

# FCC LTE REPORT

## Certification

**Applicant Name:**  
LG Electronics Inc.

**Date of Issue:**  
May 28, 2015

**Address:**  
19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si,  
Gyeonggi-do 451-713, Korea

**Test Site/Location:**  
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,  
Majang-myeon, Icheon-si, Gyeonggi-do, Korea

**Report No.:** HCT-R-1505-F008

**HCT FRN:** 0005866421

**FCC ID:** BEJLGAJ10

**APPLICANT:** LG Electronics Inc.

**FCC Model(s):** TM01LA-N  
**EUT Type:** GSM/WCDMA /LTE Telematics NAD module  
**FCC Classification:** PCS Licensed Transmitter (PCB)  
**FCC Rule Part(s):** §2 , §27

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	4M50G7D	QPSK	0.210	23.23
		4M50W7D	16QAM	0.164	22.16
LTE – Band17 (10)	709.0 – 711.0	8M96G7D	QPSK	0.157	21.97
		8M93W7D	16QAM	0.121	20.82

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M10G7D	QPSK	0.174	22.39
		1M10W7D	16QAM	0.133	21.23
LTE – Band4 (3)	1711.5 – 1753.5	2M70G7D	QPSK	0.182	22.60
		2M70W7D	16QAM	0.139	21.44
LTE – Band4 (5)	1712.5 – 1752.5	4M50G7D	QPSK	0.180	22.56
		4M50W7D	16QAM	0.166	22.20
LTE – Band4 (10)	1715.0 – 1750.0	8M99G7D	QPSK	0.180	22.54
		8M94W7D	16QAM	0.139	21.42
LTE – Band4 (15)	1717.5 – 1747.5	13M4G7D	QPSK	0.176	22.45
		13M4W7D	16QAM	0.136	21.34
LTE – Band4 (20)	1720.0 – 1745.0	17M9G7D	QPSK	0.177	22.48
		18M0W7D	16QAM	0.138	21.41

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



**Report prepared by**  
**: Kyoung Houn Seo**  
**Test engineer of RF Team**



**Approved by**  
**: Sang Jun Lee**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1505-F008	May 28, 2015	- First Approval Report

# Table of Contents

<b>1. GENERAL INFORMATION</b> .....	<b>5</b>
<b>2. INTRODUCTION</b> .....	<b>6</b>
2.1. EUT DESCRIPTION.....	6
2.2. MEASURING INSTRUMENT CALIBRATION .....	6
2.3. TEST FACILITY .....	6
<b>3. DESCRIPTION OF TESTS</b> .....	<b>7</b>
3.1 CONDUCTED OUTPUT POWER .....	7
3.2 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	8
3.3 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz).....	9
3.4 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz).....	9
3.5 PEAK-AVERAGE RATIO. ....	10
3.6 OCCUPIED BANDWIDTH. ....	12
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
<b>4. LIST OF TEST EQUIPMENT</b> .....	<b>15</b>
<b>5. SUMMARY OF TEST RESULTS</b> .....	<b>16</b>
<b>6. SAMPLE CALCULATION</b> .....	<b>17</b>
<b>7. TEST DATA</b> .....	<b>18</b>
7.1 CONDUCTED OUTPUT POWER .....	18
7.2 EFFECTIVE RADIATED POWER OUTPUT (Band 17).....	27
7.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT (Band 4).....	29
7.4 RADIATED SPURIOUS EMISSIONS .....	33
7.4.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	33
7.4.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE) .....	34
7.4.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE).....	35
7.4.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE) .....	36
7.4.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE) .....	37
7.4.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE) .....	38
7.4.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE) .....	39
7.4.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE) .....	40
7.5 PEAK-TO-AVERAGE RATIO .....	41
7.6 OCCUPIED BANDWIDTH .....	42
7.7 CONDUCTED SPURIOUS EMISSIONS.....	43
7.7.1 BAND EDGE.....	44
7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	45
7.8.1 FREQUENCY STABILITY (5 MHz Band 17 LTE) .....	45

---

7.8.2 FREQUENCY STABILITY (10 MHz Band 17 LTE).....	46
7.8.3 FREQUENCY STABILITY (1.4 MHz Band 4 LTE).....	47
7.8.4 FREQUENCY STABILITY (3 MHz Band 4 LTE).....	48
7.8.5 FREQUENCY STABILITY (5 MHz Band 4 LTE).....	49
7.8.6 FREQUENCY STABILITY (10 MHz Band 4 LTE).....	50
7.8.7 FREQUENCY STABILITY (15 MHz Band 4 LTE).....	51
7.8.8 FREQUENCY STABILITY (20 MHz Band 4 LTE).....	52
8. TEST PLOTS.....	53

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics Inc.

**Address:** 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 451-713, Korea

**FCC ID:** BEJLGAJ10

**Application Type:** Certification

**FCC Classification:** PCS Licensed Transmitter (PCB)

**FCC Rule Part(s):** §2 , §27

**EUT Type:** GSM/WCDMA /LTE Telematics NAD module

**FCC/ IC Model(s):** TM01LA-N

**Tx Frequency:** 706.5 MHz – 713.5 MHz (LTE – Band 17 (5 MHz))  
709.0 MHz – 711.0 MHz (LTE – Band 17 (10 MHz))  
1710.7 MHz – 1754.3 MHz (LTE – Band 4 (1.4 MHz))  
1711.5 MHz – 1753.5 MHz (LTE – Band 4 (3 MHz))  
1712.5 MHz – 1752.5 MHz (LTE – Band 4 (5 MHz))  
1715.0 MHz – 1750.0 MHz (LTE – Band 4 (10 MHz))  
1717.5 MHz – 1747.5 MHz (LTE – Band 4 (15 MHz))  
1720.0 MHz – 1745.0 MHz (LTE – Band 4 (20 MHz))

**Max. RF Output Power:**

Band 17 ( 5 MHz) :	0.210 W (QPSK) (23.23 dBm)
	0.164 W (16-QAM) (22.16 dBm)
Band 17 (10 MHz) :	0.157 W (QPSK) (21.97 dBm)
	0.121 W (16-QAM) (20.82 dBm)
Band 4 (1.4 MHz):	0.174 W (QPSK) (22.39 dBm)
	0.133 W (16-QAM) (21.23 dBm)
Band 4 (3 MHz):	0.182 W (QPSK) (22.60 dBm)
	0.139 W (16-QAM) (21.44 dBm)
Band 4 (5 MHz):	0.180 W (QPSK) (22.56 dBm)
	0.166 W (16-QAM) (22.20 dBm)
Band 4 (10 MHz):	0.180 W (QPSK) (22.54 dBm)
	0.139 W (16-QAM) (21.42 dBm)
Band 4 (15 MHz):	0.176 W (QPSK) (22.45 dBm)
	0.136 W (16-QAM) (21.34 dBm)
Band 4 (20 MHz):	0.177 W (QPSK) (22.48 dBm)
	0.138 W (16-QAM) (21.41 dBm)

**Emission Designator(s):**

Band 17 ( 5 MHz) :	4M50G7D (QPSK) / 4M50W7D (16-QAM)
Band 17 (10 MHz) :	8M96G7D (QPSK) / 8M93W7D (16-QAM)
Band 4 (1.4 MHz):	1M10G7D (QPSK) / 1M10W7D (16-QAM)
Band 4 (3 MHz):	2M70G7D (QPSK) / 2M70W7D (16-QAM)
Band 4 (5 MHz):	4M50G7D (QPSK) / 4M50W7D (16-QAM)
Band 4 (10 MHz):	8M99G7D (QPSK) / 8M94W7D (16-QAM)
Band 4 (15 MHz):	13M4G7D (QPSK) / 13M4W7D (16-QAM)
Band 4 (20 MHz):	17M9G7D (QPSK) / 18M0W7D (16-QAM)

**Date(s) of Tests:** April 22, 2015 ~ May 28, 2015

**Antenna Specification**

Manufacturer: Laird Technologies  
Antenna type: MIMO capable vehicle dome antenna  
Peak Gain: Band 17: -3.03 dBi  
Peak Gain: Band 4: -0.13 dBi

## **2. INTRODUCTION**

### **2.1. EUT DESCRIPTION**

The LG Electronics Inc. TM01LA-N GSM/WCDMA /LTE Telematics NAD module consists of LTE 4 and 17.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.**

## **3. DESCRIPTION OF TESTS**

### **3.1 CONDUCTED OUTPUT POWER**

#### Test Procedure

Conducted Output Power is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.2.

#### **5.2.1 Procedure for use with a spectrum/signal analyzer when EUT can be configured to transmit continuously or when sweep triggering/signal gating can be properly implemented**

The EUT is considered to transmit continuously if it can be configured to transmit at a burst duty cycle of greater than or equal to 98% throughout the duration of the measurement. If this condition can be achieved, then the following procedure can be used to measure the average output power of the EUT.

This procedure can also be used when the EUT cannot be configured to transmit continuously, provided that the measurement instrument can be configured to trigger a sweep at the beginning of each full-power transmission burst, and the sweep time is less than or equal to the minimum transmission time during each burst (*i.e.*, no burst off-time is to be included in the measurement).

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Set number of points in sweep  $\geq 2 \times$  span / RBW.
- e) Sweep time = auto-couple.
- f) Detector = RMS (power averaging).
- g) If the EUT can be configured to transmit continuously (*i.e.*, burst duty cycle  $\geq 98\%$ ), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (*i.e.*, burst duty cycle  $< 98\%$ ), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 3.2 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

#### Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-D-2010 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

#### **Radiated spurious emissions**

: Frequency Range : 30 MHz ~ 10<sup>th</sup> Harmonics of highest channel fundamental frequency.

### 3.3 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)

§27.5(c)

698-746 MHz Band. The following frequencies are available for licensing pursuant to this part in the 698–746 MHz band: (1) Three paired channel blocks of 12 MHz each are available for assignment as follows :

Block A : 698 – 704 MHz and 728 – 734 MHz ;


Block B : 704 – 710 MHz and 734 – 740 MHz ; and

Block C : 710 – 716 MHz and 740 – 746 MHz.

The EUT is only being authorized for operation in Blocks B and C.

### 3.4 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz)

§27.5(h)

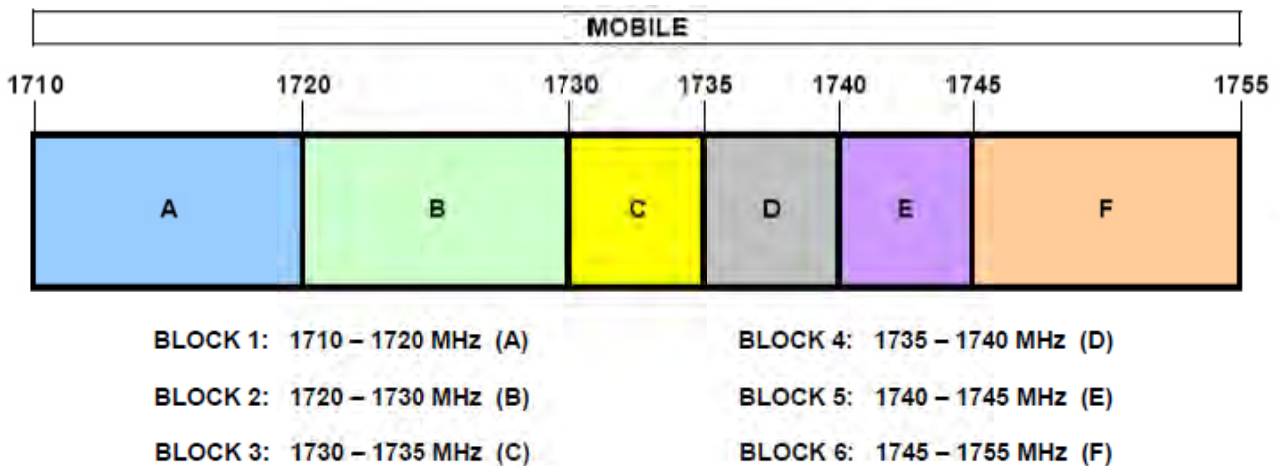

### 3.5 PEAK-AVERAGE RATIO.

#### Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

#### - Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
  - 1) for continuous transmissions, set to 1 ms,
  - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

#### - Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as  $P_{Pk}$ . Use one of the applicable procedures presented 5.2 to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:  $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$  ( $P_{Avg}$  = Average Power + Duty cycle Factor)

#### 5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW  $\geq$  OBW.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 2 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points  $\geq$  span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

## **5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented**

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

### **5.2.2.2 Constant burst duty cycle**


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add  $10 \log (1/0.25) = 6$  dB if the duty cycle is a constant 25%.

### 3.6 OCCUPIED BANDWIDTH.

#### Test set-up

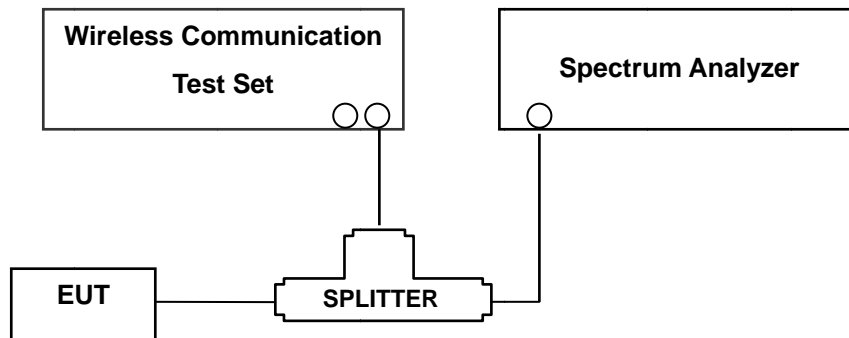

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

### 3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

#### Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.


The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz bandwidth may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency

**NOTES:** The analyzer plot offsets were determined by below conditions.

- For LTE Band 17, total offset 26.6 dB = 20 dB attenuator + 6 dB Divider + 0.6 dB RF cables.
- For LTE Band 4, total offset 27.2 dB = 20 dB attenuator + 6 dB Divider + 1.2 dB RF cables.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

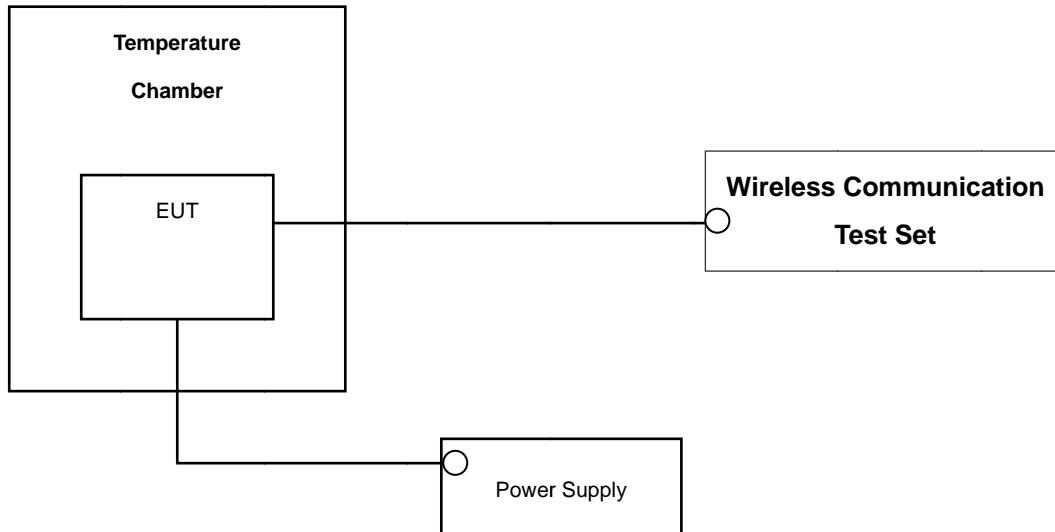

\* Nominal Operating Voltage

#### Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-D-2010 section 2.2.2

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	N1921A/ Power Sensor	MY45241059	Annual	07/09/2015
Agilent	N1911A/ Power Meter	MY45100523	Annual	01/15/2016
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/04/2015
Wainwright	WHK1.2/15G-10EF/H.P.F	4	Annual	06/17/2015
Wainwright	WRCJV2400/2483.5-2370/2520-60/12SS / B.R.F.	1	Annual	06/17/2015
Wainwright	WHK3.3/18G-10EF/H.P.F	2	Annual	06/17/2015
Hewlett Packard	11667B / Power Splitter	10545	Annual	02/22/2016
Hewlett Packard	11667B / Power Splitter	11275	Annual	04/29/2016
Digital	EP-3010/ Power Supply	3110117	Annual	10/29/2015
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/23/2017
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/23/2017
Korea Engineering	KR-1005L / Chamber	KRAC05063-3CH	Annual	10/29/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	09/01/2016
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	Biennial	10/05/2015
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170541	Biennial	07/05/2015
WEINSCHL	ATTENUATOR	BR0592	Annual	10/22/2015
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/09/2015
Agilent	8960 (E5515C)/ Base Station	MY48360222	Annual	08/26/2015
Agilent	N9020A/ Signal Analyzer	MY51240695	Annual	02/12/2016
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	Annual	03/24/2016

## 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 27.53(g), 27.53(h)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 +10 log <sub>10</sub> (P[Watts]) at Band Edge and for all-of-band emissions		PASS
27.50(d)(5)	Peak-Average Ratio	< 13 dB		PASS
2.1046	Conducted Output Power	N/A		PASS
2.1055, 27.54	Frequency stability / variation of ambient temperature	Emission must remain in band		PASS
27.50(c)(10)	Effective Radiated Power (Band 17)	< 3 Watts max. ERP	RADIATED	PASS
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS
2.1053, 27.53(g), 27.53(h)	Undesirable Out-of-Band Emissions	< 43 +10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS
	Receiver Spurious Emissions	Cf.)Section 7.13-7.15		PASS

## 6. SAMPLE CALCULATION

### A. EIRP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
LTE Band4	20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

**EIRP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a wooden tripod is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (EIRP).

### B. Emission Designator

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info


D = Data transmission; telemetry; telecommand

## 7. TEST DATA

### 7.1 CONDUCTED OUTPUT POWER

Conducted Output Power is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.2.

A base station simulator was used to establish communication with the EUT, and Spectrum analyzer was used for test results. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

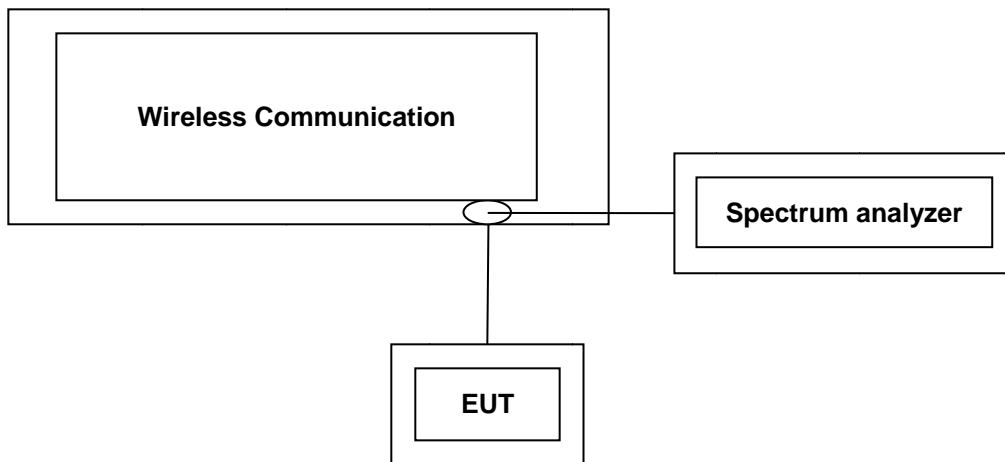

Test Result

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 17	5	706.5	23755	1	0	23.38	22.38
				1	12	23.15	22.16
				1	24	23.22	22.18
				12	0	22.31	21.34
				12	6	22.26	21.24
				12	11	22.22	21.22
				25	0	22.22	21.22
		710.0	23790	1	0	23.29	22.14
				1	12	23.35	22.23
				1	24	23.57	22.60
				12	0	22.20	21.22
				12	6	22.14	21.26
				12	11	22.32	21.44
				25	0	22.38	21.30
		713.5	23825	1	0	23.58	22.43
				1	12	23.56	22.53
				1	24	23.22	22.26
				12	0	22.50	21.56
				12	6	22.49	21.58
				12	11	22.45	21.48
				25	0	22.49	21.50

LTE Conducted Average Output Powers (5 MHz Band 17 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 17	10	709.0	23780	1	0	23.33	22.19
				1	24	23.18	22.07
				1	49	23.56	22.41
				25	0	22.08	21.11
				25	12	22.27	21.15
				25	24	22.28	21.29
				50	0	22.21	21.20
		710.0	23790	1	0	23.20	22.06
				1	24	23.22	22.11
				1	49	23.18	22.19
				25	0	22.12	21.09
				25	12	22.16	21.15
				25	24	22.37	21.45
				50	0	22.17	21.19
		711.0	23800	1	0	23.14	22.01
				1	24	23.34	22.28
				1	49	23.37	22.37
				25	0	22.17	21.08
				25	12	22.16	21.25
				25	24	22.36	21.40
				50	0	22.28	21.24

LTE Conducted Average Output Powers (10 MHz Band 17 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	1.4	1710.7	19957	1	0	23.67	22.46
				1	3	23.66	22.50
				1	5	23.66	22.51
				3	0	23.63	22.59
				3	1	23.64	22.53
				3	3	23.62	22.52
				6	0	22.58	21.61
		1732.5	20175	1	0	23.22	22.15
				1	3	23.27	22.29
				1	5	23.27	22.25
				3	0	23.18	22.21
				3	1	23.18	22.23
				3	3	23.23	22.31
				6	0	22.21	21.19
		1754.3	20393	1	0	23.68	22.58
				1	3	23.59	22.55
				1	5	23.57	22.48
				3	0	23.60	22.59
				3	1	23.60	22.56
				3	3	23.56	22.55
				6	0	22.55	21.61

LTE Conducted Average Output Powers (1.4 MHz Band 4 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	3	1711.5	19965	1	0	23.65	22.50
				1	7	23.61	22.47
				1	14	23.47	22.40
				8	0	22.51	21.43
				8	3	22.48	21.42
				8	7	22.52	21.46
				15	0	22.53	21.45
		1732.5	20175	1	0	23.27	22.23
				1	7	23.26	22.30
				1	14	23.29	22.17
				8	0	22.29	21.17
				8	3	22.16	21.13
				8	7	22.27	21.19
				15	0	22.24	21.16
		1753.5	20385	1	0	23.60	22.64
				1	7	23.61	22.54
				1	14	23.57	22.42
				8	0	22.64	21.66
				8	3	22.60	21.52
				8	7	22.58	21.53
				15	0	22.52	21.58

LTE Conducted Average Output Powers (3 MHz Band 4 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	5	1712.5	19975	1	0	23.69	22.52
				1	12	23.49	22.41
				1	24	23.48	22.39
				12	0	22.55	21.57
				12	6	22.42	21.43
				12	11	22.35	21.44
				25	0	22.51	21.40
		1732.5	20175	1	0	23.32	22.30
				1	12	23.35	22.29
				1	24	23.26	22.15
				12	0	22.28	21.19
				12	6	22.18	21.09
				12	11	22.23	21.17
				25	0	22.24	21.09
		1752.5	20375	1	0	23.71	22.63
				1	12	23.66	22.62
				1	24	23.60	22.48
				12	0	22.64	21.72
				12	6	22.64	21.72
				12	11	22.51	21.59
				25	0	22.60	21.68

LTE Conducted Average Output Powers (5 MHz Band 4 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	10	1715.0	20000	1	0	23.67	22.54
				1	24	23.45	22.40
				1	49	23.24	22.21
				25	0	22.48	21.52
				25	12	22.43	21.36
				25	24	22.35	21.36
				50	0	22.26	21.29
		1732.5	20175	1	0	23.17	22.14
				1	24	23.21	22.10
				1	49	23.32	22.16
				25	0	22.33	21.26
				25	12	22.26	21.19
				25	24	22.18	21.22
				50	0	22.18	21.13
		1750.0	20350	1	0	23.72	22.68
				1	24	23.68	22.62
				1	49	23.56	22.44
				25	0	22.65	21.64
				25	12	22.69	21.68
				25	24	22.59	21.61
				50	0	22.60	21.51

LTE Conducted Average Output Powers (10 MHz Band 4 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	15	1717.5	20025	1	0	23.53	22.50
				1	36	23.34	22.35
				1	74	23.27	22.26
				36	0	22.47	21.44
				36	18	22.32	21.34
				36	38	22.24	21.34
				75	0	22.20	21.32
		1732.5	20175	1	0	23.37	22.35
				1	36	23.17	22.14
				1	74	23.39	22.28
				36	0	22.25	21.26
				36	18	22.25	21.18
				36	38	22.20	21.17
				75	0	22.24	21.18
		1747.5	20325	1	0	23.71	22.59
				1	36	23.73	22.72
				1	74	23.54	22.48
				36	0	22.61	21.59
				36	18	22.58	21.61
				36	38	22.66	21.63
				75	0	22.51	21.52

LTE Conducted Average Output Powers (15 MHz Band 4 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	20	1720.0	20050	1	0	23.57	22.48
				1	49	23.34	22.31
				1	99	23.29	22.27
				50	0	22.29	21.27
				50	25	22.19	21.29
				50	49	22.18	21.19
				100	0	22.23	21.33
		1732.5	20175	1	0	23.40	22.41
				1	49	23.15	22.15
				1	99	23.46	22.38
				50	0	22.22	21.15
				50	25	22.19	21.09
				50	49	22.17	21.18
				100	0	22.26	21.26
		1745.0	20300	1	0	23.60	22.60
				1	49	23.73	22.65
				1	99	23.58	22.52
				50	0	22.65	21.56
				50	25	22.68	21.66
				50	49	22.58	21.52
				100	0	22.58	21.38

LTE Conducted Average Output Powers (20 MHz Band 4 LTE)

Note : Detecting mode is average.

### 7.2 EFFECTIVE RADIATED POWER OUTPUT (Band 17)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-28.43	32.38	-10.19	0.81	H	0.138	21.38
		16-QAM	-29.58	31.23	-10.19	0.81	H	0.106	20.23
710.0		QPSK	-27.21	33.71	-10.21	0.81	H	0.186	22.69
		16-QAM	-28.40	32.52	-10.21	0.81	H	0.141	21.50
713.5		QPSK	-26.65	34.28	-10.23	0.82	H	0.210	23.23
		16-QAM	-27.72	33.21	-10.23	0.82	H	0.164	22.16

#### Effective Radiated Power Data (5 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-28.38	32.50	-10.20	0.81	H	0.141	21.49
		16-QAM	-29.50	31.38	-10.20	0.81	H	0.109	20.37
710.0		QPSK	-28.19	32.79	-10.20	0.81	H	0.151	21.78
		16-QAM	-29.34	31.64	-10.20	0.81	H	0.116	20.63
711.0		QPSK	-27.92	32.99	-10.21	0.81	H	0.157	21.97
		16-QAM	-29.07	31.84	-10.21	0.81	H	0.121	20.82

#### Effective Radiated Power Data (10 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

**NOTES:**Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

### 7.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT (Band 4)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-18.66	13.82	9.88	1.31	V	0.174	22.39
		16-QAM	-19.82	12.66	9.88	1.31	V	0.133	21.23
1732.5		QPSK	-18.80	13.68	9.96	1.32	V	0.171	22.32
		16-QAM	-19.90	12.58	9.96	1.32	V	0.132	21.22
1754.3		QPSK	-19.03	13.42	10.01	1.33	V	0.162	22.10
		16-QAM	-20.11	12.34	10.01	1.33	V	0.126	21.02

#### Equivalent Isotropic Radiated Power Data (1.4 MHz Band 4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-18.45	14.03	9.88	1.31	V	0.182	22.60
		16-QAM	-19.61	12.87	9.88	1.31	V	0.139	21.44
1732.5		QPSK	-18.77	13.71	9.95	1.32	V	0.171	22.34
		16-QAM	-19.89	12.59	9.95	1.32	V	0.132	21.22
1753.5		QPSK	-18.89	13.55	10.01	1.33	V	0.167	22.23
		16-QAM	-20.07	12.37	10.01	1.33	V	0.127	21.05

#### Equivalent Isotropic Radiated Power Data (3 MHz Band 4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-18.49	13.99	9.88	1.31	V	0.180	22.56
		16-QAM	-18.85	13.63	9.88	1.31	V	0.166	22.20
1732.5		QPSK	-18.54	13.93	9.95	1.32	V	0.180	22.56
		16-QAM	-19.64	12.83	9.95	1.32	V	0.140	21.46
1752.5		QPSK	-18.90	13.53	10.01	1.33	V	0.166	22.21
		16-QAM	-20.01	12.42	10.01	1.33	V	0.129	21.10

**Equivalent Isotropic Radiated Power Data (5 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-18.51	13.97	9.88	1.31	V	0.180	22.54
		16-QAM	-19.63	12.85	9.88	1.31	V	0.139	21.42
1732.5		QPSK	-18.83	13.64	9.94	1.32	V	0.168	22.26
		16-QAM	-19.84	12.63	9.94	1.32	V	0.133	21.25
1750.0		QPSK	-18.86	13.64	10.00	1.33	V	0.170	22.31
		16-QAM	-19.97	12.53	10.00	1.33	V	0.132	21.20

**Equivalent Isotropic Radiated Power Data (10 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-18.60	13.88	9.88	1.31	V	0.176	22.45
		16-QAM	-19.71	12.77	9.88	1.31	V	0.136	21.34
1732.5		QPSK	-18.89	13.58	9.93	1.32	V	0.166	22.19
		16-QAM	-19.91	12.56	9.93	1.32	V	0.131	21.17
1747.5		QPSK	-18.81	13.75	9.98	1.32	V	0.174	22.41
		16-QAM	-19.93	12.63	9.98	1.32	V	0.135	21.29

**Equivalent Isotropic Radiated Power Data (15 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-18.66	13.82	9.88	1.31	V	0.174	22.39
		16-QAM	-19.74	12.74	9.88	1.31	V	0.135	21.31
1732.5		QPSK	-18.97	13.49	9.92	1.31	V	0.162	22.10
		16-QAM	-19.98	12.48	9.92	1.31	V	0.129	21.09
1745.0		QPSK	-18.70	13.83	9.97	1.32	V	0.177	22.48
		16-QAM	-19.77	12.76	9.97	1.32	V	0.138	21.41

**Equivalent Isotropic Radiated Power Data (20 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

**NOTES:**Equivalent Isotropic Radiated Power Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

## 7.4 RADIATED SPURIOUS EMISSIONS

### 7.4.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

▣ OPERATING FREQUENCY :	<u>713.5 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>23.23 dBm = 0.210 W</u>
▣ MODULATION SIGNAL:	<u>5 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>36.23 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-43.91	7.82	-49.69	1.18	H	-43.05	66.28
	2,119.50	-55.38	9.55	-60.57	1.46	V	-52.48	75.71
	2,826.00	-58.63	10.84	-62.62	1.71	V	-53.49	76.72
23790 (710.00)	1,420.00	-45.11	7.86	-50.82	1.19	H	-44.15	67.38
	2,130.00	-51.32	9.49	-55.76	1.45	V	-47.72	70.95
	2,840.00	-57.39	10.90	-61.29	1.72	V	-52.11	75.34
23825 (713.50)	1,427.00	-45.41	7.90	-51.00	1.19	H	-44.29	67.52
	2,140.50	-43.98	9.42	-48.46	1.46	V	-40.50	63.73
	2,854.00	-56.80	10.95	-60.88	1.69	H	-51.62	74.85

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

### 7.4.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY : 711.0 MHz
- ▣ MEASURED OUTPUT POWER: 21.97 dBm = 0.157 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.97 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-45.57	7.85	-51.30	1.19	H	-44.64	66.61
	2,127.00	-53.95	9.51	-58.62	1.45	H	-50.56	72.53
	2,836.00	-58.41	10.88	-62.31	1.71	H	-53.14	75.11
23790 (710.00)	1,420.00	-44.69	7.86	-50.40	1.19	V	-43.73	65.70
	2,130.00	-55.21	9.49	-59.65	1.45	V	-51.61	73.58
	2,840.00	-55.88	10.90	-59.78	1.72	V	-50.60	72.57
23800 (711.00)	1,422.00	-45.06	7.87	-50.73	1.19	H	-44.05	66.02
	2,133.00	-54.23	9.47	-58.69	1.45	H	-50.67	72.64
	2,844.00	-55.57	10.92	-59.53	1.71	H	-50.32	72.29

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

### 7.4.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1710.70 MHz
- ▣ MEASURED OUTPUT POWER: 22.39 dBm = 0.174 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  35.39 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-50.51	12.36	-55.59	1.94	V	-45.17	67.56
	5,132.10	-37.61	12.34	-35.69	2.37	V	-25.72	48.11
	6,842.80	-49.09	12.17	-42.59	2.81	V	-33.23	55.62
20175 (1732.5)	3,465.00	-55.87	12.27	-60.43	1.87	V	-50.03	72.42
	5,197.50	-43.65	12.63	-42.10	2.45	V	-31.92	54.31
	6,930.00	-54.74	11.87	-47.14	2.84	V	-38.11	60.50
20393 (1754.3)	3,508.60	-55.09	12.15	-59.21	2.00	V	-49.06	71.45
	5,262.90	-41.45	12.91	-40.65	2.41	V	-30.15	52.54
	7,017.20	-50.98	11.57	-43.36	2.90	V	-34.69	57.08

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

### 7.4.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1711.50 MHz
- ▣ MEASURED OUTPUT POWER: 22.60 dBm = 0.182 W
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  35.60 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-51.56	12.35	-56.66	1.94	V	-46.25	68.85
	5,134.50	-38.03	12.35	-36.04	2.37	V	-26.06	48.66
	6,846.00	-53.60	12.16	-47.11	2.80	V	-37.75	60.35
20175 (1732.5)	3,465.00	-54.85	12.27	-59.41	1.87	V	-49.01	71.61
	5,197.50	-39.87	12.63	-38.32	2.45	V	-28.14	50.74
	6,930.00	-53.60	11.87	-46.00	2.84	V	-36.97	59.57
20385 (1753.5)	3,507.00	-54.65	12.15	-58.77	1.99	V	-48.61	71.21
	5,260.50	-40.71	12.90	-39.88	2.42	V	-29.40	52.00
	7,014.00	-53.29	11.59	-45.82	2.91	V	-37.14	59.74

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

### 7.4.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

▣ OPERATING FREQUENCY :	<u>1712.50 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>22.56 dBm = 0.180 W</u>
▣ MODULATION SIGNAL:	<u>5 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>35.56 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-51.46	12.35	-56.60	1.95	V	-46.20	68.76
	5,137.50	-35.42	12.36	-33.34	2.38	V	-23.36	45.92
	6,850.00	-54.18	12.15	-47.70	2.80	V	-38.35	60.91
20175 (1732.5)	3,465.00	-56.30	12.27	-60.86	1.87	V	-50.46	73.02
	5,197.50	-41.92	12.63	-40.37	2.45	V	-30.19	52.75
	6,930.00	-54.34	11.87	-46.74	2.84	V	-37.71	60.27
20375 (1752.5)	3,505.00	-54.94	12.15	-59.07	1.98	V	-48.90	71.46
	5,257.50	-39.89	12.89	-39.06	2.41	V	-28.58	51.14
	7,010.00	-55.24	11.61	-47.96	2.91	V	-39.26	61.82

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

### 7.4.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1715.00 MHz
- ▣ MEASURED OUTPUT POWER: 22.54 dBm = 0.180 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  35.54 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-51.39	12.34	-56.62	1.95	V	-46.23	68.77
	5,145.00	-37.28	12.38	-35.24	2.39	V	-25.25	47.79
	6,860.00	-53.59	12.11	-47.15	2.81	V	-37.85	60.39
20175 (1732.5)	3,465.00	-55.48	12.27	-60.04	1.87	V	-49.64	72.18
	5,197.50	-40.67	12.63	-39.12	2.45	V	-28.94	51.48
	6,930.00	-53.66	11.87	-46.06	2.84	V	-37.03	59.57
20350 (1750.0)	3,500.00	-57.53	12.15	-61.68	1.95	V	-51.48	74.02
	5,250.00	-38.82	12.87	-37.98	2.39	V	-27.50	50.04
	7,000.00	-59.24	11.65	-52.57	2.85	V	-43.77	66.31

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

### 7.4.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1717.50 MHz
- ▣ MEASURED OUTPUT POWER: 22.45 dBm = 0.176 W
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  35.45 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-51.05	12.34	-56.03	1.92	V	-45.61	68.06
	5,152.50	-41.56	12.40	-39.67	2.39	V	-29.66	52.11
	6,870.00	-49.73	12.08	-43.47	2.79	V	-34.18	56.63
20175 (1732.5)	3,465.00	-53.39	12.27	-57.95	1.87	V	-47.55	70.00
	5,197.50	-45.89	12.63	-44.34	2.45	V	-34.16	56.61
	6,930.00	-53.45	11.87	-45.85	2.84	V	-36.82	59.27
20325 (1747.5)	3,495.00	-56.09	12.17	-60.36	1.93	V	-50.12	72.57
	5,242.50	-39.08	12.83	-38.09	2.41	V	-27.67	50.12
	6,990.00	-55.96	11.68	-48.05	2.80	V	-39.17	61.62

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

### 7.4.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

▣ OPERATING FREQUENCY :	<u>1720.00 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>22.48 dBm = 0.177 W</u>
▣ MODULATION SIGNAL:	<u>20 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>35.48 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-50.76	12.33	-55.47	1.89	V	-45.03	67.51
	5,160.00	-37.80	12.44	-36.01	2.40	V	-25.97	48.45
	6,880.00	-50.78	12.04	-44.07	2.78	V	-34.81	57.29
20175 (1732.5)	3,465.00	-52.07	12.27	-56.63	1.87	V	-46.23	68.71
	5,197.50	-44.69	12.63	-43.14	2.45	V	-32.96	55.44
	6,930.00	-54.53	11.87	-46.93	2.84	V	-37.90	60.38
20300 (1745.0)	3,490.00	-58.69	12.18	-63.09	1.90	V	-52.81	75.29
	5,235.00	-37.16	12.80	-35.97	2.42	V	-25.59	48.07
	6,980.00	-55.52	11.71	-47.36	2.79	V	-38.44	60.92

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. This device uses 1m cables interchangeably. After testing under all configurations, worst case has been determined for the 1m cable.

### 7.5 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
Band 4	1.4 MHz	1732.5	QPSK	6	0	4.76
			16-QAM	6	0	5.62
	3 MHz		QPSK	15	0	5.12
			16-QAM	15	0	5.94
	5 MHz		QPSK	25	0	5.03
			16-QAM	25	0	5.80
	10 MHz		QPSK	50	0	5.15
			16-QAM	50	0	5.84
	15 MHz		QPSK	75	0	4.94
			16-QAM	75	0	5.72
	20 MHz		QPSK	100	0	5.15
			16-QAM	100	0	5.86

- Plots of the EUT's Peak- to- Average Ratio are shown Page 62~ 67.

### 7.6 OCCUPIED BANDWIDTH

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Band 17	5	710.0	QPSK	25	0	4.5043
			16-QAM	25	0	4.4985
	10		QPSK	50	0	8.9641
			16-QAM	50	0	8.9349

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Band 4	1.4	1732.5	QPSK	6	0	1.0954
			16-QAM	6	0	1.0979
	3		QPSK	15	0	2.6977
			16-QAM	15	0	2.7022
	5		QPSK	25	0	4.4957
			16-QAM	25	0	4.5049
	10		QPSK	50	0	8.9942
			16-QAM	50	0	8.9385
	15		QPSK	75	0	13.4470
			16-QAM	75	0	13.4370
	20		QPSK	100	0	17.9170
			16-QAM	100	0	17.9510

- Plots of the EUT's Occupied Bandwidth are shown Page 54 ~ 61.

### 7.7 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 17	5	706.5	QPSK	1	0	3.137741	-32.35
		710.0		1	0	3.194399	-31.48
		713.5		1	0	2.817673	-31.13
	10	709.0		1	0	2.686962	-32.30
		710.0		1	0	2.651178	-31.49
		711.0		1	0	3.037347	-31.50
				1	0		

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 4	1.4	1710.7	QPSK	1	0	19.9970	-27.11
		1732.5		1	0	19.2110	-27.79
		1754.3		1	0	19.9710	-26.07
	3	1711.5		1	0	19.6370	-26.28
		1732.5		1	0	19.4635	-27.45
		1753.5		1	0	19.5885	-25.59
	5	1712.5		1	0	19.9850	-27.34
		1732.5		1	0	19.7690	-26.62
		1752.5		1	0	19.1310	-27.20
	10	1715.0		1	0	19.5875	-26.50
		1732.5		1	0	16.4185	-27.19
		1750.0		1	0	19.9890	-27.20
	15	1717.5		1	0	19.1975	-26.91
		1732.5		1	0	19.9870	-26.54
		1747.5		1	0	18.9900	-26.27
	20	1720.0		1	0	19.1255	-27.27
		1732.5		1	0	19.6080	-27.45
		1745.0		1	0	19.1825	-27.17

- Plots of the EUT's Conducted Spurious Emissions are shown Page 92 ~ 115.

**7.7.1 BAND EDGE**


- Plots of the EUT's Band Edge are shown Page 68 ~ 91

## 7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

### 7.8.1 FREQUENCY STABILITY (5 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY: 710,000,000 Hz
- ▣ CHANNEL: 23790 (5 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	709 999 998	0	0.000 000	0.000
100%		-30	709 999 993	-5.00	-0.000 001	-0.007
100%		-20	710 000 000	2.20	0.000 000	0.003
100%		-10	709 999 996	-2.00	0.000 000	-0.003
100%		0	709 999 995	-2.60	0.000 000	-0.004
100%		+10	709 999 993	-4.70	-0.000 001	-0.007
100%		+30	709 999 992	-6.30	-0.000 001	-0.009
100%		+40	709 999 993	-4.70	-0.000 001	-0.007
100%		+50	709 999 993	-5.10	-0.000 001	-0.007
Batt. Endpoint	10.2	+20	709 999 996	-1.90	0.000 000	-0.003

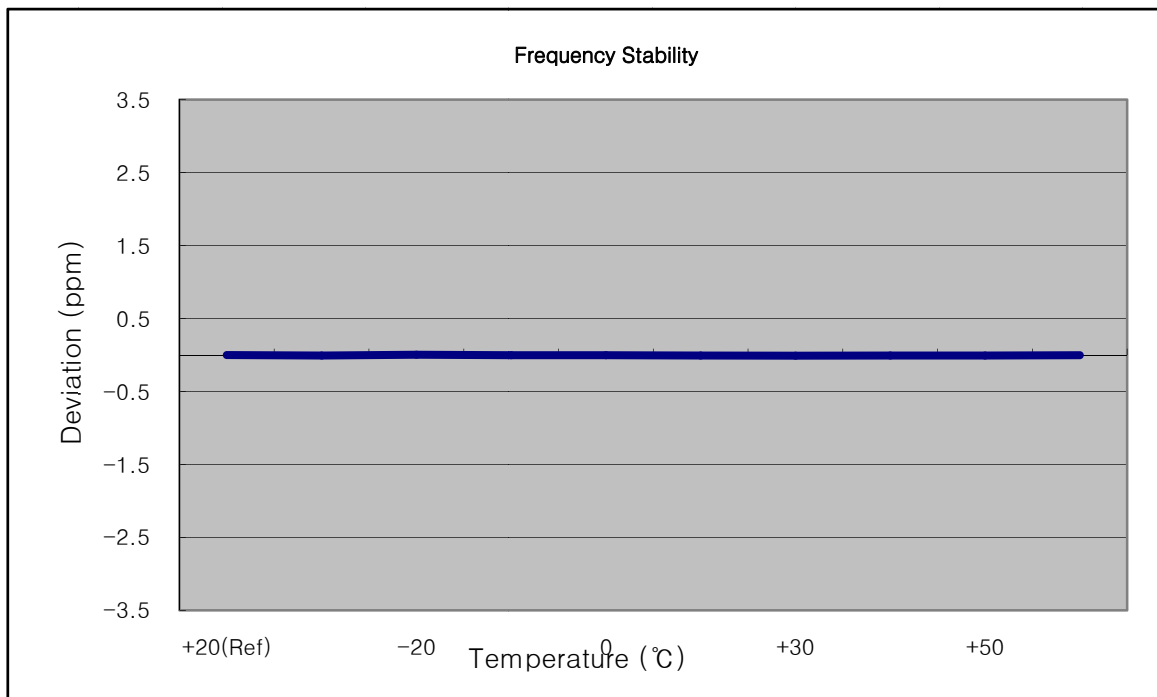

**7.8.2 FREQUENCY STABILITY (10 MHz Band 17 LTE)**

- ▣ OPERATING FREQUENCY: 710,000,000 Hz
- ▣ CHANNEL: 23790 (10 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	709 999 996	0	0.000 000	0.000
100%		-30	709 999 992	-4.10	-0.000 001	-0.006
100%		-20	709 999 993	-3.80	-0.000 001	-0.005
100%		-10	709 999 999	2.80	0.000 000	0.004
100%		0	709 999 994	-2.50	0.000 000	-0.004
100%		+10	709 999 991	-5.20	-0.000 001	-0.007
100%		+30	709 999 992	-4.30	-0.000 001	-0.006
100%		+40	709 999 993	-3.70	-0.000 001	-0.005
100%		+50	709 999 992	-4.50	-0.000 001	-0.006
Batt. Endpoint	10.2	+20	709 999 994	-2.60	0.000 000	-0.004

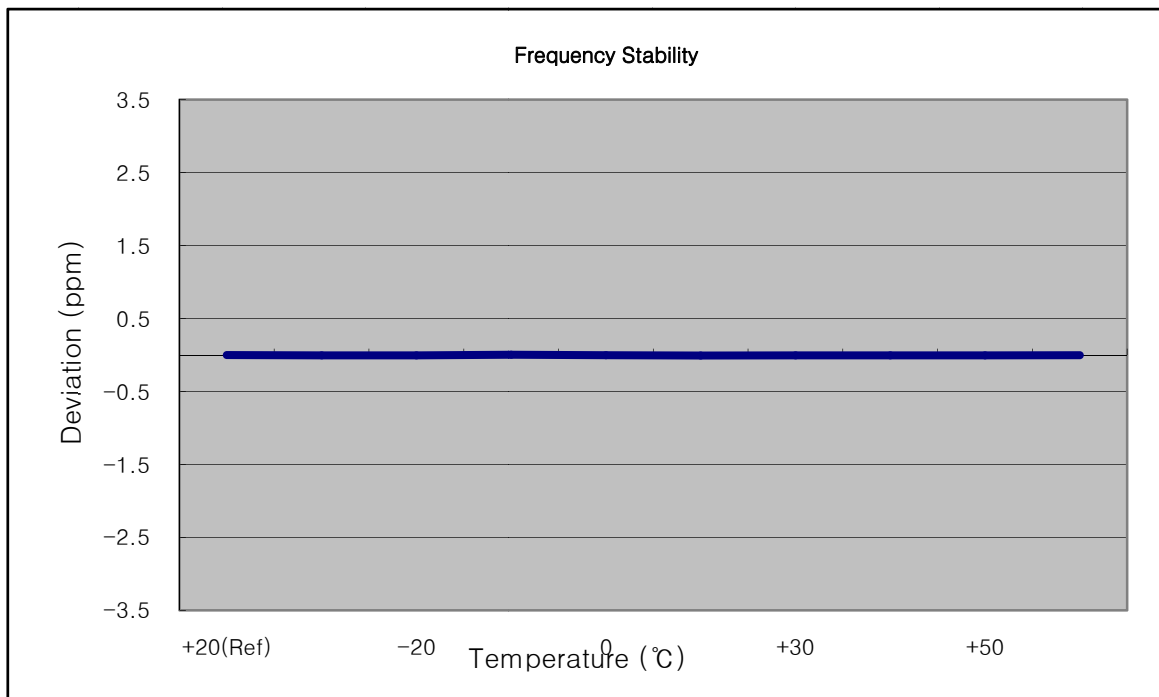

**7.8.3 FREQUENCY STABILITY (1.4 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1732 499 994	0	0.000 000	0.000
100%		-30	1732 499 986	-8.10	0.000 000	-0.005
100%		-20	1732 500 002	8.20	0.000 000	0.005
100%		-10	1732 499 989	-4.40	0.000 000	-0.003
100%		0	1732 500 001	6.90	0.000 000	0.004
100%		+10	1732 500 003	9.20	0.000 001	0.005
100%		+30	1732 499 984	-10.10	-0.000 001	-0.006
100%		+40	1732 499 985	-8.40	0.000 000	-0.005
100%		+50	1732 499 982	-11.60	-0.000 001	-0.007
Batt. Endpoint	10.2	+20	1732 500 006	12.70	0.000 001	0.007

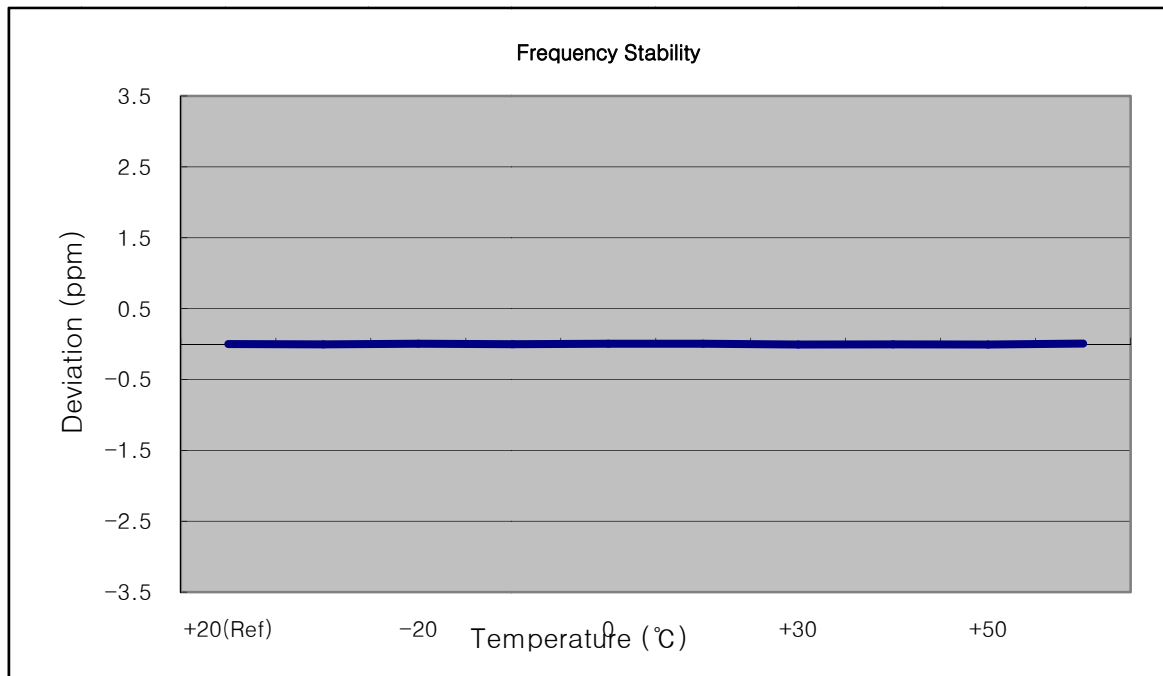

**7.8.4 FREQUENCY STABILITY (3 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (3 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1732 499 993	0	0.000 000	0.000
100%		-30	1732 499 997	4.10	0.000 000	0.002
100%		-20	1732 500 003	9.50	0.000 001	0.005
100%		-10	1732 499 999	5.70	0.000 000	0.003
100%		0	1732 500 002	8.30	0.000 000	0.005
100%		+10	1732 500 005	11.70	0.000 001	0.007
100%		+30	1732 499 986	-7.70	0.000 000	-0.004
100%		+40	1732 500 001	7.90	0.000 000	0.005
100%		+50	1732 499 985	-8.40	0.000 000	-0.005
Batt. Endpoint	10.2	+20	1732 499 999	5.30	0.000 000	0.003

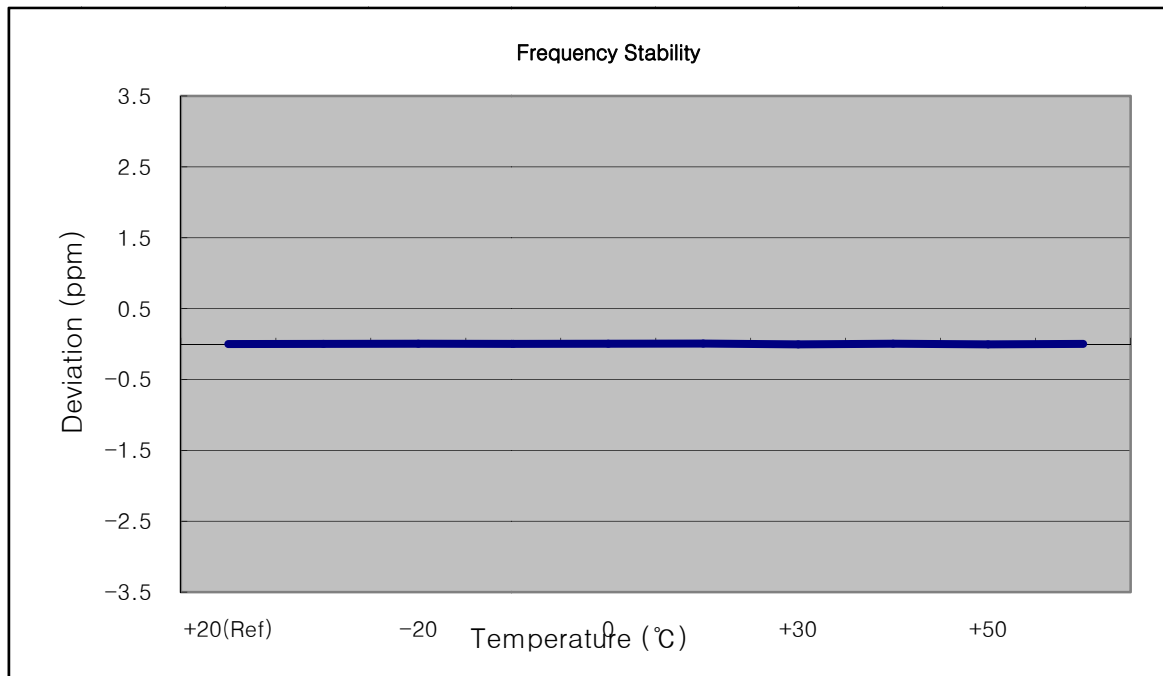

**7.8.5 FREQUENCY STABILITY (5 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1732 500 004	0	0.000 000	0.000
100%		-30	1732 500 016	11.30	0.000 001	0.007
100%		-20	1732 500 012	7.20	0.000 000	0.004
100%		-10	1732 500 009	4.80	0.000 000	0.003
100%		0	1732 500 014	9.80	0.000 001	0.006
100%		+10	1732 499 996	-8.90	-0.000 001	-0.005
100%		+30	1732 500 010	6.00	0.000 000	0.003
100%		+40	1732 500 014	9.40	0.000 001	0.005
100%		+50	1732 500 009	4.10	0.000 000	0.002
Batt. Endpoint	10.2	+20	1732 499 999	-5.60	0.000 000	-0.003

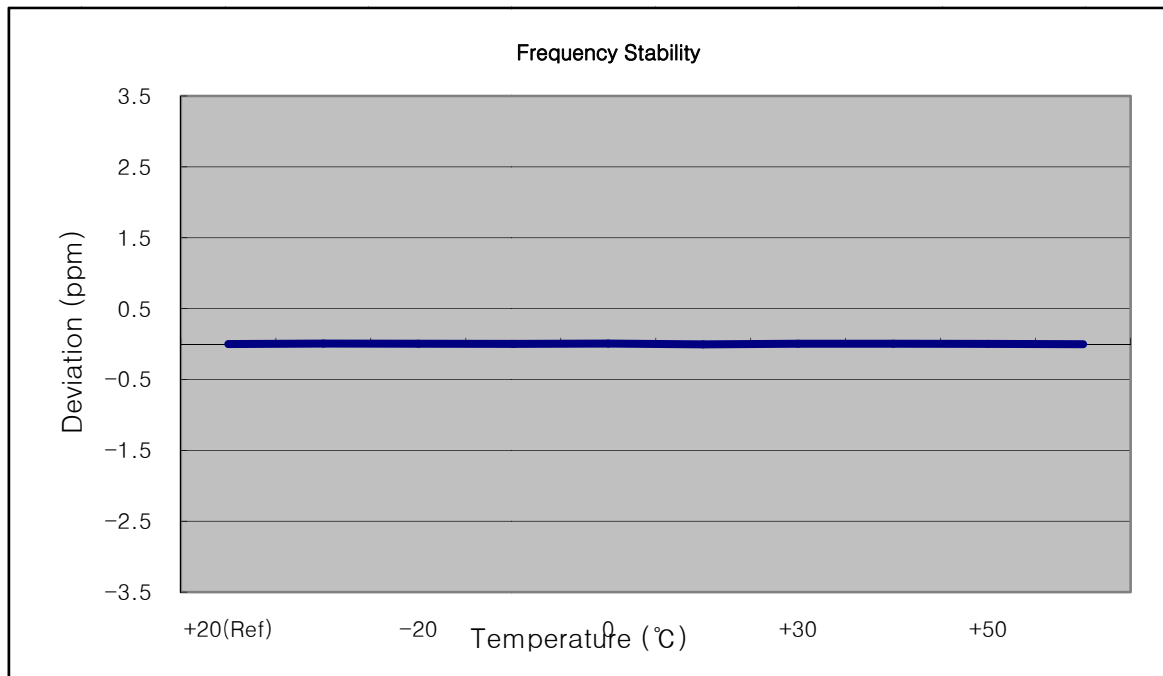

**7.8.6 FREQUENCY STABILITY (10 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (10 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1732 500 006	0	0.000 000	0.000
100%		-30	1732 500 002	-4.50	0.000 000	-0.003
100%		-20	1732 500 012	5.90	0.000 000	0.003
100%		-10	1732 499 999	-7.30	0.000 000	-0.004
100%		0	1732 500 012	6.10	0.000 000	0.004
100%		+10	1732 499 999	-6.70	0.000 000	-0.004
100%		+30	1732 500 002	-4.40	0.000 000	-0.003
100%		+40	1732 500 001	-5.20	0.000 000	-0.003
100%		+50	1732 500 012	6.20	0.000 000	0.004
Batt. Endpoint	10.2	+20	1732 500 010	4.30	0.000 000	0.002

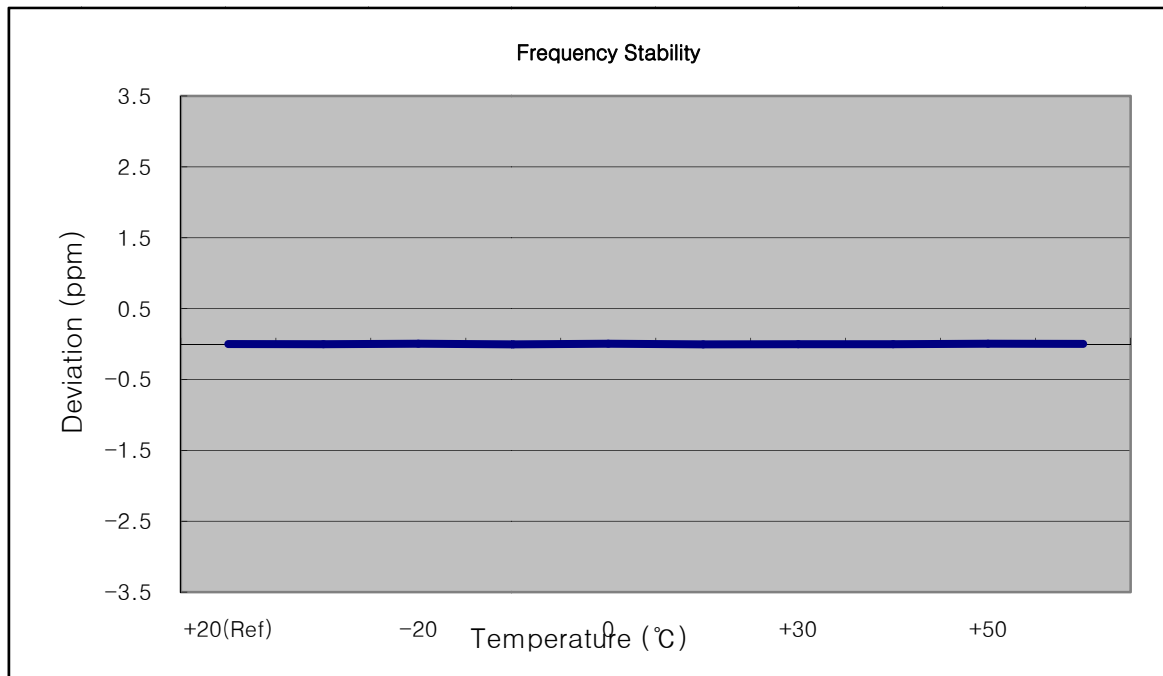

**7.8.7 FREQUENCY STABILITY (15 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (15 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1732 500 008	0	0.000 000	0.000
100%		-30	1732 500 013	4.60	0.000 000	0.003
100%		-20	1732 500 017	9.50	0.000 001	0.005
100%		-10	1732 500 015	7.30	0.000 000	0.004
100%		0	1732 500 001	-6.70	0.000 000	-0.004
100%		+10	1732 500 002	-5.90	0.000 000	-0.003
100%		+30	1732 500 002	-5.70	0.000 000	-0.003
100%		+40	1732 499 998	-10.30	-0.000 001	-0.006
100%		+50	1732 500 017	9.30	0.000 001	0.005
Batt. Endpoint	10.2	+20	1732 500 015	6.90	0.000 000	0.004

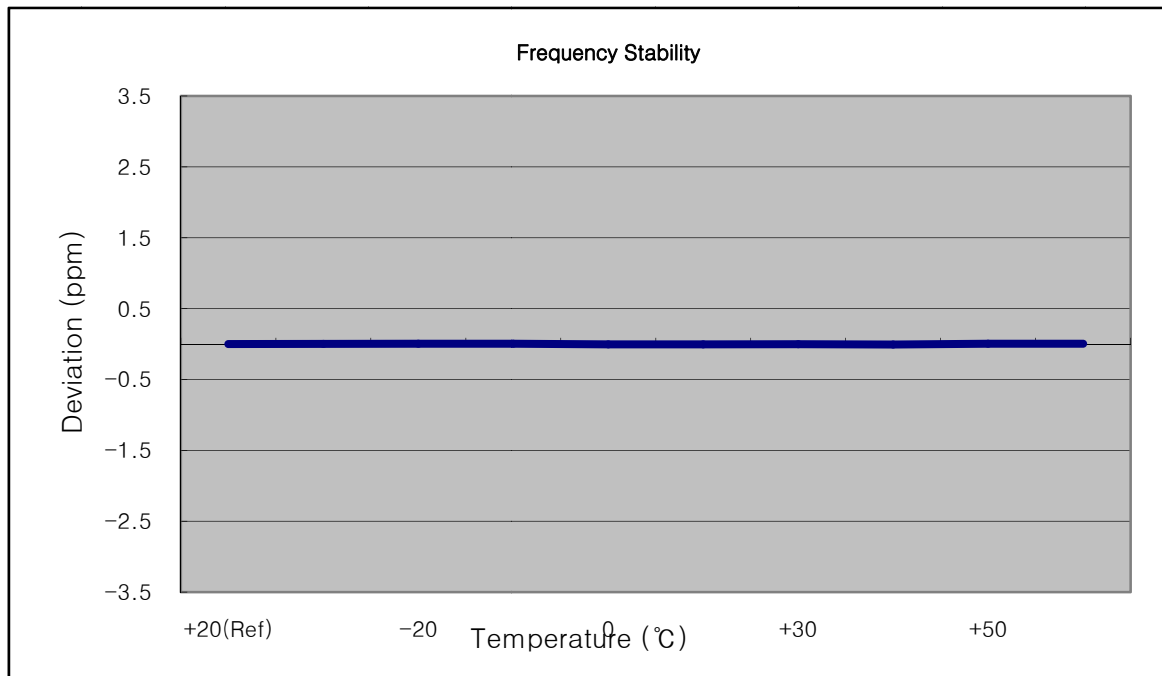

**7.8.8 FREQUENCY STABILITY (20 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (20 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1732 499 993	0	0.000 000	0.000
100%		-30	1732 499 998	5.40	0.000 000	0.003
100%		-20	1732 499 998	5.70	0.000 000	0.003
100%		-10	1732 499 999	6.20	0.000 000	0.004
100%		0	1732 500 001	8.40	0.000 000	0.005
100%		+10	1732 500 001	7.90	0.000 000	0.005
100%		+30	1732 499 988	-4.40	0.000 000	-0.003
100%		+40	1732 500 001	8.20	0.000 000	0.005
100%		+50	1732 500 000	6.90	0.000 000	0.004
Batt. Endpoint	10.2	+20	1732 499 987	-5.80	0.000 000	-0.003

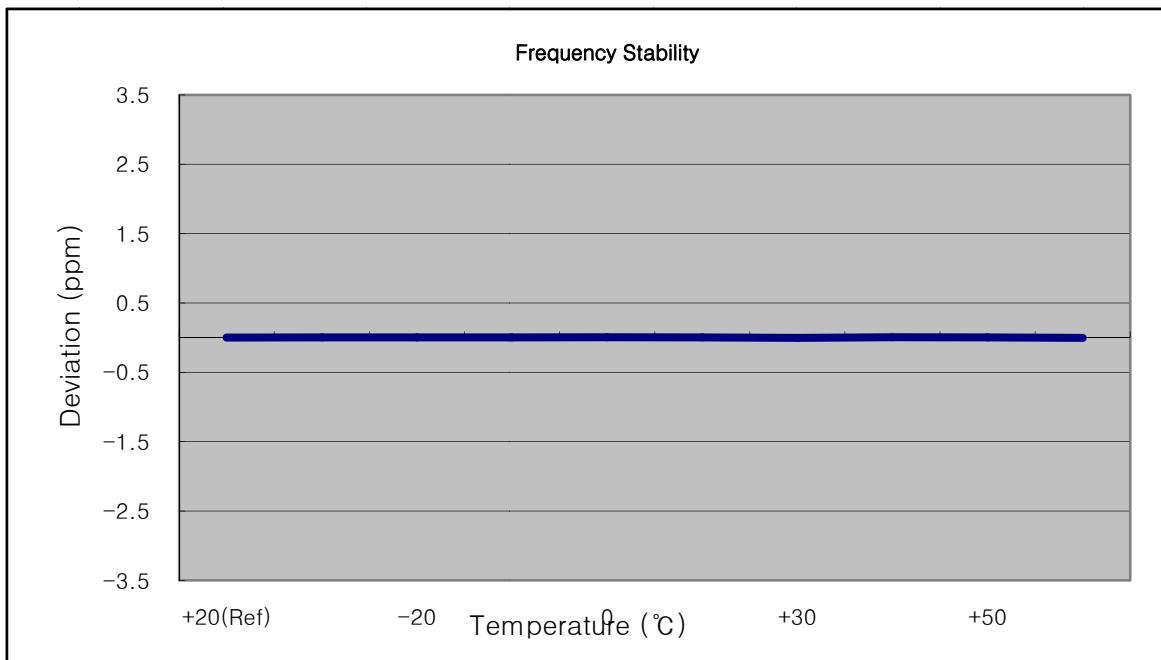

## **8. TEST PLOTS**

**BAND 17. Occupied Bandwidth Plot (5M BW Ch.23790 QPSK RB 25)**



**BAND 17. Occupied Bandwidth Plot (5M BW Ch.23790 16QAM RB 25)**




BAND 17. Occupied Bandwidth Plot (10M BW Ch.23790 QPSK RB 50)




BAND 17. Occupied Bandwidth Plot (10M BW Ch.23790 16QAMRB 50)




BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 QPSK RB 6)

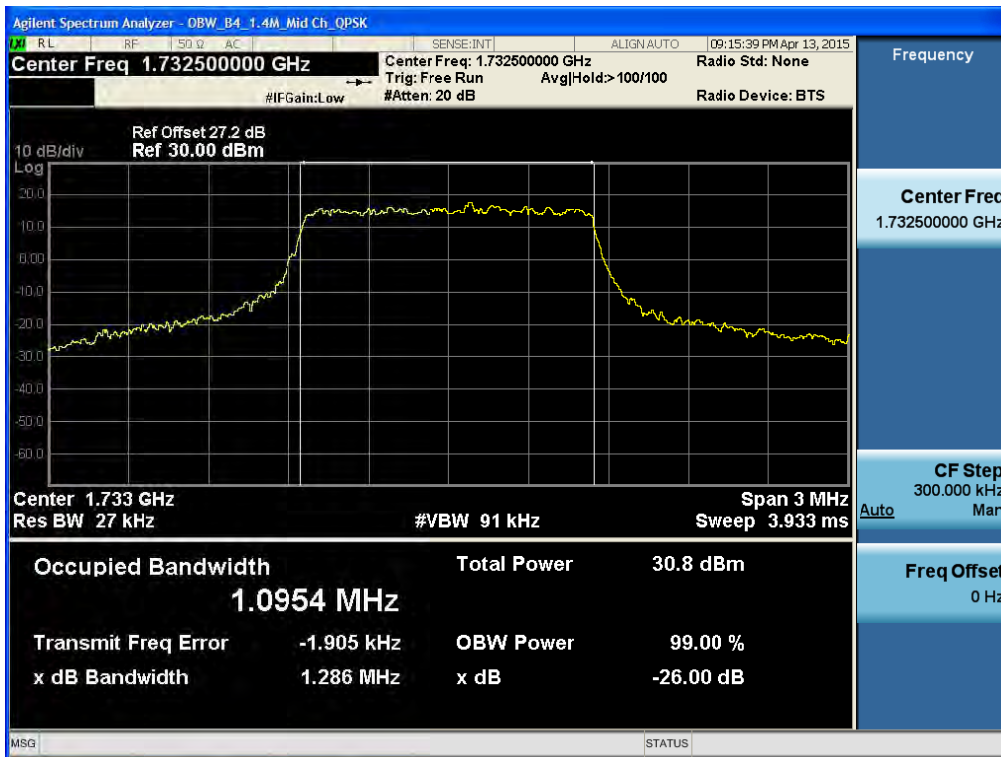


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 16QAM RB 6)

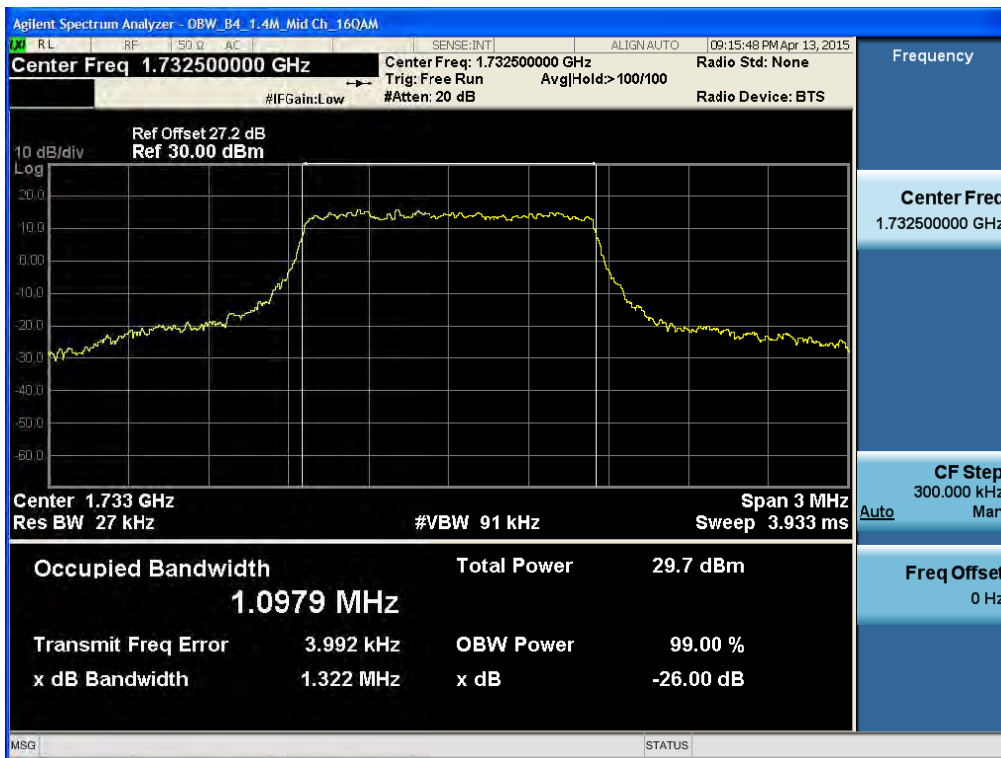

BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 QPSK RB 15)

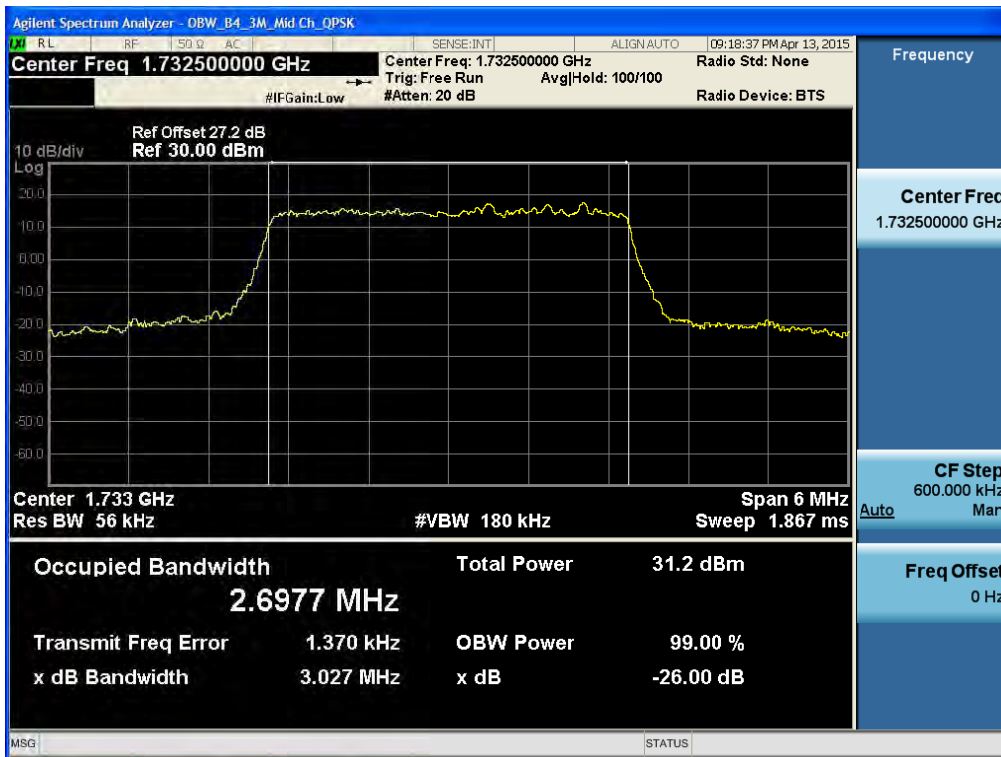


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 16QAM RB 15)

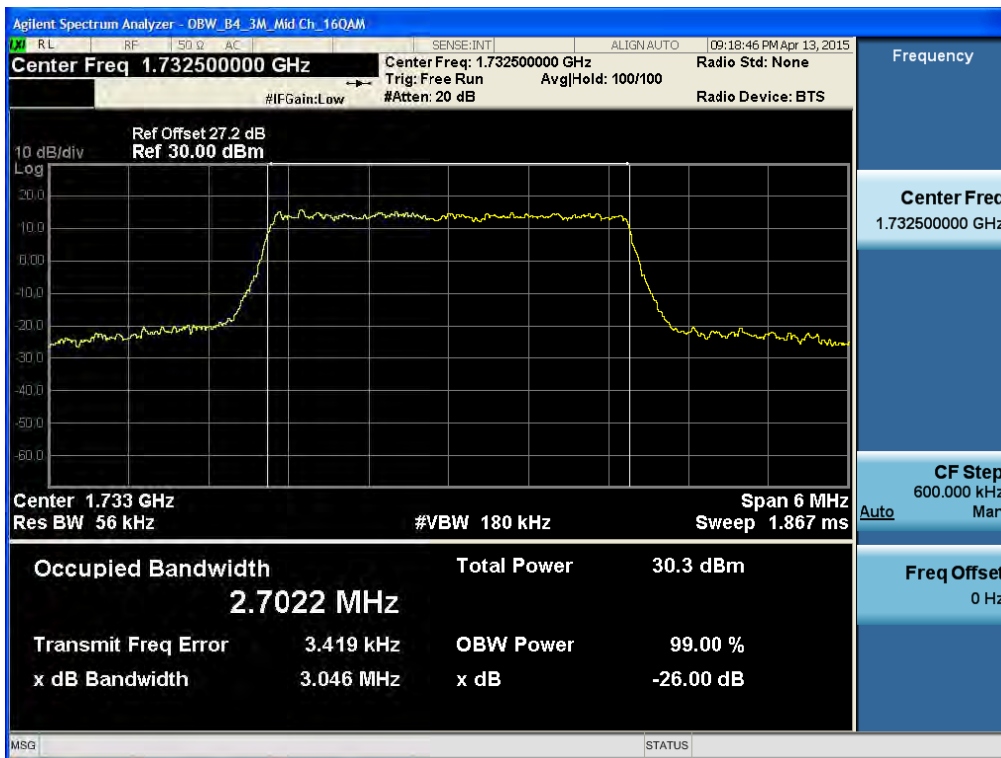


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 QPSK RB 25)




BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 16QAM RB 25)

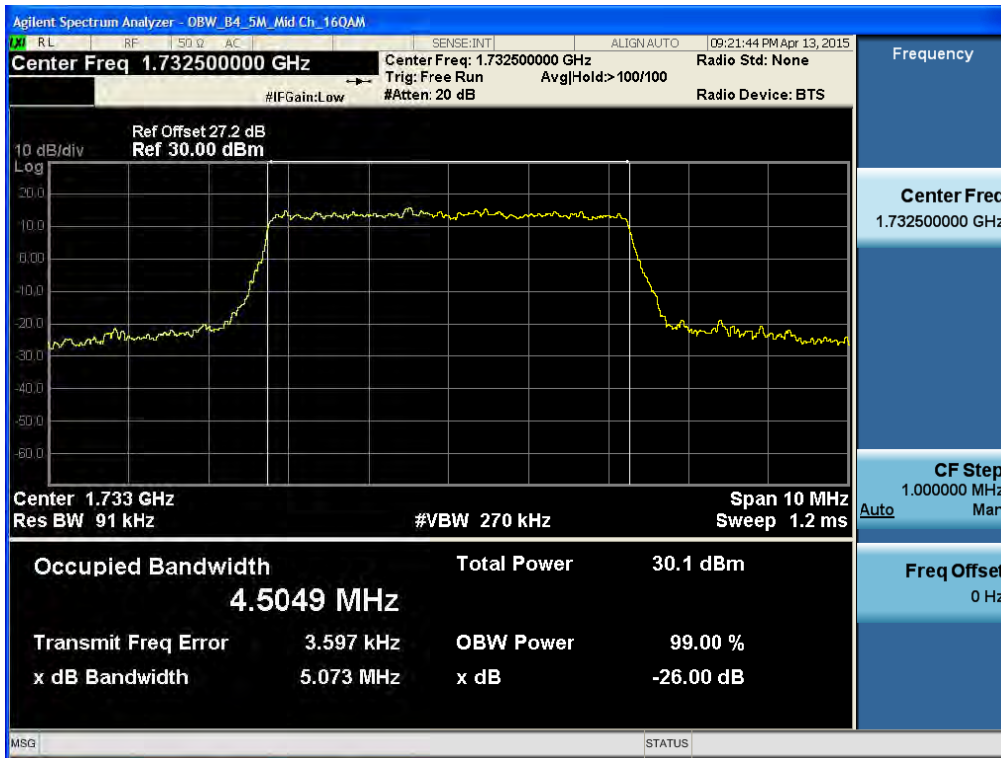


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 QPSK RB 50)

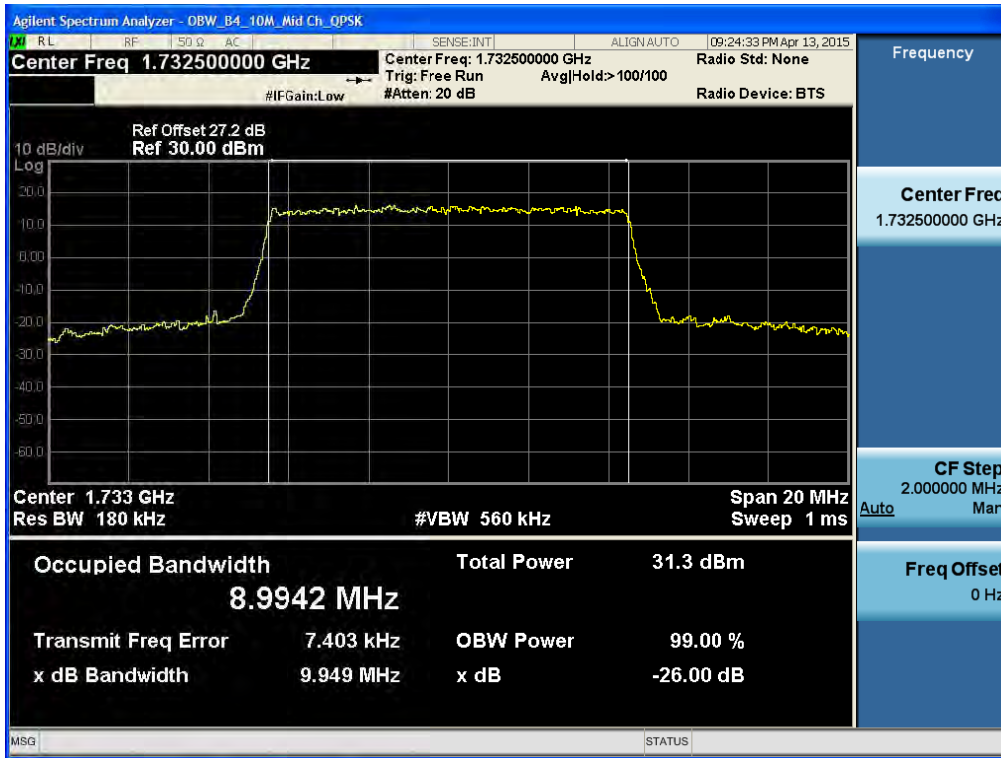


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 16QAM RB 50)

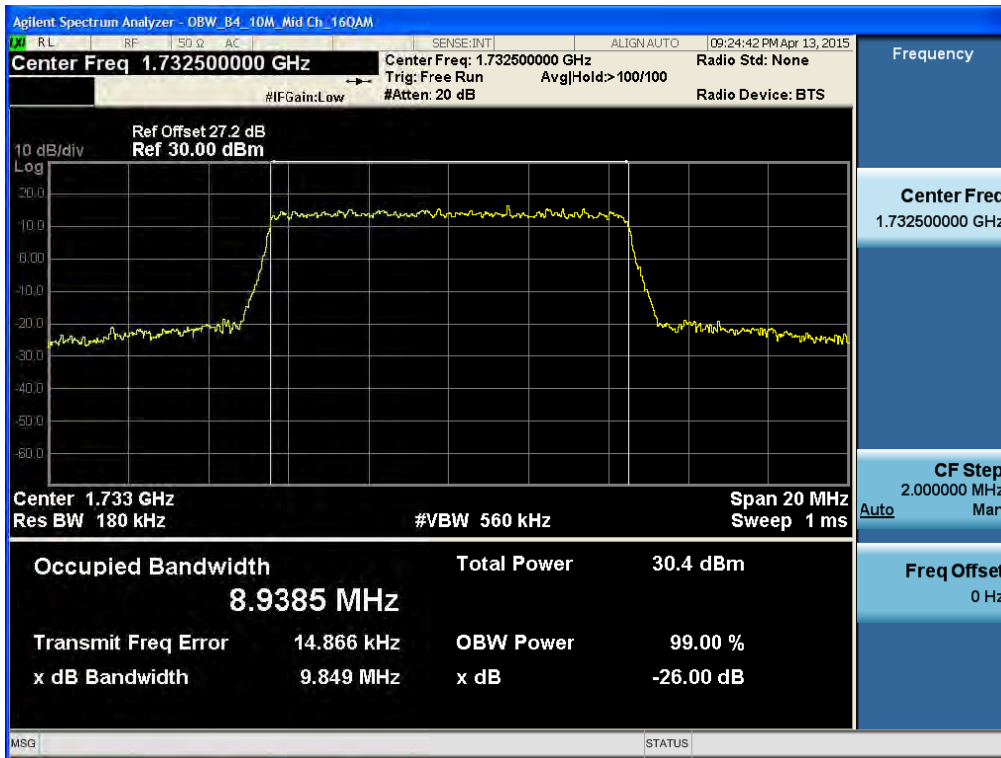


**BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 QPSK RB 75)**

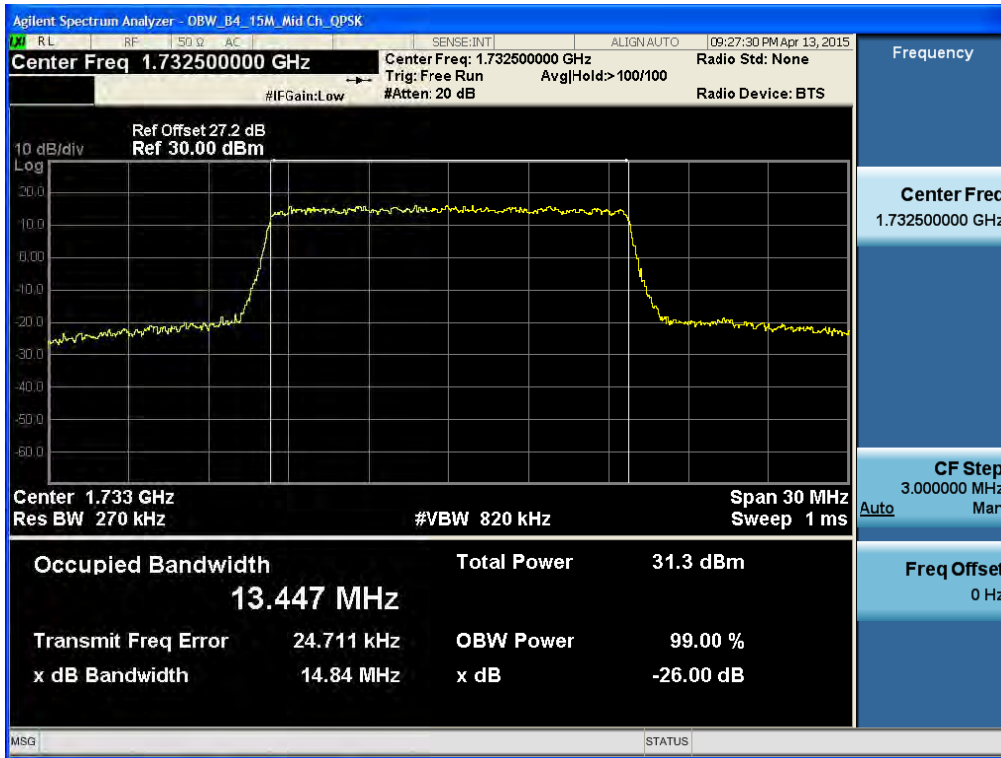


**BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 16QAM RB 75)**

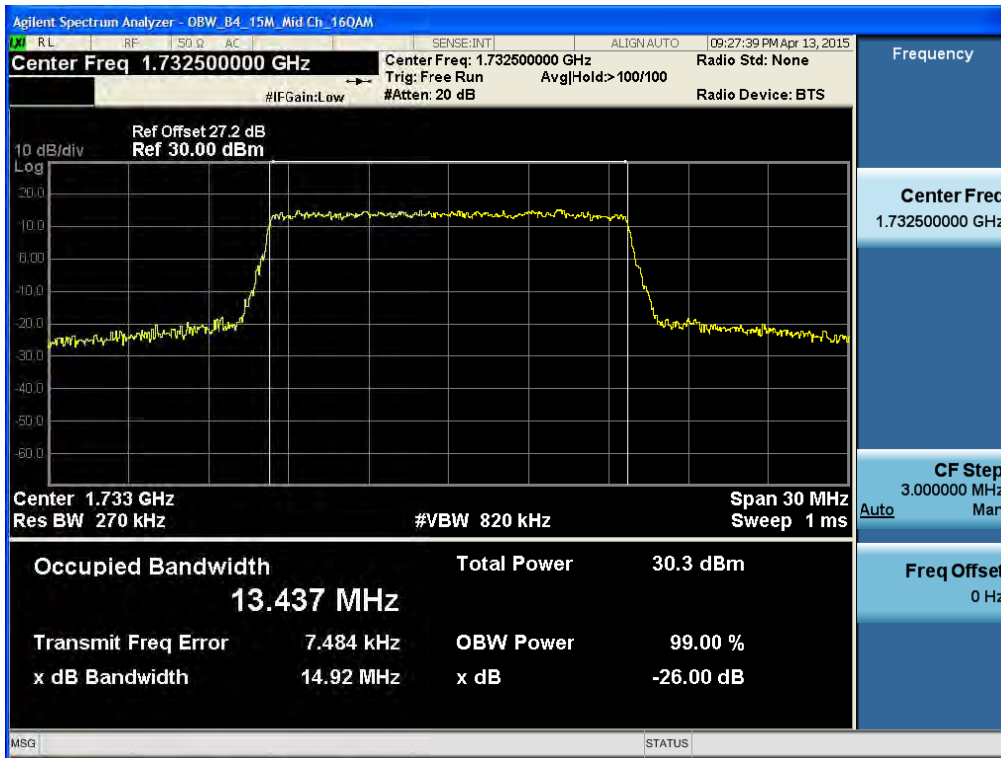


**BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 QPSK RB 100)**

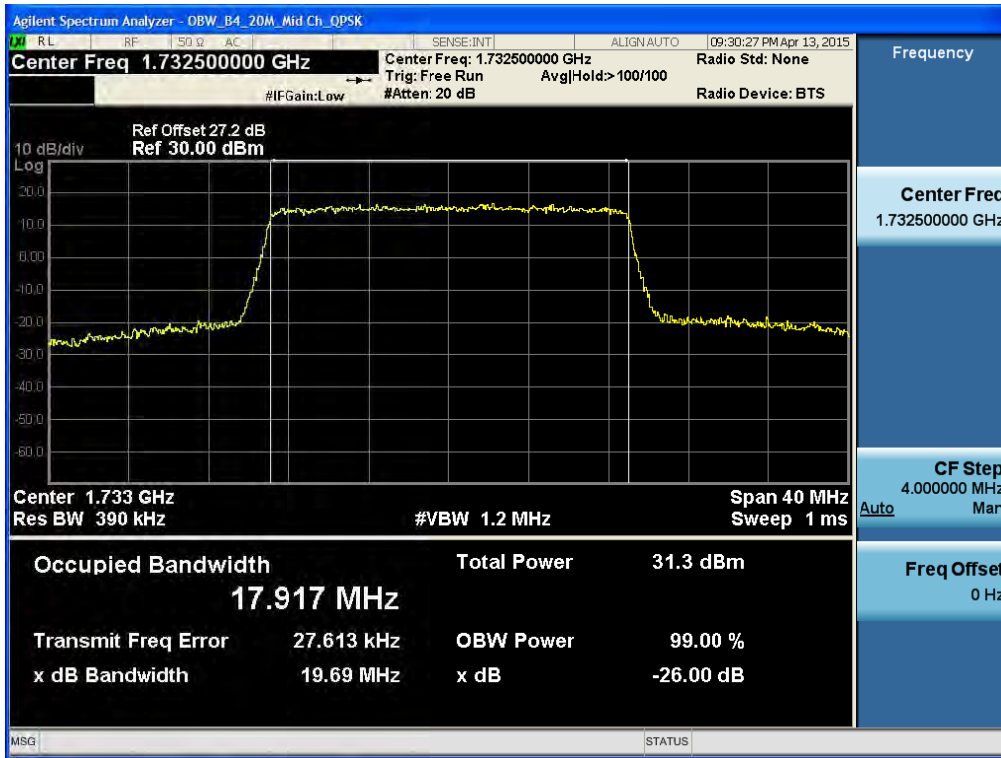


**BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 16QAM RB 100)**

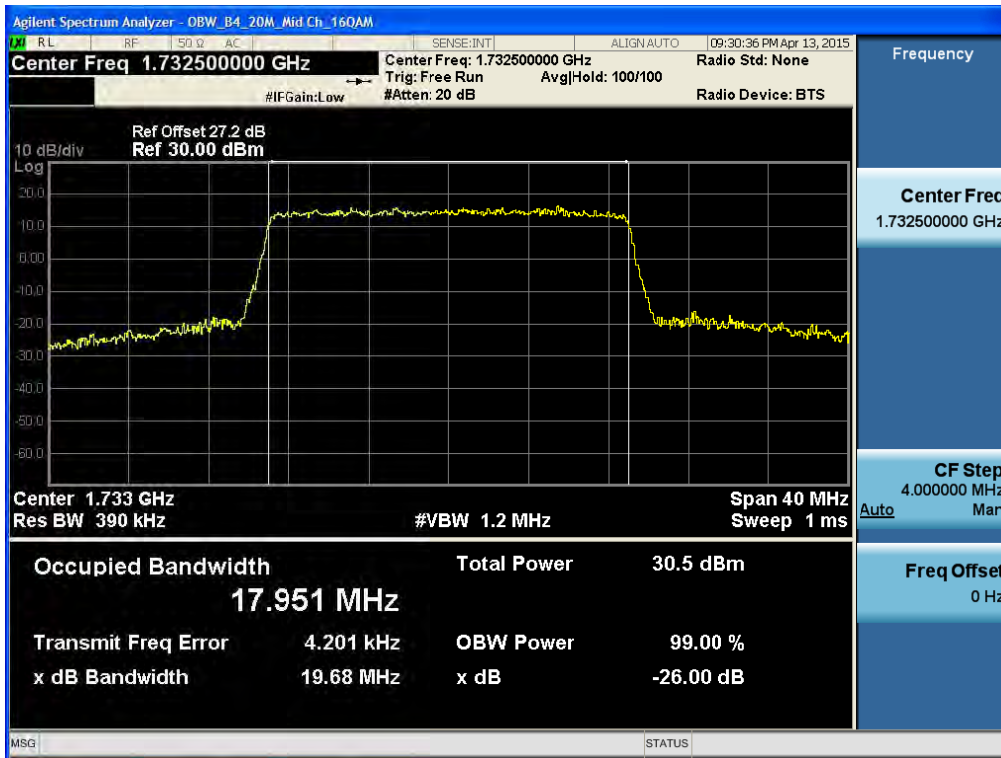


BAND 4. PAR Plot (1.4M BW\_Ch.20175\_QPSK\_RB6\_0)

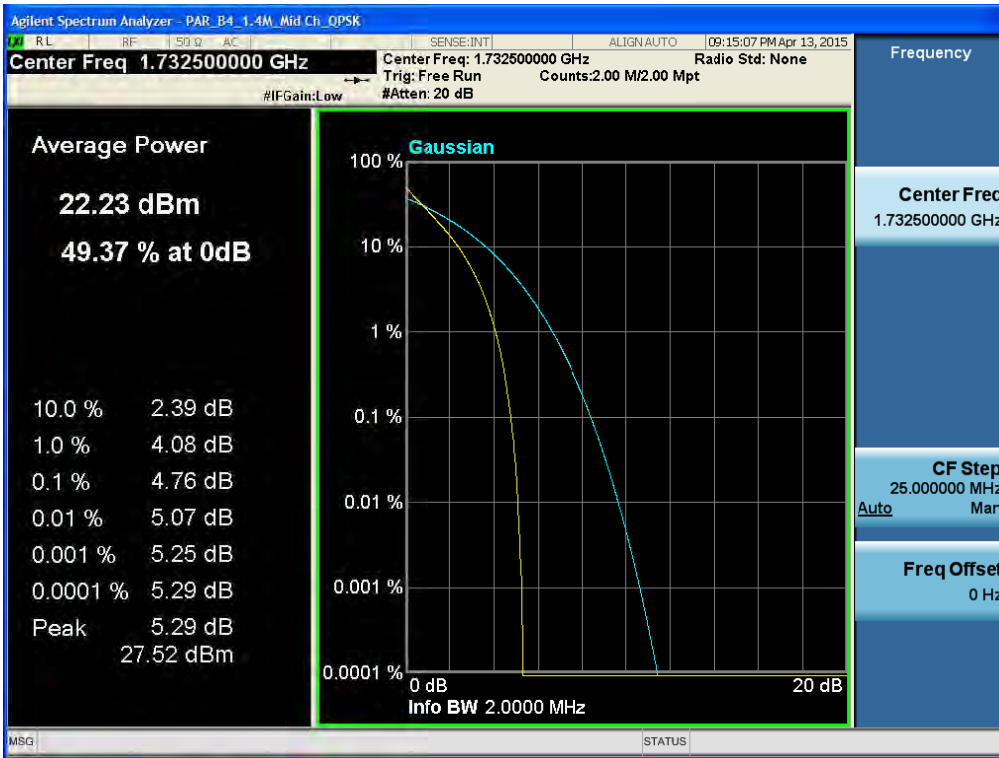


BAND 4. PAR Plot (1.4M BW\_Ch.20175\_16QAM\_RB6\_0)

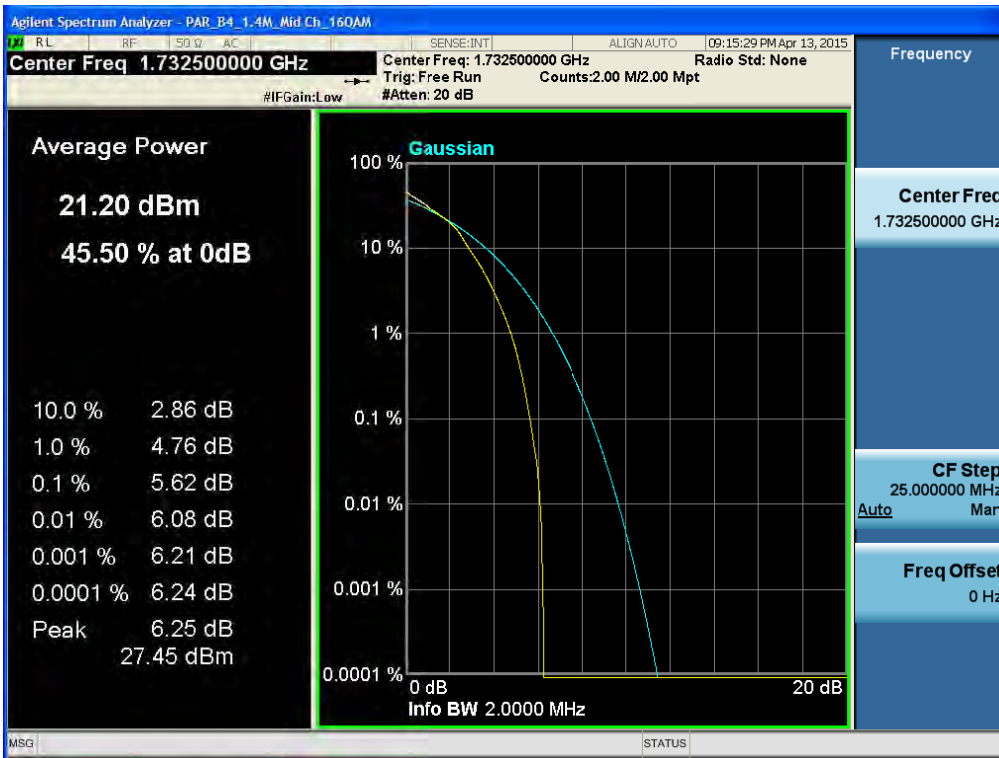


BAND 4. PAR Plot (3M BW\_Ch.20175\_QPSK\_RB15\_0)

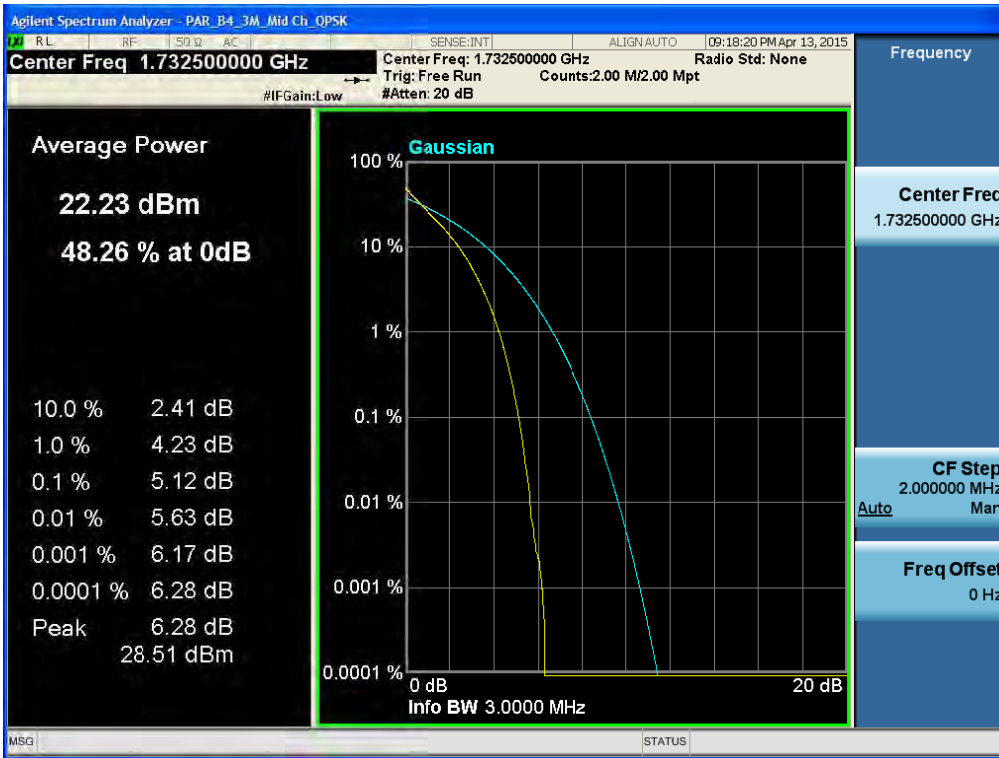


BAND 4. PAR Plot (3M BW\_Ch.20175\_16QAM\_RB15\_0)

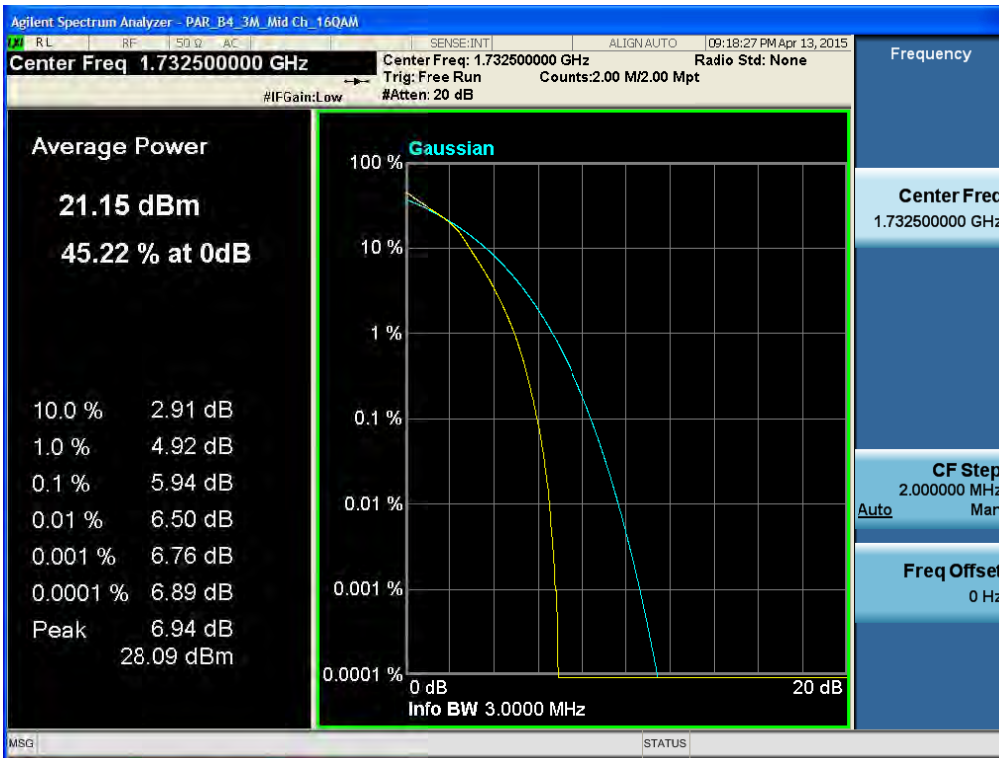


BAND 4. PAR Plot (5M BW\_Ch.20175\_QPSK\_RB25\_0)

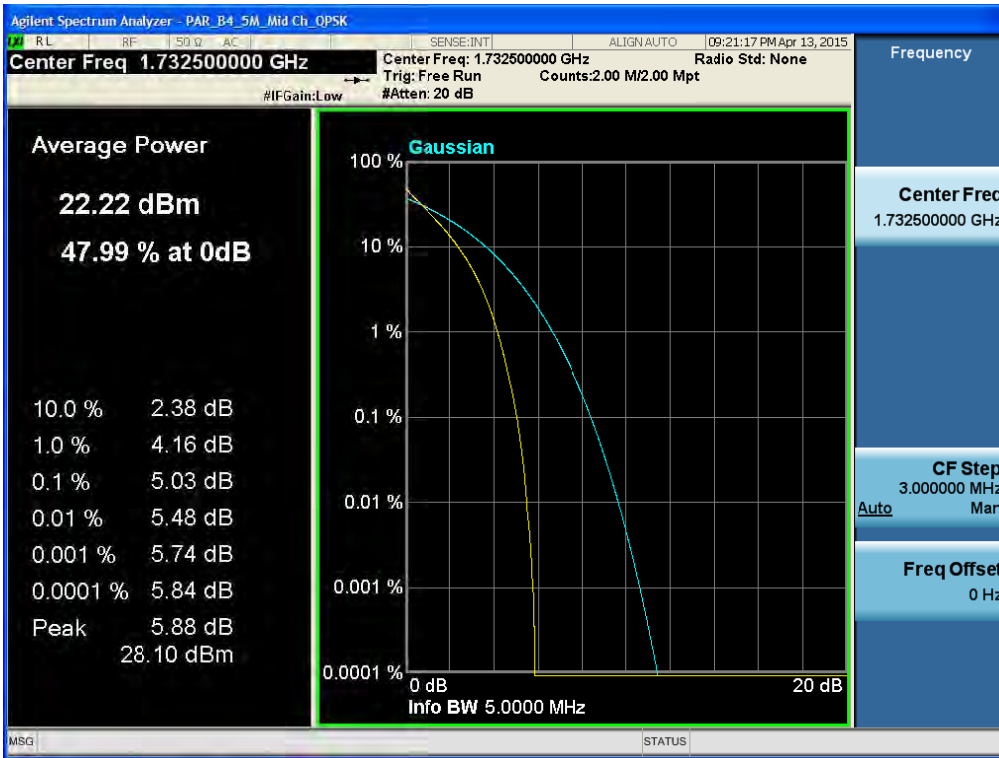


BAND 4. PAR Plot (5M BW\_Ch.20175\_16QAM\_RB25\_0)

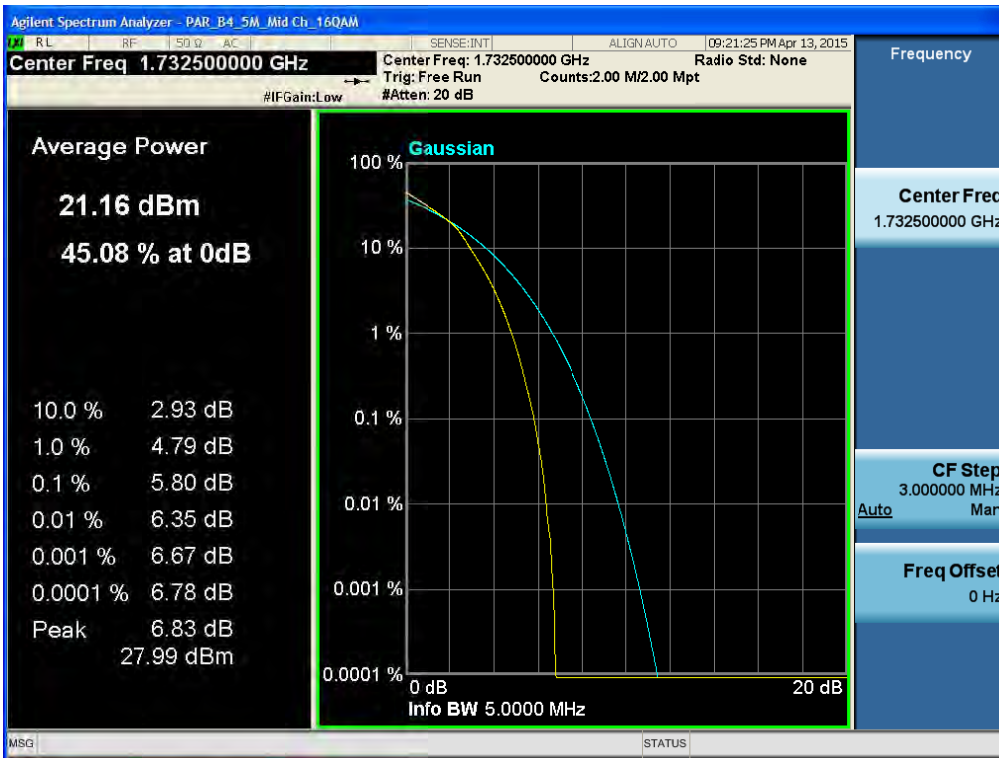


BAND 4. PAR Plot (10M BW\_Ch.20175\_QPSK\_RB50\_0)

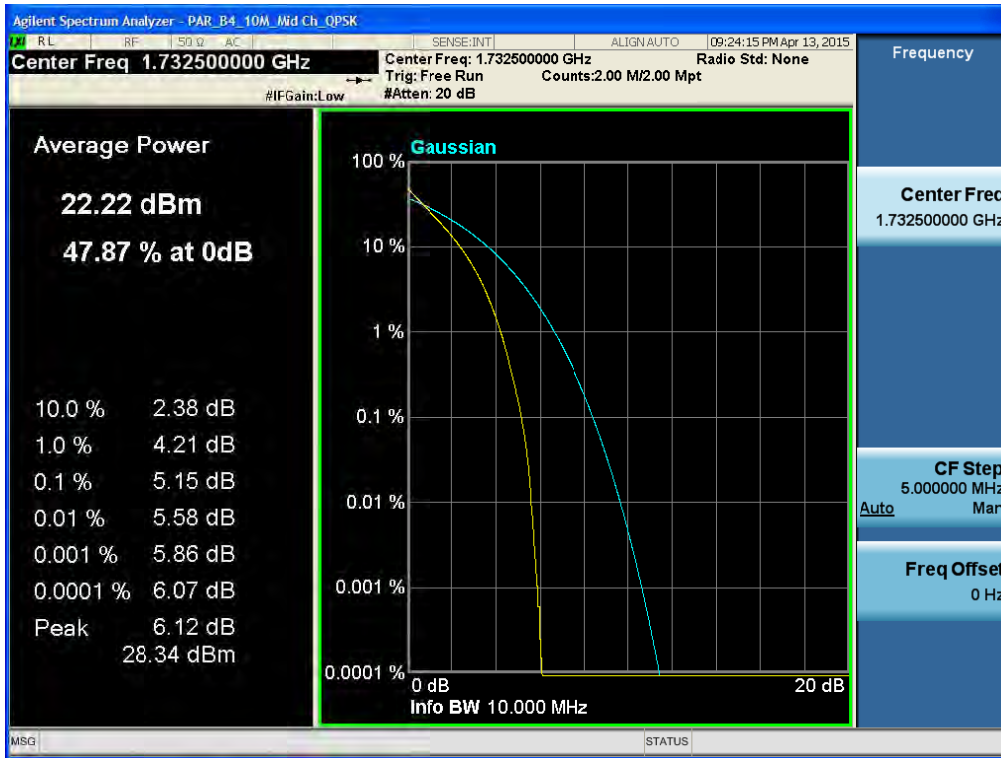


BAND 4. PAR Plot (10M BW\_Ch.20175\_16QAM\_RB50\_0)

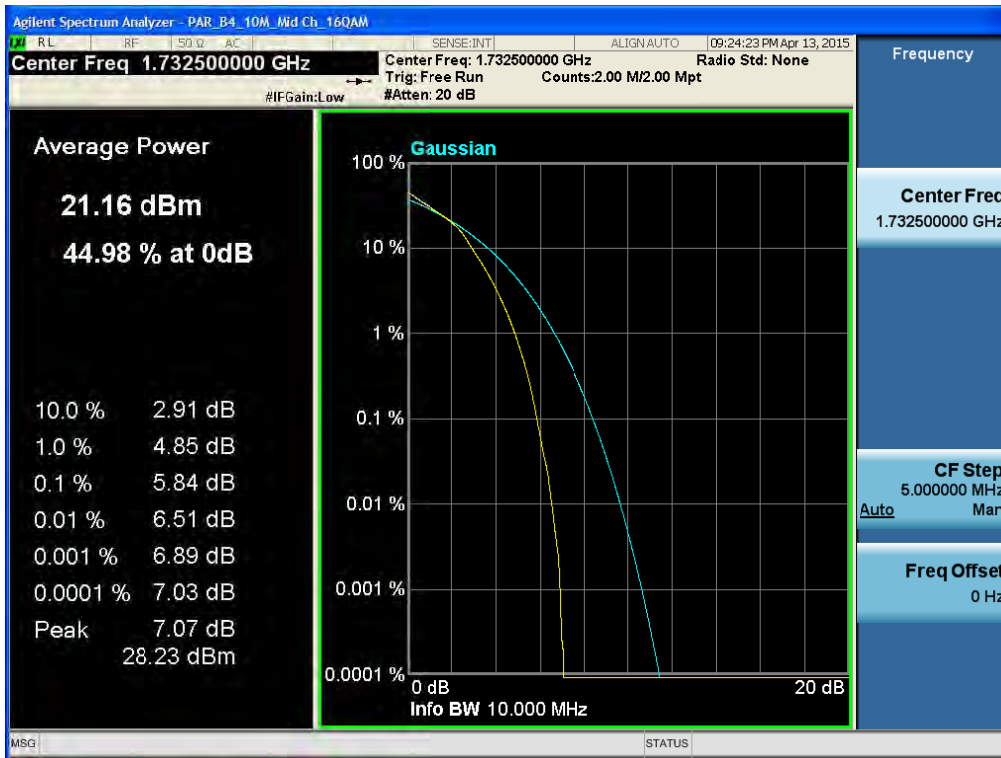


BAND 4. PAR Plot (15M BW\_Ch.20175\_QPSK\_RB75\_0)

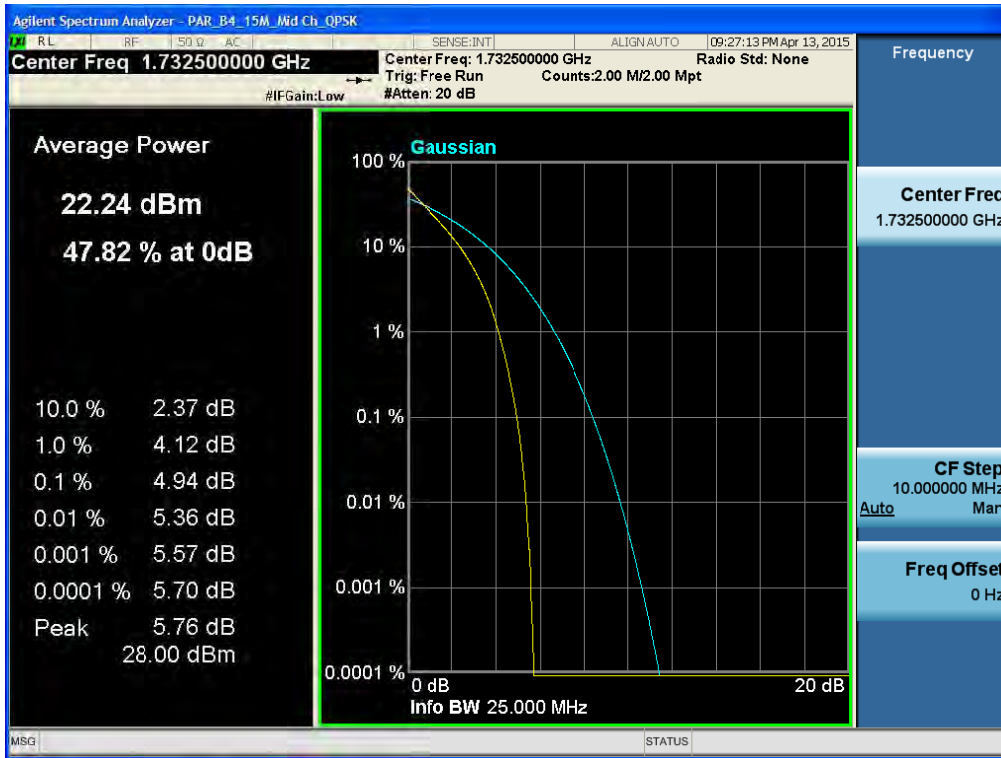


BAND 4. PAR Plot (15M BW\_Ch.20175\_16QAM\_RB75\_0)

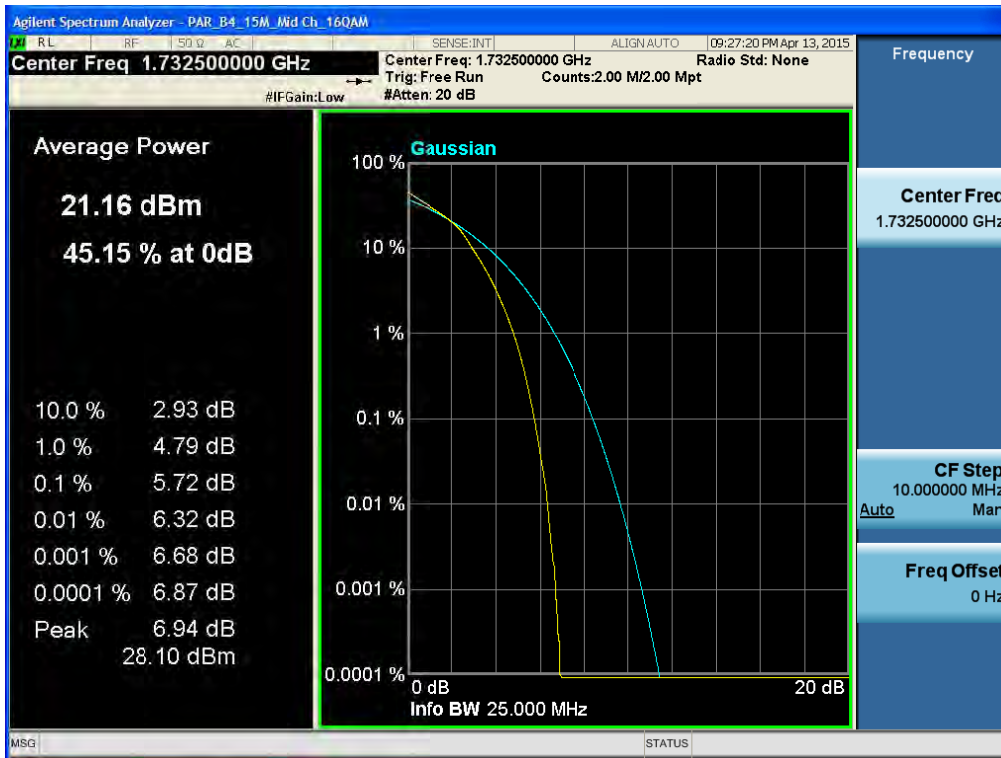


BAND 4. PAR Plot (20M BW\_Ch.20175\_QPSK\_RB100\_0)

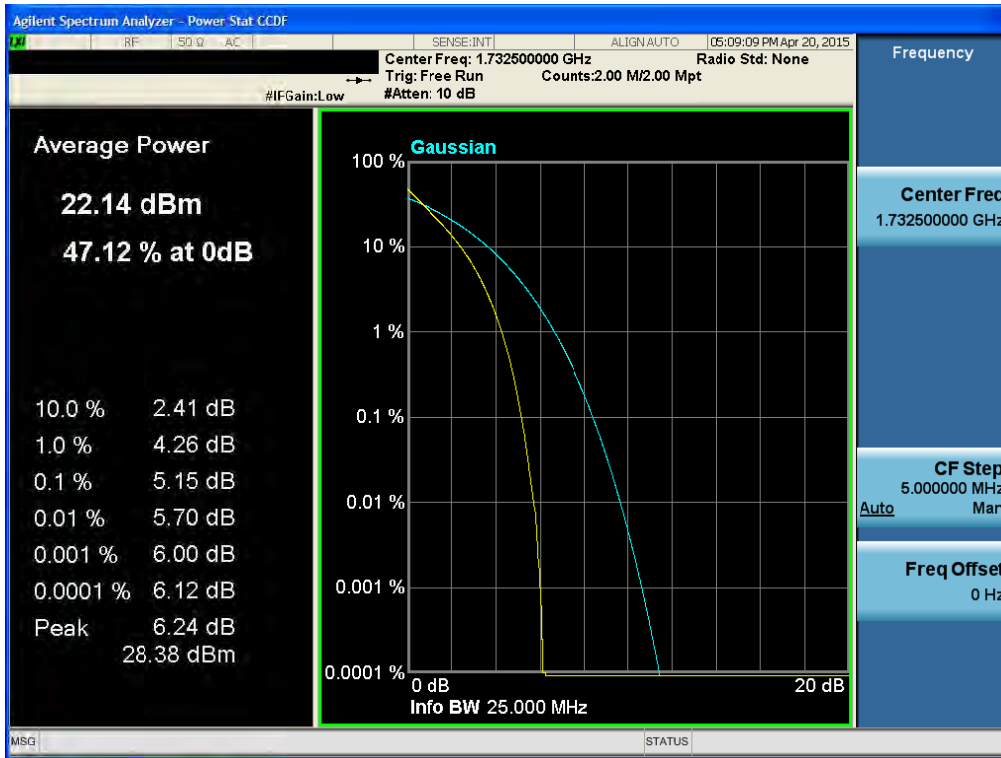


BAND 4. PAR Plot (20M BW\_Ch.20175\_16QAM\_RB100\_0)

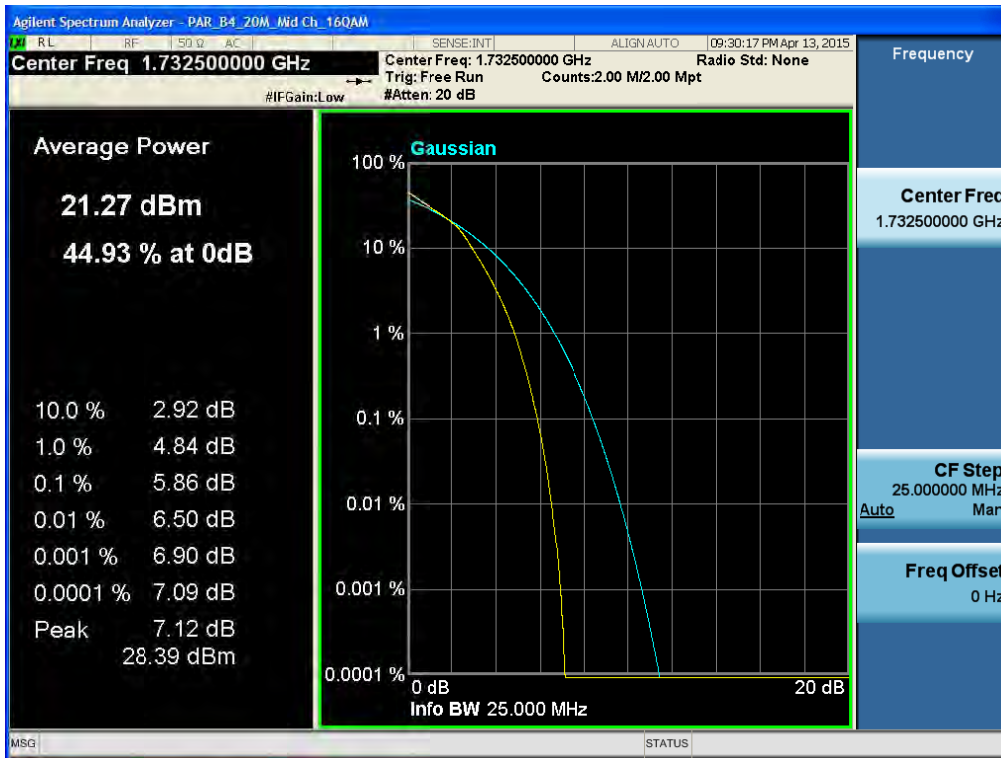


Band 17 Lower Band Edge Plot (5M BW Ch.23755 QPSK\_RB1 OFFSET0)

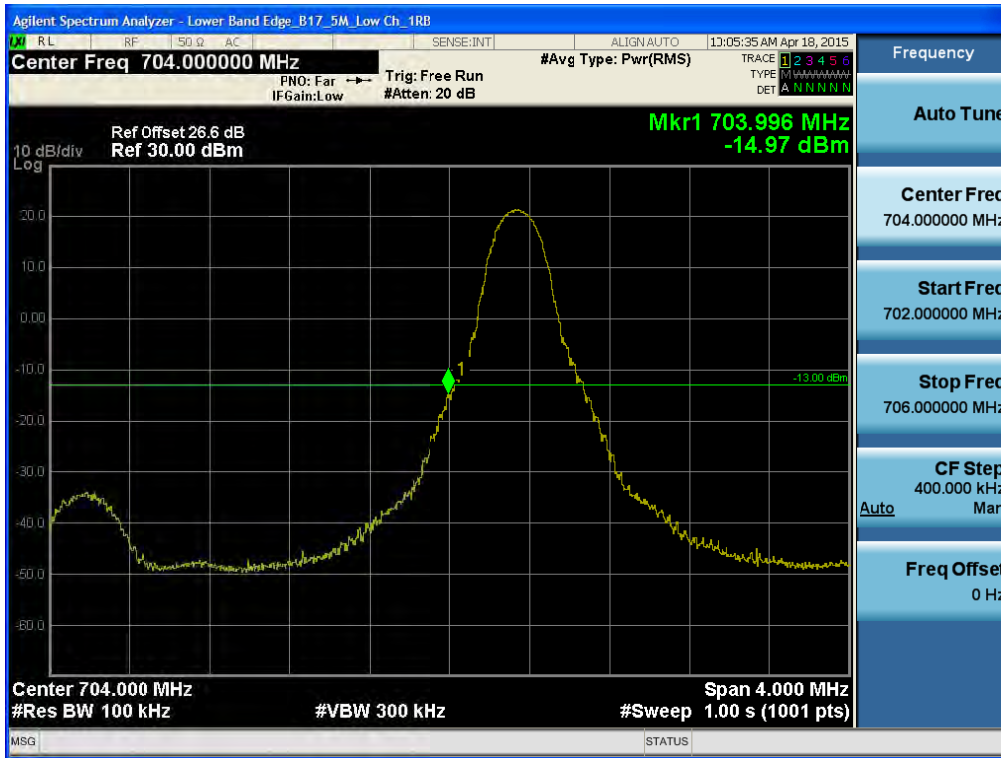


Band 17 Lower Band Edge Plot (5M BW Ch.23755 QPSK\_RB25)

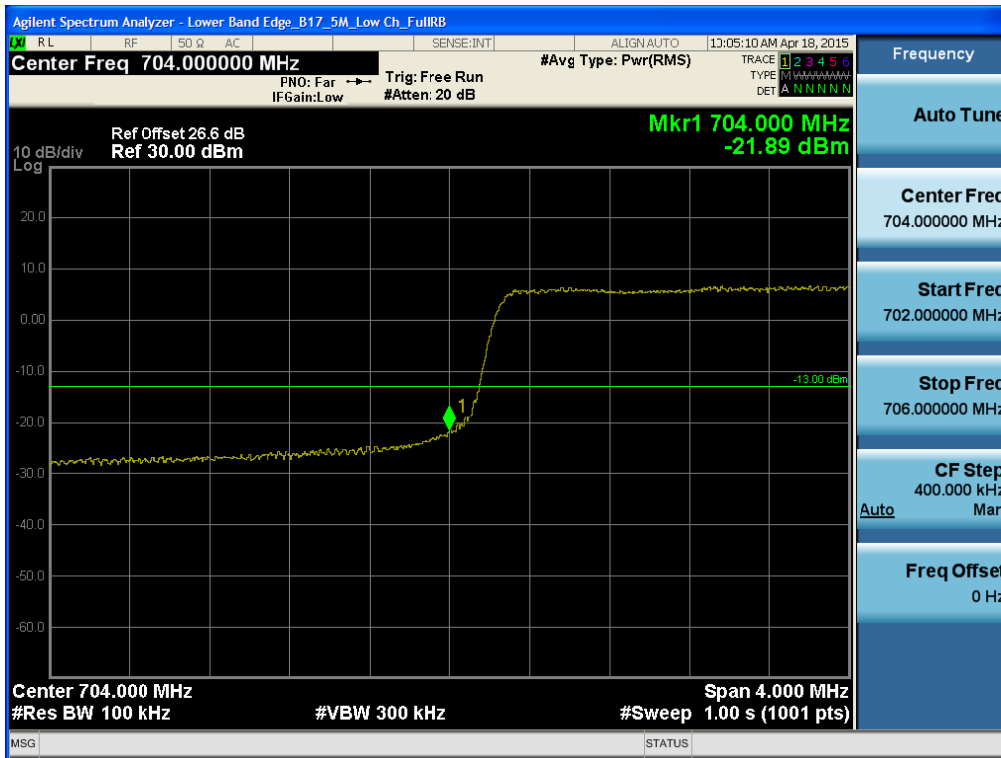


Band 17 Lower Extended Band Edge Plot (5M BW Ch.23755 QPSK\_RB25\_0)

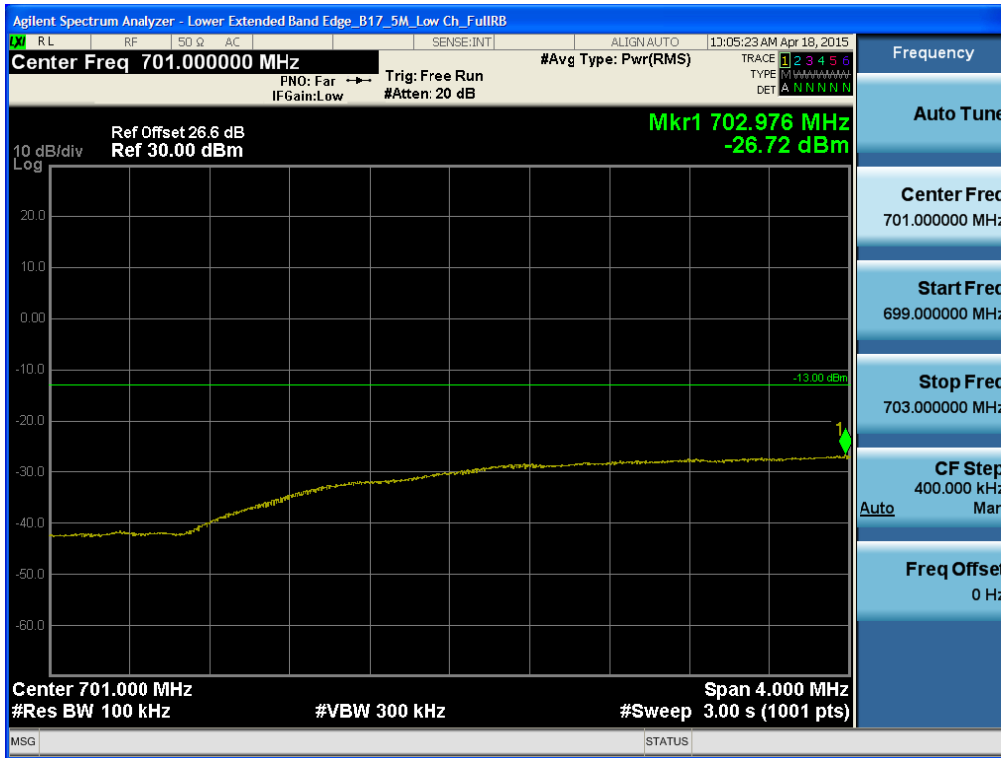


Band 17 Lower Band Edge Plot (10M BW Ch.23780 QPSK\_RB1\_49)

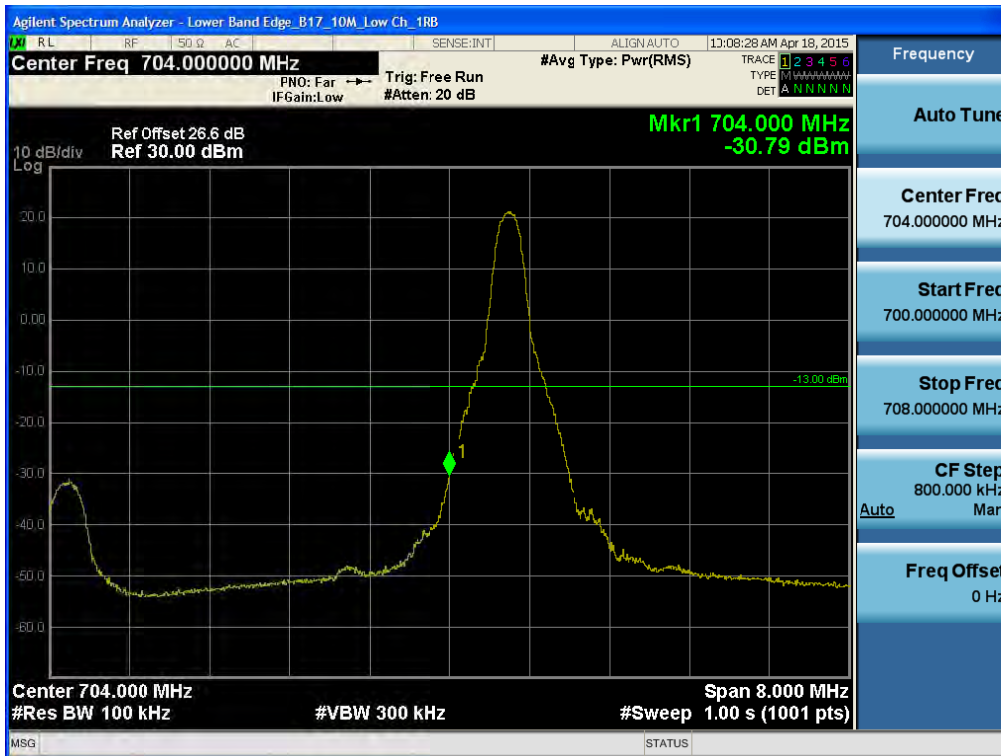


Band 17 Lower Band Edge Plot (10M BW Ch.23780 QPSK\_RB50\_0)

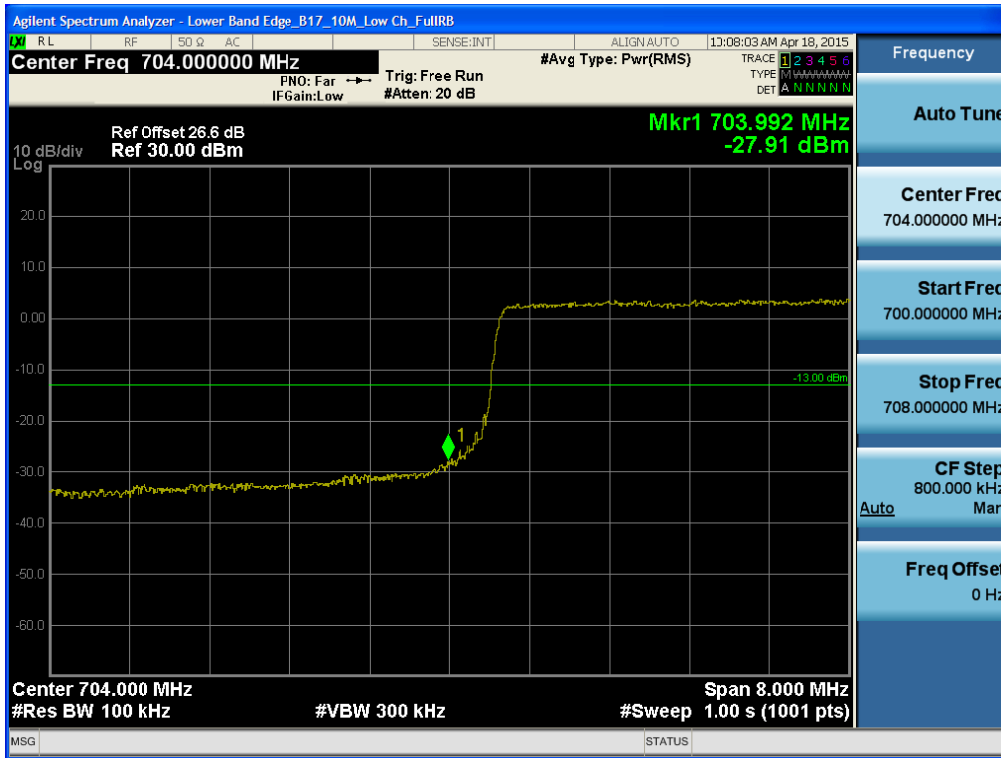


Band 17 Lower Extended Band Edge Plot (10M BW Ch.23780 QPSK\_RB50\_0)

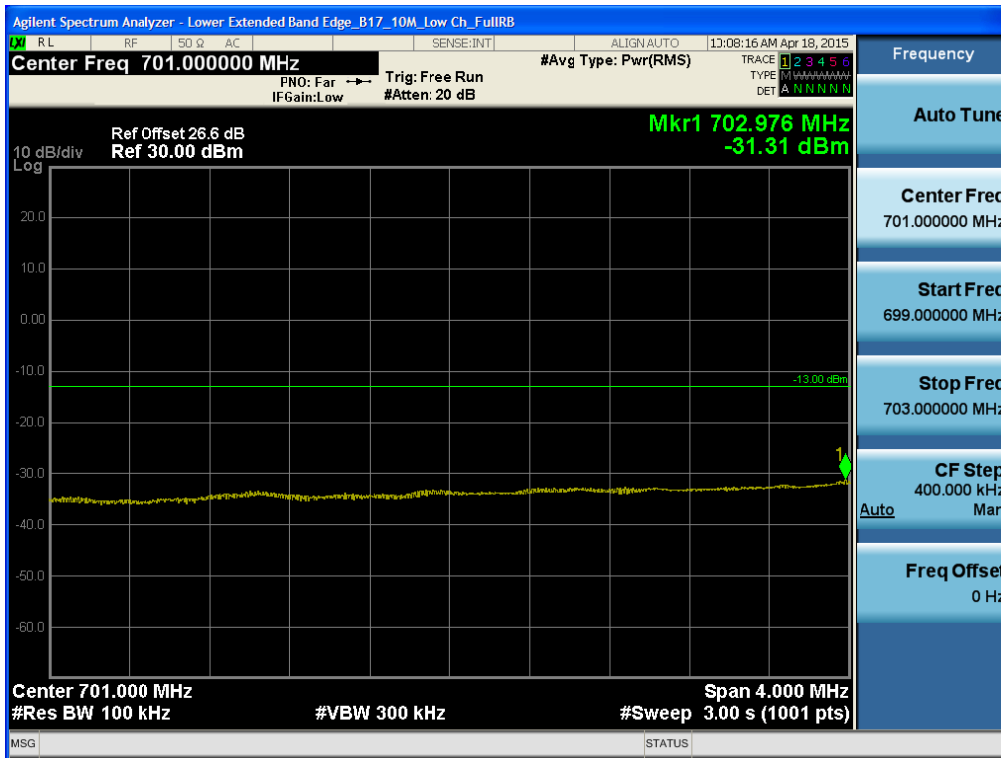


Band 17 Upper Band Edge Plot (5M BW Ch.23825 QPSK\_RB1\_Offset 24)

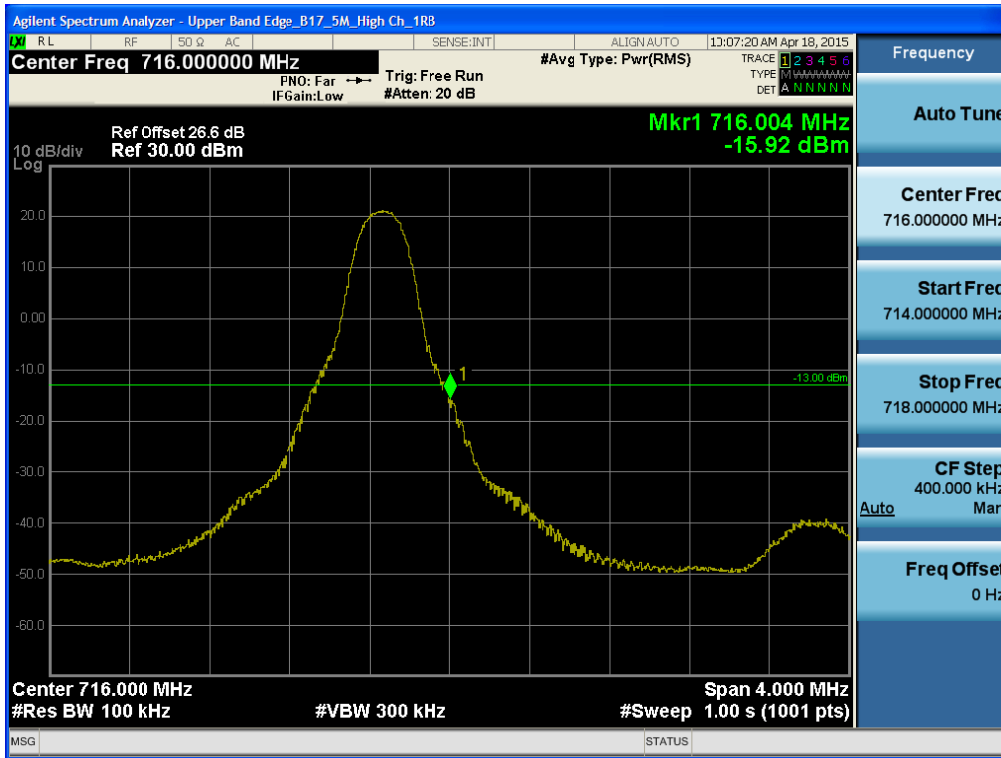


Band 17 Upper Band Edge Plot (5M BW Ch.23825 QPSK\_RB25)

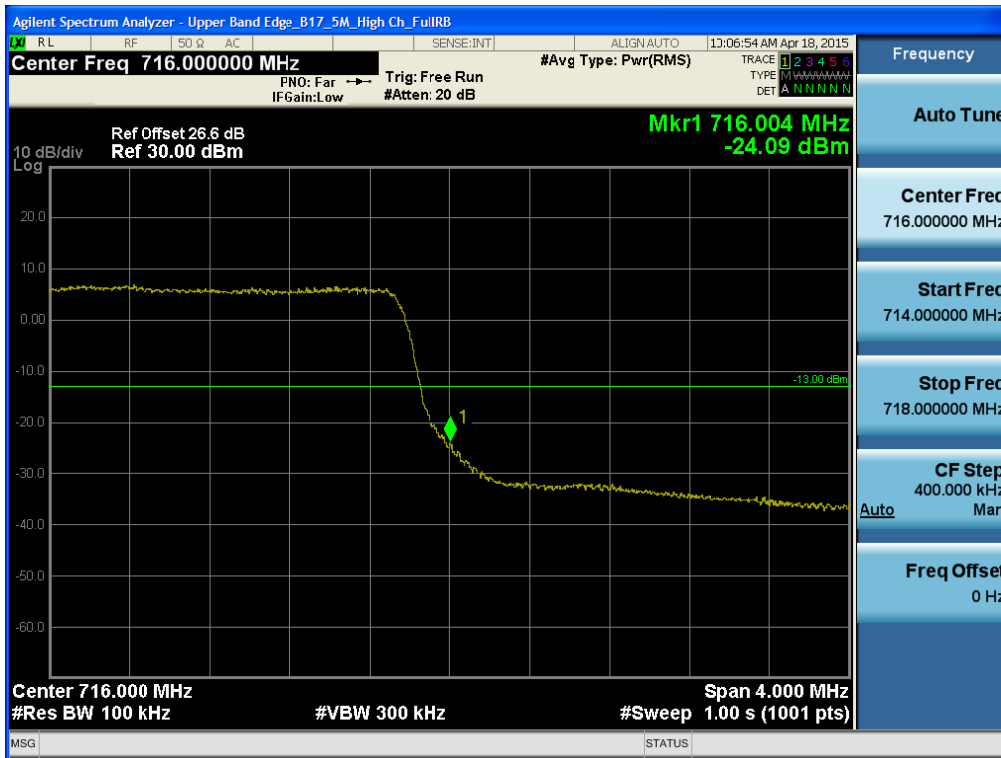


Band 17 Upper Extended Band Edge Plot (5M BW Ch.23825 QPSK\_RB25\_0)

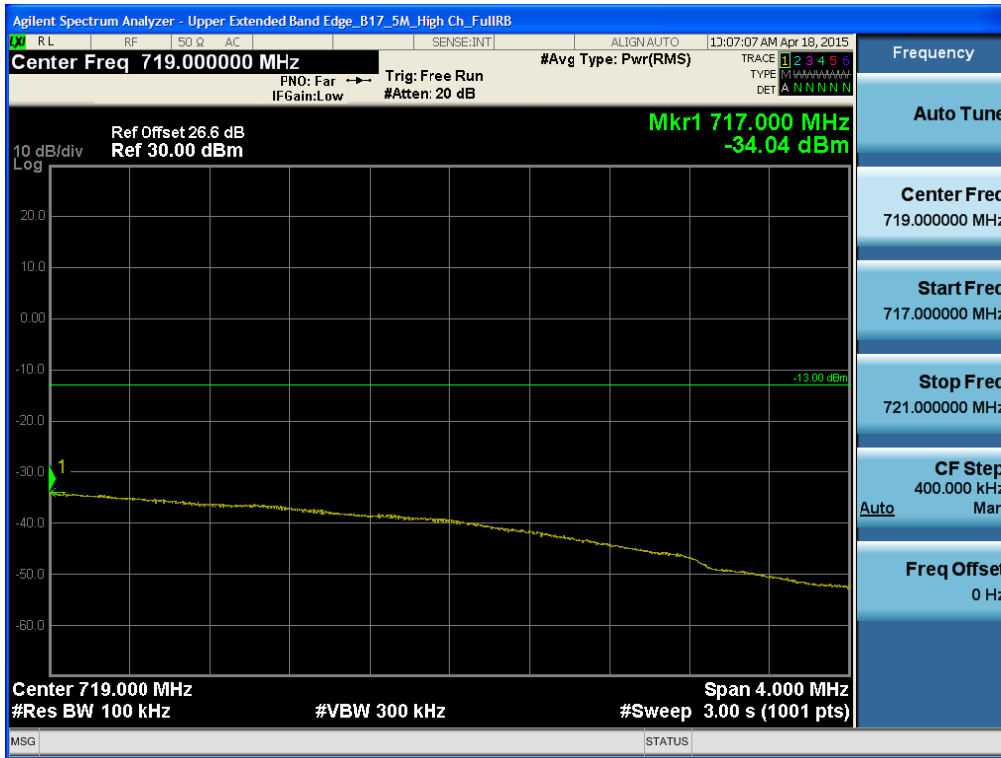


Band 17 Upper Band Edge Plot (10M BW Ch.23800 QPSK\_RB1\_Offset 49)

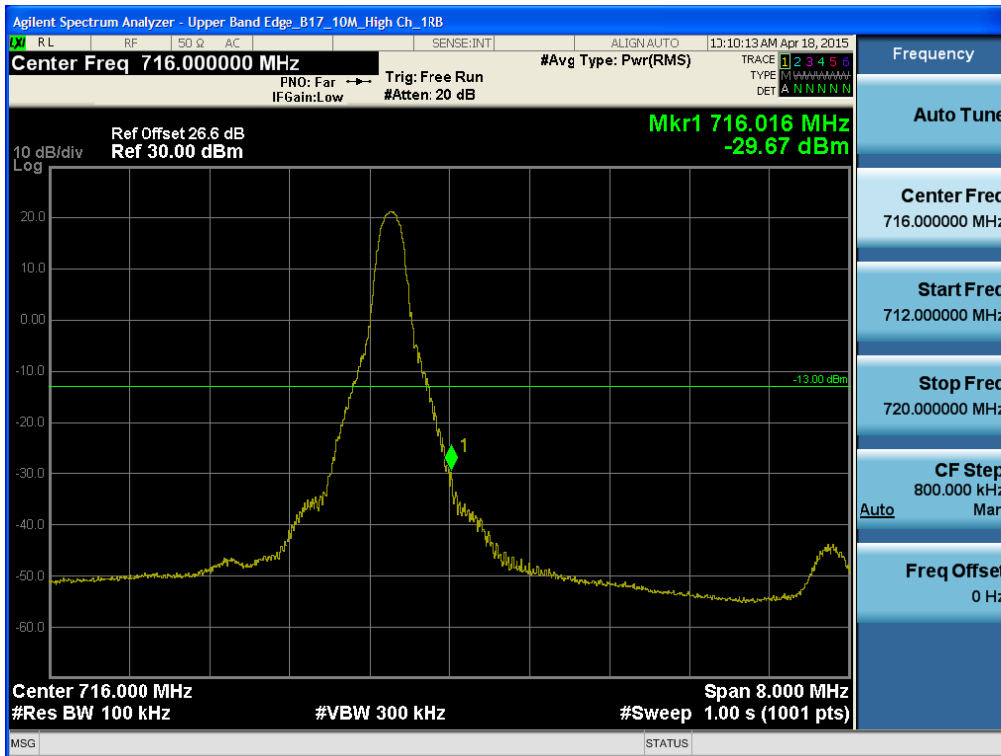


Band 17 Upper Band Edge Plot (10M BW Ch.23800 QPSK\_RB50)

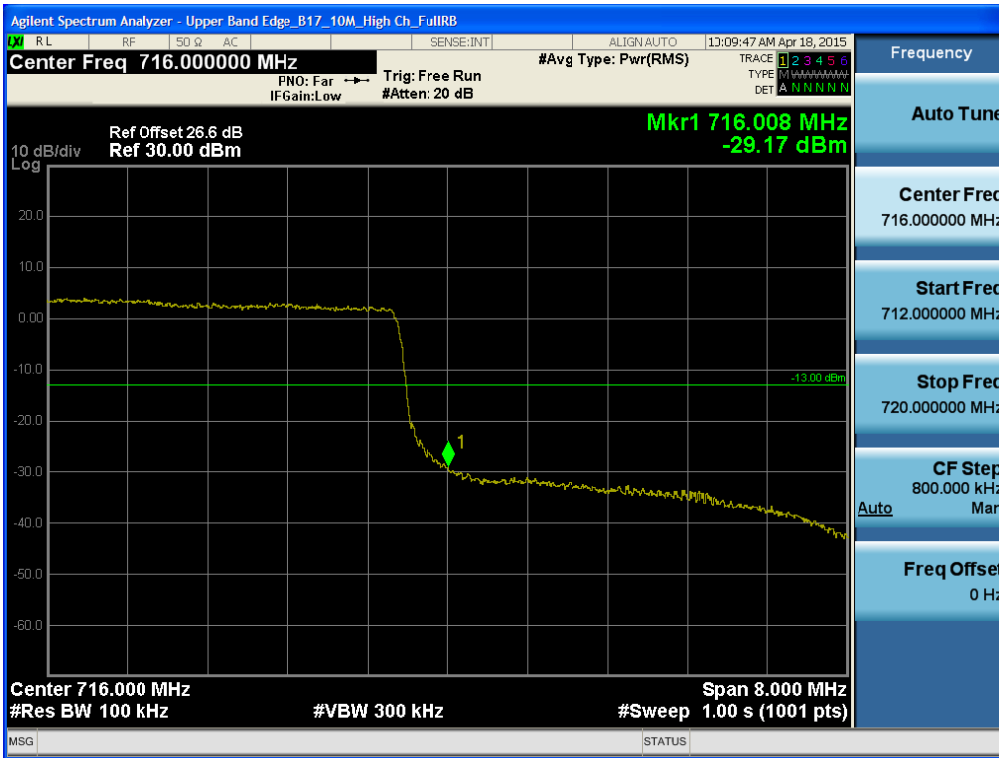


Band 17 Upper Extended Band Edge Plot (10M BW Ch.23800 QPSK\_RB50\_0)

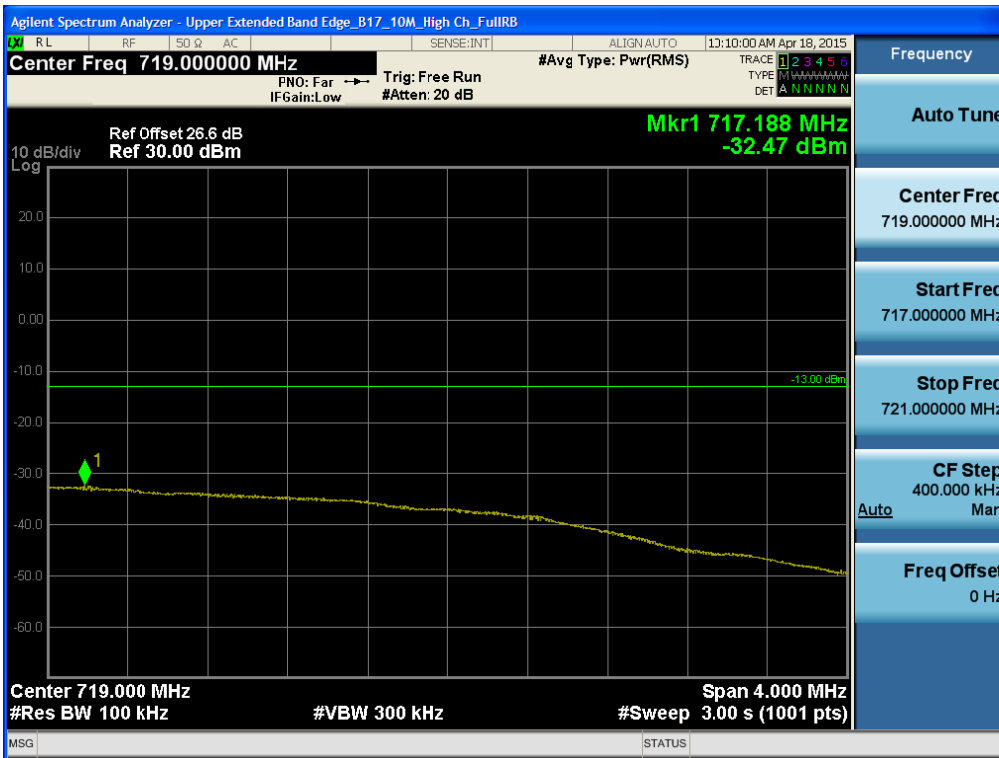

BAND 4. Lower Band Edge Plot (1.4M BW Ch.19957 QPSK RB 1, Offset 0) -1

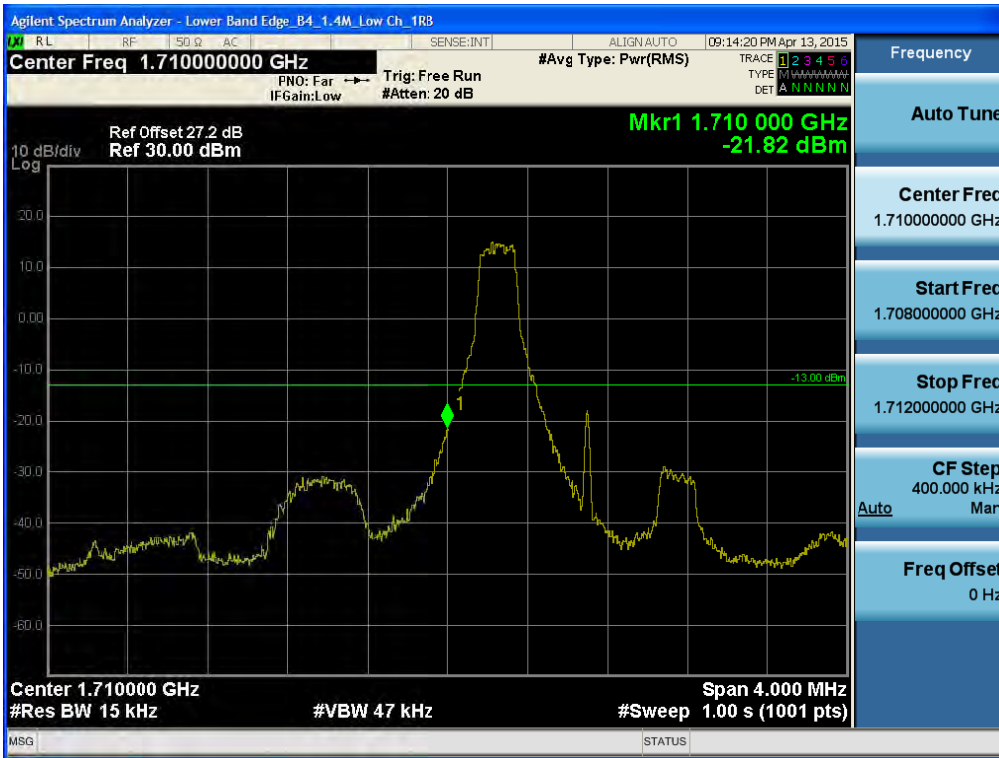


BAND 4. Lower Band Edge Plot (1.4M BW Ch.19957 QPSK RB 6) -2

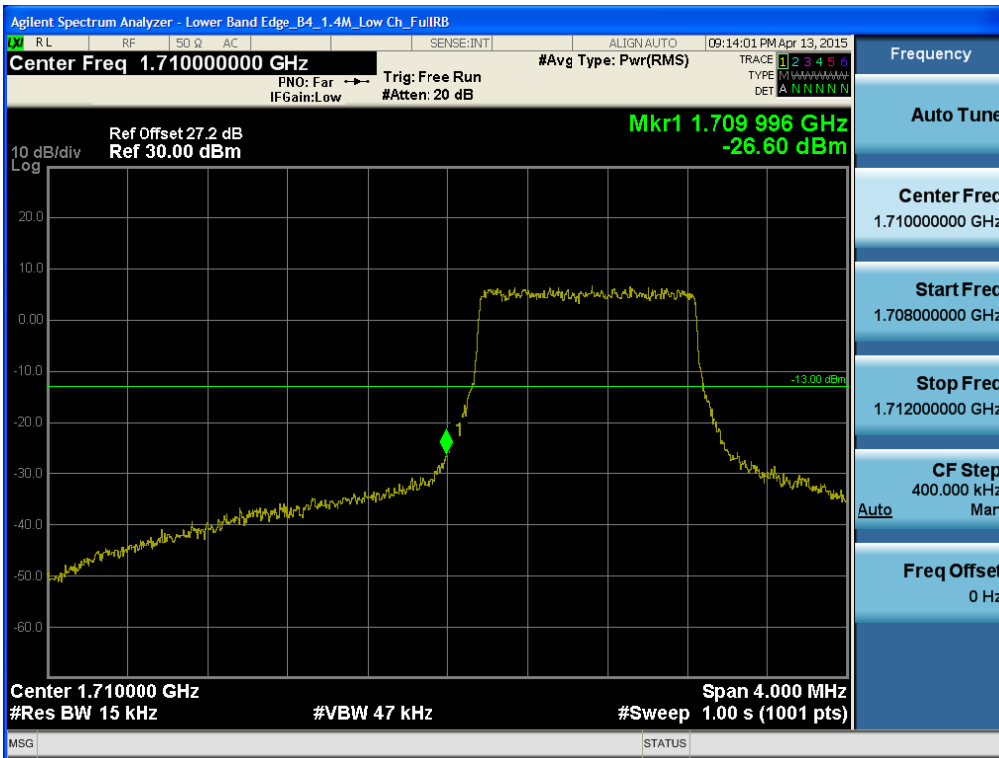


BAND 4. Lower Extended Band Edge Plot (1.4M BW Ch.19957 QPSK\_RB6\_0) -3




BAND 4. Lower Band Edge Plot (3M BW Ch.19965 QPSK RB 1, Offset 0) -1

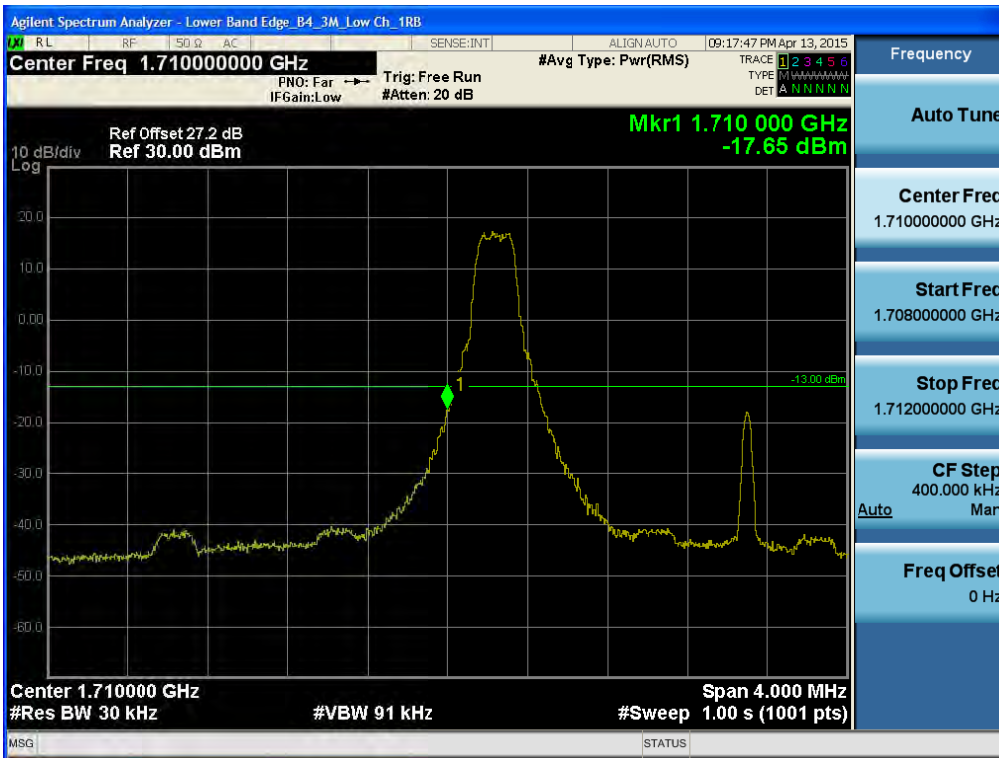


BAND 4. Lower Band Edge Plot (3M BW Ch.19965 QPSK RB 15) -2

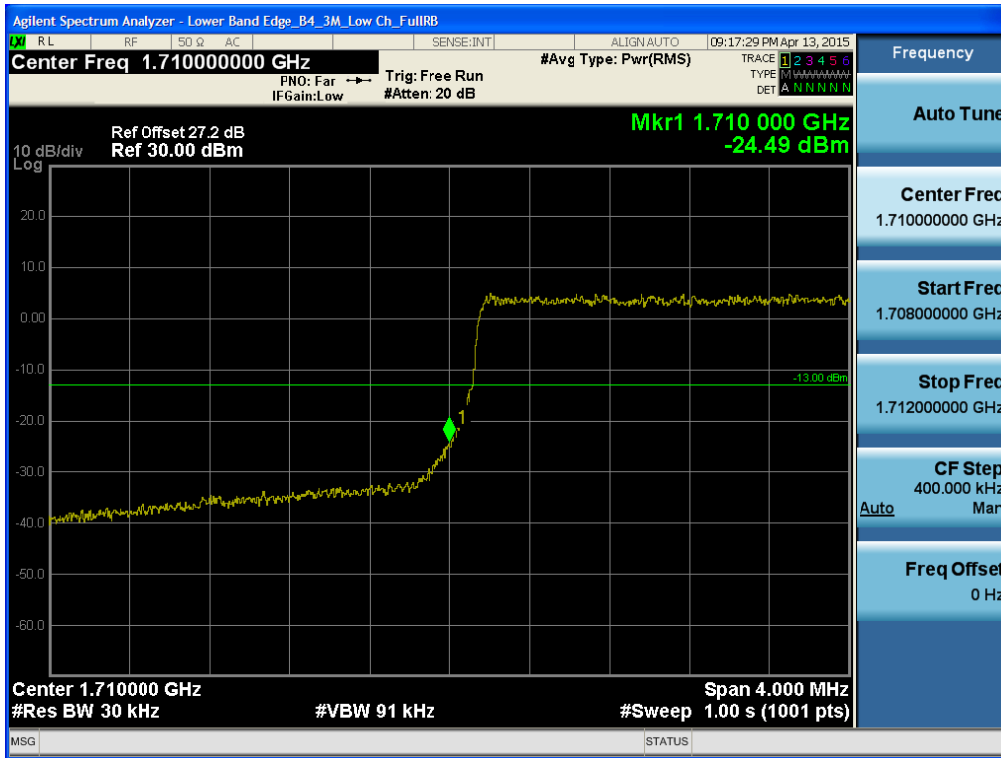


BAND 4. Lower Extended Band Edge Plot (3M BW Ch.19965 QPSK\_RB15\_0) -3

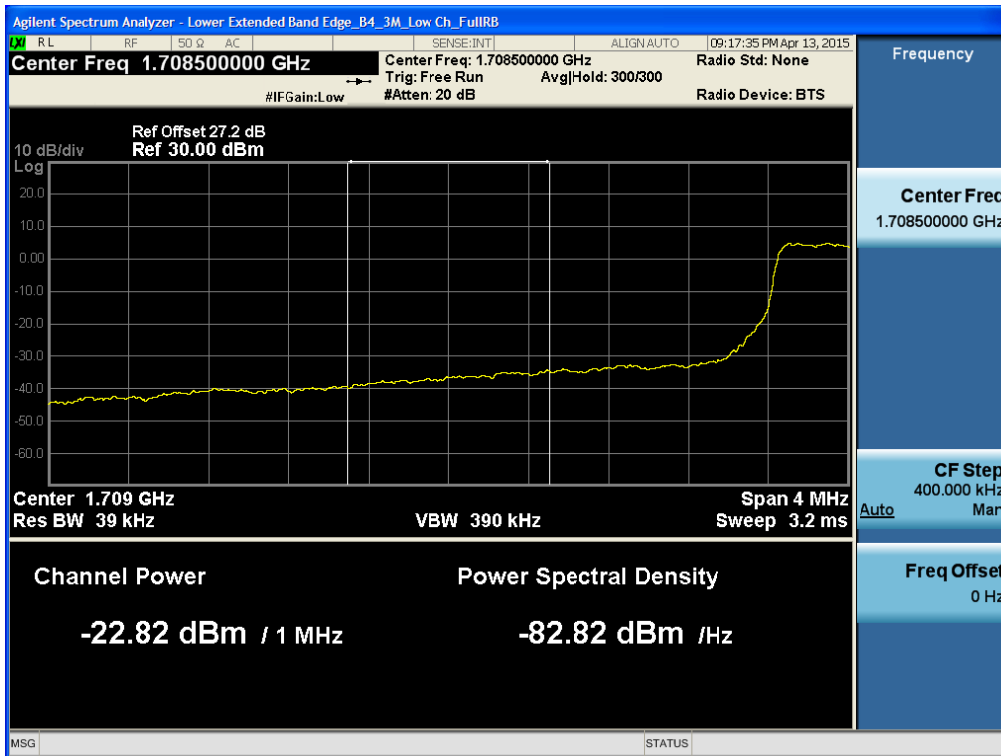


BAND 4. Lower Band Edge Plot (5M BW Ch.19975 QPSK RB 1, Offset 0) -1

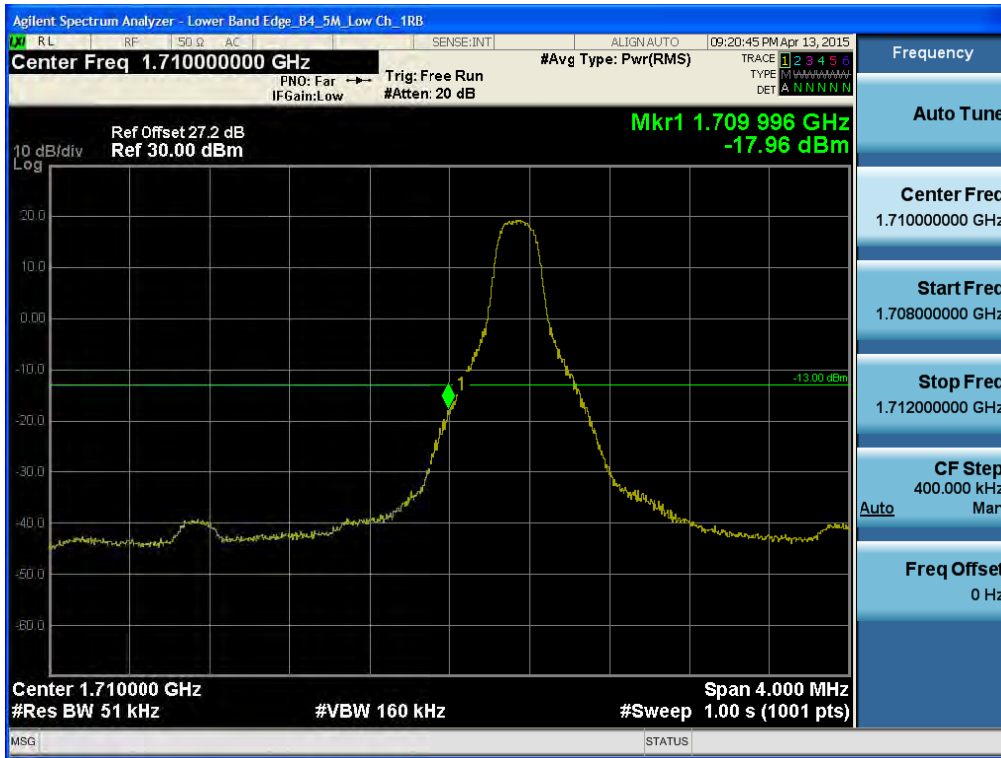


BAND 4. Lower Band Edge Plot (5M BW Ch.19975 QPSK RB 25) -2

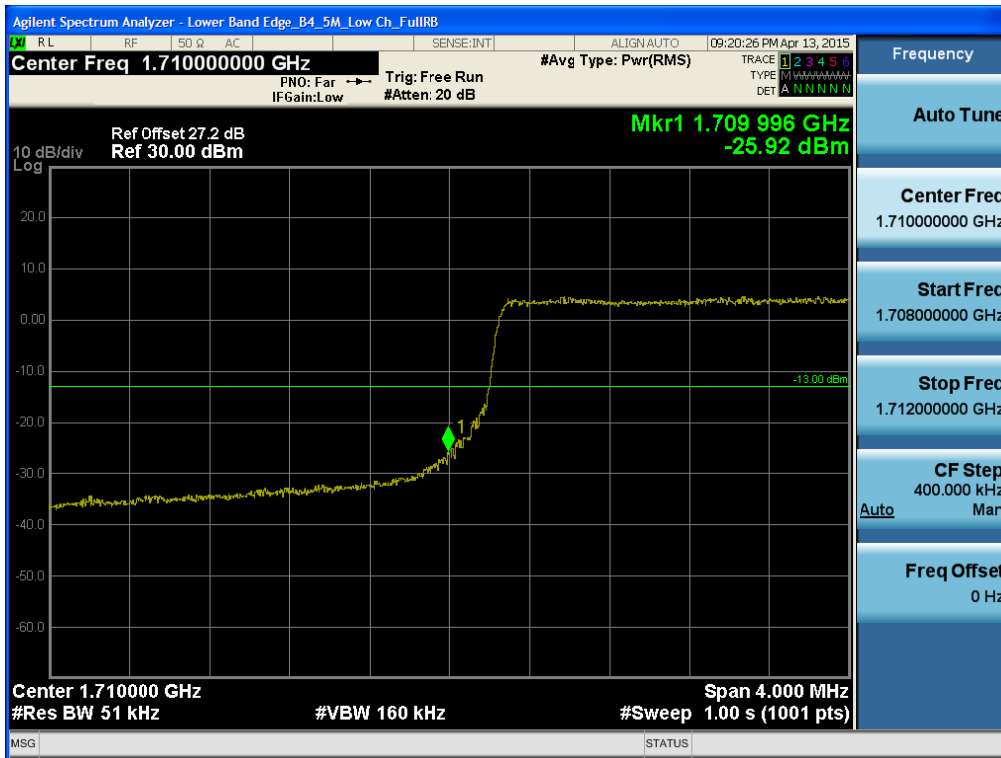


BAND 4. Lower Extended Band Edge Plot (5M BW Ch.19975 QPSK\_RB25\_0) -3

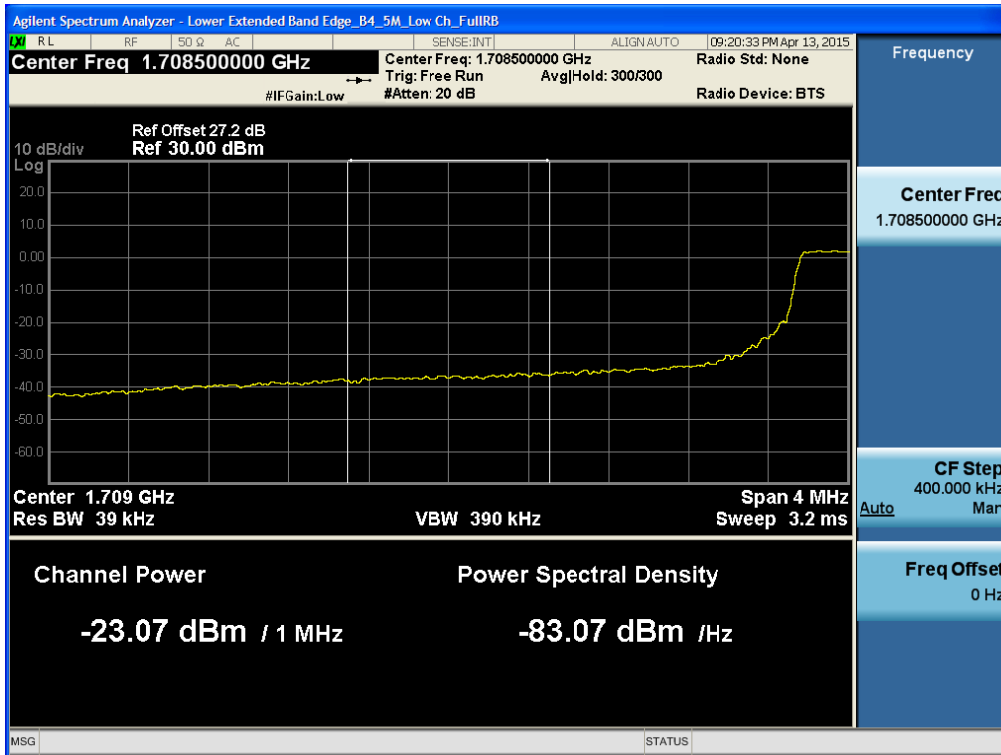


BAND 4. Lower Band Edge Plot (10M BW Ch.20000 QPSK RB 1, Offset 0) -1

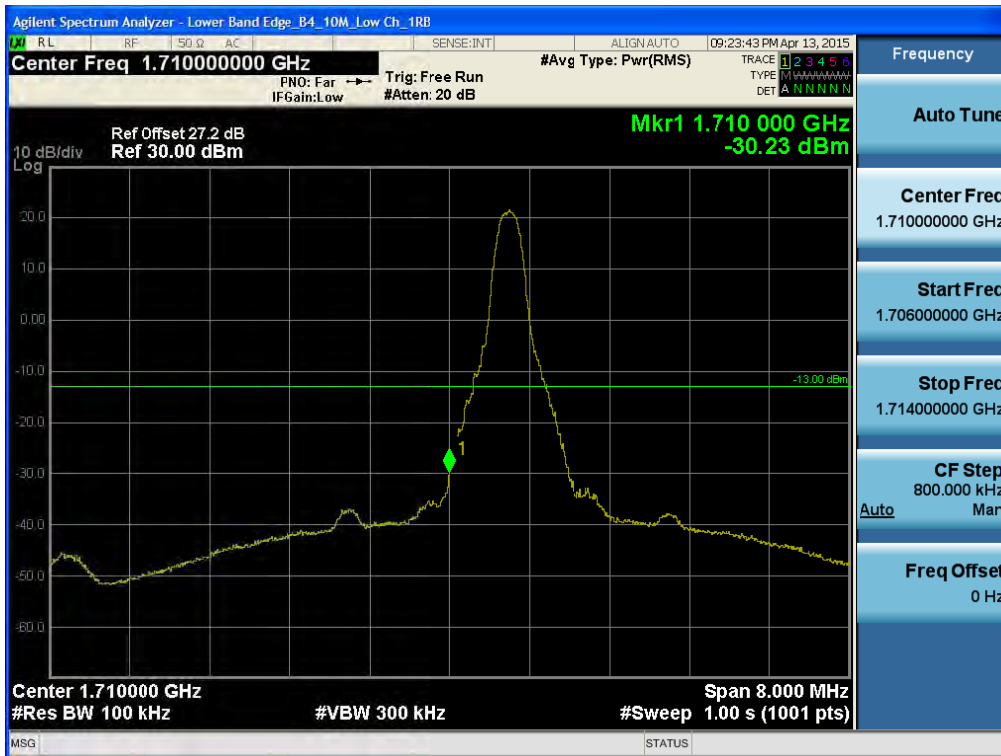


BAND 4. Lower Band Edge Plot (10M BW Ch.20000 QPSK RB 50) -2

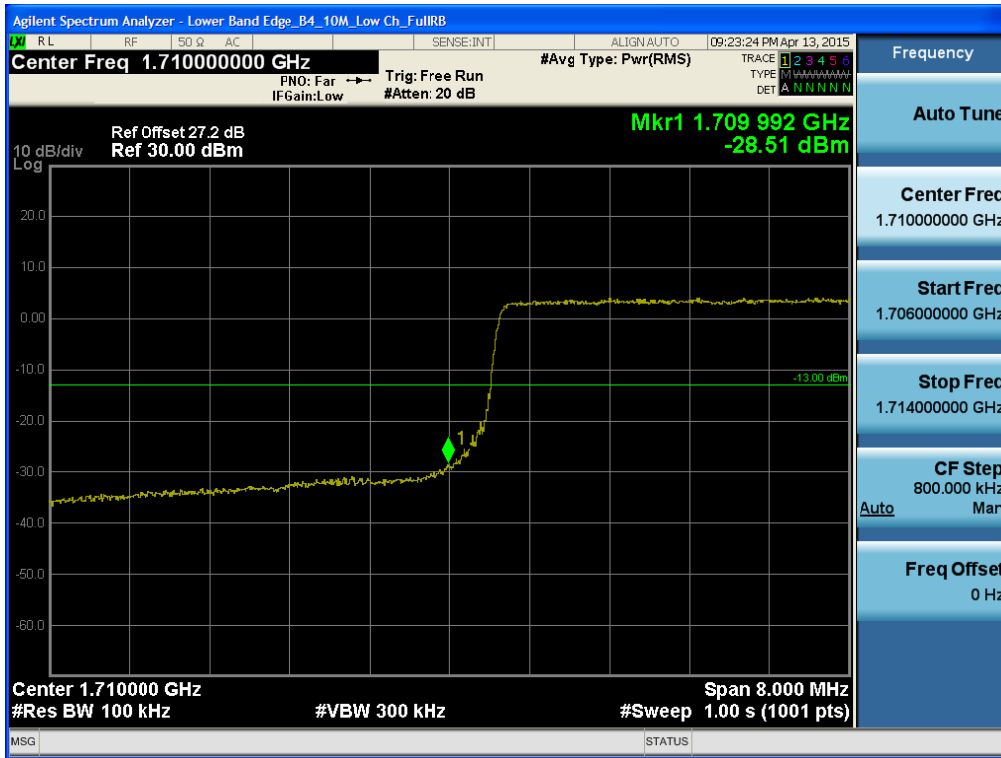


BAND 4. Lower Extended Band Edge Plot (10M BW Ch.20000 QPSK\_RB50\_0) -3

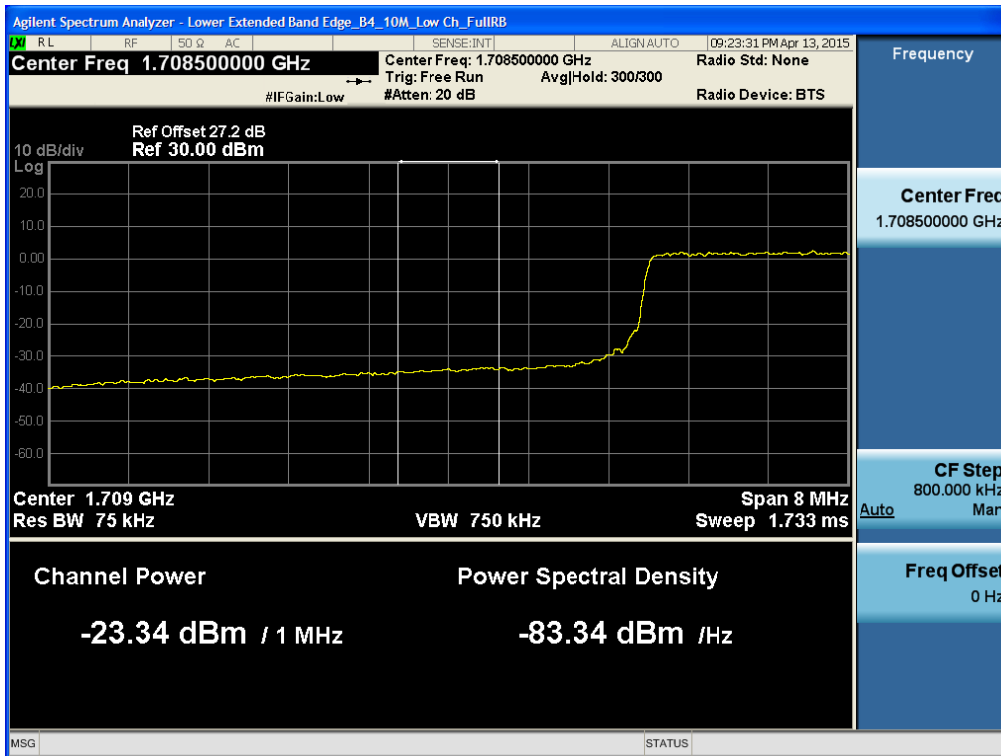


BAND 4. Lower Band Edge Plot (15M BW Ch.20025 QPSK RB 1, Offset 0) -1

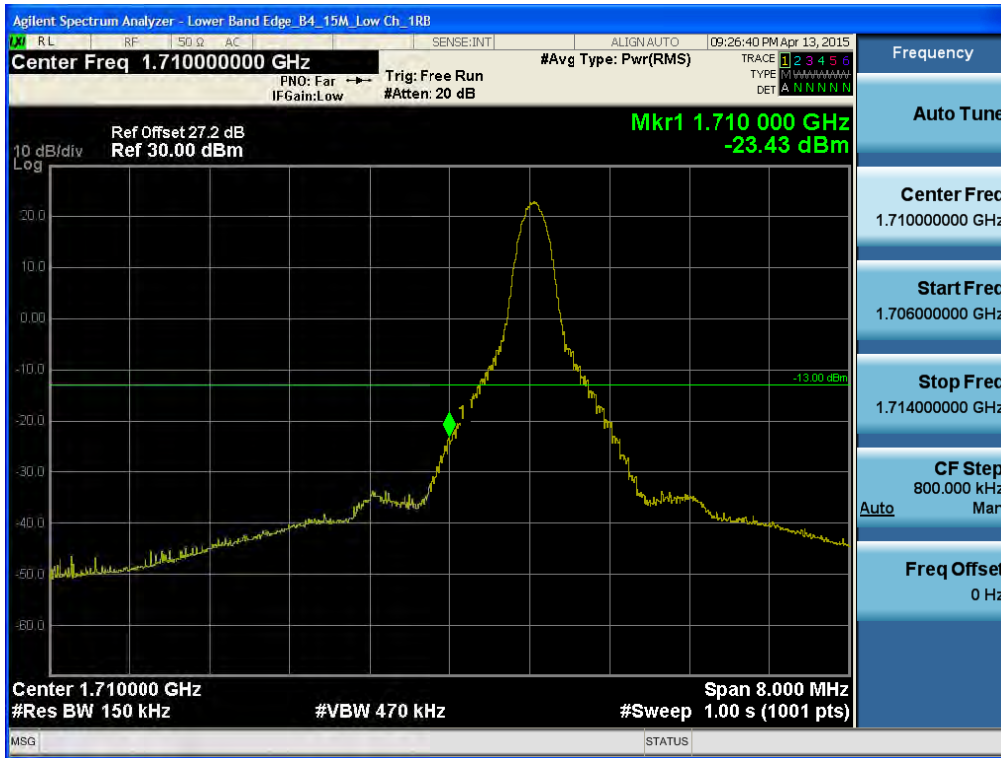


BAND 4. Lower Band Edge Plot (15M BW Ch.20025 QPSK RB 75) -2

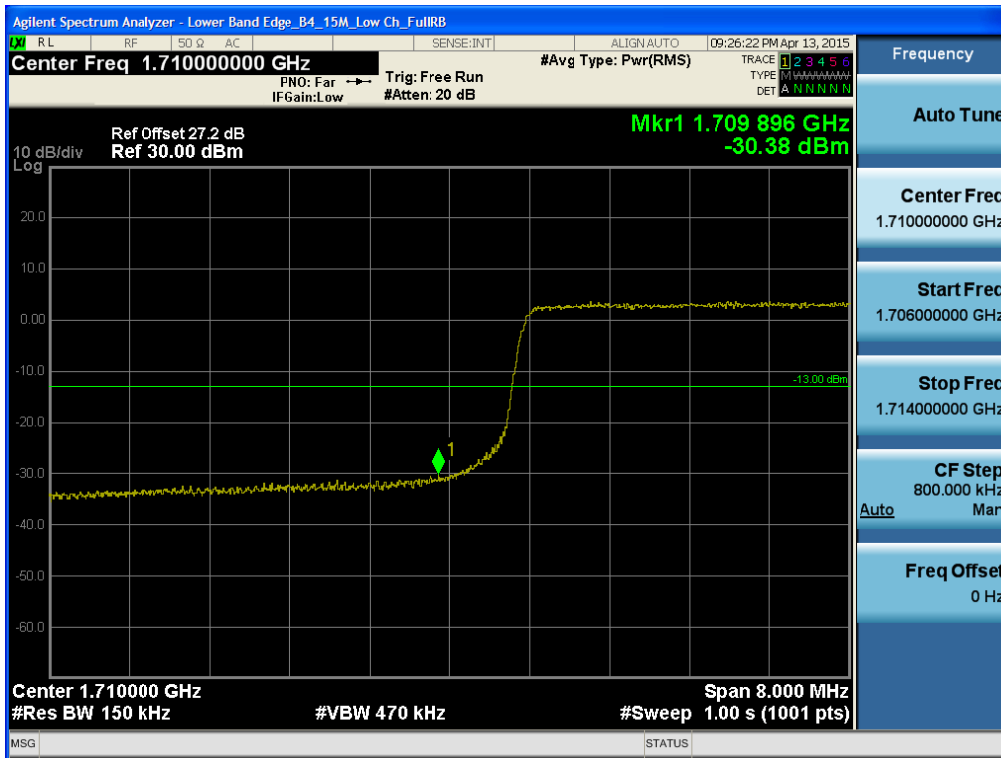


BAND 4. Lower Extended Band Edge Plot (15M BW Ch.20025 QPSK\_RB75\_0) -3

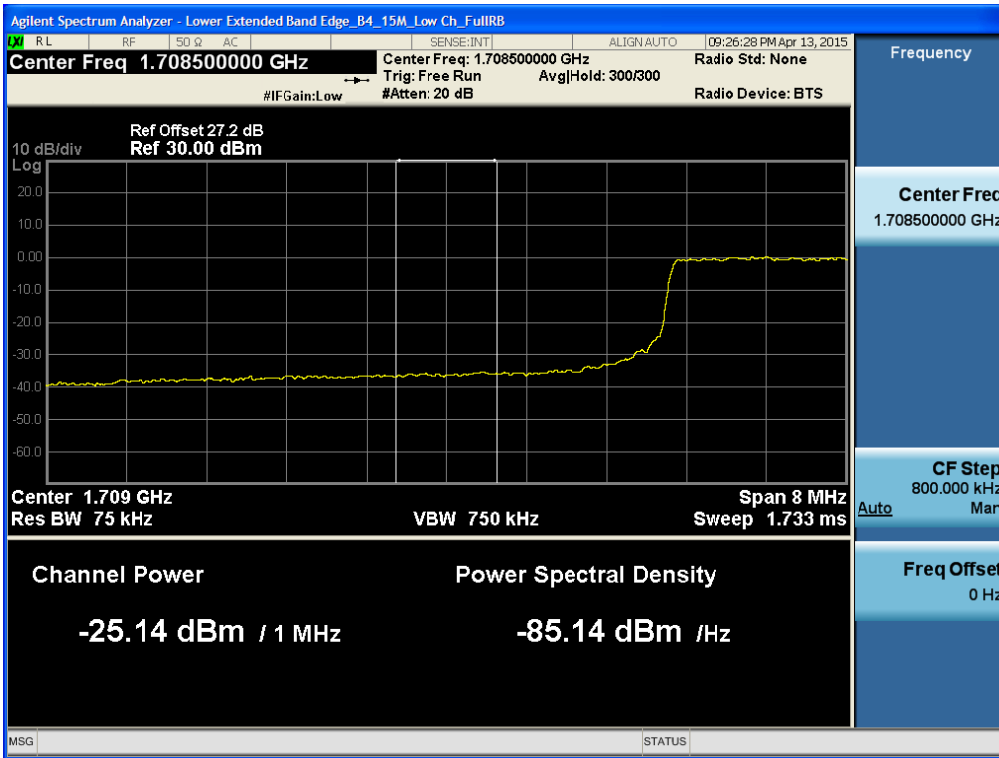


BAND 4. Lower Band Edge Plot (20M BW Ch.20050 QPSK RB 1, Offset 0) -1

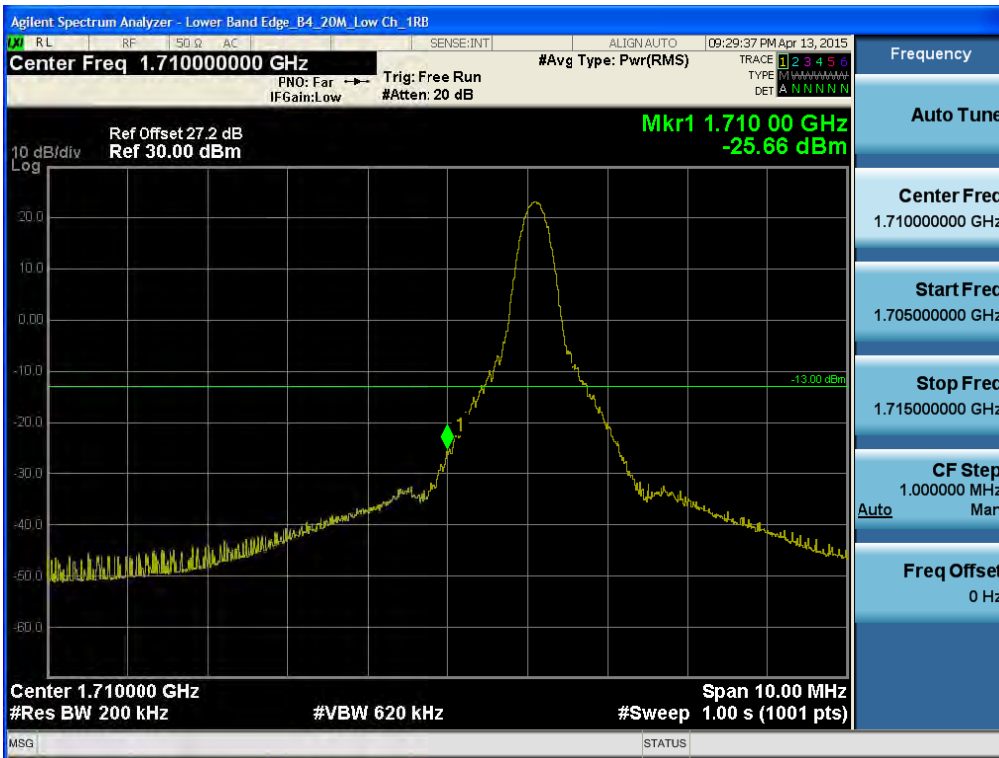

BAND 4. Lower Band Edge Plot (20M BW Ch.20050 QPSK RB 100) -2

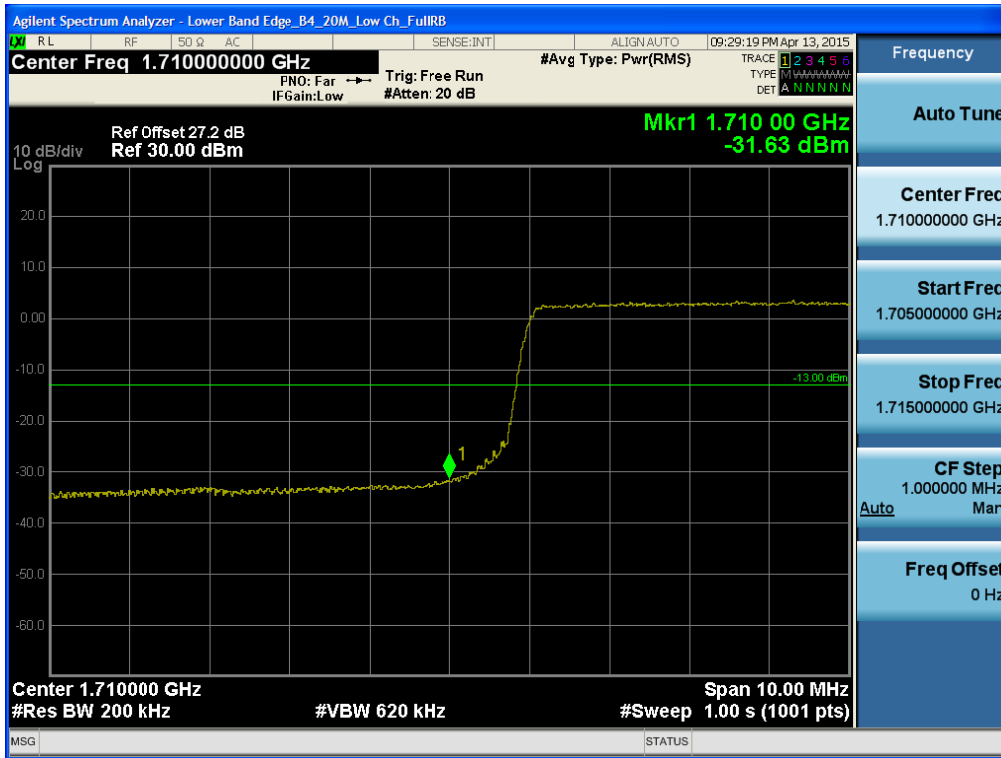


BAND 4. Lower Extended Band Edge Plot (20M BW Ch.20050 QPSK\_RB100\_0) -3

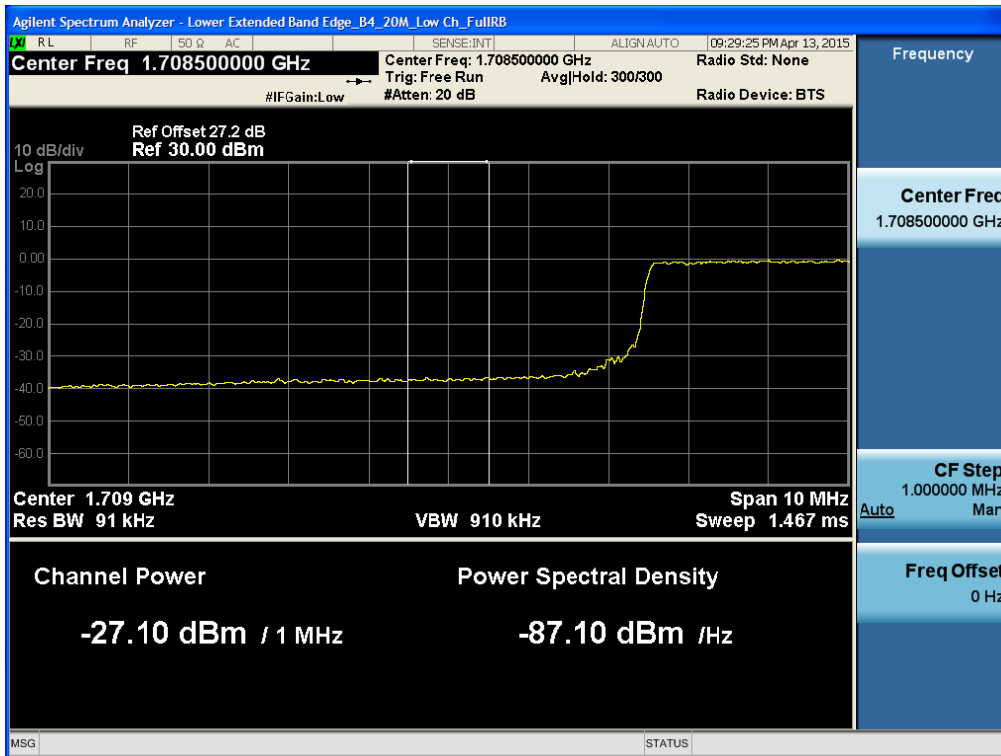


BAND 4. Upper Band Edge Plot (1.4M BW Ch.20393 QPSK\_RB1\_Offset) -1




BAND 4. Upper Band Edge Plot (1.4M BW Ch.20393 QPSK\_RB6) -2

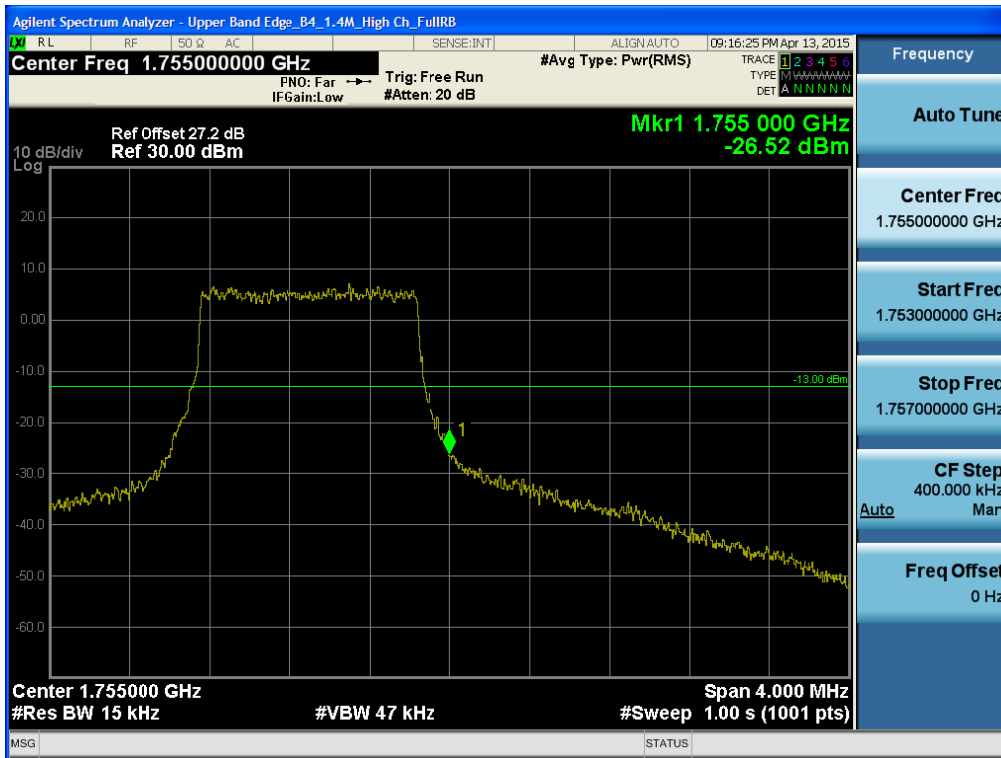


BAND 4. Upper Extended Band Edge Plot (1.4M BW Ch. 20393 QPSK\_RB6\_0) -3

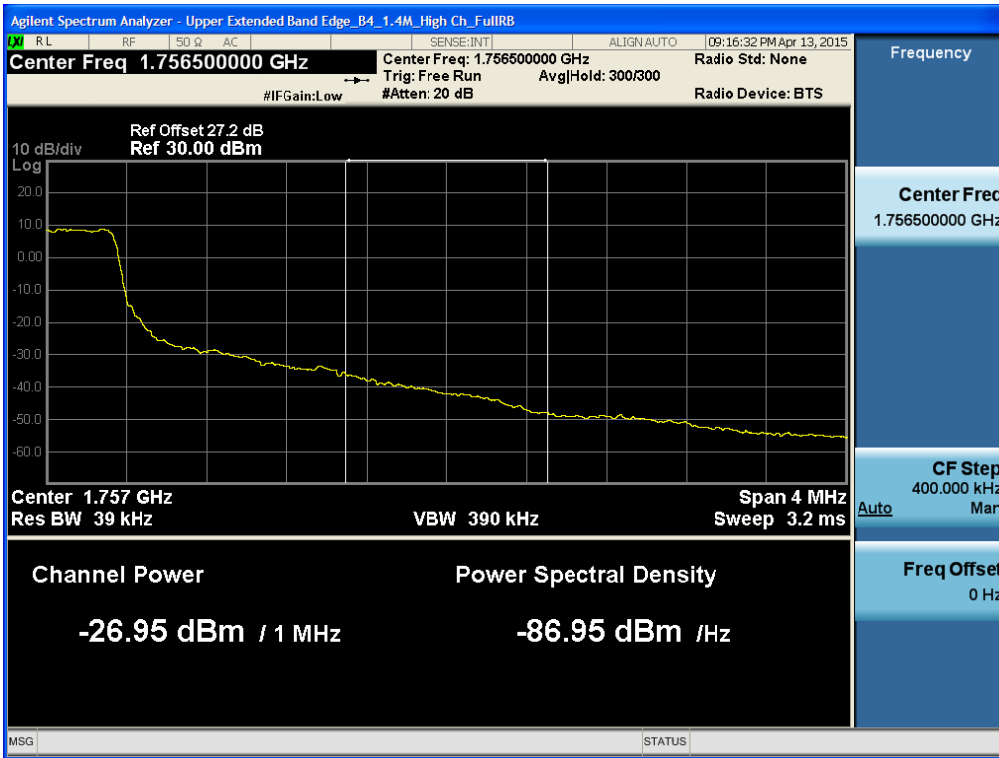


BAND 4. Upper Band Edge Plot (3M BW Ch.20385 QPSK\_RB1\_Offset 14) -1

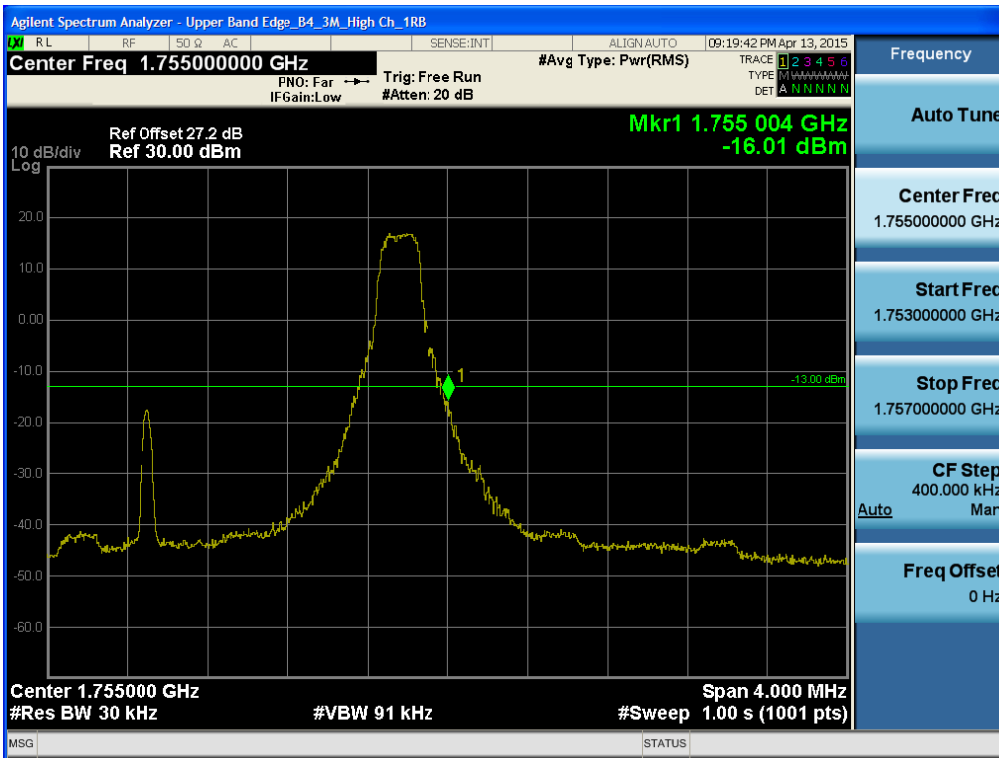


BAND 4. Upper Band Edge Plot (3M BW Ch.20385 QPSK\_RB15) -2

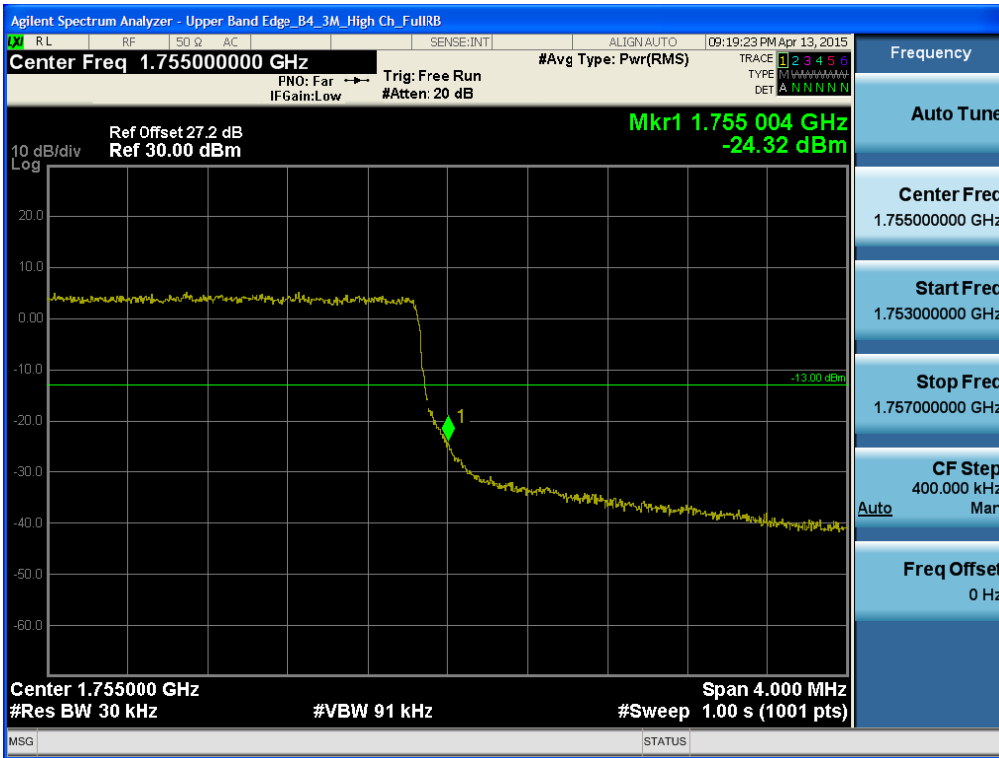


BAND 4. Upper Extended Band Edge Plot (3M BW Ch.20385 QPSK\_RB15\_0) -3

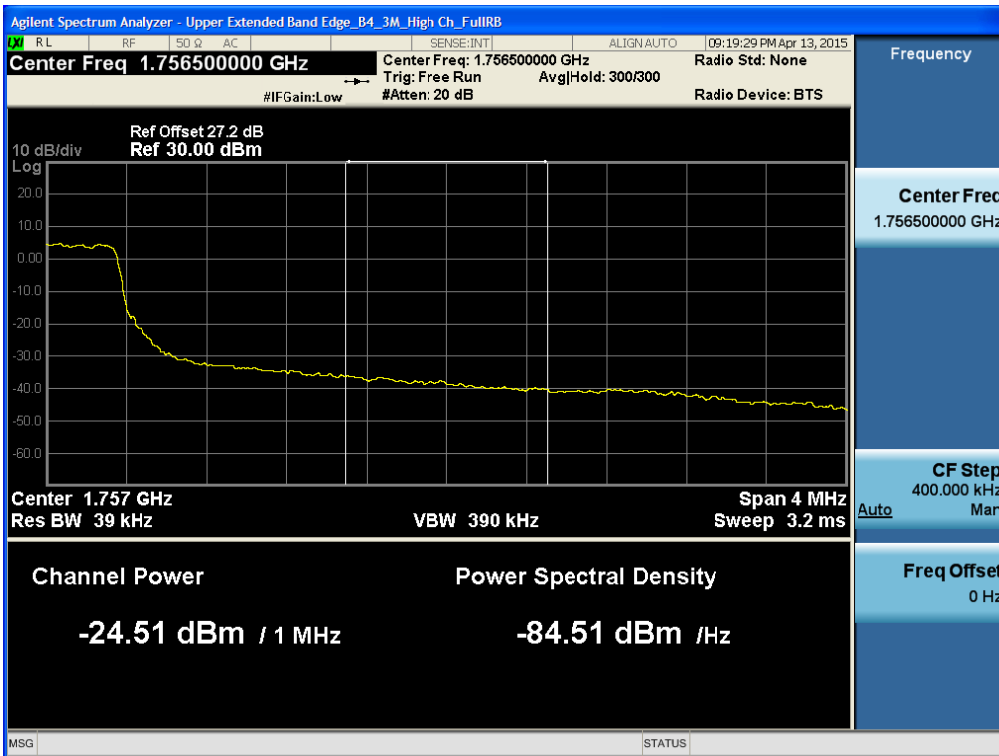


BAND 4. Upper Band Edge Plot (5M BW Ch.20375 QPSK\_RB1\_Offset 24) -1

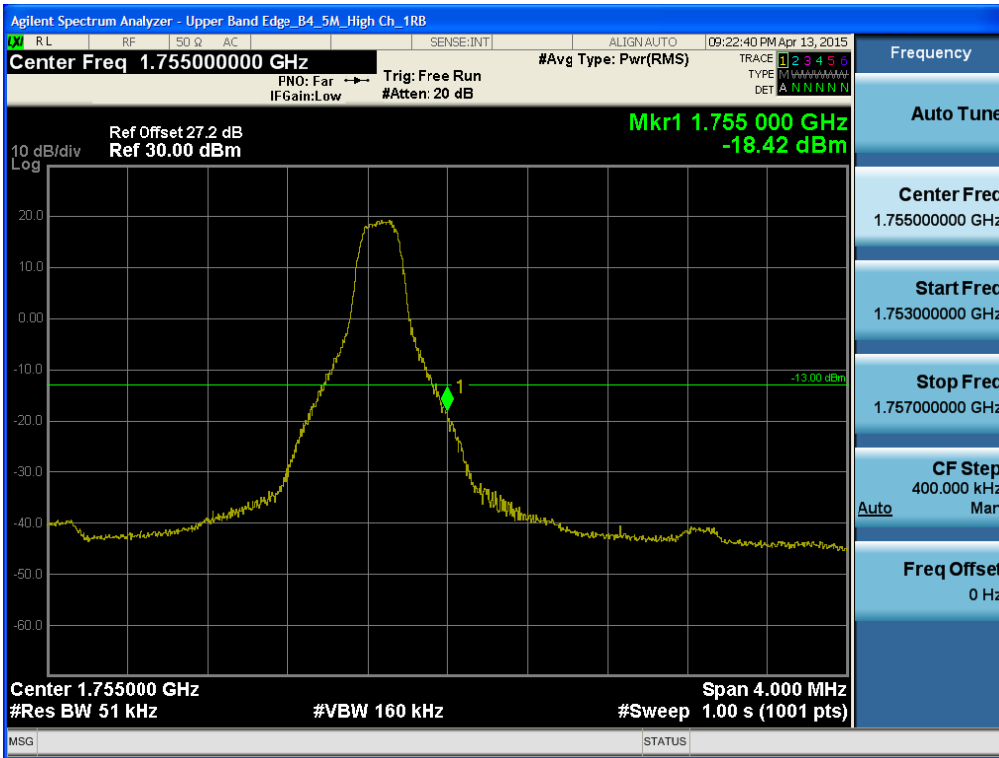


BAND 4. Upper Band Edge Plot (5M BW Ch.20375 QPSK\_RB25) -2

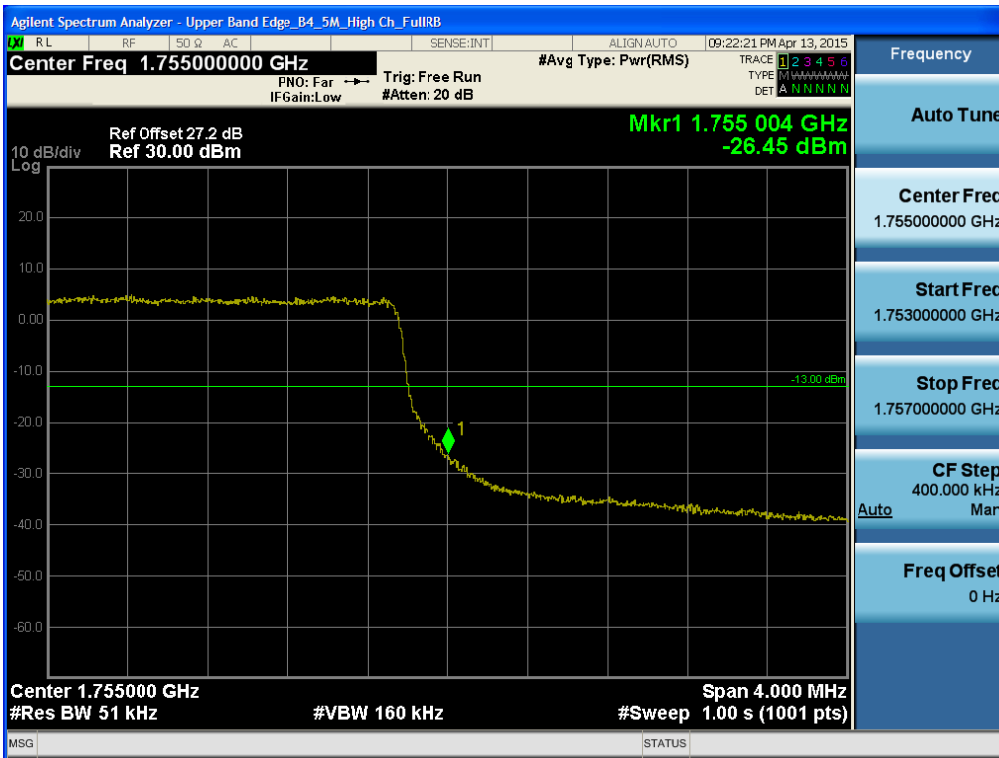

BAND 4. Upper Extended Band Edge Plot (5M BW Ch.20375 QPSK\_RB25) -3

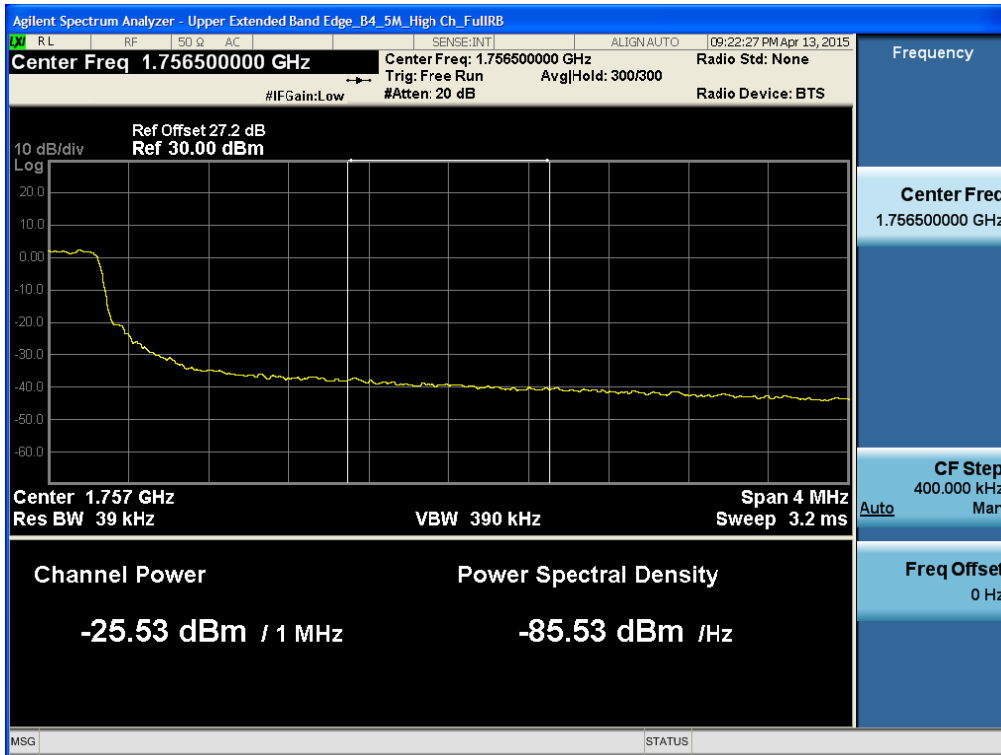

BAND 4. Upper Band Edge Plot (10M BW Ch.20350 QPSK\_RB1\_Offset 49) -1

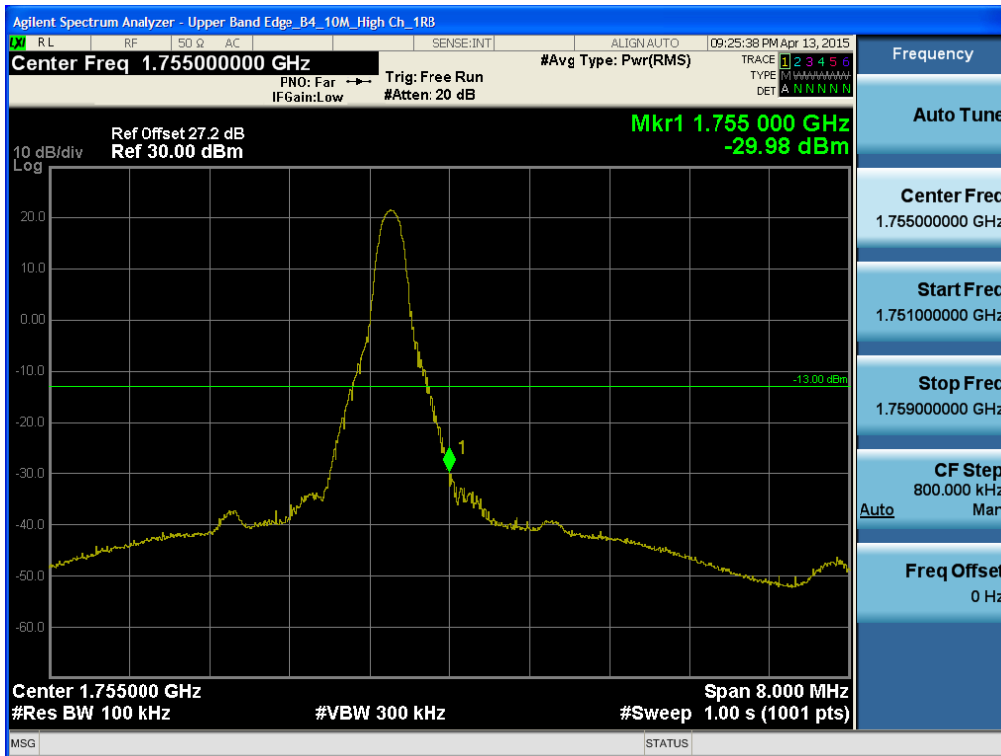


BAND 4. Upper Band Edge Plot (10M BW Ch.20350 QPSK\_RB50) -2




BAND 4. Upper Extended Band Edge Plot (10M BW Ch.20350 QPSK\_RB50) -3



BAND 4. Upper Band Edge Plot (15M BW Ch.20325 QPSK\_RB1\_Offset 74) -1

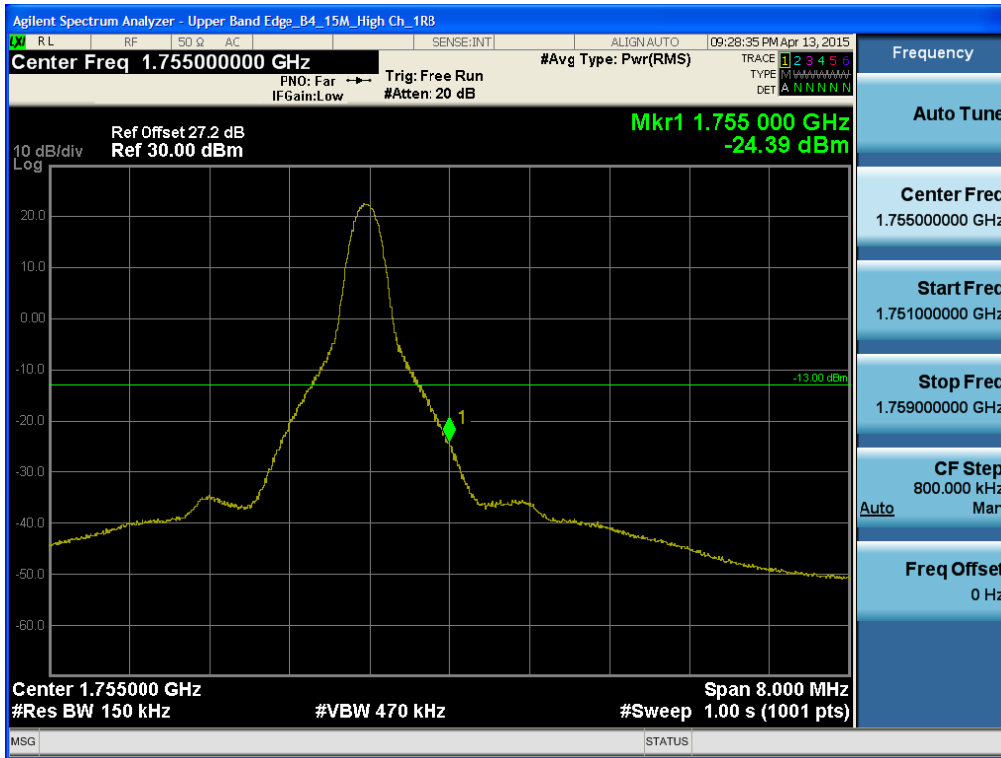


BAND 4. Upper Band Edge Plot (15M BW Ch.20325 QPSK\_RB75) -2

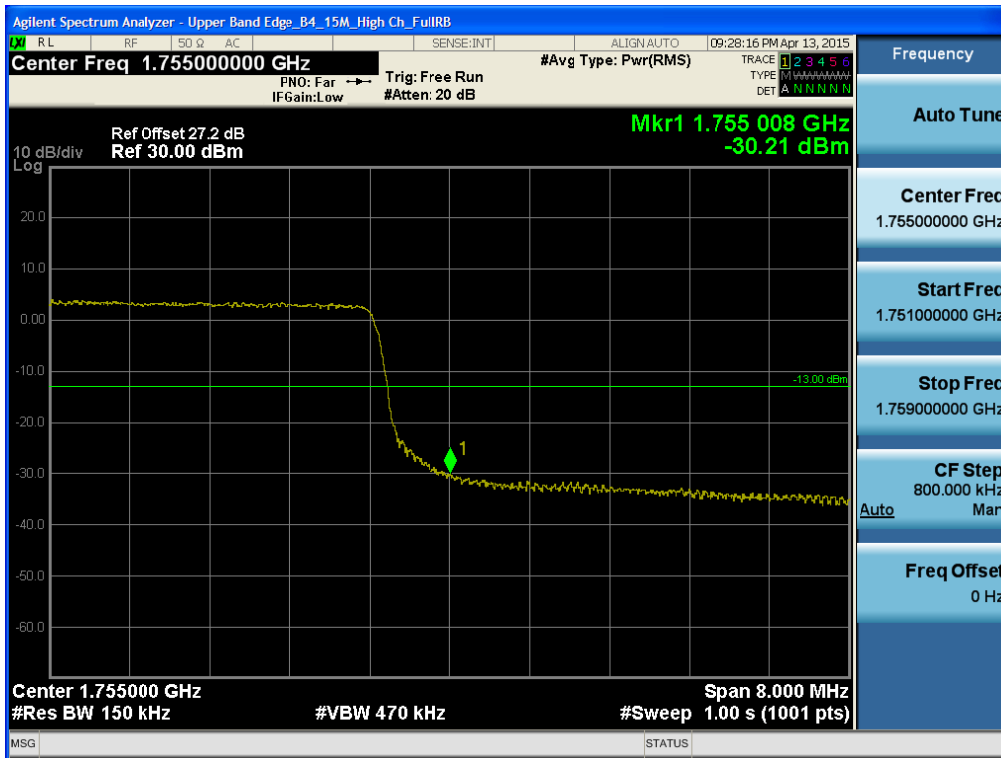





BAND 4. Upper Band Edge Plot (20M BW Ch.20300 QPSK\_RB100) -2

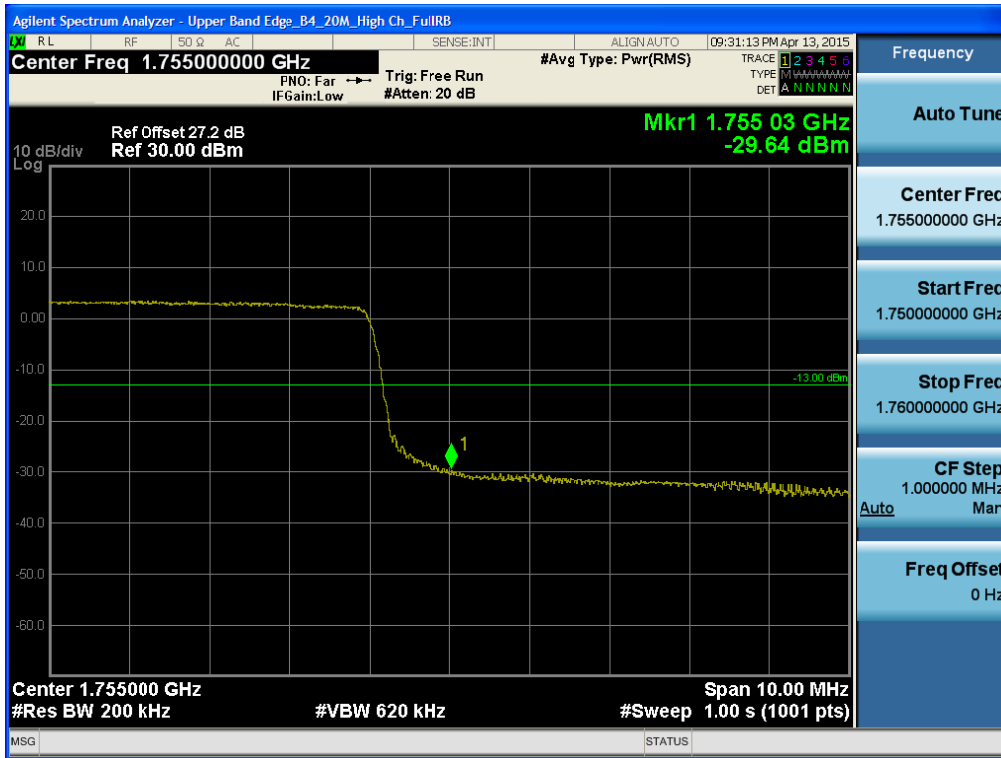


BAND 4. Upper Extended Band Edge Plot (20M BW Ch.20300 QPSK\_RB100) -3

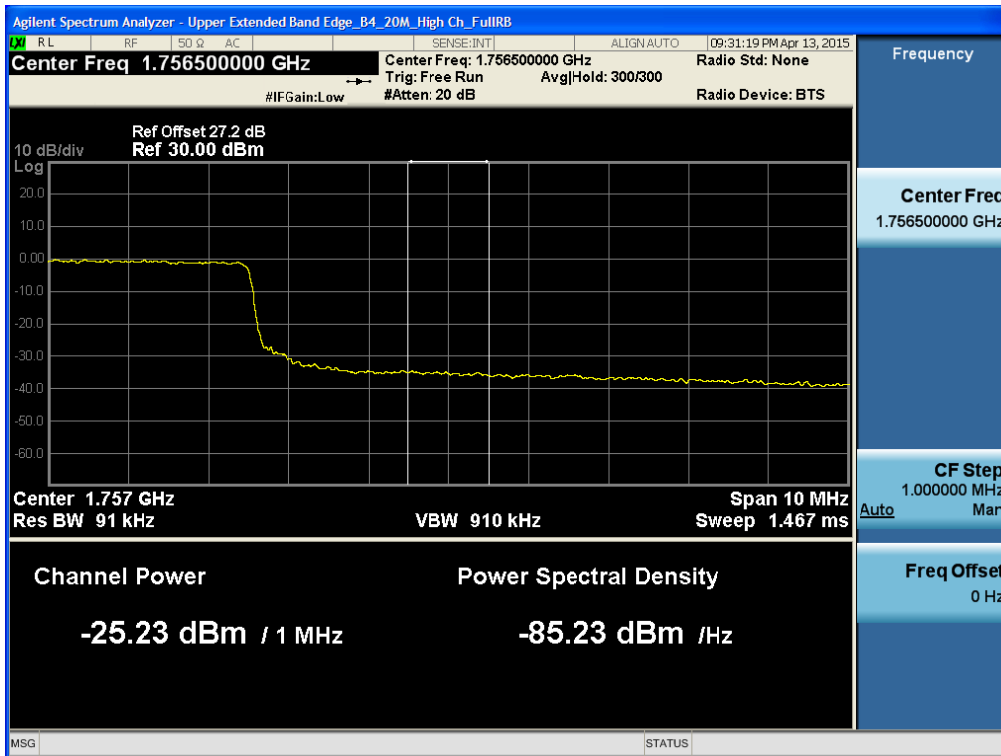


BAND 17. Conducted Spurious Plot\_1 (23755ch\_5MHz\_QPSK\_RB 1\_0)

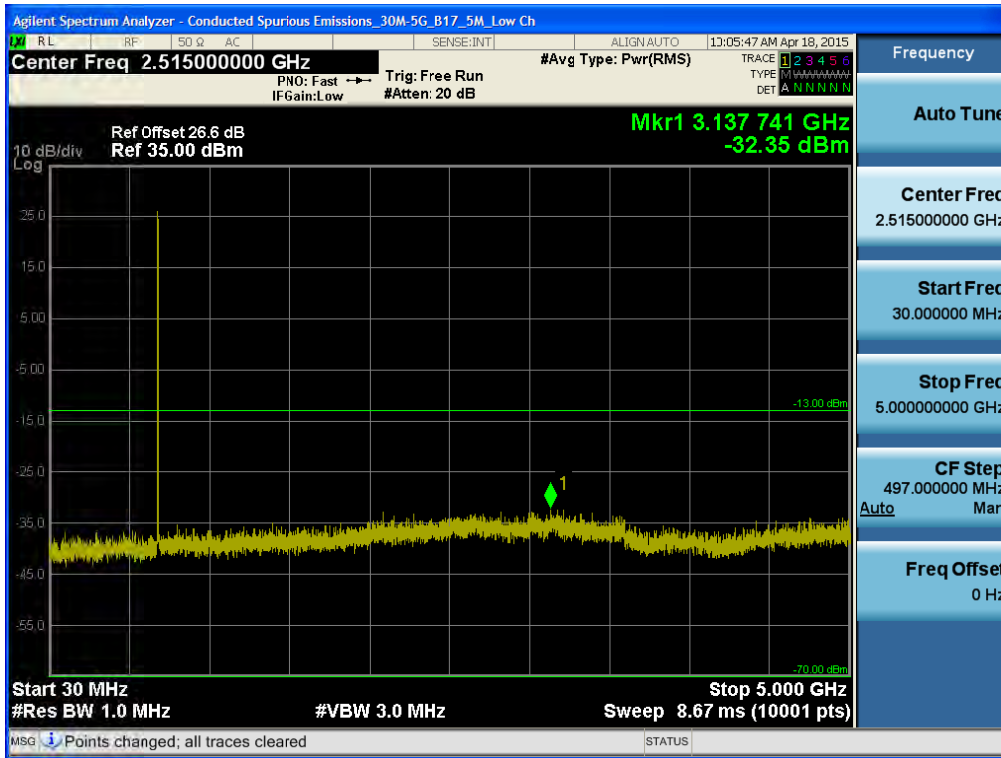


BAND 17. Conducted Spurious Plot\_2 (23755ch\_5MHz\_QPSK\_RB 1\_0)

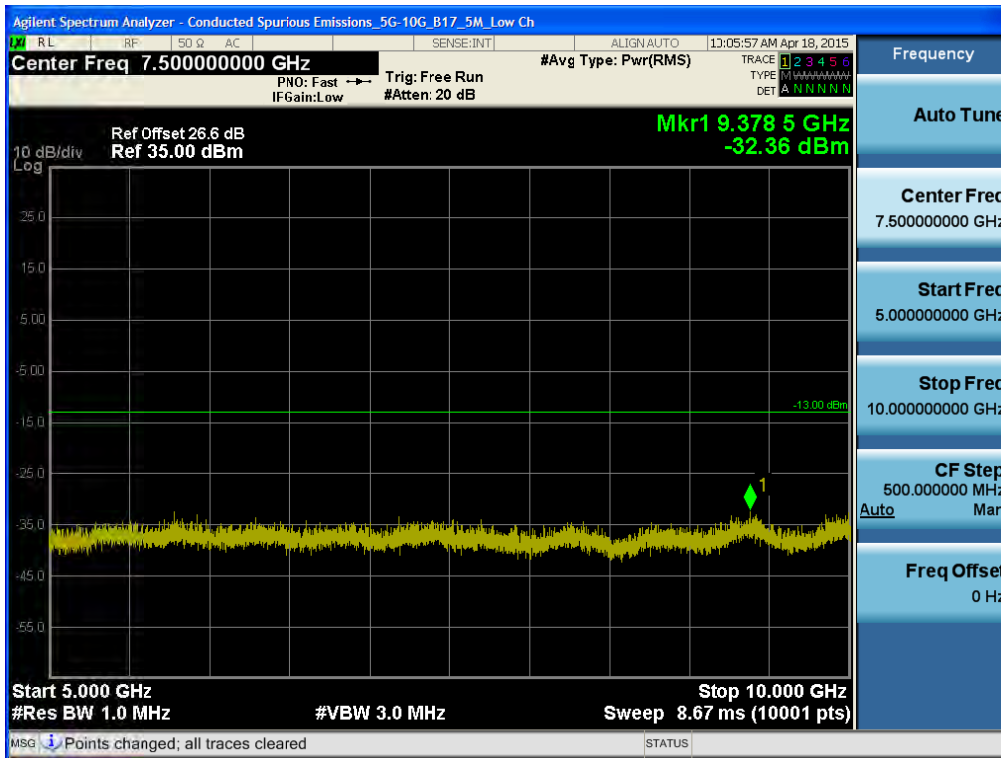


BAND 17. Conducted Spurious Plot\_1 (23790ch\_5MHz\_QPSK\_RB 1\_0)

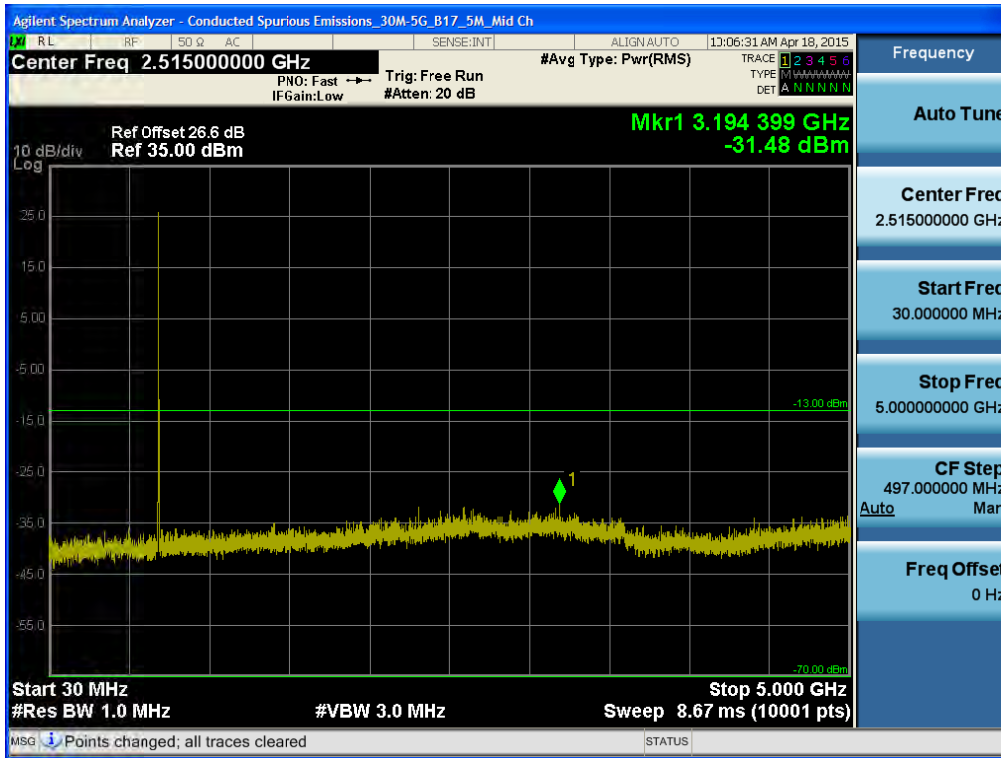


BAND 17. Conducted Spurious Plot\_2 (23790ch\_5MHz\_QPSK\_RB 1\_0)

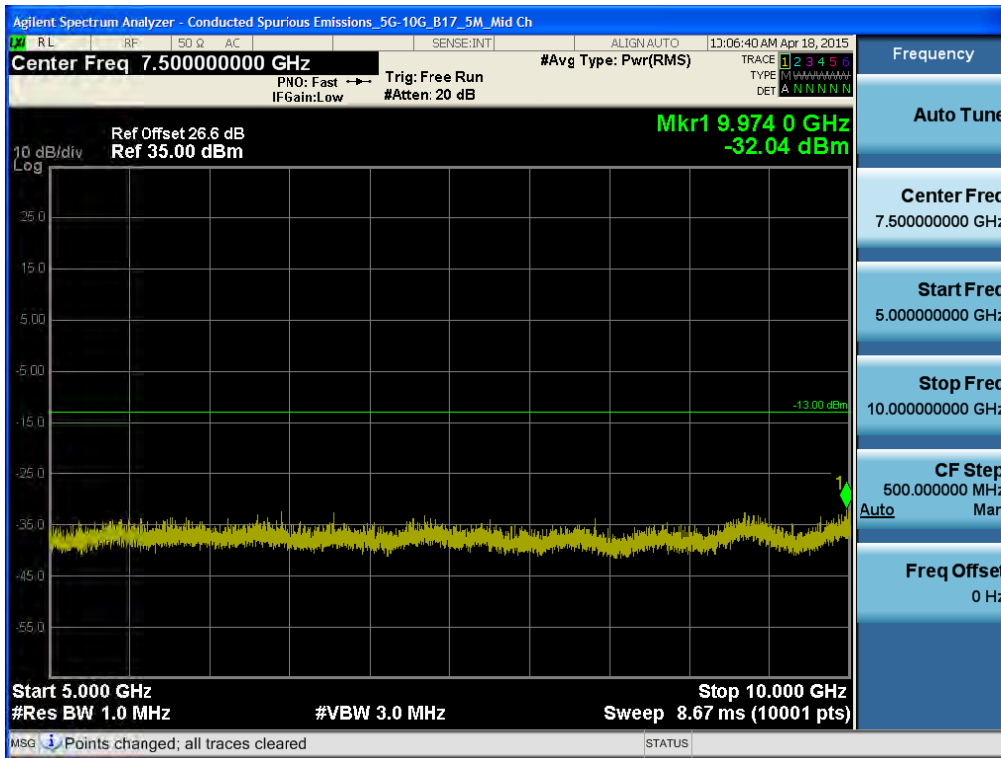


BAND 17. Conducted Spurious Plot\_1 (23825ch\_5MHz\_QPSK\_RB 1\_0)

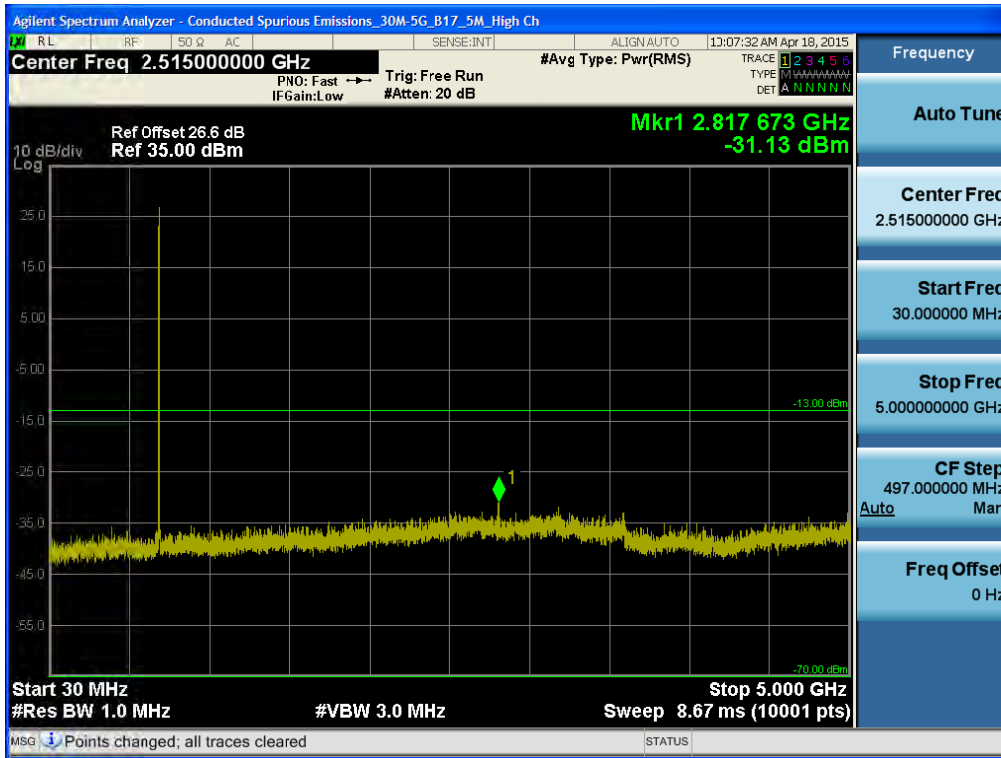


BAND 17. Conducted Spurious Plot\_2 (23825ch\_5MHz\_QPSK\_RB 1\_0)

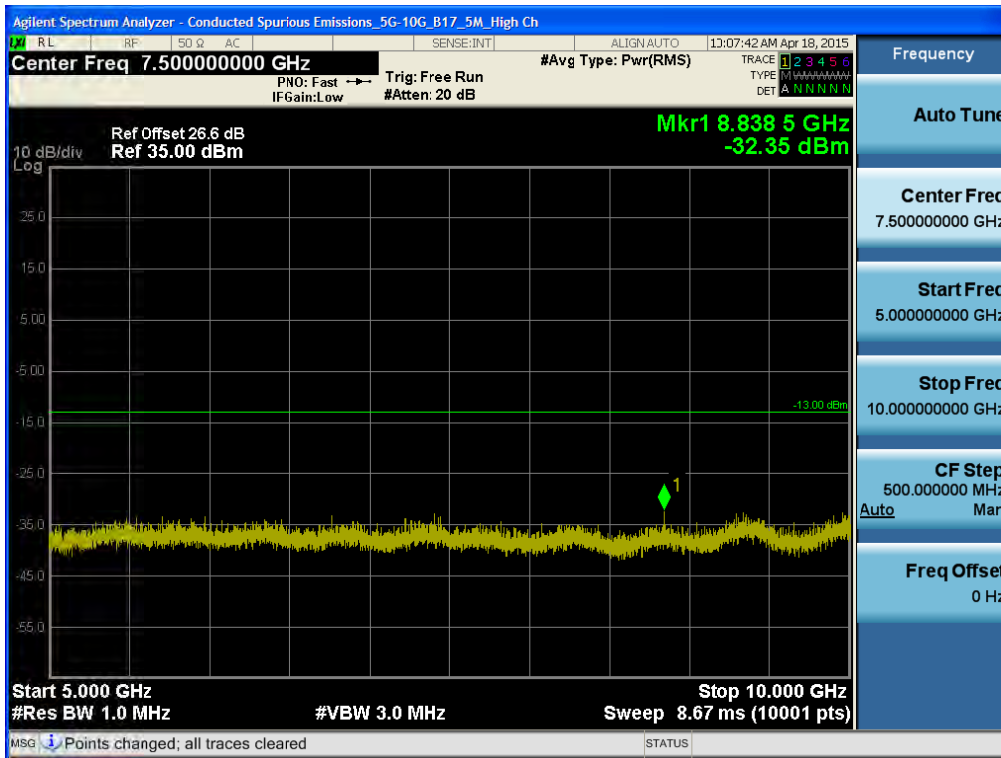


BAND 17. Conducted Spurious Plot\_1 (23780ch\_10MHz\_QPSK\_RB 1\_0)

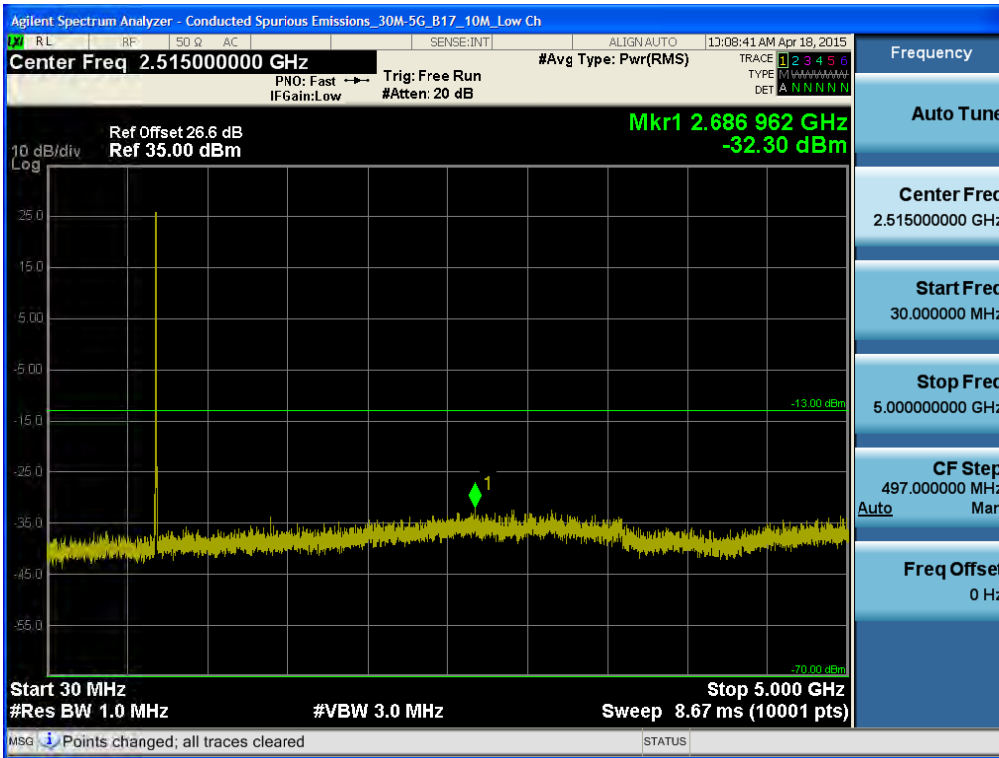


BAND 17. Conducted Spurious Plot\_2 (23780ch\_10MHz\_QPSK\_RB 1\_0)

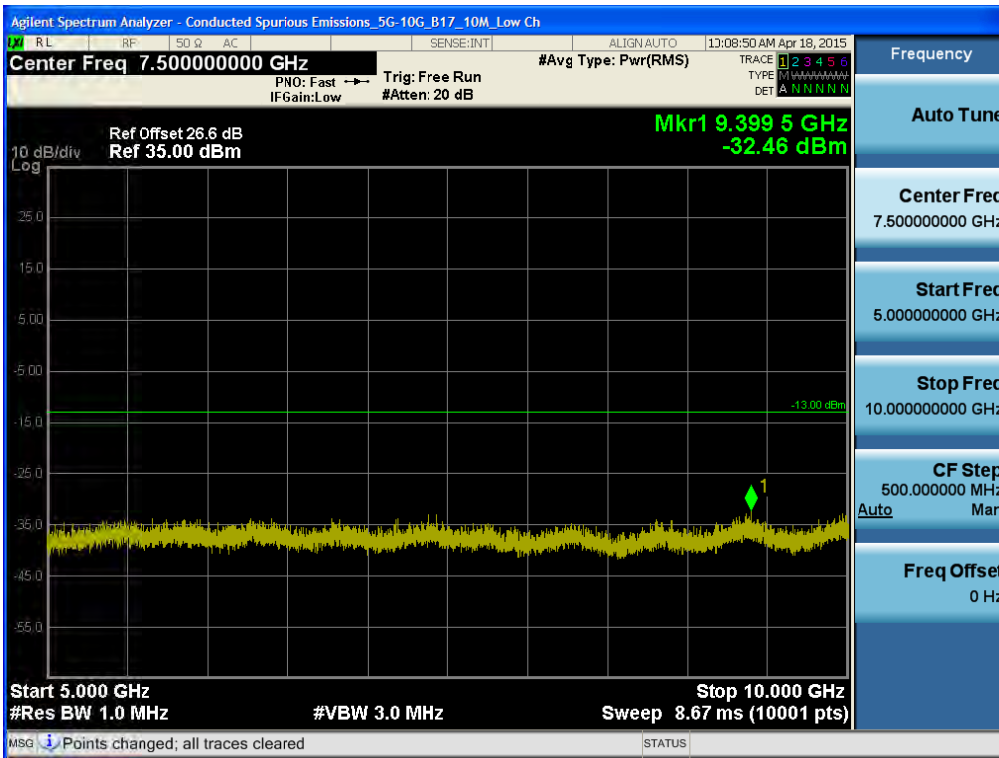


BAND 17. Conducted Spurious Plot\_1 (23790ch\_10MHz\_QPSK\_RB 1\_0)

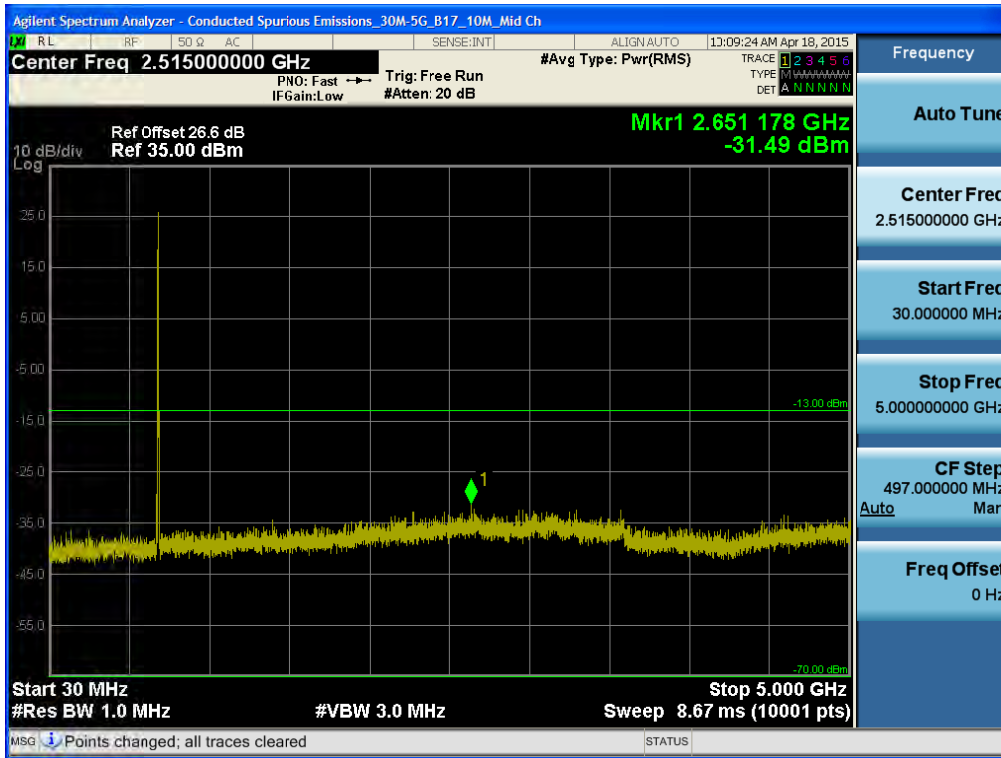


BAND 17. Conducted Spurious Plot\_2 (23790ch\_10MHz\_QPSK\_RB 1\_0)

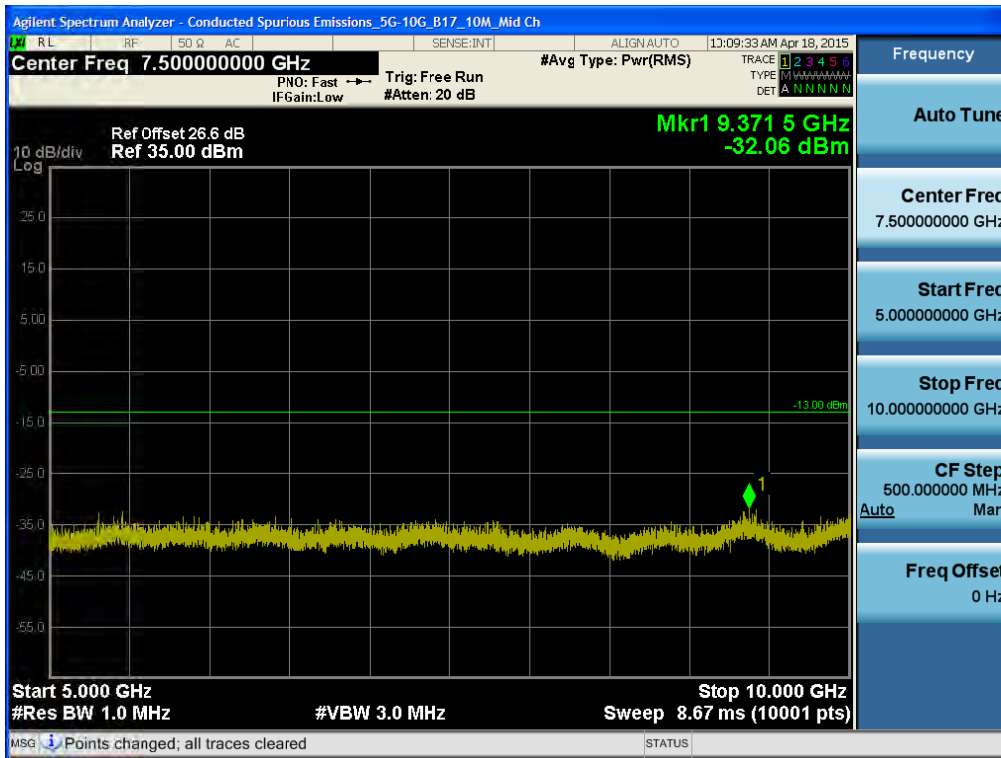


BAND 17. Conducted Spurious Plot\_1 (23800ch\_10MHz\_QPSK\_RB 1\_0)

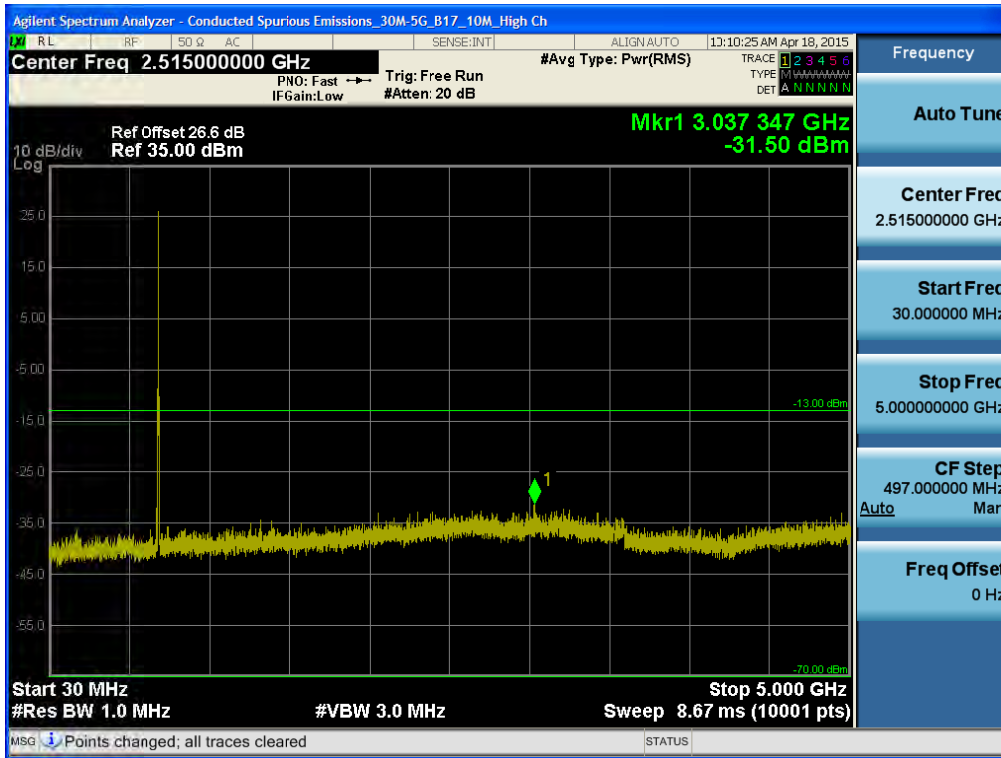


BAND 17. Conducted Spurious Plot\_2 (23800ch\_10MHz\_QPSK\_RB 1\_0)

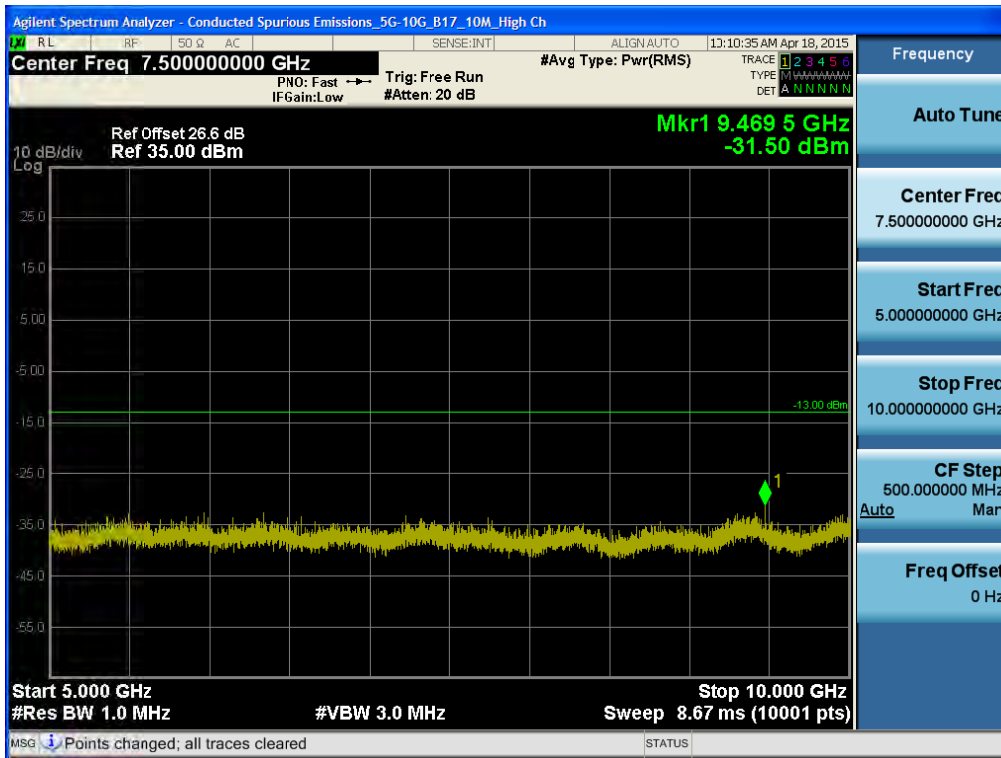


BAND 4. Conducted Spurious Plot\_1 (19957ch\_1.4MHz\_QPSK\_RB 1\_0)

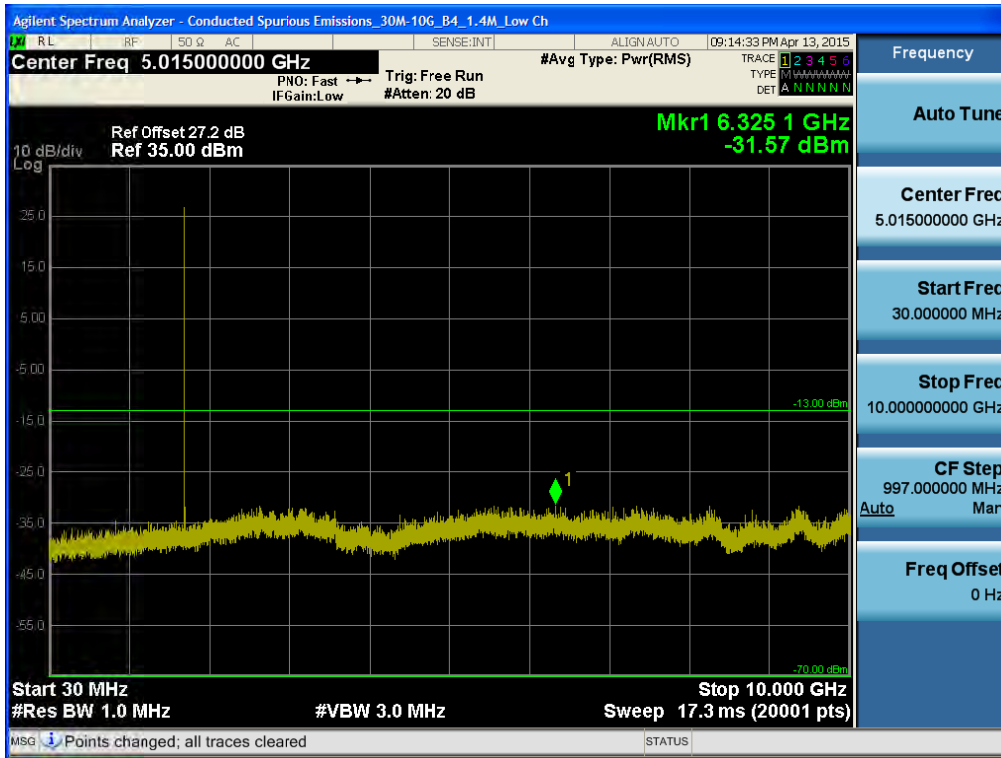


BAND 4. Conducted Spurious Plot\_2 (19957ch\_1.4MHz\_QPSK\_RB 1\_0)

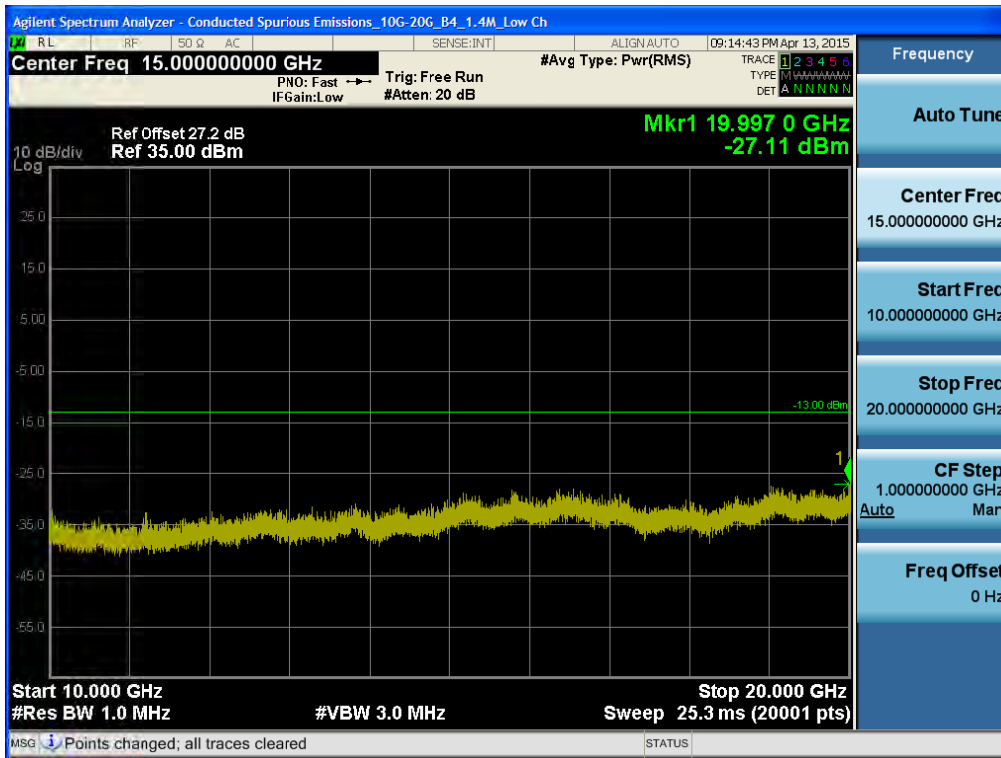


BAND 4. Conducted Spurious Plot\_1 (20175ch\_1.4MHz\_QPSK\_RB 1\_0)

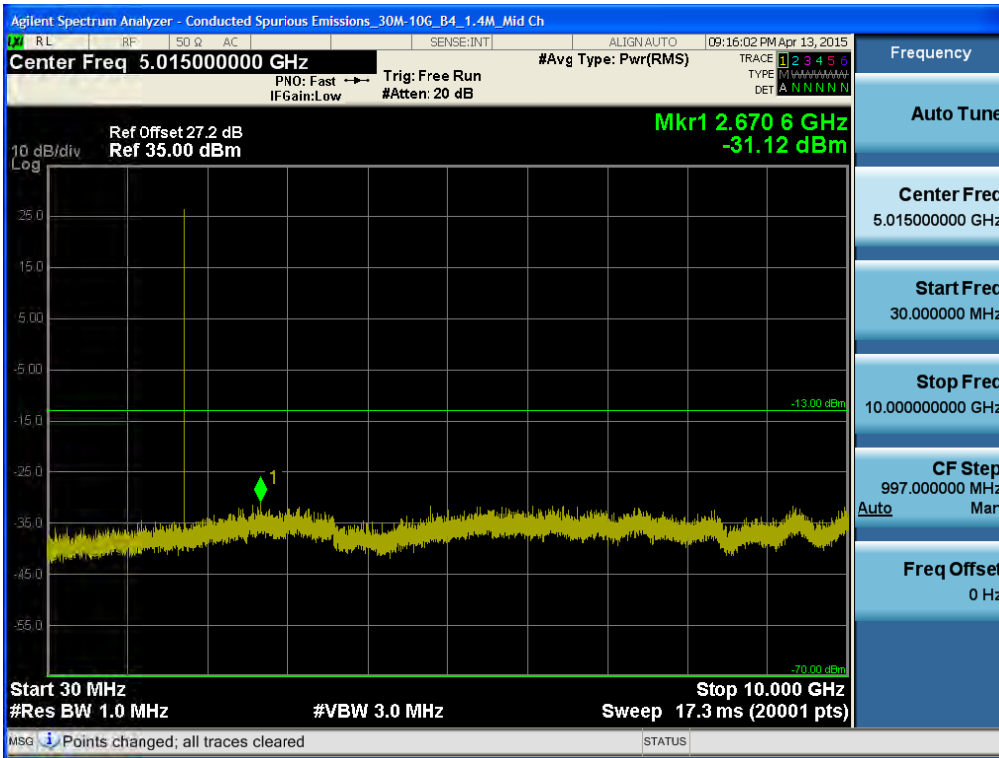


BAND 4. Conducted Spurious Plot\_2 (20175ch\_1.4MHz\_QPSK\_RB 1\_0)

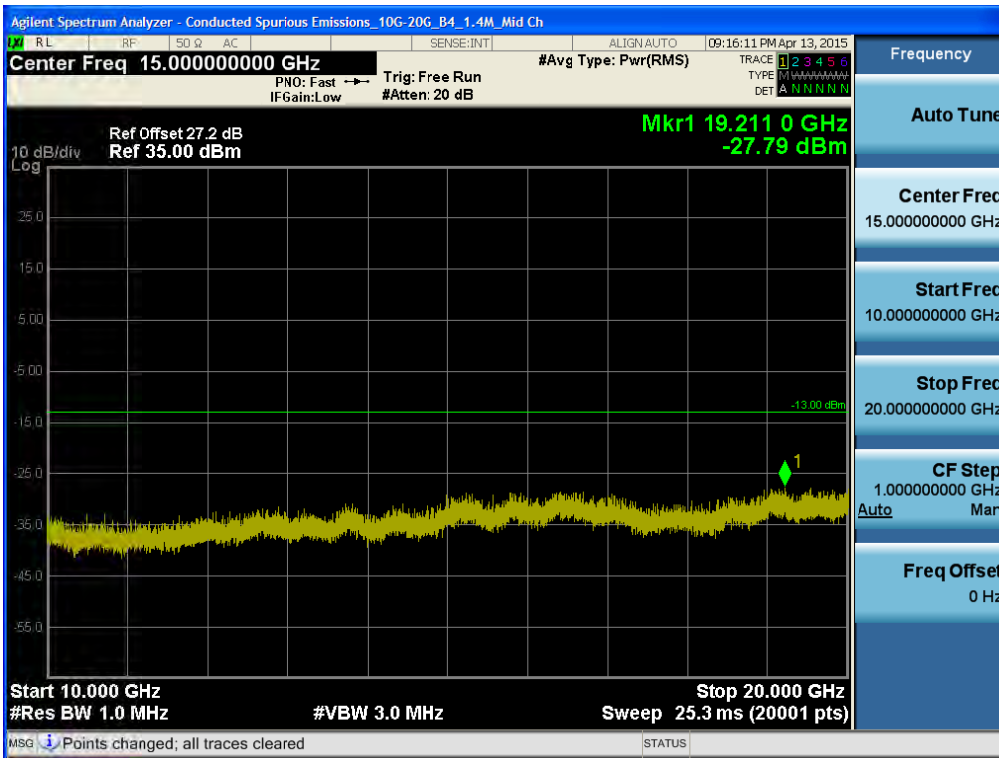


BAND 4. Conducted Spurious Plot\_1 (20393ch\_1.4MHz\_QPSK\_RB 1\_0)

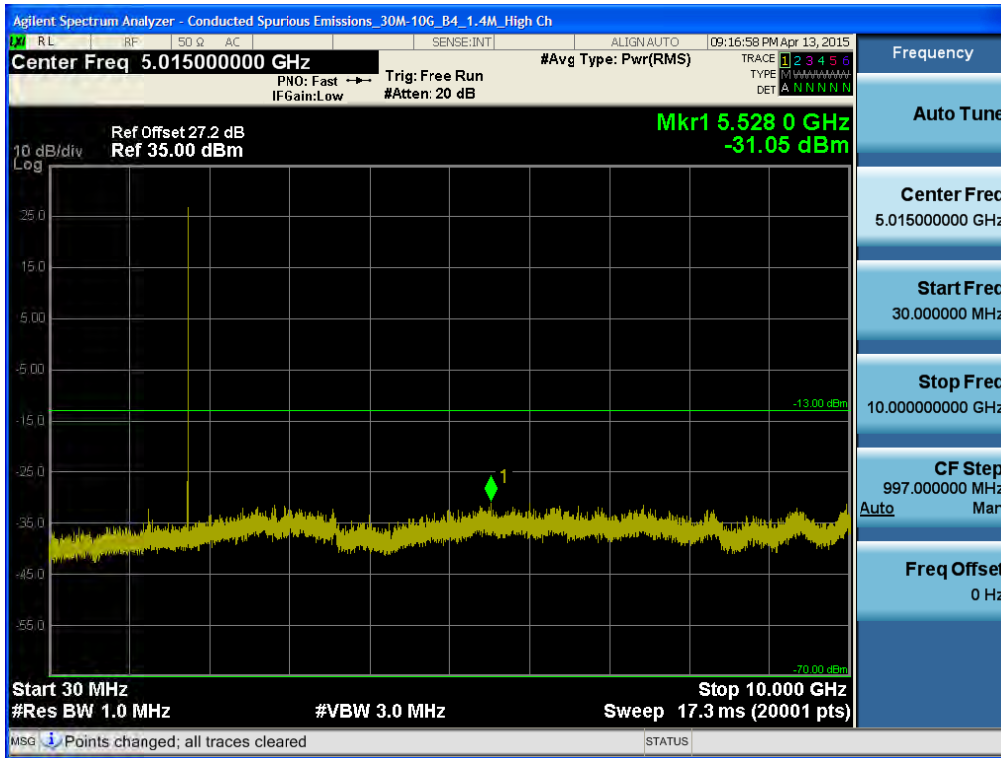


BAND 4. Conducted Spurious Plot\_2 (20393ch\_1.4MHz\_QPSK\_RB 1\_0)

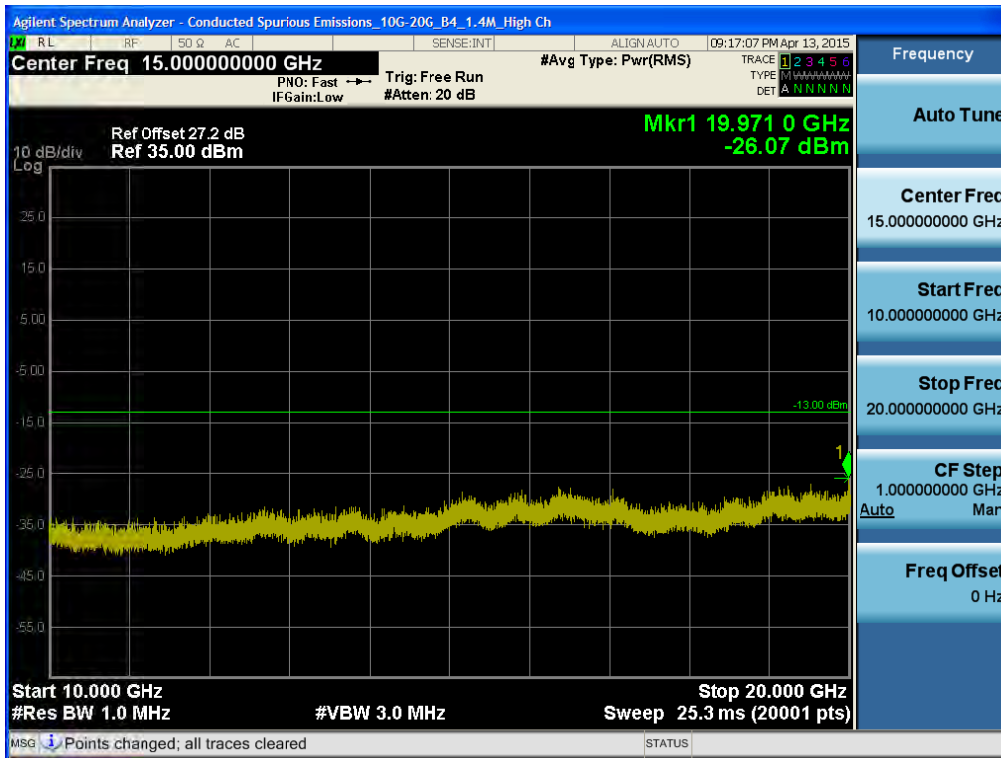


BAND 4. Conducted Spurious Plot\_1 (19965ch\_3MHz\_QPSK\_RB 1\_0)

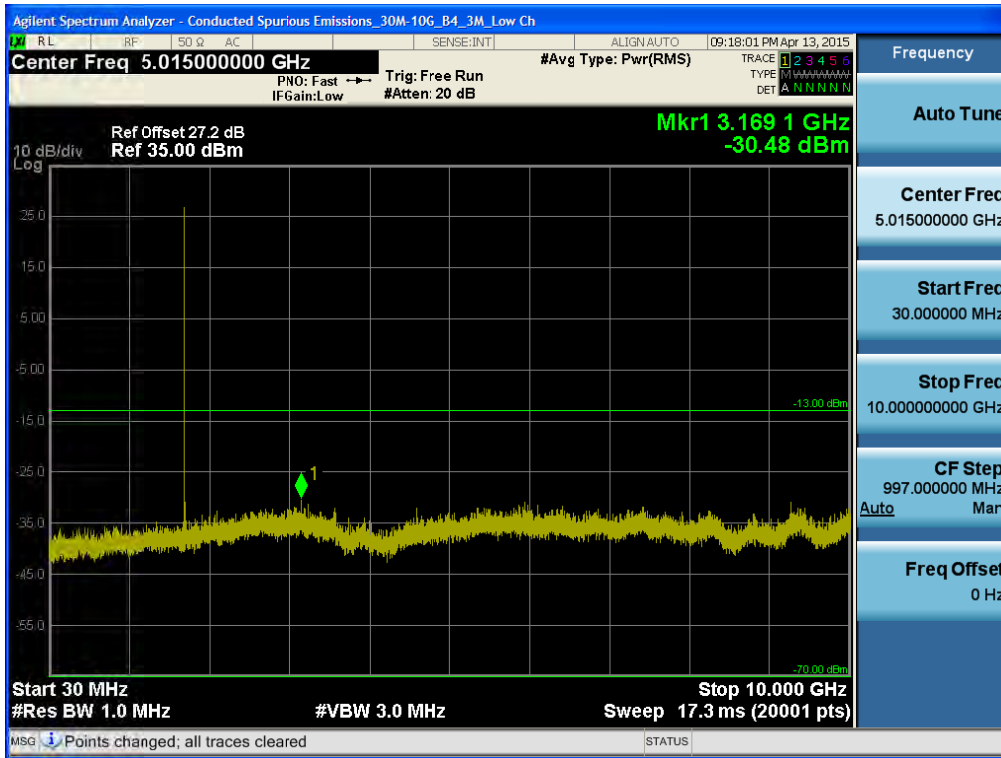


BAND 4. Conducted Spurious Plot\_2 (19965ch\_3MHz\_QPSK\_RB 1\_0)

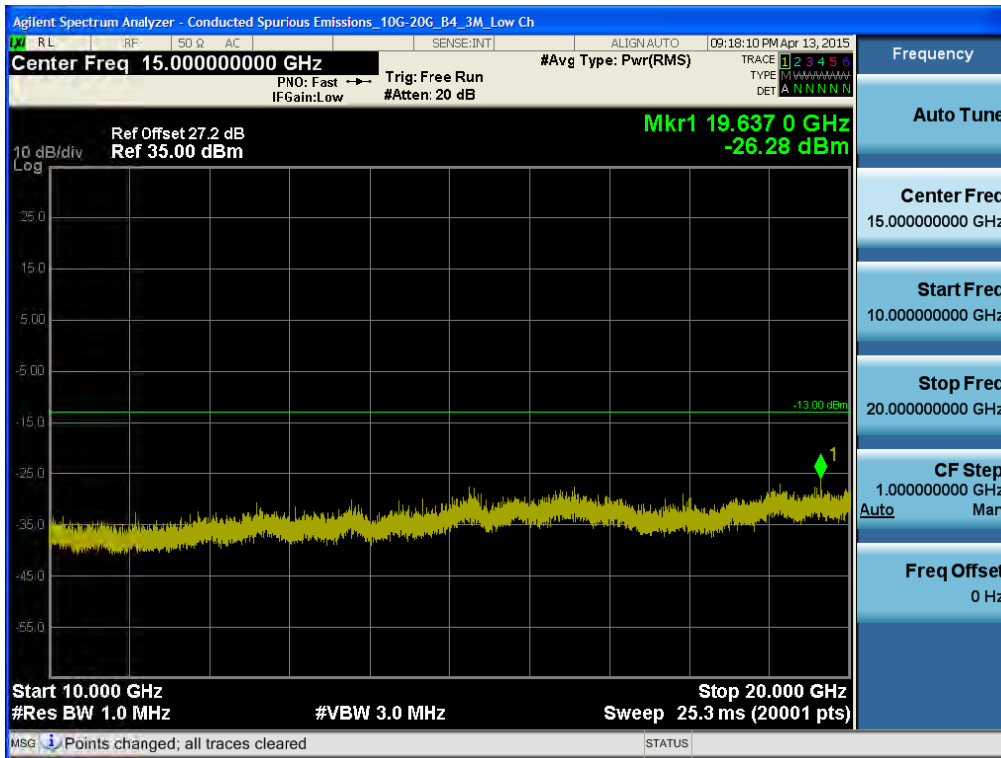


BAND 4. Conducted Spurious Plot\_1 (20175ch\_3MHz\_QPSK\_RB 1\_0)

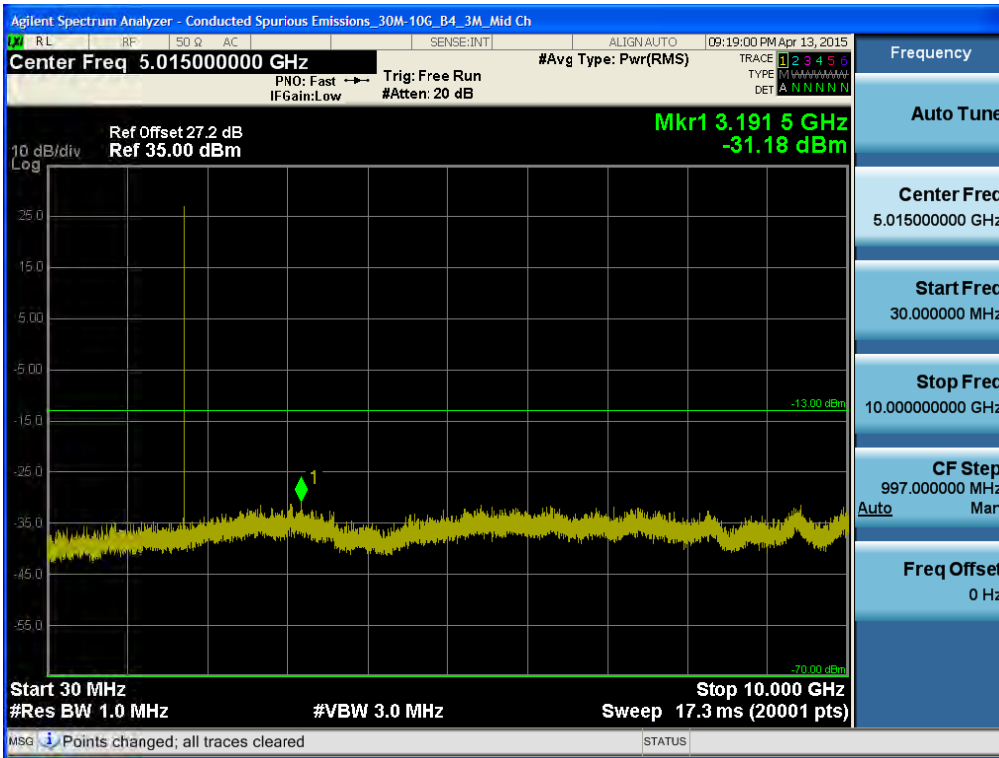


BAND 4. Conducted Spurious Plot\_2 (20175ch\_3MHz\_QPSK\_RB 1\_0)

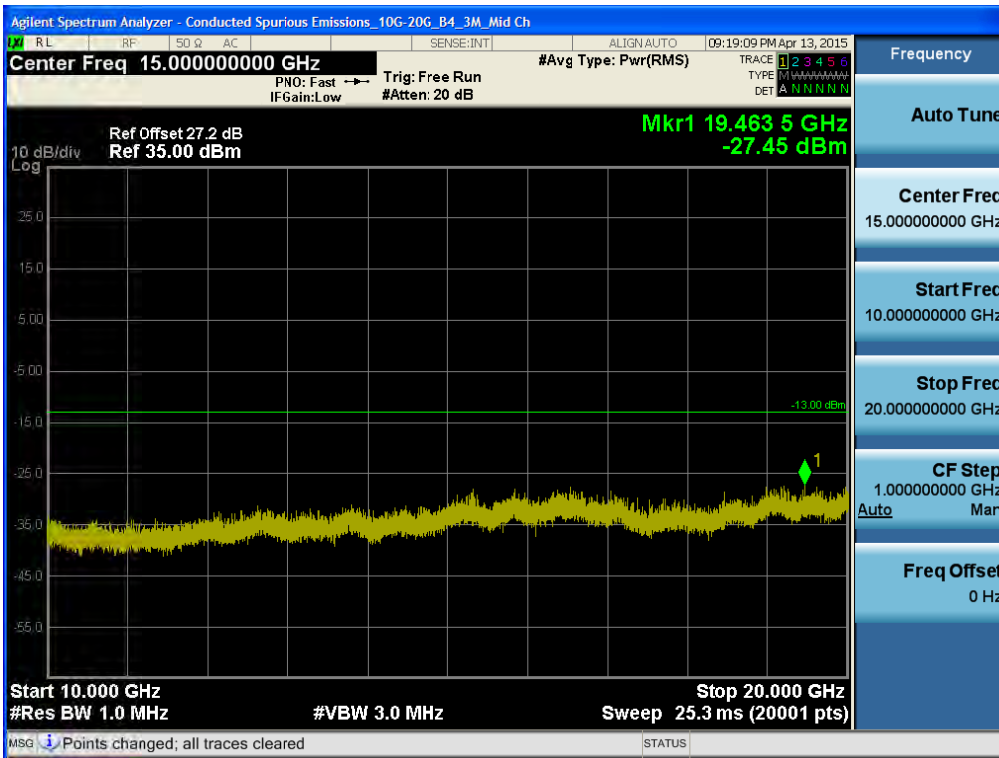


BAND 4. Conducted Spurious Plot\_1 (20385ch\_3MHz\_QPSK\_RB 1\_0)

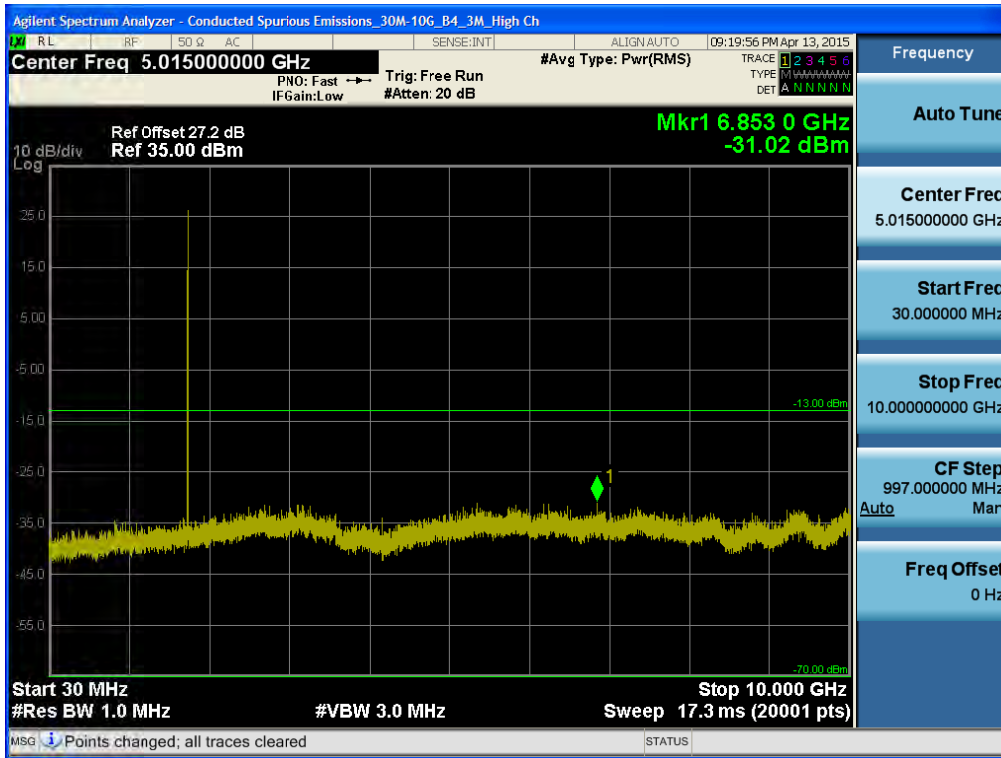


BAND 4. Conducted Spurious Plot\_2 (20385ch\_3MHz\_QPSK\_RB 1\_0)

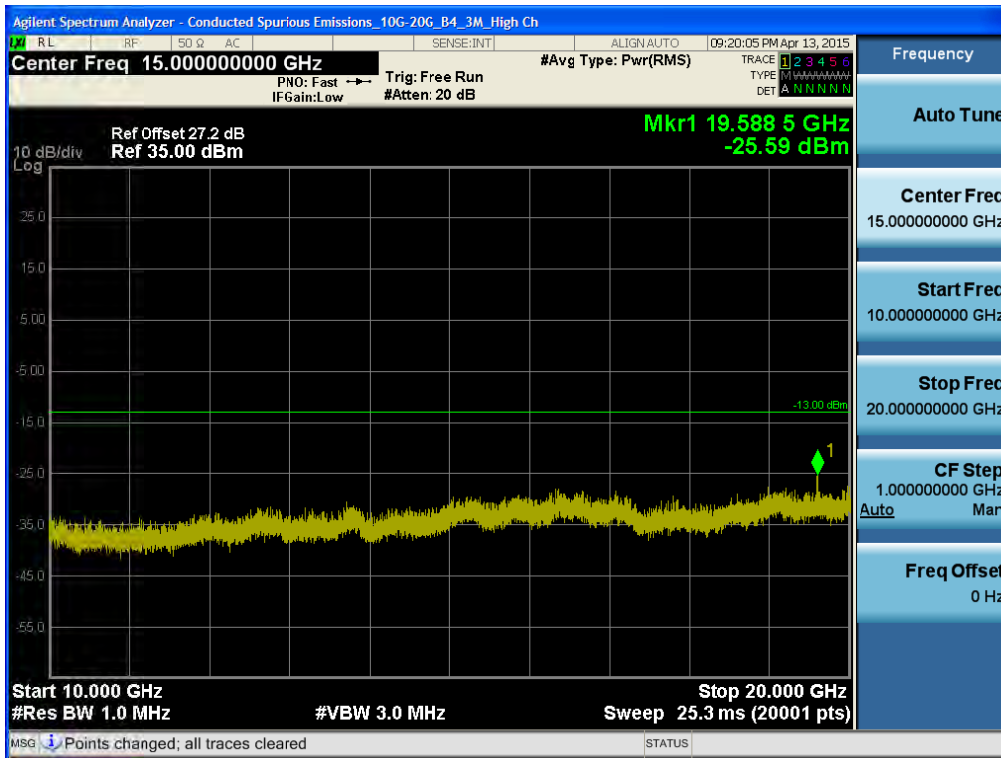


BAND 4. Conducted Spurious Plot\_1 (19975ch\_5MHz\_QPSK\_RB 1\_0)

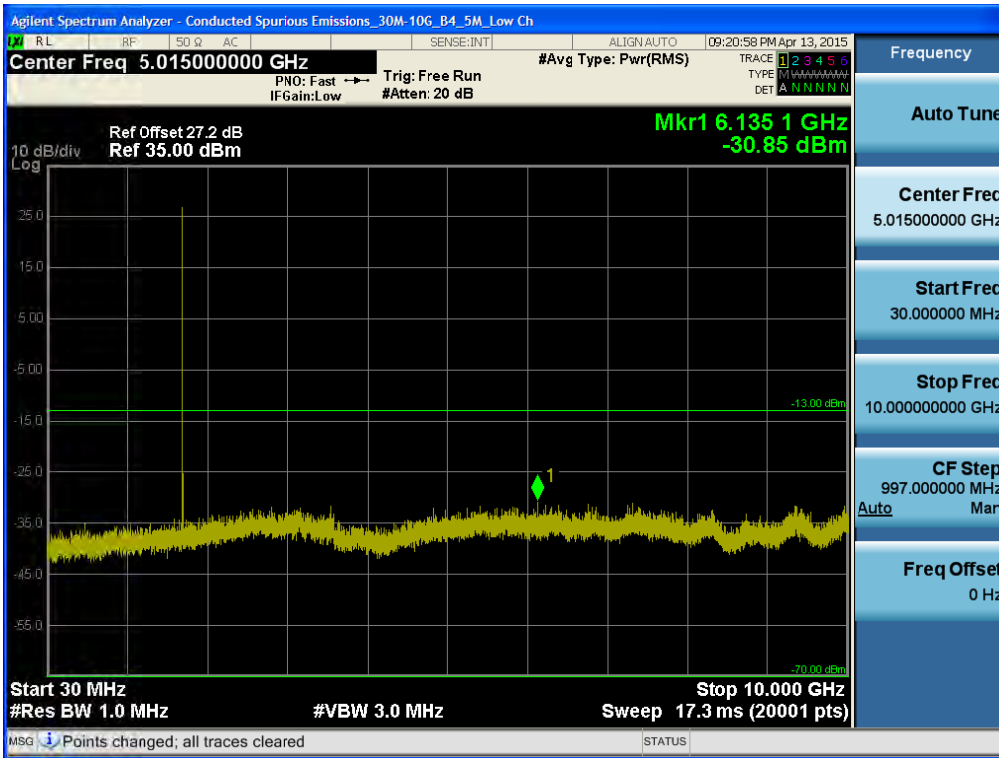


BAND 4. Conducted Spurious Plot\_2 (19975ch\_5MHz\_QPSK\_RB 1\_0)

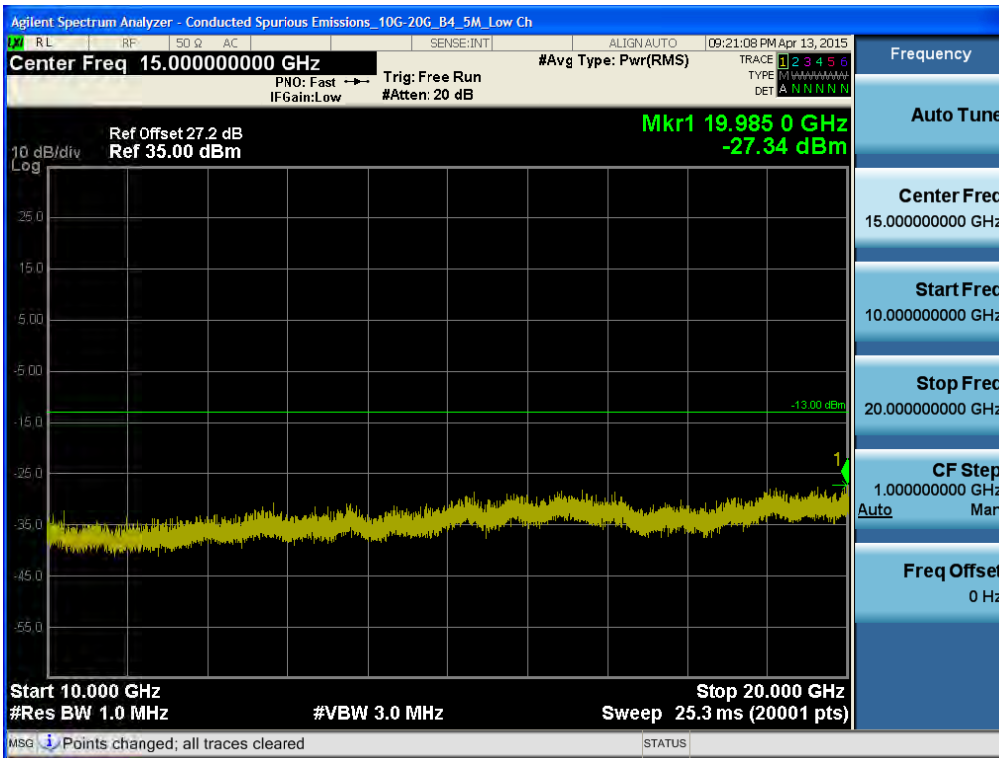


BAND 4. Conducted Spurious Plot\_1 (20175ch\_5MHz\_QPSK\_RB 1\_0)

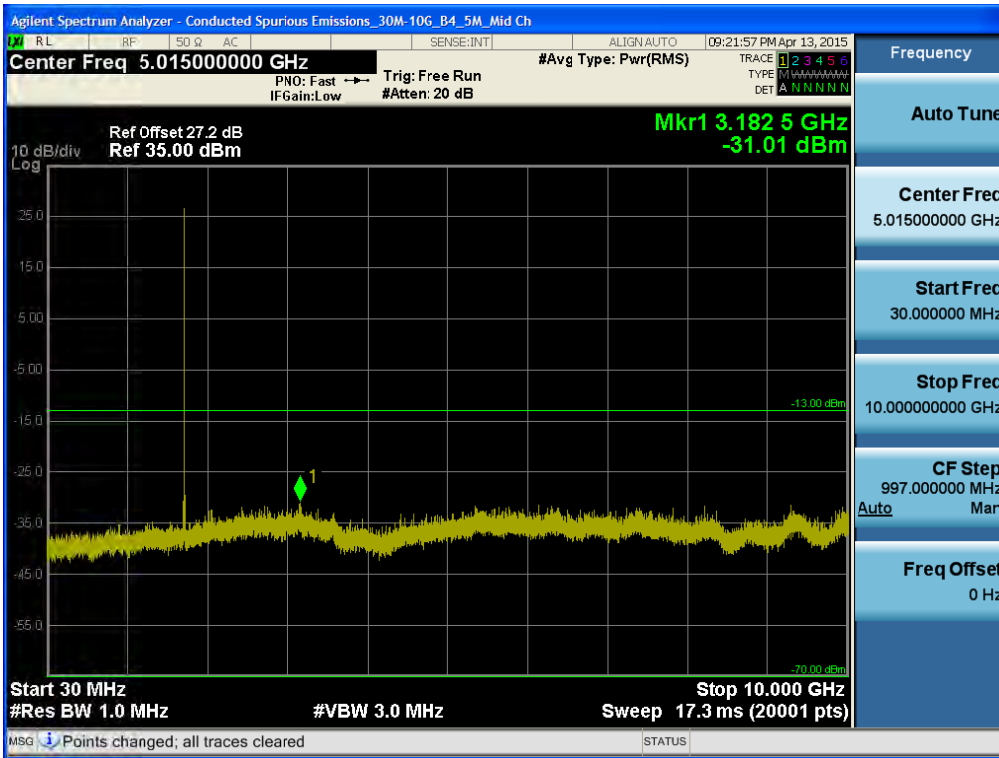


BAND 4. Conducted Spurious Plot\_2 (20175ch\_5MHz\_QPSK\_RB 1\_0)

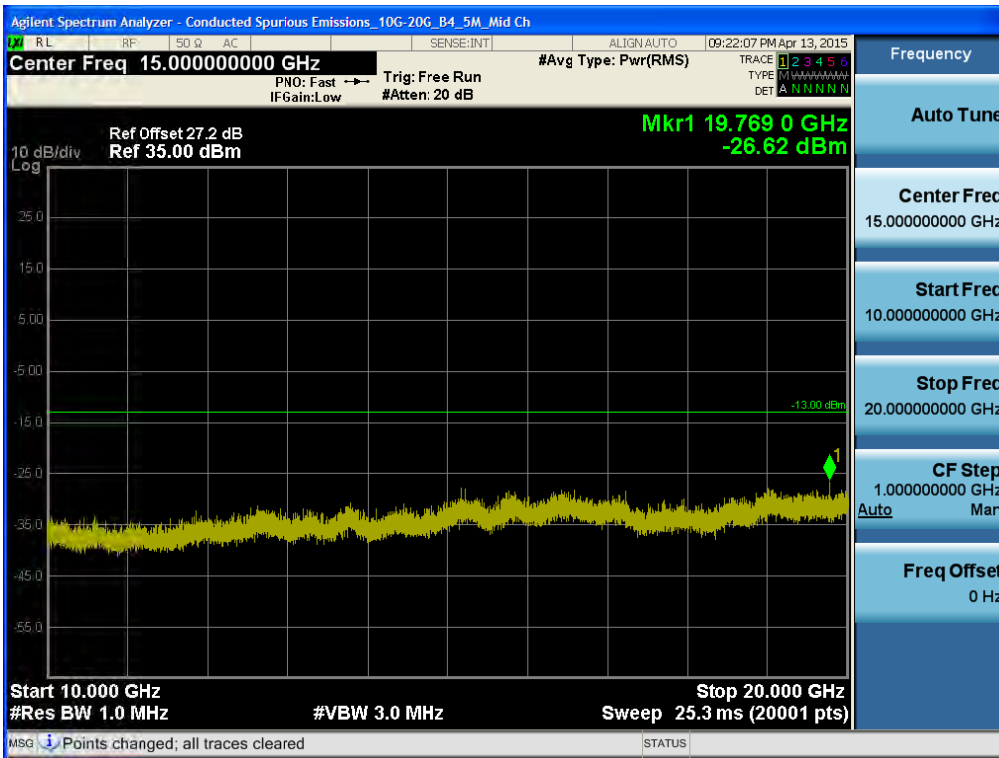


BAND 4. Conducted Spurious Plot\_1 (20375ch\_5MHz\_QPSK\_RB 1\_0)

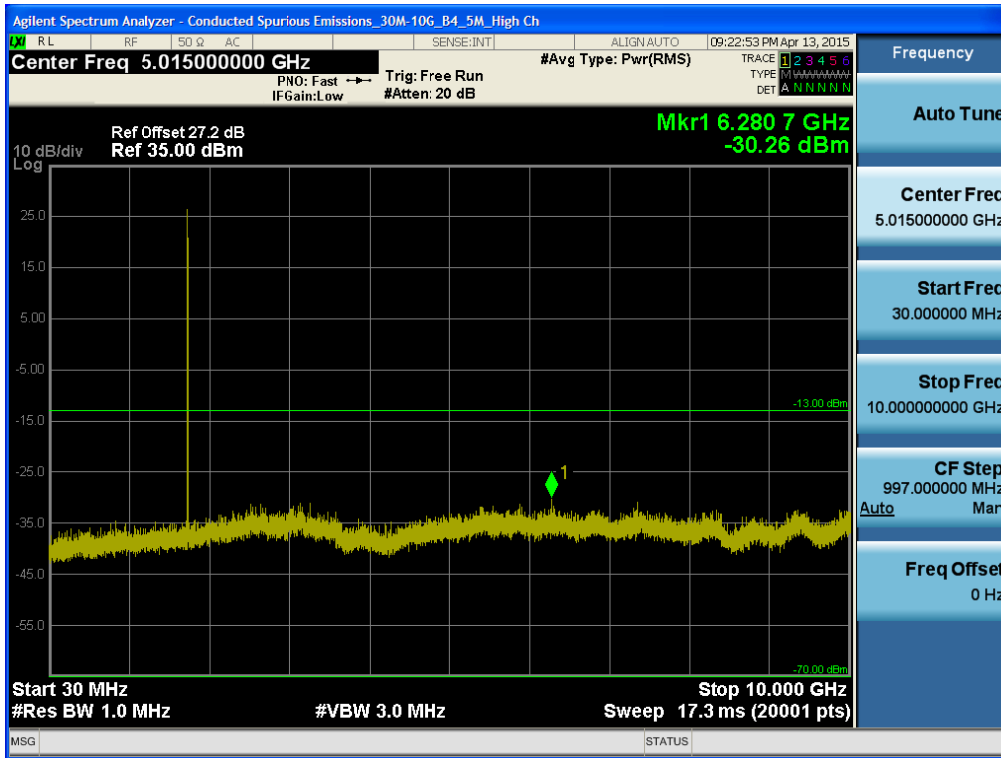


BAND 4. Conducted Spurious Plot\_2 (20375ch\_5MHz\_QPSK\_RB 1\_0)

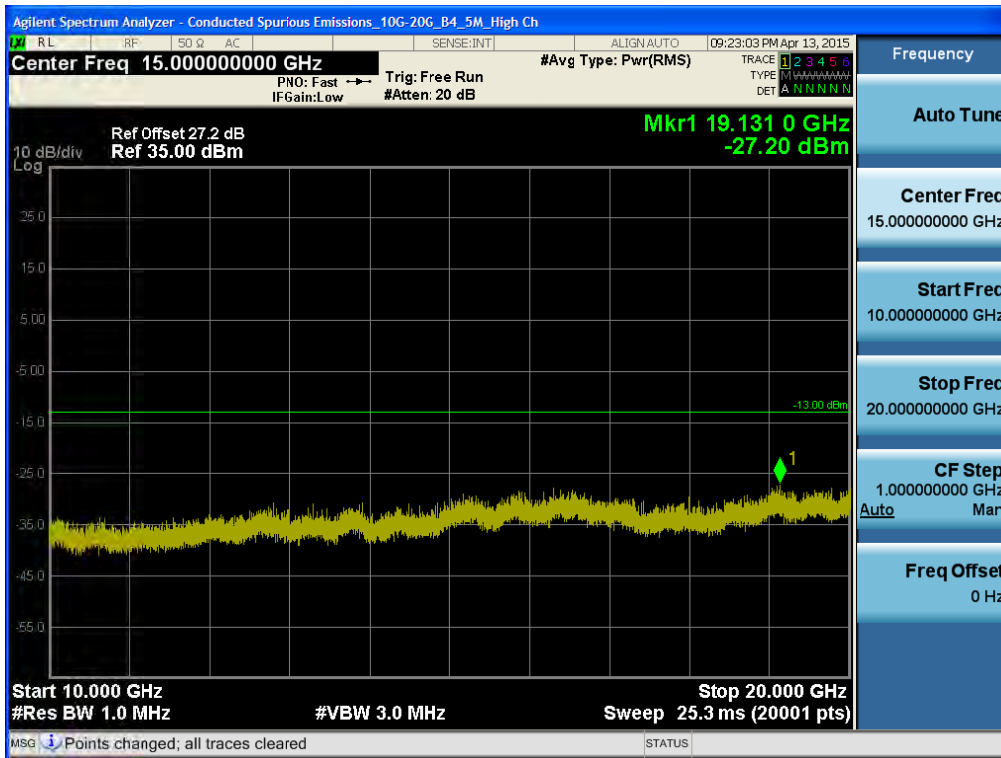


BAND 4. Conducted Spurious Plot\_1 (20000ch\_10MHz\_QPSK\_RB 1\_0)

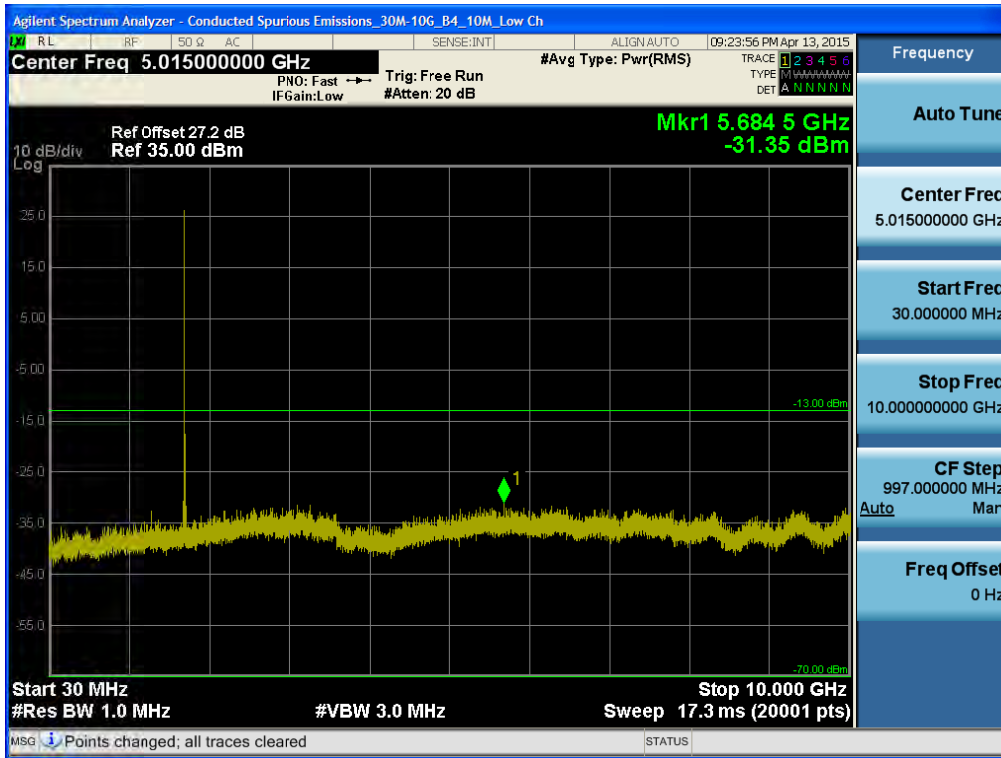


BAND 4. Conducted Spurious Plot\_2 (20000ch\_10MHz\_QPSK\_RB 1\_0)

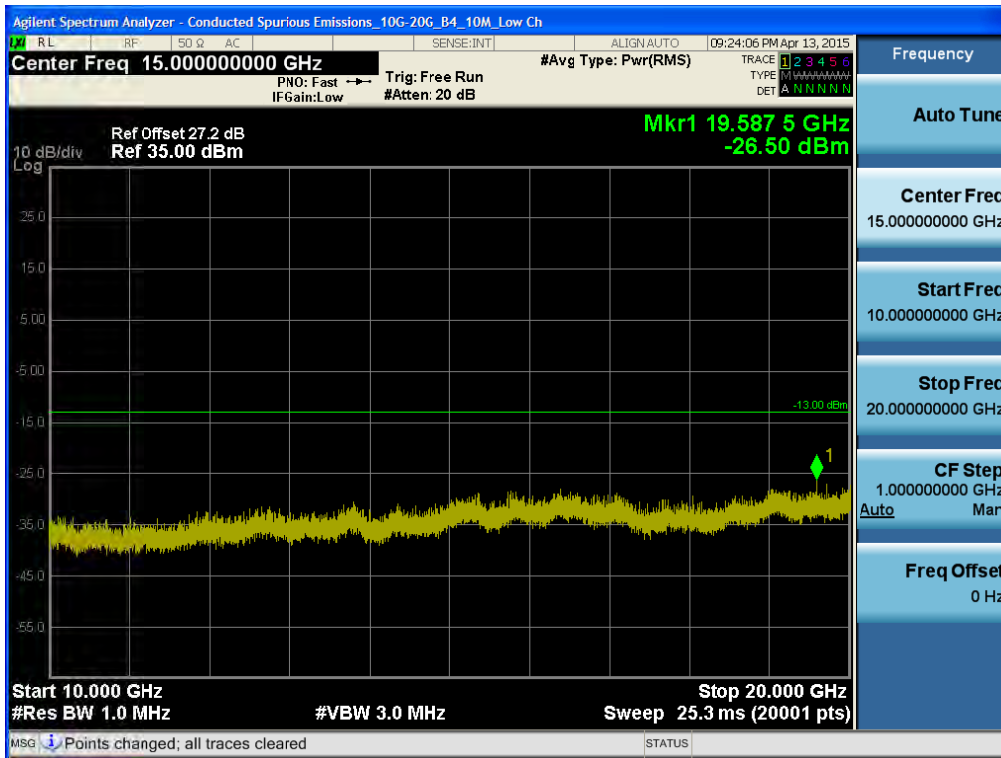


BAND 4. Conducted Spurious Plot\_1 (20175ch\_10MHz\_QPSK\_RB 1\_0)

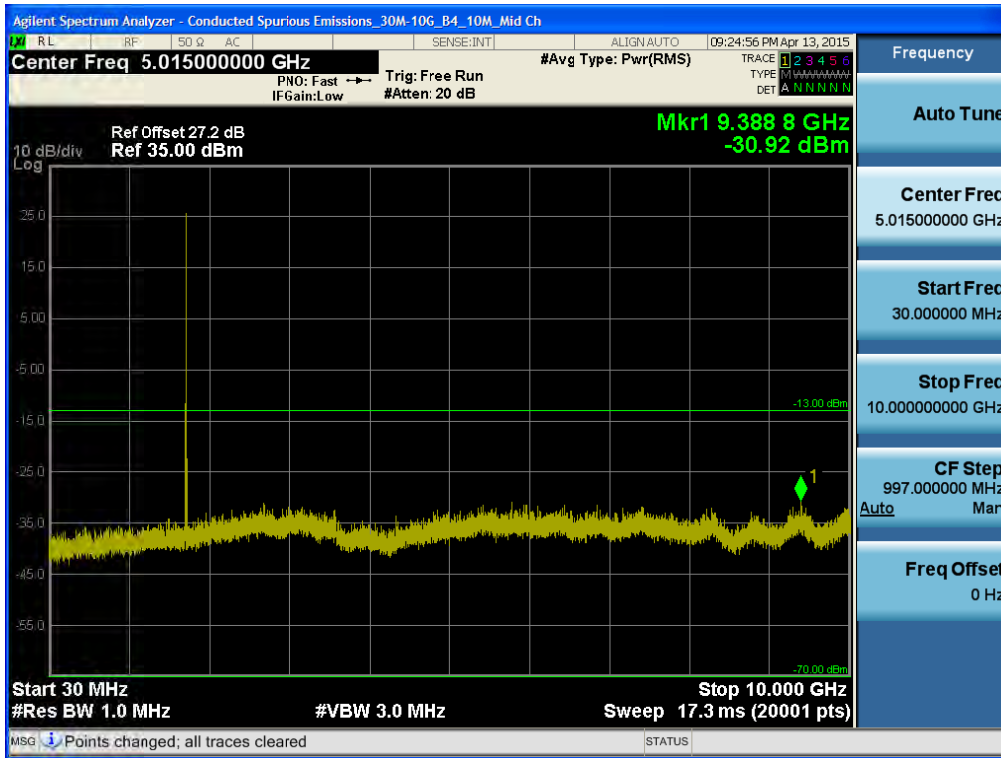


BAND 4. Conducted Spurious Plot\_2 (20175ch\_10MHz\_QPSK\_RB 1\_0)

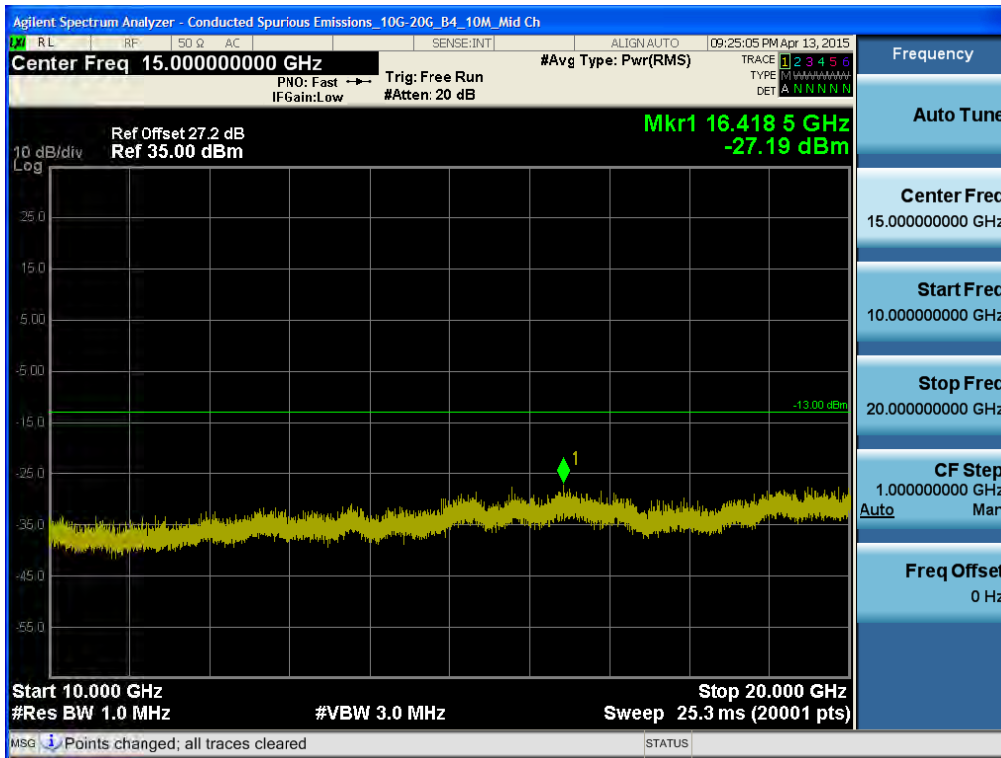


BAND 4. Conducted Spurious Plot\_1 (20350ch\_10MHz\_QPSK\_RB 1\_0)

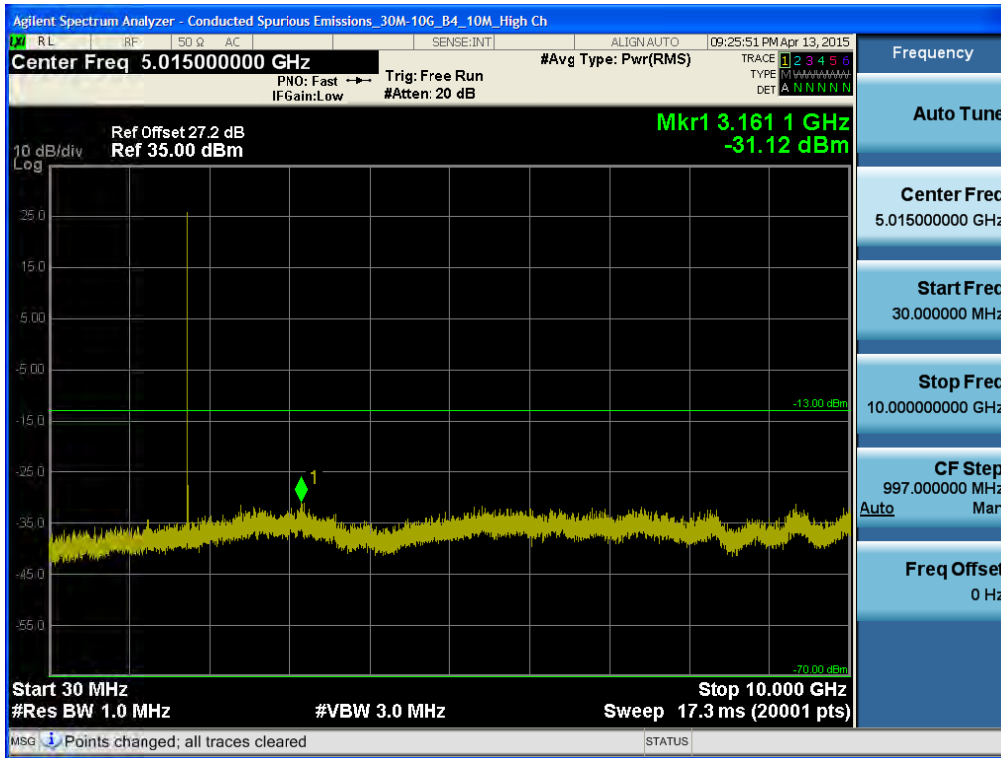


BAND 4. Conducted Spurious Plot\_2 (20350ch\_10MHz\_QPSK\_RB 1\_0)

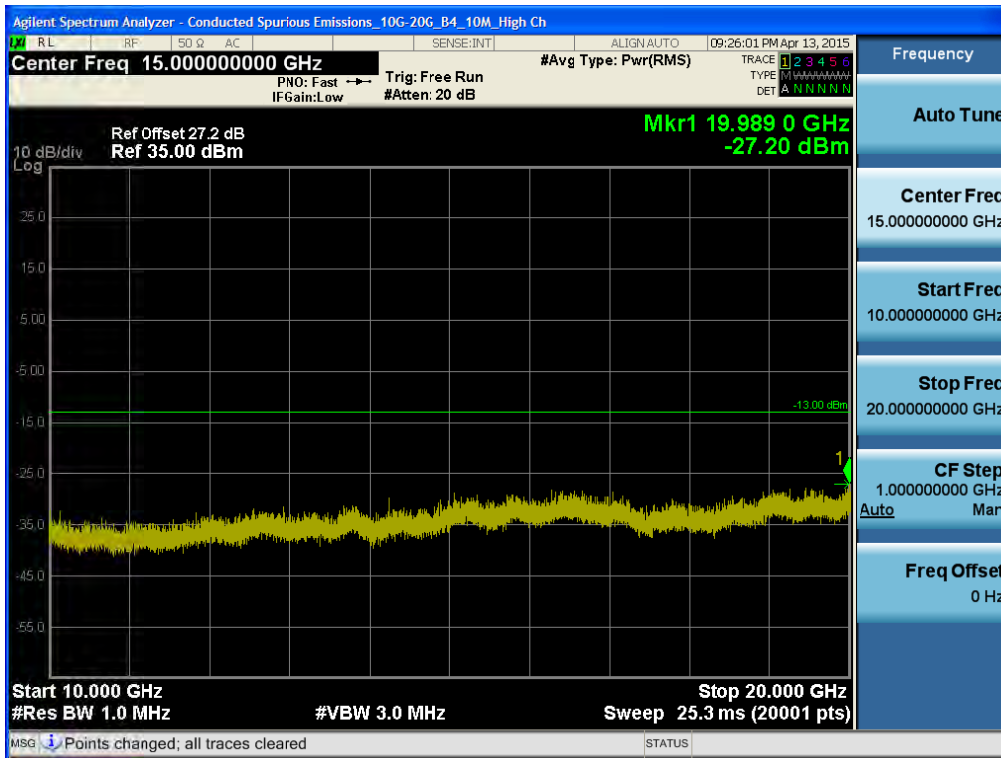


BAND 4. Conducted Spurious Plot\_1 (20025ch\_15MHz\_QPSK\_RB 1\_0)

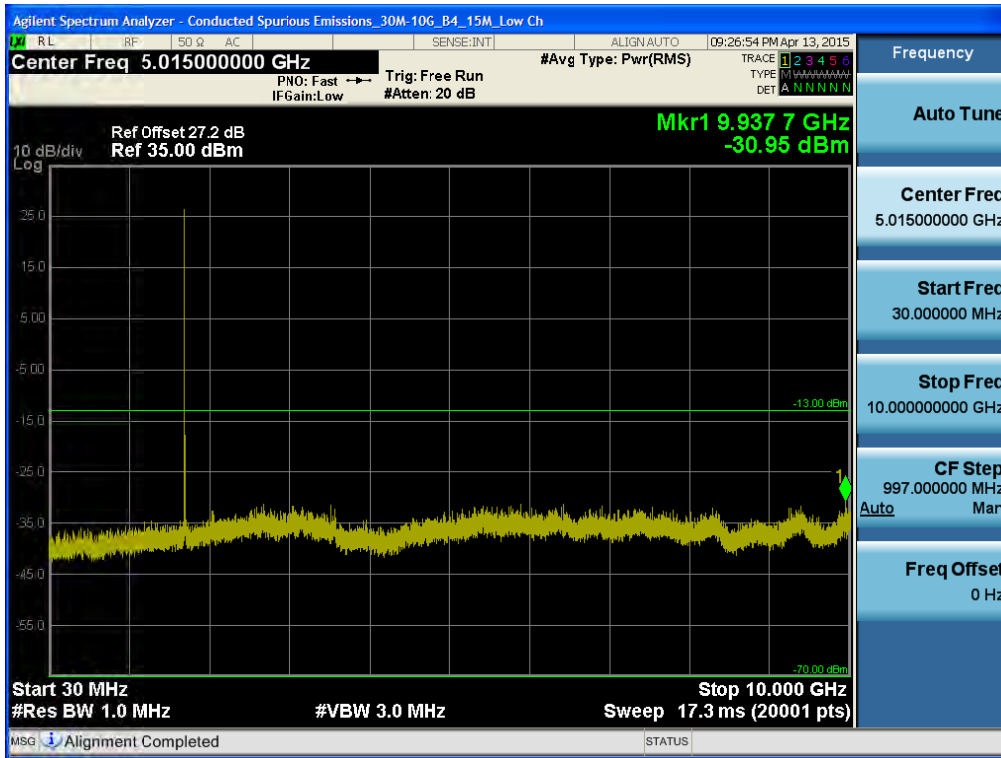


BAND 4. Conducted Spurious Plot\_2 (20025ch\_15MHz\_QPSK\_RB 1\_0)

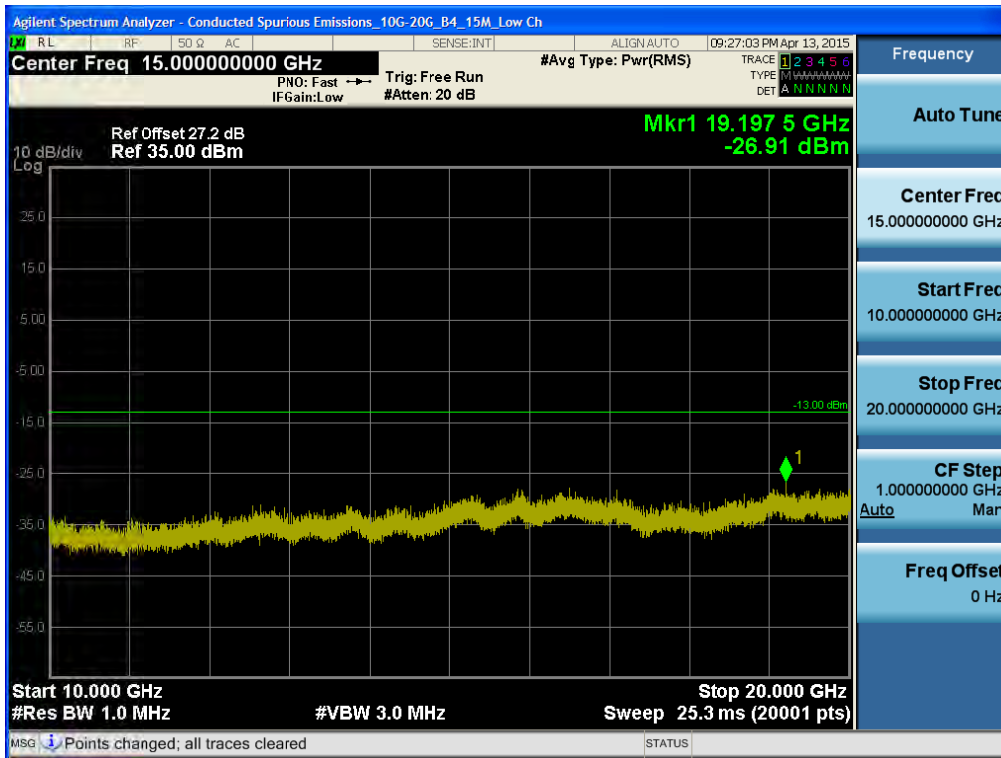


BAND 4. Conducted Spurious Plot\_1 (20175ch\_15MHz\_QPSK\_RB 1\_0)

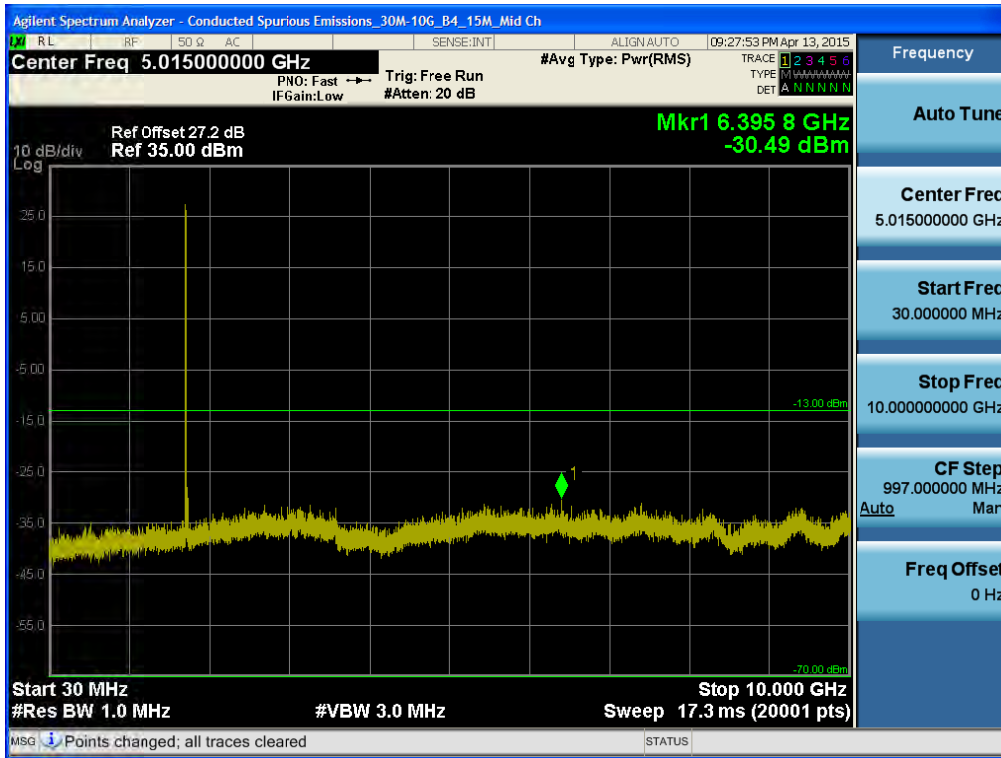


BAND 4. Conducted Spurious Plot\_2 (20175ch\_15MHz\_QPSK\_RB 1\_0)

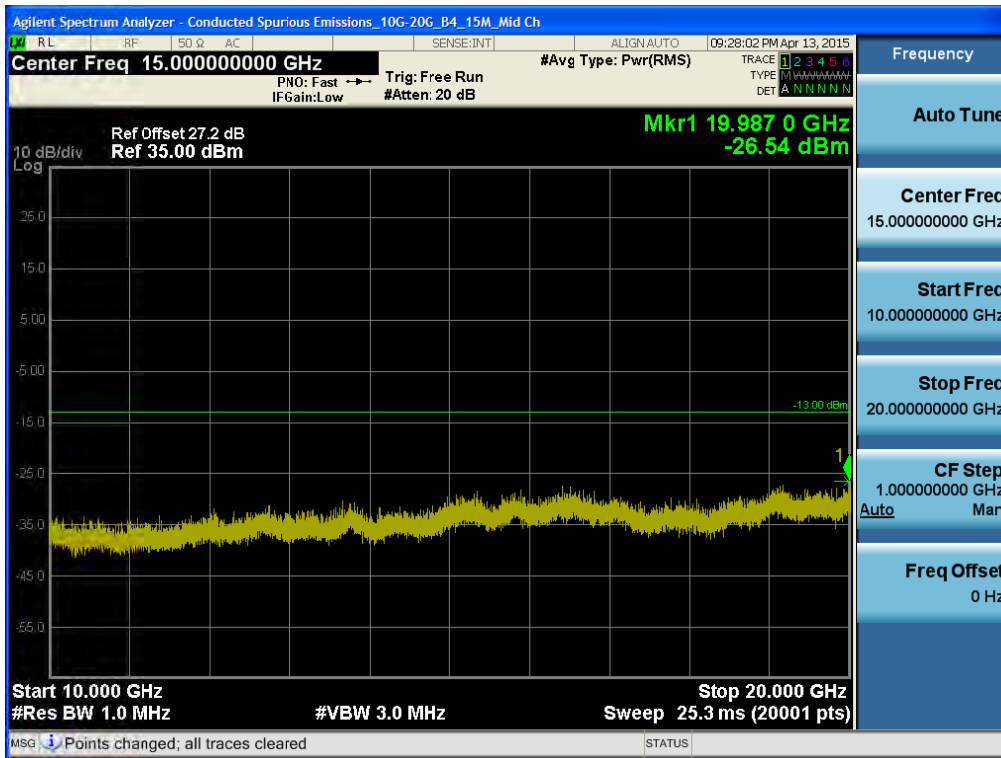


BAND 4. Conducted Spurious Plot\_1 (20325ch\_15MHz\_QPSK\_RB 1\_0)

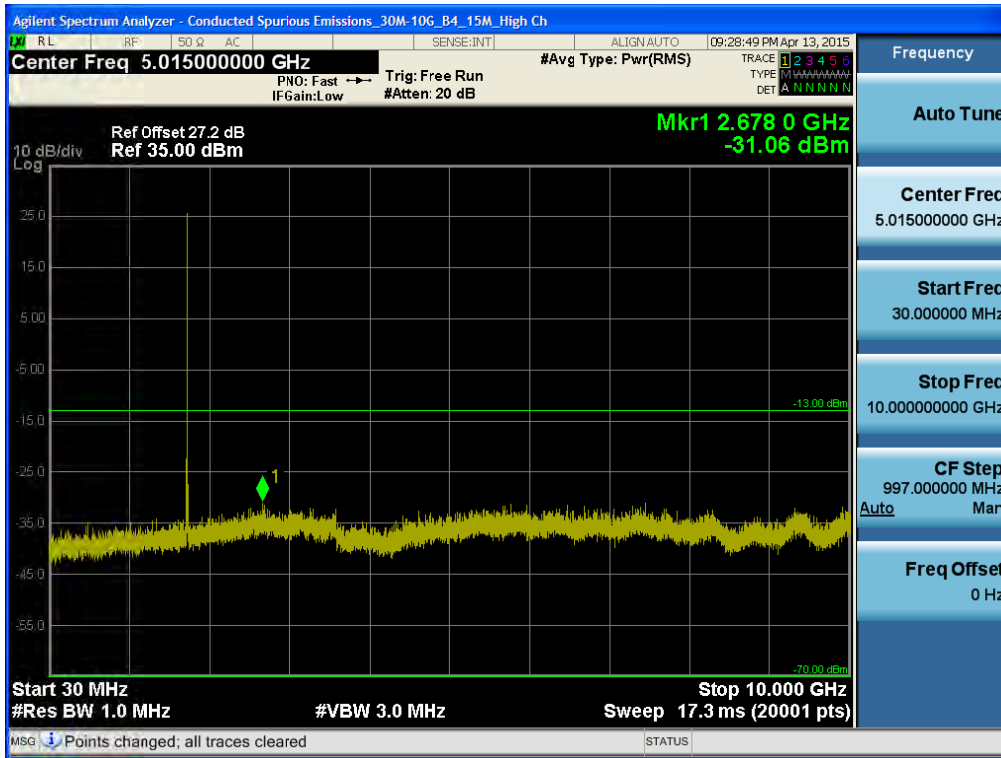


BAND 4. Conducted Spurious Plot\_2 (20325ch\_15MHz\_QPSK\_RB 1\_0)

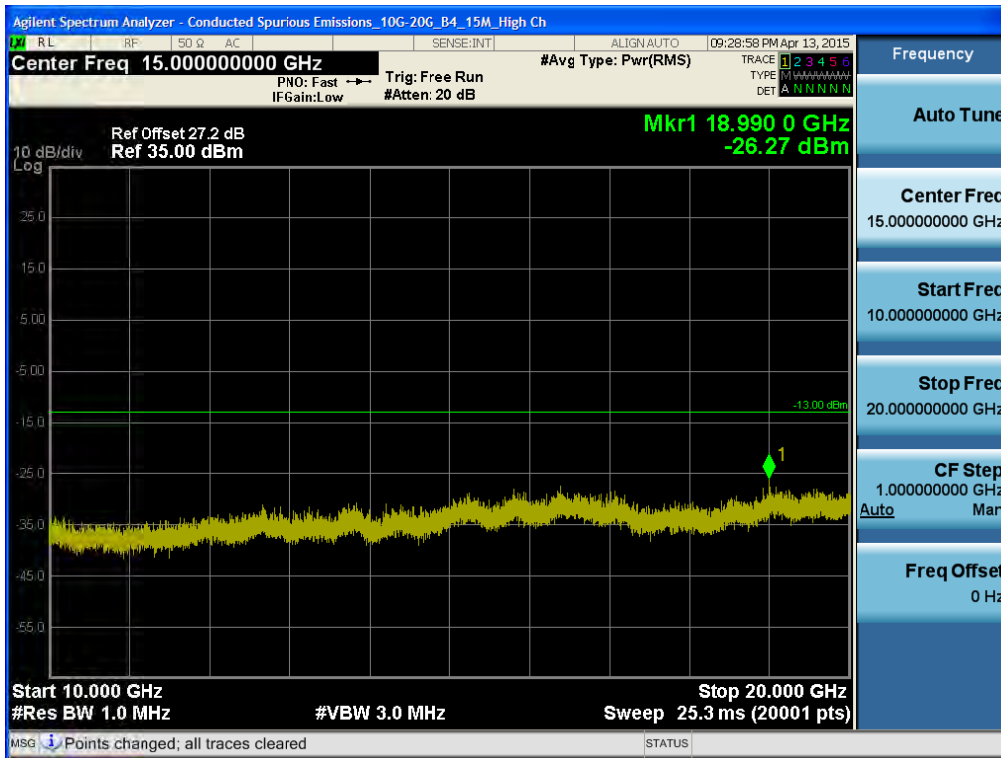


BAND 4. Conducted Spurious Plot\_1 (20050ch\_20MHz\_QPSK\_RB 1\_0)

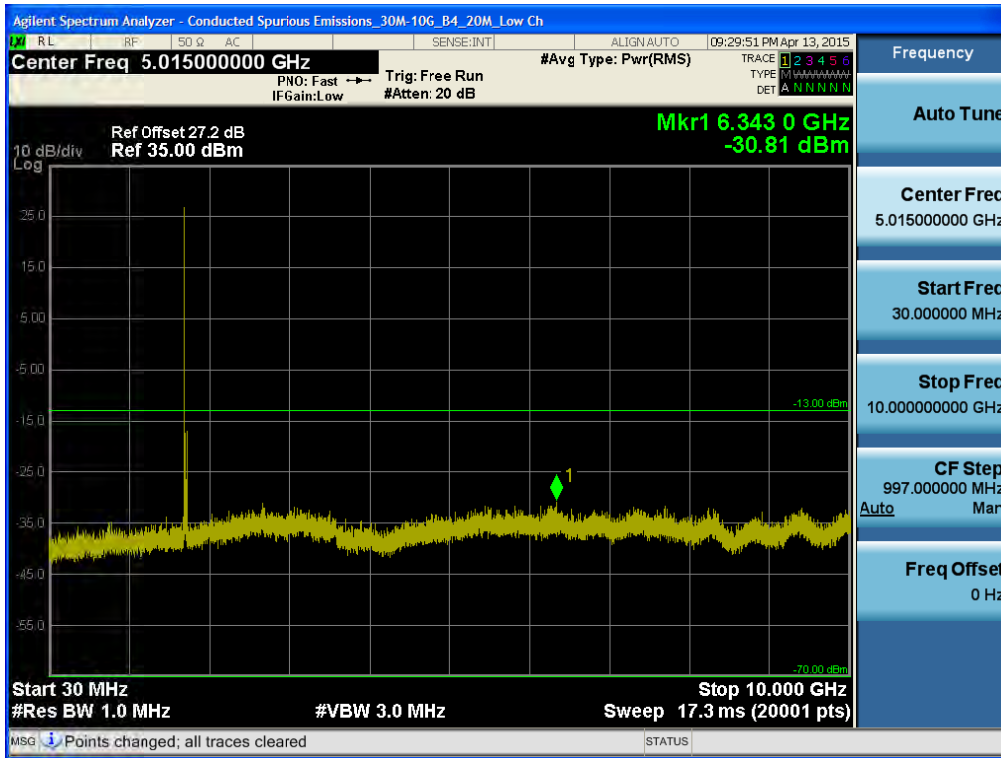


BAND 4. Conducted Spurious Plot\_2 (20050ch\_20MHz\_QPSK\_RB 1\_0)

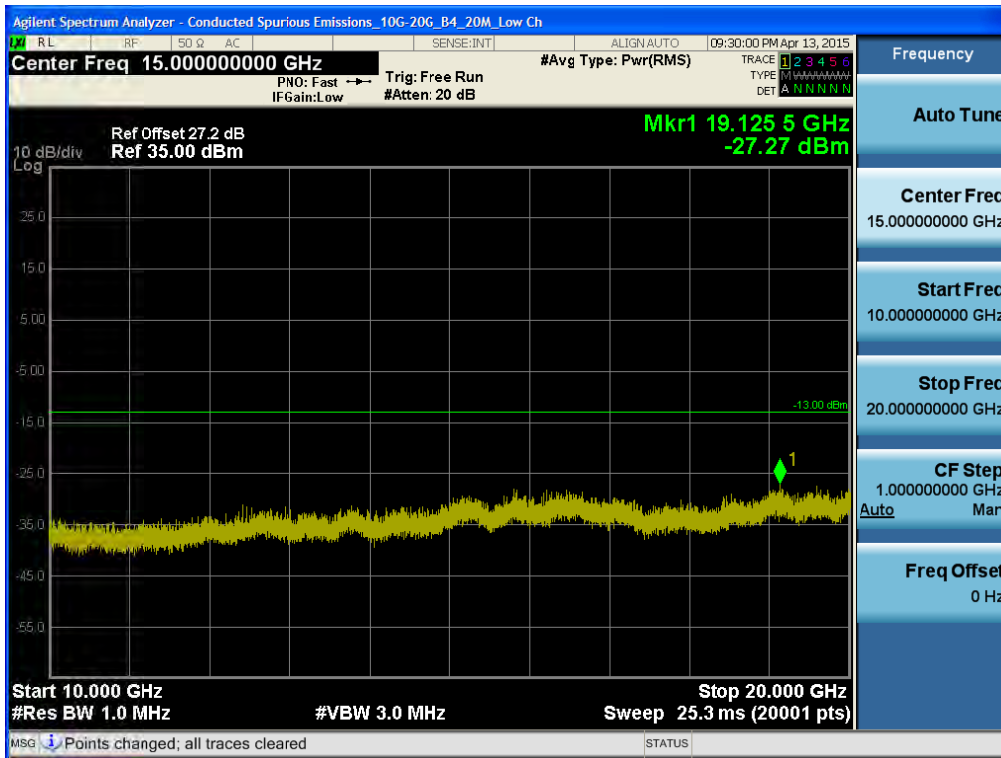


BAND 4. Conducted Spurious Plot\_1 (20175ch\_20MHz\_QPSK\_RB 1\_0)

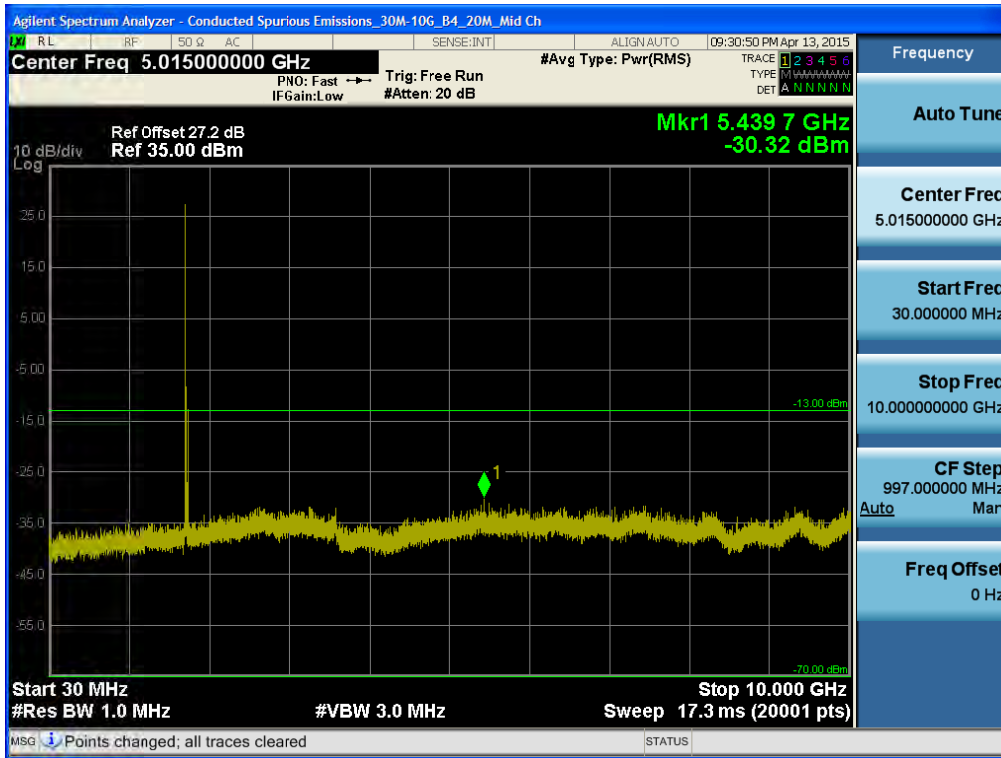

BAND 4. Conducted Spurious Plot\_2 (20175ch\_20MHz\_QPSK\_RB 1\_0)

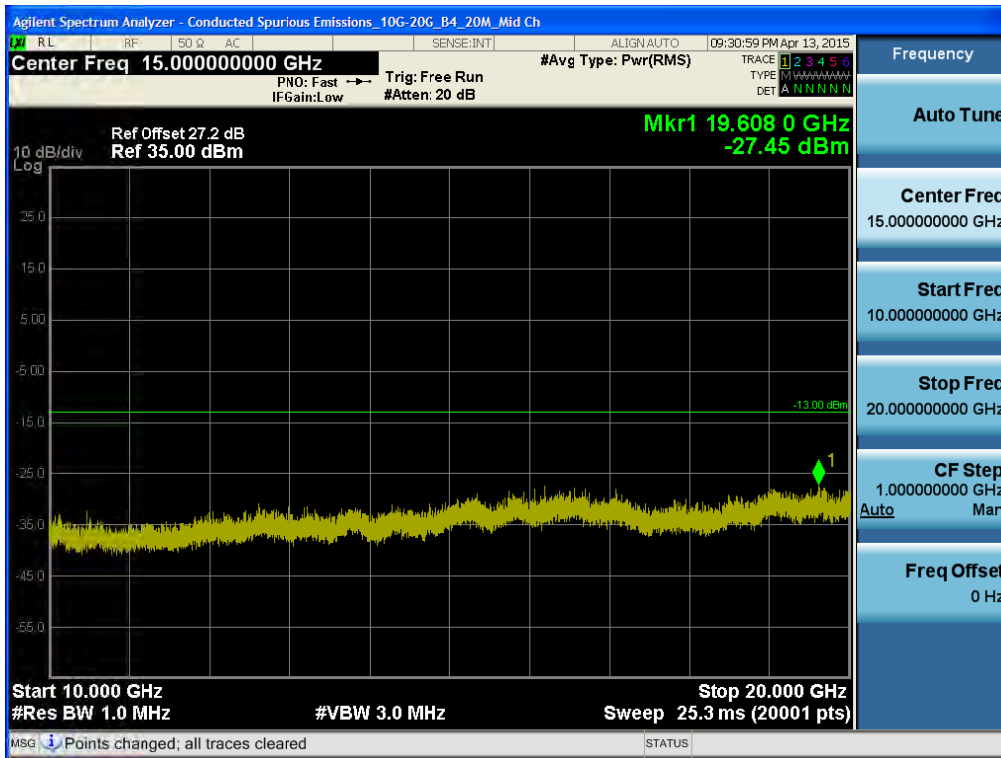

BAND 4. Conducted Spurious Plot\_1 (20300ch\_20MHz\_QPSK\_RB 1\_0)

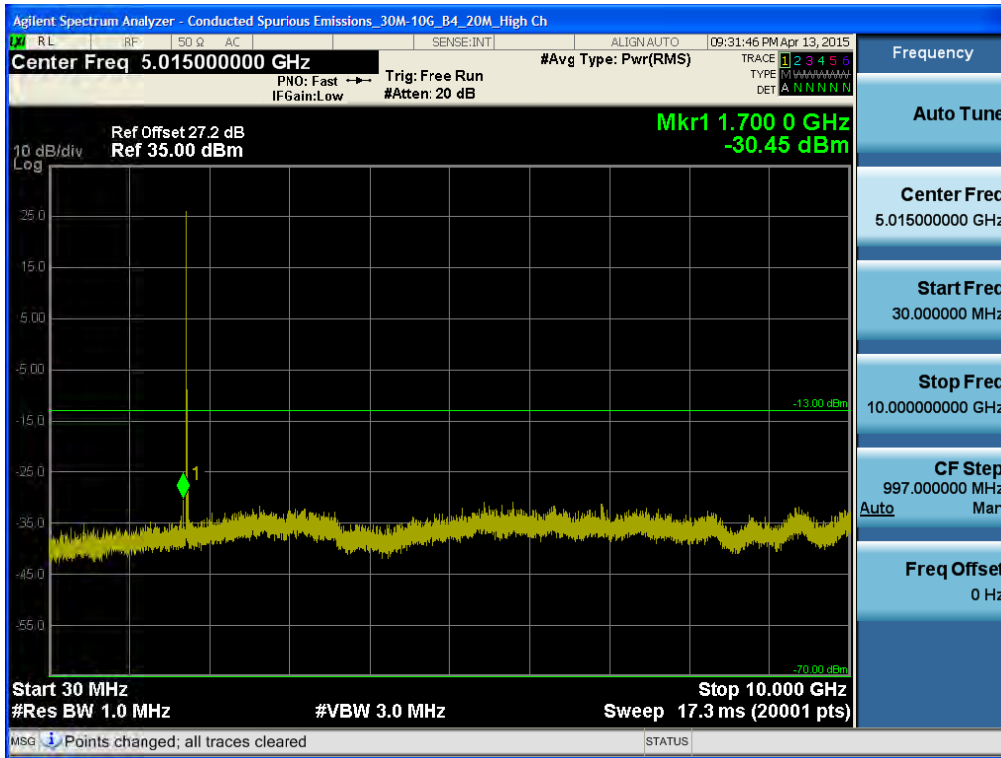

BAND 4. Conducted Spurious Plot\_2 (20300ch\_20MHz\_QPSK\_RB 1\_0)

