


23 GHz ~ 25 GHz

Conducted Spurious Emission (High-CH 39)

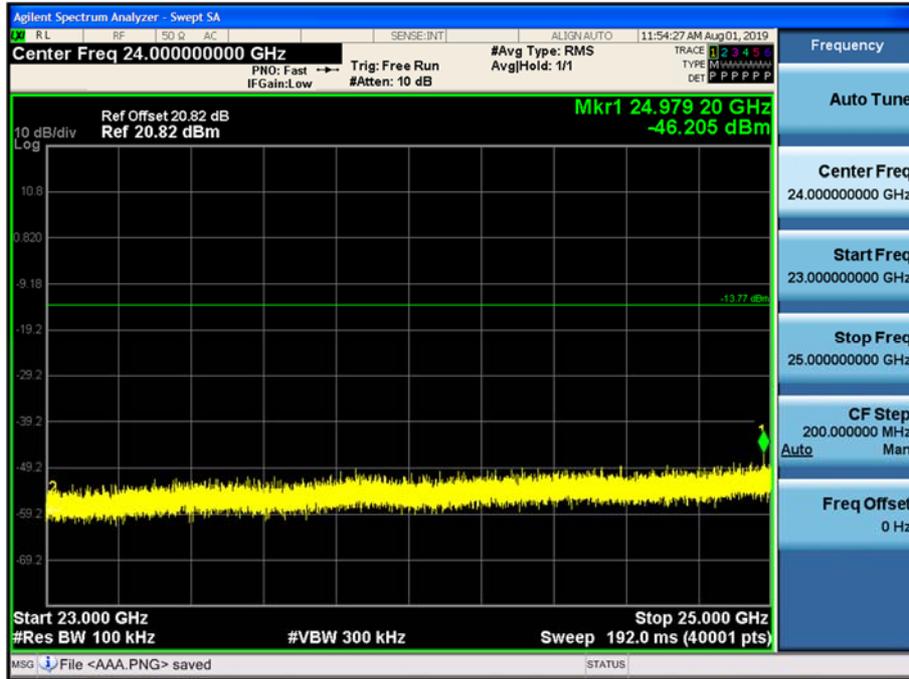


5.0 LE: 2M PHY Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39

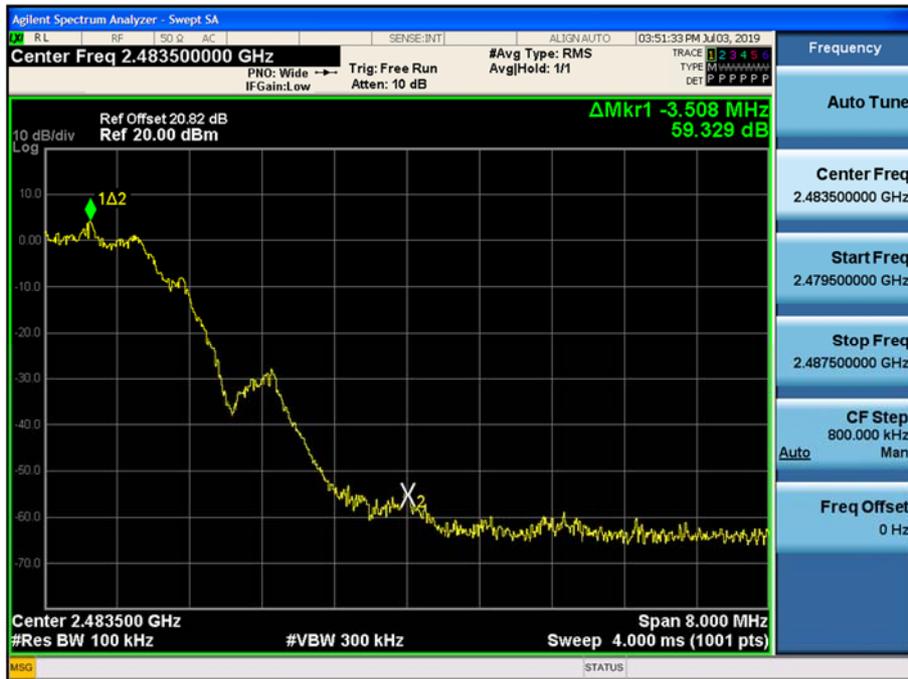

5.0 LE: 1M PHY Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (High-CH 39)

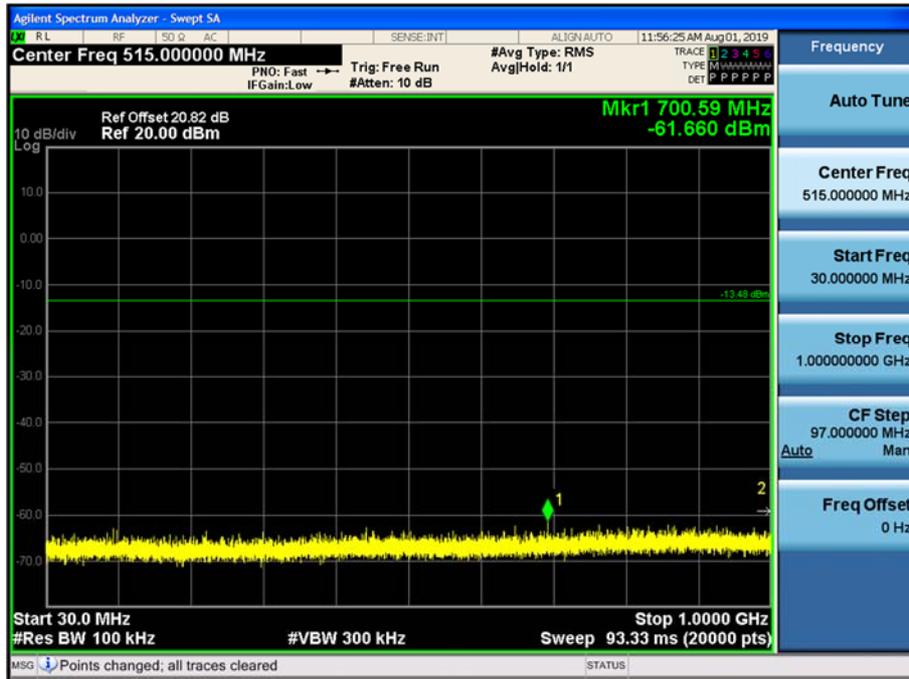


1 GHz ~ 3 GHz

Conducted Spurious Emission (High-CH 39)

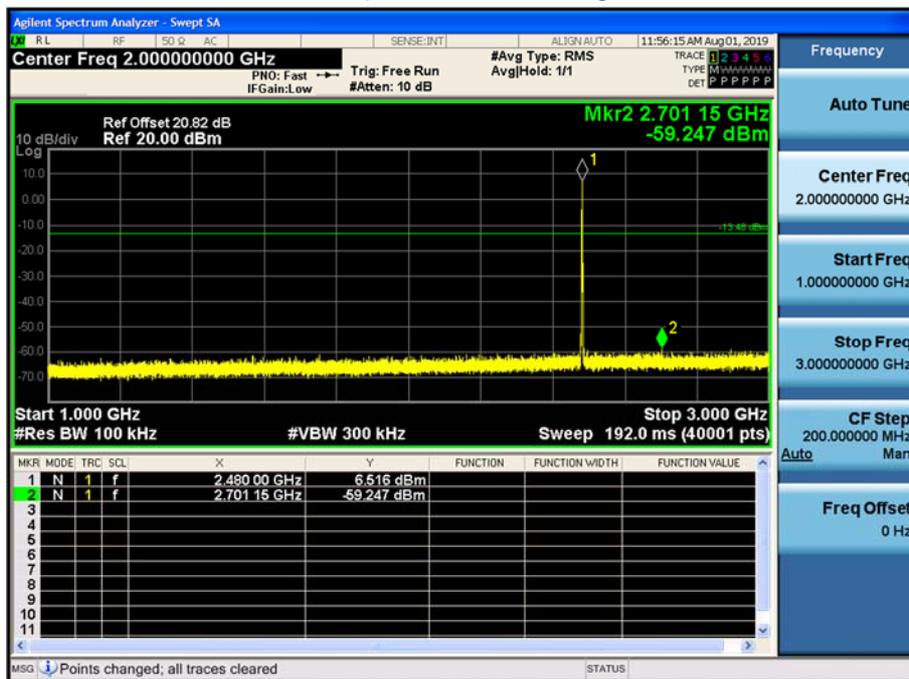


3 GHz ~ 5 GHz

Conducted Spurious Emission (High-CH 39)

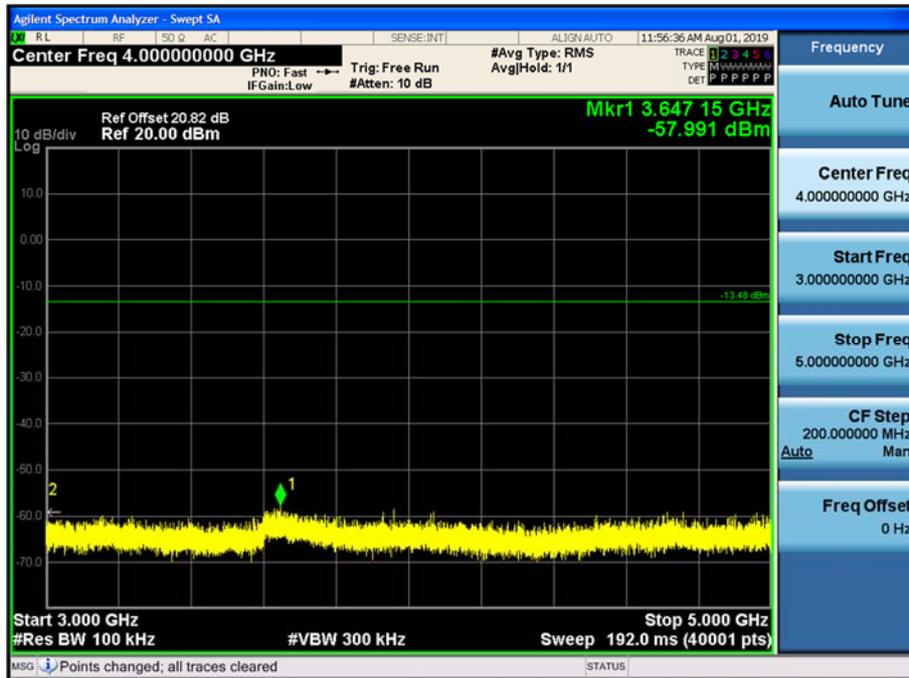


5 GHz ~ 7 GHz

Conducted Spurious Emission (High-CH 39)

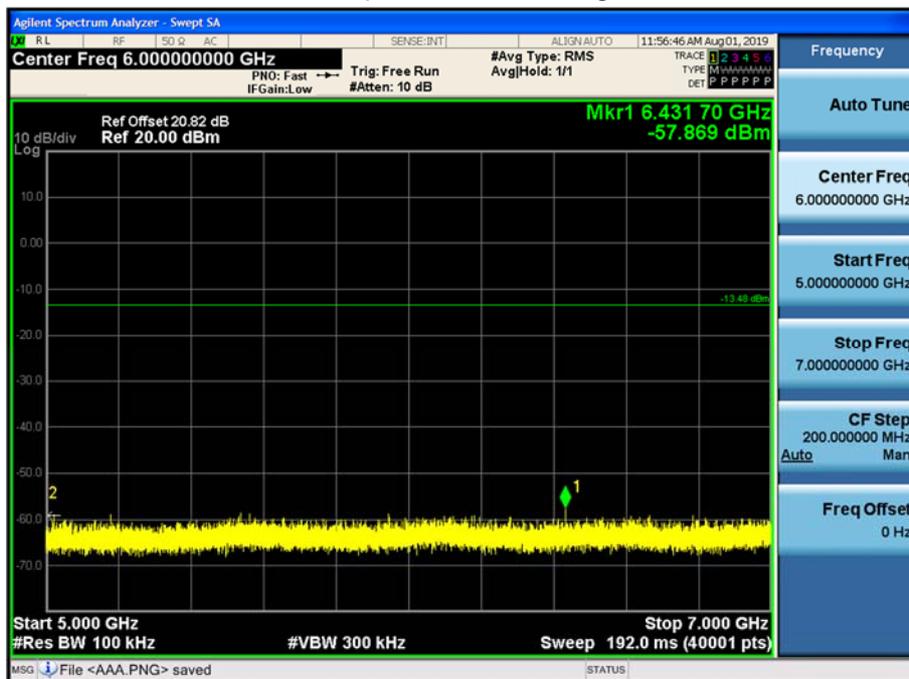


7 GHz ~ 9 GHz

Conducted Spurious Emission (High-CH 39)

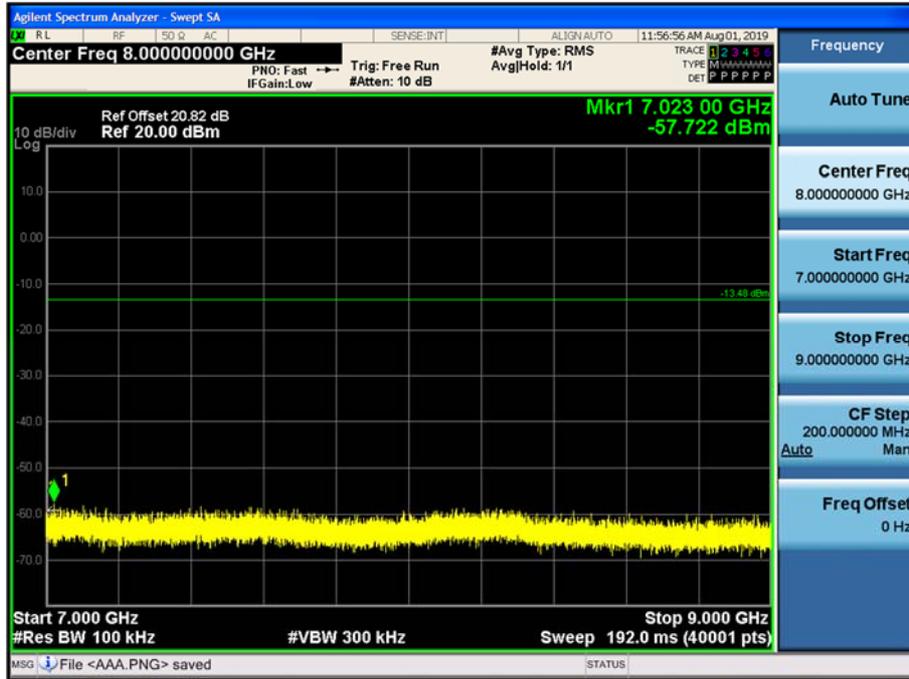


9 GHz ~ 11 GHz

Conducted Spurious Emission (High-CH 39)

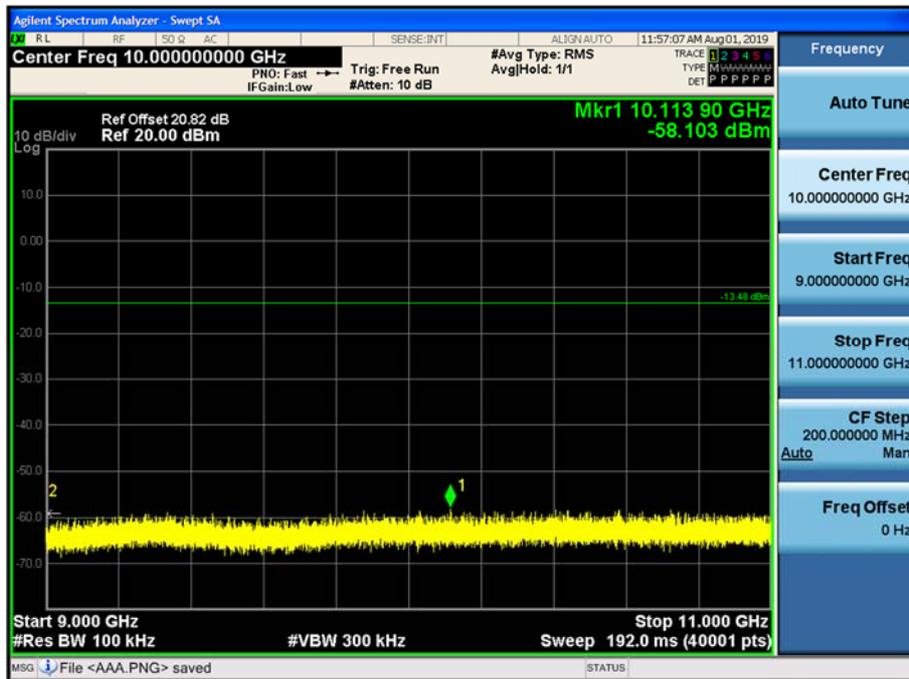


11 GHz ~ 13 GHz

Conducted Spurious Emission (High-CH 39)

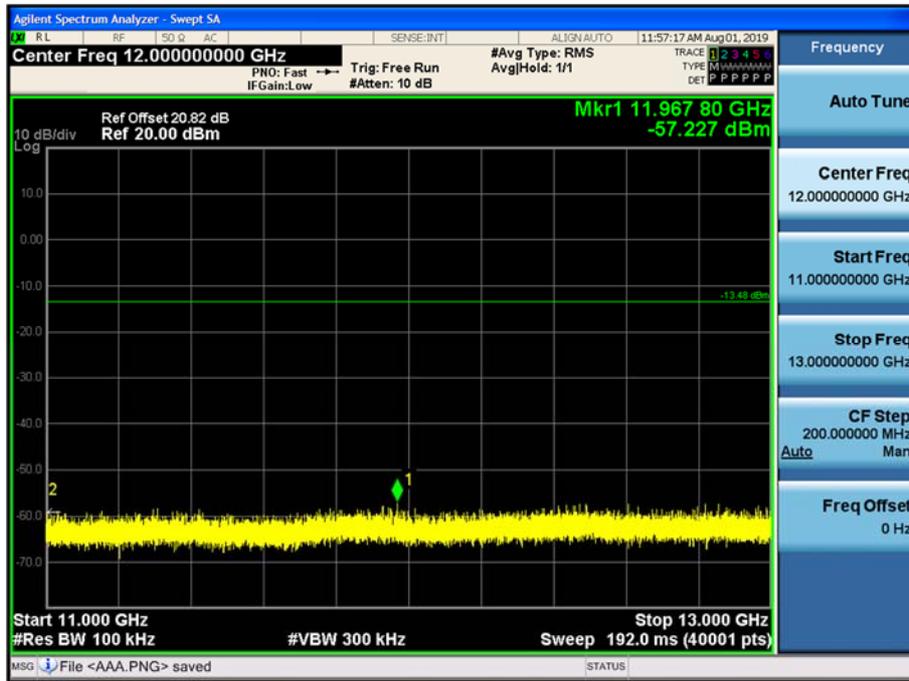


13 GHz ~ 15 GHz

Conducted Spurious Emission (High-CH 39)

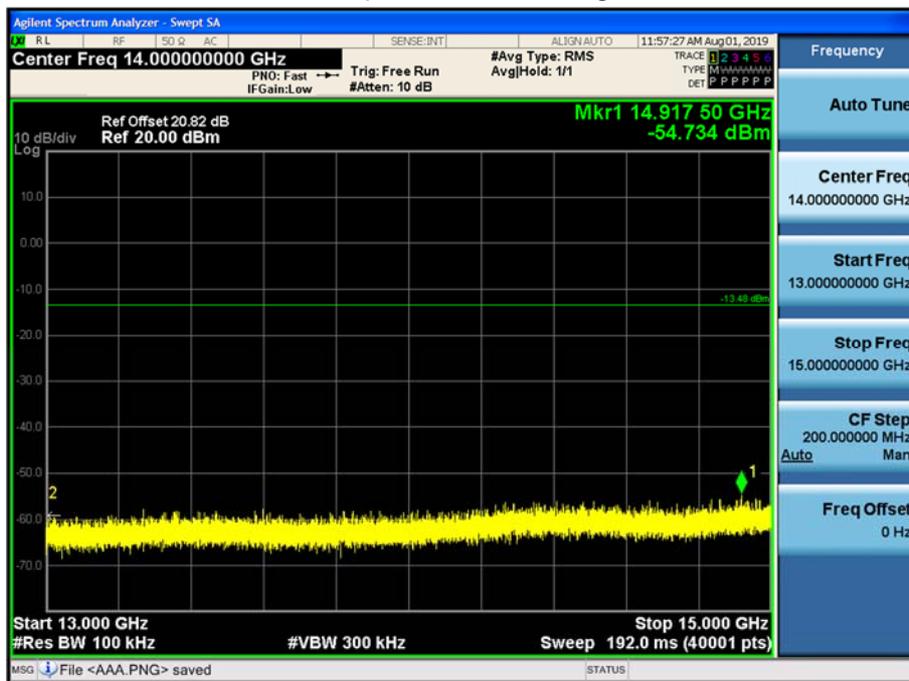


15 GHz ~ 17 GHz

Conducted Spurious Emission (High-CH 39)

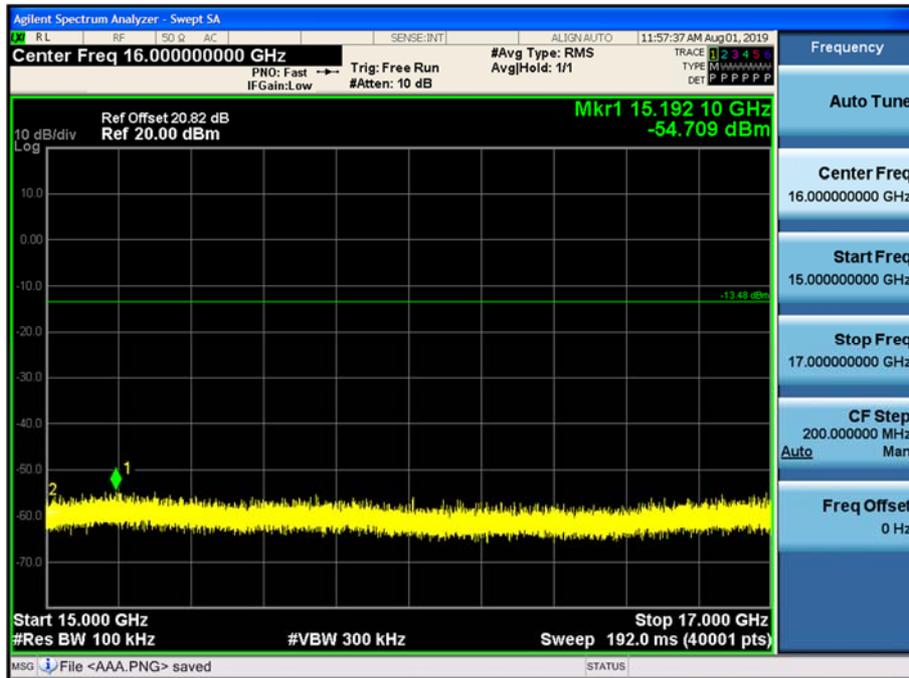


17 GHz ~ 19 GHz

Conducted Spurious Emission (High-CH 39)

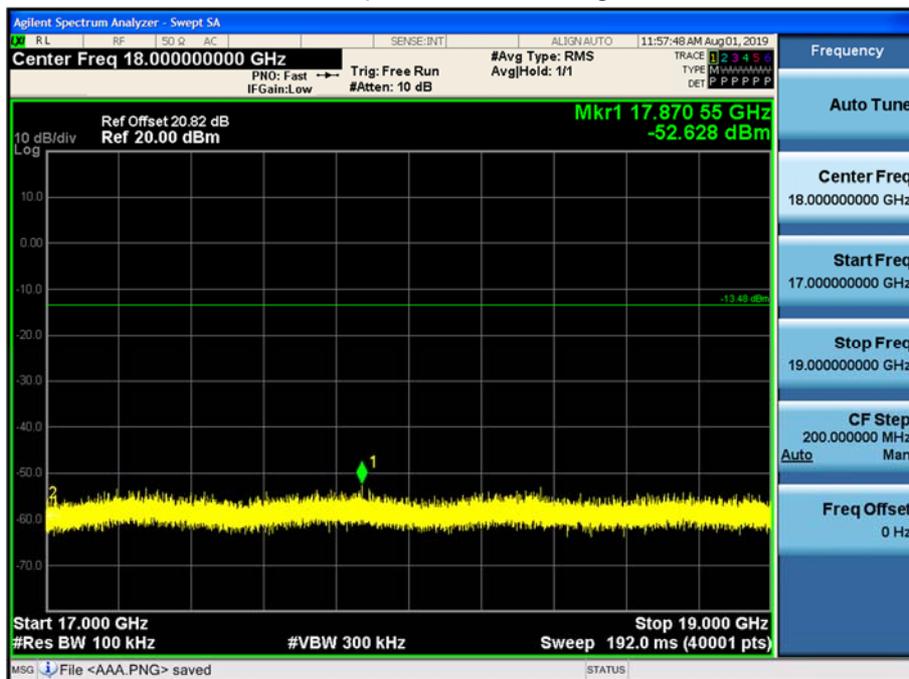


19 GHz ~ 21 GHz

Conducted Spurious Emission (High-CH 39)

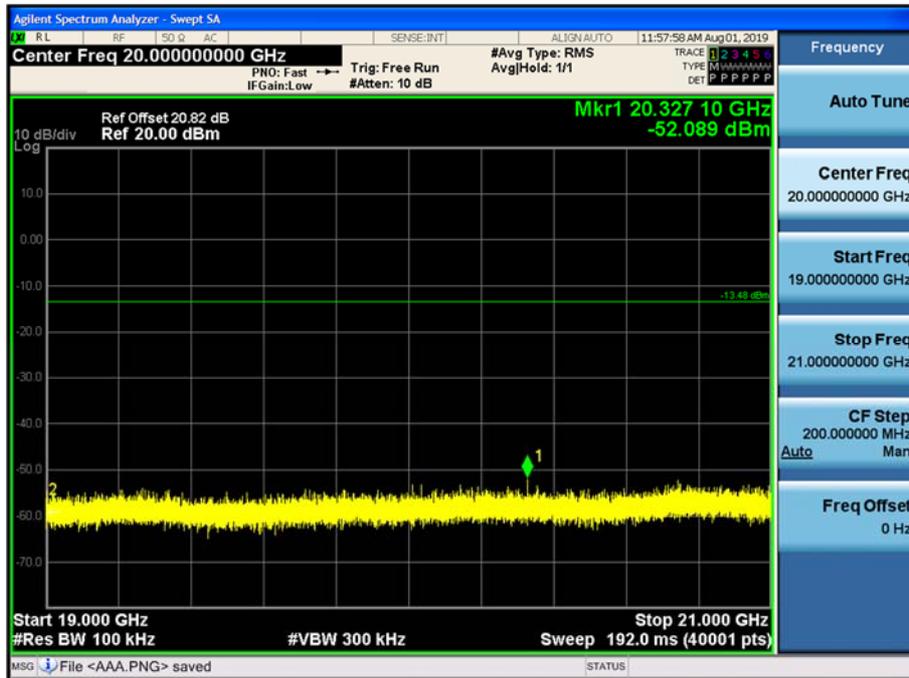


21 GHz ~ 23 GHz

Conducted Spurious Emission (High-CH 39)

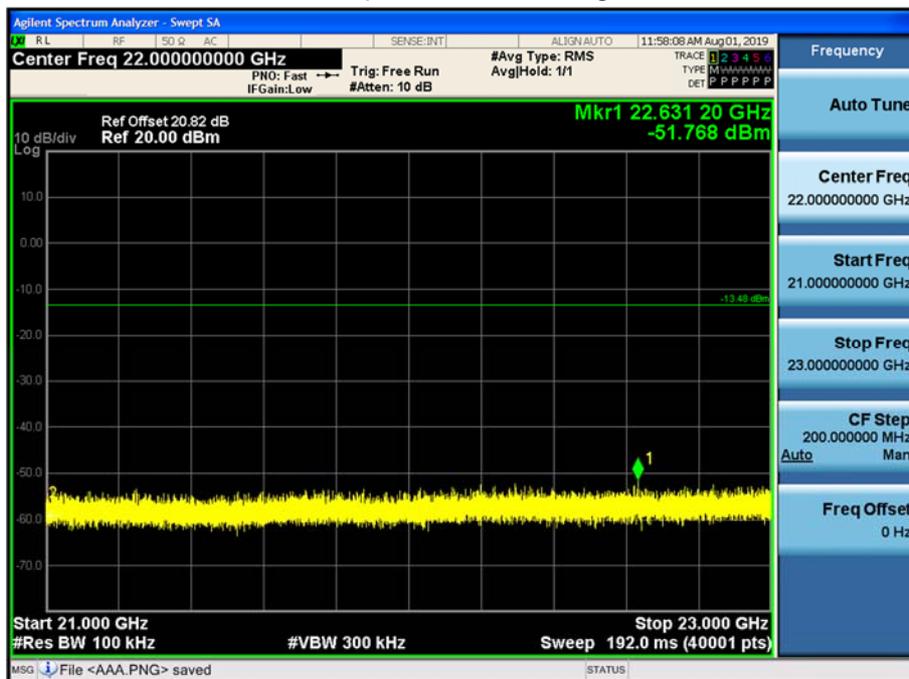

23 GHz ~ 25 GHz

Conducted Spurious Emission (High-CH 39)

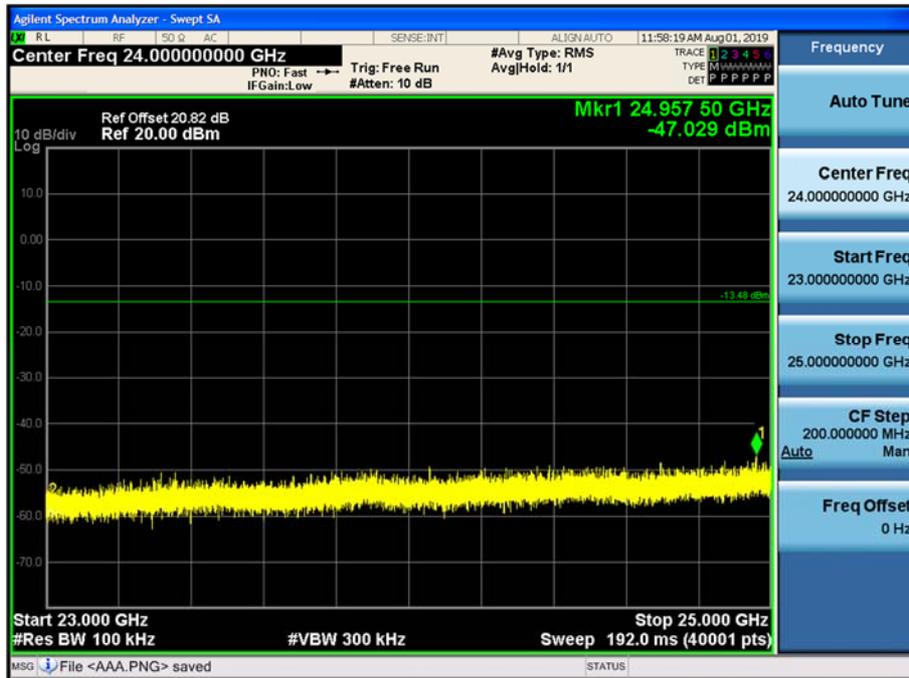

### 9.6 RADIATED SPURIOUS EMISSIONS

**Frequency Range : 9 kHz – 30MHz**

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \cdot \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

**Frequency Range : Below 1 GHz**

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 5.0 LE: 1M PHY Bit/s (37 Byte)

Operation Mode: CH Low

Frequency [MHz]	Reading dBuV	Duty cycle Factor	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	44.86	0.00	2.17	V	47.03	73.98	26.95	PK
4804	33.15	2.18	2.17	V	37.5	53.98	16.48	AV
7206	43.76	0.00	8.97	V	52.73	73.98	21.25	PK
7206	32.68	2.18	8.97	V	43.83	53.98	10.15	AV
4804	44.98	0.00	2.17	H	47.15	73.98	26.83	PK
4804	33.28	2.18	2.17	H	37.63	53.98	16.35	AV
7206	43.87	0.00	8.97	H	52.84	73.98	21.14	PK
7206	32.73	2.18	8.97	H	43.88	53.98	10.10	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading dBuV	Duty cycle Factor	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4880	43.69	0.00	2.66	V	46.35	73.98	27.63	PK
4880	31.11	2.18	2.66	V	35.95	53.98	18.03	AV
7320	42.37	0.00	9.04	V	51.41	73.98	22.57	PK
7320	30.59	2.18	9.04	V	41.81	53.98	12.17	AV
4880	44.08	0.00	2.66	H	46.74	73.98	27.24	PK
4880	31.29	2.18	2.66	H	36.13	53.98	17.85	AV
7320	42.56	0.00	9.04	H	51.6	73.98	22.38	PK
7320	30.63	2.18	9.04	H	41.85	53.98	12.13	AV

Operation Mode: CH High

Frequency [MHz]	Reading dBuV	Duty cycle Factor	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	43.29	0.00	1.54	V	44.83	73.98	29.15	PK
4960	31.22	2.18	1.54	V	34.94	53.98	19.04	AV
7440	41.18	0.00	9.82	V	51	73.98	22.98	PK
7440	29.10	2.18	9.82	V	41.1	53.98	12.88	AV
4960	43.31	0.00	1.54	H	44.85	73.98	29.13	PK
4960	31.46	2.18	1.54	H	35.18	53.98	18.80	AV
7440	41.30	0.00	9.82	H	51.12	73.98	22.86	PK
7440	29.14	2.18	9.82	H	41.14	53.98	12.84	AV

**Mode : 5.0 LE: 2M PHY Bit/s (37 Byte)**

Operation Mode: CH Low

Frequency [MHz]	Reading dBuV	Duty cycle Factor	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	45.18	0.00	2.17	V	47.35	73.98	26.63	PK
4804	33.15	5.06	2.17	V	40.38	53.98	13.60	AV
7206	43.39	0.00	8.97	V	52.36	73.98	21.62	PK
7206	30.89	5.06	8.97	V	44.92	53.98	9.06	AV
4804	45.25	0.00	2.17	H	47.42	73.98	26.56	PK
4804	33.20	5.06	2.17	H	40.43	53.98	13.55	AV
7206	43.62	0.00	8.97	H	52.59	73.98	21.39	PK
7206	31.02	5.06	8.97	H	45.05	53.98	8.93	AV

Operation Mode: CH Mid


Frequency [MHz]	Reading dBuV	Duty cycle Factor	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4880	43.08	0.00	2.66	V	45.74	73.98	28.24	PK
4880	31.29	5.06	2.66	V	39.01	53.98	14.97	AV
7320	42.99	0.00	9.04	V	52.03	73.98	21.95	PK
7320	30.12	5.06	9.04	V	44.22	53.98	9.76	AV
4880	43.16	0.00	2.66	H	45.82	73.98	28.16	PK
4880	31.40	5.06	2.66	H	39.12	53.98	14.86	AV
7320	43.01	0.00	9.04	H	52.05	73.98	21.93	PK
7320	30.19	5.06	9.04	H	44.29	53.98	9.69	AV

Operation Mode: CH High

Frequency [MHz]	Reading dBuV	Duty cycle Factor	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	43.01	0.00	1.54	V	44.55	73.98	29.43	PK
4960	31.45	5.06	1.54	V	38.05	53.98	15.93	AV
7440	40.58	0.00	9.82	V	50.4	73.98	23.58	PK
7440	28.72	5.06	9.82	V	43.6	53.98	10.38	AV
4960	43.07	0.00	1.54	H	44.61	73.98	29.37	PK
4960	31.59	5.06	1.54	H	38.19	53.98	15.79	AV
7440	40.64	0.00	9.82	H	50.46	73.98	23.52	PK
7440	28.88	5.06	9.82	H	43.76	53.98	10.22	AV


### 5.0 LE: 1M PHY Bit 37 Byte Test Plots (Worst case : H)

Radiated Spurious Emissions plot – Average Reading (Ch.0 3rd Harmonic)

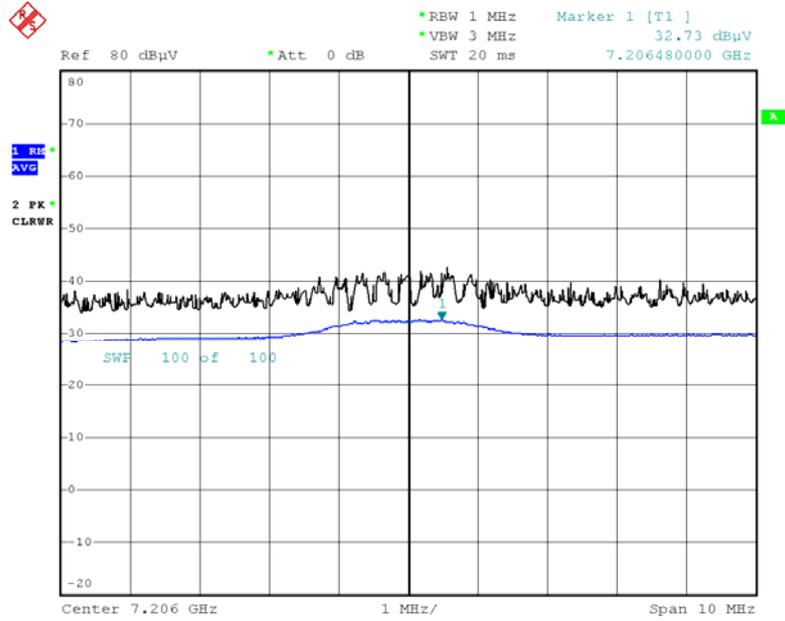

Date: 23.JUL.2019 13:36:48


Radiated Spurious Emissions plot – Peak Reading (Ch.0 3rd Harmonic)

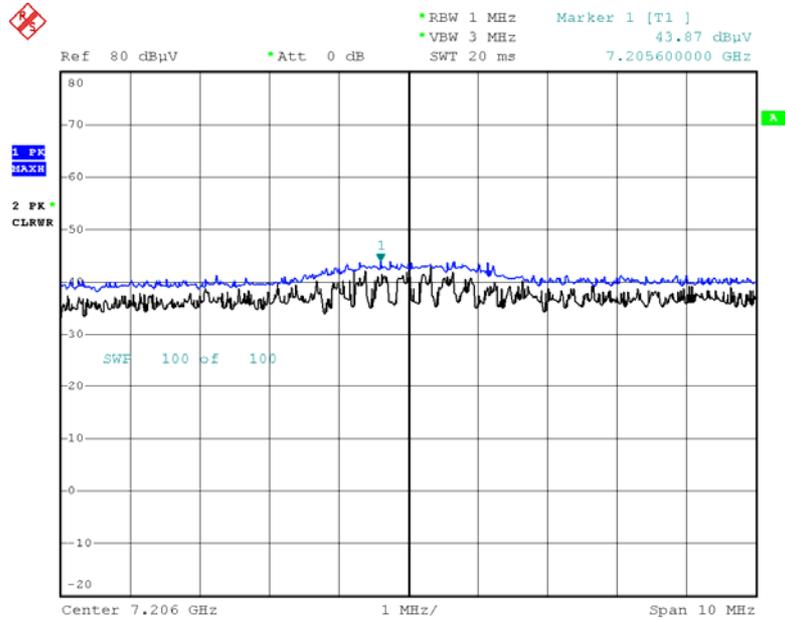

Date: 23.JUL.2019 13:37:52


5.0 LE: 2M PHY Bit 37 Byte Test Plots (Worst case : H)

Radiated Spurious Emissions plot – Average Reading (Ch.0 3rd Harmonic)

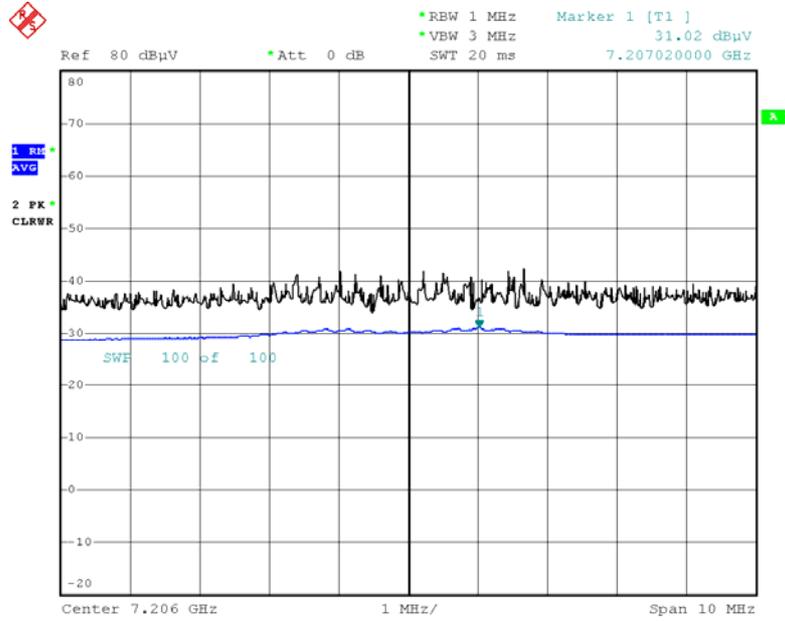

Date: 23.JUL.2019 15:05:15

Radiated Spurious Emissions plot – Peak Reading (Ch.0 3rd Harmonic)

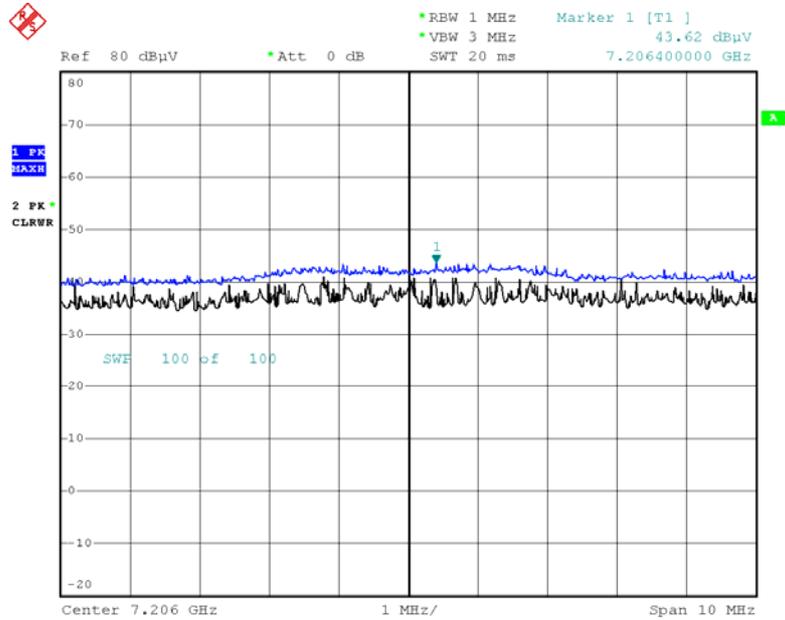

Date: 23.JUL.2019 15:06:43

**Note:**

Plot of worst case are only reported.

### 9.7 RADIATED RESTRICTED BAND EDGES

Mode : 5.0 LE: 1M PHY Bit/s 37 byte

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading dBuV	Duty cycle Factor	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	14.25	0.00	35.17	H	49.42	73.98	24.56	PK
2390.0	3.17	2.18	35.17	H	40.52	53.98	13.46	AV
2390.0	14.22	0.00	35.17	V	49.39	73.98	24.59	PK
2390.0	3.16	2.18	35.17	V	40.51	53.98	13.48	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty cycle [dB]	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2483.5	14.75	0.00	35.36	H	50.11	73.98	23.88	PK
2483.5	3.56	2.18	35.36	H	41.10	53.98	12.88	AV
2483.5	14.68	0.00	35.36	V	50.04	73.98	23.94	PK
2483.5	3.45	2.18	35.36	V	40.99	53.98	12.99	AV

Mode : 5.0 LE: 2M PHY Bit/s 37 byte

Operating Frequency 2402 MHz  
 Channel No. 0


Frequency [MHz]	Reading dBuV	Duty cycle Factor	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	17.64	0.00	35.17	H	52.81	73.98	21.17	PK
2390.0	6.80	5.06	35.17	H	47.03	53.98	6.95	AV
2390.0	17.51	0.00	35.17	V	52.68	73.98	21.30	PK
2390.0	6.77	5.06	35.17	V	47.00	53.98	6.98	AV

Operating Frequency 2480 MHz  
 Channel No. 39


Frequency [MHz]	Reading [dBuV/m]	Duty cycle [dB]	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2483.5	19.41	0.00	35.36	H	54.77	73.98	19.21	PK
2483.5	7.21	5.06	35.36	H	47.63	53.98	6.35	AV
2483.5	19.17	0.00	35.36	V	54.53	73.98	19.45	PK
2483.5	7.20	5.06	35.36	V	47.62	53.98	6.37	AV

Mode : 5.0 LE: 1M PHY Bit/s (37 Byte) Test Plots (Worst case : H)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

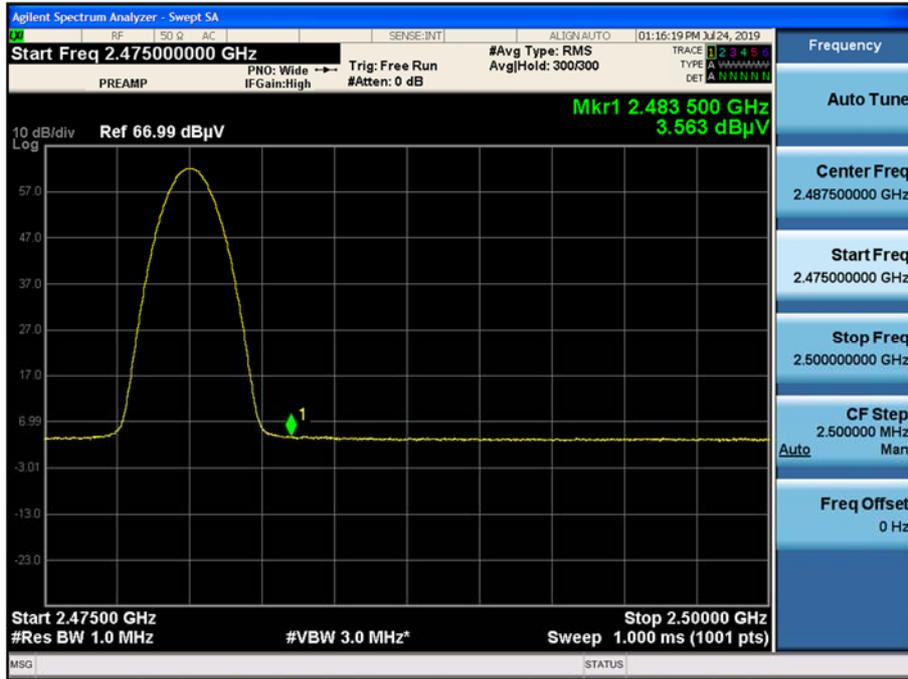


Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

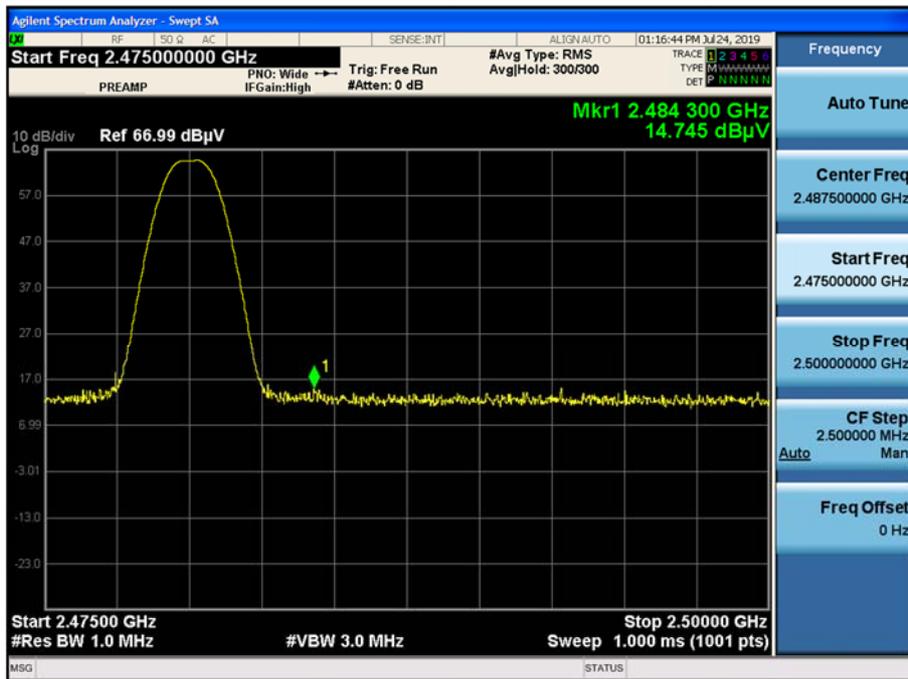


Mode : 5.0 LE: 2M PHY Bit/s (37 Byte) Test Plots (Worst case : H)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

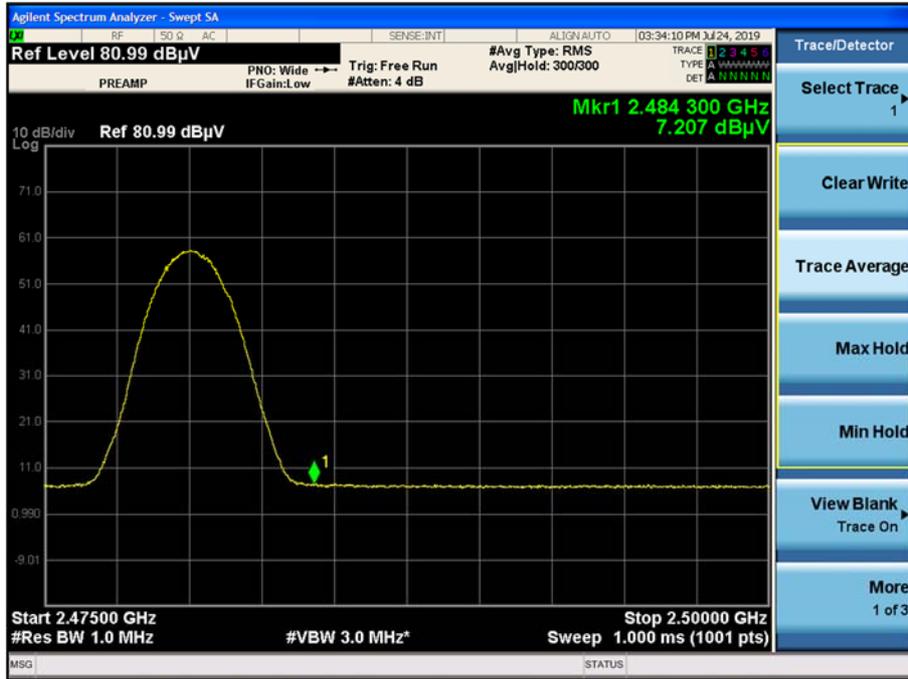

Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

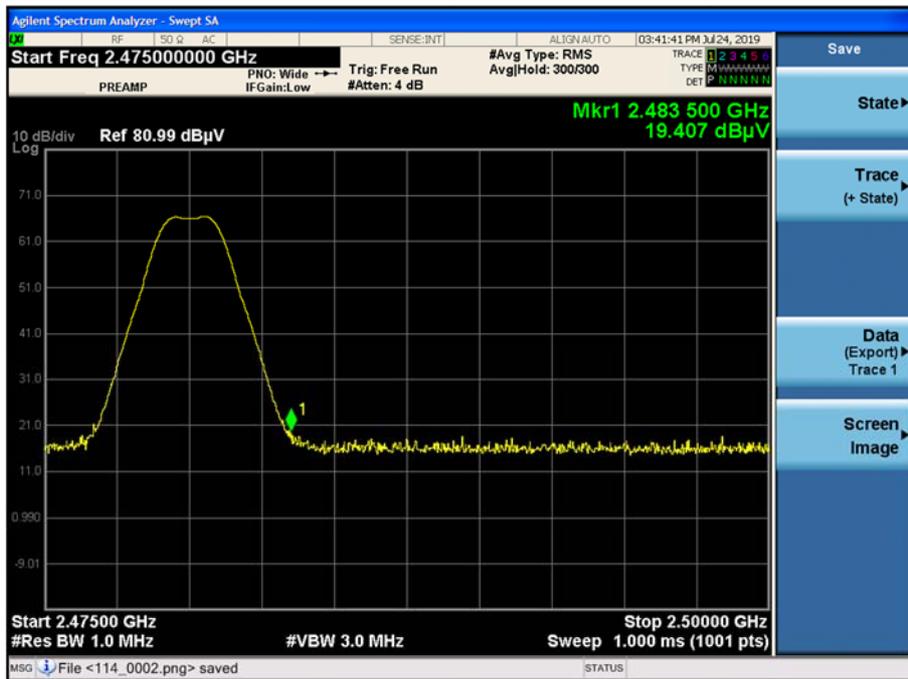

**Note:**

Plot of worst case are only reported.

### 9.8 RECEIVER SPURIOUS EMISSIONS

#### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

#### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

## 9.9 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: LGSBWAC02  
 Manufacturer: LG Electronics, Inc.  
 Test Site: SHIELD ROOM  
 Operating Conditions: BLE\_L1

FCC CLASS B

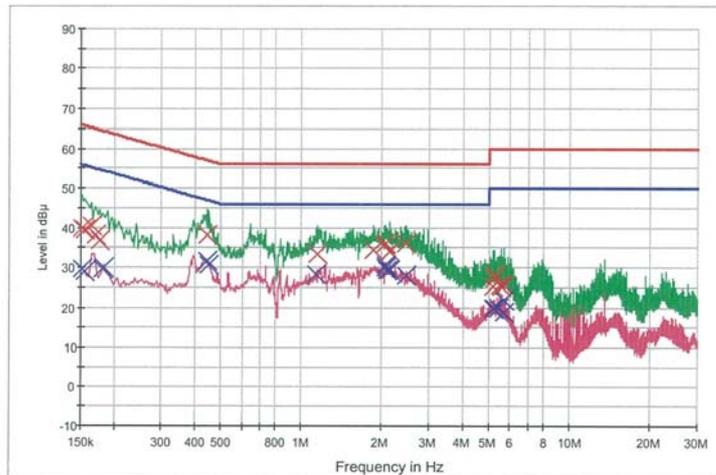

— FCC CLASS B\_OP     — FCC CLASS B\_AV     — Preview Result 1-PK+  
— Preview Result 2-AVG     x Final Result 1-QPK     x Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.152000	39.8	9.000	Off	L1	9.6	26.0	65.9
0.156000	39.4	9.000	Off	L1	9.6	26.3	65.7
0.164000	40.7	9.000	Off	L1	9.6	24.6	65.3
0.170000	38.2	9.000	Off	L1	9.6	26.8	65.0
0.176000	36.9	9.000	Off	L1	9.6	27.8	64.7
0.446000	38.2	9.000	Off	L1	9.7	18.8	56.9
1.148000	33.5	9.000	Off	L1	9.7	22.5	56.0
1.850000	34.4	9.000	Off	L1	9.7	21.6	56.0
2.040000	35.8	9.000	Off	L1	9.7	20.2	56.0
2.068000	36.0	9.000	Off	L1	9.7	20.0	56.0
2.142000	34.2	9.000	Off	L1	9.7	21.8	56.0
2.444000	36.2	9.000	Off	L1	9.8	19.8	56.0
5.170000	25.1	9.000	Off	L1	9.8	34.9	60.0
5.272000	28.2	9.000	Off	L1	9.9	31.8	60.0
5.278000	27.1	9.000	Off	L1	9.9	32.9	60.0
5.474000	25.5	9.000	Off	L1	9.9	34.5	60.0
5.574000	25.2	9.000	Off	L1	9.9	34.8	60.0
5.674000	25.5	9.000	Off	L1	9.9	34.5	60.0

2019-07-15

오후 9:07:28

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	29.7	9.000	Off	L1	9.6	26.2	55.9
0.156000	29.1	9.000	Off	L1	9.6	26.5	55.7
0.180000	29.6	9.000	Off	L1	9.6	24.9	54.5
0.184000	30.1	9.000	Off	L1	9.6	24.2	54.3
0.446000	31.6	9.000	Off	L1	9.7	15.3	46.9
0.452000	30.6	9.000	Off	L1	9.7	16.3	46.8
1.138000	28.3	9.000	Off	L1	9.7	17.7	46.0
2.062000	30.7	9.000	Off	L1	9.7	15.3	46.0
2.068000	30.1	9.000	Off	L1	9.7	15.9	46.0
2.096000	29.5	9.000	Off	L1	9.7	16.5	46.0
2.142000	29.2	9.000	Off	L1	9.7	16.8	46.0
2.460000	28.1	9.000	Off	L1	9.8	17.9	46.0
5.170000	19.8	9.000	Off	L1	9.8	30.2	50.0
5.272000	19.8	9.000	Off	L1	9.9	30.2	50.0
5.446000	19.8	9.000	Off	L1	9.9	30.2	50.0
5.674000	22.0	9.000	Off	L1	9.9	28.0	50.0
5.724000	18.8	9.000	Off	L1	9.9	31.2	50.0
5.730000	18.8	9.000	Off	L1	9.9	31.2	50.0

2019-07-15

오후 9:07:28

**Conducted Emissions (Line 2)**

Test


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LGSBWAC02  
 Manufacturer: LG Electronics, Inc.  
 Test Site: SHIELD ROOM  
 Operating Conditions: BLE\_N

FCC CLASS B

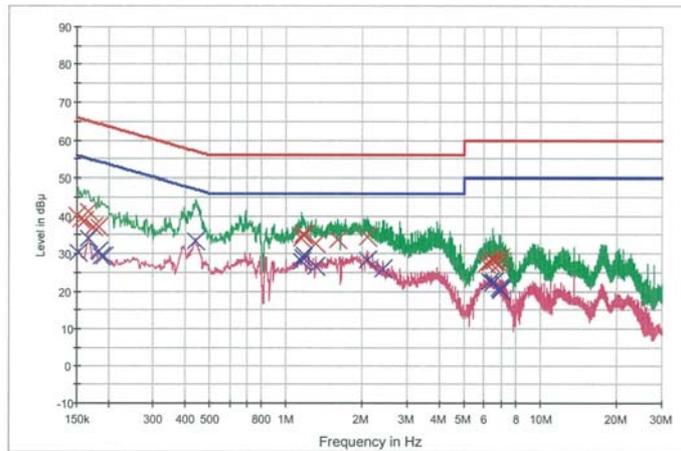

— FCC CLASS B\_OP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-GPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	40.3	9.000	Off	N	9.6	25.7	66.0
0.156000	39.2	9.000	Off	N	9.6	26.5	65.7
0.160000	38.9	9.000	Off	N	9.6	26.6	65.5
0.166000	41.1	9.000	Off	N	9.6	24.1	65.2
0.174000	37.3	9.000	Off	N	9.6	27.5	64.8
0.182000	37.2	9.000	Off	N	9.6	27.2	64.4
1.144000	34.1	9.000	Off	N	9.7	21.9	56.0
1.166000	35.1	9.000	Off	N	9.7	20.9	56.0
1.170000	35.0	9.000	Off	N	9.7	21.0	56.0
1.300000	32.7	9.000	Off	N	9.7	23.3	56.0
1.602000	33.7	9.000	Off	N	9.7	22.3	56.0
2.094000	34.4	9.000	Off	N	9.7	21.6	56.0
6.136000	27.5	9.000	Off	N	9.9	32.5	60.0
6.338000	27.8	9.000	Off	N	9.9	32.2	60.0
6.468000	28.5	9.000	Off	N	9.9	31.5	60.0
6.540000	27.9	9.000	Off	N	9.9	32.1	60.0
6.842000	27.2	9.000	Off	N	9.9	32.8	60.0
6.942000	28.9	9.000	Off	N	9.9	31.1	60.0

2019-07-15

오후 9:17:32

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	30.5	9.000	Off	N	9.6	25.4	55.9
0.166000	34.2	9.000	Off	N	9.6	20.9	55.2
0.182000	30.6	9.000	Off	N	9.6	23.8	54.4
0.188000	29.4	9.000	Off	N	9.6	24.7	54.1
0.192000	29.3	9.000	Off	N	9.6	24.6	53.9
0.440000	33.3	9.000	Off	N	9.6	13.8	47.1
1.144000	27.8	9.000	Off	N	9.7	18.2	46.0
1.166000	29.1	9.000	Off	N	9.7	16.9	46.0
1.170000	29.5	9.000	Off	N	9.7	16.5	46.0
1.300000	26.7	9.000	Off	N	9.7	19.3	46.0
2.096000	28.4	9.000	Off	N	9.7	17.6	46.0
2.412000	25.9	9.000	Off	N	9.7	20.1	46.0
6.338000	22.6	9.000	Off	N	9.9	27.4	50.0
6.468000	22.3	9.000	Off	N	9.9	27.7	50.0
6.556000	22.4	9.000	Off	N	9.9	27.6	50.0
6.844000	21.0	9.000	Off	N	9.9	29.0	50.0
6.940000	20.2	9.000	Off	N	9.9	29.8	50.0
6.950000	20.5	9.000	Off	N	9.9	29.5	50.0

2019-07-15

오후 9:17:32

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	01/10/2019	Annual	MY49431210
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/09/2018	Biennial	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	11/21/2017	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/19/2018	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/19/2018	Annual	101068-SZ
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	01/03/2019	Annual	4
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	01/03/2019	Annual	5
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/04/2019	Annual	1
WEINSCHEL	56-10 / Attenuator(10 dB)	10/10/2018	Annual	72316
CERNEX	CBLU1183540B-01/Broadband Bench Top LNA	01/03/2019	Annual	28549
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	01/03/2019	Annual	24615
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/26/2019	Annual	3000C000276

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1908-FI012-P