

# TEST REPORT

FCC/ISED DTS Test for LGSBWAC22  
Certification

**APPLICANT**  
LG Electronics Inc.

**REPORT NO.**  
HCT-RF-2106-FI014

**DATE OF ISSUE**  
June 25, 2021

**Tested by**  
Jin Gwan Lee



**Technical Manager**  
Se Wook Park



Accredited by KOLAS, Republic of KOREA

**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO



**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

고객비밀  
CUSTOMER SECRET



# TEST REPORT

FCC/ISED DTS Test  
for LGSBWAC22

**REPORT NO.**

HCT-RF-2106-FI014

**DATE OF ISSUE**

June 25, 2021

**Additional Model**

-

**Applicant**

**LG Electronics Inc.**

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

**Eut Type  
Model Name**

RF Module  
LGSBWAC22

**FCC ID  
IC**

BEJLGSBWAC22  
2703H-LGSBWAC22

**Modulation type**

CCK/DSSS/OFDM

**FCC Classification**

Digital Transmission System(DTS)

**FCC Rule Part(s)**

Part 15.247

**ISED Rule Part(s)**

RSS-247 Issue 2 (February 2017)  
RSS-Gen Issue 5\_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 25, 2021	Initial Release

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISSED Rules under normal use and maintenance.

### KOLAS Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

If this report is required to confirmation of authenticity, please contact to [www.hct.co.kr](http://www.hct.co.kr)

## CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	7
2. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	9
3. INSTRUMENT CALIBRATION	9
4. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
5. ANTENNA REQUIREMENTS	10
6. MEASUREMENT UNCERTAINTY	10
7. DESCRIPTION OF TESTS	11
8. SUMMARY TEST OF RESULTS	31
9. TEST RESULT	33
9.1 DUTY CYCLE	33
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	34
9.3 OUTPUT POWER	46
9.4 POWER SPECTRAL DENSITY	50
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	57
9.6 RADIATED SPURIOUS EMISSIONS	86
9.7 RADIATED RESTRICTED BAND EDGES	90
9.8 RECEIVER SPURIOUS EMISSIONS	95
9.9 POWERLINE CONDUCTED EMISSIONS	96
10. LIST OF TEST EQUIPMENT	100
11. ANNEX A_ TEST SETUP PHOTO	102

## 1. EUT DESCRIPTION

Model	LGSBWAC22		
Additional Model	-		
EUT Type	RF Module		
Power Supply	DC 3.30 V		
Frequency Range	2412 MHz - 2472 MHz		
Max. RF Output Power	Peak Power	Ant. 1 (SISO)	802.11b: 22.79 dBm 802.11g: 22.92 dBm 802.11n(HT20): 23.06 dBm 802.11n(HT40): 22.84 dBm
		Ant. 2 (SISO)	802.11b: 22.39 dBm 802.11g: 23.02 dBm 802.11n(HT20): 23.32 dBm 802.11n(HT40): 23.15 dBm
		Ant. 1 + Ant. 2 (MIMO)	802.11b: 25.49 dBm 802.11g: 25.98 dBm 802.11n(HT20): 26.20 dBm 802.11n(HT40): 26.01 dBm
	Average Power	Ant. 1 (SISO)	802.11b: 17.22 dBm 802.11g: 15.04 dBm 802.11n(HT20): 15.13 dBm 802.11n(HT40): 15.03 dBm
		Ant. 2 (SISO)	802.11b: 16.79 dBm 802.11g: 15.13 dBm 802.11n(HT20): 15.29 dBm 802.11n(HT40): 15.33 dBm
		Ant. 1 + Ant. 2 (MIMO)	802.11b: 20.01 dBm 802.11g: 18.10 dBm 802.11n(HT20): 18.22 dBm 802.11n(HT40): 18.20 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	13 Channels		
Antenna type	Metal press Antenna		
Antenna Peak Gain	Ant 1 : -0.94 dBi Ant 2 : 1.50 dBi		
Date(s) of Tests	April 15, 2021 ~ June 22, 2021		
PMN (Product Marketing Number)	RF Module		
HVIN (Hardware Version Identification Number)	LGSBWAC22		
FVIN (Firmware Version Identification Number)	1.0		
HMN (Host Marketing Name)	N/A		
EUT serial numbers	Radiated : ETWCERBC01-01 Conducted : ETWCERBC01-02		
Manufacturer	1. PT. LG INNOTEK INDONESIA Bekasi International Industrial Estate, Blok C8 NO. 12 & 12 A, Desa Cibatu, Cikarang Selatan, Bekasi 17750 – Indonesia		

	2. COMPAL NETWORKING(KUNSHAN)CO.,LTD No. 520, Nanbang Rd, Economic & Technical Development Zone, Kunshan, Jiangsu Province, China
--	---

## ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11b	O	O	X	O
802.11g	O	O	X	O
802.11n(HT20)	O	O	O	O
802.11n(HT40)	O	O	O	O

### Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

## 2. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii)

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

### Antenna Gain

2.4 GHz Band

Antenna Gain	Ant 1	-0.94 dBi
	Ant 2	1.50 dBi
Directional Antenna Gain	CDD : 4.51 dBi	
	SDM : 1.50 dBi	
$N_{ANT}/N_{SS}$	2/2	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)



## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of A NSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISSED, test facility was accepted dated January 26, 2021 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

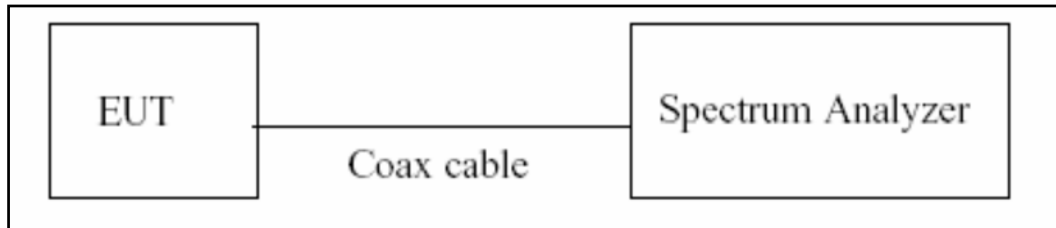

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{\text{total}}$  and  $T_{\text{on}}$
8. Calculate Duty Cycle =  $T_{\text{on}}/T_{\text{total}}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6dB Bandwidth & 99 % Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\cong 3 \times$  RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10.2 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
  - 2) Span = 1.5 times the DTS channel bandwidth.
  - 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
  - 4)  $VBW \geq 3 \times RBW$ .
  - 5) Sweep = auto couple
  - 6) Detector = peak
  - 7) Trace Mode = max hold
  - 8) Allow trace to fully stabilize.
  - 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	20.05
100	20.10
200	20.14
300	20.19
400	20.25
500	20.25
600	20.26
700	20.27
800	20.28
900	20.30
1000	20.35
2000	20.50
2400	20.53
2412	20.55
2437	20.55
2462	20.55
2500	20.54
3000	20.64
4000	20.72
5000	20.79
5700	20.80
5800	20.87
6000	20.88
7000	21.01
8000	21.01
9000	21.09
10000	21.19
11000	21.28
12000	21.37
13000	21.38
14000	21.41
15000	21.51
16000	21.59
17000	21.80
18000	21.93
19000	21.85
20000	21.52
21000	21.65
22000	21.64
23000	21.65
24000	21.66
25000	21.76

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss



## 7.6. Radiated Test

### Limit

#### FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

#### ISED


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

#### FCC&ISED


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

## Test Configuration


Below 30 MHz

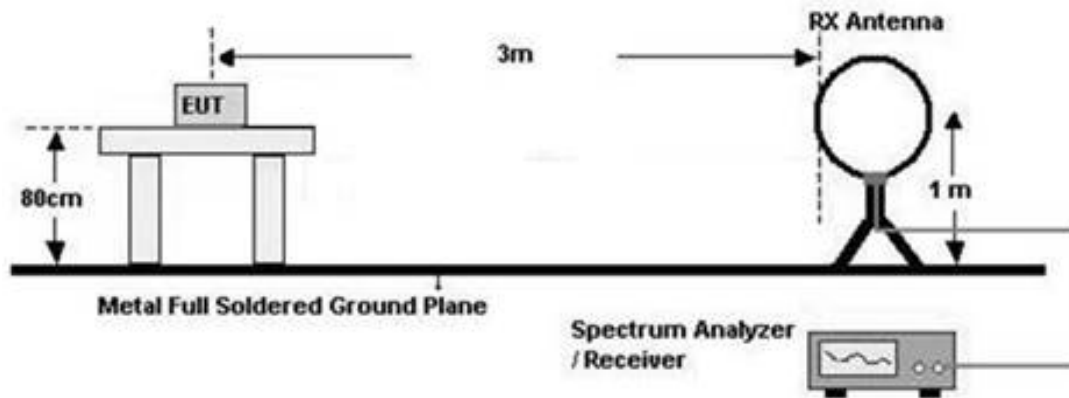

30 MHz - 1 GHz

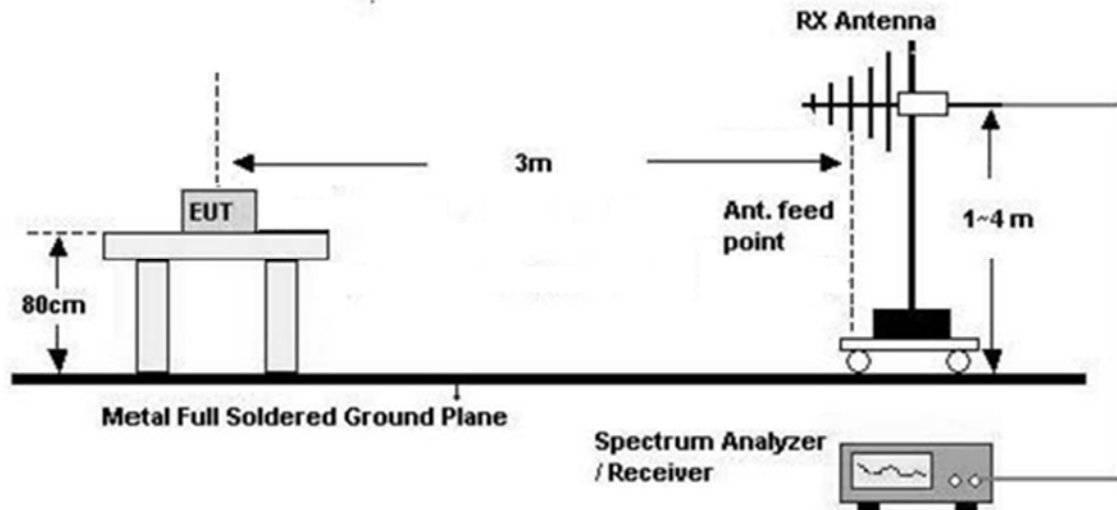

Above 1 GHz

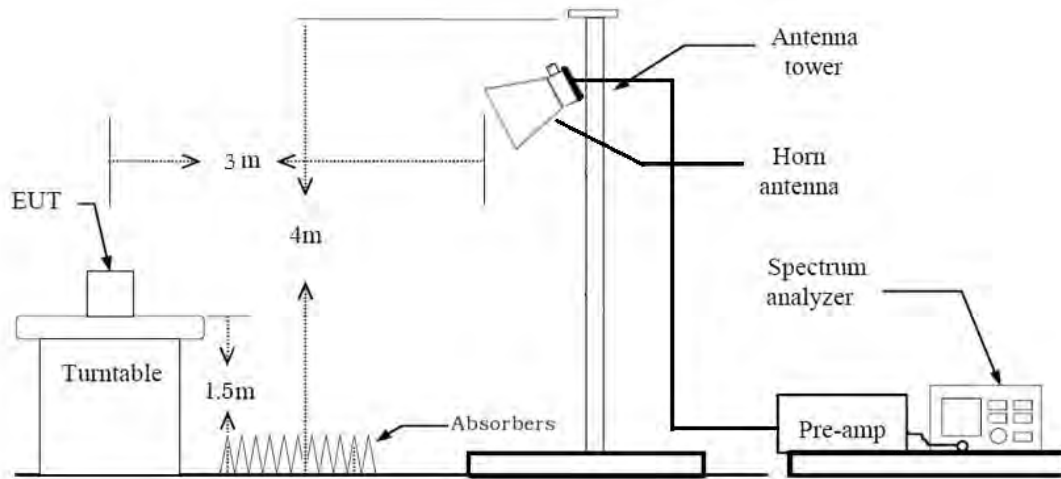

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
- ※In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

## 8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

### (1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

### (2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

### (3) Measurement Type(Average): Duty cycle $< 98\%$ , duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $< 98\%$ )

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)  
+ Duty Cycle Factor

### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

(2) Measurement Type(Average): Duty cycle  $\geq 98\%$ ,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.

- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW  $\geq 3 \times$  RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)  
+ Duty Cycle Factor



## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.8. Receiver Spurious Emissions

### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

### Test Configuration

30 MHz - 1 GHz

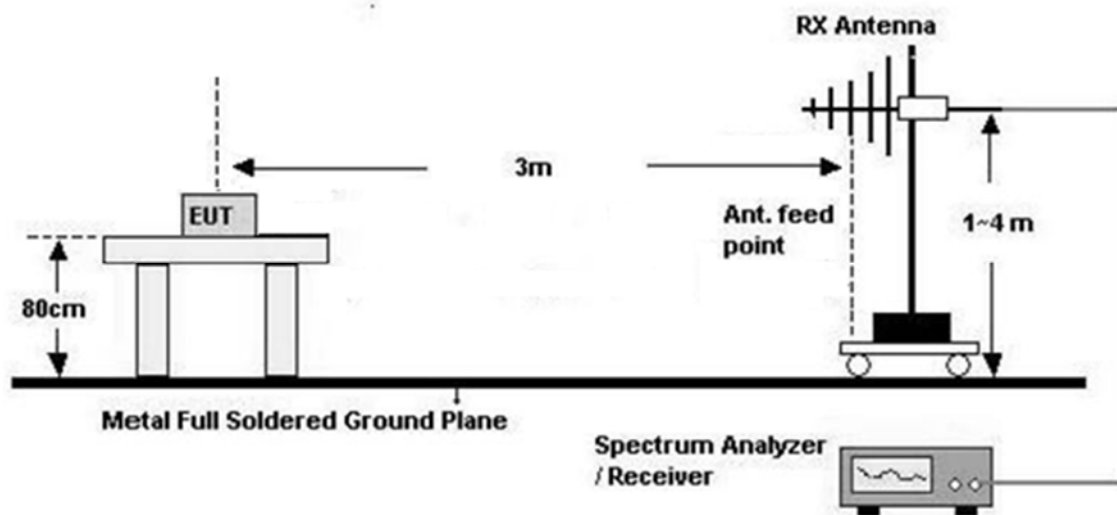

### Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

#### 6. Spectrum Setting

##### (1) Measurement Type(Peak):


- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

##### (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

#### 7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

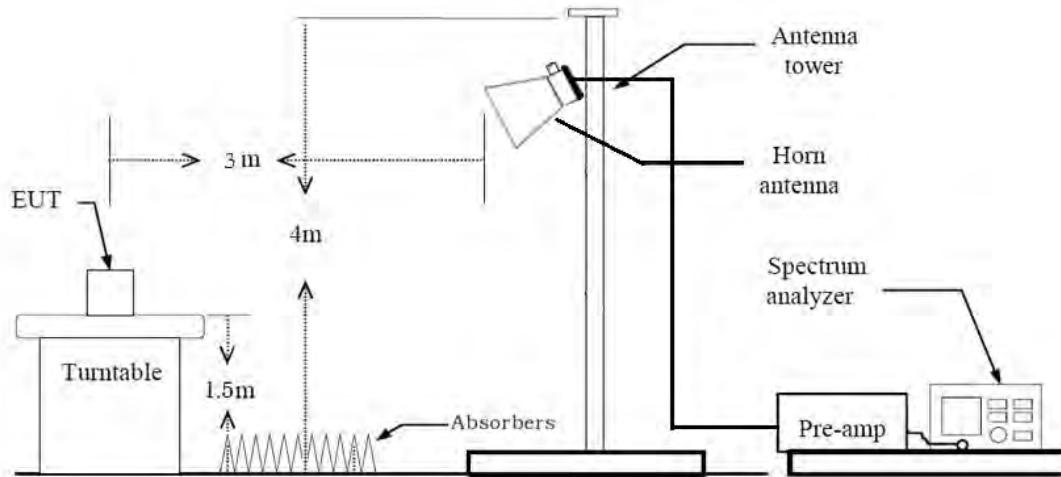

#### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

##### (1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

## 7.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
  - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD,SDM)
  - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
  - Radiated Spurious Emissions : Z
  - Radiated Restricted Band Edge : Y
4. Test was performed with continuous Tx.
5. All data rate of operation were investigated and the worst case data rate results are reported
  - 802.11b : 11Mbps
  - 802.11g : 9Mbps
  - 802.11n : MCS0
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + External accessories (Notebook)

### Conducted test

1. The EUT was configured with data rate of highest power.
2. SISO & MIMO were tested and the all case results are reported.
  - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(MIMO)

## 8. SUMMARY TEST OF RESULTS

### FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

### ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS



## 9. TEST RESULT

### 9.1 DUTY CYCLE

Mode	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	-	-	-	-
802.11g	-	-	-	-
802.11n (HT20)	-	-	-	-
802.11n (HT40)	-	-	-	-

**Note:**

- Duty Cycle Factor =  $10 \times \log(1/\text{Duty Cycle})$ . where, Duty Cycle =  $T_{\text{on}} / T_{\text{total}}$
- Test was performed with continuous Tx.

## 9.2 6dB BANDWIDTH & 99 % BANDWIDTH

### FCC

#### [ANT 1]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	10.171	> 0.5
2437	6	10.233	> 0.5
2462	11	10.232	> 0.5
2467	12	10.222	> 0.5
2472	13	10.229	> 0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.466	> 0.5
2437	6	16.460	> 0.5
2462	11	16.449	> 0.5
2467	12	16.456	> 0.5
2472	13	16.535	> 0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.662	> 0.5
2437	6	17.663	> 0.5
2462	11	17.662	> 0.5
2467	12	17.661	> 0.5
2472	13	17.708	> 0.5

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.457	> 0.5
2437	6	36.462	> 0.5
2452	9	36.431	> 0.5

[ANT 2]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	10.234	> 0.5
2437	6	10.233	> 0.5
2462	11	10.247	> 0.5
2467	12	10.222	> 0.5
2472	13	10.236	> 0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.452	> 0.5
2437	6	16.439	> 0.5
2462	11	16.443	> 0.5
2467	12	16.456	> 0.5
2472	13	16.475	> 0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.656	> 0.5
2437	6	17.651	> 0.5
2462	11	17.650	> 0.5
2467	12	17.662	> 0.5
2472	13	17.711	> 0.5

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.435	> 0.5
2437	6	36.447	> 0.5
2452	9	36.444	> 0.5


[ANT 1]

■ Test Plots

6dB Bandwidth plot (802.11b-CH 1)



6dB Bandwidth plot (802.11g-CH 11)

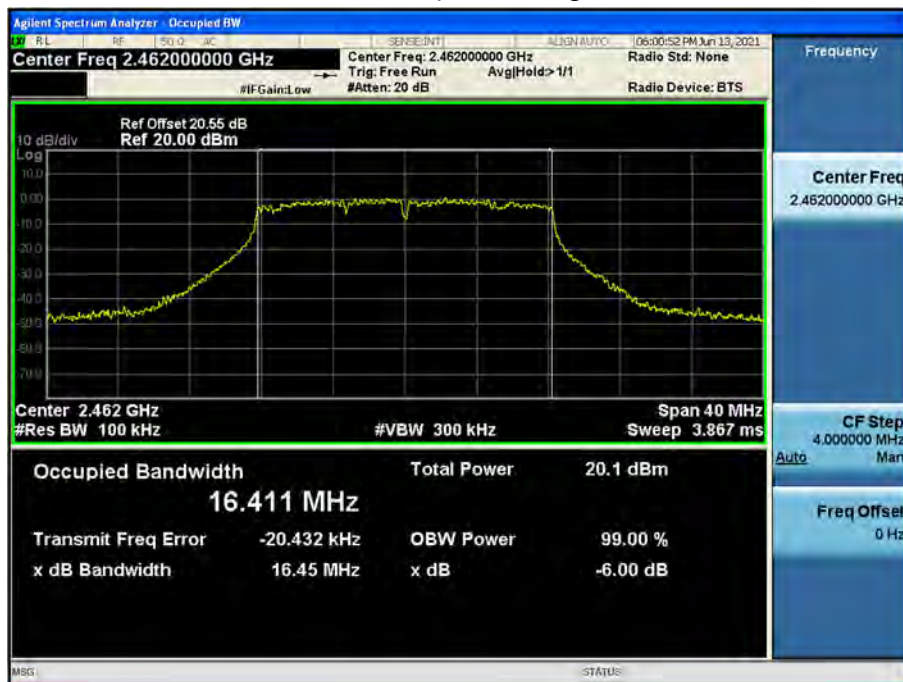

6dB Bandwidth plot (802.11n\_HT20-CH 12)



6dB Bandwidth plot (802.11n\_HT40-CH 9)



**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

[ANT 2]

■ Test Plots

6dB Bandwidth plot (802.11b-CH 12)



6dB Bandwidth plot (802.11g-CH 6)





6dB Bandwidth plot (802.11n\_HT20-CH 11)



6dB Bandwidth plot (802.11n\_HT40-CH 3)



**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

## 99% Bandwidth Measurements(ISED)

### [ANT 1]

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	14.604	N/A
2437	6	14.454	N/A
2462	11	14.439	N/A
2467	12	14.441	N/A
2472	13	14.457	N/A
802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.917	N/A
2437	6	16.909	N/A
2462	11	16.889	N/A
2467	12	16.691	N/A
2472	13	16.467	N/A
802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.830	N/A
2437	6	17.823	N/A
2462	11	17.801	N/A
2467	12	17.787	N/A
2472	13	17.591	N/A
802.11n(HT40) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.063	N/A
2437	6	36.052	N/A
2452	9	36.020	N/A



[ANT 2]

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	14.459	N/A
2437	6	14.450	N/A
2462	11	14.455	N/A
2467	12	14.431	N/A
2472	13	14.457	N/A
802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.548	N/A
2437	6	16.574	N/A
2462	11	16.562	N/A
2467	12	16.547	N/A
2472	13	16.429	N/A
802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.829	N/A
2437	6	17.819	N/A
2462	11	17.839	N/A
2467	12	17.803	N/A
2472	13	17.594	N/A
802.11n(HT40) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.054	N/A
2437	6	36.055	N/A
2452	9	36.051	N/A

▣ Test Plots\_[ANT 1]

99% Bandwidth plot (802.11b-CH 1)



99% Bandwidth plot (802.11g-CH 1)



99% Bandwidth plot (802.11n\_HT20-CH 1)



99% Bandwidth plot (802.11n\_HT40-CH 3)



**Note:**

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

▣ Test Plots\_[ANT 2]

99% Bandwidth plot (802.11b-CH 1)



99% Bandwidth plot (802.11g-CH 6)





99% Bandwidth plot (802.11n\_HT20-CH 11)



99% Bandwidth plot (802.11n\_HT40-CH 6)



**Note:**

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

### 9.3 OUTPUT POWER

#### Peak Power

1. Power Meter offset = Attenuator loss+ Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 20.55 dB is offset for 2.4 GHz Band

802.11b Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	11 Mbps	22.57	30.00	82.00	22.39	30.00	98.00	354.07	25.49	30.00
2437	6	11 Mbps	22.65	30.00	84.00	22.30	30.00	100.00	353.70	25.49	30.00
2462	11	11 Mbps	22.79	30.00	82.00	21.93	30.00	98.00	346.23	25.39	30.00
2467	12	11 Mbps	17.38	30.00	58.00	16.81	30.00	74.00	102.72	20.12	30.00
2472	13	11 Mbps	13.70	30.00	42.00	12.57	30.00	58.00	41.51	16.18	30.00

802.11g Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	9 Mbps	22.61	30.00	59.00	22.23	30.00	75.00	349.43	25.43	30.00
2437	6	9 Mbps	22.92	30.00	65.00	23.02	30.00	81.00	396.36	25.98	30.00
2462	11	9 Mbps	21.61	30.00	67.00	20.81	30.00	73.00	265.23	24.24	30.00
2467	12	9 Mbps	18.36	30.00	44.00	18.32	30.00	60.00	136.51	21.35	30.00
2472	13	9 Mbps	15.96	30.00	33.00	15.50	30.00	49.00	74.95	18.75	30.00

802.11n(HT20) Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	6.5 Mbps	23.06	30.00	63.00	23.32	30.00	79.00	416.98	26.20	30.00
2437	6	6.5 Mbps	23.02	30.00	66.00	23.18	30.00	82.00	408.22	26.11	30.00
2462	11	6.5 Mbps	21.53	30.00	57.00	20.82	30.00	73.00	263.02	24.20	30.00
2467	12	6.5 Mbps	17.61	30.00	41.00	17.69	30.00	57.00	116.32	20.66	30.00
2472	13	6.5 Mbps	9.83	30.00	5.00	8.63	30.00	21.00	16.91	12.28	30.00

802.11n(HT40) Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2422	3	13.5 Mbps	21.36	30.00	52.00	20.09	30.00	68.00	238.85	23.78	30.00
2437	6	13.5 Mbps	22.84	30.00	65.00	23.15	30.00	81.00	398.74	26.01	30.00
2452	9	13.5 Mbps	19.32	30.00	48.00	19.44	30.00	64.00	173.43	22.39	30.00

### Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 20.55 dB is offset for 2.4 GHz Band.

802.11b Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	11 Mbps	17.20	30.00	82.00	16.79	30.00	98.00	100.19	20.01	30.00
2437	6	11 Mbps	17.09	30.00	84.00	16.72	30.00	100.00	98.23	19.92	30.00
2462	11	11 Mbps	17.22	30.00	82.00	16.32	30.00	98.00	95.65	19.81	30.00
2467	12	11 Mbps	11.78	30.00	58.00	11.06	30.00	74.00	27.82	14.44	30.00
2472	13	11 Mbps	8.12	30.00	42.00	7.03	30.00	58.00	11.54	10.62	30.00

802.11g Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	9 Mbps	14.65	30.00	59.00	14.36	30.00	75.00	56.43	17.52	30.00
2437	6	9 Mbps	15.04	30.00	65.00	15.13	30.00	81.00	64.52	18.10	30.00
2462	11	9 Mbps	13.75	30.00	67.00	12.99	30.00	73.00	43.61	16.40	30.00
2467	12	9 Mbps	10.76	30.00	44.00	10.56	30.00	60.00	23.30	13.67	30.00
2472	13	9 Mbps	8.40	30.00	33.00	7.68	30.00	49.00	12.78	11.07	30.00



802.11n(HT20) Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	6.5 Mbps	15.13	30.00	63.00	15.29	30.00	79.00	66.43	18.22	30.00
2437	6	6.5 Mbps	15.07	30.00	66.00	15.19	30.00	82.00	65.14	18.14	30.00
2462	11	6.5 Mbps	13.56	30.00	57.00	12.91	30.00	73.00	42.24	16.26	30.00
2467	12	6.5 Mbps	9.82	30.00	41.00	9.70	30.00	57.00	18.92	12.77	30.00
2472	13	6.5 Mbps	2.06	30.00	5.00	0.96	30.00	21.00	2.85	4.55	30.00

802.11n(HT40) Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2422	3	13.5 Mbps	13.28	30.00	52.00	12.23	30.00	68.00	38.01	15.80	30.00
2437	6	13.5 Mbps	15.03	30.00	65.00	15.33	30.00	81.00	66.03	18.20	30.00
2452	9	13.5 Mbps	11.52	30.00	48.00	11.51	30.00	64.00	28.33	14.52	30.00

## 9.4 POWER SPECTRAL DENSITY

[Ant.1]

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm/3 kHz)	Limit (dBm/3 kHz)
802.11b	2412	1	-6.489	8
	2437	6	-6.351	
	2462	11	-6.211	
	2467	12	-11.756	
	2472	13	-15.427	
802.11g	2412	1	-13.764	
	2437	6	-13.207	
	2462	11	-14.552	
	2467	12	-17.420	
	2472	13	-19.990	
802.11n(HT20)	2412	1	-11.522	
	2437	6	-12.221	
	2462	11	-14.029	
	2467	12	-17.612	
	2472	13	-25.583	
802.11n(HT40)	2422	3	-15.694	
	2437	6	-13.360	
	2452	9	-17.571	

[Ant.2]

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm/3 kHz)	Limit (dBm/3 kHz)
802.11b	2412	1	-6.772	8
	2437	6	-6.771	
	2462	11	-7.001	
	2467	12	-12.552	
	2472	13	-16.575	
802.11g	2412	1	-13.874	
	2437	6	-12.929	
	2462	11	-15.119	
	2467	12	-17.766	
	2472	13	-20.986	
802.11n(HT20)	2412	1	-12.099	
	2437	6	-12.086	
	2462	11	-14.238	
	2467	12	-18.164	
	2472	13	-26.626	
802.11n(HT40)	2422	3	-16.561	
	2437	6	-12.765	
	2452	9	-17.817	

[MIMO]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Ant 1 Measured Power (dBm/3 kHz)	Ant 2 Measured Power (dBm/3 kHz)	MIMO (Ant 1 + Ant 2) (dBm/3 kHz)	Limit (dBm/3 kHz)
802.11b	2412	1	-6.489	-6.772	-3.665	8
	2437	6	-6.351	-6.771	-3.565	
	2462	11	-6.211	-7.001	-3.565	
	2467	12	-11.756	-12.552	-8.861	
	2472	13	-15.427	-16.575	-13.010	
802.11g	2412	1	-13.764	-13.874	-10.969	
	2437	6	-13.207	-12.929	-10.000	
	2462	11	-14.552	-15.119	-11.549	
	2467	12	-17.420	-17.766	-13.979	
	2472	13	-19.990	-20.986	-16.990	
802.11n(HT20)	2412	1	-11.522	-12.099	-8.861	
	2437	6	-12.221	-12.086	-9.208	
	2462	11	-14.029	-14.238	-10.969	
	2467	12	-17.612	-18.164	-13.979	
	2472	13	-25.583	-26.626	-23.010	
802.11n(HT40)	2422	3	-15.694	-16.561	-13.010	
	2437	6	-13.360	-12.765	-10.000	
	2452	9	-17.571	-17.817	-13.979	

**Note :**

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.


2. Spectrum offset = Attenuator loss(20 dB) + Cable loss(1ea)

3. 20.55 dB is offset for 2.4 GHz Band.


[Ant1]

▣ Test Plots


Power Spectral Density (802.11b-CH 11)

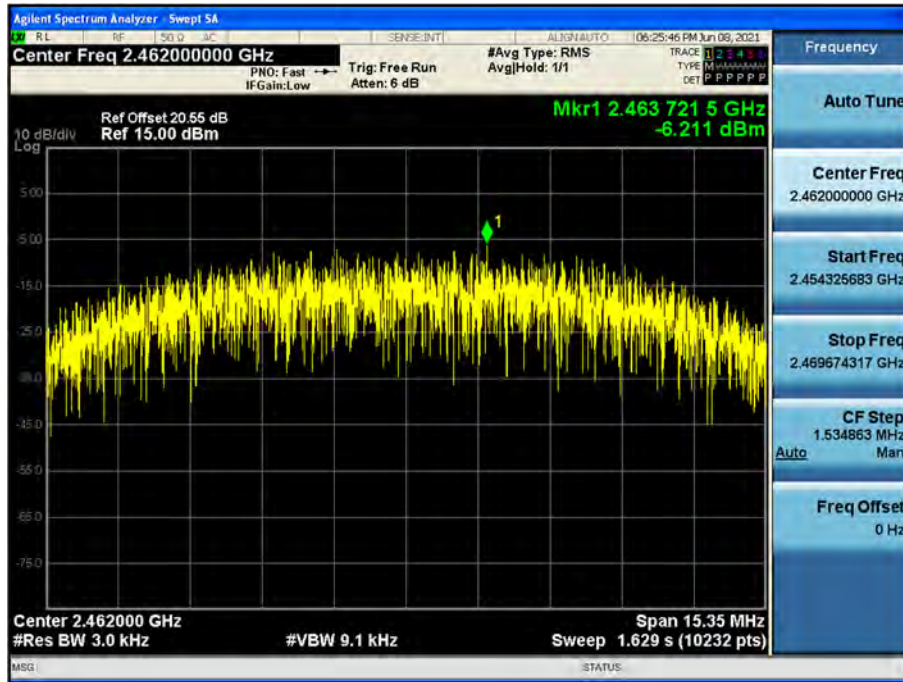


Power Spectral Density (802.11g-CH 6)

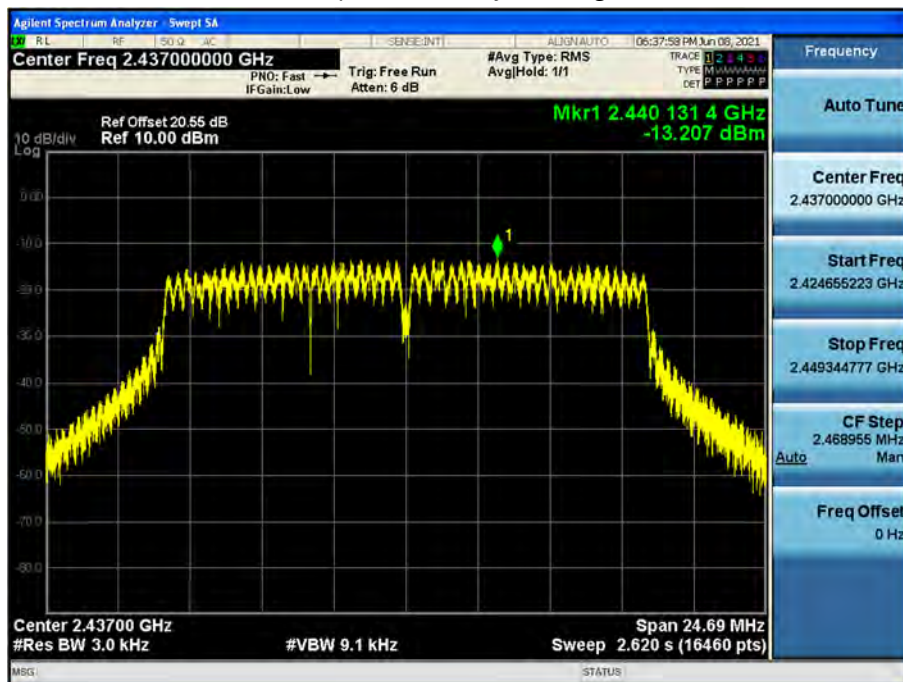

Power Spectral Density (802.11n\_HT20 -CH 1)

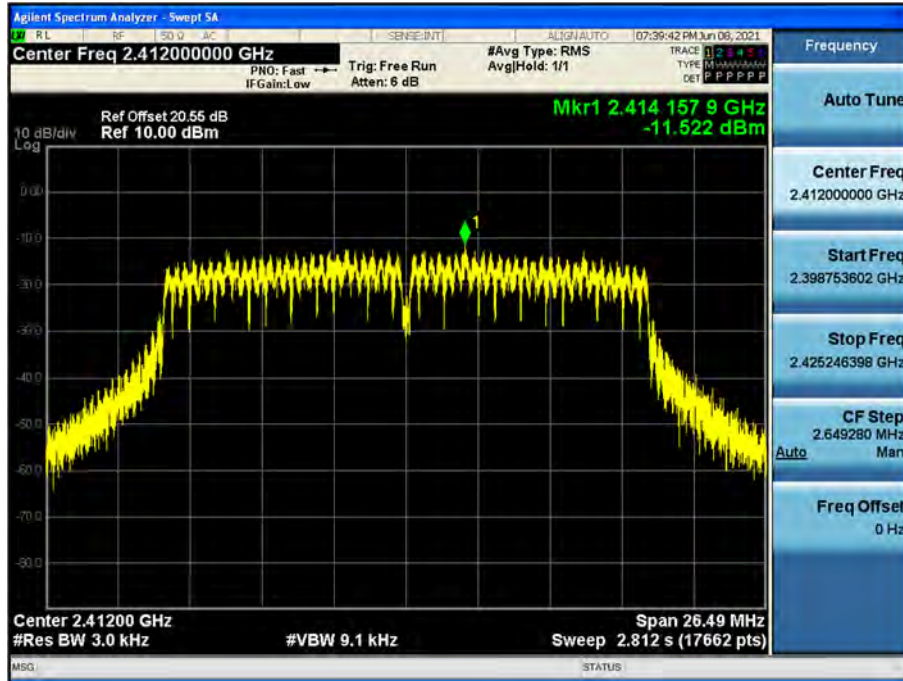

Power Spectral Density (802.11n\_HT40 -CH 6)

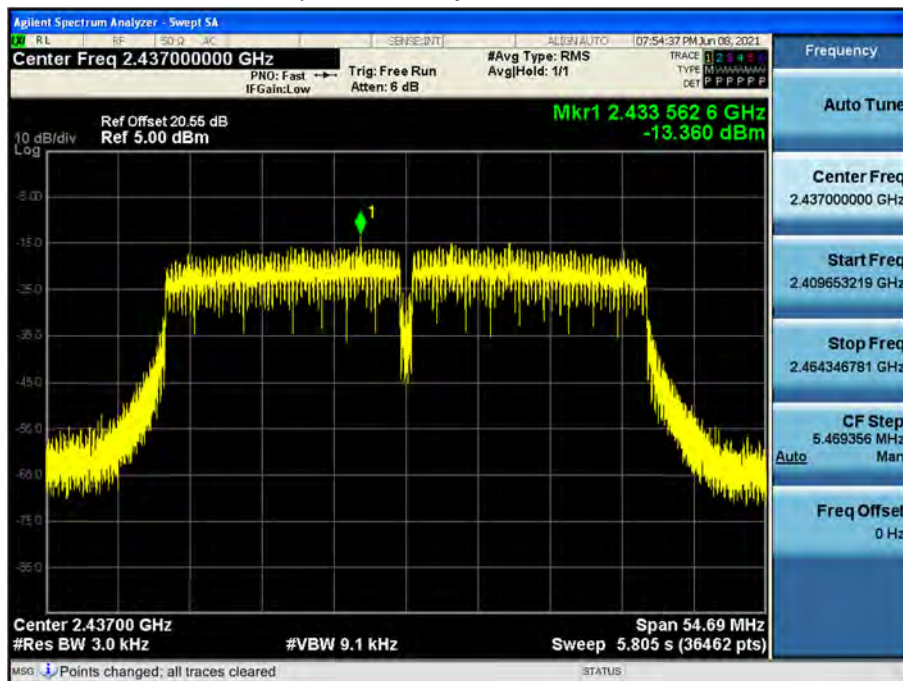

**Note :**


In order to simplify the report, attached plots were only the worstcase PSD channel.




[Ant2]

▣ Test Plots


Power Spectral Density (802.11b-CH 6)

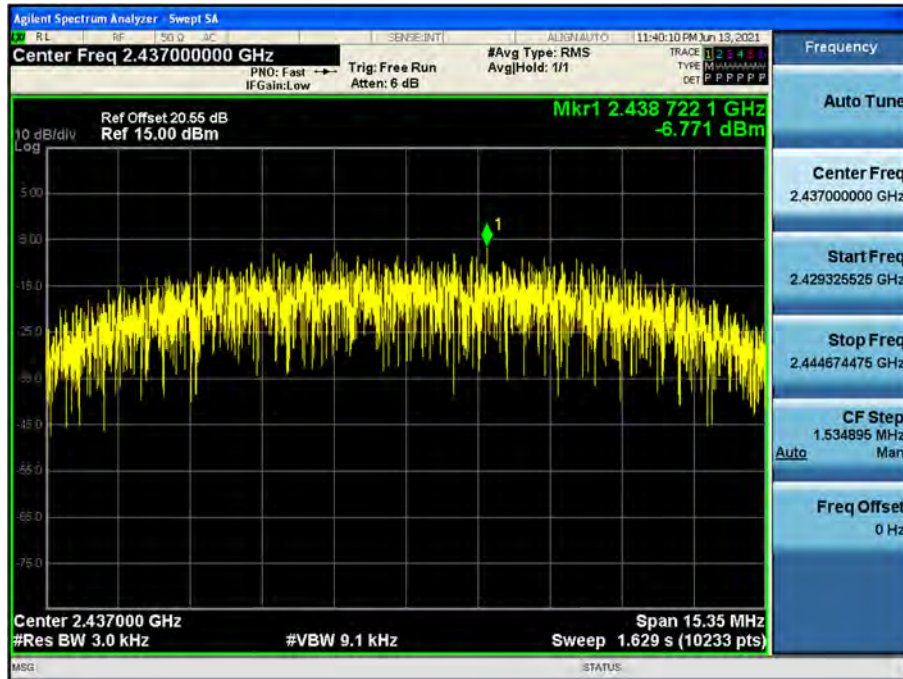


Power Spectral Density (802.11g-CH 6)

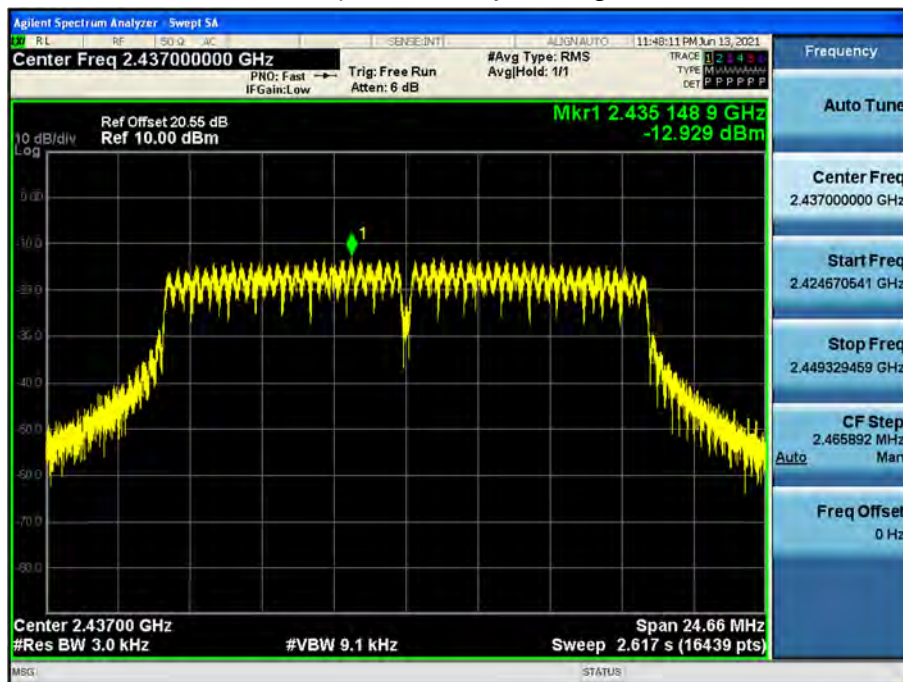

Power Spectral Density (802.11n\_HT20 -CH 6)

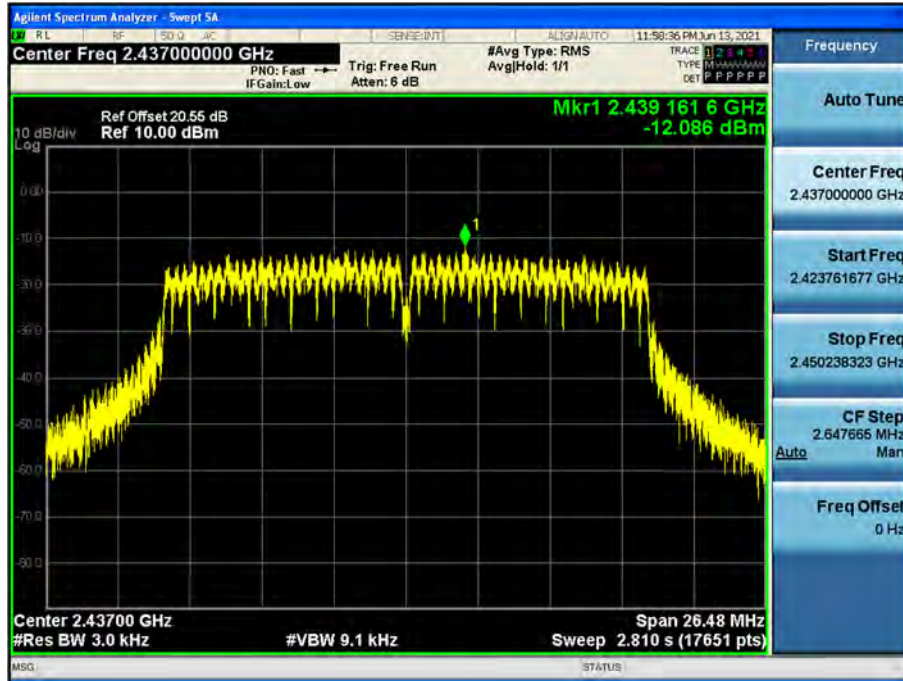

Power Spectral Density (802.11n\_HT40 -CH 6)

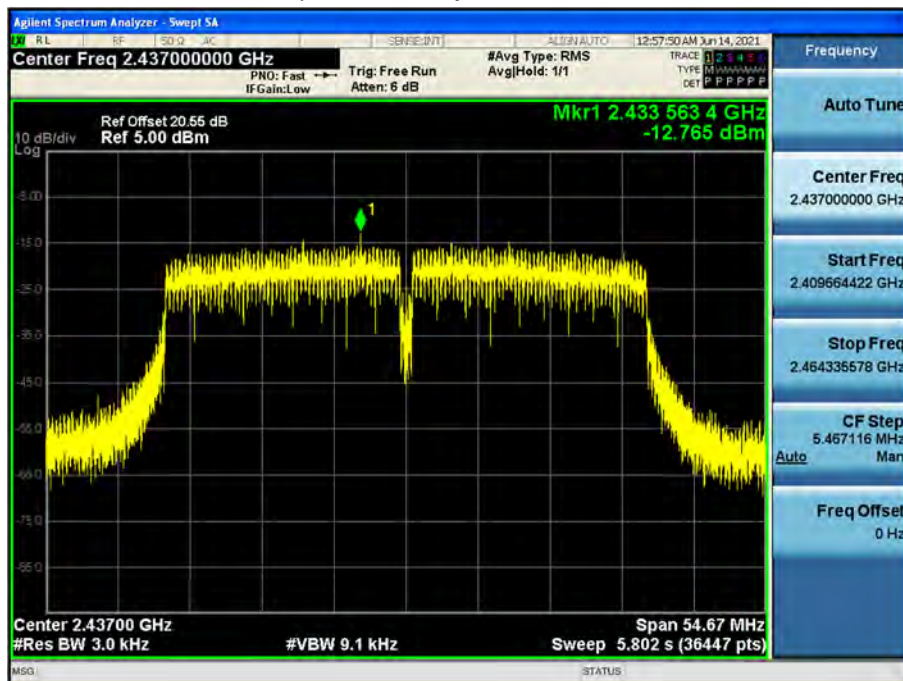

**Note :**

In order to simplify the report, attached plots were only the worstcase PSD channel.



## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

[ANT1]

▣ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

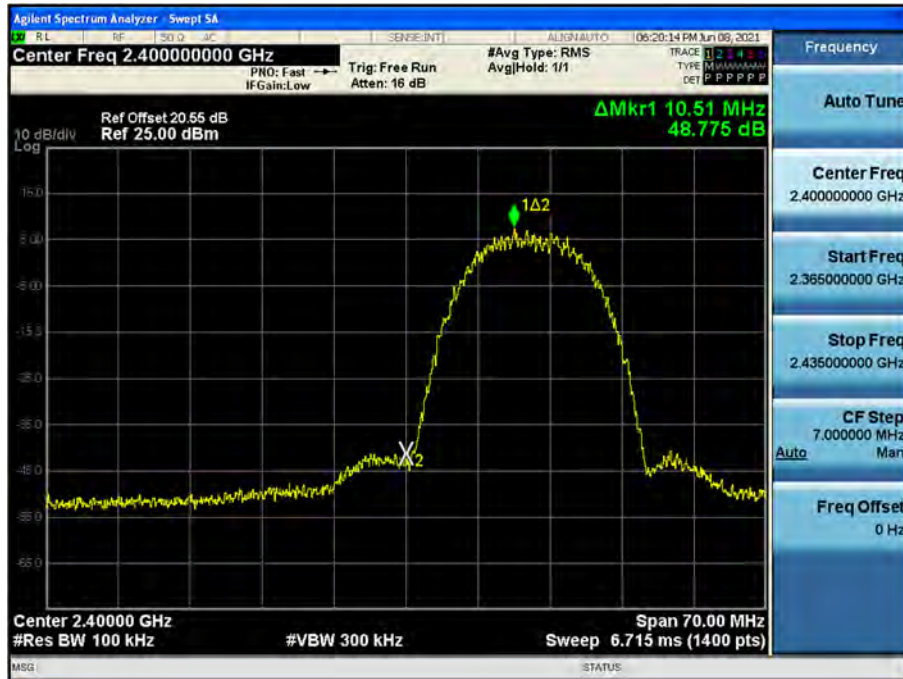


Band Edge (802.11b-CH11)




Band Edge (802.11b-CH12)

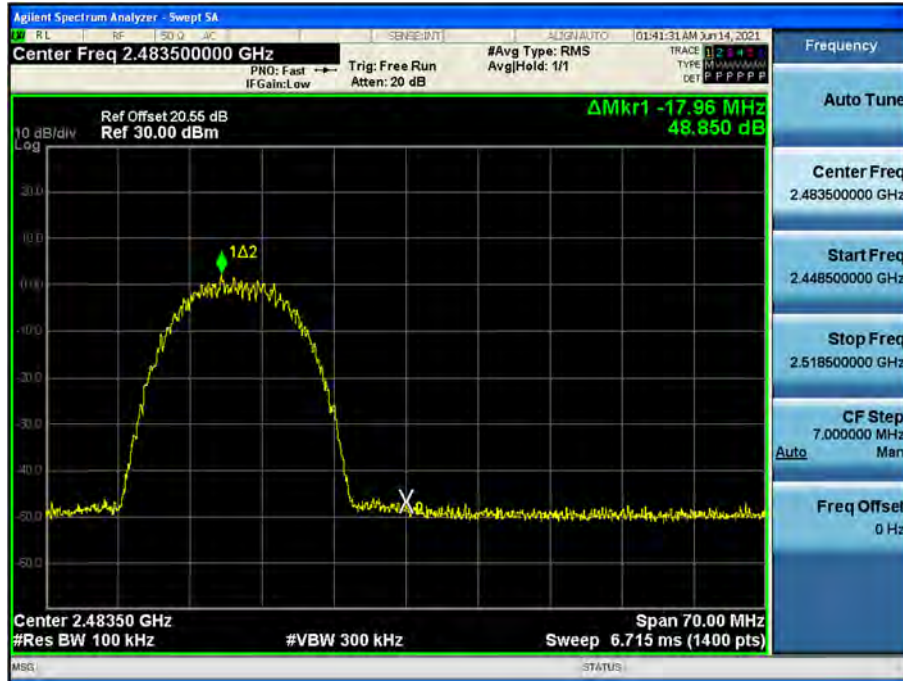

Band Edge (802.11b-CH13)

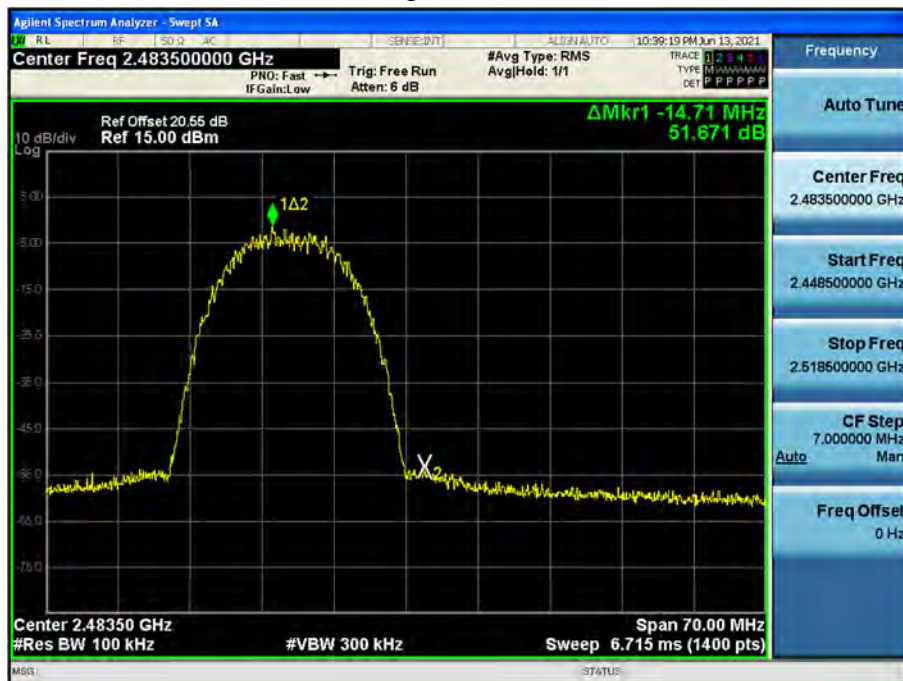

Band Edge (802.11g-CH1)

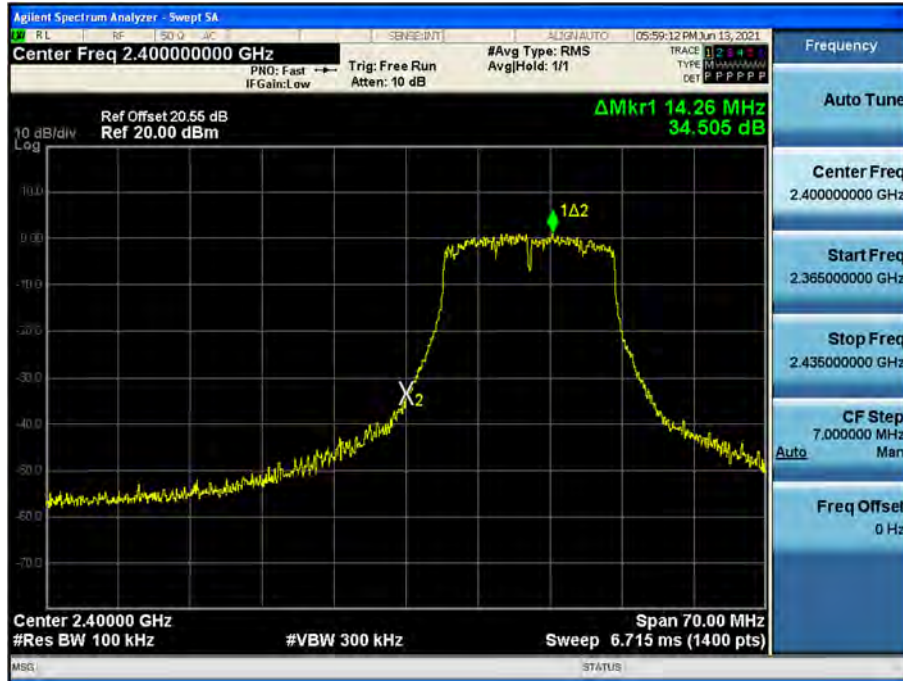


Band Edge (802.11g-CH11)






Band Edge (802.11g-CH12)

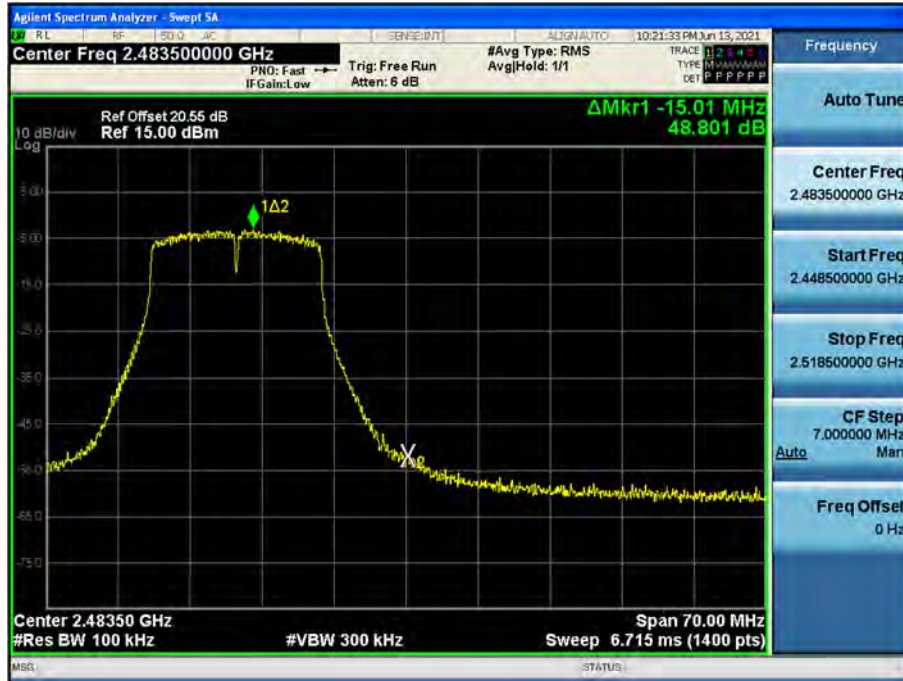


Band Edge (802.11g-CH13)



Band Edge (802.11n\_HT20 -CH1)

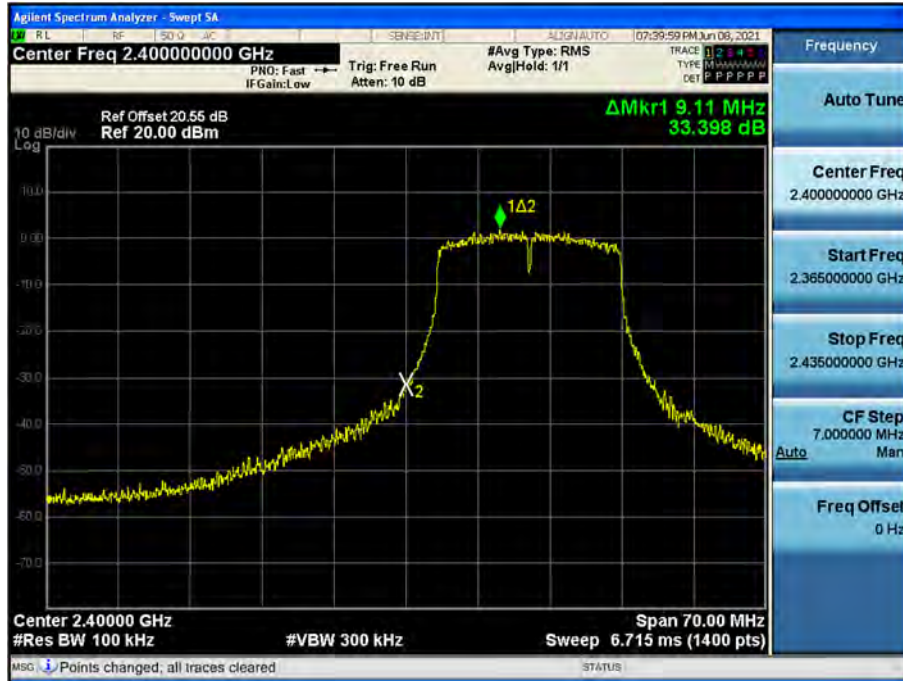


Band Edge (802.11n\_HT20 -CH11)

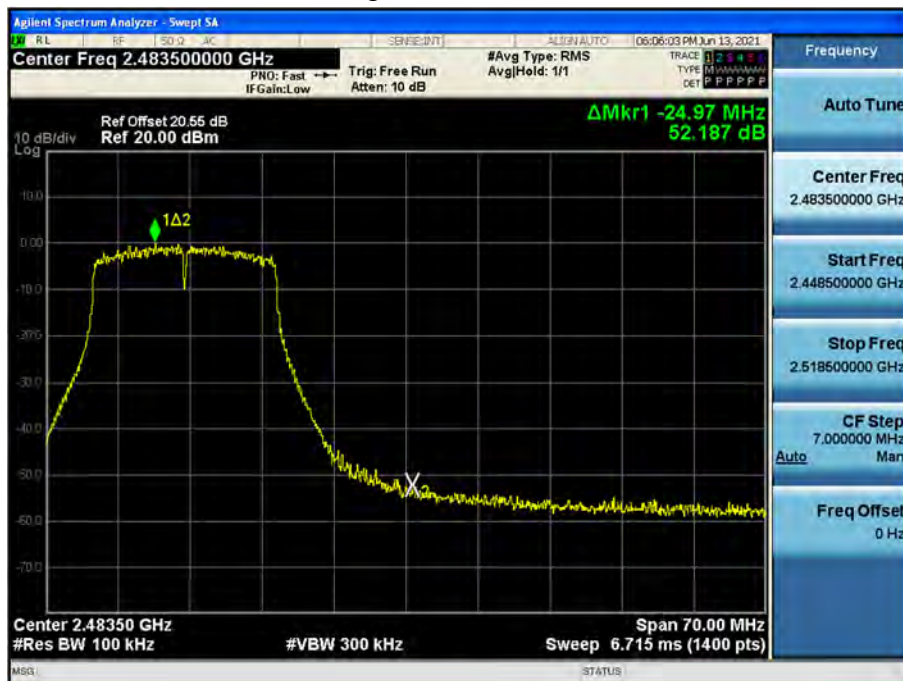

Band Edge (802.11n\_HT20 -CH12)




Band Edge (802.11n\_HT20 -CH13)

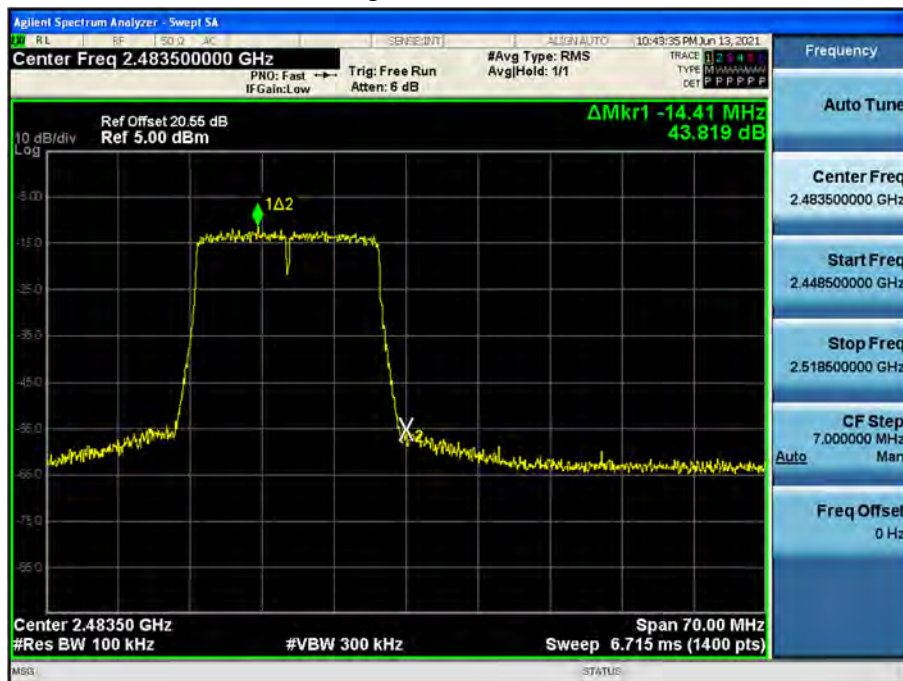




Band Edge (802.11n\_HT40 -CH3)

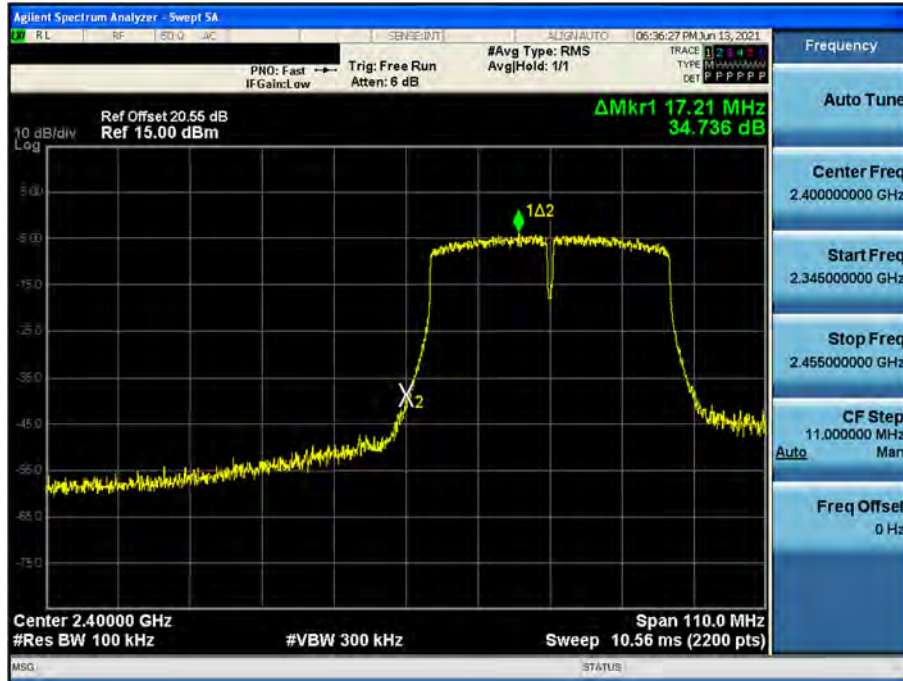

Band Edge (802.11n\_HT40 -CH9)

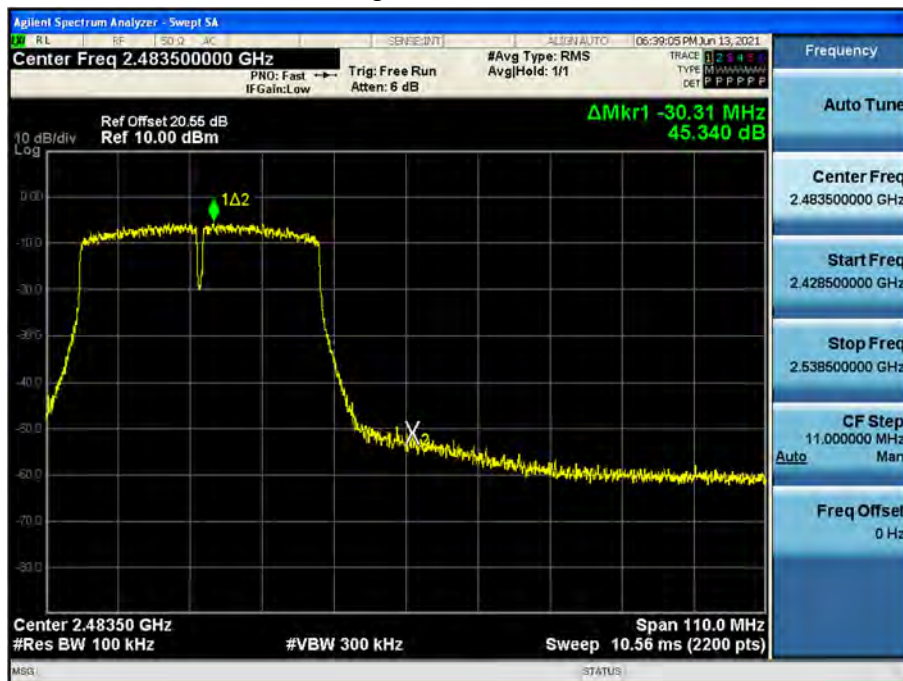




## □ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

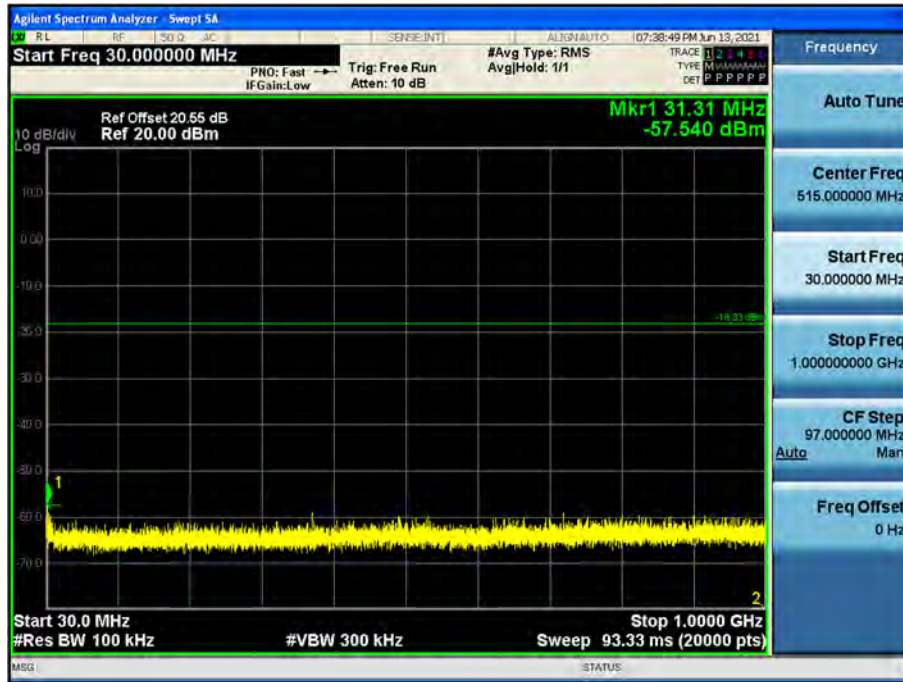


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

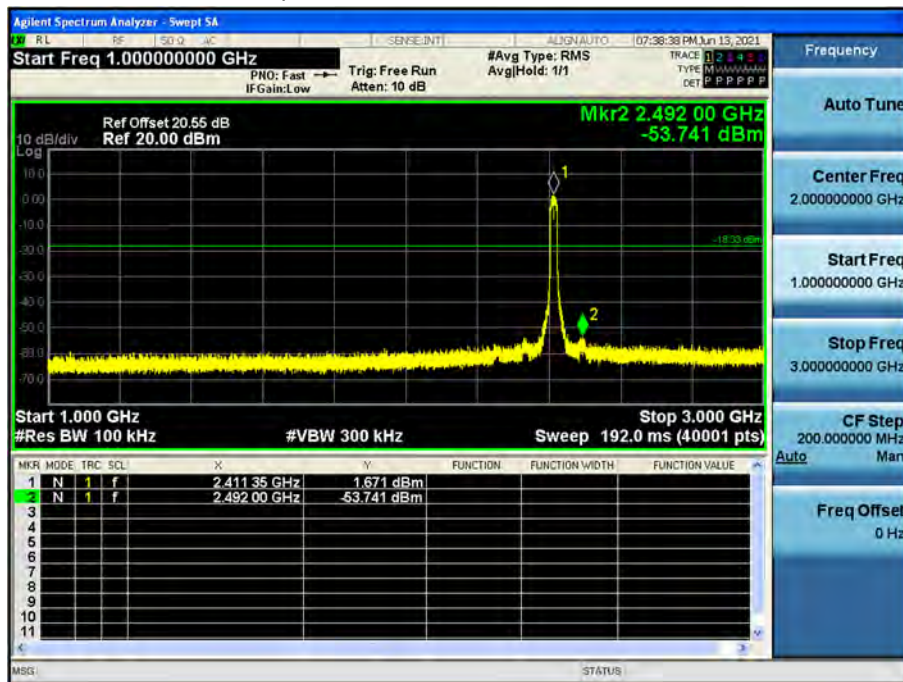


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

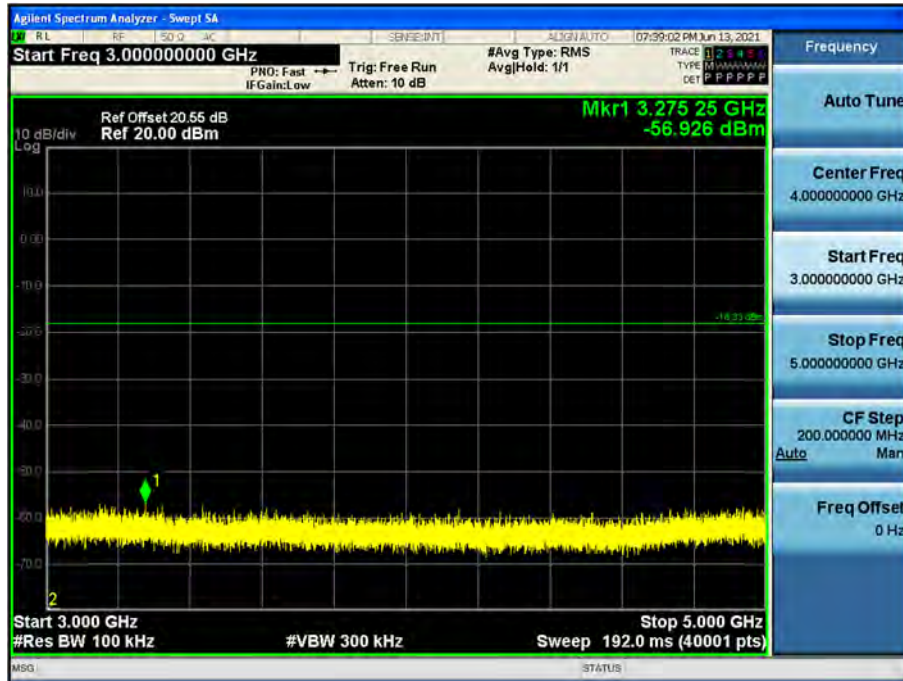


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

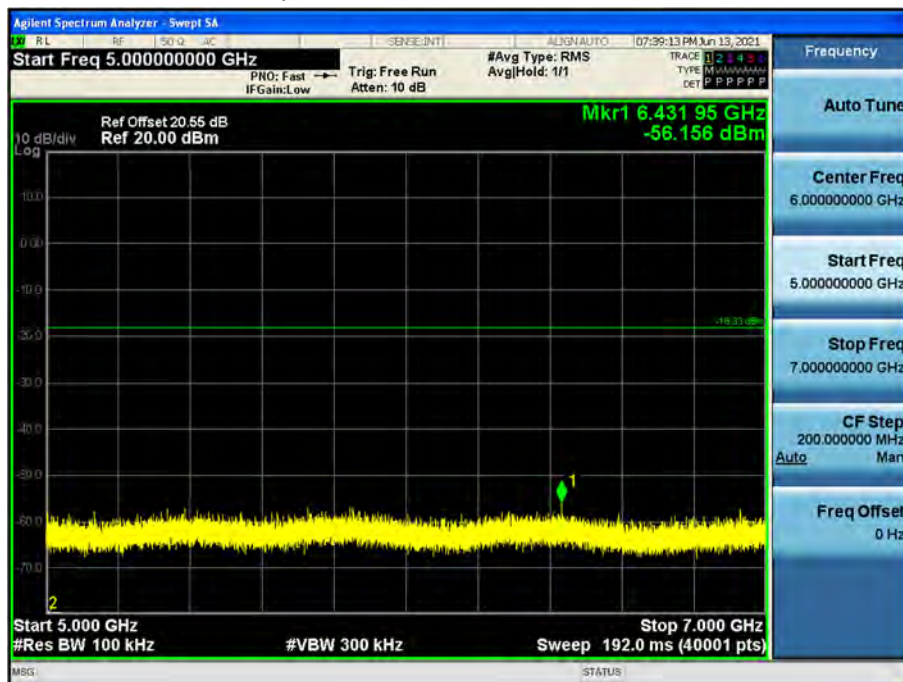


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

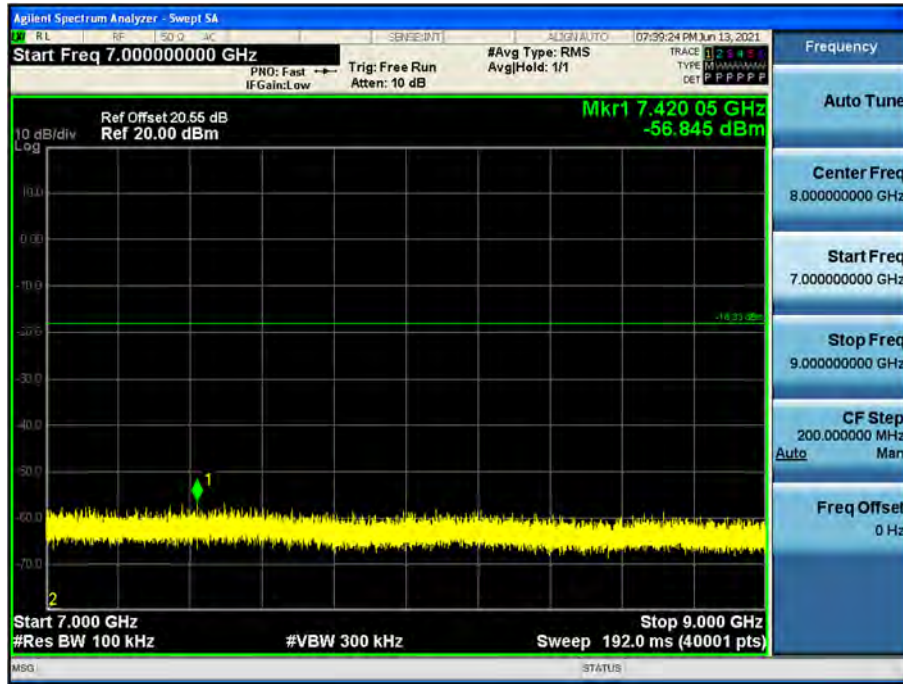

9 GHz ~ 11 GHz


Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

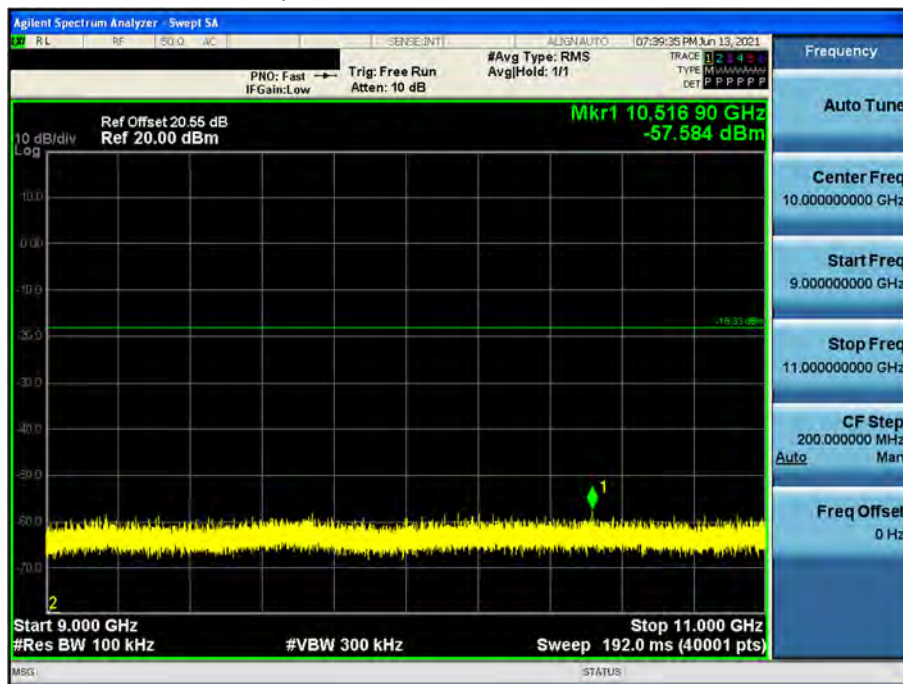




11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

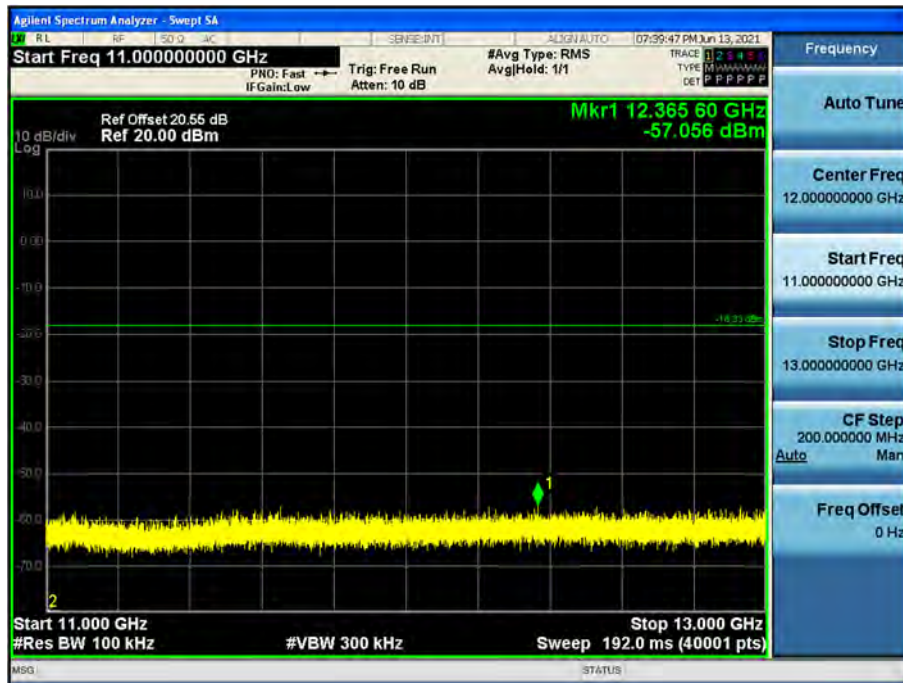


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

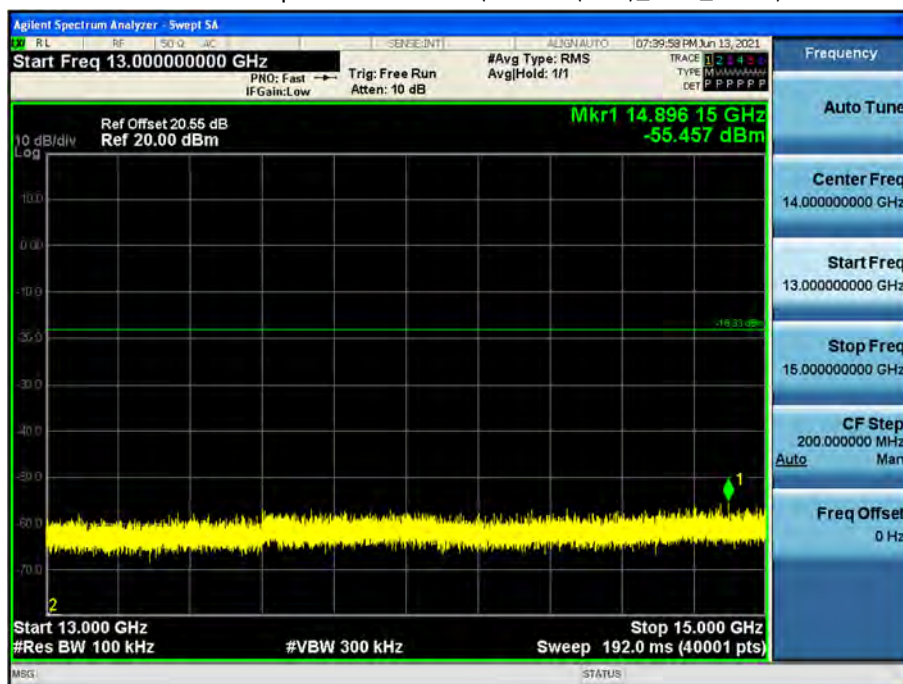


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

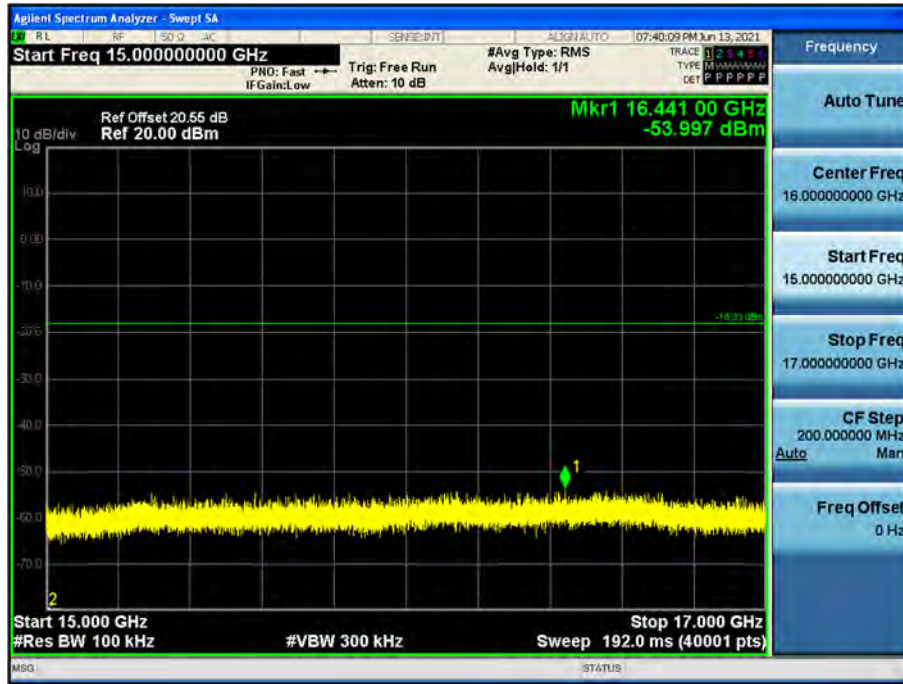


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

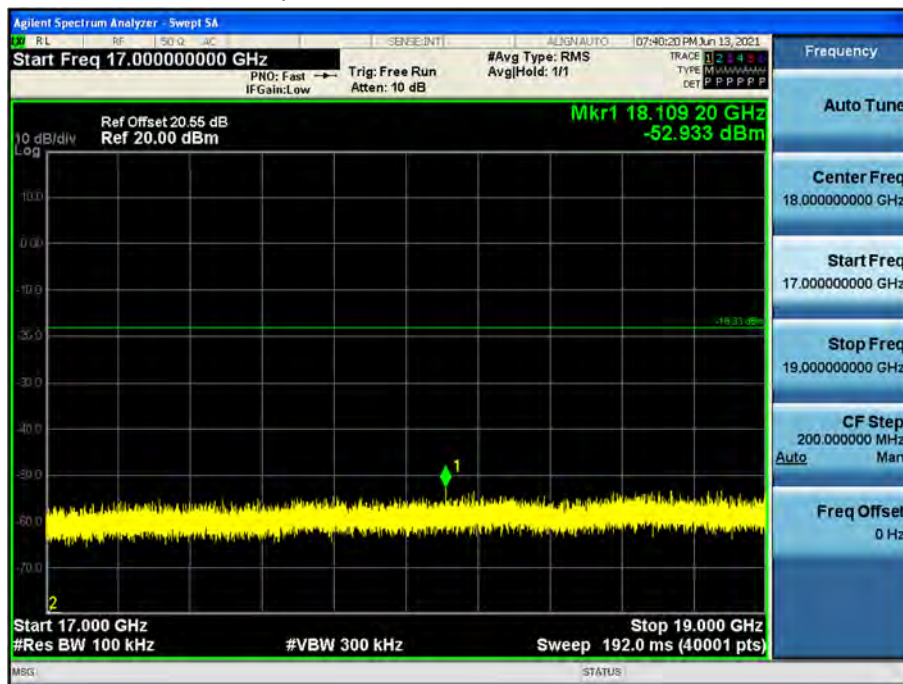

19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

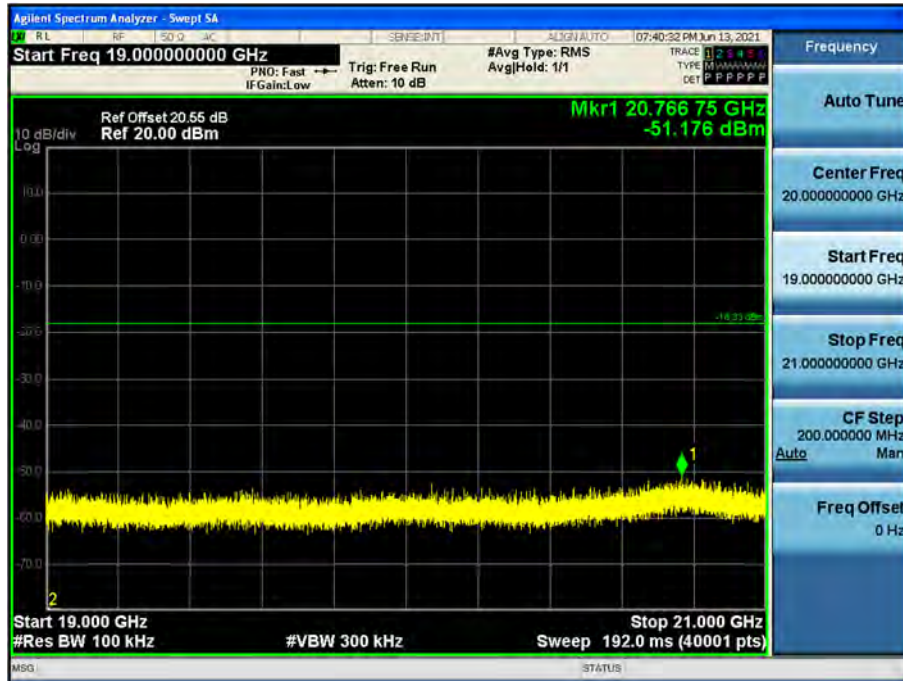


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)



23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

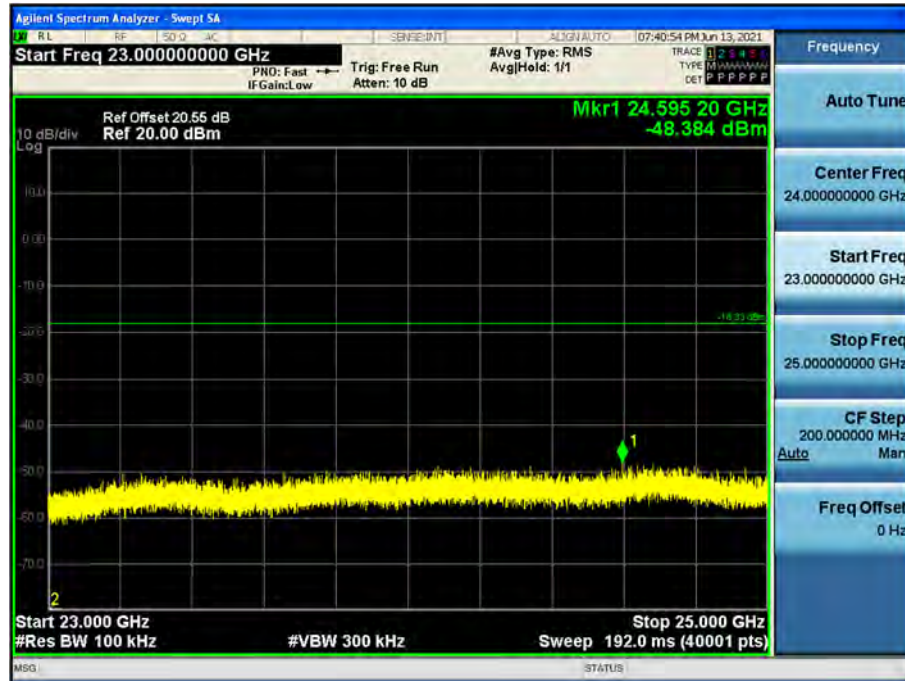

**Note:**

Limit : -18.33 dBm



[ANT2]

▣ Test Plots(BandEdge)

Band Edge (802.11b-CH1)



Band Edge (802.11b-CH11)






Band Edge (802.11b-CH12)



Band Edge (802.11b-CH13)

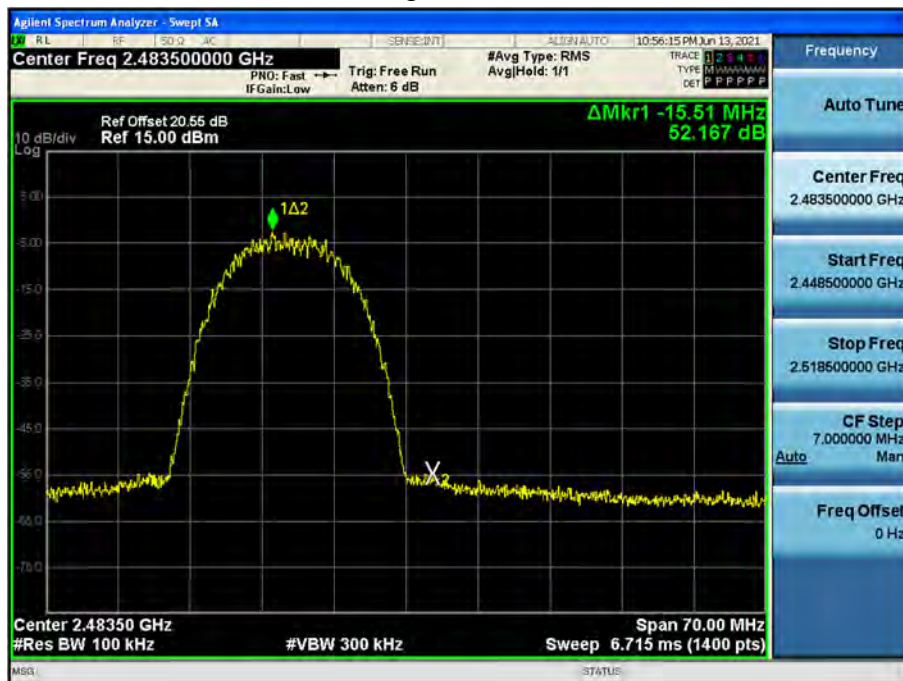

Band Edge (802.11g-CH1)



Band Edge (802.11g-CH11)



Band Edge (802.11g-CH12)



Band Edge (802.11g-CH13)





Band Edge (802.11n\_HT20 -CH1)




Band Edge (802.11n\_HT20 -CH11)



Band Edge (802.11n\_HT20 -CH12)



Band Edge (802.11n\_HT20 -CH13)

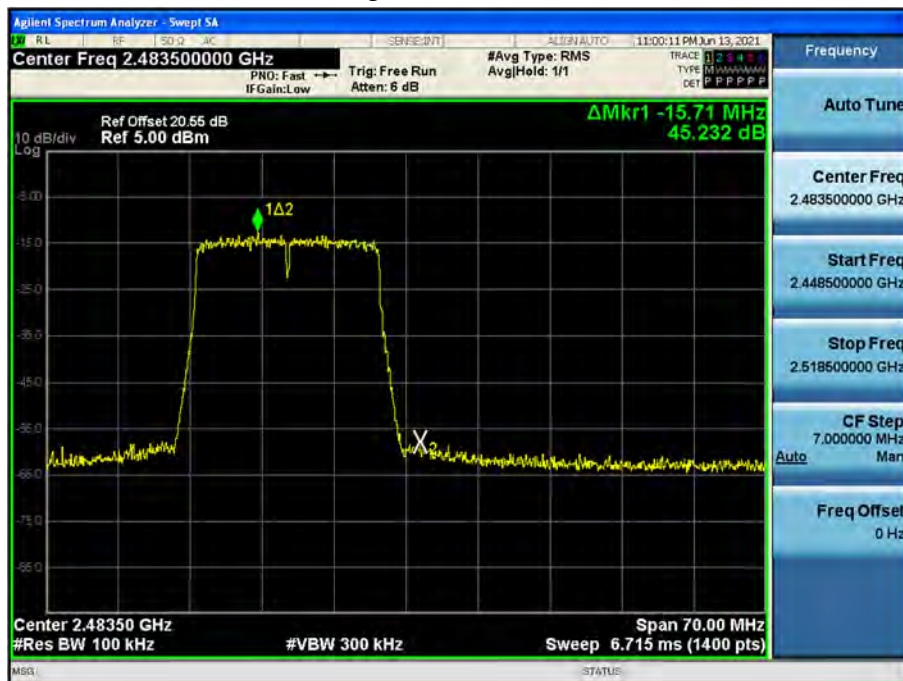

Band Edge (802.11n\_HT40 -CH3)



Band Edge (802.11n\_HT40 -CH9)






## □ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

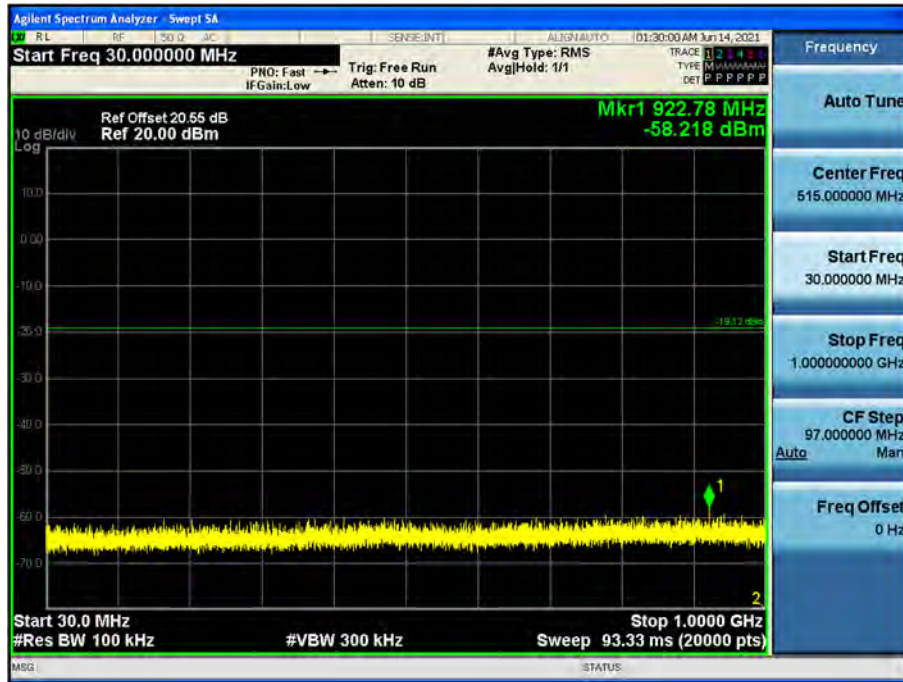


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

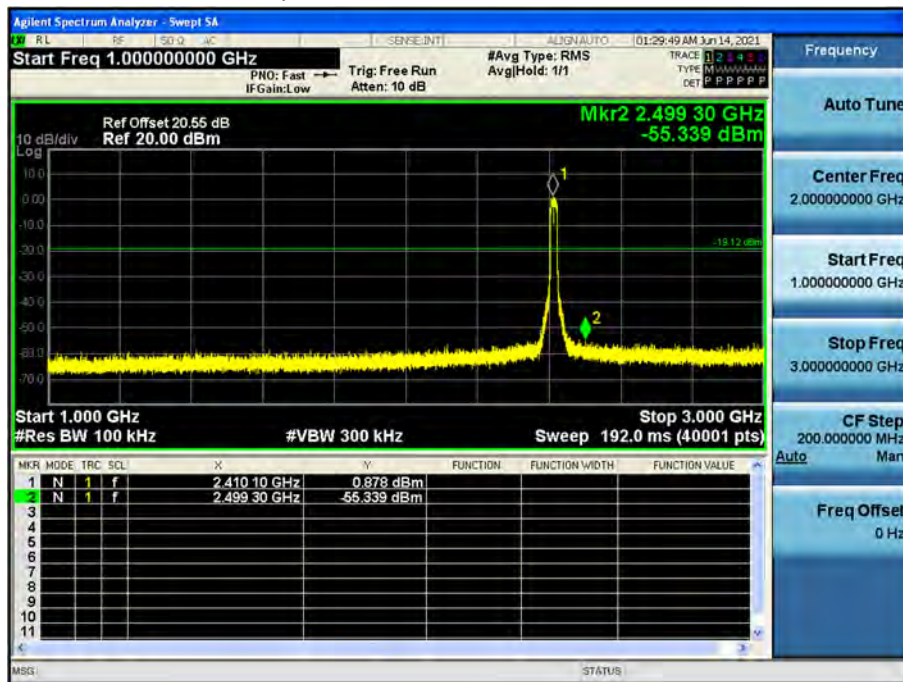


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

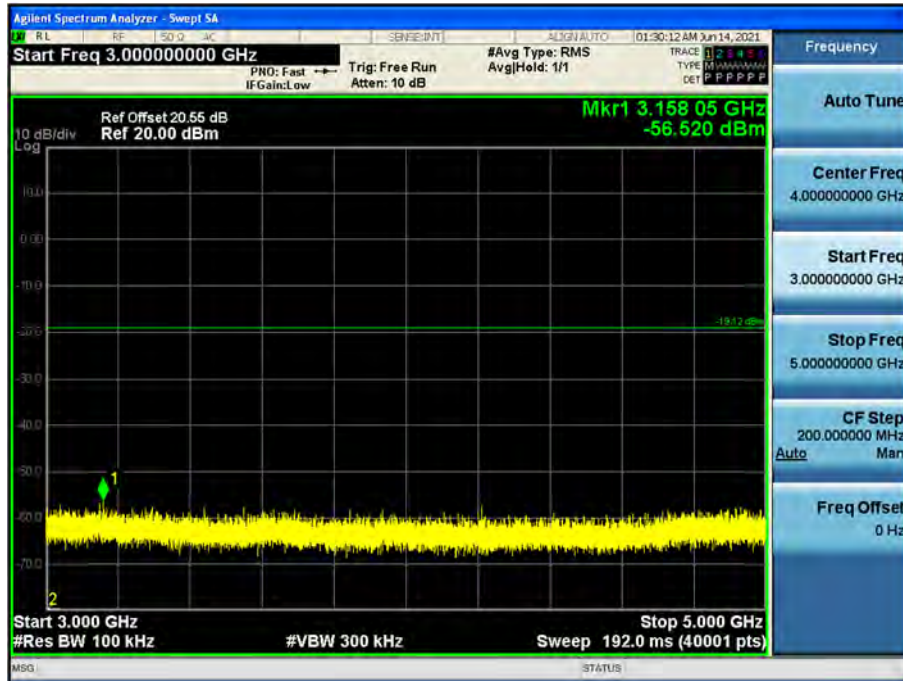

5 GHz ~ 7 GHz


Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

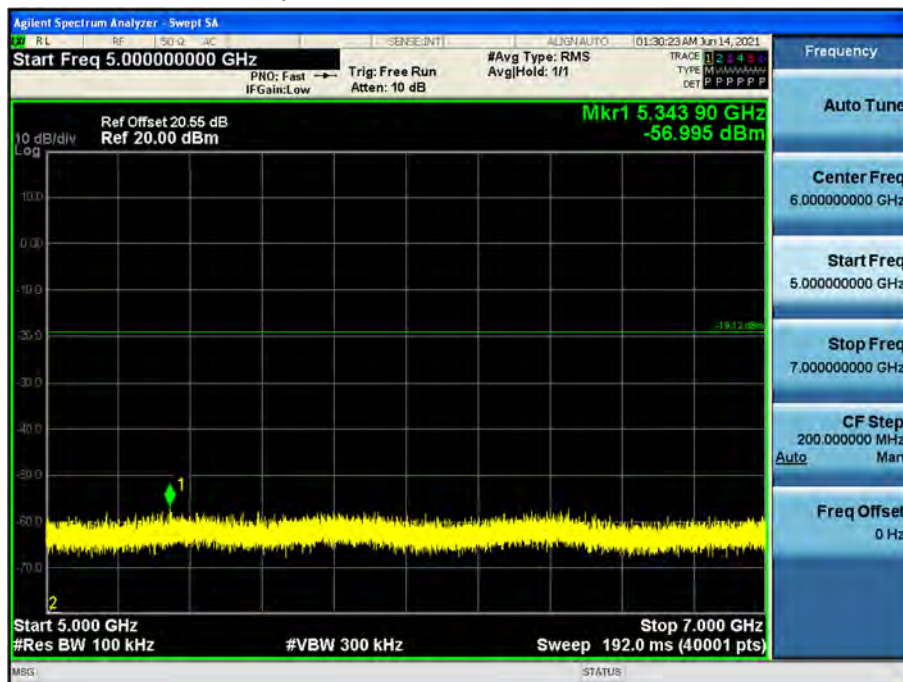




7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

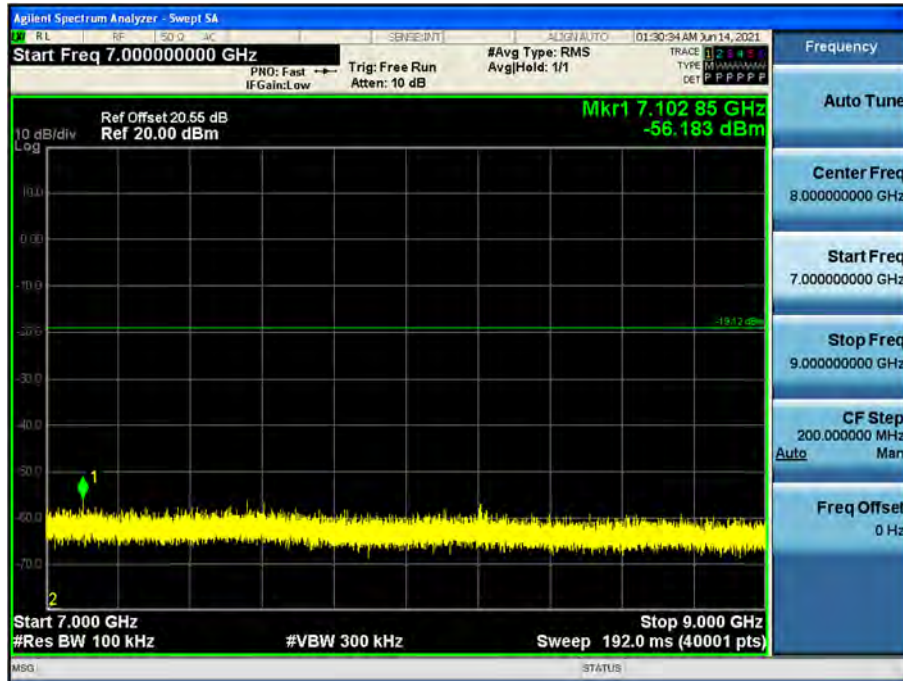


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

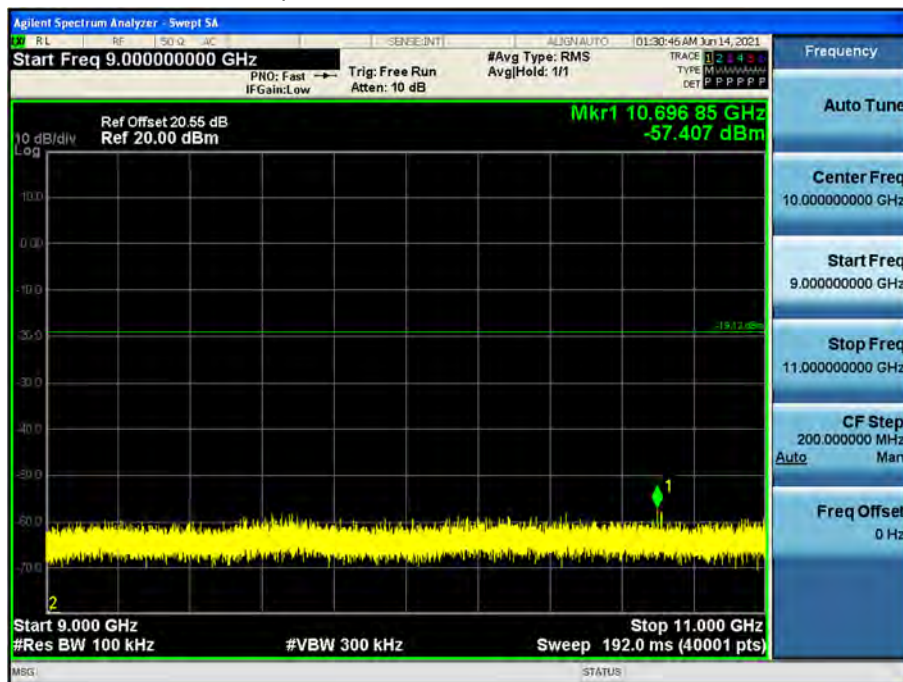


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

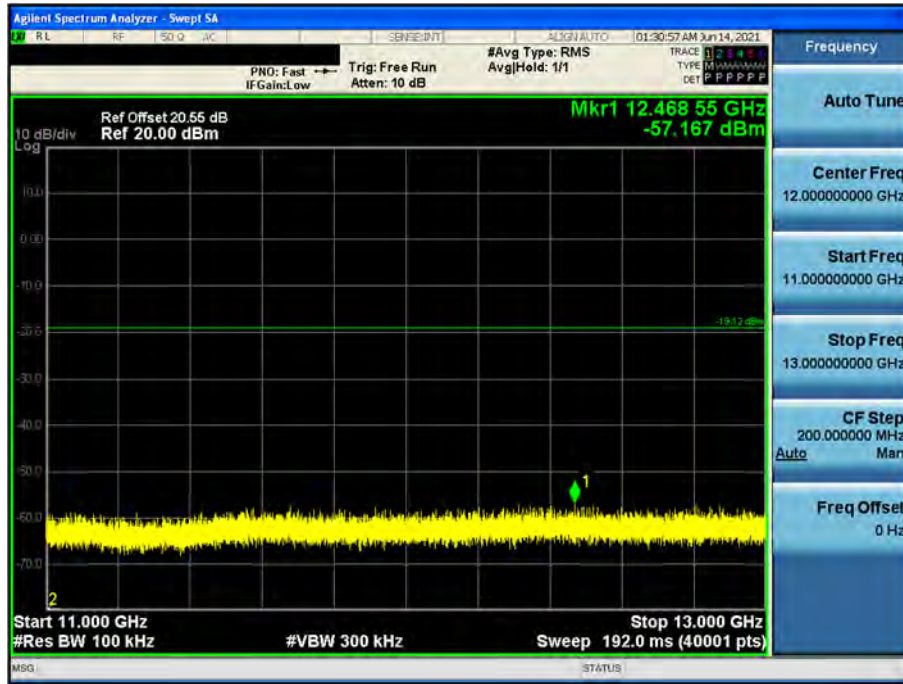


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

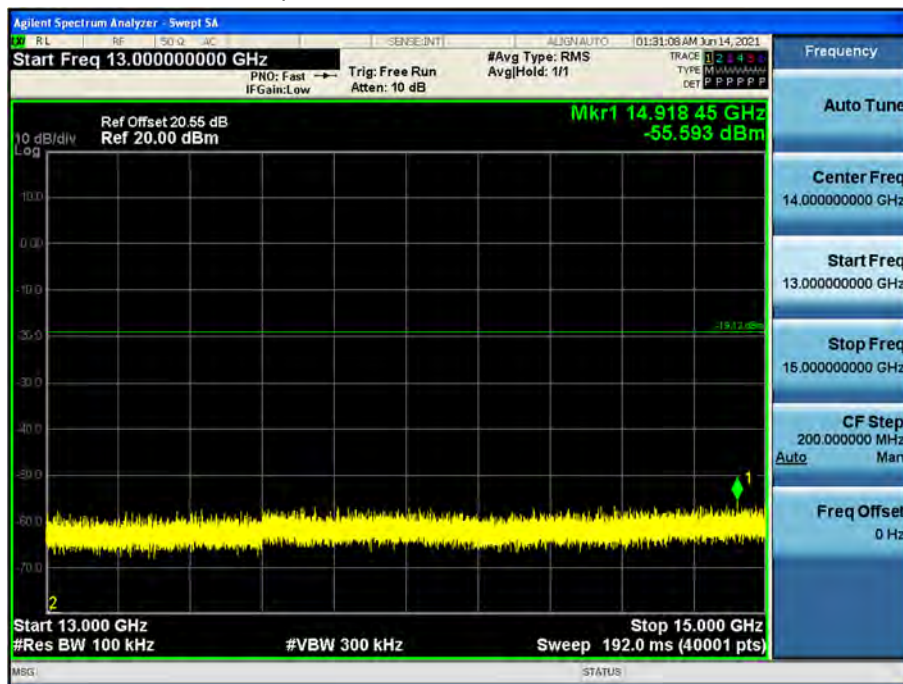


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

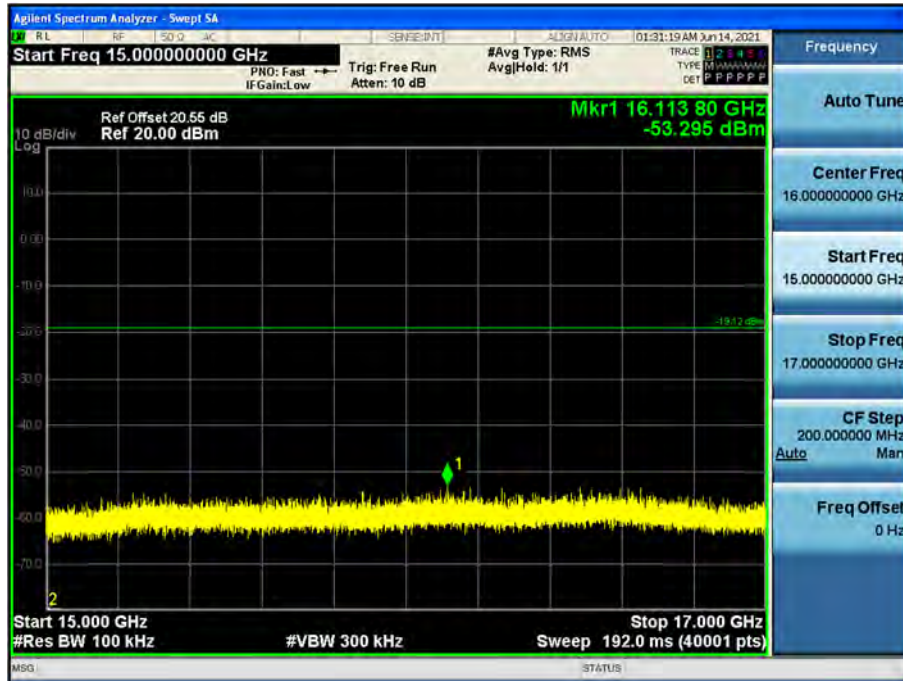

17 GHz ~ 19 GHz


Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

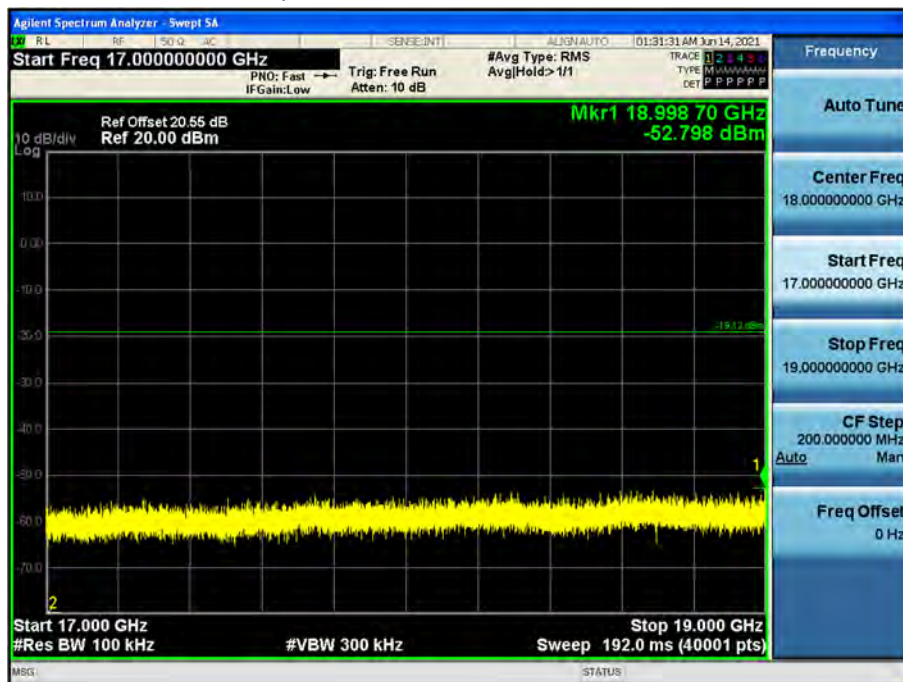




19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

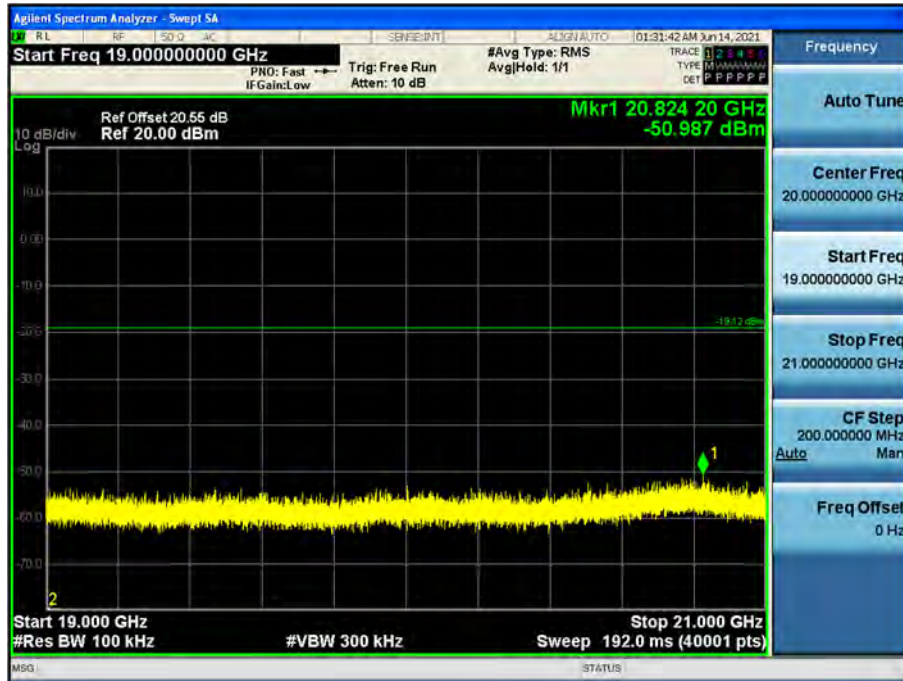

21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)

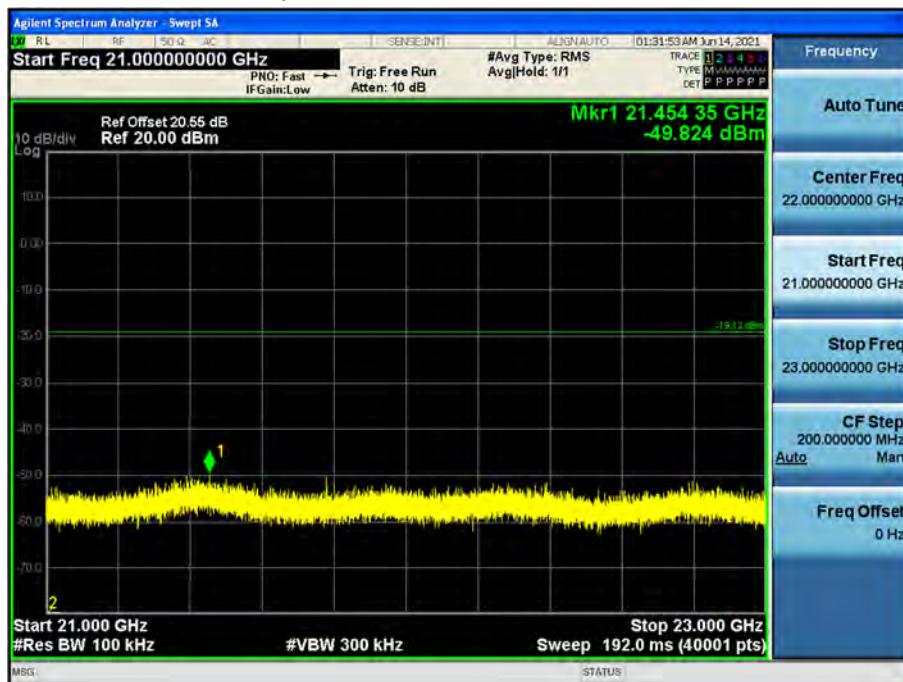

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11n(20M)\_Ch.1\_MCS0)



Note:

Limit : -19.12 dBm

## 9.6 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

#### Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

#### Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

[Only MIMO]

Frequency Range : Above 1 GHz

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4824	45.09	3.62	V	48.71	73.98	25.27	PK
4824	37.68	3.62	V	41.30	53.98	12.68	AV
7236	40.82	9.26	V	50.08	73.98	23.90	PK
7236	28.97	9.26	V	38.23	53.98	15.75	AV
4824	45.71	3.62	H	49.33	73.98	24.65	PK
4824	38.59	3.62	H	42.21	53.98	11.77	AV
7236	40.72	9.26	H	49.98	73.98	24.00	PK
7236	29.15	9.26	H	38.41	53.98	15.57	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4874	45.75	3.36	V	49.11	73.98	24.87	PK
4874	39.07	3.36	V	42.43	53.98	11.55	AV
7311	40.28	10.27	V	50.55	73.98	23.43	PK
7311	28.12	10.27	V	38.39	53.98	15.59	AV
4874	46.15	3.36	H	49.51	73.98	24.47	PK
4874	40.10	3.36	H	43.46	53.98	10.52	AV
7311	40.89	10.27	H	51.16	73.98	22.82	PK
7311	28.42	10.27	H	38.69	53.98	15.29	AV

Operation Mode:	802.11b
Transfer MCS Index:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4924	45.05	2.80	V	47.85	73.98	26.13	PK
4924	38.79	2.80	V	41.59	53.98	12.39	AV
7386	39.75	11.07	V	50.82	73.98	23.16	PK
7386	27.28	11.07	V	38.35	53.98	15.63	AV
4924	45.63	2.80	H	48.43	73.98	25.55	PK
4924	39.52	2.80	H	42.32	53.98	11.66	AV
7386	40.01	11.07	H	51.08	73.98	22.90	PK
7386	27.91	11.07	H	38.98	53.98	15.00	AV

**Note:**

All Modes of operation were investigated and the worst case configuration results are reported.


[Worst case]

- Worstcase : 802.11b




## Test Plots (Worst case : Z-H)

### Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.6 2nd Harmonic)

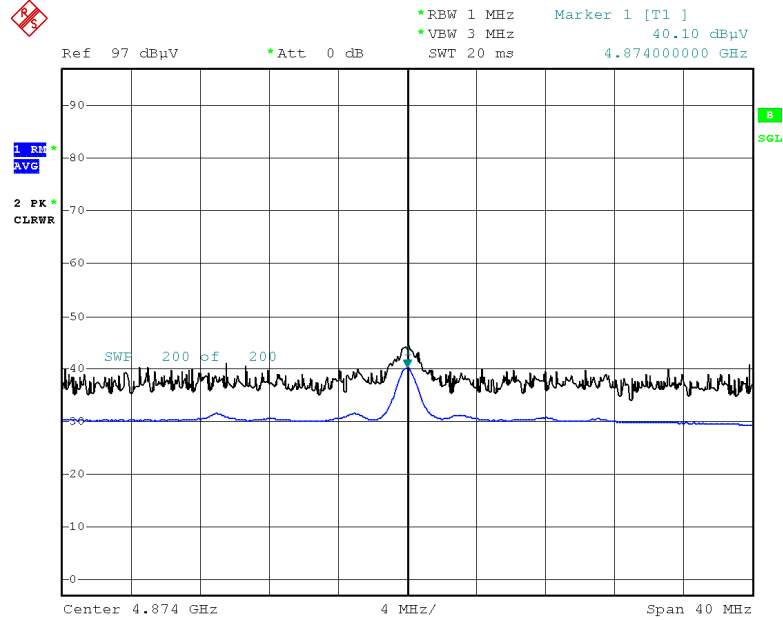

Date: 9.JUN.2021 19:53:20

### Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.6 2nd Harmonic)

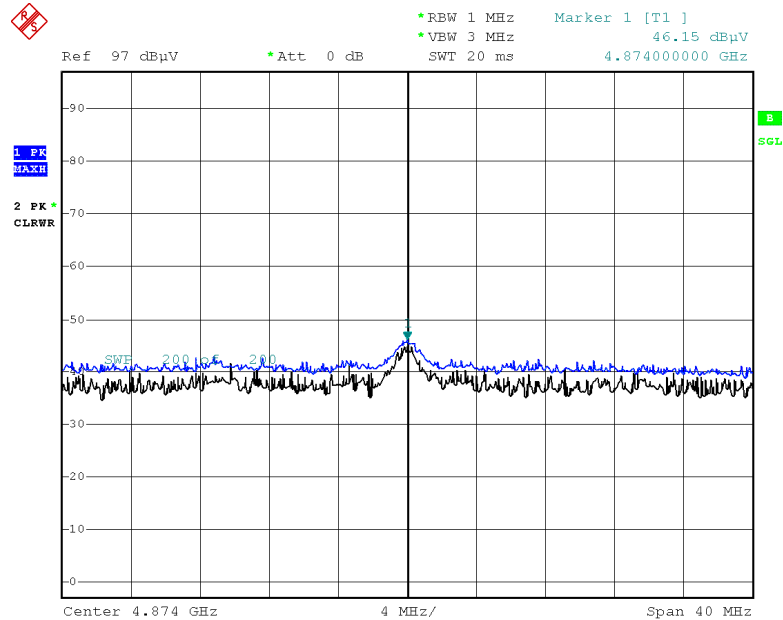

Date: 9.JUN.2021 19:53:31

## Note:

Plot of worst case are only reported.

## 9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
2390.0	49.42	10.94	H	60.36	73.98	13.62	PK
2390.0	39.08	10.94	H	50.02	53.98	3.96	AV
2390.0	49.94	10.94	V	60.88	73.98	13.10	PK
2390.0	40.01	10.94	V	50.95	53.98	3.03	AV
2483.5	48.89	11.20	H	60.09	73.98	13.89	PK
2483.5	38.74	11.20	H	49.94	53.98	4.04	AV
2483.5	49.39	11.20	V	60.59	73.98	13.39	PK
2483.5	39.52	11.20	V	50.72	53.98	3.26	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
12 ch / 2483.5	49.07	11.20	H	60.27	73.98	13.71	PK
12 ch / 2483.5	38.12	11.20	H	49.32	53.98	4.66	AV
12 ch / 2483.5	49.72	11.20	V	60.92	73.98	13.06	PK
12 ch / 2483.5	38.80	11.20	V	50.00	53.98	3.98	AV
13 ch / 2483.5	47.69	11.20	H	58.89	73.98	15.09	PK
13 ch / 2483.5	38.11	11.20	H	49.31	53.98	4.67	AV
13 ch / 2483.5	48.83	11.20	V	60.03	73.98	13.95	PK
13 ch / 2483.5	39.06	11.20	V	50.26	53.98	3.72	AV

Operation Mode: 802.11g  
Transfer Rate: 6 Mbps  
Operating Frequency: 2412 MHz, 2462 MHz  
Channel No.: 01 Ch, 11 Ch

Frequency	Reading	Duty Cycle	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	56.07	0.00	10.94	H	67.01	73.98	6.97	PK
2390.0	38.55	0.00	10.94	H	49.49	53.98	4.49	AV
2390.0	56.99	0.00	10.94	V	67.93	73.98	6.05	PK
2390.0	39.32	0.00	10.94	V	50.26	53.98	3.72	AV
2483.5	50.72	0.00	11.20	H	61.92	73.98	12.06	PK
2483.5	38.45	0.00	11.20	H	49.65	53.98	4.33	AV
2483.5	51.62	0.00	11.20	V	62.82	73.98	11.16	PK
2483.5	39.54	0.00	11.20	V	50.74	53.98	3.24	AV

Operation Mode: 802.11g  
Transfer Rate: 6 Mbps  
Operating Frequency: 2467 MHz, 2472 MHz  
Channel No.: 12 Ch, 13 Ch

Frequency	Reading	Duty Cycle	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
12 ch / 2483.5	50.64	0.00	11.20	H	61.84	73.98	12.14	PK
12 ch / 2483.5	38.67	0.00	11.20	H	49.87	53.98	4.11	AV
12 ch / 2483.5	51.93	0.00	11.20	V	63.13	73.98	10.85	PK
12 ch / 2483.5	39.09	0.00	11.20	V	50.29	53.98	3.69	AV
13 ch / 2483.5	50.72	0.00	11.20	H	61.92	73.98	12.06	PK
13 ch / 2483.5	38.69	0.00	11.20	H	49.89	53.98	4.09	AV
13 ch / 2483.5	51.66	0.00	11.20	V	62.86	73.98	11.12	PK
13 ch / 2483.5	39.68	0.00	11.20	V	50.88	53.98	3.10	AV

Operation Mode: 802.11n (HT20)  
Transfer Rate: MCS0  
Operating Frequency: 2412 MHz, 2462 MHz  
Channel No.: 01 Ch, 11 Ch

Frequency	Reading	Duty Cycle	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	52.75	0.00	10.94	H	63.69	73.98	10.29	PK
2390.0	38.90	0.00	10.94	H	49.84	53.98	4.14	AV
2390.0	53.32	0.00	10.94	V	64.26	73.98	9.72	PK
2390.0	39.88	0.00	10.94	V	50.82	53.98	3.16	AV
2483.5	51.69	0.00	11.20	H	62.89	73.98	11.09	PK
2483.5	38.45	0.00	11.20	H	49.65	53.98	4.33	AV
2483.5	52.56	0.00	11.20	V	63.76	73.98	10.22	PK
2483.5	39.32	0.00	11.20	V	50.52	53.98	3.46	AV

Operation Mode: 802.11n (HT20)  
Transfer Rate: MCS 0  
Operating Frequency: 2467 MHz, 2472 MHz  
Channel No.: 12 Ch, 13 Ch


Frequency	Reading	Duty Cycle	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
12 ch / 2483.5	53.24	0.00	11.20	H	64.44	73.98	9.54	PK
12 ch / 2483.5	38.49	0.00	11.20	H	49.69	53.98	4.29	AV
12 ch / 2483.5	54.09	0.00	11.20	V	65.29	73.98	8.69	PK
12 ch / 2483.5	39.22	0.00	11.20	V	50.42	53.98	3.56	AV
13 ch / 2483.5	50.09	0.00	11.20	H	61.29	73.98	12.69	PK
13 ch / 2483.5	38.99	0.00	11.20	H	50.19	53.98	3.79	AV
13 ch / 2483.5	50.48	0.00	11.20	V	61.68	73.98	12.30	PK
13 ch / 2483.5	39.59	0.00	11.20	V	50.79	53.98	3.19	AV

Operation Mode:	802.11n (HT40)
Transfer Rate:	MCS 0
Operating Frequency	2422 MHz, 2452 MHz
Channel No.	03 Ch, 09 Ch

Frequency	Reading	Duty Cycle	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	52.17	0.00	10.94	H	63.11	73.98	10.87	PK
2390.0	38.82	0.00	10.94	H	49.76	53.98	4.22	AV
2390.0	53.09	0.00	10.94	V	64.03	73.98	9.95	PK
2390.0	39.65	0.00	10.94	V	50.59	53.98	3.39	AV
2483.5	39.48	0.00	11.20	H	50.68	73.98	23.30	PK
2483.5	38.55	0.00	11.20	H	49.75	53.98	4.23	AV
2483.5	40.14	0.00	11.20	V	51.34	73.98	22.64	PK
2483.5	39.46	0.00	11.20	V	50.66	53.98	3.32	AV


## Test Plots

### Radiated Restricted Band Edges plot – Average Reading (802.11b Ch.1)

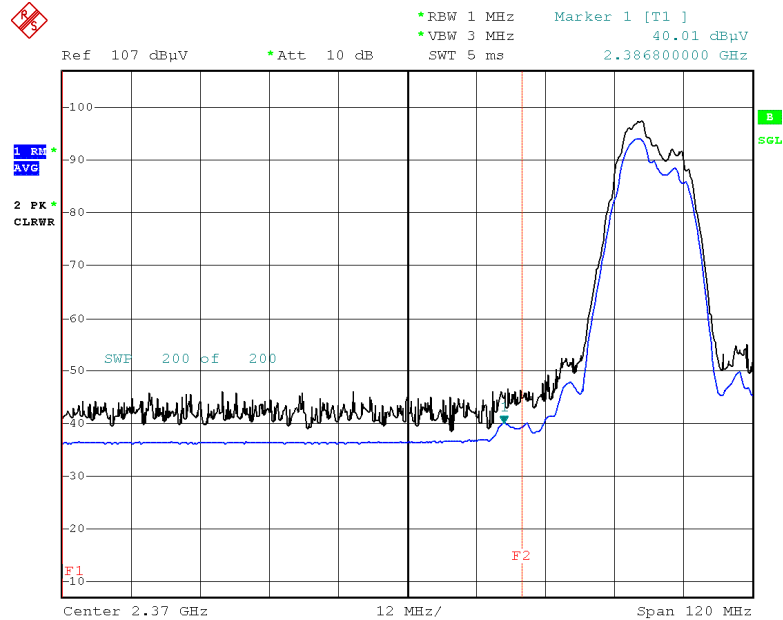

Date: 9.JUN.2021 14:43:44

### Radiated Restricted Band Edges plot – Peak Reading (802.11b Ch.1)

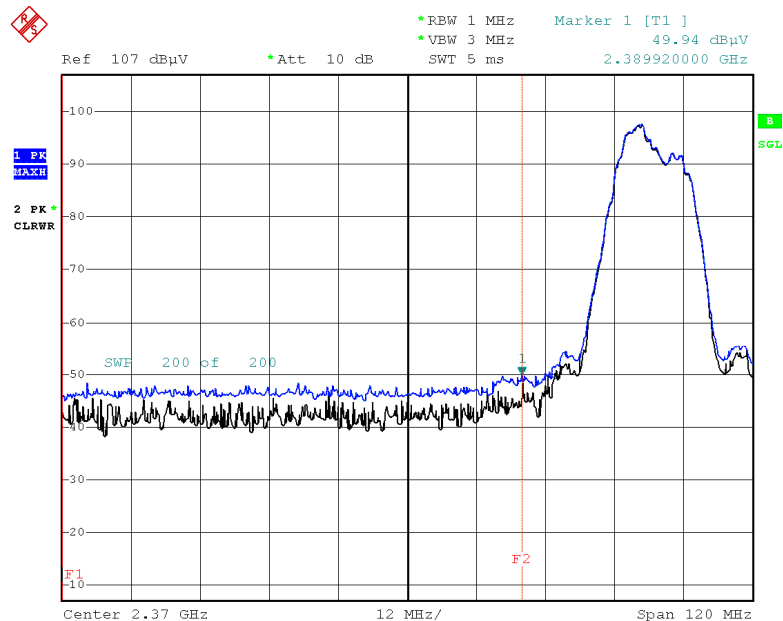

Date: 9.JUN.2021 14:43:59

## Note:

Plot of worst case are only reported.

## 9.8 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

#### Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

## 9.9 POWERLINE CONDUCTED EMISSIONS

## Conducted Emissions (Line 1)

Test


1 / 2

## Test Report

## Common Information

EUT : LGSBWAC22  
Manufacturer : LG  
Test Site: SHIELD ROOM  
Operating Conditions : 2.4G\_L1  
Operator Name:  
Comment:

Full Spectrum

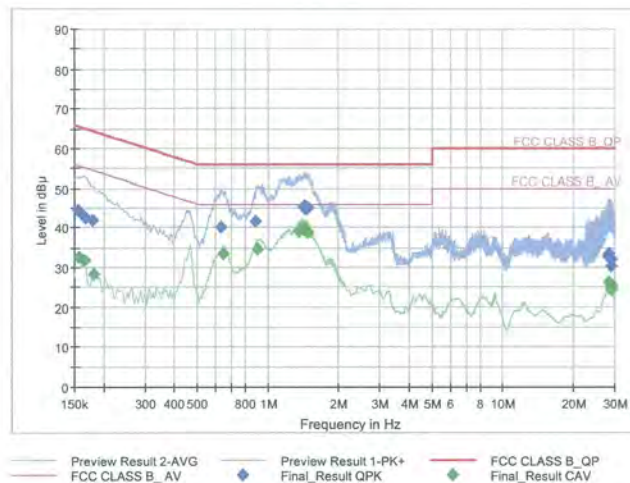

## Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBuV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1545	44.36	65.75	21.40	9.000	L1	OFF	9.6
0.1635	42.84	65.28	22.44	9.000	L1	OFF	9.6
0.1680	42.42	65.06	22.64	9.000	L1	OFF	9.6
0.1793	41.84	64.52	22.68	9.000	L1	OFF	9.6
0.6350	40.09	56.00	15.91	9.000	L1	OFF	9.6
0.8893	41.41	56.00	14.59	9.000	L1	OFF	9.6
1.4225	45.37	56.00	10.63	9.000	L1	OFF	9.6
1.4338	45.50	56.00	10.50	9.000	L1	OFF	9.6
1.4495	44.71	56.00	11.29	9.000	L1	OFF	9.6
1.4585	45.26	56.00	10.74	9.000	L1	OFF	9.6
1.4675	44.89	56.00	11.11	9.000	L1	OFF	9.6
1.4833	44.92	56.00	11.08	9.000	L1	OFF	9.6
28.1818	32.95	60.00	27.05	9.000	L1	OFF	10.0
28.3685	33.32	60.00	26.68	9.000	L1	OFF	10.0
28.6768	32.45	60.00	27.55	9.000	L1	OFF	10.0
28.8005	32.40	60.00	27.60	9.000	L1	OFF	10.0
28.8613	32.05	60.00	27.95	9.000	L1	OFF	10.0
29.0480	30.37	60.00	29.63	9.000	L1	OFF	10.0

2021-05-13

오후 10:57:03



Test

2 / 2

### Final Result\_CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1568	32.60	55.63	23.03	9.000	L1	OFF	9.6
0.1658	31.79	55.17	23.38	9.000	L1	OFF	9.6
0.1815	28.40	54.42	26.02	9.000	L1	OFF	9.6
0.6440	33.47	46.00	12.53	9.000	L1	OFF	9.6
0.9028	34.60	46.00	11.40	9.000	L1	OFF	9.6
1.3618	39.05	46.00	6.95	9.000	L1	OFF	9.6
1.3978	39.51	46.00	6.49	9.000	L1	OFF	9.6
1.4225	39.66	46.00	6.34	9.000	L1	OFF	9.6
1.4338	39.47	46.00	6.53	9.000	L1	OFF	9.6
1.4585	39.34	46.00	6.66	9.000	L1	OFF	9.6
1.4698	38.92	46.00	7.08	9.000	L1	OFF	9.6
1.4923	38.55	46.00	7.45	9.000	L1	OFF	9.6
28.4293	26.24	50.00	23.76	9.000	L1	OFF	10.0
28.6745	25.87	50.00	24.13	9.000	L1	OFF	10.0
28.8028	25.66	50.00	24.34	9.000	L1	OFF	10.0
28.8613	25.52	50.00	24.48	9.000	L1	OFF	10.0
28.9265	24.67	50.00	25.33	9.000	L1	OFF	10.0
29.0435	24.12	50.00	25.88	9.000	L1	OFF	10.0

2021-05-13

오후 10:57:03

Conducted Emissions (Line 2)

Test


1 / 2

## Test Report

## Common Information

EUT : LGSBWAC22  
Manufacturer : LG  
Test Site: SHIELD ROOM  
Operating Conditions : 2.4G\_N  
Operator Name:  
Comment:

Full Spectrum

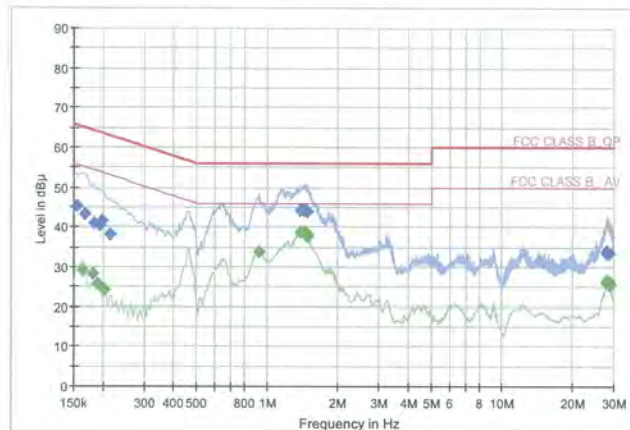

Preview Result 2-AVG      Preview Result 1-PK+      FCC CLASS B\_QP  
FCC CLASS B\_AV      Final\_Result QPK      Final\_Result CAV

## Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBμV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1545	45.19	65.75	20.57	9.000	N	OFF	9.6
0.1680	43.24	65.06	21.82	9.000	N	OFF	9.6
0.1838	41.06	64.31	23.26	9.000	N	OFF	9.6
0.1950	40.25	63.82	23.57	9.000	N	OFF	9.6
0.1995	41.46	63.63	22.17	9.000	N	OFF	9.6
0.2153	38.02	63.00	24.98	9.000	N	OFF	9.6
1.3888	44.26	56.00	11.74	9.000	N	OFF	9.6
1.4338	44.50	56.00	11.50	9.000	N	OFF	9.6
1.4428	44.27	56.00	11.73	9.000	N	OFF	9.6
1.4585	44.50	56.00	11.50	9.000	N	OFF	9.6
1.4675	44.15	56.00	11.85	9.000	N	OFF	9.6
1.4945	43.92	56.00	12.08	9.000	N	OFF	9.6
28.0648	33.52	60.00	26.48	9.000	N	OFF	10.0
28.0985	34.05	60.00	25.95	9.000	N	OFF	10.0
28.1165	33.37	60.00	26.63	9.000	N	OFF	10.0
28.3550	33.80	60.00	26.20	9.000	N	OFF	10.1
28.4113	33.66	60.00	26.34	9.000	N	OFF	10.1
28.5778	33.45	60.00	26.55	9.000	N	OFF	10.1

2021-05-13

오후 10:50:18

Test

2 / 2

### Final Result CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1635	29.25	55.28	26.04	9.000	N	OFF	9.6
0.1815	28.13	54.42	26.28	9.000	N	OFF	9.6
0.1905	25.56	54.02	28.45	9.000	N	OFF	9.6
0.2040	24.27	53.45	29.17	9.000	N	OFF	9.6
0.9253	33.67	46.00	12.33	9.000	N	OFF	9.6
1.3978	38.70	46.00	7.30	9.000	N	OFF	9.6
1.4338	38.65	46.00	7.35	9.000	N	OFF	9.6
1.4450	38.62	46.00	7.38	9.000	N	OFF	9.6
1.4585	38.70	46.00	7.30	9.000	N	OFF	9.6
1.4698	38.14	46.00	7.86	9.000	N	OFF	9.6
1.4810	38.07	46.00	7.93	9.000	N	OFF	9.6
1.4945	37.46	46.00	8.54	9.000	N	OFF	9.6
27.9433	26.20	50.00	23.80	9.000	N	OFF	10.0
28.0985	26.07	50.00	23.93	9.000	N	OFF	10.0
28.1188	26.22	50.00	23.78	9.000	N	OFF	10.0
28.1750	26.52	50.00	23.48	9.000	N	OFF	10.0
28.6678	26.35	50.00	23.65	9.000	N	OFF	10.1
28.8568	25.34	50.00	24.66	9.000	N	OFF	10.1

2021-05-13

오후 10:50:18

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	09/16/2020	Annual	101910
ESPAC	SU-642 / Temperature Chamber	03/15/2021	Annual	0093008124
Agilent	N9020A / Signal Analyzer	04/16/2021	Annual	MY50210191
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Agilent	N1911A / Power Meter	04/08/2021	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/08/2021	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/09/2021	Annual	10545
Hewlett Packard	E3632A / DC Power Supply	06/10/2021	Annual	KR75303960
Weinschel	2-20 / Attenuator(20 dB)	10/07/2020	Annual	BR0592
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/04/2021	Annual	100422

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

### Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	03/19/2020	Biennial	1513-333
Schwarzbeck	VULB 9168 / Hybrid Antenna	09/04/2020	Biennial	9168-0895
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/14/2020	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/22/2020	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/08/2021	Annual	1
CERNEX	CBLU1183540B-01/Broadband Bench Top LNA	12/23/2020	Annual	N/A
WEINSCHTEL	56-10 / Attenuator(10 dB)			
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	12/23/2020	Annual	N/A
Api tech.	18B-03 / Attenuator (3 dB)			
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/23/2020	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2021	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/09/2021	Annual	3000C000276

#### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2106-FI014-P