

Test Plots ( $\pi/4$ DQPSK)  
Channel Separation



Test Plots (GFSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.0)




Test Plots (GFSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.39)




Test Plots (GFSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.78)




Test Plots (8DPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.0)

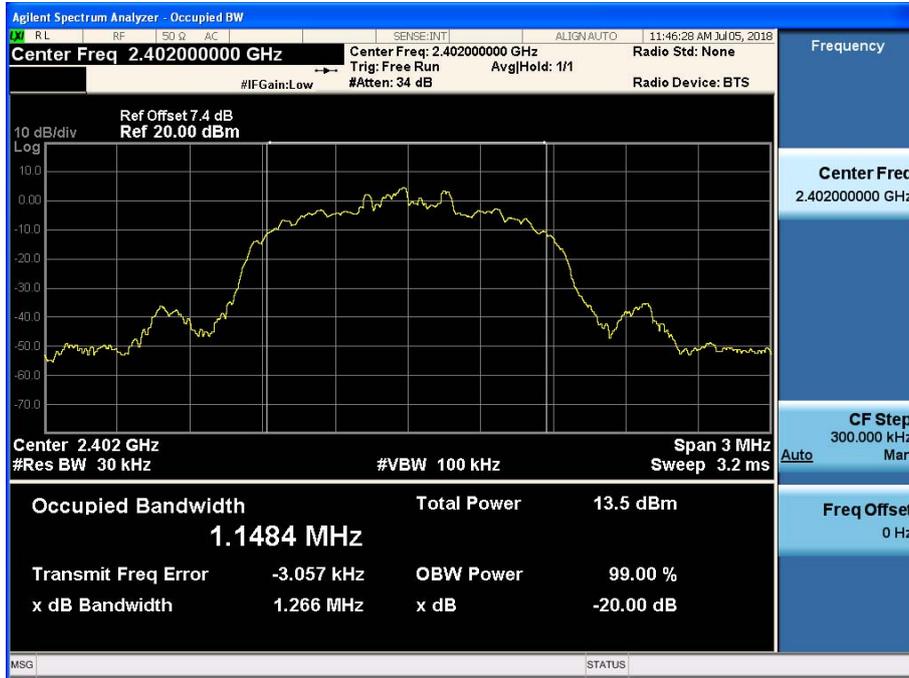


Test Plots (8DPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.39)

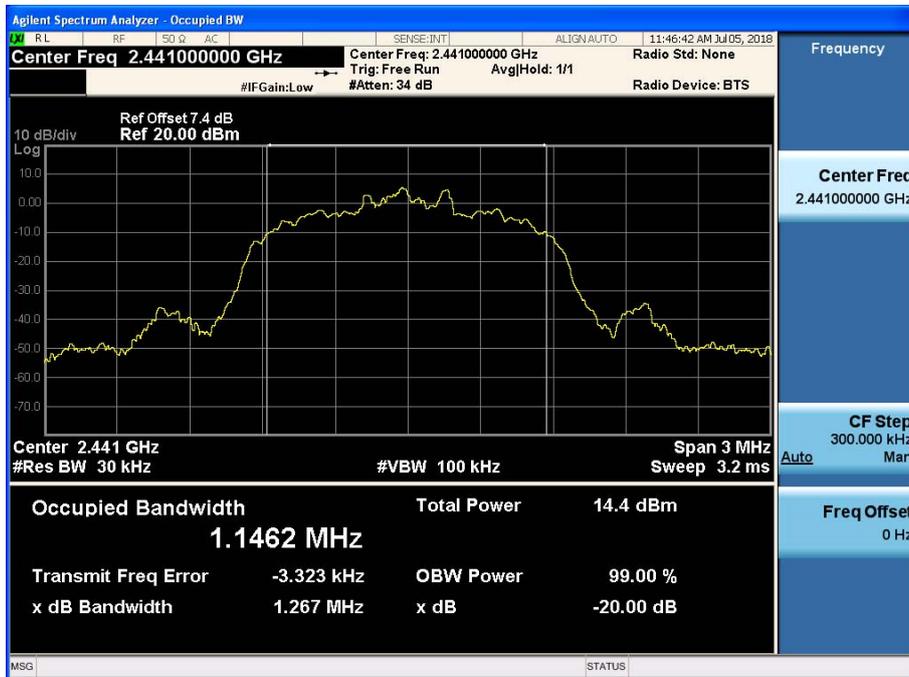

Test Plots (8DPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.78)

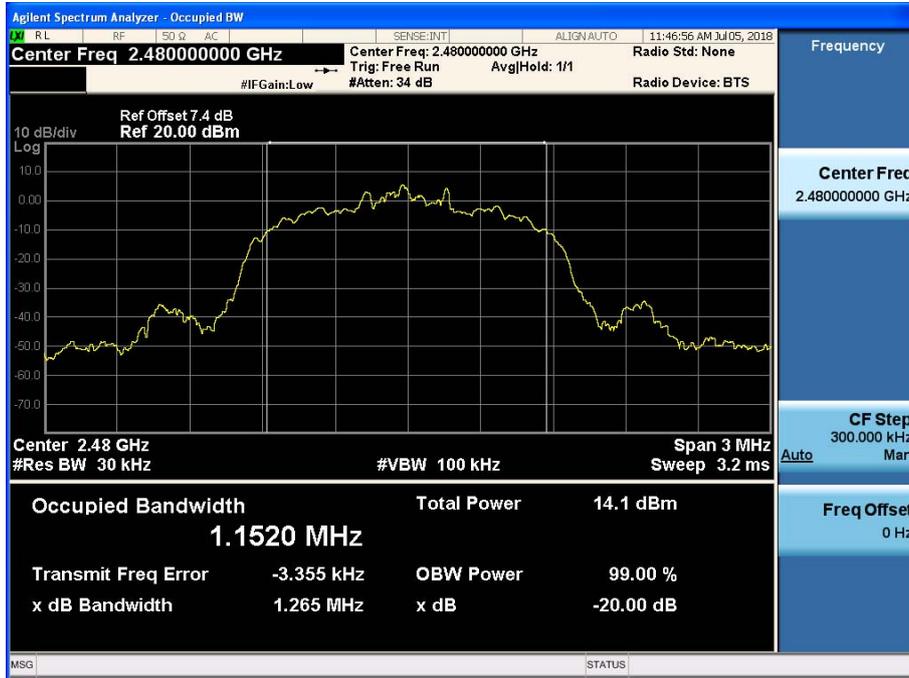


Test Plots ( $\pi/4$ DQPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.0)

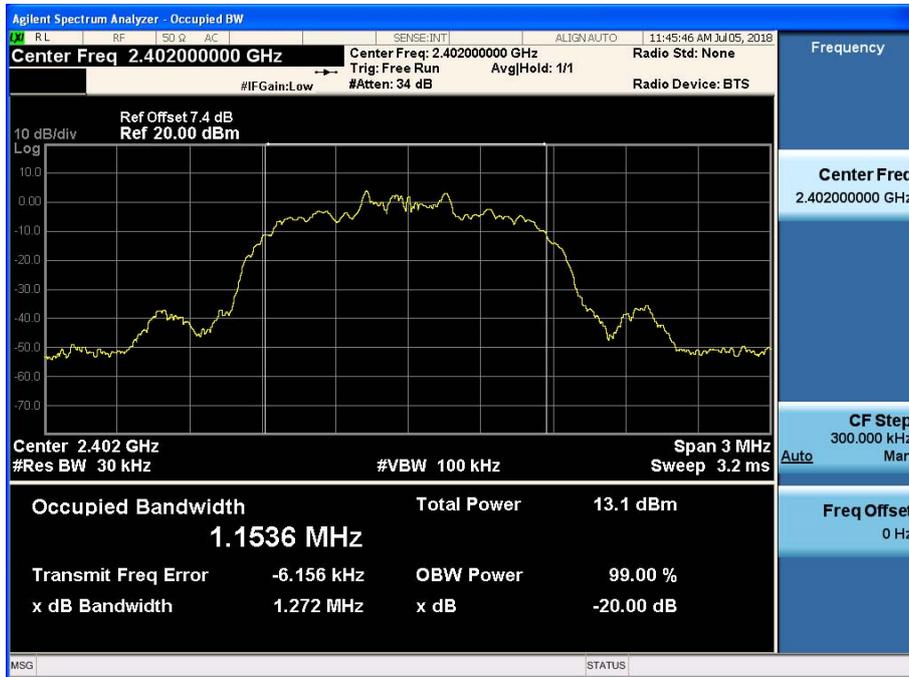

Test Plots ( $\pi/4$ DQPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.39)



Test Plots ( $\pi/4$ DQPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.78)

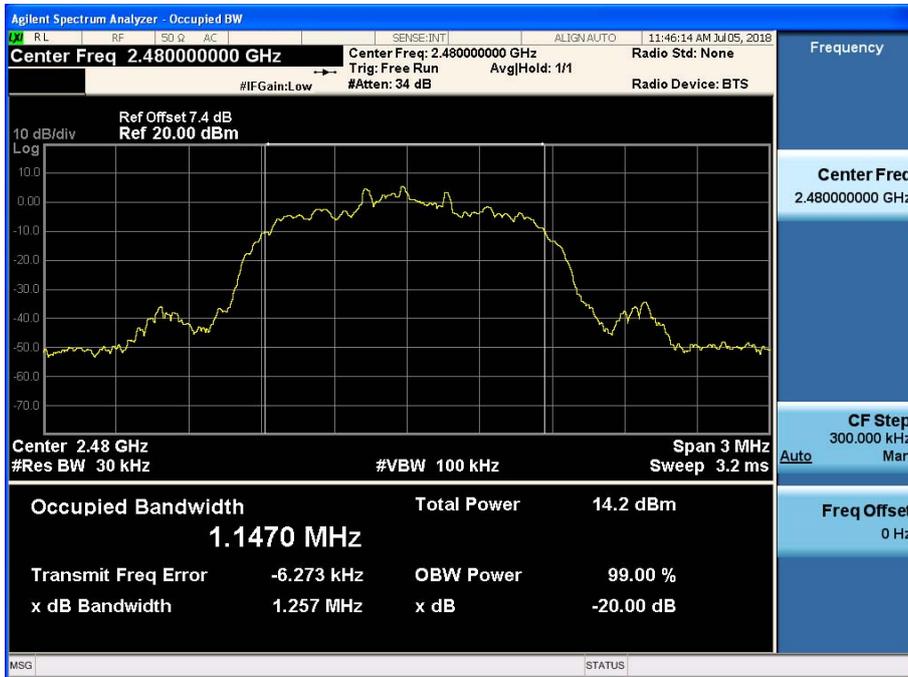


## 9.4 NUMBER OF HOPPING FREQUENCY

### LIMIT

According to §15.247(a)(1)(iii) / RSS-247 5.1.d., Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

### TEST CONFIGURATION

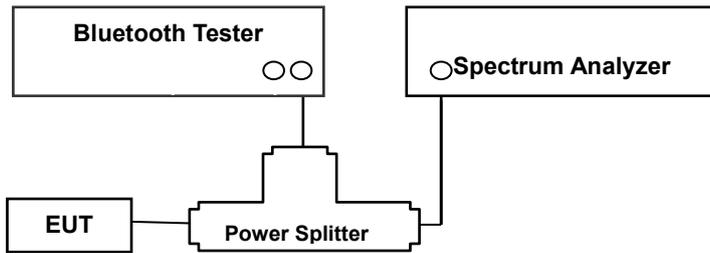

### TEST PROCEDURE

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013)

- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

### TEST RESULTS


No non-compliance noted

Result (No. of CH)			Limit	Result
GFSK	8DPSK	$\pi/4$ DQPSK		
79	79	79	>15	Pass

**Note :** In case of AFH mode, minimum number of hopping channels is 20.

Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)

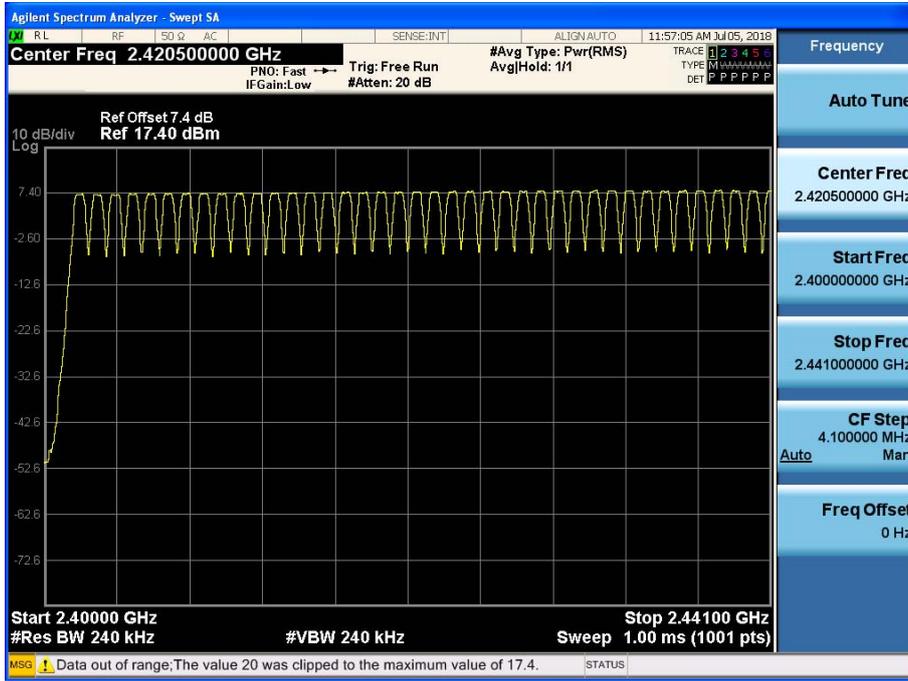


Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.4835 GHz)




Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

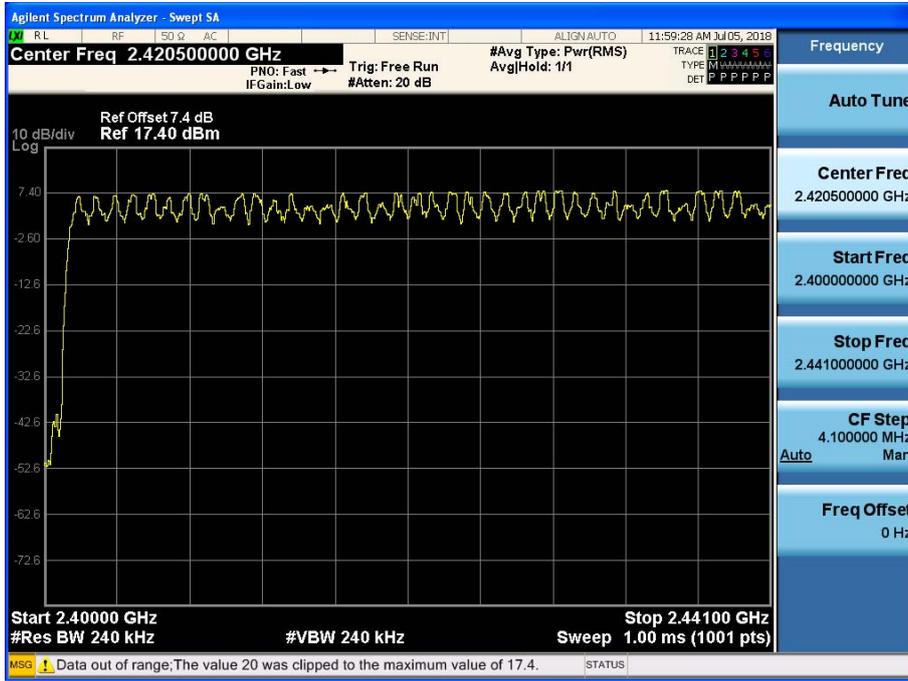


Test Plots (8DPSK)


Number of Channels (2.441 GHz - 2.4835 GHz)

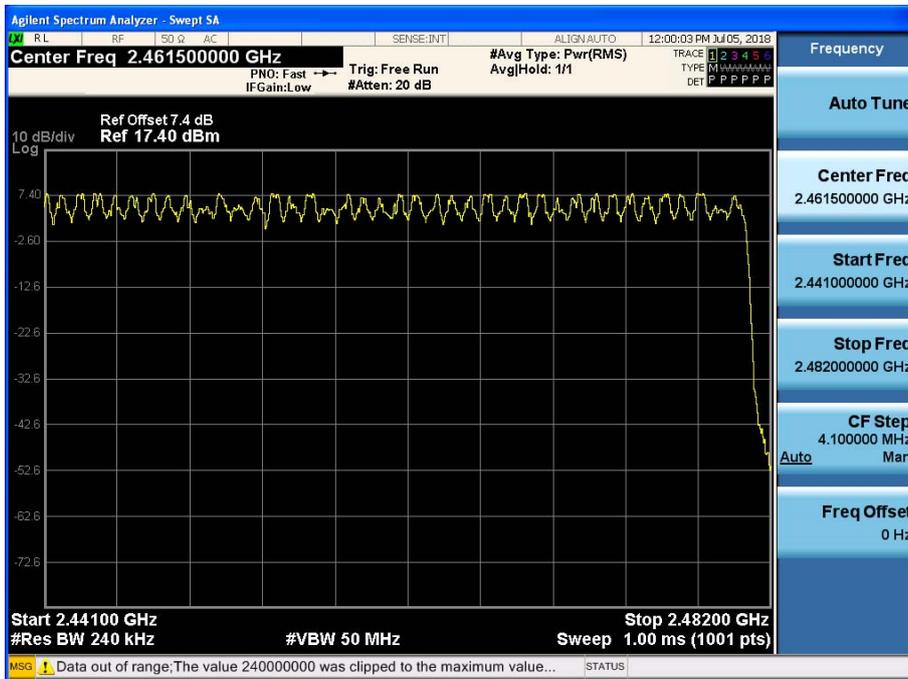

Test Plots ( $\pi/4$ DQPSK)  
Number of Channels (2.4 GHz - 2.441 GHz)

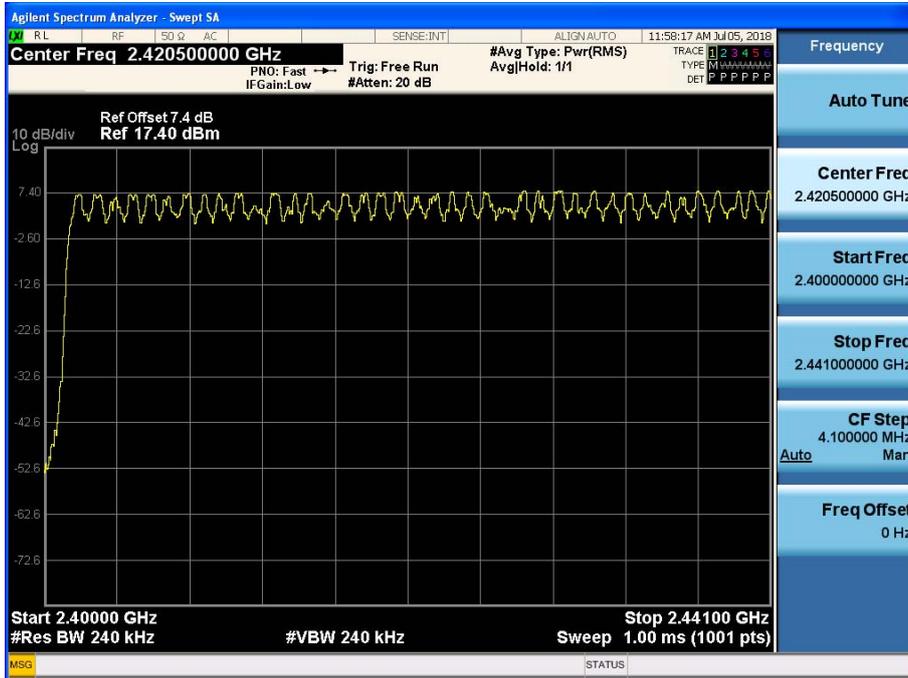

Test Plots ( $\pi/4$ DQPSK)  
Number of Channels (2.441 GHz - 2.4835 GHz)

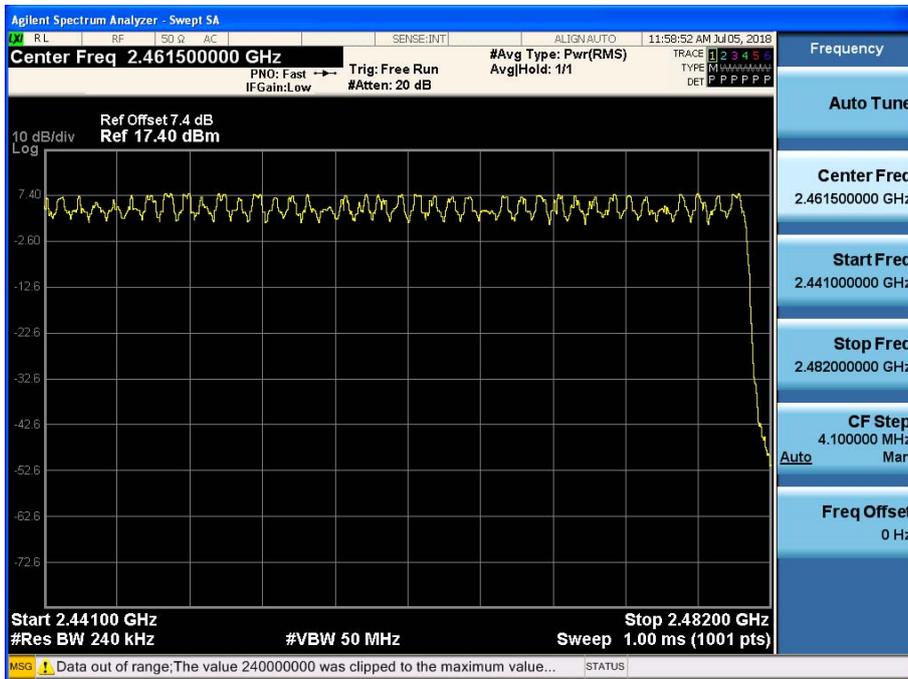


## 9.5 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(iii) / RSS-247 5.1.d., Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### TEST CONFIGURATION

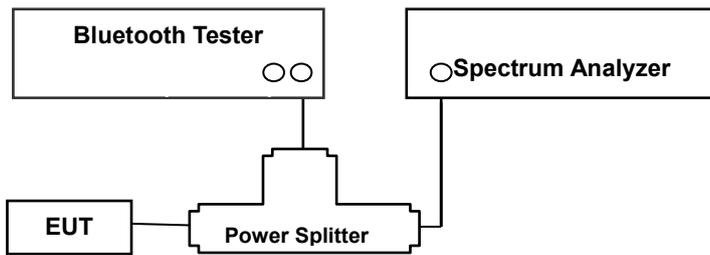

### TEST PROCEDURE

This test is performed with hopping off.

EUT was set to transmit the longest packet type (DH5)

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

### TEST CONFIGURATION

#### Normal Mode / EDR Mode

**DH 5**(The longest packet type for GFSK)

CH Mid :  $2.890 * (1600/6)/79 * 31.6 = 308.27$  (ms)

**2-DH 5**(The longest packet type for  $\pi/4$ DQPSK)

CH Mid :  $2.890 * (1600/6)/79 * 31.6 = 308.27$  (ms)

**3-DH 5**(The longest packet type for 8DPSK)

CH Mid :  $2.890 * (1600/6)/79 * 31.6 = 308.27$  (ms)

**AFH Mode**

**DH 5**(The longest packet type for GFSK)

CH Mid :  $2.890 * (800/6)/20 * 8.0 = 154.13 \text{ (ms)}$

**2-DH 5**(The longest packet type for  $\pi/4$ DQPSK)

CH Mid :  $2.890 * (800/6)/20 * 8.0 = 154.13 \text{ (ms)}$

**3-DH 5**(The longest packet type for 8DPSK)

CH Mid :  $2.890 * (800/6)/20 * 8.0 = 154.13 \text{ (ms)}$

Note :

A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.7 times of appearance.

Each tx-time per appearance of DH5 is 2.892 ms.

Dwell time = Tx-time \* 106.7


**TEST RESULTS**

See the table.


	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Low	2.880	2.885	2.885
	Mid	2.880	2.885	2.880
	High	2.880	2.885	2.880

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)	Result
Total of Dwell (ms)	Low	307.20	307.73	307.73	32	400	PASS
	Mid	307.20	307.73	307.20	32		PASS
	High	307.20	307.73	307.20	32		PASS


Test Plots (GFSK)  
Dwell Time (CH.0)

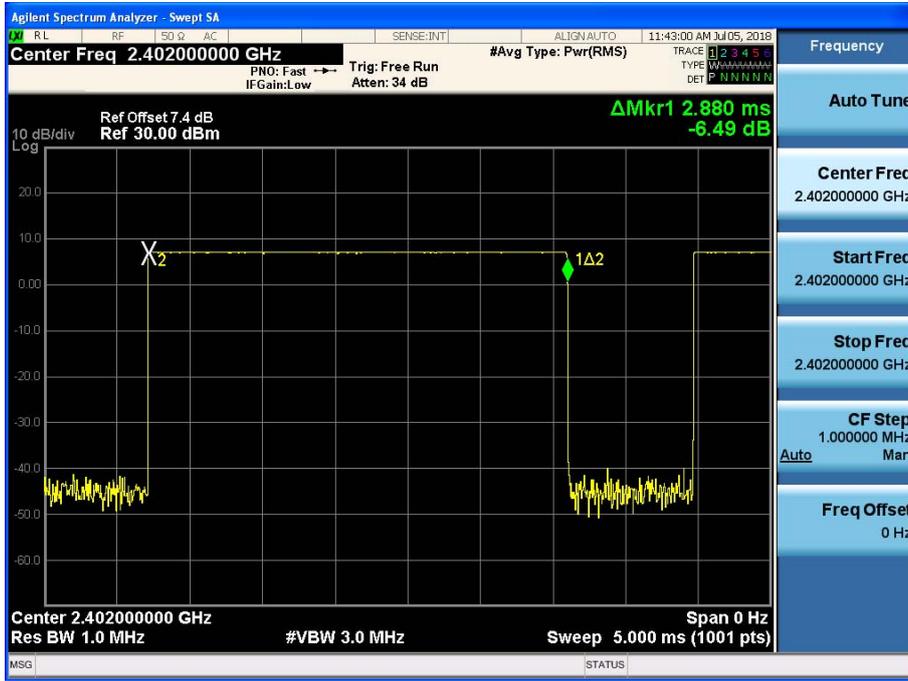


Test Plots (GFSK)  
Dwell Time (CH.39)

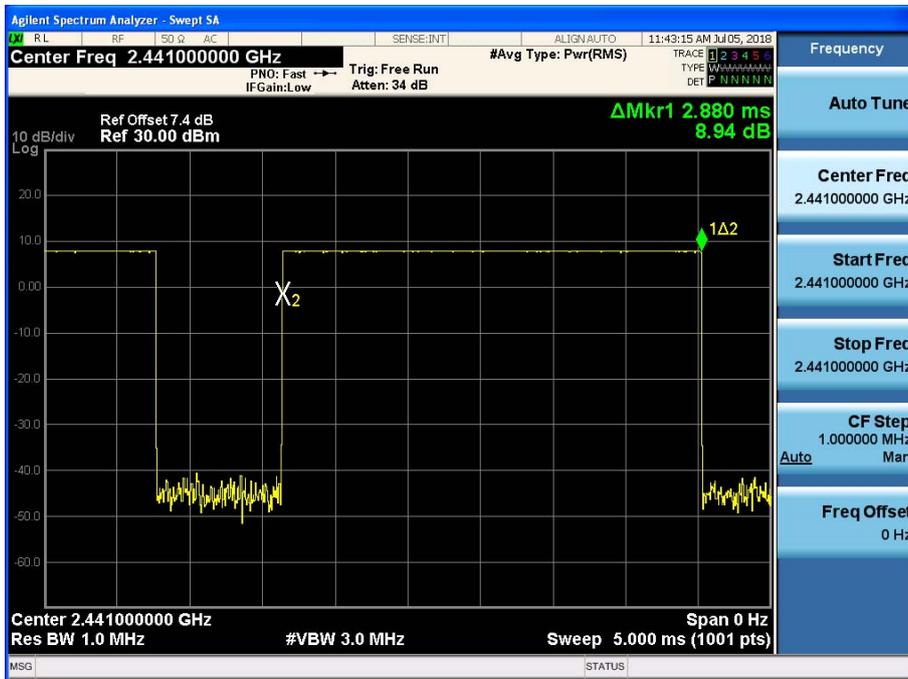

Test Plots (GFSK)  
Dwell Time (CH.78)

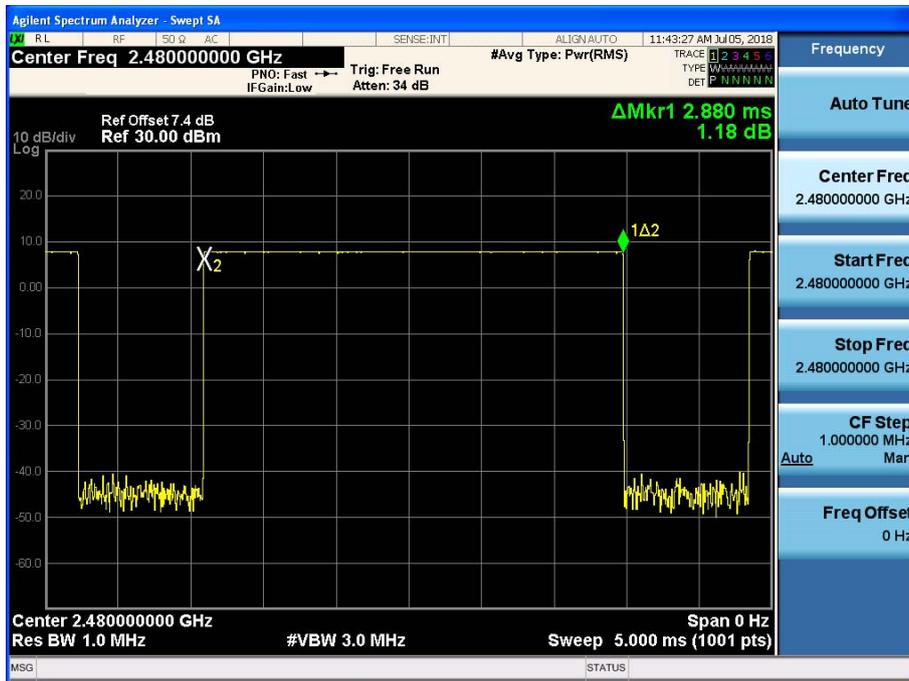


Test Plots (8DPSK)  
Dwell Time (CH.0)

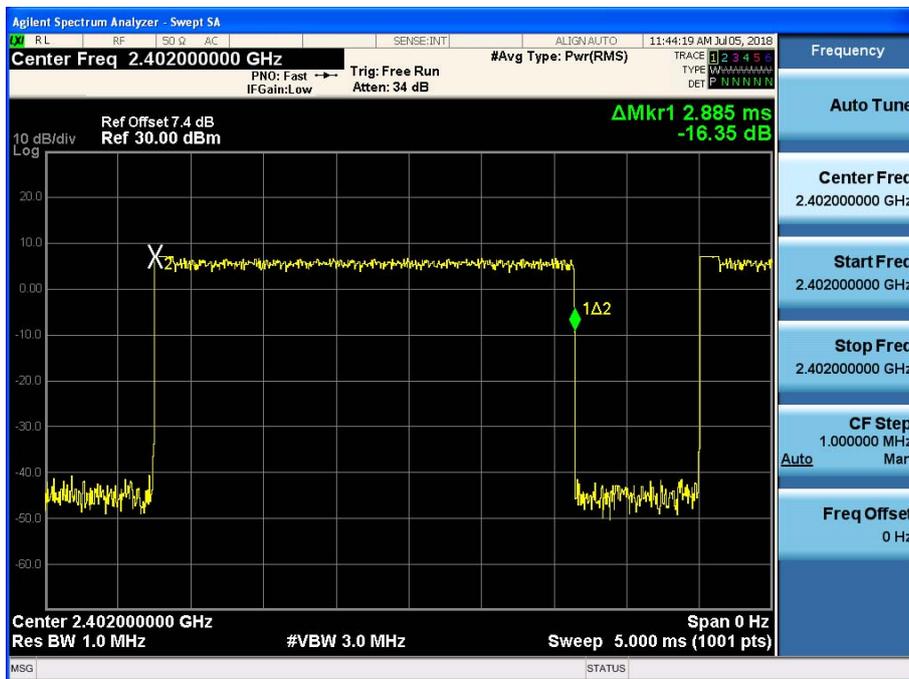


Test Plots (8DPSK)

Dwell Time (CH.39)

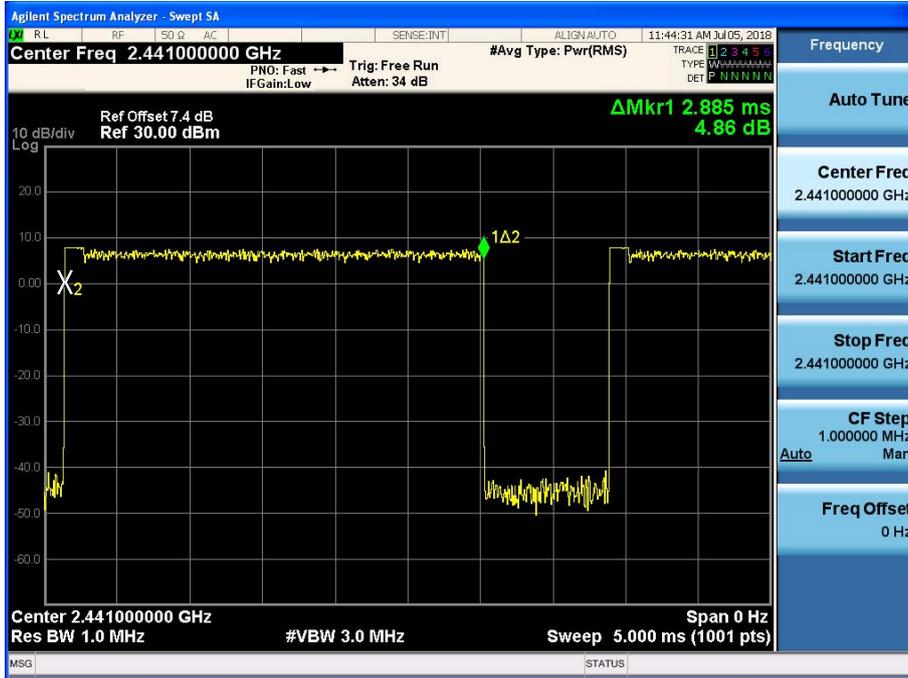


Test Plots (8DPSK)


Dwell Time (CH.78)

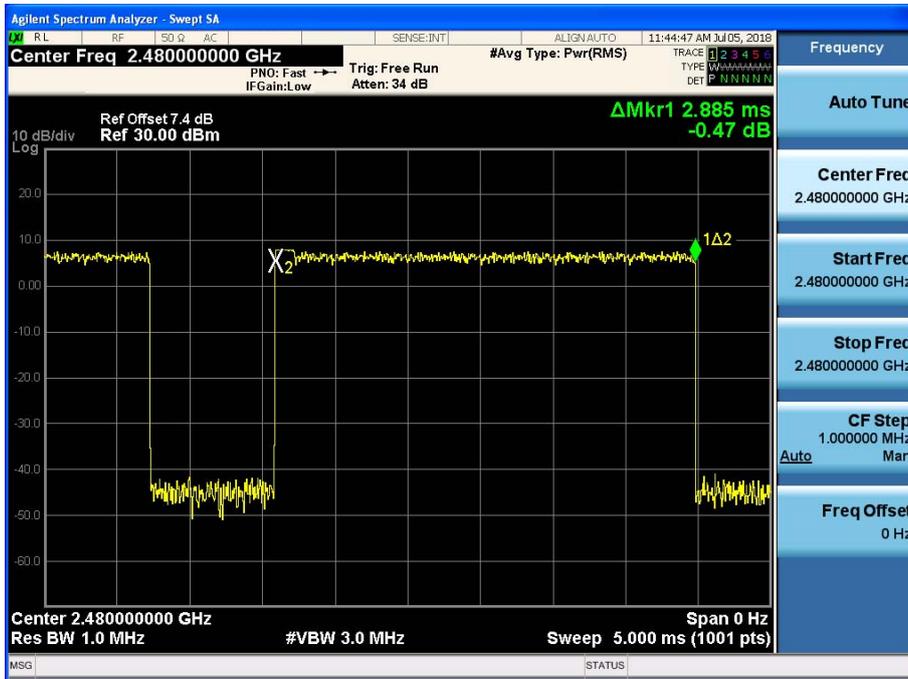


Test Plots ( $\pi/4$ DQPSK)  
Dwell Time (CH.0)

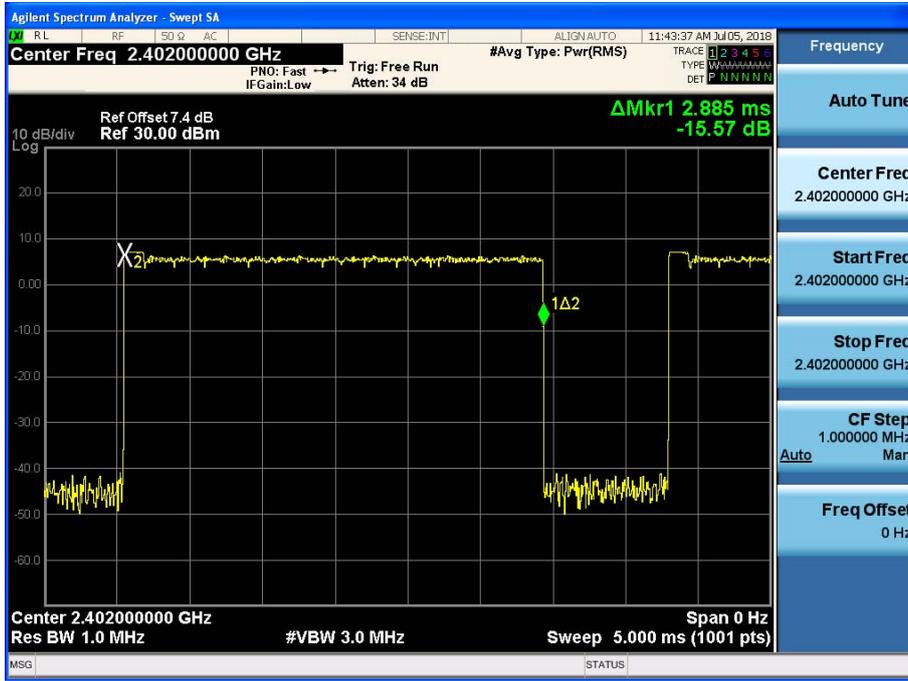

Test Plots ( $\pi/4$ DQPSK)  
Dwell Time (CH.39)

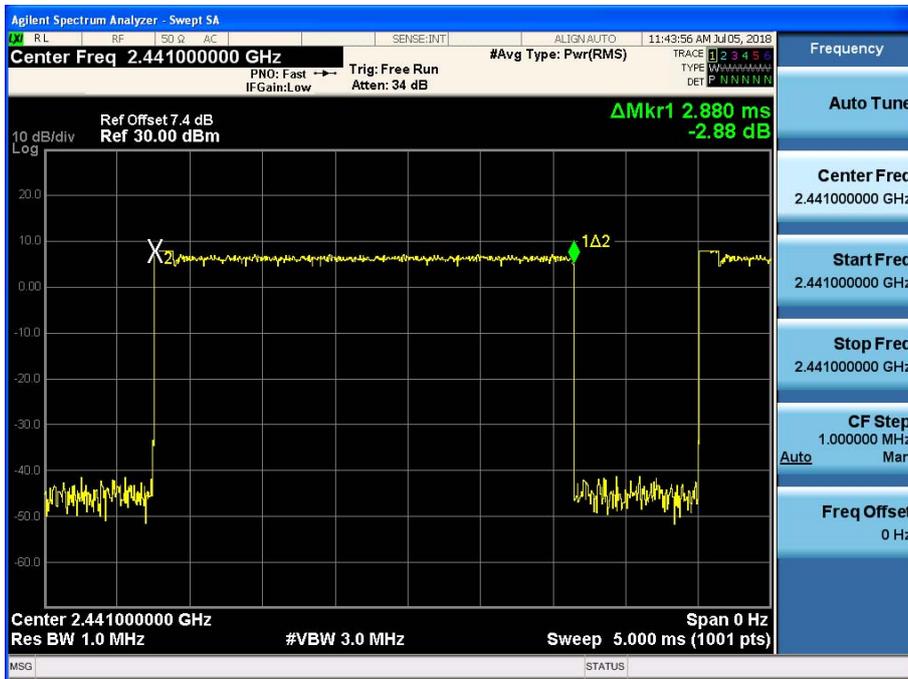

Test Plots ( $\pi/4$ DQPSK)  
Dwell Time (CH.78)

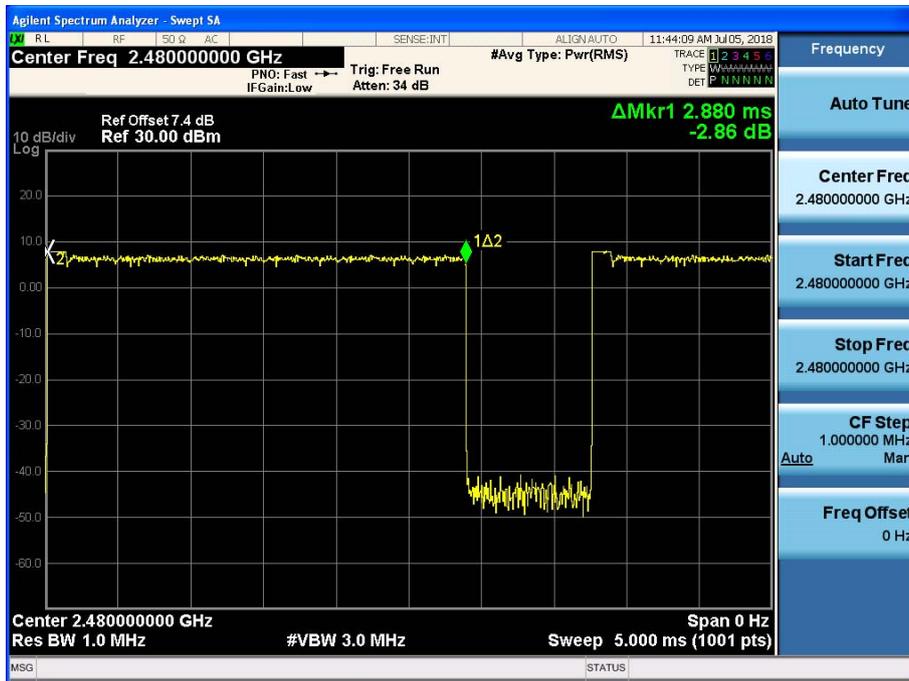

## 9.6 SPURIOUS EMISSIONS


### 9.6.1 CONDUCTED SPURIOUS EMISSIONS

#### Test Requirements and limit, §15.247(d) / RSS-247(Issue 2) Section 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) / RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit : 20 dBc**

#### TEST CONFIGURATION

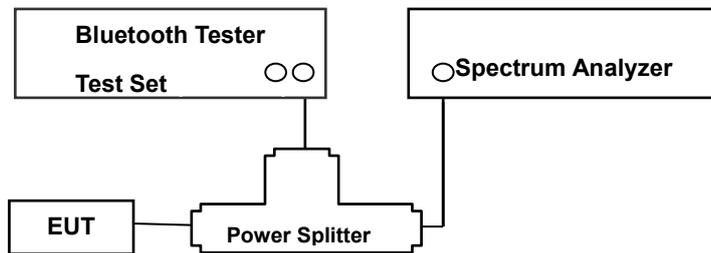

#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

### TEST RESULTS

No non-compliance noted.

Note : In order to simplify the report, attached plots were only the worst case channel and data rate.


### FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	7.18
100	6.35
200	7.04
300	6.58
400	6.26
500	5.95
600	6.17
700	6.34
800	6.72
900	7.08
1000	7.38
2000	7.78
2400*	7.40
2500*	7.44
3000	7.88
4000	8.95
5000	9.57
6000	6.68
7000	9.99
8000	8.34
9000	9.61
10000	10.47
11000	8.96
12000	9.73
13000	8.84
14000	9.50
15000	11.54
16000	8.14
17000	11.73
18000	9.71
19000	10.40
20000	11.69
21000	10.72
22000	12.31
23000	9.85
24000	12.52
25000	11.07
26000	10.50


Note : 1. \*\* is fundamental frequency range.

2. Factor = Cable loss + Splitter loss


Test Plots (8DPSK)- 30 MHz - 1 GHz  
Spurious Emission (CH.39)

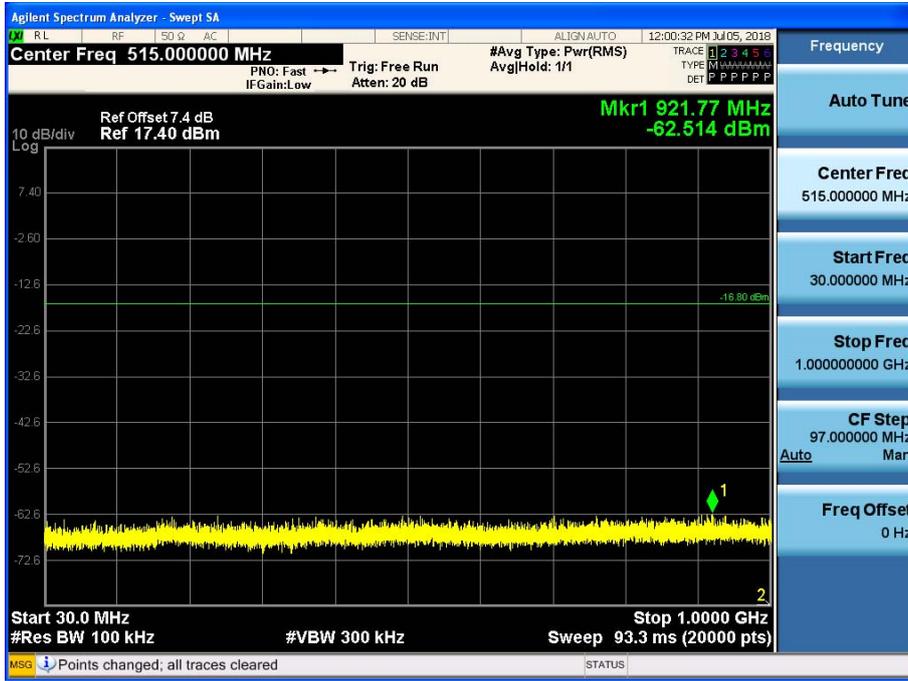


Test Plots (8DPSK)- 1 GHz – 3 GHz  
Spurious Emission (CH.39)

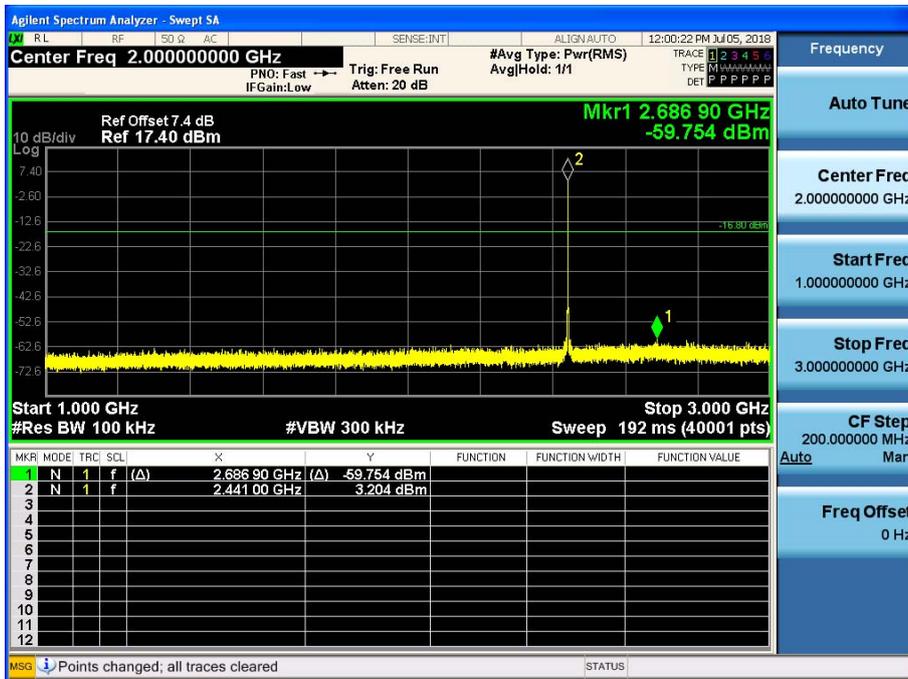


Test Plots (8DPSK)- 3 GHz - 5 GHz  
Spurious Emission (CH.39)

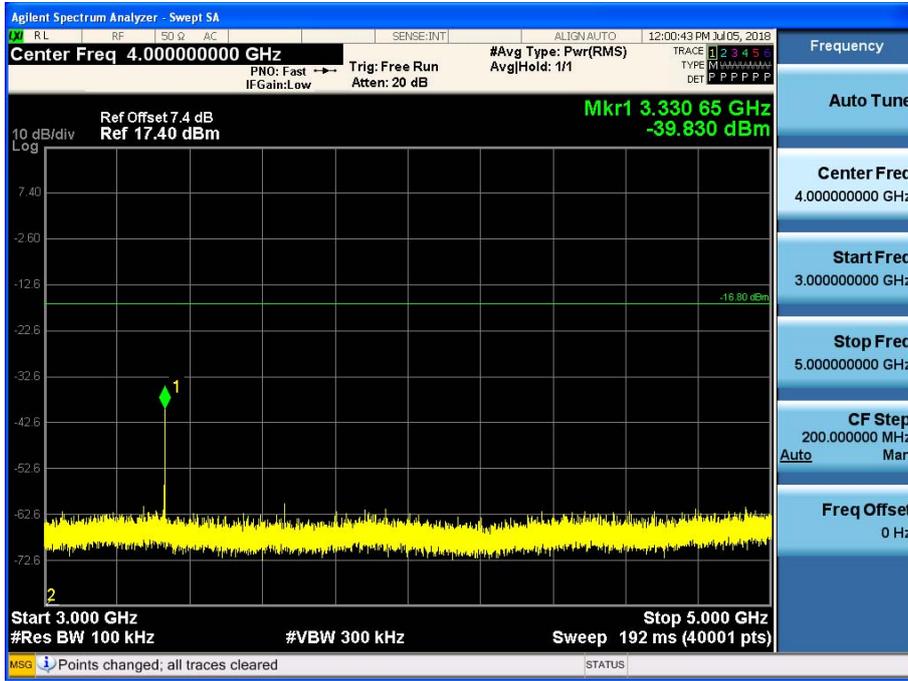


Test Plots (8DPSK)- 5 GHz - 7 GHz  
Spurious Emission (CH.39)

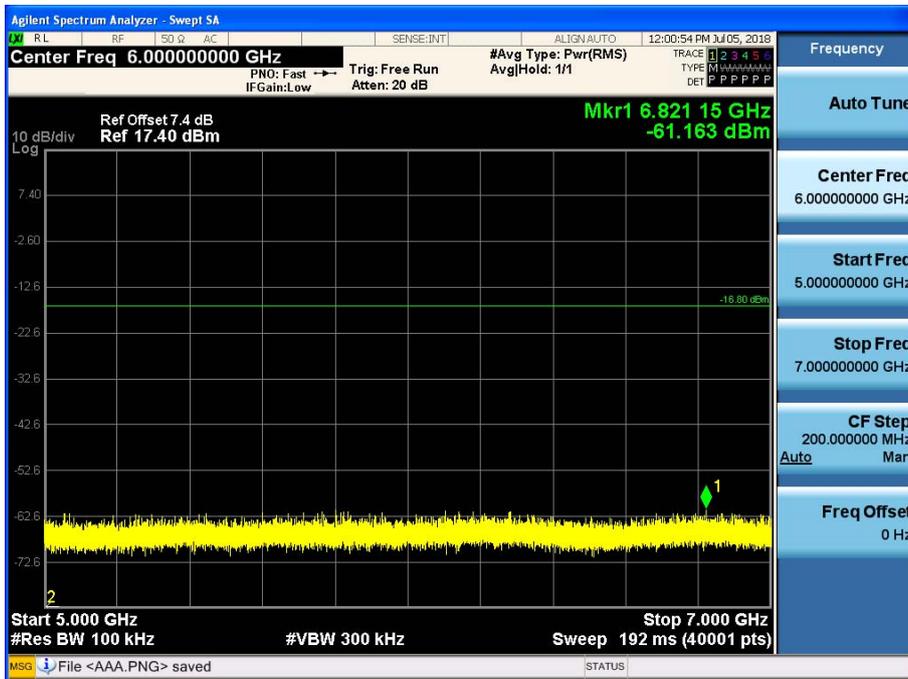


Test Plots (8DPSK)- 7 GHz - 9 GHz  
Spurious Emission (CH.39)

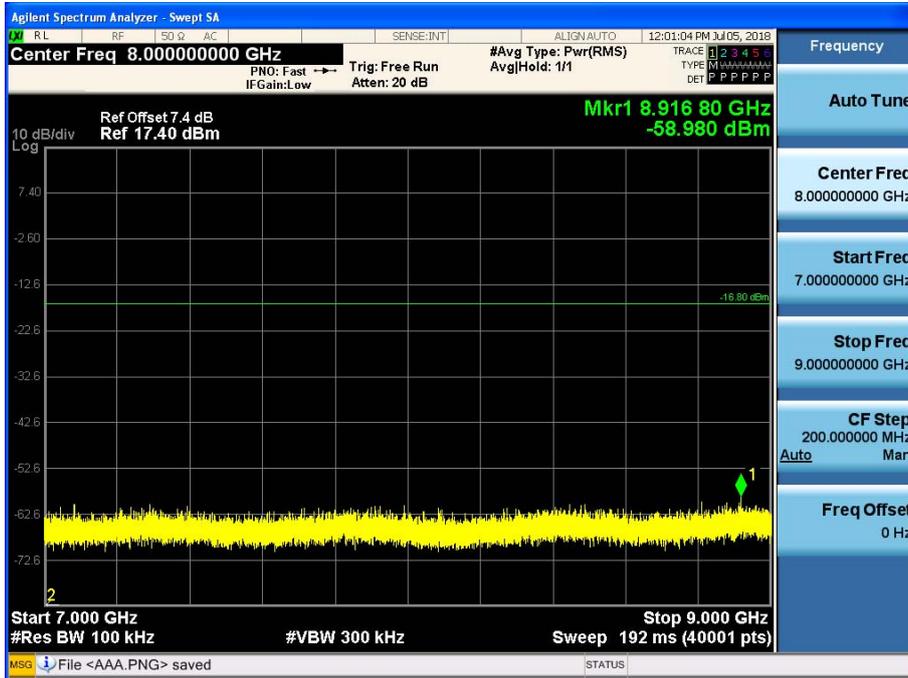


Test Plots (8DPSK)- 9 GHz - 11 GHz  
Spurious Emission (CH.39)

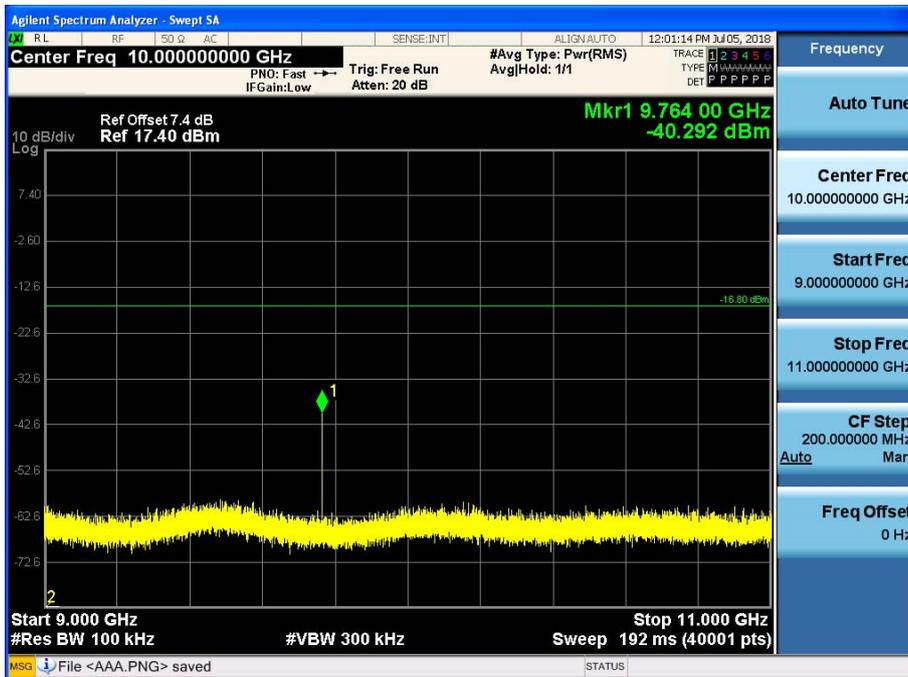


Test Plots (8DPSK)-11 GHz - 13 GHz  
Spurious Emission (CH.39)

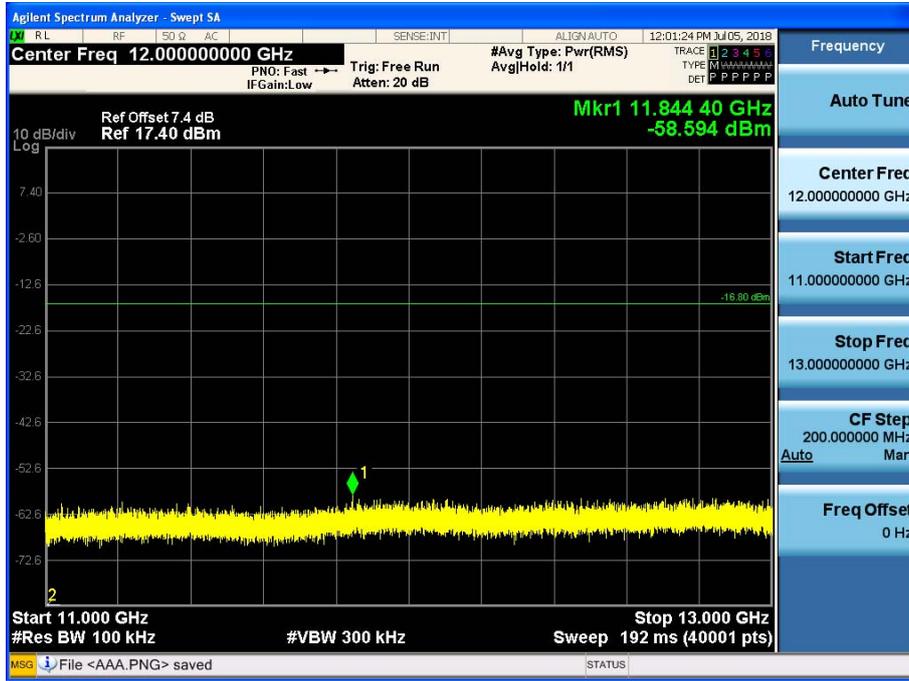


Test Plots (8DPSK)- 13 GHz – 15 GHz  
Spurious Emission (CH.39)

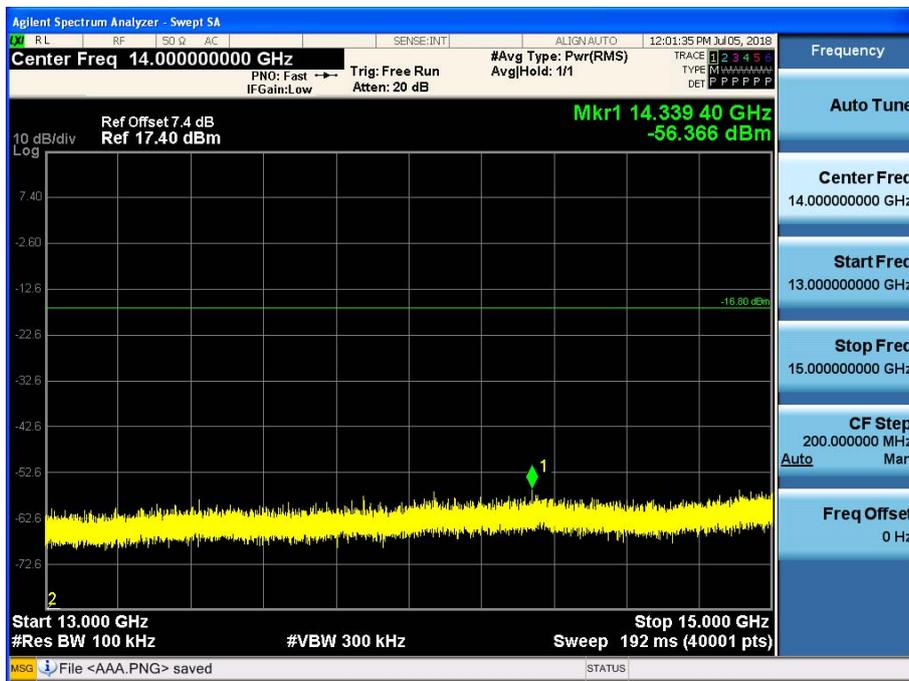


Test Plots (8DPSK)- 15 GHz - 17 GHz  
Spurious Emission (CH.39)

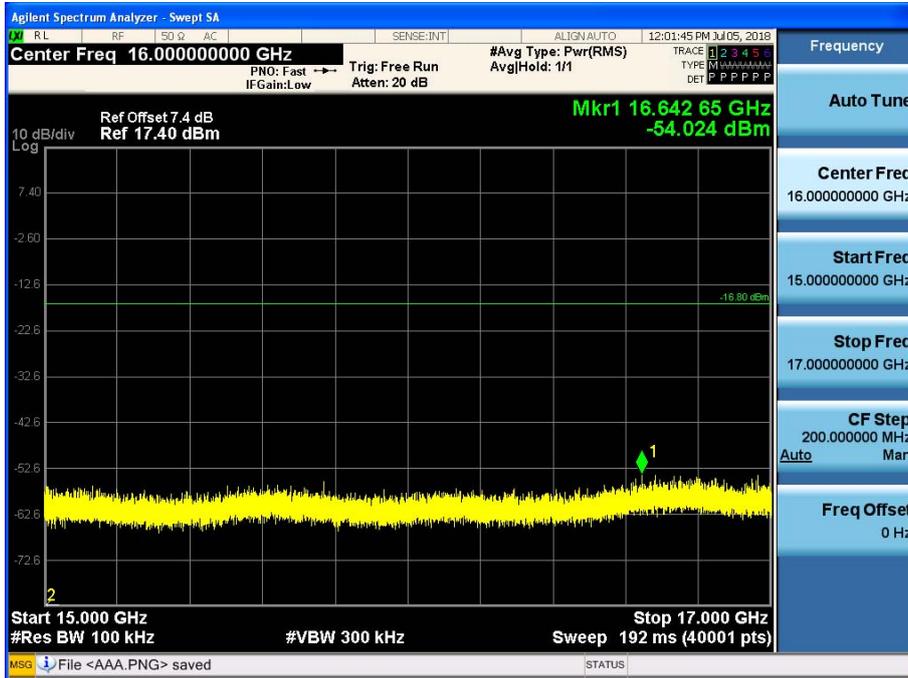


Test Plots (8DPSK)- 17 GHz - 19 GHz  
Spurious Emission (CH.39)

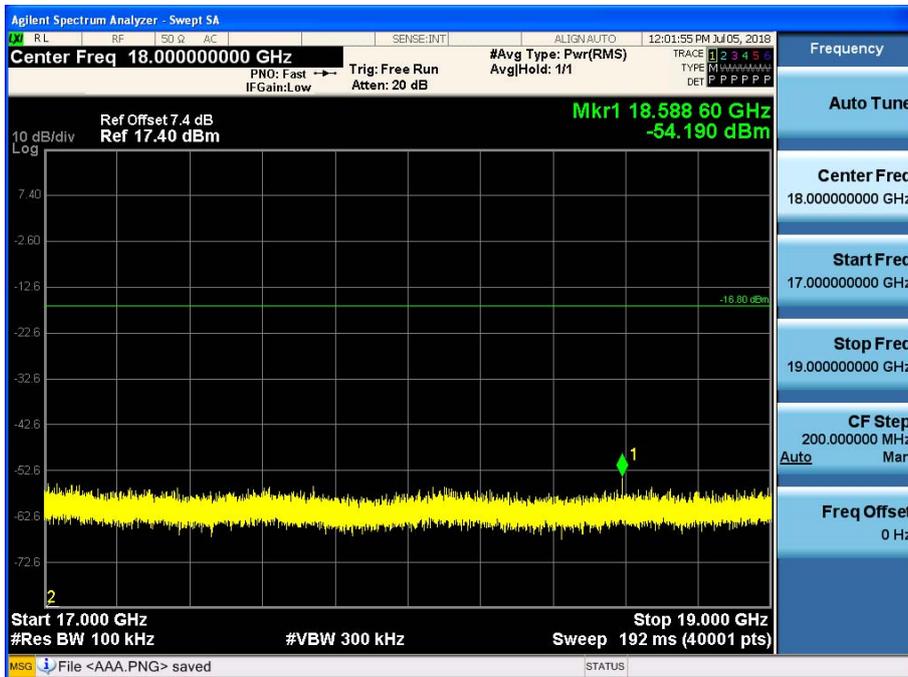

Test Plots (8DPSK)- 19 GHz - 21 GHz  
Spurious Emission (CH.39)

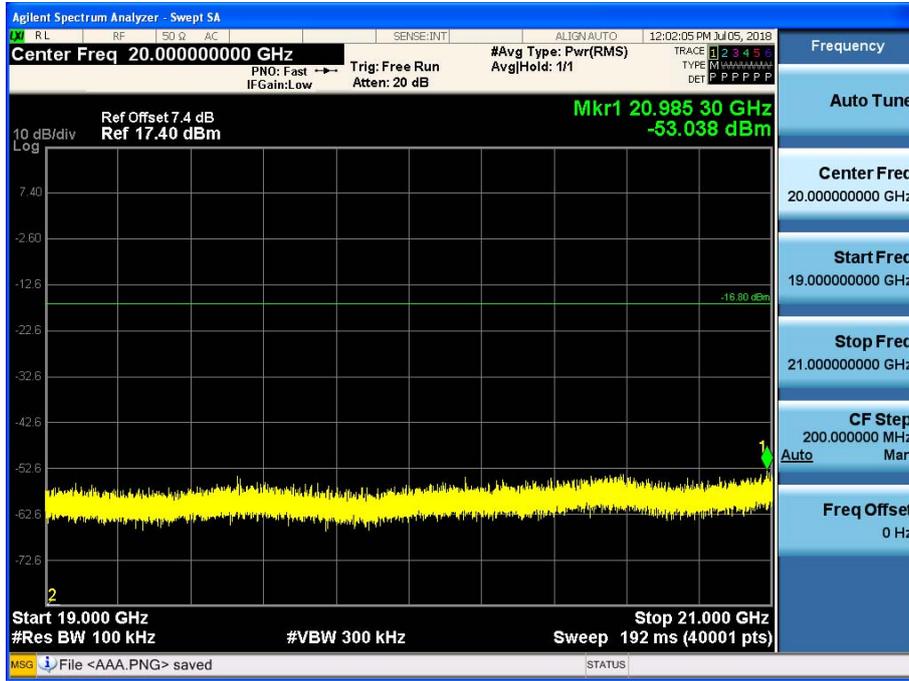

Test Plots (8DPSK)- 21 GHz - 23 GHz  
Spurious Emission (CH.39)

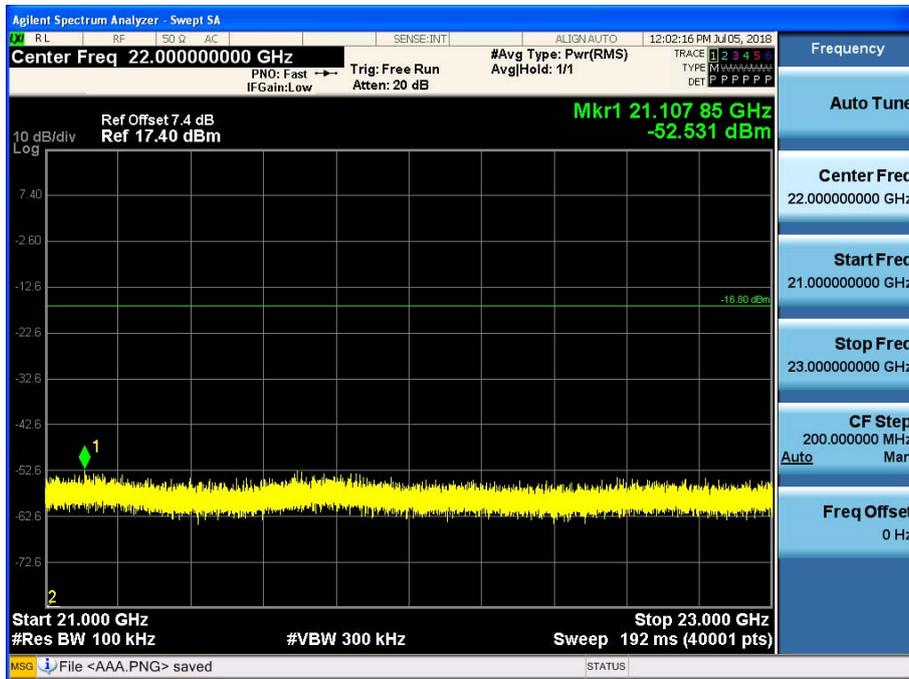

Test Plots (8DPSK)- 23 GHz - 25 GHz  
Spurious Emission (CH.39)



**9.6.2 RADIATED SPURIOUS EMISSIONS**


**LIMIT : §15.247(d), §15.205, §15.209 / RSS-Gen(Issue 5) Section 8.9, 8.10**

20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) / RSS-Gen 8.10, then the 15.209(a) / RSS-Gen 8.9 limit in the table below has to be followed.


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**TEST CONFIGURATION**


**Below 30 MHz**

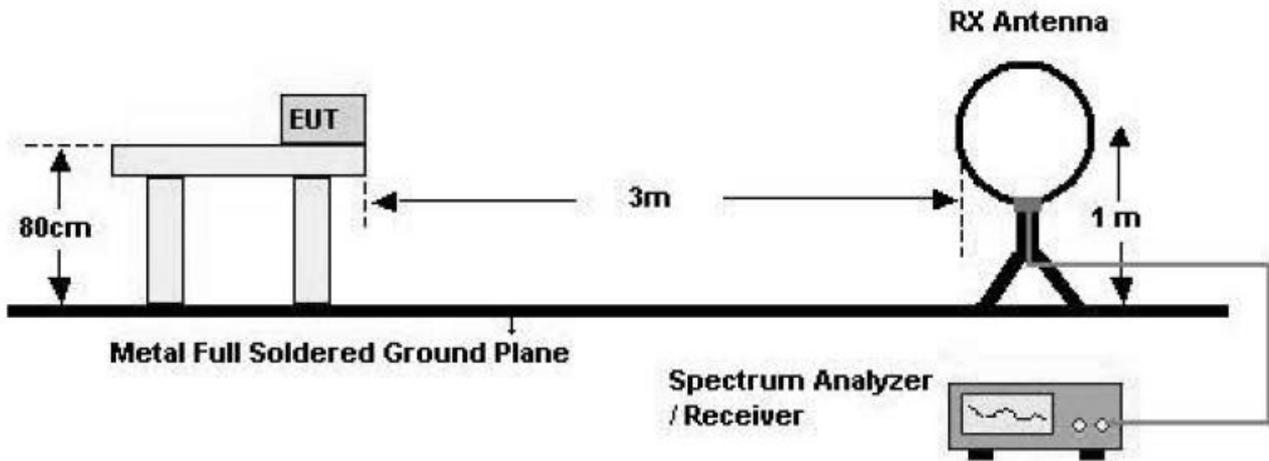

**30 MHz - 1 GHz**

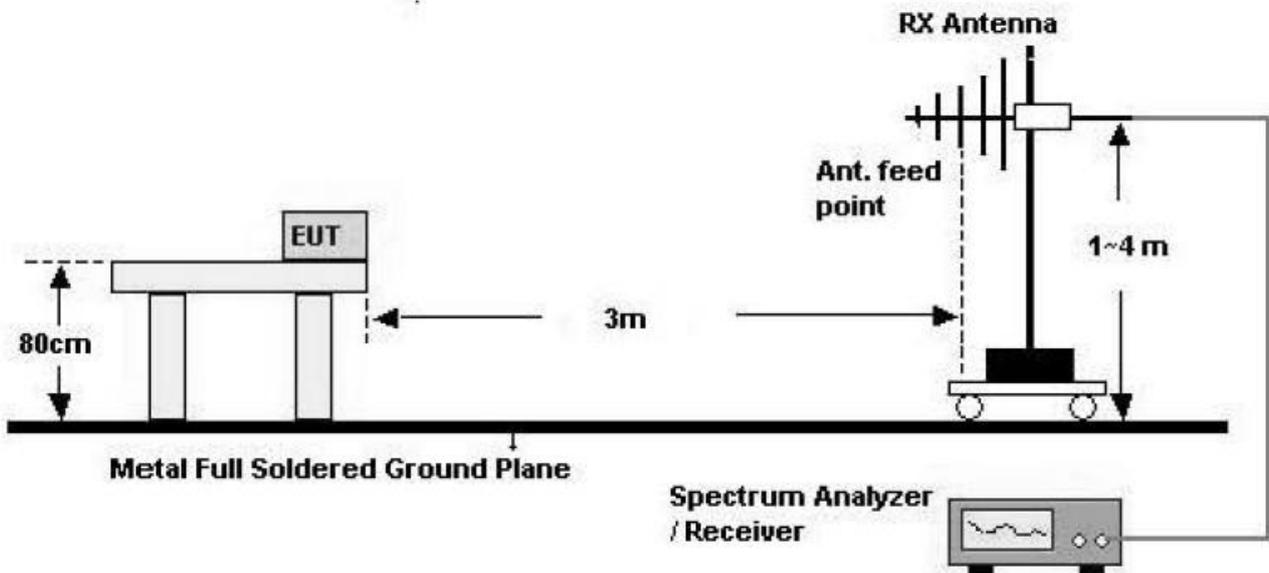

**Above 1 GHz**

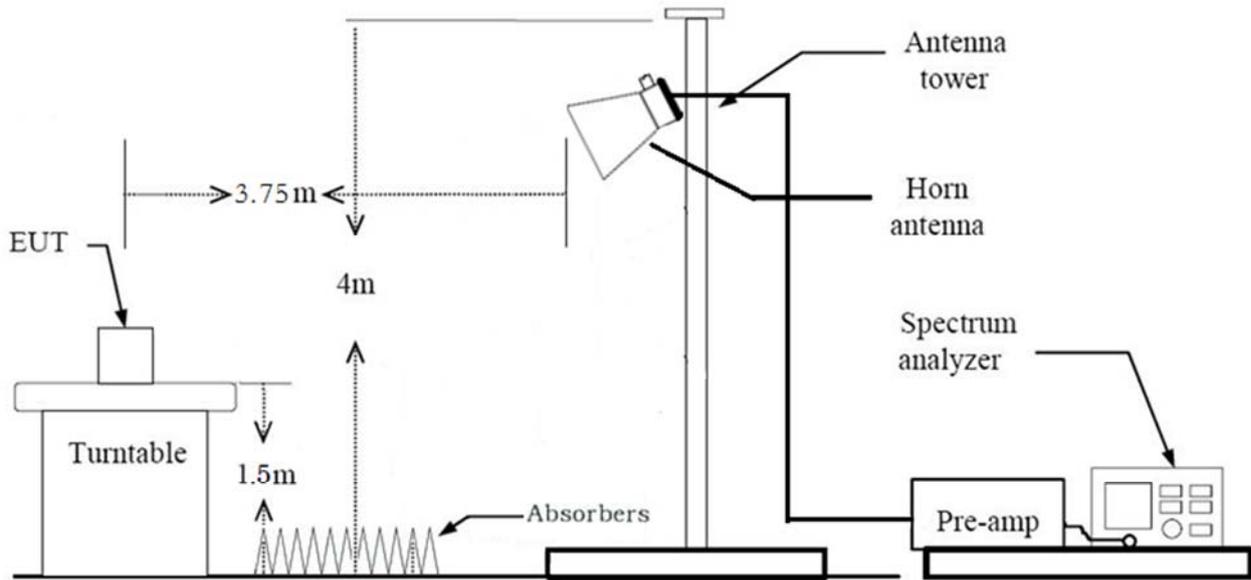

**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
  - a. Peak: 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW
  - b. Average: 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.

**Note :**

1. We are performed the RSE and radiated band edge using standard radiated method.
2. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
3. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
4. The duty cycle factor for BT mode.

<b>BT Mode</b>	<b>T<sub>on</sub></b> (ms)	<b>VBW(1/T)</b> (Hz)	<b>The actual setting value of VBW</b> (Hz)
<b>GFSK</b>	<b>2.880</b>	<b>347</b>	<b>1000</b>
<b><math>\pi/4</math>DQPSK</b>	<b>2.885</b>	<b>347</b>	<b>1000</b>
<b>8DPSK</b>	<b>2.885</b>	<b>347</b>	<b>1000</b>

**TEST RESULTS**

**9 kHz – 30MHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**TEST RESULTS**

**Below 1 GHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.28	2.07	V	53.35	73.98	20.63	PK
4804	38.65	2.07	V	40.72	53.98	13.26	AV
7206	50.74	9.57	V	60.31	73.98	13.67	PK
7206	37.23	9.57	V	46.8	53.98	7.18	AV
4804	51.47	2.07	H	53.54	73.98	20.44	PK
4804	38.84	2.07	H	40.91	53.98	13.07	AV
7206	51.01	9.57	H	60.58	73.98	13.40	PK
7206	37.33	9.57	H	46.9	53.98	7.08	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.29	2.07	V	52.36	73.98	21.62	PK
4804	37.38	2.07	V	39.45	53.98	14.53	AV
7206	50.06	9.57	V	59.63	73.98	14.35	PK
7206	36.95	9.57	V	46.52	53.98	7.46	AV
4804	50.89	2.07	H	52.96	73.98	21.02	PK
4804	37.90	2.07	H	39.97	53.98	14.01	AV
7206	50.24	9.57	H	59.81	73.98	14.17	PK
7206	37.07	9.57	H	46.64	53.98	7.34	AV

Operation Mode: CH Low( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.99	2.07	V	53.06	73.98	20.92	PK
4804	37.43	2.07	V	39.5	53.98	14.48	AV
7206	50.14	9.57	V	59.71	73.98	14.27	PK
7206	36.37	9.57	V	45.94	53.98	8.04	AV
4804	51.36	2.07	H	53.43	73.98	20.55	PK
4804	37.77	2.07	H	39.84	53.98	14.14	AV
7206	50.70	9.57	H	60.27	73.98	13.71	PK
7206	36.99	9.57	H	46.56	53.98	7.42	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log(\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms

- d. Duty Cycle Correction(AFH) =  $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$
- e. We applied DCCF in the test result which hopping channel number is 20.
- 9. We have done Normal Mode and EDR Mode test.
- 10. This test is performed with hopping off.
- 11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.75	2.56	V	53.31	73.98	20.67	PK
4882	38.05	2.56	V	40.61	53.98	13.37	AV
7323	50.13	9.72	V	59.85	73.98	14.13	PK
7323	36.68	9.72	V	46.4	53.98	7.58	AV
4882	51.07	2.56	H	53.63	73.98	20.35	PK
4882	38.27	2.56	H	40.83	53.98	13.15	AV
7323	50.24	9.72	H	59.96	73.98	14.02	PK
7323	36.72	9.72	H	46.44	53.98	7.54	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.58	2.56	V	53.14	73.98	20.84	PK
4882	37.03	2.56	V	39.59	53.98	14.39	AV
7323	50.43	9.72	V	60.15	73.98	13.83	PK
7323	36.69	9.72	V	46.41	53.98	7.57	AV
4882	50.76	2.56	H	53.32	73.98	20.66	PK
4882	37.44	2.56	H	40	53.98	13.98	AV
7323	50.61	9.72	H	60.33	73.98	13.65	PK
7323	36.72	9.72	H	46.44	53.98	7.54	AV

Operation Mode: CH Mid( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.43	2.56	V	52.99	73.98	20.99	PK
4882	37.09	2.56	V	39.65	53.98	14.33	AV
7323	50.16	9.72	V	59.88	73.98	14.10	PK
7323	36.23	9.72	V	45.95	53.98	8.03	AV
4882	50.99	2.56	H	53.55	73.98	20.43	PK
4882	37.42	2.56	H	39.98	53.98	14.00	AV
7323	50.63	9.72	H	60.35	73.98	13.63	PK
7323	36.70	9.72	H	46.42	53.98	7.56	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log(\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms

- d. Duty Cycle Correction(AFH) =  $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$
- e. We applied DCCF in the test result which hopping channel number is 20.
- 9. We have done Normal Mode and EDR Mode test.
- 10. This test is performed with hopping off.
- 11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	51.12	2.66	V	53.78	73.98	20.20	PK
4960	39.24	2.66	V	41.90	53.98	12.08	AV
7440	51.27	10.20	V	61.47	73.98	12.51	PK
7440	36.69	10.20	V	46.89	53.98	7.09	AV
4960	51.55	2.66	H	54.21	73.98	19.77	PK
4960	39.60	2.66	H	42.26	53.98	11.72	AV
7440	51.44	10.20	H	61.64	73.98	12.34	PK
7440	36.84	10.20	H	47.04	53.98	6.94	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	51.27	2.66	V	53.93	73.98	20.05	PK
4960	37.93	2.66	V	40.59	53.98	13.39	AV
7440	51.30	10.20	V	61.5	73.98	12.48	PK
7440	36.65	10.20	V	46.85	53.98	7.13	AV
4960	51.74	2.66	H	54.4	73.98	19.58	PK
4960	38.40	2.66	H	41.06	53.98	12.92	AV
7440	51.36	10.20	H	61.56	73.98	12.42	PK
7440	36.73	10.20	H	46.93	53.98	7.05	AV

Operation Mode: CH High ( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.98	2.66	V	53.64	73.98	20.34	PK
4960	37.59	2.66	V	40.25	53.98	13.73	AV
7440	51.15	10.20	V	61.35	73.98	12.63	PK
7440	36.53	10.20	V	46.73	53.98	7.25	AV
4960	51.51	2.66	H	54.17	73.98	19.81	PK
4960	38.23	2.66	H	40.89	53.98	13.09	AV
7440	51.38	10.20	H	61.58	73.98	12.40	PK
7440	36.72	10.20	H	46.92	53.98	7.06	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log(\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms

d. Duty Cycle Correction(AFH) =  $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$

e. We applied DCCF in the test result which hopping channel number is 20.


9. We have done Normal Mode and EDR Mode test.

10. This test is performed with hopping off.

11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ **RESULT PLOTS (Worst case : Z-H)**

**Radiated Spurious Emissions plot – Average Reading (GFSK, Ch.78 2nd Harmonic)**

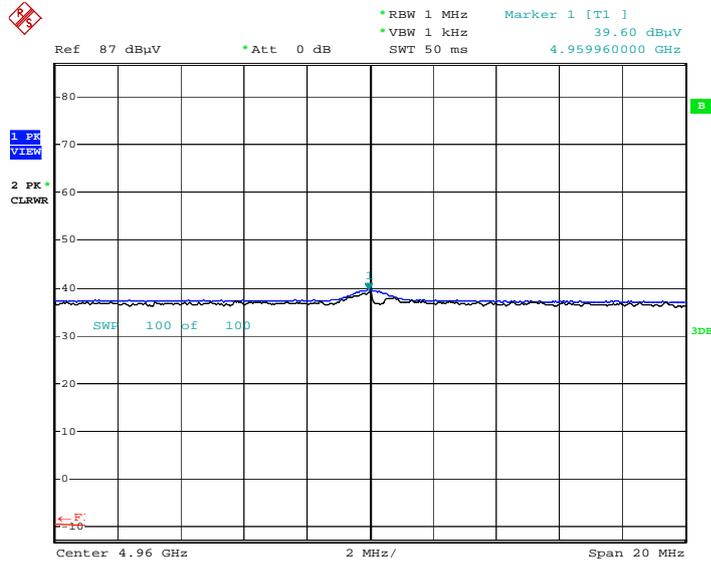


Date: 23.MAY.2003 08:25:05

**Radiated Spurious Emissions plot – Peak Reading (GFSK, Ch.78 2nd Harmonic)**

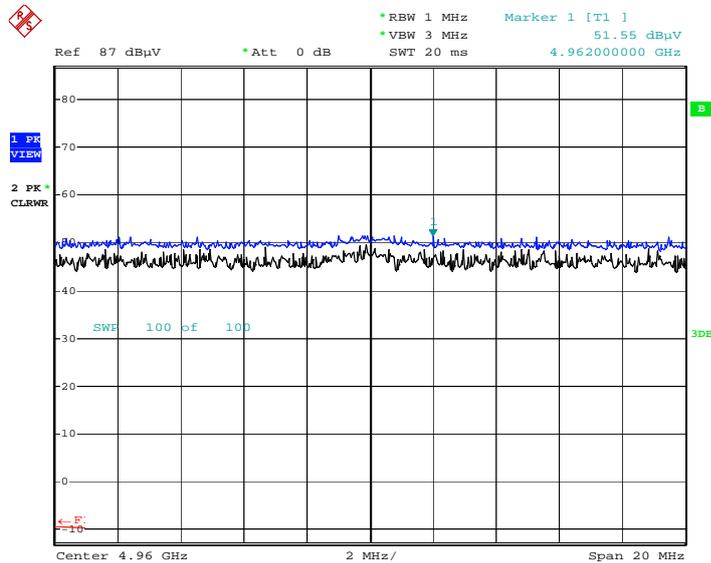


Date: 23.MAY.2003 08:25:41

**Radiated Spurious Emissions plot – Average Reading (GFSK, Ch.78 3rd Harmonic)**

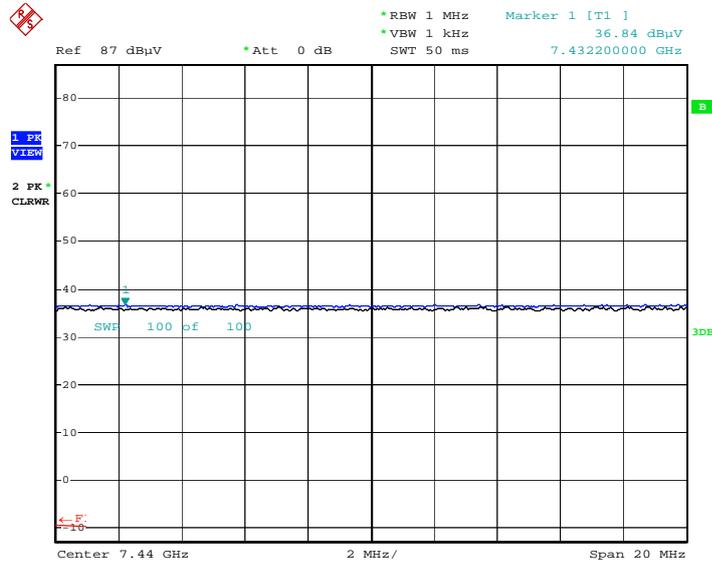

Date: 23.MAY.2003 08:28:58

**Radiated Spurious Emissions plot – Peak Reading (GFSK, Ch.78 3rd Harmonic)**

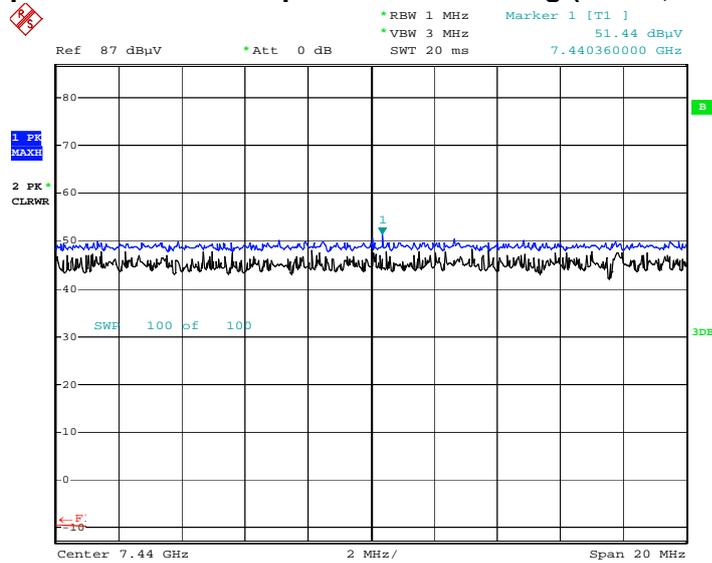

Date: 23.MAY.2003 08:27:52

### 9.6.3 RADIATED RESTRICTED BAND EDGES

#### Test Requirements and limit, §15.247(d), §15.205, §15.209 / RSS-Gen(Issue 5) Section 8.10

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) / RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	24.79	35.36	H	0	60.15	73.98	13.83	PK
2390.0	11.74	35.36	H	-24.73	22.37	53.98	31.61	AV
2390.0	24.59	35.36	V	0	59.95	73.98	14.03	PK
2390.0	11.72	35.36	V	-24.73	22.35	53.98	31.63	AV
2483.5	29.81	35.73	H	0	65.54	73.98	8.44	PK
2483.5	26.27	35.73	H	-24.73	37.27	53.98	16.71	AV
2483.5	28.62	35.73	V	0	64.35	73.98	9.63	PK
2483.5	25.18	35.73	V	-24.73	36.18	53.98	17.80	AV

Operation Mode EDR(8DPSK)  
 Operating Frequency 2402 MHz, 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	24.53	35.36	H	0	59.89	73.98	14.09	PK
2390.0	11.57	35.36	H	-24.73	22.20	53.98	31.78	AV
2390.0	24.27	35.36	V	0	59.63	73.98	14.35	PK
2390.0	11.53	35.36	V	-24.73	22.16	53.98	31.82	AV
2483.5	29.33	35.73	H	0	65.06	73.98	8.92	PK
2483.5	23.68	35.73	H	-24.73	34.68	53.98	19.30	AV
2483.5	28.53	35.73	V	0	64.26	73.98	9.72	PK
2483.5	22.57	35.73	V	-24.73	33.57	53.98	20.41	AV

Operation Mode EDR( $\pi$ /4DQPSK)  
 Operating Frequency 2402 MHz , 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	24.20	35.36	H	0	59.56	73.98	14.42	PK
2390.0	11.51	35.36	H	-24.73	22.14	53.98	31.84	AV
2390.0	24.15	35.36	V	0	59.51	73.98	14.47	PK
2390.0	11.50	35.36	V	-24.73	22.13	53.98	31.85	AV
2483.5	29.21	35.73	H	0	64.94	73.98	9.04	PK
2483.5	23.70	35.73	H	-24.73	34.70	53.98	19.28	AV
2483.5	28.74	35.73	V	0	64.47	73.98	9.51	PK
2483.5	22.53	35.73	V	-24.73	33.53	53.98	20.45	AV


\*A.F. : Antenna Factor  
 C.L. : Cable Loss  
 D.F. : Distance Factor

**Notes:**

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Distance Factor + Duty Cycle Correction Factor
3. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
5. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20\log$  (Worst Case Dwell Time/ 100ms) dB = -30.752 dB
6. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20\log$  (Worst Case Dwell Time/ 100ms) dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
7. We have done Normal Mode, EDR Mode.
8. This test is performed with hopping off.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ **RESULT PLOTS (Worst case : X-H)**

**Radiated Restricted Band Edges plot – Average Reading (GFSK, Ch.78)**

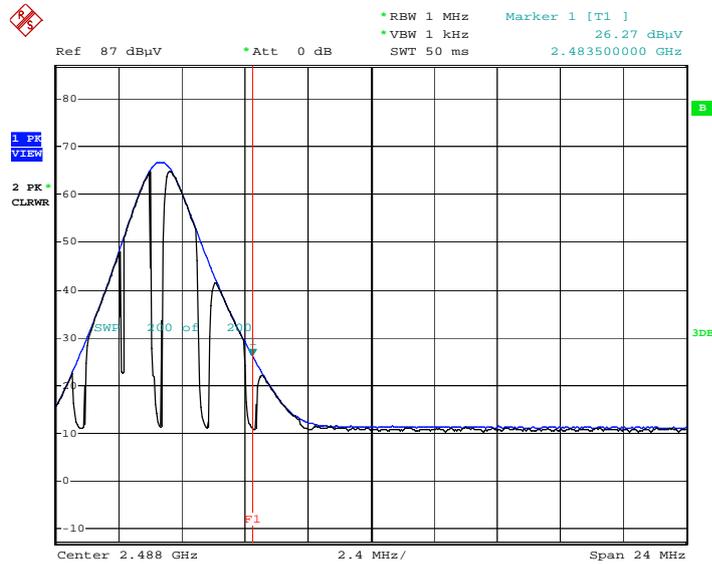

Date: 23.MAY.2003 02:12:24

**Radiated Restricted Band Edges plot – Peak Reading (GFSK, Ch.78)**

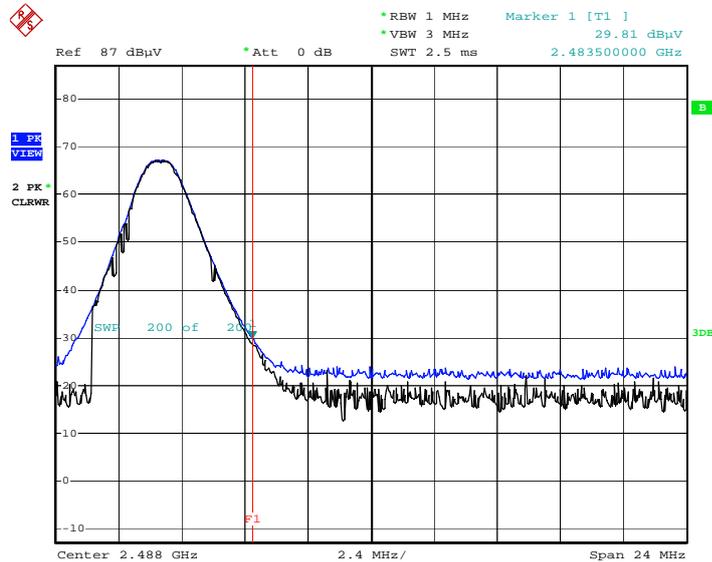

Date: 23.MAY.2003 02:11:49

**Note : Only the worst case plots for Radiated Restricted Band Edges.**

**9.6.4 RECEIVER SPURIOUS EMISSIONS**

ISED Rule(s): RSS-GEN  
 Test Requirements: Blow the table  
 Operating conditions: Under normal test conditions  
 Method of testing: Radiated

S/A. Settings: F < 1 GHz: RBW: 120 kHz, VBW: 300 kHz (Quasi Peak)  
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)  
 Mode of operation: Receive

Frequency (MHz)	Field Strength (microvolts/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

**Operation Mode: Receive:**

30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No critical peaks found							

Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No critical peaks found							

## 9.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

### SAMPLE CALCULATION

Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ **RESULT PLOTS**

**Conducted Emissions (Line 1)**

EMI Auto Test(3)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LGSBWAC92  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: BT\_MODE\_N

FCC CLASS B

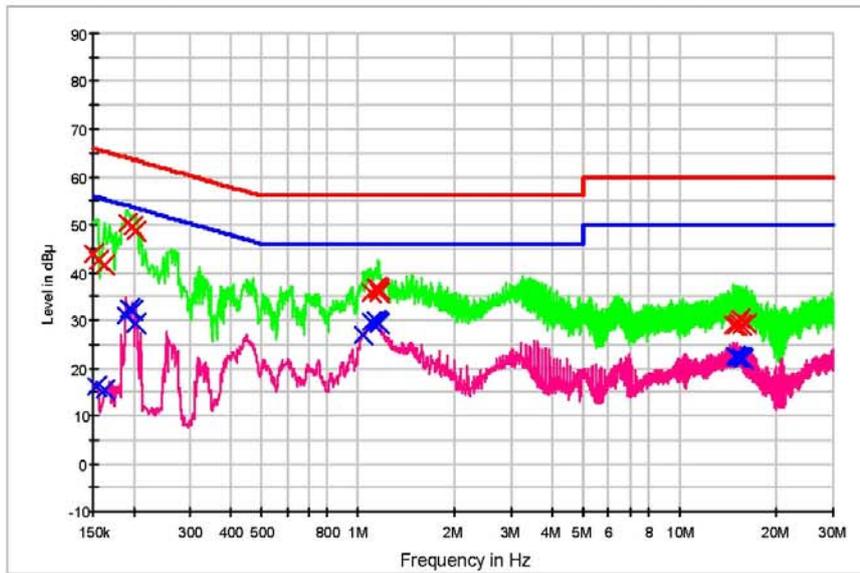

— FCC CLASS B\_OP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-OPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	43.9	9.000	Off	N	9.6	22.1	66.0
0.156000	42.6	9.000	Off	N	9.6	23.1	65.7
0.162000	41.5	9.000	Off	N	9.6	23.8	65.4
0.192000	50.4	9.000	Off	N	9.6	13.5	63.9
0.198000	49.6	9.000	Off	N	9.6	14.1	63.7
0.204000	48.6	9.000	Off	N	9.6	14.8	63.4
1.096000	35.6	9.000	Off	N	9.7	20.4	56.0
1.138000	36.8	9.000	Off	N	9.7	19.2	56.0
1.144000	36.9	9.000	Off	N	9.7	19.1	56.0
1.152000	36.6	9.000	Off	N	9.7	19.4	56.0
1.156000	36.3	9.000	Off	N	9.7	19.7	56.0
1.166000	35.7	9.000	Off	N	9.7	20.3	56.0
14.616000	28.9	9.000	Off	N	10.1	31.1	60.0
15.028000	29.0	9.000	Off	N	10.1	31.0	60.0
15.238000	29.6	9.000	Off	N	10.1	30.4	60.0
15.446000	30.2	9.000	Off	N	10.1	29.8	60.0
15.650000	29.1	9.000	Off	N	10.1	30.9	60.0
16.066000	29.4	9.000	Off	N	10.1	30.6	60.0

2018-07-18

오후 12:57:46

EMI Auto Test(3)

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	16.2	9.000	Off	N	9.6	39.6	55.8
0.162000	15.4	9.000	Off	N	9.6	40.0	55.4
0.190000	31.0	9.000	Off	N	9.6	23.1	54.0
0.194000	32.3	9.000	Off	N	9.6	21.6	53.9
0.198000	32.0	9.000	Off	N	9.6	21.7	53.7
0.204000	29.3	9.000	Off	N	9.6	24.2	53.4
1.032000	26.9	9.000	Off	N	9.7	19.1	46.0
1.096000	29.7	9.000	Off	N	9.7	16.3	46.0
1.134000	30.0	9.000	Off	N	9.7	16.0	46.0
1.144000	29.7	9.000	Off	N	9.7	16.3	46.0
1.150000	29.8	9.000	Off	N	9.7	16.2	46.0
1.160000	29.4	9.000	Off	N	9.7	16.6	46.0
14.822000	22.4	9.000	Off	N	10.1	27.6	50.0
15.028000	22.2	9.000	Off	N	10.1	27.8	50.0
15.236000	22.4	9.000	Off	N	10.1	27.6	50.0
15.444000	22.3	9.000	Off	N	10.1	27.7	50.0
15.654000	22.1	9.000	Off	N	10.1	27.9	50.0
15.858000	21.8	9.000	Off	N	10.1	28.2	50.0

2018-07-18

오후 12:57:46

**Conducted Emissions (Line 2)**

EMI Auto Test(3)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LGSBWAC92  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: BT\_MODE\_L1

FCC CLASS B

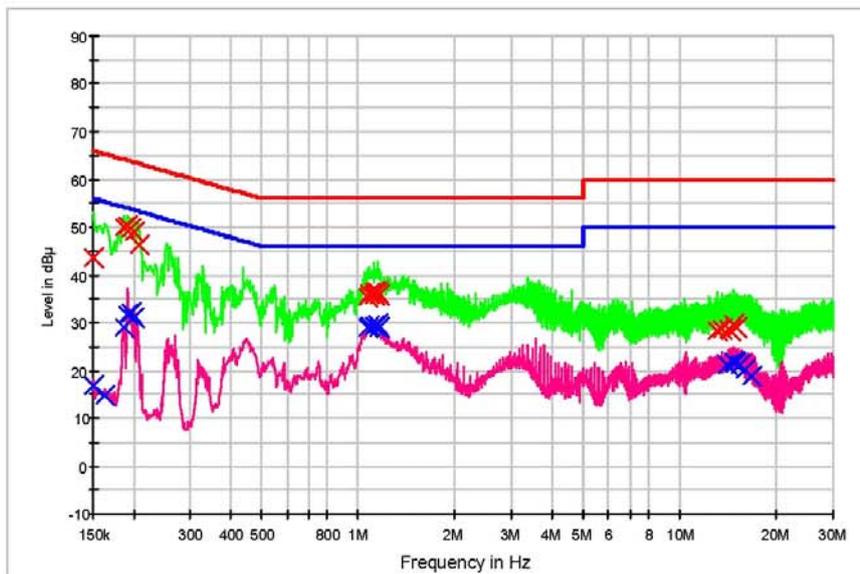

— FCC CLASS B\_OP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      x Final Result 1-DPK      x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	43.5	9.000	Off	L1	9.6	22.5	66.0
0.188000	50.0	9.000	Off	L1	9.6	14.1	64.1
0.192000	50.2	9.000	Off	L1	9.6	13.7	63.9
0.196000	49.8	9.000	Off	L1	9.6	14.0	63.8
0.202000	48.9	9.000	Off	L1	9.6	14.6	63.5
0.208000	46.4	9.000	Off	L1	9.6	16.9	63.3
1.074000	35.4	9.000	Off	L1	9.7	20.6	56.0
1.080000	36.2	9.000	Off	L1	9.7	19.8	56.0
1.116000	35.8	9.000	Off	L1	9.7	20.2	56.0
1.122000	36.3	9.000	Off	L1	9.7	19.7	56.0
1.144000	36.4	9.000	Off	L1	9.7	19.6	56.0
1.158000	35.8	9.000	Off	L1	9.7	20.2	56.0
13.100000	28.2	9.000	Off	L1	10.0	31.8	60.0
13.514000	28.6	9.000	Off	L1	10.0	31.4	60.0
14.206000	28.6	9.000	Off	L1	10.0	31.4	60.0
14.382000	28.2	9.000	Off	L1	10.0	31.8	60.0
14.686000	29.6	9.000	Off	L1	10.0	30.4	60.0
15.102000	29.1	9.000	Off	L1	10.0	30.9	60.0

2018-07-18

오후 1:12:40

EMI Auto Test(3)

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	16.6	9.000	Off	L1	9.6	39.4	56.0
0.162000	14.9	9.000	Off	L1	9.6	40.5	55.4
0.188000	28.9	9.000	Off	L1	9.6	25.3	54.1
0.192000	31.6	9.000	Off	L1	9.6	22.3	53.9
0.196000	31.9	9.000	Off	L1	9.6	21.8	53.8
0.200000	31.0	9.000	Off	L1	9.6	22.6	53.6
1.074000	29.1	9.000	Off	L1	9.7	16.9	46.0
1.082000	29.2	9.000	Off	L1	9.7	16.8	46.0
1.116000	29.5	9.000	Off	L1	9.7	16.5	46.0
1.122000	29.4	9.000	Off	L1	9.7	16.6	46.0
1.144000	29.8	9.000	Off	L1	9.7	16.2	46.0
1.158000	29.1	9.000	Off	L1	9.7	16.9	46.0
13.998000	21.2	9.000	Off	L1	10.0	28.8	50.0
14.692000	21.9	9.000	Off	L1	10.0	28.1	50.0
14.830000	21.5	9.000	Off	L1	10.0	28.5	50.0
15.376000	21.3	9.000	Off	L1	10.0	28.7	50.0
16.008000	20.1	9.000	Off	L1	10.0	29.9	50.0
16.734000	18.9	9.000	Off	L1	10.0	31.1	50.0

2018-07-18

오후 1:12:40

## 10. LIST OF TEST EQUIPMENT

### 10.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/20/2017	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/22/2017	Annual	MY49431210
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2017	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/17/2018	Annual	100422

**10.2 LIST OF TEST EQUIPMENT(Radiated Test)**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	04/19/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	11/21/2017	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/21/2017	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/27/2017	Annual	101068-SZ
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	08/01/2017	Annual	4
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	07/10/2018	Annual	5
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/03/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2018	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/07/2018	Annual	2
WEINSCHL	56-10 / Attenuator(10 dB)	10/13/2017	Annual	72316
CERNEX	CBLU1183540 / Broadband Low Noise Amplifier	01/03/2018	Annual	24613
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	01/03/2018	Annual	24615
CERNEX	CBL18265035 / Power Amplifier	01/10/2018	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

---

## 11. APPENDIX A\_EUT AND TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1807-FI013-P