

Nemko Korea Co., Ltd.

155 & 159, Osan-Ro, Mohyeon-Eup, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 KOREA, REPUBLIC OF
TEL:+82 31 330-1700 FAX:+82 31 322 2332

FCC and IC SAR EVALUATION REPORT FOR CERTIFICATION

Applicant :

LG Electronics Inc.
222, LG-ro, Jinwi-myeon,
Pyeongtaek-si, Gyeonggi-do, 451-713,
Republic of Korea
Attn. : Eunyeo Ko

Dates of Issue : Aug 09, 2021
Test Report No. : NK-21-R-196
Test Site : Nemko Korea Co., Ltd.

FCC
IC

Brand Name

Contact Person

BEJLGSBWAC93
2703H-LGSBWAC93



LG Electronics Inc.
222, LG-ro, Jinwi-myeon,
Pyeongtaek-si, Gyeonggi-do,
451-713, Republic of Korea
Eunyeo Ko
Telephone No. : +82-10-2210-7856

Applied Standard: FCC 47 CFR Part 2(2.1093) and IC RSS-102 Issue 5
Classification: Digital Transmission System (DTS)
Unlicensed National Information Infrastructure(UNII)
EUT Type: Flat Panel Digital X-Ray Detector

This form is only for use by Nemko Korea, or by others according to special agreement with Nemko Korea. The report may be reproduced in full. Partial reproduction may only be made with the written content of Nemko Korea. This report apply only to the sample(s) tested. It is the manufacturer's responsibility to assure the additional production units of this product manufactured with identical electrical and mechanical components. The manufacturer is responsible to the Competent Authorities in Europe for any modifications made to the product which results in non-compliance to the relevant regulation

 Aug. 09. 2021

Tested By : Wonjae Song
Engineer

 Aug. 09. 2021

Reviewed By : Seungyong Shin
Technical Manager

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Aug 09, 2021	Initial issue	

TABLE OF CONTENTS


1.	Scope	5
2.	Introduction (Site Description)	6
	2.1 Test facility	6
	2.2 Accreditation and listing	7
3.	Test Conditions & EUT Information	8
	3.1 Operation During Test	8
	3.1.1 Operating Environment	8
	3.1.2 Table of test power setting	8
	3.1.3 Table of test channel	11
	3.1.4 Antenna TX mode information	12
	3.1.5 Additional Information Related to Testing	13
	3.2 Support Equipment	13
	3.3 Maximum Target power among production Units	13
	3.4 SAR Testing EUT Configuration	15
	3.5 SAR Test Consideration	16
	3.6 Antenna Location	17
	3.7 EUT Information	18
	3.8 Description of change	20
	3.9 Modifications	20
4.	Guidance Applied	21
5.	Description of Test Equipment	22
	5.1 SAR Measurement Setup	22
	5.2 E-field Probe	23
	5.3 SAM Phantom	24
	5.4 Simulation Mixture Characterization	25
	5.5 Device Holder for Transmitters	27
6.	SAR Measurement Procedure	28
7.	Limits for Specific Absorption rate(SAR)	29

8. Measurement Uncertainty	30
9. Output Power Measurement	31
9.1 Measurement procedure for Output Power	31
9.2 Conducted RF Output Power (Unit: dBm)	32
10. System Verification	69
10.1 Tissue Verification	70
10.2 Test System Verification	70
10.3 System Verification Test Setup	72
11. SAR Measurement Results	73
12. Test Equipment	78
13. Conclusion	80
Appendix A. Plots of SAR Results	80
Appendix B. Plots of System Verification	90
Appendix C. Calibration Report of the Probe	105
Appendix D. Calibration Report of the Dipole Antenna	115

1. SCOPE

Measurement and determination of electromagnetic field intended to be used at a position near the human body with radio frequency device at distance up to and including 200mm from a human body for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 2 and IC RSS-102 Issue5.

Responsible Party :	LG Electronics Inc.
Contact Person :	Eunyeek Ko
Manufacturer :	LG Electronics Inc. 77, Sanho-daero, Gumi-si , Gyeongsangbuk-do, 39381, Republic of Korea

- FCC ID: BEJLGSBWAC93
- IC: 2703H-LGSBWAC93
- Model: LGSBWAC93
- HVIN: TWCM-K504D
- Brand Name: 
- EUT Type: Flat Panel Digital X-Ray Detector
- Classification: Digital Transmission System (DTS)
Unlicensed National Information Infrastructure(UNII)
- Test Procedures(s): IEC/IEEE 62209-1528:2020
IEEE 1528-2013
KDB 447498 D01 General RF exposure Guidance v06
- Dates of Test: June 23, 2021 ~ Aug 03, 2021
- Place of Tests: Nemko Korea Co., Ltd.

2. INTRODUCTION

2.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014), the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. FCC ID : BEJLGSBWAC93** and **IC : 2703H-LGSBWAC93**.

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address 155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 KOREA, REPUBLIC OF.

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 km (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 km (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.4-2014 according to §2.948.









Nemko Korea Co., Ltd.
EMC Lab.
159, Osan-ro, Mohyeon-myeon,
Cheoin-gu, Yongin-si, Gyeonggi-do,
16885, Republic of Korea.
Tel)+82-31-330-1700
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab. and Incheon Airport.

2.2 Accreditation and listing

Accreditation type		Accreditation number
	CAB Accreditation for DOC	Designation No. KR0026
	KOLAS Accredited Lab. (Korea Laboratory Accreditation Scheme)	Registration No. KT155
	Canada IC Registered site	Site No. 2040E
	VCCI registration site(RE/CE/Telecom CE)	Member No. 2118
	EMC CBTL	-
	KCC(RRL)Designated Lab.	Registration No. KR0026

3. TEST CONDITIONS & EUT INFORMATION

3.1 Operation During Test

The EUT is the SISO, MIMO(CDD,SDM) transceiver which is the 802.11a/b/g/n/ac mode (802.11a/b/g/n(20,40MHz)/ac(20,40,80MHz) : 1TX/RX, 2TX/RX.

The Laptop was used to control the EUT to transmit the wanted TX channel by the testing program (MT7668 QA 0.0.1.94) which manufacturer supported. The EUT was tested at the lowest channel, middle channel and the highest channel with the maximum output power in accordance with the manufacturer's specifications. The worst data were recorded in the report.

3.1.1 Operating Environment

Parameters	Recording during test	Accepted deviation
Ambient temperature	(21.0 ~ 21.6) °C	(18 ~ 25) °C
Relative Humidity	(52.0 ~ 56.0) %	(30 ~ 70) %

3.1.2 Table of test power setting

Frequency	Mode	Power setting Level (SISO)	Power setting Level (MIMO)
2412 MHz	802.11b	12.5	12.5
	802.11g	12.5	12.5
	802.11n (20 MHz)	12.5	12.5
2437 MHz	802.11b	13.5	13.5
	802.11g	13.5	13.5
	802.11n (20 MHz)	14.0	14.0
2462 MHz	802.11b	14.0	14.0
	802.11g	13.0	13.0
	802.11n (20 MHz)	14.0	14.0
2467 MHz	802.11b	13.5	13.5
	802.11g	13.5	13.5
	802.11n (20 MHz)	13.5	13.5
2472 MHz	802.11b	13.5	13.5
	802.11g	11.5	11.5
	802.11n (20 MHz)	12.0	12.0

Frequency	Mode	Power setting Level (SISO)	Power setting Level (MIMO)
2422 MHz	802.11n (40 MHz)	11.0	11.0
2437 MHz		18.0	18.0
2452 MHz		14.0	14.0
5180 MHz	802.11a	11.5	11.5
	802.11n (20 MHz)	12.0	12.0
	802.11ac (20 MHz)	10.0	10.0
5200 MHz	802.11a	10.0	10.0
	802.11n (20 MHz)	11.0	11.0
	802.11ac (20 MHz)	9.5	9.5
5240 MHz	802.11a	7.5	7.5
	802.11n (20 MHz)	9.0	9.0
	802.11ac (20 MHz)	8.5	8.5
5190 MHz	802.11n (40 MHz)	7.5	7.5
	802.11ac (40 MHz)	7.0	7.0
5230 MHz	802.11n (40 MHz)	13.0	13.0
	802.11ac (40 MHz)	13.0	13.0
5210 MHz	802.11ac (80 MHz)	9.5	9.5
5260 MHz	802.11a	7.0	7.0
	802.11n (20 MHz)	8.5	8.5
	802.11ac (20 MHz)	9.5	9.5
5300 MHz	802.11a	8.5	8.5
	802.11n (20 MHz)	9.0	9.0
	802.11ac (20 MHz)	13.0	13.0
5320 MHz	802.11a	9.5	9.5
	802.11n (20 MHz)	11.0	11.0
	802.11ac (20 MHz)	13.0	13.0
5270 MHz	802.11n (40 MHz)	11.0	11.0
	802.11ac (40 MHz)	13.0	13.0
5310 MHz	802.11n (40 MHz)	10.0	10.0
	802.11ac (40 MHz)	11.0	11.0

Frequency	Mode	Power setting Level (SISO)	Power setting Level (MIMO)
5290 MHz	802.11ac (80 MHz)	11.0	11.0
5500 MHz	802.11a	11.0	11.0
	802.11n (20 MHz)	12.0	12.0
	802.11ac (20 MHz)	13.0	13.0
5580 MHz	802.11a	13.0	13.0
	802.11n (20 MHz)	13.0	13.0
	802.11ac (20 MHz)	13.0	13.0
5720 MHz	802.11a	13.0	13.0
	802.11n (20 MHz)	13.0	13.0
	802.11ac (20 MHz)	13.0	13.0
5510 MHz	802.11n (40 MHz)	9.5	9.5
	802.11ac (40 MHz)	8.5	8.5
5550 MHz	802.11n (40 MHz)	13.0	13.0
	802.11ac (40 MHz)	12.0	12.0
5710 MHz	802.11n (40 MHz)	13.0	13.0
	802.11ac (40 MHz)	13.0	13.0
5530 MHz	802.11ac (80 MHz)	10.5	10.5
5690 MHz	802.11ac (80 MHz)	13.0	13.0
5745 MHz	802.11a	13.0	13.0
	802.11n (20 MHz)	13.0	13.0
	802.11ac (20 MHz)	13.0	13.0
5785 MHz	802.11a	13.0	13.0
	802.11n (20 MHz)	13.0	13.0
	802.11ac (20 MHz)	13.0	13.0
5825 MHz	802.11a	13.0	13.0
	802.11n (20 MHz)	13.0	13.0
	802.11ac (20 MHz)	13.0	13.0
5755 MHz	802.11n (40 MHz)	13.0	13.0
	802.11ac (40 MHz)	13.0	13.0
5795 MHz	802.11n (40 MHz)	13.0	13.0
	802.11ac (40 MHz)	13.0	13.0
5775 MHz	802.11ac (80 MHz)	13.0	13.0

3.1.3 Table of test channels

Frequency band	Mode	Test Channel (CH)	Frequency (MHz)
DTS	802.11b,g,n (20 MHz)	1	2412
		6	2437
		11	2462
		12	2467
		13	2472
	802.11n (40 MHz)	3	2422
		6	2437
		9	2452
	U-NII-1	802.11a,n,ac (20 MHz)	36
40			5200
48			5240
802.11n,ac (40 MHz)		38	5190
		46	5230
802.11ac (80 MHz)		42	5210
U-NII-2A	802.11a,n,ac (20 MHz)	52	5260
		60	5300
		64	5320
	802.11n,ac (40 MHz)	54	5270
		62	5310
	802.11ac (80 MHz)	58	5290
U-NII-2C	802.11a,n,ac (20 MHz)	100	5500
		116	5580
		144	5720
	802.11n,ac (40 MHz)	102	5510
		110	5550
		142	5710
U-NII-2C	802.11ac (80 MHz)	106	5530
		138	5690
U-NII-3	802.11a,n,ac (20 MHz)	149	5745
		157	5785
		165	5825
	802.11n,ac (40 MHz)	151	5755
		159	5795
	802.11ac (80 MHz)	155	5775

3.1.4 Antenna TX mode information

Frequency band	Mode	Datarate	Antenna TX mode	MIMO	
				Support CDD	Support SDM
2.4 GHz	802.11b,g	All	■ 1TX, ■ 2TX	■ Yes, □ No	□ Yes, ■ No
	802.11n (20MHz)	NSS1MCS0~NSS1MCS7	■ 1TX, ■ 2TX	■ Yes, □ No	□ Yes, ■ No
		NSS2MCS8~NSS2MCS15	□ 1TX, ■ 2TX	□ Yes, ■ No	■ Yes, □ No
	802.11n (40MHz)	NSS1MCS0~NSS1MCS7	■ 1TX, ■ 2TX	■ Yes, □ No	□ Yes, ■ No
		NSS2MCS8~NSS2MCS15	□ 1TX, ■ 2TX	□ Yes, ■ No	■ Yes, □ No
	5 GHz	802.11a	All	■ 1TX, ■ 2TX	■ Yes, □ No
802.11n (20MHz)		NSS1MCS0~NSS1MCS7	■ 1TX, ■ 2TX	■ Yes, □ No	□ Yes, ■ No
		NSS2MCS8~NSS2MCS15	□ 1TX, ■ 2TX	□ Yes, ■ No	■ Yes, □ No
802.11n (40MHz)		NSS1MCS0~NSS1MCS7	■ 1TX, ■ 2TX	■ Yes, □ No	□ Yes, ■ No
		NSS2MCS8~NSS2MCS15	□ 1TX, ■ 2TX	□ Yes, ■ No	■ Yes, □ No
802.11ac (20MHz)		NSS1MCS0~NSS1MCS8	■ 1TX, ■ 2TX	■ Yes, □ No	□ Yes, ■ No
		NSS2MCS0~NSS2MCS8	□ 1TX, ■ 2TX	□ Yes, ■ No	■ Yes, □ No
802.11ac (40MHz)		NSS1MCS0~NSS1MCS9	■ 1TX, ■ 2TX	■ Yes, □ No	□ Yes, ■ No
		NSS2MCS0~NSS2MCS9	□ 1TX, ■ 2TX	□ Yes, ■ No	■ Yes, □ No
802.11ac (80MHz)		NSS1MCS0~NSS1MCS9	■ 1TX, ■ 2TX	■ Yes, □ No	□ Yes, ■ No
		NSS2MCS0~NSS2MCS9	□ 1TX, ■ 2TX	□ Yes, ■ No	■ Yes, □ No

Note:

1. CDD mode is Cyclic Delay Diversity mode.
2. SDM mode is Spatial Diversity Multiplexing mode.
3. For 802.11b,g, EUT support SISO, CDD mode for All.
4. For 802.11n(20 MHz,40MHz), EUT support SISO,CDD mode for NSS1MCS0~ NSS1MCS7 and SDM mode for NSS2MCS8~ NSS2MCS15.
5. For 802.11ac(20 MHz), EUT support SISO,CDD mode for NSS1MCS0~NSS1MCS8 and SDM mode for NSS2MCS0~NSS2MCS8.
6. For 802.11ac(40 MHz, 80 MHz), EUT support SISO,CDD mode for NSS1MCS0~NSS1MCS9 and SDM

mode for NSS2MCS0~NSS2MCS9.

7. CDD mode, $N_{SS} = 1$, SDM mode, $N_{SS} = 2$, where N_{SS} = number of spatial streams.
8. EUT doesn't support Beamforming transmission.

3.1.5 Additional Information Related to Testing

SAR testing was performed front side with a device-to-phantom separation distance of 0 mm. Except for the front side, the other side doesn't contact with the human body.

3.2 Support Equipment

Equipment	Manufacturer	Model Name	Serial Number
Laptop	LG	14T90P	008QCYQ562762
a.c.- d.c. Adapter	LG	ADT-65FSU-D03-EPK	HLNL5658958111092

3.3. Maximum Target power among production units

Tune up tolerance is specified in operation description. SAR values were scaled to the maximum tune-up power to determine compliance per KDB Publication 447498 D01v06.

Band & Mode			SISO[dBm]		MIMO[dBm]
			Ant1	Ant2	
DTS	802.11b	Maximum	16	16	21
		Nominal	15	15	18
		Minimum	14	14	17
	802.11g	Maximum	16	16	21
		Nominal	15	15	18
		Minimum	14	14	17
	802.11n (20 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
DTS	802.11n (40 MHz)	Maximum	20	20	23
		Nominal	19	19	22
		Minimum	18	18	21
U-NII-1	802.11a	Maximum	14	14	17
		Nominal	13	13	16
		Minimum	12	12	15
U-NII-2A	802.11a	Maximum	11	11	14
		Nominal	10	10	13
		Minimum	9	9	12

U-NII-2C	802.11a	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-3	802.11a	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-1	802.11n (20 MHz)	Maximum	14	14	17
		Nominal	13	13	16
		Minimum	12	12	15
U-NII-2A	802.11n (20 MHz)	Maximum	12	12	15
		Nominal	11	11	14
		Minimum	10	10	13
U-NII-2C	802.11n (20 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-3	802.11n (20 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-1	802.11n (40 MHz)	Maximum	14	14	17
		Nominal	13	13	16
		Minimum	12	12	15
U-NII-2A	802.11n (40 MHz)	Maximum	12	12	15
		Nominal	11	11	14
		Minimum	10	10	13
U-NII-2C	802.11n (40 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-3	802.11n (40 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-1	802.11ac (20 MHz)	Maximum	12	12	15
		Nominal	11	11	14
		Minimum	10	10	13
U-NII-2A	802.11ac (20 MHz)	Maximum	13	13	16
		Nominal	12	12	15
		Minimum	11	11	14
U-NII-2C	802.11ac (20 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-3	802.11ac (20 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-1	802.11ac (40 MHz)	Maximum	14	14	17
		Nominal	13	13	16
		Minimum	12	12	15

U-NII-2A	802.11ac (40 MHz)	Maximum	16	17	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-2C	802.11ac (40 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-3	802.11ac (40 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17
U-NII-1	802.11ac (80 MHz)	Maximum	10	10	13
		Nominal	9	9	12
		Minimum	8	8	11
U-NII-2A	802.11ac (80 MHz)	Maximum	11	11	14
		Nominal	10	10	13
		Minimum	9	9	12
U-NII-2C	802.11ac (80 MHz)	Maximum	14	14	17
		Nominal	13	13	16
		Minimum	12	12	15
U-NII-3	802.11ac (80 MHz)	Maximum	16	16	19
		Nominal	15	15	18
		Minimum	14	14	17

3.4 SAR testing EUT configuration

Device Type	Band/Mode	Device edge for SAR Testing					
		Front	Back	Left edge	Right edge	Top	Bottom
X-Ray detector	WLAN 2.4G, 5G	Yes	N/A	N/A	N/A	N/A	N/A
Human Body Contact		○	X	X	X	X	X

3.5 SAR Test consideration

Per FCC KDB 447498 D01v06, The SAR exclusion threshold for distance < 50mm is defined by the following equation.

$$\frac{(\text{max.power of channel,including tune-up tolerance,mW})}{(\text{min.test separation distance,mm})} \times \sqrt{f(\text{GHz})} \leq 3.0 \quad \{1 \text{ g SAR}\}$$

$$\frac{(\text{max.power of channel,including tune-up tolerance,mW})}{(\text{min.test separation distance,mm})} \times \sqrt{f(\text{GHz})} \leq 7.5 \quad \{10 \text{ g SAR}\}$$

Band (Ant)	Mode	Freq	Maximum Conducted power	Maximum tune up Power	E.I.R.P *)	Separation	FCC SAR exclusion			IC SAR exclusion	
							≤ 3.0	≤ 7.5	FCC SAR Test	IC Limit	IC SAR Test
		[GHz]	[mW]	[mW]	[mW]	[mm]	1-g SAR	10-g SAR		[mW]	
DTS (Ant1)	802.11n (40M)	2.437	76.74	96.61	149.28	5	30.16	N/A	Yes	≤ 4.07	Yes
DTS (Ant2)	802.11n (40M)	2.437	76.56	96.38	99.08	5	30.09	N/A	Yes	≤ 4.07	Yes
DTS (MIMO)	802.11n (40M)	2.437	157.40	198.15	179.89	5	61.87	N/A	Yes	≤ 4.07	Yes
UNII-1 (Ant1)	802.11n (40M)	5.230	24.83	31.26	32.14	5	14.30	N/A	Yes	≤ 1.25	Yes
UNII-1 (Ant2)	802.11n (20M)	5.180	19.50	24.55	44.67	5	11.17	N/A	Yes	≤ 1.27	Yes
UNII-1 (MIMO)	802.11n (40M)	5.230	42.85	53.95	150.61	5	24.68	N/A	Yes	≤ 1.25	Yes
UNII-2A (Ant1)	802.11ac (40M)	5.270	24.15	30.41	27.61	5	13.96	N/A	Yes	≤ 1.23	Yes
UNII-2A (Ant2)	802.11ac (40M)	5.270	18.58	23.39	35.48	5	10.74	N/A	Yes	≤ 1.23	Yes
UNII-2A (MIMO)	802.11ac (40M)	5.270	44.46	55.98	133.56	5	25.70	N/A	Yes	≤ 1.23	Yes
UNII-2C (Ant1)	802.11a	5.720	30.76	38.73	47.53	5	18.52	N/A	Yes	≤ 1.03	Yes
UNII-2C (Ant2)	802.11n (20M)	5.720	26.73	33.65	80.17	5	16.10	N/A	Yes	≤ 1.03	Yes
UNII-2C (MIMO)	802.11a	5.720	53.58	67.45	237.09	5	32.26	N/A	Yes	≤ 1.03	Yes
UNII-3 (Ant1)	802.11a	5.785	26.12	32.89	40.64	5	15.82	N/A	Yes	≤ 1.01	Yes
UNII-3 (Ant2)	802.11a	5.785	22.86	28.77	64.42	5	13.84	N/A	Yes	≤ 1.01	Yes
UNII-3 (MIMO)	802.11a	5.785	47.75	60.12	204.44	5	28.92	N/A	Yes	≤ 1.01	Yes

*) E.I.R.P = [Maximum conducted power] + [Ant gain(dBi)]

In case of FCC, SAR test was required for all modes.

Per RSS-102 issue 5, E.I.R.P was applied to testing, because E.I.R.P was higher than maximum tune up power.


IC SAR Limit was calculated using linear interpolation and below table.

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤ 5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤ 300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

For IC exclusion, SAR test was required for all modes.

3.6 Antenna Location


14HQ901G Antenna Location

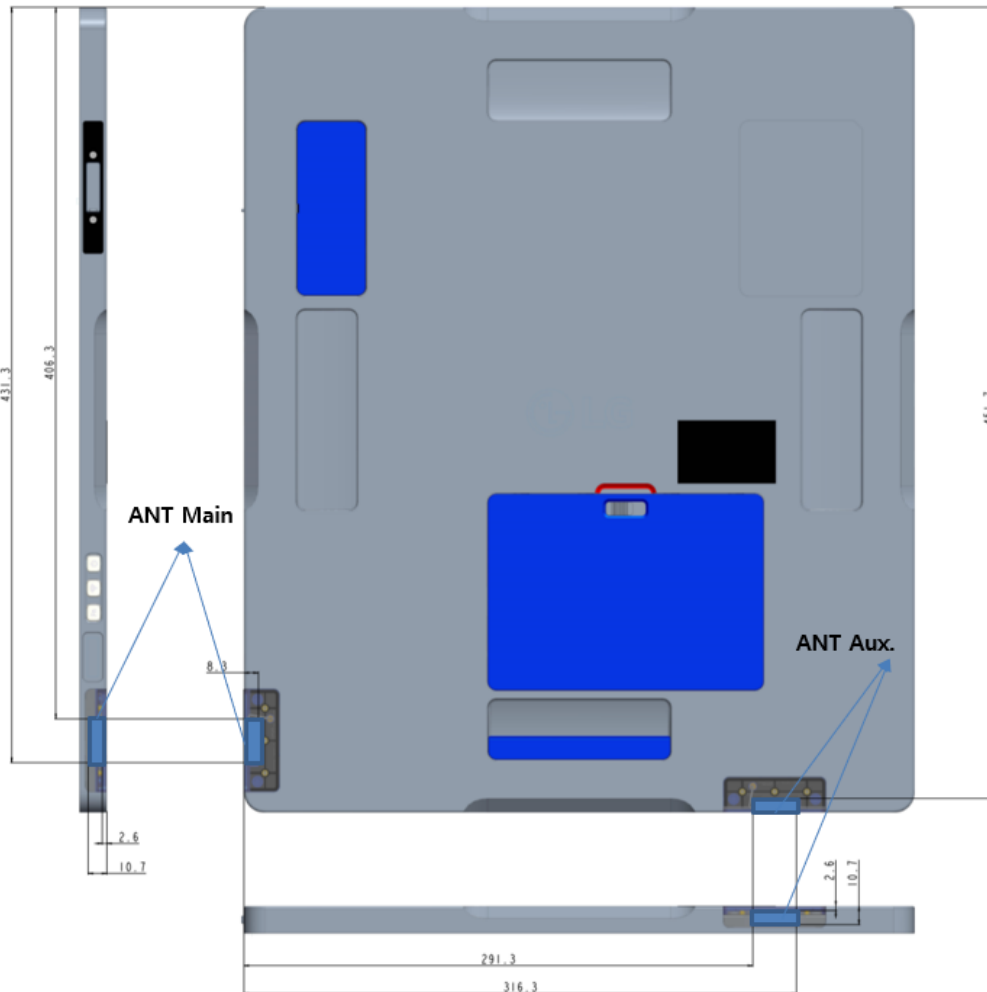

3.7 EUT Information

The EUT is the **LG Electronics In. Flat Panel Digital X-ray Detector FCC ID: BEJLGSBWAC93, IC: 2703H-LGSBWAC93.**

Specifications:

EUT Type	Flat Panel Digital X-ray Detector
Model Name	LGSBWAC93
Brand Name	
Frequency of Operation	<p><u>For DTS Band</u> 2 412 MHz to 2 472 MHz (802.11b,g,n(20 MHz)) 2 422 MHz to 2 452 MHz (802.11n(40 MHz))</p> <p><u>For U-NII-1 Band</u> 5 180 MHz to 5 240 MHz (802.11a,n,ac(20 MHz)) 5 190 MHz to 5 230 MHz (802.11n,ac(40 MHz)) 5 210 MHz (802.11n,ac(80 MHz))</p> <p><u>For U-NII-2A Band</u> 5 260 MHz to 5 320 MHz (802.11a,n,ac(20 MHz)) 5 270 MHz to 5 310 MHz (802.11n,ac(40 MHz)) 5 290 MHz (802.11n,ac(80 MHz))</p> <p><u>For U-NII-2C Band</u> 5 500 MHz to 5 720 MHz (802.11a,n,ac(20 MHz)) 5 510 MHz to 5 710 MHz (802.11n,ac(40 MHz)) 5 530 MHz to 5 690 MHz (802.11n,ac(80 MHz))</p> <p><u>For U-NII-3 Band</u> 5 745 MHz to 5 825 MHz (802.11a,n,ac(20 MHz)) 5 755 MHz to 5 795 MHz (802.11n,ac(40 MHz)) 5 775 MHz (802.11n,ac(80 MHz))</p>
Average Output Power (Conducted)	<p><u>For DTS Band</u> 802.11b : 18.29 dBm 802.11g : 17.67 dBm 802.11n (20 MHz) : 18.04 dBm 802.11n (40 MHz) : 21.97 dBm</p> <p><u>For U-NII-1 Band</u> 802.11a : 15.99 dBm 802.11n (20 MHz) : 16.23 dBm 802.11n (40 MHz) : 16.32 dBm 802.11ac (20 MHz) : 14.61 dBm 802.11ac (40 MHz) : 16.31 dBm 802.11ac (80 MHz) : 12.72 dBm</p> <p><u>For U-NII-2A Band</u> 802.11a : 12.11 dBm 802.11n (20 MHz) : 13.45 dBm 802.11n (40 MHz) : 14.41 dBm 802.11ac (20 MHz) : 15.63 dBm</p>

	802.11ac (40 MHz) : 16.48 dBm 802.11ac (80 MHz) : 13.72 dBm <u>For U-NII-2C Band</u> 802.11a : 17.29 dBm 802.11n (20 MHz) : 17.26 dBm 802.11n (40 MHz) : 17.27 dBm 802.11ac (20 MHz) : 17.05 dBm 802.11ac (40 MHz) : 16.95 dBm 802.11ac (80 MHz) : 15.49 dBm <u>For U-NII-3 Band</u> 802.11a : 16.79 dBm 802.11n (20 MHz) : 16.76 dBm 802.11n (40 MHz) : 16.74 dBm 802.11ac (20 MHz) : 16.72 dBm 802.11ac (40 MHz) : 16.78 dBm 802.11ac (80 MHz) : 16.77 dBm	
Highest Reported SAR	0.196 W/kg	
FCC Classification	Digital Transmission System (DTS) Unlicensed National Information Infrastructure (UNII)	
Channels	<u>For DTS Band</u> 802.11b,g,n (20 MHz) : 13 ch 802.11n (40 MHz) : 9 ch <u>For U-NII-1 Band</u> 802.11a,n,ac (20 MHz) : 4 ch 802.11n,ac (40 MHz) : 2 ch 802.11ac (80 MHz) : 1 ch <u>For U-NII-2A Band</u> 802.11a,n,ac (20 MHz) : 4 ch 802.11n,ac (40 MHz) : 2 ch 802.11ac (80 MHz) : 1 ch <u>For U-NII-2C Band</u> 802.11a,n,ac (20 MHz) : 9 ch 802.11n,ac (40 MHz) : 4 ch 802.11ac (80 MHz) : 2 ch <u>For U-NII-3 Band</u> 802.11a,n,ac (20 MHz) : 5 ch 802.11n,ac (40 MHz) : 2 ch 802.11ac (80 MHz) : 1 ch	
Modulation type	CCK, BPSK, QPSK, 16QAM, 64QAM, 256QAM (802.11 a,b,g,n,ac)	
Antenna Gain (peak)	ANT 0 (Aux)	2.89 dBi(802.11b,g,n in DTS band) 1.12 dBi(802.11a,n,ac in UNII-1 band) 0.58 dBi(802.11a,n,ac in UNII-2A band) 1.89 dBi(802.11a,n,ac in UNII-2C band) 1.92 dBi(802.11a,n,ac in UNII-3 band)
	ANT 1 (Main)	2.91 dBi(802.11b,g,n in DTS band)

	ANT 1 (Main)	3.60 dBi(802.11a,n,ac in UNII-1 band) 2.81 dBi(802.11a,n,ac in UNII-2A band) 4.77 dBi(802.11a,n,ac in UNII-2C band) 4.50 dBi(802.11a,n,ac in UNII-3 band)
Power	Battery : 7.7 Vdc, 4725 mAh	
Dimensions (L x W x H)	About 462.4 cm x 382 cm X 16 cm	
Weight	About 2166 g	
HVIN (Hardware Version Identification Number)	TWCM-K504D	
FVIN (Firmware Version Identification Number)	MT7668_V1.0	
Remarks	The above RF information of EUT is referred to the RF Module report. RF module(LGSBWAC93) report No.: HCT-RF-1904-FI005 HCT-RF-1904-FI004	

*) This antenna was applied to SAR testing in this report.

3.8 Description of change

- No Comment

3.9 Modifications

- No Comment

4. GUIDANCE APPLIED

The Specific Absorption Rate(SAR)testing specification, method, and procedure for this device is in Accordance with the following standards:

- FCC 47 CFR Part 2(2.1093)
- RSS-102 Issue 5
- IEEE 1528-2013
- IEC/IEEE 62209-1528
- FCC KDB Publication 447498 D01 v06
- FCC KDB Publication 865664 D01 v01r04
- FCC KDB Publication 865664 D02 v01r02
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)

5. DESCRIPTION OF TEST EQUIPMENT

5.1 SAR Measurement Setup

Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. Which is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, measurement server, H/P computer, nearfield probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 5.1).

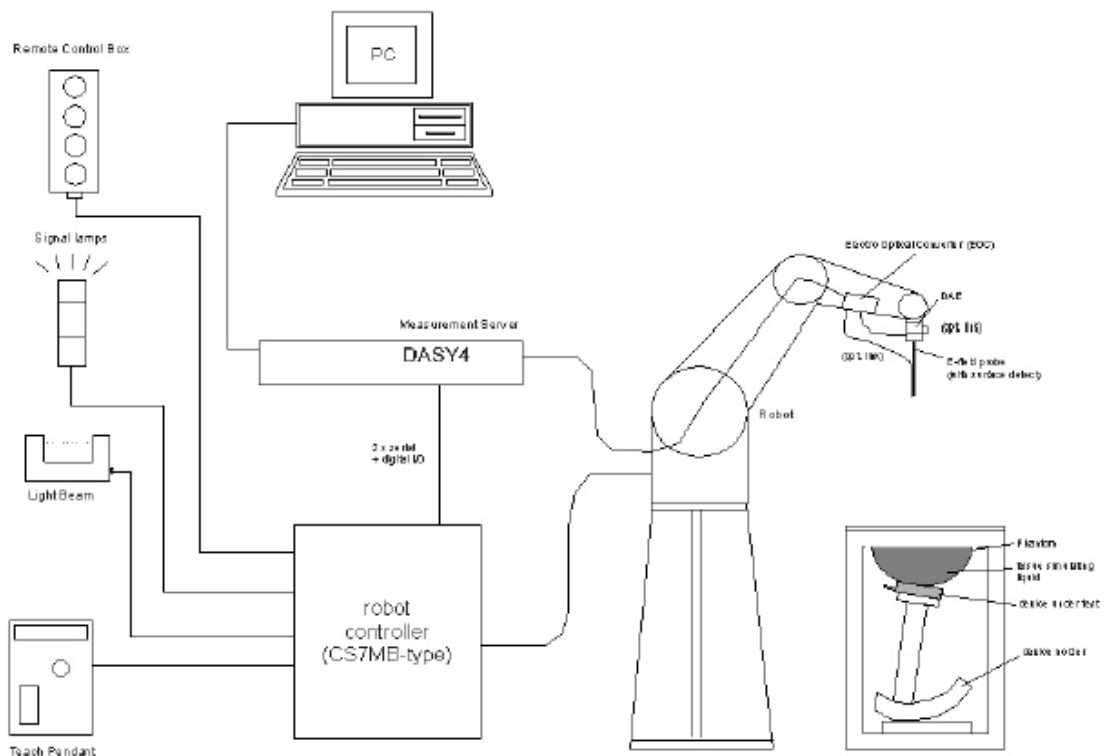


Figure 5.1 SAR Measurement System Setup

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control is used to drive the robot motors. The PC consists of the H/P computer with Windows XP system and SAR Measurement Software DASY4, LCD monitor, mouse and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A Data Acquisition Electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. Is connected to the Electro-Optical Coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the measurement server.

System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with autozeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

5.2 E-field Probe

The SAR measurement were conducted with the dosimetric probe designed in the classical triangular configuration (see Fig.5.3) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip (see Fig.5.4). It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches a System maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Fig.5.2). The approach is stopped at reaching the maximum.



Figure 5.2 DAE System




Figure 5.3 Triangular Probe Configuration



Figure 5.4 Probe Thick-Film Technique

Probe Specifications

Manufacturer : SPEAG
model name: EX3DV4
Serial number : 3910
Probe spec : refer to the Appendix C
Probe calibration : Aug 14, 2020

5.3 SAM Phantom

The SAM Twin Phantom V4.0C is constructed of a fiberglass shell Integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.



Phantom Specification

Construction : The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEC/IEEE 62209-1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Shell Thickness : 2 ± 0.2 mm
Filling Volume : Approx. 25 liters
Dimensions : Height; 830 mm; Length: 1000 mm; Width: 500 mm


5.4 Simulating Mixture Characterization

The dielectric properties of the liquid material used in the phantom shall be those listed in Table 5.1. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Table 5.1 Composition of the Head Tissue Equivalent Matter

INGREDIENTS	SIMULATING TISSUE
	2450 MHz Head
De-ionised water	56.23 %
Oxyethylated Sorbitan Mono Laurate	43.67 %
Ethylidihydro	0.1 %
Sum	100 %

INGREDIENTS	SIMULATING TISSUE
	5000 to 5800 MHz Head
De-ionised water	65.53 %
Diethylenglycol monohexylether	17.24 %
Triton X-100	17.24 %
Sum	100 %

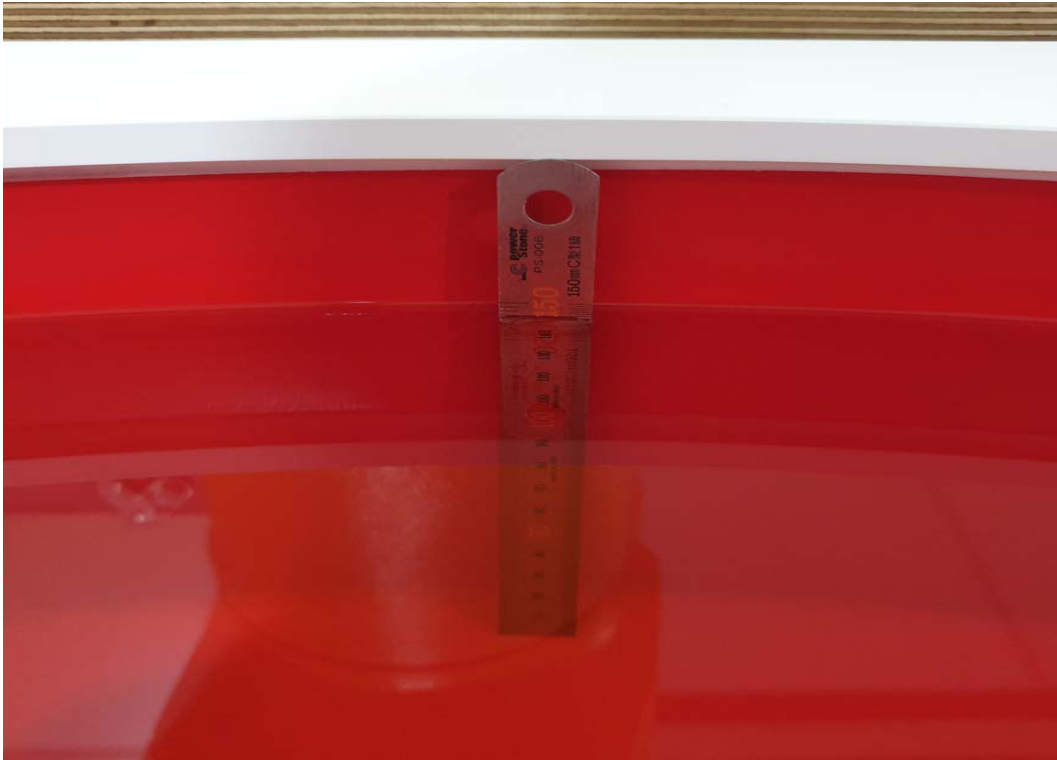

2 GHz (Head) Tissue Simulating Liquid, Depth: 150 mm



5 GHz (Head) Tissue Simulating Liquid, Depth: 150 mm

5.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening.

The device holder can be locked at different phantom locations (left head, right head, flat phantom).

- * Note: A simulating human hand is not used due to the Complex anatomical and geometrical structure of the hand that may produce infinite number of configurations .
To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



6. SAR MEASUREMENT PROCEDURE

EUT at the maximum power level is placed by a non metallic device holder in the above described positions at a shell phantom of a human being.

The distribution of the electric field strength E is measured in the tissue simulating liquid within the shell phantom. For this miniaturized field probes with high sensitivity and low field disturbance are used. Afterwards the corresponding SAR values are calculated with the known electrical conductivity σ and the mass density ρ of the tissue in the SEMCAD software.

The software is able to determine the averaged SAR values (averaging region 1g or 10g) for compliance testing. The measurements are done by two scans: first a coarse scan determines the region of the maximum SAR, afterwards the averaged SAR is measured in a second scan within the sharp of a cube. The measurement times takes about 20 minutes.

The following steps are used for each test position:

STEP 1

Establish a call with the maximum output power with a base station simulator.

The connection between the mobile phone and the base station simulator is established via air interface.

STEP 2

Measurement of the local E-Field value at a fixed location (P1).

This value serves as a reference value for calculating a possible power drift.

STEP 3

Measurement of the SAR distribution with a grid spacing of 15mm × 15mm and a constant distance to the inner surface of the phantom.

Since the sensors can not directly measure at the inner surface of the phantom.

Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With this values the area of the maximum SAR is calculated by a interpolation scheme (combination of a least-square fitted function and a weighted average method). Additional peaks within 3dB of the maximum SAR are searched.

STEP 4

Around this points, a cube of 30mm×30mm×30mm is assessed by measuring 5×5×5 points.

With these data, the peak spatial-average SAR value can be calculated with the SEMCAD software.

STEP 5

The used extrapolation and interpolation routines are all based on the modified Quadratic Shepard's method [DASY4].

STEP 6

Repetition of the E-Field measurement at the fixed location(P1) and repetition of the whole procedure if the two results differ by more than ±0.223dB.

7. LIMITS FOR SPECIFIC ABSORPTION RATE (SAR)

HUMAN EXPOSURE	SAR (W/kg)	
	General Population / Uncontrolled Exposure Environment	Occupational / Controlled Exposure Environment
Spatial Peak SAR (Brain)	1.6	8.0
Spatial Average SAR (Whole Body)	0.08	0.4
Spatial Peak SAR (Hands, Wrists, Feet and Ankles)	4.0	20.0

1. This limits accord to SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6
2. The Spatial Peak value of the SAR averaged over any 1g of tissue and over the appropriate averaging time.
3. The Spatial average value of the SAR averaged over the whole body.
4. The Spatial Peak value of the SAR averaged over any 10g of tissue and over the appropriate averaging time.

8. MEASUREMENT UNCERTAINTY


Per KDB 865664 D01 SAR measurement 100MHz to 6GHz clause 2.8.2, SAR measurement uncertainty analysis is required in SAR report only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR and ≥ 3.75 W/kg for 10-g SAR. The expanded SAR measurement uncertainty must be ≤ 30 %, for confidence interval of $k = 2$.

For this device, the highest measured 1-g SAR is less 1.5 W/kg and 10-g SAR is less 3.75 W/kg. Therefore, the measurement uncertainty table is not required in this report.

9. OUTPUT POWER MEASUREMENT

9.1 Measurement procedure for Output Power

EUTs average output power was measured at low, middle, high channels with a Spectrum Analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

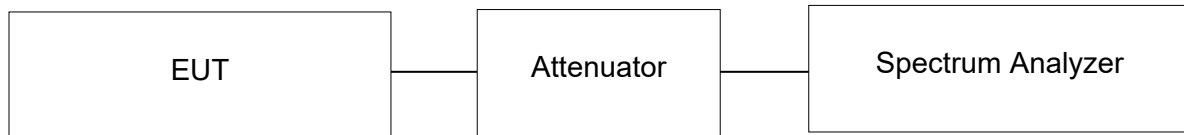

Power measurement Test Setup

9.2 Conducted RF Output Power (Unit: dBm)

DTS Band

Mode	Measured Frequency (MHz)	SISO/MIMO	Datarate	Measured Output Power (dBm)	
				ANT 0 (Aux)	ANT 1 (Main)
802.11b	2412	SISO	1	13.57	13.32
			2	13.43	13.20
			5.5	13.40	13.17
			11	13.44	13.21
		MIMO	1	16.43	
			2	16.40	
			5.5	16.29	
			11	16.24	
	2437	SISO	1	14.54	14.31
			2	14.44	14.34
			5.5	14.27	14.13
			11	14.43	14.35
		MIMO	1	17.63	
			2	17.69	
			5.5	17.42	
			11	17.47	
	2462	SISO	1	14.99	15.05
			2	15.13	15.02
			5.5	14.75	15.08
			11	14.95	15.03
		MIMO	1	18.20	
			2	18.29	
			5.5	18.07	
			11	18.24	
	2467	SISO	1	14.39	14.36
			2	14.60	14.32
			5.5	14.18	14.33
			11	14.40	14.35
MIMO		1	17.57		
		2	17.73		
		5.5	17.47		
		11	17.53		
2472	SISO	1	14.49	14.29	
		2	14.43	14.17	
		5.5	14.31	14.26	
		11	14.51	14.18	
	MIMO	1	17.63		
		2	17.63		
		5.5	17.42		
		11	17.52		
802.11g	2412	SISO	6	13.88	13.69
			9	13.86	13.63
			12	13.81	13.68

802.11g	2412	SISO	18	13.75	13.60
			24	13.58	13.57
			36	13.62	13.52
			48	11.90	11.50
			54	11.96	11.53
802.11g	2412	MIMO	6	16.82	
			9	16.82	
			12	16.80	
			18	16.76	
			24	16.63	
			36	16.58	
			48	14.47	
			54	14.43	
	2437	SISO	6	14.29	14.09
			9	14.21	14.16
			12	14.19	14.10
			18	14.43	14.43
			24	14.20	14.08
			36	14.40	14.40
			48	12.22	12.31
			54	12.38	12.22
		MIMO	6	17.22	
			9	17.29	
			12	17.35	
			18	17.67	
			24	17.36	
			36	17.66	
			48	15.41	
			54	15.45	
	2462	SISO	6	13.74	13.66
			9	13.75	13.65
			12	13.70	13.70
			18	13.69	13.62
24			13.58	13.53	
36			13.58	13.45	
48			11.34	11.28	
54			11.31	11.28	
MIMO		6	16.61		
		9	16.66		
		12	16.64		
		18	16.56		
		24	16.59		
		36	16.56		
		48	14.43		
		54	14.39		
2467	SISO	6	14.16	14.51	
		9	14.15	14.39	
		12	14.35	14.44	
		18	14.38	14.33	
		24	14.26	14.38	

802.11g	2467	SISO	36	14.06	14.16
			48	12.27	12.24
			54	12.43	12.38
802.11g	2467	MIMO	6	17.41	
			9	17.50	
			12	17.50	
			18	17.48	
			24	17.42	
			36	17.55	
			48	15.53	
			54	15.73	
	2472	SISO	6	12.12	12.10
			9	12.23	12.09
			12	12.22	12.14
			18	12.41	12.06
			24	12.20	12.01
			36	12.59	11.95
			48	9.96	9.86
			54	10.14	9.94
		MIMO	6	15.37	
			9	15.23	
			12	15.39	
			18	15.47	
			24	15.36	
			36	15.46	
			48	13.13	
			54	13.10	
802.11n (20 MHz)	2412	SISO	MCS0	13.34	13.35
			MCS1	13.40	13.36
			MCS2	13.32	13.35
			MCS3	13.31	13.26
			MCS4	13.35	13.23
			MCS5	13.23	13.19
			MCS6	11.03	11.08
			MCS7	11.07	11.07
		MIMO	MCS0	16.31	
			MCS1	16.30	
			MCS2	16.29	
			MCS3	16.21	
			MCS4	16.17	
			MCS5	16.22	
	MCS6		14.04		
	MCS7		14.02		
	MCS8		16.35		
	MCS9		16.33		
	MCS10		16.29		
	MCS11		16.26		
	MCS12		16.20		
	MCS13		16.19		
	MCS14	14.06			

802.11n	2412	MIMO	MCS15	14.00	
802.11n (20 MHz)	2437	SISO	MCS0	14.74	14.70
			MCS1	14.77	14.84
			MCS2	14.74	14.53
			MCS3	14.76	14.66
			MCS4	14.87	14.66
			MCS5	14.75	14.82
			MCS6	12.63	12.64
		MCS7	12.65	12.67	
		MIMO	MCS0	17.94	
			MCS1	18.04	
			MCS2	17.81	
			MCS3	17.84	
			MCS4	18.00	
			MCS5	17.90	
	MCS6		15.77		
	MCS7		15.64		
	MCS8		17.79		
	MCS9		17.93		
	MCS10		17.91		
	MCS11		17.83		
	MCS12		17.92		
	MCS13	17.85			
	MCS14	15.92			
	MCS15	15.73			
	2462	SISO	MCS0	14.62	14.57
			MCS1	14.86	14.35
			MCS2	14.62	14.45
			MCS3	14.53	14.43
			MCS4	14.77	14.26
			MCS5	14.85	14.26
MCS6			12.68	13.00	
MCS7		12.71	12.69		
MIMO		MCS0	17.92		
		MCS1	17.83		
		MCS2	17.79		
		MCS3	17.61		
		MCS4	17.63		
		MCS5	17.77		
		MCS6	15.92		
		MCS7	15.90		
	MCS8	17.83			
MCS9	17.88				
MCS10	17.88				
MCS11	17.70				
MCS12	17.67				
MCS13	17.59				
MCS14	15.71				
MCS15	15.66				

Mode	Measured Frequency (MHz)	SISO/MIMO	Datarate	Measured Output Power (dBm)		
				ANT 0 (Aux)	ANT 1 (Main)	
802.11n (20 MHz)	2467	SISO	MCS0	14.26	14.27	
			MCS1	14.36	14.23	
			MCS2	14.17	14.14	
			MCS3	14.11	14.12	
			MCS4	14.30	14.07	
			MCS5	14.20	14.01	
			MCS6	12.30	12.34	
		MCS7	12.10	12.23		
		MIMO	MCS0	17.16		
			MCS1	17.39		
			MCS2	17.27		
			MCS3	17.25		
			MCS4	17.25		
			MCS5	17.38		
			MCS6	15.36		
	MCS7		15.36			
	MIMO	MCS8	17.25			
		MCS9	17.38			
		MCS10	17.33			
		MCS11	17.37			
		MCS12	17.39			
		MCS13	17.31			
		MCS14	15.34			
		MCS15	15.27			
		2472	SISO	MCS0	13.50	13.42
				MCS1	13.48	13.48
	MCS2			13.51	13.45	
	MCS3			13.54	13.44	
	MCS4			13.44	13.36	
	MCS5			13.42	13.37	
	MCS6			11.27	11.17	
MCS7	11.20		11.15			
MIMO	MCS0		16.47			
	MCS1		16.44			
	MCS2		16.50			
	MCS3		16.49			
	MCS4		16.41			
	MCS5		16.37			
	MCS6		14.19			
	MCS7		14.18			
	MCS8	16.46				
MIMO	MCS9	16.44				
	MCS10	16.39				
	MCS11	16.36				
	MCS12	16.34				
	MCS13	16.29				

802.11n (20 MHz)	2472	MIMO	MCS14	14.09	
			MCS15	14.04	
802.11n (40 MHz)	2422	SISO	MCS0	11.68	11.57
			MCS1	11.66	11.52
			MCS2	11.67	11.54
			MCS3	11.59	11.47
			MCS4	11.50	11.50
			MCS5	11.53	11.48
			MCS6	9.88	9.46
		MCS7	9.86	9.40	
		MIMO	MCS0	14.68	
			MCS1	14.67	
			MCS2	14.67	
			MCS3	14.64	
			MCS4	14.54	
			MCS5	14.50	
	MCS6		12.34		
	MCS7		12.33		
	MCS8		14.59		
	MCS9		14.54		
	MCS10	14.59			
	MCS11	14.59			
	MCS12	14.56			
	MCS13	14.51			
	MCS14	12.39			
	MCS15	12.38			
	2437	SISO	MCS0	18.57	18.74
			MCS1	18.80	18.73
			MCS2	18.67	18.84
MCS3			18.63	18.70	
MCS4			18.85	18.66	
MCS5			18.79	18.71	
MCS6			16.92	16.69	
MCS7		16.92	16.70		
MIMO		MCS0	21.79		
		MCS1	21.97		
		MCS2	21.86		
		MCS3	21.82		
		MCS4	21.91		
	MCS5	21.89			
MCS6	19.95				
MCS7	19.97				
MCS8	21.95				
MCS9	21.95				
MCS10	21.90				
MCS11	21.89				
MCS12	21.73				
MCS13	21.74				
MCS14	19.91				
MCS15	19.98				

Mode	Measured Frequency (MHz)	SISO/MIMO	Datarate	Measured Output Power (dBm)	
				ANT 0 (Aux)	ANT 1 (Main)
802.11n (40 MHz)	2452	SISO	MCS0	15.15	14.98
			MCS1	15.07	15.02
			MCS2	15.09	14.97
			MCS3	15.14	14.94
			MCS4	15.13	14.96
			MCS5	15.03	14.99
			MCS6	14.10	13.02
		MCS7	14.02	13.02	
		MIMO	MCS0	17.98	
			MCS1	17.95	
			MCS2	17.95	
			MCS3	17.95	
			MCS4	17.88	
			MCS5	17.83	
			MCS6	15.65	
			MCS7	15.67	
			MCS8	17.89	
			MCS9	17.82	
			MCS10	17.84	
			MCS11	17.82	
			MCS12	17.76	
			MCS13	17.73	
			MCS14	15.55	
MCS15	15.57				

U-NII-1 Band

Mode	Measured Frequency (MHz)	SISO/MIMO	Datarate	Measured Output Power (dBm)	
				ANT 0 (Aux)	ANT 1 (Main)
802.11a	5180	SISO	6	13.23	11.80
			9	13.27	11.85
			12	13.27	11.96
			18	13.47	11.90
			24	13.41	11.85
			36	13.27	11.73
			48	11.27	9.65
			54	11.26	9.63
		MIMO	6	15.79	
			9	15.86	
			12	15.87	
			18	15.89	
			24	15.99	
			36	15.83	
	5200	SISO	6	12.05	11.95
			9	12.16	11.94
			12	12.18	11.97
			18	12.07	11.90
			24	11.97	11.82
			36	12.04	11.88
			48	10.08	9.75
			54	10.07	9.73
		MIMO	6	14.99	
			9	14.96	
			12	14.99	
			18	14.92	
			24	14.92	
			36	14.86	
	5240	SISO	6	9.53	9.43
			9	9.46	9.35
12			9.48	9.40	
18			9.51	9.33	
24			9.46	9.44	
36			9.36	9.30	
48			7.37	7.29	
54			7.24	7.25	
MIMO		6	12.49		
		9	12.51		
		12	12.49		
		18	12.44		
		24	12.37		

802.11a	5240	MIMO	36	12.41	
			48	10.26	
			54	10.22	
802.11n (20 MHz)	5180	SISO	MCS0	13.70	12.90
			MCS1	13.54	12.82
			MCS2	13.65	12.82
			MCS3	13.74	12.62
			MCS4	13.72	12.41
			MCS5	13.69	12.31
			MCS6	11.66	10.13
		MCS7	11.72	10.13	
		MIMO	MCS0	16.21	
			MCS1	16.11	
			MCS2	16.23	
			MCS3	16.22	
			MCS4	16.21	
			MCS5	16.14	
			MCS6	14.12	
	MCS7		14.20		
	MCS8		15.73		
	MCS9		15.74		
	MCS10		15.74		
	MCS11		15.74		
	MCS12		15.54		
	MCS13		15.44		
	MCS14	13.20			
	MCS15	13.19			
	5200	SISO	MCS0	12.85	12.74
			MCS1	12.81	12.70
			MCS2	12.84	12.77
			MCS3	12.76	12.65
			MCS4	12.76	12.63
			MCS5	12.63	12.54
			MCS6	10.53	10.36
MCS7		10.52	10.41		
MIMO		MCS0	15.72		
		MCS1	15.71		
		MCS2	15.75		
		MCS3	15.65		
		MCS4	15.66		
		MCS5	15.60		
		MCS6	13.43		
		MCS7	13.40		
	MCS8	15.68			
	MCS9	15.63			
	MCS10	15.64			
	MCS11	15.64			
	MCS12	15.57			
	MCS13	15.58			
	MCS14	13.41			

802.11n	5200	MIMO	MCS15	13.40	
802.11n (20 MHz)	5240	SISO	MCS0	10.85	10.77
			MCS1	10.76	10.64
			MCS2	10.80	10.60
			MCS3	10.81	10.66
			MCS4	10.67	10.53
			MCS5	10.53	10.56
			MCS6	8.36	8.50
			MCS7	8.34	8.44
		MIMO	MCS0	13.76	
			MCS1	13.74	
			MCS2	13.69	
			MCS3	13.69	
			MCS4	13.58	
			MCS5	13.58	
			MCS6	11.44	
			MCS7	11.41	
			MCS8	13.69	
			MCS9	13.65	
			MCS10	13.65	
			MCS11	13.62	
MCS12	13.60				
MCS13	13.55				
MCS14	11.41				
MCS15	11.37				
802.11ac (20 MHz)	5180	SISO	MCS0	11.49	10.02
			MCS1	11.59	10.14
			MCS2	11.66	10.19
			MCS3	11.65	10.18
			MCS4	11.81	10.23
			MCS5	11.65	10.05
			MCS6	11.75	10.18
			MCS7	9.73	8.08
			MCS8	8.56	6.97
		MIMO (CDD)	MCS0	14.10	
			MCS1	14.12	
			MCS2	14.19	
			MCS3	14.26	
			MCS4	14.20	
			MCS5	14.09	
			MCS6	14.14	
			MCS7	12.15	
			MCS8	11.01	
		MIMO (SDM)	MCS0	13.84	
			MCS1	14.06	
			MCS2	14.05	
			MCS3	13.96	
			MCS4	13.93	
			MCS5	13.87	
			MCS6	13.86	

802.11ac (20 MHz)	5180	MIMO (SDM)	MCS7	11.86	
			MCS8	10.77	
802.11ac (20 MHz)	5200	SISO	MCS0	11.59	11.48
			MCS1	11.48	11.54
			MCS2	11.53	11.50
			MCS3	11.50	11.43
			MCS4	11.53	11.36
			MCS5	11.47	11.34
			MCS6	11.42	11.42
			MCS7	9.32	9.26
		MCS8	9.29	9.25	
		MIMO (CDD)	MCS0	14.61	
			MCS1	14.56	
			MCS2	14.60	
			MCS3	14.58	
			MCS4	14.52	
			MCS5	14.46	
			MCS6	14.45	
	MCS7		12.33		
	MCS8	12.29			
	MIMO (SDM)	MCS0	14.58		
		MCS1	14.60		
		MCS2	14.52		
		MCS3	14.46		
		MCS4	14.52		
		MCS5	14.43		
		MCS6	14.40		
		MCS7	12.32		
	MCS8	12.25			
	5240	SISO	MCS0	10.63	9.58
			MCS1	10.61	9.54
			MCS2	10.60	9.56
			MCS3	10.62	9.55
			MCS4	10.51	9.51
MCS5			10.47	9.48	
MCS6			10.45	9.44	
MCS7			8.26	7.31	
MCS8		8.27	7.26		
MIMO (CDD)		MCS0	13.12		
		MCS1	13.13		
		MCS2	13.09		
		MCS3	13.07		
		MCS4	13.03		
		MCS5	13.02		
		MCS6	13.01		
	MCS7	10.83			
MCS8	10.80				
MIMO (SDM)	MCS0	13.06			
	MCS1	13.07			
	MCS2	13.07			

802.11ac (20 MHz)	5240	MIMO (SDM)	MCS3	12.99	
			MCS4	12.92	
			MCS5	12.87	
			MCS6	12.91	
			MCS7	10.77	
			MCS8	10.75	
802.11n (40 MHz)	5190	SISO	MCS0	9.74	9.66
			MCS1	9.72	9.67
			MCS2	9.70	9.65
			MCS3	9.68	9.60
			MCS4	9.65	9.57
			MCS5	9.60	9.61
			MCS6	7.45	7.55
		MCS7	7.42	7.40	
		MIMO	MCS0	12.72	
			MCS1	12.68	
			MCS2	12.66	
			MCS3	12.69	
			MCS4	12.63	
			MCS5	12.58	
	MCS6		10.41		
	MCS7		10.38		
	MCS8		12.70		
	MCS9		12.69		
	MCS10		12.67		
	MCS11		12.64		
	MCS12		12.64		
	5230	SISO	MCS0	13.95	12.14
			MCS1	13.83	12.12
			MCS2	13.87	12.26
			MCS3	13.76	12.16
			MCS4	13.83	11.99
			MCS5	13.74	12.06
			MCS6	11.64	9.93
		MCS7	11.67	9.95	
		MIMO	MCS0	16.32	
MCS1			16.27		
MCS2			16.24		
MCS3			16.22		
MCS4			16.12		
MCS5			16.07		
MCS6			14.08		
MCS7			14.05		
MCS8	15.20				
MCS9	16.08				
MCS10	16.09				
MCS11	16.00				

802.11n (40 MHz)	5230	MIMO	MCS12	15.97	
			MCS13	15.89	
			MCS14	14.66	
			MCS15	13.87	
802.11ac (40 MHz)	5190	SISO	MCS0	7.89	7.21
			MCS1	7.84	7.17
			MCS2	7.86	7.10
			MCS3	7.83	7.01
			MCS4	7.80	7.13
			MCS5	7.77	6.98
			MCS6	7.81	6.86
			MCS7	7.74	6.75
			MCS8	5.54	4.70
		MCS9	5.53	4.56	
		MIMO (CDD)	MCS0	10.49	
			MCS1	10.50	
			MCS2	10.49	
			MCS3	10.48	
			MCS4	10.48	
			MCS5	10.40	
			MCS6	10.35	
			MCS7	10.29	
	MCS8		8.25		
	MIMO (SDM)	MCS0	10.51		
		MCS1	10.52		
		MCS2	10.38		
		MCS3	10.47		
		MCS4	10.38		
		MCS5	10.33		
		MCS6	10.26		
		MCS7	10.21		
		MCS8	8.08		
	MCS9	8.04			
	5230	SISO	MCS0	13.87	12.14
			MCS1	13.92	12.25
			MCS2	13.93	12.24
			MCS3	13.76	12.19
			MCS4	13.92	12.10
			MCS5	13.80	12.18
			MCS6	13.67	12.13
MCS7			11.70	10.01	
MCS8			10.65	8.90	
MCS9		10.64	8.90		
MIMO (CDD)		MCS0	16.31		
		MCS1	16.16		
		MCS2	16.13		
		MCS3	16.21		
		MCS4	16.20		
		MCS5	16.06		

802.11ac (40 MHz)	5230	MIMO (CDD)	MCS6	16.14	
			MCS7	14.01	
			MCS8	12.89	
			MCS9	12.91	
802.11ac (40 MHz)	5230	MIMO (SDM)	MCS0	16.03	
			MCS1	16.10	
			MCS2	16.09	
			MCS3	16.03	
			MCS4	15.98	
			MCS5	15.93	
			MCS6	15.85	
			MCS7	13.92	
			MCS8	12.70	
802.11ac (80 MHz)	5210	SISO	MCS0	10.31	8.62
			MCS1	10.24	8.63
			MCS2	10.22	8.69
			MCS3	10.29	8.54
			MCS4	10.29	8.60
			MCS5	10.23	8.62
			MCS6	10.14	8.44
			MCS7	8.10	6.48
			MCS8	7.10	5.17
		MCS9	7.02	5.19	
		MIMO (CDD)	MCS0	12.66	
			MCS1	12.61	
			MCS2	12.72	
			MCS3	12.71	
			MCS4	12.52	
			MCS5	12.49	
			MCS6	12.52	
			MCS7	10.40	
			MCS8	9.43	
		MCS9	9.36		
		MIMO (SDM)	MCS0	12.24	
			MCS1	12.19	
			MCS2	12.17	
			MCS3	12.14	
			MCS4	12.14	
			MCS5	12.17	
			MCS6	12.10	
MCS7	10.06				
MCS8	9.02				
MCS9	9.02				

U-NII-2A Band

Mode	Measured Frequency (MHz)	SISO/ MIMO	Datarate	Measured Output Power (dBm)	
				ANT 0 (Aux)	ANT 1 (Main)
802.11a	5260	SISO	6	7.06	6.09
			9	7.05	6.15
			12	7.10	6.11
			18	7.08	6.14
			24	7.03	6.07
			36	7.01	6.09
			48	5.31	4.19
			54	5.22	4.22
		MIMO	6	9.67	
			9	9.68	
			12	9.67	
			18	9.67	
			24	9.58	
			36	9.57	
	5300	SISO	6	8.59	7.44
			9	8.56	7.40
			12	8.55	7.48
			18	8.56	7.44
			24	8.57	7.38
			36	8.44	7.37
			48	6.48	5.26
			54	6.47	5.25
		MIMO	6	11.02	
			9	11.00	
			12	10.99	
			18	10.96	
			24	10.95	
			36	10.91	
	5320	SISO	6	9.46	8.25
			9	9.54	8.21
			12	9.55	8.38
			18	9.50	8.37
			24	9.46	8.09
			36	9.43	6.01
			48	7.32	6.00
			54	7.27	5.92
MIMO		6	11.98		
		9	12.02		
		12	12.05		
		18	12.11		
		24	12.07		

802.11a	5320	MIMO	36	12.03	
			48	9.88	
			54	9.75	
802.11n (20 MHz)	5260	SISO	MCS0	8.35	8.29
			MCS1	8.28	8.26
			MCS2	8.20	8.23
			MCS3	8.25	8.30
			MCS4	8.18	8.14
			MCS5	8.09	8.07
			MCS6	6.08	6.03
			MCS7	6.00	6.06
		MIMO	MCS0	11.35	
			MCS1	11.33	
			MCS2	11.28	
			MCS3	11.29	
			MCS4	11.22	
			MCS5	11.16	
			MCS6	9.16	
	MCS7		9.06		
	MCS8		11.36		
	MCS9		11.34		
	MCS10		11.31		
	MCS11		11.25		
	MCS12		11.22		
	MCS13		11.14		
	MCS14		9.13		
	MCS15		9.06		
	5300		SISO	MCS0	8.85
		MCS1		8.83	8.79
		MCS2		8.84	8.80
		MCS3		8.77	8.72
		MCS4		8.73	8.70
		MCS5		8.66	8.67
		MCS6		6.50	7.44
MCS7		6.48		7.45	
MIMO		MCS0	11.79		
		MCS1	11.76		
		MCS2	11.79		
		MCS3	11.77		
		MCS4	11.75		
		MCS5	11.72		
		MCS6	10.51		
		MCS7	10.50		
MIMO	MCS8	11.77			
	MCS9	11.75			
	MCS10	11.72			
	MCS11	11.70			
	MCS12	11.68			
	MCS13	11.66			
	MCS14	9.55			

802.11n	5300	MIMO	MCS15	9.52	
802.11n (20 MHz)	5320	SISO	MCS0	10.69	9.63
			MCS1	10.71	9.46
			MCS2	10.85	9.72
			MCS3	10.83	9.73
			MCS4	10.72	9.71
			MCS5	10.75	9.64
			MCS6	8.67	7.41
		MCS7	8.63	7.48	
		MIMO	MCS0	13.40	
			MCS1	13.34	
			MCS2	13.45	
			MCS3	13.44	
			MCS4	13.40	
			MCS5	13.37	
			MCS6	11.28	
			MCS7	11.25	
			MCS8	13.25	
			MCS9	13.37	
			MCS10	13.35	
			MCS11	13.33	
MCS12	13.29				
MCS13	13.14				
MCS14	11.08				
MCS15	11.05				
802.11ac (20 MHz)	5260	SISO	MCS0	9.63	8.66
			MCS1	9.57	8.61
			MCS2	9.51	8.56
			MCS3	9.54	8.51
			MCS4	9.46	8.48
			MCS5	9.44	8.45
			MCS6	9.40	8.42
			MCS7	7.31	6.28
		MCS8	7.25	6.25	
		MIMO (CDD)	MCS0	12.13	
			MCS1	12.13	
			MCS2	12.08	
			MCS3	12.10	
			MCS4	12.03	
			MCS5	11.98	
			MCS6	11.98	
			MCS7	9.79	
		MCS8	9.74		
		MIMO (SDM)	MCS0	12.09	
			MCS1	12.11	
			MCS2	12.06	
			MCS3	12.01	
			MCS4	12.01	
			MCS5	11.96	
		MCS6	11.93		

802.11ac (20 MHz)	5260	MIMO (SDM)	MCS7	9.78	
			MCS8	9.78	
802.11ac (20 MHz)	5300	SISO	MCS0	13.07	11.72
			MCS1	12.91	11.65
			MCS2	13.05	11.75
			MCS3	12.95	11.80
			MCS4	13.00	11.86
			MCS5	13.00	11.73
			MCS6	13.08	9.54
			MCS7	10.96	9.64
		MCS8	9.94	9.60	
		MIMO (CDD)	MCS0	15.74	
			MCS1	15.72	
			MCS2	15.76	
			MCS3	15.76	
			MCS4	15.77	
			MCS5	15.67	
			MCS6	14.94	
	MCS7		13.68		
	MCS8	14.27			
	MIMO (SDM)	MCS0	15.72		
		MCS1	15.74		
		MCS2	15.66		
		MCS3	15.63		
		MCS4	15.57		
		MCS5	15.52		
		MCS6	15.48		
		MCS7	13.46		
	MCS8	12.85			
	5320	SISO	MCS0	13.07	12.06
MCS1			13.10	12.12	
MCS2			13.14	12.08	
MCS3			13.11	12.01	
MCS4			13.09	11.95	
MCS5			13.07	11.96	
MCS6			13.05	11.85	
MCS7			11.01	9.79	
MCS8		10.97	9.77		
MIMO (CDD)		MCS0	15.61		
		MCS1	15.59		
		MCS2	15.53		
	MCS3	15.56			
MIMO (SDM)	MCS4	15.48			
	MCS5	15.47			
	MCS6	15.46			
	MCS7	13.41			
MCS8	13.35				
MCS0	15.63				
MCS1	15.61				
MCS2	15.60				

802.11ac (20 MHz)	5320	MIMO (SDM)	MCS3	15.59	
			MCS4	15.58	
			MCS5	15.49	
			MCS6	15.44	
			MCS7	13.35	
			MCS8	13.33	
802.11n (40 MHz)	5270	SISO	MCS0	11.70	10.55
			MCS1	11.66	10.53
			MCS2	11.77	10.53
			MCS3	11.75	10.39
			MCS4	11.80	10.45
			MCS5	11.67	10.33
			MCS6	9.73	8.41
		MCS7	9.80	8.22	
		MIMO	MCS0	14.33	
			MCS1	14.34	
			MCS2	14.41	
			MCS3	14.40	
			MCS4	14.34	
			MCS5	14.25	
	MCS6		12.21		
	MCS7		12.27		
	MCS8		14.24		
	MCS9		14.34		
	MCS10		14.31		
	MCS11		14.25		
	MCS12		14.16		
	5310	SISO	MCS0	11.03	10.98
			MCS1	10.95	10.96
			MCS2	10.94	10.88
			MCS3	10.98	10.86
			MCS4	10.90	10.80
			MCS5	10.84	10.77
			MCS6	8.67	8.57
		MCS7	8.70	8.55	
		MIMO	MCS0	13.98	
MCS1			13.97		
MCS2			13.94		
MCS3			13.92		
MCS4			13.88		
MCS5			13.80		
MCS6			11.74		
MCS7			11.71		
MCS8	13.98				
MCS9	13.94				
MCS10	13.95				
MCS11	13.94				

802.11n (40 MHz)	5310	MIMO	MCS12	13.92	
			MCS13	13.91	
			MCS14	11.78	
			MCS15	11.79	
802.11ac (40 MHz)	5270	SISO	MCS0	13.71	12.69
			MCS1	13.65	12.62
			MCS2	13.77	12.64
			MCS3	13.74	12.55
			MCS4	13.83	12.50
			MCS5	13.67	12.48
			MCS6	13.76	12.51
			MCS7	11.77	10.40
			MCS8	10.70	9.20
		MCS9	10.71	9.23	
		MIMO (CDD)	MCS0	16.40	
			MCS1	16.48	
			MCS2	16.43	
			MCS3	16.35	
			MCS4	16.33	
			MCS5	16.27	
			MCS6	16.25	
			MCS7	14.18	
	MCS8		13.02		
	MIMO (SDM)	MCS0	16.19		
		MCS1	16.33		
		MCS2	16.29		
		MCS3	16.34		
		MCS4	16.21		
		MCS5	16.22		
		MCS6	16.13		
		MCS7	14.13		
		MCS8	13.05		
	MCS9	13.05			
	5310	SISO	MCS0	11.79	11.21
			MCS1	11.71	11.18
			MCS2	11.82	11.14
			MCS3	11.65	11.06
			MCS4	11.70	11.09
			MCS5	11.64	10.97
			MCS6	11.53	10.96
MCS7			11.47	10.90	
MCS8			9.35	8.88	
MCS9		9.32	8.74		
MIMO (CDD)		MCS0	14.48		
		MCS1	14.42		
		MCS2	14.41		
		MCS3	14.41		
		MCS4	14.30		
		MCS5	14.23		

802.11ac (40 MHz)	5310	MIMO (CDD)	MCS6	14.19	
			MCS7	14.14	
			MCS8	12.23	
			MCS9	12.20	
802.11ac (40 MHz)	5310	MIMO (SDM)	MCS0	14.44	
			MCS1	14.42	
			MCS2	14.44	
			MCS3	14.42	
			MCS4	14.32	
			MCS5	14.25	
			MCS6	14.24	
			MCS7	14.19	
			MCS8	12.17	
802.11ac (80 MHz)	5290	SISO	MCS0	11.24	9.88
			MCS1	11.03	9.83
			MCS2	10.99	9.77
			MCS3	11.02	9.80
			MCS4	10.98	9.79
			MCS5	11.05	9.62
			MCS6	11.01	9.61
			MCS7	8.97	7.61
			MCS8	7.85	6.44
		MIMO (CDD)	MCS0	13.72	
			MCS1	13.67	
			MCS2	13.59	
			MCS3	13.60	
			MCS4	13.51	
			MCS5	13.45	
			MCS6	13.46	
			MCS7	11.32	
			MCS8	10.28	
		MIMO (SDM)	MCS0	13.60	
			MCS1	13.58	
			MCS2	13.55	
			MCS3	13.49	
			MCS4	13.51	
			MCS5	13.55	
			MCS6	13.44	
			MCS7	11.36	
			MCS8	10.18	
MCS9	10.16				

U-NII-2C Band

Mode	Measured Frequency(MHz)	SISO/MIMO	Datarate	Measured Output Power (dBm)	
				ANT 0 (Aux)	ANT 1 (Main)
802.11a	5500	SISO	6	12.45	11.59
			9	12.46	11.56
			12	12.40	11.57
			18	12.43	11.57
			24	12.36	11.50
			36	12.38	11.43
			48	10.29	9.40
			54	10.21	9.43
		MIMO	6	15.02	
			9	15.01	
			12	15.02	
			18	14.98	
			24	14.92	
			36	14.88	
	5580	SISO	6	14.38	13.19
			9	14.36	13.36
			12	14.35	13.36
			18	14.34	13.30
			24	14.33	13.42
			36	14.48	13.43
			48	12.40	11.21
			54	12.27	11.25
		MIMO	6	16.92	
			9	17.05	
			12	17.04	
			18	17.16	
			24	17.11	
			36	17.15	
5720	SISO	6	14.88	13.77	
		9	14.83	13.76	
		12	14.75	13.79	
		18	14.78	13.63	
		24	14.79	13.58	
		36	14.62	13.48	
		48	12.45	11.31	
		54	12.36	11.24	
	MIMO	6	17.29		
		9	17.25		
		12	17.20		
		18	17.20		
		24	17.15		
		36	17.09		
48	14.89				

802.11a	5720	MIMO	54	14.88	
802.11n (20 MHz)	5500	SISO	MCS0	13.25	13.22
			MCS1	13.23	13.17
			MCS2	13.21	13.20
			MCS3	13.25	13.25
			MCS4	13.18	13.21
			MCS5	13.09	13.15
			MCS6	11.10	11.09
		MCS7	11.07	11.05	
		MIMO	MCS0	16.22	
			MCS1	16.16	
			MCS2	16.14	
			MCS3	16.18	
			MCS4	16.13	
			MCS5	16.09	
			MCS6	13.97	
	MCS7		13.95		
	MCS8		16.20		
	MCS9		16.14		
	MCS10		16.15		
	MCS11	16.17			
	MCS12	16.07			
	MCS13	16.04			
	MCS14	13.97			
	MCS15	13.91			
	5580	SISO	MCS0	14.18	12.81
			MCS1	14.15	12.78
			MCS2	14.21	13.08
			MCS3	14.35	13.03
MCS4			14.52	13.22	
MCS5			14.41	13.18	
MCS6			12.36	10.99	
MCS7		12.20	11.04		
MIMO		MCS0	16.74		
		MCS1	16.78		
		MCS2	16.90		
		MCS3	16.89		
		MCS4	17.03		
	MCS5	16.96			
MCS6	14.84				
MCS7	14.85				
MCS8	16.67				
MCS9	16.80				
MCS10	16.75				
MCS11	16.84				
MCS12	16.82				
MCS13	16.68				
MCS14	14.64				
MCS15	14.53				
802.11n	5720	SISO	MCS0	14.35	14.25

802.11n (20 MHz)	5720	SISO	MCS1	14.27	14.21
			MCS2	14.26	14.24
			MCS3	14.20	14.20
			MCS4	14.25	14.27
			MCS5	14.20	14.21
			MCS6	12.08	12.03
			MCS7	12.11	12.05
		MIMO	MCS0	17.26	
			MCS1	17.24	
			MCS2	17.22	
			MCS3	17.21	
			MCS4	17.21	
			MCS5	17.19	
			MCS6	16.21	
			MCS7	15.09	
			MCS8	16.27	
			MCS9	17.25	
			MCS10	17.24	
			MCS11	17.25	
			MCS12	17.24	
MCS13	17.15				
MCS14	15.08				
MCS15	15.07				
802.11ac (20 MHz)	5500	SISO	MCS0	14.30	13.25
			MCS1	14.20	13.27
			MCS2	14.27	13.20
			MCS3	14.25	13.24
			MCS4	14.21	13.20
			MCS5	14.18	13.17
			MCS6	14.07	13.04
			MCS7	12.11	11.15
		MCS8	12.09	11.09	
		MIMO (CDD)	MCS0	16.78	
			MCS1	16.79	
			MCS2	16.76	
			MCS3	16.76	
			MCS4	16.73	
			MCS5	16.68	
			MCS6	16.66	
			MCS7	14.57	
		MIMO (SDM)	MCS8	14.59	
			MCS0	16.76	
			MCS1	16.77	
			MCS2	16.74	
			MCS3	16.72	
			MCS4	16.74	
			MCS5	16.68	
			MCS6	16.66	
		MCS7	14.62		
		MCS8	14.61		

802.11ac (20 MHz)	5580	SISO	MCS0	14.32	13.09
			MCS1	14.07	12.81
			MCS2	14.27	13.00
			MCS3	14.21	13.10
			MCS4	14.43	13.25
			MCS5	14.22	13.10
			MCS6	14.30	13.18
			MCS7	12.21	10.97
		MCS8	11.00	9.78	
		MIMO (CDD)	MCS0	16.89	
			MCS1	16.75	
			MCS2	16.87	
			MCS3	16.92	
			MCS4	17.05	
			MCS5	16.98	
			MCS6	16.99	
			MCS7	14.84	
		MIMO (SDM)	MCS0	16.73	
			MCS1	16.79	
			MCS2	16.80	
			MCS3	16.72	
			MCS4	16.89	
			MCS5	16.75	
			MCS6	16.79	
	MCS7		14.67		
	MCS8	13.47			
	5720	SISO	MCS0	14.30	13.33
			MCS1	14.29	13.28
			MCS2	14.24	13.20
			MCS3	14.26	13.19
			MCS4	14.20	13.09
			MCS5	14.13	13.04
MCS6			14.05	13.10	
MCS7			12.03	11.05	
MCS8		11.98	11.01		
MIMO (CDD)		MCS0	16.84		
		MCS1	16.84		
		MCS2	16.79		
		MCS3	16.81		
		MCS4	16.75		
		MCS5	16.71		
		MCS6	16.70		
		MCS7	14.70		
MCS8		14.66			
MIMO (SDM)		MCS0	16.80		
		MCS1	16.77		
	MCS2	16.76			
	MCS3	16.73			
MCS4	16.73				

802.11ac (20 MHz)	5720	MIMO (SDM)	MCS5	16.72	
			MCS6	16.66	
			MCS7	14.62	
			MCS8	14.60	
802.11n (40 MHz)	5510	SISO	MCS0	10.85	10.03
			MCS1	10.84	10.10
			MCS2	10.79	10.05
			MCS3	10.76	9.98
			MCS4	10.73	9.96
			MCS5	10.72	9.92
			MCS6	8.65	7.86
			MCS7	8.63	7.85
		MIMO	MCS0	13.44	
			MCS1	13.44	
			MCS2	13.42	
			MCS3	13.39	
			MCS4	13.39	
			MCS5	13.35	
	MCS6		11.39		
	MCS7		11.36		
	MCS8		13.70		
	MCS9		13.66		
	MCS10		13.62		
	MCS11		13.63		
	MCS12		13.58		
	MCS13	13.54			
	MCS14	11.48			
	MCS15	11.48			
	5550	SISO	MCS0	14.40	13.42
			MCS1	14.55	13.41
			MCS2	14.60	13.41
			MCS3	14.44	13.46
			MCS4	14.47	13.47
			MCS5	14.53	13.42
			MCS6	12.39	11.33
MCS7		12.40	11.33		
MIMO		MCS0	17.16		
		MCS1	17.24		
		MCS2	17.27		
		MCS3	17.15		
		MCS4	17.17		
		MCS5	17.05		
		MCS6	14.97		
		MCS7	15.00		
		MCS8	16.89		
	MCS9	16.98			
MCS10	16.94				
MCS11	16.95				
MCS12	16.95				
MCS13	16.84				

802.11n (40 MHz)	5550	MIMO	MCS14	14.80	
			MCS15	14.79	
802.11n (40 MHz)	5710	SISO	MCS0	14.55	13.67
			MCS1	14.58	13.63
			MCS2	14.61	13.60
			MCS3	14.53	13.58
			MCS4	14.48	13.59
			MCS5	14.44	13.57
			MCS6	12.23	11.50
		MCS7	12.28	11.50	
		MIMO	MCS0	16.97	
			MCS1	16.98	
			MCS2	16.99	
			MCS3	16.91	
			MCS4	16.89	
			MCS5	16.84	
			MCS6	14.75	
			MCS7	14.75	
			MCS8	16.96	
			MCS9	16.96	
			MCS10	16.88	
			MCS11	16.81	
MCS12	16.79				
MCS13	16.79				
MCS14	14.71				
MCS15	14.68				
802.11ac (40 MHz)	5510	SISO	MCS0	9.68	8.77
			MCS1	9.67	8.71
			MCS2	9.60	8.75
			MCS3	9.65	8.62
			MCS4	9.66	8.58
			MCS5	9.57	8.64
			MCS6	9.56	8.53
			MCS7	9.47	8.46
			MCS8	7.35	6.51
		MCS9	7.35	6.47	
		MIMO (CDD)	MCS0	12.24	
			MCS1	12.19	
			MCS2	12.14	
			MCS3	12.13	
			MCS4	12.08	
			MCS5	12.08	
			MCS6	12.01	
			MCS7	12.02	
			MCS8	9.93	
		MCS9	9.96		
		MIMO (SDM)	MCS0	12.16	
			MCS1	12.17	
			MCS2	12.07	
			MCS3	12.09	

802.11ac (40 MHz)	5510	MIMO (SDM)	MCS4	12.12	
			MCS5	12.03	
			MCS6	12.00	
			MCS7	11.99	
			MCS8	9.81	
			MCS9	9.76	
802.11ac (40 MHz)	5550	SISO	MCS0	13.58	12.67
			MCS1	13.50	12.60
			MCS2	13.56	12.65
			MCS3	13.55	12.64
			MCS4	13.47	12.60
			MCS5	13.51	12.57
			MCS6	13.53	12.55
			MCS7	13.40	12.49
			MCS8	11.35	10.38
		MCS9	11.30	10.34	
		MIMO (CDD)	MCS0	16.16	
			MCS1	16.10	
			MCS2	16.12	
			MCS3	16.09	
			MCS4	16.07	
			MCS5	16.07	
			MCS6	16.04	
			MCS7	15.98	
	MCS8		13.90		
	MCS9	13.87			
	MIMO (SDM)	MCS0	16.05		
		MCS1	16.00		
		MCS2	15.98		
		MCS3	16.02		
		MCS4	15.98		
		MCS5	15.98		
		MCS6	16.01		
		MCS7	15.97		
		MCS8	13.90		
	MCS9	13.89			
	5710	SISO	MCS0	14.69	13.26
			MCS1	14.83	13.34
			MCS2	14.59	13.19
			MCS3	14.46	13.08
			MCS4	14.52	13.20
			MCS5	14.54	13.27
MCS6			14.36	13.09	
MCS7			12.38	11.02	
MCS8			11.21	9.96	
MCS9		11.24	10.02		
MIMO (CDD)		MCS0	16.87		
		MCS1	16.95		
		MCS2	16.85		
		MCS3	16.75		

802.11ac (40 MHz)	5710	MIMO (CDD)	MCS4	16.78	
			MCS5	16.71	
			MCS6	16.70	
			MCS7	14.63	
			MCS8	13.60	
			MCS9	13.53	
802.11ac (40 MHz)	5710	MIMO (SDM)	MCS0	16.68	
			MCS1	16.77	
			MCS2	16.67	
			MCS3	16.54	
			MCS4	16.60	
			MCS5	16.66	
			MCS6	16.61	
			MCS7	14.49	
			MCS8	13.45	
			MCS9	13.46	
802.11ac (80 MHz)	5530	SISO	MCS0	10.99	10.20
			MCS1	10.97	10.23
			MCS2	10.97	10.21
			MCS3	10.92	10.17
			MCS4	10.88	10.17
			MCS5	10.89	10.15
			MCS6	10.72	10.16
			MCS7	10.75	10.11
			MCS8	8.66	8.10
			MCS9	8.63	8.13
		MIMO (CDD)	MCS0	13.69	
			MCS1	13.67	
			MCS2	13.68	
			MCS3	13.62	
			MCS4	13.58	
			MCS5	13.56	
			MCS6	13.54	
			MCS7	13.49	
			MCS8	11.44	
			MCS9	11.44	
	MIMO (SDM)	MCS0	13.58		
		MCS1	13.60		
		MCS2	13.62		
		MCS3	13.57		
		MCS4	13.55		
		MCS5	13.55		
		MCS6	13.54		
		MCS7	13.50		
		MCS8	11.45		
	5690	SISO	MCS0	12.91	12.12
			MCS1	12.96	11.97
			MCS2	12.88	12.00
			MCS3	12.87	12.01

802.11ac (80 MHz)	5690	SISO	MCS4	12.78	12.15
			MCS5	12.54	12.10
			MCS6	12.48	11.96
			MCS7	10.38	9.91
			MCS8	9.02	8.73
			MCS9	9.27	8.71
802.11ac (80 MHz)	5690	MIMO (CDD)	MCS0	15.49	
			MCS1	15.39	
			MCS2	15.35	
			MCS3	15.34	
			MCS4	15.40	
			MCS5	15.38	
			MCS6	15.33	
			MCS7	13.19	
			MCS8	12.05	
		MCS9	12.06		
		MIMO (SDM)	MCS0	15.47	
			MCS1	15.45	
			MCS2	15.43	
			MCS3	15.41	
			MCS4	15.39	
			MCS5	15.43	
			MCS6	15.31	
			MCS7	13.25	
MCS8	12.03				
MCS9	12.06				

U-NII-3 Band

Mode	Measured Frequency (MHz)	SISO/MIMO	Datarate	Measured Output Power (dBm)	
				ANT 0 (Aux)	ANT 1 (Main)
802.11a	5745	SISO	6	14.05	12.69
			9	14.08	12.62
			12	14.11	12.65
			18	14.13	12.66
			24	14.07	12.60
			36	14.06	12.57
			48	12.04	10.48
			54	12.08	10.49
		MIMO	6	16.39	
			9	16.35	
			12	16.37	
			18	16.35	
			24	16.37	
			36	16.35	
	48		14.34		
	54		14.32		
	5785	SISO	6	13.91	13.54
			9	14.00	13.56
			12	13.97	13.59
			18	14.01	13.52
			24	13.95	13.45
			36	14.17	13.39
			48	11.99	11.88
			54	11.99	11.61
		MIMO	6	16.68	
			9	16.77	
			12	16.79	
			18	16.72	
24			16.67		
36			16.61		
48	14.70				
54	14.67				
5825	SISO	6	14.04	13.05	
		9	14.03	13.03	
		12	14.01	13.01	
		18	13.97	12.88	
		24	13.95	12.81	
		36	13.90	12.79	
		48	11.87	11.02	
		54	11.88	10.89	
	MIMO	6	16.57		
		9	16.53		
		12	16.49		
		18	16.48		
		24	16.45		

802.11a	5825	MIMO	36	16.45	
			48	14.36	
			54	14.31	
802.11n (20 MHz)	5745	SISO	MCS0	13.49	12.71
			MCS1	13.51	12.65
			MCS2	13.55	12.60
			MCS3	13.56	12.62
			MCS4	13.50	12.49
			MCS5	13.47	12.56
			MCS6	11.38	11.44
			MCS7	11.35	11.29
		MIMO	MCS0	16.16	
			MCS1	16.16	
			MCS2	16.16	
			MCS3	16.13	
			MCS4	16.08	
			MCS5	16.09	
			MCS6	14.01	
	MCS7		13.99		
	MCS8		16.12		
	MCS9		16.10		
	MCS10		16.12		
	MCS11		16.08		
	MCS12		16.07		
	MCS13		15.99		
	MCS14		13.89		
	MCS15		13.86		
	5785		SISO	MCS0	13.63
		MCS1		13.50	12.61
		MCS2		13.73	12.81
		MCS3		13.74	12.80
		MCS4		13.89	13.02
		MCS5		13.88	12.99
		MCS6		11.92	10.87
		MCS7		11.79	10.99
		MIMO	MCS0	16.37	
MCS1			16.43		
MCS2			16.49		
MCS3			16.57		
MCS4			16.76		
MCS5			16.61		
MCS6			14.56		
MCS7			14.59		
MCS8			16.35		
MCS9			16.40		
MCS10	16.38				
MCS11	16.38				
MCS12	16.44				
MCS13	16.30				
MCS14	14.34				

802.11n	5785	MIMO	MCS15	14.31	
802.11n (20 MHz)	5825	SISO	MCS0	13.75	12.65
			MCS1	13.69	12.63
			MCS2	13.58	12.60
			MCS3	13.62	12.60
			MCS4	13.55	12.57
			MCS5	13.51	12.54
			MCS6	11.38	10.30
			MCS7	11.35	10.33
		MIMO	MCS0	16.22	
			MCS1	16.20	
			MCS2	16.16	
			MCS3	16.12	
			MCS4	16.05	
			MCS5	16.05	
			MCS6	14.02	
			MCS7	14.03	
			MCS8	16.20	
			MCS9	16.18	
			MCS10	16.19	
			MCS11	16.18	
MCS12	16.17				
MCS13	16.10				
MCS14	13.96				
MCS15	13.96				
802.11ac (20 MHz)	5745	SISO	MCS0	13.95	13.16
			MCS1	13.87	13.11
			MCS2	13.92	13.06
			MCS3	13.84	13.01
			MCS4	13.88	12.99
			MCS5	13.76	12.96
			MCS6	13.74	12.81
			MCS7	11.58	10.77
			MCS8	11.62	10.65
		MIMO (CDD)	MCS0	16.51	
			MCS1	16.49	
			MCS2	16.44	
			MCS3	16.46	
			MCS4	16.37	
			MCS5	16.35	
			MCS6	16.29	
			MCS7	14.16	
			MCS8	14.15	
		MIMO (SDM)	MCS0	16.43	
			MCS1	16.43	
			MCS2	16.40	
			MCS3	16.36	
			MCS4	16.29	
			MCS5	16.27	
			MCS6	16.18	

802.11ac (20 MHz)	5745	MIMO (SDM)	MCS7	14.09	
			MCS8	14.06	
802.11ac (20 MHz)	5785	SISO	MCS0	13.91	13.09
			MCS1	13.48	12.61
			MCS2	13.63	12.90
			MCS3	13.73	12.96
			MCS4	13.88	12.96
			MCS5	13.63	13.01
			MCS6	13.76	12.96
			MCS7	11.75	10.90
		MCS8	10.64	9.68	
		MIMO (CDD)	MCS0	16.72	
			MCS1	16.36	
			MCS2	16.40	
			MCS3	16.50	
			MCS4	16.65	
			MCS5	16.56	
			MCS6	16.54	
			MCS7	14.54	
		MCS8	13.35		
		MIMO (SDM)	MCS0	16.65	
			MCS1	16.33	
			MCS2	16.37	
			MCS3	16.31	
			MCS4	16.44	
			MCS5	16.40	
			MCS6	16.34	
			MCS7	14.27	
		MCS8	13.17		
		802.11ac (20 MHz)	5825	SISO	MCS0
MCS1	13.93				13.12
MCS2	13.90				13.07
MCS3	13.88				13.01
MCS4	13.81				12.87
MCS5	13.85				12.85
MCS6	13.77				12.83
MCS7	11.68				10.71
MCS8	11.65			10.66	
MIMO (CDD)	MCS0			16.56	
	MCS1			16.52	
	MCS2			16.53	
	MCS3			16.52	
	MCS4			16.48	
	MCS5			16.41	
	MCS6			16.38	
	MCS7			14.28	
MCS8	14.26				
MIMO (SDM)	MCS0			16.35	
	MCS1			16.37	
	MCS2	16.26			

802.11ac (20 MHz)	5825	MIMO (SDM)	MCS3	16.33	
			MCS4	16.28	
			MCS5	16.18	
			MCS6	16.10	
			MCS7	14.03	
			MCS8	14.01	
802.11n (40 MHz)	5755	SISO	MCS0	13.89	13.10
			MCS1	13.84	13.00
			MCS2	13.85	12.98
			MCS3	13.88	12.92
			MCS4	13.79	12.90
			MCS5	13.72	12.88
			MCS6	11.65	10.80
		MCS7	11.63	10.73	
		MIMO	MCS0	16.53	
			MCS1	16.50	
			MCS2	16.48	
			MCS3	16.42	
			MCS4	16.38	
			MCS5	16.35	
	MCS6		14.32		
	MCS7		14.30		
	MCS8		16.40		
	MCS9		16.24		
	MCS10		16.31		
	MCS11		16.27		
	MCS12		16.23		
	MCS13	16.20			
	MCS14	14.11			
	MCS15	14.06			
	5795	SISO	MCS0	13.70	13.15
			MCS1	13.71	13.12
			MCS2	13.90	13.12
			MCS3	13.95	13.01
			MCS4	13.98	13.11
			MCS5	13.89	13.00
MCS6			12.02	11.09	
MCS7		11.89	11.02		
MIMO		MCS0	16.61		
		MCS1	16.74		
		MCS2	16.69		
		MCS3	16.56		
		MCS4	16.66		
		MCS5	16.52		
		MCS6	14.53		
		MCS7	14.47		
	MCS8	16.33			
MCS9	16.43				
MCS10	16.42				
MCS11	16.35				

802.11n (40 MHz)	5795	MIMO	MCS12	16.50	
			MCS13	16.38	
			MCS14	14.38	
			MCS15	14.34	
802.11ac (40 MHz)	5755	SISO	MCS0	14.05	13.26
			MCS1	14.09	13.33
			MCS2	14.02	13.31
			MCS3	13.97	13.24
			MCS4	13.92	13.20
			MCS5	13.90	13.12
			MCS6	13.85	13.06
			MCS7	13.78	13.03
			MCS8	11.66	10.97
		MCS9	11.60	10.90	
		MIMO (CDD)	MCS0	16.59	
			MCS1	16.60	
			MCS2	16.55	
			MCS3	16.55	
			MCS4	16.53	
			MCS5	16.47	
			MCS6	16.42	
			MCS7	16.37	
	MCS8		14.29		
	MIMO (SDM)	MCS0	16.63		
		MCS1	16.59		
		MCS2	16.54		
		MCS3	16.45		
		MCS4	16.45		
		MCS5	16.40		
		MCS6	16.35		
		MCS7	16.30		
		MCS8	14.15		
	MCS9	14.12			
	5795	SISO	MCS0	14.15	13.46
			MCS1	14.13	13.49
			MCS2	13.74	13.24
			MCS3	13.63	13.11
			MCS4	13.65	13.15
			MCS5	13.70	13.23
			MCS6	13.64	13.06
MCS7			11.56	11.13	
MCS8			10.53	9.98	
MCS9		10.55	9.84		
MIMO (CDD)		MCS0	16.96		
		MCS1	16.78		
		MCS2	16.60		
		MCS3	16.51		
		MCS4	16.58		
		MCS5	16.46		

802.11ac (40 MHz)	5795	MIMO (CDD)	MCS6	16.35	
			MCS7	14.39	
			MCS8	13.25	
			MCS9	13.25	
802.11ac (40 MHz)	5795	MIMO (SDM)	MCS0	16.91	
			MCS1	16.95	
			MCS2	16.64	
			MCS3	16.60	
			MCS4	16.58	
			MCS5	16.54	
			MCS6	16.43	
			MCS7	14.60	
			MCS8	13.40	
			MCS9	13.49	
802.11ac (80 MHz)	5775	SISO	MCS0	14.13	13.52
			MCS1	14.03	13.49
			MCS2	13.53	13.26
			MCS3	13.54	13.15
			MCS4	13.53	13.25
			MCS5	13.60	13.20
			MCS6	13.57	13.25
			MCS7	11.61	11.06
			MCS8	10.53	10.01
			MCS9	10.54	10.06
		MIMO (CDD)	MCS0	16.77	
			MCS1	16.80	
			MCS2	16.45	
			MCS3	16.48	
			MCS4	16.62	
			MCS5	16.54	
			MCS6	16.52	
			MCS7	14.50	
			MCS8	13.49	
			MCS9	13.40	
		MIMO (SDM)	MCS0	16.63	
			MCS1	16.52	
			MCS2	16.22	
			MCS3	16.17	
			MCS4	16.29	
			MCS5	16.30	
			MCS6	16.18	
			MCS7	14.26	
			MCS8	13.19	
			MCS9	13.14	

10. SYSTEM VERIFICATION

10.1 Tissue Verification

For the measurement of the following parameters (Table 10.1) the DAK-3.5 was used, representing the open-ended slim form probe measurement procedure. The measured values should be within $\pm 5\%$ of the recommended values given by IEC/IEEE 62209-1528.

Table 10.1 Measured Tissue Parameters

Date	Liquid Type	Liquid Temp. (°C)	Freq (MHz)	Measured relative Permittivity (ε)	Measured Conductivity (S/m)	Target relative Permittivity (ε)	Target Conductivity (S/m)	Permittivity Error (%)	Conductivity Error (%)
Aug 03.2021	2G /Head	21.00	2412	38.34	1.74	39.27	1.77	-2.36	-1.36
			2437	37.90	1.80	39.22	1.79	-3.37	0.67
			2462	37.76	1.87	39.19	1.81	-3.64	3.14
July 22.2021	5G /Head	21.80	5180	36.26	4.69	36.01	4.64	0.70	1.08
			5220	36.17	4.68	35.96	4.68	0.58	0.17
			5240	35.93	4.70	35.94	4.70	-0.03	0.06
			5260	35.85	4.73	35.92	4.72	0.00	-1.11
			5300	35.89	4.83	35.87	4.76	0.11	1.11
			5320	35.92	4.84	35.85	4.78	0.20	1.36
July 23.2021	5G /Head	21.30	5180	35.80	4.52	36.01	4.64	-0.58	-2.50
			5220	35.69	4.55	35.96	4.68	-0.76	-2.80
			5240	35.58	4.57	35.94	4.70	-1.00	-2.77
			5260	35.52	4.59	35.92	4.72	-0.92	-3.85
			5300	35.52	4.64	35.87	4.76	-0.92	-2.85
			5320	35.53	4.66	35.85	4.78	-0.89	-2.51
July 26.2021	5G /Head	21.50	5500	35.45	4.91	35.64	4.96	-0.54	-1.05
			5560	35.35	4.98	35.57	5.02	-0.63	-0.80
			5600	35.13	5.03	35.53	5.07	-1.12	-0.69
			5700	35.10	5.14	35.41	5.17	-0.61	-2.23
			5745	34.93	5.21	35.36	5.21	-1.10	-0.88
			5785	34.85	5.25	35.32	5.26	-1.32	-0.08
			5825	34.82	5.27	35.27	5.30	-1.28	-0.53
July 27.2021	5G /Head	21.40	5600	35.61	5.05	35.53	5.07	0.23	-0.24
			5700	35.47	5.16	35.41	5.17	0.43	-1.83
			5745	35.35	5.23	35.36	5.21	0.09	-0.40
			5785	35.22	5.26	35.32	5.26	-0.27	0.04
			5825	35.21	5.30	35.27	5.30	-0.17	0.08
July 28.2021	5G /Head	21.30	5600	35.24	4.96	35.53	5.07	-0.81	-2.17
			5700	34.96	5.08	35.41	5.17	-1.01	-3.35
			5745	34.90	5.16	35.36	5.21	-1.18	-1.90
			5785	34.79	5.15	35.32	5.26	-1.49	-1.92
			5825	34.61	5.20	35.27	5.30	-1.87	-1.81
July 29.2021	5G /Head	21.50	5180	35.55	4.52	36.01	4.64	-1.27	-2.48
			5220	35.34	4.53	35.96	4.68	-1.73	-3.12
			5240	35.24	4.56	35.94	4.70	-1.95	-2.87
			5260	35.17	4.61	35.92	4.72	-1.89	-3.58
			5300	35.20	4.67	35.87	4.76	-1.81	-2.37
			5320	35.17	4.67	35.85	4.78	-1.89	-2.20

Date	Liquid Type	Liquid Temp. (°C)	Freq (MHz)	Measured relative Permittivity (ε)	Measured Conductivity (S/m)	Target relative Permittivity (ε)	Target Conductivity (S/m)	Permittivity Error (%)	Conductivity Error (%)
Aug 01.2021	5G /Head	21.30	5180	36.45	4.58	36.01	4.64	1.22	-1.21
			5220	36.37	4.57	35.96	4.68	1.13	-2.22
			5240	36.18	4.58	35.94	4.70	0.67	-2.56
			5260	36.07	4.61	35.92	4.72	0.62	-3.56
			5300	36.20	4.70	35.87	4.76	0.98	-1.63
			5320	36.26	4.70	35.85	4.78	1.15	-1.74
Aug 02.2021	5G /Head	21.40	5700	34.74	5.11	35.41	5.17	-1.63	-2.78
			5745	34.65	5.17	35.36	5.21	-1.89	-1.64
			5785	34.53	5.20	35.32	5.26	-2.23	-1.12
			5825	34.41	5.25	35.27	5.30	-2.44	-0.83

10.2 Test System Verification

A complete 1 g and/or 10 g averaged SAR measurement is performed using a standard source. The input power of the standard source is adjusted to produce a 1 g and/or 10 g averaged SAR value falling in the range of 0.4 W/kg to 10 W/kg. The 1 g and/or 10 g averaged SAR is measured at frequencies in Table 10.2 within the range to be used in compliance tests. The results are normalized to 1 W forward input power and compared with the reference SAR value. Refer to Appendix B for each plot.


Table 10.2 System Verification Results

Date	Liquid Temperature (°C)	Measured Frequency (MHz)	Targeted 1 g SAR (W/kg)	Measured 1 g SAR (W/kg)	Normalized 1 g SAR (W/kg)	Deviation (%)	Verification Kit	Plot No.
Aug 03.2021	21.00	2450	51.80	13.40	53.60	3.47	D2450V2 SN: 774	#V01
July 22.2021	21.80	5200	77.70	19.30	77.20	-0.64	D5GHzV2 SN: 1146	#V02
		5300	80.10	20.00	80.00	-0.12	D5GHzV2 SN: 1146	#V03
July 23.2021	21.30	5200	77.70	19.00	76.00	-2.19	D5GHzV2 SN: 1146	#V04
		5300	80.10	19.70	78.80	-1.62	D5GHzV2 SN: 1146	#V05
July 26.2021	21.50	5500	84.00	20.40	81.60	-2.86	D5GHzV2 SN: 1146	#V06
		5600	83.90	20.80	83.20	-0.83	D5GHzV2 SN: 1146	#V07
July 27.2021	21.40	5600	83.90	21.00	84.00	0.12	D5GHzV2 SN: 1146	#V08
		5800	80.00	20.60	82.40	3.00	D5GHzV2 SN: 1146	#V09
July 28.2021	21.30	5800	80.00	19.70	78.80	-1.50	D5GHzV2 SN: 1146	#V10
July 29.2021	21.50	5200	77.70	19.80	79.20	1.93	D5GHzV2 SN: 1146	#V11
		5300	80.10	19.40	77.60	-3.12	D5GHzV2 SN: 1146	#V12
Aug 01.2021	21.30	5200	77.70	19.60	78.40	0.90	D5GHzV2 SN: 1146	#V13
		5300	80.10	20.10	80.40	0.37	D5GHzV2 SN: 1146	#V14
Aug 02.2021	21.40	5800	80.00	19.90	79.60	-0.50	D5GHzV2 SN: 1146	#V15

10.3 System Verification Test Setup

The system verification is verified to the $\pm 10\%$ of the specifications at each frequency band by using the system validation kit.

1. Perform internal calibration of each equipment.
2. Cabling the system, using the verification kit equipment.
3. The input level is set to be about 250 mW from the signal generator to the dipole antenna.
4. Dipole antenna was located below the phantom.
5. System verification was performed and 1g / 10g SAR was measured.
6. The results were normalized to 1 W input power.
7. Check if the 1 W normalized value was within $\pm 10\%$ of the target value.

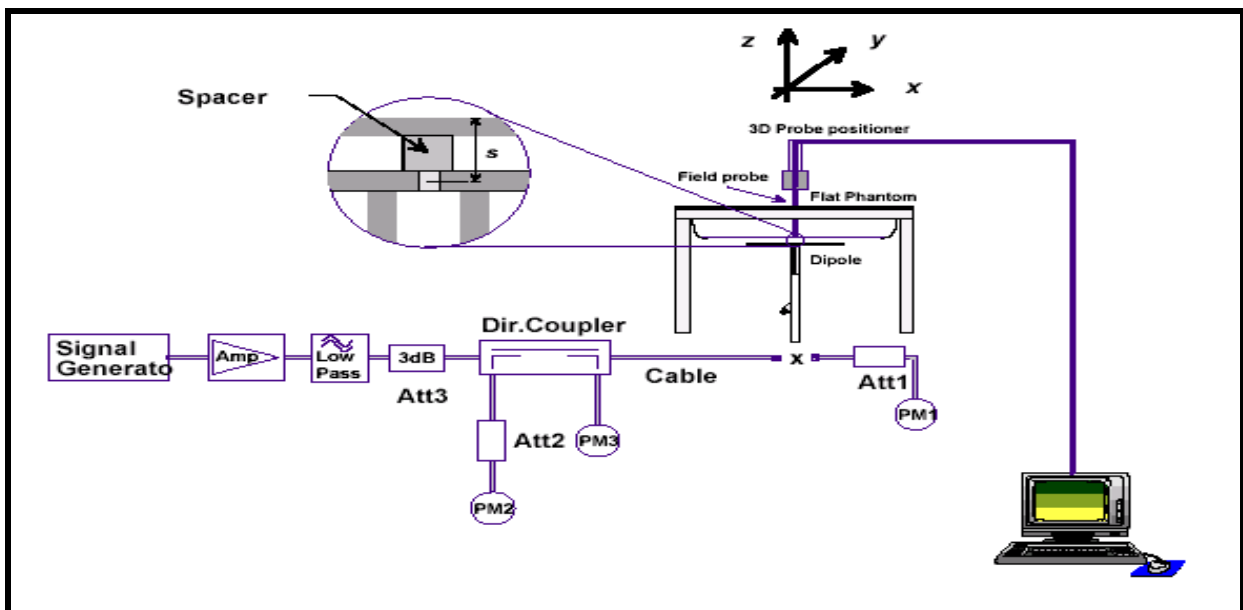

11. SAR MEASUREMENT RESULTS

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = Maximum Tune-up limit power (mW) / EUT RF Power (mW),

Where tune-up limit is the maximum rated power among all production units.

Reported SAR (W/kg) = Scaling Factor * Duty Factor * Measured SAR (W/kg)

2. Tune-up limit power is refer to page 13.

DTS Band : Ant 0 (Aux)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
2437	6	HT40 MCS4	Front	76.74	100	1.30	1.25	0 mm	0.012	0.019	#S01
2452	9			32.58	39.81	1.22	1.25		0.006	0.009	
2422	3			14.13	19.95	1.41	1.25		0.007	0.012	

DTS Band : Ant 1 (Main)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
2437	6	HT40 MCS2	Front	76.56	100	1.31	1.29	0 mm	0.029	0.049	#S02
2452	9			31.41	39.81	1.27	1.07		0.014	0.019	
2422	3			14.26	19.95	1.40	1.29		0.009	0.017	

DTS Band : Simultaneous Transmission SAR

Position	Ant 0 (Aux) (W/kg)	Ant 1 (Main) (W/kg)	Sum of peak SAR (W/kg)
Front	0.019	0.049	0.068

U-NII-1 Band : Ant 0 (Aux)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
5230	46	HT40 MCS0	Front	24.83	25.12	1.01	1.05	0 mm	0.015	0.016	#S03
5190	38			9.42	12.59	1.34	1.05		0.008	0.011	

U-NII-1 Band: Ant 1 (Main)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
5180	36	HT20 MCS0	Front	19.50	25.12	1.29	1.03	0 mm	0.020	0.026	#S04
5200	40			18.79	25.12	1.34	1.03		0.013	0.017	
5240	48			11.94	15.85	1.33	1.03		0.006	0.008	

U-NII-1 Band: Simultaneous Transmission SAR

Position	Ant 0 (Aux) (W/kg)	Ant 1 (Main) (W/kg)	Sum of peak SAR (W/kg)
Front	0.016	0.026	0.042

U-NII-2A Band : Ant 0 (Aux)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
5270	54	VHT40 MCS4	Front	24.15	39.81	1.65	1.31	0 mm	0.020	0.043	#S05
5310	62			14.79	19.95	1.35	1.33		0.015	0.026	

U-NII-2A Band: Ant 1 (Main)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
5270	54	VHT40 MCS0	0 mm	18.58	31.62	1.70	1.05	Front	0.014	0.024	
5310	62			13.21	19.95	1.51	1.05	Front	0.017	0.026	#S06

U-NII-2A Band: Simultaneous Transmission SAR

Position	Ant 0 (Aux) (W/kg)	Ant 1 (Main) (W/kg)	Sum of peak SAR (W/kg)
Front	0.043	0.026	0.069

U-NII-2C Band : Ant 0 (Aux)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
5720	144	6 Mbps	Front	30.76	39.81	1.29	1.02	0 mm	0.060	0.080	#S07
5580	116			27.42	39.81	1.45	1.02		0.048	0.072	
5500	100			17.58	25.12	1.43	1.02		0.008	0.011	

U-NII-2C Band: Ant 1 (Main)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
5720	144	HT20 MCS4	Front	26.73	39.81	1.49	1.25	0 mm	0.020	0.038	
5580	116			20.99	39.81	1.90	1.25		0.049	0.116	#S08
5500	100			20.94	39.81	1.90	1.23		0.018	0.043	

U-NII-2C Band: Simultaneous Transmission SAR

Position	Ant 0 (Aux) (W/kg)	Ant 1 (Main) (W/kg)	Sum of peak SAR (W/kg)
Front	0.080	0.116	0.196

U-NII-3 Band : Ant 0 (Aux)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
5785	157	36 Mbps	Front	26.12	39.81	1.52	1.34	0 mm	0.064	0.131	#S09
5745	149			25.47	39.81	1.56	1.32		0.057	0.118	
5825	165			24.55	39.81	1.62	1.34		0.021	0.046	

U-NII-3 Band: Ant 1 (Main)

Meas. Freq		Mode	EUT Configuration	Average Power (mW)	Maximum Tune-Up Limit pwr (mW)	Scaling Factor	Duty Factor	Test distance	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot No.
MHz	CH										
5785	157	12 Mbps	Front	22.86	39.81	1.74	1.05	0 mm	0.017	0.030	
5745	149			18.41	31.62	1.72	1.05		0.019	0.034	
5825	165			20.00	31.62	1.58	1.05		0.023	0.039	#S10

U-NII-3 Band: Simultaneous Transmission SAR

Position	Ant 0 (Aux) (W/kg)	Ant 1 (Main) (W/kg)	Sum of peak SAR (W/kg)
Front	0.131	0.039	0.170

12. TEST EQUIPMENTS

Description	Model	Serial No.	Data of next Calibration
Shield Room	NKRFS1	20020415	N/A
Staubli Robot Unit	RX60L	F05/51E1A1/A/01	N/A
Electro-Optical Converter	EOC3	398	N/A
Oval Flat phantom ELI v6.0	ELI V6.0	2014	N/A
Device Holder	DH2005	SD HAC H01CA	N/A
Dielectric Probe Kit	85070E	MY44300121	N/A
Data Acquisition Electronics	DAE4	672	2021.09.18
E-Field Probe	EX3DV4	3910	2021.08.14
Validation Dipole Antenna	D2450V2	774	2022.04.20
Validation Dipole Antenna	D5GHzV2	1146	2023.01.25
Digital thermometer	DTM3000	3187	2021.10.14
Power Amplifier	5800842	-	2022.01.11
Network Analyzer	8753E	JP38161044	2021.10.13
Dual Directional Coupler	11692D	1212A02175	2022.07.12
Switch and Power detector Unit	OSP120	100857	2022.01.12
Power Meter	NRVS	835360/002	2022.01.12
Power Sensor	NRV-Z5	833722/006	2022.01.12
Power Meter	437B	2912U01687	2021.10.12
Power Sensor	8481A	MY41098315	2021.10.12
USB Wideband Power Sensor	U2022XA	MY56040009	2022.07.13
Signal Generator	SMB100A	175861	2022.07.13
Dielectric Field probe	DAK 3.5	1128	2021.08.19
10 dB Attenuator	8491B	57773	2021.10.13
10 dB Attenuator	40A2W-10	1914	2022.07.12

13. CONCLUSION

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada,, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. The results and statements relate only to the item(s) tested.

APPENDIX A. PLOTS OF SAR RESULTS

#S01

Date/Time: 2021-08-03 PM 5:19:03

Test Laboratory: Nemko Korea File Name: [Port1_Front CH HT40MCS4 2437MHz_lvl18_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 2.4G Frequency: 2437 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.8 \text{ mho/m}$; $\epsilon_r = 37.9$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(7.45, 7.45, 7.45); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (8x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.017 mW/g


LG detector Front Gap 0mm Position/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.70 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.026 W/kg

SAR(1 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

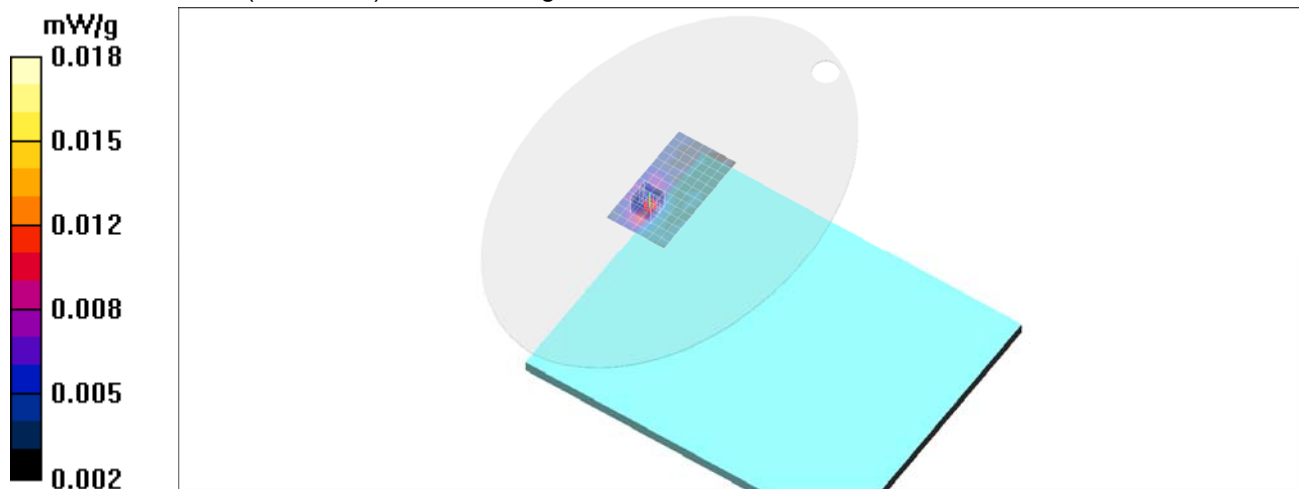

#S02

Date/Time: 2021-08-04 AM 1:08:43

Test Laboratory: Nemko Korea File Name: [Port2_Front_CH_HT40MCS2_2437MHz_lvl18_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 2.4G Frequency: 2437 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(7.45, 7.45, 7.45); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (8x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.047 mW/g


LG detector Front Gap 0mm Position/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.14 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.075 W/kg

SAR(1 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

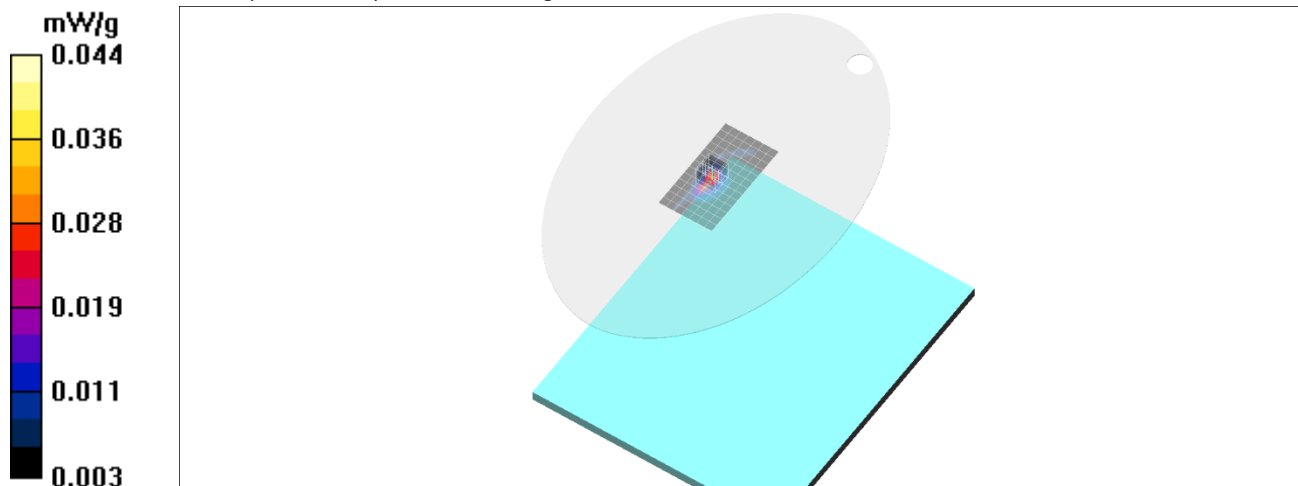

#S03

Date/Time: 2021-07-23 AM 12:28:06

Test Laboratory: Nemko Korea File Name: [Port1_Front_CH46_5230MHz_HT40MCS0_lv13_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 5G Frequency: 5230 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.7$ mho/m; $\epsilon_r = 36.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(5.2, 5.2, 5.2); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Back Gap 0mm Position/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.031 mW/g


LG detector Back Gap 0mm Position/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.034 mW/g

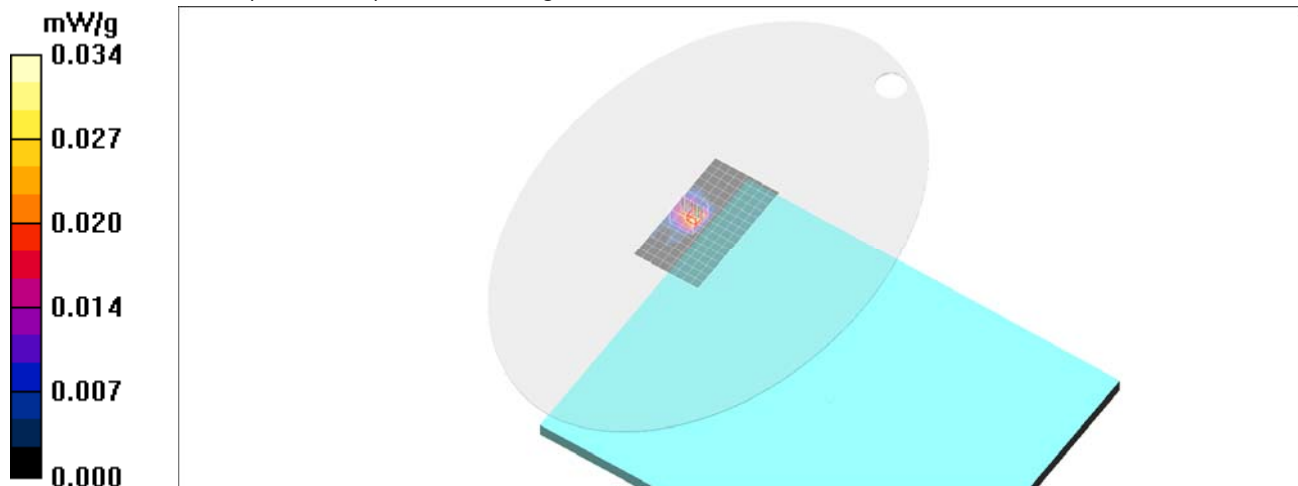

#S04

Date/Time: 2021-07-23 PM 8:15:27

Test Laboratory: Nemko Korea File Name: [Port2_Front_CH36_5180MHz_HT20MCS0_lv12_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 5G Frequency: 5180 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.52 \text{ mho/m}$; $\epsilon_r = 35.8$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(5.2, 5.2, 5.2); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (9x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.040 mW/g


LG detector Front Gap 0mm Position/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.72 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

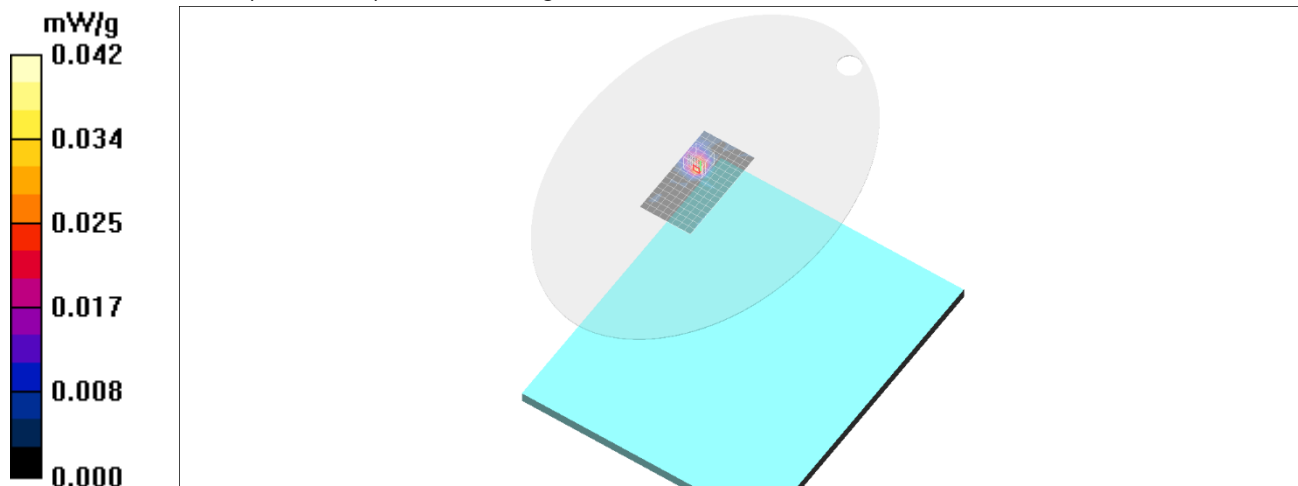

#S05

Date/Time: 2021-08-01 PM 5:02:59

Test Laboratory: Nemko Korea File Name: [Port1_Front CH 5270MHz VHT40MCS4 lv13_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 5G Frequency: 5270 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.63$ mho/m; $\epsilon_r = 36.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(5.05, 5.05, 5.05); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.041 mW/g


LG detector Front Gap 0mm Position/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.791 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.076 W/kg

SAR(1 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

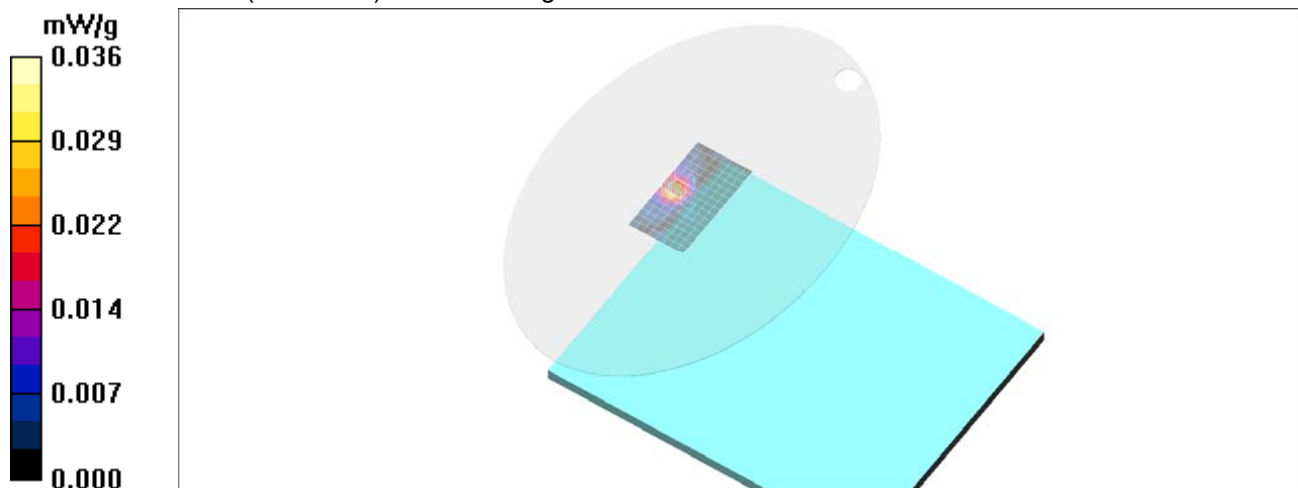

#S06

Date/Time: 2021-08-01 PM 9:05:58

Test Laboratory: Nemko Korea File Name: [Port2_Front CH 5310MHz VHT40MCS0 lv11_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 5G Frequency: 5310 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.7$ mho/m; $\epsilon_r = 36.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(5.2, 5.2, 5.2); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 0.033 mW/g

LG detector Front Gap 0mm Position/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.017 mW/g

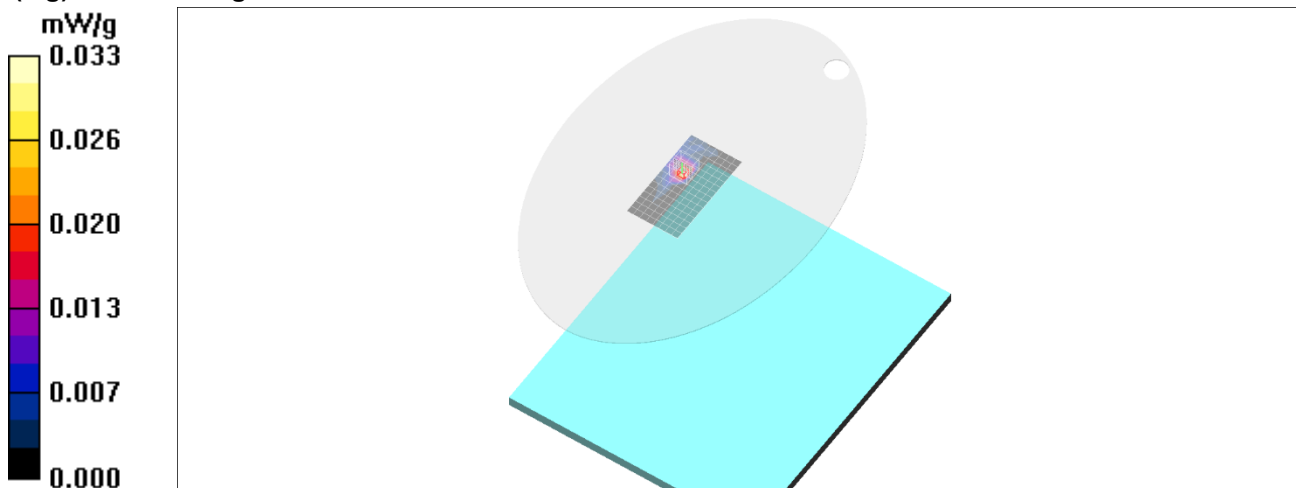

#S07

Date/Time: 2021-07-27 PM 3:40:49

Test Laboratory: Nemko Korea File Name: [Port1_Front CH 5720MHz 6Mbps Iv13_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 5G Frequency: 5720 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5720$ MHz; $\sigma = 5.2$ mho/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(4.6, 4.6, 4.6); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (measured) = 0.125 mW/g

LG detector Front Gap 0mm Position/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.060 mW/g

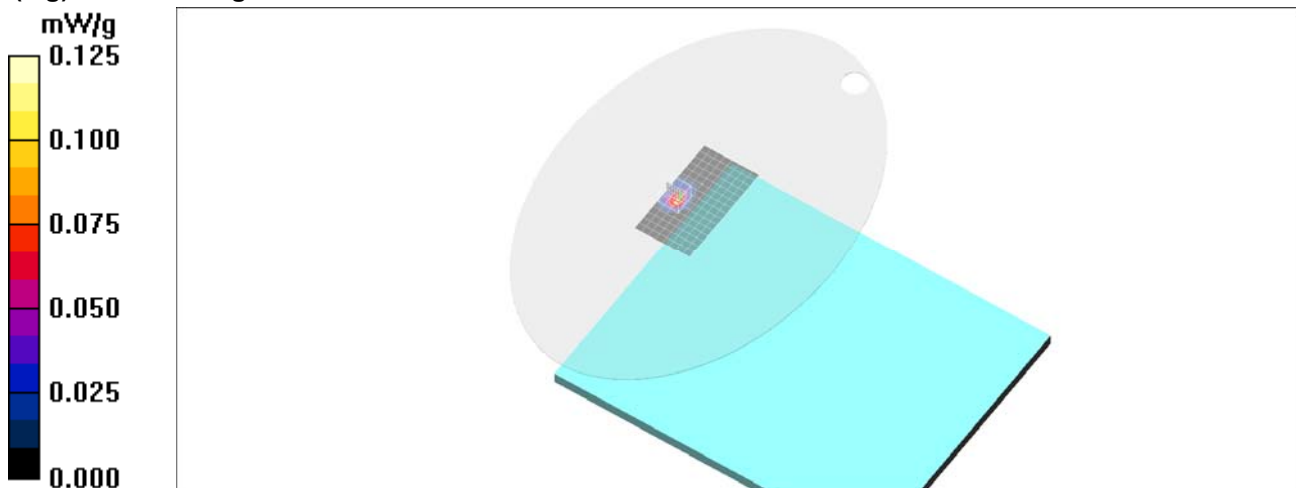

#S08

Date/Time: 2021-07-26 PM 9:53:21

Test Laboratory: Nemko Korea File Name: [Port2_Front CH 5580MHz HT20MCS4 lv13_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 5G Frequency: 5580 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5580$ MHz; $\sigma = 5$ mho/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(4.75, 4.75, 4.75); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.089 mW/g


LG detector Front Gap 0mm Position/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.87 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.088 mW/g

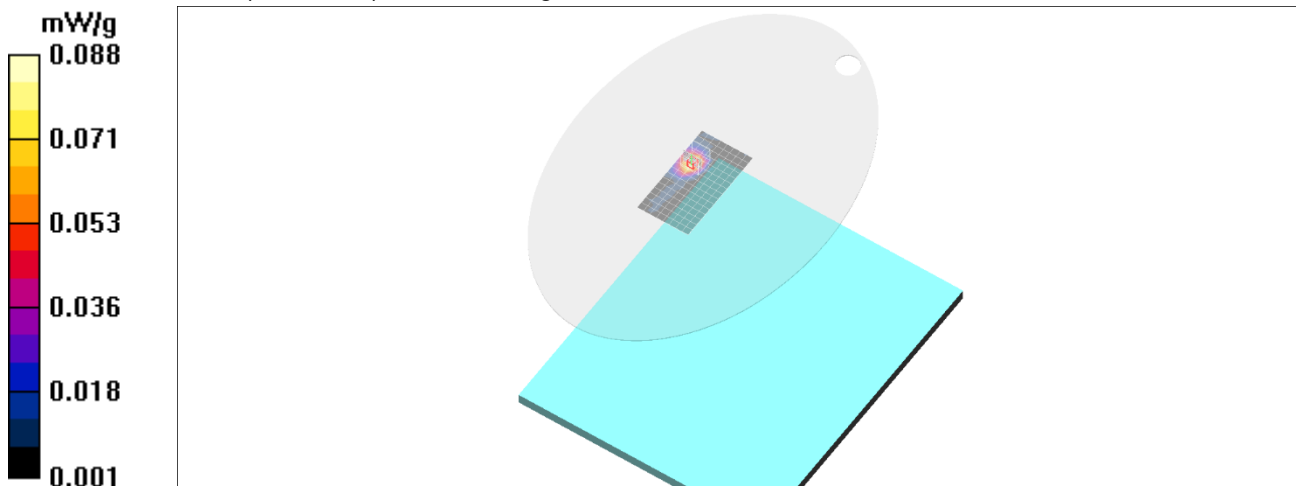

#S09

Date/Time: 2021-07-27 PM 4:34:18

Test Laboratory: Nemko Korea File Name: [Port1_Front CH 5785MHz 36Mbps lv13_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 5G Frequency: 5785 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.26 \text{ mho/m}$; $\epsilon_r = 35.2$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(4.6, 4.6, 4.6); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (9x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.128 mW/g


LG detector Front Gap 0mm Position/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.136 mW/g

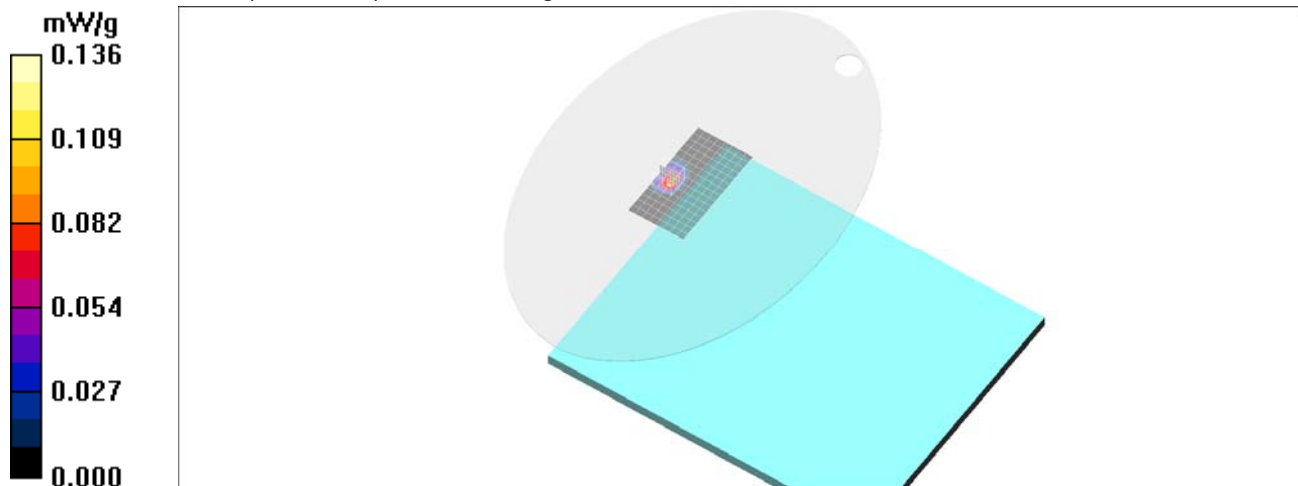

#S10

Date/Time: 2021-07-28 PM 11:58:01

Test Laboratory: Nemko Korea File Name: [Port2_Front CH 5825MHz 12Mbps lv13_0mm.da4](#)

DUT: 14HQ901G Type: X-ray detector Serial: N/A

Communication System: WLAN 5G Frequency: 5825 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.2 \text{ mho/m}$; $\epsilon_r = 34.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(4.6, 4.6, 4.6); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LG detector Front Gap 0mm Position/Area Scan (9x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.037 mW/g


LG detector Front Gap 0mm Position/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

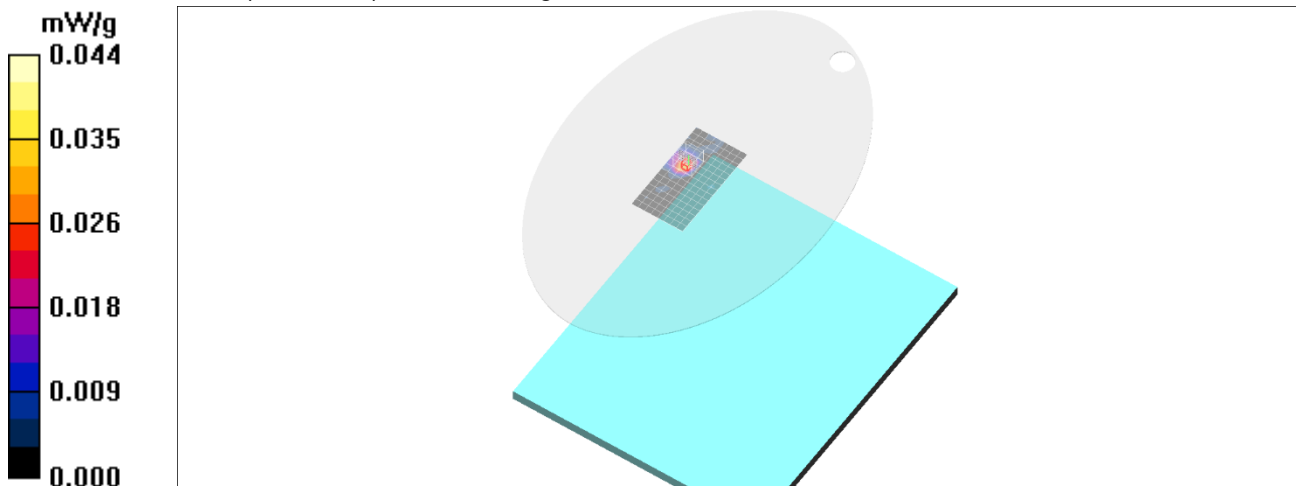

APPENDIX B. PLOTS OF SYSTEM VERIFICATION

#V01

Date/Time: 2021-08-03 PM 4:13:29

Test Laboratory: Nemko Korea File Name: [System Verification for 2.45GHz 2021-08-03.da4](#)**DUT: Dipole 2450 MHz Type: D2450V2 Serial: D2450V2 - SN:774**

Communication System: CW (2.4G) Frequency: 2450 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(7.45, 7.45, 7.45); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2.4GHz System Verification/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 20.1 mW/g

2.4GHz System Verification/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 102.4 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.12 mW/g

Maximum value of SAR (measured) = 20.0 mW/g

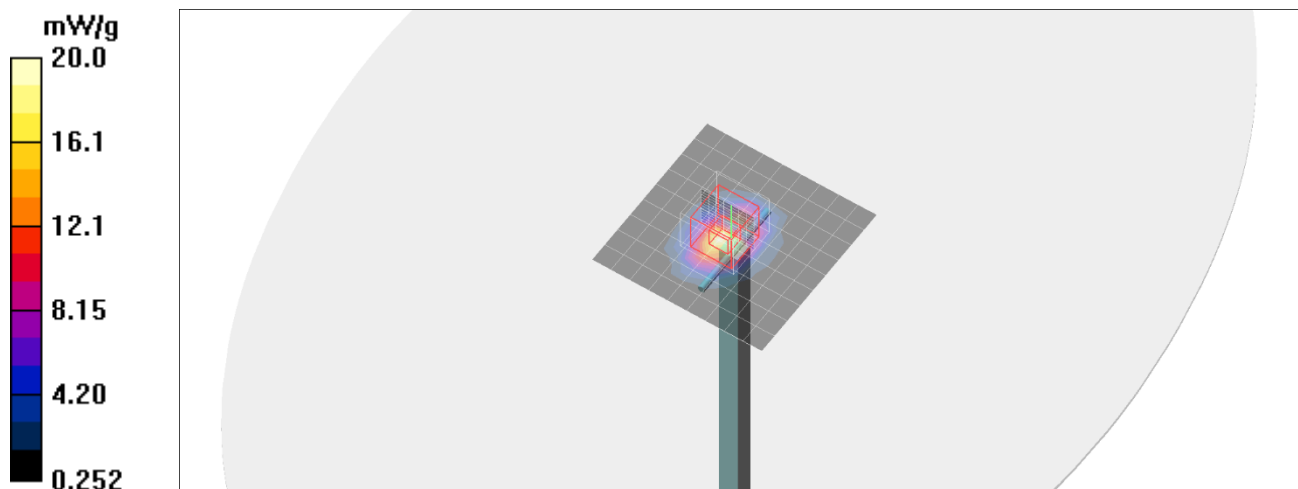

Date/Time: 2021-07-22 PM 1:56:37

Test Laboratory: Nemko Korea File Name: [System Verification for 5.2GHz_2021-07-22.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5200 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.69 \text{ mho/m}$; $\epsilon_r = 36.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(5.2, 5.2, 5.2); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.2GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 28.9 mW/g

5.2GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 97.2 V/m; Power Drift = 0.065 dB
Peak SAR (extrapolated) = 72.5 W/kg
SAR(1 g) = 19.3 mW/g; SAR(10 g) = 5.61 mW/g
Maximum value of SAR (measured) = 37.1 mW/g

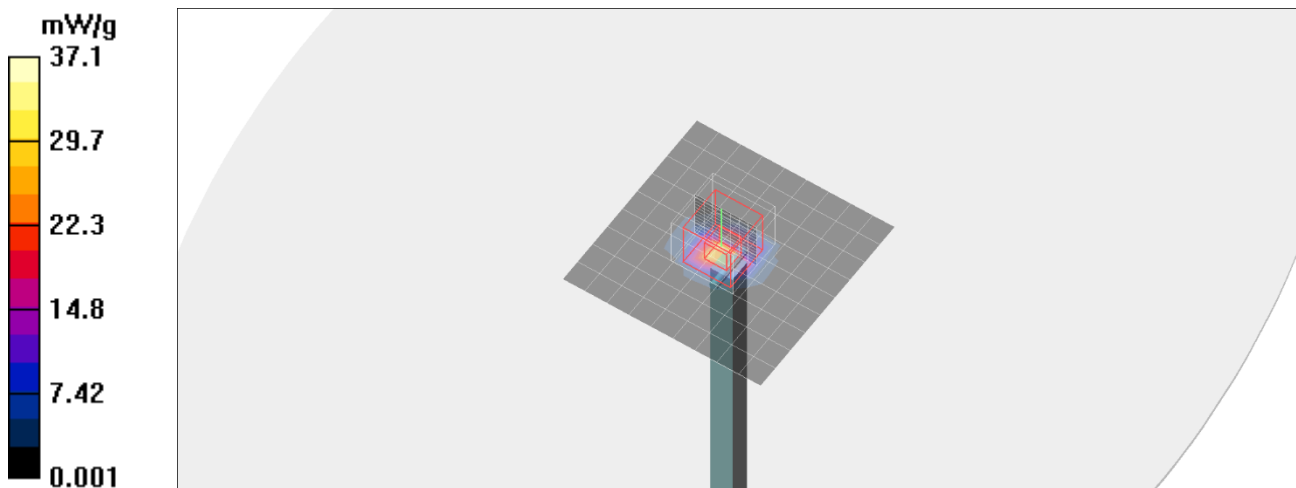

Date/Time: 2021-07-22 PM 2:43:56

Test Laboratory: Nemko Korea File Name: [System Verification for 5.3GHz_2021-07-22.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5300 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.83 \text{ mho/m}$; $\epsilon_r = 35.9$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(5.05, 5.05, 5.05); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.3GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 30.4 mW/g

5.3GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 97.3 V/m; Power Drift = 0.041 dB
Peak SAR (extrapolated) = 76.9 W/kg
SAR(1 g) = 20 mW/g; SAR(10 g) = 5.77 mW/g
Maximum value of SAR (measured) = 38.2 mW/g

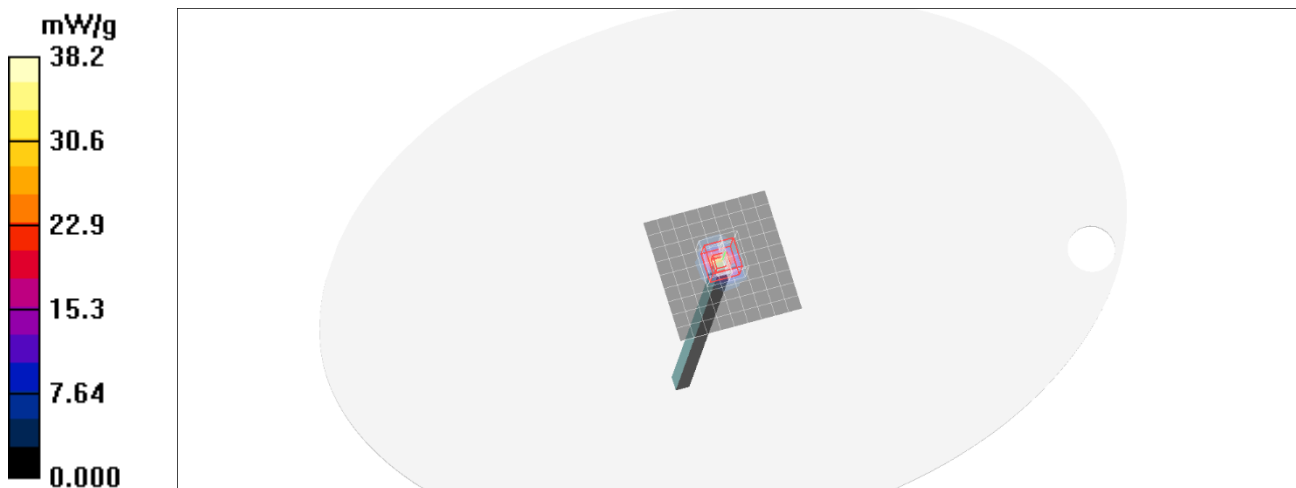

Date/Time: 2021-07-23 PM 1:23:04

Test Laboratory: Nemko Korea File Name: [System Verification for 5.2GHz_2021-07-23.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5200 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.54 \text{ mho/m}$; $\epsilon_r = 35.7$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(5.2, 5.2, 5.2); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.2GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 30.3 mW/g

5.2GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 95.3 V/m; Power Drift = 0.057 dB
Peak SAR (extrapolated) = 70.6 W/kg
SAR(1 g) = 19 mW/g; SAR(10 g) = 5.56 mW/g
Maximum value of SAR (measured) = 36.8 mW/g

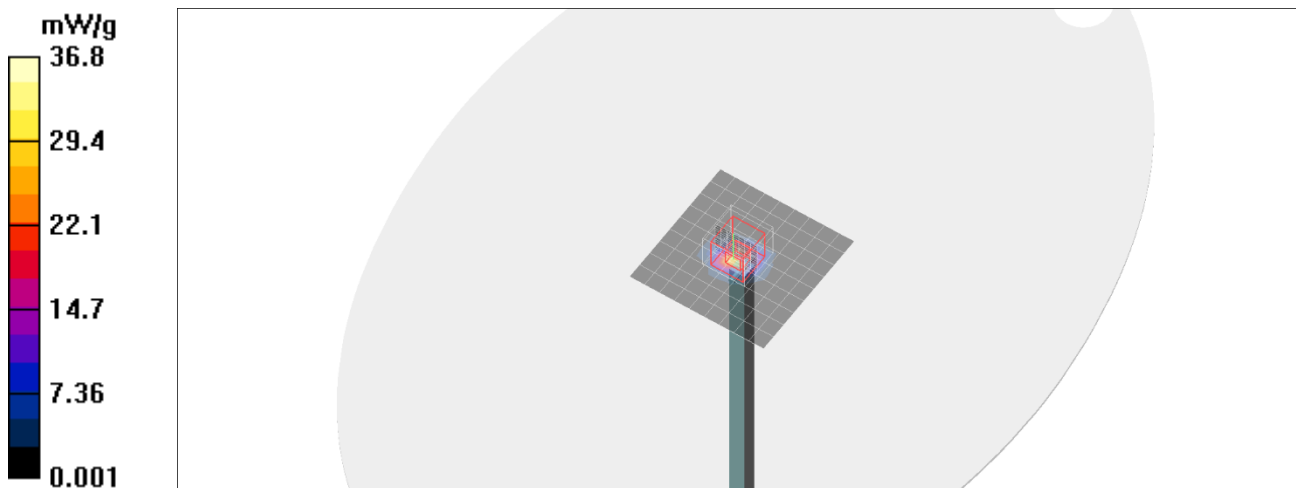

Date/Time: 2021-07-23 PM 2:02:52

Test Laboratory: Nemko Korea File Name: [System Verification for 5.3GHz_2021-07-23.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5300 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.64 \text{ mho/m}$; $\epsilon_r = 35.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(5.05, 5.05, 5.05); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.3GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 34.1 mW/g

5.3GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 93.9 V/m; Power Drift = 0.040 dB
Peak SAR (extrapolated) = 75.7 W/kg
SAR(1 g) = 19.7 mW/g; SAR(10 g) = 5.75 mW/g
Maximum value of SAR (measured) = 38.1 mW/g

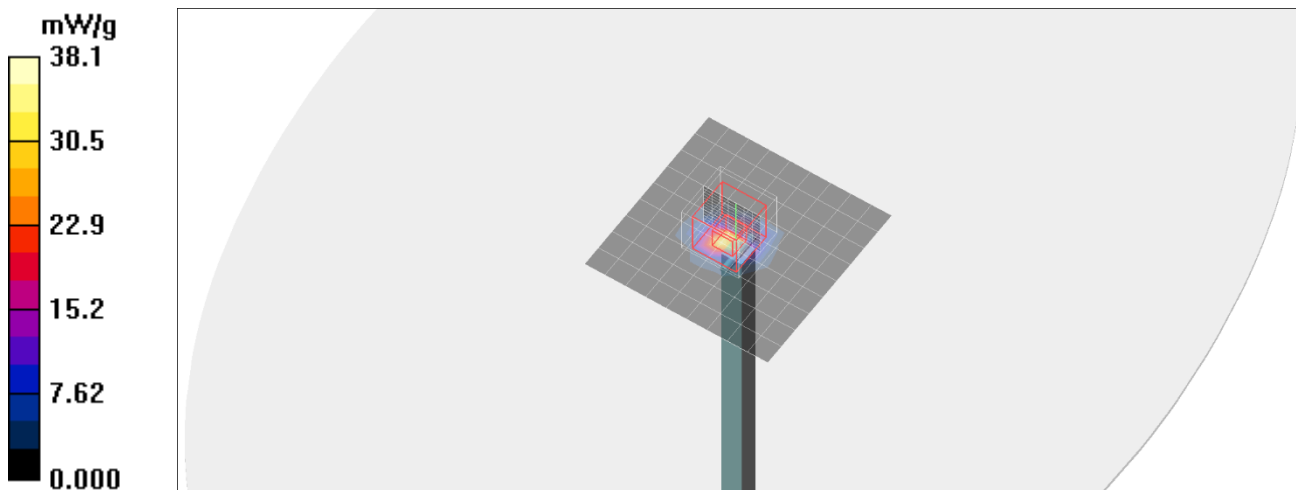

Date/Time: 2021-07-26 PM 1:48:06

Test Laboratory: Nemko Korea File Name: [System Verification for 5.5GHz_2021-07-26.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5500 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.91 \text{ mho/m}$; $\epsilon_r = 35.4$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(4.85, 4.85, 4.85); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.5GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 31.8 mW/g

5.5GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 86.0 V/m; Power Drift = 0.024 dB
Peak SAR (extrapolated) = 80.6 W/kg
SAR(1 g) = 20.4 mW/g; SAR(10 g) = 5.97 mW/g
Maximum value of SAR (measured) = 38.8 mW/g

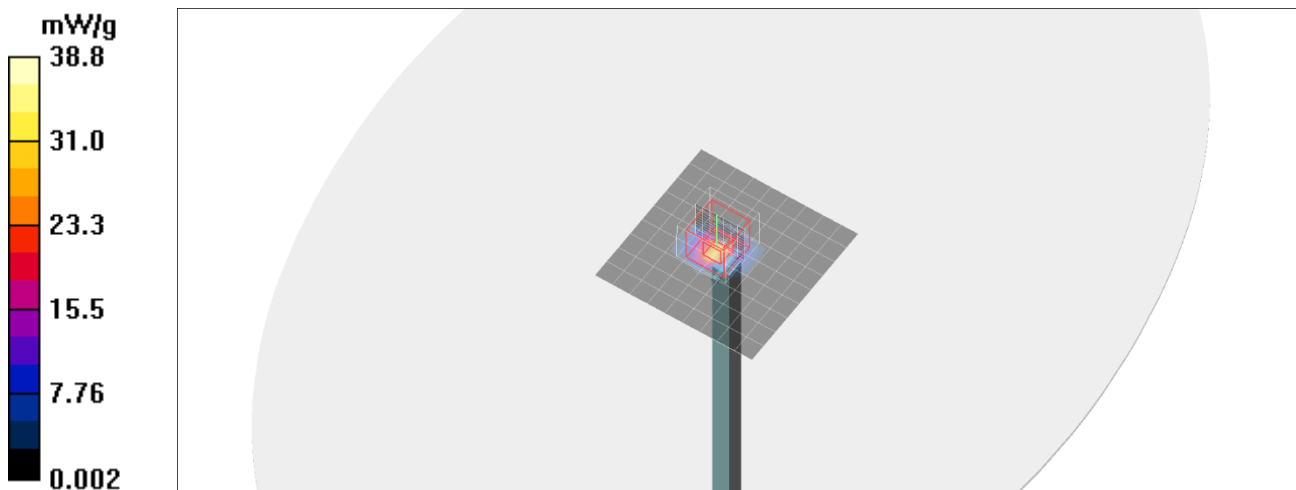

Date/Time: 2021-07-26 PM 3:05:16

Test Laboratory: Nemko Korea File Name: [System Verification for 5.6GHz_2021-07-26.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5600 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.03 \text{ mho/m}$; $\epsilon_r = 35.1$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(4.75, 4.75, 4.75); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.6GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 33.3 mW/g

5.6GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 84.2 V/m; Power Drift = 0.088 dB
Peak SAR (extrapolated) = 86.4 W/kg
SAR(1 g) = 20.8 mW/g; SAR(10 g) = 5.97 mW/g
Maximum value of SAR (measured) = 40.6 mW/g

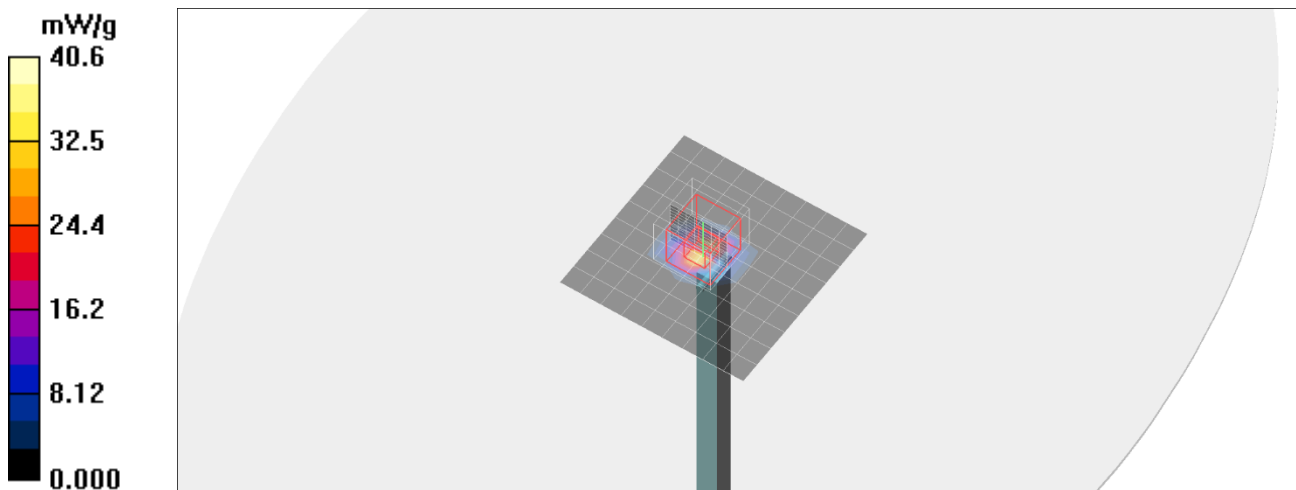

Date/Time: 2021-07-27 PM 2:01:13

Test Laboratory: Nemko Korea File Name: [System Verification for 5.6GHz_2021-07-27.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5600 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.05 \text{ mho/m}$; $\epsilon_r = 35.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(4.75, 4.75, 4.75); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.6GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 37.5 mW/g

5.6GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 91.6 V/m; Power Drift = 0.010 dB
Peak SAR (extrapolated) = 86.7 W/kg
SAR(1 g) = 21 mW/g; SAR(10 g) = 6.11 mW/g
Maximum value of SAR (measured) = 41.2 mW/g

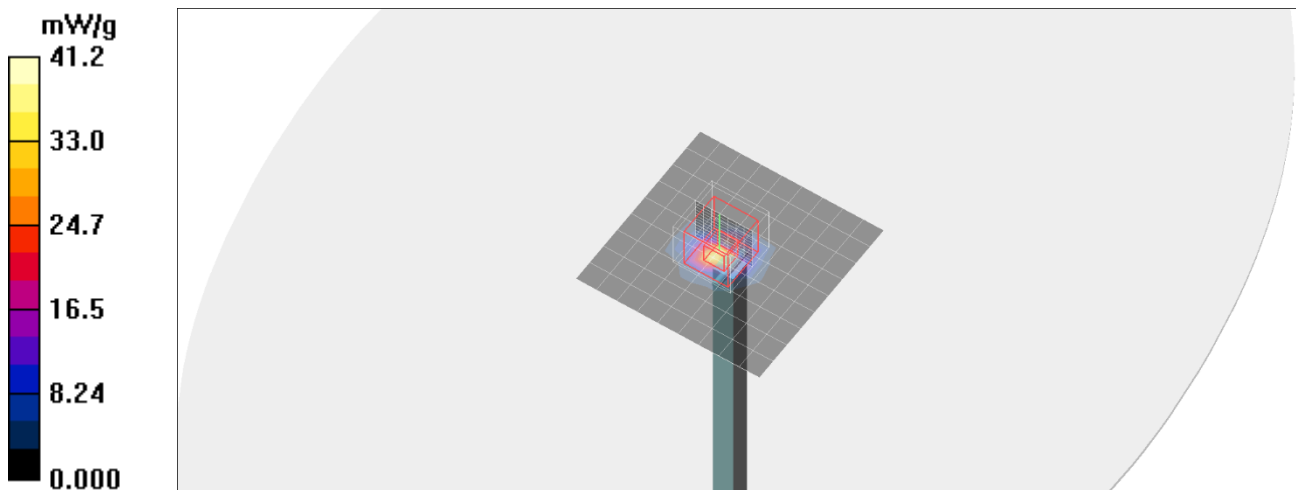

Date/Time: 2021-07-27 PM 2:46:42

Test Laboratory: Nemko Korea File Name: [System Verification for 5.8GHz 2021-07-27.da4](#)

DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5800 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.29 \text{ mho/m}$; $\epsilon_r = 35.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(4.6, 4.6, 4.6); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.8GHz System Validation/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 37.0 mW/g

5.8GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 88.1 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 89.5 W/kg

Peak SAR (extrapolated) = 89.5 W/kg

SAR(1 g) = 20.6 mW/g; SAR(10 g) = 5.93 mW/g

Maximum value of SAR (measured) = 39.9 mW/g

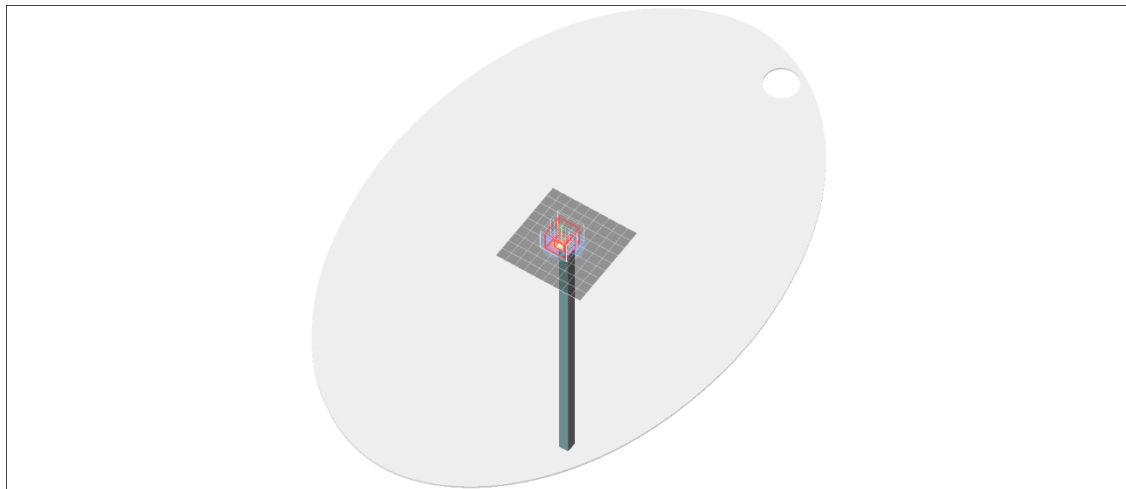

Date/Time: 2021-07-28 AM 11:35:42

Test Laboratory: Nemko Korea File Name: [System Verification for 5.8GHz_2021-07-28.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5800 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.18 \text{ mho/m}$; $\epsilon_r = 34.7$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(4.6, 4.6, 4.6); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.8GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 30.7 mW/g

5.8GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 91.3 V/m; Power Drift = 0.019 dB
Peak SAR (extrapolated) = 84.0 W/kg
SAR(1 g) = 19.7 mW/g; SAR(10 g) = 5.7 mW/g
Maximum value of SAR (measured) = 38.9 mW/g

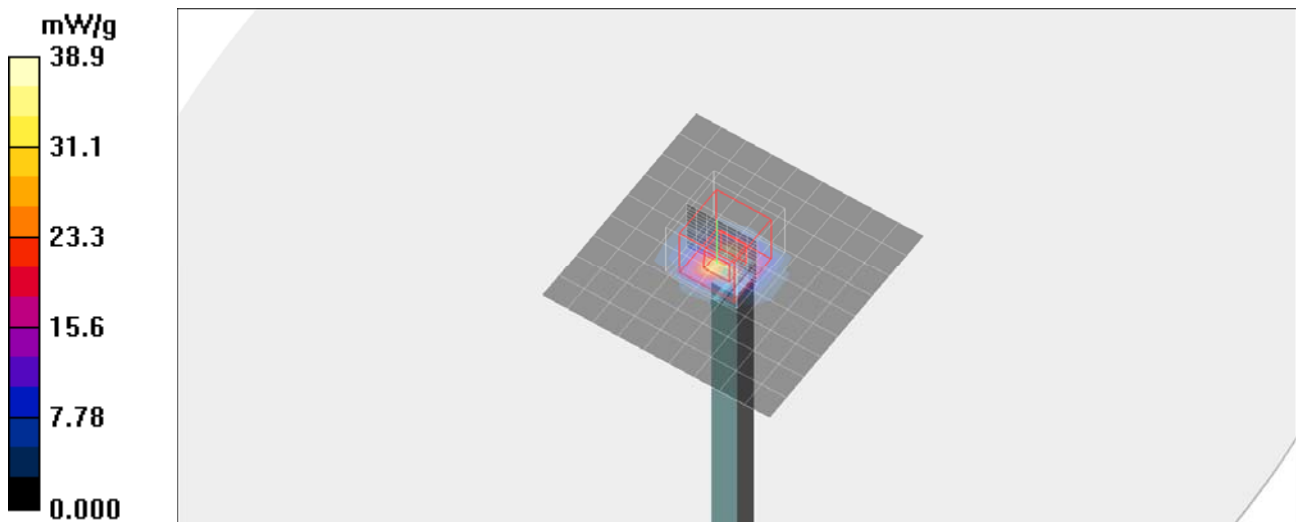

Date/Time: 2021-07-29 PM 3:28:00

Test Laboratory: Nemko Korea File Name: [System Verification for 5.2GHz_2021-07-29.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5200 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.52 \text{ mho/m}$; $\epsilon_r = 35.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(5.2, 5.2, 5.2); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.2GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 30.6 mW/g

5.2GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 96.0 V/m; Power Drift = -0.005 dB
Peak SAR (extrapolated) = 73.7 W/kg
SAR(1 g) = 19.8 mW/g; SAR(10 g) = 5.84 mW/g
Maximum value of SAR (measured) = 37.5 mW/g

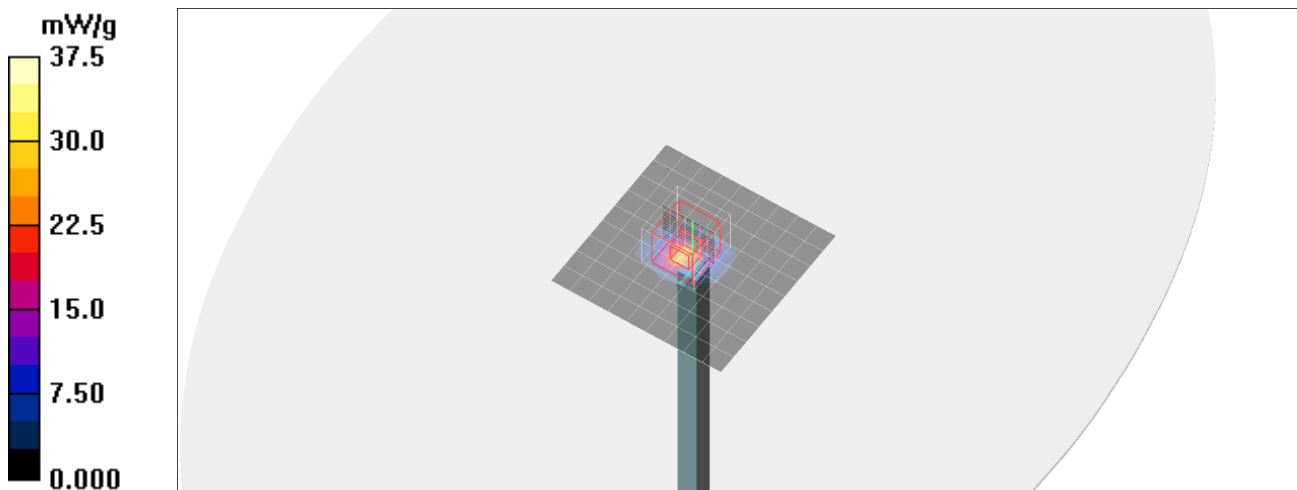

Date/Time: 2021-07-29 PM 4:43:47

Test Laboratory: Nemko Korea File Name: [System Verification for 5.3GHz_2021-07-29.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5300 MHz
 Duty Cycle: 1:1 Phantom section: Flat Section
 Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.67 \text{ mho/m}$; $\epsilon_r = 35.2$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
 Probe: EX3DV4 - SN3910; ConvF(5.05, 5.05, 5.05); Calibrated: 2020-08-14
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn672; Calibrated: 2020-09-18
 Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.3GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 29.4 mW/g

5.3GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 88.0 V/m; Power Drift = -0.053 dB
 Peak SAR (extrapolated) = 74.2 W/kg
SAR(1 g) = 19.4 mW/g; SAR(10 g) = 5.66 mW/g
 Maximum value of SAR (measured) = 37.6 mW/g

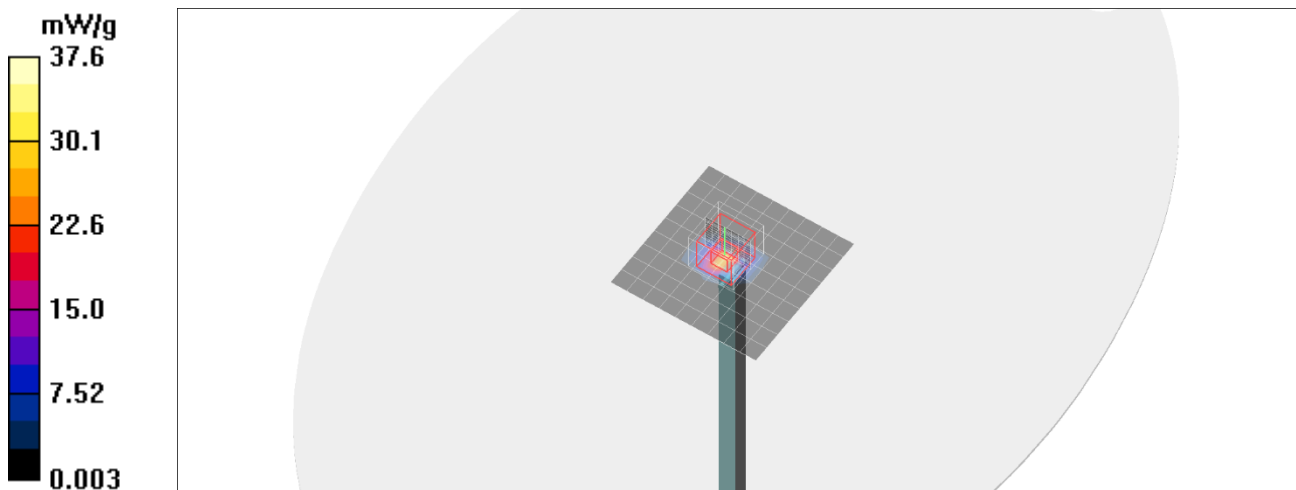

Date/Time: 2021-08-01 PM 3:13:18

Test Laboratory: Nemko Korea File Name: [System Verification for 5.2GHz_2021-08-01.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5200 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.58 \text{ mho/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(5.2, 5.2, 5.2); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.2GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 31.8 mW/g

5.2GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 97.7 V/m; Power Drift = -0.065 dB
Peak SAR (extrapolated) = 73.2 W/kg
SAR(1 g) = 19.6 mW/g; SAR(10 g) = 5.71 mW/g
Maximum value of SAR (measured) = 37.4 mW/g

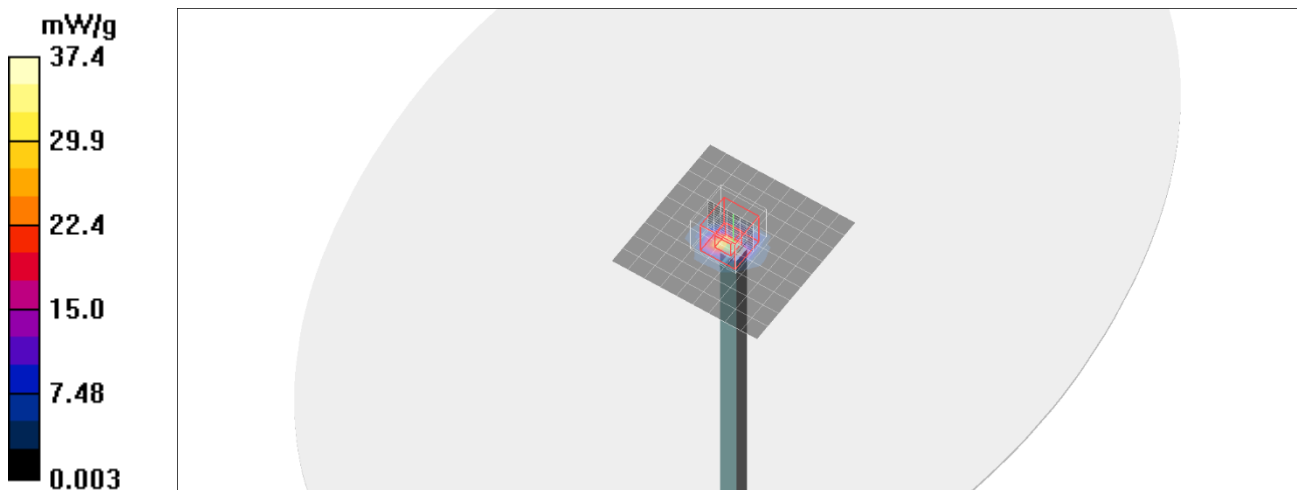

Date/Time: 2021-08-01 PM 3:58:31

Test Laboratory: Nemko Korea File Name: [System Verification for 5.3GHz_2021-08-01.da4](#)


DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5300 MHz
Duty Cycle: 1:1 Phantom section: Flat Section
Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.7 \text{ mho/m}$; $\epsilon_r = 36.2$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:
Probe: EX3DV4 - SN3910; ConvF(5.05, 5.05, 5.05); Calibrated: 2020-08-14
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn672; Calibrated: 2020-09-18
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.3GHz System Validation/Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 32.3 mW/g

5.3GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 96.2 V/m; Power Drift = -0.080 dB
Peak SAR (extrapolated) = 78.0 W/kg
SAR(1 g) = 20.1 mW/g; SAR(10 g) = 5.81 mW/g
Maximum value of SAR (measured) = 39.0 mW/g

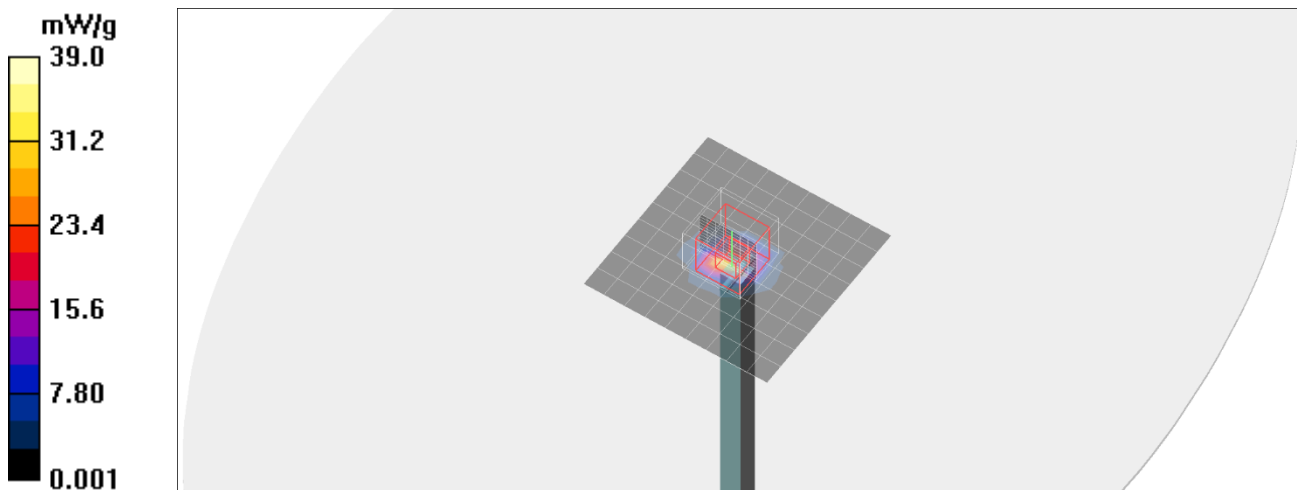

Date/Time: 2021-08-02 PM 5:28:27

Test Laboratory: Nemko Korea File Name: [System Verification for 5.8GHz 2021-08-02.da4](#)

DUT: Dipole 5 GHz Type: D5GHzV2 Serial: D5GHzV2 - SN:1146

Communication System: CW (5G) Frequency: 5800 MHz

Duty Cycle: 1:1 Phantom section: Flat Section

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.22 \text{ mho/m}$; $\epsilon_r = 34.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

Probe: EX3DV4 - SN3910; ConvF(4.6, 4.6, 4.6); Calibrated: 2020-08-14

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn672; Calibrated: 2020-09-18

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

5.8GHz System Validation/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 28.1 mW/g

5.8GHz System Validation/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 94.4 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 81.8 W/kg

Peak SAR (extrapolated) = 81.8 W/kg

SAR(1 g) = 19.9 mW/g; SAR(10 g) = 5.76 mW/g

Maximum value of SAR (measured) = 38.0 mW/g

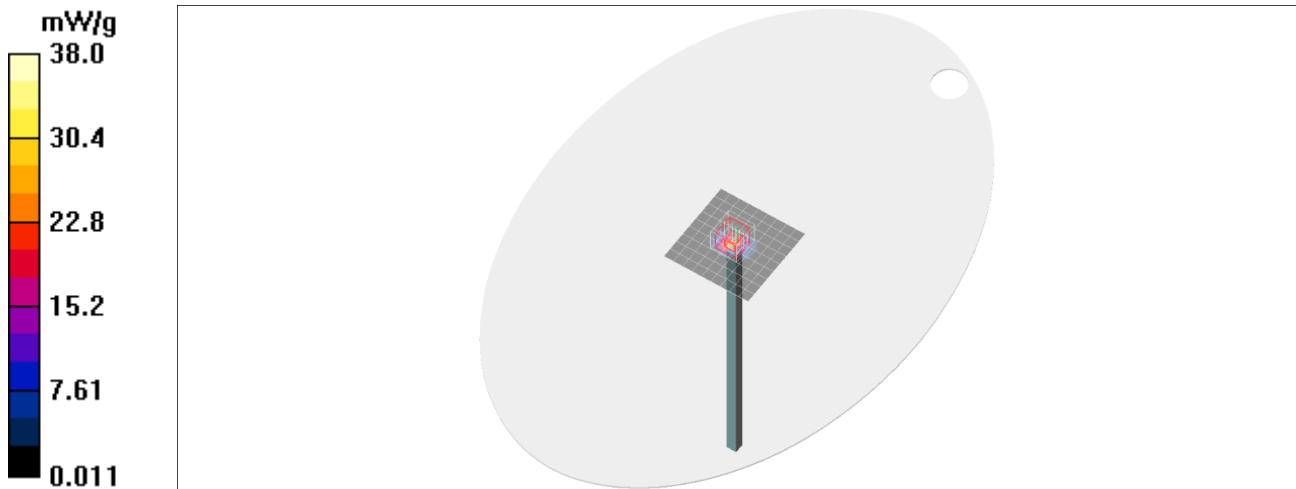

APPENDIX C. CALIBRATION REPORT OF THE PROBE

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Nemko (Dymstec)**

Certificate No: **EX3-3910_Aug20**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3910**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7
Calibration procedure for dosimetric E-field probes**



Calibration date: **August 14, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: CC2552 (20x)	31-Mar-20 (No. 217-03106)	Apr-21
DAE4	SN: 660	27-Dec-19 (No. DAE4-660_Dec19)	Dec-20
Reference Probe ES3DV2	SN: 3013	31-Dec-19 (No. ES3-3013_Dec19)	Dec-20
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

	Name	Function	Signature
Calibrated by:	Jeffrey Katzman	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 17, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3910

August 14, 2020

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3910

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.45	0.46	0.55	± 10.1 %
DCP (mV) ^B	103.1	99.1	100.1	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB/ μV	C	D dB	VR mV	Max dev.	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	131.2	± 3.0 %	± 4.7 %
		Y	0.0	0.0	1.0		135.0		
		Z	0.0	0.0	1.0		148.0		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3910

August 14, 2020

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3910

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	174.5
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.

EX3DV4- SN:3910

August 14, 2020

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3910

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	39.2	1.80	7.45	7.45	7.45	0.34	0.90	± 12.0 %
5200	36.0	4.66	5.20	5.20	5.20	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.05	5.05	5.05	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.85	4.85	4.85	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.75	4.75	4.75	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.60	4.60	4.60	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3910

August 14, 2020

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3910

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	52.7	1.95	7.52	7.52	7.52	0.32	0.90	± 12.0 %
5200	49.0	5.30	4.41	4.41	4.41	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.27	4.27	4.27	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.04	4.04	4.04	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.95	3.95	3.95	0.50	1.90	± 13.1 %
5800	48.2	6.00	3.98	3.98	3.98	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3910

August 14, 2020

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


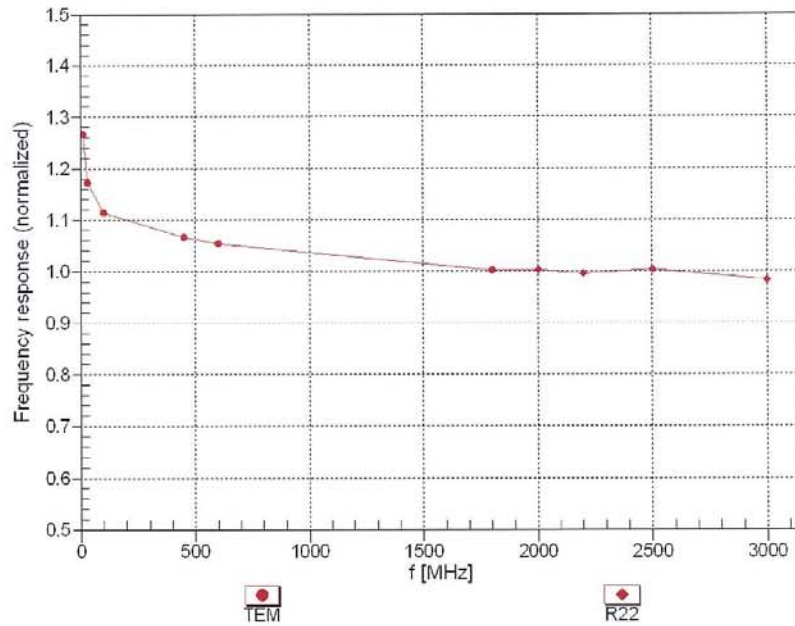


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4- SN:3910

August 14, 2020

Receiving Pattern (ϕ), $\theta = 0^\circ$

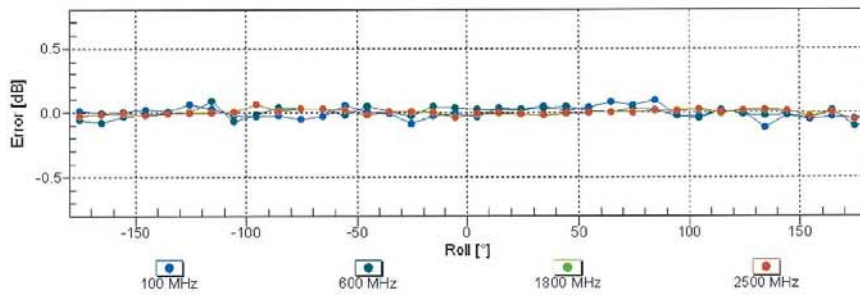
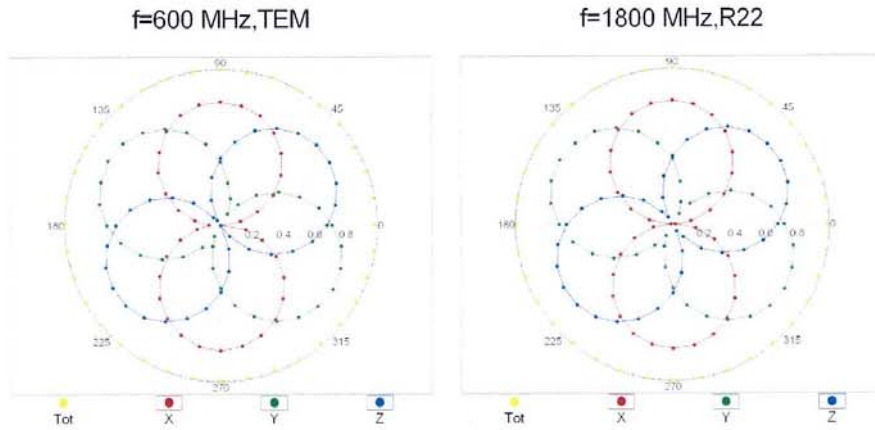


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4- SN:3910

August 14, 2020

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

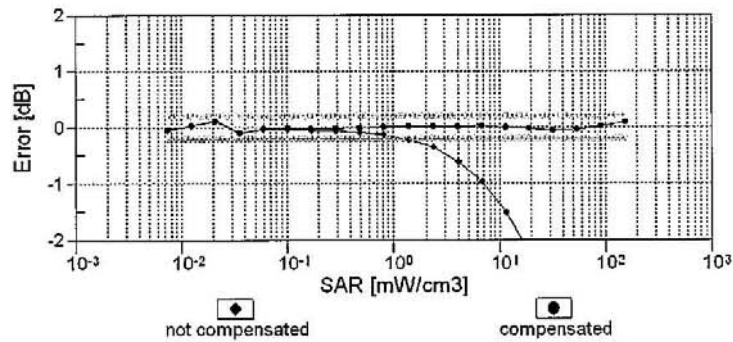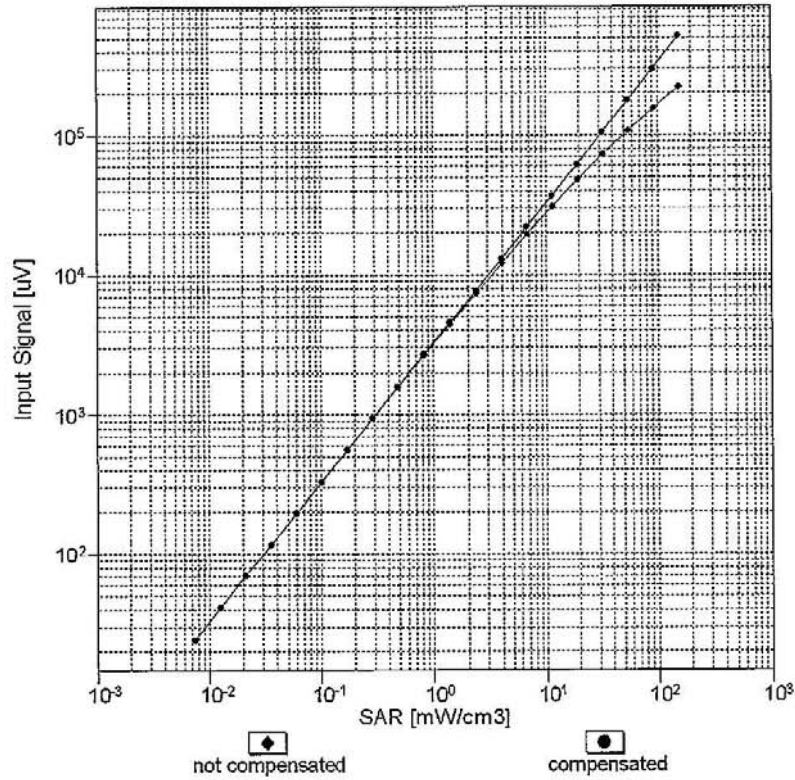


Uncertainty of Linearity Assessment: ± 0.6% (k=2)


EX3DV4– SN:3910

August 14, 2020

Conversion Factor Assessment

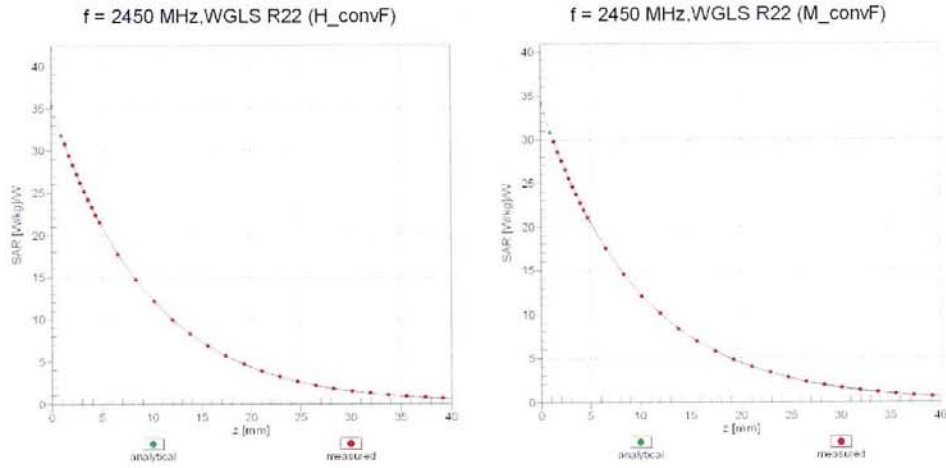

Deviation from Isotropy in Liquid Error (ϕ, θ), $f = 900$ MHz

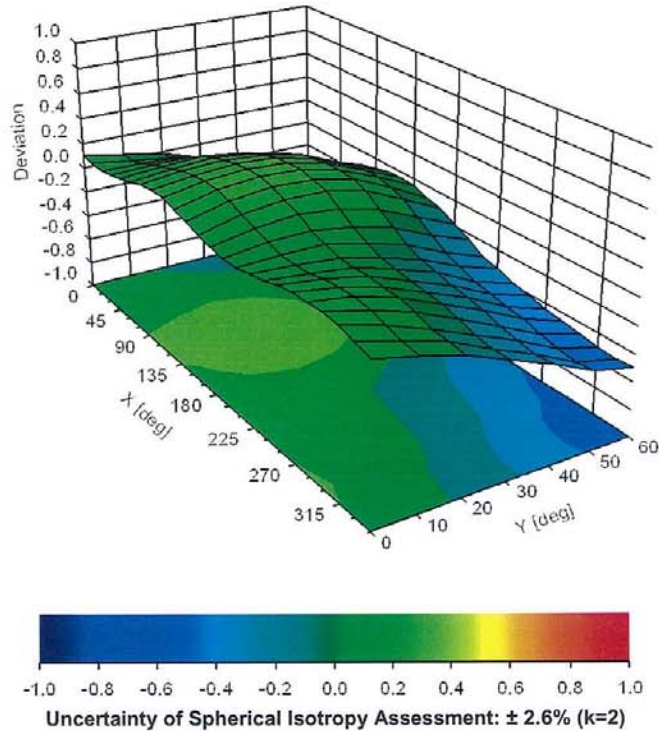

APPENDIX D. CALIBRATION REPORT OF THE DIPOLE ANTENNA

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Nemko (Dymstec)**

Certificate No: **D2450V2-774_Apr20**

CALIBRATION CERTIFICATE

Object	D2450V2 - SN:774		
Calibration procedure(s)	QA CAL-05.v11 Calibration Procedure for SAR Validation Sources between 0.7-3 GHz		
Calibration date:	April 20, 2020		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: BH9394 (20k)	31-Mar-20 (No. 217-03106)	Apr-21
Type-N mismatch combination	SN: 310982 / 06327	31-Mar-20 (No. 217-03104)	Apr-21
Reference Probe EX3DV4	SN: 7349	31-Dec-19 (No. EX3-7349_Dec19)	Dec-20
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20
Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: April 21, 2020
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.6 \pm 6 %	1.86 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.8 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.1 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	51.5 \pm 6 %	2.03 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.4 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.00 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.7 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.4 Ω + 4.8 j Ω
Return Loss	- 24.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.4 Ω + 6.7 j Ω
Return Loss	- 23.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 20.04.2020

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:774


Communication System: UID 0 - CW; Frequency: 2450 MHz
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.98, 7.98, 7.98) @ 2450 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)


Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 115.4 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 26.1 W/kg
SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.1 W/kg
 Smallest distance from peaks to all points 3 dB below = 9 mm
 Ratio of SAR at M2 to SAR at M1 = 50.7%
 Maximum value of SAR (measured) = 21.4 W/kg

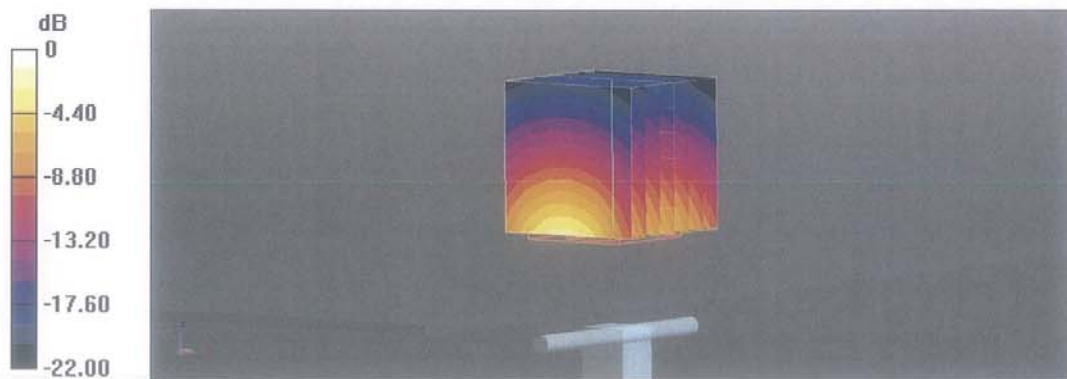

0 dB = 21.4 W/kg = 13.30 dBW/kg

Impedance Measurement Plot for Head TSL

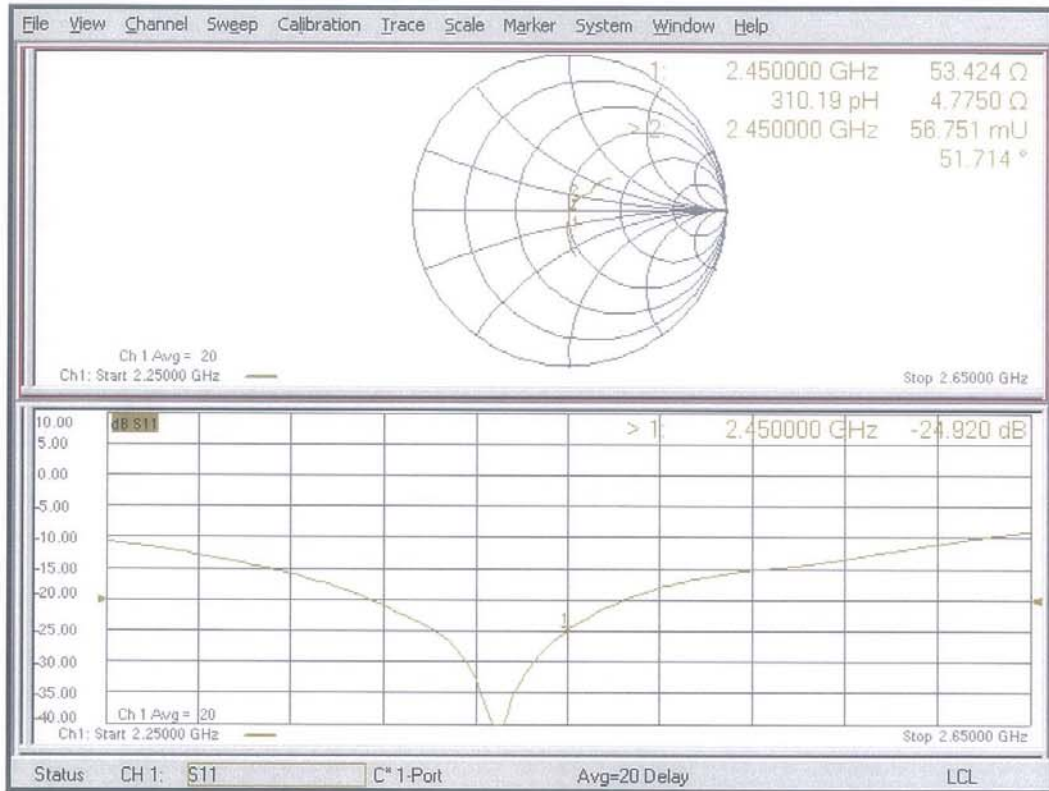

DASY5 Validation Report for Body TSL

Date: 20.04.2020

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:774

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.02, 8.02, 8.02) @ 2450 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.9 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 24.8 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm


Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 20.6 W/kg

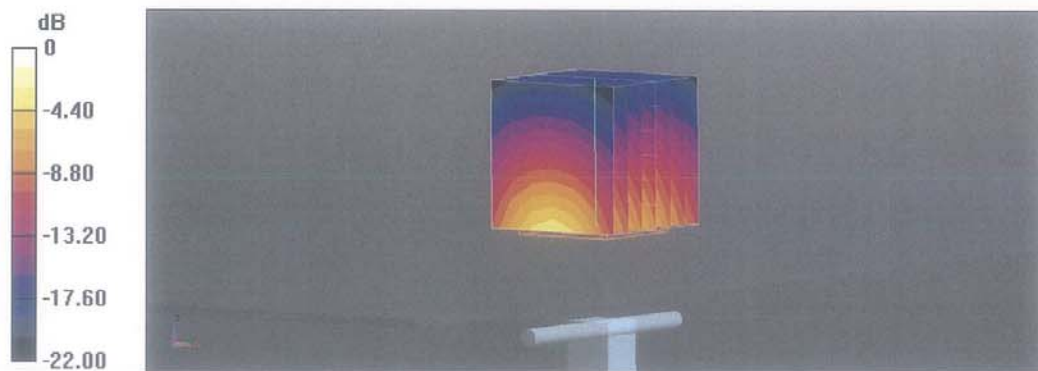

0 dB = 20.6 W/kg = 13.14 dBW/kg

Impedance Measurement Plot for Body TSL

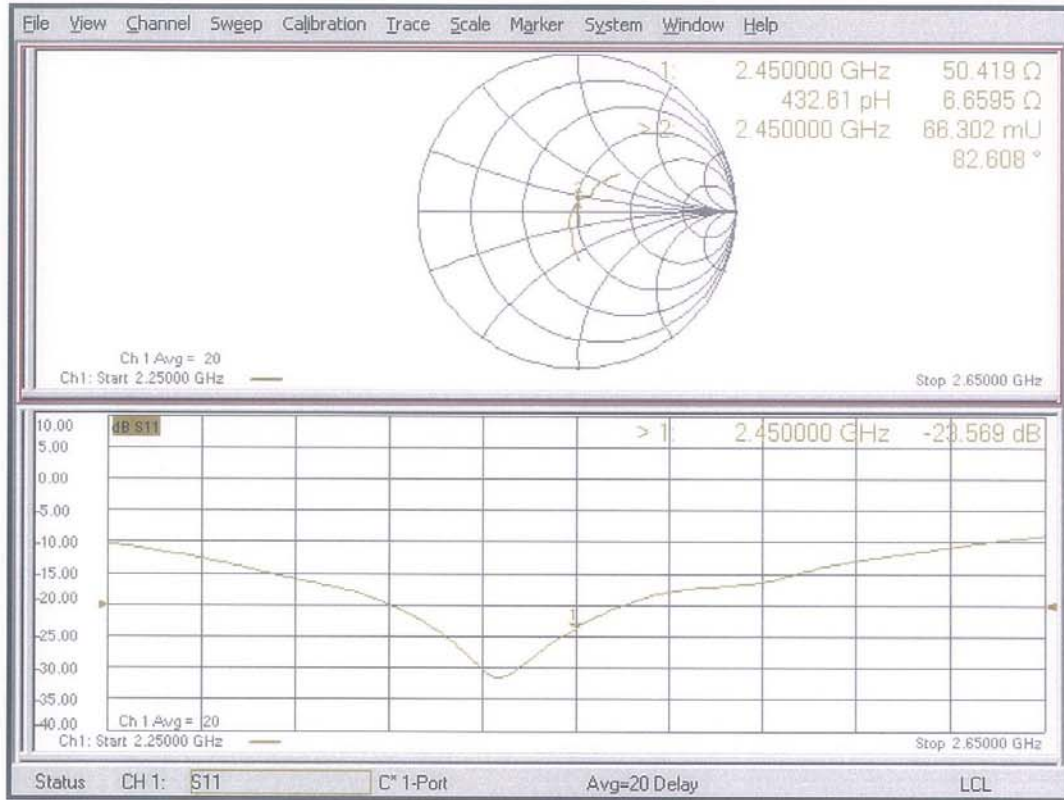

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Nemko (Dymstec)**

Certificate No: **D5GHzV2-1146_Jan21**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1146**

Calibration procedure(s) **QA CAL-22.v5
Calibration Procedure for SAR Validation Sources between 3-10 GHz**



Calibration date: **January 25, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: BH9394 (20k)	31-Mar-20 (No. 217-03106)	Apr-21
Type-N mismatch combination	SN: 310982 / 06327	31-Mar-20 (No. 217-03104)	Apr-21
Reference Probe EX3DV4	SN: 3503	30-Dec-20 (No. EX3-3503_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 26, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.1 ± 6 %	4.46 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.82 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.0 ± 6 %	4.56 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	4.76 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.46 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	84.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	4.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.46 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	5.07 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.4 ± 6 %	5.44 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.36 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.6 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.2 ± 6 %	5.57 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.48 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.9 ± 6 %	5.85 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.86 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.7 ± 6 %	5.99 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.77 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.3 ± 6 %	6.27 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.54 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.5 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	51.6 Ω - 8.0 j Ω
Return Loss	- 21.9 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	52.2 Ω - 5.9 j Ω
Return Loss	- 24.2 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	54.4 Ω - 4.6 j Ω
Return Loss	- 24.2 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	57.3 Ω - 0.1 j Ω
Return Loss	- 23.3 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	57.2 Ω - 1.6 j Ω
Return Loss	- 23.3 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	51.4 Ω - 6.4 j Ω
Return Loss	- 23.8 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	52.7 Ω - 4.2 j Ω
Return Loss	- 26.2 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	54.2 Ω - 2.4 j Ω
Return Loss	- 26.6 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	59.1 Ω + 1.4 j Ω
Return Loss	- 21.5 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	58.8 Ω - 0.3 j Ω
Return Loss	- 21.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 25.01.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1146

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.46$ S/m; $\epsilon_r = 35.1$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.56$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.07$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.8, 5.8, 5.8) @ 5200 MHz, ConvF(5.49, 5.49, 5.49) @ 5300 MHz, ConvF(5.25, 5.25, 5.25) @ 5500 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.01, 5.01, 5.01) @ 5800 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAB4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 76.85 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.22 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.3%

Maximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 77.67 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm


Ratio of SAR at M2 to SAR at M1 = 69.4%

Maximum value of SAR (measured) = 18.3 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 76.91 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 32.1 W/kg
SAR(1 g) = 8.46 W/kg; SAR(10 g) = 2.38 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 66.5%
 Maximum value of SAR (measured) = 19.7 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 78.52 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 31.1 W/kg
SAR(1 g) = 8.46 W/kg; SAR(10 g) = 2.39 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 67.6%
 Maximum value of SAR (measured) = 19.6 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 75.28 V/m; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 31.9 W/kg
SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.27 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 65.5%
 Maximum value of SAR (measured) = 19.4 W/kg

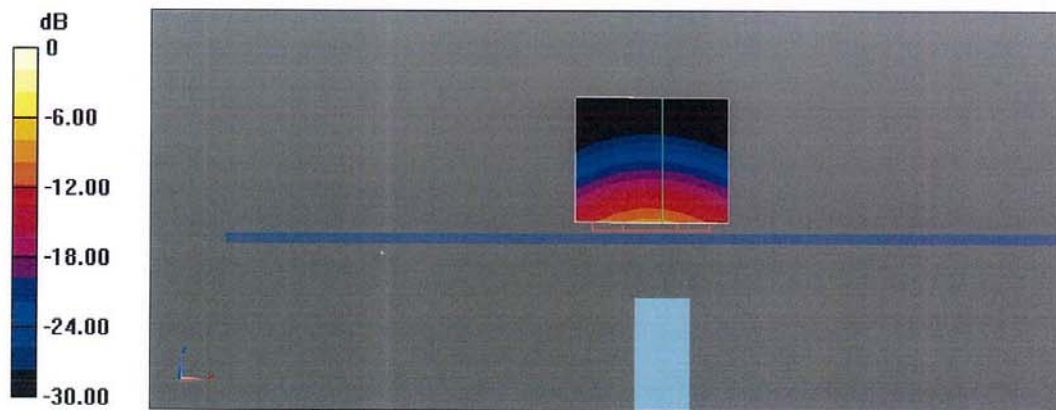

0 dB = 18.3 W/kg = 12.63 dBW/kg

Impedance Measurement Plot for Head TSL

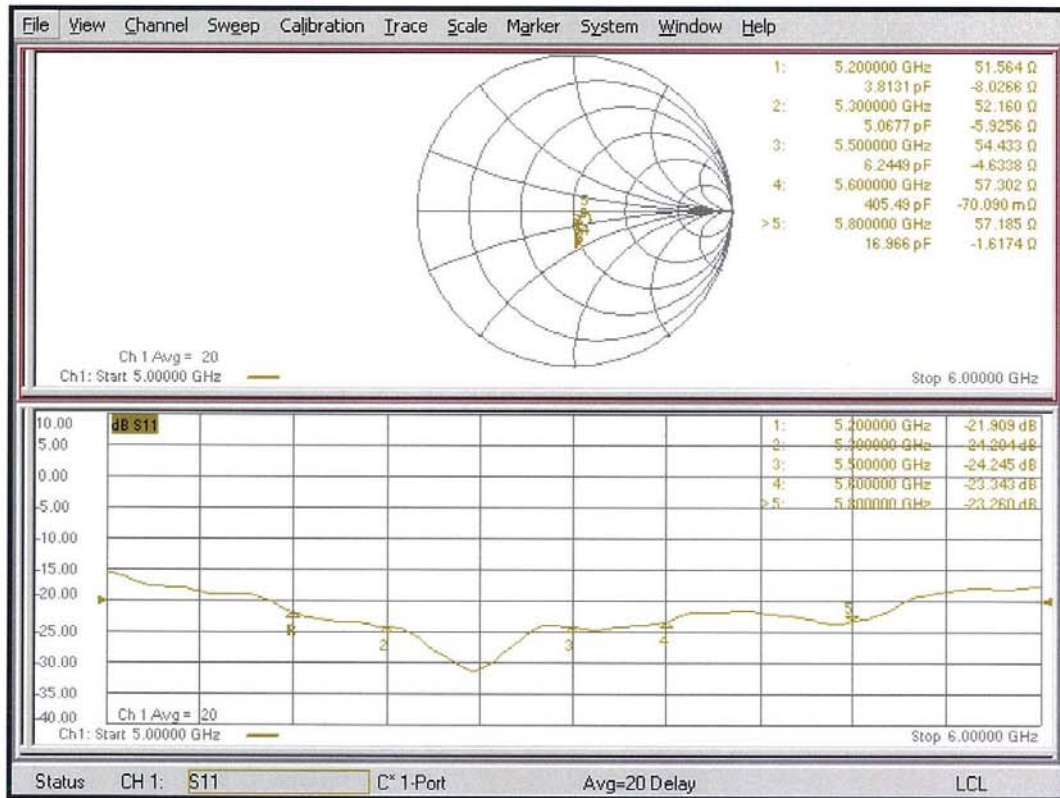

DASY5 Validation Report for Body TSL

Date: 20.01.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1146

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz,
Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 49.4$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.57$ S/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.85$ S/m; $\epsilon_r = 48.9$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.99$ S/m; $\epsilon_r = 48.7$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.27$ S/m; $\epsilon_r = 48.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.29, 5.29, 5.29) @ 5200 MHz, ConvF(5.23, 5.23, 5.23) @ 5300 MHz, ConvF(4.84, 4.84, 4.84) @ 5500 MHz, ConvF(4.79, 4.79, 4.79) @ 5600 MHz, ConvF(4.62, 4.62, 4.62) @ 5800 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.74 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 7.36 W/kg; SAR(10 g) = 2.05 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 68.1%

Maximum value of SAR (measured) = 16.8 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.65 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 7.48 W/kg; SAR(10 g) = 2.08 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm


Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 17.3 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 67.84 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 32.5 W/kg
SAR(1 g) = 7.86 W/kg; SAR(10 g) = 2.15 W/kg
 Smallest distance from peaks to all points 3 dB below = 6.8 mm
 Ratio of SAR at M2 to SAR at M1 = 64.9%
 Maximum value of SAR (measured) = 18.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 67.10 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 33.5 W/kg
SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.14 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 63.5%
 Maximum value of SAR (measured) = 18.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 65.51 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 32.7 W/kg
SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.05 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 63%
 Maximum value of SAR (measured) = 18.3 W/kg

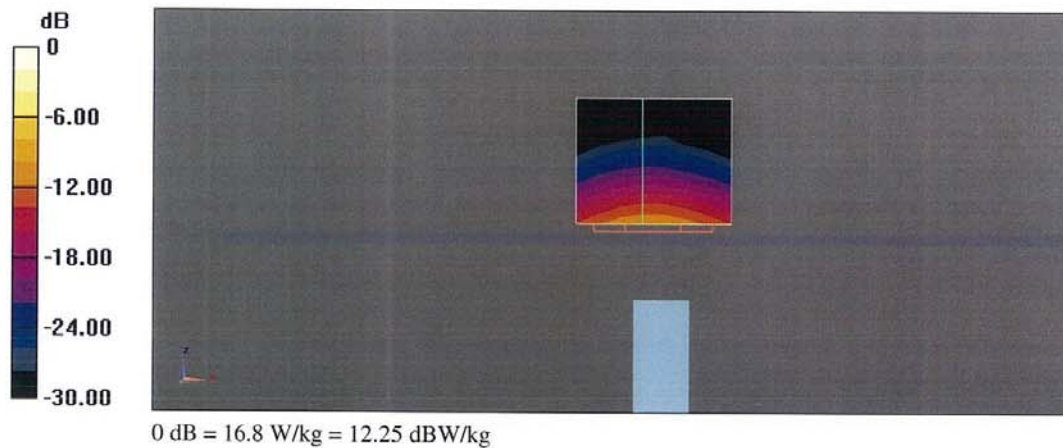

Impedance Measurement Plot for Body TSL

