

SPECIFICATIONS

PRODUCT NAME : WiFi Dual Band & BT Antenna

MODEL NAME : LGSBWAC95(LGE), ETWCFMBC01(LGIT) Ant.

The information contained herein is the exclusive property of LG Innotek and shall not be distributed, reproduced or disclosed in whole or no in part without prior written permission of LG Innotek.

Designed	Checked	Approved	LG Innotek Co., Ltd.	
Y.U.Jeong				
2020.05.15	-		DOCUMENT No.	2020RF-LGE002
			PAGE	9

REG. DATE : 2020.05.15

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2020.05.15

MODEL NAME : LGSBWAC95(LGE)
ETWCFMBC01(LGIT)

PAGE : 1 / 9

Change History of Revision

Revision	Date	Contents of Revision Change	Remark
1.0	2020.05.15	Wi-Fi & BT ANT Spec	Y.U.Jeong

REG. DATE : 2020.05.15

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2020.05.15

MODEL NAME : LGSBWAC95(LGE)
ETWCFMBC01(LGIT)

PAGE : 2 / 9

Table of Contents

No	Description	Page
1	ANT Features	3
2	Antenna Characteristics	3
	2.1 Network Data	5
	2.2 Efficiency	8
	2.3 Radiation Pattern	9
3	ANT Test Condition	9

REG. DATE : 2020.05.15

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2020.05.15

 MODEL NAME : LGSBWAC95(LGE)
 ETWCFMBC01(LGIT)

PAGE : 3 / 9

1. ANT Features

- Dual Bands Wi-Fi & BT ANT
- Main Frequency: 2.45GHz, 5.5GHz
- Frequency range
: From 2.40 to 2.50GHz, 5GHz~6GHz
- Operating temperature range
: -35 to +95°C (typ.)
- Wi-Fi ANT Material : Metal press + Printed of FR-4
- BT ANT material : Metal press

2. Antenna Characteristics

- Dual Band ANT1

Antenna Performance				
Parameter	Min	Typ	Max	Unit
Frequency Range	2400	2450	2500	MHz
	5000	5500	6000	MHz
Directivity	-	Omni	-	-
Full Bands Average Gain	-	-3.75	-	dBi
Full Bands Peak Gain		-	1.44	
V.S.W.R	3:1	-	-	Under
Isolation			-15	dB under
Impedance		50		Ohm
Radiation Material		Metal		

REG. DATE : 2020.05.15

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2020.05.15

 MODEL NAME : LGSBWAC95(LGE)
 ETWCFMBC01(LGIT)

PAGE : 4 / 9

- Dual Band ANT2

Antenna Performance				
Parameter	Min	Typ	Max	Unit
Frequency Range	2400	2450	2500	MHz
	5000	5500	6000	MHz
Directivity	-	Omni	-	-
Full Bands Average Gain	-	-3.32	-	dBi
Full Bands Peak Gain		-	1.5	
V.S.W.R	3:1	-	-	Under
Isolation			-15	dB under
Impedance		50		Ohm
Radiation Material		Metal		

- BT ANT

Antenna Performance				
Parameter	Min	Typ	Max	Unit
Frequency Range	2400	2450	2500	MHz
Directivity	-	Omni	-	-
Full Bands Average Gain	-	-3.38	-	dBi
Full Bands Peak Gain		-	1.19	
V.S.W.R	3:1	-	-	Under
Isolation			-25	dB under
Impedance		50		Ohm
Radiation Material		Printed		

REG. DATE : 2020.05.15

SPECIFICATION

REV.NO : 1.0


REV. DATE : 2020.05.15

 MODEL NAME : LGSBWAC95(LGE)
 ETWCFMBC01(LGIT)


PAGE : 5 / 9

2.1 Network Data

ANT 1_VSWR

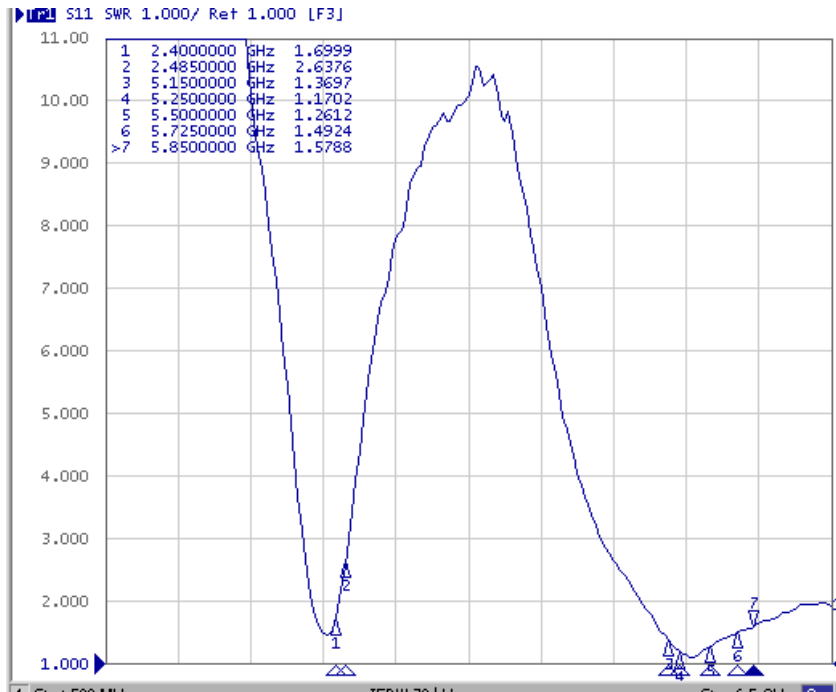

ANT 2_VSWR

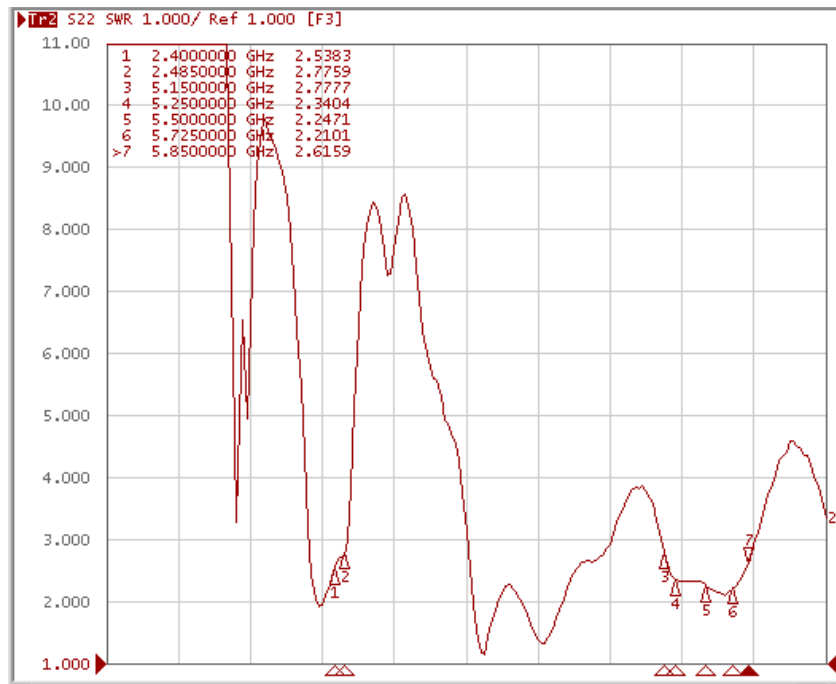

REG. DATE : 2020.05.15



SPECIFICATION

REV.NO : 1.0

REV. DATE : 2020.05.15

 MODEL NAME : LGSBWAC95(LGE)
 ETWCFMBC01(LGIT)

PAGE : 6 / 9

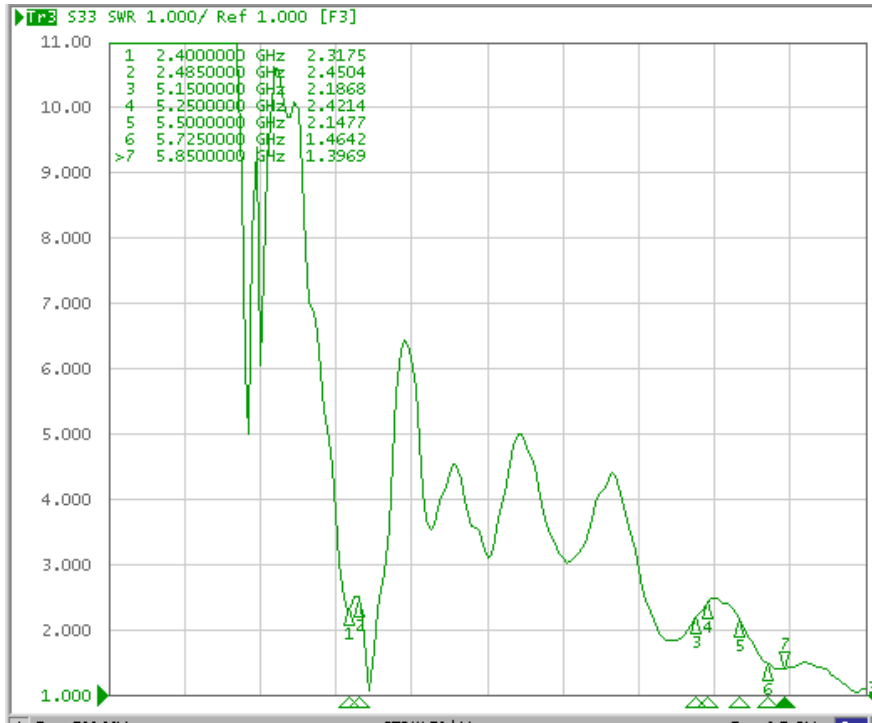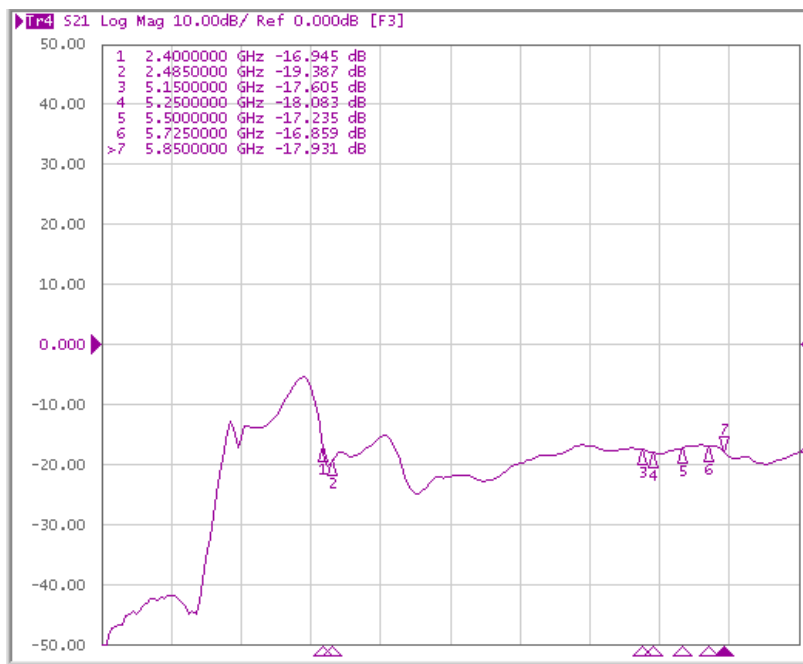BT_VSWR

ANT 1 <->ANT 2_Isolation


REG. DATE : 2020.05.15



SPECIFICATION

REV.NO : 1.0

REV. DATE : 2020.05.15

 MODEL NAME : LGSBWAC95(LGE)
 ETWCFMBC01(LGIT)

PAGE : 7 / 9

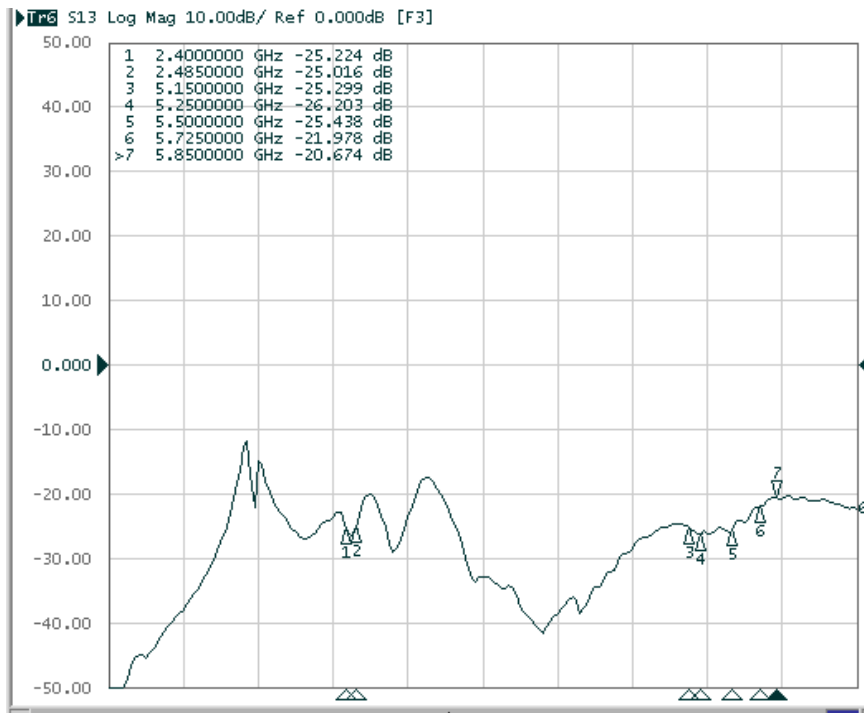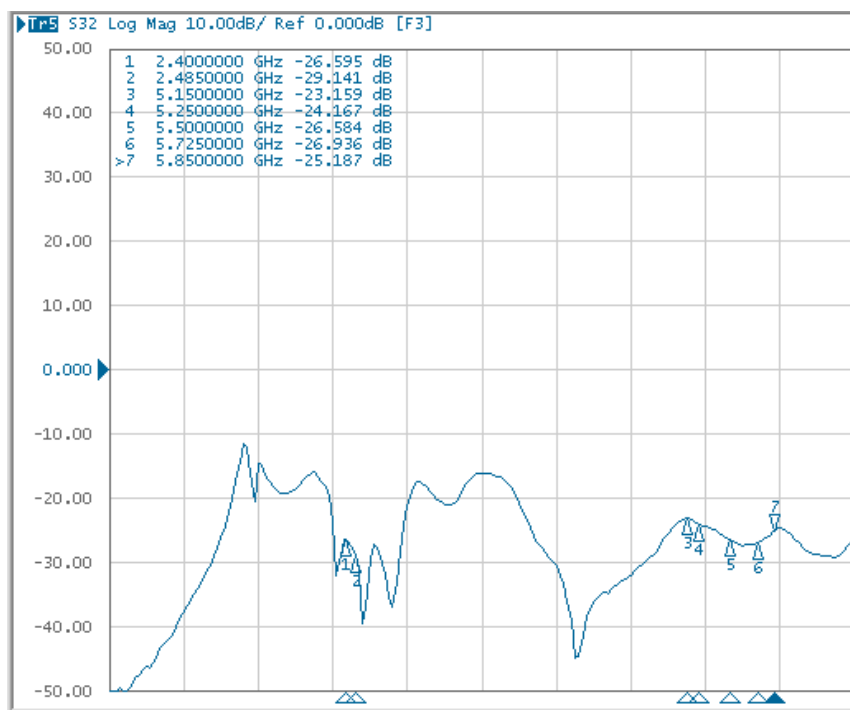ANT 1 <-> BT_Isolation

ANT 2 <-> BT_Isolation


REG. DATE : 2020.05.15

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2020.05.15

MODEL NAME : LGSBWAC95(LGE)
ETWCFMBC01(LGIT)

PAGE : 8 / 9

2.2. Efficiency

ANT1

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Frequency(MHz)	2412	2420	2450	2460	2485	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Efficiency(dB)	-6.92	-6.85	-7.03	-7.40	-7.55	-4.47	-5.18	-4.27	-3.23	-2.77	-2.05	-3.34	-3.25	-2.41	-2.23	-2.37	-3.74	-2.37	-2.66	-2.38
Efficiency(%)	20.33	20.63	19.82	18.20	17.60	35.69	30.37	37.41	47.52	52.81	62.37	46.32	47.33	57.36	59.79	57.92	42.30	57.98	54.23	57.80
TRG(dB)	-6.92	-6.85	-7.03	-7.40	-7.55	-4.47	-5.18	-4.27	-3.23	-2.77	-2.05	-3.34	-3.25	-2.41	-2.23	-2.37	-3.74	-2.37	-2.66	-2.38
TRG _{Total} (dB)	-9.63	-9.38	-9.97	-9.22	-9.70	-6.51	-6.94	-5.92	-4.71	-4.17	-3.18	-4.40	-4.35	-3.53	-3.36	-3.42	-4.78	-3.42	-3.68	-3.47
TRG _{Phi} (dB)	-10.25	-10.40	-11.46	-12.06	-11.63	-8.75	-9.95	-9.26	-8.63	-8.38	-8.44	-9.98	-9.73	-8.85	-8.66	-9.05	-10.45	-9.04	-9.43	-8.92
UHRG(dB)	-10.69	-10.55	-10.64	-11.28	-12.27	-6.97	-7.63	-6.64	-5.63	-5.46	-4.97	-5.95	-5.64	-4.66	-4.37	-4.39	-5.72	-4.39	-4.66	-4.36
UHRG/TRG(%)	42.01	42.72	43.50	40.93	33.73	56.25	56.80	57.99	57.54	53.82	51.02	54.92	57.59	59.55	61.11	62.81	63.31	62.73	63.05	63.38
H-Plane	-9.54	-8.92	-8.11	-8.63	-9.81	-4.90	-5.15	-3.91	-2.34	-2.25	-2.10	-2.90	-3.04	-2.42	-2.10	-2.33	-3.61	-2.28	-2.41	-2.05
E1-Plane, AVG(dB)	-12.97	-12.55	-11.06	-10.72	-9.99	-6.72	-7.51	-6.48	-5.58	-4.95	-3.42	-4.87	-4.87	-3.98	-3.71	-3.80	-5.40	-3.63	-3.85	-3.69
E2-Plane, AVG(dB)	-7.73	-7.64	-8.17	-8.87	-9.97	-8.39	-8.94	-7.82	-6.73	-6.04	-6.00	-6.65	-6.37	-5.47	-5.06	-5.12	-6.11	-5.31	-4.78	-5.12
Peak Gain(dB)	-1.44	-1.67	-1.26	-1.19	-0.94	0.05	-0.75	-0.14	0.96	0.98	1.27	0.50	0.31	1.25	1.13	1.41	0.07	1.40	1.44	1.44
Directivity(dB)	5.48	5.18	5.77	6.21	6.60	4.52	4.42	4.13	4.19	3.75	3.32	3.84	3.56	3.66	3.37	3.78	3.80	3.77	4.10	3.82
Minimum Gain(dB)	-20.68	-19.92	-19.98	-17.33	-16.24	-15.16	-16.43	-17.22	-17.59	-16.62	-12.57	-16.32	-13.84	-12.95	-12.27	-13.68	-23.10	-24.85	-19.80	-18.18
Test Condition	FS																			
Antenna Type																				
Average Efficiency	-3.75 dB, 42.19 %																			

ANT2

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Frequency(MHz)	2412	2420	2450	2460	2485	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Efficiency(dB)	-3.54	-3.27	-2.86	-2.81	-3.09	-2.56	-2.95	-2.71	-3.29	-2.96	-3.69	-4.27	-2.84	-3.26	-3.63	-3.92	-4.32	-3.20	-4.04	-3.73
Efficiency(%)	44.27	47.04	51.82	52.31	49.11	55.46	50.73	53.63	46.84	50.56	42.73	37.42	51.98	47.23	43.39	40.51	36.98	47.85	39.41	42.38
TRG(dB)	-3.54	-3.27	-2.86	-2.81	-3.09	-2.56	-2.95	-2.71	-3.29	-2.96	-3.69	-4.27	-2.84	-3.26	-3.63	-3.92	-4.32	-3.20	-4.04	-3.73
TRG _{Total} (dB)	-5.75	-5.55	-5.10	-4.98	-5.32	-4.56	-4.71	-4.29	-4.73	-4.49	-5.12	-5.66	-4.22	-4.56	-4.73	-4.93	-5.43	-4.26	-5.05	-4.75
TRG _{Phi} (dB)	-7.52	-7.17	-6.79	-6.87	-7.05	-6.89	-7.72	-7.86	-8.79	-8.25	-9.22	-9.89	-8.49	-9.13	-10.10	-10.78	-10.80	-9.86	-10.89	-10.51
UHRG(dB)	-6.63	-6.32	-5.88	-5.84	-6.02	-5.97	-6.06	-5.63	-6.21	-5.84	-6.53	-7.04	-5.72	-6.22	-6.85	-7.67	-6.42	-7.29	-7.78	-7.12
UHRG/TRG(%)	49.06	49.62	49.81	49.78	50.90	45.61	48.79	50.96	51.08	51.51	52.06	52.81	51.59	50.60	47.65	42.23	38.90	38.98	42.27	45.79
H-Plane	-3.95	-3.71	-3.24	-3.18	-4.02	-5.17	-5.50	-4.94	-4.23	-4.94	-5.79	-5.93	-6.28	-6.55	-4.36	-4.12	-4.04	-3.71	-4.36	-4.23
E1-Plane, AVG(dB)	-8.57	-8.40	-7.67	-7.47	-7.88	-4.42	-4.70	-4.23	-4.56	-4.47	-4.99	-5.18	-3.71	-3.97	-4.19	-4.35	-4.68	-3.44	-4.78	-4.64
E2-Plane, AVG(dB)	-6.89	-6.55	-5.65	-5.50	-6.18	-3.85	-4.15	-3.75	-4.45	-4.17	-5.30	-5.98	-4.76	-5.12	-5.55	-6.06	-6.42	-5.14	-6.00	-5.53
Peak Gain(dB)	1.26	1.35	1.33	1.46	1.50	1.42	1.23	1.15	1.20	1.45	1.47	0.32	1.37	0.54	0.37	0.19	0.35	1.42	0.92	1.23
Directivity(dB)	4.80	4.62	4.18	4.27	4.58	3.98	4.18	3.86	4.49	4.41	5.16	4.59	4.21	3.80	4.00	4.12	4.67	4.62	4.96	4.96
Minimum Gain(dB)	-14.40	-13.27	-14.20	-13.52	-12.65	-11.88	-12.06	-11.60	-12.79	-11.95	-12.06	-14.24	-10.82	-11.09	-13.51	-15.31	-15.88	-18.61	-19.82	-17.33
Test Condition	FS																			
Antenna Type																				
Average Efficiency	-3.32 dB, 46.58 %																			

BT

	1	2	3	4	5
Frequency(MHz)	2412	2420	2450	2460	2485
Efficiency(dB)	-3.69	-3.45	-3.15	-3.18	-3.47
Efficiency(%)	42.77	45.19	48.43	48.12	45.01
TRG(dB)	-3.69	-3.45	-3.15	-3.18	-3.47
TRG _{Total} (dB)	-7.80	-7.60	-7.34	-7.34	-7.37
TRG _{Phi} (dB)	-5.82	-5.56	-5.23	-5.28	-5.73
UHRG(dB)	-7.81	-7.52	-7.08	-7.08	-7.47
UHRG/TRG(%)	38.68	39.14	40.49	40.75	39.78
H-Plane	-9.27	-8.89	-8.01	-7.81	-7.99
E1-Plane, AVG(dB)	-11.31	-10.69	-8.98	-8.57	-8.08
E2-Plane, AVG(dB)	-4.66	-4.59	-4.69	-5.39	-5.39
Peak Gain(dB)	0.67	0.89	0.97	1.19	1.08
Directivity(dB)	4.36	4.34	4.12	4.37	4.55
Minimum Gain(dB)	-9.64	-9.45	-9.21	-8.92	-12.01
Test Condition	FS				
Antenna Type					
Average Efficiency	-3.38 dB, 45.90 %				

REG. DATE : 2020.05.15

SPECIFICATION

REV.NO : 1.0


REV. DATE : 2020.05.15

MODEL NAME : LGSBWAC95(LGE)
ETWCFMBC01(LGIT)


PAGE : 9 / 9

2.3. Radiation Pattern

ANT1




<2.45GHz>




<5.50GHz>

ANT2




<2.45GHz>



<5.50GHz>

BT



<2.45GHz>

3. ANT Test Condition

CTIA-OTA Test Chamber : 3x6x3m

