

TEST REPORT

FCC DTS Test for LGSBWAC95
Class II Permissive Change

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2407-FC003

DATE OF ISSUE
July 5, 2024

Tested by
Kyung Jun Woo



Technical Manager
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.
HCT-RF-2407-FC003

DATE OF ISSUE
July 05, 2024

Applicant

LG Electronics Inc.

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 17709, Republic of Korea

Product Name
Model Name

RF Module
LGSBWAC95

FCC ID

BEJLGSBWAC95

Date of Test

April 25, 2024 ~ July 05, 2024

Max. RF Output Power

SISO(Ant.1) : 22.61 dBm
SISO(Ant.2) : 22.97 dBm
MIMO_CDD (Ant.1+ Ant.2) : 25.80 dBm

Modulation type

CCK/DSSS/OFDM

FCC Classification

Digital Transmission System(DTS)

Test Standard Used

FCC Rule Part(s): Part 15.247

Test Results

PASS

Location of Test

Permanent Testing Lab On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 05, 2024	Initial Release

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

This test report provides test result(s) under the scope accredited by the Korea Laboratory Accreditation Scheme (KOLAS), which signed the ILAC-MRA.
(KOLAS (KS Q ISO/IEC 17025) Accreditation No. KT197)

This test report provides test result(s) under the lab's valid Scope of Accreditation by A2LA (American Association for Laboratory Accreditation), signatory of the ILAC-MRA.
(A2LA (ISO/IEC 17025) Certificate No. 4114.01)

CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION	8
4. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
5. ANTENNA REQUIREMENTS	9
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	24
9. TEST RESULT	25
9.1 OUTPUT POWER	25
9.2 POWER SPECTRAL DENSITY	27
9.3 RADIATED SPURIOUS EMISSIONS	30
9.4 RADIATED RESTRICTED BAND EDGES	33
10. LIST OF TEST EQUIPMENT	35
11. ANNEX A_ TEST SETUP PHOTO	37

1. EUT DESCRIPTION

Model	LGSBWAC95				
Additional Model	-				
EUT Type	RF Module				
Power Supply	DC 3.30 V				
Frequency Range	2 412 MHz – 2 472 MHz				
Max. RF Output Power	Peak Power	Ant. 1 (SISO)	802.11b : 802.11g : 802.11n(HT20) : 802.11n(HT40) :	19.65 dBm 22.60 dBm 22.61 dBm 22.18 dBm	
		Ant. 2 (SISO)	802.11b : 802.11g : 802.11n(HT20) : 802.11n(HT40) :	19.85 dBm 22.91 dBm 22.97 dBm 22.40 dBm	
		MIMO_CDD (Ant1+Ant2)	802.11b : 802.11g : 802.11n(HT20) : 802.11n(HT40) :	22.76 dBm 25.73 dBm 25.80 dBm 25.30 dBm	
	Average Power	Ant. 1 (SISO)	802.11b : 802.11g : 802.11n(HT20) : 802.11n(HT40) :	13.58 dBm 14.52 dBm 14.35 dBm 13.52 dBm	
		Ant. 2 (SISO)	802.11b : 802.11g : 802.11n(HT20) : 802.11n(HT40) :	13.83 dBm 14.21 dBm 14.29 dBm 13.47 dBm	
		MIMO_CDD (Ant1+Ant2)	802.11b : 802.11g : 802.11n(HT20) : 802.11n(HT40) :	16.72 dBm 17.29 dBm 17.33 dBm 16.37 dBm	
	Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n			
	Number of Channels	13 Channels			
	Antenna type	Metal press Ant			
Date(s) of Tests	April 25, 2024 ~ July 05, 2024				
EUT serial numbers	Conducted : D48660BEE1D0 Radiated : 0409860B546C				

ANTENNA CONFIGURATIONS

Configurations	SISO		MIMO	
	Ant1	Ant2	CDD	SDM
802.11b	O	O	O	X
802.11g	O	O	O	X
802.11n(HT20)	O	O	O	O
802.11n(HT40)	O	O	O	O

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Ant Gain (dBi)		N _{ANT} / N _{SS}	Directional Gain (dBi)	
			CDD	SDM
ANT.1	-0.94	2 / 2	3.38	1.50
ANT.2	1.50			

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional Gain} = 10 \cdot \log \left(\frac{(10^{(ANT1 \text{ Gain}/20)} + 10^{(ANT2 \text{ Gain}/20)})^2}{2} \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{ANT} / N_{SS}),$$

Sample Calculation (Conducted Power, MIMO):

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

Conducted Power = (15.35 dBm + 15.12 dBm) = (34.276 mW + 32.508 mW) = 66.784 mW = 18.25 dBm

E.I.R.P = 18.25 dBm + 3 dBi = 21.25 dBm

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES**Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10.

(Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4.

(Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

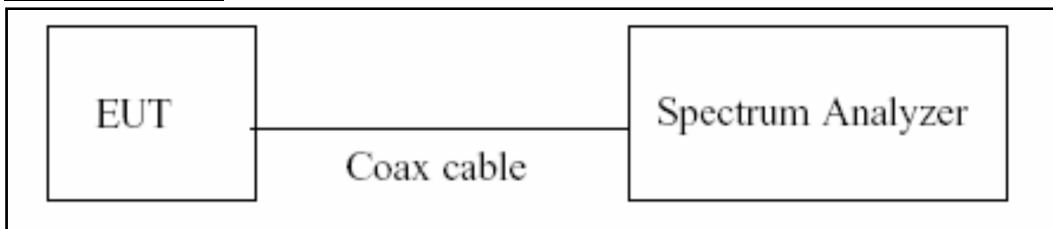

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz or 50 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Average
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the DTS bandwidth.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple.
- 6) Detector = Peak.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.12
100	10.16
200	10.23
300	10.31
400	10.35
500	10.40
600	10.45
700	10.46
800	10.52
900	10.52
1000	10.54
2000	10.62
2400	10.74
2500	10.74
3000	10.98
4000	11.21
5000	11.82
6000	11.82
7000	11.98
8000	11.97
9000	12.16
10000	12.28
11000	12.41
12000	12.55
13000	12.64
14000	12.76
15000	12.84
16000	12.95
17000	13.07
18000	13.09
19000	13.08
20000	13.13
21000	13.16
22000	13.23
23000	13.39
24000	13.40
25000	13.42
26000	13.48

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

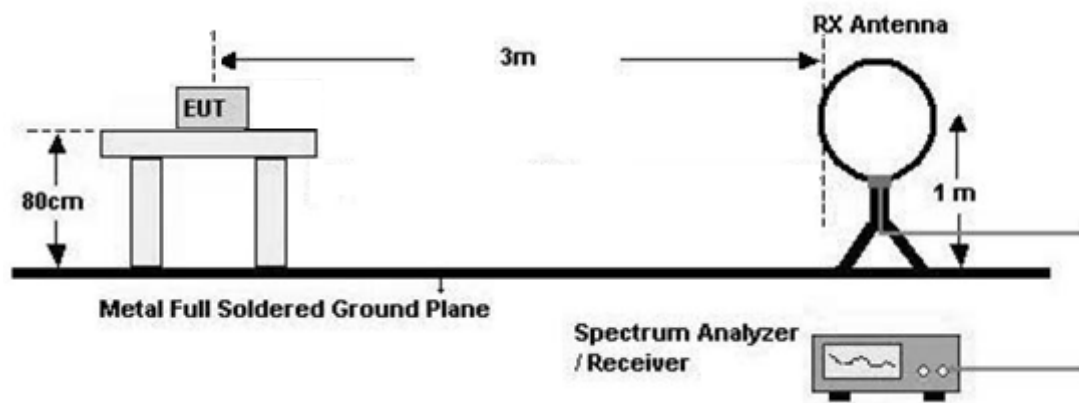

30 MHz - 1 GHz

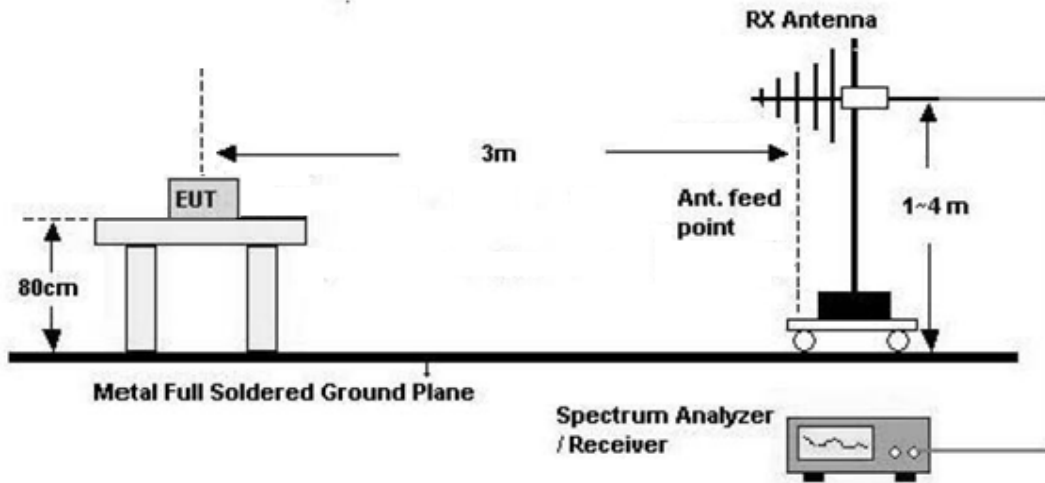

Above 1 GHz

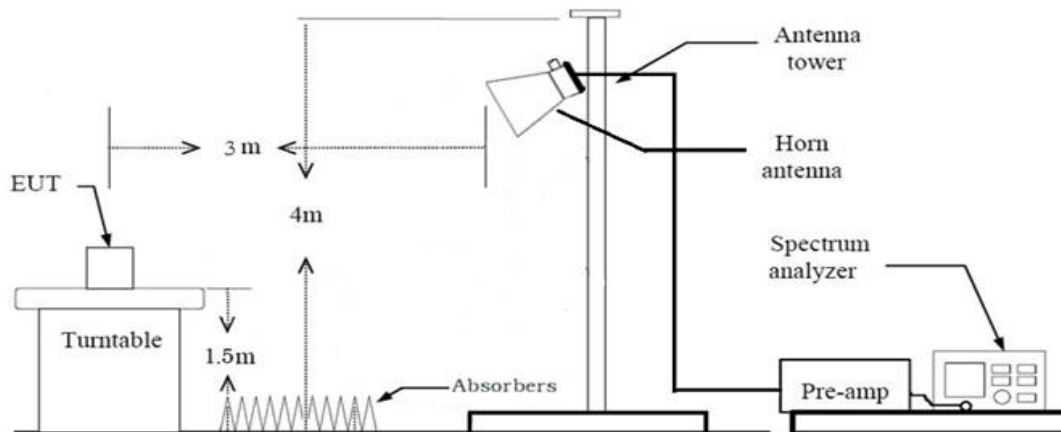

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

9. Total = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz

- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98 %

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than \pm 2 %

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total(Measurement Type : Peak)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle ≥ 98 %)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle < 98 %)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak

- Trace = Max hold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20 \log(\text{test distance} / \text{specific distance})$ (dB)

11. Total (Measurement Type : Peak)

= Peak Measured Value

Total(Measurement Type : Average, Duty cycle $\geq 98 \%$)

= Average Measured Value

Total(Measurement Type : Average, Duty cycle $< 98 \%$)

= Average Measured Value + Duty Cycle Factor

- We apply to the offset in the range 1 GHz - 18 GHz.
- The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD,SDM)
 - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
 - Radiated Spurious Emissions : Z
 - Radiated Restricted Band Edge : Z
4. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11b : 1 Mbps
 - 802.11g : 6 Mbps
 - 802.11n(HT20, HT40) : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. All test was performed with continuous signal.(Duty Cycle \geq 98%)

Conducted test

1. The EUT was configured with data rate of highest power.
 - 802.11b : 11 Mbps
 - 802.11g : 6 Mbps
 - 802.11n(HT20, HT40) : MCS0
2. All configurations of antenna were investigated and All case results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(MIMO)
3. All test was performed with continuous signal.(Duty Cycle \geq 98%)

AC Power line Conducted Emissions

1. Not Tested

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result	Status
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS	NT ^{Note2}
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS	C
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS	C
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 30 dBc		PASS	NT ^{Note2}
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS	NT ^{Note2}
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS	C ^{Note3}
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS	C ^{Note3}

Note:

1. C = Comply, NT = Not Tested, NA = Not Applicable, NC = Not Comply
2. C2PC model is electrically identical to the Original model.
The Product Equality Declaration includes detailed information about the changes between the devices.
3. The data from that application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the test result of section 9.
4. Output power was verified to be within the expected tune up tolerances prior to performing the spot checks for radiated spurious emissions and band edge to confirm that the proposed changes to the digital circuitry had not adversely affected the previously reported values in the original filing.

9. TEST RESULT

9.1 OUTPUT POWER

Note

MIMO_(Ant1+Ant2) Power = $10 \cdot \log((10^{(\text{Ant. 1 power} / 10)}) + (10^{(\text{Ant. 2 power} / 10)}))$

Peak Power

[MIMO_(Ant1+Ant2)]

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Peak Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11b	2412	1	11 M	18.05	17.46	20.78	30
	2437	6		19.61	19.26	22.45	30
	2462	11		19.65	19.85	22.76	30
	2467	12		19.54	19.74	22.65	30
	2472	13		16.50	17.12	19.83	30

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Peak Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11g	2412	1	6 M	22.60	22.78	25.70	30
	2437	6		22.42	22.72	25.58	30
	2462	11		22.53	22.91	25.73	30
	2467	12		21.57	21.68	24.64	30
	2472	13		13.57	14.56	17.10	30

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Peak Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11n (HT20)	2412	1	MCS 0	22.45	22.36	25.42	30
	2437	6		22.31	22.56	25.45	30
	2462	11		22.61	22.97	25.80	30
	2467	12		20.61	20.93	23.78	30
	2472	13		12.11	12.31	15.22	30

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Peak Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11n (HT40)	2422	3	MCS 0	21.96	22.13	25.06	30
	2437	6		22.18	22.40	25.30	30
	2452	9		20.71	21.06	23.90	30

Average Power

[MIMO_(Ant1+Ant2)]

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11b	2412	1	11 M	12.80	12.34	15.59	30
	2437	6		13.54	13.23	16.40	30
	2462	11		13.58	13.83	16.72	30
	2467	12		13.22	13.80	16.53	30
	2472	13		11.40	10.91	14.17	30

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11g	2412	1	6 M	14.52	14.02	17.29	30
	2437	6		14.28	13.74	17.03	30
	2462	11		14.35	14.21	17.29	30
	2467	12		11.60	11.91	14.77	30
	2472	13		5.19	6.05	8.65	30

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11n (HT20)	2412	1	MCS 0	14.08	13.50	16.81	30
	2437	6		14.21	14.10	17.17	30
	2462	11		14.35	14.29	17.33	30
	2467	12		11.46	12.35	14.94	30
	2472	13		2.60	3.69	6.19	30

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11n (HT40)	2422	3	MCS 0	13.52	13.09	16.32	30
	2437	6		13.25	13.47	16.37	30
	2452	9		12.66	12.34	15.51	30

9.2 POWER SPECTRAL DENSITY

Note :

1. MIMO_CDD(Ant1+Ant2) PSD = $10 \cdot \log((10^{(\text{Ant. 1 PSD} / 10)} + 10^{(\text{Ant. 2 PSD} / 10)}))$

[MIMO_CDD(Ant1+Ant2)]

BW	Frequency [MHz]	Channel No.	Data Rate	Power Spectral Density [dBm]			Limit
				ANT1	ANT2	MIMO	
802.11b	2412	1	11M	-1.149	-0.220	2.351	8 dBm/3 kHz
	2437	6	11M	0.652	0.104	3.397	
	2462	11	11M	0.740	0.689	3.725	
	2467	12	11M	0.434	0.267	3.362	
	2472	13	11M	-2.830	-1.777	0.739	
802.11g	2412	1	6M	-0.205	-0.785	2.525	
	2437	6	6M	-2.067	-0.542	1.772	
	2462	11	6M	-1.294	0.311	2.593	
	2467	12	6M	-3.615	-2.005	0.274	
	2472	13	6M	-10.066	-7.474	-5.569	
802.11n (HT20)	2412	1	MCS0	-1.227	-1.064	1.866	
	2437	6	MCS0	-1.476	-1.175	1.687	
	2462	11	MCS0	-1.512	0.177	2.424	
	2467	12	MCS0	-4.000	-1.855	0.214	
	2472	13	MCS0	-13.056	-10.614	-8.655	
802.11n (HT40)	2422	3	MCS0	-5.254	-4.633	-1.922	
	2437	6	MCS0	-5.365	-4.460	-1.879	
	2452	9	MCS0	-6.267	-6.102	-3.173	
	2412	1	11M	-1.149	-0.220	2.351	
	2437	6	11M	0.652	0.104	3.397	


☐ Test Plots

Note :


In order to simplify the report, attached plots were only the worst case PSD channel.

[MIMO_CDD(Ant1+Ant2)]

Power Spectral Density (802.11b-CH 11)

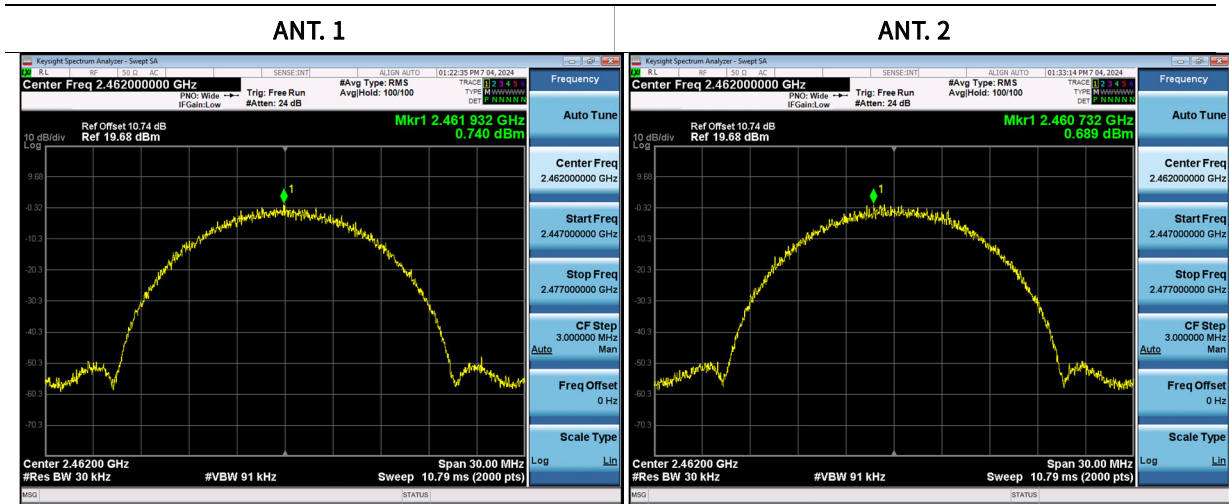


Power Spectral Density (802.11g-CH 11)

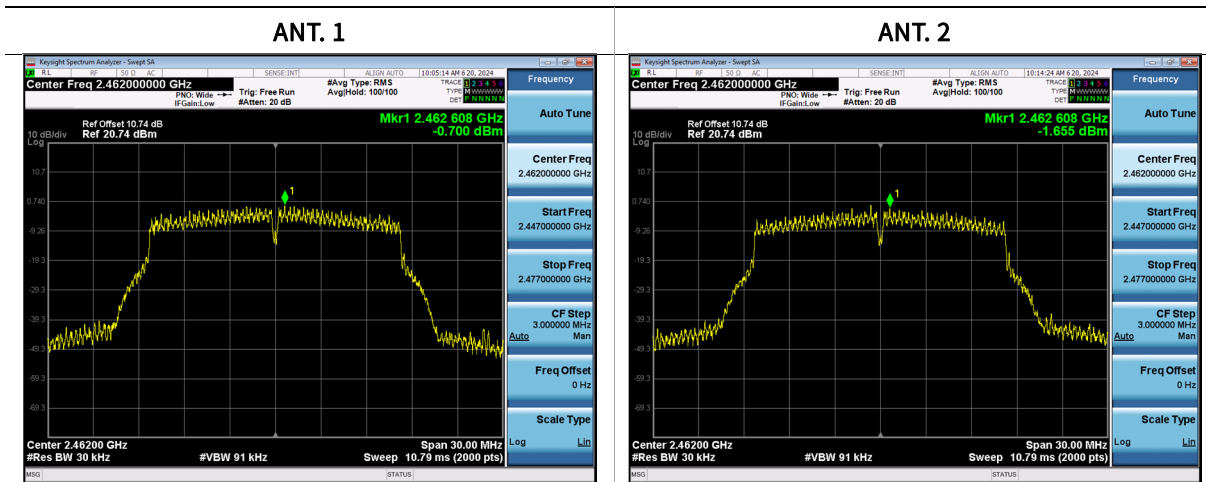


Power Spectral Density (802.11n(HT20)-CH 11)

ANT. 1

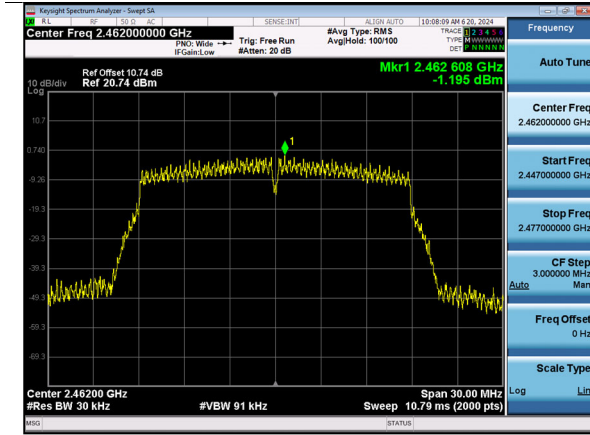


ANT. 2

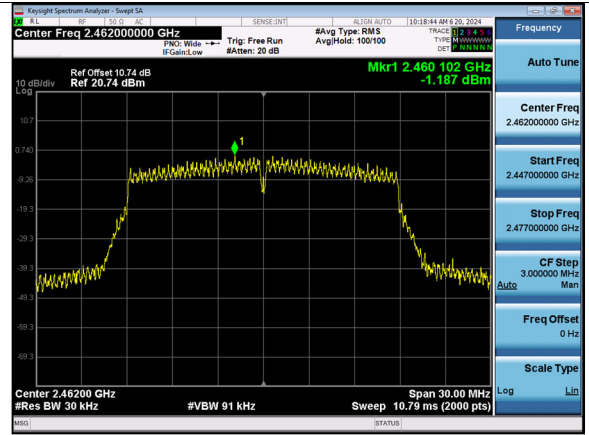


Power Spectral Density (802.11n(HT40)-CH 6)

ANT. 1

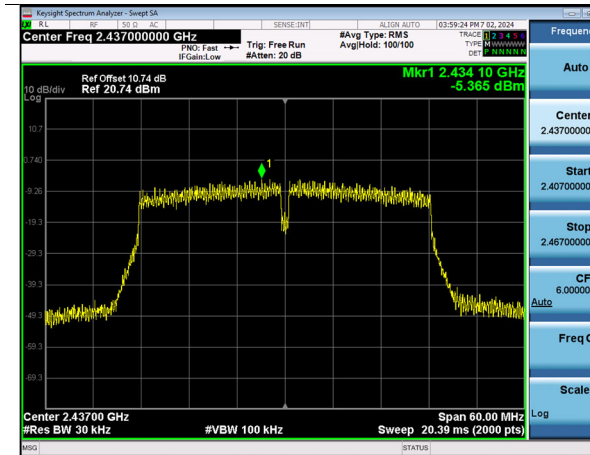

ANT. 2

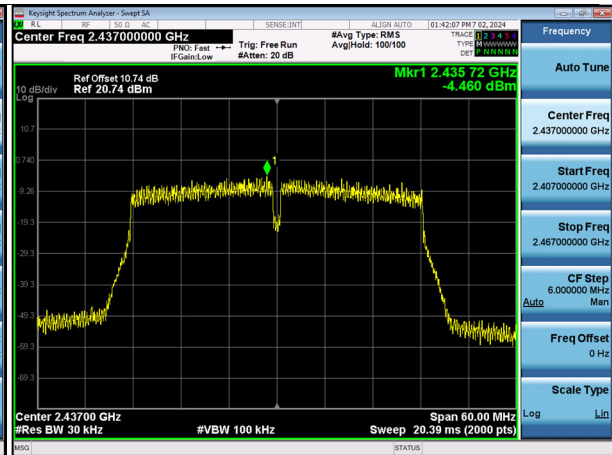

9.3 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V/m]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]

No Critical peaks found

Note:

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V/m]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

[MIMO_(Ant1+Ant2)]


Frequency Range : Above 1 GHz

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch


Frequency	Measured value	CL+AF+DF-AG	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	49.24	3.87	V	53.11	73.98	20.87	PK
4824	43.51	3.87	V	47.38	53.98	6.60	AV
7236	43.66	9.57	V	53.23	73.98	20.75	PK
7236	36.02	9.57	V	45.59	53.98	8.39	AV
4824	49.76	3.87	H	53.63	73.98	20.35	PK
4824	44.79	3.87	H	48.66	53.98	5.32	AV
7236	45.05	9.57	H	54.62	73.98	19.36	PK
7236	37.11	9.57	H	46.68	53.98	7.30	AV

▣ Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch. 1 3rd Harmonic)

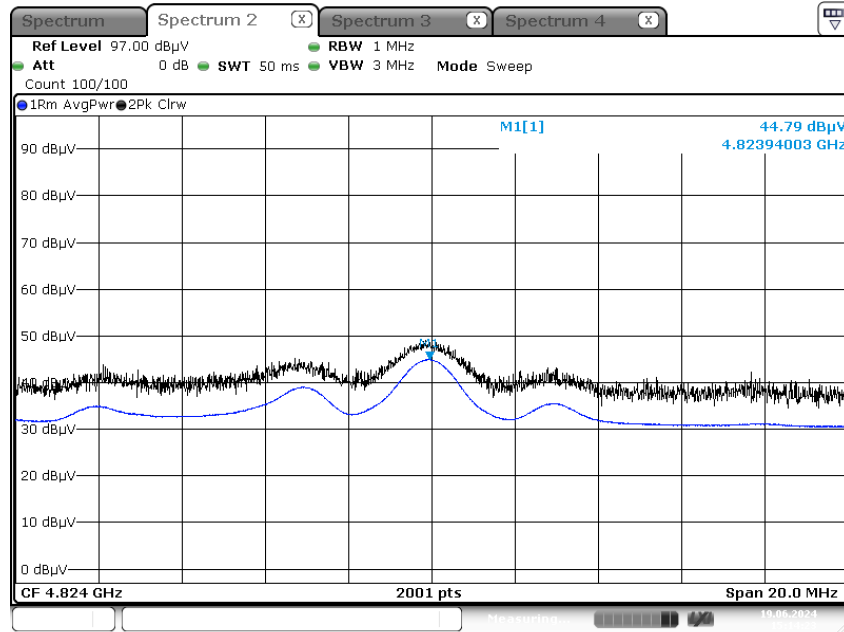

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch. 1 3rd Harmonic)

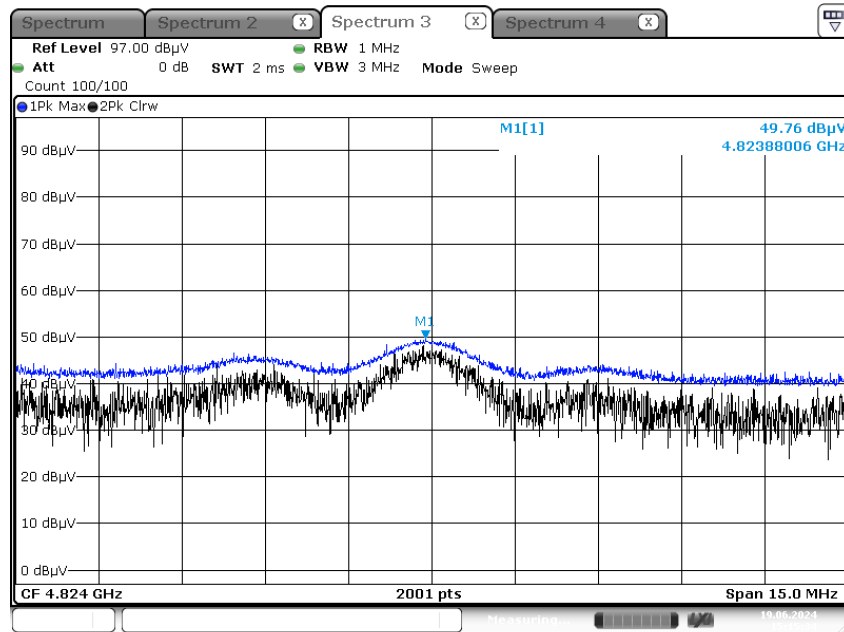

Note:

Plot of worst case are only reported.

9.4 RADIATED RESTRICTED BAND EDGES

[MIMO_(Ant1+Ant2)]


Operation Mode:	802.11n (HT40)
Transfer MCS Index:	0
Operating Frequency	2422 MHz
Channel No.	3 Ch

Frequency	Measured Value	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390	66.30	-	H	66.30	73.98	7.68	PK
2390	49.83	-	H	49.83	53.98	4.15	AV
2390	64.68	-	V	64.68	73.98	9.30	PK
2390	50.70	-	V	50.70	53.98	3.28	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)


▣ Test Plots

Radiated Restricted Band Edges plot - Average Reading (802.11n(HT40), Ch. 3, Z-V)

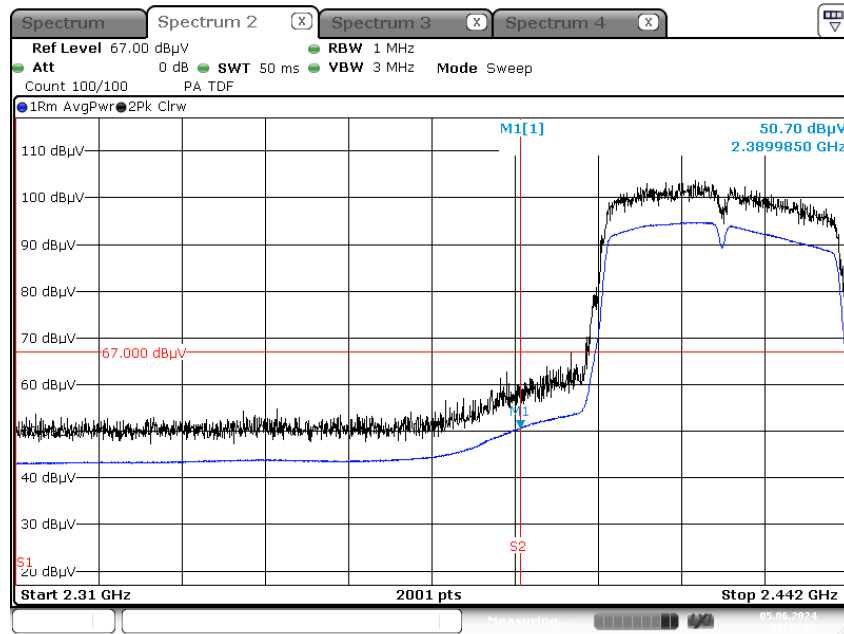

Date: 5. JUN. 2024 17:32:08

Radiated Restricted Band Edges plot - Peak Reading (802.11n(HT40), Ch. 3, Z-V)

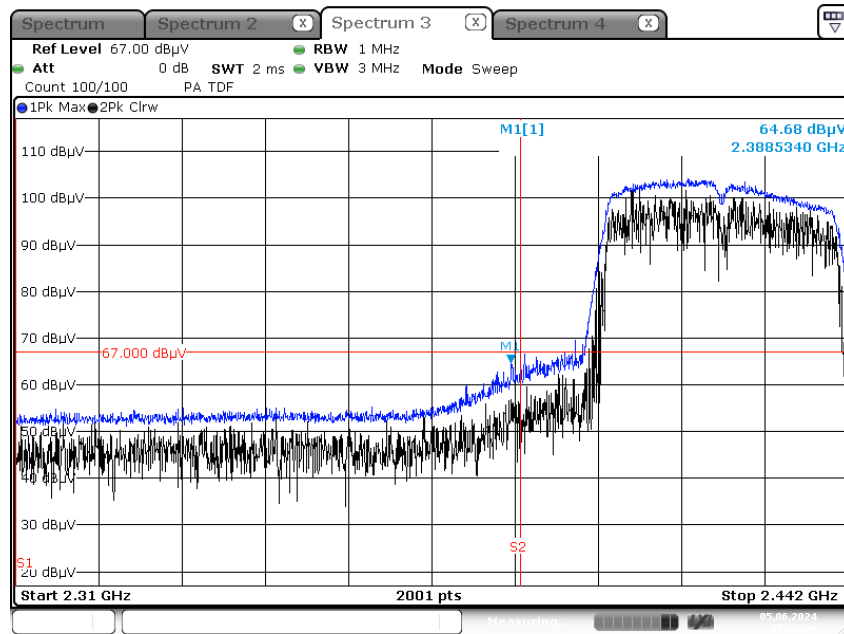

Date: 5. JUN. 2024 17:32:30

Note:

Plots of worst case are only reported.

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/02/2024	Annual
EMI Test Receiver	ESCI	Rohde & Schwarz	100584	05/08/2025	Annual
Temperature Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/04/2024	Annual
Power Meter	N1911A	Agilent	MY45100523	02/28/2025	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/22/2025	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/30/2024	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2025	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/02/2025	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	05/28/2025	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/20/2025	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/15/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S3AM	08/03/2025	Biennial
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/07/2026	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/07/2025	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/02/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/04/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/04/2025	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/14/2025	Annual
RF Switching System	FBSR-03A (3G HPF+LNA)	T&M SYSTEM	S3L1	11/17/2024	Annual
RF Switching System	FBSR-03A (10dB ATT+LNA)	T&M SYSTEM	S3L2	11/17/2024	Annual
RF Switching System	FBSR-03A (7G HPF+LNA)	T&M SYSTEM	S3L3	11/17/2024	Annual
RF Switching System	FBSR-03A (3dB ATT+LNA)	T&M SYSTEM	S3L4	11/17/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/19/2025	Annual
Spectrum Analyzer	FSV40 (9 kHz ~ 40 GHz)	Rohde & Schwarz	100900	12/06/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2407-FC003-P