



TEST REPORT

FCC/ISED BT LE Test for LGSBWAC97

APPLICANT

LG Electronics Inc.

REPORT NO.

HCT-RF-2207-FI014

DATE OF ISSUE

July 20, 2022

Tested by
Jin Gwan Lee

Technical Manager
Se Wook Park

Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.

BongJai Huh

BongJai Huh / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



TEST REPORT FCC/ISED BT LE Test for LGSBWAC97	REPORT NO. HCT-RF-2207-FI014
	DATE OF ISSUE July 20, 2022
	Additional Model -

Applicant **LG Electronics Inc.**
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Republic of Korea

Eut Type	RF Module
Model Name	LGSBWAC97
FCC ID	BEJLGSBWAC97
IC	2703H-LGSBWAC97
Max. RF Output Power	8.720 dBm (7.45 mW)
Modulation type	GFSK
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s)	Part 15.247
ISED Rule Part(s)	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 20, 2022	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

KOLAS Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	28
9. TEST RESULT	30
9.1 DUTY CYCLE	30
9.2 6 dB BANDWIDTH & 99 % BANDWIDTH	35
9.3 OUTPUT POWER	53
9.4 POWER SPECTRAL DENSITY	55
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	58
9.6 RADIATED SPURIOUS EMISSIONS	67
9.7 RADIATED RESTRICTED BAND EDGES	73
9.8 RECEIVER SPURIOUS EMISSIONS	75
9.9 POWERLINE CONDUCTED EMISSIONS	76
10. LIST OF TEST EQUIPMENT	80
11. ANNEX A_ TEST SETUP PHOTO	82

1. EUT DESCRIPTION

Model	LGSBWAC97	
Additional Model	-	
EUT Type	RF Module	
Power Supply	DC 3.30 V	
Frequency Range	2 402 MHz – 2 480 MHz	
Max. RF Output Power	Peak	1 MBit/s : 8.524 dBm (7.12 mW) 2 MBit/s : 8.720 dBm (7.45 mW) 125 kBit/s : 8.403 dBm (6.92 mW) 500 kBit/s : 8.483 dBm (7.05 mW)
	Average	1 MBit/s : 8.35 dBm (6.84 mW) 2 MBit/s : 8.22 dBm (6.64 mW) 125 kBit/s : 8.21 dBm (6.62 mW) 500 kBit/s : 8.30 dBm (6.76 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna Specification	Metal press Antenna Peak Gain : 1.12 dBi	
Date(s) of Tests	June 08, 2022 ~ July 19, 2022	
PMN (Product Marketing Number)	RF Module	
HVIN (Hardware Version Identification Number)	LGSBWAC97	
FVIN (Firmware Version Identification Number)	MT7668_V1.0	
HMN (Host Marketing Name)	N/A	
EUT serial numbers	Radiated: ETWCFMBC03-01 Conducted : ETWCFMBC03-02	
Factory	1) PT. LG INNOTEK INDONESIA Bekasi International Industrial Estate, Blok C8 NO. 12 & 12 A, Desa Cibatu, Cikarang Selatan, Bekasi 17750 Indonesia 2) COMPAL NETWORKING(KUNSHAN)CO.,LTD No. 520, Nanbang Rd, Economic & Technical Development Zone, Kunshan, Jiangsu Province, China	
EUT Connector Type	Top connector_FFC Cable Type Bottom Connector_FFC Cable Type	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

According to RSS-GEN(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

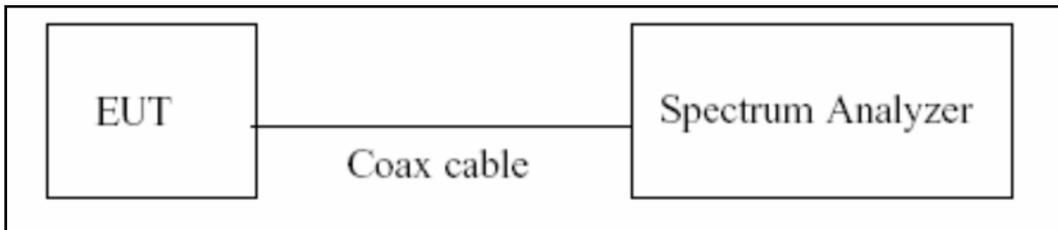

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth & 99 % Bandwidth(ISED)

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

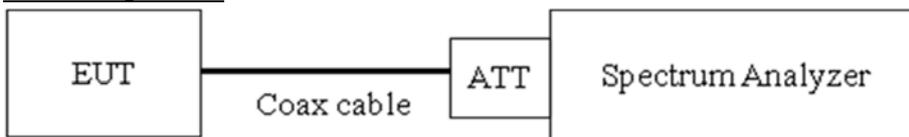

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Detector = Peak
- 4) Trace mode = Max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1 % ~ 5 % of the occupied bandwidth

VBW \approx 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

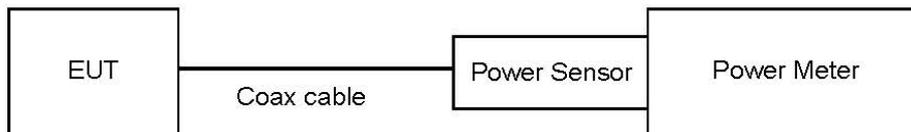

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
 - : Measure the peak power of the transmitter.

- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Level + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Level + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration

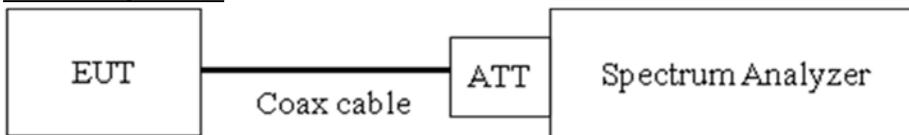

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = Max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Measured Level + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration

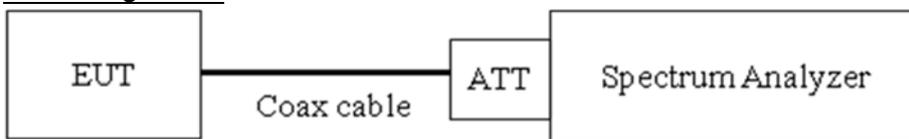

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = Max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.



Factors for frequency

Freq(MHz)	Factor(dB)
30	10.05
100	10.10
200	10.14
300	10.19
400	10.25
500	10.25
600	10.26
700	10.27
800	10.28
900	10.30
1 000	10.35
2 000	10.50
2 400	10.53
2 412	10.55
2 437	10.55
2 462	10.55
2 500	10.54
3 000	10.64
4 000	10.72
5 000	10.79
5 700	10.80
5 800	10.87
6 000	10.88
7 000	11.01
8 000	11.01
9 000	11.09
10 000	11.19
11 000	11.28
12 000	11.37
13 000	11.38
14 000	11.41
15 000	11.51
16 000	11.59
17 000	11.80
18 000	11.93
19 000	11.85
20 000	11.52
21 000	11.65
22 000	11.64
23 000	11.65
24 000	11.66
25 000	11.76

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

7.6. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength ($\mu\text{A}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

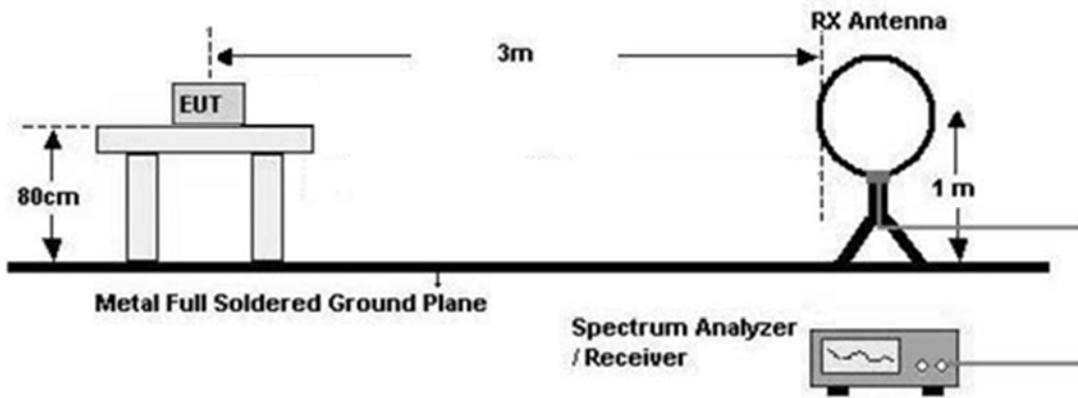

30 MHz - 1 GHz

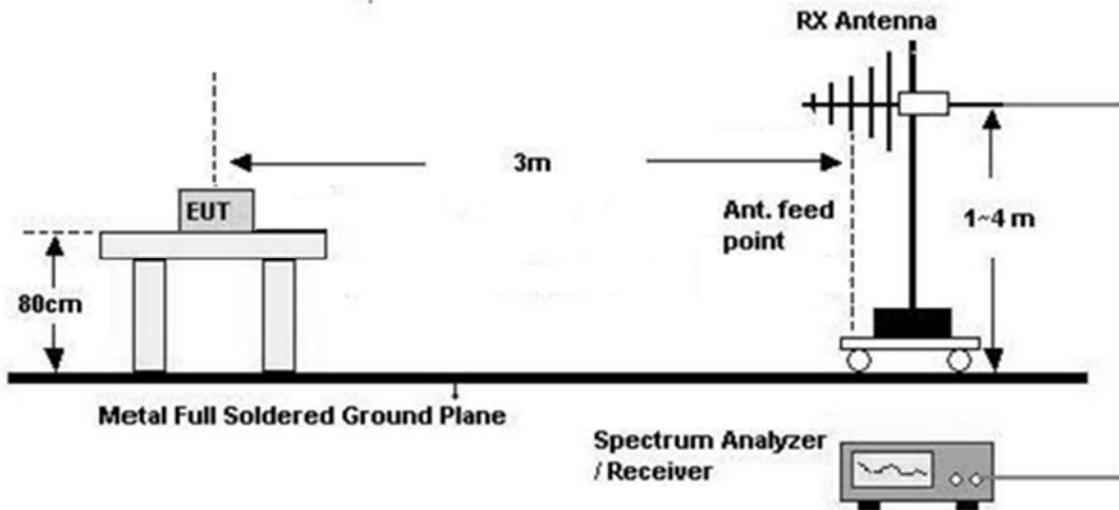

Above 1 GHz

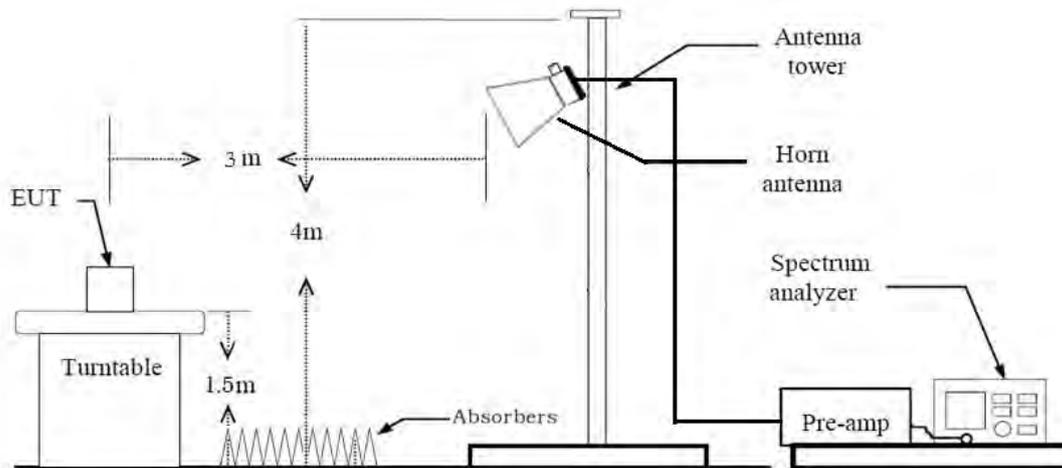

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz

※In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
 2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
 5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
 6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
 7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
 8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range 1 GHz – 10th Harmonics
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
 11. Total (Measurement Type : Peak)
 - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
 - Total (Measurement Type : Average)
 - = Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
- The duty cycle factor was the maximum supported by the protocol , then we measured average with no correction.

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 10th Harmonics
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW ≥ 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98%, duty cycle variations are less than ±2%
 - Measured Frequency Range : 1 GHz – 10th Harmonics
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW ≥ 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
8. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
9. Total(Measurement Type : Peak)
 - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
 Total(Measurement Type : Average)
 - = Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
 - The duty cycle factor was the maximum supported by the protocol , then we measured average with no correction.
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Level + Correction Factor

7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

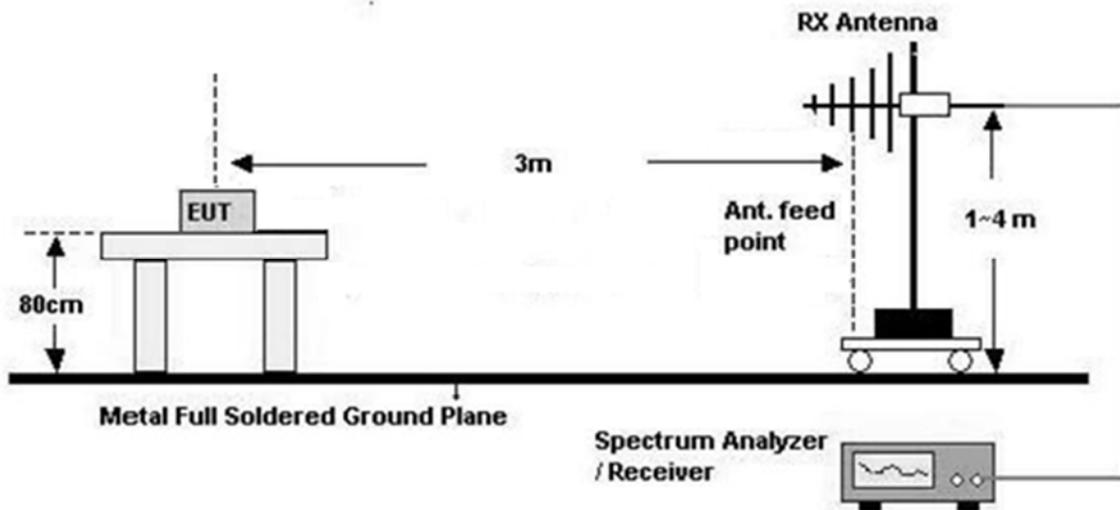

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

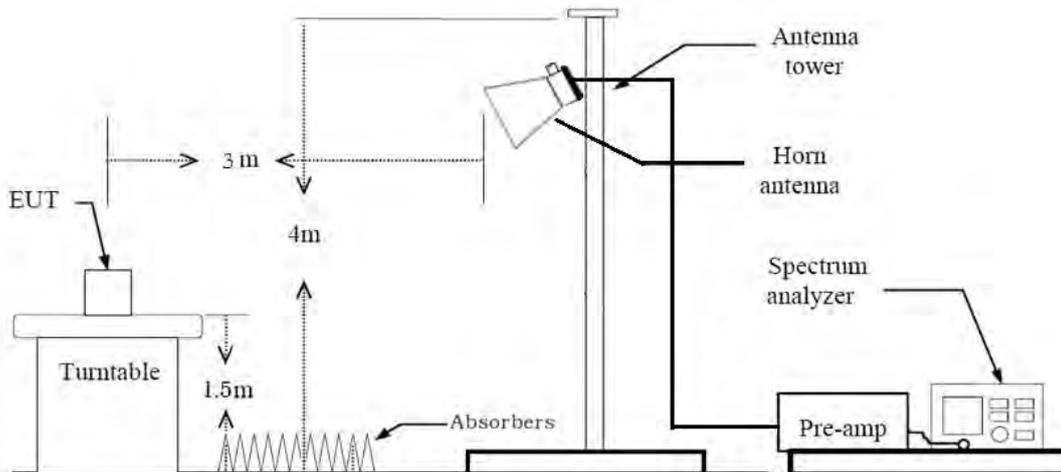

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 10th Harmonics

- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 10 kHz

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

7.9. Worst case configuration and mode

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone
 - Worstcase : Stand alone
2. EUT Axis:
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
3. All packet length of operation were investigated and the worst case configuration results are reported.
(Worst case : 1 M 255 Byte, 2 M 255 Byte)
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
5. Top connector_FFC Cable Type, Bottom Connector_FFC Cable Type were tested and the worst case results are reported.
(Worst case : Bottom Connector_FFC Cable Type)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone
 - Worstcase : Stand alone

Conducted test

1. All packet length of operation were investigated and the worst case configuration results are reported.
(Worst case : 1 M 255 Byte, 2 M 255 Byte)

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99 % Bandwidth	RSS-GEN, 6.7	NA		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.4	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 5, 6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 7		PASS


9. TEST RESULT

9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.379	0.626	0.605	2.18
	255	2.125	2.500	0.850	0.71
2M	37	0.195	0.624	0.312	5.05
	255	1.067	1.877	0.568	2.45
125k	37	0.379	0.626	0.605	2.18
	255	2.122	2.496	0.850	0.71
500k	37	0.379	0.626	0.605	2.18
	255	2.120	2.500	0.848	0.72

1 MBit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

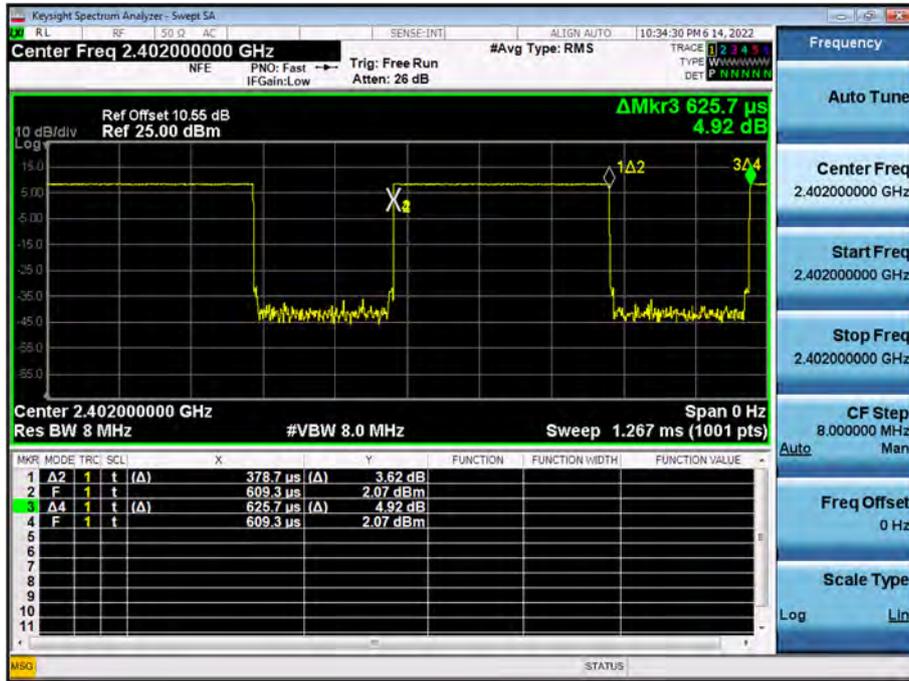


1 MBit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)




2 MBit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

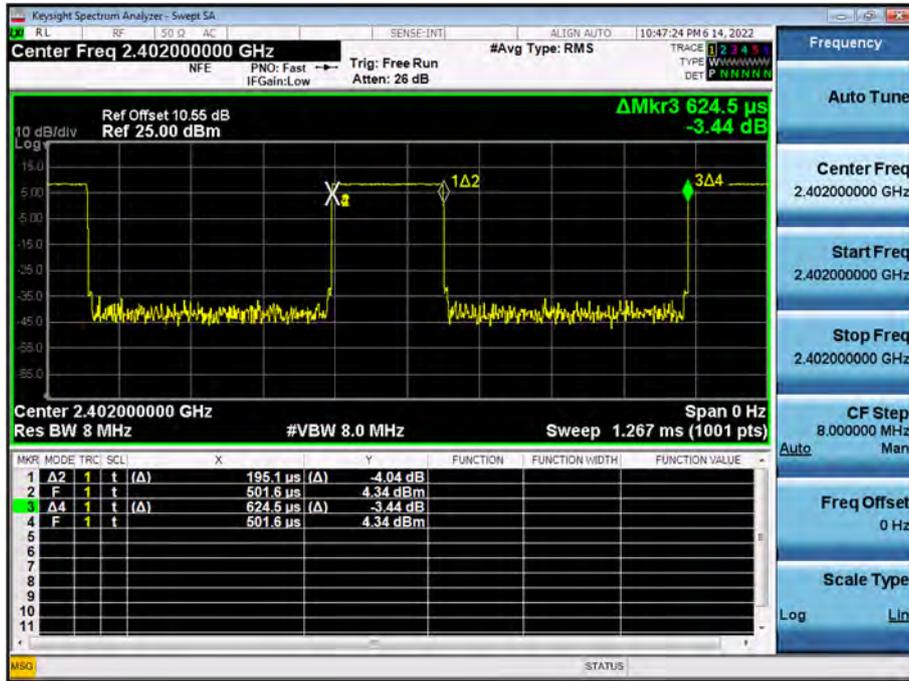


2 MBit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

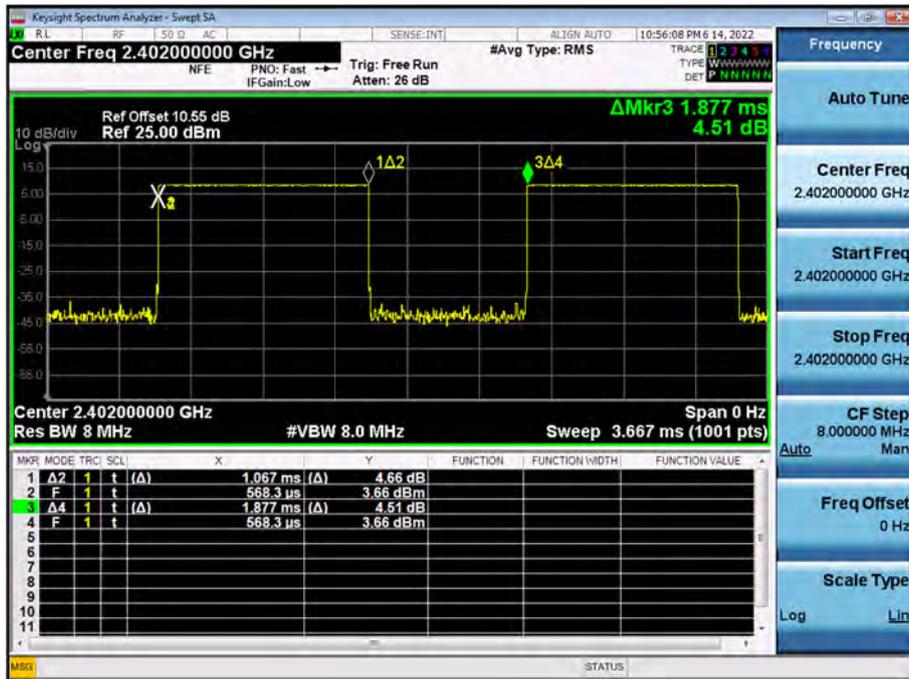

125 kBit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

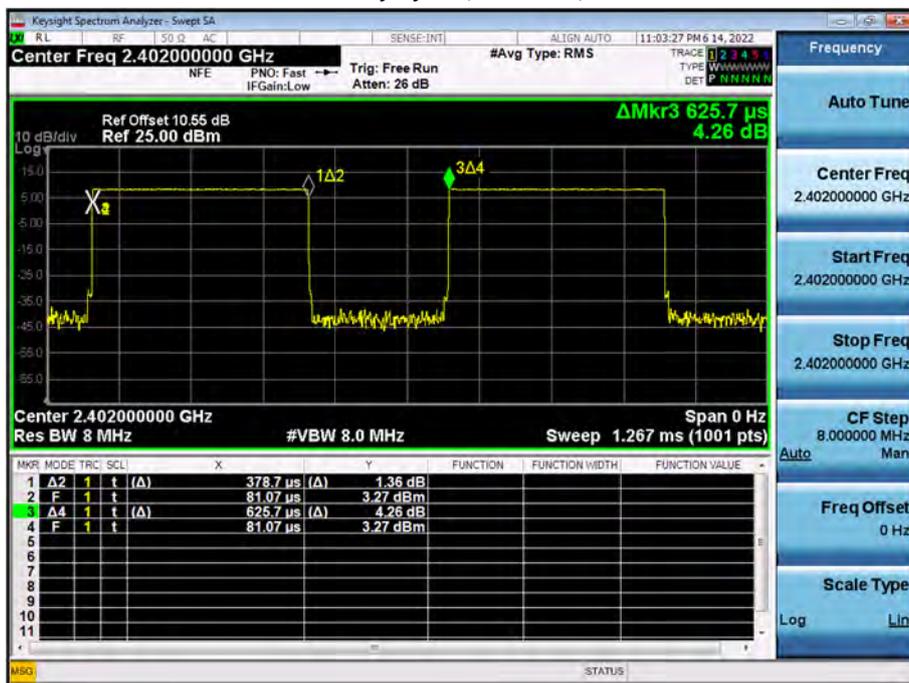


125 kBit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)




500 kBit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

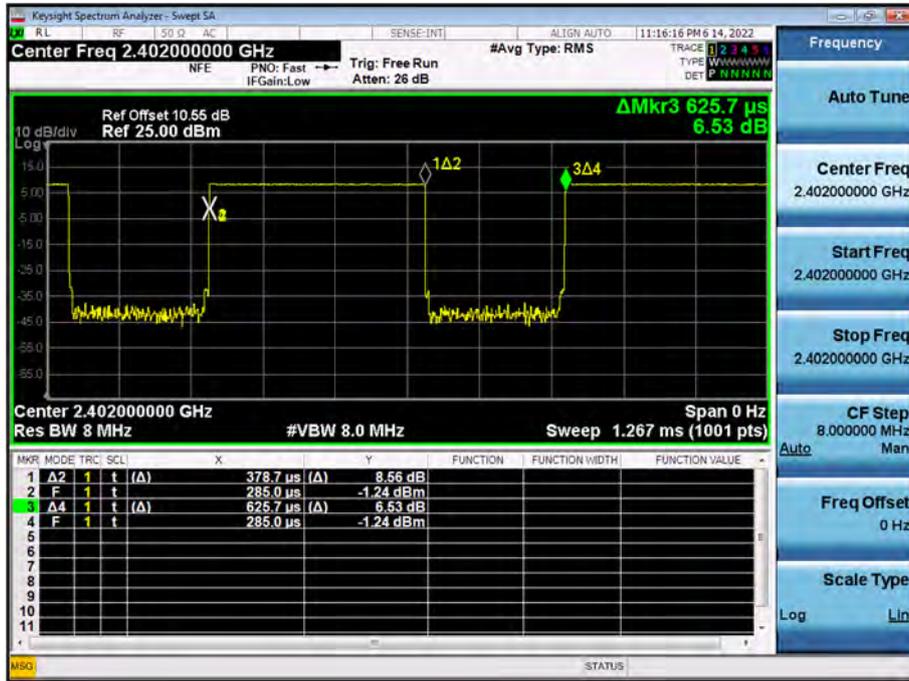

500 kBit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

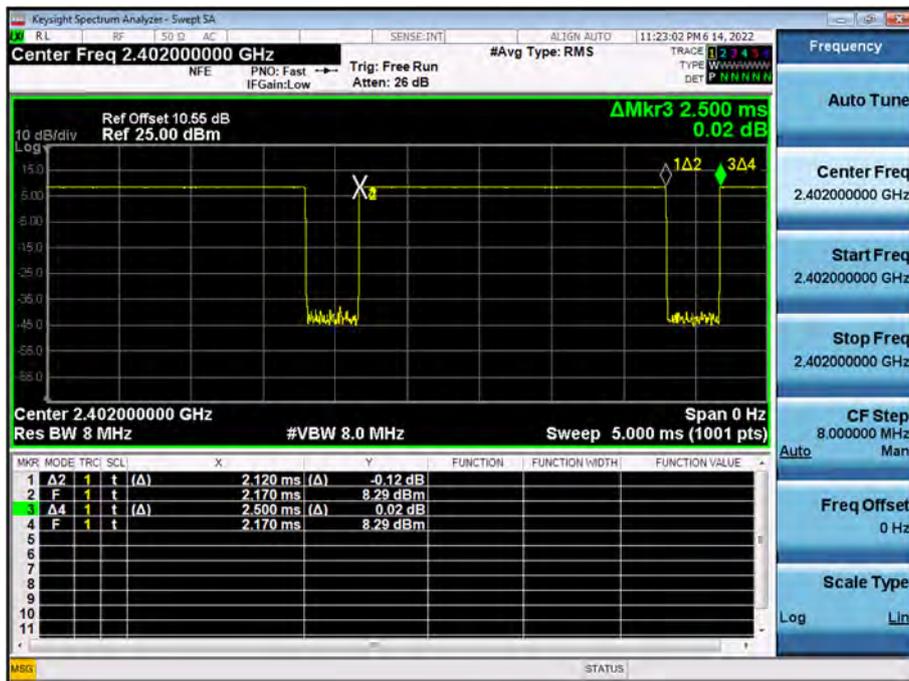

9.2 6 dB BANDWIDTH & 99 % BANDWIDTH

FCC

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37 Byte	0	698.6	> 500
	19	695.8	
	39	697.3	
1M 255 Byte	0	670.9	> 500
	19	668.3	
	39	671.8	
2M 37 Byte	0	1251.0	> 500
	19	1248.9	
	39	1252.7	
2M 255 Byte	0	1241.1	> 500
	19	1242.0	
	39	1245.2	
125k 37 Byte	0	691.6	> 500
	19	695.4	
	39	699.0	
125k 255 Byte	0	668.8	> 500
	19	666.8	
	39	667.9	
500k 37 Byte	0	701.3	> 500
	19	695.6	
	39	698.7	
500k 255 Byte	0	665.2	> 500
	19	668.4	
	39	667.4	

Note:

Worst case test Plot Only

1M Bit/s: 255 Byte


2M Bit/s: 255 Byte

125k Bit/s: 255 Byte


500k Bit/s: 255 Byte

1M Bit/s(255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

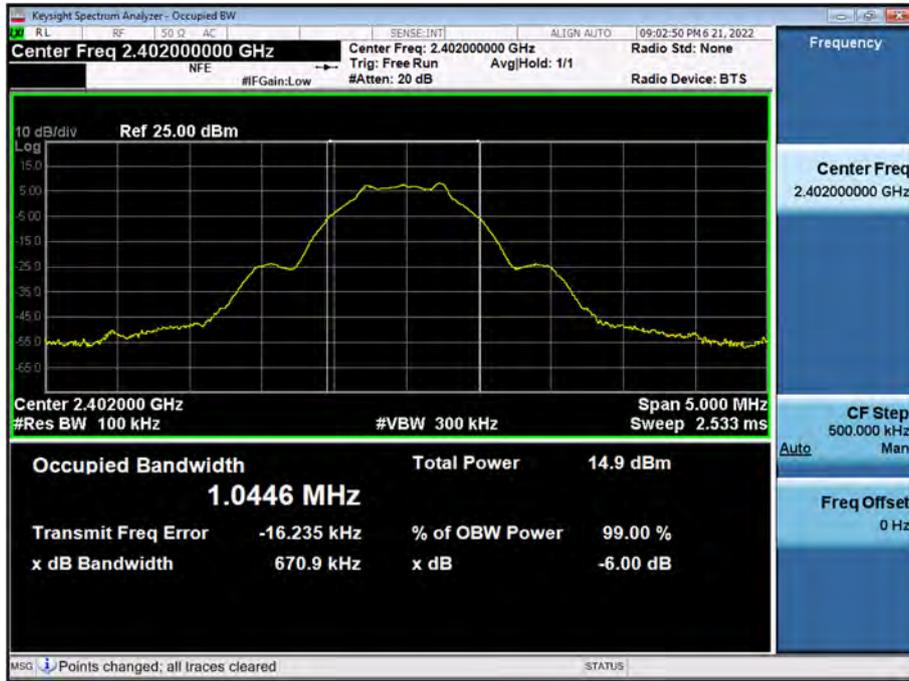

6 dB Bandwidth plot (Mid-CH 19)

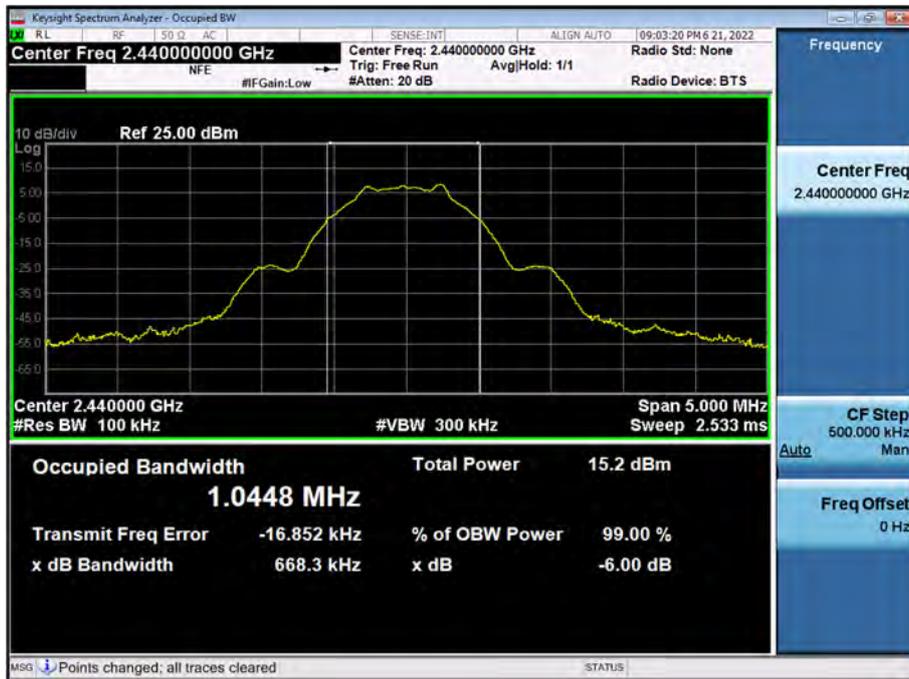

6 dB Bandwidth plot (High-CH 39)



2M Bit/s(255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



125k Bit/s(255 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)




6 dB Bandwidth plot (High-CH 39)

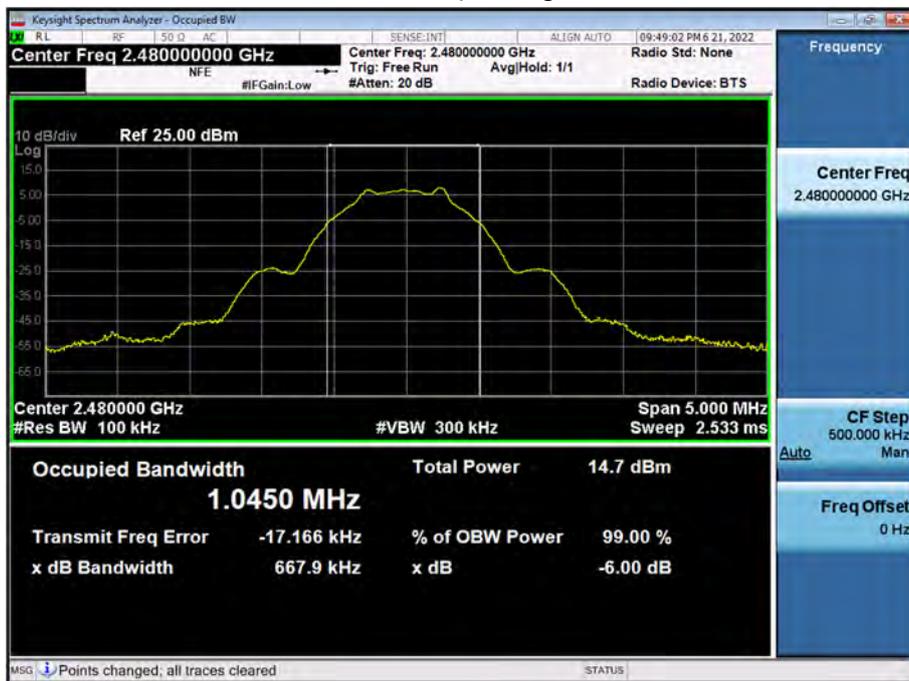

500k Bit/s(255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

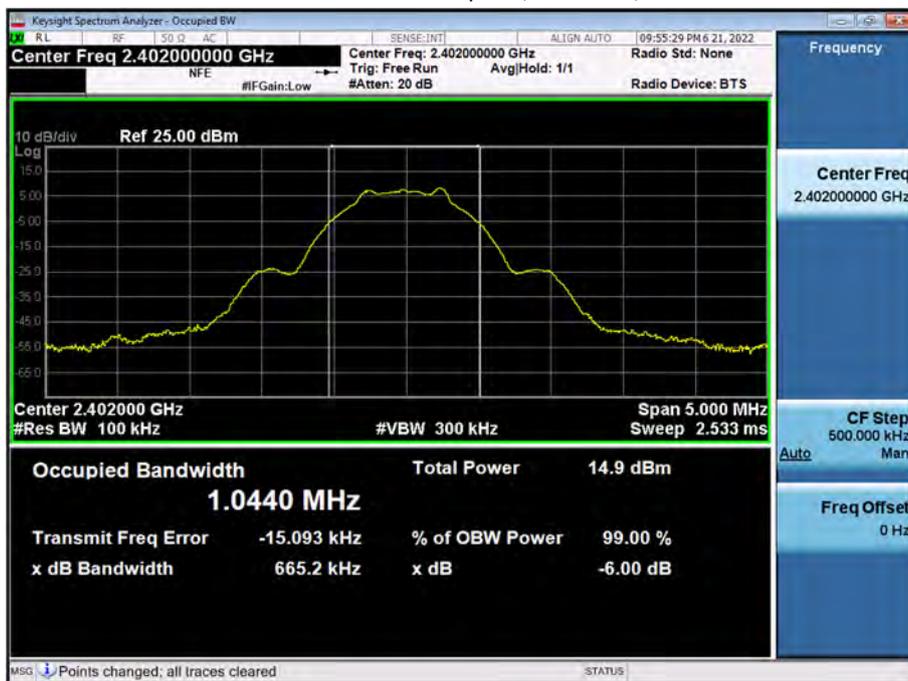


6 dB Bandwidth plot (Mid-CH 19)





6 dB Bandwidth plot (High-CH 39)

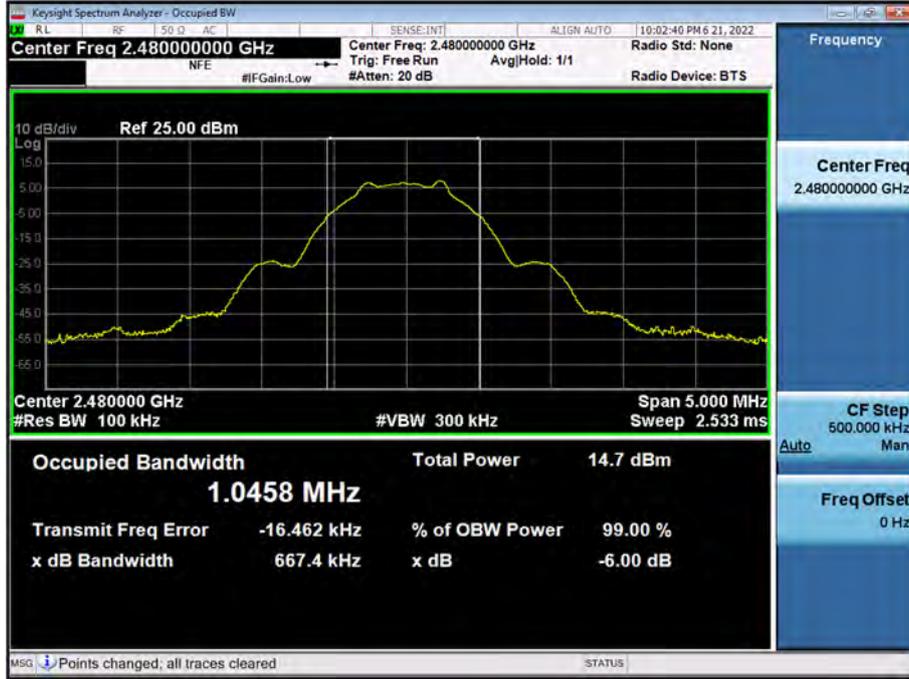

99 % Bandwidth(ISED)

Mode (Bit/s)	Channel	99 % Bandwidth (MHz)	Limit (kHz)
1M(37)	0	1.0377	> 500
	19	1.0380	
	39	1.0386	
1M(255)	0	1.0304	> 500
	19	1.0314	
	39	1.0306	
2M(37)	0	2.0637	> 500
	19	2.0629	
	39	2.0646	
2M(255)	0	2.0667	> 500
	19	2.0663	
	39	2.0685	
125k(37)	0	1.0382	> 500
	19	1.0385	
	39	1.0385	
125k(255)	0	1.0322	> 500
	19	1.0314	
	39	1.0304	
500k(37)	0	1.0377	> 500
	19	1.0381	
	39	1.0387	
500k(255)	0	1.0300	> 500
	19	1.0295	
	39	1.0325	

Note:

Worst case test Plot Only

1M Bit/s: 37 Byte

2M Bit/s: 255 Byte

125k Bit/s: 37 Byte

500k Bit/s: 37 Byte

▣ 1M Bit/s (37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)




99 % Bandwidth plot (Mid-CH 19)





99 % Bandwidth plot (High-CH 39)

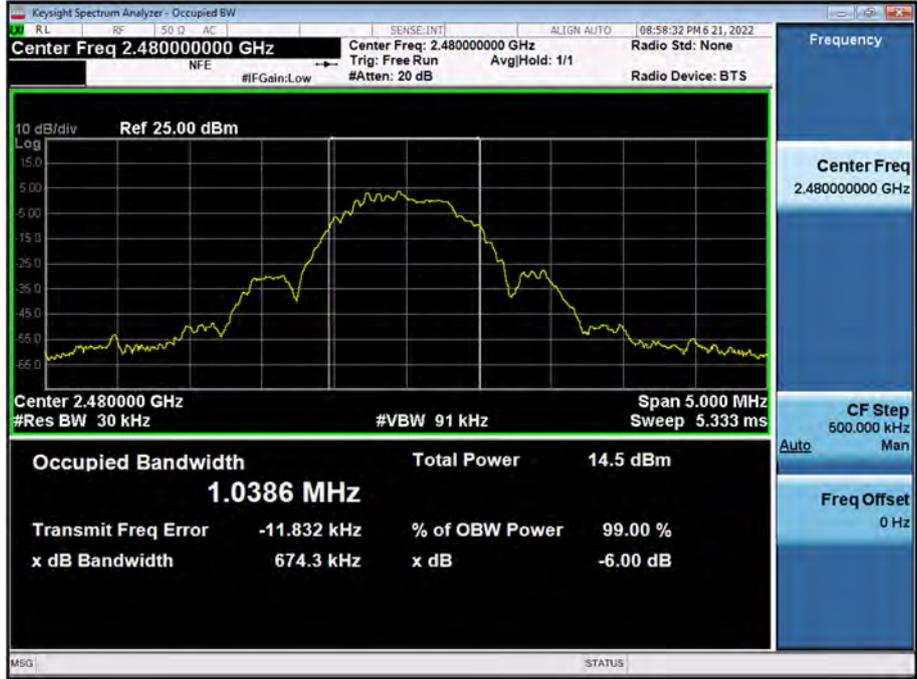

2M Bit/s (255 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)





99 % Bandwidth plot (High-CH 39)



125k Bit/s(37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)




99 % Bandwidth plot (Mid-CH 19)





99 % Bandwidth plot (High-CH 39)

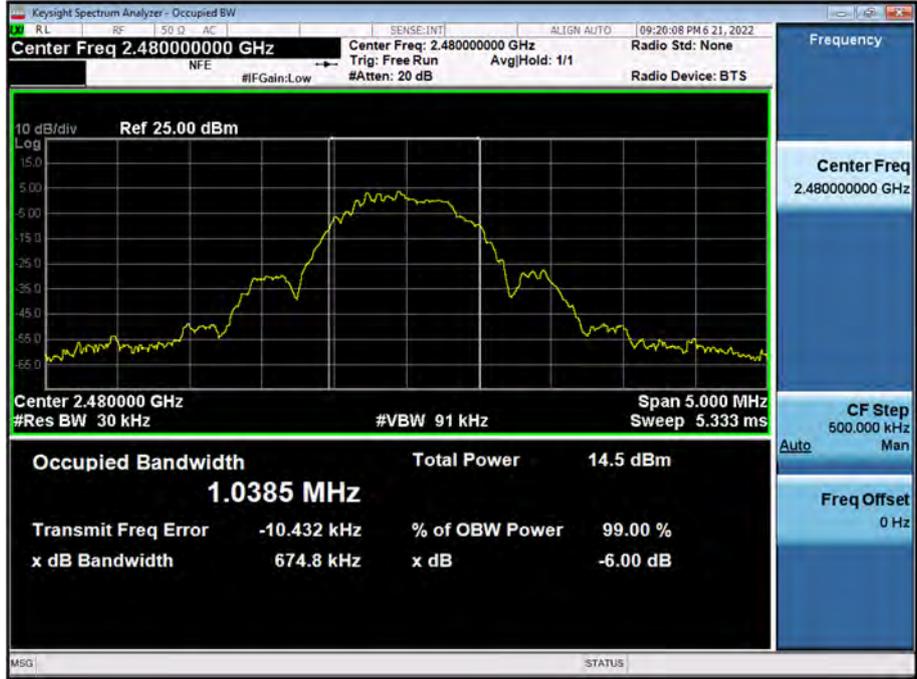

500k Bit/s(37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)




99 % Bandwidth plot (Mid-CH 19)





99 % Bandwidth plot (High-CH 39)

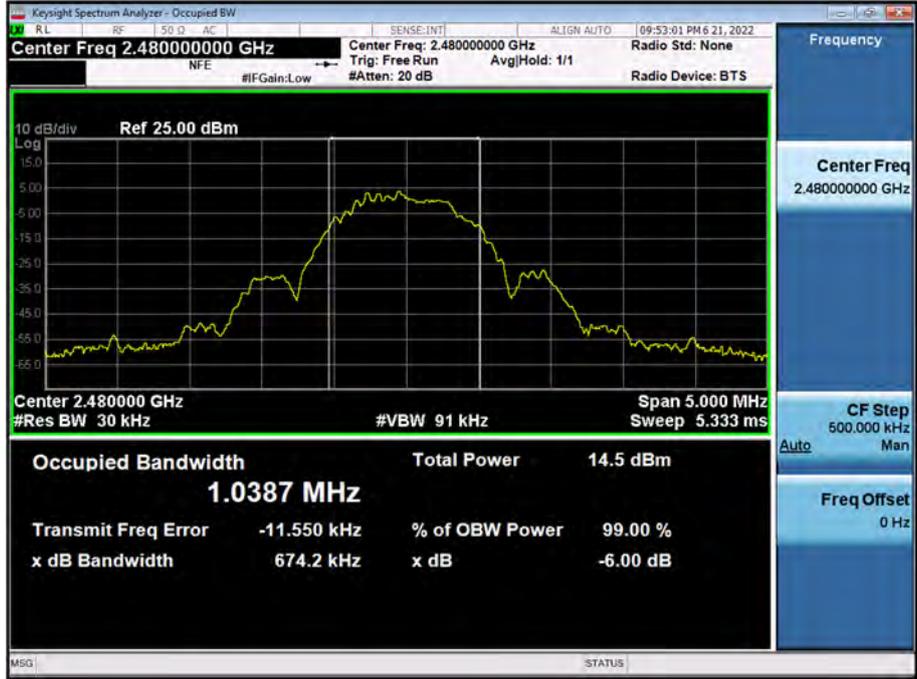

9.3 OUTPUT POWER

Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	8.338	30
		2440	19	8.524	
		2480	39	8.126	
	255	2402	0	8.306	
		2440	19	8.514	
		2480	39	8.104	
2M	37	2402	0	8.479	
		2440	19	8.720	
		2480	39	8.333	
	255	2402	0	8.478	
		2440	19	8.704	
		2480	39	8.332	
125k	37	2402	0	8.222	
		2440	19	8.401	
		2480	39	8.023	
	255	2402	0	8.223	
		2440	19	8.403	
		2480	39	8.009	
500k	37	2402	0	8.261	
		2440	19	8.483	
		2480	39	8.116	
	255	2402	0	8.318	
		2440	19	8.462	
		2480	39	8.094	

Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
1M	37	2402	0	5.87	2.18	8.05	30
		2440	19	6.17	2.18	8.35	
		2480	39	5.67	2.18	7.85	
	255	2402	0	7.33	0.71	8.04	
		2440	19	7.60	0.71	8.31	
		2480	39	7.09	0.71	7.80	
2M	37	2402	0	3.05	5.05	8.10	
		2440	19	3.15	5.05	8.20	
		2480	39	2.66	5.05	7.71	
	255	2402	0	5.35	2.45	7.80	
		2440	19	5.77	2.45	8.22	
		2480	39	5.39	2.45	7.84	
125k	37	2402	0	5.83	2.18	8.01	
		2440	19	5.99	2.18	8.17	
		2480	39	5.54	2.18	7.72	
	255	2402	0	7.22	0.71	7.93	
		2440	19	7.50	0.71	8.21	
		2480	39	7.01	0.71	7.72	
500k	37	2402	0	5.80	2.18	7.98	
		2440	19	6.12	2.18	8.30	
		2480	39	5.67	2.18	7.85	
	255	2402	0	7.34	0.72	8.06	
		2440	19	7.56	0.72	8.28	
		2480	39	7.09	0.72	7.81	

Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.55 dB is offset for 2.4 GHz Band.

9.4 POWER SPECTRAL DENSITY


Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm/3kHz)
2402	0	1 MBit/s 37 Byte	-7.296	8
2440	19		-7.006	
2480	39		-7.594	
2402	0	1 MBit/s 225 Byte	-8.439	
2440	19		-8.174	
2480	39		-8.718	
2402	0	2 MBit/s 37 Byte	-9.579	
2440	19		-9.307	
2480	39		-9.873	
2402	0	2 MBit/s 225 Byte	-11.172	
2440	19		-10.831	
2480	39		-11.494	
2402	0	125 kBit/s 37 Byte	-7.297	
2440	19		-7.044	
2480	39		-7.574	
2402	0	125 kBit/s 225 Byte	-8.416	
2440	19		-8.052	
2480	39		-8.789	
2402	0	500 kBit/s 37 Byte	-7.267	
2440	19		-7.051	
2480	39		-7.601	
2402	0	500 kBit/s 225 Byte	-8.415	
2440	19		-8.159	
2480	39		-8.787	

Note :


1. The PSD measured results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.55 dB is offset for 2.4 GHz Band.
4. In order to simplify the report, attached plots were only the worst case channel and data rate.
Worst case test : 1 MBit/s (37 Byte)

▣ 1 MBit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)

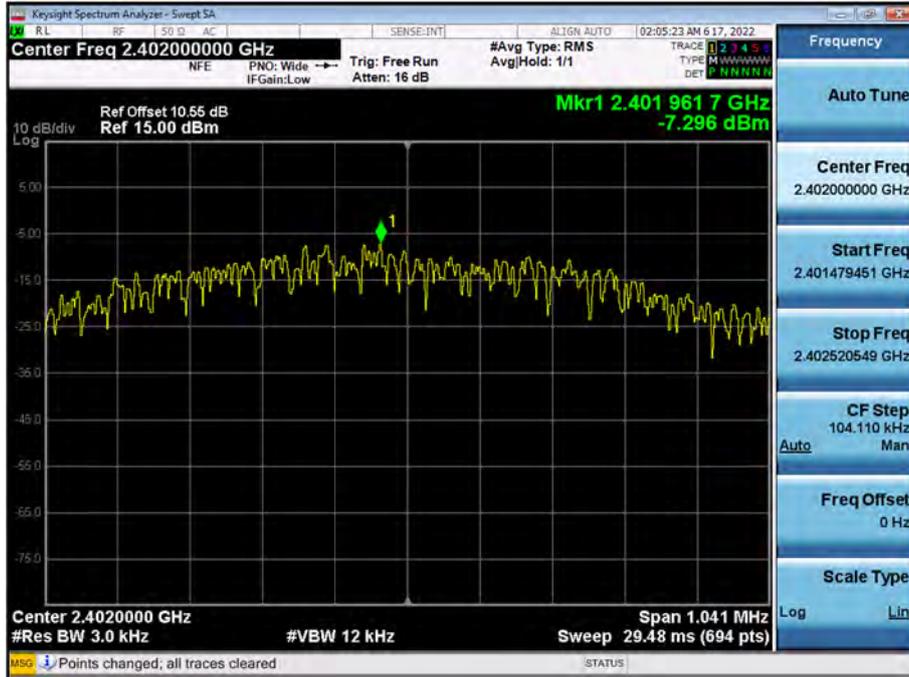


Power Spectral Density (Mid-CH 19)

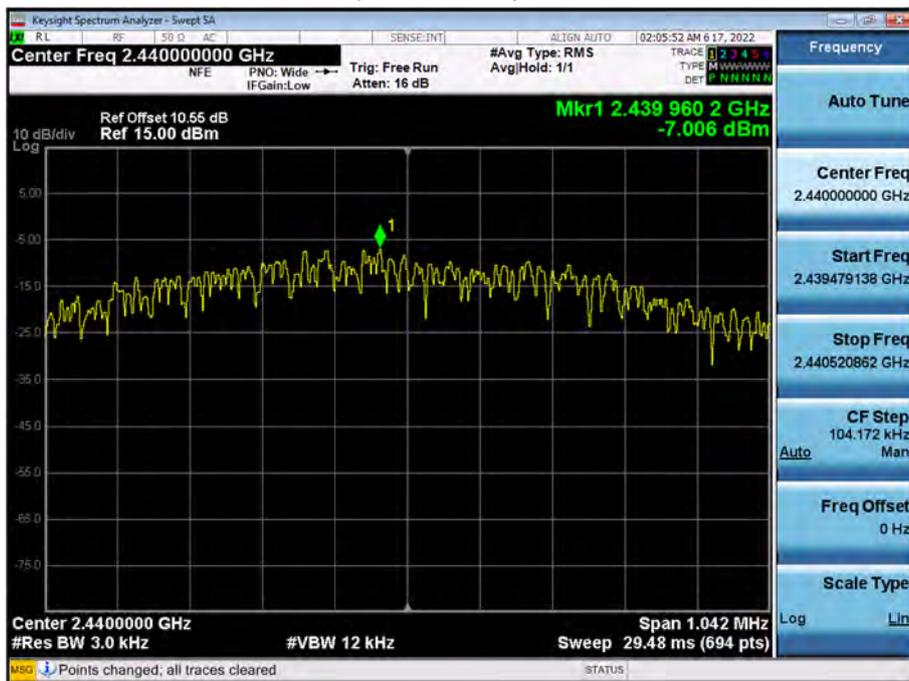



Power Spectral Density (High-CH 39)

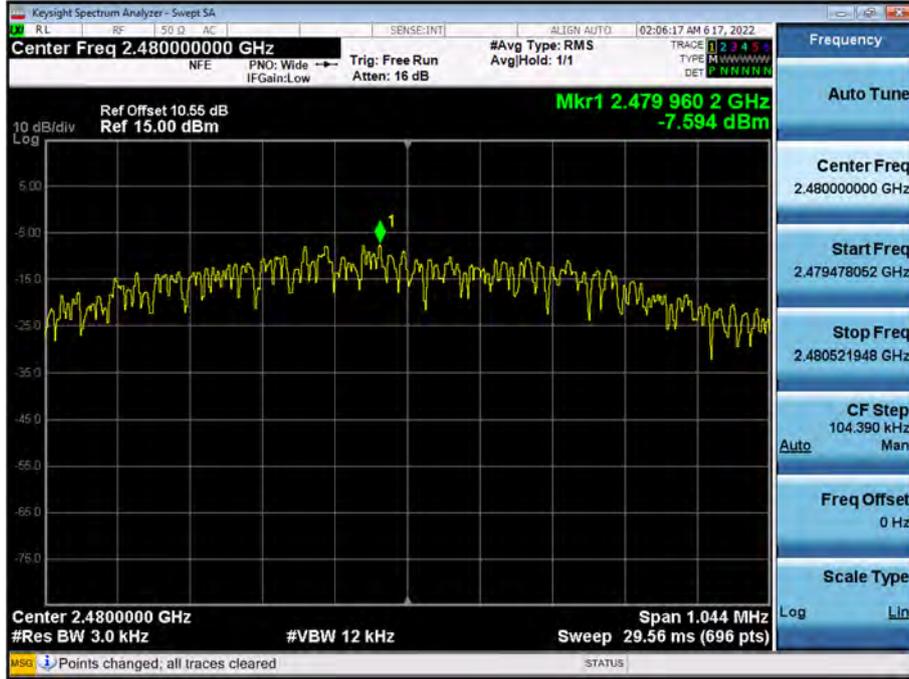

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

[BAND EDGE]

Frequency (MHz)	Mode	Channel No.	Position	Test Result	
				Measured Level (dB)	Limit (dBc)
2402	1M Bit/s 37 Byte	0	Lower	57.358	20
2480		39	Upper	58.089	20
2402	1M Bit/s 255 Byte	0	Lower	57.455	20
2480		39	Upper	59.539	20
2402	2M Bit/s 37 Byte	0	Lower	32.228	20
2480		39	Upper	56.865	20
2402	2M Bit/s 255 Byte	0	Lower	32.380	20
2480		39	Upper	56.053	20
2402	125k Bit/s 37 Byte	0	Lower	56.337	20
2480		39	Upper	59.249	20
2402	125k Bit/s 255 Byte	0	Lower	57.699	20
2480		39	Upper	59.419	20
2402	500k Bit/s 37 Byte	0	Lower	57.061	20
2480		39	Upper	58.925	20
2402	500k Bit/s 255 Byte	0	Lower	57.371	20
2480		39	Upper	58.399	20

Note :

1. Worst case
 Lower : 125k Bit/s (255 Byte)
 Upper : 1M Bit/s (255 Byte)


[CONDUCTED SPURIOUS EMISSIONS]

Note :

1. Worst case
 1M Bit/s (37 Byte)


125 MBit/s (255 Byte) Test Plots -BandEdge

Low-CH 0

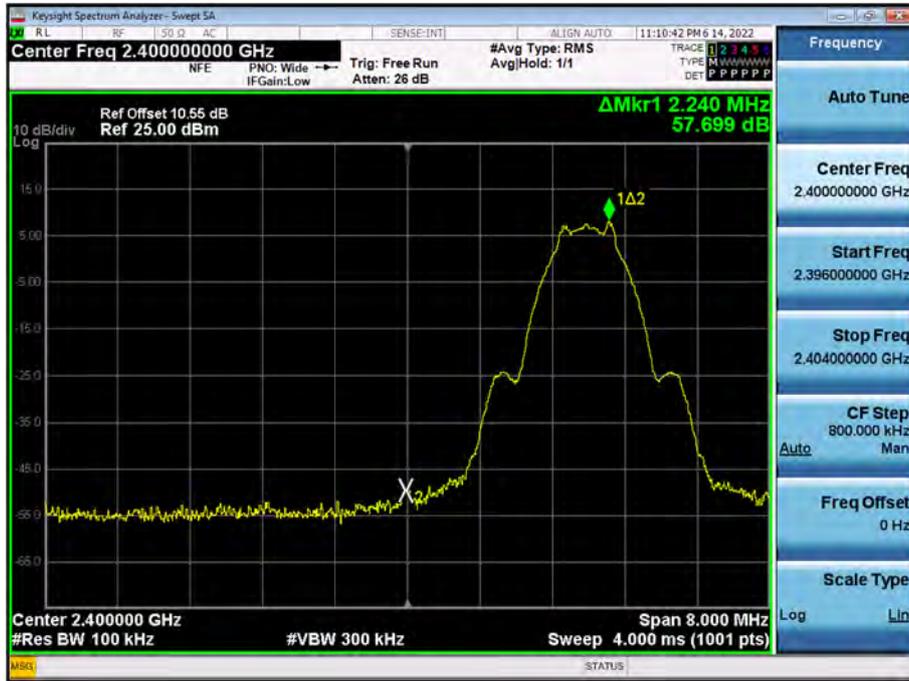

1M Bit/s (255 Byte) Test Plots -BandEdge


High-CH 39

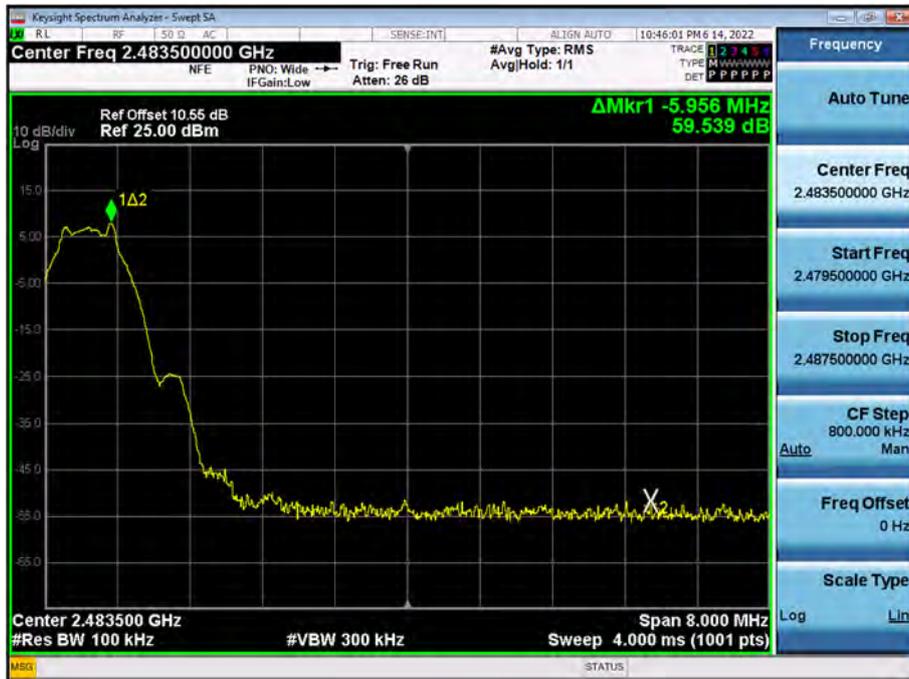

☐ 1 MBit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

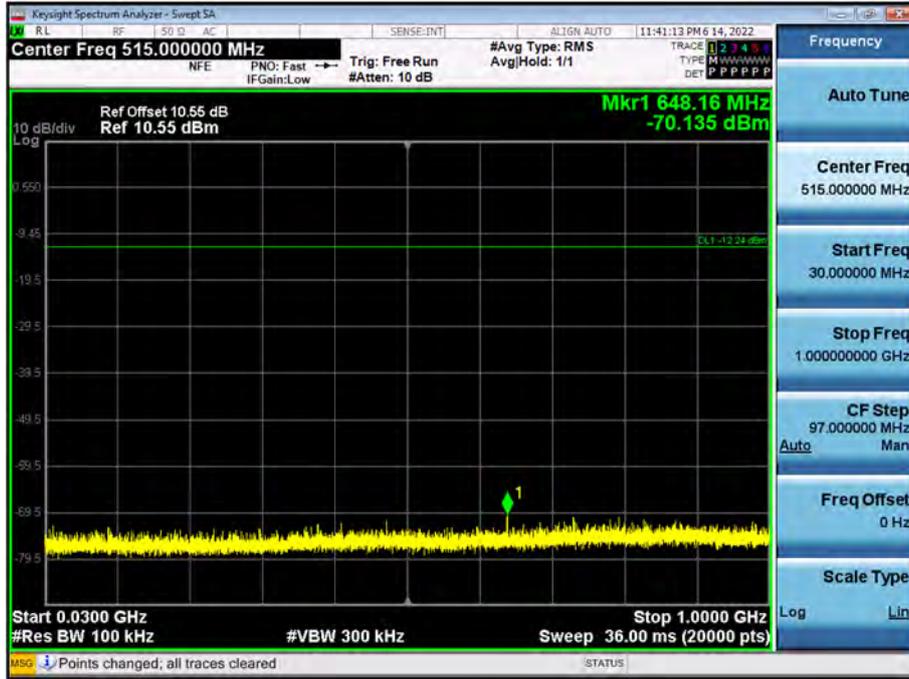


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

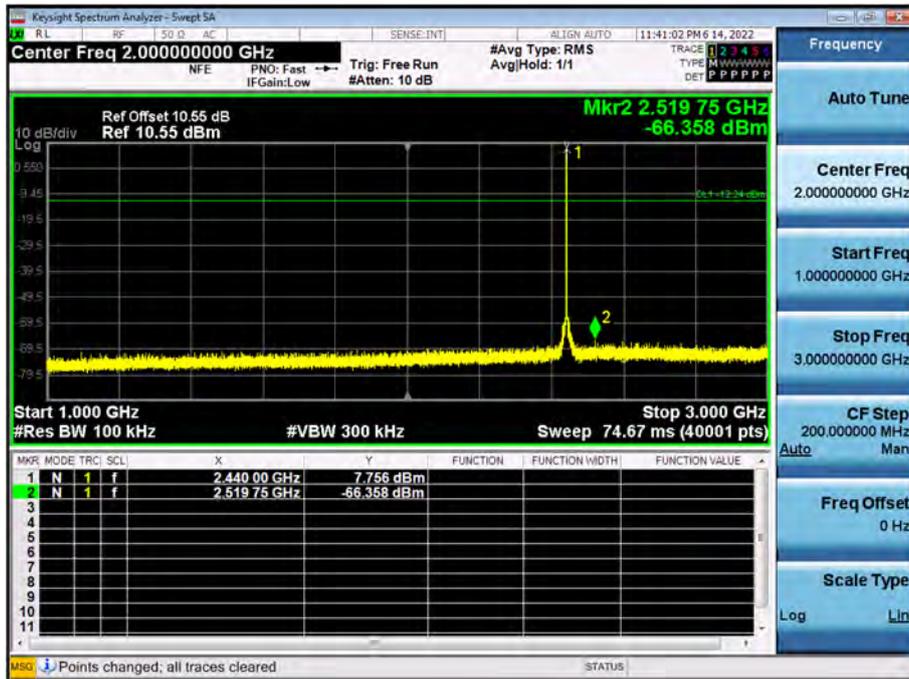


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

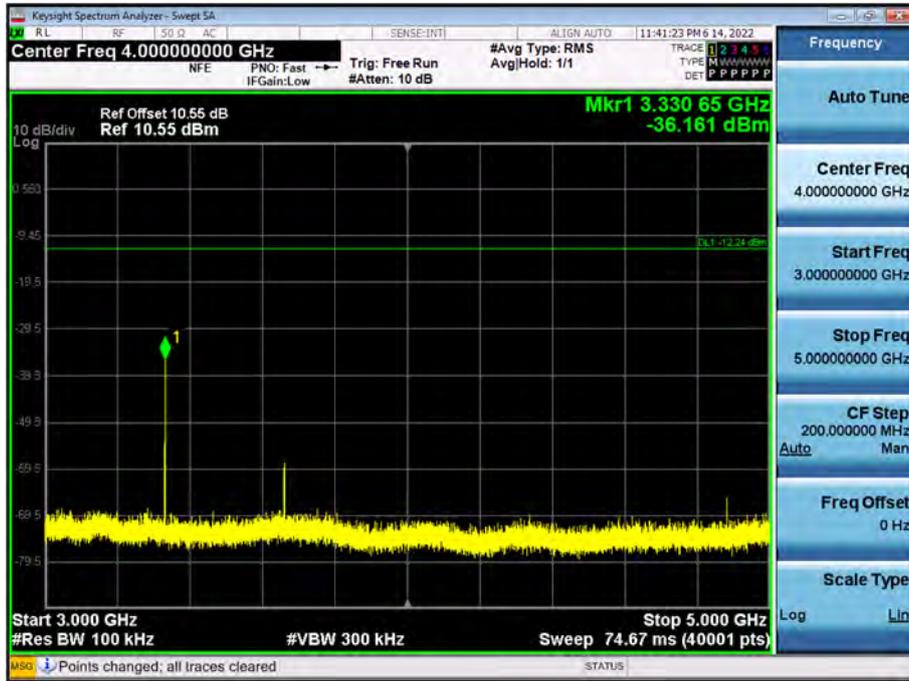

5 GHz ~ 7 GHz


Conducted Spurious Emission (Mid-CH 19)

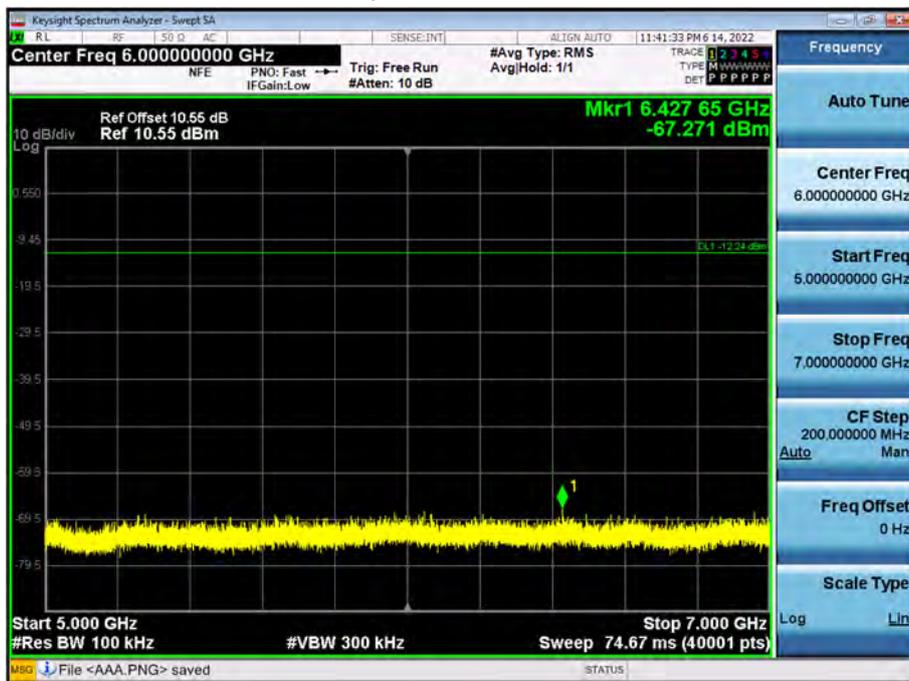




7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

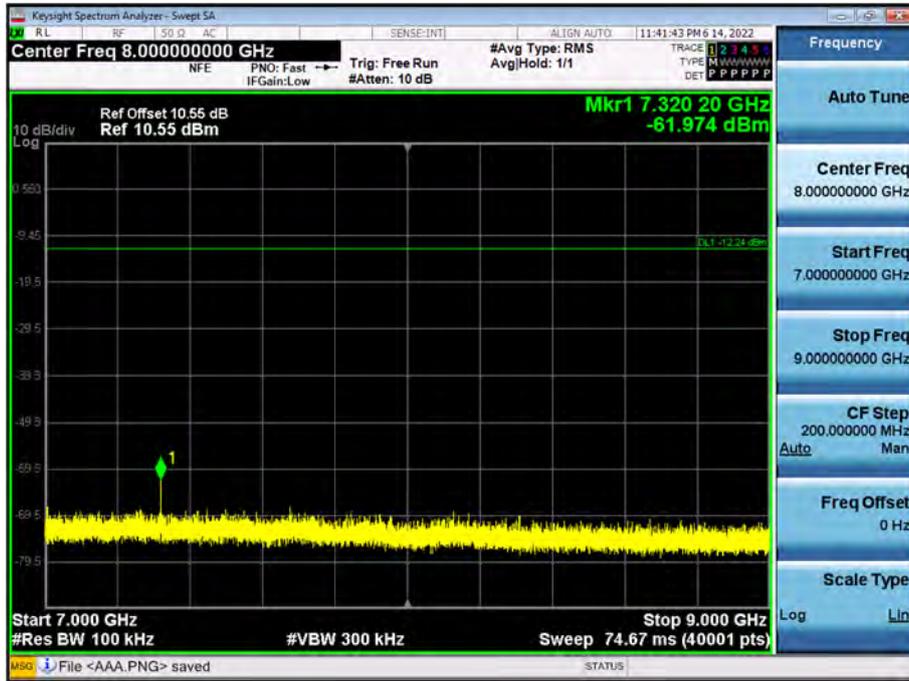


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

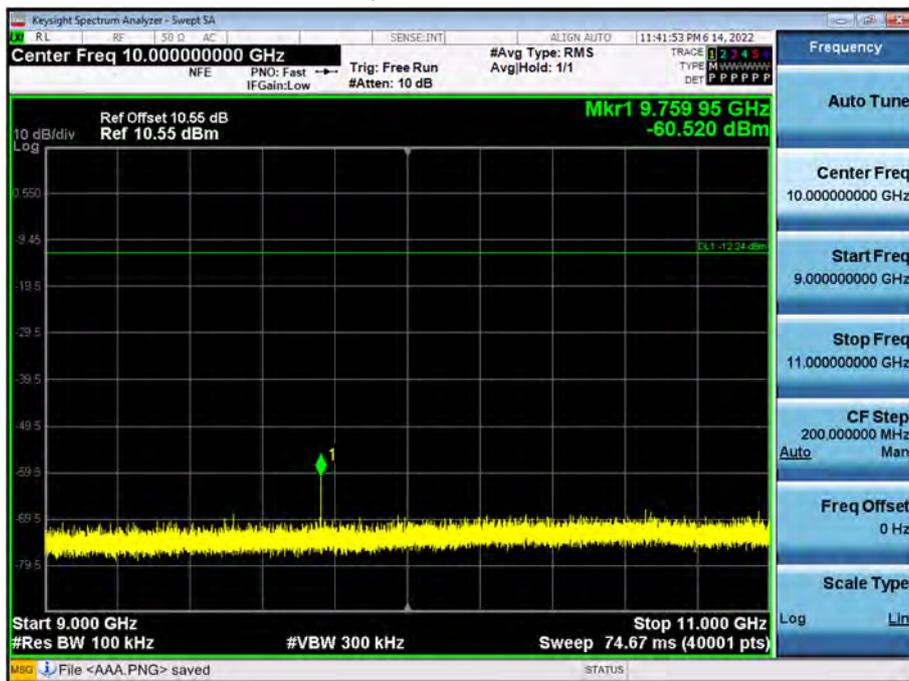


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

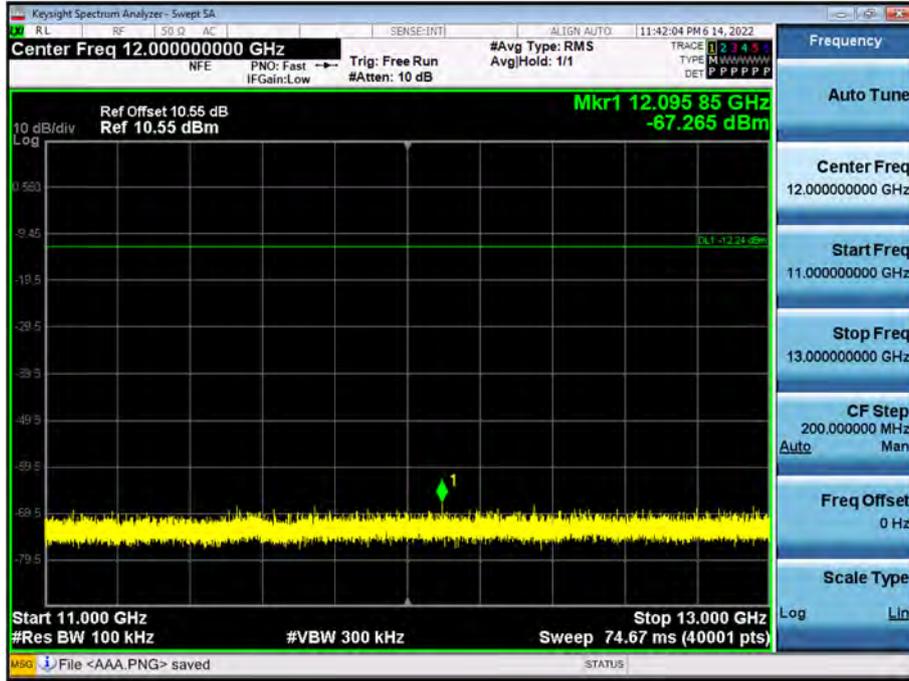


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

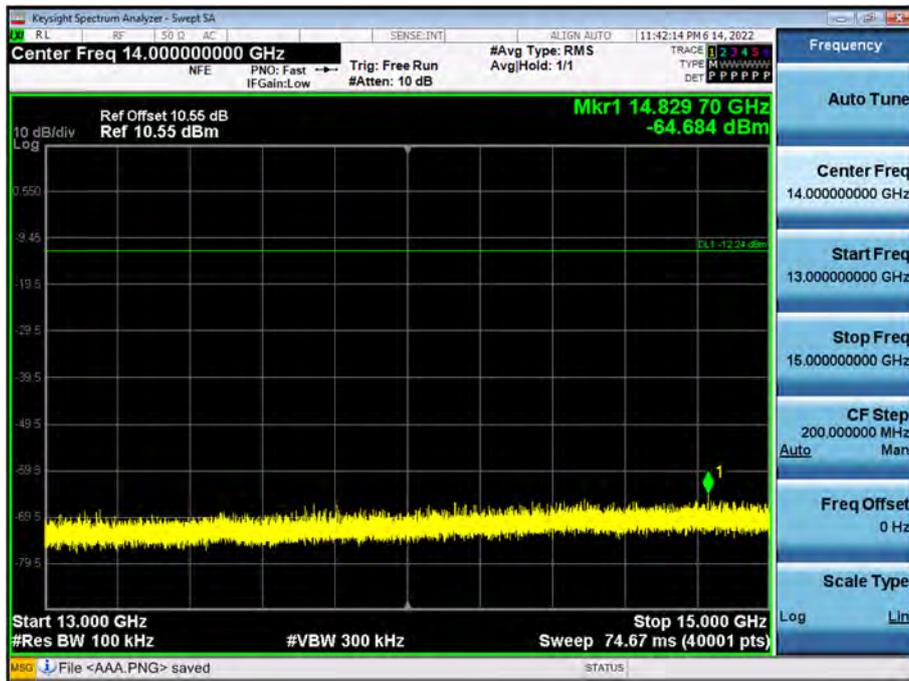


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

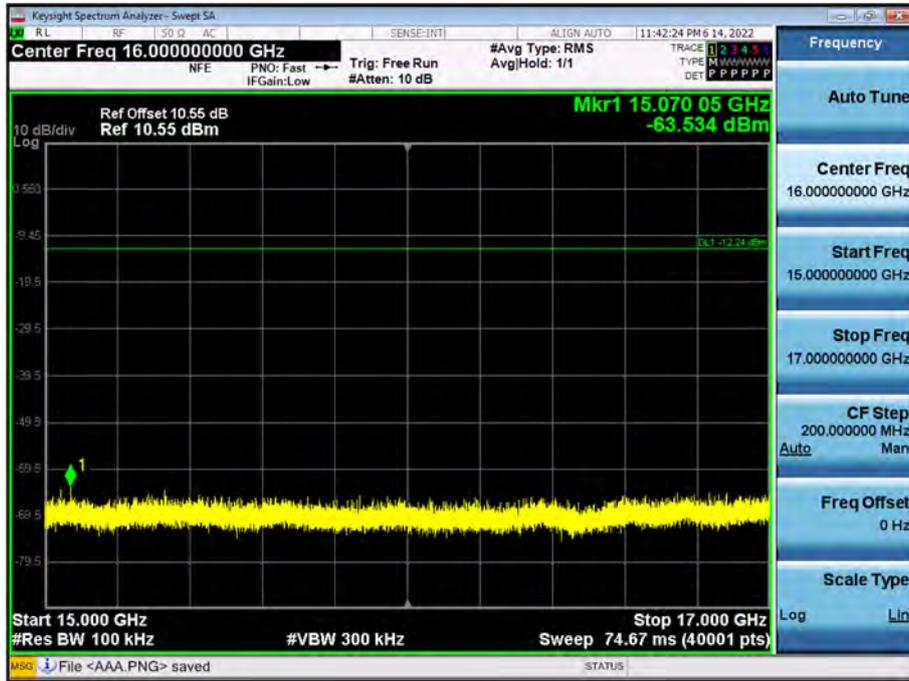

17 GHz ~ 19 GHz


Conducted Spurious Emission (Mid-CH 19)

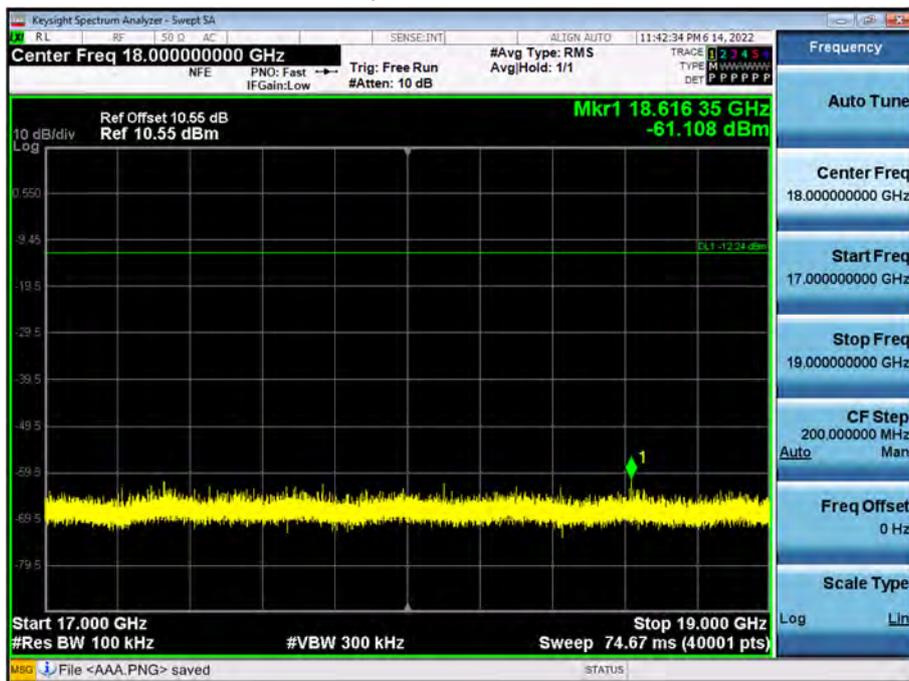




19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

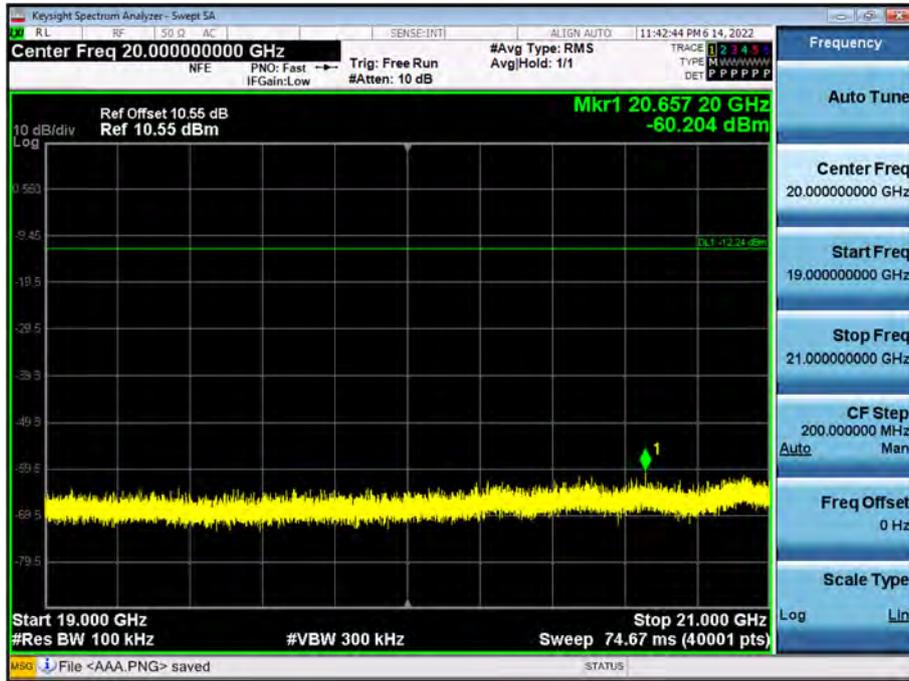

21 GHz ~ 23 GHz


Conducted Spurious Emission (Mid-CH 19)

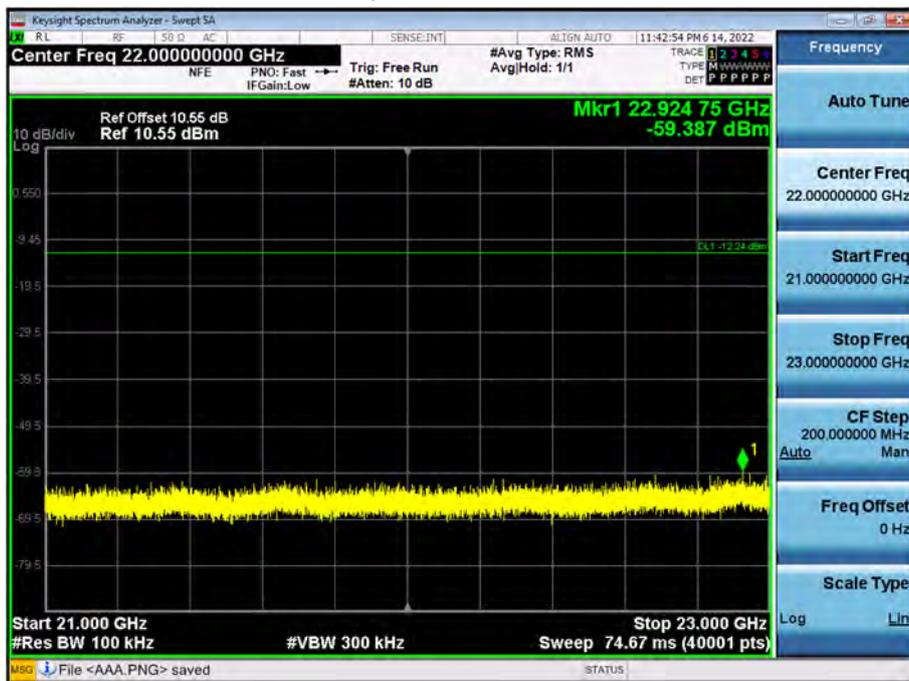



23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

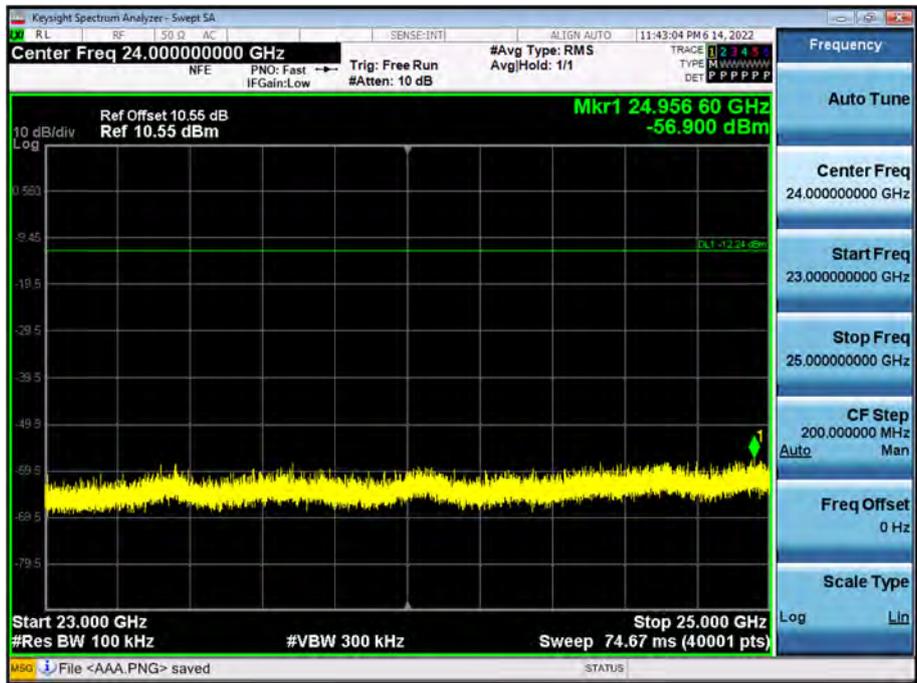

Note :

Limit : -12.24 dBm

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Note:

1. The Measured Level of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1M Bit/s (255 Byte)

Operation Mode: CH Low

Frequency	Measured Level	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4804	43.69	2.56	V	46.25	73.98	27.73	PK
4804	31.68	2.56	V	34.24	53.98	19.74	AV
7206	42.99	8.81	V	51.80	73.98	22.18	PK
7206	33.26	8.81	V	42.07	53.98	11.91	AV
4804	43.29	2.56	H	45.85	73.98	28.13	PK
4804	31.26	2.56	H	33.82	53.98	20.16	AV
7206	43.67	8.81	H	52.48	73.98	21.50	PK
7206	34.05	8.81	H	42.86	53.98	11.12	AV

Operation Mode: CH Mid

Frequency	Measured Level	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4880	42.88	2.72	V	45.60	73.98	28.38	PK
4880	30.26	2.72	V	32.98	53.98	21.00	AV
7320	43.27	9.10	V	52.37	73.98	21.61	PK
7320	31.65	9.10	V	40.75	53.98	13.23	AV
4880	43.00	2.72	H	45.72	73.98	28.26	PK
4880	30.51	2.72	H	33.23	53.98	20.75	AV
7320	43.33	9.10	H	52.43	73.98	21.55	PK
7320	32.92	9.10	H	42.02	53.98	11.96	AV



Operation Mode: CH High

Frequency	Measured Level	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4960	41.58	2.31	V	43.89	73.98	30.09	PK
4960	29.99	2.31	V	32.30	53.98	21.68	AV
7440	41.87	10.21	V	52.08	73.98	21.90	PK
7440	31.58	10.21	V	41.79	53.98	12.19	AV
4960	41.98	2.31	H	44.29	73.98	29.69	PK
4960	30.08	2.31	H	32.39	53.98	21.59	AV
7440	42.77	10.21	H	52.98	73.98	21.00	PK
7440	31.73	10.21	H	41.94	53.98	12.04	AV

Mode : 2M Bit/s (255 Byte)

Operation Mode: CH Low

Frequency	Measured Level	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4804	44.50	2.56	V	47.06	73.98	26.92	PK
4804	31.92	2.56	V	34.48	53.98	19.50	AV
7206	42.75	8.81	V	51.56	73.98	22.42	PK
7206	31.25	8.81	V	40.06	53.98	13.92	AV
4804	43.96	2.56	H	46.52	73.98	27.46	PK
4804	31.75	2.56	H	34.31	53.98	19.67	AV
7206	43.15	8.81	H	51.96	73.98	22.02	PK
7206	31.83	8.81	H	40.64	53.98	13.34	AV

Operation Mode: CH Mid

Frequency	Measured Level	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4880	42.98	2.72	V	45.70	73.98	28.28	PK
4880	30.26	2.72	V	32.98	53.98	21.00	AV
7320	42.04	9.10	V	51.14	73.98	22.84	PK
7320	30.56	9.10	V	39.66	53.98	14.32	AV
4880	43.21	2.72	H	45.93	73.98	28.05	PK
4880	30.42	2.72	H	33.14	53.98	20.84	AV
7320	42.14	9.10	H	51.24	73.98	22.74	PK
7320	30.83	9.10	H	39.93	53.98	14.05	AV




Operation Mode: CH High

Frequency	Measured Level	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4960	41.99	2.31	V	44.30	73.98	29.68	PK
4960	29.87	2.31	V	32.18	53.98	21.80	AV
7440	41.58	10.21	V	51.79	73.98	22.19	PK
7440	29.68	10.21	V	39.89	53.98	14.09	AV
4960	42.37	2.31	H	44.68	73.98	29.30	PK
4960	30.04	2.31	H	32.35	53.98	21.63	AV
7440	41.69	10.21	H	51.90	73.98	22.08	PK
7440	29.74	10.21	H	39.95	53.98	14.03	AV


1M Bit/s 255 Byte Test Plots

Radiated Spurious Emissions plot – Average Result (Ch.0 3rd Harmonic, H)

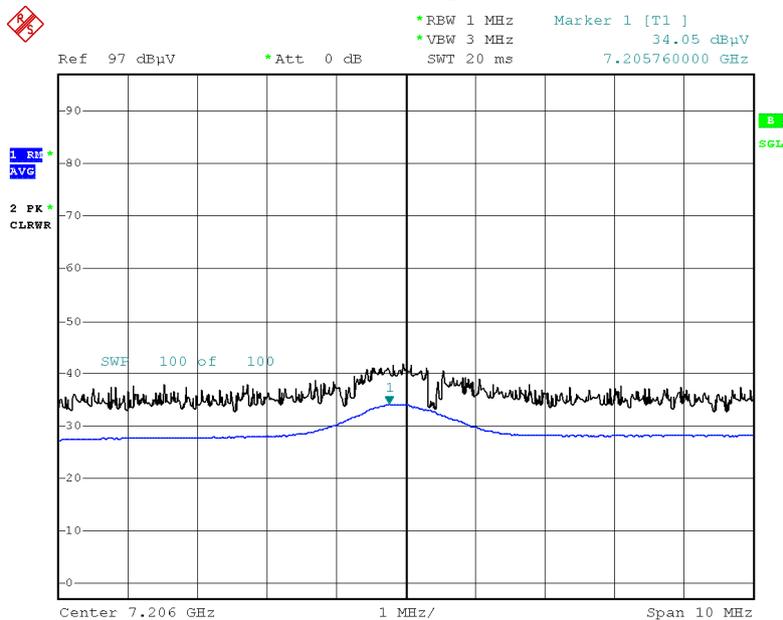

Date: 29.JUN.2022 13:02:37

Radiated Spurious Emissions plot – Peak Result (Ch.0 3rd Harmonic, H)

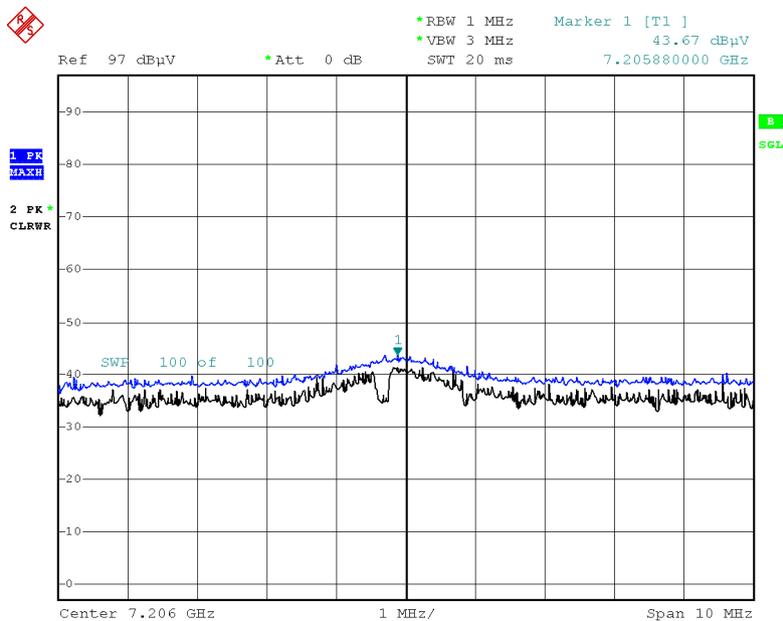

Date: 29.JUN.2022 13:02:53

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Mode : 1 MBit/s (255 Byte)

Operating Frequency 2402 MHz & 2480 MHz
 Channel No. 0 & 39

Frequency	Measured Level	AF+CL+DF	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390.0	22.34	35.43	H	57.76	73.98	16.22	PK
2390.0	10.71	35.43	H	46.14	53.98	7.84	AV
2390.0	22.29	35.43	V	57.71	73.98	16.27	PK
2390.0	10.65	35.43	V	46.08	53.98	7.90	AV
2483.5	23.26	35.57	H	58.82	73.98	15.16	PK
2483.5	11.60	35.57	H	47.17	53.98	6.81	AV
2483.5	23.20	35.57	V	58.76	73.98	15.22	PK
2483.5	11.06	35.57	V	46.62	53.98	7.36	AV

Mode : 2 MBit/s (255 Byte)

Operating Frequency 2402 MHz & 2480 MHz
 Channel No. 0 & 39

Frequency	Measured Level	AF+CL+DF	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390.0	22.32	35.43	H	57.74	73.98	16.24	PK
2390.0	10.77	35.43	H	46.19	53.98	7.79	AV
2390.0	22.19	35.43	V	57.61	73.98	16.37	PK
2390.0	10.72	35.43	V	46.15	53.98	7.83	AV
2483.5	26.05	35.57	H	61.62	73.98	12.36	PK
2483.5	14.56	35.57	H	50.13	53.98	3.85	AV
2483.5	25.92	35.57	V	61.49	73.98	12.49	PK
2483.5	14.45	35.57	V	50.01	53.98	3.97	AV

2M Bit/s (255 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Result (Ch.39, X-H)



Radiated Restricted Band Edges plot – Peak Result (Ch.39, X-H)



Note:

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

9.9 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

Test Report

Common Information

EUT : LGSBWAC97
 Manufacturer : LG Innotek
 Test Site: SHIELD ROOM
 Operating Conditions : BTLE_N Mode
 Operator Name:
 Comment:

Full Spectrum

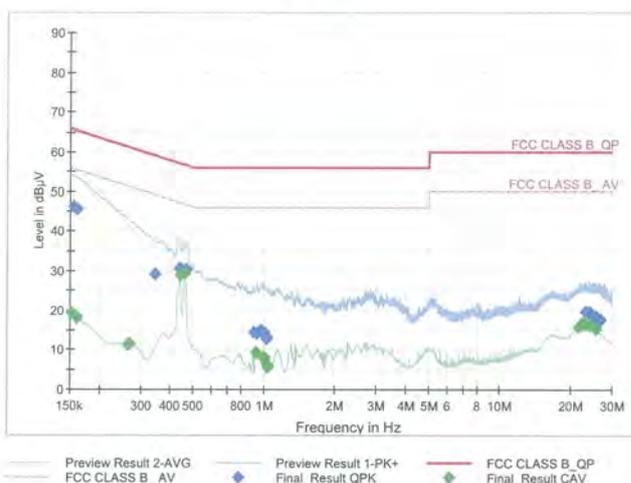

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	46.13	65.75	19.63	9.000	N	OFF	9.6
0.1613	45.48	65.40	19.92	9.000	N	OFF	9.6
0.3435	29.08	59.12	30.04	9.000	N	OFF	9.6
0.4358	30.58	57.14	26.56	9.000	N	OFF	9.6
0.4425	30.67	57.02	26.34	9.000	N	OFF	9.6
0.4695	30.26	56.52	26.26	9.000	N	OFF	9.6
0.9050	14.29	56.00	41.71	9.000	N	OFF	9.6
0.9388	14.14	56.00	41.86	9.000	N	OFF	9.6
0.9748	15.12	56.00	40.88	9.000	N	OFF	9.6
0.9995	14.31	56.00	41.69	9.000	N	OFF	9.6
1.0243	13.35	56.00	42.65	9.000	N	OFF	9.6
1.0310	12.78	56.00	43.22	9.000	N	OFF	9.6
23.1553	19.63	60.00	40.37	9.000	N	OFF	9.9
23.9023	19.34	60.00	40.66	9.000	N	OFF	9.9
24.3455	19.19	60.00	40.81	9.000	N	OFF	9.9
25.3873	18.48	60.00	41.52	9.000	N	OFF	9.9
25.6730	18.52	60.00	41.48	9.000	N	OFF	9.9
26.8678	17.74	60.00	42.26	9.000	N	OFF	9.9

2022-07-14

오후 3:08:19



Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	19.23	55.88	36.64	9.000	N	OFF	9.6
0.1613	18.24	55.40	37.16	9.000	N	OFF	9.6
0.2625	11.39	51.35	39.96	9.000	N	OFF	9.6
0.2693	11.63	51.14	39.51	9.000	N	OFF	9.6
0.4403	28.91	47.06	18.14	9.000	N	OFF	9.6
0.4605	29.44	46.68	17.25	9.000	N	OFF	9.6
0.9298	9.26	46.00	36.74	9.000	N	OFF	9.6
0.9995	8.05	46.00	37.95	9.000	N	OFF	9.6
1.0063	7.70	46.00	38.30	9.000	N	OFF	9.6
1.0288	6.20	46.00	39.80	9.000	N	OFF	9.6
1.0333	5.80	46.00	40.20	9.000	N	OFF	9.6
1.0378	5.57	46.00	40.43	9.000	N	OFF	9.6
21.6253	15.93	50.00	34.07	9.000	N	OFF	9.9
22.2530	16.50	50.00	33.50	9.000	N	OFF	9.9
22.6040	16.71	50.00	33.29	9.000	N	OFF	9.9
23.2880	16.52	50.00	33.48	9.000	N	OFF	9.9
24.3478	16.12	50.00	33.88	9.000	N	OFF	9.9
25.6730	15.18	50.00	34.82	9.000	N	OFF	9.9

2022-07-14

오후 3:08:19

Conducted Emissions (Line 2)

Test


1 / 2

Test Report

Common Information

EUT : LGSBWAC97
 Manufacturer : LG Innotek
 Test Site: SHIELD ROOM
 Operating Conditions : BTLE_L1 Mode
 Operator Name:
 Comment:

Full Spectrum

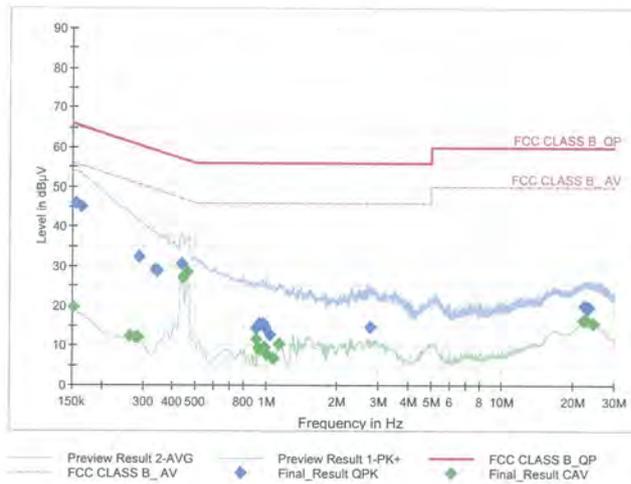

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	45.76	65.75	19.99	9.000	L1	OFF	9.6
0.1635	45.02	65.28	20.27	9.000	L1	OFF	9.6
0.2895	32.36	60.54	28.18	9.000	L1	OFF	9.6
0.3390	29.16	59.23	30.07	9.000	L1	OFF	9.6
0.3458	28.82	59.06	30.24	9.000	L1	OFF	9.6
0.4380	30.72	57.10	26.38	9.000	L1	OFF	9.6
0.9050	14.47	56.00	41.53	9.000	L1	OFF	9.6
0.9410	15.51	56.00	40.49	9.000	L1	OFF	9.6
0.9680	15.44	56.00	40.56	9.000	L1	OFF	9.6
0.9973	14.35	56.00	41.65	9.000	L1	OFF	9.6
1.0355	12.83	56.00	43.17	9.000	L1	OFF	9.6
2.7568	14.71	56.00	41.29	9.000	L1	OFF	9.7
22.4083	20.01	60.00	39.99	9.000	L1	OFF	9.9
22.6828	19.62	60.00	40.38	9.000	L1	OFF	9.9
22.9753	19.48	60.00	40.52	9.000	L1	OFF	9.9
22.9865	19.66	60.00	40.34	9.000	L1	OFF	9.9
23.1215	19.76	60.00	40.24	9.000	L1	OFF	9.9
23.3938	19.62	60.00	40.38	9.000	L1	OFF	9.9

2022-07-14

오후 3:16:13



Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	19.64	55.88	36.23	9.000	L1	OFF	9.6
0.2625	12.39	51.35	38.96	9.000	L1	OFF	9.6
0.2783	12.18	50.87	38.69	9.000	L1	OFF	9.6
0.2850	12.13	50.67	38.54	9.000	L1	OFF	9.6
0.4403	27.15	47.06	19.91	9.000	L1	OFF	9.6
0.4605	28.67	46.68	18.01	9.000	L1	OFF	9.6
0.9028	11.47	46.00	34.53	9.000	L1	OFF	9.6
0.9298	9.37	46.00	36.63	9.000	L1	OFF	9.6
0.9793	9.44	46.00	36.56	9.000	L1	OFF	9.6
1.0085	7.85	46.00	38.15	9.000	L1	OFF	9.6
1.0760	6.74	46.00	39.26	9.000	L1	OFF	9.6
1.1368	10.45	46.00	35.55	9.000	L1	OFF	9.6
22.1900	16.37	50.00	33.63	9.000	L1	OFF	9.9
22.8223	16.32	50.00	33.68	9.000	L1	OFF	9.9
22.9213	16.43	50.00	33.57	9.000	L1	OFF	9.9
22.9865	16.44	50.00	33.56	9.000	L1	OFF	9.9
24.5908	15.59	50.00	34.41	9.000	L1	OFF	9.9
24.6335	15.64	50.00	34.36	9.000	L1	OFF	9.9

2022-07-14

오후 3:16:13

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/07/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	03/24/2023	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/24/2023	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/03/2023	Annual
DC Power Supply	E3646A	Agilent	MY40002937	12/14/2022	Annual
Attenuator(10 dB) (DC-26.5 GHz)	5910-N-50-010	H+S	00801	10/29/2022	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/07/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/22/2023	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5- 2370/2520-60/12SS	Wainwright Instruments	2	01/06/2023	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
Band Reject Filter	WRCJV5100/5850- 40/50-8EEK	Wainwright Instruments	1	02/07/2023	Annual
ATT(3 dB) + LNA2(6~18 GHz)	18B-03, CBL06185030	WEINSCHL CERNEX	N/A	12/22/2022	Annual
ATT(10 dB) + LNA1(0.1~18 GHz)	56-10, CBLU1183540B-01	Api tech, CERNEX	N/A	12/22/2022	Annual
High Pass Filter	WHKX10-2700-3000- 18000-40SS	Wainwright Instruments	N/A	12/22/2022	Annual
High Pass Filter	WHKX8-6090-7000- 18000-40SS	Wainwright Instruments	N/A	12/22/2022	Annual
Thru	COAXIAL ATTENUATOR	T&M SYSTEM	N/A	12/22/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	04/05/2023	Annual
Spectrum Analyzer	FSP(9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/13/2022	Annual
Spectrum Analyzer	FSV40-N(9 kHz ~ 30 GHz)	Rohde & Schwarz	101068-SZ	09/15/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2207-FI014-P