



TEST REPORT

FCC/IC BT LE Test for LGSBWAX12
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2009-FI006

DATE OF ISSUE
10 September 2020

Tested by
Jin Gwan Lee

Technical Manager
Jong Seok Lee

Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
Soo Chan Lee
SooChan Lee / CEO

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



TEST REPORT

FCC/IC BT LE Test
for LGSBWAX12

REPORT NO.
HCT-RF-2009-FI006

DATE OF ISSUE
September 10, 2020

Additional Model
-

Applicant **LG Electronics Inc.**
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Eut Type	RF Module
Model Name	LGSBWAX12
FCC ID	BEJLGSBWAX12
IC	2703H-LGSBWAX12
Max. RF Output Power	7.788 dBm (6.01 mW)
Modulation type	GFSK
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s)	Part 15.247
IC Rule Part(s)	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	September 10, 2020	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 AND KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	29
9. TEST RESULT	31
9.1 DUTY CYCLE	31
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	36
9.3 OUTPUT POWER	54
9.4 POWER SPECTRAL DENSITY	56
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	59
9.6 RADIATED SPURIOUS EMISSIONS	76
9.6.1 Basic Cable	76
9.6.2 FFC Cable	83
9.7 RADIATED RESTRICTED BAND EDGES	87
9.7.1 Basic Cable	87
9.7.2 FFC Cable	90
9.8 RECEIVER SPURIOUS EMISSIONS	93
9.8.1 Basic Cable	93
9.8.2 FFC Cable	94
9.9 POWERLINE CONDUCTED EMISSIONS	95
9.9.1 Basic Cable	95
9.9.2 FFC Cable	99
10. LIST OF TEST EQUIPMENT	103
11. ANNEX A_ TEST SETUP PHOTO	105

1. EUT DESCRIPTION

Model	LGSBWAX12	
Additional Model	-	
EUT Type	RF Module	
Power Supply	DC 3.30 V	
Frequency Range	2402 MHz - 2480 MHz	
Max. RF Output Power	Peak	125k Bit/s : 7.467 dBm (5.58 mW) 500k Bit/s : 7.621 dBm (5.78 mW) 1M Bit/s : 7.788 dBm (6.01 mW) 2M Bit/s : 7.594 dBm (5.75 mW)
	Average	125k Bit/s : 7.09 dBm (5.12 mW) 500k Bit/s : 7.22 dBm (5.27 mW) 1M Bit/s : 6.99 dBm (5.00 mW) 2M Bit/s : 7.29 dBm (5.36 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna type	Metal press	
Antenna Peak Gain	1.19 dBi	
Date(s) of Tests	July 02, 2020 ~ August 31, 2020	
PMN (Product Marketing Number)	LGSBWAX12	
HVIN (Hardware Version Identification Number)	ETWCHMBC01	
FVIN (Firmware Version Identification Number)	MT7921_V1.0	
HMN (Host Marketing Name)	N/A	
EUT serial numbers	ETWCHMBC01-01, ETWCHMBC01-02, ETWCHMBC01-03, ETWCHMBC01-04	
EUT Cable Type.	Basic Cable Type, FFC Cable Type	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203 / RSS-Gen(Issue 5) Section 8:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

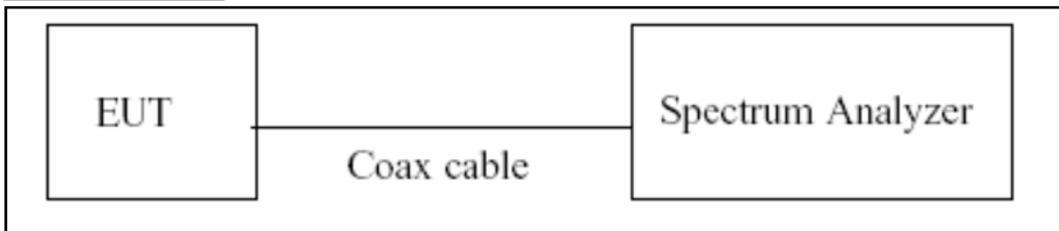

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/Duty\ Cycle)$

7.2. 6dB Bandwidth & 99 % Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

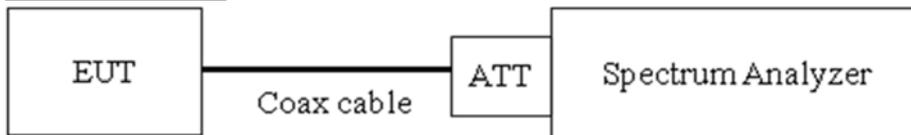

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for IC)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW $\approx 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

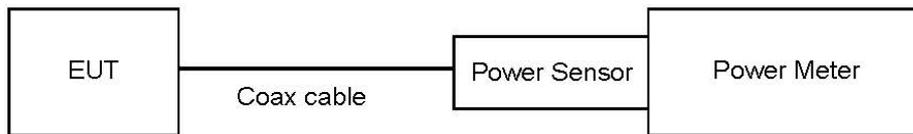

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3 kHz BW.

Test Configuration

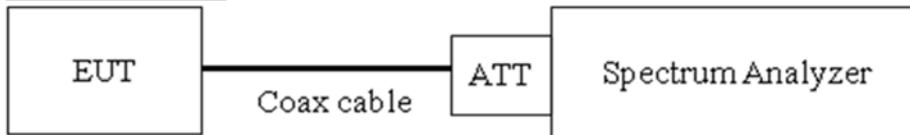

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration

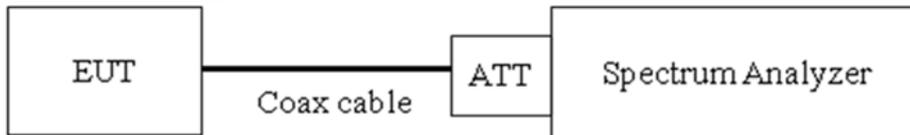

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	19.94
100	19.98
200	20.02
300	20.09
400	20.12
500	20.10
600	20.13
700	20.15
800	20.17
900	20.19
1000	20.21
2000	20.36
2400	20.41
2437	20.48
2500	20.80
3000	21.32
4000	21.56
5000	21.88
6000	21.99
7000	22.09
8000	22.15
9000	22.22
10000	22.27
11000	22.30
12000	22.35
13000	22.41
14000	22.42
15000	22.45
16000	22.51
17000	22.52
18000	22.57
19000	22.59
20000	22.63
21000	22.76
22000	22.75
23000	22.19
24000	22.24
25000	22.35

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20dB) + Cable loss

7.6. Radiated Test

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&IC


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

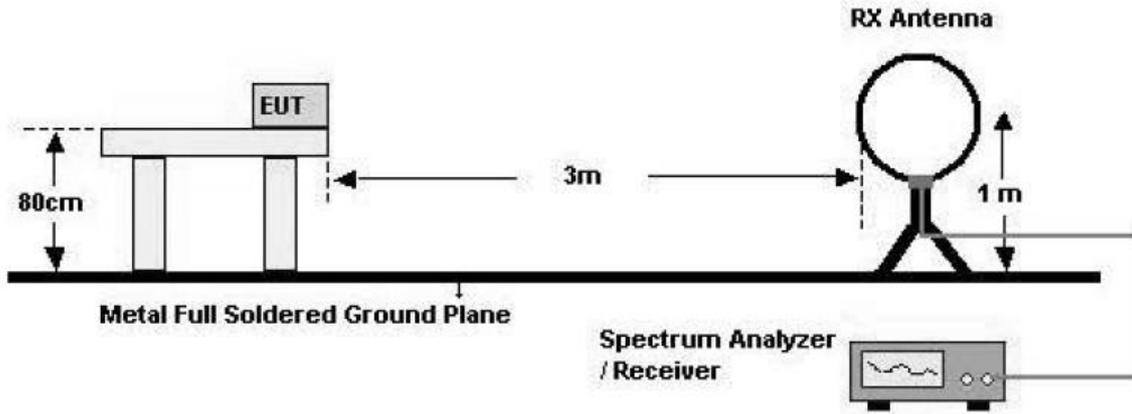

30 MHz - 1 GHz

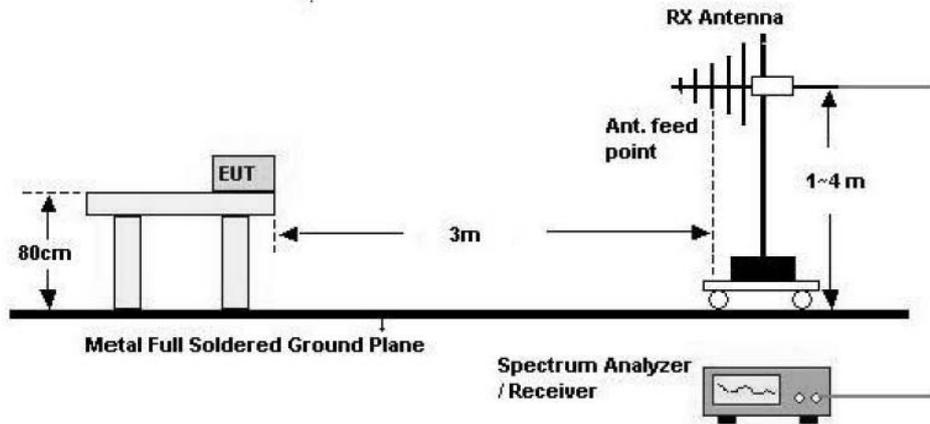

Above 1 GHz

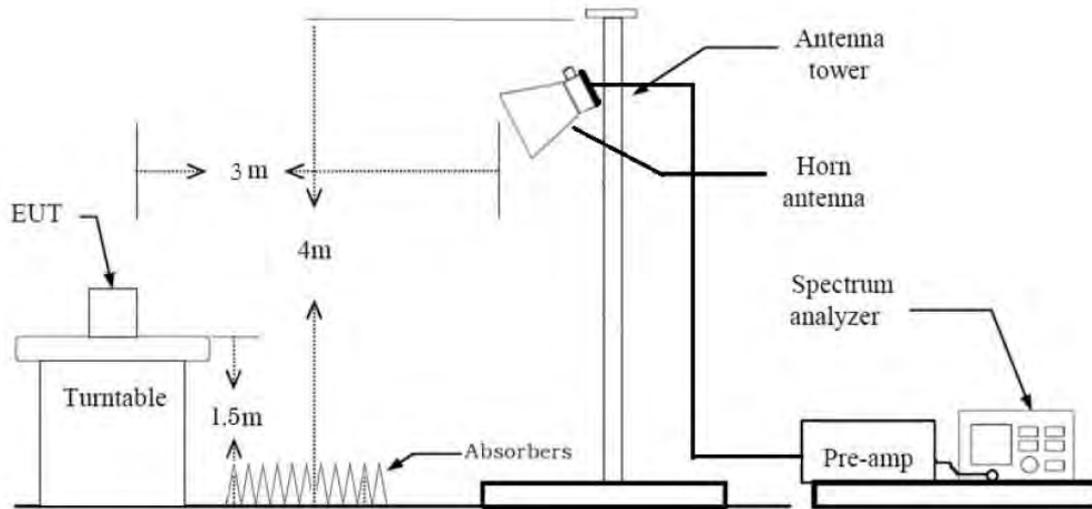

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered

that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz

In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total (Measurement Type : Peak)

= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance

Factor(D.F)

Total (Measurement Type : Average)

= Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

+ Distance Factor(D.F) + Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had

the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak

= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

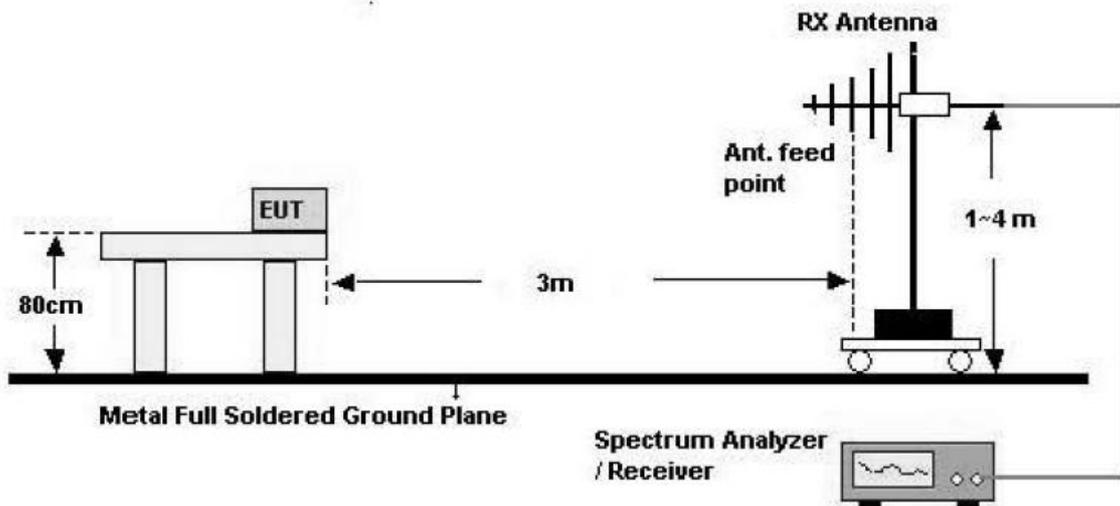

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

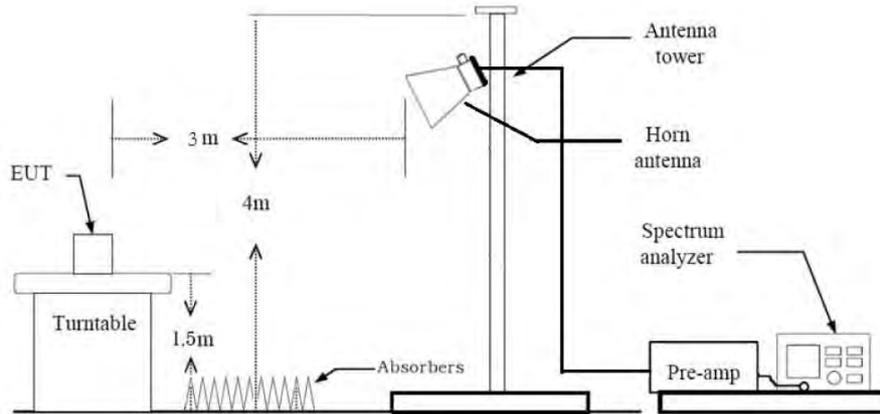

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

7.9. Worst case configuration and mode

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone
 - Worstcase : Stand alone
2. EUT Axis:
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : Y
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.
(Worst case : 1M 255Bytes, 2M 37Byte)
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook
 - Worstcase : Stand alone + Notebook

Conducted test

1. The EUT was configured with packet length of highest power.
(Worst case : 1M 255Bytes, 2M 37Byte)

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

IC Part

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	NA		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.4	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 5, 6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 7		PASS


9. TEST RESULT

9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
125k	37	3.0900	3.7500	0.8240	0.84
	255	17.0500	17.5000	0.9743	0.11
500k	37	1.0567	1.8733	0.5641	2.49
	255	4.5400	5.0000	0.9080	0.42
1M	37	0.3787	0.6257	0.6053	2.18
	255	2.1250	2.5000	0.8500	0.71
2M	37	0.1951	0.6257	0.3117	5.06
	255	1.0650	1.8750	0.5680	2.46

☐ 125k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

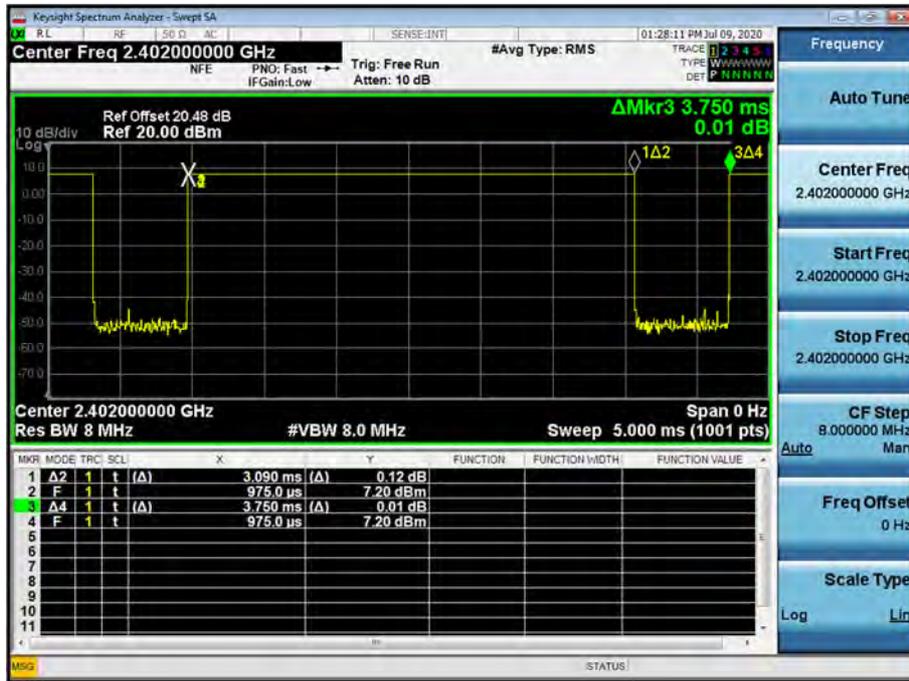


☐ 125k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)



☐ 500k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

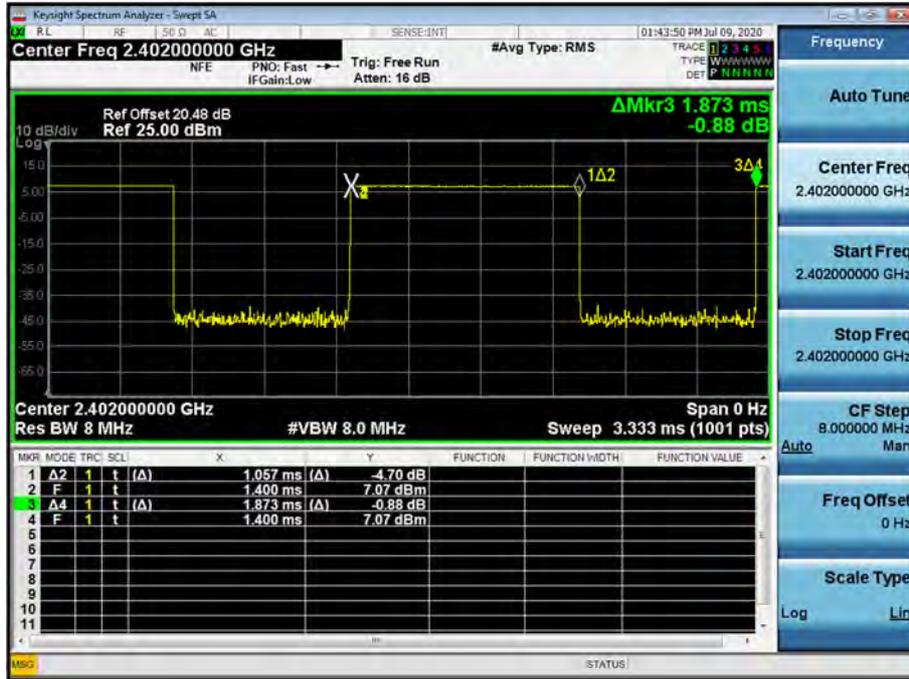


☐ 500k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)



▣ 1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

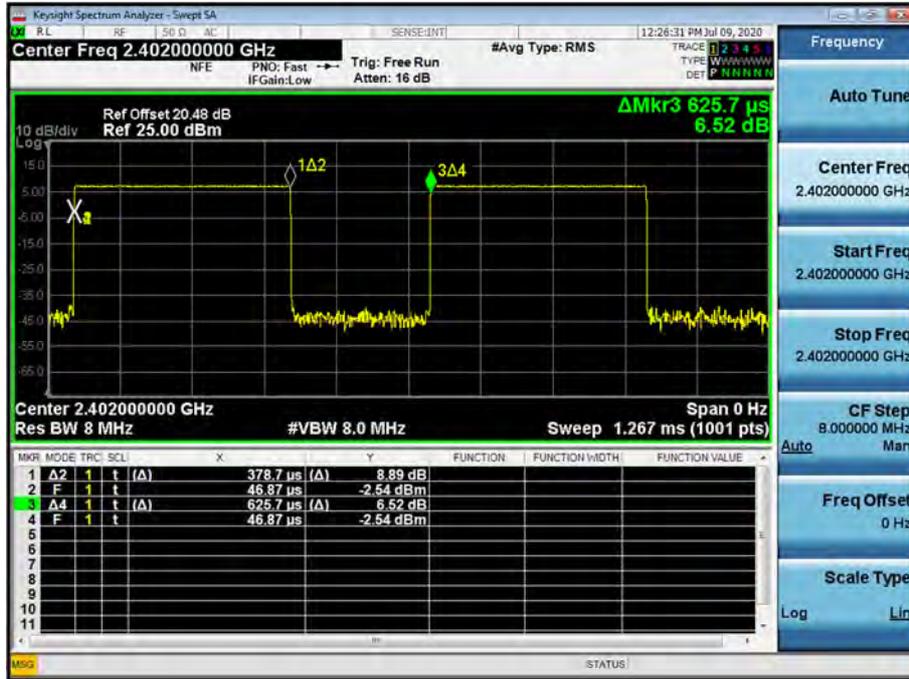


▣ 1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)




2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

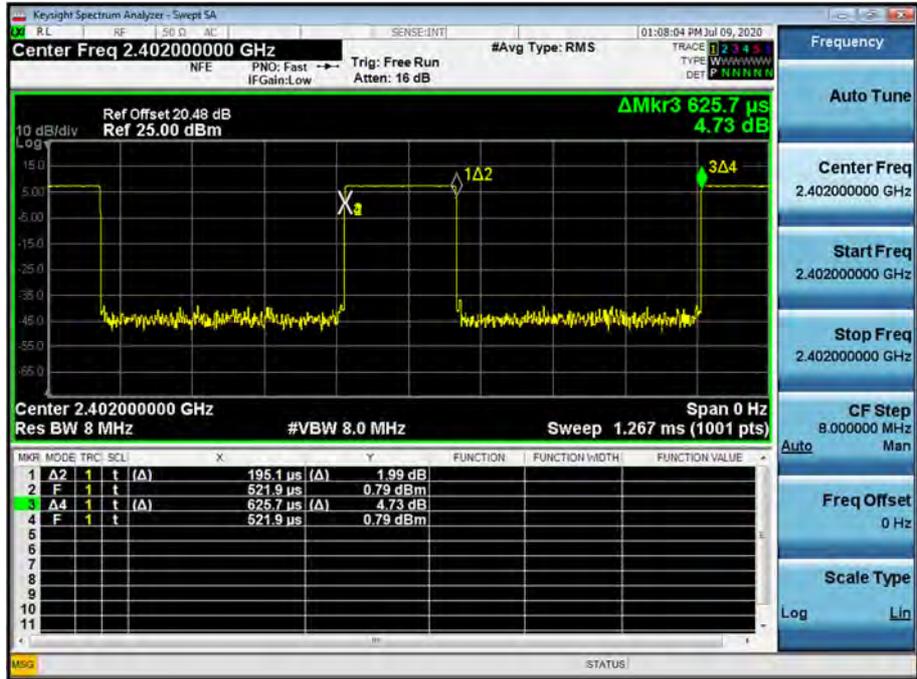

2M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

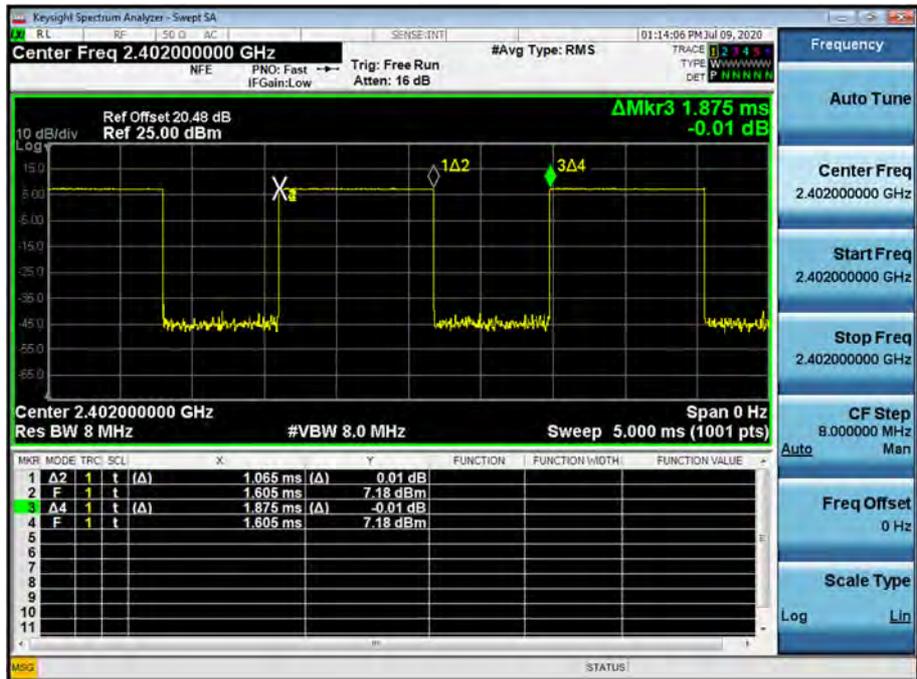

9.2 6dB BANDWIDTH & 99 % BANDWIDTH

FCC

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
125k	0	698.7	> 500
	19	690.4	
	39	702.9	
500k	0	666.5	> 500
	19	670.1	
	39	666.7	
1M	0	662.2	> 500
	19	663.0	
	39	668.4	
2M	0	1244.5	> 500
	19	1246.4	
	39	1240.6	

125k Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)




500k Bit/s(255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)

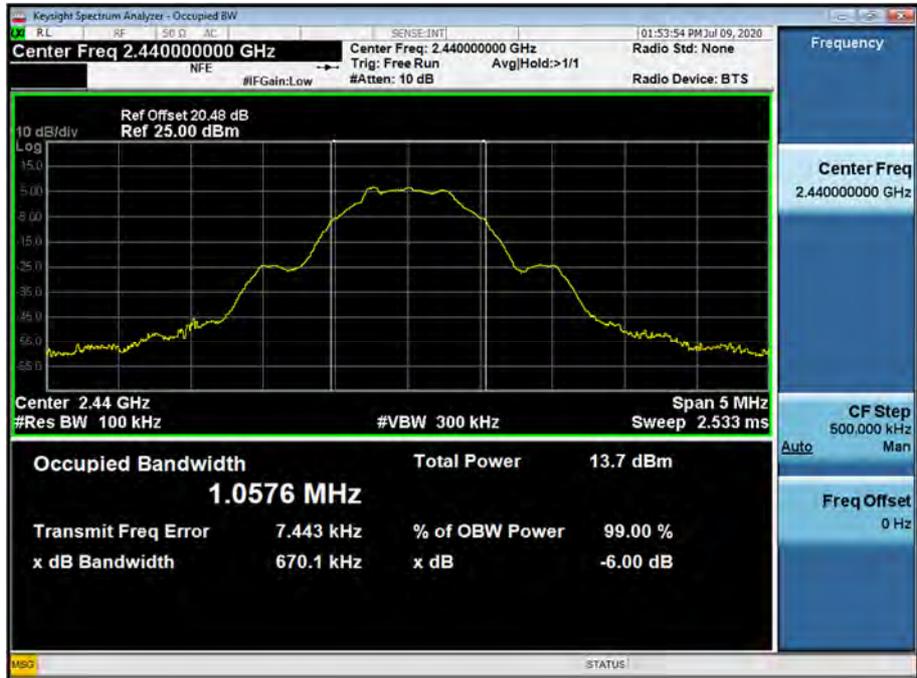

6 dB Bandwidth plot (High-CH 39)



☐ 1M Bit/s (255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



▣ 2M Bit/s (37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



IC

Mode (Bit/s)	Packet length (Byte)	Channel	99 % Bandwidth (kHz)
125k	37	0	1052.9
		19	1052.5
		39	1051.8
500k	255	0	1034.4
		19	1029.3
		39	1033.6
1M	255	0	1033.1
		19	1025.6
		39	1032.6
2M	37	0	2079.9
		19	2078.5
		39	2078.9

125k Bit/s(37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)



☐ 500k Bit/s(255 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)



1M Bit/s (255 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)



☐ 2M Bit/s (37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)



9.3 OUTPUT POWER

Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
125k	37	2402	0	7.420	30
		2440	19	7.385	
		2480	39	7.467	
	255	2402	0	7.353	
		2440	19	7.307	
		2480	39	7.246	
500k	37	2402	0	7.563	
		2440	19	7.601	
		2480	39	7.532	
	255	2402	0	7.621	
		2440	19	7.432	
		2480	39	7.508	
1M	37	2402	0	7.534	
		2440	19	7.696	
		2480	39	7.523	
	255	2402	0	7.546	
		2440	19	7.788	
		2480	39	7.410	
2M	37	2402	0	7.594	
		2440	19	7.410	
		2480	39	7.306	
	255	2402	0	7.458	
		2440	19	7.304	
		2480	39	7.327	

Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
125k	37	2402	0	6.25	0.84	7.09	30
		2440	19	6.06	0.84	6.90	
		2480	39	5.98	0.84	6.82	
	255	2402	0	6.94	0.11	7.06	
		2440	19	6.83	0.11	6.94	
		2480	39	6.83	0.11	6.95	
500k	37	2402	0	4.38	2.49	6.87	
		2440	19	4.33	2.49	6.82	
		2480	39	4.74	2.49	7.22	
	255	2402	0	6.69	0.42	7.11	
		2440	19	6.37	0.42	6.79	
		2480	39	6.46	0.42	6.88	
1M	37	2402	0	4.78	2.18	6.96	
		2440	19	4.81	2.18	6.99	
		2480	39	4.68	2.18	6.86	
	255	2402	0	6.25	0.71	6.96	
		2440	19	6.24	0.71	6.95	
		2480	39	6.13	0.71	6.84	
2M	37	2402	0	1.89	5.06	6.95	
		2440	19	1.87	5.06	6.93	
		2480	39	2.23	5.06	7.29	
	255	2402	0	4.48	2.46	6.93	
		2440	19	4.25	2.46	6.71	
		2480	39	4.49	2.46	6.95	

Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.48 dB is offset for 2.4 GHz Band.

9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm)
2402	0	125k 37 Byte	1.102	8
2440	19		1.016	
2480	39		0.993	
2402	0	500k 255 Byte	1.057	
2440	19		0.854	
2480	39		0.899	
2402	0	1M 255 Byte	-9.222	
2440	19		-8.893	
2480	39		-8.967	
2402	0	2M 37 Byte	-10.183	
2440	19		-10.361	
2480	39		-11.445	

Note :

1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.48 dB is offset for 2.4 GHz Band.
4. The plot included is the worst mode(125k Bit/s (37 Byte)) of peak output power.

125k Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



Power Spectral Density (High-CH 39)



9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

1M Bit/s (255 Byte) Test Plots -BandEdge

Low-CH 0



High-CH 39

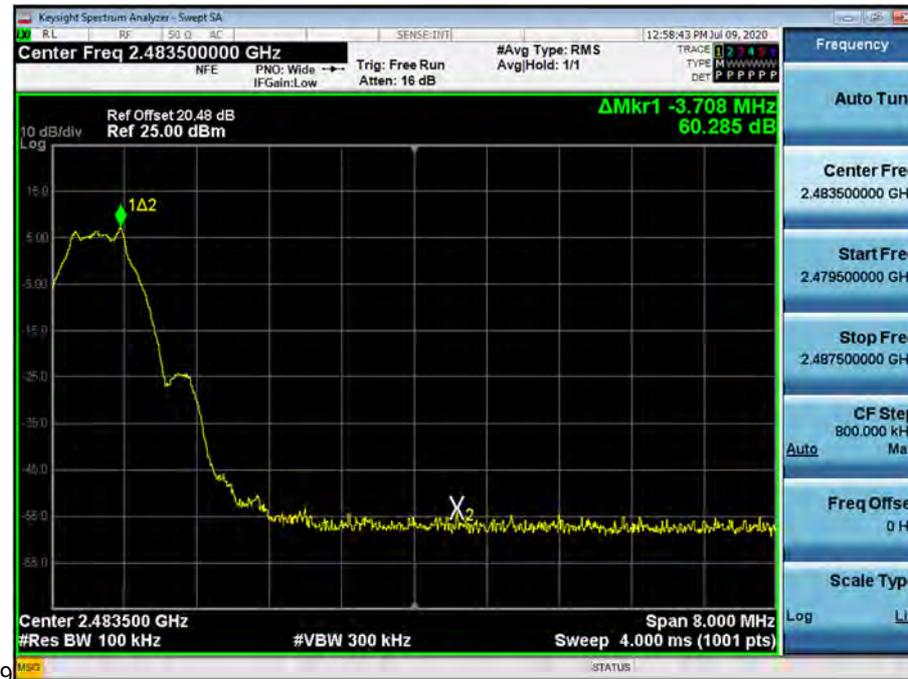


9

▣ 1M Bit/s (255 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

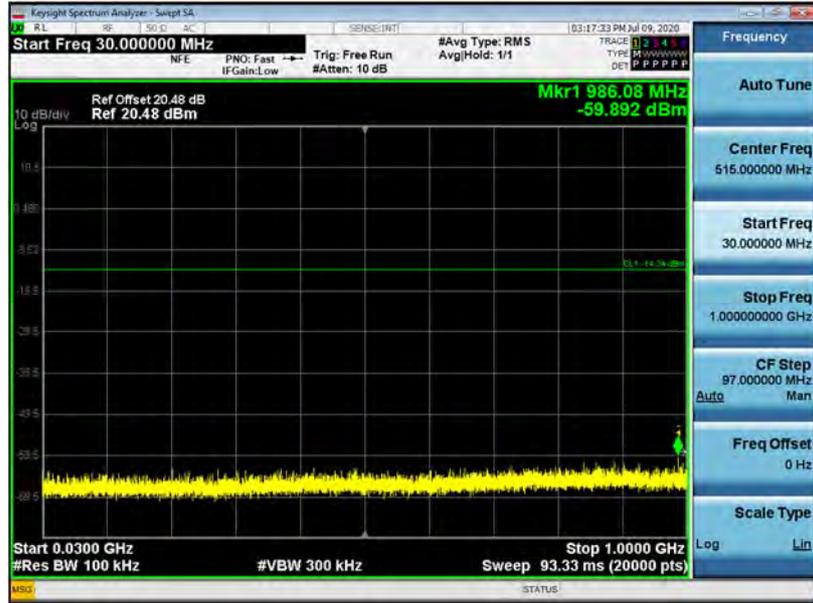


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

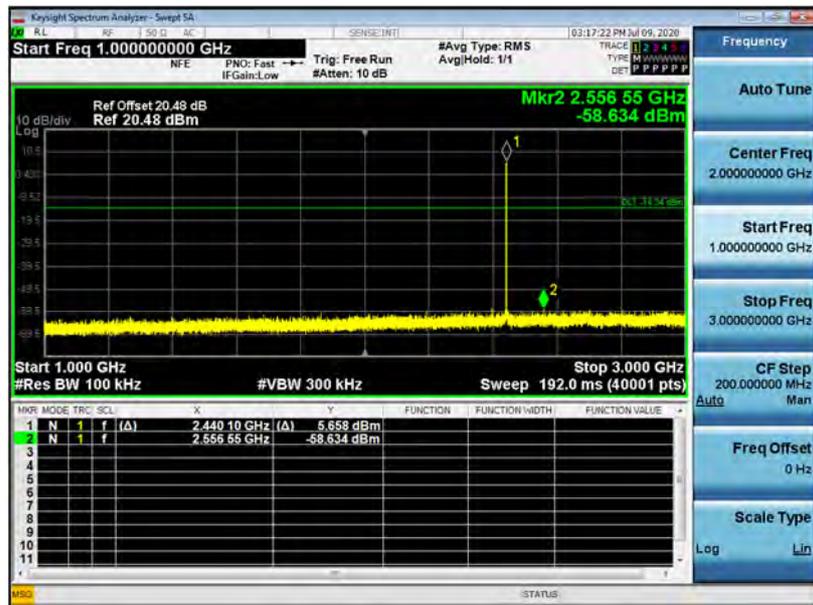

3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

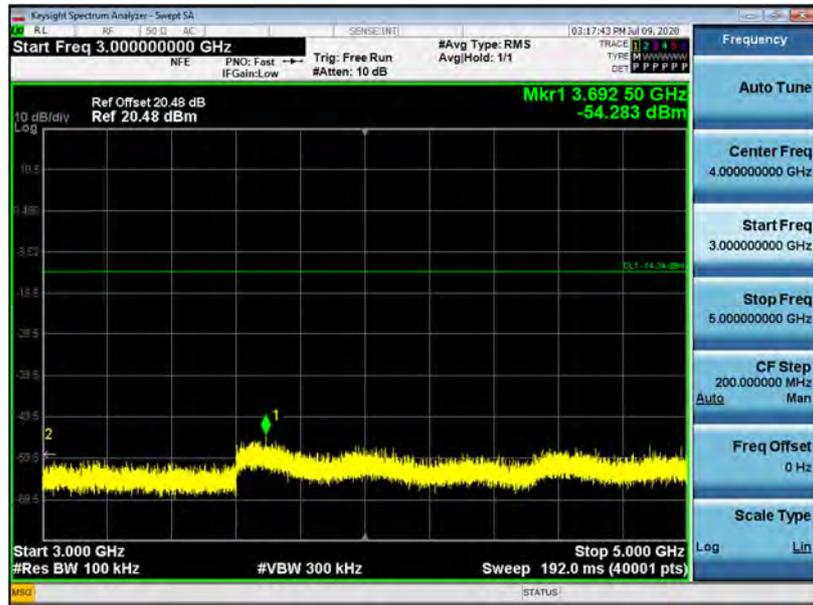


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)




7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

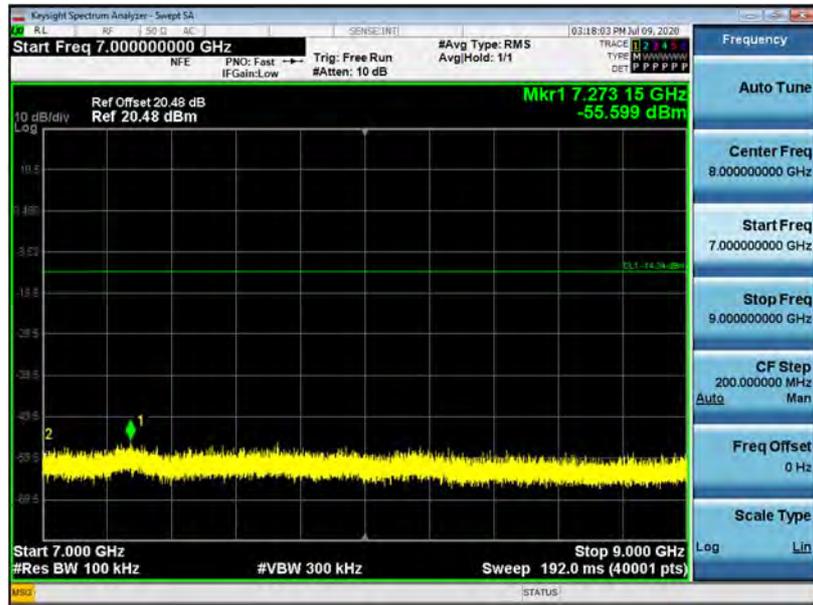


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

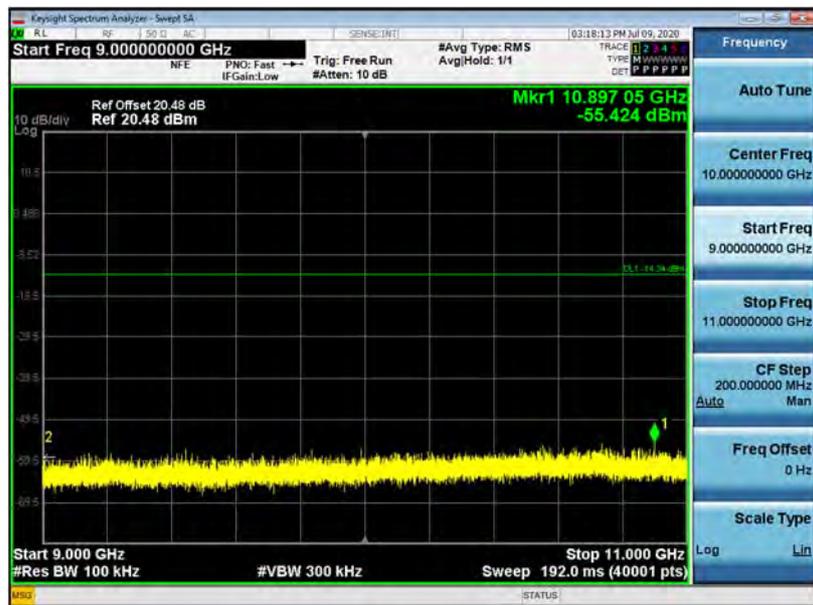


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

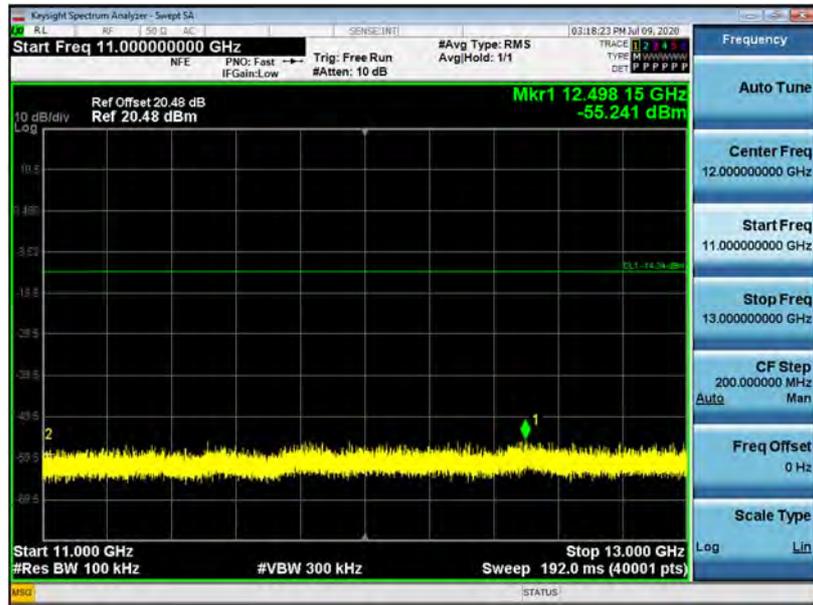


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

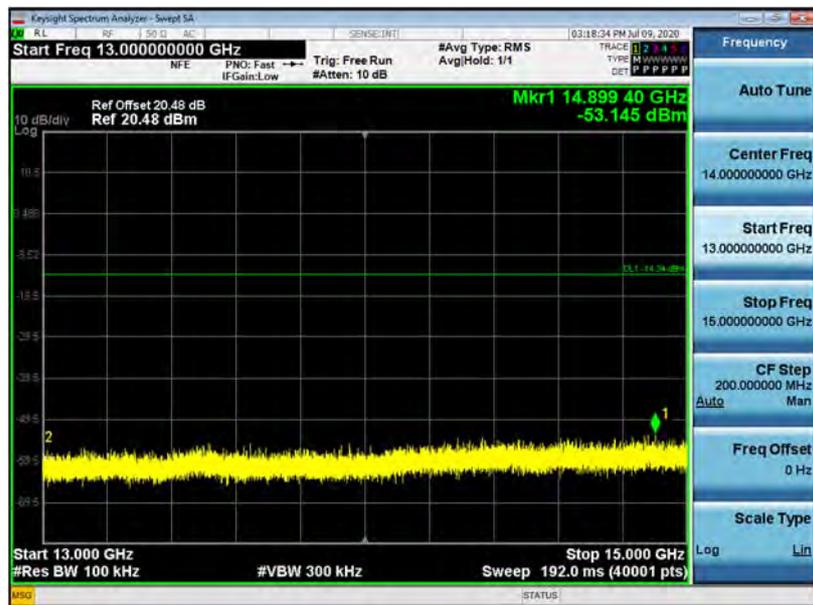

15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

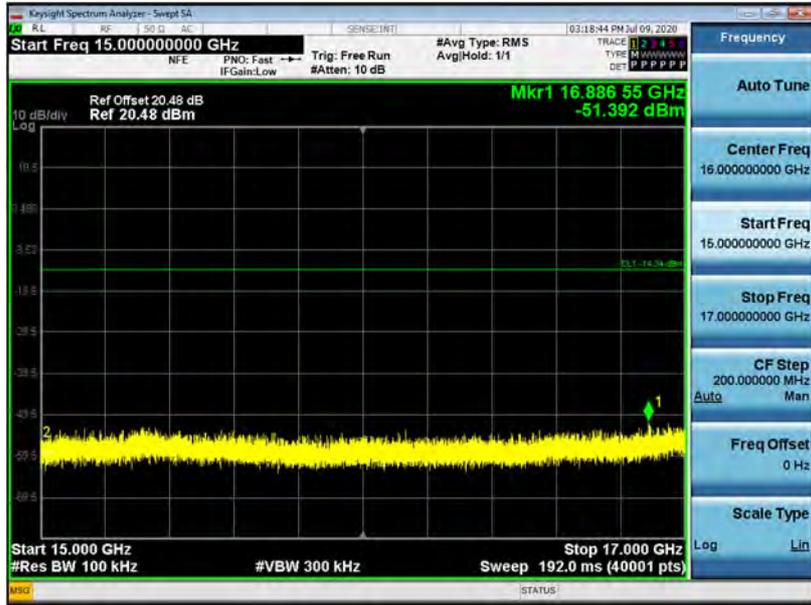


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)




19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

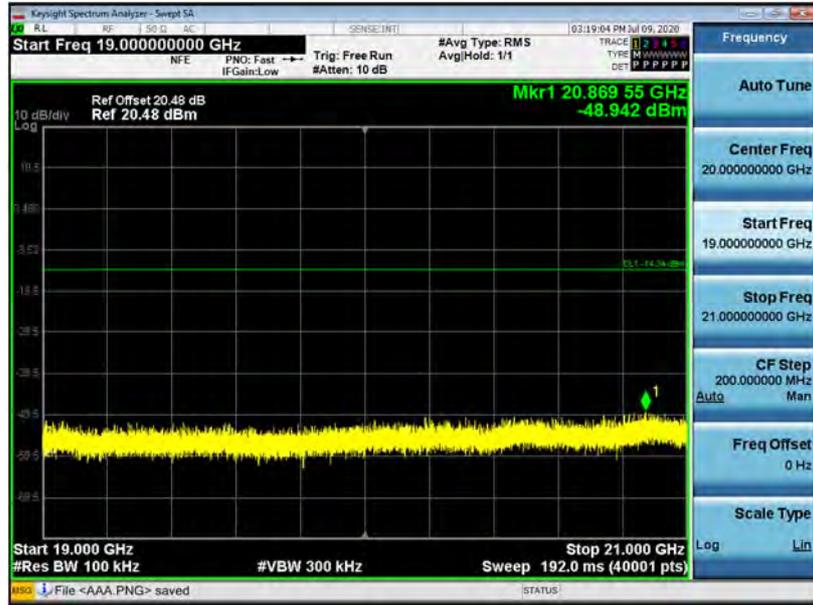


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

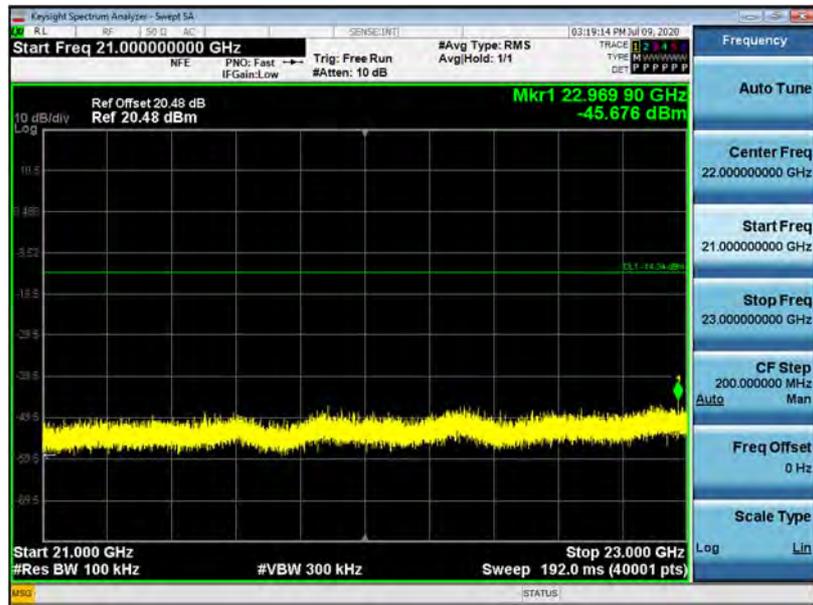

23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

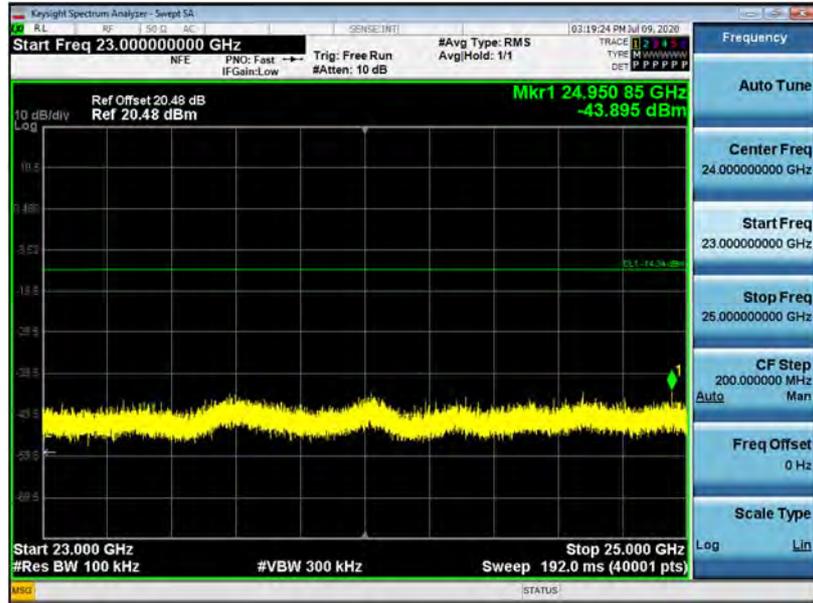


2M Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39

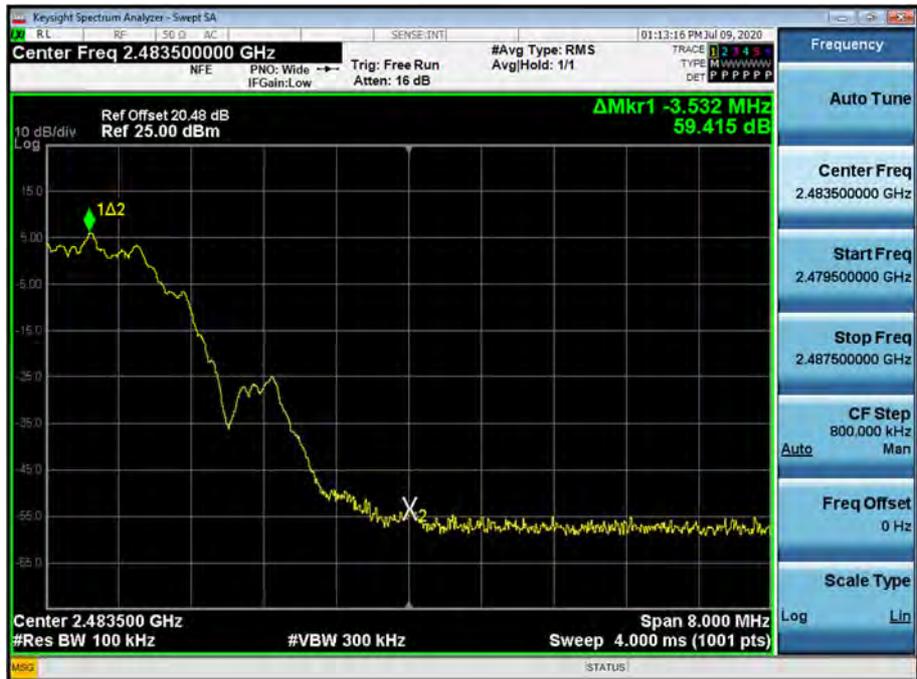

▣ 2M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 0)

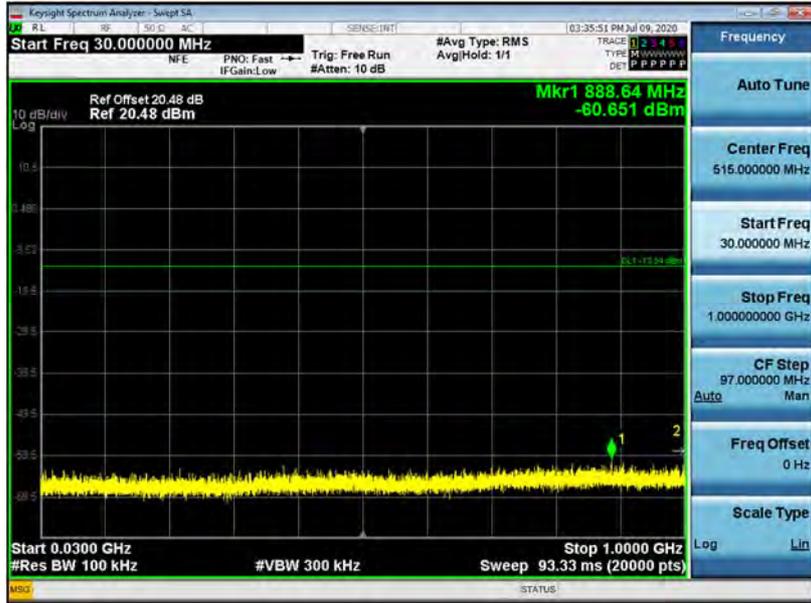


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 0)

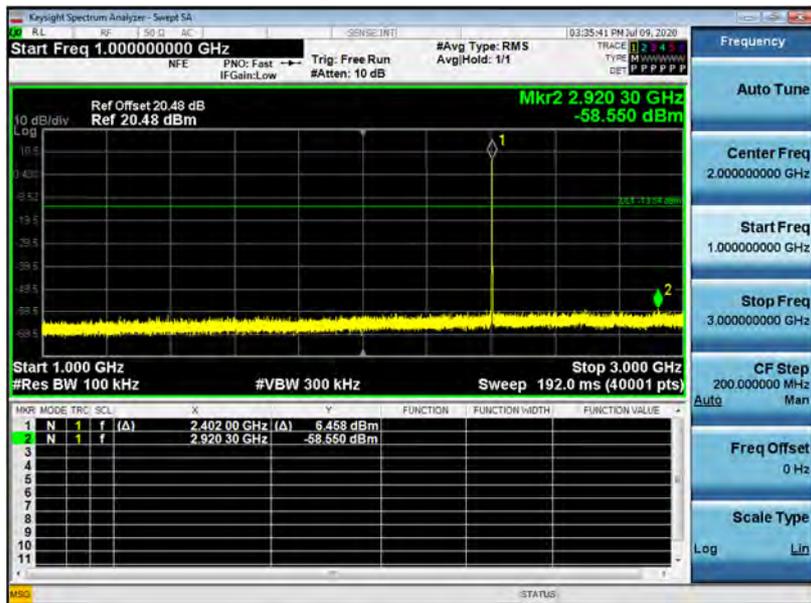

3 GHz ~ 5 GHz

Conducted Spurious Emission (Low-CH 0)

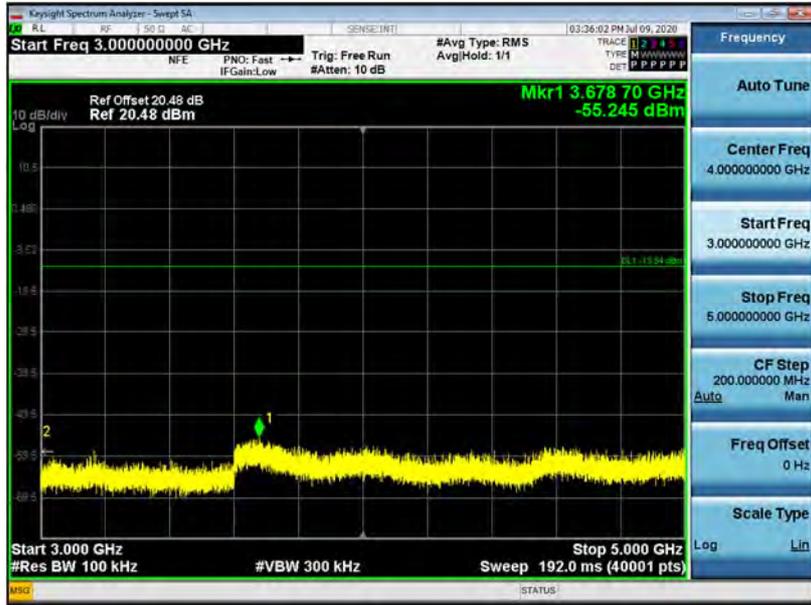


5 GHz ~ 7 GHz

Conducted Spurious Emission (Low-CH 0)




7 GHz ~ 9 GHz

Conducted Spurious Emission (Low-CH 0)

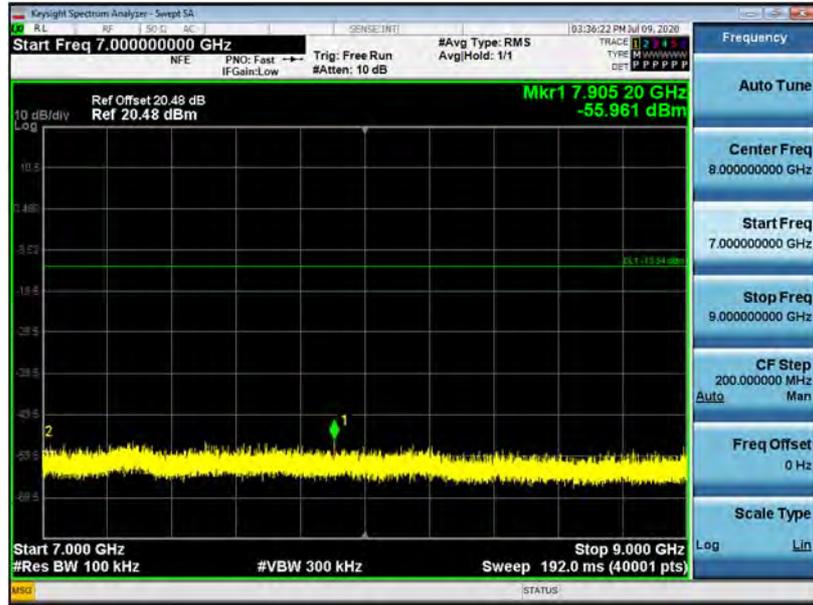


9 GHz ~ 11 GHz

Conducted Spurious Emission (Low-CH 0)

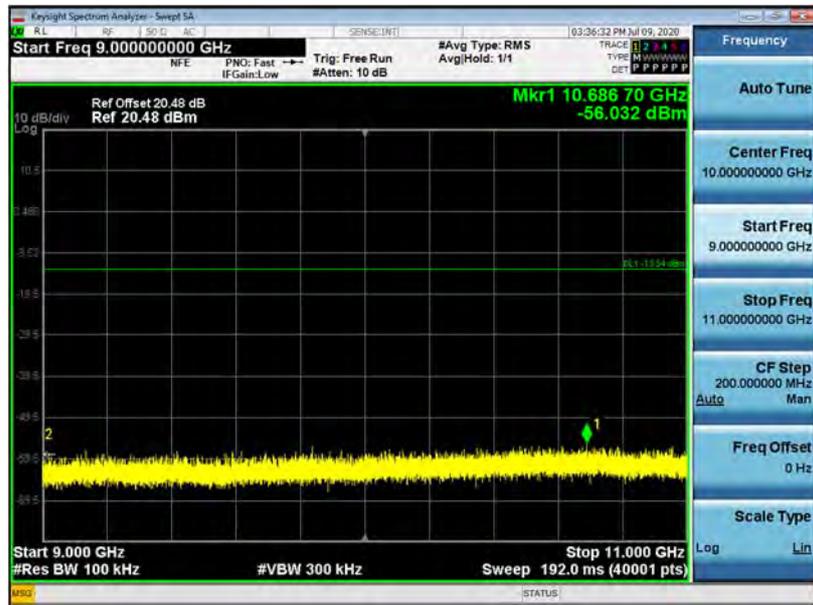


11 GHz ~ 13 GHz

Conducted Spurious Emission (Low-CH 0)

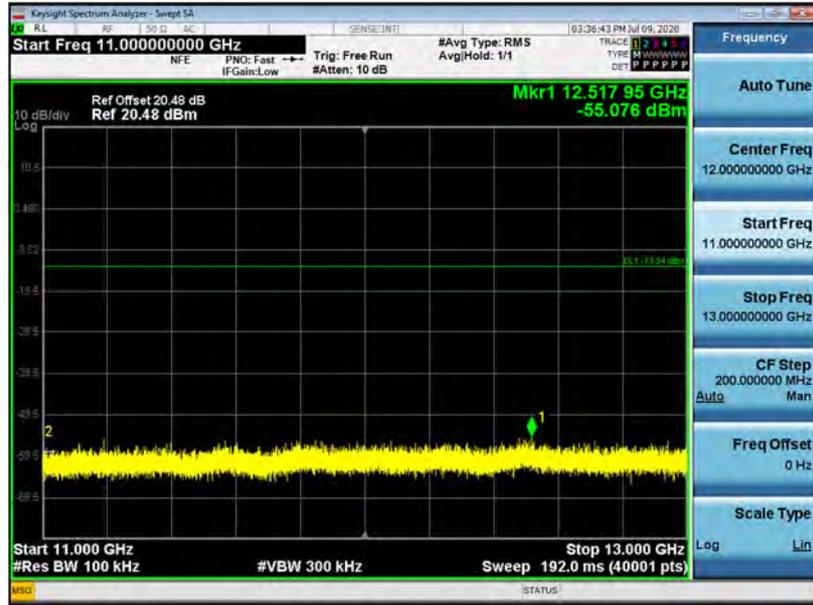


13 GHz ~ 15 GHz

Conducted Spurious Emission (Low-CH 0)

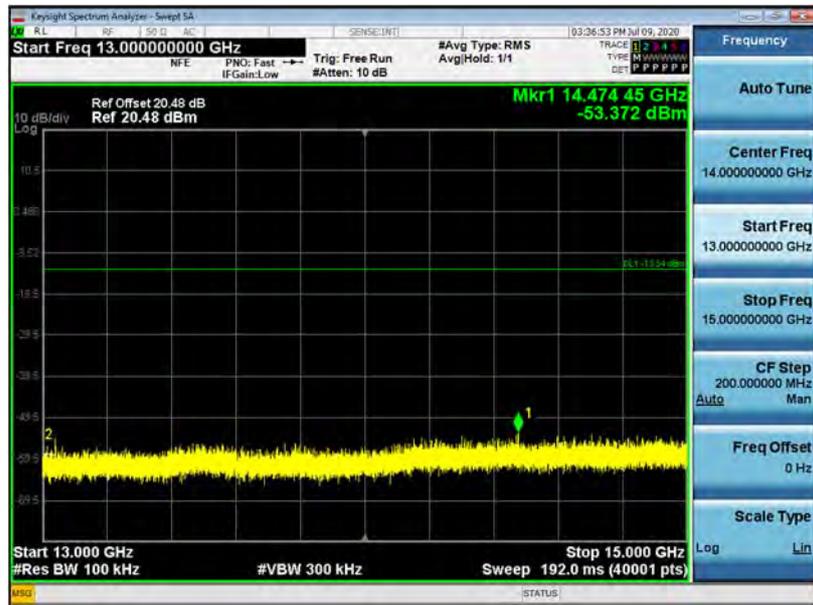


15 GHz ~ 17 GHz

Conducted Spurious Emission (Low-CH 0)

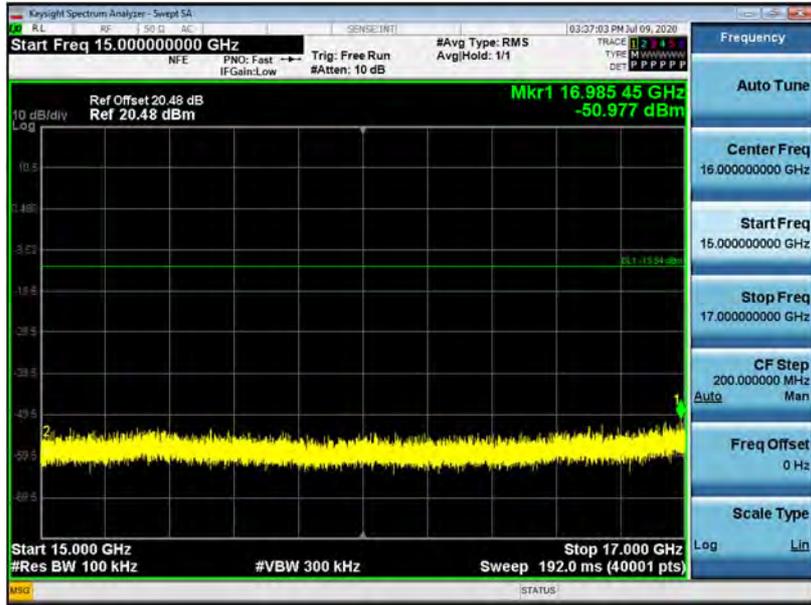


17 GHz ~ 19 GHz

Conducted Spurious Emission (Low-CH 0)

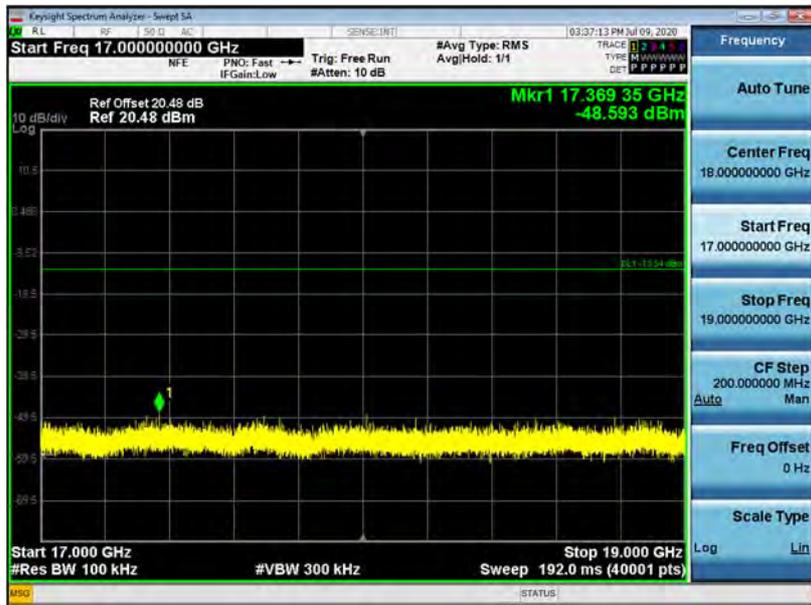


19 GHz ~ 21 GHz

Conducted Spurious Emission (Low-CH 0)

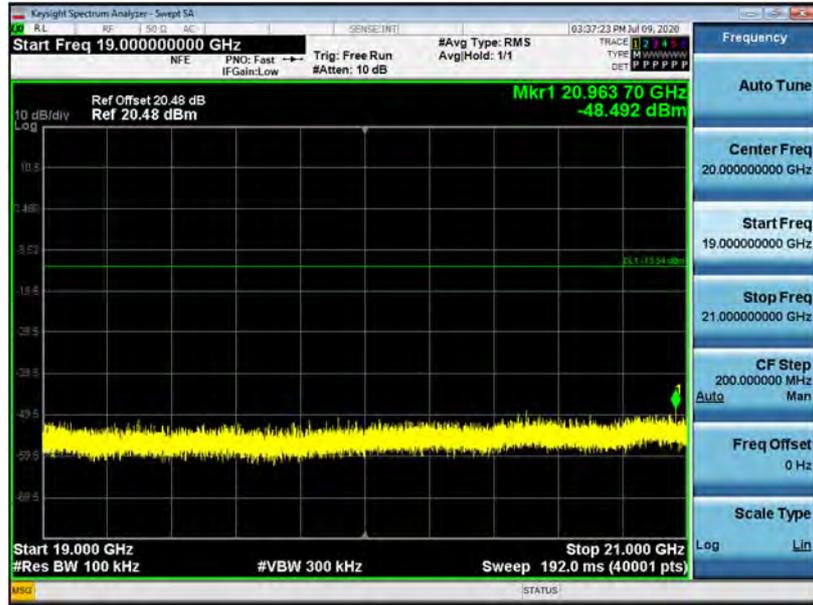


21 GHz ~ 23 GHz

Conducted Spurious Emission (Low-CH 0)

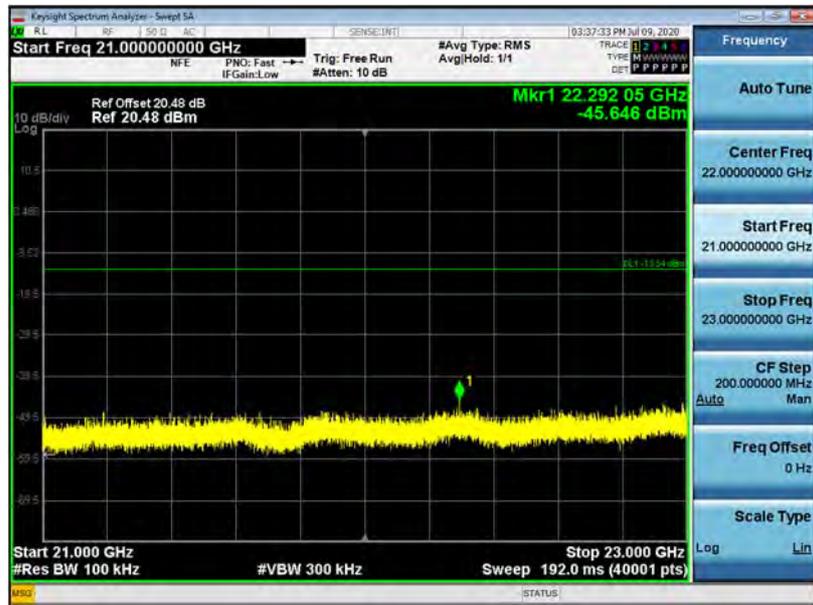

23 GHz ~ 25 GHz

Conducted Spurious Emission (Low-CH 0)

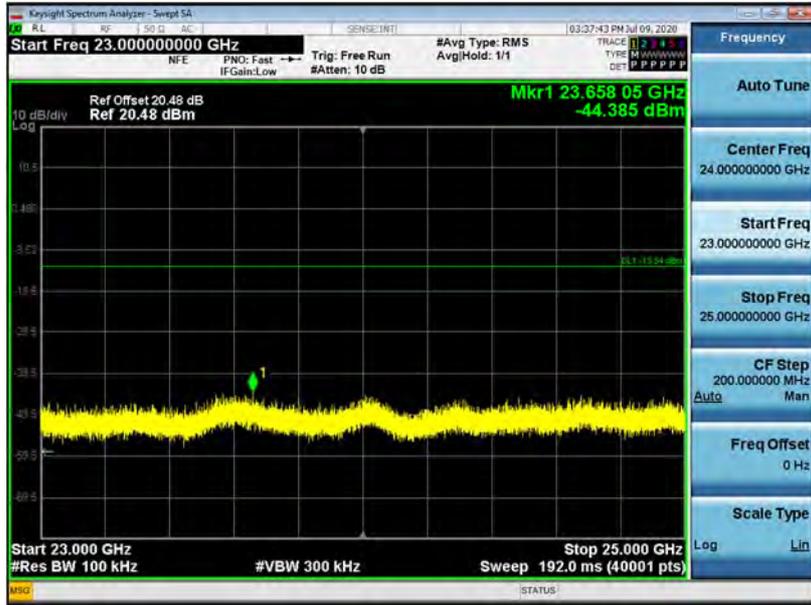

9.6 RADIATED SPURIOUS EMISSIONS

9.6.1 Basic Cable

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1M Bit/s (255 Byte)

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Correction [dB]	AN.+CL-AMP G [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	44.40	0.00	2.17	V	46.57	73.98	27.41	PK
4804	31.66	0.71	2.17	V	34.54	53.98	19.44	AV
7206	39.96	0.00	8.97	V	48.93	73.98	25.05	PK
7206	28.31	0.71	8.97	V	37.99	53.98	15.99	AV
4804	43.37	0.00	2.17	H	45.54	73.98	28.44	PK
4804	32.03	0.71	2.17	H	34.91	53.98	19.07	AV
7206	39.77	0.00	8.97	H	48.74	73.98	25.24	PK
7206	28.27	0.71	8.97	H	37.95	53.98	16.03	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Correction [dB]	AN.+CL-AMP G [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	41.65	0.00	2.66	V	44.31	73.98	29.67	PK
4880	30.14	0.71	2.66	V	33.51	53.98	20.47	AV
7320	40.67	0.00	9.04	V	49.71	73.98	24.27	PK
7320	28.42	0.71	9.04	V	38.17	53.98	15.81	AV
4880	42.21	0.00	2.66	H	44.87	73.98	29.11	PK
4880	30.49	0.71	2.66	H	33.86	53.98	20.12	AV
7320	40.34	0.00	9.04	H	49.38	73.98	24.60	PK
7320	28.11	0.71	9.04	H	37.86	53.98	16.12	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Correction [dB]	AN.+CL-AMP G [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	42.31	0.00	1.54	V	43.85	73.98	30.13	PK
4960	31.01	0.71	1.54	V	33.26	53.98	20.72	AV
7440	40.60	0.00	9.82	V	50.42	73.98	23.56	PK
7440	27.85	0.71	9.82	V	38.38	53.98	15.60	AV
4960	42.67	0.00	1.54	H	44.21	73.98	29.77	PK
4960	31.18	0.71	1.54	H	33.43	53.98	20.55	AV
7440	40.48	0.00	9.82	H	50.30	73.98	23.68	PK
7440	27.58	0.71	9.82	H	38.11	53.98	15.87	AV

Mode : 2M Bit/s (37 Byte)

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Correction [dB]	AN.+CL-AMP G [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	42.66	0.00	2.17	V	44.83	73.98	29.15	PK
4804	31.07	5.06	2.17	V	38.30	53.98	15.68	AV
7206	40.73	0.00	8.97	V	49.70	73.98	24.28	PK
7206	28.20	5.06	8.97	V	42.23	53.98	11.75	AV
4804	43.24	0.00	2.17	H	45.41	73.98	28.57	PK
4804	31.42	5.06	2.17	H	38.65	53.98	15.33	AV
7206	40.58	0.00	8.97	H	49.55	73.98	24.43	PK
7206	28.11	5.06	8.97	H	42.14	53.98	11.84	AV

Operation Mode: CH Mid


Frequency [MHz]	Reading [dBuV]	Duty Cycle Correction [dB]	AN.+CL-AMP G [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	40.98	0.00	2.66	V	43.64	73.98	30.34	PK
4880	29.47	5.06	2.66	V	37.19	53.98	16.79	AV
7320	40.33	0.00	9.04	V	49.37	73.98	24.61	PK
7320	28.31	5.06	9.04	V	42.41	53.98	11.57	AV
4880	41.73	0.00	2.66	H	44.39	73.98	29.59	PK
4880	29.75	5.06	2.66	H	37.47	53.98	16.51	AV
7320	40.01	0.00	9.04	H	49.05	73.98	24.93	PK
7320	28.05	5.06	9.04	H	42.15	53.98	11.83	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Correction [dB]	AN.+CL-AMP G [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.03	0.00	1.54	V	42.57	73.98	31.41	PK
4960	29.47	5.06	1.54	V	36.07	53.98	17.91	AV
7440	40.25	0.00	9.82	V	50.07	73.98	23.91	PK
7440	27.78	5.06	9.82	V	42.66	53.98	11.32	AV
4960	41.64	0.00	1.54	H	43.18	73.98	30.80	PK
4960	29.84	5.06	1.54	H	36.44	53.98	17.54	AV
7440	39.89	0.00	9.82	H	49.71	73.98	24.27	PK
7440	27.64	5.06	9.82	H	42.52	53.98	11.46	AV


▣ 1M Bit/s (255 Byte) Test Plots (Worst case : X-V)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

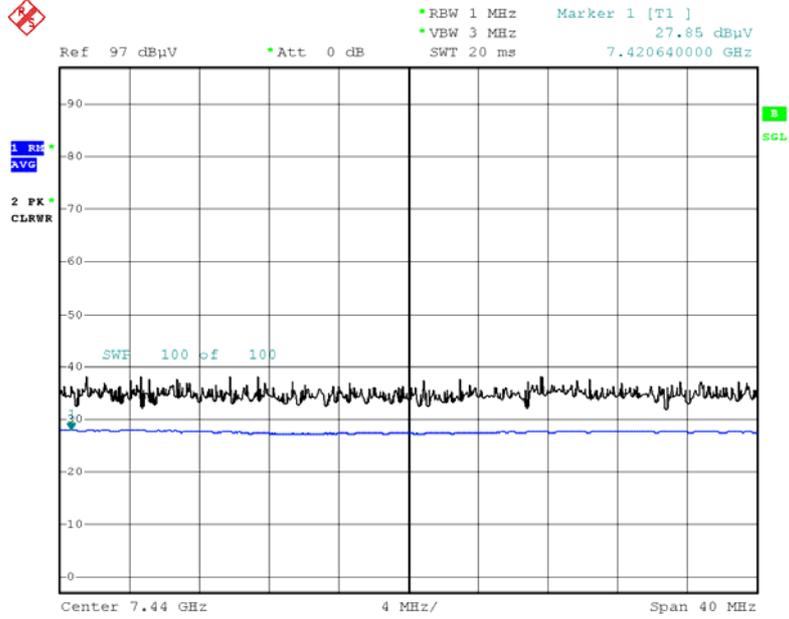

Date: 15.JUL.2020 05:21:40


Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

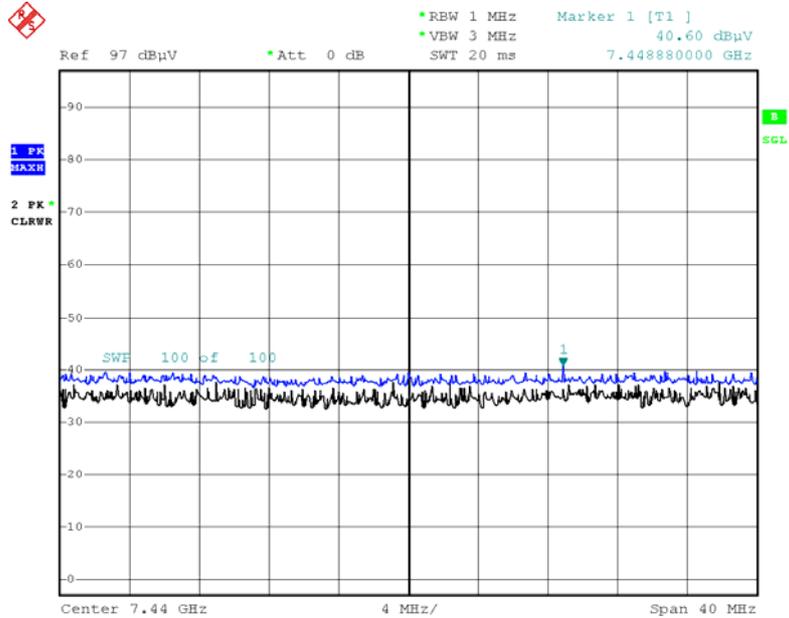

Date: 15.JUL.2020 05:21:50


▣ 2M Bit/s 37 Byte Test Plots (Worst case : X-V)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

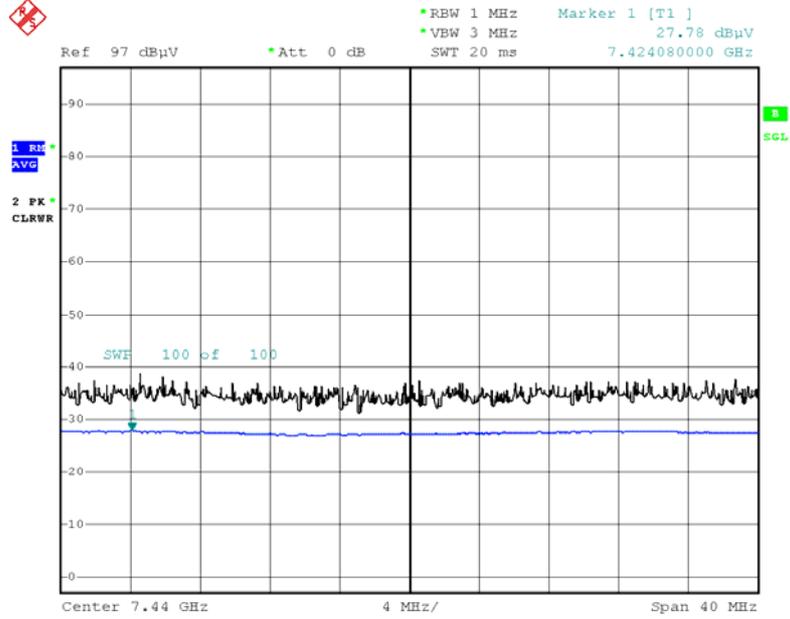

Date: 15.JUL.2020 08:59:07

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

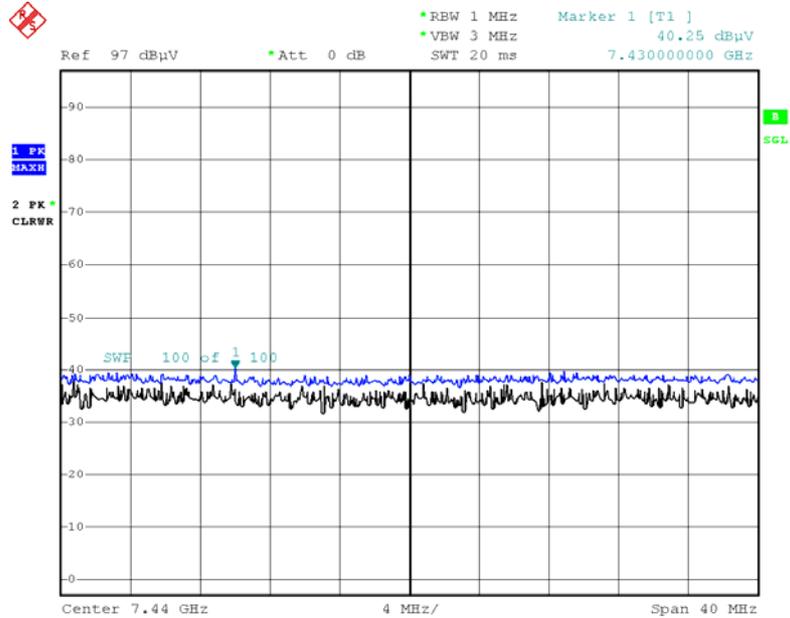

Date: 15.JUL.2020 08:59:21

Note:

Plot of worst case are only reported.

9.6.2 FFC Cable

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1M Bit/s (37 Byte)

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Correction [dB]	AN.+CL-AMP G [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	43.16	0.00	1.54	V	44.70	73.98	29.28	PK
4960	31.08	0.71	1.54	V	33.33	53.98	20.65	AV
7440	41.72	0.00	9.82	V	51.54	73.98	22.44	PK
7440	30.11	0.71	9.82	V	40.64	53.98	13.34	AV
4960	42.76	0.00	1.54	H	44.30	73.98	29.68	PK
4960	31.05	0.71	1.54	H	33.30	53.98	20.68	AV
7440	42.46	0.00	9.82	H	52.28	73.98	21.70	PK
7440	30.67	0.71	9.82	H	41.20	53.98	12.78	AV

Mode : 2M Bit/s (37 Byte)

Operation Mode: CH High


Frequency [MHz]	Reading [dBuV]	Duty Cycle Correction [dB]	AN.+CL-AMP G [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	43.16	0.00	1.54	V	44.70	73.98	29.28	PK
4960	30.70	5.06	1.54	V	37.30	53.98	16.68	AV
7440	40.14	0.00	9.82	V	49.96	73.98	24.02	PK
7440	28.14	5.06	9.82	V	43.02	53.98	10.96	AV
4960	42.93	0.00	1.54	H	44.47	73.98	29.51	PK
4960	30.74	5.06	1.54	H	37.34	53.98	16.64	AV
7440	39.98	0.00	9.82	H	49.80	73.98	24.18	PK
7440	28.22	5.06	9.82	H	43.10	53.98	10.88	AV

Note:

1. The worst case of the basic cable only was tested.


▣ 1M Bit/s (37 Byte) Test Plots (Worst case : X-H)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

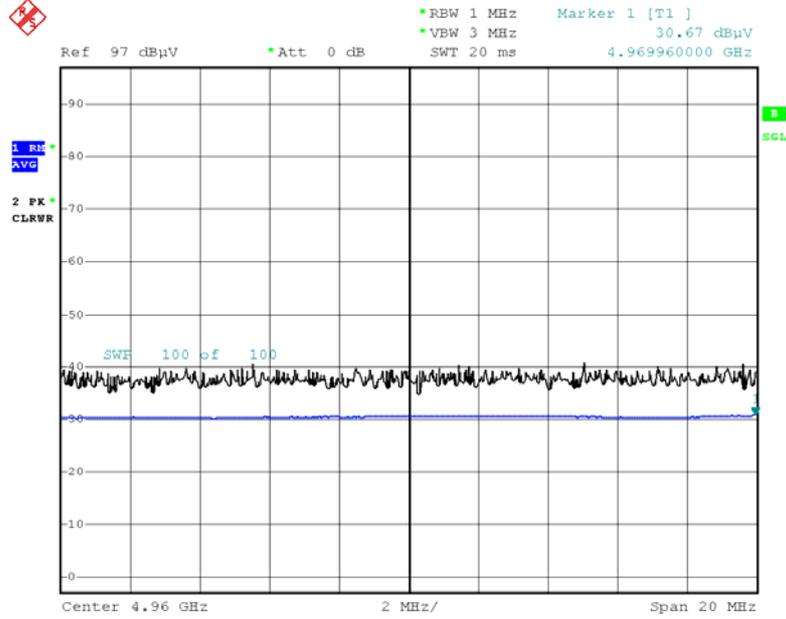

Date: 31.AUG.2020 10:24:03


Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

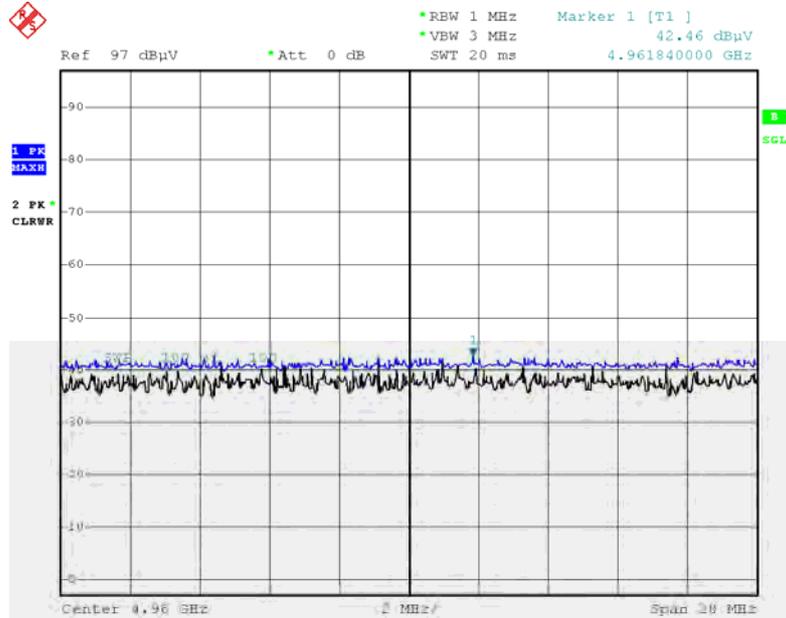

Date: 31.AUG.2020 10:24:14


▣ 2M Bit/s 37 Byte Test Plots (Worst case : X-H)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

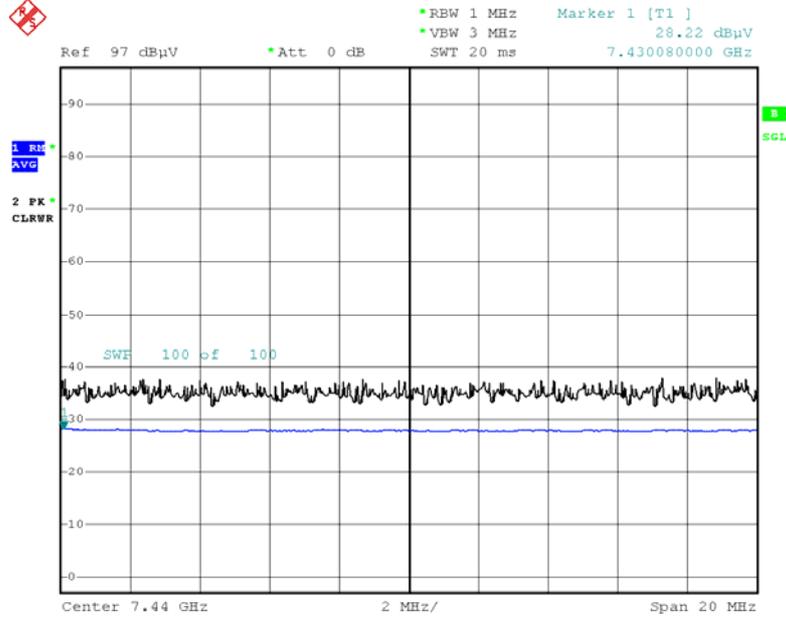

Date: 31.AUG.2020 10:28:26

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

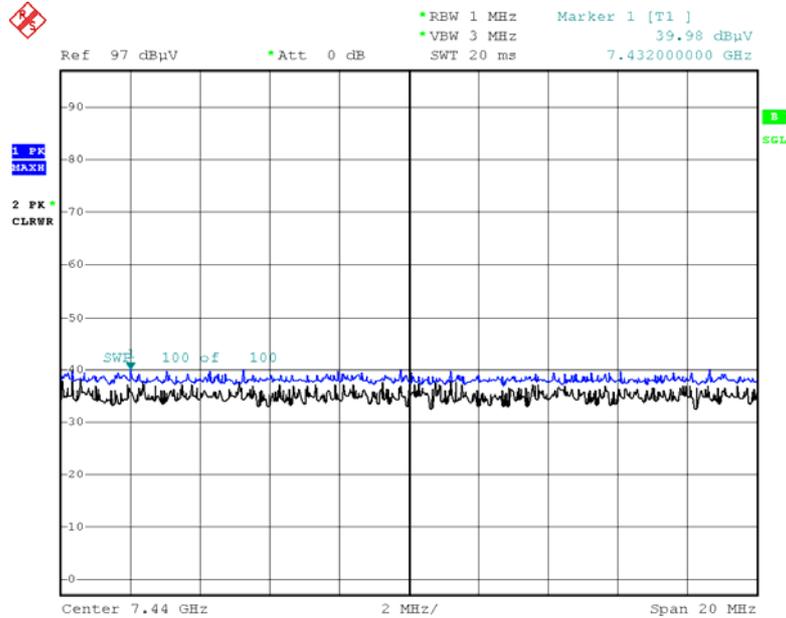

Date: 31.AUG.2020 10:28:35

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

9.7.1 Basic Cable

Mode : 1M Bit/s (255 Byte)

Operating Frequency 2402 MHz & 2480 MHz

Channel No. 0 & 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	※ A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.87	0.00	35.60	H	54.47	73.98	19.51	PK
2390.0	2.19	0.71	35.60	H	38.49	53.98	15.49	AV
2390.0	18.97	0.00	35.60	V	54.57	73.98	19.41	PK
2390.0	2.52	0.71	35.60	V	38.82	53.98	15.16	AV
2483.5	19.29	0.00	35.96	H	55.26	73.98	18.72	PK
2483.5	3.21	0.71	35.96	H	39.88	53.98	14.10	AV
2483.5	19.91	0.00	35.96	V	55.87	73.98	18.11	PK
2483.5	3.52	0.71	35.96	V	40.19	53.98	13.79	AV

Mode : 2M Bit/s (37 Byte)

Operating Frequency 2402 MHz & 2480 MHz


Channel No. 0 & 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	※ A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	19.51	0.00	35.60	H	55.11	73.98	18.87	PK
2390.0	2.31	5.06	35.60	H	42.97	53.98	11.01	AV
2390.0	18.52	0.00	35.60	V	54.12	73.98	19.86	PK
2390.0	2.09	5.06	35.60	V	42.75	53.98	11.23	AV
2483.5	21.23	0.00	35.96	H	57.19	73.98	16.79	PK
2483.5	4.91	5.06	35.96	H	45.94	53.98	8.04	AV
2483.5	20.30	0.00	35.96	V	56.27	73.98	17.71	PK
2483.5	7.23	5.06	35.96	V	48.26	53.98	5.72	AV


Note: All data Worst case Duty Cycle Correction Factor applied.

Mode : 1M Bit/s (255 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Reading (Ch.39, Y-V)

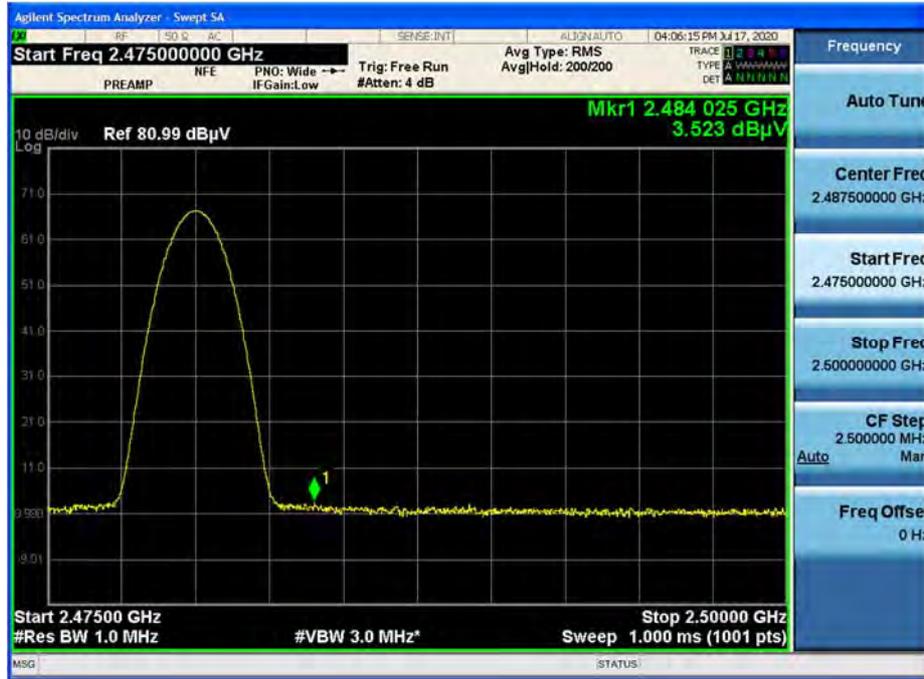


Radiated Restricted Band Edges plot – Peak Reading (Ch.39, Y-V)

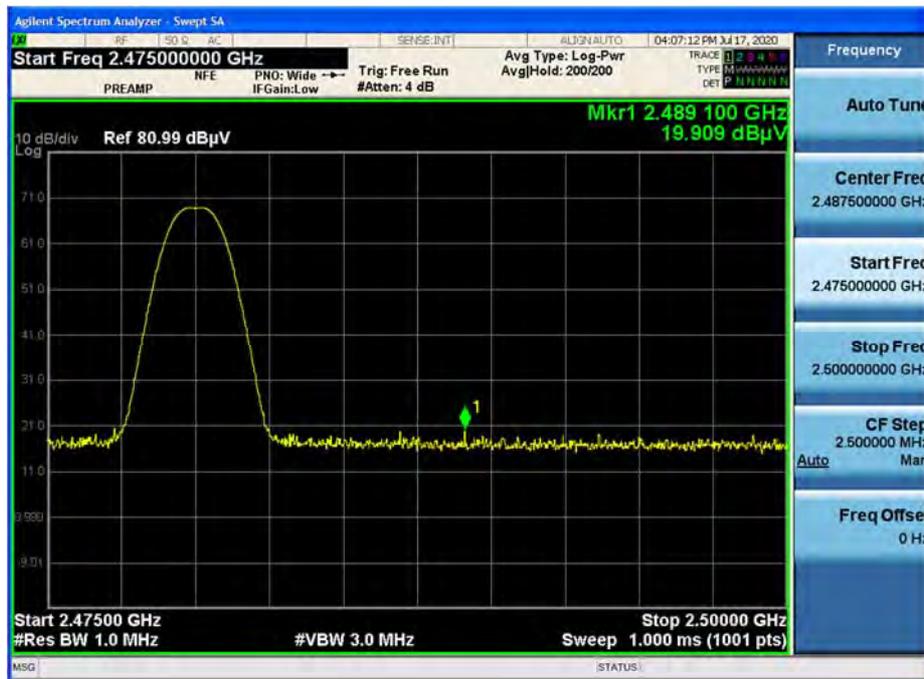


Mode : 2M Bit/s (37 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Reading (Ch.39, Y-V)

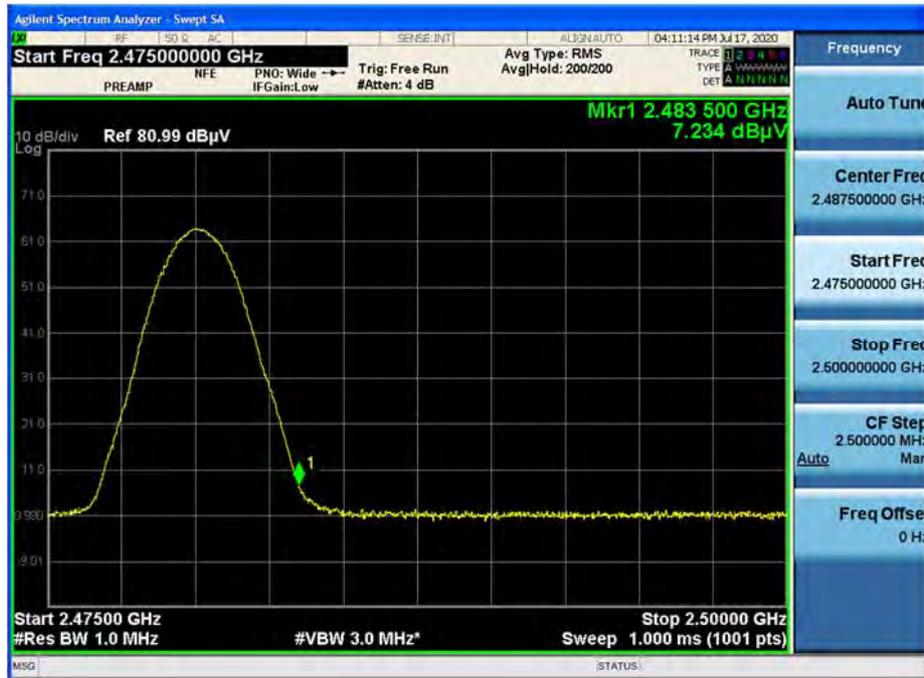

Radiated Restricted Band Edges plot – Peak Reading (Ch.39, Y-V)

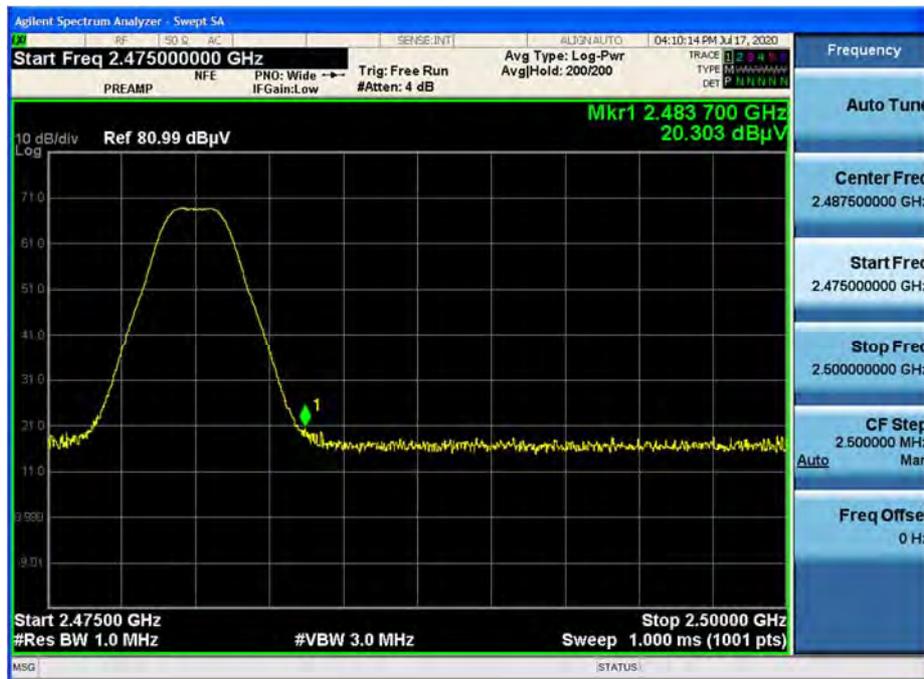

Note:

Plot of worst case are only reported.

9.7.2 FFC Cable

Mode : 1M Bit/s (255 Byte)

Operating Frequency 2480 MHz
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	※ A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	19.60	0.00	35.96	H	55.57	73.98	18.41	PK
2483.5	3.28	0.71	35.96	H	39.94	53.98	14.04	AV
2483.5	19.42	0.00	35.96	V	55.38	73.98	18.60	PK
2483.5	3.23	0.71	35.96	V	39.90	53.98	14.08	AV

Mode : 2M Bit/s (37 Byte)

Operating Frequency 2480 MHz
 Channel No. 39


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	※ A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	20.98	0.00	35.96	H	56.94	73.98	17.04	PK
2483.5	5.75	5.06	35.96	H	46.78	53.98	7.20	AV
2483.5	20.29	0.00	35.96	V	56.25	73.98	17.73	PK
2483.5	5.42	5.06	35.96	V	46.44	53.98	7.54	AV

Note:


1. All data Worst case Duty Cycle Correction Factor applied.
2. The worst case of the basic cable only was tested.

Mode : 1M Bit/s (255 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Reading (Ch.39, X-H)

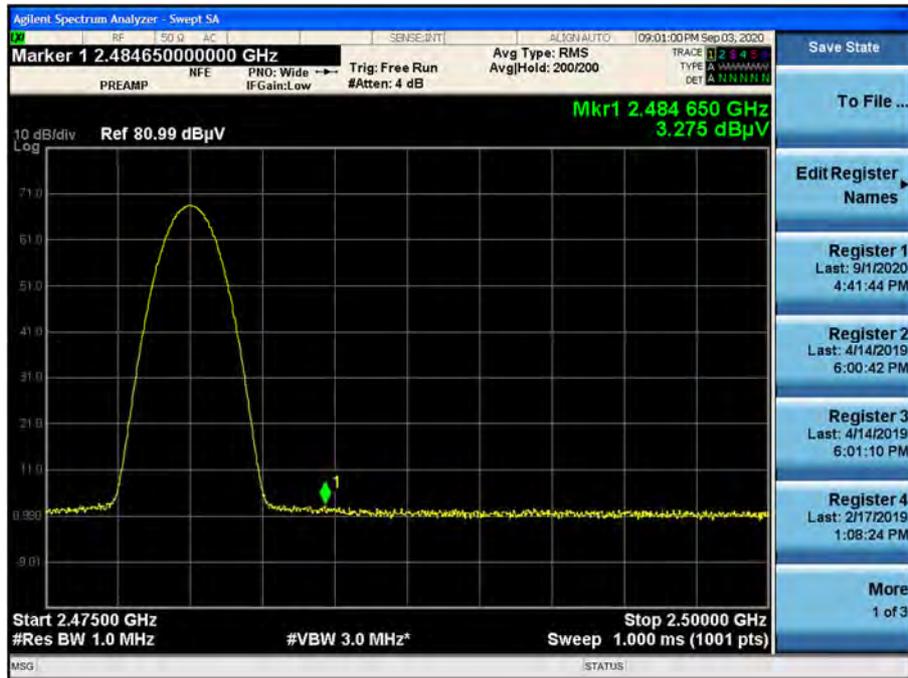


Radiated Restricted Band Edges plot – Peak Reading (Ch.39, X-H)

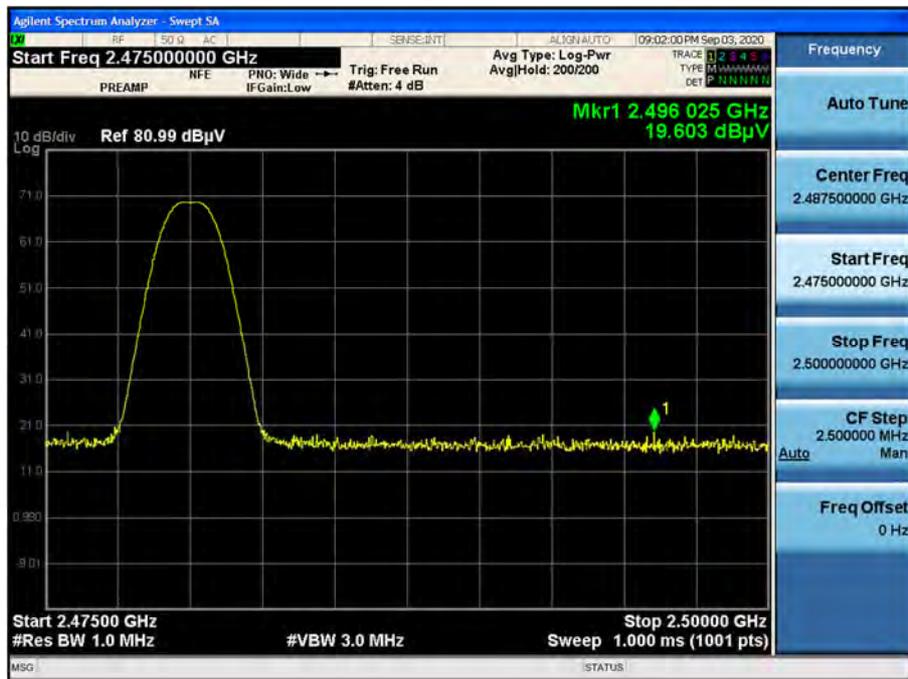


Mode : 2M Bit/s (37 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Reading (Ch.39, X-H)

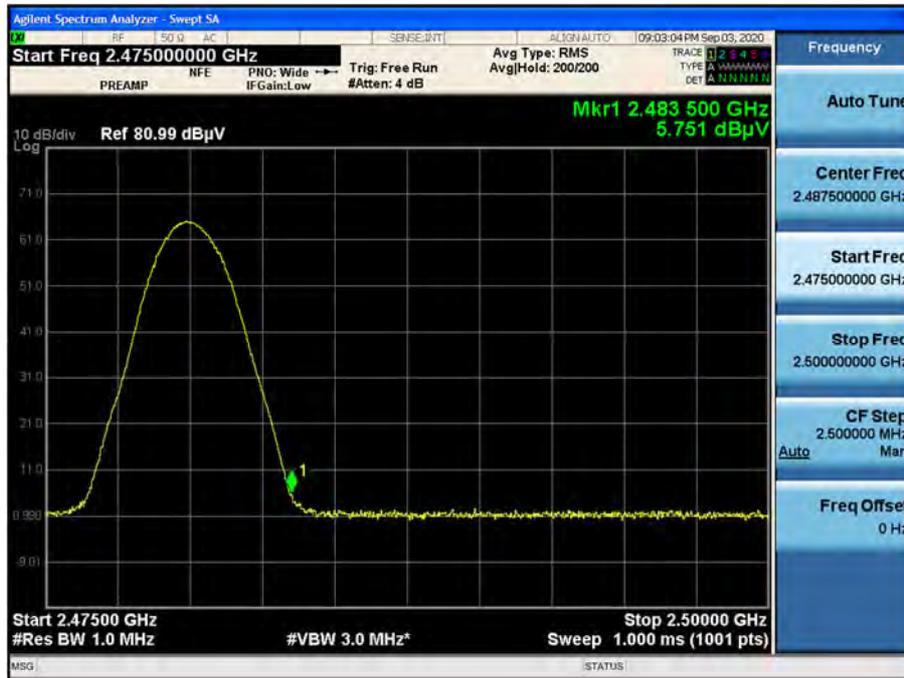

Radiated Restricted Band Edges plot – Peak Reading (Ch.39, X-H)

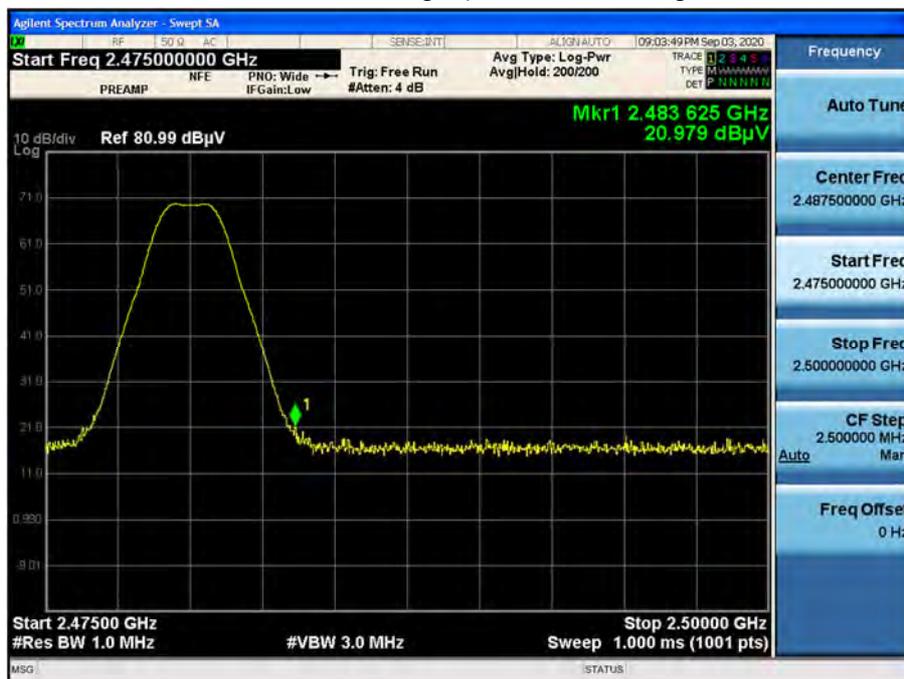

Note:

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

9.8.1 Basic Cable

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

9.8.2 FFC Cable

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The worst case of the basic cable only was tested.

9.9 POWERLINE CONDUCTED EMISSIONS

9.9.1 Basic Cable

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAX12
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BTLE_N

FCC CLASS B

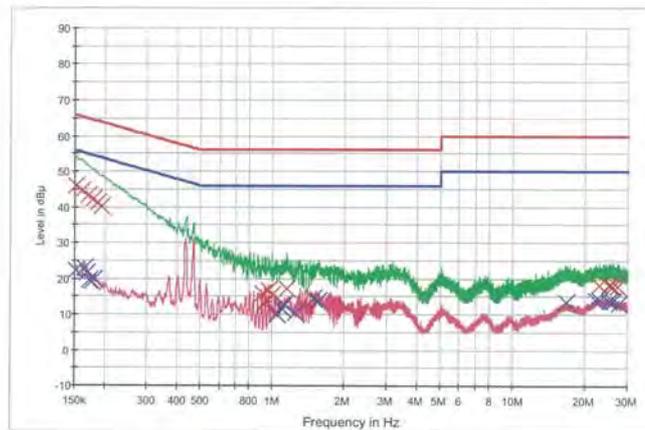

— FCC CLASS B_QP —×— FCC CLASS B_AV —×— Preview Result 1-PK+
 —×— Preview Result 2-AVG —×— Final Result 1-QPK —×— Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	45.9	9.000	On	N	9.7	20.0	65.9
0.160000	44.7	9.000	On	N	9.7	20.8	65.5
0.170000	43.3	9.000	On	N	9.7	21.7	65.0
0.178000	42.1	9.000	On	N	9.7	22.5	64.6
0.188000	41.0	9.000	On	N	9.7	23.1	64.1
0.194000	40.3	9.000	On	N	9.7	23.5	63.9
0.906000	15.8	9.000	On	N	9.7	40.2	56.0
0.934000	13.1	9.000	On	N	9.7	42.9	56.0
0.938000	13.8	9.000	On	N	9.7	42.2	56.0
0.966000	16.9	9.000	On	N	9.7	39.1	56.0
1.000000	15.6	9.000	On	N	9.7	40.4	56.0
1.154000	17.3	9.000	On	N	9.7	38.7	56.0
22.946000	18.0	9.000	On	N	10.0	42.0	60.0
25.122000	18.2	9.000	On	N	10.0	41.8	60.0
25.608000	18.1	9.000	On	N	10.0	41.9	60.0
26.016000	17.9	9.000	On	N	10.0	42.1	60.0
26.202000	17.8	9.000	On	N	10.0	42.2	60.0
27.316000	17.9	9.000	On	N	10.0	42.1	60.0

2020-08-25

오후 8:35:01

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	22.3	9.000	On	N	9.7	33.6	55.9
0.164000	22.9	9.000	On	N	9.7	32.4	55.3
0.168000	21.7	9.000	On	N	9.7	33.4	55.1
0.172000	19.6	9.000	On	N	9.7	35.3	54.9
0.176000	19.1	9.000	On	N	9.7	35.5	54.7
0.180000	19.8	9.000	On	N	9.7	34.7	54.5
1.046000	10.1	9.000	On	N	9.7	35.9	46.0
1.100000	11.5	9.000	On	N	9.7	34.5	46.0
1.124000	12.0	9.000	On	N	9.7	33.1	46.0
1.244000	10.2	9.000	On	N	9.7	35.8	46.0
1.490000	14.3	9.000	On	N	9.7	31.7	46.0
1.552000	13.8	9.000	On	N	9.8	32.2	46.0
16.712000	13.3	9.000	On	N	10.0	36.7	50.0
22.048000	14.0	9.000	On	N	10.0	36.0	50.0
22.946000	14.0	9.000	On	N	10.0	36.0	50.0
25.122000	13.8	9.000	On	N	10.0	36.2	50.0
26.016000	13.7	9.000	On	N	10.0	36.3	50.0
27.616000	13.2	9.000	On	N	10.0	36.8	50.0

2020-08-25

오후 8:35:01

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAX12
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BTLE_L1

FCC CLASS B

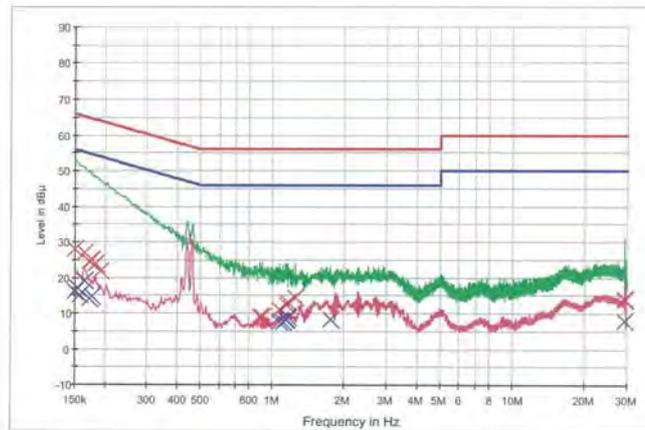

— FCC CLASS B_CP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	28.1	9.000	On	L1	9.7	37.9	66.0
0.164000	26.9	9.000	On	L1	9.7	38.3	65.3
0.172000	24.6	9.000	On	L1	9.7	40.2	64.9
0.176000	24.8	9.000	On	L1	9.7	39.9	64.7
0.184000	23.8	9.000	On	L1	9.7	40.5	64.3
0.192000	22.0	9.000	On	L1	9.7	42.0	63.9
0.892000	9.1	9.000	On	L1	9.7	46.9	56.0
0.906000	8.8	9.000	On	L1	9.7	47.2	56.0
1.068000	11.2	9.000	On	L1	9.7	44.8	56.0
1.144000	12.5	9.000	On	L1	9.7	43.6	56.0
1.156000	13.2	9.000	On	L1	9.7	42.8	56.0
1.250000	14.3	9.000	On	L1	9.8	41.7	56.0
29.434000	13.7	9.000	On	L1	10.0	46.3	60.0
29.444000	13.9	9.000	On	L1	10.0	46.1	60.0
29.448000	13.9	9.000	On	L1	10.0	46.1	60.0
29.452000	14.0	9.000	On	L1	10.0	46.0	60.0
29.462000	13.9	9.000	On	L1	10.0	46.1	60.0
29.466000	14.0	9.000	On	L1	10.0	46.0	60.0

2020-08-25

오후 8:44:50

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr (dB)	Margin (dB)	Limit (dBuV)
0.150000	16.1	9.000	On	L1	9.7	39.9	56.0
0.154000	17.0	9.000	On	L1	9.7	38.8	55.8
0.158000	15.0	9.000	On	L1	9.7	40.5	55.6
0.164000	19.1	9.000	On	L1	9.7	36.1	55.3
0.172000	14.2	9.000	On	L1	9.7	40.7	54.9
0.176000	14.6	9.000	On	L1	9.7	40.1	54.7
1.069000	7.5	9.000	On	L1	9.7	38.5	46.0
1.112000	7.6	9.000	On	L1	9.7	38.4	46.0
1.139000	8.3	9.000	On	L1	9.7	37.7	46.0
1.144000	8.4	9.000	On	L1	9.7	37.6	46.0
1.159000	9.0	9.000	On	L1	9.7	37.0	46.0
1.742000	8.4	9.000	On	L1	9.8	37.6	46.0
29.312000	7.9	9.000	On	L1	10.0	42.1	50.0
29.360000	7.8	9.000	On	L1	10.0	42.2	50.0
29.440000	7.9	9.000	On	L1	10.0	42.2	50.0
29.446000	7.9	9.000	On	L1	10.0	42.1	50.0
29.450000	7.9	9.000	On	L1	10.0	42.1	50.0
29.454000	8.0	9.000	On	L1	10.0	42.0	50.0

2020-08-25

오후 8:44:50

9.9.2 FFC Cable

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT:	LGSBWAX12
Manufacturer:	LG
Test Site:	SHIELD ROOM
Operating Conditions:	BTLE_L1

FCC CLASS B

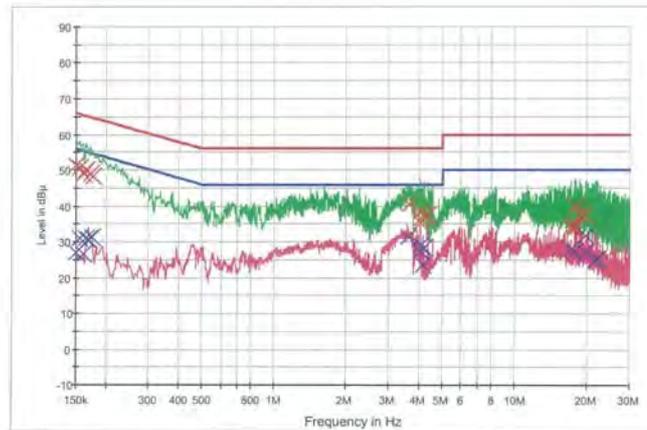

— FCC CLASS B_OP
 — FCC CLASS B_AV
 — Preview Result 1-PK+
— Preview Result 2-AVG
 X Final Result 1-QPK
 X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	51.2	9.000	On	L1	9.8	14.8	66.0
0.156000	50.6	9.000	On	L1	9.8	15.0	65.7
0.160000	49.0	9.000	On	L1	9.8	16.5	65.5
0.164000	50.1	9.000	On	L1	9.8	15.2	65.3
0.172000	48.9	9.000	On	L1	9.8	16.0	64.9
0.176000	48.2	9.000	On	L1	9.8	16.5	64.7
3.674000	40.5	9.000	On	L1	9.8	15.5	56.0
4.046000	38.5	9.000	On	L1	9.8	17.5	56.0
4.052000	36.6	9.000	On	L1	9.8	19.4	56.0
4.056000	35.6	9.000	On	L1	9.8	20.4	56.0
4.220000	37.5	9.000	On	L1	9.8	18.5	56.0
4.372000	37.4	9.000	On	L1	9.9	18.6	56.0
17.040000	34.0	9.000	On	L1	10.0	26.0	60.0
17.706000	34.4	9.000	On	L1	10.0	25.6	60.0
17.788000	33.8	9.000	On	L1	10.0	26.2	60.0
17.916000	39.9	9.000	On	L1	10.0	20.1	60.0
18.496000	37.5	9.000	On	L1	10.1	22.5	60.0
19.646000	37.8	9.000	On	L1	10.1	22.2	60.0

2020-09-07

오후 9:19:57

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	28.9	9.000	On	L1	9.8	29.1	56.0
0.156000	30.9	9.000	On	L1	9.8	24.7	55.7
0.160000	26.4	9.000	On	L1	9.8	29.0	55.5
0.164000	31.0	9.000	On	L1	9.8	24.2	55.3
0.168000	30.6	9.000	On	L1	9.8	24.5	55.1
0.174000	31.3	9.000	On	L1	9.8	23.4	54.8
3.612000	31.4	9.000	On	L1	9.8	14.6	48.0
4.048000	29.1	9.000	On	L1	9.8	16.9	48.0
4.050000	27.4	9.000	On	L1	9.8	18.6	48.0
4.056000	27.1	9.000	On	L1	9.8	18.9	48.0
4.172000	23.6	9.000	On	L1	9.8	22.4	48.0
4.220000	28.2	9.000	On	L1	9.8	17.8	48.0
17.040000	28.0	9.000	On	L1	10.0	22.0	50.0
17.788000	27.2	9.000	On	L1	10.0	22.8	50.0
19.646000	31.7	9.000	On	L1	10.1	18.3	50.0
19.762000	26.8	9.000	On	L1	10.1	23.2	50.0
21.578000	25.1	9.000	On	L1	10.1	24.9	50.0
22.048000	25.2	9.000	On	L1	10.1	24.8	50.0

2020-09-07

모두 9:19:57

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAX12
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BTLE_N

FCC CLASS B

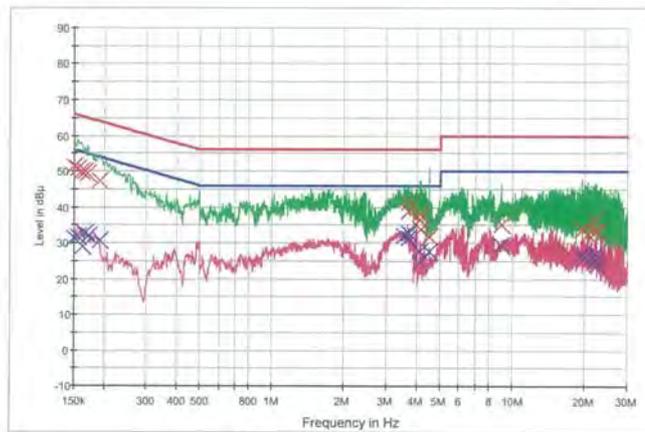

— FCC CLASS B_OP
 — FCC CLASS B_AV
 — Preview Result 1-PK+
— Preview Result 2-AVG
 X Final Result 1-QPK
 X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	51.4	9.000	On	N	9.7	14.6	66.0
0.156000	50.6	9.000	On	N	9.7	15.1	65.7
0.160000	50.1	9.000	On	N	9.7	15.3	65.5
0.166000	50.0	9.000	On	N	9.7	15.2	65.2
0.170000	49.3	9.000	On	N	9.7	15.7	65.0
0.192000	47.2	9.000	On	N	9.7	16.7	63.9
3.680000	38.7	9.000	On	N	9.8	17.3	56.0
3.684000	41.1	9.000	On	N	9.8	14.9	56.0
4.116000	36.5	9.000	On	N	9.8	19.5	56.0
4.122000	38.3	9.000	On	N	9.8	17.7	56.0
4.174000	33.8	9.000	On	N	9.8	22.2	56.0
4.524000	31.6	9.000	On	N	9.8	24.4	56.0
9.006000	35.2	9.000	On	N	9.9	24.8	60.0
19.572000	33.6	9.000	On	N	10.0	26.4	60.0
20.538000	32.5	9.000	On	N	10.0	27.5	60.0
22.124000	36.4	9.000	On	N	10.1	23.6	60.0
22.148000	33.1	9.000	On	N	10.1	26.9	60.0
22.482000	33.2	9.000	On	N	10.1	26.8	60.0

2020-09-07

오후 9:07:06

Test

2/2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	31.2	9.000	On	N	9.7	24.8	56.0
0.156000	31.8	9.000	On	N	9.7	23.9	55.7
0.162000	28.9	9.000	On	N	9.7	26.4	55.4
0.166000	32.7	9.000	On	N	9.7	22.4	55.2
0.172000	32.1	9.000	On	N	9.7	22.8	54.9
0.192000	30.6	9.000	On	N	9.7	23.3	53.9
3.510000	32.1	9.000	On	N	9.8	13.9	46.0
3.676000	31.4	9.000	On	N	9.8	14.6	46.0
3.686000	32.8	9.000	On	N	9.8	13.2	46.0
4.116000	27.7	9.000	On	N	9.8	18.3	46.0
4.122000	24.6	9.000	On	N	9.8	21.4	46.0
4.524000	27.6	9.000	On	N	9.8	18.4	46.0
9.006000	29.4	9.000	On	N	9.9	20.6	50.0
19.572000	27.0	9.000	On	N	10.0	23.0	50.0
19.846000	26.1	9.000	On	N	10.0	23.9	50.0
22.104000	25.7	9.000	On	N	10.1	24.3	50.0
22.124000	26.6	9.000	On	N	10.1	23.2	50.0
22.462000	24.0	9.000	On	N	10.1	26.0	50.0

2020-09-07

오후 9:07:06

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/05/2020	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/18/2020	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	05/06/2020	Annual	MY53310623
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45101406
Agilent	N1921A / Power Sensor	03/23/2020	Annual	MY55220026
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/25/2020	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
Weinschel	2-20 / Attenuator(20 dB)	10/08/2019	Annual	BR0592
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/12/2020	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/19/2020	Biennial	3368
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/31/2018	Biennial	00895
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/11/2019	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/26/2019	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX	CBLU1183540B-01/Broadband Bench Top LNA	12/24/2019	Annual	N/A
WEINSCHTEL	56-10 / Attenuator(10 dB)			
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	12/24/2019	Annual	N/A
Api tech.	18B-03 / Attenuator (3 dB)			
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/24/2019	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/24/2019	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/24/2019	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017)..

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2009-FI006-P