

# FCC LTE REPORT

## FCC Class II Permissive Change

**Applicant Name:**  
 LG Electronics Inc.

**Date of Issue:**  
 June 11, 2015

**Address:**  
 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si,  
 Gyeonggi-do 451-713, Korea

**Test Site/Location:**  
 HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,  
 Majang-myeon, Icheon-si, Gyeonggi-do, Korea

**Report No.:** HCT-R-1506-F022

**HCT FRN:** 0005866421

**FCC ID:** BEJLTTC10

**APPLICANT:** LG Electronics Inc.

**FCC Model(s):** GEN10NADNA  
**EUT Type:** GSM/WCDMA/LTE Telematics NAD module  
**FCC Classification:** PCS Licensed Transmitter (PCB)  
**FCC Rule Part(s):** §2 , §22, §24

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M09G7D	QPSK	0.208	23.18
		1M10W7D	16QAM	0.161	22.07
LTE – Band2 (3)	1851.5 - 1908.5	2M69G7D	QPSK	0.210	23.22
		2M70W7D	16QAM	0.171	22.32
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.217	23.37
		13M5W7D	16QAM	0.173	22.38
LTE – Band2 (20)	1860.0 - 1900.0	17M9G7D	QPSK	0.213	23.29
		18M0W7D	16QAM	0.169	22.29


Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5 (1.4)	824.7 – 848.3	1M10G7D	QPSK	0.193	22.85
		1M10W7D	16QAM	0.157	21.95
LTE – Band5 (3)	825.5 – 847.5	2M70G7D	QPSK	0.193	22.85
		2M69W7D	16QAM	0.153	21.86

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

**HCT CO., LTD.** Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by  
: Kyoung Houn Seo  
Test engineer of RF Team



Approved by  
: Sang Jun Lee  
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1506-F022	June 11, 2015	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	6
2. INTRODUCTION .....	7
2.1. EUT DESCRIPTION.....	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS .....	8
3.1 CONDUCTED OUTPUT POWER.....	8
3.2 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	9
3.3 FREQUENCY RANGE.....	10
3.4 PEAK-AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	14
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	15
4. LIST OF TEST EQUIPMENT .....	16
5. SUMMARY OF TEST RESULTS .....	17
6. SAMPLE CALCULATION .....	18
7. TEST DATA .....	19
7.1 CONDUCTED OUTPUT POWER.....	19
7.2 EQUIVALENT ISOTROPIC RADIATED POWER (Band 2) .....	26
7.3 EFFECTIVE RADIATED POWER (Band 5).....	29
7.4 RADIATED SPURIOUS EMISSIONS.....	31
7.4.1 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 2 LTE).....	31
7.4.2 RADIATED SPURIOUS EMISSIONS (3 MHz Band 2 LTE).....	32
7.4.3 RADIATED SPURIOUS EMISSIONS (15 MHz Band 2 LTE).....	33
7.4.4 RADIATED SPURIOUS EMISSIONS (20 MHz Band 2 LTE).....	34
7.4.5 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 5 LTE).....	35
7.4.6 RADIATED SPURIOUS EMISSIONS (3 MHz Band 5 LTE).....	36
7.5 PEAK-TO-AVERAGE RATIO .....	37
7.6 OCCUPIED BANDWIDTH .....	38
7.7 CONDUCTED SPURIOUS EMISSIONS .....	39
7.7.1 BAND EDGE.....	39
7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	40
7.8.1 FREQUENCY STABILITY (1.4 MHz Band 2 LTE).....	40
7.8.2 FREQUENCY STABILITY (3 MHz Band 2 LTE).....	41
7.8.3 FREQUENCY STABILITY (15 MHz Band 2 LTE).....	42
7.8.4 FREQUENCY STABILITY (20 MHz Band 2 LTE).....	43

7.8.5 FREQUENCY STABILITY (1.4 MHz Band 5 LTE).....	44
7.8.6 FREQUENCY STABILITY (3 MHz Band 5 LTE).....	45
8. TEST PLOTS.....	46

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics Inc.

**Address:** 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 451-713, Korea

**FCC ID:** BEJLTTTC10

**Application Type:** FCC Class II Permissive Change

**FCC Classification:** PCS Licensed Transmitter (PCB)

**FCC Rule Part(s):** §2 , §22, §24

**EUT Type:** GSM/WCDMA/LTE Telematics NAD module

**FCC Model(s):** GEN10NADNA

**Tx Frequency:** 1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz))  
1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz))  
1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz))  
1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))  
  
824.7 MHz – 848.3 MHz (LTE – Band 5 (1.4 MHz))  
825.5 MHz – 847.5 MHz (LTE – Band 5 (3 MHz))

**Max. RF Output Power:**

Band 2 (1.4 MHz) :	0.208 W (QPSK) (23.18 dBm)
	0.161 W (16-QAM) (22.07 dBm)
Band 2 (3 MHz) :	0.210 W (QPSK) (23.22 dBm)
	0.171 W (16-QAM) (22.32 dBm)
Band 2 (15 MHz) :	0.217 W (QPSK) (23.37 dBm)
	0.173 W (16-QAM) (22.38 dBm)
Band 2 (20 MHz) :	0.213 W (QPSK) (23.29 dBm)
	0.169 W (16-QAM) (22.29 dBm)
Band 5 (1.4 MHz) :	0.193 W (QPSK) (22.85 dBm)
	0.157 W (16-QAM) (21.95 dBm)
Band 5 (3 MHz) :	0.193 W (QPSK) (22.85 dBm)
	0.153 W (16-QAM) (21.86 dBm)

**Emission Designator(s):**

Band 2 (1.4 MHz) :	1M09G7D (QPSK) / 1M10W7D (16-QAM)
Band 2 (3 MHz):	2M69G7D (QPSK) / 2M70W7D (16-QAM)
Band 2 (15 MHz) :	13M5G7D (QPSK) / 13M5W7D (16-QAM)
Band 2 (20 MHz):	17M9G7D (QPSK) / 18M0W7D (16-QAM)
Band 5 (1.4 MHz) :	1M10G7D (QPSK) / 1M10W7D (16-QAM)
Band 5 (3 MHz) :	2M70G7D (QPSK) / 2M69W7D (16-QAM)

**Date(s) of Tests:** May 19, 2015 ~ June 09, 2015

**Antenna Specification** Manufacturer: Laird Technologies  
Antenna type: MIMO capable vehicle dome antenna  
Peak Gain: Band 2: -0.3 dBi  
Band 5: -2.4 dBi

## **2. INTRODUCTION**

### **2.1. EUT DESCRIPTION**

The LG Electronics Inc. GEN10NADNA GSM/WCDMA/LTE Telematics NAD module consists of LTE 2 and 5.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.**

## **3. DESCRIPTION OF TESTS**

### **3.1 CONDUCTED OUTPUT POWER**

#### Test Procedure

Conducted Output Power is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.2.

#### **5.2.1 Procedure for use with a spectrum/signal analyzer when EUT can be configured to transmit continuously or when sweep triggering/signal gating can be properly implemented**

The EUT is considered to transmit continuously if it can be configured to transmit at a burst duty cycle of greater than or equal to 98% throughout the duration of the measurement. If this condition can be achieved, then the following procedure can be used to measure the average output power of the EUT.

This procedure can also be used when the EUT cannot be configured to transmit continuously, provided that the measurement instrument can be configured to trigger a sweep at the beginning of each full-power transmission burst, and the sweep time is less than or equal to the minimum transmission time during each burst (*i.e.*, no burst off-time is to be included in the measurement).

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Set number of points in sweep  $\geq 2 \times$  span / RBW.
- e) Sweep time = auto-couple.
- f) Detector = RMS (power averaging).
- g) If the EUT can be configured to transmit continuously (*i.e.*, burst duty cycle  $\geq 98\%$ ), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (*i.e.*, burst duty cycle  $< 98\%$ ), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 3.2 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

#### Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-D-2010 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.


The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

#### **Radiated spurious emissions**

: Frequency Range : 30 MHz ~ 10<sup>th</sup> Harmonics of highest channel fundamental frequency.

### 3.3 FREQUENCY RANGE


§22.917(a): Cellular – Mobile Frequency Blocks

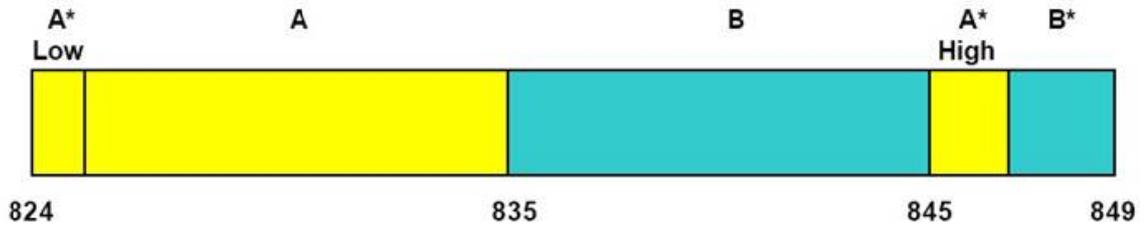

**BLOCK 1:** 824 – 835 MHz (A\* Low + A)  
**BLOCK 2:** 835 – 845 MHz (B)

**BLOCK 3:** 845 – 846.5 MHz (A\* High)  
**BLOCK 4:** 846.5 – 849 MHz (B\*)

§ 24.229: PCS – Mobile Frequency Blocks

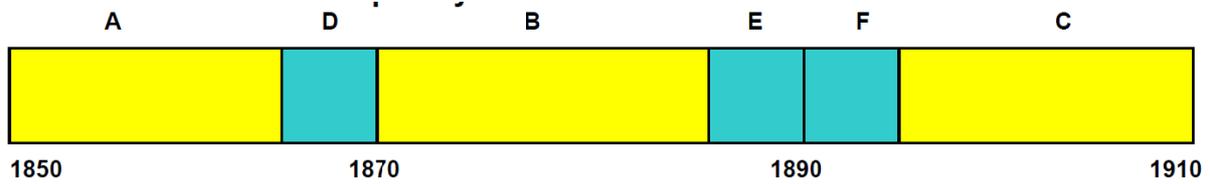

**BLOCK 1:** 1850 – 1865 MHz (A)  
**BLOCK 2:** 1865 – 1870 MHz (D)  
**BLOCK 3:** 1870 – 1885 MHz (B)

**BLOCK 4:** 1885 – 1890 MHz (E)  
**BLOCK 5:** 1890 – 1895 MHz (F)  
**BLOCK 6:** 1895 – 1910 MHz (C)

### 3.4 PEAK-AVERAGE RATIO.

#### Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

#### - Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
  - 1) for continuous transmissions, set to 1 ms,
  - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

#### - Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as  $P_{Pk}$ . Use one of the applicable procedures presented 5.2 to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:  $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$  ( $P_{Avg}$  = Average Power + Duty cycle Factor)

#### 5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW  $\geq$  OBW.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 2 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points  $\geq$  span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

### **5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented**

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

#### **5.2.2.2 Constant burst duty cycle**


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add  $10 \log (1/0.25) = 6$  dB if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

#### Test set-up

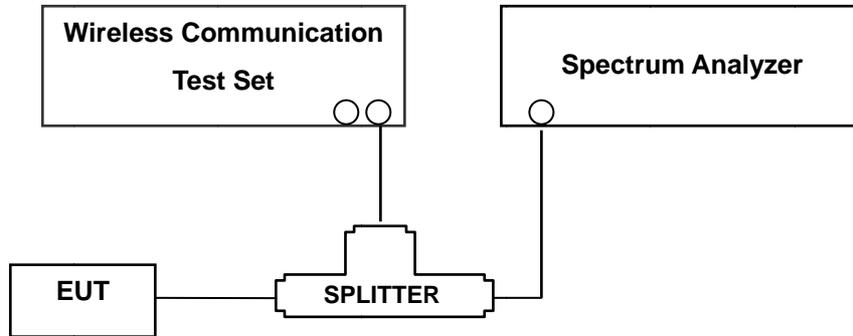

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

#### Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the -13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 30 MHz to 10<sup>th</sup> Harmonics. A display line was placed at -13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.


- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13 dBm.

**NOTES:** The analyzer plot offsets were determined by below conditions.

- For LTE Band 2, total offset 26.8 dBm = 30 dBm attenuator + 6 dBm Divider + 0.8 dBm RF cables.
- For LTE Band 5, total offset 26.1 dBm = 20 dBm attenuator + 6 dBm Divider + 0.1 dBm RF cables.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

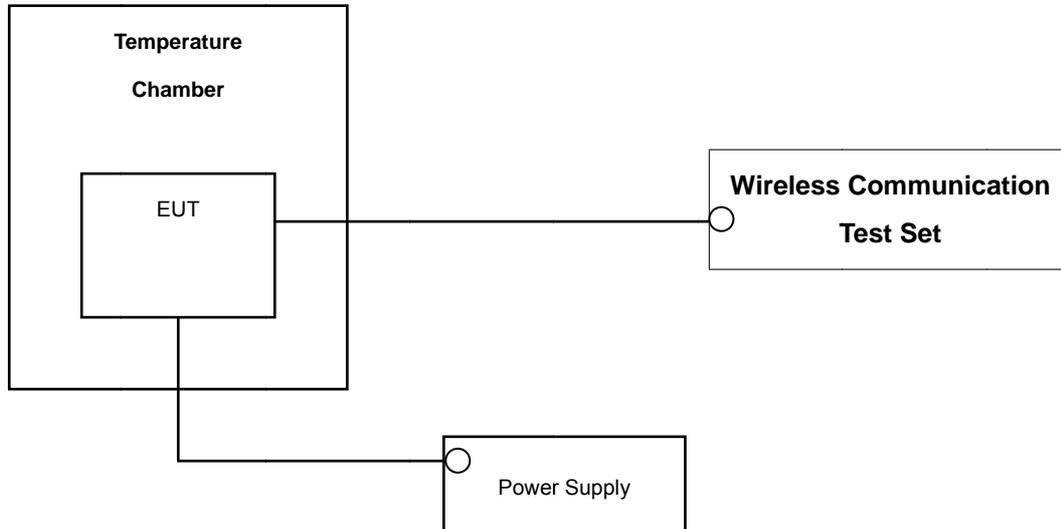

\* Nominal Operating Voltage

#### Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-D-2010 section 2.2.2

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block (LTE Band2). The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. (LTE Band5).

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	N1921A/ Power Sensor	MY45241059	Annual	07/09/2015
Agilent	N1911A/ Power Meter	MY45100523	Annual	01/15/2016
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/04/2015
Wainwright	WHK1.2/15G-10EF/H.P.F	4	Annual	04/27/2016
Wainwright	WRCJV2400/2483.5-2370/2520-60/12SS / B.R.F.	1	Annual	06/17/2015
Wainwright	WHK3.3/18G-10EF/H.P.F	2	Annual	04/27/2016
Hewlett Packard	11667B / Power Splitter	10545	Annual	02/22/2016
Hewlett Packard	11667B / Power Splitter	11275	Annual	04/29/2016
Digital	EP-3010/ Power Supply	3110117	Annual	10/29/2015
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/23/2017
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/23/2017
Korea Engineering	KR-1005L / Chamber	KRAC05063-3CH	Annual	10/29/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	09/01/2016
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	Biennial	07/05/2015
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170541	Biennial	07/05/2015
WEINSCHEL	ATTENUATOR	BR0592	Annual	10/22/2015
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/04/2016
Agilent	8960 (E5515C)/ Base Station	MY48360222	Annual	08/26/2015
Agilent	N9020A/ Signal Analyzer	MY51240695	Annual	02/12/2016
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	Annual	03/24/2016

## 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
2.1046	Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	< 13 dB		PASS
2.1055, 22.355	Frequency stability / variation of ambient temperature	< 2.5 ppm (Part22)		PASS
24.235		Emission must remain in band (Part24)		PASS
22.913(a)(2)	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	< 43 + 10log <sub>10</sub> (P[Watts]) for all out-of band emissions		PASS

## 6. SAMPLE CALCULATION

### A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
LTE Band5	20525	836.60	-6.73	40.89	-10.54	0.96	V	0.869	29.39

**ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a wooden tripod is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

### B. Emission Designator

#### QPSK Modulation

##### **5MHz Bandwidth**

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

##### **10MHz Bandwidth**

**Emission Designator = 8M95G7D**

LTE BW = 8.95 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

##### **5MHz Bandwidth**

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two or more of the following modes;  
amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

##### **10MHz Bandwidth**

**Emission Designator = 8M95W7D**

LTE BW = 8.95 MHz

W = main carrier modulated in a combination of two or more of the following modes;  
amplitude, angle, pulse

7 = Quantized/Digital Info


D = Data transmission; telemetry; telecommand

## 7. TEST DATA

### 7.1 CONDUCTED OUTPUT POWER

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.2.

A base station simulator was used to establish communication with the EUT, and Spectrum analyzer was used for test results. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

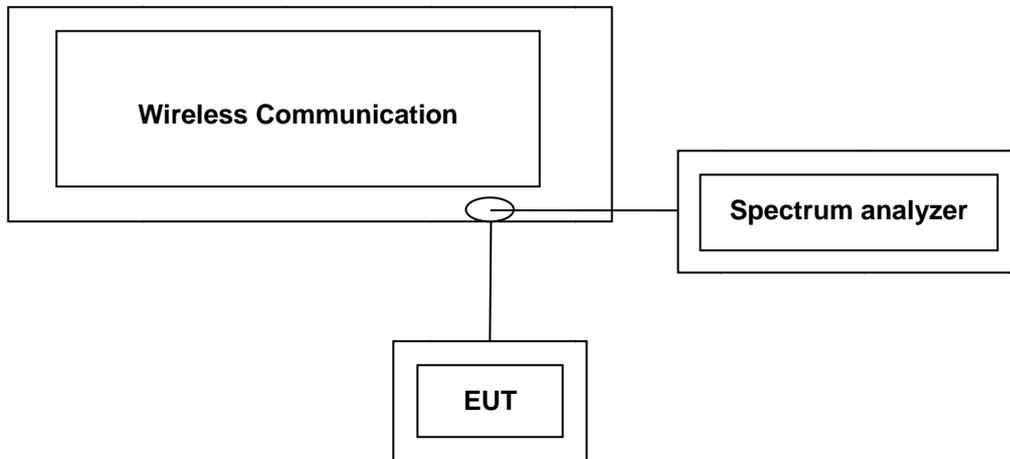

Test Result

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 2	1.4	1850.7	18607	1	0	22.94	22.02
				1	3	22.88	22.01
				1	5	22.79	22.01
				3	0	22.81	21.78
				3	1	22.78	21.75
				3	3	22.72	21.76
				6	0	21.82	20.84
		1880.0	18900	1	0	23.18	22.03
				1	3	23.15	22.06
				1	5	23.16	22.01
				3	0	23.17	22.07
				3	1	23.12	22.05
				3	3	23.15	22.07
				6	0	22.06	21.14
		1909.3	19193	1	0	22.36	21.30
				1	3	22.34	21.24
				1	5	22.31	21.30
				3	0	22.29	21.41
				3	1	22.30	21.41
				3	3	22.28	21.40
				6	0	21.31	20.38

LTE Conducted Average Output Powers (1.4 MHz Band 2 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 2	3	1851.5	18615	1	0	22.93	22.32
				1	7	23.01	22.21
				1	14	22.83	22.27
				8	0	21.84	20.84
				8	3	21.71	20.82
				8	7	21.65	20.74
				15	0	21.74	20.75
		1880.0	18900	1	0	23.15	22.28
				1	7	23.14	22.32
				1	14	23.22	22.25
				8	0	22.13	21.17
				8	3	22.11	21.11
				8	7	22.10	21.17
				15	0	22.04	21.14
		1908.5	19185	1	0	22.44	21.19
				1	7	22.41	21.12
				1	14	22.35	21.09
				8	0	21.43	20.30
				8	3	21.46	20.33
				8	7	21.34	20.27
				15	0	21.38	20.32

LTE Conducted Average Output Powers (3 MHz Band 2 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 2	15	1857.5	18675	1	0	22.81	21.79
				1	36	22.70	21.74
				1	74	22.84	21.78
				36	0	21.67	20.76
				36	18	21.84	20.67
				36	38	21.59	20.65
				75	0	21.74	20.68
		1880.0	18900	1	0	23.22	22.38
				1	36	23.08	22.32
				1	74	23.29	22.33
				36	0	22.06	21.14
				36	18	22.07	21.15
				36	38	22.03	21.11
				75	0	22.04	21.08
		1902.5	19125	1	0	23.37	21.58
				1	36	22.98	21.33
				1	74	22.65	21.15
				36	0	21.60	20.75
				36	18	21.56	20.59
				36	38	21.39	20.45
				75	0	21.57	20.63

LTE Conducted Average Output Powers (15 MHz Band 2 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 2	20	1860.0	18700	1	0	22.75	21.93
				1	49	22.81	22.08
				1	99	22.95	22.01
				50	0	21.61	20.64
				50	25	21.78	20.74
				50	49	21.82	20.84
				100	0	21.80	20.82
		1880.0	18900	1	0	23.26	21.89
				1	49	23.29	21.98
				1	99	23.28	21.90
				50	0	22.11	21.18
				50	25	22.09	21.12
				50	49	21.91	20.93
				100	0	22.05	21.08
		1900.0	19100	1	0	22.90	22.29
				1	49	22.78	22.23
				1	99	22.28	21.82
				50	0	21.87	21.00
				50	25	21.61	20.79
				50	49	21.47	20.54
				100	0	21.62	20.79

LTE Conducted Average Output Powers (20 MHz Band 2 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 5	1.4	824.7	20407	1	0	22.74	21.53
				1	3	22.65	21.55
				1	5	22.81	21.50
				3	0	22.61	21.71
				3	1	22.63	21.68
				3	3	22.57	21.65
				6	0	21.58	20.68
		836.5	20525	1	0	22.85	21.95
				1	3	22.81	21.95
				1	5	22.83	21.93
				3	0	22.81	21.79
				3	1	22.81	21.82
				3	3	22.70	21.64
				6	0	21.83	20.84
		848.3	20643	1	0	22.52	21.76
				1	3	22.40	21.66
				1	5	22.39	21.60
				3	0	22.25	21.40
				3	1	22.29	21.37
				3	3	22.15	21.27
				6	0	21.33	20.38

LTE Conducted Average Output Powers (1.4 MHz Band 5 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 5	3	825.5	20415	1	0	22.70	21.70
				1	7	22.74	21.69
				1	14	22.64	21.56
				8	0	21.60	20.66
				8	3	21.70	20.71
				8	7	21.62	20.63
				15	0	21.59	20.75
		836.5	20525	1	0	22.80	21.63
				1	7	22.85	21.54
				1	14	22.84	21.47
				8	0	21.81	20.82
				8	3	21.65	20.75
				8	7	21.60	20.64
				15	0	21.59	20.65
		847.5	20635	1	0	22.54	21.86
				1	7	22.59	21.84
				1	14	22.35	21.66
				8	0	21.53	20.60
				8	3	21.51	20.50
				8	7	21.38	20.40
				15	0	21.45	20.51

LTE Conducted Average Output Powers (3 MHz Band 5 LTE)

Note : Detecting mode is average.

### 7.2 EQUIVALENT ISOTROPIC RADIATED POWER (Band 2)

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1850.7	1.4	QPSK	-21.10	11.59	10.04	1.36	V	0.106	20.27
		16-QAM	-22.11	10.58	10.04	1.36	V	0.084	19.26
1880.0		QPSK	-21.45	11.51	10.05	1.37	V	0.105	20.19
		16-QAM	-22.51	10.45	10.05	1.37	V	0.082	19.13
1909.3		QPSK	-22.48	10.72	10.06	1.38	V	0.087	19.40
		16-QAM	-23.48	9.72	10.06	1.38	V	0.069	18.40

#### Equivalent Isotropic Radiated Power Output Data (1.4 MHz Band 2 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1.5m ~ 6m cables interchangeably. After testing under all configurations, worst case has been determined for the 1.5m cable.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1851.5	3	QPSK	-21.16	11.53	10.04	1.36	V	0.105	20.21
		16-QAM	-22.19	10.50	10.04	1.36	V	0.083	19.18
1880.0		QPSK	-21.38	11.58	10.05	1.37	V	0.106	20.26
		16-QAM	-22.48	10.48	10.05	1.37	V	0.082	19.16
1908.5		QPSK	-22.35	10.82	10.06	1.38	V	0.089	19.50
		16-QAM	-23.36	9.81	10.06	1.38	V	0.071	18.49

#### Equivalent Isotropic Radiated Power Output Data (3 MHz Band 2 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1.5m ~ 6m cables interchangeably. After testing under all configurations, worst case has been determined for the 1.5m cable.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1857.5	15	QPSK	-21.20	11.49	10.04	1.36	V	0.104	20.17
		16-QAM	-22.21	10.48	10.04	1.36	V	0.082	19.16
1880.0		QPSK	-21.49	11.45	10.04	1.36	V	0.103	20.13
		16-QAM	-22.52	10.42	10.04	1.36	V	0.081	19.10
1902.5		QPSK	-21.75	11.30	10.05	1.38	V	0.099	19.97
		16-QAM	-22.88	10.17	10.05	1.38	V	0.077	18.84

**Equivalent Isotropic Radiated Power Output Data (15 MHz Band 2 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1.5m ~ 6m cables interchangeably. After testing under all configurations, worst case has been determined for the 1.5m cable.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1860.0	20	QPSK	-21.22	11.47	10.04	1.36	V	0.104	20.15
		16-QAM	-22.20	10.49	10.04	1.36	V	0.083	19.17
1880.0		QPSK	-21.43	11.50	10.04	1.36	V	0.104	20.18
		16-QAM	-22.53	10.40	10.04	1.36	V	0.081	19.08
1900.0		QPSK	-21.68	11.38	10.05	1.38	V	0.101	20.05
		16-QAM	-22.73	10.33	10.05	1.38	V	0.079	19.00

**Equivalent Isotropic Radiated Power Output Data ( 20 MHz Band 2 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

This device uses 1.5m ~ 6m cables interchangeably. After testing under all configurations, worst case has been determined for the 1.5m cable.

**NOTES:**

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna.

Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading.

The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

### 7.3 EFFECTIVE RADIATED POWER (Band 5)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
824.7	1.4 MHz	QPSK	-31.37	30.56	-10.59	0.88	H	0.081	19.09
		16-QAM	-32.44	29.49	-10.59	0.88	H	0.063	18.02
836.5		QPSK	-32.36	29.40	-10.54	0.89	H	0.063	17.97
		16-QAM	-33.31	28.45	-10.54	0.89	H	0.050	17.02
848.3		QPSK	-33.39	27.57	-10.49	0.89	H	0.042	16.19
		16-QAM	-34.40	26.56	-10.49	0.89	H	0.033	15.18

**Effective Radiated Power Data (1.4 MHz Band 5 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

This device uses 1.5m ~ 6m cables interchangeably. After testing under all configurations, worst case has been determined for the 1.5m cable.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
825.5	3 MHz	QPSK	-31.37	30.56	-10.59	0.88	H	0.081	19.09
		16-QAM	-32.43	29.50	-10.59	0.88	H	0.064	18.03
836.5		QPSK	-32.13	29.57	-10.54	0.89	H	0.065	18.14
		16-QAM	-33.21	28.49	-10.54	0.89	H	0.051	17.06
847.5		QPSK	-33.43	27.64	-10.50	0.89	H	0.042	16.25
		16-QAM	-34.38	26.69	-10.50	0.89	H	0.034	15.30

**Effective Radiated Power Data (3 MHz Band 5 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

This device uses 1.5m ~ 6m cables interchangeably. After testing under all configurations, worst case has been determined for the 1.5m cable.

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization LTE mode.

## 7.4 RADIATED SPURIOUS EMISSIONS

### 7.4.1 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 2 LTE)

- ▣ OPERATING FREQUENCY : 1850.70 MHz
- ▣ MEASURED OUTPUT POWER: 20.27 dBm = 0.106 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.27 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18607 (1850.7)	3,701.40	-55.25	12.32	-58.91	2.02	V	-48.61	68.88
	5,552.10	-59.09	13.02	-57.97	2.52	V	-47.47	67.74
	7,402.80	-56.54	11.06	-47.17	2.91	V	-39.02	59.29
18900 (1880.0)	3,760.00	-56.06	12.29	-59.66	1.93	V	-49.30	69.57
	5,640.00	-57.22	13.12	-56.29	2.57	V	-45.74	66.01
	7,520.00	-55.97	11.09	-47.13	3.03	V	-39.07	59.34
19193 (1909.3)	3,818.60	-53.14	12.28	-56.17	2.04	V	-45.93	66.20
	5,727.90	-59.88	13.06	-58.69	2.55	V	-48.18	68.45
	7,637.20	-58.60	11.37	-49.16	3.13	V	-40.92	61.19

**7.4.2 RADIATED SPURIOUS EMISSIONS (3 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY : 1880.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.26 dBm = 0.106 W
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.26 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18615 (1851.5)	3,703.00	-55.42	12.32	-59.06	2.02	V	-48.76	69.02
	5,554.50	-57.06	13.03	-55.95	2.52	V	-45.44	65.70
	7,406.00	-58.19	11.05	-48.75	2.92	V	-40.62	60.88
18900 (1880.0)	3,760.00	-55.45	12.29	-59.05	1.93	V	-48.69	68.95
	5,640.00	-57.10	13.12	-56.17	2.57	V	-45.62	65.88
	7,520.00	-56.53	11.09	-47.69	3.03	V	-39.63	59.89
19185 (1908.5)	3,817.00	-52.35	12.28	-55.46	2.04	V	-45.22	65.48
	5,725.50	-57.46	13.07	-56.27	2.56	V	-45.76	66.02
	7,634.00	-58.67	11.37	-49.22	3.16	V	-41.01	61.27

**7.4.3 RADIATED SPURIOUS EMISSIONS (15 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY : 1857.50 MHz
- ▣ MEASURED OUTPUT POWER: 20.17 dBm = 0.104 W
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.17 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18675 (1857.5)	3,715.00	-55.15	12.31	-58.84	2.03	V	-48.56	68.73
	5,572.50	-56.61	13.06	-55.39	2.50	V	-44.83	65.00
	7,430.00	-56.46	11.04	-47.30	2.92	V	-39.18	59.35
18900 (1880.0)	3,760.00	-55.82	12.29	-59.42	1.93	V	-49.06	69.23
	5,640.00	-56.85	13.12	-55.92	2.57	V	-45.37	65.54
	7,520.00	-55.91	11.09	-47.07	3.03	V	-39.01	59.18
19125 (1902.5)	3,805.00	-57.61	12.30	-60.98	2.04	V	-50.72	70.89
	5,707.50	-57.50	13.12	-56.09	2.51	V	-45.48	65.65
	7,610.00	-57.71	11.31	-48.58	3.09	V	-40.36	60.53

**7.4.4 RADIATED SPURIOUS EMISSIONS (20 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY : 1880.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.18 dBm = 0.104 W
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.18 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18700 (1860.0)	3,720.00	-55.25	12.31	-59.04	2.07	V	-48.80	68.98
	5,580.00	-58.90	13.07	-57.62	2.51	V	-47.06	67.24
	7,440.00	-57.24	11.04	-47.93	2.92	V	-39.81	59.99
18900 (1880.0)	3,760.00	-57.49	12.29	-61.09	1.93	V	-50.73	70.91
	5,640.00	-58.12	13.12	-57.19	2.57	V	-46.64	66.82
	7,520.00	-56.69	11.09	-47.85	3.03	V	-39.79	59.97
19100 (1900.0)	3,800.00	-55.92	12.30	-59.21	2.04	V	-48.95	69.13
	5,700.00	-56.75	13.13	-55.57	2.52	V	-44.96	65.14
	7,600.00	-57.96	11.29	-48.72	3.05	V	-40.48	60.66

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. This device uses 1.5m ~ 6m cables interchangeably. After testing under all configurations, worst case has been determined for the 1.5m cable.

**7.4.5 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 5 LTE)**

- ▣ OPERATING FREQUENCY : 824.70 MHz
- ▣ MEASURED OUTPUT POWER: 19.09 dBm = 0.081 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.09 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20407 (824.7)	1,649.40	-49.75	9.71	-57.79	1.29	V	-49.37	68.46
	2,474.10	-59.42	10.54	-64.54	1.60	V	-55.60	74.69
	3,298.80	-58.75	12.23	-63.83	1.85	V	-53.45	72.54
20525 (836.5)	1,673.00	-49.33	9.78	-57.50	1.28	V	-49.00	68.09
	2,509.50	-47.74	10.65	-52.74	1.61	V	-43.70	62.79
	3,346.00	-58.28	12.41	-63.76	1.86	V	-53.21	72.30
20643 (848.3)	1,696.60	-50.65	9.84	-58.87	1.30	V	-50.33	69.42
	2,544.90	-58.87	10.72	-63.76	1.63	V	-54.67	73.76
	3,393.20	-58.59	12.40	-63.88	1.87	V	-53.35	72.44

**7.4.6 RADIATED SPURIOUS EMISSIONS (3 MHz Band 5 LTE)**

- ▣ OPERATING FREQUENCY : 825.50 MHz
- ▣ MEASURED OUTPUT POWER: 19.09 dBm = 0.081 W
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.09 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20415 (825.5)	1,651.00	-49.76	9.71	-57.80	1.29	V	-49.38	68.47
	2,476.50	-58.96	10.54	-64.03	1.61	V	-55.10	74.19
	3,302.00	-58.03	12.25	-63.16	1.85	V	-52.76	71.85
20525 (836.5)	1,673.00	-49.64	9.78	-57.81	1.28	V	-49.31	68.40
	2,509.50	-47.72	10.65	-52.72	1.61	V	-43.68	62.77
	3,346.00	-58.87	12.41	-64.35	1.86	V	-53.80	72.89
20635 (847.5)	1,695.00	-49.97	9.84	-58.21	1.30	V	-49.67	68.76
	2,542.50	-56.24	10.72	-61.10	1.63	V	-52.01	71.10
	3,390.00	-58.59	12.40	-63.82	1.84	V	-53.26	72.35

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. This device uses 1.5m ~ 6m cables interchangeably. After testing under all configurations, worst case has been determined for the 1.5m cable.

### 7.5 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( dB )
Band 2	1.4 MHz	1880.0	QPSK	6	0	5.62
			16-QAM	6	0	6.50
	3 MHz		QPSK	15	0	5.69
			16-QAM	15	0	6.52
	15 MHz		QPSK	75	0	5.67
			16-QAM	75	0	6.41
	20 MHz		QPSK	100	0	5.69
			16-QAM	100	0	6.46

- Plots of the EUT's Peak- to- Average Ratio are shown Page 53 ~ 56.

### 7.6 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Band 2	1.4 MHz	1880.0	QPSK	6	0	1.0934
			16-QAM	6	0	1.0967
	3 MHz		QPSK	15	0	2.6947
			16-QAM	15	0	2.6955
	15 MHz		QPSK	75	0	13.4810
			16-QAM	75	0	13.4650
	20 MHz		QPSK	100	0	17.9310
			16-QAM	100	0	17.9630

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Band 5	1.4 MHz	836.5	QPSK	6	0	1.0960
			16-QAM	6	0	1.0962
	3 MHz		QPSK	15	0	2.7034
			16-QAM	15	0	2.6949

- Plots of the EUT's Occupied Bandwidth are shown Page 47 ~ 52.

### 7.7 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 2	1.4	1850.7	QPSK	1	0	16.6870	-30.42
		1880.0		1	0	16.9550	-30.22
		1909.3		1	0	16.3835	-30.20
	3	1851.5		1	0	16.9300	-30.08
		1880.0		1	0	16.2335	-30.62
		1908.5		1	0	16.8285	-30.18
	15	1857.5		1	0	16.4475	-29.61
		1880.0		1	0	16.8310	-30.98
		1902.5		1	0	16.7705	-30.20
	20	1860.0		1	0	16.6605	-30.28
		1880.0		1	0	17.0955	-30.37
		1900.0		1	0	16.7245	-30.38

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 5	1.4	824.7	QPSK	1	0	3.164082	-31.69
		836.5		1	0	3.322625	-31.28
		848.3		1	0	3.215273	-32.21
	3	825.5		1	0	3.076113	-32.40
		836.5		1	0	2.706345	-32.49
		847.5		1	0	5.658000	-32.72

- Plots of the EUT's Conducted Spurious Emissions are shown Page 75 ~ 92.

#### 7.7.1 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 57 ~ 74.

**7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**

**7.8.1 FREQUENCY STABILITY (1.4 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1880 000 012	0	0.000 000	0.000
100%		-30	1880 000 001	-10.70	-0.000 001	-0.006
100%		-20	1880 000 027	14.60	0.000 001	0.008
100%		-10	1880 000 022	10.10	0.000 001	0.005
100%		0	1880 000 025	13.50	0.000 001	0.007
100%		+10	1879 999 990	-22.20	-0.000 001	-0.012
100%		+30	1880 000 000	-12.20	-0.000 001	-0.006
100%		+40	1880 000 005	-7.00	0.000 000	-0.004
100%		+50	1879 999 999	-13.00	-0.000 001	-0.007
Batt. Endpoint	10.2	+20	1880 000 002	-10.30	-0.000 001	-0.005

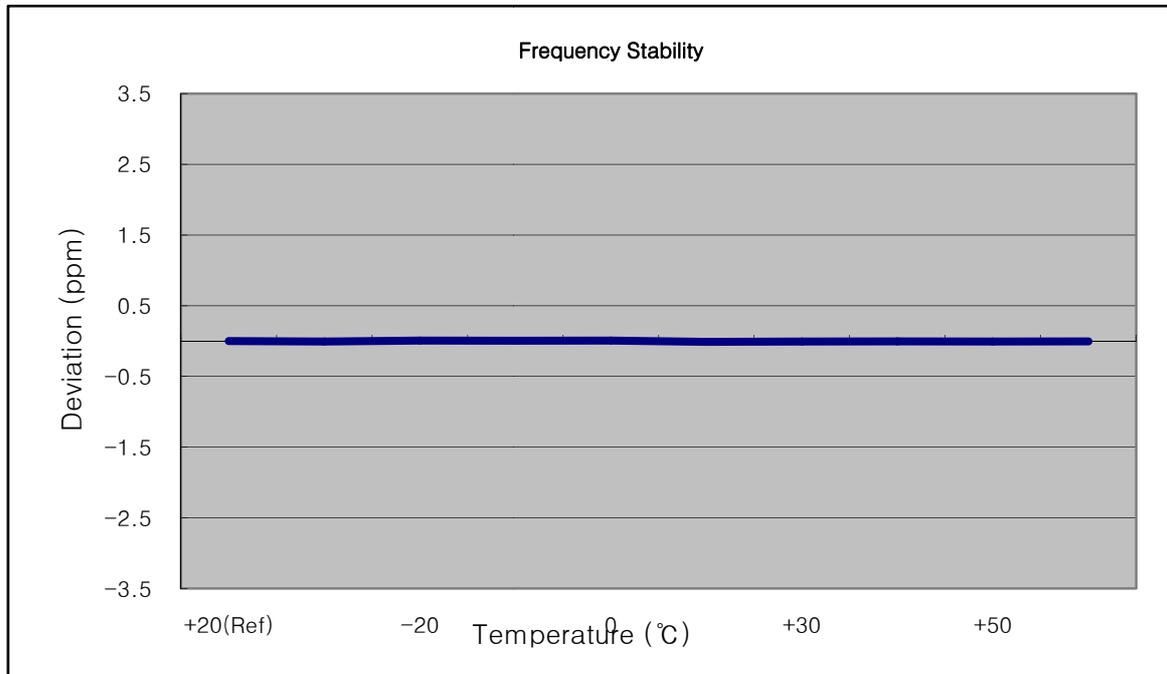

**7.8.2 FREQUENCY STABILITY (3 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1880 000 022	0	0.000 000	0.000
100%		-30	1880 000 037	14.50	0.000 001	0.008
100%		-20	1879 999 999	-23.00	-0.000 001	-0.012
100%		-10	1879 999 998	-23.70	-0.000 001	-0.013
100%		0	1879 999 998	-23.80	-0.000 001	-0.013
100%		+10	1880 000 007	-15.00	-0.000 001	-0.008
100%		+30	1880 000 006	-16.00	-0.000 001	-0.009
100%		+40	1880 000 005	-16.60	-0.000 001	-0.009
100%		+50	1880 000 012	-10.30	-0.000 001	-0.005
Batt. Endpoint	10.2	+20	1880 000 008	-13.70	-0.000 001	-0.007

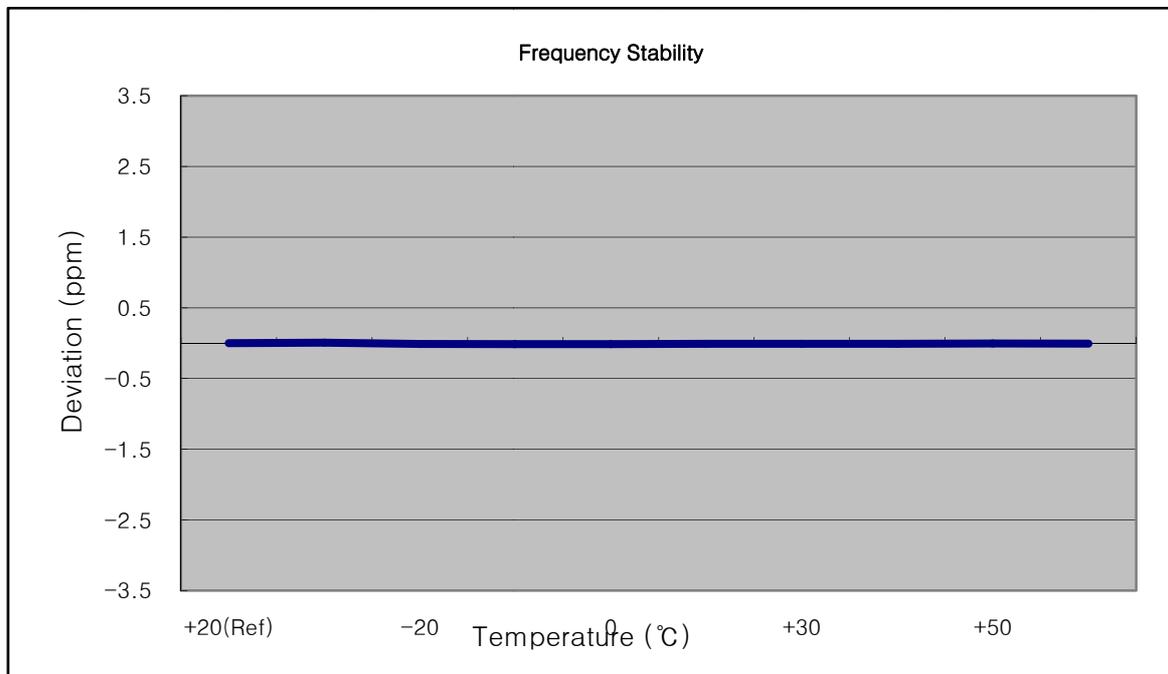

**7.8.3 FREQUENCY STABILITY (15 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1879 999 990	0	0.000 000	0.000
100%		-30	1879 999 981	-8.80	0.000 000	-0.005
100%		-20	1879 999 977	-13.20	-0.000 001	-0.007
100%		-10	1879 999 970	-20.50	-0.000 001	-0.011
100%		0	1879 999 972	-17.70	-0.000 001	-0.009
100%		+10	1879 999 967	-22.80	-0.000 001	-0.012
100%		+30	1880 000 001	10.60	0.000 001	0.006
100%		+40	1879 999 996	6.00	0.000 000	0.003
100%		+50	1879 999 977	-13.50	-0.000 001	-0.007
Batt. Endpoint	10.2	+20	1879 999 973	-16.80	-0.000 001	-0.009

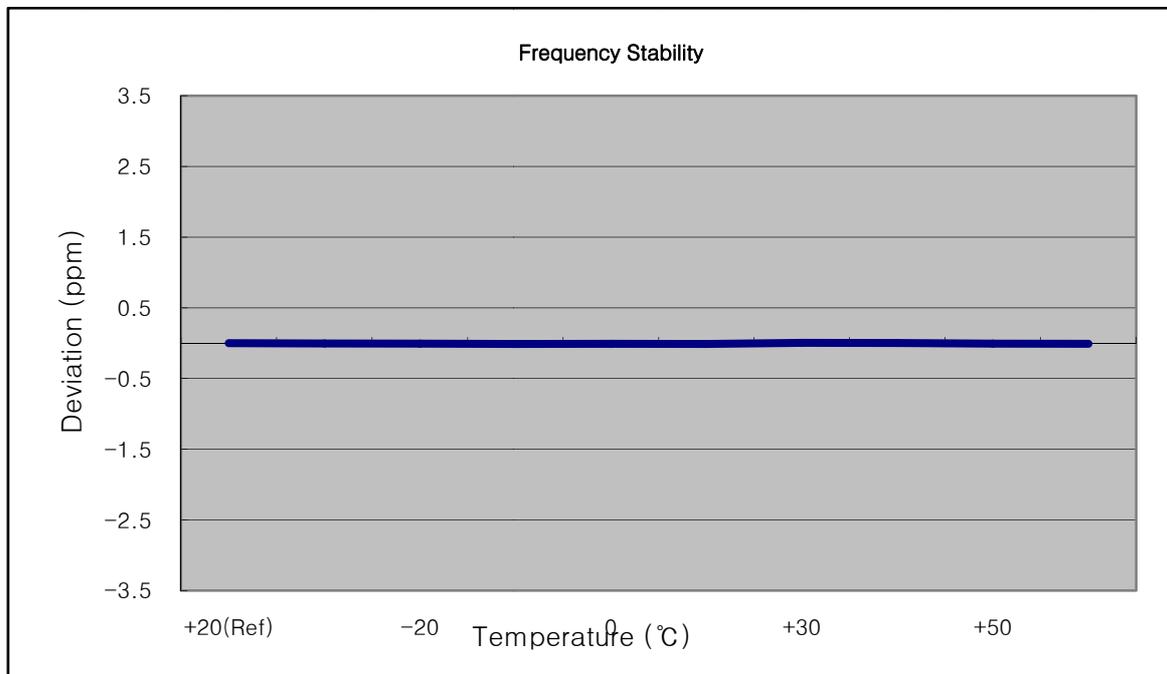

**7.8.4 FREQUENCY STABILITY (20 MHz Band 2 LTE)**

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	1879 999 989	0	0.000 000	0.000
100%		-30	1879 999 983	-5.90	0.000 000	-0.003
100%		-20	1879 999 978	-10.90	-0.000 001	-0.006
100%		-10	1879 999 969	-20.00	-0.000 001	-0.011
100%		0	1879 999 961	-28.20	-0.000 002	-0.015
100%		+10	1879 999 980	-9.20	0.000 000	-0.005
100%		+30	1879 999 976	-13.80	-0.000 001	-0.007
100%		+40	1879 999 974	-15.00	-0.000 001	-0.008
100%		+50	1879 999 968	-21.50	-0.000 001	-0.011
Batt. Endpoint	10.2	+20	1879 999 962	-27.60	-0.000 001	-0.015

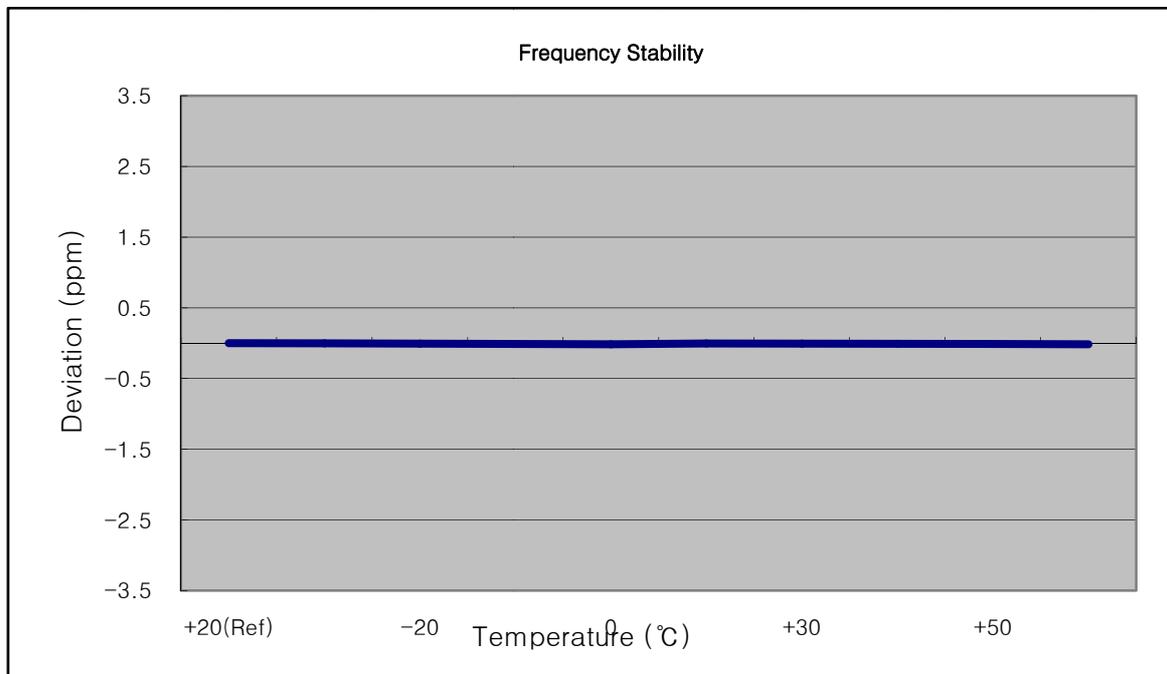

**7.8.5 FREQUENCY STABILITY (1.4 MHz Band 5 LTE)**

- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	836 499 994	0	0.000 000	0.000
100%		-30	836 500 003	9.10	0.000 001	0.011
100%		-20	836 499 987	-6.60	-0.000 001	-0.008
100%		-10	836 500 001	6.80	0.000 001	0.008
100%		0	836 500 003	9.20	0.000 001	0.011
100%		+10	836 500 004	10.40	0.000 001	0.012
100%		+30	836 500 002	8.50	0.000 001	0.010
100%		+40	836 499 999	5.40	0.000 001	0.006
100%		+50	836 500 003	8.60	0.000 001	0.010
Batt. Endpoint		10.2	+20	836 499 989	-5.40	-0.000 001

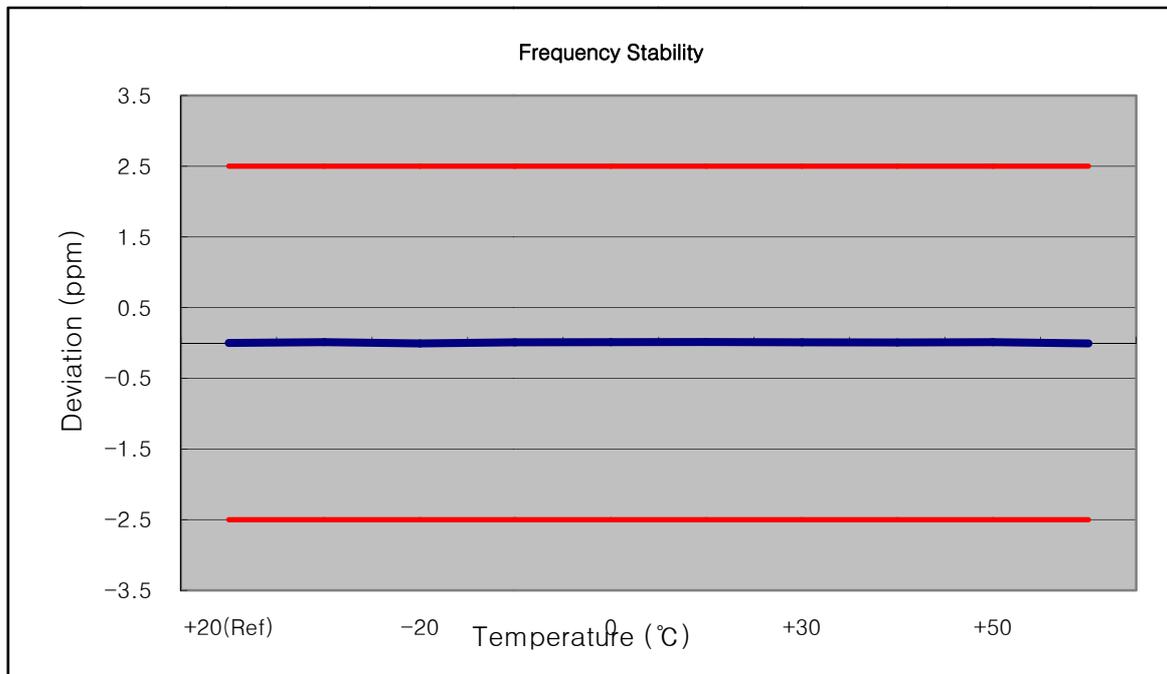

**7.8.6 FREQUENCY STABILITY (3 MHz Band 5 LTE)**


- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (3 MHz)
- ▣ REFERENCE VOLTAGE: 12.0 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.0	+20(Ref)	836 499 990	0	0.000 000	0.000
100%		-30	836 499 996	6.30	0.000 001	0.008
100%		-20	836 499 995	4.80	0.000 001	0.006
100%		-10	836 499 995	5.70	0.000 001	0.007
100%		0	836 499 998	8.60	0.000 001	0.010
100%		+10	836 499 999	9.10	0.000 001	0.011
100%		+30	836 500 000	10.50	0.000 001	0.013
100%		+40	836 499 984	-5.90	-0.000 001	-0.007
100%		+50	836 499 985	-4.80	-0.000 001	-0.006
Batt. Endpoint		10.2	+20	836 499 998	8.50	0.000 001

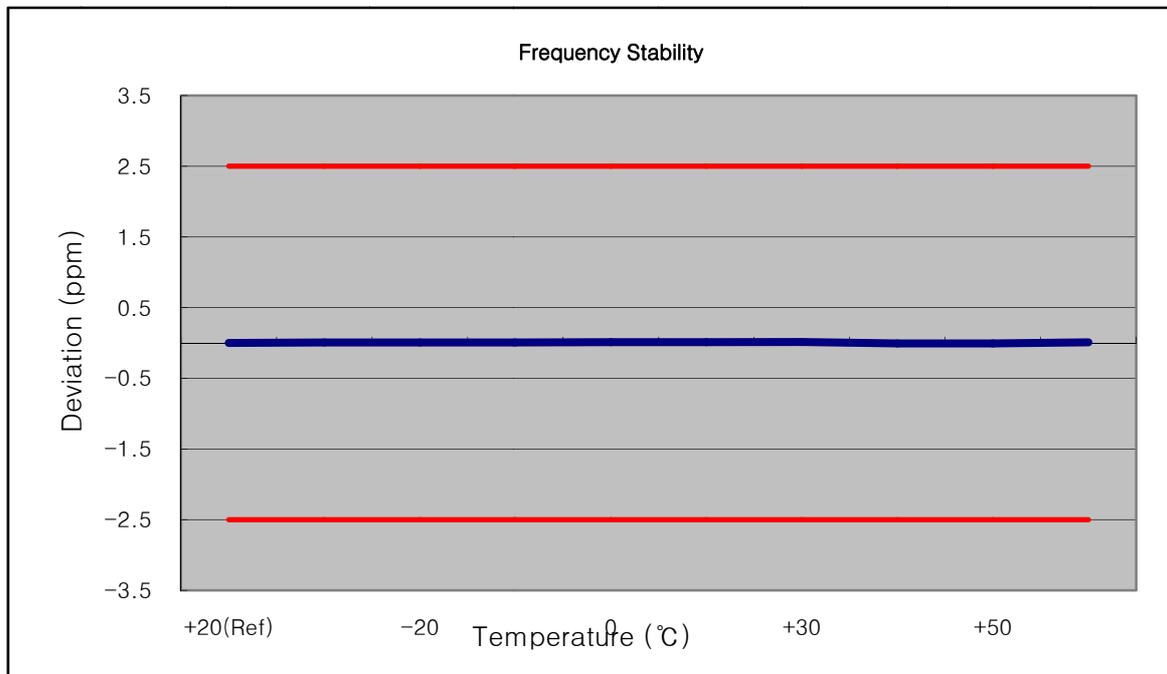


## **8. TEST PLOTS**


BAND 2. Occupied Bandwidth Plot (1.4M BW Ch.18900 QPSK RB 6\_0)

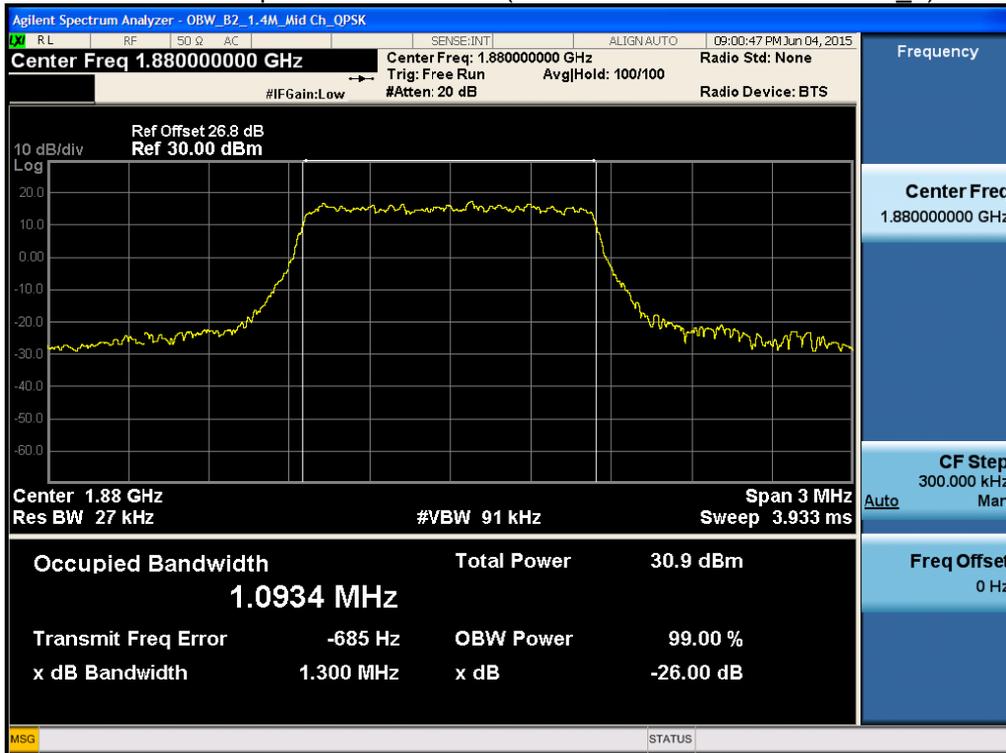


BAND 2. Occupied Bandwidth Plot (1.4M BW Ch.18900 16QAM RB 6\_0)

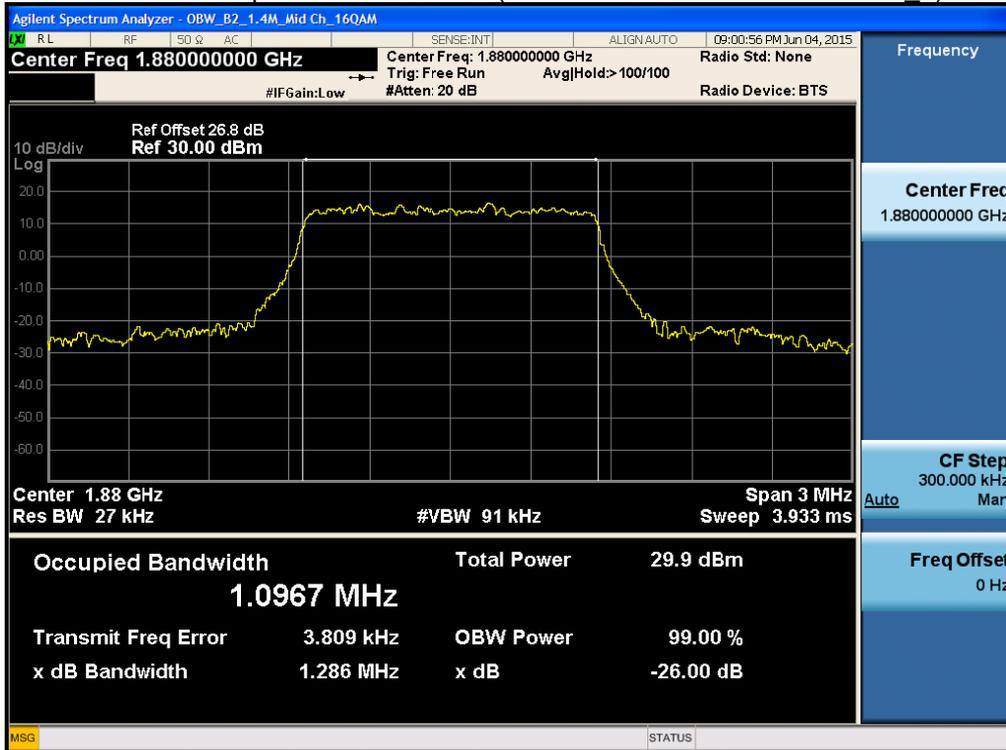


BAND 2. Occupied Bandwidth Plot (3M BW Ch.18900 QPSK RB 15\_0)

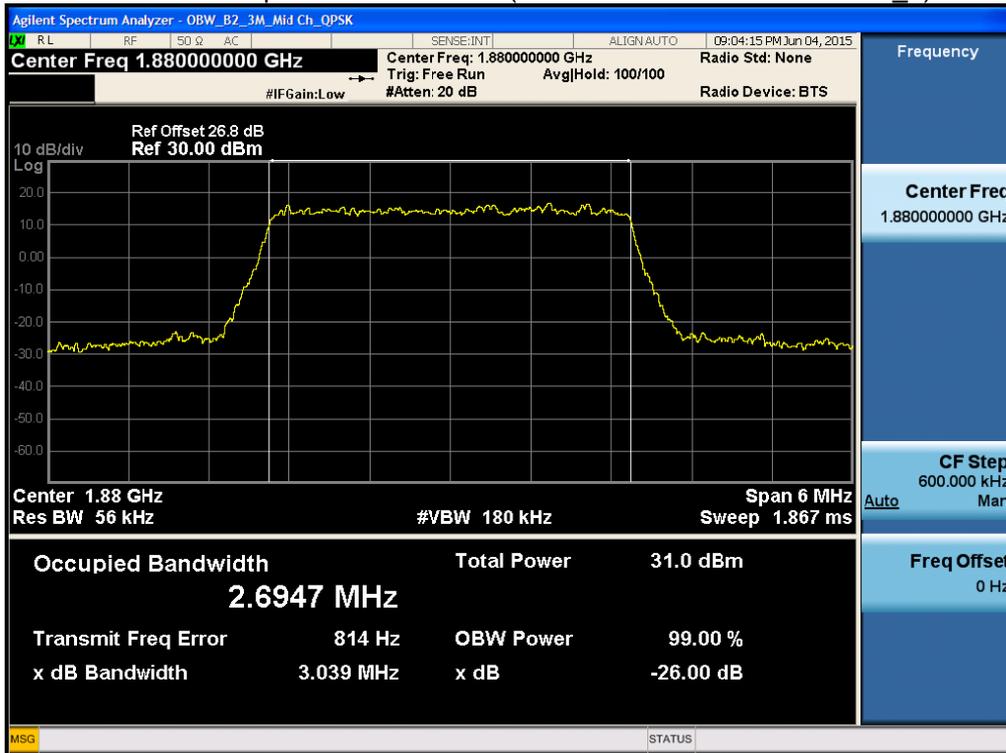


BAND 2. Occupied Bandwidth Plot (3M BW Ch.18900 16QAM RB 15\_0)

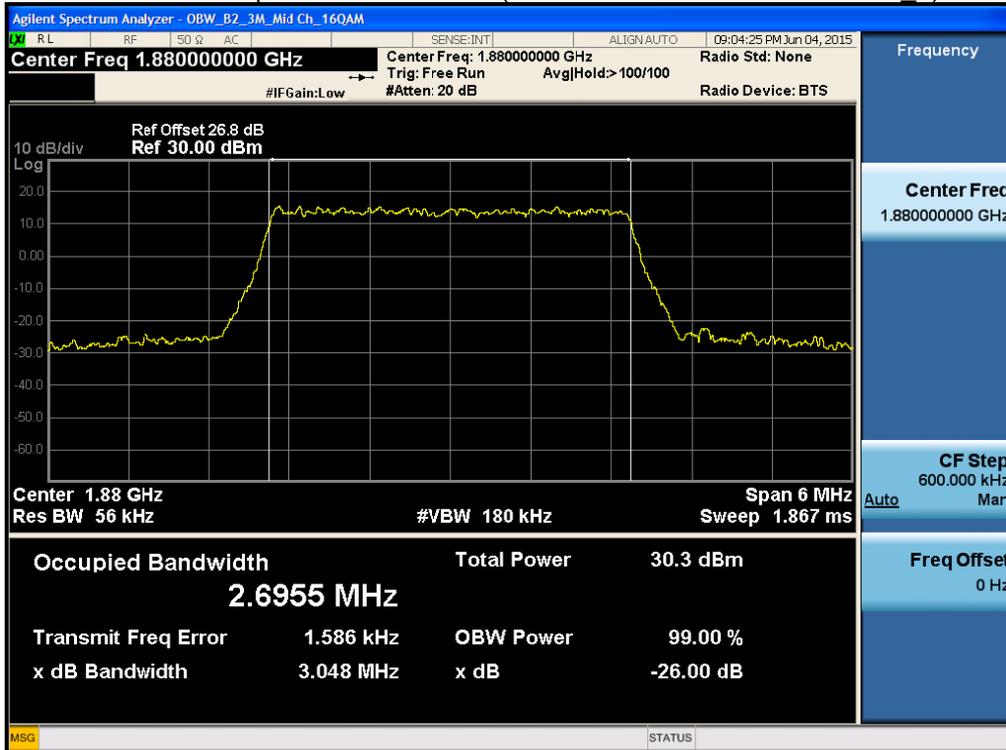


**BAND 2. Occupied Bandwidth Plot (15M BW Ch.18900 QPSK RB 75\_0)**

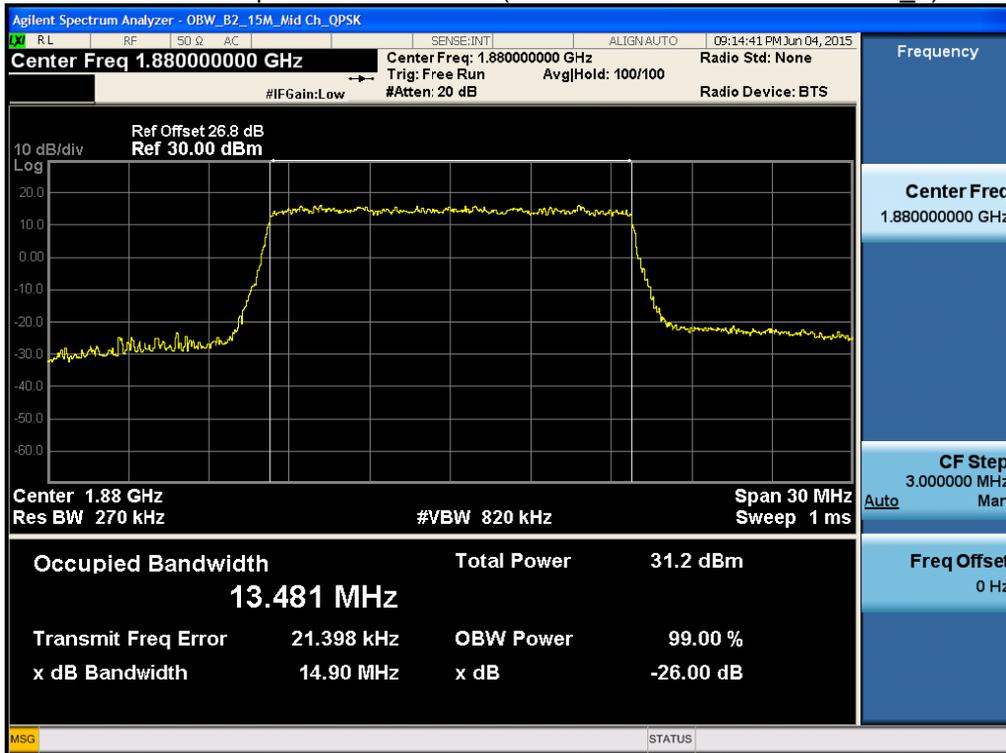


**BAND 2. Occupied Bandwidth Plot (15M BW Ch.18900 16QAM RB 75\_0)**

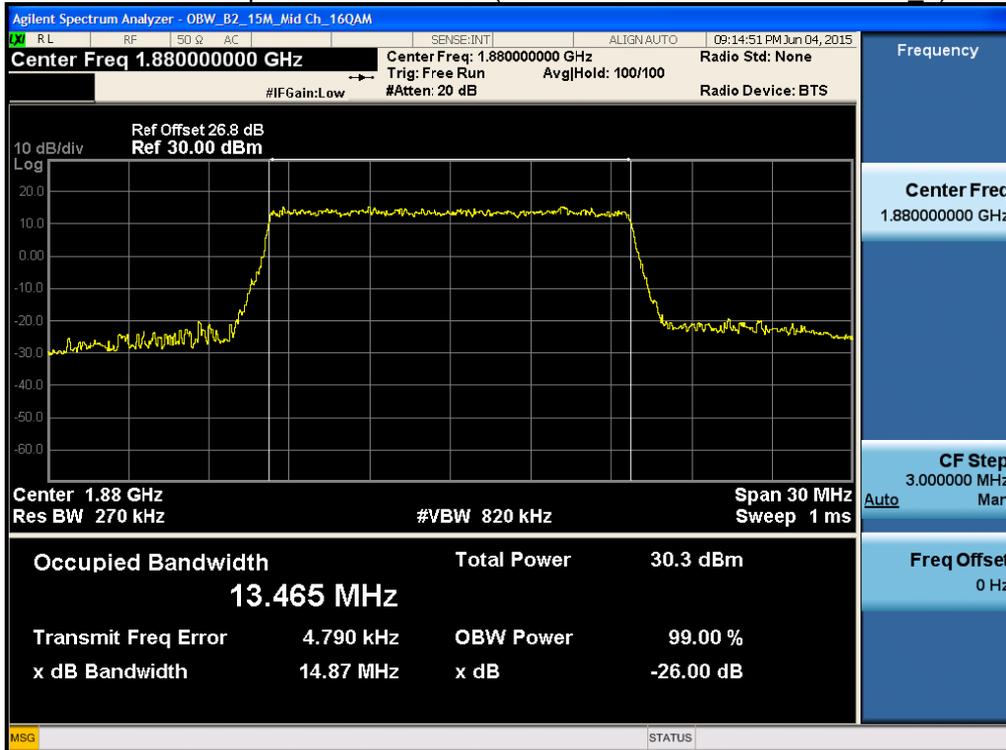


BAND 2. Occupied Bandwidth Plot (20M BW Ch.18900 QPSK RB 100\_0)

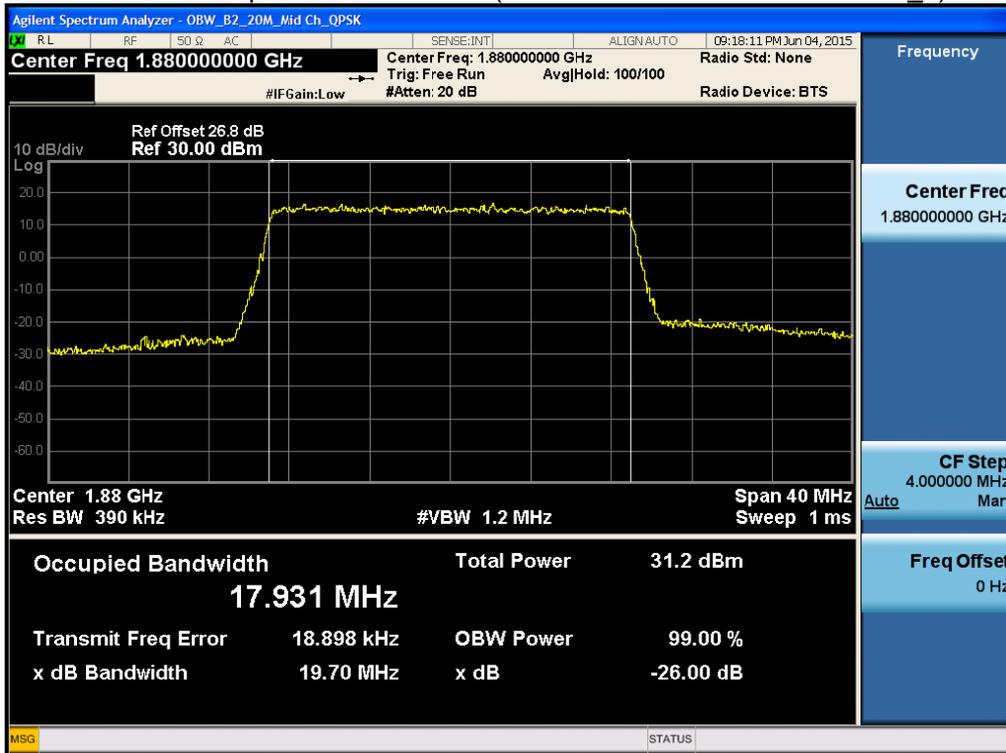


BAND 2. Occupied Bandwidth Plot (20M BW Ch.18900 16QAM RB 100\_0)

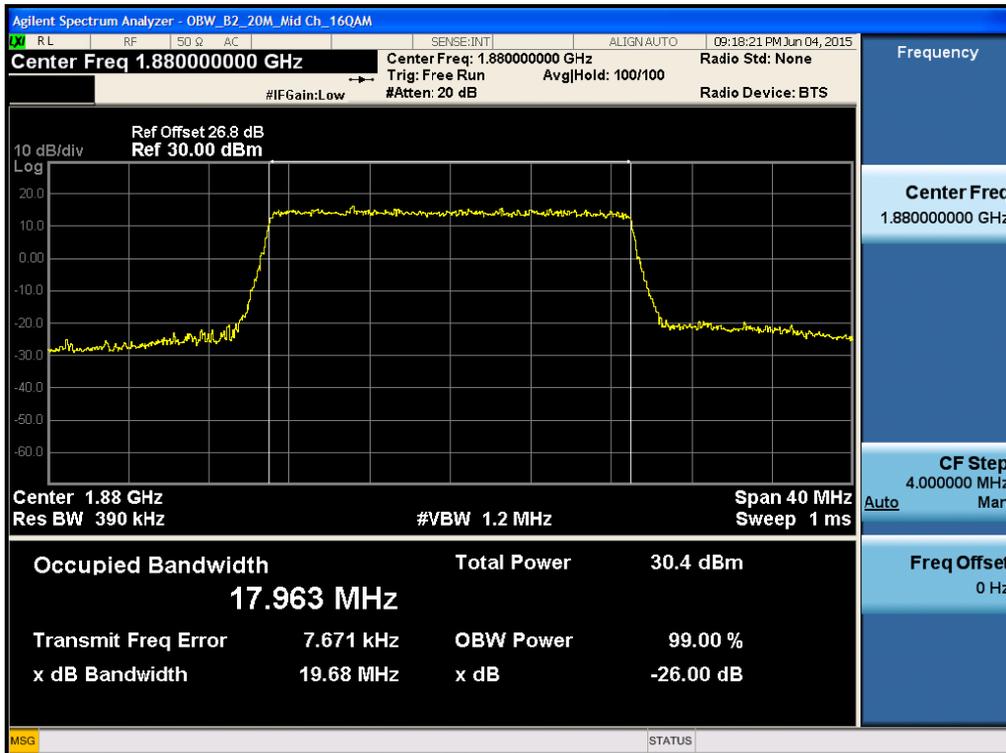


BAND 5. Occupied Bandwidth Plot (1.4M BW Ch.20525 QPSK\_RB6\_0)

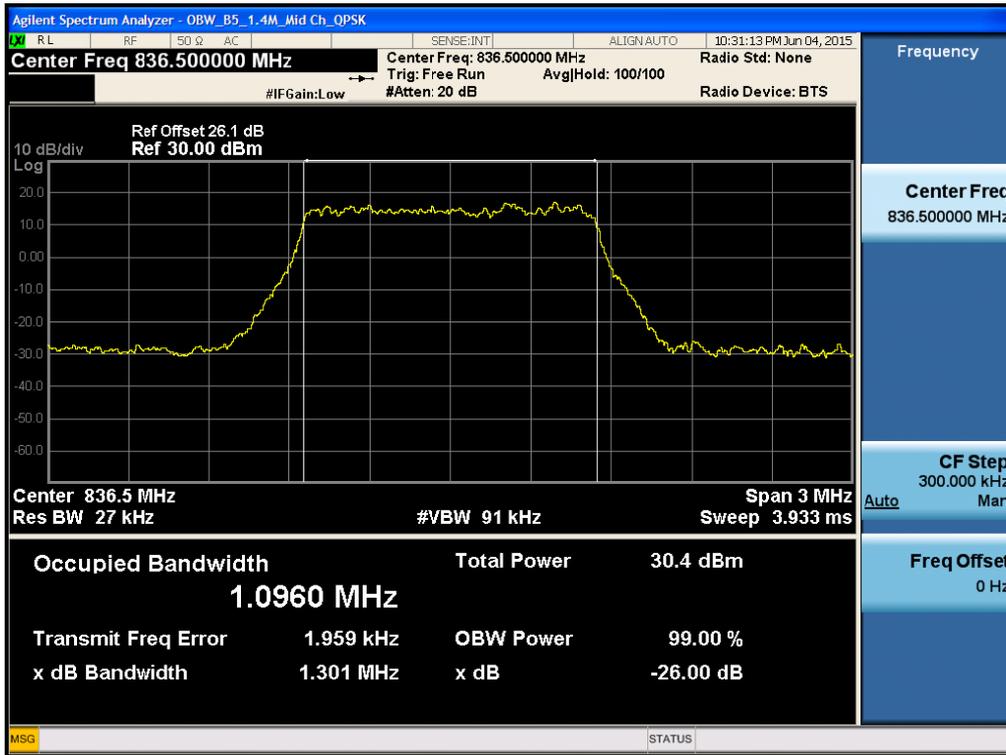


BAND 5. Occupied Bandwidth Plot (1.4M BW Ch.20525 16QAM\_RB6\_0)

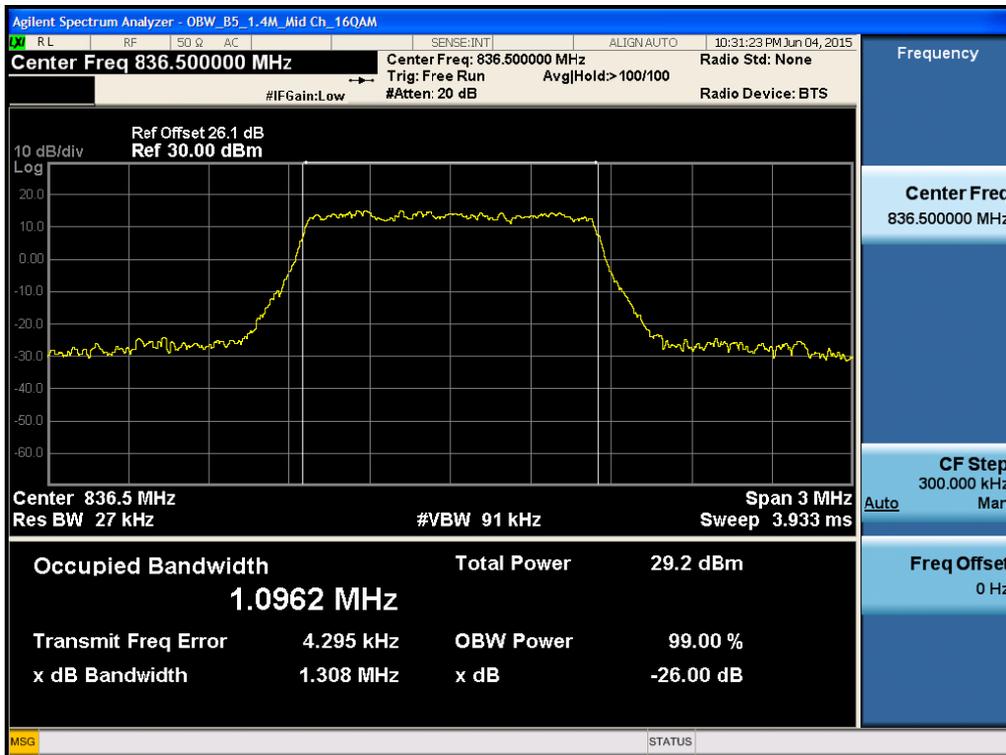

BAND 5. Occupied Bandwidth Plot (3M BW Ch.20525 QPSK\_RB15\_0)

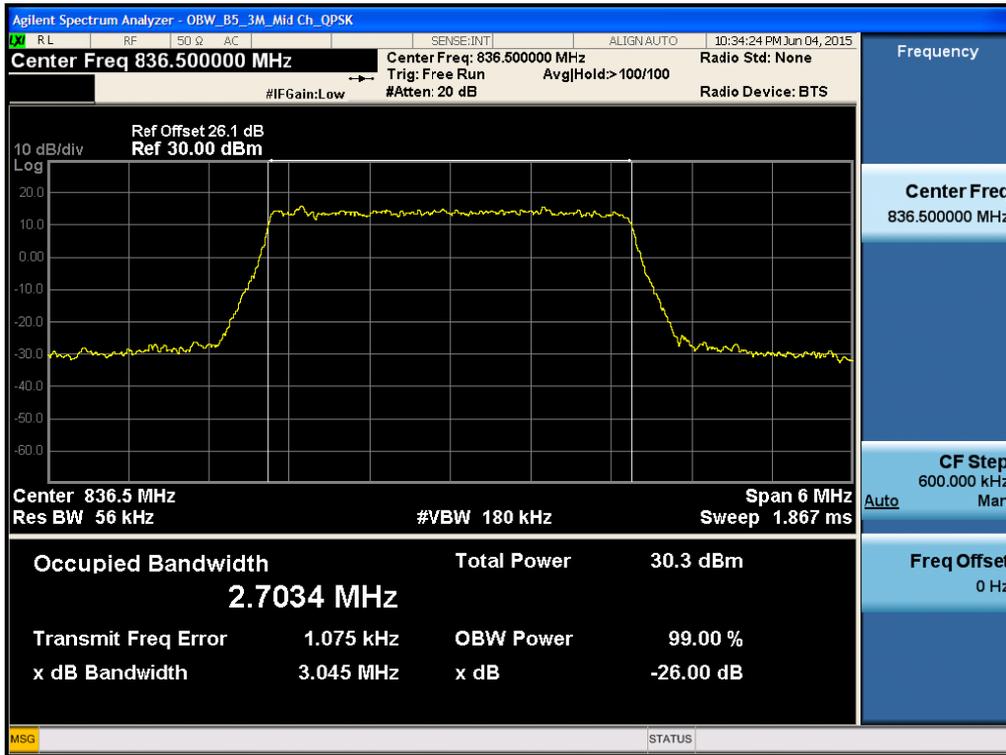


BAND 5. Occupied Bandwidth Plot (3M BW Ch.20525 16QAM\_RB15\_0)

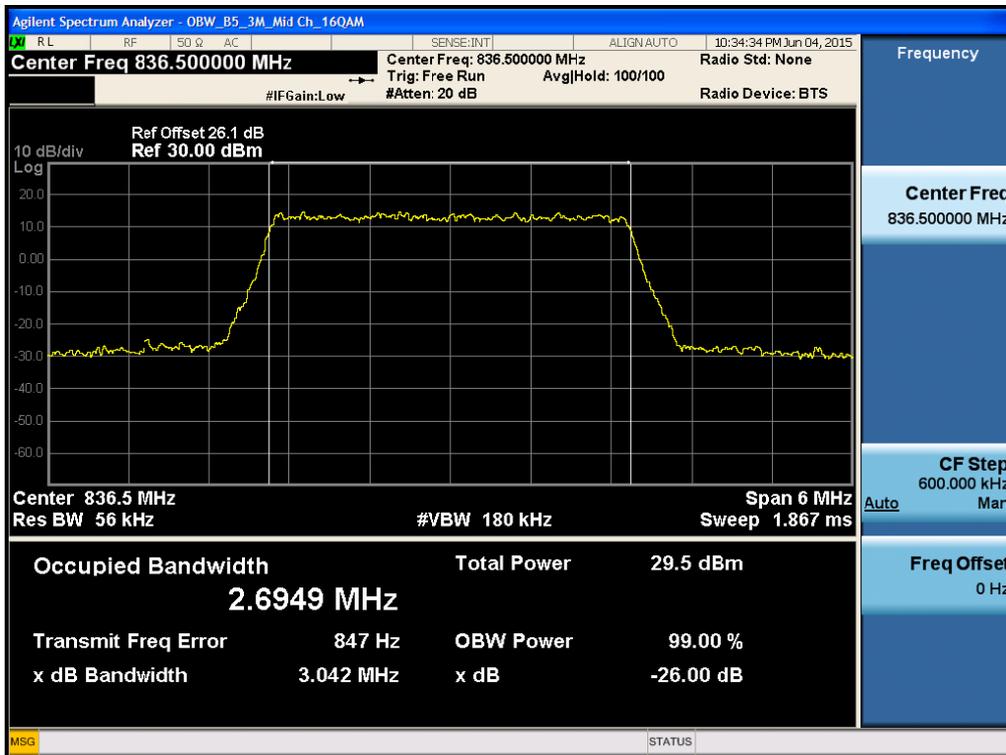


BAND 2. PAR Plot (1.4M BW Ch.18900 QPSK RB 6\_0)




BAND 2. PAR Plot (1.4M BW Ch.18900 16QAM RB 6\_0)

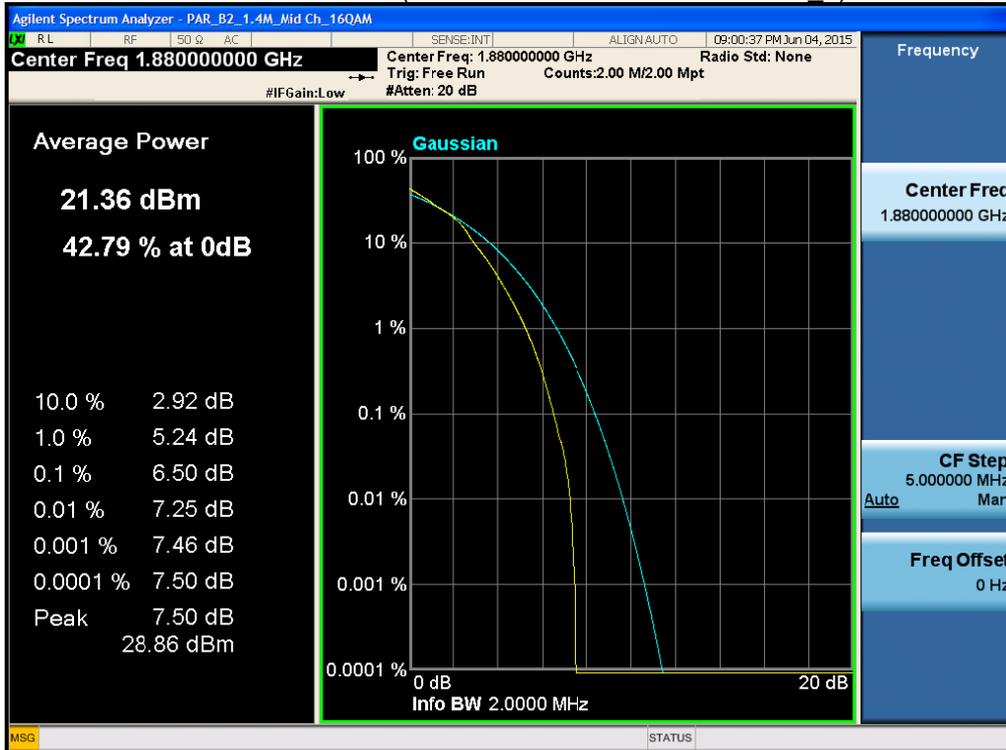


BAND 2. PAR Plot (3M BW Ch.18900 QPSK RB 15\_0)

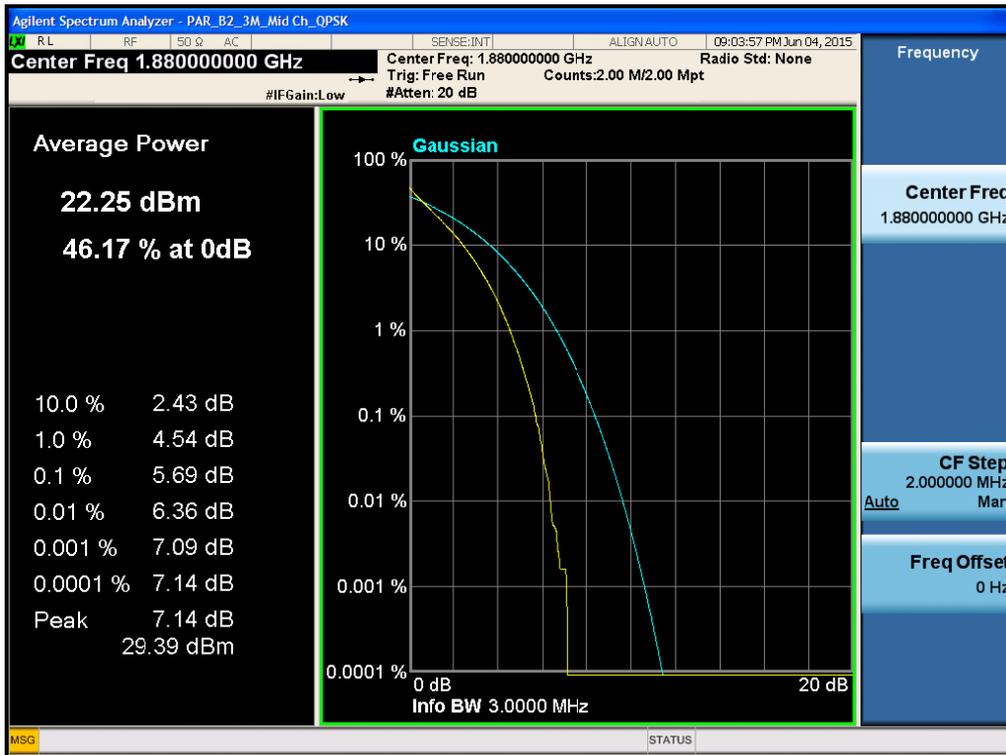

BAND 2. PAR Plot (3M BW Ch.18900 16QAM RB 15\_0)

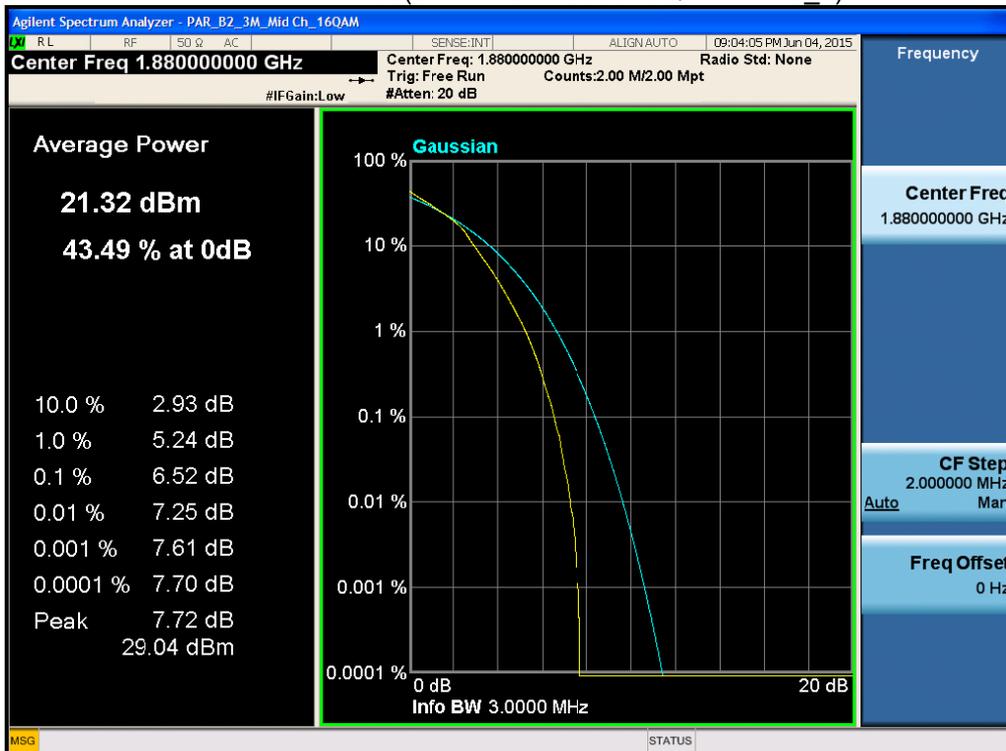


BAND 2. PAR Plot (15M BW Ch.18900 QPSK RB 75\_0)

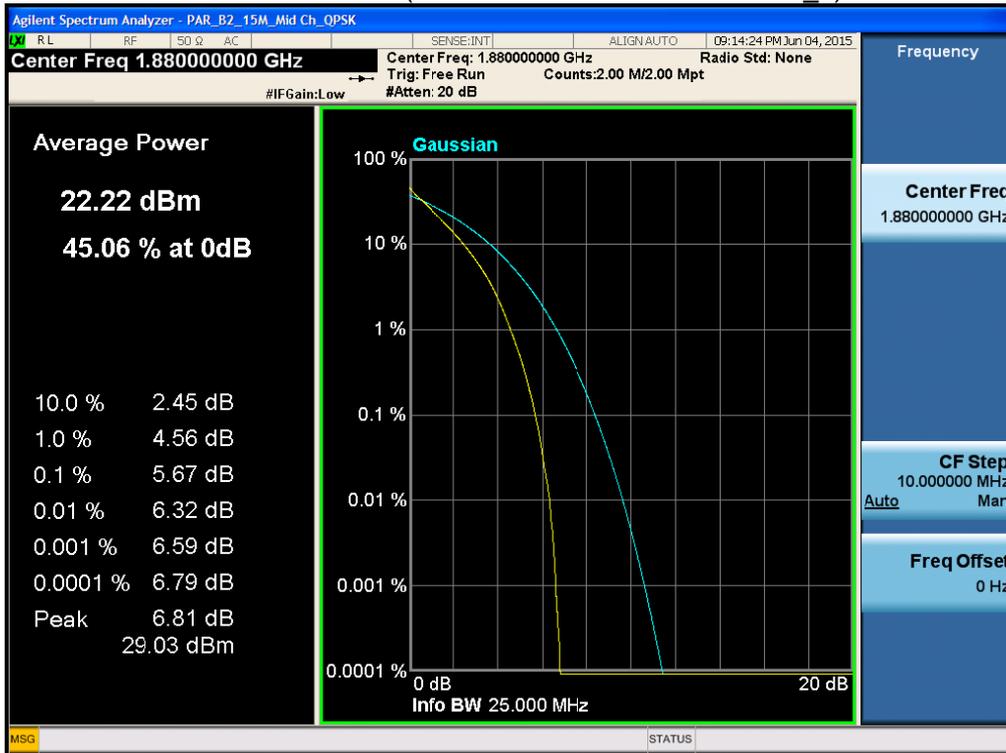

BAND 2. PAR Plot (15M BW Ch.18900 16QAM RB 75\_0)




BAND 2. PAR Plot (20M BW Ch.18900 QPSK RB 100\_0)

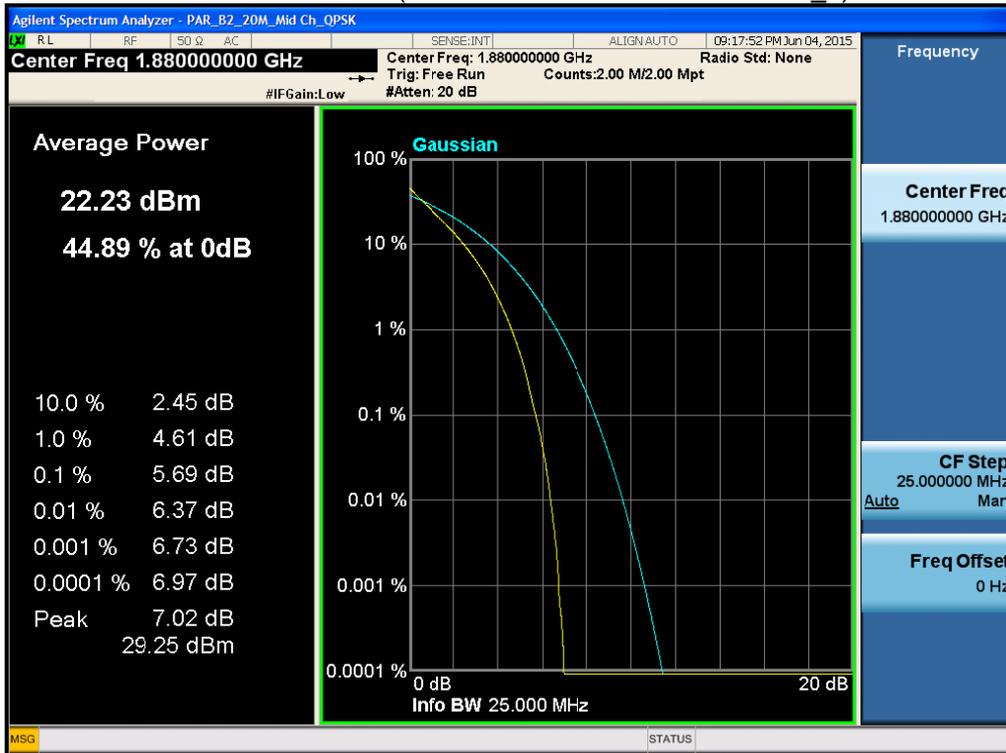


BAND 2. PAR Plot (20M BW Ch.18900 16QAM RB 100\_0)



BAND 2. Lower Band Edge Plot (1.4M BW Ch.18607 QPSK\_RB1\_Offset 0) -1

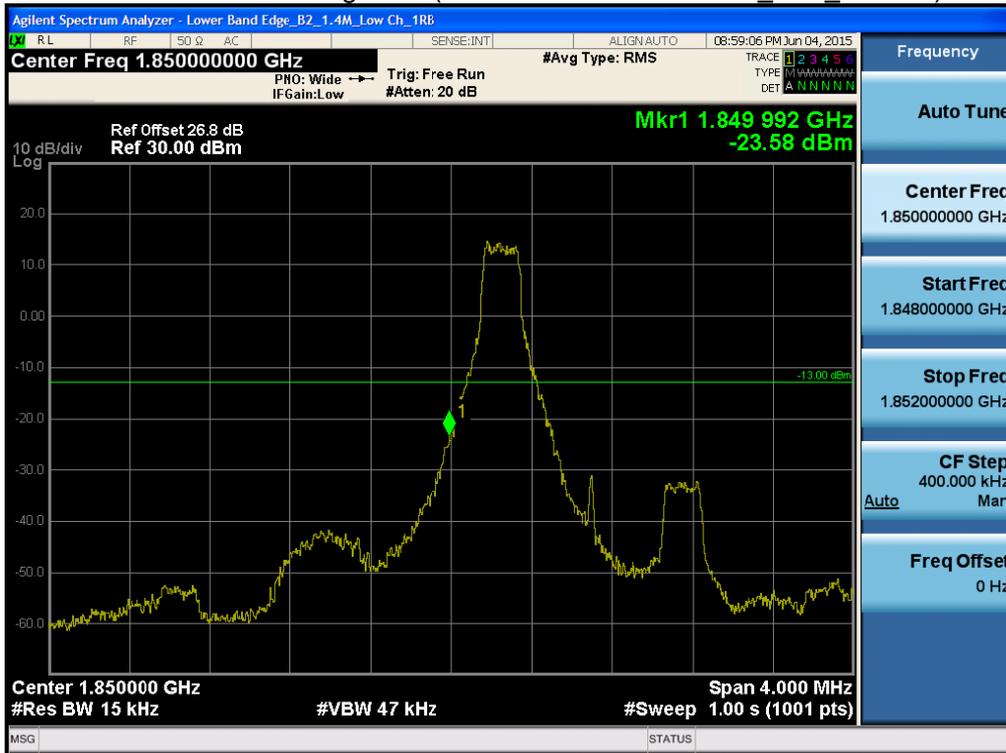


BAND 2. Lower Band Edge Plot (1.4M BW Ch.18607 QPSK\_RB6\_Offset 0) -2

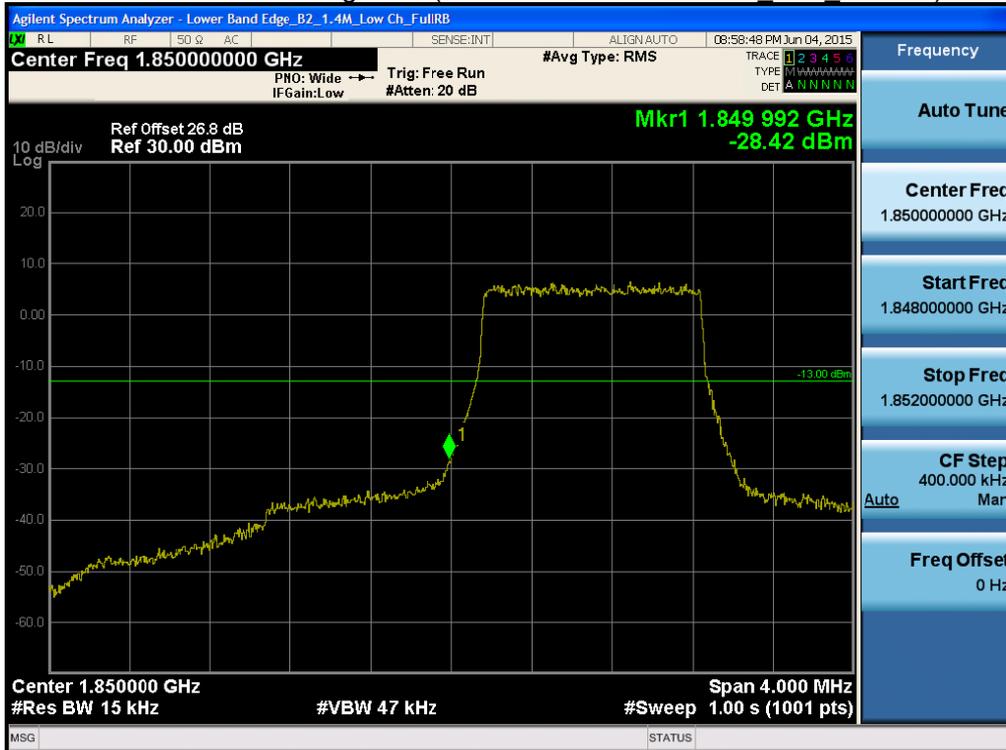

**BAND 2. Lower Extended Band Edge Plot (1.4M BW Ch.18607 QPSK\_RB6\_0) -3**




**BAND 2. Lower Band Edge Plot (3M BW Ch.18615 QPSK\_RB1\_Offset 0) -1**

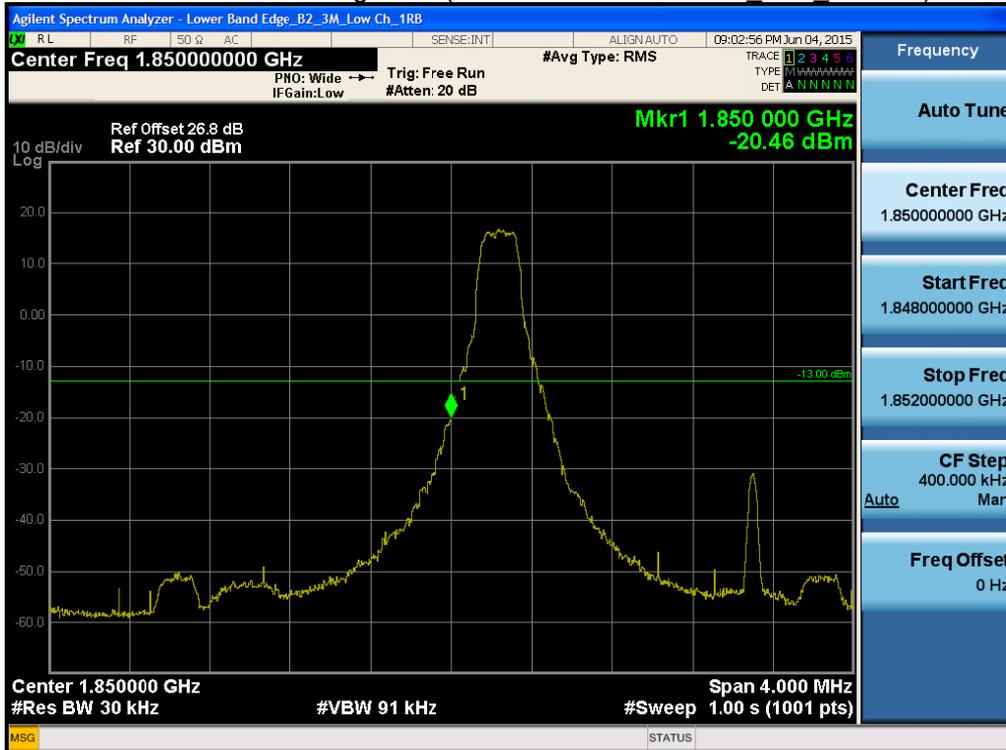


**BAND 2. Lower Band Edge Plot (3M BW Ch.18615 QPSK\_RB15\_Offset 0) -2**




**BAND 2. Lower Extended Band Edge Plot (3M BW Ch.18615 QPSK\_RB15\_0) -3**

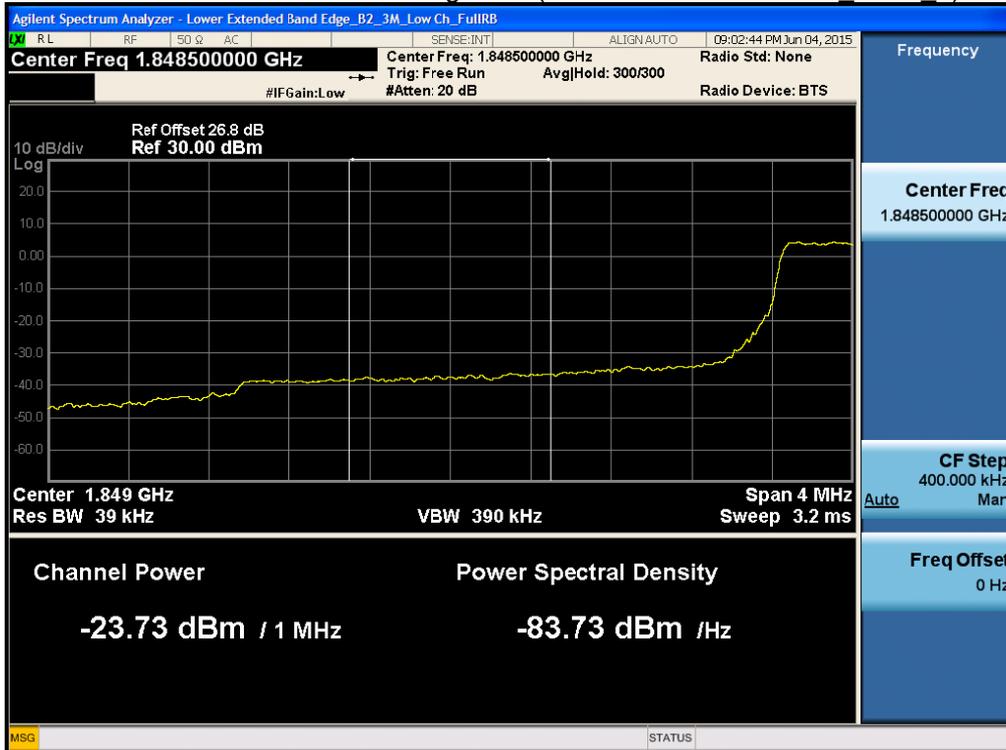

BAND 2. Lower Band Edge Plot (15M BW Ch.18675 QPSK\_RB75\_Offset 0) -1

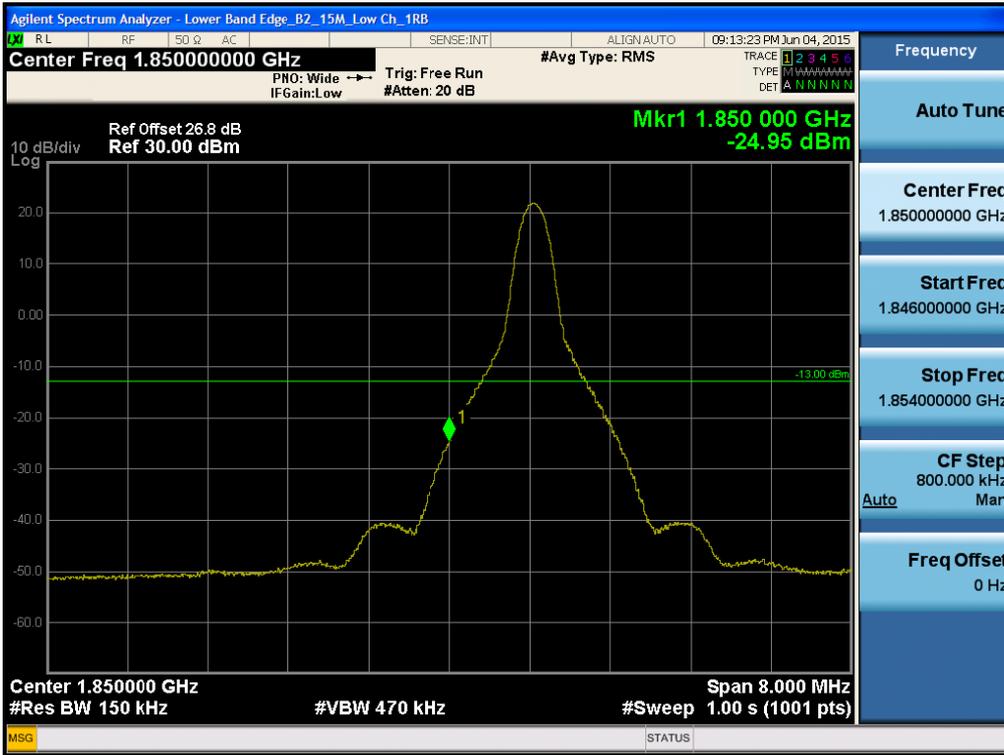


BAND 2. Lower Band Edge Plot (15M BW Ch.18675 QPSK\_RB75\_Offset 0) -2

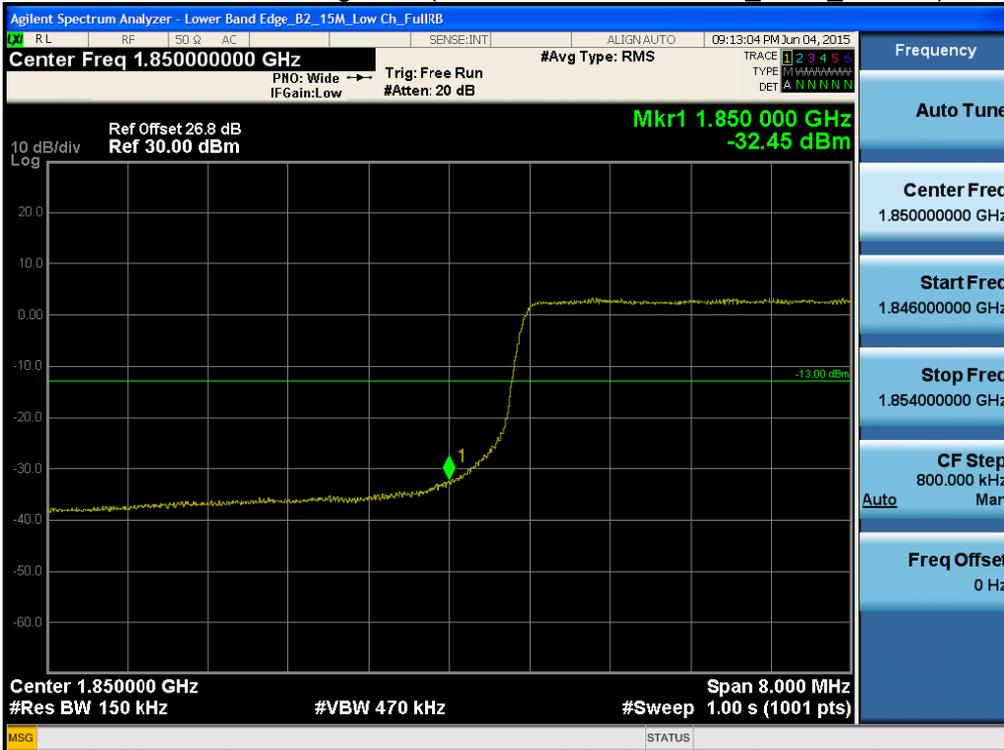

**BAND 2. Lower Extended Band Edge Plot (15M BW Ch.18675 QPSK\_RB75\_0) -3**




**BAND 2. Lower Band Edge Plot (20M BW Ch.18700 QPSK\_RB1\_Offset 0) -1**

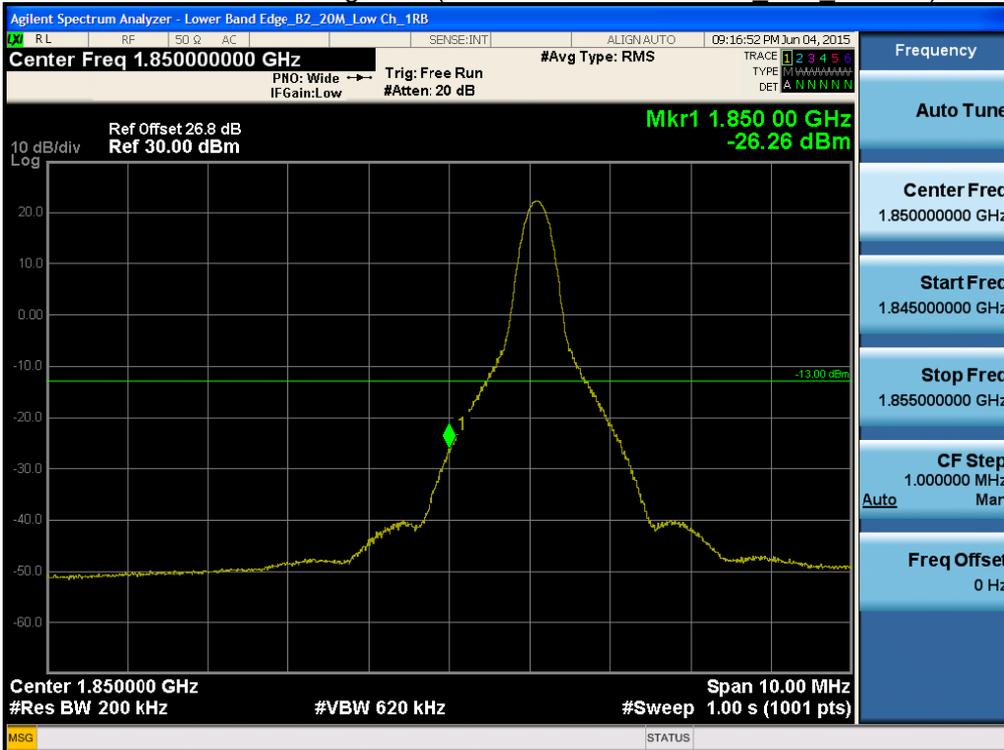

BAND 2. Lower Band Edge Plot (20M BW Ch.18700 QPSK\_RB100\_Offset 0) -2



BAND 2. Lower Extended Band Edge Plot (20M BW Ch.18700 QPSK\_RB100\_0) -3

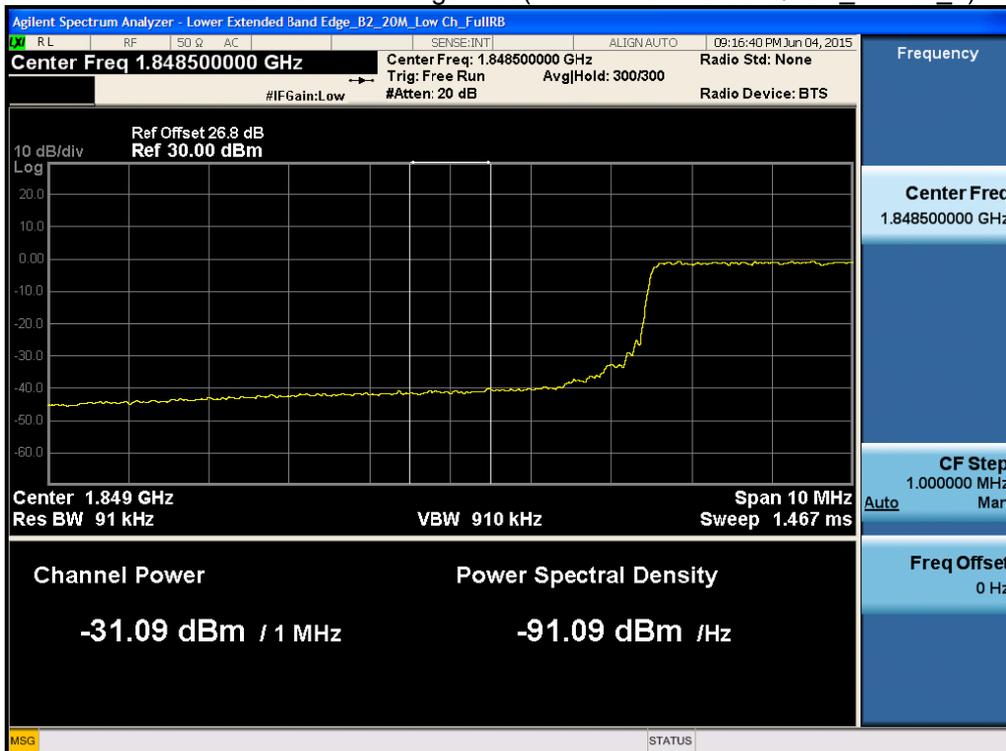

BAND 2. Upper Band Edge Plot (1.4M BW Ch.19193 QPSK\_RB1\_Offset 5) -1




BAND 2. Upper Band Edge Plot (1.4M BW Ch.19193 QPSK\_RB6\_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (1.4M BW Ch.19193 QPSK\_RB6\_0) -3



BAND 2. Upper Band Edge Plot (3M BW Ch.19185 QPSK\_RB1\_Offset 14) -1

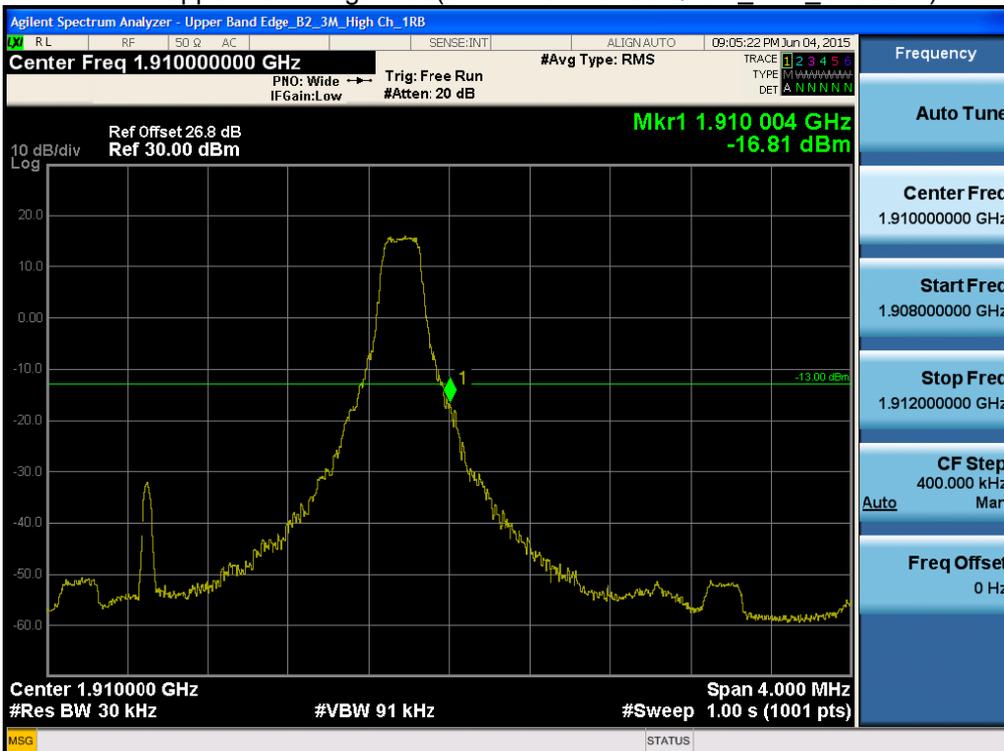

BAND 2. Upper Band Edge Plot (3M BW Ch.19185 QPSK\_RB15\_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (3M BW Ch.19185 QPSK\_RB15 0) -3



BAND 2. Upper Band Edge Plot (15M BW Ch.19125 QPSK\_RB1\_Offset 74) -1




BAND 2. Upper Band Edge Plot (15M BW Ch.19125 QPSK\_RB75\_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (15M BW Ch.19125 QPSK\_RB75\_0) -3



BAND 2. Upper Band Edge Plot (20M BW Ch.19100 QPSK\_RB1\_Offset 99) -1

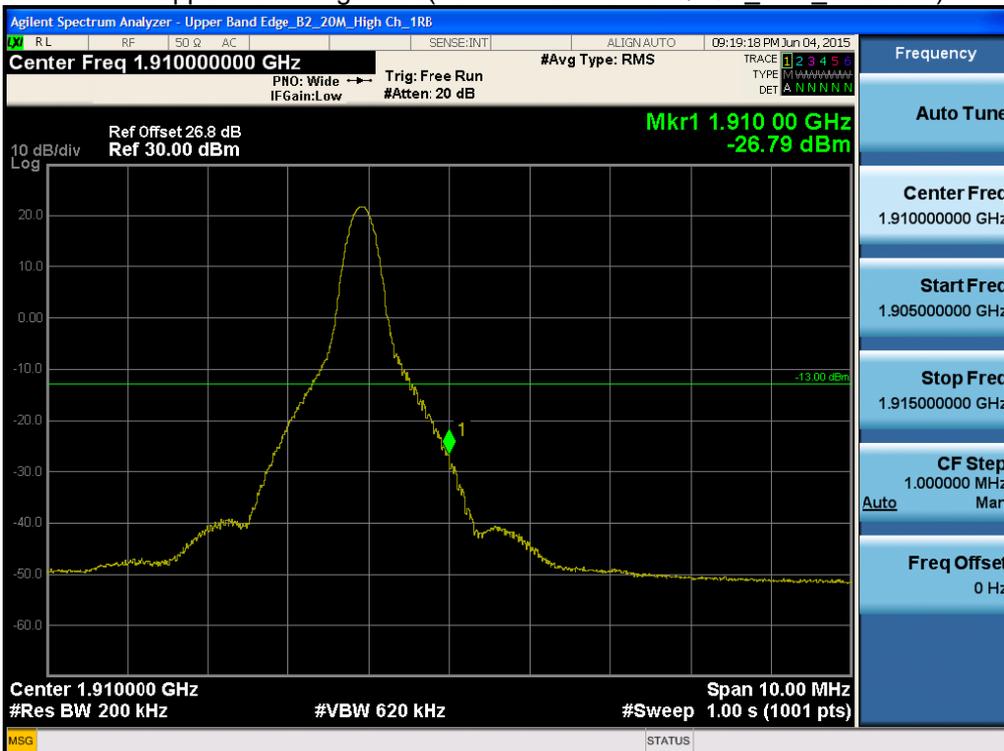


BAND 2. Upper Band Edge Plot (20M BW Ch.19100 QPSK\_RB100\_Offset 0) -2




BAND 2. Upper Extended Band Edge Plot (20M BW Ch.19100 QPSK\_RB100\_0) -3



BAND 5. Lower Band Edge Plot (1.4M BW Ch.20407 QPSK\_RB1\_Offset 0)

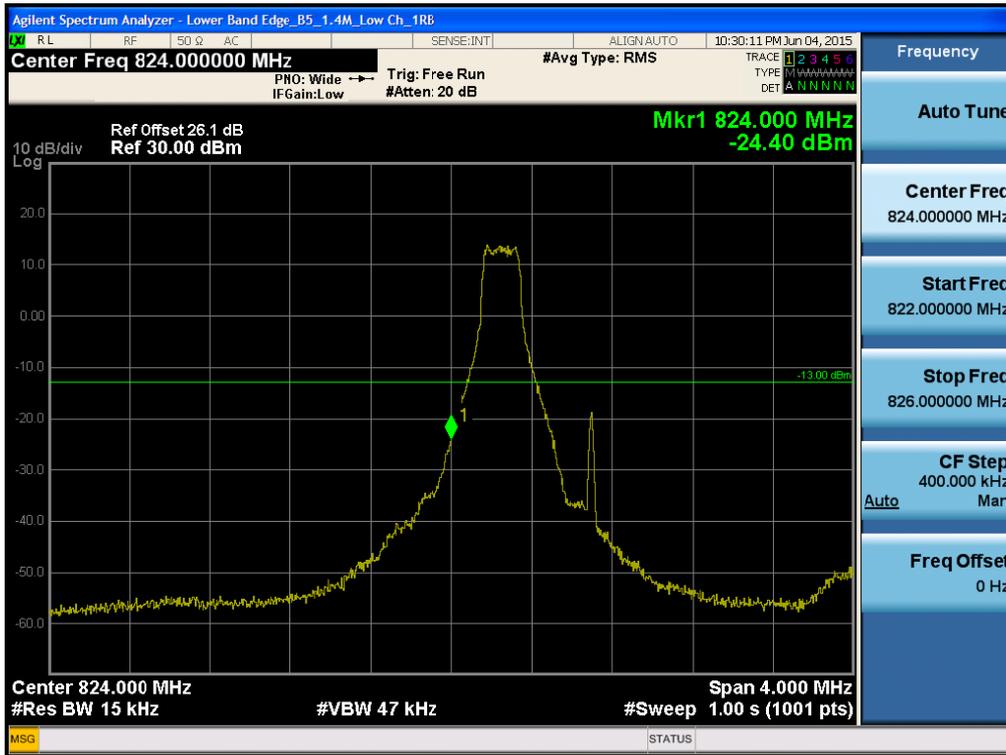


BAND 5. Lower Band Edge Plot (1.4M BW Ch.20407 QPSK\_RB6\_Offset 0)

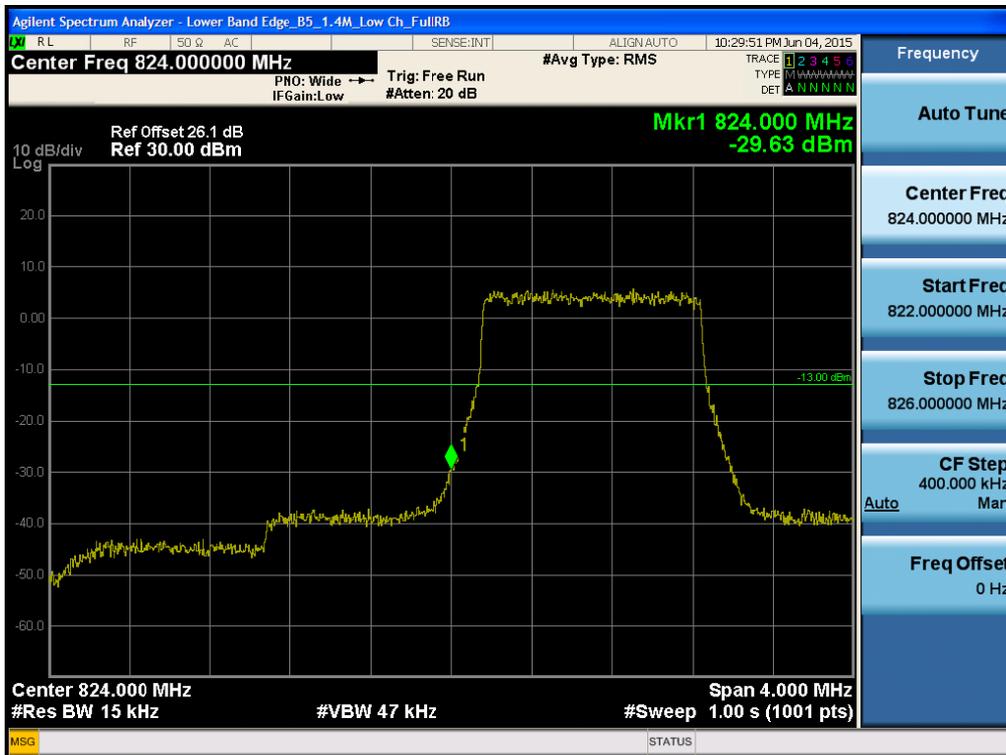


BAND 5. Lower Extended Band Edge Plot (1.4M BW Ch.20407 QPSK\_RB6\_0)



BAND 5. Lower Band Edge Plot (3M BW Ch.20415 QPSK\_RB1\_Offset 0)

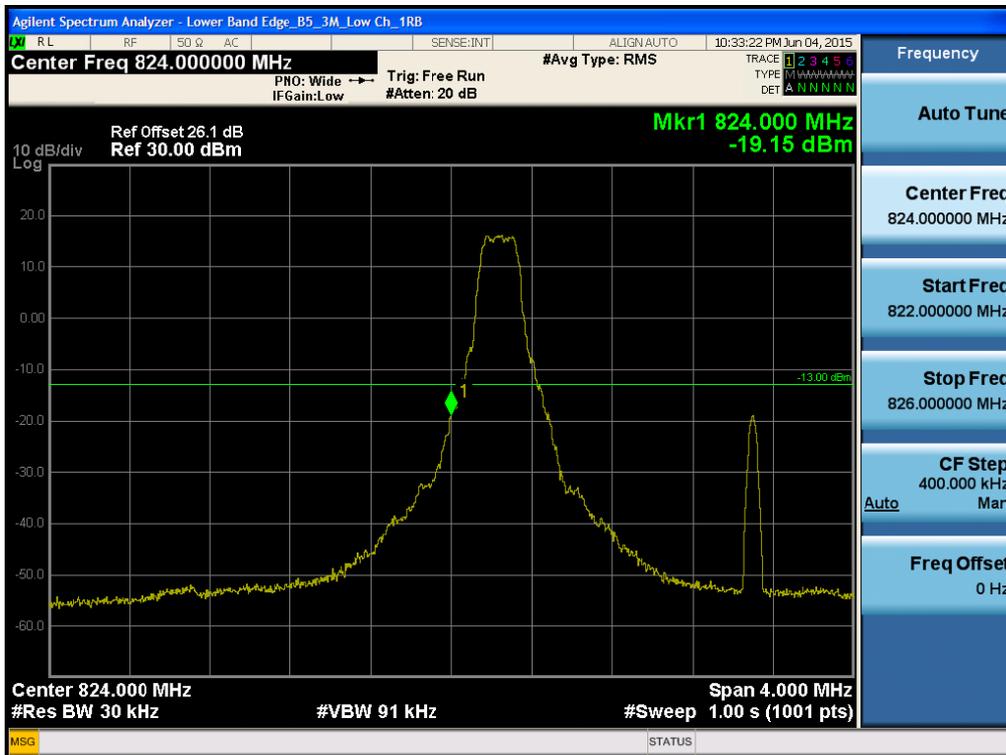


BAND 5. Lower Band Edge Plot (3M BW Ch.20415 QPSK\_RB15\_Offset 0)

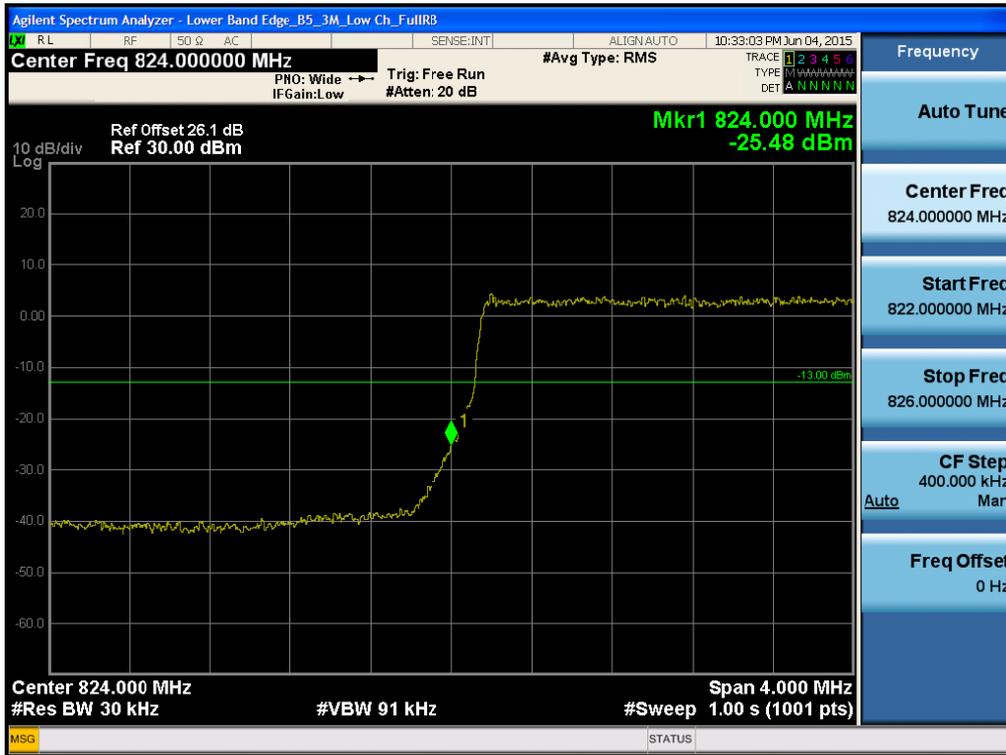


BAND 5. Lower Extended Band Edge Plot (3M BW Ch.20415 QPSK\_RB15\_0)



BAND 5. Upper Band Edge Plot (1.4M BW Ch.20643 QPSK\_RB1\_Offset 5)

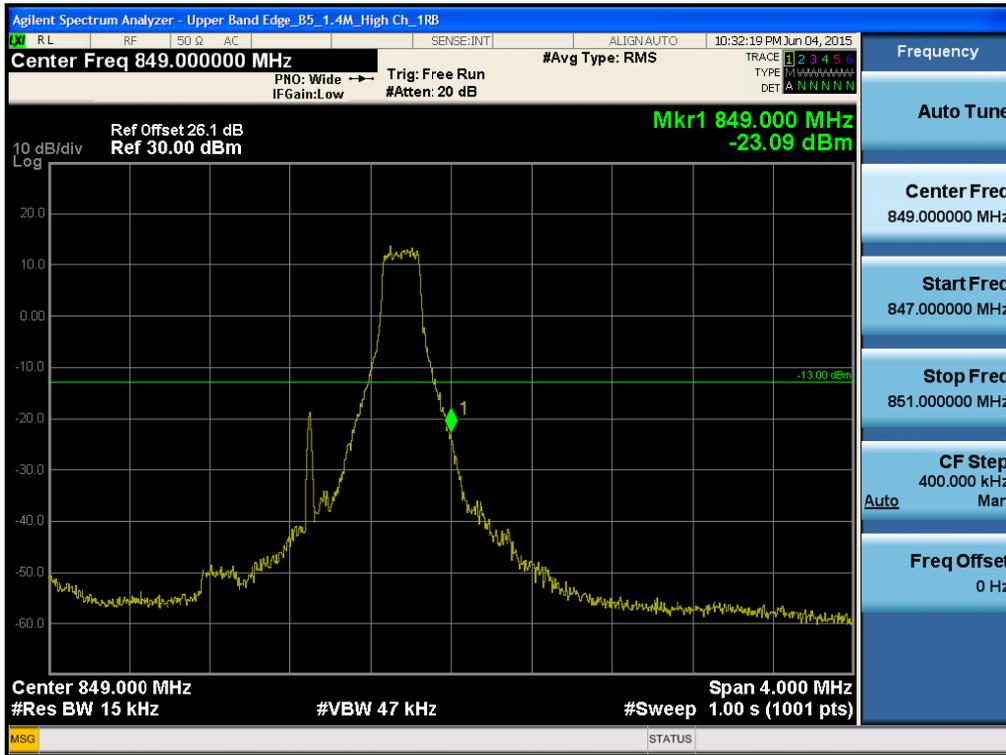


BAND 5. Upper Band Edge Plot (1.4M BW Ch.20643 QPSK\_RB6\_Offset 0)

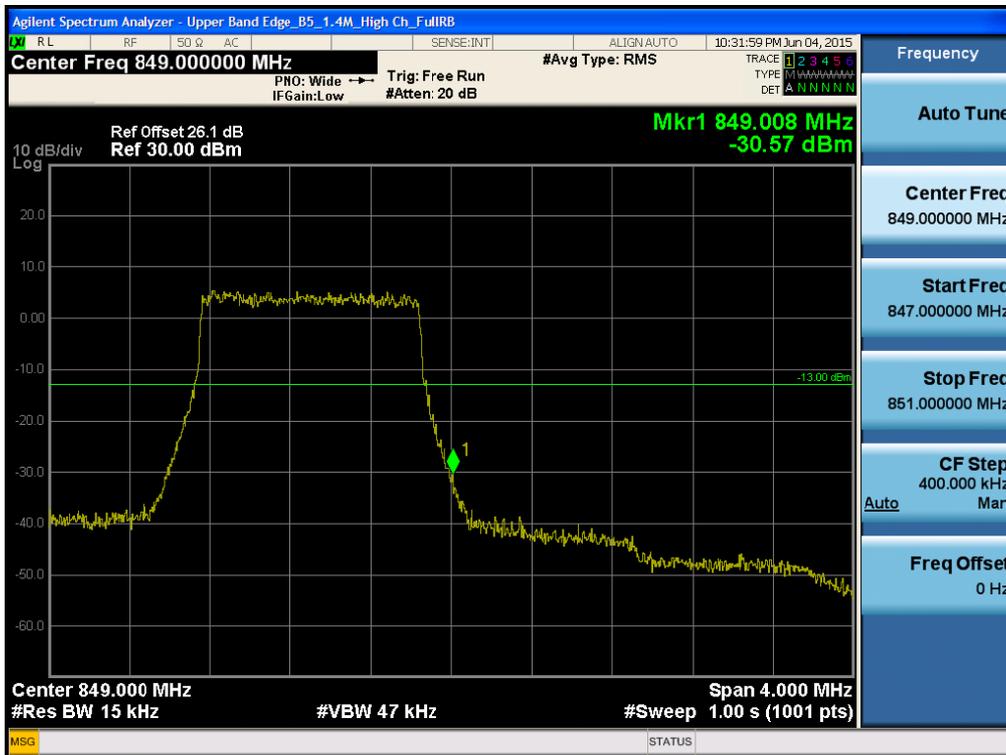

BAND 5. Upper Extended Band Edge Plot (1.4M BW Ch.20643 QPSK\_RB6\_0)




BAND 5. Upper Band Edge Plot (3M BW Ch.20635 QPSK\_RB1\_Offset 14)

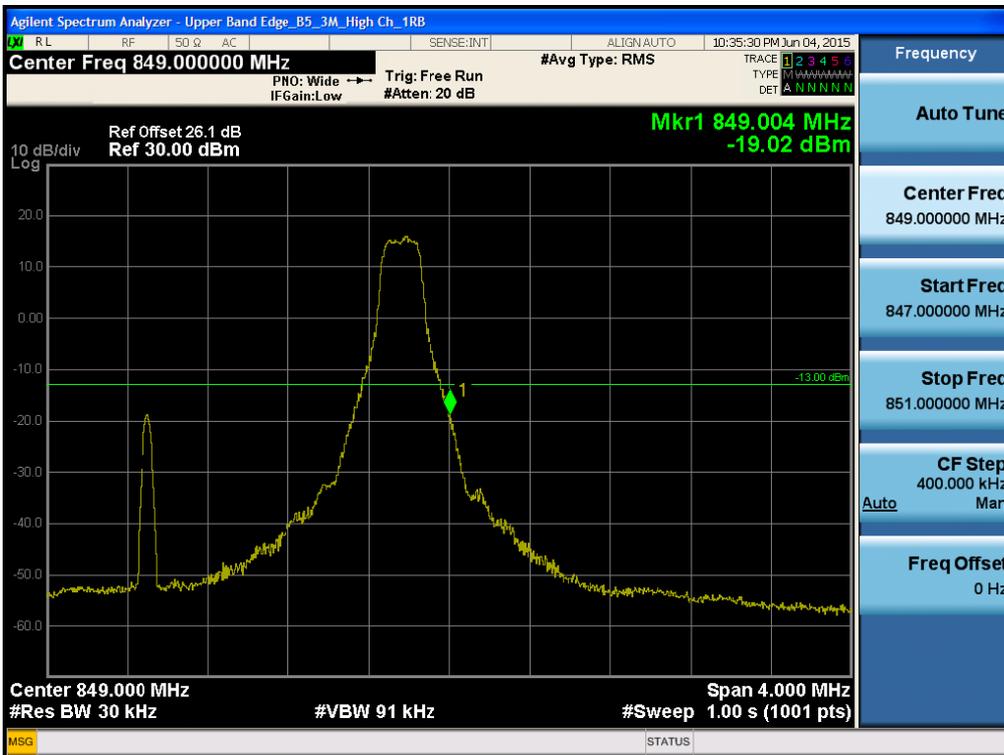


BAND 5. Upper Band Edge Plot (3M BW Ch.20635 QPSK\_RB15\_Offset 0)




BAND 5. Upper Extended Band Edge Plot (3M BW Ch.20635 QPSK\_RB15\_0)

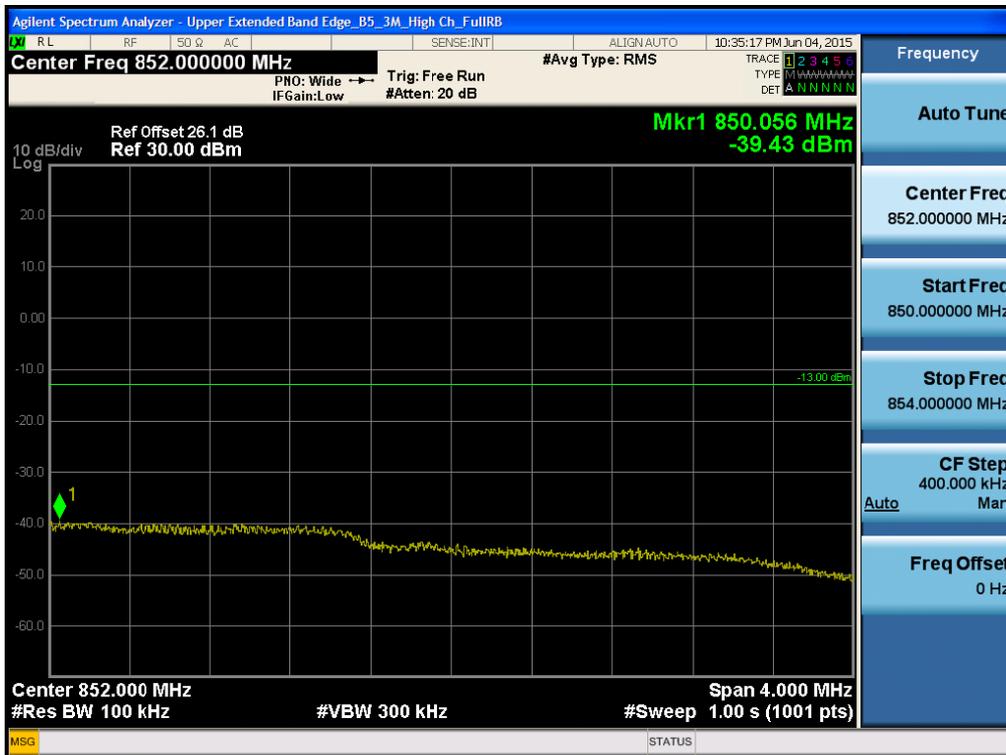


BAND 2. Conducted Spurious Emission Plot\_1 (18607ch\_1.4MHz\_QPSK\_RB 1\_0)

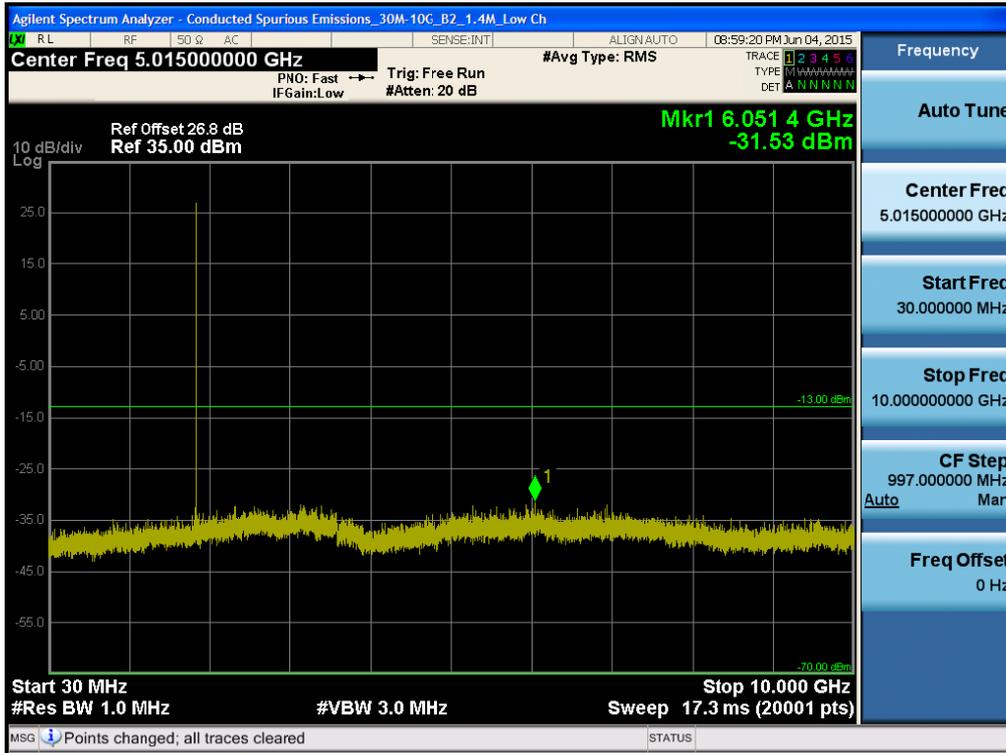


BAND 2. Conducted Spurious Emission Plot\_2 (18607ch\_1.4MHz\_QPSK\_RB 1\_0)

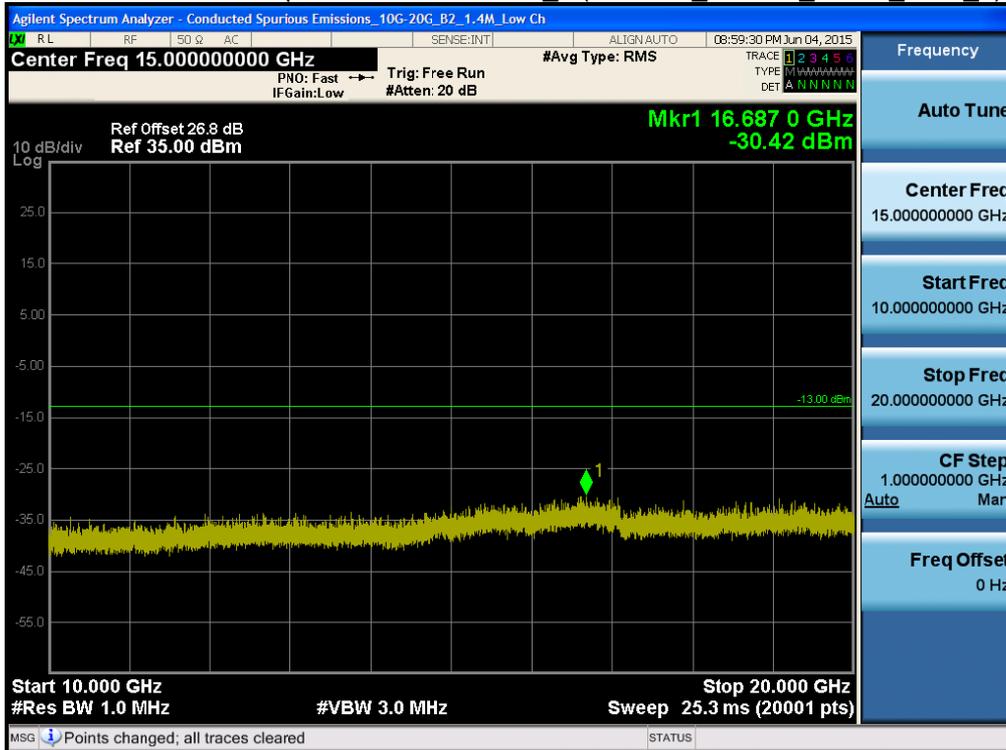


BAND 2. Conducted Spurious Emission Plot\_1 (18900ch\_1.4MHz\_QPSK\_RB 1\_0)

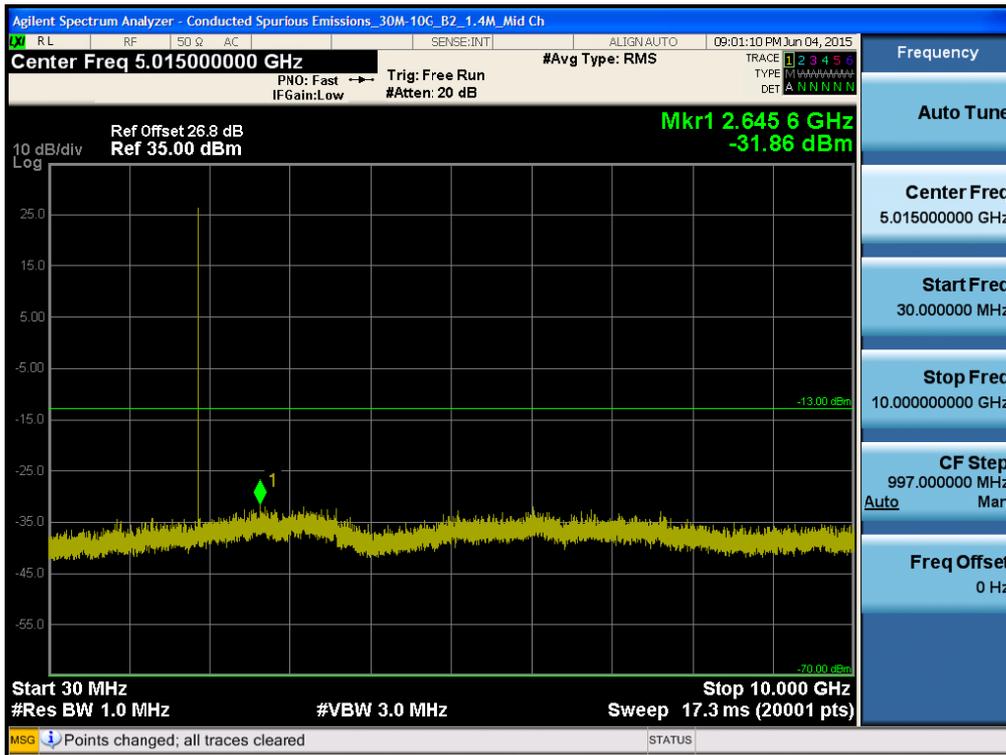


BAND 2. Conducted Spurious Emission Plot\_2 (18900ch\_1.4MHz\_QPSK\_RB 1\_0)

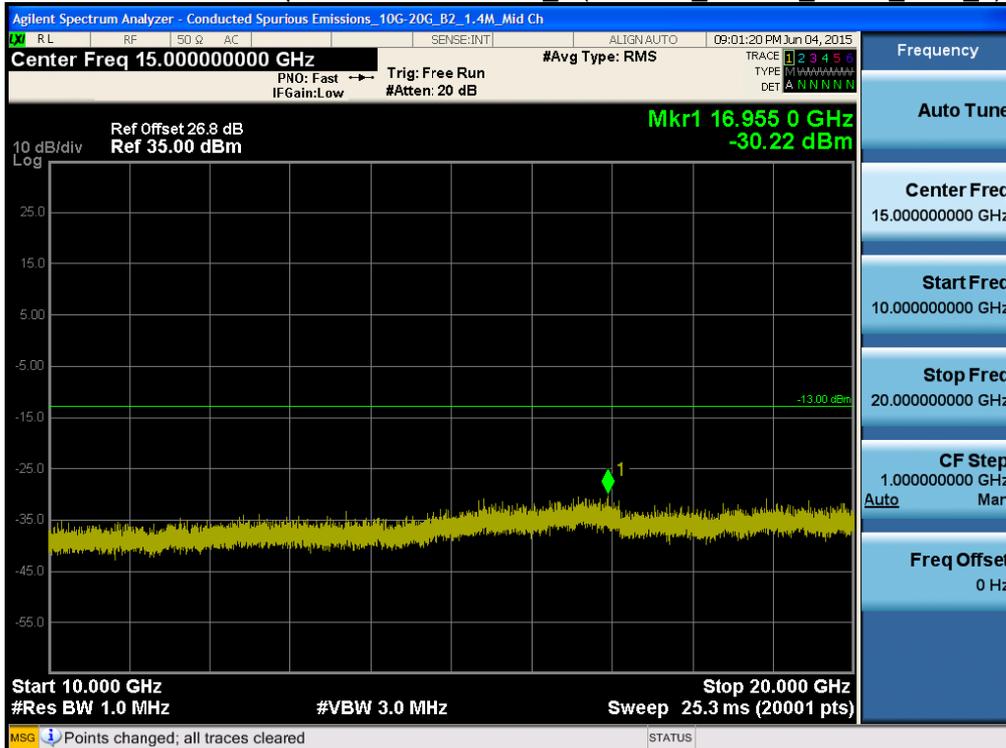


BAND 2. Conducted Spurious Emission Plot\_1 (19193ch\_1.4MHz\_QPSK\_RB 1\_0)

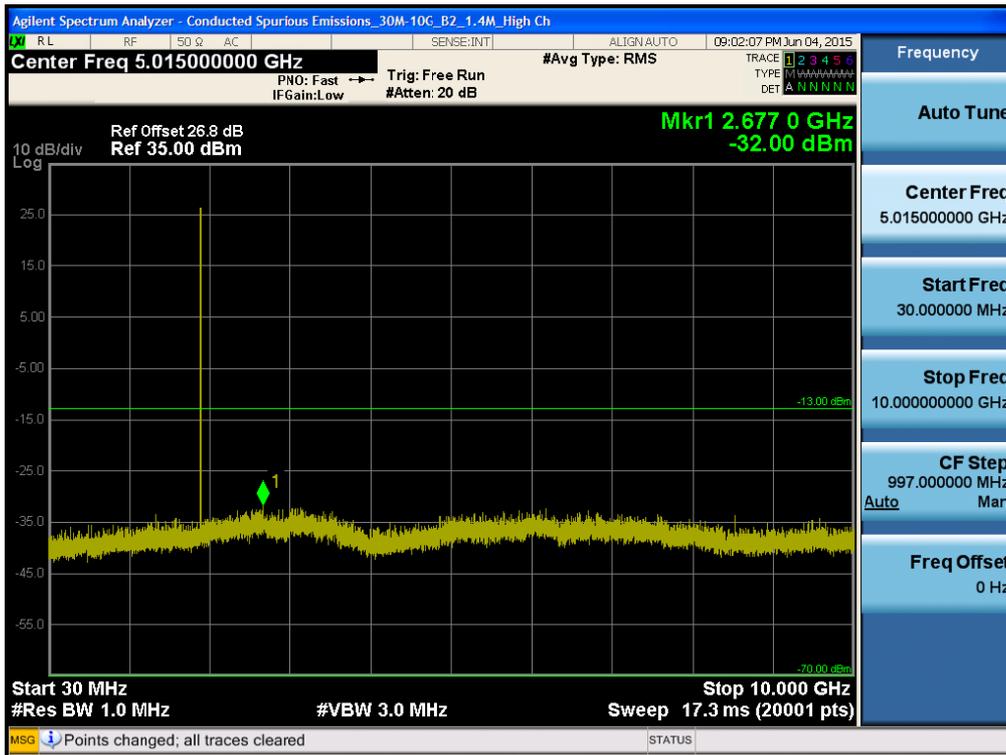


BAND 2. Conducted Spurious Emission Plot\_2 (19193ch\_1.4MHz\_QPSK\_RB 1\_0)

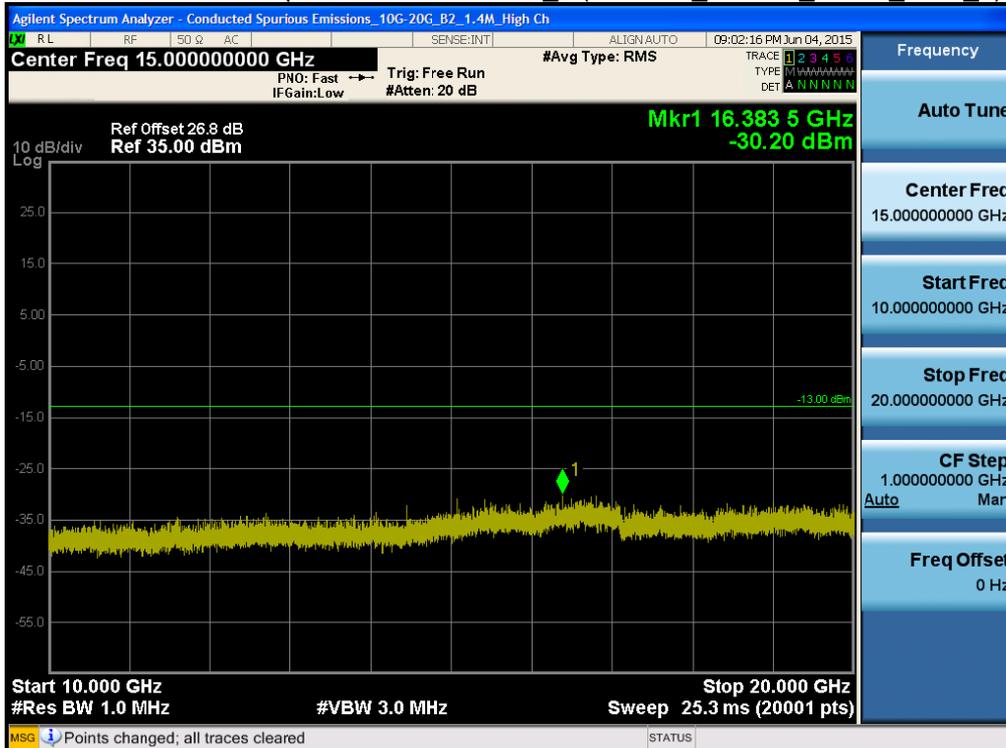


BAND 2. Conducted Spurious Emission Plot\_1 (18615ch\_3MHz\_QPSK\_RB 1\_0)

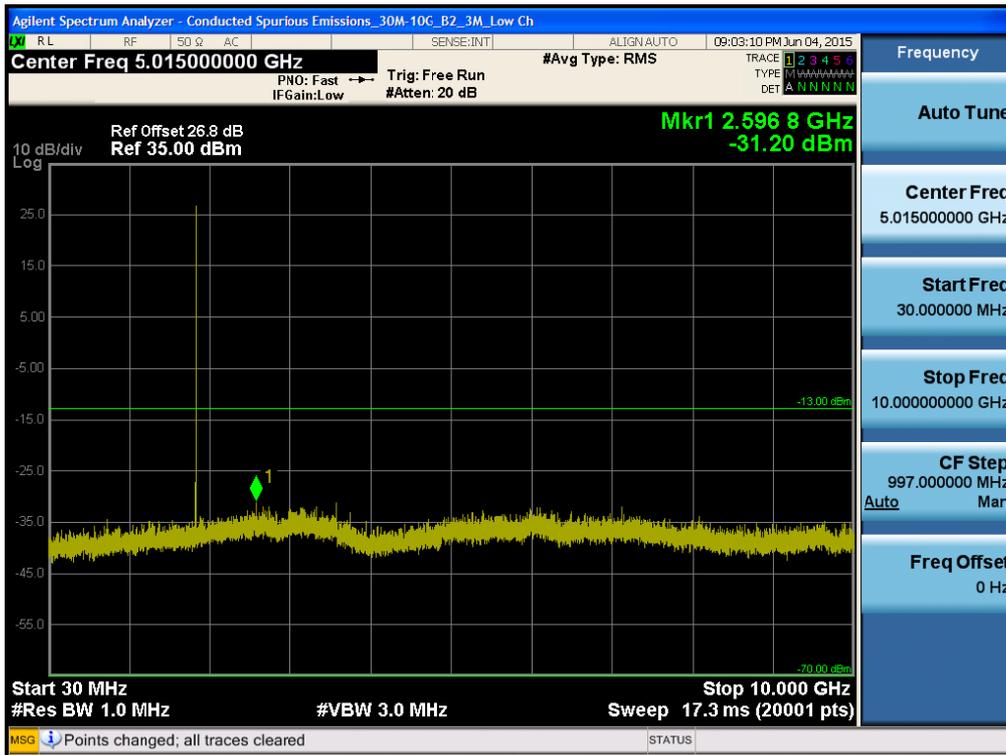


BAND 2. Conducted Spurious Emission Plot\_2 (18615ch\_3MHz\_QPSK\_RB 1\_0)

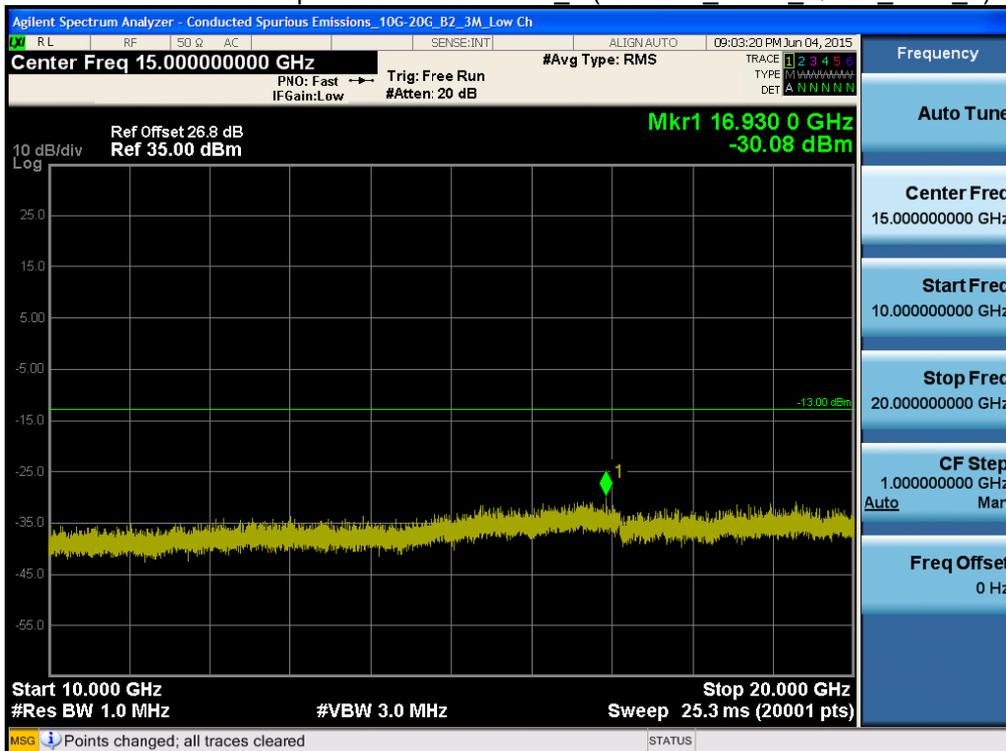


BAND 2. Conducted Spurious Emission Plot\_1 (18900ch\_3MHz\_QPSK\_RB 1\_0)

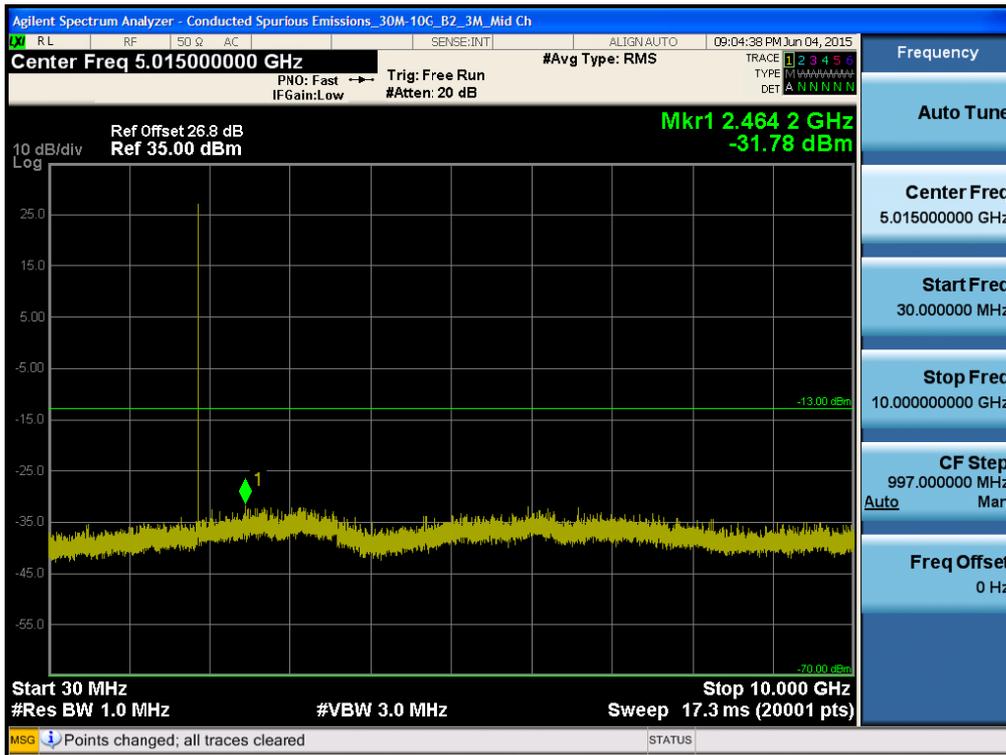


BAND 2. Conducted Spurious Emission Plot\_2 (18900ch\_3MHz\_QPSK\_RB 1\_0)

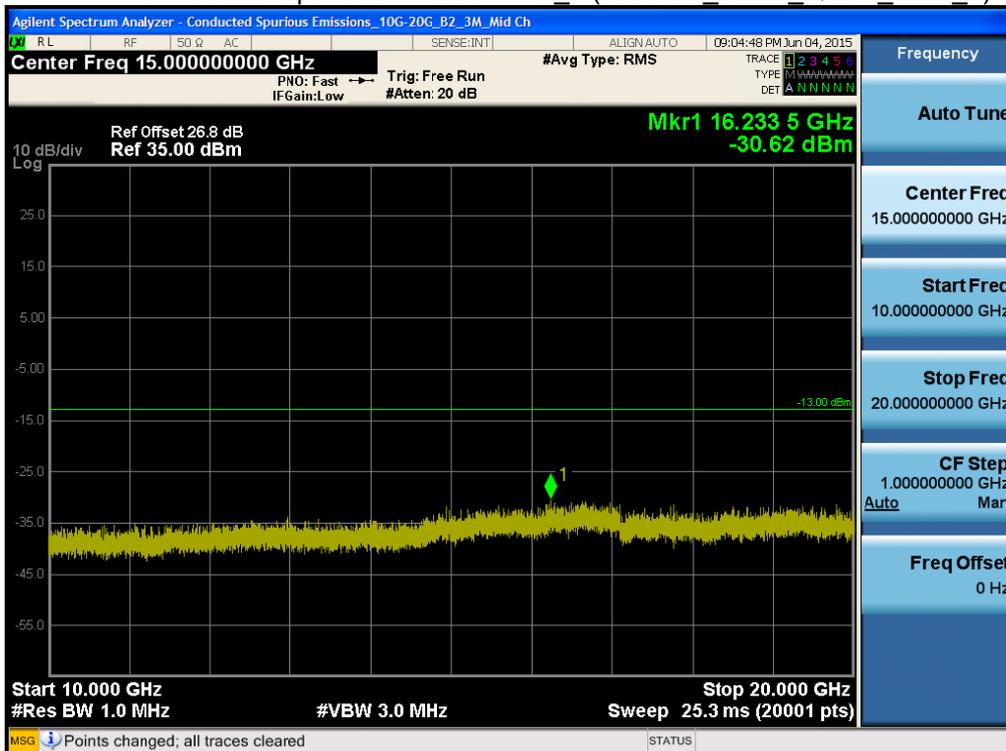


BAND 2. Conducted Spurious Emission Plot\_1 (19185ch\_3MHz\_QPSK\_RB 1\_0)

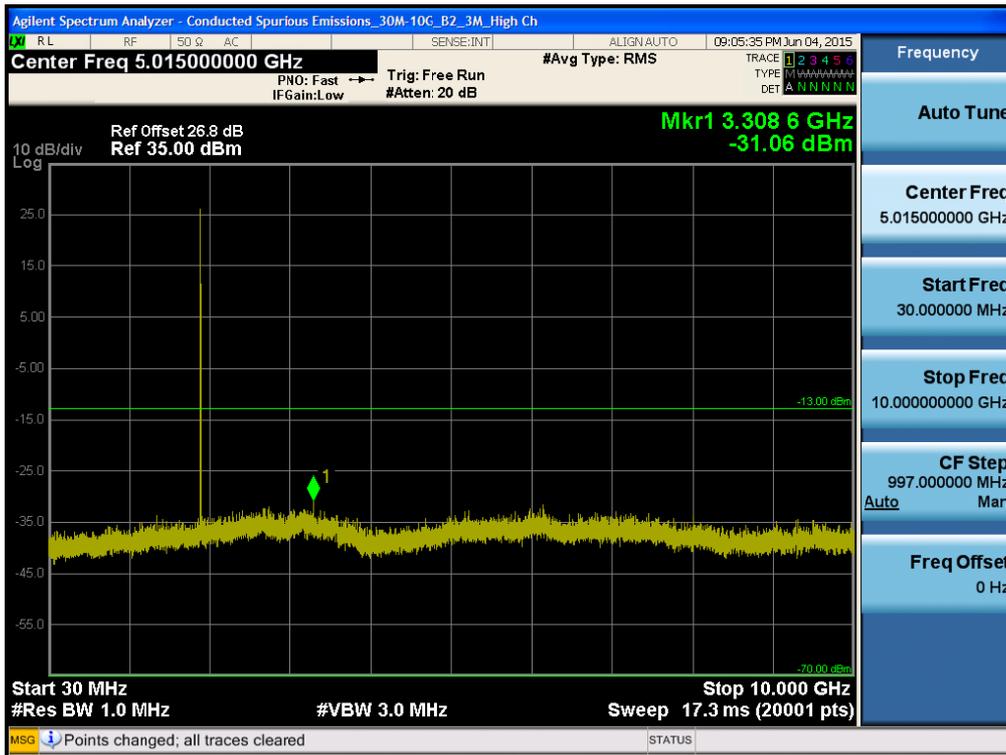


BAND 2. Conducted Spurious Emission Plot\_2 (19185ch\_3MHz\_QPSK\_RB 1\_0)

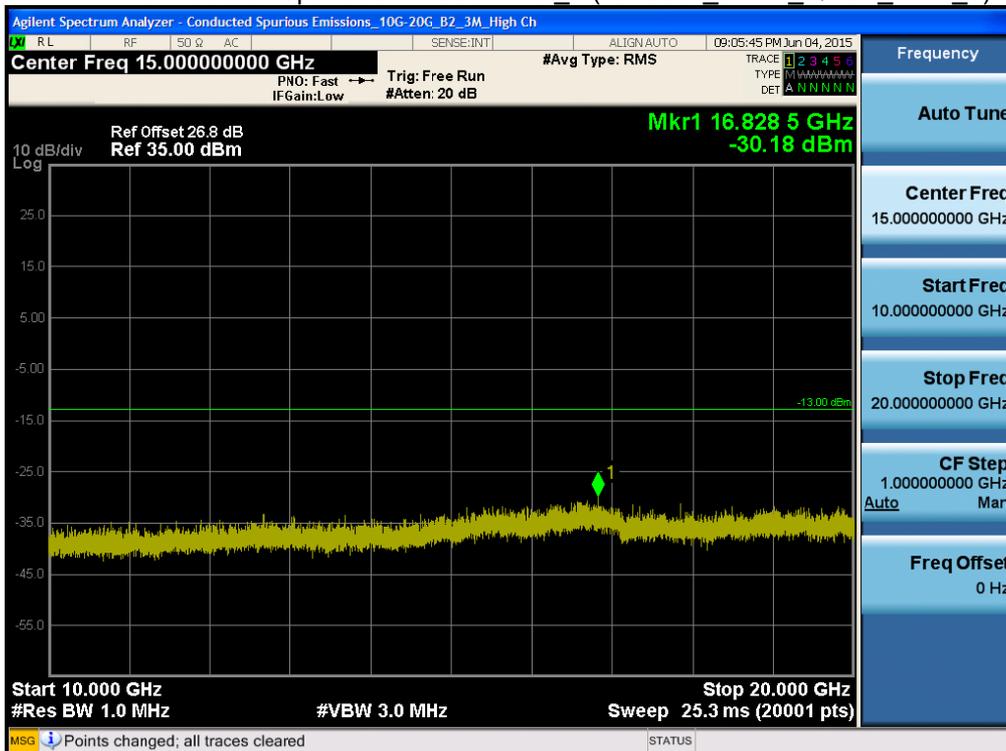


BAND 2. Conducted Spurious Emission Plot\_1 (18675ch\_15MHz\_QPSK\_RB 1\_0)

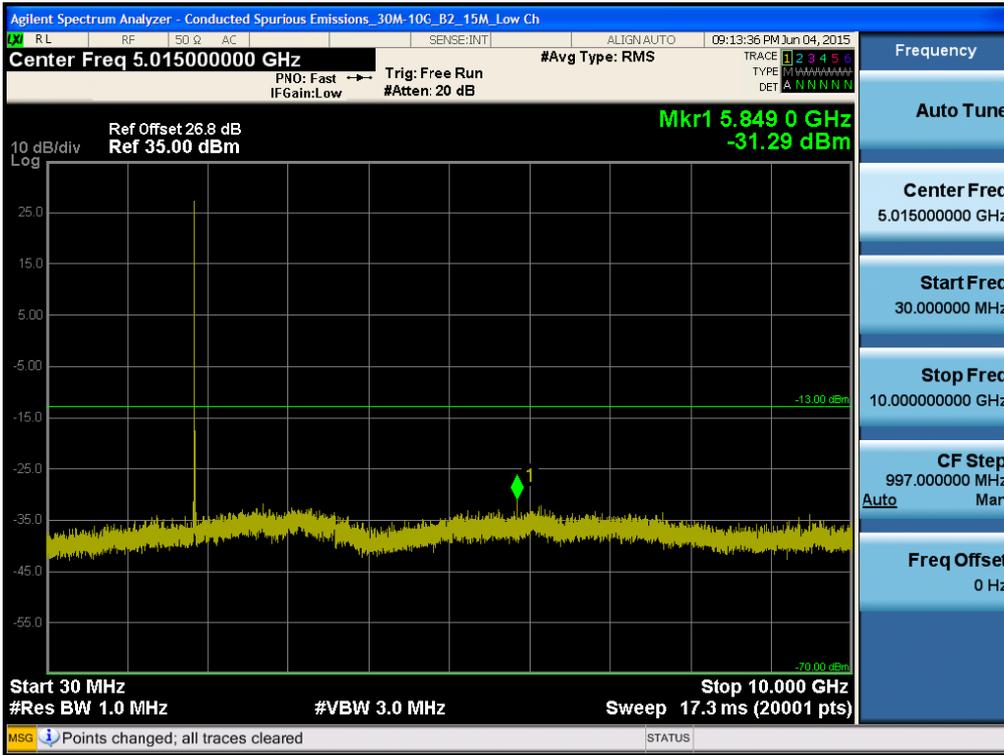


BAND 2. Conducted Spurious Emission Plot\_2 (18675ch\_15MHz\_QPSK\_RB 1\_0)

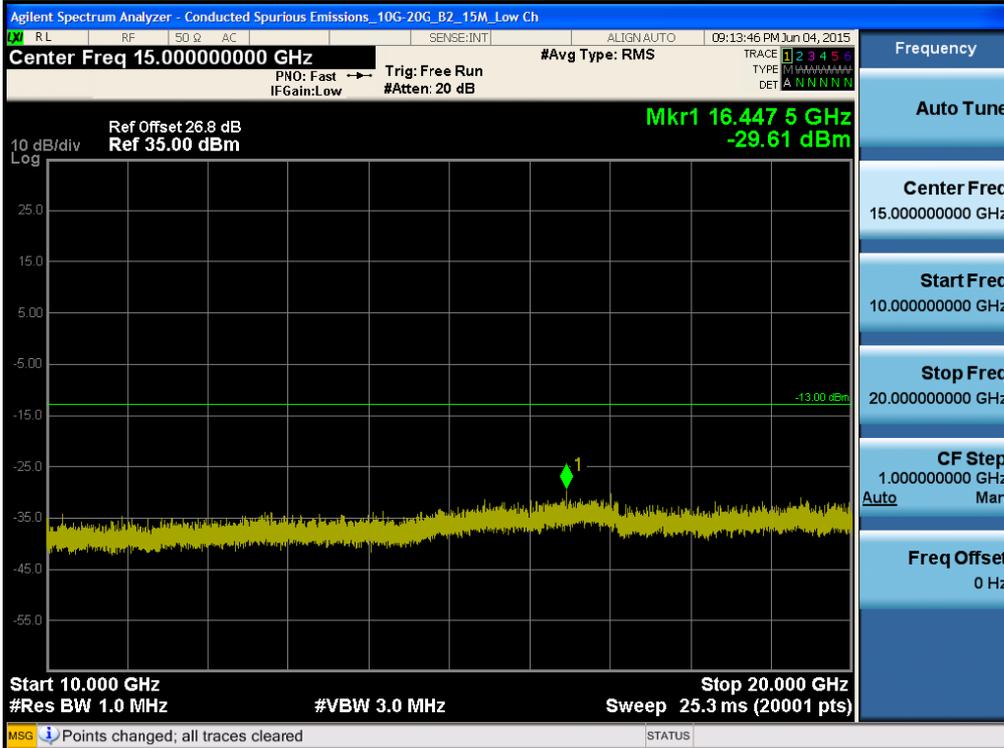


BAND 2. Conducted Spurious Emission Plot\_1 (18900ch\_15MHz\_QPSK\_RB 1\_0)

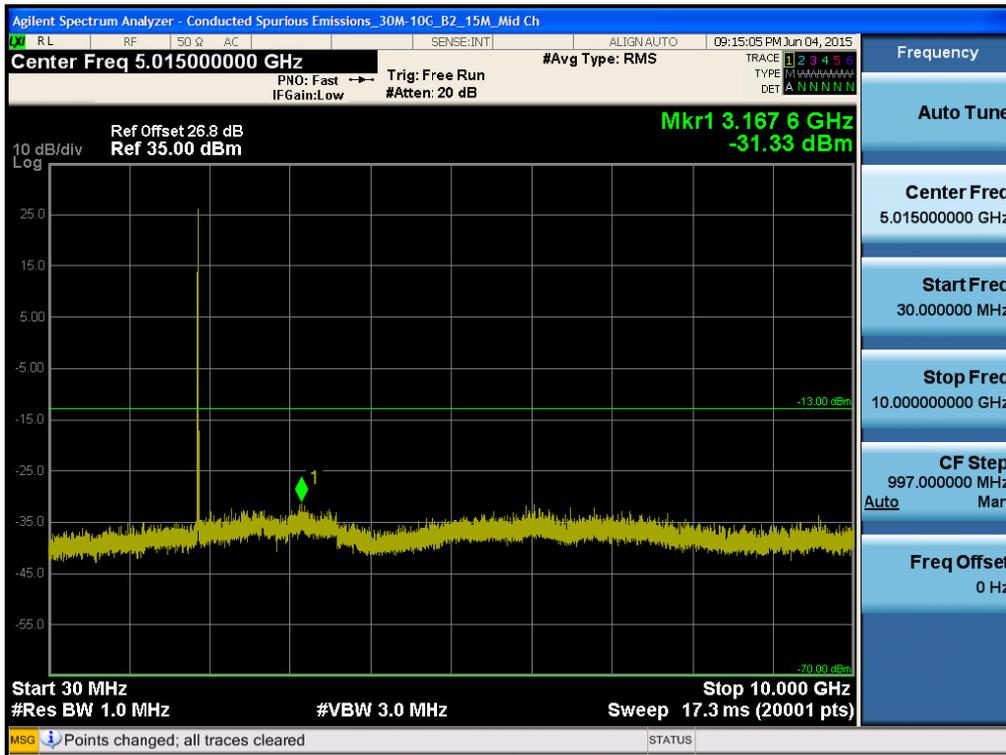


BAND 2. Conducted Spurious Emission Plot\_2 (18900ch\_15MHz\_QPSK\_RB 1\_0)

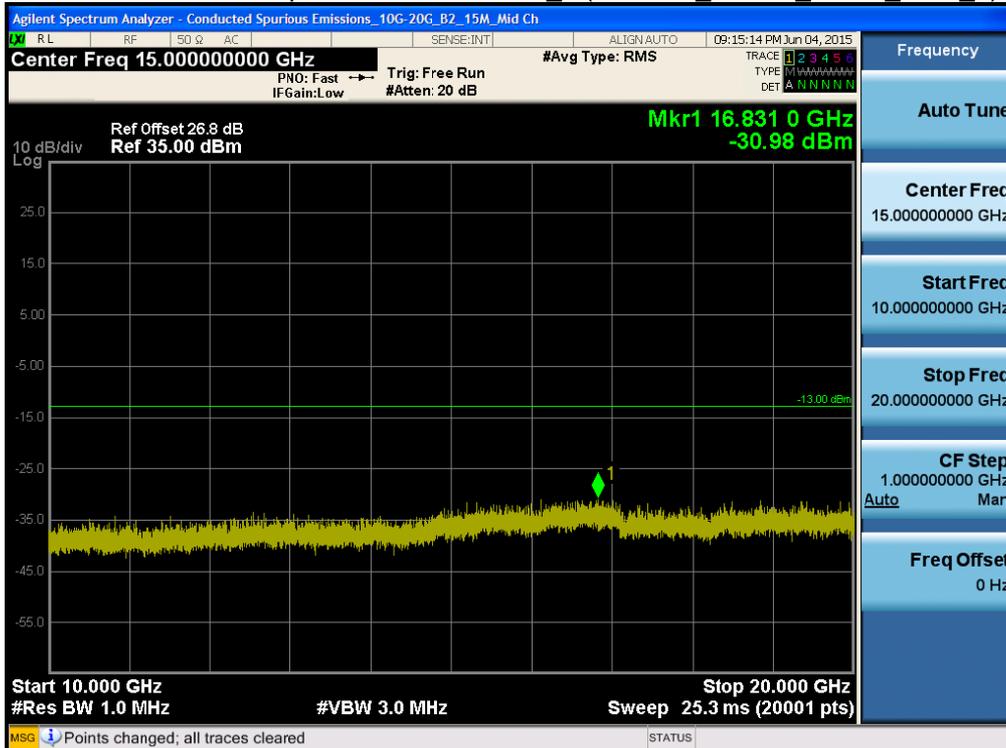


BAND 2. Conducted Spurious Emission Plot\_1 (19125ch\_15MHz\_QPSK\_RB 1\_0)

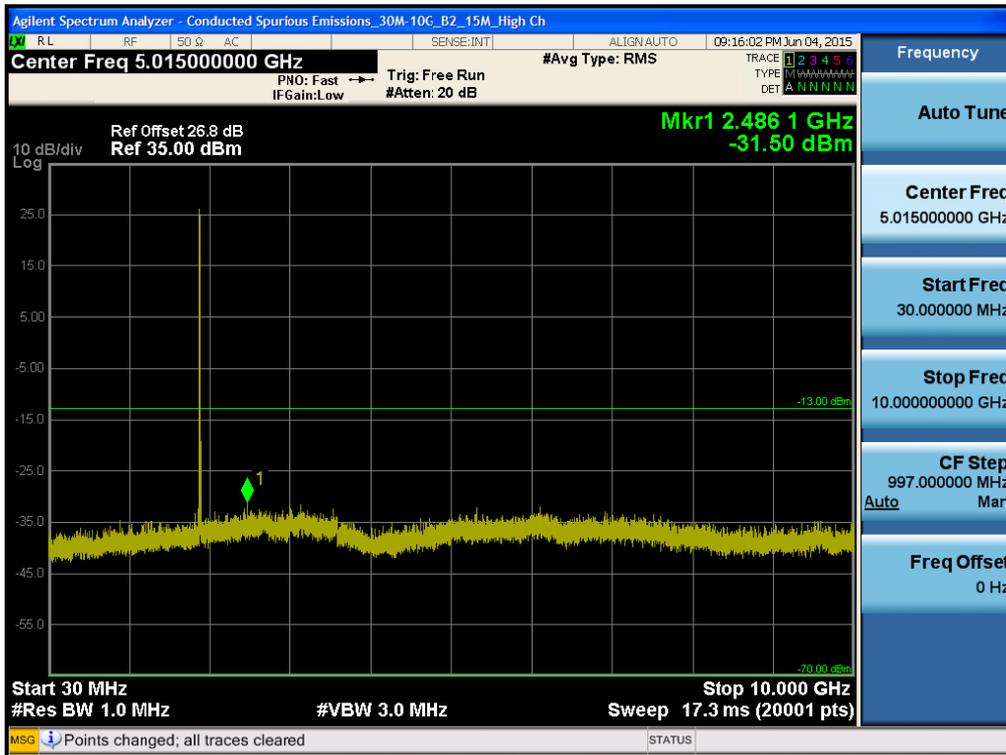


BAND 2. Conducted Spurious Emission Plot\_2 (19125ch\_15MHz\_QPSK\_RB 1\_0)

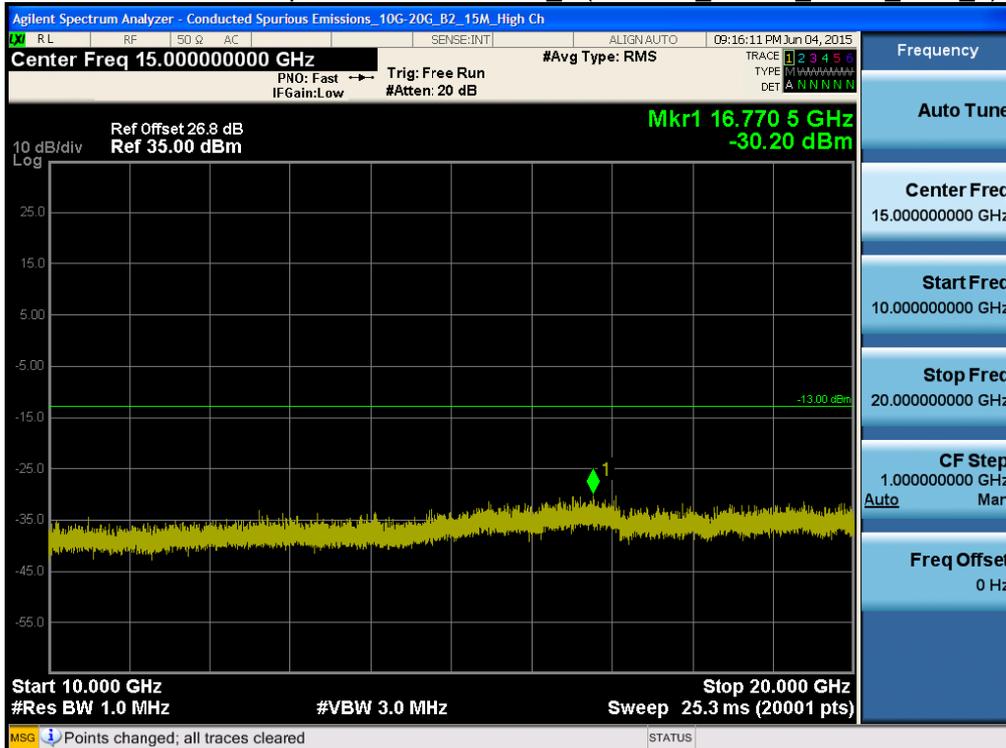


BAND 2. Conducted Spurious Emission Plot\_1 (18700ch\_20MHz\_QPSK\_RB 1\_0)

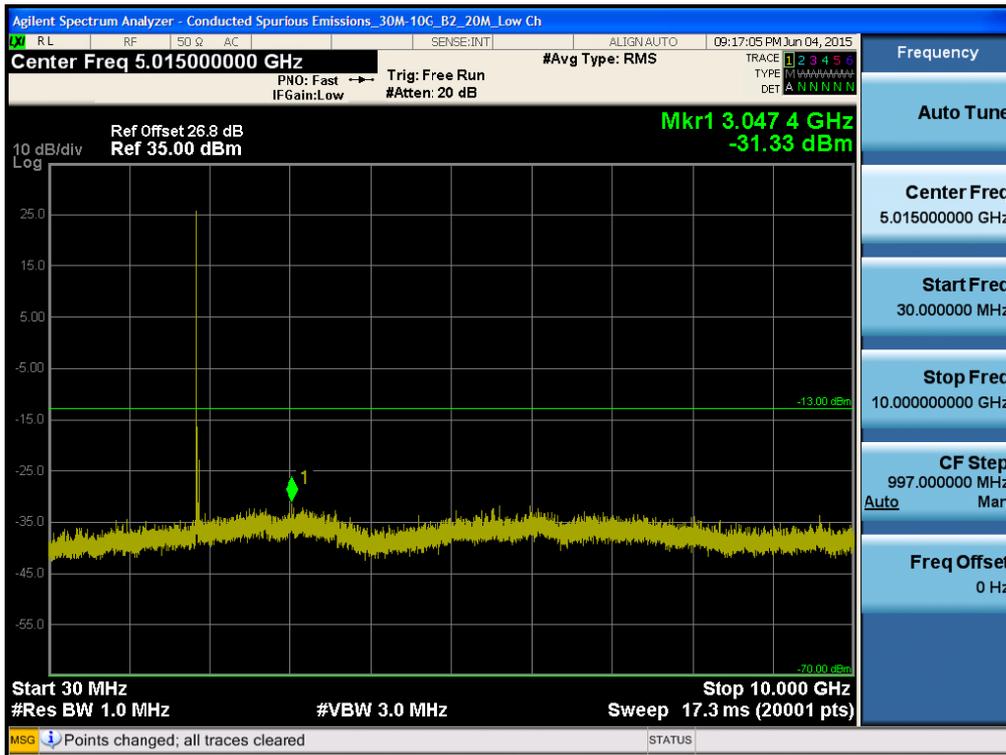


BAND 2. Conducted Spurious Emission Plot\_2 (18700ch\_20MHz\_QPSK\_RB 1\_0)

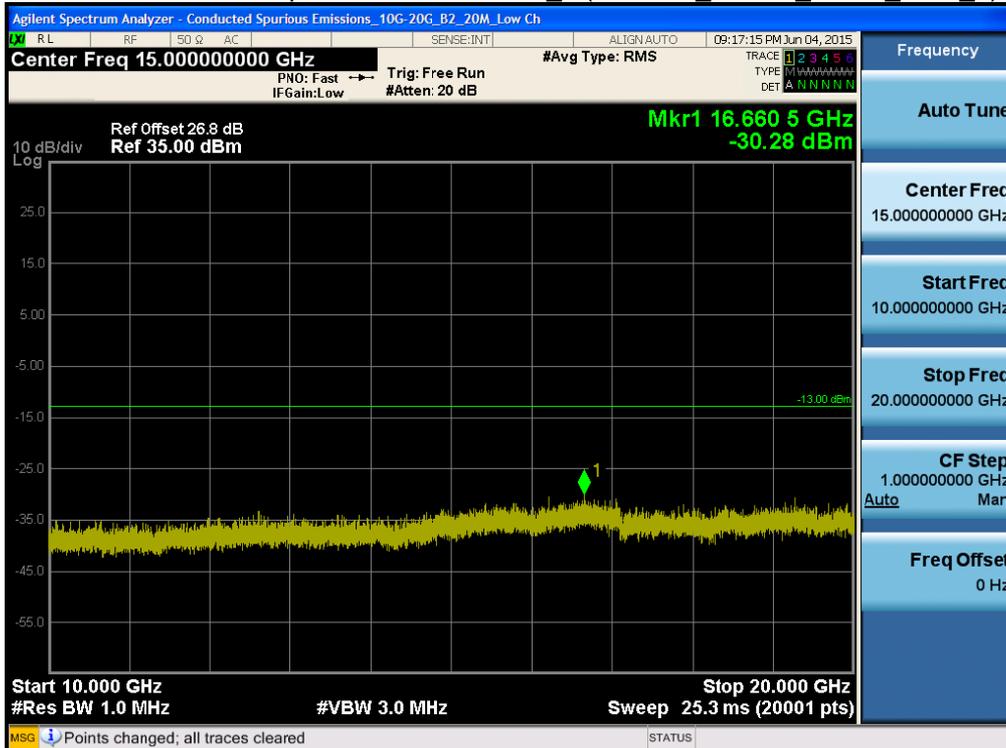


BAND 2. Conducted Spurious Emission Plot\_1 (18900ch\_20MHz\_QPSK\_RB 1\_0)

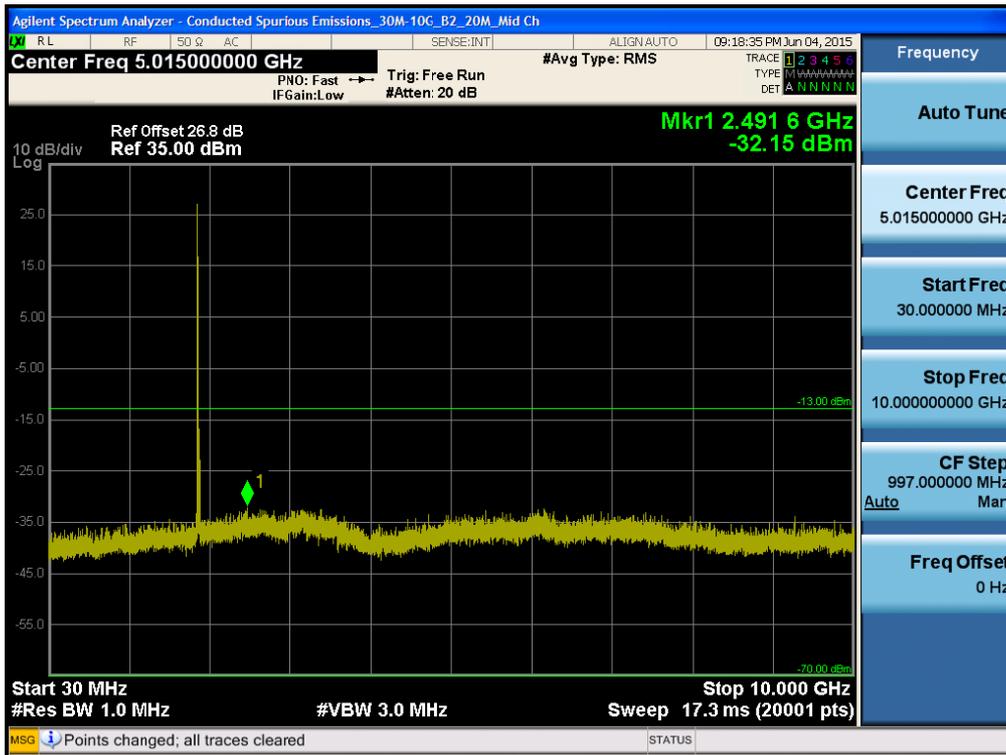


BAND 2. Conducted Spurious Emission Plot\_2 (18900ch\_20MHz\_QPSK\_RB 1\_0)

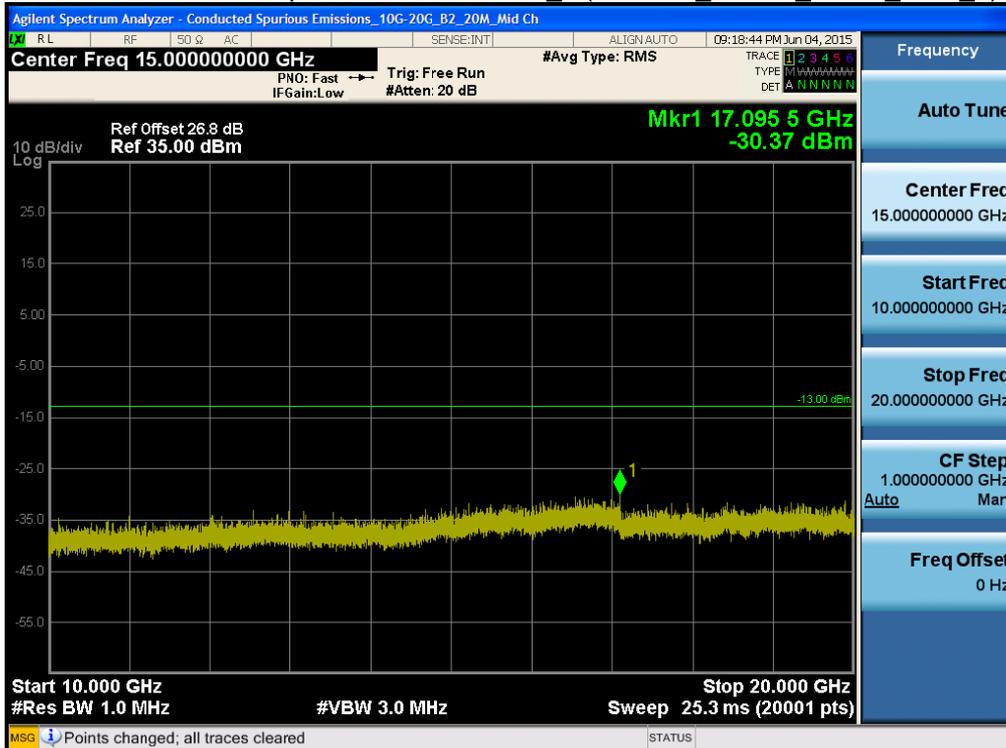


BAND 2. Conducted Spurious Emission Plot\_1 (19100ch\_20MHz\_QPSK\_RB 1\_0)

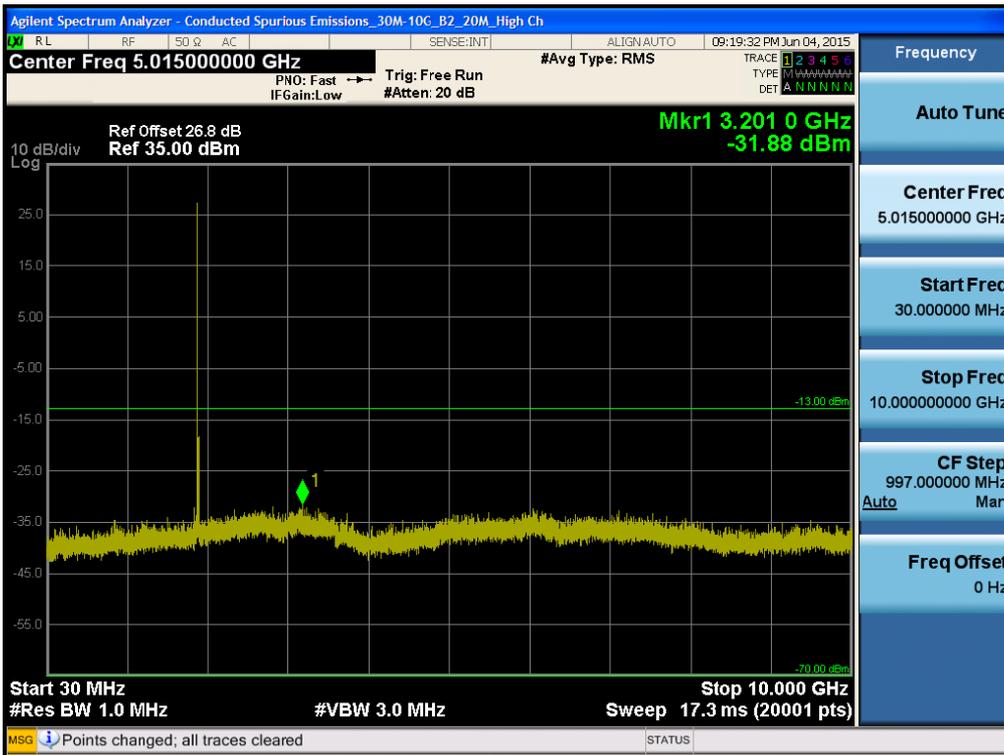


BAND 2. Conducted Spurious Emission Plot\_2 (19100ch\_20MHz\_QPSK\_RB 1\_0)

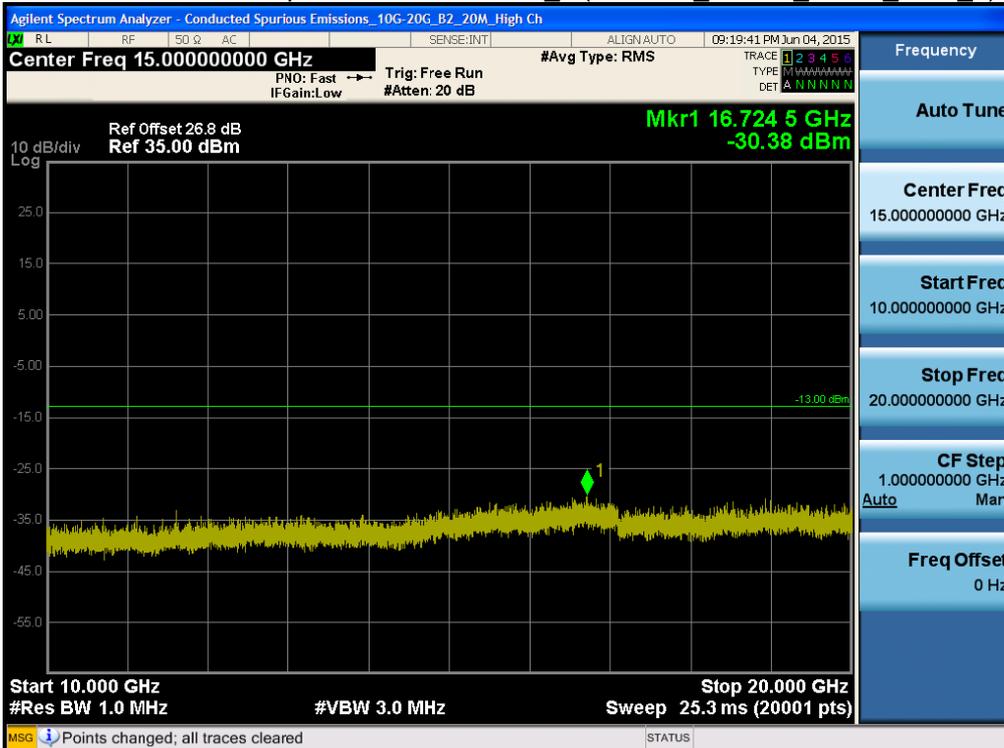


BAND 5. Conducted Spurious Emission Plot \_1 (20407ch\_1.4MHz\_QPSK\_RB 1\_0)

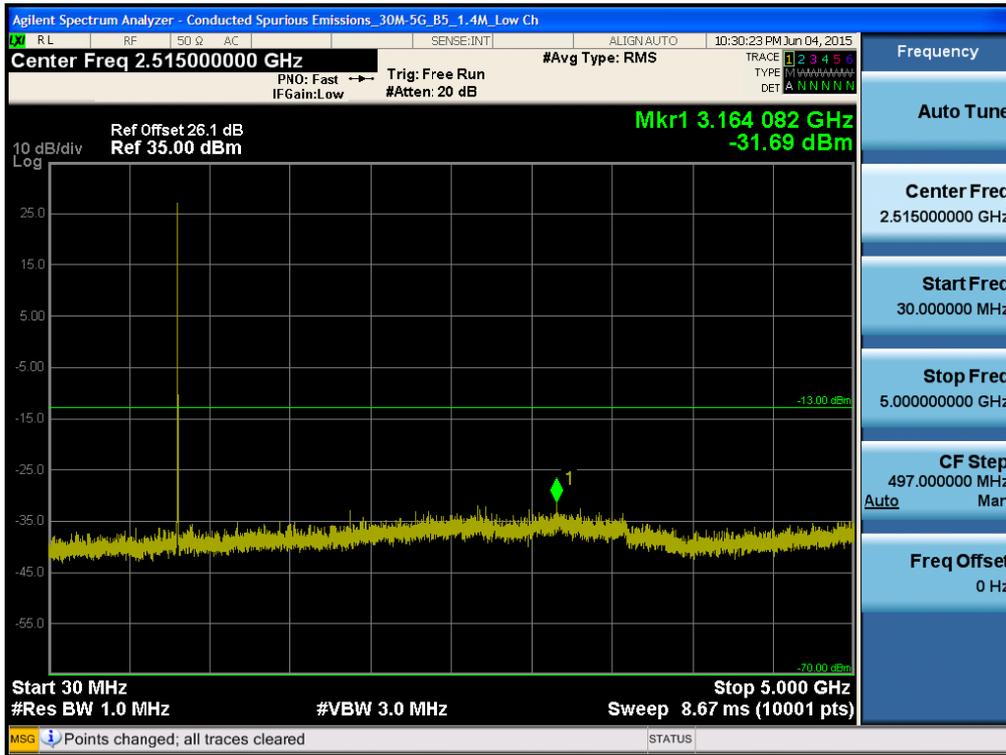


BAND 5. Conducted Spurious Emission Plot \_2 (20407ch\_1.4MHz\_QPSK\_RB 1\_0)

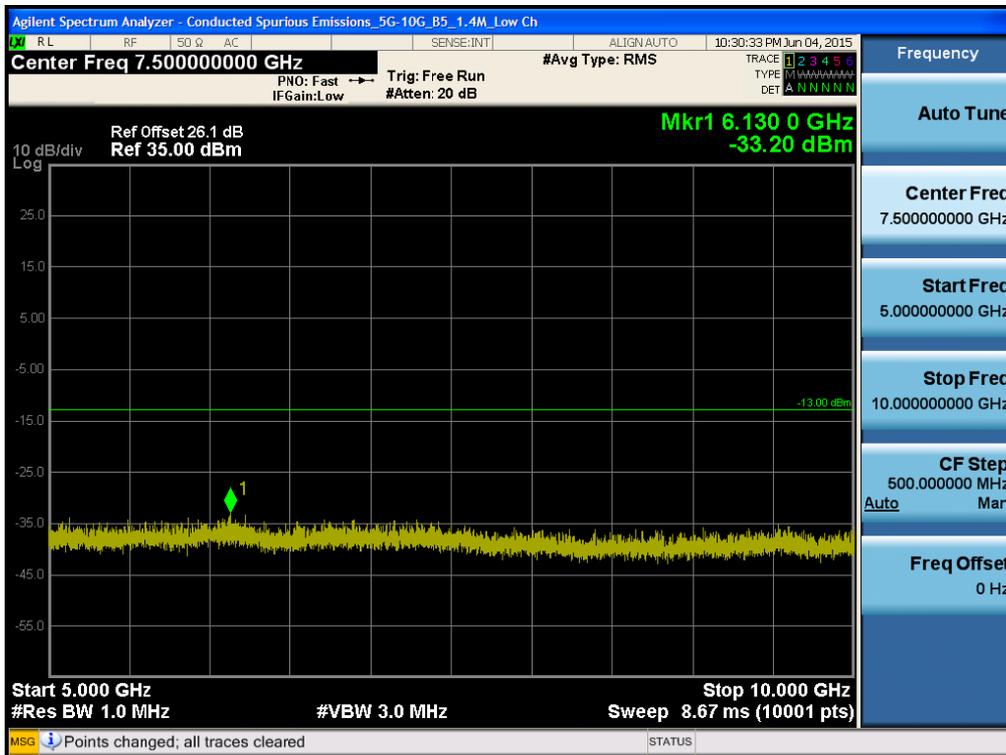


BAND 5. Conducted Spurious Emission Plot \_1 (20525ch\_1.4MHz\_QPSK\_RB 1\_0)

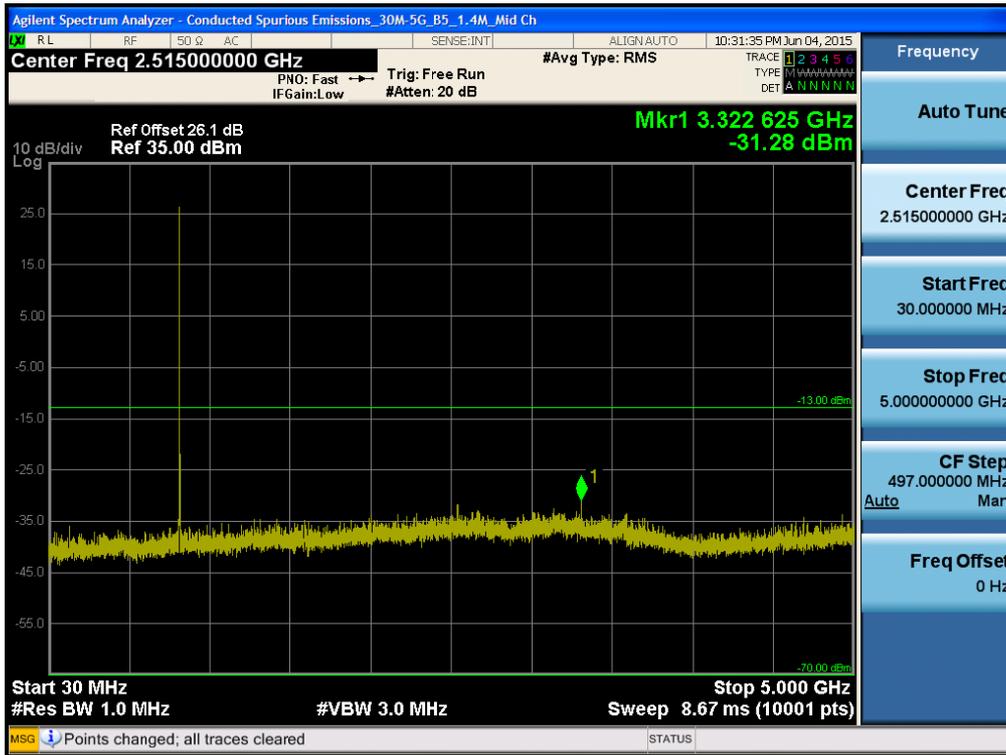


BAND 5. Conducted Spurious Emission Plot \_2 (20525ch\_1.4MHz\_QPSK\_RB 1\_0)

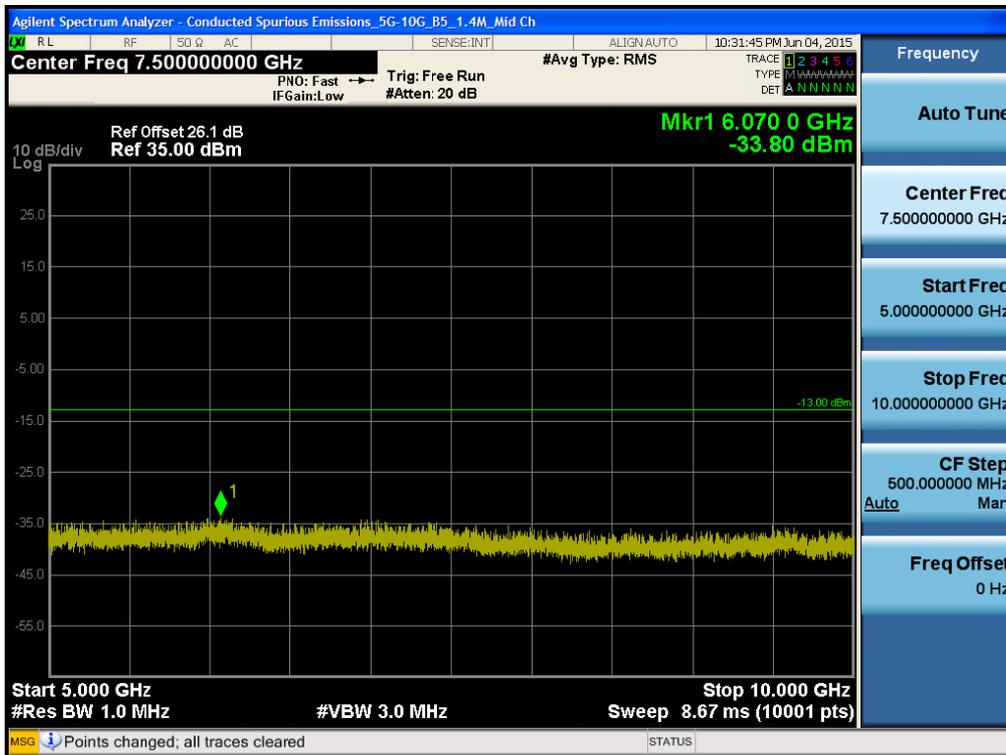


BAND 5. Conducted Spurious Emission Plot \_1 (20643ch\_1.4MHz\_QPSK\_RB 1\_0)

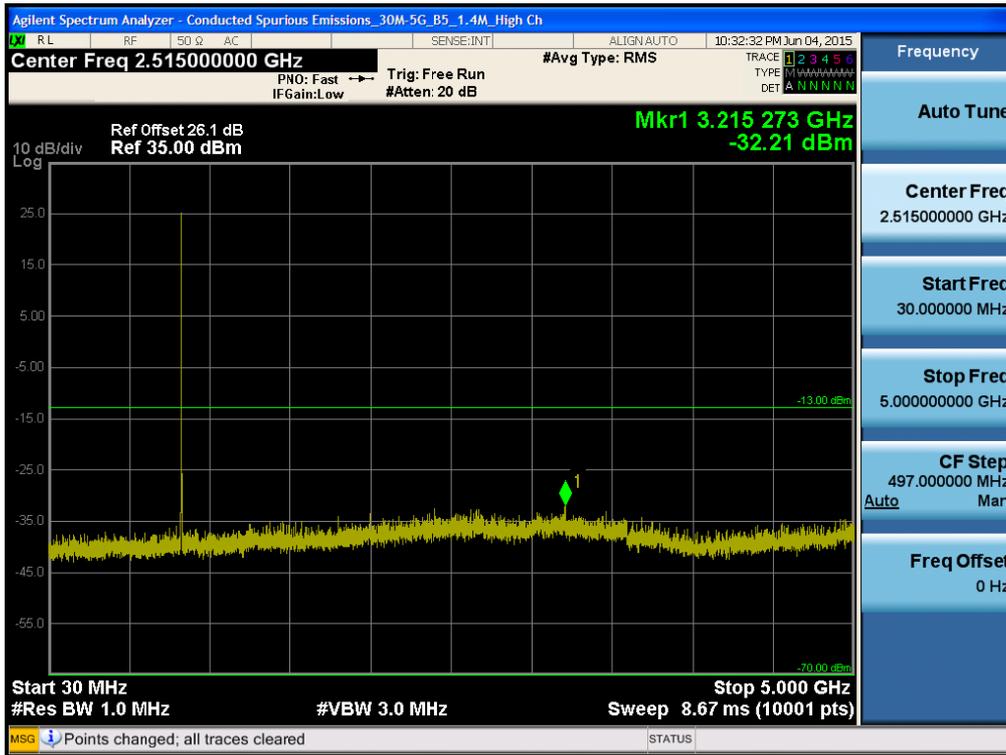


BAND 5. Conducted Spurious Emission Plot \_2 (20643ch\_1.4MHz\_QPSK\_RB 1\_0)

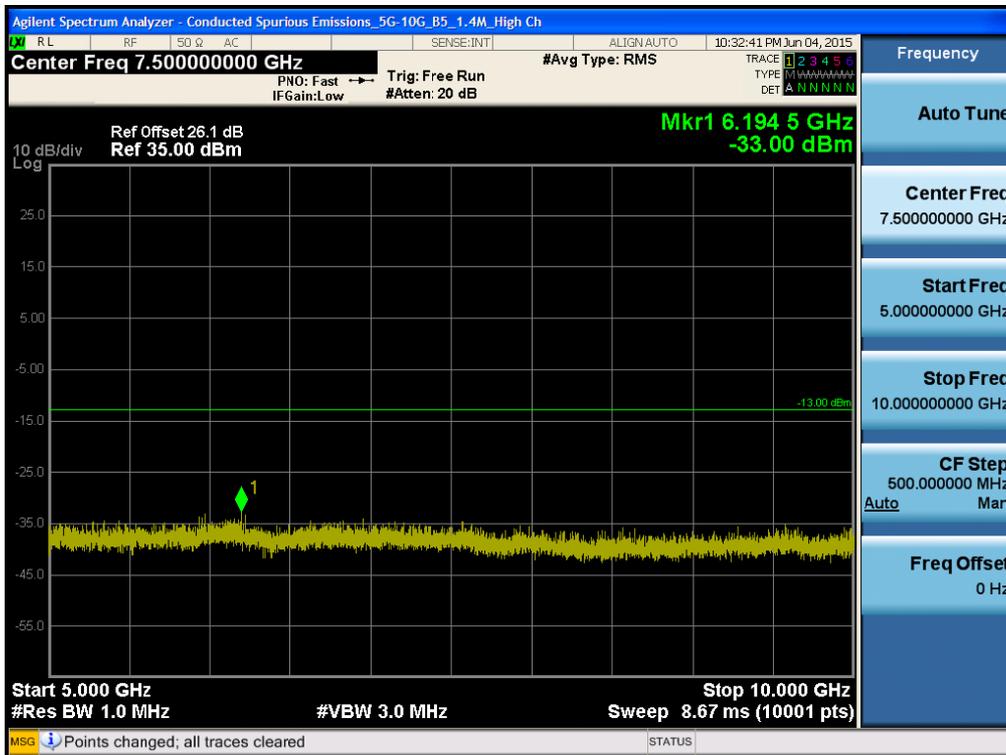


BAND 5. Conducted Spurious Emission Plot \_1 (20415ch\_3MHz\_QPSK\_RB 1\_0)

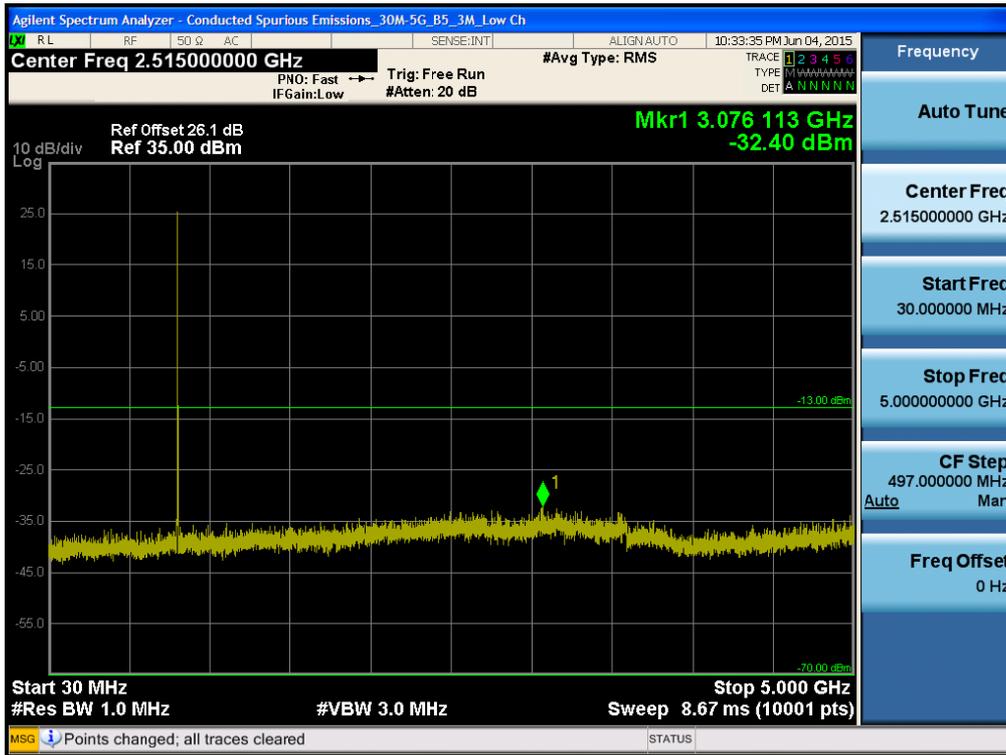


BAND 5. Conducted Spurious Emission Plot \_2 (20415ch\_3MHz\_QPSK\_RB 1\_0)

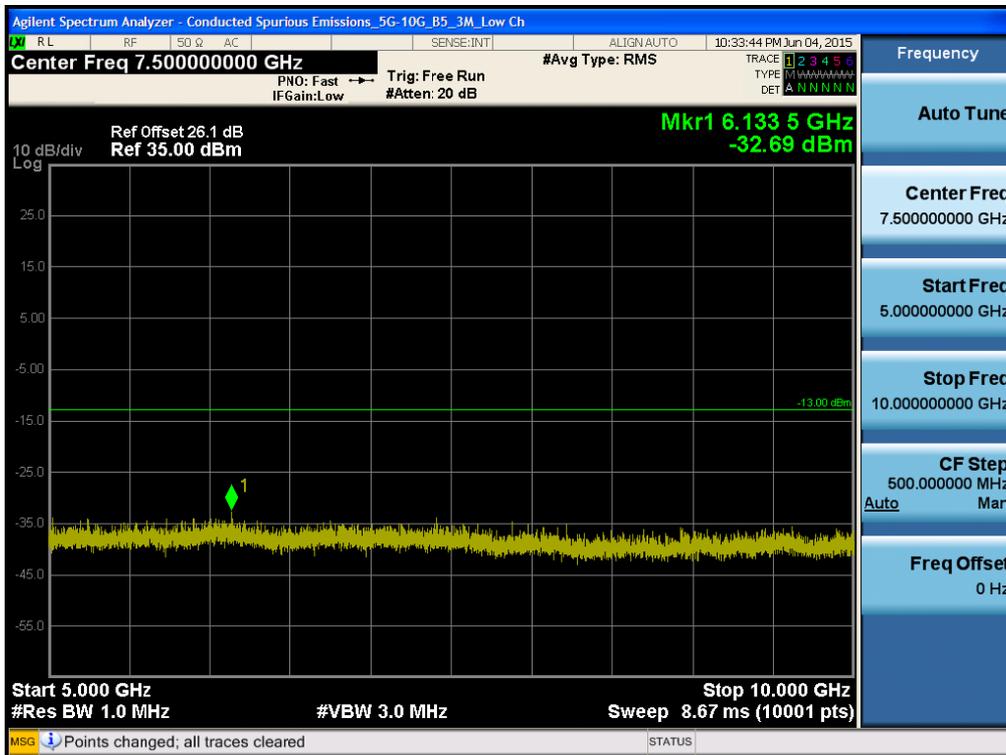


BAND 5. Conducted Spurious Emission Plot \_1 (20525ch\_3MHz\_QPSK\_RB 1\_0)

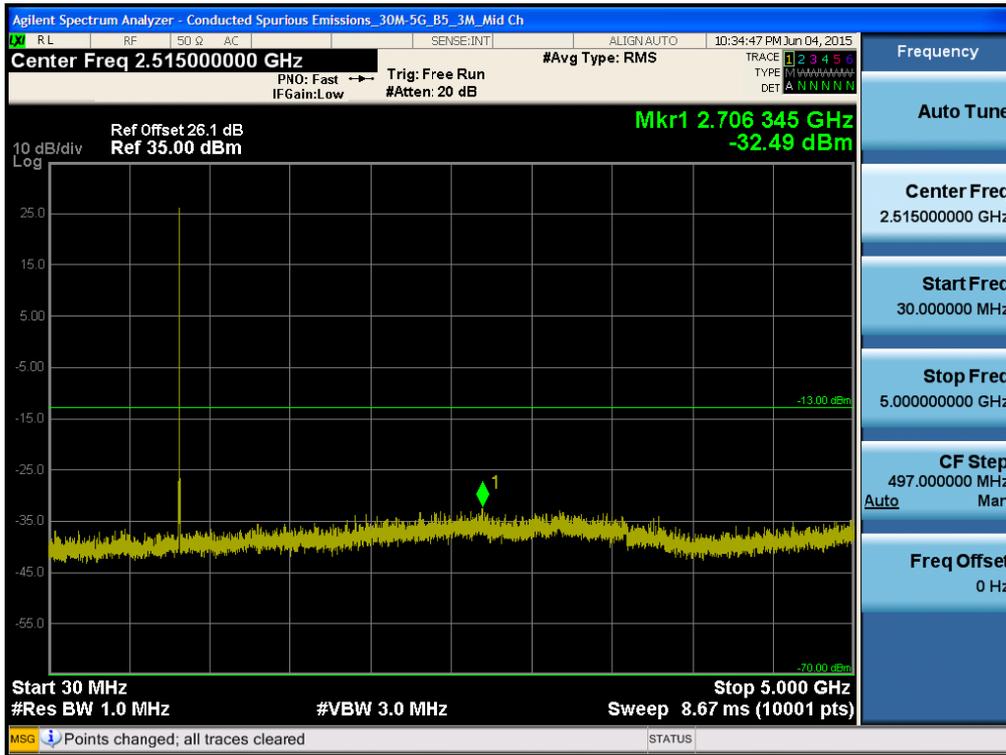

BAND 5. Conducted Spurious Emission Plot \_2 (20525ch\_3MHz\_QPSK\_RB 1\_0)

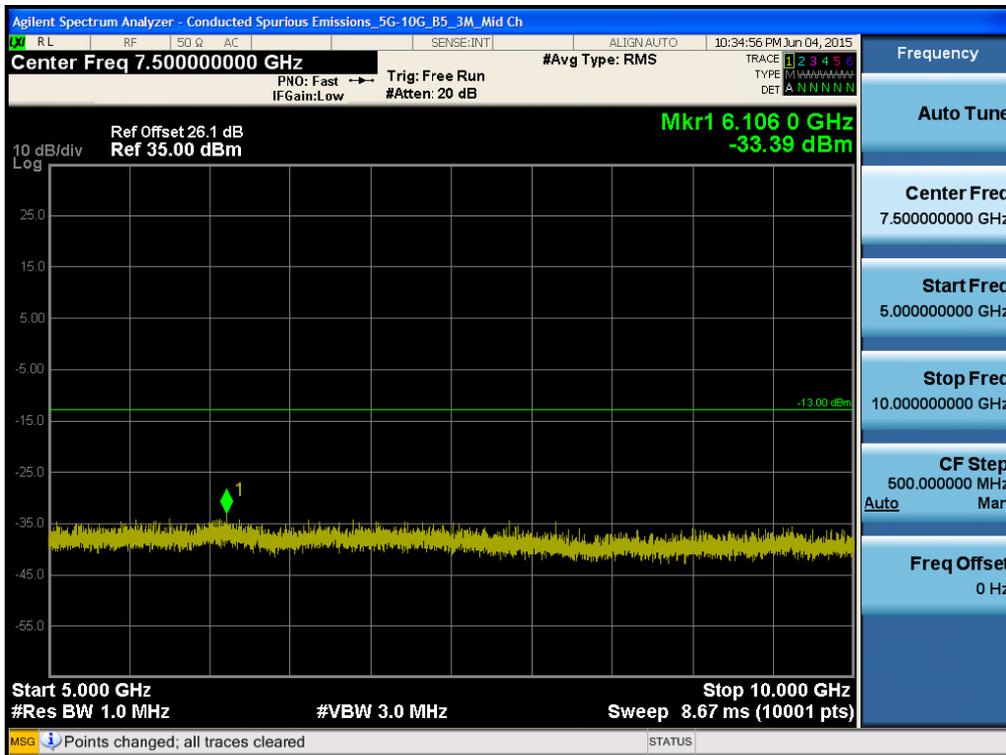

BAND 5. Conducted Spurious Emission Plot \_1 (20635ch\_3MHz\_QPSK\_RB 1\_0)

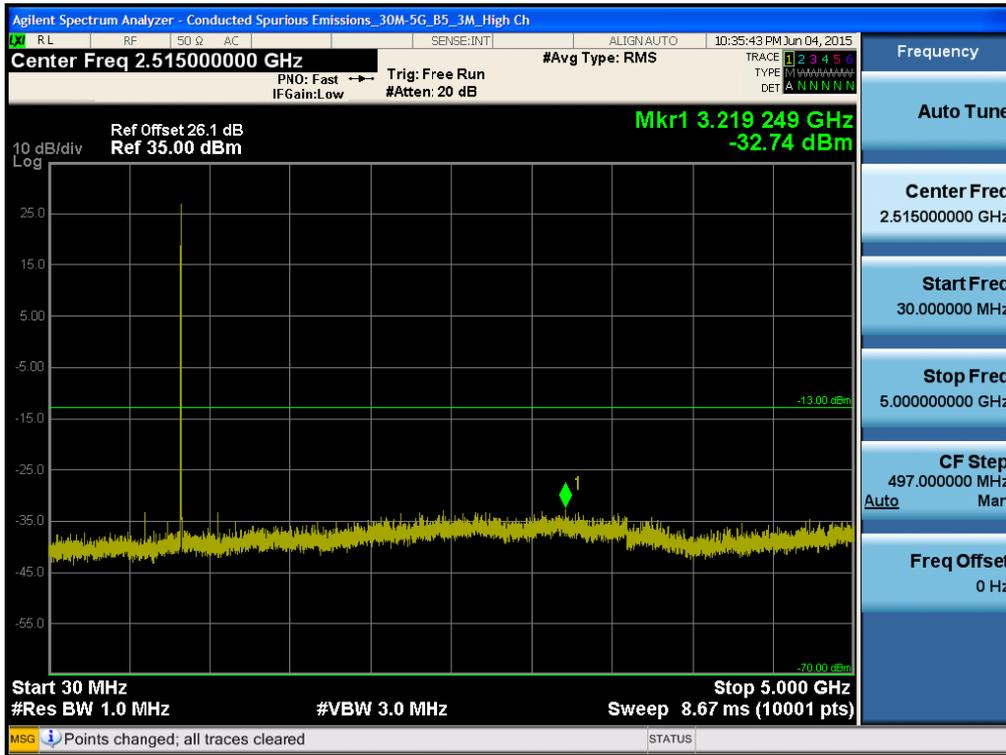

BAND 5. Conducted Spurious Emission Plot \_2 (20635ch\_3MHz\_QPSK\_RB 1\_0)

