

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-197-RWD-044

AGR No. : A193A-241

Applicant : LG Electronics USA

Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 07632

Manufacturer : LG Electronics Inc.

Address : 222 LG-ro, Jinwi-Myeon, Pyeongtaek -Si, Gyeonggi-Do, 451-713, Korea

Type of Equipment : Car Navigation

FCC ID. : BEJ-MEBICAS3

Model Name : MEB ICAS3

Serial number : N/A

Total page of Report : 88 pages (including this page)

Date of Incoming : May 20, 2019

Date of issue : July 19, 2019

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Ha-Ram Lee / Assistant Manager
ONETECH Corp.

Approved by:



Jae-Ho Lee / Chief Engineer
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	8
3. GENERAL INFORMATION.....	9
3.1 PRODUCT DESCRIPTION.....	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	11
4. EUT MODIFICATIONS.....	12
5. SYSTEM TEST CONFIGURATION	12
5.1 JUSTIFICATION.....	12
5.2 PERIPHERAL EQUIPMENT	12
5.3 MODE OF OPERATION DURING THE TEST	13
5.4 CONFIGURATION OF TEST SYSTEM.....	13
5.5 ANTENNA REQUIREMENT	13
6. PRELIMINARY TEST	14
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	14
6.2 GENERAL RADIATED EMISSIONS TESTS	14
7. MINIMUM 20 DB BANDWIDTH.....	15
7.1 OPERATING ENVIRONMENT	15
7.2 TEST SET-UP	15
7.3 TEST EQUIPMENT USED	15
7.4 TEST DATA FOR 1 MBPS	16
7.5 TEST DATA FOR 2 MBPS	18
7.6 TEST DATA FOR 3 MBPS	20
8. HOPPING FREQUENCY SEPARATION.....	22
8.1 OPERATING ENVIRONMENT	22
8.2 TEST SET-UP	22
8.3 TEST EQUIPMENT USED	22

8.4 TEST DATA FOR 1 MBPS	23
8.5 TEST DATA FOR 2 MBPS	24
8.6 TEST DATA FOR 3 MBPS	25
9. NUMBER OF HOPPING CHANNELS	26
9.1 OPERATING ENVIRONMENT	26
9.2 TEST SET-UP	26
9.3 TEST EQUIPMENT USED	26
9.4 TEST DATA FOR 1 MBPS	27
9.5 TEST DATA FOR 2 MBPS	30
9.6 TEST DATA FOR 3 MBPS	33
10. TIME OF OCCUPANCY	36
10.1 OPERATING ENVIRONMENT	36
10.2 TEST SET-UP	36
10.3 TEST EQUIPMENT USED	36
10.4 TEST DATA FOR 1 MBPS	37
10.5 TEST DATA FOR 2 MBPS	40
10.6 TEST DATA FOR 3 MBPS	43
11. MAXIMUM PEAK OUTPUT POWER	46
11.1 OPERATING ENVIRONMENT	46
11.2 TEST SET-UP	46
11.3 TEST EQUIPMENT USED	46
11.4 TEST DATA FOR 1 MBPS	47
11.5 TEST DATA FOR 2 MBPS	50
11.6 TEST DATA FOR 3 MBPS	53
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	56
12.1 OPERATING ENVIRONMENT	56
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	56
12.3 TEST SET-UP FOR RADIATED MEASUREMENT	56
12.4 TEST EQUIPMENT USED	56
12.5 TEST DATA FOR CONDUCTED EMISSION	57
12.5.1 Test data for 1 Mbps	57
12.5.2 Test data for 2 Mbps	63
12.5.3 Test data for 3 Mbps	69
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	75
12.6.1 Radiated Emission which fall in the Restricted Band	75
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz	78

<i>12.6.3 Spurious Radiated Emission.....</i>	<i>81</i>
<i>12.6.4 Test Data for Co-Location (BT+WLAN 2.4GHz)</i>	<i>83</i>
<i>12.6.5 Test Data for Co-Location (BT+WLAN 5.2GHz)</i>	<i>85</i>
<i>12.6.6 Test Data for Co-Location (BT+WLAN 5.8GHz)</i>	<i>87</i>

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-197-RWD-044	July 19, 2019	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

APPLICANT : LG Electronics USA
 ADDRESS : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 07632
 CONTACT PERSON : Kyung-Su Han / Director
 TELEPHONE NO : (201) 266-2215
 FCC ID : BEJ-MEBICAS3
 MODEL NAME : MEB ICAS3
 BRAND NAME : LG, Volkswagen, SKODA, SEAT
 SERIAL NUMBER : N/A
 DATE : July 19, 2019

EQUIPMENT CLASS	<i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i>
KIND OF EQUIPMENT	Car Navigation
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	N / A
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model MEB ICAS3 (referred to as the EUT in this report) is a Car Navigation. Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Car Navigation			
FREQUENCY RANGE	Bluetooth	2 402 MHz ~ 2 480 MHz		
	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))		
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n/ac(HT20))	
			5 190 MHz ~ 5 230 MHz (802.11n/ac(HT40))	
			5 210 MHz (802.11ac(VHT80))	
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n/ac(HT20))	
			5 755 MHz ~ 5 795 MHz (802.11n/ac(HT40))	
			5 775 MHz (802.11ac(VHT80))	
MAX. RF OUTPUT POWER	Bluetooth	1 Mbps	-1.56 dBm	
		2 Mbps	-0.88 dBm	
		3 Mbps	-0.54 dBm	
	WLAN 2.4 GHz Band	Wi-Fi 802.11b (10.63 dBm) Wi-Fi 802.11g (11.85 dBm) Wi-Fi 802.11n(HT20) (10.93 dBm)		
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (10.97 dBm) Wi-Fi 802.11n(HT20) (10.86 dBm) Wi-Fi 802.11n(HT40) (8.64 dBm) Wi-Fi 802.11ac(VHT80) (8.05 dBm)
			Antenna 1	Wi-Fi 802.11a (10.03 dBm) Wi-Fi 802.11n(HT20) (9.74 dBm) Wi-Fi 802.11n(HT40) (7.92 dBm) Wi-Fi 802.11ac(VHT80) (7.09 dBm)
			Multiple transmit	Wi-Fi 802.11n(HT20) (13.34 dBm) Wi-Fi 802.11n(HT40) (11.31 dBm) Wi-Fi 802.11ac(VHT80) (10.61 dBm)

MAX. RF OUTPUT POWER	WLAN 5 GHz Band	5 725 MHz ~ 5 850 MHz Band		Antenna 0	Wi-Fi 802.11a (10.62 dBm) Wi-Fi 802.11n(HT20) (10.53 dBm) Wi-Fi 802.11n(HT40) (8.31 dBm) Wi-Fi 802.11ac(VHT80) (7.63 dBm)		
				Antenna 1	Wi-Fi 802.11a (9.48 dBm) Wi-Fi 802.11n(HT20) (9.86 dBm) Wi-Fi 802.11n(HT40) (8.07 dBm) Wi-Fi 802.11ac(VHT80) (6.99 dBm)		
				Multiple transmit	Wi-Fi 802.11n(HT20) (13.15 dBm) Wi-Fi 802.11n(HT40) (11.20 dBm) Wi-Fi 802.11ac(VHT80) (10.33 dBm)		
MODULATION TYPE	Bluetooth			GFSK for 1 Mbps, π /4-DQPSK for 2 Mbps, 8-DPSK for 3 Mbps			
	WLAN 2.4 GHz Band			DSSS Modulation(DBPSK/DQPSK/CCK) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)			
	WLAN 5 GHz Band			OFDM Modulation(BPSK/QPSK/16QAM/64QAM)			
ANTENNA TYPE	Bluetooth			PCB Antenna			
	WLAN (2.4GHz Band)			Chip Antenna			
	WLAN (5GHz Band)	Antenna 0		PCB Antenna			
		Antenna 1		Chip Antenna			
ANTENNA GAIN	Bluetooth			2.5 dBi			
	WLAN 2.4 GHz Band			3.8 dBi			
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz 5 725 MHz ~ 5 850 MHz		ANT0	3.8 dBi		
				ANT1	1.6 dBi		
				ANT0	5.5 dBi		
				ANT1	2.4 dBi		
	5 GHz Band (ANT 0 + 1)	5 150 MHz ~ 5 250 MHz		5.78 dBi			
		5 725 MHz ~ 5 850 MHz		7.10 dBi			
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)				31.25 MHz, 28.63636 MHz			
RATED SUPPLY VOLTAGE				DC 12.0 V			

- Directional Gain Calculations

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added config and their differences:

Brand	Model	Feature	VW P/N	LG P/N	ABT (FPD-LINK)	FPK (FPD-LINK)	USB NO.	BT +WIFI	CAN NO.	ETH 1Gb/s	FM Always PD+BGS	A2B	DAB (MRC+BGS)	AR- HUD	Tuner IC	Tested
LG VW, SKODA, SEAT	MEB ICAS3	Nav	(10A.035. 820)	NE9VW1- N2E	X	X	2	X	2	X	X	X	X		Mercury + Titan	☒
		AR HUD + Nav	(10A.035. 816)	NE9VW1- A2E	X	X	2	X	2	X	X	X	X	X	Mercury + Titan	☐
		Nav	(10A.035. 842)	NE0VW1- N2N	X	X	2	X	2	X	X	X			Mercury + SDARS	☐
		AR HUD + Nav	(10A.035. 877)	NE0VW1- A2N	X	X	2	X	2	X	X	X		X	Mercury + SDARS	☐
		Nav	(5LA.035. 820)	NE0SK1- N4E	X	X	2	X	2	X	X	X	X		Mercury + Titan	☐
		AR HUD + Nav	(5LA.035. 816)	NE0SK1-A4E	X	X	2	X	2	X	X	X	X	X	Mercury + Titan	☐
		Nav	(10E.035. 820)	NE0SE1-N3E	X	X	2	X	2	X	X	X	X		Mercury + Titan	☐
		AR HUD + Nav	(10E.035. 816)	NE0SE1-A3E	X	X	2	X	2	X	X	X	X	X	Mercury + Titan	☐

Note: 1. Applicants must delegate only the models with all features applied to be tested, therefore, this test report only guarantees the unit tested.

2. The Applicant/manufacture is responsible for the compliance of all configs.

4. EUT MODIFICATIONS

-, None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N / A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
G6-1121TV	HP	Notebook PC	EUT, AC/DC Adapter
PPP009C	HP	AC/DC Adapter	Notebook PC

5.3 Mode of operation during the test

For Bluetooth function testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. The EUT was set at Low Channel (2 402 MHz), Middle Channel (2 441 MHz), and High Channel (2 480 MHz) with each data transfer rate, 1 Mbps, 2 Mbps, and 3 Mbps. To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this test report.

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in a Charging & Transmitting mode. The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: The EUT was tested in a Charging & Transmitting mode. Preliminary radiated emissions test was conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed as to be attached permanently to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is a PCB Antenna, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

- As this product is only using DC power, AC conducted emission test has not been performed.

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting mode.	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

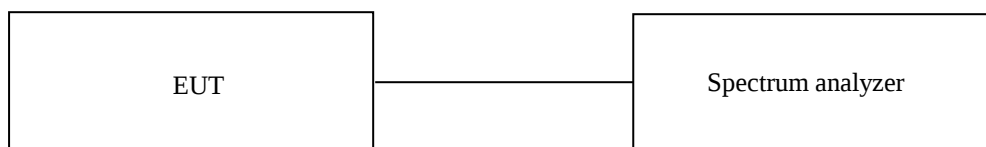

7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


7.4 Test data for 1 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	758.20
Middle	2 441	758.20
High	2 480	758.20




Tested by: Sieon Lee / Assistant Manager

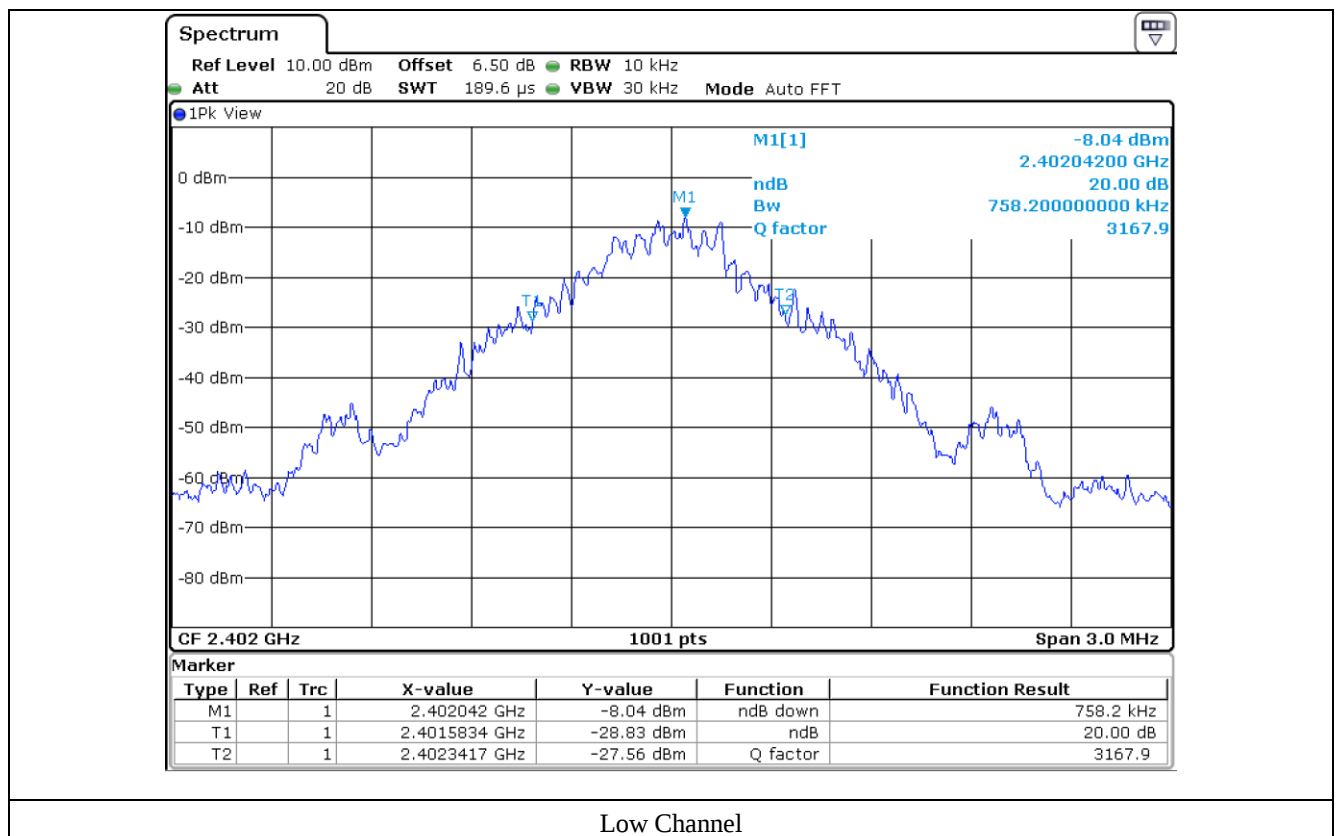

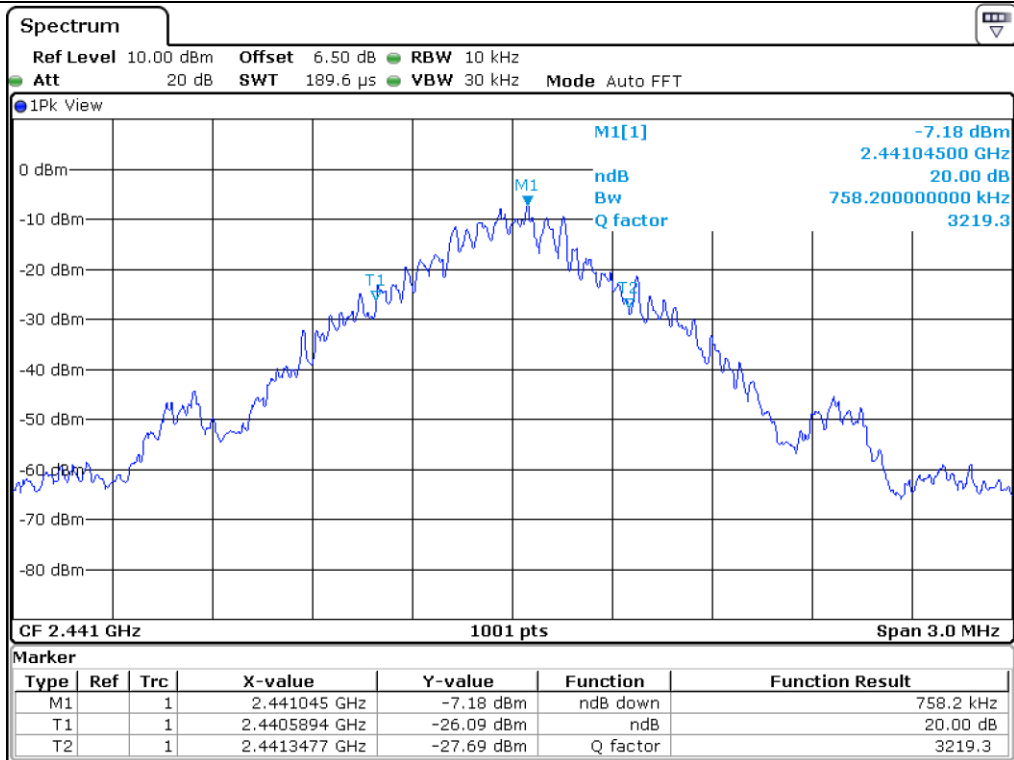

Middle Channel

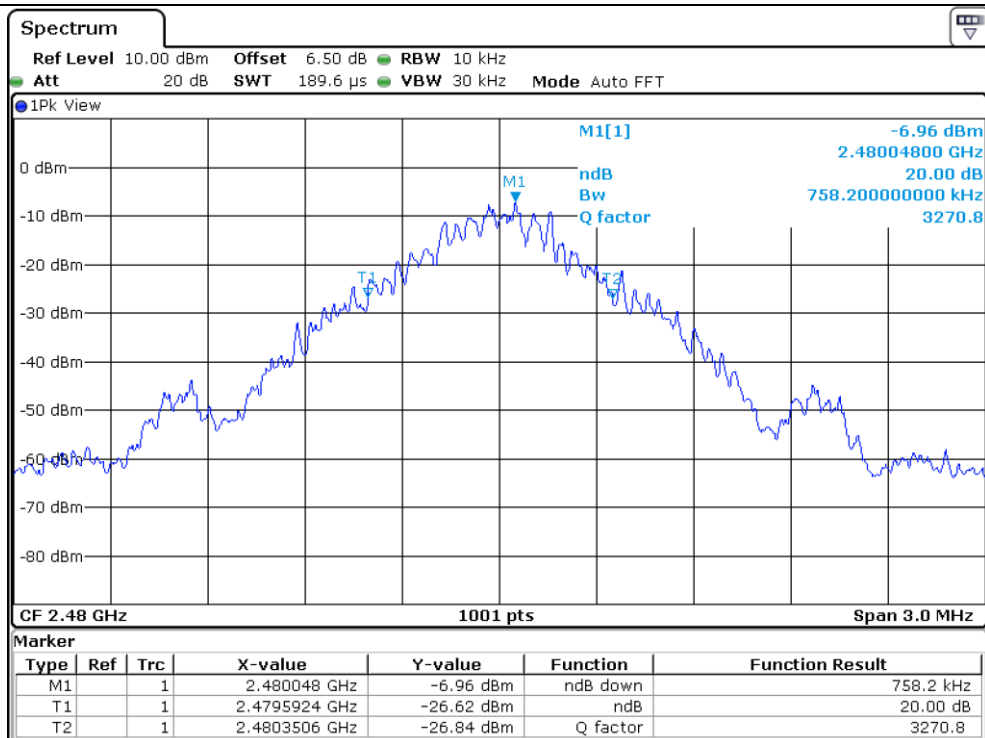

High Channel


7.5 Test data for 2 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 336.70
Middle	2 441	1 333.70
High	2 480	1 297.70




Tested by: Sieon Lee / Assistant Manager

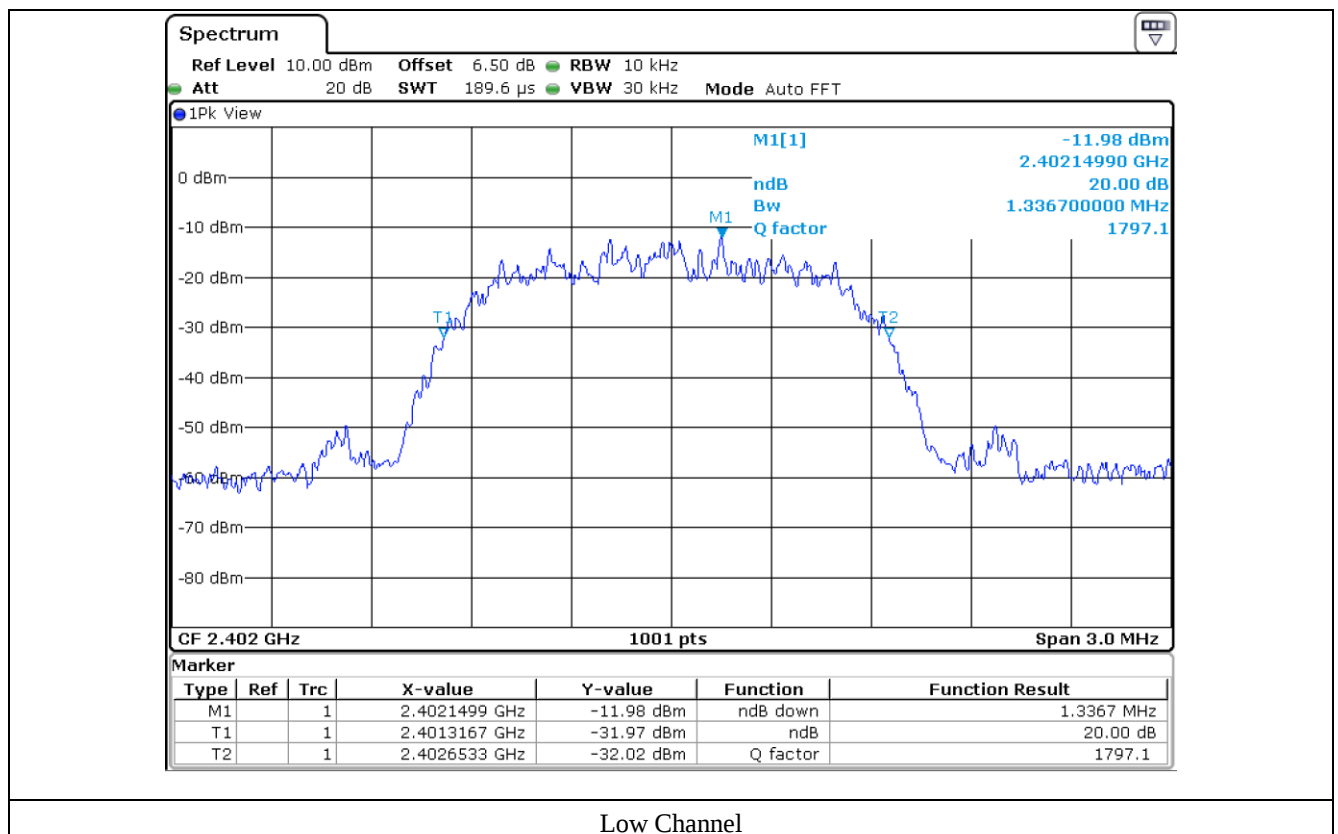

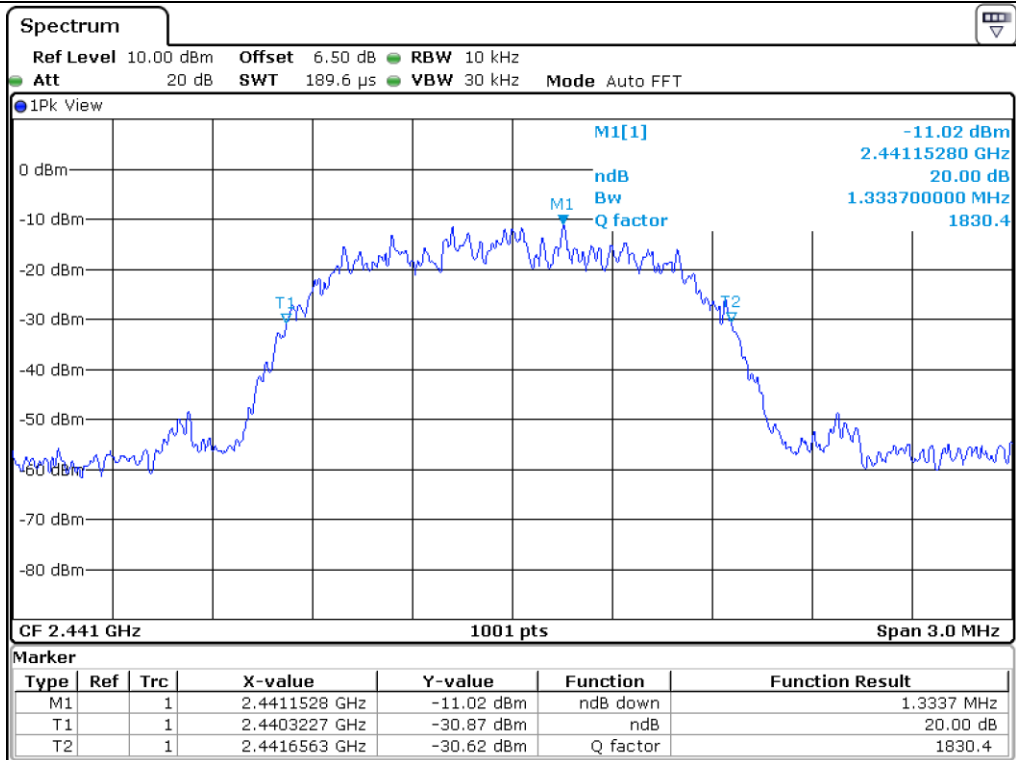

Middle Channel

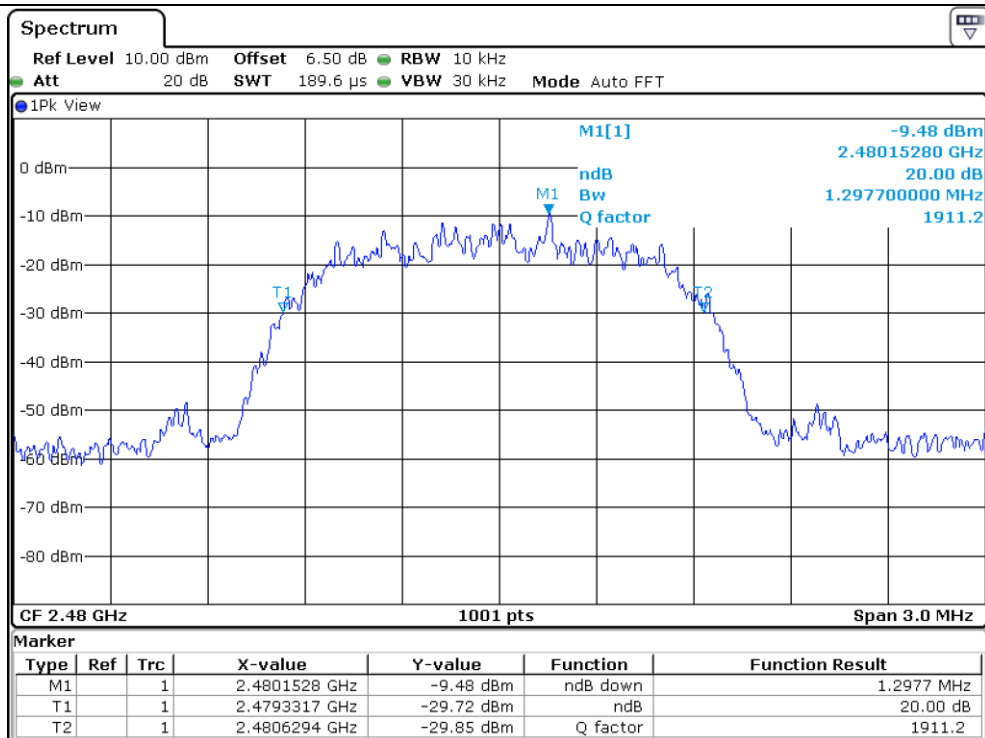

High Channel


7.6 Test data for 3 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 294.70
Middle	2 441	1 345.70
High	2 480	1 327.70


[Handwritten Signature]

Tested by: Sieon Lee / Assistant Manager

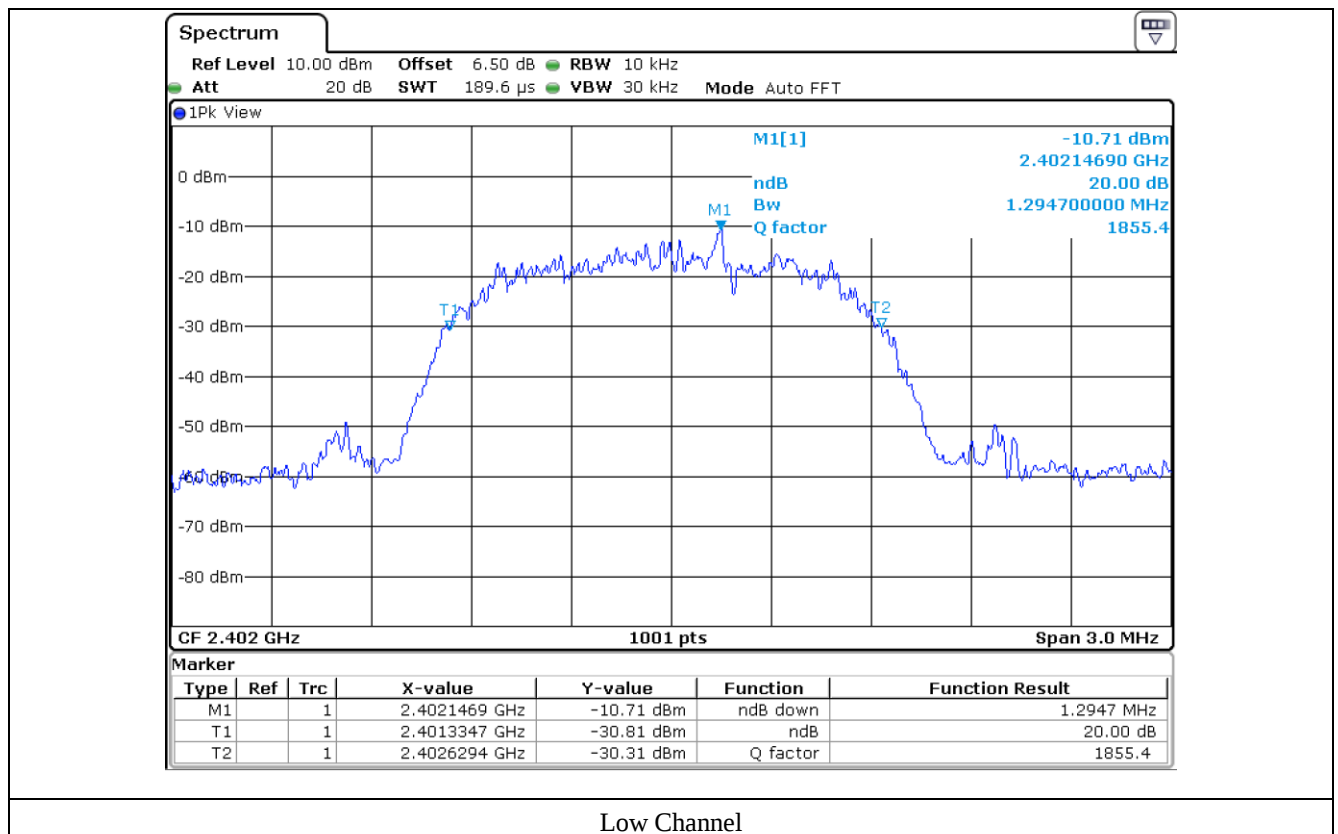

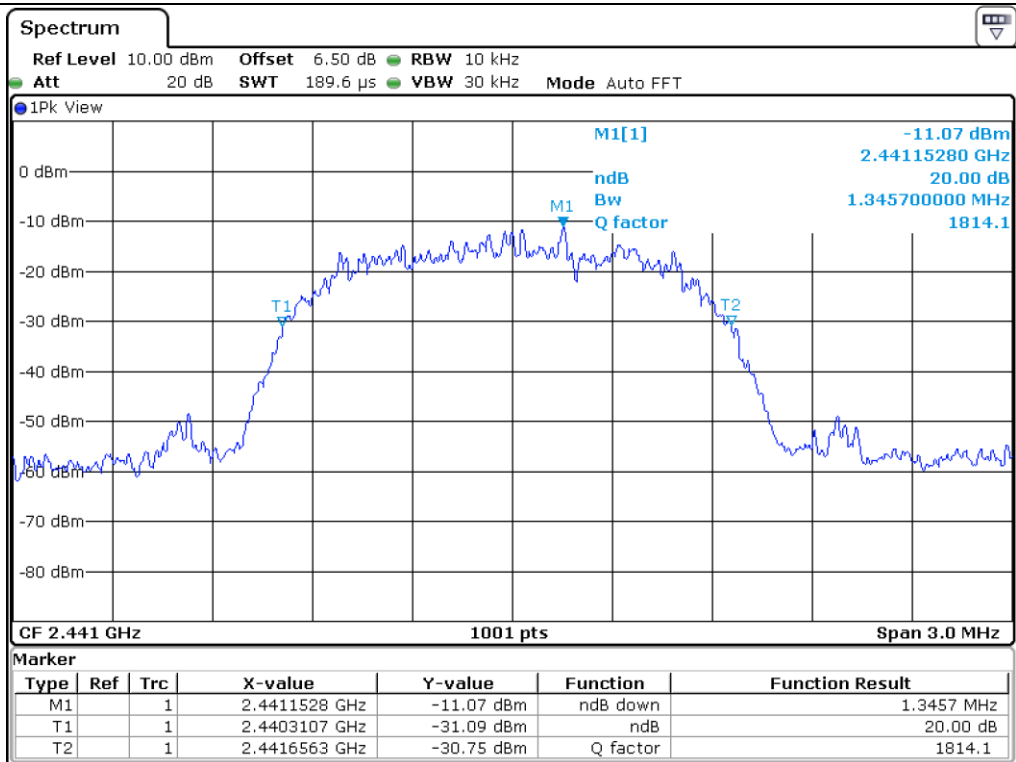

Middle Channel

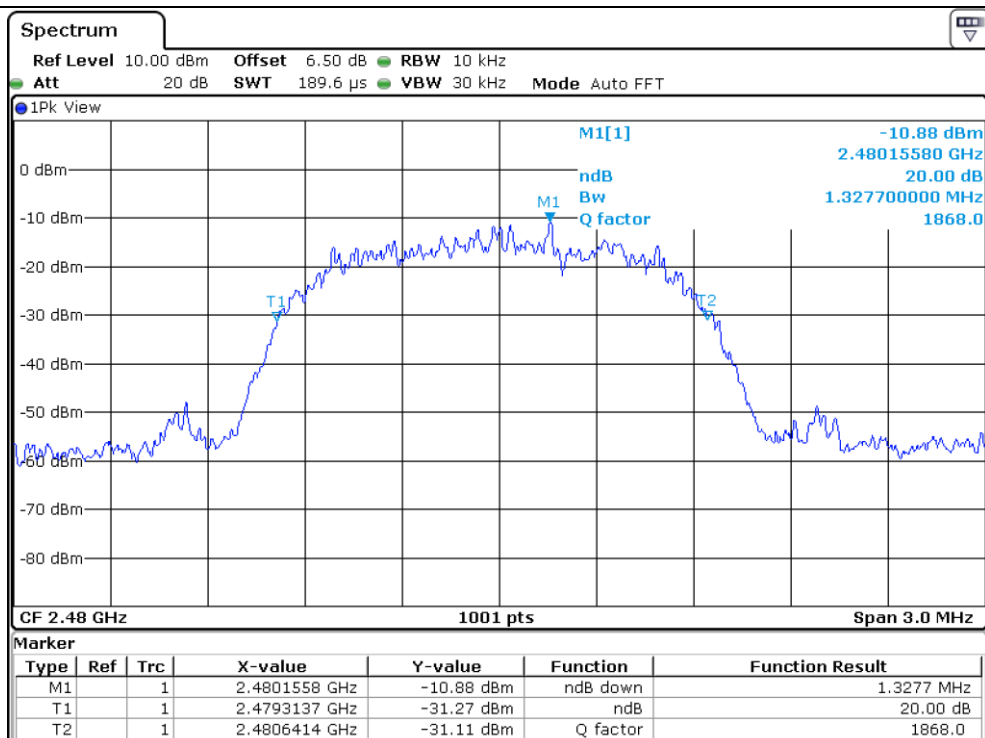

High Channel

8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.



8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 1 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019

-. Test Result : Pass

MEASURED VALUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	505.47	Separated by 25 kHz or <u>two-thirds of the 20 dB bandwidth of the hopping channel</u> , whichever is greater.



Tested by: Sieon Lee / Assistant Manager

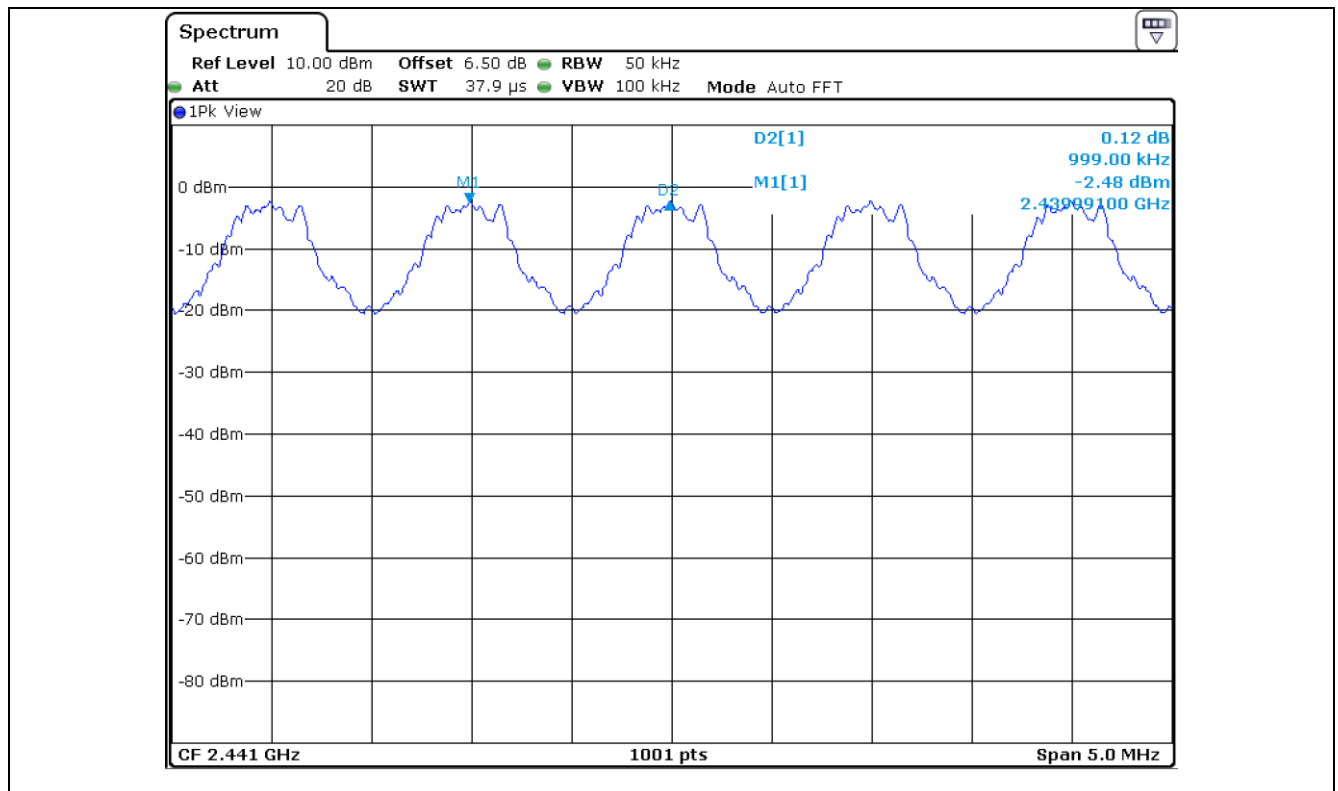

8.5 Test data for 2 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019

-. Test Result : Pass

MEASURED VALUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	891.13	Separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.



Tested by: Sieon Lee / Assistant Manager

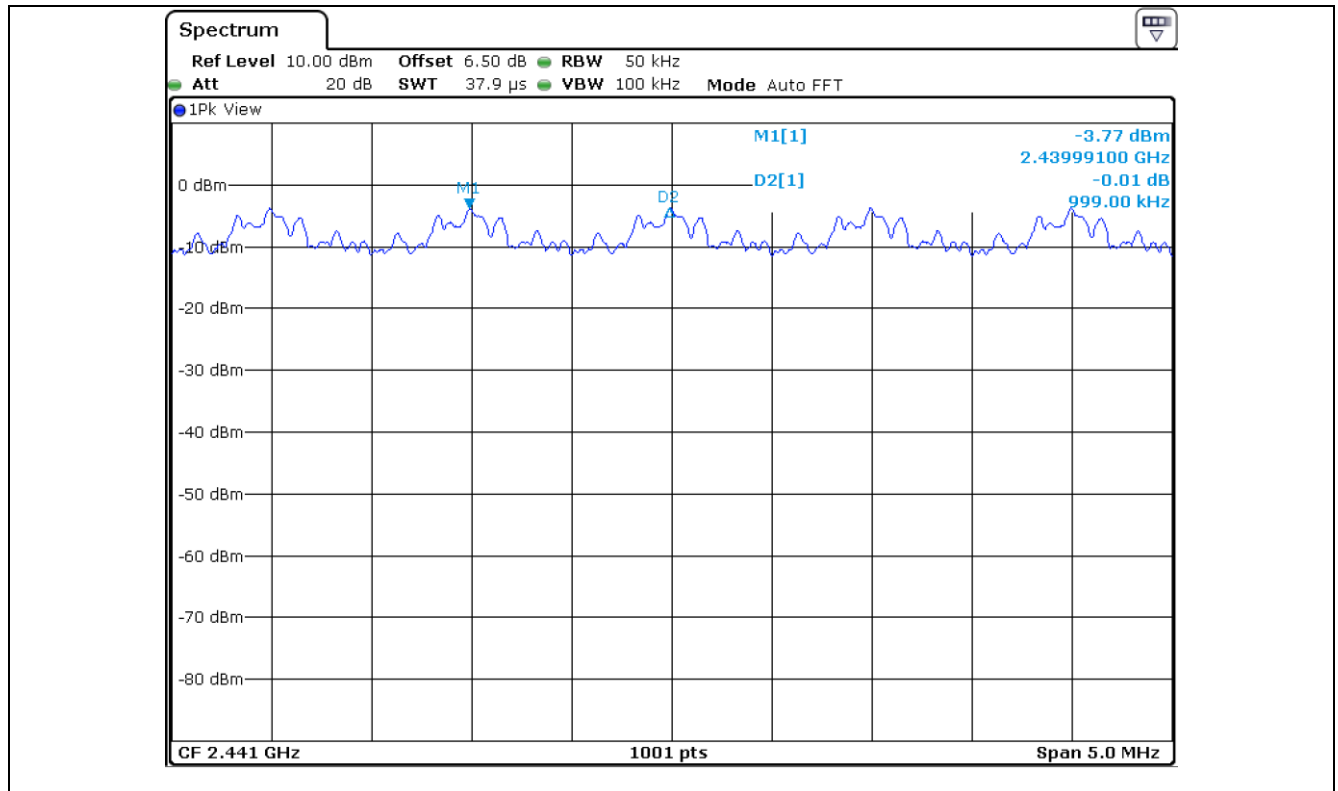

8.6 Test data for 3 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019

-. Test Result : Pass

MEASURED VALUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	897.13	Separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.



Tested by: Sieon Lee / Assistant Manager

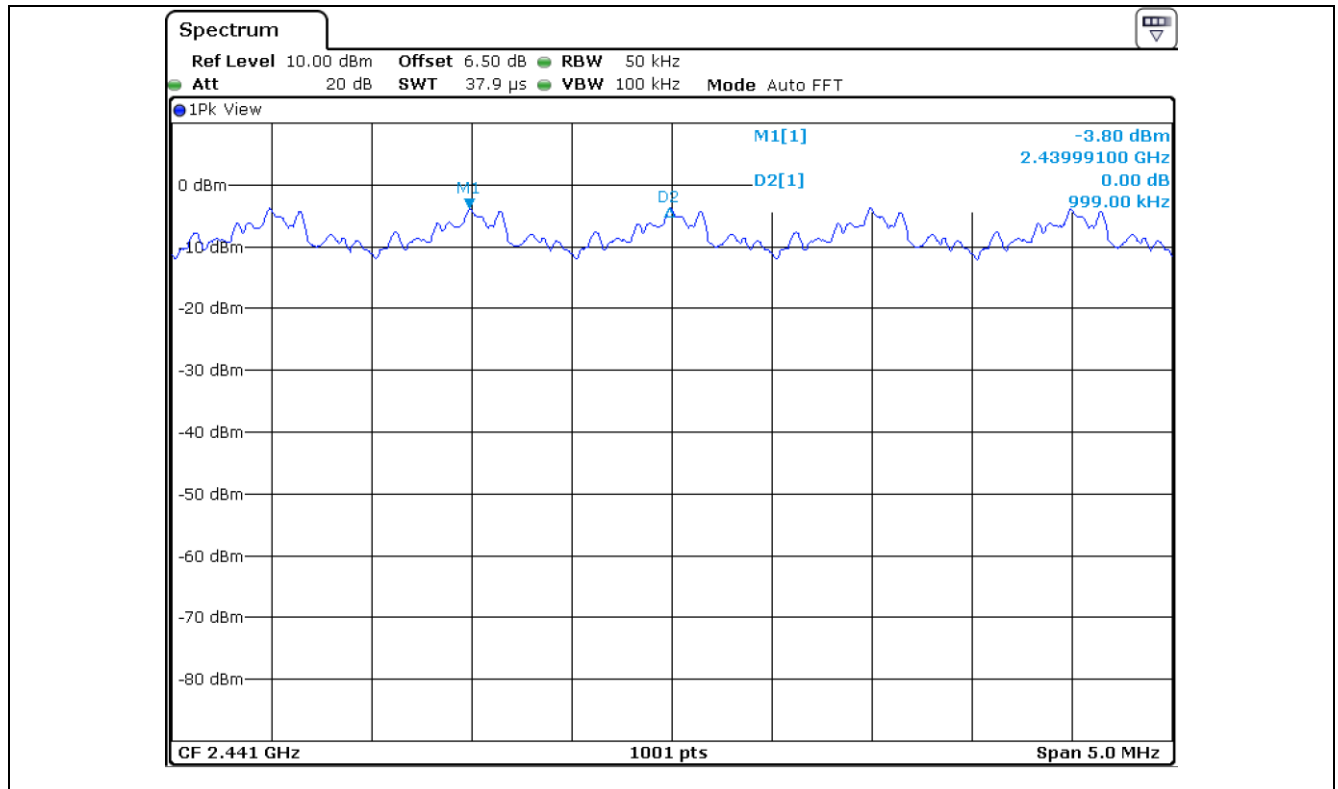


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 1 MHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

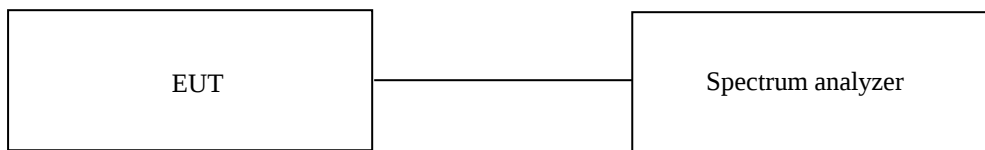

9.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

9.4 Test data for 1 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64




Tested by: Sieon Lee / Assistant Manager

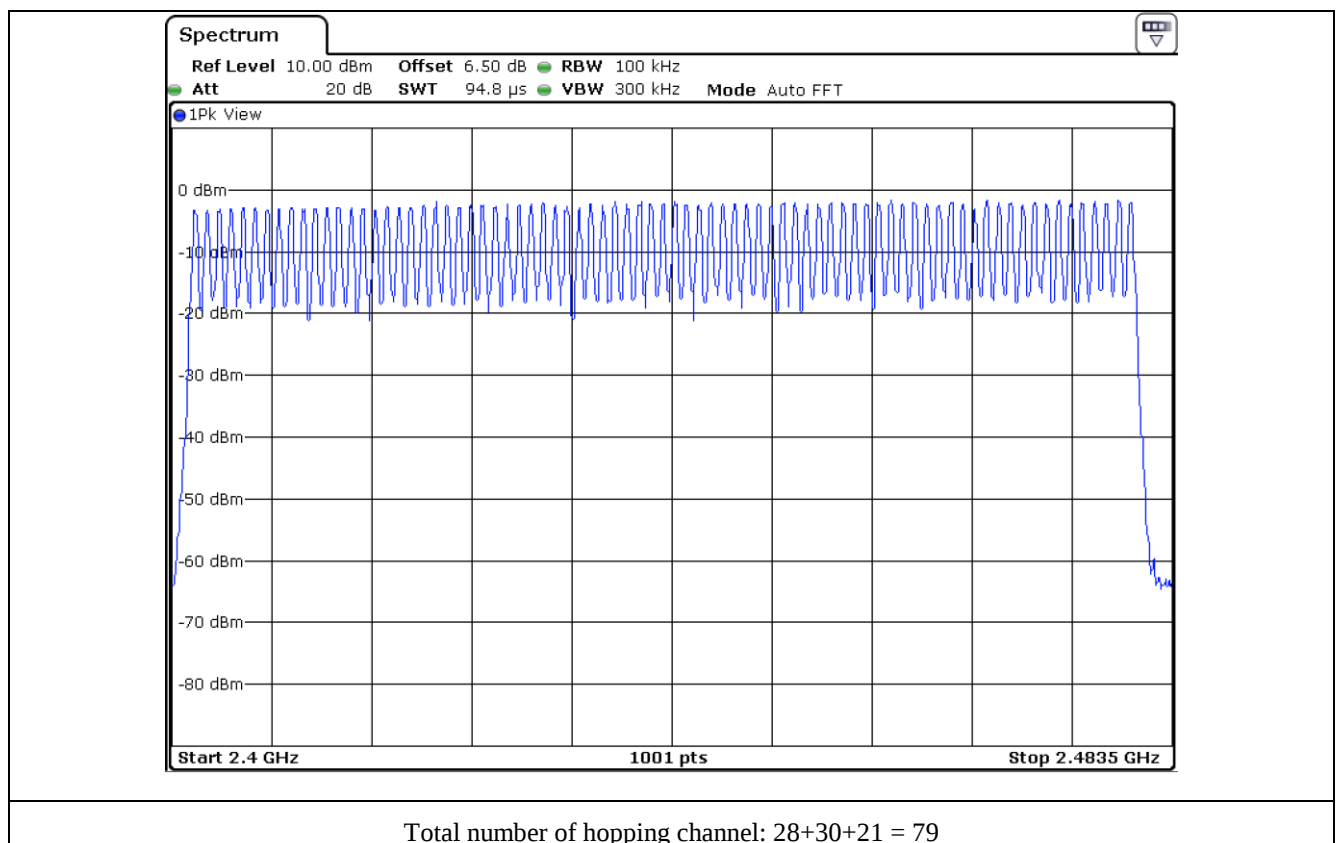


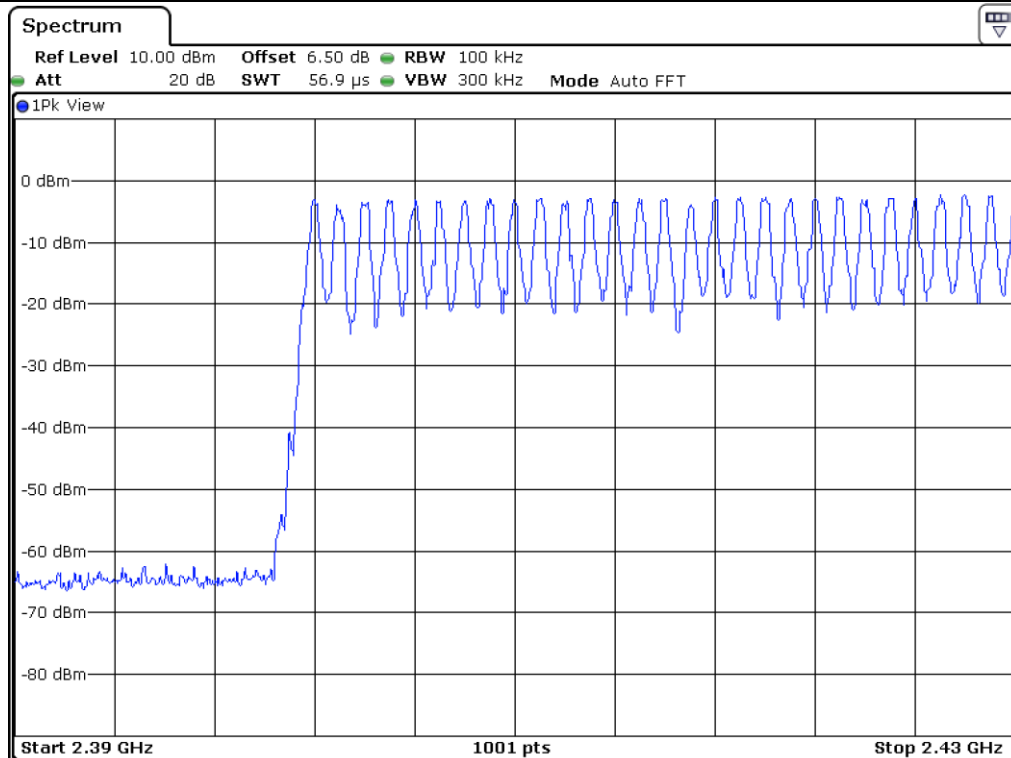

Number of hopping channel: 28

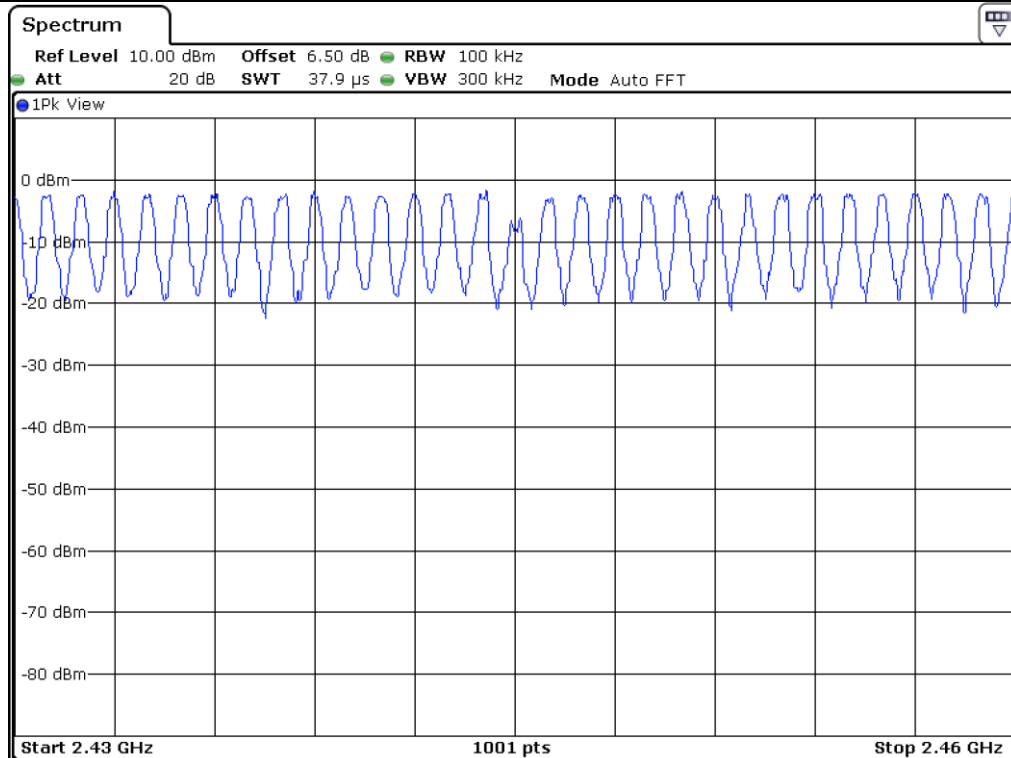

Number of hopping channel: 30

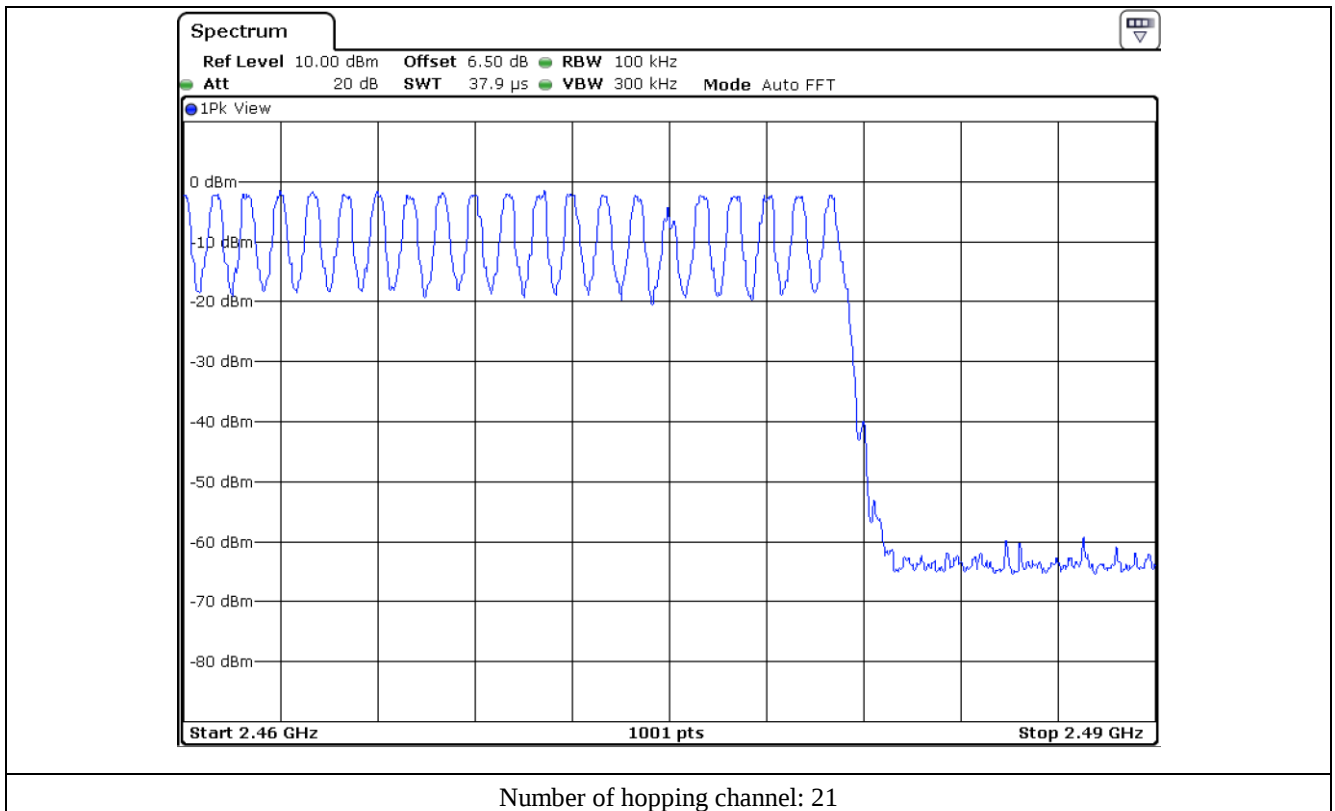

9.5 Test data for 2 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64




Tested by: Sieon Lee / Assistant Manager

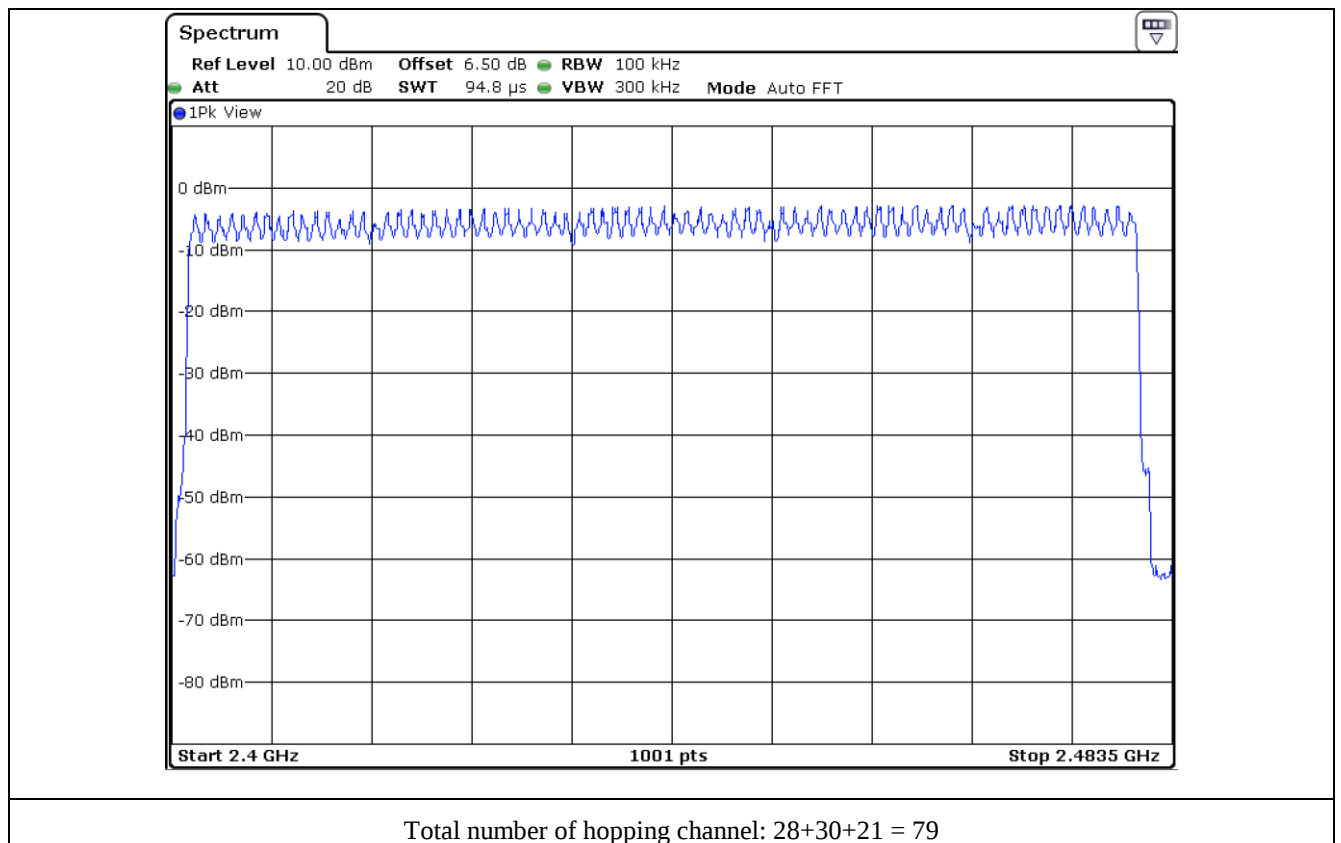


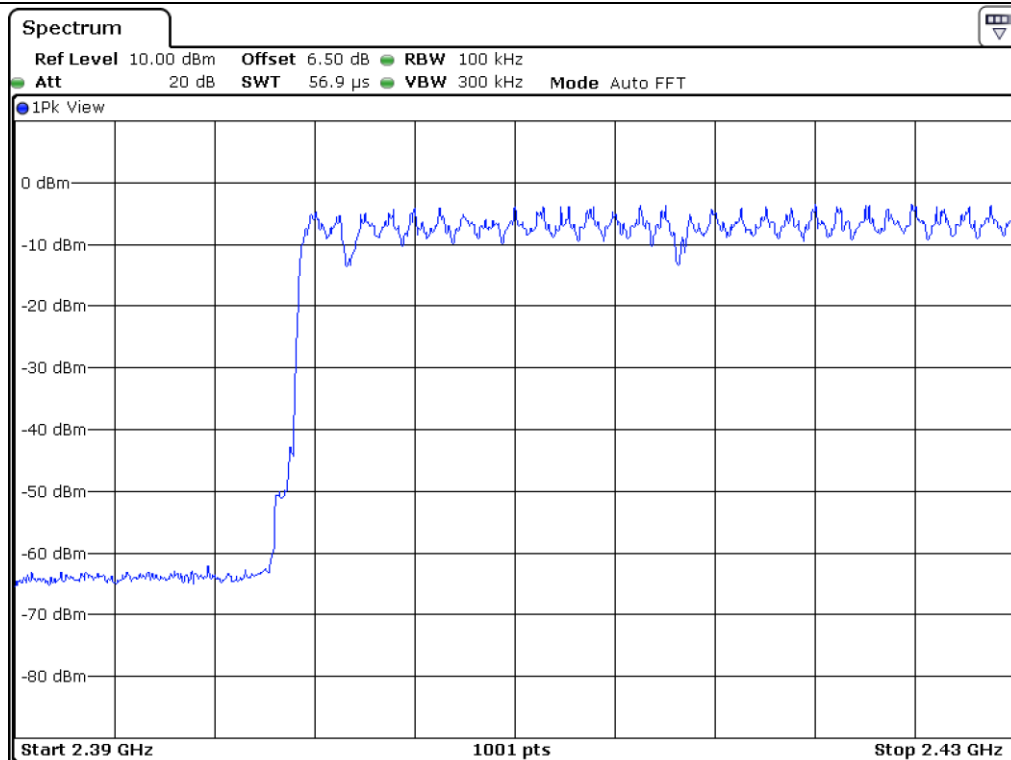

Number of hopping channel: 28

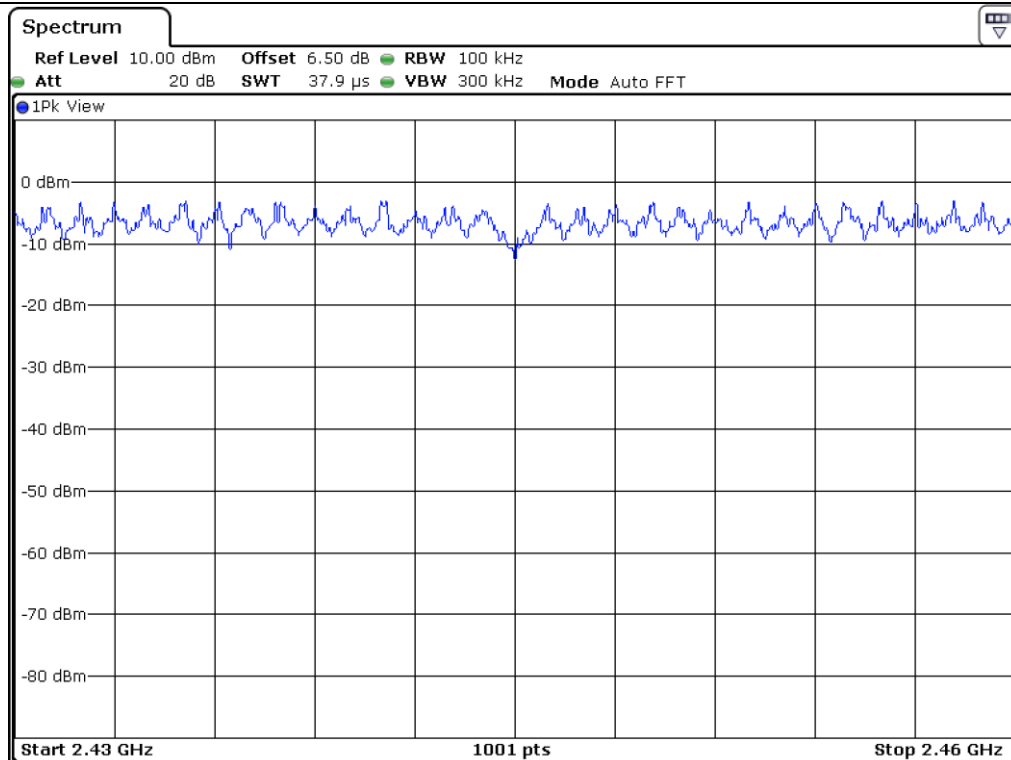

Number of hopping channel: 30

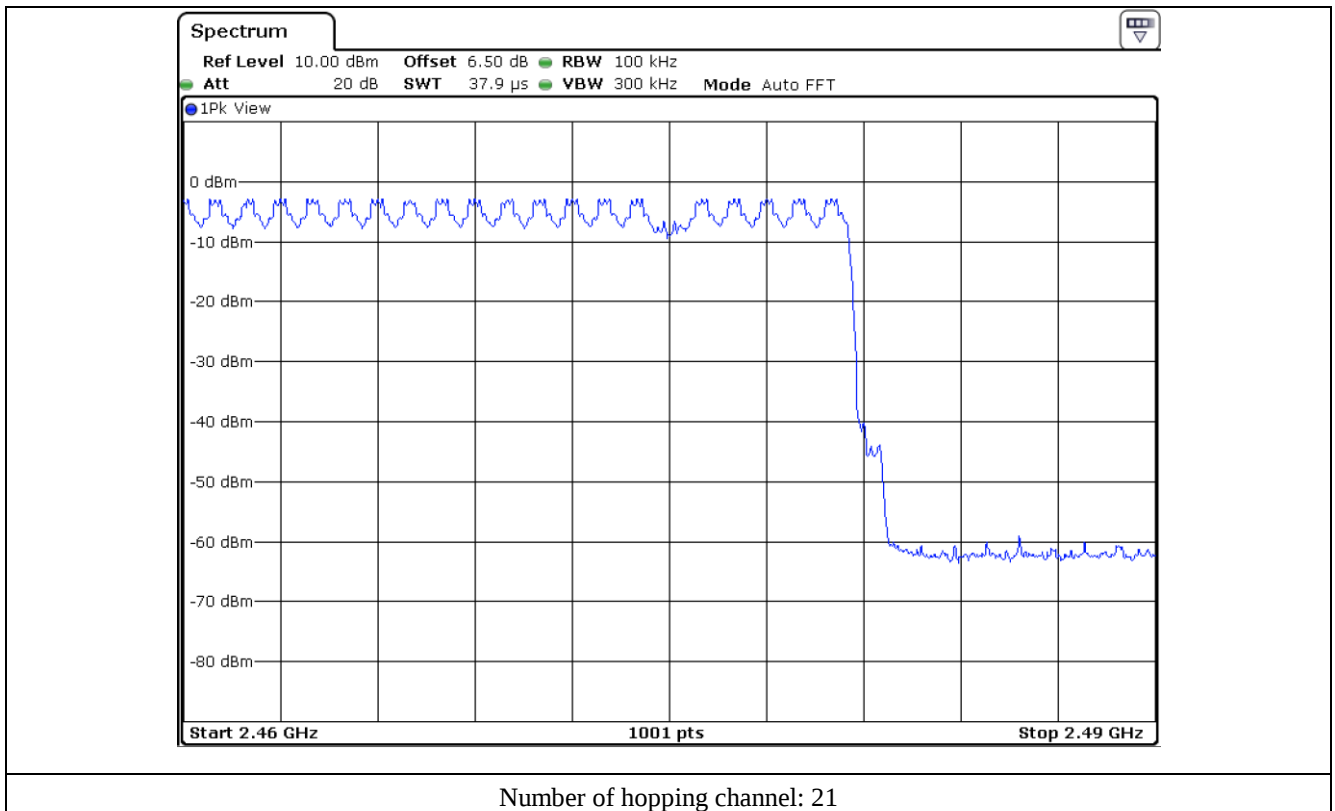

9.6 Test data for 3 Mbps


-. Test Date : May 23, 2019 ~ July 09, 2019


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64




Tested by: Sieon Lee / Assistant Manager

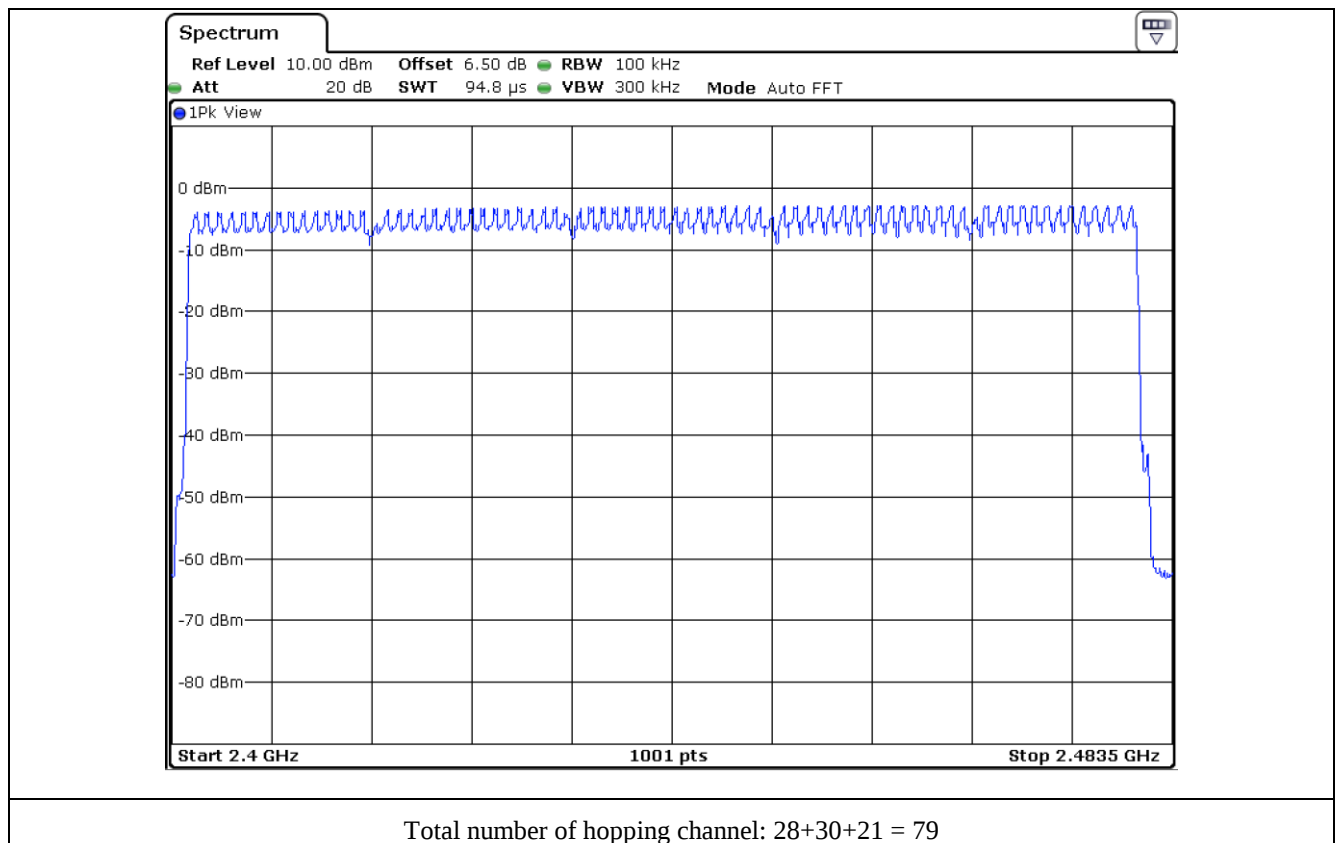


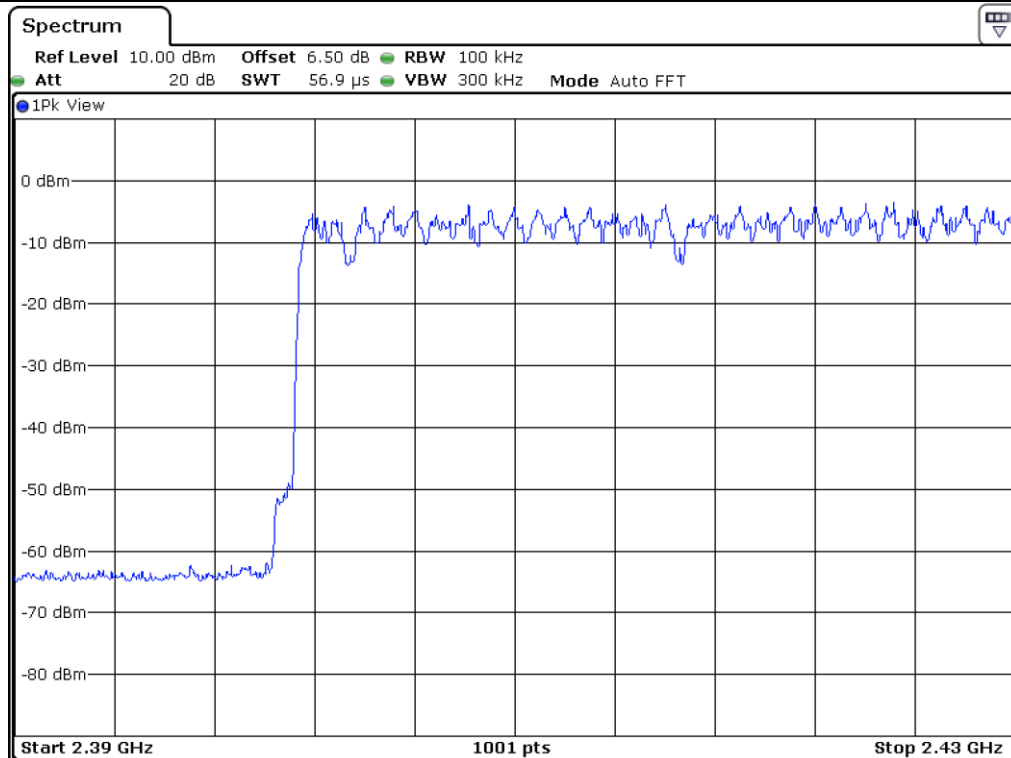

Number of hopping channel: 28

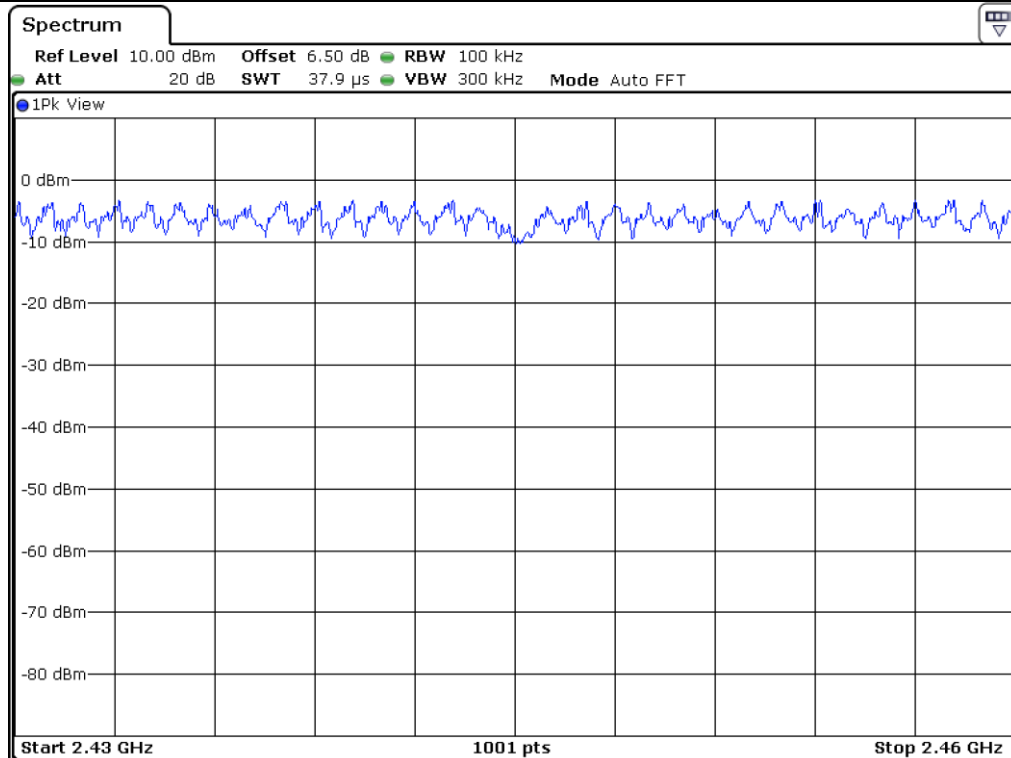

Number of hopping channel: 30

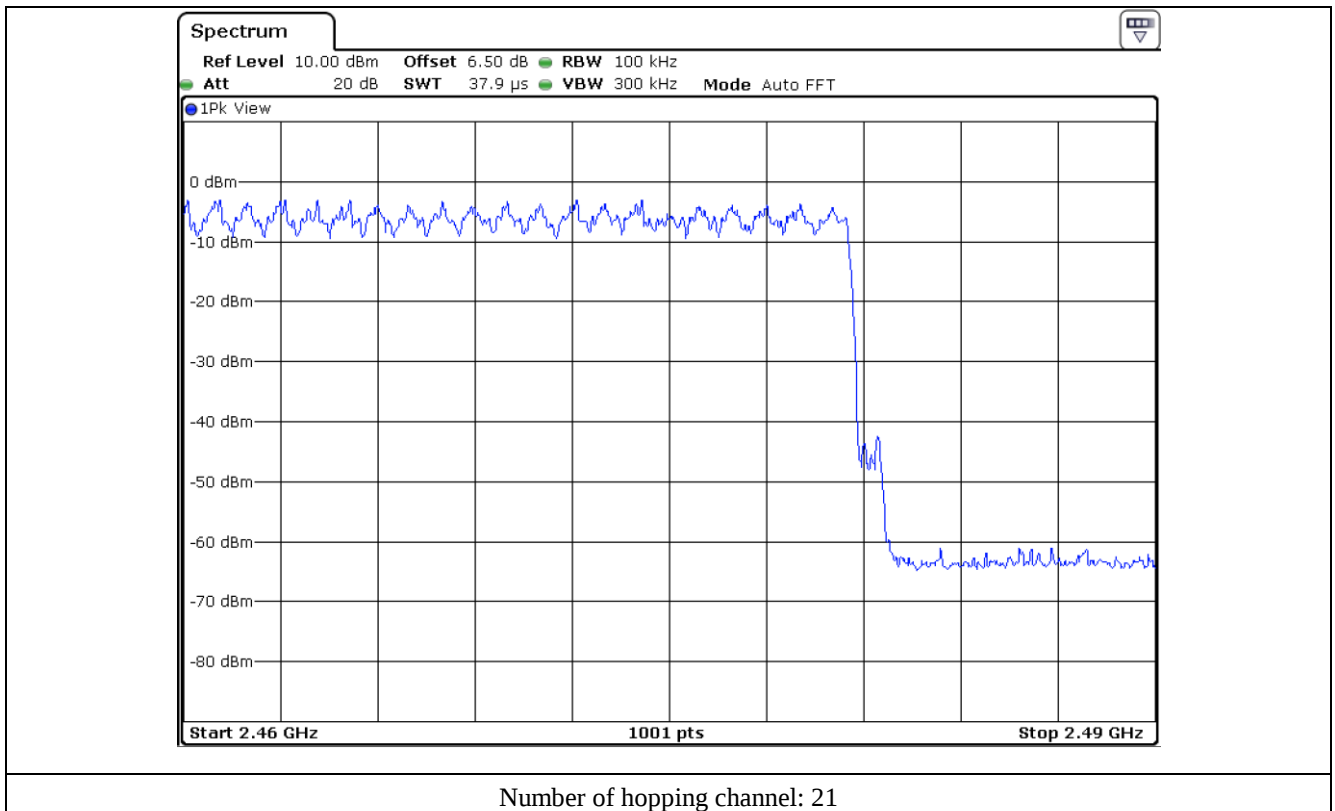


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

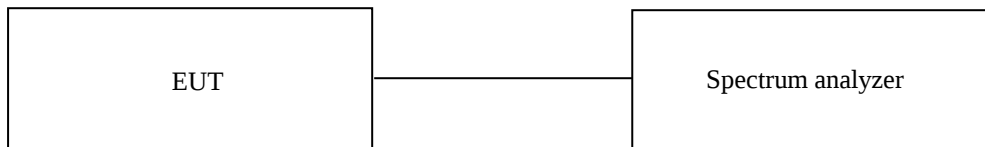

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 1 Mbps

-. Test Date : May 23, 2019 ~ July 09, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.380	10.13	31.6	121.64	400	PASS
DH3	1.640	5.060	31.6	262.23	400	
DH5	2.890	3.38	31.6	308.68	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Sieon Lee / Assistant Manager

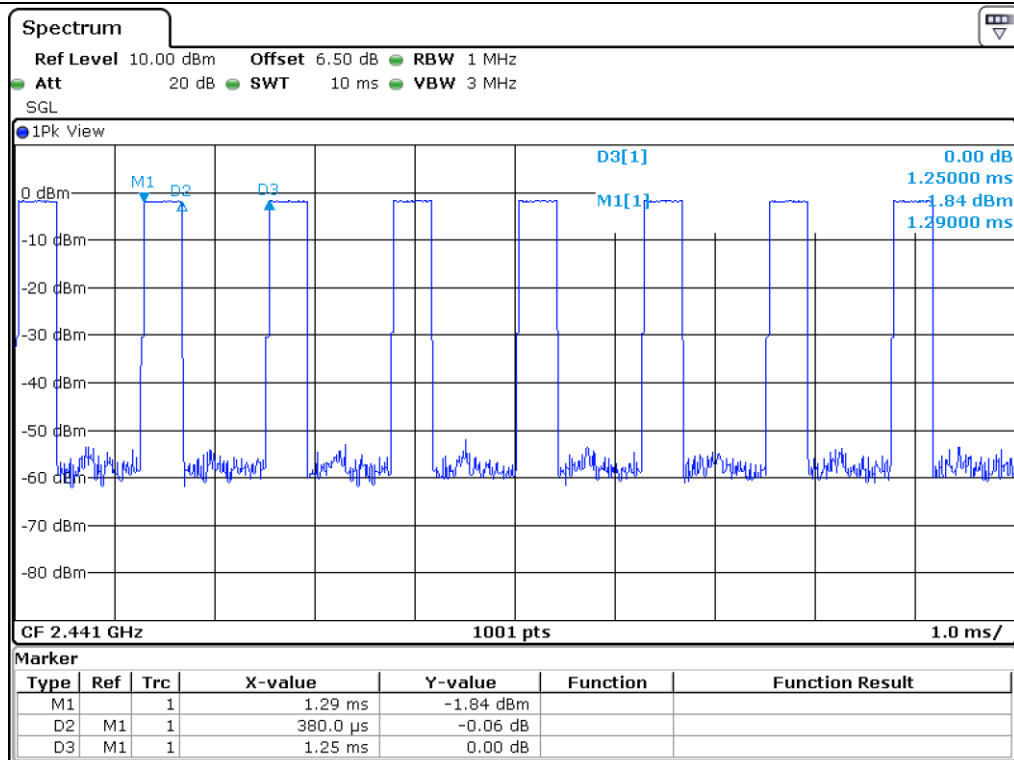

DH1

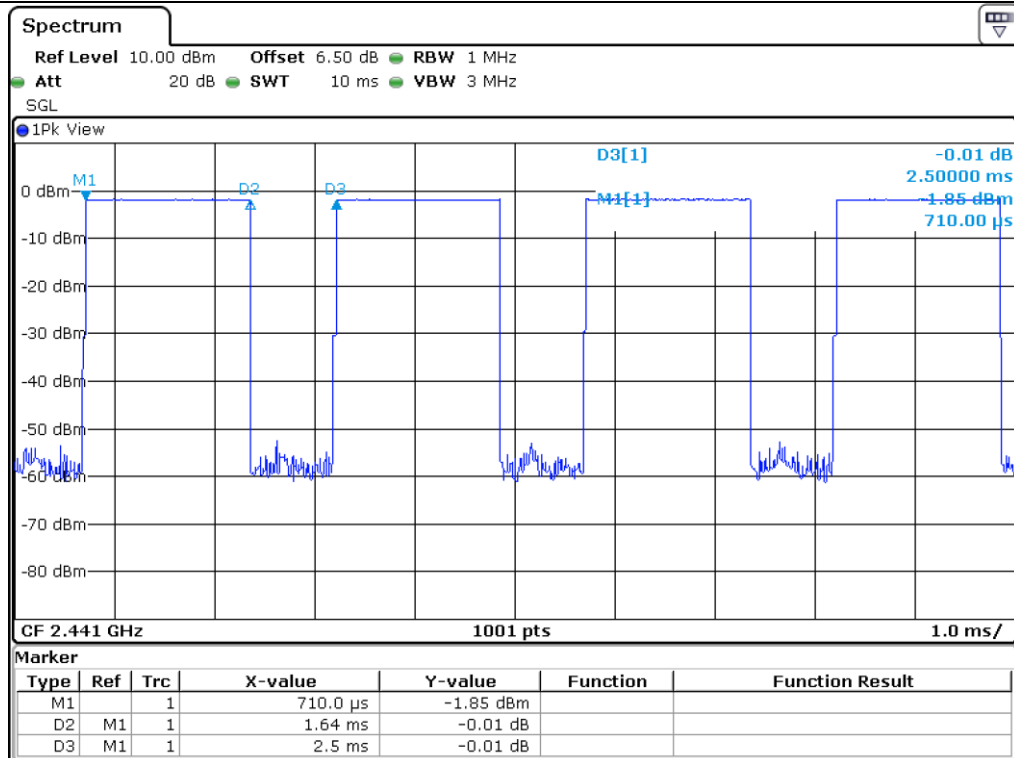

DH3

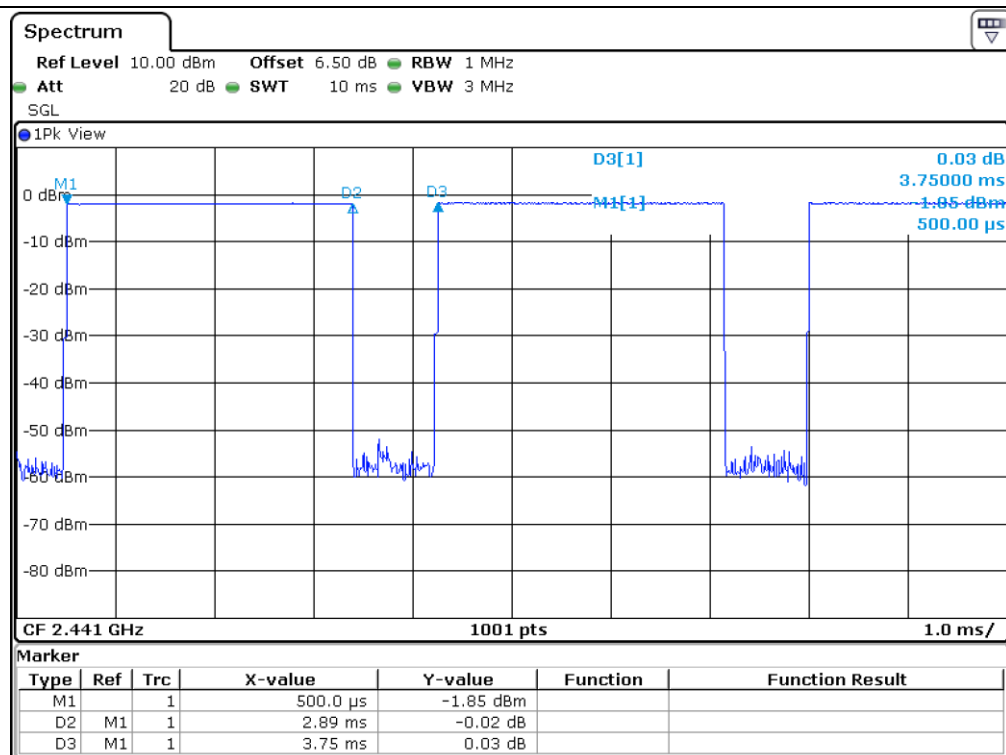

DH5

10.5 Test data for 2 Mbps

-. Test Date : May 23, 2019 ~ July 09, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For 2-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 2-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 2-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for 2-DH1, and 5.06 times ($= 1\,600/4/79$) for 2-DH3, and 3.38 times ($= 1\,600/6/79$) for 2-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
2-DH1	0.380	10.13	31.6	121.64	400	PASS
2-DH3	1.640	5.060	31.6	262.23	400	
2-DH5	2.890	3.38	31.6	308.68	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Sieon Lee / Assistant Manager

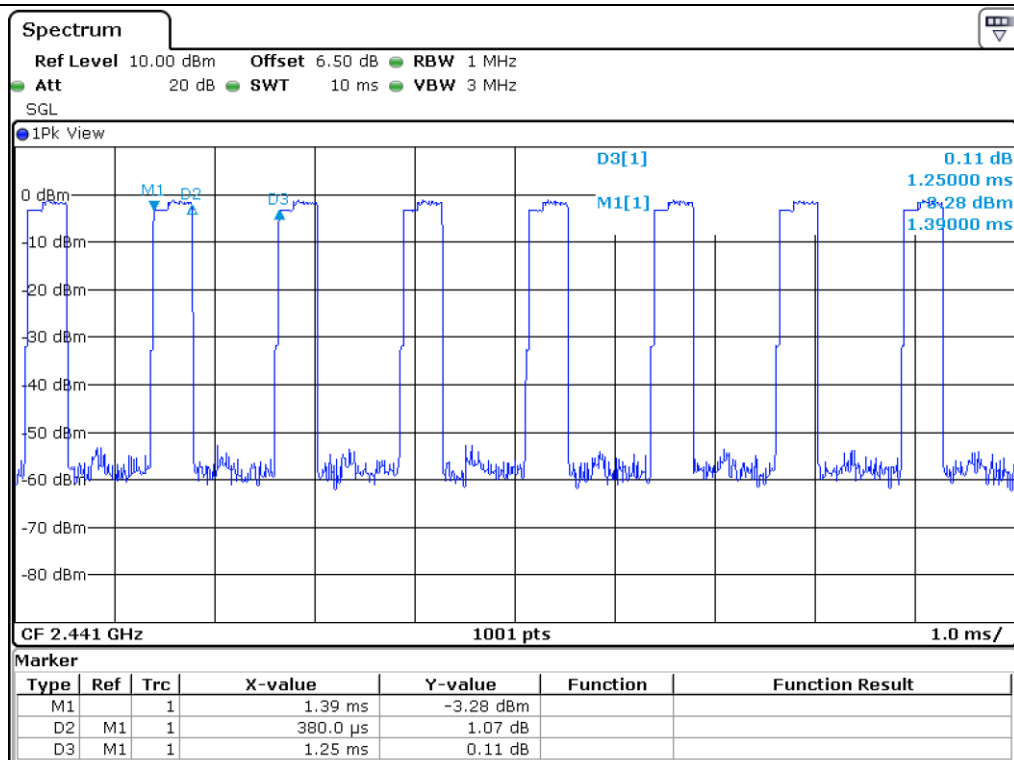

2-DH1

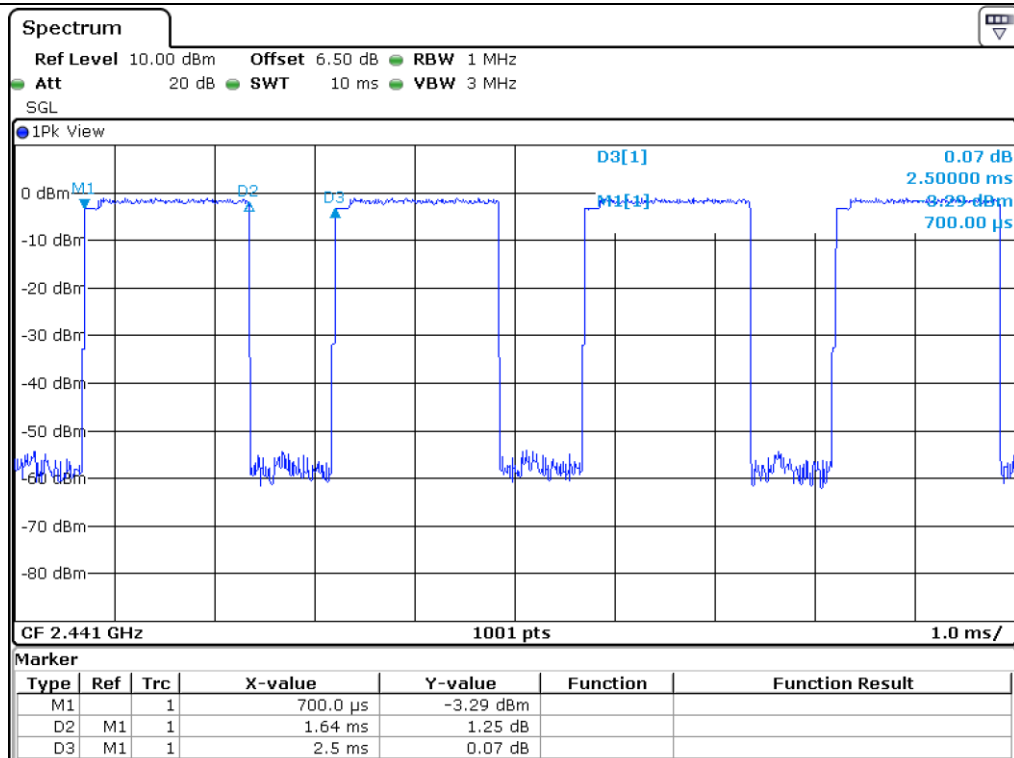

2-DH3

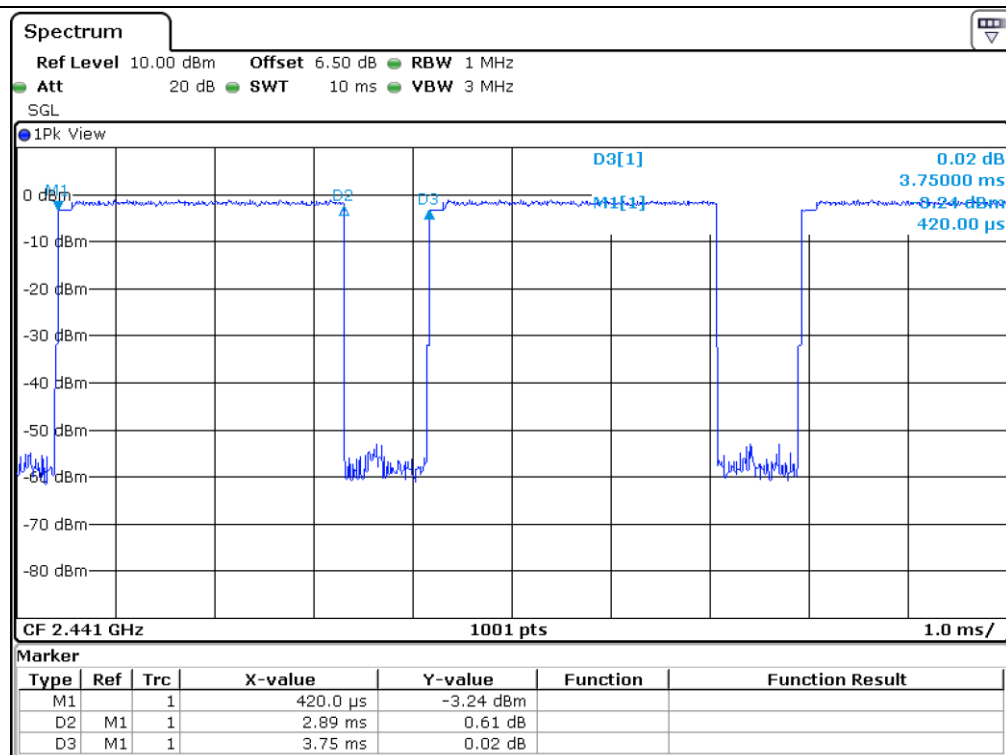

2-DH5

10.6 Test data for 3 Mbps

-. Test Date : May 23, 2019 ~ July 09, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For 3-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 3-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 3-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for 3-DH1, and 5.06 times ($= 1\,600/4/79$) for 3-DH3, and 3.38 times ($= 1\,600/6/79$) for 3-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
3-DH1	0.390	10.13	31.6	124.84	400	PASS
3-DH3	1.640	5.060	31.6	262.23	400	
3-DH5	2.900	3.38	31.6	309.74	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Sieon Lee / Assistant Manager

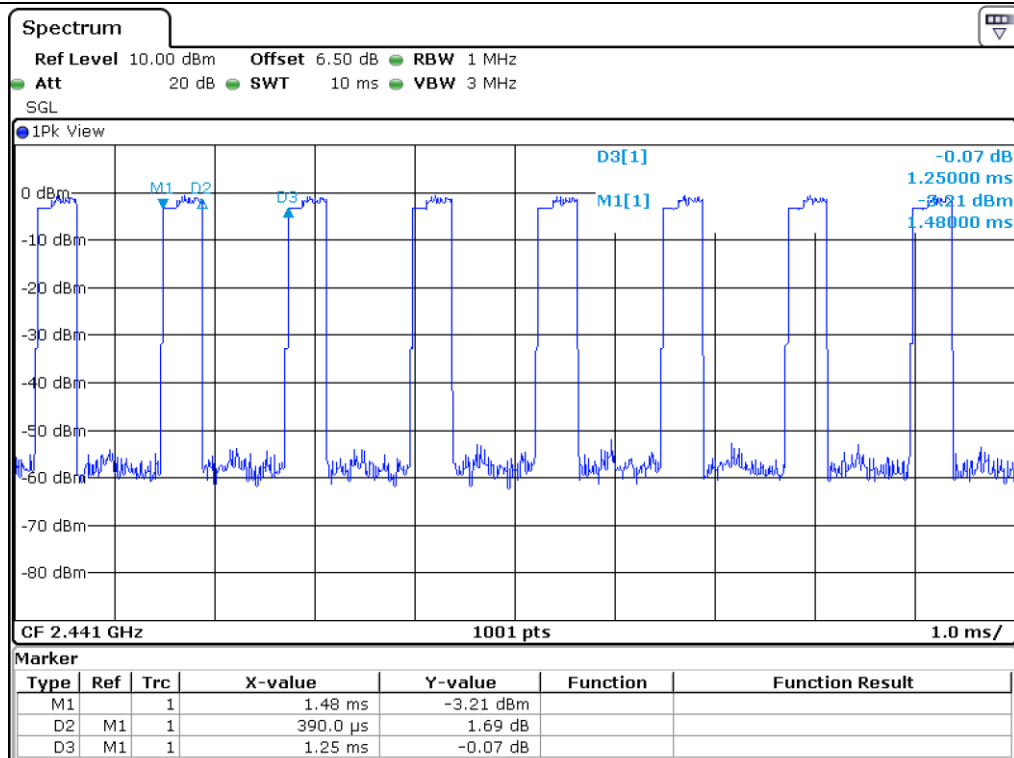

3-DH1

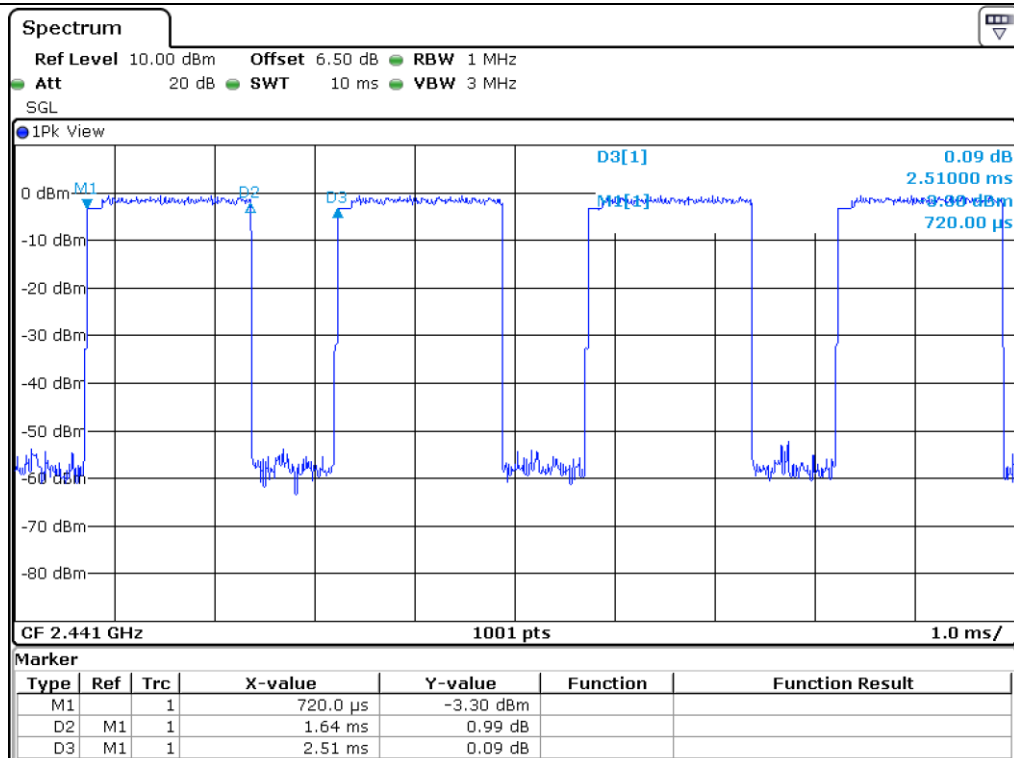

3-DH3

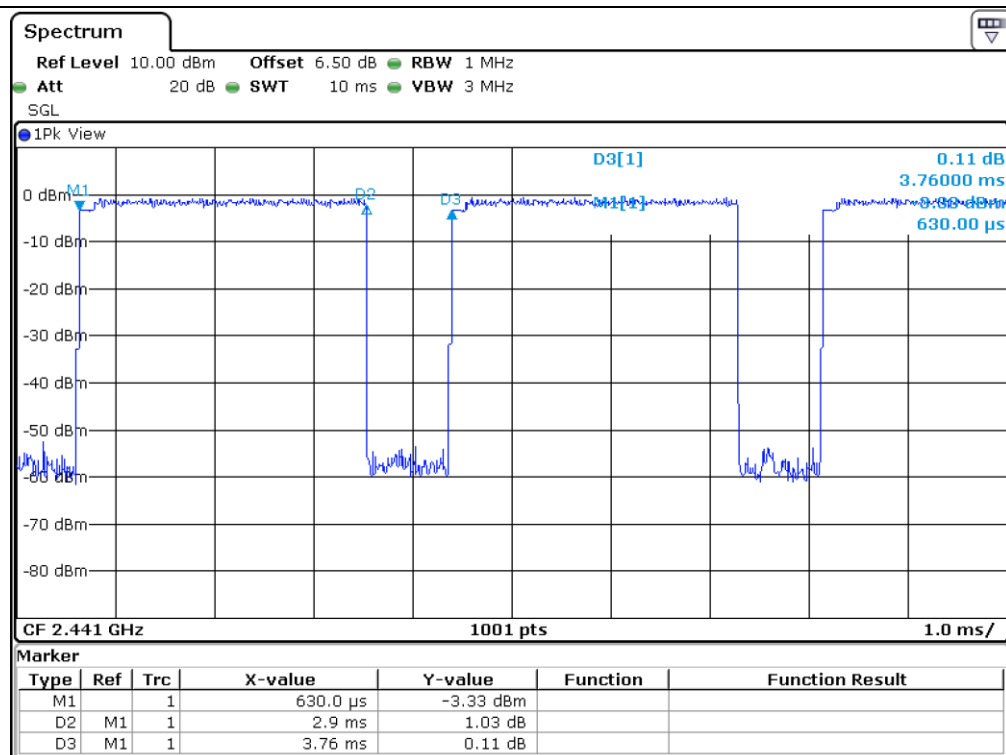

3-DH5


11. MAXIMUM PEAK OUTPUT POWER

11.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H

11.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT.
The EUT was operating in transmit mode at the appropriate center frequency.

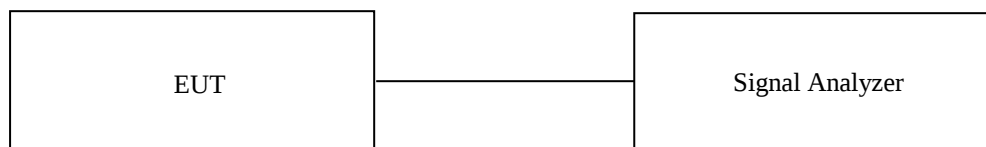

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for 1 Mbps

-. Test Date : May 23, 2019 ~ July 09, 2019


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-2.58	21.00	23.58
MIDDLE	2 441	-1.70	21.00	22.70
HIGH	2 480	-1.56	21.00	22.56


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Sieon Lee / Assistant Manager

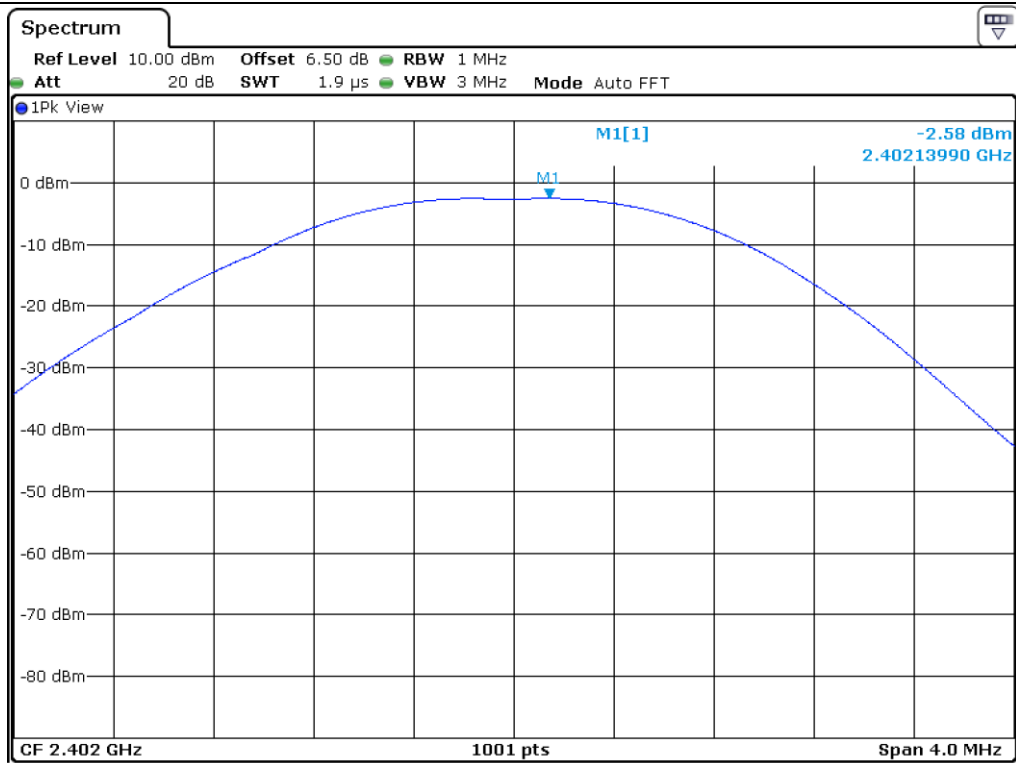

Low Channel

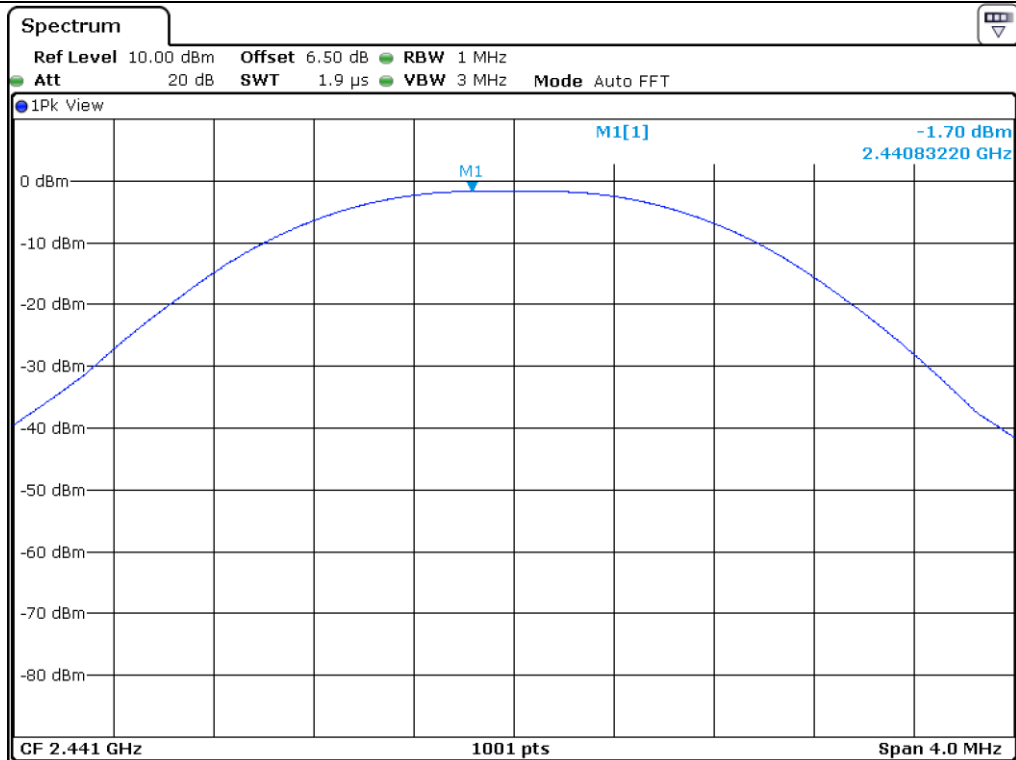

Middle Channel

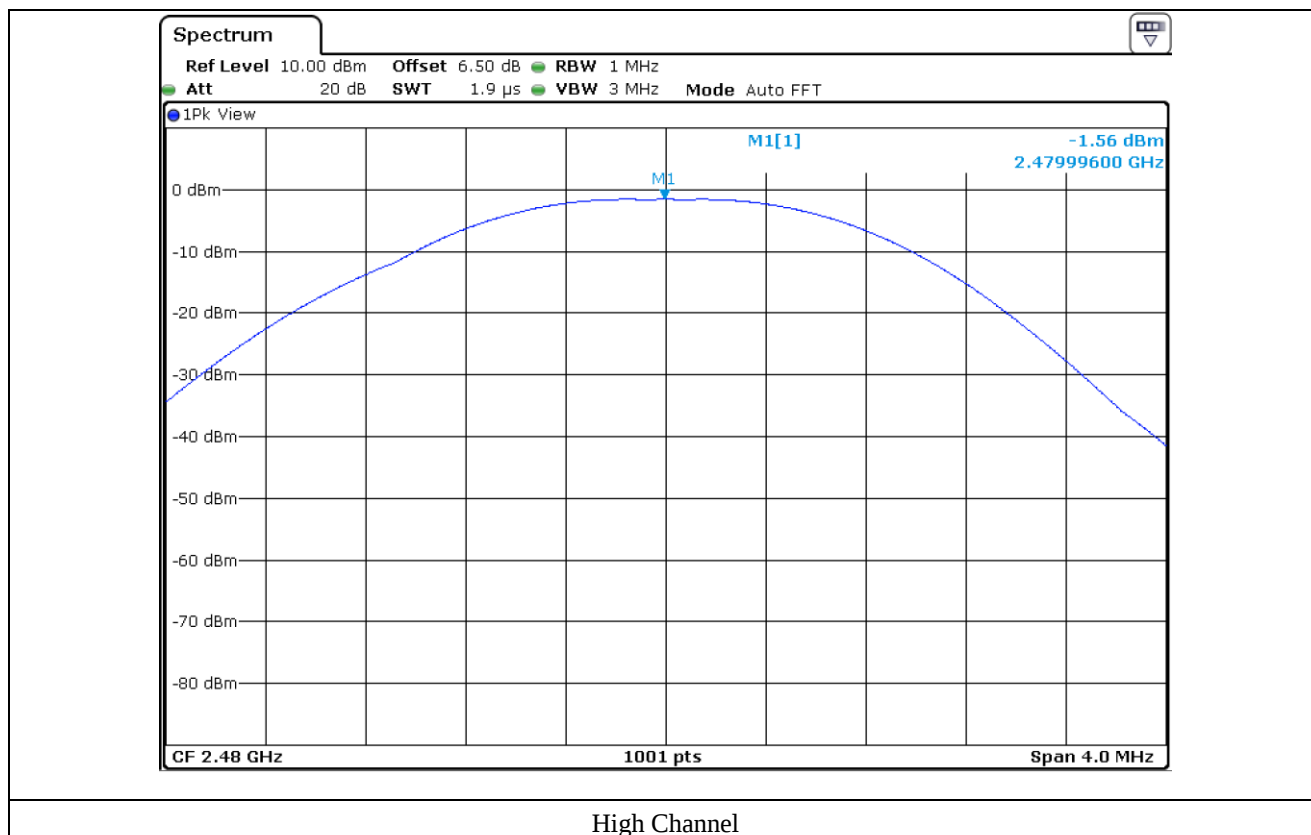

11.5 Test data for 2 Mbps

-. Test Date : May 23, 2019 ~ July 09, 2019


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-2.02	21.00	23.02
MIDDLE	2 441	-1.10	21.00	22.10
HIGH	2 480	-0.88	21.00	21.88


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Sieon Lee / Assistant Manager

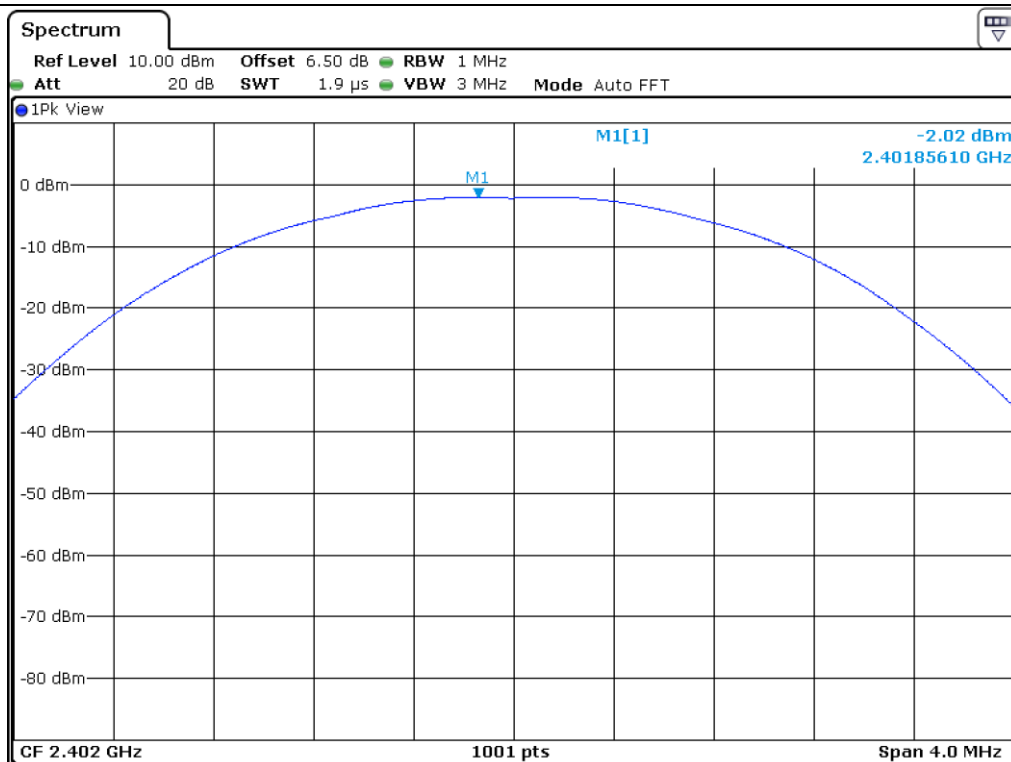

Low Channel

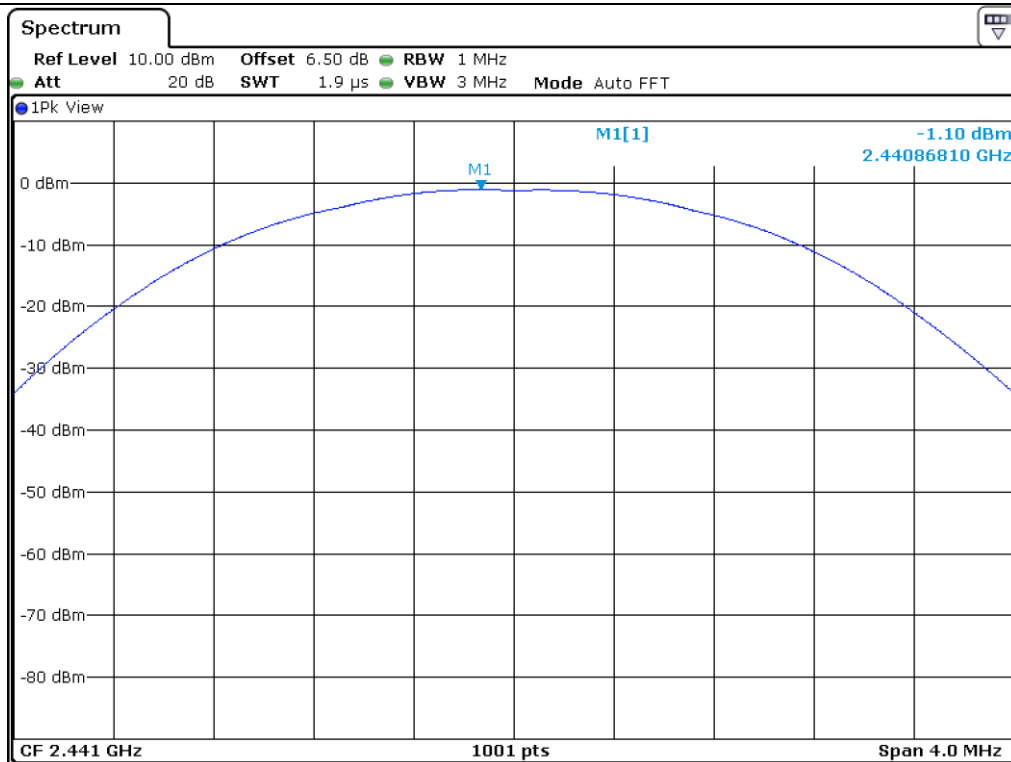

Middle Channel

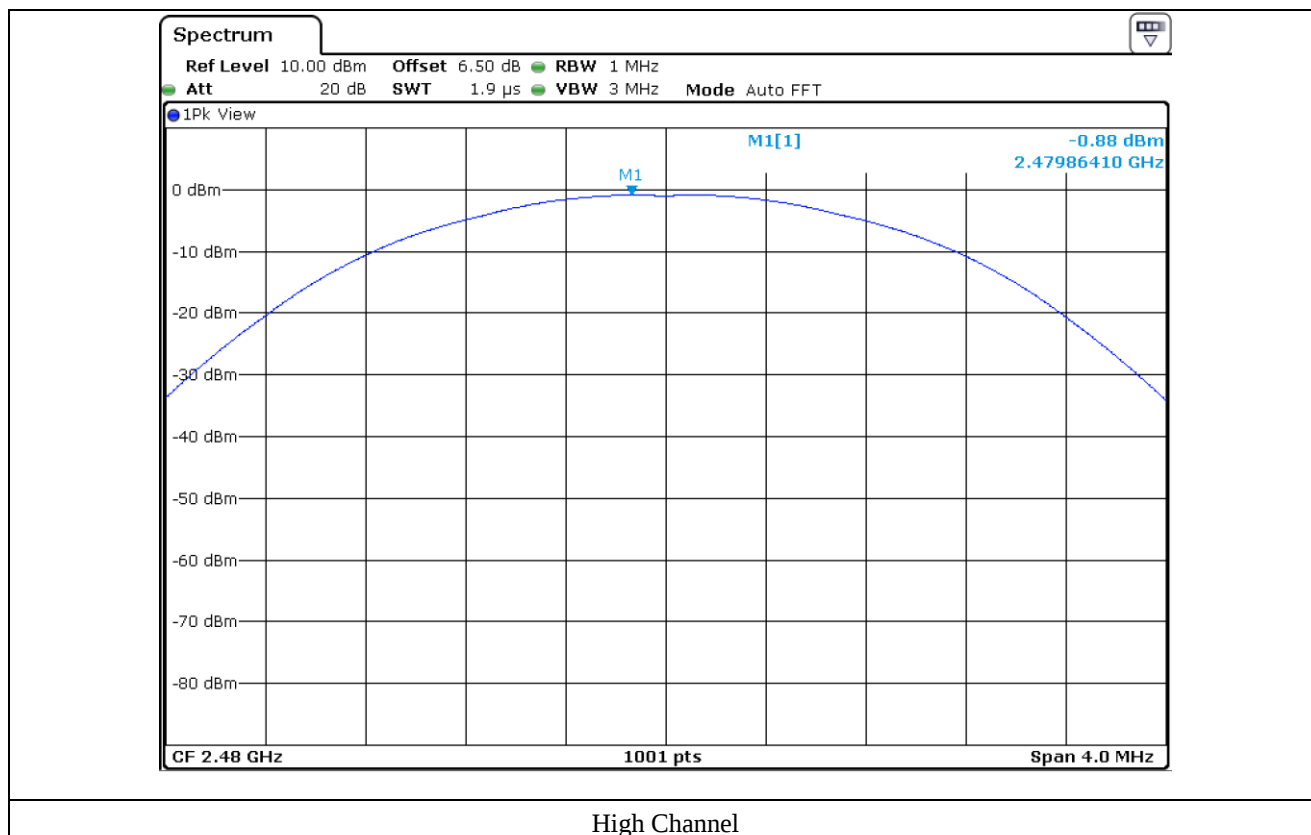

11.6 Test data for 3 Mbps

-. Test Date : May 23, 2019 ~ July 09, 2019


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-1.62	21.00	22.62
MIDDLE	2 441	-0.70	21.00	21.70
HIGH	2 480	-0.54	21.00	21.54


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Sieon Lee / Assistant Manager

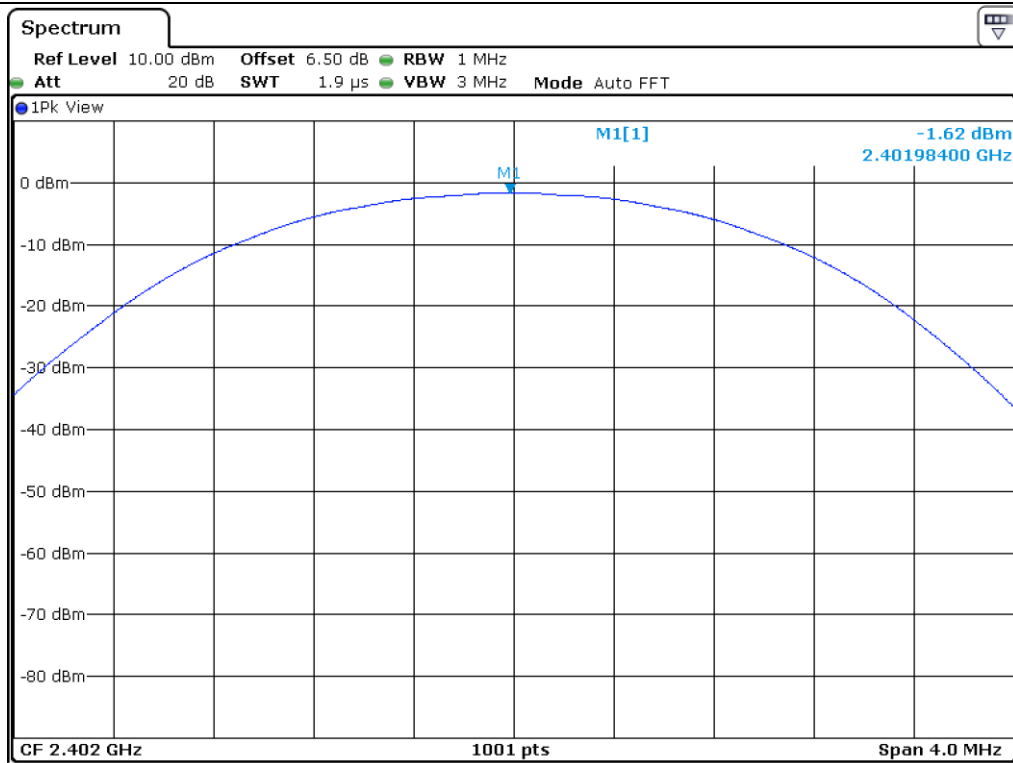

Low Channel

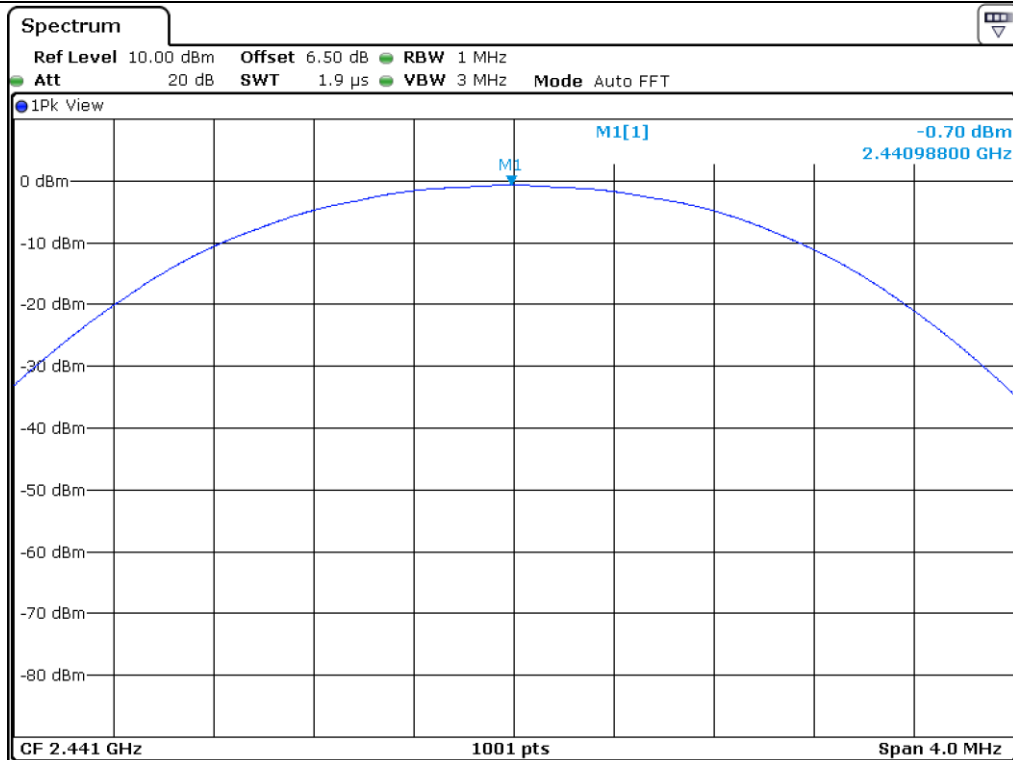

Middle Channel

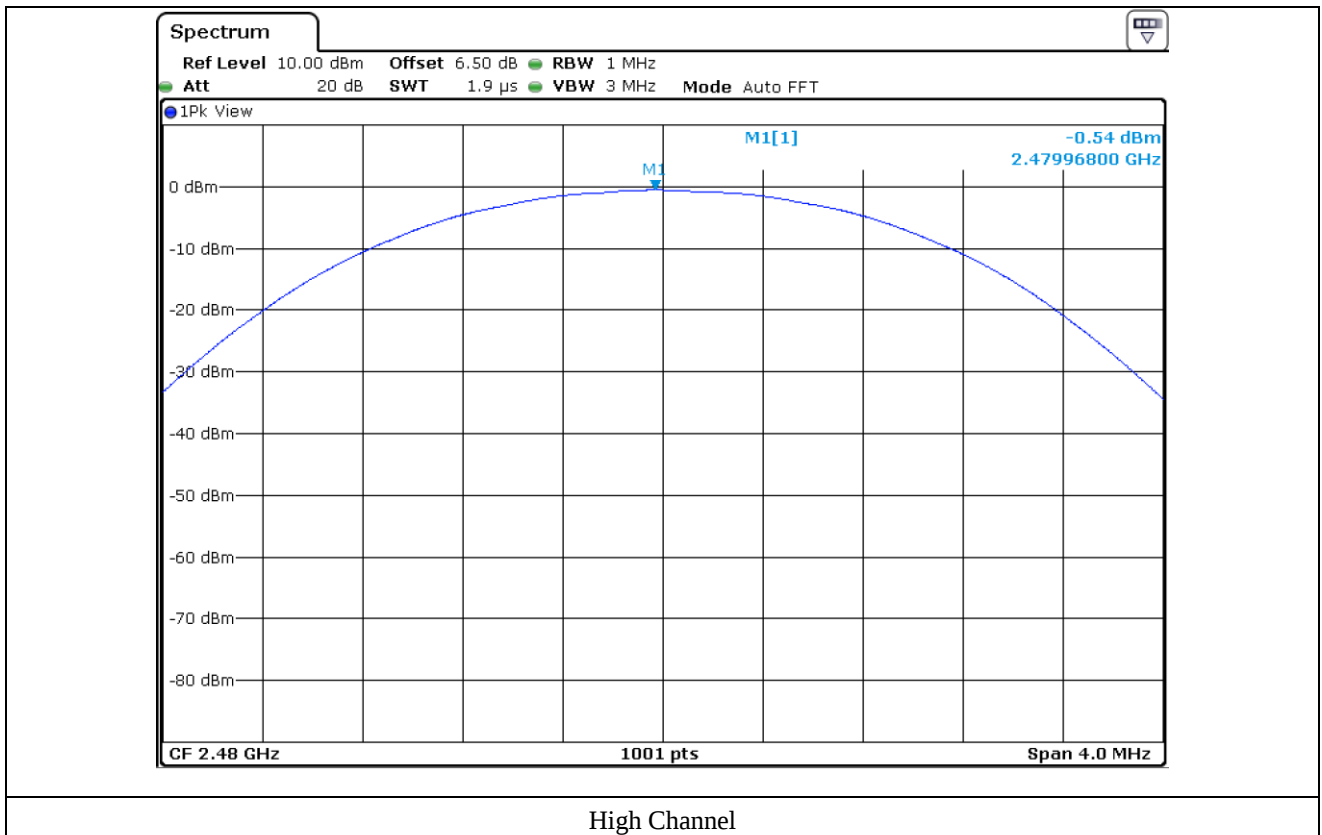


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 24 °C
Relative humidity : 48 % R.H

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

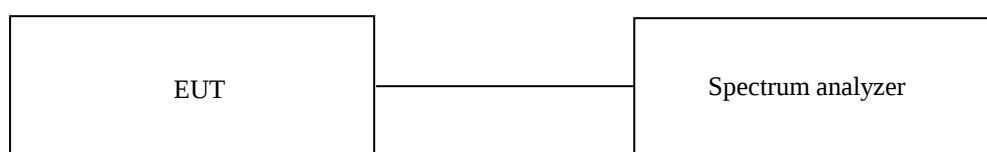

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
☐ -	ESCI	Rohde & Schwarz	EMI Test Receiver	101013	Mar. 19, 2019 (1Y)
☒ -	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 22, 2018 (1Y)
☒ -	310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 18, 2019 (1Y)
☐ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)
☒ -	BBV 9718 B	Schwarzbeck	Broadband Pre-Amplifier	009	Mar. 20, 2019 (1Y)
☒ -	MA240	HD GmbH	Antenna Master	N/A	N/A
☐ -	HD100	HD GmbH	Position Controller	N/A	N/A
☒ -	DS420S	HD GmbH	Turn Table	N/A	N/A
☐ -	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	May. 13, 2018 (2Y)
☒ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	Jun. 05, 2018 (2Y)
☒ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)
☐ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Dec. 04, 2017 (2Y)
☐ -	83051A	Agilent	Microwave System Preamplifier	3950M00201	Mar. 12, 2019 (1Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

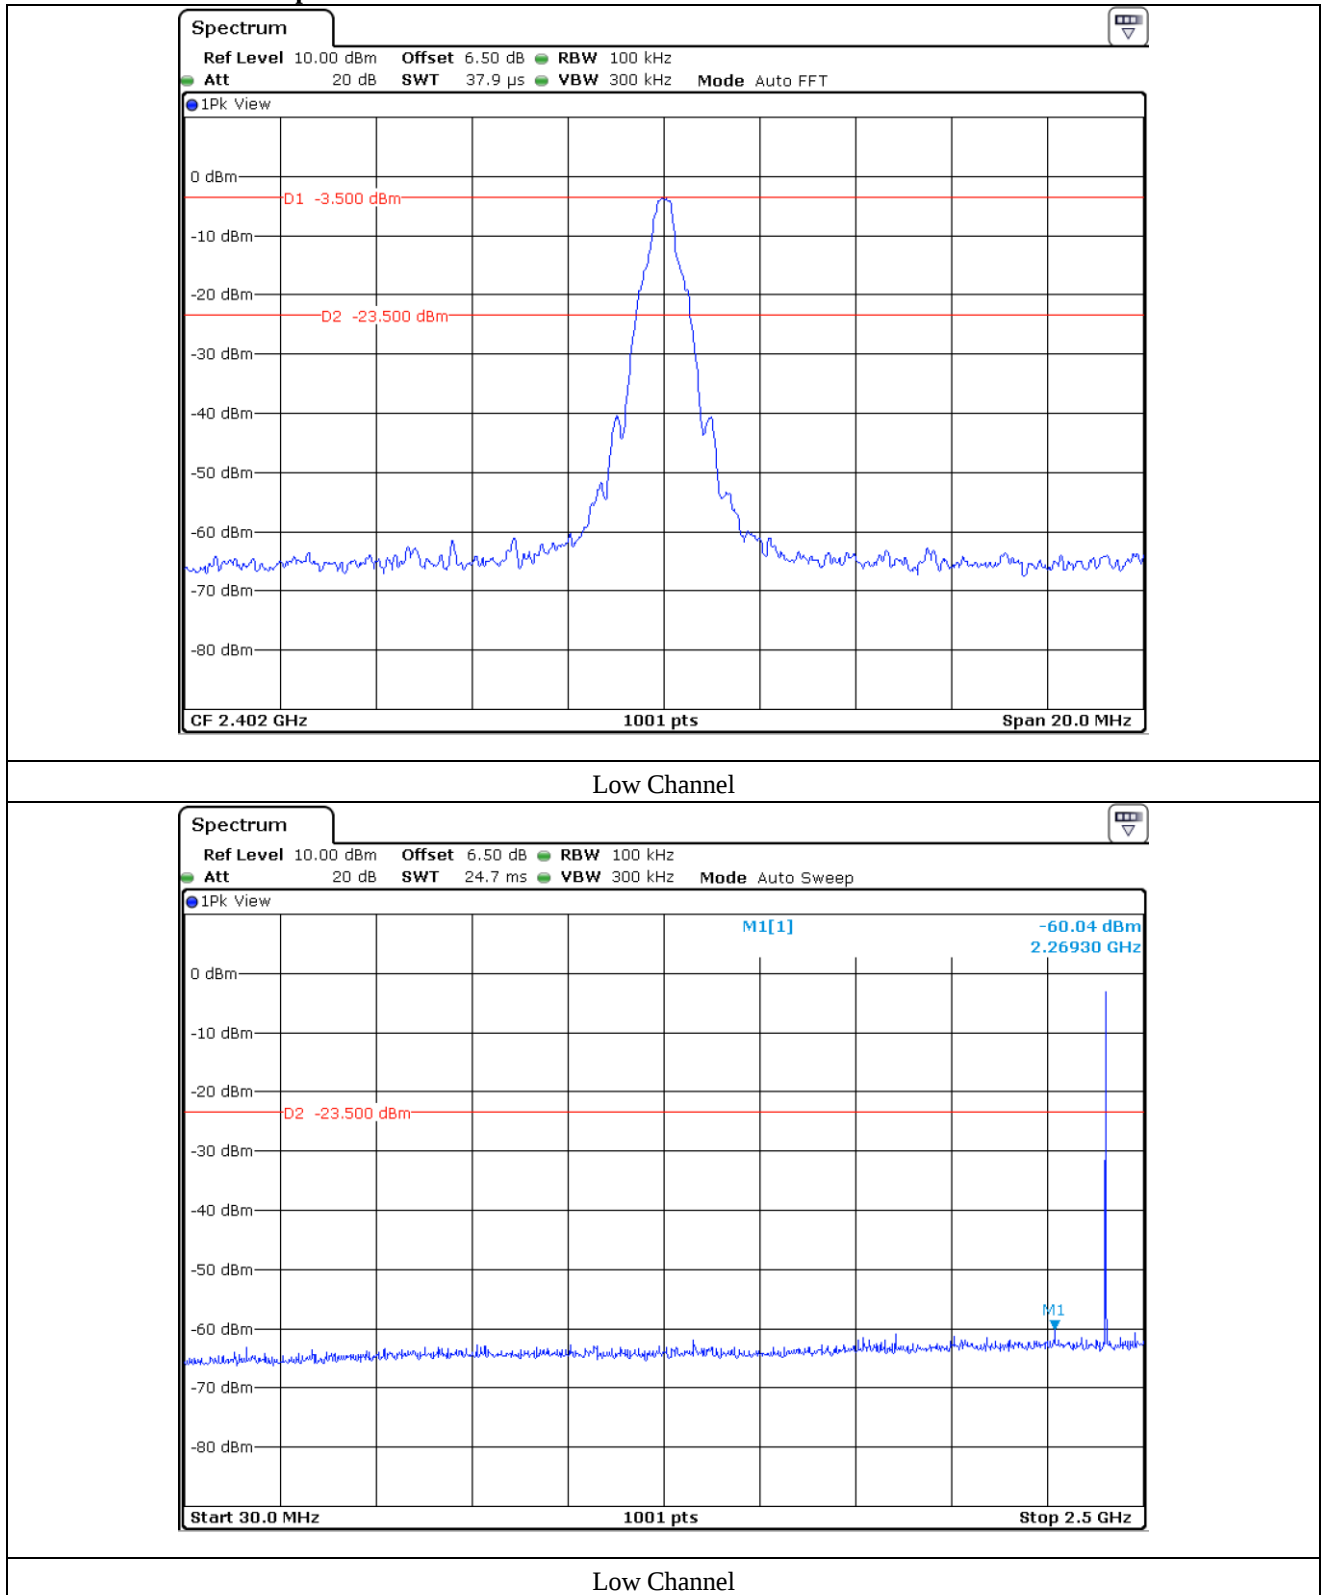

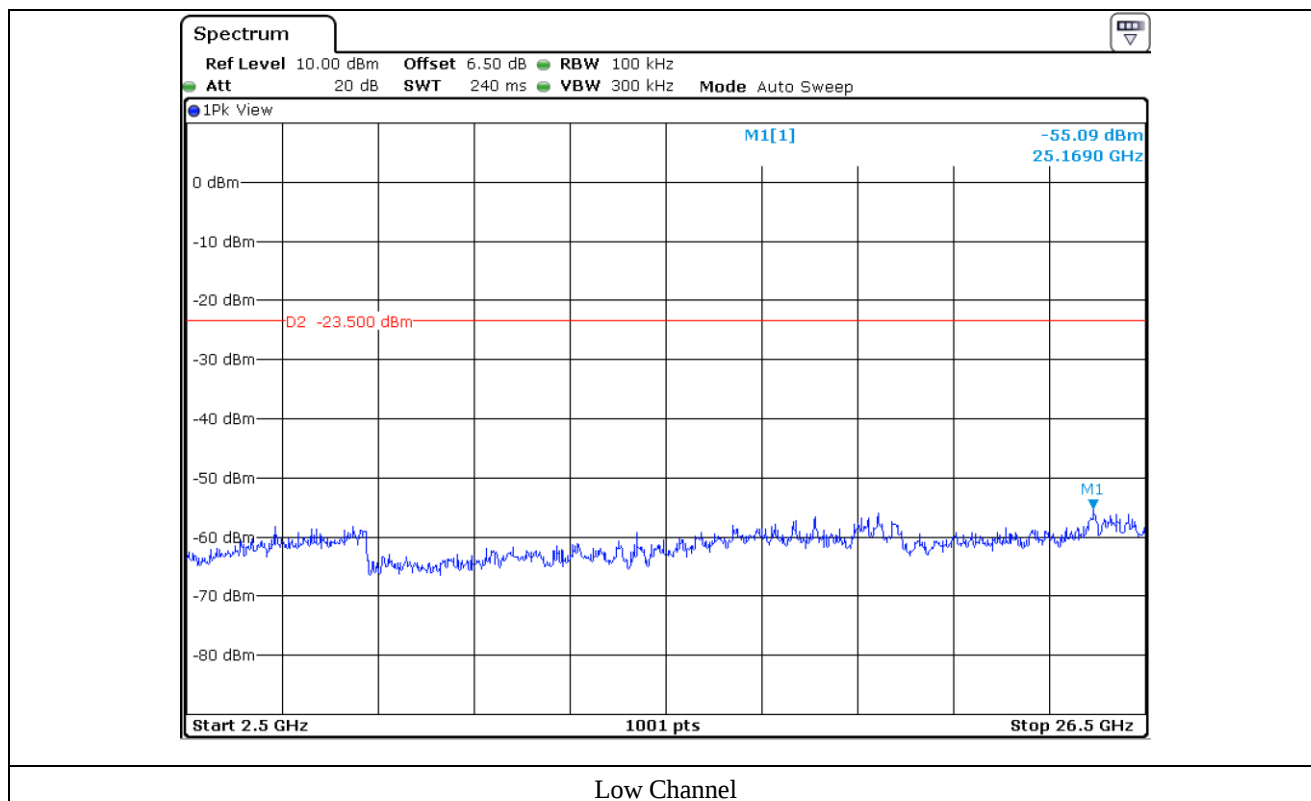


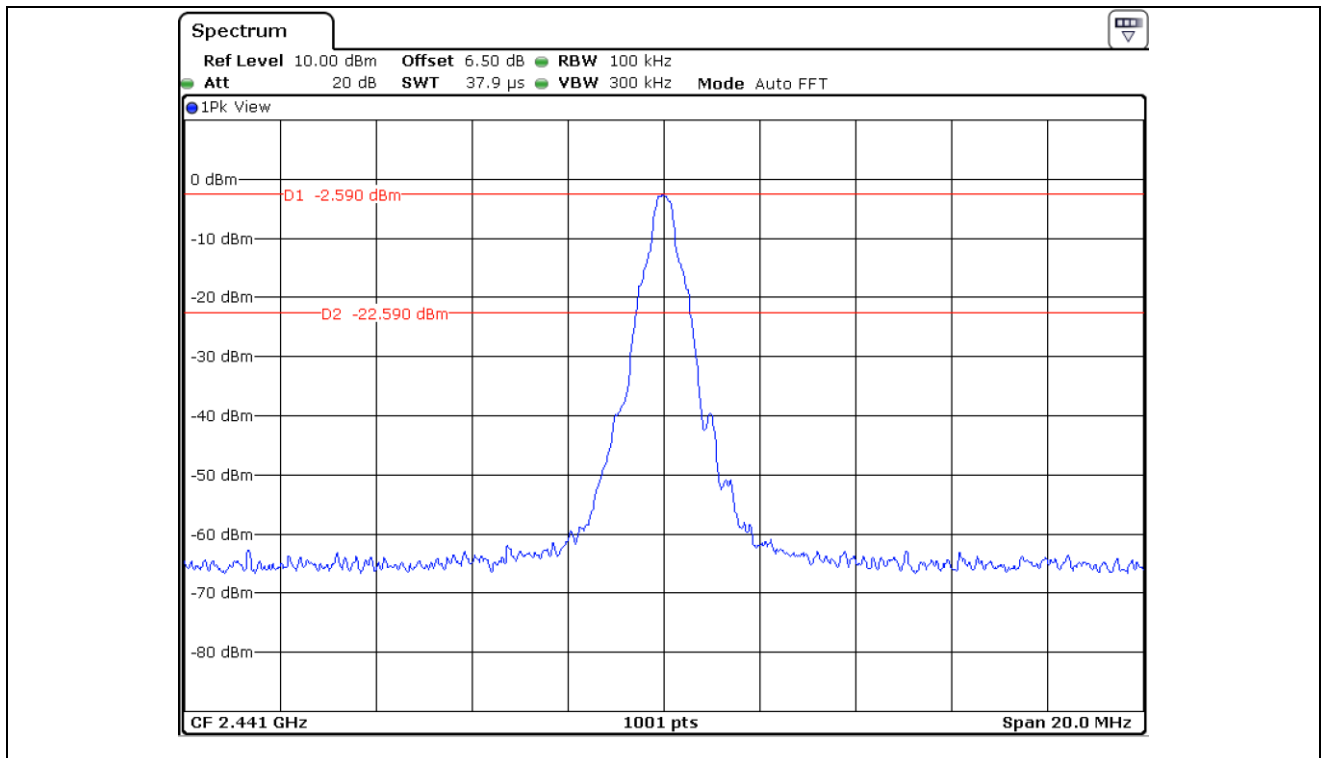


Middle Channel

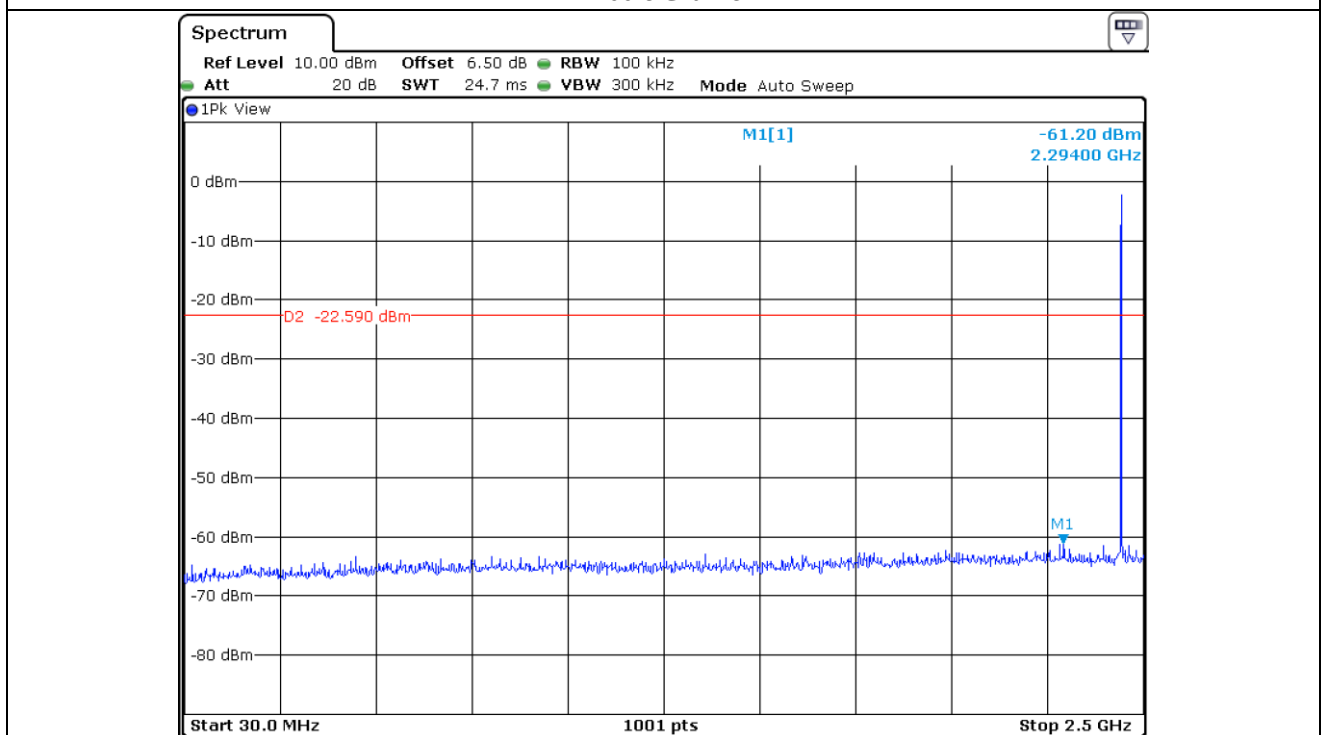


Middle Channel

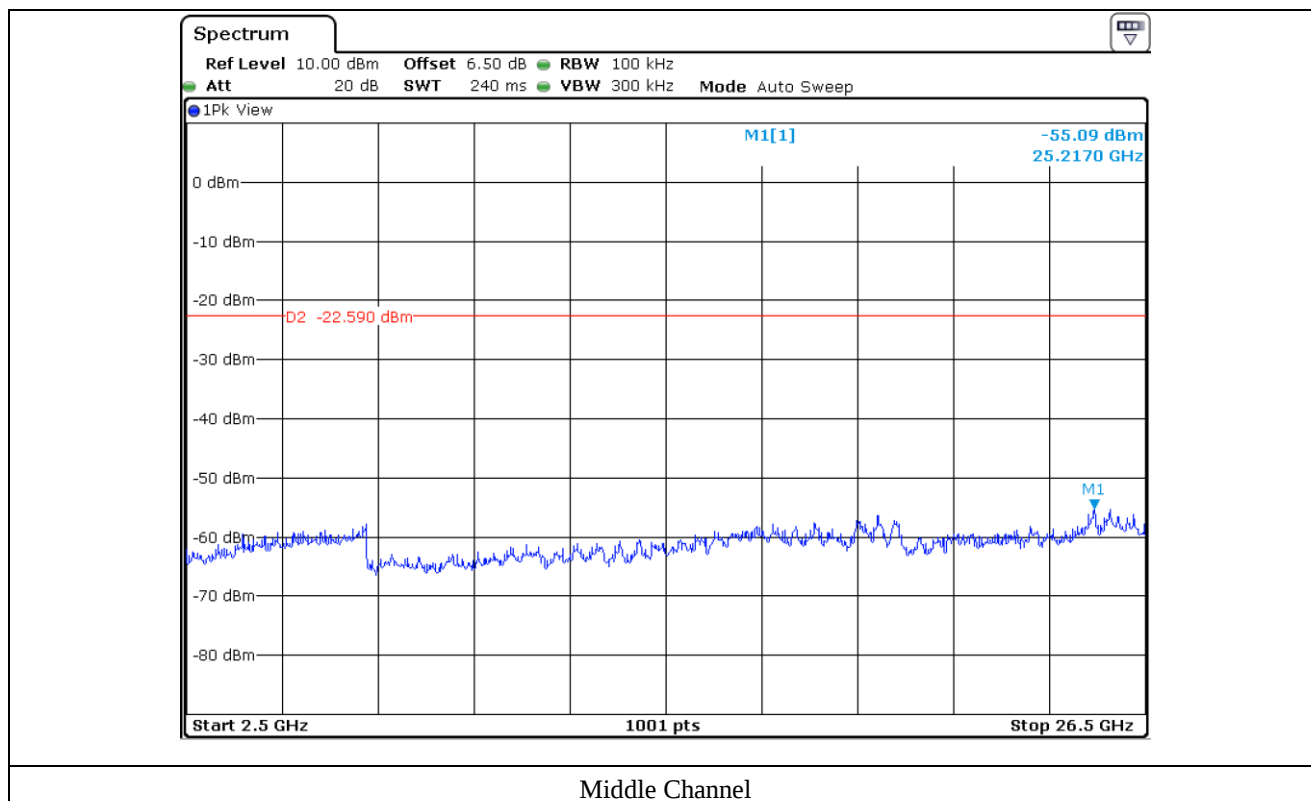


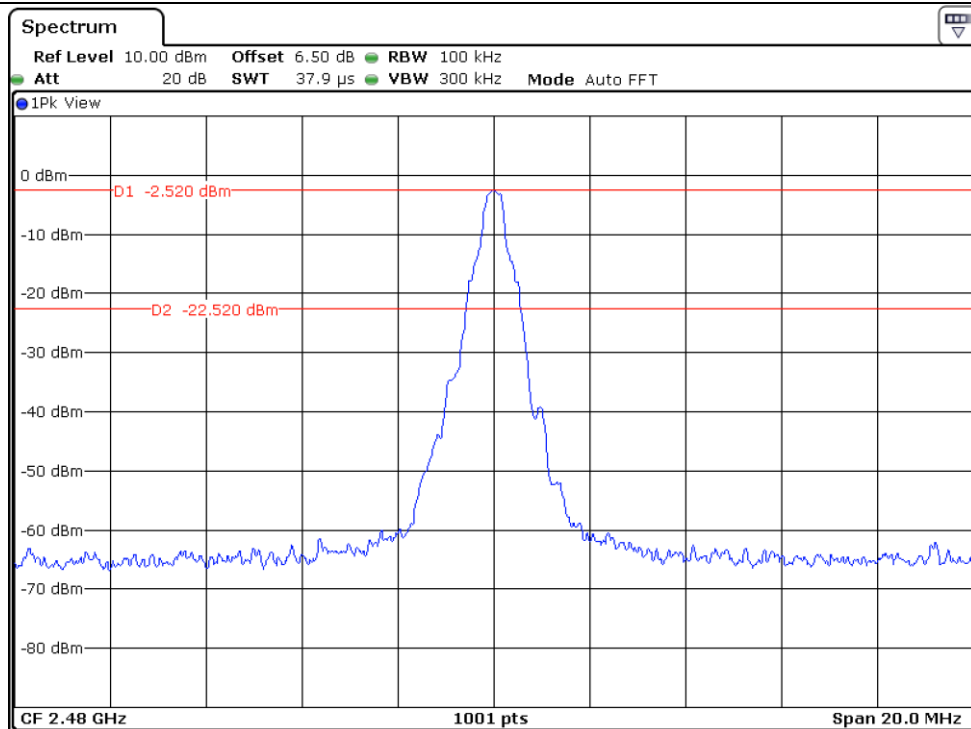


High Channel

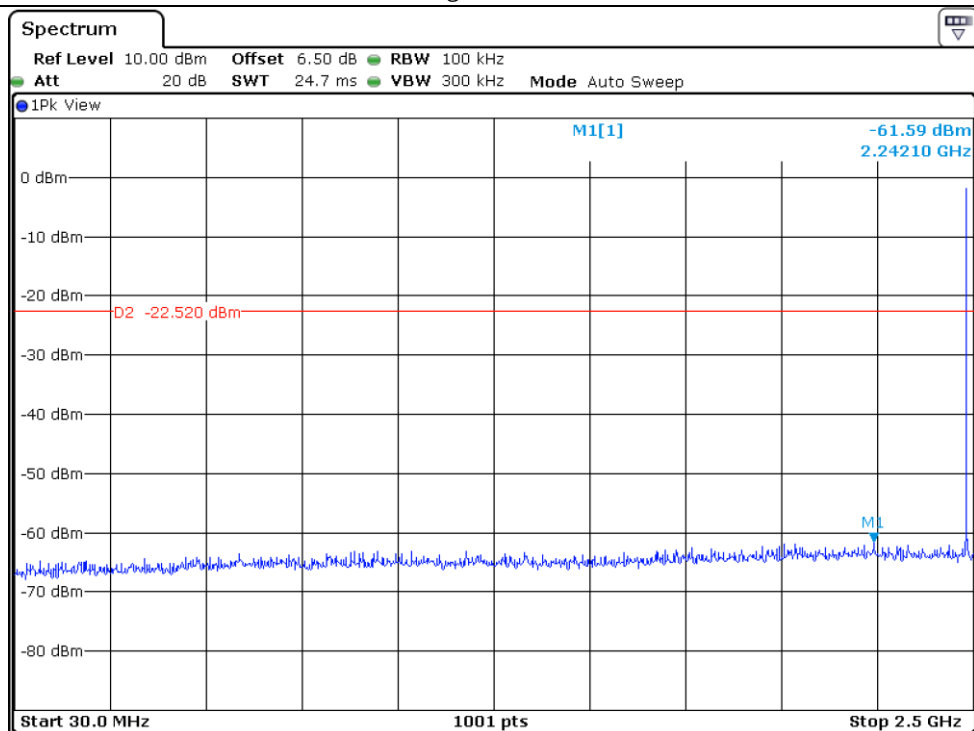



High Channel

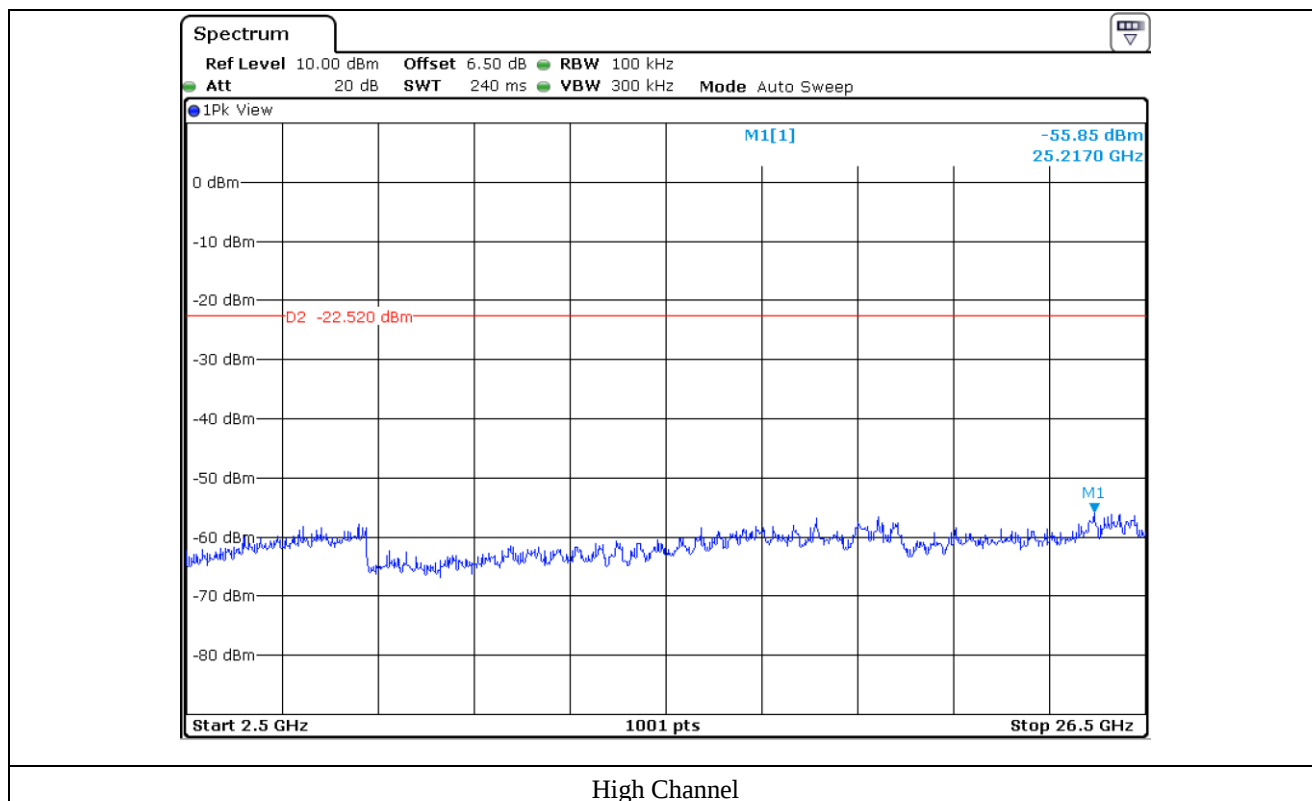


12.5.2 Test data for 2 Mbps

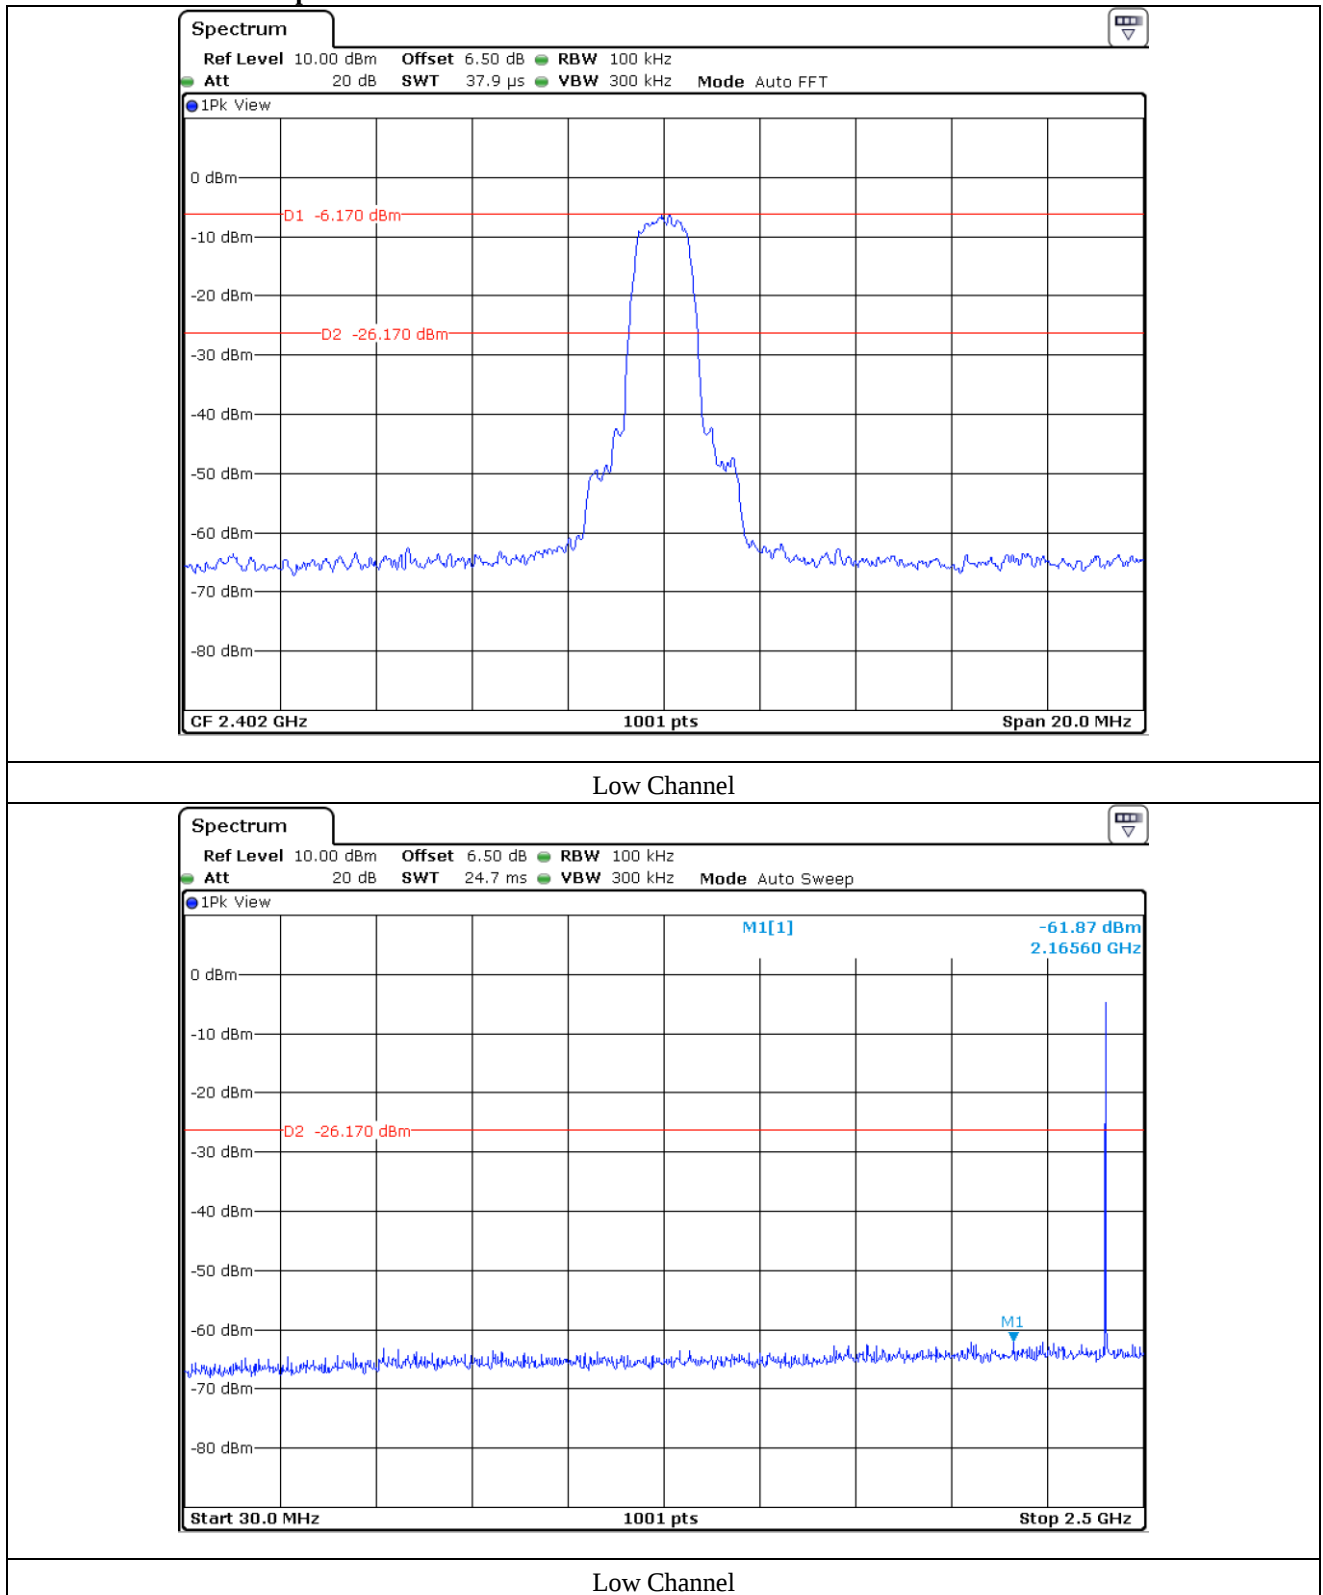

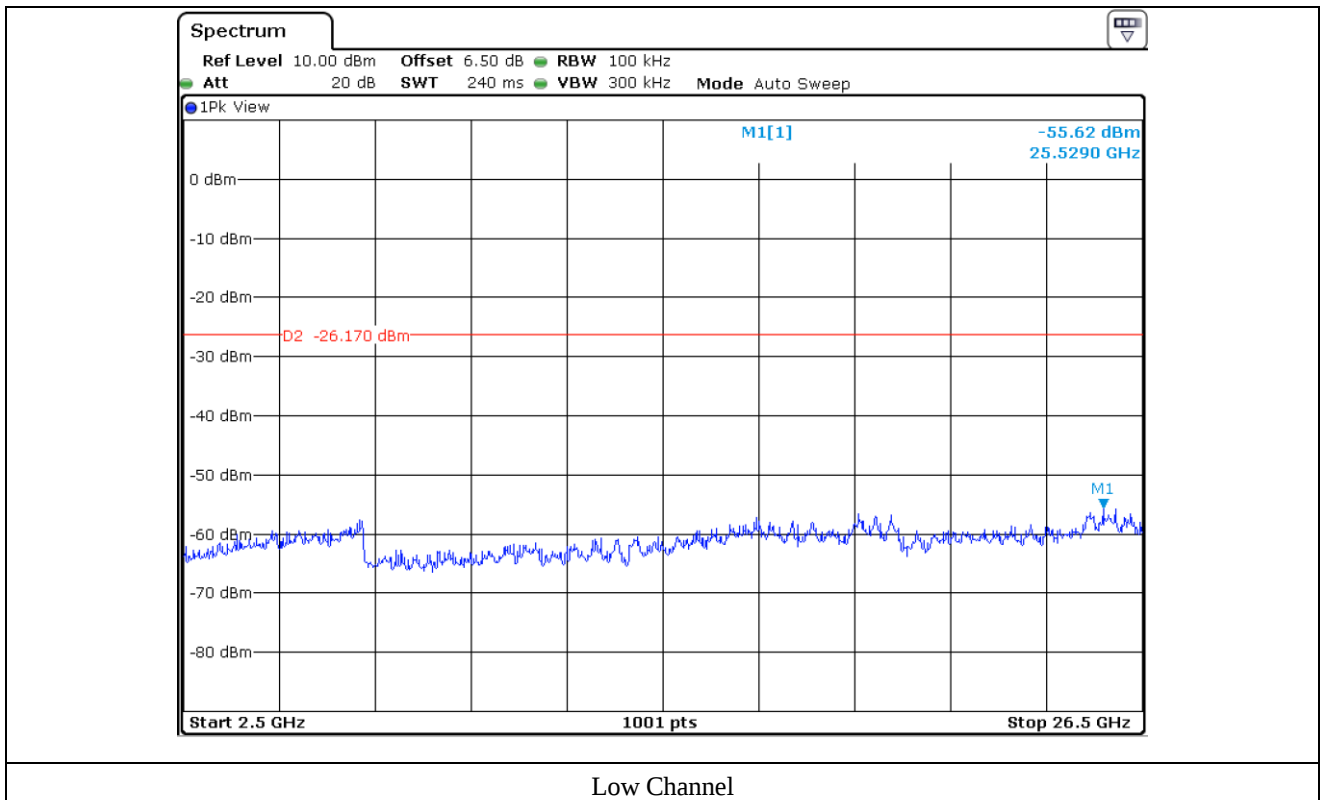


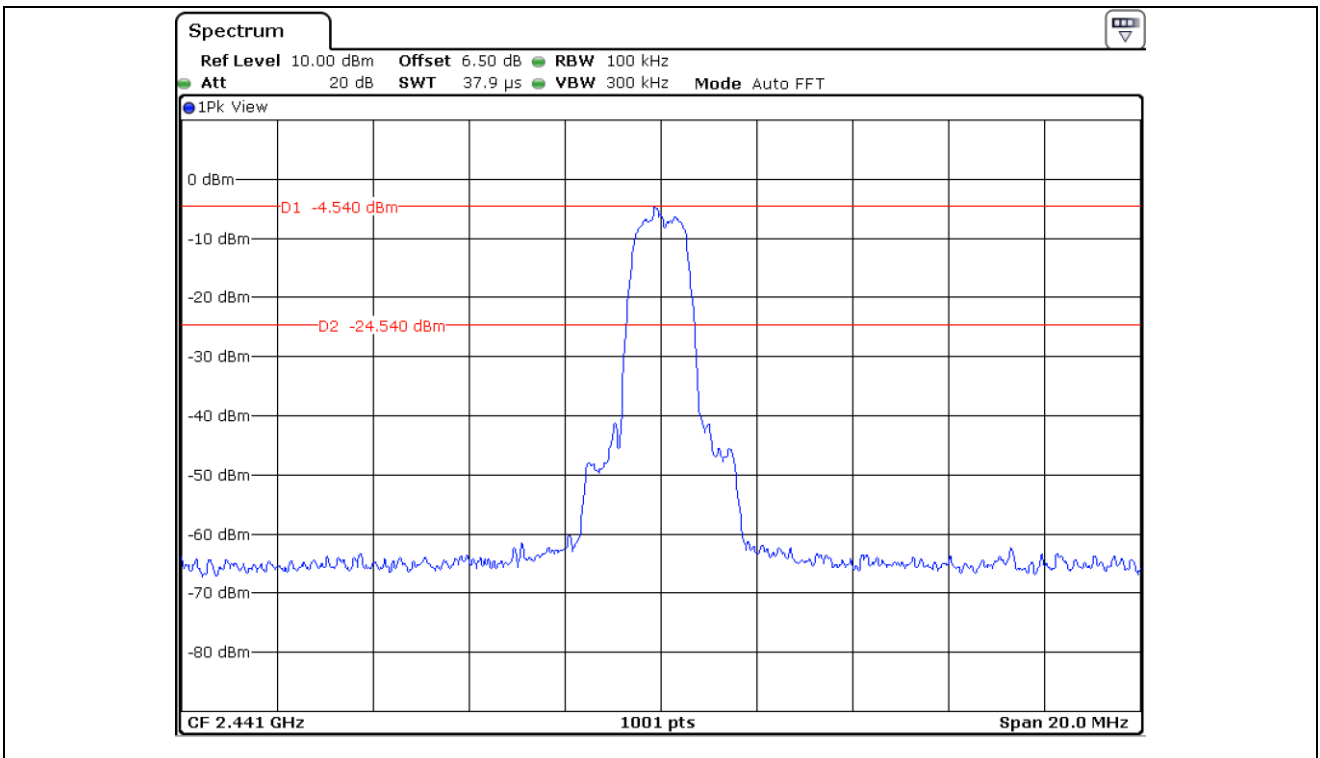


Middle Channel

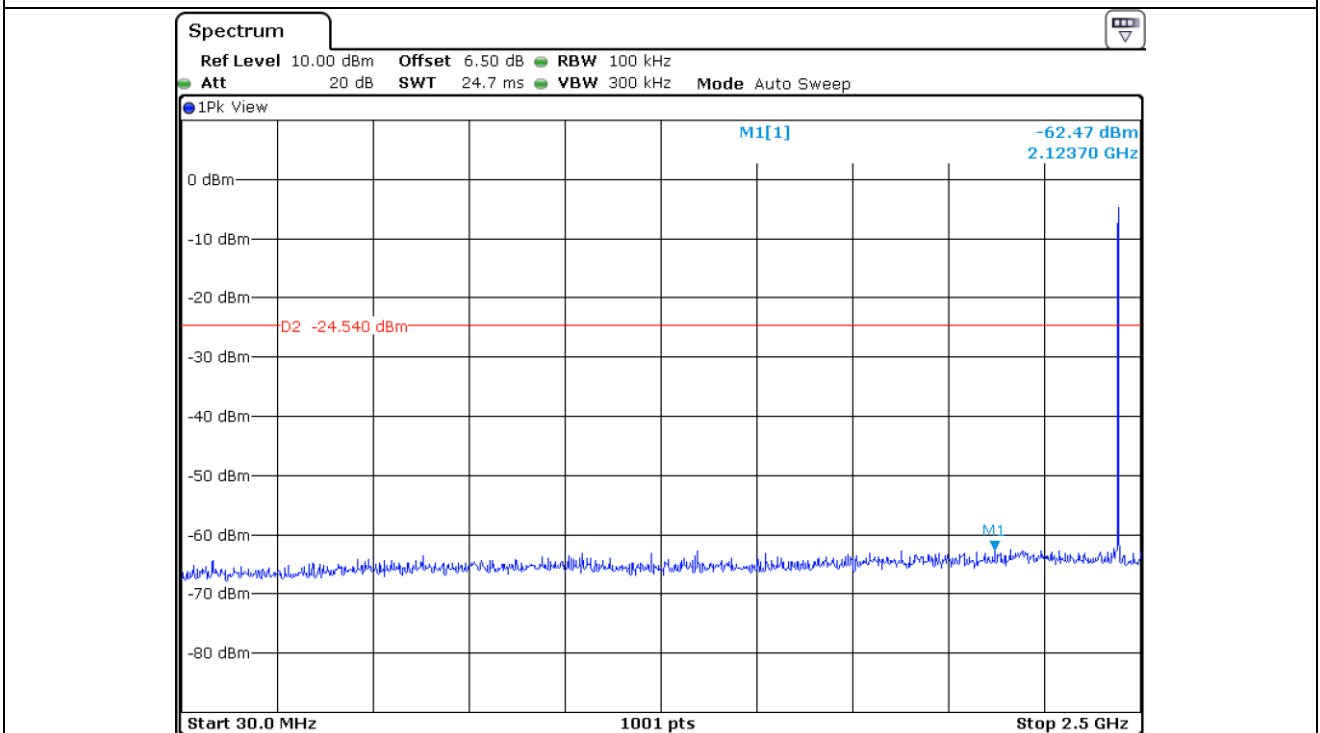


Middle Channel

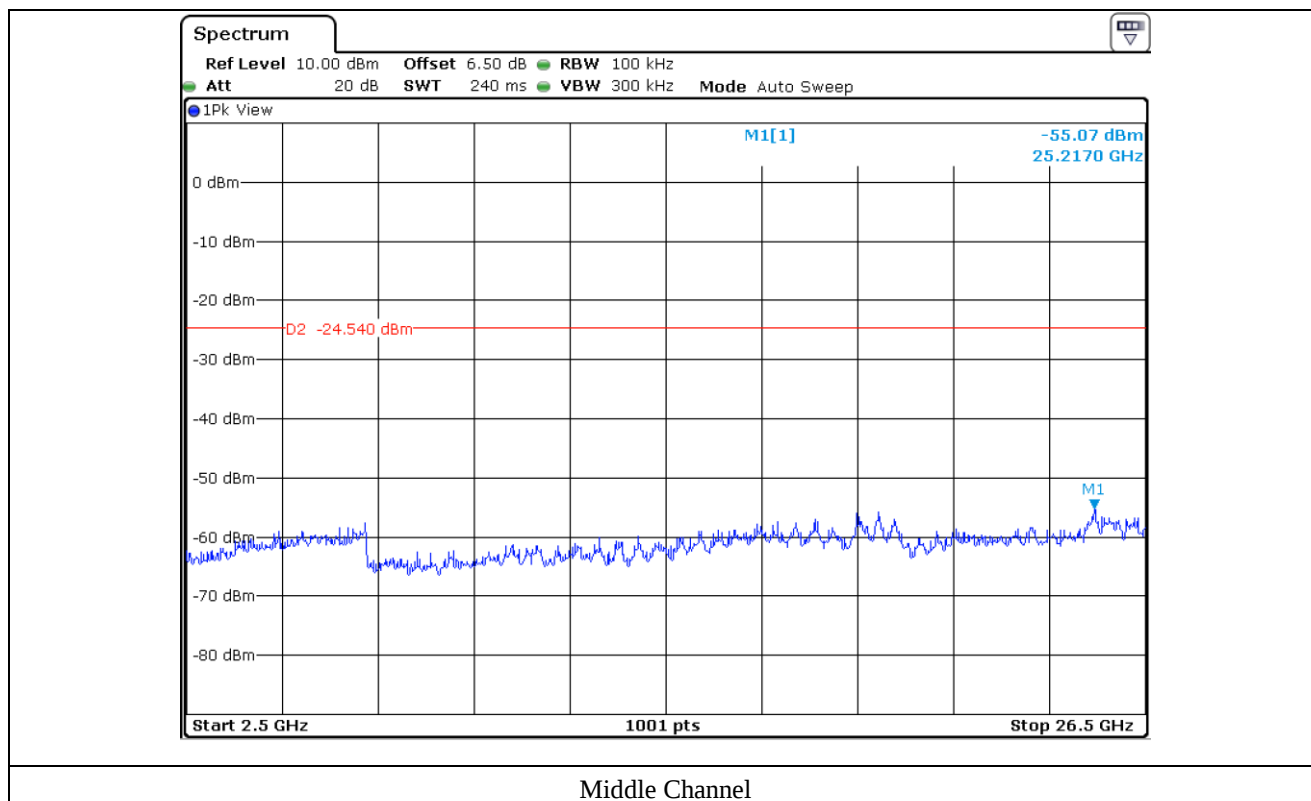


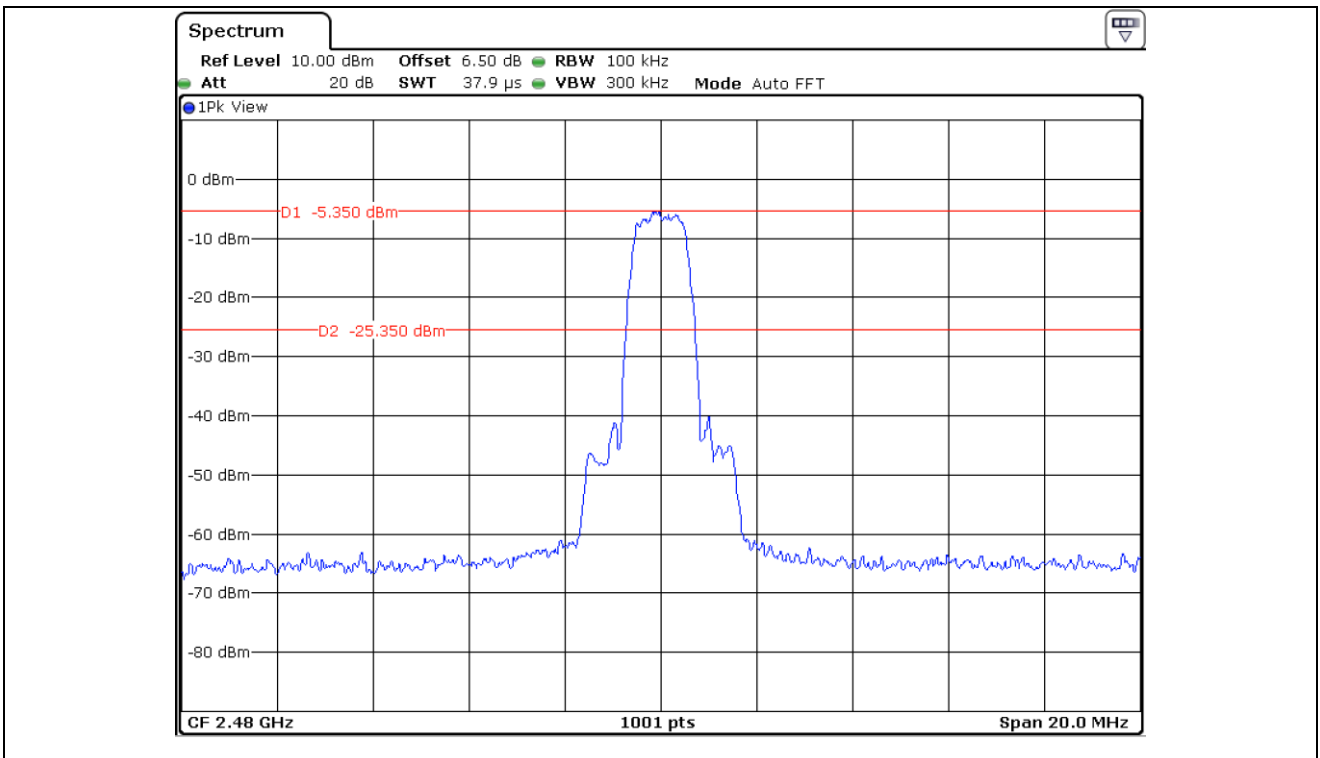


High Channel

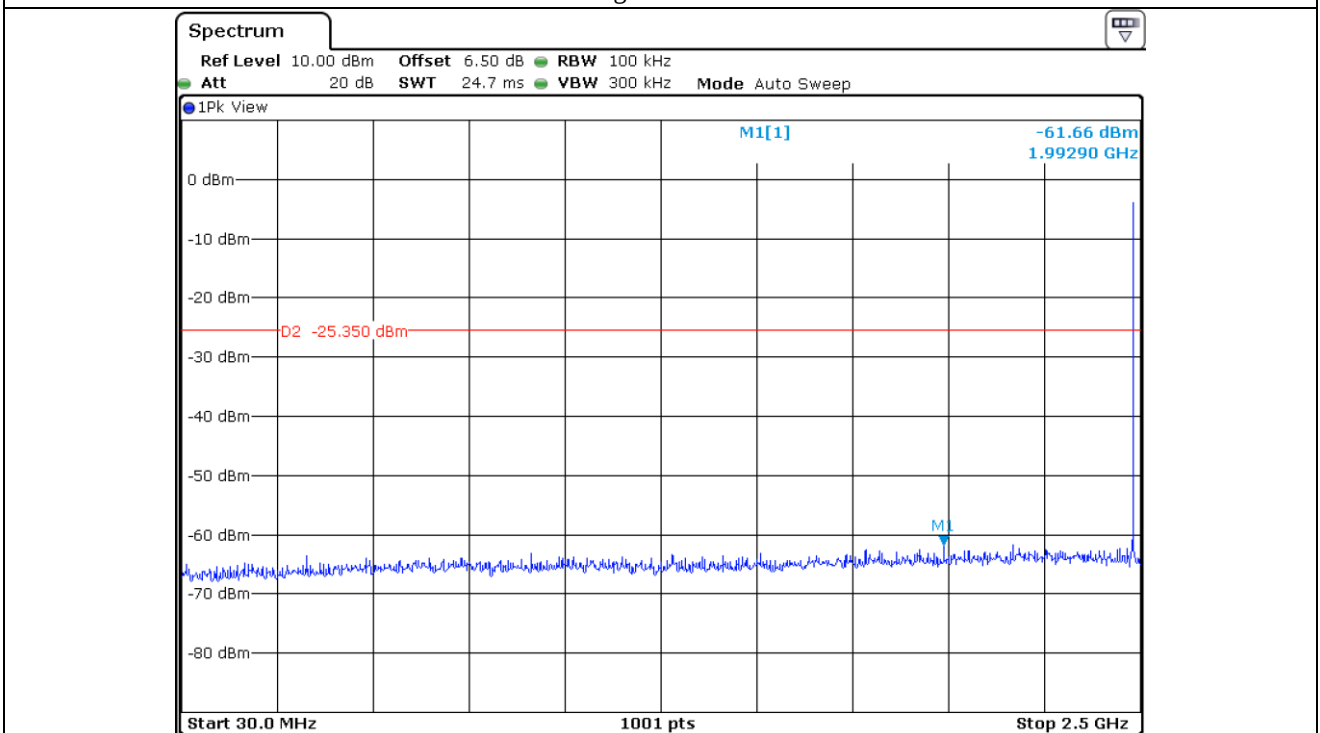



High Channel

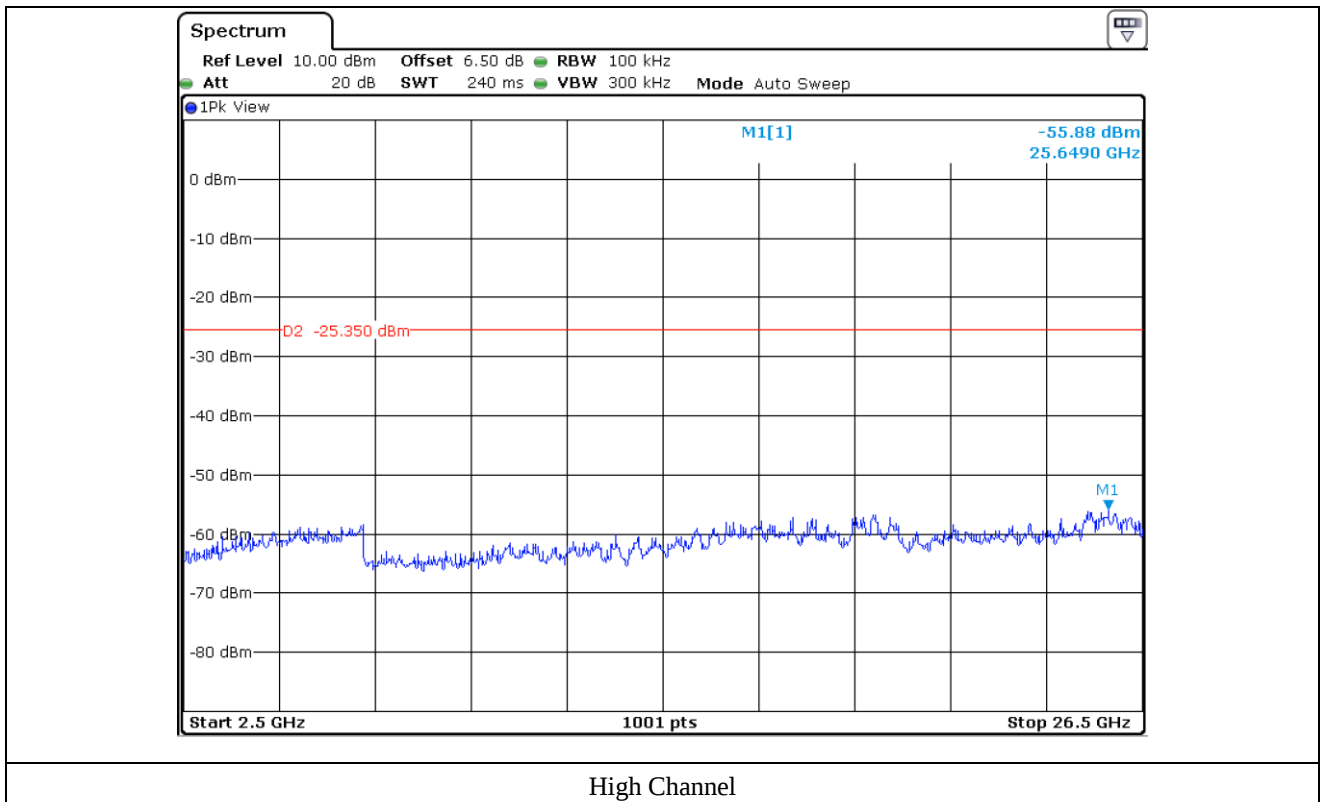


12.5.3 Test data for 3 Mbps

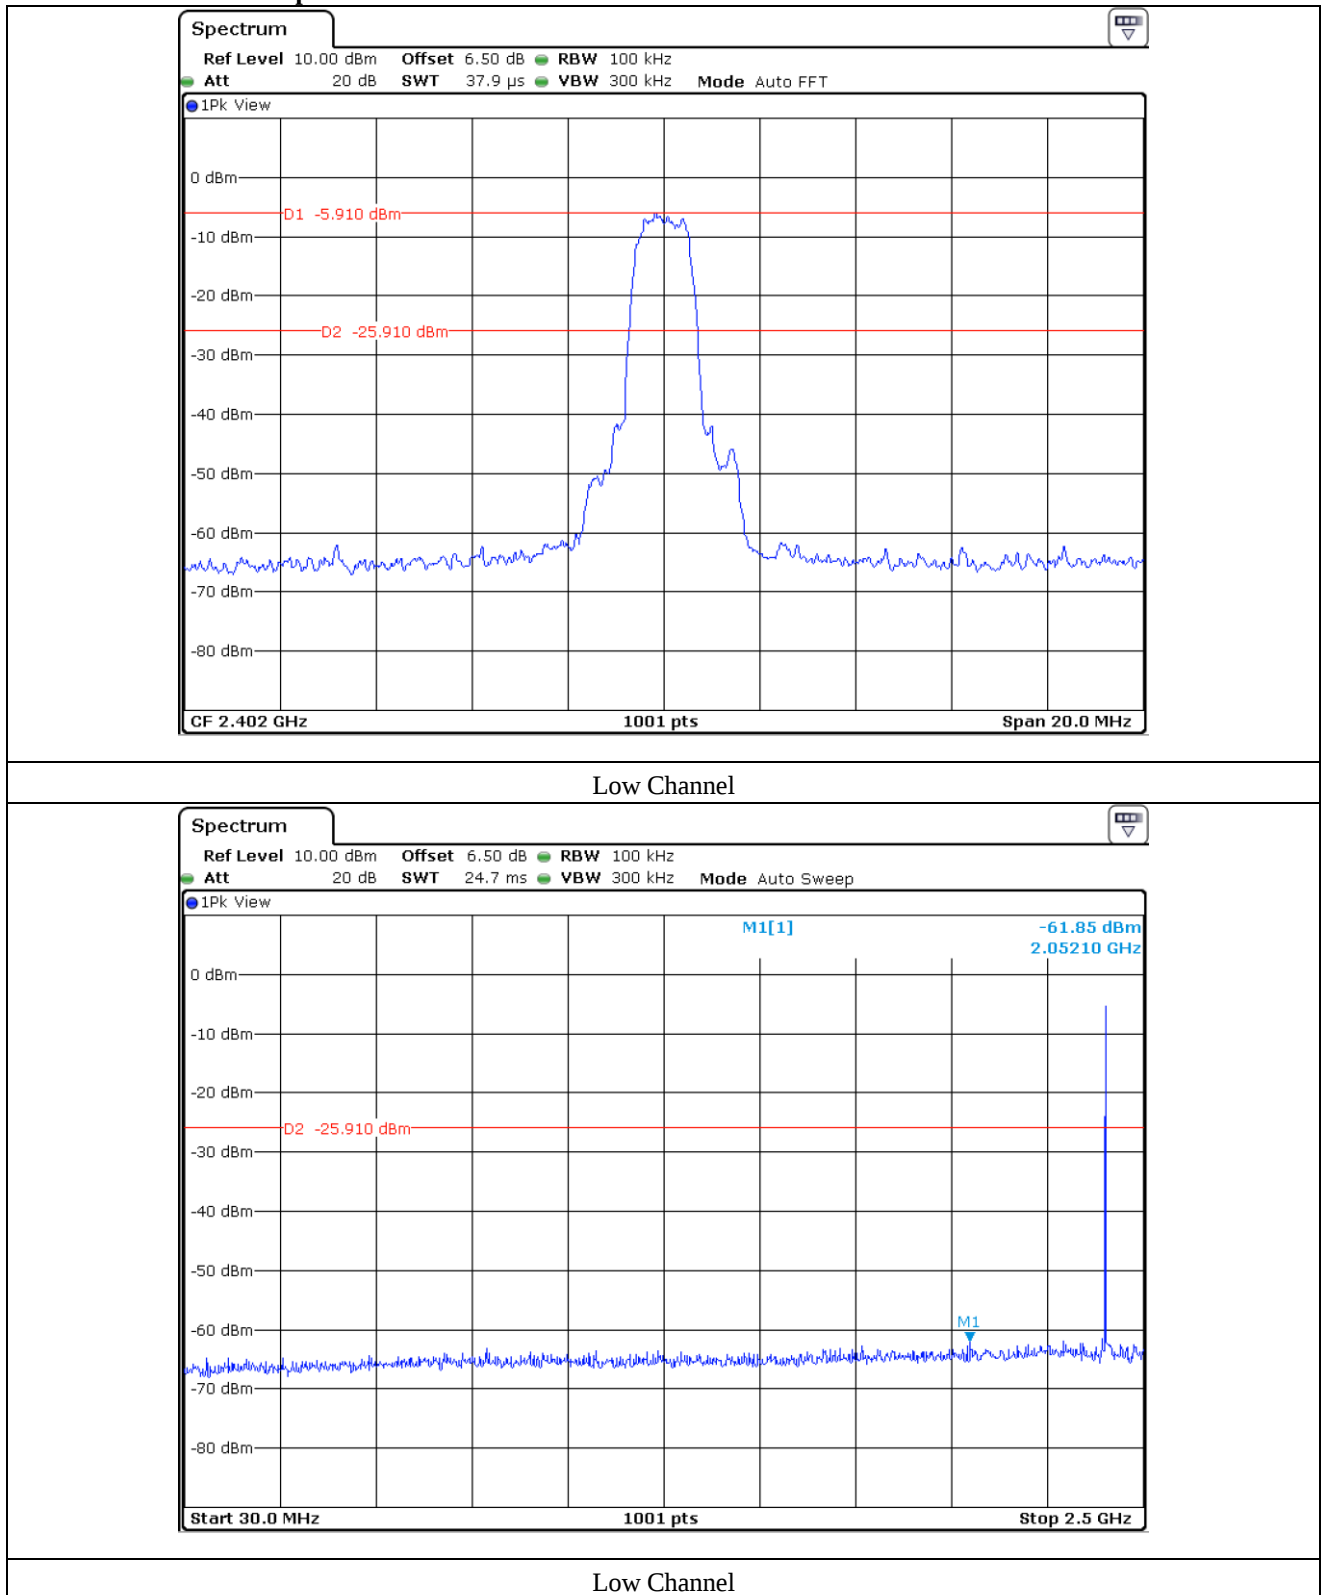

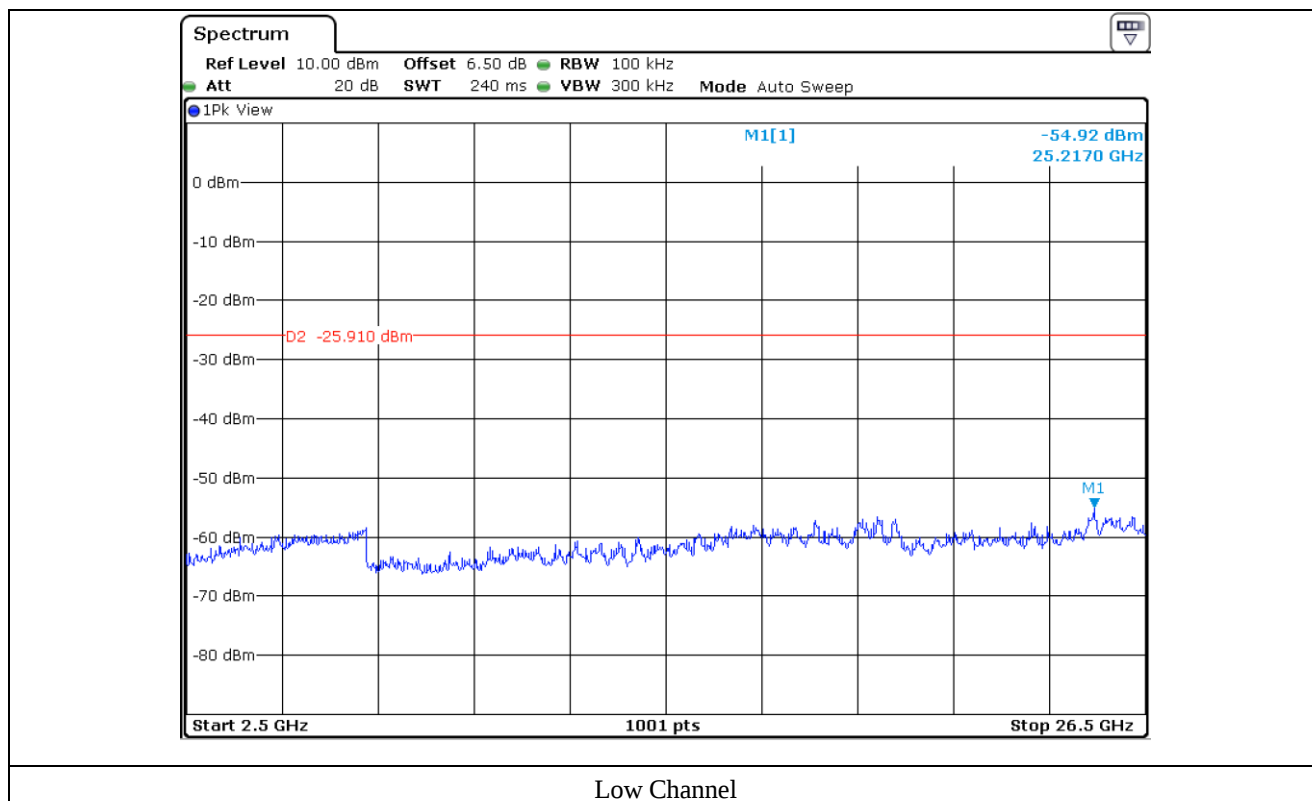


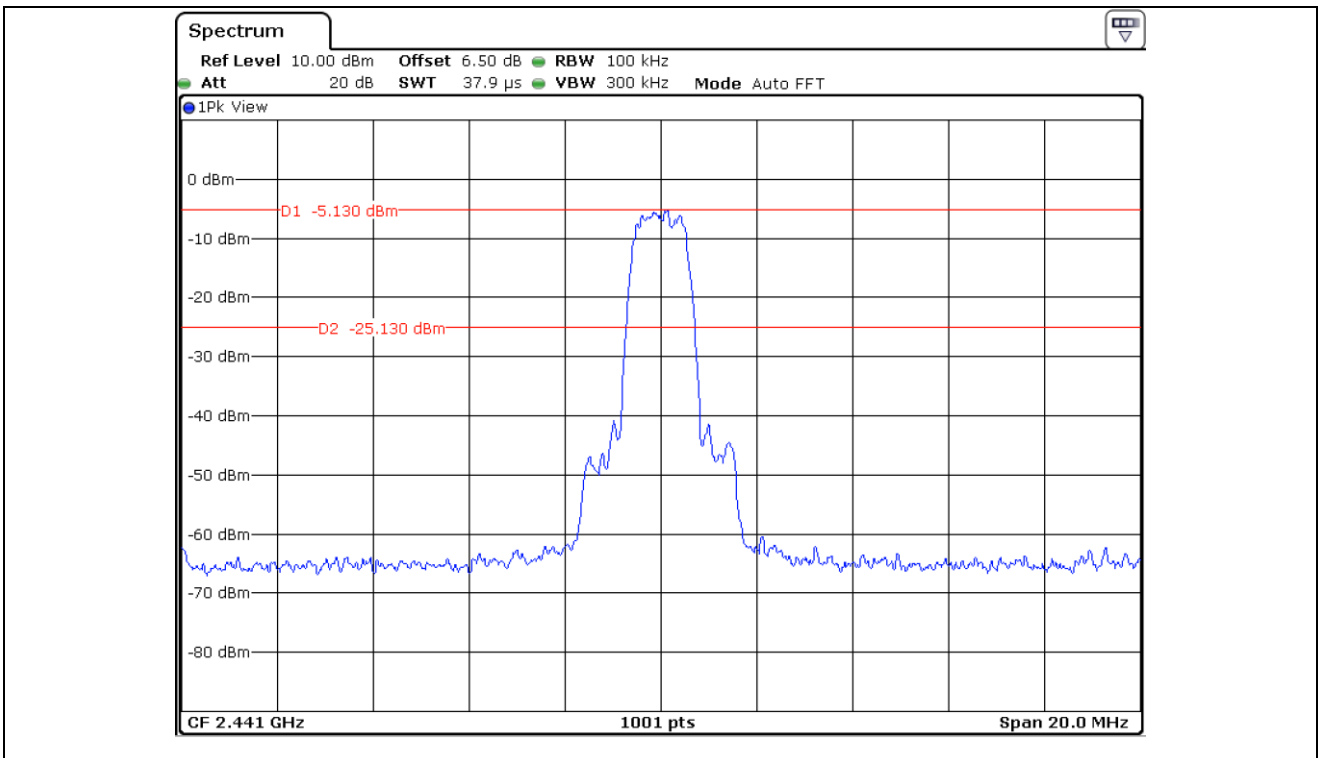


Middle Channel

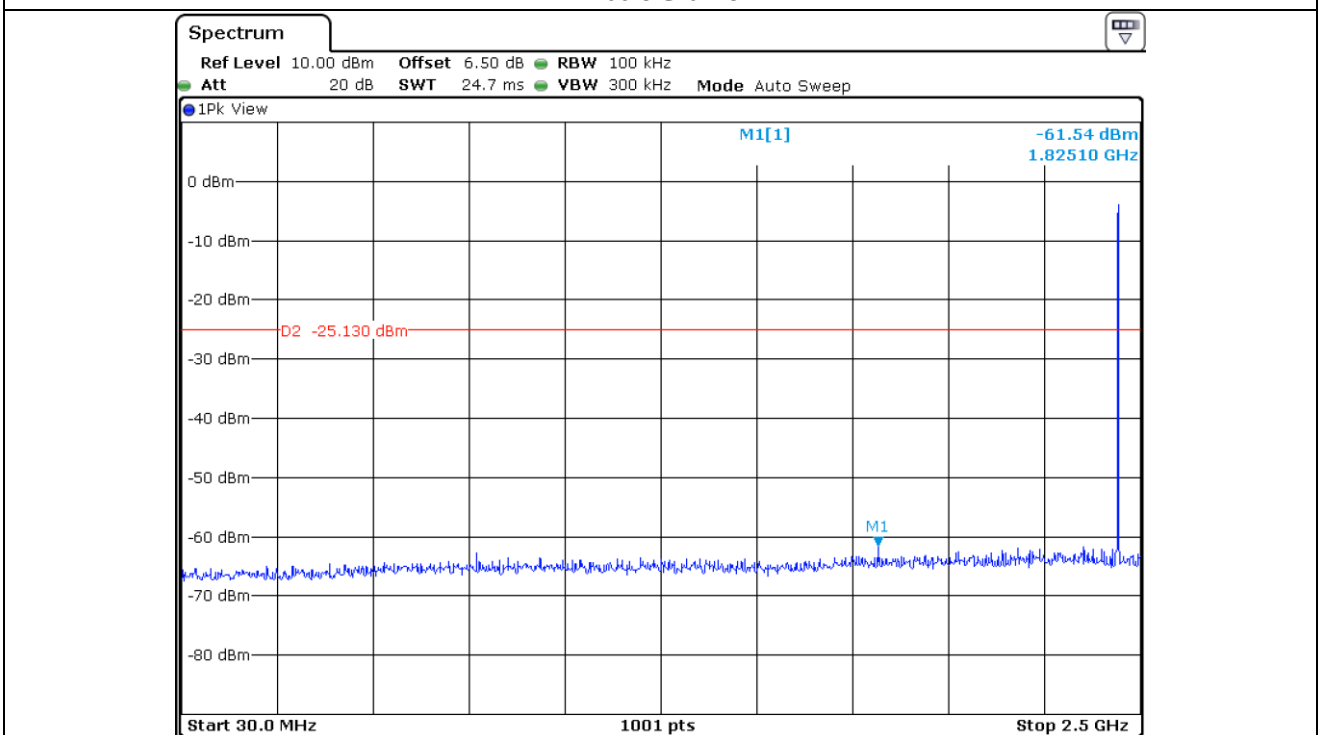


Middle Channel

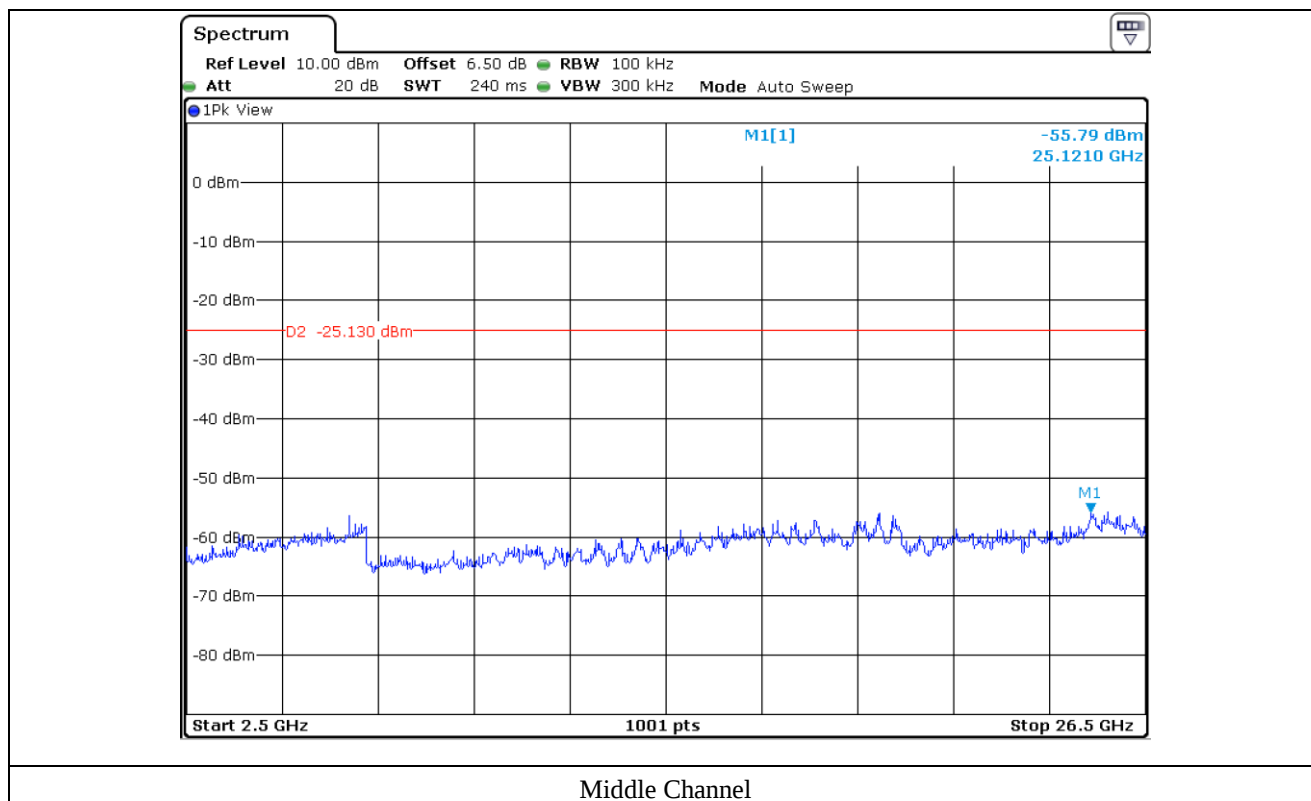


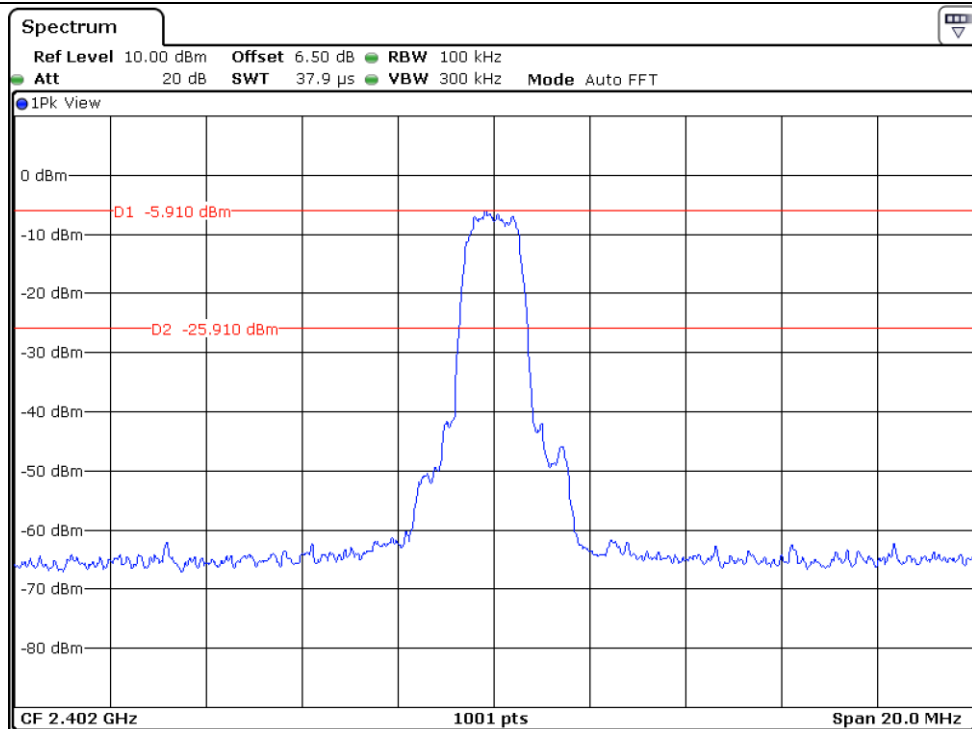

High Channel

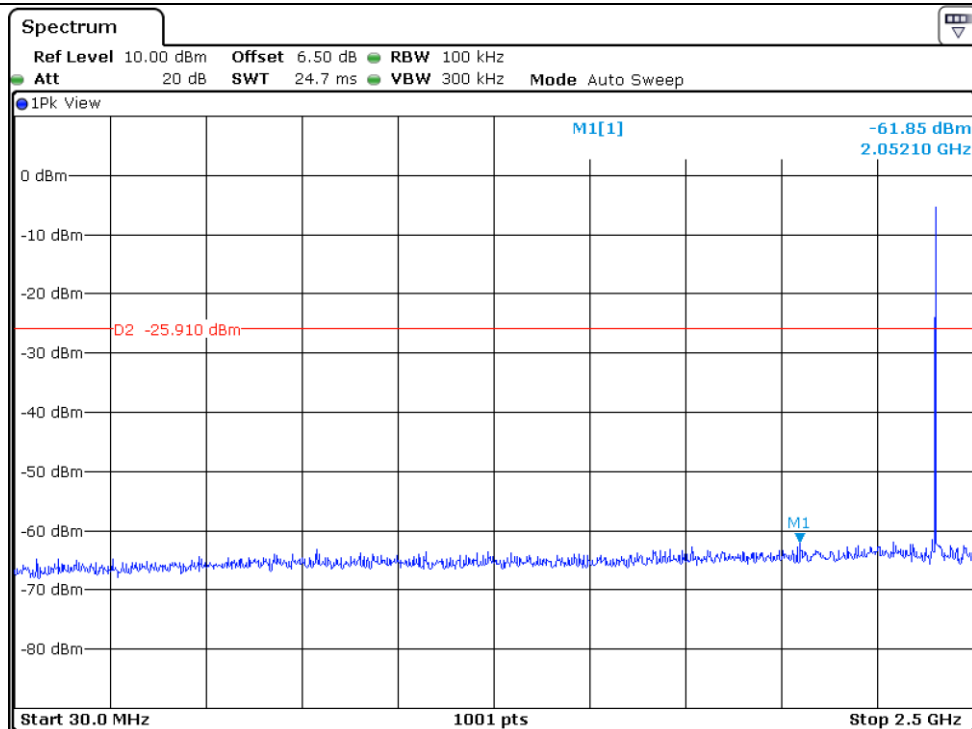

High Channel

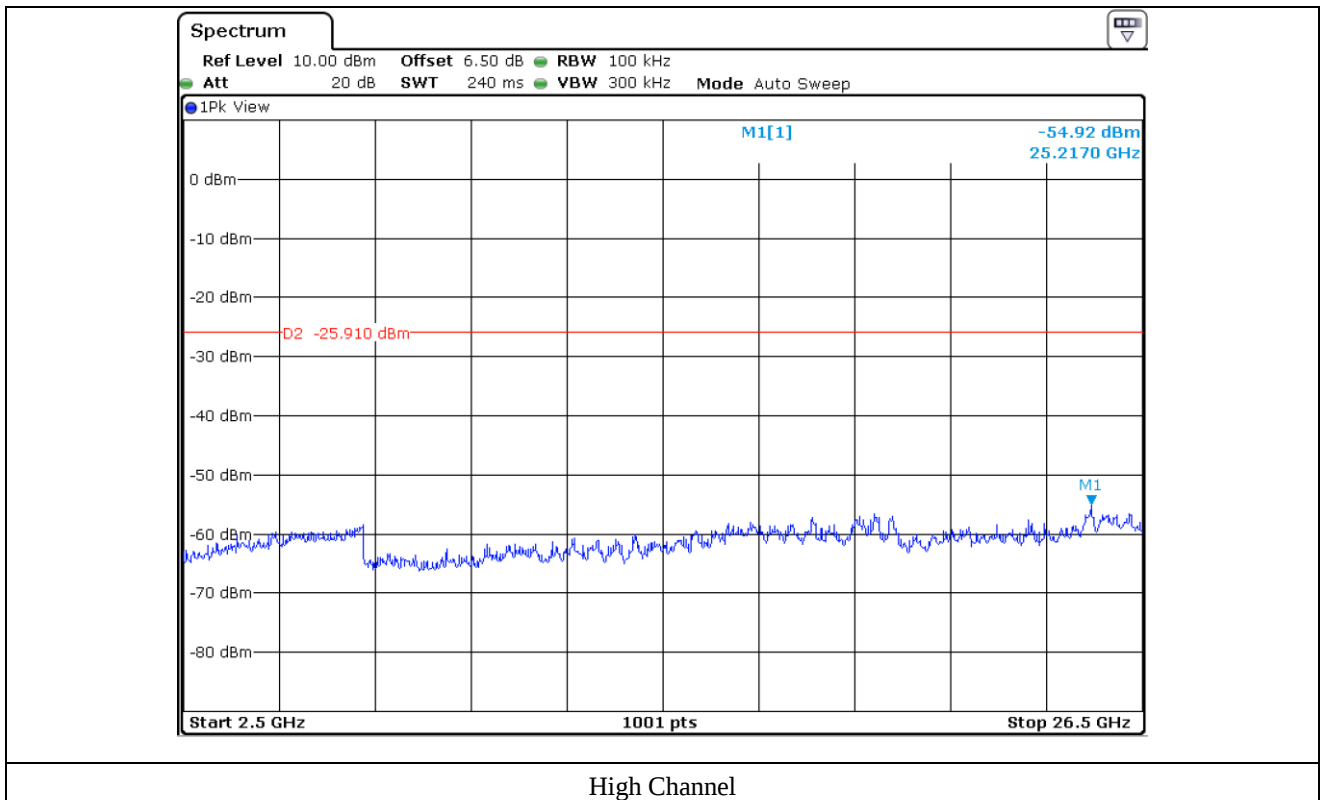

12.6 Test data for Transmitting Mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 311.40	42.63	Peak	H	27.84	8.80	46.16	33.11	74.00	40.89
2 324.43	33.26	Average	H				23.74	54.00	30.26
2 328.66	49.36	Peak	V				39.84	74.00	34.16
2 342.17	33.63	Average	V				24.11	54.00	29.89
Test Data for High Channel									
2 483.51	52.24	Peak	H	27.84	8.80	46.16	42.72	74.00	31.28
2 483.51	36.43	Average	H				26.91	54.00	27.09
2 495.89	52.01	Peak	V				42.49	74.00	31.51
2 483.56	33.86	Average	V				24.34	54.00	29.66

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Sieon Lee / Assistant Manager

12.6.1.2 Test data for 2 Mbps

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 385.49	43.98	Peak	H	27.84	8.80	46.16	34.46	74.00	39.54
2 321.55	33.36	Average	H				23.84	54.00	30.16
2 389.64	45.95	Peak	V				36.43	74.00	37.57
2 389.96	33.90	Average	V				24.38	54.00	29.62
Test Data for High Channel									
2 495.90	51.66	Peak	H	27.84	8.80	46.16	42.14	74.00	31.86
2 483.51	36.13	Average	H				26.61	54.00	27.39
2 495.90	51.77	Peak	V				42.25	74.00	31.75
2 495.95	45.01	Average	V				35.49	54.00	18.51

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Sieon Lee / Assistant Manager

12.6.1.3 Test data for 3 Mbps

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 326.34	43.01	Peak	H	27.84	8.80	46.16	33.49	74.00	40.51
2 343.29	33.45	Average	H				23.93	54.00	30.07
2 389.96	45.16	Peak	V				35.64	74.00	38.36
2 389.96	33.71	Average	V				24.19	54.00	29.81
Test Data for High Channel									
2 496.22	51.43	Peak	H	27.84	8.80	46.16	41.91	74.00	32.09
2 495.95	47.35	Average	H				37.83	54.00	16.17
2 496.07	52.02	Peak	V				42.50	74.00	31.50
2 495.95	47.46	Average	V				37.94	54.00	16.06

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Sieon Lee / Assistant Manager

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	39.37	Peak	H	31.47	13.30	45.55	38.59	74.00	35.41
	29.41	Average	H				28.63	54.00	25.37
	39.59	Peak	V				38.81	74.00	35.19
	29.24	Average	V				28.46	54.00	25.54
Test Data for Middle Channel									
4 882.00	39.14	Peak	H	31.47	13.50	45.55	38.56	74.00	35.44
	28.58	Average	H				28.00	54.00	26.00
	39.09	Peak	V				38.51	74.00	35.49
	28.88	Average	V				28.30	54.00	25.70
Test Data for High Channel									
4 960.00	38.31	Peak	H	31.47	13.70	45.55	37.93	74.00	36.07
	28.05	Average	H				27.67	54.00	26.33
	38.61	Peak	V				38.23	74.00	35.77
	28.21	Average	V				27.83	54.00	26.17

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Sieon Lee / Assistant Manager

12.6.2.2 Test data for 2 Mbps

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	39.57	Peak	H	31.47	13.30	45.55	38.79	74.00	35.21
	29.50	Average	H				28.72	54.00	25.28
	39.02	Peak	V				38.24	74.00	35.76
	29.53	Average	V				28.75	54.00	25.25
Test Data for Middle Channel									
4 882.00	39.37	Peak	H	31.47	13.50	45.55	38.79	74.00	35.21
	28.75	Average	H				28.17	54.00	25.83
	38.79	Peak	V				38.21	74.00	35.79
	28.46	Average	V				27.88	54.00	26.12
Test Data for High Channel									
4 960.00	38.58	Peak	H	31.47	13.70	45.55	38.20	74.00	35.80
	28.26	Average	H				27.88	54.00	26.12
	38.32	Peak	V				37.94	74.00	36.06
	27.86	Average	V				27.48	54.00	26.52

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Sieon Lee / Assistant Manager

12.6.2.3 Test data for 3 Mbps

- Test Date : May 23, 2019 ~ July 09, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	40.20	Peak	H	31.47	13.30	45.55	39.42	74.00	34.58
	29.43	Average	H				28.65	54.00	25.35
	39.86	Peak	V				39.08	74.00	34.92
	29.65	Average	V				28.87	54.00	25.13
Test Data for Middle Channel									
4 882.00	38.50	Peak	H	31.47	13.50	45.55	37.92	74.00	36.08
	28.93	Average	H				28.35	54.00	25.65
	37.97	Peak	V				37.39	74.00	36.61
	28.54	Average	V				27.96	54.00	26.04
Test Data for High Channel									
4 960.00	37.99	Peak	H	31.47	13.70	45.55	37.61	74.00	36.39
	28.37	Average	H				27.99	54.00	26.01
	39.11	Peak	V				38.73	74.00	35.27
	28.39	Average	V				28.01	54.00	25.99

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Sieon Lee / Assistant Manager

12.6.3 Spurious Radiated Emission

12.6.3.1 Test Data for 30 MHz ~ 1 000 MHz

Humidity Level : 48 % R.H.

Temperature: 24 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Car Navigation

Date: May 23, 2019 ~ July 09, 2019

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

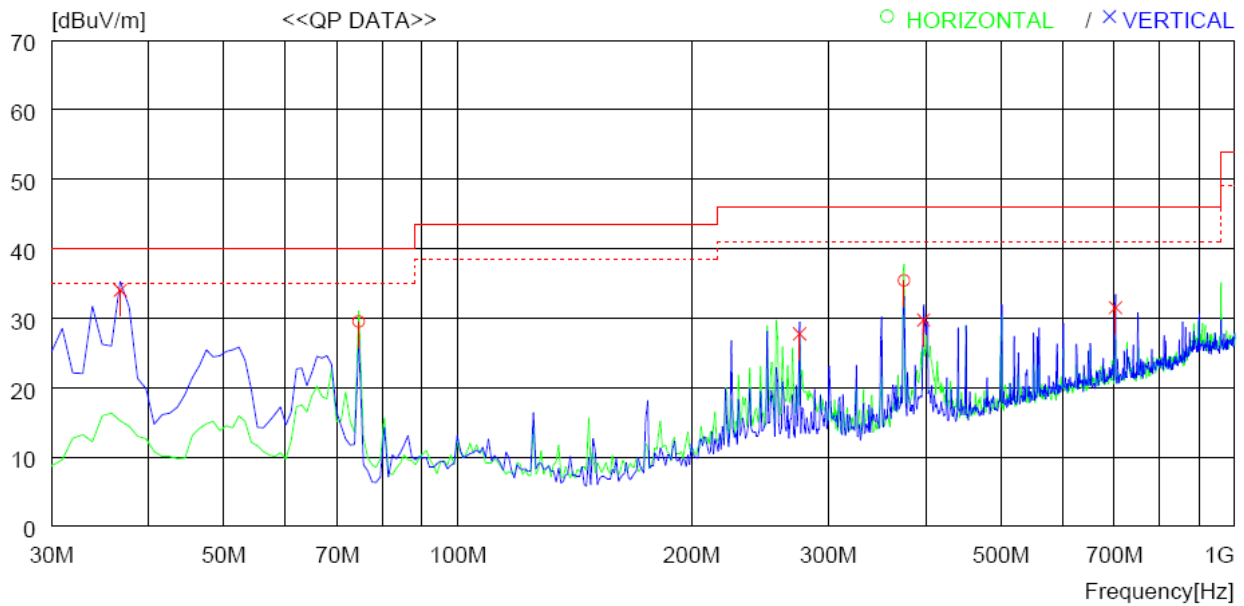

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	74.620	52.2	8.5	1.9	33.1	29.5	40.0	10.5	200	183
2	375.320	48.6	15.3	4.5	33.0	35.4	46.0	10.6	100	267
----- Vertical -----										
3	36.790	52.1	13.6	1.4	33.1	34.0	40.0	6.0	100	253
4	275.410	43.8	13.0	3.9	33.0	27.7	46.0	18.3	200	310
5	397.630	42.4	15.8	4.6	33.1	29.7	46.0	16.3	100	42
6	702.205	38.7	20.0	6.1	33.3	31.5	46.0	14.5	100	0

Tested by: Sieon Lee / Assistant Manager

12.6.3.2 Test Data for Below 30 MHz

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.								

12.6.3.3 Test Data for above 1 GHz

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.								



Tested by: Sieon Lee / Assistant Manager

12.6.4 Test Data for Co-Location (BT+WLAN 2.4GHz)

12.6.4.1 Test Data for 30 MHz ~ 1 000 MHz

Humidity Level : 48 % R.H.

Temperature: 24 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Car Navigation

Date: May 23, 2019 ~ July 09, 2019

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

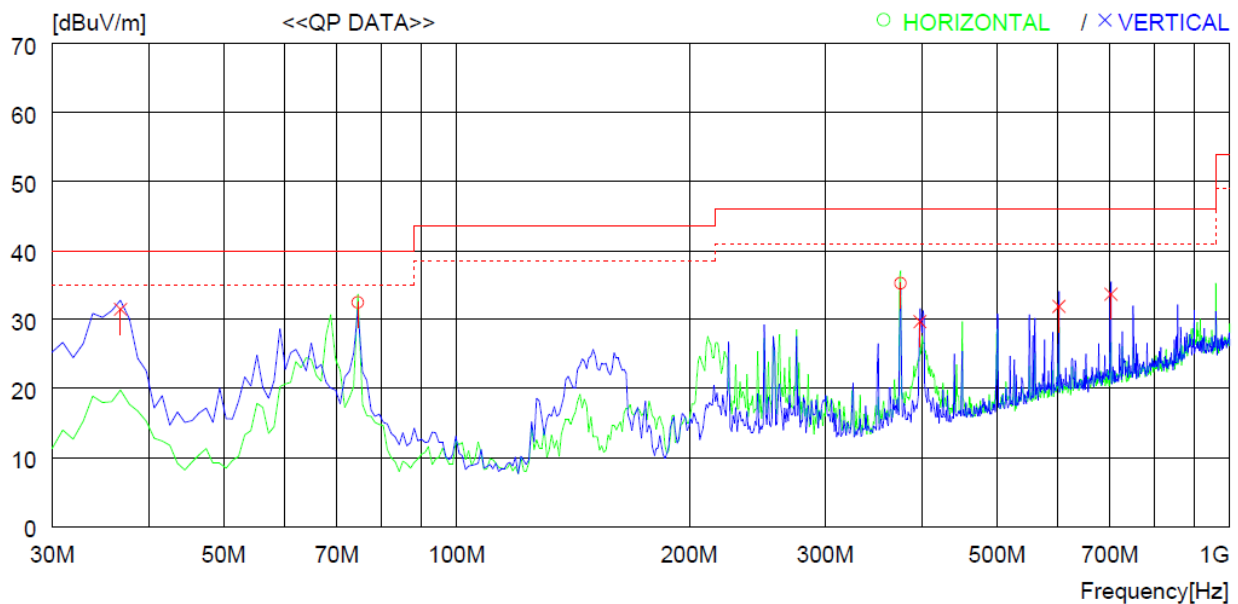

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	74.620	55.2	8.5	1.9	33.1	32.5	40.0	7.5	300	355
2	375.320	48.5	15.3	4.5	33.0	35.3	46.0	10.7	100	254
----- Vertical -----										
3	36.790	49.6	13.6	1.4	33.1	31.5	40.0	8.5	100	359
4	397.630	42.4	15.8	4.6	33.1	29.7	46.0	16.3	200	0
5	601.328	40.1	19.5	5.6	33.3	31.9	46.0	14.1	100	359
6	702.205	40.9	20.0	6.1	33.3	33.7	46.0	12.3	100	359

Tested by: Sieon Lee / Assistant Manager

12.6.4.2 Test Data for Below 30 MHz

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.								

12.6.4.3 Test Data for above 1 GHz

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.								



Tested by: Sieon Lee / Assistant Manager

12.6.5 Test Data for Co-Location (BT+WLAN 5.2GHz)

12.6.5.1 Test Data for 30 MHz ~ 1 000 MHz

Humidity Level : 48 % R.H.

Temperature: 24 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Car Navigation

Date: May 23, 2019 ~ July 09, 2019

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

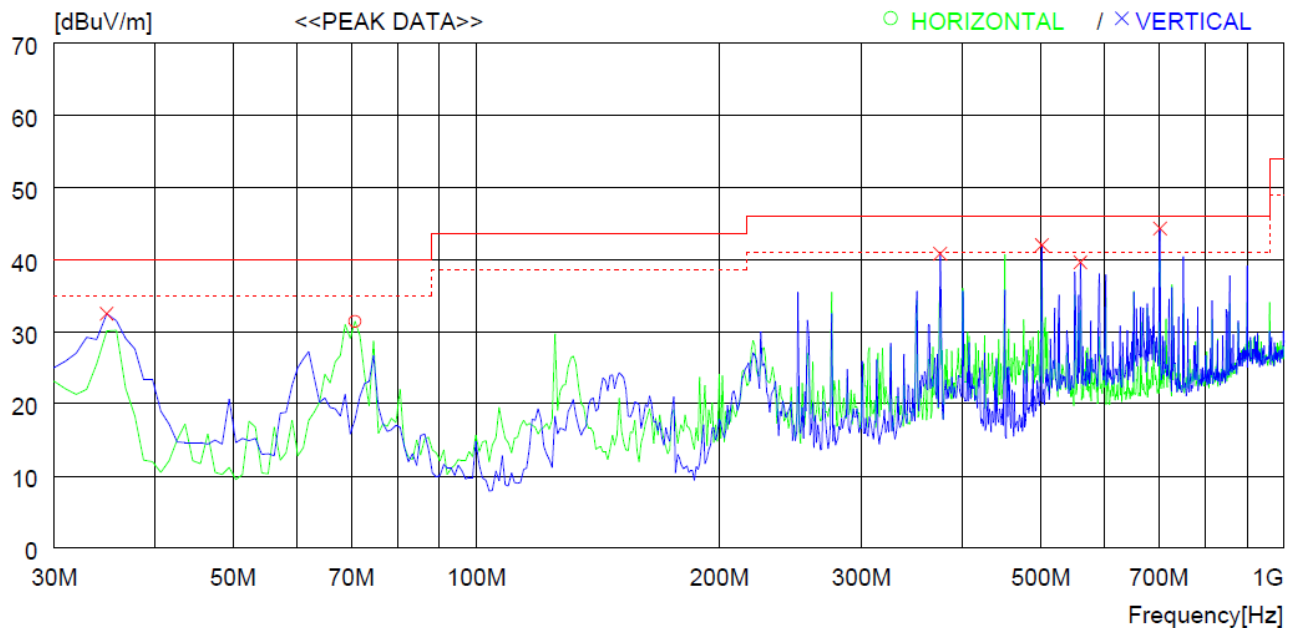

No.	FREQ [MHz]	READING [dBuV]	ANT PEAK FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	70.740	53.3	9.2	2.0	33.1	31.4	40.0	8.6	200	355
----- Vertical -----										
2	34.850	50.9	13.3	1.4	33.1	32.5	40.0	7.5	100	0
3	375.320	54.0	15.3	4.5	33.0	40.8	46.0	5.2	100	36
4	501.421	52.4	17.6	5.2	33.2	42.0	46.0	4	100	0
5	559.619	48.8	18.7	5.4	33.3	39.6	46.0	6.4	100	43
6	702.205	51.5	20.0	6.1	33.3	44.3	46.0	1.7	100	0

Tested by: Sieon Lee / Assistant Manager

12.6.5.2 Test Data for Below 30 MHz

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.								

12.6.5.3 Test Data for above 1 GHz

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.								



Tested by: Sieon Lee / Assistant Manager

12.6.6 Test Data for Co-Location (BT+WLAN 5.8GHz)

12.6.6.1 Test Data for 30 MHz ~ 1 000 MHz

Humidity Level : 48 % R.H.

Temperature: 24 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Car Navigation

Date: May 23, 2019 ~ July 09, 2019

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

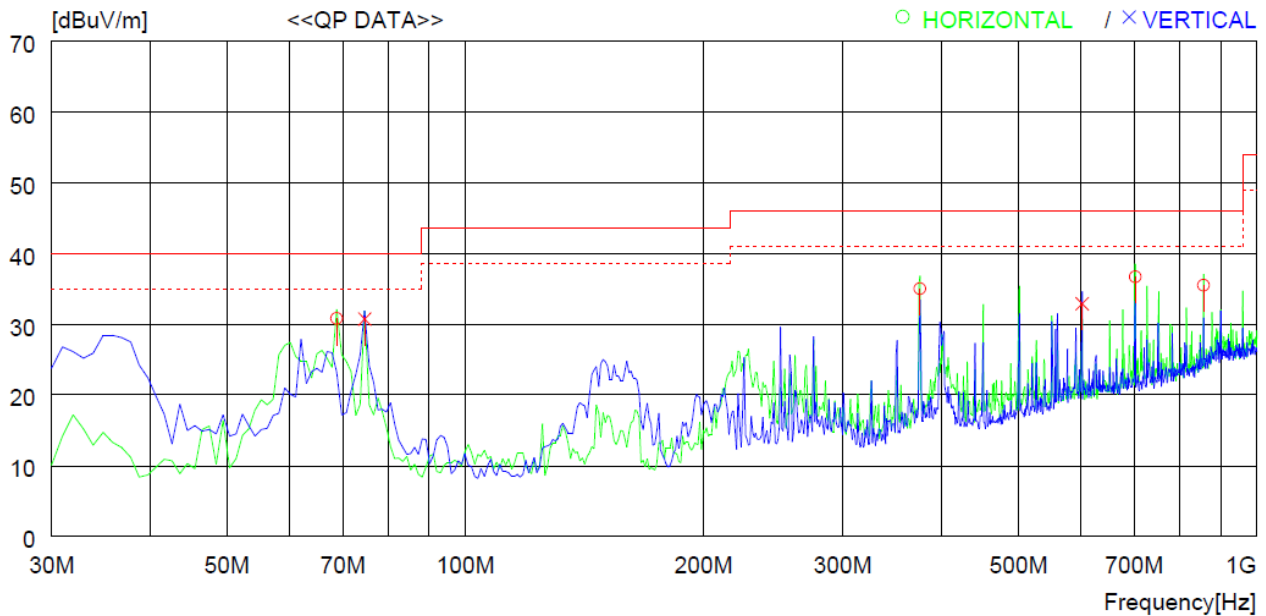

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
		QP	FACTOR							
	[MHz]	[dBuV]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	68.800	52.1	9.8	2.0	33.1	30.8	40.0	9.2	300	203
2	375.320	48.2	15.3	4.5	33.0	35.0	46.0	11.0	100	255
3	702.205	43.9	20.0	6.1	33.3	36.7	46.0	9.3	300	94
4	856.430	39.6	21.7	6.9	32.7	35.5	46.0	10.5	300	359
----- Vertical -----										
5	74.620	53.4	8.5	1.9	33.1	30.7	40.0	9.3	200	0
6	601.328	41.1	19.5	5.6	33.3	32.9	46.0	13.1	100	359

Tested by: Sieon Lee / Assistant Manager

12.6.6.2 Test Data for Below 30 MHz

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.								

12.6.6.3 Test Data for above 1 GHz

- . Test Date : May 23, 2019 ~ July 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit and thus not reported.								



Tested by: Sieon Lee / Assistant Manager