



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

SAR Compliance Test Report

APPLICANT NAME & ADDRESS :

LG Electronics Inc.
459-9, Kasan-dong, Keumchun-ku,
Seoul 153-023, Korea

DATA & LOCATION OF TESTING

Dates of testing : 2006 1/25 ~ 3/2
Test Site : ESTECH Co., Ltd. Korea

Test Device :

Models : MG185, MG185c, MG185d

FCC ID : BEJMG185

TYPE : GSM Phone (Prototype)

Test report no :

ESTSAR0603-001

Number of page :

25

Contact person :

Bong Hyo, Han

Responsible test Engineer :

K.H.Kang

Testing has been
Carried out in
Accordance with :

IEEE P1528-200X Draft 6.4
Recommended Practice for Determining the Peak Spatial-Average Specific
Absorption Rate(SAR) in the Human Body Due to Wireless Communications
Device : Experimental Techniques

Applicant Type :

Certification

FCC CLASSIFICATION :

Licensed Non-Broadcast Transmitter Held to Ear (TNE)
Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s)

§2.1093; FCC/OET Bulletin 65 Supplement C (July 2001)

Test results :

The Tested device complies with the requirements in respect of all
parameters subject to the test. The test results and statements relate only
to the items tested. The test report shall not be reproduced receipt in full,
without written approval of the laboratory.

Date and Signatures : 2006/3/2

Report Prepared By : Engineer/ K.H.Kang

(Signature)

Manager Engineer/ Jay Kim

(Signature)

Test report no : ESTSAR0603-001

FCC ID : BEJMG185

Web : www. estech. co. kr

Page 1 of 25



Table of Contents

1. SUMMARY FOR SAR TET REPORT	3
1.1 Head Configuration	3
1.2 Body Worn Configuration	3
1.3 Measurement Uncertainty	3
2. INTRODUCTION	4
3. DESCRIPTION OF THE DEVICE UNDER TEST	5
3.1 Antenna Description	5
3.2 Device Description	5
3.3 Battery Option	5
4. TEST CONDITIONS	6
4.1 Ambient Conditions	6
4.2 RF Characteristics of The Test Site	6
4.3 Test Signal, Frequencies, And Output Power	6
5. DESCRIPTION OF THE TEST EQUIPMENT	7
5.1 Test System Specifications	7
5.2 SAR Measurement Setup	7
5.3 DASY 4 E-Field Probe System	8
5.4 Phantom & Equivalent Tissues	10
6. DESCRIPTION OF THE TEST PROCEDURE	12
6.1 Definition of Reference Point	12
6.2 Test Configuration Positions	13
6.3 Scan Procedures	16
6.4 SAR Averaging Methods	16
7. MEASUREMENT UNCERTAINTY	17
8. SYSTEM VERIFICATION	18
8.1 Tissue Verification	18
8.2 Test System Validation	18
9. RESULTS	19
10. REFERENCES	25
APPENDIX A : Validation Test Data of Tissue	
APPENDIX B : Validation Test Data	
APPENDIX C : SAR Test Data	
APPENDIX D : Calibration Certificates	



1. SUMMARY FOR TEST REPORT

FCC ID	BEJMG185
Date of test	2006/1/25 ~ 2006/3/2
Responsible test engineer	Jay Kim
Measurement performed by	K.H.Kang
EUT Type	GSM Phone (Prototype)
Tx Frequency	824.2 ~ 848.8MHz(GSM850), 1850.2 ~ 1909.8 MHz(PCS1900)
Rx Frequency	869.2 ~ 893.8MHz(GSM850), 1930.2 ~ 1989.8 MHz(PCS1900)
Max. RF Output Power	GSM (33 dBm) PCS (30 dBm)

Maximum Results Found During SAR Evaluation

1.1 Head Configuration

Max. SAR Measurement

FREQUENCY		Modulation	Conducted Power(dBm)		Device test position	Antenna position	SAR (W/kg)
MHz	Ch		dBm	Battery			
824.2	128	GSM	33	Standard	Left Touch	—	1.19
1850.2	512	GSM	30	Standard	Left Touch	—	0.391

1.2 Body Worn Configuration

Max. SAR Measurement

FREQUENCY		Modulation	Conducted Power(dBm)		Separation test position	Antenna position	SAR (W/kg)
MHz	Ch		dBm	Battery			
824.2	128	GSM	33	Standard	1.5cm [w/o Holster]	—	1.23
1850.2	512	GSM	30	Standard	1.5cm [w/o Holster]	—	0.366

1.3 Measurement Uncertainty

Combine Standard Uncertainty	± 10.81 (k=1)
Extended Standard Uncertainty	± 21.62 (k=2, 95% CONFIDENCE LEVEL)



2. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable device.[1]

The safety limits used for the environmental evaluation measurements are the criteria published by the based on American National Standards Institute (ANSI) For localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for safety Levels with Respect to Human Exposure to Radio Frequency Electronic Fields, 3 kHz to 300 GHz. (c) 1992 by the institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields," NCRP Report No. 86 (c) NCRP, 1986, Bethesda, MD 20814.[6] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). it is also defined as the rate of rf energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1.).

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

Where:

σ = conductivity of the tissue-simulant material (S/m)

E = mass density of the tissue-simulant material (kg/m³)

ρ = Total RMS electric field strength (V/m)

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204

3. DESCRIPTION OF THE DEVICE UNDER TEST

The FCC rules for evaluating portable devices for RF exposure compliance are contained in 47 CFR §2.1093. For purposes of RF exposure evaluation, a portable device is defined as a transmitting device designed to be used with any part of its radiating structure in direct contact with the user's body or within 20 centimeters of the body of a user or bystanders under normal operating conditions. This category of devices would include hand-held cellular and PCS telephones that incorporate the radiating antenna into the hand-piece and wireless transmitters that are carried next to the body. Portable devices are evaluated with respect to SAR limits for RF exposure. The applicable SAR limit for portable transmitters used by consumers is 1.6 watts/kg, which is averaged over any one gram of tissue defined as a tissue volume in the shape of a cube.

2.1 Antenna Description

Type	Internal Antenna
Location	the top of the device
Radiator Material	Copper

2.2 Device Description

FCC ID	FCC ID : BEJMG185
Serial numbers	—
Exposure environment	Uncontrolled exposure
Device category	Portable device
Mode(s) of Operation	GSM / GPRS
Modulation Mode(s)	GSM
Duty Cycle	8.3
Transmitting	824.2 ~ 848.8MHz(GSM850), 1850.2 ~ 1909.8 MHz(PCS1900)
Frequency Range(s)	
test signal method	☒ Base station simulator ☐ Internal test code

2.3 Battery Options

There is only one battery option available for tested device,



4. TEST CONDITIONS

4.1 Ambient Conditions

Ambient Temperature (°C)	22
Tissue simulating liquid temperature (°C)	22
Humidity (%)	48

4.2 RF Characteristics of The Test Site

Tests were performed in a fully enclosed RF Shielded environment

4.3 Test Signal, Frequencies, And Output Power

The handset was placed into simulated call mode (850MHz GSM, 1900MHz PCS modes) using manufacturers test codes.

In all operation bands the measurements were performed on lowest, middle and highest channels.

The phone was set to maximum power level during the all tests and at the beginning of the each test the battery was fully charged.

DASY4 system measures power drift during SAR testing by comparing e-field in the same location at the beginning and at the end of measurement. These records were used to monitor stability of power output.

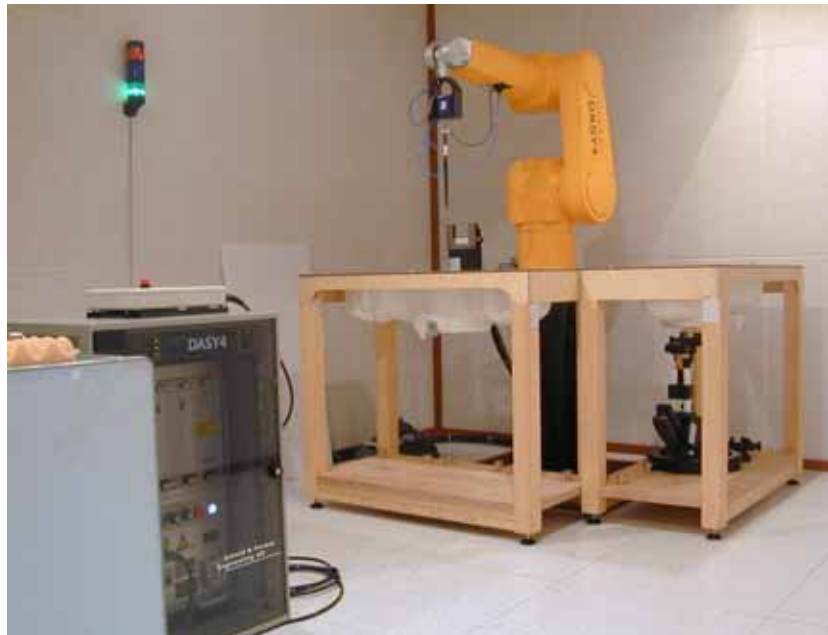


Fig. 4.1 SAR Measurement System



5. DESCRIPTION OF THE TEST EQUIPMENT

An SAR measurement system usually consists of a small diameter isotropic electric field probe, a multiple axis probe positioning system, a test device holder, one or more phantom models, the field probe instrumentation, a computer and other electronic equipment for controlling the probe and making the measurements. Other supporting equipment, such as a network analyzer, power meters and RF signal generators, are also required to measure the dielectric parameters of the simulated tissue media and to verify the measurement accuracy of the SAR system.

5.1 Test System Specifications

Test Equipment	Model	Serial Number	Cal. date
DAE	DAE3	551	2004-04-28
E-Field Probe	ET3DV6	1750	2006-01-24
Dipole validation kit	D1900V2	5d058	2005-01-27
Network analyzer	8753ES	NONE	2005-10-17
Signal generator	E4421B	GB40052295	2005-03-03
RF Power meter	EPM-442A	GB37170412	2005-10-05
Power Sensor	8481A	3318A90368	2005-10-05
RF Power meter	E4418A	GB38272722	2005-03-03
Power Sensor	8481A	3318A96478	2005-03-03
Dielectric Probe	85070D	US01440154	-

5.2 SAR Measurement Setup

Measurement are performed using the DASY4 dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG(SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium IV computer, near-field probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field(EMF) (see Fig. 5.1) A cell controller system contains the power supply, robot controller, teach pendant(Joystick), and a remote control used to drive the robot motors. The pc consists of the Intel Pentium IV 2.4 GHz computer with Windows2000 system and SAR measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc.



5. DESCRIPTION OF THE TEST EQUIPMENT(continued)

Is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

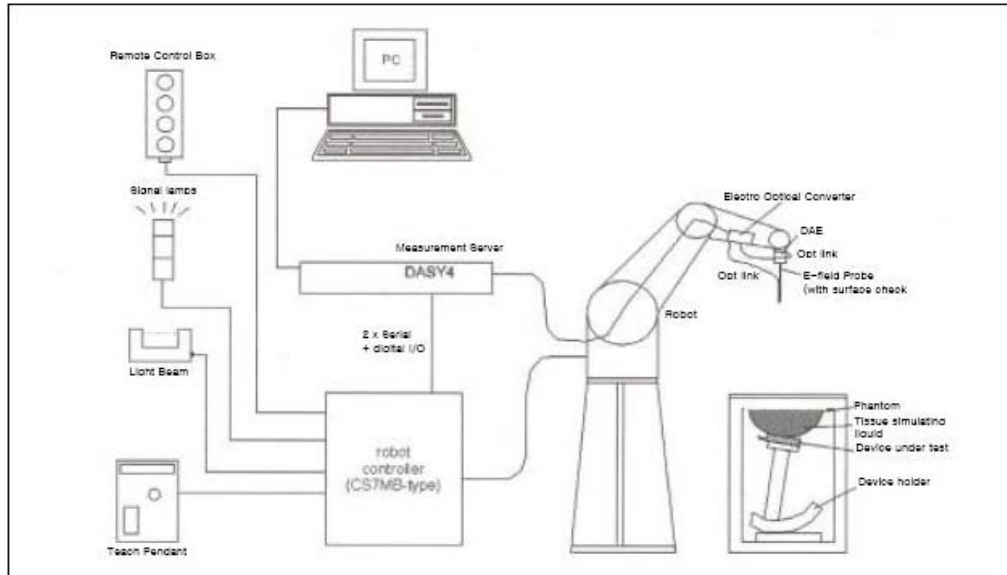


Fig. 5.1 SAR Measurement System Setup

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gainswitching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

5.3 DASY4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration [7] (see Fig.5.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box in the robot arm and provides an automatic detection transmitter, the other half to a synchronized receiver.



5. DESCRIPTION OF THE TEST EQUIPMENT(continued)

As the probe approach the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches coupling is zero. The distance of the coupling maximum to the surface is probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Table. 5.2). The approach is stopped at reaching the maximum.

 Isotropic E-Field Probe	Isotropic E-Field Probe for Dosimetric Measurements	
	Construction	Symmetrical design with triangular core Interleafed sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycol)
	Calibration	In air from 10 MHz to 3 GHz In brain and muscle simulating tissue at frequencies of 450 MHz, 900 MHz and 1.8 GHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request
	Frequency	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
	Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.3 dB in brain tissue (rotation normal to probe axis)
	Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
	Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm Distance from probe tip to dipole centers: 2.7 mm

Fig. 5.2 Probe Specifications



5. DESCRIPTION OF THE TEST EQUIPMENT(continued)

5.4 Phantom & Equivalent Tissues

SAM Phantom

The SAM Twin Phantom V4.0 is constructed of the fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Head & Muscle simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose(HEC) gelling agent and saline solution (see Table 5.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations The mixture characterizations used for the brain and muscle tissue simulation liquids are according to the data by C. Gabriel and G. Hartagrove [13]. (see Fig. 5.3)

Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.8
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.9	55.2	0.97
900	41.5	0.97	55	1.05
915	41.5	0.98	55	1.06
1450	40.5	1.2	54	1.3
1610	40.3	1.29	53.8	1.4
1800-2000	40	1.4	53.3	1.52
2450	39.2	1.8	52.7	1.95
3000	38.5	2.4	52	2.73
5800	35.3	5.27	48.2	6

Fig.5.3 Head and body tissue parameters by the IEEE SCC-34/SC-2 in P1528

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204**5. DESCRIPTION OF THE TEST EQUIPMENT(continued)**

835MHz			1900MHz		
	Head	Body		Head	Body
Sugar	47.31%	34.31%	DGBE(diethylene Glycol buty Ether)	44.91%	29.96%
Deionized water	51.07%	65.45%	Deionized water	54.88%	69.91%
Salt	1.15%	0.62%	Salt	0.21%	0.13%
HEC (hydroxyethyl cellulose)	0.24%				
Preventol	0.24%	0.10%			
ϵ	$41.0 \pm 5\%$	$55.2 \pm 5\%$	ϵ	$40.0 \pm 5\%$	$53.3 \pm 5\%$
σ	$0.89 \pm 10\%$	$0.97 \pm 10\%$	σ	$1.45 \pm 10\%$	$1.52 \pm 10\%$

Fig. 5.4 Composition of the Tissue Equivalent Matter**Device Holder for Transmitters**

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the accurately, and repeatably be positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

Note : A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [12]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



6. DESCRIPTION OF THE TEST PROCEDURE

6.1 Definition of Reference Point

EAR Reference point

The point “M” is the reference point for the center of the mouth, “ERP” is the ear reference point. The ERP are 15mm posterior to the entrance to the ear canal(EEC) along the B-M line (Back-Mouth), as shown is figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the ERP is called the Reference Pivoting Line (see Figure 6.1) B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

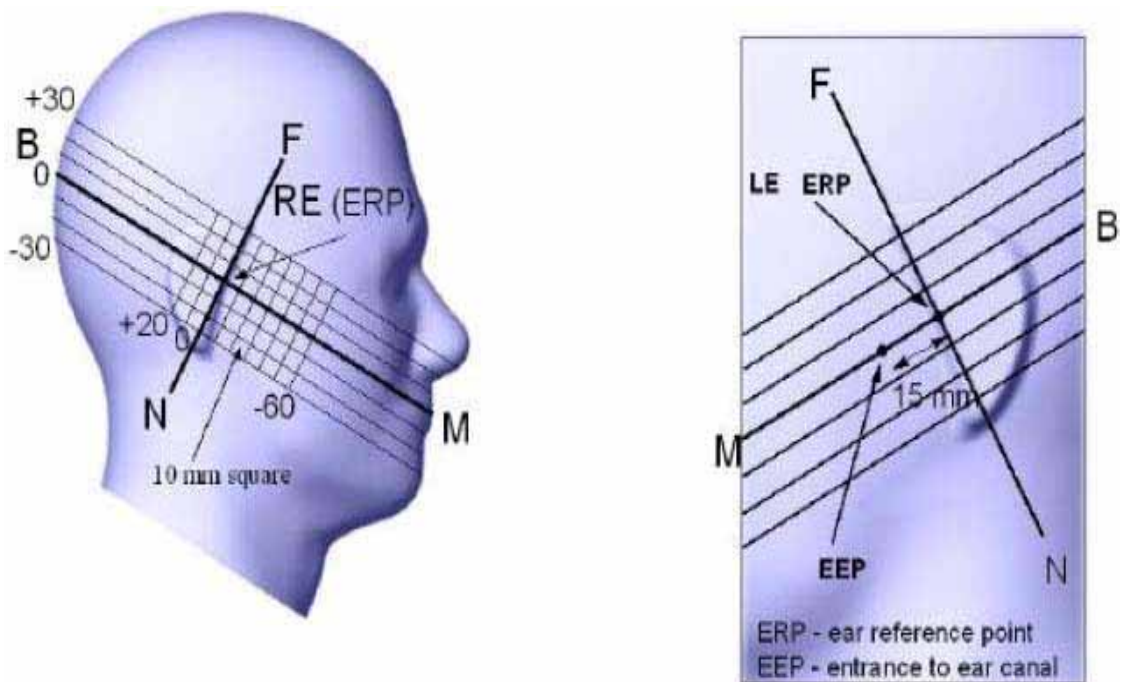


Figure 6.1 Close-up side view of ERP

Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 6.2). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at it’s top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

6. DESCRIPTION OF THE TEST PROCEDURE(continued)

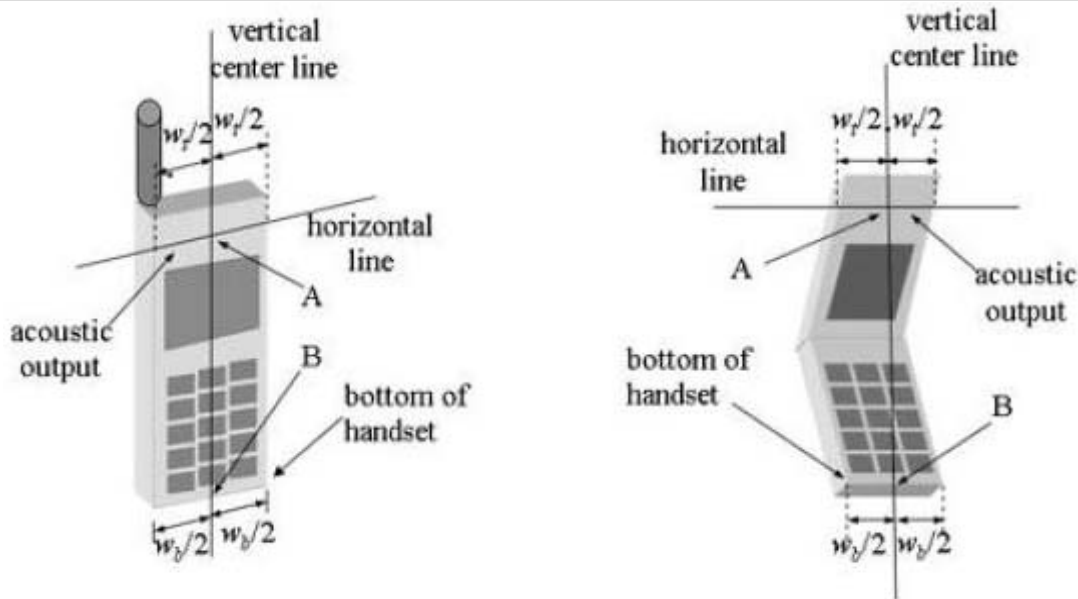


Figure 6.2 Handset Vertical Center & Horizontal Line Reference Points

6.2 Test Configuration Positions

Positioning for Cheek/Touch

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover . (If the phone can also be used with the cover closed ,both configurations must be tested.)
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 6.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2), especially for clamshell handsets, handsets with lip pieces, and other irregularly-shaped handsets.
- 3) Position the handset close to the surface of the phantom touch that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.3), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

6. DESCRIPTION OF THE TEST PROCEDURE(continued)

- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point

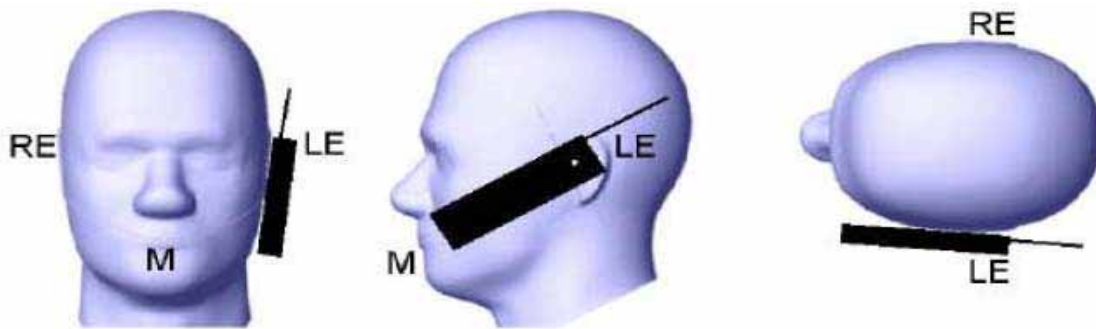


Figure 6.3 "Cheek" or "Touch" Position.

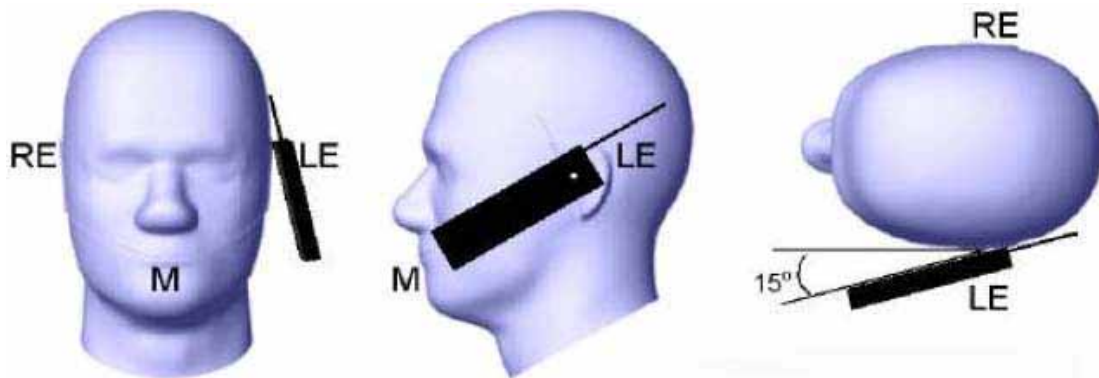


Figure 6.4 "Tilted" Position.



6. DESCRIPTION OF THE TEST PROCEDURE(continued)

Positioning for Ear / 15° Tilted

- 1) Repeat steps 1 to 7 of 6.2(Positioning for Cheek/Touch) to place the device in the "cheek position."
- 2) While maintaining the orientation of the phone retract the phone parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
- 3) Rotate the phone around the horizontal line by 15 degree.
- 4) While maintaining the orientation of the phone, move the phone parallel to the reference plane until any part of the phone touches the head. (In this position, point A will be located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the phone shall be reduced. The tilted position is obtained if any part of the phone is in contact of the ear as well as a second part of the phone is contact with the head.

Body Holder / Belt Clip Configurations

Body-worn operation configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied of available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration. In all case SAR measurements are performed to investigate the worst case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operation requirements for meeting RF exposure compliance, operation instructing instructions and cautions statements are included in the user's manual.



6. DESCRIPTION OF THE TEST PROCEDURE(continued)

6.3 Scan Procedures

First coarse scans are used for quick determination of the field distribution. Nest cube scan, 7x7x7 points; spacing between each point 5x5x5 mm, is performed around the highest E-field value to determine the averaged SAR-distribution over 1g.

6.4 SAR Averaging Methods

The maximum SAR value is averaged over its volume using interpolation and extrapolation.

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a Knot" condition [W.Gander, Computermathematik, p. 141-150](x, y and z directions) [Numerical Recipes in C, Second Edition, p 123].

The extrapolation is based on least square algorithm [W.Gander, Computermathematik, p. 168-180]. Through the points in the first 30 mm in all z-axis, polynomials of order four are calculated. This polynomial is then used to evaluate the points between the surface and the probe tip. The points calculated from the surface, have a distance of 1mm from one another.



7. MEASUREMENT UNCERTAINTY

According to CENELEC [17], typical worst-case uncertainty of field measurements is 5 dB.

For well-defined modulation characteristics the uncertainty can be reduced to 3 dB.

ERROR Description	Uncertainty	Probability	Divisor	ci 1	Standard unc.	vi or
	value ±%	Distribution		1g	(1g)	Veff
MEASUREMENT SYSTEM						
Probe Calibration	± 11.7 %	normal	1	1	± 4.8 %	∞
Axial Isotropy	± 4.7	rectangular	√ 3	(1-cp) ^{1/2}	± 1.9%	∞
Hemispherical Isotropy	± 9.6	rectangular	√ 3	(cp) ^{1/2}	± 3.9%	∞
Boundary Effects	± 1.0	rectangular	√ 3	1	± 0.6%	∞
Linearity	± 4.7	rectangular	√ 3	1	± 2.7%	∞
System Detection Limits	± 1.0	rectangular	√ 3	1	± 0.6%	∞
Readout Electronics	± 1.0	normal	1	1	± 1.0%	∞
Response time	± 0.8	rectangular	√ 3	1	± 0.5%	∞
Integration time	± 2.6	rectangular	√ 3	1	± 1.5%	∞
RF Amnient Conditions	± 3.0	rectangular	√ 3	1	± 1.7%	∞
Probe Positioner Mechanical Tolerance	± 0.4	rectangular	√ 3	1	± 0.2%	∞
Probe Positioning with respect to Phantom Shell	± 2.9	rectangular	√ 3	1	± 1.7%	∞
Extrapolation, Interpolation and Integration Algorithms for Max. SAR Evaluation	± 1.0	rectangular	√ 3	1	± 0.6%	∞
Test Sample Related						
Test Sample Positioning	± 2.9	normal	1	1	± 2.97%	145
Device Holder Uncertainty	± 3.6	normal	0.84	1	± 3.69%	5
Output Power Validation – SAR drift measurement	± 5.0	rectangular	√ 3	1	± 2.9%	∞
Phantom and Tissue Parameters						
Phantom Uncertainty (shape and thickness tolerances)	± 4.0	rectangular	√ 3	1	± 2.3%	∞
Liquid conductivity Target – tolerance	± 5.0	rectangular	√ 3	0.64	± 1.8%	∞
Liquid Conductivity – measurement uncertainty	± 2.5	normal	1	0.64	± 1.6%	∞
Liquid permittivity Target – tolerance	± 5.0	rectangular	√ 3	0.6	± 1.7%	∞
Liquid Permittivity – measurement uncertainty	± 2.5	normal	1	0.6	± 1.5%	∞
Combined Standard Uncertainty					± 11.32 %	330
Coverage Factor for 95%				K = 2		
Expanded Standard Uncertainty					± 22.64 %	



8. SYSTEM VERIFICATION

Tissue Verification

Table 8.1 Simulated Tissue Verification [5]

MEASURED TISSUE PARAMETERS										
Liquid Temperature (°C)		22		Liquid Depth(mm)		150				
Date	2006-3-2	2006-3-2		2006-2-28		2006-2-28				
Tissue	1900MHz Brain	1900MHz Muscle		835MHz Brain		835MHz Muscle				
	Target	Measured	Target	Measured	Target	Measured	Target	Measured		
Dielectric Constant: ϵ	40	39.5	53.3	51.6	41.5	40.3	55.2	53		
Conductivity: σ	1.45	1.4	1.52	1.52	0.9	0.9	0.97	0.983		
Deviation (%)	ϵ : -1.25%		ϵ : -3.19%		ϵ : -2.89%		ϵ : -3.99%			
	σ : -3.45%		σ : 0.00%		σ : 0.00%		σ : 1.34%			

Test System Validation

- Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835MHz,1900MHz (Graphic Plots Attached)
- The results are nominalized to 1W input power

Table 8.2 System Validation [5]

SYSTEM DIPOLE VALIDATION TARGET & MEASURED						
Tissue	System Validation Kit:	Forward Power (mW)	Targeted SAR1g (mW/g)	Measured SAR1g (mW/g)	Deviation (%)	Test Date
1900MHz Brain	D1900V2(S/N :5d058)	1.0	39.2	38.64	1.43%	2006-3-2
835MHz Brain	D835V2(S/N :475)	1.0	9.5	9.4	1.05%	2006-2-28

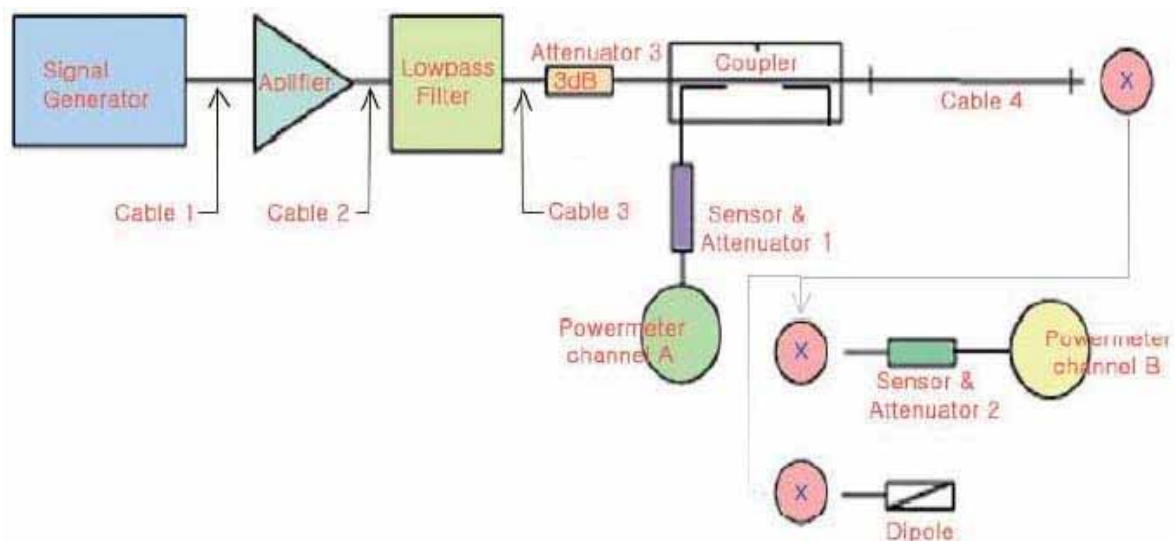


Figure 12.1 Dipole Validation Test Setup



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

9. RESULTS(continued)

Ambient TEMPERATURE (C) : 22.0

Relative HUMIDITY (%) : 48

Mixture Type : 835MHz Brain

Dielectric Constant : 40.3

Conductivity: 0.9

Measurement Results (GSM Head SAR-Touch)

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Brain 1.6 W/kg (mW/g) averaged over 1 gram
---	--

MEASUREMENT RESULTS (GSM Left Head SAR – Touch)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
824.20	128	GSM	33.00	33.02	Standard	Cheek Touch	–	1.190
836.60	190	GSM	33.00	32.92	Standard	Cheek Touch	–	1.110
848.80	251	GSM	33.00	32.89	Standard	Cheek Touch	–	1.170

MEASUREMENT RESULTS (GSM Right Head SAR – Touch)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
824.20	128	GSM	33.00	32.91	Standard	Cheek Touch	–	1.180
836.60	190	GSM	33.00	33.02	Standard	Cheek Touch	–	1.060
848.80	251	GSM	33.00	32.96	Standard	Cheek Touch	–	1.160

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.

2. All modes of operation were investigated and the worst-case are reported.

3. Battery Type : Standard

Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.

4. Power Measured : Conducted

5. SAR Measurement System : SPEAG

6. SAR Configuration : Head

Engineer K.H.Kang

(Signature)

Test report no : ESTSAR0603-001

FCC ID : BEJMG185

Web : www.estech.co.kr

Page 19 of 25

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204**9. RESULTS(continued)**Ambient TEMPERATURE (C) : **22.0**Relative HUMIDITY (%) : **48**Mixture Type : **835MHz Brain**Dielectric Constant : **40.3**Conductivity: **0.9****Measurement Results (GSM Head SAR-Tilt)**

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Brain 1.6 W/kg (mW/g) averaged over 1 gram
---	--

MEASUREMENT RESULTS (GSM Left Head SAR – Tilt)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
836.60	190	GSM	33.00	32.93	Standard	Tilt	–	0.705

MEASUREMENT RESULTS (GSM Right Head SAR – Tilt)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
836.60	190	GSM	33.00	32.98	Standard	Tilt	–	0.661

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : **Standard**
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : **Conducted**
5. SAR Measurement System : **SPEAG**
6. SAR Configuration : **Head**

Engineer K.H.Kang

(Signature) 

Test report no : ESTSAR0603-001

FCC ID : BEJMG185

Web : www. estech. co. kr

Page 20 of 25



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

9. RESULTS(continued)

Ambient TEMPERATURE (C) : 21

Relative HUMIDITY (%) : 49

Mixture Type : 835MHz Body

Dielectric Constant : 53.0

Conductivity: 0.983

Measurement Results (GSM BODY SAR without Holster)

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Body 1.6 W/kg (mW/g) averaged over 1 gram
---	---

MEASUREMENT RESULTS (GSM Body SAR Without Holster)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
824.20	128	GSM	33.00	32.97	Standard	1.5[w/o Holster]	—	1.230
836.60	190	GSM	33.00	32.94	Standard	1.5[w/o Holster]	—	1.150
848.80	251	GSM	33.00	32.88	Standard	1.5[w/o Holster]	—	1.130

MEASUREMENT RESULTS (GSM Body SAR Without Holster – GPRS)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
824.20	128	GSM	33.00	33.00	Standard	1.5[w/o Holster]	—	0.983

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : Standard
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : Conducted
5. SAR Measurement System : SPEAG
6. SAR Configuration : Body, GPRS mode

Engineer K.H.Kang

(Signature)

Test report no : ESTSAR0603-001

FCC ID : BEJMG185

Web : www.estech.co.kr

Page 21 of 25



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

9. RESULTS(continued)

Ambient TEMPERATURE (C) : 21.0

Relative HUMIDITY (%) : 48

Mixture Type : 1900MHz Brain

Dielectric Constant : 39.5

Conductivity: 1.4

Measurement Results (PCS Head SAR-Touch)

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Brain 1.6 W/kg (mW/g) averaged over 1 gram
---	--

MEASUREMENT RESULTS (PCS Left Head SAR – Touch)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1850.20	512	GSM	30.00	30.08	Standard	Cheek Touch	–	0.391
1880.00	661	GSM	30.00	29.98	Standard	Cheek Touch	–	0.364
1909.80	810	GSM	30.00	29.98	Standard	Cheek Touch	–	0.228

MEASUREMENT RESULTS (PCS Right Head SAR – Touch)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1850.20	512	GSM	30.00	30.02	Standard	Cheek Touch	–	0.378
1880.00	661	GSM	30.00	30.06	Standard	Cheek Touch	–	0.305
1909.80	810	GSM	30.00	29.97	Standard	Cheek Touch	–	0.200

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : Standard
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : Conducted
5. SAR Measurement System : SPEAG
6. SAR Configuration : Head

Engineer K.H.Kang

(Signature)

Test report no : ESTSAR0603-001

FCC ID : BEJMG185

Web : www.estech.co.kr

Page 22 of 25



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

9. RESULTS(continued)

Ambient TEMPERATURE (C) : 21.0

Relative HUMIDITY (%) : 48

Mixture Type : 1900MHz Brain

Dielectric Constant : 39.5

Conductivity: 1.4

Measurement Results (PCS Head SAR-Tilt)

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Brain 1.6 W/kg (mW/g) averaged over 1 gram
---	--

MEASUREMENT RESULTS (PCS Left Head SAR – Tilt)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1880.00	661	GSM	30.00	30.02	Standard	Tilt	–	0.264

MEASUREMENT RESULTS (PCS Right Head SAR – Tilt)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1880.00	661	GSM	30.00	30.02	Standard	Tilt	–	0.234

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : Standard
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : Conducted
5. SAR Measurement System : SPEAG
6. SAR Configuration : Head

Engineer K.H.Kang

(Signature)

Test report no : ESTSAR0603-001

FCC ID : BEJMG185

Web : www.estech.co.kr

Page 23 of 25

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204**9. RESULTS(continued)**Ambient TEMPERATURE (C) : **21**Relative HUMIDITY (%) : **48**Mixture Type : **1900MHz Body**Dielectric Constant : **51.6**Conductivity: **1.52****Measurement Results (PCS BODY SAR without Holster)**

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Body 1.6 W/kg (mW/g) averaged over 1 gram
---	---

MEASUREMENT RESULTS (PCS Body SAR Without Holster)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1850.20	512	GSM	30.00	30.08	Standard	1.5[w/o Holster]	—	0.366
1880.00	661	GSM	30.00	29.98	Standard	1.5[w/o Holster]	—	0.252
1909.80	810	GSM	30.00	30.03	Standard	1.5[w/o Holster]	—	0.194

MEASUREMENT RESULTS (PCS Body SAR Without Holster – GPRS)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1850.20	512	GSM	30.00	30.03	Standard	1.5[w/o Holster]	—	0.343

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : **Standard**
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : **Conducted**
5. SAR Measurement System : **SPEAG**
6. SAR Configuration : **Body**

Engineer K.H.Kang

(Signature) 

Test report no : ESTSAR0603-001

FCC ID : BEJMG185

Web : www. estech. co. kr

Page 24 of 25



10. REFERENCE

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 – 1991, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Aug. 1992
- [3] ANSI/IEEE C95.3 – 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.
- [4] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [5] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [6] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [7] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [8] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [9] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [10] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [11] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [12] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [13] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [14] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [15] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to RadioFrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [16] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [17] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [18] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

APPENDIX A : Validation Test Data of Tissue




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- GSM850 Head Tissue

Title
SubTitle

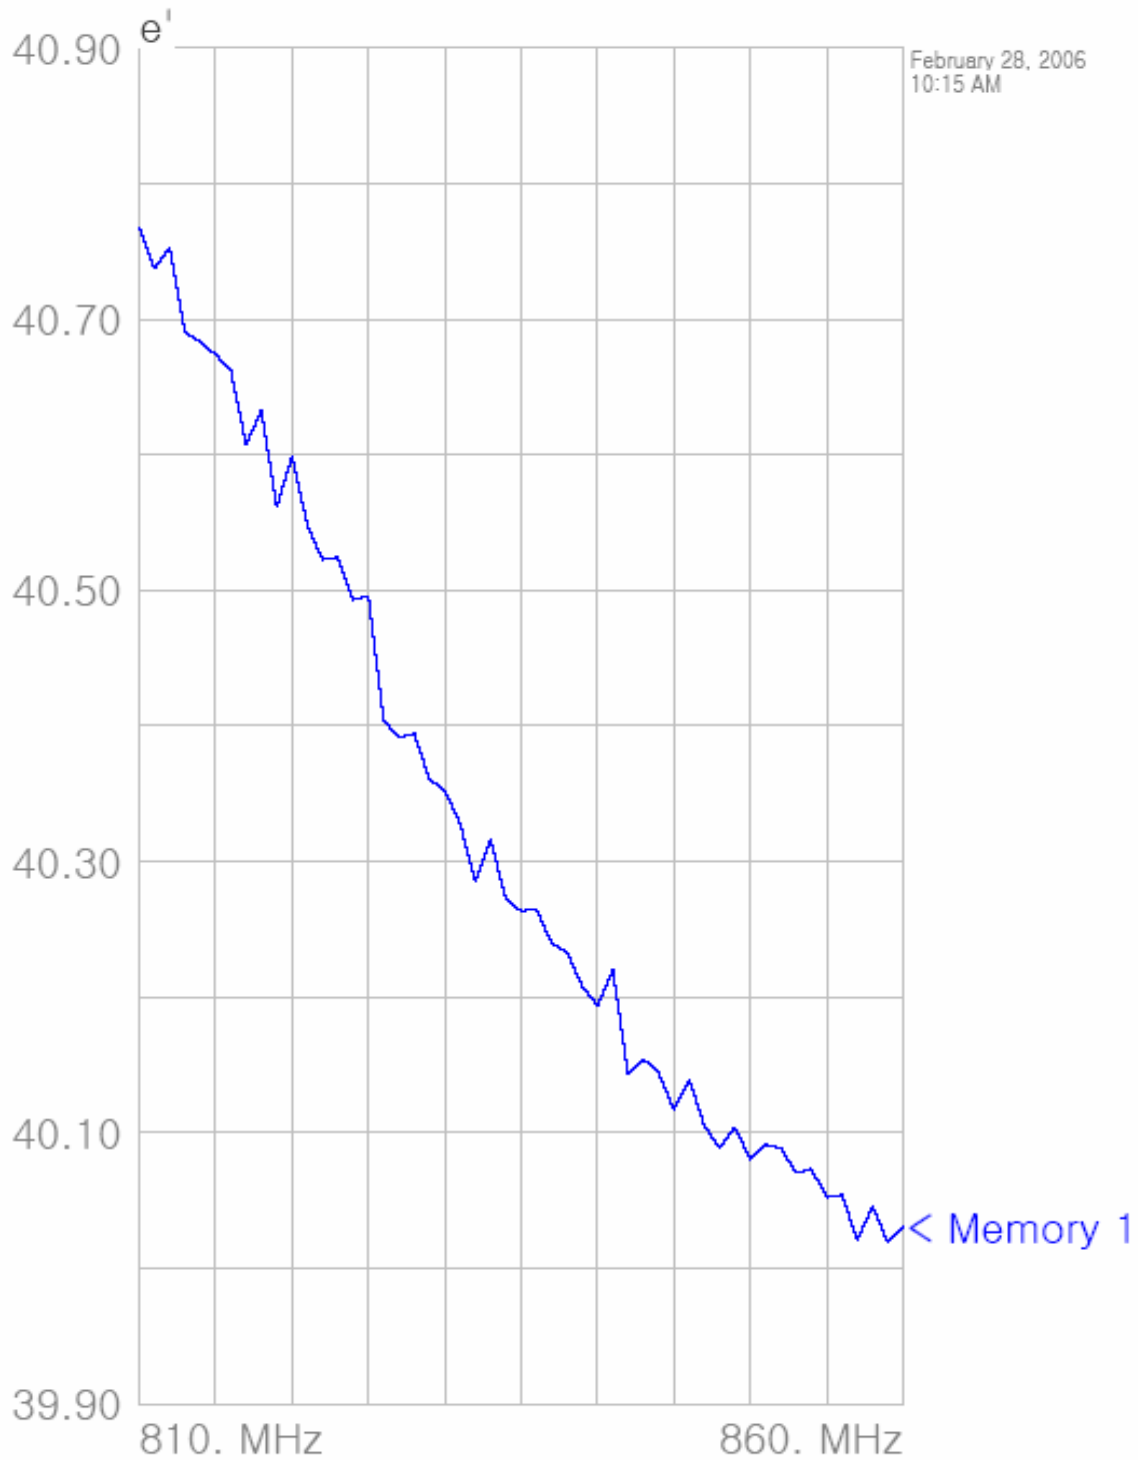




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title

SubTitle

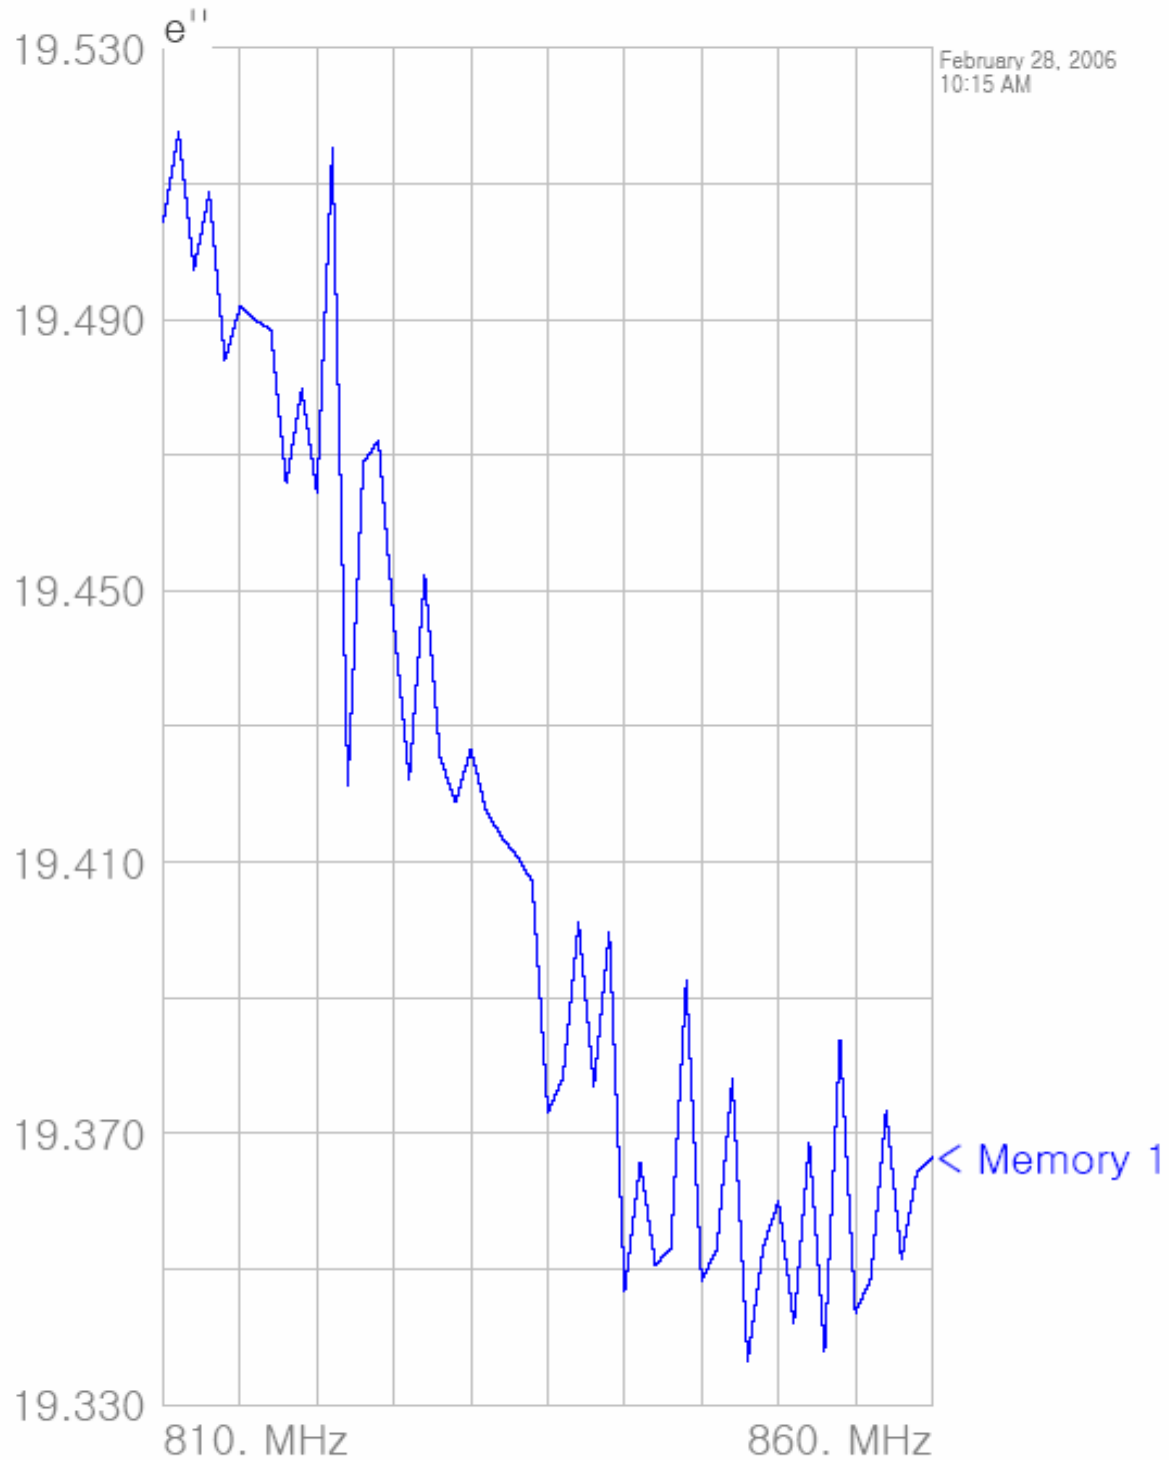

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

February 05, 2005 10:15 AM

Frequency	e'	e''
810.000000 MHz	40.7673	19.5043
811.000000 MHz	40.7376	19.5176
812.000000 MHz	40.7529	19.4974
813.000000 MHz	40.6907	19.5087
814.000000 MHz	40.6833	19.4840
815.000000 MHz	40.6739	19.4919
816.000000 MHz	40.6619	19.4899
817.000000 MHz	40.6075	19.4885
818.000000 MHz	40.6328	19.4658
819.000000 MHz	40.5612	19.4798
820.000000 MHz	40.5992	19.4644
821.000000 MHz	40.5484	19.5154
822.000000 MHz	40.5227	19.4214
823.000000 MHz	40.5244	19.4689
824.000000 MHz	40.4930	19.4722
825.000000 MHz	40.4959	19.4451
826.000000 MHz	40.4046	19.4222
827.000000 MHz	40.3913	19.4524
828.000000 MHz	40.3944	19.4254
829.000000 MHz	40.3607	19.4188
830.000000 MHz	40.3521	19.4267
831.000000 MHz	40.3283	19.4175
832.000000 MHz	40.2851	19.4137
833.000000 MHz	40.3158	19.4109
834.000000 MHz	40.2727	19.4071
835.000000 MHz	40.2634	19.3731
836.000000 MHz	40.2648	19.3783
837.000000 MHz	40.2396	19.4011
838.000000 MHz	40.2331	19.3770
839.000000 MHz	40.2080	19.3998
840.000000 MHz	40.1936	19.3466
841.000000 MHz	40.2198	19.3658
842.000000 MHz	40.1429	19.3506
843.000000 MHz	40.1542	19.3531
844.000000 MHz	40.1443	19.3925
845.000000 MHz	40.1170	19.3483
846.000000 MHz	40.1392	19.3530
847.000000 MHz	40.1050	19.3782
848.000000 MHz	40.0887	19.3364
849.000000 MHz	40.1040	19.3532
850.000000 MHz	40.0804	19.3600
851.000000 MHz	40.0913	19.3419
852.000000 MHz	40.0887	19.3687
853.000000 MHz	40.0704	19.3379
854.000000 MHz	40.0732	19.3838
855.000000 MHz	40.0523	19.3436
856.000000 MHz	40.0542	19.3485
857.000000 MHz	40.0205	19.3735
858.000000 MHz	40.0458	19.3515
859.000000 MHz	40.0191	19.3643
860.000000 MHz	40.0306	19.3665




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

– GSM850 Body Tissue

Title
SubTitle

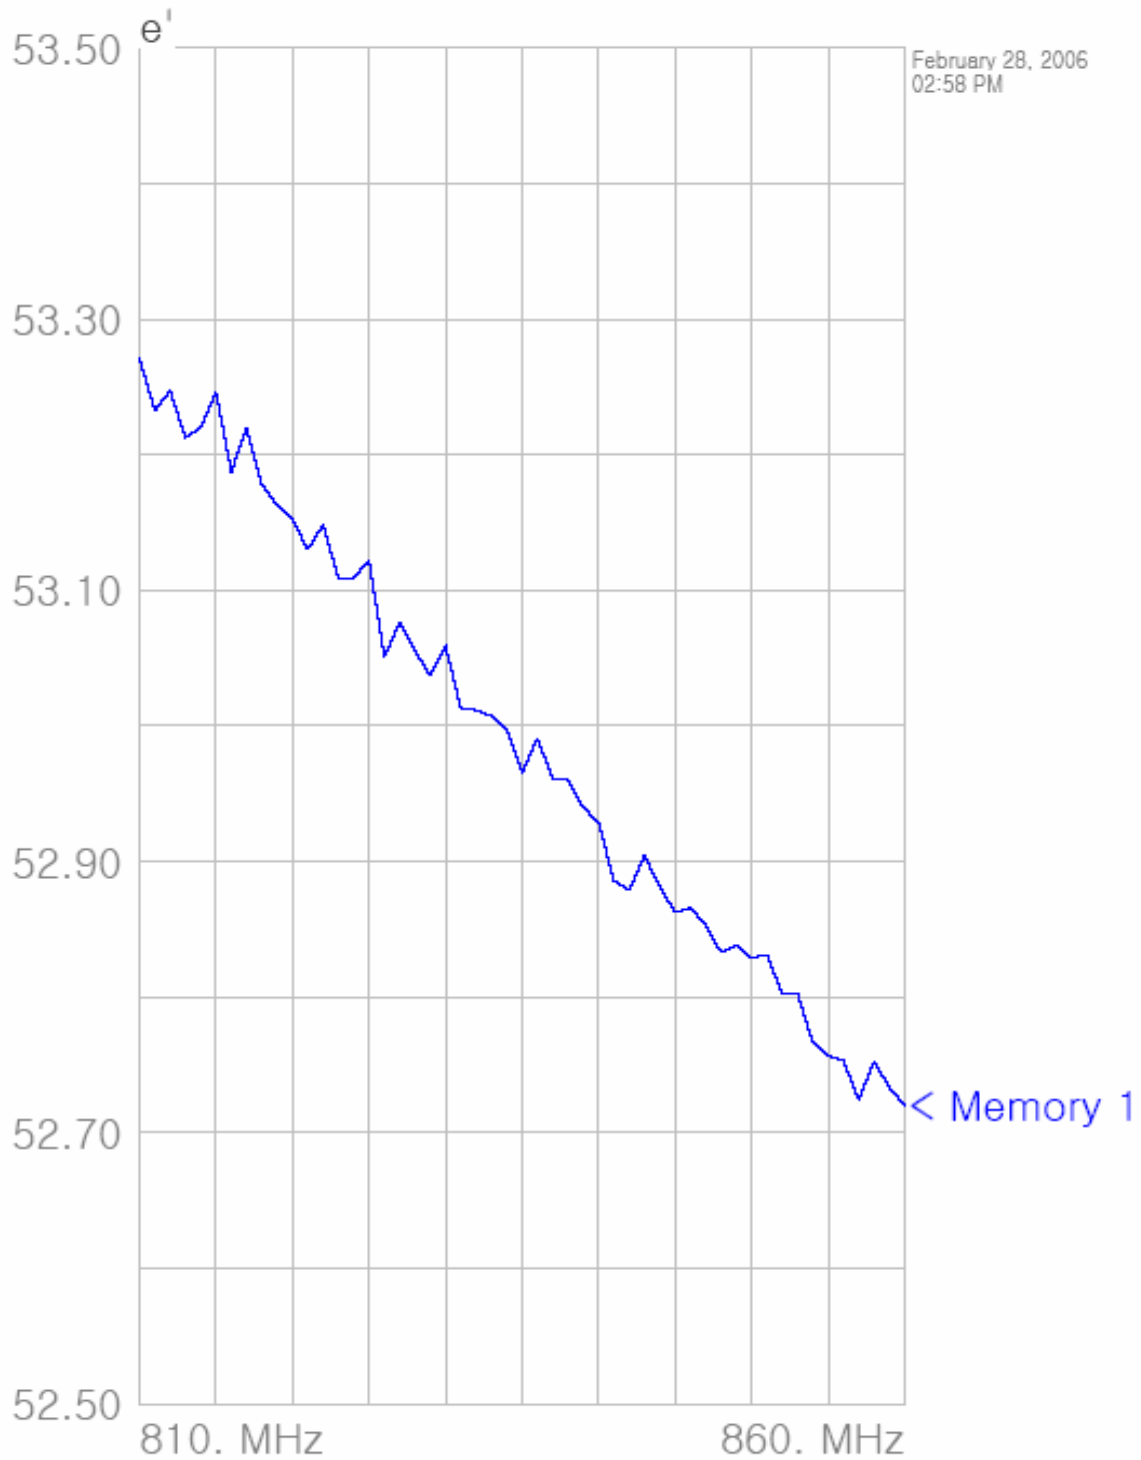




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title

SubTitle

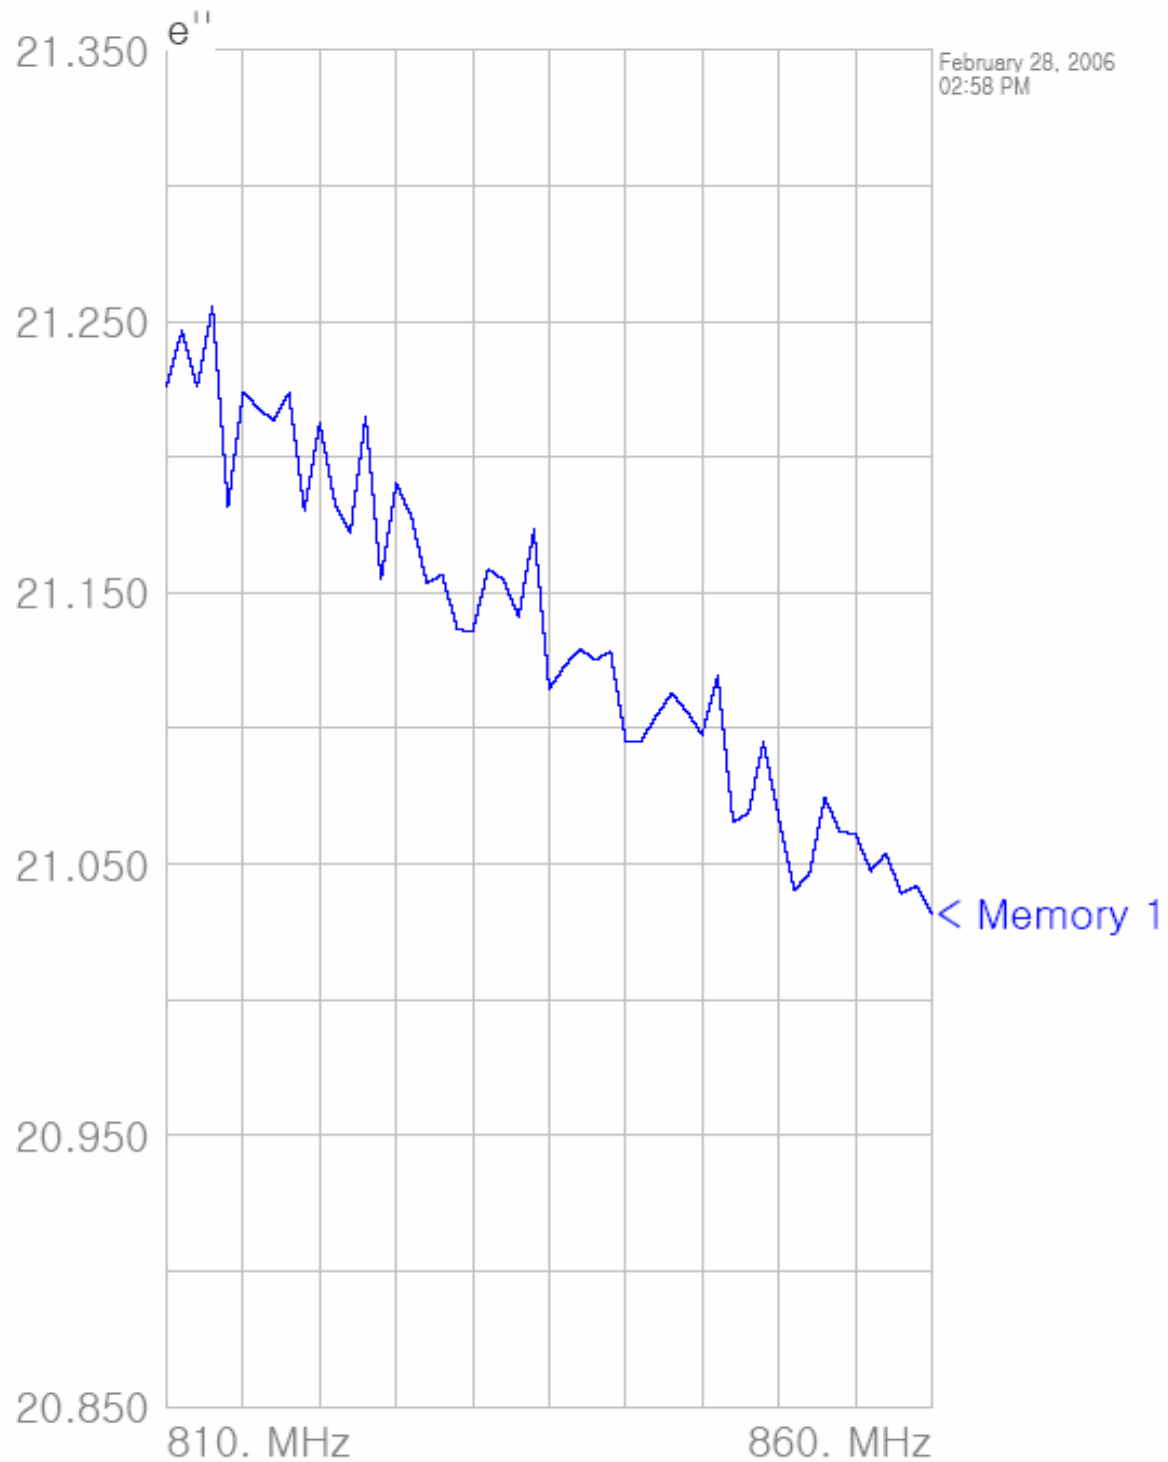

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

February 05, 2005 02:58 PM

Frequency	e'	e''
810.000000 MHz	53.2709	21.2264
811.000000 MHz	53.2326	21.2466
812.000000 MHz	53.2474	21.2258
813.000000 MHz	53.2128	21.2559
814.000000 MHz	53.2201	21.1817
815.000000 MHz	53.2460	21.2242
816.000000 MHz	53.1876	21.2179
817.000000 MHz	53.2194	21.2135
818.000000 MHz	53.1781	21.2236
819.000000 MHz	53.1627	21.1800
820.000000 MHz	53.1519	21.2129
821.000000 MHz	53.1301	21.1828
822.000000 MHz	53.1485	21.1719
823.000000 MHz	53.1083	21.2151
824.000000 MHz	53.1092	21.1548
825.000000 MHz	53.1220	21.1903
826.000000 MHz	53.0511	21.1779
827.000000 MHz	53.0760	21.1536
828.000000 MHz	53.0552	21.1567
829.000000 MHz	53.0372	21.1366
830.000000 MHz	53.0592	21.1355
831.000000 MHz	53.0127	21.1588
832.000000 MHz	53.0117	21.1548
833.000000 MHz	53.0072	21.1411
834.000000 MHz	52.9972	21.1734
835.000000 MHz	52.9655	21.1144
836.000000 MHz	52.9911	21.1229
837.000000 MHz	52.9610	21.1294
838.000000 MHz	52.9602	21.1253
839.000000 MHz	52.9400	21.1283
840.000000 MHz	52.9287	21.0952
841.000000 MHz	52.8858	21.0955
842.000000 MHz	52.8789	21.1046
843.000000 MHz	52.9045	21.1129
844.000000 MHz	52.8811	21.1062
845.000000 MHz	52.8625	21.0977
846.000000 MHz	52.8659	21.1195
847.000000 MHz	52.8527	21.0656
848.000000 MHz	52.8330	21.0685
849.000000 MHz	52.8381	21.0949
850.000000 MHz	52.8289	21.0669
851.000000 MHz	52.8311	21.0402
852.000000 MHz	52.8020	21.0465
853.000000 MHz	52.8025	21.0746
854.000000 MHz	52.7666	21.0618
855.000000 MHz	52.7567	21.0612
856.000000 MHz	52.7530	21.0475
857.000000 MHz	52.7242	21.0539
858.000000 MHz	52.7525	21.0393
859.000000 MHz	52.7333	21.0421
860.000000 MHz	52.7202	21.0319




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

– PCS1900 Head Tissue

Title
SubTitle

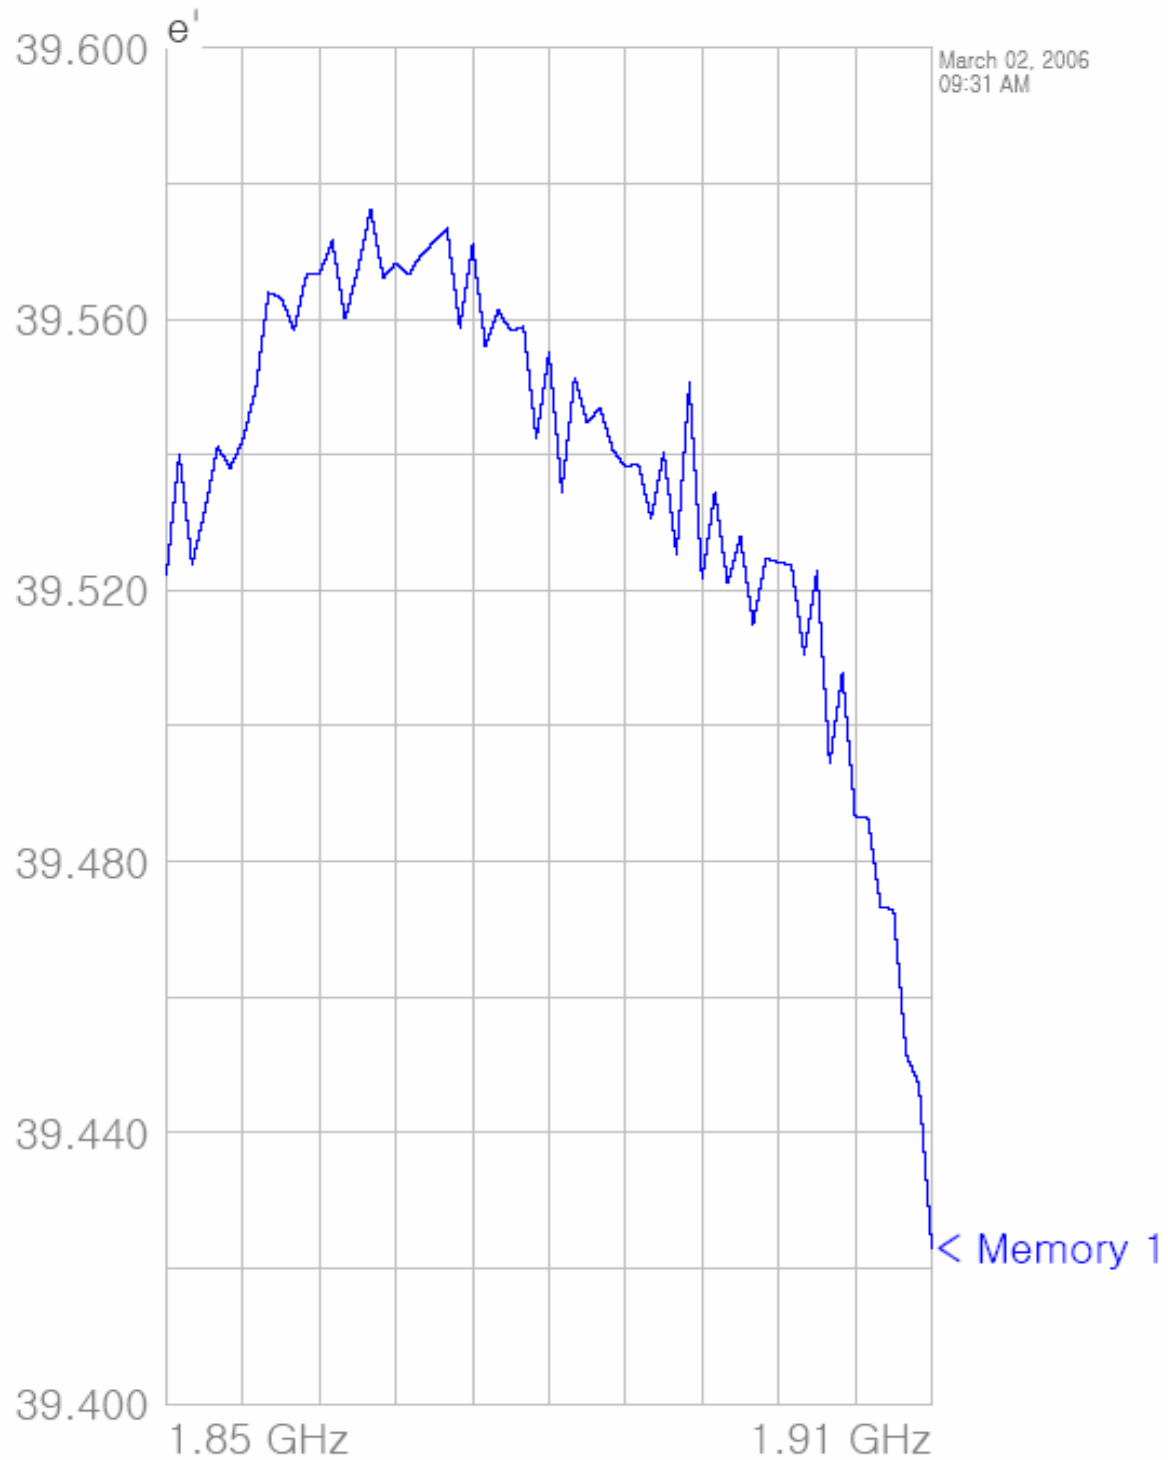




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

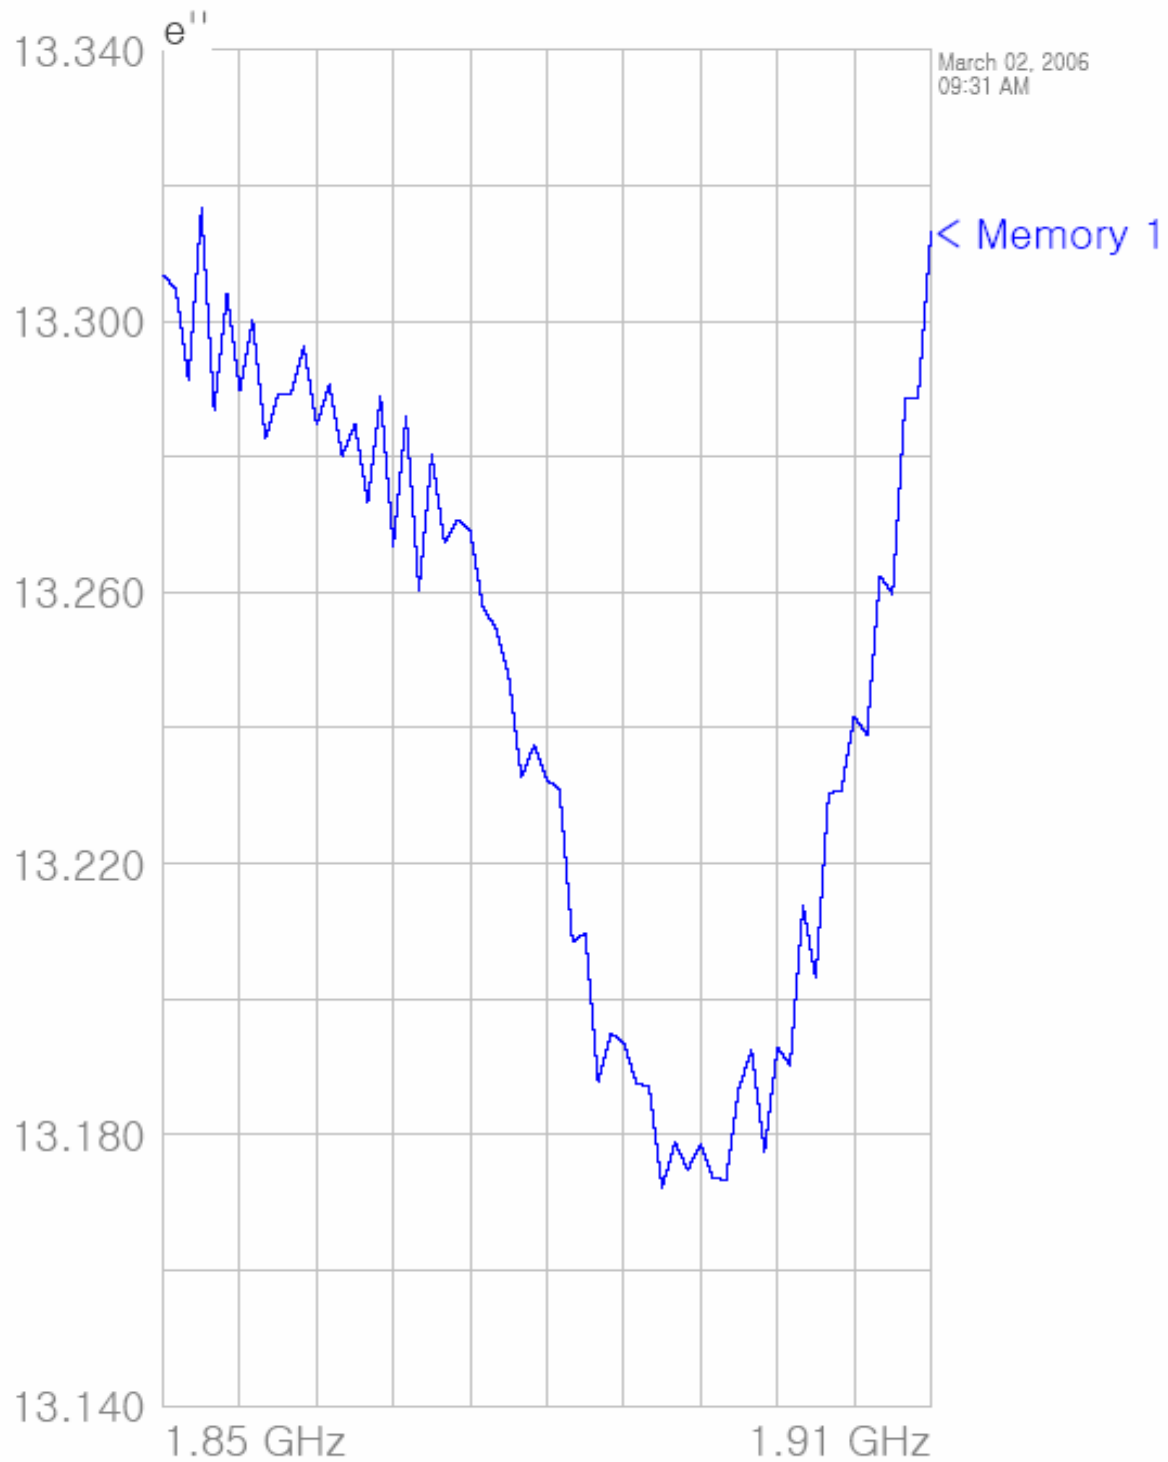

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201

FAX: 82-2-867-3204

Title
SubTitle

March 02, 2006 09:31 AM

Frequency	e'	e''
1.850000000 GHz	39.5224	13.3067
1.851000000 GHz	39.5402	13.3049
1.852000000 GHz	39.5239	13.2913
1.853000000 GHz	39.5317	13.3166
1.854000000 GHz	39.5412	13.2869
1.855000000 GHz	39.5381	13.3041
1.856000000 GHz	39.5422	13.2897
1.857000000 GHz	39.5498	13.3002
1.858000000 GHz	39.5639	13.2826
1.859000000 GHz	39.5632	13.2892
1.860000000 GHz	39.5584	13.2894
1.861000000 GHz	39.5668	13.2963
1.862000000 GHz	39.5666	13.2847
1.863000000 GHz	39.5716	13.2907
1.864000000 GHz	39.5601	13.2802
1.865000000 GHz	39.5672	13.2848
1.866000000 GHz	39.5762	13.2734
1.867000000 GHz	39.5661	13.2889
1.868000000 GHz	39.5683	13.2668
1.869000000 GHz	39.5666	13.2860
1.870000000 GHz	39.5696	13.2603
1.871000000 GHz	39.5714	13.2803
1.872000000 GHz	39.5734	13.2673
1.873000000 GHz	39.5588	13.2707
1.874000000 GHz	39.5710	13.2691
1.875000000 GHz	39.5561	13.2578
1.876000000 GHz	39.5613	13.2547
1.877000000 GHz	39.5583	13.2479
1.878000000 GHz	39.5589	13.2327
1.879000000 GHz	39.5423	13.2375
1.880000000 GHz	39.5552	13.2324
1.881000000 GHz	39.5346	13.2308
1.882000000 GHz	39.5514	13.2084
1.883000000 GHz	39.5447	13.2098
1.884000000 GHz	39.5469	13.1878
1.885000000 GHz	39.5407	13.1949
1.886000000 GHz	39.5382	13.1936
1.887000000 GHz	39.5387	13.1876
1.888000000 GHz	39.5306	13.1870
1.889000000 GHz	39.5403	13.1721
1.890000000 GHz	39.5252	13.1789
1.891000000 GHz	39.5506	13.1748
1.892000000 GHz	39.5216	13.1786
1.893000000 GHz	39.5345	13.1735
1.894000000 GHz	39.5210	13.1734
1.895000000 GHz	39.5280	13.1869
1.896000000 GHz	39.5150	13.1924
1.897000000 GHz	39.5247	13.1775
1.898000000 GHz	39.5241	13.1929
1.899000000 GHz	39.5238	13.1903
1.900000000 GHz	39.5105	13.2138
1.901000000 GHz	39.5228	13.2031
1.902000000 GHz	39.4944	13.2304
1.903000000 GHz	39.5079	13.2308
1.904000000 GHz	39.4866	13.2417
1.905000000 GHz	39.4864	13.2390
1.906000000 GHz	39.4732	13.2624
1.907000000 GHz	39.4730	13.2598
1.908000000 GHz	39.4515	13.2886
1.909000000 GHz	39.4471	13.2886
1.910000000 GHz	39.4230	13.3131




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- PCS1900 Body Tissue

Title
SubTitle

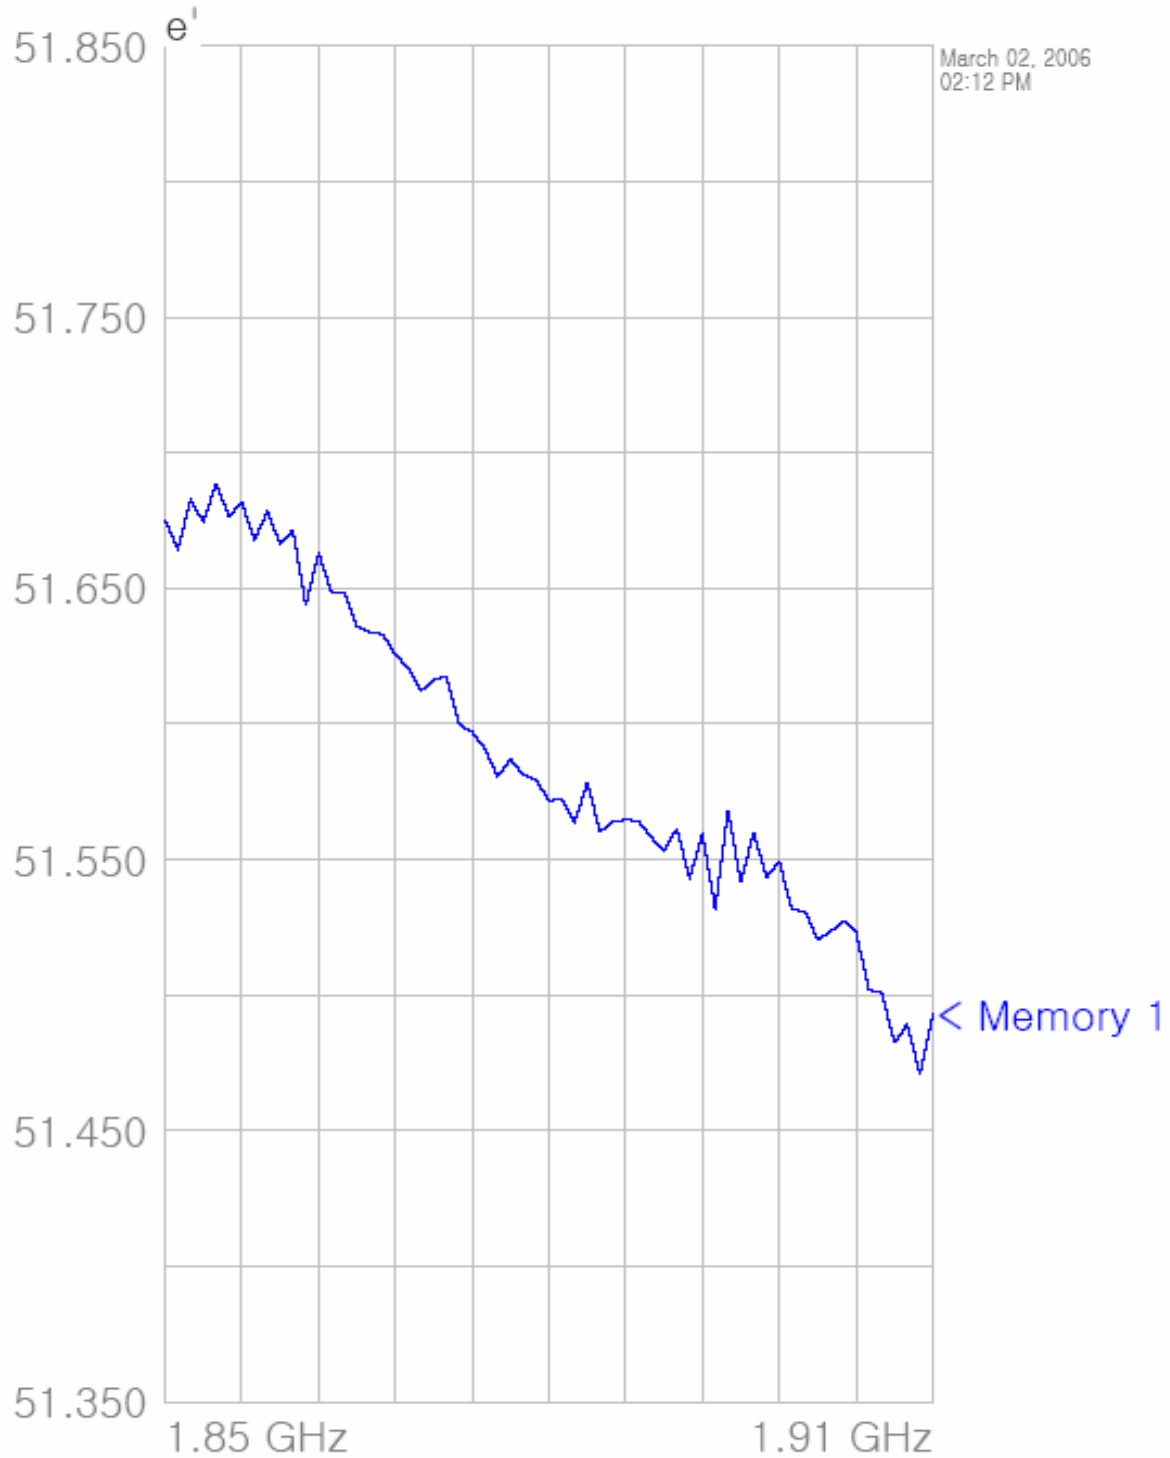




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

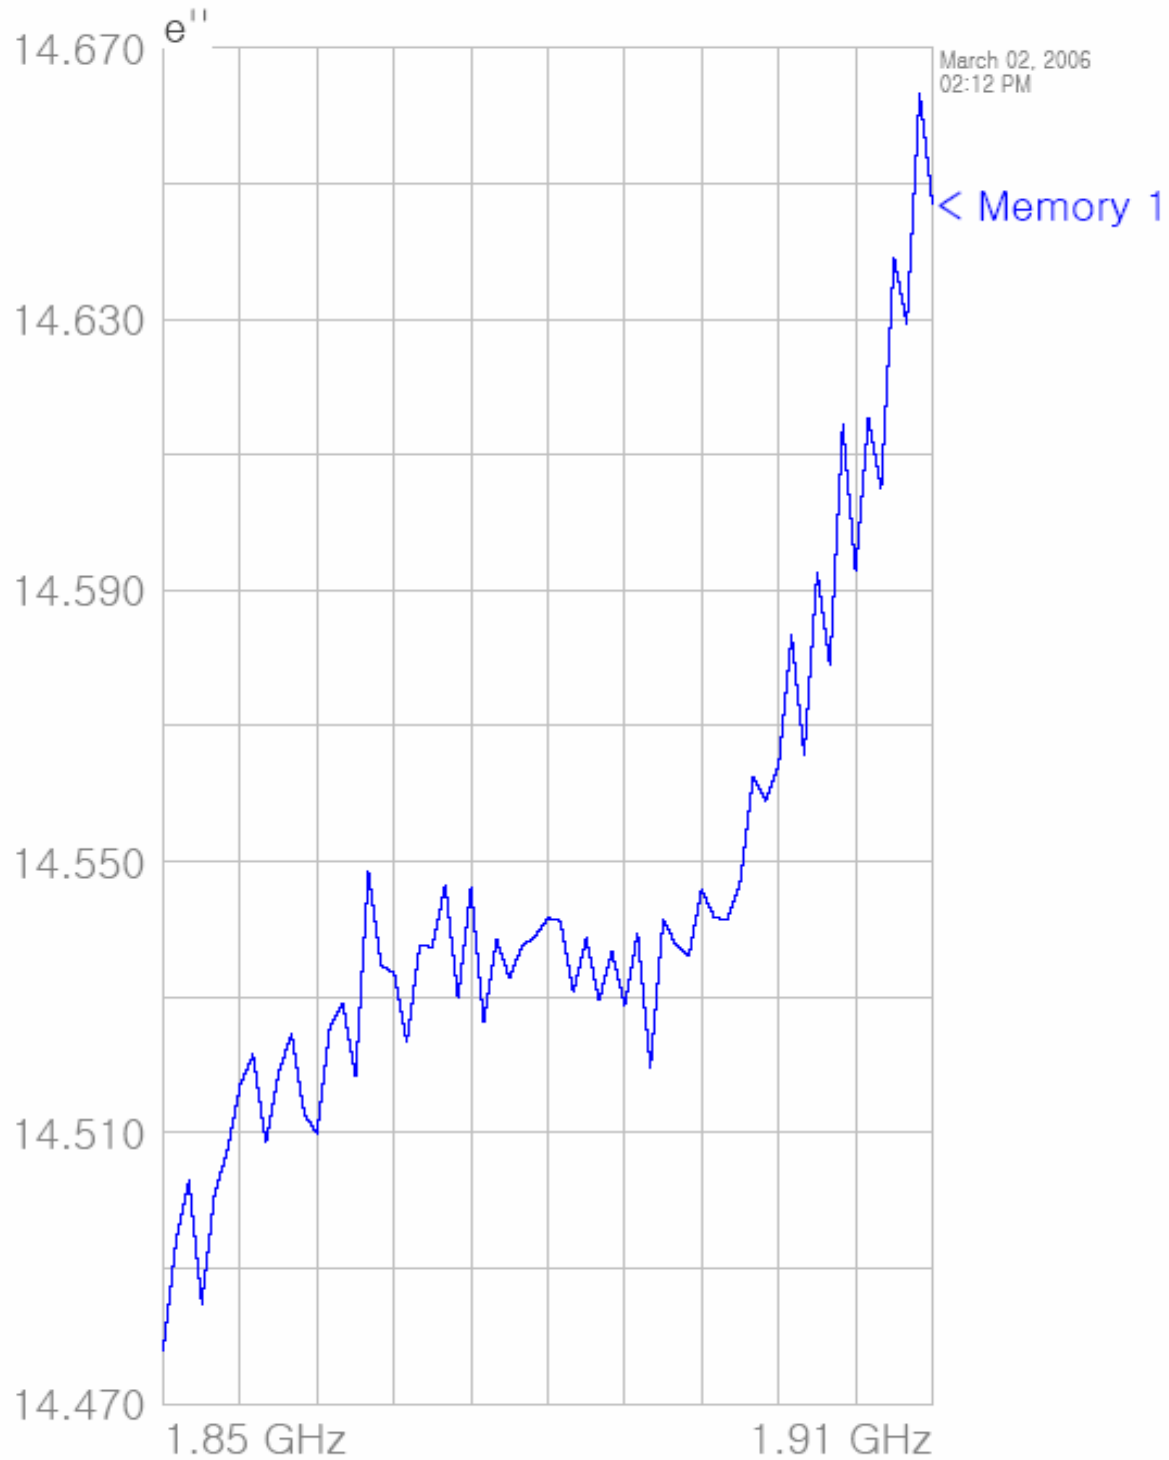



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

March 02, 2006 02:12 PM

Frequency	e'	e''
1.850000000 GHz	51.6752	14.4779
1.851000000 GHz	51.6643	14.4941
1.852000000 GHz	51.6828	14.5029
1.853000000 GHz	51.6745	14.4848
1.854000000 GHz	51.6887	14.5009
1.855000000 GHz	51.6766	14.5074
1.856000000 GHz	51.6817	14.5170
1.857000000 GHz	51.6679	14.5215
1.858000000 GHz	51.6784	14.5085
1.859000000 GHz	51.6662	14.5188
1.860000000 GHz	51.6716	14.5246
1.861000000 GHz	51.6438	14.5127
1.862000000 GHz	51.6631	14.5099
1.863000000 GHz	51.6487	14.5257
1.864000000 GHz	51.6485	14.5291
1.865000000 GHz	51.6360	14.5183
1.866000000 GHz	51.6339	14.5484
1.867000000 GHz	51.6331	14.5346
1.868000000 GHz	51.6256	14.5336
1.869000000 GHz	51.6207	14.5233
1.870000000 GHz	51.6122	14.5376
1.871000000 GHz	51.6162	14.5374
1.872000000 GHz	51.6176	14.5466
1.873000000 GHz	51.5998	14.5298
1.874000000 GHz	51.5970	14.5462
1.875000000 GHz	51.5909	14.5263
1.876000000 GHz	51.5807	14.5385
1.877000000 GHz	51.5870	14.5328
1.878000000 GHz	51.5812	14.5376
1.879000000 GHz	51.5794	14.5389
1.880000000 GHz	51.5718	14.5417
1.881000000 GHz	51.5721	14.5412
1.882000000 GHz	51.5635	14.5307
1.883000000 GHz	51.5784	14.5387
1.884000000 GHz	51.5603	14.5295
1.885000000 GHz	51.5639	14.5368
1.886000000 GHz	51.5647	14.5287
1.887000000 GHz	51.5642	14.5395
1.888000000 GHz	51.5582	14.5196
1.889000000 GHz	51.5533	14.5415
1.890000000 GHz	51.5614	14.5377
1.891000000 GHz	51.5429	14.5360
1.892000000 GHz	51.5596	14.5459
1.893000000 GHz	51.5318	14.5417
1.894000000 GHz	51.5681	14.5414
1.895000000 GHz	51.5417	14.5468
1.896000000 GHz	51.5600	14.5624
1.897000000 GHz	51.5435	14.5589
1.898000000 GHz	51.5492	14.5643
1.899000000 GHz	51.5314	14.5834
1.900000000 GHz	51.5310	14.5657
1.901000000 GHz	51.5203	14.5927
1.902000000 GHz	51.5234	14.5790
1.903000000 GHz	51.5274	14.6144
1.904000000 GHz	51.5234	14.5928
1.905000000 GHz	51.5018	14.6153
1.906000000 GHz	51.5010	14.6051
1.907000000 GHz	51.4825	14.6391
1.908000000 GHz	51.4891	14.6294
1.909000000 GHz	51.4707	14.6634
1.910000000 GHz	51.4928	14.6470



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

APPENDIX B : Validation Test Data




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Dipole Validation

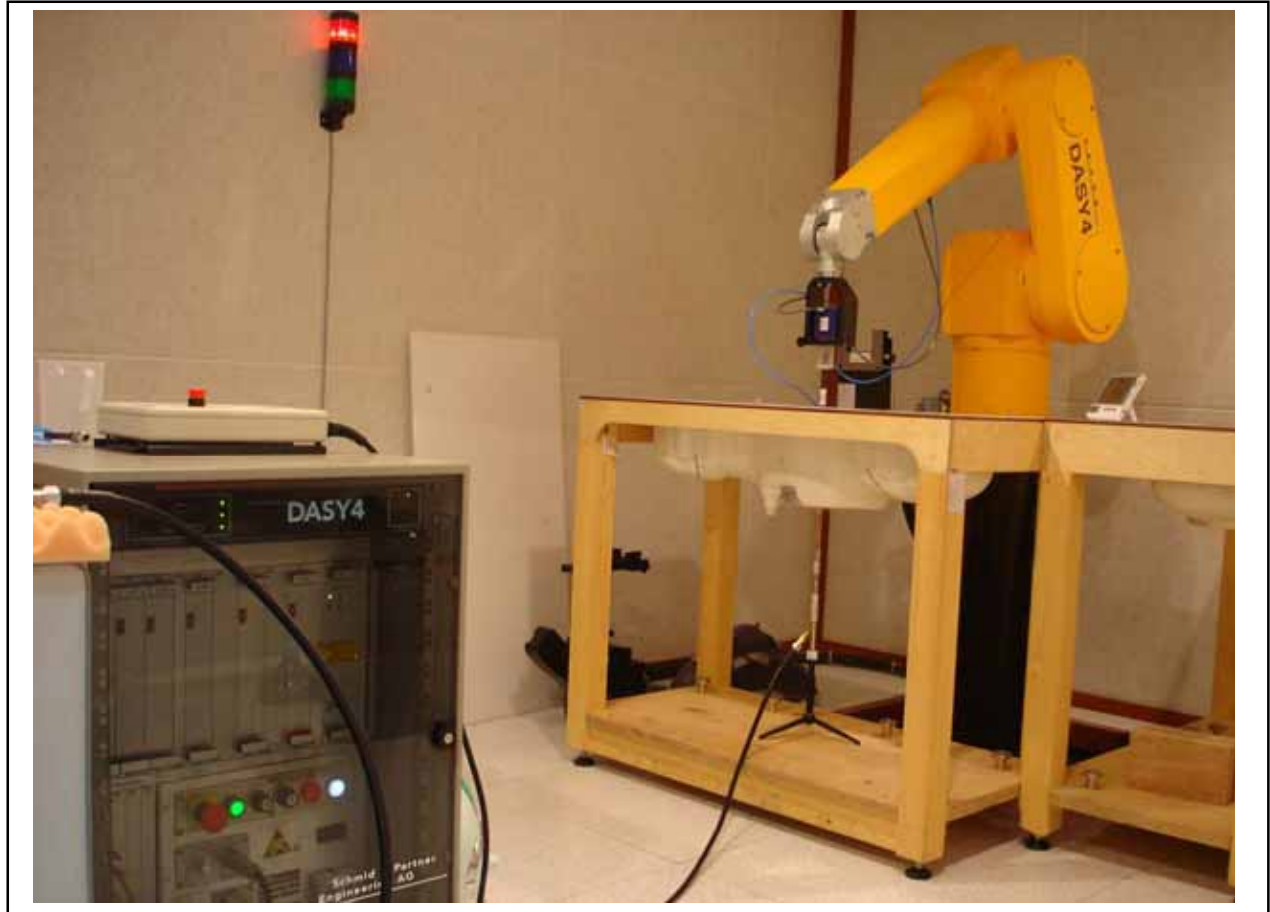

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- GSM850 Validation

Date/Time: 02/28/06 10:48:10

Test Laboratory: ESTECH

validation0228

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:xxx

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 48%

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 54.8 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 2.56 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.8 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 2.54 mW/g

Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.35 mW/g

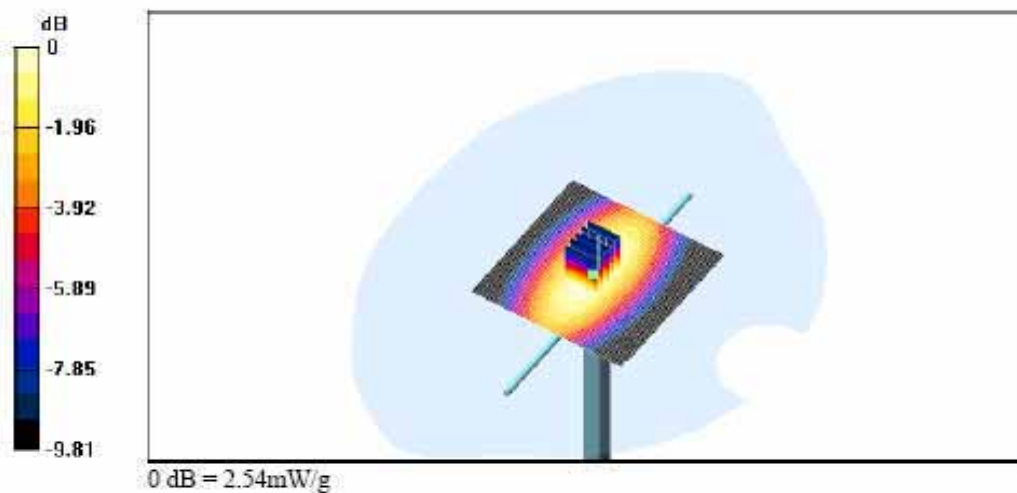



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- PCS1900 Validation

Date/Time: 03/02/06 10:07:33

Test Laboratory: ESTECH

validation0302

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:xxx

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 48%

Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Reference Value = 90.3 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 11.5 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 90.3 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 10.9 mW/g

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 9.66 mW/g

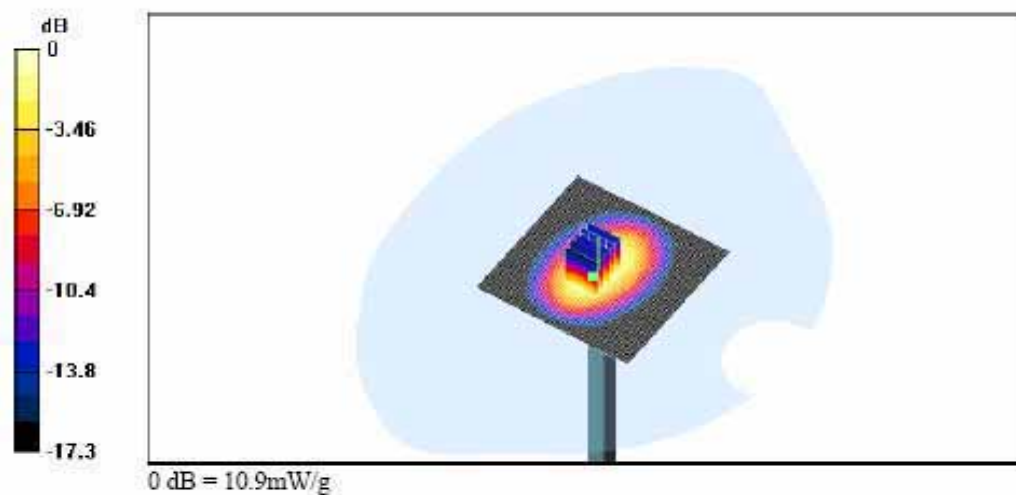



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

APPENDIX C : SAR Test Data

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- GSM850

Date/Time: 02/28/06 13:17:53

Test Laboratory: ESTECH

CH128 LEFT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 49%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 34.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 1.25 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.26 mW/g

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.19 mW/g

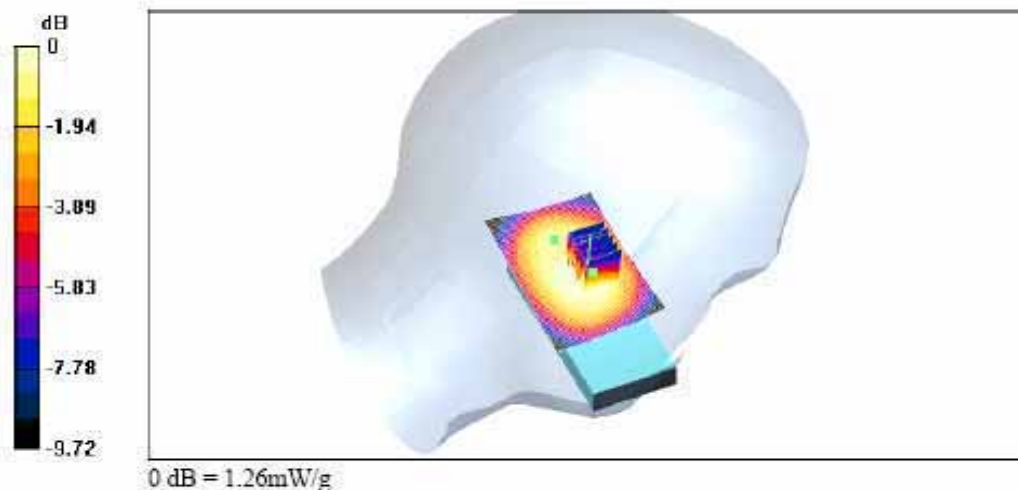

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 11:11:22

Test Laboratory: ESTECH

CH190 LEFT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX


Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$
kg/m³
Phantom section: Left Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 32.8 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 1.17 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 32.8 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 1.16 mW/g
Peak SAR (extrapolated) = 1.69 W/kg
SAR(1 g) = 1.11 mW/g

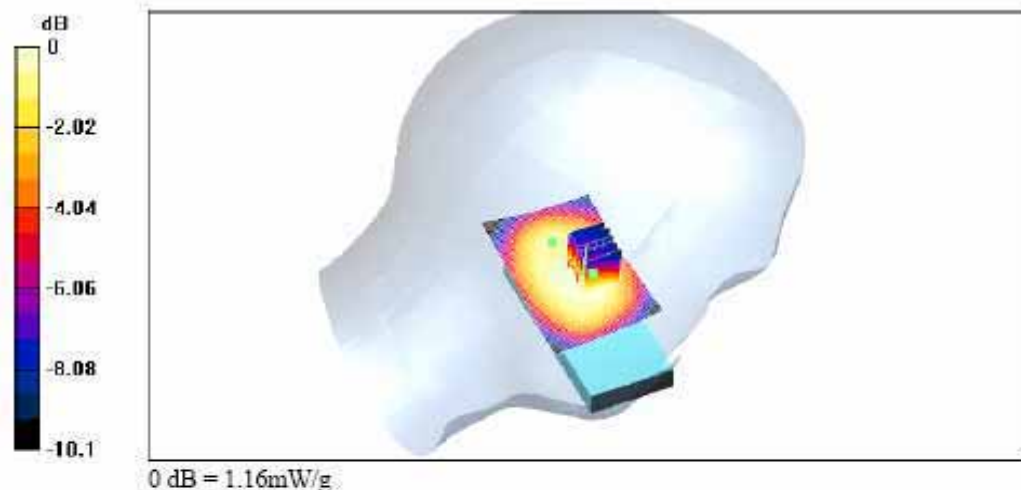



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 13:59:44

Test Laboratory: ESTECH

CH251 LEFT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 34.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.25 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.25 mW/g

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.17 mW/g

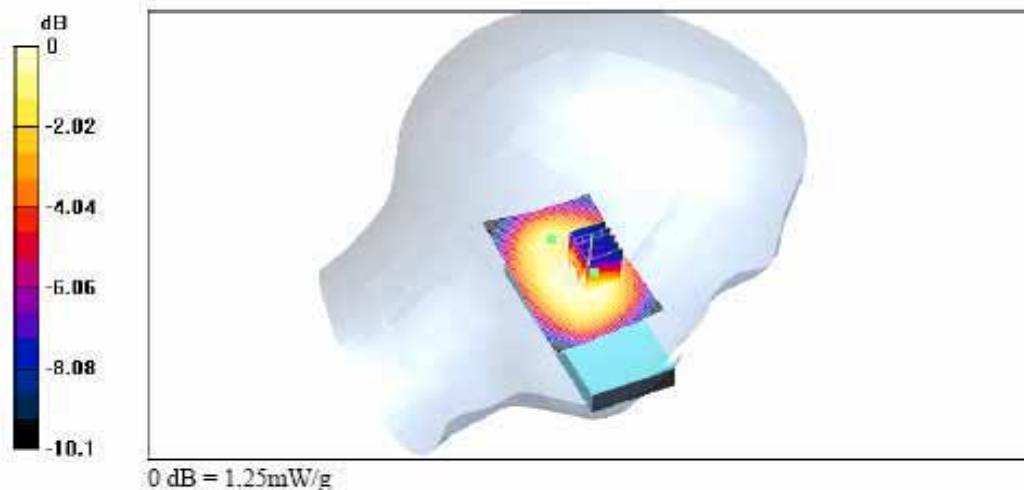

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 13:35:02

Test Laboratory: ESTECH

CHI28 RIGHT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$

kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 32.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.29 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.27 mW/g

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.18 mW/g

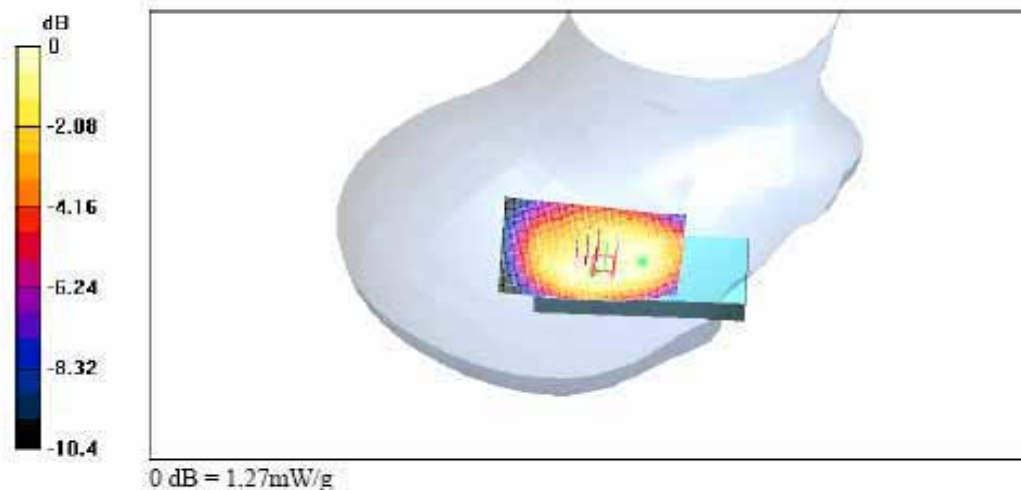

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 11:33:13

Test Laboratory: ESTECH

CH190 RIGHT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$

kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 30.1 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 1.17 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.1 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.13 mW/g

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 1.06 mW/g

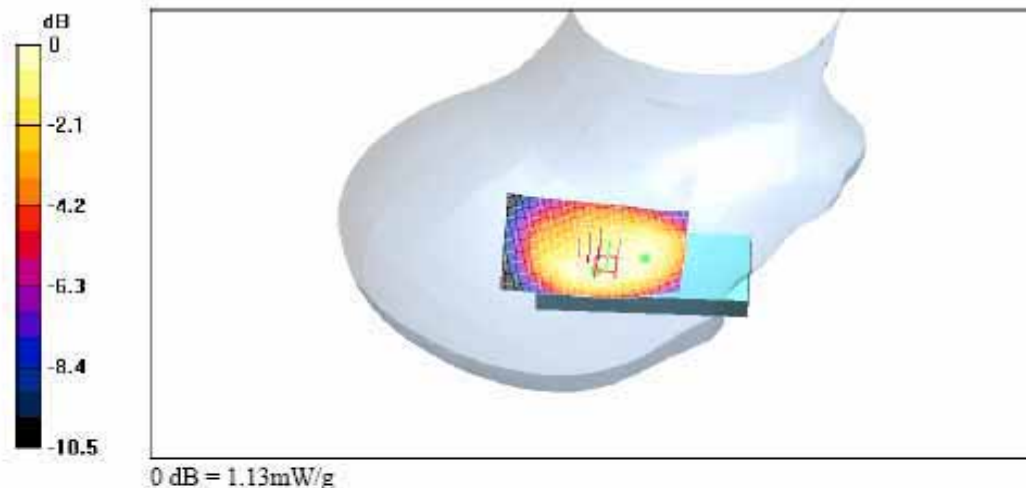

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 14:24:06

Test Laboratory: ESTECH

CH251 RIGHT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$

kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 31.4 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 1.26 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.4 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 1.23 mW/g

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 1.16 mW/g

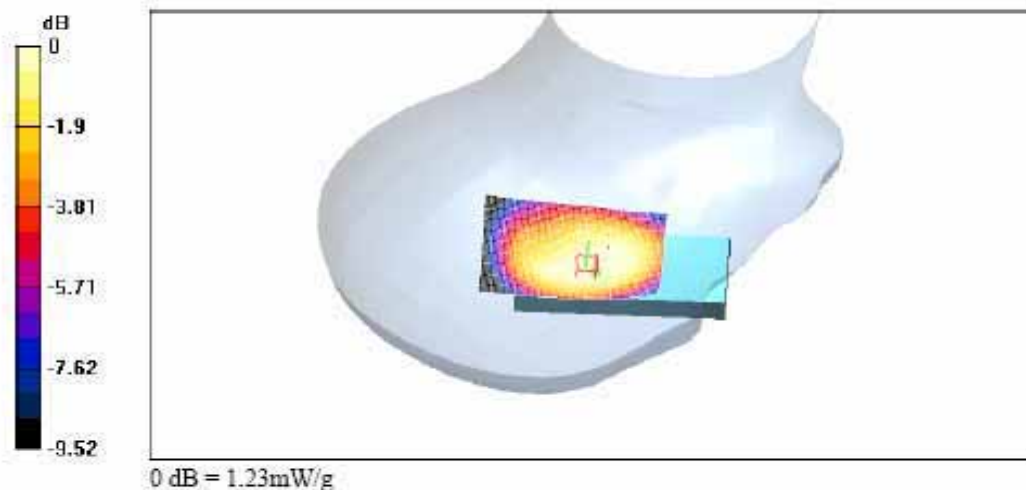



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 11:58:47

Test Laboratory: ESTECH

CH190 LEFT TILT

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 30.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.854 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.756 mW/g

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.705 mW/g

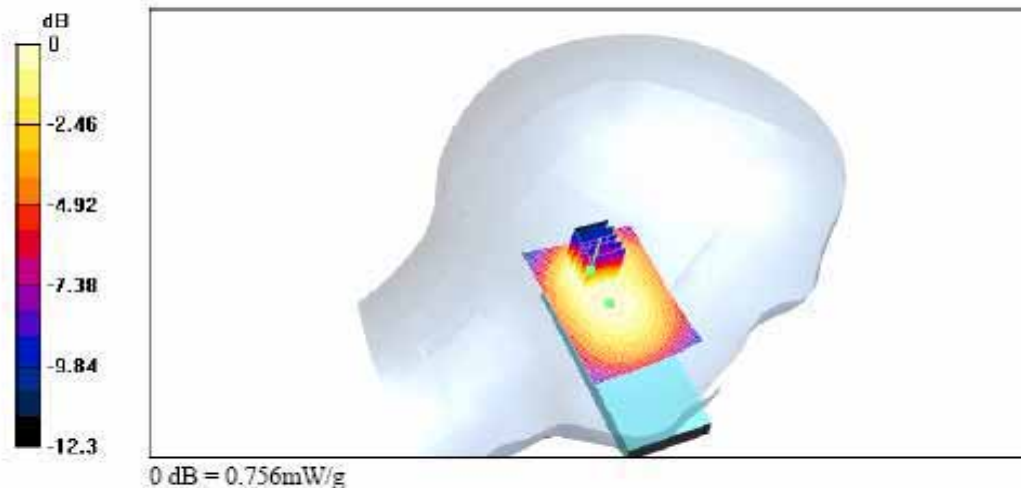

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 12:23:34

Test Laboratory: ESTECH

CH190 RIGHT TILT

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 28.2 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.768 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.2 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.727 mW/g

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.661 mW/g

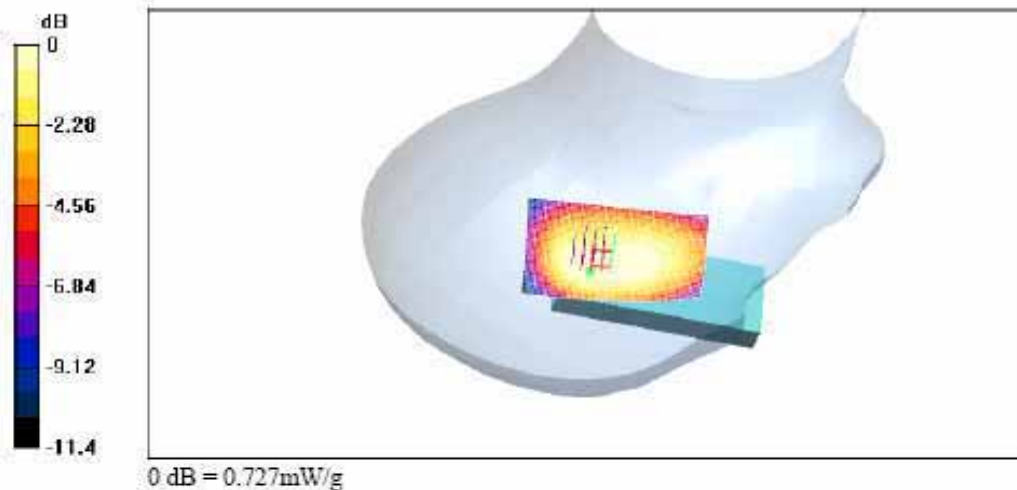

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 13:17:53

Test Laboratory: ESTECH

CH128 LEFT TOUCH-ZSCAN

DUT: MG185,MG185c,MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$


kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 49%

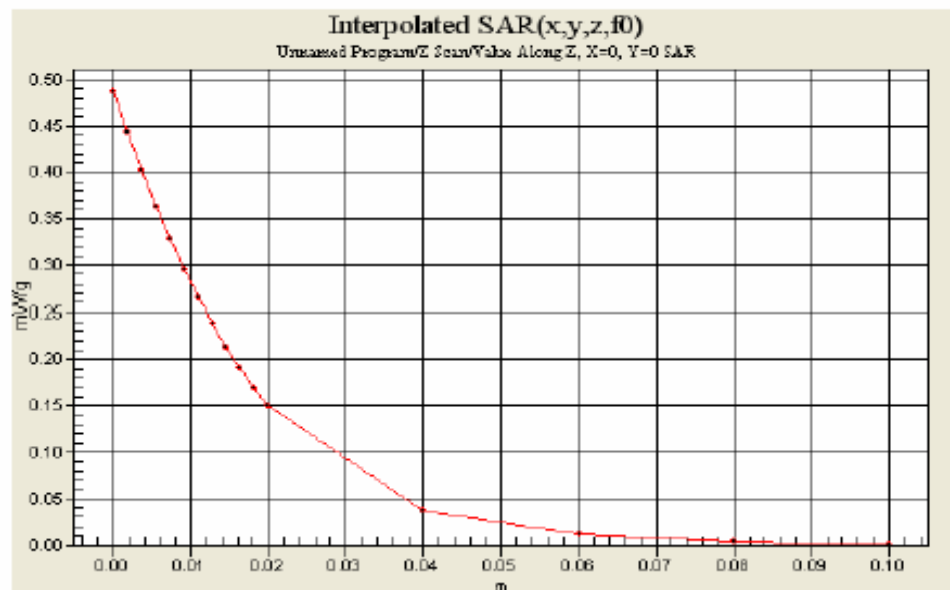



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 16:02:40

Test Laboratory: ESTECH

CH128 BODY

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX


Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$
kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 25.7 V/m; Power Drift = -0.0 dB
Maximum value of SAR (interpolated) = 1.29 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 25.7 V/m; Power Drift = -0.0 dB
Maximum value of SAR (measured) = 1.31 mW/g
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 1.23 mW/g

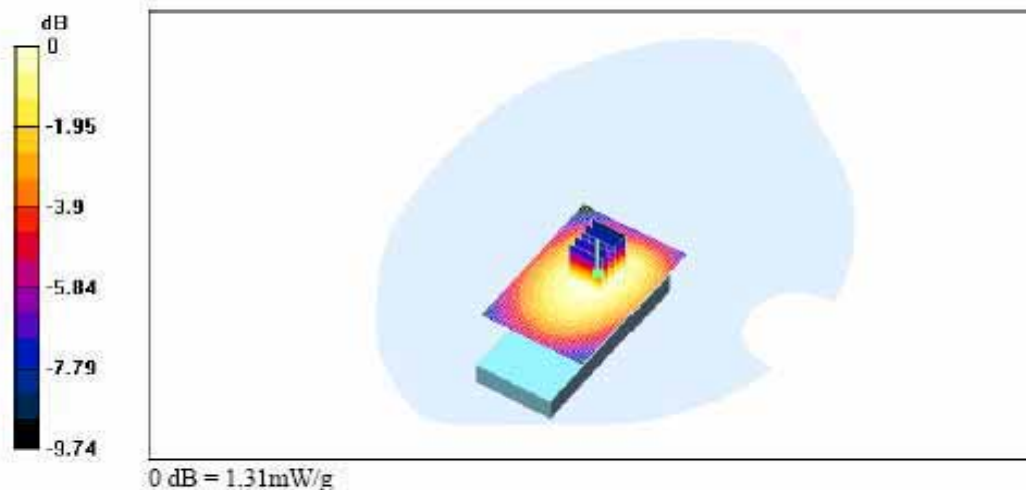

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 15:36:37

Test Laboratory: ESTECH

CH190 BODY

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.983$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 49%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 24.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.22 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.22 mW/g

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.15 mW/g

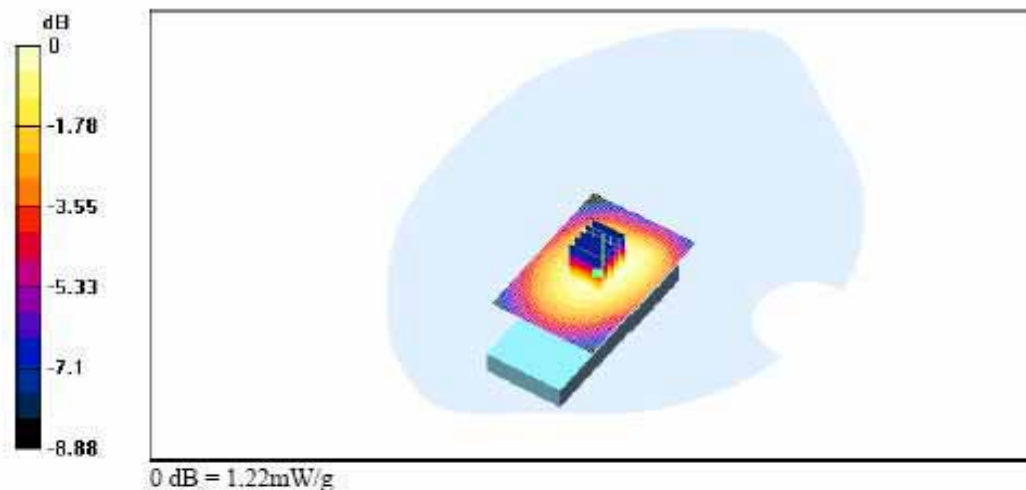



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 16:26:28

Test Laboratory: ESTECH

CH251 BODY

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 49%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 23.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.2 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.2 mW/g

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 1.13 mW/g

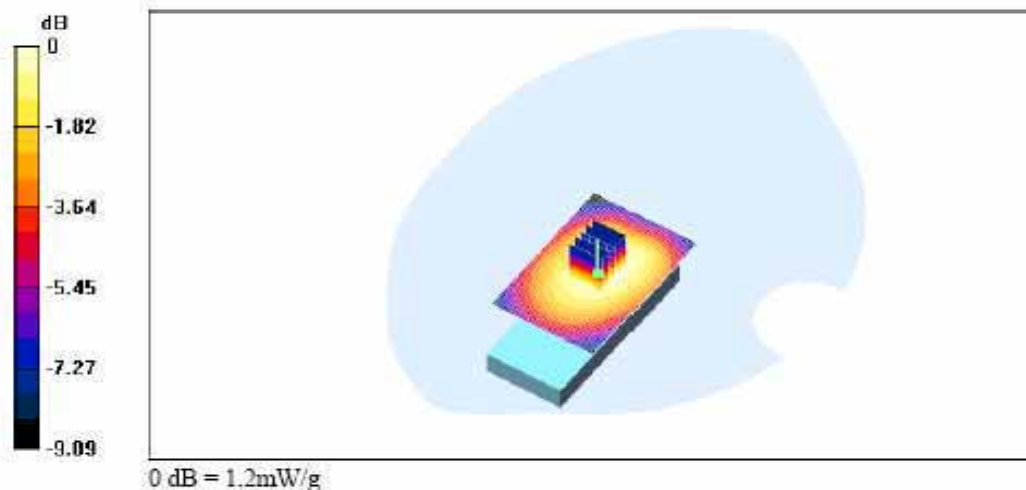

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 16:02:40

Test Laboratory: ESTECH

CH128 BODY-ZSCAN

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$


kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 47%

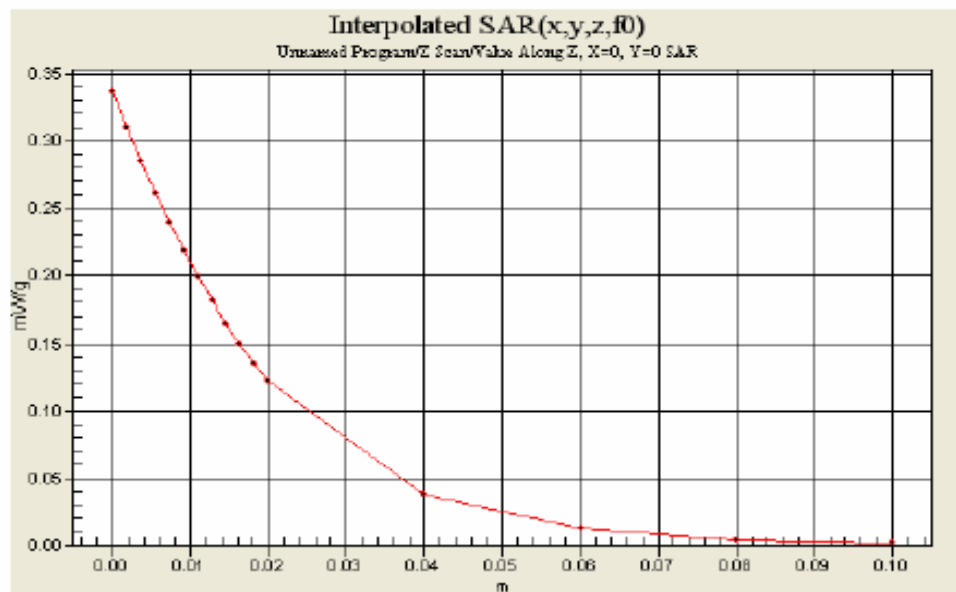

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/28/06 16:55:29

Test Laboratory: ESTECH

CH128 BODY-GPRS

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 49%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 21 V/m; Power Drift = -0.002 dB

Maximum value of SAR (interpolated) = 1.05 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21 V/m; Power Drift = -0.002 dB

Maximum value of SAR (measured) = 1.05 mW/g

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.983 mW/g

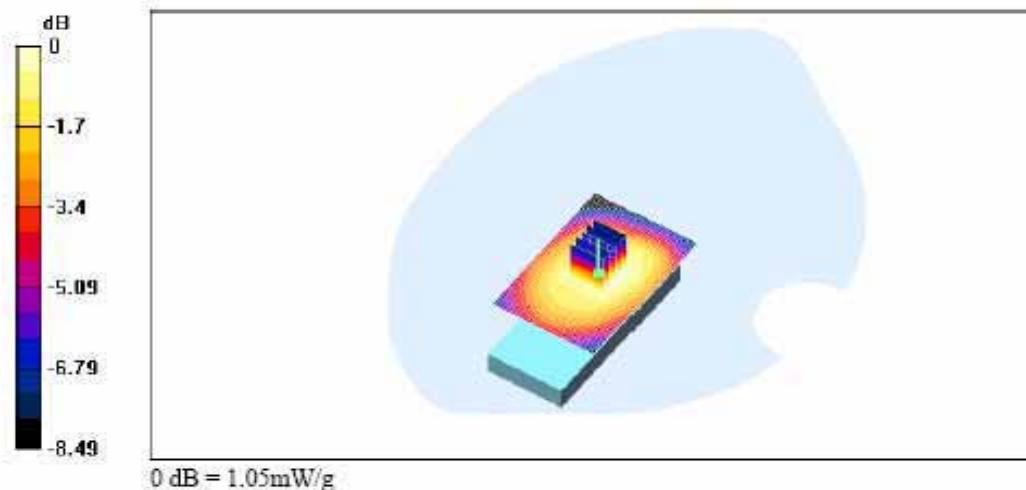

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

-PCS1900

Date/Time: 03/02/06 12:04:18

Test Laboratory: ESTECH

CH512 LEFT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.4 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.466 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.433 mW/g

Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.391 mW/g

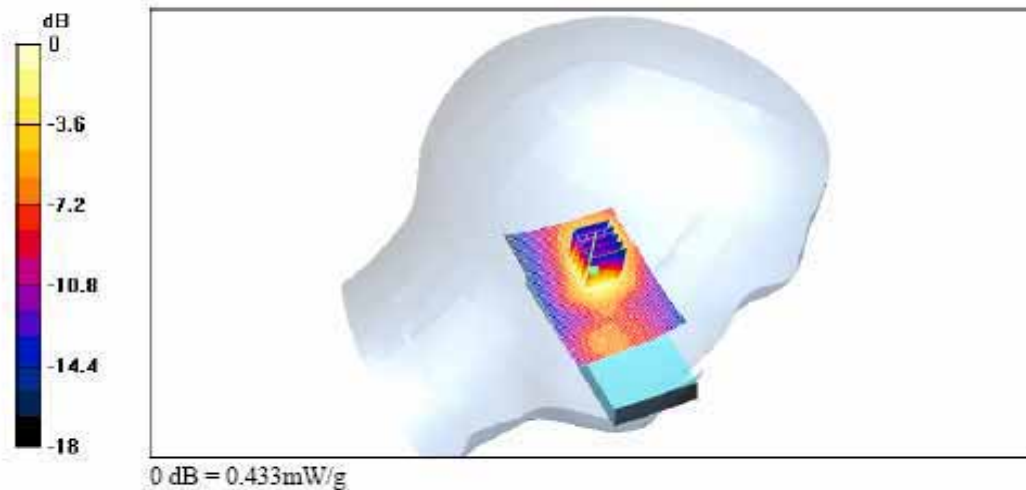

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 10:38:44

Test Laboratory: ESTECH

CH661 LEFT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 46%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.3 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.418 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.409 mW/g

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.364 mW/g

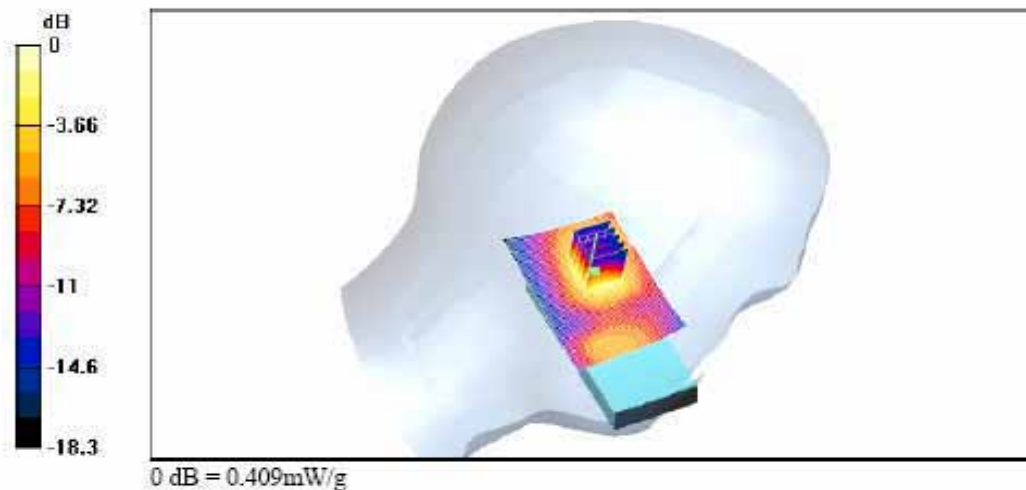



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 12:49:09

Test Laboratory: ESTECH

CH810 LEFT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX


Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$
kg/m³
Phantom section: Left Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 9.85 V/m; Power Drift = -0.0 dB
Maximum value of SAR (interpolated) = 0.276 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.85 V/m; Power Drift = -0.0 dB
Maximum value of SAR (measured) = 0.251 mW/g
Peak SAR (extrapolated) = 0.412 W/kg
SAR(1 g) = 0.228 mW/g

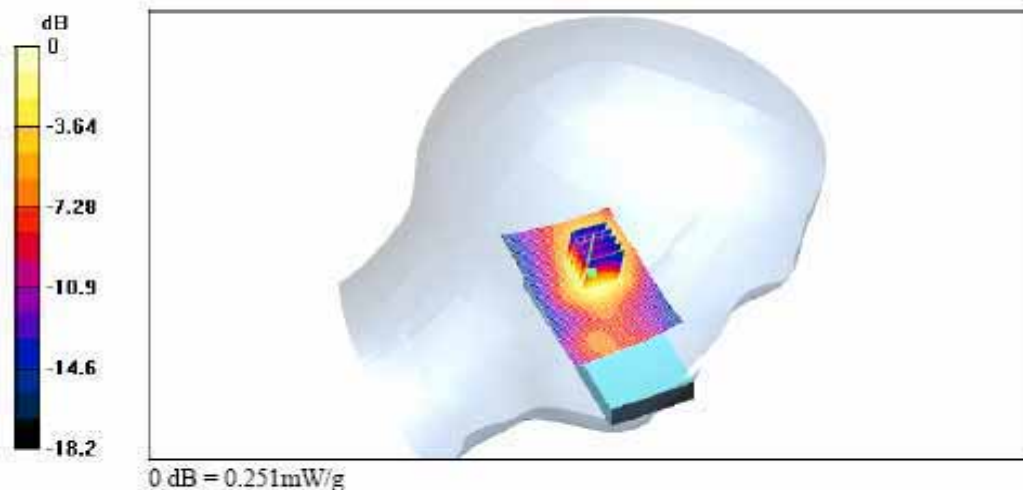



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 12:26:31

Test Laboratory: ESTECH

CH512 RIGHT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$
kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21°C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.7 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.421 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.424 mW/g

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.378 mW/g

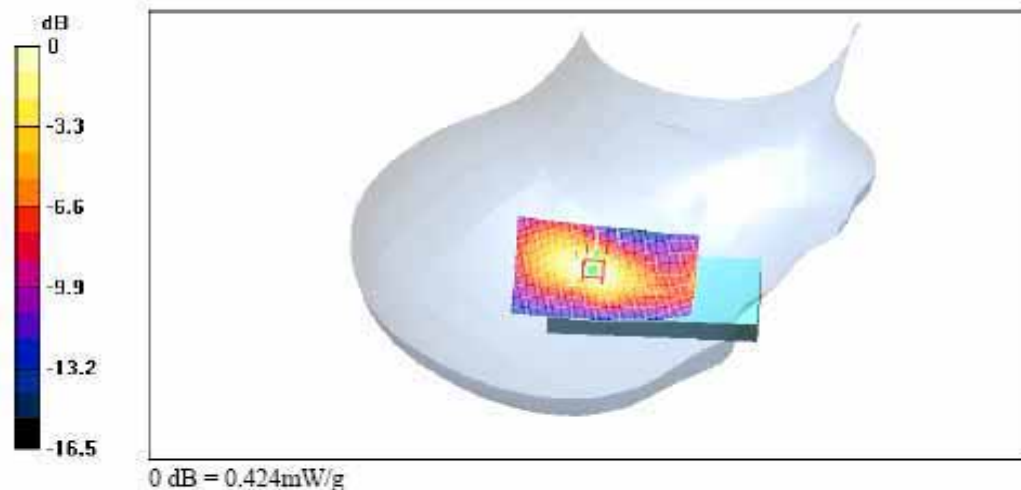

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 11:02:20

Test Laboratory: ESTECH

CH661 RIGHT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.340 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.343 mW/g

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.305 mW/g

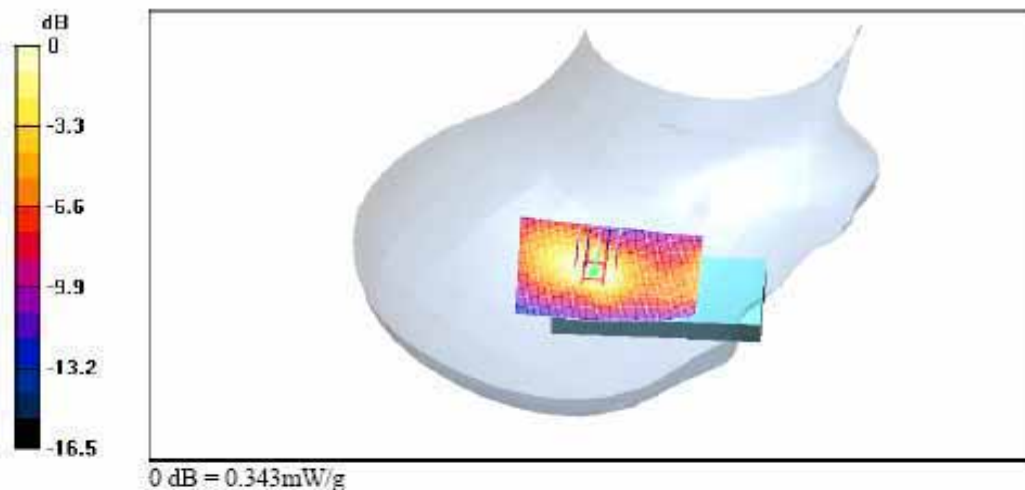

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 13:06:44

Test Laboratory: ESTECH

CH810 RIGHT TOUCH

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$

kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.92 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.222 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.92 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.223 mW/g

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.200 mW/g

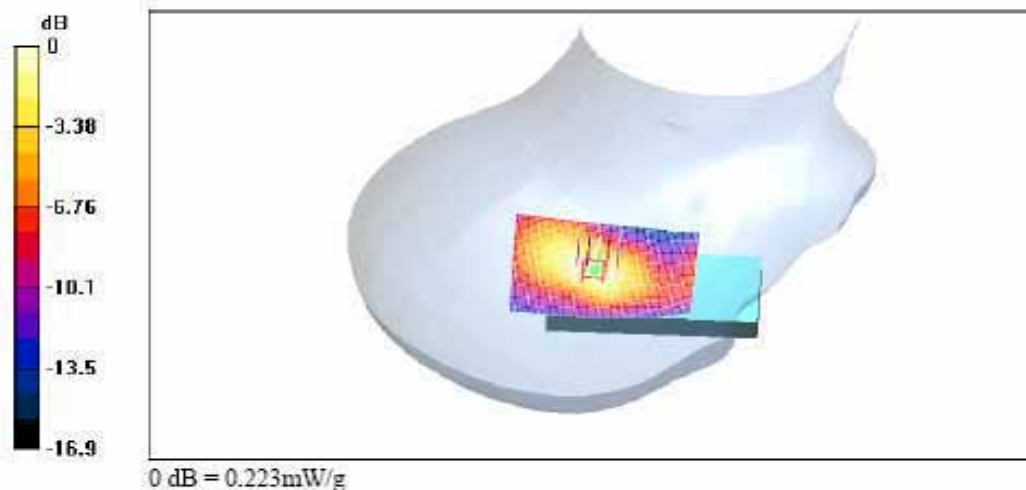

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 11:21:24

Test Laboratory: ESTECH

CH661 LEFT TILT

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.313 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.287 mW/g

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.264 mW/g

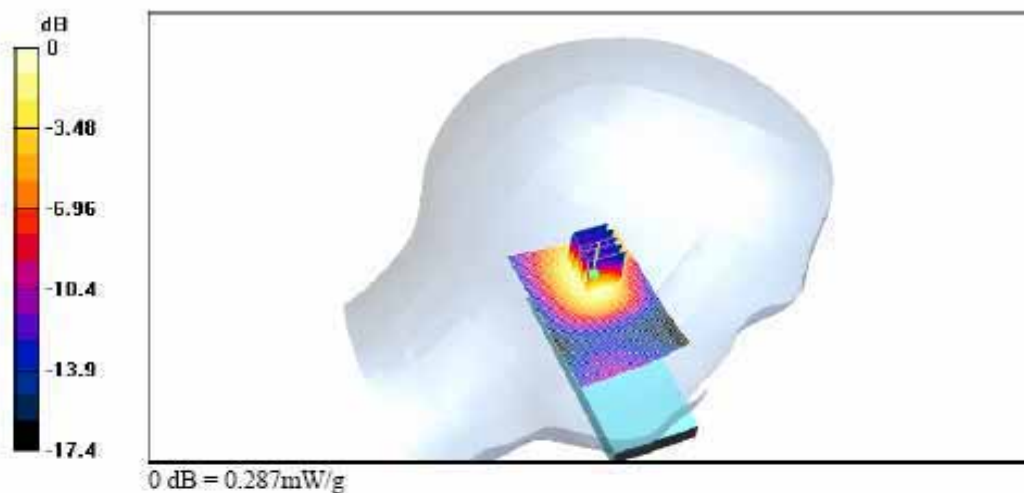

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 11:45:39

Test Laboratory: ESTECH

CH661 RIGHT TILT

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.6 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.270 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.252 mW/g

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.234 mW/g

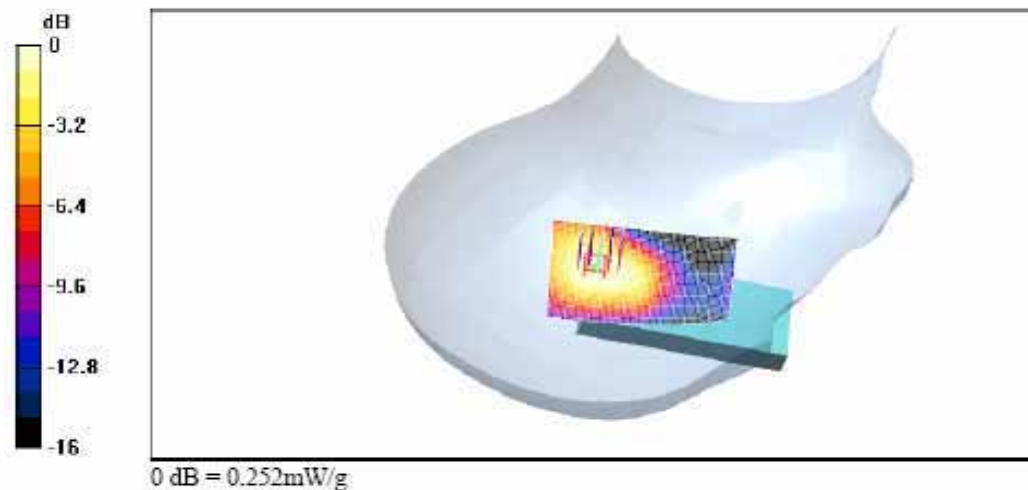

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 12:04:18

Test Laboratory: ESTECH

CH512 LEFT TOUCH-ZSCAN

DUT: MG185,MG185c,MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$


kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 47%

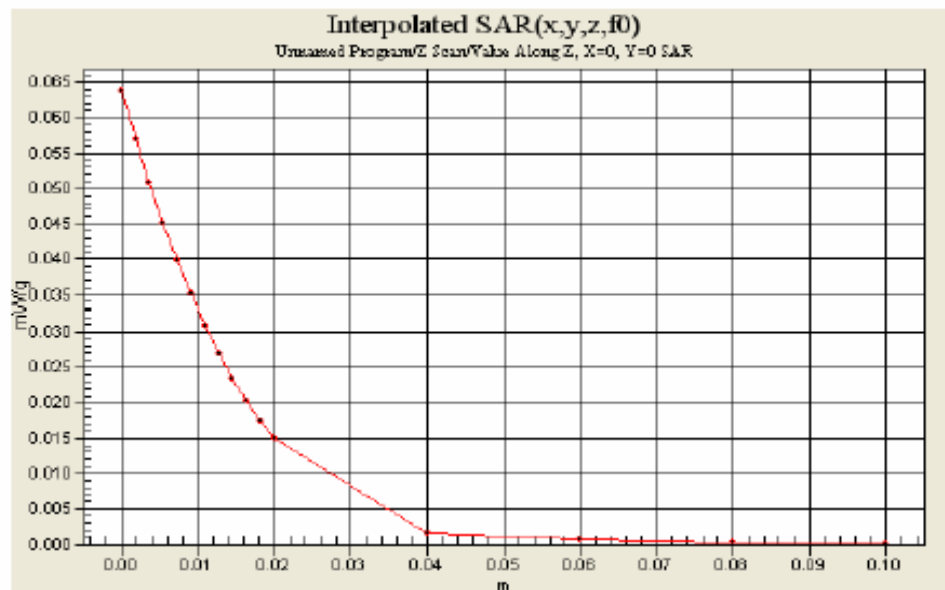



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 14:52:24

Test Laboratory: ESTECH

CH512 BODY

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX


Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$
kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(4.54, 4.54, 4.54); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 15.2 V/m; Power Drift = 0.1 dB
Maximum value of SAR (interpolated) = 0.413 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 15.2 V/m; Power Drift = 0.1 dB
Maximum value of SAR (measured) = 0.402 mW/g
Peak SAR (extrapolated) = 0.642 W/kg
SAR(1 g) = 0.366 mW/g

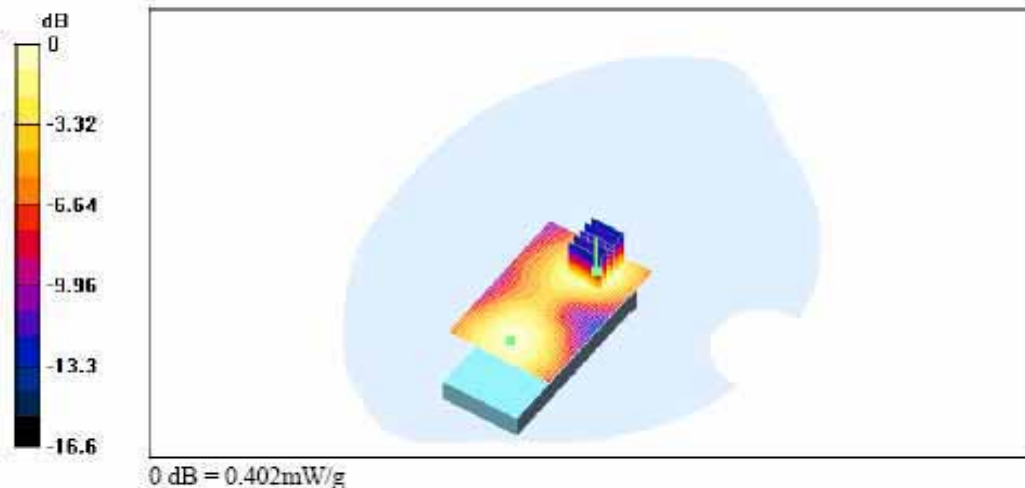

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 14:35:09

Test Laboratory: ESTECH

CH661 BODY

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(4.54, 4.54, 4.54); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 12.7 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.288 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.276 mW/g

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.252 mW/g

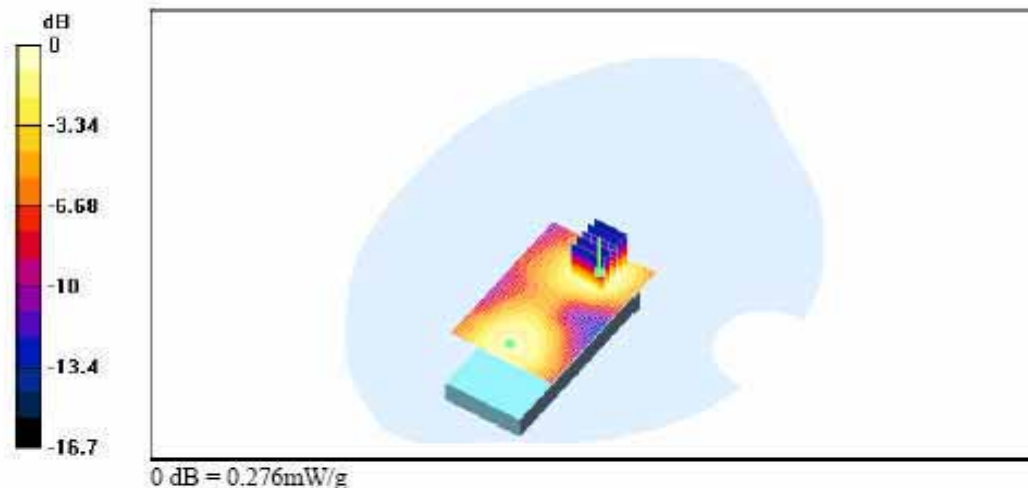

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 15:28:53

Test Laboratory: ESTECH

CH810 BODY

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX


Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$
kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(4.54, 4.54, 4.54); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 11 V/m; Power Drift = 0.0 dB
Maximum value of SAR (interpolated) = 0.222 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11 V/m; Power Drift = 0.0 dB
Maximum value of SAR (measured) = 0.212 mW/g
Peak SAR (extrapolated) = 0.347 W/kg
SAR(1 g) = 0.194 mW/g

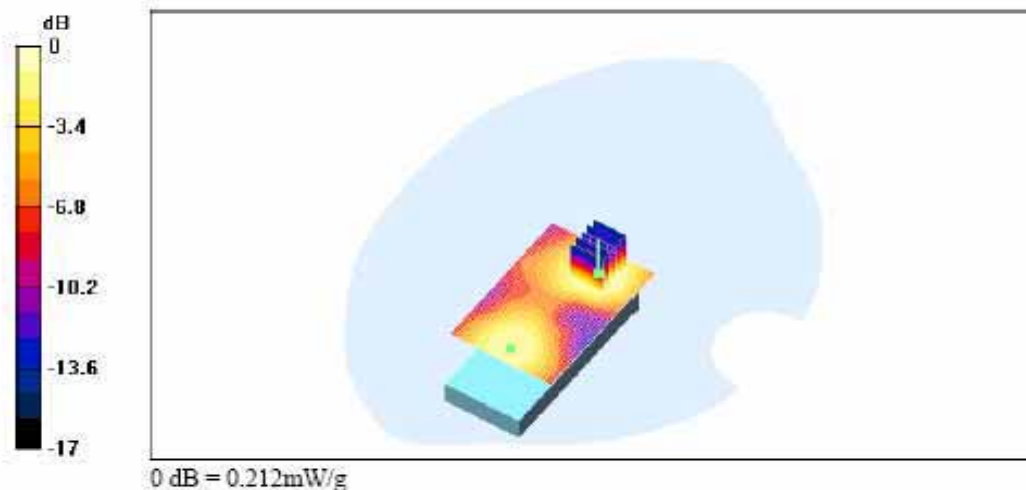

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 14:52:24

Test Laboratory: ESTECH

CH512 BODY-ZSCAN

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$


kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(4.54, 4.54, 4.54); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 48%

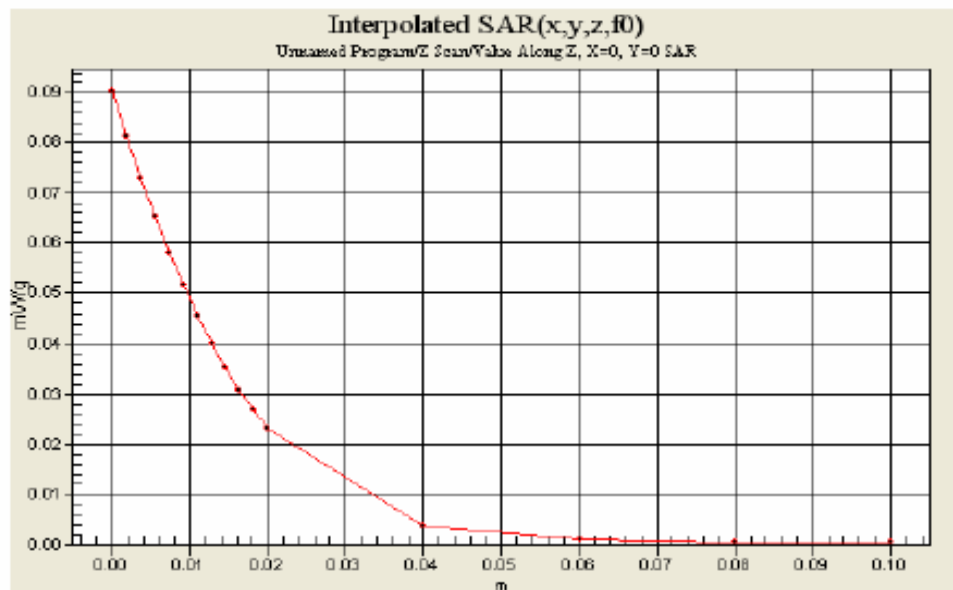

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 03/02/06 15:50:25

Test Laboratory: ESTECH

CH512 BODY-GPRS

DUT: MG185, MG185c, MG185d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.49$ niho/m; $\epsilon_r = 51.7$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(4.54, 4.54, 4.54); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 14.8 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.401 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.380 mW/g

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.343 mW/g

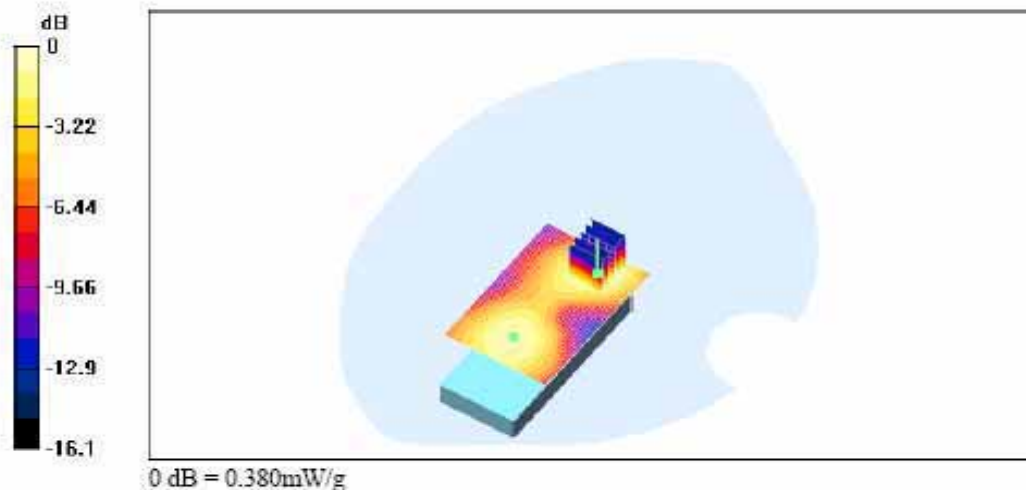



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

APPENDIX D : Calibration Certificates

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 40, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, <http://www.speag.com>

IMPORTANT NOTICE
DIPOLE TRANSPORTATION CASE

Important Note:

Please use only this suitcase for any future dipole transportation!

s p e a g

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, <http://www.speag.com>

Schmid & Partner Engineering AG

June 2003



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Estech (Dymstec)**

Certificate No: **D1900V2-5d058_Jan05**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d058**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **January 27, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1507	26-Oct-04 (SPEAG, No. ET3-1507_Oct04)	Oct-05
DAE4	SN 601	07-Jan-05 (SPEAG, No. DAE4-601_Jan05)	Jan-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05

	Name	Function	Signature
Calibrated by:	Judith Müller	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 31, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of

Schmid & Partner

Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.6 $\pm$ 6 %	1.45 mho/m $\pm$ 6 %
Head TSL temperature during test	(21.8 $\pm$ 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	9.81 mW / g
SAR normalized	normalized to 1W	39.2 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	38.3 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.12 mW / g
SAR normalized	normalized to 1W	20.5 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	20.0 mW / g $\pm$ 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.6 Ω + 3.9 j Ω
Return Loss	- 24.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.203 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 19, 2004

DASY4 Validation Report for Head TSL

Date/Time: 01/27/05 13:23:28

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d058

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 24.01.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.4 Build 13; Postprocessing SW: SEMCAD, V1.8 Build 133

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.2 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 9.81 mW/g; SAR(10 g) = 5.12 mW/g


Maximum value of SAR (measured) = 11.1 mW/g

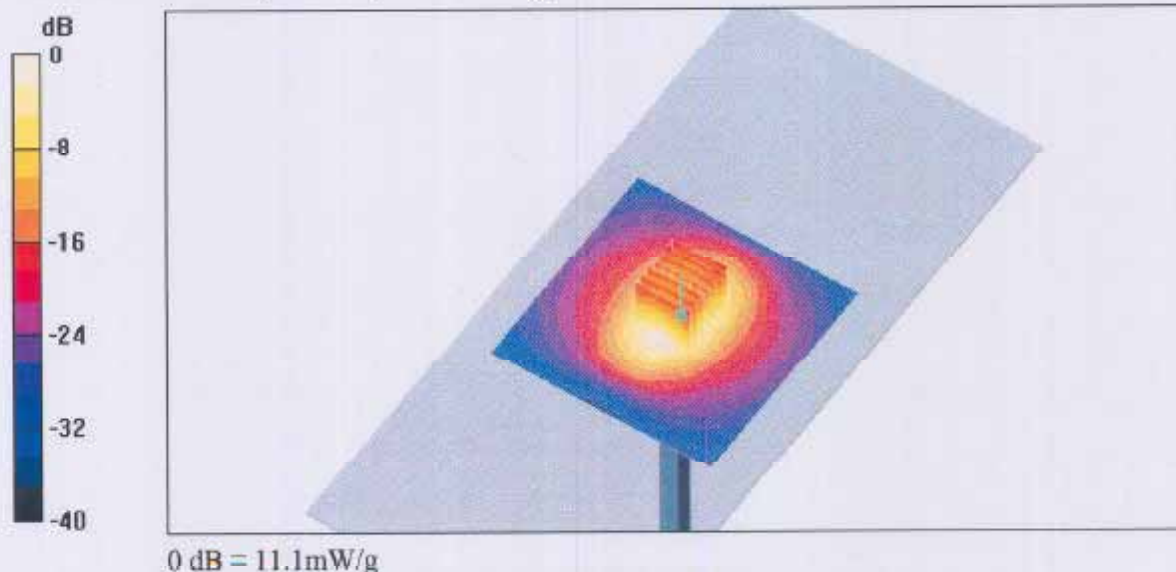


Impedance Measurement Plot for Head TSL

27 Jan 2005 11:02:39
CH1: S11 1: U FS 1: 54.572 Ω 3.9336 Ω 329.50 pF 1 900.000 000 MHz

*
De L
Cor

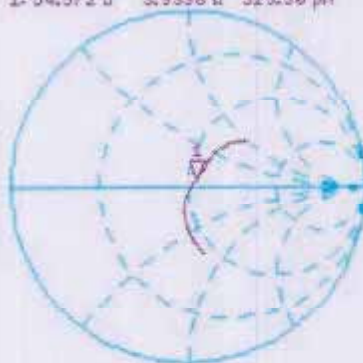

↑

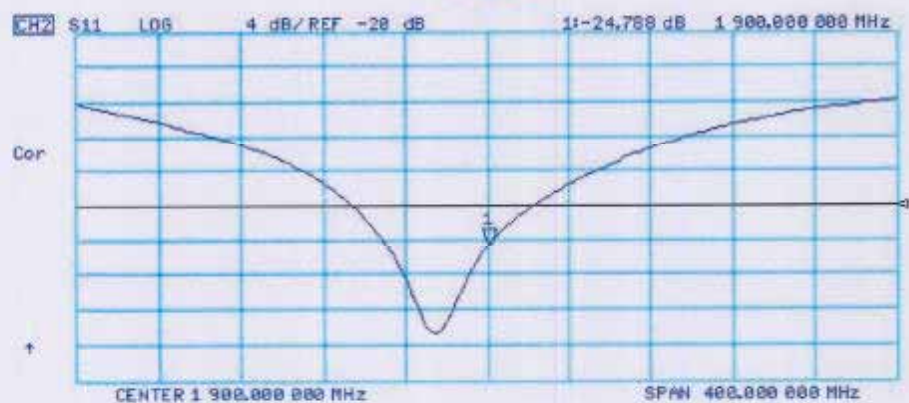



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Estech (Dymstec)**

Certificate No: **D835V2-475_Feb05**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 475**

Calibration procedure(s) **QA CAL-05.v6
Calibration procedure for dipole validation kits**

Calibration date: **February 24, 2005**

Condition of the calibrated item **In Tolerance**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1507	26-Oct-04 (SPEAG, No. ET3-1507_Oct04)	Oct-05
DAE4	SN 601	07-Jan-05 (SPEAG, No. DAE4-601_Jan05)	Jan-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05

Calibrated by:	Name Mika Mesli	Function Laboratory Technician	Signature 
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 25, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.