

On your side

**HCT**

고객비밀  
CUSTOMER SECRET



# TEST REPORT

EMI Test for FCC SDoC of MR24GA Model

**APPLICANT**

LG Electronics Inc.

**REPORT NO.**

HCT-EM-2306-FC006

**DATE OF ISSUE**

June 28, 2023

**Tested by**

Gyeong-Seon Kim

(signature)

**Technical Manager**

Jeong-Hyun Choi

(signature)

**Accredited by KOLAS, Republic of KOREA**

**HCT CO., LTD.**

*Bongjai Huh*

**BongJai Huh / CEO**

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 645 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401



# TEST REPORT

EMI Test for  
FCC SDoC

**REPORT NO.**

HCT-EM-2306-FC006

**DATE OF ISSUE**

June 28, 2023

**FCC ID.**

BEJMR24GA

**Applicant**

**LG Electronics Inc.**

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 17709,  
Republic of Korea

**Product Name**

Magic Remote

**Model Name**

MR24GA

**Date of Test**

June 20, 2023 to June 21, 2023

**Test Standard Used**

FCC CFR 47 PART 15 Subpart B Class B  
ANSI C63.4-2014

**Test Results**

Refer to the present document

**Manufacturer**

**LG Electronics Inc.**

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.



## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 28, 2023	Initial Release

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

If this report is required to confirmation of authenticity, please contact to [www.hct.co.kr](http://www.hct.co.kr)



## CONTENTS

1. GENERAL INFORMATION	5
1.1 Description of EUT	5
1.2 Tested System Details	5
1.3 Cable Description	6
1.4 Noise Suppression Parts on Cable (I/O Cable)	6
1.5 Test Facility	7
1.6 Calibration of Measuring Instrument	7
1.7 Measurement Uncertainty	7
2. DESCRIPTION OF TESTING	8
2.1 Measurement of Conducted Emission	8
2.2 Measurement of Radiated Emission	9
2.3 Configuration of Tested System	10
3. OPERATION OF THE EUT	11
4. MEASURING INSTRUMENTS	12
5. EMISSION TEST SUMMARY	13
5.1 Conducted Emission (Not Applicable)	13
5.2 Radiated Emission Below 1 GHz	14
5.3 Radiated Emission Above 1 GHz	16
6. APPENDIX A. TEST SETUP PHOTO	18



## 1. GENERAL INFORMATION

### 1.1 Description of EUT

<b>FCC ID.</b>	BEJMR24GA
<b>Product Name</b>	Magic Remote
<b>Model Name</b>	MR24GA
<b>Frequency Range</b>	2 402 MHz to 2 480 MHz (Bluetooth)
<b>Operating Voltage</b>	DC 3 V (Rated)
<b>Manufacturer</b>	LG Electronics Inc.

**NOTE.**

This product is a wireless remote controller, it does not have a port to connect peripherals and has a built-in battery.

### 1.2 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer
Magic Remote	MR24GA	-	LG Electronics Inc.
Bluetooth Dongle	-	-	LG Electronics Inc.
Notebook PC	HP ProBook 6560b	5CB2095MKD	HP
Notebook PC Adapter	Series PPP009L-E	-	Lite-ON Technology Co., Ltd.



### 1.3 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	N/A	N/A	N/A	N/A

"(D)" data cable and "(P)" power cable.

### 1.4 Noise Suppression Parts on Cable (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	N/A	N/A	N/A	N/A	N/A



### 1.5 Test Facility

Test site is located at 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014 and ANSI C63.4a-2017. Our laboratories are accredited and designated in accordance with the provisions of Radio Waves ACT and International Standard ISO/IEC 17025:2017. (National Radio Research Agency, CABID No. KR0032)

### 1.6 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017

### 1.7 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Test Site	Expanded Uncertainty
Radiated Emission (30 MHz to 1 GHz)	3 m Semi Anechoic Chamber #1	5.9 dB
Radiated Emission (1 GHz to 18 GHz)	3 m Semi Anechoic Chamber #1	4.8 dB



## 2. DESCRIPTION OF TESTING

### 2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).  
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).  
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

#### Conducted Emission Limits

Frequency (MHz)	Resolution Bandwidth (kHz)	Class A		Class B	
		Quasi-Peak (dBµV)	Average (dBµV)	Quasi-Peak (dBµV)	Average (dBµV)
0.15 to 0.5	9	79	66	66 to 56*	56 to 46*
0.5 to 5	9	73	60	56	46
5 to 30	9	73	60	60	50

NOTE. Decreases with the logarithm of the frequency.





## 2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.  
(1 GHz to 40 GHz)

### Radiated Emission Limits


Frequency (MHz)	Class A			Class B		
	Antenna Distance (m)	Field Strength ( $\mu\text{V/m}$ )	Quasi-Peak ( $\text{dB}\mu\text{V/m}$ )	Antenna Distance (m)	Field Strength ( $\mu\text{V/m}$ )	Quasi-Peak ( $\text{dB}\mu\text{V/m}$ )
30 to 88	10	90	39.0	3	100	40.0
88 to 216	10	150	43.5	3	150	43.5
216 to 960	10	210	46.4	3	200	46.0
Above 960	10	300	49.5	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Class A		Class B		
		Peak ( $\text{dB}\mu\text{V/m}$ )	Average ( $\text{dB}\mu\text{V/m}$ )	Peak ( $\text{dB}\mu\text{V/m}$ )	Average ( $\text{dB}\mu\text{V/m}$ )	
Above 1 000	3	80	60	74	54	

### 2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

### 2.3 Configuration of Tested System

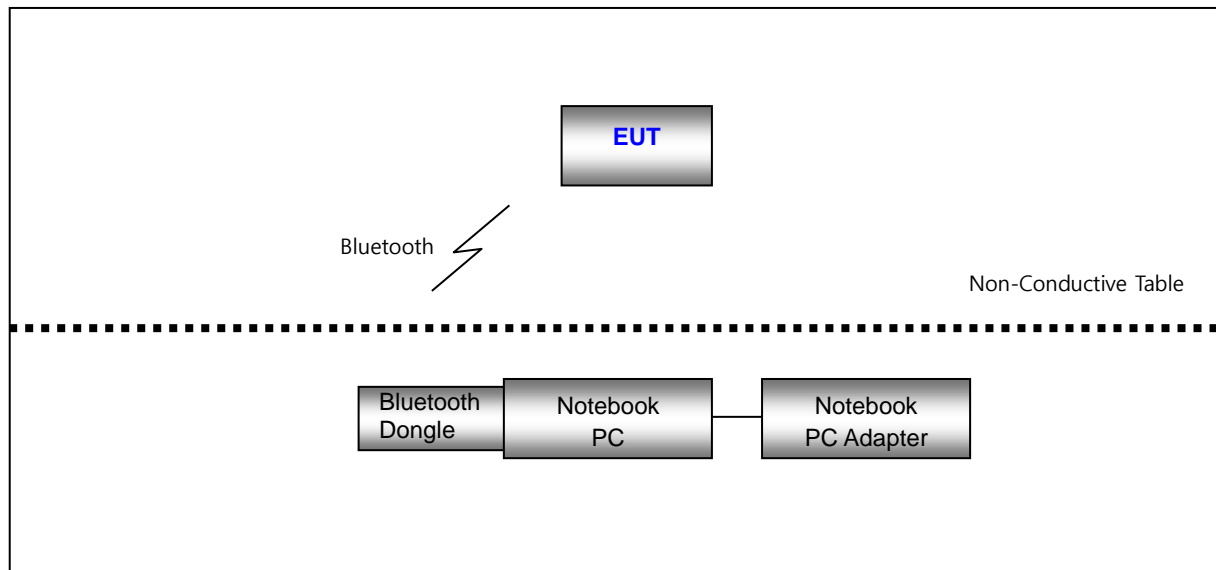

### 3. OPERATION OF THE EUT

During preliminary test and final tests, the following operating mode was investigated.

It was tested the following operating mode, after connecting all peripheral devices.;

**Operating Modes:** Bluetooth+Voice Operating Mode

The EUT and Bluetooth dongle are continuously communicating and the EUT is recording with a microphone running.



#### 4. MEASURING INSTRUMENTS

Type	Model Name	Manufacturer	Serial Number	Calibration Cycle	Next Calibration Date	
<b>Conducted emission</b>						
<input type="checkbox"/>	EMI Test Receiver	ESR7	Rohde & Schwarz	101910	1 year	05.26.2024
<input type="checkbox"/>	LISN	ENV216	Rohde & Schwarz	102245	1 year	08.22.2023
<input type="checkbox"/>	Software	EMC32	Rohde & Schwarz	-	-	-
<b>Radiated emission below 1 GHz</b>						
<input checked="" type="checkbox"/>	EMI Test Receiver	ESU40	Rohde & Schwarz	100524	1 year	05.09.2024
<input checked="" type="checkbox"/>	Bilog Antenna	VULB9168	Schwarzbeck	255	2 year	03.10.2025
<input checked="" type="checkbox"/>	Antenna master	MA4640-XP-ET	INNCO SYSTEM	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	CO3000	INNCO SYSTEM	CO3000/870/35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn Table	1060	INNCO SYSTEM	-	N/A	-
<input checked="" type="checkbox"/>	Turn Table controller	CO2000	INNCO SYSTEM	CO2000/095/7590304/L	N/A	-
<input checked="" type="checkbox"/>	Software	EMC32	Rohde & Schwarz	-	-	-
<b>Radiated emission above 1 GHz</b>						
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.09.2024
<input checked="" type="checkbox"/>	Horn Antenna	BBHA 9120D	Schwarzbeck	01836	1 year	07.21.2023
<input checked="" type="checkbox"/>	Power Amplifier	TK-PA18H	TESTEK	170034-L	1 year	11.04.2023
<input type="checkbox"/>	Horn Antenna	BBHA 9170	Schwarzbeck	BBHA 9170 #786	1 year	11.17.2023
<input type="checkbox"/>	Power Amplifier	TK-PA1840H	TESTEK	170030-L	1 year	02.22.2024
<input checked="" type="checkbox"/>	Antenna master	MA4640-XP-ET	INNCO SYSTEM	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	CO3000	INNCO SYSTEM	CO3000/870/35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn Table	1060	INNCO SYSTEM	-	N/A	-
<input checked="" type="checkbox"/>	Turn Table controller	CO2000	INNCO SYSTEM	CO2000/095/7590304/L	N/A	-
<input checked="" type="checkbox"/>	Software	EMC32	Rohde & Schwarz	-	-	-



## 5. EMISSION TEST SUMMARY

### 5.1 Conducted Emission (Not Applicable)

#### 5.1.1 Operating Condition

The test results of conducted emission at mains ports provide the following information:

<b>Test Standard Used</b>	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
<b>Frequency Range</b>	150 kHz to 30 MHz
<b>Detector</b>	Quasi-Peak, CISPR-Average
<b>Bandwidth</b>	9 kHz (6 dB)
<b>Operating Mode</b>	Not applicable
<b>Test Site</b>	EMI Shielded Room
<b>Temperature</b>	min. - °C / max. - °C
<b>Relative Humidity</b>	min. - % / max. - %
<b>Test Date</b>	-

- Calculation Formula:**
1. Conductor L1 = Hot, Conductor N = Neutral
  2. Corr. = LISN Factor + Cable Loss
  3. QuasiPeak or CAverage= Receiver Reading + Corr.
  4. Margin = Limit – QuasiPeak or CAverage

#### 5.1.2 Measuring Data

Not applicable



## 5.2 Radiated Emission Below 1 GHz

### 5.2.1 Operating Condition

The test results of radiated emission provide the following information:

Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
Frequency Range	30 MHz to 1 000 MHz
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Measurement Distance	3 m
Antenna Height	1 m to 4 m
Test Site	3 m Semi Anechoic Chamber #1
Temperature	min. 23.6 °C, max. 25.7 °C
Relative Humidity	min. 46.7 %, max. 51.9 %
Test Date	June 20, 2023

- Calculation Formula:**
1. POL. H = Horizontal, POL. V = Vertical
  2. QuasiPeak = Reading (Receiver Reading) + Corr.
  3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
  4. Margin = Limit - QuasiPeak



5.2.2 Measuring Data

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization (H/V)	Azimuth (deg)	Corr. (dB)
32.5865	16.54	40.00	23.46	325.2	V	7.0	18.7
54.7446	18.76	40.00	21.24	325.1	V	42.0	19.9
69.0600	16.08	40.00	23.92	325.1	V	0.0	18.3
320.0563	30.46	46.00	15.54	100.0	H	311.0	20.9
688.8690	28.59	46.00	17.41	174.9	V	32.0	28.7
926.6143	31.89	46.00	14.11	109.9	V	79.0	31.9

### 5.3 Radiated Emission Above 1 GHz

#### 5.3.1 Operating Condition

The test results of radiated emission provide the following information:

Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
Detector	Peak, CISPR-Average
Bandwidth	1 MHz
Highest Frequency	2480 MHz
Tested Frequency Range	1 GHz to 18 GHz
Measurement Distance	3 m
Antenna Height	1 m to 4 m
Test Site	3 m Semi Anechoic Chamber #1
Temperature	min. 23.1 °C, max. 25.5 °C
Relative Humidity	min. 41.1 %, max. 52.2 %
Test Date	June 21, 2023

- Calculation Formula:**
1. POL. H = Horizontal, POL. V = Vertical
  2. Peak or CAverage = Reading (Receiver Reading) + Corr.
  3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss – Amplifier Gain
  4. Margin = Limit - Peak or CAverage





5.3.2 Measuring Data

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	CAverage (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol (H/V)	Azimuth (deg)	Corr. (dB)
1308.7550	---	17.02	54.00	36.98	242.6	V	99.0	-30.4
1349.5000	31.80	---	74.00	42.20	249.8	V	181.0	-30.3
2317.8250	---	19.16	54.00	34.84	156.6	H	2.0	-26.9
2320.1750	38.50	---	74.00	35.50	249.9	H	7.0	-26.9
3903.9650	34.41	---	74.00	39.59	140.8	V	322.0	-21.6
3924.7500	---	22.17	54.00	31.83	249.8	H	340.0	-21.6
6657.5200	---	27.13	54.00	26.87	129.7	V	21.0	-13.0
6681.0250	39.12	---	74.00	34.88	125.7	V	346.0	-12.9
8857.4750	---	29.70	54.00	24.30	214.6	V	10.0	-9.4
8909.8100	41.87	---	74.00	32.13	142.7	V	101.0	-9.3
11279.5800	---	32.16	54.00	21.84	226.6	V	346.0	-3.8
11442.5550	44.89	---	74.00	29.11	100.0	H	0.0	-3.7



## 6. APPENDIX A. TEST SETUP PHOTO

Please refer to Appendix. A and test setup photo file no. as follows;

File No.	Date of Issue	Description
HCT-EM-2306-FC006-P	June 28, 2023	Initial Release

End of report