



TEST REPORT

FCC/ISED DTS Test for MTVWBE01GLX
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2103-FI007

DATE OF ISSUE
March 15, 2021

Tested by
Jin Gwan Lee



Technical Manager
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.

Soo Chan Lee
SooChan Lee / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC/ISED DTS Test
for MTVWBE01GLX

REPORT NO.
HCT-RF-2103-FI007

DATE OF ISSUE
March 15, 2021

Additional Model
-

Applicant **LG Electronics Inc.**
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Eut Type RF Module
Model Name MTVWBE01GLX

FCC ID BEJMTVWBE01GLX
IC 2703H-MTVWBE01GLX

Modulation type CCK/DSSS/OFDM

FCC Classification Digital Transmission System(DTS)

FCC Rule Part(s) Part 15.247

IC Rule Part(s) RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	March 15, 2021	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 AND KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION	8
4. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
5. ANTENNA REQUIREMENTS	9
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	30
9. TEST RESULT	32
9.1 DUTY CYCLE	32
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	33
9.3 OUTPUT POWER	46
9.4 POWER SPECTRAL DENSITY	50
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	57
9.6 RADIATED SPURIOUS EMISSIONS	86
9.7 RADIATED RESTRICTED BAND EDGES	94
9.8 RECEIVER SPURIOUS EMISSIONS	99
9.9 POWERLINE CONDUCTED EMISSIONS	100
10. LIST OF TEST EQUIPMENT	104
11. ANNEX A_ TEST SETUP PHOTO	106

1. EUT DESCRIPTION

Model	MTVWBE01GLX		
Additional Model	-		
EUT Type	RF Module		
Power Supply	DC 3.30 V		
Frequency Range	2412 MHz - 2472 MHz		
Max. RF Output Power	Peak Power	Ant. 1 (SISO)	802.11b: 21.08 dBm 802.11g: 22.85 dBm 802.11n(HT20): 21.39 dBm 802.11n(HT40): 18.98 dBm
		Ant. 2 (SISO)	802.11b: 20.44 dBm 802.11g: 22.08 dBm 802.11n(HT20): 21.16 dBm 802.11n(HT40): 18.62 dBm
		Ant. 1 + Ant. 2 (MIMO)	802.11b: 23.78 dBm 802.11g: 25.49 dBm 802.11n(HT20): 24.29 dBm 802.11n(HT40): 21.81 dBm
	Average Power	Ant. 1 (SISO)	802.11b: 14.85 dBm 802.11g: 14.08 dBm 802.11n(HT20): 12.62 dBm 802.11n(HT40): 10.07 dBm
		Ant. 2 (SISO)	802.11b: 14.25 dBm 802.11g: 13.50 dBm 802.11n(HT20): 12.34 dBm 802.11n(HT40): 9.81 dBm
		Ant. 1 + Ant. 2 (MIMO)	802.11b: 17.45 dBm 802.11g: 16.73 dBm 802.11n(HT20): 15.49 dBm 802.11n(HT40): 12.95 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	13 Channels		
Antenna type	PIFA (Planar Inverted F Antenna)		
Antenna Peak Gain	Ant1: -0.73 dBi / Ant2: -0.04 dBi		
Date(s) of Tests	February 19, 2021 ~ March 15, 2021		
PMN (Product Marketing Number)	RF Module		
HVIN (Hardware Version Identification Number)	MTVWBE01GLX		
FVIN (Firmware Version Identification Number)	ver 1.0		
HMN (Host Marketing Name)	N/A		
EUT serial numbers	Radiated : MTVWBE01GLX-1 Conducted : MTVWBE01GLX-2		
Manufacturer	Markone-Technology A 2401, 606, Seobusaet-gil, Geumcheon-gu, Seoul, Korea, 08504		

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11b	O	O	X	O
802.11g	O	O	X	O
802.11n(HT20)	O	O	O	O
802.11n(HT40)	O	O	O	O

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

2. Directional Gain Calculation

- If any transmit signals are correlated with each other(802.11b/g/n_HT20),

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N] \text{ dBi}$$

▣ **Antenna Gain**

2.4 GHz Band

Antenna Gain	802.11b/g/n	Ant 0	-0.73 dBi
		Ant 1	-0.04 dBi
Directional Antenna Gain	802.11b/g/n	Ant 0 & 1	2.63 dBi

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of A NSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

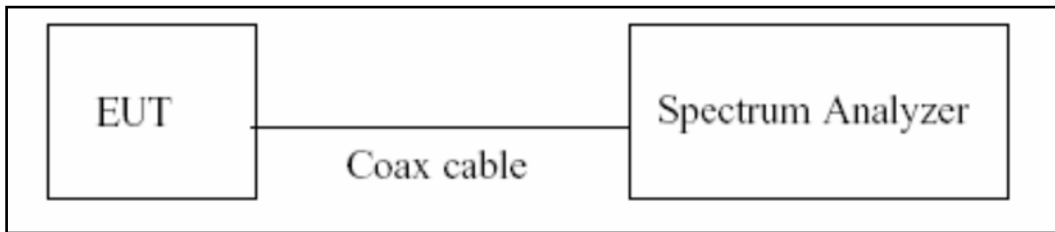

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth & 99 % Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW $\cong 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10.2 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
 - 2) Span = 1.5 times the DTS channel bandwidth.
 - 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
 - 4) $VBW \geq 3 \times RBW$.
 - 5) Sweep = auto couple
 - 6) Detector = peak
 - 7) Trace Mode = max hold
 - 8) Allow trace to fully stabilize.
 - 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.05
100	20.09
200	20.14
300	20.18
400	20.24
500	-0.46
600	20.24
700	20.27
800	20.28
900	20.29
1000	20.34
2000	20.49
2400	20.55
2412	20.55
2437	20.55
2462	20.55
2500	20.53
3000	20.65
4000	20.71
5000	20.80
5700	20.87
5800	20.87
6000	21.08
7000	21.20
8000	21.19
9000	21.28
10000	21.38
11000	21.47
12000	21.56
13000	21.57
14000	21.61
15000	21.70
16000	21.79
17000	21.98
18000	22.12
19000	22.04
20000	21.71
21000	21.84
22000	21.83
23000	21.80
24000	21.85
25000	21.96

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

7.6. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

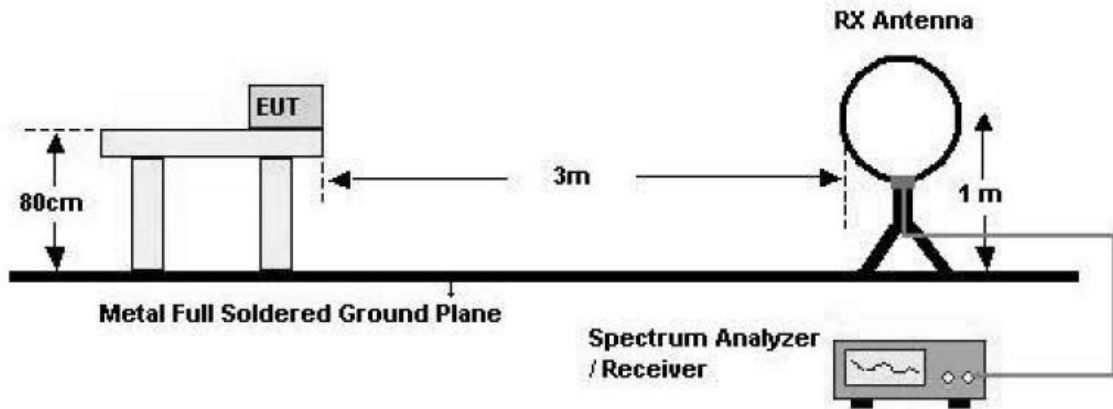

30 MHz - 1 GHz

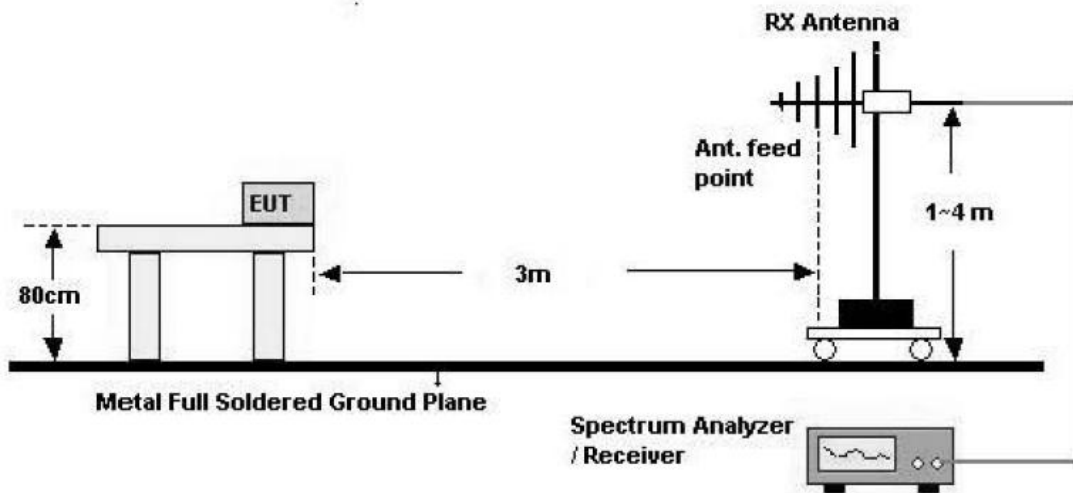

Above 1 GHz

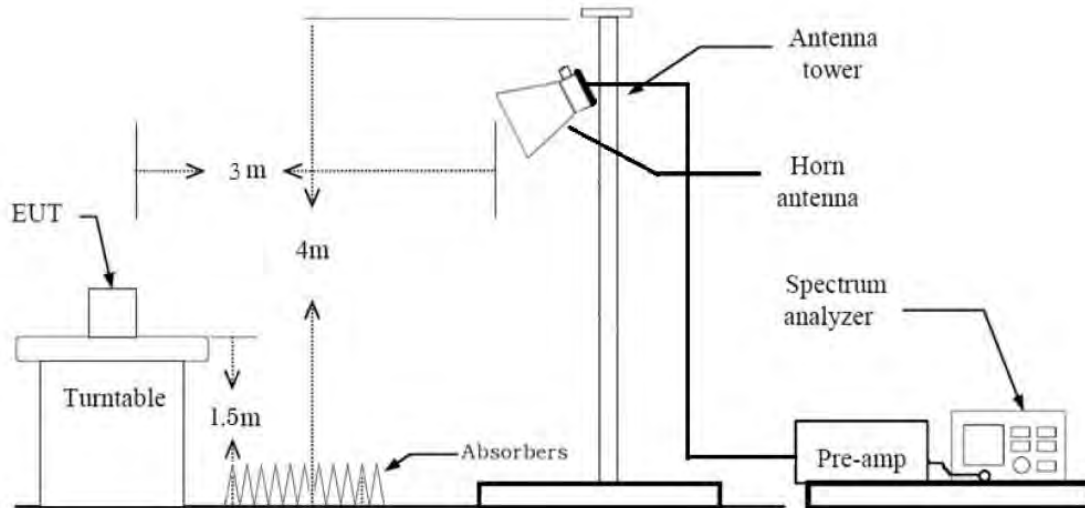

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered

that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20 \log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

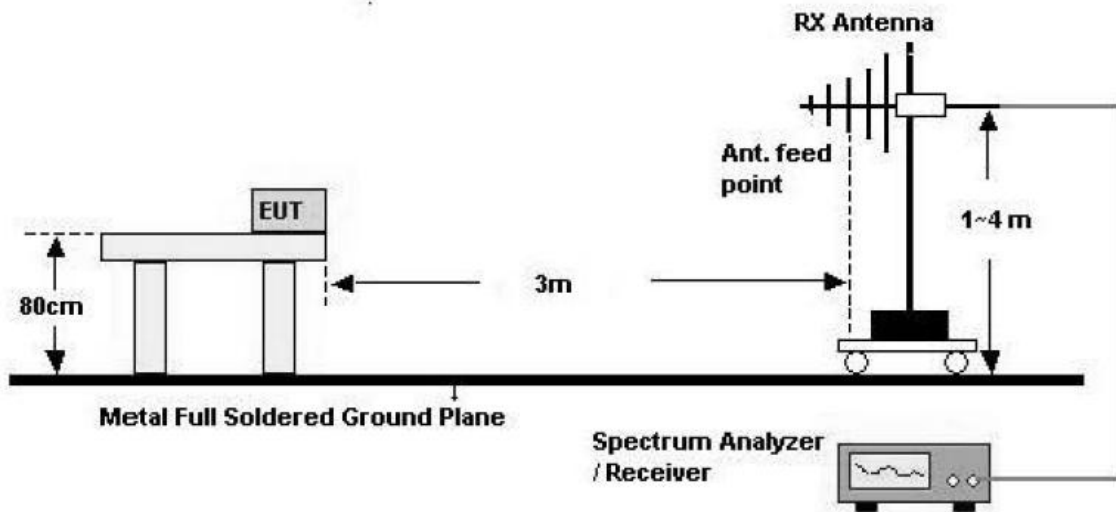

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

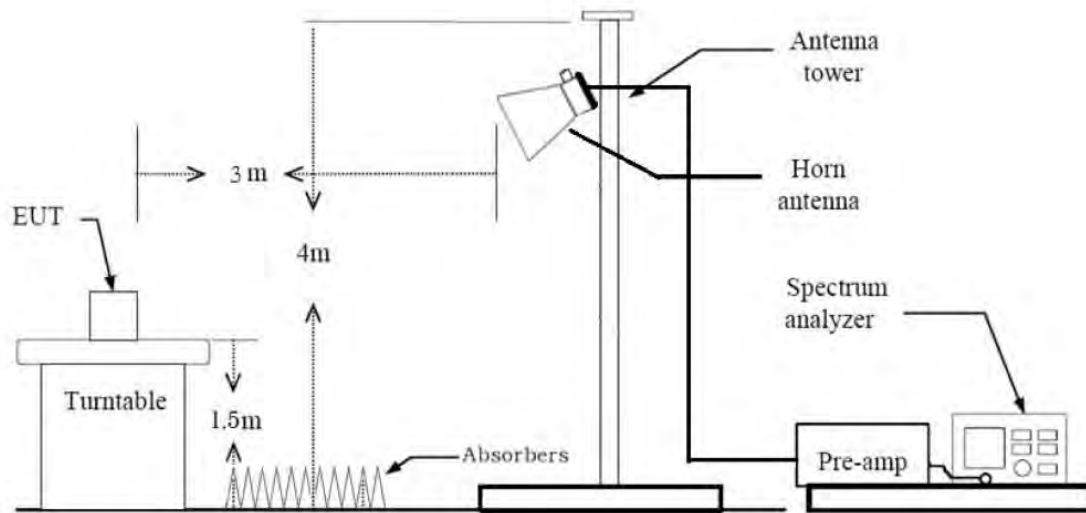

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

7.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD,SDM)
 - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
4. Test was performed with continuous Tx.
5. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n : MCS0
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories (Notebook)

Conducted test

1. The EUT was configured with data rate of highest power.
2. SISO & MIMO were tested and the all case results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(MIMO)

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

ISED Part

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		N/A (Note1)
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS

9. TEST RESULT

9.1 DUTY CYCLE

Mode	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	-	-	-	-
802.11g	-	-	-	-
802.11n (HT20)	-	-	-	-
802.11n (HT40)	-	-	-	-

Note:

1. Duty Cycle Factor = $10 \times \log(1/\text{Duty Cycle})$. where, Duty Cycle = T_{on} / T_{total}
2. Test was performed with continuous Tx.

9.2 6dB BANDWIDTH & 99 % BANDWIDTH

FCC

[ANT1]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	9.090	> 0.5
2437	6	8.590	> 0.5
2462	11	8.013	> 0.5
2467	12	8.783	> 0.5
2472	13	8.276	> 0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.33	> 0.5
2437	6	16.31	> 0.5
2462	11	16.38	> 0.5
2467	12	16.44	> 0.5
2472	13	16.38	> 0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.60	> 0.5
2437	6	17.65	> 0.5
2462	11	17.69	> 0.5
2467	12	17.67	> 0.5
2472	13	17.61	> 0.5

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.40	> 0.5
2437	6	36.39	> 0.5
2452	9	36.45	> 0.5

[ANT2]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.681	> 0.5
2437	6	7.735	> 0.5
2462	11	8.458	> 0.5
2467	12	8.427	> 0.5
2472	13	8.446	> 0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.40	> 0.5
2437	6	16.41	> 0.5
2462	11	16.09	> 0.5
2467	12	16.45	> 0.5
2472	13	16.37	> 0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.56	> 0.5
2437	6	17.64	> 0.5
2462	11	17.69	> 0.5
2467	12	17.57	> 0.5
2472	13	17.67	> 0.5

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.11	> 0.5
2437	6	36.12	> 0.5
2452	9	36.45	> 0.5


[ANT1]

▣ Test Plots


6dB Bandwidth plot (802.11b-CH 11)




6dB Bandwidth plot (802.11g-CH 6)

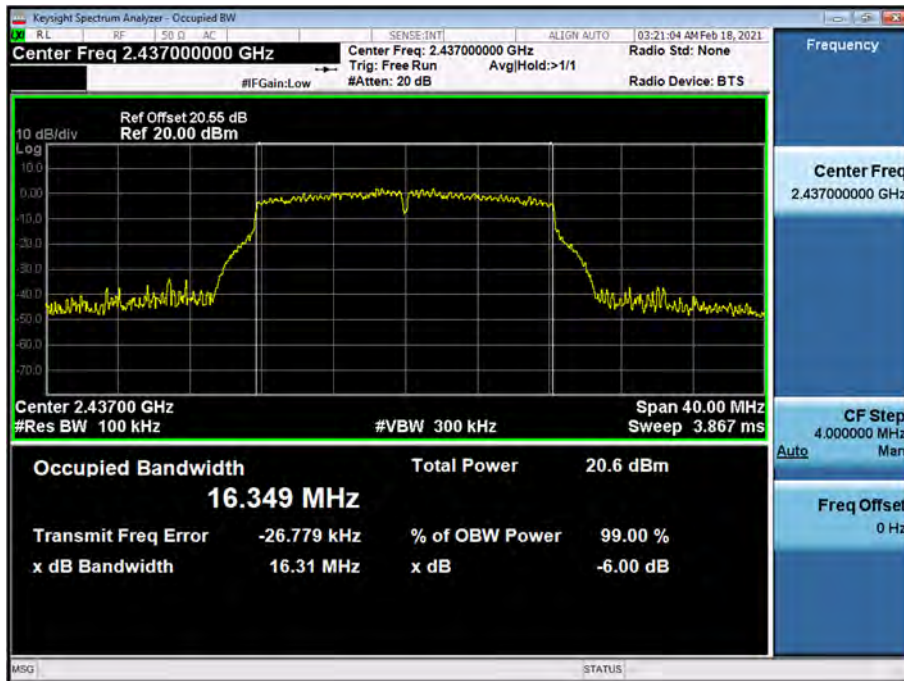

6dB Bandwidth plot (802.11n_HT20-CH 1)

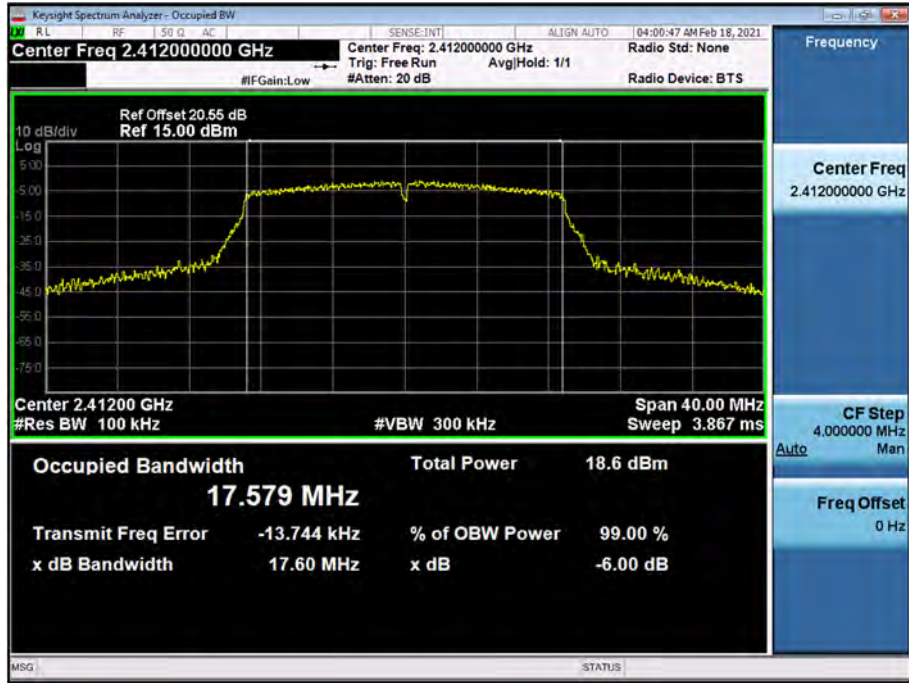


6dB Bandwidth plot (802.11n_HT40-CH 6)

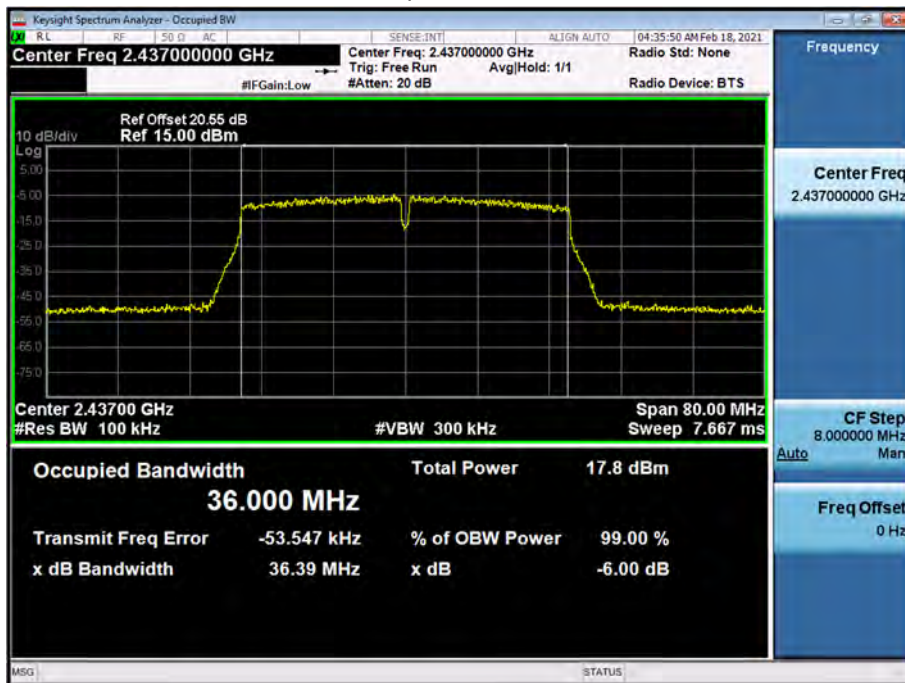


[ANT2]

▣ Test Plots


6dB Bandwidth plot (802.11b-CH 6)

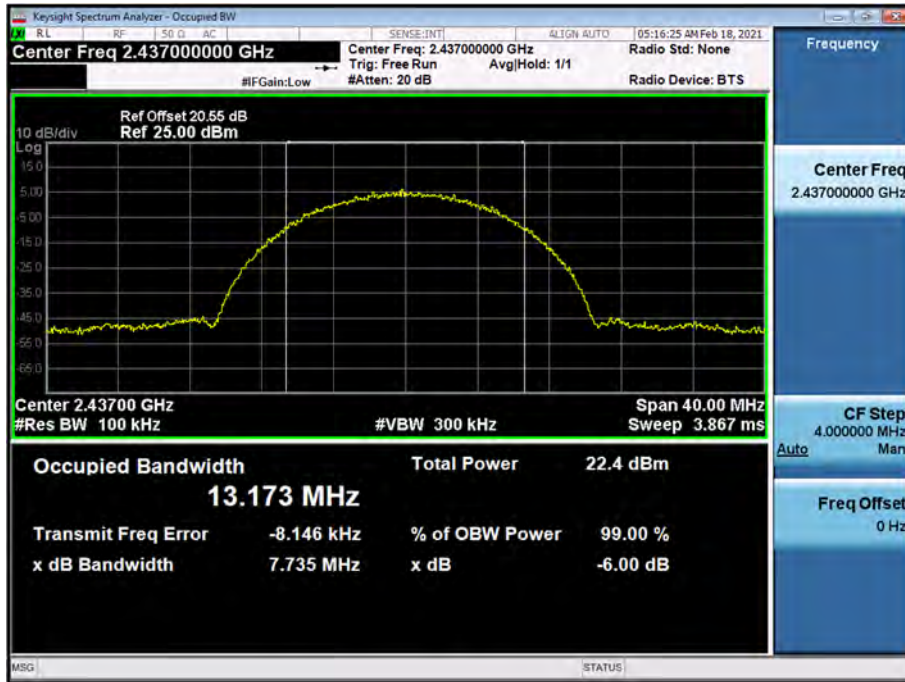


6dB Bandwidth plot (802.11g-CH 11)

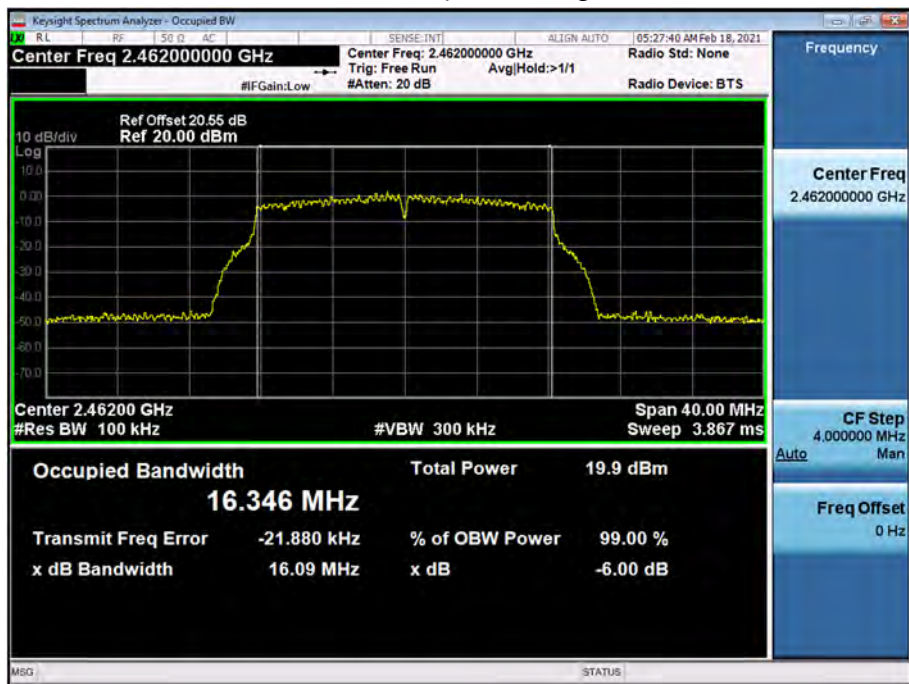

6dB Bandwidth plot (802.11n_HT20-CH 1)

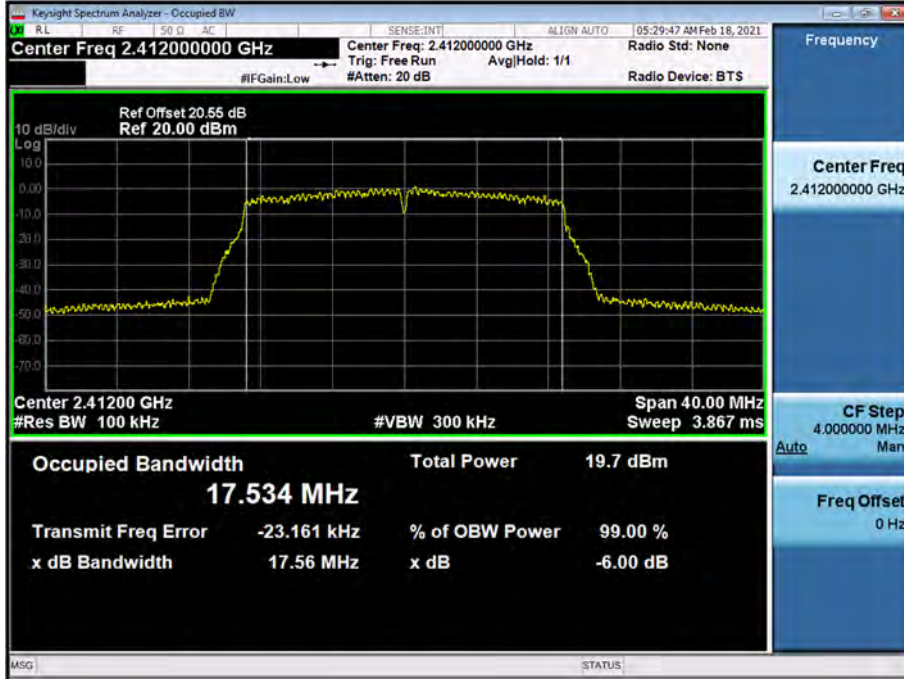

6dB Bandwidth plot (802.11n_HT40-CH 1)

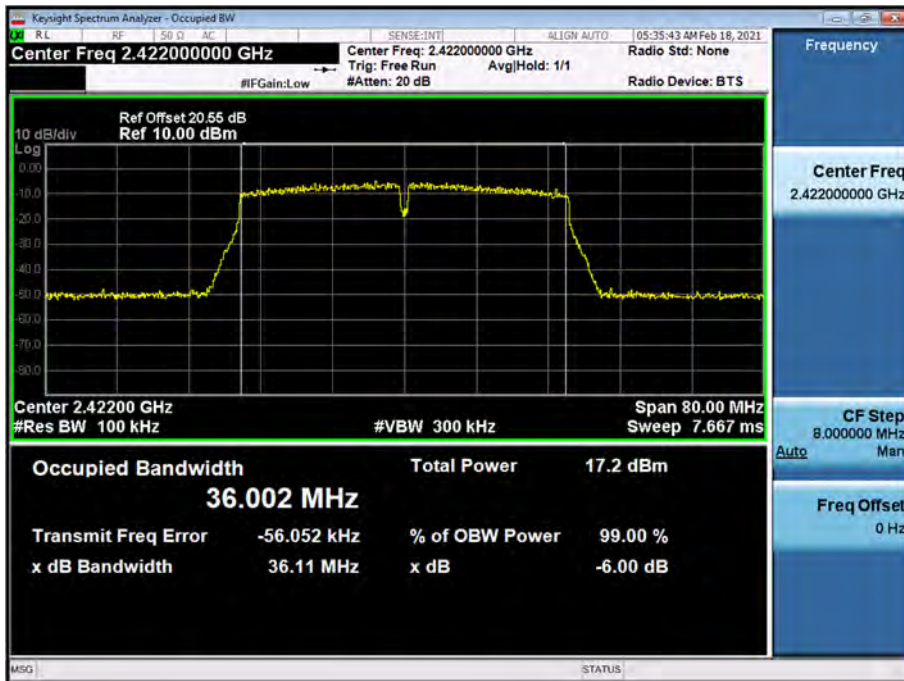

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

99% Bandwidth Measurements(ISED)

[ANT1]

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.854	N/A
2437	6	13.284	N/A
2462	11	13.278	N/A
2467	12	13.338	N/A
2472	13	13.285	N/A

802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.893	N/A
2437	6	16.616	N/A
2462	11	16.638	N/A
2467	12	16.653	N/A
2472	13	16.625	N/A

802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.856	N/A
2437	6	17.772	N/A
2462	11	17.789	N/A
2467	12	17.730	N/A
2472	13	17.769	N/A

802.11n(HT40) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.425	N/A
2437	6	36.289	N/A
2452	9	36.285	N/A

[ANT2]

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.209	N/A
2437	6	13.287	N/A
2462	11	13.245	N/A
2467	12	13.240	N/A
2472	13	13.272	N/A


802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.641	N/A
2437	6	16.647	N/A
2462	11	16.654	N/A
2467	12	16.628	N/A
2472	13	16.618	N/A

802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.738	N/A
2437	6	17.753	N/A
2462	11	17.749	N/A
2467	12	17.700	N/A
2472	13	17.718	N/A

802.11n(HT40) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.298	N/A
2437	6	36.304	N/A
2452	9	36.337	N/A

▣ Test Plots_[ANT1]


99% Bandwidth plot (802.11b-CH 1)

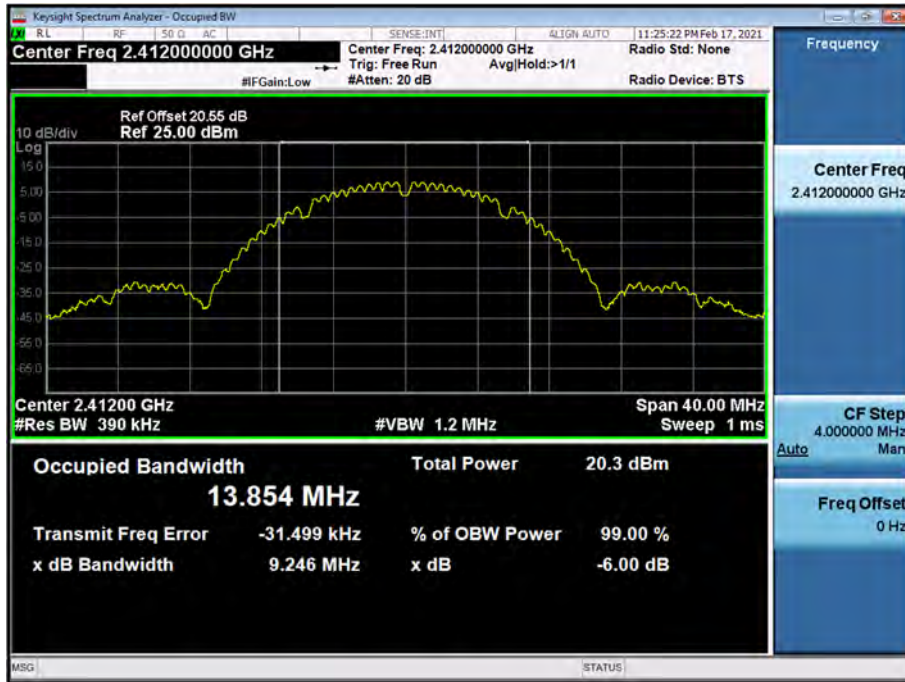


99% Bandwidth plot (802.11g-CH 1)



99% Bandwidth plot (802.11n_HT20-CH 1)

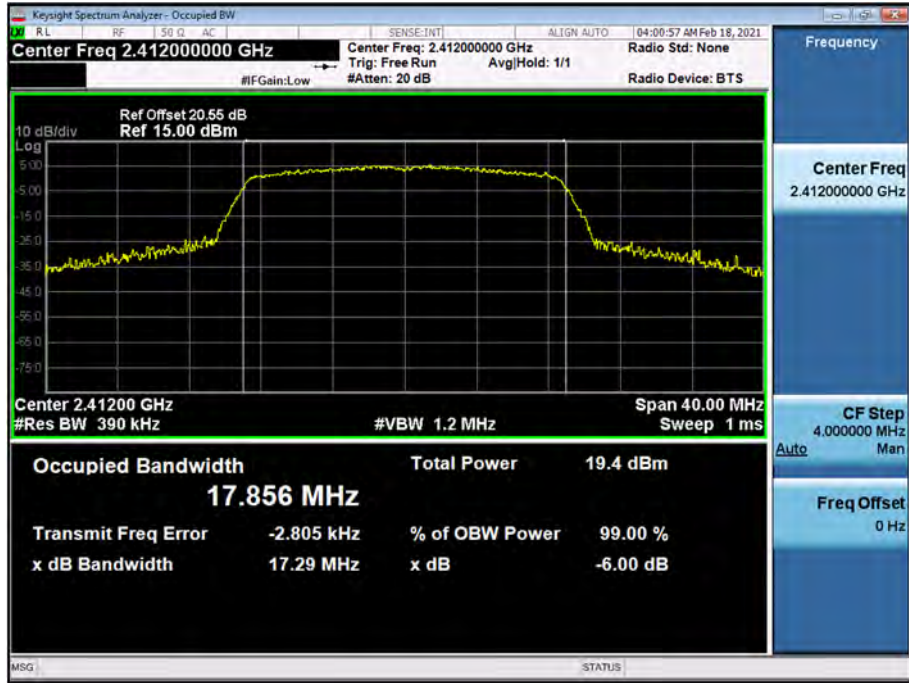

99% Bandwidth plot (802.11n_HT40-CH 3)

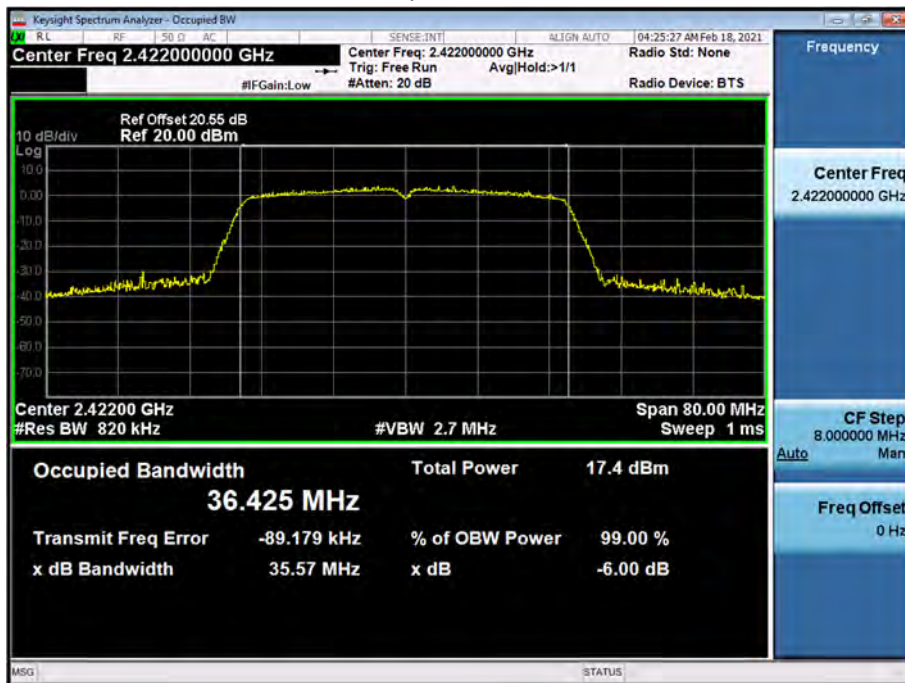


Note:

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

☐ Test Plots_[ANT2]

99% Bandwidth plot (802.11b-CH 6)

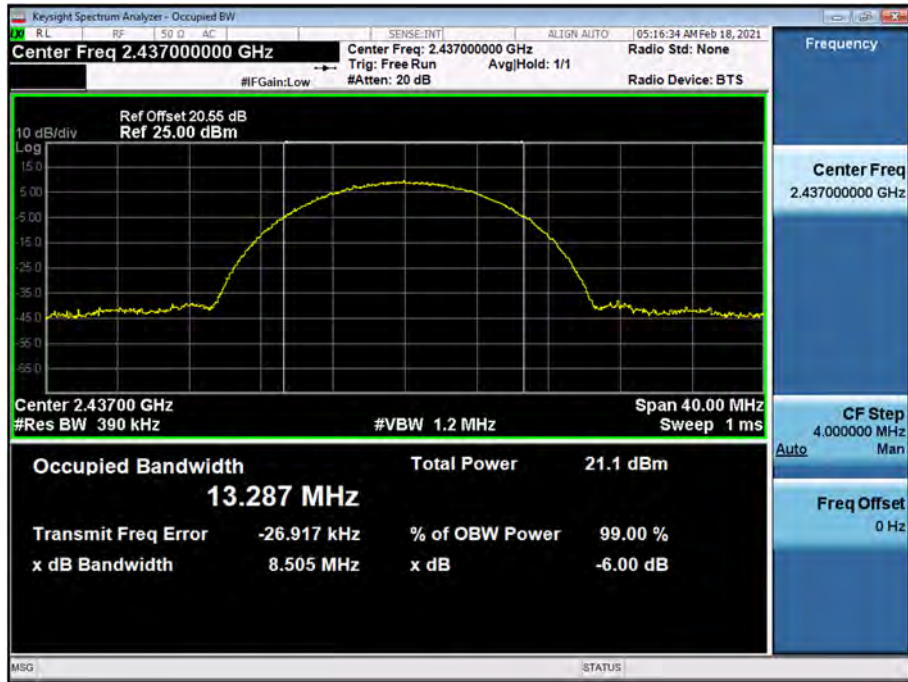


99% Bandwidth plot (802.11g-CH 11)



99% Bandwidth plot (802.11n_HT20-CH 6)



99% Bandwidth plot (802.11n_HT40-CH 9)

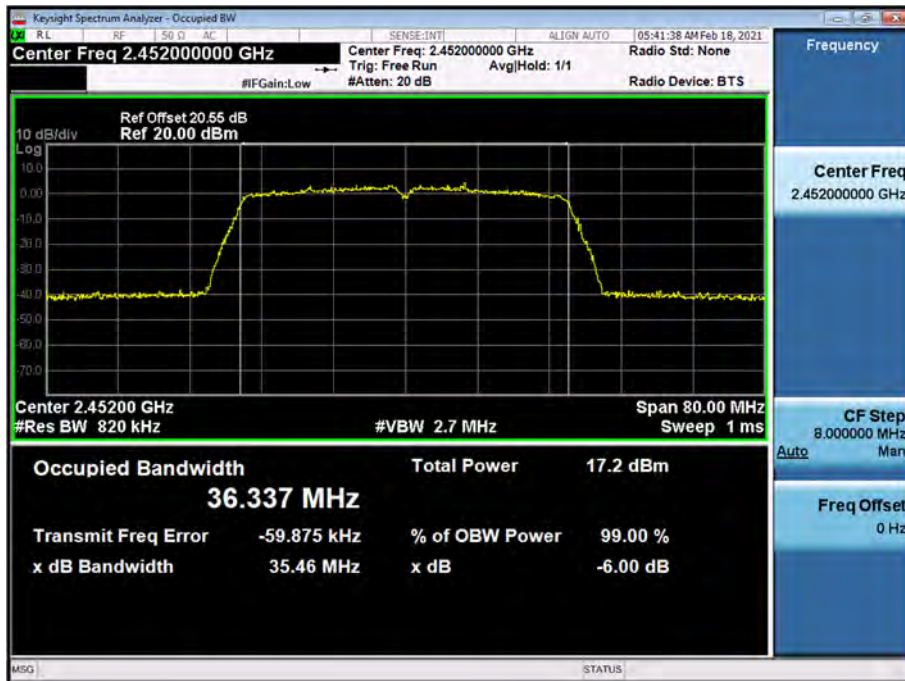

Note:

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss+ Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.55 dB is offset for 2.4 GHz Band

802.11b Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	11 Mbps	19.91	30.00	11.50	19.29	30.00	11.50	182.87	22.62	30.00
2437	6	11 Mbps	20.71	30.00	12.00	19.50	30.00	12.00	206.89	23.16	30.00
2462	11	11 Mbps	21.08	30.00	12.00	20.44	30.00	12.00	238.89	23.78	30.00
2467	12	11 Mbps	21.01	30.00	12.00	19.87	30.00	12.00	223.23	23.49	30.00
2472	13	11 Mbps	18.38	30.00	10.50	18.34	30.00	10.50	137.10	21.37	30.00

802.11g Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	54 Mbps	22.01	30.00	13.00	21.67	30.00	13.00	305.74	24.85	30.00
2437	6	54 Mbps	22.57	30.00	13.00	22.00	30.00	13.00	339.21	25.30	30.00
2462	11	54 Mbps	22.85	30.00	13.00	22.08	30.00	13.00	354.19	25.49	30.00
2467	12	54 Mbps	16.88	30.00	7.50	16.18	30.00	7.50	90.25	19.55	30.00
2472	13	54 Mbps	15.56	30.00	6.00	13.97	30.00	6.00	60.92	17.85	30.00

802.11n(HT20) Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	52 Mbps	21.39	30.00	12.00	21.16	30.00	12.00	268.34	24.29	30.00
2437	6	52 Mbps	21.17	30.00	12.00	20.68	30.00	12.00	247.87	23.94	30.00
2462	11	52 Mbps	21.39	30.00	12.00	21.00	30.00	12.00	263.61	24.21	30.00
2467	12	52 Mbps	16.81	30.00	7.50	15.96	30.00	7.50	87.42	19.42	30.00
2472	13	52 Mbps	12.68	30.00	4.00	12.14	30.00	4.00	34.91	15.43	30.00

802.11n(HT40) Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2422	3	52 Mbps	18.98	30.00	9.50	18.62	30.00	9.50	151.85	21.81	30.00
2437	6	52 Mbps	18.58	30.00	9.50	18.35	30.00	9.50	140.50	21.48	30.00
2452	9	52 Mbps	17.40	30.00	8.50	17.69	30.00	8.50	113.70	20.56	30.00

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.55 dB is offset for 2.4 GHz Band.

802.11b Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	11 Mbps	13.66	30.00	11.50	13.08	30.00	11.50	43.55	16.39	30.00
2437	6	11 Mbps	14.54	30.00	12.00	13.90	30.00	12.00	52.99	17.24	30.00
2462	11	11 Mbps	14.43	30.00	12.00	14.25	30.00	12.00	54.34	17.35	30.00
2467	12	11 Mbps	14.85	30.00	12.00	13.99	30.00	12.00	55.61	17.45	30.00
2472	13	11 Mbps	13.27	30.00	10.50	12.00	30.00	10.50	37.08	15.69	30.00

802.11g Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	54 Mbps	13.19	30.00	13.00	13.50	30.00	13.00	43.23	16.36	30.00
2437	6	54 Mbps	13.79	30.00	13.00	13.30	30.00	13.00	45.31	16.56	30.00
2462	11	54 Mbps	14.08	30.00	13.00	13.33	30.00	13.00	47.12	16.73	30.00
2467	12	54 Mbps	8.22	30.00	7.50	7.51	30.00	7.50	12.28	10.89	30.00
2472	13	54 Mbps	6.82	30.00	6.00	5.64	30.00	6.00	8.47	9.28	30.00

802.11n(HT20) Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2412	1	52 Mbps	12.62	30.00	12.00	12.34	30.00	12.00	35.42	15.49	30.00
2437	6	52 Mbps	12.31	30.00	12.00	11.95	30.00	12.00	32.69	15.14	30.00
2462	11	52 Mbps	12.31	30.00	12.00	12.25	30.00	12.00	33.81	15.29	30.00
2467	12	52 Mbps	8.14	30.00	7.50	7.41	30.00	7.50	12.03	10.80	30.00
2472	13	52 Mbps	4.02	30.00	4.00	2.95	30.00	4.00	4.49	6.52	30.00

802.11n(HT40) Mode		Worstcase Datarate (Mbps)	SISO Measured Power						MIMO (CDD)		Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1 (dBm)	Limit (dBm)	PLS	Ant 2 (dBm)	Limit (dBm)	PLS	mW	dBm	
2422	3	52 Mbps	10.07	30.00	9.50	9.81	30.00	9.50	19.73	12.95	30.00
2437	6	52 Mbps	9.71	30.00	9.50	9.52	30.00	9.50	18.30	12.62	30.00
2452	9	52 Mbps	8.54	30.00	8.50	8.77	30.00	8.50	14.67	11.66	30.00

9.4 POWER SPECTRAL DENSITY

[Ant.1]

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm/3 kHz)	Limit (dBm/3 kHz)
802.11b	2412	1	-9.100	8
	2437	6	-6.818	
	2462	11	-7.211	
	2467	12	-6.767	
	2472	13	-9.035	
802.11g	2412	1	-9.557	
	2437	6	-8.482	
	2462	11	-9.858	
	2467	12	-15.710	
	2472	13	-16.054	
802.11n(HT20)	2412	1	-11.808	
	2437	6	-12.345	
	2462	11	-11.275	
	2467	12	-16.672	
	2472	13	-19.720	
802.11n(HT40)	2422	3	-18.185	
	2437	6	-18.309	
	2452	9	-19.219	

[Ant.2]

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm/3 kHz)	Limit (dBm/3 kHz)
802.11b	2412	1	-9.972	8
	2437	6	-8.664	
	2462	11	-8.544	
	2467	12	-8.724	
	2472	13	-9.288	
802.11g	2412	1	-10.664	
	2437	6	-10.320	
	2462	11	-11.041	
	2467	12	-15.996	
	2472	13	-19.153	
802.11n(HT20)	2412	1	-10.920	
	2437	6	-13.340	
	2462	11	-12.757	
	2467	12	-16.614	
	2472	13	-22.271	
802.11n(HT40)	2422	3	-17.078	
	2437	6	-18.077	
	2452	9	-18.486	

[MIMO]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Ant 1 Measured Power (dBm/3 kHz)	Ant 2 Measured Power (dBm/3 kHz)	MIMO (Ant 1 + Ant 2) (dBm/3 kHz)	Limit (dBm/3 kHz)
802.11b	2412	1	-9.100	-9.972	-6.576	8
	2437	6	-6.818	-8.664	-4.559	
	2462	11	-7.211	-8.544	-4.815	
	2467	12	-6.767	-8.724	-4.685	
	2472	13	-9.035	-9.288	-6.198	
802.11g	2412	1	-9.557	-10.664	-6.990	
	2437	6	-8.482	-10.320	-6.383	
	2462	11	-9.858	-11.041	-7.447	
	2467	12	-15.710	-15.996	-12.218	
	2472	13	-16.054	-19.153	-15.229	
802.11n(HT20)	2412	1	-11.808	-10.920	-8.239	
	2437	6	-12.345	-13.340	-9.586	
	2462	11	-11.275	-12.757	-9.208	
	2467	12	-16.672	-16.614	-13.979	
	2472	13	-19.720	-22.271	-16.990	
802.11n(HT40)	2422	3	-18.185	-17.078	-13.979	
	2437	6	-18.309	-18.077	-15.229	
	2452	9	-19.219	-18.486	-16.990	

Note :

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.


2. Spectrum offset = Attenuator loss(20 dB) + Cable loss(1ea)

3. 20.55 dB is offset for 2.4 GHz Band.


[Ant1]

▣ Test Plots


Power Spectral Density (802.11b-CH 12)

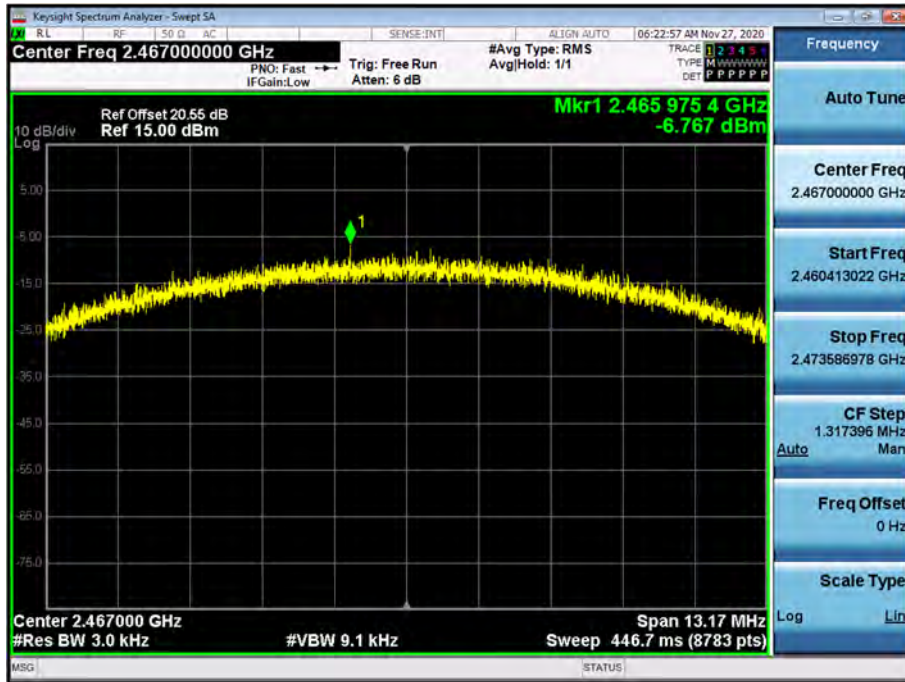


Power Spectral Density (802.11g-CH 6)

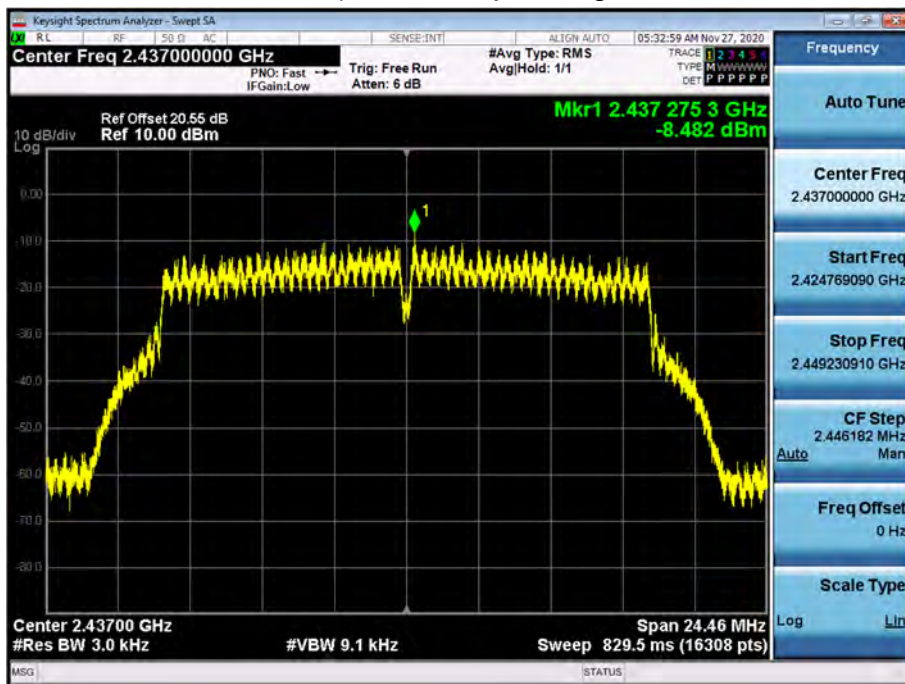

Power Spectral Density (802.11n_HT20 -CH 11)

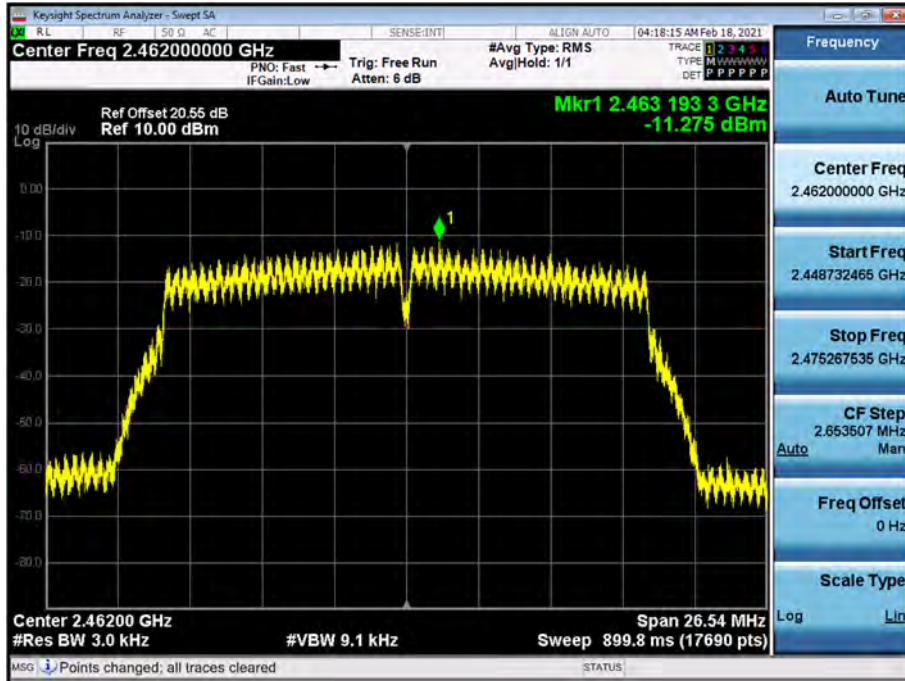

Power Spectral Density (802.11n_HT40 -CH 3)

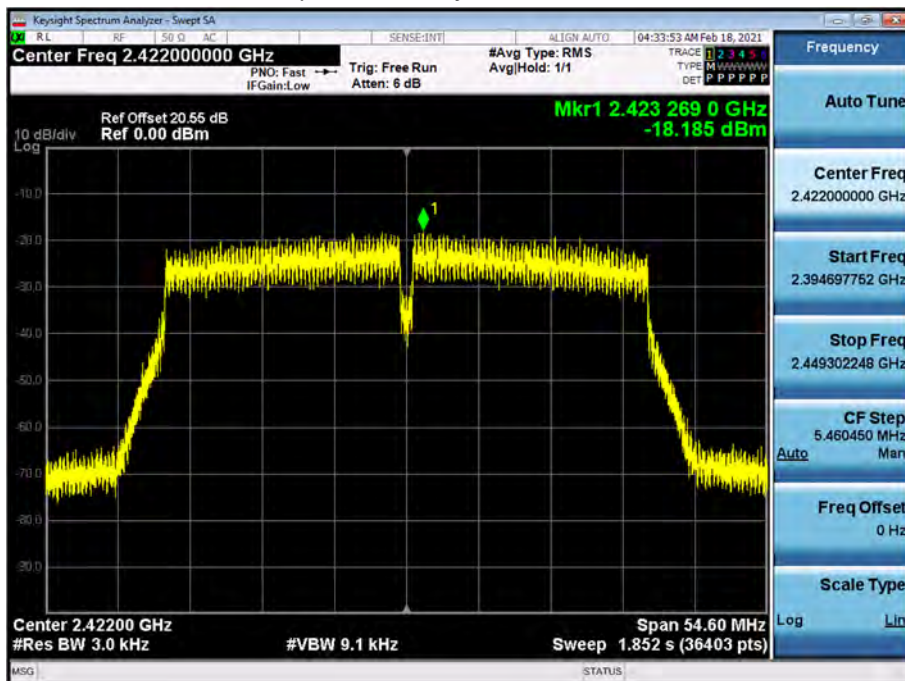


Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.


[Ant2]

▣ Test Plots


Power Spectral Density (802.11b-CH 11)

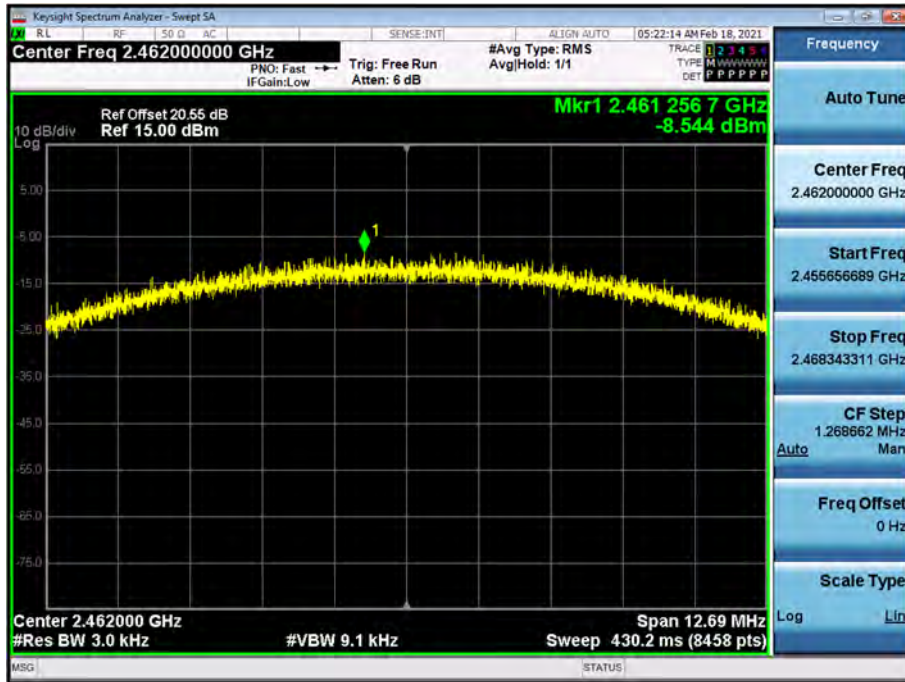


Power Spectral Density (802.11g-CH 6)

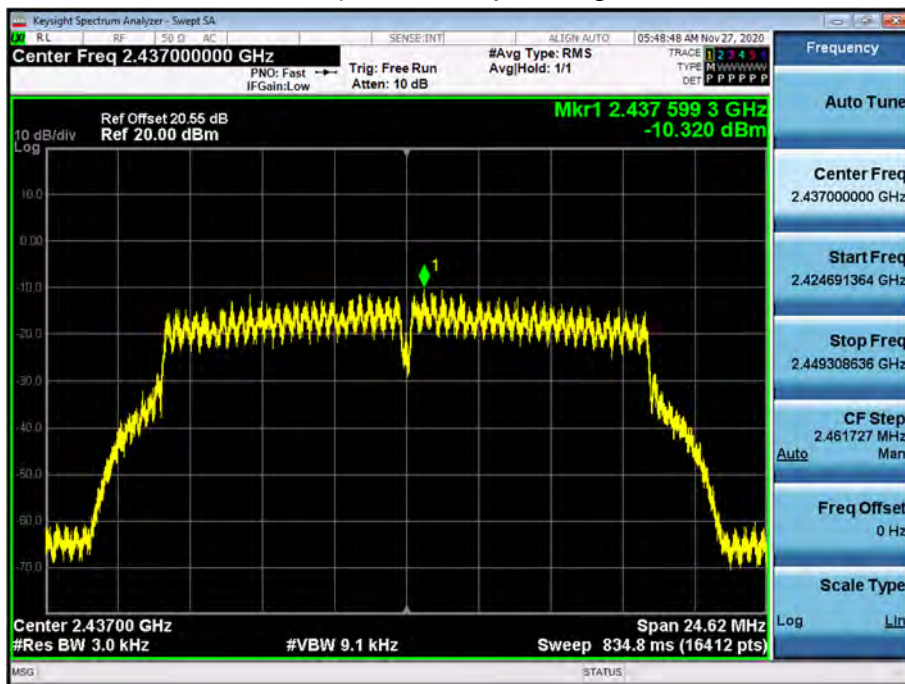

Power Spectral Density (802.11n_HT20 - CH 1)

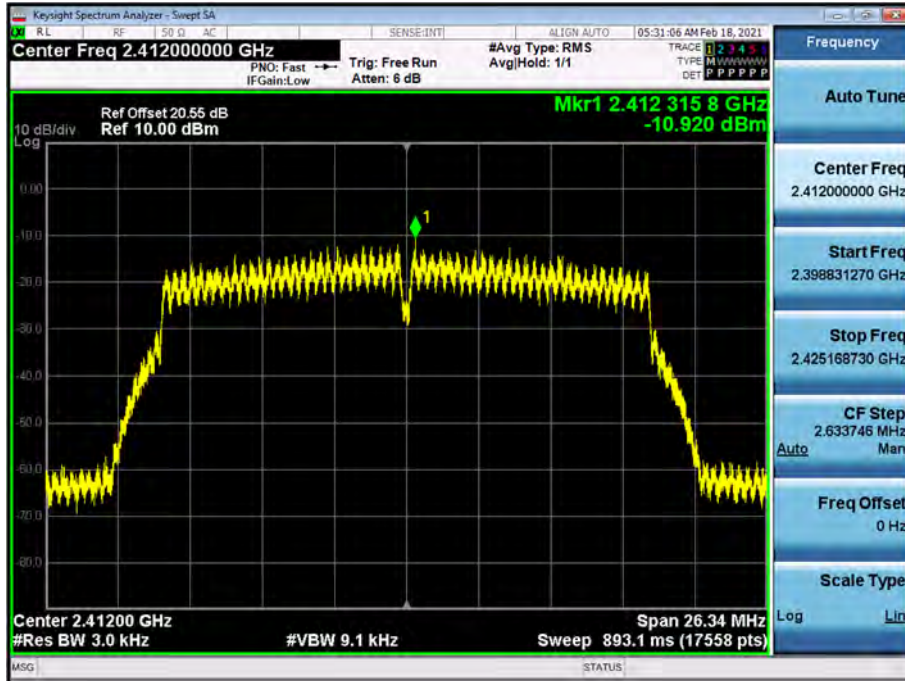

Power Spectral Density (802.11n_HT40 - CH 3)

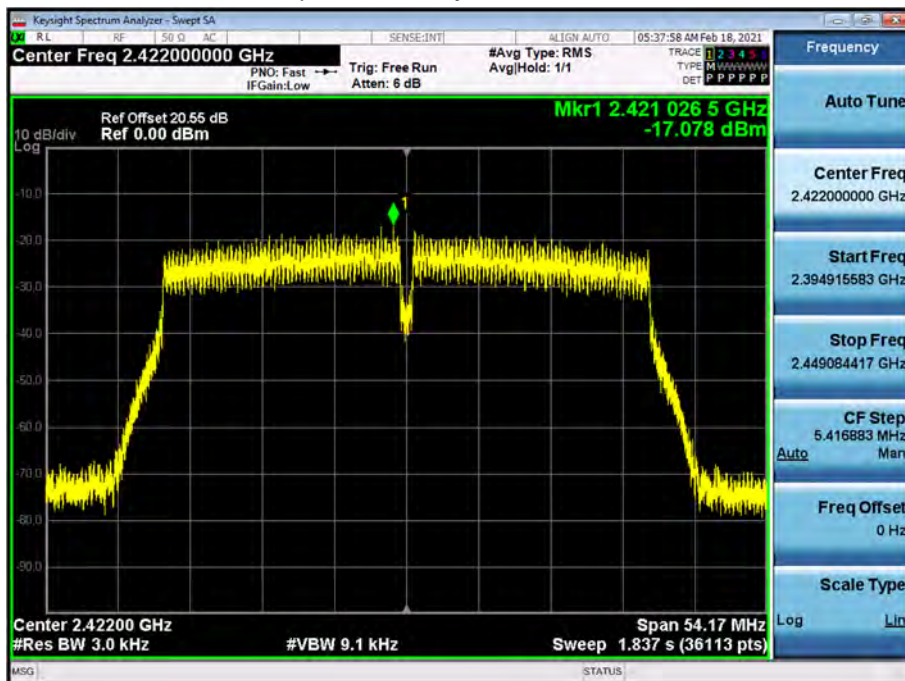

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

[ANT1]

☐ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

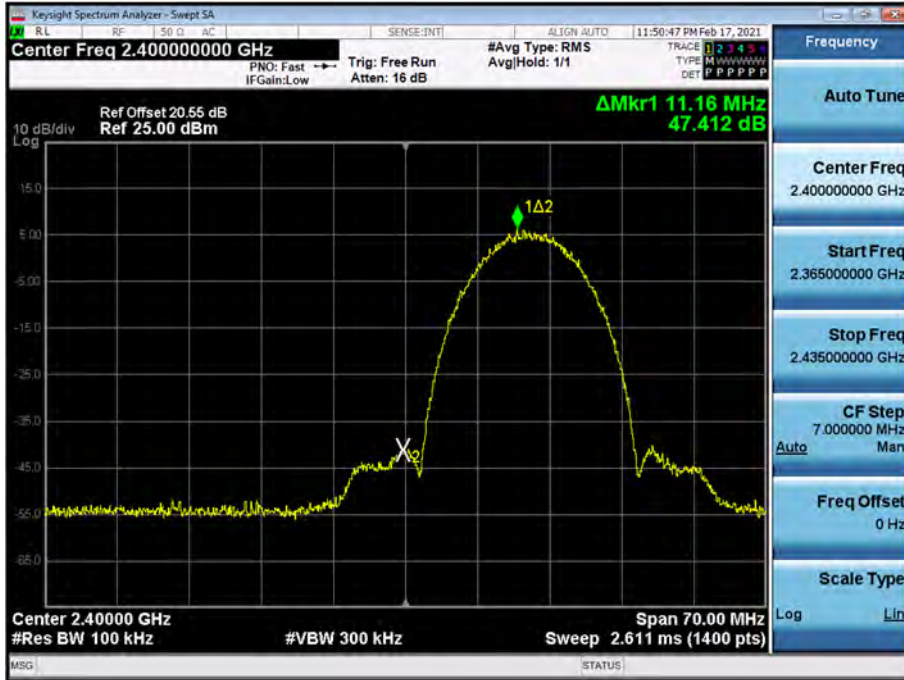


Band Edge (802.11b-CH11)




Band Edge (802.11b-CH12)

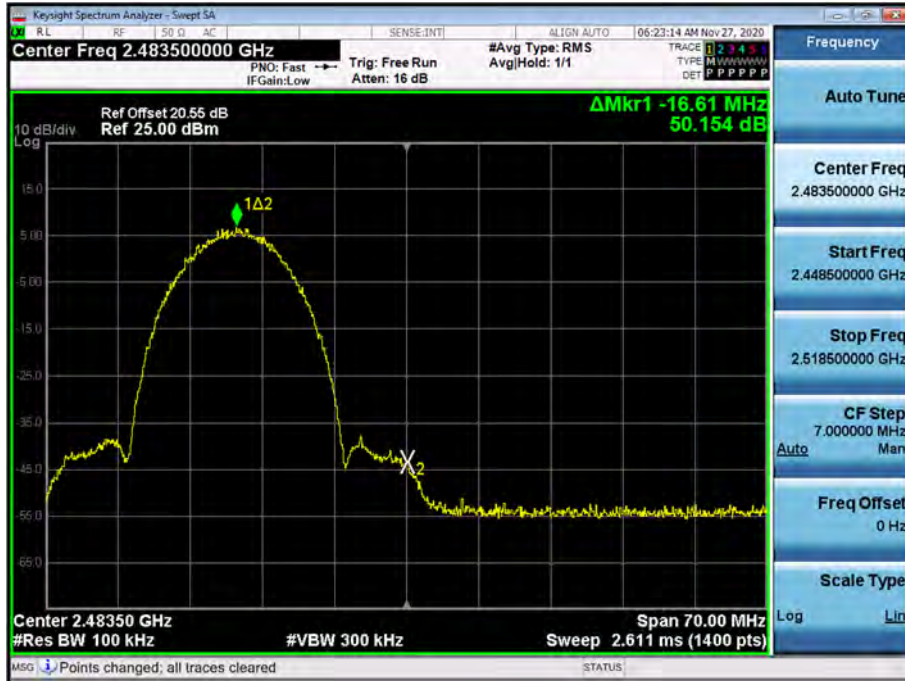


Band Edge (802.11b-CH13)

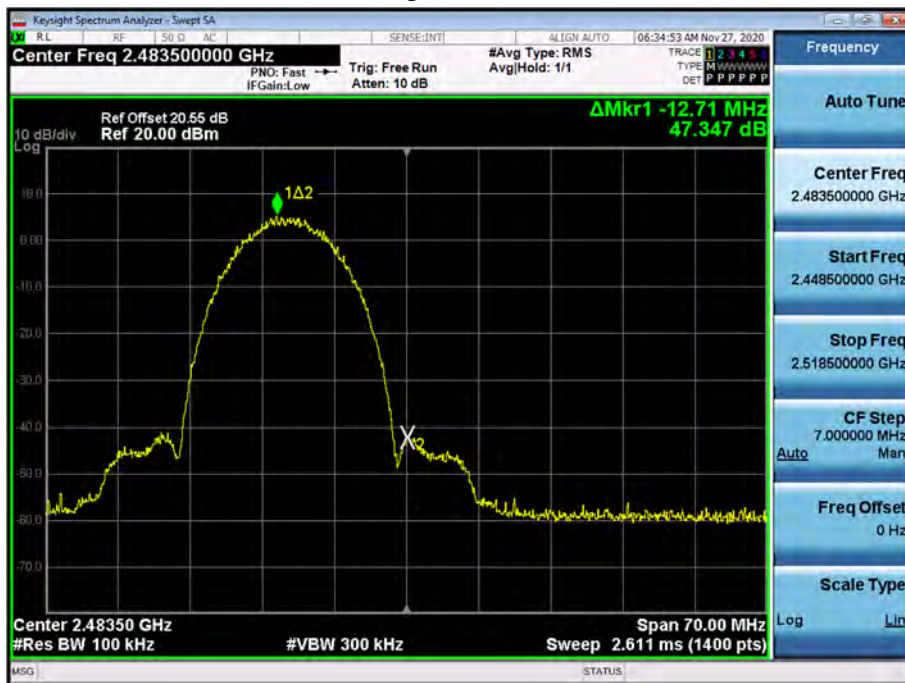

Band Edge (802.11g-CH1)

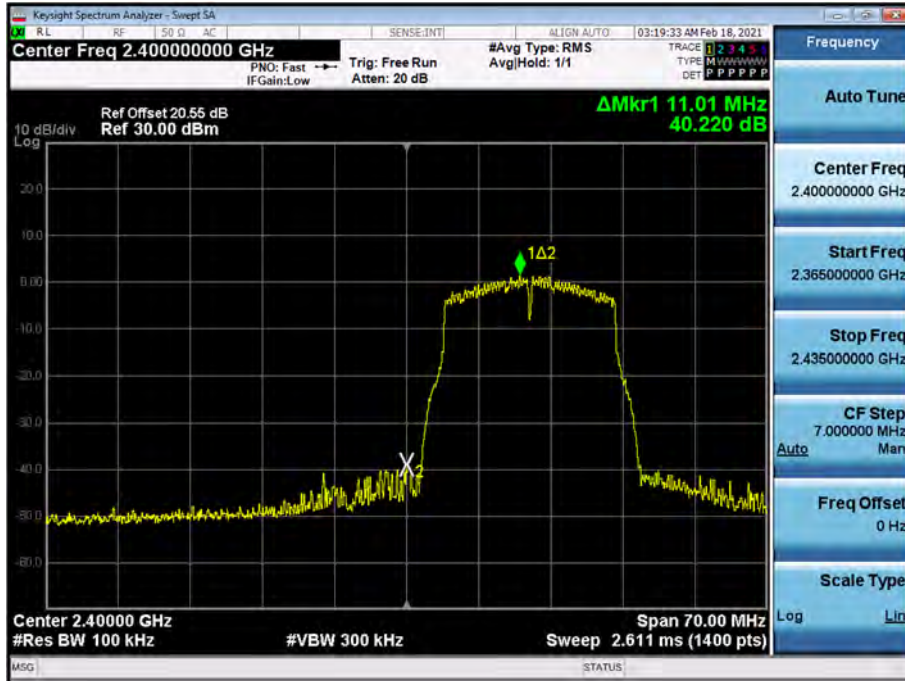

Band Edge (802.11g-CH11)

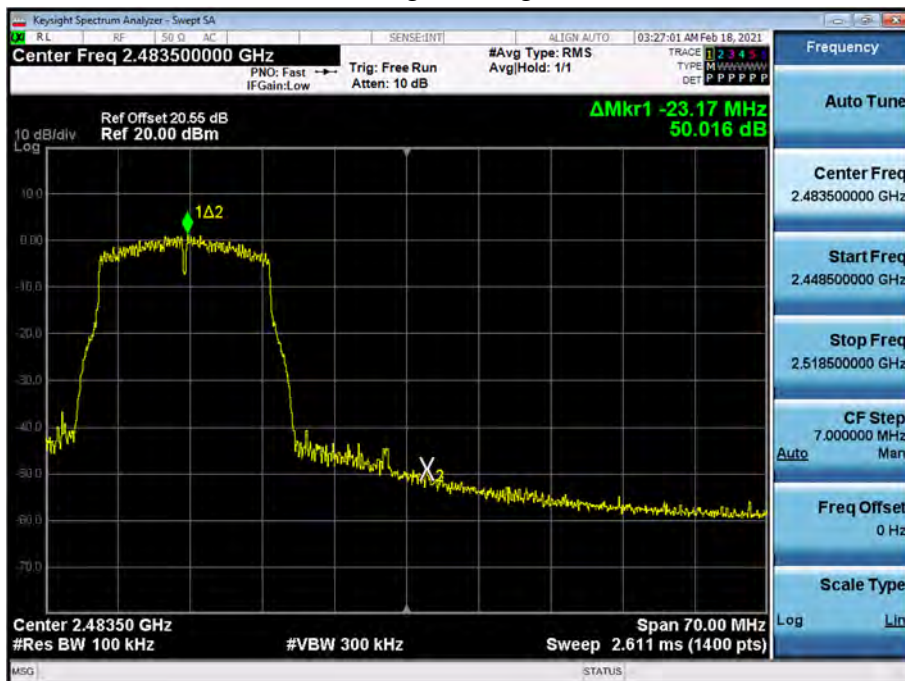


Band Edge (802.11g-CH12)




Band Edge (802.11g-CH13)



Band Edge (802.11n_HT20 -CH1)

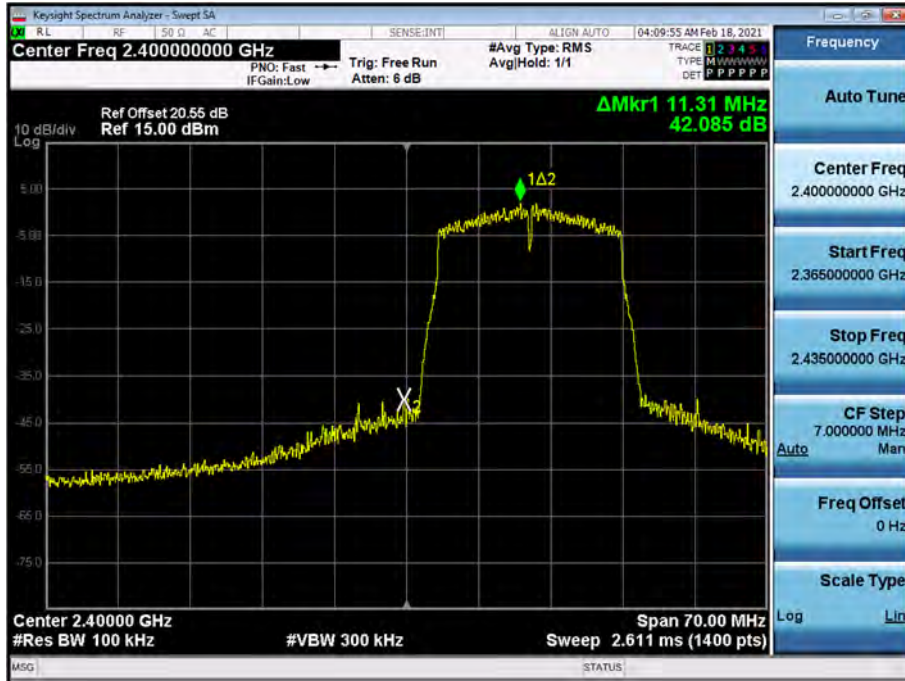


Band Edge (802.11n_HT20 -CH11)

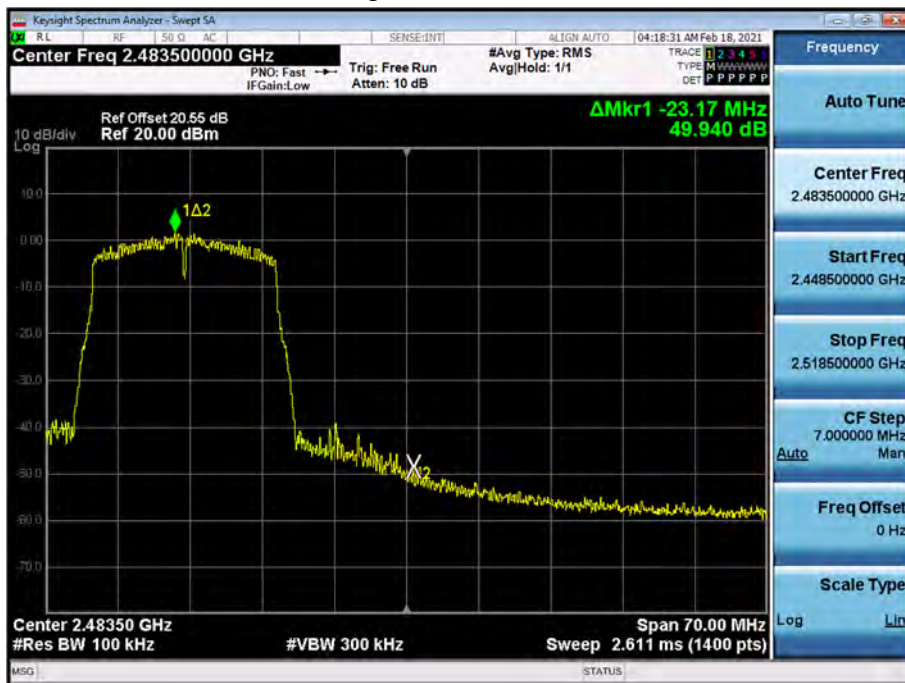


Band Edge (802.11n_HT20 -CH12)




Band Edge (802.11n_HT20 -CH13)

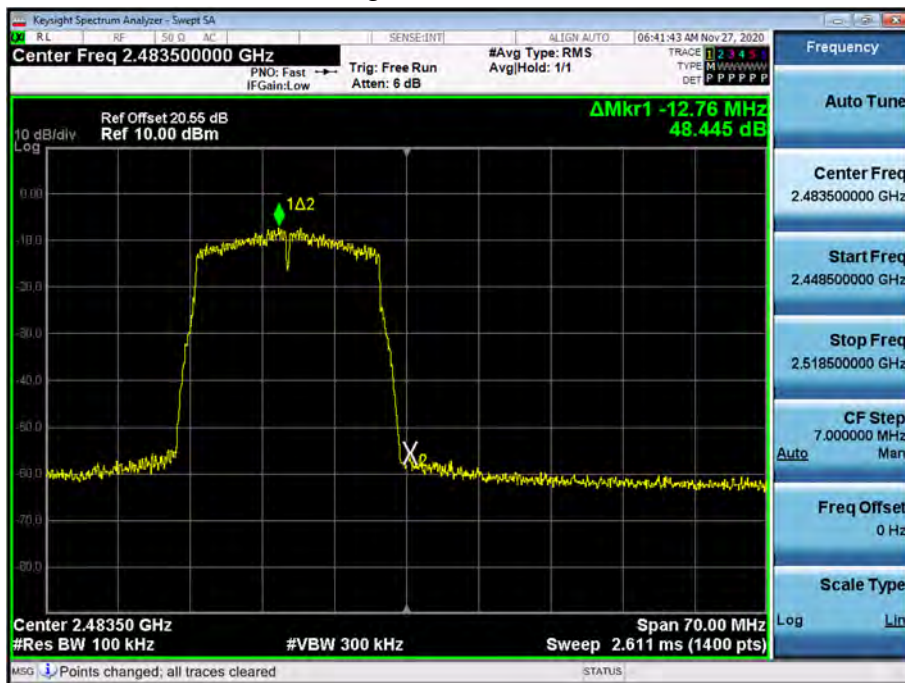

Band Edge (802.11n_HT40 -CH3)

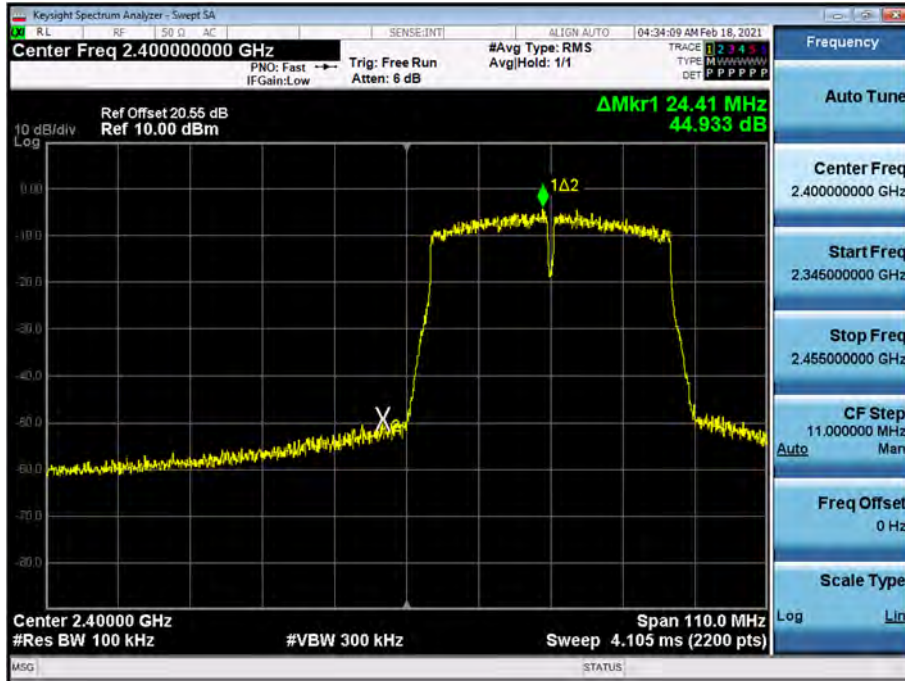


Band Edge (802.11n_HT40 -CH9)

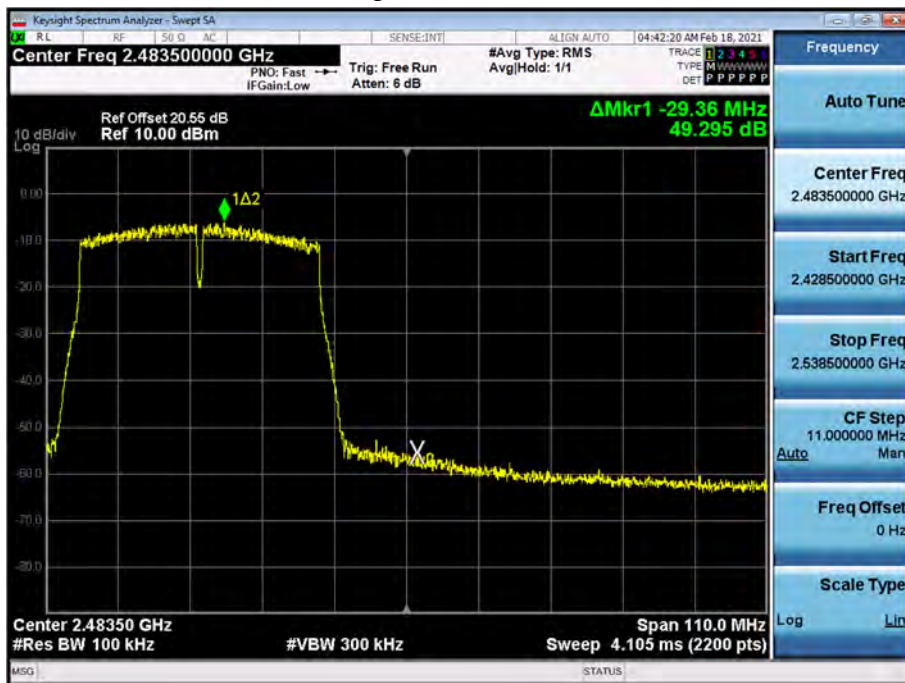

☐ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

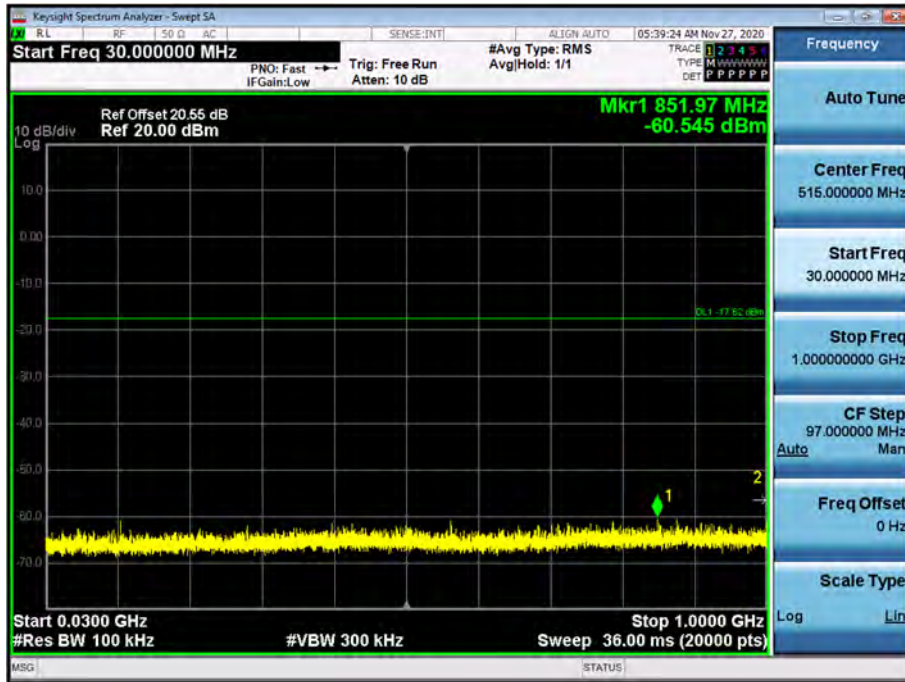


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

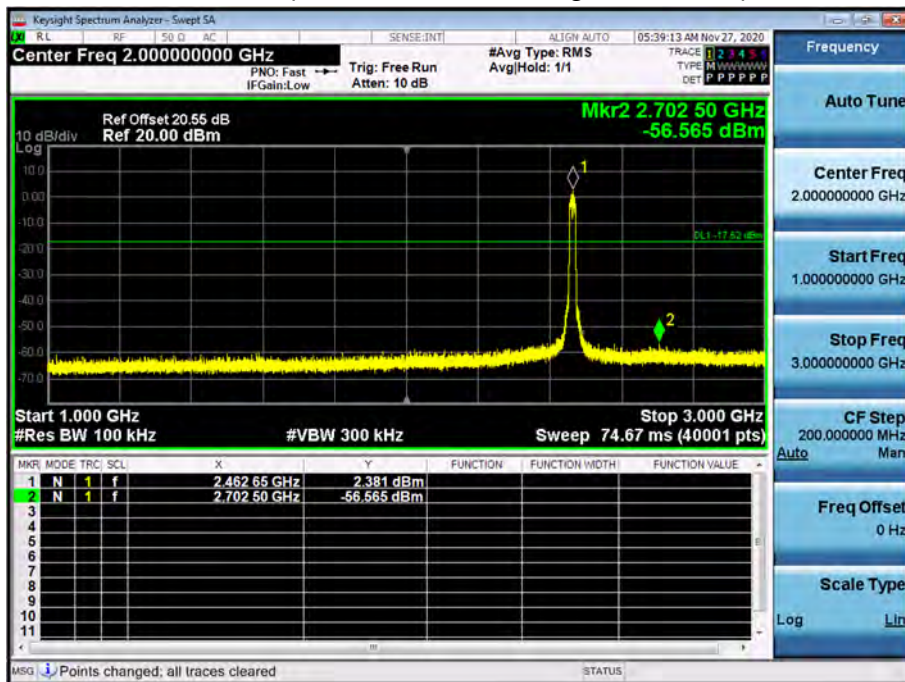


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

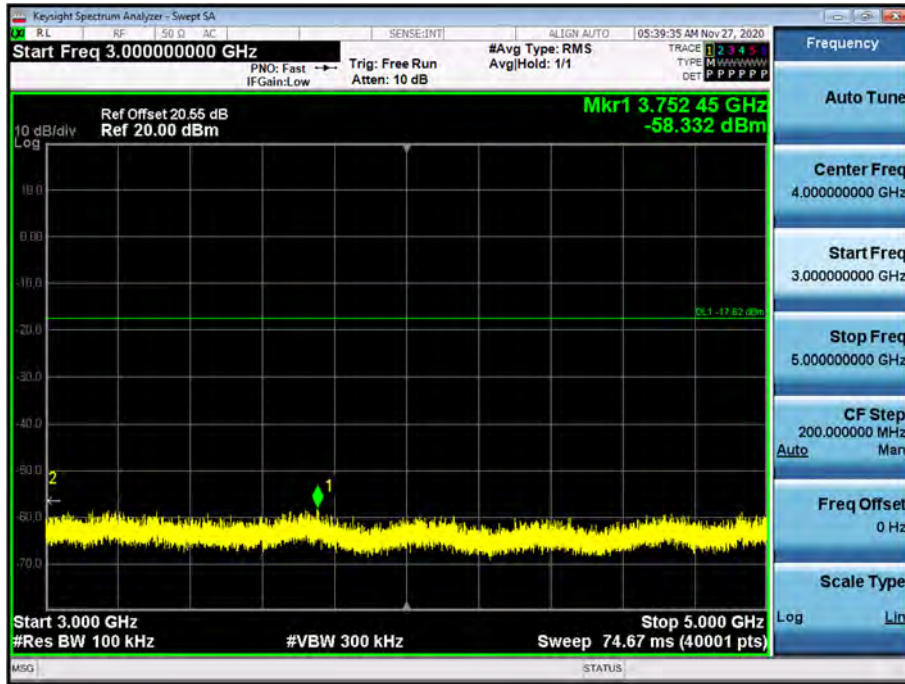


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

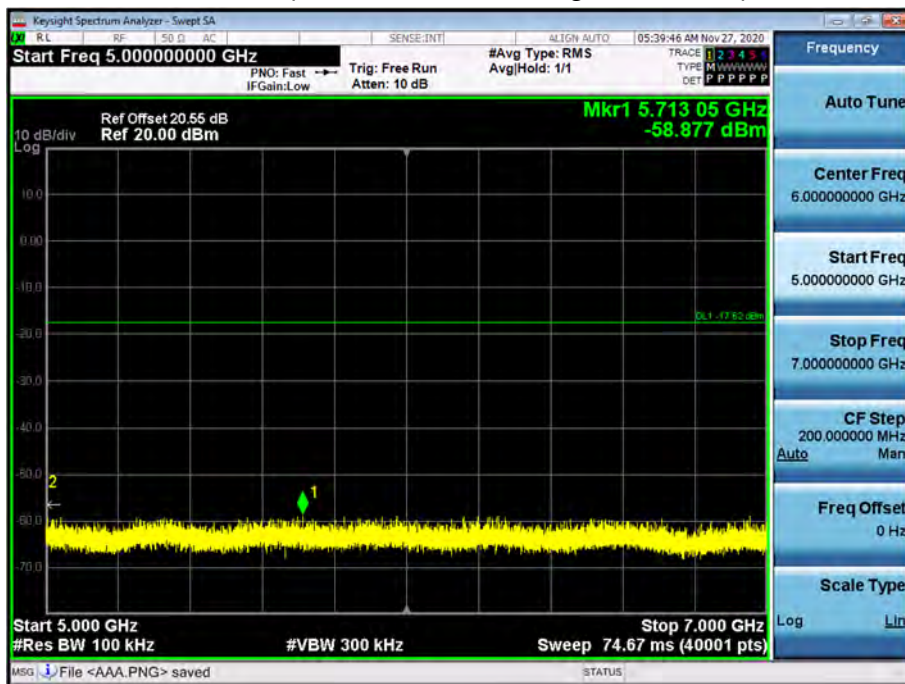


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

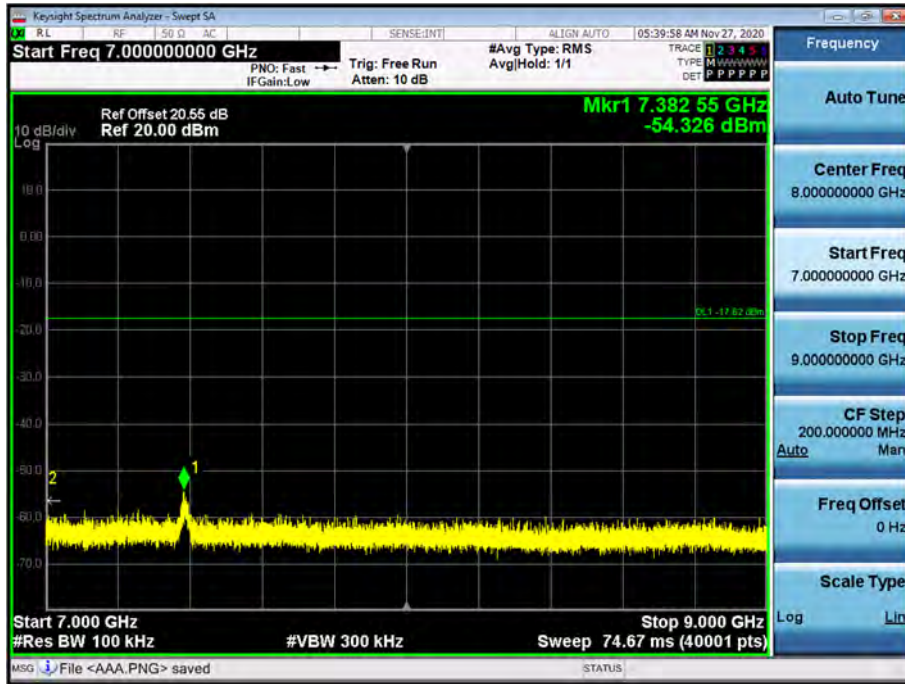


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

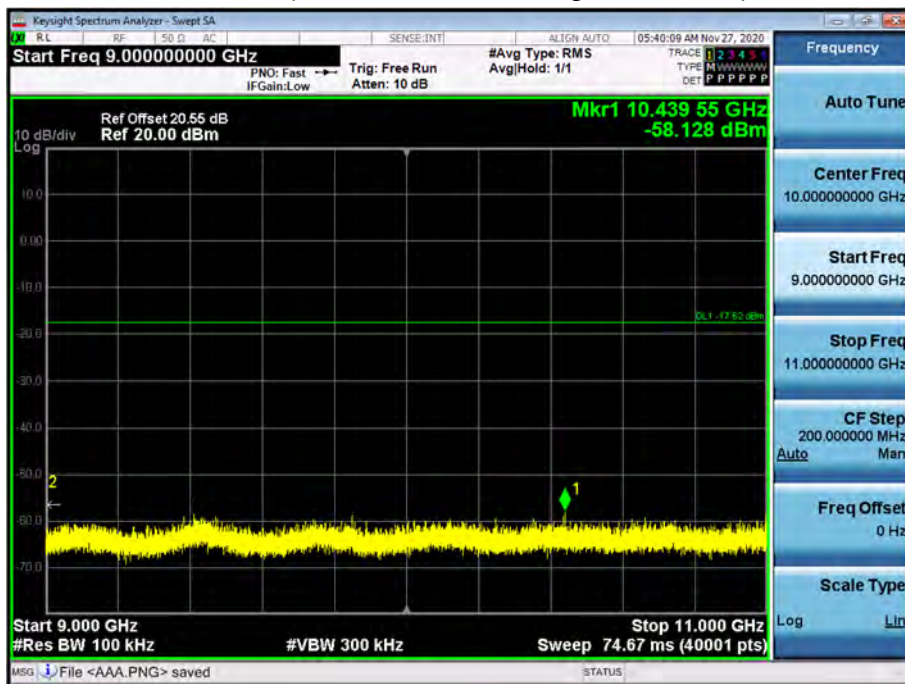


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

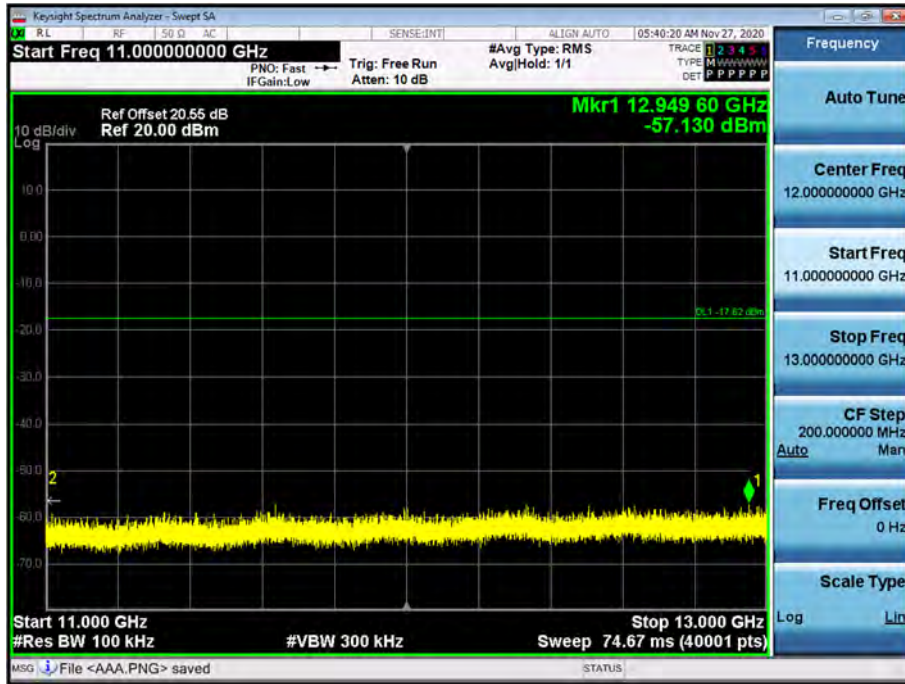


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

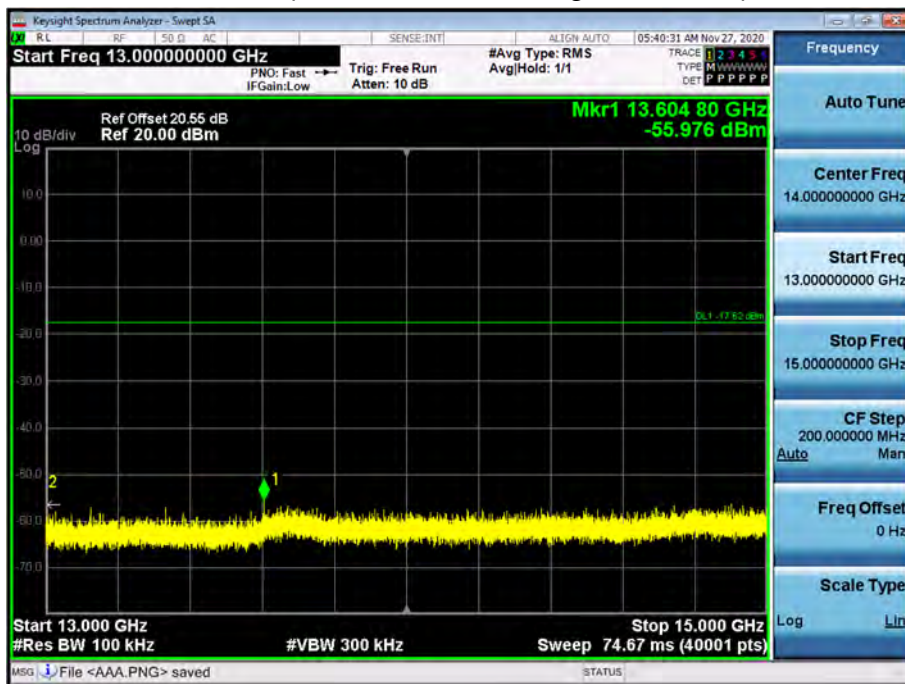


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

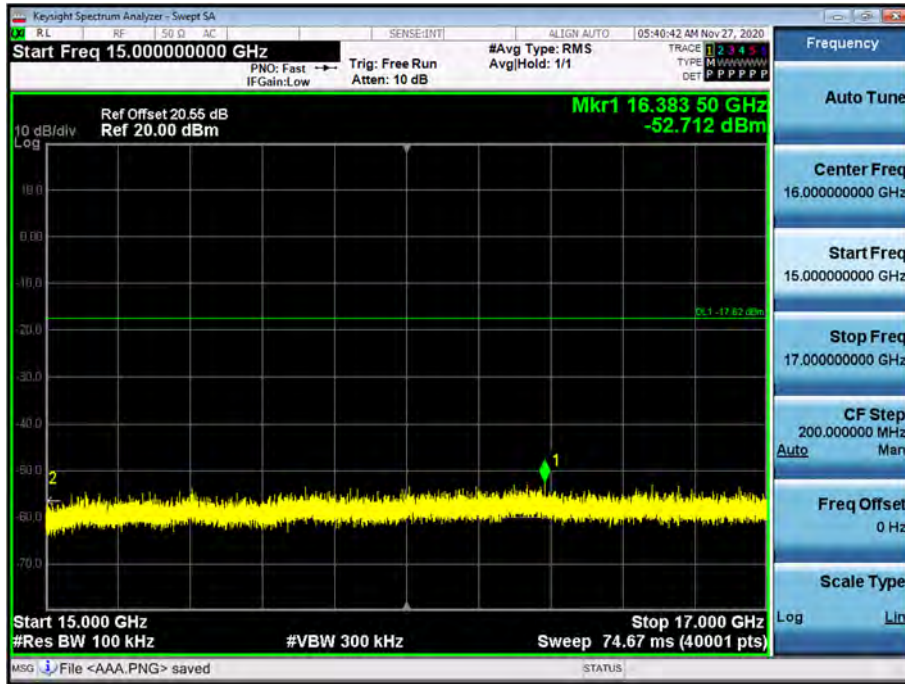


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

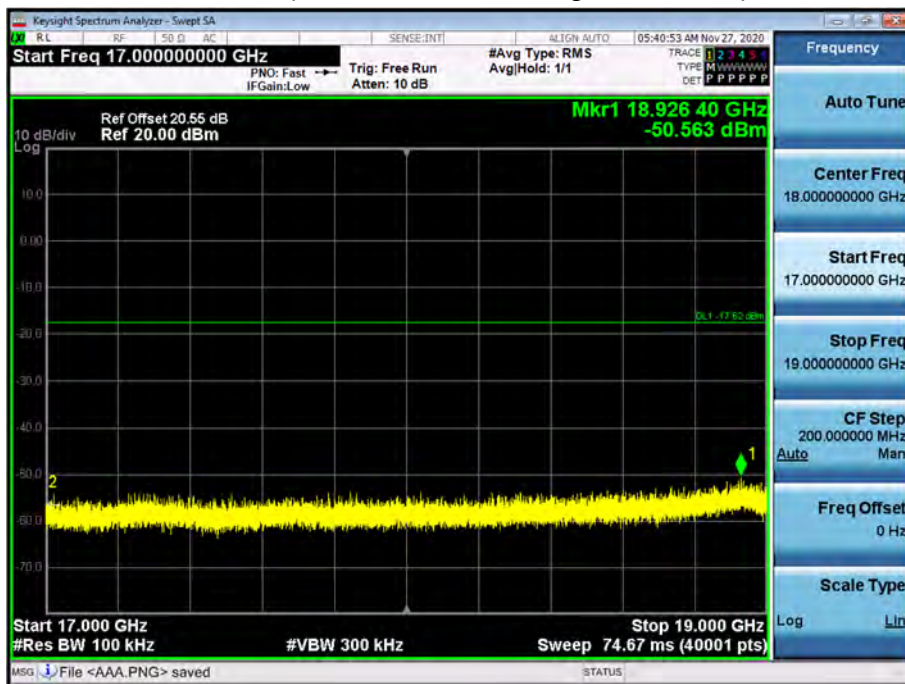


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

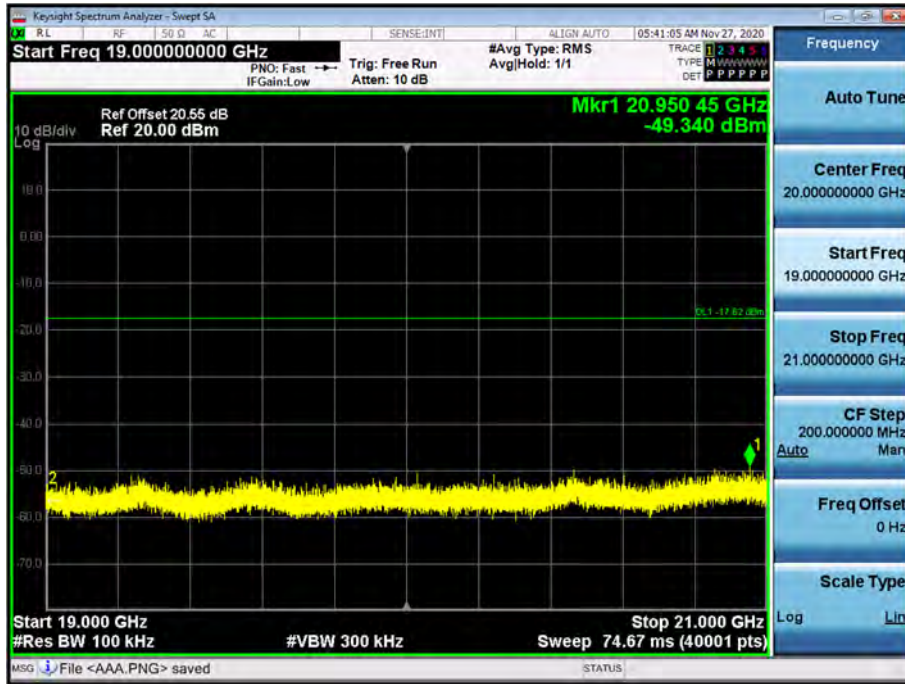


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

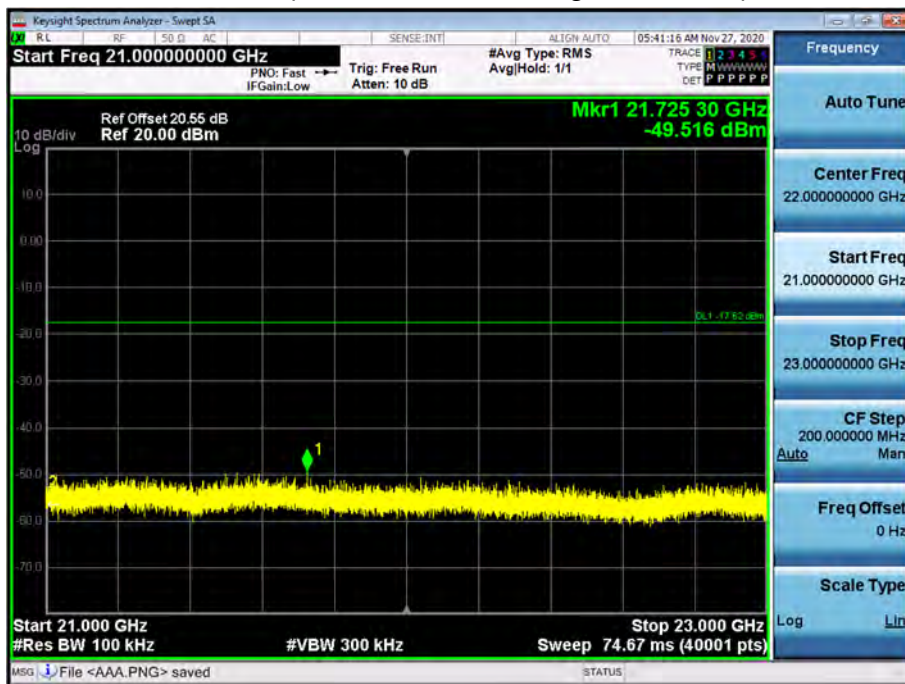

23 GHz ~ 25 GHz


Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

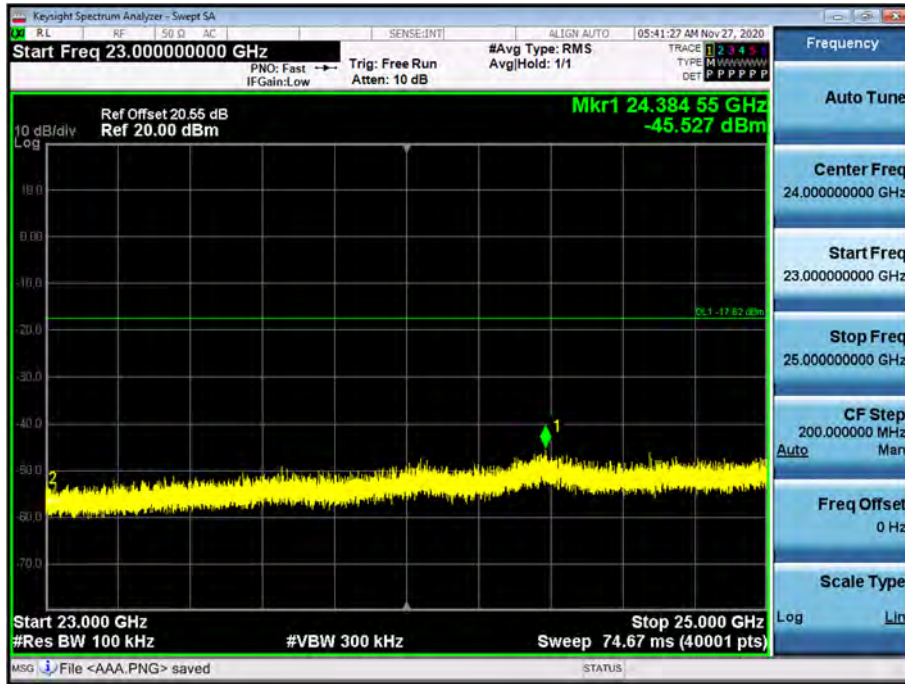

[ANT2]

☐ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

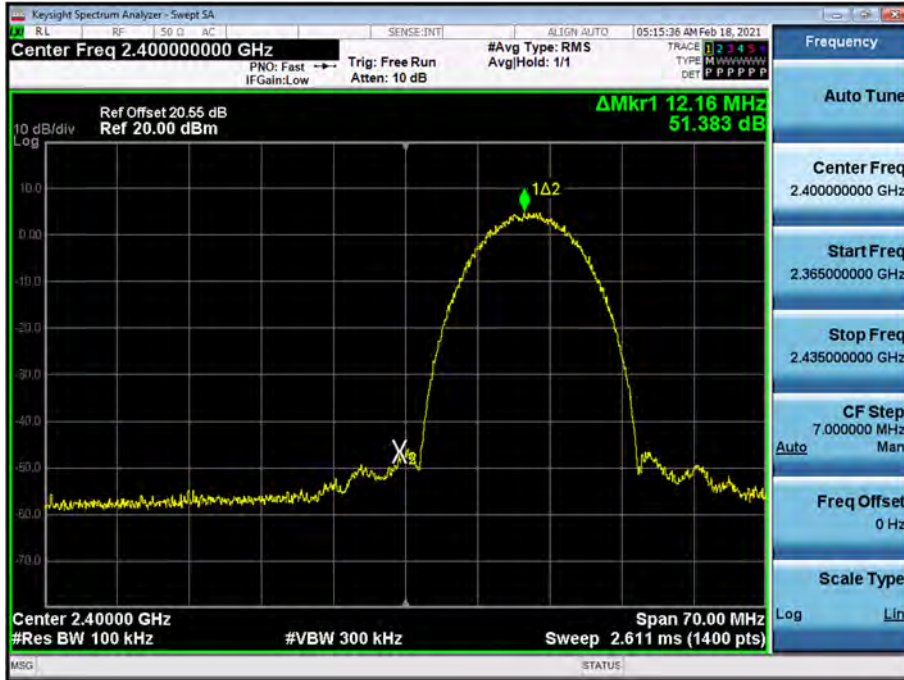

Band Edge (802.11b-CH11)




Band Edge (802.11b-CH12)

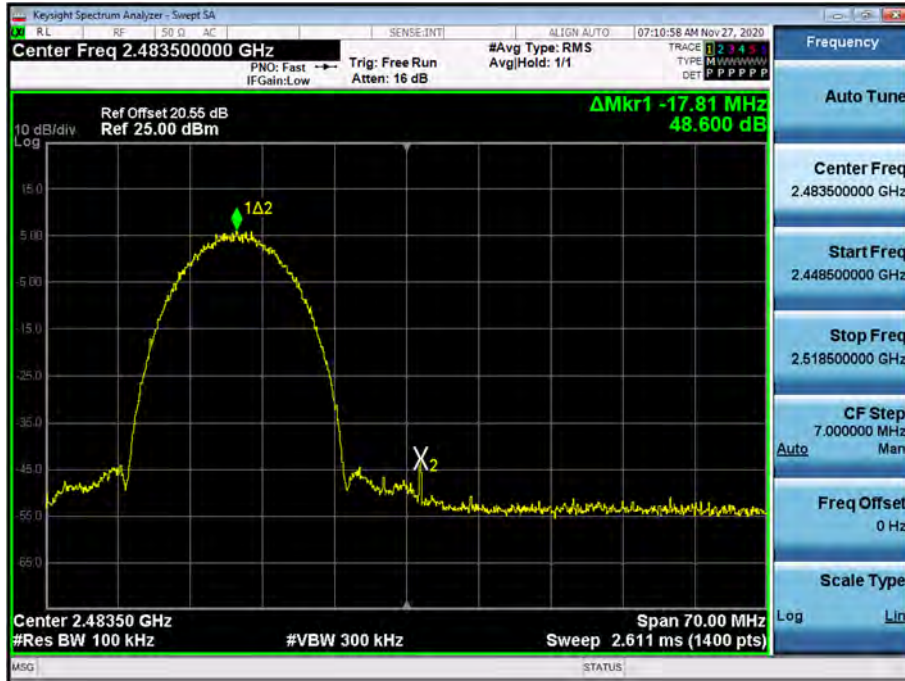

Band Edge (802.11b-CH13)




Band Edge (802.11g-CH1)

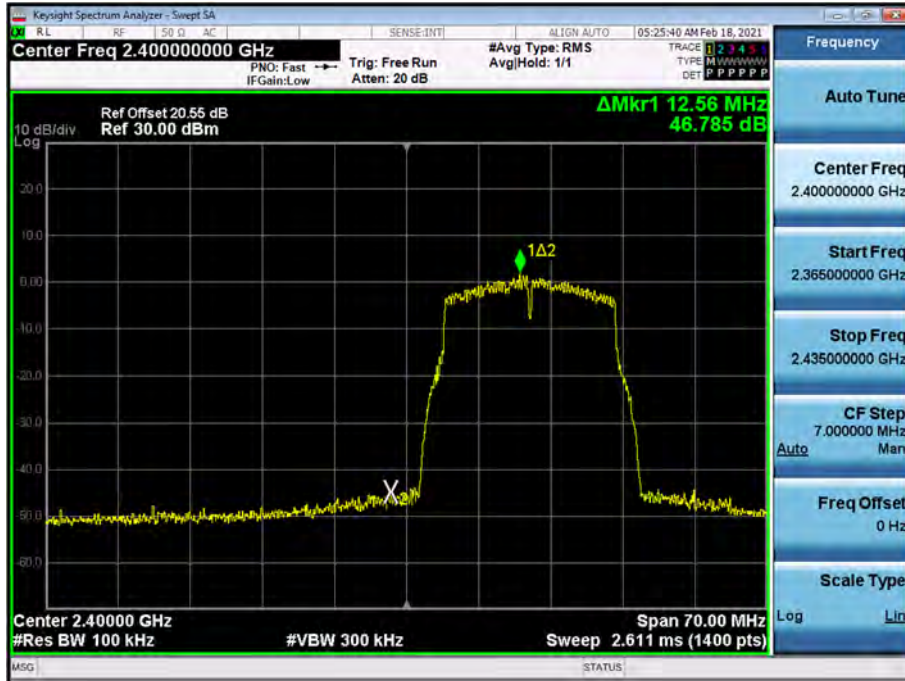


Band Edge (802.11g-CH11)




Band Edge (802.11g-CH12)

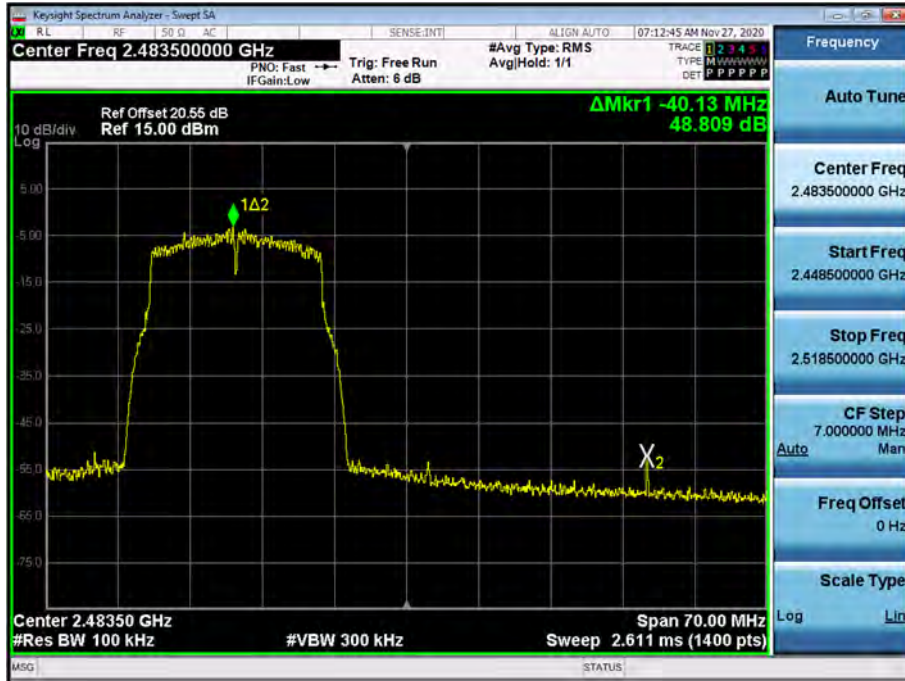

Band Edge (802.11g-CH13)

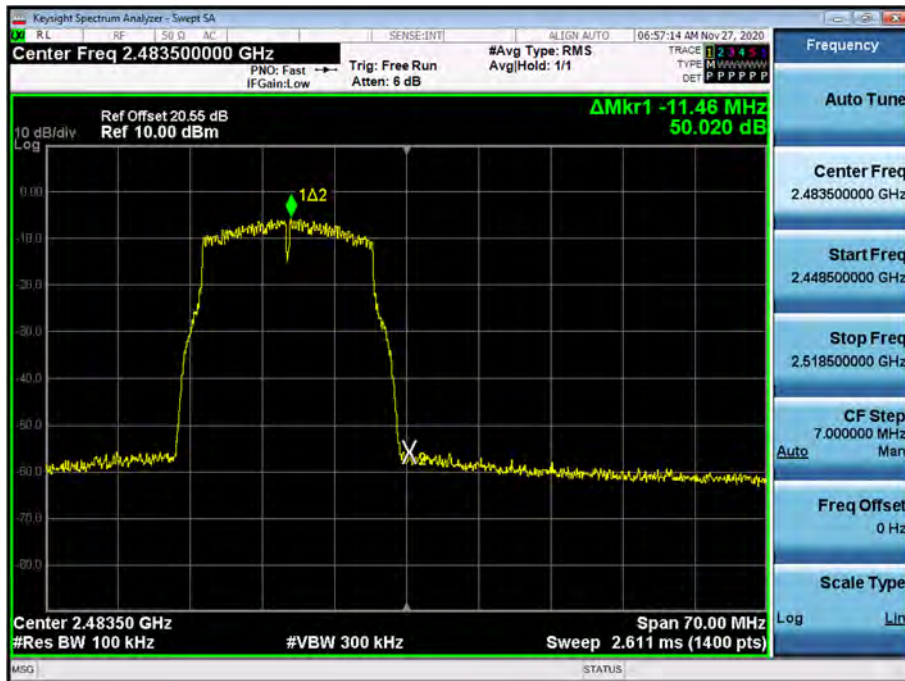

Band Edge (802.11n_HT20 -CH1)

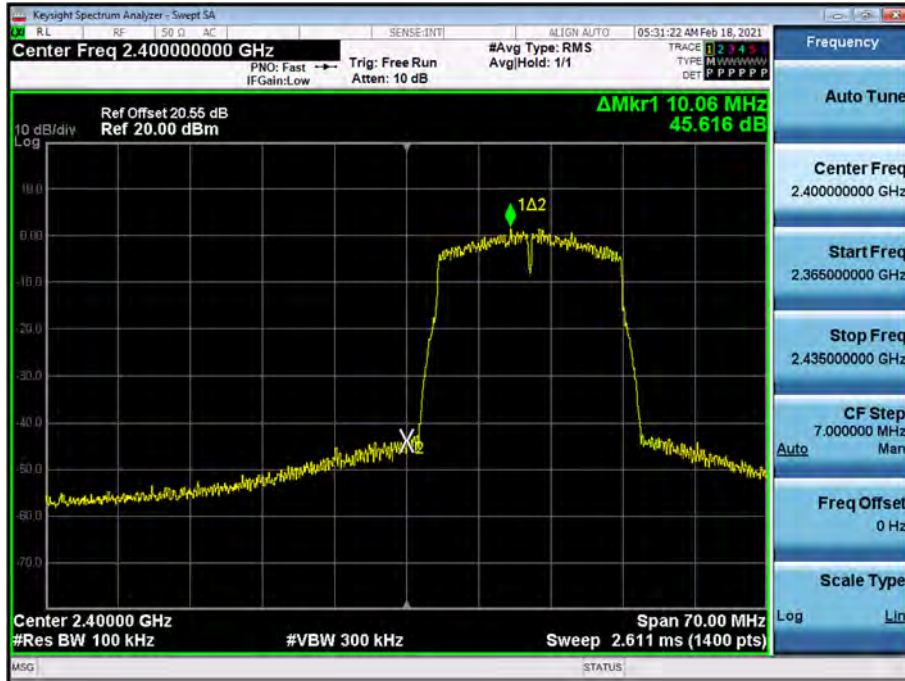


Band Edge (802.11n_HT20 -CH11)




Band Edge (802.11n_HT20 -CH12)



Band Edge (802.11n_HT20 -CH13)

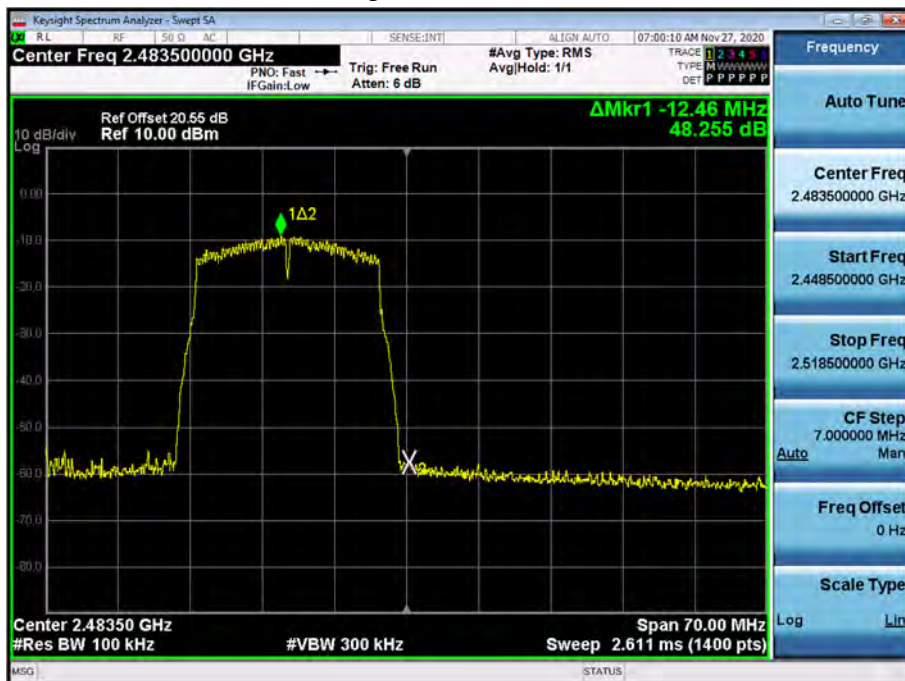

Band Edge (802.11n_HT40 -CH3)

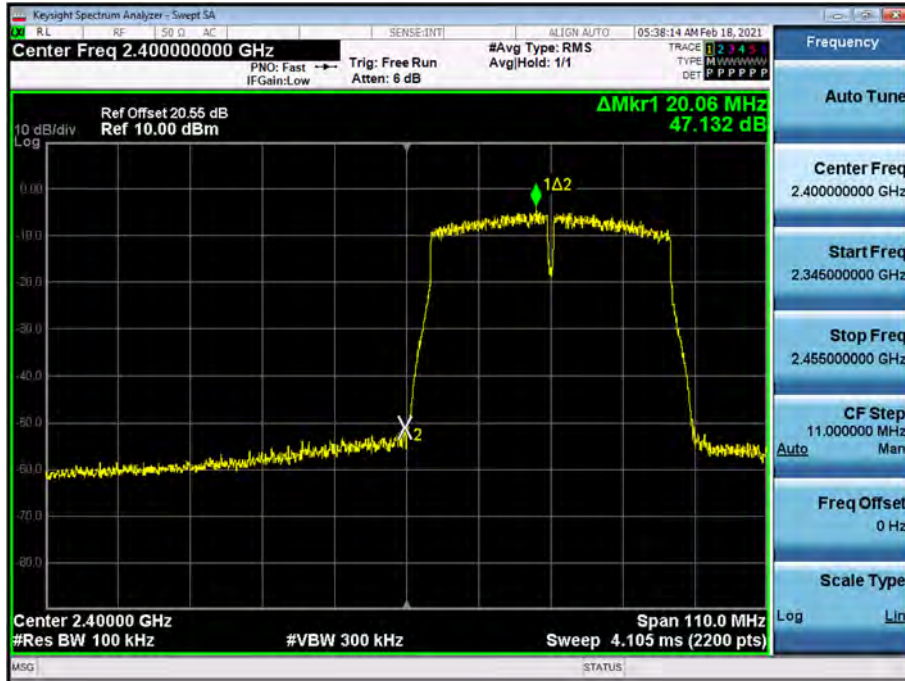


Band Edge (802.11n_HT40 -CH9)



☐ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

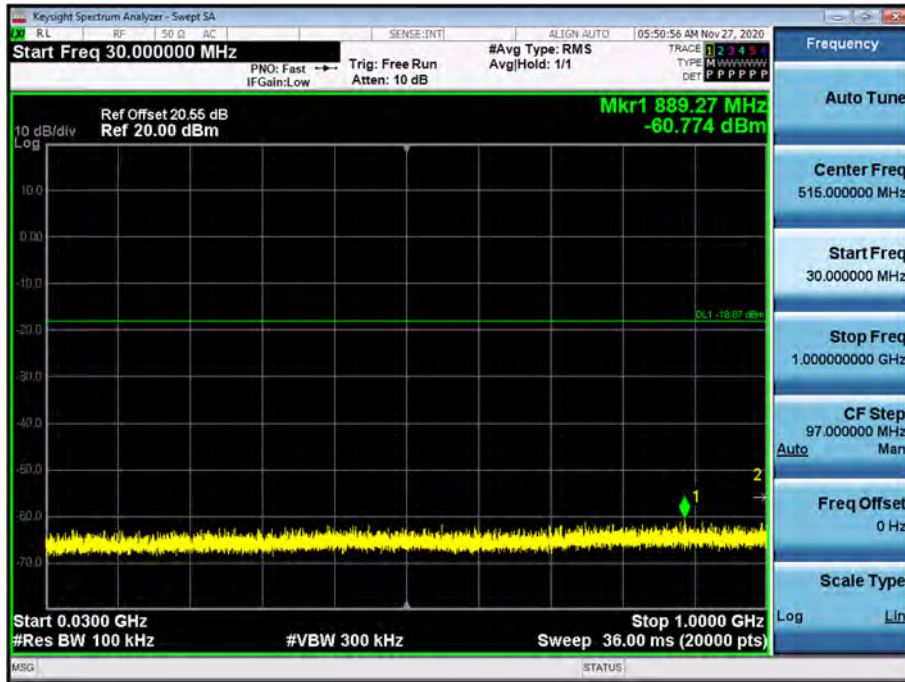


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

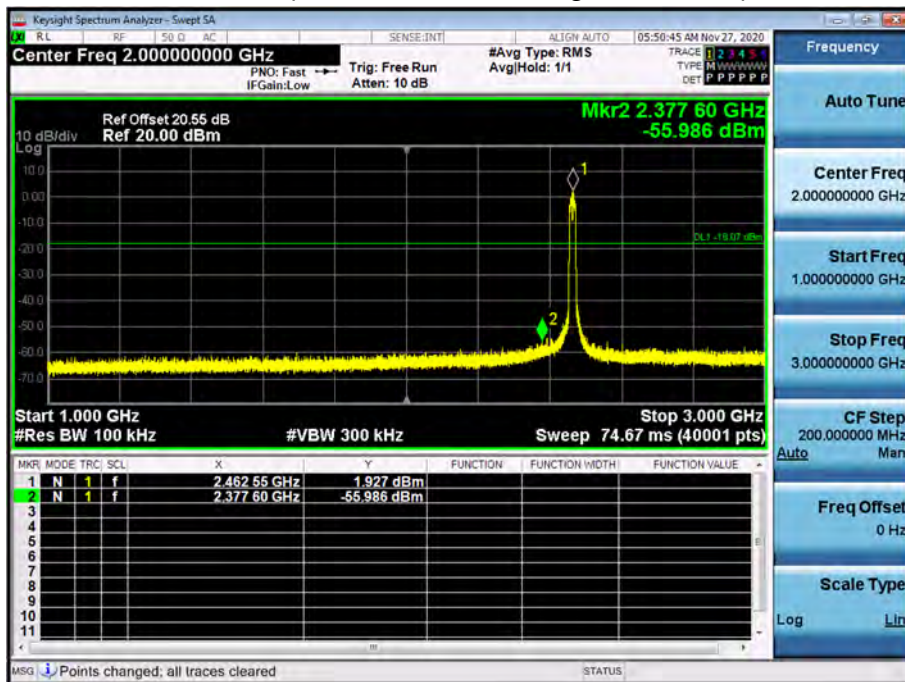


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

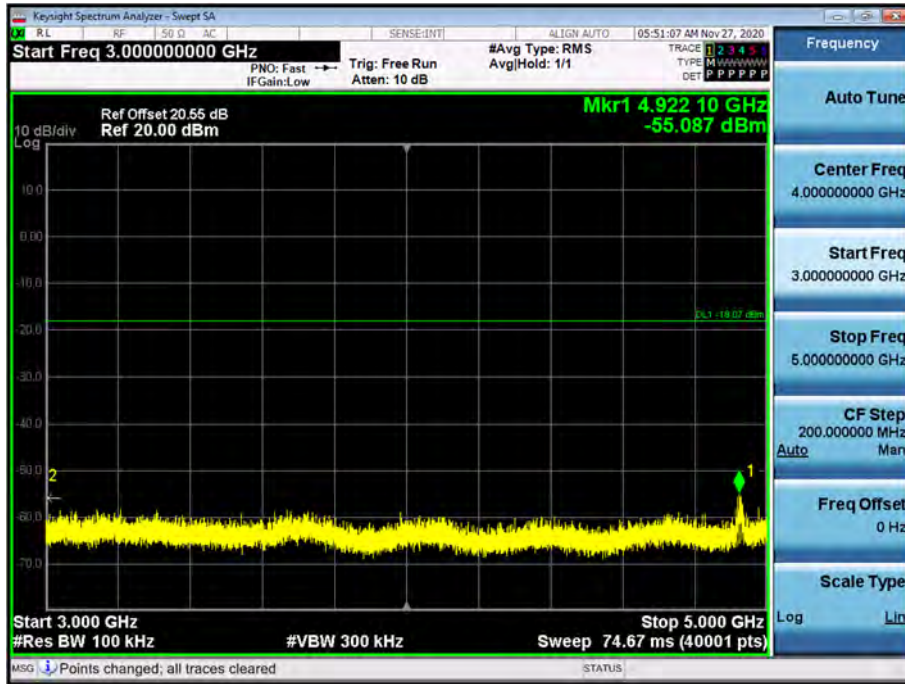


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

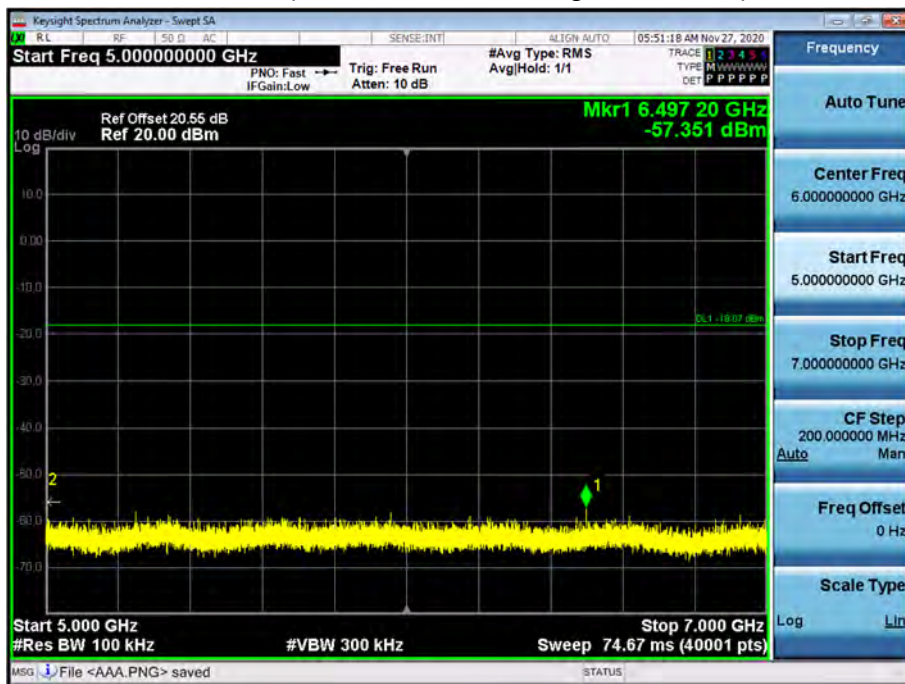


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

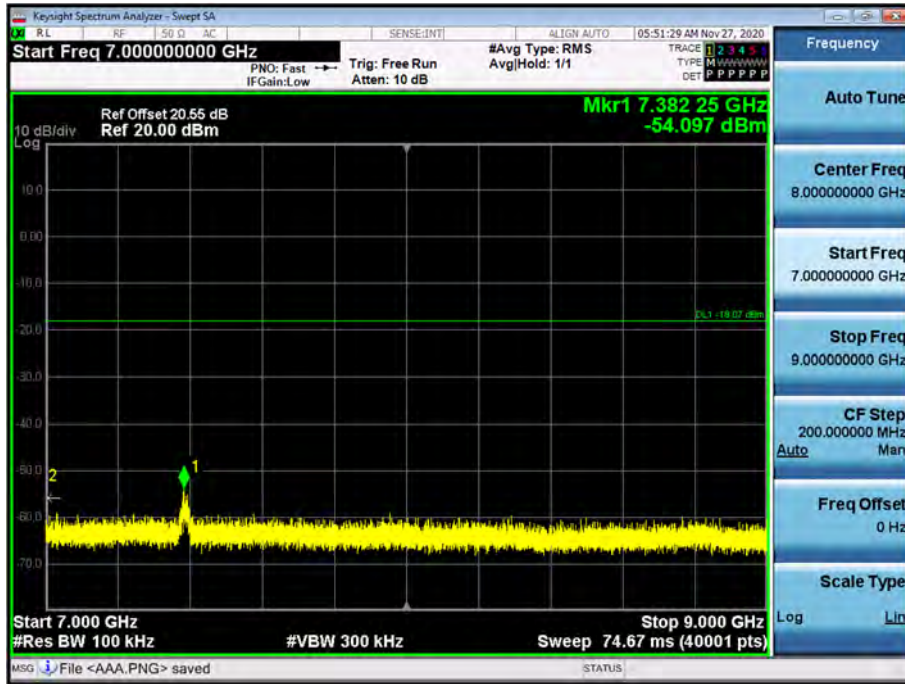


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

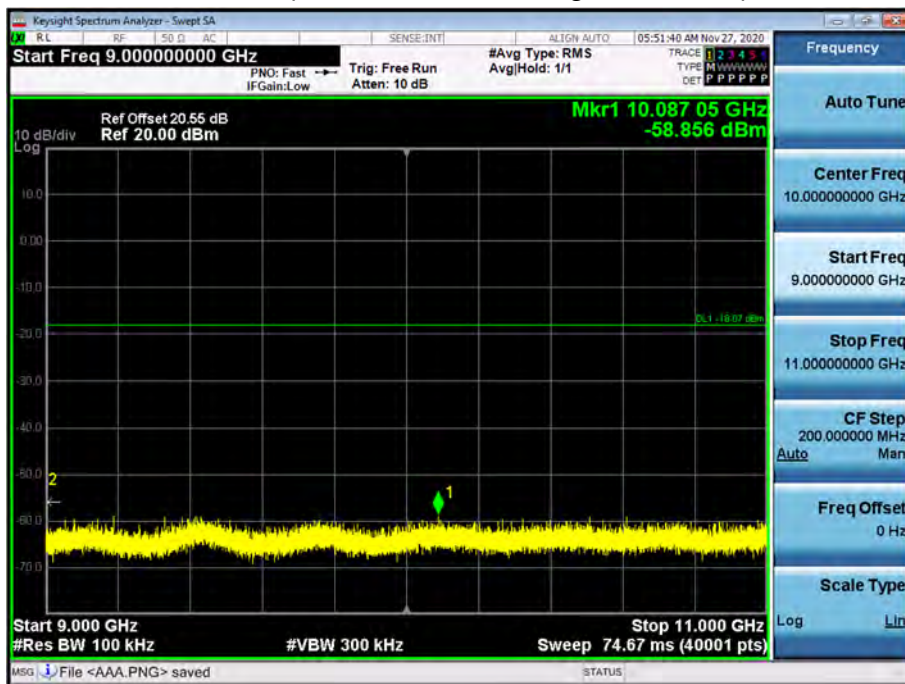


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

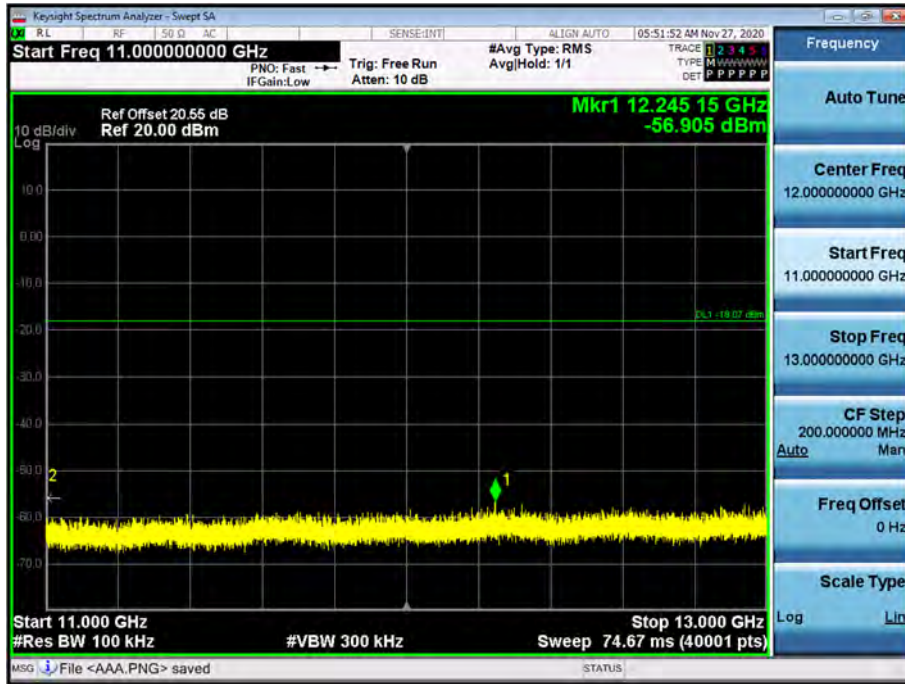


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

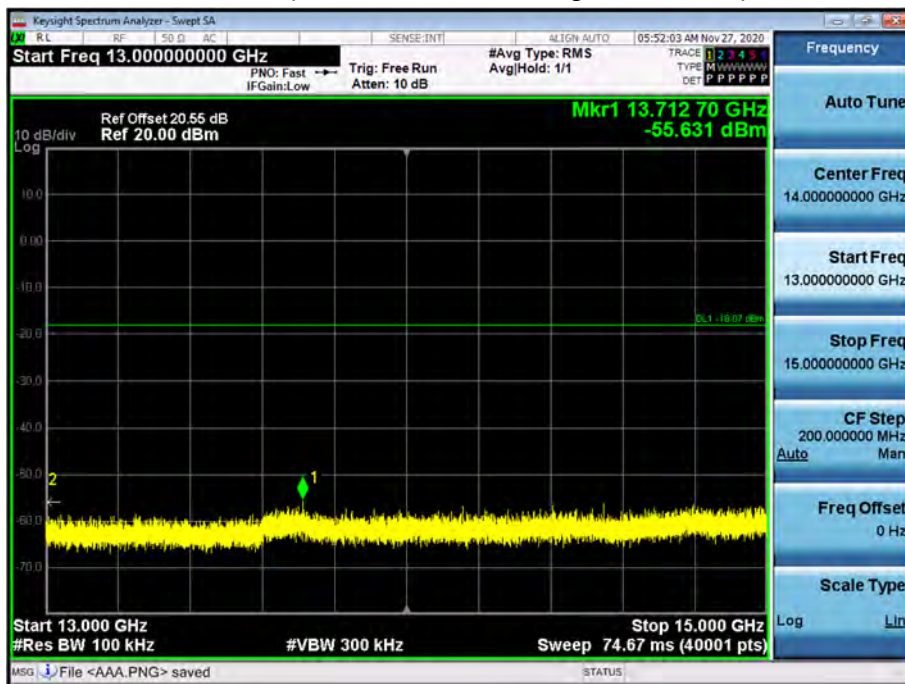


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

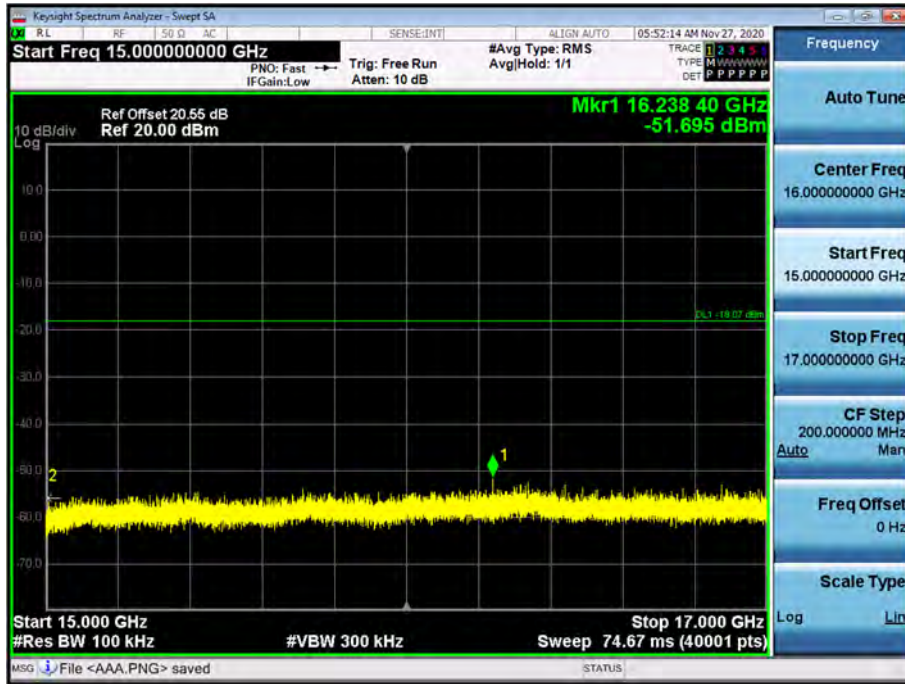


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

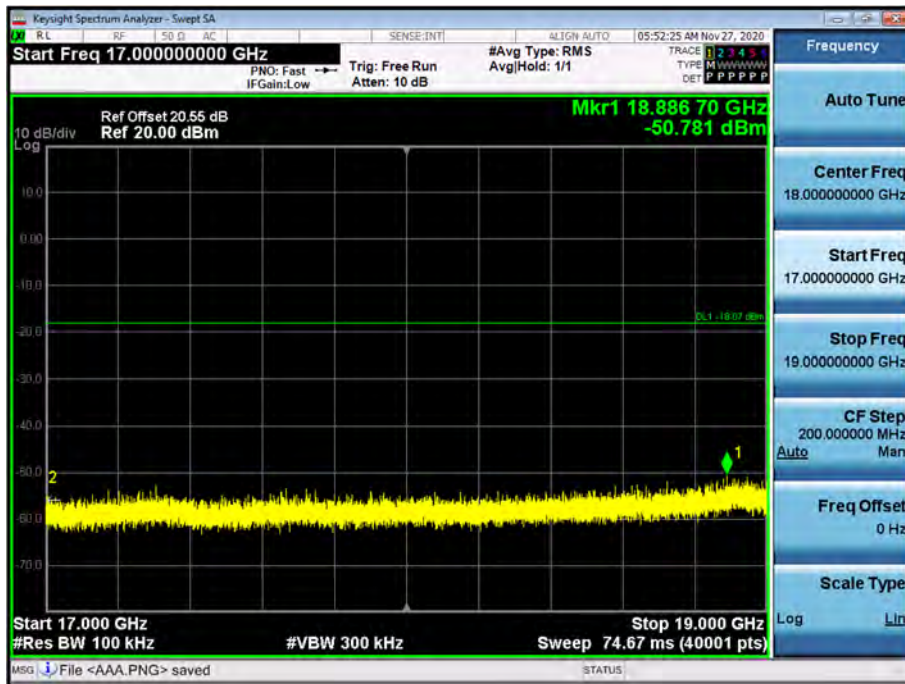


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

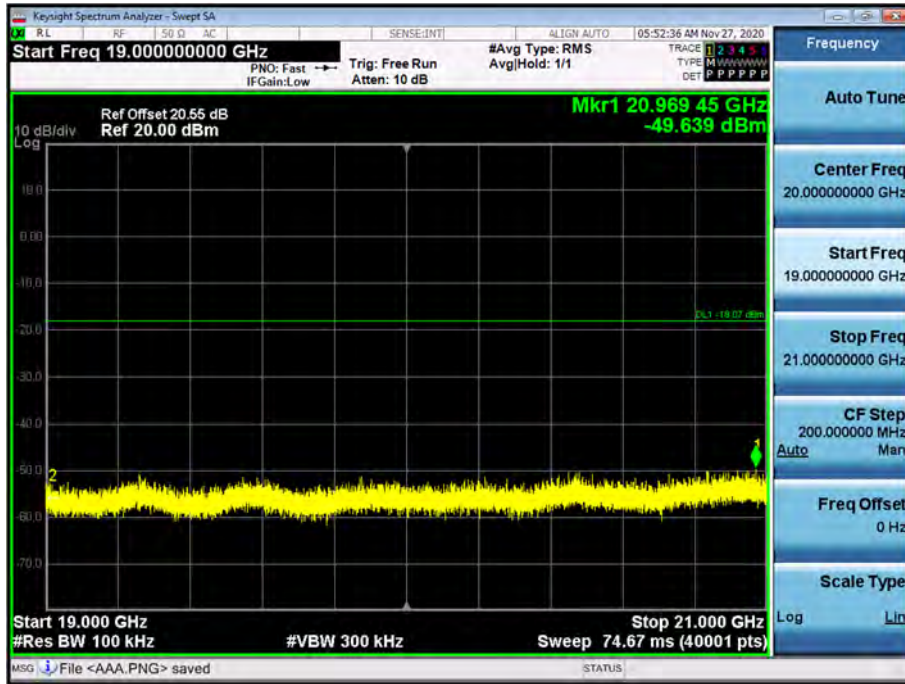


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

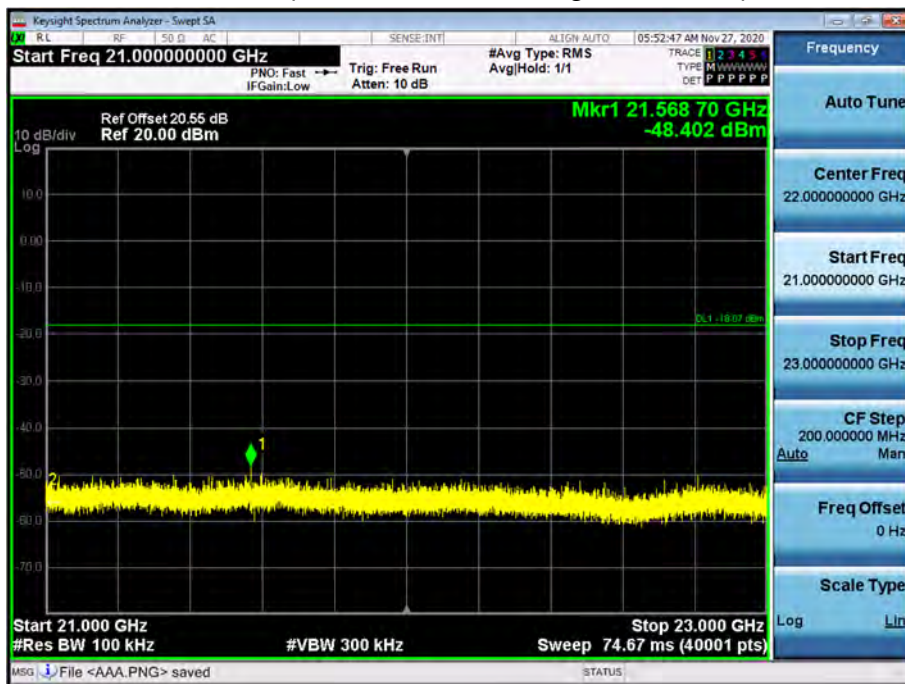

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11g_Ch.11_54 Mbps)

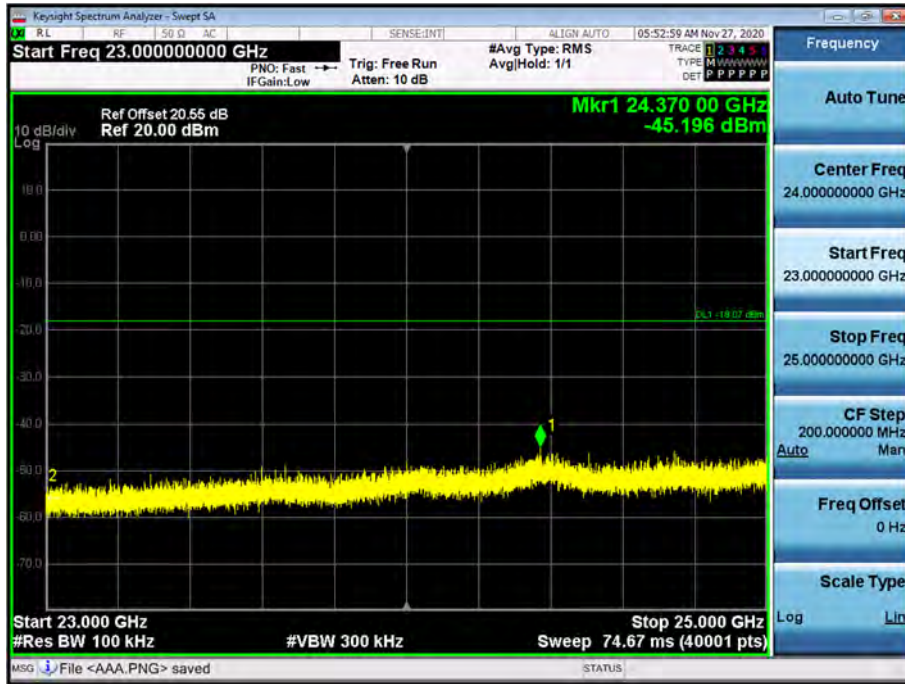

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

[Only MIMO]

Frequency Range : Above 1 GHz

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4824	46.75	3.62	V	50.37	73.98	23.61	PK
4824	41.66	3.62	V	45.28	53.98	8.70	AV
7236	45.75	9.26	V	55.01	73.98	18.97	PK
7236	39.31	9.26	V	48.57	53.98	5.41	AV
4824	47.72	3.62	H	51.34	73.98	22.64	PK
4824	42.82	3.62	H	46.44	53.98	7.54	AV
7236	46.98	9.26	H	56.24	73.98	17.74	PK
7236	40.83	9.26	H	50.09	53.98	3.89	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4824	47.36	0.00	3.62	V	50.98	73.98	23.00	PK
4824	36.17	0.00	3.62	V	39.79	53.98	14.19	AV
7236	50.47	0.00	9.26	V	59.73	73.98	14.25	PK
7236	32.66	0.00	9.26	V	41.92	53.98	12.06	AV
4824	48.13	0.00	3.62	H	51.75	73.98	22.23	PK
4824	37.47	0.00	3.62	H	41.09	53.98	12.89	AV
7236	51.58	0.00	9.26	H	60.84	73.98	13.14	PK
7236	33.86	0.00	9.26	H	43.12	53.98	10.86	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4824	43.29	0.00	3.62	V	46.91	73.98	27.07	PK
4824	31.43	0.00	3.62	V	35.05	53.98	18.93	AV
7236	47.61	0.00	9.26	V	56.87	73.98	17.11	PK
7236	29.58	0.00	9.26	V	38.84	53.98	15.14	AV
4824	44.55	0.00	3.62	H	48.17	73.98	25.81	PK
4824	32.08	0.00	3.62	H	35.70	53.98	18.28	AV
7236	48.72	0.00	9.26	H	57.98	73.98	16.00	PK
7236	30.32	0.00	9.26	H	39.58	53.98	14.40	AV

Operation Mode:	802.11n (HT40)
Transfer MCS Index:	0
Operating Frequency	2422
Channel No.	03 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4844	41.37	0.00	3.74	V	45.11	73.98	28.87	PK
4844	29.41	0.00	3.74	V	33.15	53.98	20.83	AV
7266	38.97	0.00	9.44	V	48.41	73.98	25.57	PK
7266	27.00	0.00	9.44	V	36.44	53.98	17.54	AV
4844	42.24	0.00	3.74	H	45.98	73.98	28.00	PK
4844	30.08	0.00	3.74	H	33.82	53.98	20.16	AV
7266	39.18	0.00	9.44	H	48.62	73.98	25.36	PK
7266	27.04	0.00	9.44	H	36.48	53.98	17.50	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4874	49.14	3.36	V	52.50	73.98	21.48	PK
4874	46.63	3.36	V	49.99	53.98	3.99	AV
7311	45.29	10.27	V	55.56	73.98	18.42	PK
7311	38.69	10.27	V	48.96	53.98	5.02	AV
4874	50.94	3.36	H	54.30	73.98	19.68	PK
4874	47.33	3.36	H	50.69	53.98	3.29	AV
7311	46.16	10.27	H	56.43	73.98	17.55	PK
7311	39.38	10.27	H	49.65	53.98	4.33	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4874	47.75	0.00	3.36	V	51.11	73.98	22.87	PK
4874	34.57	0.00	3.36	V	37.93	53.98	16.05	AV
7311	48.02	0.00	10.27	V	58.29	73.98	15.69	PK
7311	31.28	0.00	10.27	V	41.55	53.98	12.43	AV
4874	48.36	0.00	3.36	H	51.72	73.98	22.26	PK
4874	35.55	0.00	3.36	H	38.91	53.98	15.07	AV
7311	49.10	0.00	10.27	H	59.37	73.98	14.61	PK
7311	32.14	0.00	10.27	H	42.41	53.98	11.57	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4874	44.89	0.00	3.36	V	48.25	73.98	25.73	PK
4874	31.27	0.00	3.36	V	34.63	53.98	19.35	AV
7311	44.34	0.00	10.27	V	54.61	73.98	19.37	PK
7311	28.22	0.00	10.27	V	38.49	53.98	15.49	AV
4874	45.63	0.00	3.36	H	48.99	73.98	24.99	PK
4874	32.09	0.00	3.36	H	35.45	53.98	18.53	AV
7311	44.91	0.00	10.27	H	55.18	73.98	18.80	PK
7311	28.80	0.00	10.27	H	39.07	53.98	14.91	AV

Operation Mode: 802.11n (HT40)
 Transfer MCS Index: 0
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4874	41.09	0.00	3.36	V	44.45	73.98	29.53	PK
4874	29.17	0.00	3.36	V	32.53	53.98	21.45	AV
7311	38.60	0.00	10.27	V	48.87	73.98	25.11	PK
7311	26.27	0.00	10.27	V	36.54	53.98	17.44	AV
4874	41.22	0.00	3.36	H	44.58	73.98	29.40	PK
4874	29.27	0.00	3.36	H	32.63	53.98	21.35	AV
7311	38.78	0.00	10.27	H	49.05	73.98	24.93	PK
7311	26.76	0.00	10.27	H	37.03	53.98	16.95	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4924	50.66	2.80	V	53.46	73.98	20.52	PK
4924	47.24	2.80	V	50.04	53.98	3.94	AV
7386	44.23	11.07	V	55.30	73.98	18.68	PK
7386	37.89	11.07	V	48.96	53.98	5.02	AV
4924	51.52	2.80	H	54.32	73.98	19.66	PK
4924	48.14	2.80	H	50.94	53.98	3.04	AV
7386	45.47	11.07	H	56.54	73.98	17.44	PK
7386	38.59	11.07	H	49.66	53.98	4.32	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4924	48.42	0.00	2.80	V	51.22	73.98	22.76	PK
4924	34.28	0.00	2.80	V	37.08	53.98	16.90	AV
7386	46.51	0.00	11.07	V	57.58	73.98	16.40	PK
7386	30.19	0.00	11.07	V	41.26	53.98	12.72	AV
4924	49.14	0.00	2.80	H	51.94	73.98	22.04	PK
4924	35.33	0.00	2.80	H	38.13	53.98	15.85	AV
7386	46.74	0.00	11.07	H	57.81	73.98	16.17	PK
7386	30.50	0.00	11.07	H	41.57	53.98	12.41	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch


Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4924	44.38	0.00	2.80	V	47.18	73.98	26.80	PK
4924	31.17	0.00	2.80	V	33.97	53.98	20.01	AV
7386	40.31	0.00	11.07	V	51.38	73.98	22.60	PK
7386	27.19	0.00	11.07	V	38.26	53.98	15.72	AV
4924	44.93	0.00	2.80	H	47.73	73.98	26.25	PK
4924	31.59	0.00	2.80	H	34.39	53.98	19.59	AV
7386	40.66	0.00	11.07	H	51.73	73.98	22.25	PK
7386	27.30	0.00	11.07	H	38.37	53.98	15.61	AV

Operation Mode:	802.11n (HT40)
Transfer MCS Index:	0
Operating Frequency	2452
Channel No.	9 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4904	40.69	0.00	3.19	V	43.88	73.98	30.10	PK
4904	28.43	0.00	3.19	V	31.62	53.98	22.36	AV
7356	38.28	0.00	10.51	V	48.79	73.98	25.19	PK
7356	26.71	0.00	10.51	V	37.22	53.98	16.76	AV
4904	40.82	0.00	3.19	H	44.01	73.98	29.97	PK
4904	28.52	0.00	3.19	H	31.71	53.98	22.27	AV
7356	38.99	0.00	10.51	H	49.50	73.98	24.48	PK
7356	26.78	0.00	10.51	H	37.29	53.98	16.69	AV


▣ Test Plots (Worst case : H)

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.11 2nd Harmonic)

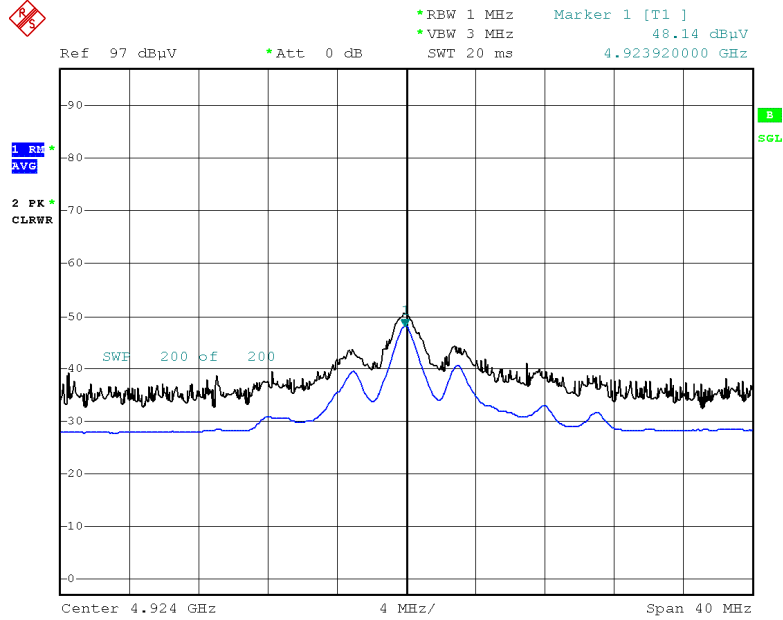

Date: 17.FEB.2021 12:55:48

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.11 2nd Harmonic)

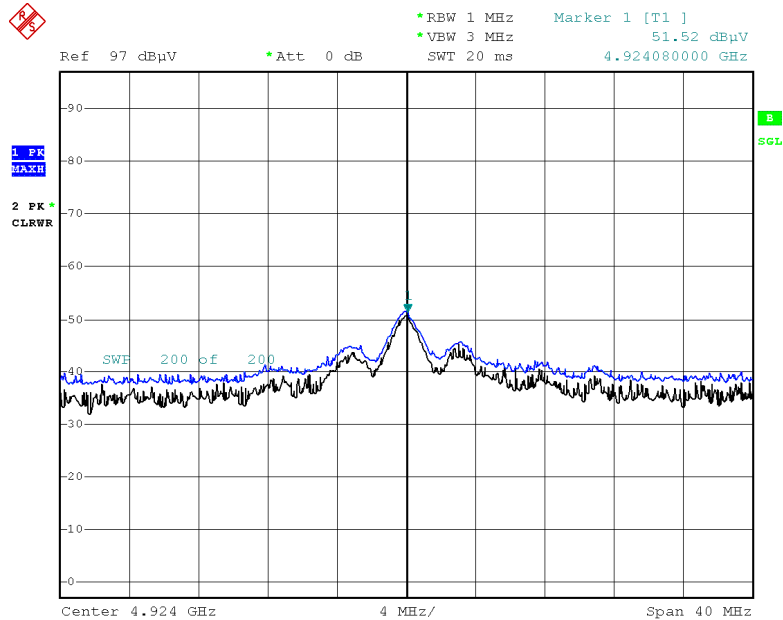

Date: 17.FEB.2021 12:55:59

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Reading	※ A.F.+CL	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
2390.0	50.50	0.94	H	51.44	73.98	22.54	PK
2390.0	40.44	0.94	H	41.38	53.98	12.60	AV
2390.0	49.33	0.94	V	50.27	73.98	23.71	PK
2390.0	39.54	0.94	V	40.48	53.98	13.50	AV
2483.5	53.58	1.20	H	54.78	73.98	19.20	PK
2483.5	47.81	1.20	H	49.01	53.98	4.97	AV
2483.5	52.67	1.20	V	53.87	73.98	20.11	PK
2483.5	46.65	1.20	V	47.85	53.98	6.13	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Frequency	Reading	※ A.F.+CL	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
12 ch / 2483.5	56.17	1.20	H	57.37	73.98	16.61	PK
12 ch / 2483.5	48.17	1.20	H	49.37	53.98	4.61	AV
12 ch / 2483.5	55.33	1.20	V	56.53	73.98	17.45	PK
12 ch / 2483.5	47.69	1.20	V	48.89	53.98	5.09	AV
13 ch / 2483.5	55.45	1.20	H	56.65	73.98	17.33	PK
13 ch / 2483.5	48.39	1.20	H	49.59	53.98	4.39	AV
13 ch / 2483.5	54.19	1.20	V	55.39	73.98	18.59	PK
13 ch / 2483.5	47.66	1.20	V	48.86	53.98	5.12	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency	Reading	Duty Cycle	※ A.F.+CL	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	69.25	0.00	0.94	H	70.19	73.98	3.79	PK
2390.0	49.30	0.00	0.94	H	50.24	53.98	3.74	AV
2390.0	67.91	0.00	0.94	V	68.85	73.98	5.13	PK
2390.0	48.34	0.00	0.94	V	49.28	53.98	4.70	AV
2483.5	63.39	0.00	1.20	H	64.59	73.98	9.39	PK
2483.5	46.77	0.00	1.20	H	47.97	53.98	6.01	AV
2483.5	62.11	0.00	1.20	V	63.31	73.98	10.67	PK
2483.5	45.90	0.00	1.20	V	47.10	53.98	6.88	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No.: 12 Ch, 13 Ch

Frequency	Reading	Duty Cycle	※ A.F.+CL	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
12 ch / 2483.5	65.38	0.00	1.20	H	66.58	73.98	7.40	PK
12 ch / 2483.5	48.43	0.00	1.20	H	49.63	53.98	4.35	AV
12 ch / 2483.5	64.75	0.00	1.20	V	65.95	73.98	8.03	PK
12 ch / 2483.5	47.39	0.00	1.20	V	48.59	53.98	5.39	AV
13 ch / 2483.5	64.49	0.00	1.20	H	65.69	73.98	8.29	PK
13 ch / 2483.5	49.19	0.00	1.20	H	50.39	53.98	3.59	AV
13 ch / 2483.5	64.10	0.00	1.20	V	65.30	73.98	8.68	PK
13 ch / 2483.5	48.28	0.00	1.20	V	49.48	53.98	4.50	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency	Reading	Duty Cycle	※ A.F.+CL	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	64.86	0.00	0.94	H	65.80	73.98	8.18	PK
2390.0	49.07	0.00	0.94	H	50.01	53.98	3.97	AV
2390.0	64.09	0.00	0.94	V	65.03	73.98	8.95	PK
2390.0	48.44	0.00	0.94	V	49.38	53.98	4.60	AV
2483.5	67.85	0.00	1.20	H	69.05	73.98	4.93	PK
2483.5	49.63	0.00	1.20	H	50.83	53.98	3.15	AV
2483.5	67.42	0.00	1.20	V	68.62	73.98	5.36	PK
2483.5	48.23	0.00	1.20	V	49.43	53.98	4.55	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No.: 12 Ch, 13 Ch

Frequency	Reading	Duty Cycle	※ A.F.+CL	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
12 ch / 2483.5	66.42	0.00	1.20	H	67.62	73.98	6.36	PK
12 ch / 2483.5	46.82	0.00	1.20	H	48.02	53.98	5.96	AV
12 ch / 2483.5	65.17	0.00	1.20	V	66.37	73.98	7.61	PK
12 ch / 2483.5	45.28	0.00	1.20	V	46.48	53.98	7.50	AV
13 ch / 2483.5	63.13	0.00	1.20	H	64.33	73.98	9.65	PK
13 ch / 2483.5	48.85	0.00	1.20	H	50.05	53.98	3.93	AV
13 ch / 2483.5	62.84	0.00	1.20	V	64.04	73.98	9.94	PK
13 ch / 2483.5	47.99	0.00	1.20	V	49.19	53.98	4.79	AV

Operation Mode:	802.11n (HT40)
Transfer Rate:	0
Operating Frequency	2422 MHz, 2452 MHz
Channel No.	03 Ch, 09 Ch

Frequency	Reading	Duty Cycle	※ A.F.+CL	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	63.09	0.00	0.94	H	64.03	73.98	9.95	PK
2390.0	48.55	0.00	0.94	H	49.49	53.98	4.49	AV
2390.0	62.47	0.00	0.94	V	63.41	73.98	10.57	PK
2390.0	47.69	0.00	0.94	V	48.63	53.98	5.35	AV
2483.5	62.77	0.00	1.20	H	63.97	73.98	10.01	PK
2483.5	48.46	0.00	1.20	H	49.66	53.98	4.32	AV
2483.5	61.67	0.00	1.20	V	62.87	73.98	11.11	PK
2483.5	47.69	0.00	1.20	V	48.89	53.98	5.09	AV

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

9.9 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

Test Report

Common Information

EUT :	MTVWBE01GLX
Manufacturer :	LG
Test Site:	SHIELD ROOM
Operating Conditions :	2.4G WLAN N
Operator Name:	
Comment:	

Full Spectrum

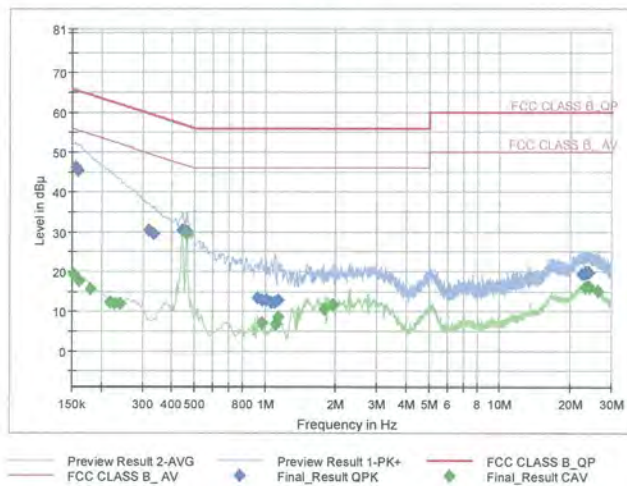

Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBμV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.154500	46.49	65.75	19.26	9.000	N	OFF	9.6
0.159000	45.58	65.52	19.94	9.000	N	OFF	9.6
0.318750	30.48	59.74	29.26	9.000	N	OFF	9.6
0.332250	29.66	59.40	29.74	9.000	N	OFF	9.6
0.442500	30.51	57.02	26.51	9.000	N	OFF	9.6
0.462750	30.18	56.64	26.47	9.000	N	OFF	9.6
0.929750	13.64	56.00	42.36	9.000	N	OFF	9.6
0.968000	12.95	56.00	43.05	9.000	N	OFF	9.6
1.010750	12.83	56.00	43.17	9.000	N	OFF	9.6
1.062500	12.28	56.00	43.72	9.000	N	OFF	9.6
1.098500	12.48	56.00	43.52	9.000	N	OFF	9.6
1.136750	12.79	56.00	43.21	9.000	N	OFF	9.6
22.367750	19.54	60.00	40.46	9.000	N	OFF	10.0
22.777250	19.57	60.00	40.43	9.000	N	OFF	10.0
23.040500	19.71	60.00	40.29	9.000	N	OFF	10.0
23.472500	19.85	60.00	40.15	9.000	N	OFF	10.0
23.540000	19.73	60.00	40.27	9.000	N	OFF	10.0
23.960750	19.95	60.00	40.05	9.000	N	OFF	10.0

Final_Result_CAV

2021-01-07

오후 8:19:11

Test

2 / 2

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.152250	19.43	55.88	36.45	9.000	N	OFF	9.6
0.161250	17.87	55.40	37.53	9.000	N	OFF	9.6
0.179250	15.89	54.52	38.63	9.000	N	OFF	9.6
0.217500	12.22	52.91	40.69	9.000	N	OFF	9.6
0.226500	12.17	52.58	40.41	9.000	N	OFF	9.6
0.240000	12.13	52.10	39.97	9.000	N	OFF	9.6
0.462750	29.59	46.64	17.05	9.000	N	OFF	9.6
0.968000	7.02	46.00	38.98	9.000	N	OFF	9.6
1.107500	6.78	46.00	39.22	9.000	N	OFF	9.6
1.141250	8.55	46.00	37.45	9.000	N	OFF	9.6
1.773500	10.74	46.00	35.26	9.000	N	OFF	9.6
1.946750	11.91	46.00	34.09	9.000	N	OFF	9.6
23.038250	16.18	50.00	33.82	9.000	N	OFF	10.0
23.540000	16.30	50.00	33.70	9.000	N	OFF	10.0
23.911250	16.39	50.00	33.61	9.000	N	OFF	10.0
23.960750	16.40	50.00	33.60	9.000	N	OFF	10.0
24.253250	16.14	50.00	33.86	9.000	N	OFF	10.0
26.084750	15.15	50.00	34.85	9.000	N	OFF	10.0

2021-01-07

오후 8:19:11

Conducted Emissions (Line 2)

2.4G_N


1 / 2

Test Report

Common Information

EUT :	MTWBE01GLX
Manufacturer :	LG
Test Site:	SHIELD ROOM
Operating Conditions :	2.4G WLAN L1
Operator Name:	
Comment:	

Full Spectrum

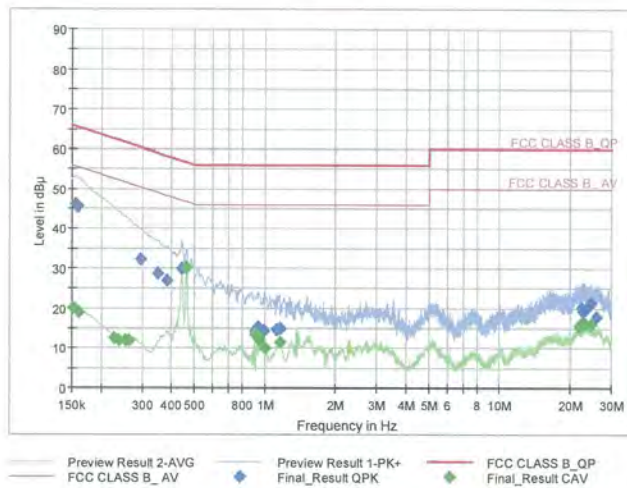

Final Result QPK

Frequency (MHz)	QuasiPea k	Limit (dBuV)	Margi n	Bandwidt h	Line	Filter	Corr. (dB)
0.154500	46.24	65.75	19.51	9.000	L1	OFF	9.6
0.159000	45.67	65.52	19.85	9.000	L1	OFF	9.6
0.296250	32.25	60.35	28.09	9.000	L1	OFF	9.6
0.350250	28.92	58.96	30.03	9.000	L1	OFF	9.6
0.381750	27.22	58.24	31.02	9.000	L1	OFF	9.6
0.442500	29.94	57.02	27.07	9.000	L1	OFF	9.6
0.909500	14.50	56.00	41.50	9.000	L1	OFF	9.6
0.929750	14.98	56.00	41.02	9.000	L1	OFF	9.6
0.941000	15.27	56.00	40.73	9.000	L1	OFF	9.6
0.997250	14.42	56.00	41.58	9.000	L1	OFF	9.6
1.123250	14.63	56.00	41.37	9.000	L1	OFF	9.6
1.161500	15.06	56.00	40.94	9.000	L1	OFF	9.6
22.388000	20.10	60.00	39.90	9.000	L1	OFF	10.0
22.622000	19.43	60.00	40.57	9.000	L1	OFF	10.0
22.856000	19.49	60.00	40.51	9.000	L1	OFF	10.0
23.087750	19.56	60.00	40.44	9.000	L1	OFF	10.0
24.386000	21.34	60.00	38.66	9.000	L1	OFF	10.0
25.918250	16.01	60.00	41.99	9.000	L1	OFF	10.0

Final_Result_CAV

2021-01-07

오후 8:27:37

2.4G_N

2 / 2

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.152250	20.16	55.88	35.72	9.000	L1	OFF	9.6
0.161250	19.02	55.40	36.38	9.000	L1	OFF	9.6
0.226500	12.69	52.58	39.89	9.000	L1	OFF	9.6
0.237750	12.24	52.17	39.93	9.000	L1	OFF	9.6
0.253500	12.01	51.64	39.63	9.000	L1	OFF	9.6
0.262500	12.10	51.35	39.25	9.000	L1	OFF	9.6
0.462750	30.18	46.64	16.46	9.000	L1	OFF	9.6
0.905000	13.52	46.00	32.48	9.000	L1	OFF	9.6
0.925250	13.19	46.00	32.81	9.000	L1	OFF	9.6
0.945500	12.06	46.00	33.94	9.000	L1	OFF	9.6
0.999500	10.09	46.00	35.91	9.000	L1	OFF	9.6
1.159250	11.43	46.00	34.57	9.000	L1	OFF	9.6
21.920000	15.68	50.00	34.32	9.000	L1	OFF	10.0
22.388000	16.22	50.00	33.78	9.000	L1	OFF	10.0
22.820000	16.23	50.00	33.77	9.000	L1	OFF	10.0
22.853750	16.16	50.00	33.84	9.000	L1	OFF	10.0
23.254250	16.16	50.00	33.84	9.000	L1	OFF	10.0
24.383750	15.79	50.00	34.21	9.000	L1	OFF	10.0

2021-01-07

오후 8:27:37

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/05/2020	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/18/2020	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Agilent	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/25/2020	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
Weinschel	2-20 / Attenuator(20 dB)	10/07/2020	Annual	BR0592
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/12/2020	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/19/2020	Biennial	9160-3368
Schwarzbeck	VULB 9168 / Hybrid Antenna	09/04/2020	Biennial	9168-0895
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/14/2020	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/22/2020	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/08/2021	Annual	1
CERNEX	CBLU1183540B-01/Broadband Bench Top LNA	12/23/2020	Annual	N/A
WEINSCHEL	56-10 / Attenuator(10 dB)			
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	12/23/2020	Annual	N/A
Api tech.	18B-03 / Attenuator (3 dB)			
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/23/2020	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2103-FI007-P