



# TEST REPORT

FCC/ISED UNII Test for MTVWBE01GLX  
Certification

**APPLICANT**  
LG Electronics Inc.

**REPORT NO.**  
HCT-RF-2103-FI008

**DATE OF ISSUE**  
March 15, 2021

**Tested by**  
Jin Gwan Lee

**Technical Manager**  
Jong Seok Lee

Accredited by KOLAS, Republic of KOREA

**HCT CO., LTD.**

*Soo Chan Lee*  
SooChan Lee / CEO



# TEST REPORT

FCC/ISED UNII Test  
for MTVWBE01GLX

REPORT NO.  
HCT-RF-2103-FI008

DATE OF ISSUE  
March 15, 2021

Additional Model  
-

Applicant **LG Electronics Inc.**  
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Eut Type RF Module  
Model Name MTVWBE01GLX

FCC ID BEJMTWBE01GLX  
IC 2703H-MTVWBE01GLX

Modulation type OFDM

FCC Classification Unlicensed National Information Infrastructure(NII)

FCC Rule Part(s) Part 15.407

ISED Rule Part(s) RSS-247 Issue 2 (February 2017)  
RSS-Gen Issue 5\_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.



## REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue  | Description     |
|--------------|----------------|-----------------|
| 0            | March 15, 2021 | Initial Release |

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 AND KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.



## CONTENTS

|                                      |     |
|--------------------------------------|-----|
| 1. GENERAL INFORMATION               | 5   |
| EUT DESCRIPTION                      | 5   |
| ANTENNA CONFIGURATIONS               | 6   |
| 2. MAXIMUM OUTPUT POWER              | 7   |
| 3. TEST METHODOLOGY                  | 8   |
| EUT CONFIGURATION                    | 8   |
| EUT EXERCISE                         | 8   |
| GENERAL TEST PROCEDURES              | 8   |
| DESCRIPTION OF TEST MODES            | 9   |
| 4. INSTRUMENT CALIBRATION            | 9   |
| 5. FACILITIES AND ACCREDITATIONS     | 9   |
| 5.1 FACILITIES                       | 9   |
| 5.2 EQUIPMENT                        | 9   |
| 6. ANTENNA REQUIREMENTS              | 10  |
| 7. MEASUREMENT UNCERTAINTY           | 10  |
| 8. DESCRIPTION OF TESTS              | 11  |
| 9. SUMMARY OF TEST RESULTS           | 35  |
| 10. TEST RESULT                      | 37  |
| 10.1 26DB BANDWIDTH & 99 % BANDWIDTH | 37  |
| 10.2 6DB BANDWIDTH                   | 55  |
| 10.3 OUTPUT POWER MEASUREMENT        | 79  |
| 10.4 POWER SPECTRAL DENSITY          | 100 |
| 10.5 FREQUENCY STABILITY.            | 129 |
| 10.5.1 80MHz BW                      | 129 |
| 10.6 STRADDLE CHANNEL                | 161 |
| 10.6.1 26dB Bandwidth                | 161 |
| 10.6.2 6dB Bandwidth                 | 167 |
| 10.6.3 Output Power                  | 173 |
| 10.6.4 Power Spectral Density        | 179 |
| 10.7 RADIATED SPURIOUS EMISSIONS     | 187 |
| 10.8 RADIATED RESTRICTED BAND EDGE   | 202 |
| 10.9 RECEIVER SPURIOUS EMISSIONS     | 218 |
| 10.10 POWERLINE CONDUCTED EMISSIONS  | 219 |
| 11. LIST OF TEST EQUIPMENT           | 223 |
| 12. ANNEX A_ TEST SETUP PHOTO        | 225 |



## 1. GENERAL INFORMATION

### EUT DESCRIPTION

|   |  |  |
|---|--|--|
| Model   | MTVWBE01GLX  |  |
| Additional Model                              | -  |  |
| EUT Type                                      | RF Module  |  |
| Power Supply                                  | DC 3.30 V  |  |
| Modulation Type                               | OFDM : 802.11a, 802.11n, 802.11ac  |  |
| Frequency Range (MHz)                         | U-NII-1  | 20MHz BW : 5180 - 5240<br>40MHz BW : 5190 - 5230<br>80MHz BW : 5210        |
|   | U-NII-2A   | 20MHz BW : 5260 - 5320<br>40MHz BW : 5270 - 5310<br>80MHz BW : 5290        |
|   | U-NII-2C   | 20MHz BW : 5500 - 5720<br>40MHz BW : 5510 - 5710<br>80MHz BW : 5530 - 5690 |
|   | U-NII-3  | 20MHz BW : 5745 - 5825<br>40MHz BW : 5755 - 5795<br>80MHz BW : 5775        |
| Antenna type                                  | PIFA (Planar Inverted F Antenna)   |  |
| Antenna Peak Gain                             | Ant.1: 1.26 dBi(UNII 1), 2.92 dBi(UNII 2A)/ 3.29 dBi(UNII 2C)/ 1.48 dBi(UNII 3)<br>Ant.2: 1.83 dBi(UNII 1), 1.83 dBi(UNII 2A)/ 1.84 dBi(UNII 2C)/ 1.68 dBi(UNII 3) |  |
| Straddle channel                              | Supported  |  |
| TDWR Band                                     | Not Supported  |  |
| Dynamic Frequency Selection                   | Slave without radar detection  |  |
| Date(s) of Tests                              | February 19, 2021 ~ March 15, 2021   |  |
| PMN (Product Marketing Number)                | RF Module  |  |
| HVIN (Hardware Version Identification Number) | MTVWBE01GLX  |  |
| FVIN (Firmware Version Identification Number) | ver 1.0  |  |
| HMN (Host Marketing Name)                     | N/A  |  |
| EUT serial numbers                            | Radiated : MTVWBE01GLX-1<br>Conducted : MTVWBE01GLX-2  |  |
| Manufacturer                                  | Markone-Technology<br>A 2401, 606, Seobusaet-gil, Geumcheon-gu, Seoul, Korea, 08504  |  |



## ANTENNA CONFIGURATIONS

### 1. The device employs MIMO technology. Below are the possible configurations

| Configurations  | SISO |      | SDM         | CDD         |
|-----------------|------|------|-------------|-------------|
|                 | Ant1 | Ant2 | Ant1 + Ant2 | Ant1 + Ant2 |
| 802.11a         | O    | O    | X           | O           |
| 802.11n(HT20)   | O    | O    | O           | O           |
| 802.11n(HT40)   | O    | O    | O           | O           |
| 802.11ac(VHT20) | O    | O    | O           | O           |
| 802.11ac(VHT40) | O    | O    | O           | O           |
| 802.11ac(VHT80) | O    | O    | O           | O           |

**Note:**

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

### 2. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N] \text{ dBi}$$

| Band    | Ant Gain (dBi) |            | Directional Gain<br>= $10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi |
|---------|----------------|------------|---|
|         | Ant1(Aux)      | Ant2(Main) |   |
| UNII 1  | Ant1(Aux)      | 1.26       | 4.56  |
|         | Ant2(Main)     | 1.83       |   |
| UNII 2A | Ant1(Aux)      | 2.92       | 5.40  |
|         | Ant2(Main)     | 1.83       |   |
| UNII 2C | Ant1(Aux)      | 3.29       | 5.61  |
|         | Ant2(Main)     | 1.84       |   |
| UNII 3  | Ant1(Aux)      | 1.48       | 4.59  |
|         | Ant2(Main)     | 1.68       |   |



## 2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

| Band   | Mode             | SISO       |       |            |       | MIMO                |       |
|--------|------------------|------------|-------|------------|-------|---------------------|-------|
|        |                  | Ant1 Power |       | Ant2 Power |       | Ant 1 + Ant 2 Power |       |
|        |                  | (dBm)      | (W)   | (dBm)      | (W)   | (dBm)               | (W)   |
| UNII1  | 802.11a          | 12.00      | 0.016 | 10.77      | 0.012 | 14.44               | 0.028 |
|        | 802.11n (HT20)   | 12.74      | 0.019 | 10.42      | 0.011 | 14.74               | 0.030 |
|        | 802.11n (HT40)   | 15.27      | 0.034 | 13.88      | 0.024 | 17.64               | 0.058 |
|        | 802.11ac (VHT20) | 11.93      | 0.016 | 10.66      | 0.012 | 14.35               | 0.027 |
|        | 802.11ac (VHT40) | 15.51      | 0.036 | 14.05      | 0.025 | 17.85               | 0.061 |
|        | 802.11ac (VHT80) | 8.38       | 0.007 | 6.11       | 0.004 | 10.40               | 0.011 |
| UNII2A | 802.11a          | 15.68      | 0.037 | 13.68      | 0.023 | 17.81               | 0.060 |
|        | 802.11n (HT20)   | 16.21      | 0.042 | 14.77      | 0.030 | 18.56               | 0.072 |
|        | 802.11n (HT40)   | 15.12      | 0.033 | 13.12      | 0.020 | 17.24               | 0.053 |
|        | 802.11ac (VHT20) | 15.25      | 0.033 | 13.34      | 0.022 | 17.41               | 0.055 |
|        | 802.11ac (VHT40) | 14.93      | 0.031 | 12.73      | 0.019 | 16.98               | 0.050 |
|        | 802.11ac (VHT80) | 9.28       | 0.008 | 7.60       | 0.006 | 11.53               | 0.014 |
| UNII2C | 802.11a          | 14.50      | 0.028 | 13.31      | 0.021 | 16.95               | 0.050 |
|        | 802.11n (HT20)   | 15.73      | 0.037 | 14.63      | 0.029 | 18.22               | 0.066 |
|        | 802.11n (HT40)   | 15.34      | 0.034 | 13.10      | 0.020 | 17.37               | 0.055 |
|        | 802.11ac (VHT20) | 15.70      | 0.037 | 14.08      | 0.026 | 17.97               | 0.063 |
|        | 802.11ac (VHT40) | 15.53      | 0.036 | 13.40      | 0.022 | 17.61               | 0.058 |
|        | 802.11ac (VHT80) | 15.62      | 0.036 | 16.08      | 0.041 | 18.87               | 0.077 |
| UNII3  | 802.11a          | 17.64      | 0.058 | 15.08      | 0.032 | 19.56               | 0.090 |
|        | 802.11n (HT20)   | 17.58      | 0.057 | 15.85      | 0.038 | 19.81               | 0.096 |
|        | 802.11n (HT40)   | 18.99      | 0.079 | 16.67      | 0.046 | 20.99               | 0.126 |
|        | 802.11ac (VHT20) | 17.38      | 0.055 | 15.68      | 0.037 | 19.62               | 0.092 |
|        | 802.11ac (VHT40) | 18.99      | 0.079 | 16.98      | 0.050 | 21.11               | 0.129 |
|        | 802.11ac (VHT80) | 19.06      | 0.081 | 17.14      | 0.052 | 21.22               | 0.132 |

### 3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

#### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E. / RSS-Gen issue 5, RSS-247 issue 2.

#### GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)



## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032 ).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

**According to FCC 47 CFR § 15.203, § 15.407 / RSS-Gen (Issue 5) Section 8:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance

| Parameter                                | Expanded Uncertainty ( $\pm$ dB) |
|--|----------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.82                             |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 3.40                             |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 4.80                             |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.70                             |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.05                             |

## 8. DESCRIPTION OF TESTS

### 8.1. Duty Cycle

#### Test Configuration

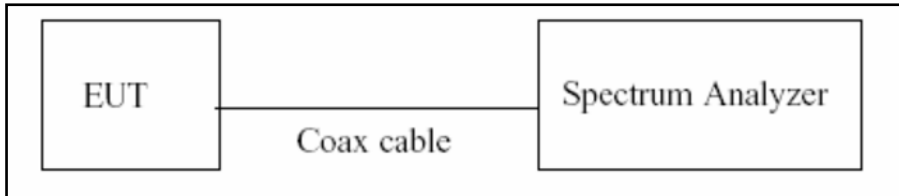

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 8.2. 6dB Bandwidth & 26dB Bandwidth & 99 % Bandwidth

### Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Configuration

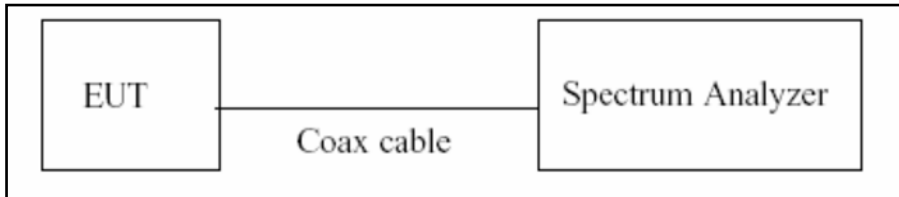

### Test Procedure(26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

### Test Procedure (6dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW  $\geq$  3 x RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.

#### **Test Procedure (99 % Bandwidth for ISED)**

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\cong$  3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.


### 8.3. Output Power Measurement

**Limit**


| Band        | Limit  |
|-------------|--|
| UNII 1      | - Master : Not exceed 1 W(=30dBm)<br>- Slave : Not exceed 250 mW(=23.98 dBm)   |
| UNII 2A, 2C | Not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ ,<br>(where B is the 26 dB emission bandwidth in megahertz.) |
| UNII 3      | Not exceed 1 W(=30dBm)   |

**Test Configuration**

Power Meter

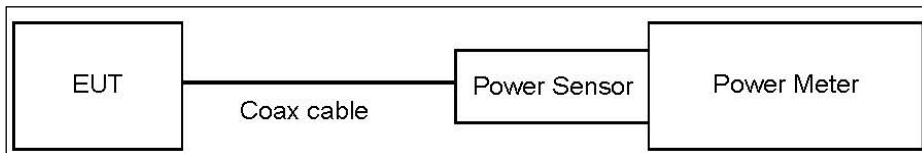

Spectrum Analyzer(Only Straddle Channel)

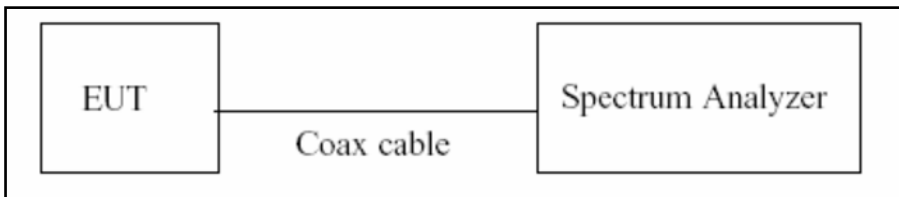

**Test Procedure(Power Meter)**

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

**Test Procedure(Spectrum Analyzer)**

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.



We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW  $\geq$  3 MHz.
5. Number of points in sweep  $\geq$  2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to “free run”.
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add  $10\log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

**Sample Calculation**

Total Power(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

**Note**

1. Spectrum reading values are not plot data.  
The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss(20 dB) + Cable loss
3. Actual value of loss for the attenuator and cable combination is below table.

| Band    | Loss(dB) |
|---------|----------|
| UNII 1  | 20.87    |
| UNII 2A | 20.87    |
| UNII 2C | 20.87    |
| UNII 3  | 20.87    |

(Actual value of loss for the attenuator and cable combination)



**Limit & Ant Gain Calculation (FCC)**

| Operating Mode | Band    | Mode                                    | Operating Ant.           | Ant. Gain (dBi) | Conducted Limit (dBm) |
|----------------|---------|---|--------------------------|-----------------|-----------------------|
| SISO           | UNII 1  | 802.11a/<br>802.11n20/<br>802.11ac20    | Ant 1(Aux)               | 1.26            | 23.98                 |
|                |         |   | Ant 2(Main)              | 1.83            | 23.98                 |
|                | UNII 2A |   | Ant 1(Aux)               | 2.92            | 23.94                 |
|                |         |   | Ant 2(Main)              | 1.83            | 23.96                 |
|                | UNII 2C |   | Ant 1(Aux)               | 3.29            | 23.94                 |
|                |         |   | Ant 2(Main)              | 1.84            | 23.95                 |
|                | UNII 3  |   | Ant 1(Aux)               | 1.48            | 30.00                 |
|                |         |   | Ant 2(Main)              | 1.68            | 30.00                 |
| MIMO           | UNII 1  | 802.11a/<br>802.11n20/<br>802.11ac20    | Ant 1(Aux) & Ant 2(Main) | 4.56            | 23.98                 |
|                | UNII 2A |   |                          | 5.40            | 23.94                 |
|                | UNII 2C |   |                          | 5.61            | 23.94                 |
|                | UNII 3  |   |                          | 4.59            | 30.00                 |
| SISO           | UNII 1  | 802.11n40/<br>802.11ac40/<br>802.11ac80 | Ant 1(Aux)               | 1.26            | 23.98                 |
|                |         |   | Ant 2(Main)              | 1.83            | 23.98                 |
|                | UNII 2A |   | Ant 1(Aux)               | 2.92            | 23.98                 |
|                |         |   | Ant 2(Main)              | 1.83            | 23.98                 |
|                | UNII 2C |   | Ant 1(Aux)               | 3.29            | 23.98                 |
|                |         |   | Ant 2(Main)              | 1.84            | 23.98                 |
|                | UNII 3  |   | Ant 1(Aux)               | 1.48            | 30.00                 |
|                |         |   | Ant 2(Main)              | 1.68            | 30.00                 |
| MIMO           | UNII 1  | 802.11n40/<br>802.11ac40/<br>802.11ac80 | Ant 1(Aux) & Ant 2(Main) | 4.56            | 23.98                 |
|                | UNII 2A |   |                          | 5.40            | 23.98                 |
|                | UNII 2C |   |                          | 5.61            | 23.98                 |
|                | UNII 3  |   |                          | 4.59            | 30.00                 |





**Limit & Ant Gain Calculation (ISED)**


| Operating Mode | Band    | Mode                                    | Operating Ant.              | Ant. Gain (dBi) | E.I.R.P Limit (dBm) | Conducted Limit (dBm) |
|----------------|---------|---|-----------------------------|-----------------|---------------------|-----------------------|
| SISO           | UNII 1  | 802.11a/<br>802.11n20/<br>802.11ac20    | Ant 1(Aux)                  | 1.26            | 22.24               | N/A                   |
|                |         |   | Ant 2(Main)                 | 1.83            | 22.19               | N/A                   |
|                | UNII 2A |   | Ant 1(Aux)                  | 2.92            | 29.23               | 23.23                 |
|                |         |   | Ant 2(Main)                 | 1.83            | 29.20               | 23.20                 |
|                | UNII 2C |   | Ant 1(Aux)                  | 3.29            | 29.25               | 23.25                 |
|                |         |   | Ant 2(Main)                 | 1.84            | 29.20               | 23.20                 |
|                | UNII 3  |   | Ant 1(Aux)                  | 1.48            | N/A                 | 30.00                 |
|                |         |   | Ant 2(Main)                 | 1.68            | N/A                 | 30.00                 |
| MIMO           | UNII 1  | 802.11a/<br>802.11n20/<br>802.11ac20    | Ant 1(Aux) &<br>Ant 2(Main) | 4.56            | 22.19               | N/A                   |
|                | UNII 2A |   |                             | 5.40            | 29.20               | 23.20                 |
|                | UNII 2C |   |                             | 5.61            | 29.20               | 23.20                 |
|                | UNII 3  |   |                             | 4.59            | N/A                 | 30.00                 |
| SISO           | UNII 1  | 802.11n40/<br>802.11ac40/<br>802.11ac80 | Ant 1(Aux)                  | 1.26            | 23.01               | N/A                   |
|                |         |   | Ant 2(Main)                 | 1.83            | 23.01               | N/A                   |
|                | UNII 2A |   | Ant 1(Aux)                  | 2.92            | 30.00               | 23.98                 |
|                |         |   | Ant 2(Main)                 | 1.83            | 30.00               | 23.98                 |
|                | UNII 2C |   | Ant 1(Aux)                  | 3.29            | 30.00               | 23.98                 |
|                |         |   | Ant 2(Main)                 | 1.84            | 30.00               | 23.98                 |
|                | UNII 3  |   | Ant 1(Aux)                  | 1.48            | N/A                 | 23.98                 |
|                |         |   | Ant 2(Main)                 | 1.68            | N/A                 | 23.98                 |
| MIMO           | UNII 1  | 802.11n40/<br>802.11ac40/<br>802.11ac80 | Ant 1(Aux) &<br>Ant 2(Main) | 4.56            | 23.01               | N/A                   |
|                | UNII 2A |   |                             | 5.40            | 30.00               | 23.98                 |
|                | UNII 2C |   |                             | 5.61            | 30.00               | 23.98                 |
|                | UNII 3  |   |                             | 4.59            | N/A                 | 23.98                 |

### 8.4. Power Spectral Density

**Limit**

| Band        | Limit          |
|-------------|----------------|
| UNII 1      | 11 dBm/MHz     |
| UNII 2A, 2C | 11 dBm/MHz     |
| UNII 3      | 30 dBm/500 kHz |

**Test Configuration**

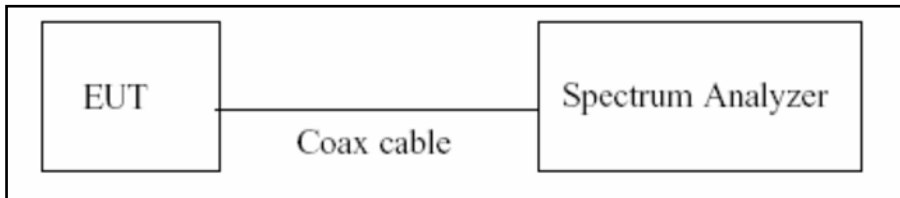

**Test Procedure**

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW  $\geq$  3 MHz
4. Number of points in sweep  $\geq$  2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add  $10 \log(1/x)$ , where x is the duty cycle, to the peak of the spectrum.



**Sample Calculation**

Total PSD(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

**Note**

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

| Band    | Loss(dB) |
|---------|----------|
| UNII 1  | 20.87    |
| UNII 2A | 20.87    |
| UNII 2C | 20.87    |
| UNII 3  | 20.87    |


(Actual value of loss for the attenuator and cable combination)

### 8.5. Frequency Stability

#### Limit

Maintained within the band

#### Test Configuration

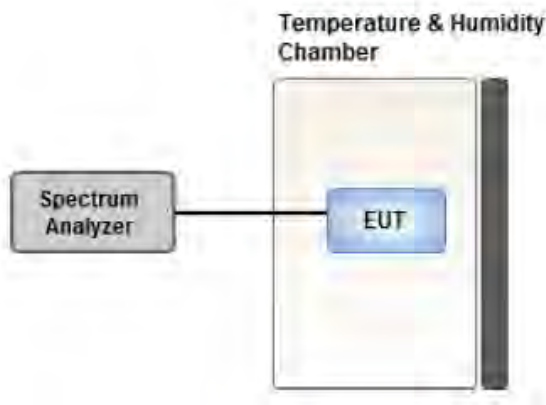

#### Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

### 8.6. AC Power line Conducted Emissions

#### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dBμV) |           |
|-----------------------|---------------|-----------|
|                       | Quasi-peak    | Average   |
| 0.15 to 0.50          | 66 to 56*     | 56 to 46* |
| 0.50 to 5             | 56            | 46        |
| 5 to 30               | 60            | 50        |
| 5 to 30               | 60            | 50        |

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

#### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

#### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

#### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor



### 8.7. Radiated Test

**Limit**

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.
  
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.
  
3. UNII 3: All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.

**FCC**

| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490   | $2400/F(\text{kHz})$  | 300                      |
| 0.490 – 1.705   | $24000/F(\text{kHz})$ | 30                       |
| 1.705 – 30      | 30                    | 30                       |

**ISED**

| Frequency (MHz) | Field Strength (uA/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490   | $6.37/F(\text{kHz})$  | 300                      |
| 0.490 – 1.705   | $63.7/F(\text{kHz})$  | 30                       |
| 1.705 – 30      | 0.08                  | 30                       |




FCC&ISED


| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88           | 100                   | 3                        |
| 88-216          | 150                   | 3                        |
| 216-960         | 200                   | 3                        |
| Above 960       | 500                   | 3                        |

Test Configuration

Below 30 MHz

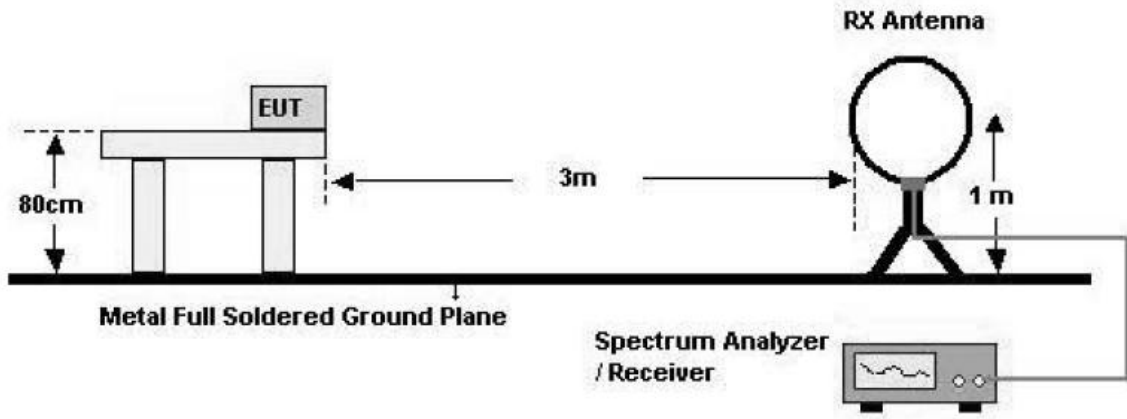


30 MHz - 1 GHz

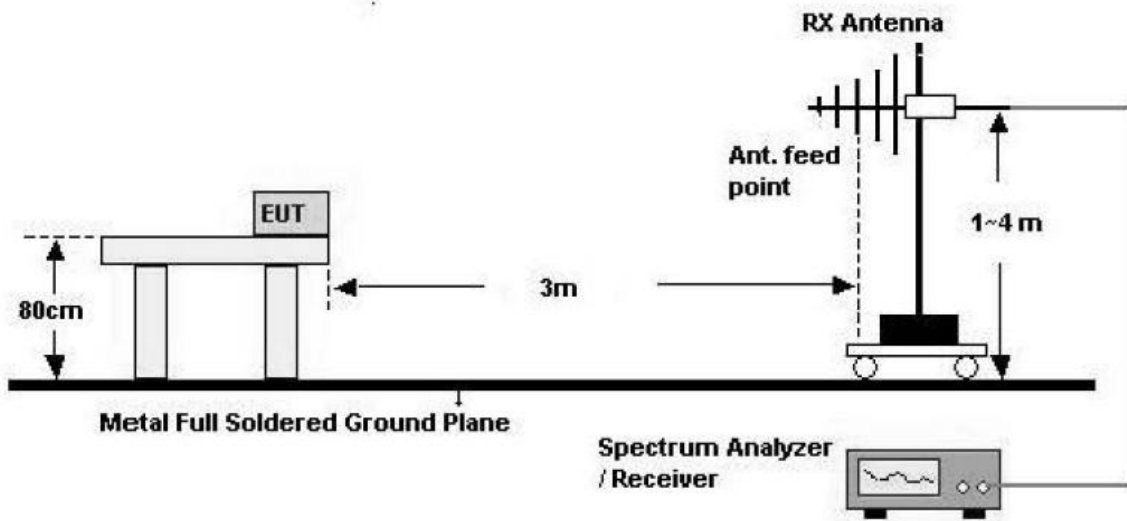



Above 1 GHz

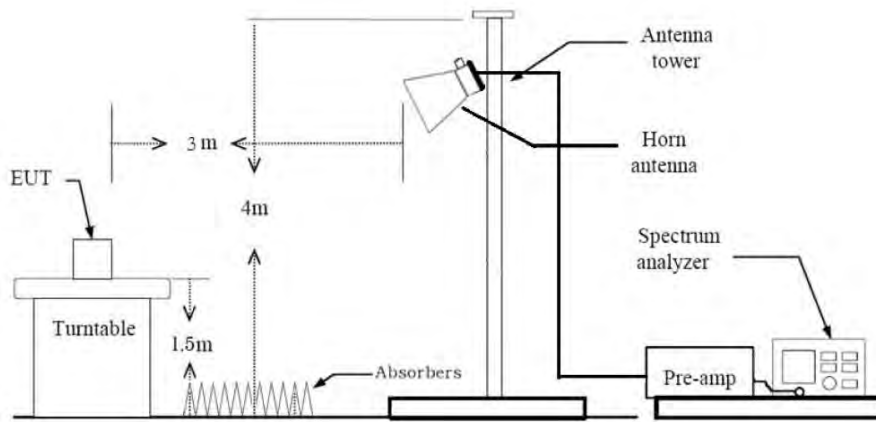

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz

※In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

**8. Spectrum Setting**

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle.

(2) Measurement Type (Average, G.6.c in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- The analyzer is set to linear detector mode.
- Averaging type = power (*i.e.*, RMS)
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

**8. Spectrum Setting**

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where x is the duty cycle.

(2) Measurement Type (Average, G.6.c in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- The analyzer is set to linear detector mode.
- Averaging type = power (*i.e.*, RMS)
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

**9. Measured Frequency Range :**

- 4500MHz ~ 5150MHz
- 5350MHz ~ 5460MHz
- 5460MHz ~ 5470MHz



- (75 MHz or more below the 5725MHz) ~ 5725MHz
- 5850MHz ~ (75 MHz or more above the 5850MHz)
- 10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
- 11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator  
+ Distance Factor(D.F)



### 8.8. Receiver Spurious Emissions

**Limit**


| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88           | 100                   | 3                        |
| 88-216          | 150                   | 3                        |
| 216-960         | 200                   | 3                        |
| Above 960       | 500                   | 3                        |

**Note:**

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

**Test Configuration**


30 MHz - 1 GHz

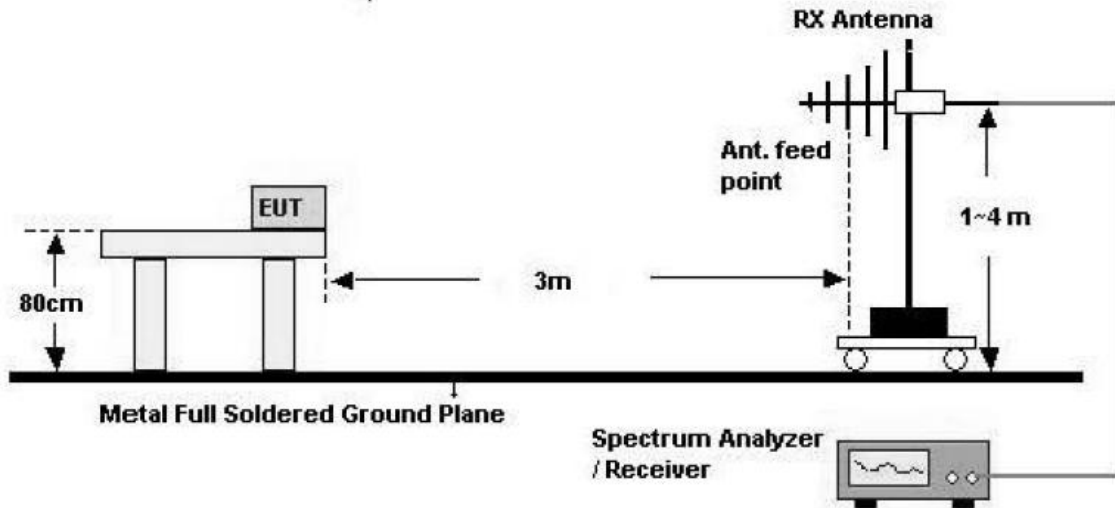

**Test Procedure of Receiver Spurious Emissions (Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

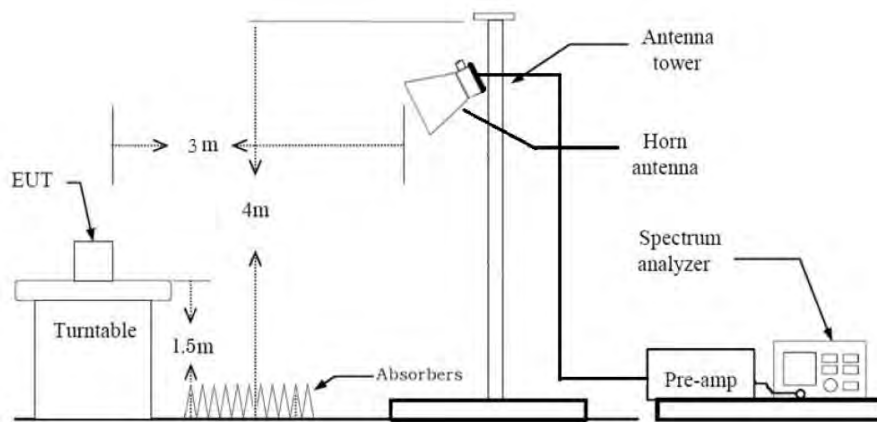

### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Average):
    - We performed using a reduced video BW method was done with the analyzer in linear mode
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds





The actual setting value of VBW = 1 kHz

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## 8.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
  - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD,SDM)
  - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
  - Radiated Spurious Emissions : Z
  - Radiated Restricted Band Edge : X-H
4. All datarate of operation were investigated and the worst case datarate results are reported
  - 802.11a : 6Mbps
  - 802.11n : MCS0
  - 802.11ac : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + Notebook

### Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. SISO & MIMO were tested and the all case results are reported.
  - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD)



## 9. SUMMARY OF TEST RESULTS

### FCC

| Test Description   | FCC Part Section(s)                 | Test Limit   | Test Condition | Test Result |
|--|-------------------------------------|--|----------------|-------------|
| 26dB Bandwidth   | § 15.407<br>(for Power Measurement) | N/A  | Conducted      | PASS        |
| 6 dB Bandwidth   | § 15.407(e)                         | >500 kHz<br>(5725-5850 MHz)  |                | PASS        |
| Maximum Conducted Output Power   | § 15.407(a)(1)                      | < 250 mW(5150-5250 MHz)<br><br>< 250 mW or 11+10 log log <sub>10</sub> (BW) dBm (5250-5350 MHz)<br><br>< 250 mW or 11+10 log log <sub>10</sub> (BW) dBm (5470-5725 MHz)<br><br><1 W(5725-5850 MHz) |                | PASS        |
| Peak Power Spectral Density  | § 15.407(a)(1),(5)                  | <11 dBm/ MHz (5150-5250 MHz)<br><11 dBm/ MHz (5250-5350 MHz)<br><11 dBm/ MHz (5470-5725 MHz)<br><30 dBm/500 kHz(5725-5850 MHz)   |                | PASS        |
| Frequency Stability  | § 15.407(g)<br>§ 2.1055             | Maintained within the band   |                | PASS        |
| AC Conducted Emissions<br>150 kHz-30 MHz                                     | 15.207                              | <FCC 15.207 limits   |                | PASS        |
| Undesirable Emissions  | § 15.407(b)                         | <-27 dBm/MHz EIRP<br>(UNII1, 2A, 2C)<br>cf. Section 8.7 (UNII 3)   |                | PASS        |
| General Field Strength Limits(Restricted Bands and Radiated Emission Limits) | 15.205,<br>15.407(b)(5), (6)        | Emissions in restricted bands must meet the radiated limits detailed in 15.209   | Radiated       | PASS        |



| ISED  |                               |   |                |             |
|---|-------------------------------|---|----------------|-------------|
| Test Description  | ISED Part Section(s)          | Test Limit  | Test Condition | Test Result |
| 99% Bandwidth   | RSS-GEN, 6.7                  | N/A   | CONDUCTED      | PASS        |
| 6 dB Bandwidth  | RSS-247, 6.2.4.1              | > 500 kHz<br>(5725~5850 MHz)  |                | PASS        |
| Maximum Conducted Output Power,   | RSS-247, 6.2                  | < 250 mW or 11+10 log <sub>10</sub><br>(BW) dBm<br>(5470-5600, 5650-5725 MHz)<br>Whichever power is less  |                | PASS        |
|   | RSS-247, 6.2.4.1              | <1 W<br>(5725-5850 MHz)   |                |             |
| Maximum e.i.r.p   | RSS-247, 6.2                  | < 200 mW or 10+10 log <sub>10</sub><br>(BW) dBm<br>(5150-5250 MHz)<br>< 1 W or 17+10 log <sub>10</sub> (BW)<br>dBm<br>(5250-5350 MHz)<br>< 1 W or 17+10 log <sub>10</sub> (BW)<br>dBm<br>(5470-5725 MHz)<br>Whichever power is less |                | PASS        |
|   |                               |   |                |             |
| Power Spectral Density  | RSS-247 6.2                   | <10 dBm/ MHz(e.i.r.p.)<br>(5150-5250 MHz)<br><11 dBm/MHz(Conducted)<br>(5250-5350 MHz, 5470-5600<br>MHz, 5650-5725 MHz)   |                | PASS        |
|   | RSS-247, 6.2.4.1              | <30 dBm/500<br>kHz(Conducted)<br>(5725-5850 MHz)  |                |             |
| Frequency Stability   | RSS-GEN 8.11                  | should be kept within at<br>least the central 80% of its<br>permitted operating<br>frequency band in order to<br>minimize the possibility of<br>out-of-band operation.  |                | PASS        |
| AC Conducted Emissions<br>150 kHz-30 MHz  | RSS-GEN, 8.8                  | RSS-GEN<br>section 8.8 table 4  |                | PASS        |
| Undesirable Emissions   | RSS-247, 6.2.1.2              | 26 dBc at 5250~5350 MHz<br>(5150~5350 MHz)  | PASS           |             |
|   | RSS-247, 6.2                  | <-27 dBm/ MHz EIRP<br>(5150-5350 MHz,<br>5470-5725 MHz)   | PASS           |             |
|   | RSS-247, 6.2.4.2              | cf. Section 9.8.1 (UNII 3)  |                |             |
| General Field Strength<br>Limits(Restricted Bands<br>and Radiated Emission<br>Limits) | RSS-Gen, 8.9<br>RSS-Gen, 8.10 | RSS-Gen<br>section 8.9 table 5, 6<br>section 8.10 table 7   | RADIATED       | PASS        |
| Receiver Spurious<br>Emissions  | RSS-GEN, 5<br>RSS-GEN, 7.3    | RSS-GEN section 7.3<br>table 3  | PASS           |             |



## 10. TEST RESULT

### 10.1 26DB BANDWIDTH & 99 % BANDWIDTH

[ANT1]

| 802.11a Mode    |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|-----------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. |                      |                     |
| 5180            | 36          | 19.98                | 16.479              |
| 5200            | 40          | 20.02                | 16.420              |
| 5240            | 48          | 20.01                | 16.433              |
| 5260            | 52          | 19.70                | 16.476              |
| 5300            | 60          | 19.81                | 16.435              |
| 5320            | 64          | 20.16                | 16.548              |
| 5500            | 100         | 19.67                | 16.480              |
| 5580            | 116         | 19.80                | 16.412              |
| 5720            | 144         | 24.16                | 16.630              |
| 5745            | 149         | 23.64                | 16.645              |
| 5785            | 157         | 28.20                | 16.872              |
| 5825            | 165         | 27.57                | 16.970              |

| 802.11n(HT20) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|--------------------|-------------|----------------------|---------------------|
| Frequency [MHz]    | Channel No. |                      |                     |
| 5180               | 36          | 19.77                | 17.616              |
| 5200               | 40          | 19.96                | 17.608              |
| 5240               | 48          | 20.04                | 17.580              |
| 5260               | 52          | 19.89                | 17.582              |
| 5300               | 60          | 19.89                | 17.578              |
| 5320               | 64          | 19.80                | 17.586              |
| 5500               | 100         | 19.74                | 17.592              |
| 5580               | 116         | 19.92                | 17.583              |
| 5720               | 144         | 20.05                | 17.597              |
| 5745               | 149         | 19.92                | 17.638              |
| 5785               | 157         | 20.13                | 17.652              |
| 5825               | 165         | 21.68                | 17.700              |



| 802.11n(HT40) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|--------------------|-------------|----------------------|---------------------|
| Frequency [MHz]    | Channel No. |                      |                     |
| 5190               | 38          | 40.42                | 36.174              |
| 5230               | 46          | 40.65                | 36.228              |
| 5270               | 54          | 40.52                | 36.198              |
| 5310               | 62          | 40.13                | 36.127              |
| 5510               | 102         | 40.14                | 36.222              |
| 5550               | 110         | 40.24                | 36.134              |
| 5710               | 142         | 40.77                | 36.162              |
| 5755               | 151         | 49.73                | 36.578              |
| 5795               | 159         | 79.54                | 45.256              |

| 802.11ac(VHT20) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz]      | Channel No. |                      |                     |
| 5180                 | 36          | 20.07                | 17.610              |
| 5200                 | 40          | 20.08                | 17.741              |
| 5240                 | 48          | 20.20                | 17.697              |
| 5260                 | 52          | 20.17                | 17.727              |
| 5300                 | 60          | 19.93                | 17.725              |
| 5320                 | 64          | 20.22                | 17.727              |
| 5500                 | 100         | 20.21                | 17.747              |
| 5580                 | 116         | 20.18                | 17.717              |
| 5720                 | 144         | 20.26                | 17.756              |
| 5745                 | 149         | 20.34                | 17.782              |
| 5785                 | 157         | 20.14                | 17.765              |
| 5825                 | 165         | 25.39                | 17.788              |



| 802.11ac(VHT40) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz]      | Channel No. |                      |                     |
| 5190                 | 38          | 40.07                | 36.105              |
| 5230                 | 46          | 40.60                | 36.342              |
| 5270                 | 54          | 40.51                | 36.337              |
| 5310                 | 62          | 40.36                | 36.315              |
| 5510                 | 102         | 40.85                | 36.249              |
| 5550                 | 110         | 40.70                | 36.269              |
| 5710                 | 142         | 40.67                | 36.319              |
| 5755                 | 151         | 47.04                | 36.376              |
| 5795                 | 159         | 79.94                | 46.759              |

| 802.11ac(VHT80) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz]      | Channel No. |                      |                     |
| 5210                 | 42          | 81.23                | 75.732              |
| 5290                 | 58          | 80.84                | 76.031              |
| 5530                 | 106         | 81.41                | 76.037              |
| 5690                 | 138         | 81.35                | 76.006              |
| 5775                 | 155         | 153.70               | 77.359              |



[ANT2]

| 802.11a Mode    |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|-----------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. |                      |                     |
| 5180            | 36          | 19.82                | 16.407              |
| 5200            | 40          | 19.67                | 16.408              |
| 5240            | 48          | 19.68                | 16.395              |
| 5260            | 52          | 19.77                | 16.401              |
| 5300            | 60          | 19.78                | 16.417              |
| 5320            | 64          | 20.04                | 16.431              |
| 5500            | 100         | 19.74                | 16.429              |
| 5580            | 116         | 19.87                | 16.435              |
| 5720            | 144         | 19.71                | 16.416              |
| 5745            | 149         | 19.85                | 16.475              |
| 5785            | 157         | 24.12                | 16.587              |
| 5825            | 165         | 25.84                | 16.623              |

| 802.11n(HT20) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|--------------------|-------------|----------------------|---------------------|
| Frequency [MHz]    | Channel No. |                      |                     |
| 5180               | 36          | 20.07                | 17.548              |
| 5200               | 40          | 19.96                | 17.641              |
| 5240               | 48          | 19.89                | 17.553              |
| 5260               | 52          | 20.09                | 17.597              |
| 5300               | 60          | 20.09                | 17.568              |
| 5320               | 64          | 20.07                | 17.618              |
| 5500               | 100         | 20.11                | 17.574              |
| 5580               | 116         | 20.23                | 17.590              |
| 5720               | 144         | 19.96                | 17.590              |
| 5745               | 149         | 20.24                | 17.615              |
| 5785               | 157         | 20.40                | 17.643              |
| 5825               | 165         | 23.31                | 17.651              |





| 802.11n(HT40) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|--------------------|-------------|----------------------|---------------------|
| Frequency [MHz]    | Channel No. |                      |                     |
| 5190               | 38          | 40.13                | 36.117              |
| 5230               | 46          | 40.76                | 36.161              |
| 5270               | 54          | 40.14                | 36.080              |
| 5310               | 62          | 40.32                | 36.150              |
| 5510               | 102         | 40.22                | 36.126              |
| 5550               | 110         | 40.45                | 36.147              |
| 5710               | 142         | 40.32                | 36.079              |
| 5755               | 151         | 40.64                | 36.219              |
| 5795               | 159         | 54.62                | 36.609              |

| 802.11ac(VHT20) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz]      | Channel No. |                      |                     |
| 5180                 | 36          | 20.17                | 17.726              |
| 5200                 | 40          | 20.11                | 17.754              |
| 5240                 | 48          | 20.21                | 17.726              |
| 5260                 | 52          | 20.07                | 17.681              |
| 5300                 | 60          | 20.00                | 17.702              |
| 5320                 | 64          | 20.21                | 17.700              |
| 5500                 | 100         | 19.98                | 17.750              |
| 5580                 | 116         | 20.15                | 17.777              |
| 5720                 | 144         | 20.13                | 17.720              |
| 5745                 | 149         | 20.16                | 17.699              |
| 5785                 | 157         | 20.28                | 17.704              |
| 5825                 | 165         | 20.15                | 17.734              |



| 802.11ac(VHT40) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz]      | Channel No. |                      |                     |
| 5190                 | 38          | 40.37                | 36.341              |
| 5230                 | 46          | 40.40                | 36.329              |
| 5270                 | 54          | 40.24                | 36.244              |
| 5310                 | 62          | 40.25                | 36.339              |
| 5510                 | 102         | 40.82                | 36.270              |
| 5550                 | 110         | 40.22                | 36.248              |
| 5710                 | 142         | 40.38                | 36.294              |
| 5755                 | 151         | 40.56                | 36.302              |
| 5795                 | 159         | 40.86                | 36.473              |

| 802.11ac(VHT80) Mode |             | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz]      | Channel No. |                      |                     |
| 5210                 | 42          | 81.11                | 76.007              |
| 5290                 | 58          | 80.61                | 76.018              |
| 5530                 | 106         | 80.57                | 75.958              |
| 5690                 | 138         | 81.18                | 76.027              |
| 5775                 | 155         | 86.35                | 76.018              |



[ANT1]

- ▣ Test Plots(802.11a)


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11a UNII 1 BAND 26dB Bandwidth (CH 40)




802.11a UNII 2A BAND 26dB Bandwidth (CH 64)

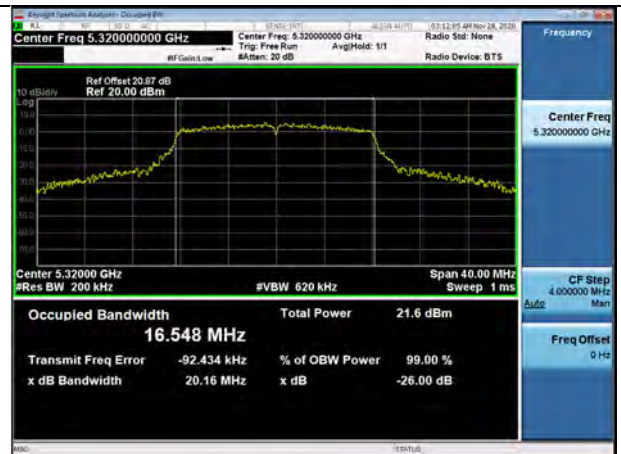

802.11a UNII 2C BAND 26dB Bandwidth (CH144)



802.11a UNII 3 BAND 26dB Bandwidth (CH 157)

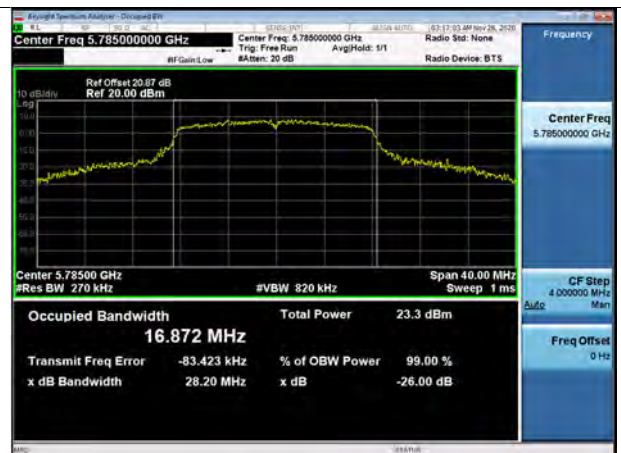





▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only the most wide channel.



802.11n\_HT20 UNII 1 BAND 26dB Bandwidth(CH 48)

802.11n\_HT20 UNII 2A BAND 26dB Bandwidth(CH 60)

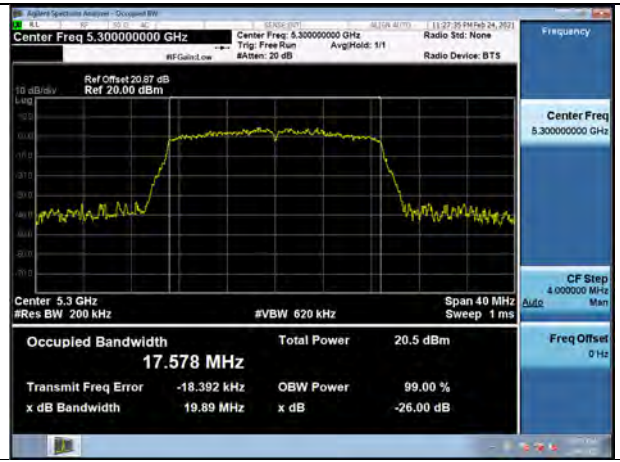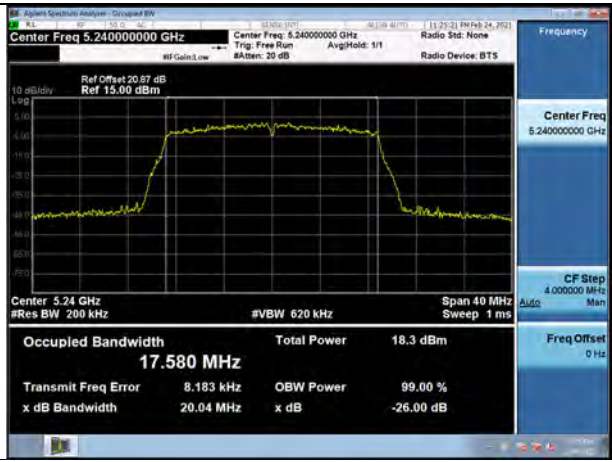

802.11n\_HT20 UNII 2C BAND 26dB Bandwidth(CH 144)

802.11n\_HT20 UNII 3 BAND 26dB Bandwidth(CH 165)

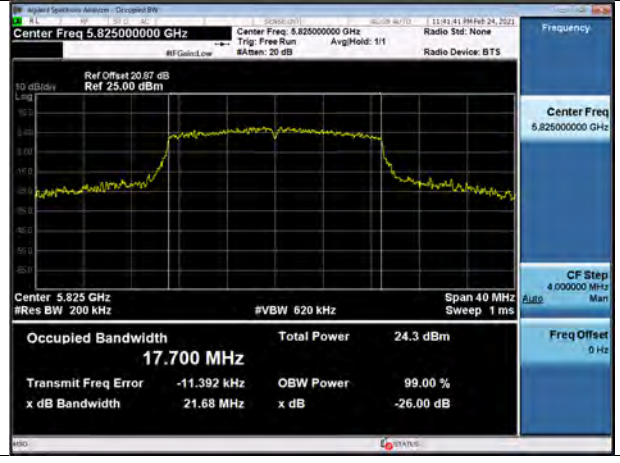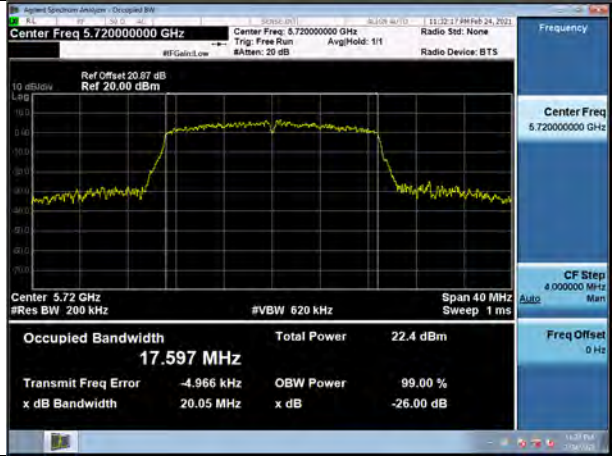




▣ Test Plots(802.11n(HT40))


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11n\_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)

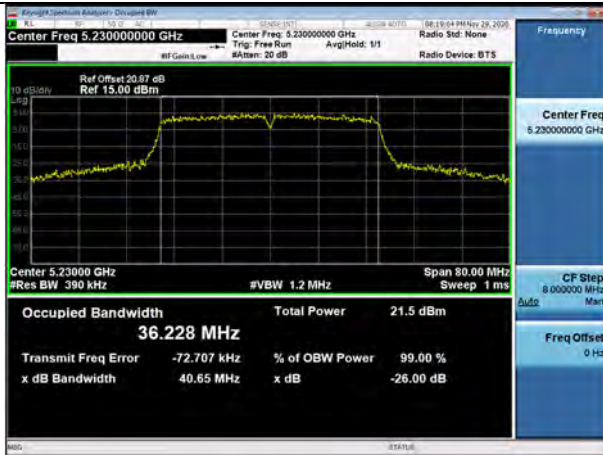

802.11n\_HT40 UNII 2A BAND 26dB Bandwidth (CH 54)

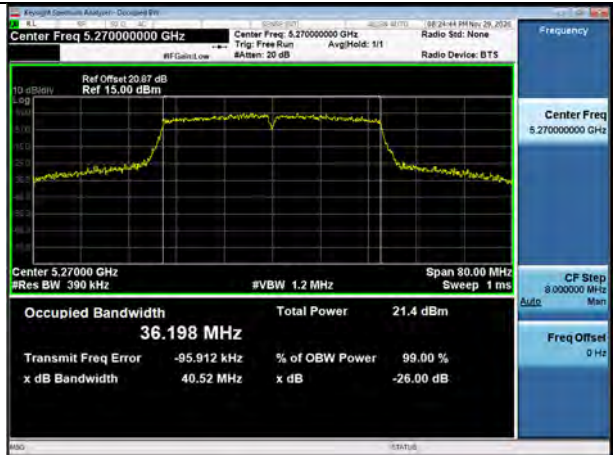

802.11n\_HT40 UNII 2C BAND 26dB Bandwidth(CH 142)



802.11n\_HT40 UNII 3 BAND 26dB Bandwidth (CH 159)








Test Plots(802.11ac(VHT20))


Note:

In order to simplify the report, attached plots were only the most wide channel.


802.11ac\_VHT20 UNII 1 BAND 26dB Bandwidth(CH 48)

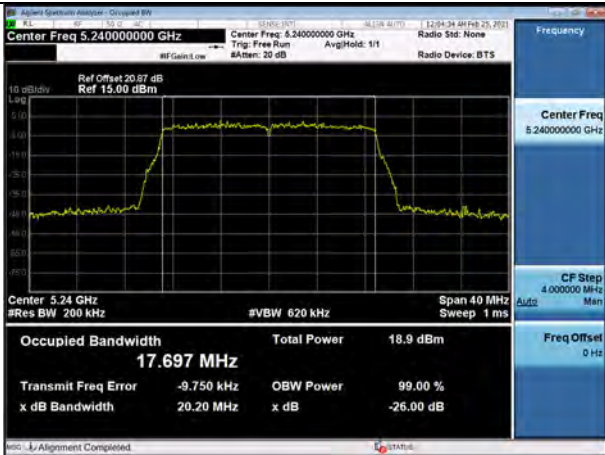

802.11ac\_VHT20 UNII 2A BAND 26dB Bandwidth(CH 64)

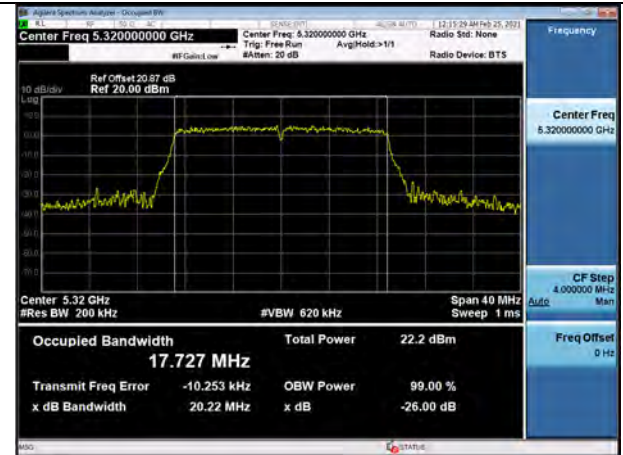

802.11ac\_VHT20 UNII 2C BAND 26dB Bandwidth(CH 144)

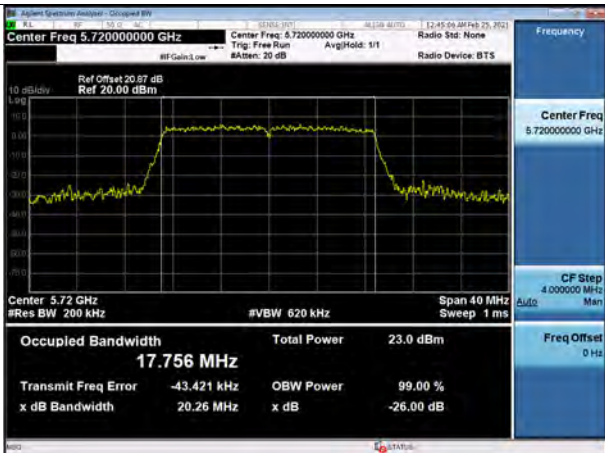

802.11ac\_VHT20 UNII 3 BAND 26dB Bandwidth(CH 165)



Test Plots(802.11ac(VHT40))

Note:

In order to simplify the report, attached plots were only the most wide channel.

|   |   |
|---|---|
| 802.11ac_VHT40 UNII 1 BAND 26dB Bandwidth(CH 46)  | 802.11ac_VHT40 UNII 2A BAND 26dB Bandwidth (CH 54)  |
| <p>Center Freq 5.23000000 GHz</p> <p>Center Freq 5.23000000 GHz</p> <p>Center Freq 5.230000 GHz</p> <p>Occupied Bandwidth 36.342 MHz</p> <p>Total Power 23.0 dBm</p> <p>Transmit Freq Error -63.888 kHz</p> <p>x dB Bandwidth 40.60 MHz</p> | <p>Center Freq 5.27000000 GHz</p> <p>Center Freq 5.27000000 GHz</p> <p>Center Freq 5.270000 GHz</p> <p>Occupied Bandwidth 36.337 MHz</p> <p>Total Power 21.8 dBm</p> <p>Transmit Freq Error -75.566 kHz</p> <p>x dB Bandwidth 40.51 MHz</p> |
| 802.11ac_VHT40 UNII 2C BAND 26dB Bandwidth(CH 102)  | 802.11ac_VHT40 UNII 3 BAND 26dB Bandwidth (CH 159)  |
| <p>Center Freq 5.51000000 GHz</p> <p>Center Freq 5.51000000 GHz</p> <p>Center Freq 5.510000 GHz</p> <p>Occupied Bandwidth 36.249 MHz</p> <p>Total Power 15.9 dBm</p> <p>Transmit Freq Error -73.624 kHz</p> <p>x dB Bandwidth 40.85 MHz</p> | <p>Center Freq 5.79500000 GHz</p> <p>Center Freq 5.79500000 GHz</p> <p>Center Freq 5.795000 GHz</p> <p>Occupied Bandwidth 46.759 MHz</p> <p>Total Power 28.1 dBm</p> <p>Transmit Freq Error 424.78 kHz</p> <p>x dB Bandwidth 79.94 MHz</p>  |

Test Plots(802.11ac(VHT80))


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac\_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)



802.11ac\_VHT80 UNII 2A BAND 26dB Bandwidth (CH 58)

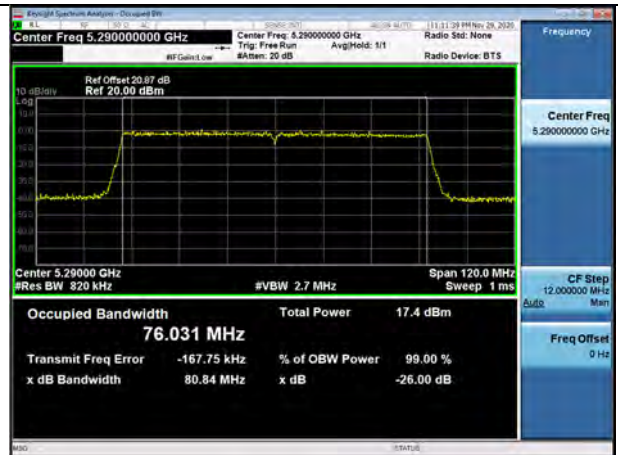

802.11ac\_VHT80 UNII 2C BAND 26dB Bandwidth(CH 106)



802.11ac\_VHT80 UNII 3 BAND 26dB Bandwidth (CH 155)







[ANT2]

▣ Test Plots(802.11a)


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11a UNII 1 BAND 26dB Bandwidth (CH 36)




802.11a UNII 2A BAND 26dB Bandwidth (CH 64)

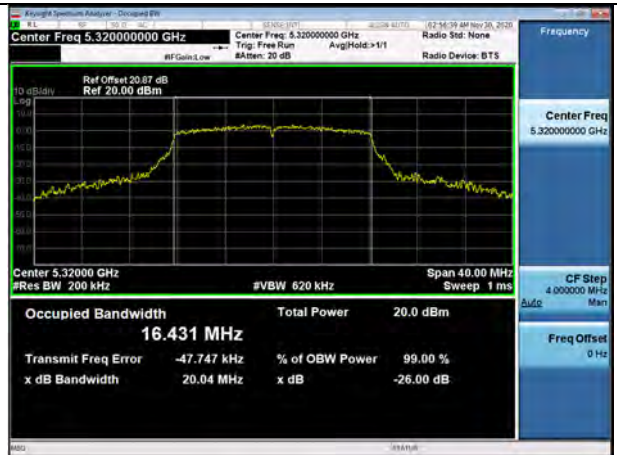

802.11a UNII 2C BAND 26dB Bandwidth (CH116)



802.11a UNII 3 BAND 26dB Bandwidth (CH 165)

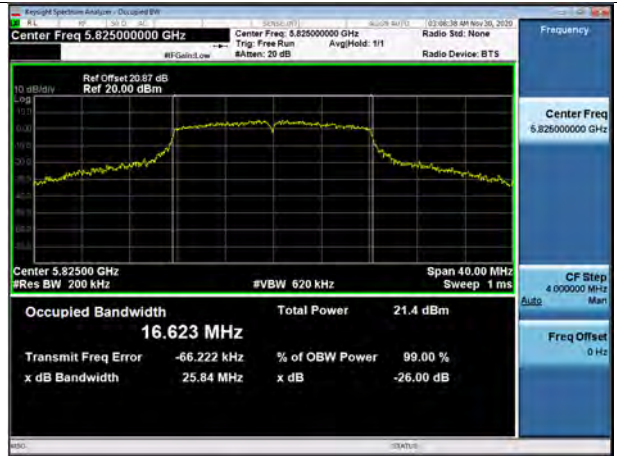



▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only the most wide channel.


802.11n\_HT20 UNII 1 BAND 26dB Bandwidth(CH 36)



802.11n\_HT20 UNII 2A BAND 26dB Bandwidth(CH 60)



802.11n\_HT20 UNII 2C BAND 26dB Bandwidth(CH 116)

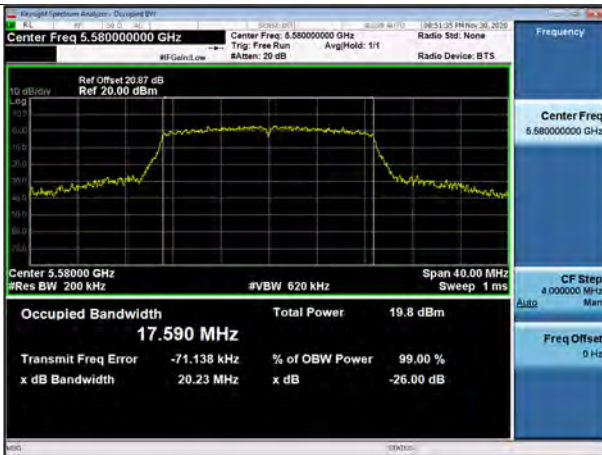

802.11n\_HT20 UNII 3 BAND 26dB Bandwidth(CH 165)






▣ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11n\_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)

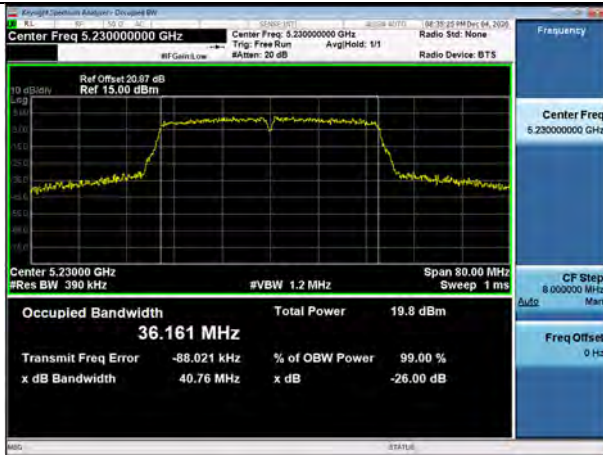

802.11n\_HT40 UNII 2A BAND 26dB Bandwidth (CH 62)



802.11n\_HT40 UNII 2C BAND 26dB Bandwidth(CH 110)



802.11n\_HT40 UNII 3 BAND 26dB Bandwidth (CH 159)






▣ Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only the most wide channel.


802.11ac\_VHT20 UNII 1 BAND 26dB Bandwidth(CH 48)

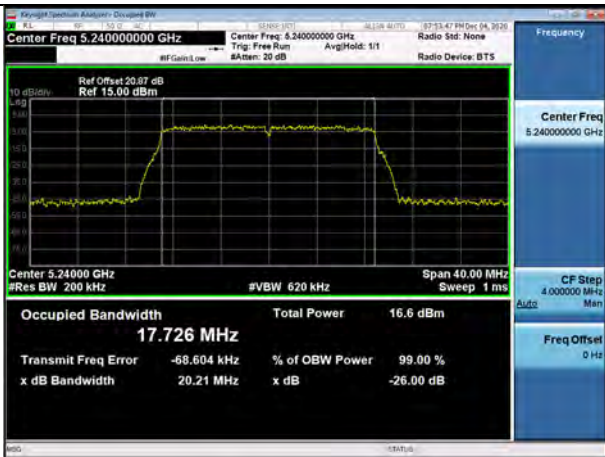


802.11ac\_VHT20 UNII 2A BAND 26dB Bandwidth(CH 64)



802.11ac\_VHT20 UNII 2C BAND 26dB Bandwidth(CH 116)

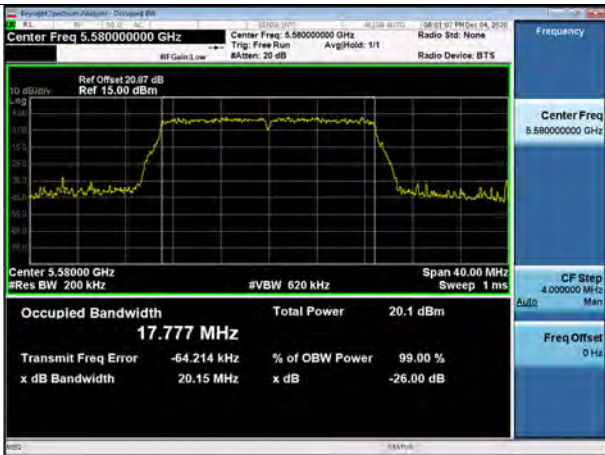

802.11ac\_VHT20 UNII 3 BAND 26dB Bandwidth(CH 157)

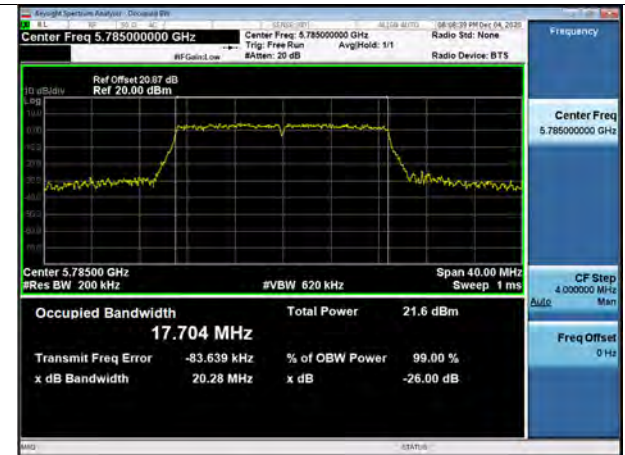



▣ Test Plots(802.11ac(VHT40))

Note:

In order to simplify the report, attached plots were only the most wide channel.


|   |  |
|---|--|
| <p>802.11ac_VHT40 UNII 1 BAND 26dB Bandwidth(CH 46)</p>     | <p>802.11ac_VHT40 UNII 2A BAND 26dB Bandwidth (CH 62)</p>   |
| <p>802.11ac_VHT40 UNII 2C BAND 26dB Bandwidth(CH 102)</p>  | <p>802.11ac_VHT40 UNII 3 BAND 26dB Bandwidth (CH 159)</p>  |

▣ Test Plots(802.11ac(VHT80))


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac\_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)

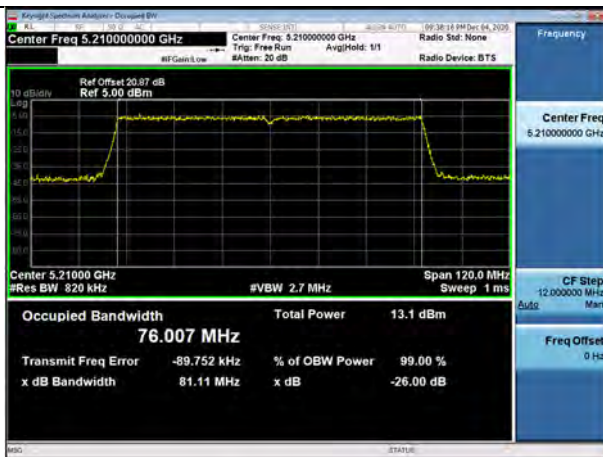


802.11ac\_VHT80 UNII 2A BAND 26dB Bandwidth (CH 58)

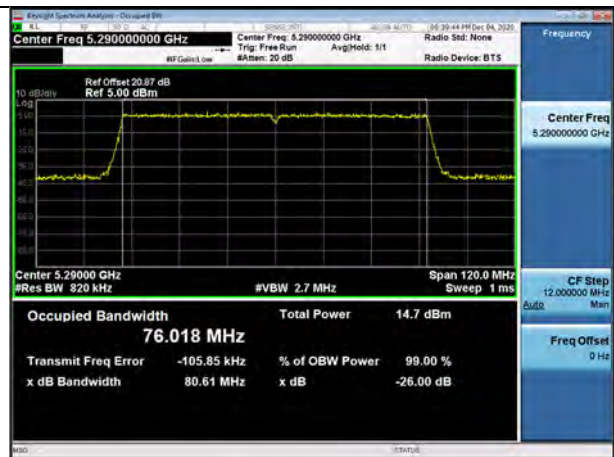

802.11ac\_VHT80 UNII 2C BAND 26dB Bandwidth(CH 138)



802.11ac\_VHT80 UNII 3 BAND 26dB Bandwidth (CH 155)

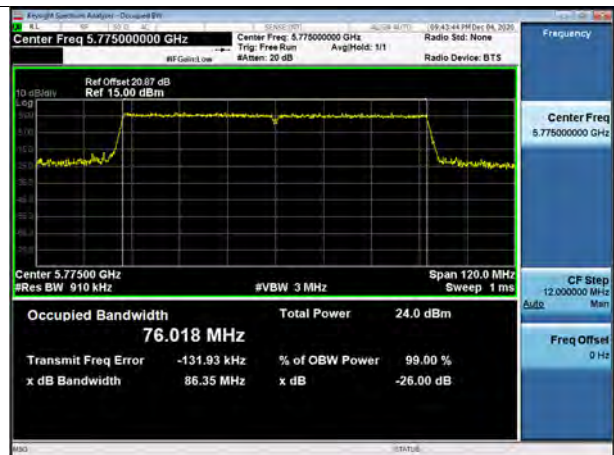

## 10.2 6DB BANDWIDTH

### [ANT1]

| 802.11a Mode       |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|--------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz] | Channel No. |                             |                |             |
| 5745               | 149         | 16.38                       | > 0.5          | Pass        |
| 5785               | 157         | 16.36                       | > 0.5          | Pass        |
| 5825               | 165         | 16.37                       | > 0.5          | Pass        |

| 802.11n(HT20) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|--------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz] | Channel No. |                             |                |             |
| 5745               | 149         | 17.60                       | > 0.5          | Pass        |
| 5785               | 157         | 17.68                       | > 0.5          | Pass        |
| 5825               | 165         | 17.01                       | > 0.5          | Pass        |

| 802.11n(HT40) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|--------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz] | Channel No. |                             |                |             |
| 5755               | 151         | 36.45                       | > 0.5          | Pass        |
| 5795               | 159         | 36.45                       | > 0.5          | Pass        |

| 802.11ac(VHT20) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|----------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz]   | Channel No. |                             |                |             |
| 5745                 | 149         | 17.78                       | > 0.5          | Pass        |
| 5785                 | 157         | 17.78                       | > 0.5          | Pass        |
| 5825                 | 165         | 17.77                       | > 0.5          | Pass        |

| 802.11ac(VHT40) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|----------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz]   | Channel No. |                             |                |             |
| 5755                 | 151         | 36.55                       | > 0.5          | Pass        |
| 5795                 | 159         | 36.51                       | > 0.5          | Pass        |



| 802.11ac(VHT80) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|----------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz]   | Channel No. |                             |                |             |
| 5775                 | 155         | 76.63                       | > 0.5          | Pass        |





[ANT2]

| 802.11a Mode       |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|--------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz] | Channel No. |                             |                |             |
| 5745               | 149         | 16.35                       | > 0.5          | Pass        |
| 5785               | 157         | 16.36                       | > 0.5          | Pass        |
| 5825               | 165         | 16.35                       | > 0.5          | Pass        |

| 802.11n(HT20) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|--------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz] | Channel No. |                             |                |             |
| 5745               | 149         | 17.59                       | > 0.5          | Pass        |
| 5785               | 157         | 17.61                       | > 0.5          | Pass        |
| 5825               | 165         | 17.60                       | > 0.5          | Pass        |

| 802.11n(HT40) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|--------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz] | Channel No. |                             |                |             |
| 5755               | 151         | 36.50                       | > 0.5          | Pass        |
| 5795               | 159         | 36.51                       | > 0.5          | Pass        |

| 802.11ac(VHT20) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|----------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz]   | Channel No. |                             |                |             |
| 5745                 | 149         | 17.78                       | > 0.5          | Pass        |
| 5785                 | 157         | 17.77                       | > 0.5          | Pass        |
| 5825                 | 165         | 17.78                       | > 0.5          | Pass        |

| 802.11ac(VHT40) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|----------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz]   | Channel No. |                             |                |             |
| 5755                 | 151         | 36.48                       | > 0.5          | Pass        |
| 5795                 | 159         | 36.53                       | > 0.5          | Pass        |



| 802.11ac(VHT80) Mode |             | Measured Bandwidth<br>[MHz] | Limit<br>[MHz] | Pass / Fail |
|----------------------|-------------|-----------------------------|----------------|-------------|
| Frequency<br>[MHz]   | Channel No. |                             |                |             |
| 5775                 | 155         | 76.52                       | > 0.5          | Pass        |




[ANT1]


☐ Test Plots

Note: In order to simplify the report, attached plots were only the most narrow channel.

802.11a (CH.157)

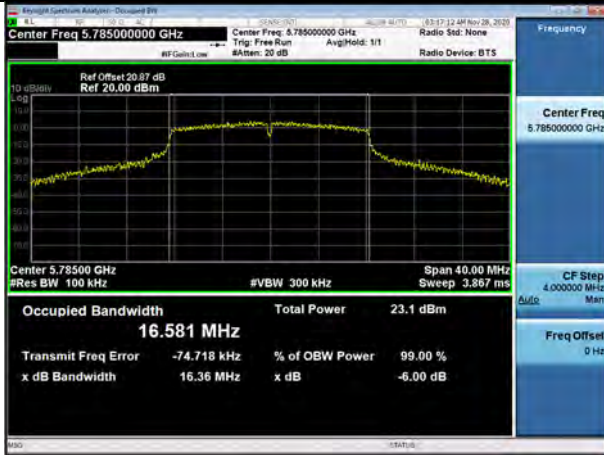

802.11n(HT20) (CH.165)

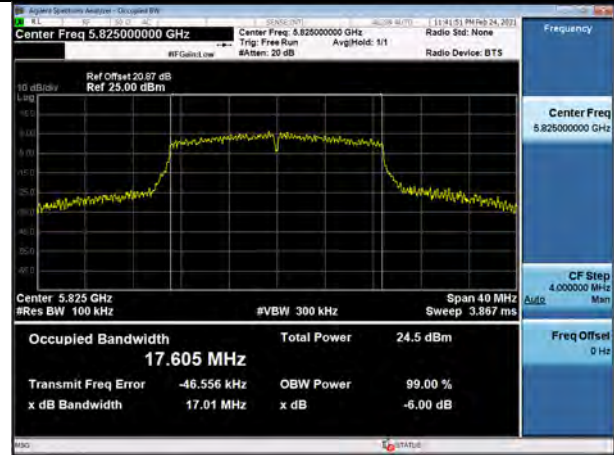

802.11n(HT40) (CH.159)




802.11ac(VHT20) (CH.165)



802.11ac(VHT40) (CH.159)



802.11ac(VHT80) (CH.155)

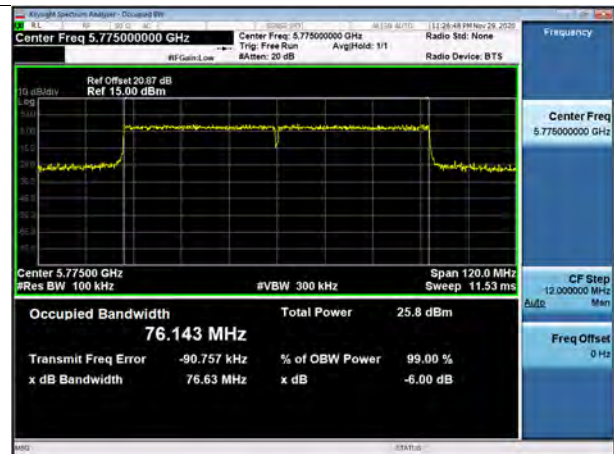




[ANT2]


Test Plots

Note: In order to simplify the report, attached plots were only the most narrow channel.


802.11a (CH.165)

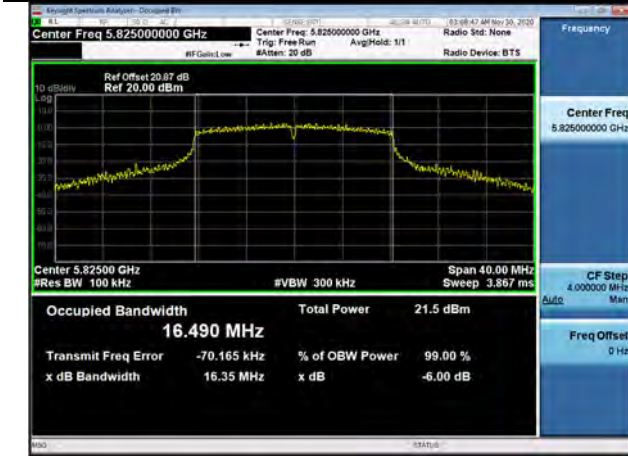


802.11n(HT20) (CH.149)

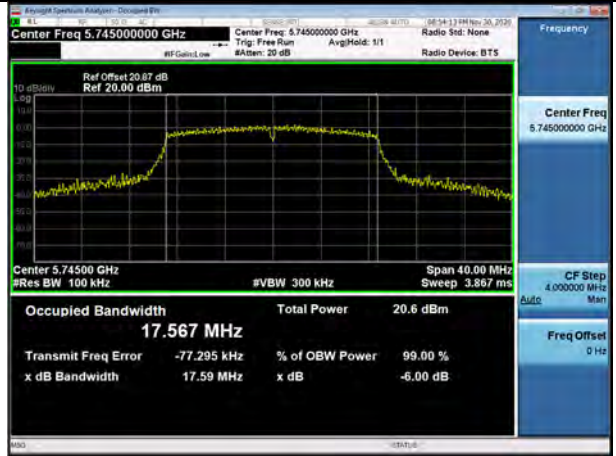


802.11n(HT40) (CH.151)

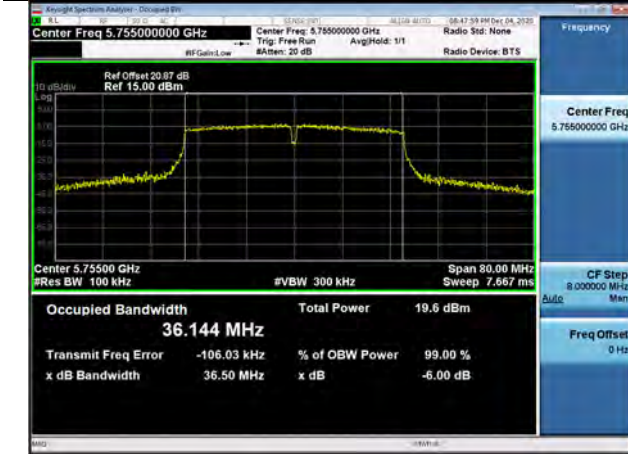


802.11ac(VHT20) (CH.157)

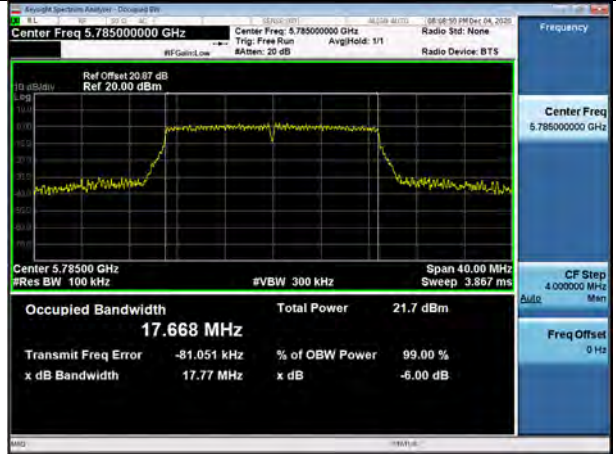

802.11ac(VHT40) (CH.151)

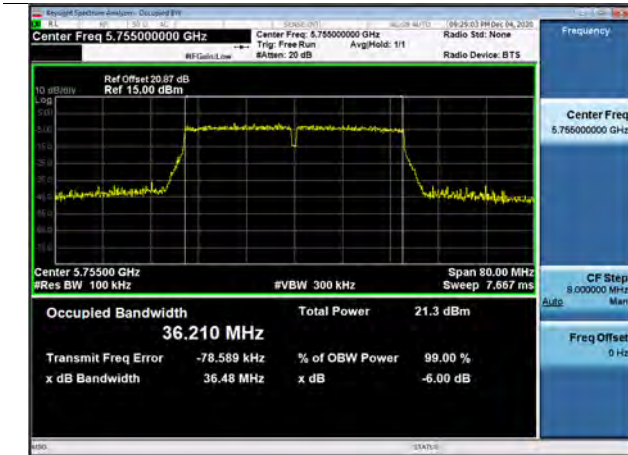

802.11ac(VHT80) (CH.155)

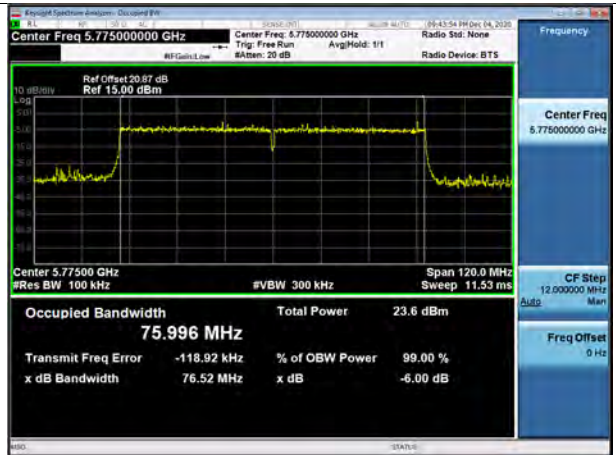



**99 % Bandwidth measurement(ISED)**

**[ANT1]**

| 802.11a Mode    |             | Measured Bandwidth [MHz] |
|-----------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. |                          |
| 5180            | 36          | 16.763                   |
| 5200            | 40          | 16.771                   |
| 5240            | 48          | 16.733                   |
| 5260            | 52          | 16.726                   |
| 5300            | 60          | 16.823                   |
| 5320            | 64          | 16.846                   |
| 5500            | 100         | 16.816                   |
| 5580            | 116         | 16.797                   |
| 5720            | 144         | 16.812                   |
| 5745            | 149         | 17.051                   |
| 5785            | 157         | 17.312                   |
| 5825            | 165         | 17.229                   |

| 802.11n(HT20) Mode |             | Measured Bandwidth [MHz] |
|--------------------|-------------|--------------------------|
| Frequency [MHz]    | Channel No. |                          |
| 5180               | 36          | 17.721                   |
| 5200               | 40          | 17.698                   |
| 5240               | 48          | 17.725                   |
| 5260               | 52          | 17.761                   |
| 5300               | 60          | 17.761                   |
| 5320               | 64          | 17.760                   |
| 5500               | 100         | 17.768                   |
| 5580               | 116         | 17.793                   |
| 5720               | 144         | 17.833                   |
| 5745               | 149         | 17.827                   |
| 5785               | 157         | 17.819                   |
| 5825               | 165         | 17.865                   |



| 802.11n(HT40) Mode |             | Measured Bandwidth [MHz] |
|--------------------|-------------|--------------------------|
| Frequency [MHz]    | Channel No. |                          |
| 5190               | 38          | 36.361                   |
| 5230               | 46          | 36.588                   |
| 5270               | 54          | 36.522                   |
| 5310               | 62          | 36.513                   |
| 5510               | 102         | 36.443                   |
| 5550               | 110         | 36.510                   |
| 5710               | 142         | 36.531                   |
| 5755               | 151         | 36.847                   |
| 5795               | 159         | 43.978                   |

| 802.11ac(VHT20) Mode |             | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz]      | Channel No. |                          |
| 5180                 | 36          | 17.752                   |
| 5200                 | 40          | 17.908                   |
| 5240                 | 48          | 17.866                   |
| 5260                 | 52          | 17.902                   |
| 5300                 | 60          | 17.922                   |
| 5320                 | 64          | 17.921                   |
| 5500                 | 100         | 17.948                   |
| 5580                 | 116         | 17.930                   |
| 5720                 | 144         | 18.008                   |
| 5745                 | 149         | 18.021                   |
| 5785                 | 157         | 17.976                   |
| 5825                 | 165         | 18.061                   |



| 802.11ac(VHT40) Mode |             | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz]      | Channel No. |                          |
| 5190                 | 38          | 36.437                   |
| 5230                 | 46          | 36.667                   |
| 5270                 | 54          | 36.526                   |
| 5310                 | 62          | 36.520                   |
| 5510                 | 102         | 36.499                   |
| 5550                 | 110         | 36.561                   |
| 5710                 | 142         | 36.588                   |
| 5755                 | 151         | 36.757                   |
| 5795                 | 159         | 37.766                   |

| 802.11ac(VHT80) Mode |             | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz]      | Channel No. |                          |
| 5210                 | 42          | 76.193                   |
| 5290                 | 58          | 76.189                   |
| 5530                 | 106         | 76.198                   |
| 5690                 | 138         | 76.325                   |
| 5775                 | 155         | 76.623                   |



[ANT2]

| 802.11a Mode    |             | Measured Bandwidth [MHz] |
|-----------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. |                          |
| 5180            | 36          | 16.598                   |
| 5200            | 40          | 16.573                   |
| 5240            | 48          | 16.578                   |
| 5260            | 52          | 16.586                   |
| 5300            | 60          | 16.594                   |
| 5320            | 64          | 16.645                   |
| 5500            | 100         | 16.612                   |
| 5580            | 116         | 16.592                   |
| 5720            | 144         | 16.600                   |
| 5745            | 149         | 16.727                   |
| 5785            | 157         | 16.797                   |
| 5825            | 165         | 16.834                   |

| 802.11n(HT20) Mode |             | Measured Bandwidth [MHz] |
|--------------------|-------------|--------------------------|
| Frequency [MHz]    | Channel No. |                          |
| 5180               | 36          | 17.708                   |
| 5200               | 40          | 17.770                   |
| 5240               | 48          | 17.747                   |
| 5260               | 52          | 17.640                   |
| 5300               | 60          | 17.682                   |
| 5320               | 64          | 17.710                   |
| 5500               | 100         | 17.677                   |
| 5580               | 116         | 17.703                   |
| 5720               | 144         | 17.731                   |
| 5745               | 149         | 17.714                   |
| 5785               | 157         | 17.763                   |
| 5825               | 165         | 17.789                   |





| 802.11n(HT40) Mode |             | Measured Bandwidth [MHz] |
|--------------------|-------------|--------------------------|
| Frequency [MHz]    | Channel No. |                          |
| 5190               | 38          | 36.321                   |
| 5230               | 46          | 36.424                   |
| 5270               | 54          | 36.406                   |
| 5310               | 62          | 36.322                   |
| 5510               | 102         | 36.421                   |
| 5550               | 110         | 36.295                   |
| 5710               | 142         | 36.466                   |
| 5755               | 151         | 36.523                   |
| 5795               | 159         | 37.067                   |

| 802.11ac(VHT20) Mode |             | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz]      | Channel No. |                          |
| 5180                 | 36          | 17.935                   |
| 5200                 | 40          | 17.930                   |
| 5240                 | 48          | 17.949                   |
| 5260                 | 52          | 17.922                   |
| 5300                 | 60          | 17.902                   |
| 5320                 | 64          | 18.027                   |
| 5500                 | 100         | 17.916                   |
| 5580                 | 116         | 17.944                   |
| 5720                 | 144         | 17.943                   |
| 5745                 | 149         | 17.865                   |
| 5785                 | 157         | 17.946                   |
| 5825                 | 165         | 17.937                   |



| 802.11ac(VHT40) Mode |             | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz]      | Channel No. |                          |
| 5190                 | 38          | 36.553                   |
| 5230                 | 46          | 36.446                   |
| 5270                 | 54          | 36.604                   |
| 5310                 | 62          | 36.587                   |
| 5510                 | 102         | 36.501                   |
| 5550                 | 110         | 36.541                   |
| 5710                 | 142         | 36.456                   |
| 5755                 | 151         | 36.514                   |
| 5795                 | 159         | 36.688                   |

| 802.11ac(VHT80) Mode |             | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz]      | Channel No. |                          |
| 5210                 | 42          | 76.231                   |
| 5290                 | 58          | 76.293                   |
| 5530                 | 106         | 76.221                   |
| 5690                 | 138         | 76.279                   |
| 5775                 | 155         | 76.276                   |



▣ Test Plots(802.11a)

[ANT1]

Note:

In order to simplify the report, attached plots were only the most narrow channel.

802.11a UNII 1 (CH 40)



802.11a UNII 2A (CH 64)



802.11a UNII 2C (CH 100)



802.11a UNII 3 (CH 157)




▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only the most narrow channel.


802.11n\_HT20 UNII 1 (CH 48)

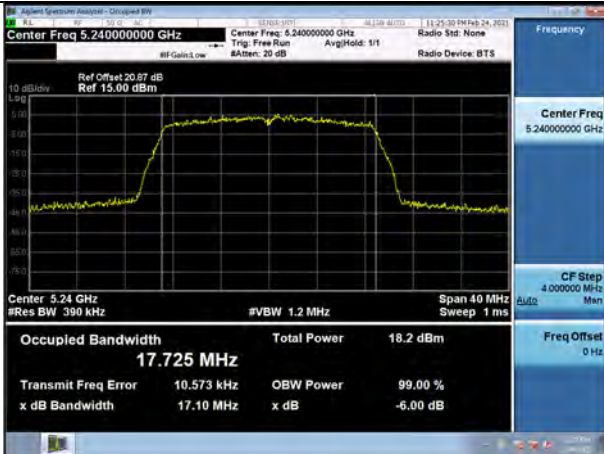


802.11n\_HT20 UNII 2A (CH 60)



802.11n\_HT20 UNII 2C (CH 144)

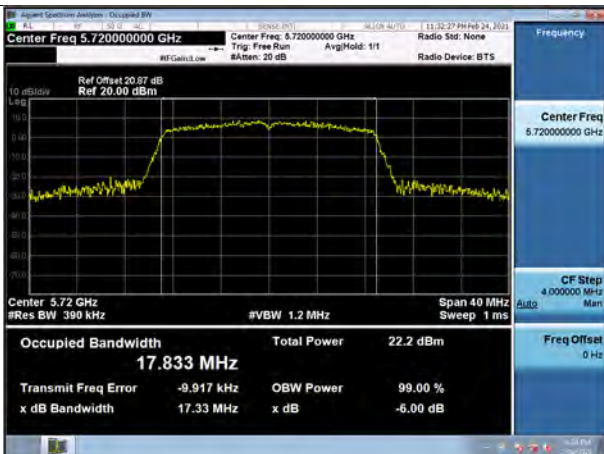

802.11n\_HT20 UNII 3 (CH 165)

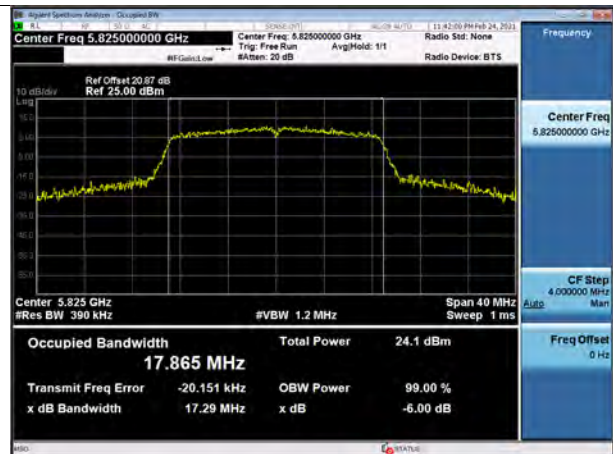




▣ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only the most narrow channel.

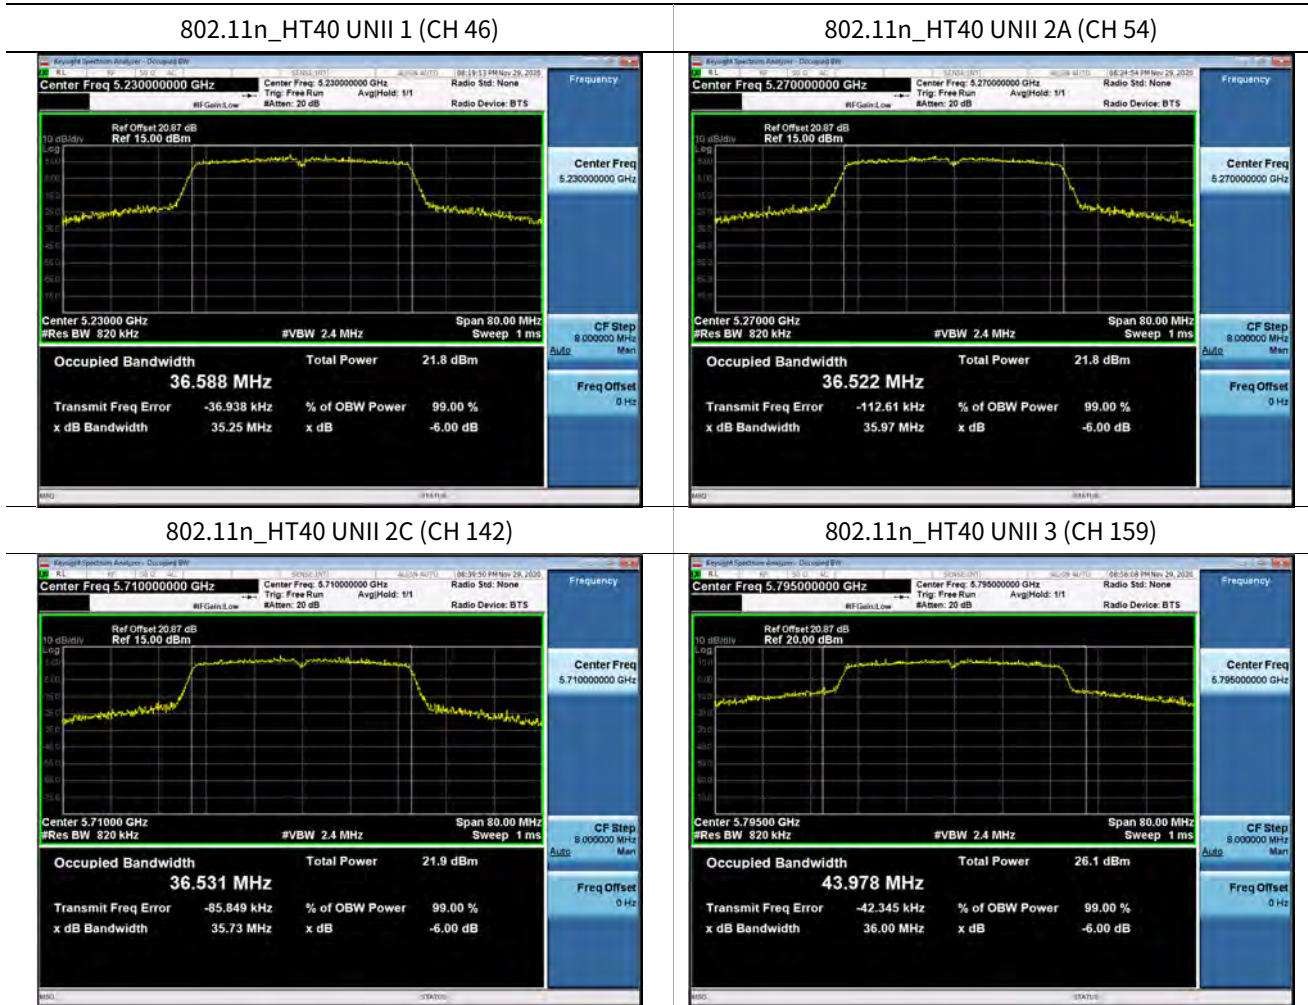




▣ Test Plots(802.11ac(VHT20))


Note:

In order to simplify the report, attached plots were only the most narrow channel.


802.11ac\_VHT20 UNII 1 (CH 40)

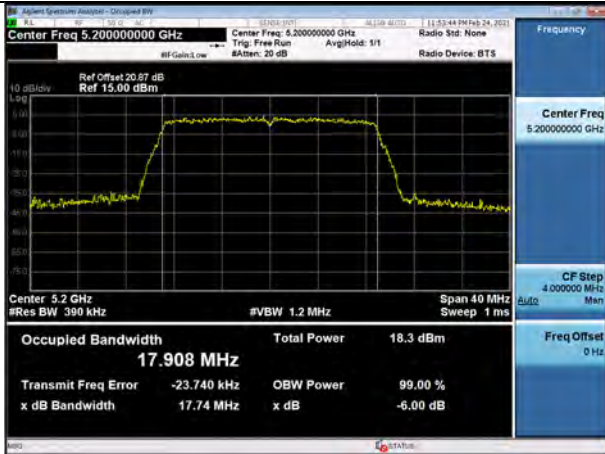

802.11ac\_VHT20 UNII 2A (CH 60)

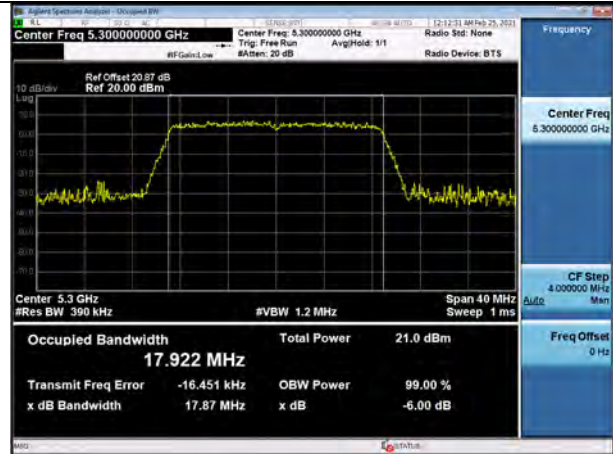

802.11ac\_VHT20 UNII 2C (CH 144)

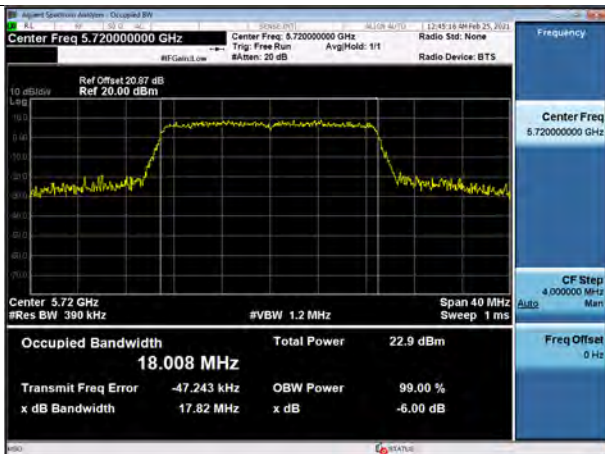

802.11ac\_VHT20 UNII 3 (CH 165)




▣ Test Plots(802.11ac(VHT40))


Note:

In order to simplify the report, attached plots were only the most narrow channel.

802.11ac\_VHT40 UNII 1 (CH 46)

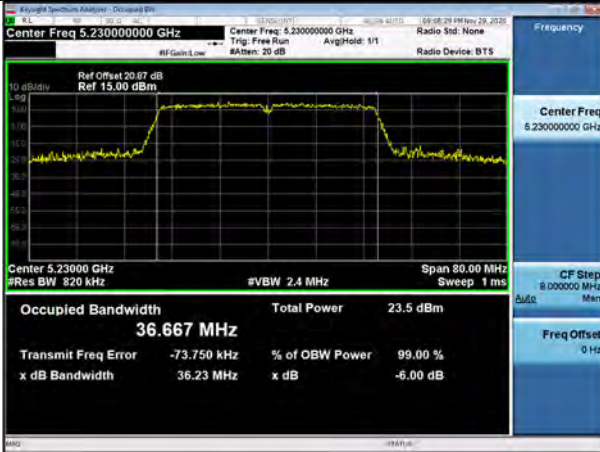

802.11ac\_VHT40 UNII 2A (CH 54)

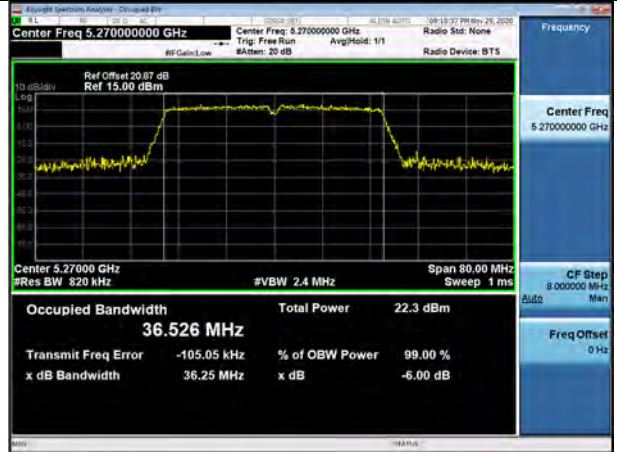

802.11ac\_VHT40 UNII 2C (CH 142)



802.11ac\_VHT40 UNII 3 (CH 159)




▣ Test Plots(802.11ac(VHT80))


Note:

In order to simplify the report, attached plots were only the most narrow channel.


802.11ac\_VHT80 UNII 1 (CH 42)

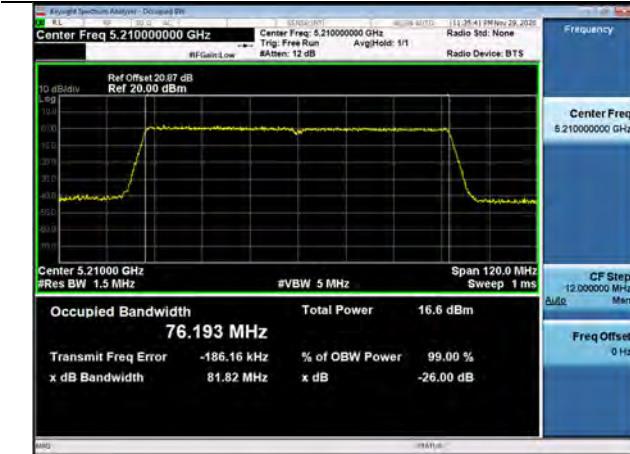

802.11ac\_VHT80 UNII 2A (CH 58)

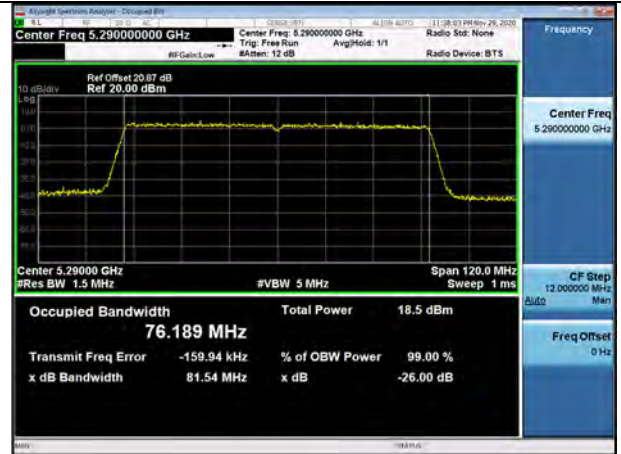

802.11ac\_VHT80 UNII 2C (CH 138)

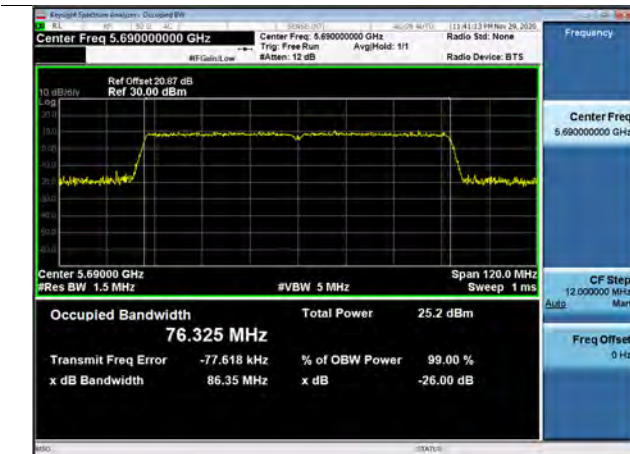

802.11ac\_VHT80 UNII 3 (CH 155)







[ANT2]

▣ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only the most narrow channel.

802.11a UNII 1 (CH 36)



802.11a UNII 2A (CH 64)



802.11a UNII 2C (CH 100)




802.11a UNII 3 (CH 165)



▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only the most narrow channel.

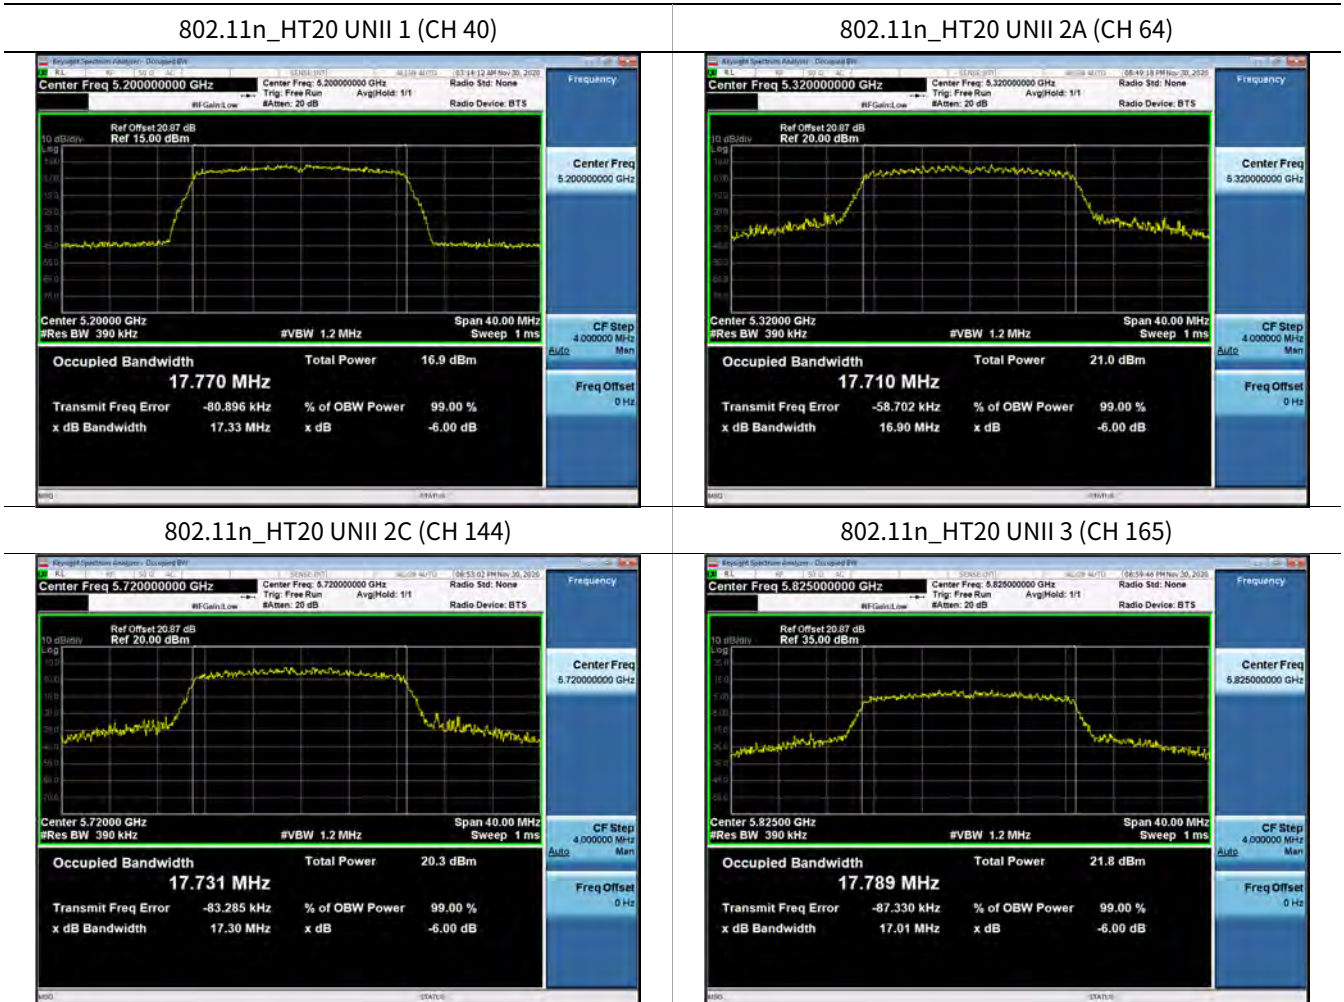




▣ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only the most narrow channel.

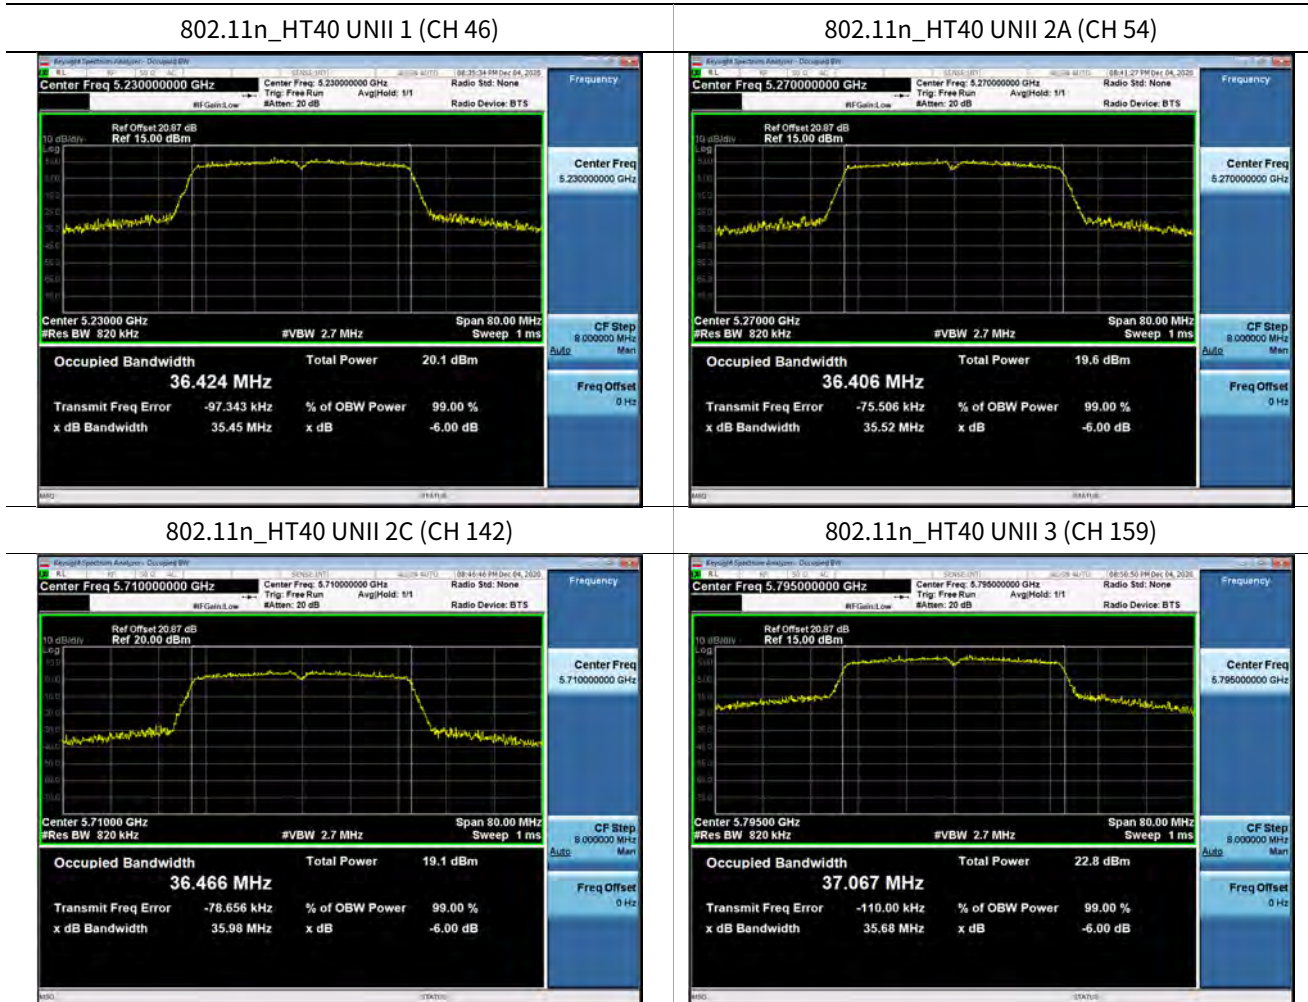






▣ Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only the most narrow channel.

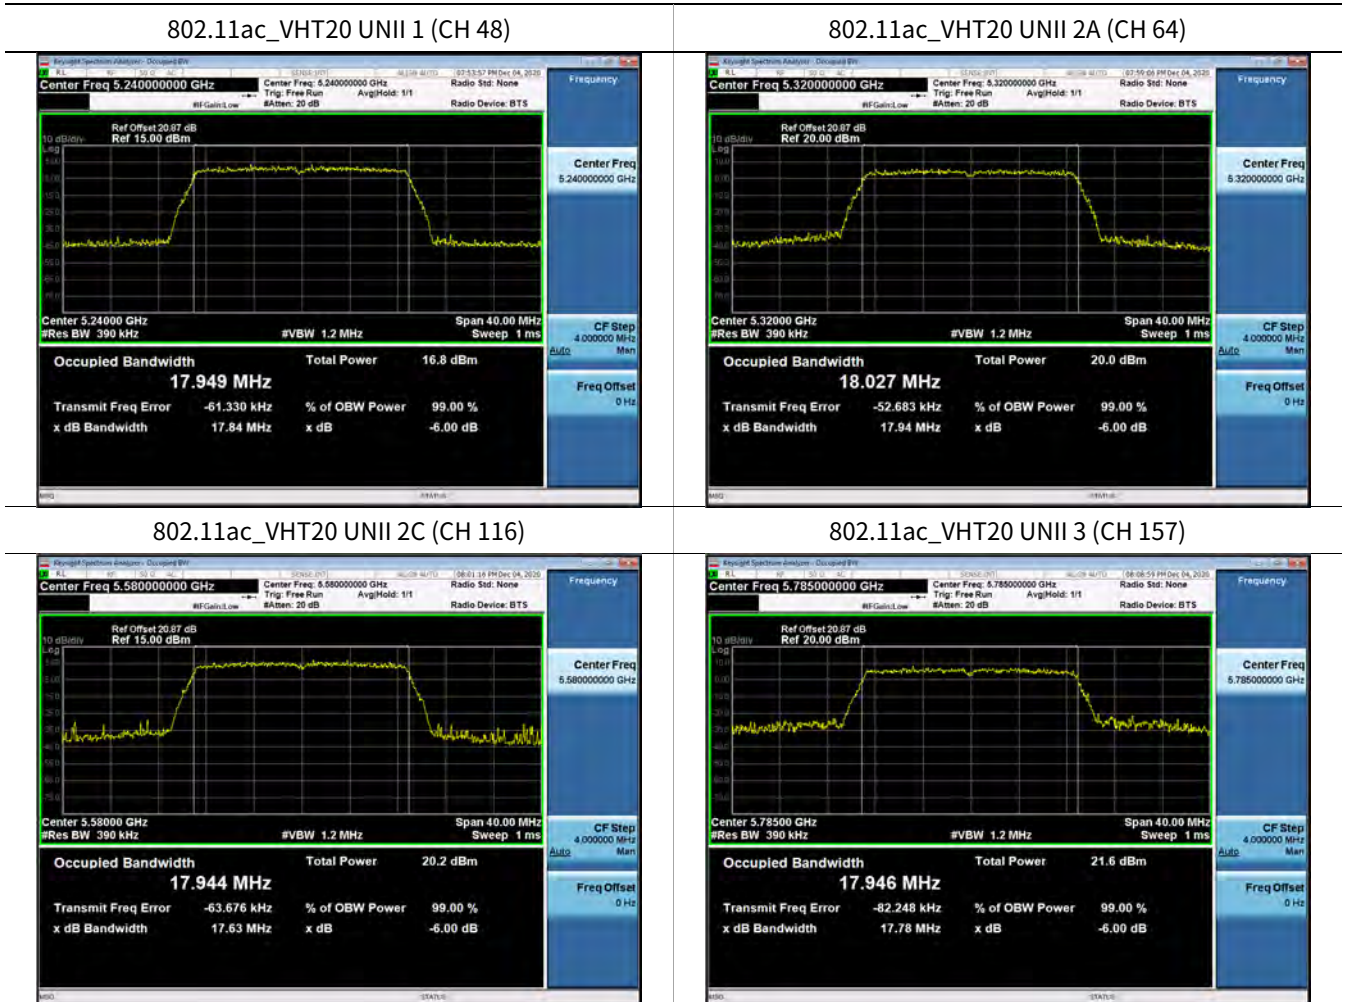






▣ Test Plots(802.11ac(VHT80))


Note:

In order to simplify the report, attached plots were only the most narrow channel.

802.11ac\_VHT80 UNII 1 (CH 42)

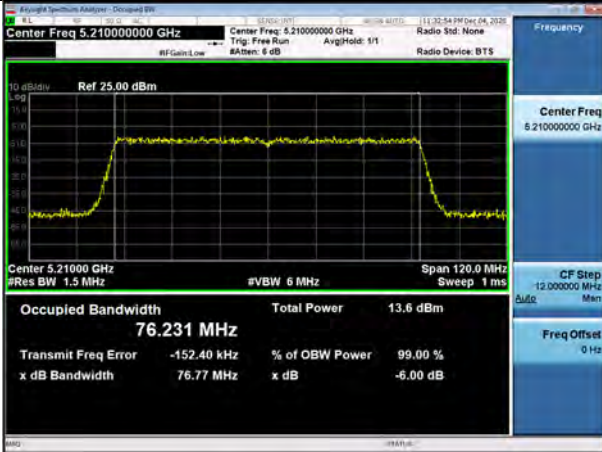

802.11ac\_VHT80 UNII 2A (CH 58)

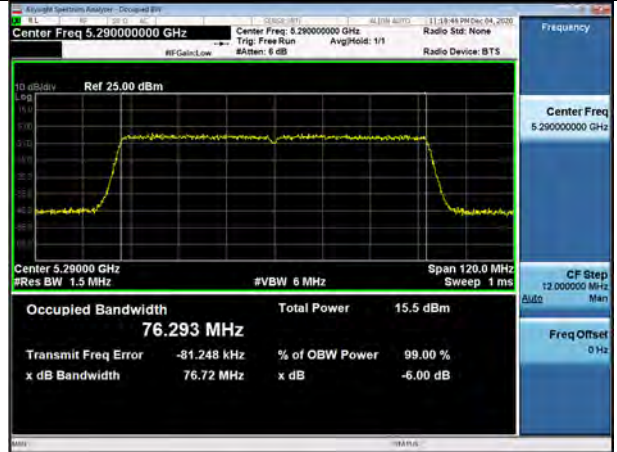

802.11ac\_VHT80 UNII 2C (CH 138)



802.11ac\_VHT80 UNII 3 (CH 155)





### 10.3 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.  
 Straddle channel data were added in section 10.7.3.

[Ant1]

FCC Limts (802.11a, 802.11n\_HT20, 802.11ac\_VHT20)

- UNII-1 : Total Power < 23.98 dBm
- UNII-2A : Total Power < 23.94 dBm
- UNII-2C : Total Power < 23.94 dBm
- UNII-3 : Total Power < 30.00 dBm

FCC Limts (802.11n\_HT40, 802.11ac\_VHT40, 802.11ac\_VHT80)

- UNII-1 : Total Power < 23.98 dBm
- UNII-2A : Total Power < 23.98 dBm
- UNII-2C : Total Power < 23.98 dBm
- UNII-3 : Total Power < 30.00 dBm

ISED Limts (802.11a, 802.11n\_HT20, 802.11ac\_VHT20)

- UNII-1 : E.I.R.P < 22.24 dBm
- UNII-2A : Total Power < 23.23 dBm
- UNII-2A : E.I.R.P < 29.23 dBm
- UNII-2C : Total Power < 23.25 dBm
- UNII-2C : E.I.R.P < 29.25 dBm
- UNII-3 : Total Power < 30.00 dBm

ISED Limts (802.11n\_HT40, 802.11ac\_VHT40, 802.11ac\_VHT80)

- UNII-1 : E.I.R.P < 23.01 dBm
- UNII-2A : Total Power < 23.98 dBm
- UNII-2A : E.I.R.P < 30.00 dBm
- UNII-2C : Total Power < 23.98 dBm
- UNII-2C : E.I.R.P < 30.00 dBm
- UNII-3 : Total Power < 23.98 dBm





| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1       | 5180               | 36             | 6                               | 11.78                    | 1.26                      | 13.04            | 13.5 |
|              | 5200               | 40             | 6                               | 11.90                    | 1.26                      | 13.16            | 13.5 |
|              | 5240               | 48             | 6                               | 12.00                    | 1.26                      | 13.26            | 13.0 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A      | 5260               | 52             | 6                               | 12.91                    | 2.92                      | 15.83            | 13.5 |
|              | 5300               | 60             | 6                               | 13.90                    | 2.92                      | 16.82            | 14.5 |
|              | 5320               | 64             | 6                               | 15.68                    | 2.92                      | 18.60            | 16.5 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C      | 5500               | 100            | 6                               | 14.32                    | 3.29                      | 17.61            | 15.0 |
|              | 5580               | 116            | 6                               | 14.29                    | 3.29                      | 17.58            | 15.0 |
|              | 5720               | 144            | 6                               | 14.50                    | 3.29                      | 17.79            | 15.0 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3       | 5745               | 149            | 6                               | 16.90                    | 1.48                      | 18.38            | 17.5 |
|              | 5785               | 157            | 6                               | 17.63                    | 1.48                      | 19.11            | 18.0 |
|              | 5825               | 165            | 6                               | 17.64                    | 1.48                      | 19.12            | 18.5 |



| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1       | 5180               | 36             | MCS5                            | 12.74                    | 1.26                      | 14.00            | 14.0 |
|              | 5200               | 40             | MCS5                            | 11.66                    | 1.26                      | 12.92            | 13.5 |
|              | 5240               | 48             | MCS5                            | 11.81                    | 1.26                      | 13.07            | 13.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A      | 5260               | 52             | MCS5                            | 13.52                    | 2.92                      | 16.44            | 14.5 |
|              | 5300               | 60             | MCS5                            | 14.16                    | 2.92                      | 17.08            | 15.0 |
|              | 5320               | 64             | MCS5                            | 16.21                    | 2.92                      | 19.13            | 17.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C      | 5500               | 100            | MCS5                            | 14.55                    | 3.29                      | 17.84            | 15.5 |
|              | 5580               | 116            | MCS5                            | 15.29                    | 3.29                      | 18.58            | 16.0 |
|              | 5720               | 144            | MCS5                            | 15.73                    | 3.29                      | 19.02            | 16.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3       | 5745               | 149            | MCS5                            | 16.09                    | 1.48                      | 17.57            | 17.0 |
|              | 5785               | 157            | MCS5                            | 17.14                    | 1.48                      | 18.62            | 17.5 |
|              | 5825               | 165            | MCS5                            | 17.58                    | 1.48                      | 19.06            | 18.5 |



| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|---------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1        | 5180               | 36             | MCS8                            | 11.70                    | 1.26                      | 12.96            | 13.5 |
|               | 5200               | 40             | MCS8                            | 11.70                    | 1.26                      | 12.96            | 13.5 |
|               | 5240               | 48             | MCS8                            | 11.93                    | 1.26                      | 13.19            | 13.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|---------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A       | 5260               | 52             | MCS8                            | 13.67                    | 2.92                      | 16.59            | 14.5 |
|               | 5300               | 60             | MCS8                            | 14.43                    | 2.92                      | 17.35            | 15.0 |
|               | 5320               | 64             | MCS8                            | 15.25                    | 2.92                      | 18.17            | 16.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|---------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C       | 5500               | 100            | MCS8                            | 15.25                    | 3.29                      | 18.54            | 16.0 |
|               | 5580               | 116            | MCS8                            | 14.46                    | 3.29                      | 17.75            | 15.5 |
|               | 5720               | 144            | MCS8                            | 15.70                    | 3.29                      | 18.99            | 16.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|---------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3        | 5745               | 149            | MCS8                            | 16.61                    | 1.48                      | 18.09            | 17.0 |
|               | 5785               | 157            | MCS8                            | 16.72                    | 1.48                      | 18.20            | 17.5 |
|               | 5825               | 165            | MCS8                            | 17.38                    | 1.48                      | 18.86            | 18.0 |



| 802.11n(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1               | 5190               | 38             | MCS2                            | 11.26                    | 1.26                      | 12.52            | 12.5 |
|                      | 5230               | 46             | MCS2                            | 15.27                    | 1.26                      | 16.53            | 16.5 |

| 802.11n(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A              | 5270               | 54             | MCS2                            | 15.12                    | 2.92                      | 18.04            | 16.0 |
|                      | 5310               | 62             | MCS2                            | 11.96                    | 2.92                      | 14.88            | 12.5 |

| 802.11n(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C              | 5510               | 102            | MCS2                            | 11.20                    | 3.29                      | 14.49            | 12.0 |
|                      | 5550               | 110            | MCS2                            | 14.53                    | 3.29                      | 17.82            | 15.5 |
|                      | 5710               | 142            | MCS2                            | 15.34                    | 3.29                      | 18.63            | 15.5 |

| 802.11n(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3               | 5755               | 151            | MCS2                            | 17.23                    | 1.48                      | 18.71            | 17.5 |
|                      | 5795               | 159            | MCS2                            | 18.99                    | 1.48                      | 20.47            | 19.5 |



| 802.11ac(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|-----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                  | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1                | 5190               | 38             | MCS8                            | 11.05                    | 1.26                      | 12.31            | 14.5 |
|                       | 5230               | 46             | MCS8                            | 15.51                    | 1.26                      | 16.77            | 18.5 |

| 802.11ac(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|-----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                  | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A               | 5270               | 54             | MCS8                            | 14.93                    | 2.92                      | 17.85            | 17.0 |
|                       | 5310               | 62             | MCS8                            | 11.48                    | 2.92                      | 14.40            | 13.5 |

| 802.11ac(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|-----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                  | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C               | 5510               | 102            | MCS8                            | 9.33                     | 3.29                      | 12.62            | 11.5 |
|                       | 5550               | 110            | MCS8                            | 14.17                    | 3.29                      | 17.46            | 16.5 |
|                       | 5710               | 142            | MCS8                            | 15.53                    | 3.29                      | 18.82            | 17.0 |

| 802.11ac(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|-----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                  | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3                | 5755               | 151            | MCS8                            | 16.94                    | 1.48                      | 18.42            | 19.0 |
|                       | 5795               | 159            | MCS8                            | 18.99                    | 1.48                      | 20.47            | 21.0 |



| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1               | 5210               | 42             | 78                              | 8.38                     | 1.26                      | 9.64             | 11.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A              | 5290               | 58             | 78                              | 9.28                     | 2.92                      | 12.20            | 12.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C              | 5530               | 106            | 78                              | 10.09                    | 3.29                      | 13.38            | 13.0 |
|                      | 5690               | 138            | 78                              | 15.62                    | 3.29                      | 18.91            | 19.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant1<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3               | 5775               | 155            | 78                              | 19.06                    | 1.48                      | 20.54            | 21.0 |

[Ant2]

FCC Limts (802.11a, 802.11n\_HT20, 802.11ac\_VHT20)

- UNII-1 : Total Power < 23.98 dBm
- UNII-2A : Total Power < 23.96 dBm
- UNII-2C : Total Power < 23.95 dBm
- UNII-3 : Total Power < 30.00 dBm

FCC Limts (802.11n\_HT40, 802.11ac\_VHT40, 802.11ac\_VHT80)

- UNII-1 : Total Power < 23.98 dBm
- UNII-2A : Total Power < 23.98 dBm
- UNII-2C : Total Power < 23.98 dBm
- UNII-3 : Total Power < 30.00 dBm

ISED Limts (802.11a, 802.11n\_HT20, 802.11ac\_VHT20)

- UNII-1 : E.I.R.P < 22.19 dBm
- UNII-2A : Total Power < 23.20 dBm
- UNII-2A : E.I.R.P < 29.20 dBm
- UNII-2C : Total Power < 23.20 dBm
- UNII-2C : E.I.R.P < 29.20 dBm
- UNII-3 : Total Power < 30.00 dBm

ISED Limts (802.11n\_HT40, 802.11ac\_VHT40, 802.11ac\_VHT80)

- UNII-1 : E.I.R.P < 23.01 dBm
- UNII-2A : Total Power < 23.98 dBm
- UNII-2A : E.I.R.P < 30.00 dBm
- UNII-2C : Total Power < 23.98 dBm
- UNII-2C : E.I.R.P < 30.00 dBm
- UNII-3 : Total Power < 23.98 dBm





| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1       | 5180               | 36             | 6                               | 10.45                    | 1.83                      | 12.28            | 13.5 |
|              | 5200               | 40             | 6                               | 10.56                    | 1.83                      | 12.39            | 13.5 |
|              | 5240               | 48             | 6                               | 10.77                    | 1.83                      | 10.77            | 13.0 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A      | 5260               | 52             | 6                               | 10.58                    | 1.83                      | 12.41            | 13.5 |
|              | 5300               | 60             | 6                               | 11.63                    | 1.83                      | 13.46            | 14.5 |
|              | 5320               | 64             | 6                               | 13.68                    | 1.83                      | 15.51            | 16.5 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C      | 5500               | 100            | 6                               | 12.26                    | 1.84                      | 14.10            | 15.0 |
|              | 5580               | 116            | 6                               | 13.31                    | 1.84                      | 15.15            | 15.0 |
|              | 5720               | 144            | 6                               | 12.49                    | 1.84                      | 14.33            | 15.0 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3       | 5745               | 149            | 6                               | 14.41                    | 1.68                      | 16.09            | 17.5 |
|              | 5785               | 157            | 6                               | 15.02                    | 1.68                      | 16.70            | 18.0 |
|              | 5825               | 165            | 6                               | 15.08                    | 1.68                      | 16.76            | 18.5 |



| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1       | 5180               | 36             | MCS5                            | 10.16                    | 1.83                      | 11.99            | 14.0 |
|              | 5200               | 40             | MCS5                            | 10.42                    | 1.83                      | 12.25            | 13.5 |
|              | 5240               | 48             | MCS5                            | 10.35                    | 1.83                      | 10.35            | 13.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A      | 5260               | 52             | MCS5                            | 11.62                    | 1.83                      | 13.45            | 14.5 |
|              | 5300               | 60             | MCS5                            | 12.52                    | 1.83                      | 14.35            | 15.0 |
|              | 5320               | 64             | MCS5                            | 14.77                    | 1.83                      | 16.60            | 17.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C      | 5500               | 100            | MCS5                            | 12.86                    | 1.84                      | 14.70            | 15.5 |
|              | 5580               | 116            | MCS5                            | 14.63                    | 1.84                      | 16.47            | 16.0 |
|              | 5720               | 144            | MCS5                            | 13.84                    | 1.84                      | 15.68            | 16.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|--------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3       | 5745               | 149            | MCS5                            | 14.62                    | 1.68                      | 16.30            | 17.0 |
|              | 5785               | 157            | MCS5                            | 15.05                    | 1.68                      | 16.73            | 17.5 |
|              | 5825               | 165            | MCS5                            | 15.85                    | 1.68                      | 17.53            | 18.5 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|---------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1        | 5180               | 36             | MCS8                            | 10.66                    | 1.83                      | 12.49            | 13.5 |
|               | 5200               | 40             | MCS8                            | 10.60                    | 1.83                      | 12.43            | 13.5 |
|               | 5240               | 48             | MCS8                            | 10.52                    | 1.83                      | 12.35            | 13.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|---------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A       | 5260               | 52             | MCS8                            | 11.89                    | 1.83                      | 13.72            | 14.5 |
|               | 5300               | 60             | MCS8                            | 12.71                    | 1.83                      | 14.54            | 15.0 |
|               | 5320               | 64             | MCS8                            | 13.34                    | 1.83                      | 15.17            | 16.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|---------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C       | 5500               | 100            | MCS8                            | 13.67                    | 1.84                      | 15.51            | 16.0 |
|               | 5580               | 116            | MCS8                            | 14.08                    | 1.84                      | 15.92            | 15.5 |
|               | 5720               | 144            | MCS8                            | 13.99                    | 1.84                      | 15.83            | 16.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|---------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3        | 5745               | 149            | MCS8                            | 14.54                    | 1.68                      | 16.22            | 17.0 |
|               | 5785               | 157            | MCS8                            | 15.19                    | 1.68                      | 16.87            | 17.5 |
|               | 5825               | 165            | MCS8                            | 15.68                    | 1.68                      | 17.36            | 18.0 |



| 802.11n(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1               | 5190               | 38             | MCS2                            | 9.58                     | 1.83                      | 11.41            | 12.5 |
|                      | 5230               | 46             | MCS2                            | 13.88                    | 1.83                      | 1.83             | 16.5 |

| 802.11n(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A              | 5270               | 54             | MCS2                            | 13.12                    | 1.83                      | 14.95            | 16.0 |
|                      | 5310               | 62             | MCS2                            | 9.08                     | 1.83                      | 10.91            | 12.5 |

| 802.11n(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C              | 5510               | 102            | MCS2                            | 9.04                     | 1.84                      | 10.88            | 12.0 |
|                      | 5550               | 110            | MCS2                            | 13.10                    | 1.84                      | 14.94            | 15.5 |
|                      | 5710               | 142            | MCS2                            | 12.78                    | 1.84                      | 14.62            | 15.5 |

| 802.11n(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3               | 5755               | 151            | MCS2                            | 13.99                    | 1.68                      | 15.67            | 17.5 |
|                      | 5795               | 159            | MCS2                            | 16.67                    | 1.68                      | 18.35            | 19.5 |



| 802.11ac(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|-----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                  | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1                | 5190               | 38             | MCS8                            | 9.69                     | 1.83                      | 11.52            | 14.5 |
|                       | 5230               | 46             | MCS8                            | 14.05                    | 1.83                      | 15.88            | 18.5 |

| 802.11ac(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|-----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                  | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A               | 5270               | 54             | MCS8                            | 12.73                    | 1.83                      | 14.56            | 17.0 |
|                       | 5310               | 62             | MCS8                            | 9.52                     | 1.83                      | 11.35            | 13.5 |

| 802.11ac(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|-----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                  | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C               | 5510               | 102            | MCS8                            | 7.36                     | 1.84                      | 9.20             | 11.5 |
|                       | 5550               | 110            | MCS8                            | 13.40                    | 1.84                      | 15.24            | 16.5 |
|                       | 5710               | 142            | MCS8                            | 12.96                    | 1.84                      | 14.80            | 17.0 |

| 802.11ac(40 MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|-----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                  | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3                | 5755               | 151            | MCS8                            | 15.20                    | 1.68                      | 16.88            | 19.0 |
|                       | 5795               | 159            | MCS8                            | 16.98                    | 1.68                      | 18.66            | 21.0 |



| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 1               | 5210               | 42             | 78                              | 6.11                     | 1.83                      | 7.94             | 11.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2A              | 5290               | 58             | 78                              | 7.6                      | 1.83                      | 9.43             | 12.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 2C              | 5530               | 106            | 78                              | 9.74                     | 1.84                      | 11.58            | 13.0 |
|                      | 5690               | 138            | 78                              | 16.08                    | 1.84                      | 17.92            | 19.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | SISO Measured Power(dBm) |                           |                  |      |
|----------------------|--------------------|----------------|---------------------------------|--------------------------|---------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | Ant2<br>Power<br>(dBm)   | Peak Ant<br>Gain<br>(dBi) | E.I.R.P<br>(dBm) | PLS  |
| UNII 3               | 5775               | 155            | 78                              | 17.14                    | 1.68                      | 18.82            | 21.0 |



[MIMO]

FCC Limts (802.11a, 802.11n\_HT20, 802.11ac\_VHT20)

- UNII-1 : Total Power < 23.98 dBm
- UNII-2A : Total Power < 23.94 dBm
- UNII-2C : Total Power < 23.94 dBm
- UNII-3 : Total Power < 30.00 dBm

FCC Limts (802.11n\_HT40, 802.11ac\_VHT40, 802.11ac\_VHT80)

- UNII-1 : Total Power < 23.98 dBm
- UNII-2A : Total Power < 23.98 dBm
- UNII-2C : Total Power < 23.98 dBm
- UNII-3 : Total Power < 30.00 dBm

ISED Limts (802.11a, 802.11n\_HT20, 802.11ac\_VHT20)

- UNII-1 : E.I.R.P < 22.19 dBm
- UNII-2A : Total Power < 23.20 dBm
- UNII-2A : E.I.R.P < 29.20 dBm
- UNII-2C : Total Power < 23.20 dBm
- UNII-2C : E.I.R.P < 29.20 dBm
- UNII-3 : Total Power < 30.00 dBm

ISED Limts (802.11n\_HT40, 802.11ac\_VHT40, 802.11ac\_VHT80)

- UNII-1 : E.I.R.P < 23.01 dBm
- UNII-2A : Total Power < 23.98 dBm
- UNII-2A : E.I.R.P < 30.00 dBm
- UNII-2C : Total Power < 23.98 dBm
- UNII-2C : E.I.R.P < 30.00 dBm
- UNII-3 : Total Power < 23.98 dBm





| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 1       | 5180               | 36             | 6                               | 26.16                        | 14.18                 | 4.56                             | 18.74            | 13.5 |
|              | 5200               | 40             | 6                               | 26.86                        | 14.29                 | 4.56                             | 18.85            | 13.5 |
|              | 5240               | 48             | 6                               | 27.79                        | 14.44                 | 4.56                             | 19.00            | 13.0 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2A      | 5260               | 52             | 6                               | 30.96                        | 14.91                 | 5.40                             | 20.31            | 13.5 |
|              | 5300               | 60             | 6                               | 39.11                        | 15.92                 | 5.40                             | 21.33            | 14.5 |
|              | 5320               | 64             | 6                               | 60.33                        | 17.81                 | 5.40                             | 23.21            | 16.5 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2C      | 5500               | 100            | 6                               | 43.86                        | 16.42                 | 5.61                             | 22.03            | 15.0 |
|              | 5580               | 116            | 6                               | 48.27                        | 16.84                 | 5.61                             | 22.44            | 15.0 |
|              | 5720               | 144            | 6                               | 45.91                        | 16.62                 | 5.61                             | 22.23            | 15.0 |

| 802.11a Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 3       | 5745               | 149            | 6                               | 76.60                        | 18.84                 | 4.59                             | 23.43            | 17.5 |
|              | 5785               | 157            | 6                               | 89.73                        | 19.53                 | 4.59                             | 24.12            | 18.0 |
|              | 5825               | 165            | 6                               | 90.27                        | 19.56                 | 4.59                             | 24.15            | 18.5 |



| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 1       | 5180               | 36             | MCS5                            | 29.18                        | 14.65                 | 4.56                             | 19.21            | 14.0 |
|              | 5200               | 40             | MCS5                            | 25.66                        | 14.09                 | 4.56                             | 18.65            | 13.5 |
|              | 5240               | 48             | MCS5                            | 26.01                        | 14.15                 | 4.56                             | 18.71            | 13.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2A      | 5260               | 52             | MCS5                            | 37.00                        | 15.68                 | 5.40                             | 21.08            | 14.5 |
|              | 5300               | 60             | MCS5                            | 43.94                        | 16.43                 | 5.40                             | 21.83            | 15.0 |
|              | 5320               | 64             | MCS5                            | 71.78                        | 18.56                 | 5.40                             | 23.96            | 17.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2C      | 5500               | 100            | MCS5                            | 47.84                        | 16.80                 | 5.61                             | 22.40            | 15.5 |
|              | 5580               | 116            | MCS5                            | 62.85                        | 17.98                 | 5.61                             | 23.59            | 16.0 |
|              | 5720               | 144            | MCS5                            | 61.64                        | 17.90                 | 5.61                             | 23.50            | 16.0 |

| 802.11n Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band         | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 3       | 5745               | 149            | MCS5                            | 69.65                        | 18.43                 | 4.59                             | 23.02            | 17.0 |
|              | 5785               | 157            | MCS5                            | 83.76                        | 19.23                 | 4.59                             | 23.82            | 17.5 |
|              | 5825               | 165            | MCS5                            | 95.70                        | 19.81                 | 4.59                             | 24.40            | 18.5 |



| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|---------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 1        | 5180               | 36             | MCS8                            | 26.44                        | 14.22                 | 4.56                             | 18.78            | 13.5 |
|               | 5200               | 40             | MCS8                            | 26.26                        | 14.19                 | 4.56                             | 18.75            | 13.5 |
|               | 5240               | 48             | MCS8                            | 26.87                        | 14.29                 | 4.56                             | 18.85            | 13.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|---------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2A       | 5260               | 52             | MCS8                            | 38.74                        | 15.88                 | 5.40                             | 21.28            | 14.5 |
|               | 5300               | 60             | MCS8                            | 46.39                        | 16.66                 | 5.40                             | 22.07            | 15.0 |
|               | 5320               | 64             | MCS8                            | 55.06                        | 17.41                 | 5.40                             | 22.81            | 16.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|---------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2C       | 5500               | 100            | MCS8                            | 56.77                        | 17.54                 | 5.61                             | 23.15            | 16.0 |
|               | 5580               | 116            | MCS8                            | 53.49                        | 17.28                 | 5.61                             | 22.89            | 15.5 |
|               | 5720               | 144            | MCS8                            | 62.22                        | 17.94                 | 5.61                             | 23.54            | 16.0 |

| 802.11ac Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|---------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band          | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 3        | 5745               | 149            | MCS8                            | 74.25                        | 18.71                 | 4.59                             | 23.30            | 17.0 |
|               | 5785               | 157            | MCS8                            | 79.99                        | 19.03                 | 4.59                             | 23.62            | 17.5 |
|               | 5825               | 165            | MCS8                            | 91.68                        | 4.59                  | 4.59                             | 9.18             | 18.0 |



| 802.11n(40MHz) Mode |                 |             | Worstcase | MIMO Total Power (dBm) (CDD) |       |                 |                            | PLS  |
|---------------------|-----------------|-------------|-----------|------------------------------|-------|-----------------|----------------------------|------|
| Band                | Frequency [MHz] | Channel No. |           | Datarate (Mbps)              | mW    | SUM Power (dBm) | Directional Ant Gain (dBi) |      |
| UNII 1              | 5190            | 38          | MCS2      | 22.45                        | 13.51 | 4.56            | 18.07                      | 12.5 |
|                     | 5230            | 46          | MCS2      | 58.08                        | 17.64 | 4.56            | 22.20                      | 16.5 |

| 802.11n(40MHz) Mode |                 |             | Worstcase | MIMO Total Power (dBm) (CDD) |       |                 |                            | PLS  |
|---------------------|-----------------|-------------|-----------|------------------------------|-------|-----------------|----------------------------|------|
| Band                | Frequency [MHz] | Channel No. |           | Datarate (Mbps)              | mW    | SUM Power (dBm) | Directional Ant Gain (dBi) |      |
| UNII 2A             | 5270            | 54          | MCS2      | 53.00                        | 17.24 | 5.40            | 22.65                      | 16.0 |
|                     | 5310            | 62          | MCS2      | 23.80                        | 13.77 | 5.40            | 19.17                      | 12.5 |

| 802.11n(40MHz) Mode |                 |             | Worstcase | MIMO Total Power (dBm) (CDD) |       |                 |                            | PLS  |
|---------------------|-----------------|-------------|-----------|------------------------------|-------|-----------------|----------------------------|------|
| Band                | Frequency [MHz] | Channel No. |           | Datarate (Mbps)              | mW    | SUM Power (dBm) | Directional Ant Gain (dBi) |      |
| UNII 2C             | 5510            | 102         | MCS2      | 21.21                        | 13.26 | 5.40            | 18.67                      | 12.0 |
|                     | 5550            | 110         | MCS2      | 48.81                        | 16.89 | 5.40            | 22.29                      | 15.5 |
|                     | 5710            | 142         | MCS2      | 53.17                        | 17.26 | 5.40            | 22.66                      | 15.5 |

| 802.11n(40MHz) Mode |                 |             | Worstcase | MIMO Total Power (dBm) (CDD) |       |                 |                            | PLS  |
|---------------------|-----------------|-------------|-----------|------------------------------|-------|-----------------|----------------------------|------|
| Band                | Frequency [MHz] | Channel No. |           | Datarate (Mbps)              | mW    | SUM Power (dBm) | Directional Ant Gain (dBi) |      |
| UNII 3              | 5755            | 151         | MCS2      | 77.91                        | 18.92 | 0.00            | 18.92                      | 17.5 |
|                     | 5795            | 159         | MCS2      | 125.70                       | 20.99 | 0.00            | 20.99                      | 19.5 |



| 802.11ac(40MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|----------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 1               | 5190               | 38             | MCS8                            | 22.03                        | 13.43                 | 4.56                             | 17.99            | 14.5 |
|                      | 5230               | 46             | MCS8                            | 60.94                        | 17.85                 | 4.56                             | 22.41            | 18.5 |

| 802.11ac(40MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|----------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2A              | 5270               | 54             | MCS8                            | 49.87                        | 16.98                 | 5.40                             | 22.38            | 17.0 |
|                      | 5310               | 62             | MCS8                            | 23.01                        | 13.62                 | 5.40                             | 19.02            | 13.5 |

| 802.11ac(40MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|----------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2C              | 5510               | 102            | MCS8                            | 14.02                        | 11.47                 | 5.61                             | 17.07            | 11.5 |
|                      | 5550               | 110            | MCS8                            | 48.02                        | 16.81                 | 5.61                             | 22.42            | 16.5 |
|                      | 5710               | 142            | MCS8                            | 55.52                        | 17.44                 | 5.61                             | 23.05            | 17.0 |

| 802.11ac(40MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|----------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 3               | 5755               | 151            | MCS8                            | 82.57                        | 19.17                 | 4.59                             | 23.76            | 19.0 |
|                      | 5795               | 159            | MCS8                            | 129.13                       | 21.11                 | 4.59                             | 25.70            | 21.0 |



| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|----------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 1               | 5210               | 42             | 78                              | 10.97                        | 10.40                 | 4.56                             | 14.96            | 11.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|----------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2A              | 5290               | 58             | 78                              | 14.23                        | 11.53                 | 5.40                             | 16.93            | 12.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|----------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 2C              | 5530               | 106            | 78                              | 19.63                        | 12.93                 | 5.61                             | 18.53            | 13.0 |
|                      | 5690               | 138            | 78                              | 77.03                        | 18.87                 | 5.61                             | 24.47            | 19.0 |

| 802.11ac(80MHz) Mode |                    |                | Worstcase<br>Datarate<br>(Mbps) | MIMO Total Power (dBm) (CDD) |                       |                                  |                  | PLS  |
|----------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|------|
| Band                 | Frequency<br>[MHz] | Channel<br>No. |                                 | mW                           | SUM<br>Power<br>(dBm) | Directional<br>Ant Gain<br>(dBi) | E.I.R.P<br>(dBm) |      |
| UNII 3               | 5775               | 155            | 78                              | 132.30                       | 21.22                 | 4.59                             | 25.81            | 21.0 |



### 10.4 POWER SPECTRAL DENSITY

FCC

[Ant1]

| Frequency<br>(MHz) | Channel<br>No. | Mode    | Test Result            |                      |            |
|--------------------|----------------|---------|------------------------|----------------------|------------|
|                    |                |         | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11a | 1.642                  | 2.902                | 11 dBm/MHz |
| 5200               | 40             |         | 1.650                  | 2.910                |            |
| 5240               | 48             |         | 2.197                  | 3.457                |            |
| 5260               | 52             |         | 2.632                  | -                    |            |
| 5300               | 60             |         | 3.398                  | -                    |            |
| 5320               | 64             |         | 5.623                  | -                    |            |
| 5500               | 100            |         | 3.900                  | -                    |            |
| 5580               | 116            |         | 4.075                  | -                    |            |
| 5720               | 144            |         | 6.852                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode    | Test Result               |               |
|--------------------|----------------|---------|---------------------------|---------------|
|                    |                |         | Conducted<br>(dBm/500kHz) | Limit         |
| 5745               | 149            | 802.11a | 4.314                     | 30 dBm/500kHz |
| 5785               | 157            |         | 4.886                     |               |
| 5825               | 165            |         | 4.936                     |               |



| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result            |                      |            |
|--------------------|----------------|---------------------|------------------------|----------------------|------------|
|                    |                |                     | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11n<br>(20 MHz) | 1.490                  | 2.750                | 11 dBm/MHz |
| 5200               | 40             |                     | 1.382                  | 2.642                |            |
| 5240               | 48             |                     | 1.801                  | 3.061                |            |
| 5260               | 52             |                     | 3.302                  | -                    |            |
| 5300               | 60             |                     | 3.975                  | -                    |            |
| 5320               | 64             |                     | 5.497                  | -                    |            |
| 5500               | 100            |                     | 4.101                  | -                    |            |
| 5580               | 116            |                     | 5.063                  | -                    |            |
| 5720               | 144            |                     | 5.382                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result               |               |
|--------------------|----------------|---------------------|---------------------------|---------------|
|                    |                |                     | Conducted<br>(dBm/500kHz) | Limit         |
| 5745               | 149            | 802.11n<br>(20 MHz) | 3.885                     | 30 dBm/500kHz |
| 5785               | 157            |                     | 4.164                     |               |
| 5825               | 165            |                     | 4.753                     |               |





| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result            |                      |            |
|--------------------|----------------|---------------------|------------------------|----------------------|------------|
|                    |                |                     | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5190               | 38             | 802.11n<br>(40 MHz) | -3.314                 | -2.054               | 11 dBm/MHz |
| 5230               | 46             |                     | 2.002                  | 3.262                |            |
| 5270               | 54             |                     | 1.601                  | -                    |            |
| 5310               | 62             |                     | -1.564                 | -                    |            |
| 5510               | 102            |                     | -2.247                 | -                    |            |
| 5500               | 110            |                     | 0.868                  | -                    |            |
| 5710               | 142            |                     | 1.817                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result               |               |
|--------------------|----------------|---------------------|---------------------------|---------------|
|                    |                |                     | Conducted<br>(dBm/500kHz) | Limit         |
| 5755               | 151            | 802.11n<br>(40 MHz) | 0.805                     | 30 dBm/500kHz |
| 5795               | 159            |                     | 3.473                     |               |



| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11ac<br>(20 MHz) | 1.175                  | 2.435                | 11 dBm/MHz |
| 5200               | 40             |                      | 1.507                  | 2.767                |            |
| 5240               | 48             |                      | 1.298                  | 2.558                |            |
| 5260               | 52             |                      | 2.746                  | -                    |            |
| 5300               | 60             |                      | 3.313                  | -                    |            |
| 5320               | 64             |                      | 4.365                  | -                    |            |
| 5500               | 100            |                      | 4.426                  | -                    |            |
| 5580               | 116            |                      | 4.175                  | -                    |            |
| 5720               | 144            |                      | 5.126                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result               |              |
|--------------------|----------------|----------------------|---------------------------|--------------|
|                    |                |                      | Conducted<br>(dBm/500kHz) | Limit        |
| 5745               | 149            | 802.11ac<br>(20 MHz) | 3.198                     | 30 Bm/500kHz |
| 5785               | 157            |                      | 3.565                     |              |
| 5825               | 165            |                      | 3.664                     |              |



| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5190               | 38             | 802.11ac<br>(40 MHz) | -3.303                 | -2.043               | 11 dBm/MHz |
| 5230               | 46             |                      | 1.940                  | 3.200                |            |
| 5270               | 54             |                      | 1.002                  | -                    |            |
| 5310               | 62             |                      | -2.628                 | -                    |            |
| 5510               | 102            |                      | -4.744                 | -                    |            |
| 5500               | 110            |                      | 0.114                  | -                    |            |
| 5710               | 142            |                      | 1.690                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result               |               |
|--------------------|----------------|----------------------|---------------------------|---------------|
|                    |                |                      | Conducted<br>(dBm/500kHz) | Limit         |
| 5755               | 151            | 802.11ac<br>(40 MHz) | 1.104                     | 30 dBm/500kHz |
| 5795               | 159            |                      | 3.449                     |               |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5210               | 42             | 802.11ac<br>(80 MHz) | -9.111                 | -7.281               | 11 dBm/MHz |
| 5290               | 58             |                      | -7.215                 | -                    |            |
| 5530               | 106            |                      | -6.439                 | -                    |            |
| 5690               | 138            |                      | -1.087                 | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result               |               |
|--------------------|----------------|----------------------|---------------------------|---------------|
|                    |                |                      | Conducted<br>(dBm/500kHz) | Limit         |
| 5775               | 155            | 802.11ac<br>(80 MHz) | -0.363                    | 30 dBm/500kHz |



[Ant2]

| Frequency<br>(MHz) | Channel<br>No. | Mode    | Test Result            |                      |            |
|--------------------|----------------|---------|------------------------|----------------------|------------|
|                    |                |         | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11a | 0.610                  | 2.440                | 11 dBm/MHz |
| 5200               | 40             |         | 0.642                  | 2.472                |            |
| 5240               | 48             |         | 0.632                  | 2.462                |            |
| 5260               | 52             |         | 0.997                  | -                    |            |
| 5300               | 60             |         | 2.280                  | -                    |            |
| 5320               | 64             |         | 4.260                  | -                    |            |
| 5500               | 100            |         | 3.042                  | -                    |            |
| 5580               | 116            |         | 3.860                  | -                    |            |
| 5720               | 144            |         | 3.262                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode    | Test Result               |               |
|--------------------|----------------|---------|---------------------------|---------------|
|                    |                |         | Conducted<br>(dBm/500kHz) | Limit         |
| 5745               | 149            | 802.11a | 2.939                     | 30 dBm/500kHz |
| 5785               | 157            |         | 3.480                     |               |
| 5825               | 165            |         | 3.339                     |               |



| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result            |                      |            |
|--------------------|----------------|---------------------|------------------------|----------------------|------------|
|                    |                |                     | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11n<br>(20 MHz) | 0.706                  | 2.536                | 11 dBm/MHz |
| 5200               | 40             |                     | 0.312                  | 2.142                |            |
| 5240               | 48             |                     | 0.117                  | 1.947                |            |
| 5260               | 52             |                     | 0.945                  | -                    |            |
| 5300               | 60             |                     | 2.258                  | -                    |            |
| 5320               | 64             |                     | 4.378                  | -                    |            |
| 5500               | 100            |                     | 2.426                  | -                    |            |
| 5580               | 116            |                     | 4.257                  | -                    |            |
| 5720               | 144            |                     | 3.802                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result               |               |
|--------------------|----------------|---------------------|---------------------------|---------------|
|                    |                |                     | Conducted<br>(dBm/500kHz) | Limit         |
| 5745               | 149            | 802.11n<br>(20 MHz) | 1.951                     | 30 dBm/500kHz |
| 5785               | 157            |                     | 2.191                     |               |
| 5825               | 165            |                     | 3.003                     |               |



| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result            |                      |            |
|--------------------|----------------|---------------------|------------------------|----------------------|------------|
|                    |                |                     | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5190               | 38             | 802.11n<br>(40 MHz) | -4.495                 | -3.235               | 11 dBm/MHz |
| 5230               | 46             |                     | 0.140                  | 1.400                |            |
| 5270               | 54             |                     | -0.729                 | -                    |            |
| 5310               | 62             |                     | -4.703                 | -                    |            |
| 5510               | 102            |                     | -4.639                 | -                    |            |
| 5500               | 110            |                     | -0.399                 | -                    |            |
| 5710               | 142            |                     | -1.094                 | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result               |               |
|--------------------|----------------|---------------------|---------------------------|---------------|
|                    |                |                     | Conducted<br>(dBm/500kHz) | Limit         |
| 5755               | 151            | 802.11n<br>(40 MHz) | -1.858                    | 30 dBm/500kHz |
| 5795               | 159            |                     | 0.072                     |               |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11ac<br>(20 MHz) | -0.552                 | 0.708                | 11 dBm/MHz |
| 5200               | 40             |                      | -0.530                 | 0.730                |            |
| 5240               | 48             |                      | -0.692                 | 0.568                |            |
| 5260               | 52             |                      | 0.884                  | -                    |            |
| 5300               | 60             |                      | 1.399                  | -                    |            |
| 5320               | 64             |                      | 2.448                  | -                    |            |
| 5500               | 100            |                      | 2.373                  | -                    |            |
| 5580               | 116            |                      | 2.506                  | -                    |            |
| 5720               | 144            |                      | 2.595                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result               |               |
|--------------------|----------------|----------------------|---------------------------|---------------|
|                    |                |                      | Conducted<br>(dBm/500kHz) | Limit         |
| 5745               | 149            | 802.11ac<br>(20 MHz) | 0.712                     | 30 dBm/500kHz |
| 5785               | 157            |                      | 1.156                     |               |
| 5825               | 165            |                      | 1.738                     |               |





| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5190               | 38             | 802.11ac<br>(40 MHz) | -4.629                 | -2.799               | 11 dBm/MHz |
| 5230               | 46             |                      | 0.027                  | 1.857                |            |
| 5270               | 54             |                      | -1.559                 | -                    |            |
| 5310               | 62             |                      | -5.062                 | -                    |            |
| 5510               | 102            |                      | -6.594                 | -                    |            |
| 5500               | 110            |                      | -1.045                 | -                    |            |
| 5710               | 142            |                      | -1.068                 | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode     | Test Result               |               |
|--------------------|----------------|----------|---------------------------|---------------|
|                    |                |          | Conducted<br>(dBm/500kHz) | Limit         |
| 5755               | 151            | 802.11ac | -1.975                    | 30 dBm/500kHz |
| 5795               | 159            | (40 MHz) | -0.055                    |               |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5210               | 42             | 802.11ac<br>(80 MHz) | -11.800                | -9.970               | 11 dBm/MHz |
| 5290               | 58             |                      | -9.867                 | -                    |            |
| 5530               | 106            |                      | -8.025                 | -                    |            |
| 5690               | 138            |                      | -1.994                 | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result               |               |
|--------------------|----------------|----------------------|---------------------------|---------------|
|                    |                |                      | Conducted<br>(dBm/500kHz) | Limit         |
| 5775               | 155            | 802.11ac<br>(80 MHz) | -3.100                    | 30 dBm/500kHz |



[MIMO (CDD)]

| Frequency<br>(MHz) | Channel<br>No. | Mode    | Test Result            |                      |            |
|--------------------|----------------|---------|------------------------|----------------------|------------|
|                    |                |         | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11a | 4.152                  | 8.712                | 11 dBm/MHz |
| 5200               | 40             |         | 4.171                  | 8.731                |            |
| 5240               | 48             |         | 4.460                  | 9.020                |            |
| 5260               | 52             |         | 4.863                  | -                    |            |
| 5300               | 60             |         | 5.867                  | -                    |            |
| 5320               | 64             |         | 7.979                  | -                    |            |
| 5500               | 100            |         | 6.492                  | -                    |            |
| 5580               | 116            |         | 6.978                  | -                    |            |
| 5720               | 144            |         | 8.251                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode    | Test Result               |               |
|--------------------|----------------|---------|---------------------------|---------------|
|                    |                |         | Conducted<br>(dBm/500kHz) | Limit         |
| 5745               | 149            | 802.11a | 6.664                     | 30 dBm/500kHz |
| 5785               | 157            |         | 7.222                     |               |
| 5825               | 165            |         | 7.184                     |               |

| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result            |                      |            |
|--------------------|----------------|---------------------|------------------------|----------------------|------------|
|                    |                |                     | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11n<br>(20 MHz) | 4.117                  | 8.677                | 11 dBm/MHz |
| 5200               | 40             |                     | 3.874                  | 8.434                |            |
| 5240               | 48             |                     | 4.010                  | 8.570                |            |
| 5260               | 52             |                     | 5.214                  | -                    |            |
| 5300               | 60             |                     | 6.169                  | -                    |            |
| 5320               | 64             |                     | 7.966                  | -                    |            |
| 5500               | 100            |                     | 6.314                  | -                    |            |
| 5580               | 116            |                     | 7.680                  | -                    |            |
| 5720               | 144            |                     | 7.638                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result               |               |
|--------------------|----------------|---------------------|---------------------------|---------------|
|                    |                |                     | Conducted<br>(dBm/500kHz) | Limit         |
| 5745               | 149            | 802.11n<br>(20 MHz) | 5.982                     | 30 dBm/500kHz |
| 5785               | 157            |                     | 6.244                     |               |
| 5825               | 165            |                     | 6.932                     |               |



| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result            |                      |            |
|--------------------|----------------|---------------------|------------------------|----------------------|------------|
|                    |                |                     | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5190               | 38             | 802.11n<br>(40 MHz) | -0.874                 | 3.686                | 11 dBm/MHz |
| 5230               | 46             |                     | 4.131                  | 8.691                |            |
| 5270               | 54             |                     | 3.524                  | -                    |            |
| 5310               | 62             |                     | 0.018                  | -                    |            |
| 5510               | 102            |                     | -0.351                 | -                    |            |
| 5500               | 110            |                     | 3.268                  | -                    |            |
| 5710               | 142            |                     | 3.493                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                | Test Result               |               |
|--------------------|----------------|---------------------|---------------------------|---------------|
|                    |                |                     | Conducted<br>(dBm/500kHz) | Limit         |
| 5755               | 151            | 802.11n<br>(40 MHz) | 2.585                     | 30 dBm/500kHz |
| 5795               | 159            |                     | 4.948                     |               |



| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5180               | 36             | 802.11ac<br>(20 MHz) | 3.365                  | 7.925                | 11 dBm/MHz |
| 5200               | 40             |                      | 3.558                  | 8.118                |            |
| 5240               | 48             |                      | 3.370                  | 7.930                |            |
| 5260               | 52             |                      | 4.875                  | -                    |            |
| 5300               | 60             |                      | 5.419                  | -                    |            |
| 5320               | 64             |                      | 6.470                  | -                    |            |
| 5500               | 100            |                      | 6.470                  | -                    |            |
| 5580               | 116            |                      | 6.391                  | -                    |            |
| 5720               | 144            |                      | 6.963                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result               |               |
|--------------------|----------------|----------------------|---------------------------|---------------|
|                    |                |                      | Conducted<br>(dBm/500kHz) | Limit         |
| 5745               | 149            | 802.11ac<br>(20 MHz) | 5.054                     | 30 dBm/500kHz |
| 5785               | 157            |                      | 5.454                     |               |
| 5825               | 165            |                      | 5.765                     |               |



| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5190               | 38             | 802.11ac<br>(40 MHz) | -0.930                 | 3.630                | 11 dBm/MHz |
| 5230               | 46             |                      | 4.046                  | 8.606                |            |
| 5270               | 54             |                      | 2.826                  | -                    |            |
| 5310               | 62             |                      | -0.750                 | -                    |            |
| 5510               | 102            |                      | -2.610                 | -                    |            |
| 5500               | 110            |                      | 2.564                  | -                    |            |
| 5710               | 142            |                      | 3.430                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result               |               |
|--------------------|----------------|----------------------|---------------------------|---------------|
|                    |                |                      | Conducted<br>(dBm/500kHz) | Limit         |
| 5755               | 151            | 802.11ac<br>(40 MHz) | 2.711                     | 30 dBm/500kHz |
| 5795               | 159            |                      | 4.883                     |               |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result            |                      |            |
|--------------------|----------------|----------------------|------------------------|----------------------|------------|
|                    |                |                      | Conducted<br>(dBm/MHz) | E.I.R.P<br>(dBm/MHz) | Limit      |
| 5210               | 42             | 802.11ac<br>(80 MHz) | -7.342                 | -2.782               | 11 dBm/MHz |
| 5290               | 58             |                      | -5.430                 | -                    |            |
| 5530               | 106            |                      | -4.186                 | -                    |            |
| 5690               | 138            |                      | 1.482                  | -                    |            |

| Frequency<br>(MHz) | Channel<br>No. | Mode                 | Test Result               |               |
|--------------------|----------------|----------------------|---------------------------|---------------|
|                    |                |                      | Conducted<br>(dBm/500kHz) | Limit         |
| 5775               | 155            | 802.11ac<br>(80 MHz) | 1.386                     | 30 dBm/500kHz |



**ISED**

| Frequency (MHz) | Channel No. | Mode    | Test Result (dBm/3kHz) |        |                          |       |
|-----------------|-------------|---------|------------------------|--------|--------------------------|-------|
|                 |             |         | Ant 1                  | Ant 2  | Ant 1 +<br>Ant 2<br>MIMO | Limit |
| 5745            | 149         | 802.11a | -7.264                 | -8.811 | -4.993                   | 8     |
| 5785            | 157         |         | -6.297                 | -8.788 | -4.443                   | 8     |
| 5825            | 165         |         | -6.911                 | -7.640 | -4.258                   | 8     |

| Frequency (MHz) | Channel No. | Mode               | Test Result (dBm/3kHz) |        |                          |        |
|-----------------|-------------|--------------------|------------------------|--------|--------------------------|--------|
|                 |             |                    | Ant 1                  | Ant 2  | Ant 1 +<br>Ant 2<br>MIMO | Limit  |
| 5745            | 149         | 802.11n<br>(20MHz) | -8.456                 | -9.093 | -5.758                   | -8.456 |
| 5785            | 157         |                    | -8.193                 | -8.628 | -5.397                   | -8.193 |
| 5825            | 165         |                    | -6.643                 | -7.717 | -4.153                   | -6.643 |

| Frequency (MHz) | Channel No. | Mode               | Test Result (dBm/3kHz) |         |                          |       |
|-----------------|-------------|--------------------|------------------------|---------|--------------------------|-------|
|                 |             |                    | Ant 1                  | Ant 2   | Ant 1 +<br>Ant 2<br>MIMO | Limit |
| 5755            | 151         | 802.11n<br>(40MHz) | -10.558                | -13.076 | -8.716                   | 8     |
| 5795            | 159         |                    | -8.015                 | -11.329 | -6.505                   | 8     |

| Frequency (MHz) | Channel No. | Mode                | Test Result (dBm/3kHz) |         |                          |       |
|-----------------|-------------|---------------------|------------------------|---------|--------------------------|-------|
|                 |             |                     | Ant 1                  | Ant 2   | Ant 1 +<br>Ant 2<br>MIMO | Limit |
| 5745            | 149         | 802.11ac<br>(20MHz) | -8.839                 | -10.904 | -6.800                   | 8     |
| 5785            | 157         |                     | -7.478                 | -10.490 | -5.844                   | 8     |
| 5825            | 165         |                     | -8.499                 | -10.039 | -6.225                   | 8     |





| Frequency (MHz) | Channel No. | Mode     | Test Result (dBm/3kHz) |         |                    |       |
|-----------------|-------------|----------|------------------------|---------|--------------------|-------|
|                 |             |          | Ant 1                  | Ant 2   | Ant 1 + Ant 2 MIMO | Limit |
| 5755            | 151         | 802.11ac | -10.176                | -13.441 | -8.646             | 8     |
| 5795            | 159         | (40MHz)  | -8.552                 | -11.607 | -6.936             | 8     |

| Frequency (MHz) | Channel No. | Mode             | Test Result (dBm/3kHz) |         |                    |       |
|-----------------|-------------|------------------|------------------------|---------|--------------------|-------|
|                 |             |                  | Ant 1                  | Ant 2   | Ant 1 + Ant 2 MIMO | Limit |
| 5775            | 155         | 802.11ac (80MHz) | -12.523                | -14.960 | -10.646            | 8     |




[Ant1]

- ▣ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only channel of highest power.


UNII 1 (Ch. 48)

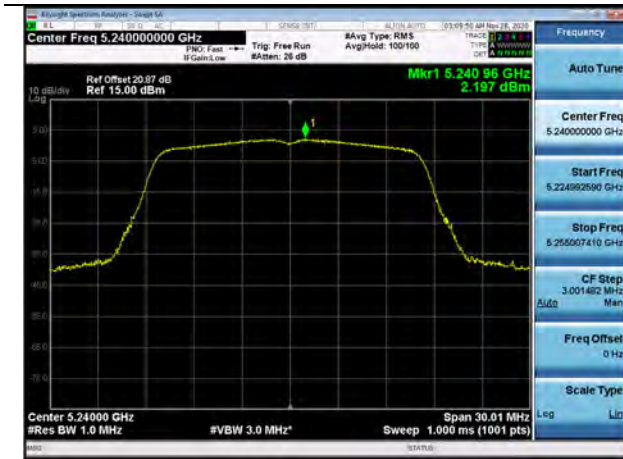


UNII 2A (Ch. 64)



UNII 2C (Ch. 144)

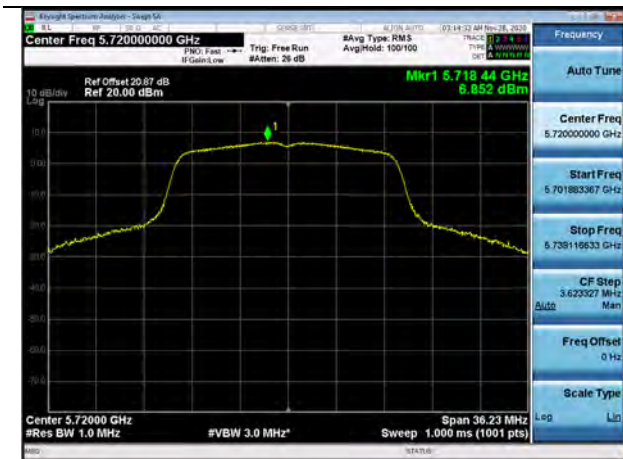

UNII 3 (Ch. 165)

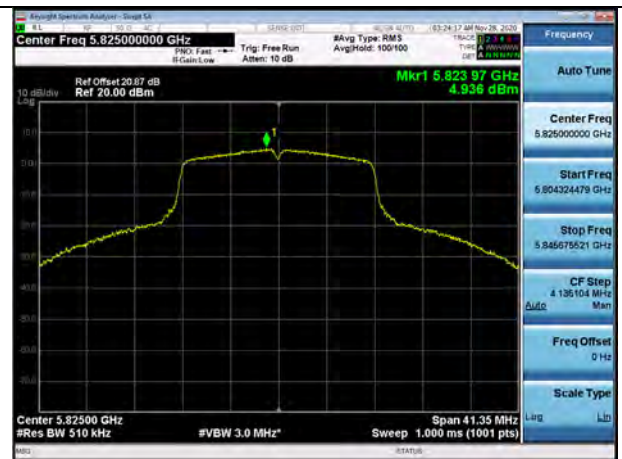

▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only channel of highest power.


UNII 1 (Ch. 48)




UNII 2A (Ch. 64)



UNII 2C (Ch. 144)

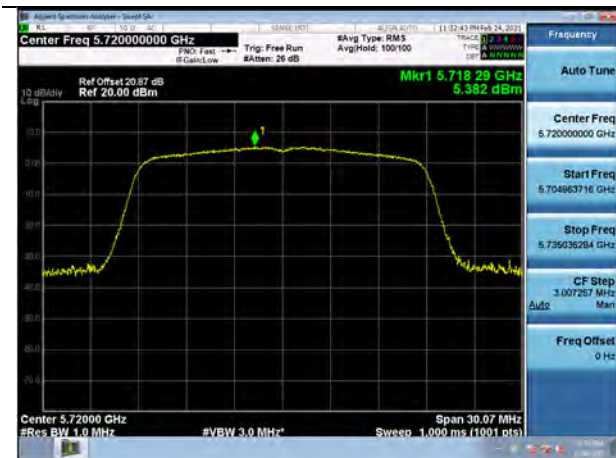

UNII 3 (Ch. 165)

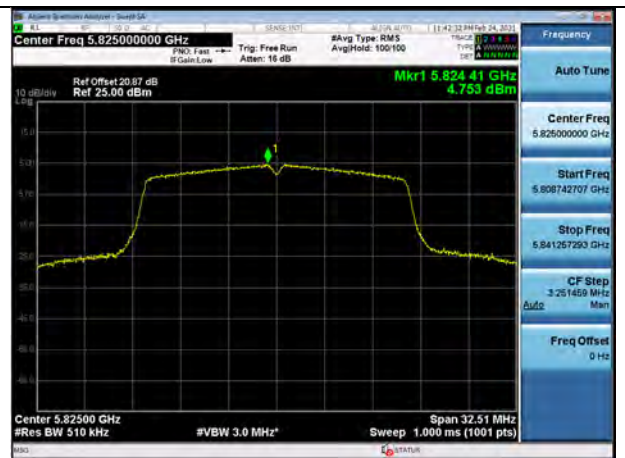




▣ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only channel of highest power.

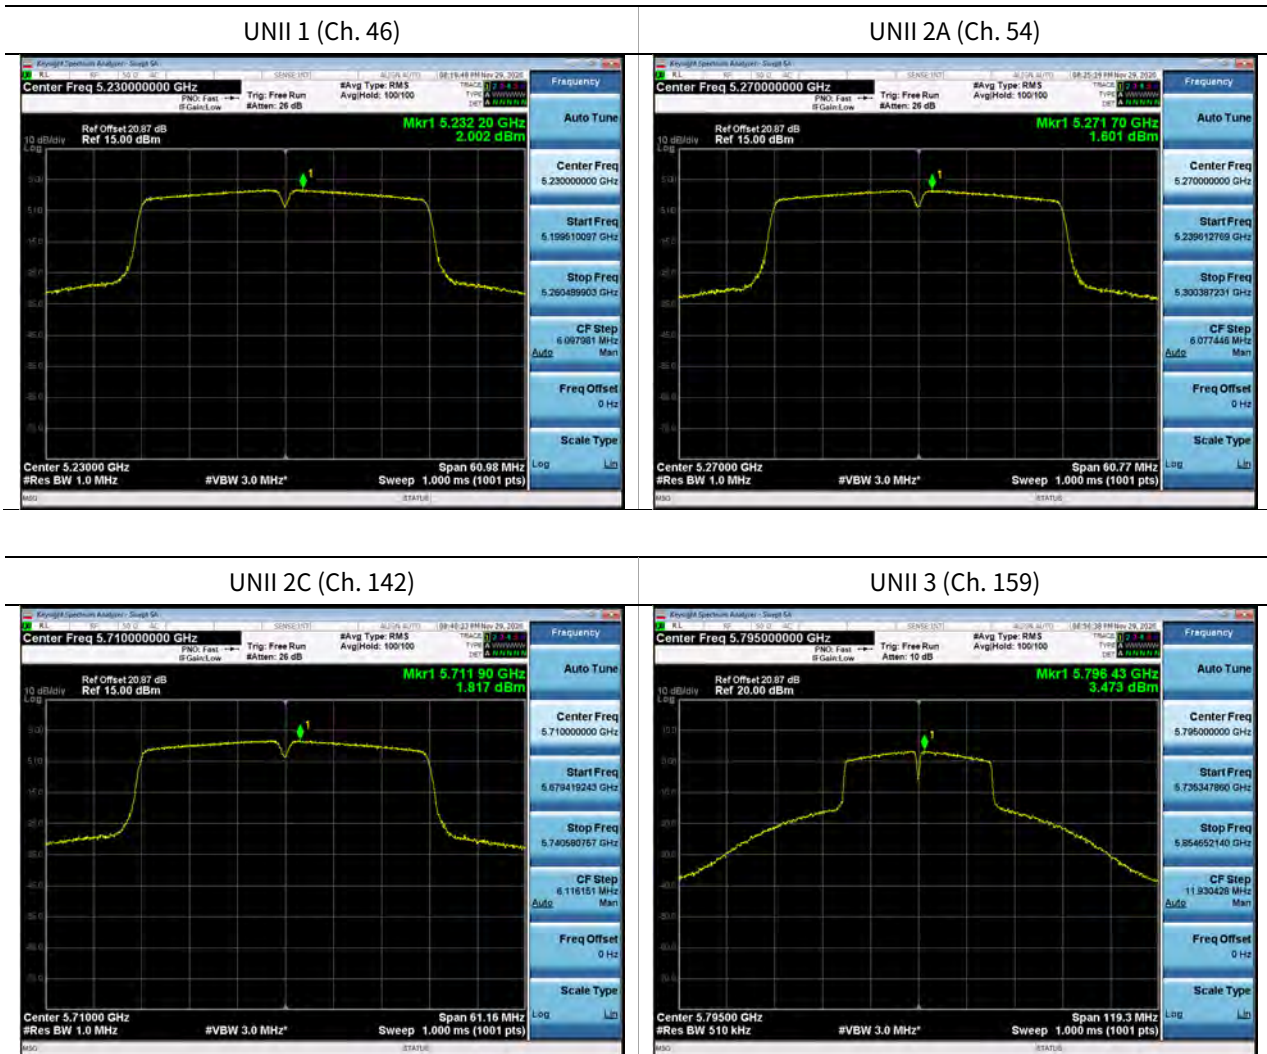




Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only channel of highest power.

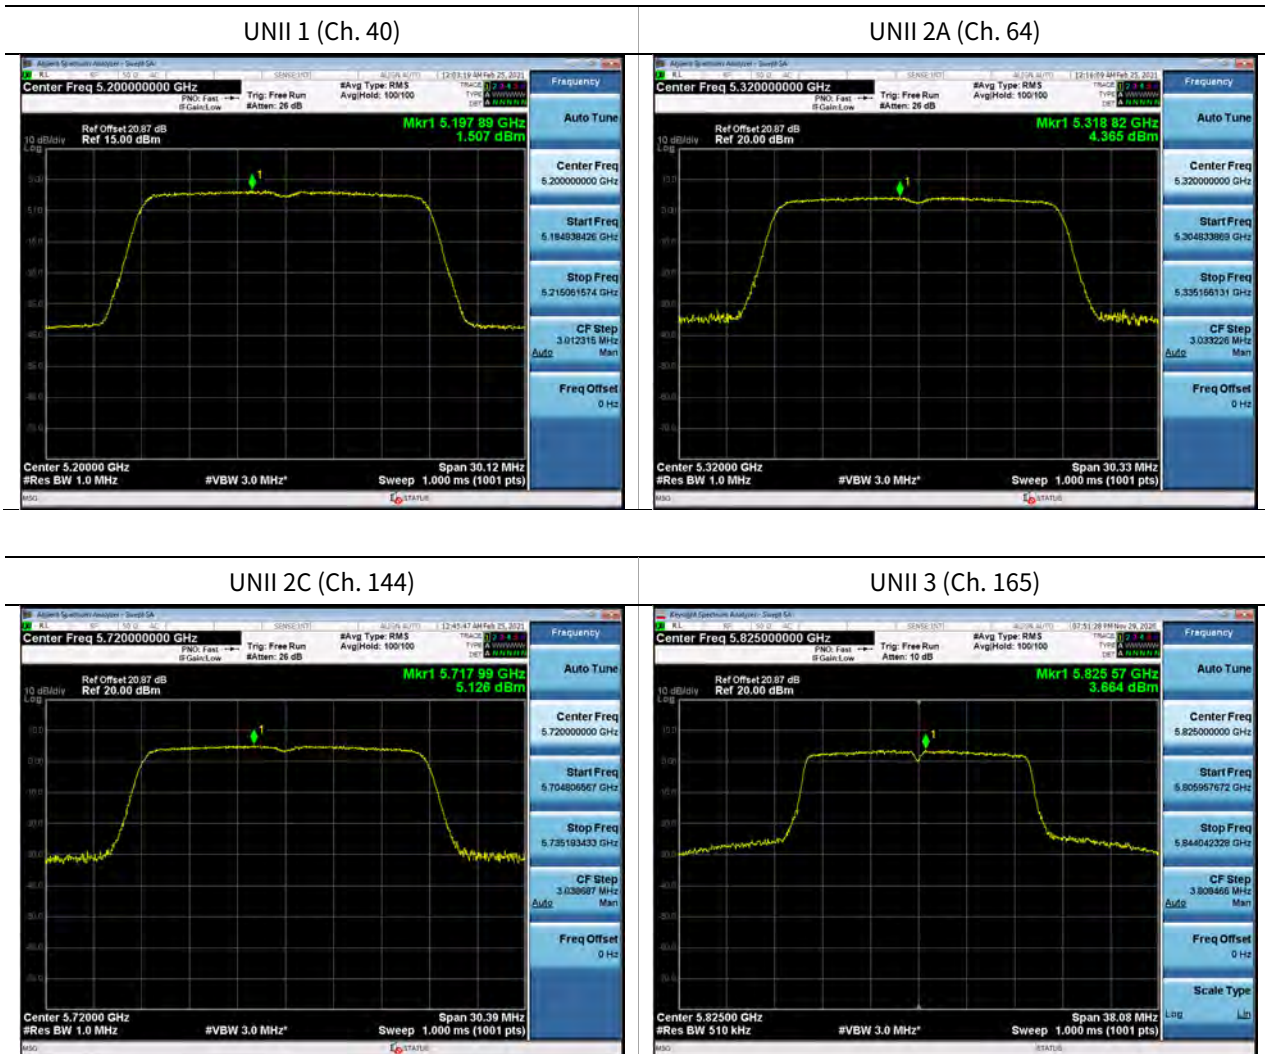

▣ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

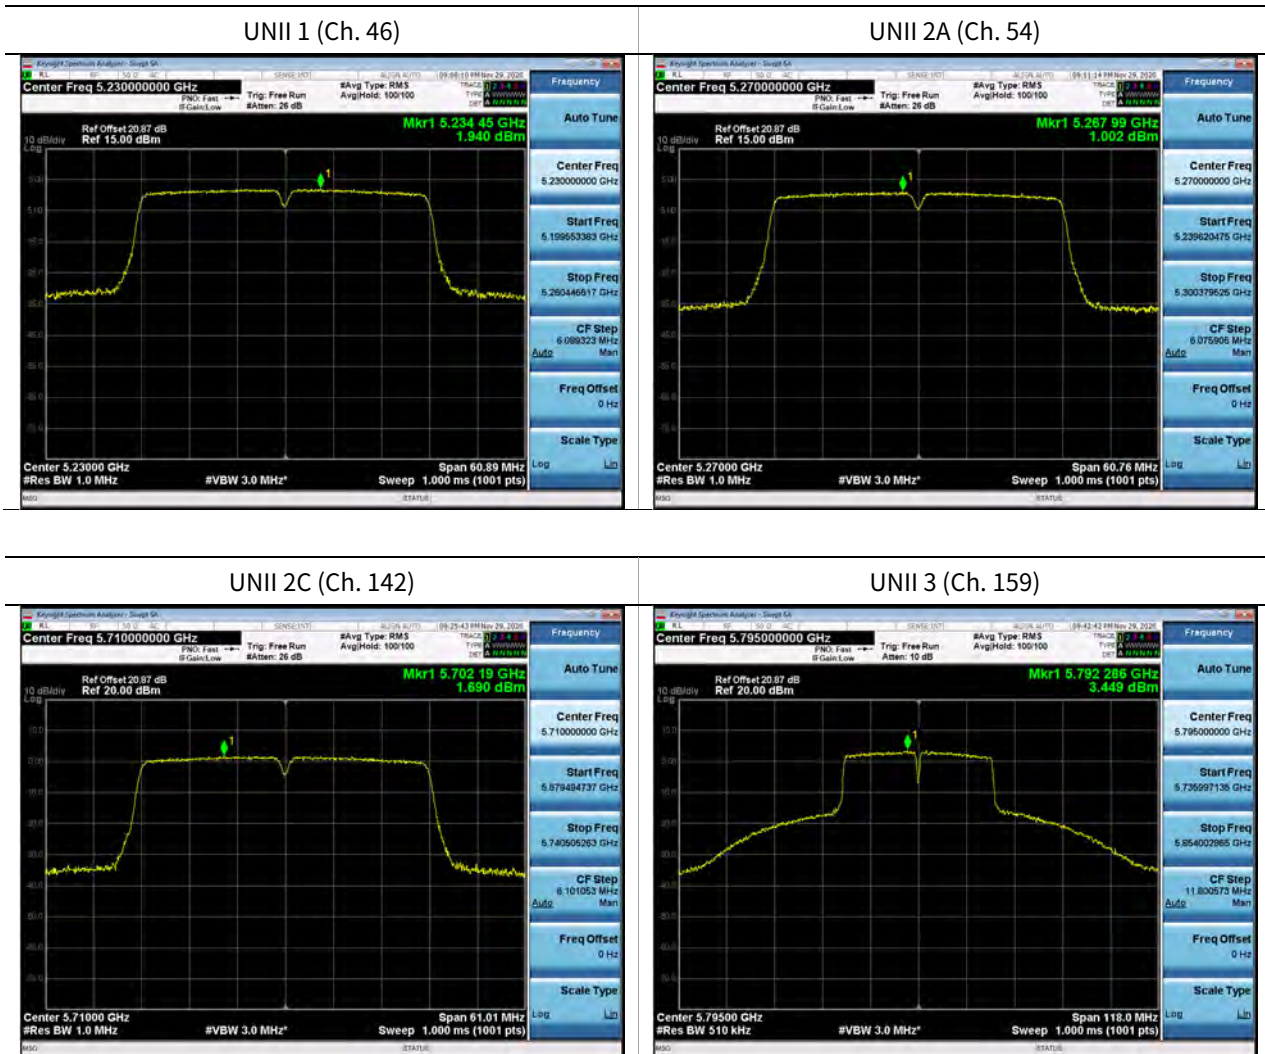

Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only channel of highest power.

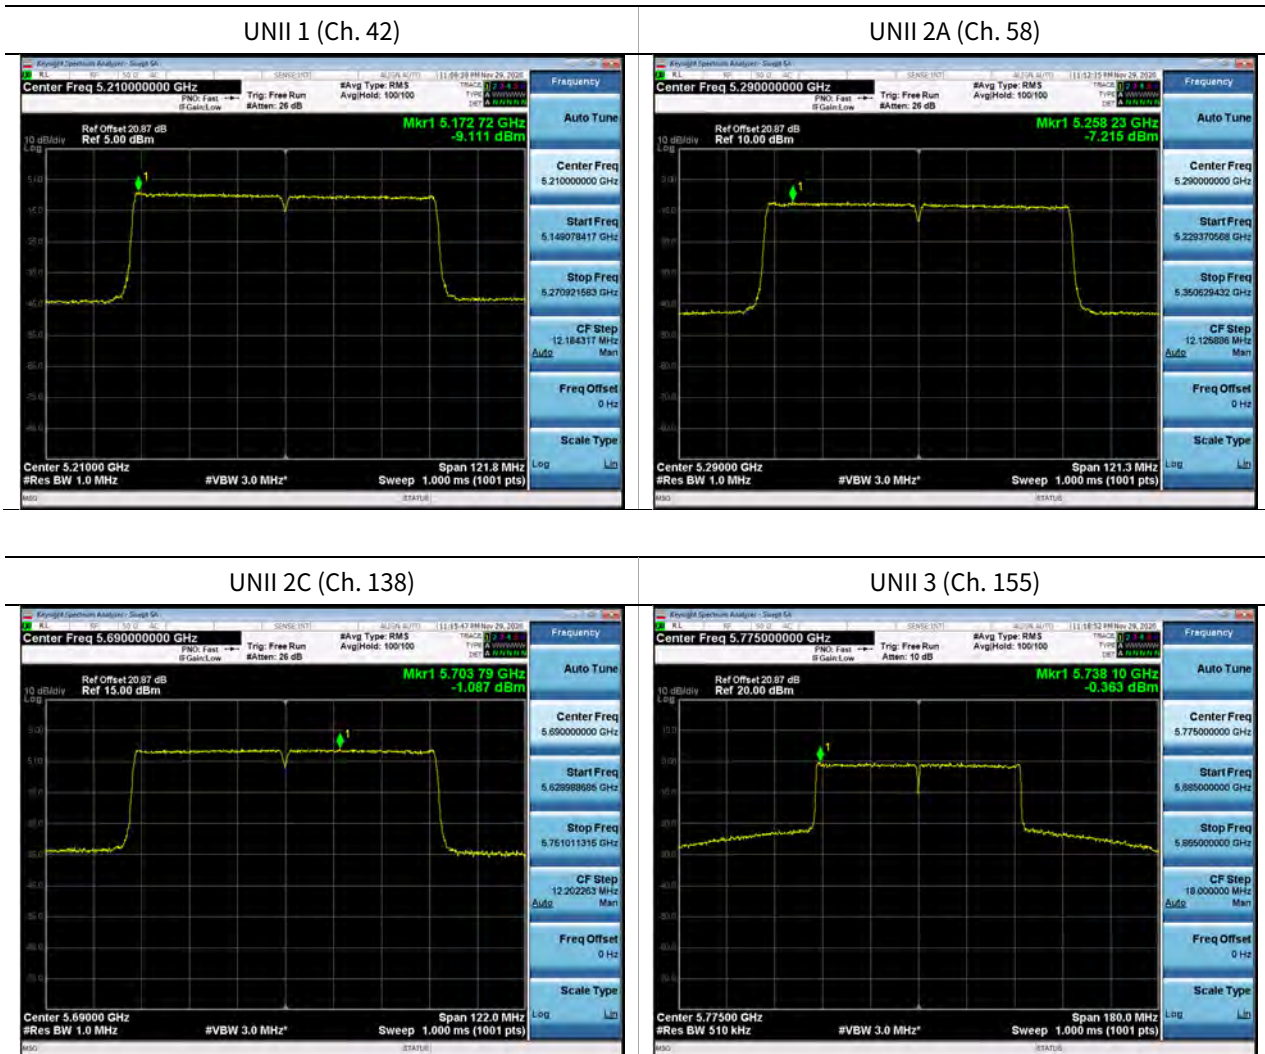





[Ant2]

▣ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only channel of highest power.


UNII 1 (Ch. 40)




UNII 2A (Ch. 64)



UNII 2C (Ch. 116)

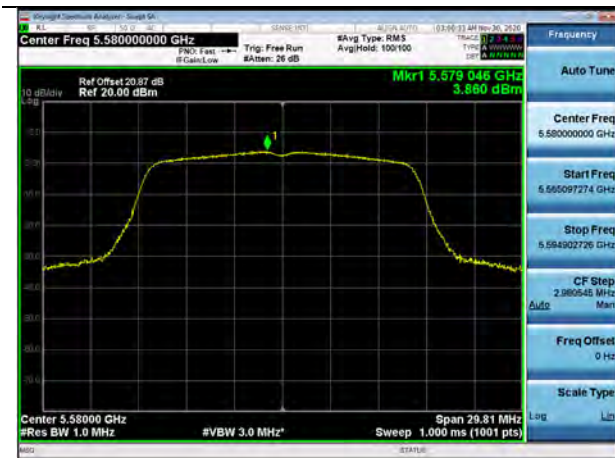

UNII 3 (Ch. 157)

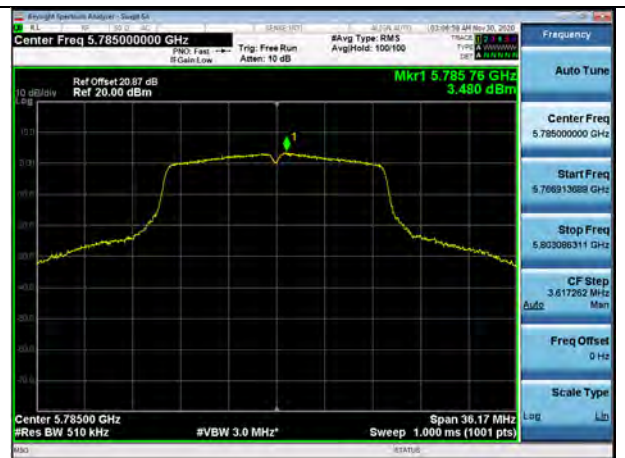



▣ Test Plots(802.11n(HT20))


Note:

In order to simplify the report, attached plots were only channel of highest power.


UNII 1 (Ch. 36)




UNII 2A (Ch. 64)

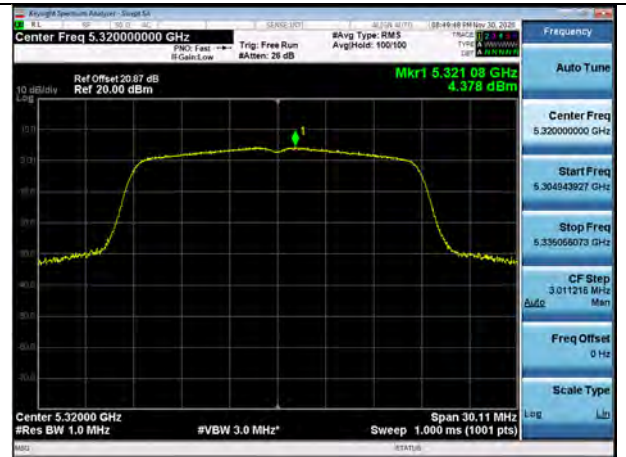

UNII 2C (Ch. 116)

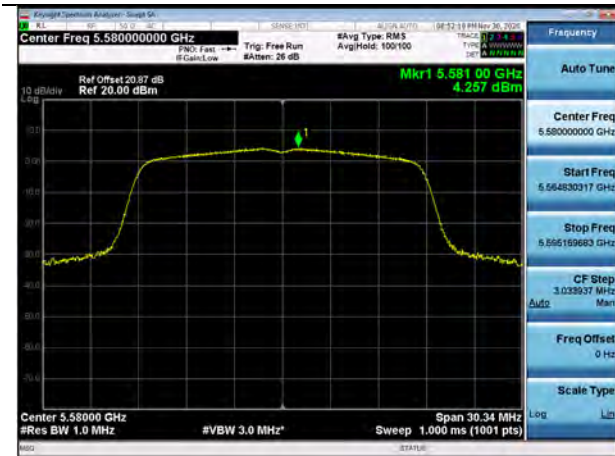


UNII 3 (Ch. 165)

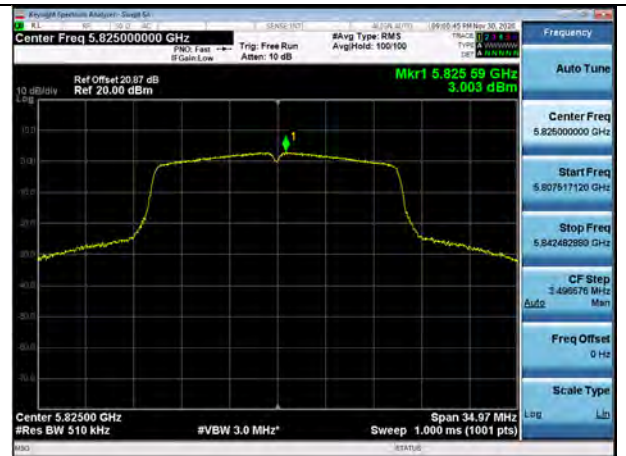

Test Plots(802.11n(HT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

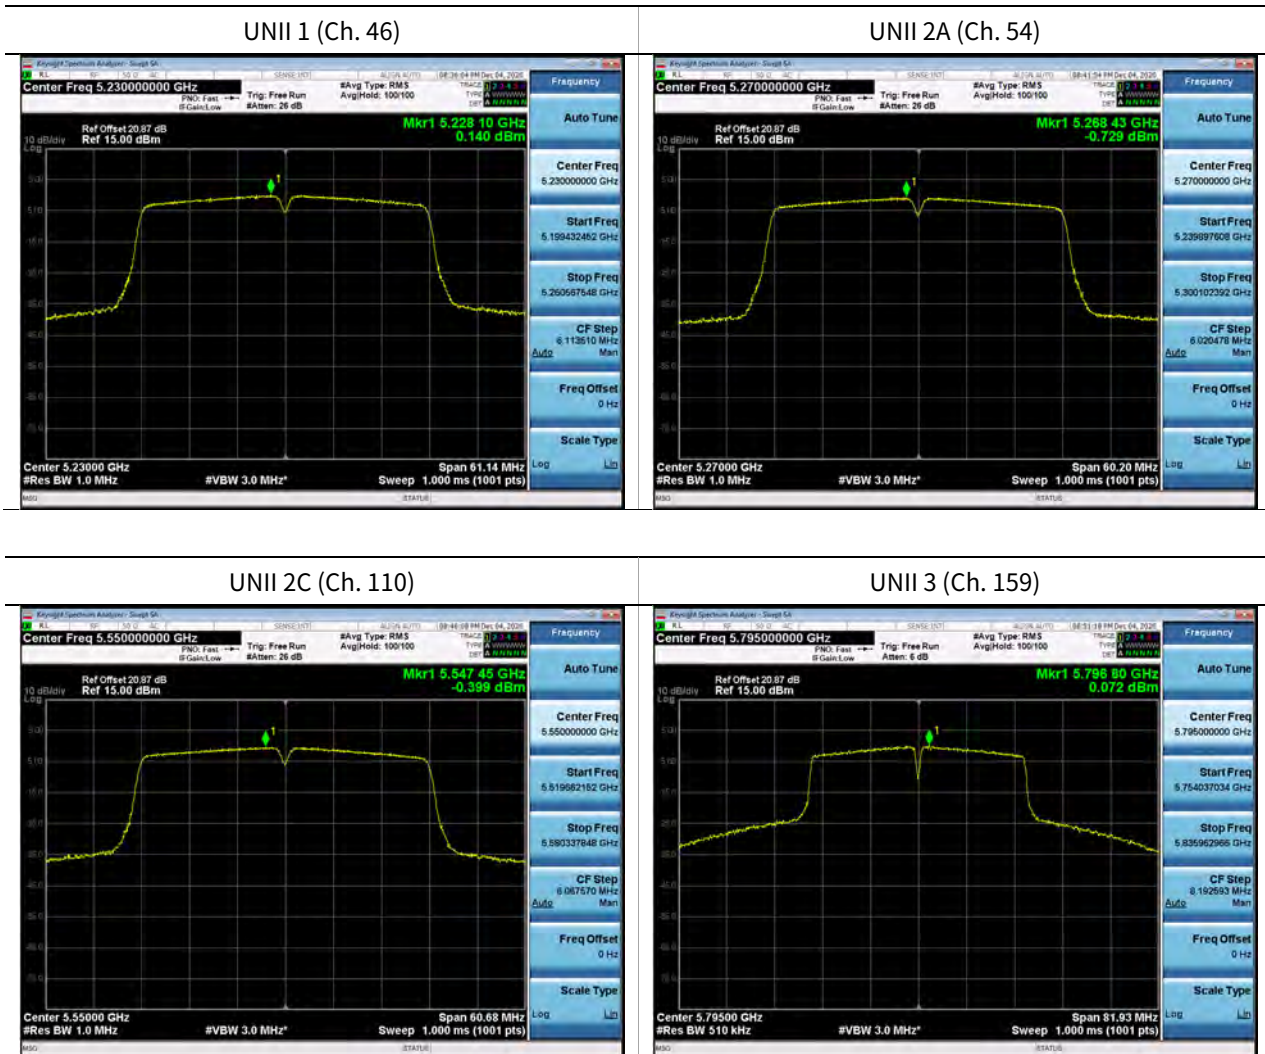

▣ Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only channel of highest power.

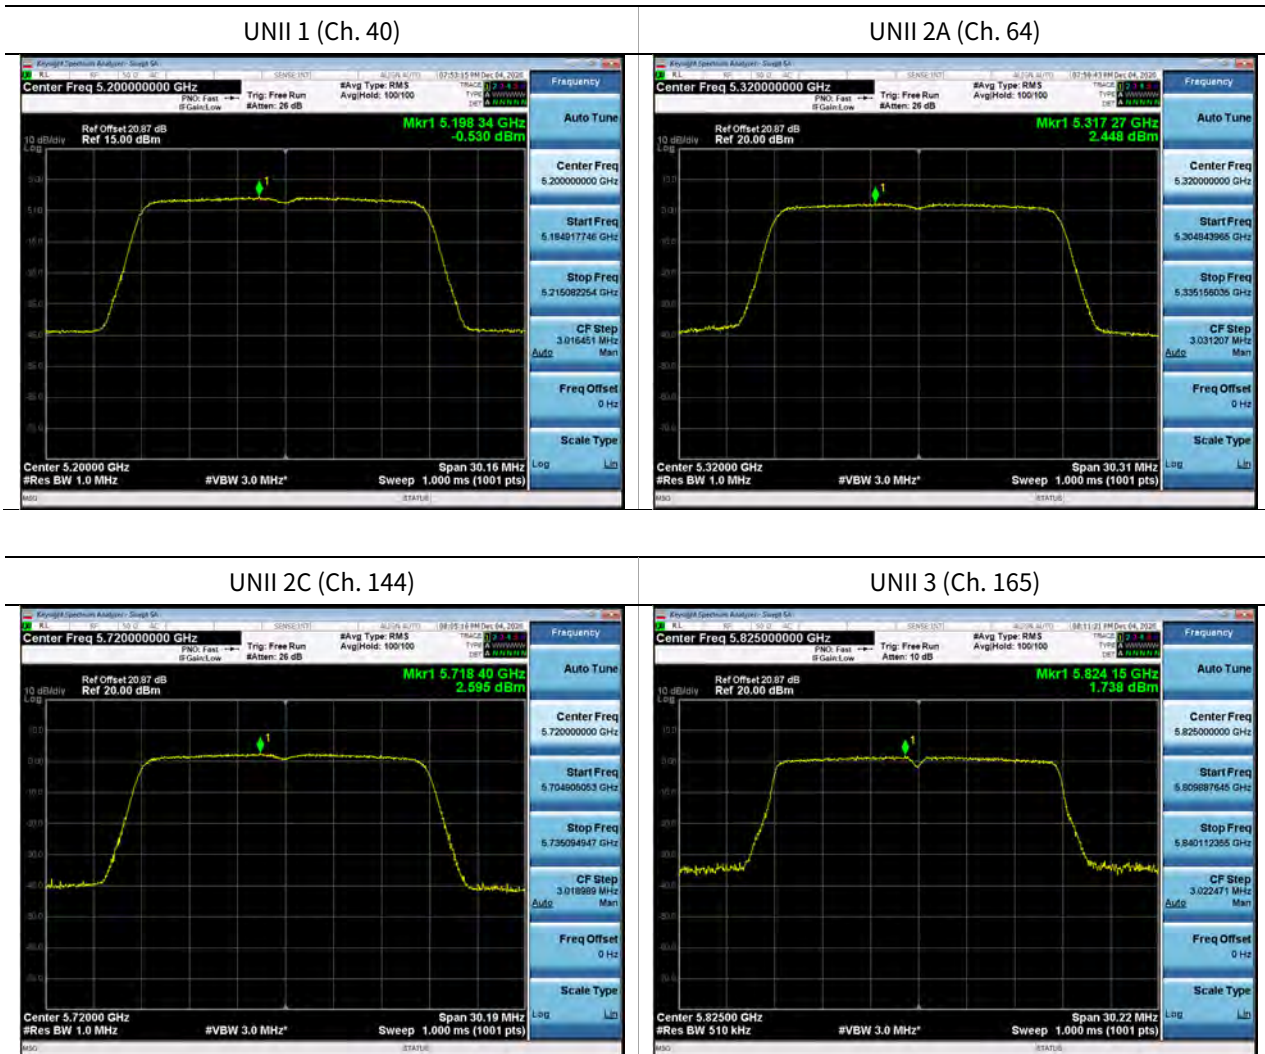




Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

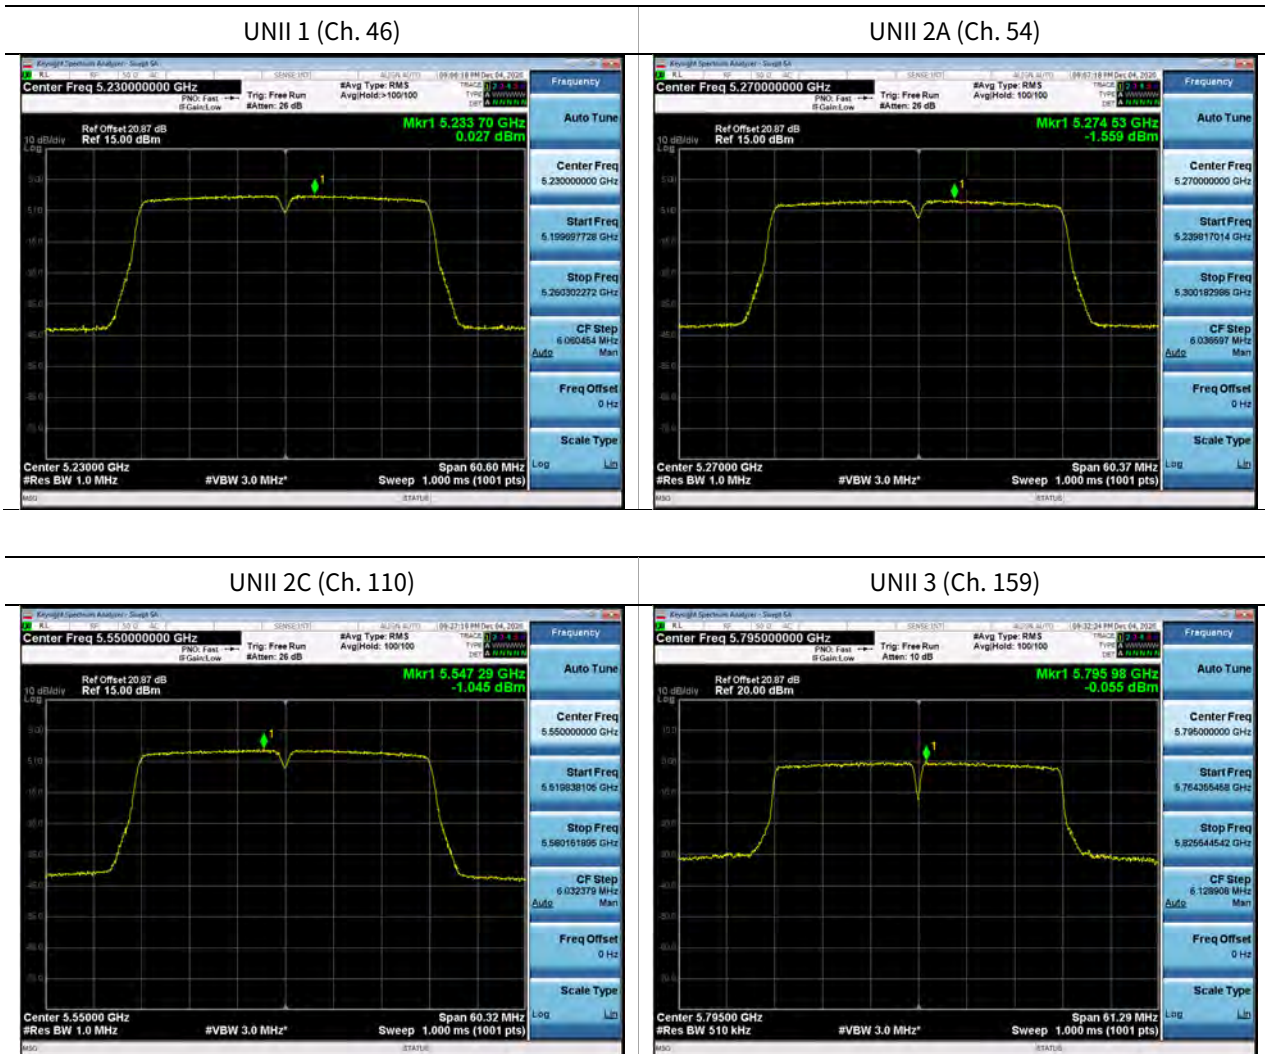

Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only channel of highest power.

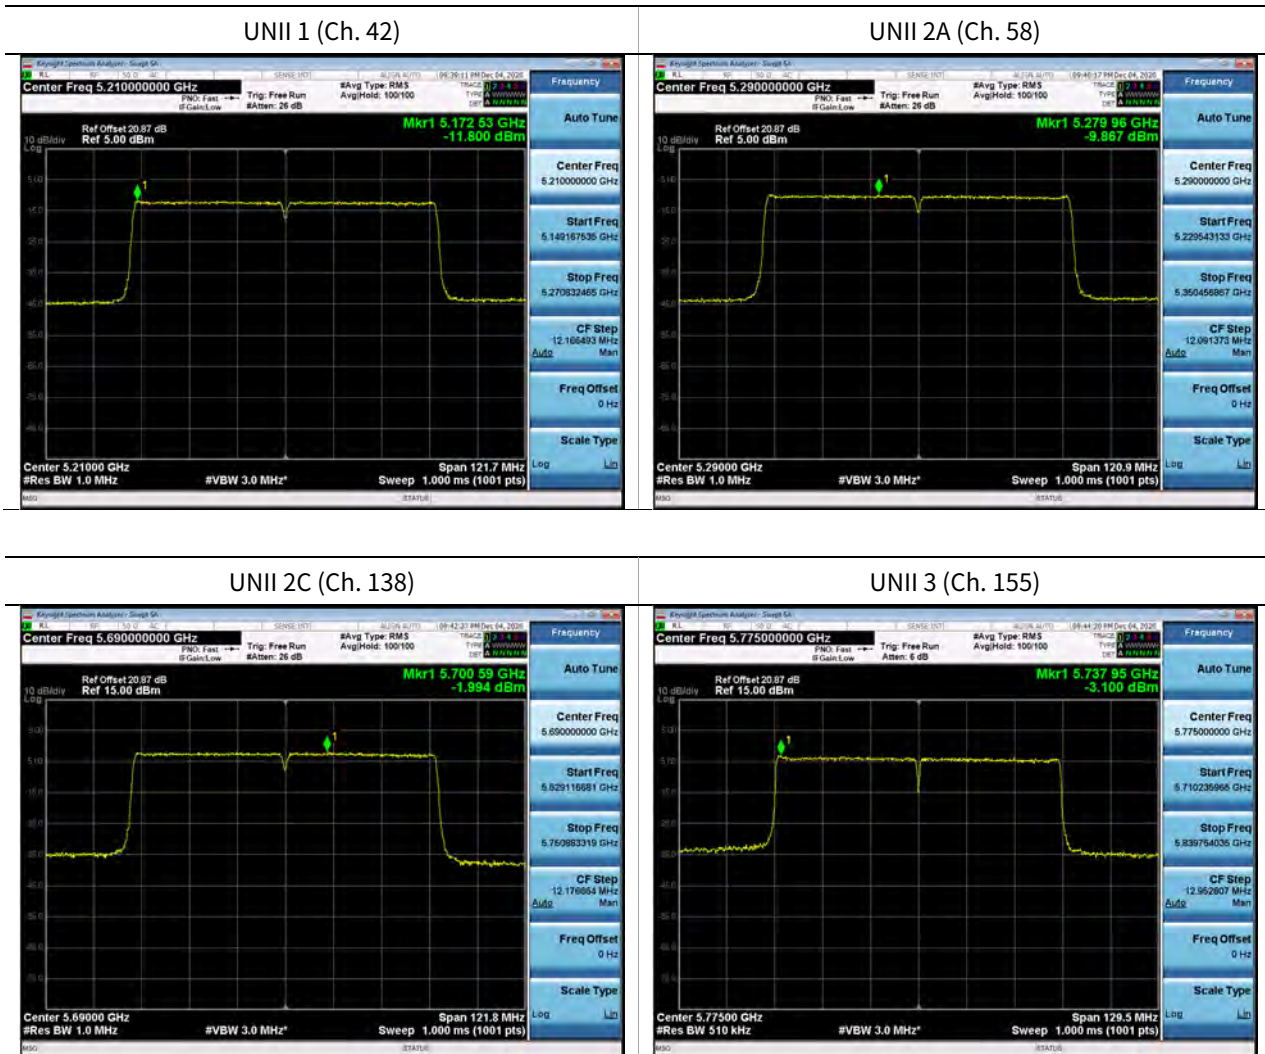

## 10.5 FREQUENCY STABILITY.

### 10.5.1 80MHz BW

[ANT1]

Startup after the EUT is energized

|                      |                  |
|----------------------|------------------|
| OPERATING BAND:      | UNII Band 1      |
| OPERATING FREQUENCY: | 5,210,000,000 Hz |
| CHANNEL:             | 42               |
| REFERENCE VOLTAGE:   | 3.85 VDC         |

| Voltage | Power | Temp.    | Frequency  | Frequency   |
|---------|-------|----------|------------|-------------|
| (%)     | (VDC) | (°C)     | (kHz)      | Error (kHz) |
| 100%    | 3.3   | +20(Ref) | 5210077.91 | 77.91       |
| 100%    |       | -30      | 5210042.24 | 42.24       |
| 100%    |       | -20      | 5210010.23 | 10.23       |
| 100%    |       | -10      | 5210036.62 | 36.62       |
| 100%    |       | 0        | 5210014.82 | 14.82       |
| 100%    |       | +10      | 5210052.60 | 52.60       |
| 100%    |       | +30      | 5210006.62 | 6.62        |
| 100%    |       | +40      | 5210075.94 | 75.94       |
| 100%    |       | +50      | 5210023.38 | 23.38       |
| Max     |       | 3.135    | +20        | 5210086.56  |
| Min     | 3.60  | +20      | 5210031.40 | 31.40       |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5290099.70      | 99.70                 |
| 100%        |             | -30        | 5290026.58      | 26.58                 |
| 100%        |             | -20        | 5290037.77      | 37.77                 |
| 100%        |             | -10        | 5290039.42      | 39.42                 |
| 100%        |             | 0          | 5290078.65      | 78.65                 |
| 100%        |             | +10        | 5290033.96      | 33.96                 |
| 100%        |             | +30        | 5290068.89      | 68.89                 |
| 100%        |             | +40        | 5290019.38      | 19.38                 |
| 100%        |             | +50        | 5290005.38      | 5.38                  |
| Max         |             | 3.135      | +20             | 5290006.05            |
| Min         | 3.60        | +20        | 5290045.62      | 45.62                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5530034.56      | 34.56                 |
| 100%        |             | -30        | 5530083.37      | 83.37                 |
| 100%        |             | -20        | 5530017.18      | 17.18                 |
| 100%        |             | -10        | 5530088.37      | 88.37                 |
| 100%        |             | 0          | 5530083.21      | 83.21                 |
| 100%        |             | +10        | 5530059.43      | 59.43                 |
| 100%        |             | +30        | 5530019.52      | 19.52                 |
| 100%        |             | +40        | 5530072.75      | 72.75                 |
| 100%        |             | +50        | 5530065.79      | 65.79                 |
| Max         |             | 3.135      | +20             | 5530031.11            |
| Min         | 3.60        | +20        | 5530072.06      | 72.06                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.





OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5775091.79      | 91.79                 |
| 100%        |             | -30        | 5775014.71      | 14.71                 |
| 100%        |             | -20        | 5775040.99      | 40.99                 |
| 100%        |             | -10        | 5775010.78      | 10.78                 |
| 100%        |             | 0          | 5775086.22      | 86.22                 |
| 100%        |             | +10        | 5775042.77      | 42.77                 |
| 100%        |             | +30        | 5775063.16      | 63.16                 |
| 100%        |             | +40        | 5775020.22      | 20.22                 |
| 100%        |             | +50        | 5775001.42      | 1.42                  |
| Max         |             | 3.135      | +20             | 5775037.59            |
| Min         | 3.60        | +20        | 5775050.28      | 50.28                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



**2 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5210042.16      | 42.16                 |
| 100%        |             | -30        | 5210023.95      | 23.95                 |
| 100%        |             | -20        | 5210029.83      | 29.83                 |
| 100%        |             | -10        | 5210050.40      | 50.40                 |
| 100%        |             | 0          | 5210066.93      | 66.93                 |
| 100%        |             | +10        | 5210058.75      | 58.75                 |
| 100%        |             | +30        | 5210038.32      | 38.32                 |
| 100%        |             | +40        | 5210045.07      | 45.07                 |
| 100%        |             | +50        | 5210074.13      | 74.13                 |
| Max         |             | 3.6        | +20             | 5210080.17            |
| Min         | 3.14        | +20        | 5210040.10      | 40.10                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5290085.92      | 85.92                 |
| 100%        |             | -30        | 5290082.83      | 82.83                 |
| 100%        |             | -20        | 5290074.53      | 74.53                 |
| 100%        |             | -10        | 5290063.60      | 63.6                  |
| 100%        |             | 0          | 5290093.98      | 93.98                 |
| 100%        |             | +10        | 5290026.13      | 26.13                 |
| 100%        |             | +30        | 5290075.84      | 75.84                 |
| 100%        |             | +40        | 5290043.59      | 43.59                 |
| 100%        |             | +50        | 5290092.35      | 92.35                 |
| Max         |             | 3.6        | +20             | 5290004.25            |
| Min         | 3.14        | +20        | 5290026.32      | 26.32                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5530031.85      | 31.85                 |
| 100%        |             | -30        | 5530061.80      | 61.80                 |
| 100%        |             | -20        | 5530055.20      | 55.2                  |
| 100%        |             | -10        | 5530057.39      | 57.39                 |
| 100%        |             | 0          | 5530088.97      | 88.97                 |
| 100%        |             | +10        | 5530098.97      | 98.97                 |
| 100%        |             | +30        | 5530070.11      | 70.11                 |
| 100%        |             | +40        | 5530047.38      | 47.38                 |
| 100%        |             | +50        | 5530053.99      | 53.99                 |
| Max         |             | 3.6        | +20             | 5530031.11            |
| Min         | 3.14        | +20        | 5530079.26      | 79.26                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5775036.13      | 36.13                 |
| 100%        |             | -30        | 5775003.20      | 3.20                  |
| 100%        |             | -20        | 5775003.55      | 3.55                  |
| 100%        |             | -10        | 5775049.63      | 49.63                 |
| 100%        |             | 0          | 5775082.82      | 82.82                 |
| 100%        |             | +10        | 5775089.83      | 89.83                 |
| 100%        |             | +30        | 5775024.37      | 24.37                 |
| 100%        |             | +40        | 5775072.86      | 72.86                 |
| 100%        |             | +50        | 5775073.18      | 73.18                 |
| Max         |             | 3.6        | +20             | 5775049.35            |
| Min         | 3.14        | +20        | 5775032.60      | 32.6                  |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



**5 minutes after the EUT is energized**

OPERATING BAND:                      UNII Band 1  
 OPERATING FREQUENCY:              5,210,000,000 Hz  
 CHANNEL:                                42  
 REFERENCE VOLTAGE:                 3.85 VDC

| Voltage | Power | Temp.    | Frequency  | Frequency   |
|---------|-------|----------|------------|-------------|
| (%)     | (VDC) | (°C)     | (kHz)      | Error (kHz) |
| 100%    | 3.3   | +20(Ref) | 5210021.80 | 21.80       |
| 100%    |       | -30      | 5210090.61 | 90.61       |
| 100%    |       | -20      | 5210074.53 | 74.53       |
| 100%    |       | -10      | 5210018.03 | 18.03       |
| 100%    |       | 0        | 5210074.25 | 74.25       |
| 100%    |       | +10      | 5210080.89 | 80.89       |
| 100%    |       | +30      | 5210075.78 | 75.78       |
| 100%    |       | +40      | 5210076.21 | 76.21       |
| 100%    |       | +50      | 5210038.60 | 38.60       |
| Max     |       | 3.6      | +20        | 5210029.54  |
| Min     | 3.14  | +20      | 5210050.74 | 50.74       |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5290003.88      | 3.88                  |
| 100%        |             | -30        | 5290043.40      | 43.40                 |
| 100%        |             | -20        | 5290015.50      | 15.5                  |
| 100%        |             | -10        | 5290003.19      | 3.19                  |
| 100%        |             | 0          | 5290021.82      | 21.82                 |
| 100%        |             | +10        | 5290011.16      | 11.16                 |
| 100%        |             | +30        | 5290073.95      | 73.95                 |
| 100%        |             | +40        | 5290003.51      | 3.51                  |
| 100%        |             | +50        | 5290012.17      | 12.17                 |
| Max         |             | 3.6        | +20             | 5290027.09            |
| Min         | 3.14        | +20        | 5290006.16      | 6.16                  |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5530012.15      | 12.15                 |
| 100%        |             | -30        | 5530024.93      | 24.93                 |
| 100%        |             | -20        | 5530047.97      | 47.97                 |
| 100%        |             | -10        | 5530055.83      | 55.83                 |
| 100%        |             | 0          | 5530070.51      | 70.51                 |
| 100%        |             | +10        | 5530071.39      | 71.39                 |
| 100%        |             | +30        | 5530090.50      | 90.5                  |
| 100%        |             | +40        | 5530041.25      | 41.25                 |
| 100%        |             | +50        | 5530095.20      | 95.20                 |
| Max         |             | 3.6        | +20             | 5530006.80            |
| Min         | 3.14        | +20        | 5530022.27      | 22.27                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.





OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5775063.56      | 63.56                 |
| 100%        |             | -30        | 5775079.53      | 79.53                 |
| 100%        |             | -20        | 5775072.78      | 72.78                 |
| 100%        |             | -10        | 5775043.14      | 43.14                 |
| 100%        |             | 0          | 5775099.49      | 99.49                 |
| 100%        |             | +10        | 5775019.40      | 19.4                  |
| 100%        |             | +30        | 5775093.92      | 93.92                 |
| 100%        |             | +40        | 5775014.82      | 14.82                 |
| 100%        |             | +50        | 5775028.89      | 28.89                 |
| Max         |             | 3.6        | +20             | 5775070.37            |
| Min         | 3.14        | +20        | 5775031.29      | 31.29                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



**10 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5210037.87      | 37.87                 |
| 100%        |             | -30        | 5210026.52      | 26.52                 |
| 100%        |             | -20        | 5210063.16      | 63.16                 |
| 100%        |             | -10        | 5210075.64      | 75.64                 |
| 100%        |             | 0          | 5210086.45      | 86.45                 |
| 100%        |             | +10        | 5210064.66      | 64.66                 |
| 100%        |             | +30        | 5210053.19      | 53.19                 |
| 100%        |             | +40        | 5210059.43      | 59.43                 |
| 100%        |             | +50        | 5210057.57      | 57.57                 |
| Max         |             | 3.6        | +20             | 5210050.66            |
| Min         | 3.14        | +20        | 5210025.05      | 25.05                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5290083.12      | 83.12                 |
| 100%        |             | -30        | 5290079.07      | 79.07                 |
| 100%        |             | -20        | 5290077.95      | 77.95                 |
| 100%        |             | -10        | 5290054.99      | 54.99                 |
| 100%        |             | 0          | 5290001.84      | 1.84                  |
| 100%        |             | +10        | 5290055.70      | 55.7                  |
| 100%        |             | +30        | 5290097.23      | 97.23                 |
| 100%        |             | +40        | 5290055.52      | 55.52                 |
| 100%        |             | +50        | 5290013.21      | 13.21                 |
| Max         |             | 3.6        | +20             | 5290077.15            |
| Min         | 3.14        | +20        | 5290021.08      | 21.08                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5530045.50      | 45.50                 |
| 100%        |             | -30        | 5530030.08      | 30.08                 |
| 100%        |             | -20        | 5530076.78      | 76.78                 |
| 100%        |             | -10        | 5530062.75      | 62.75                 |
| 100%        |             | 0          | 5530043.28      | 43.28                 |
| 100%        |             | +10        | 5530072.09      | 72.09                 |
| 100%        |             | +30        | 5530019.31      | 19.31                 |
| 100%        |             | +40        | 5530056.80      | 56.8                  |
| 100%        |             | +50        | 5530069.63      | 69.63                 |
| Max         |             | 3.6        | +20             | 5530045.84            |
| Min         | 3.14        | +20        | 5530033.19      | 33.19                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5775064.12      | 64.12                 |
| 100%        |             | -30        | 5775054.04      | 54.04                 |
| 100%        |             | -20        | 5775068.06      | 68.06                 |
| 100%        |             | -10        | 5775072.11      | 72.11                 |
| 100%        |             | 0          | 5775058.37      | 58.37                 |
| 100%        |             | +10        | 5775086.31      | 86.31                 |
| 100%        |             | +30        | 5775048.46      | 48.46                 |
| 100%        |             | +40        | 5775035.28      | 35.28                 |
| 100%        |             | +50        | 5775037.76      | 37.76                 |
| Max         |             | 3.6        | +20             | 5775039.14            |
| Min         | 3.14        | +20        | 5775057.03      | 57.03                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



**[ANT2]**

**Startup after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5210088.81      | 88.81                 |
| 100%        |             | -30        | 5210098.32      | 98.32                 |
| 100%        |             | -20        | 5210071.56      | 71.56                 |
| 100%        |             | -10        | 5210039.64      | 39.64                 |
| 100%        |             | 0          | 5210046.35      | 46.35                 |
| 100%        |             | +10        | 5210021.14      | 21.14                 |
| 100%        |             | +30        | 5210072.54      | 72.54                 |
| 100%        |             | +40        | 5210030.46      | 30.46                 |
| 100%        |             | +50        | 5210094.53      | 94.53                 |
| Max         |             | 3.135      | +20             | 5210028.53            |
| Min         | 3.60        | +20        | 5210041.02      | 41.02                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5290057.72      | 57.72                 |
| 100%        |             | -30        | 5290016.61      | 16.61                 |
| 100%        |             | -20        | 5290090.20      | 90.2                  |
| 100%        |             | -10        | 5290020.77      | 20.77                 |
| 100%        |             | 0          | 5290070.03      | 70.03                 |
| 100%        |             | +10        | 5290066.93      | 66.93                 |
| 100%        |             | +30        | 5290002.93      | 2.93                  |
| 100%        |             | +40        | 5290046.68      | 46.68                 |
| 100%        |             | +50        | 5290078.53      | 78.53                 |
| Max         |             | 3.135      | +20             | 5290085.07            |
| Min         | 3.60        | +20        | 5290081.89      | 81.89                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5530090.33      | 90.33                 |
| 100%        |             | -30        | 5530060.32      | 60.32                 |
| 100%        |             | -20        | 5530088.92      | 88.92                 |
| 100%        |             | -10        | 5530022.81      | 22.81                 |
| 100%        |             | 0          | 5530090.58      | 90.58                 |
| 100%        |             | +10        | 5530082.97      | 82.97                 |
| 100%        |             | +30        | 5530077.94      | 77.94                 |
| 100%        |             | +40        | 5530077.06      | 77.06                 |
| 100%        |             | +50        | 5530034.54      | 34.54                 |
| Max         |             | 3.135      | +20             | 5530069.29            |
| Min         | 3.60        | +20        | 5530051.62      | 51.62                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.





OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5775034.97      | 34.97                 |
| 100%        |             | -30        | 5775041.14      | 41.14                 |
| 100%        |             | -20        | 5775071.67      | 71.67                 |
| 100%        |             | -10        | 5775024.52      | 24.52                 |
| 100%        |             | 0          | 5775062.32      | 62.32                 |
| 100%        |             | +10        | 5775065.31      | 65.31                 |
| 100%        |             | +30        | 5775016.12      | 16.12                 |
| 100%        |             | +40        | 5775014.38      | 14.38                 |
| 100%        |             | +50        | 5775078.40      | 78.40                 |
| Max         |             | 3.135      | +20             | 5775049.43            |
| Min         | 3.60        | +20        | 5775017.34      | 17.34                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



**2 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5210086.19      | 86.19                 |
| 100%        |             | -30        | 5210042.49      | 42.49                 |
| 100%        |             | -20        | 5210068.47      | 68.47                 |
| 100%        |             | -10        | 5210065.57      | 65.57                 |
| 100%        |             | 0          | 5210071.82      | 71.82                 |
| 100%        |             | +10        | 5210003.19      | 3.19                  |
| 100%        |             | +30        | 5210036.56      | 36.56                 |
| 100%        |             | +40        | 5210066.68      | 66.68                 |
| 100%        |             | +50        | 5210072.34      | 72.34                 |
| Max         |             | 3.6        | +20             | 5210022.82            |
| Min         | 3.14        | +20        | 5210057.18      | 57.18                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5290081.13      | 81.13                 |
| 100%        |             | -30        | 5290095.49      | 95.49                 |
| 100%        |             | -20        | 5290044.67      | 44.67                 |
| 100%        |             | -10        | 5290063.30      | 63.3                  |
| 100%        |             | 0          | 5290059.74      | 59.74                 |
| 100%        |             | +10        | 5290019.68      | 19.68                 |
| 100%        |             | +30        | 5290086.95      | 86.95                 |
| 100%        |             | +40        | 5290071.63      | 71.63                 |
| 100%        |             | +50        | 5290027.86      | 27.86                 |
| Max         |             | 3.6        | +20             | 5290022.65            |
| Min         | 3.14        | +20        | 5290067.87      | 67.87                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5530037.43      | 37.43                 |
| 100%        |             | -30        | 5530088.63      | 88.63                 |
| 100%        |             | -20        | 5530078.57      | 78.57                 |
| 100%        |             | -10        | 5530098.57      | 98.57                 |
| 100%        |             | 0          | 5530062.96      | 62.96                 |
| 100%        |             | +10        | 5530091.20      | 91.2                  |
| 100%        |             | +30        | 5530011.43      | 11.43                 |
| 100%        |             | +40        | 5530046.79      | 46.79                 |
| 100%        |             | +50        | 5530001.94      | 1.94                  |
| Max         |             | 3.6        | +20             | 5530024.77            |
| Min         | 3.14        | +20        | 5530048.23      | 48.23                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5775016.69      | 16.69                 |
| 100%        |             | -30        | 5775083.60      | 83.60                 |
| 100%        |             | -20        | 5775072.08      | 72.08                 |
| 100%        |             | -10        | 5775082.37      | 82.37                 |
| 100%        |             | 0          | 5775053.72      | 53.72                 |
| 100%        |             | +10        | 5775095.06      | 95.06                 |
| 100%        |             | +30        | 5775019.95      | 19.95                 |
| 100%        |             | +40        | 5775078.58      | 78.58                 |
| 100%        |             | +50        | 5775047.34      | 47.34                 |
| Max         |             | 3.6        | +20             | 5775011.10            |
| Min         | 3.14        | +20        | 5775046.43      | 46.43                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



**5 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5210072.62      | 72.62                 |
| 100%        |             | -30        | 5210063.64      | 63.64                 |
| 100%        |             | -20        | 5210073.54      | 73.54                 |
| 100%        |             | -10        | 5210042.58      | 42.58                 |
| 100%        |             | 0          | 5210021.83      | 21.83                 |
| 100%        |             | +10        | 5210089.68      | 89.68                 |
| 100%        |             | +30        | 5210074.72      | 74.72                 |
| 100%        |             | +40        | 5210067.20      | 67.20                 |
| 100%        |             | +50        | 5210044.18      | 44.18                 |
| Max         |             | 3.6        | +20             | 5210027.81            |
| Min         | 3.14        | +20        | 5210091.37      | 91.37                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5290035.66      | 35.66                 |
| 100%        |             | -30        | 5290050.98      | 50.98                 |
| 100%        |             | -20        | 5290070.56      | 70.56                 |
| 100%        |             | -10        | 5290005.76      | 5.76                  |
| 100%        |             | 0          | 5290089.11      | 89.11                 |
| 100%        |             | +10        | 5290015.21      | 15.21                 |
| 100%        |             | +30        | 5290014.23      | 14.23                 |
| 100%        |             | +40        | 5290004.88      | 4.88                  |
| 100%        |             | +50        | 5290053.38      | 53.38                 |
| Max         |             | 3.6        | +20             | 5290014.74            |
| Min         | 3.14        | +20        | 5290071.11      | 71.11                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5530060.74      | 60.74                 |
| 100%        |             | -30        | 5530013.38      | 13.38                 |
| 100%        |             | -20        | 5530069.09      | 69.09                 |
| 100%        |             | -10        | 5530098.22      | 98.22                 |
| 100%        |             | 0          | 5530041.54      | 41.54                 |
| 100%        |             | +10        | 5530020.78      | 20.78                 |
| 100%        |             | +30        | 5530052.62      | 52.62                 |
| 100%        |             | +40        | 5530040.63      | 40.63                 |
| 100%        |             | +50        | 5530095.50      | 95.50                 |
| Max         |             | 3.6        | +20             | 5530026.60            |
| Min         | 3.14        | +20        | 5530002.52      | 2.52                  |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.





OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5775083.36      | 83.36                 |
| 100%        |             | -30        | 5775077.10      | 77.10                 |
| 100%        |             | -20        | 5775070.64      | 70.64                 |
| 100%        |             | -10        | 5775085.65      | 85.65                 |
| 100%        |             | 0          | 5775090.50      | 90.5                  |
| 100%        |             | +10        | 5775087.13      | 87.13                 |
| 100%        |             | +30        | 5775096.88      | 96.88                 |
| 100%        |             | +40        | 5775094.57      | 94.57                 |
| 100%        |             | +50        | 5775097.02      | 97.02                 |
| Max         |             | 3.6        | +20             | 5775061.45            |
| Min         | 3.14        | +20        | 5775062.42      | 62.42                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



**10 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5210025.94      | 25.94                 |
| 100%        |             | -30        | 5210060.82      | 60.82                 |
| 100%        |             | -20        | 5210007.83      | 7.83                  |
| 100%        |             | -10        | 5210082.53      | 82.53                 |
| 100%        |             | 0          | 5210054.43      | 54.43                 |
| 100%        |             | +10        | 5210086.10      | 86.10                 |
| 100%        |             | +30        | 5210060.09      | 60.09                 |
| 100%        |             | +40        | 5210023.72      | 23.72                 |
| 100%        |             | +50        | 5210020.95      | 20.95                 |
| Max         |             | 3.6        | +20             | 5210032.98            |
| Min         | 3.14        | +20        | 5210091.70      | 91.70                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5290067.13      | 67.13                 |
| 100%        |             | -30        | 5290071.62      | 71.62                 |
| 100%        |             | -20        | 5290037.80      | 37.8                  |
| 100%        |             | -10        | 5290098.46      | 98.46                 |
| 100%        |             | 0          | 5290088.03      | 88.03                 |
| 100%        |             | +10        | 5290061.47      | 61.47                 |
| 100%        |             | +30        | 5290074.14      | 74.14                 |
| 100%        |             | +40        | 5290084.36      | 84.36                 |
| 100%        |             | +50        | 5290098.37      | 98.37                 |
| Max         |             | 3.6        | +20             | 5290082.56            |
| Min         | 3.14        | +20        | 5290083.55      | 83.55                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5530034.40      | 34.40                 |
| 100%        |             | -30        | 5530056.41      | 56.41                 |
| 100%        |             | -20        | 5530016.50      | 16.5                  |
| 100%        |             | -10        | 5530058.69      | 58.69                 |
| 100%        |             | 0          | 5530047.98      | 47.98                 |
| 100%        |             | +10        | 5530076.63      | 76.63                 |
| 100%        |             | +30        | 5530009.12      | 9.12                  |
| 100%        |             | +40        | 5530054.21      | 54.21                 |
| 100%        |             | +50        | 5530076.66      | 76.66                 |
| Max         |             | 3.6        | +20             | 5530011.51            |
| Min         | 3.14        | +20        | 5530066.68      | 66.68                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100%        | 3.3         | +20(Ref)   | 5775099.91      | 99.91                 |
| 100%        |             | -30        | 5775032.11      | 32.11                 |
| 100%        |             | -20        | 5775039.63      | 39.63                 |
| 100%        |             | -10        | 5775061.34      | 61.34                 |
| 100%        |             | 0          | 5775047.30      | 47.3                  |
| 100%        |             | +10        | 5775059.83      | 59.83                 |
| 100%        |             | +30        | 5775050.66      | 50.66                 |
| 100%        |             | +40        | 5775074.11      | 74.11                 |
| 100%        |             | +50        | 5775043.06      | 43.06                 |
| Max         |             | 3.6        | +20             | 5775077.03            |
| Min         | 3.14        | +20        | 5775071.28      | 71.28                 |

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



## 10.6 STRADDLE CHANNEL

### 10.6.1 26dB Bandwidth

[ANT1]

| Mode            | Band    | Frequency [MHz] | Channel | Measured Frequency [MHz] | 26dB Bandwidth [MHz] |
|-----------------|---------|-----------------|---------|--------------------------|----------------------|
| 802.11a         | UNII 2C | 5720            | 144     | 5710.08                  | 14.92                |
| 802.11n(HT20)   |         |                 |         | 5709.88                  | 15.12                |
| 802.11ac(VHT20) |         |                 |         | 5709.88                  | 15.12                |
| 802.11a         | UNII 3  | 5720            | 144     | 5729.72                  | 4.72                 |
| 802.11n(HT20)   |         |                 |         | 5729.96                  | 4.96                 |
| 802.11ac(VHT20) |         |                 |         | 5730.12                  | 5.12                 |

| Mode            | Band    | Frequency [MHz] | Channel | Measured Frequency [MHz] | 26dB Bandwidth [MHz] |
|-----------------|---------|-----------------|---------|--------------------------|----------------------|
| 802.11n(HT40)   | UNII 2C | 5710            | 142     | 5689.60                  | 35.40                |
| 802.11ac(VHT40) |         |                 |         | 5689.76                  | 35.24                |
| 802.11n(HT40)   | UNII 3  | 5710            | 142     | 5730.08                  | 5.08                 |
| 802.11ac(VHT40) |         |                 |         | 5730.16                  | 5.16                 |

| Mode            | Band    | Frequency [MHz] | Channel | Measured Frequency [MHz] | 26dB Bandwidth [MHz] |
|-----------------|---------|-----------------|---------|--------------------------|----------------------|
| 802.11ac(VHT80) | UNII 2C | 5690            | 138     | 5649.68                  | 75.32                |
|                 | UNII 3  | 5690            | 138     | 5730.44                  | 5.44                 |

**Note:**

[UNII 2C] 26dB Bandwidth = 5725MHz - Measured Frequency[MHz]

[UNII 3C] 26dB Bandwidth = Measured Frequency[MHz] -5725MHz



**[ANT2]**

| Mode            | Band    | Frequency [MHz] | Channel | Measured Frequency [MHz] | 26dB Bandwidth [MHz] |
|-----------------|---------|-----------------|---------|--------------------------|----------------------|
| 802.11a         | UNII 2C | 5720            | 144     | 5710.04                  | 14.92                |
| 802.11n(HT20)   |         |                 |         | 5710.00                  | 15.08                |
| 802.11ac(VHT20) |         |                 |         | 5709.84                  | 15.20                |
| 802.11a         | UNII 3  | 5720            | 144     | 5730.00                  | 4.84                 |
| 802.11n(HT20)   |         |                 |         | 5730.12                  | 4.84                 |
| 802.11ac(VHT20) |         |                 |         | 5730.24                  | 5.00                 |

| Mode            | Band    | Frequency [MHz] | Channel | Measured Frequency [MHz] | 26dB Bandwidth [MHz] |
|-----------------|---------|-----------------|---------|--------------------------|----------------------|
| 802.11n(HT40)   | UNII 2C | 5710            | 142     | 5689.92                  | 35.40                |
| 802.11ac(VHT40) |         |                 |         | 5689.68                  | 35.32                |
| 802.11n(HT40)   | UNII 3  | 5710            | 142     | 5730.00                  | 4.92                 |
| 802.11ac(VHT40) |         |                 |         | 5730.40                  | 5.16                 |

| Mode            | Band    | Frequency [MHz] | Channel | Measured Frequency [MHz] | 26dB Bandwidth [MHz] |
|-----------------|---------|-----------------|---------|--------------------------|----------------------|
| 802.11ac(VHT80) | UNII 2C | 5690            | 138     | 5649.44                  | 75.68                |
|                 | UNII 3  | 5690            | 138     | 5730.44                  | 5.44                 |

**Note:**

[UNII 2C] 26dB Bandwidth = 5725MHz - Measured Frequency[MHz]

[UNII 3C] 26dB Bandwidth = Measured Frequency[MHz] -5725MHz



[ANT1]

▣ Test Plots (26dB Bandwidth)

802.11a UNII Band



802.11n(HT20) UNII Band



802.11ac(VHT20) UNII Band






□ Test Plots (26dB Bandwidth)

802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band

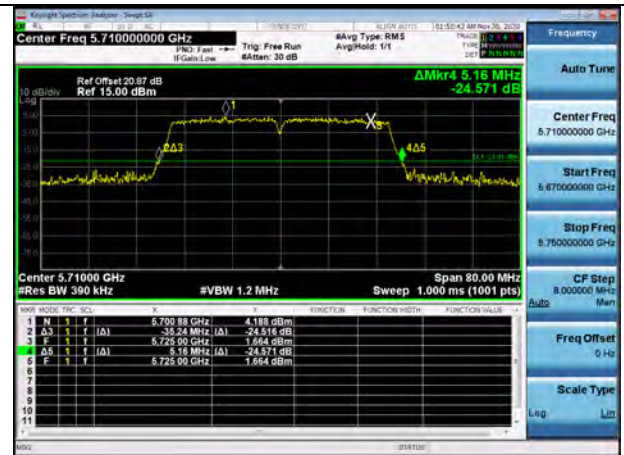

802.11ac(VHT80) UNII Band





[ANT2]

▣ Test Plots (26dB Bandwidth)

802.11a UNII Band



802.11n(HT20) UNII Band



802.11ac(VHT20) UNII Band





□ Test Plots (26dB Bandwidth)


802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band



802.11ac(VHT80) UNII Band

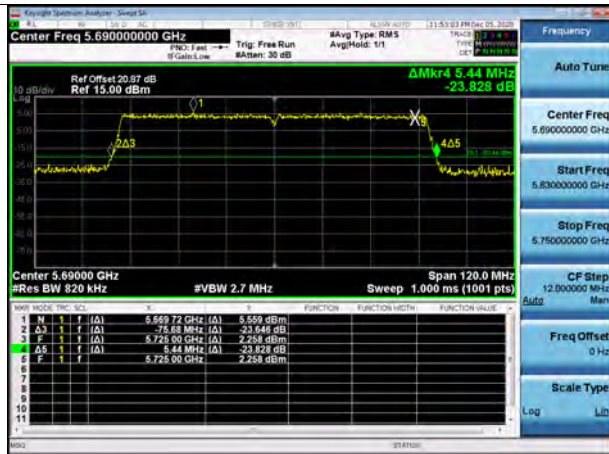

### 10.6.2 6dB Bandwidth

**[ANT1]**

| Mode            | Band   | Frequency [MHz] | Channel | Measured Frequency [MHz] | 6dB Bandwidth [MHz] | Limit [MHz] |
|-----------------|--------|-----------------|---------|--------------------------|---------------------|-------------|
| 802.11a         | UNII 3 | 5720            | 144     | 5728.12                  | 3.12                | > 0.5       |
| 802.11n(HT20)   |        |                 |         | 5728.76                  | 3.76                | > 0.5       |
| 802.11ac(VHT20) |        |                 |         | 5728.84                  | 3.84                | > 0.5       |

| Mode            | Band   | Frequency [MHz] | Channel | Measured Frequency [MHz] | 6dB Bandwidth [MHz] | Limit [MHz] |
|-----------------|--------|-----------------|---------|--------------------------|---------------------|-------------|
| 802.11n(HT40)   | UNII 3 | 5710            | 142     | 5728.16                  | 3.16                | > 0.5       |
| 802.11ac(VHT40) |        |                 |         | 5728.24                  | 3.24                | > 0.5       |

| Mode            | Band   | Frequency [MHz] | Channel | Measured Frequency [MHz] | 6dB Bandwidth [MHz] | Limit [MHz] |
|-----------------|--------|-----------------|---------|--------------------------|---------------------|-------------|
| 802.11ac(VHT80) | UNII 3 | 5690            | 138     | 5728.28                  | 3.28                | > 0.5       |

**Note:**

6dB Bandwidth = Measured Frequency[MHz] - 5725MHz



**[ANT2]**

| Mode            | Band   | Frequency [MHz] | Channel | Measured Frequency [MHz] | 6dB Bandwidth [MHz] | Limit [MHz] |
|-----------------|--------|-----------------|---------|--------------------------|---------------------|-------------|
| 802.11a         | UNII 3 | 5720            | 144     | 5728.12                  | 3.12                | > 0.5       |
| 802.11n(HT20)   |        |                 |         | 5728.76                  | 3.76                | > 0.5       |
| 802.11ac(VHT20) |        |                 |         | 5728.84                  | 3.84                | > 0.5       |

| Mode            | Band   | Frequency [MHz] | Channel | Measured Frequency [MHz] | 6dB Bandwidth [MHz] | Limit [MHz] |
|-----------------|--------|-----------------|---------|--------------------------|---------------------|-------------|
| 802.11n(HT40)   | UNII 3 | 5710            | 142     | 5728.24                  | 3.24                | > 0.5       |
| 802.11ac(VHT40) |        |                 |         | 5728.24                  | 3.24                | > 0.5       |

| Mode            | Band   | Frequency [MHz] | Channel | Measured Frequency [MHz] | 6dB Bandwidth [MHz] | Limit [MHz] |
|-----------------|--------|-----------------|---------|--------------------------|---------------------|-------------|
| 802.11ac(VHT80) | UNII 3 | 5690            | 138     | 5728.28                  | 3.28                | > 0.5       |

**Note:**


6dB Bandwidth = Measured Frequency[MHz] – 5725MHz



[ANT1]

- ▣ Test Plots(UNII 3 Band 6dB Bandwidth)

802.11a CH.144

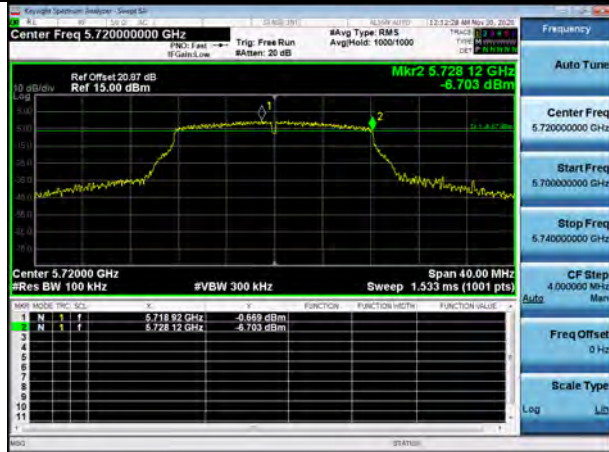

802.11n\_HT20 CH.144




802.11ac\_VHT20 CH.144






802.11n\_HT40 CH.142

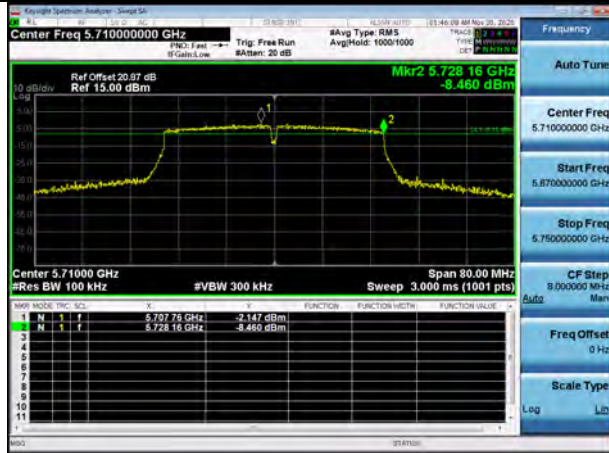

802.11ac\_VHT40 CH.142




802.11ac\_VHT80 CH.138

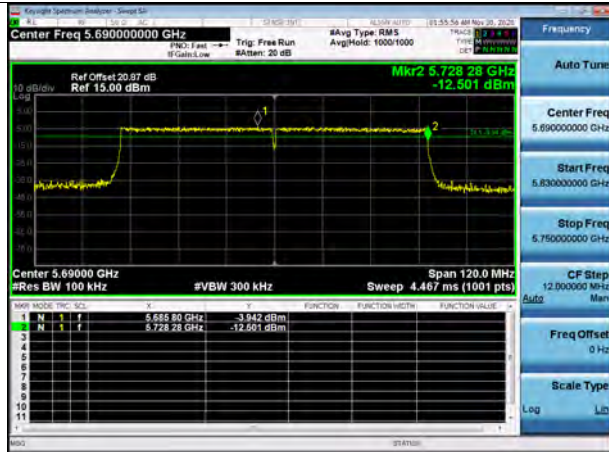

[ANT2]

- ▣ Test Plots(UNII 3 Band 6dB Bandwidth)


802.11a CH.144

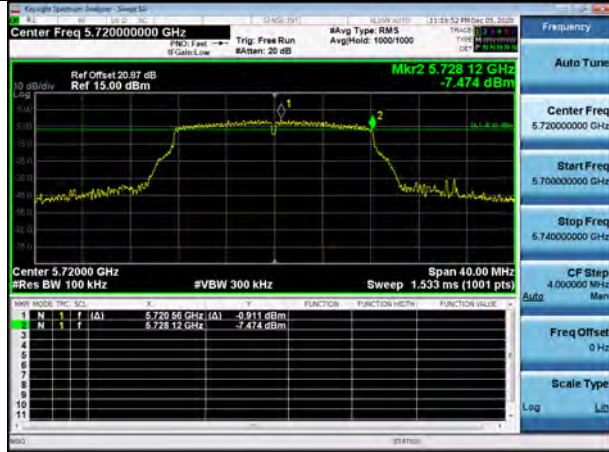

802.11n\_HT20 CH.144



802.11ac\_VHT20 CH.144

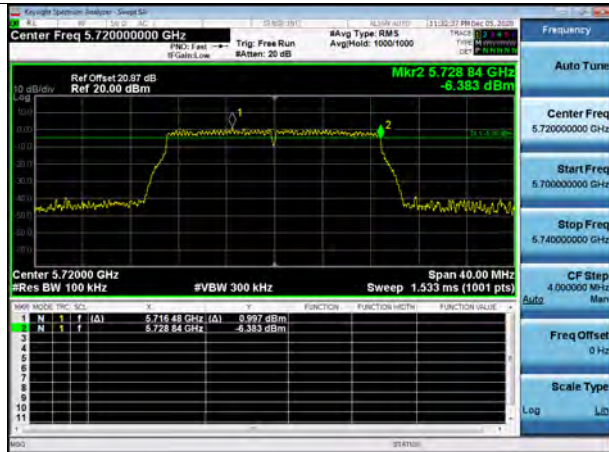







802.11n\_HT40 CH.142



802.11ac\_VHT40 CH.142

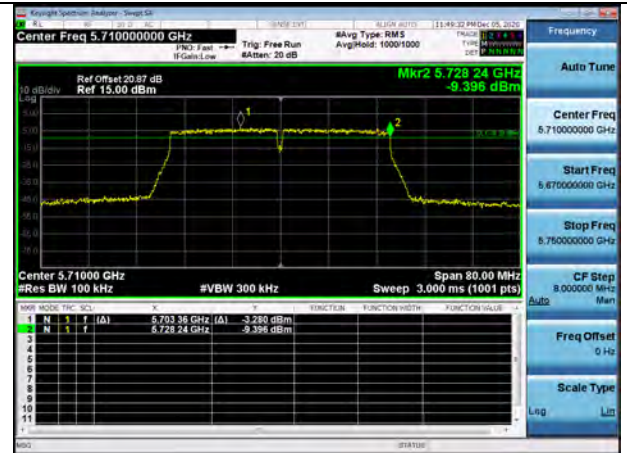

802.11ac\_VHT80 CH.138

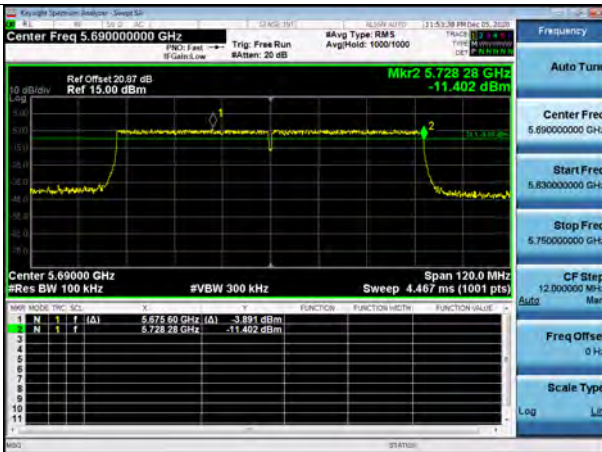



### 10.6.3 Output Power

**[ANT1]**

| Mode            | Frequency [MHz]        | Channel | Total Power (dBm) | Limit (dBm) |
|-----------------|------------------------|---------|-------------------|-------------|
| 802.11a         | 5720<br>(UNII 2C Band) | 144     | 13.61             | 22.74       |
| 802.11n(HT20)   |                        |         | 14.05             | 22.80       |
| 802.11ac(VHT20) |                        |         | 14.21             | 22.80       |
| 802.11a         | 5720<br>(UNII 3 Band)  | 144     | 5.73              | 30.00       |
| 802.11n(HT20)   |                        |         | 6.63              | 30.00       |
| 802.11ac(VHT20) |                        |         | 7.91              | 30.00       |

| Mode            | Frequency [MHz]        | Channel | Total Power (dBm) | Limit (dBm) |
|-----------------|------------------------|---------|-------------------|-------------|
| 802.11n(HT40)   | 5710<br>(UNII 2C Band) | 142     | 14.54             | 23.98       |
| 802.11ac(VHT40) |                        |         | 14.77             | 23.98       |
| 802.11n(HT40)   | 5710<br>(UNII 3 Band)  | 142     | 2.50              | 30.00       |
| 802.11ac(VHT40) |                        |         | 3.56              | 30.00       |

| Mode            | Frequency [MHz]        | Channel | Total Power (dBm) | Limit (dBm) |
|-----------------|------------------------|---------|-------------------|-------------|
| 802.11ac(VHT80) | 5690<br>(UNII 2C Band) | 138     | 16.48             | 23.98       |
|                 | 5690<br>(UNII 3 Band)  | 138     | 2.89              | 30.00       |



[ANT2]

| Mode            | Frequency [MHz]        | Channel | Total Power (dBm) | Limit (dBm) |
|-----------------|------------------------|---------|-------------------|-------------|
| 802.11a         | 5720<br>(UNII 2C Band) | 144     | 10.73             | 22.74       |
| 802.11n(HT20)   |                        |         | 12.57             | 22.78       |
| 802.11ac(VHT20) |                        |         | 11.74             | 22.82       |
| 802.11a         | 5720<br>(UNII 3 Band)  | 144     | 2.80              | 30.00       |
| 802.11n(HT20)   |                        |         | 5.16              | 30.00       |
| 802.11ac(VHT20) |                        |         | 5.51              | 30.00       |

| Mode            | Frequency [MHz]        | Channel | Total Power (dBm) | Limit (dBm) |
|-----------------|------------------------|---------|-------------------|-------------|
| 802.11n(HT40)   | 5710<br>(UNII 2C Band) | 142     | 11.04             | 23.98       |
| 802.11ac(VHT40) |                        |         | 11.44             | 23.98       |
| 802.11n(HT40)   | 5710<br>(UNII 3 Band)  | 142     | -0.96             | 30.00       |
| 802.11ac(VHT40) |                        |         | 0.33              | 30.00       |


| Mode            | Frequency [MHz]        | Channel | Total Power (dBm) | Limit (dBm) |
|-----------------|------------------------|---------|-------------------|-------------|
| 802.11ac(VHT80) | 5690<br>(UNII 2C Band) | 138     | 13.83             | 23.98       |
|                 | 5690<br>(UNII 3 Band)  | 138     | 0.24              | 30.00       |

Test Plots [ANT1]


802.11a UNII 2C Band




802.11a UNII 3 Band

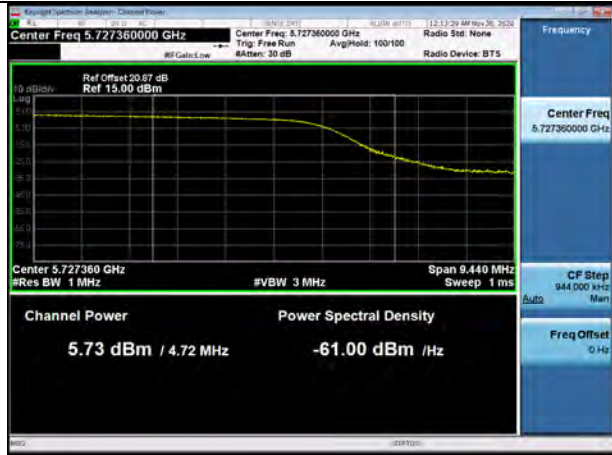

802.11n(HT20) UNII 2C Band

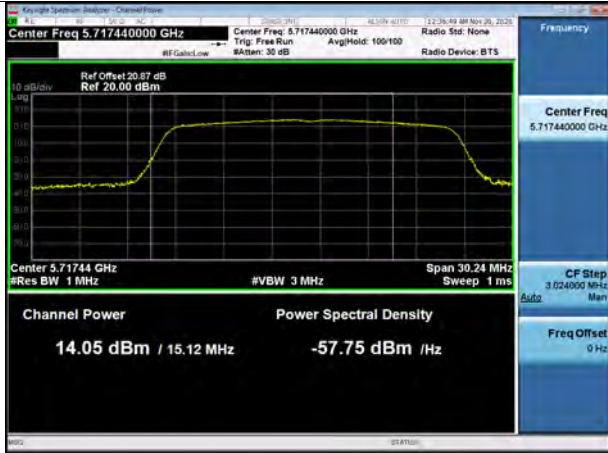

802.11n(HT20) UNII 3 Band

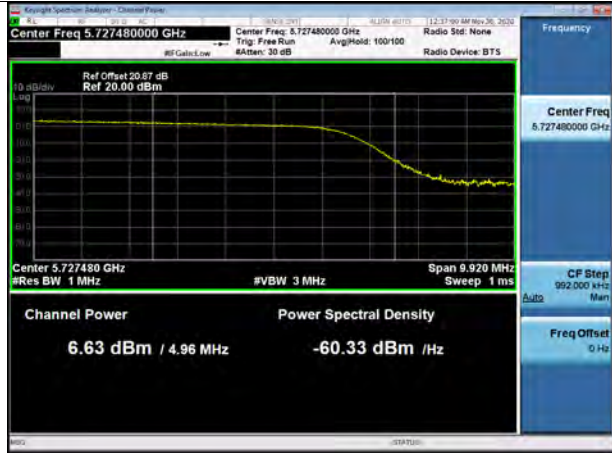

802.11ac(VHT20) UNII 2C Band




802.11ac(VHT20) UNII 3 Band







802.11n(HT40) UNII 2C Band

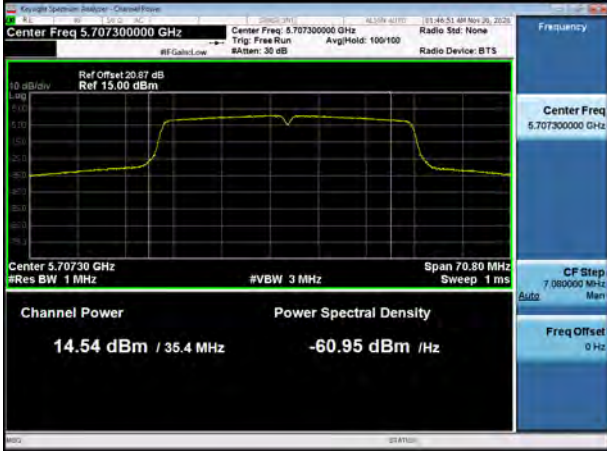


802.11n(HT40) UNII 3 Band



802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band

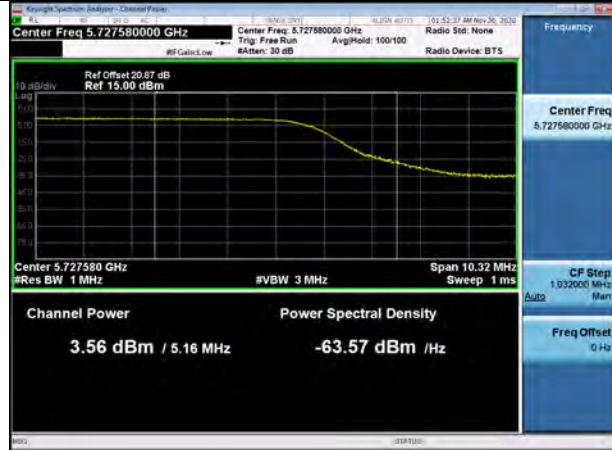

802.11ac(VHT80) UNII 2C Band




802.11ac(VHT80) UNII 3 Band



Test Plots [ANT2]

802.11a UNII 2C Band

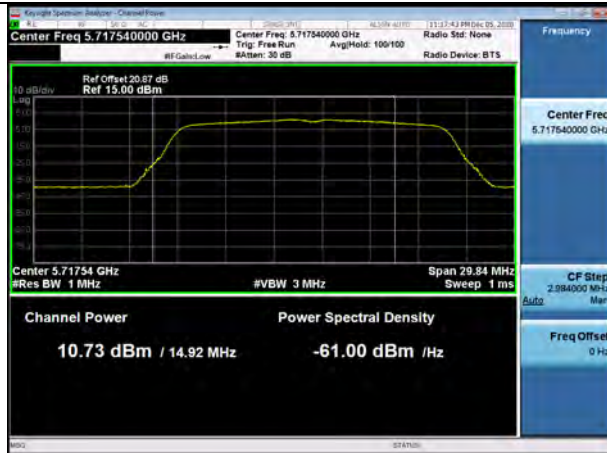

802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band




802.11n(HT20) UNII 3 Band



802.11ac(VHT20) UNII 2C Band

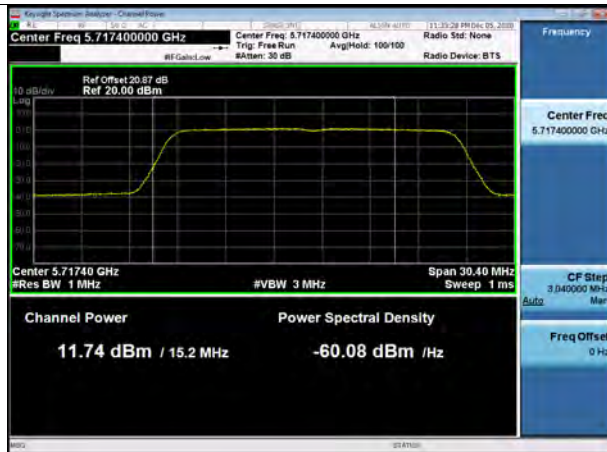


802.11ac(VHT20) UNII 3 Band

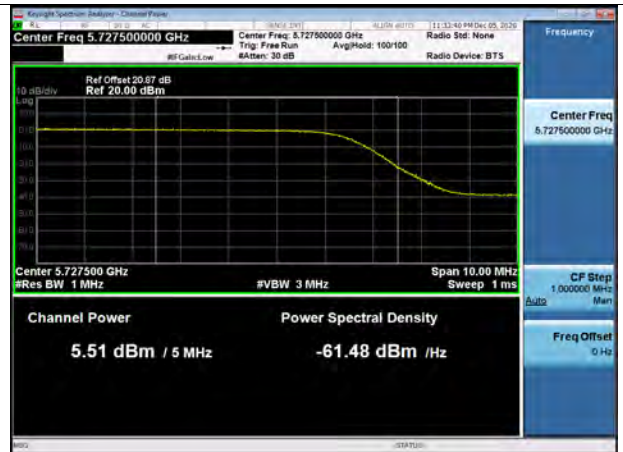




802.11n(HT40) UNII 2C Band

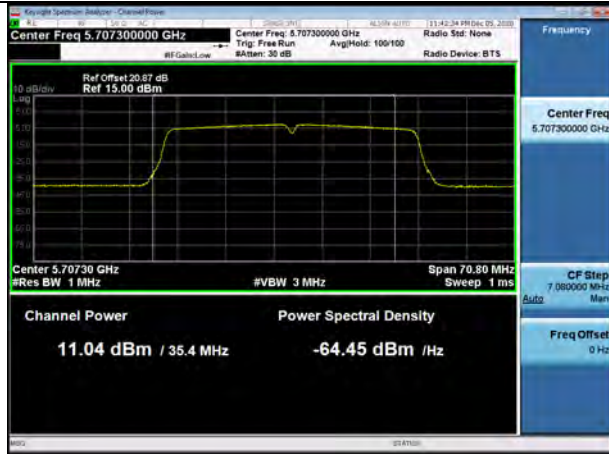


802.11n(HT40) UNII 3 Band

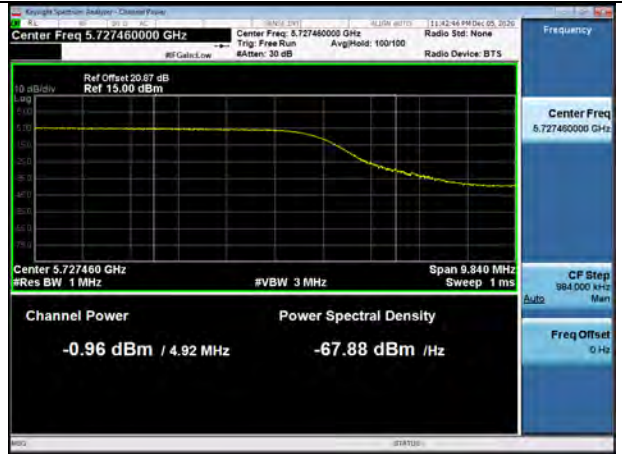


802.11ac(VHT40) UNII 2C Band




802.11ac(VHT40) UNII 3 Band

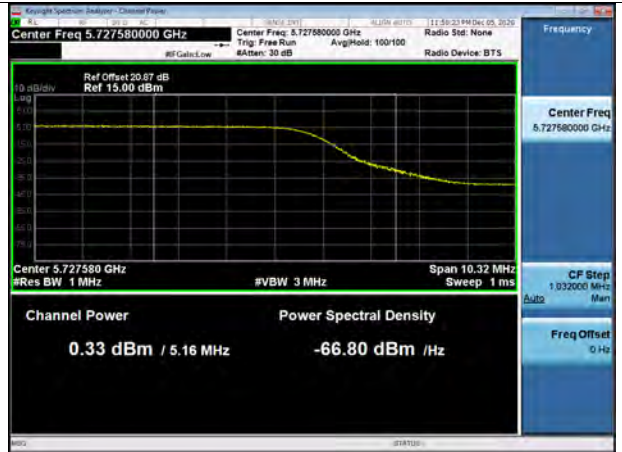

802.11ac(VHT80) UNII 2C Band

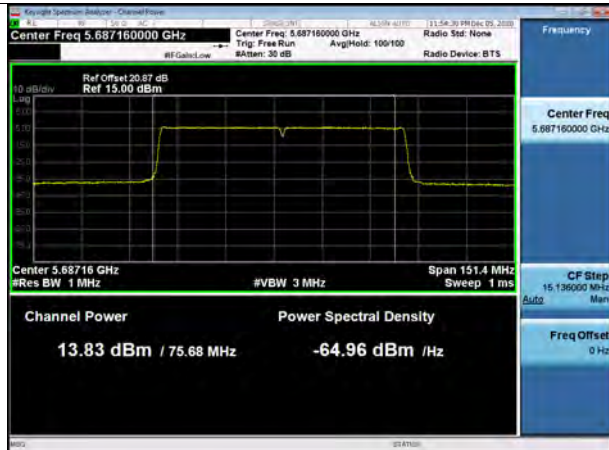

802.11ac(VHT80) UNII 3 Band

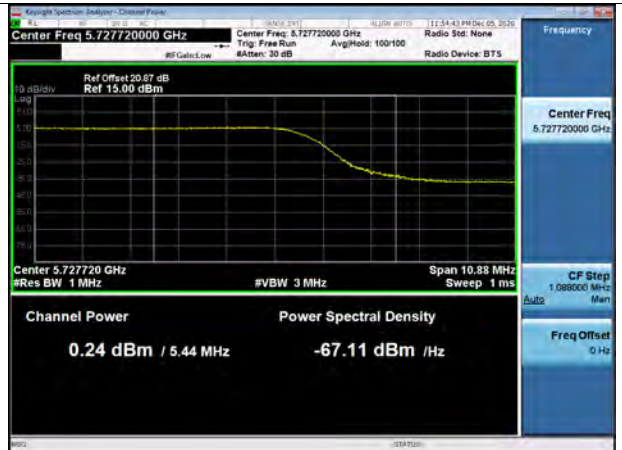



### 10.6.4 Power Spectral Density

[ANT1]

| Mode            | Frequency [MHz]        | Channel | Total PSD (dBm/MHz) | Limit      |
|-----------------|------------------------|---------|---------------------|------------|
| 802.11a         | 5720<br>(UNII 2C Band) | 144     | 4.032               | 11 dBm/MHz |
| 802.11n(HT20)   |                        |         | 4.475               |            |
| 802.11ac(VHT20) |                        |         | 4.100               |            |

| Mode            | Frequency [MHz]       | Channel | Total PSD (dBm/500kHz) | Limit         |
|-----------------|-----------------------|---------|------------------------|---------------|
| 802.11a         | 5720<br>(UNII 3 Band) | 144     | -0.738                 | 30 dBm/500kHz |
| 802.11n(HT20)   |                       |         | -0.426                 |               |
| 802.11ac(VHT20) |                       |         | 0.810                  |               |

| Mode            | Frequency [MHz]        | Channel | Total PSD (dBm/MHz) | Limit      |
|-----------------|------------------------|---------|---------------------|------------|
| 802.11n(HT40)   | 5710<br>(UNII 2C Band) | 142     | 1.068               | 11 dBm/MHz |
| 802.11ac(VHT40) |                        |         | 0.996               |            |

| Mode            | Frequency [MHz]       | Channel | Total PSD (dBm/500kHz) | Limit         |
|-----------------|-----------------------|---------|------------------------|---------------|
| 802.11n(HT40)   | 5710<br>(UNII 3 Band) | 142     | -4.532                 | 30 dBm/500kHz |
| 802.11ac(VHT40) |                       |         | -3.348                 |               |





| Mode            | Frequency [MHz]        | Channel | Total PSD<br>(dBm/MHz) | Limit      |
|-----------------|------------------------|---------|------------------------|------------|
| 802.11ac(VHT80) | 5690<br>(UNII 2C Band) | 138     | -1.052                 | 11 dBm/MHz |

| Mode            | Frequency [MHz]       | Channel | Total PSD<br>(dBm/500kHz) | Limit         |
|-----------------|-----------------------|---------|---------------------------|---------------|
| 802.11ac(VHT80) | 5690<br>(UNII 3 Band) | 138     | -4.239                    | 30 dBm/500kHz |



[ANT2]

| Mode            | Frequency [MHz]        | Channel | Total PSD (dBm/MHz) | Limit      |
|-----------------|------------------------|---------|---------------------|------------|
| 802.11a         | 5720<br>(UNII 2C Band) | 144     | 1.018               | 11 dBm/MHz |
| 802.11n(HT20)   |                        |         | 2.861               |            |
| 802.11ac(VHT20) |                        |         | 1.472               |            |
| 802.11n(HT20)   |                        |         | -1.583              |            |
| 802.11ac(VHT20) |                        |         | -2.198              |            |

| Mode            | Frequency [MHz]       | Channel | Total PSD (dBm/500kHz) | Limit         |
|-----------------|-----------------------|---------|------------------------|---------------|
| 802.11a         | 5720<br>(UNII 3 Band) | 144     | -3.530                 | 30 dBm/500kHz |
| 802.11n(HT20)   |                       |         | -1.583                 |               |
| 802.11ac(VHT20) |                       |         | -2.198                 |               |

| Mode            | Frequency [MHz]        | Channel | Total PSD (dBm/MHz) | Limit      |
|-----------------|------------------------|---------|---------------------|------------|
| 802.11n(HT40)   | 5710<br>(UNII 2C Band) | 142     | -2.501              | 11 dBm/MHz |
| 802.11ac(VHT40) |                        |         | -2.442              |            |
| 802.11ac(VHT40) |                        |         | -6.636              |            |

| Mode            | Frequency [MHz]       | Channel | Total PSD (dBm/500kHz) | Limit         |
|-----------------|-----------------------|---------|------------------------|---------------|
| 802.11ac(VHT40) | 5710<br>(UNII 3 Band) | 142     | -2.442                 | 30 dBm/500kHz |
| 802.11n(HT40)   |                       |         | -7.747                 |               |
| 802.11ac(VHT40) |                       |         | -6.636                 |               |



| Mode            | Frequency [MHz]        | Channel | Total PSD (dBm/MHz) | Limit      |
|-----------------|------------------------|---------|---------------------|------------|
| 802.11ac(VHT80) | 5690<br>(UNII 2C Band) | 138     | -3.745              | 11 dBm/MHz |

| Mode            | Frequency [MHz]       | Channel | Total PSD (dBm/500kHz) | Limit         |
|-----------------|-----------------------|---------|------------------------|---------------|
| 802.11ac(VHT80) | 5690<br>(UNII 3 Band) | 138     | -6.859                 | 30 dBm/500kHz |

Test Plots\_[ANT1]


802.11a UNII 2C Band



802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band

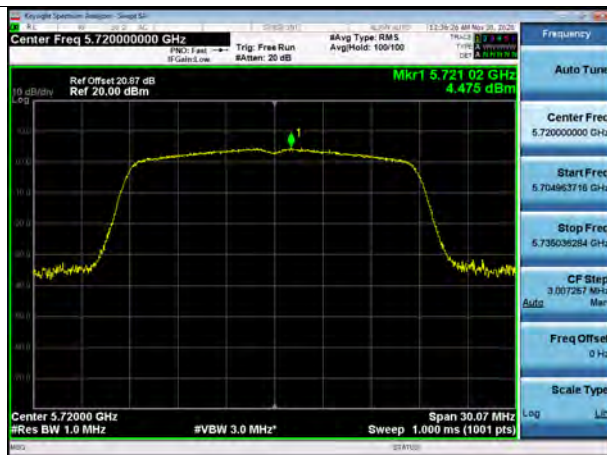


802.11n(HT20) UNII 3 Band




802.11ac(VHT20) UNII 2C Band

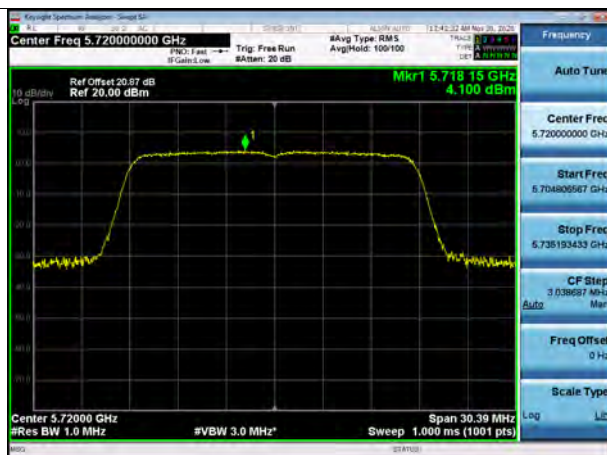


802.11ac(VHT20) UNII 3 Band

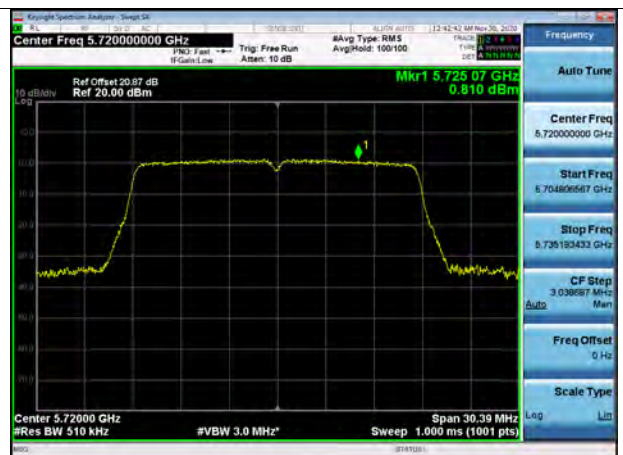

802.11n(HT40) UNII 2C Band

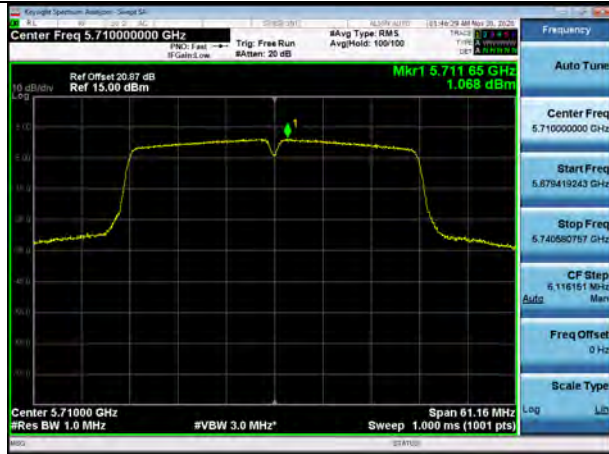


802.11n(HT40) UNII 3 Band

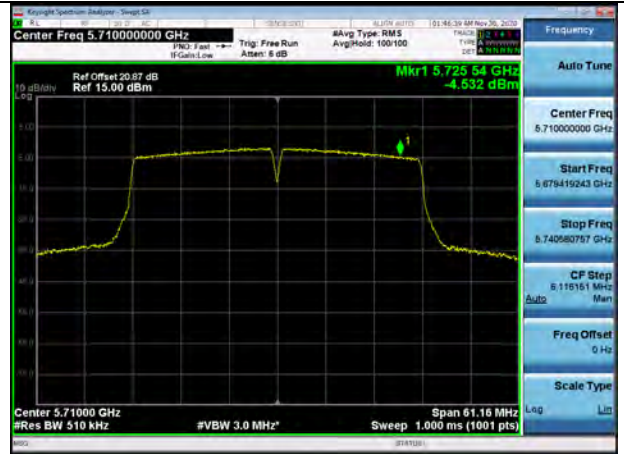


802.11ac(VHT40) UNII 2C Band




802.11ac(VHT40) UNII 3 Band

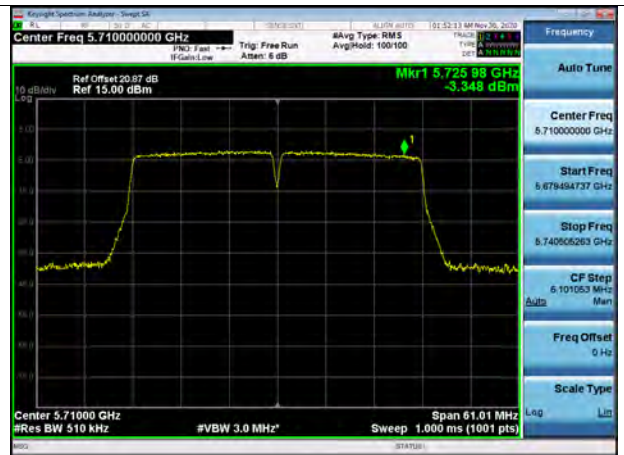

802.11ac(VHT80) UNII 2C Band

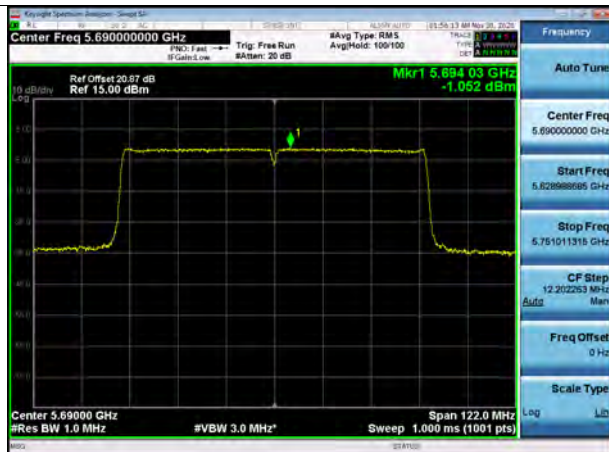

802.11ac(VHT80) UNII 3 Band

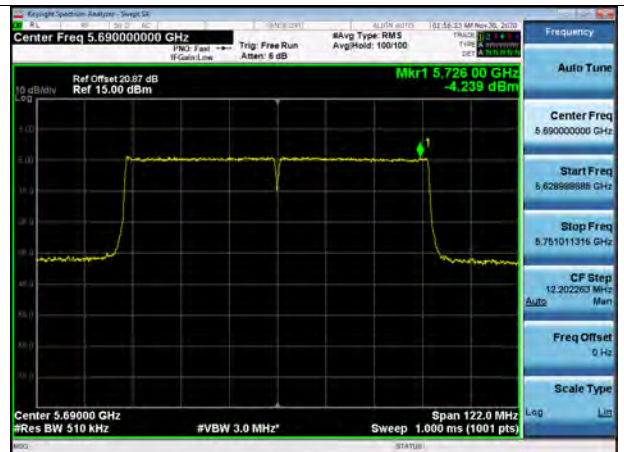



Test Plots\_[ANT2]

802.11a UNII 2C Band



802.11a UNII 3 Band



802.11n(HT20) UNII 2C Band



802.11n(HT20) UNII 3 Band




802.11ac(VHT20) UNII 2C Band




802.11ac(VHT20) UNII 3 Band




802.11n(HT40) UNII 2C Band

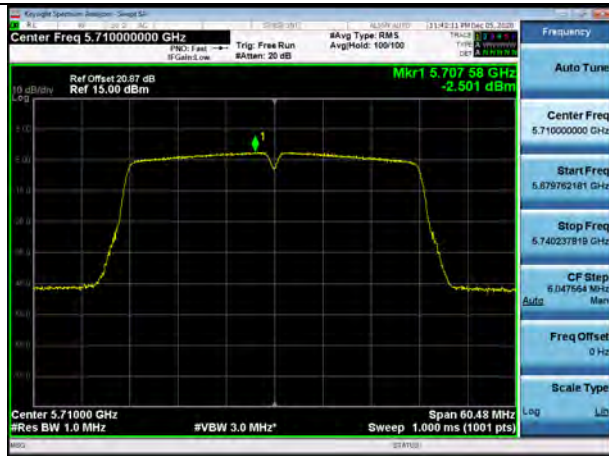


802.11n(HT40) UNII 3 Band

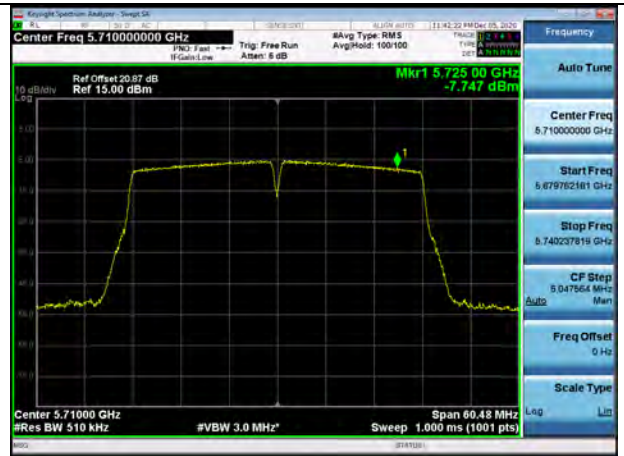


802.11ac(VHT40) UNII 2C Band

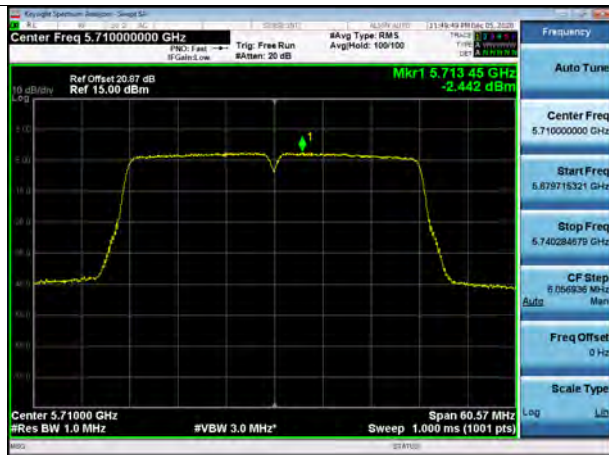


802.11ac(VHT40) UNII 3 Band

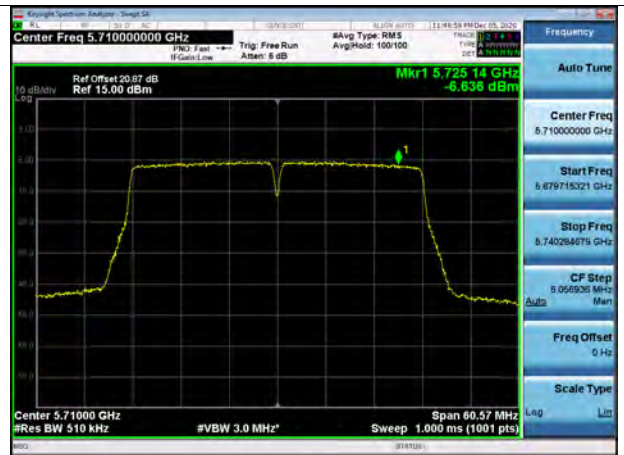

802.11ac(VHT80) UNII 2C Band

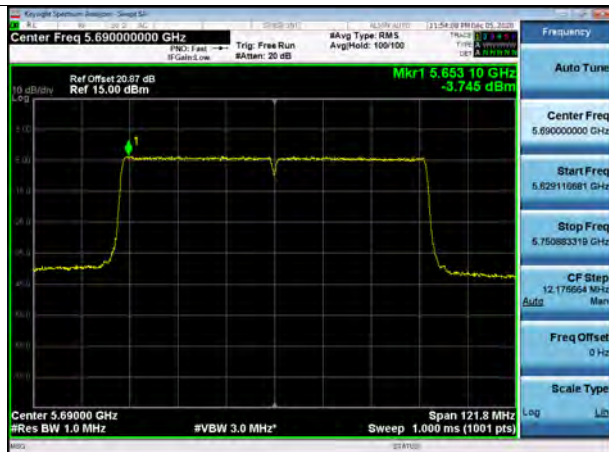

802.11ac(VHT80) UNII 3 Band

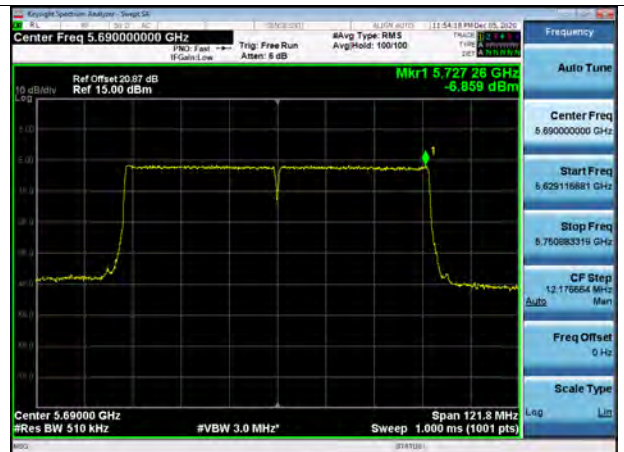



### 10.7 RADIATED SPURIOUS EMISSIONS

#### Frequency Range : 9 kHz – 30MHz

| Frequency | Reading | Ant. factor | Cable loss | Ant. POL | Total  | Limit  | Margin |
|-----------|---------|-------------|------------|----------|--------|--------|--------|
| MHz       | dBuV/m  | dBm/m       | dBm        | (H/V)    | dBuV/m | dBuV/m | dB     |

No Critical peaks found

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

#### Frequency Range : Below 1 GHz

| Frequency | Reading | Ant. factor | Cable loss | Ant. POL | Total  | Limit  | Margin |
|-----------|---------|-------------|------------|----------|--------|--------|--------|
| MHz       | dBuV/m  | dBm/m       | dBm        | (H/V)    | dBuV/m | dBuV/m | dB     |

No Critical peaks found

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode





**Frequency Range : Above 1 GHz**

|                     |          |
|---------------------|----------|
| Band :              | UNII 1   |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5180 MHz |
| Channel No.         | 36 Ch    |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10360     | 54.62   | 5.63         | V        | 60.25    | 68.20    | 7.95   | PK     |
| 15540     | 48.21   | 6.11         | V        | 54.32    | 73.98    | 19.66  | PK     |
| 15540     | 34.40   | 6.11         | V        | 40.51    | 53.98    | 13.47  | AV     |
| 10360     | 55.41   | 5.63         | H        | 61.04    | 68.20    | 7.16   | PK     |
| 15540     | 47.59   | 6.11         | H        | 53.70    | 73.98    | 20.28  | PK     |
| 15540     | 33.72   | 6.11         | H        | 39.83    | 53.98    | 14.15  | AV     |

|                     |          |
|---------------------|----------|
| Band :              | UNII 1   |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5200 MHz |
| Channel No.         | 40 Ch    |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10400     | 56.58   | 5.06         | V        | 61.64    | 68.20    | 6.56   | PK     |
| 15600     | 48.18   | 4.93         | V        | 53.11    | 73.98    | 20.87  | PK     |
| 15600     | 34.17   | 4.93         | V        | 39.10    | 53.98    | 14.88  | AV     |
| 10400     | 57.08   | 5.06         | H        | 62.14    | 68.20    | 6.06   | PK     |
| 15600     | 48.01   | 4.93         | H        | 52.94    | 73.98    | 21.04  | PK     |
| 15600     | 33.89   | 4.93         | H        | 38.82    | 53.98    | 15.16  | AV     |



|                     |          |
|---------------------|----------|
| Band :              | UNII 1   |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5240 MHz |
| Channel No.         | 48 Ch    |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10480     | 50.88   | 5.81         | V        | 56.69    | 68.20    | 11.51  | PK     |
| 15720     | 48.31   | 4.48         | V        | 52.79    | 73.98    | 21.19  | PK     |
| 15720     | 34.06   | 4.48         | V        | 38.54    | 53.98    | 15.44  | AV     |
| 10480     | 51.91   | 5.81         | H        | 57.72    | 68.20    | 10.48  | PK     |
| 15720     | 47.39   | 4.48         | H        | 51.87    | 73.98    | 22.11  | PK     |
| 15720     | 33.85   | 4.48         | H        | 38.33    | 53.98    | 15.65  | AV     |

|                     |          |
|---------------------|----------|
| Band :              | UNII 2A  |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5260 MHz |
| Channel No.         | 52 Ch    |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10520     | 53.20   | 5.64         | V        | 58.84    | 68.20    | 9.36   | PK     |
| 15780     | 47.03   | 5.17         | V        | 52.20    | 73.98    | 21.78  | PK     |
| 15780     | 33.26   | 5.17         | V        | 38.43    | 53.98    | 15.55  | AV     |
| 10520     | 52.48   | 5.64         | H        | 58.12    | 68.20    | 10.08  | PK     |
| 15780     | 48.17   | 5.17         | H        | 53.34    | 73.98    | 20.64  | PK     |
| 15780     | 34.17   | 5.17         | H        | 39.34    | 53.98    | 14.64  | AV     |



|                     |          |
|---------------------|----------|
| Band :              | UNII 2A  |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5300 MHz |
| Channel No.         | 60 Ch    |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10600     | 54.47   | 5.90         | V        | 60.37    | 73.98    | 13.61  | PK     |
| 10600     | 40.17   | 5.90         | V        | 46.07    | 53.98    | 7.91   | AV     |
| 15900     | 46.90   | 5.96         | V        | 52.86    | 73.98    | 21.12  | PK     |
| 15900     | 33.16   | 5.96         | V        | 39.12    | 53.98    | 14.86  | AV     |
| 10600     | 53.39   | 5.90         | H        | 59.29    | 73.98    | 14.69  | PK     |
| 10600     | 39.57   | 5.90         | H        | 45.47    | 53.98    | 8.51   | AV     |
| 15900     | 49.00   | 5.96         | H        | 54.96    | 73.98    | 19.02  | PK     |
| 15900     | 34.76   | 5.96         | H        | 40.72    | 53.98    | 13.26  | AV     |

|                     |          |
|---------------------|----------|
| Band :              | UNII 2A  |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5320 MHz |
| Channel No.         | 64 Ch    |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10640     | 57.12   | 6.01         | V        | 63.13    | 73.98    | 10.85  | PK     |
| 10640     | 41.86   | 6.01         | V        | 47.87    | 53.98    | 6.11   | AV     |
| 15960     | 48.15   | 5.20         | V        | 53.35    | 73.98    | 20.63  | PK     |
| 15960     | 34.74   | 5.20         | V        | 39.94    | 53.98    | 14.04  | AV     |
| 10640     | 56.42   | 6.01         | H        | 62.43    | 73.98    | 11.55  | PK     |
| 10640     | 40.68   | 6.01         | H        | 46.69    | 53.98    | 7.29   | AV     |
| 15960     | 50.35   | 5.20         | H        | 55.55    | 73.98    | 18.43  | PK     |
| 15960     | 35.83   | 5.20         | H        | 41.03    | 53.98    | 12.95  | AV     |



|                     |          |
|---------------------|----------|
| Band :              | UNII 2C  |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5500 MHz |
| Channel No.         | 100 Ch   |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11000     | 46.58   | 6.10         | V        | 52.68    | 73.98    | 21.30  | PK     |
| 11000     | 33.38   | 6.10         | V        | 39.48    | 53.98    | 14.50  | AV     |
| 16500     | 45.80   | 7.83         | V        | 53.63    | 68.20    | 14.57  | PK     |
| 11000     | 49.24   | 6.10         | H        | 55.34    | 73.98    | 18.64  | PK     |
| 11000     | 34.49   | 6.10         | H        | 40.59    | 53.98    | 13.39  | AV     |
| 16500     | 44.66   | 7.83         | H        | 52.49    | 68.20    | 15.71  | PK     |

|                     |          |
|---------------------|----------|
| Band :              | UNII 2C  |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5580 MHz |
| Channel No.         | 116 Ch   |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11160     | 47.13   | 5.39         | V        | 52.52    | 73.98    | 21.46  | PK     |
| 11160     | 33.31   | 5.39         | V        | 38.70    | 53.98    | 15.28  | AV     |
| 16740     | 44.27   | 9.32         | V        | 53.59    | 68.20    | 14.61  | PK     |
| 11160     | 46.75   | 5.39         | H        | 52.14    | 73.98    | 21.84  | PK     |
| 11160     | 32.97   | 5.39         | H        | 38.36    | 53.98    | 15.62  | AV     |
| 16740     | 44.47   | 9.32         | H        | 53.79    | 68.20    | 14.41  | PK     |



Band : UNII 2C  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5720 MHz  
 Channel No. 144 Ch

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11440     | 45.84   | 6.02         | V        | 51.86    | 73.98    | 22.12  | PK     |
| 11440     | 32.32   | 6.02         | V        | 38.34    | 53.98    | 15.64  | AV     |
| 17160     | 44.21   | 9.78         | V        | 53.99    | 68.20    | 14.21  | PK     |
| 11440     | 44.98   | 6.02         | H        | 51.00    | 73.98    | 22.98  | PK     |
| 11440     | 32.24   | 6.02         | H        | 38.26    | 53.98    | 15.72  | AV     |
| 17160     | 43.68   | 9.78         | H        | 53.46    | 68.20    | 14.74  | PK     |

Band : UNII 3  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5745MHz  
 Channel No. 149 Ch

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11490     | 47.57   | 6.06         | V        | 53.63    | 73.98    | 20.35  | PK     |
| 11490     | 34.03   | 6.06         | V        | 40.09    | 53.98    | 13.89  | AV     |
| 17235     | 45.08   | 10.88        | V        | 55.96    | 68.20    | 12.24  | PK     |
| 11490     | 46.67   | 6.06         | H        | 52.73    | 73.98    | 21.25  | PK     |
| 11490     | 33.27   | 6.06         | H        | 39.33    | 53.98    | 14.65  | AV     |
| 17235     | 46.35   | 10.88        | H        | 57.23    | 68.20    | 10.97  | PK     |



|                     |          |
|---------------------|----------|
| Band :              | UNII 3   |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5785 MHz |
| Channel No.         | 157 Ch   |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11570     | 46.18   | 6.77         | V        | 52.95    | 73.98    | 21.03  | PK     |
| 11570     | 32.06   | 6.77         | V        | 38.83    | 53.98    | 15.15  | AV     |
| 17355     | 47.13   | 11.73        | V        | 58.86    | 68.20    | 9.34   | PK     |
| 11570     | 46.82   | 6.77         | H        | 53.59    | 73.98    | 20.39  | PK     |
| 11570     | 32.89   | 6.77         | H        | 39.66    | 53.98    | 14.32  | AV     |
| 17355     | 47.71   | 10.98        | H        | 58.69    | 68.20    | 9.51   | PK     |

|                     |          |
|---------------------|----------|
| Band :              | UNII 3   |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5825 MHz |
| Channel No.         | 165 Ch   |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11650     | 46.93   | 6.38         | V        | 53.31    | 73.98    | 20.67  | PK     |
| 11650     | 33.24   | 6.38         | V        | 39.62    | 53.98    | 14.36  | AV     |
| 17475     | 48.75   | 11.29        | V        | 60.04    | 68.20    | 8.16   | PK     |
| 11650     | 47.73   | 6.38         | H        | 54.11    | 73.98    | 19.87  | PK     |
| 11650     | 34.07   | 6.38         | H        | 40.45    | 53.98    | 13.53  | AV     |
| 17475     | 49.52   | 11.29        | H        | 60.81    | 68.20    | 7.39   | PK     |



|                     |               |
|---------------------|---------------|
| Band :              | UNII 1        |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer Rate:      | 6.5 Mbps      |
| Operating Frequency | 5180 MHz      |
| Channel No.         | 36 Ch         |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10360     | 54.20   | 5.63         | V        | 59.83    | 68.20    | 8.37   | PK     |
| 15540     | 48.23   | 6.11         | V        | 54.34    | 73.98    | 19.64  | PK     |
| 15540     | 34.06   | 6.11         | V        | 40.17    | 53.98    | 13.81  | AV     |
| 10360     | 55.14   | 5.63         | H        | 60.77    | 68.20    | 7.43   | PK     |
| 15540     | 48.07   | 6.11         | H        | 54.18    | 73.98    | 19.80  | PK     |
| 15540     | 33.84   | 6.11         | H        | 39.95    | 53.98    | 14.03  | AV     |

|                     |               |
|---------------------|---------------|
| Band :              | UNII 2A       |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer Rate:      | 6.5 Mbps      |
| Operating Frequency | 5260 MHz      |
| Channel No.         | 52 Ch         |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10520     | 53.98   | 5.64         | V        | 59.62    | 68.20    | 8.58   | PK     |
| 15780     | 47.76   | 5.17         | V        | 52.93    | 73.98    | 21.05  | PK     |
| 15780     | 33.70   | 5.17         | V        | 38.87    | 53.98    | 15.11  | AV     |
| 10520     | 52.88   | 5.64         | H        | 58.52    | 68.20    | 9.68   | PK     |
| 15780     | 51.43   | 5.17         | H        | 56.60    | 73.98    | 17.38  | PK     |
| 15780     | 37.01   | 5.17         | H        | 42.18    | 53.98    | 11.80  | AV     |





|                     |               |
|---------------------|---------------|
| Band :              | UNII 2A       |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer Rate:      | 6.5 Mbps      |
| Operating Frequency | 5300 MHz      |
| Channel No.         | 60 Ch         |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10600     | 53.78   | 5.90         | V        | 59.68    | 73.98    | 14.30  | PK     |
| 10600     | 39.93   | 5.90         | V        | 45.83    | 53.98    | 8.15   | AV     |
| 15900     | 47.43   | 5.96         | V        | 53.39    | 73.98    | 20.59  | PK     |
| 15900     | 33.64   | 5.96         | V        | 39.60    | 53.98    | 14.38  | AV     |
| 10600     | 52.75   | 5.90         | H        | 58.65    | 73.98    | 15.33  | PK     |
| 10600     | 38.64   | 5.90         | H        | 44.54    | 53.98    | 9.44   | AV     |
| 15900     | 50.22   | 5.96         | H        | 56.18    | 73.98    | 17.80  | PK     |
| 15900     | 35.13   | 5.96         | H        | 41.09    | 53.98    | 12.89  | AV     |

|                     |               |
|---------------------|---------------|
| Band :              | UNII 2A       |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer Rate:      | 6.5 Mbps      |
| Operating Frequency | 5320 MHz      |
| Channel No.         | 64 Ch         |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10640     | 55.88   | 6.01         | V        | 61.89    | 73.98    | 12.09  | PK     |
| 10640     | 41.34   | 6.01         | V        | 47.35    | 53.98    | 6.63   | AV     |
| 15960     | 48.80   | 5.20         | V        | 54.00    | 73.98    | 19.98  | PK     |
| 15960     | 34.76   | 5.20         | V        | 39.96    | 53.98    | 14.02  | AV     |
| 10640     | 52.14   | 6.01         | H        | 58.15    | 73.98    | 15.83  | PK     |
| 10640     | 40.90   | 6.01         | H        | 46.91    | 53.98    | 7.07   | AV     |
| 15960     | 52.82   | 5.20         | H        | 58.02    | 73.98    | 15.96  | PK     |
| 15960     | 37.77   | 5.20         | H        | 42.97    | 53.98    | 11.01  | AV     |



|                     |               |
|---------------------|---------------|
| Band :              | UNII 2C       |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer Rate:      | 6.5 Mbps      |
| Operating Frequency | 5500 MHz      |
| Channel No.         | 100 Ch        |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11000     | 47.26   | 6.10         | V        | 53.36    | 73.98    | 20.62  | PK     |
| 11000     | 33.07   | 6.10         | V        | 39.17    | 53.98    | 14.81  | AV     |
| 16500     | 43.83   | 7.83         | V        | 51.66    | 68.20    | 16.54  | PK     |
| 11000     | 47.35   | 6.10         | H        | 53.45    | 73.98    | 20.53  | PK     |
| 11000     | 33.43   | 6.10         | H        | 39.53    | 53.98    | 14.45  | AV     |
| 16500     | 42.87   | 7.83         | H        | 50.70    | 68.20    | 17.50  | PK     |

|                     |               |
|---------------------|---------------|
| Band :              | UNII 2C       |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer Rate:      | 6.5 Mbps      |
| Operating Frequency | 5580 MHz      |
| Channel No.         | 116 Ch        |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11160     | 47.23   | 5.39         | V        | 52.62    | 73.98    | 21.36  | PK     |
| 11160     | 33.18   | 5.39         | V        | 38.57    | 53.98    | 15.41  | AV     |
| 16740     | 43.67   | 9.32         | V        | 52.99    | 68.20    | 15.21  | PK     |
| 11160     | 47.09   | 5.39         | H        | 52.48    | 73.98    | 21.50  | PK     |
| 11160     | 32.67   | 5.39         | H        | 38.06    | 53.98    | 15.92  | AV     |
| 16740     | 44.01   | 9.32         | H        | 53.33    | 68.20    | 14.87  | PK     |



|                     |               |
|---------------------|---------------|
| Band :              | UNII 2C       |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer Rate:      | 6.5 Mbps      |
| Operating Frequency | 5720 MHz      |
| Channel No.         | 144 Ch        |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11440     | 45.75   | 6.02         | V        | 51.77    | 73.98    | 22.21  | PK     |
| 11440     | 32.45   | 6.02         | V        | 38.47    | 53.98    | 15.51  | AV     |
| 17160     | 44.62   | 9.78         | V        | 54.40    | 68.20    | 13.80  | PK     |
| 11440     | 44.98   | 6.02         | H        | 51.00    | 73.98    | 22.98  | PK     |
| 11440     | 31.58   | 6.02         | H        | 37.60    | 53.98    | 16.38  | AV     |
| 17160     | 43.85   | 9.78         | H        | 53.63    | 68.20    | 14.57  | PK     |



|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2A         |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer Rate:      | 6.5 Mbps        |
| Operating Frequency | 5260 MHz        |
| Channel No.         | 52 Ch           |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10520     | 48.49   | 5.64         | V        | 54.13    | 68.20    | 14.07  | PK     |
| 15780     | 48.38   | 5.17         | V        | 53.55    | 73.98    | 20.43  | PK     |
| 15780     | 34.39   | 5.17         | V        | 39.56    | 53.98    | 14.42  | AV     |
| 10520     | 48.27   | 5.64         | H        | 53.91    | 68.20    | 14.29  | PK     |
| 15780     | 50.19   | 5.17         | H        | 55.36    | 73.98    | 18.62  | PK     |
| 15780     | 35.05   | 5.17         | H        | 40.22    | 53.98    | 13.76  | AV     |

|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2A         |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer Rate:      | 6.5 Mbps        |
| Operating Frequency | 5300 MHz        |
| Channel No.         | 60 Ch           |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10600     | 49.13   | 5.90         | V        | 55.03    | 73.98    | 18.95  | PK     |
| 10600     | 35.16   | 5.90         | V        | 41.06    | 53.98    | 12.92  | AV     |
| 15900     | 47.04   | 5.96         | V        | 53.00    | 73.98    | 20.98  | PK     |
| 15900     | 32.92   | 5.96         | V        | 38.88    | 53.98    | 15.10  | AV     |
| 10600     | 48.66   | 5.90         | H        | 54.56    | 73.98    | 19.42  | PK     |
| 10600     | 34.57   | 5.90         | H        | 40.47    | 53.98    | 13.51  | AV     |
| 15900     | 49.97   | 5.96         | H        | 55.93    | 73.98    | 18.05  | PK     |
| 15900     | 34.92   | 5.96         | H        | 40.88    | 53.98    | 13.10  | AV     |



|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2A         |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer Rate:      | 6.5 Mbps        |
| Operating Frequency | 5320 MHz        |
| Channel No.         | 64 Ch           |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 10640     | 49.21   | 6.01         | V        | 55.22    | 73.98    | 18.76  | PK     |
| 10640     | 35.46   | 6.01         | V        | 41.47    | 53.98    | 12.51  | AV     |
| 15960     | 48.58   | 5.20         | V        | 53.78    | 73.98    | 20.20  | PK     |
| 15960     | 34.45   | 5.20         | V        | 39.65    | 53.98    | 14.33  | AV     |
| 10640     | 48.39   | 6.01         | H        | 54.40    | 73.98    | 19.58  | PK     |
| 10640     | 34.69   | 6.01         | H        | 40.70    | 53.98    | 13.28  | AV     |
| 15960     | 50.70   | 5.20         | H        | 55.90    | 73.98    | 18.08  | PK     |
| 15960     | 36.14   | 5.20         | H        | 41.34    | 53.98    | 12.64  | AV     |

|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2C         |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer Rate:      | 6.5 Mbps        |
| Operating Frequency | 5500 MHz        |
| Channel No.         | 100 Ch          |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11000     | 45.99   | 6.10         | V        | 52.09    | 73.98    | 21.89  | PK     |
| 11000     | 31.28   | 6.10         | V        | 37.38    | 53.98    | 16.60  | AV     |
| 16500     | 44.40   | 7.83         | V        | 52.23    | 68.20    | 15.97  | PK     |
| 11000     | 46.13   | 6.10         | H        | 52.23    | 73.98    | 21.75  | PK     |
| 11000     | 32.09   | 6.10         | H        | 38.19    | 53.98    | 15.79  | AV     |
| 16500     | 43.90   | 7.83         | H        | 51.73    | 68.20    | 16.47  | PK     |



|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2C         |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer Rate:      | 6.5 Mbps        |
| Operating Frequency | 5580 MHz        |
| Channel No.         | 116 Ch          |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11160     | 46.10   | 5.39         | V        | 51.49    | 73.98    | 22.49  | PK     |
| 11160     | 32.33   | 5.39         | V        | 37.72    | 53.98    | 16.26  | AV     |
| 16740     | 43.75   | 9.32         | V        | 53.07    | 68.20    | 15.13  | PK     |
| 11160     | 45.98   | 5.39         | H        | 51.37    | 73.98    | 22.61  | PK     |
| 11160     | 31.58   | 5.39         | H        | 36.97    | 53.98    | 17.01  | AV     |
| 16740     | 44.19   | 9.32         | H        | 53.51    | 68.20    | 14.69  | PK     |


|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2C         |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer Rate:      | 6.5 Mbps        |
| Operating Frequency | 5720 MHz        |
| Channel No.         | 144 Ch          |

| Frequency | Reading | ANT+CL-AMP G | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|--------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]         | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 11440     | 46.24   | 6.02         | V        | 52.26    | 73.98    | 21.72  | PK     |
| 11440     | 32.83   | 6.02         | V        | 38.85    | 53.98    | 15.13  | AV     |
| 17160     | 44.21   | 9.78         | V        | 53.99    | 68.20    | 14.21  | PK     |
| 11440     | 45.85   | 6.02         | H        | 51.87    | 73.98    | 22.11  | PK     |
| 11440     | 31.28   | 6.02         | H        | 37.30    | 53.98    | 16.68  | AV     |
| 17160     | 43.47   | 9.78         | H        | 53.25    | 68.20    | 14.95  | PK     |



Test Plots

Peak Reading (802.11a, Ch.40 2nd Harmonic, H)

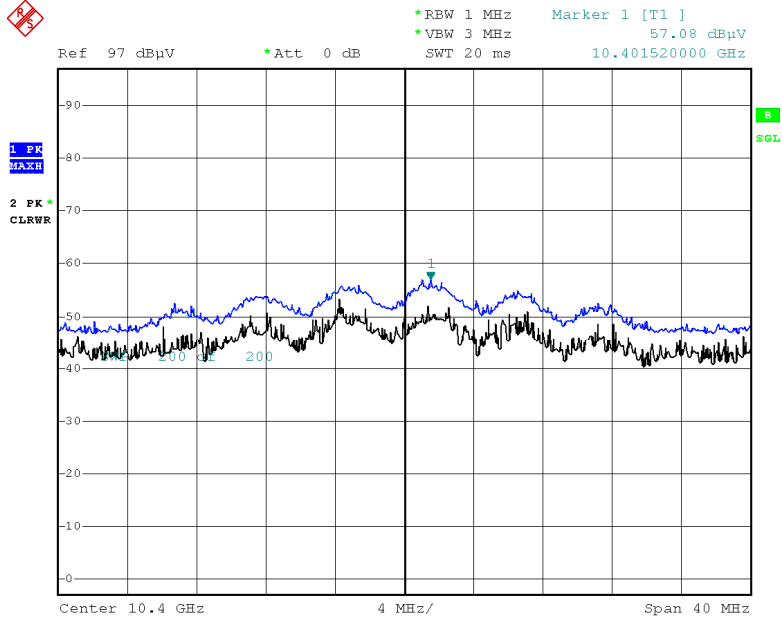

Date: 22.FEB.2021 16:53:35

**Note:**

Only the worst case plots for Radiated Spurious Emissions.



### 10.8 RADIATED RESTRICTED BAND EDGE

|                     |          |
|---------------------|----------|
| Band :              | UNII 1   |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5180 MHz |
| Channel No.         | 36 Ch    |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5150      | 45.49   | 12.69       | H        | 58.18    | 73.98    | 15.80  | PK     |
| 5150      | 33.29   | 12.69       | H        | 45.98    | 53.98    | 8.00   | AV     |
| 5150      | 44.62   | 12.69       | V        | 57.31    | 73.98    | 16.67  | PK     |
| 5150      | 32.85   | 12.69       | V        | 45.54    | 53.98    | 8.44   | AV     |

|                     |          |
|---------------------|----------|
| Band :              | UNII 2A  |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5320 MHz |
| Channel No.         | 64 Ch    |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5350      | 50.74   | 12.36       | H        | 63.10    | 73.98    | 10.88  | PK     |
| 5350      | 34.86   | 12.36       | H        | 47.22    | 53.98    | 6.76   | AV     |
| 5350      | 49.17   | 12.36       | V        | 61.53    | 73.98    | 12.45  | PK     |
| 5350      | 33.94   | 12.36       | V        | 46.30    | 53.98    | 7.68   | AV     |





|                     |          |
|---------------------|----------|
| Band :              | UNII 2C  |
| Operation Mode:     | 802.11 a |
| Transfer Rate:      | 6 Mbps   |
| Operating Frequency | 5500 MHz |
| Channel No.         | 100 Ch   |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5460      | 46.56   | 12.83       | H        | 59.39    | 73.98    | 14.59  | PK     |
| 5460      | 33.72   | 12.83       | H        | 46.55    | 53.98    | 7.43   | AV     |
| 5470      | 51.56   | 13.04       | H        | 64.60    | 68.20    | 3.60   | PK     |
| 5460      | 46.90   | 12.83       | V        | 59.73    | 73.98    | 14.25  | PK     |
| 5460      | 33.87   | 12.83       | V        | 46.70    | 53.98    | 7.28   | AV     |
| 5470      | 51.76   | 13.04       | V        | 64.80    | 68.20    | 3.40   | PK     |



|                     |               |
|---------------------|---------------|
| Band :              | UNII 1        |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer MCS Index: | 0             |
| Operating Frequency | 5180 MHz      |
| Channel No.         | 36 Ch         |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5150      | 46.63   | 12.69       | H        | 59.32    | 73.98    | 14.66  | PK     |
| 5150      | 33.20   | 12.69       | H        | 45.89    | 53.98    | 8.09   | AV     |
| 5150      | 45.73   | 12.69       | V        | 58.42    | 73.98    | 15.56  | PK     |
| 5150      | 32.10   | 12.69       | V        | 44.79    | 53.98    | 9.19   | AV     |

|                     |               |
|---------------------|---------------|
| Band :              | UNII 2A       |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer MCS Index: | 0             |
| Operating Frequency | 5320 MHz      |
| Channel No.         | 64 Ch         |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5350      | 49.68   | 12.36       | H        | 62.04    | 73.98    | 11.94  | PK     |
| 5350      | 34.65   | 12.36       | H        | 47.01    | 53.98    | 6.97   | AV     |
| 5350      | 48.69   | 12.36       | V        | 61.05    | 73.98    | 12.93  | PK     |
| 5350      | 33.29   | 12.36       | V        | 45.65    | 53.98    | 8.33   | AV     |



|                     |               |
|---------------------|---------------|
| Band :              | UNII 2C       |
| Operation Mode:     | 802.11 n_HT20 |
| Transfer MCS Index: | 0             |
| Operating Frequency | 5500 MHz      |
| Channel No.         | 100 Ch        |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5460      | 47.46   | 12.83       | H        | 60.29    | 73.98    | 13.69  | PK     |
| 5460      | 34.58   | 12.83       | H        | 47.41    | 53.98    | 6.57   | AV     |
| 5470      | 51.97   | 13.04       | H        | 65.01    | 68.20    | 3.19   | PK     |
| 5460      | 45.69   | 12.83       | V        | 58.52    | 73.98    | 15.46  | PK     |
| 5460      | 33.06   | 12.83       | V        | 45.89    | 53.98    | 8.09   | AV     |
| 5470      | 51.18   | 13.04       | V        | 64.22    | 68.20    | 3.98   | PK     |



|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 1          |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5180 MHz        |
| Channel No.         | 36 Ch           |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5150      | 47.38   | 12.69       | H        | 60.07    | 73.98    | 13.91  | PK     |
| 5150      | 33.36   | 12.69       | H        | 46.05    | 53.98    | 7.93   | AV     |
| 5150      | 46.98   | 12.69       | V        | 59.67    | 73.98    | 14.31  | PK     |
| 5150      | 32.64   | 12.69       | V        | 45.33    | 53.98    | 8.65   | AV     |

|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2A         |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5320 MHz        |
| Channel No.         | 64 Ch           |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5350      | 51.69   | 12.36       | H        | 64.05    | 73.98    | 9.93   | PK     |
| 5350      | 36.16   | 12.36       | H        | 48.52    | 53.98    | 5.46   | AV     |
| 5350      | 50.00   | 12.36       | V        | 62.36    | 73.98    | 11.62  | PK     |
| 5350      | 35.33   | 12.36       | V        | 47.69    | 53.98    | 6.29   | AV     |



|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2C         |
| Operation Mode:     | 802.11 ac_VHT20 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5500 MHz        |
| Channel No.         | 100 Ch          |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5460      | 47.38   | 12.83       | H        | 60.21    | 73.98    | 13.77  | PK     |
| 5460      | 34.37   | 12.83       | H        | 47.20    | 53.98    | 6.78   | AV     |
| 5470      | 49.38   | 13.04       | H        | 62.42    | 68.20    | 5.78   | PK     |
| 5460      | 46.16   | 12.83       | V        | 58.99    | 73.98    | 14.99  | PK     |
| 5460      | 33.20   | 12.83       | V        | 46.03    | 53.98    | 7.95   | AV     |
| 5470      | 52.03   | 13.04       | V        | 65.07    | 68.20    | 3.13   | PK     |



|                     |               |
|---------------------|---------------|
| Band :              | UNII 1        |
| Operation Mode:     | 802.11 n_HT40 |
| Transfer MCS Index: | 0             |
| Operating Frequency | 5190 MHz      |
| Channel No.         | 38 Ch         |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5150      | 52.60   | 12.69       | H        | 65.29    | 73.98    | 8.69   | PK     |
| 5150      | 38.20   | 12.69       | H        | 50.89    | 53.98    | 3.09   | AV     |
| 5150      | 51.84   | 12.69       | V        | 64.53    | 73.98    | 9.45   | PK     |
| 5150      | 37.28   | 12.69       | V        | 49.97    | 53.98    | 4.01   | AV     |

|                     |               |
|---------------------|---------------|
| Band :              | UNII 1        |
| Operation Mode:     | 802.11 n_HT40 |
| Transfer MCS Index: | 0             |
| Operating Frequency | 5310 MHz      |
| Channel No.         | 62 Ch         |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5350      | 50.79   | 12.36       | H        | 63.15    | 73.98    | 10.83  | PK     |
| 5350      | 35.39   | 12.36       | H        | 47.75    | 53.98    | 6.23   | AV     |
| 5350      | 49.93   | 12.36       | V        | 62.29    | 73.98    | 11.69  | PK     |
| 5350      | 34.60   | 12.36       | V        | 46.96    | 53.98    | 7.02   | AV     |



|                     |               |
|---------------------|---------------|
| Band :              | UNII 2C       |
| Operation Mode:     | 802.11 n_HT40 |
| Transfer MCS Index: | 0             |
| Operating Frequency | 5510 MHz      |
| Channel No.         | 102 Ch        |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5460      | 47.59   | 12.83       | H        | 60.42    | 73.98    | 13.56  | PK     |
| 5460      | 34.32   | 12.83       | H        | 47.15    | 53.98    | 6.83   | AV     |
| 5470      | 51.70   | 13.04       | H        | 64.74    | 68.20    | 3.46   | PK     |
| 5460      | 46.38   | 12.83       | V        | 59.21    | 73.98    | 14.77  | PK     |
| 5460      | 33.28   | 12.83       | V        | 46.11    | 53.98    | 7.87   | AV     |
| 5470      | 50.22   | 13.04       | V        | 63.26    | 68.20    | 4.94   | PK     |



|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 1          |
| Operation Mode:     | 802.11 ac_VHT40 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5190 MHz        |
| Channel No.         | 38 Ch           |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5150      | 56.56   | 12.69       | H        | 69.25    | 73.98    | 4.73   | PK     |
| 5150      | 38.06   | 12.69       | H        | 50.75    | 53.98    | 3.23   | AV     |
| 5150      | 55.82   | 12.69       | V        | 68.51    | 73.98    | 5.47   | PK     |
| 5150      | 37.64   | 12.69       | V        | 50.33    | 53.98    | 3.65   | AV     |

|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 1          |
| Operation Mode:     | 802.11 ac_VHT40 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5310 MHz        |
| Channel No.         | 62 Ch           |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5350      | 48.73   | 12.36       | H        | 61.09    | 73.98    | 12.89  | PK     |
| 5350      | 34.80   | 12.36       | H        | 47.16    | 53.98    | 6.82   | AV     |
| 5350      | 47.75   | 12.36       | V        | 60.11    | 73.98    | 13.87  | PK     |
| 5350      | 33.09   | 12.36       | V        | 45.45    | 53.98    | 8.53   | AV     |





|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2C         |
| Operation Mode:     | 802.11 ac_VHT40 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5510 MHz        |
| Channel No.         | 102 Ch          |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5460      | 45.94   | 12.83       | H        | 58.77    | 73.98    | 15.21  | PK     |
| 5460      | 33.41   | 12.83       | H        | 46.24    | 53.98    | 7.74   | AV     |
| 5470      | 50.49   | 13.04       | H        | 63.53    | 68.20    | 4.67   | PK     |
| 5460      | 45.28   | 12.83       | V        | 58.11    | 73.98    | 15.87  | PK     |
| 5460      | 32.69   | 12.83       | V        | 45.52    | 53.98    | 8.46   | AV     |
| 5470      | 49.39   | 13.04       | V        | 62.43    | 68.20    | 5.77   | PK     |



|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 1          |
| Operation Mode:     | 802.11 ac_VHT80 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5210 MHz        |
| Channel No.         | 42 Ch           |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5150      | 51.65   | 12.69       | H        | 64.34    | 73.98    | 9.64   | PK     |
| 5150      | 37.54   | 12.69       | H        | 50.23    | 53.98    | 3.75   | AV     |
| 5150      | 47.69   | 12.69       | V        | 60.38    | 73.98    | 13.60  | PK     |
| 5150      | 33.58   | 12.69       | V        | 46.27    | 53.98    | 7.71   | AV     |

|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2A         |
| Operation Mode:     | 802.11 ac_VHT80 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5290 MHz        |
| Channel No.         | 58 Ch           |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5350      | 49.41   | 12.36       | H        | 61.77    | 73.98    | 12.21  | PK     |
| 5350      | 35.31   | 12.36       | H        | 47.67    | 53.98    | 6.31   | AV     |
| 5350      | 45.27   | 12.36       | V        | 57.63    | 73.98    | 16.35  | PK     |
| 5350      | 32.14   | 12.36       | V        | 44.50    | 53.98    | 9.48   | AV     |




|                     |                 |
|---------------------|-----------------|
| Band :              | UNII 2C         |
| Operation Mode:     | 802.11 ac_VHT80 |
| Transfer MCS Index: | 0               |
| Operating Frequency | 5530 MHz        |
| Channel No.         | 106 Ch          |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total    | Limit    | Margin | Detect |
|-----------|---------|-------------|----------|----------|----------|--------|--------|
| [MHz]     | dBuV    | [dB]        | [H/V]    | [dBuV/m] | [dBuV/m] | [dB]   |        |
| 5460      | 48.51   | 12.83       | H        | 61.34    | 73.98    | 12.64  | PK     |
| 5460      | 36.46   | 12.83       | H        | 49.29    | 53.98    | 4.69   | AV     |
| 5470      | 49.33   | 13.04       | H        | 62.37    | 68.20    | 5.83   | PK     |
| 5460      | 45.78   | 12.83       | V        | 58.61    | 73.98    | 15.37  | PK     |
| 5460      | 32.48   | 12.83       | V        | 45.31    | 53.98    | 8.67   | AV     |
| 5470      | 48.64   | 13.04       | V        | 61.68    | 68.20    | 6.52   | PK     |




Test Plots(UNII 1, 2A, 2C)

Average Reading (802.11n(HT40), Ch.38, X-H)

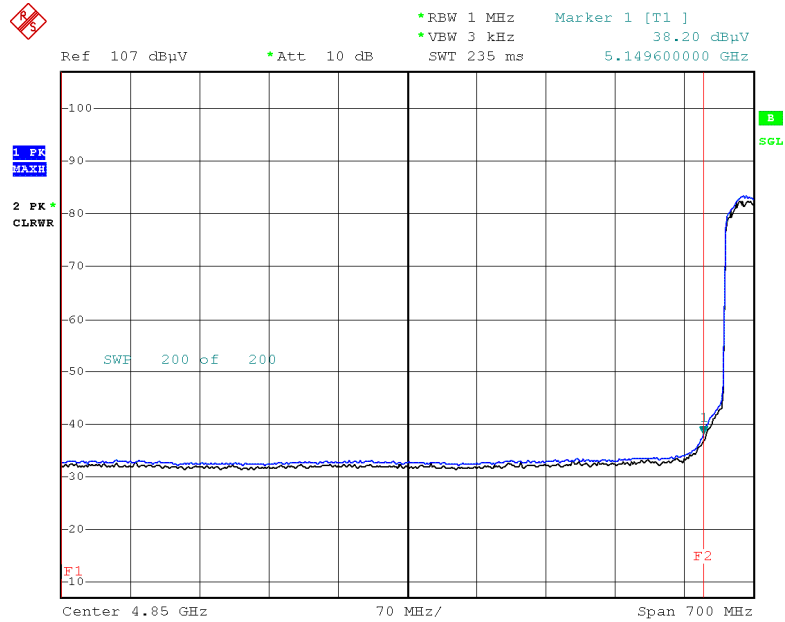

Date: 18.FEB.2021 16:19:02

Peak Reading (802.11n(HT40), Ch.38, X-H)

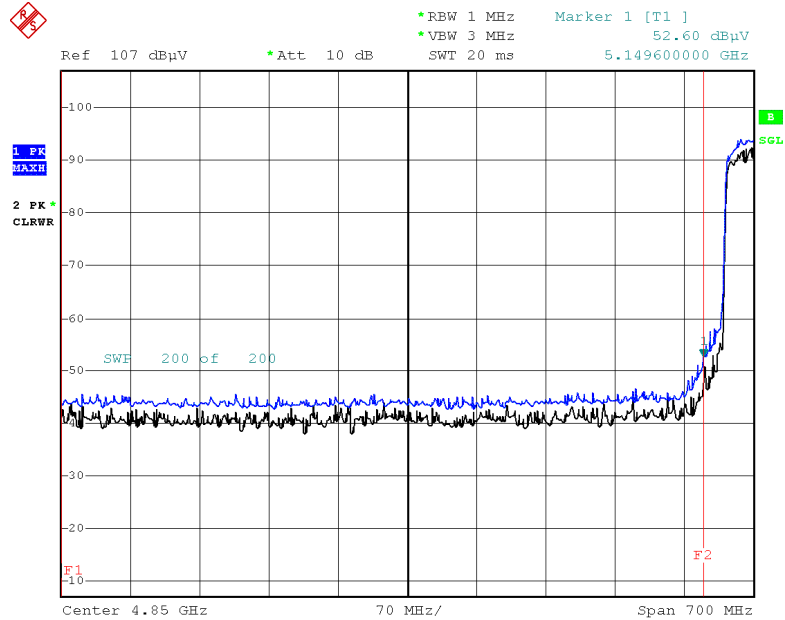

Date: 18.FEB.2021 16:19:30


**Note:**

Only the worst case plots for Radiated Restricted Band Edge.




▣ Test Plots(UNII 3)

Peak Reading (802.11a, Ch.165)

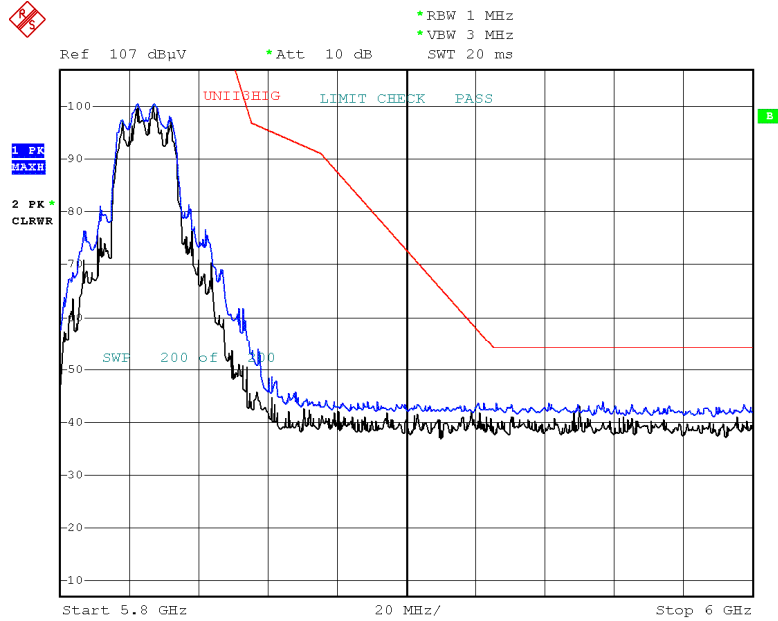

Date: 18.FEB.2021 21:36:31


Peak Reading (802.11n\_HT20, Ch.165)

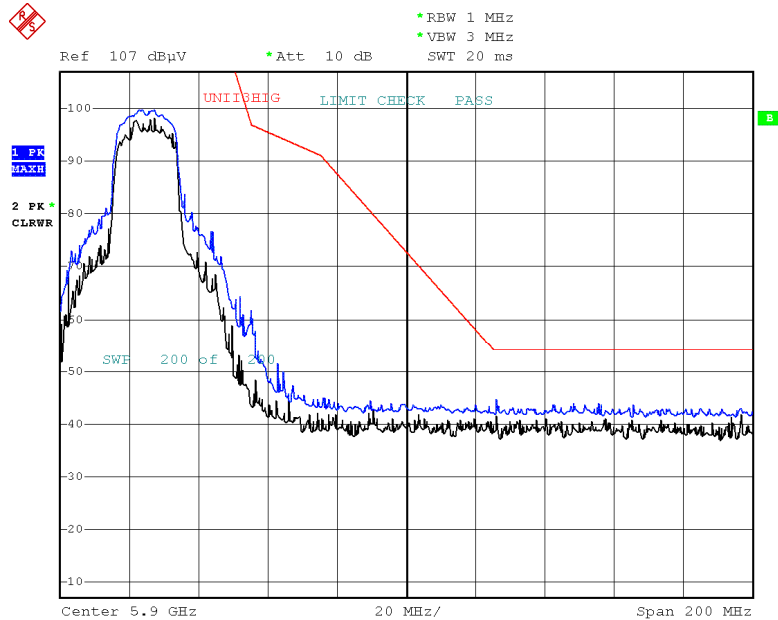

Date: 18.FEB.2021 21:37:50




### Peak Reading (802.11ac\_VHT20, Ch.165)

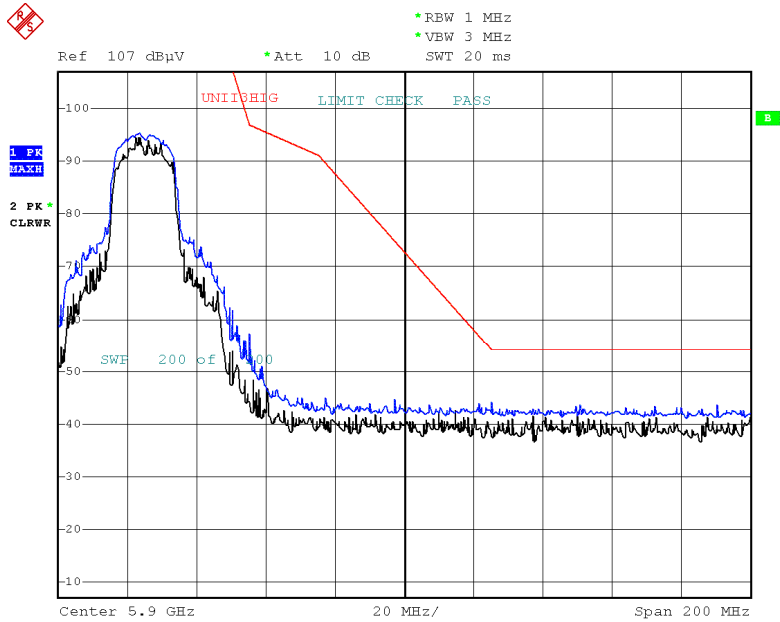

Date: 18.FEB.2021 21:38:37


### Peak Reading (802.11n\_HT40, Ch.159)

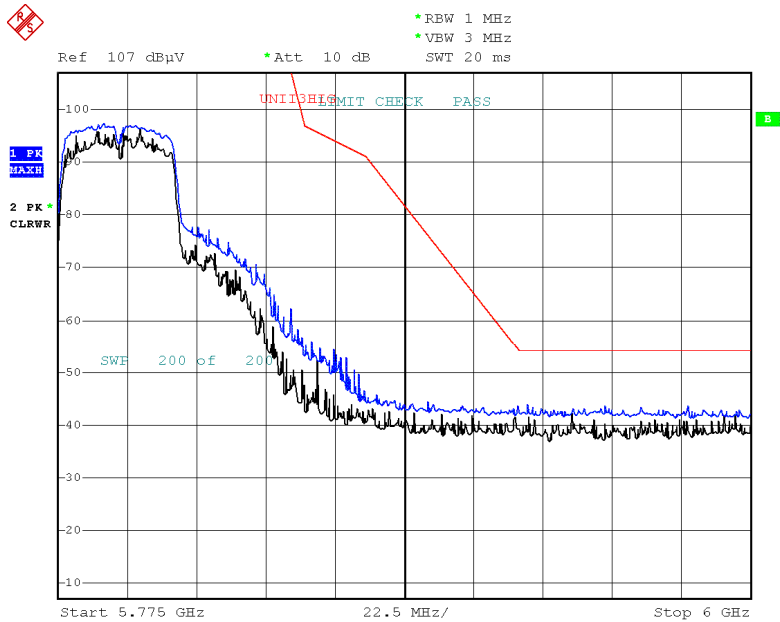

Date: 18.FEB.2021 21:40:52




### Peak Reading (802.11ac\_VHT40, Ch.159)

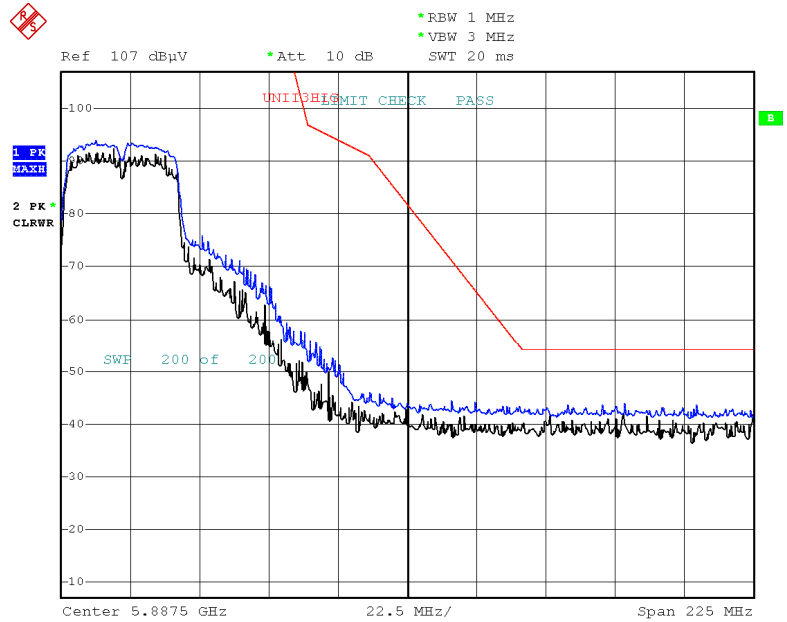

Date: 18.FEB.2021 21:41:36

### Peak Reading (802.11ac\_VHT80, Ch.155)

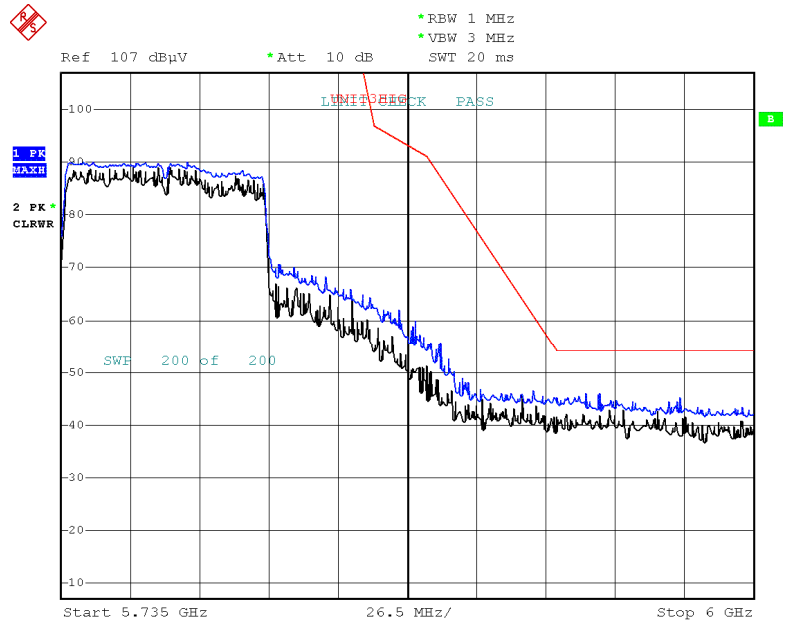

Date: 18.FEB.2021 21:42:41



### 10.9 RECEIVER SPURIOUS EMISSIONS

#### Frequency Range : Below 1 GHz

| Frequency | Reading | Ant. factor | Cable loss | Ant. POL | Total  | Limit  | Margin |
|-----------|---------|-------------|------------|----------|--------|--------|--------|
| MHz       | dBuV/m  | dBm/m       | dBm        | (H/V)    | dBuV/m | dBuV/m | dB     |

No Critical peaks found

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

#### Frequency Range : Above 1 GHz

| Frequency | Reading | Ant. factor | Cable loss | Ant. POL | Total  | Limit  | Margin |
|-----------|---------|-------------|------------|----------|--------|--------|--------|
| MHz       | dBuV/m  | dBm/m       | dBm        | (H/V)    | dBuV/m | dBuV/m | dB     |

No Critical peaks found





## 10.10 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

5G\_N


1 / 2

## Test Report

### Common Information

|                        |             |
|------------------------|-------------|
| EUT :                  | MTVWBE01GLX |
| Manufacturer :         | LG          |
| Test Site :            | SHIELD ROOM |
| Operating Conditions : | 5G WLAN N   |
| Operator Name :        |             |
| Comment :              |             |

Full Spectrum

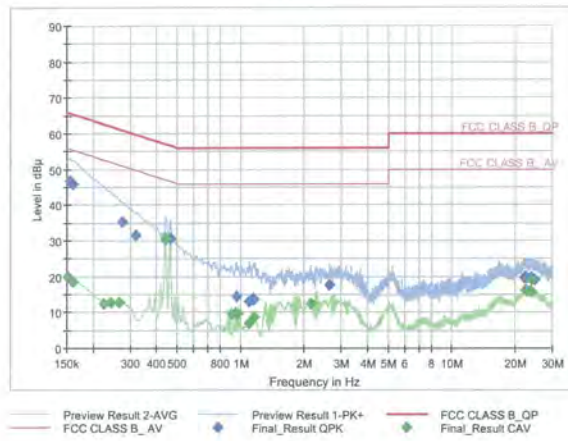

### Final Result QPK

| Frequency (MHz) | QuasiPeak | Limit (dBuV) | Margin | Bandwidth | Line | Filter | Corr. (dB) |
|-----------------|-----------|--------------|--------|-----------|------|--------|------------|
| 0.154500        | 46.67     | 65.75        | 19.08  | 9.000     | N    | OFF    | 9.6        |
| 0.161250        | 45.83     | 65.40        | 19.57  | 9.000     | N    | OFF    | 9.6        |
| 0.276000        | 35.09     | 60.94        | 25.84  | 9.000     | N    | OFF    | 9.6        |
| 0.318750        | 31.43     | 59.74        | 28.31  | 9.000     | N    | OFF    | 9.6        |
| 0.442500        | 30.16     | 57.02        | 26.86  | 9.000     | N    | OFF    | 9.6        |
| 0.465000        | 30.66     | 56.60        | 25.95  | 9.000     | N    | OFF    | 9.6        |
| 0.954500        | 14.57     | 56.00        | 41.43  | 9.000     | N    | OFF    | 9.6        |
| 1.103000        | 13.12     | 56.00        | 42.88  | 9.000     | N    | OFF    | 9.6        |
| 1.145750        | 13.61     | 56.00        | 42.39  | 9.000     | N    | OFF    | 9.6        |
| 1.150250        | 13.85     | 56.00        | 42.15  | 9.000     | N    | OFF    | 9.6        |
| 1.166250        | 13.43     | 56.00        | 42.57  | 9.000     | N    | OFF    | 9.6        |
| 2.637500        | 17.57     | 56.00        | 38.43  | 9.000     | N    | OFF    | 9.6        |
| 22.226000       | 19.58     | 60.00        | 40.42  | 9.000     | N    | OFF    | 9.9        |
| 22.412750       | 20.01     | 60.00        | 39.99  | 9.000     | N    | OFF    | 10.0       |
| 22.574750       | 19.50     | 60.00        | 40.50  | 9.000     | N    | OFF    | 10.0       |
| 23.569250       | 19.67     | 60.00        | 40.33  | 9.000     | N    | OFF    | 10.0       |
| 23.852750       | 19.50     | 60.00        | 40.50  | 9.000     | N    | OFF    | 10.0       |
| 24.647000       | 19.02     | 60.00        | 40.98  | 9.000     | N    | OFF    | 10.0       |

### Final Result CAV

2021-01-07

오후 8:34:46



5G\_N

2 / 2

| Frequency (MHz) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|-----------------|--------------|-------------|-----------------|------|--------|------------|
| 0.152250        | 19.93           | 55.88        | 35.94       | 9.000           | N    | OFF    | 9.6        |
| 0.161250        | 18.41           | 55.40        | 36.99       | 9.000           | N    | OFF    | 9.6        |
| 0.224250        | 12.36           | 52.66        | 40.30       | 9.000           | N    | OFF    | 9.6        |
| 0.244500        | 12.67           | 51.94        | 39.28       | 9.000           | N    | OFF    | 9.6        |
| 0.267000        | 12.74           | 51.21        | 38.47       | 9.000           | N    | OFF    | 9.6        |
| 0.440250        | 30.61           | 47.06        | 16.44       | 9.000           | N    | OFF    | 9.6        |
| 0.905000        | 9.49            | 46.00        | 36.51       | 9.000           | N    | OFF    | 9.6        |
| 0.952250        | 9.92            | 46.00        | 36.08       | 9.000           | N    | OFF    | 9.6        |
| 0.974750        | 9.57            | 46.00        | 36.43       | 9.000           | N    | OFF    | 9.6        |
| 1.103000        | 6.82            | 46.00        | 39.18       | 9.000           | N    | OFF    | 9.6        |
| 1.166000        | 8.66            | 46.00        | 37.34       | 9.000           | N    | OFF    | 9.6        |
| 2.165000        | 12.52           | 46.00        | 33.48       | 9.000           | N    | OFF    | 9.6        |
| 22.403750       | 16.18           | 50.00        | 33.82       | 9.000           | N    | OFF    | 10.0       |
| 22.777250       | 15.77           | 50.00        | 34.23       | 9.000           | N    | OFF    | 10.0       |
| 23.569250       | 15.82           | 50.00        | 34.18       | 9.000           | N    | OFF    | 10.0       |
| 23.648000       | 15.79           | 50.00        | 34.21       | 9.000           | N    | OFF    | 10.0       |
| 23.945000       | 15.66           | 50.00        | 34.34       | 9.000           | N    | OFF    | 10.0       |
| 24.055250       | 18.95           | 50.00        | 31.05       | 9.000           | N    | OFF    | 10.0       |

2021-01-07

오후 8:34:46



Conducted Emissions (Line 2)

5G\_L1


1 / 2

Test Report

Common Information

EUT : MTVWBE01GLX  
 Manufacturer : LG  
 Test Site: SHIELD ROOM  
 Operating Conditions : 5G WLAN L1  
 Operator Name:  
 Comment:

Full Spectrum

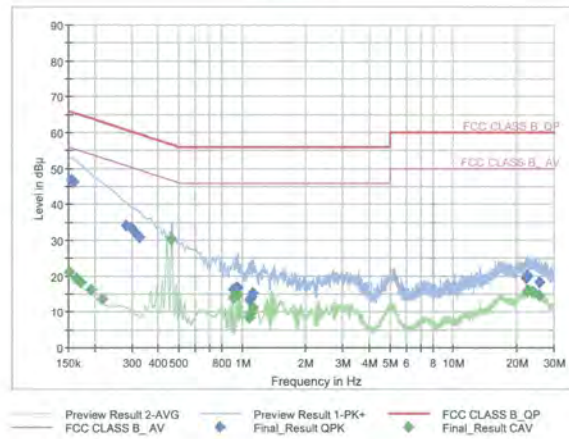

Final Result QPK

| Frequency (MHz) | QuasiPeak | Limit (dBuV) | Margin | Bandwidth | Line | Filter | Corr. (dB) |
|-----------------|-----------|--------------|--------|-----------|------|--------|------------|
| 0.154500        | 46.77     | 65.75        | 18.98  | 9.000     | L1   | OFF    | 9.6        |
| 0.159000        | 46.22     | 65.52        | 19.29  | 9.000     | L1   | OFF    | 9.6        |
| 0.280500        | 33.98     | 60.80        | 26.82  | 9.000     | L1   | OFF    | 9.6        |
| 0.298500        | 33.60     | 60.28        | 26.68  | 9.000     | L1   | OFF    | 9.6        |
| 0.314250        | 31.62     | 59.86        | 28.23  | 9.000     | L1   | OFF    | 9.6        |
| 0.327750        | 30.74     | 59.51        | 28.76  | 9.000     | L1   | OFF    | 9.6        |
| 0.907250        | 16.08     | 56.00        | 39.92  | 9.000     | L1   | OFF    | 9.6        |
| 0.929750        | 16.52     | 56.00        | 39.48  | 9.000     | L1   | OFF    | 9.6        |
| 0.952250        | 16.69     | 56.00        | 39.31  | 9.000     | L1   | OFF    | 9.6        |
| 1.080500        | 13.37     | 56.00        | 42.63  | 9.000     | L1   | OFF    | 9.6        |
| 1.105250        | 14.27     | 56.00        | 41.73  | 9.000     | L1   | OFF    | 9.6        |
| 1.127750        | 15.36     | 56.00        | 40.64  | 9.000     | L1   | OFF    | 9.6        |
| 22.244000       | 19.45     | 60.00        | 40.55  | 9.000     | L1   | OFF    | 10.0       |
| 22.390250       | 20.09     | 60.00        | 39.91  | 9.000     | L1   | OFF    | 10.0       |
| 22.401500       | 20.04     | 60.00        | 39.96  | 9.000     | L1   | OFF    | 10.0       |
| 22.415000       | 19.87     | 60.00        | 40.13  | 9.000     | L1   | OFF    | 10.0       |
| 22.451000       | 19.84     | 60.00        | 40.16  | 9.000     | L1   | OFF    | 10.0       |
| 25.673000       | 18.24     | 60.00        | 41.76  | 9.000     | L1   | OFF    | 10.0       |

Final Result CAV

2021-01-07

오후 8:40:18



5G\_L1

2 / 2

| Frequency (MHz) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|-----------------|--------------|-------------|-----------------|------|--------|------------|
| 0.152250        | 20.94           | 55.88        | 34.94       | 9.000           | L1   | OFF    | 9.6        |
| 0.163500        | 19.34           | 55.28        | 35.94       | 9.000           | L1   | OFF    | 9.6        |
| 0.172500        | 18.21           | 54.84        | 36.63       | 9.000           | L1   | OFF    | 9.6        |
| 0.192750        | 16.05           | 53.92        | 37.87       | 9.000           | L1   | OFF    | 9.6        |
| 0.217500        | 13.51           | 52.91        | 39.41       | 9.000           | L1   | OFF    | 9.6        |
| 0.462750        | 30.18           | 46.64        | 16.46       | 9.000           | L1   | OFF    | 9.6        |
| 0.905000        | 13.98           | 46.00        | 32.02       | 9.000           | L1   | OFF    | 9.6        |
| 0.927500        | 14.29           | 46.00        | 31.71       | 9.000           | L1   | OFF    | 9.6        |
| 0.950000        | 14.80           | 46.00        | 31.20       | 9.000           | L1   | OFF    | 9.6        |
| 1.080500        | 8.32            | 46.00        | 37.68       | 9.000           | L1   | OFF    | 9.6        |
| 1.100750        | 9.50            | 46.00        | 36.50       | 9.000           | L1   | OFF    | 9.6        |
| 1.125500        | 11.26           | 46.00        | 34.74       | 9.000           | L1   | OFF    | 9.6        |
| 22.275500       | 15.70           | 50.00        | 34.30       | 9.000           | L1   | OFF    | 10.0       |
| 22.417250       | 15.84           | 50.00        | 34.16       | 9.000           | L1   | OFF    | 10.0       |
| 22.727750       | 15.78           | 50.00        | 34.22       | 9.000           | L1   | OFF    | 10.0       |
| 23.634500       | 15.53           | 50.00        | 34.47       | 9.000           | L1   | OFF    | 10.0       |
| 24.347750       | 15.20           | 50.00        | 34.80       | 9.000           | L1   | OFF    | 10.0       |
| 25.670750       | 14.41           | 50.00        | 35.59       | 9.000           | L1   | OFF    | 10.0       |

2021-01-07

오후 8:40:18

## 11. LIST OF TEST EQUIPMENT

### Conducted Test

| Manufacturer    | Model / Equipment                            | Calibration Date | Calibration Interval | Serial No. |
|-----------------|--|------------------|----------------------|------------|
| Rohde & Schwarz | ENV216 / LISN                                | 09/04/2020       | Annual               | 102245     |
| Rohde & Schwarz | ESCI / Test Receiver                         | 06/10/2020       | Annual               | 100584     |
| ESPAC           | SU-642 / Temperature Chamber                 | 03/18/2020       | Annual               | 0093008124 |
| Agilent         | N9030A / Signal Analyzer                     | 01/11/2021       | Annual               | MY49431210 |
| Rohde & Schwarz | OSP 120 / Power Measurement Set              | 07/02/2020       | Annual               | 101231     |
| Agilent         | N1911A / Power Meter                         | 04/07/2020       | Annual               | MY45100523 |
| Keysight        | N1921A / Power Sensor                        | 06/08/2020       | Annual               | MY57820067 |
| Agilent         | 87300B / Directional Coupler                 | 11/10/2020       | Annual               | 3116A03621 |
| Hewlett Packard | 11667B / Power Splitter                      | 05/25/2020       | Annual               | 05001      |
| Hewlett Packard | E3632A / DC Power Supply                     | 06/12/2020       | Annual               | KR75303960 |
| Agilent         | 8493C / Attenuator(10 dB)                    | 06/26/2020       | Annual               | 07560      |
| Rohde & Schwarz | EMC32 / Software                             | N/A              | N/A                  | N/A        |
| HCT CO., LTD.   | FCC WLAN&BT&BLE Conducted Test Software v3.0 | N/A              | N/A                  | N/A        |
| Rohde & Schwarz | CBT / Bluetooth Tester                       | 05/12/2020       | Annual               | 100422     |
| Agilent         | 11636A / Power Divider                       | 07/24/2020       | Annual               | 9109       |
| Agilent         | N5182A / Vector Signal Generator             | 08/26/2020       | Annual               | MY50140312 |

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.



**Radiated Test**

| Manufacturer           | Model / Equipment  | Calibration Date | Calibration Interval | Serial No.  |
|------------------------|--|------------------|----------------------|-------------|
| Innco system           | CO3000 / Controller(Antenna mast)                                      | N/A              | N/A                  | CO3000-4p   |
| Innco system           | MA4640/800-XP-EP / Antenna Position Tower                              | N/A              | N/A                  | N/A         |
| Emco                   | 2090 / Controller  | N/A              | N/A                  | 060520      |
| Ets                    | Turn Table   | N/A              | N/A                  | N/A         |
| Rohde & Schwarz        | Loop Antenna   | 05/18/2020       | Biennial             | 1513-175    |
| Schwarzbeck            | VULB 9160 / Hybrid Antenna   | 08/19/2020       | Biennial             | 9160-3368   |
| Schwarzbeck            | VULB 9168 / Hybrid Antenna   | 09/04/2020       | Biennial             | 9168-0895   |
| Schwarzbeck            | BBHA 9120D / Horn Antenna  | 11/18/2019       | Biennial             | 9120D-1191  |
| Schwarzbeck            | BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)                               | 11/29/2019       | Biennial             | BBHA9170541 |
| Rohde & Schwarz        | FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer                                | 09/14/2020       | Annual               | 836650/016  |
| Rohde & Schwarz        | FSV40-N / Spectrum Analyzer  | 09/22/2020       | Annual               | 101068-SZ   |
| Wainwright Instruments | WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter                | 01/06/2021       | Annual               | 2           |
| Wainwright Instruments | WRCJV5100/5850-40/50-8EEK / Band Reject Filter                         | 02/08/2021       | Annual               | 1           |
| CERNEX                 | CBLU1183540B-01/Broadband Bench Top LNA 56-10 / Attenuator(10 dB)      | 12/23/2020       | Annual               | N/A         |
| WEINSCHTEL             | CBL06185030 / Broadband Low Noise Amplifier 18B-03 / Attenuator (3 dB) | 12/23/2020       | Annual               | N/A         |
| Api tech.              | WHKX10-2700-3000-18000-40SS / High Pass Filter                         | 12/23/2020       | Annual               | N/A         |
| Wainwright Instruments | WHKX8-6090-7000-18000-40SS / High Pass Filter                          | 12/23/2020       | Annual               | N/A         |
| T&M SYSTEM             | COAXIAL ATTENUATOR / Thru  | 12/23/2020       | Annual               | N/A         |
| CERNEX                 | CBL18265035 / Power Amplifier  | 12/04/2020       | Annual               | 22966       |
| CERNEX                 | CBL26405040 / Power Amplifier  | 03/23/2020       | Annual               | 25956       |

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).



## 12. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2103-FI008-P |