

**Test SKU: SKU #1 with AWAN Antenna**

Page 1 of 1

Date: 9/25/2020

Test Laboratory: Audix\_SAR Lab

**P13 802.11b CH7 2442MHz ant2****DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.873$  S/m;  $\epsilon_r = 38.749$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (4x10x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.164 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.778 V/m; Power Drift = 0.21 dB


Peak SAR (extrapolated) = 0.327 W/kg

**SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.071 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 0.213 W/kg

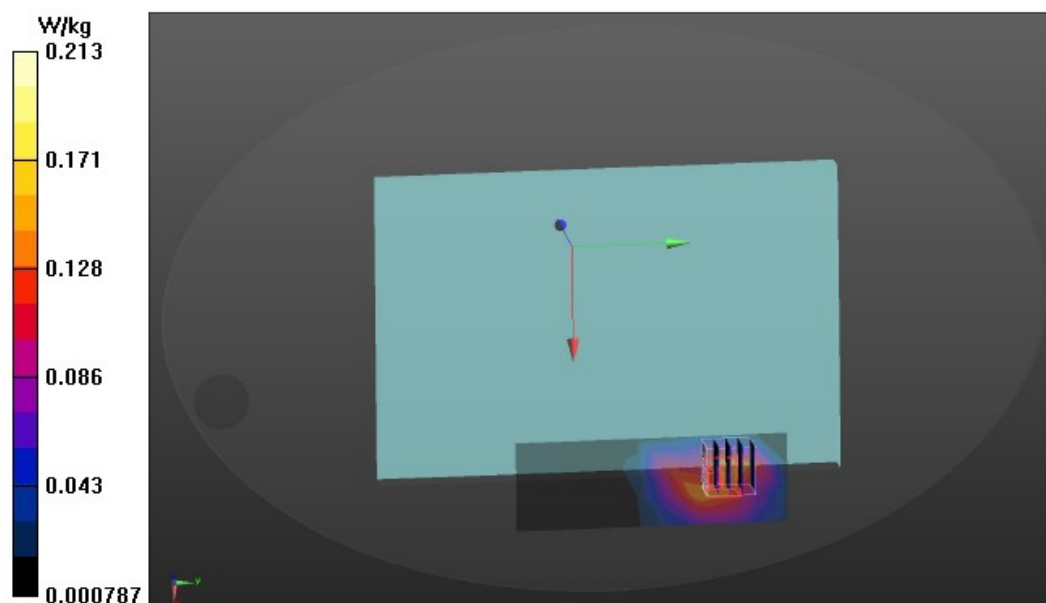

Date: 9/25/2020

Test Laboratory: Audix\_SAR Lab

**P12 802.11b CH7 2442MHz ant1****DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.864$  S/m;  $\epsilon_r = 38.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(7.69, 7.69, 7.69) @ 2437 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (4x10x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.261 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.889 V/m; Power Drift = 0.29 dB


Peak SAR (extrapolated) = 0.492 W/kg

**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.101 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 0.347 W/kg

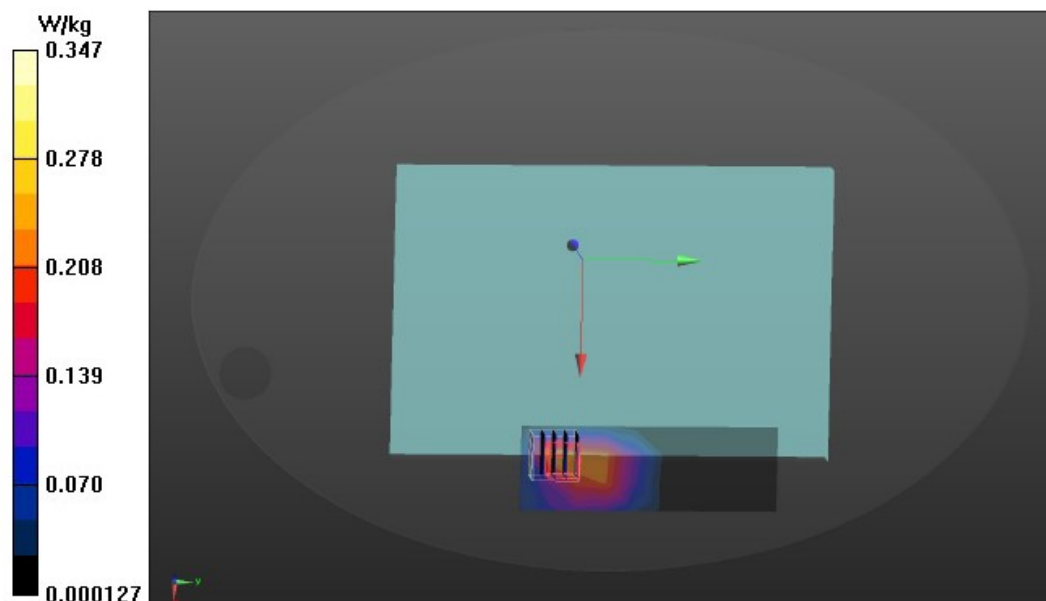

Date: 9/25/2020

Test Laboratory: Audix\_SAR Lab

**P14 GFSK CH39 2441MHz****DUT: 13U70P(AWAN)**


Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.872$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(7.69, 7.69, 7.69) @ 2441 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (4x10x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm  
Maximum value of SAR (measured) = 0.0201 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 0.338 V/m; Power Drift = 0.42 dB  
Peak SAR (extrapolated) = 0.0360 W/kg  
**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00784 W/kg**  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 50.9%  
Maximum value of SAR (measured) = 0.0233 W/kg

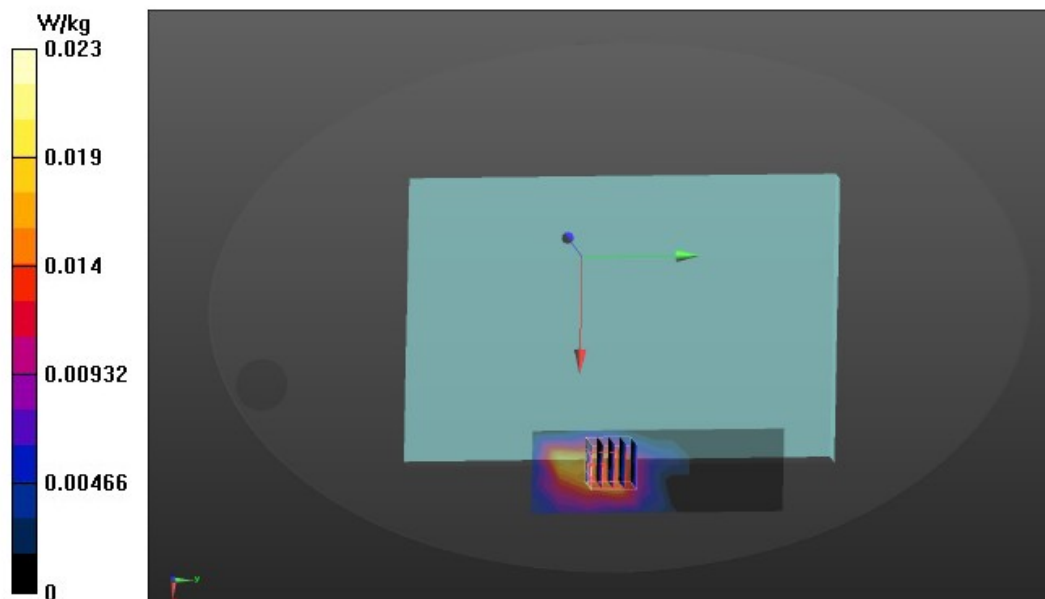

Date: 9/23/2020

Test Laboratory: Audix\_SAR Lab

**P2 802.11a CH48 5240MHz ant2**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.892$  S/m;  $\epsilon_r = 36.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(5.25, 5.25, 5.25) @ 5240 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.918 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.235 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 2.29 W/kg

**SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.201 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 1.17 W/kg

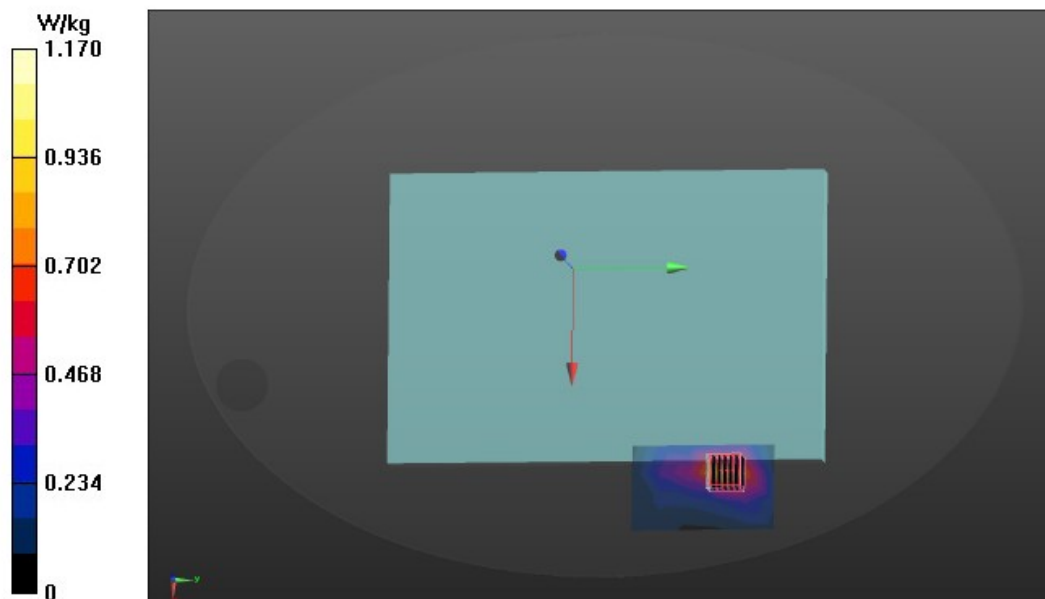

Date: 9/23/2020

Test Laboratory: Audix\_SAR Lab

**P1 802.11a CH48 5240MHz ant1**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.892$  S/m;  $\epsilon_r = 36.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(5.25, 5.25, 5.25) @ 5240 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.757 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 0.9450 V/m; Power Drift = 1.02 dB


Peak SAR (extrapolated) = 1.78 W/kg

**SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.191 W/kg**

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 0.859 W/kg

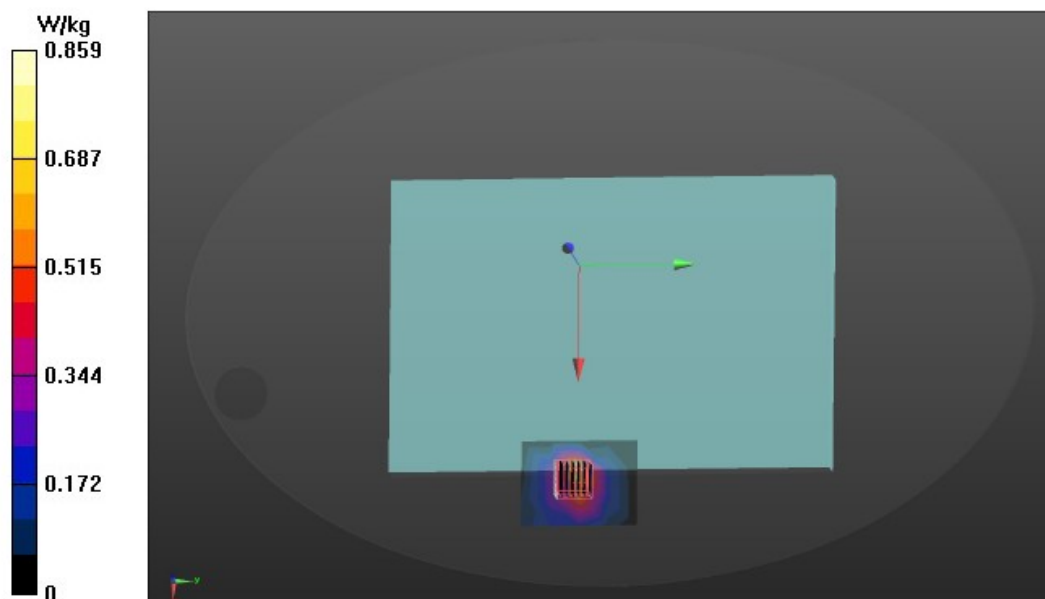

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P11 802.11a CH100 5500MHz ant2****DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.18$  S/m;  $\epsilon_r = 35.572$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5500 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.852 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.184 V/m; Power Drift = 0.33 dB


Peak SAR (extrapolated) = 2.94 W/kg

**SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.213 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 1.37 W/kg

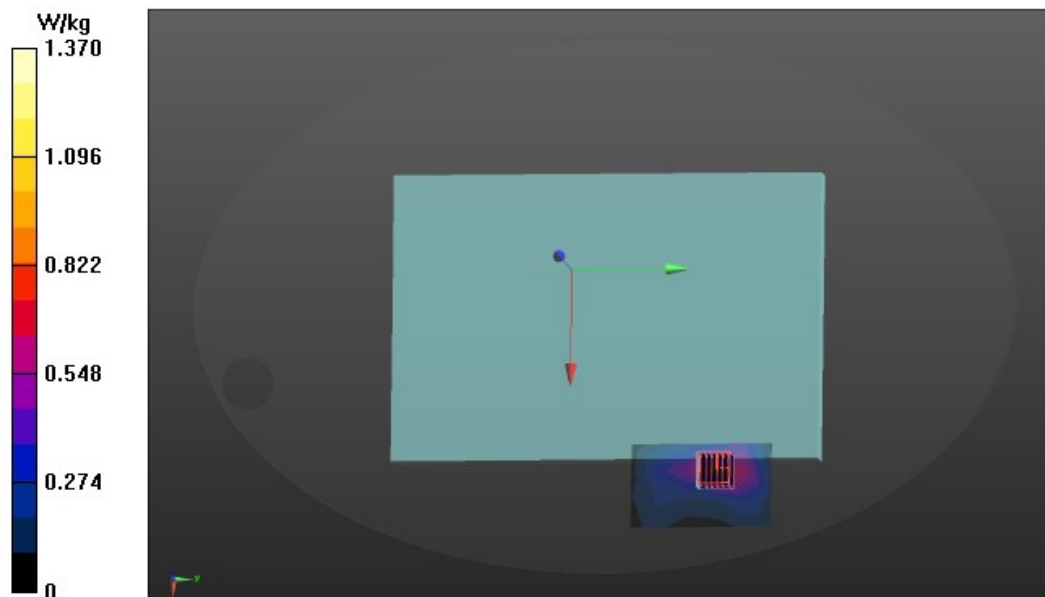

Date: 9/23/2020

Test Laboratory: Audix\_SAR Lab

**P4 802.11a CH116 5580MHz ant2**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.268$  S/m;  $\epsilon_r = 35.435$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5580 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.36 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 0 V/m; Power Drift = 1.50 dB


Peak SAR (extrapolated) = 4.51 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.313 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 2.19 W/kg

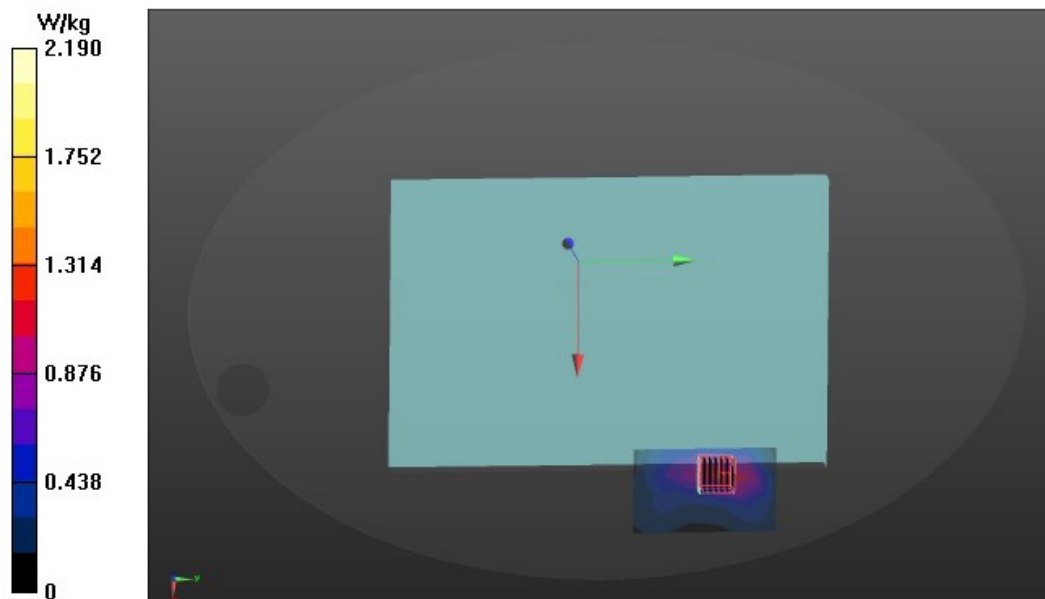

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P10 802.11a CH100 5500MHz ant1****DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.18$  S/m;  $\epsilon_r = 35.572$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5500 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.508 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.005 V/m; Power Drift = 0.90 dB


Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.155 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 0.784 W/kg

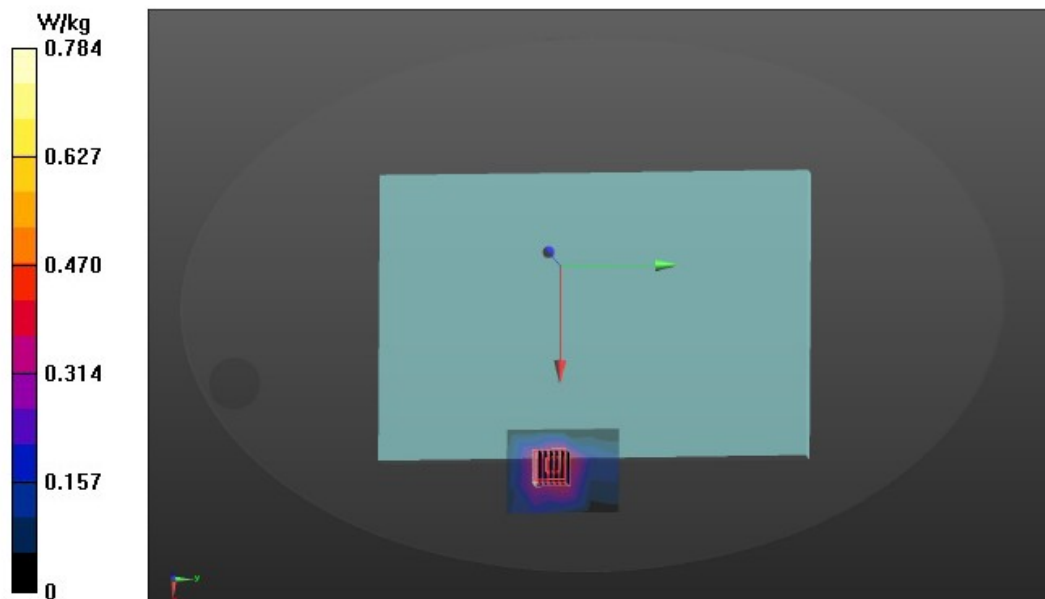



Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P3 802.11a CH116 5580MHz ant1**

**DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.268$  S/m;  $\epsilon_r = 35.435$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5580 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.913 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.285 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 3.05 W/kg

**SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.284 W/kg**

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 1.50 W/kg

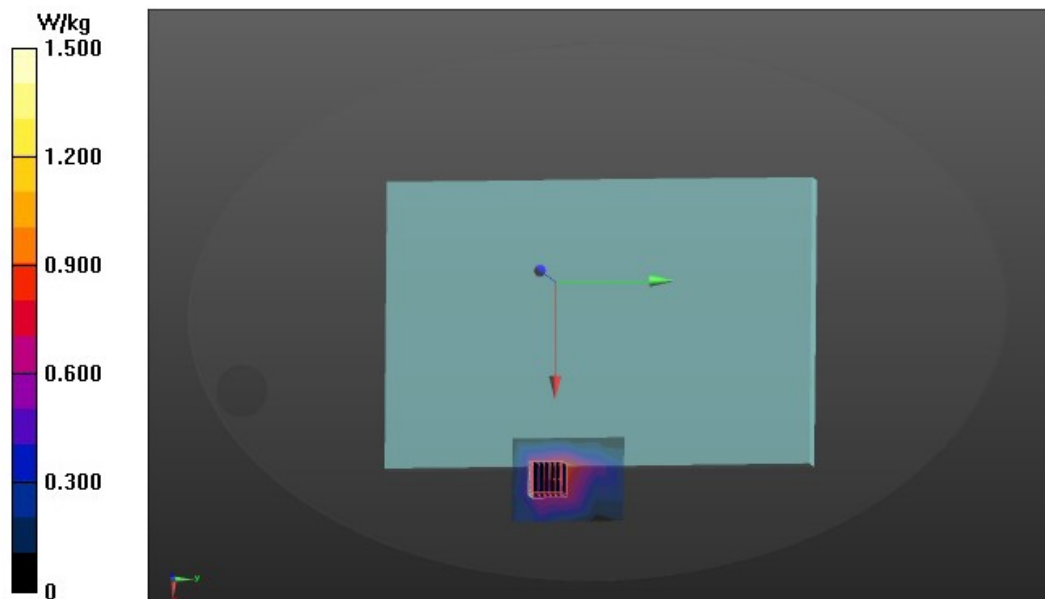

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P6 802.11a CH149 5745MHz ant2**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.452$  S/m;  $\epsilon_r = 35.172$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5745 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.57 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.558 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 5.16 W/kg

**SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.399 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 40.8%

Maximum value of SAR (measured) = 2.30 W/kg

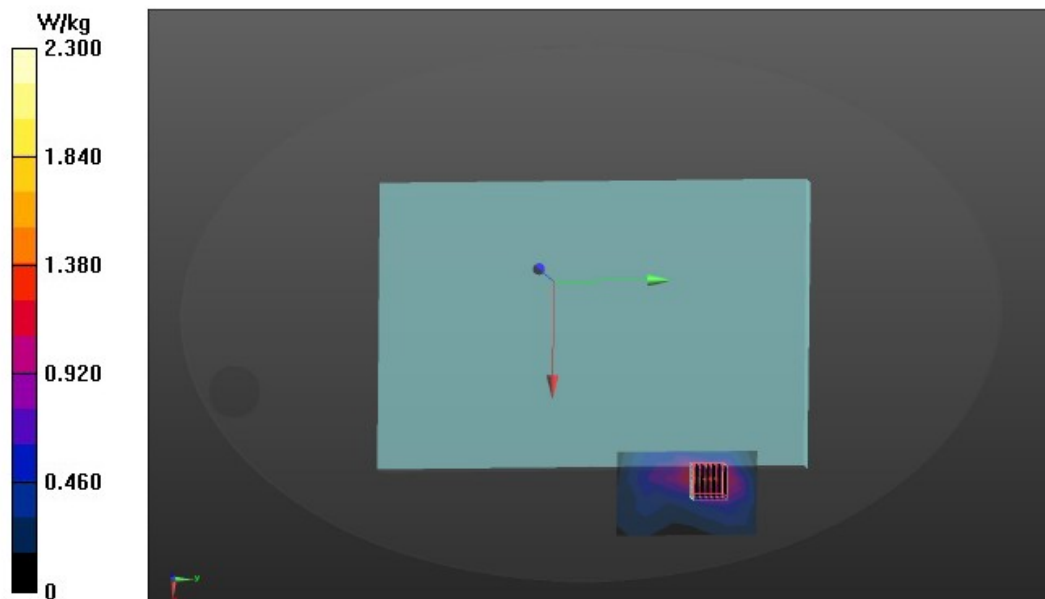

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P8 802.11a CH157 5785MHz ant2**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.467$  S/m;  $\epsilon_r = 35.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5785 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.40 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.369 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 4.63 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.294 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 2.06 W/kg

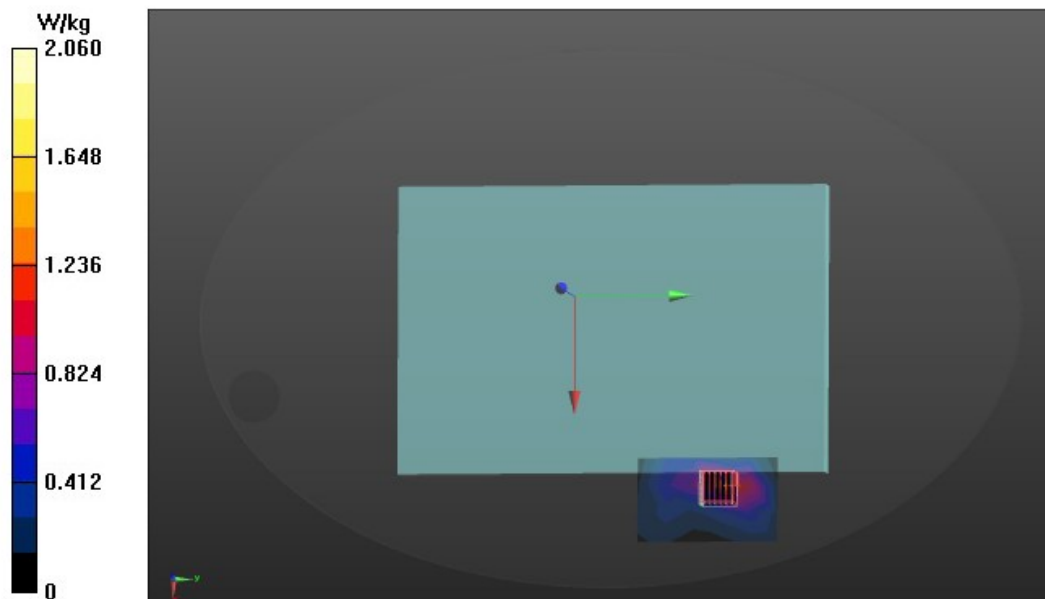

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P9 802.11a CH165 5825MHz ant2**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.481$  S/m;  $\epsilon_r = 35.009$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5825 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.32 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.298 V/m; Power Drift = 1.90 dB


Peak SAR (extrapolated) = 4.40 W/kg

**SAR(1 g) = 0.983 W/kg; SAR(10 g) = 0.272 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 1.90 W/kg

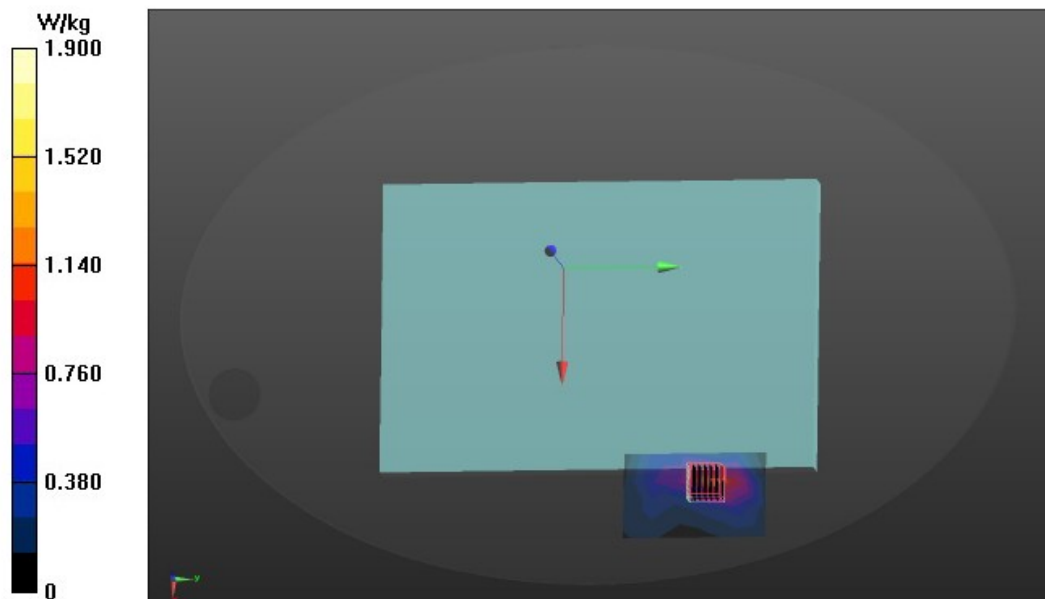

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P5 802.11a CH149 5745MHz ant1**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.452$  S/m;  $\epsilon_r = 35.172$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5745 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.835 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.112 V/m; Power Drift = 0.90 dB


Peak SAR (extrapolated) = 2.95 W/kg

**SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.217 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 42.3%

Maximum value of SAR (measured) = 1.40 W/kg

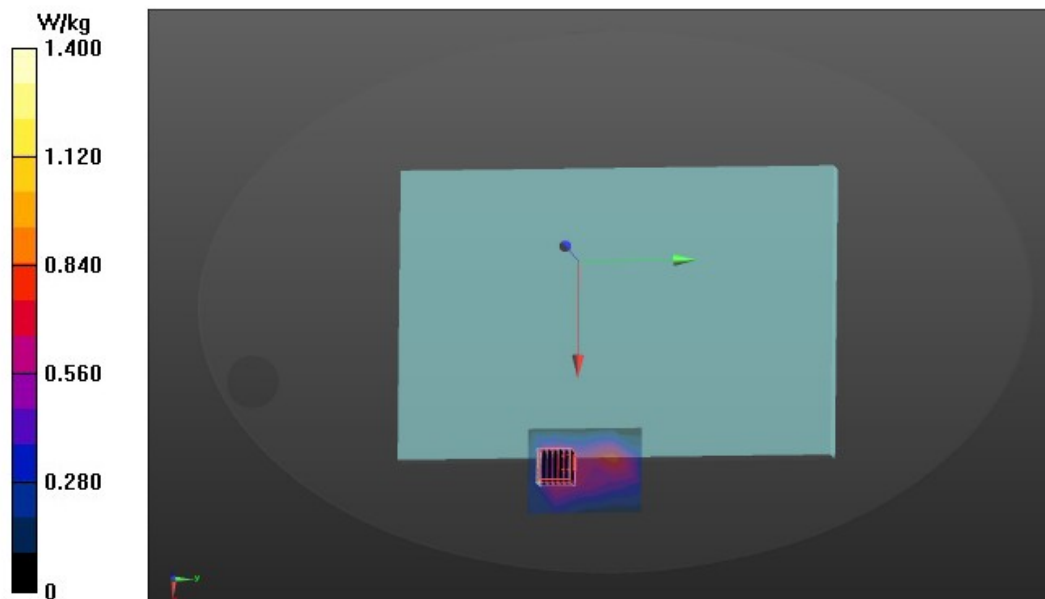

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P7 802.11a CH157 5785MHz ant1****DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.467$  S/m;  $\epsilon_r = 35.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5785 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.930 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.055 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.66 W/kg

**SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.169 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 1.14 W/kg

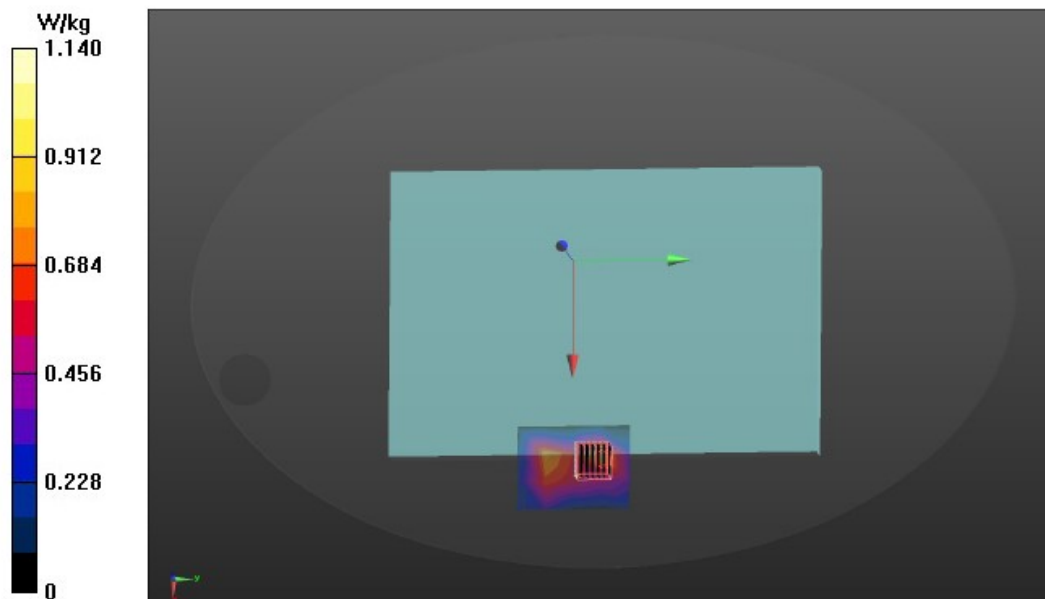

Date: 10/7/2020

Test Laboratory: Audix\_SAR Lab

**P19 802.11a CH165 5825MHz ant1****DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5825$  MHz,  $\sigma = 5.481$  S/m,  $\epsilon_r = 35.009$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5825 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**/Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.03 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 0.2140 V/m; Power Drift = 0.83 dB


Peak SAR (extrapolated) = 2.82 W/kg

**SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.182 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 1.23 W/kg

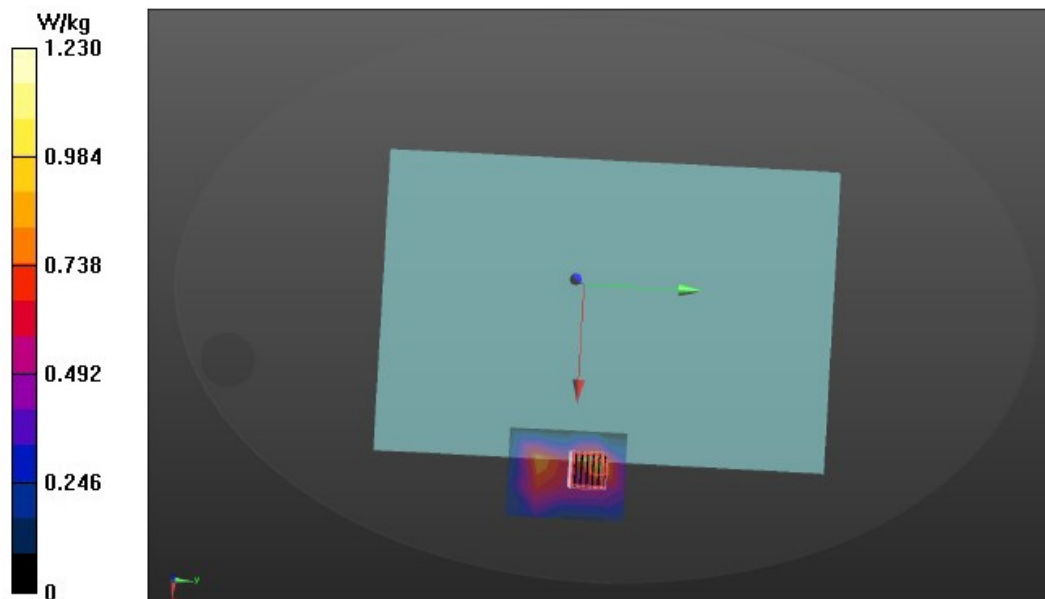

**Test SKU: SKU #2 with Speed Antenna**

Page 1 of 1

Date: 9/25/2020

Test Laboratory: Audix\_SAR Lab

**P13 802.11b CH7 2442MHz ant2****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.777$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.420 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.8590 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.730 W/kg

**SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.160 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 0.453 W/kg

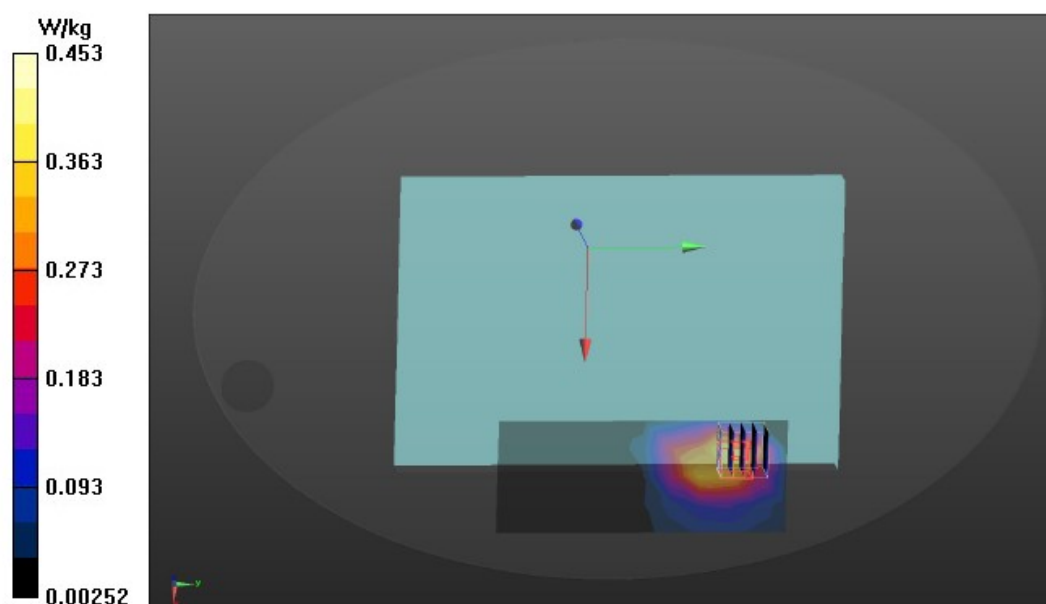



Date: 9/25/2020

Test Laboratory: Audix\_SAR Lab

**P12 802.11b CH7 2442MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.777$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.374 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.7960 V/m; Power Drift = 1.11 dB


Peak SAR (extrapolated) = 0.583 W/kg

**SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.148 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.4%

Maximum value of SAR (measured) = 0.420 W/kg

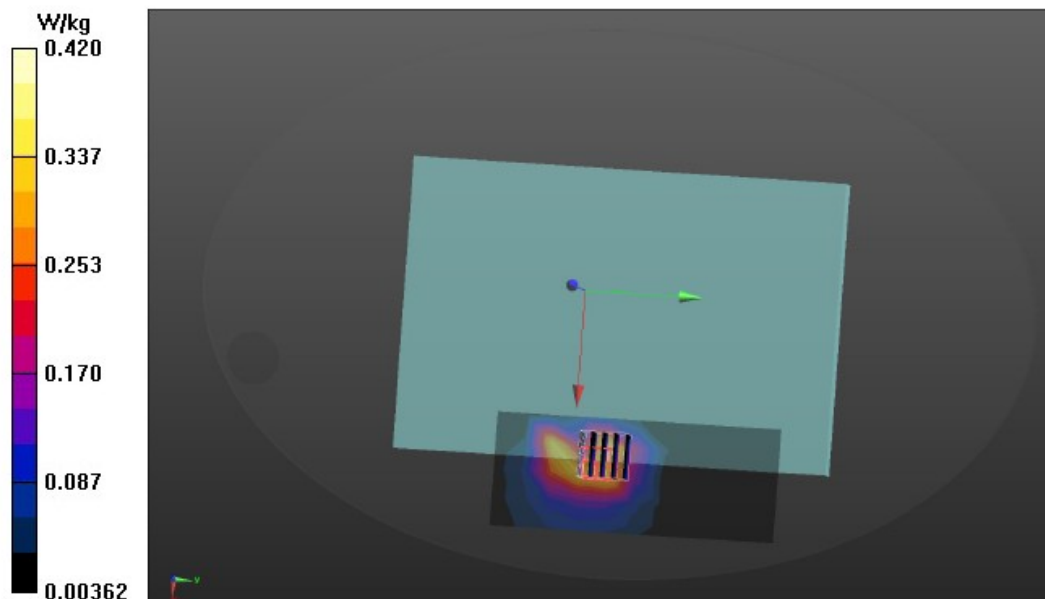

Date: 9/25/2020

Test Laboratory: Audix\_SAR Lab

**P14 GFSK CH39 2441MHz****DUT: 13U70P(SPEED)**


Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3  
Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.775$  S/m;  $\epsilon_r = 39.641$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(7.69, 7.69, 7.69) @ 2441 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm  
Maximum value of SAR (measured) = 0.0251 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 0.6690 V/m; Power Drift = 1.35 dB  
Peak SAR (extrapolated) = 0.0440 W/kg  
**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.011 W/kg**  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 62.3%  
Maximum value of SAR (measured) = 0.0289 W/kg

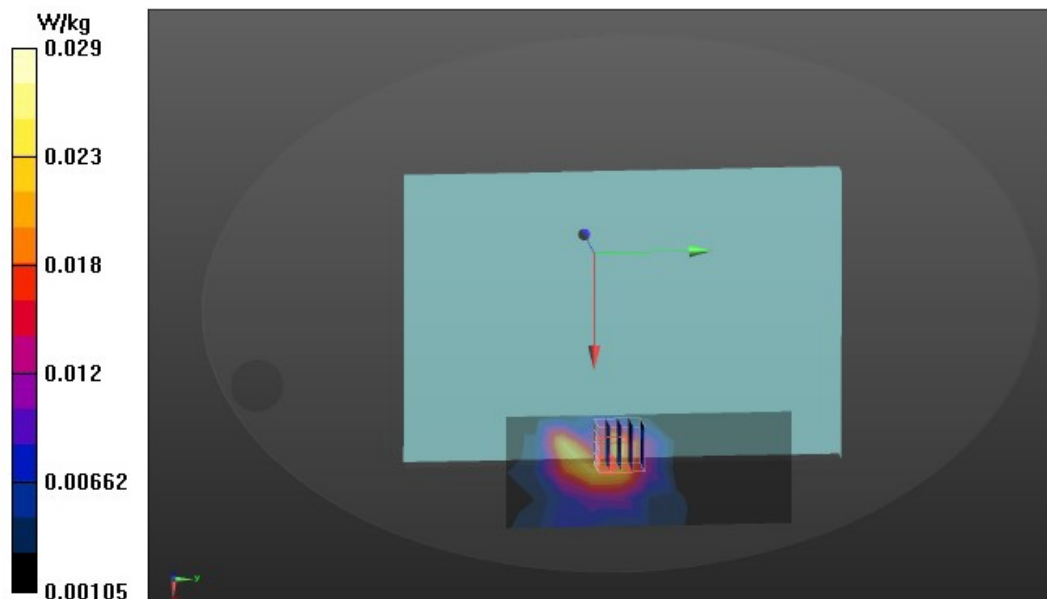

Date: 9/23/2020

Test Laboratory: Audix\_SAR Lab

**P2 802.11a CH48 5240MHz ant2****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.892$  S/m;  $\epsilon_r = 36.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(5.25, 5.25, 5.25) @ 5240 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x25x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.829 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 0.9930 V/m; Power Drift = 0.47 dB


Peak SAR (extrapolated) = 2.48 W/kg

**SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.221 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 1.22 W/kg

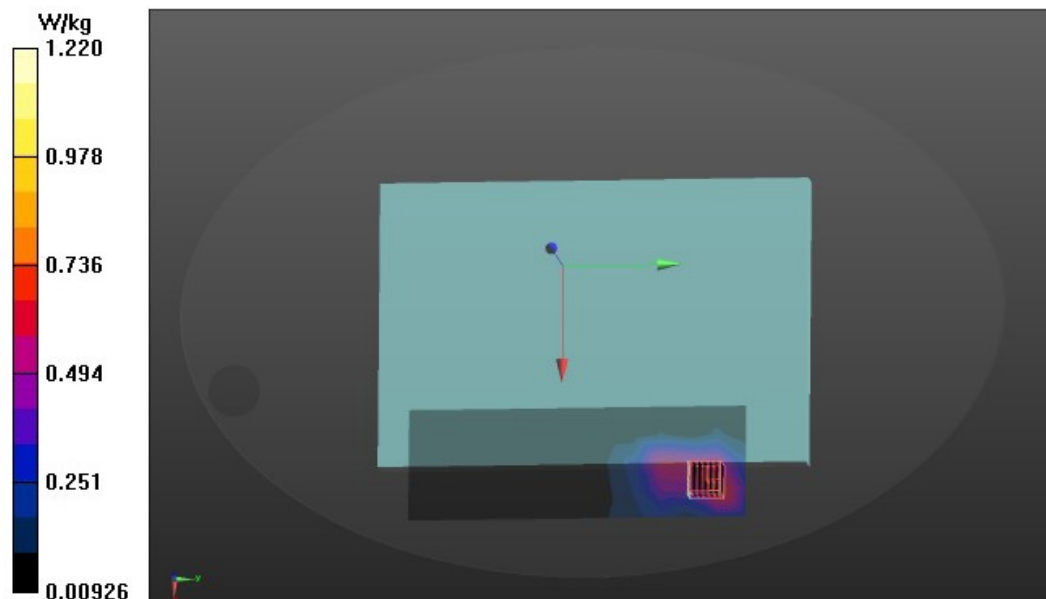

Date: 9/23/2020

Test Laboratory: Audix\_SAR Lab

**P1 802.11a CH48 5240MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.892$  S/m;  $\epsilon_r = 36.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(5.25, 5.25, 5.25) @ 5240 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5 0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.870 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.777 V/m; Power Drift = 0.42 dB


Peak SAR (extrapolated) = 2.55 W/kg

**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.258 W/kg**

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 1.33 W/kg

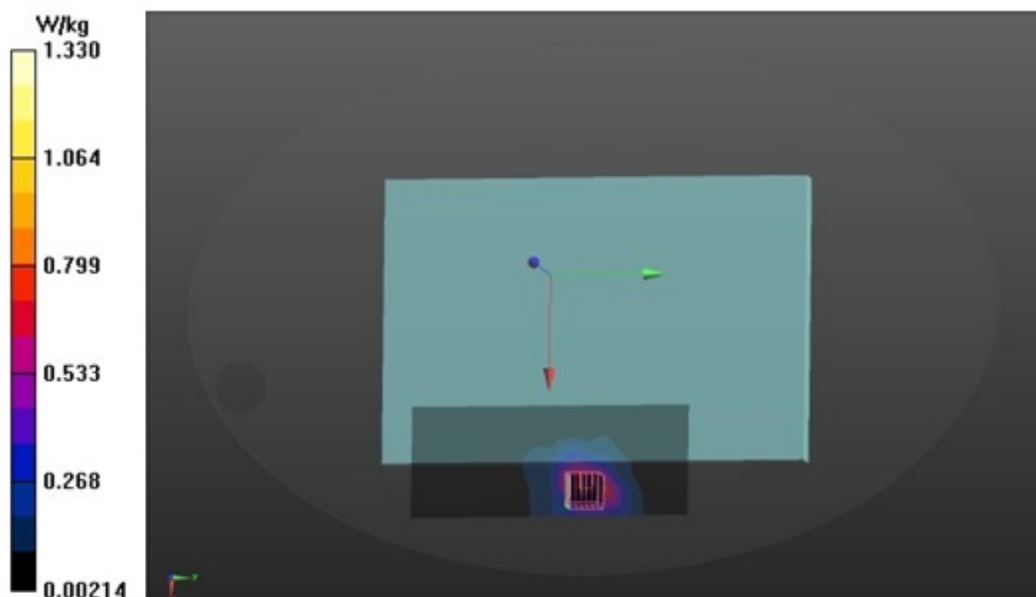

Test Laboratory: Audix\_SAR Lab

**P4 802.11a CH116 5580MHz ant2****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.268$  S/m;  $\epsilon_r = 35.435$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5580 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x13x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 2.19 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.618 V/m; Power Drift = -1.62 dB


Peak SAR (extrapolated) = 4.92 W/kg

**SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.427 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 2.29 W/kg

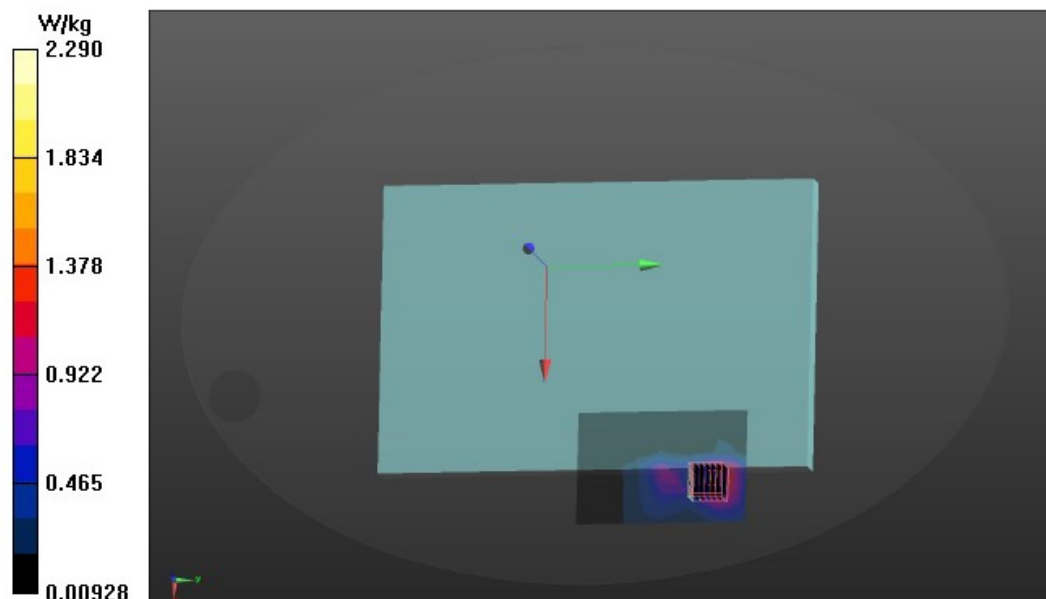

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P3 802.11a CH116 5580MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.268$  S/m;  $\epsilon_r = 35.435$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5580 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = -29.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x13x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.49 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.218 V/m; Power Drift = 1.62 dB


Peak SAR (extrapolated) = 3.22 W/kg

**SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.346 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 1.58 W/kg

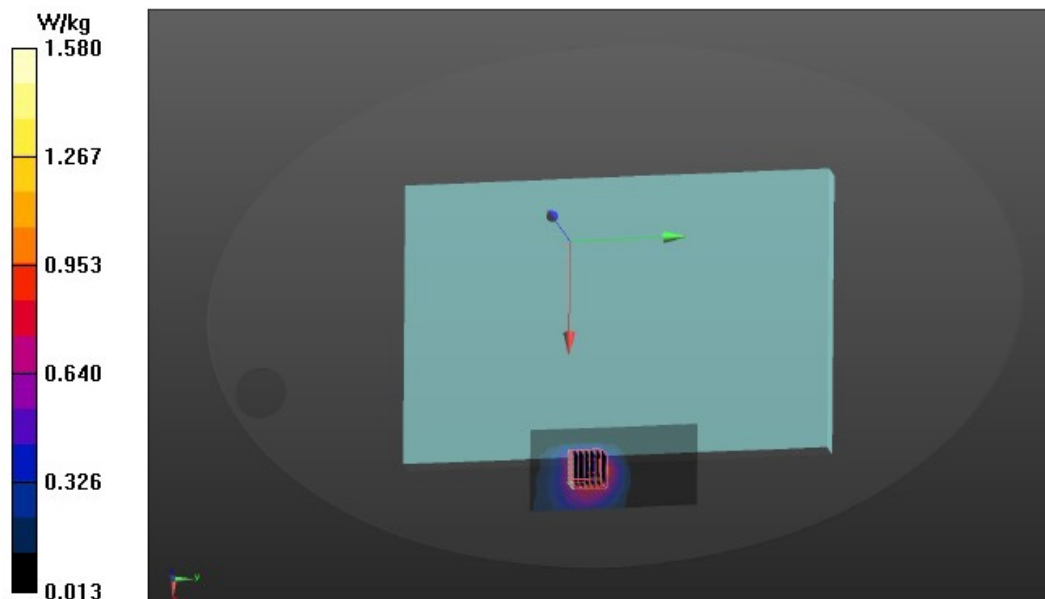

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P11 802.11a CH140 5700MHz ant2****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.4$  S/m;  $\epsilon_r = 35.227$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5700 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.939 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.330 V/m; Power Drift = 0.78 dB


Peak SAR (extrapolated) = 2.30 W/kg

**SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.201 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 1.01 W/kg

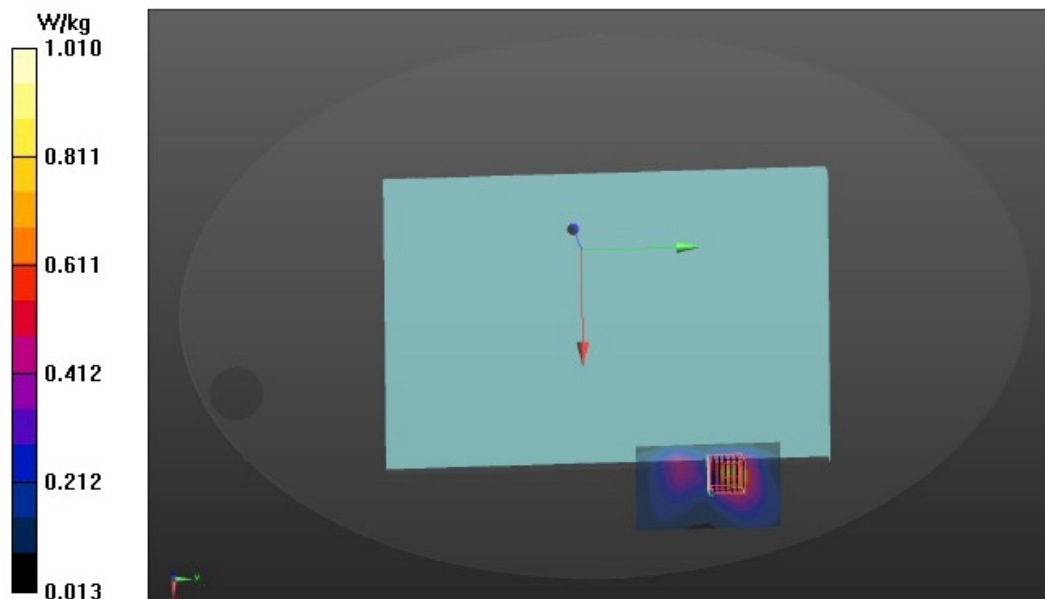

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P6 802.11a CH149 5745MHz ant2**

**DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 5.452 \text{ S/m}$ ;  $\epsilon_r = 35.172$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5745 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.32 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2.5\text{mm}$

Reference Value = 1.212 V/m; Power Drift = 1.39 dB


Peak SAR (extrapolated) = 5.52 W/kg

**SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.451 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 2.46 W/kg

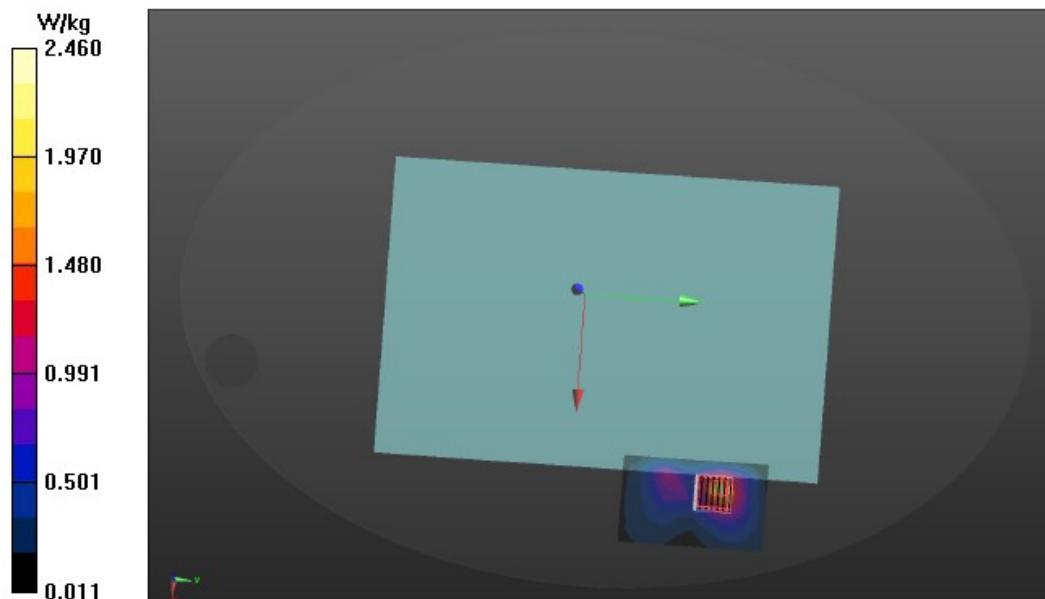



Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P8 802.11a CH157 5785MHz ant2**

**DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.467$  S/m;  $\epsilon_r = 35.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5785 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 2.25 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 0.9720 V/m; Power Drift = 1.25 dB


Peak SAR (extrapolated) = 6.39 W/kg

**SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.423 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.3%

Maximum value of SAR (measured) = 2.30 W/kg

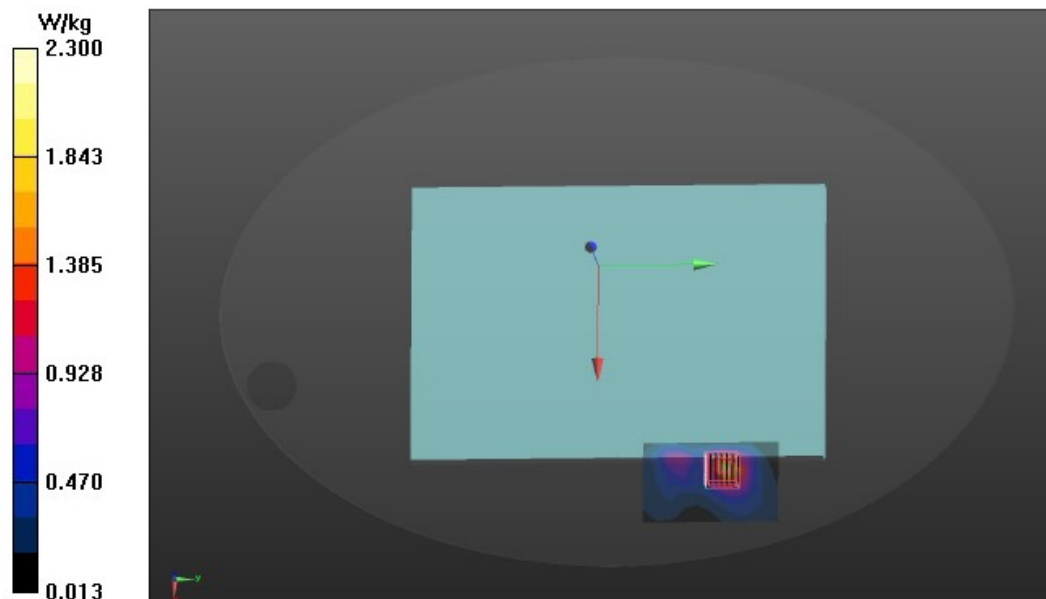

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P9 802.11a CH165 5825MHz ant2****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.481$  S/m;  $\epsilon_r = 35.009$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5825 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.54 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.293 V/m; Power Drift = 1.08 dB


Peak SAR (extrapolated) = 3.63 W/kg

**SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.323 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 1.64 W/kg

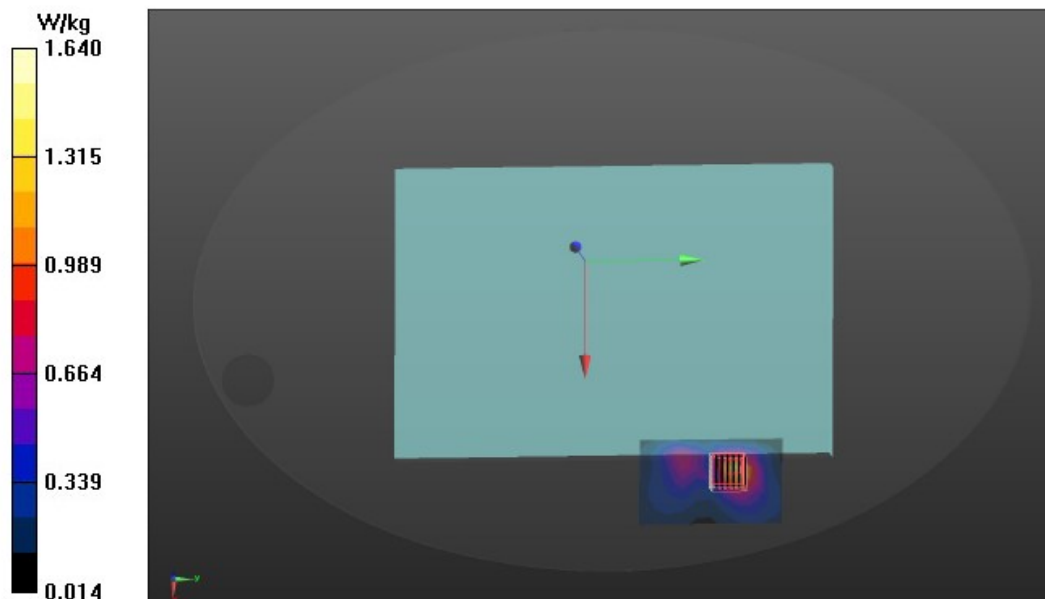

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P10 802.11a CH140 5700MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.4$  S/m;  $\epsilon_r = 35.227$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5700 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.813 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.305 V/m; Power Drift = 1.43 dB


Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.205 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 0.909 W/kg

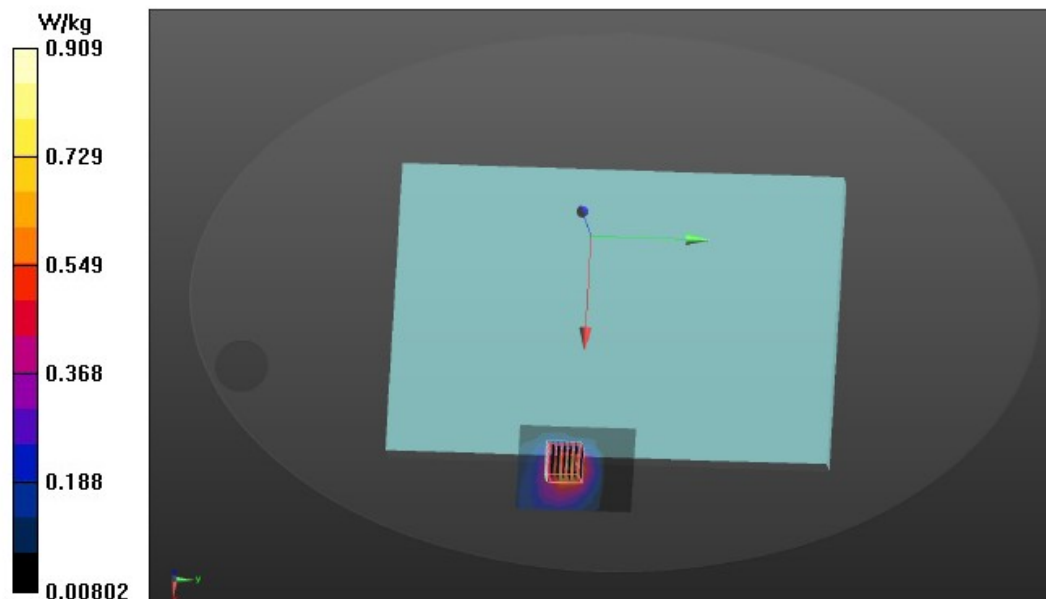

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P5 802.11a CH149 5745MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.452$  S/m;  $\epsilon_r = 35.172$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5745 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.70 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.423 V/m; Power Drift = 1.10 dB


Peak SAR (extrapolated) = 3.93 W/kg

**SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.368 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 1.83 W/kg

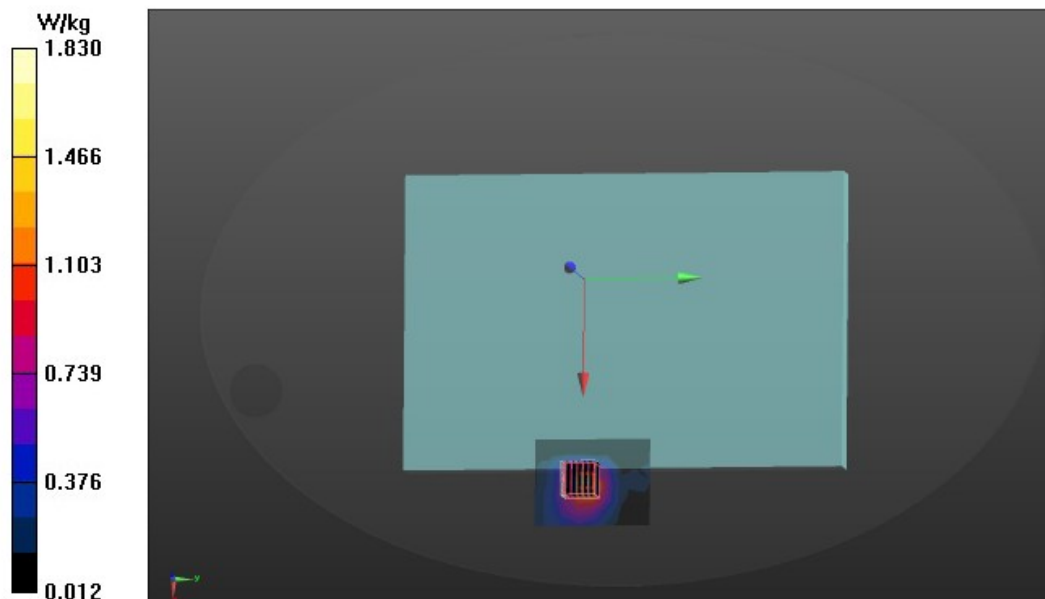

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P7 802.11a CH157 5785MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz,  $\sigma = 5.467$  S/m,  $\epsilon_r = 35.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5785 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.838 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.254 V/m; Power Drift = 1.03 dB


Peak SAR (extrapolated) = 2.01 W/kg

**SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.186 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 0.910 W/kg

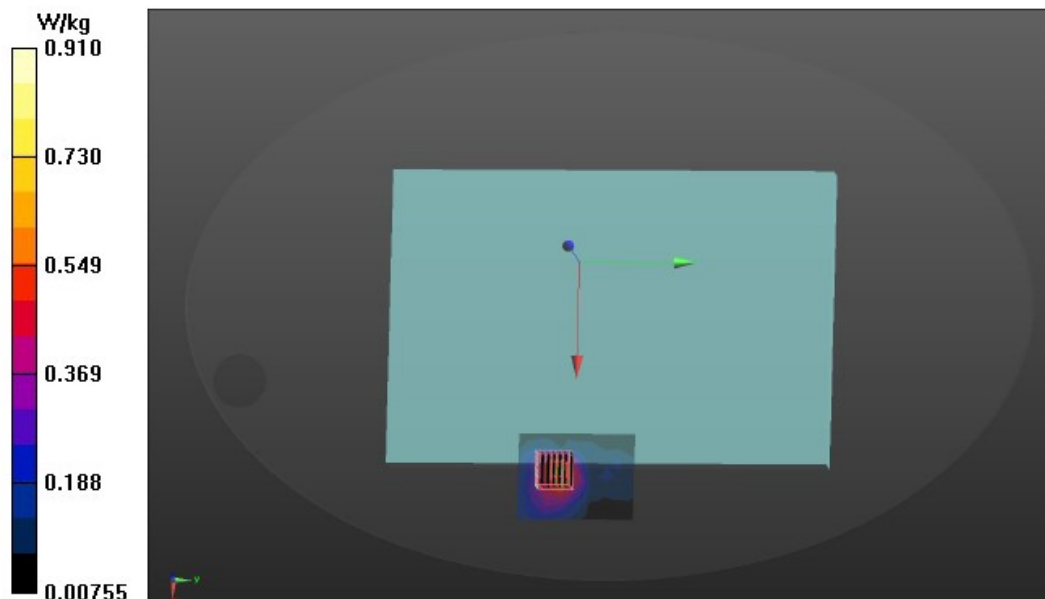

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P19 802.11a CH165 5825MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.481$  S/m;  $\epsilon_r = 35.009$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5825 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.22 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.793 V/m; Power Drift = 0.85 dB


Peak SAR (extrapolated) = 2.82 W/kg

**SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.257 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 42.2%

Maximum value of SAR (measured) = 1.34 W/kg

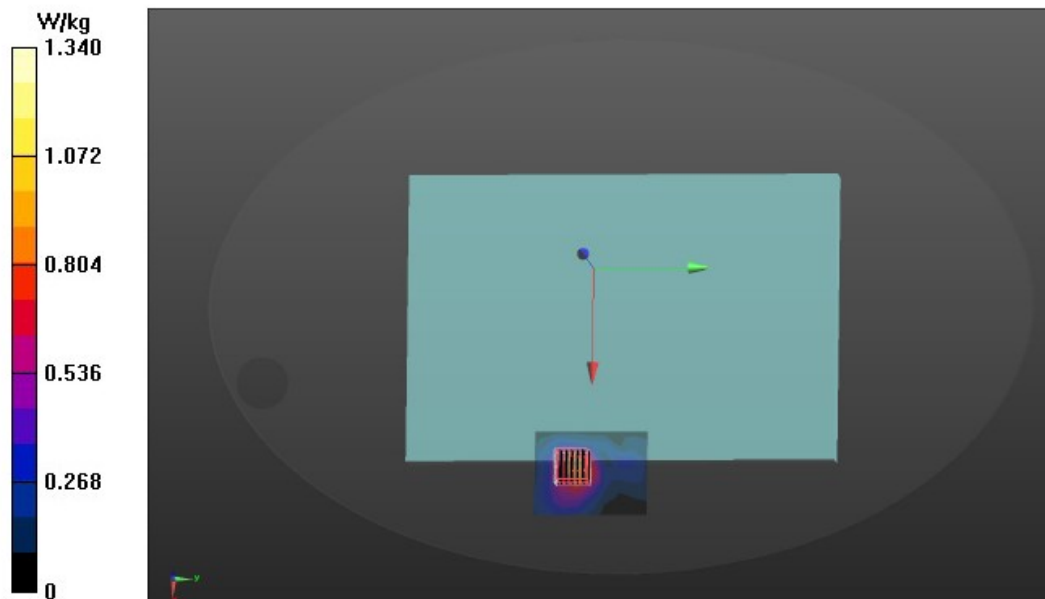



**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

APPENDIX A Page 31 of 41

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

---

# Repeated SAR measurement

Test SKU: SKU #1 with AWAN Antenna

Page 1 of 1

Date: 9/23/2020

Test Laboratory: Audix\_SAR Lab

**P21 802.11a CH116 5580MHz ant2**

**DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.268$  S/m;  $\epsilon_r = 35.435$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5580 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.36 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 0.3840 V/m; Power Drift = 0.32 dB


Peak SAR (extrapolated) = 4.35 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.295 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 1.94 W/kg

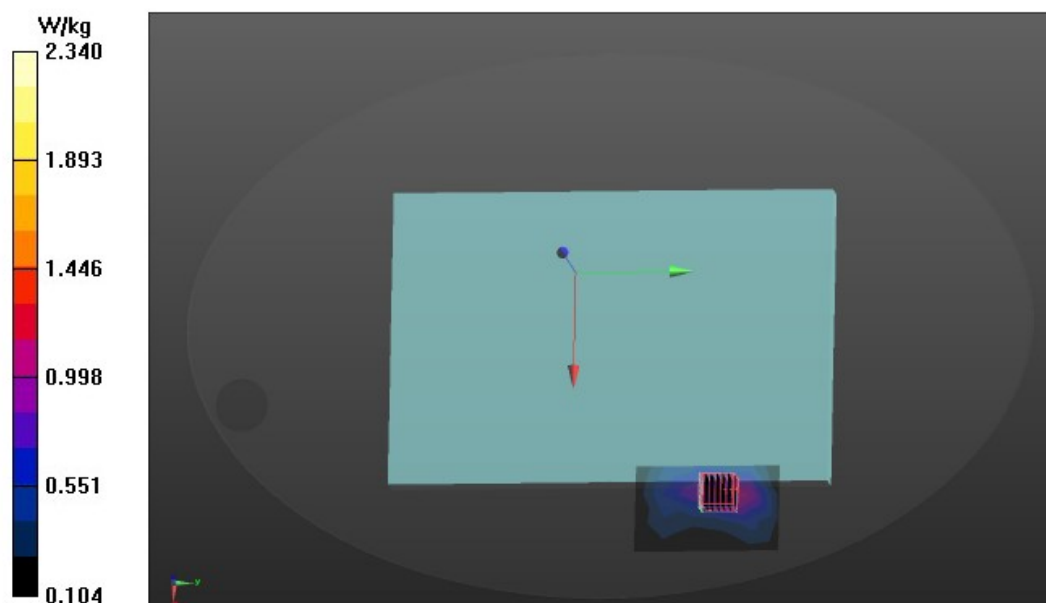



Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P22 802.11a CH149 5745MHz ant2**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.452$  S/m;  $\epsilon_r = 35.172$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5745 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.45 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.244 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 5.06 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.374 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 2.22 W/kg

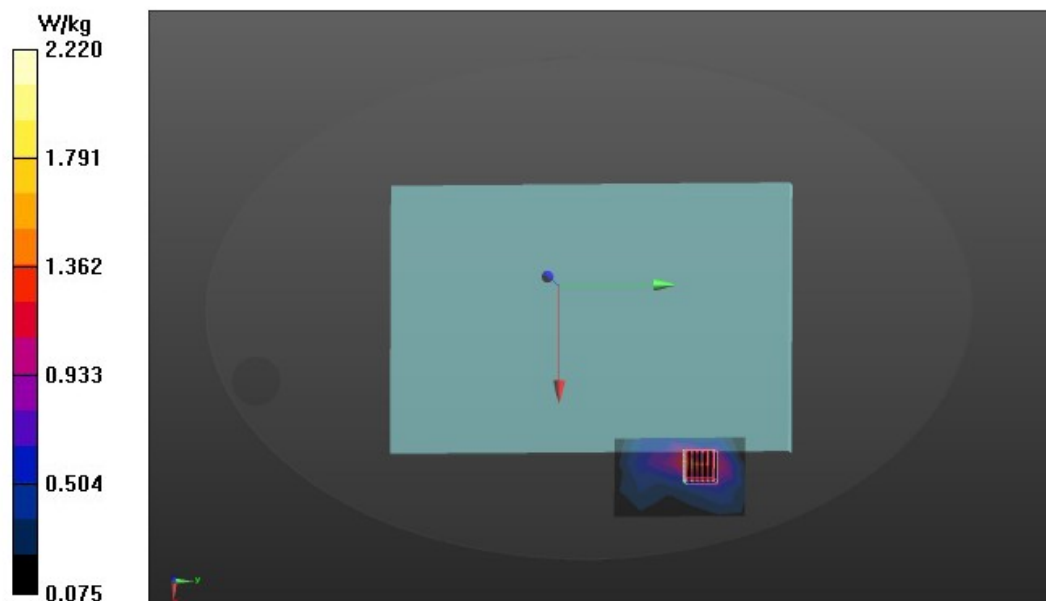

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P23 802.11a CH157 5785MHz ant2**

DUT: 13U70P(AWAN)

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.467$  S/m;  $\epsilon_r = 35.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5785 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.40 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.125 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 4.23 W/kg

**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.233 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 42.5%

Maximum value of SAR (measured) = 2.29 W/kg

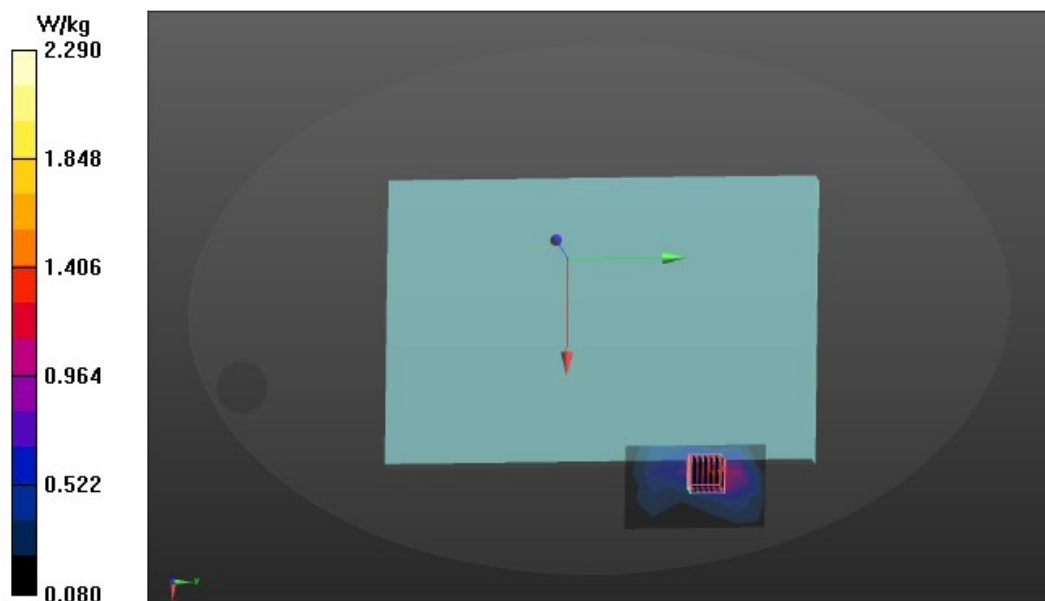

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P24 802.11a CH165 5825MHz ant2****DUT: 13U70P(AWAN)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5825$  MHz,  $\sigma = 5.481$  S/m,  $\epsilon_r = 35.009$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5825 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.44 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.459 V/m; Power Drift = 1.71 dB


Peak SAR (extrapolated) = 4.81 W/kg

**SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.255 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 1.63 W/kg

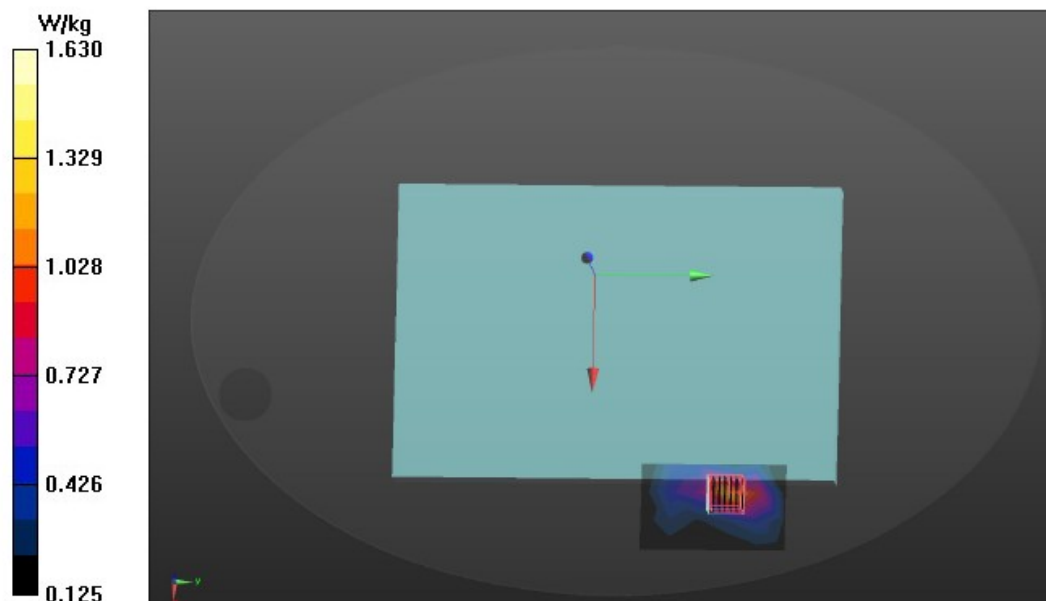

**Test SKU: SKU #2 with Speed Antenna**

Page 1 of 1

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P22 802.11a CH116 5580MHz ant2****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.268$  S/m;  $\epsilon_r = 35.435$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5580 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.88 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.596 V/m; Power Drift = -0.96 dB


Peak SAR (extrapolated) = 4.39 W/kg

**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.384 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 2.01 W/kg

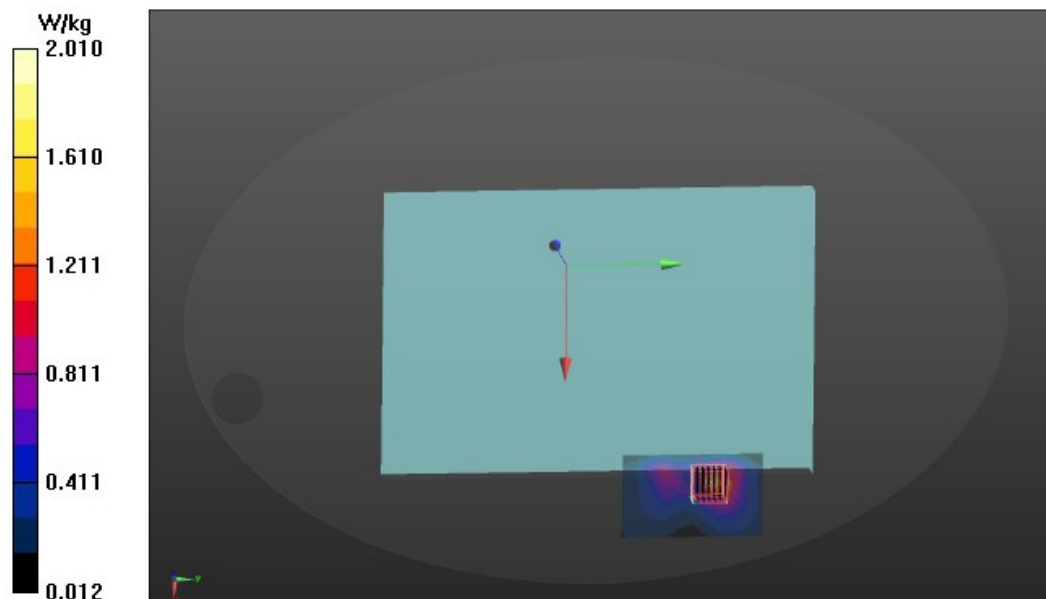

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P21 802.11a CH116 5580MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.268$  S/m;  $\epsilon_r = 35.435$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.63, 4.63, 4.63) @ 5580 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.14 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.987 V/m; Power Drift = -1.47 dB


Peak SAR (extrapolated) = 3.03 W/kg

**SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.330 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 1.48 W/kg

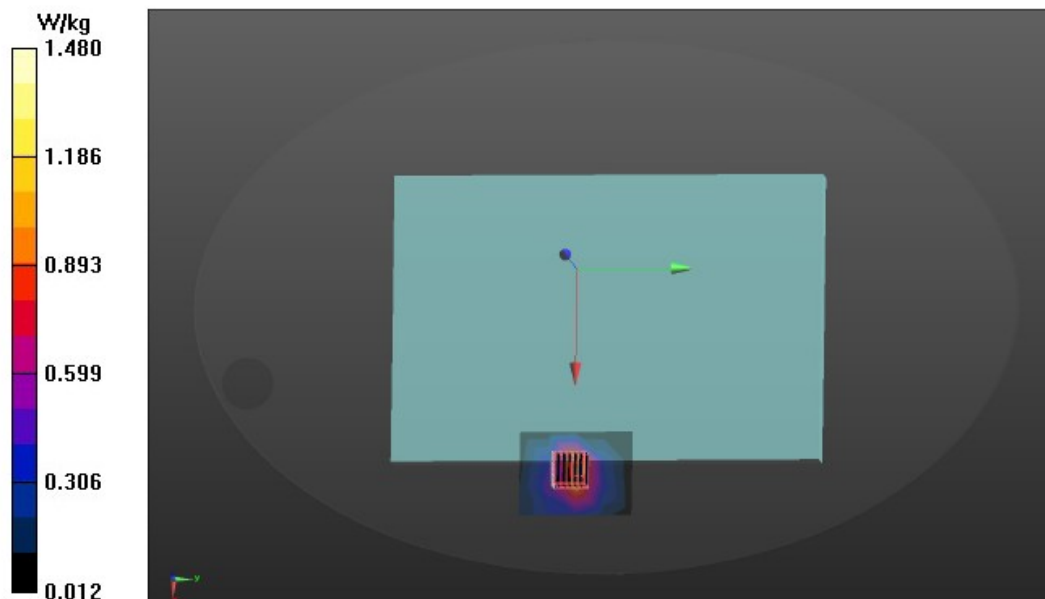

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P25 802.11a CH149 5745MHz ant2**

**DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 5.452 \text{ S/m}$ ;  $\epsilon_r = 35.172$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5745 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.31 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2.5\text{mm}$

Reference Value = 1.257 V/m; Power Drift = 1.81 dB


Peak SAR (extrapolated) = 5.54 W/kg

**SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.454 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 41.2%

Maximum value of SAR (measured) = 2.46 W/kg

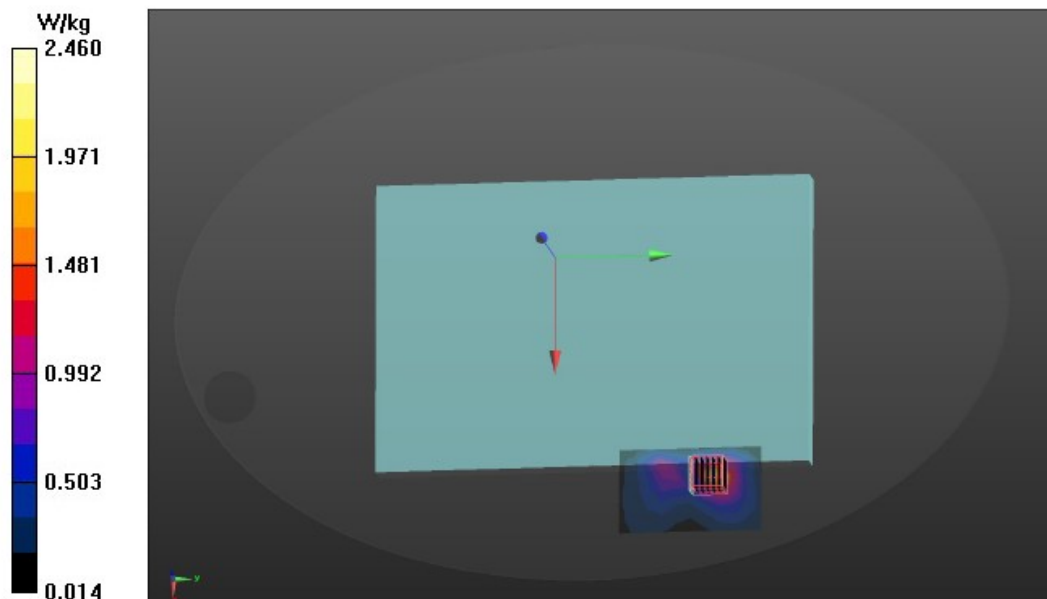

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P27 802.11a CH157 5785MHz ant2****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.467$  S/m;  $\epsilon_r = 35.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5785 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.83 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 0.6140 V/m; Power Drift = 0.71 dB


Peak SAR (extrapolated) = 4.47 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.373 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 1.99 W/kg

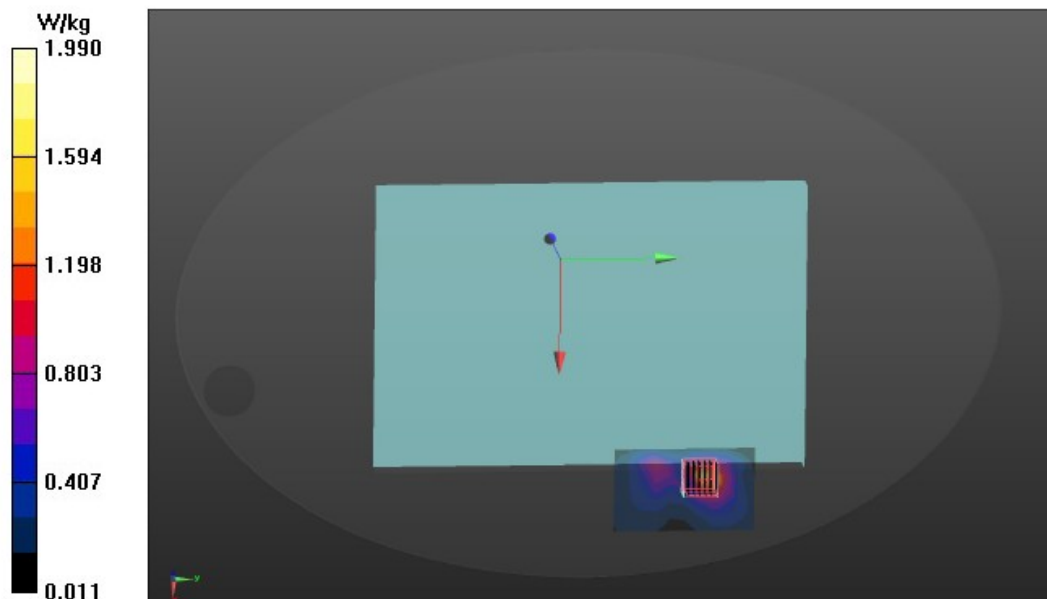

Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P29 802.11a CH165 5825MHz ant2****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.481$  S/m;  $\epsilon_r = 35.009$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5825 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.53 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.011 V/m; Power Drift = 0.60 dB


Peak SAR (extrapolated) = 3.70 W/kg

**SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.322 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 41.1%

Maximum value of SAR (measured) = 1.65 W/kg

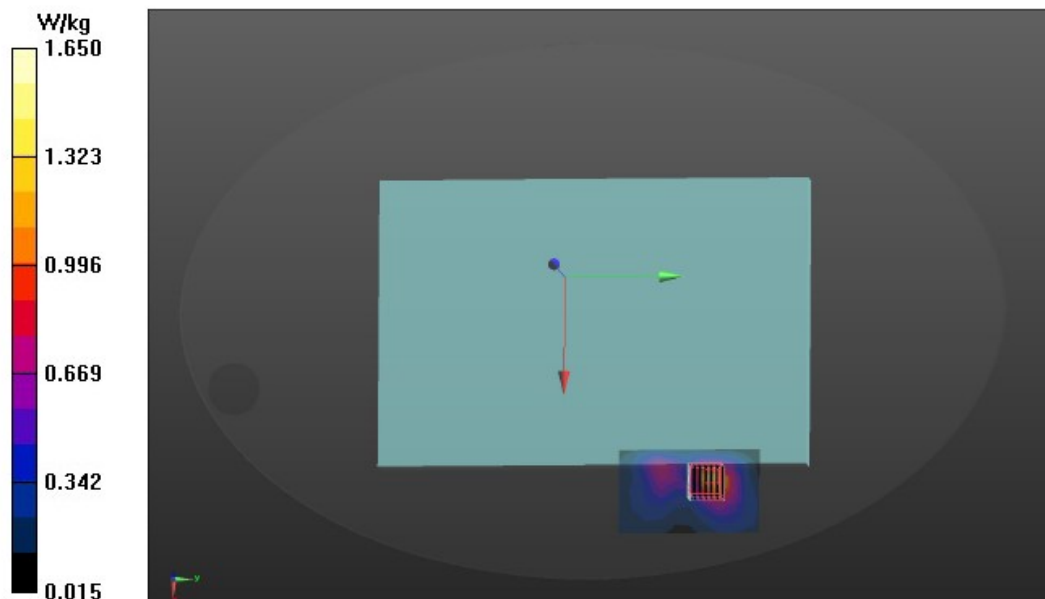



Date: 9/24/2020

Test Laboratory: Audix\_SAR Lab

**P24 802.11a CH149 5745MHz ant1****DUT: 13U70P(SPEED)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.452$  S/m;  $\epsilon_r = 35.172$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7375; ConvF(4.79, 4.79, 4.79) @ 5745 MHz; Calibrated: 12/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 5/6/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x9x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.71 W/kg

**Zoom Scan (7x7x9)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2.5$ mm

Reference Value = 1.496 V/m; Power Drift = -0.78 dB

Peak SAR (extrapolated) = 3.97 W/kg

**SAR(1 g) = 0.967 W/kg; SAR(10 g) = 0.377 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 1.87 W/kg

