


Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5300MHz)

Horizontal

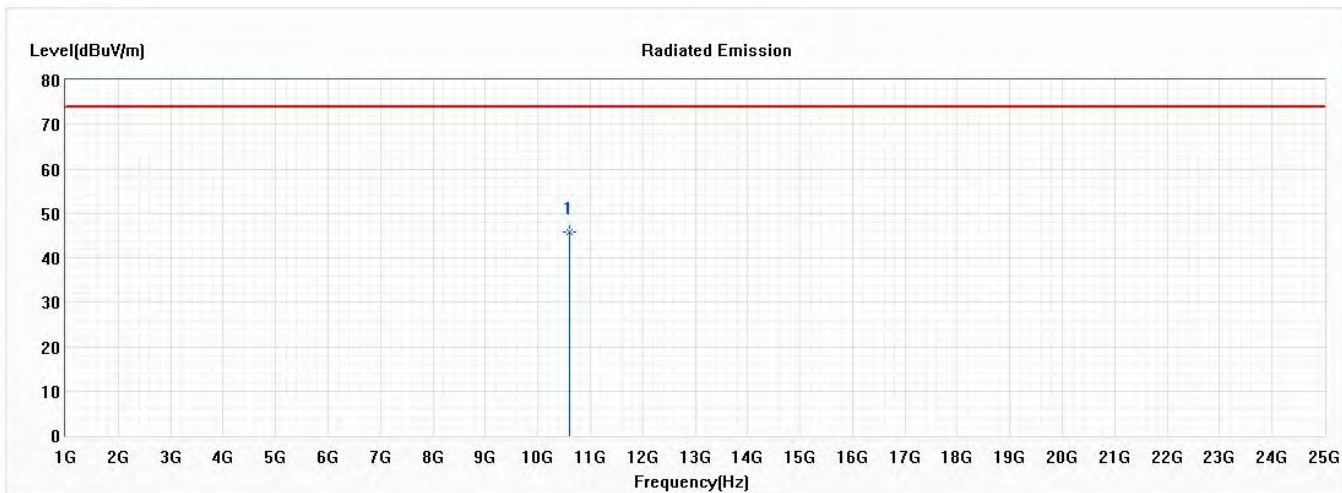


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10600.000 | 45.79 | 74.00 | -28.21 | 55.59 | -9.80 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5300MHz)

Vertical

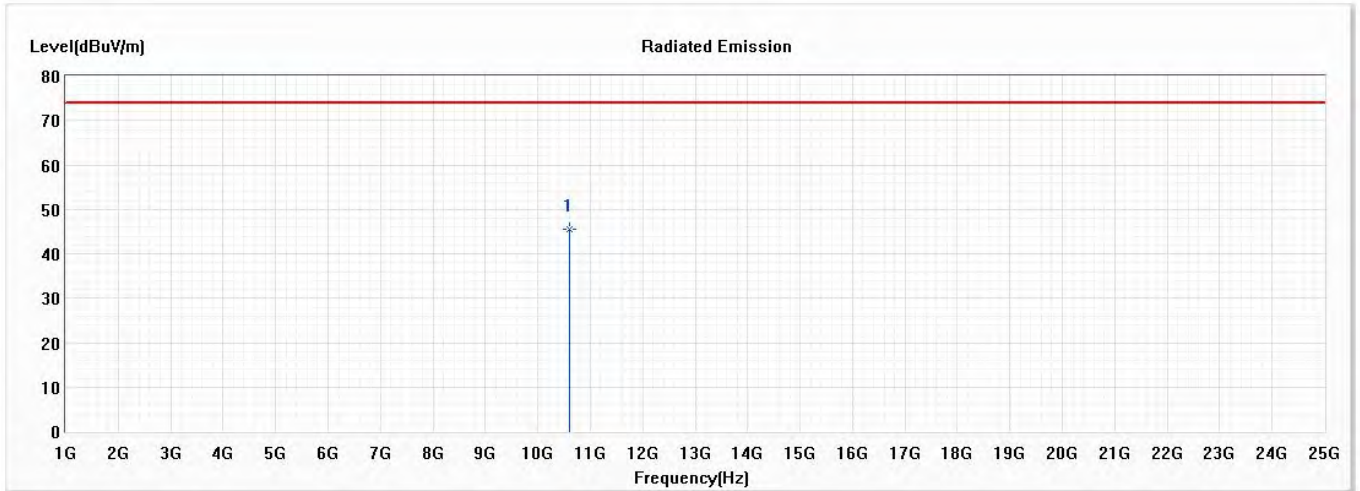


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10600.000 | 45.49 | 74.00 | -28.51 | 55.29 | -9.80 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5320MHz)

Horizontal

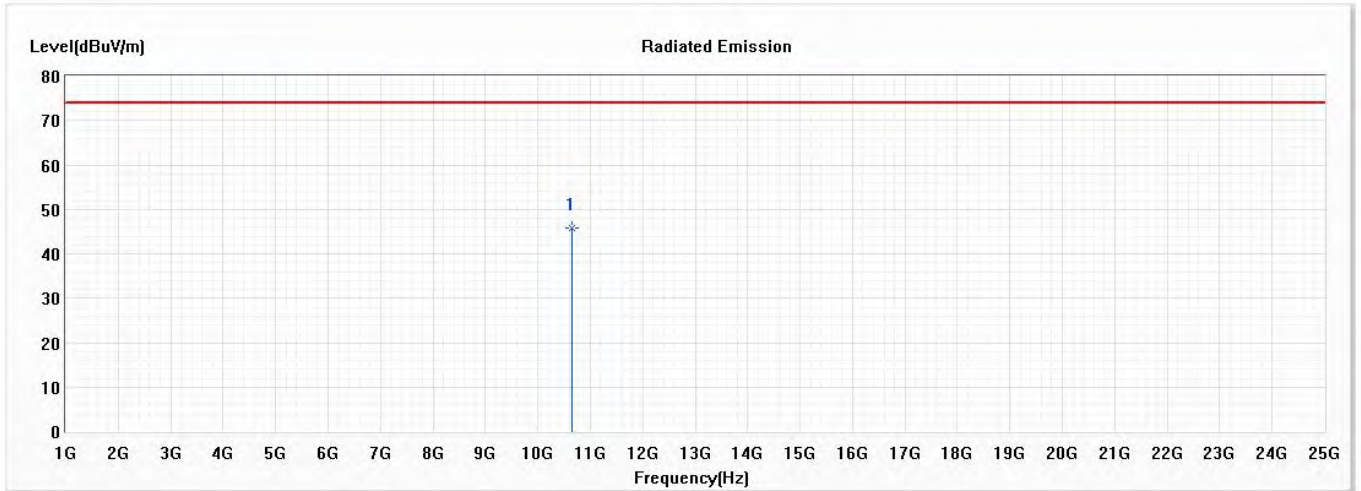


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10640.000 | 45.86 | 74.00 | -28.14 | 55.59 | -9.73 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5320MHz)

Vertical

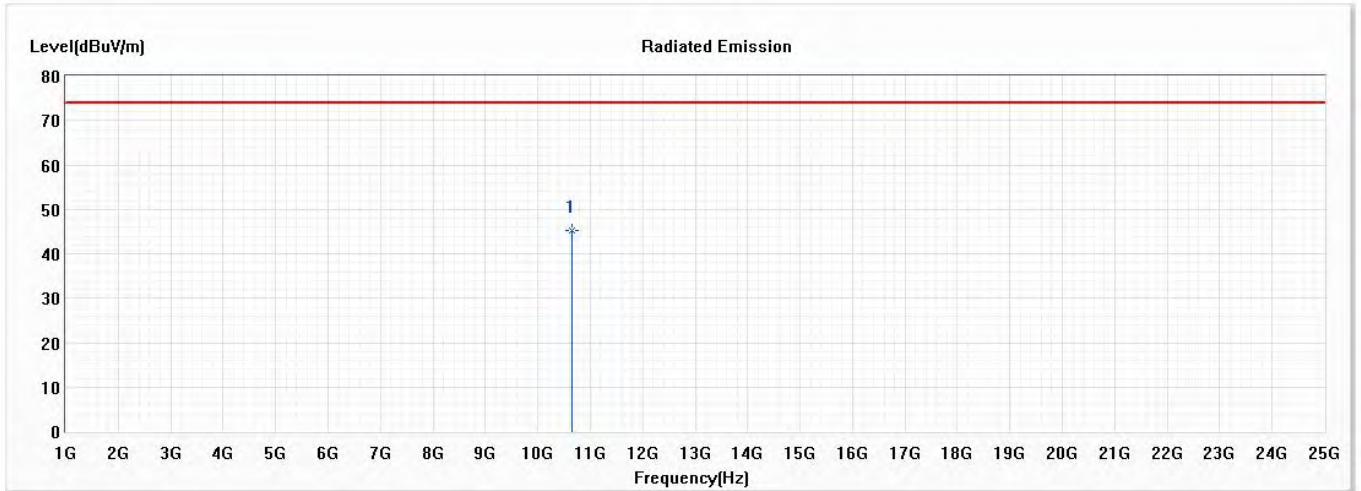


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10640.000 | 45.27 | 74.00 | -28.73 | 55.00 | -9.73 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5500MHz)

Horizontal

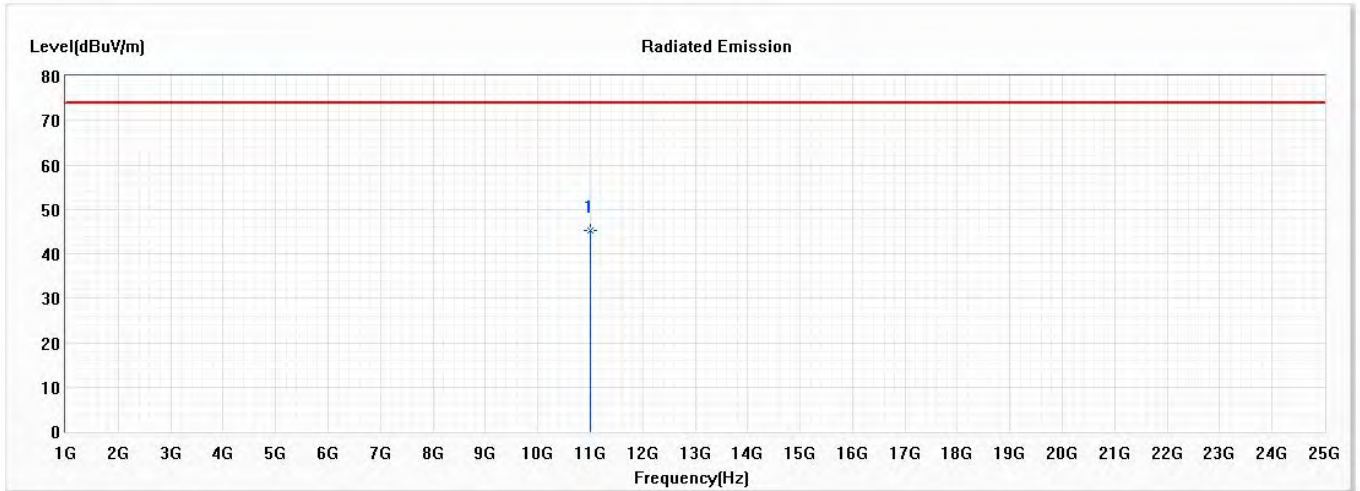


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11000.000 | 45.31 | 74.00 | -28.69 | 54.64 | -9.33 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5500MHz)

Vertical

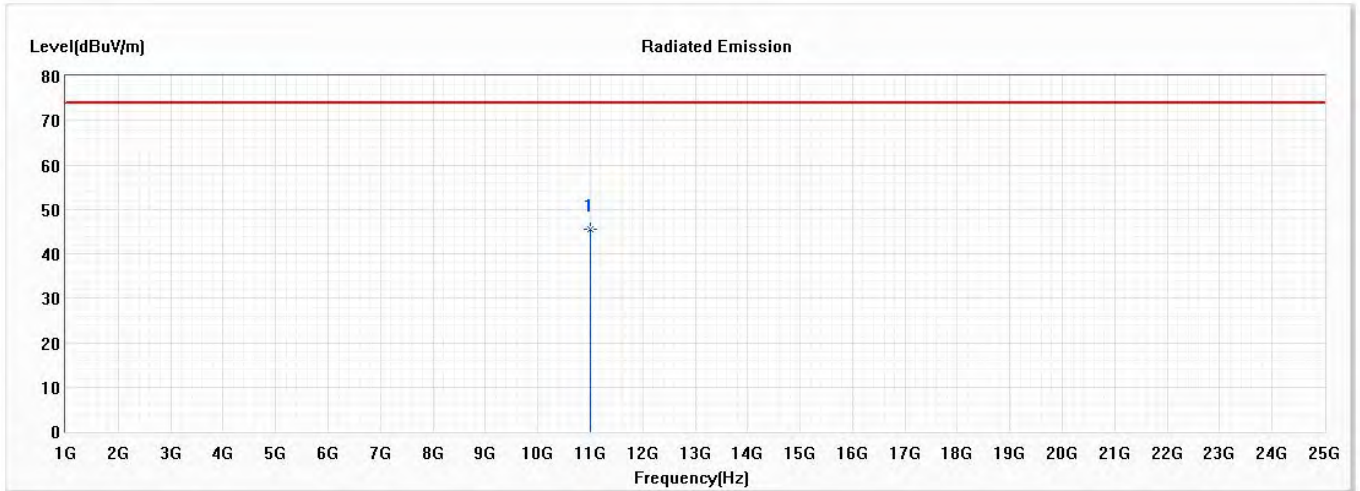


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11000.000 | 45.42 | 74.00 | -28.58 | 54.75 | -9.33 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5580MHz)

Horizontal

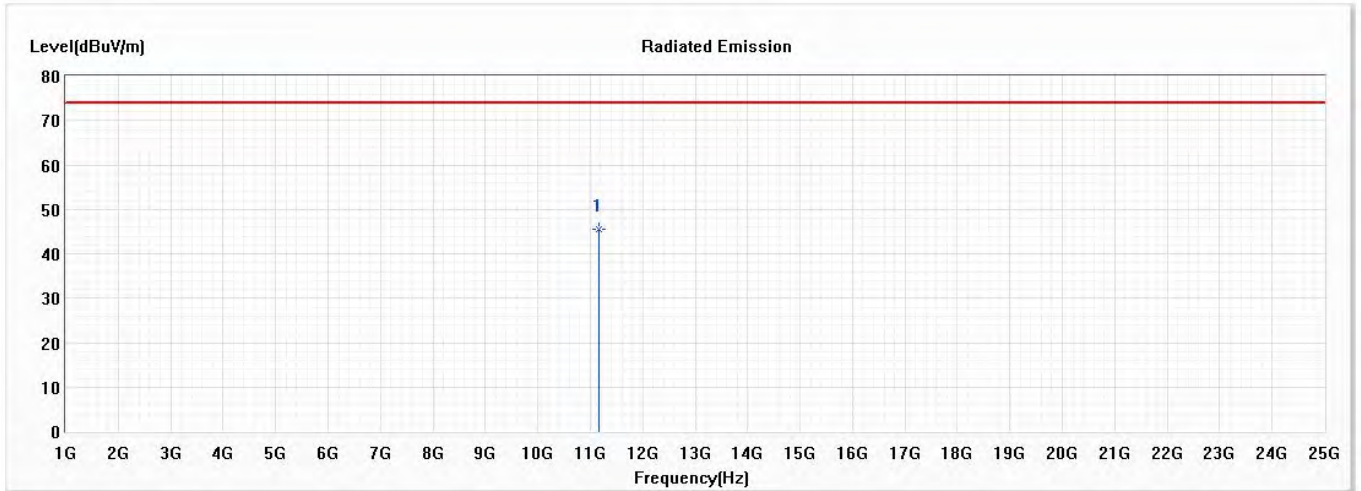


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11160.000 | 45.39 | 74.00 | -28.61 | 54.44 | -9.05 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5580MHz)

Vertical

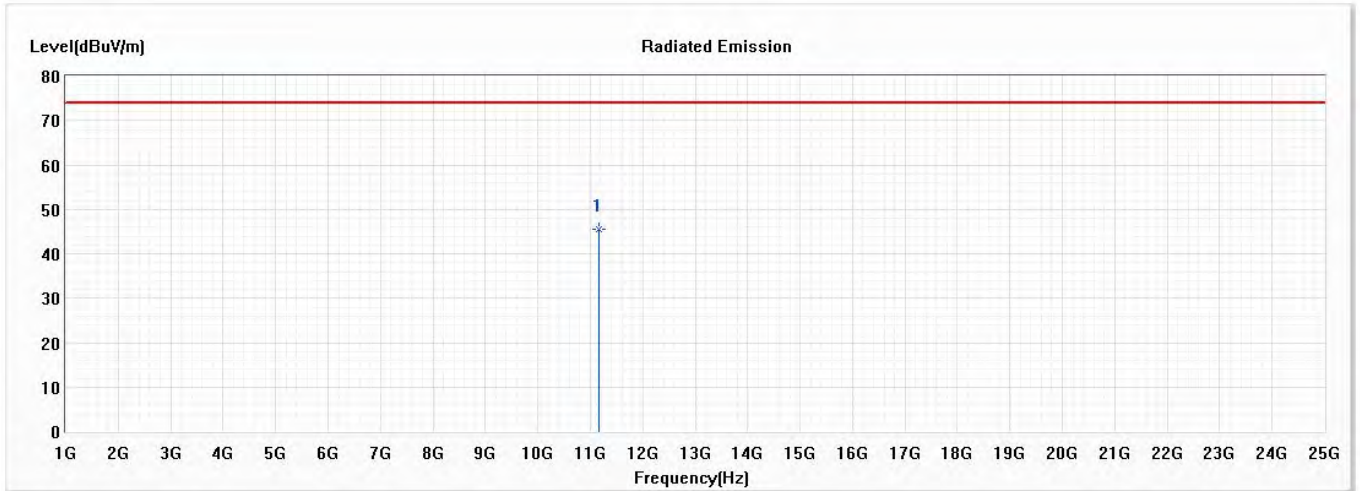


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11160.000 | 45.45 | 74.00 | -28.55 | 54.50 | -9.05 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5700MHz)

Horizontal

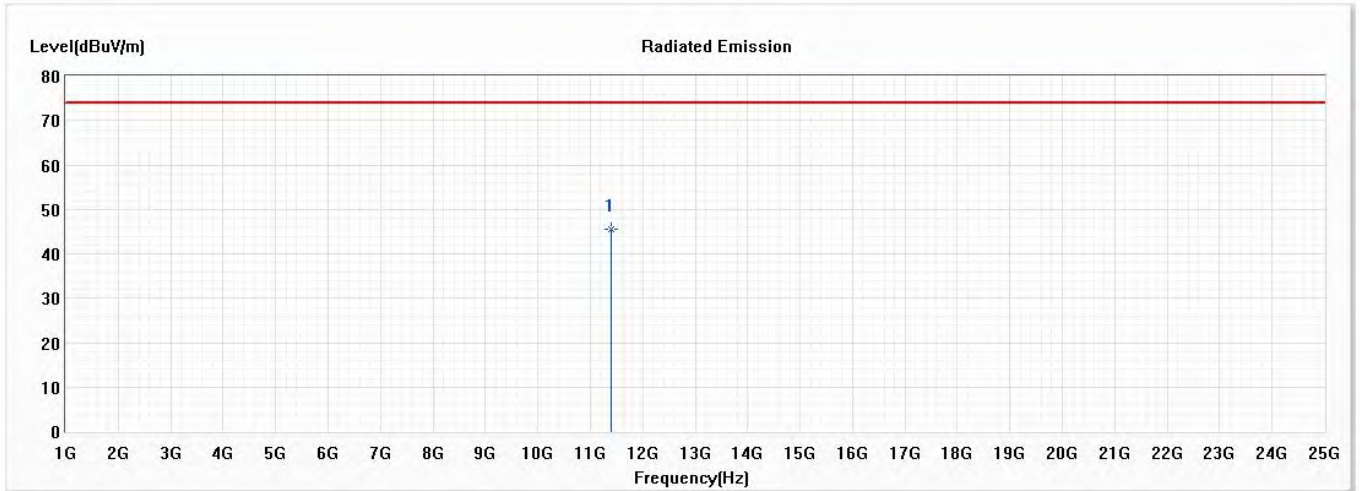


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11400.000 | 45.63 | 74.00 | -28.37 | 54.46 | -8.83 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5700MHz)

Vertical

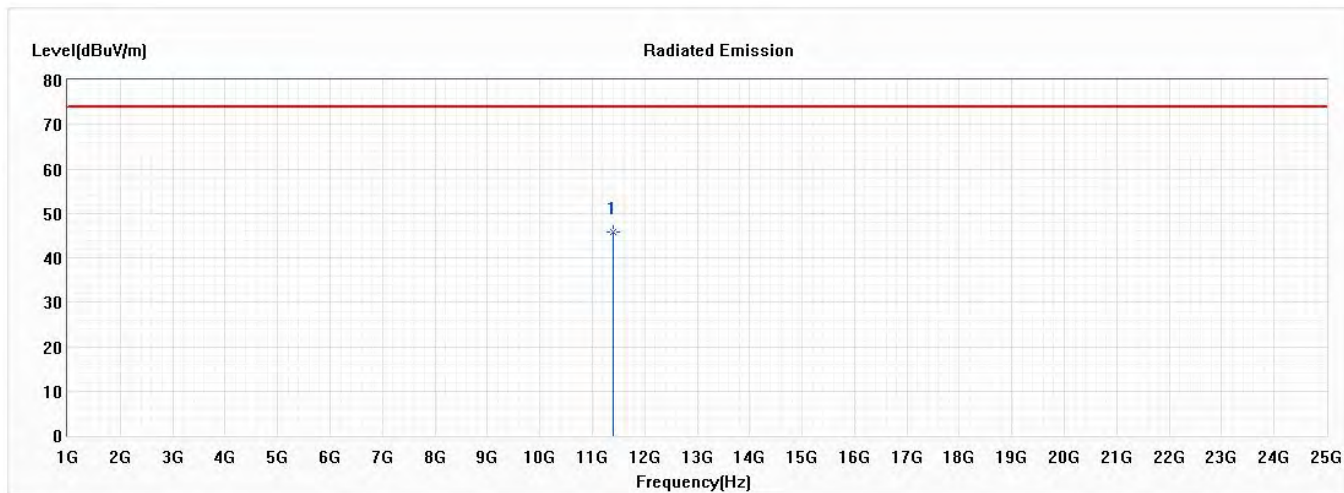


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11400.000 | 45.73 | 74.00 | -28.27 | 54.56 | -8.83 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5745MHz)

Horizontal

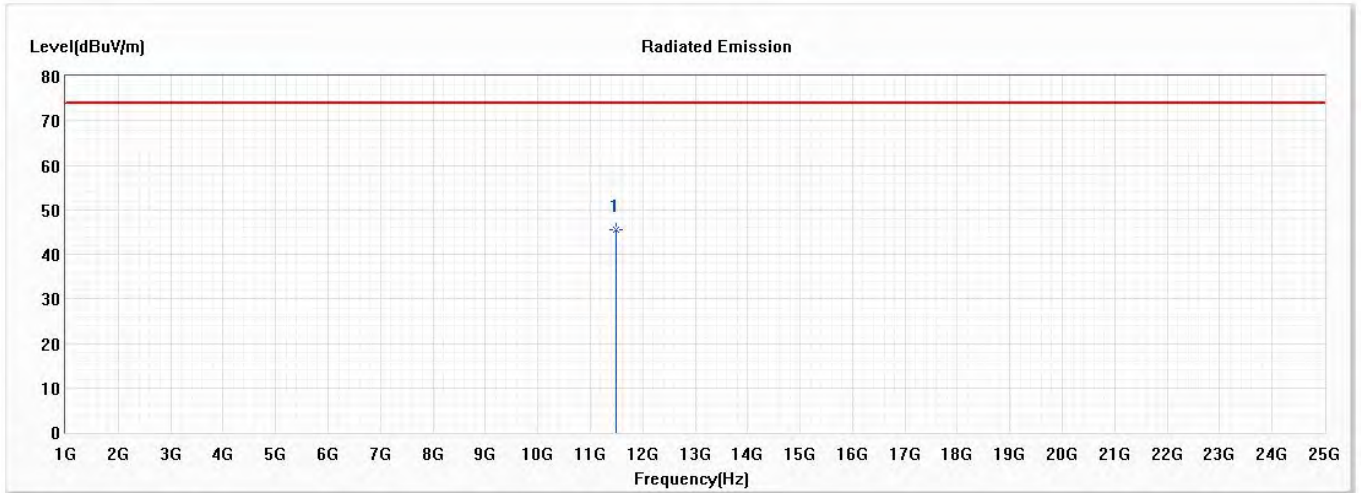


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11490.000 | 45.45 | 74.00 | -28.55 | 54.17 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5745MHz)

Vertical

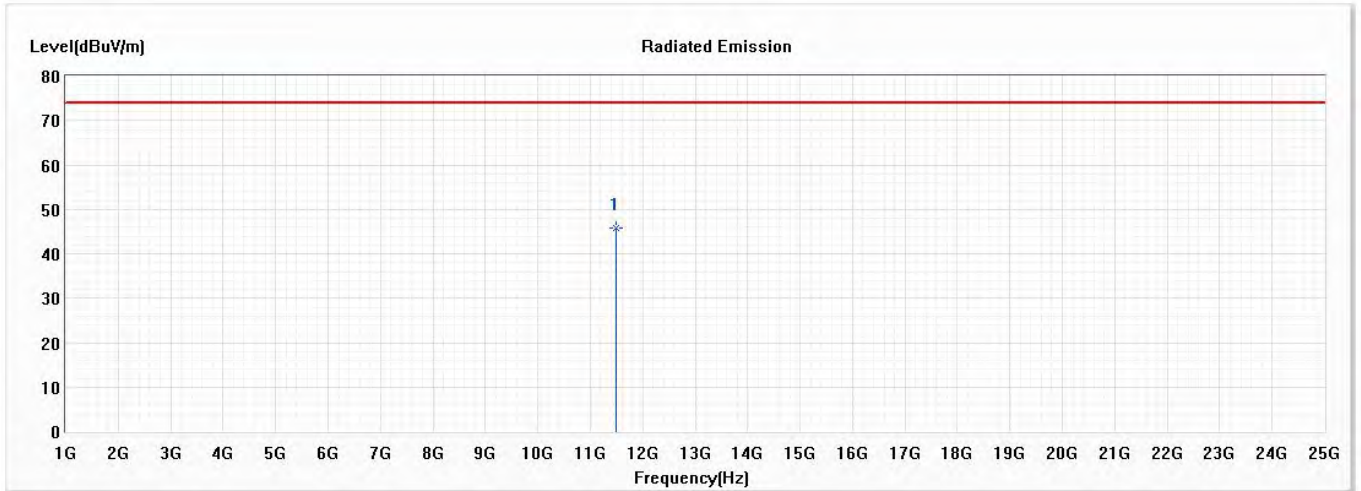


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11490.000 | 45.86 | 74.00 | -28.14 | 54.58 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5785MHz)

Horizontal

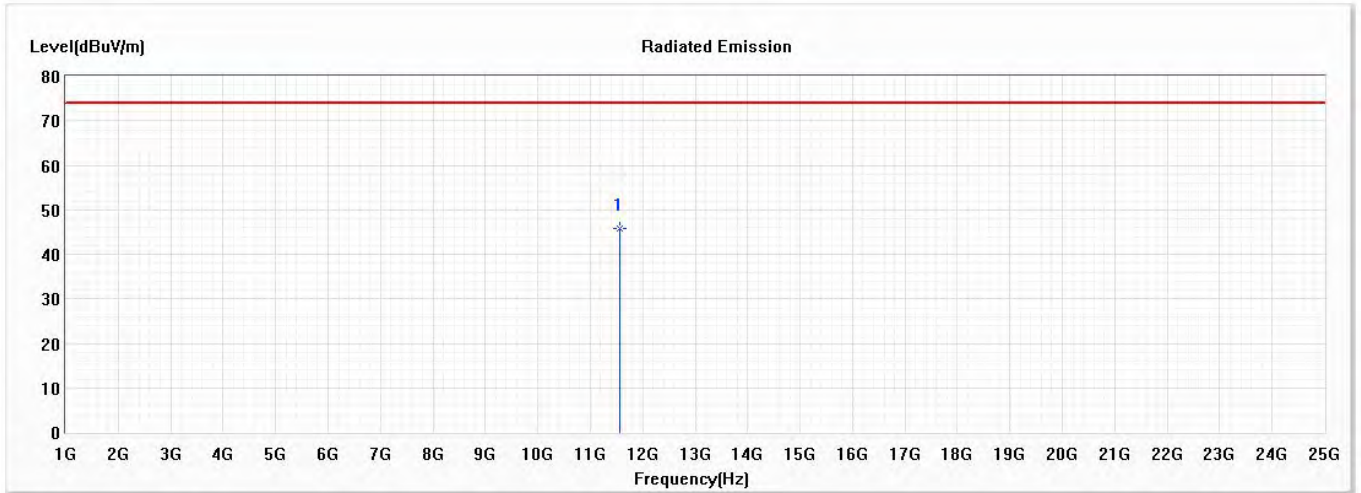


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11570.000 | 45.85 | 74.00 | -28.15 | 54.41 | -8.56 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5785MHz)

Vertical

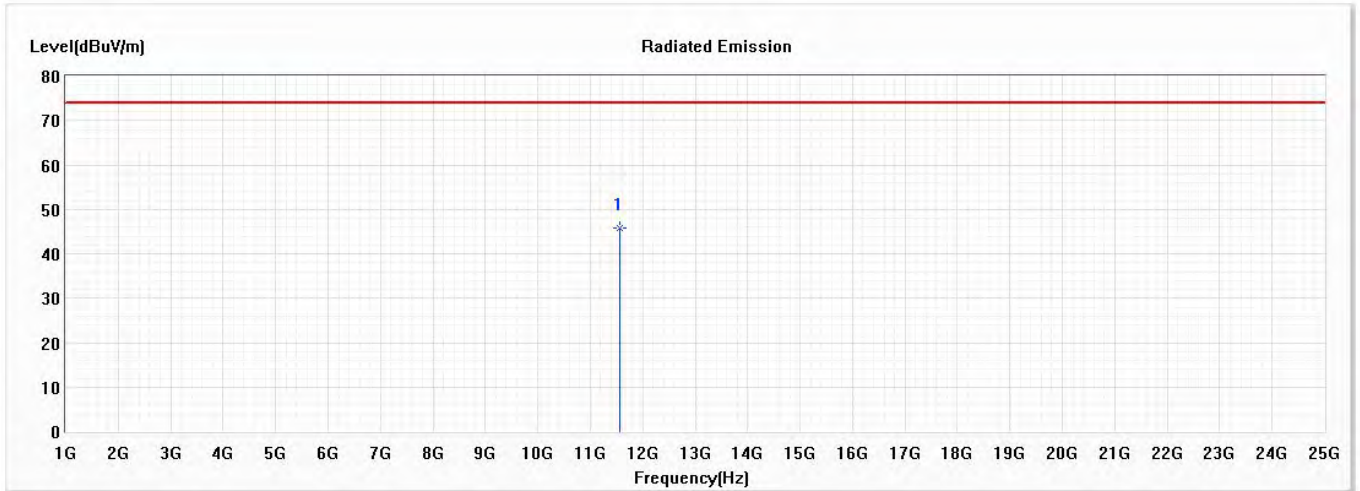


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11570.000 | 45.78 | 74.00 | -28.22 | 54.34 | -8.56 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5825MHz)

Horizontal

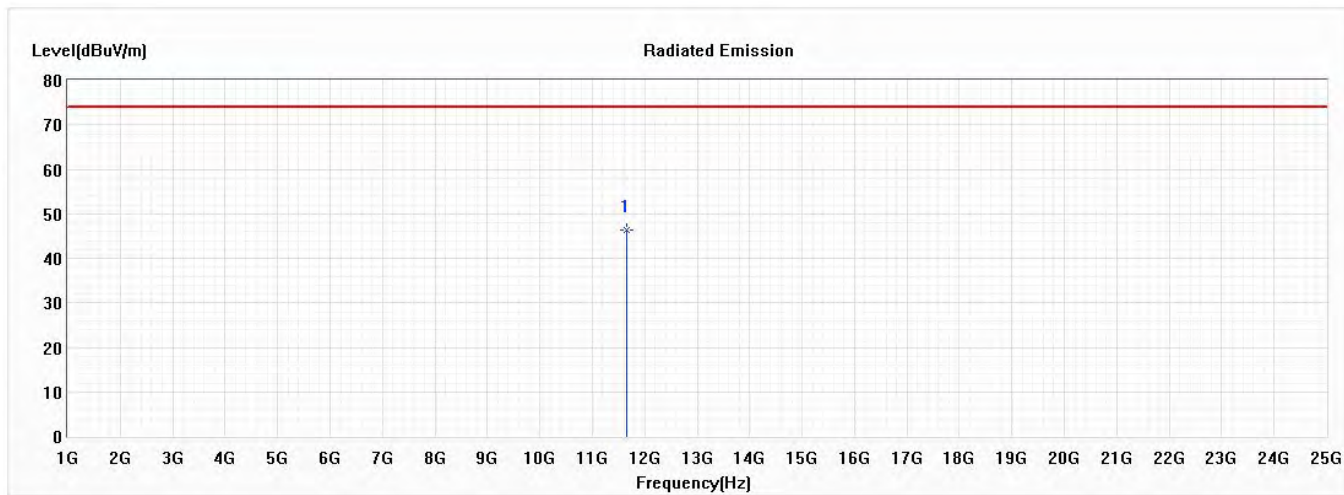


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11650.000 | 46.32 | 74.00 | -27.68 | 54.72 | -8.40 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5825MHz)

Vertical

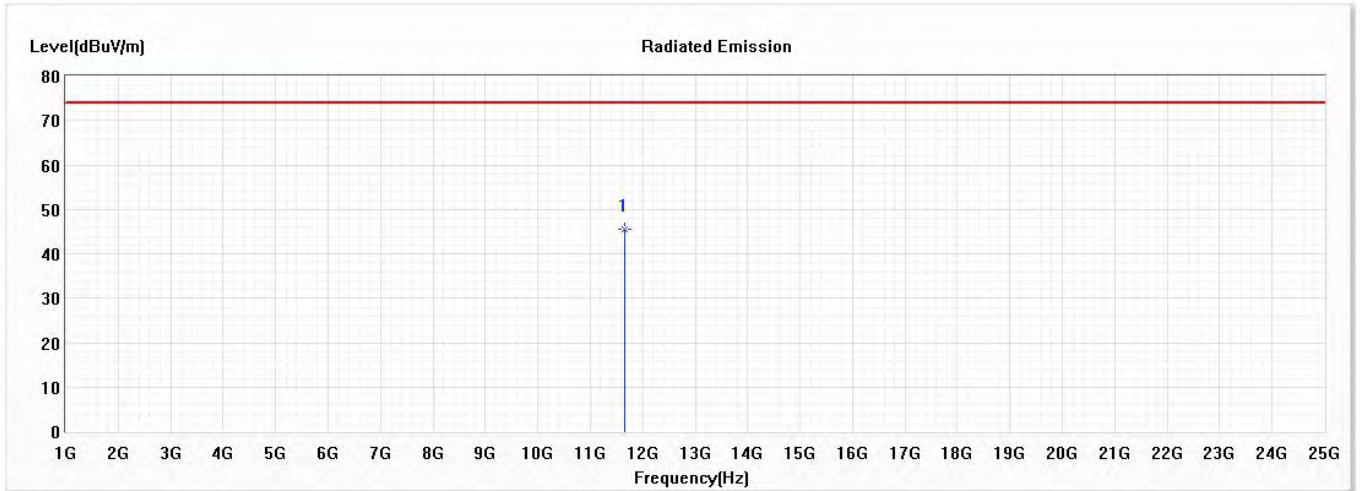


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11650.000 | 45.42 | 74.00 | -28.58 | 53.82 | -8.40 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5180MHz)

Horizontal

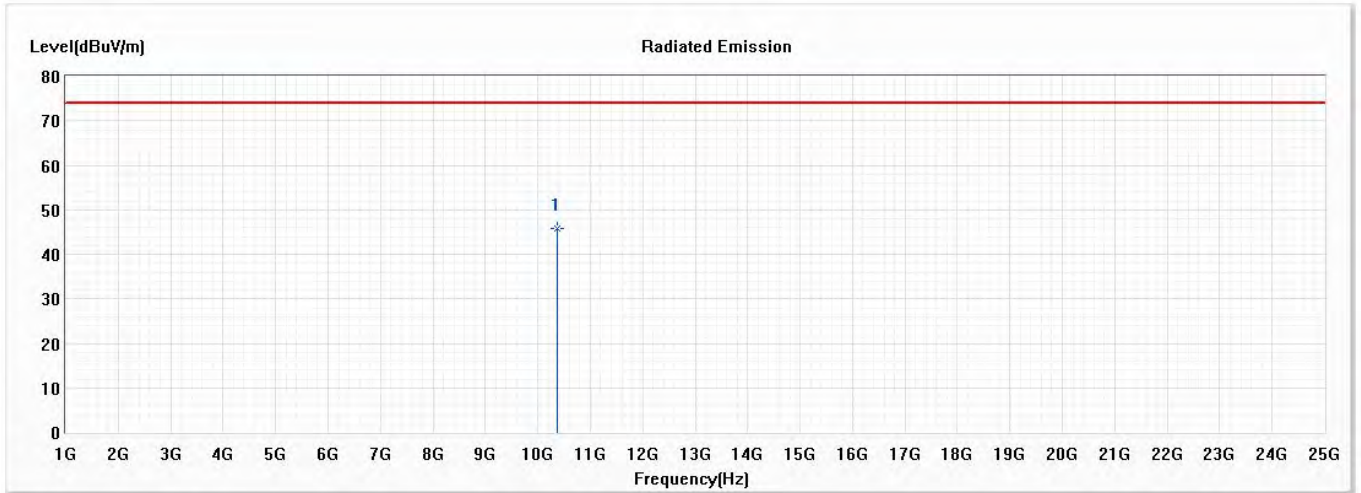


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10360.000 | 45.69 | 74.00 | -28.31 | 55.91 | -10.22 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5180MHz)

Vertical

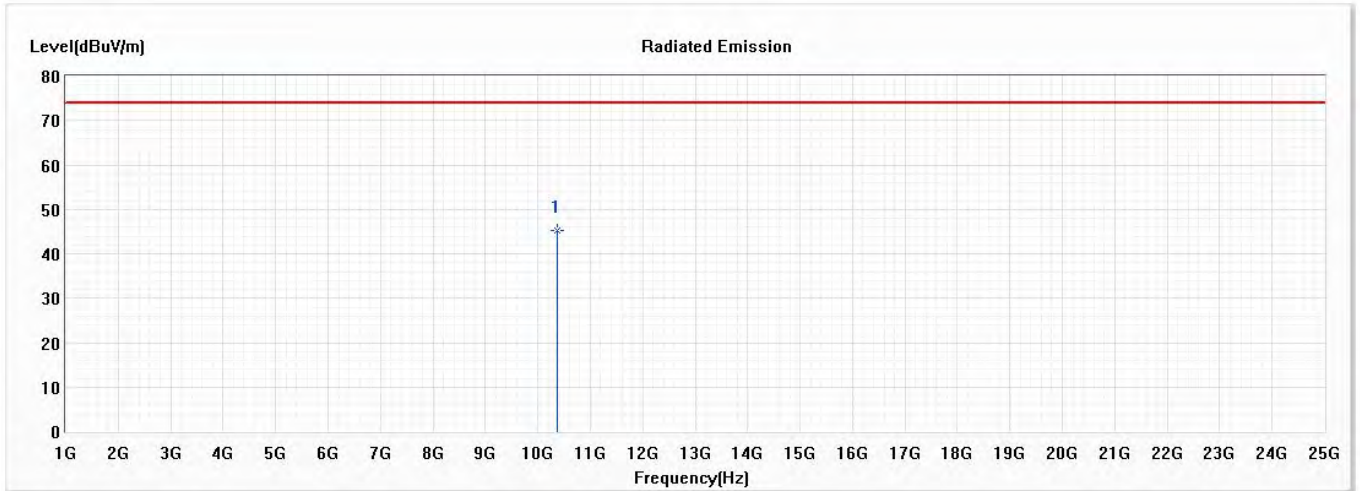


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10360.000 | 45.37 | 74.00 | -28.63 | 55.59 | -10.22 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5220MHz)

Horizontal

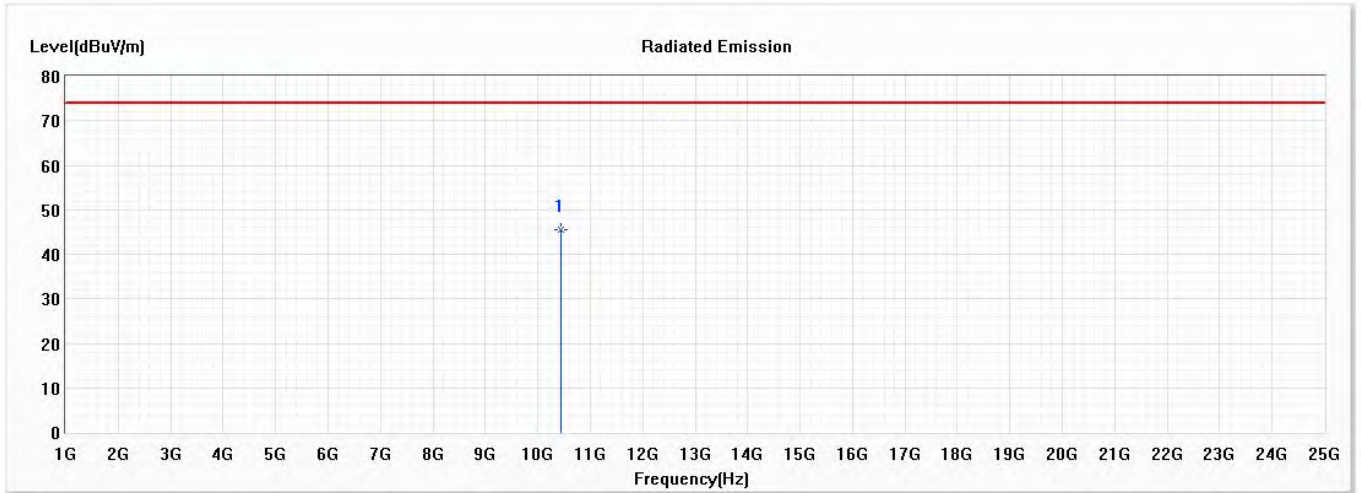


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10440.000 | 45.62 | 74.00 | -28.38 | 55.71 | -10.09 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5220MHz)

Vertical

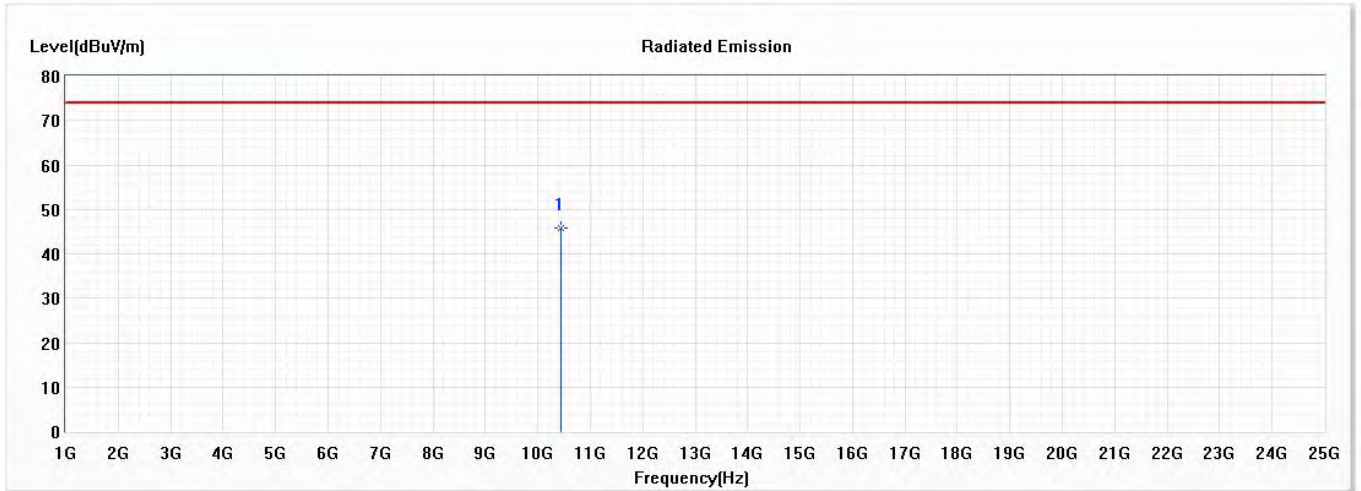


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10440.000 | 45.69 | 74.00 | -28.31 | 55.78 | -10.09 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5240MHz)

Horizontal

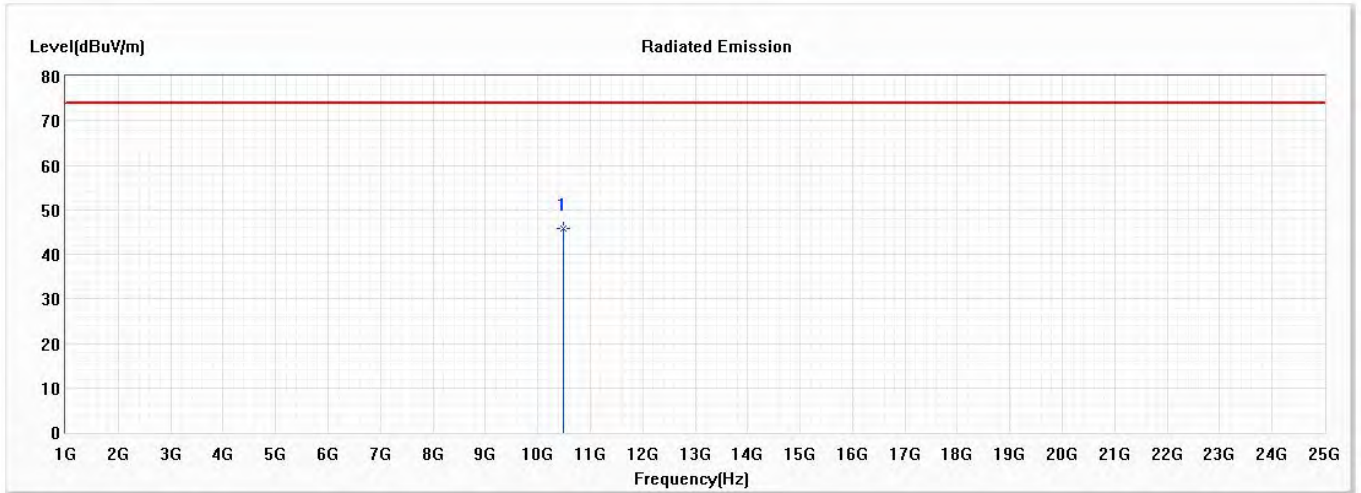


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10480.000 | 45.80 | 74.00 | -28.20 | 55.72 | -9.92 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5240MHz)

Vertical

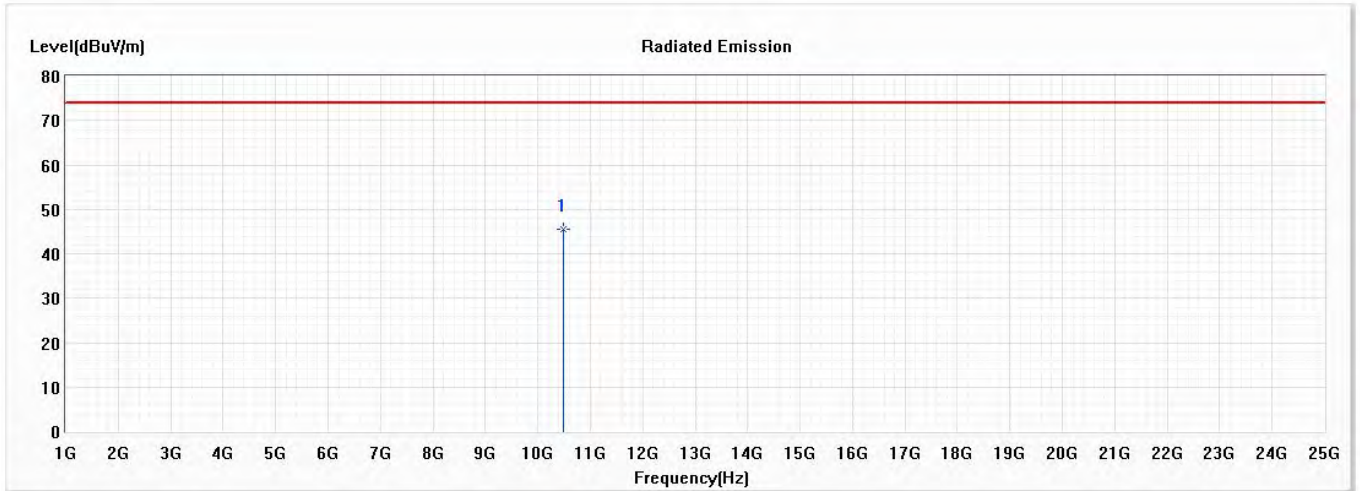


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10480.000 | 45.45 | 74.00 | -28.55 | 55.37 | -9.92 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5260MHz)

Horizontal

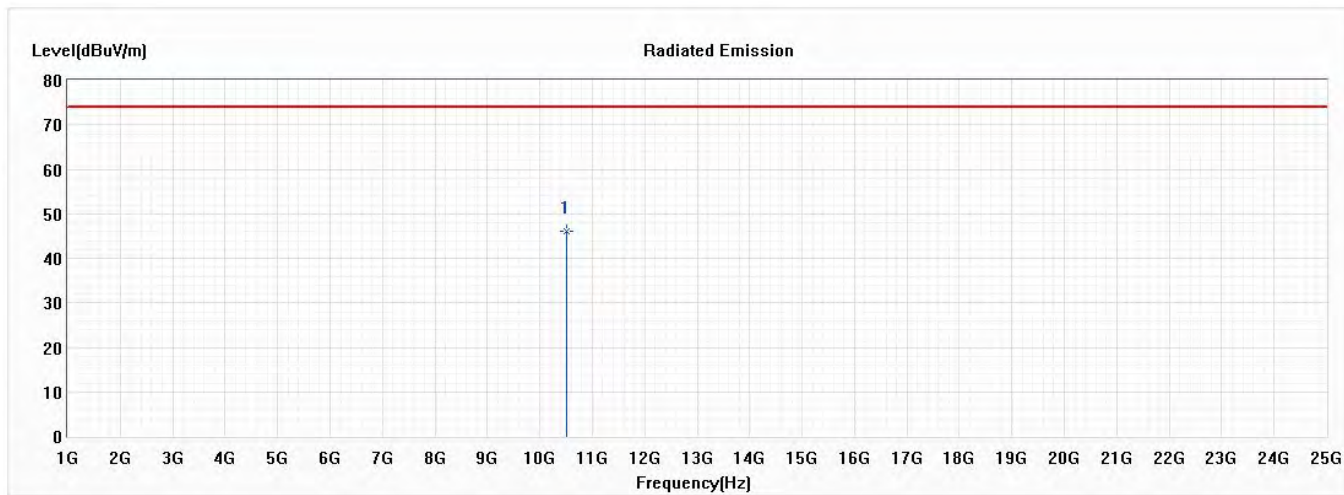


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10520.000 | 46.07 | 74.00 | -27.93 | 55.97 | -9.90 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5260MHz)

Vertical

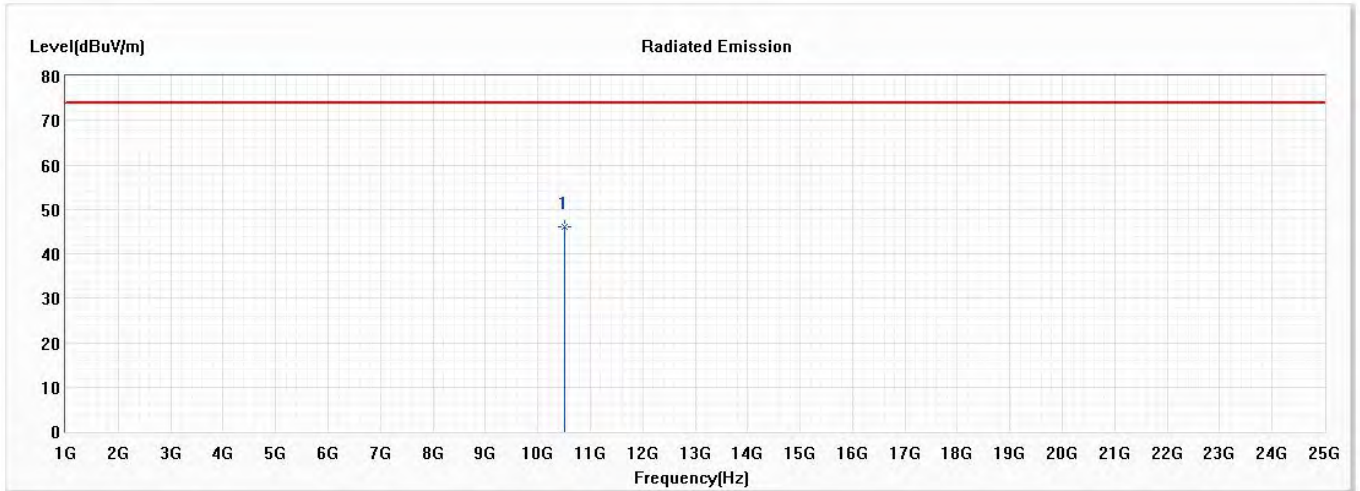


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10520.000 | 46.03 | 74.00 | -27.97 | 55.93 | -9.90 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5300MHz)

Horizontal

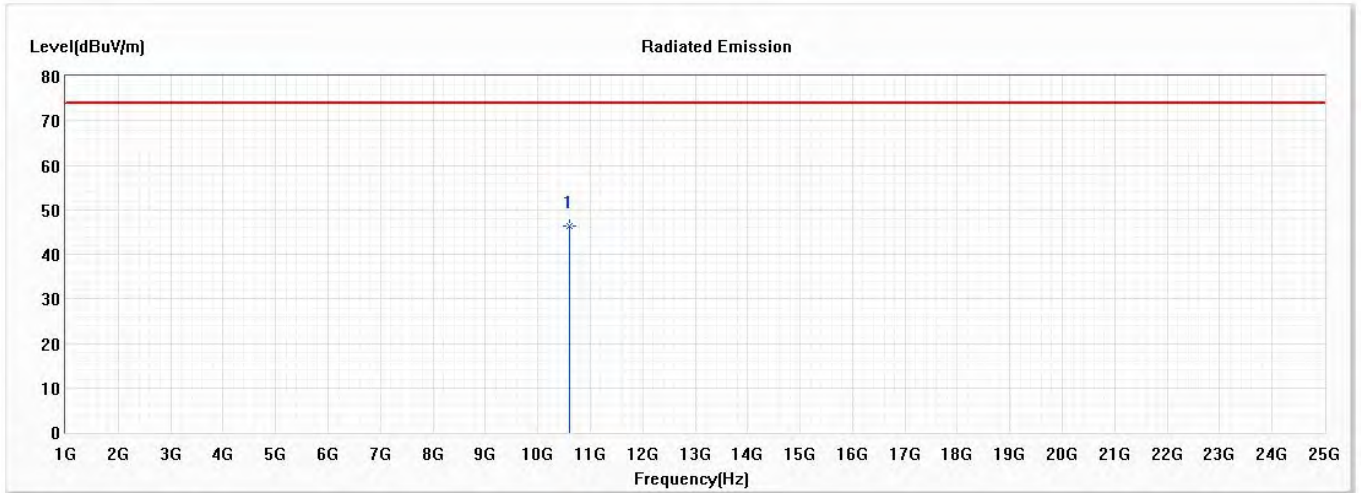


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10600.000 | 46.44 | 74.00 | -27.56 | 56.24 | -9.80 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5300MHz)

Vertical

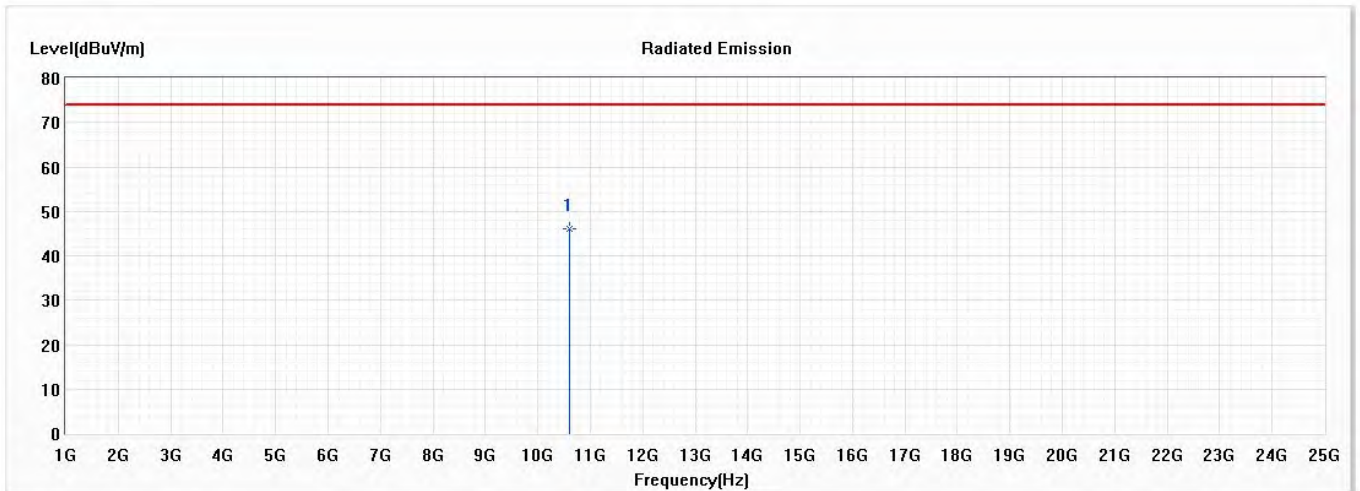


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10600.000 | 46.19 | 74.00 | -27.81 | 55.99 | -9.80 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5320MHz)

Horizontal

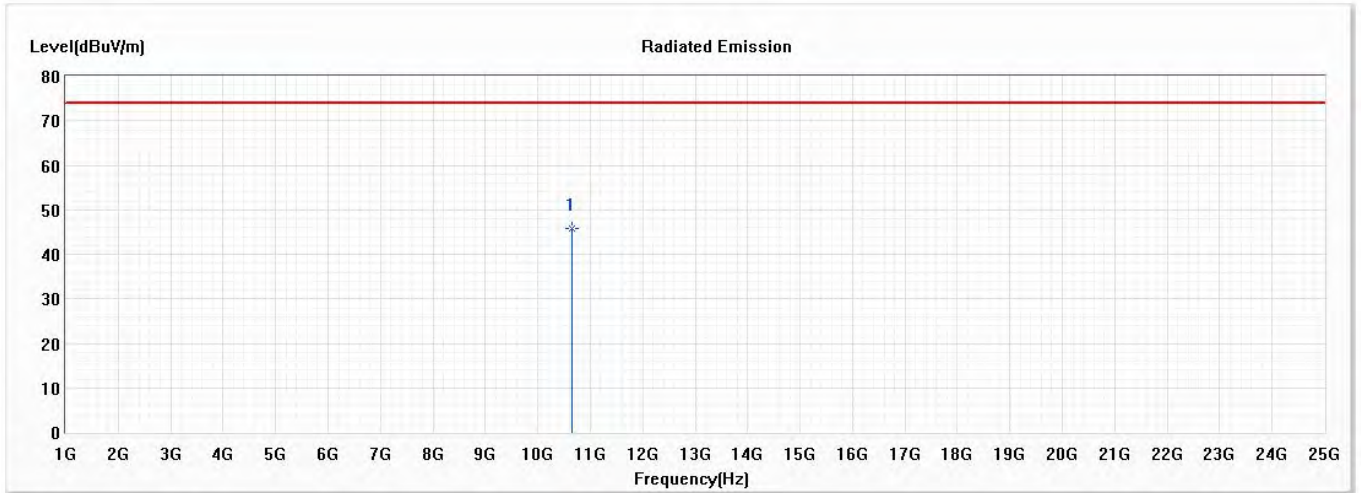


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10640.000 | 45.74 | 74.00 | -28.26 | 55.47 | -9.73 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5320MHz)

Vertical

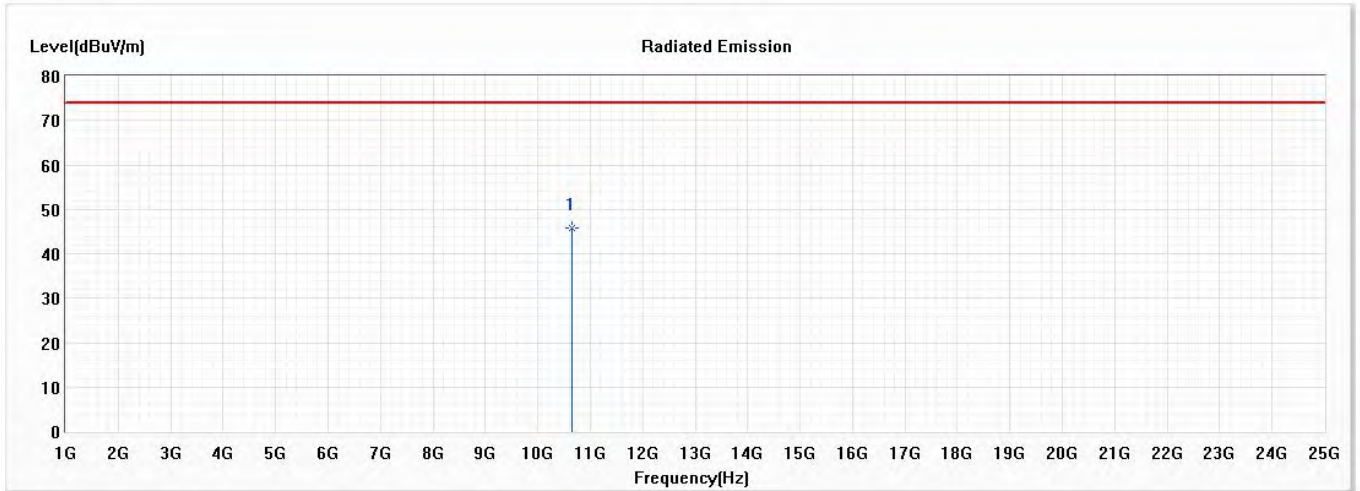


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10640.000 | 45.91 | 74.00 | -28.09 | 55.64 | -9.73 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5500MHz)

Horizontal

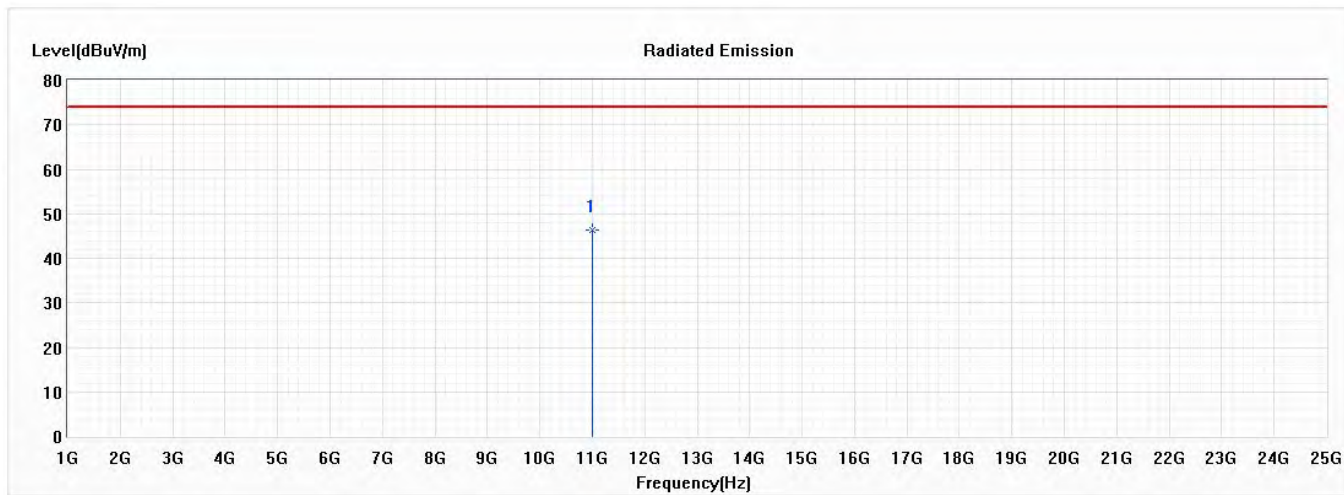


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11000.000 | 46.43 | 74.00 | -27.57 | 55.76 | -9.33 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5500MHz)

Vertical

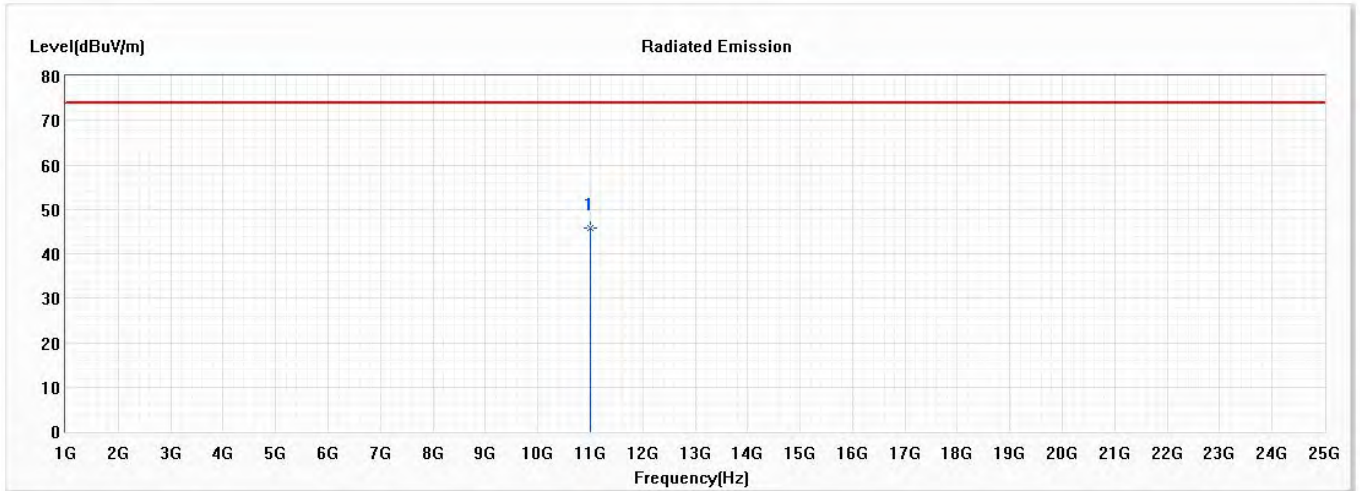


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11000.000 | 45.85 | 74.00 | -28.15 | 55.18 | -9.33 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5580MHz)

Horizontal

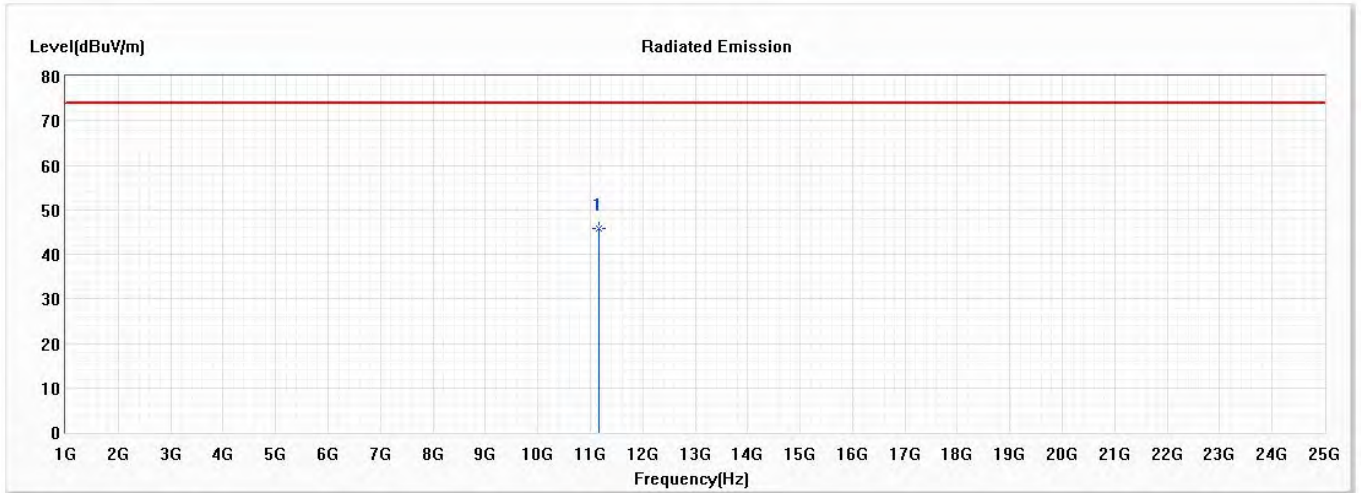


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11160.000 | 45.75 | 74.00 | -28.25 | 54.80 | -9.05 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5580MHz)

Vertical

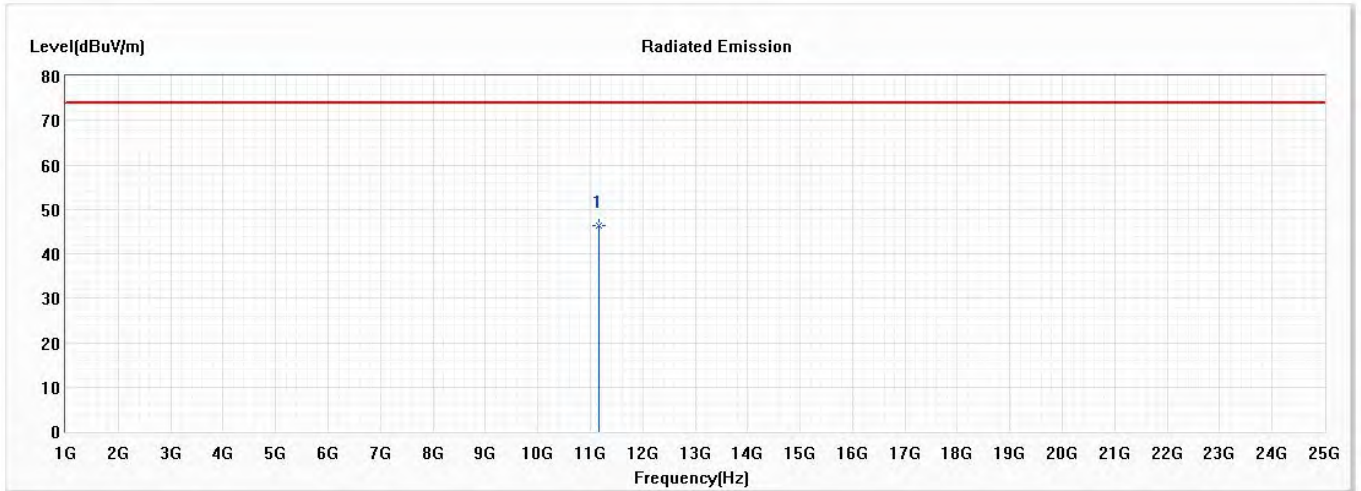


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11160.000 | 46.30 | 74.00 | -27.70 | 55.35 | -9.05 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5700MHz)

Horizontal

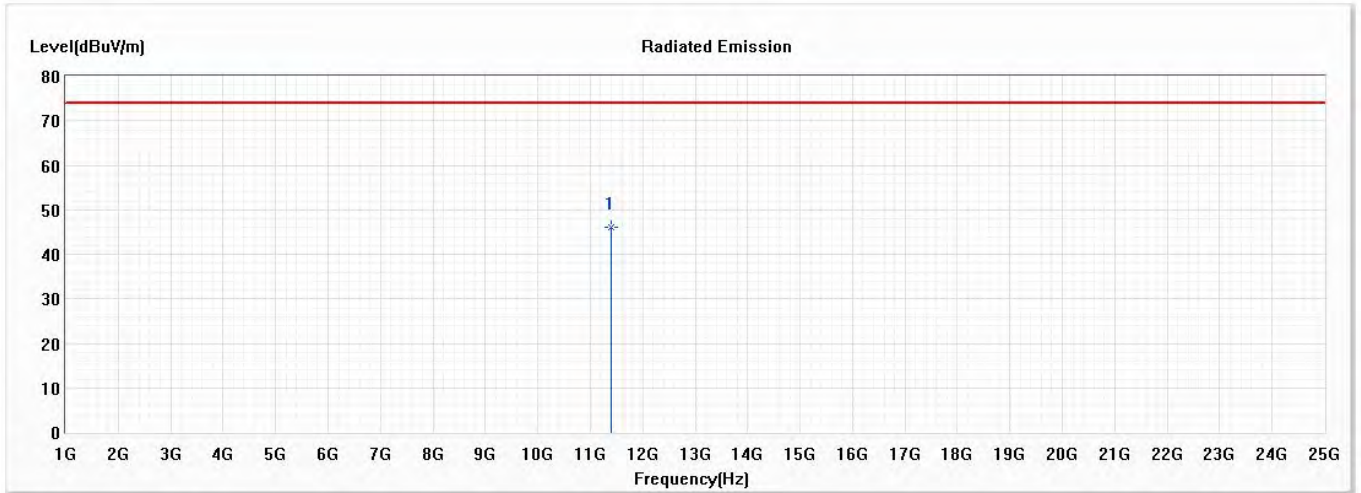


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11400.000 | 46.09 | 74.00 | -27.91 | 54.92 | -8.83 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5700MHz)

Vertical

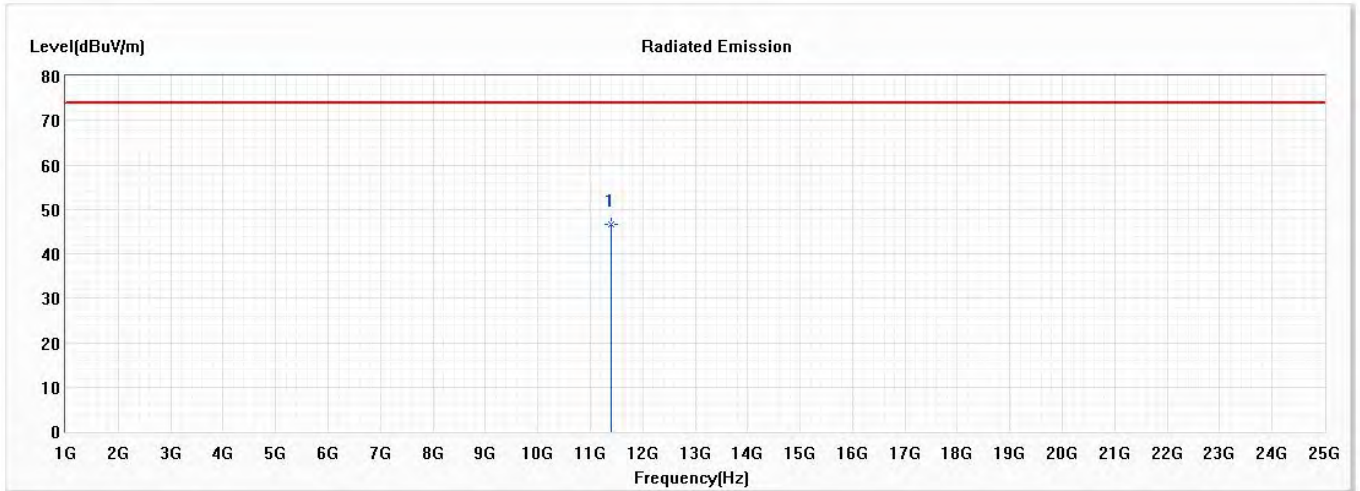


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11400.000 | 46.51 | 74.00 | -27.49 | 55.34 | -8.83 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5720MHz)

Horizontal

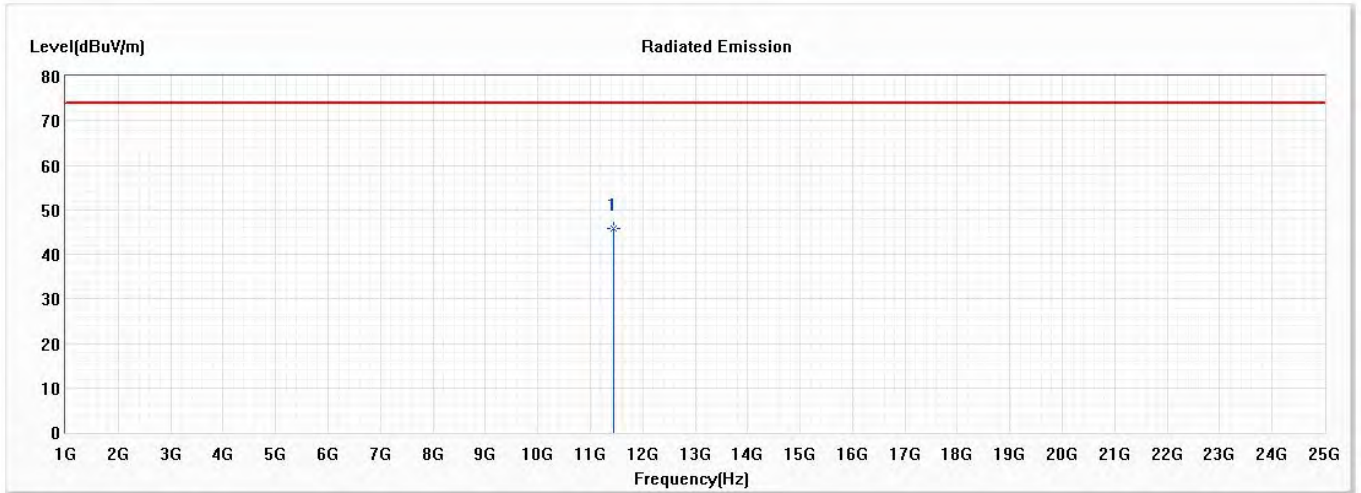


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11440.000 | 45.89 | 74.00 | -28.11 | 54.71 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5720MHz)

Vertical

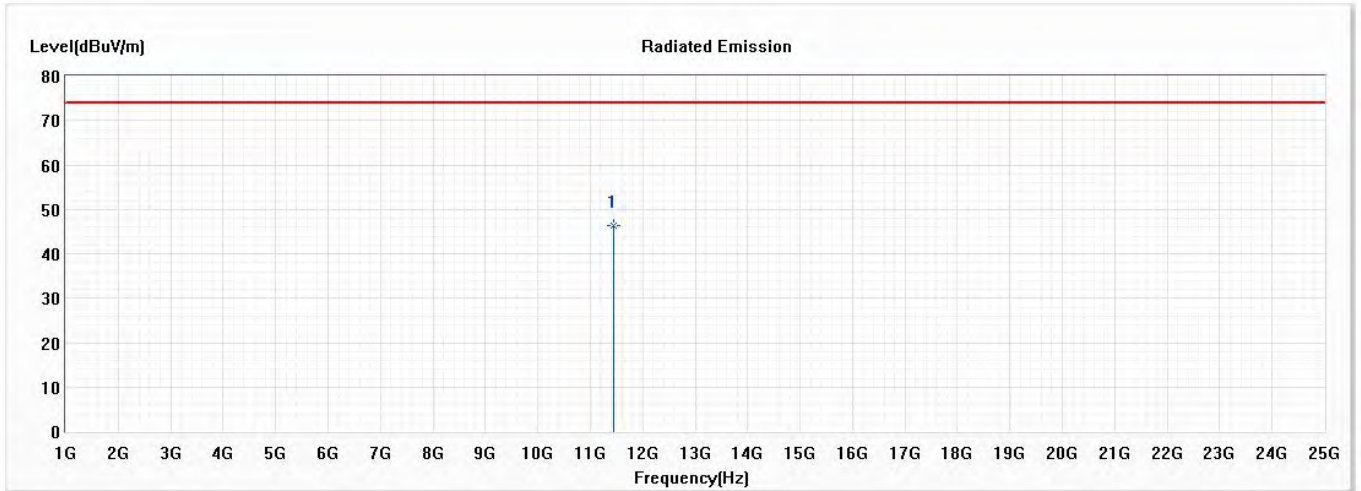


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11440.000 | 46.28 | 74.00 | -27.72 | 55.10 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5745MHz)

Horizontal

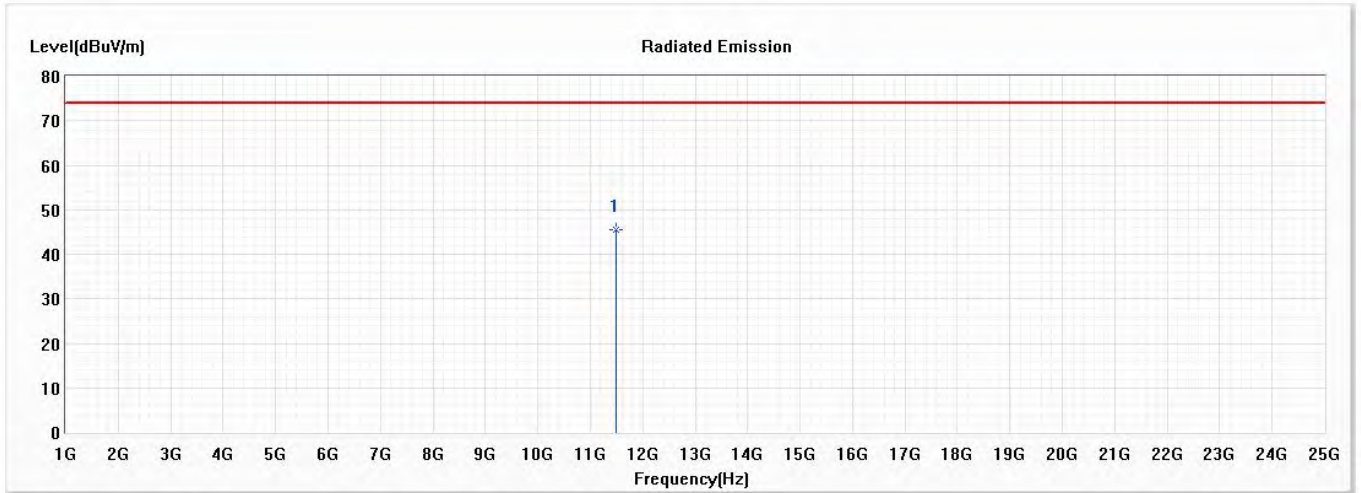


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11490.000 | 45.61 | 74.00 | -28.39 | 54.33 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5745MHz)

Vertical

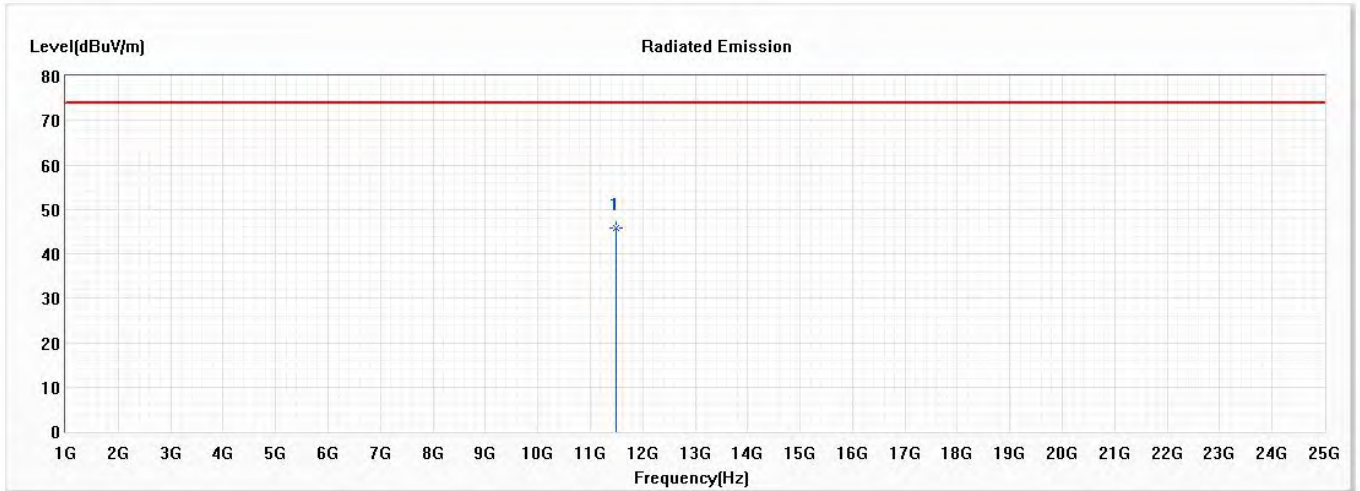


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11490.000 | 45.90 | 74.00 | -28.10 | 54.62 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5785MHz)

Horizontal

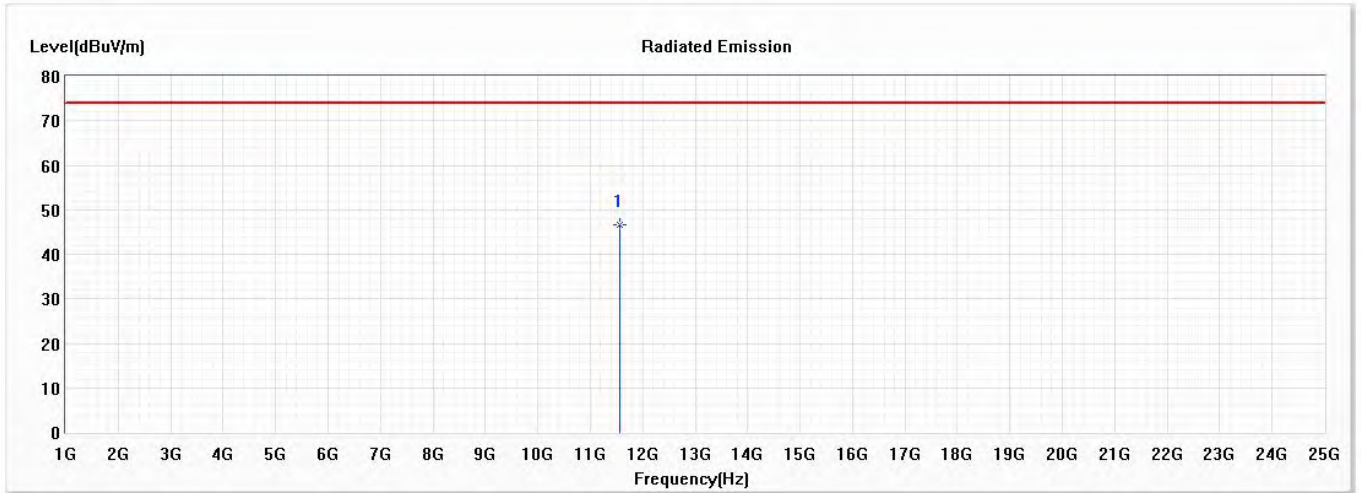


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11570.000 | 46.62 | 74.00 | -27.38 | 55.18 | -8.56 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5785MHz)

Vertical

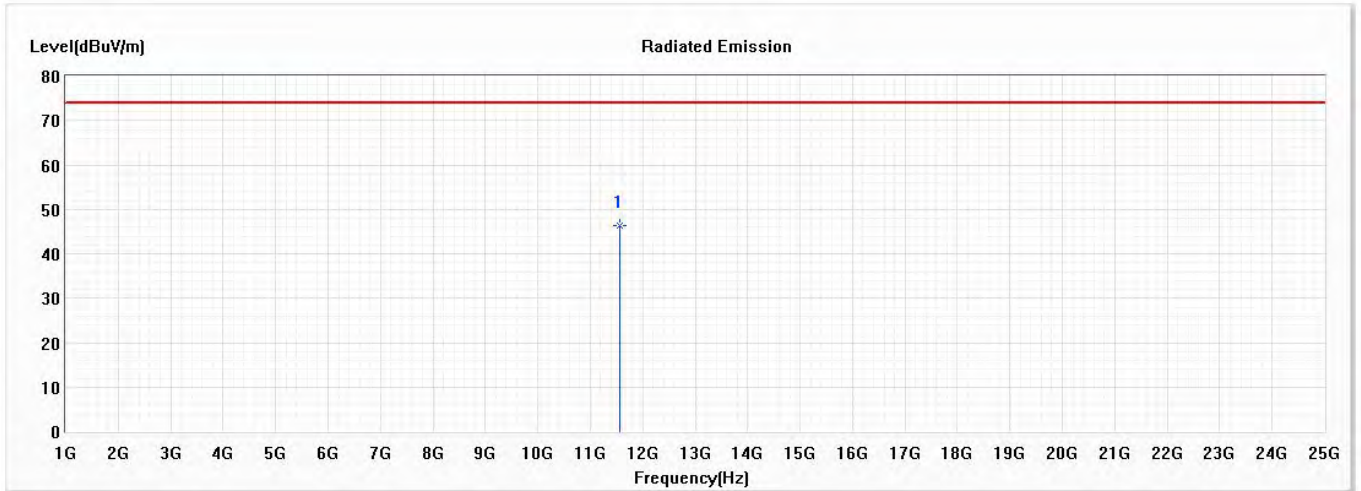


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11570.000 | 46.21 | 74.00 | -27.79 | 54.77 | -8.56 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5825MHz)

Horizontal

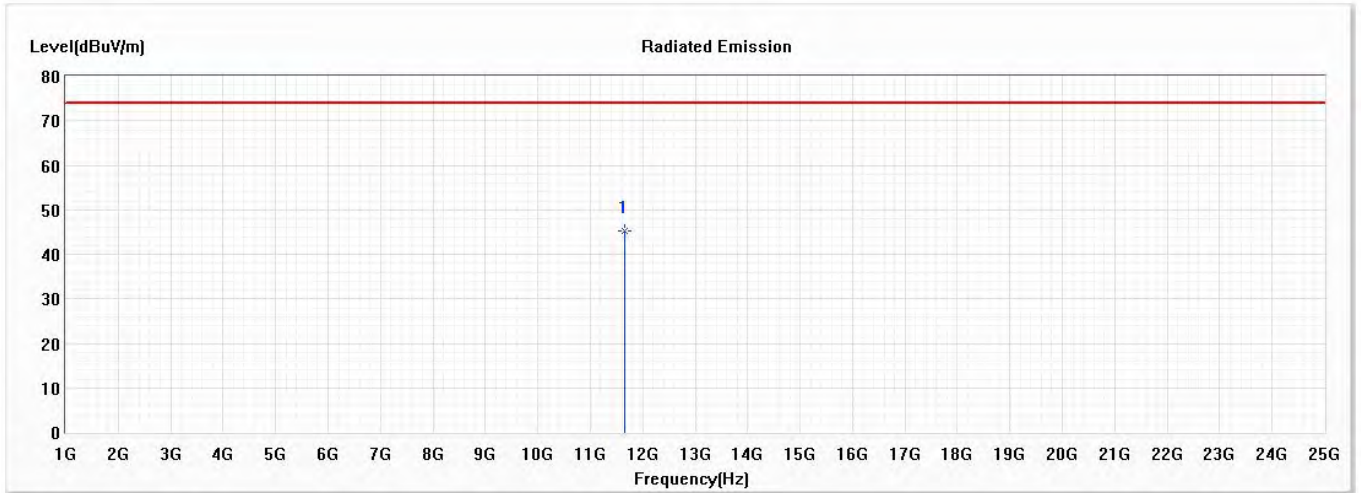


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11650.000 | 45.37 | 74.00 | -28.63 | 53.77 | -8.40 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 6: SISO A Transmit (802.11 ax-20BW_8.6Mbps) (5825MHz)

Vertical

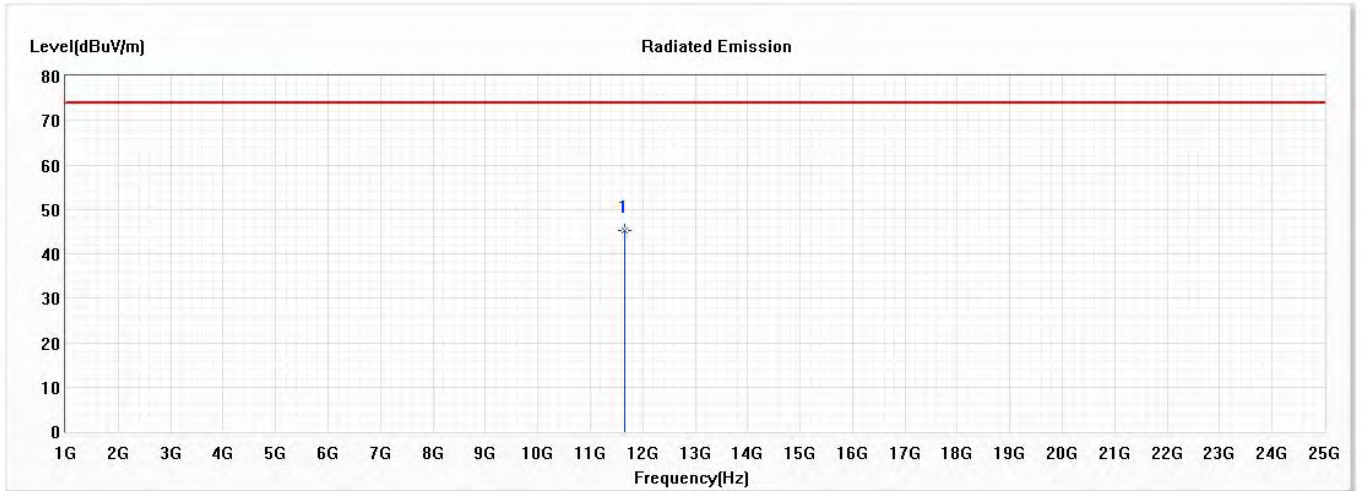


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11650.000 | 45.11 | 74.00 | -28.89 | 53.51 | -8.40 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5190MHz)

Horizontal

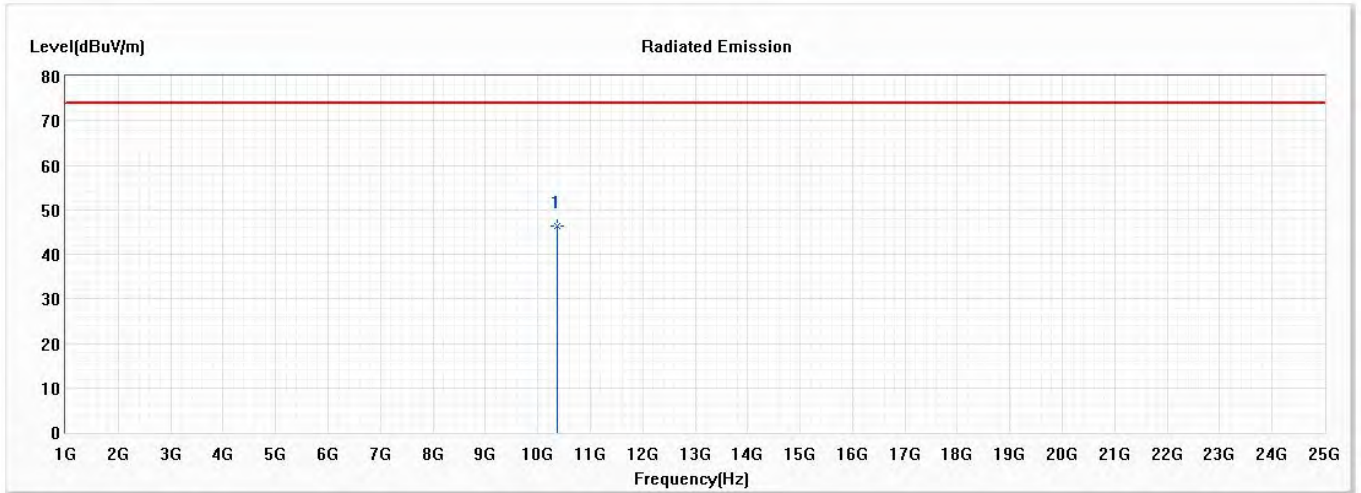


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10380.000 | 46.31 | 74.00 | -27.69 | 56.50 | -10.19 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5190MHz)

Vertical

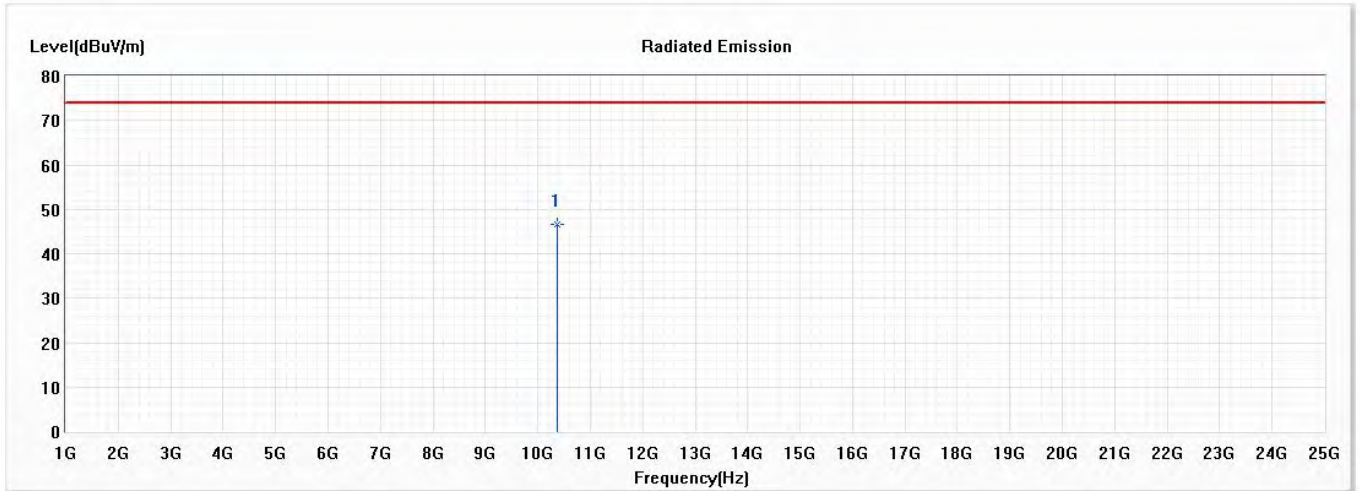


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10380.000 | 46.55 | 74.00 | -27.45 | 56.74 | -10.19 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Horizontal

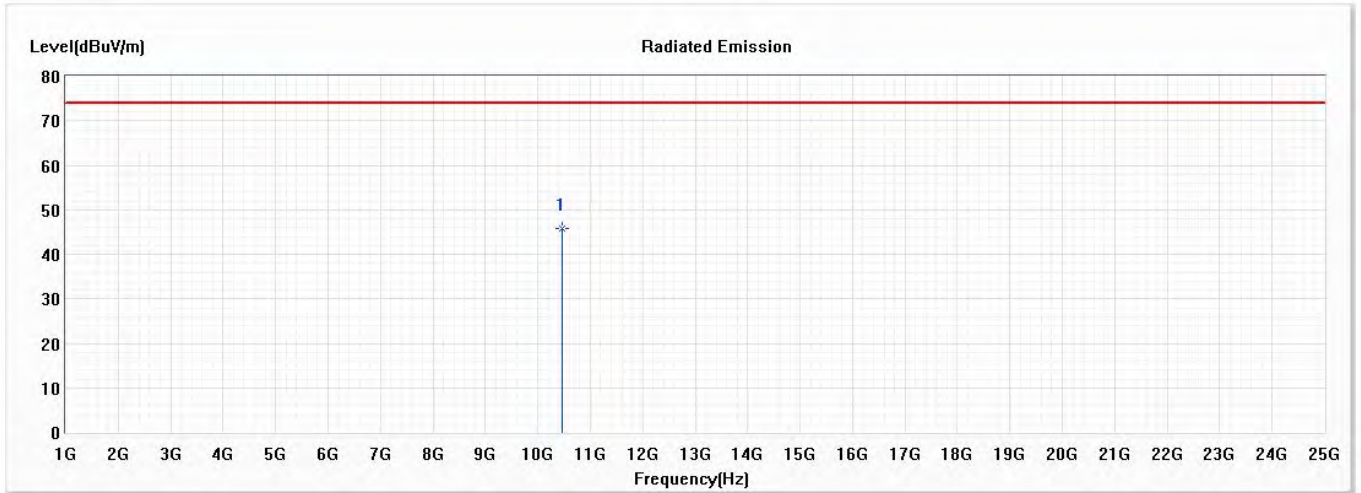


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10460.000 | 45.69 | 74.00 | -28.31 | 55.69 | -10.00 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Vertical

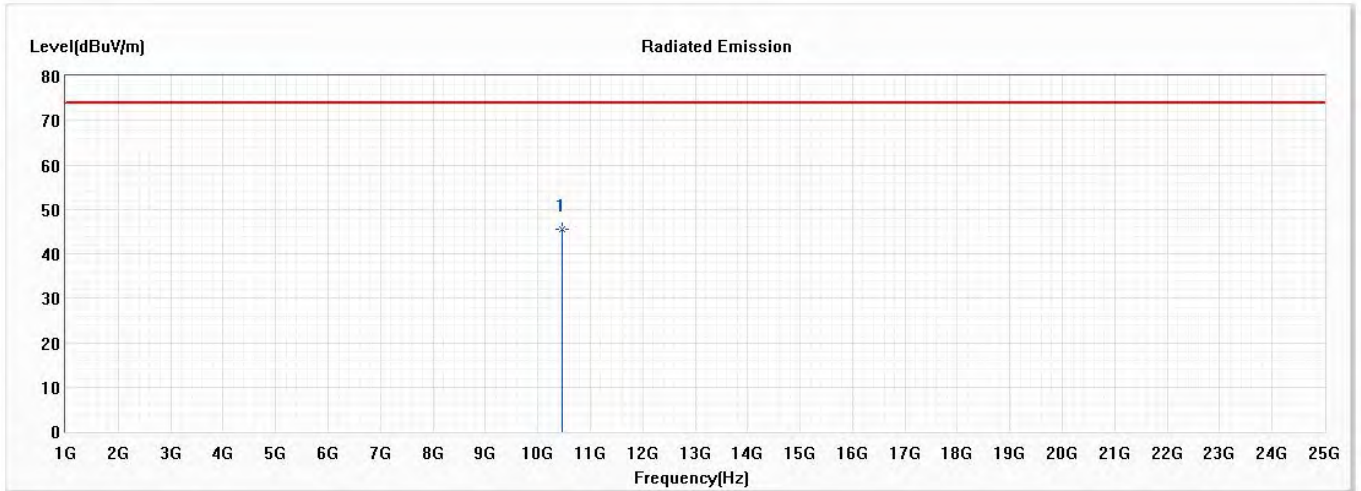


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10460.000 | 45.63 | 74.00 | -28.37 | 55.63 | -10.00 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5270MHz)

Horizontal

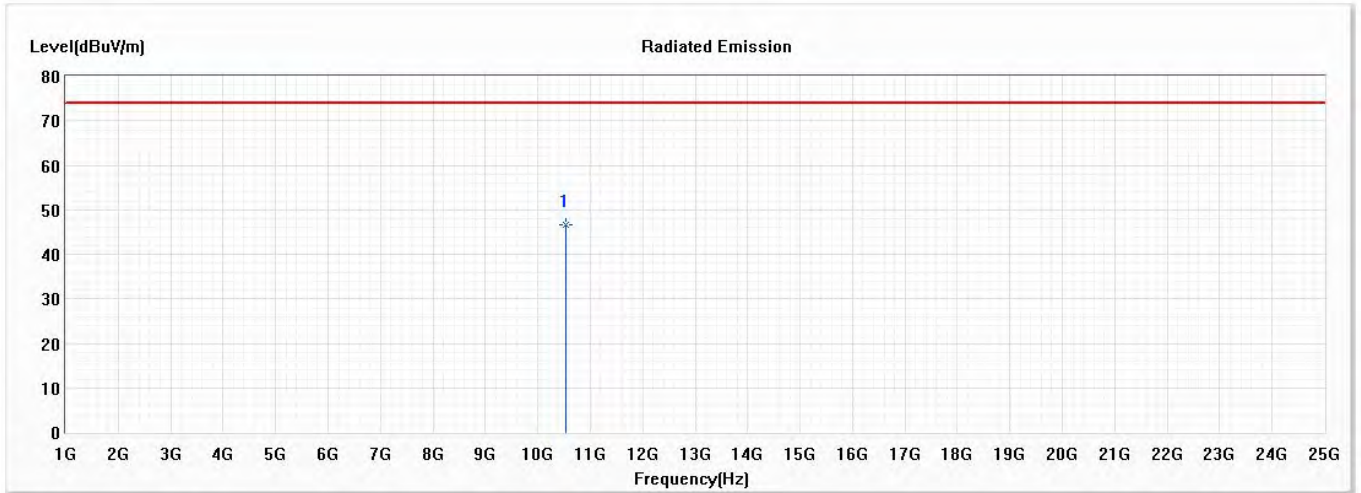


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10540.000 | 46.53 | 74.00 | -27.47 | 56.39 | -9.86 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5270MHz)

Vertical

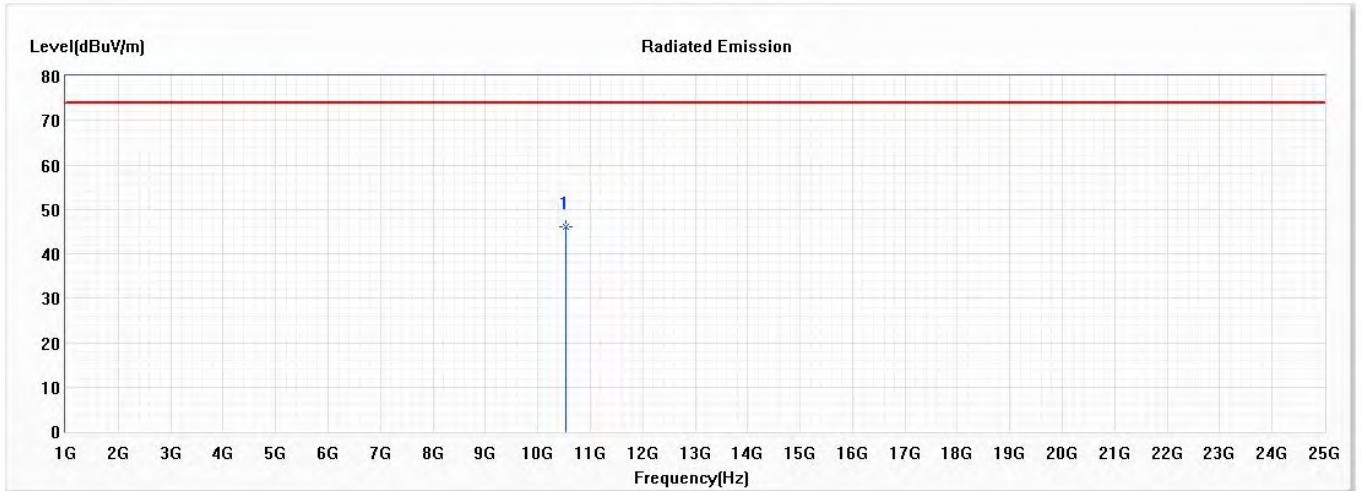


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10540.000 | 46.05 | 74.00 | -27.95 | 55.91 | -9.86 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Horizontal

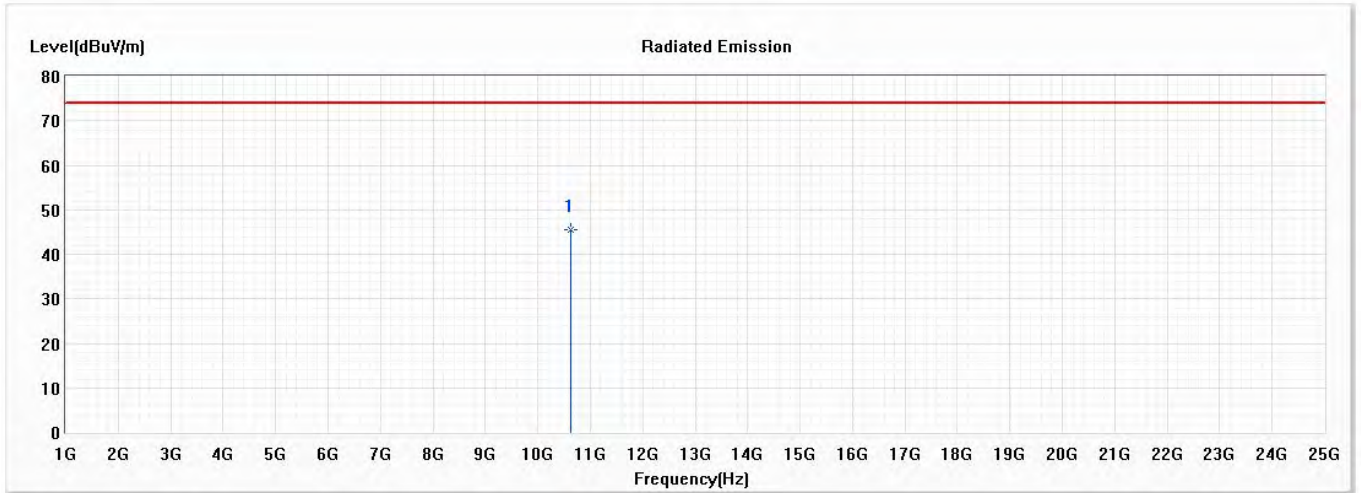


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10620.000 | 45.56 | 74.00 | -28.44 | 55.35 | -9.79 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Vertical

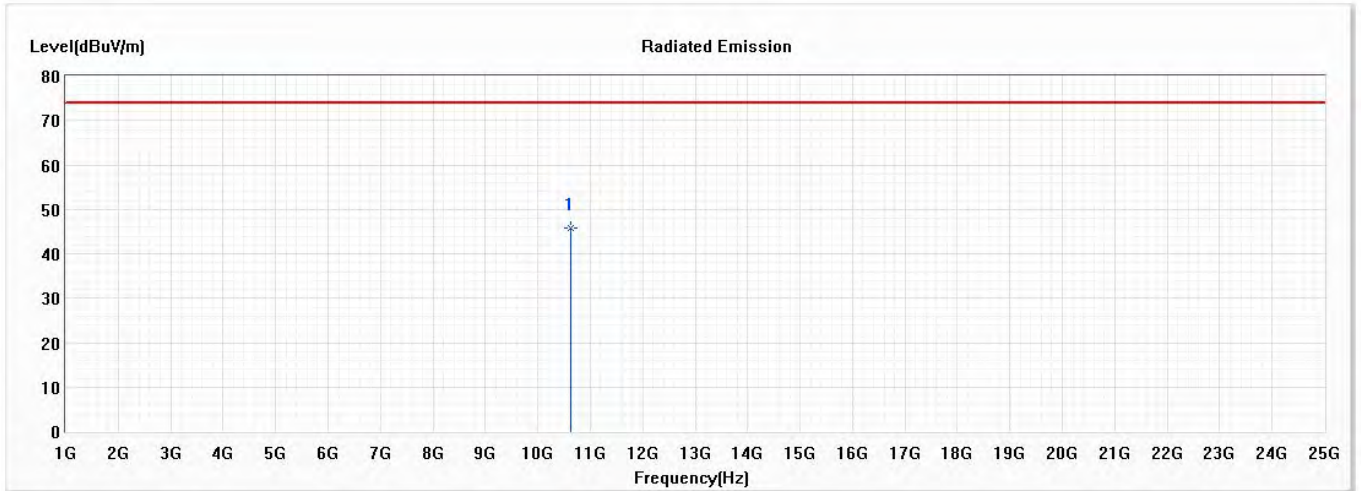


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10620.000 | 45.68 | 74.00 | -28.32 | 55.47 | -9.79 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5510MHz)

Horizontal

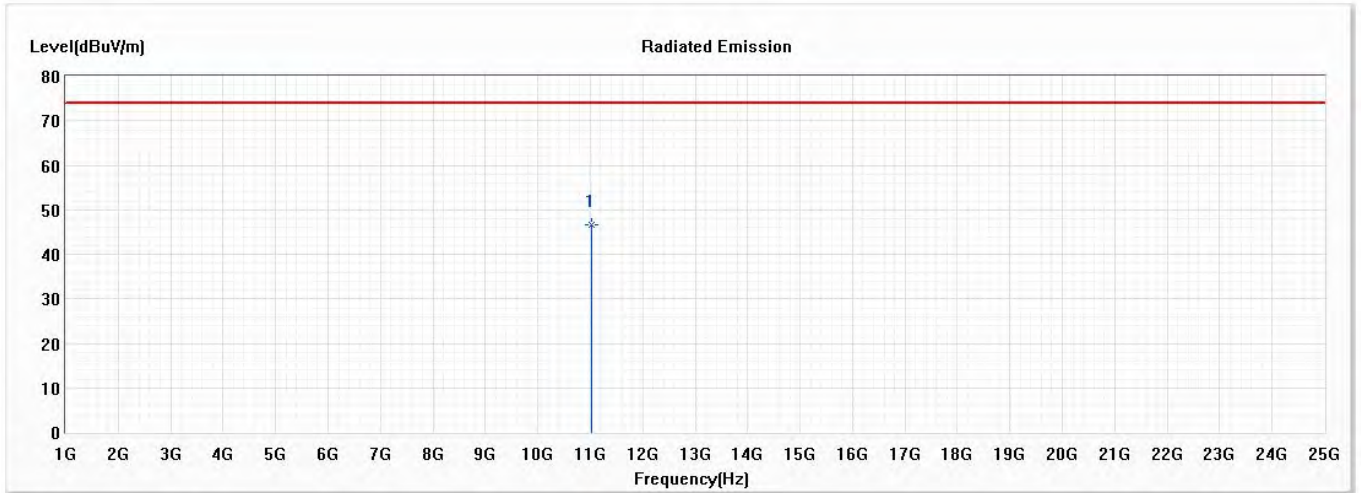


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11020.000 | 46.58 | 74.00 | -27.42 | 55.85 | -9.27 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5510MHz)

Vertical

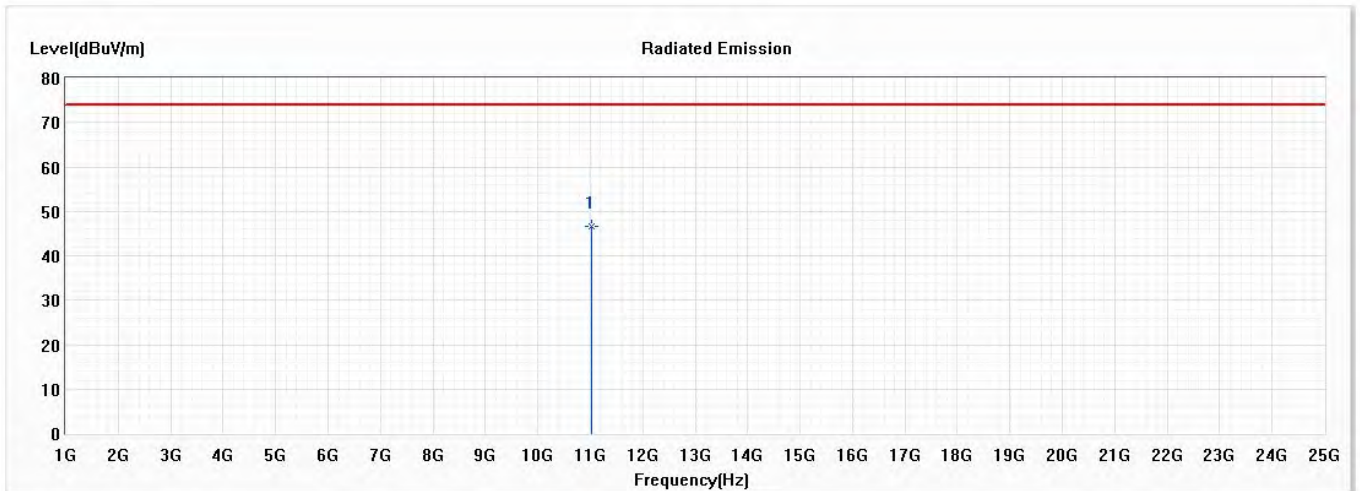


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11020.000 | 46.59 | 74.00 | -27.41 | 55.86 | -9.27 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5550MHz)

Horizontal

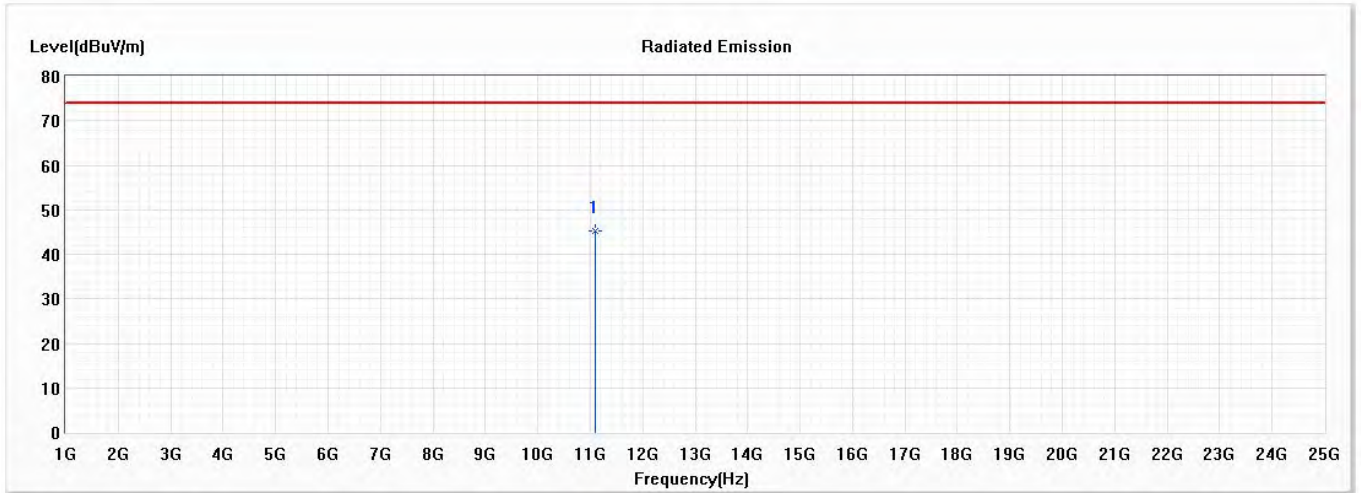


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11100.000 | 45.14 | 74.00 | -28.86 | 54.24 | -9.10 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5550MHz)

Vertical

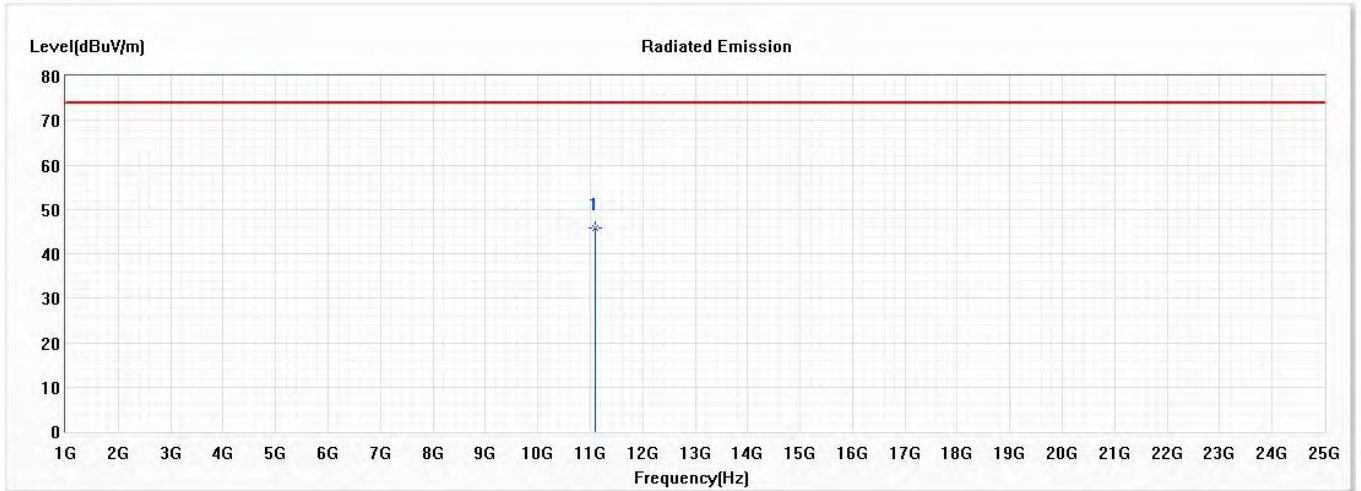


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11100.000 | 45.84 | 74.00 | -28.16 | 54.94 | -9.10 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5670MHz)

Horizontal

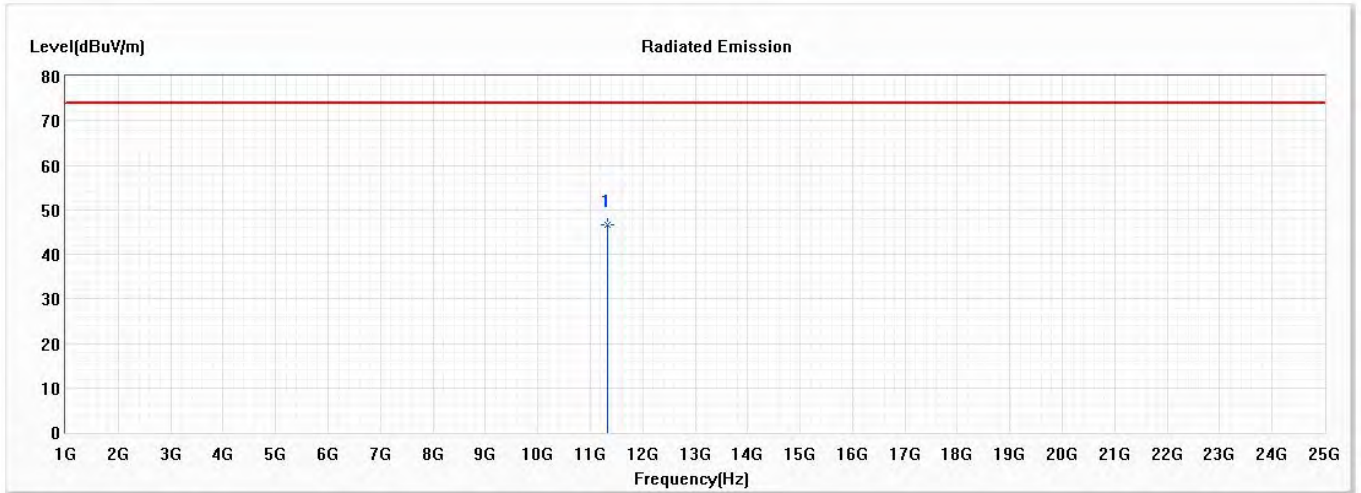


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11340.000 | 46.72 | 74.00 | -27.28 | 55.54 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5670MHz)

Vertical

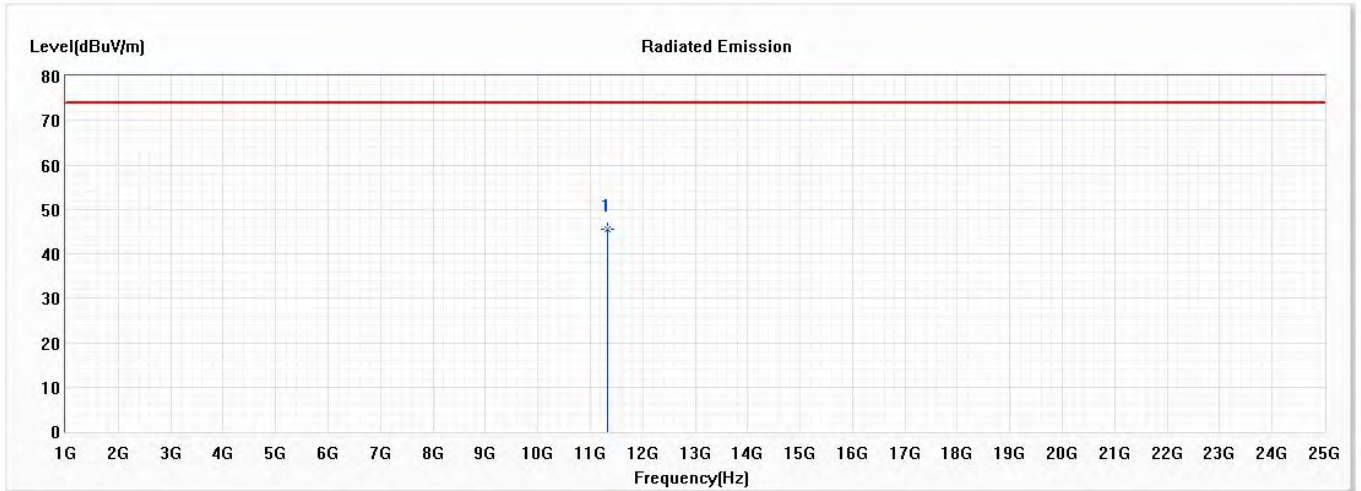


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11340.000 | 45.44 | 74.00 | -28.56 | 54.26 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5710MHz)

Horizontal

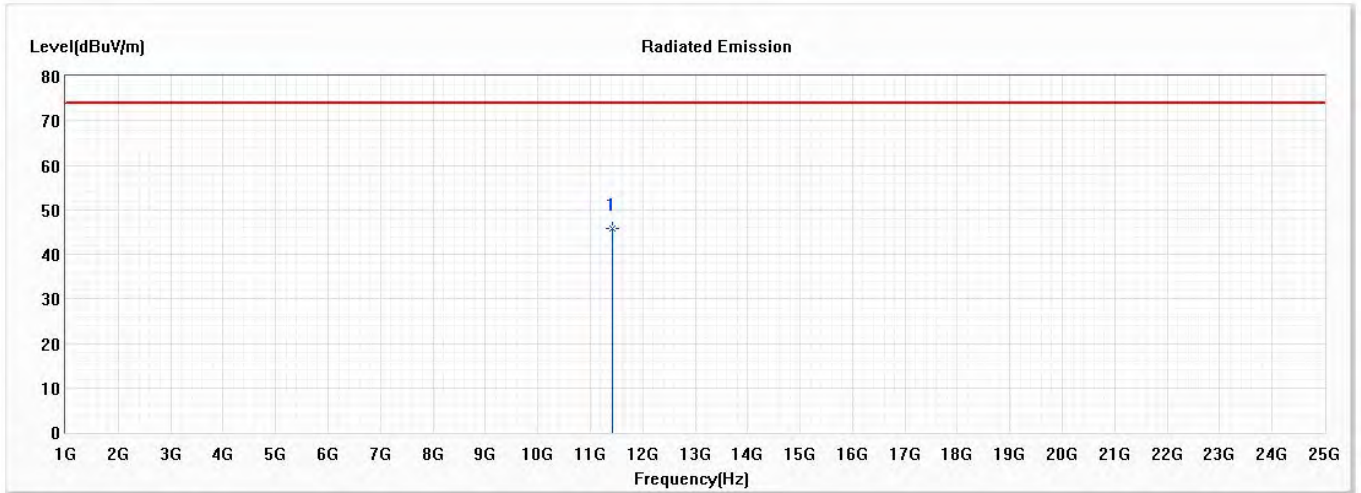


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11420.000 | 45.82 | 74.00 | -28.18 | 54.54 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5710MHz)

Vertical

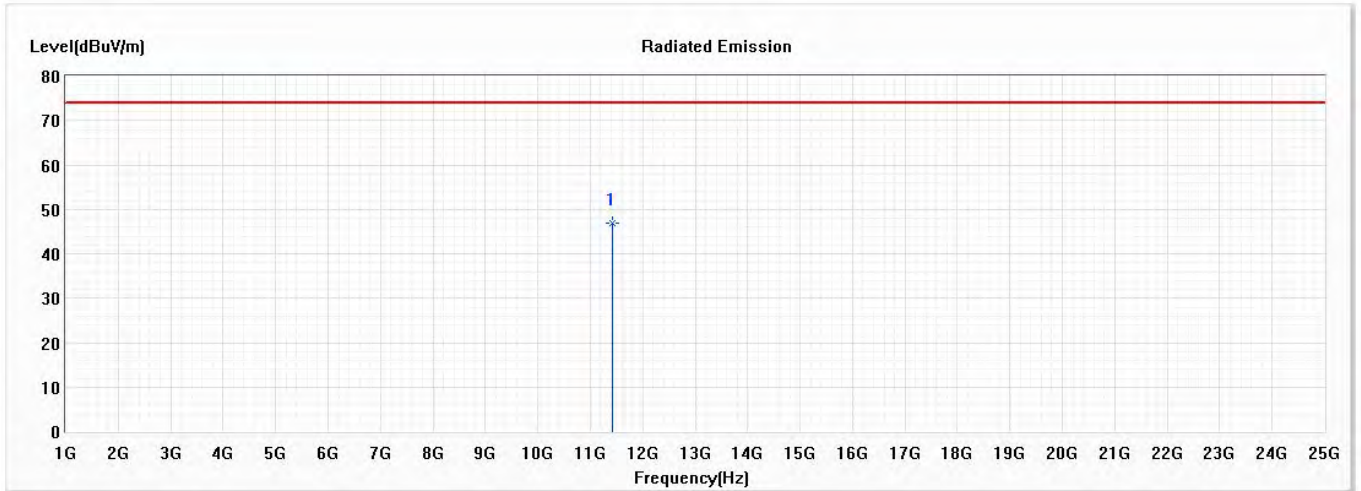


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11420.000 | 46.79 | 74.00 | -27.21 | 55.51 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5755MHz)

Horizontal

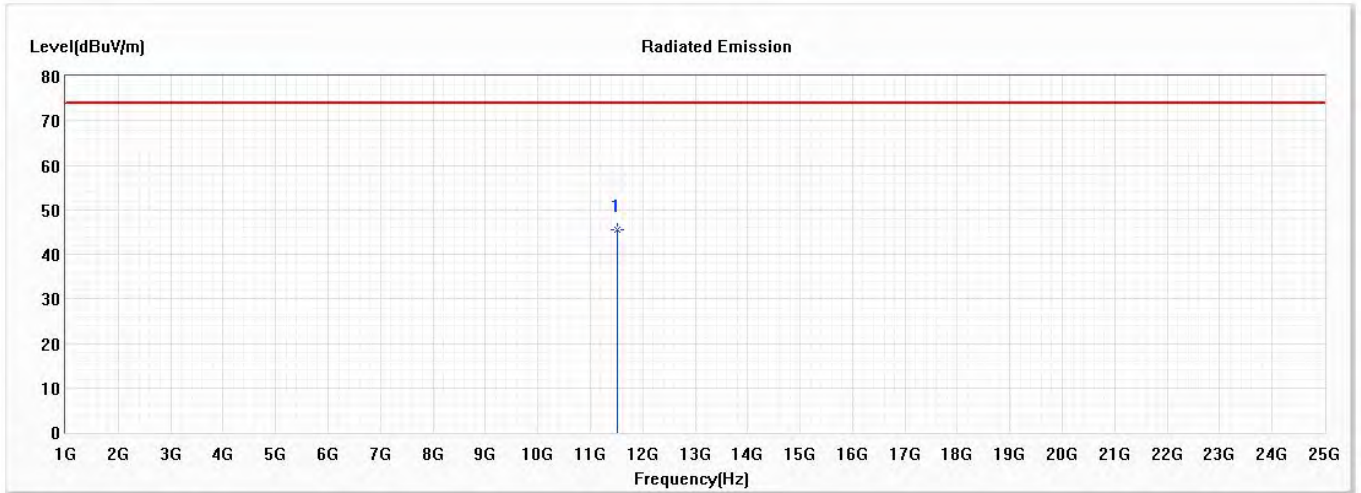


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11510.000 | 45.61 | 74.00 | -28.39 | 54.25 | -8.64 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5755MHz)

Vertical

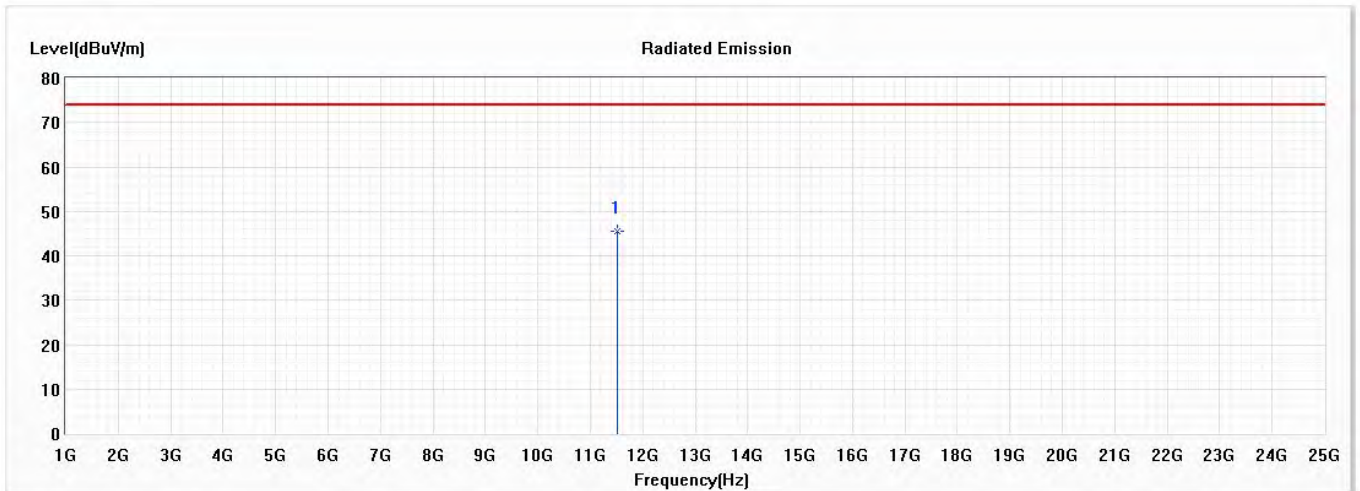


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11510.000 | 45.49 | 74.00 | -28.51 | 54.13 | -8.64 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Horizontal

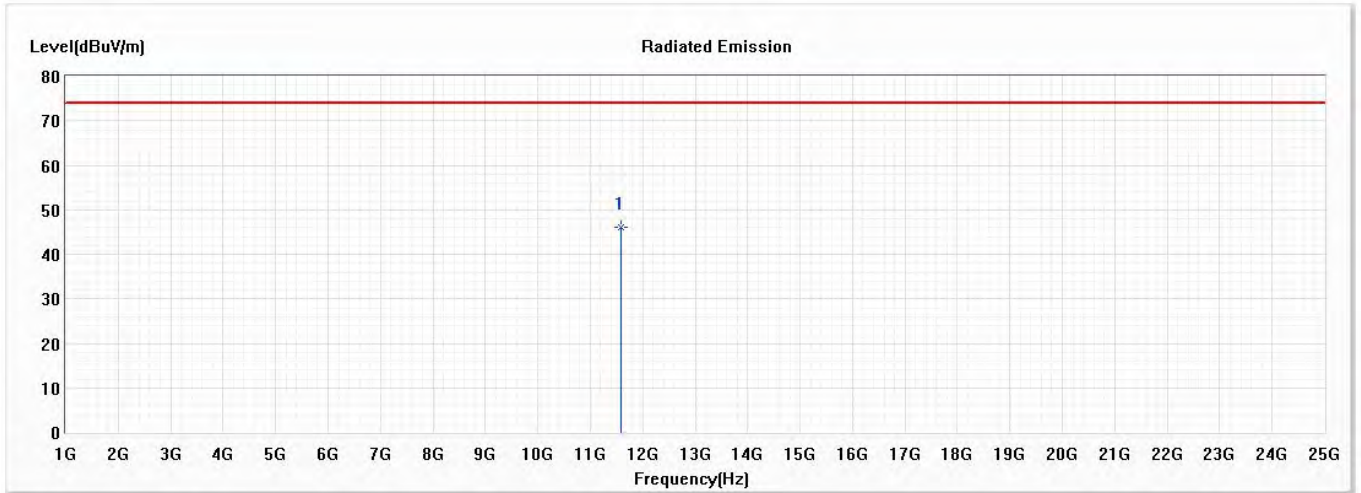


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11590.000 | 46.17 | 74.00 | -27.83 | 54.70 | -8.53 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Vertical

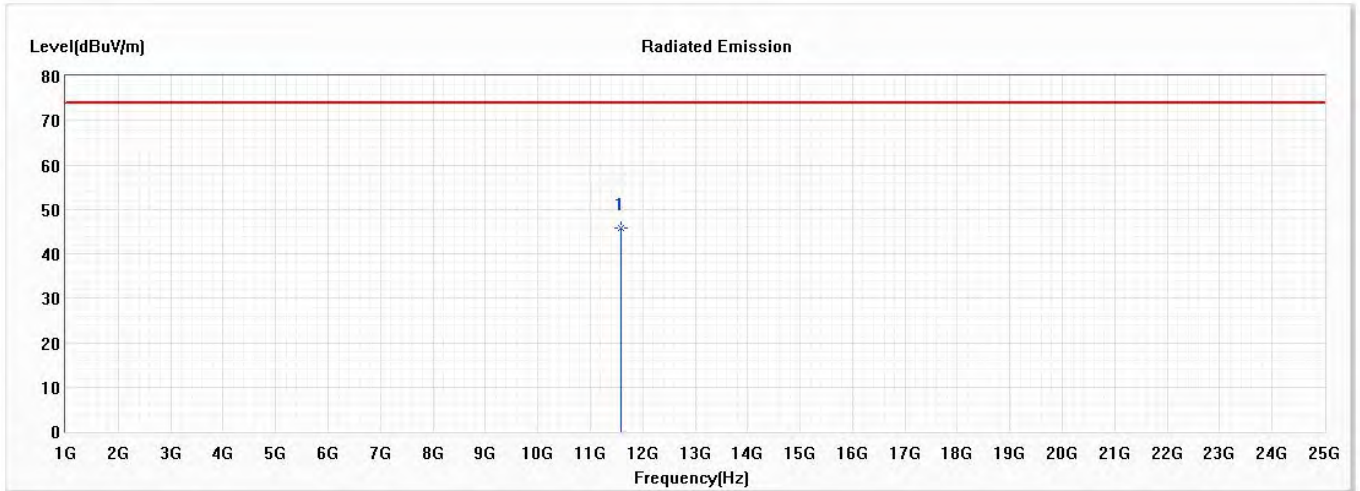


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11590.000 | 45.69 | 74.00 | -28.31 | 54.22 | -8.53 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Horizontal

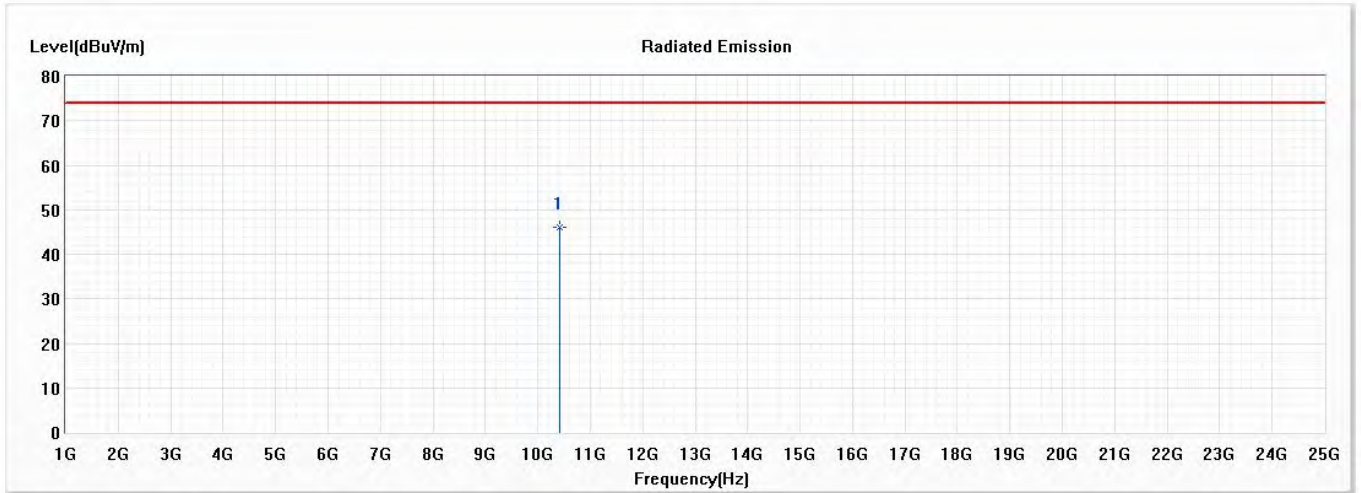


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10420.000 | 45.94 | 74.00 | -28.06 | 56.08 | -10.14 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Vertical

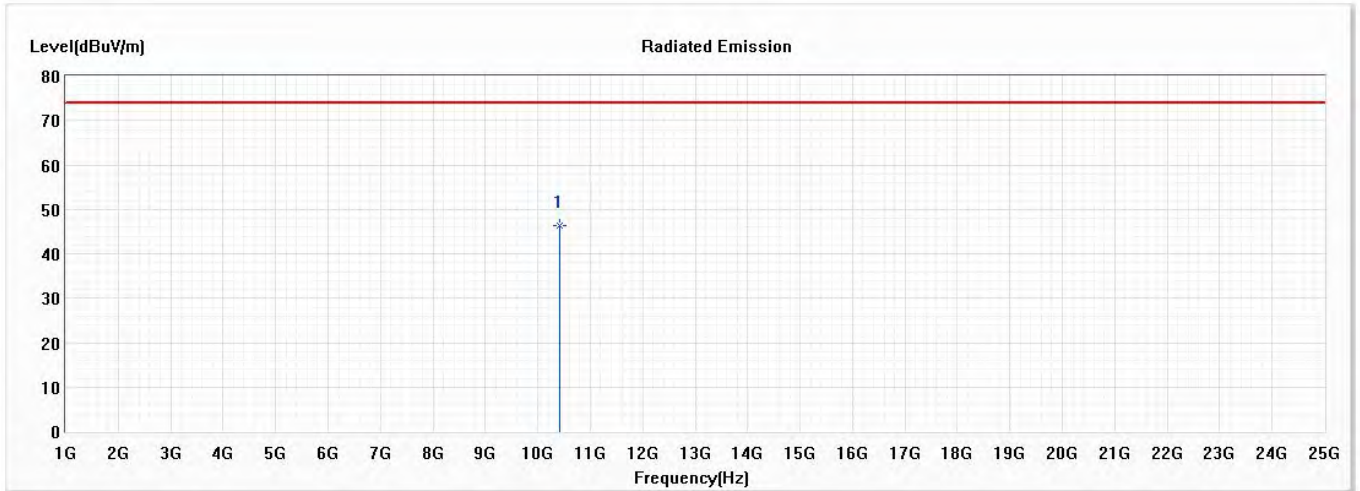


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10420.000 | 46.43 | 74.00 | -27.57 | 56.57 | -10.14 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Horizontal

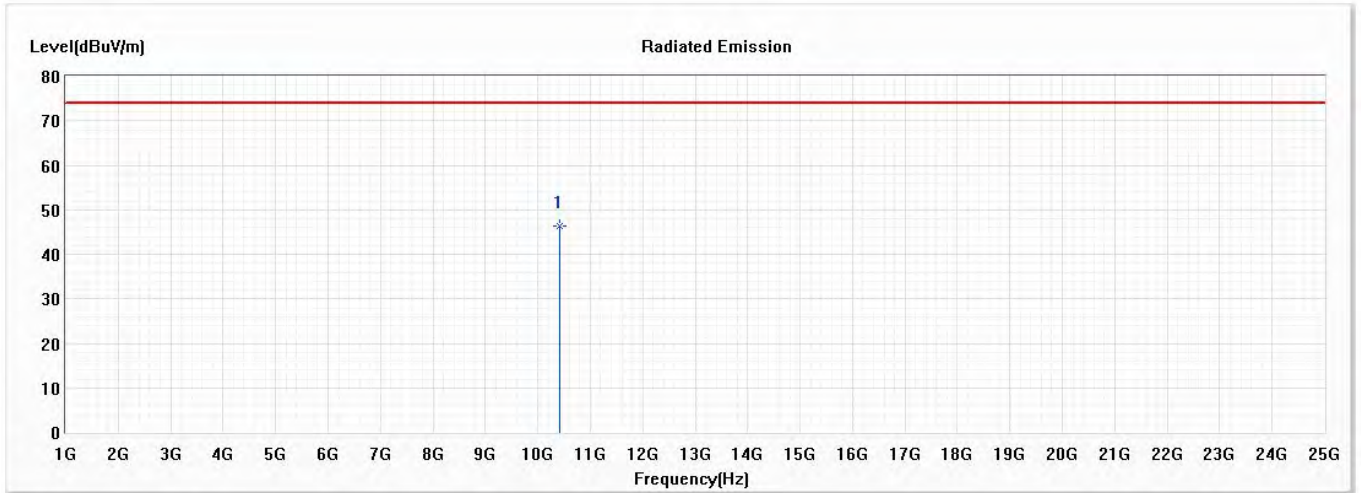


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10420.000 | 46.28 | 74.00 | -27.72 | 56.42 | -10.14 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Vertical

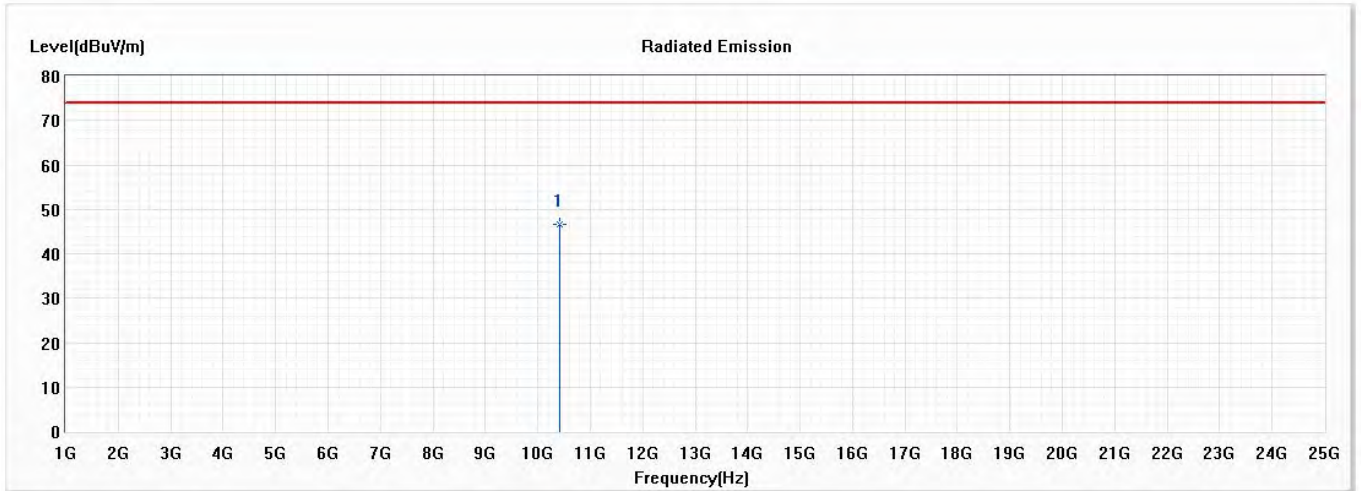


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10420.000 | 46.66 | 74.00 | -27.34 | 56.80 | -10.14 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Horizontal

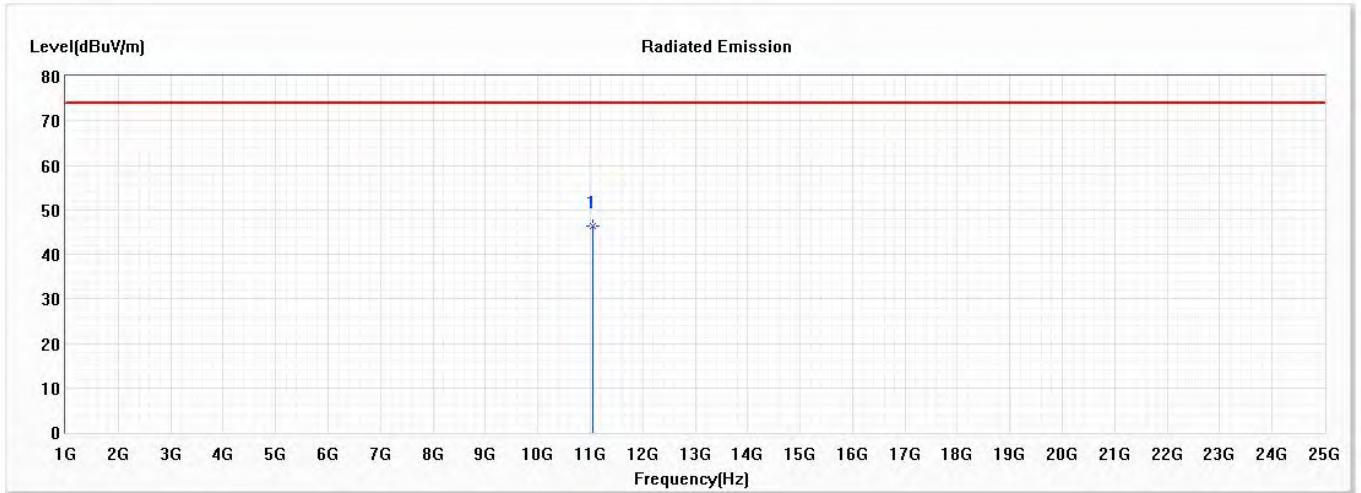


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11060.000 | 46.38 | 74.00 | -27.62 | 55.54 | -9.16 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Vertical

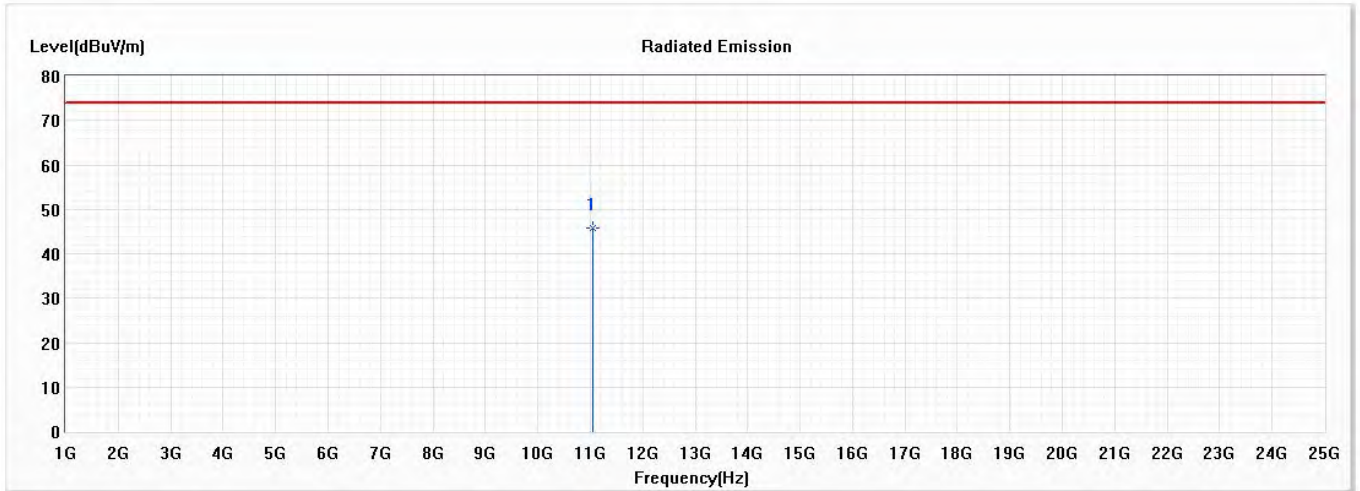


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11060.000 | 45.91 | 74.00 | -28.09 | 55.07 | -9.16 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5610MHz)

Horizontal

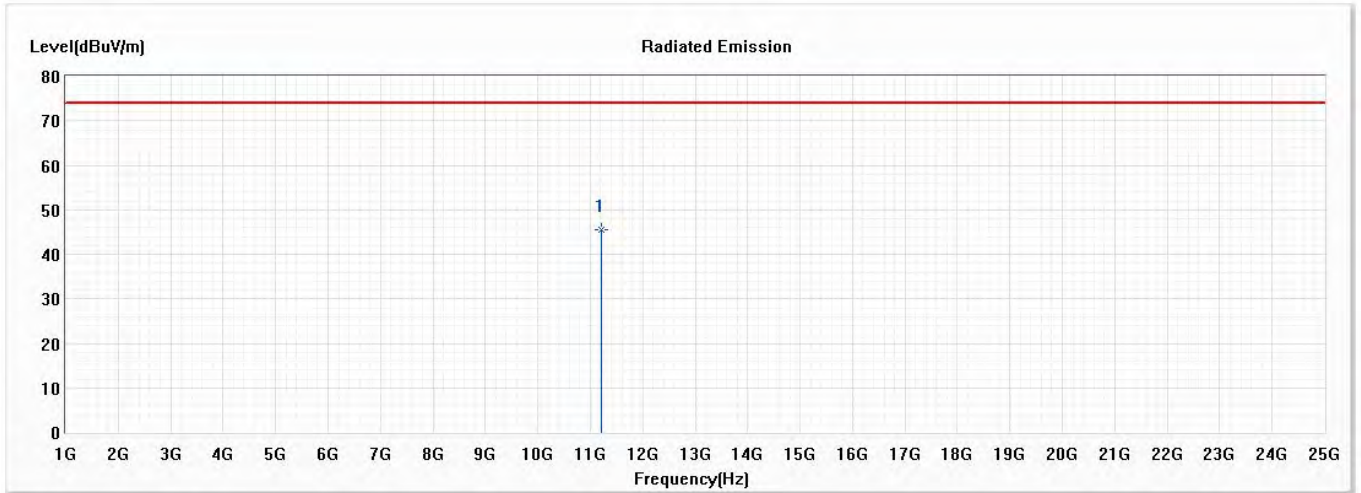


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11220.000 | 45.44 | 74.00 | -28.56 | 54.42 | -8.98 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5610MHz)

Vertical

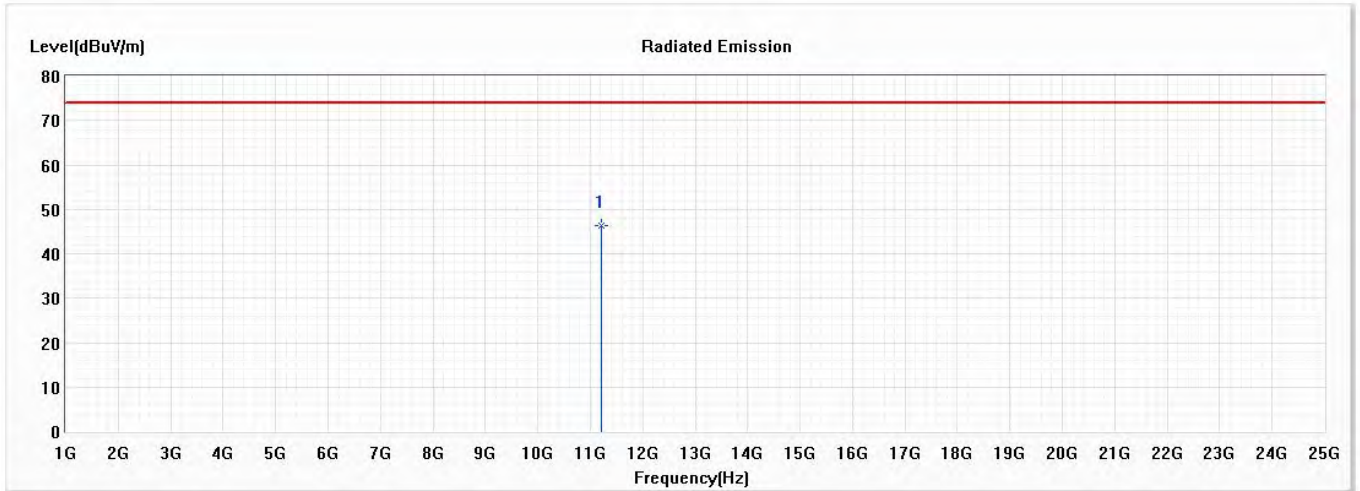


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11220.000 | 46.30 | 74.00 | -27.70 | 55.28 | -8.98 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5690MHz)

Horizontal

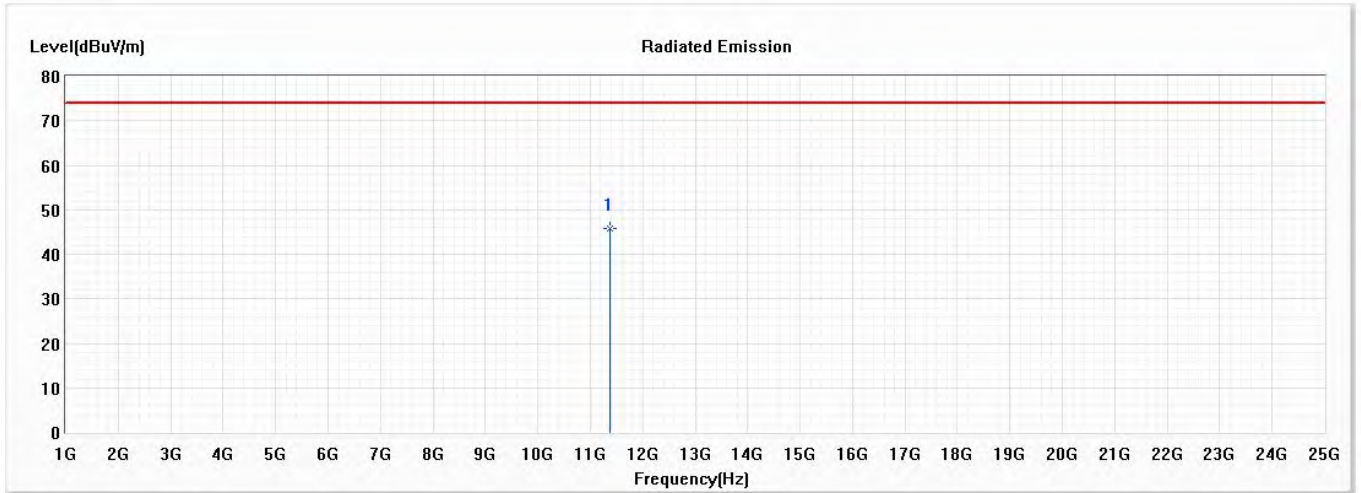


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11380.000 | 45.75 | 74.00 | -28.25 | 54.57 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5690MHz)

Vertical

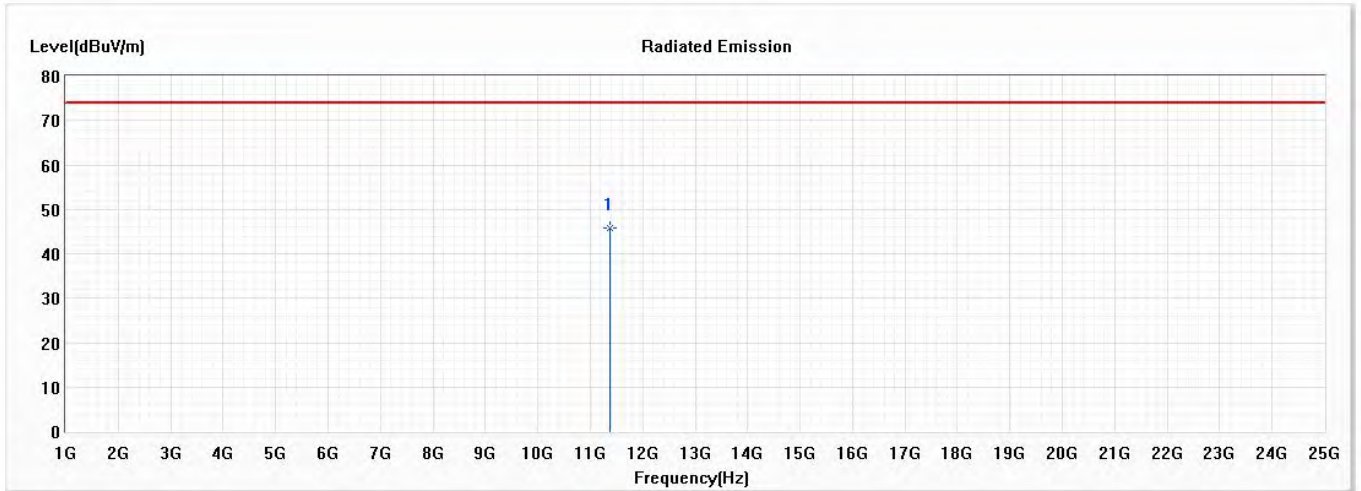


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11380.000 | 45.68 | 74.00 | -28.32 | 54.50 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Horizontal

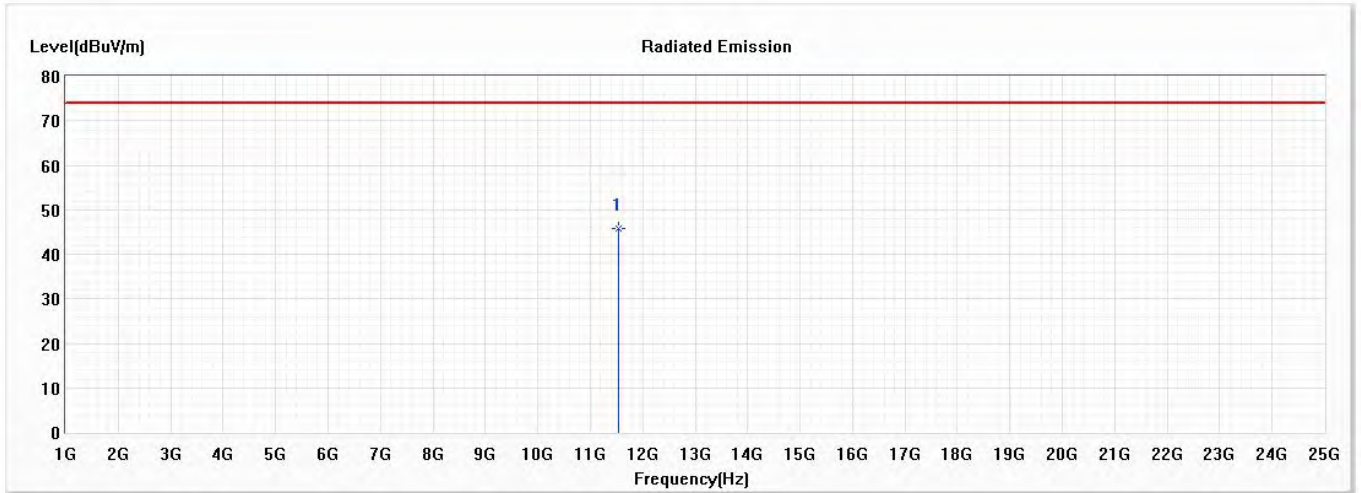


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11550.000 | 45.76 | 74.00 | -28.24 | 54.37 | -8.61 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Vertical

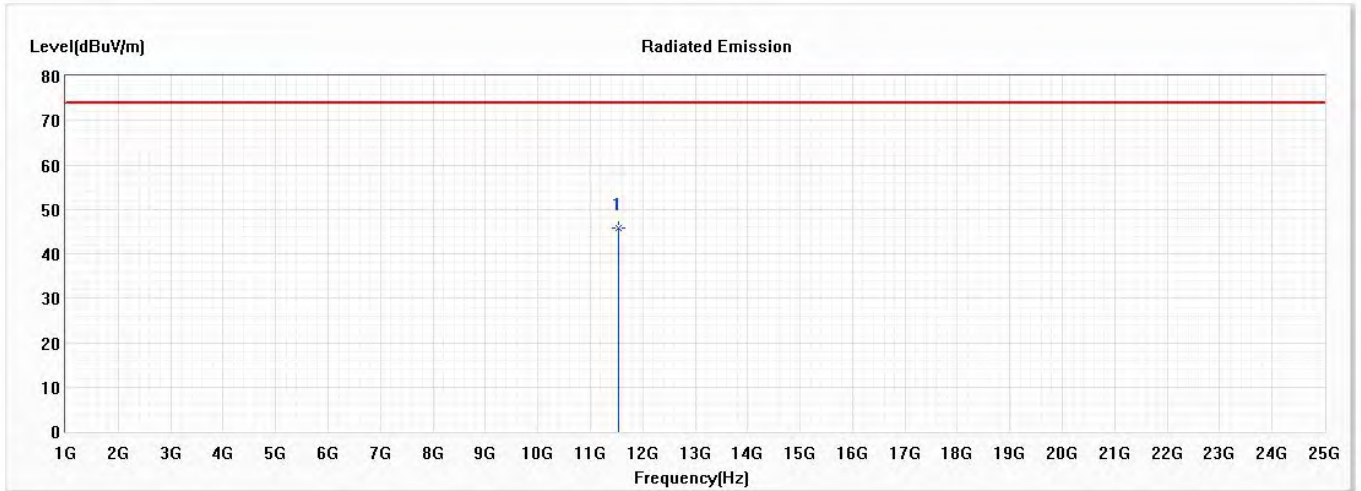


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11550.000 | 45.91 | 74.00 | -28.09 | 54.52 | -8.61 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 9: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Horizontal

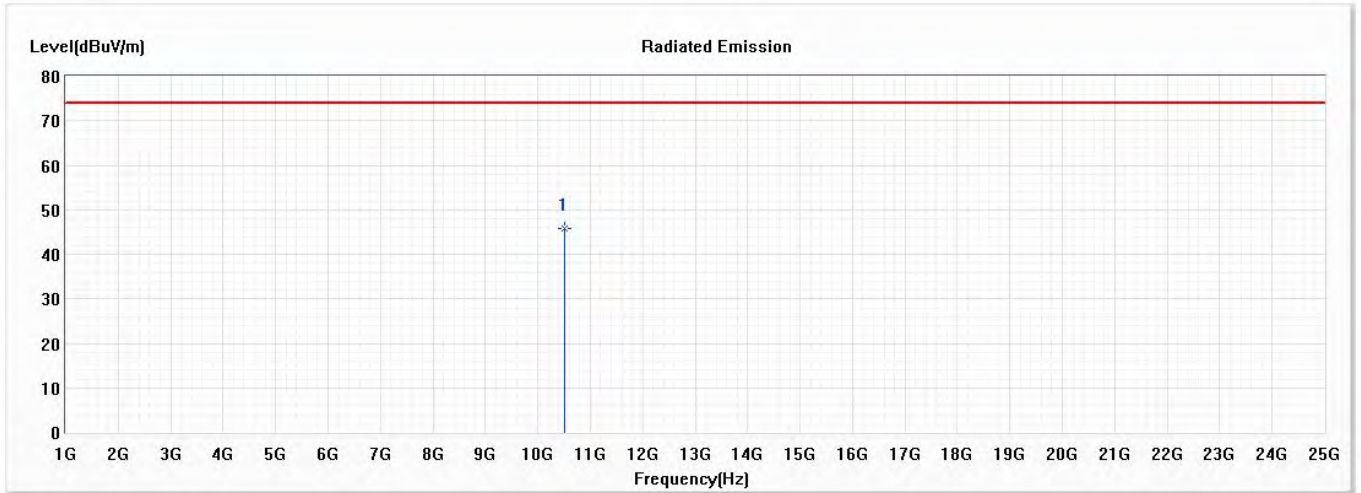


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10500.000 | 45.87 | 74.00 | -28.13 | 55.79 | -9.92 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 9: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Vertical

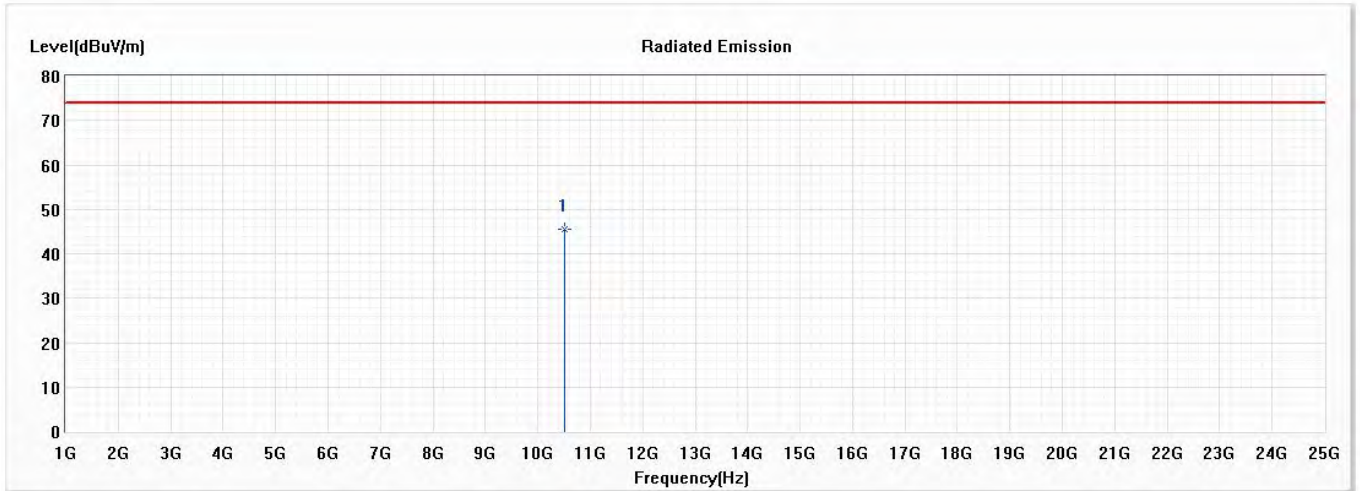


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10500.000 | 45.49 | 74.00 | -28.51 | 55.41 | -9.92 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 9: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Horizontal

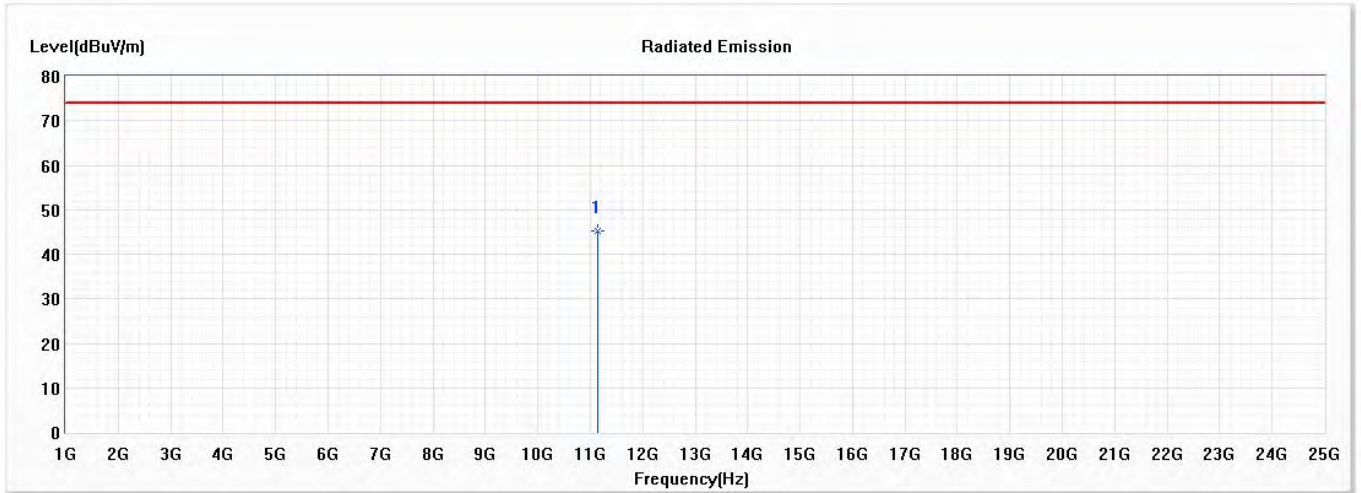


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11140.000 | 45.25 | 74.00 | -28.75 | 54.33 | -9.08 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 9: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Vertical

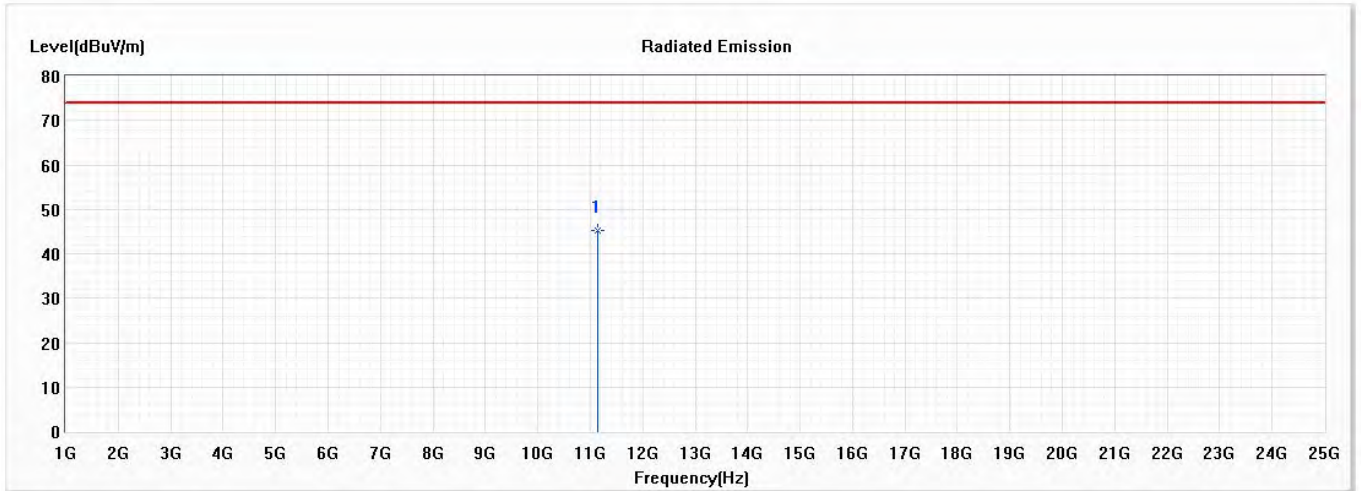


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11140.000 | 45.35 | 74.00 | -28.65 | 54.43 | -9.08 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5180MHz)

Horizontal

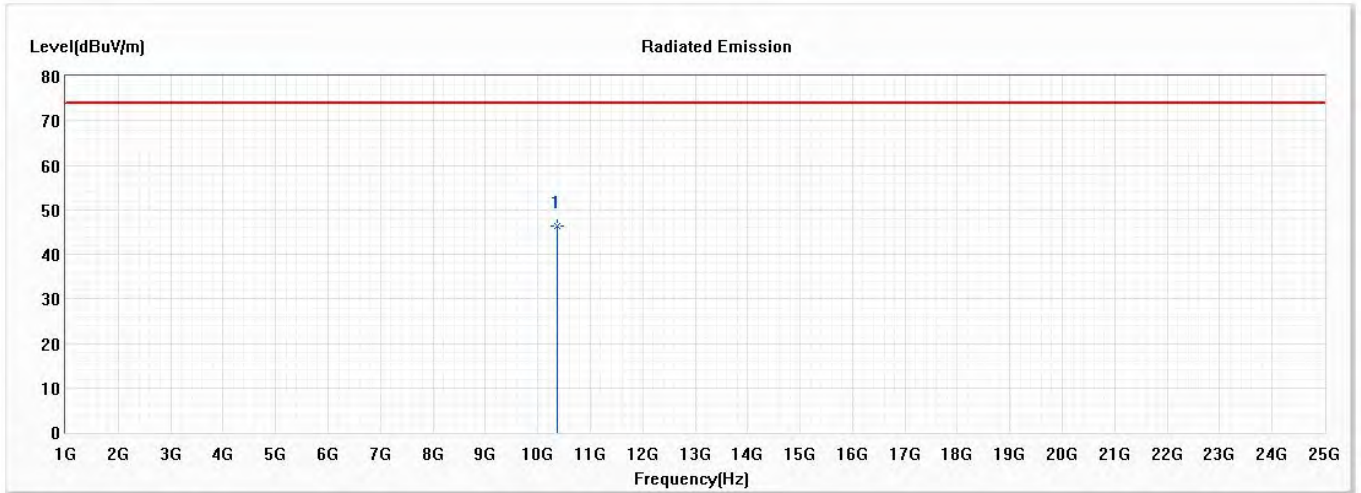


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10360.000 | 46.45 | 74.00 | -27.55 | 56.67 | -10.22 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5180MHz)

Vertical

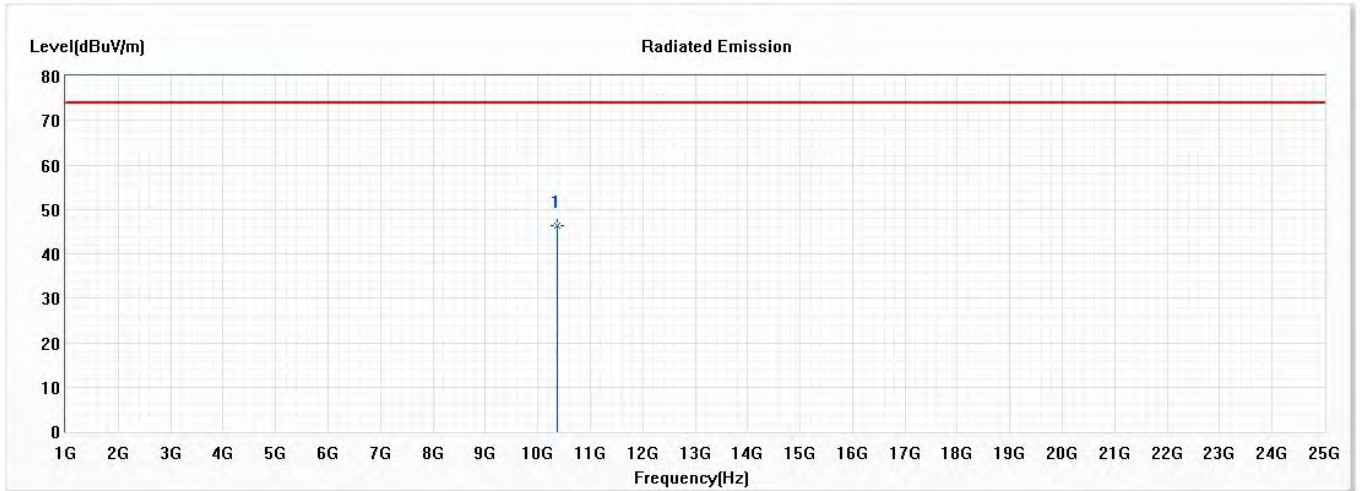


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10360.000 | 46.28 | 74.00 | -27.72 | 56.50 | -10.22 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5220MHz)

Horizontal

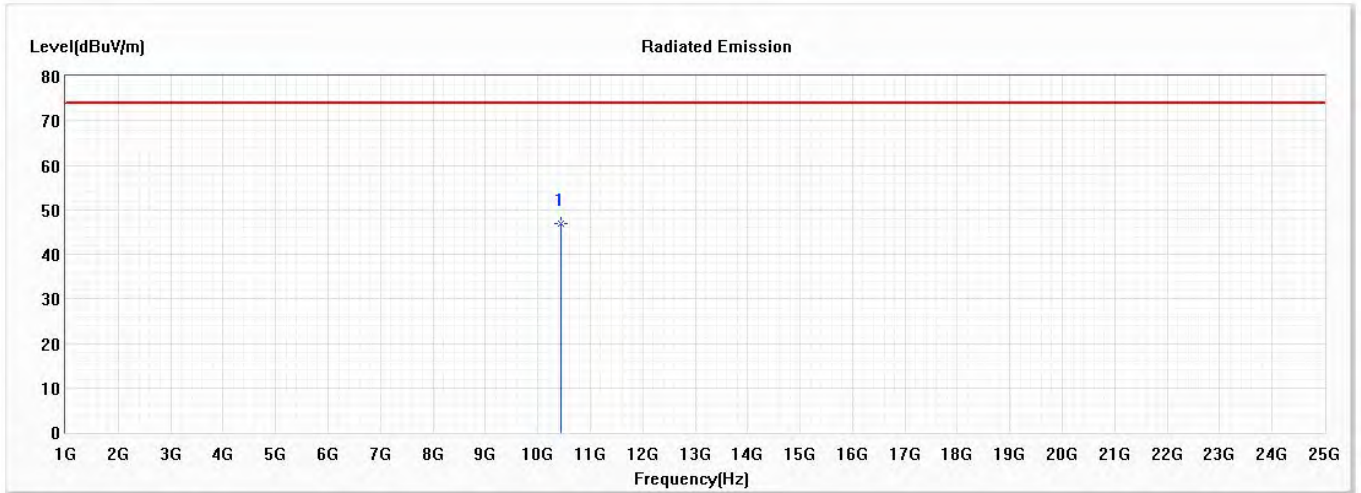


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10440.000 | 46.85 | 74.00 | -27.15 | 56.94 | -10.09 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5220MHz)

Vertical

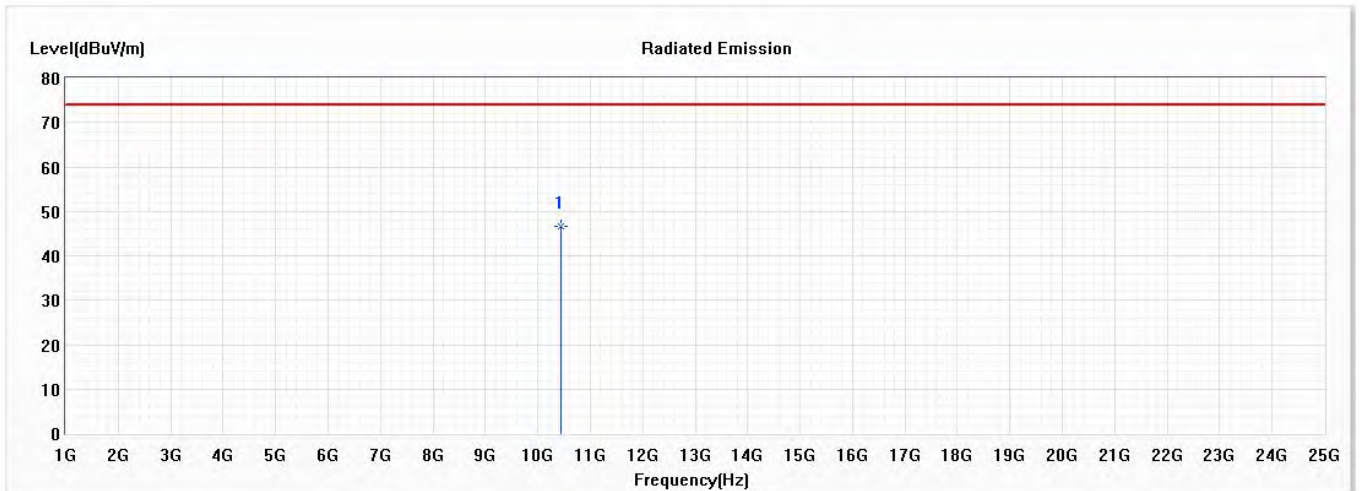


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10440.000 | 46.72 | 74.00 | -27.28 | 56.81 | -10.09 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5240MHz)

Horizontal

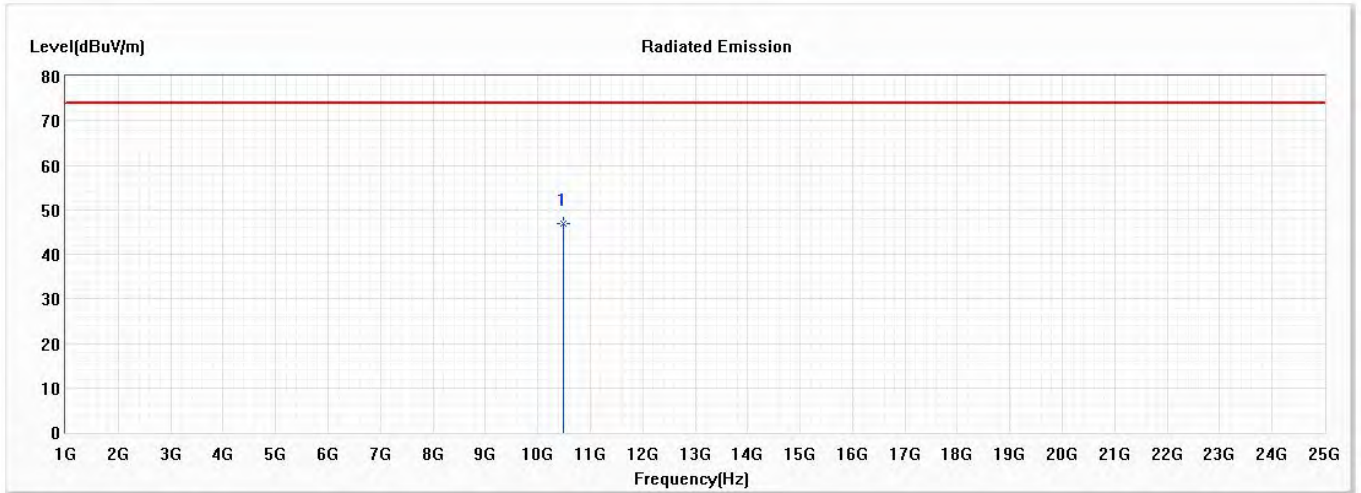


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10480.000 | 46.90 | 74.00 | -27.10 | 56.82 | -9.92 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5240MHz)

Vertical

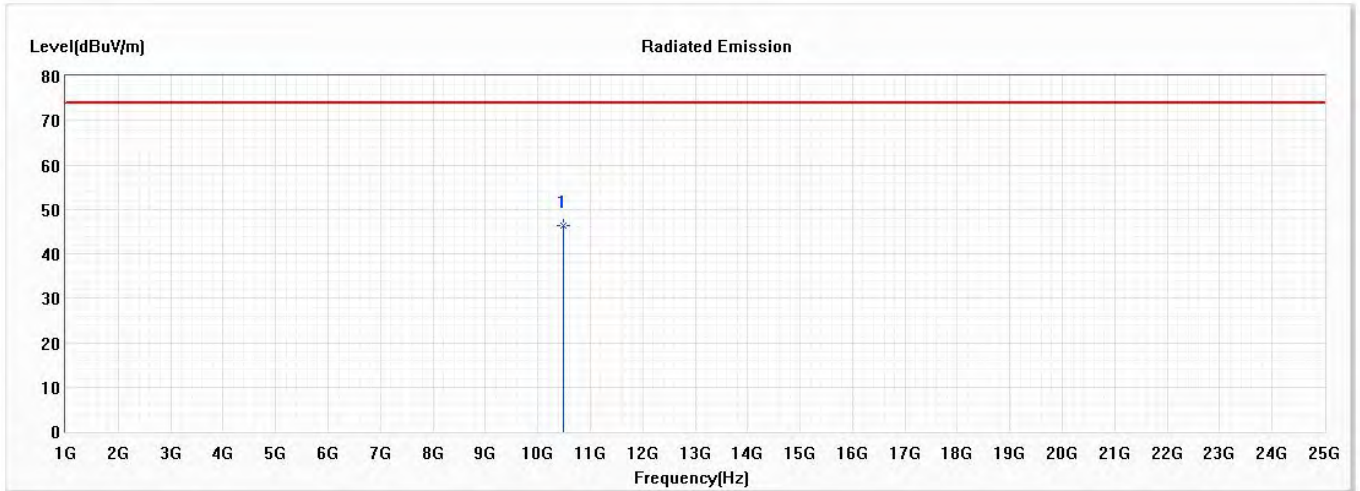


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10480.000 | 46.37 | 74.00 | -27.63 | 56.29 | -9.92 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5260MHz)

Horizontal

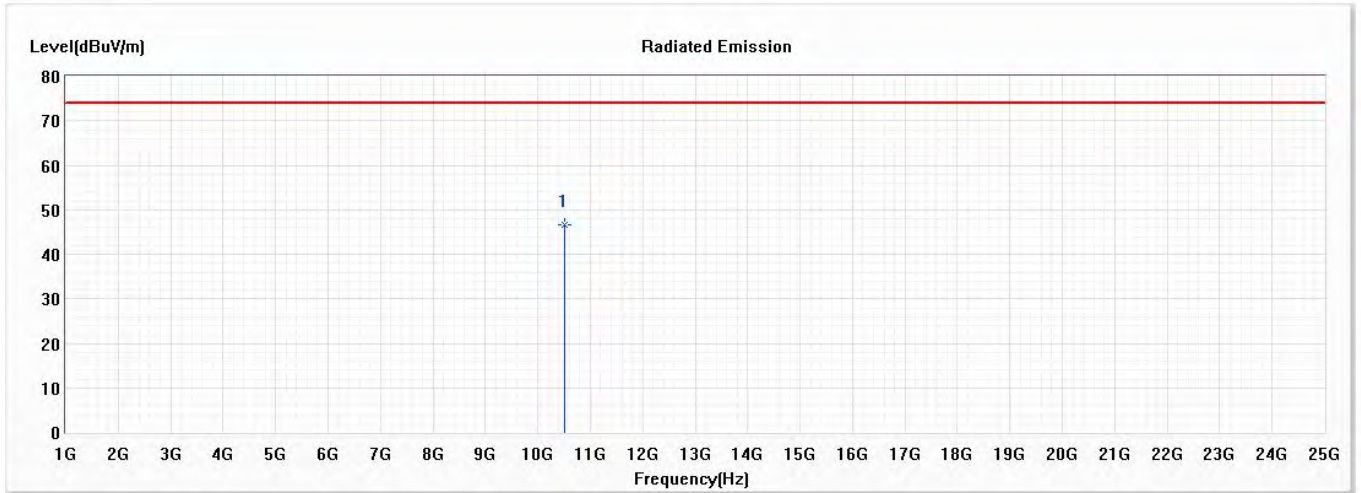


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10520.000 | 46.59 | 74.00 | -27.41 | 56.49 | -9.90 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5260MHz)

Vertical

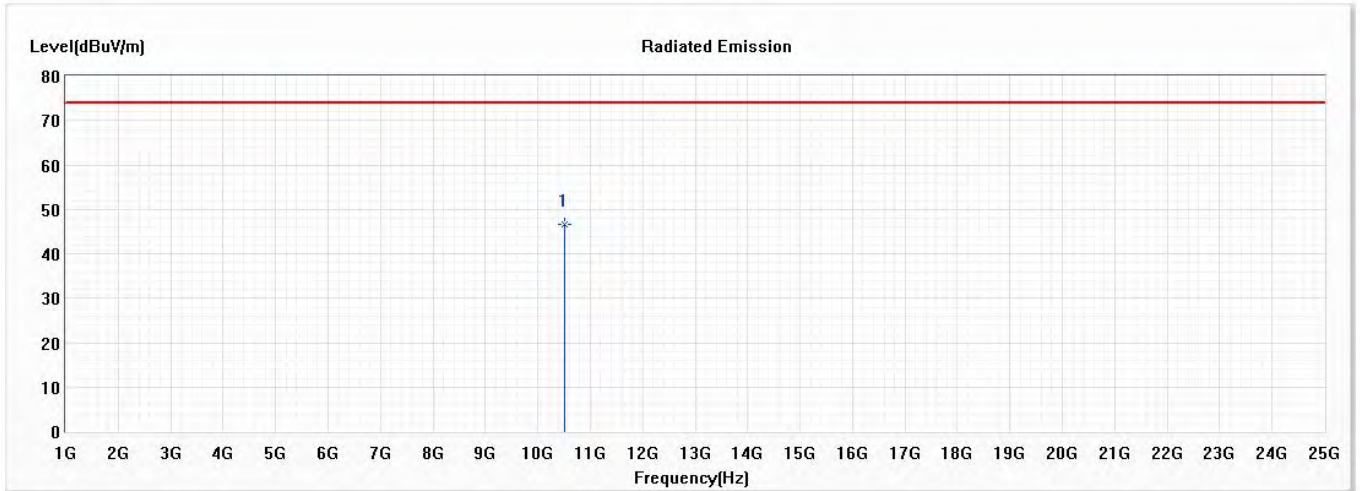


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10520.000 | 46.61 | 74.00 | -27.39 | 56.51 | -9.90 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5300MHz)

Horizontal

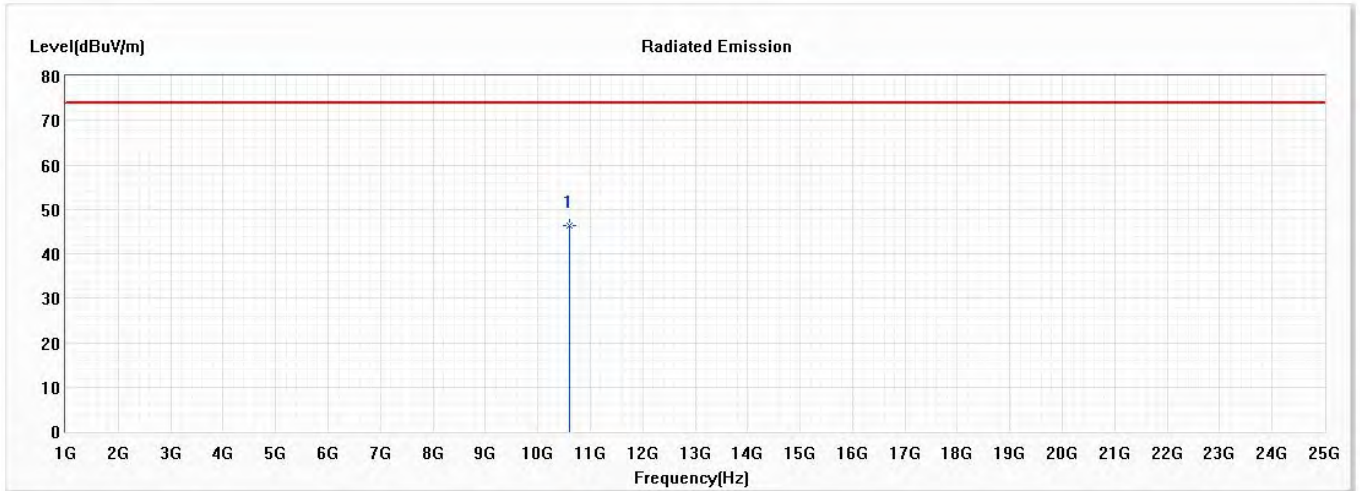


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10600.000 | 46.39 | 74.00 | -27.61 | 56.19 | -9.80 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5300MHz)

Vertical

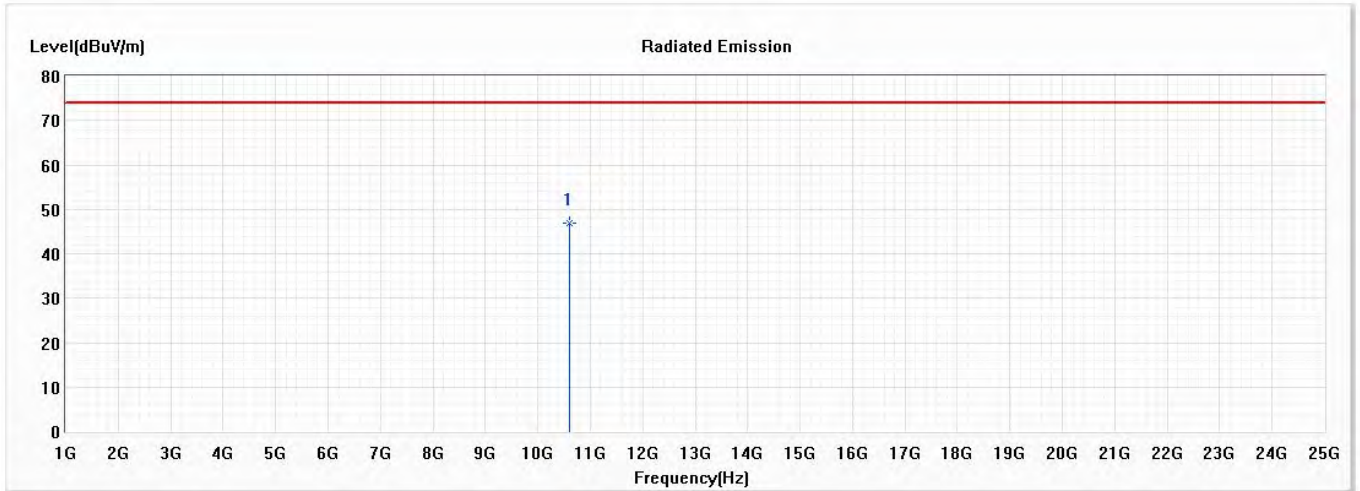


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10600.000 | 46.78 | 74.00 | -27.22 | 56.58 | -9.80 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5320MHz)

Horizontal

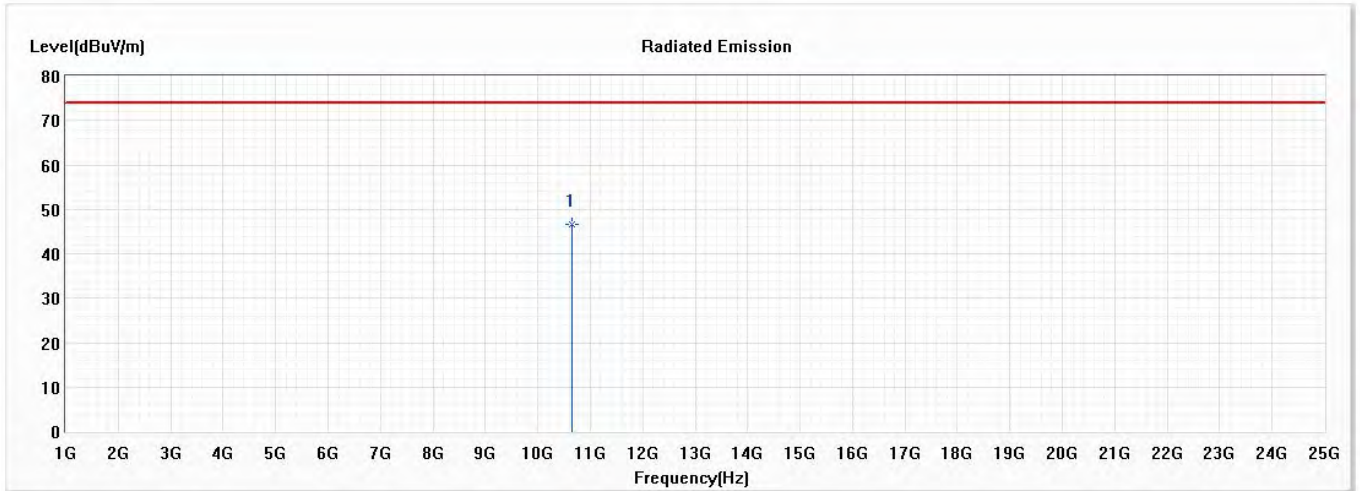


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10640.000 | 46.53 | 74.00 | -27.47 | 56.26 | -9.73 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5320MHz)

Vertical

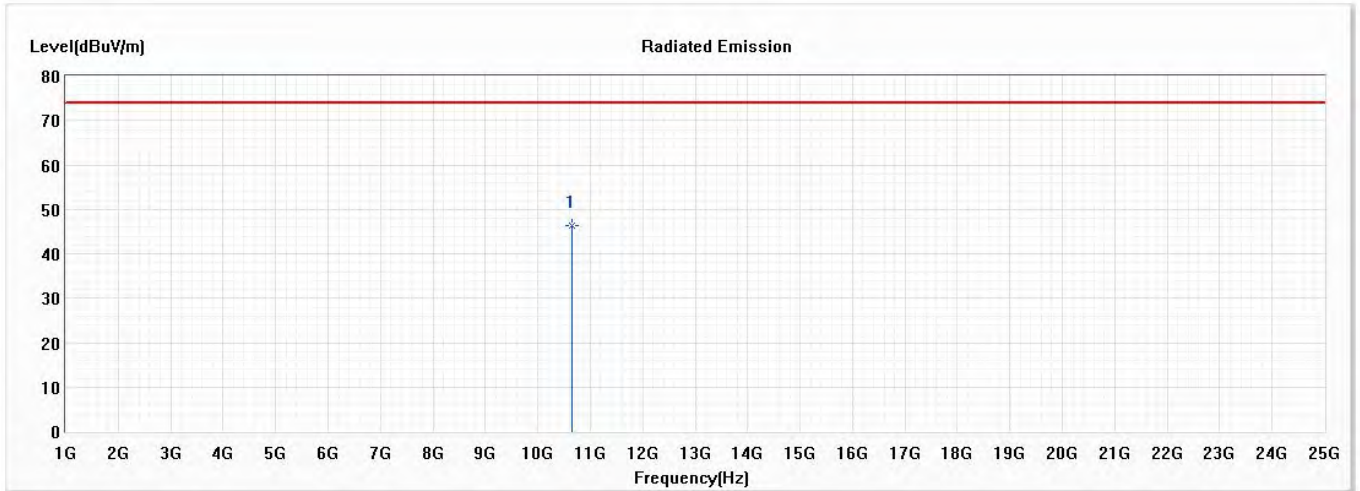


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10640.000 | 46.24 | 74.00 | -27.76 | 55.97 | -9.73 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5500MHz)

Horizontal

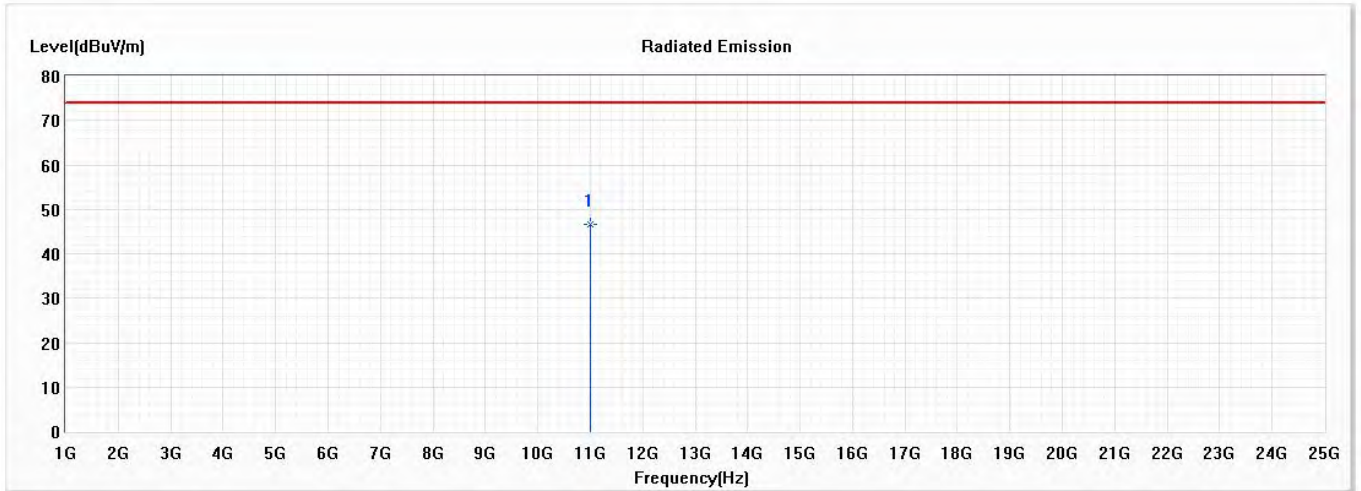


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11000.000 | 46.57 | 74.00 | -27.43 | 55.90 | -9.33 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5500MHz)

Vertical

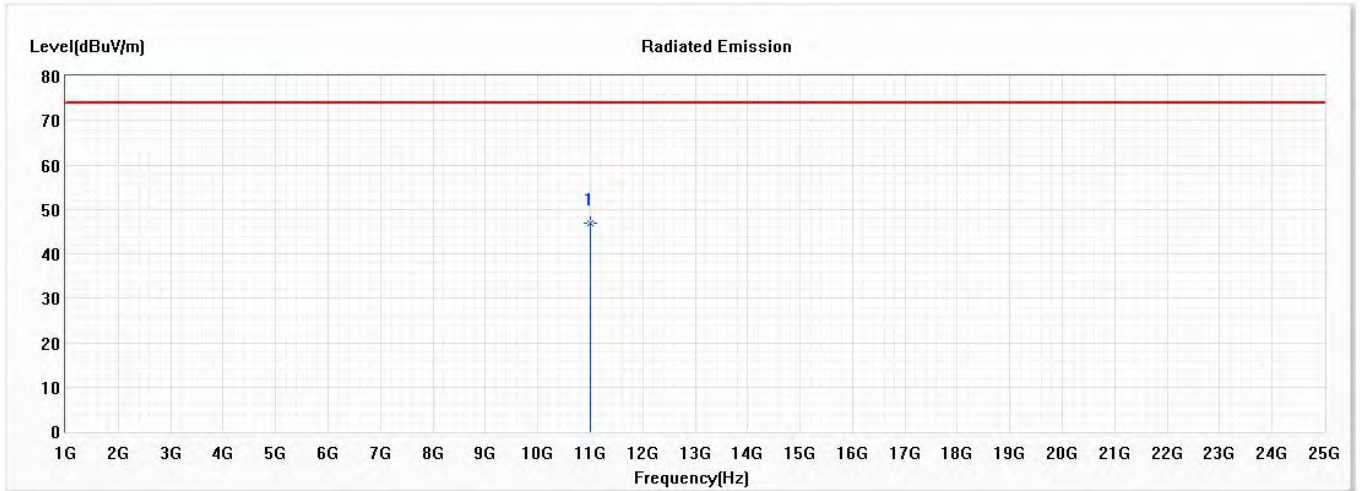


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11000.000 | 46.86 | 74.00 | -27.14 | 56.19 | -9.33 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5580MHz)

Horizontal

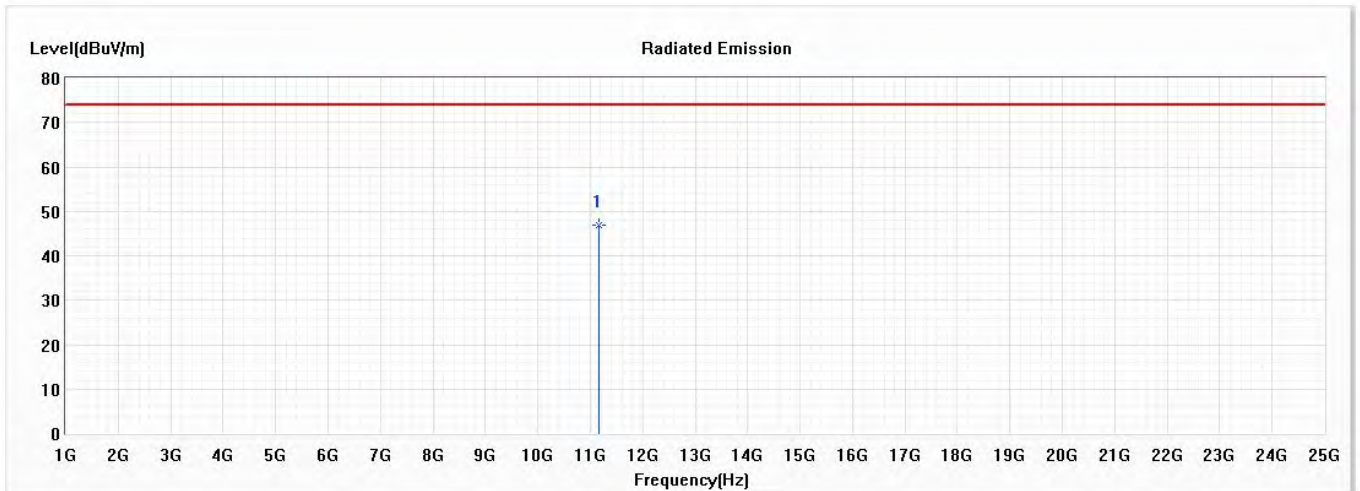


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11160.000 | 46.96 | 74.00 | -27.04 | 56.01 | -9.05 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5580MHz)

Vertical

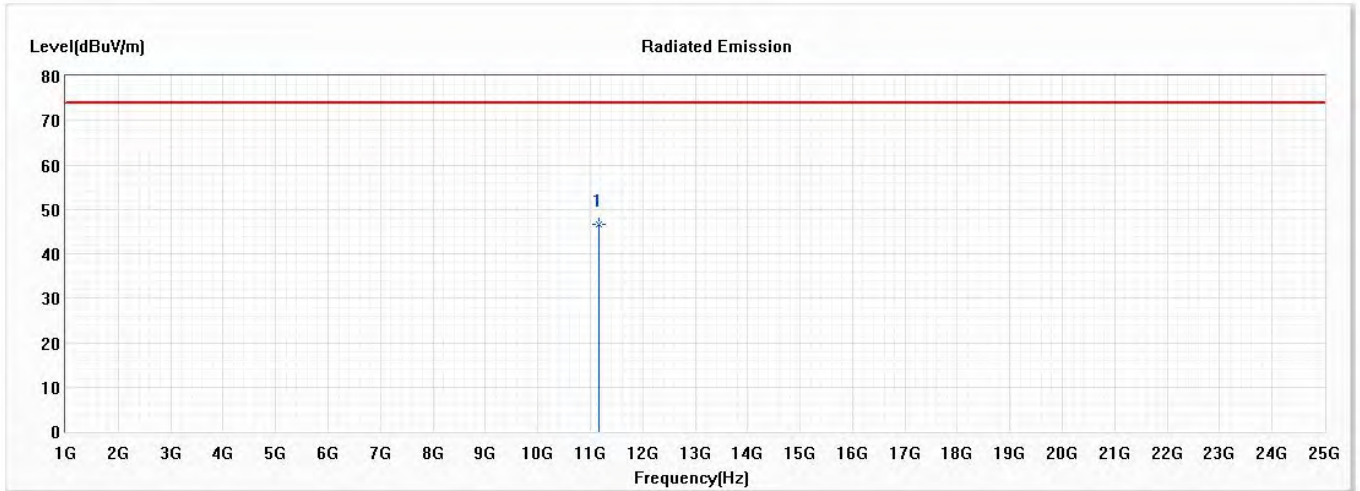


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11160.000 | 46.75 | 74.00 | -27.25 | 55.80 | -9.05 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5700MHz)

Horizontal

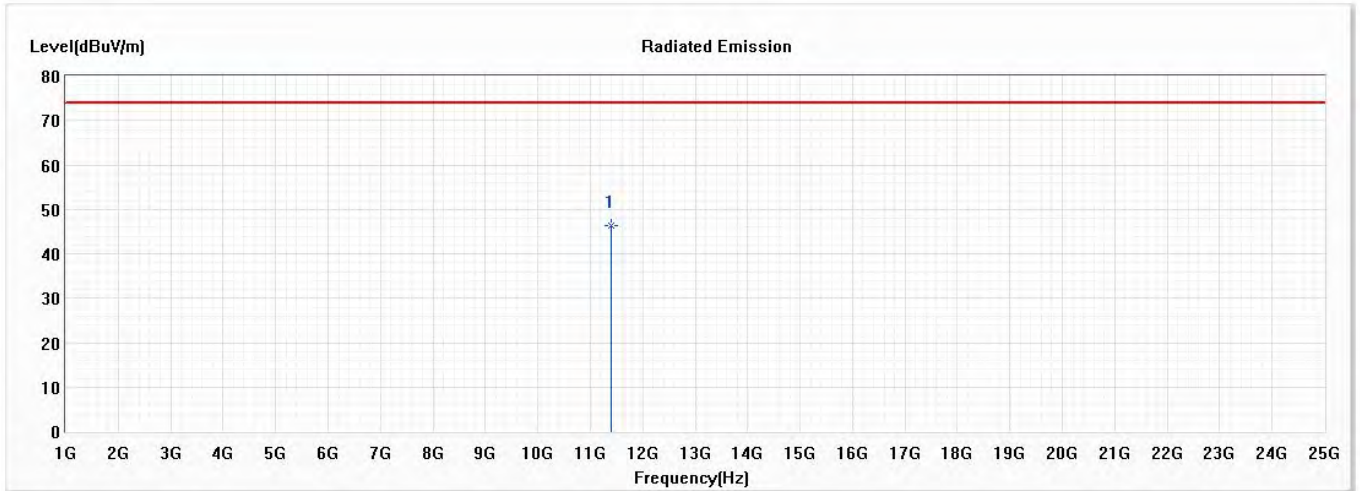


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11400.000 | 46.32 | 74.00 | -27.68 | 55.15 | -8.83 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5700MHz)

Vertical

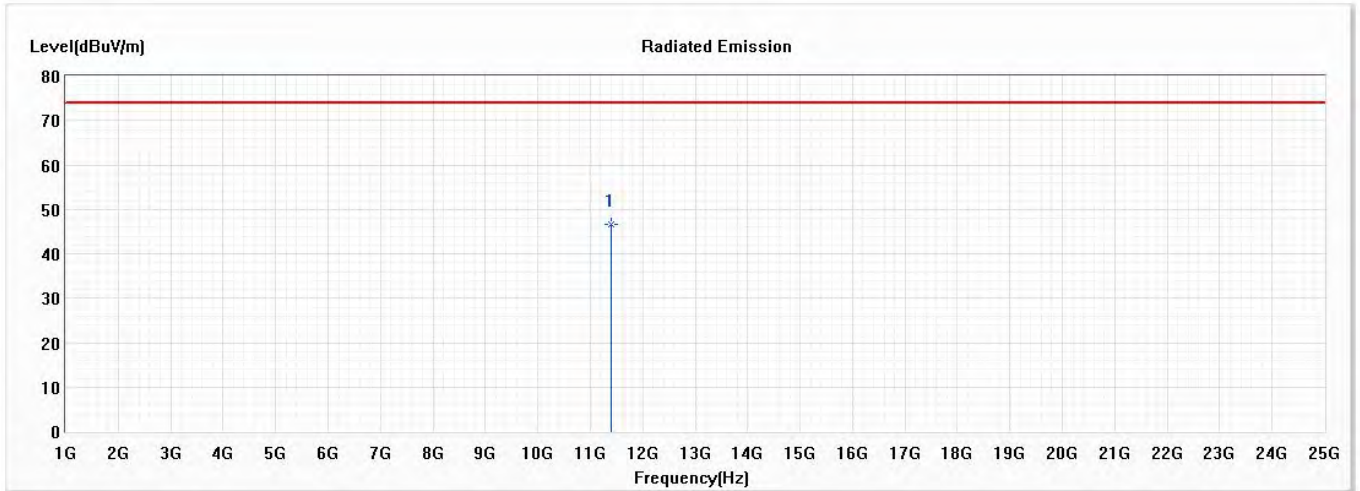


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11400.000 | 46.61 | 74.00 | -27.39 | 55.44 | -8.83 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5720MHz)

Horizontal

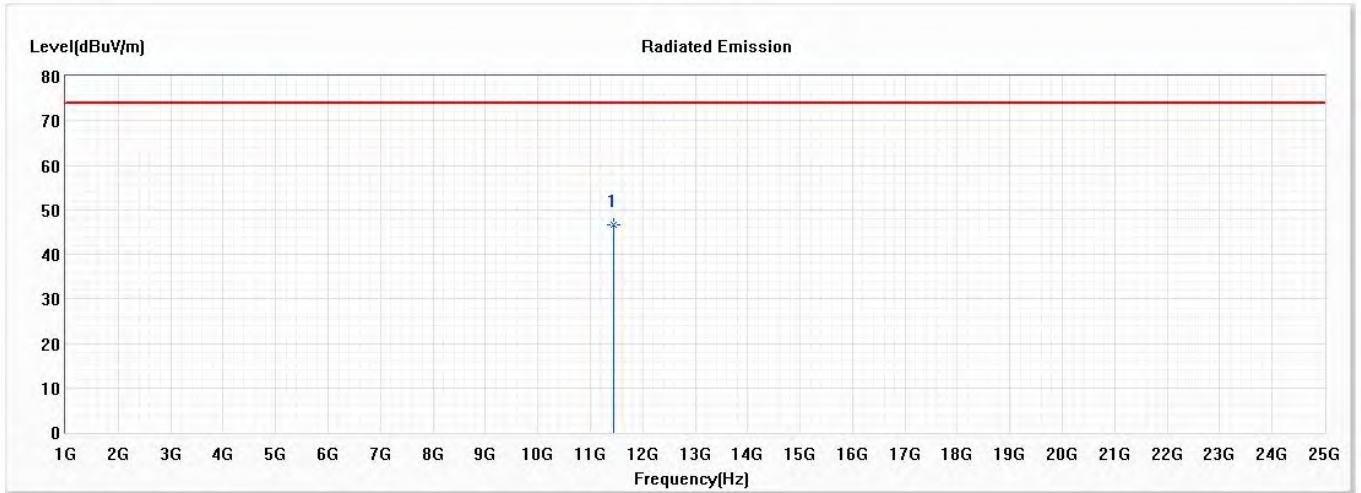


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11440.000 | 46.74 | 74.00 | -27.26 | 55.56 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5720MHz)

Vertical

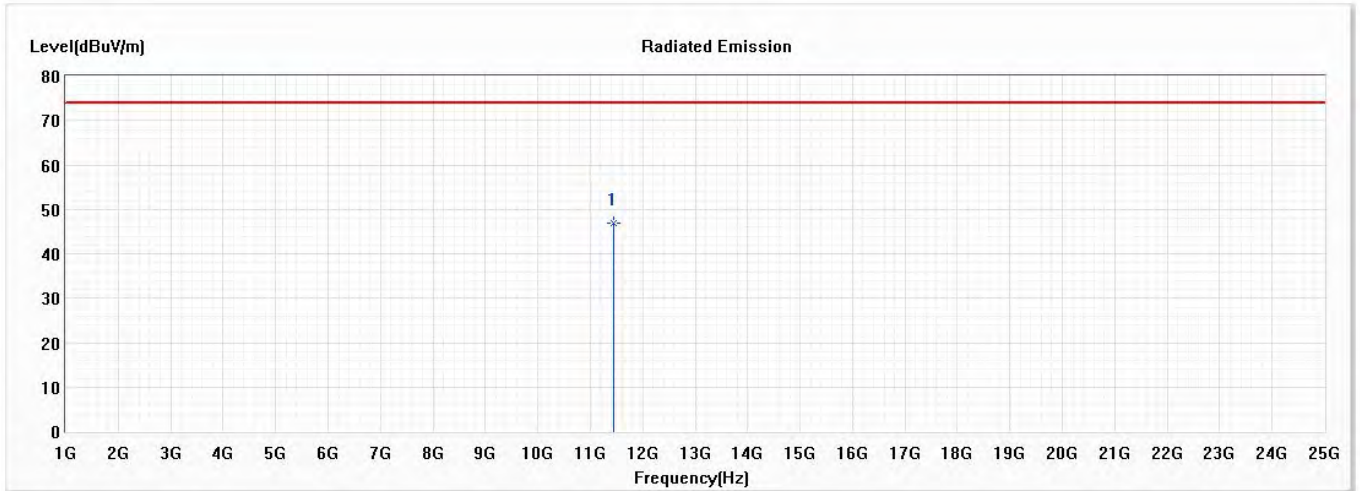


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11440.000 | 47.01 | 74.00 | -26.99 | 55.83 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5745MHz)

Horizontal

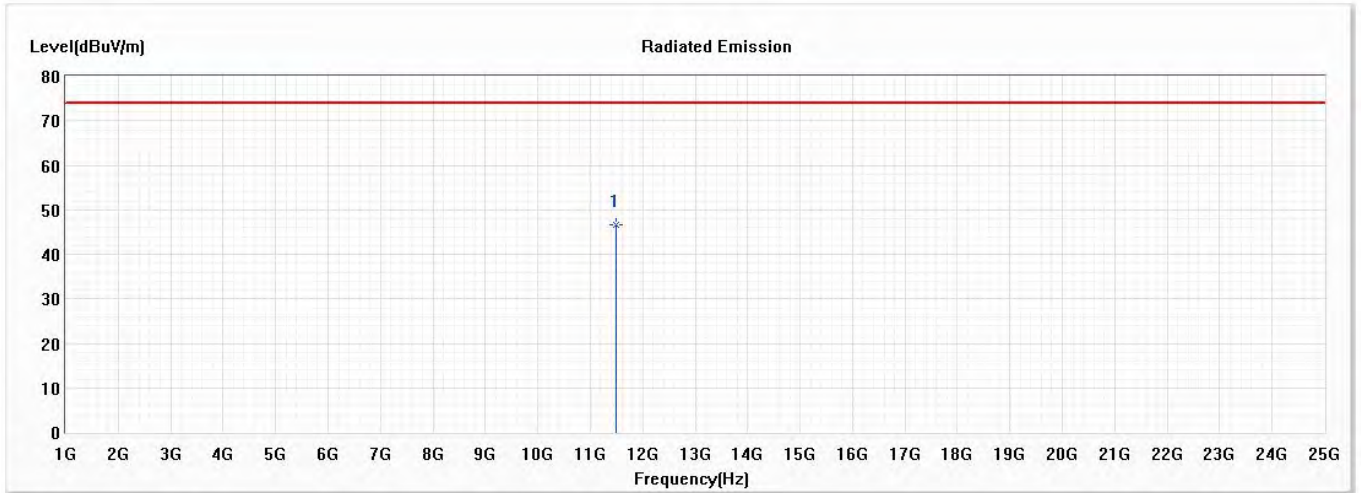


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11490.000 | 46.61 | 74.00 | -27.39 | 55.33 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5745MHz)

Vertical

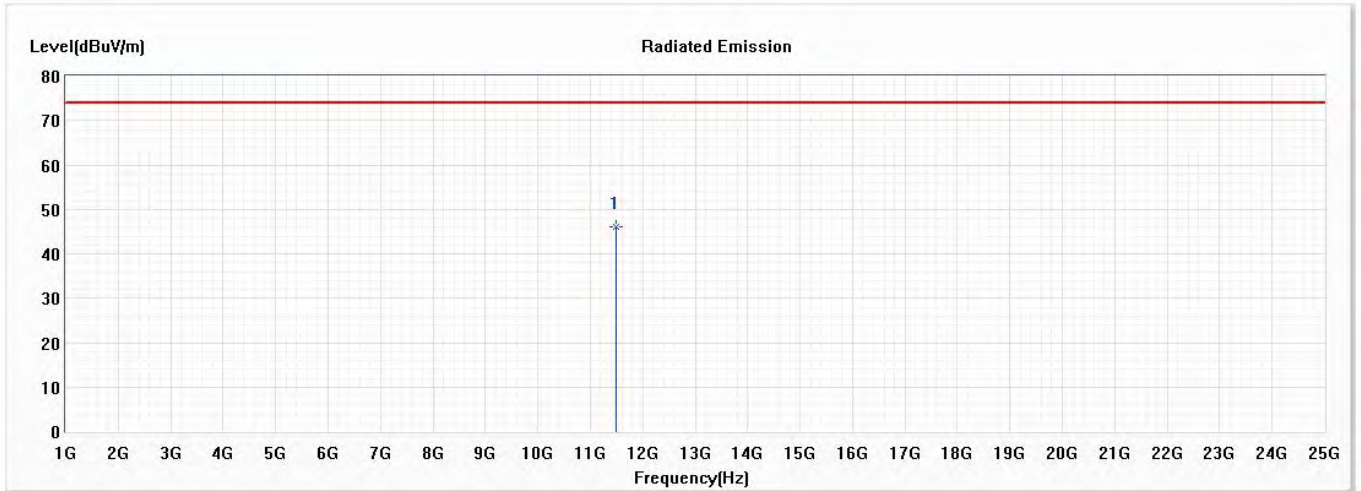


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11490.000 | 46.18 | 74.00 | -27.82 | 54.90 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5785MHz)

Horizontal

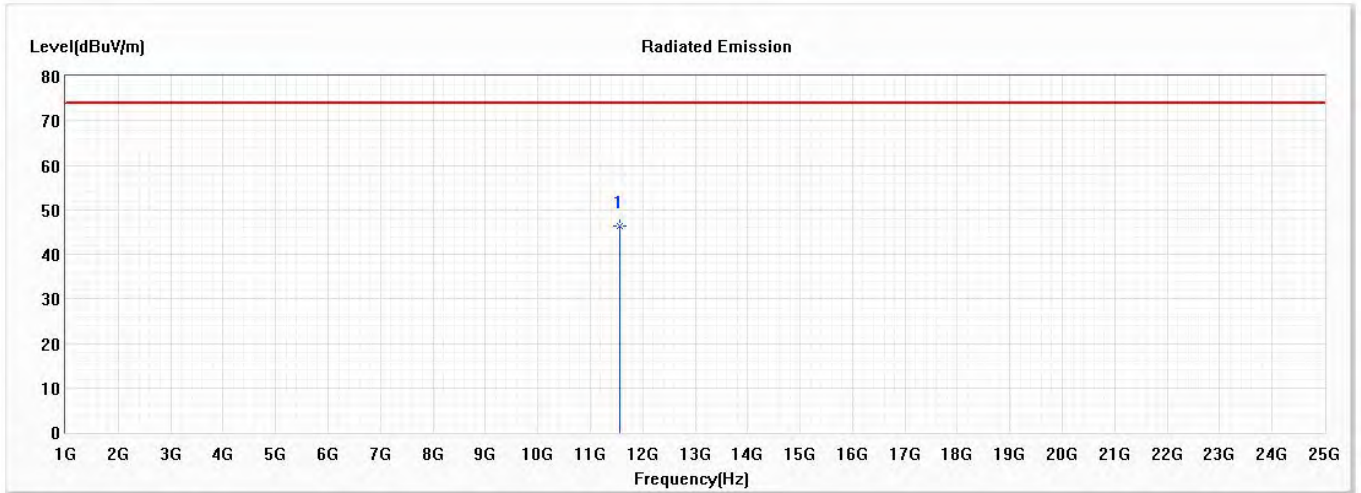


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11570.000 | 46.38 | 74.00 | -27.62 | 54.94 | -8.56 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5785MHz)

Vertical

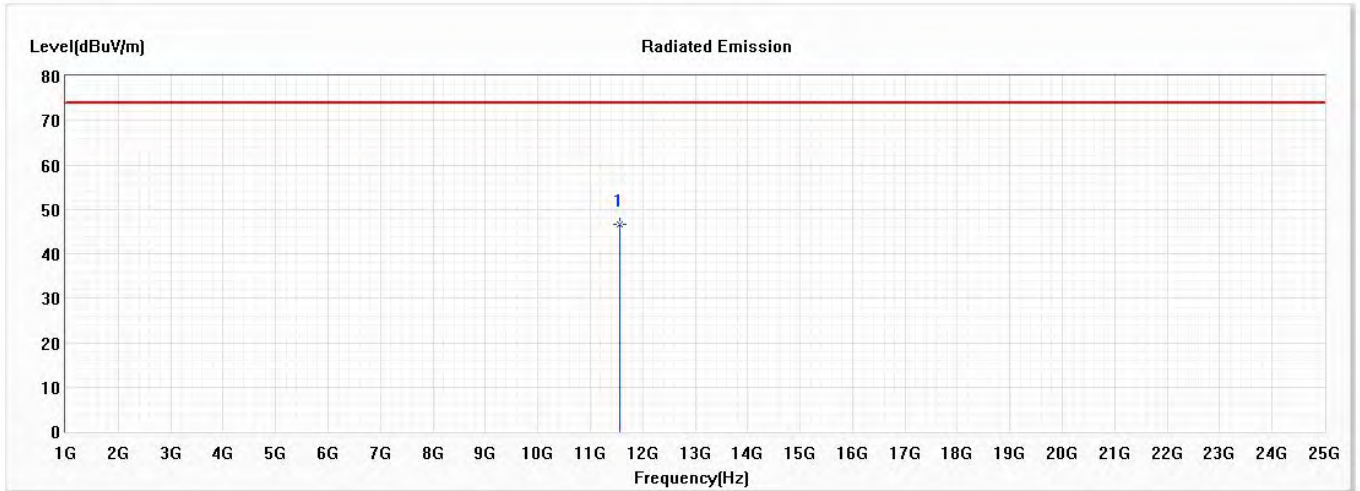


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11570.000 | 46.73 | 74.00 | -27.27 | 55.29 | -8.56 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5825MHz)

Horizontal

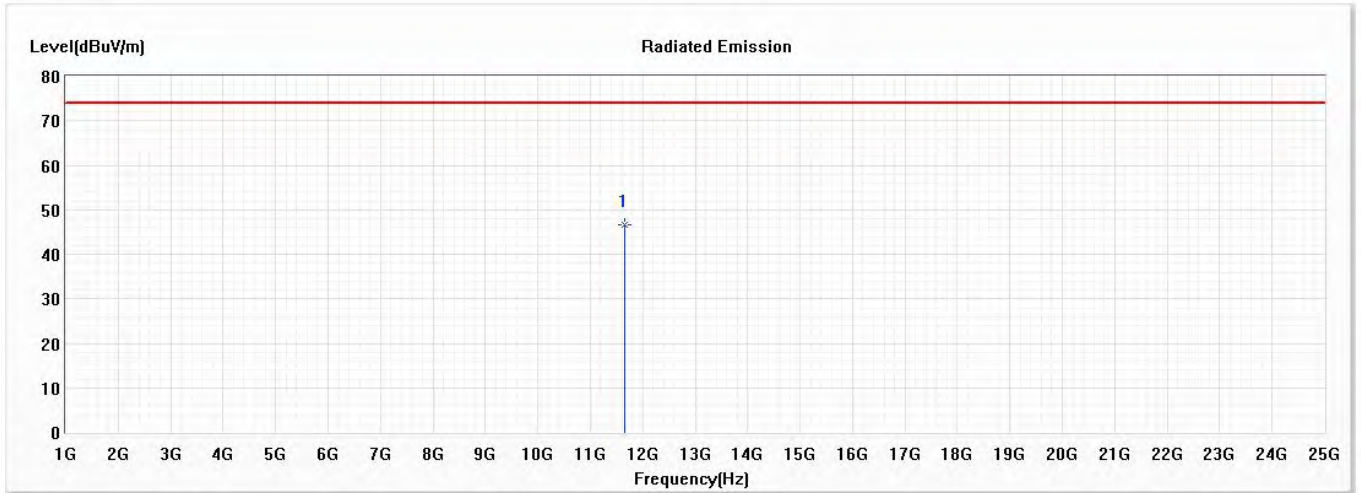


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11650.000 | 46.53 | 74.00 | -27.47 | 54.93 | -8.40 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5825MHz)

Vertical

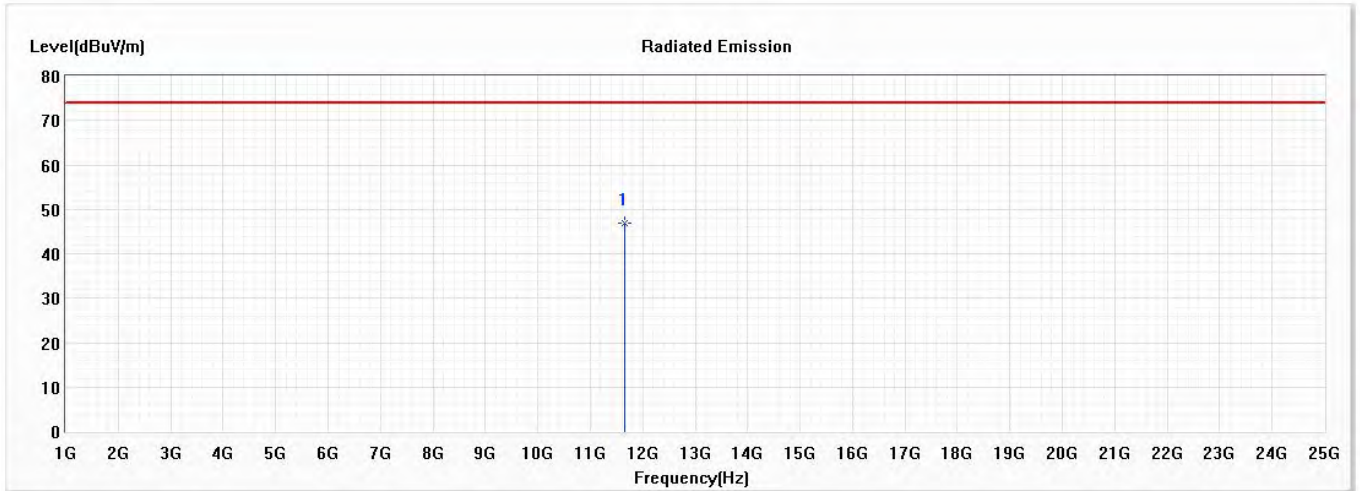


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11650.000 | 46.76 | 74.00 | -27.24 | 55.16 | -8.40 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5190MHz)

Horizontal

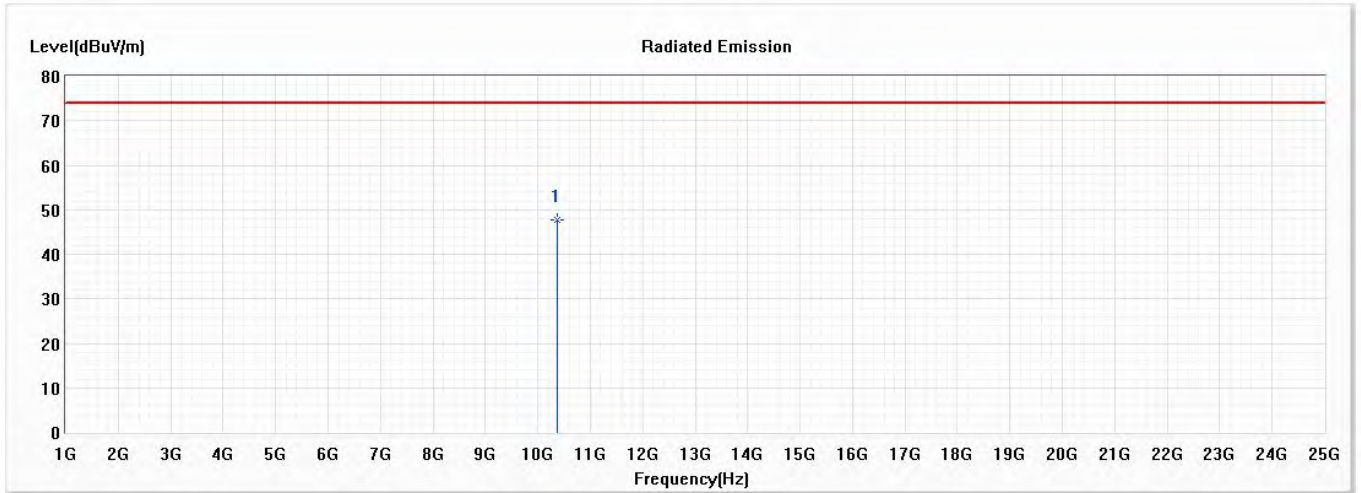


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10380.000 | 47.83 | 74.00 | -26.17 | 58.02 | -10.19 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5190MHz)

Vertical

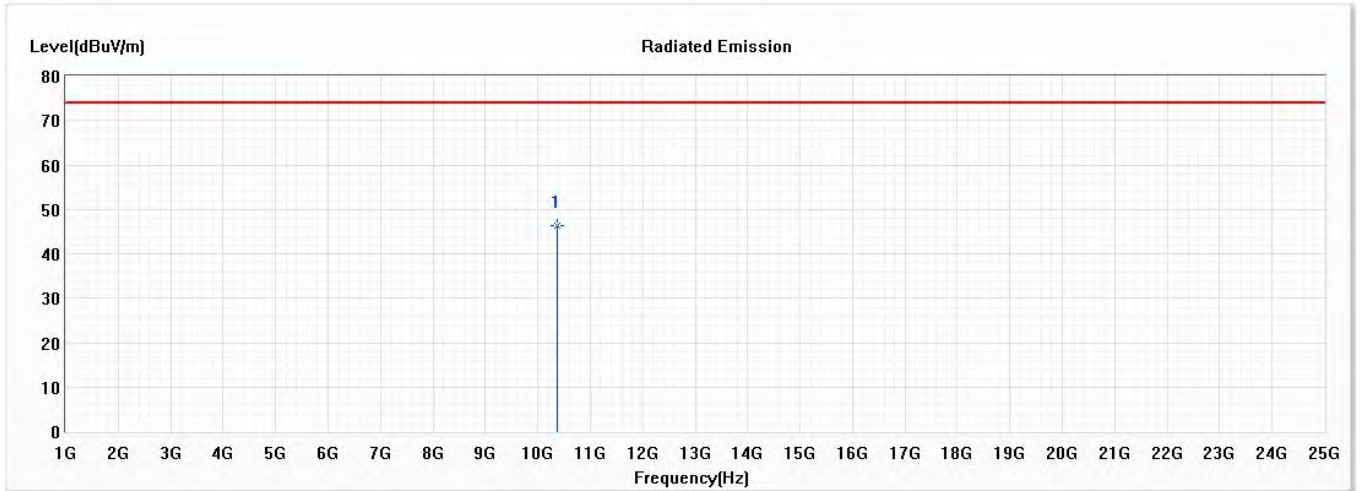


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10380.000 | 46.35 | 74.00 | -27.65 | 56.54 | -10.19 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5230MHz)

Horizontal

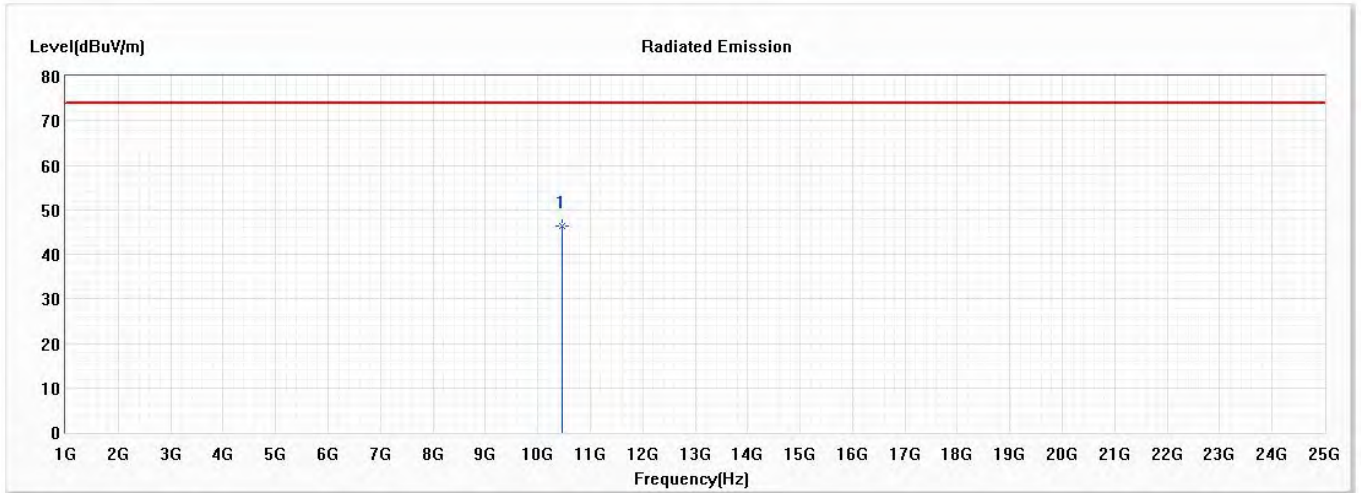


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10460.000 | 46.34 | 74.00 | -27.66 | 56.34 | -10.00 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5230MHz)

Vertical

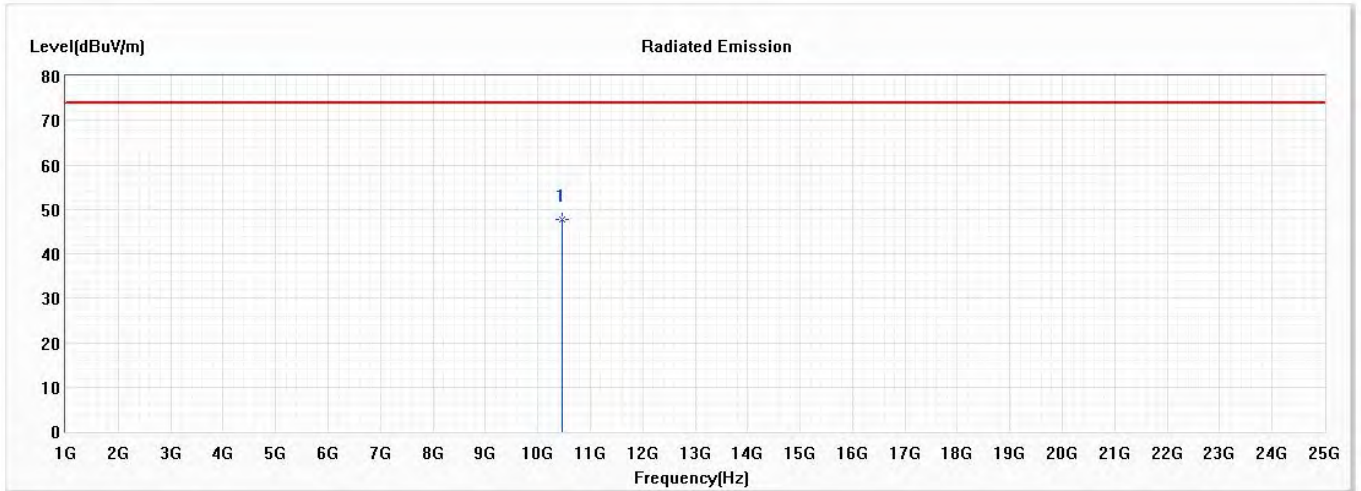


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10460.000 | 47.83 | 74.00 | -26.17 | 57.83 | -10.00 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5270MHz)

Horizontal

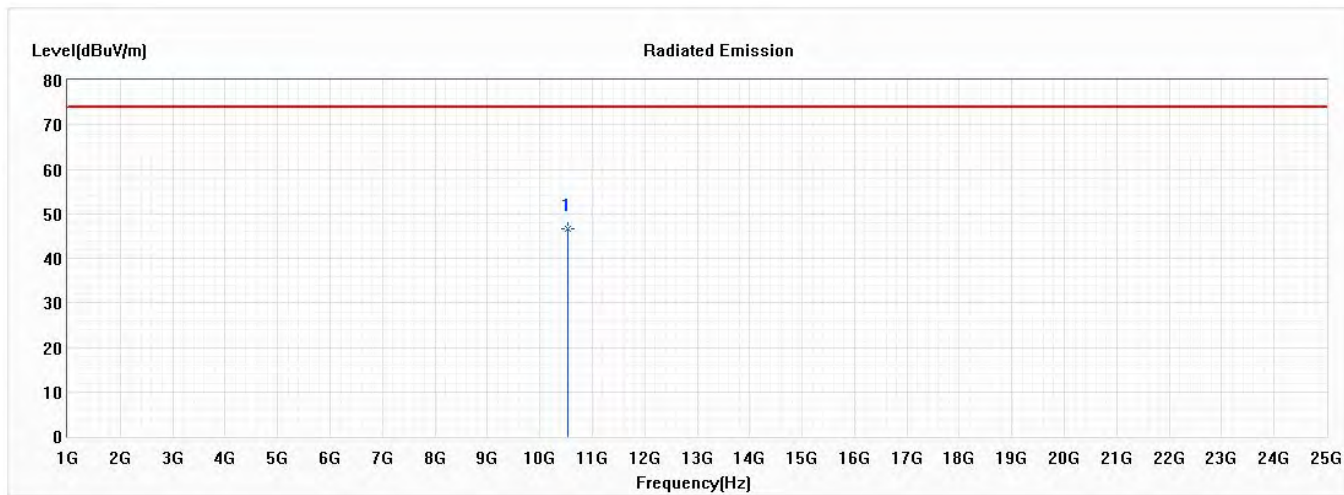


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10540.000 | 46.59 | 74.00 | -27.41 | 56.45 | -9.86 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5270MHz)

Vertical

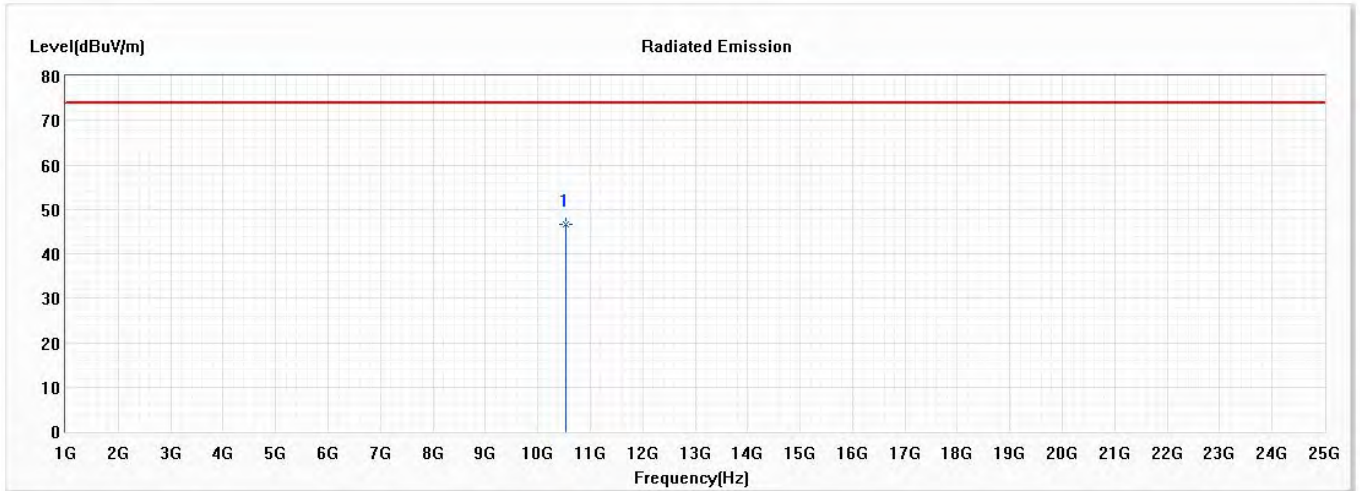


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10540.000 | 46.74 | 74.00 | -27.26 | 56.60 | -9.86 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5310MHz)

Horizontal

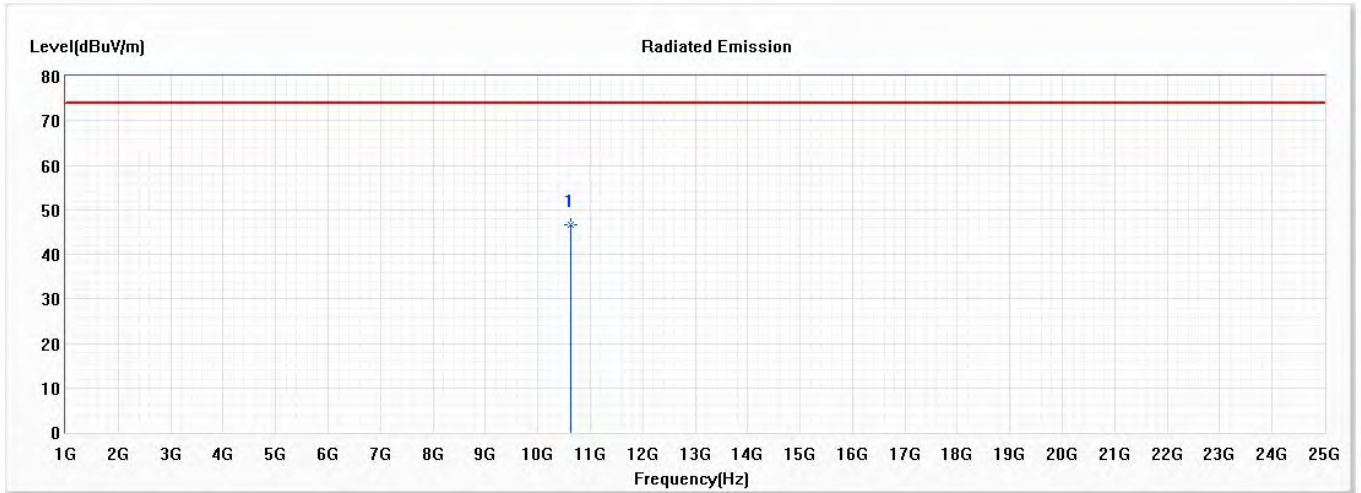


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10620.000 | 46.72 | 74.00 | -27.28 | 56.51 | -9.79 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5310MHz)

Vertical

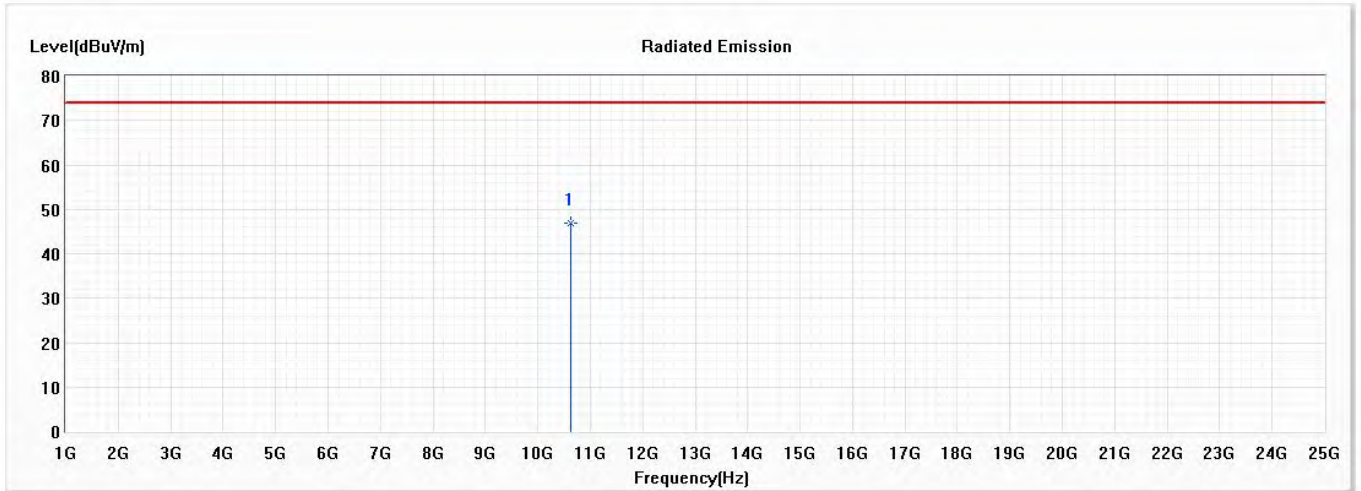


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10620.000 | 46.80 | 74.00 | -27.20 | 56.59 | -9.79 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5510MHz)

Horizontal

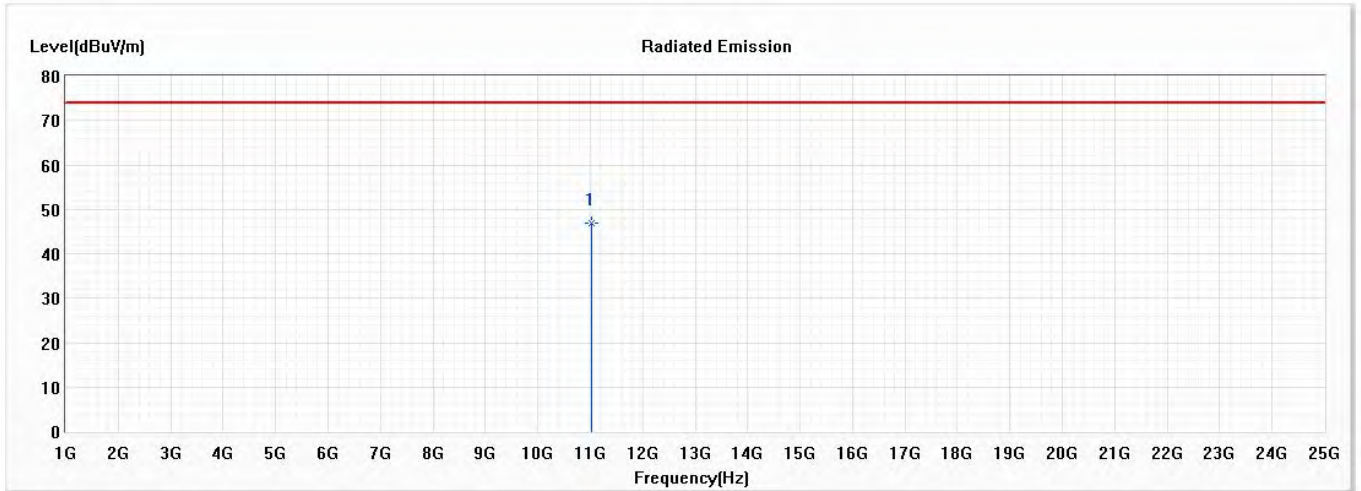


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11020.000 | 46.85 | 74.00 | -27.15 | 56.12 | -9.27 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5510MHz)

Vertical

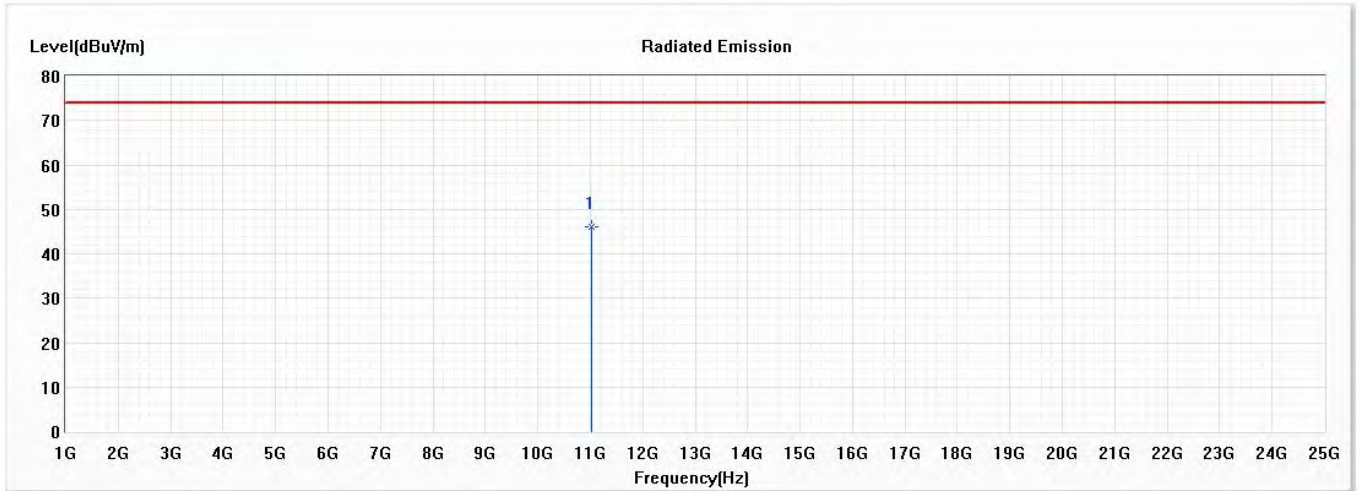


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11020.000 | 46.17 | 74.00 | -27.83 | 55.44 | -9.27 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5550MHz)

Horizontal

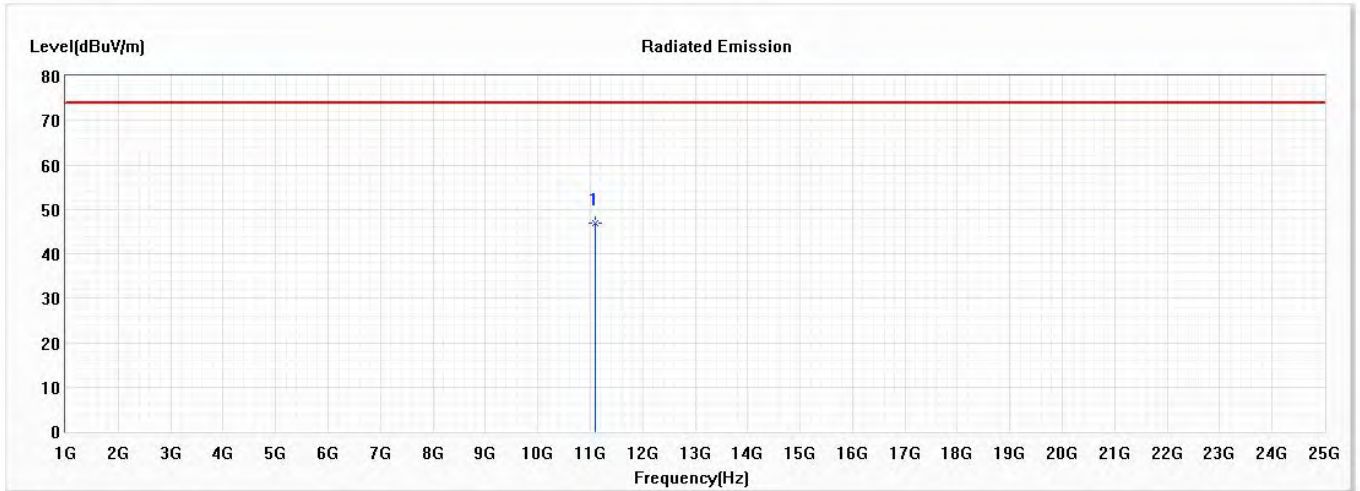


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11100.000 | 46.76 | 74.00 | -27.24 | 55.86 | -9.10 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5550MHz)

Vertical

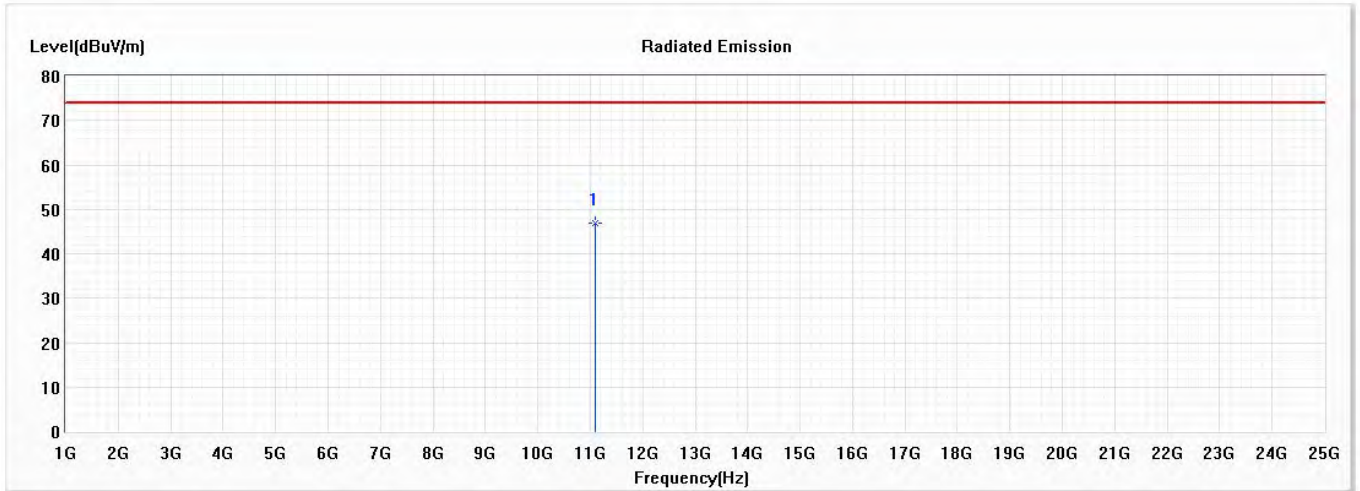


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11100.000 | 46.90 | 74.00 | -27.10 | 56.00 | -9.10 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5670MHz)

Horizontal

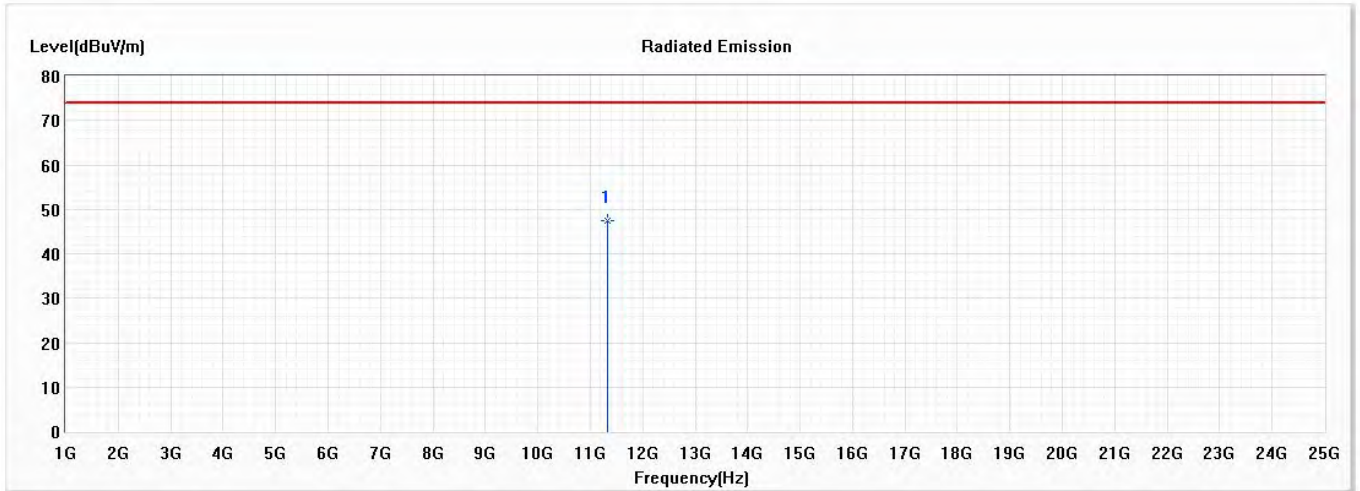


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11340.000 | 47.48 | 74.00 | -26.52 | 56.30 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5670MHz)

Vertical

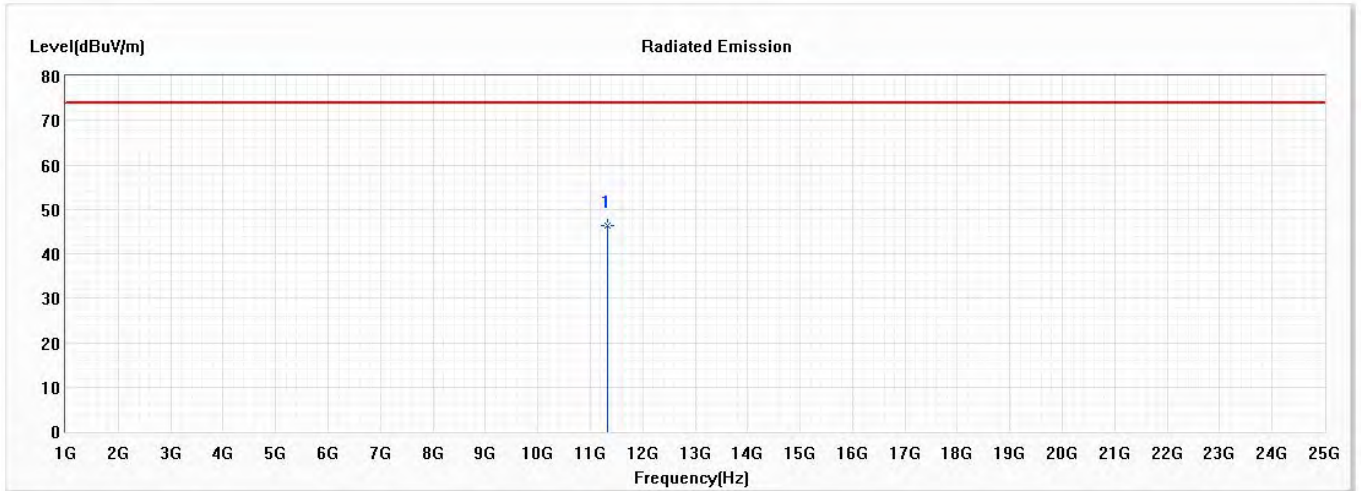


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11340.000 | 46.42 | 74.00 | -27.58 | 55.24 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5710MHz)

Horizontal

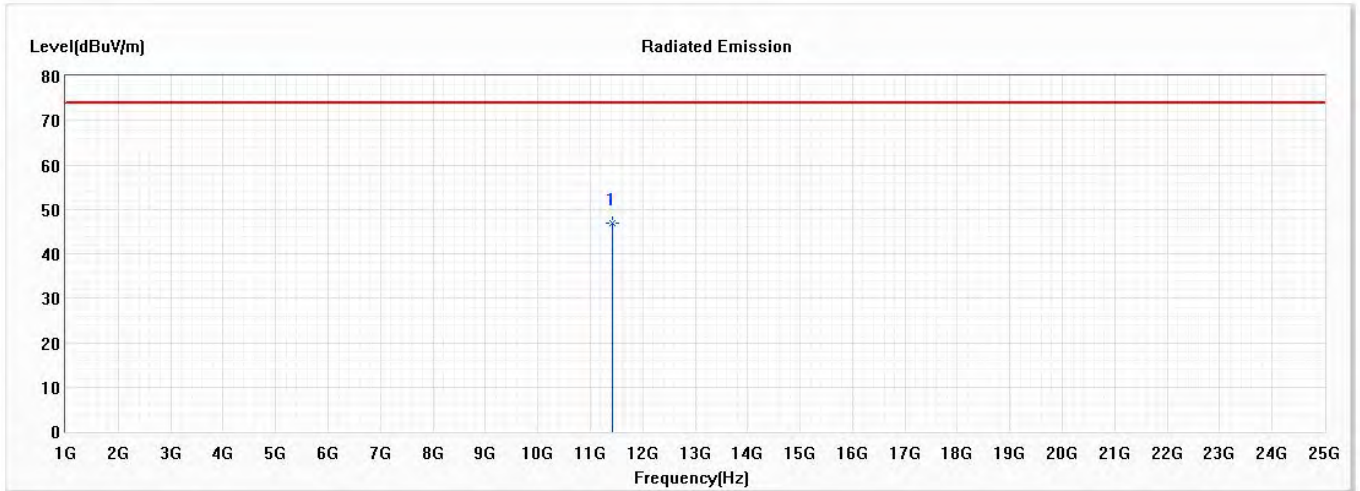


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11420.000 | 46.76 | 74.00 | -27.24 | 55.48 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5710MHz)

Vertical

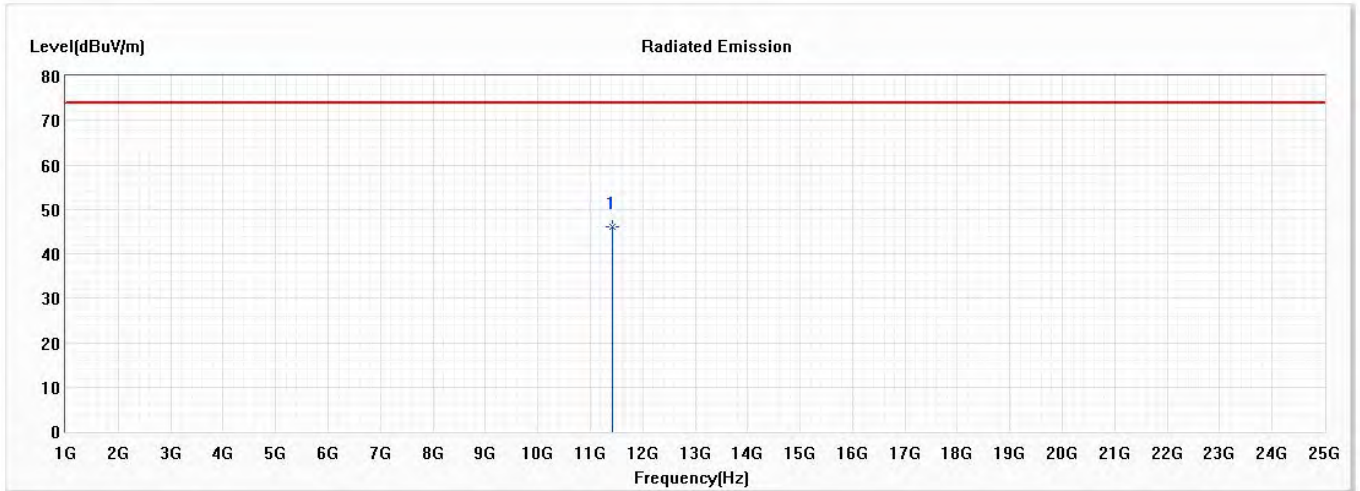


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11420.000 | 46.06 | 74.00 | -27.94 | 54.78 | -8.72 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5755MHz)

Horizontal

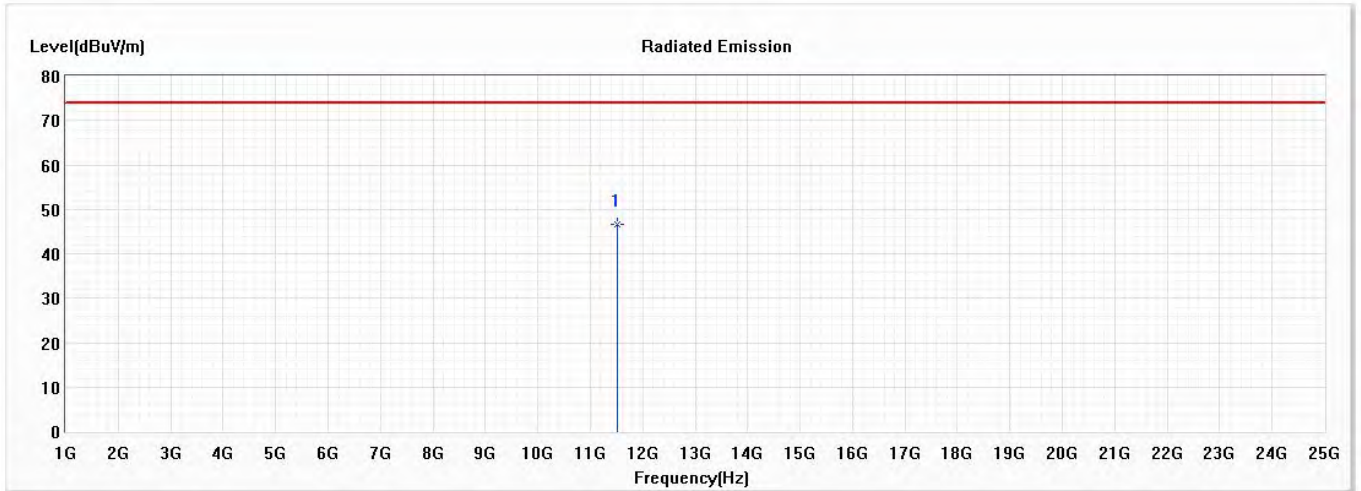


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11510.000 | 46.69 | 74.00 | -27.31 | 55.33 | -8.64 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5755MHz)

Vertical

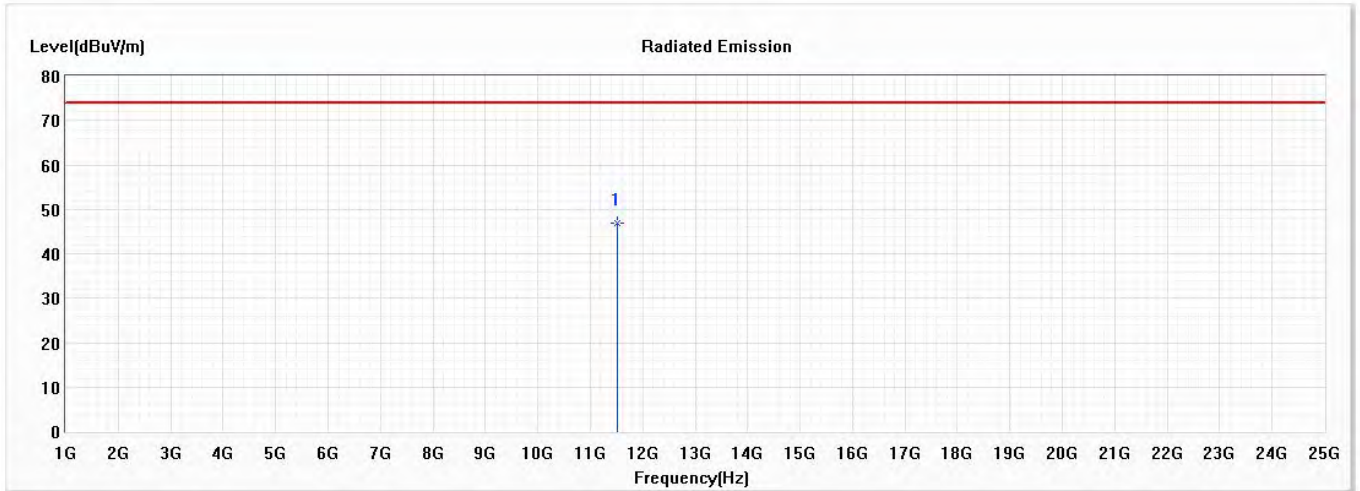


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11510.000 | 46.81 | 74.00 | -27.19 | 55.45 | -8.64 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5795MHz)

Horizontal

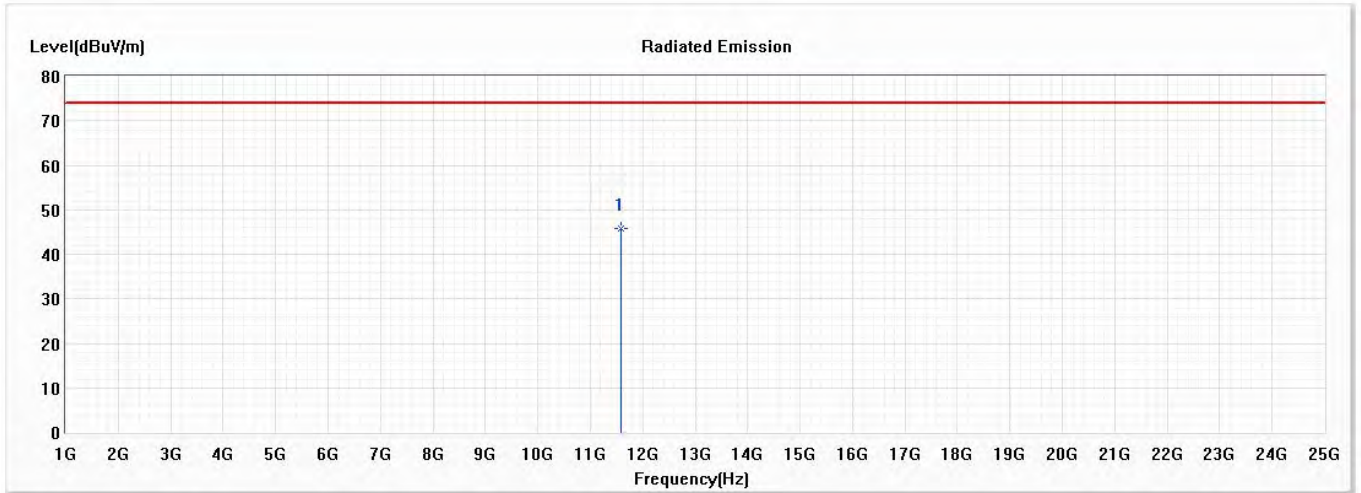


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11590.000 | 45.93 | 74.00 | -28.07 | 54.46 | -8.53 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 24: MIMO Transmit (802.11ax-40BW_34.4Mbps) (5795MHz)

Vertical

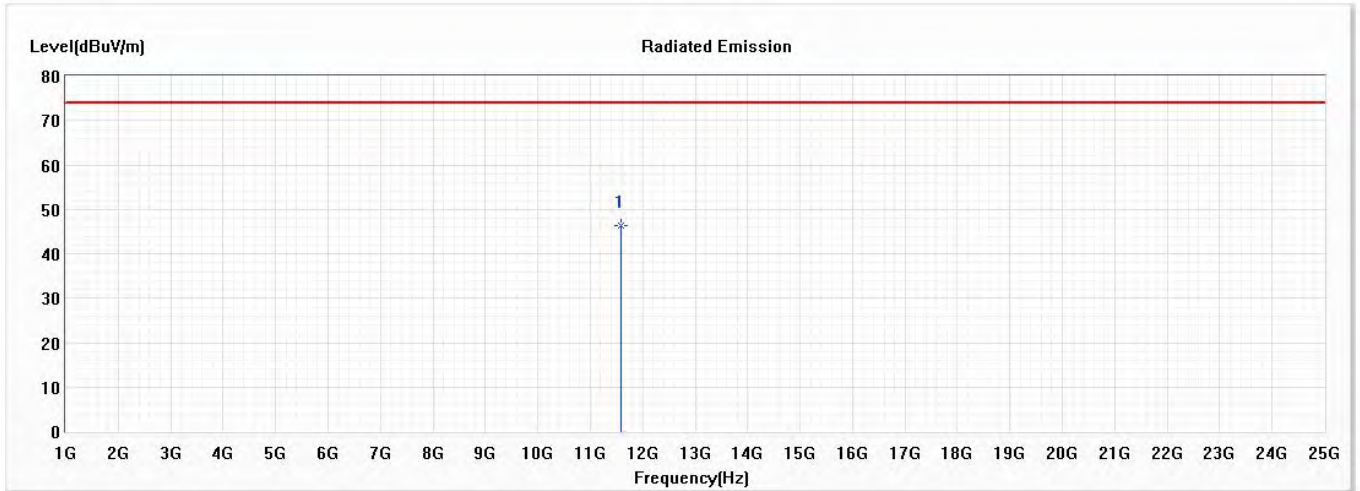


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11590.000 | 46.26 | 74.00 | -27.74 | 54.79 | -8.53 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5210MHz)

Horizontal

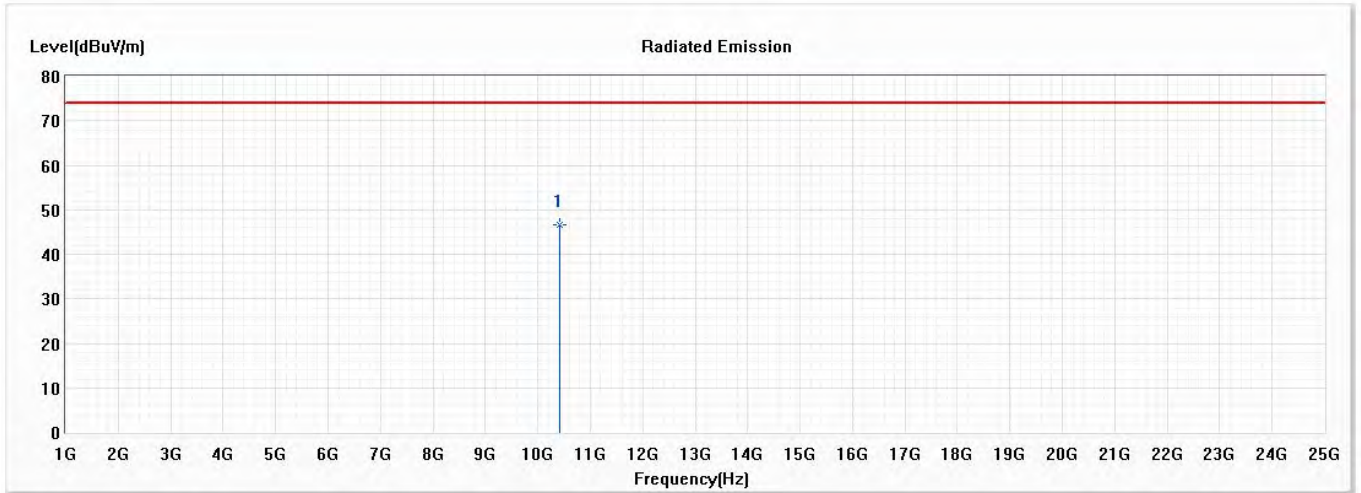


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10420.000 | 46.56 | 74.00 | -27.44 | 56.70 | -10.14 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5210MHz)

Vertical

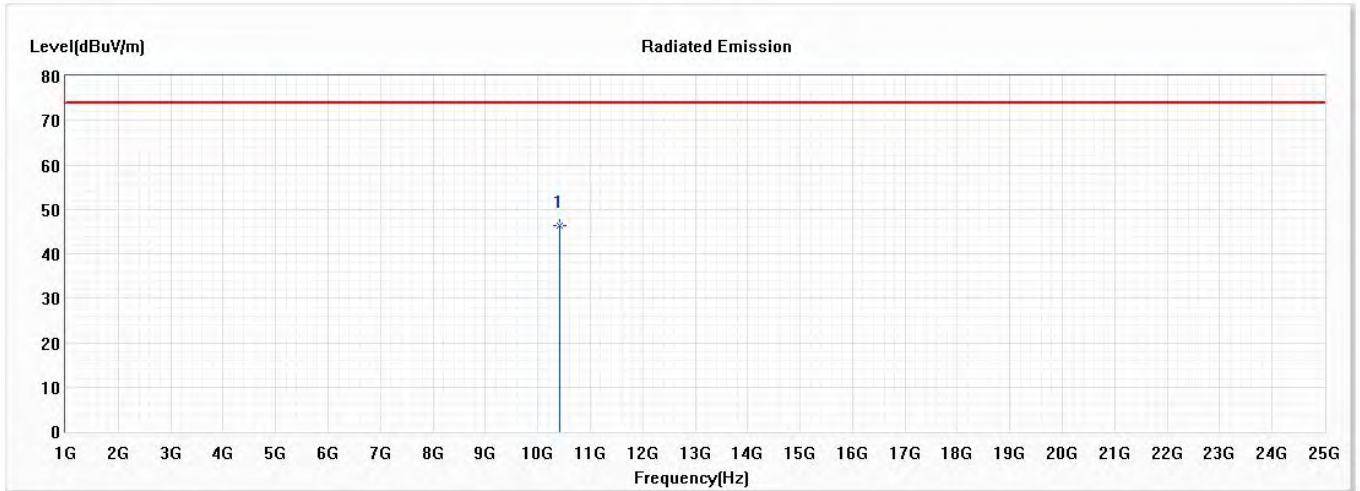


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10420.000 | 46.38 | 74.00 | -27.62 | 56.52 | -10.14 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5290MHz)

Horizontal

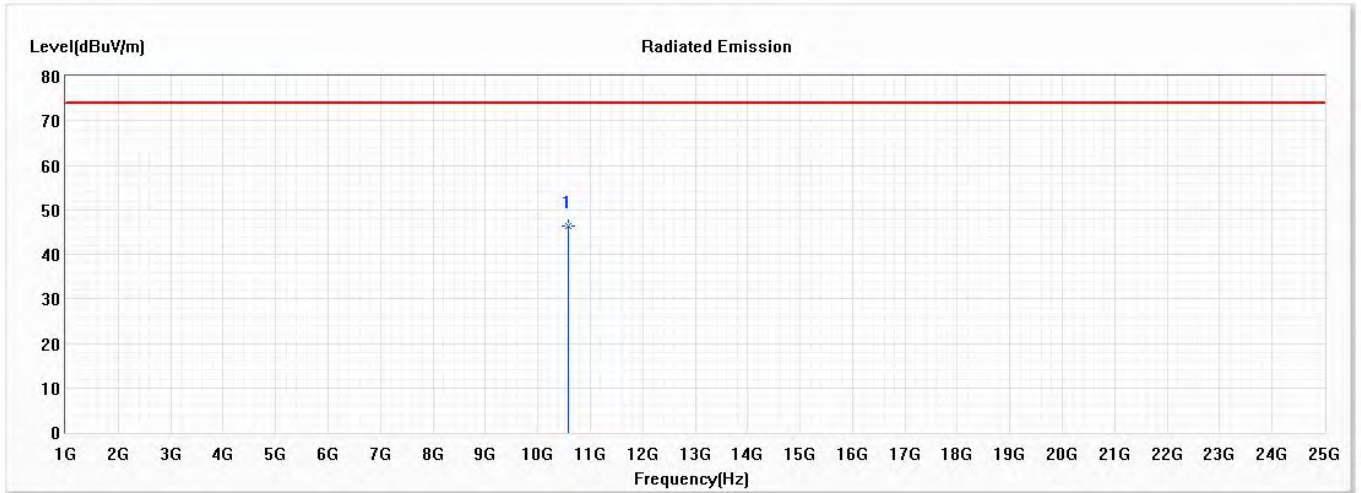


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10580.000 | 46.37 | 74.00 | -27.63 | 56.20 | -9.83 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5290MHz)

Vertical

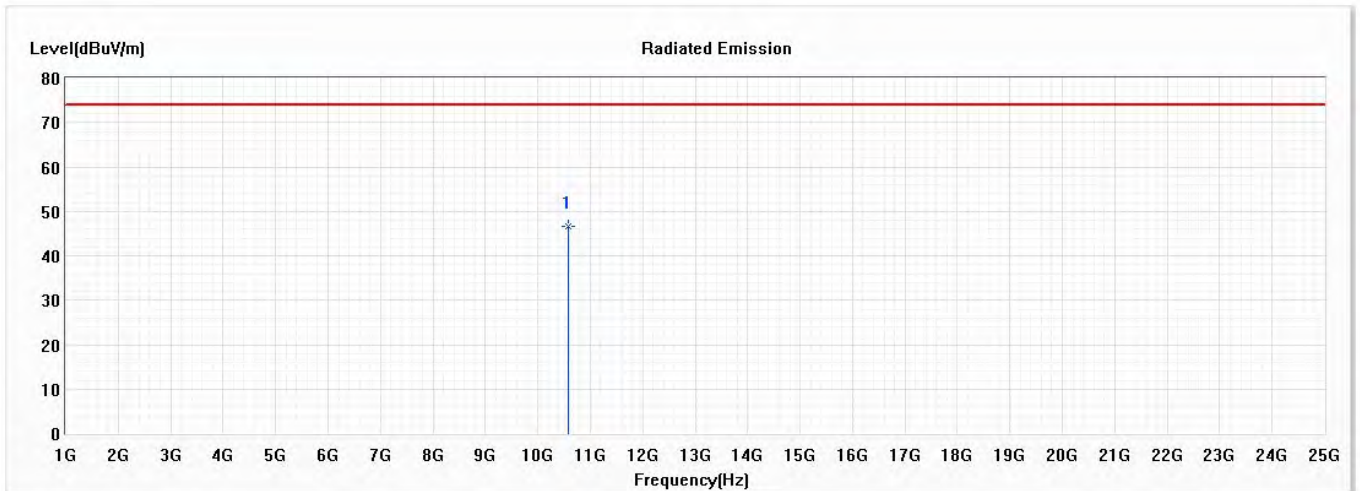


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10580.000 | 46.61 | 74.00 | -27.39 | 56.44 | -9.83 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5530MHz)

Horizontal

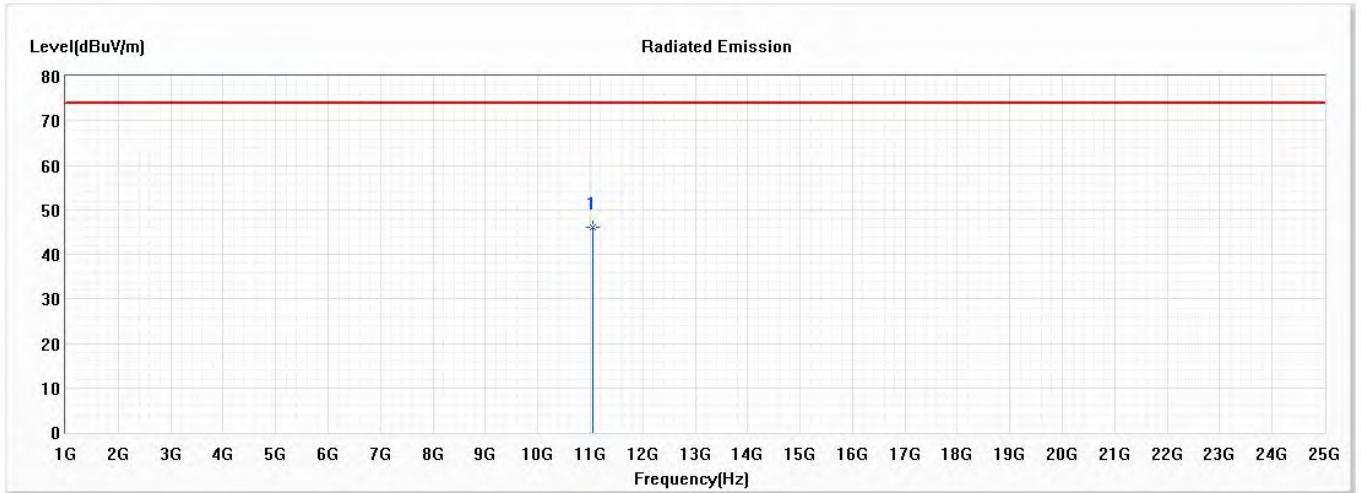


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11060.000 | 46.20 | 74.00 | -27.80 | 55.36 | -9.16 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5530MHz)

Vertical

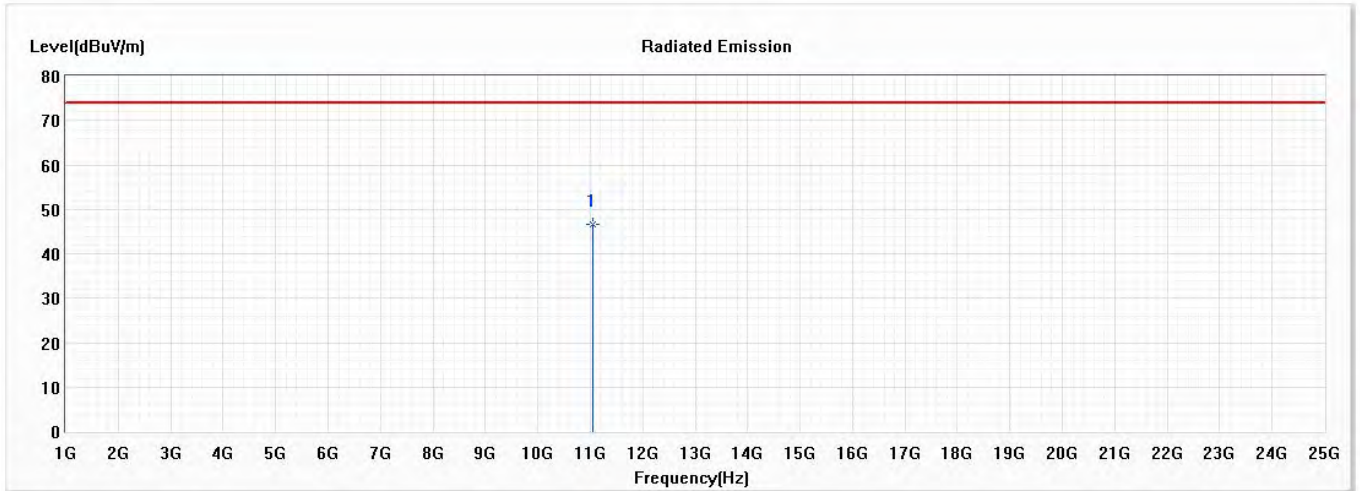


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11060.000 | 46.59 | 74.00 | -27.41 | 55.75 | -9.16 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5610MHz)

Horizontal

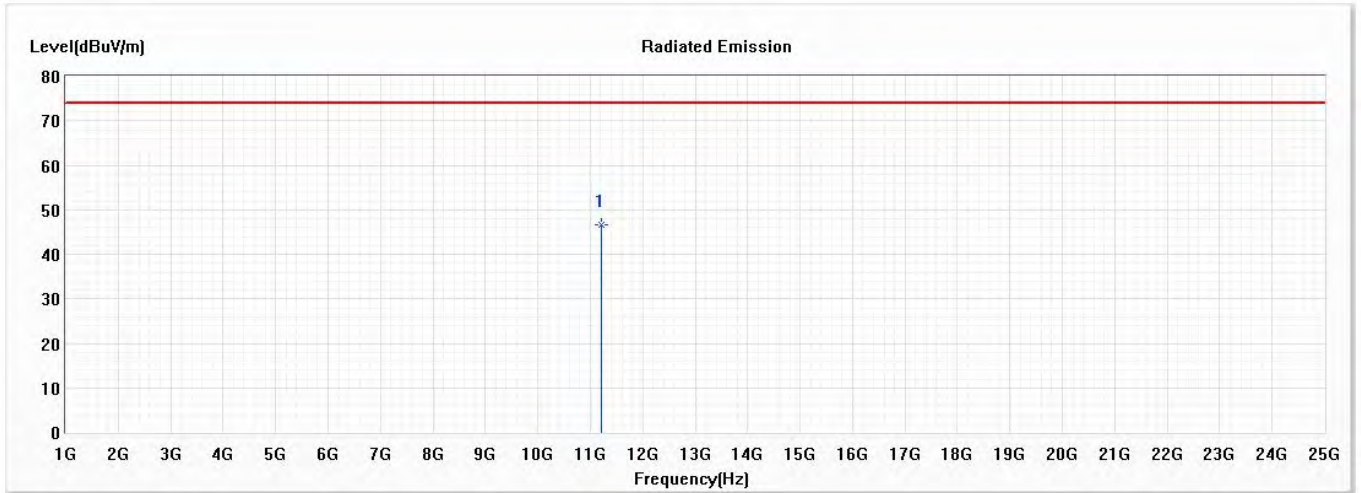


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11220.000 | 46.56 | 74.00 | -27.44 | 55.54 | -8.98 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5610MHz)

Vertical

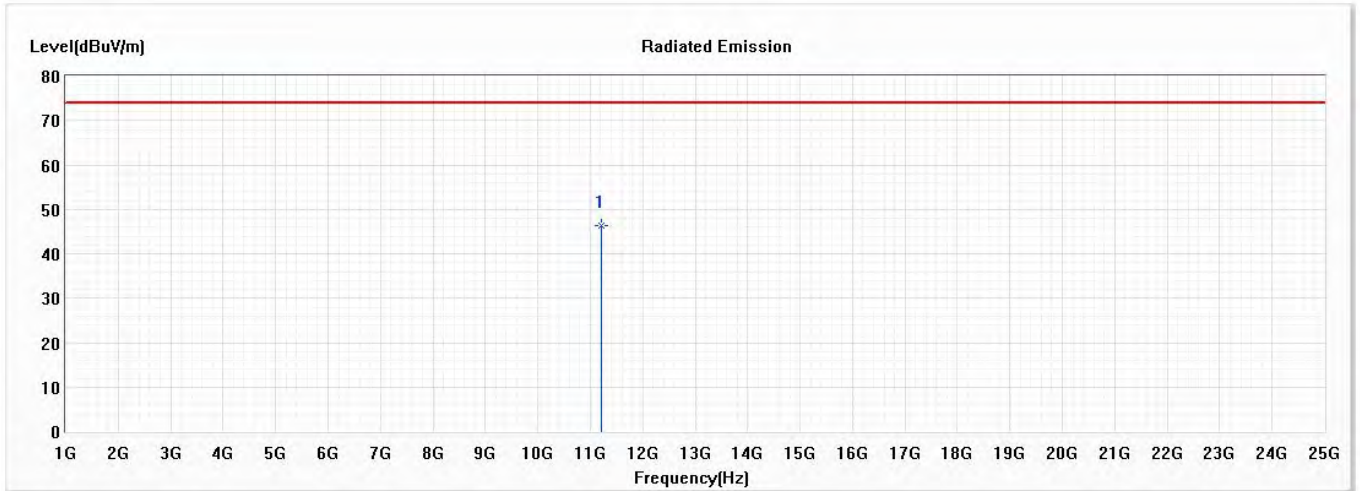


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11220.000 | 46.46 | 74.00 | -27.54 | 55.44 | -8.98 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5690MHz)

Horizontal

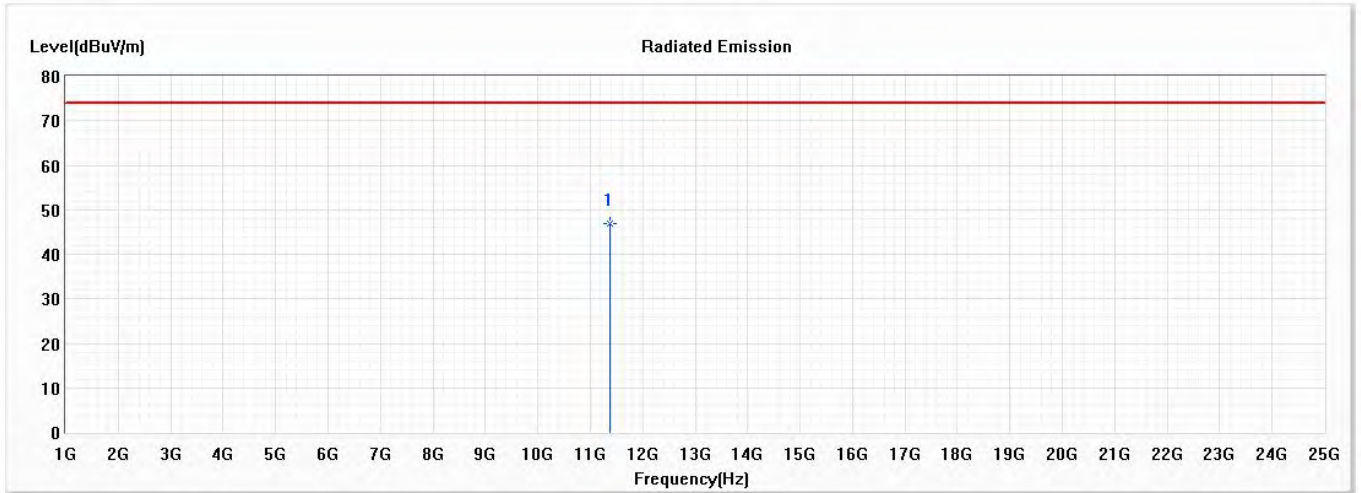


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11380.000 | 46.89 | 74.00 | -27.11 | 55.71 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5690MHz)

Vertical

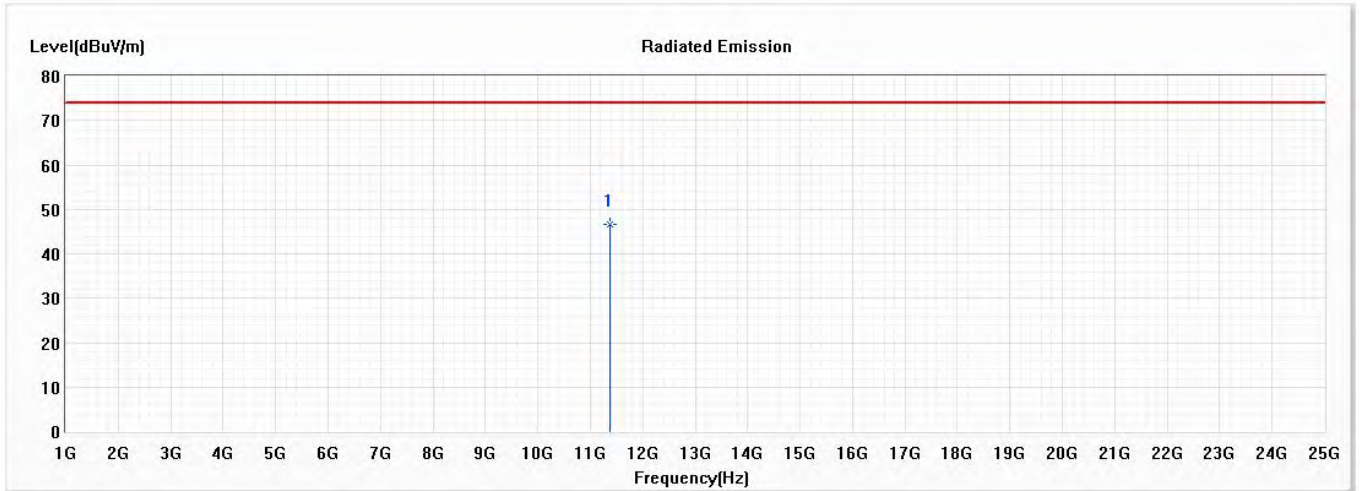


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11380.000 | 46.61 | 74.00 | -27.39 | 55.43 | -8.82 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5775MHz)

Horizontal

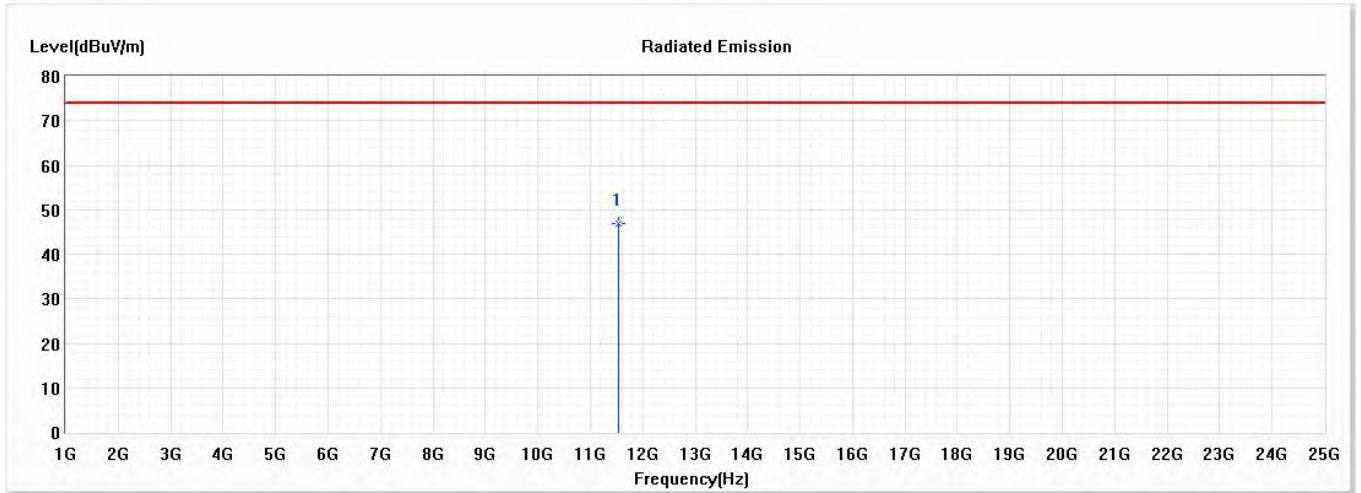


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11550.000 | 46.86 | 74.00 | -27.14 | 55.47 | -8.61 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 25: MIMO Transmit (802.11ax-80BW_72.1Mbps) (5775MHz)

Vertical

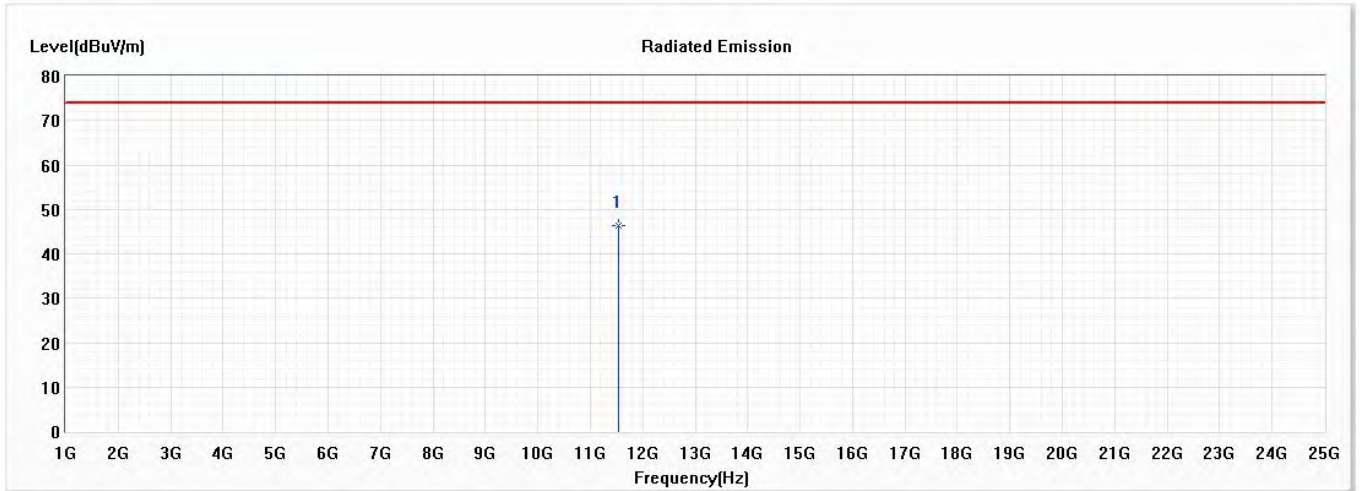


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11550.000 | 46.44 | 74.00 | -27.56 | 55.05 | -8.61 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 26: MIMO Transmit (802.11ax-160BW_144.1Mbps) (5250MHz)

Horizontal

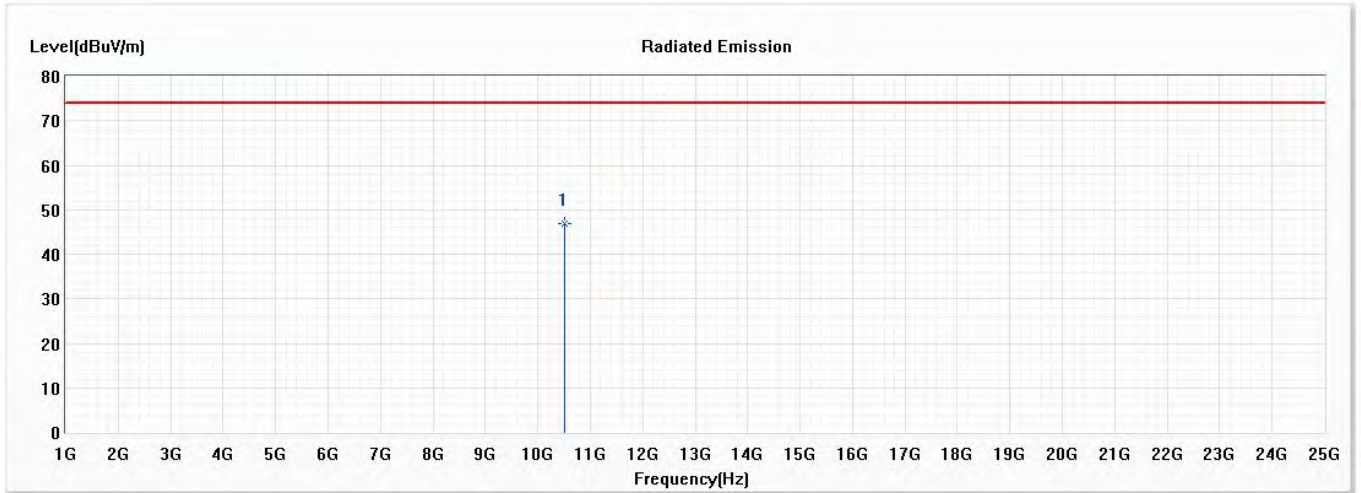


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10500.000 | 46.92 | 74.00 | -27.08 | 56.84 | -9.92 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 26: MIMO Transmit (802.11ax-160BW_144.1Mbps) (5250MHz)

Vertical

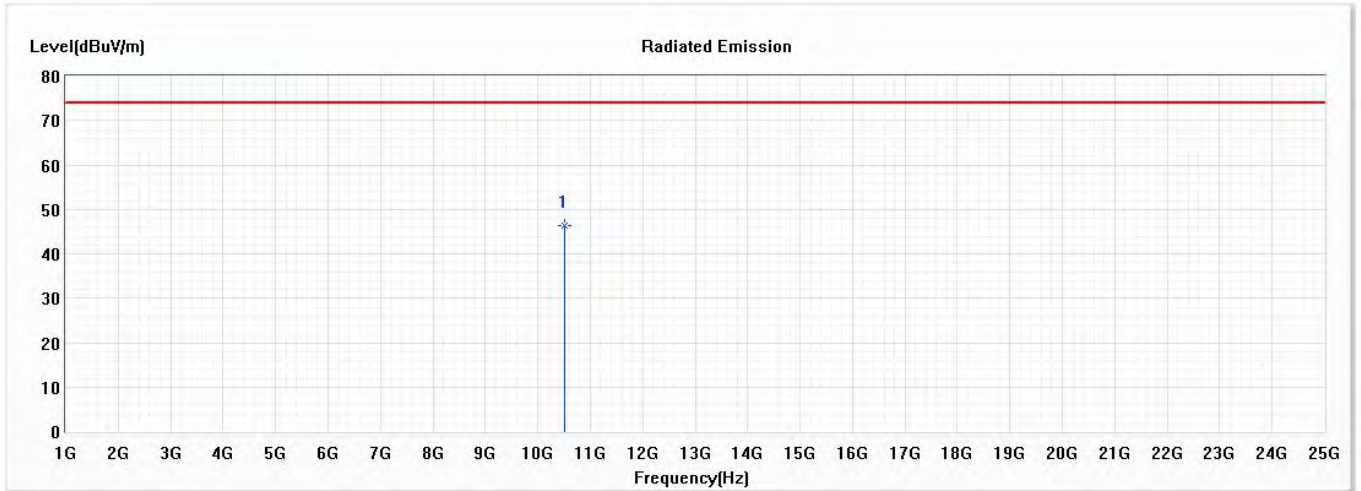


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 10500.000 | 46.43 | 74.00 | -27.57 | 56.35 | -9.92 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 26: MIMO Transmit (802.11ax-160BW_144.1Mbps) (5570MHz)

Horizontal

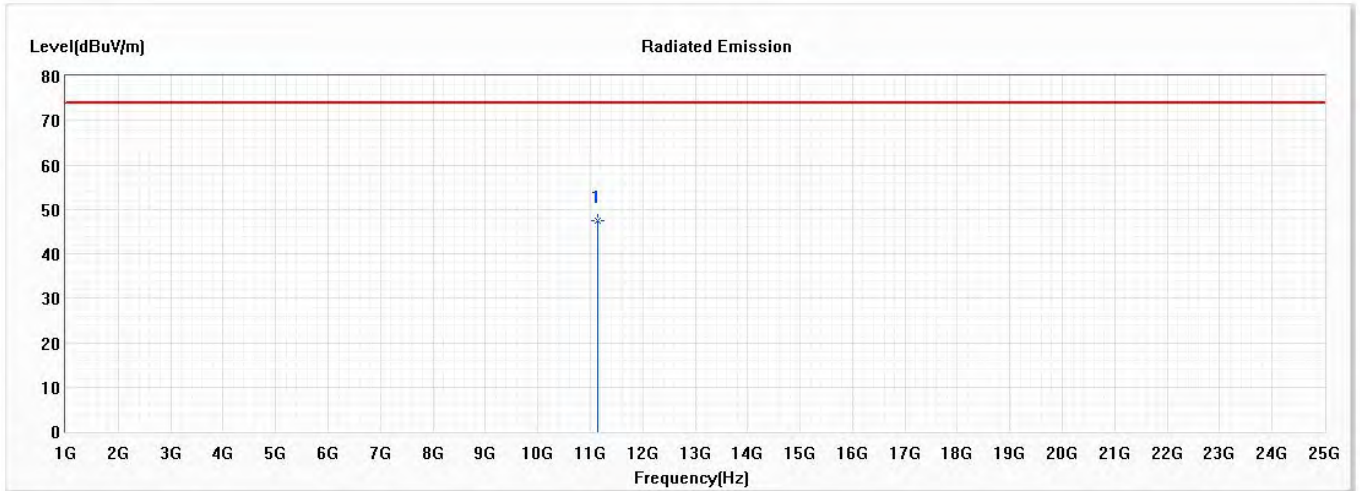


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11140.000 | 47.42 | 74.00 | -26.58 | 56.50 | -9.08 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2020/12/07
 Test Mode : Mode 26: MIMO Transmit (802.11ax-160BW_144.1Mbps) (5570MHz)

Vertical

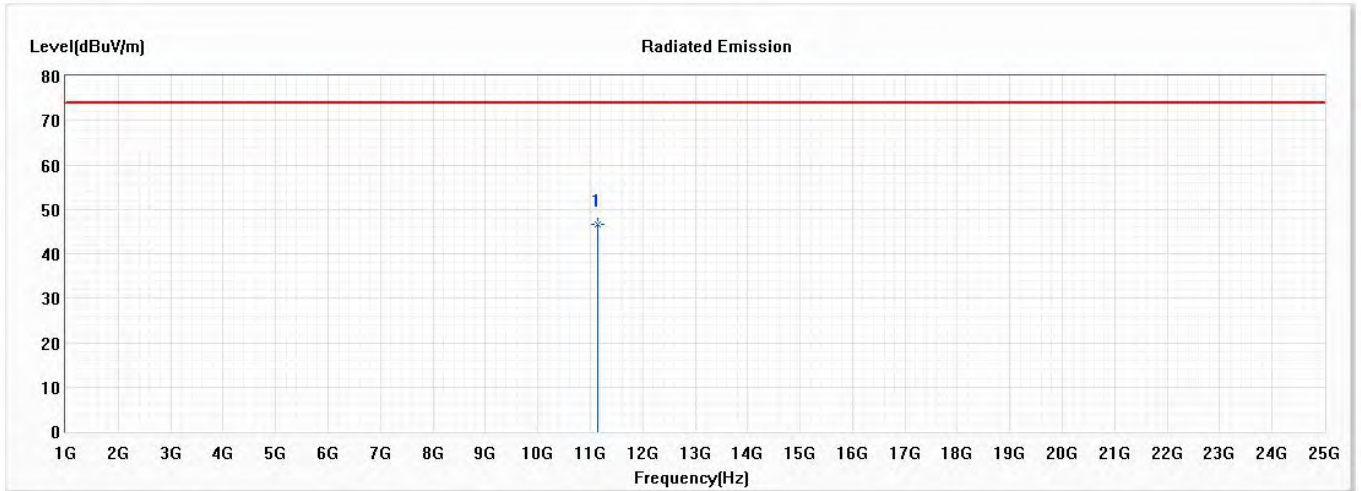


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 11140.000 | 46.56 | 74.00 | -27.44 | 55.64 | -9.08 | PK |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook Computers
 Test Item : General Radiated Emission
 Test Date : 2020/12/04
 Test Mode : Mode 8: SISO A Transmit (802.11ax-160W_72.1Mbps) (5570MHz)

Horizontal

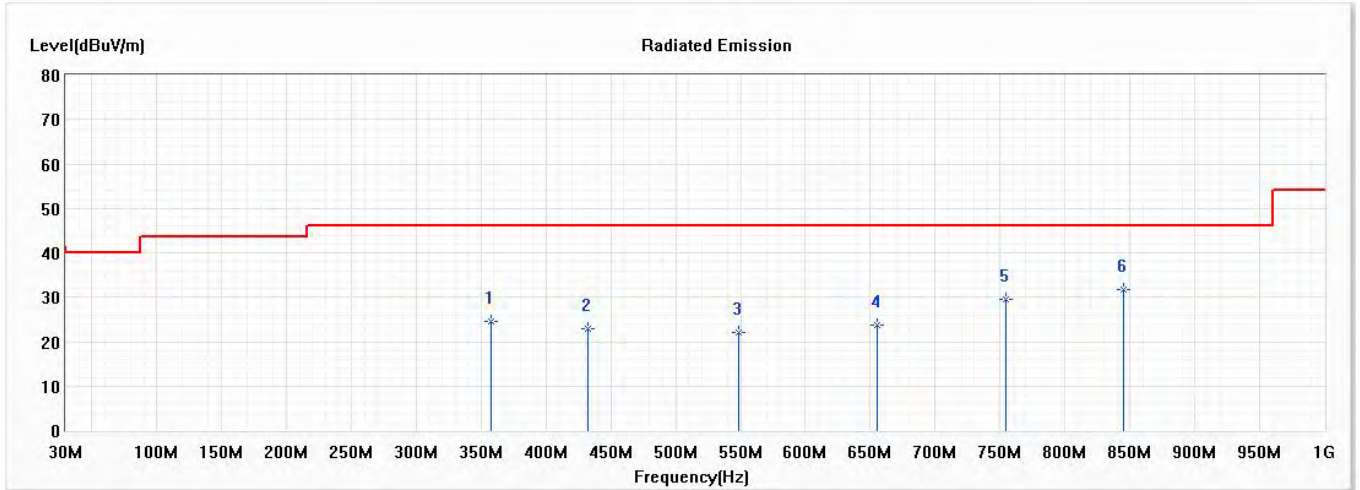


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 357.860 | 24.48 | 46.00 | -21.52 | 32.57 | -8.09 | QP |
| 2 | 432.550 | 22.77 | 46.00 | -23.23 | 29.18 | -6.41 | QP |
| 3 | 548.950 | 22.17 | 46.00 | -23.83 | 26.37 | -4.20 | QP |
| 4 | 655.650 | 23.86 | 46.00 | -22.14 | 26.19 | -2.33 | QP |
| 5 | 754.590 | 29.46 | 46.00 | -16.54 | 30.14 | -0.68 | QP |
| * 6 | 844.800 | 31.60 | 46.00 | -14.40 | 31.36 | 0.24 | QP |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.
6. Each mode through the pretest, only the worst case is shown in the report.

Product : Notebook Computers
 Test Item : General Radiated Emission
 Test Date : 2020/12/04
 Test Mode : Mode 8: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Vertical

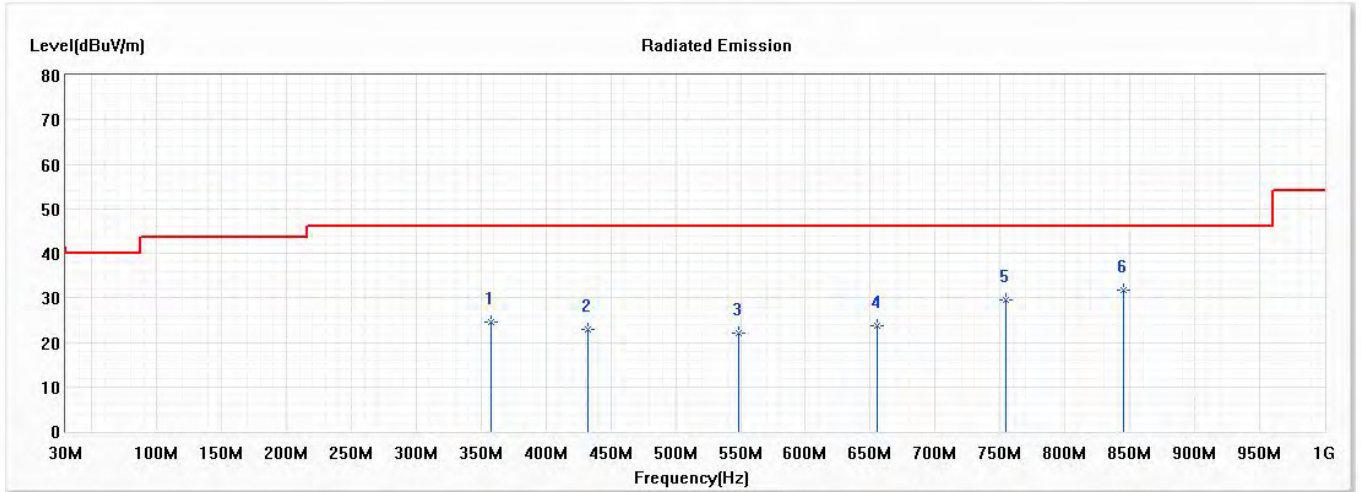


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 357.860 | 24.48 | 46.00 | -21.52 | 32.57 | -8.09 | QP |
| 2 | 432.550 | 22.77 | 46.00 | -23.23 | 29.18 | -6.41 | QP |
| 3 | 548.950 | 22.17 | 46.00 | -23.83 | 26.37 | -4.20 | QP |
| 4 | 655.650 | 23.86 | 46.00 | -22.14 | 26.19 | -2.33 | QP |
| 5 | 754.590 | 29.46 | 46.00 | -16.54 | 30.14 | -0.68 | QP |
| * 6 | 844.800 | 31.60 | 46.00 | -14.40 | 31.36 | 0.24 | QP |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.
6. Each mode through the pretest, only the worst case is shown in the report.

Product : Notebook Computers
 Test Item : General Radiated Emission
 Test Date : 2020/12/04
 Test Mode : Mode 18: SISO B Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Horizontal

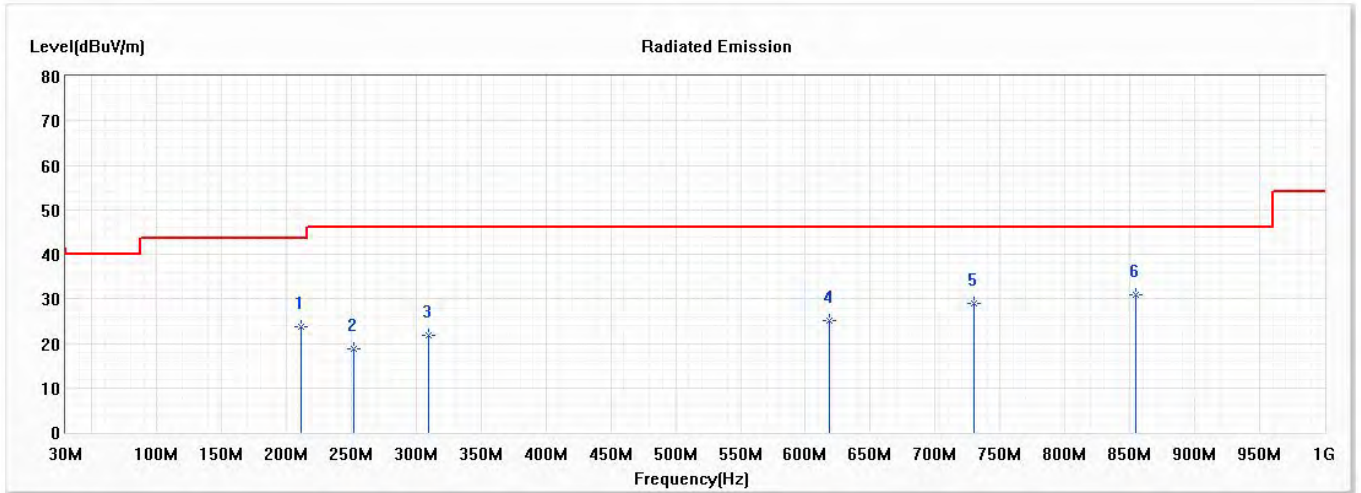


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 211.390 | 23.60 | 43.50 | -19.90 | 36.19 | -12.59 | QP |
| 2 | 252.130 | 18.64 | 46.00 | -27.36 | 29.89 | -11.25 | QP |
| 3 | 309.360 | 21.73 | 46.00 | -24.27 | 30.95 | -9.22 | QP |
| 4 | 618.790 | 25.02 | 46.00 | -20.98 | 27.77 | -2.75 | QP |
| 5 | 730.340 | 29.09 | 46.00 | -16.91 | 30.30 | -1.21 | QP |
| * 6 | 854.500 | 30.99 | 46.00 | -15.01 | 30.54 | 0.45 | QP |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.
6. Each mode through the pretest, only the worst case is shown in the report.

Product : Notebook Computers
 Test Item : General Radiated Emission
 Test Date : 2020/12/04
 Test Mode : Mode 18: SISO B Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Vertical

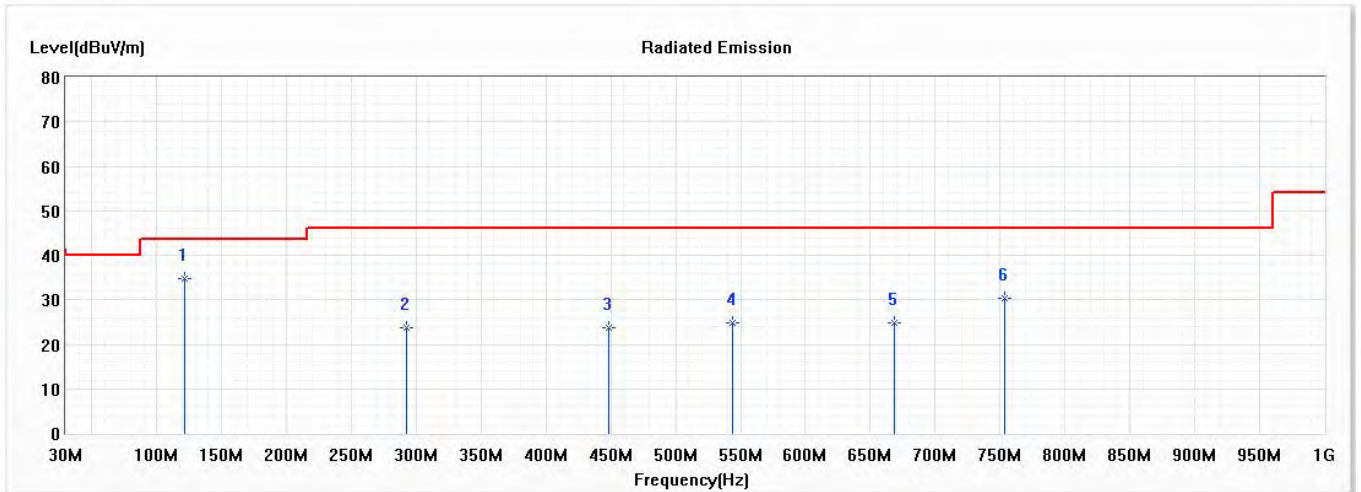


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 121.180 | 34.74 | 43.50 | -8.76 | 48.11 | -13.37 | QP |
| 2 | 292.870 | 23.77 | 46.00 | -22.23 | 33.53 | -9.76 | QP |
| 3 | 448.070 | 23.70 | 46.00 | -22.30 | 29.68 | -5.98 | QP |
| 4 | 544.100 | 24.92 | 46.00 | -21.08 | 29.13 | -4.21 | QP |
| 5 | 668.260 | 24.84 | 46.00 | -21.16 | 27.15 | -2.31 | QP |
| 6 | 753.620 | 30.48 | 46.00 | -15.52 | 31.21 | -0.73 | QP |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.
6. Each mode through the pretest, only the worst case is shown in the report.

Product : Notebook Computers
 Test Item : General Radiated Emission
 Test Date : 2020/12/04
 Test Mode : Mode 26: MIMO Transmit (802.11ax-160BW_144.1Mbps) (5250MHz)

Horizontal

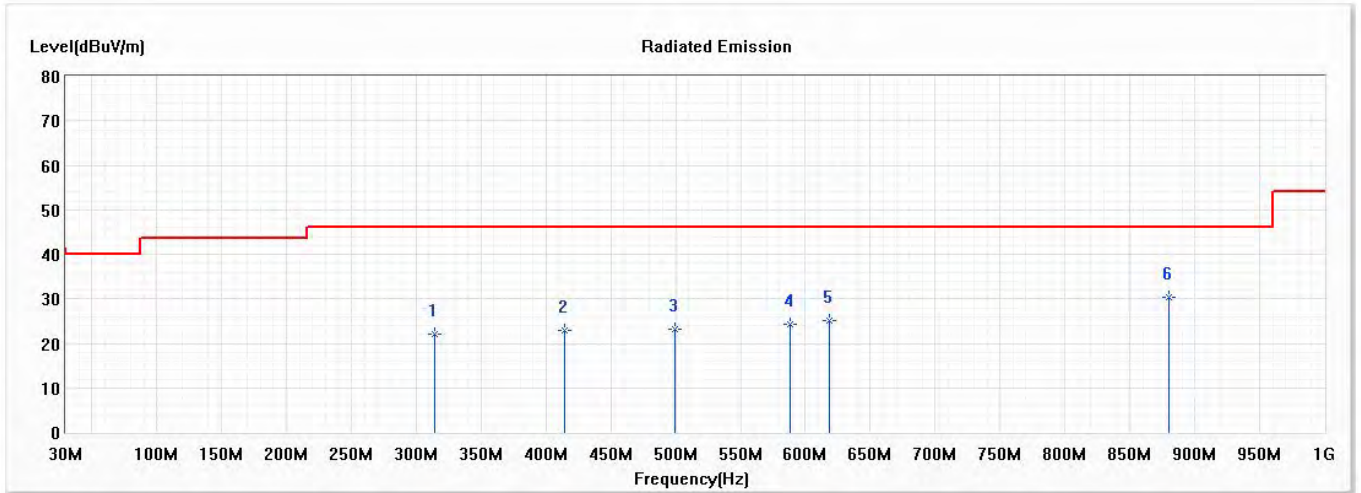


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 314.210 | 21.94 | 46.00 | -24.06 | 30.96 | -9.02 | QP |
| 2 | 414.120 | 22.83 | 46.00 | -23.17 | 29.75 | -6.92 | QP |
| 3 | 499.480 | 23.06 | 46.00 | -22.94 | 27.99 | -4.93 | QP |
| 4 | 587.750 | 24.39 | 46.00 | -21.61 | 27.70 | -3.31 | QP |
| 5 | 618.790 | 25.02 | 46.00 | -20.98 | 27.77 | -2.75 | QP |
| * 6 | 880.320 | 30.29 | 46.00 | -15.71 | 29.79 | 0.50 | QP |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.
6. Each mode through the pretest, only the worst case is shown in the report.

Product : Notebook Computers
 Test Item : General Radiated Emission
 Test Date : 2020/12/04
 Test Mode : Mode 26: MIMO Transmit (802.11ax-160BW_144.1Mbps) (5250MHz)

Vertical

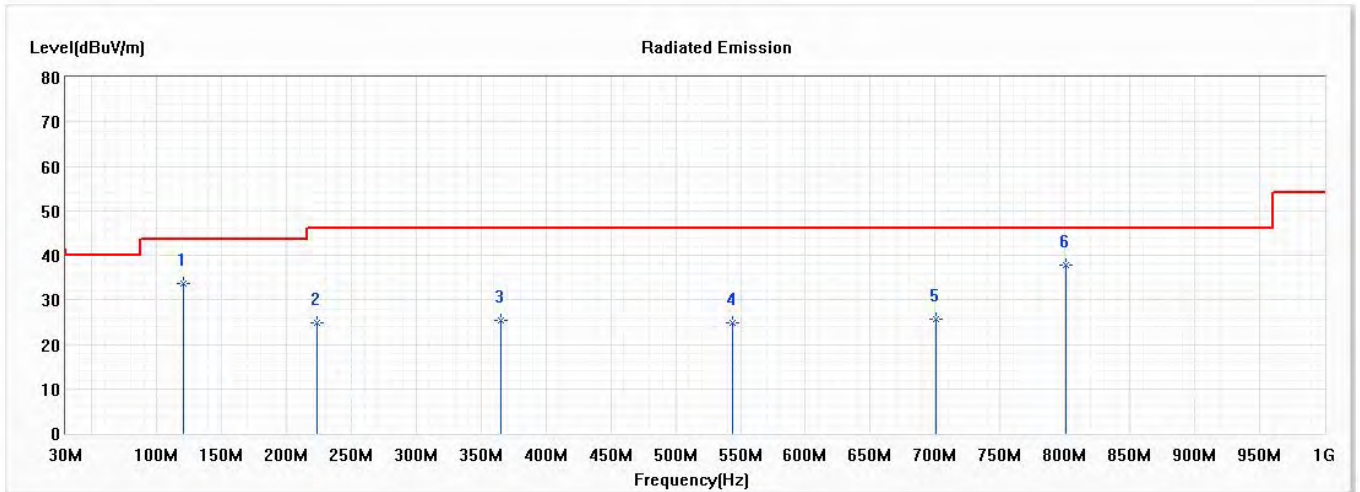

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 120.210 | 33.58 | 43.50 | -9.92 | 47.06 | -13.48 | QP |
| 2 | 224.000 | 24.92 | 46.00 | -21.08 | 37.29 | -12.37 | QP |
| 3 | 365.620 | 25.45 | 46.00 | -20.55 | 33.30 | -7.85 | QP |
| 4 | 544.100 | 24.92 | 46.00 | -21.08 | 29.13 | -4.21 | QP |
| 5 | 700.270 | 25.64 | 46.00 | -20.36 | 27.41 | -1.77 | QP |
| * 6 | 801.150 | 37.68 | 46.00 | -8.32 | 38.23 | -0.55 | QP |


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.
6. Each mode through the pretest, only the worst case is shown in the report.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement:

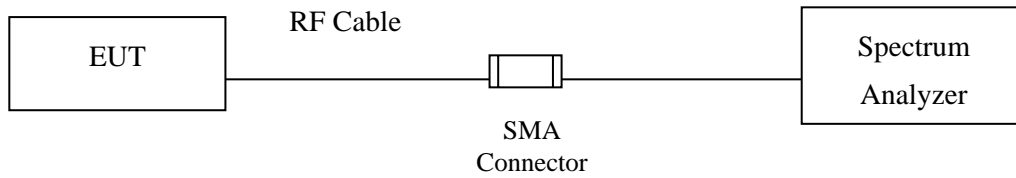

RF Radiated Measurement:

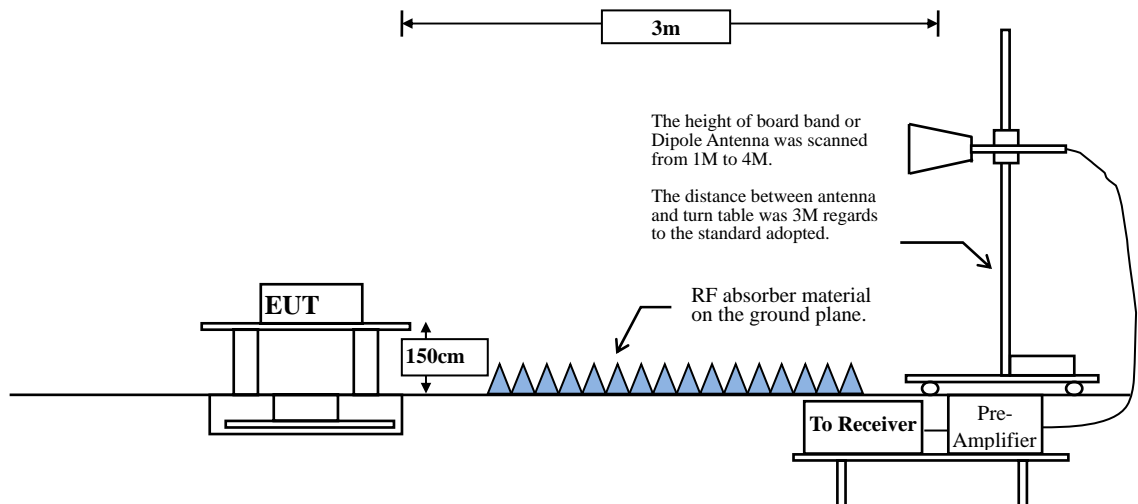

6.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

| FCC Part 15 Subpart C Paragraph 15.209 Limits | | |
|--|----------|-----------|
| Frequency MHz | uV/m @3m | dBµV/m@3m |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

- Remarks :
1. RF Voltage (dBµV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW \geq 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

SISO A

| 5GHz band | Duty Cycle (%) | T (ms) | 1/T (Hz) | VBW (Hz) |
|------------------------|----------------|---------|----------|----------|
| 802.11 a | 88.98 | 2.0899 | 478 | 500 |
| 802.11 ax20 | 98.84 | 24.7826 | 40 | 10 |
| 802.11 ax40 | 98.47 | 18.6232 | 54 | 10 |
| 802.11 ax80 | 97.86 | 16.5942 | 60 | 100 |
| 802.11 ax160 | 94.51 | 4.4928 | 223 | 500 |
| 802.11 ax20-26/0-RU | 93.94 | 5.3949 | 185 | 500 |
| 802.11 ax20-52/37-RU | 94.42 | 5.3949 | 185 | 500 |
| 802.11 ax20-106/53-RU | 94.42 | 5.3949 | 185 | 500 |
| 802.11 ax40-242-61-RU | 94.93 | 5.4239 | 184 | 500 |
| 802.11 ax80-484-65-RU | 93.94 | 5.3949 | 185 | 500 |
| 802.11 ax160-996-67-RU | 94.69 | 5.4348 | 184 | 500 |

Note: Duty Cycle Refer to Section 8.

MIMO


| 5GHz band | Duty Cycle (%) | T (ms) | 1/T (Hz) | VBW (Hz) |
|------------------------|----------------|---------|----------|----------|
| 802.11 n20 | 98.31 | 18.5110 | 54 | 10 |
| 802.11 n40 | 96.23 | 8.8732 | 113 | 500 |
| 802.11 ac80 | 94.48 | 5.4529 | 183 | 500 |
| 802.11 ac160 | 89.44 | 2.6993 | 370 | 500 |
| 802.11 ax20 | 98.36 | 18.6899 | 54 | 10 |
| 802.11 ax40 | 96.62 | 9.3116 | 107 | 500 |
| 802.11 ax80 | 93.18 | 4.4565 | 224 | 500 |
| 802.11 ax160 | 89.71 | 2.2754 | 439 | 500 |
| 802.11 ax20-26/0-RU | 94.70 | 5.4348 | 184 | 500 |
| 802.11 ax20-52/37-RU | 94.70 | 5.4348 | 184 | 500 |
| 802.11 ax20-106/53-RU | 94.68 | 5.4130 | 185 | 500 |
| 802.11 ax40-242-61-RU | 94.68 | 5.4130 | 185 | 500 |
| 802.11 ax80-484-65-RU | 94.34 | 5.4348 | 184 | 500 |
| 802.11 ax160-996-67-RU | 94.32 | 5.4130 | 185 | 500 |

Note: Duty Cycle Refer to Section 8.

6.4. Test Result of Band Edge


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5180MHz)

Peak:

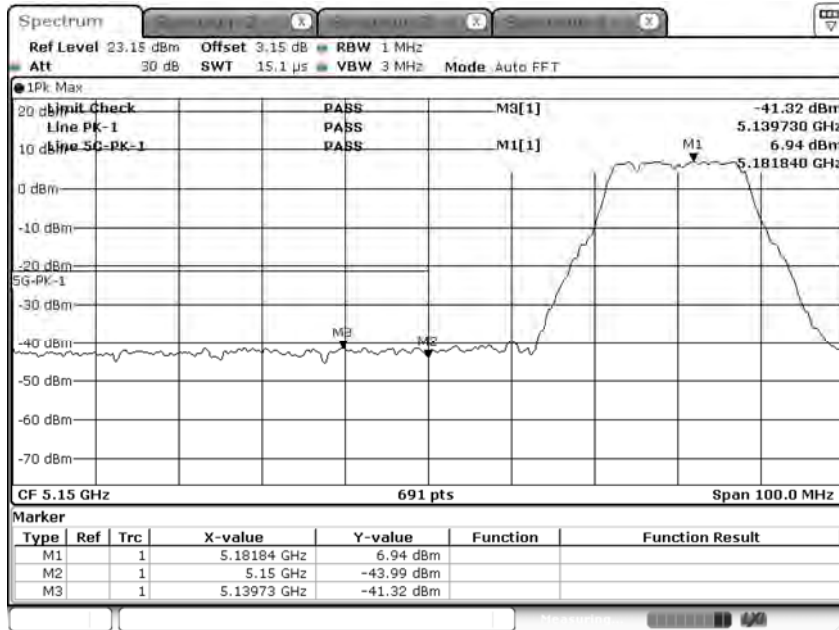

Date: 25.NOV.2020 03:27:45


Average:

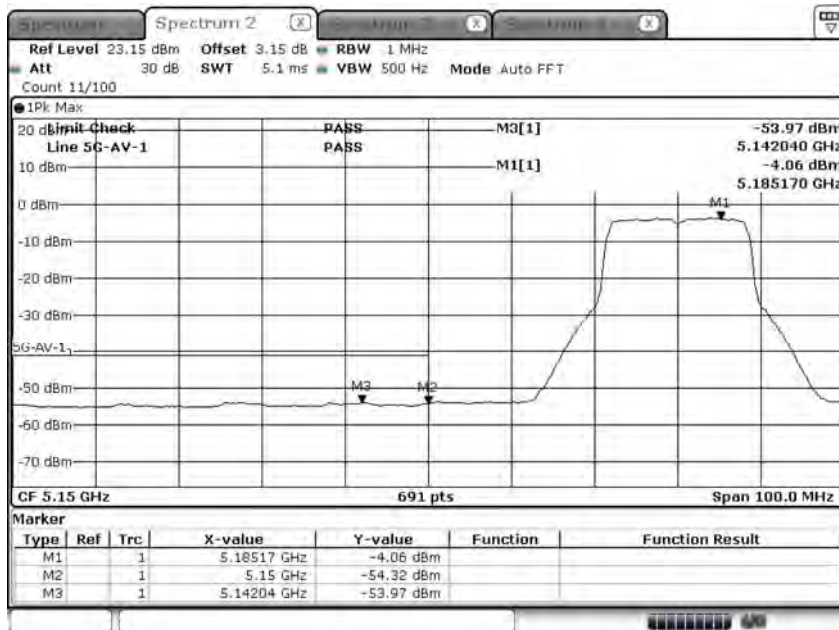

Date: 25.NOV.2020 03:28:26


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5320MHz)

Peak:

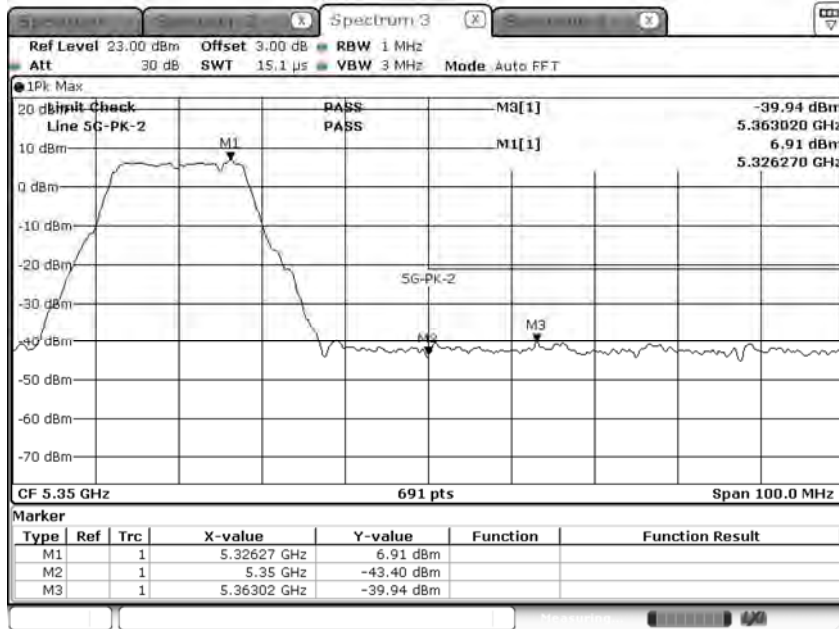

Date: 25.NOV.2020 03:35:47


Average:

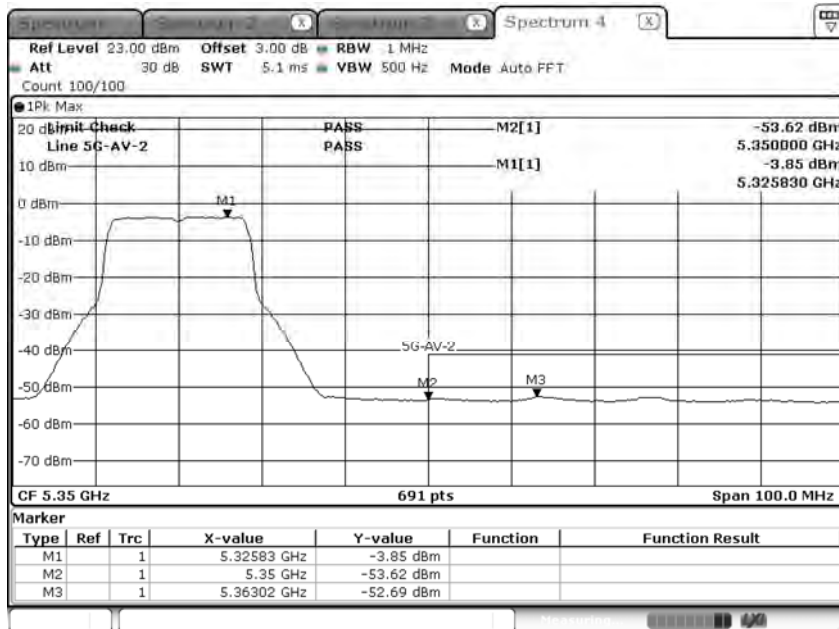

Date: 25.NOV.2020 03:32:38


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5500MHz)

Peak:

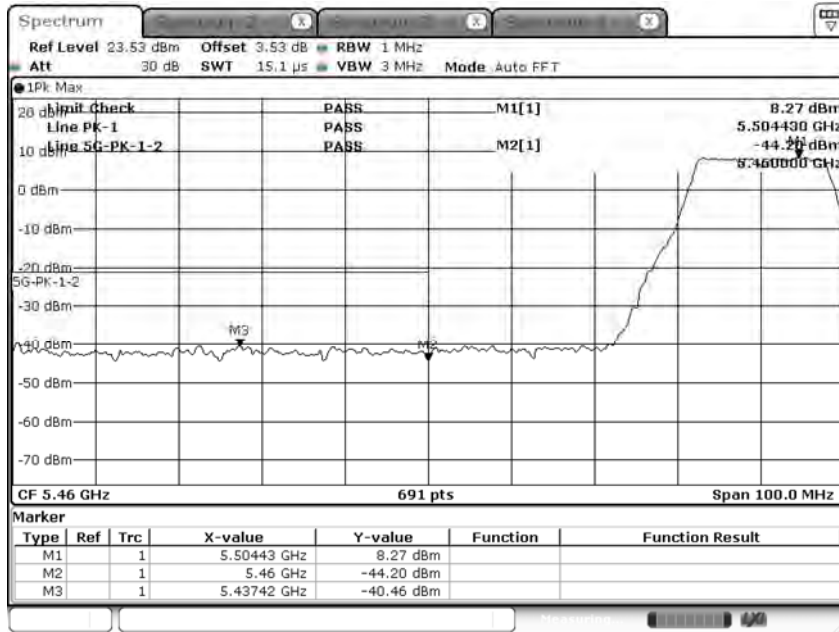

Date: 25.NOV.2020 03:43:41


Average:

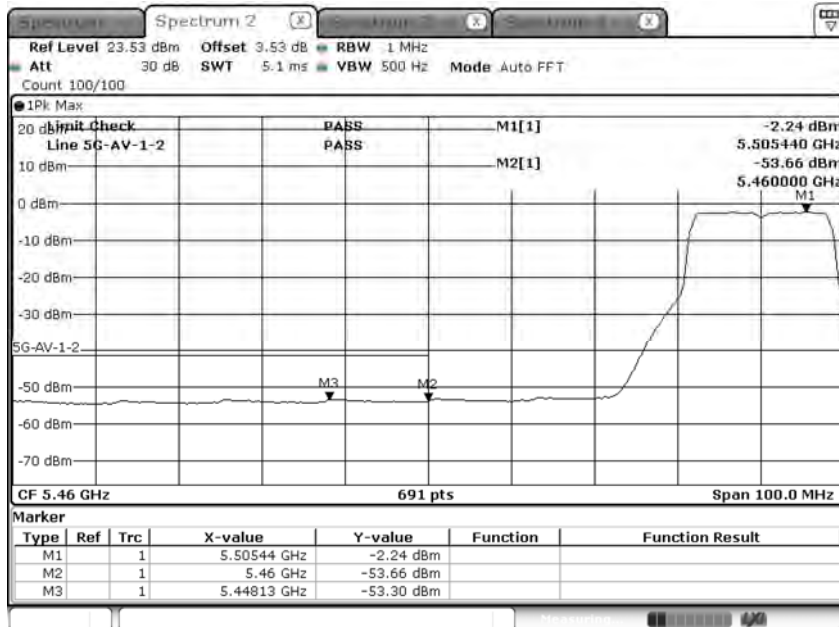

Date: 25.NOV.2020 03:41:32

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5500MHz)


Peak:

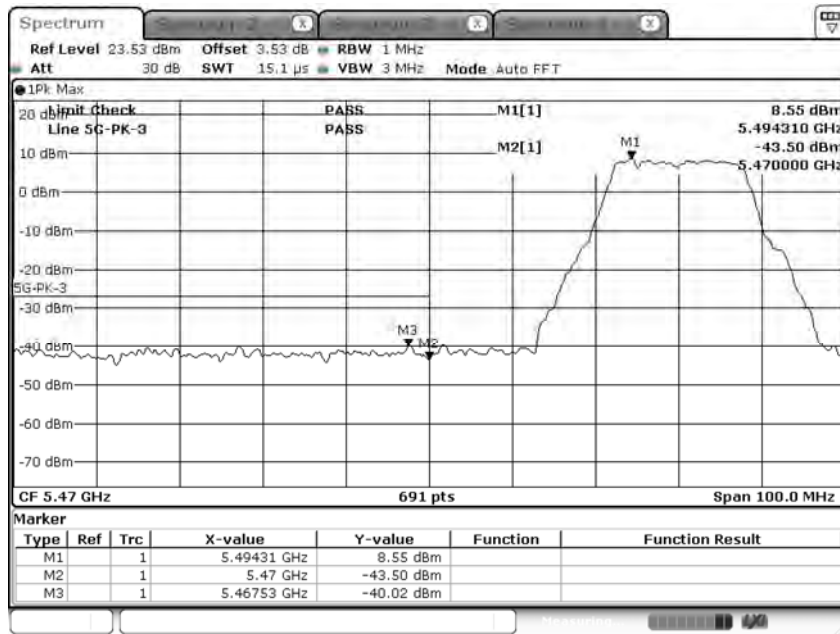

Date: 25.NOV.2020 03:48:22

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5700MHz)


Peak:

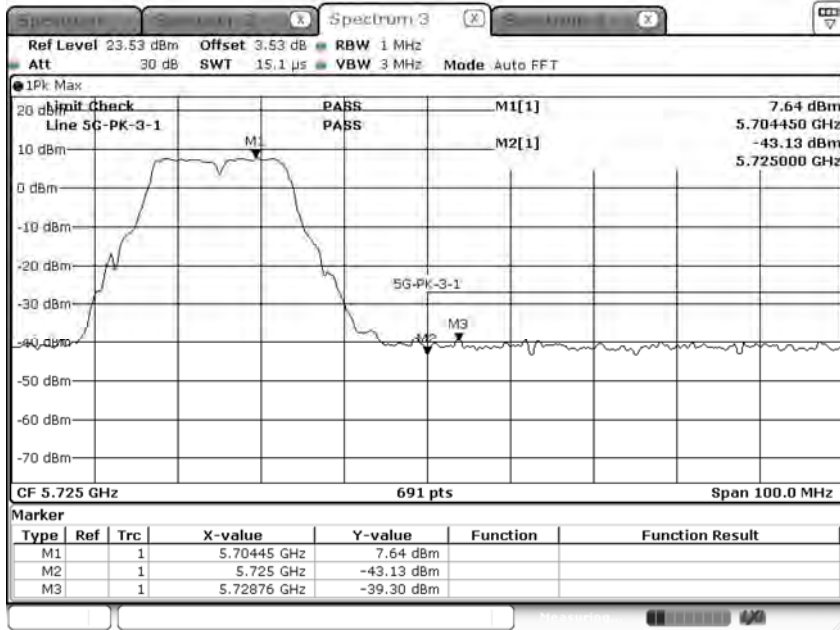

Date: 25.NOV.2020 03:53:22

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5745MHz)


Peak:

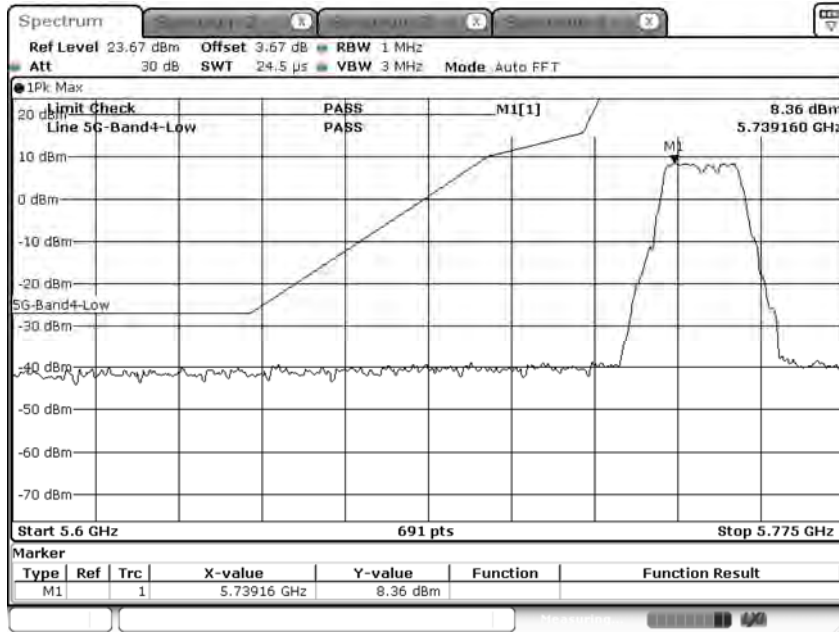

Date: 25.NOV.2020 04:06:14

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 1: SISO A Transmit (802.11a_6Mbps) (5825MHz)


Peak:

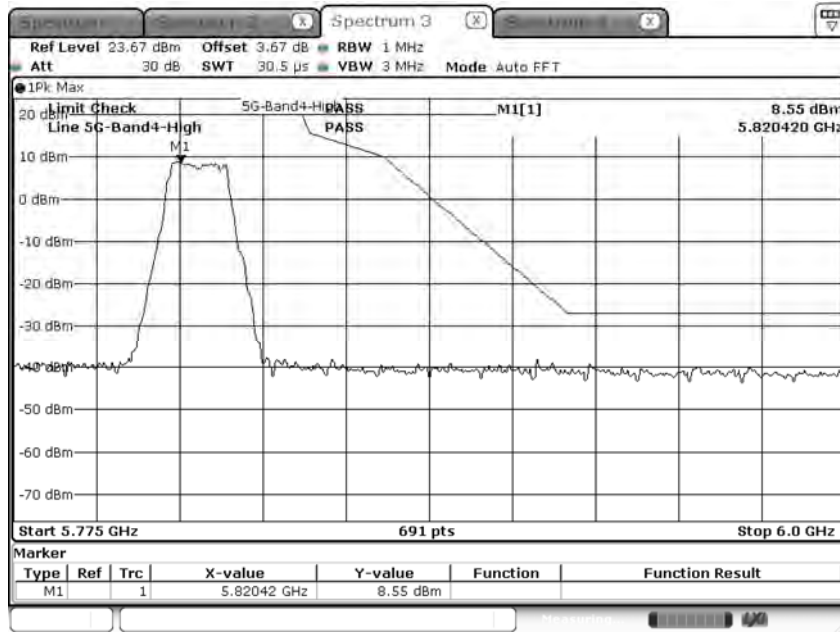

Date: 25.NOV.2020 04:13:03


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5180MHz)

Peak:

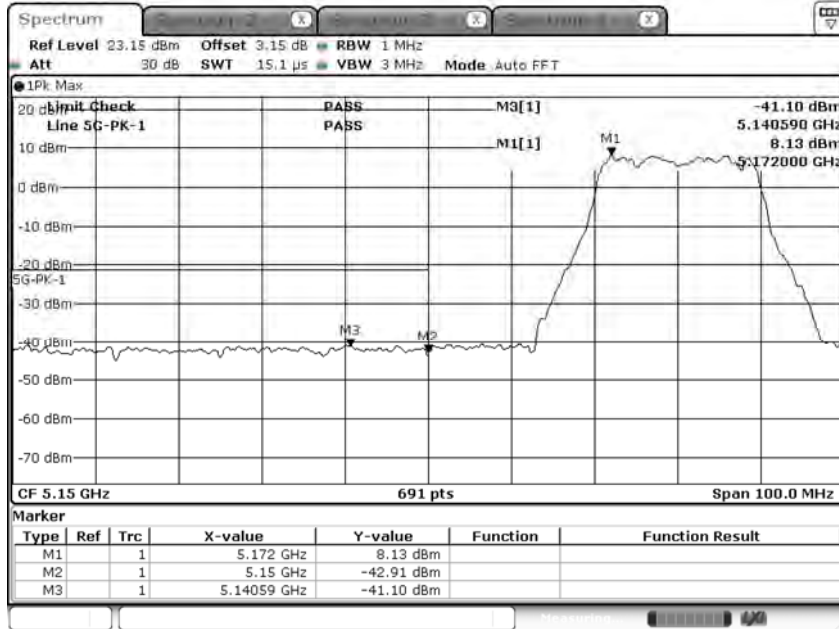

Date: 25.NOV.2020 04:27:18


Average:

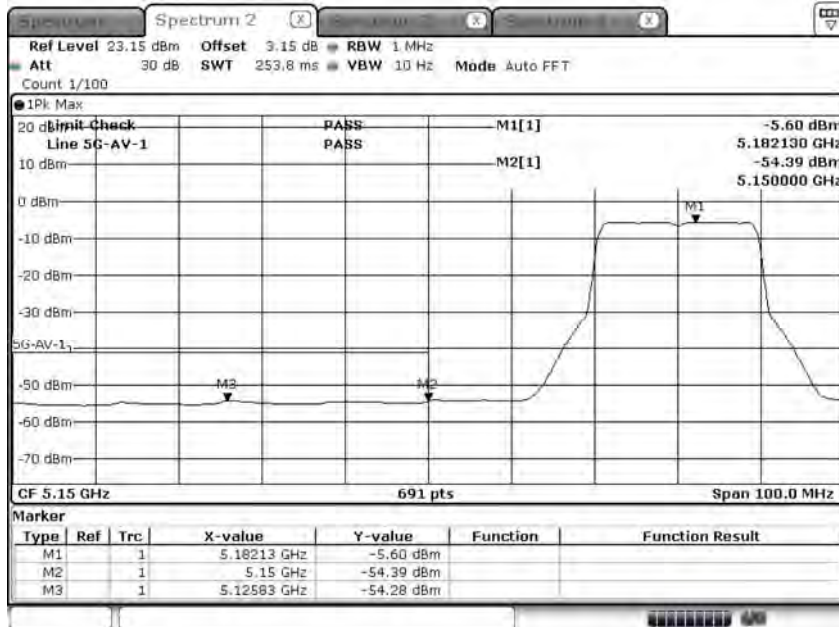

Date: 25.NOV.2020 04:28:39


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5320MHz)

Peak:

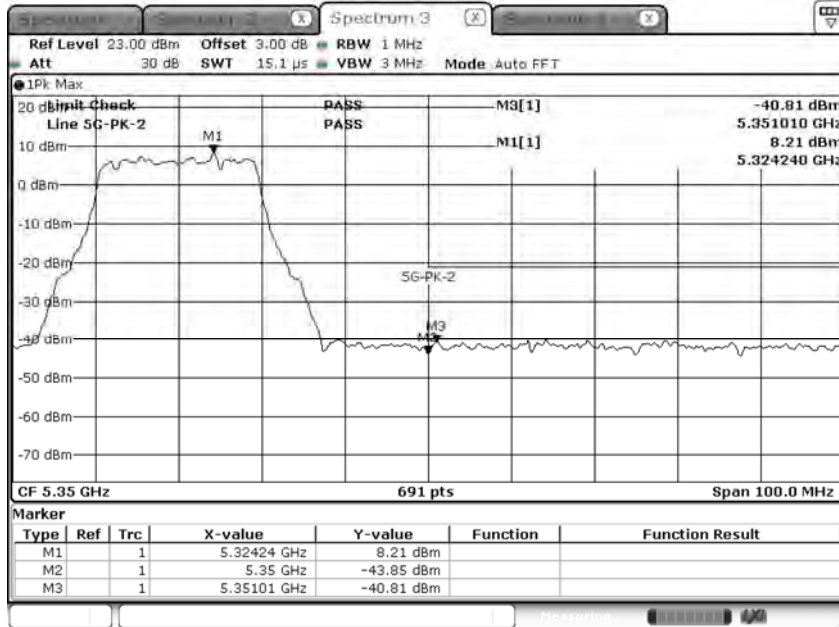

Date: 25.NOV.2020 04:56:41


Average:

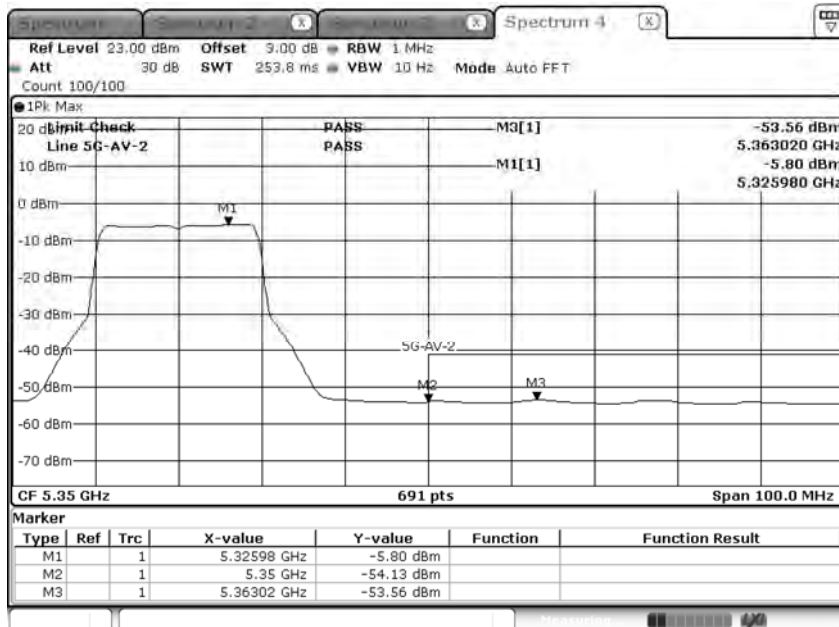

Date: 25.NOV.2020 04:52:13


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5500MHz)

Peak:

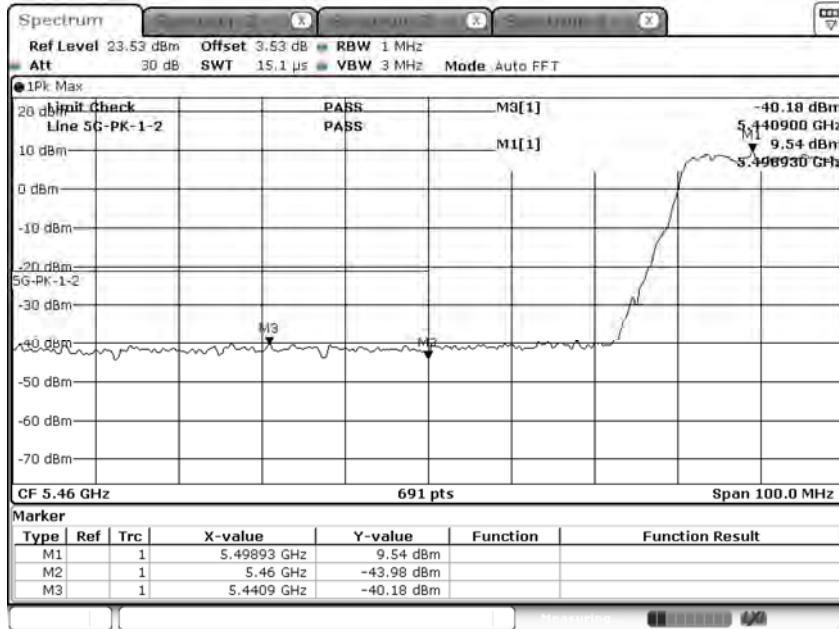

Date: 25.NOV.2020 05:16:00


Average:

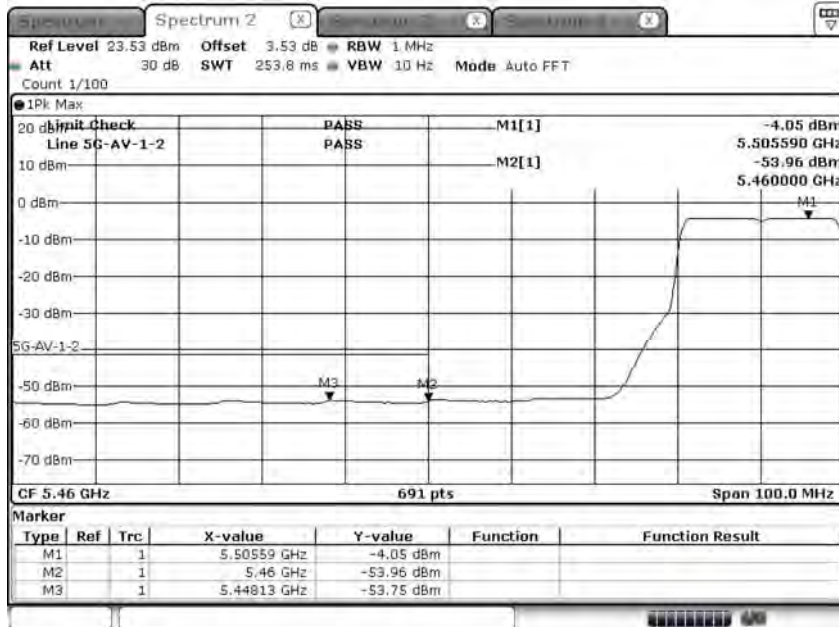

Date: 25.NOV.2020 05:16:12

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5500MHz)


Peak:

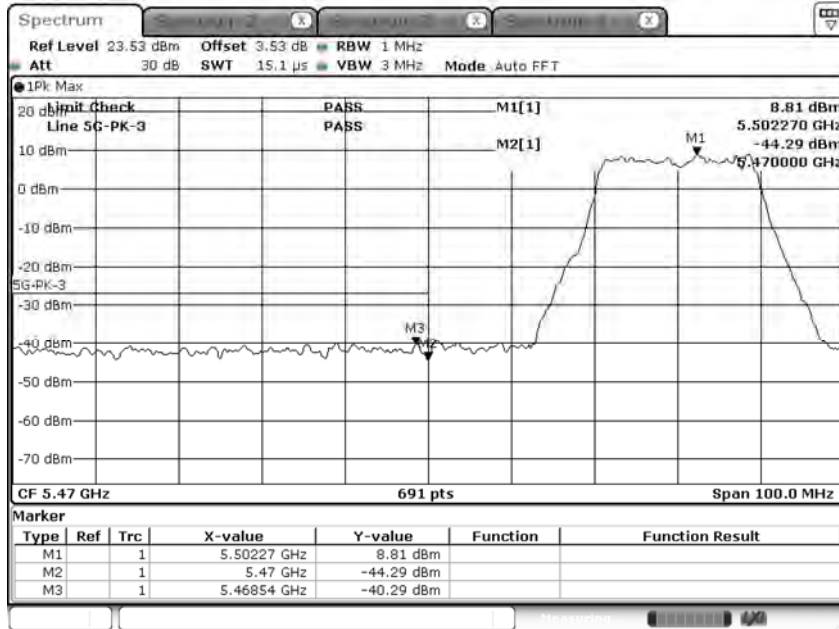

Date: 25.NOV.2020 06:16:30

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5700MHz)


Peak:

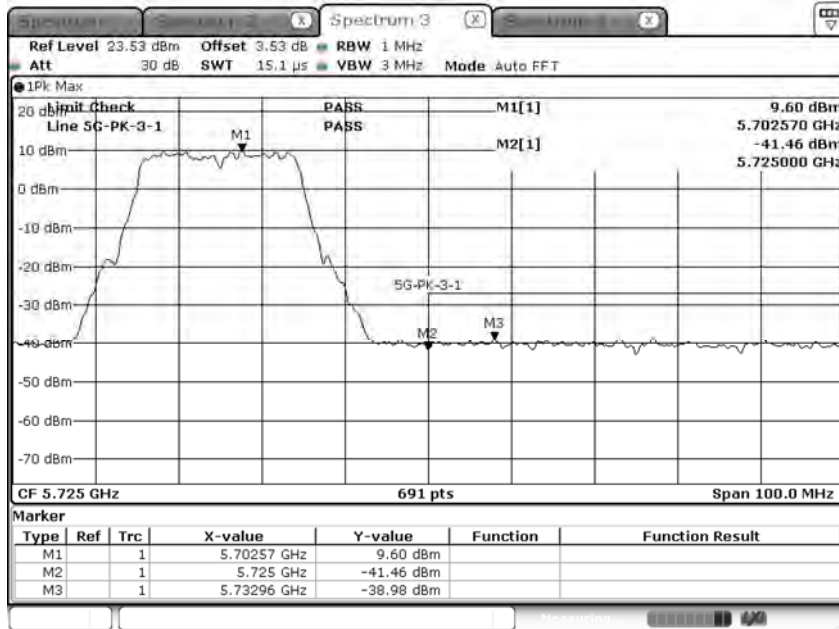

Date: 25.NOV.2020 06:20:41

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5745MHz)


Peak:

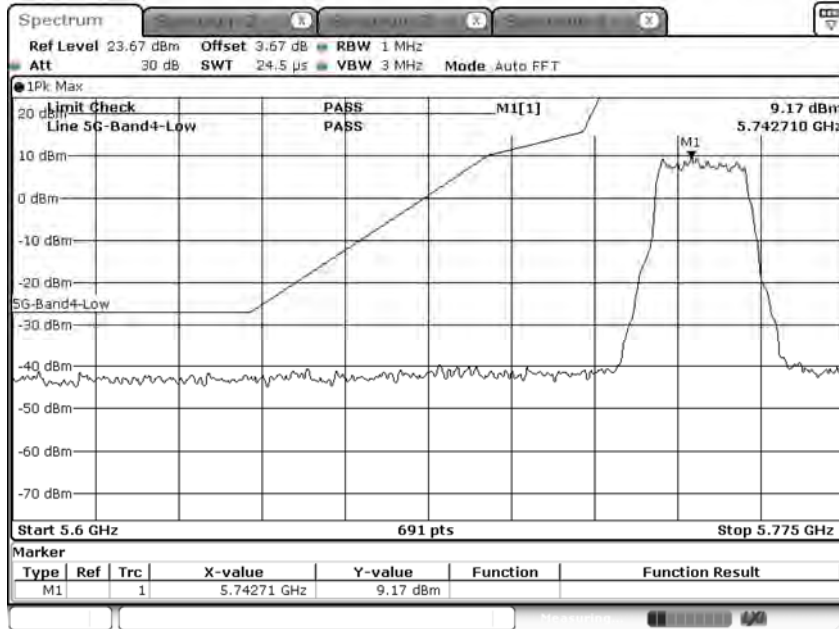

Date: 25.NOV.2020 06:25:08

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 6: SISO A Transmit (802.11ax-20BW_8.6Mbps) (5825MHz)


Peak:

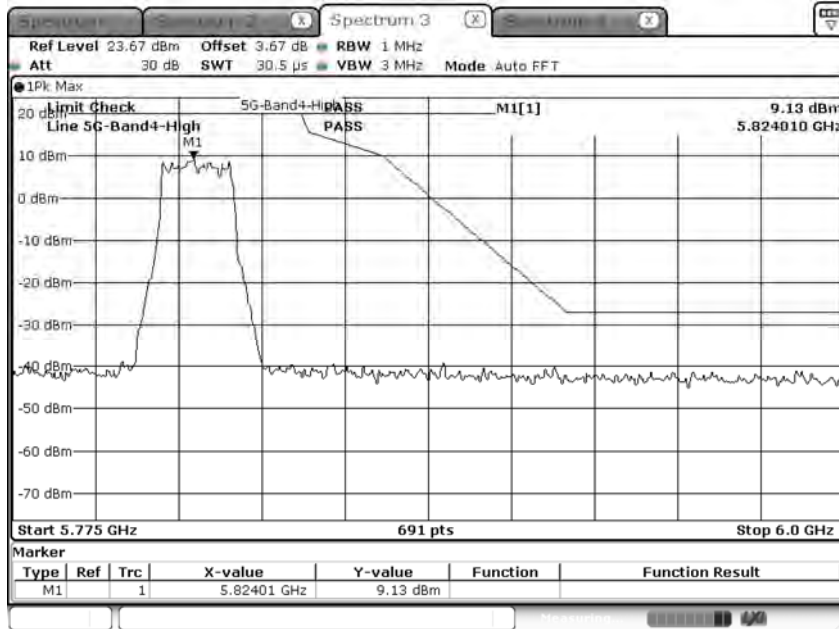

Date: 25.NOV.2020 06:26:46


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5190MHz)

Peak:

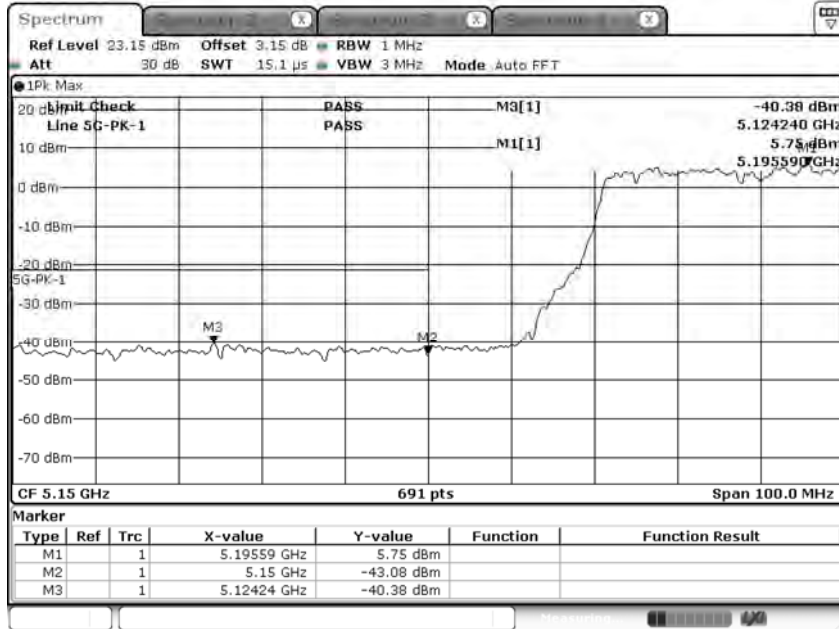

Date: 25.NOV.2020 06:37:55


Average:

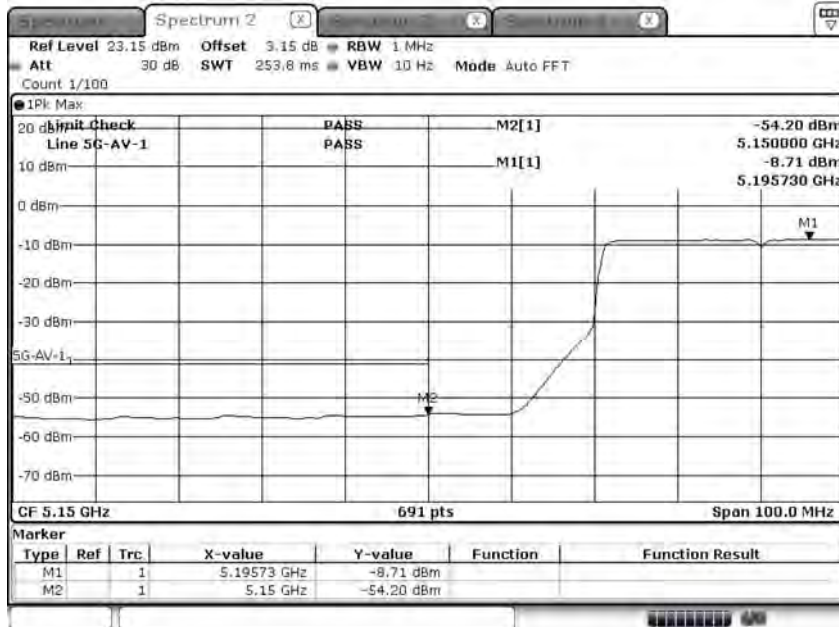

Date: 25.NOV.2020 06:38:27


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Peak:

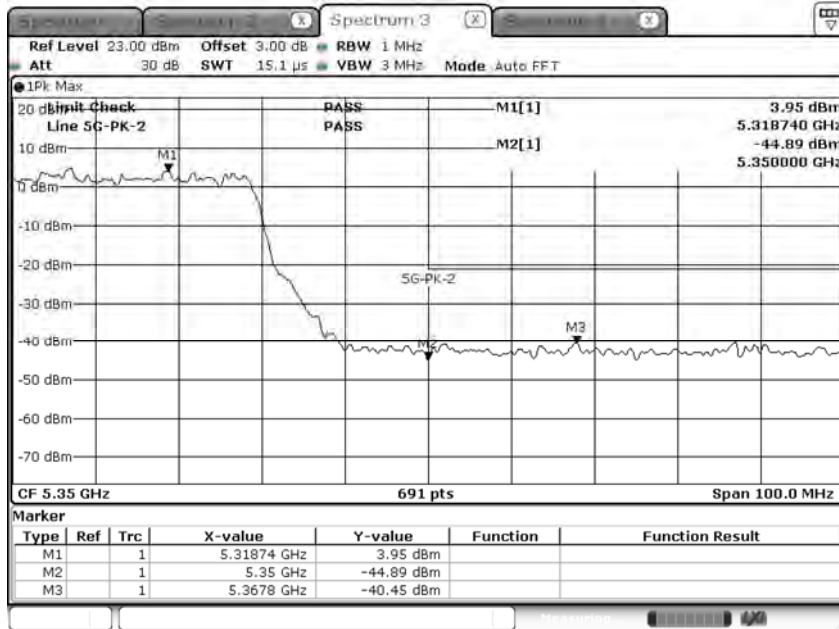

Date: 25.NOV.2020 07:04:53


Average:

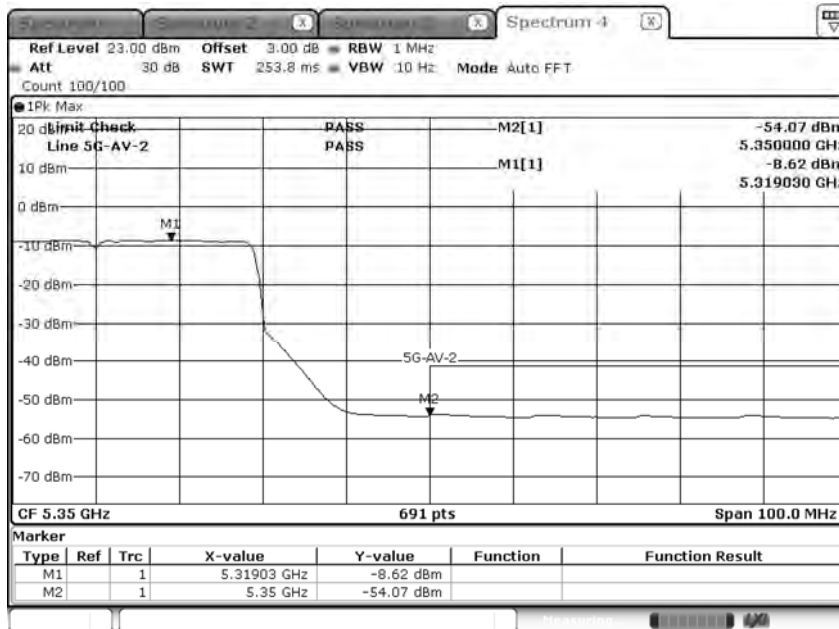

Date: 25.NOV.2020 07:03:08


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5510MHz)

Peak:

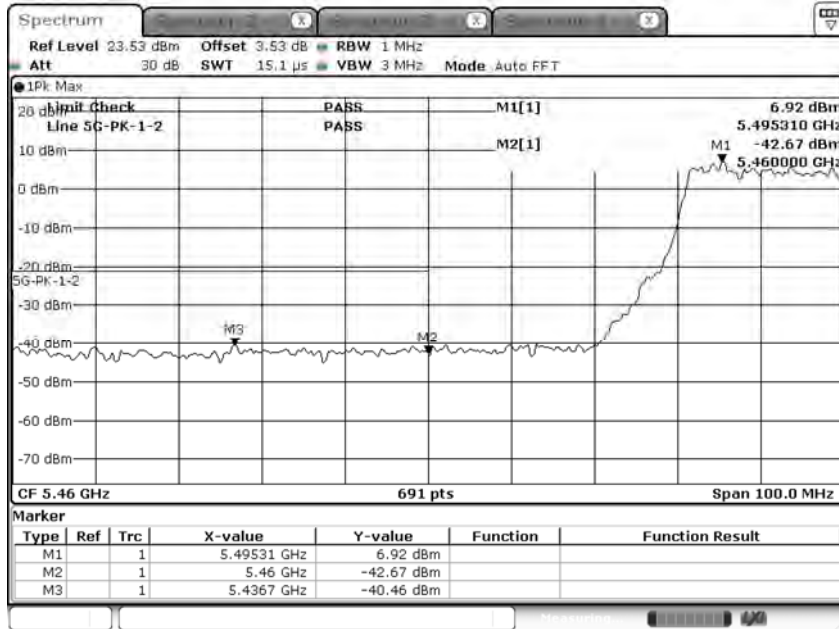

Date: 25.NOV.2020 07:10:23


Average:

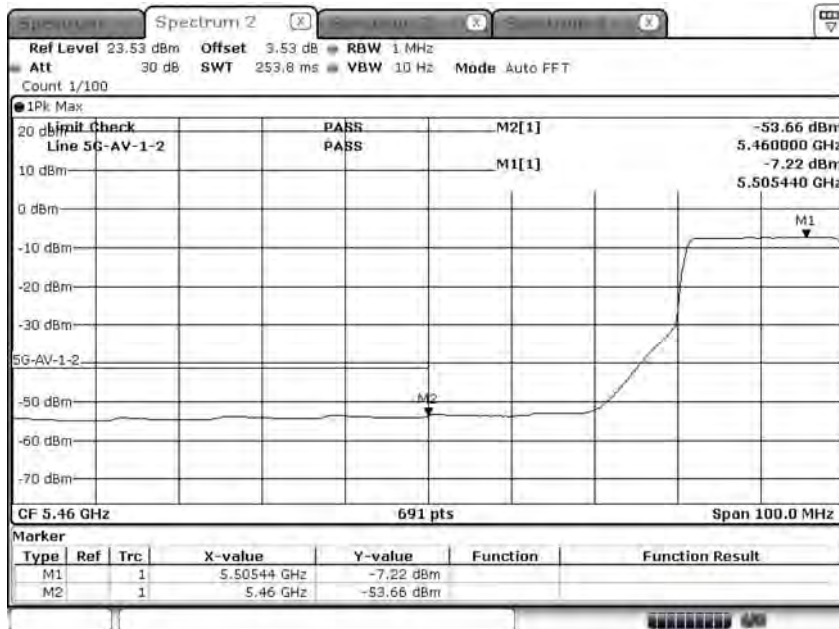

Date: 25.NOV.2020 07:08:38

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5510MHz)


Peak:

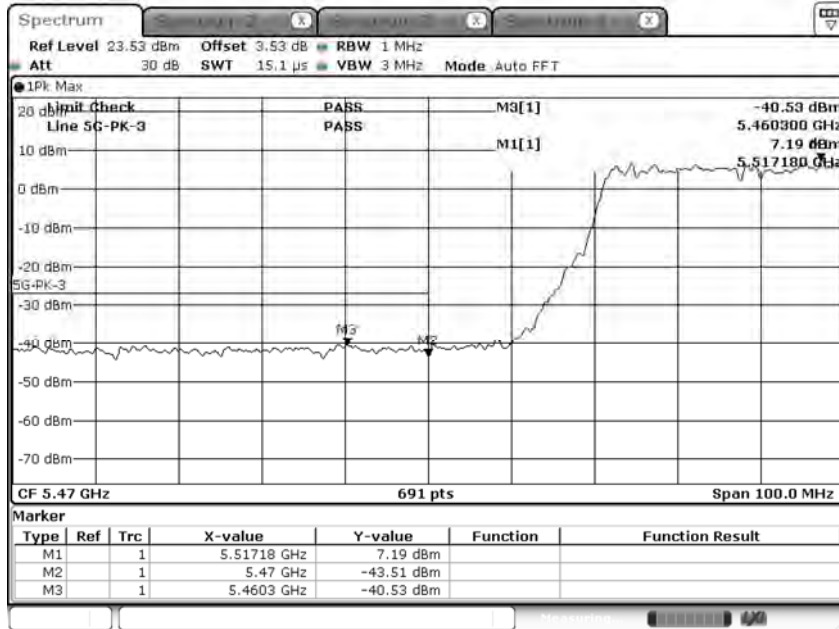

Date: 25.NOV.2020 07:13:17

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5670MHz)


Peak:

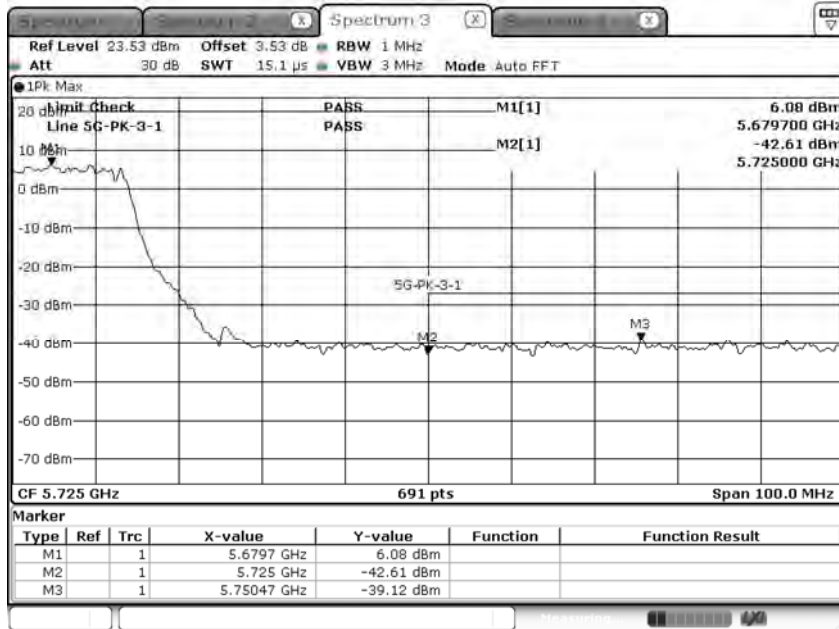

Date: 25.NOV.2020 07:16:00

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/14
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5755MHz)


Peak:

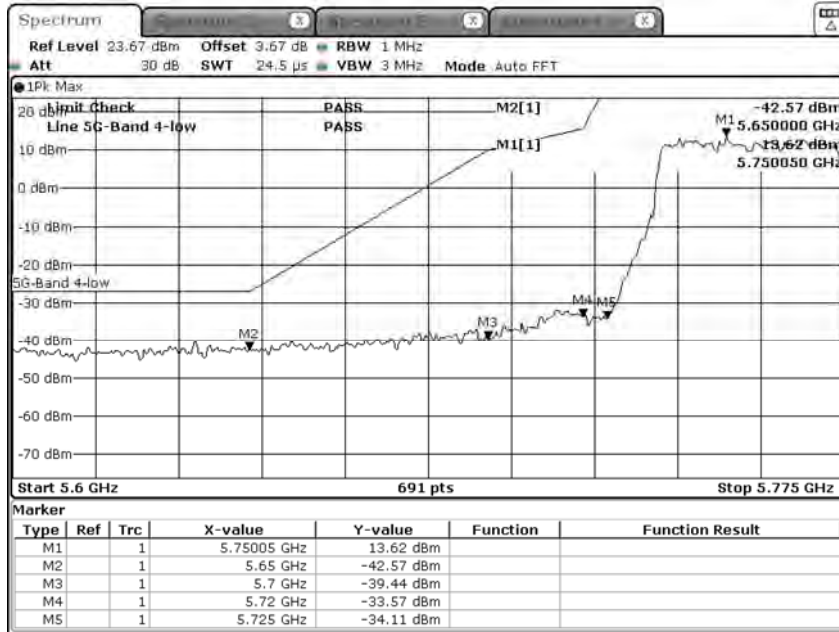

Date: 14.NOV.2020 07:21:25

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 7: SISO A Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)


Peak:

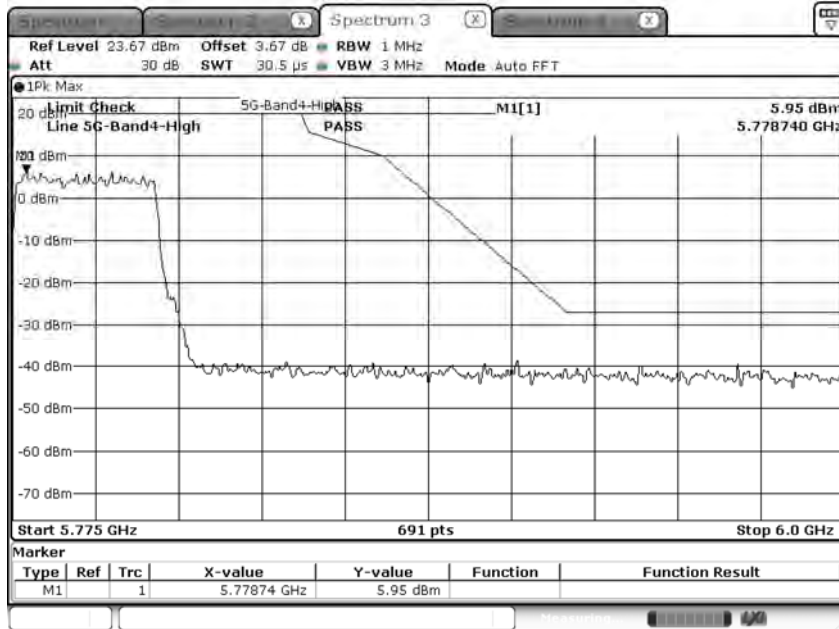

Date: 25.NOV.2020 07:24:17


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Peak:

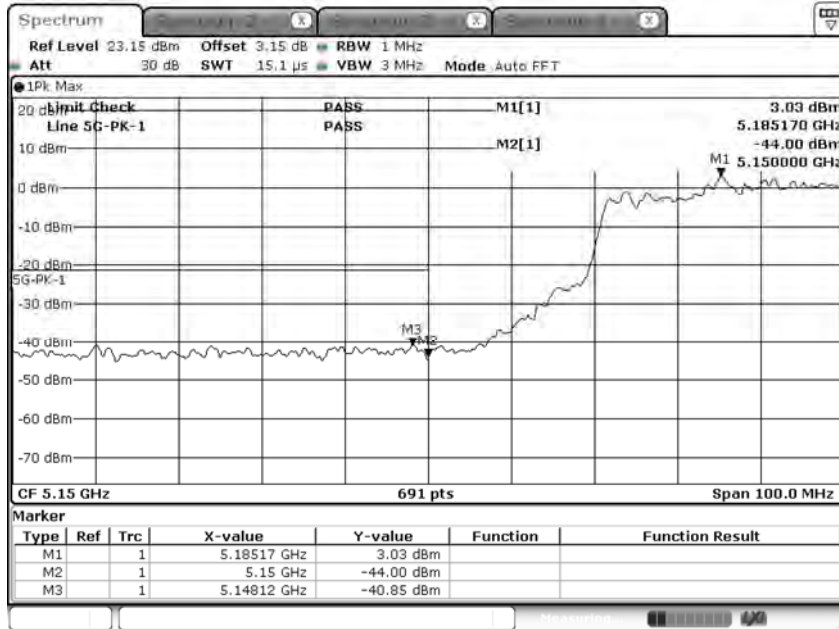

Date: 25.NOV.2020 07:28:56


Average:

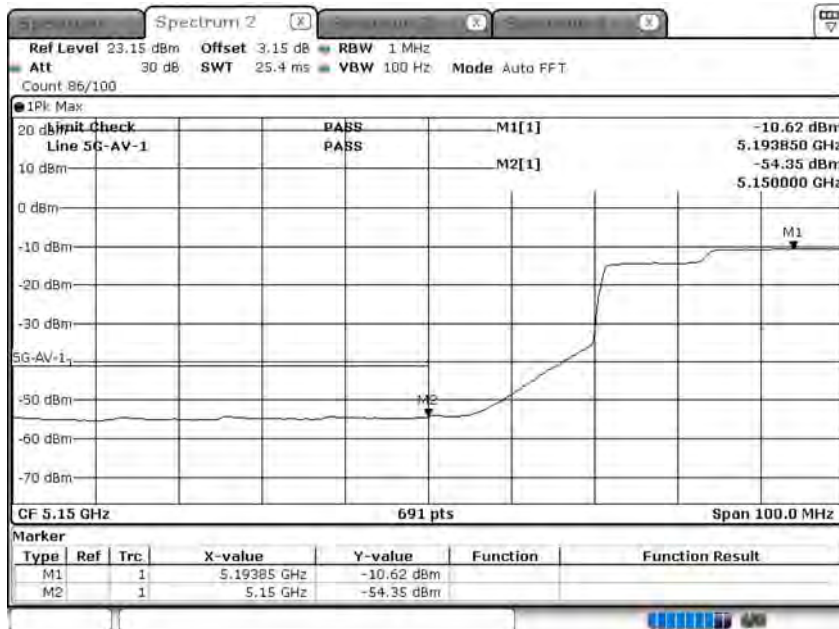

Date: 25.NOV.2020 07:28:22


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Peak:

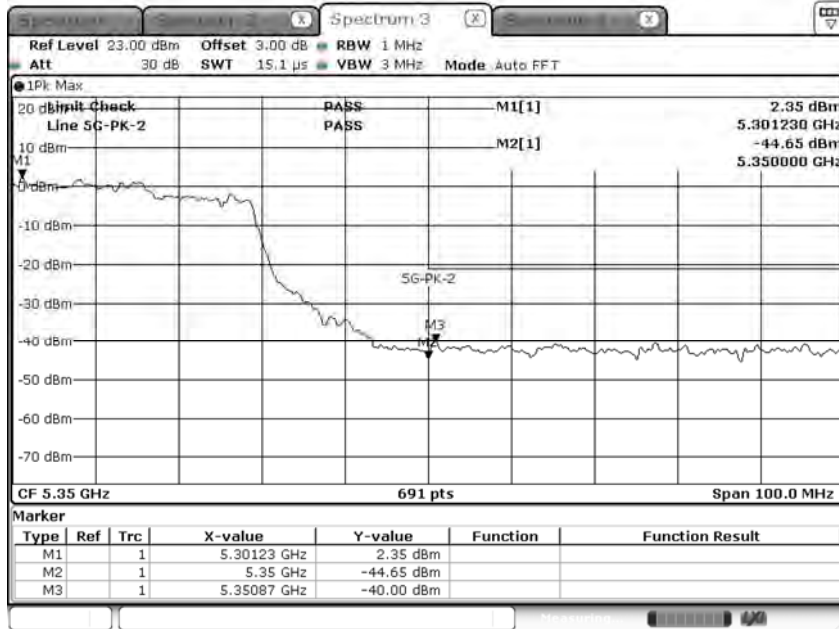

Date: 25.NOV.2020 07:31:42


Average:

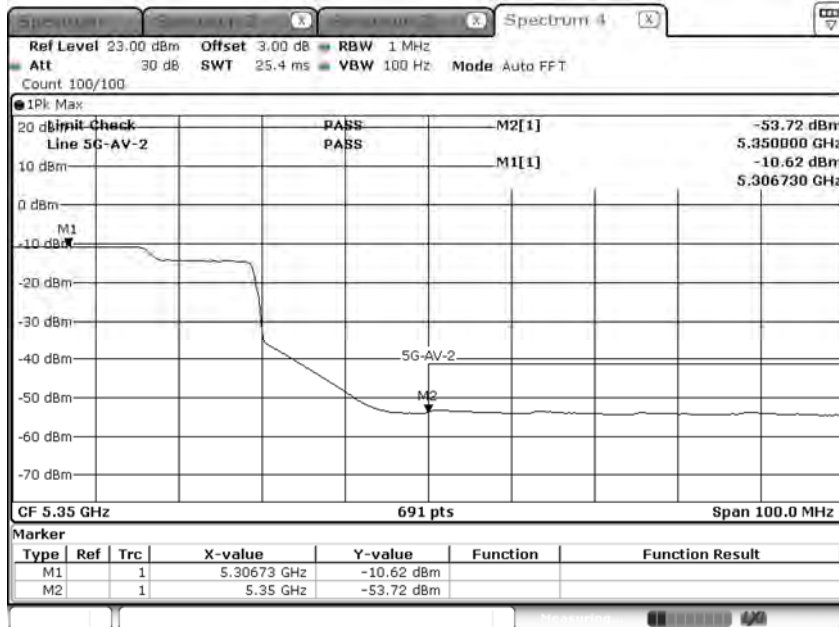

Date: 25.NOV.2020 07:30:16


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Peak:

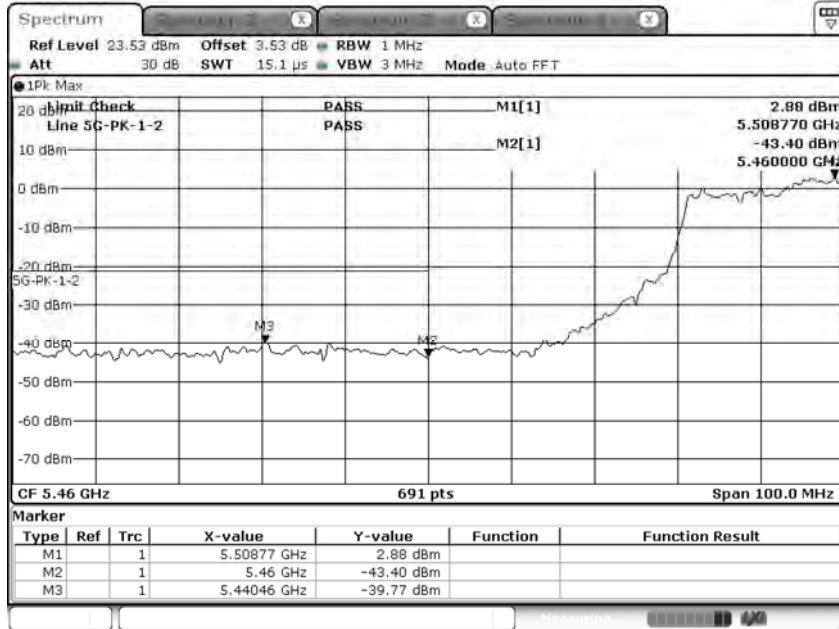

Date: 25.NOV.2020 07:35:08


Average:

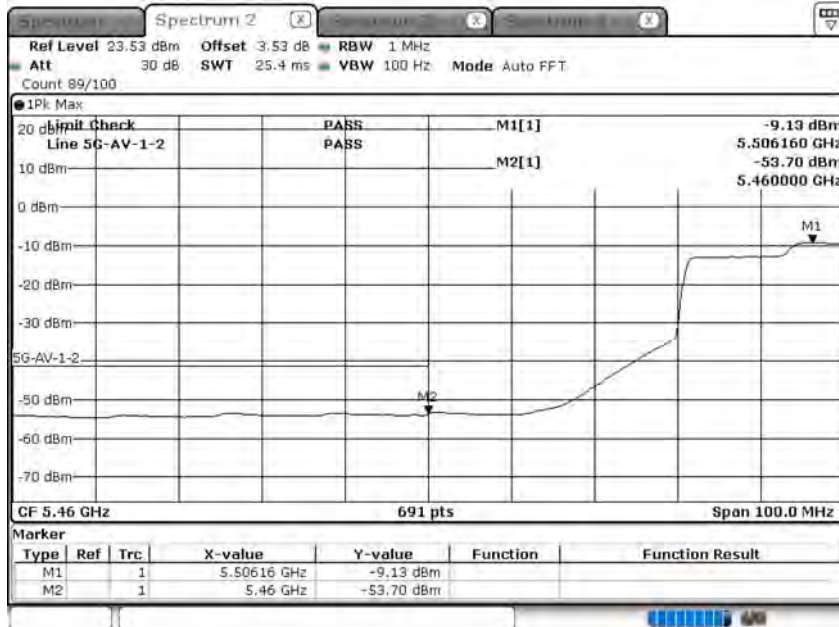

Date: 25.NOV.2020 07:33:30

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5530MHz)


Peak:

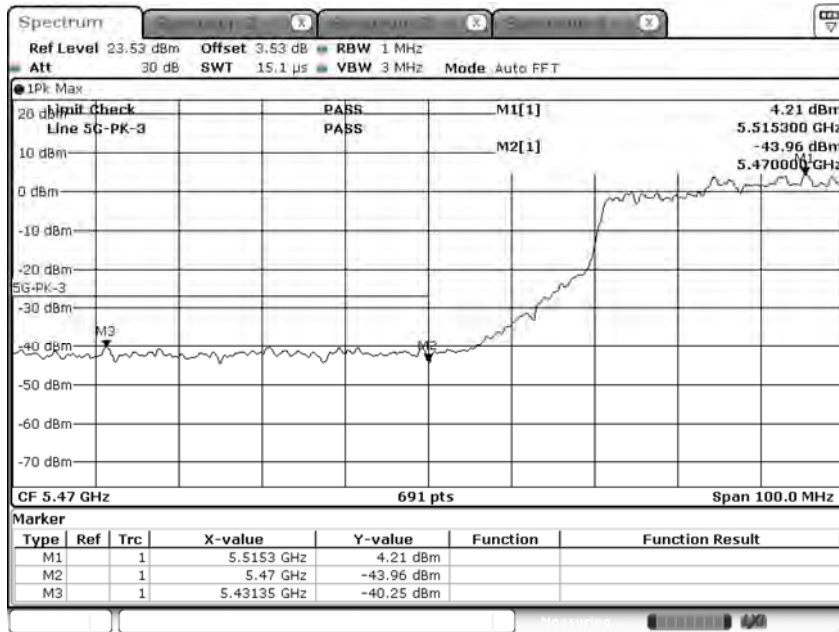

Date: 25.NOV.2020 07:36:50

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 8: SISO A Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Peak:

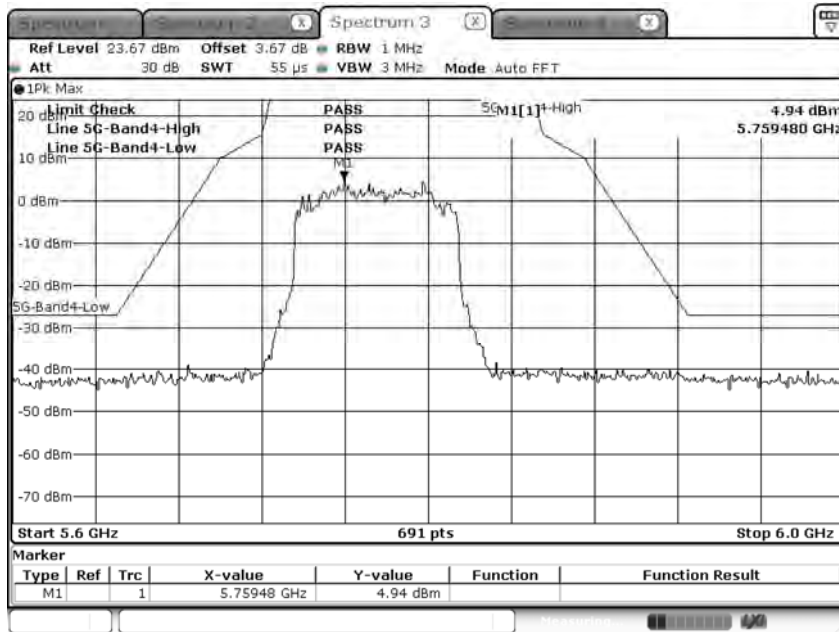


Date: 25.NOV.2020 07:39:13

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 9: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)


(Band 1)

Peak:

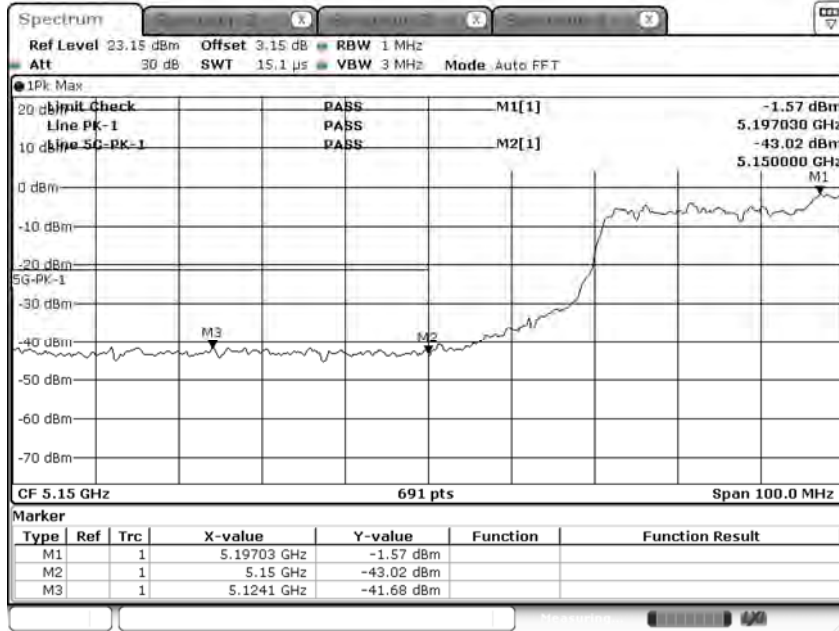

Date: 25.NOV.2020 07:42:01

Average:

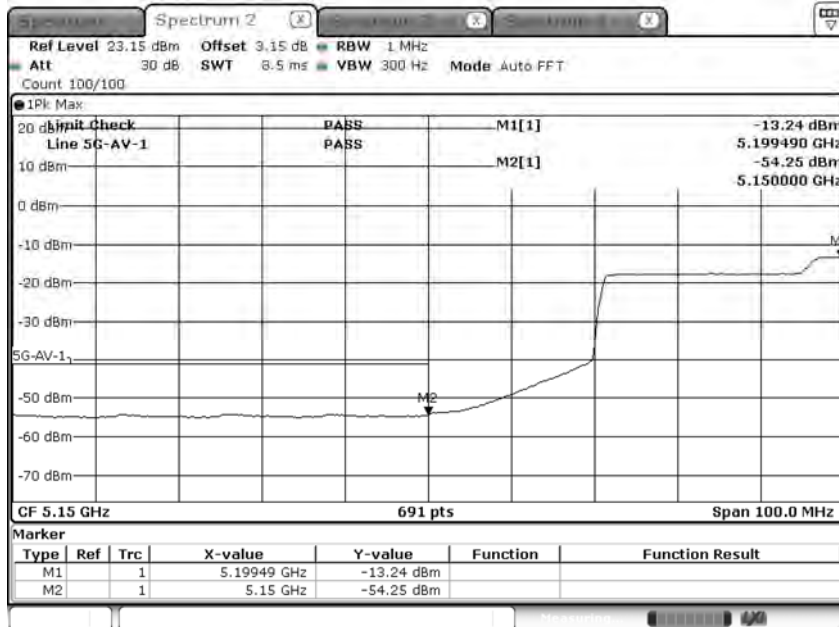

Date: 25.NOV.2020 07:40:36

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 9: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)


(Band 2)

Peak:



Date: 25.NOV.2020 07:43:36


Average:

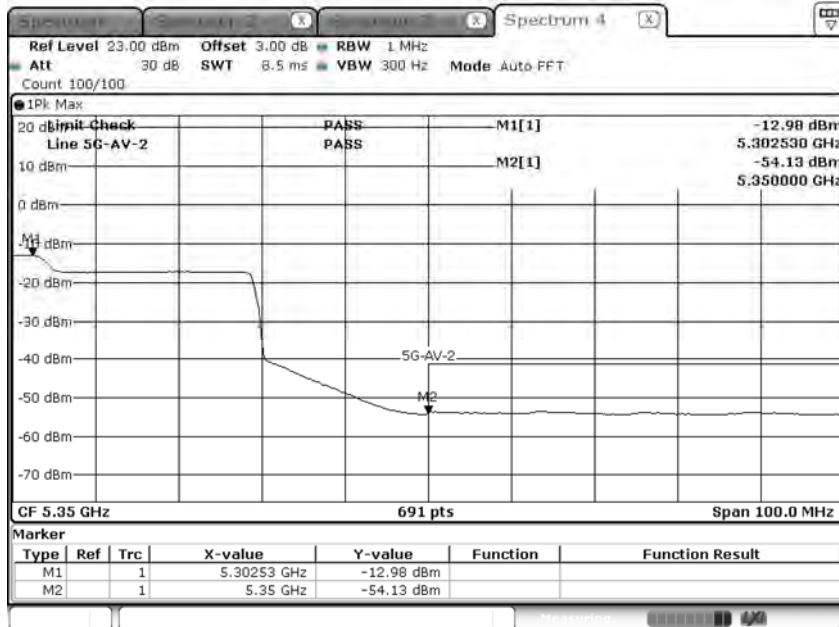

Date: 25.NOV.2020 07:42:52


Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 9: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Peak:

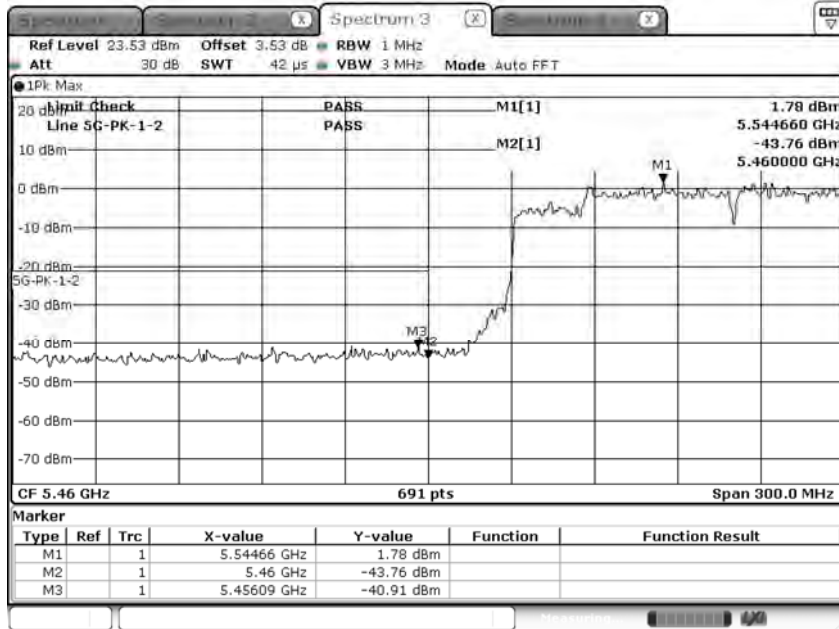

Date: 25.NOV.2020 07:48:36


Average:

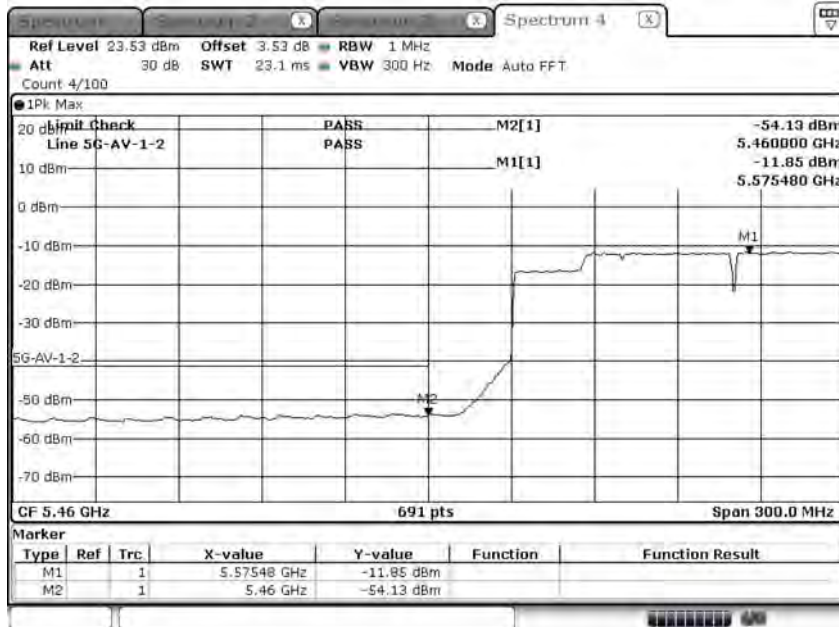

Date: 25.NOV.2020 07:46:40

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/25
 Test Mode : Mode 9: SISO A Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Peak:

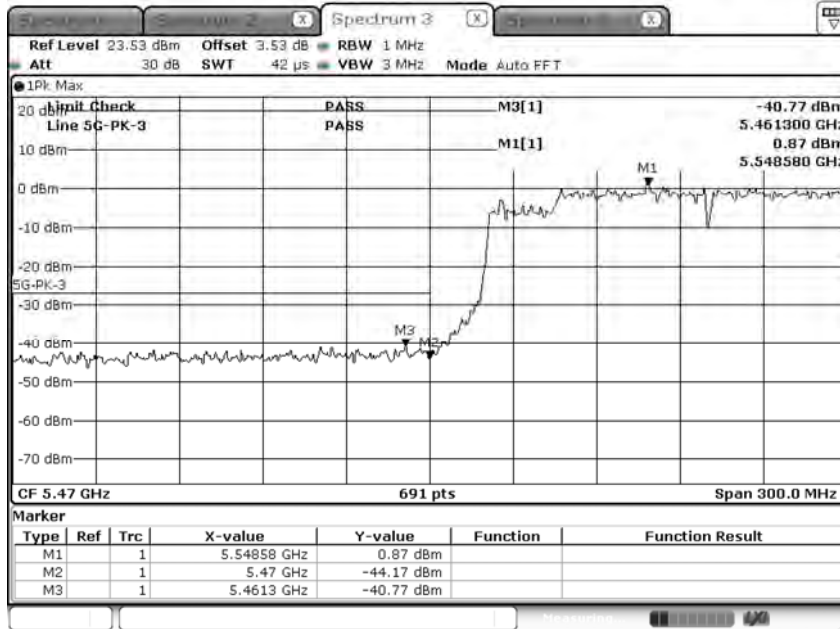


Date: 25.NOV.2020 07:50:36

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/27
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5180MHz)


Chain A

Peak:

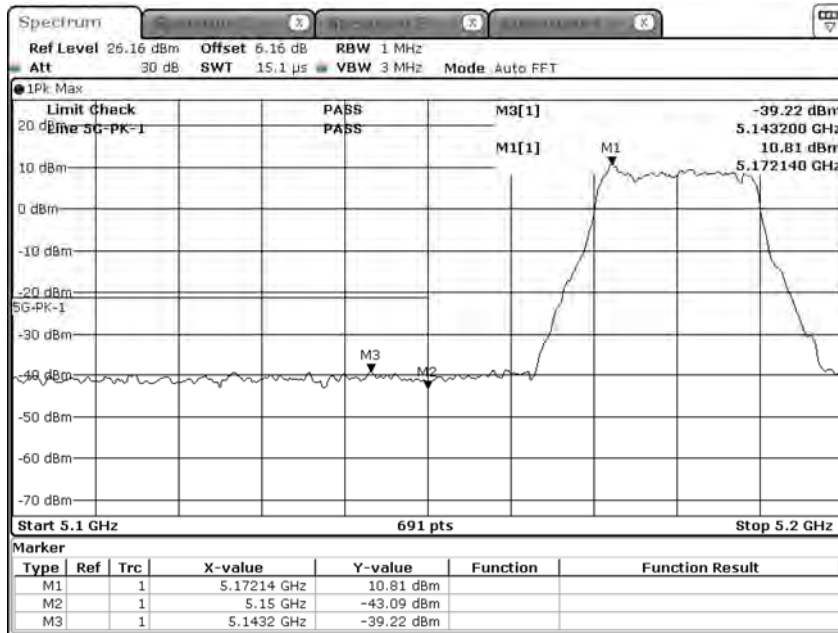

Date: 27.NOV.2020 15:44:18


Average:

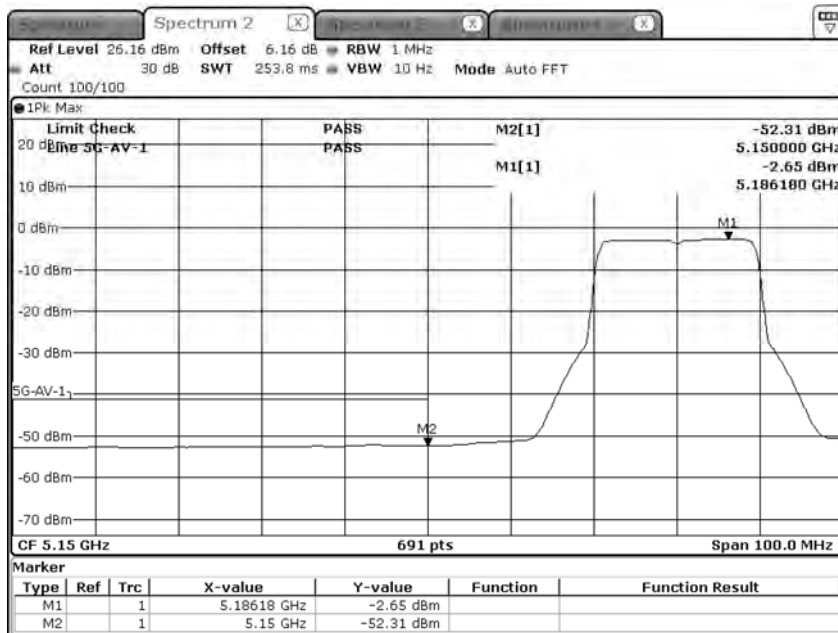

Date: 27.NOV.2020 15:42:38


Chain B

Peak:

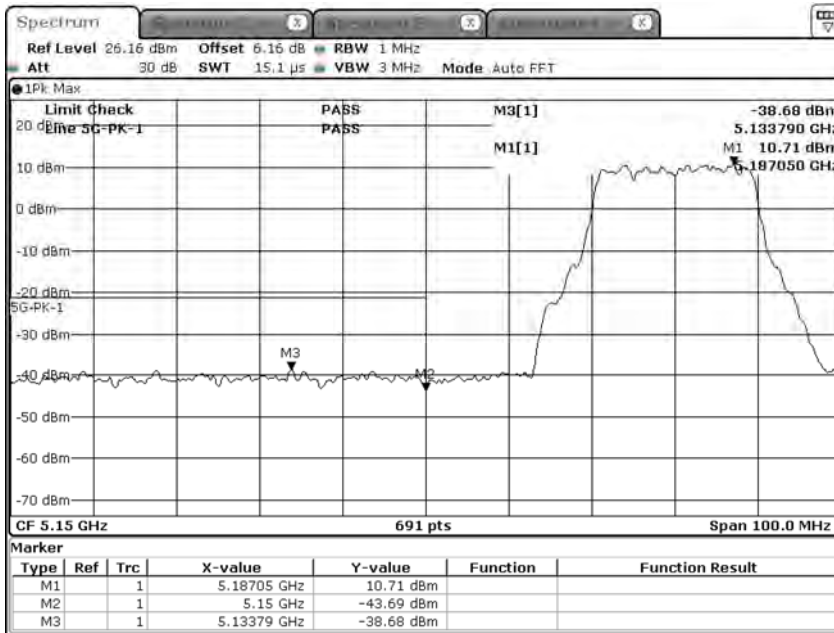

Date: 27.NOV.2020 16:21:28

Average:

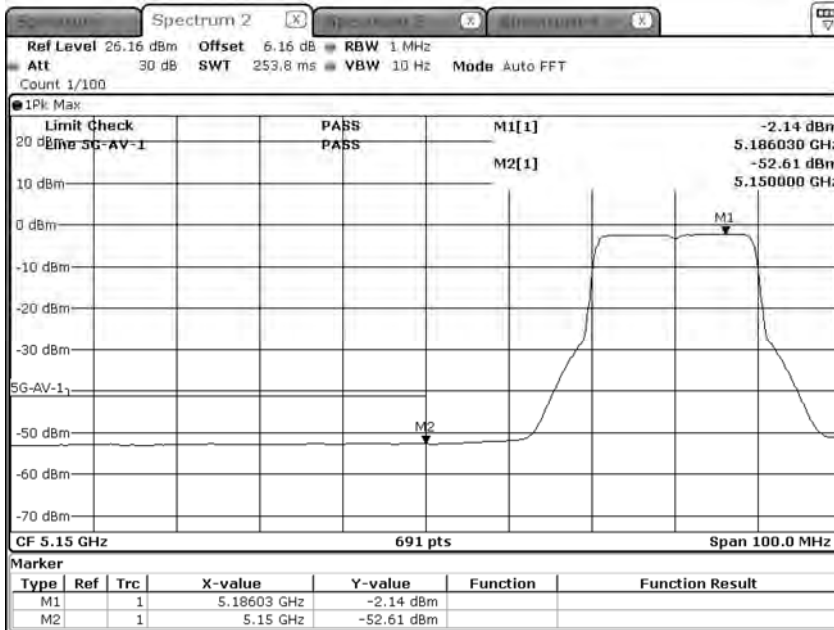


Date: 27.NOV.2020 16:18:35

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/27
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5320MHz)


Chain A

Peak:

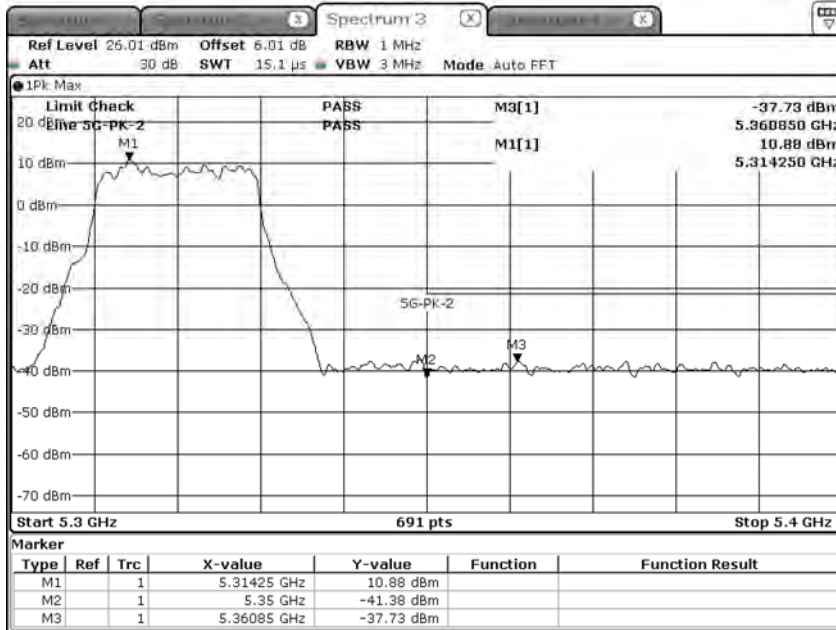

Date: 27.NOV.2020 15:49:44


Average:

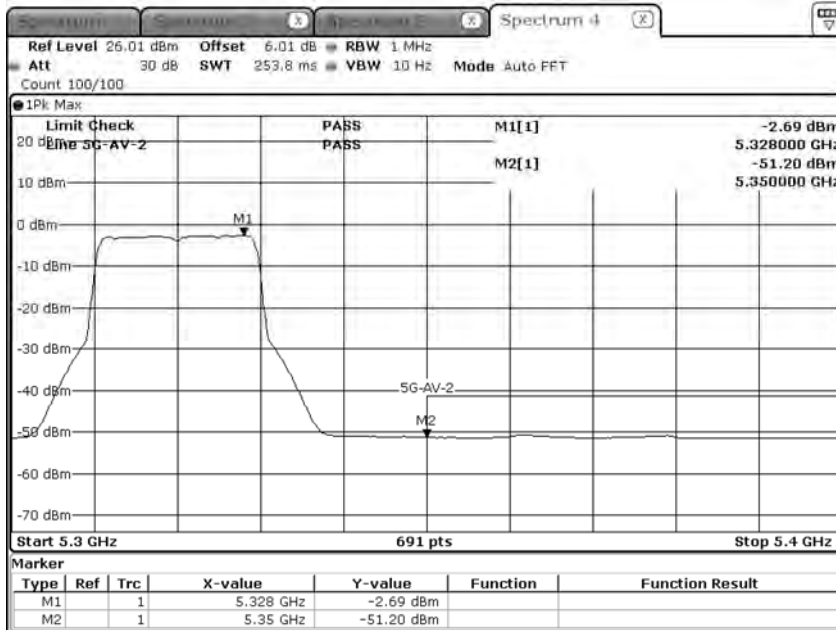

Date: 27.NOV.2020 15:48:17


Chain B

Peak:

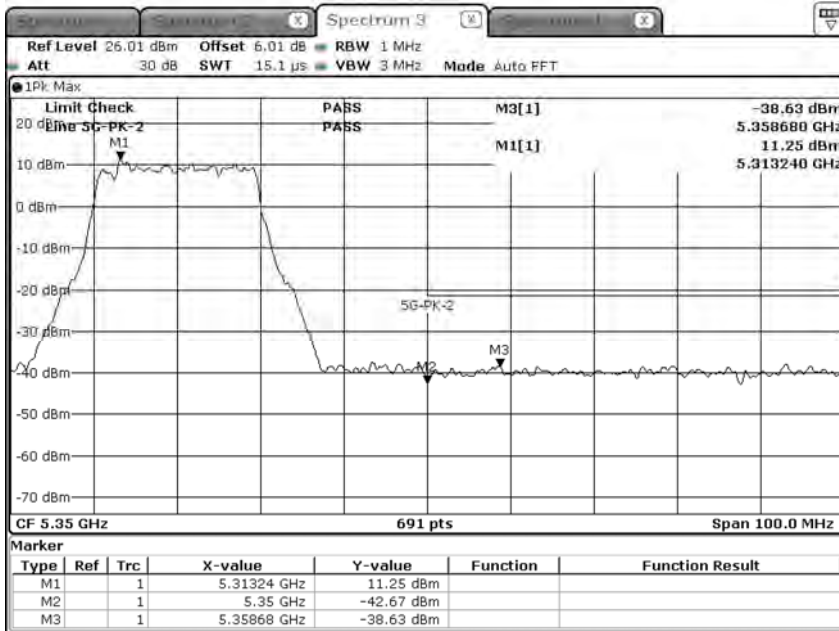

Date: 27.NOV.2020 16:27:31

Average:

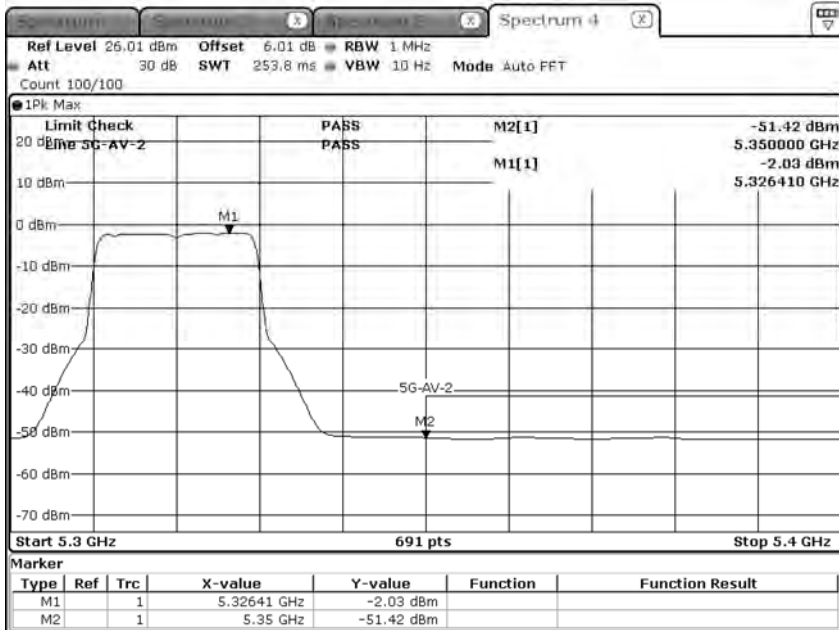


Date: 27.NOV.2020 16:24:56

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/27
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5500MHz)


Chain A

Peak:

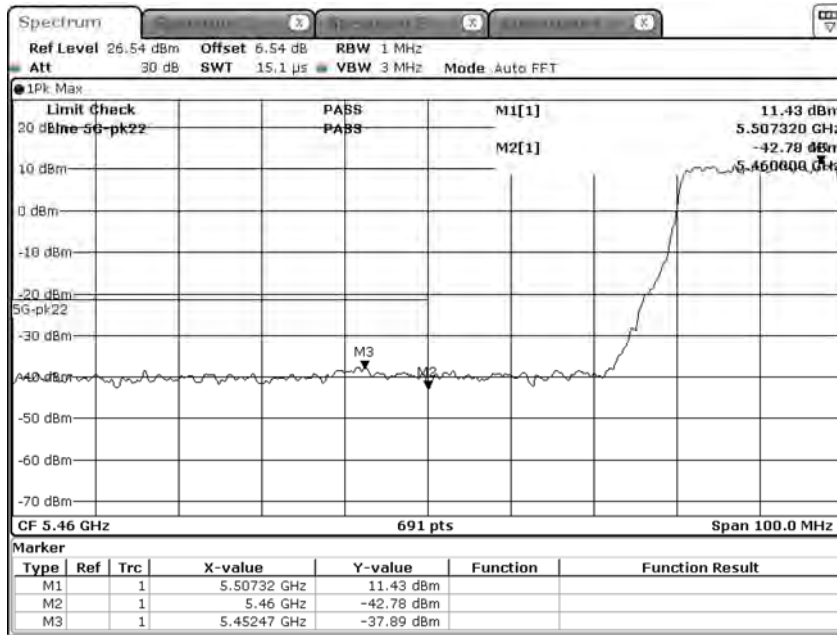

Date: 27.NOV.2020 15:58:49


Average:

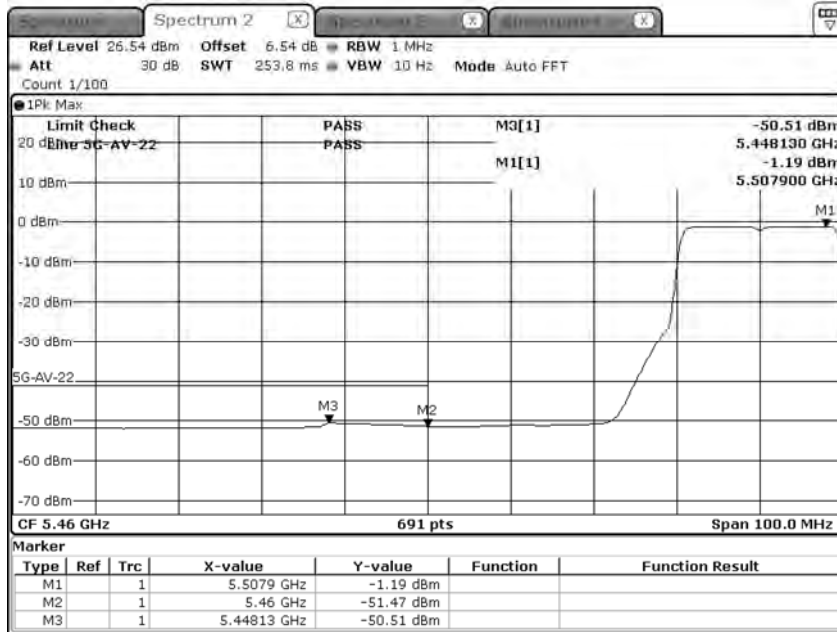

Date: 27.NOV.2020 15:57:01


Chain B

Peak:

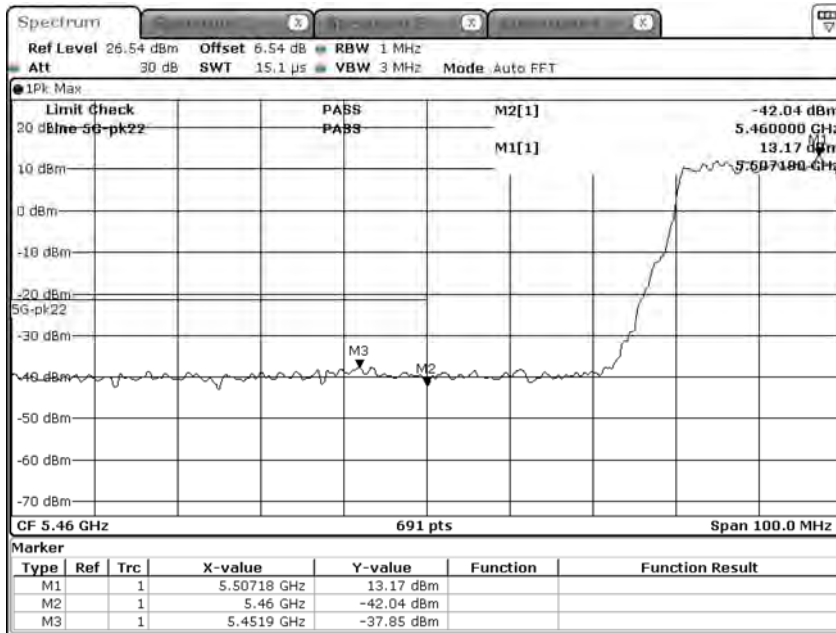

Date: 27.NOV.2020 16:35:52

Average:

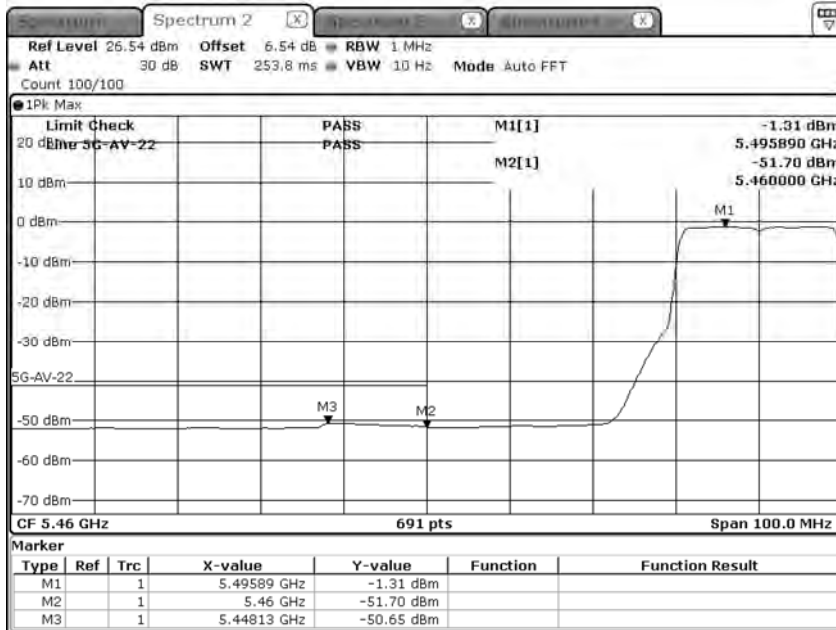


Date: 27.NOV.2020 16:33:21

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/27
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5500MHz)

Chain A


Peak:

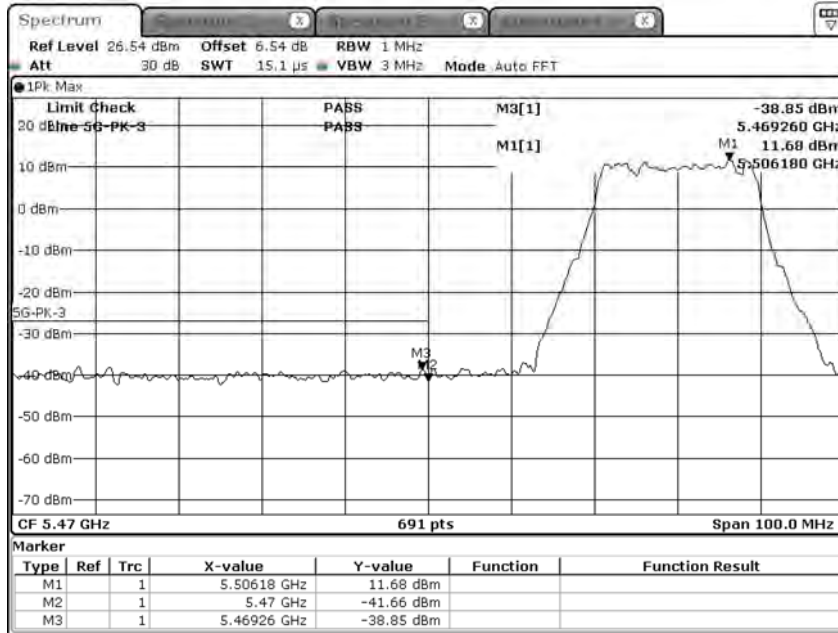

Date: 27.NOV.2020 16:00:48

Chain B

Peak:

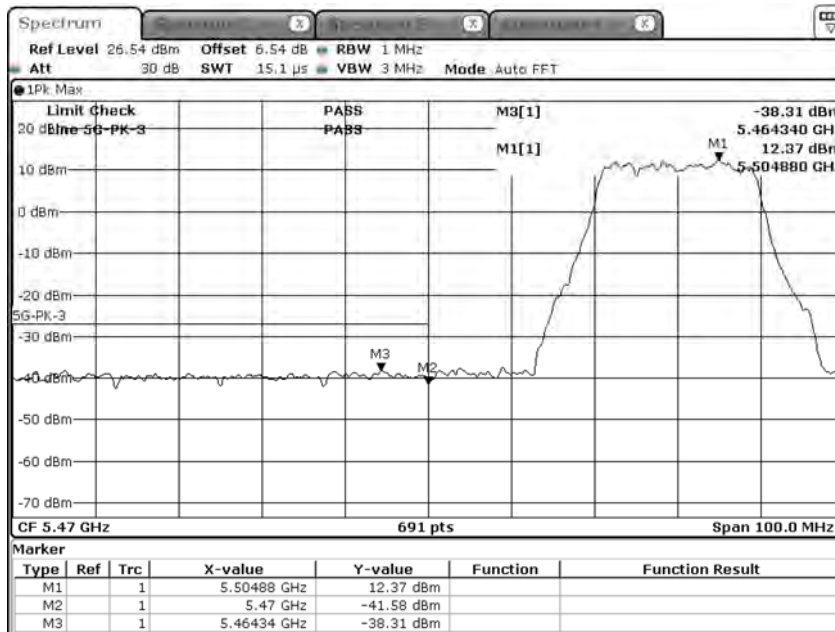


Date: 27.NOV.2020 16:39:36

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/27
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5700MHz)

Chain A


Peak:

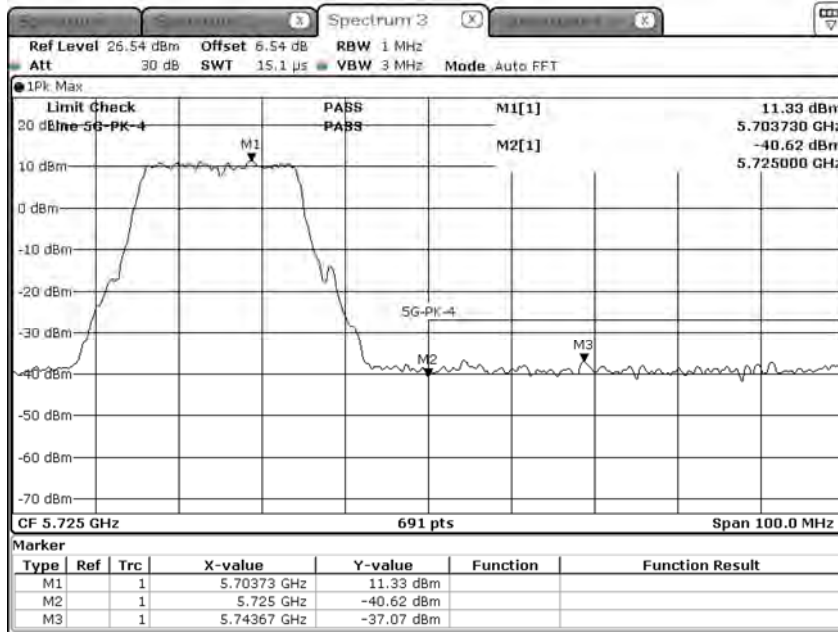

Date: 27.NOV.2020 16:03:11

Chain B

Peak:

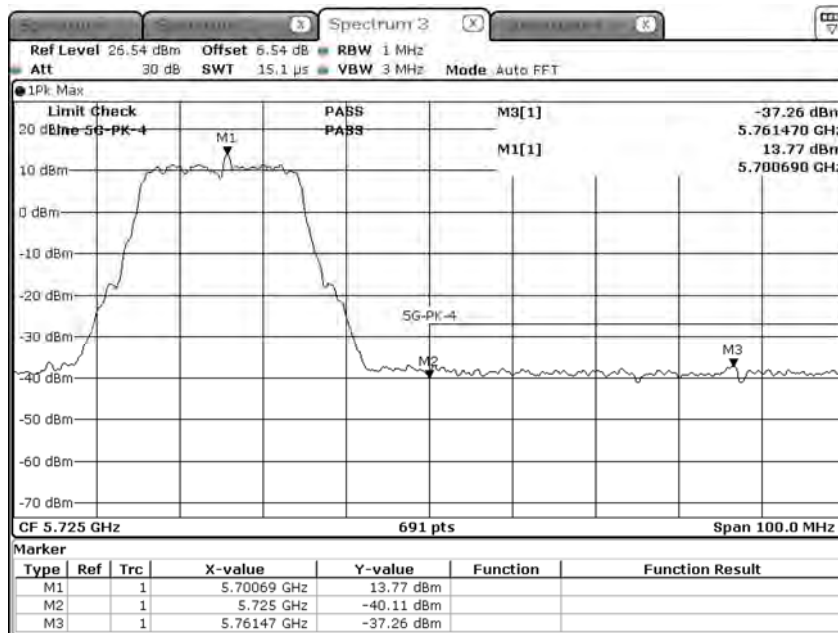


Date: 27.NOV.2020 16:42:15

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/27
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5745MHz)

Chain A


Peak:

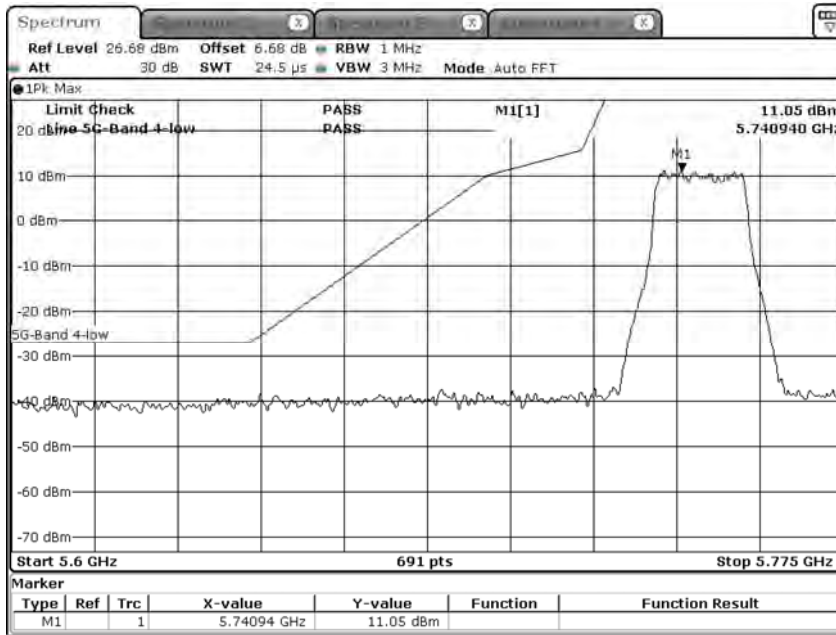

Date: 27.NOV.2020 16:08:54

Chain B

Peak:

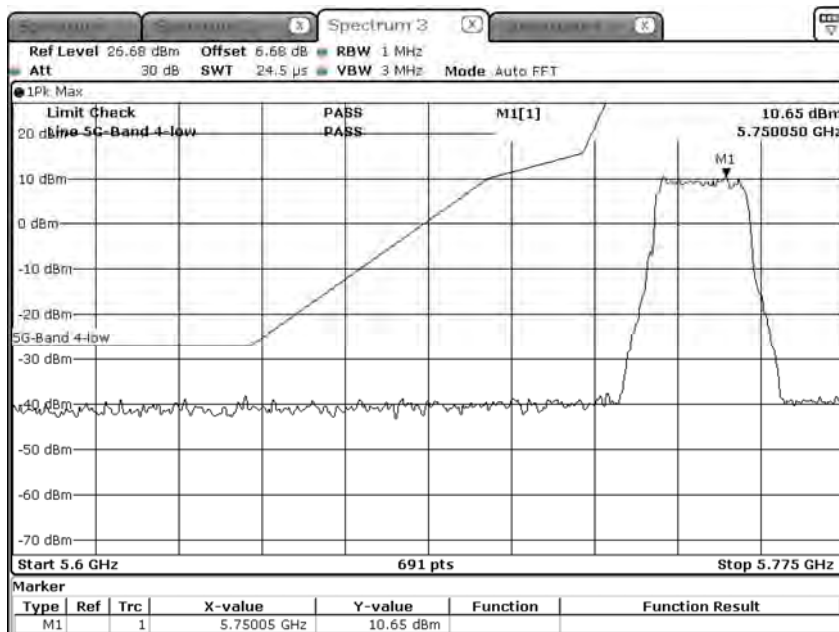


Date: 27.NOV.2020 16:44:52

Product : Notebook Computers
 Test Item : Band Edge Data
 Test Date : 2020/11/27
 Test Mode : Mode 23: MIMO Transmit (802.11ax-20BW_17.2Mbps) (5825MHz)

Chain A


Peak:

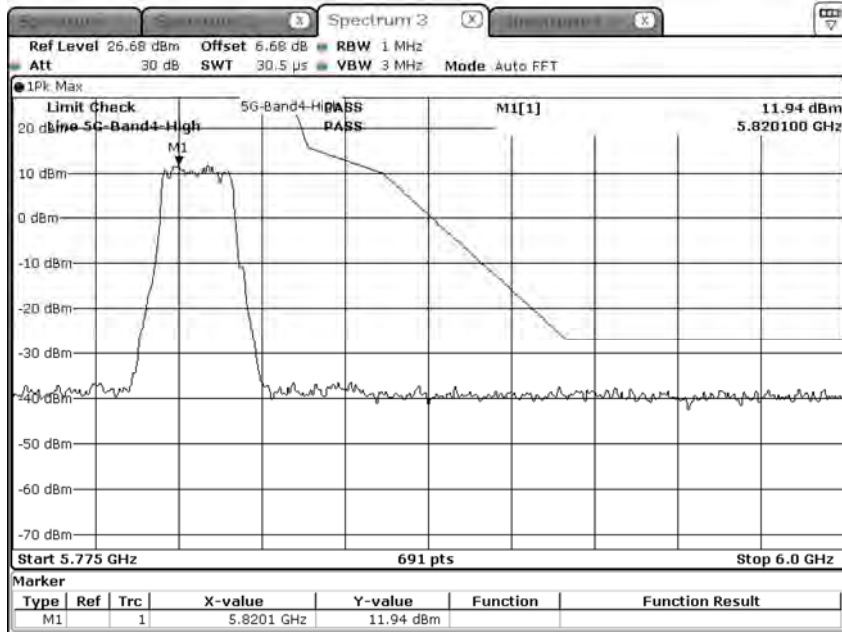

Date: 27.NOV.2020 16:13:13

Chain B

Peak:

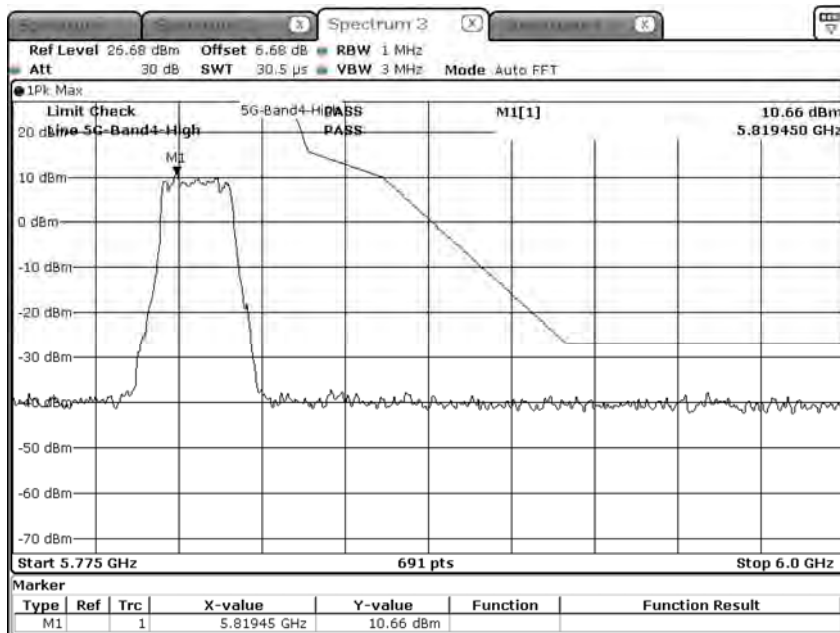

Date: 27.NOV.2020 16:46:48