

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2019/09/19 ~ 25, 2020/10/30~11/02	Temp./Hum.	24~25°C/50~54%, 23°C/51~55%
Cable Loss	0.5dB	Tested By	Sean Wang/Kuper Hsu
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.4.1 Peak Output Power

SPOT CHECK

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11b	2412	21.66	21.83	21.83	0.152
	2417	22.31	22.45	22.45	0.176
	2442	22.46	22.48	22.48	0.177
	2457	22.20	22.47	22.47	0.177
	2462	21.59	21.59	21.59	0.144
	2467	20.77	20.67	20.77	0.119
	2472	15.70	15.54	15.70	0.037

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11g	2412	21.59	21.80	21.80	0.151
	2417	22.51	22.39	22.51	0.178
	2442	23.66	23.73	23.73	0.236
	2457	22.69	22.67	22.69	0.186
	2462	22.13	22.03	22.13	0.163
	2467	19.85	19.68	19.85	0.097
	2472	12.83	12.27	12.83	0.019

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11n- HT20	2412	19.06	19.20	22.14	0.164
	2417	20.17	20.16	23.18	0.208
	2442	22.09	21.91	25.01	0.317
	2457	20.41	20.39	23.41	0.219
	2462	19.64	19.45	22.56	0.180
	2467	17.02	16.94	19.99	0.100
	2472	10.08	9.72	12.91	0.020

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11n- HT40	2422	19.28	19.20	22.25	0.168
	2427	18.31	18.17	21.25	0.133
	2442	19.99	19.83	22.92	0.196
	2447	19.95	19.93	22.95	0.197
	2452	18.60	18.72	21.67	0.147
	2457	15.30	15.17	18.25	0.067
	2462	12.08	11.01	14.59	0.029

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11ax- HE20	2412	18.86	19.23	22.06	0.161
	2417	20.20	20.12	23.17	0.207
	2442	21.90	22.01	24.97	0.314
	2457	20.38	20.20	23.30	0.214
	2462	19.59	19.56	22.59	0.182
	2467	16.90	17.03	19.98	0.100
	2472	10.23	9.91	13.08	0.020

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE40	2422	18.98	19.12	22.06	0.161
	2427	18.04	17.85	20.96	0.125
	2442	19.87	19.84	22.87	0.194
	2447	19.78	19.68	22.74	0.188
	2452	18.35	18.34	21.36	0.137
	2457	15.13	14.88	18.02	0.063
	2462	11.97	10.59	14.34	0.027

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
			Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE20	26/0	2412	23.66	23.63	26.66	0.463
	52/37		23.73	23.59	26.67	0.465
	106/53		22.69	22.55	25.63	0.366
	26/8	2472	10.28	10.79	13.55	0.023
	52/40		10.20	10.96	13.61	0.023
	106/54		10.27	10.98	13.65	0.023

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
			Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE40	242/61	2422	24.16	23.05	26.65	0.462
	242/62	2467	13.62	14.32	16.99	0.050

- Note: 1. The results have been included cable loss.
 2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
BLE (1M)	2402	4.70	---	4.70	0.0030
	2440	5.06	---	5.06	0.0032
	2480	5.70	---	5.70	0.0037
BLE (2M)	2402	4.73	---	4.73	0.0030
	2440	5.17	---	5.17	0.0032
	2480	5.68	---	5.68	0.0037
BLE (PHY Coded S2)	2402	4.67	---	4.67	0.0030
	2440	5.04	---	5.04	0.0032
	2480	5.66	---	5.66	0.0037
BLE (PHY Coded S8)	2402	4.65	---	4.65	0.0030
	2440	5.36	---	5.36	0.0032
	2480	4.64	---	4.64	0.0037

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Test SKU: SKU #1

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11b	2412	21.72	21.89	21.89	0.155	6.3	28.19	0.659	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2417	22.40	22.43	22.43	0.175		28.73	0.746	
	2442	22.53	22.52	22.53	0.179		28.83	0.764	
	2457	22.52	22.41	22.52	0.179		28.82	0.762	
	2462	21.61	21.55	21.61	0.145		27.91	0.618	
	2467	20.72	20.65	20.72	0.118		27.02	0.504	
	2472	15.64	15.56	15.64	0.037		21.94	0.156	

Note: 1. The results have been included cable loss.

2. The Peak Output Power limit (dBm)=30-(6.3-6)=29.7 ; The EIRP limit=36-(6.3-6)=35.7

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11g	2412	21.59	21.78	21.78	0.151	6.3	28.08	0.643	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2417	22.49	22.46	22.49	0.177		28.79	0.757	
	2442	23.71	23.81	23.81	0.240		30.11	1.026	
	2457	22.77	22.64	22.77	0.189		29.07	0.807	
	2462	22.14	22.05	22.14	0.164		28.44	0.698	
	2467	19.81	19.79	19.81	0.096		26.11	0.408	
	2472	12.92	12.29	12.92	0.020		19.22	0.084	

Note: 1. The results have been included cable loss.

2. The Peak Output Power limit (dBm)=30-(6.3-6)=29.7 ; The EIRP limit=36-(6.3-6)=35.7

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n- HT20	2412	19.04	19.25	22.16	0.164	6.3	28.46	0.701	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2417	20.21	20.11	23.17	0.207		29.47	0.885	
	2442	22.01	21.96	25.00	0.316		31.30	1.349	
	2457	20.38	20.34	23.37	0.217		29.67	0.927	
	2462	19.65	19.51	22.59	0.182		28.89	0.774	
	2467	17.11	17.01	20.07	0.102		26.37	0.434	
	2472	10.01	9.81	12.92	0.020		19.22	0.084	

Note: 1. The results have been included cable loss.

2. The Peak Output Power limit (dBm)=30-(6.3-6)=29.7 ; The EIRP limit=36-(6.3-6)=35.7

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	19.32	19.22	22.28	0.169	6.3	28.58	0.721	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2427	18.22	18.17	21.21	0.132		27.51	0.564	
	2442	19.96	19.82	22.90	0.195		29.20	0.832	
	2447	19.98	19.93	22.97	0.198		29.27	0.845	
	2452	18.69	18.64	21.68	0.147		27.98	0.628	
	2457	15.36	15.14	18.26	0.067		24.56	0.286	
	2462	12.02	11.02	14.56	0.029		20.86	0.122	

Note: 1. The results have been included cable loss.

2. The Peak Output Power limit (dBm)=30-(6.3-6)=29.7 ; The EIRP limit=36-(6.3-6)=35.7

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	18.98	19.22	22.11	0.163	6.3	28.41	0.693	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2417	20.23	20.17	23.21	0.209		29.51	0.893	
	2442	21.93	21.95	24.95	0.313		31.25	1.334	
	2457	20.40	20.21	23.32	0.215		29.62	0.916	
	2462	19.63	19.53	22.59	0.182		28.89	0.774	
	2467	16.98	17.04	20.02	0.100		26.32	0.429	
	2472	10.21	9.91	13.07	0.020		19.37	0.086	

Note: 1. The results have been included cable loss.

2. The Peak Output Power limit (dBm)=30-(6.3-6)=29.7 ; The EIRP limit=36-(6.3-6)=35.7

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	19.08	19.13	22.12	0.163	6.3	28.42	0.695	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2427	18.02	17.94	20.99	0.126		27.29	0.536	
	2442	19.84	19.79	22.83	0.192		29.13	0.818	
	2447	19.81	19.73	22.78	0.190		29.08	0.809	
	2452	18.35	18.41	21.39	0.138		27.69	0.587	
	2457	15.11	14.94	18.04	0.064		24.34	0.272	
	2462	11.93	10.60	14.33	0.027		20.63	0.116	

Note: The results have been included cable loss.

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	23.52	23.65	26.60	0.457	6.3	32.90	1.950	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	52/37		23.55	23.62	26.60	0.457		32.90	1.950	
	106/53		23.42	23.67	26.56	0.453		32.86	1.932	
	26/8	2472	10.74	10.07	13.43	0.022		19.73	0.094	
	52/40		10.93	10.11	13.55	0.023		19.85	0.097	
	106/54		10.97	10.24	13.63	0.023		19.93	0.098	

Note: The results have been included cable loss.

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	23.44	23.65	26.56	0.453	6.3	32.86	1.932	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	242/62	2467	14.18	14.08	17.14	0.052		23.44	0.221	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
BLE (1M)	2402	4.85	---	4.85	0.0031	3.4	8.25	0.0067	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2440	5.37	---	5.37	0.0034		8.77	0.0075	
	2480	4.66	---	4.66	0.0029		8.06	0.0064	
BLE (2M)	2402	4.84	---	4.84	0.0030		8.24	0.0067	
	2440	5.37	---	5.37	0.0034		8.77	0.0075	
	2480	4.66	---	4.66	0.0029		8.06	0.0064	
BLE (PHY Coded S2)	2402	4.82	---	4.82	0.0030		8.22	0.0066	
	2440	5.36	---	5.36	0.0034		8.76	0.0075	
	2480	4.65	---	4.65	0.0029		8.05	0.0064	
BLE (PHY Coded S8)	2402	4.82	---	4.82	0.0030		8.22	0.0066	
	2440	5.36	---	5.36	0.0034		8.76	0.0075	
	2480	4.65	---	4.65	0.0029		8.05	0.0064	

Note: The results have been included cable loss.

Test SKU: SKU #2

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11b	2412	21.72	21.89	21.89	0.155	2.0	23.89	0.245	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	22.40	22.43	22.43	0.175		24.43	0.277	
	2442	22.53	22.52	22.53	0.179		24.53	0.284	
	2457	22.52	22.41	22.52	0.179		24.52	0.283	
	2462	21.61	21.55	21.61	0.145		23.61	0.230	
	2467	20.72	20.65	20.72	0.118		22.72	0.187	
	2472	15.64	15.56	15.64	0.037		17.64	0.058	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11g	2412	21.59	21.78	21.78	0.151	2.0	23.78	0.239	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	22.49	22.46	22.49	0.177		24.49	0.281	
	2442	23.71	23.81	23.81	0.240		25.81	0.381	
	2457	22.77	22.64	22.77	0.189		24.77	0.300	
	2462	22.14	22.05	22.14	0.164		24.14	0.259	
	2467	19.81	19.79	19.81	0.096		21.81	0.152	
	2472	12.92	12.29	12.92	0.020		14.92	0.031	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n- HT20	2412	19.04	19.25	22.16	0.164	2.0	24.16	0.261	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	20.21	20.11	23.17	0.207		25.17	0.329	
	2442	22.01	21.96	25.00	0.316		27.00	0.501	
	2457	20.38	20.34	23.37	0.217		25.37	0.344	
	2462	19.65	19.51	22.59	0.182		24.59	0.288	
	2467	17.11	17.01	20.07	0.102		22.07	0.161	
	2472	10.01	9.81	12.92	0.020		14.92	0.031	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	19.32	19.22	22.28	0.169	2.0	24.28	0.268	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	18.22	18.17	21.21	0.132		23.21	0.209	
	2442	19.96	19.82	22.90	0.195		24.90	0.309	
	2447	19.98	19.93	22.97	0.198		24.97	0.314	
	2452	18.69	18.64	21.68	0.147		23.68	0.233	
	2457	15.36	15.14	18.26	0.067		20.26	0.106	
	2462	12.02	11.02	14.56	0.029		16.56	0.045	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	18.98	19.22	22.11	0.163	2.0	24.11	0.258	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	20.23	20.17	23.21	0.209		25.21	0.332	
	2442	21.93	21.95	24.95	0.313		26.95	0.495	
	2457	20.40	20.21	23.32	0.215		25.32	0.340	
	2462	19.63	19.53	22.59	0.182		24.59	0.288	
	2467	16.98	17.04	20.02	0.100		22.02	0.159	
	2472	10.21	9.91	13.07	0.020		15.07	0.032	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	19.08	19.13	22.12	0.163	2.0	24.12	0.258	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	18.02	17.94	20.99	0.126		22.99	0.199	
	2442	19.84	19.79	22.83	0.192		24.83	0.304	
	2447	19.81	19.73	22.78	0.190		24.78	0.301	
	2452	18.35	18.41	21.39	0.138		23.39	0.218	
	2457	15.11	14.94	18.04	0.064		20.04	0.101	
	2462	11.93	10.60	14.33	0.027		16.33	0.043	

Note: The results have been included cable loss.

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	23.52	23.65	26.60	0.457	2.0	28.60	0.724	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		23.55	23.62	26.60	0.457		28.60	0.724	
	106/53		23.42	23.67	26.56	0.453		28.56	0.718	
	26/8	2472	10.74	10.07	13.43	0.022		15.43	0.035	
	52/40		10.93	10.11	13.55	0.023		15.55	0.036	
	106/54		10.97	10.24	13.63	0.023		15.63	0.037	

Note: The results have been included cable loss.

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	23.44	13.65	23.87	0.244	2.0	25.87	0.386	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	14.18	14.08	17.14	0.052		19.14	0.082	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
BLE (1M)	2402	4.85	---	4.85	0.0031	1.9	6.75	0.0047	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2440	5.37	---	5.37	0.0034		7.27	0.0053	
	2480	4.66	---	4.66	0.0029		6.56	0.0045	
BLE (2M)	2402	4.84	---	4.84	0.0030		6.74	0.0047	
	2440	5.37	---	5.37	0.0034		7.27	0.0053	
	2480	4.66	---	4.66	0.0029		6.56	0.0045	
BLE (PHY Coded S2)	2402	4.82	---	4.82	0.0030		6.72	0.0047	
	2440	5.36	---	5.36	0.0034		7.26	0.0053	
	2480	4.65	---	4.65	0.0029		6.55	0.0045	
BLE (PHY Coded S8)	2402	4.82	---	4.82	0.0030		6.72	0.0047	
	2440	5.36	---	5.36	0.0034		7.26	0.0053	
	2480	4.65	---	4.65	0.0029		6.55	0.0045	

Note: The results have been included cable loss.

A.4.2 Average Output Power (Reporting only)

SPOT CHECK

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11b	2412	18.96	19.36	0	19.36	0.086
	2417	19.63	19.91		19.91	0.098
	2442	19.57	20.04		20.04	0.101
	2457	19.70	20.00		20.00	0.100
	2462	19.12	18.97		19.12	0.082
	2467	17.35	17.98		17.98	0.063
	2472	12.36	13.08		13.08	0.020

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11g	2412	16.71	16.90	0	16.90	0.049
	2417	17.95	17.94		17.95	0.062
	2442	19.68	19.66		19.68	0.093
	2457	18.16	18.11		18.16	0.065
	2462	17.44	17.45		17.45	0.056
	2467	14.81	14.76		14.81	0.030
	2472	1.47	1.28		1.47	0.001

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11n-HT20	2412	14.19	14.21	0	17.21	0.053
	2417	15.48	15.30		18.40	0.069
	2442	17.41	17.10		20.27	0.106
	2457	15.74	15.53		18.65	0.073
	2462	14.83	14.59		17.72	0.059
	2467	12.09	11.76		14.94	0.031
	2472	-0.04	-0.82		2.60	0.002

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11n-HT40	2422	13.82	13.76	0	16.80	0.048
	2427	12.74	12.71		15.74	0.037
	2442	14.61	14.55		17.59	0.057
	2447	14.78	14.83		17.82	0.061
	2452	13.11	13.13		16.13	0.041
	2457	9.50	9.44		12.48	0.018
	2462	1.32	0.64		4.00	0.003

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE20	2412	13.92	14.14	0	17.04	0.051
	2417	15.25	15.25		18.26	0.067
	2442	17.03	17.03		20.04	0.101
	2457	15.51	15.36		18.45	0.070
	2462	14.65	14.54		17.61	0.058
	2467	11.75	11.78		14.78	0.030
	2472	-0.10	-0.97		2.50	0.002

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE40	2422	13.62	13.69	0	16.67	0.046
	2427	12.64	12.48		15.57	0.036
	2442	14.47	14.51		17.50	0.056
	2447	14.47	14.43		17.46	0.056
	2452	12.84	12.96		15.91	0.039
	2457	9.25	9.23		12.25	0.017
	2462	1.05	0.16		3.64	0.002

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
			Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE20	26/0	2412	13.83	13.58	0	16.72	0.047
	52/37		13.85	13.71		16.79	0.048
	106/53		12.88	12.59		15.75	0.038
	26/8	2472	-2.23	-1.96		0.92	0.001
	52/40		-2.11	-1.67		1.13	0.001
	106/54		-1.99	-1.55		1.25	0.001

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
			Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE40	242/61	2422	13.56	13.20	0	16.39	0.044
	242/62	2467	0.94	-0.26		3.39	0.002

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Test SKU: SKU #1

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11b	2412	19.16	19.35	0	19.35	0.086	6.3	25.65	0.367	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2417	19.91	19.96		19.96	0.099		26.26	0.423	
	2442	20.04	20.02		20.04	0.101		26.34	0.431	
	2457	20.02	19.95		20.02	0.100		26.32	0.429	
	2462	19.08	18.91		19.08	0.081		25.38	0.345	
	2467	18.18	18.08		18.18	0.066		24.48	0.281	
	2472	13.08	13.05		13.08	0.020		19.38	0.087	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11g	2412	16.72	16.91	0	16.91	0.049	6.3	23.21	0.209	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2417	17.94	17.90		17.94	0.062		24.24	0.265	
	2442	19.63	19.74		19.74	0.094		26.04	0.402	
	2457	18.21	18.05		18.21	0.066		24.51	0.282	
	2462	17.47	17.37		17.47	0.056		23.77	0.238	
	2467	14.79	14.78		14.79	0.030		21.09	0.129	
	2472	1.52	1.28		1.52	0.001		7.82	0.006	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	14.01	14.23	0	17.13	0.052	6.3	23.43	0.220	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2417	15.45	15.38		18.43	0.070		24.73	0.297	
	2442	17.15	17.13		20.15	0.104		26.45	0.442	
	2457	15.63	15.55		18.60	0.072		24.90	0.309	
	2462	14.83	14.63		17.74	0.059		24.04	0.254	
	2467	11.95	11.84		14.91	0.031		21.21	0.132	
	2472	-0.04	-0.86		2.58	0.002		8.88	0.008	

Note: 1. The results have been included cable loss.

2. The Peak Output Power limit (dBm)=30-(6.3-6)=29.7 ; The EIRP limit=36-(6.3-6)=35.7

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	13.83	13.81	0	16.83	0.048	6.3	23.13	0.206	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2427	12.80	12.73		15.78	0.038		22.08	0.161	
	2442	14.65	14.59		17.63	0.058		23.93	0.247	
	2447	14.78	14.73		17.77	0.060		24.07	0.255	
	2452	13.14	13.22		16.19	0.042		22.49	0.177	
	2457	9.53	9.42		12.49	0.018		18.79	0.076	
	2462	1.41	0.54		4.01	0.003		10.31	0.011	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	13.92	14.12	0	17.03	0.050	6.3	23.33	0.215	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2417	15.28	15.22		18.26	0.067		24.56	0.286	
	2442	17.03	17.05		20.05	0.101		26.35	0.432	
	2457	15.56	15.39		18.49	0.071		24.79	0.301	
	2462	14.68	14.58		17.64	0.058		23.94	0.248	
	2467	11.78	11.79		14.80	0.030		21.10	0.129	
	2472	-0.11	-0.95		2.50	0.002		8.80	0.008	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	13.66	13.7	0	16.69	0.047	6.3	22.99	0.199	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	2427	12.61	12.49		15.56	0.036		21.86	0.153	
	2442	14.47	14.42		17.46	0.056		23.76	0.238	
	2447	14.58	14.55		17.58	0.057		23.88	0.244	
	2452	12.96	13.00		15.99	0.040		22.29	0.169	
	2457	9.28	9.24		12.27	0.017		18.57	0.072	
	2462	1.06	0.14		3.63	0.002		9.93	0.010	

Note: 1. The results have been included cable loss.

2. The Peak Output Power limit (dBm)=30-(6.3-6)=29.7 ; The EIRP limit=36-(6.3-6)=35.7

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	14.13	14.45	0	17.30	0.054	6.3	23.60	0.229	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	52/37		14.26	14.43		17.36	0.054		23.66	0.232	
	106/53		14.28	14.48		17.39	0.055		23.69	0.234	
	26/8	2472	-1.36	-2.57		1.09	0.001		7.39	0.005	
	52/40		-1.13	-2.29		1.34	0.001		7.64	0.006	
	106/54		-1.02	-2.05		1.51	0.001		7.81	0.006	

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	13.85	14.08	0	16.98	0.050	6.3	23.28	0.213	<29.7dBm (0.933W) (Maximum Peak Output Power) <35.7dBm (3.72W) (E.I.R.P)
	242/62	2467	1.27	1.17		4.23	0.003		10.53	0.011	

Note: 1. The results have been included cable loss.

2. The Peak Output Power limit (dBm)=30-(6.3-6)=29.7 ; The EIRP limit=36-(6.3-6)=35.7

Test SKU: SKU #2

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11b	2412	19.16	19.35	0	19.35	0.086	2.0	21.35	0.136	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	19.91	19.96		19.96	0.099		21.96	0.157	
	2442	20.04	20.02		20.04	0.101		22.04	0.160	
	2457	20.02	19.95		20.02	0.100		22.02	0.159	
	2462	19.08	18.91		19.08	0.081		21.08	0.128	
	2467	18.18	18.08		18.18	0.066		20.18	0.104	
	2472	13.08	13.05		13.08	0.020		15.08	0.032	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11g	2412	16.72	16.91	0	16.91	0.049	2.0	18.91	0.078	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	17.94	17.9		17.94	0.062		19.94	0.099	
	2442	19.63	19.74		19.74	0.094		21.74	0.149	
	2457	18.21	18.05		18.21	0.066		20.21	0.105	
	2462	17.47	17.37		17.47	0.056		19.47	0.089	
	2467	14.79	14.78		14.79	0.030		16.79	0.048	
	2472	1.52	1.28		1.52	0.001		3.52	0.002	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	14.01	14.23	0	17.13	0.052	2.0	19.13	0.082	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	15.45	15.38		18.43	0.070		20.43	0.110	
	2442	17.15	17.13		20.15	0.104		22.15	0.164	
	2457	15.63	15.55		18.60	0.072		20.60	0.115	
	2462	14.83	14.63		17.74	0.059		19.74	0.094	
	2467	11.95	11.84		14.91	0.031		16.91	0.049	
	2472	-0.04	-0.86		2.58	0.002		4.58	0.003	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	13.83	13.81	0	16.83	0.048	2.0	18.83	0.076	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	12.8	12.73		15.78	0.038		17.78	0.060	
	2442	14.65	14.59		17.63	0.058		19.63	0.092	
	2447	14.78	14.73		17.77	0.060		19.77	0.095	
	2452	13.14	13.22		16.19	0.042		18.19	0.066	
	2457	9.53	9.42		12.49	0.018		14.49	0.028	
	2462	1.41	0.54		4.01	0.003		6.01	0.004	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	13.92	14.12	17.03	0.050	2.0	19.03	0.080	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	15.28	15.22	18.26	0.067		20.26	0.106	
	2442	17.03	17.05	20.05	0.101		22.05	0.160	
	2457	15.56	15.39	18.49	0.071		20.49	0.112	
	2462	14.68	14.58	17.64	0.058		19.64	0.092	
	2467	11.78	11.79	14.80	0.030		16.80	0.048	
	2472	-0.11	-0.95	2.50	0.002		4.50	0.003	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	13.66	13.7	16.69	0.047	2.0	18.69	0.074	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	12.61	12.49	15.56	0.036		17.56	0.057	
	2442	14.47	14.42	17.46	0.056		19.46	0.088	
	2447	14.58	14.55	17.58	0.057		19.58	0.091	
	2452	12.96	13	15.99	0.040		17.99	0.063	
	2457	9.28	9.24	12.27	0.017		14.27	0.027	
	2462	1.06	0.14	3.63	0.002		5.63	0.004	

Note: The results have been included cable loss.


Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	14.13	14.45	0	17.30	0.054	2.0	19.30	0.085	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		14.26	14.43		17.36	0.054		19.36	0.086	
	106/53		14.28	14.48		17.39	0.055		19.39	0.087	
	26/8	2472	-1.36	-2.57		1.09	0.001		3.09	0.002	
	52/40		-1.13	-2.29		1.34	0.001		3.34	0.002	
	106/54		-1.02	-2.05		1.51	0.001		3.51	0.002	


Note: The results have been included cable loss.

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	13.85	14.08	0	16.98	0.050	2.0	18.98	0.079	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	1.27	1.17		4.23	0.003		6.23	0.004	

Note: The results have been included cable loss.


A.4.3 Measurement Plots

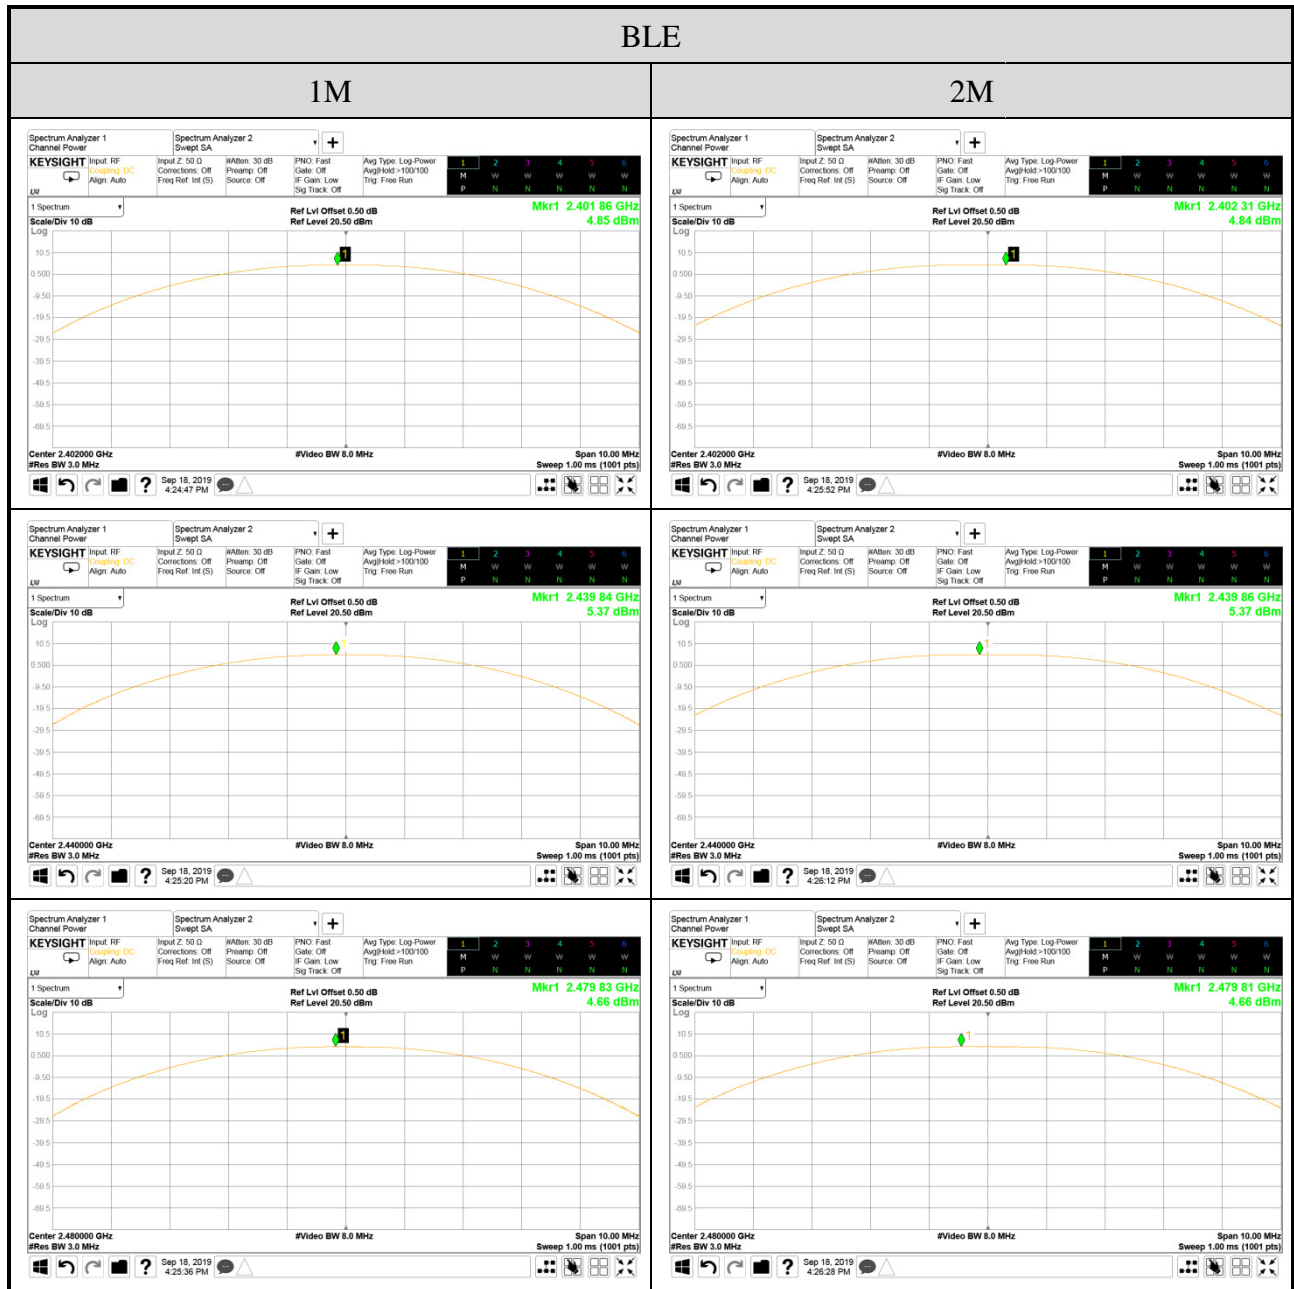

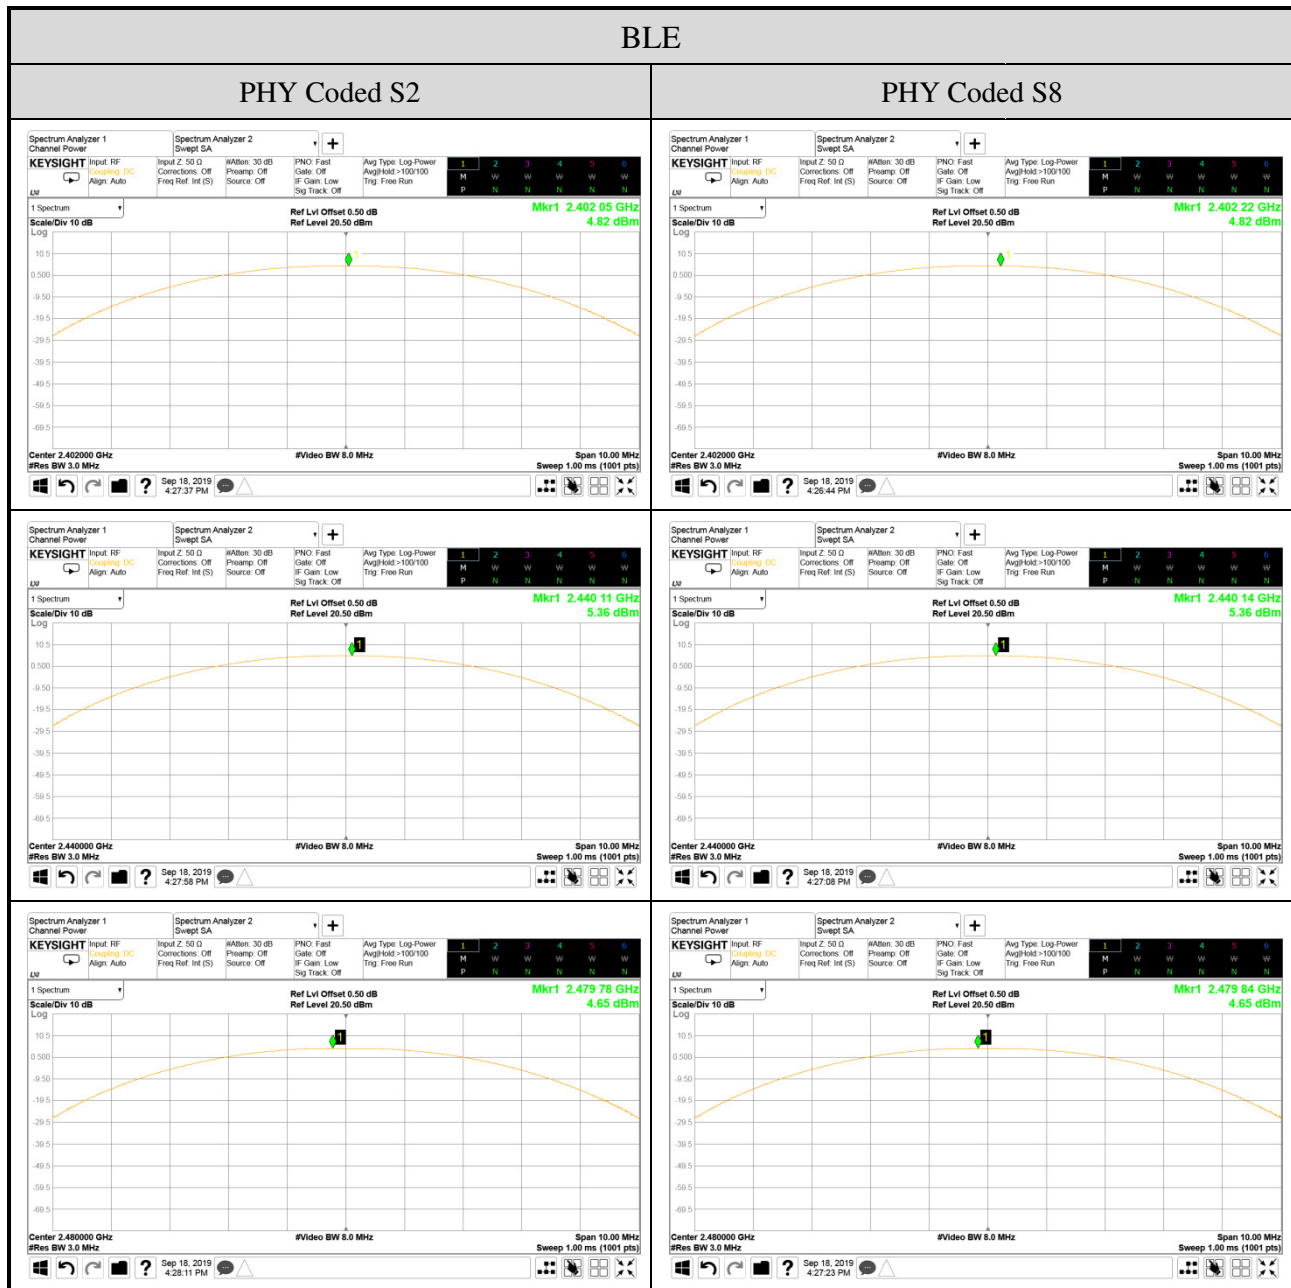

A.5 EMISSION LIMITATIONS





Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Martin Chen
Frequency	TX 2412MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

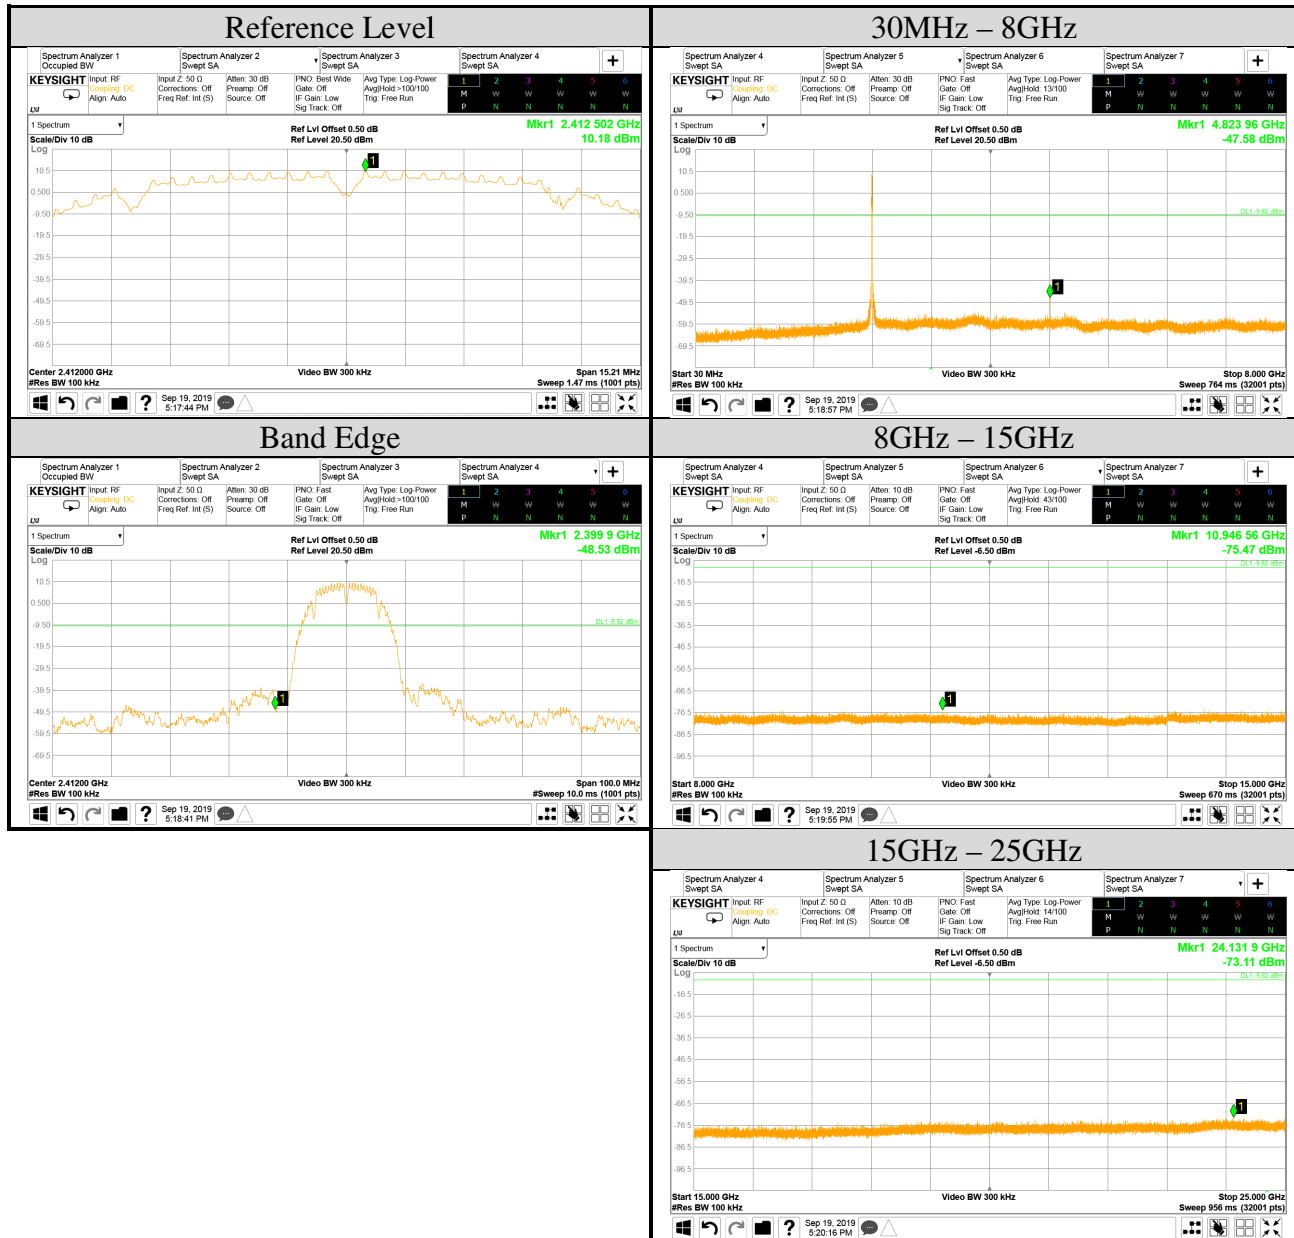


Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Martin Chen
Frequency	TX 2442MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

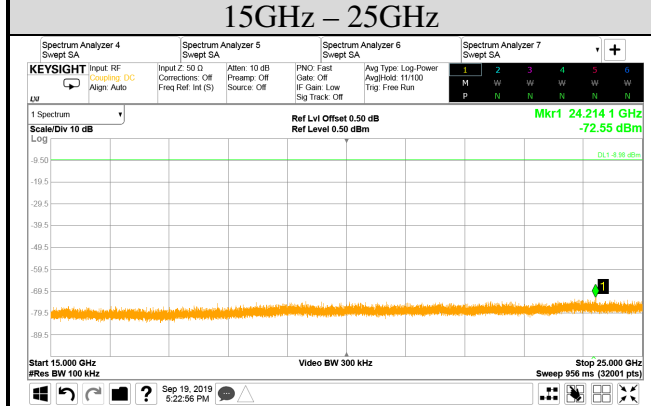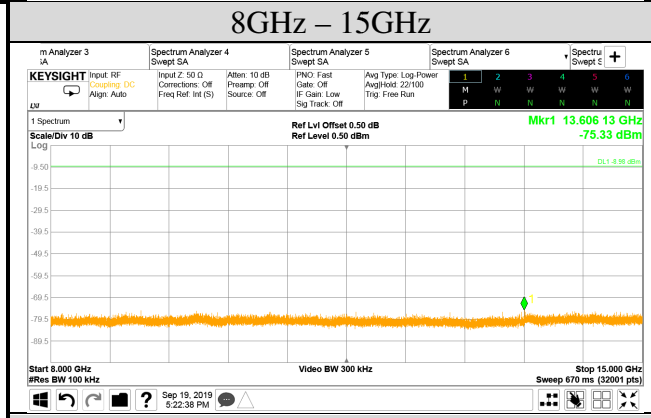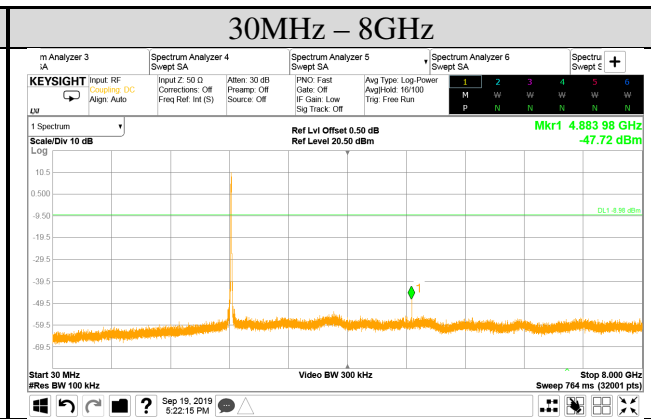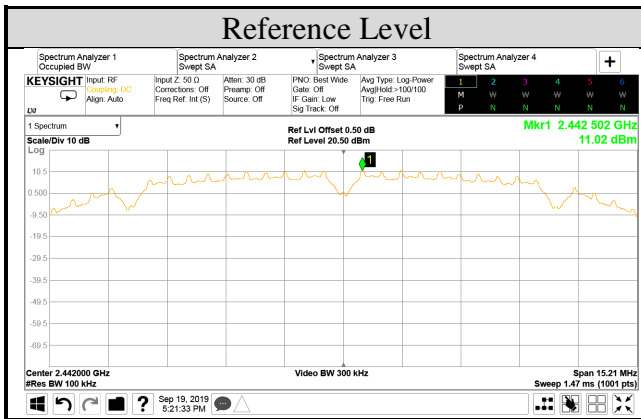


Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Martin Chen
Frequency	TX 2462MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

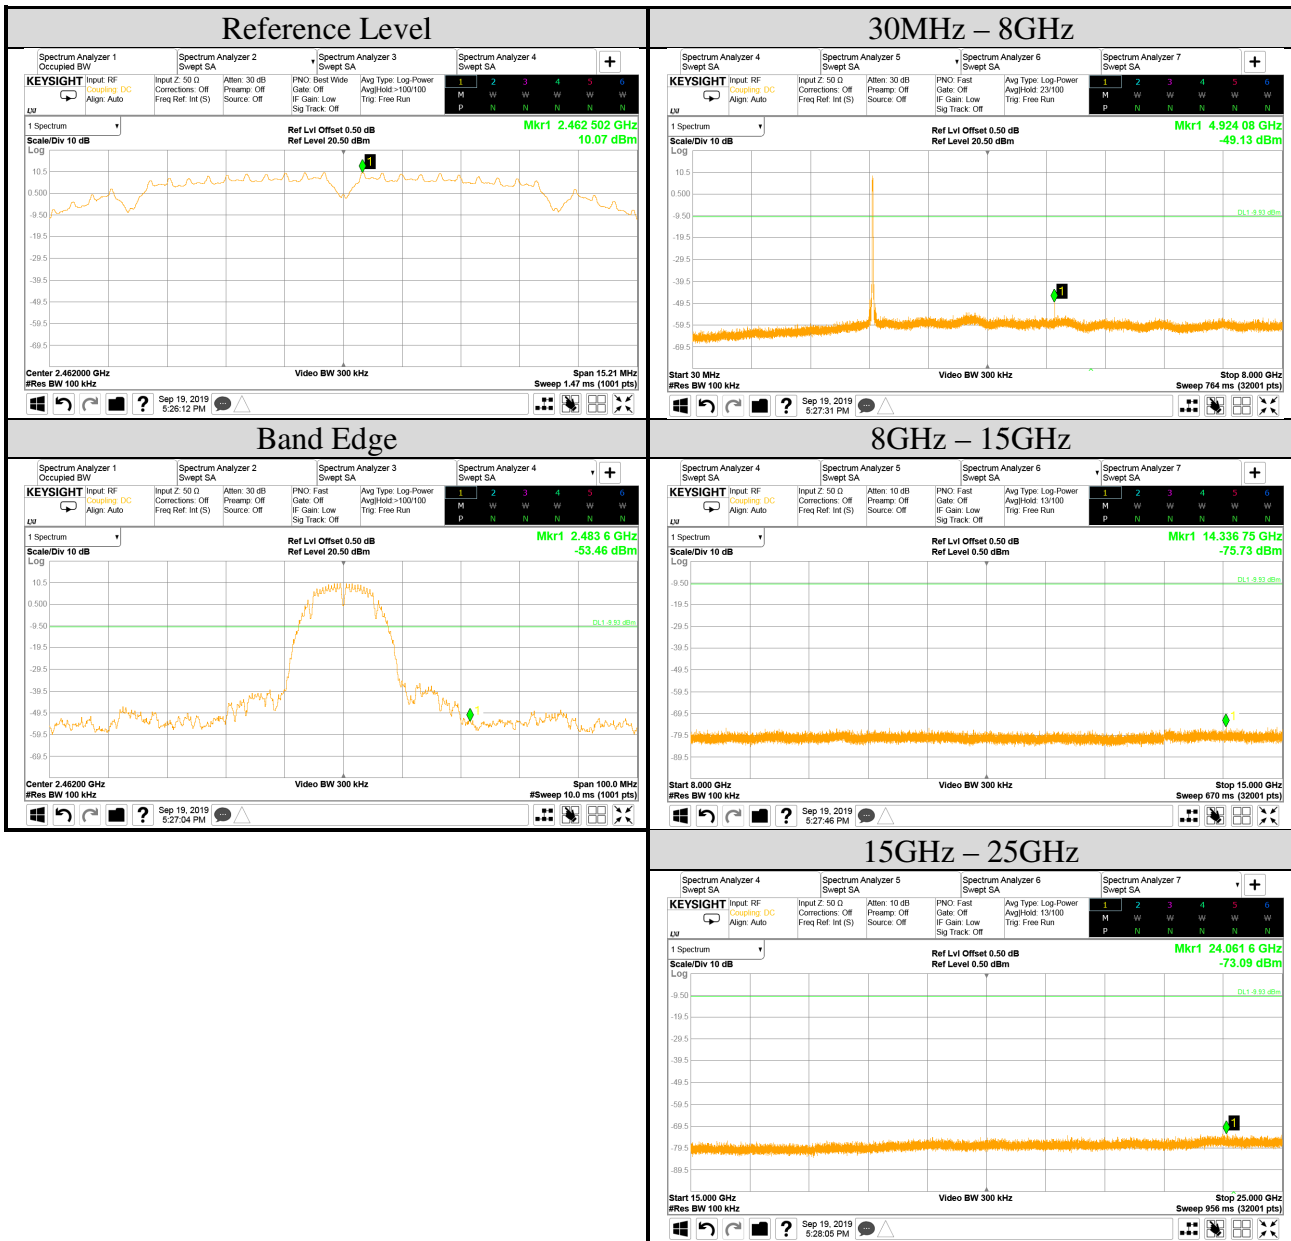

Test Date	2019/09/19 ~ 27	Temp./Hum.	24 ~ 25°C / 49 ~ 54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Martin Chen
Frequency	TX 2472MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

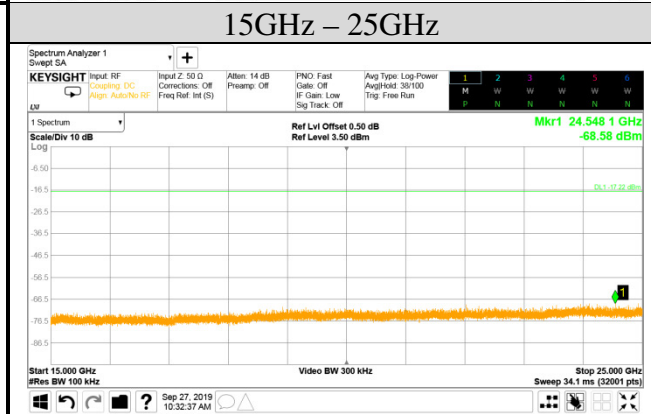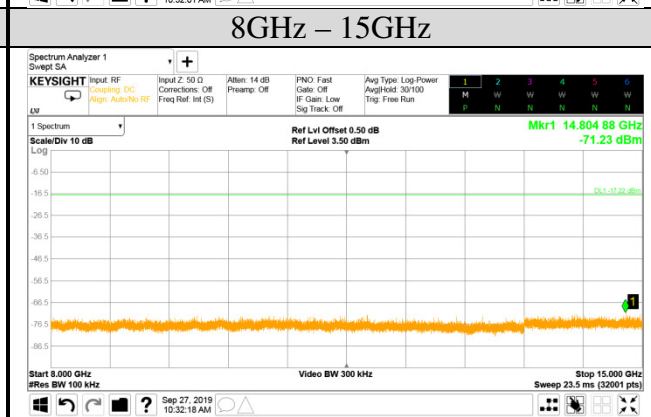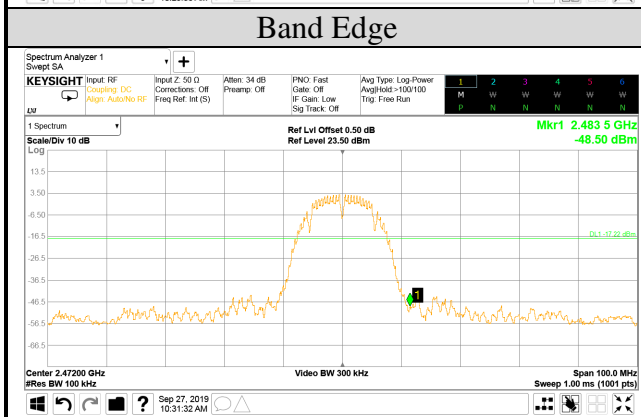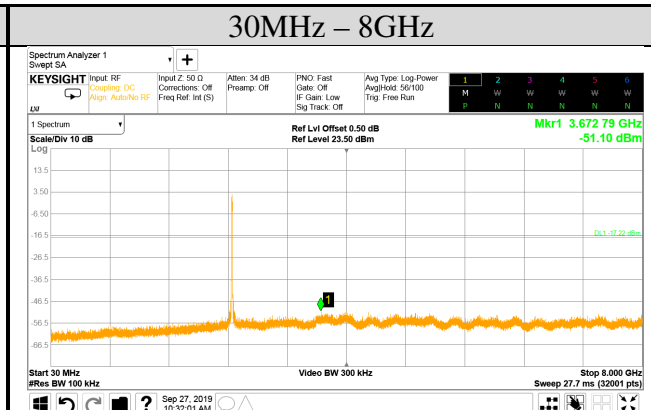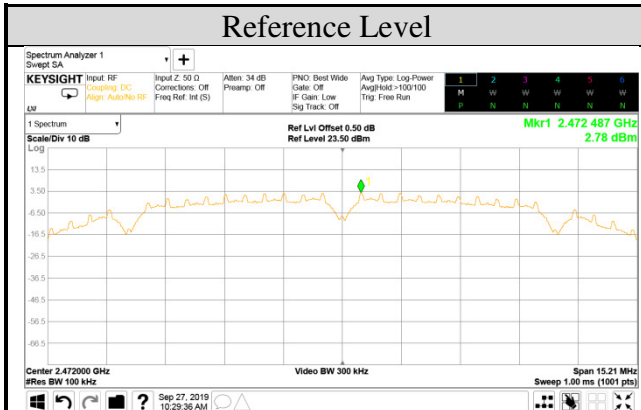





Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Martin Chen
Frequency	TX 2412MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

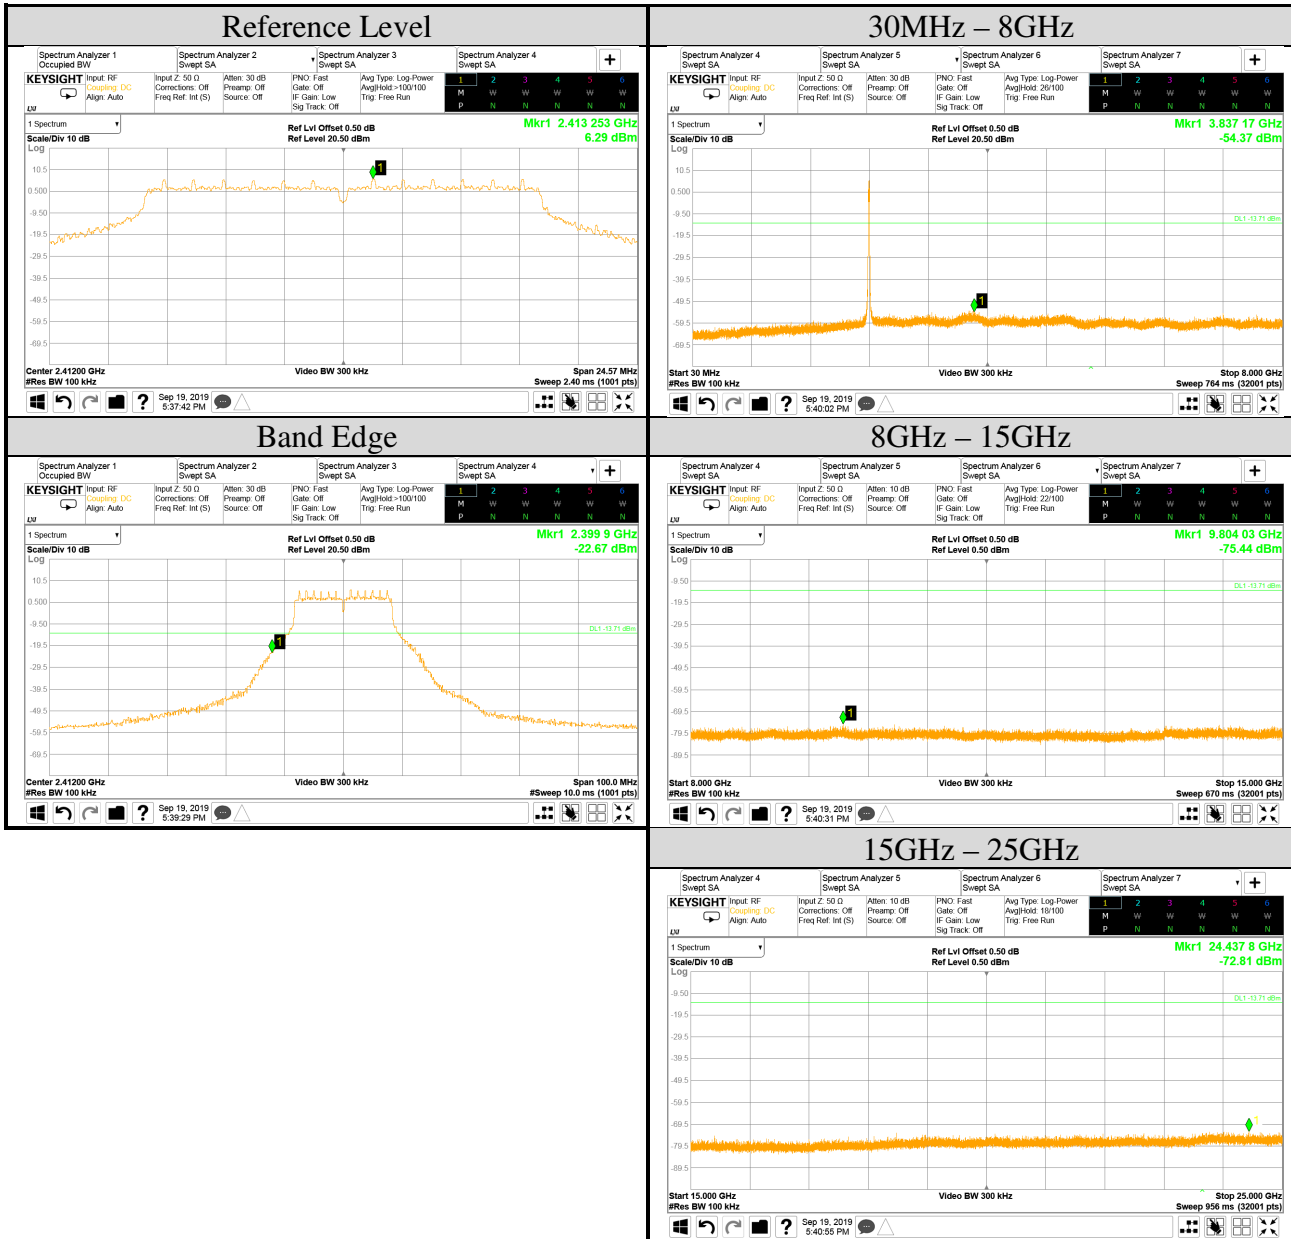






Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Martin Chen
Frequency	TX 2442MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

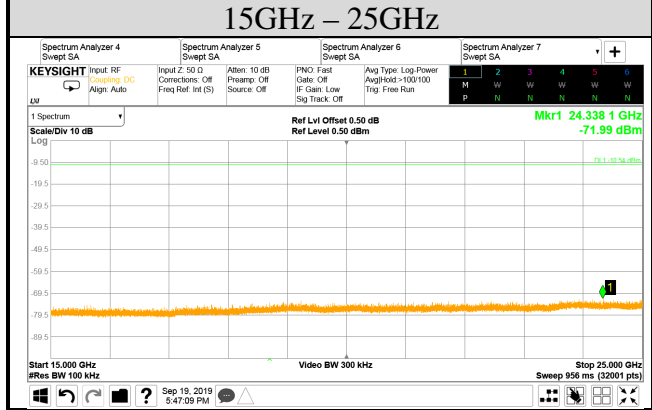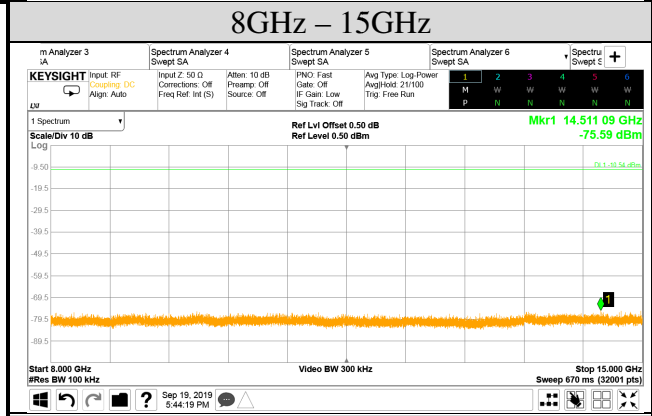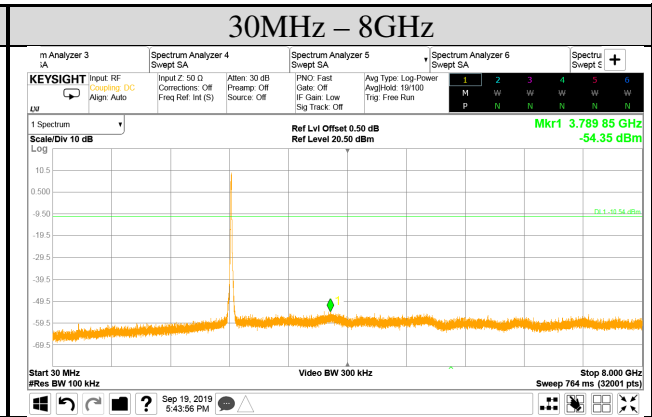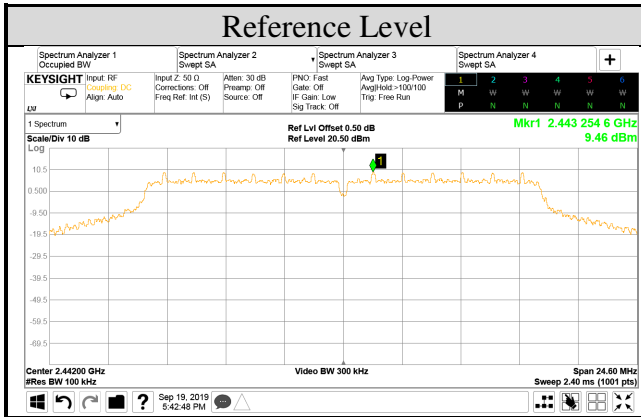

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Martin Chen
Frequency	TX 2462MHz		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			0

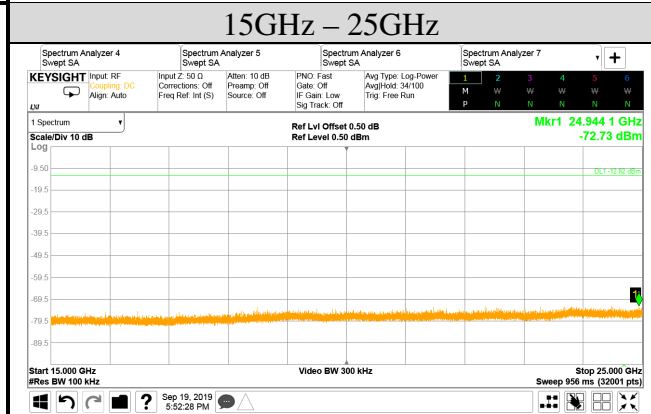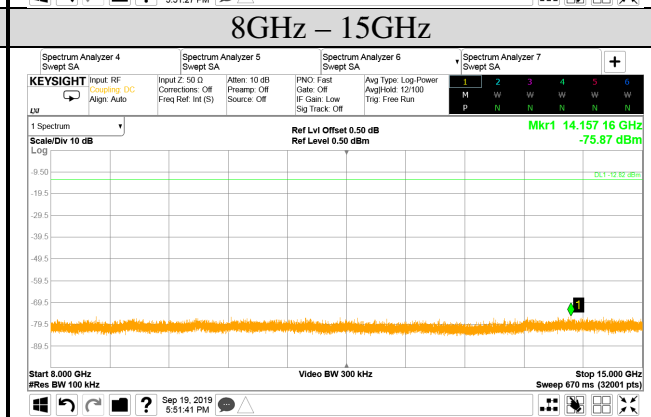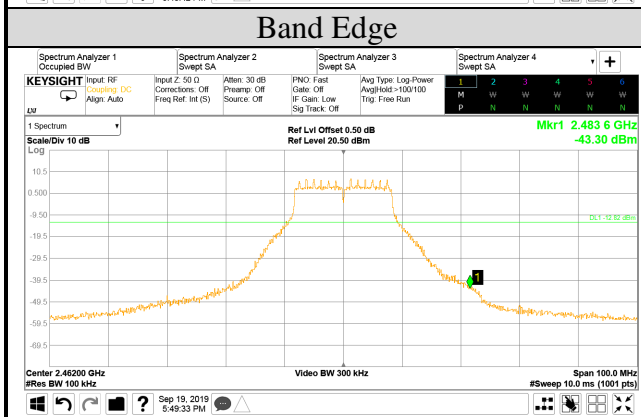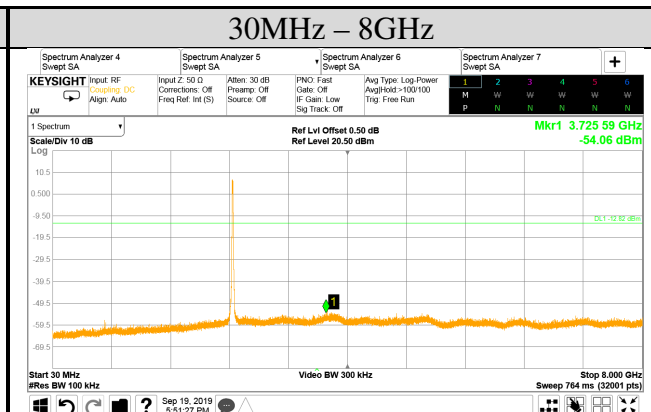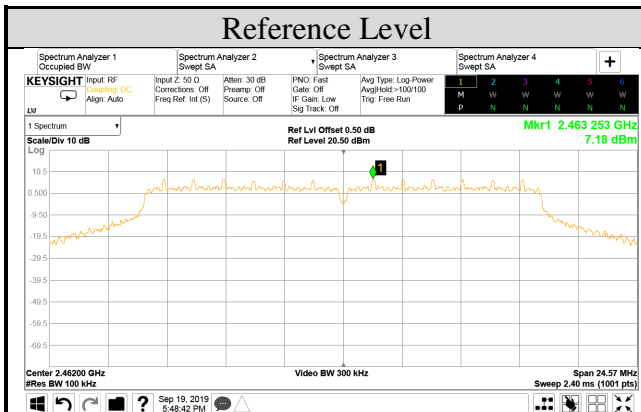


Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Martin Chen
Frequency	TX 2472MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

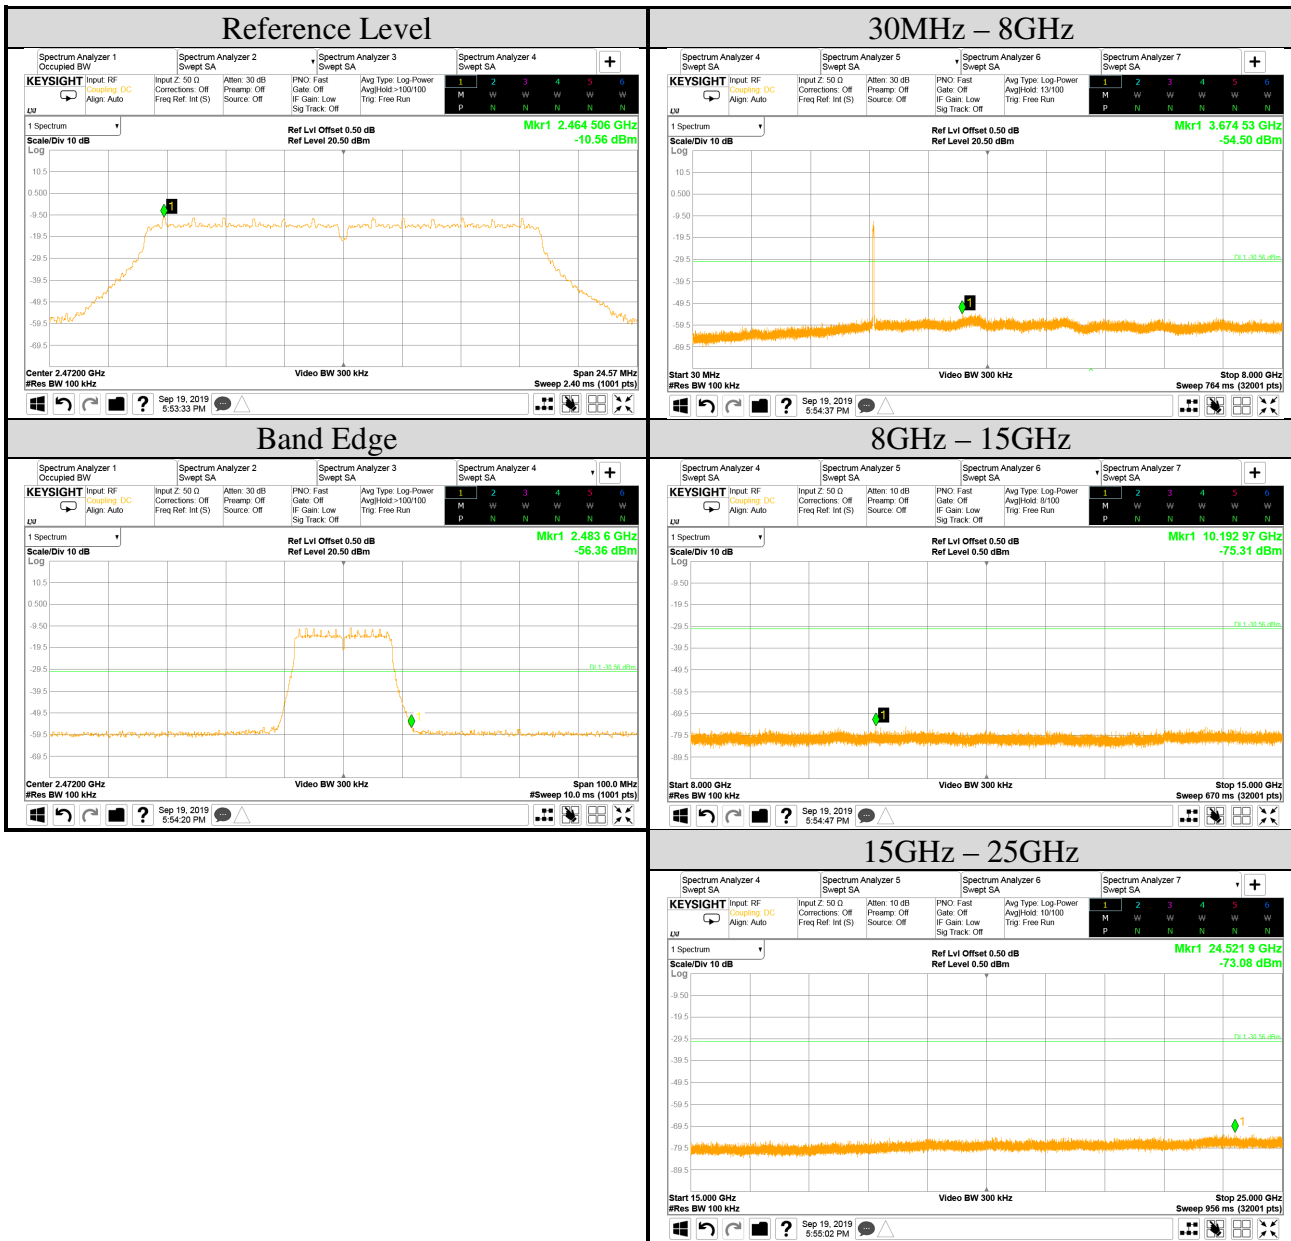

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303





Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Tested By	Martin Chen
Frequency	TX 2412MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			3

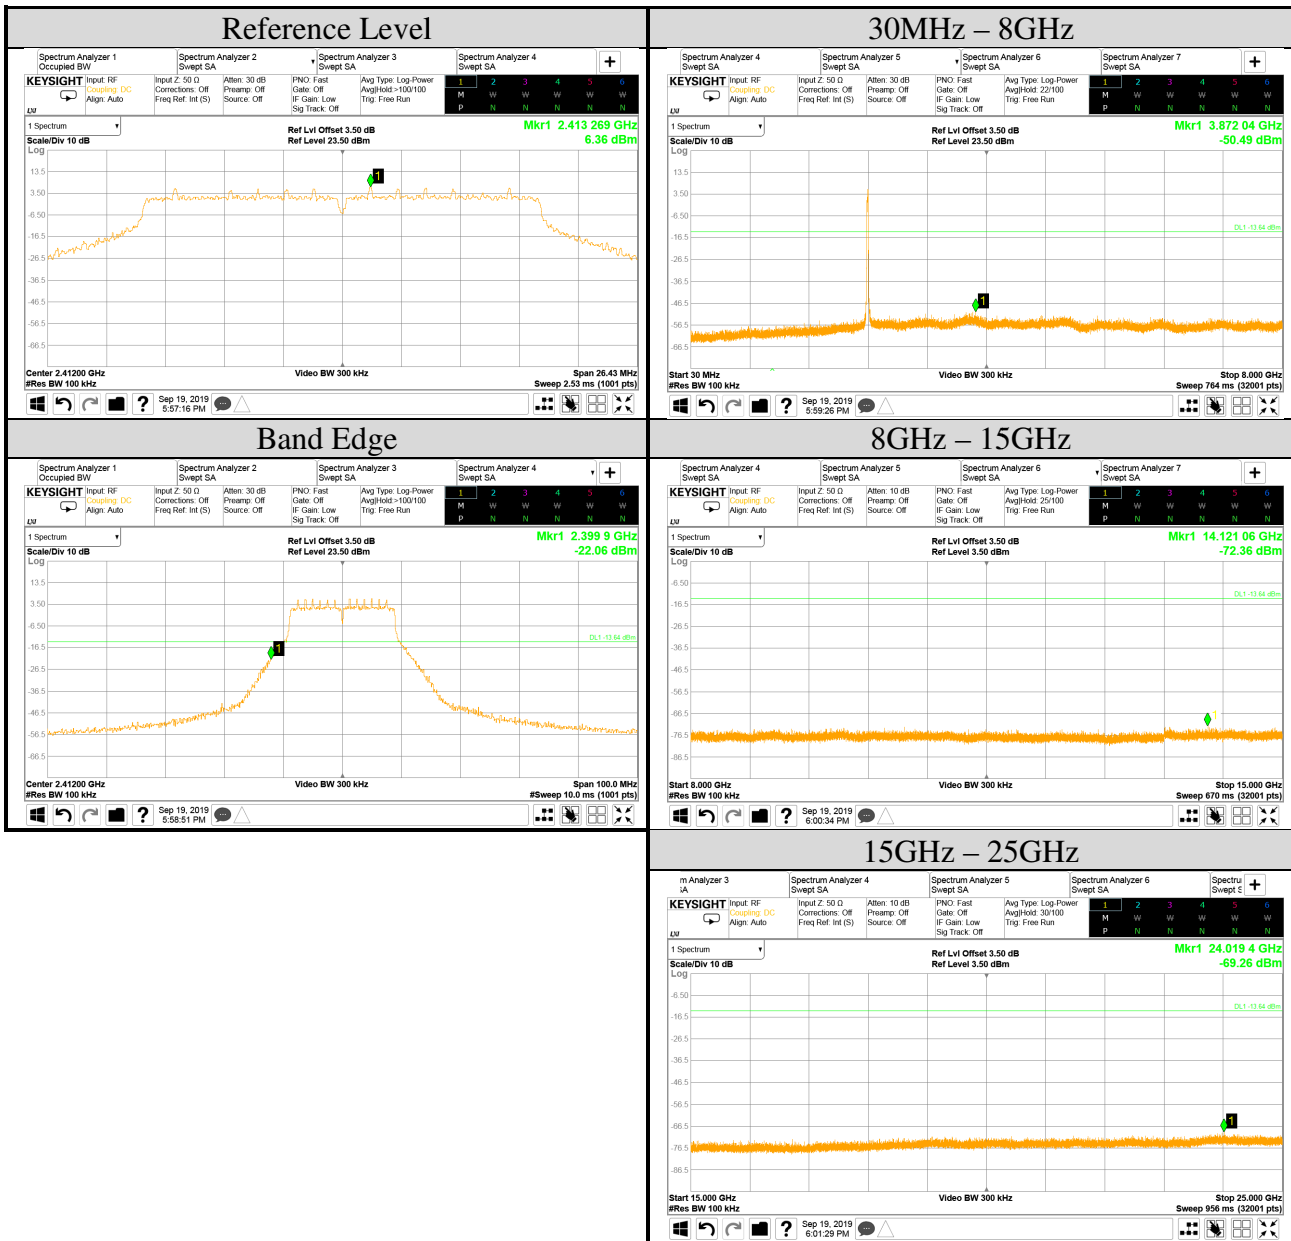


Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Tested By	Martin Chen
Frequency	TX 2442MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			3

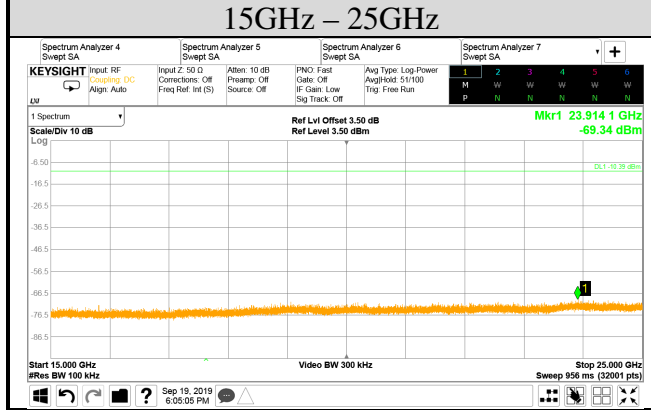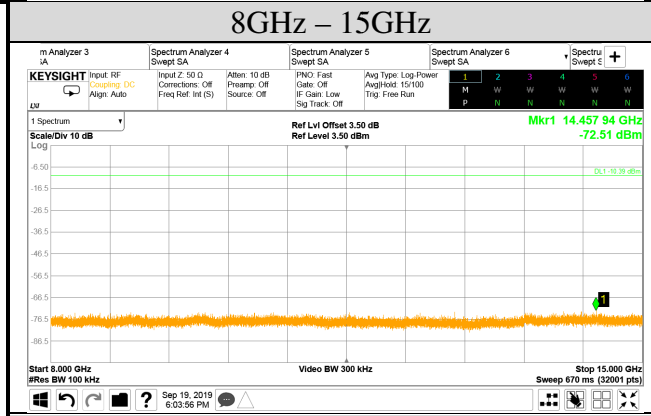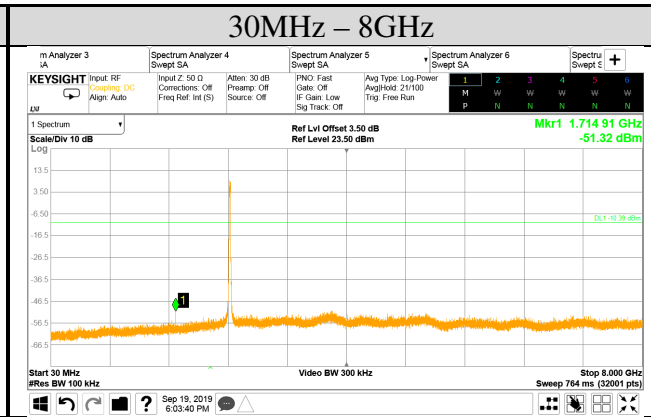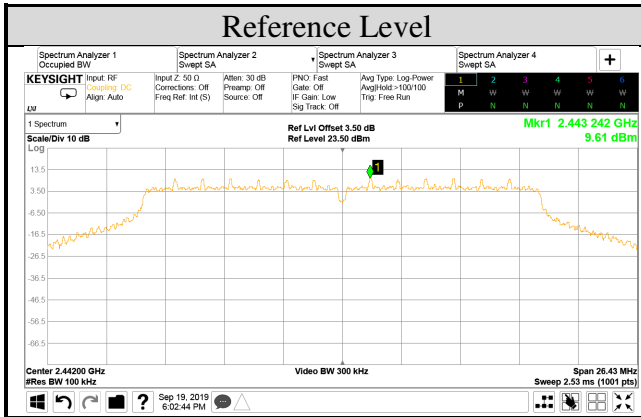


Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Tested By	Martin Chen
Frequency	TX 2462MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			3

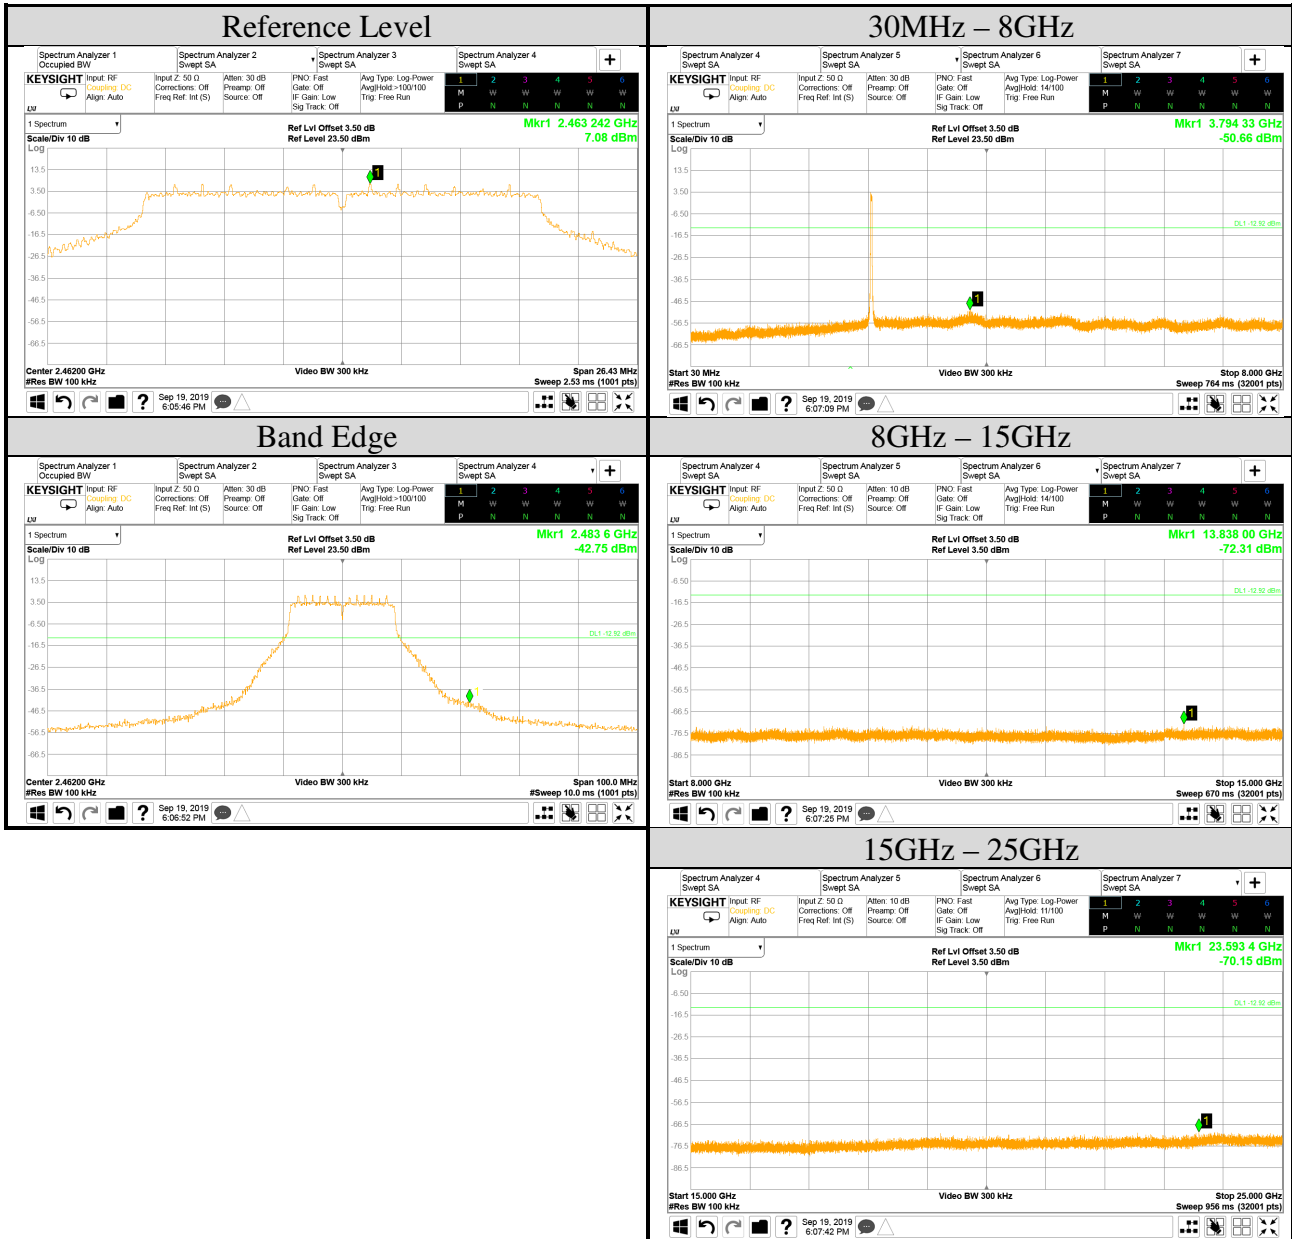

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Tested By	Martin Chen
Frequency	TX 2472MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			3

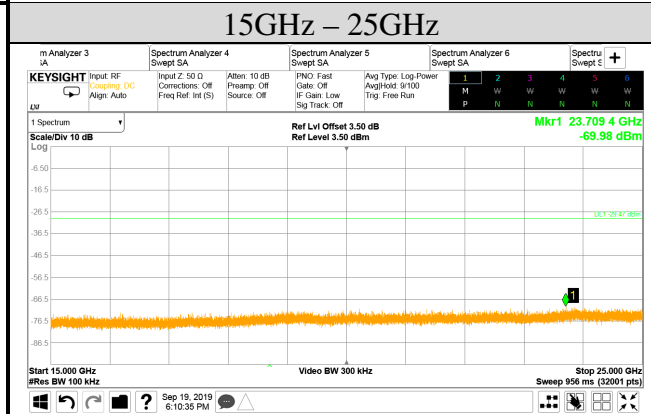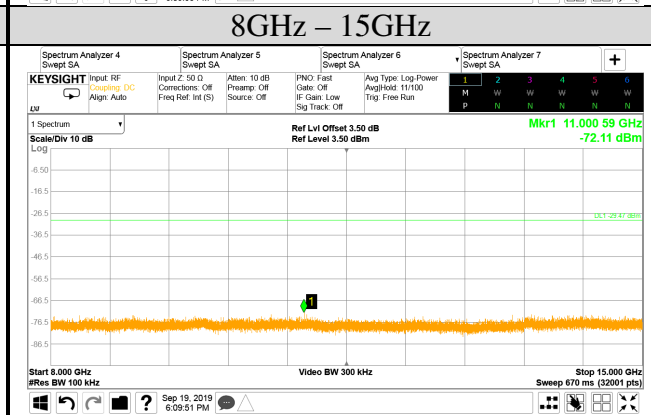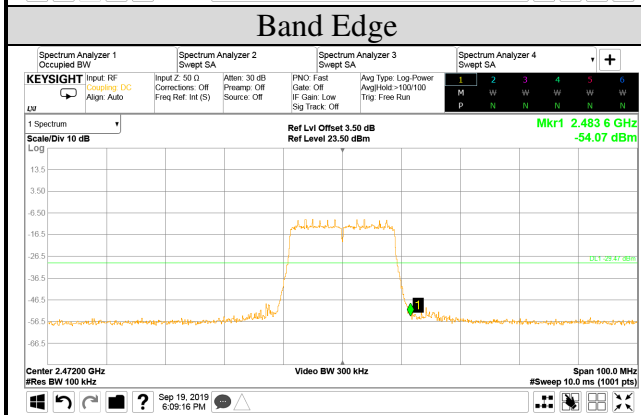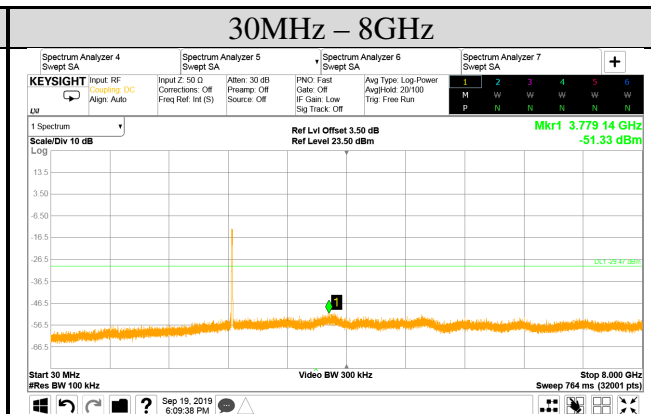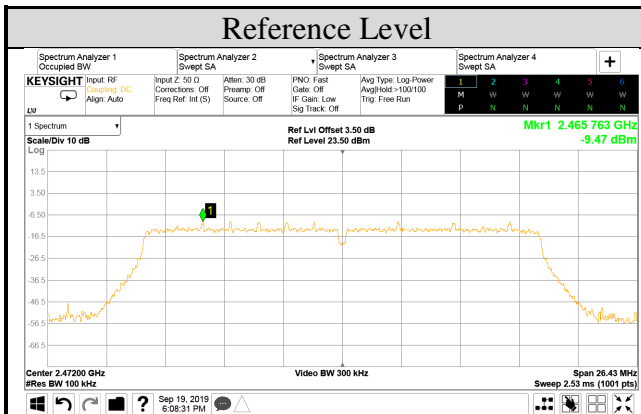





Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Tested By	Martin Chen
Frequency	TX 2422MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			3

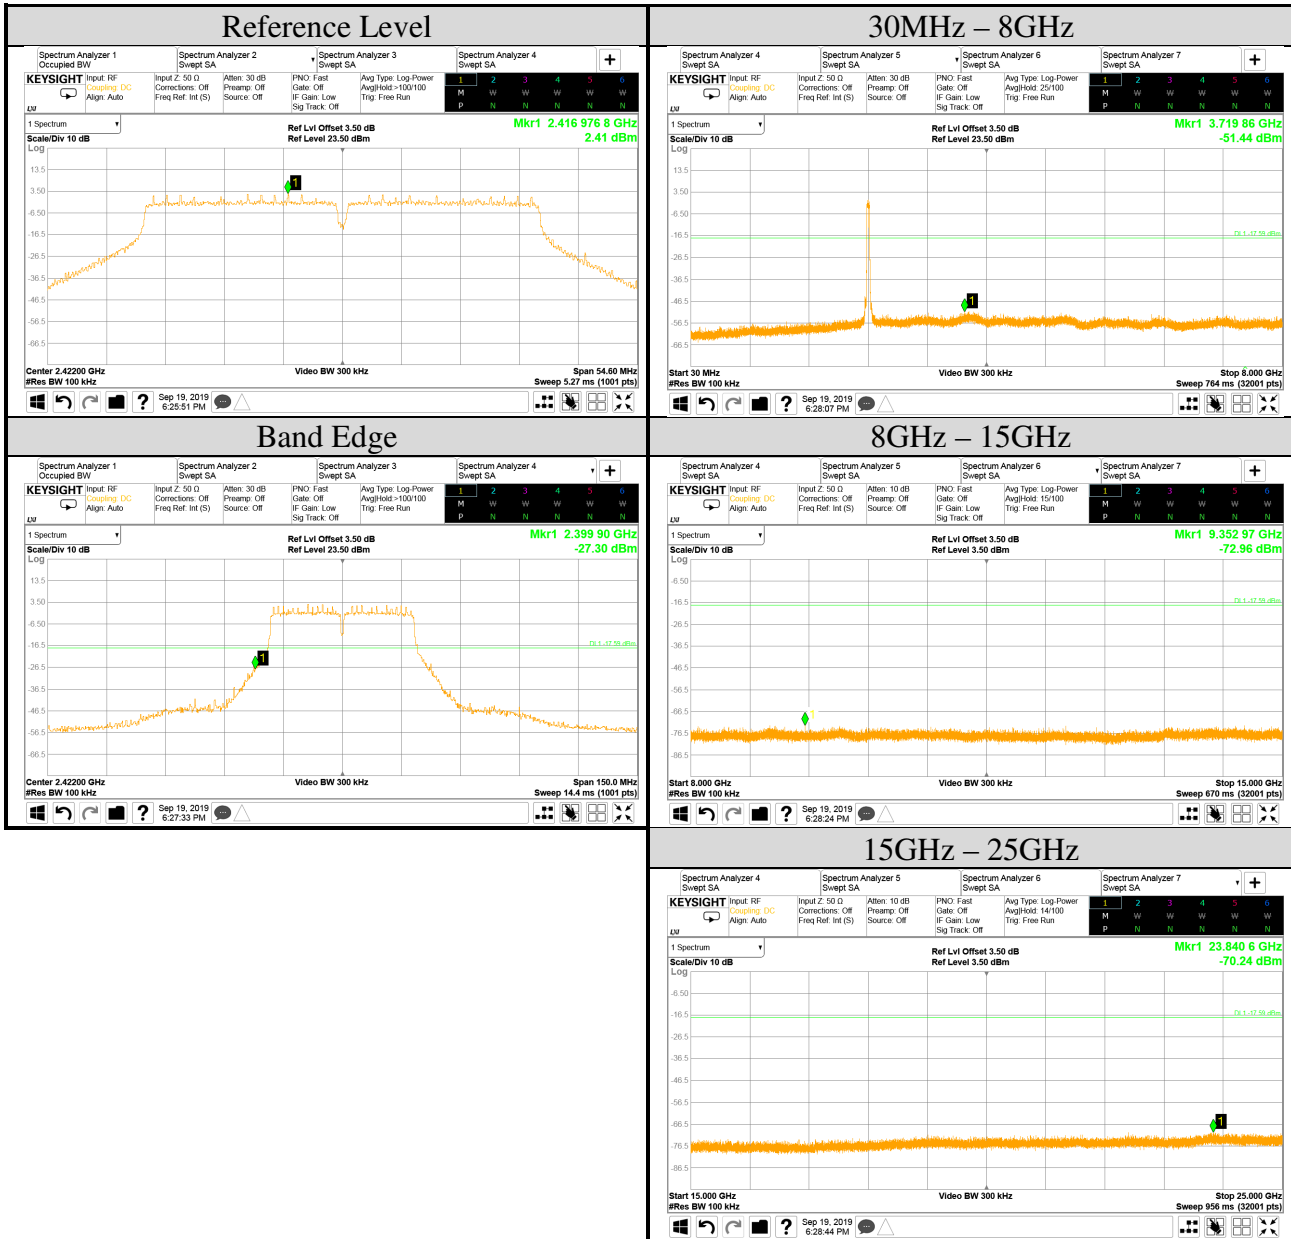


Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Tested By	Martin Chen
Frequency	TX 2442MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			3

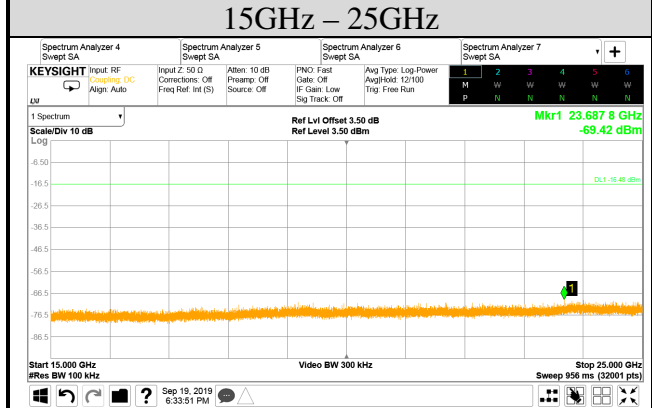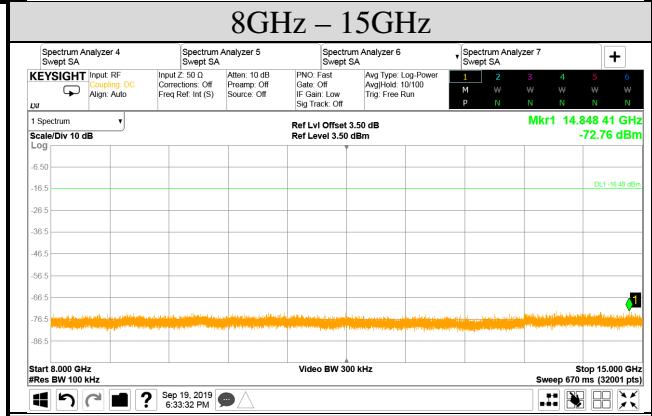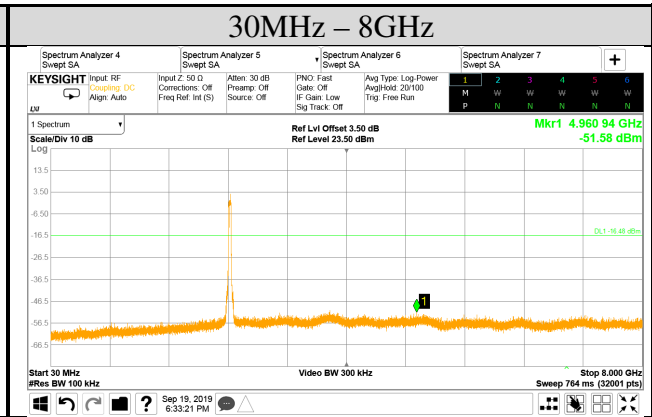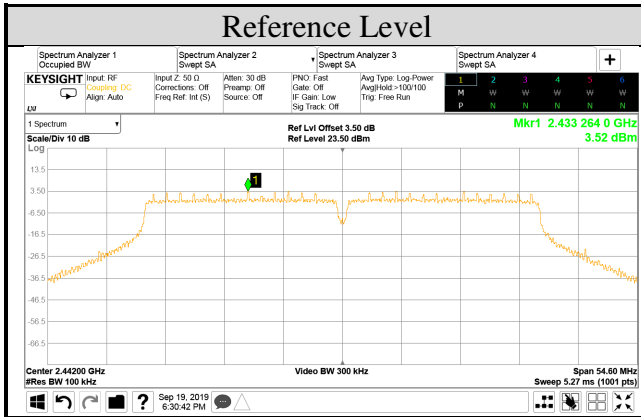

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Tested By	Martin Chen
Frequency	TX 2452MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			3

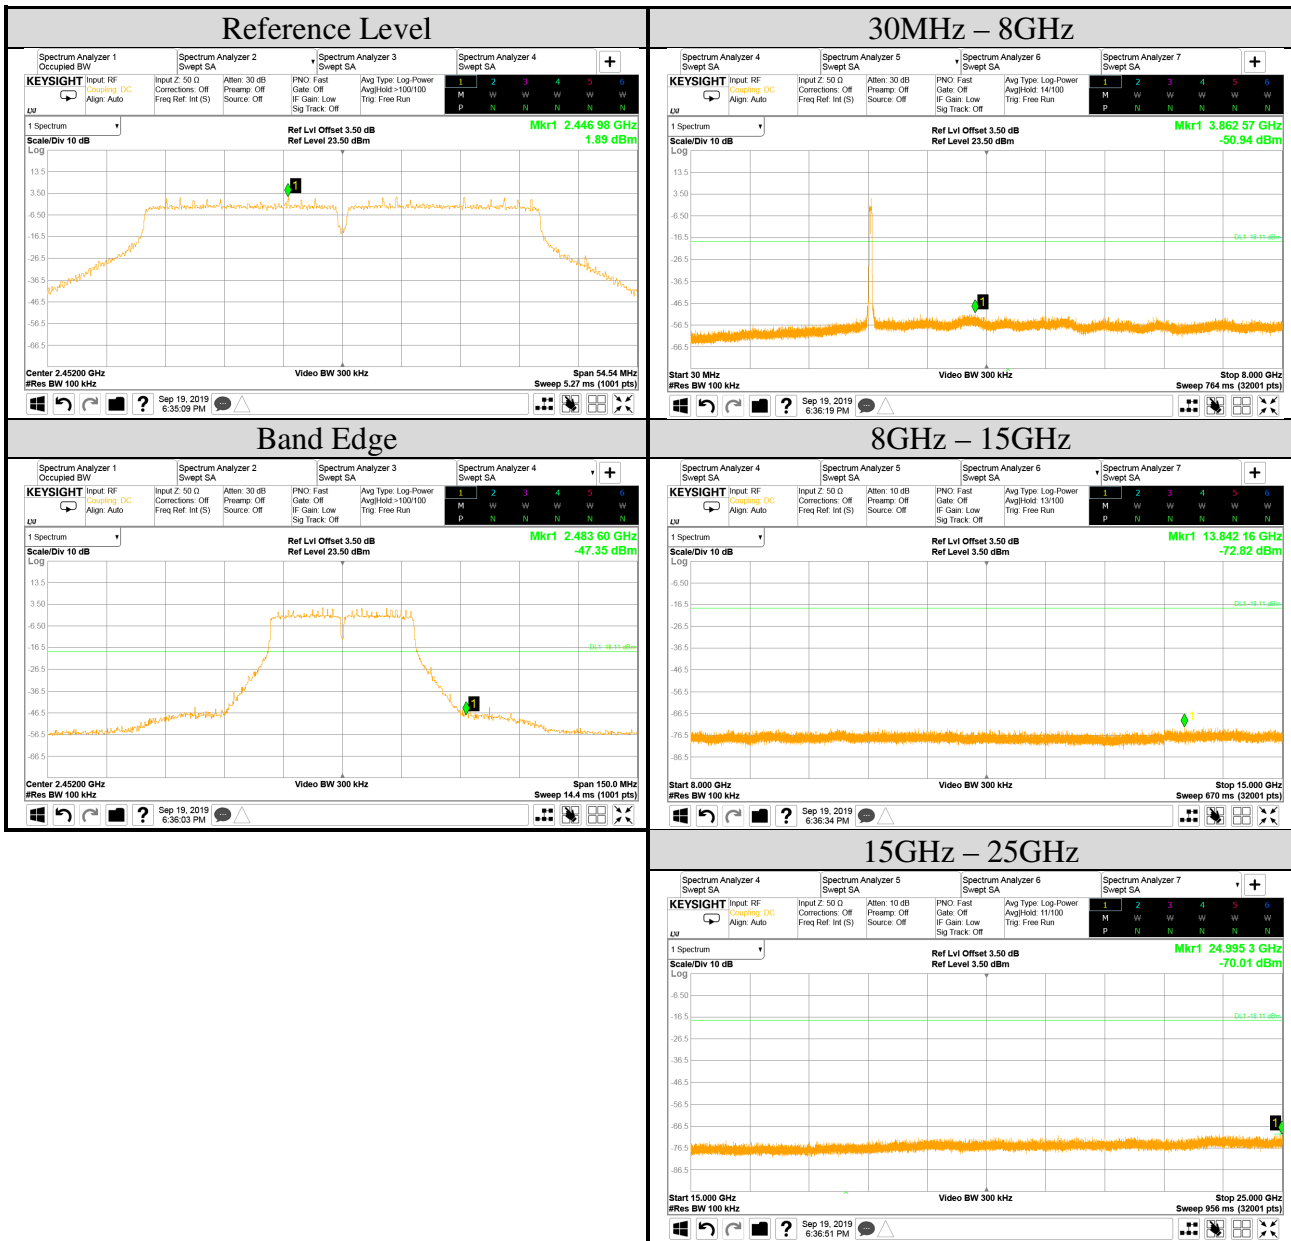

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Tested By	Martin Chen
Frequency	TX 2462MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			3

