

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2021/12/27 ~ 29, 2022/01/28	Temp./Hum	14~16°C/63~70%, 18°C/70%
Cable Loss	0.5dB	Tested By	Kuper Hsu
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.4.1 Peak Output Power

● SPOT CHECK Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11b	2412	22.89	23.34	23.34	0.216
	2442	23.25	23.39	23.39	0.218
	2462	23.13	23.06	23.13	0.206
	2467	22.66	22.21	22.66	0.185
	2472	21.14	20.20	21.14	0.130

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11g	2412	21.52	22.18	22.18	0.165
	2417	23.08	23.33	23.33	0.215
	2442	23.69	23.83	23.83	0.242
	2457	23.01	23.19	23.19	0.208
	2462	21.24	21.47	21.47	0.140
	2467	19.20	18.92	19.20	0.083
	2472	16.73	16.66	16.73	0.047

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11n- HT20	2412	19.86	20.09	22.99	0.199
	2417	21.25	21.36	24.32	0.270
	2422	22.53	22.50	25.53	0.357
	2442	23.63	23.71	26.68	0.466
	2457	22.46	23.48	26.01	0.399
	2462	19.54	19.48	22.52	0.179
	2467	15.67	15.48	18.59	0.072
	2472	13.16	13.33	16.26	0.042

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-16Z90Q, IC: 2703H-16Z90Q. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11n-HT40	2422	20.85	20.41	23.65	0.232
	2442	20.91	21.12	24.03	0.253
	2452	20.72	20.17	23.46	0.222
	2457	17.19	17.34	20.28	0.107
	2462	14.19	14.64	17.43	0.055

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE20	2412	19.72	19.93	22.84	0.192
	2417	21.55	21.86	24.72	0.296
	2422	22.74	22.84	25.80	0.380
	2442	23.65	23.92	26.80	0.479
	2457	22.72	22.92	25.83	0.383
	2462	19.42	19.75	22.60	0.182
	2467	15.81	15.69	18.76	0.075
	2472	13.33	13.74	16.55	0.045

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE40	2422	20.28	20.53	23.42	0.220
	2442	21.71	21.12	24.44	0.278
	2452	20.77	20.49	23.64	0.231
	2457	17.04	17.29	20.18	0.104
	2462	13.51	14.76	17.19	0.052

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
			Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE20	26/0	2412	22.65	22.86	25.77	0.378
	52/37		22.8	22.99	25.91	0.390
	106/53		23.21	23.38	26.31	0.428
	26/8	2472	18.45	18.69	21.58	0.144
	52/40		18.83	19.26	22.06	0.161
	106/54		19.69	19.18	22.45	0.176

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power	
			Chain 0	Chain 1	(dBm)	(W)
802.11ax-HE40	242/61	2422	20.16	20.28	23.23	0.210
	242/62	2467	19.73	19.92	22.84	0.192

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-16Z90Q, IC: 2703H-16Z90Q. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power	
		Chain 0	Chain 1	(dBm)	(W)
BLE (1M)	2402	5.37	---	5.37	0.0034
	2440	5.54	---	5.54	0.0036
	2480	5.67	---	5.67	0.0037
BLE (2M)	2402	5.47	---	5.47	0.0034
	2440	5.65	---	5.65	0.0036
	2480	5.88	---	5.88	0.0037
BLE (PHY Coded S2)	2402	5.45	---	5.45	0.0034
	2440	5.28	---	5.28	0.0036
	2480	5.37	---	5.37	0.0037
BLE (PHY Coded S8)	2402	5.19	---	5.19	0.0034
	2440	5.32	---	5.32	0.0036
	2480	5.33	---	5.33	0.0037

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-16Z90Q, IC: 2703H-16Z90Q. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

● **FCC ID: BEJNT-16Z90Q & IC: 2703H-16Z90Q Power**

Test SKU: SKU #1 (with INPAQ Antenna)

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11b	2412	23.29	23.36	23.36	0.217	3.2	26.56	0.453	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	23.26	23.38	23.38	0.218		26.58	0.455	
	2462	23.34	23.42	23.42	0.220		26.62	0.459	
	2467	22.72	22.54	22.72	0.187		25.92	0.391	
	2472	20.91	20.26	20.91	0.123		24.11	0.258	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11g	2412	21.64	22.05	22.05	0.160	3.2	25.25	0.335	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	23.27	23.51	23.51	0.224		26.71	0.469	
	2442	23.81	23.86	23.86	0.243		27.06	0.508	
	2457	23.17	23.44	23.44	0.221		26.64	0.461	
	2462	21.29	21.59	21.59	0.144		24.79	0.301	
	2467	19.11	19.37	19.37	0.086		22.57	0.181	
	2472	16.94	16.96	16.96	0.050		20.16	0.104	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	20.14	20.19	23.18	0.208	3.2	26.38	0.435	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	21.57	21.67	24.63	0.290		27.83	0.607	
	2422	22.61	22.67	25.65	0.367		28.85	0.767	
	2442	23.72	23.82	26.78	0.476		29.98	0.995	
	2457	22.78	23.09	25.95	0.394		29.15	0.822	
	2462	19.45	19.57	22.52	0.179		25.72	0.373	
	2467	15.84	15.81	18.84	0.077		22.04	0.160	
	2472	13.46	13.55	16.52	0.045		19.72	0.094	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	20.68	20.52	23.61	0.230	3.2	26.81	0.480	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	21.39	21.33	24.37	0.274		27.57	0.571	
	2452	20.54	20.48	23.52	0.225		26.72	0.470	
	2457	17.16	17.25	20.22	0.105		23.42	0.220	
	2462	14.65	14.72	17.70	0.059		20.90	0.123	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	20.43	20.24	23.35	0.216	3.2	26.55	0.452	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	21.84	21.69	24.78	0.301		27.98	0.628	
	2422	23.08	22.82	25.96	0.394		29.16	0.824	
	2442	23.96	24.01	27.00	0.501		30.20	1.047	
	2457	22.64	22.52	25.59	0.362		28.79	0.757	
	2462	19.66	19.81	22.75	0.188		25.95	0.394	
	2467	15.59	15.79	18.70	0.074		21.90	0.155	
	2472	13.55	13.83	16.70	0.047		19.90	0.098	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	20.67	20.74	23.72	0.236	3.2	26.92	0.492	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	21.34	21.46	24.41	0.276		27.61	0.577	
	2452	20.35	20.46	23.42	0.220		26.62	0.459	
	2457	16.92	17.05	20.00	0.100		23.20	0.209	
	2462	13.18	13.33	16.27	0.042		19.47	0.089	

Note: The results have been included cable loss.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	22.79	22.91	25.86	0.385	3.2	29.06	0.805	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		22.85	22.93	25.90	0.389		29.10	0.813	
	106/53		23.01	23.15	26.09	0.406		29.29	0.849	
	26/8	2472	18.68	18.72	21.71	0.148		24.91	0.310	
	52/40		19.21	19.18	22.21	0.166		25.41	0.348	
	106/54		19.25	19.19	22.23	0.167		25.43	0.349	

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	20.61	20.57	23.60	0.229	3.2	26.80	0.479	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	20.08	20.02	23.06	0.202		26.26	0.423	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
BLE (1M)	2402	5.47	---	5.47	0.0035	3.2	8.67	0.0074	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2440	5.60	---	5.60	0.0036		8.80	0.0076	
	2480	5.62	---	5.62	0.0036		8.82	0.0076	
BLE (2M)	2402	5.52	---	5.52	0.0036		8.72	0.0074	
	2440	5.56	---	5.56	0.0036		8.76	0.0075	
	2480	5.64	---	5.64	0.0037		8.84	0.0077	
BLE (PHY Coded S2)	2402	5.38	---	5.38	0.0035		8.58	0.0072	
	2440	5.52	---	5.52	0.0036		8.72	0.0074	
	2480	5.60	---	5.60	0.0036		8.80	0.0076	
BLE (PHY Coded S8)	2402	5.39	---	5.39	0.0035		8.59	0.0072	
	2440	5.53	---	5.53	0.0036		8.73	0.0075	
	2480	5.60	---	5.60	0.0036		8.80	0.0076	

Note: The results have been included cable loss.

Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11b	2412	23.29	23.36	23.36	0.217	6.3	29.66	0.925	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	23.26	23.38	23.38	0.218		29.68	0.929	
	2462	23.34	23.42	23.42	0.220		29.72	0.938	
	2467	22.72	22.54	22.72	0.187		29.02	0.798	
	2472	20.91	20.26	20.91	0.123		27.21	0.526	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11g	2412	21.64	22.05	22.05	0.160	6.3	28.35	0.684	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	23.27	23.51	23.51	0.224		29.81	0.957	
	2442	23.81	23.86	23.86	0.243		30.16	1.038	
	2457	23.17	23.44	23.44	0.221		29.74	0.942	
	2462	21.29	21.59	21.59	0.144		27.89	0.615	
	2467	19.11	19.37	19.37	0.086		25.67	0.369	
	2472	16.94	16.96	16.96	0.050		23.26	0.212	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	20.14	20.19	23.18	0.208	6.3	29.48	0.887	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	21.57	21.67	24.63	0.290		30.93	1.239	
	2422	22.61	22.67	25.65	0.367		31.95	1.567	
	2442	23.72	23.82	26.78	0.476		33.08	2.032	
	2457	22.78	23.09	25.95	0.394		32.25	1.679	
	2462	19.45	19.57	22.52	0.179		28.82	0.762	
	2467	15.84	15.81	18.84	0.077		25.14	0.327	
	2472	13.46	13.55	16.52	0.045		22.82	0.191	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	20.68	20.52	23.61	0.230	6.3	29.91	0.979	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	21.39	21.33	24.37	0.274		30.67	1.167	
	2452	20.54	20.48	23.52	0.225		29.82	0.959	
	2457	17.16	17.25	20.22	0.105		26.52	0.449	
	2462	14.65	14.72	17.70	0.059		24.00	0.251	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	20.43	20.24	23.35	0.216	6.3	29.65	0.923	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	21.84	21.69	24.78	0.301		31.08	1.282	
	2422	23.08	22.82	25.96	0.394		32.26	1.683	
	2442	23.96	24.01	27.00	0.501		33.30	2.138	
	2457	22.64	22.52	25.59	0.362		31.89	1.545	
	2462	19.66	19.81	22.75	0.188		29.05	0.804	
	2467	15.59	15.79	18.70	0.074		25.00	0.316	
	2472	13.55	13.83	16.70	0.047		23.00	0.200	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	20.67	20.74	23.72	0.236	6.3	30.02	1.005	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	21.34	21.46	24.41	0.276		30.71	1.178	
	2452	20.35	20.46	23.42	0.220		29.72	0.938	
	2457	16.92	17.05	20.00	0.100		26.30	0.427	
	2462	13.18	13.33	16.27	0.042		22.57	0.181	

Note: The results have been included cable loss.

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	22.79	22.91	25.86	0.385	6.3	32.16	1.644	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		22.85	22.93	25.90	0.389		32.20	1.660	
	106/53		23.01	23.15	26.09	0.406		32.39	1.734	
	26/8	2472	18.68	18.72	21.71	0.148		28.01	0.632	
	52/40		19.21	19.18	22.21	0.166		28.51	0.710	
	106/54		19.25	19.19	22.23	0.167		28.53	0.713	

Mode	RU Configuration	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	20.61	20.57	23.60	0.229	6.3	29.90	0.977	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	20.08	20.02	23.06	0.202		29.36	0.863	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
BLE (1M)	2402	5.47	---	5.47	0.0035	6.3	11.77	0.0150	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2440	5.60	---	5.60	0.0036		11.90	0.0155	
	2480	5.62	---	5.62	0.0036		11.92	0.0156	
BLE (2M)	2402	5.52	---	5.52	0.0036		11.82	0.0152	
	2440	5.56	---	5.56	0.0036		11.86	0.0153	
	2480	5.64	---	5.64	0.0037		11.94	0.0156	
BLE (PHY Coded S2)	2402	5.38	---	5.38	0.0035		11.68	0.0147	
	2440	5.52	---	5.52	0.0036		11.82	0.0152	
	2480	5.60	---	5.60	0.0036		11.90	0.0155	
BLE (PHY Coded S8)	2402	5.39	---	5.39	0.0035		11.69	0.0148	
	2440	5.53	---	5.53	0.0036		11.83	0.0152	
	2480	5.60	---	5.60	0.0036		11.90	0.0155	

Note: The results have been included cable loss.

A.4.2 Average Output Power (Reporting only)

● SPOT CHECK Power

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11b	2412	19.69	19.88	0	19.88	0.097
	2442	19.81	19.91		19.91	0.098
	2462	19.77	19.80		19.80	0.095
	2467	18.99	18.85		18.99	0.079
	2472	16.51	15.65		16.51	0.045

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11g	2412	16.50	17.06	0	17.06	0.051
	2417	18.37	18.71		18.71	0.074
	2442	19.18	19.34		19.34	0.086
	2457	18.21	18.39		18.39	0.069
	2462	16.17	16.52		16.52	0.045
	2467	13.93	14.17		14.17	0.026
	2472	11.07	11.09		11.09	0.013

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11n-HT20	2412	14.90	15.16	0	18.04	0.064
	2417	16.41	16.56		19.50	0.089
	2422	17.61	17.70		20.67	0.117
	2442	19.17	19.35		22.27	0.169
	2457	17.66	17.89		20.79	0.120
	2462	14.30	14.50		17.41	0.055
	2467	10.35	10.46		13.42	0.022
	2472	7.35	7.44		10.41	0.011

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11n-HT40	2422	13.72	14.21	0	16.98	0.050
	2442	14.53	14.93		17.74	0.059
	2452	13.47	13.99		16.75	0.047
	2457	10.82	11.12		13.98	0.025
	2467	6.89	6.45		9.69	0.009

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-16Z90Q, IC: 2703H-16Z90Q. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE20	2412	16.79	16.02	0	19.43	0.088
	2417	17.53	17.69		20.62	0.115
	2422	17.75	17.82		20.80	0.120
	2442	19.29	19.45		22.38	0.173
	2457	17.73	18.04		20.90	0.123
	2462	14.39	14.67		17.54	0.057
	2467	10.36	10.51		13.45	0.022
	2472	7.23	7.41		10.33	0.011

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
		Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE40	2422	13.67	13.91	0	16.80	0.048
	2442	14.26	14.83		17.56	0.057
	2452	13.16	13.83		16.52	0.045
	2457	10.41	10.89		13.67	0.023
	2467	6.57	6.89		9.74	0.009

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
			Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE20	26/0	2412	17.76	17.85	0	20.82	0.121
	52/37		17.84	17.99		20.93	0.124
	106/53		18.15	18.22		21.20	0.132
	26/8	2472	5.62	5.27		8.46	0.007
	52/40		5.72	6.16		8.96	0.008
	106/54		5.92	6.45		9.20	0.008

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power	
			Chain 0	Chain 1		(dBm)	(W)
802.11ax-HE40	242/61	2422	15.66	15.78	0	18.73	0.075
	242/62	2467	7.96	7.81		10.90	0.012

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-16Z90Q, IC: 2703H-16Z90Q. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

● **FCC ID: BEJNT-16Z90Q & IC: 2703H-16Z90Q Power**

Test SKU: SKU #1 (with INPAQ Antenna)

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11b	2412	19.91	19.94	0	19.94	0.099	3.2	23.14	0.206	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	19.71	19.88		19.88	0.097		23.08	0.203	
	2462	19.78	19.92		19.92	0.098		23.12	0.205	
	2467	18.94	18.83		18.94	0.078		22.14	0.164	
	2472	16.75	15.81		16.75	0.047		19.95	0.099	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11g	2412	16.80	17.17	0.143	17.17	0.052	3.2	20.37	0.109	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	18.53	18.79		18.79	0.076		21.99	0.158	
	2442	19.29	19.46		19.46	0.088		22.66	0.185	
	2457	18.25	18.58		18.58	0.072		21.78	0.151	
	2462	16.45	16.69		16.69	0.047		19.89	0.097	
	2467	14.39	14.43		14.43	0.028		17.63	0.058	
	2472	11.43	11.36		11.43	0.014		14.63	0.029	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	15.17	15.06	0	18.13	0.065	3.2	21.33	0.136	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	16.52	16.58		19.56	0.090		22.76	0.189	
	2422	17.64	17.77		20.72	0.118		23.92	0.247	
	2442	19.22	19.31		22.28	0.169		25.48	0.353	
	2457	17.83	18.04		20.95	0.124		24.15	0.260	
	2462	14.60	14.56		17.59	0.057		20.79	0.120	
	2467	10.62	10.58		13.61	0.023		16.81	0.048	
	2472	7.51	7.73		10.63	0.012		13.83	0.024	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	14.16	14.21	0	17.20	0.052	3.2	20.40	0.110	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	14.89	14.97		17.94	0.062		21.14	0.130	
	2452	13.79	13.81		16.81	0.048		20.01	0.100	
	2457	10.64	10.77		13.72	0.024		16.92	0.049	
	2462	6.84	6.88		9.87	0.010		13.07	0.020	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	16.71	16.55	0	19.64	0.092	3.2	22.84	0.192	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	17.91	17.80		20.87	0.122		24.07	0.255	
	2422	18.13	18.24		21.20	0.132		24.40	0.275	
	2442	19.74	19.73		22.75	0.188		25.95	0.394	
	2457	18.01	18.21		21.12	0.129		24.32	0.270	
	2462	14.56	14.68		17.63	0.058		20.83	0.121	
	2467	10.60	10.73		13.68	0.023		16.88	0.049	
	2472	7.53	7.77		10.66	0.012		13.86	0.024	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	14.01	14.05	0	17.04	0.051	3.2	20.24	0.106	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	14.68	14.67		17.69	0.059		20.89	0.123	
	2452	13.61	13.67		16.65	0.046		19.85	0.097	
	2457	10.46	10.42		13.45	0.022		16.65	0.046	
	2462	6.92	6.84		9.89	0.010		13.09	0.020	

Note: The results have been included cable loss.

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	18.04	18.10	0	21.08	0.128	3.2	24.28	0.268	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		18.32	18.37		21.36	0.137		24.56	0.286	
	106/53		18.55	18.61		21.59	0.144		24.79	0.301	
	26/8	2472	5.62	5.47		8.56	0.007		11.76	0.015	
	52/40		6.08	6.21		9.16	0.008		12.36	0.017	
	106/54		6.08	6.37		9.24	0.008		12.44	0.018	

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	15.59	15.51	0	18.56	0.072	3.2	21.76	0.150	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2462	8.15	7.96		11.07	0.013		14.27	0.027	

Note: The results have been included cable loss.

Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11b	2412	19.91	19.94	0	19.94	0.099	6.3	26.24	0.421	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	19.71	19.88		19.88	0.097		26.18	0.415	
	2462	19.78	19.92		19.92	0.098		26.22	0.419	
	2467	18.94	18.83		18.94	0.078		25.24	0.334	
	2472	16.75	15.81		16.75	0.047		23.05	0.202	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11g	2412	16.80	17.17	0.143	17.17	0.052	6.3	23.47	0.222	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	18.53	18.79		18.79	0.076		25.09	0.323	
	2442	19.29	19.46		19.46	0.088		25.76	0.377	
	2457	18.25	18.58		18.58	0.072		24.88	0.308	
	2462	16.45	16.69		16.69	0.047		22.99	0.199	
	2467	14.39	14.43		14.43	0.028		20.73	0.118	
	2472	11.43	11.36		11.43	0.014		17.73	0.059	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	15.17	15.06	0	18.13	0.065	6.3	24.43	0.277	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	16.52	16.58		19.56	0.090		25.86	0.385	
	2422	17.64	17.77		20.72	0.118		27.02	0.504	
	2442	19.22	19.31		22.28	0.169		28.58	0.721	
	2457	17.83	18.04		20.95	0.124		27.25	0.531	
	2462	14.60	14.56		17.59	0.057		23.89	0.245	
	2467	10.62	10.58		13.61	0.023		19.91	0.098	
	2472	7.51	7.73		10.63	0.012		16.93	0.049	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	14.16	14.21	0	17.20	0.052	6.3	23.50	0.224	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	14.89	14.97		17.94	0.062		24.24	0.265	
	2452	13.79	13.81		16.81	0.048		23.11	0.205	
	2457	10.64	10.77		13.72	0.024		20.02	0.100	
	2462	6.84	6.88		9.87	0.010		16.17	0.041	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	16.71	16.55	0	19.64	0.092	6.3	25.94	0.393	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	17.91	17.80		20.87	0.122		27.17	0.521	
	2422	18.13	18.24		21.20	0.132		27.50	0.562	
	2442	19.74	19.73		22.75	0.188		29.05	0.804	
	2457	18.01	18.21		21.12	0.129		27.42	0.552	
	2462	14.56	14.68		17.63	0.058		23.93	0.247	
	2467	10.60	10.73		13.68	0.023		19.98	0.100	
	2472	7.53	7.77		10.66	0.012		16.96	0.050	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	14.01	14.05	0	17.04	0.051	6.3	23.34	0.216	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2442	14.68	14.67		17.69	0.059		23.99	0.251	
	2452	13.61	13.67		16.65	0.046		22.95	0.197	
	2457	10.46	10.42		13.45	0.022		19.75	0.094	
	2462	6.92	6.84		9.89	0.010		16.19	0.042	

Note: The results have been included cable loss.


Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	18.04	18.10	0	21.08	0.128	6.3	27.38	0.547	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		18.32	18.37		21.36	0.137		27.66	0.583	
	106/53		18.55	18.61		21.59	0.144		27.89	0.615	
	26/8	2472	5.62	5.47		8.56	0.007		14.86	0.031	
	52/40		6.08	6.21		9.16	0.008		15.46	0.035	
	106/54		6.08	6.37		9.24	0.008		15.54	0.036	


Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	15.59	15.51	0	18.56	0.072	6.3	24.86	0.306	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2462	8.15	7.96		11.07	0.013		17.37	0.055	

Note: The results have been included cable loss.

A.4.3 Measurement Plots


● FCC ID: BEJNT-16Z90Q & IC: 2703H-16Z90Q Output Power

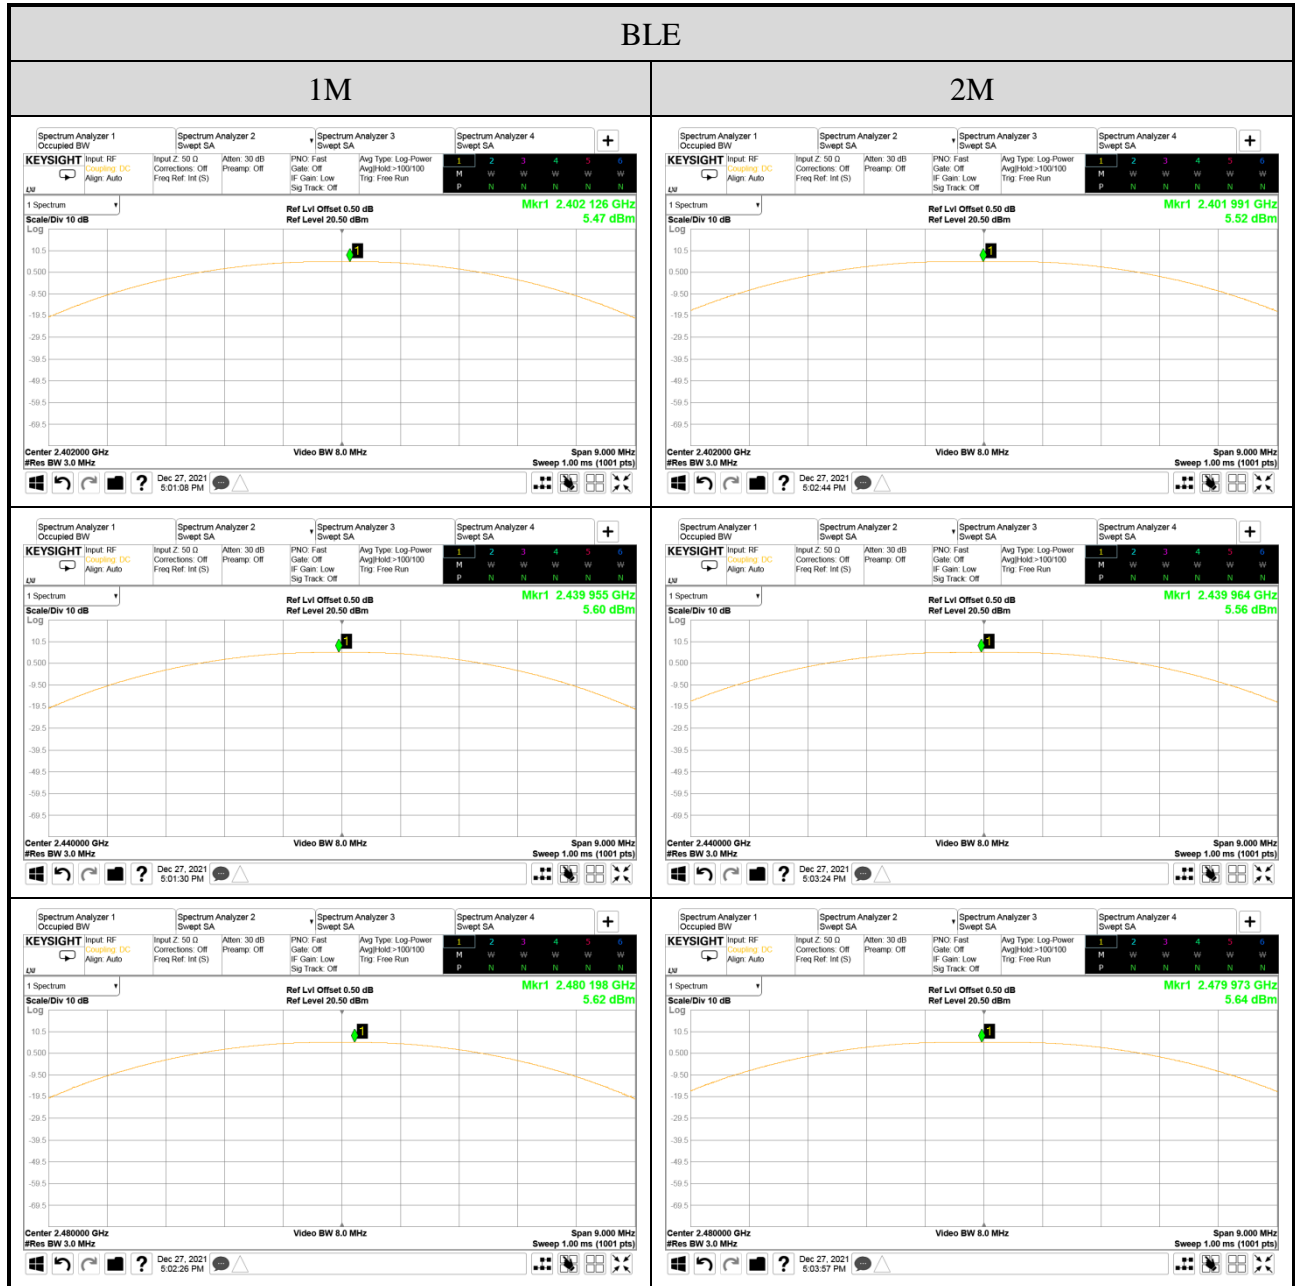

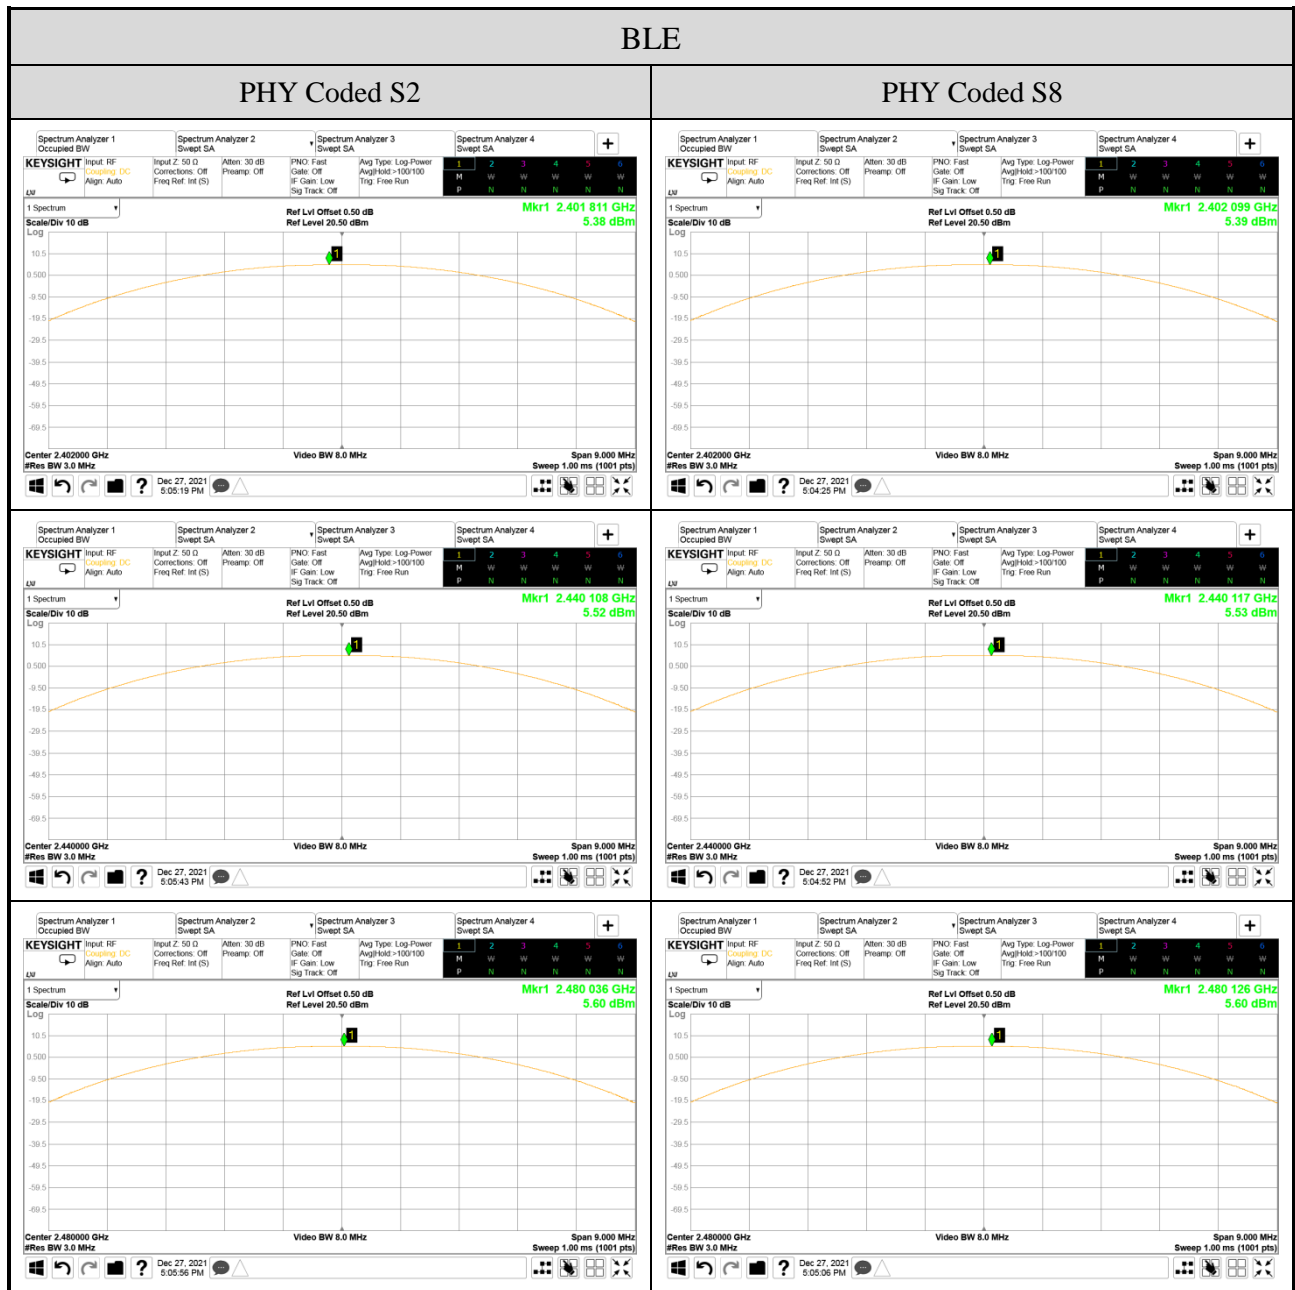

A.5 EMISSION LIMITATIONS





Test Date	2021/12/27	Temp./Hum.	14°C/70%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Kuper Hsu
Frequency	TX 2412MHz		
Simultaneous Factor10 log(n) (Note: “n” is antenna number)			0

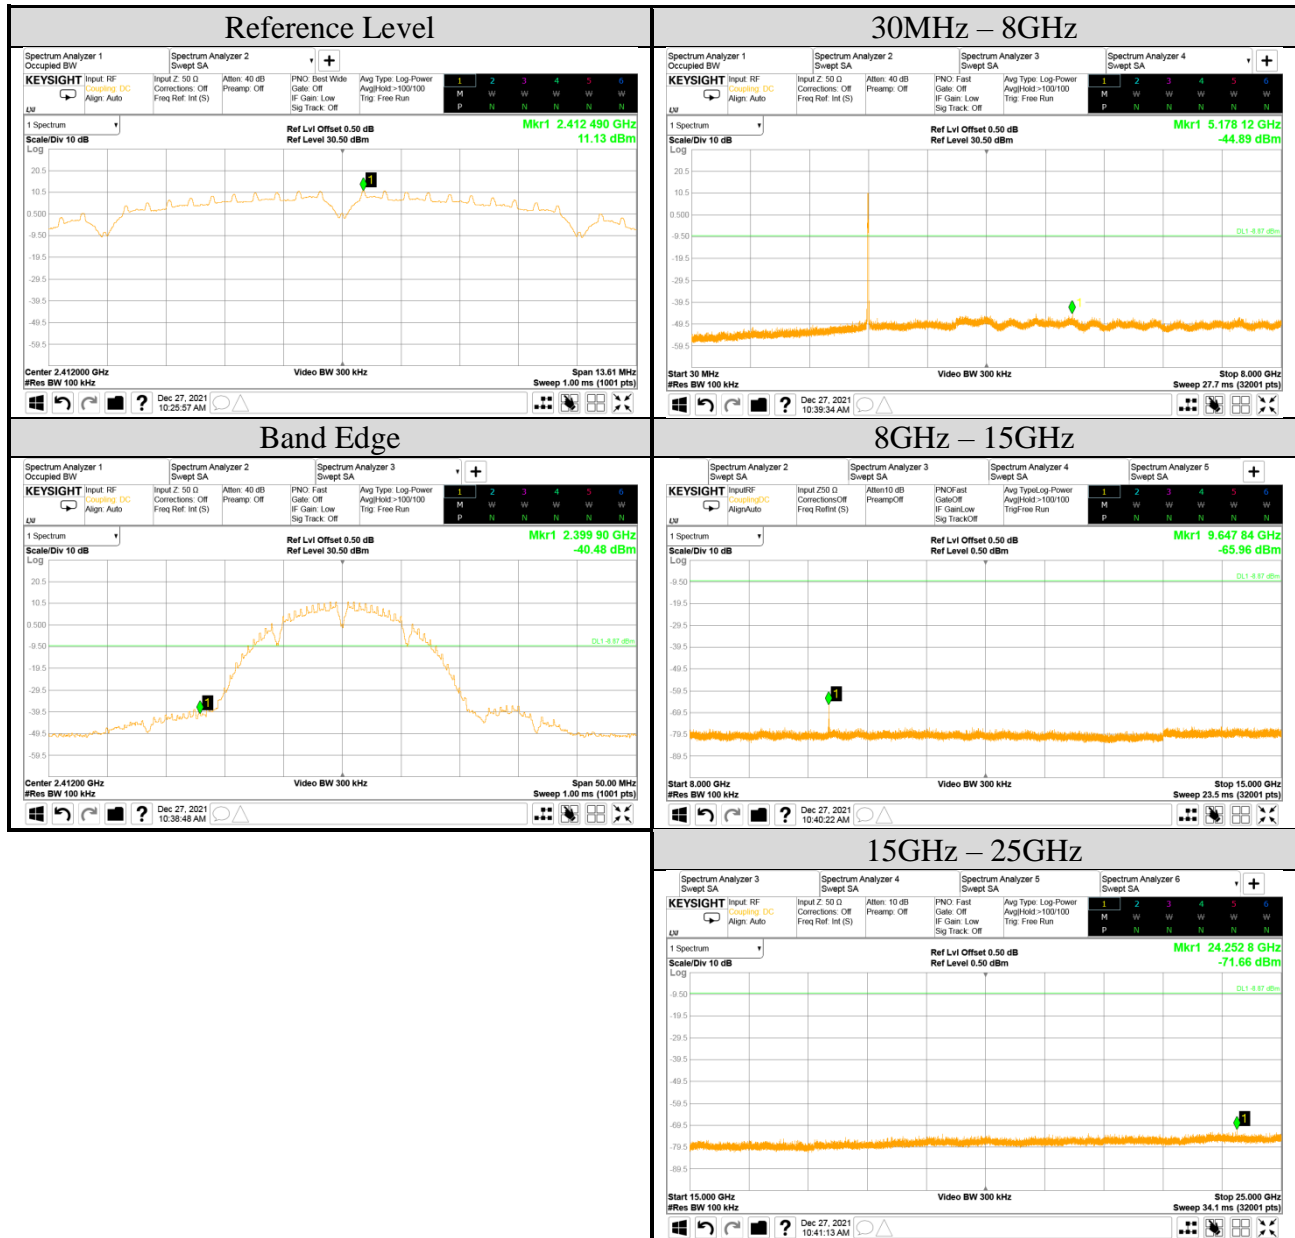

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2021/12/27	Temp./Hum.	14°C/70%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Kuper Hsu
Frequency	TX 2442MHz		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			0

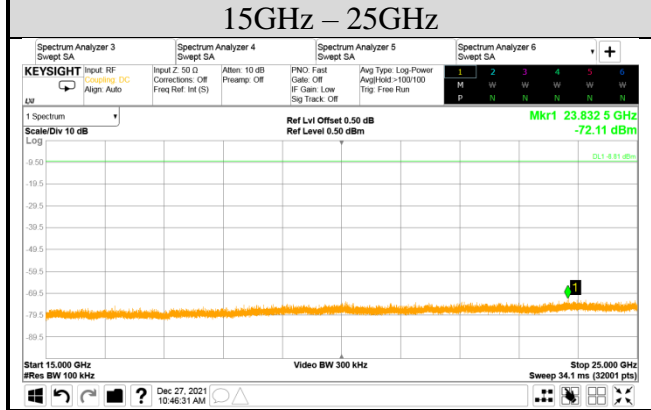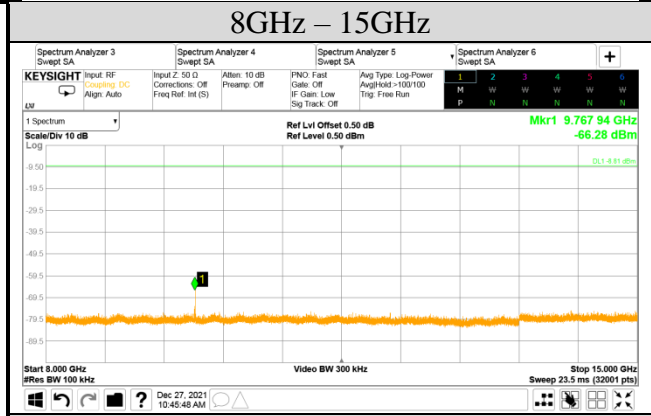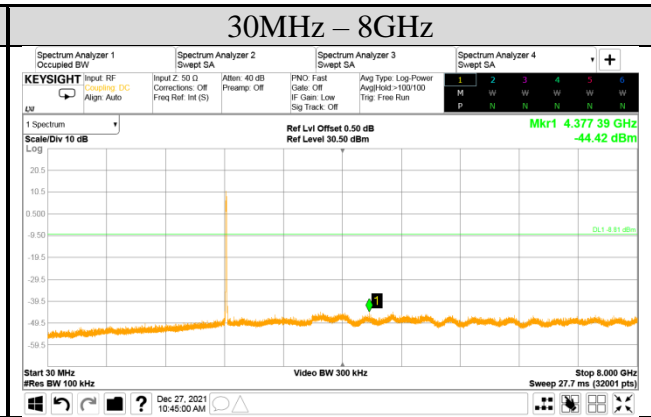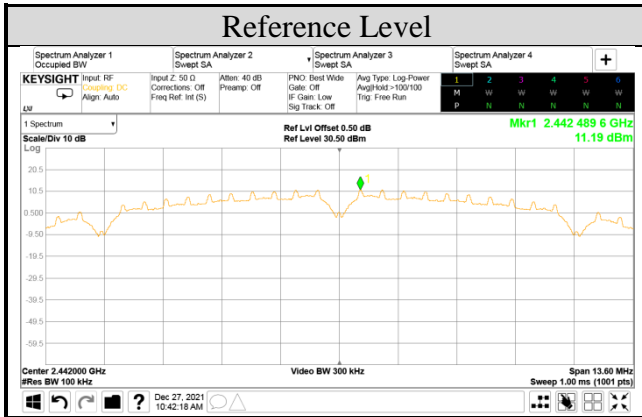

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303


Test Date	2021/12/27	Temp./Hum.	14°C/70%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Kuper Hsu
Frequency	TX 2462MHz		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			0

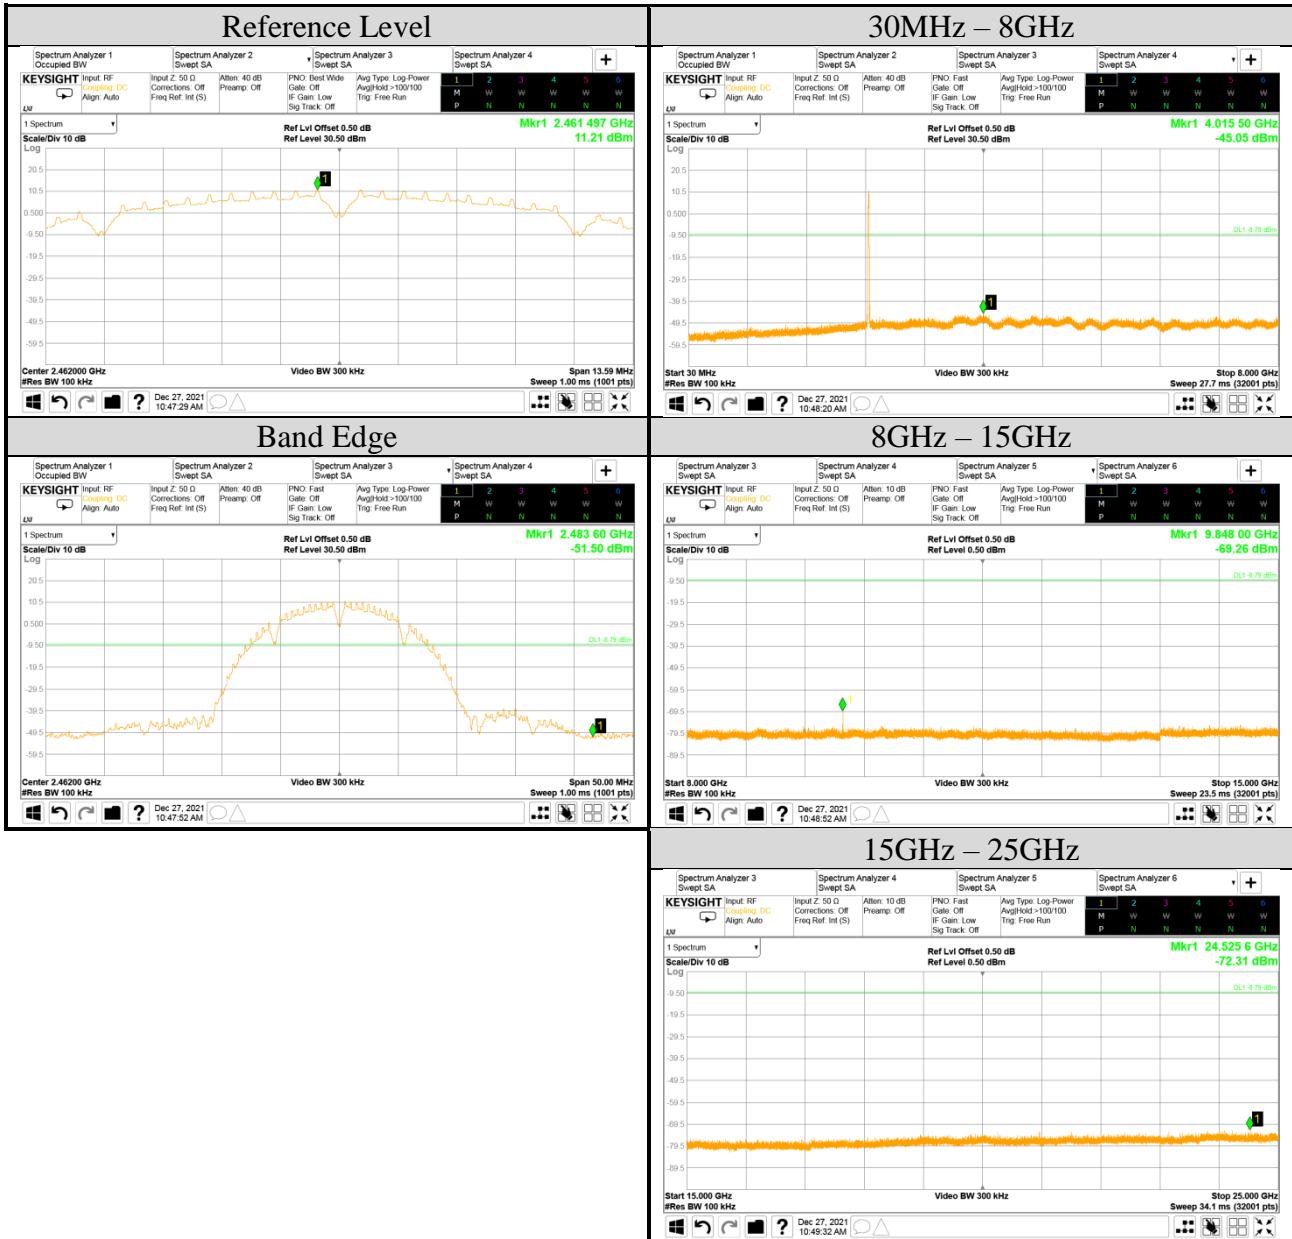

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2021/12/27	Temp./Hum.	14°C/70%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Kuper Hsu
Frequency	TX 2472MHz		
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

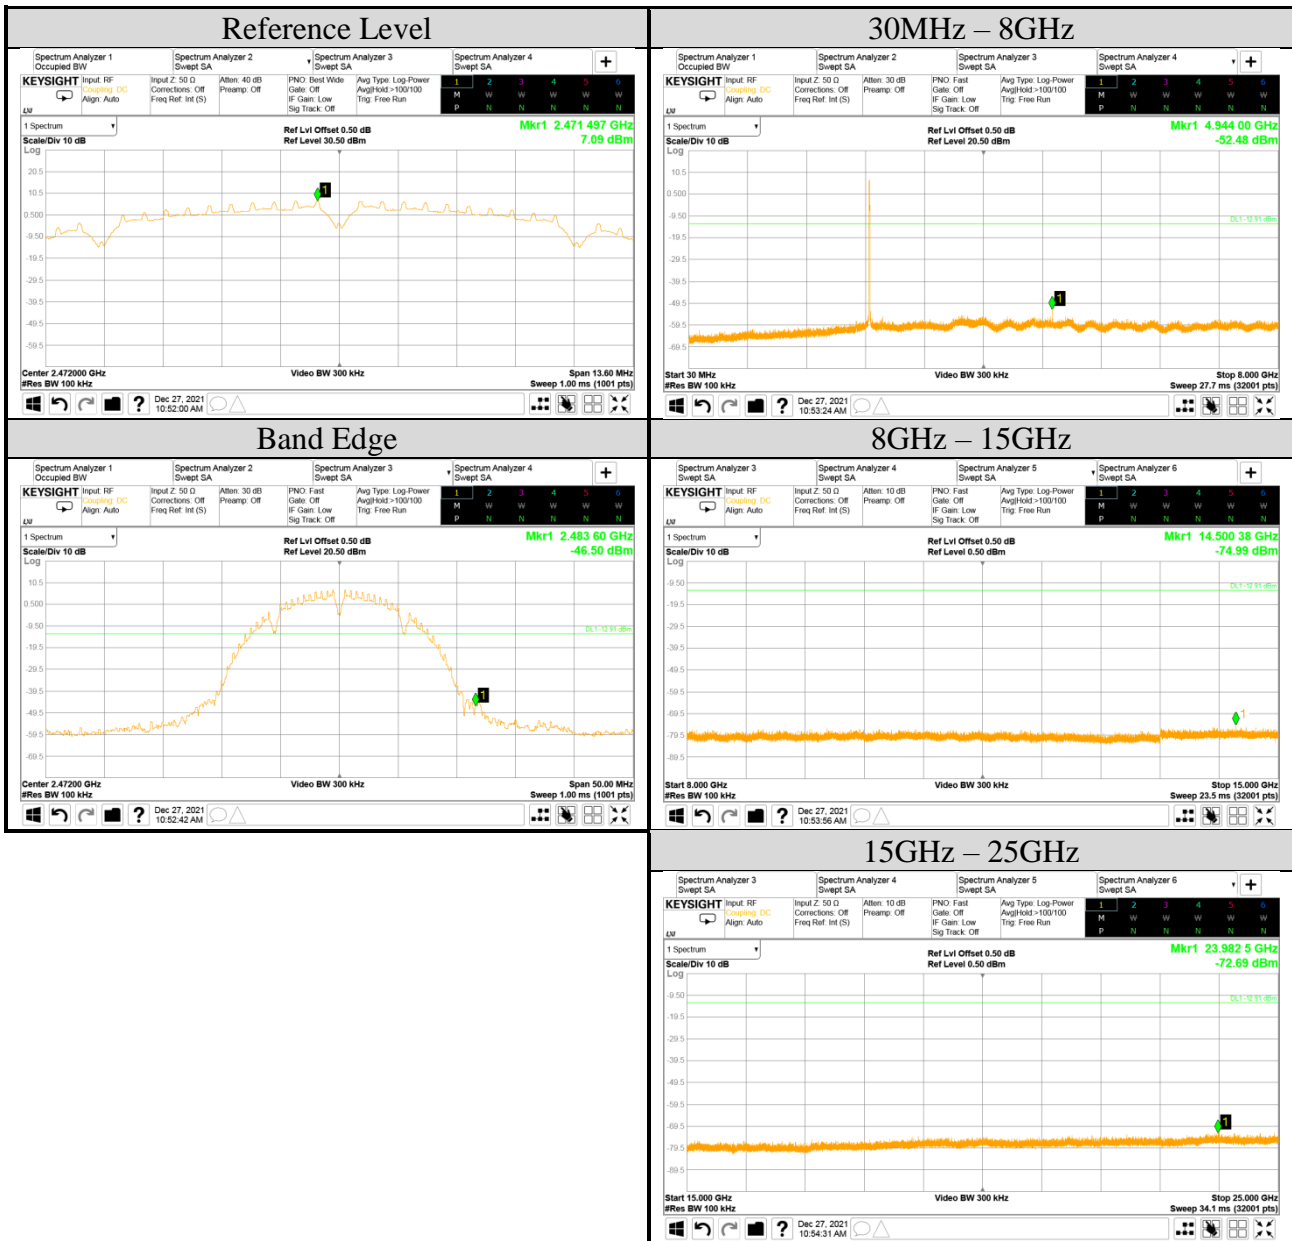

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303





Test Date	2021/12/27	Temp./Hum.	14°C/70%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Kuper Hsu
Frequency	TX 2412MHz		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			0

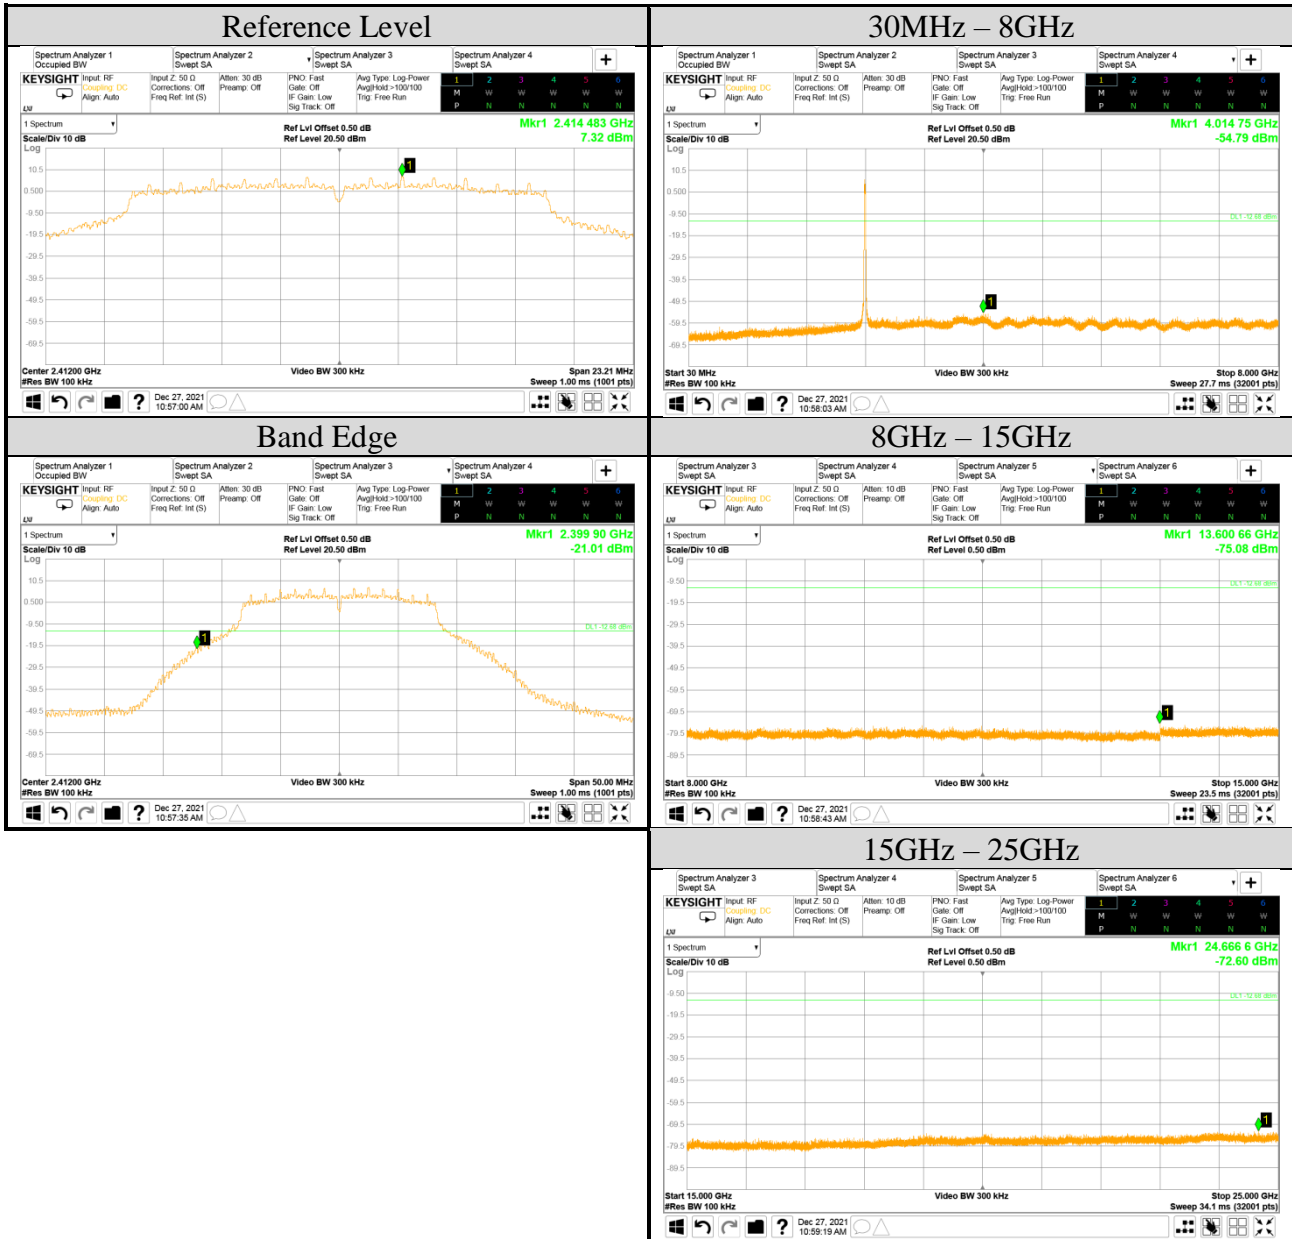

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2021/12/27	Temp./Hum.	14°C/70%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Kuper Hsu
Frequency	TX 2442MHz		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			0

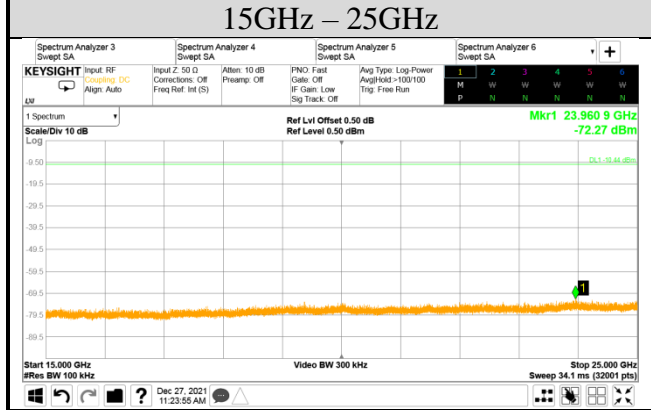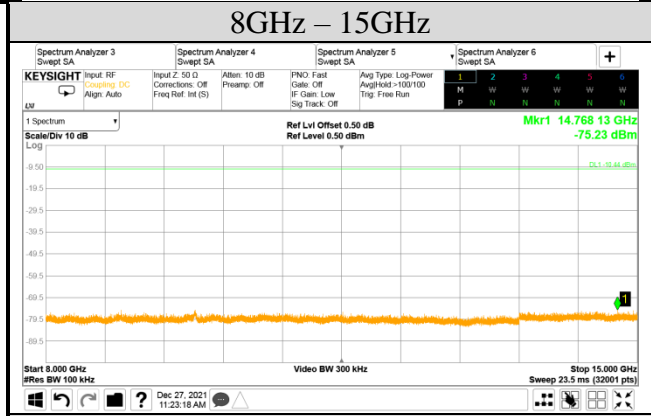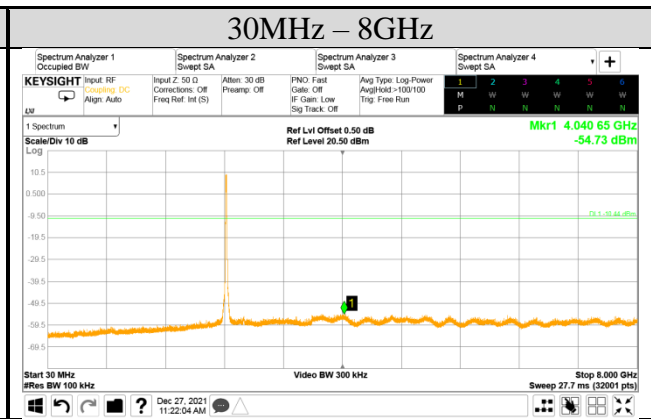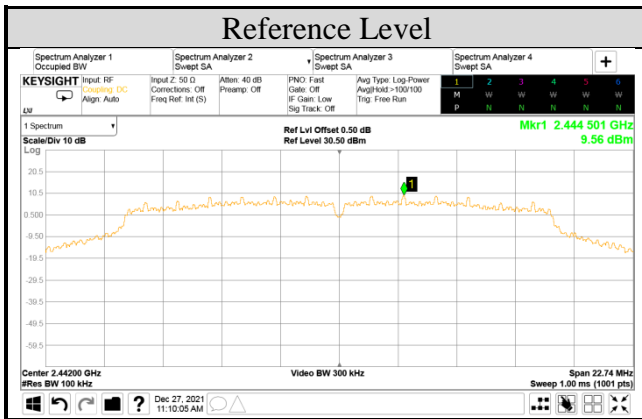

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2021/12/27	Temp./Hum.	14°C/70%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Kuper Hsu
Frequency	TX 2462MHz		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			0

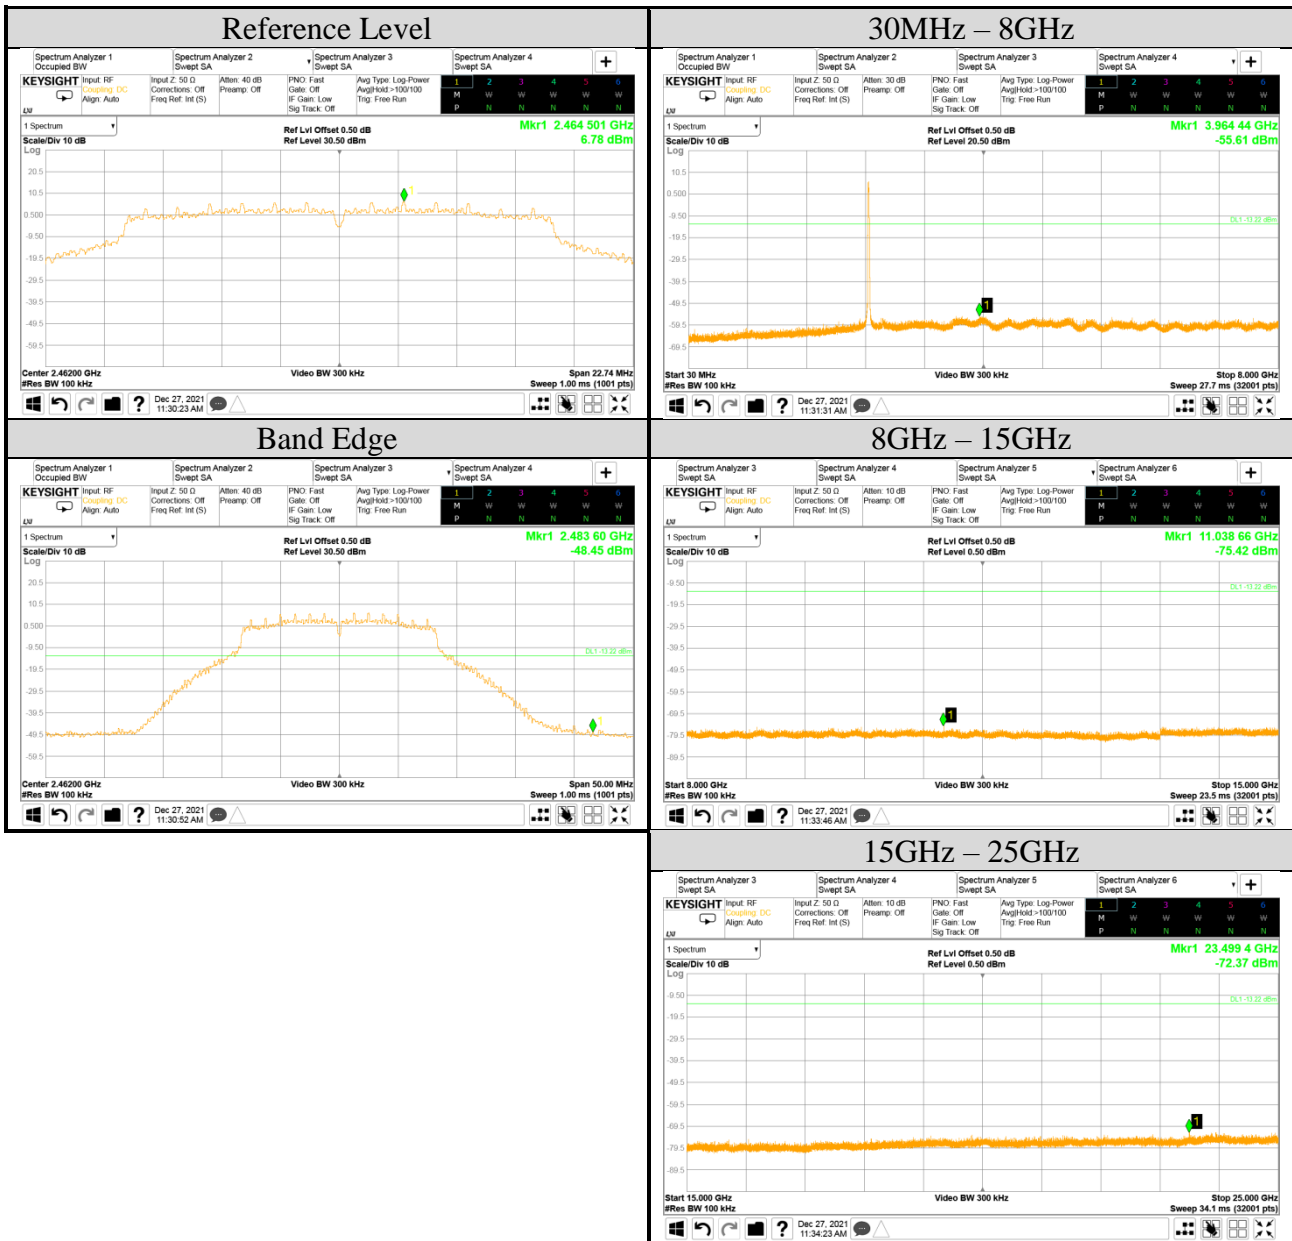

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2021/12/27	Temp./Hum.	14°C/70%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Kuper Hsu
Frequency	TX 2472MHz		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			0

