

---


---

## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>6</b>
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	100
A.2.3 Emissions in Non-restricted Frequency Bands:.....	102
<b>A.3 6dB OCCUPIED BANDWIDTH</b> .....	<b>103</b>
A.3.1 Emission Bandwidth Result.....	103
A.3.2 Measurement Plots .....	105
<b>A.4 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>111</b>
A.4.1 Peak Output Power .....	111
A.4.2 Average Output Power (Reporting only).....	120
A.4.3 Measurement Plots .....	126
<b>A.5 EMISSION LIMITATIONS</b> .....	<b>128</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>155</b>
A.6.1 Power Spectral Density Result .....	155
A.6.2 Measurement Plots .....	157

## A.1 CONDUCTED EMISSION

Test Date	2021/09/22	Temp./Hum.	28°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

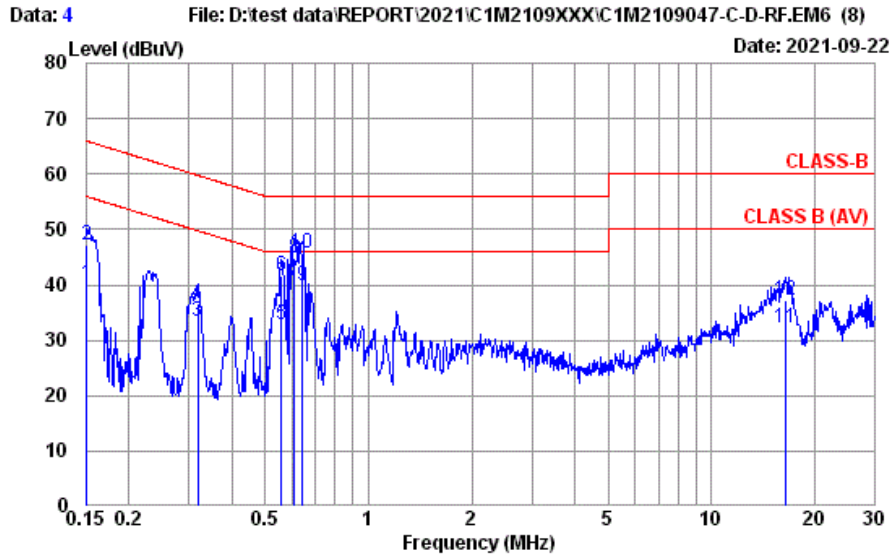


Site No. : No.8 Shielded Room Data No. : 4  
 Instrument 1 : Receiver ESR3(774)  
 Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : CLASS-B Phase : LINE  
 Environment : 28°C / 51% Engineer : Roy Hung  
 EUT Model : 14Z95P Test Rating : 120Vac/60Hz  
 Test Mode : Operating  
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.151	10.40	0.03	9.85	19.85	40.13	55.96	15.83	Average
2	0.151	10.40	0.03	9.85	26.97	47.25	65.96	18.71	QP
3	0.318	10.38	0.03	9.85	13.22	33.48	49.75	16.27	Average
4	0.318	10.38	0.03	9.85	16.43	36.69	59.75	23.06	QP
5	0.558	10.37	0.03	9.85	12.44	32.69	46.00	13.31	Average
6	0.558	10.37	0.03	9.85	21.42	41.67	56.00	14.33	QP
7	0.608	10.37	0.03	9.85	20.41	40.66	46.00	5.34	Average
8	0.608	10.37	0.03	9.85	24.66	44.91	56.00	11.09	QP
9	0.641	10.38	0.04	9.85	19.61	39.88	46.00	6.12	Average
10	0.641	10.38	0.04	9.85	25.46	45.73	56.00	10.27	QP
11	16.398	10.71	0.18	9.92	11.55	32.36	50.00	17.64	Average
12	16.398	10.71	0.18	9.92	16.40	37.21	60.00	22.79	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/09/22	Temp./Hum.	28°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

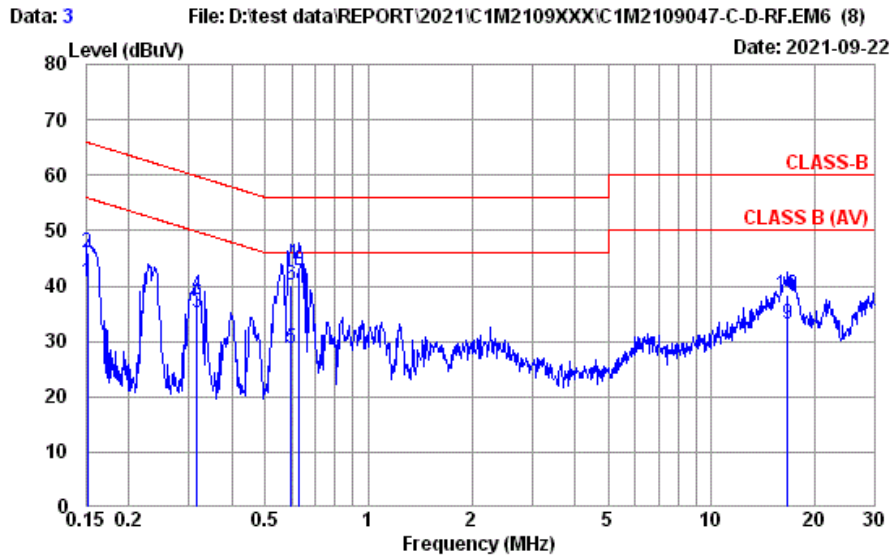


Site No. : No.8 Shielded Room Data No. : 3  
 Instrument 1 : Receiver ESR3(774)  
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : CLASS-B Phase : NEUTRAL  
 Environment : 28°C / 51% Engineer : Roy Hung  
 EUT Model : 14Z95P Test Rating : 120Vac/60Hz  
 Test Mode : Operating  
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	20.39	40.68	55.91	15.23	Average
2	0.152	10.41	0.03	9.85	25.81	46.10	65.91	19.81	QP
3	0.317	10.38	0.03	9.85	14.84	35.10	49.80	14.70	Average
4	0.317	10.38	0.03	9.85	18.15	38.41	59.80	21.39	QP
5	0.595	10.37	0.03	9.85	8.41	28.66	46.00	17.34	Average
6	0.595	10.37	0.03	9.85	19.90	40.15	56.00	15.85	QP
7	0.627	10.37	0.03	9.85	20.33	40.58	46.00	5.42	Average
8	0.627	10.37	0.03	9.85	22.64	42.89	56.00	13.11	QP
9	16.661	10.99	0.18	9.92	12.05	33.14	50.00	16.86	Average
10	16.661	10.99	0.18	9.92	17.42	38.51	60.00	21.49	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/09/22	Temp./Hum.	28°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

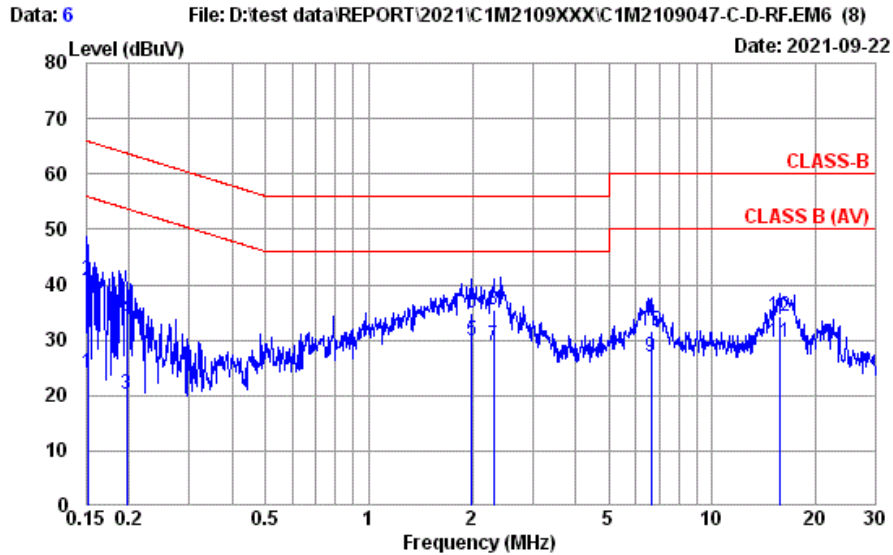


Site No. : No.8 Shielded Room Data No. : 6  
 Instrument 1 : Receiver ESR3(774)  
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : CLASS-B Phase : NEUTRAL  
 Environment : 28°C / 51% Engineer : Roy Hung  
 EUT Model : 14795P Test Rating : 120Vac/60Hz  
 Test Mode : Operating Luxshare

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	3.81	24.10	55.91	31.81	Average
2	0.152	10.41	0.03	9.85	20.34	40.63	65.91	25.28	QP
3	0.197	10.39	0.03	9.85	0.06	20.33	53.72	33.39	Average
4	0.197	10.39	0.03	9.85	13.56	33.83	63.72	29.89	QP
5	1.991	10.41	0.06	9.86	9.42	29.75	46.00	16.25	Average
6	1.991	10.41	0.06	9.86	14.44	34.77	56.00	21.23	QP
7	2.309	10.42	0.07	9.86	8.64	28.99	46.00	17.01	Average
8	2.309	10.42	0.07	9.86	15.17	35.52	56.00	20.48	QP
9	6.627	10.58	0.11	9.87	6.47	27.03	50.00	22.97	Average
10	6.627	10.58	0.11	9.87	11.08	31.64	60.00	28.36	QP
11	15.801	10.96	0.18	9.92	8.46	29.52	50.00	20.48	Average
12	15.801	10.96	0.18	9.92	13.23	34.29	60.00	25.71	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/09/22	Temp./Hum.	28°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

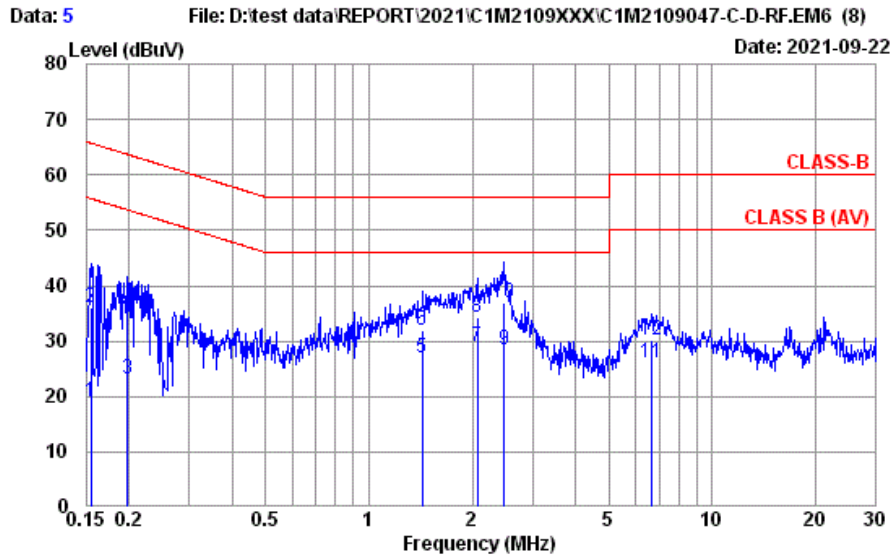

Site No. : No.8 Shielded Room Data No. : 5  
 Instrument 1 : Receiver ESR3(774)  
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)  
 Limit : CLASS-B Phase : LINE  
 Environment : 28°C / 51% Engineer : Roy Hung  
 EUT Model : 14Z95P Test Rating : 120Vac/60Hz  
 Test Mode : Operating  
 Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.155	10.40	0.03	9.85	-1.12	19.16	55.74	36.58	Average
2	0.155	10.40	0.03	9.85	15.84	36.12	65.74	29.62	QP
3	0.198	10.39	0.03	9.85	2.99	23.26	53.71	30.45	Average
4	0.198	10.39	0.03	9.85	14.92	35.19	63.71	28.52	QP
5	1.433	10.39	0.05	9.86	6.76	27.06	46.00	18.94	Average
6	1.433	10.39	0.05	9.86	11.76	32.06	56.00	23.94	QP
7	2.066	10.40	0.06	9.86	8.71	29.03	46.00	16.97	Average
8	2.066	10.40	0.06	9.86	14.08	34.40	56.00	21.60	QP
9	2.475	10.41	0.07	9.86	7.99	28.33	46.00	17.67	Average
10	2.475	10.41	0.07	9.86	16.44	36.78	56.00	19.22	QP
11	6.662	10.50	0.11	9.87	5.49	25.97	50.00	24.03	Average
12	6.662	10.50	0.11	9.87	9.69	30.17	60.00	29.83	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

## A.2 RADIATED EMISSION

Test Date	2021/09/15~24	Temp./Hum.	25°C/52~62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #1 (with INPAQ Antenna)		

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

## A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	36.28	34.23	40.00	5.77	Peak
119.240	17.95	2.52	26.17	47.40	41.70	43.50	1.80	Peak
323.910	19.70	4.64	25.90	45.35	43.79	46.00	2.21	Peak
668.260	24.64	7.12	27.45	35.11	39.42	46.00	6.58	Peak
742.950	25.30	7.51	27.40	32.78	38.19	46.00	7.81	Peak
965.080	26.85	8.79	26.79	31.16	40.01	54.00	13.99	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	35.32	33.27	40.00	6.73	Peak
120.210	17.96	2.53	26.17	44.68	39.00	43.50	4.50	Peak
237.580	17.48	3.74	25.76	45.53	40.99	46.00	5.01	Peak
593.570	24.23	6.75	27.42	36.14	39.70	46.00	6.30	Peak
742.950	25.30	7.51	27.40	38.73	44.14	46.00	1.86	Peak
960.230	26.80	8.76	26.82	29.44	38.18	54.00	15.82	Peak

Mode	BLE(2M)	Frequency	TX 2440MHz
------	---------	-----------	------------

## Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	35.29	33.24	40.00	6.76	Peak
121.180	17.91	2.54	26.16	47.30	41.59	43.50	1.91	Peak
318.090	19.52	4.55	25.85	45.63	43.85	46.00	2.15	Peak
593.570	24.23	6.75	27.42	35.81	39.37	46.00	6.63	Peak
742.950	25.30	7.51	27.40	37.44	42.85	46.00	3.15	Peak
977.690	26.96	8.86	26.75	29.55	38.62	54.00	15.38	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	39.30	37.25	40.00	2.75	Peak
122.150	17.87	2.55	26.16	45.72	39.98	43.50	3.52	Peak
236.610	17.43	3.73	25.76	46.44	41.84	46.00	4.16	Peak
593.570	24.23	6.75	27.42	36.72	40.28	46.00	5.72	Peak
742.950	25.30	7.51	27.40	37.96	43.37	46.00	2.63	Peak
971.870	26.91	8.83	26.79	29.63	38.58	54.00	15.42	Peak


A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics

**Band Edge:**

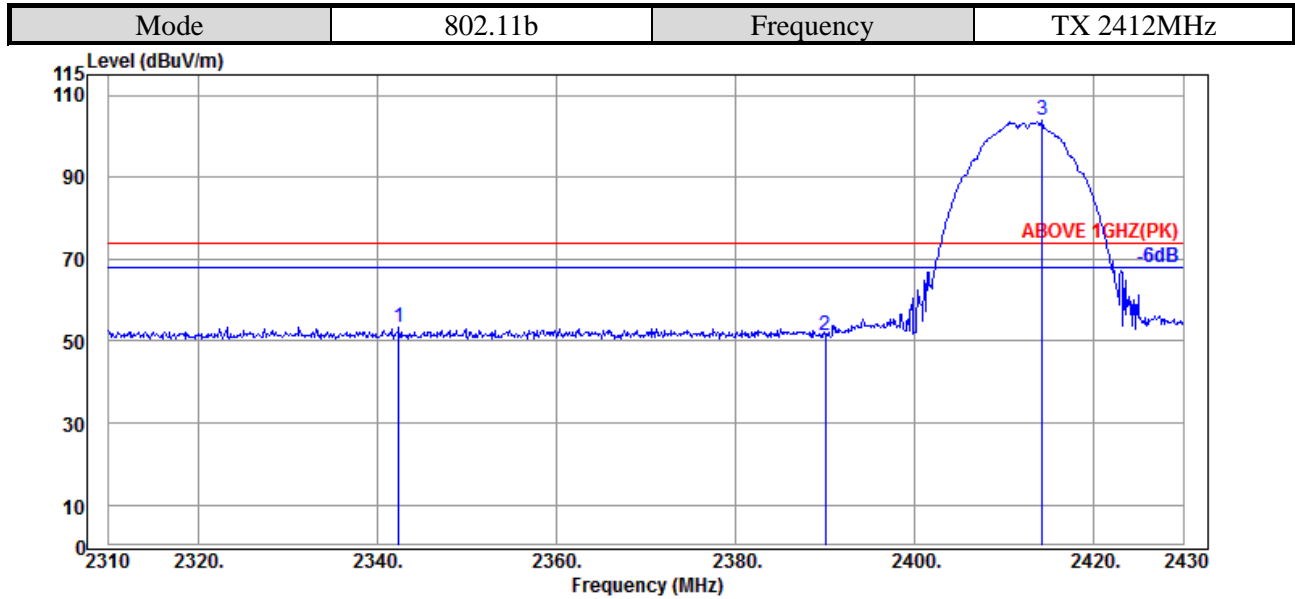

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.400	32.05	7.92	34.53	48.01	53.45	74.00	20.55	Peak
2390.040	31.89	7.95	34.54	45.88	51.18	74.00	22.82	Peak
@ 2414.280	31.94	7.96	34.54	98.62	103.98	---	---	Peak

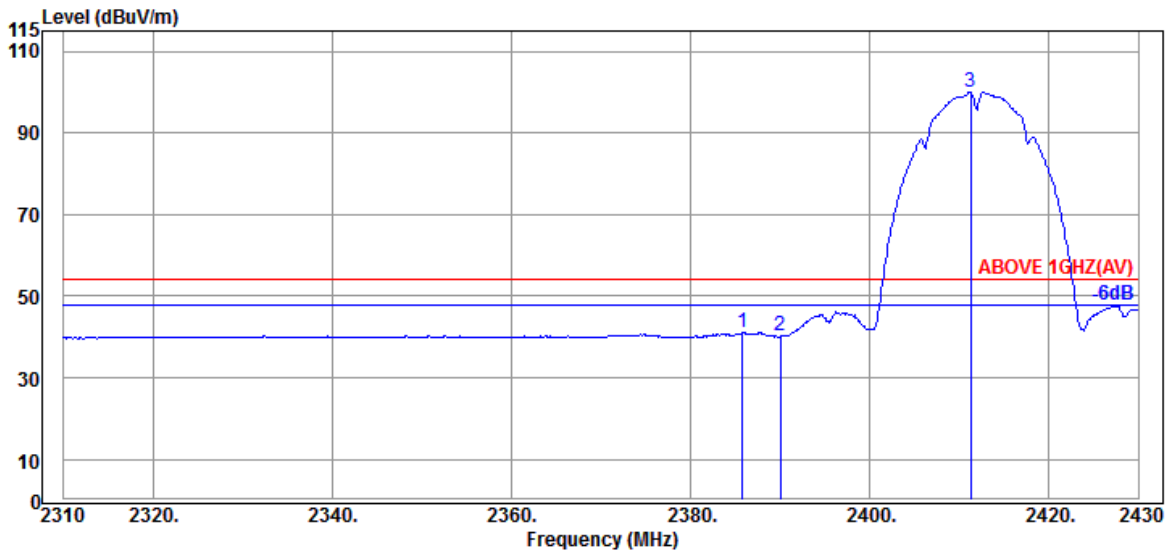


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.840	31.89	7.95	34.53	35.73	41.04	54.00	12.96	Average
2390.040	31.89	7.95	34.54	34.85	40.15	54.00	13.85	Average
@ 2411.280	31.94	7.96	34.54	94.63	99.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

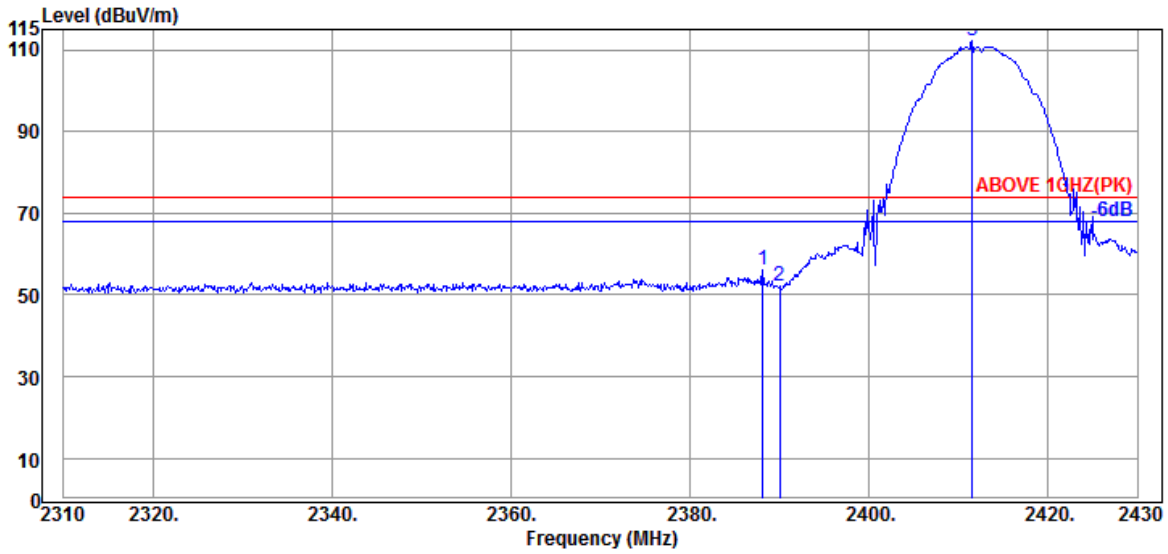

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	31.89	7.95	34.53	50.80	56.11	74.00	17.89	Peak
2390.040	31.89	7.95	34.54	46.86	52.16	74.00	21.84	Peak
@ 2411.520	31.94	7.96	34.54	106.79	112.15	---	---	Peak

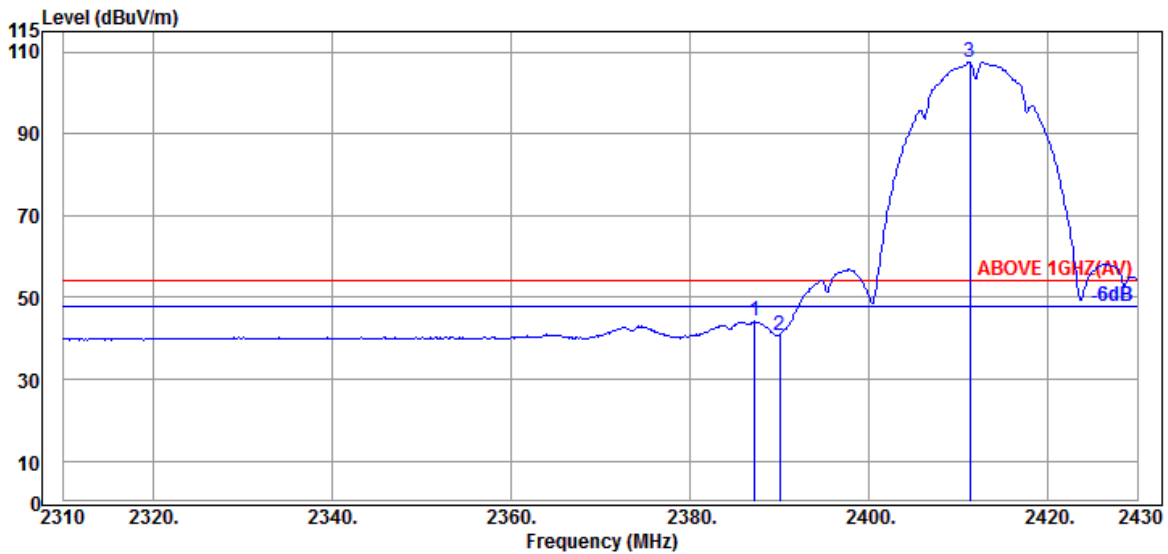


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.280	31.89	7.95	34.53	38.76	44.07	54.00	9.93	Average
2390.040	31.89	7.95	34.54	35.56	40.86	54.00	13.14	Average
@ 2411.280	31.94	7.96	34.54	102.07	107.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

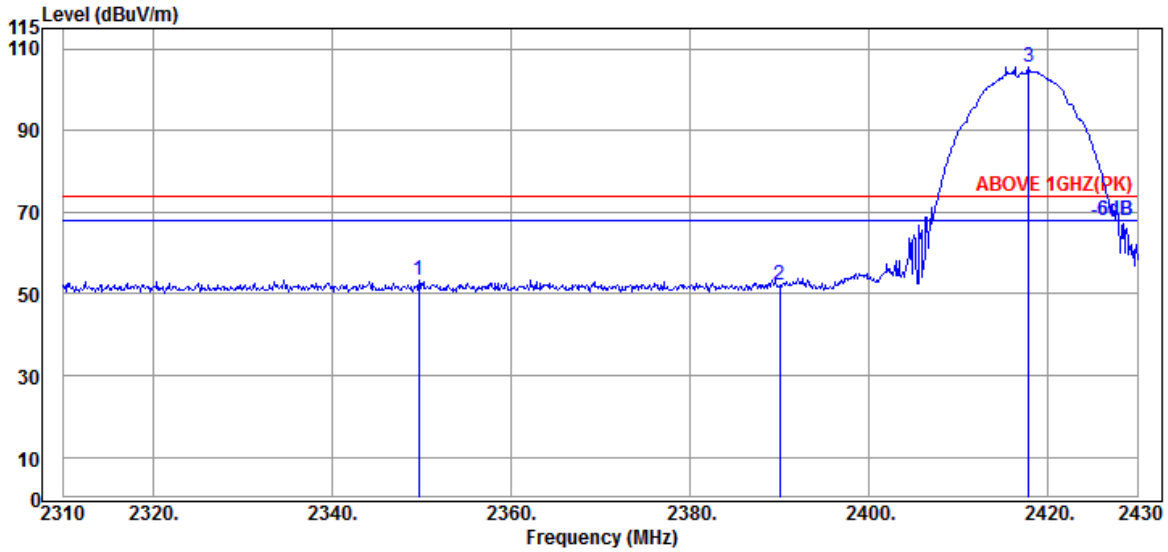

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2349.720	32.10	7.93	34.53	47.96	53.46	74.00	20.54	Peak
2390.040	31.89	7.95	34.54	47.00	52.30	74.00	21.70	Peak
@ 2417.880	31.94	7.96	34.54	100.19	105.55	---	---	Peak

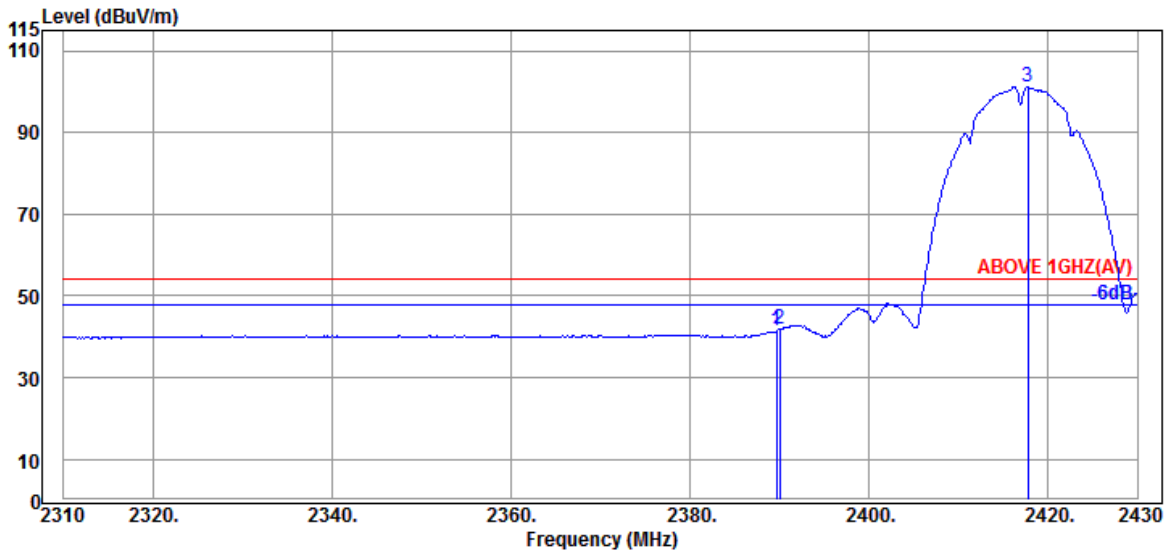


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	36.18	41.49	54.00	12.51	Average
2390.040	31.89	7.95	34.54	36.54	41.84	54.00	12.16	Average
@ 2417.760	31.94	7.96	34.54	95.73	101.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

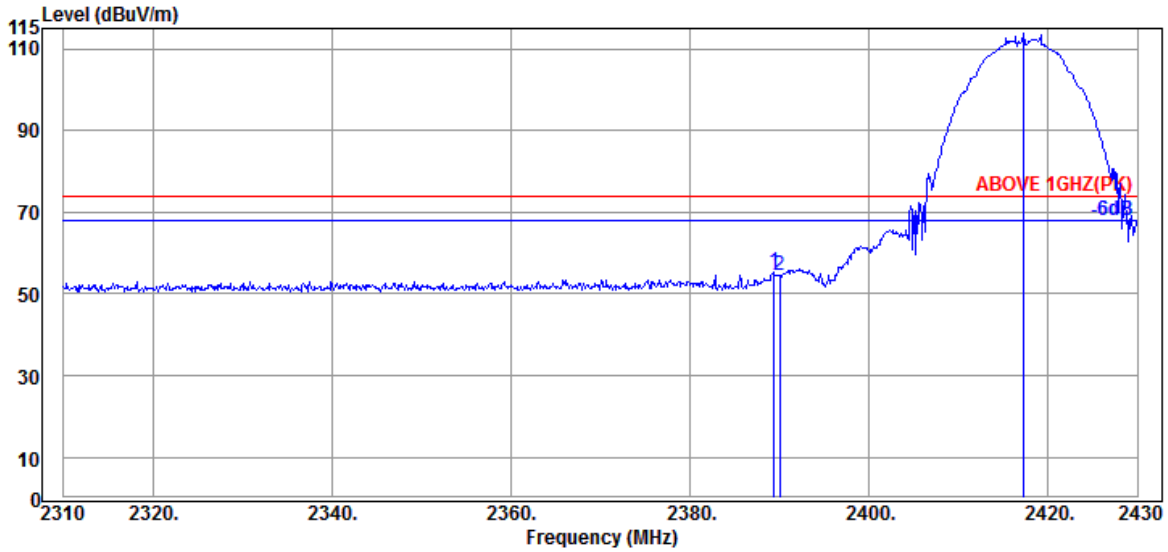

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	49.94	55.25	74.00	18.75	Peak
2390.040	31.89	7.95	34.54	49.22	54.52	74.00	19.48	Peak
@ 2417.280	31.94	7.96	34.54	108.58	113.94	---	---	Peak

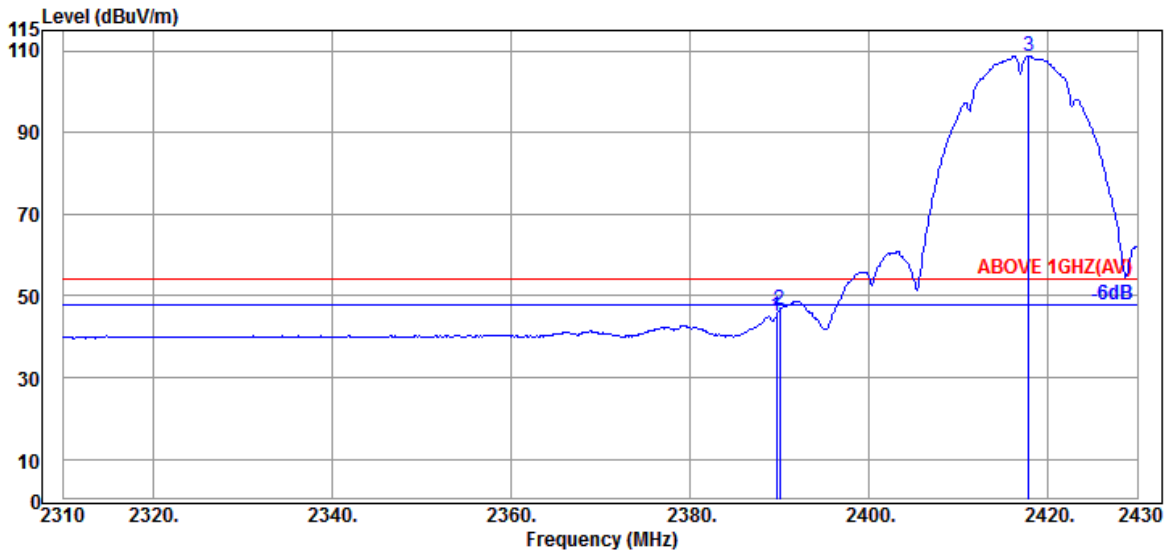


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	39.80	45.11	54.00	8.89	Average
2390.040	31.89	7.95	34.54	41.33	46.63	54.00	7.37	Average
@ 2417.880	31.94	7.96	34.54	103.44	108.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

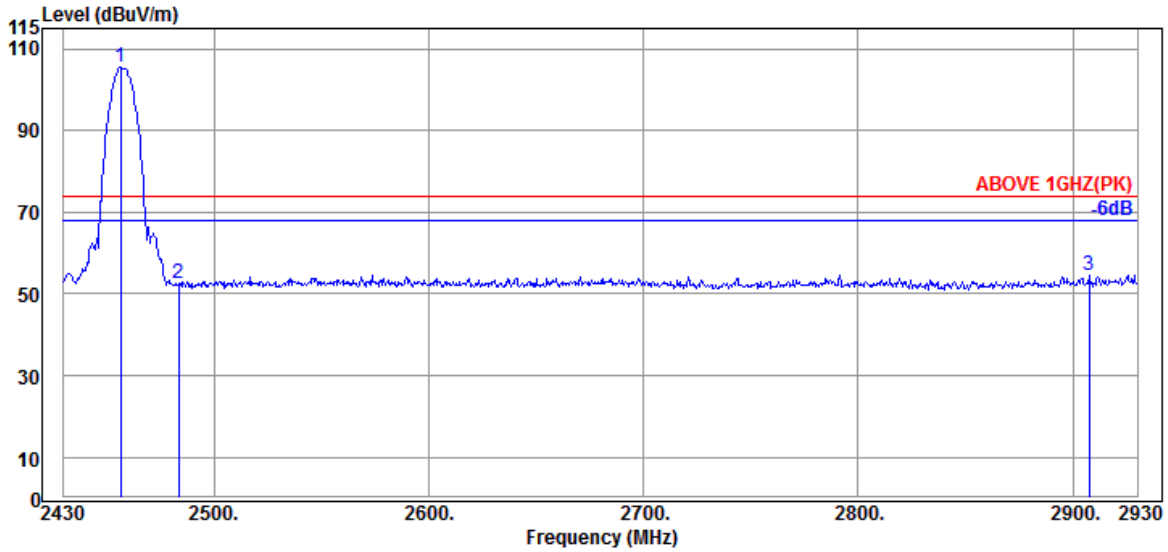

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	32.30	7.98	34.55	99.77	105.50	---	---	Peak
2483.500	32.30	7.99	34.55	46.63	52.37	74.00	21.63	Peak
2907.500	32.77	8.18	34.64	48.15	54.46	74.00	19.54	Peak

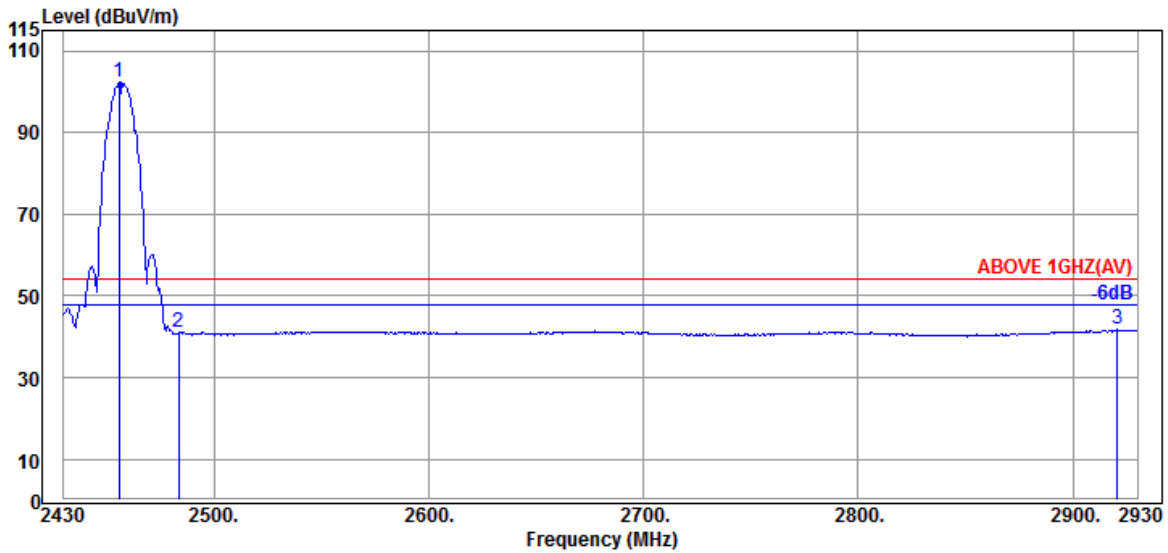


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	96.59	102.32	---	---	Average
2483.500	32.30	7.99	34.55	35.24	40.98	54.00	13.02	Average
2920.500	32.90	8.19	34.64	35.25	41.70	54.00	12.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

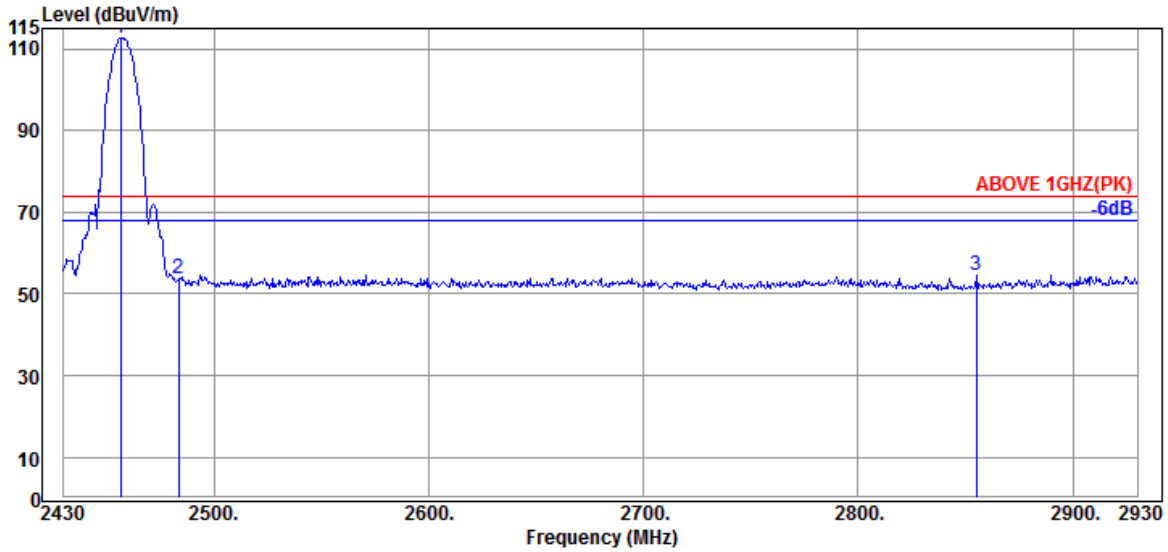

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	32.30	7.98	34.55	106.94	112.67	---	---	Peak
2483.500	32.30	7.99	34.55	47.98	53.72	74.00	20.28	Peak
2855.000	32.28	8.16	34.63	48.92	54.73	74.00	19.27	Peak

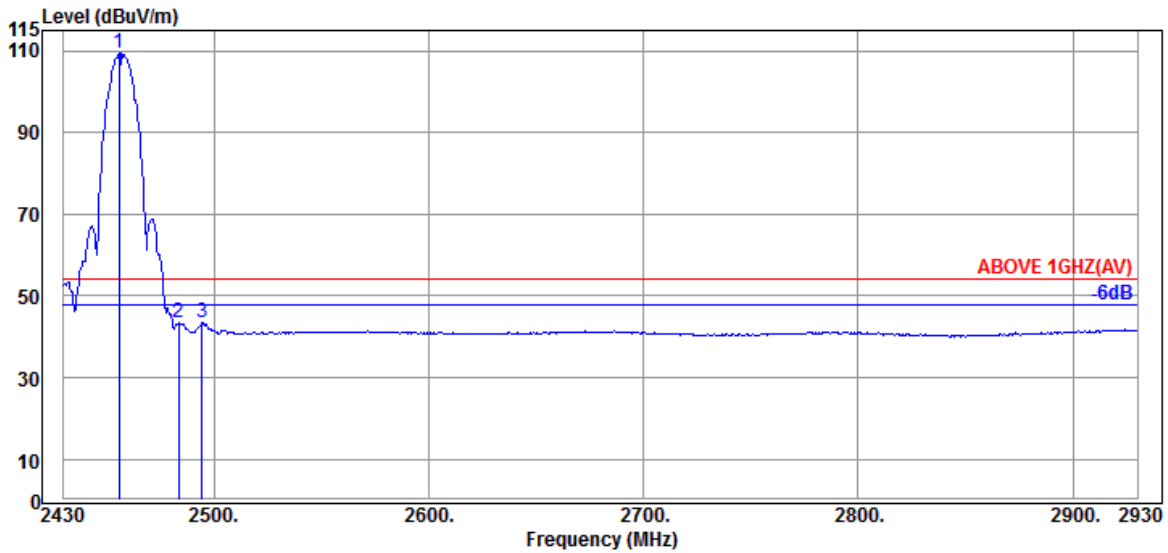


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	103.81	109.54	---	---	Average
2483.500	32.30	7.99	34.55	37.74	43.48	54.00	10.52	Average
2494.500	32.30	8.00	34.56	37.89	43.63	54.00	10.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

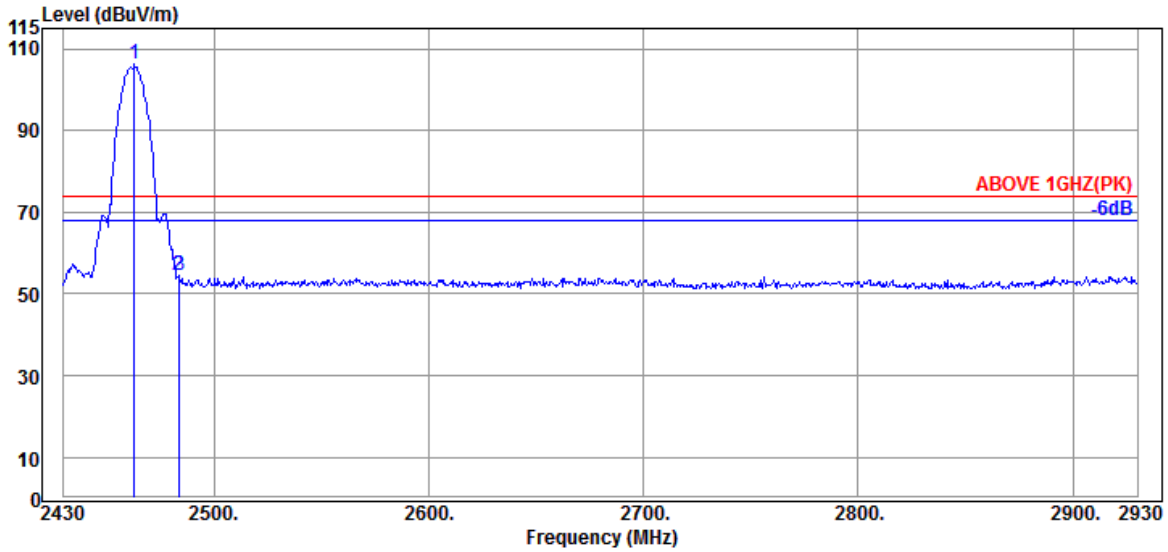

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	32.30	7.98	34.55	100.73	106.46	---	---	Peak
2483.500	32.30	7.99	34.55	48.75	54.49	74.00	19.51	Peak
2484.000	32.30	7.99	34.55	48.73	54.47	74.00	19.53	Peak

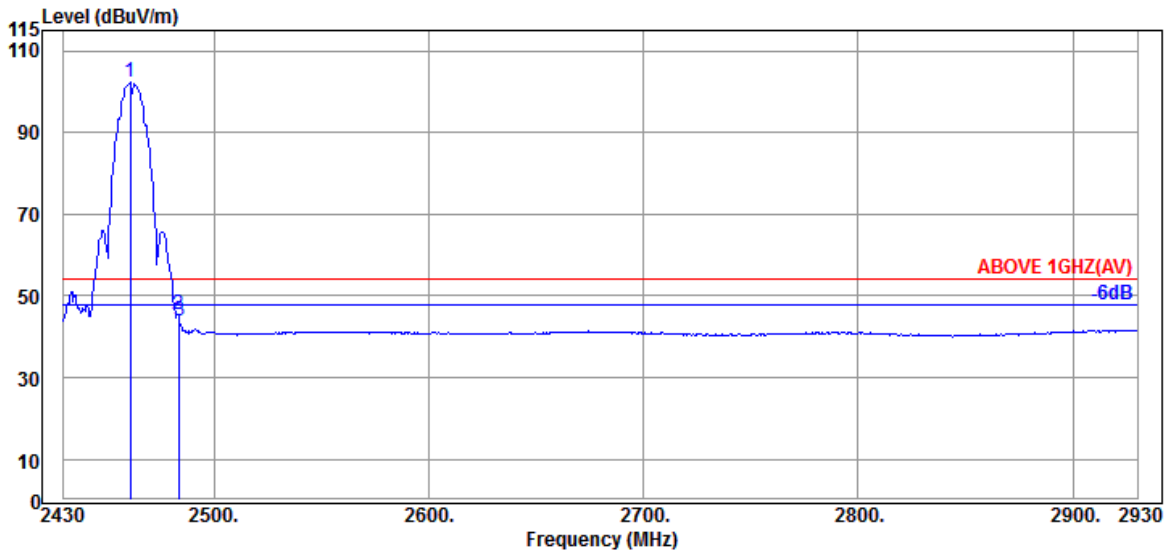


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	96.72	102.45	---	---	Average
2483.500	32.30	7.99	34.55	39.67	45.41	54.00	8.59	Average
2484.000	32.30	7.99	34.55	38.10	43.84	54.00	10.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

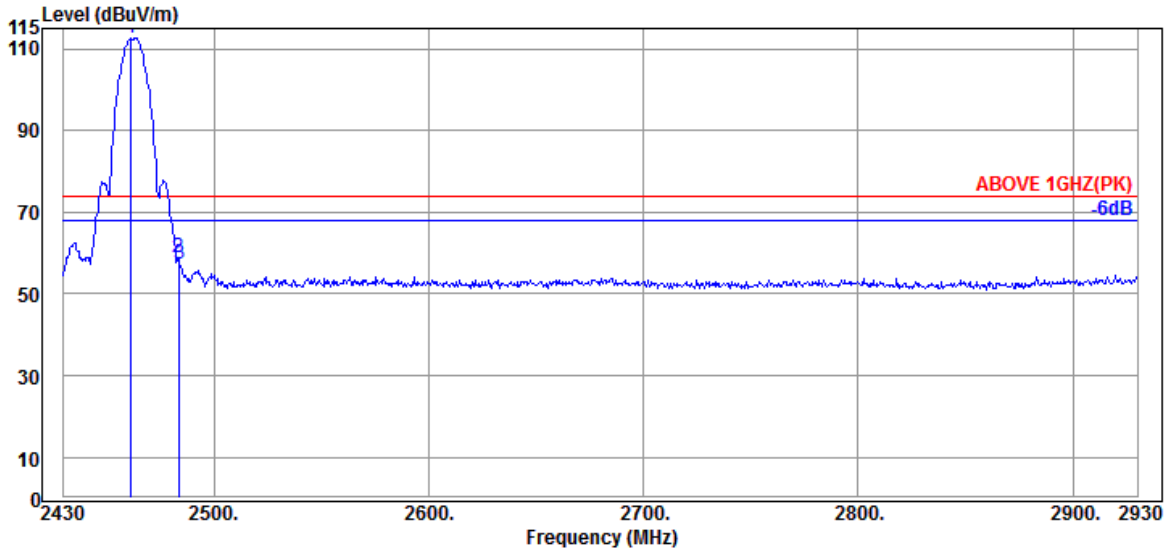

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.500	32.30	7.98	34.55	107.07	112.80	---	---	Peak
2483.500	32.30	7.99	34.55	52.97	58.71	74.00	15.29	Peak
2484.000	32.30	7.99	34.55	51.72	57.46	74.00	16.54	Peak

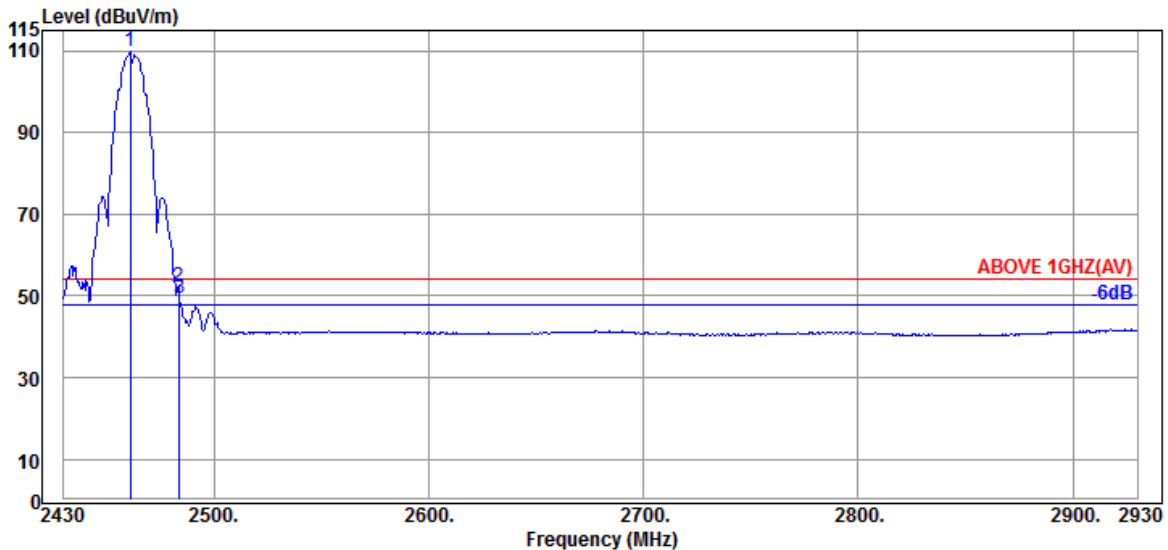


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	103.94	109.67	---	---	Average
2483.500	32.30	7.99	34.55	46.27	52.01	54.00	1.99	Average
2484.000	32.30	7.99	34.55	43.66	49.40	54.00	4.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

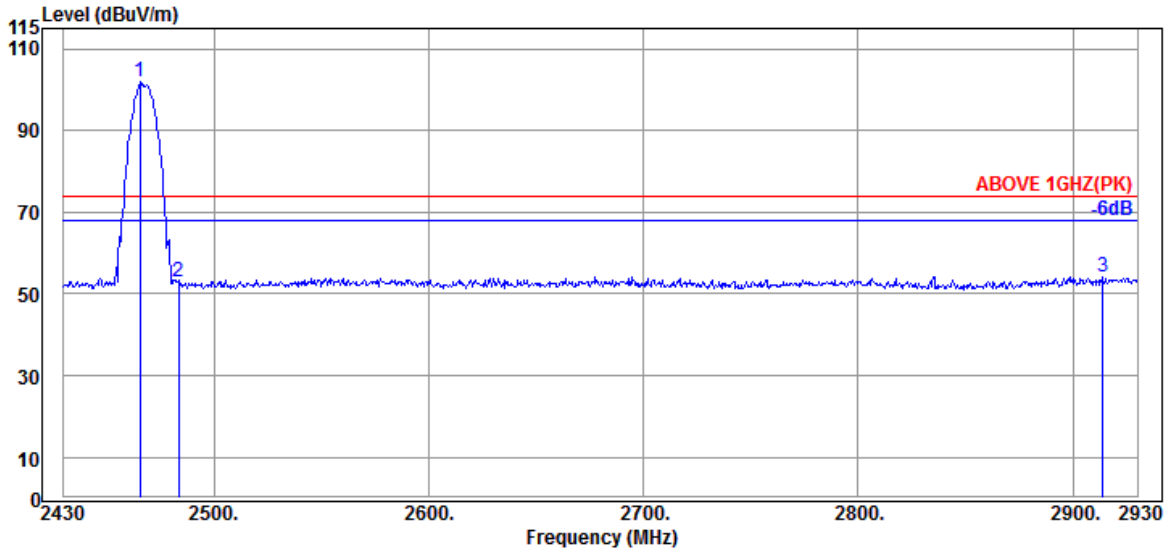

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	96.12	101.85	---	---	Peak
2483.500	32.30	7.99	34.55	47.11	52.85	74.00	21.15	Peak
2914.000	32.83	8.18	34.64	47.78	54.15	74.00	19.85	Peak

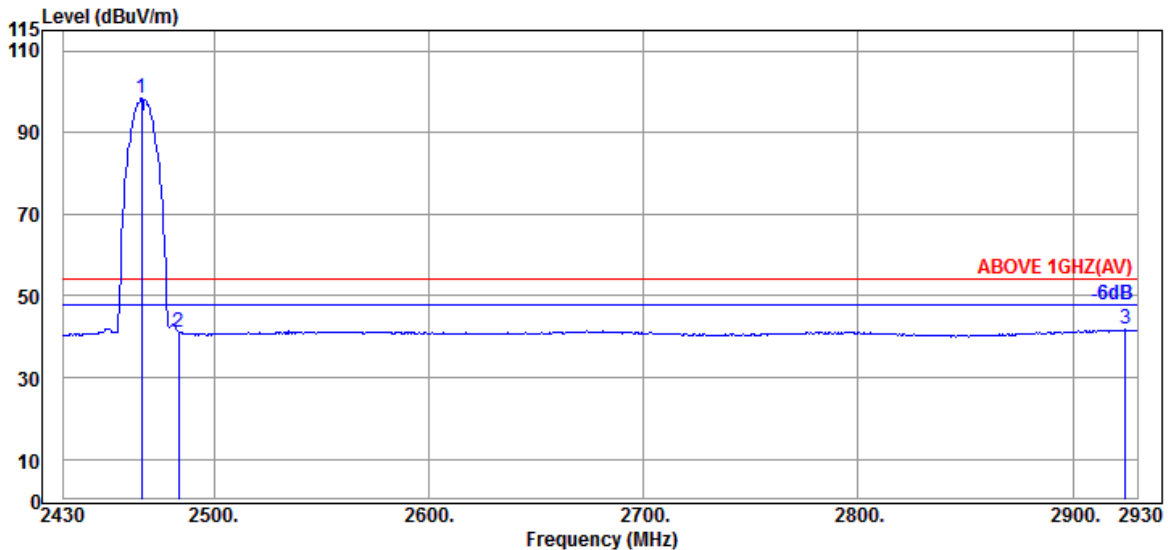


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	32.30	7.98	34.55	92.57	98.30	---	---	Average
2483.500	32.30	7.99	34.55	35.25	40.99	54.00	13.01	Average
2924.500	32.90	8.19	34.64	35.37	41.82	54.00	12.18	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

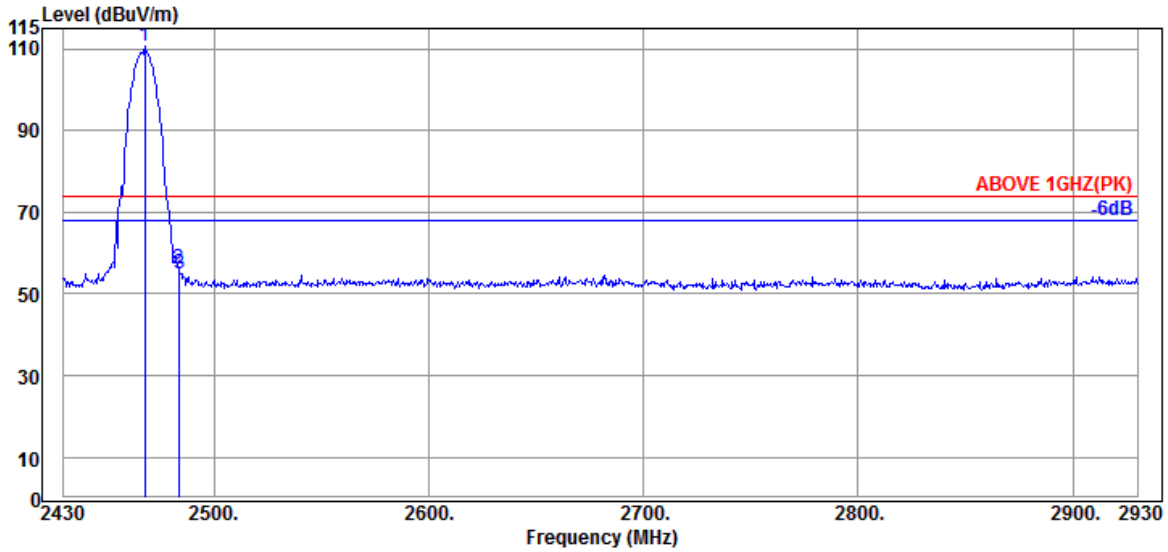

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.000	32.30	7.98	34.55	104.76	110.49	---	---	Peak
2483.500	32.30	7.99	34.55	50.42	56.16	74.00	17.84	Peak
2484.000	32.30	7.99	34.55	49.38	55.12	74.00	18.88	Peak

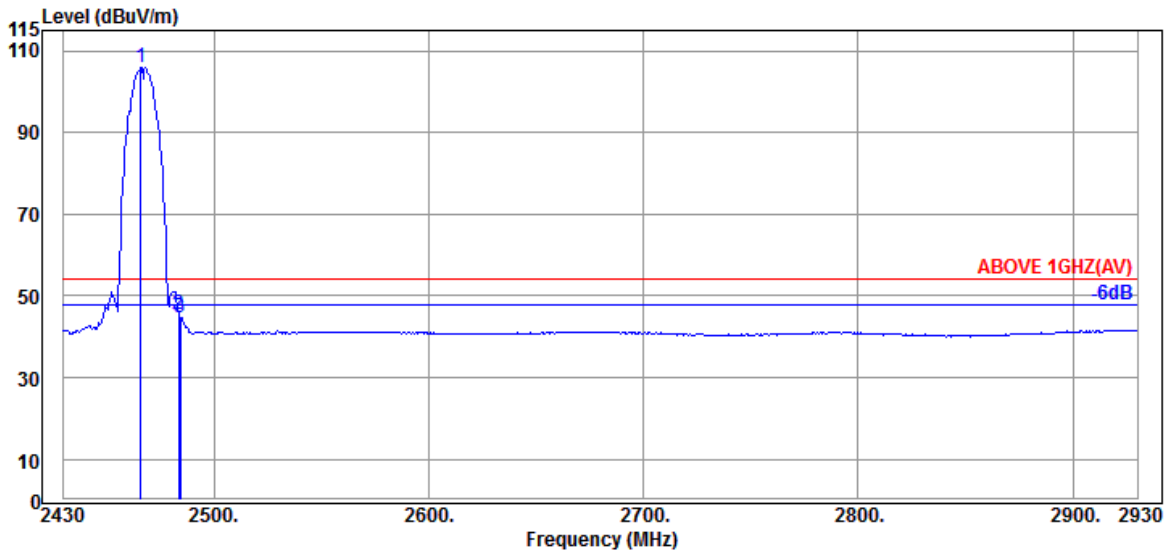


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	100.35	106.08	---	---	Average
2483.500	32.30	7.99	34.55	39.60	45.34	54.00	8.66	Average
2484.500	32.30	7.99	34.55	39.05	44.79	54.00	9.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

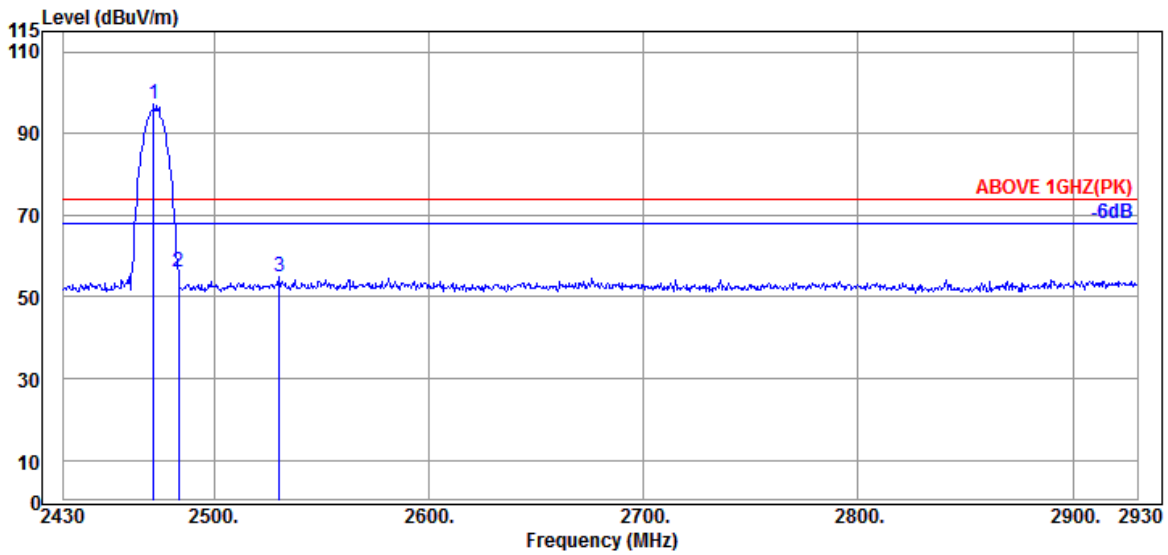

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	32.30	7.99	34.55	91.64	97.38	---	---	Peak
2483.500	32.30	7.99	34.55	50.41	56.15	74.00	17.85	Peak
2530.500	32.41	8.02	34.57	49.08	54.94	74.00	19.06	Peak

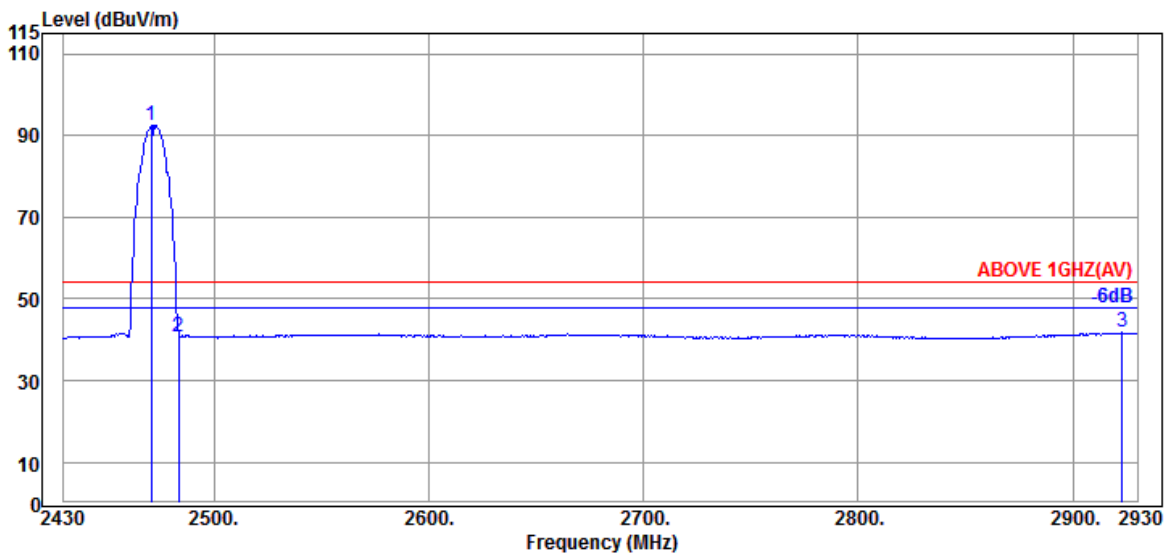


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	7.99	34.55	86.89	92.63	---	---	Average
2483.500	32.30	7.99	34.55	35.11	40.85	54.00	13.15	Average
2923.000	32.90	8.19	34.64	35.29	41.74	54.00	12.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

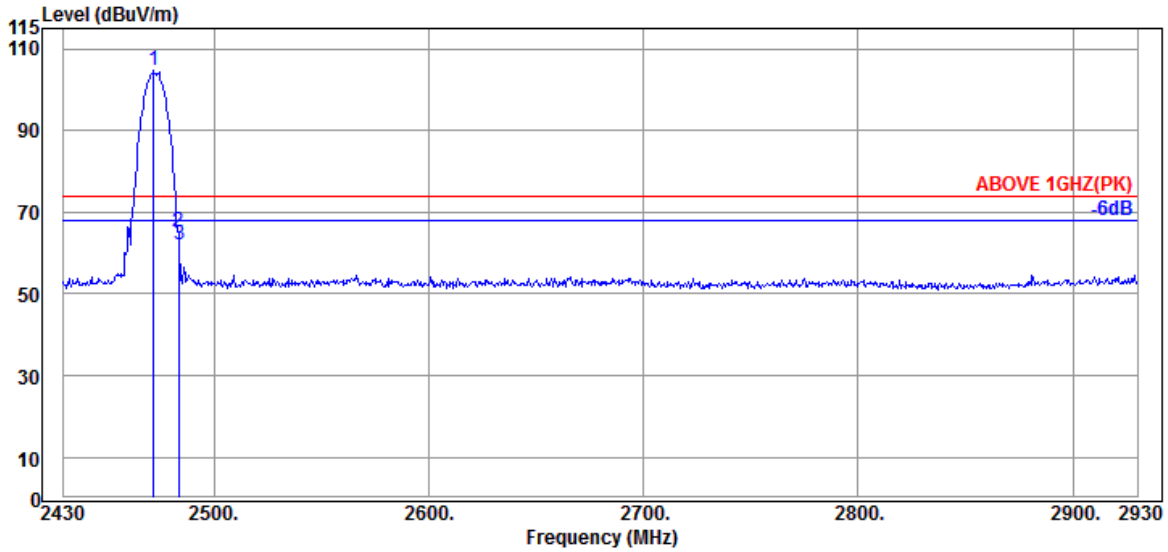

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	32.30	7.99	34.55	99.07	104.81	---	---	Peak
2483.500	32.30	7.99	34.55	59.40	65.14	74.00	8.86	Peak
2484.000	32.30	7.99	34.55	56.29	62.03	74.00	11.97	Peak

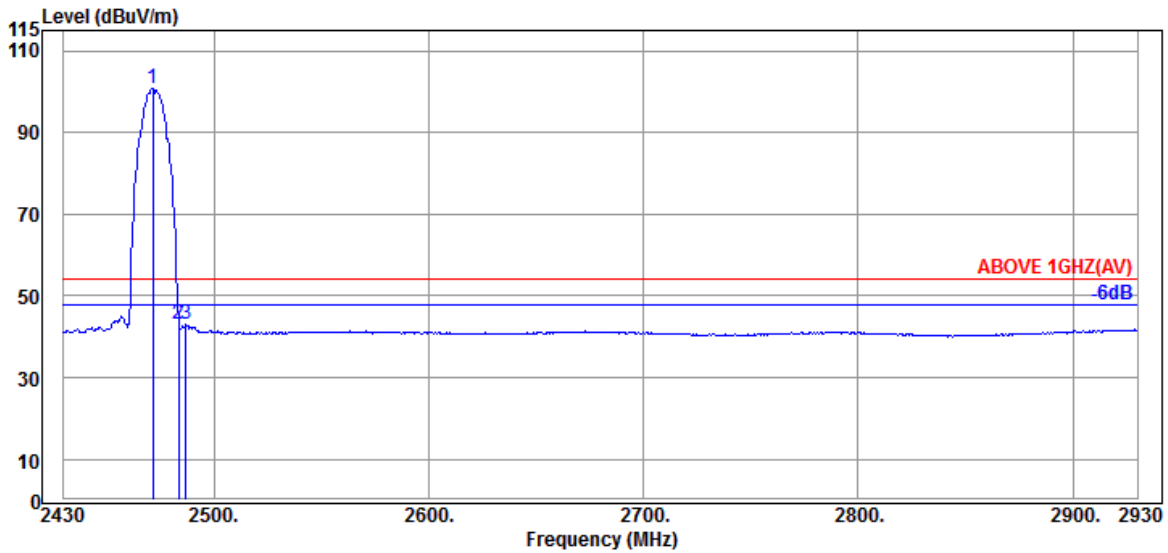


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	32.30	7.99	34.55	94.99	100.73	---	---	Average
2483.500	32.30	7.99	34.55	37.25	42.99	54.00	11.01	Average
2487.000	32.30	8.00	34.55	37.17	42.92	54.00	11.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

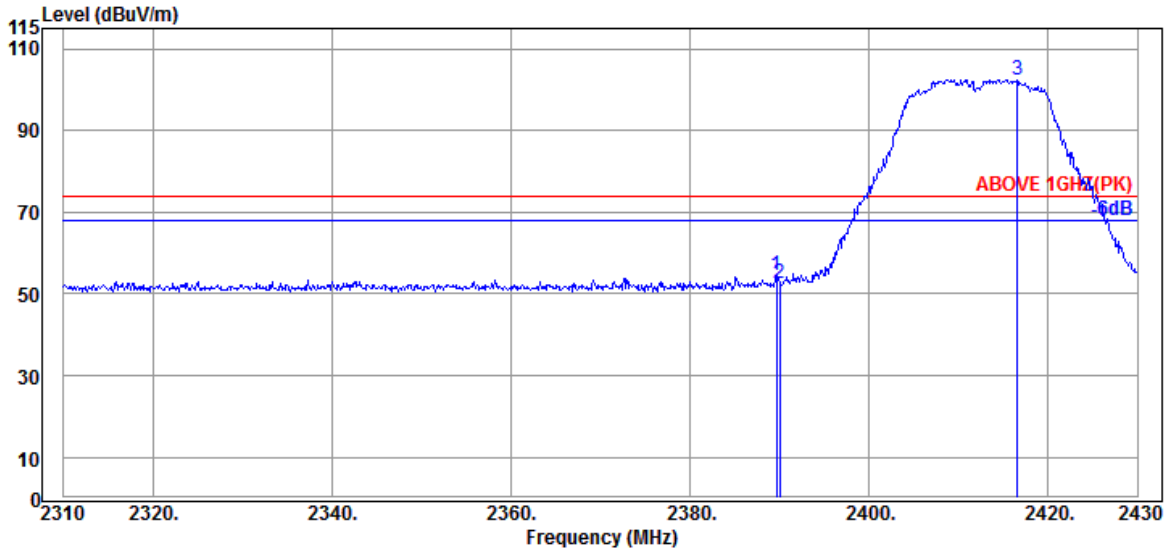

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	49.26	54.57	74.00	19.43	Peak
2390.040	31.89	7.95	34.54	47.30	52.60	74.00	21.40	Peak
@ 2416.560	31.94	7.96	34.54	97.18	102.54	---	---	Peak

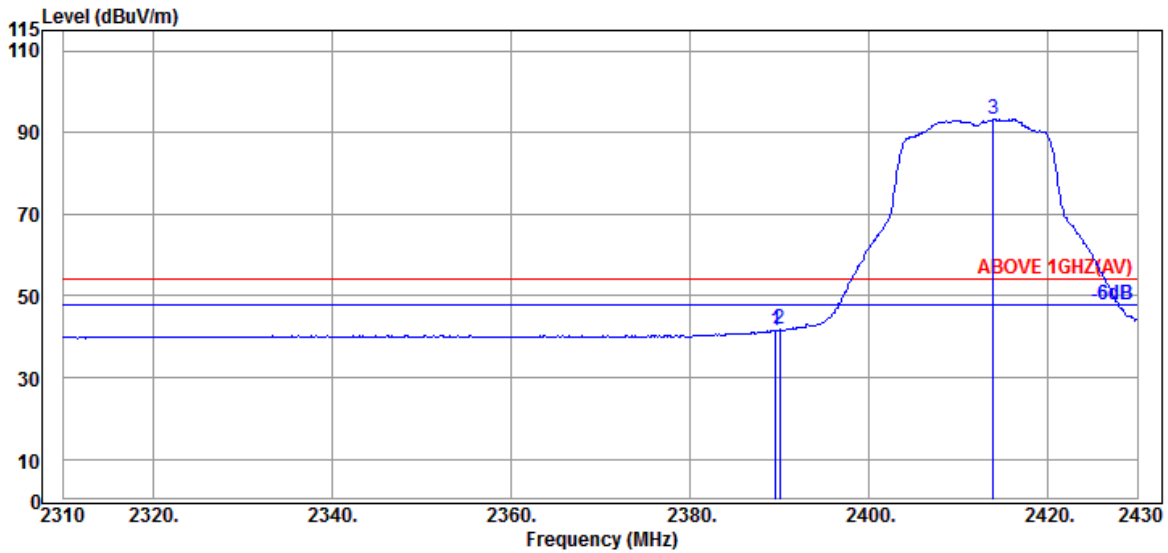


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	36.27	41.58	54.00	12.42	Average
2390.040	31.89	7.95	34.54	36.49	41.79	54.00	12.21	Average
@ 2413.920	31.94	7.96	34.54	87.88	93.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

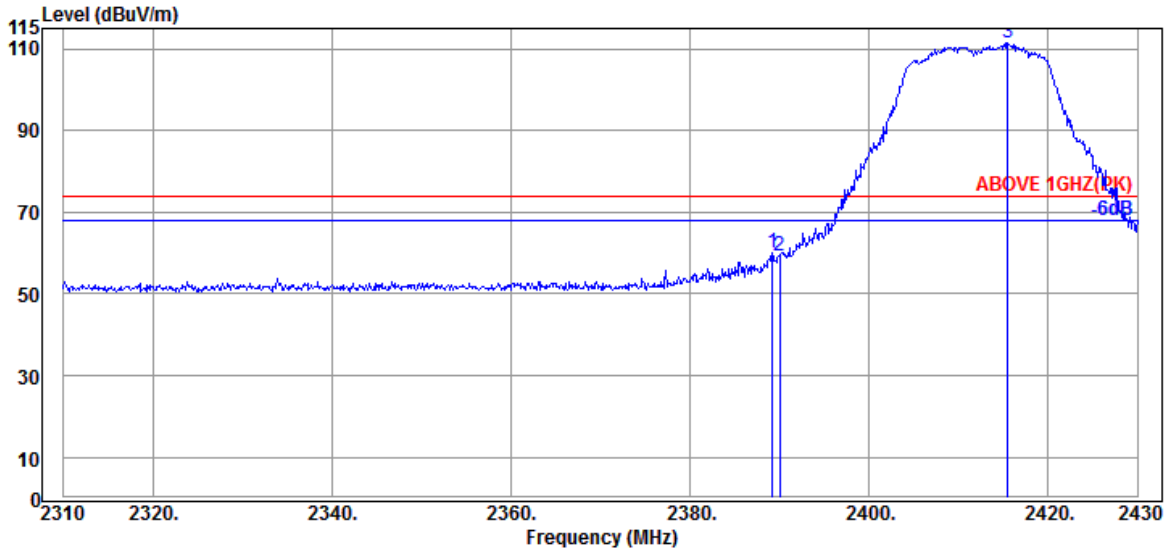

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	54.66	59.97	74.00	14.03	Peak
2390.040	31.89	7.95	34.54	53.87	59.17	74.00	14.83	Peak
@ 2415.480	31.94	7.96	34.54	106.20	111.56	---	---	Peak

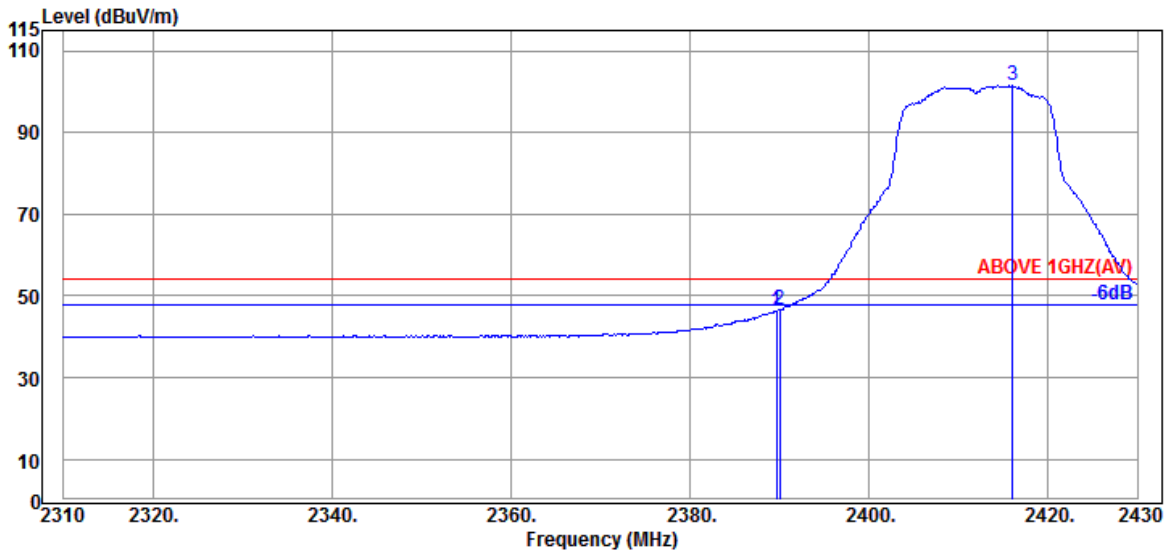


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	40.92	46.23	54.00	7.77	Average
2390.040	31.89	7.95	34.54	41.18	46.48	54.00	7.52	Average
@ 2416.080	31.94	7.96	34.54	96.09	101.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

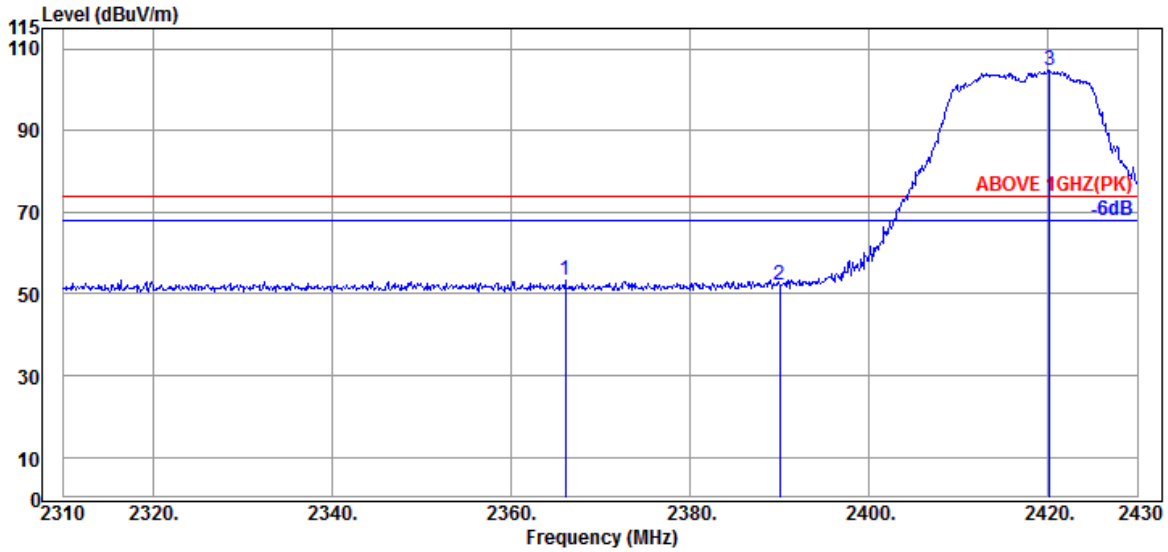

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2366.040	32.01	7.94	34.53	48.04	53.46	74.00	20.54	Peak
2390.040	31.89	7.95	34.54	46.90	52.20	74.00	21.80	Peak
@ 2420.160	32.01	7.96	34.54	99.42	104.85	---	---	Peak

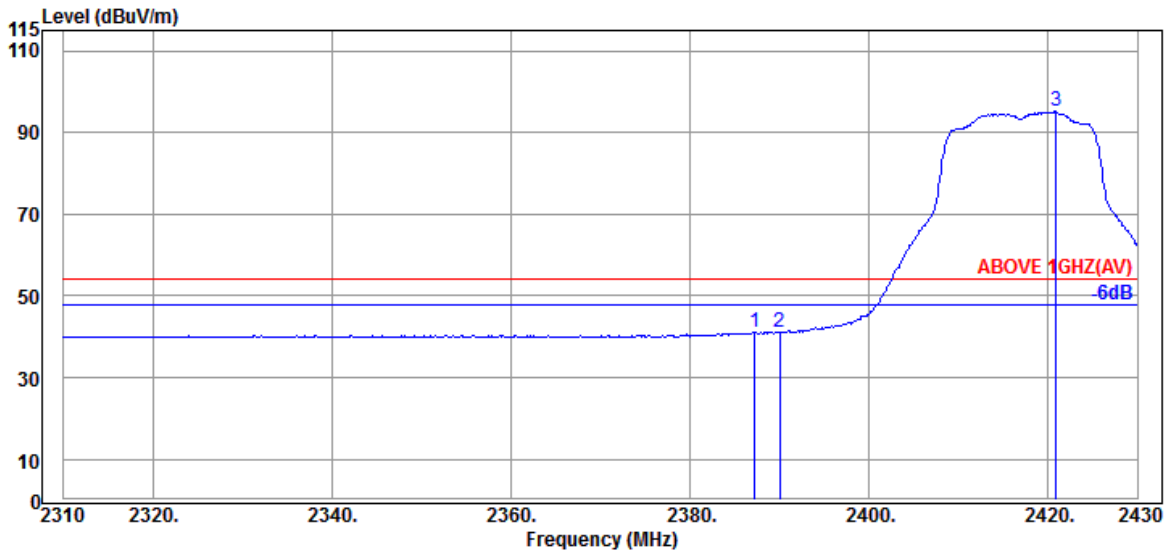


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.280	31.89	7.95	34.53	35.73	41.04	54.00	12.96	Average
2390.040	31.89	7.95	34.54	35.85	41.15	54.00	12.85	Average
@ 2420.880	32.01	7.96	34.54	89.71	95.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

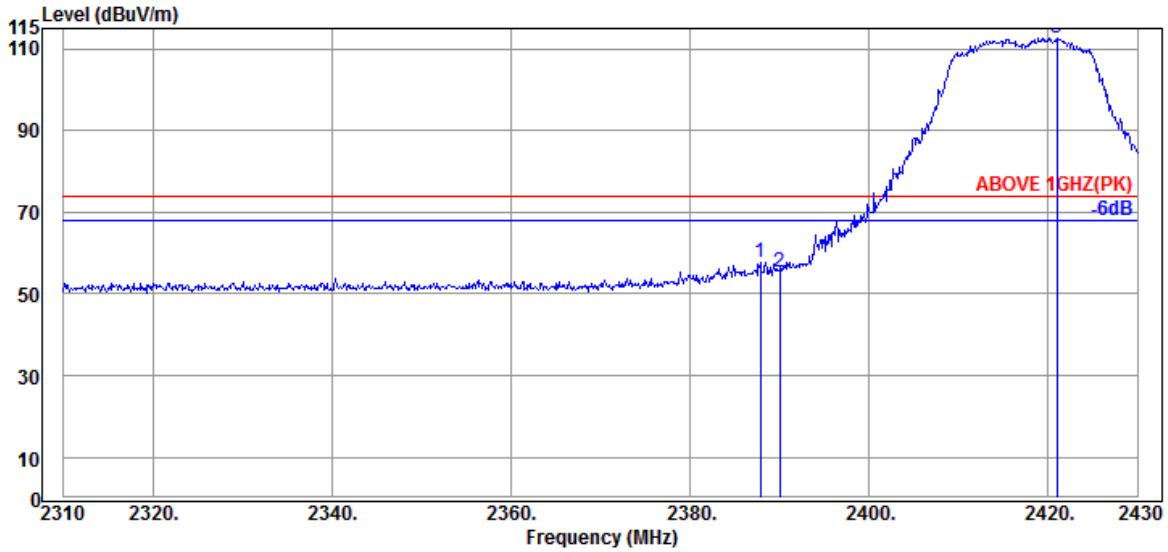

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.880	31.89	7.95	34.53	52.53	57.84	74.00	16.16	Peak
2390.040	31.89	7.95	34.54	50.08	55.38	74.00	18.62	Peak
@ 2421.000	32.01	7.96	34.54	107.29	112.72	---	---	Peak

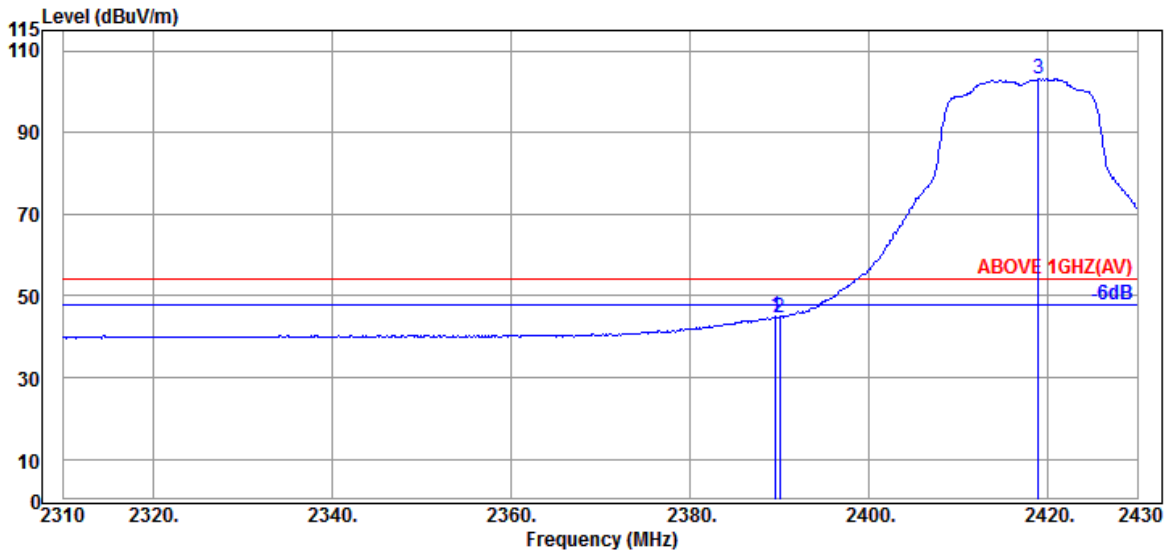


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	39.56	44.87	54.00	9.13	Average
2390.040	31.89	7.95	34.54	39.42	44.72	54.00	9.28	Average
@ 2418.960	32.01	7.96	34.54	97.63	103.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

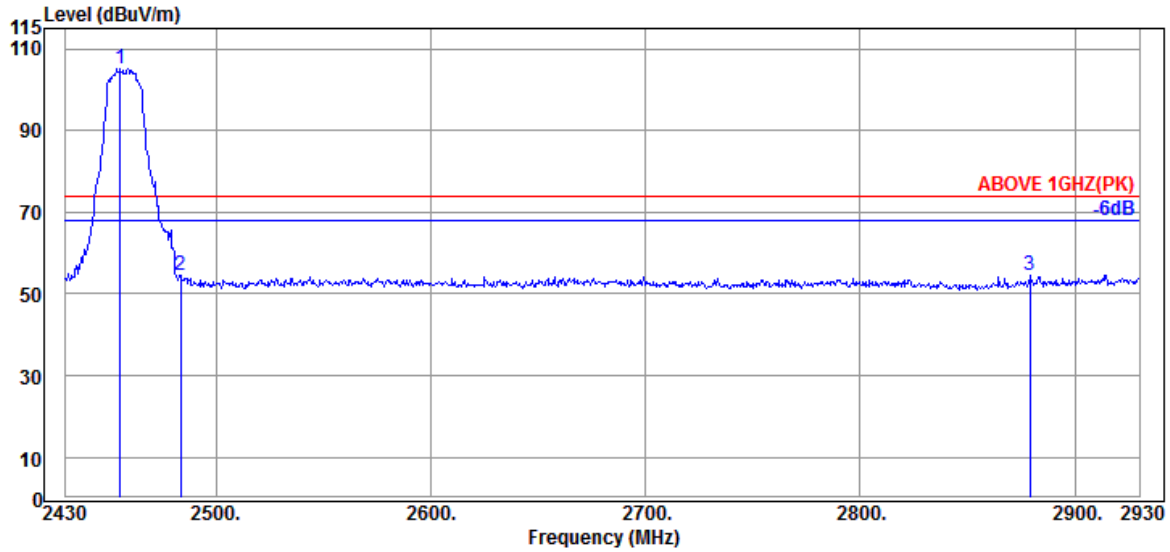

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	32.30	7.98	34.55	99.38	105.11	---	---	Peak
2483.500	32.30	7.99	34.55	48.82	54.56	74.00	19.44	Peak
2879.000	32.53	8.17	34.64	48.48	54.54	74.00	19.46	Peak

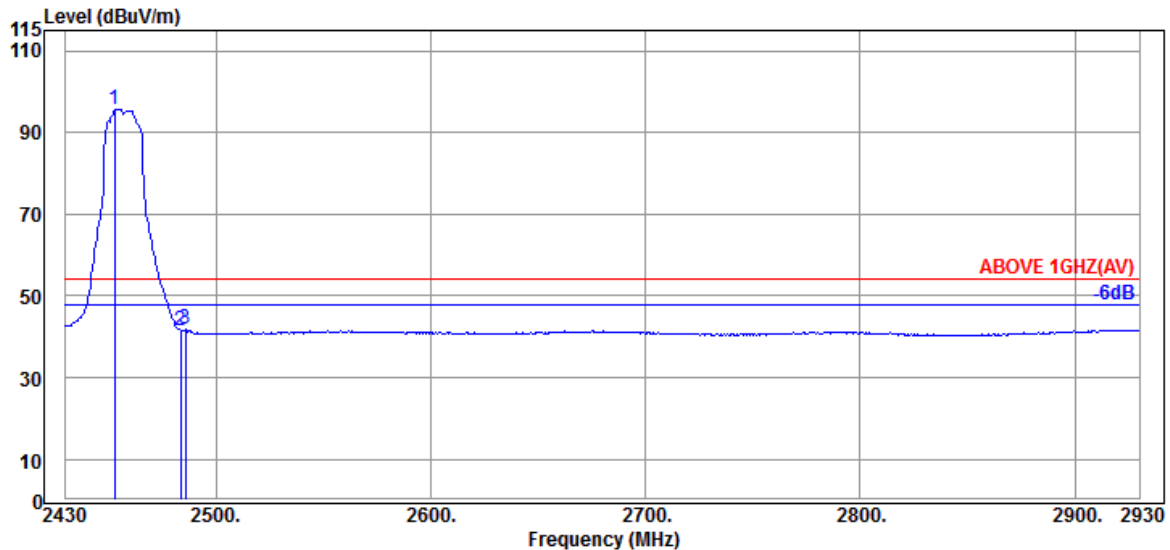


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	32.30	7.98	34.55	90.03	95.76	---	---	Average
2483.500	32.30	7.99	34.55	35.90	41.64	54.00	12.36	Average
2486.000	32.30	8.00	34.55	36.03	41.78	54.00	12.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

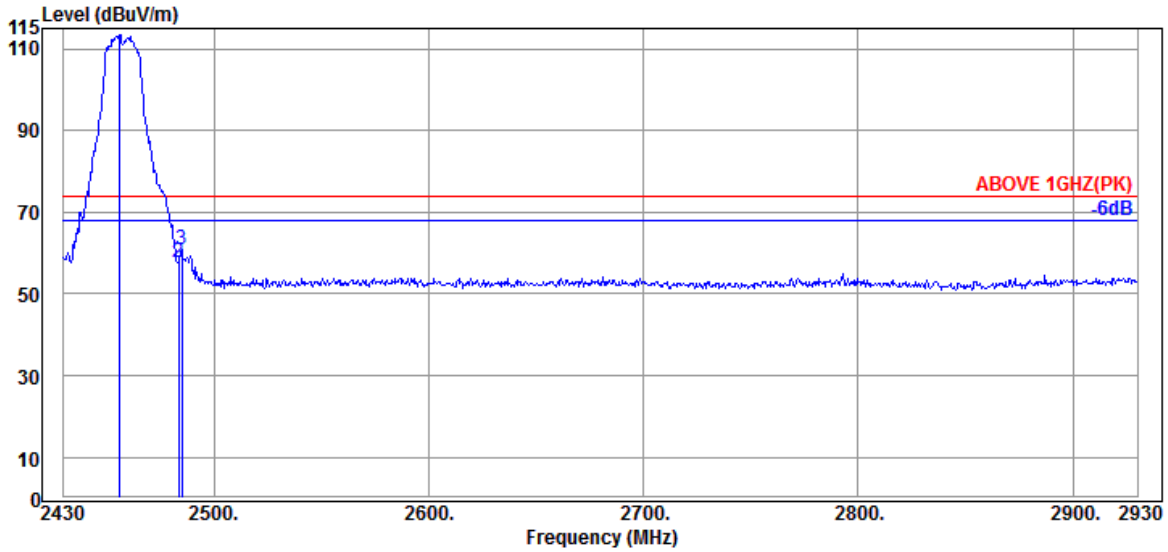

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	107.60	113.33	---	---	Peak
2483.500	32.30	7.99	34.55	52.02	57.76	74.00	16.24	Peak
2485.000	32.30	7.99	34.55	55.03	60.77	74.00	13.23	Peak

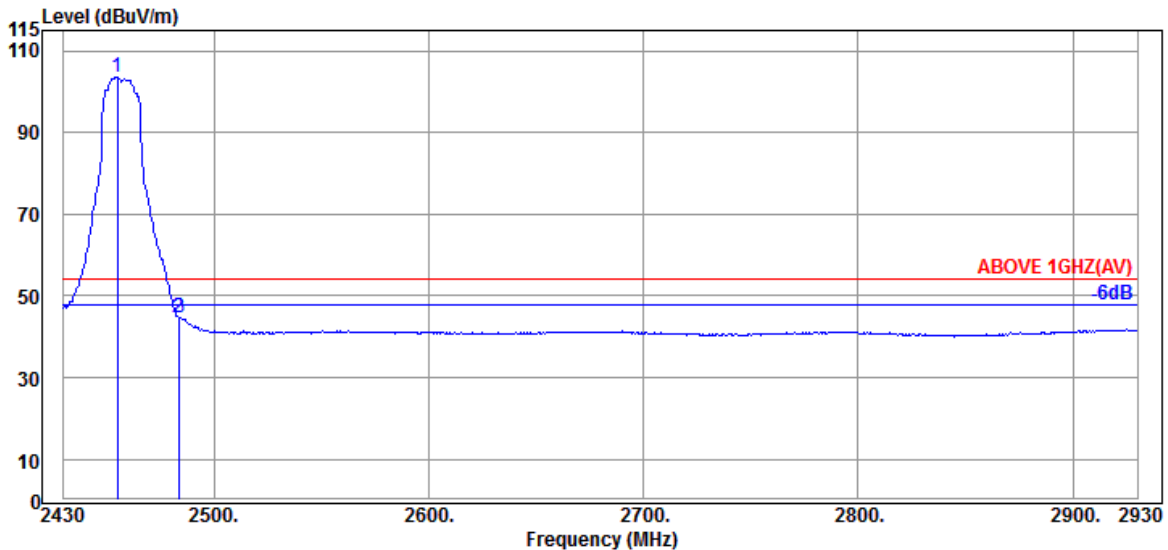


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	97.94	103.67	---	---	Average
2483.500	32.30	7.99	34.55	39.10	44.84	54.00	9.16	Average
2484.000	32.30	7.99	34.55	39.04	44.78	54.00	9.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

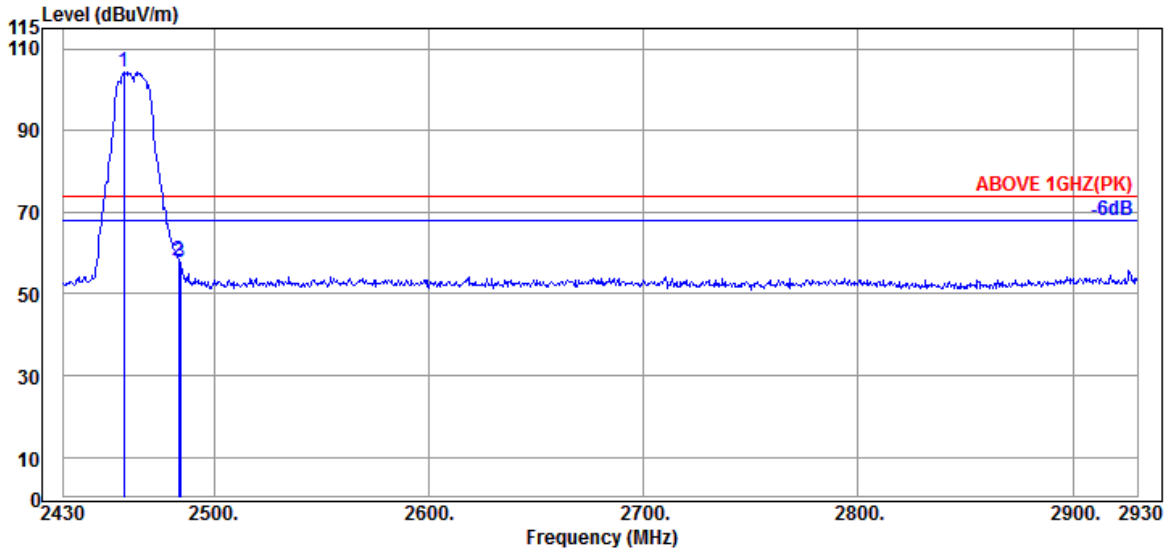

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	32.30	7.98	34.55	98.61	104.34	---	---	Peak
2483.500	32.30	7.99	34.55	52.39	58.13	74.00	15.87	Peak
2484.500	32.30	7.99	34.55	52.15	57.89	74.00	16.11	Peak

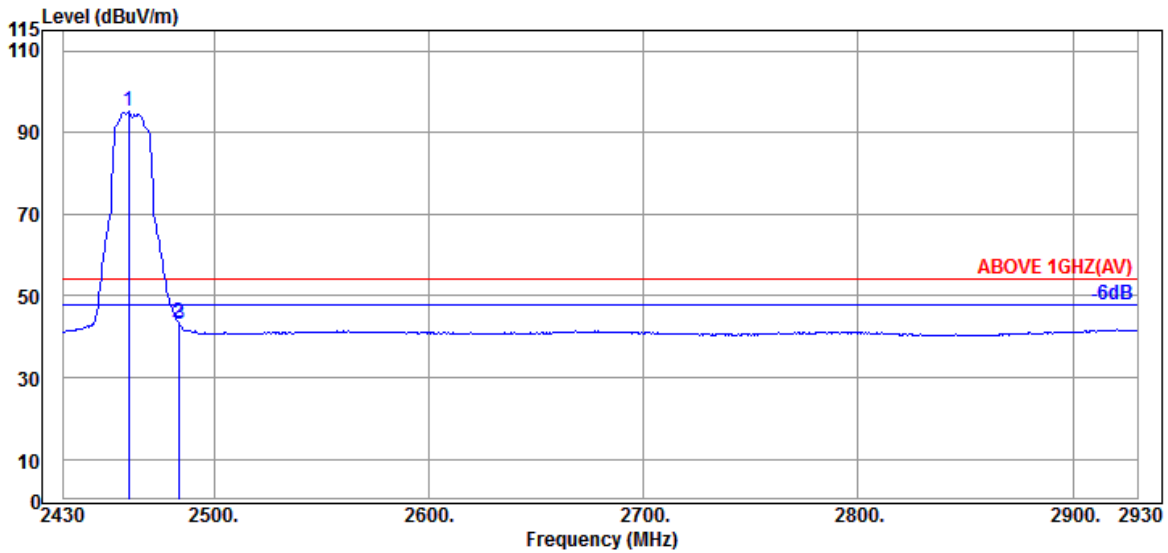


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	32.30	7.98	34.55	89.31	95.04	---	---	Average
2483.500	32.30	7.99	34.55	37.85	43.59	54.00	10.41	Average
2484.000	32.30	7.99	34.55	37.52	43.26	54.00	10.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

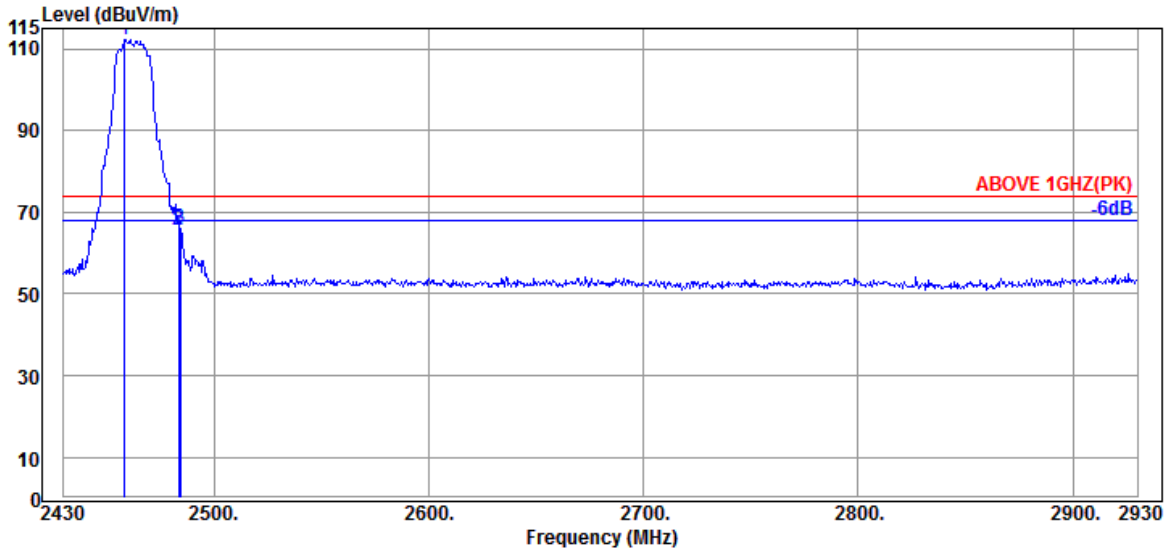

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	106.70	112.43	---	---	Peak
2483.500	32.30	7.99	34.55	59.90	65.64	74.00	8.36	Peak
2484.500	32.30	7.99	34.55	60.16	65.90	74.00	8.10	Peak

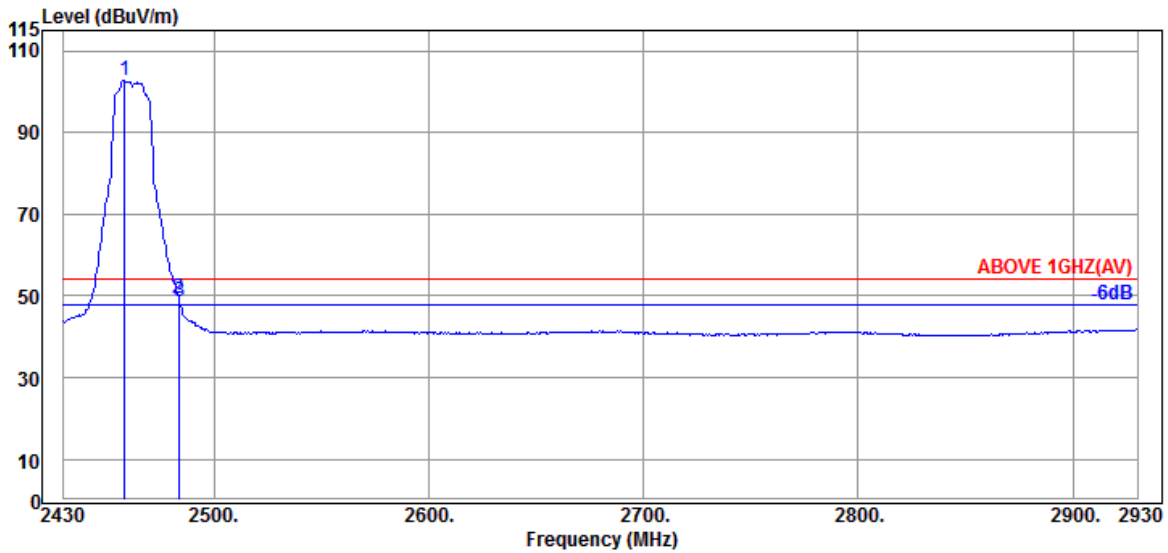


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	97.03	102.76	---	---	Average
2483.500	32.30	7.99	34.55	43.72	49.46	54.00	4.54	Average
2484.000	32.30	7.99	34.55	42.76	48.50	54.00	5.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

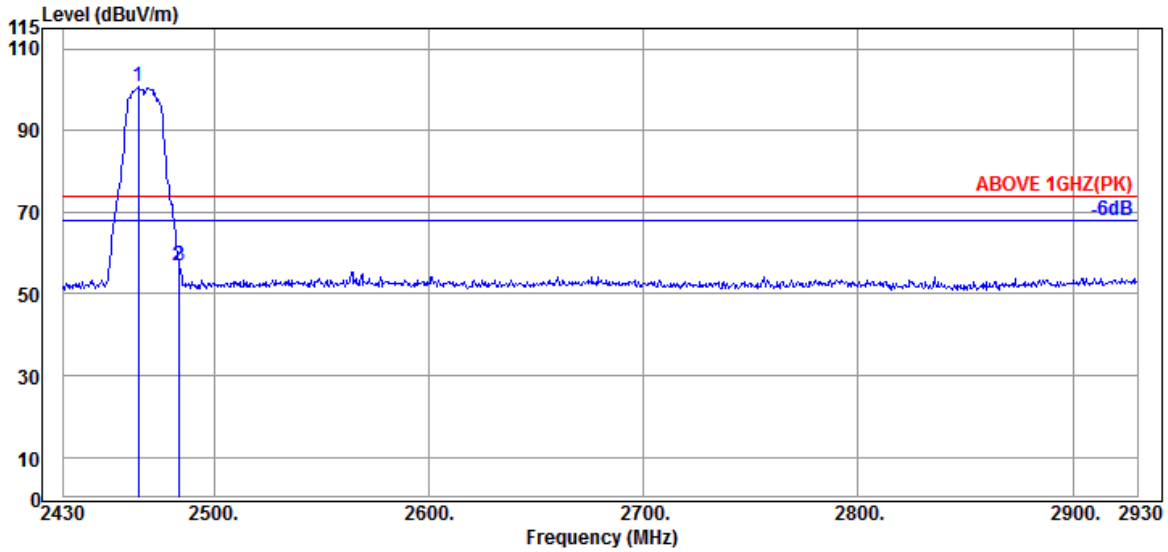

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	95.00	100.73	---	---	Peak
2483.500	32.30	7.99	34.55	51.04	56.78	74.00	17.22	Peak
2484.000	32.30	7.99	34.55	51.32	57.06	74.00	16.94	Peak

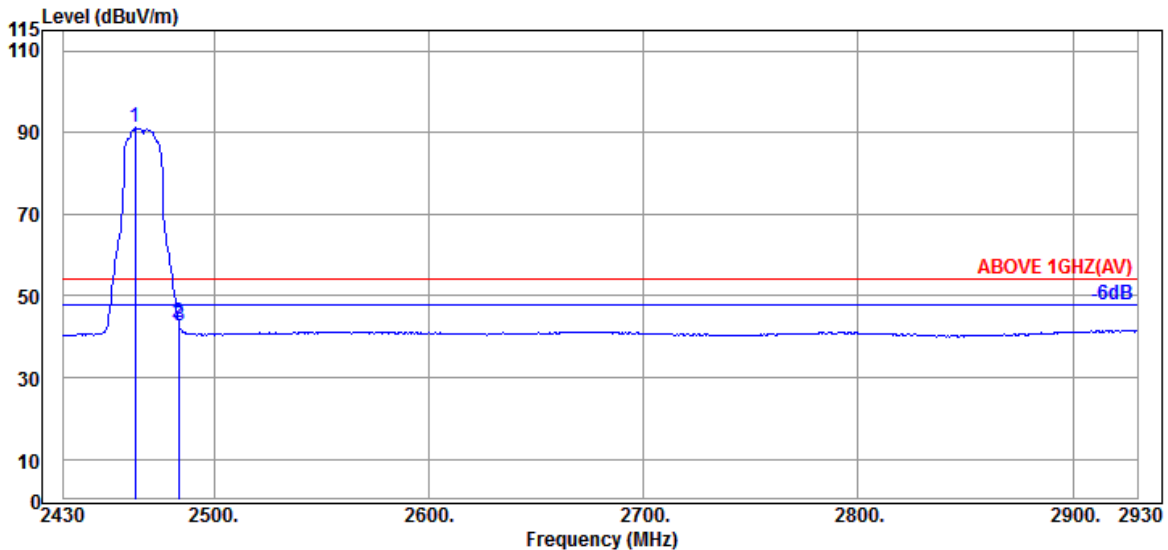


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	85.38	91.11	---	---	Average
2483.500	32.30	7.99	34.55	37.81	43.55	54.00	10.45	Average
2484.000	32.30	7.99	34.55	36.94	42.68	54.00	11.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

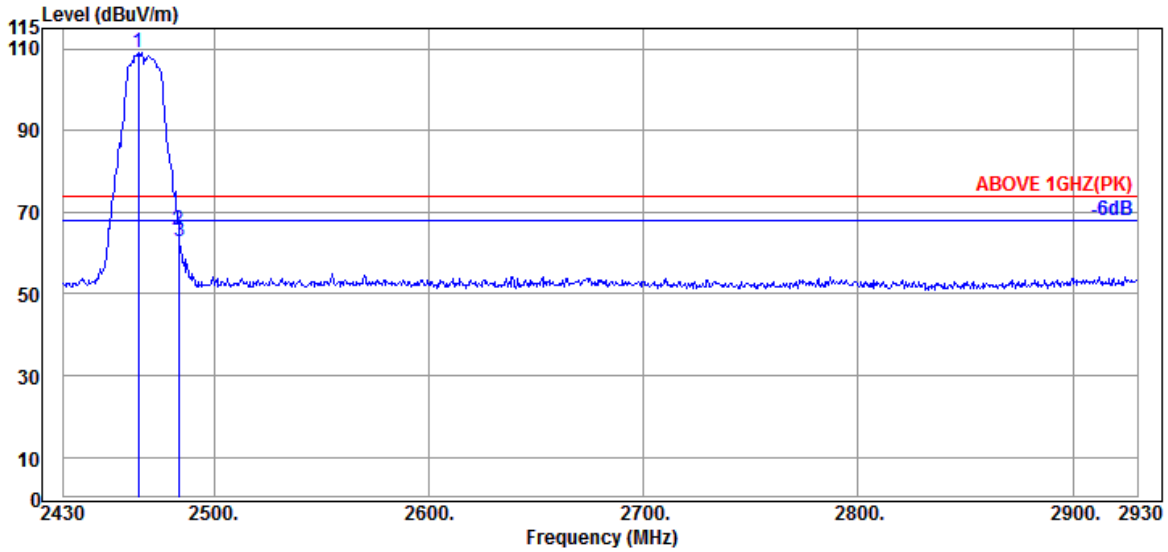

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	103.51	109.24	---	---	Peak
2483.500	32.30	7.99	34.55	59.71	65.45	74.00	8.55	Peak
2484.000	32.30	7.99	34.55	57.20	62.94	74.00	11.06	Peak

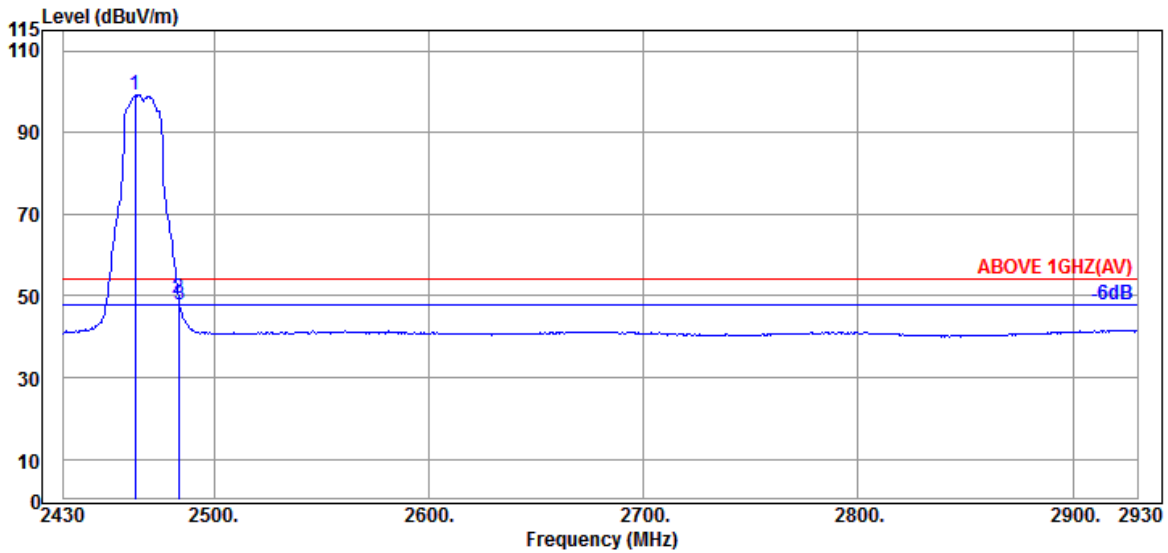


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	93.39	99.12	---	---	Average
2483.500	32.30	7.99	34.55	43.71	49.45	54.00	4.55	Average
2484.000	32.30	7.99	34.55	42.01	47.75	54.00	6.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

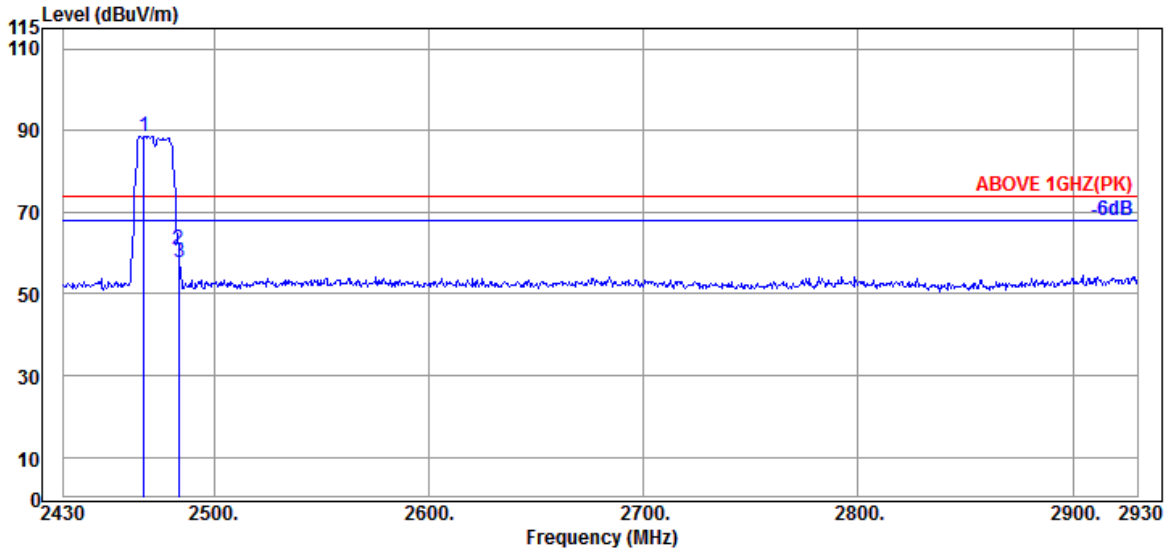

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	82.93	88.66	---	---	Peak
2483.500	32.30	7.99	34.55	55.32	61.06	74.00	12.94	Peak
2484.000	32.30	7.99	34.55	52.02	57.76	74.00	16.24	Peak

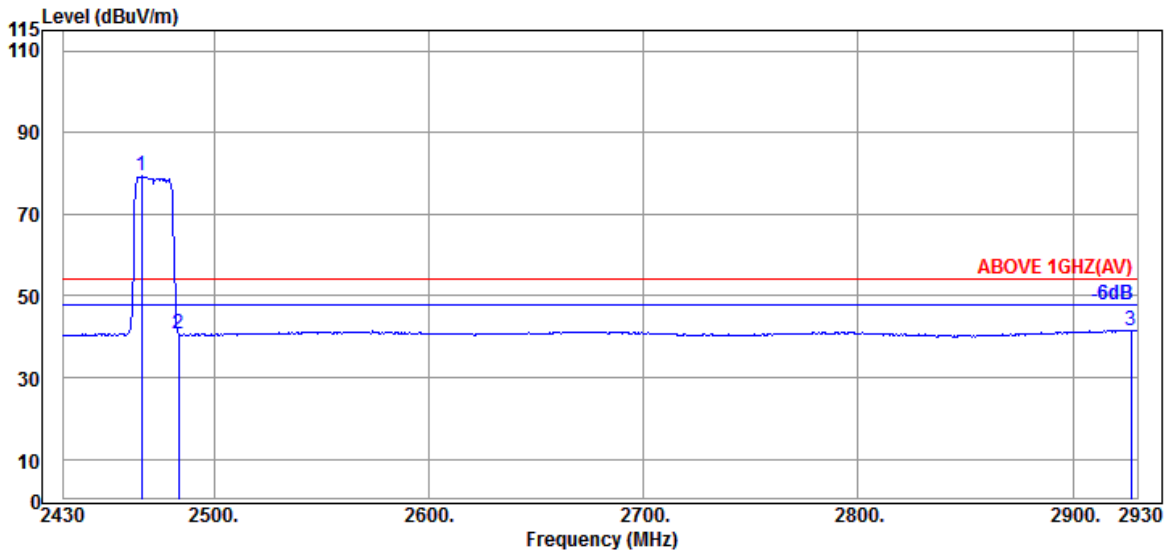


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	32.30	7.98	34.55	73.52	79.25	---	---	Average
2483.500	32.30	7.99	34.55	34.97	40.71	54.00	13.29	Average
2927.000	32.97	8.19	34.65	35.17	41.68	54.00	12.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

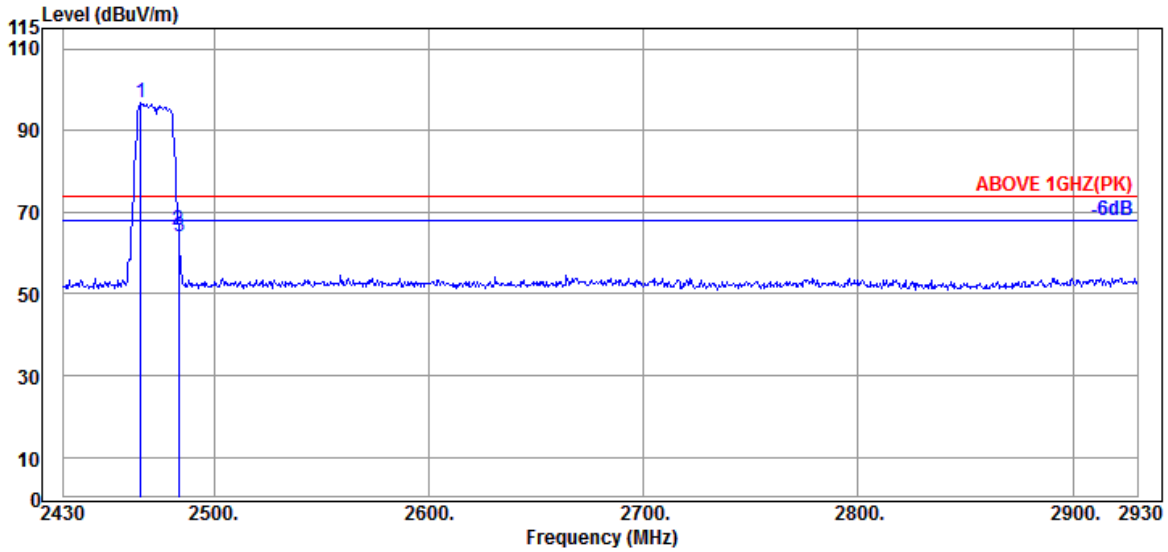

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	90.92	96.65	---	---	Peak
2483.500	32.30	7.99	34.55	59.99	65.73	74.00	8.27	Peak
2484.000	32.30	7.99	34.55	58.19	63.93	74.00	10.07	Peak

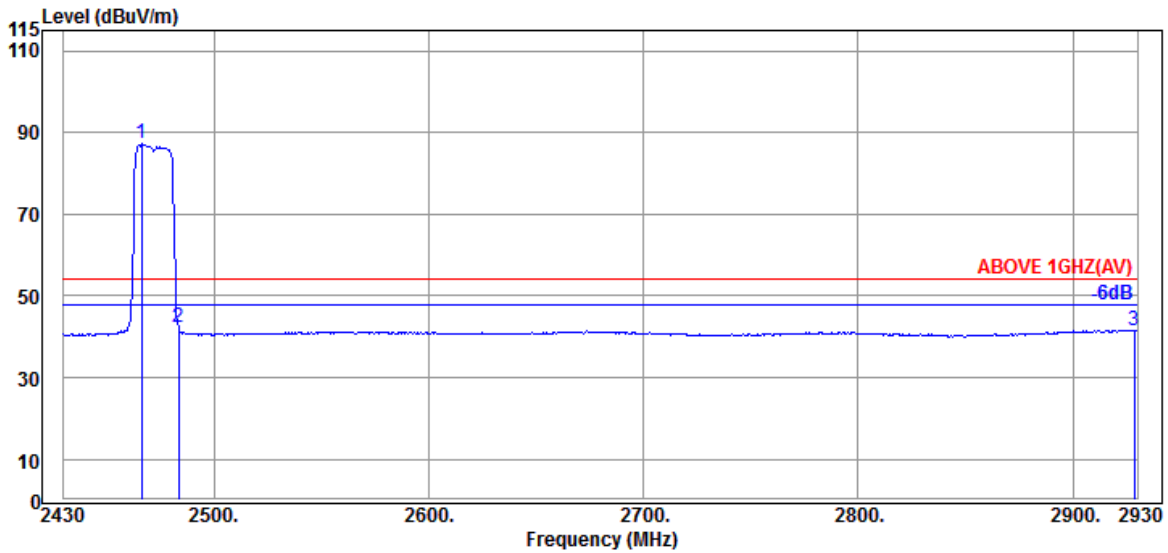


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	32.30	7.98	34.55	81.41	87.14	---	---	Average
2483.500	32.30	7.99	34.55	36.48	42.22	54.00	11.78	Average
2928.500	32.97	8.19	34.65	35.17	41.68	54.00	12.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

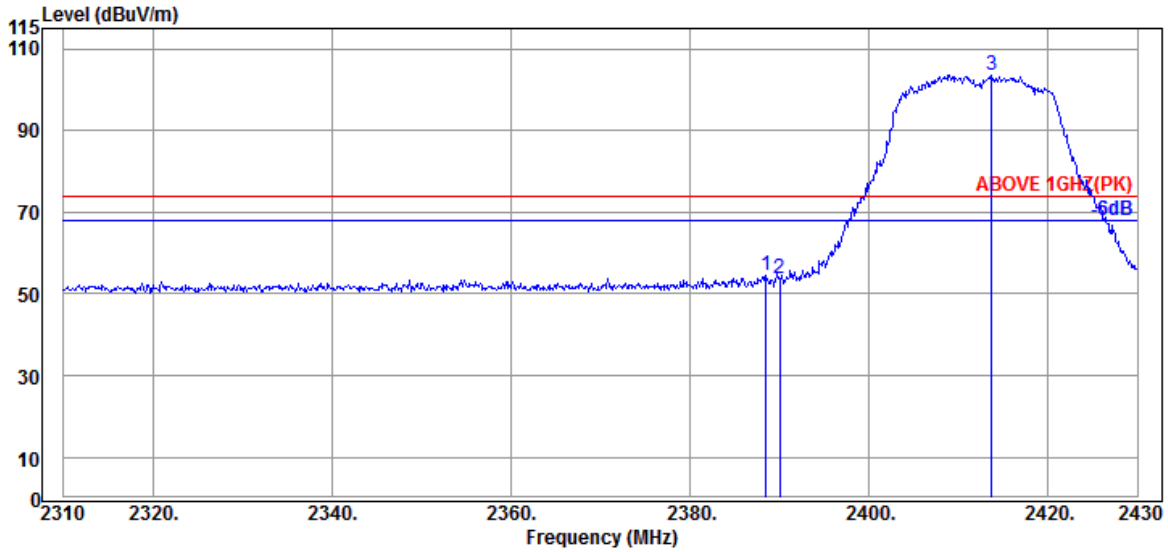

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.480	31.89	7.95	34.53	49.06	54.37	74.00	19.63	Peak
2390.040	31.89	7.95	34.54	48.52	53.82	74.00	20.18	Peak
@ 2413.680	31.94	7.96	34.54	98.21	103.57	---	---	Peak

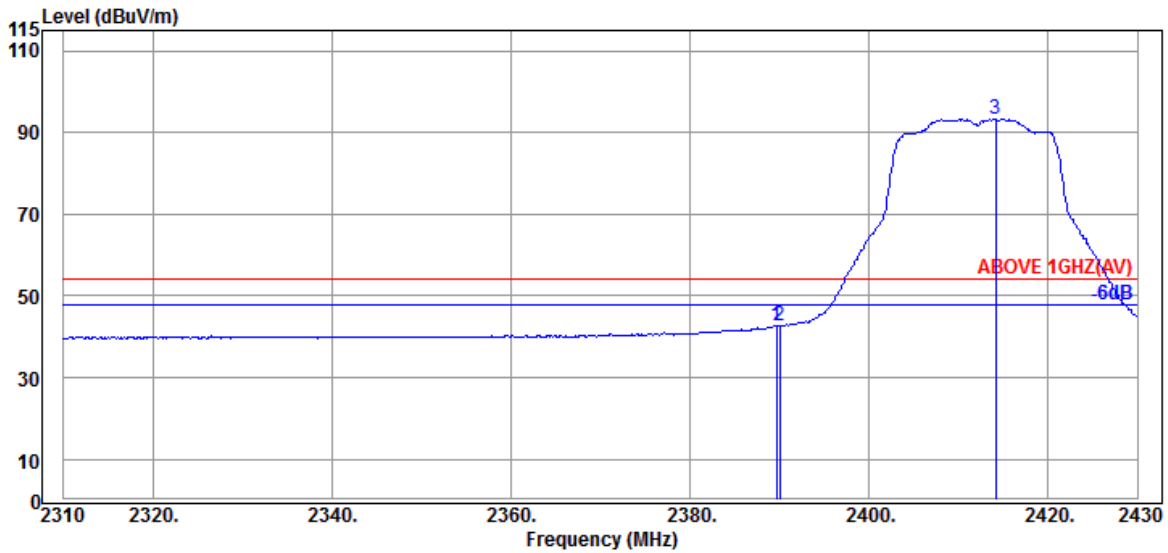


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.36	42.67	54.00	11.33	Average
2390.040	31.89	7.95	34.54	37.53	42.83	54.00	11.17	Average
@ 2414.160	31.94	7.96	34.54	87.94	93.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

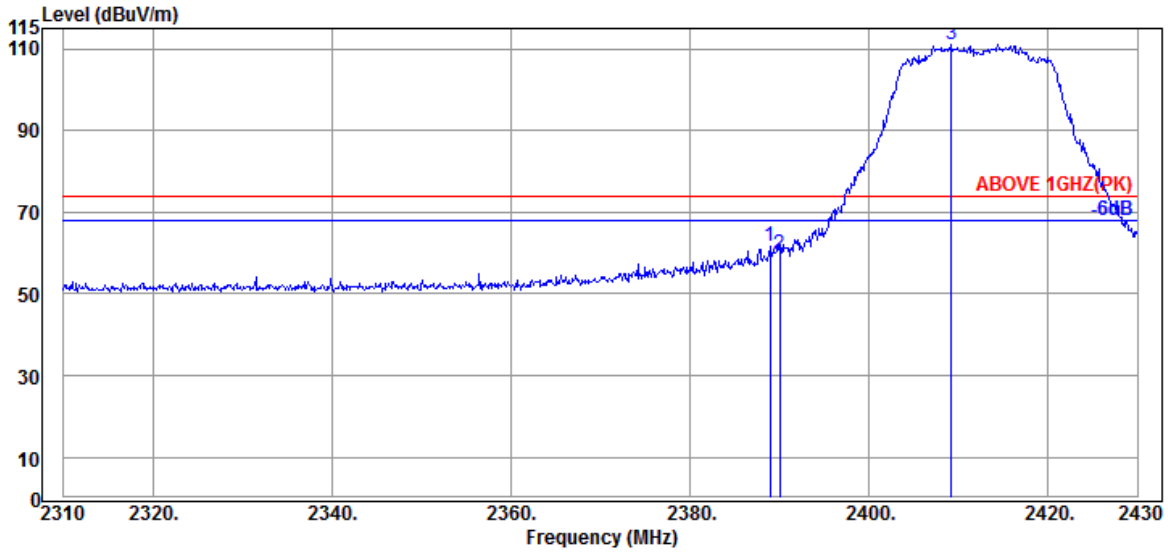

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	31.89	7.95	34.53	56.44	61.75	74.00	12.25	Peak
2390.040	31.89	7.95	34.54	54.43	59.73	74.00	14.27	Peak
@ 2409.240	31.87	7.96	34.54	105.77	111.06	---	---	Peak

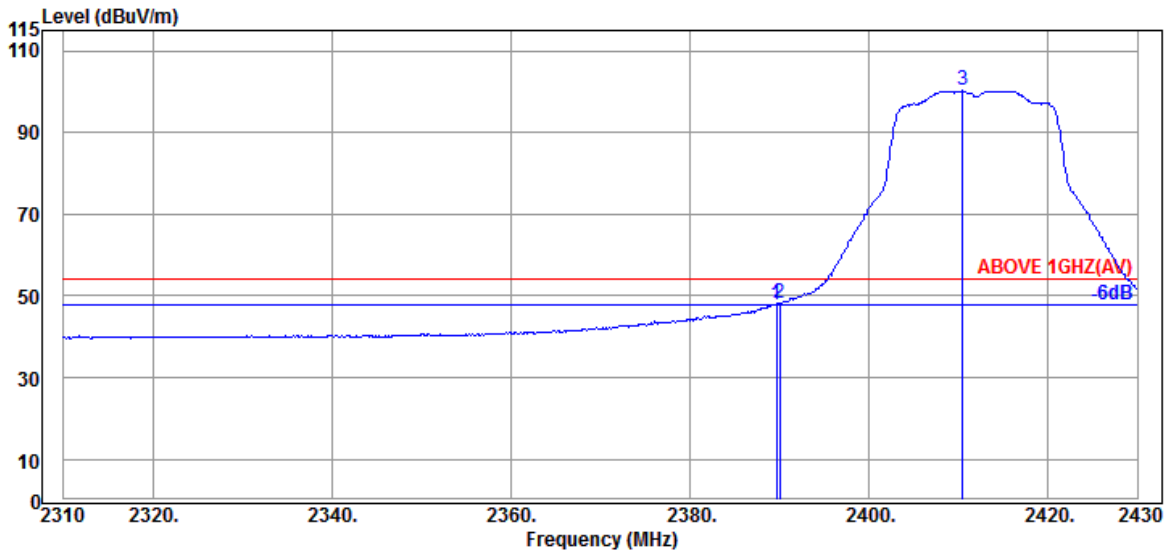


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	42.68	47.99	54.00	6.01	Average
2390.040	31.89	7.95	34.54	42.82	48.12	54.00	5.88	Average
@ 2410.440	31.87	7.96	34.54	94.93	100.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

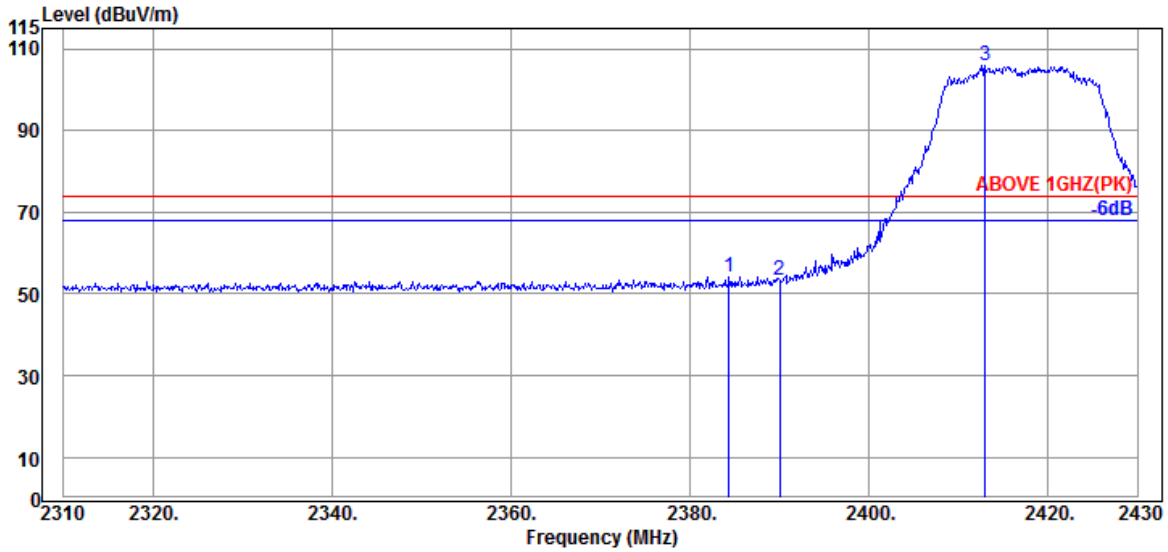

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.400	31.89	7.95	34.53	48.88	54.19	74.00	19.81	Peak
2390.040	31.89	7.95	34.54	48.17	53.47	74.00	20.53	Peak
@ 2412.960	31.94	7.96	34.54	100.65	106.01	---	---	Peak

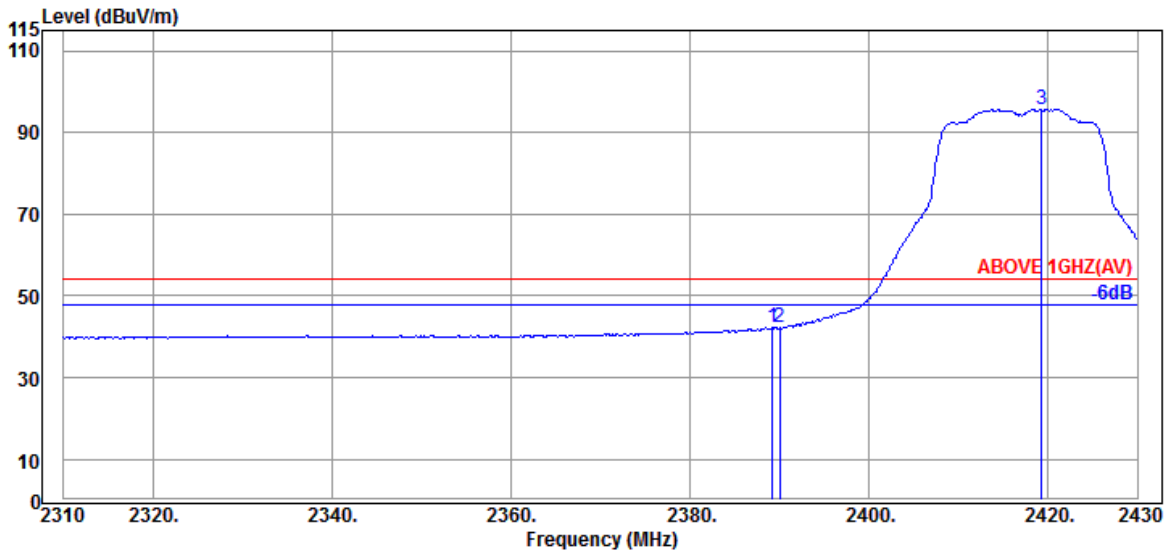


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	36.96	42.27	54.00	11.73	Average
2390.040	31.89	7.95	34.54	36.82	42.12	54.00	11.88	Average
@ 2419.320	32.01	7.96	34.54	90.33	95.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

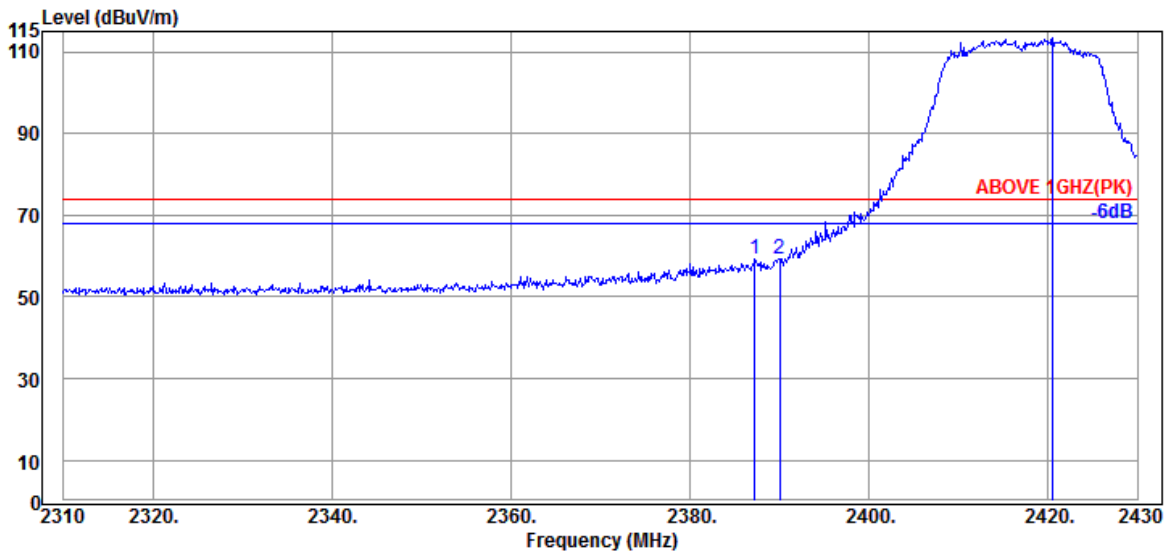

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.280	31.89	7.95	34.53	53.87	59.18	74.00	14.82	Peak
2390.040	31.89	7.95	34.54	54.02	59.32	74.00	14.68	Peak
@ 2420.520	32.01	7.96	34.54	108.11	113.54	---	---	Peak

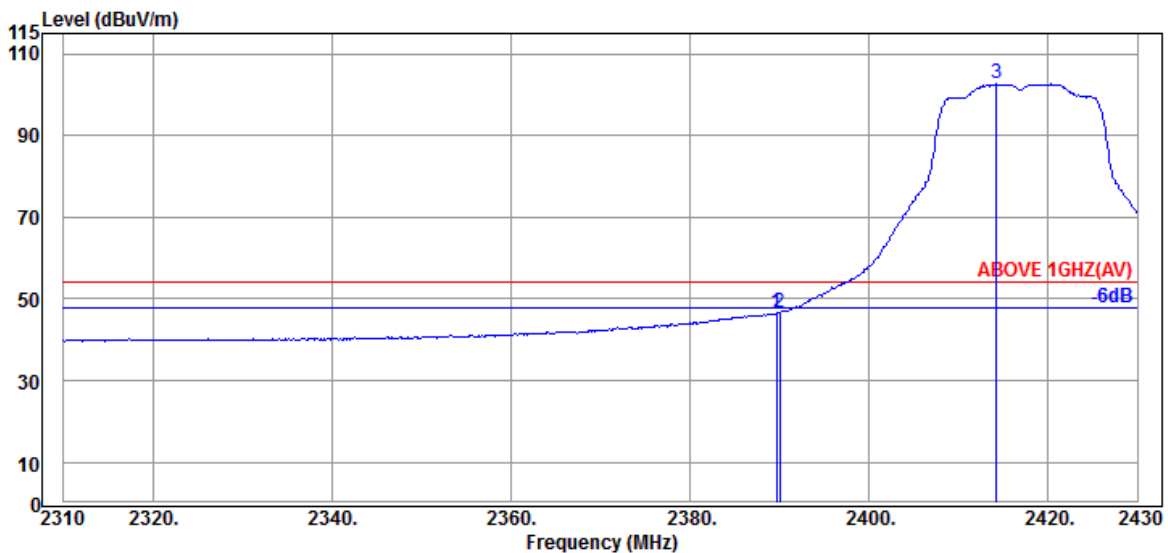


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	41.21	46.52	54.00	7.48	Average
2390.040	31.89	7.95	34.54	41.28	46.58	54.00	7.42	Average
@ 2414.280	31.94	7.96	34.54	97.34	102.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

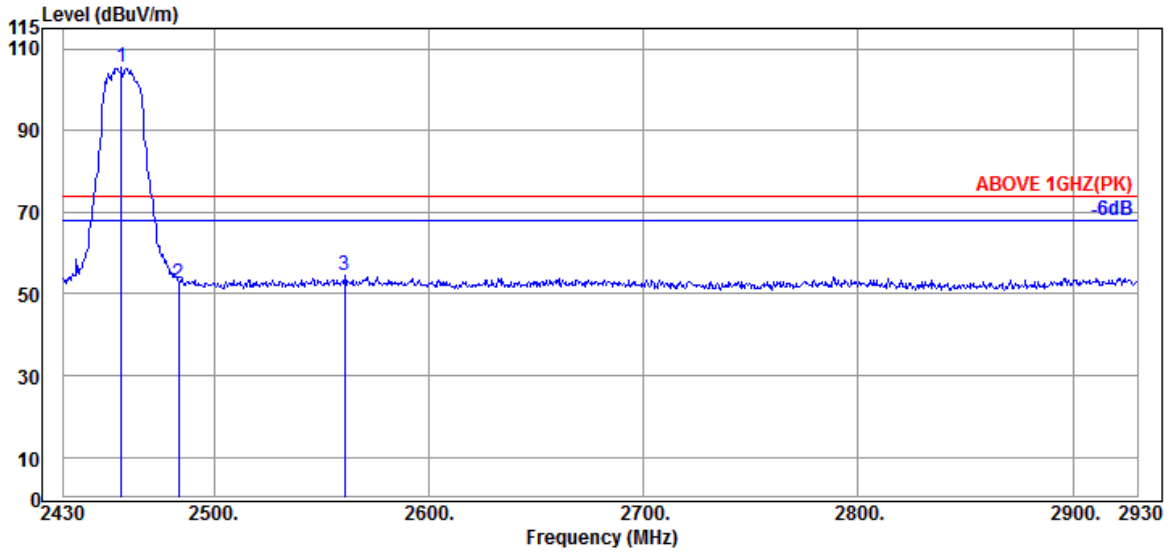

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.000	32.30	7.98	34.55	99.89	105.62	---	---	Peak
2483.500	32.30	7.99	34.55	46.87	52.61	74.00	21.39	Peak
2561.000	32.50	8.03	34.57	48.67	54.63	74.00	19.37	Peak

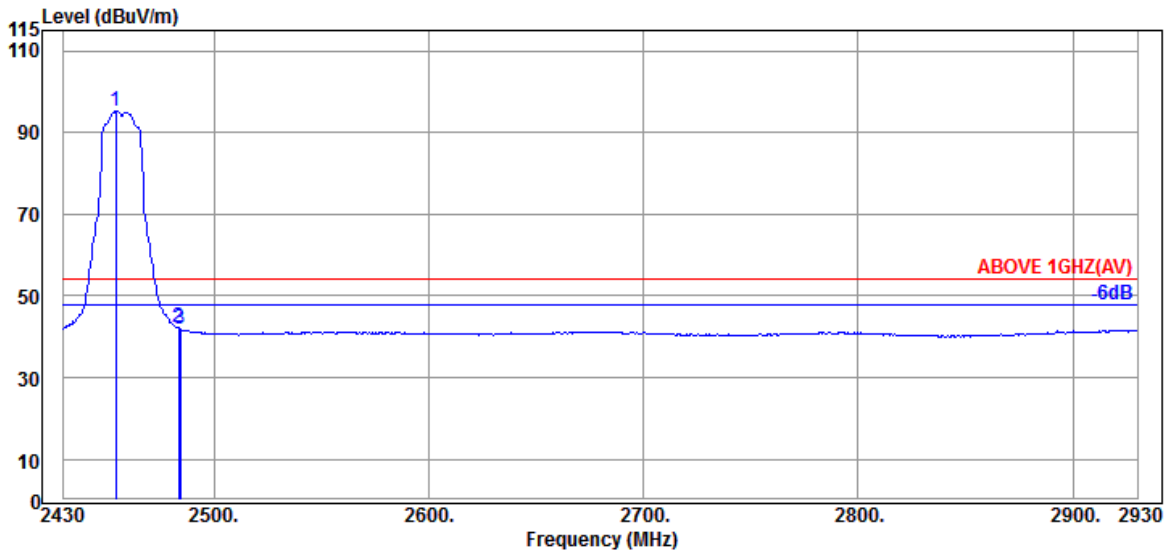


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	89.62	95.35	---	---	Average
2483.500	32.30	7.99	34.55	36.37	42.11	54.00	11.89	Average
2484.500	32.30	7.99	34.55	36.26	42.00	54.00	12.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

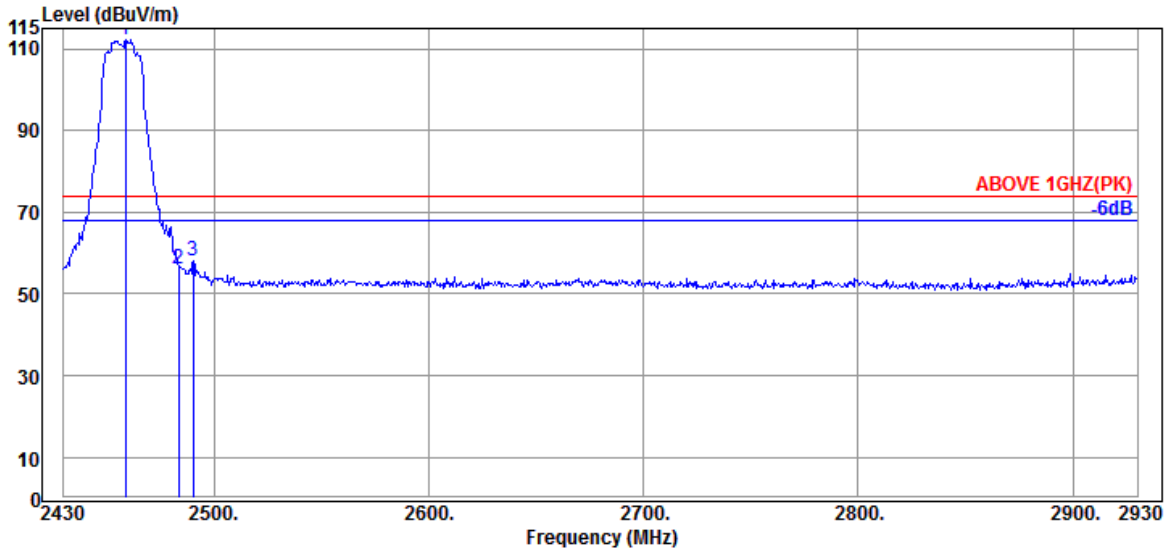

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	106.36	112.09	---	---	Peak
2483.500	32.30	7.99	34.55	50.54	56.28	74.00	17.72	Peak
2490.500	32.30	8.00	34.55	52.26	58.01	74.00	15.99	Peak

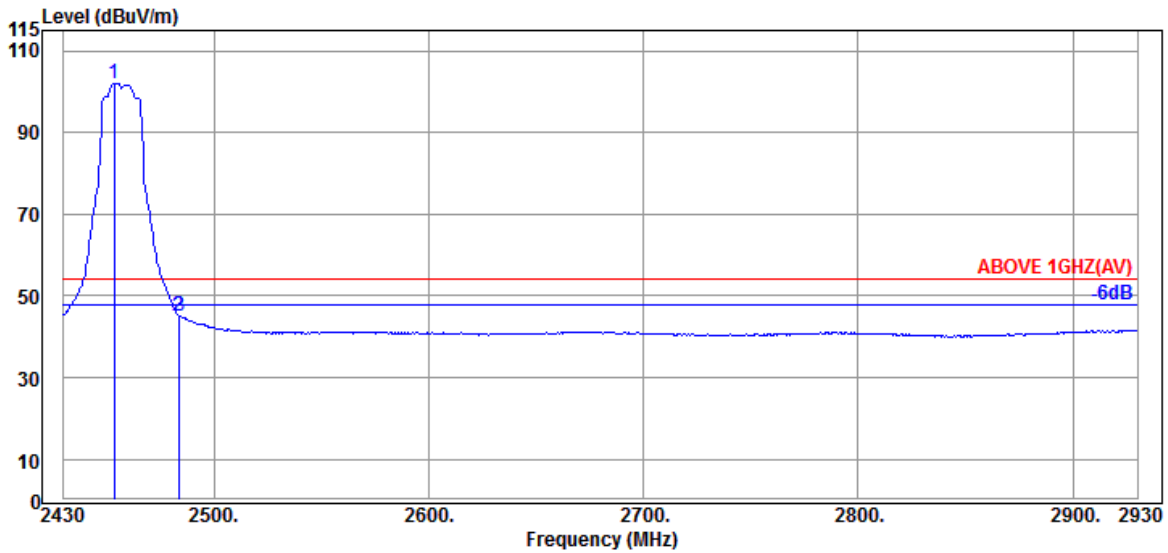


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	32.30	7.98	34.55	96.34	102.07	---	---	Average
2483.500	32.30	7.99	34.55	39.48	45.22	54.00	8.78	Average
2484.000	32.30	7.99	34.55	39.25	44.99	54.00	9.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

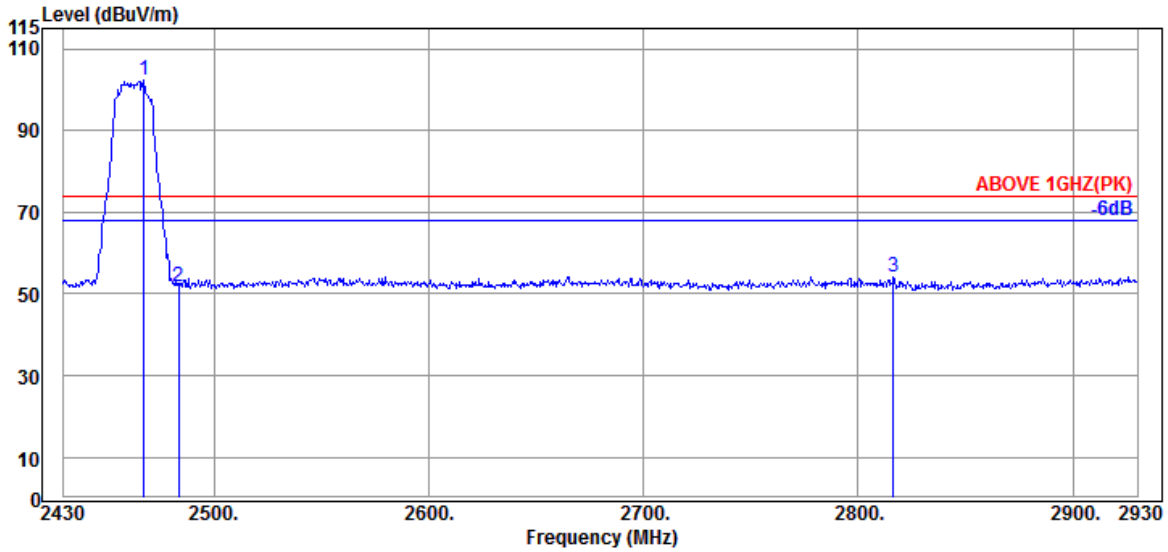

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	96.62	102.35	---	---	Peak
2483.500	32.30	7.99	34.55	46.09	51.83	74.00	22.17	Peak
2816.500	32.33	8.14	34.62	48.48	54.33	74.00	19.67	Peak

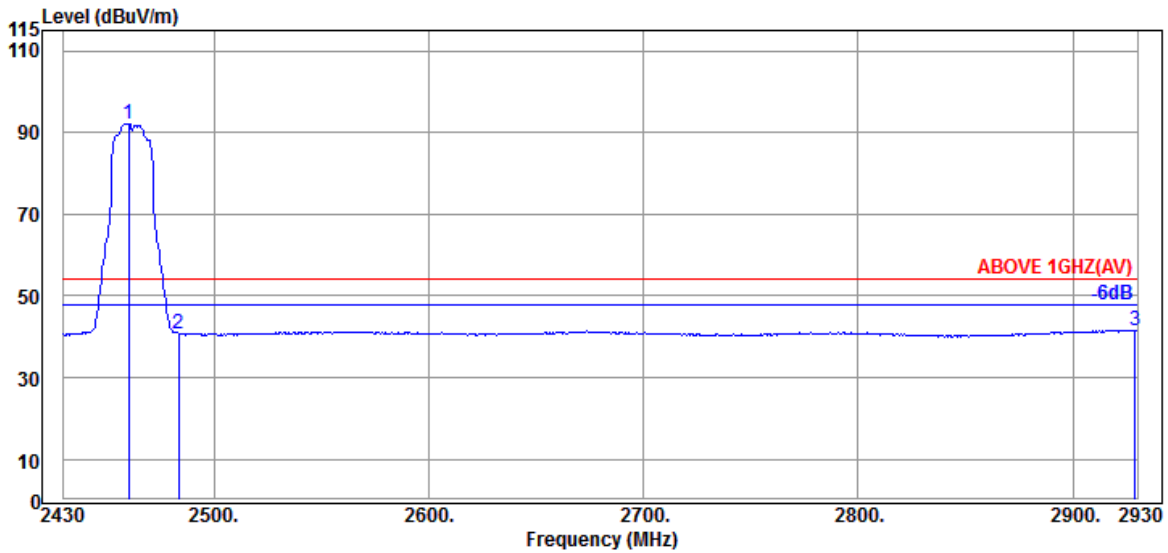


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	32.30	7.98	34.55	86.50	92.23	---	---	Average
2483.500	32.30	7.99	34.55	35.10	40.84	54.00	13.16	Average
2929.000	32.97	8.19	34.65	35.07	41.58	54.00	12.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

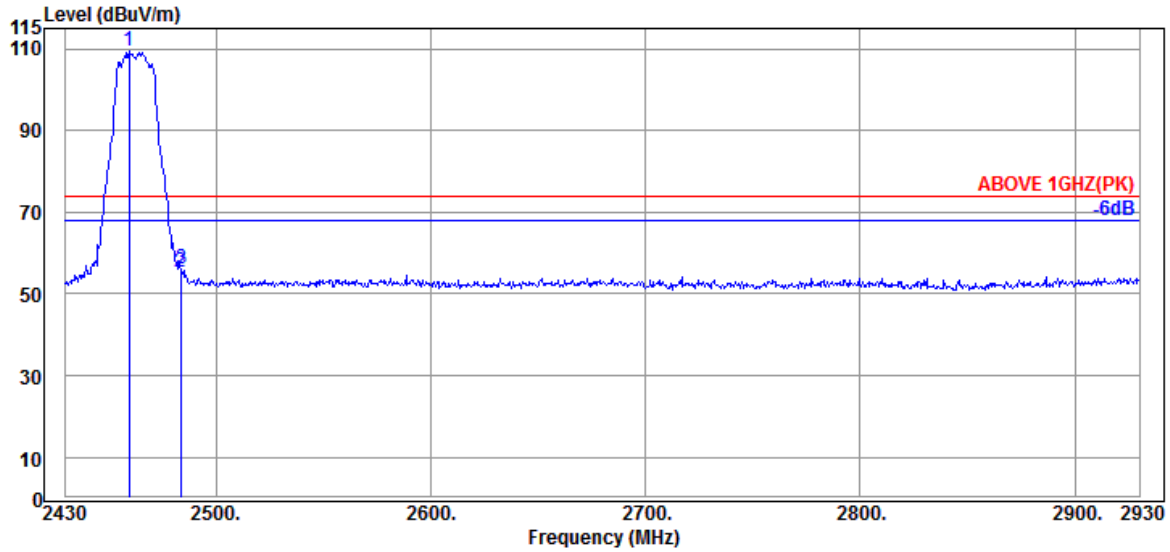

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.30	7.98	34.55	103.55	109.28	---	---	Peak
2483.500	32.30	7.99	34.55	49.78	55.52	74.00	18.48	Peak
2484.000	32.30	7.99	34.55	50.18	55.92	74.00	18.08	Peak

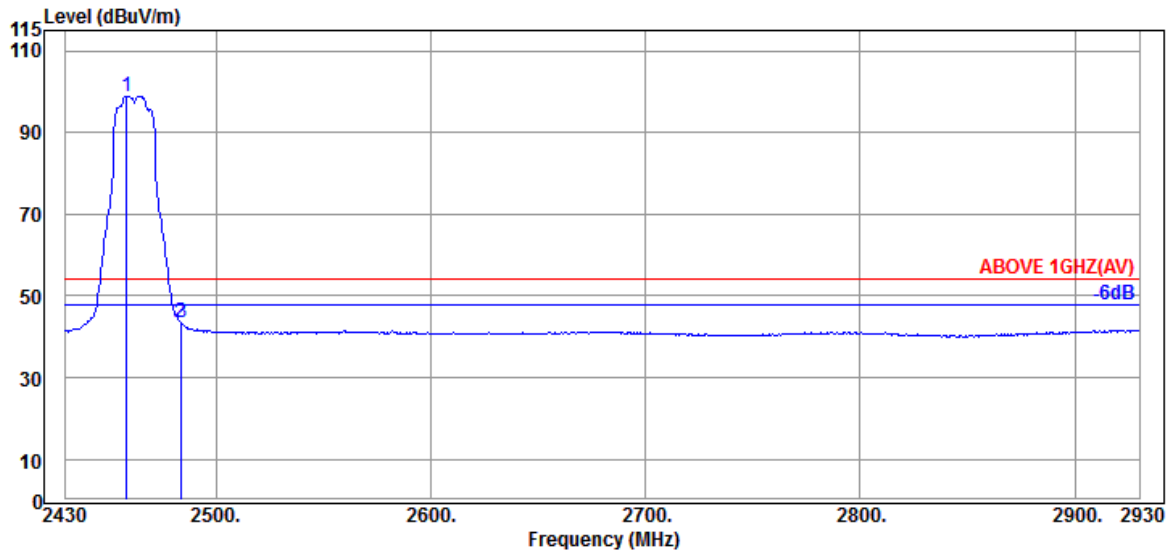


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	93.17	98.90	---	---	Average
2483.500	32.30	7.99	34.55	37.83	43.57	54.00	10.43	Average
2484.000	32.30	7.99	34.55	37.65	43.39	54.00	10.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

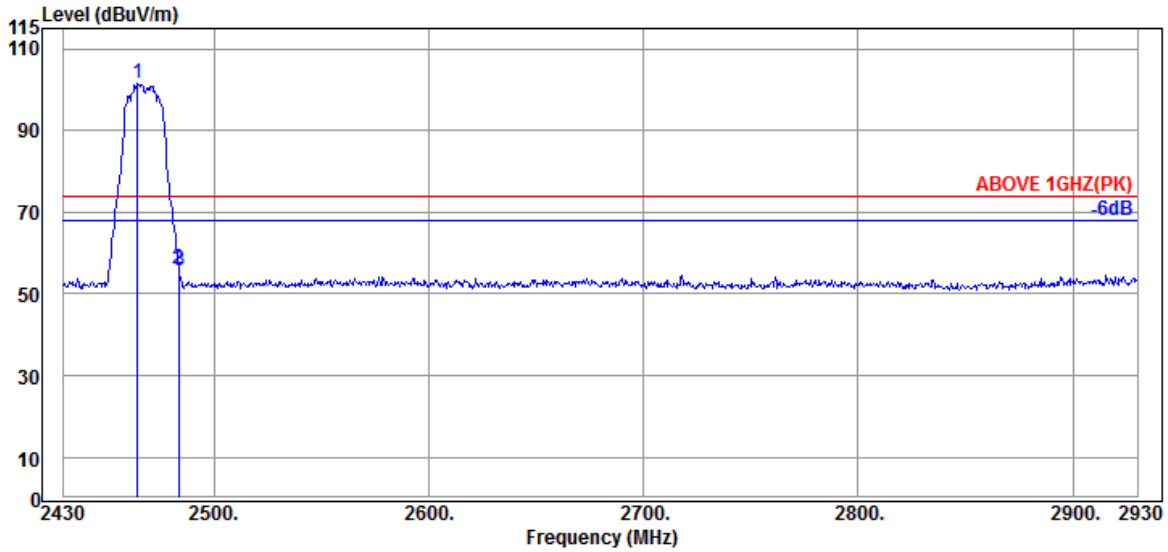

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	95.93	101.66	---	---	Peak
2483.500	32.30	7.99	34.55	50.38	56.12	74.00	17.88	Peak
2484.000	32.30	7.99	34.55	49.97	55.71	74.00	18.29	Peak

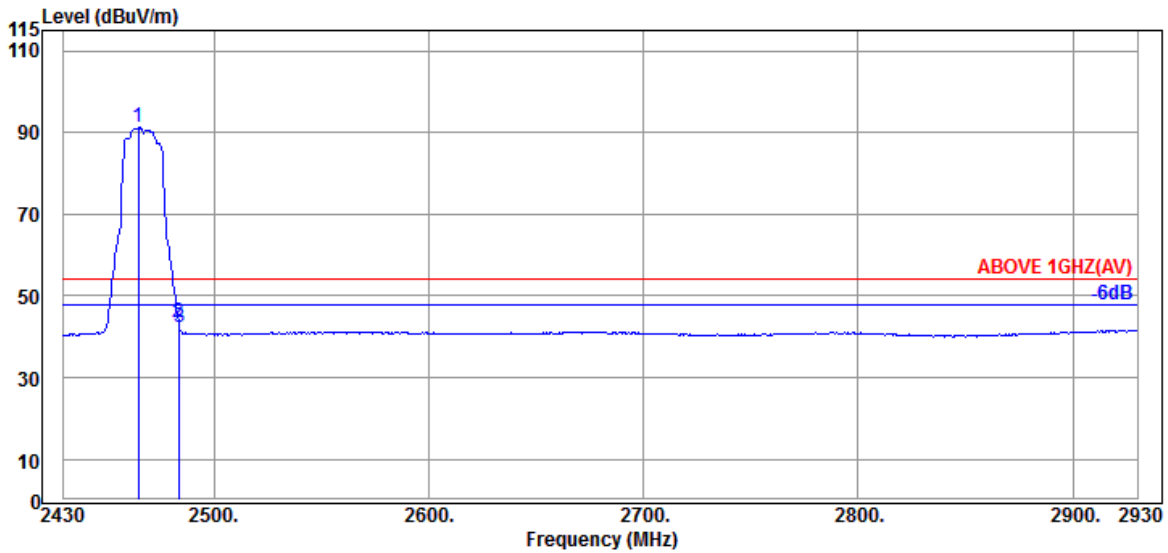


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	85.39	91.12	---	---	Average
2483.500	32.30	7.99	34.55	37.82	43.56	54.00	10.44	Average
2484.000	32.30	7.99	34.55	36.46	42.20	54.00	11.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

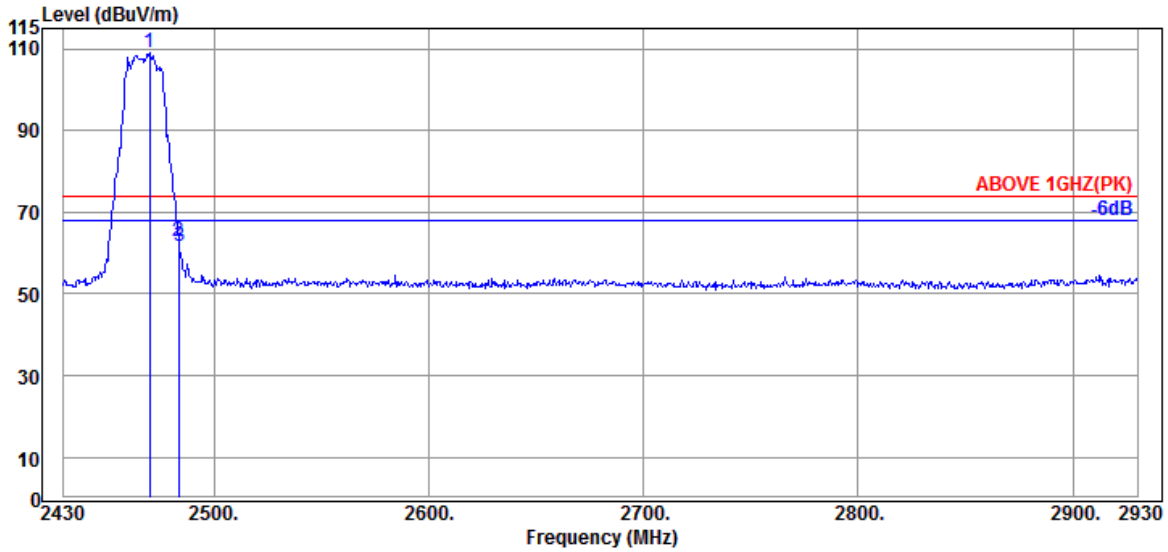

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	32.30	7.99	34.55	103.47	109.21	---	---	Peak
2483.500	32.30	7.99	34.55	57.03	62.77	74.00	11.23	Peak
2484.000	32.30	7.99	34.55	55.90	61.64	74.00	12.36	Peak

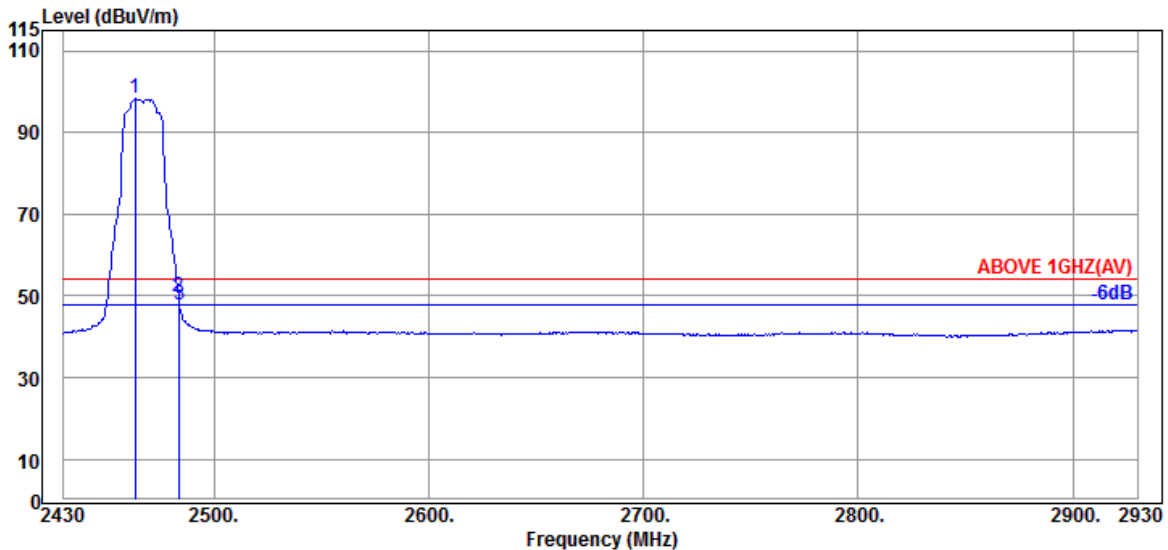


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	92.48	98.21	---	---	Average
2483.500	32.30	7.99	34.55	44.20	49.94	54.00	4.06	Average
2484.000	32.30	7.99	34.55	42.08	47.82	54.00	6.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

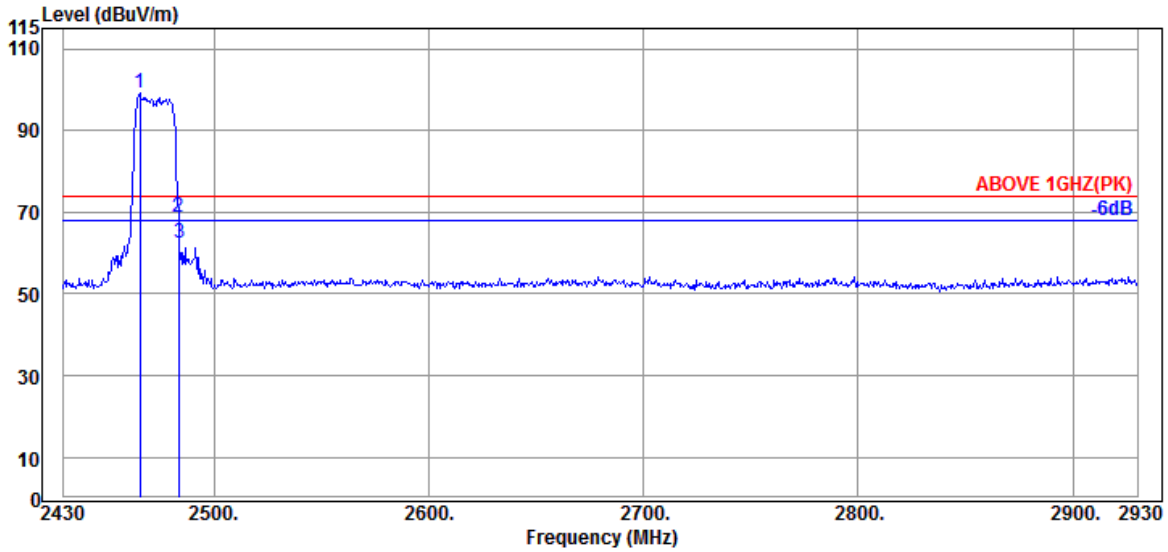

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	93.43	99.16	---	---	Peak
2483.500	32.30	7.99	34.55	62.97	68.71	74.00	5.29	Peak
2484.000	32.30	7.99	34.55	56.63	62.37	74.00	11.63	Peak

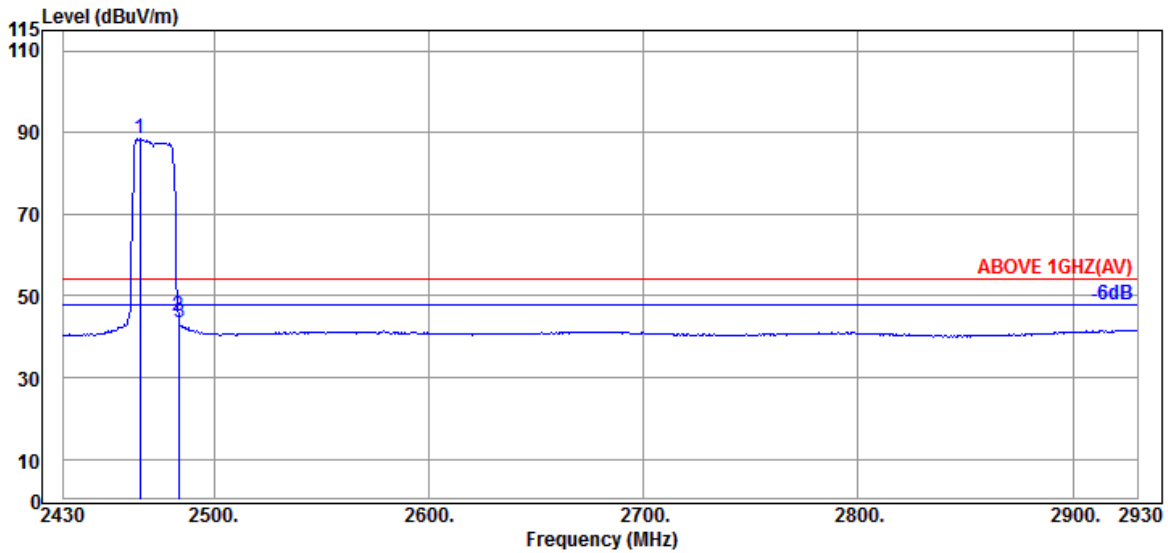


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	82.70	88.43	---	---	Average
2483.500	32.30	7.99	34.55	39.44	45.18	54.00	8.82	Average
2484.000	32.30	7.99	34.55	37.60	43.34	54.00	10.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

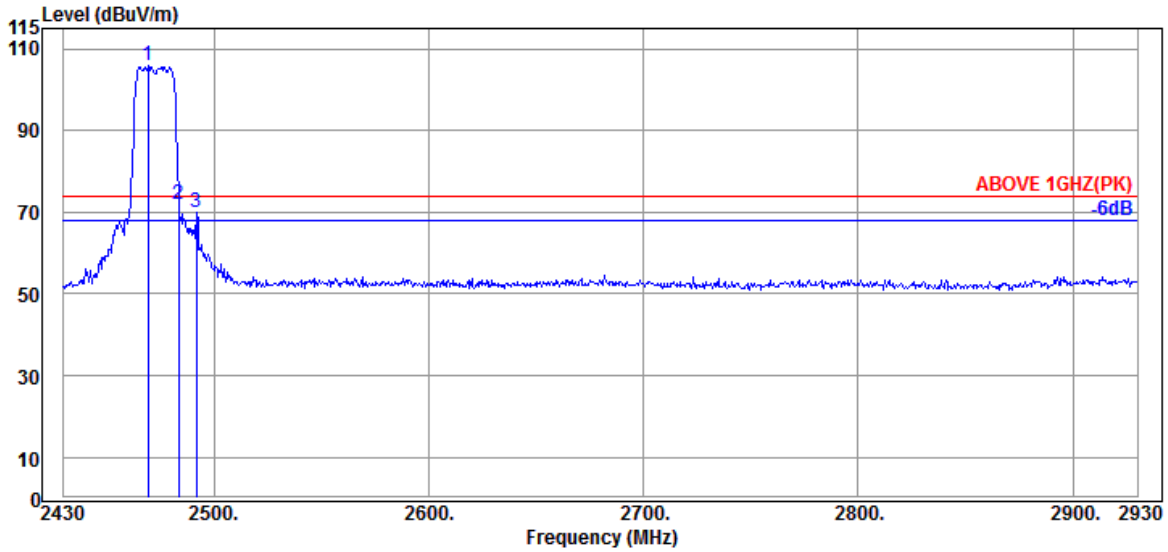

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	32.30	7.98	34.55	100.29	106.02	---	---	Peak
2483.500	32.30	7.99	34.55	66.35	72.09	74.00	1.91	Peak
2492.000	32.30	8.00	34.56	64.26	70.00	74.00	4.00	Peak

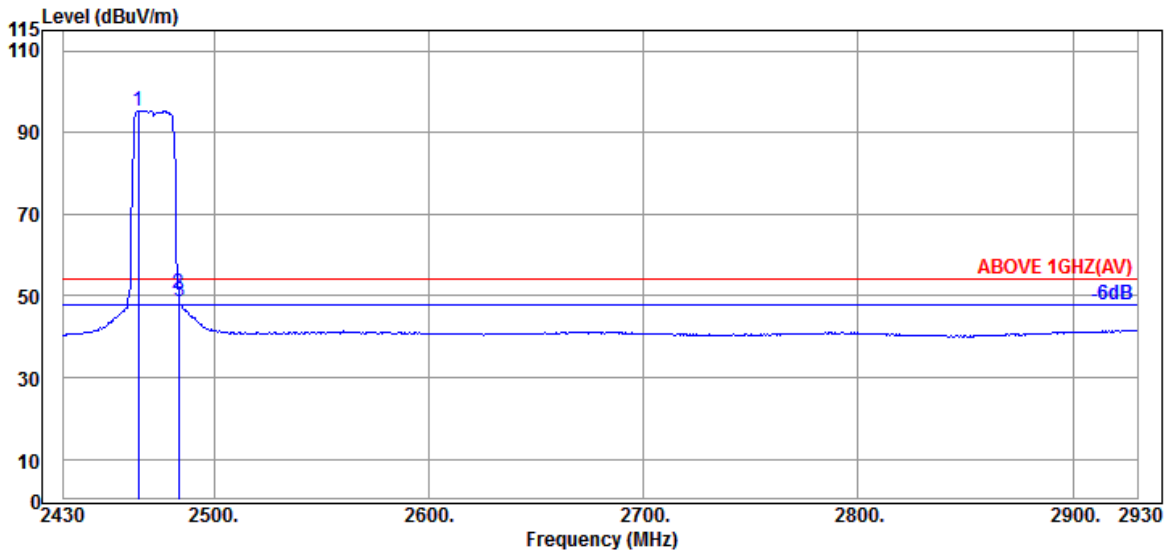


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	89.65	95.38	---	---	Average
2483.500	32.30	7.99	34.55	44.89	50.63	54.00	3.37	Average
2484.000	32.30	7.99	34.55	42.75	48.49	54.00	5.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

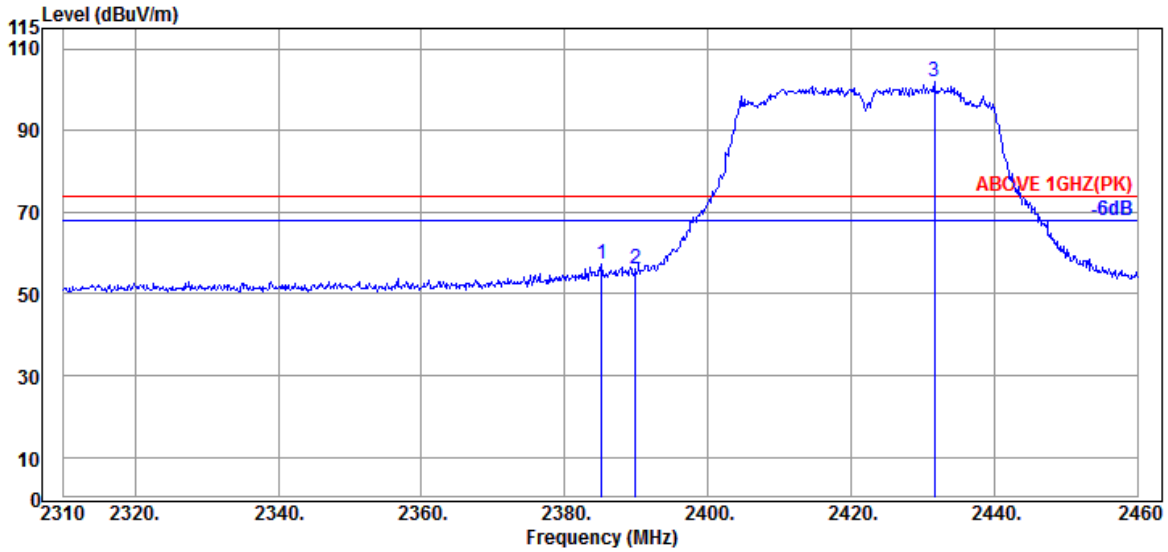

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.150	31.89	7.95	34.53	52.09	57.40	74.00	16.60	Peak
2389.950	31.89	7.95	34.54	50.94	56.24	74.00	17.76	Peak
@ 2431.650	32.09	7.97	34.54	96.25	101.77	---	---	Peak

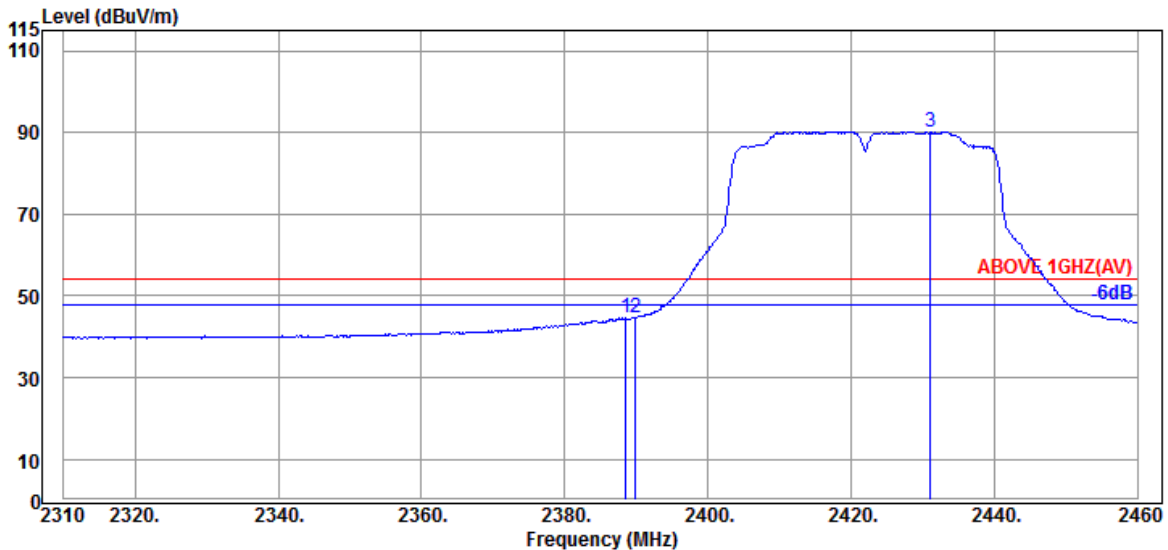


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	31.89	7.95	34.53	39.34	44.65	54.00	9.35	Average
2389.950	31.89	7.95	34.54	39.36	44.66	54.00	9.34	Average
@ 2431.050	32.09	7.97	34.54	84.71	90.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

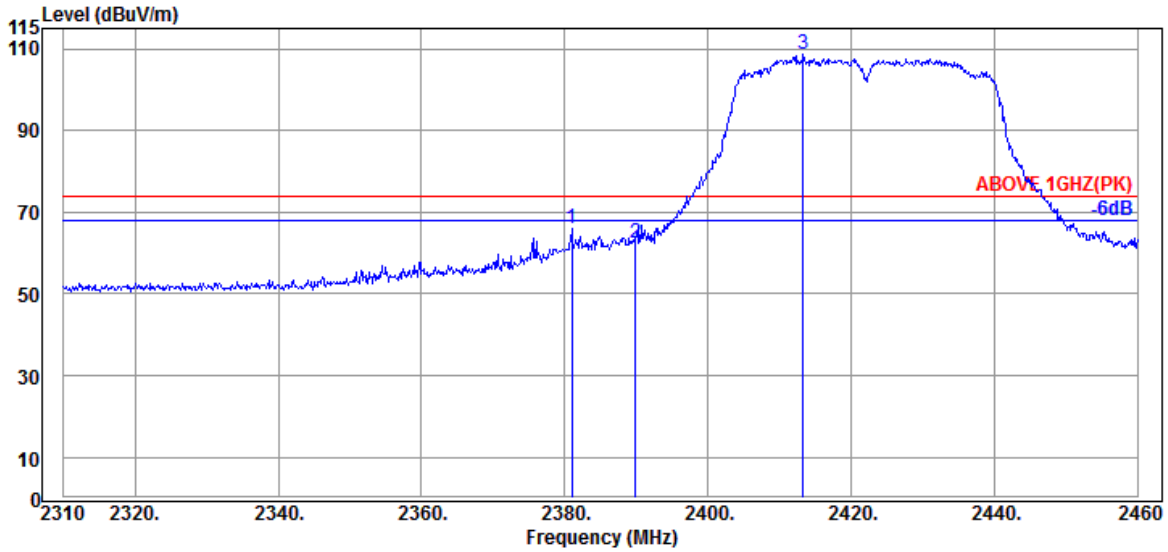

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.950	31.93	7.95	34.53	60.69	66.04	74.00	7.96	Peak
2389.950	31.89	7.95	34.54	57.22	62.52	74.00	11.48	Peak
@ 2413.350	31.94	7.96	34.54	103.37	108.73	---	---	Peak

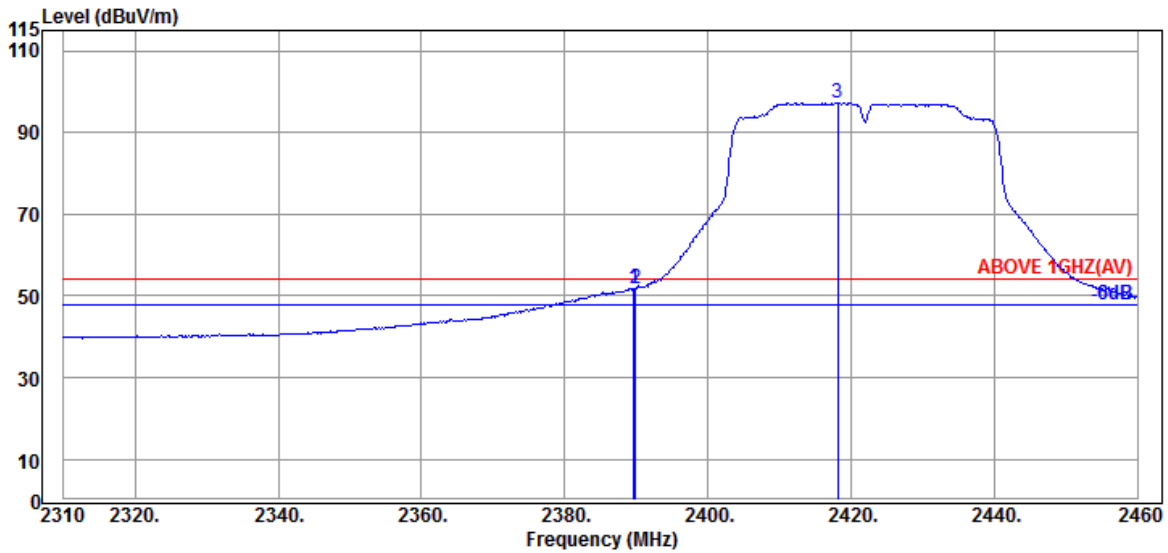


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	46.43	51.74	54.00	2.26	Average
2389.950	31.89	7.95	34.54	46.46	51.76	54.00	2.24	Average
@ 2418.150	31.94	7.96	34.54	91.80	97.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

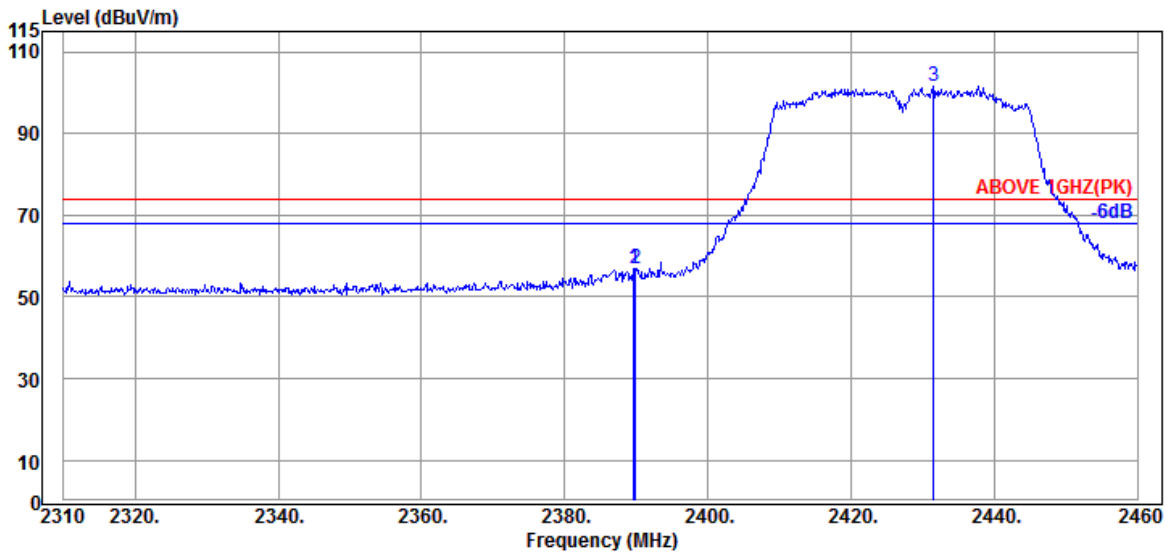

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	51.72	57.03	74.00	16.97	Peak
2389.950	31.89	7.95	34.54	51.66	56.96	74.00	17.04	Peak
@ 2431.500	32.09	7.97	34.54	96.16	101.68	---	---	Peak

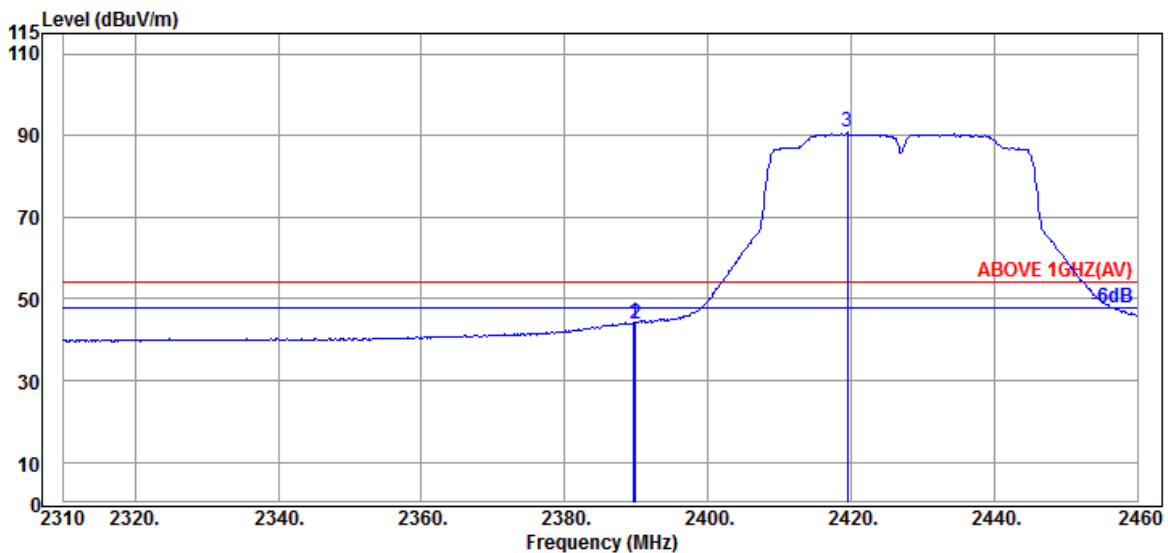


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	38.82	44.13	54.00	9.87	Average
2389.950	31.89	7.95	34.54	38.71	44.01	54.00	9.99	Average
@ 2419.500	32.01	7.96	34.54	85.29	90.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

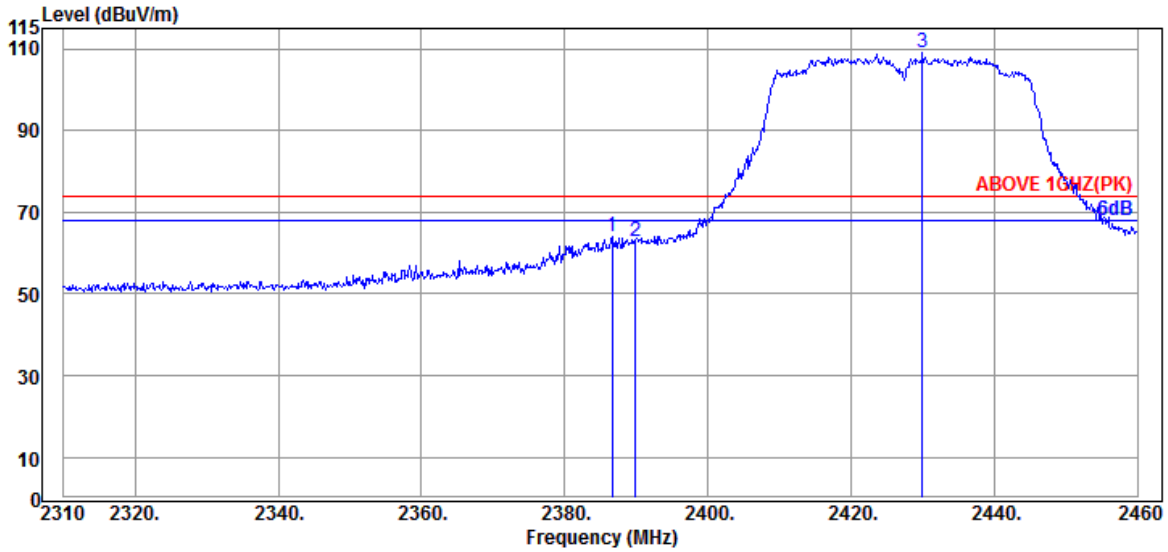

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.650	31.89	7.95	34.53	58.65	63.96	74.00	10.04	Peak
2389.950	31.89	7.95	34.54	57.55	62.85	74.00	11.15	Peak
@ 2421.000	32.09	7.97	34.54	103.51	109.03	---	---	Peak

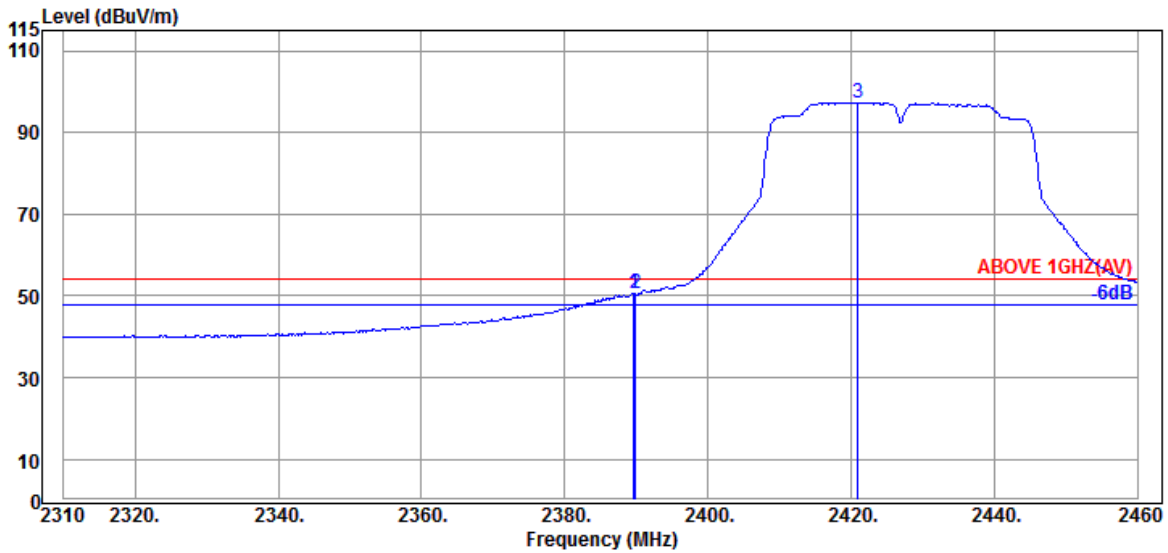


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	45.42	50.73	54.00	3.27	Average
2389.950	31.89	7.95	34.54	45.12	50.42	54.00	3.58	Average
@ 2421.000	32.01	7.96	34.54	91.90	97.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

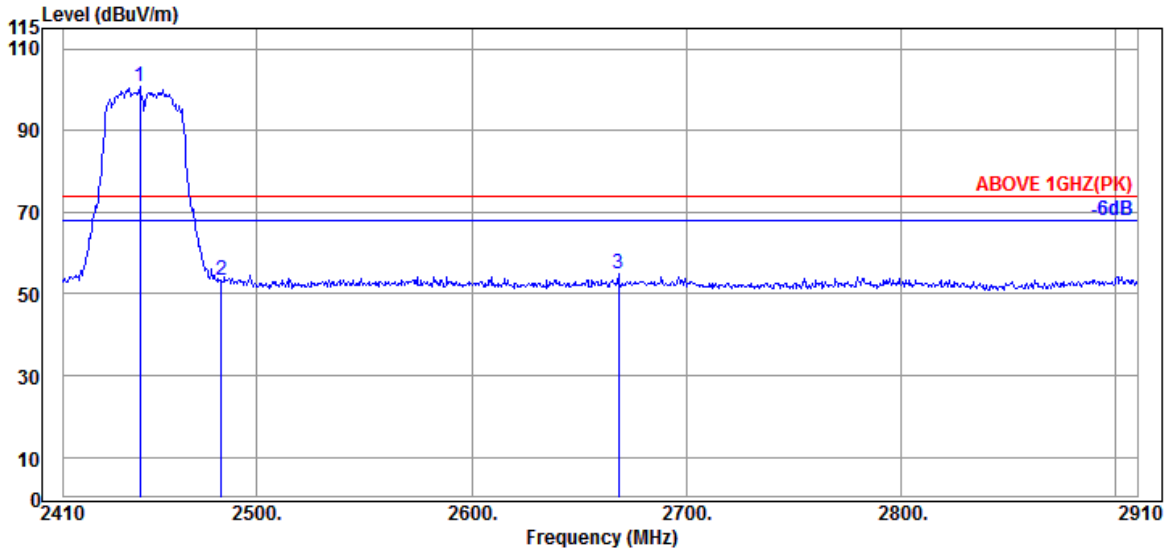

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.500	32.23	7.98	34.55	94.95	100.61	---	---	Peak
2483.500	32.30	7.99	34.55	47.68	53.42	74.00	20.58	Peak
2668.500	32.20	8.08	34.59	49.23	54.92	74.00	19.08	Peak

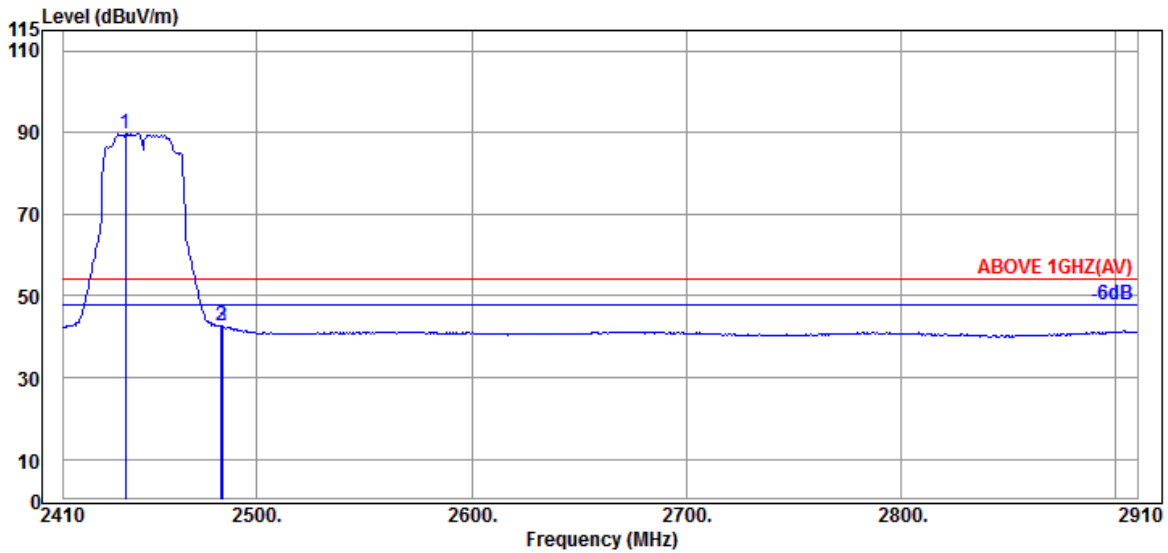


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2439.000	32.16	7.98	34.54	84.12	89.72	---	---	Average
2483.500	32.30	7.99	34.55	36.91	42.65	54.00	11.35	Average
2484.000	32.30	7.99	34.55	36.81	42.55	54.00	11.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

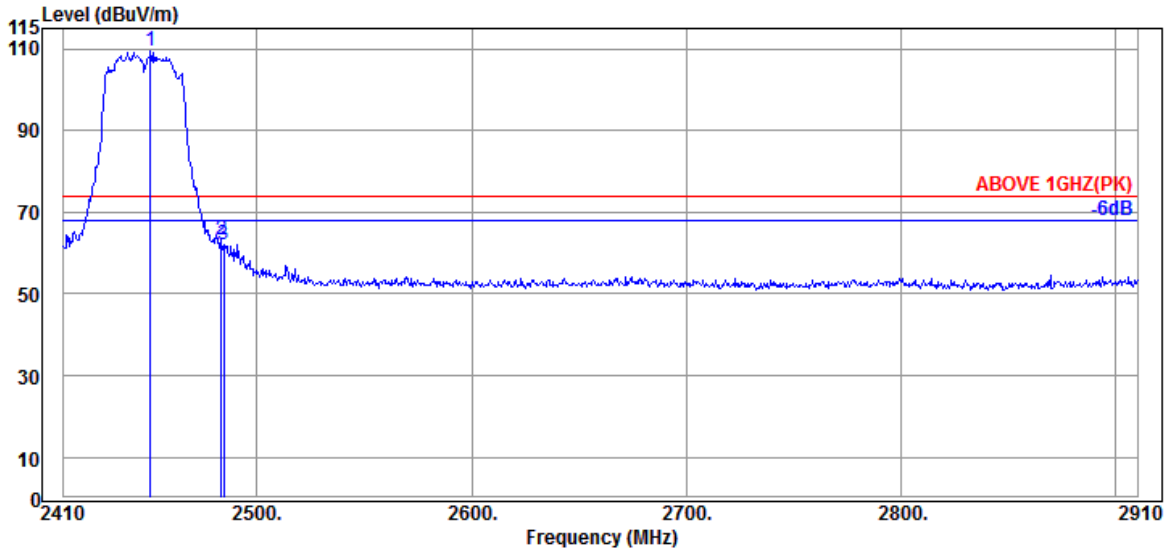

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.500	32.30	7.98	34.55	103.67	109.40	---	---	Peak
2483.500	32.30	7.99	34.55	57.44	63.18	74.00	10.82	Peak
2484.500	32.30	7.99	34.55	56.11	61.85	74.00	12.15	Peak

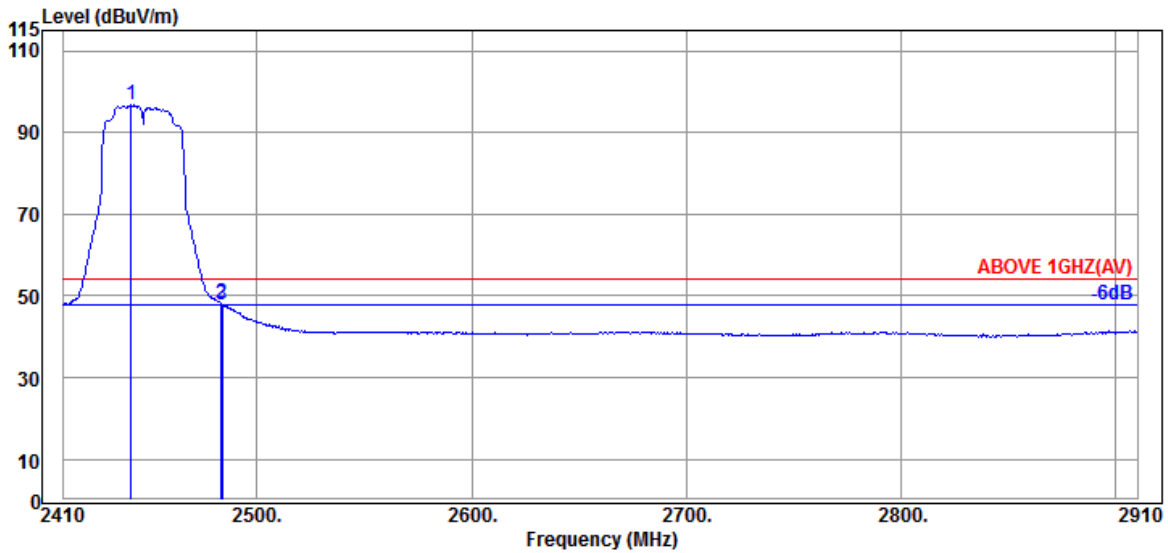


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2441.500	32.23	7.98	34.55	91.14	96.80	---	---	Average
2483.500	32.30	7.99	34.55	42.45	48.19	54.00	5.81	Average
2484.000	32.30	7.99	34.55	42.15	47.89	54.00	6.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

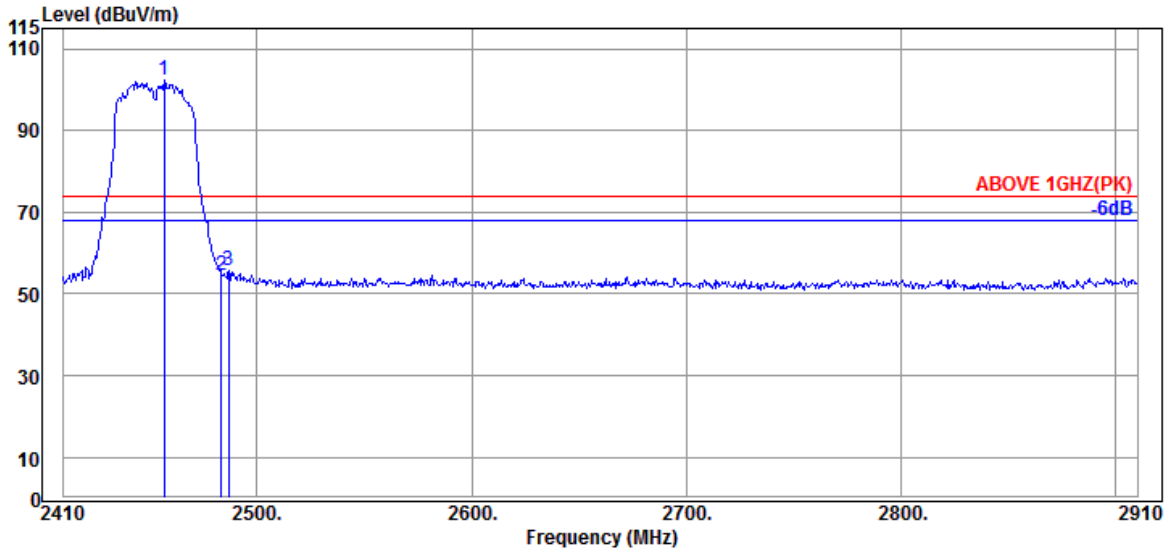

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.000	32.30	7.98	34.55	96.46	102.19	---	---	Peak
2483.500	32.30	7.99	34.55	48.78	54.52	74.00	19.48	Peak
2487.000	32.30	8.00	34.55	49.87	55.62	74.00	18.38	Peak

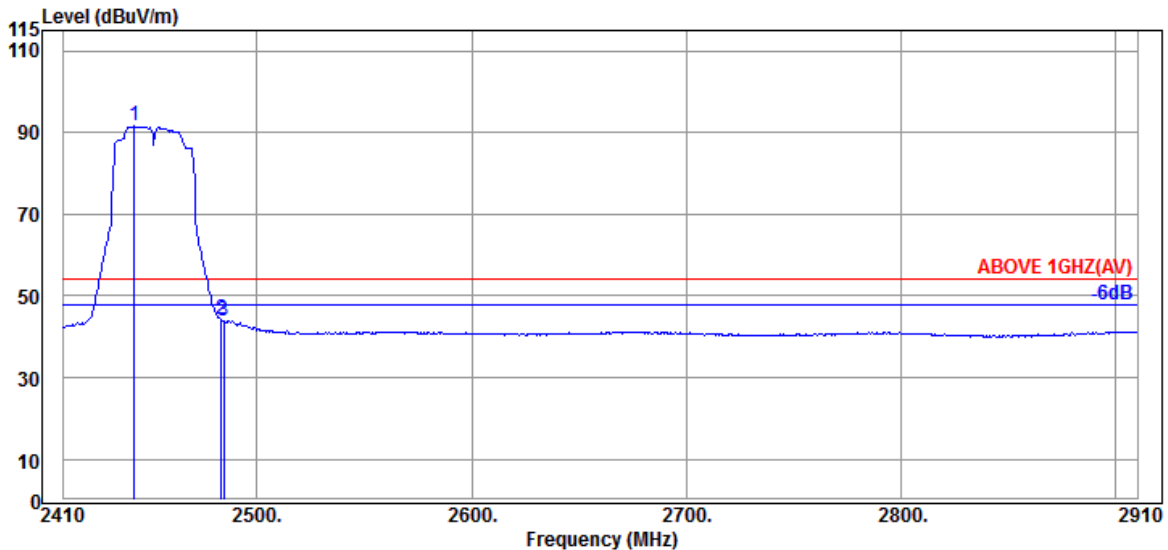


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2443.000	32.23	7.98	34.55	86.03	91.69	---	---	Average
2483.500	32.30	7.99	34.55	38.35	44.09	54.00	9.91	Average
2484.500	32.30	7.99	34.55	38.09	43.83	54.00	10.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

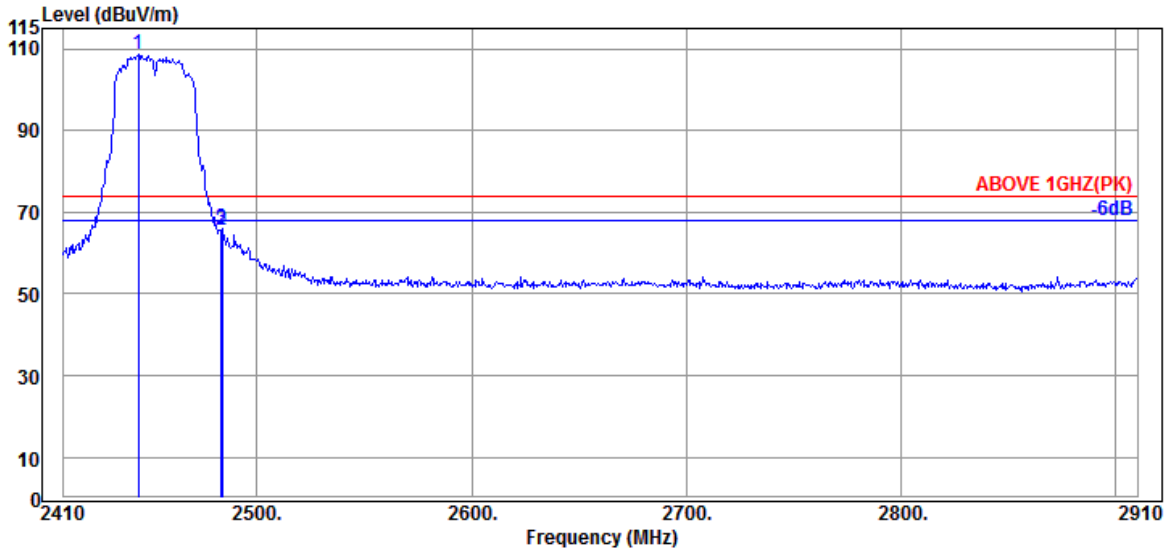

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2445.000	32.23	7.98	34.55	102.94	108.60	---	---	Peak
	2483.500	32.30	7.99	34.55	59.87	65.61	74.00	8.39	Peak
	2484.000	32.30	7.99	34.55	60.32	66.06	74.00	7.94	Peak

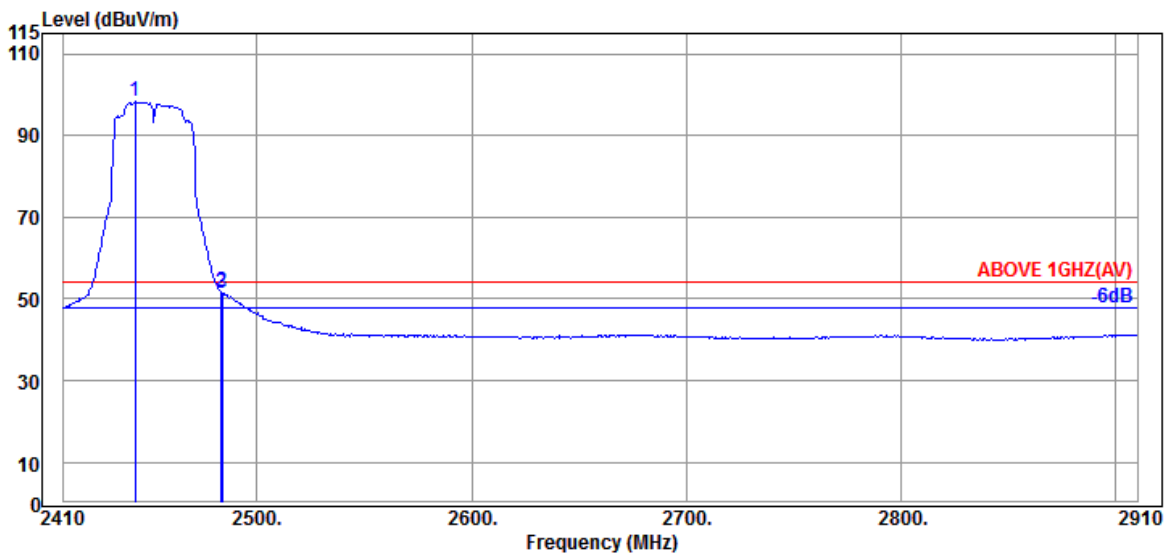


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2443.500	32.23	7.98	34.55	92.57	98.23	---	---	Average
	2483.500	32.30	7.99	34.55	46.07	51.81	54.00	2.19	Average
	2484.000	32.30	7.99	34.55	45.72	51.46	54.00	2.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

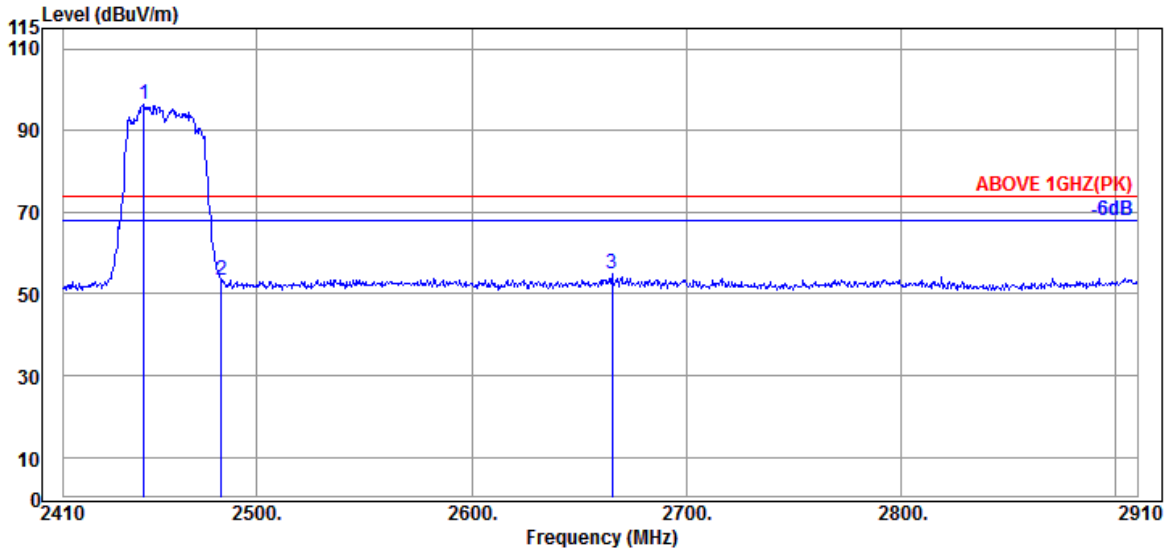

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.500	32.30	7.98	34.55	90.61	96.34	---	---	Peak
2483.500	32.30	7.99	34.55	47.55	53.29	74.00	20.71	Peak
2665.500	32.20	8.08	34.59	49.08	54.77	74.00	19.23	Peak

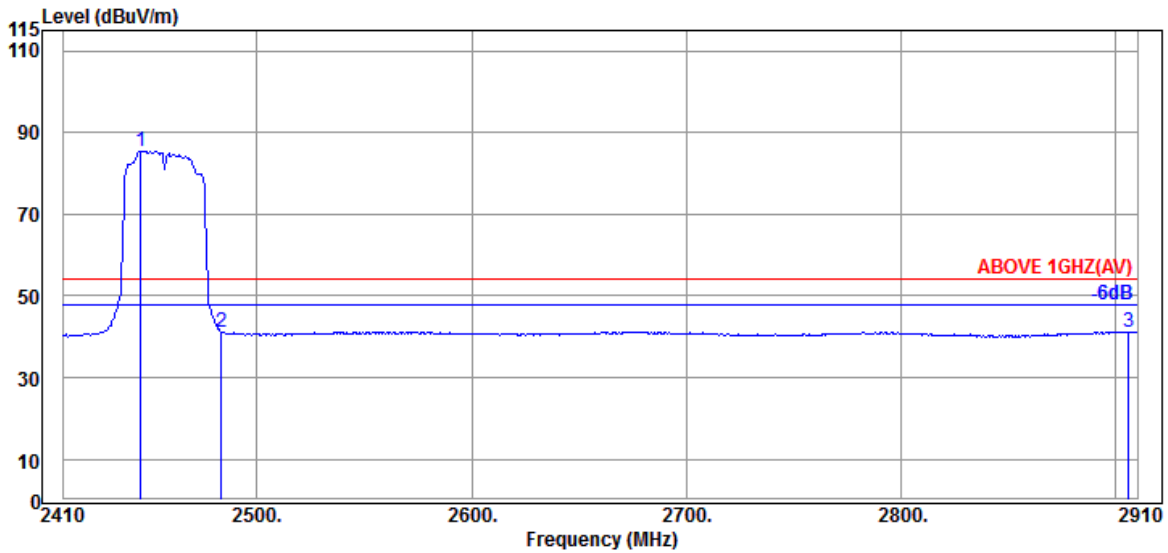


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	32.23	7.98	34.55	79.78	85.44	---	---	Average
2483.500	32.30	7.99	34.55	35.35	41.09	54.00	12.91	Average
2906.000	32.77	8.18	34.64	34.92	41.23	54.00	12.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

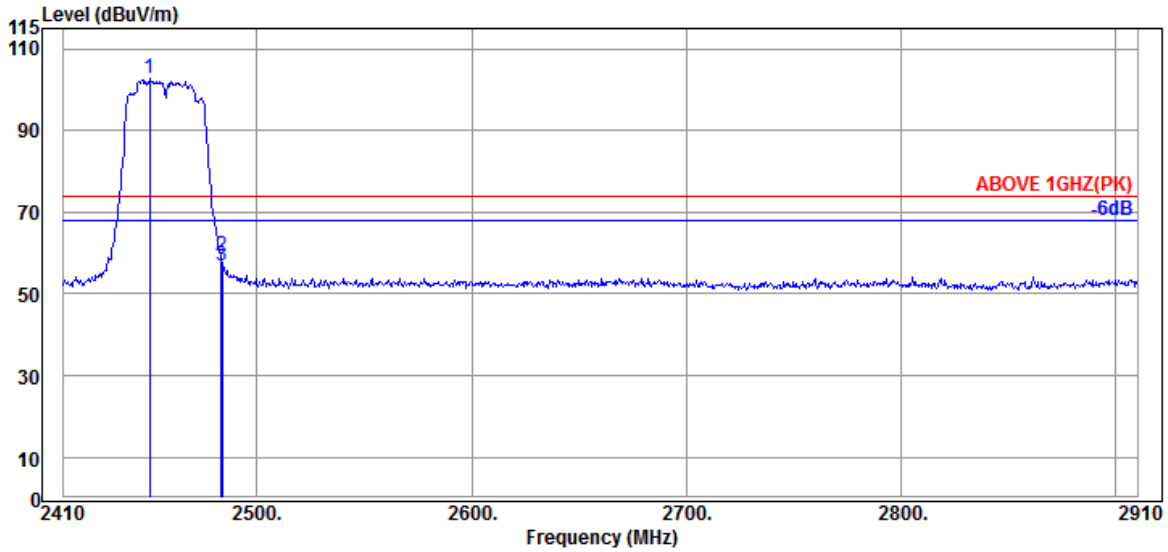

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.000	32.30	7.98	34.55	97.00	102.73	---	---	Peak
2483.500	32.30	7.99	34.55	53.70	59.44	74.00	14.56	Peak
2484.000	32.30	7.99	34.55	51.07	56.81	74.00	17.19	Peak

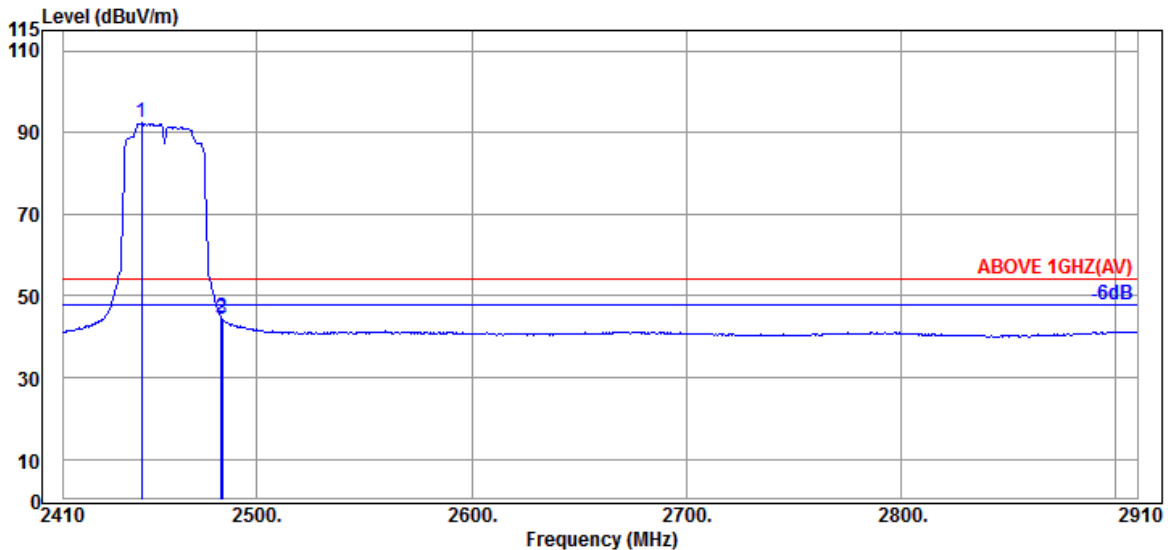


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.500	32.30	7.98	34.55	86.59	92.32	---	---	Average
2483.500	32.30	7.99	34.55	38.88	44.62	54.00	9.38	Average
2484.000	32.30	7.99	34.55	38.61	44.35	54.00	9.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

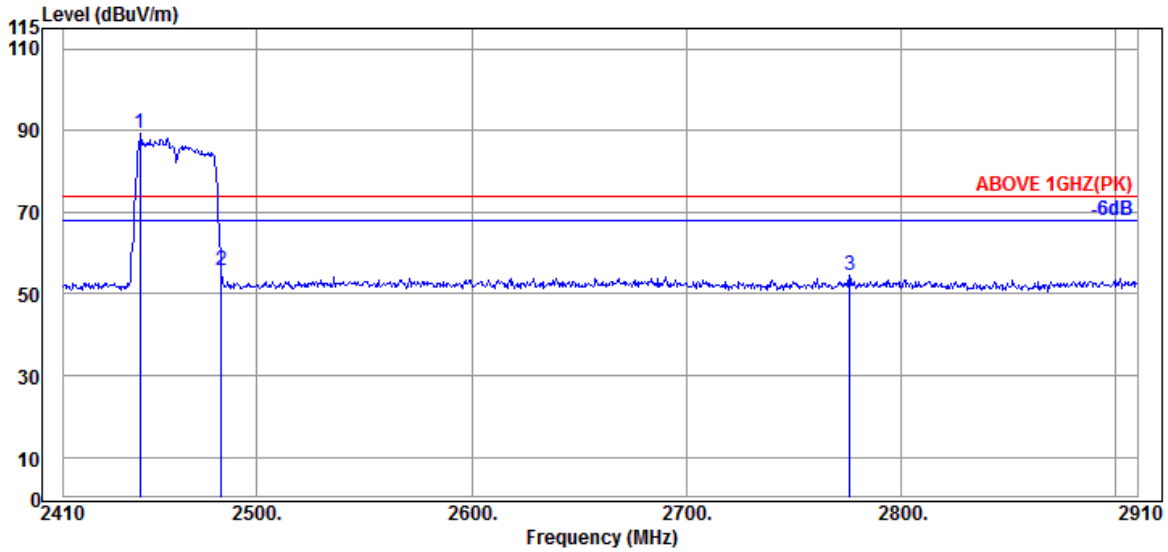

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2445.500	32.23	7.98	34.55	83.57	89.23	---	---	Peak
	2483.500	32.30	7.99	34.55	50.15	55.89	74.00	18.11	Peak
	2776.000	32.30	8.13	34.62	48.74	54.55	74.00	19.45	Peak

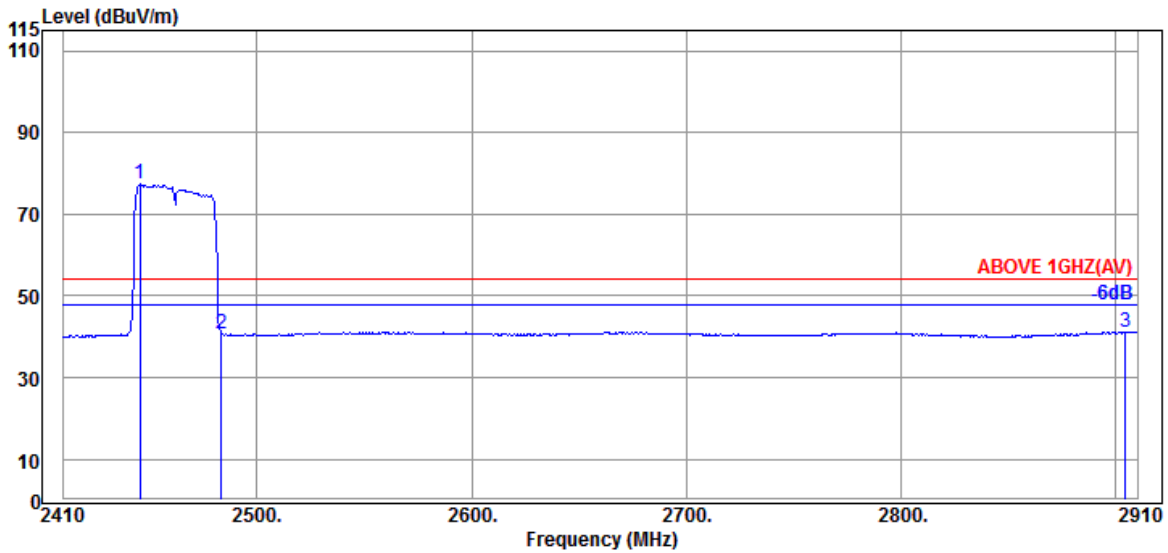


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2445.500	32.23	7.98	34.55	71.60	77.26	---	---	Average
	2483.500	32.30	7.99	34.55	34.95	40.69	54.00	13.31	Average
	2904.500	32.77	8.18	34.64	34.91	41.22	54.00	12.78	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

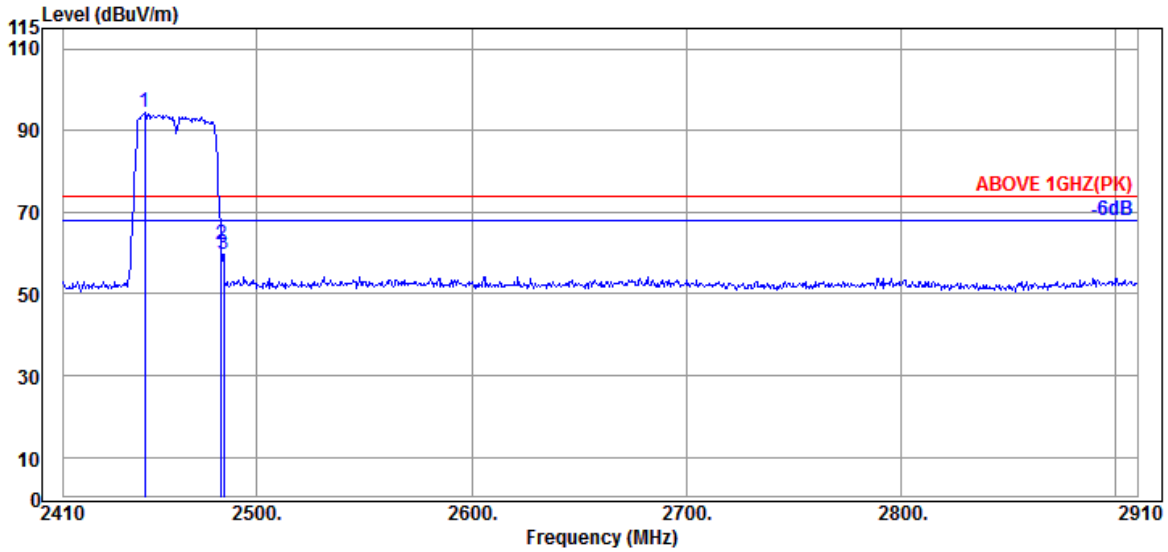

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.000	32.30	7.98	34.55	88.86	94.59	---	---	Peak
2483.500	32.30	7.99	34.55	56.43	62.17	74.00	11.83	Peak
2484.500	32.30	7.99	34.55	53.84	59.58	74.00	14.42	Peak

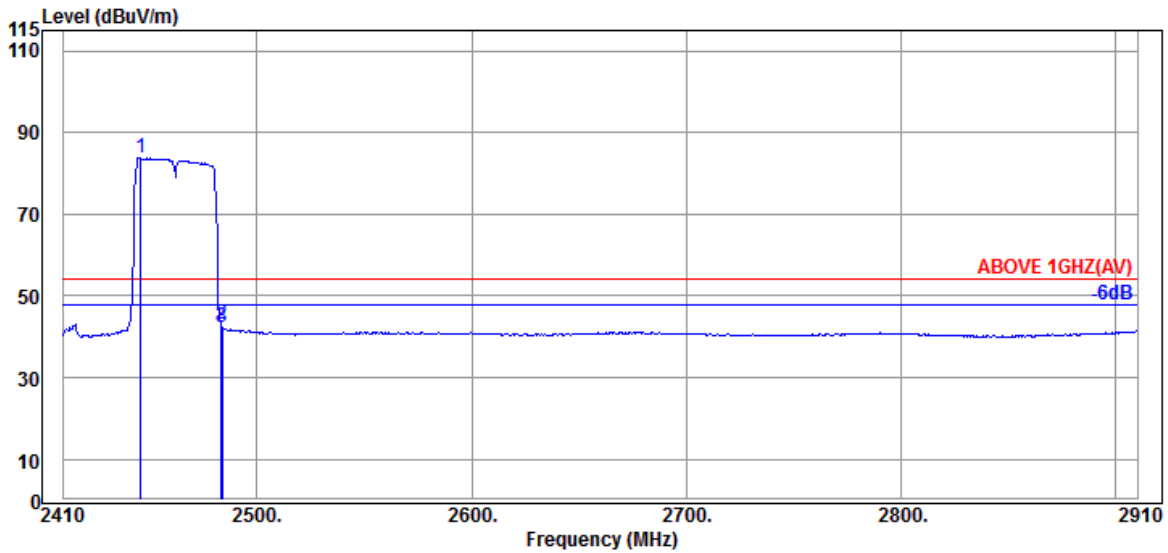


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	32.23	7.98	34.55	78.16	83.82	---	---	Average
2483.500	32.30	7.99	34.55	37.15	42.89	54.00	11.11	Average
2484.000	32.30	7.99	34.55	36.39	42.13	54.00	11.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

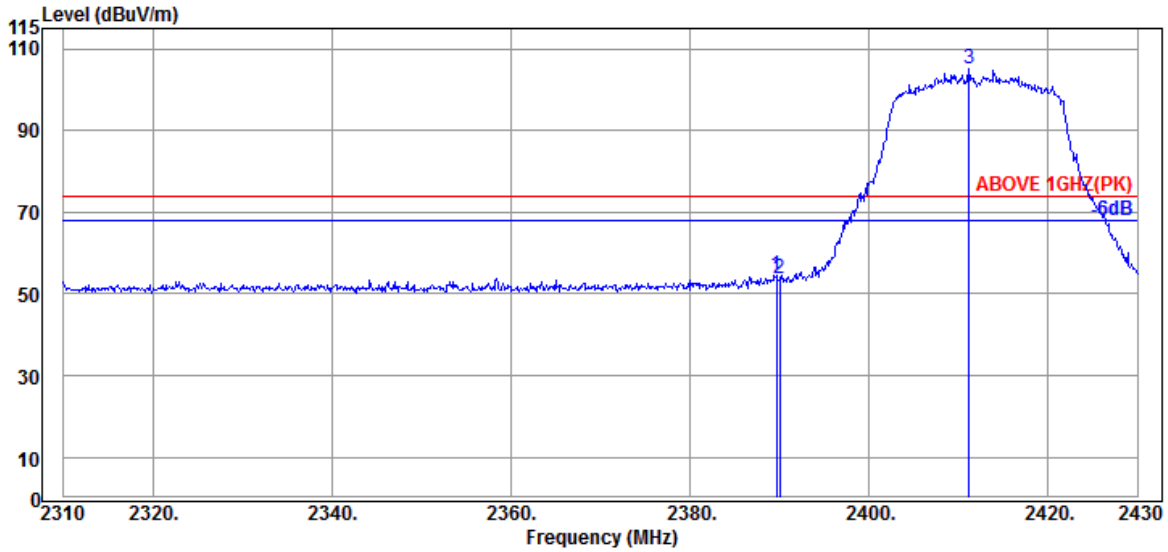

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	49.31	54.62	74.00	19.38	Peak
2390.040	31.89	7.95	34.54	48.30	53.60	74.00	20.40	Peak
@ 2411.160	31.87	7.96	34.54	99.85	105.14	---	---	Peak

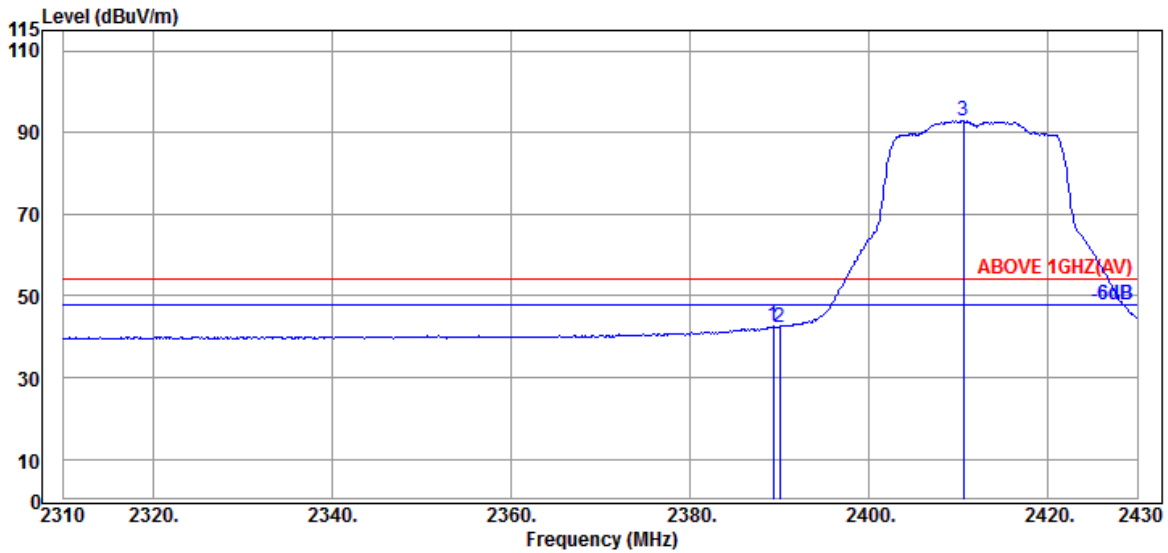


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	31.89	7.95	34.53	37.25	42.56	54.00	11.44	Average
2390.040	31.89	7.95	34.54	37.08	42.38	54.00	11.62	Average
@ 2410.560	31.87	7.96	34.54	87.45	92.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

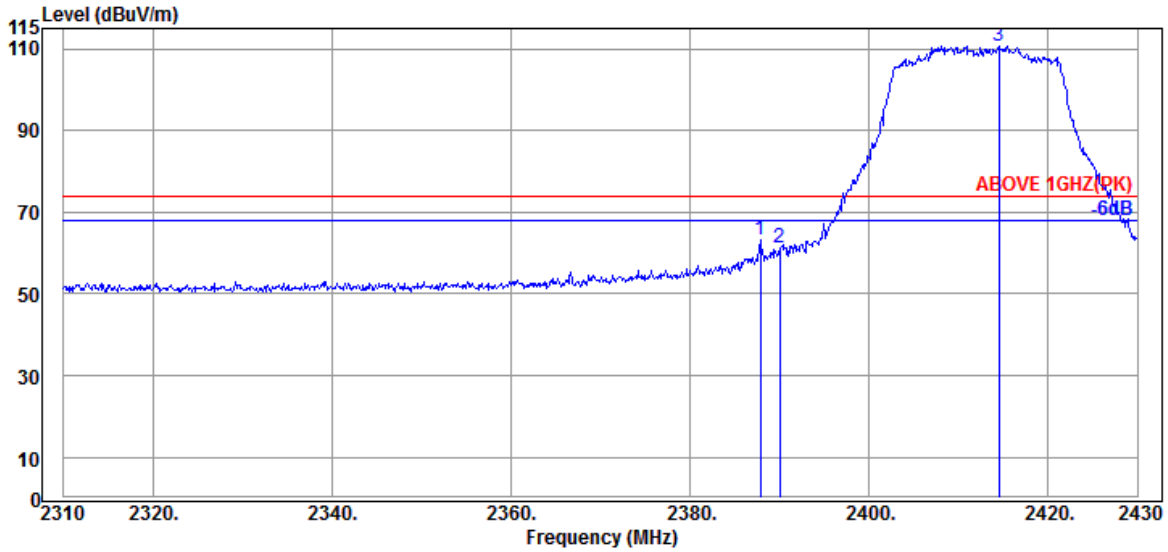

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.880	31.89	7.95	34.53	57.94	63.25	74.00	10.75	Peak
2390.040	31.89	7.95	34.54	55.86	61.16	74.00	12.84	Peak
@ 2414.520	31.94	7.96	34.54	105.30	110.66	---	---	Peak

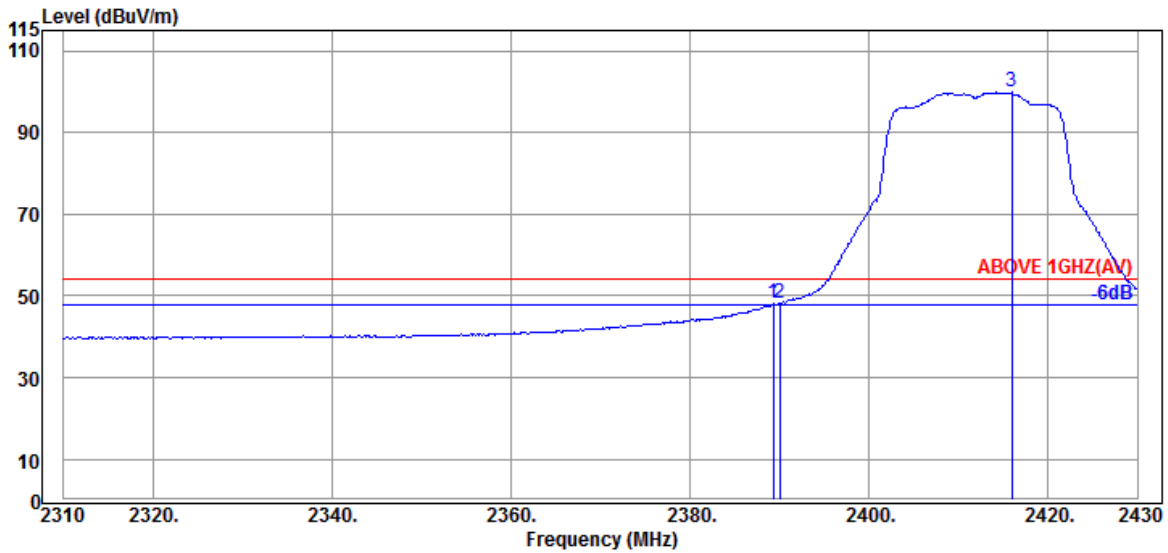


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	31.89	7.95	34.53	42.75	48.06	54.00	5.94	Average
2390.040	31.89	7.95	34.54	42.98	48.28	54.00	5.72	Average
@ 2415.960	31.94	7.96	34.54	94.46	99.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

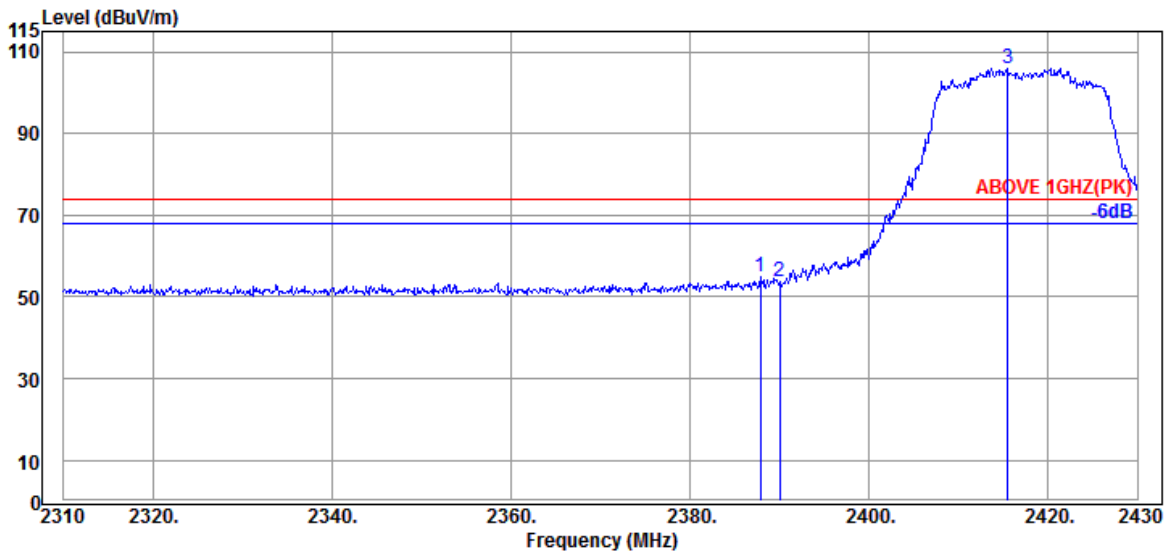

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.880	31.89	7.95	34.53	49.68	54.99	74.00	19.01	Peak
2390.040	31.89	7.95	34.54	48.29	53.59	74.00	20.41	Peak
@ 2415.480	31.94	7.96	34.54	100.67	106.03	---	---	Peak

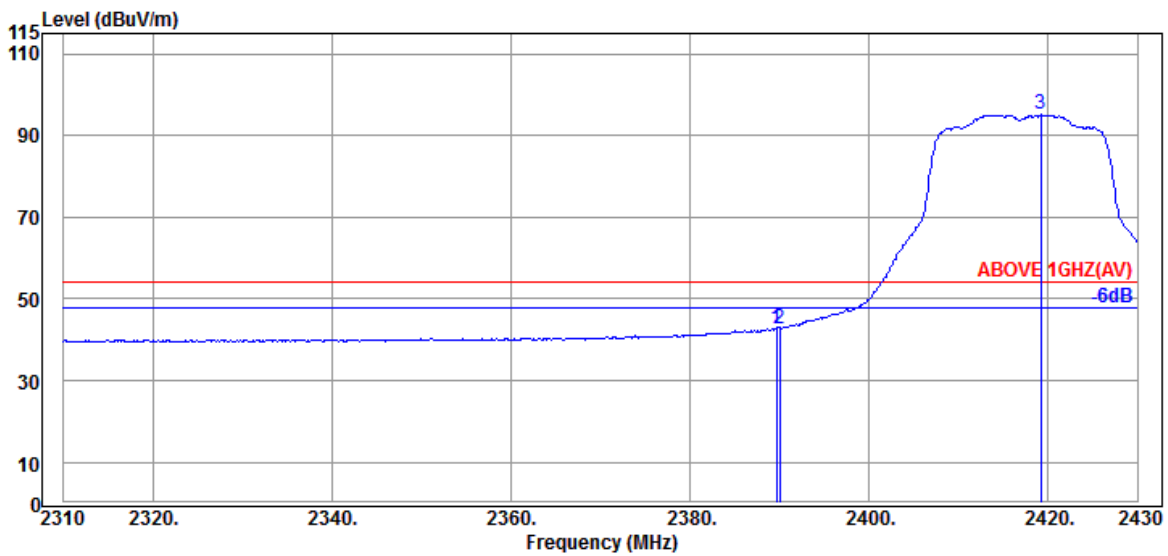


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.50	42.81	54.00	11.19	Average
2390.040	31.89	7.95	34.54	37.51	42.81	54.00	11.19	Average
@ 2419.200	32.01	7.96	34.54	89.79	95.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

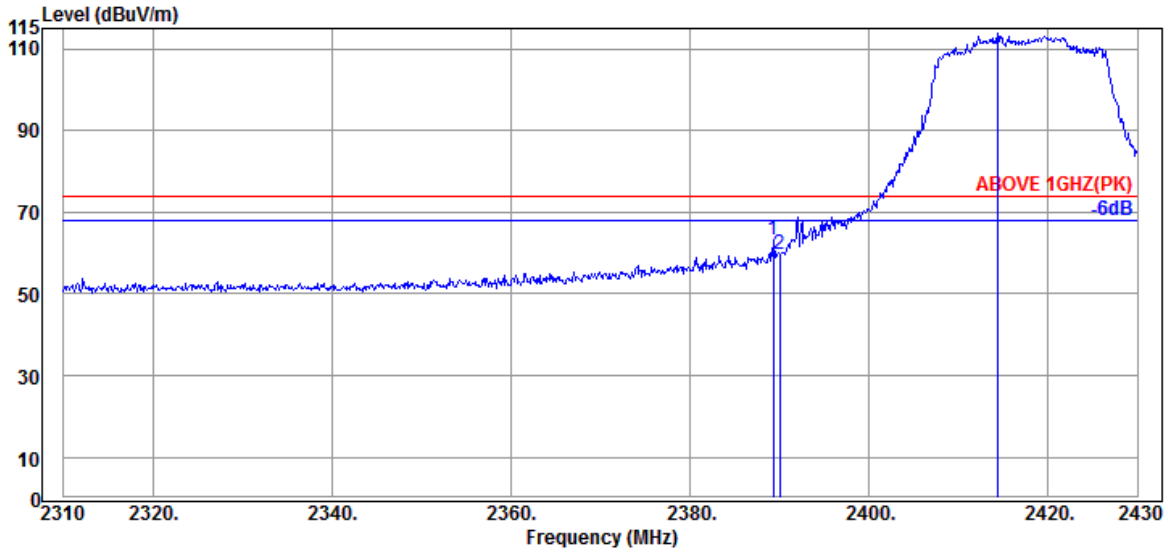

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	31.89	7.95	34.53	57.74	63.05	74.00	10.95	Peak
2390.040	31.89	7.95	34.54	54.20	59.50	74.00	14.50	Peak
@ 2414.400	31.94	7.96	34.54	108.53	113.89	---	---	Peak

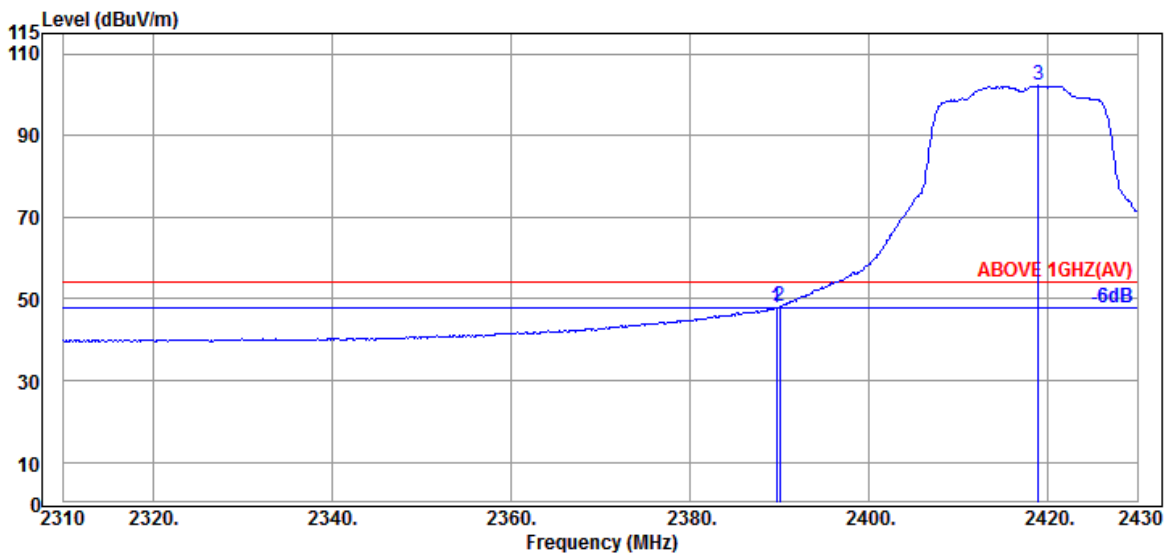


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	42.56	47.87	54.00	6.13	Average
2390.040	31.89	7.95	34.54	42.72	48.02	54.00	5.98	Average
@ 2418.960	32.01	7.96	34.54	96.75	102.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

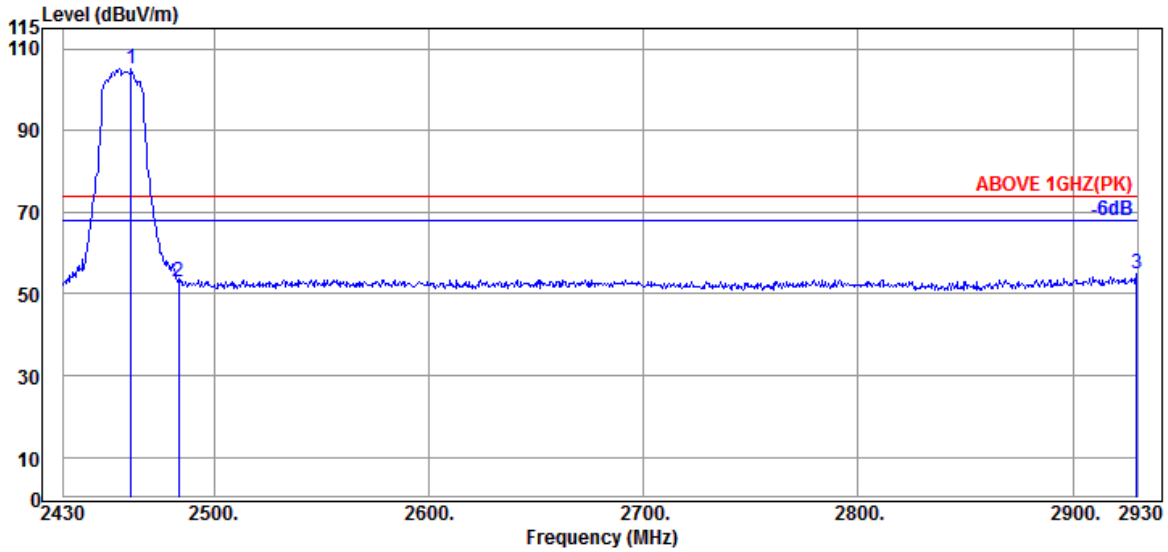

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	32.30	7.98	34.55	99.47	105.20	---	---	Peak
2483.500	32.30	7.99	34.55	47.19	52.93	74.00	21.07	Peak
2929.500	32.97	8.19	34.65	48.41	54.92	74.00	19.08	Peak

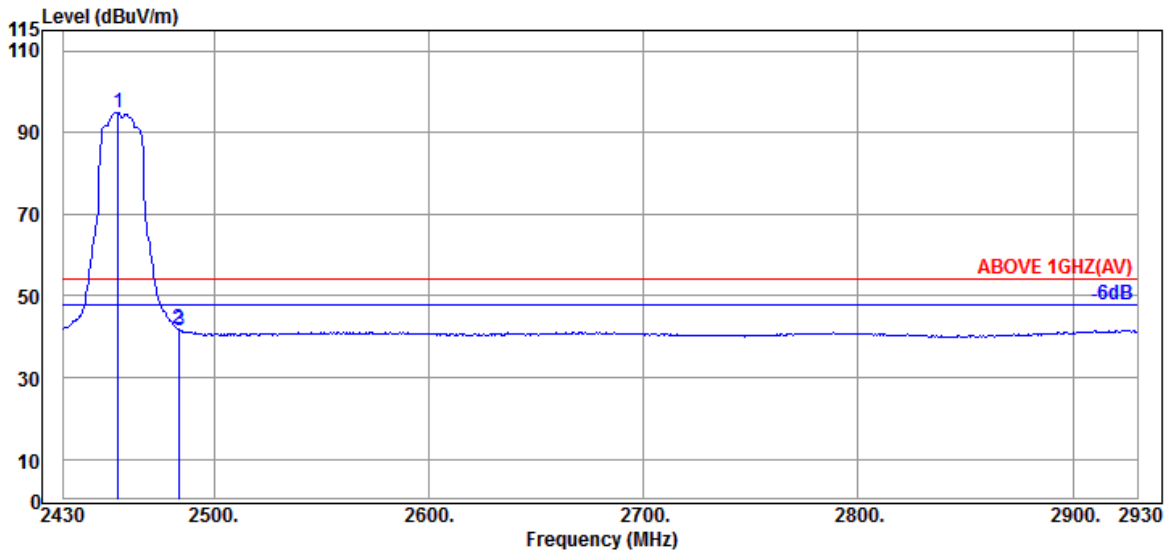


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	32.30	7.98	34.55	89.23	94.96	---	---	Average
2483.500	32.30	7.99	34.55	36.17	41.91	54.00	12.09	Average
2484.000	32.30	7.99	34.55	35.76	41.50	54.00	12.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

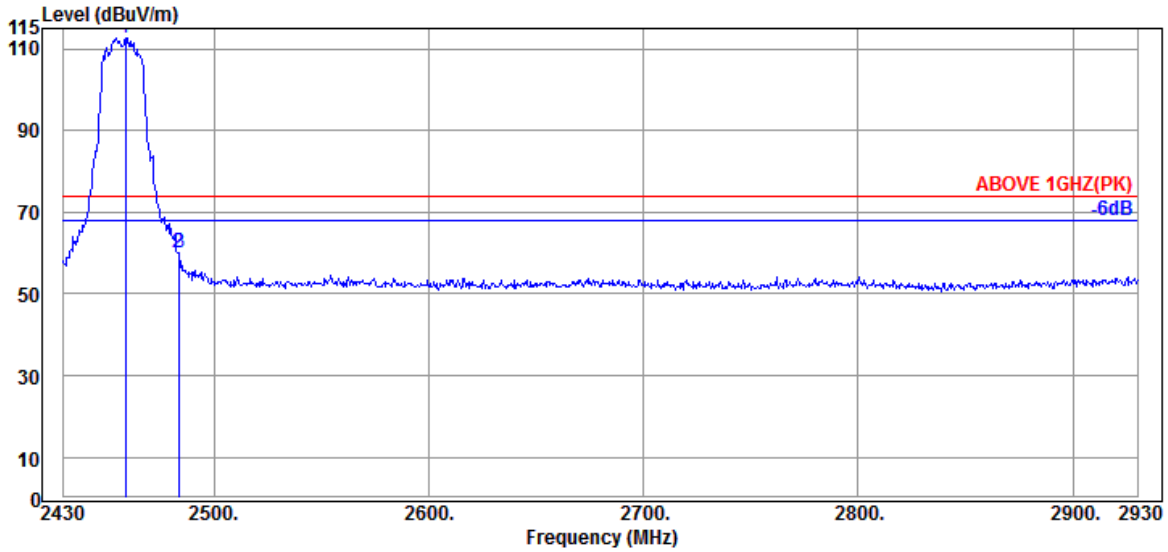

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	106.97	112.70	---	---	Peak
2483.500	32.30	7.99	34.55	54.20	59.94	74.00	14.06	Peak
2484.000	32.30	7.99	34.55	54.16	59.90	74.00	14.10	Peak

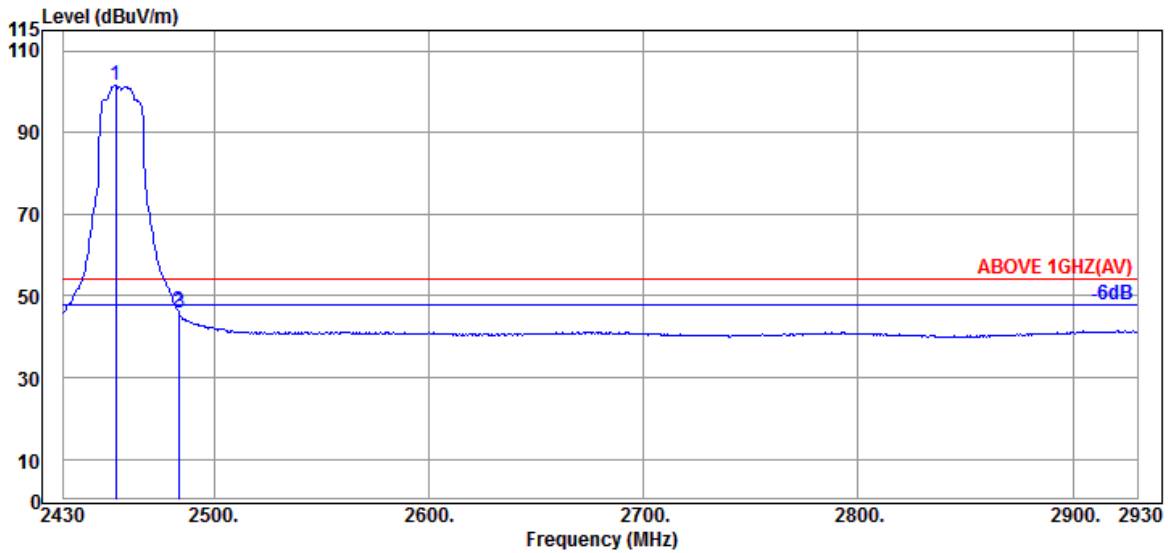


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	95.72	101.45	---	---	Average
2483.500	32.30	7.99	34.55	40.53	46.27	54.00	7.73	Average
2484.000	32.30	7.99	34.55	40.07	45.81	54.00	8.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

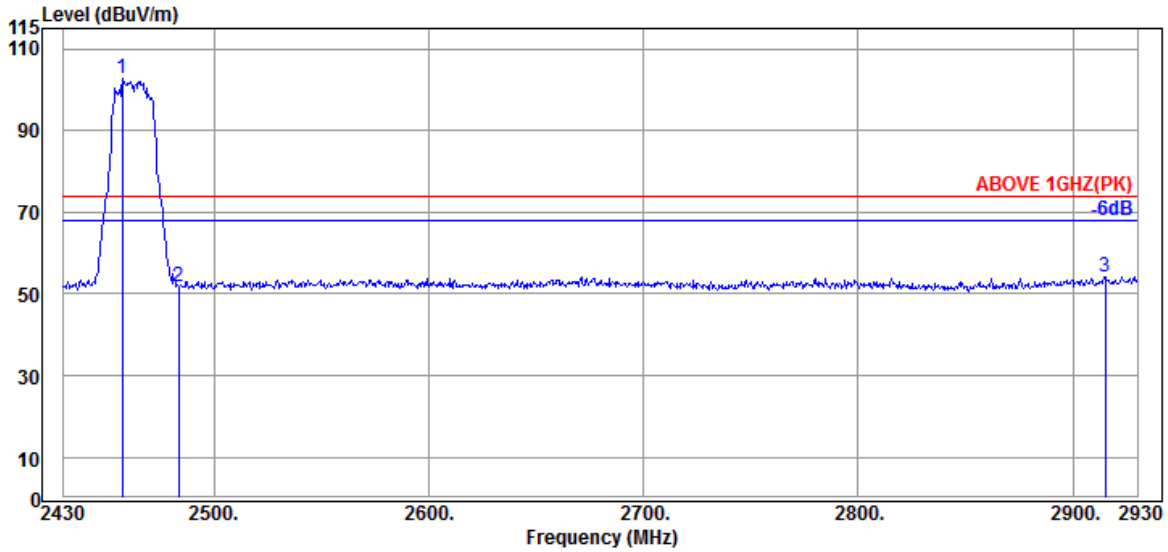

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.500	32.30	7.98	34.55	96.83	102.56	---	---	Peak
2483.500	32.30	7.99	34.55	46.04	51.78	74.00	22.22	Peak
2915.000	32.83	8.18	34.64	47.90	54.27	74.00	19.73	Peak

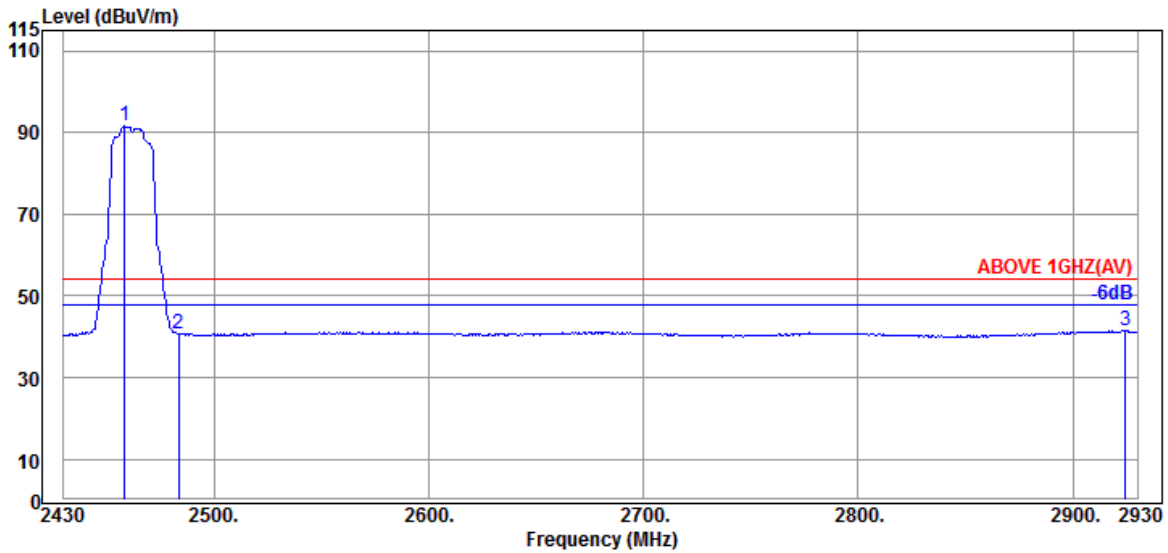


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	85.83	91.56	---	---	Average
2483.500	32.30	7.99	34.55	34.95	40.69	54.00	13.31	Average
2924.500	32.90	8.19	34.64	35.18	41.63	54.00	12.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

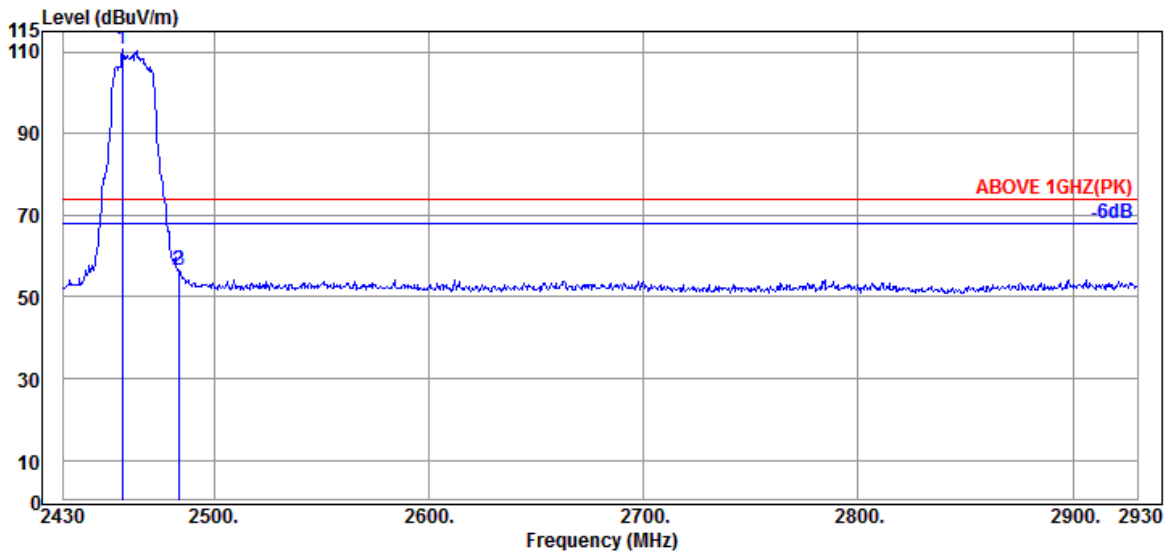

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.500	32.30	7.98	34.55	104.87	110.60	---	---	Peak
2483.500	32.30	7.99	34.55	50.64	56.38	74.00	17.62	Peak
2484.000	32.30	7.99	34.55	50.80	56.54	74.00	17.46	Peak

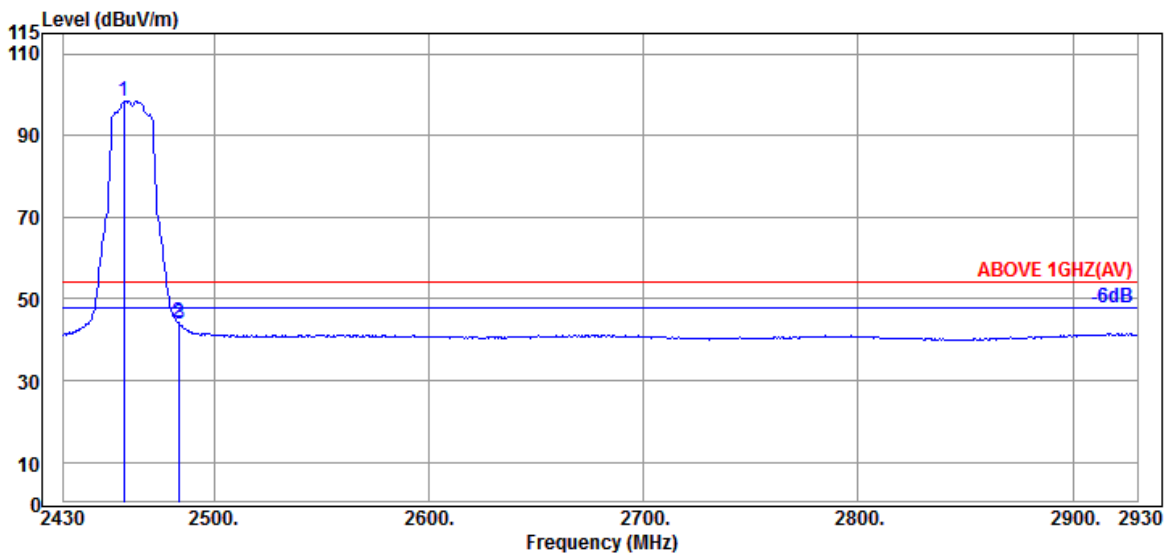


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	32.30	7.98	34.55	92.68	98.41	---	---	Average
2483.500	32.30	7.99	34.55	38.38	44.12	54.00	9.88	Average
2484.000	32.30	7.99	34.55	38.21	43.95	54.00	10.05	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

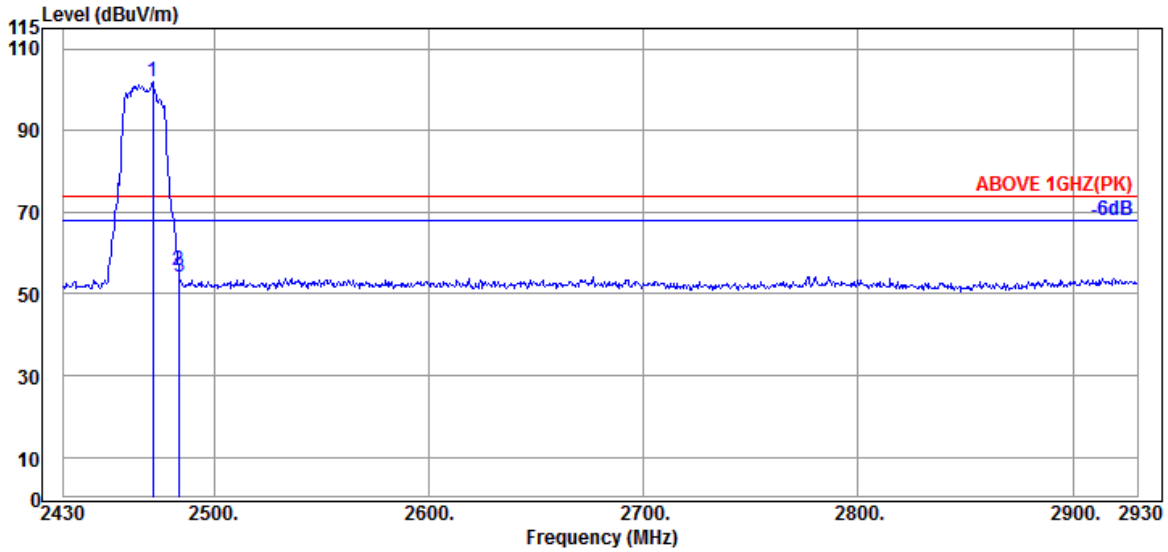

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	32.30	7.99	34.55	96.27	102.01	---	---	Peak
2483.500	32.30	7.99	34.55	50.13	55.87	74.00	18.13	Peak
2484.000	32.30	7.99	34.55	48.47	54.21	74.00	19.79	Peak

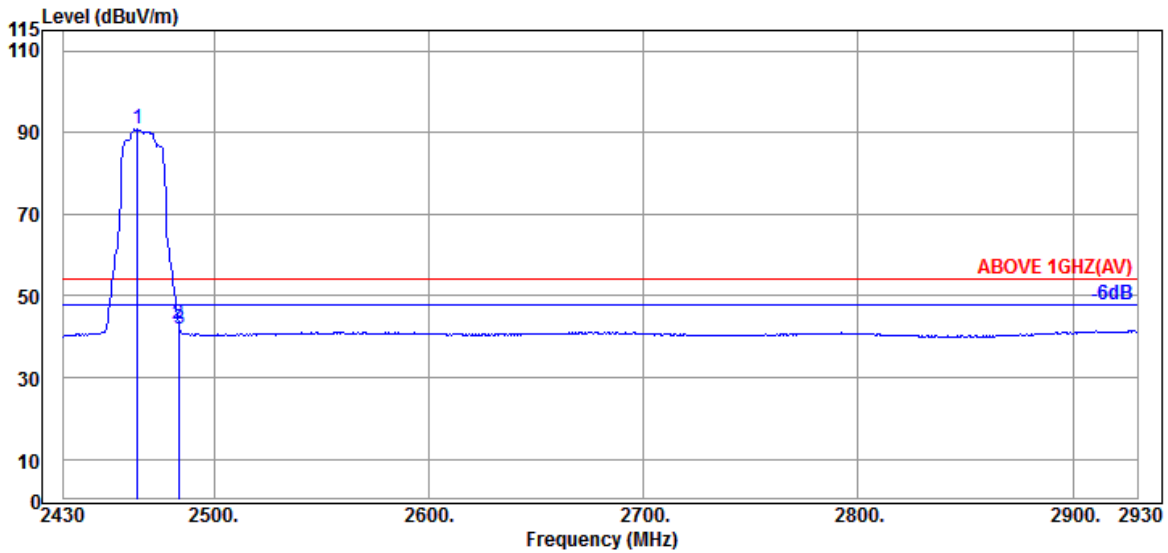


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	85.11	90.84	---	---	Average
2483.500	32.30	7.99	34.55	37.47	43.21	54.00	10.79	Average
2484.000	32.30	7.99	34.55	36.24	41.98	54.00	12.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

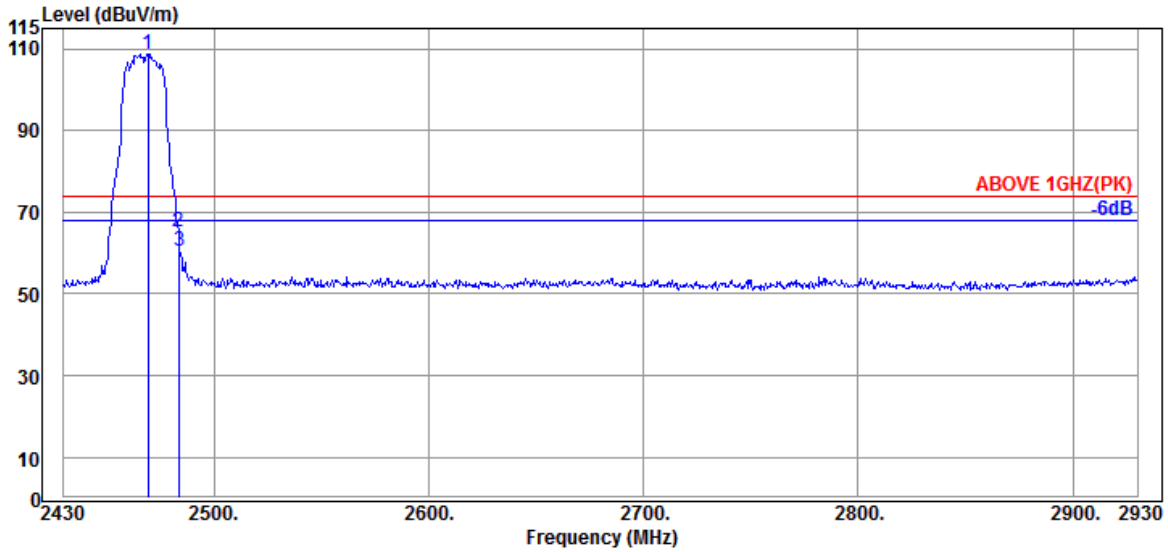

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	32.30	7.98	34.55	103.11	108.84	---	---	Peak
2483.500	32.30	7.99	34.55	59.56	65.30	74.00	8.70	Peak
2484.000	32.30	7.99	34.55	54.77	60.51	74.00	13.49	Peak

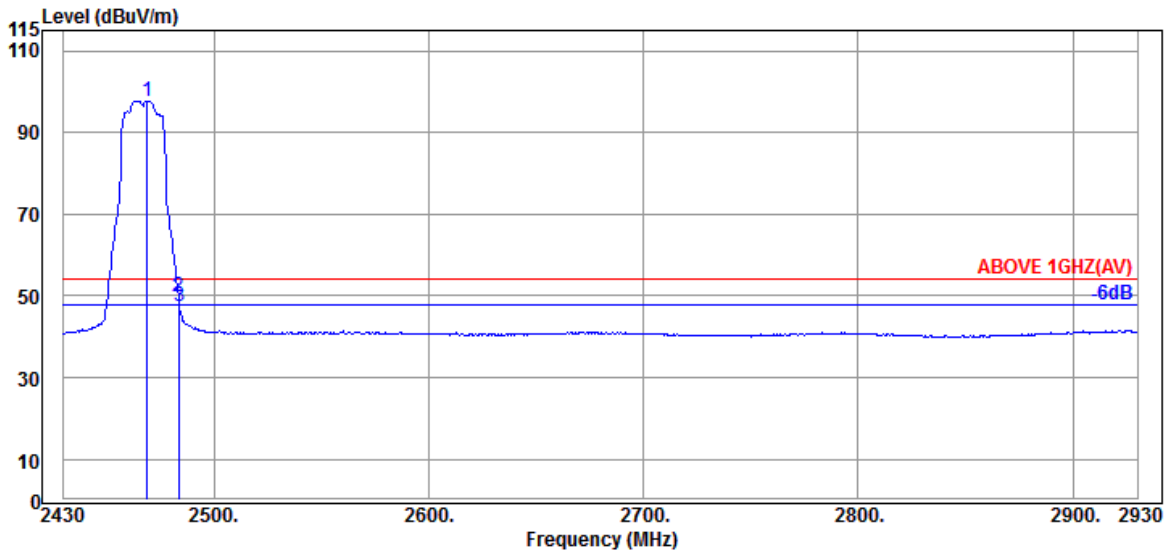


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	32.30	7.98	34.55	92.04	97.77	---	---	Average
2483.500	32.30	7.99	34.55	43.88	49.62	54.00	4.38	Average
2484.000	32.30	7.99	34.55	41.70	47.44	54.00	6.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

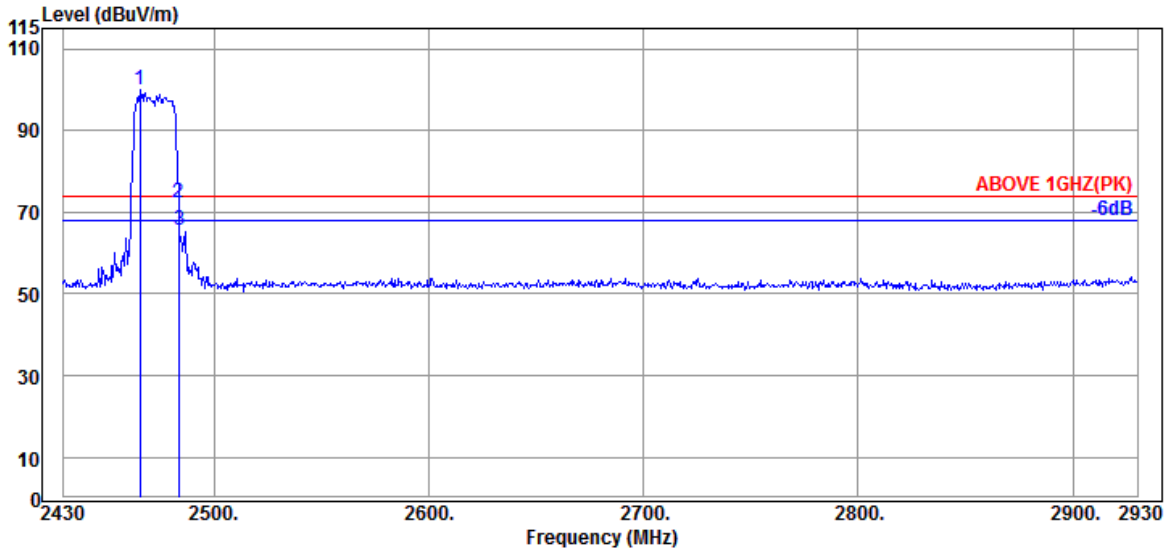

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	94.16	99.89	---	---	Peak
2483.500	32.30	7.99	34.55	66.49	72.23	74.00	1.77	Peak
2484.000	32.30	7.99	34.55	59.98	65.72	74.00	8.28	Peak

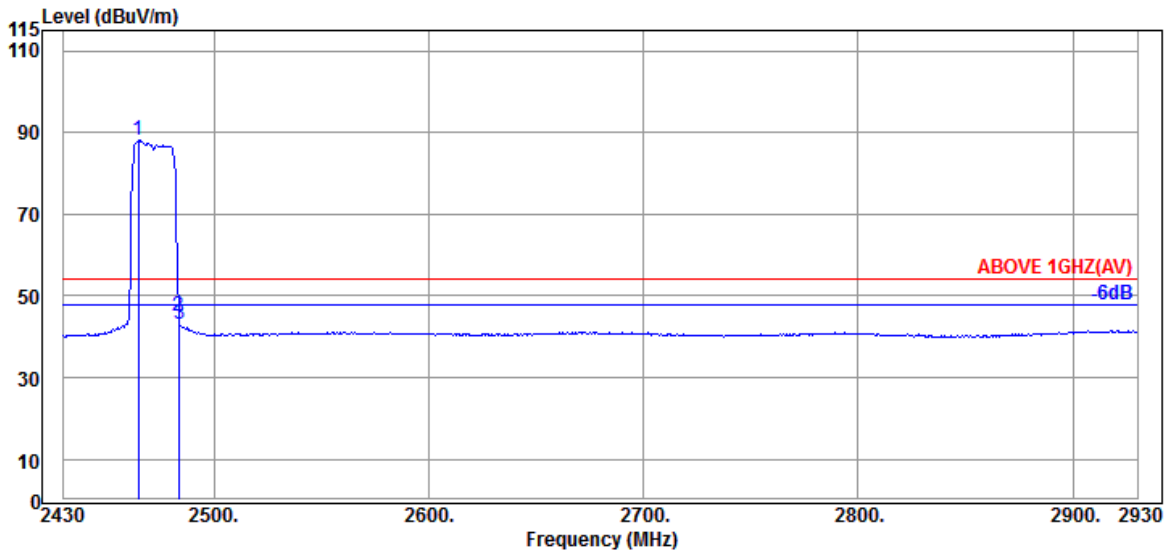


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	82.27	88.00	---	---	Average
2483.500	32.30	7.99	34.55	39.37	45.11	54.00	8.89	Average
2484.000	32.30	7.99	34.55	37.18	42.92	54.00	11.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

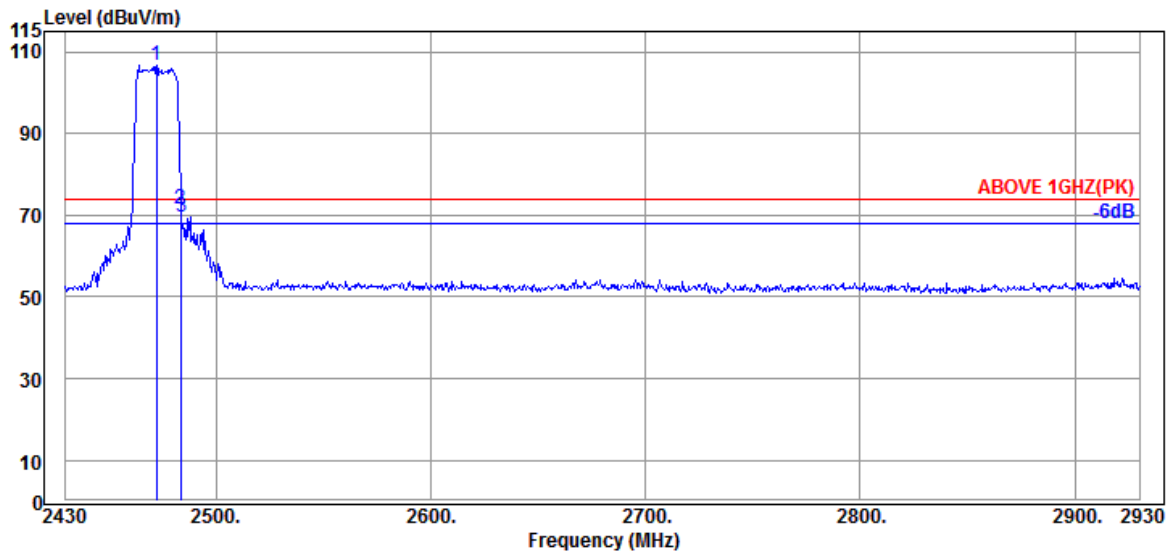

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.500	32.30	7.99	34.55	101.00	106.74	---	---	Peak
2483.500	32.30	7.99	34.55	65.88	71.62	74.00	2.38	Peak
2484.000	32.30	7.99	34.55	63.94	69.68	74.00	4.32	Peak

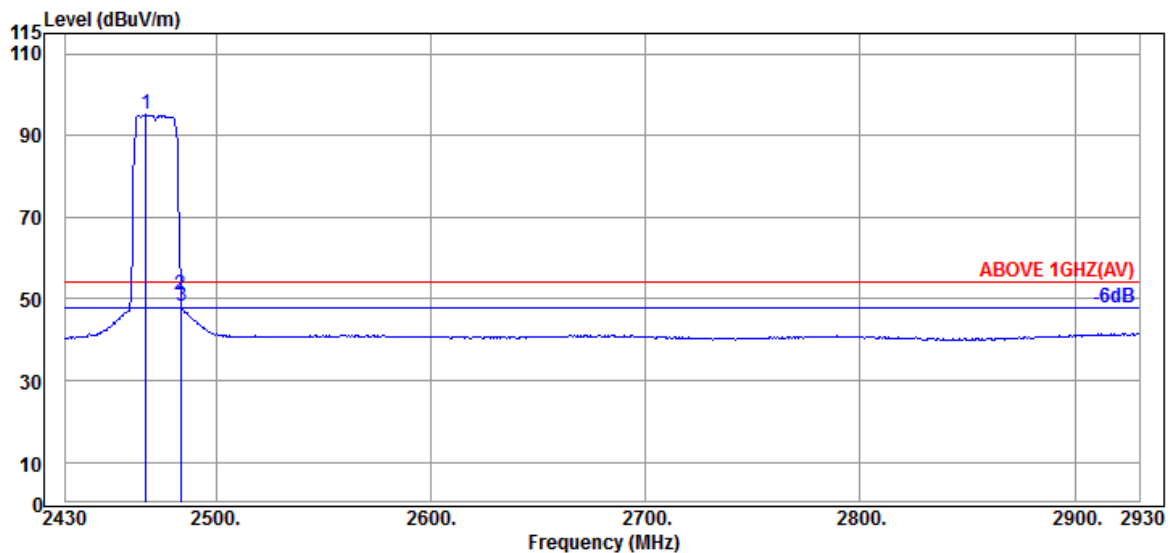


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	89.33	95.06	---	---	Average
2483.500	32.30	7.99	34.55	45.16	50.90	54.00	3.10	Average
2484.000	32.30	7.99	34.55	42.37	48.11	54.00	5.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

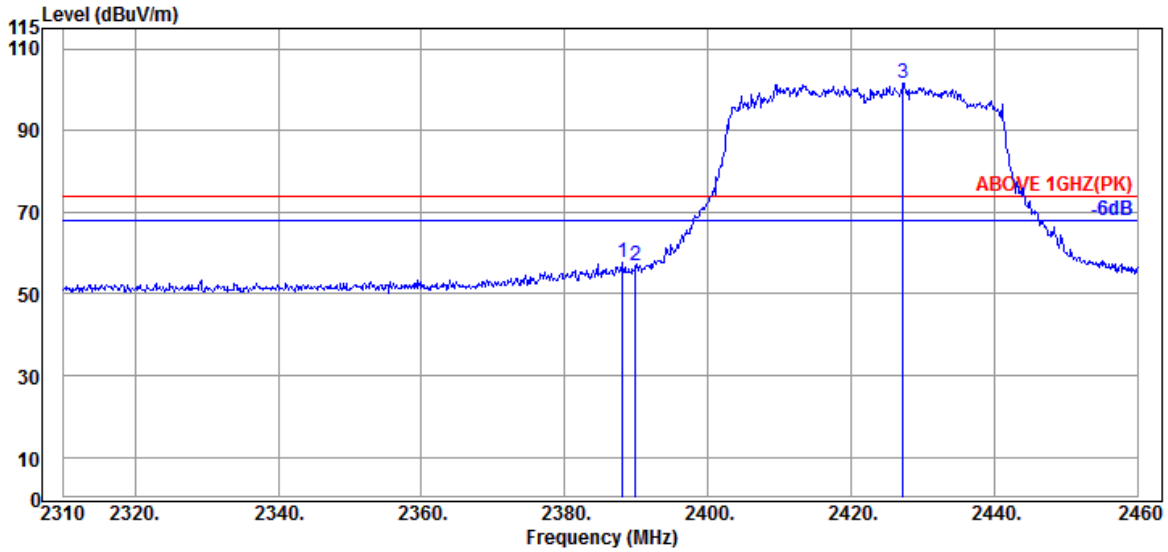

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.150	31.89	7.95	34.53	52.54	57.85	74.00	16.15	Peak
2389.950	31.89	7.95	34.54	51.54	56.84	74.00	17.16	Peak
@ 2427.300	32.09	7.97	34.54	96.16	101.68	---	---	Peak

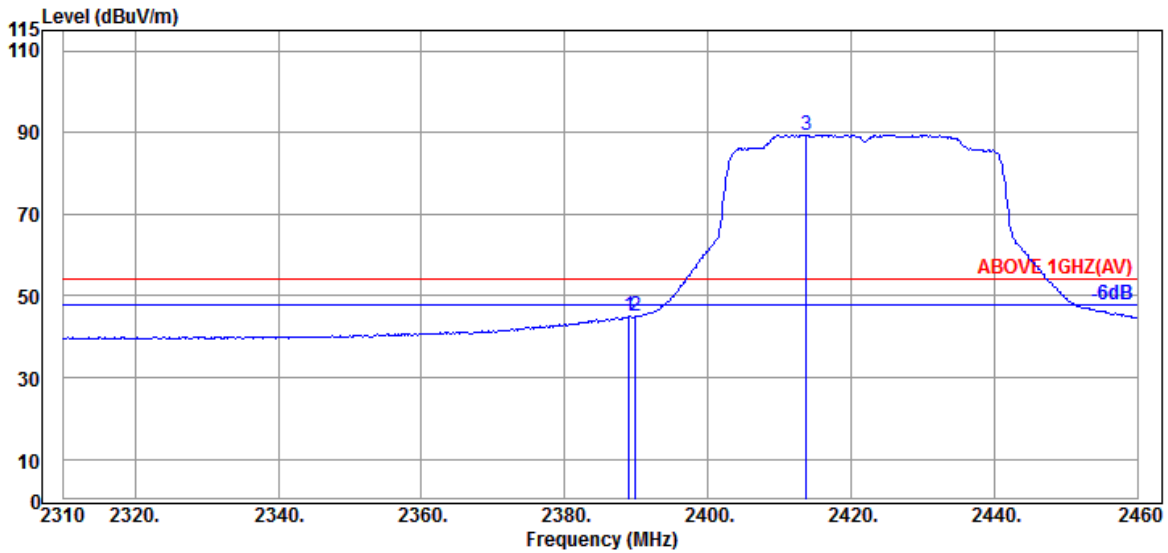


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	31.89	7.95	34.53	39.69	45.00	54.00	9.00	Average
2389.950	31.89	7.95	34.54	39.71	45.01	54.00	8.99	Average
@ 2413.800	31.94	7.96	34.54	84.08	89.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

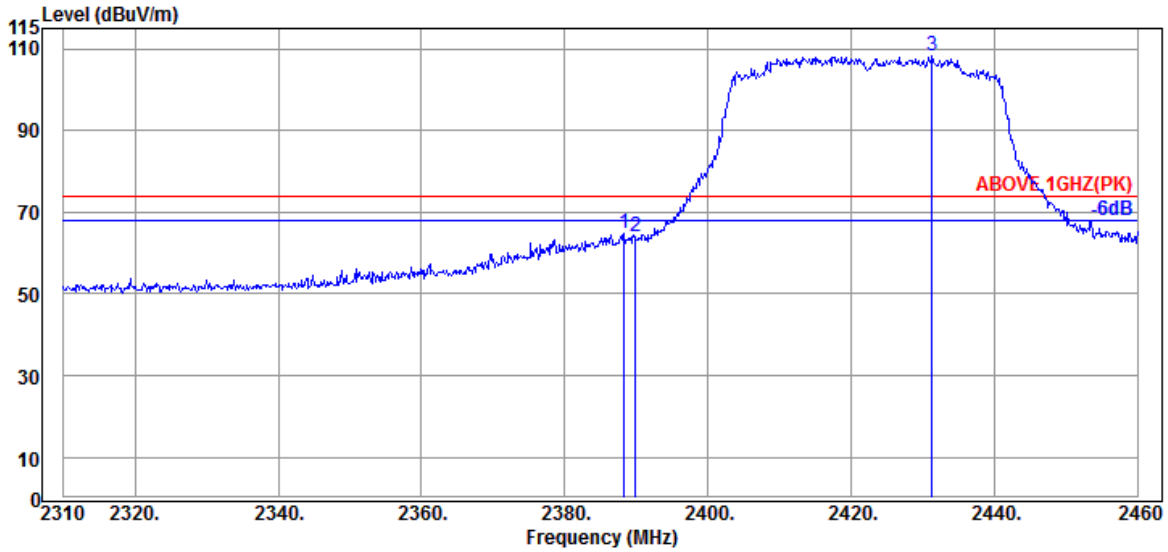

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	31.89	7.95	34.53	59.51	64.82	74.00	9.18	Peak
2389.950	31.89	7.95	34.54	58.79	64.09	74.00	9.91	Peak
@ 2431.350	32.09	7.97	34.54	102.62	108.14	---	---	Peak

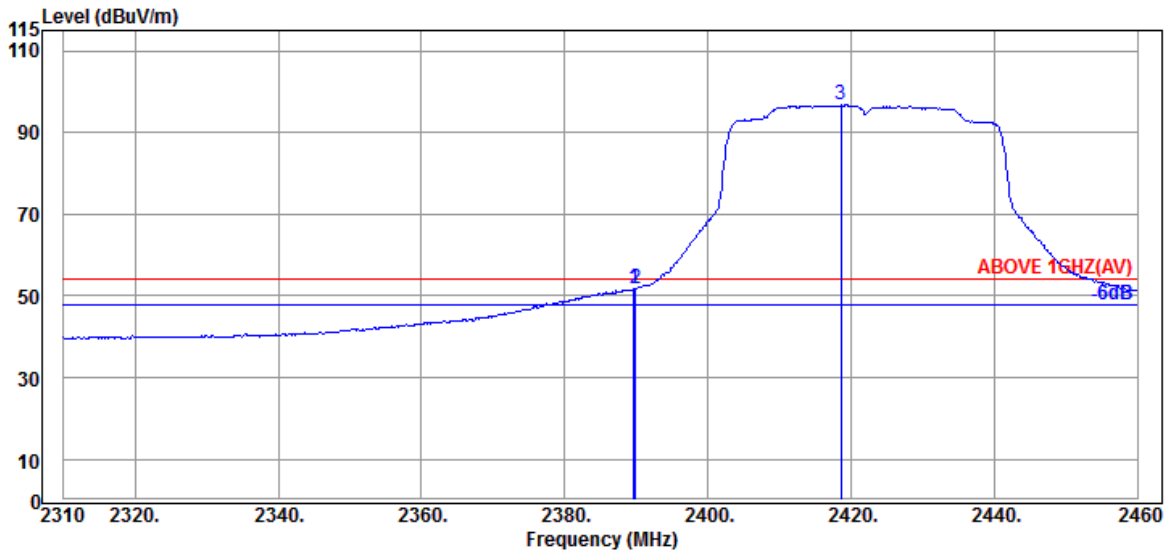


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	46.49	51.80	54.00	2.20	Average
2389.950	31.89	7.95	34.54	46.49	51.79	54.00	2.21	Average
@ 2418.600	32.01	7.96	34.54	91.36	96.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

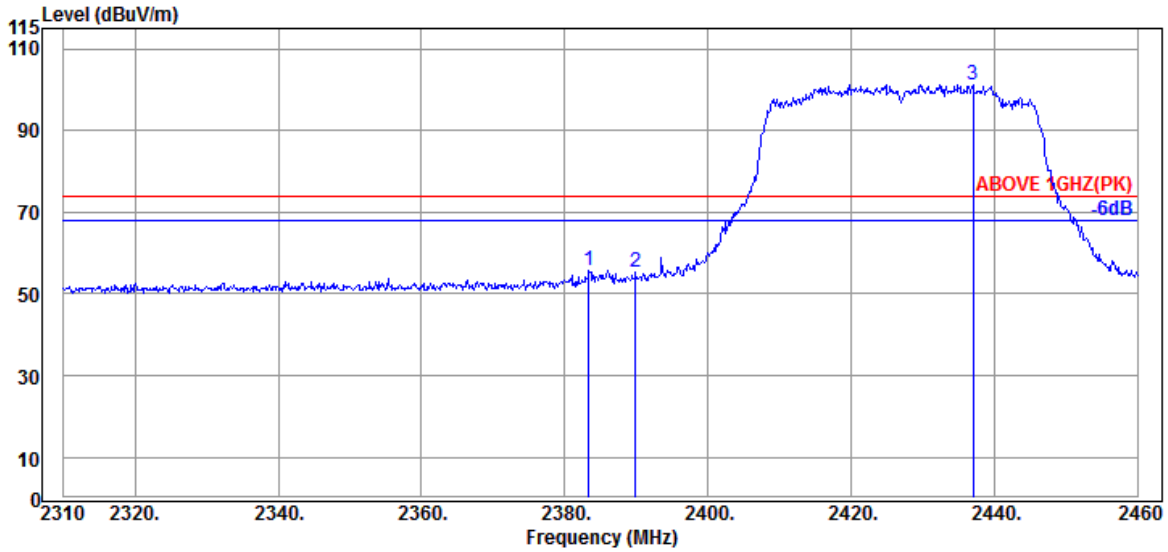

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.350	31.93	7.95	34.53	50.56	55.91	74.00	18.09	Peak
2389.950	31.89	7.95	34.54	50.10	55.40	74.00	18.60	Peak
@ 2427.050	32.16	7.97	34.54	95.58	101.17	---	---	Peak

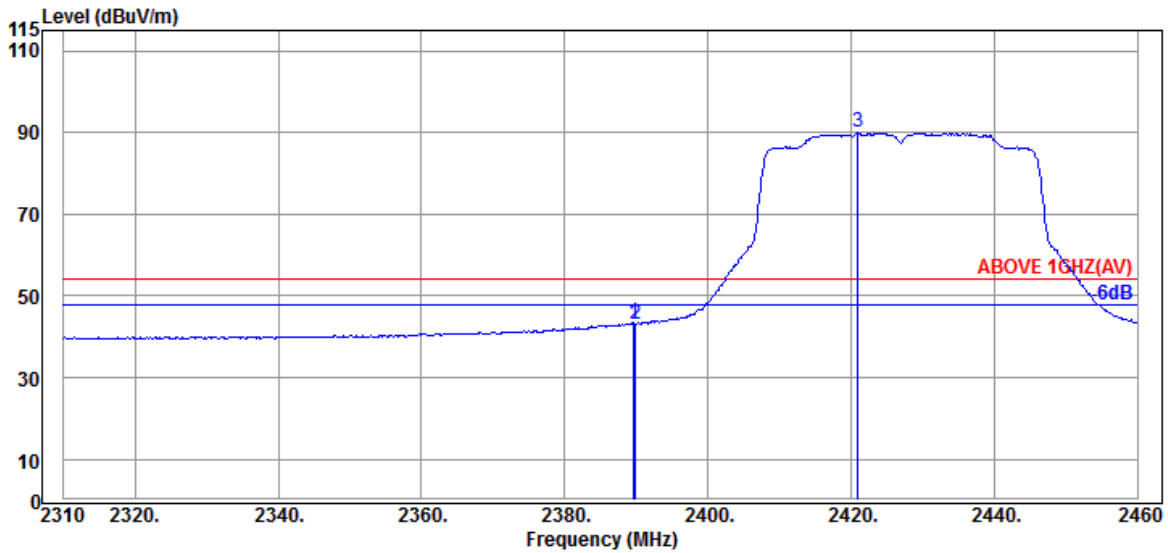


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	38.09	43.40	54.00	10.60	Average
2389.950	31.89	7.95	34.54	37.81	43.11	54.00	10.89	Average
@ 2421.000	32.01	7.96	34.54	84.58	90.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

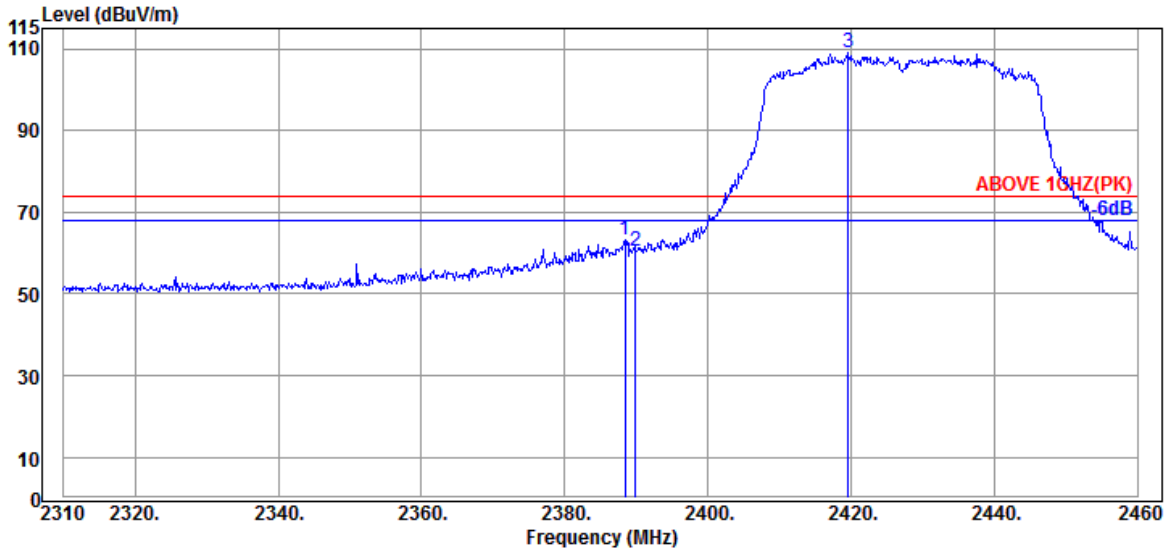

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.450	31.89	7.95	34.53	57.78	63.09	74.00	10.91	Peak
2389.950	31.89	7.95	34.54	55.15	60.45	74.00	13.55	Peak
@ 2419.650	32.01	7.96	34.54	103.63	109.06	---	---	Peak

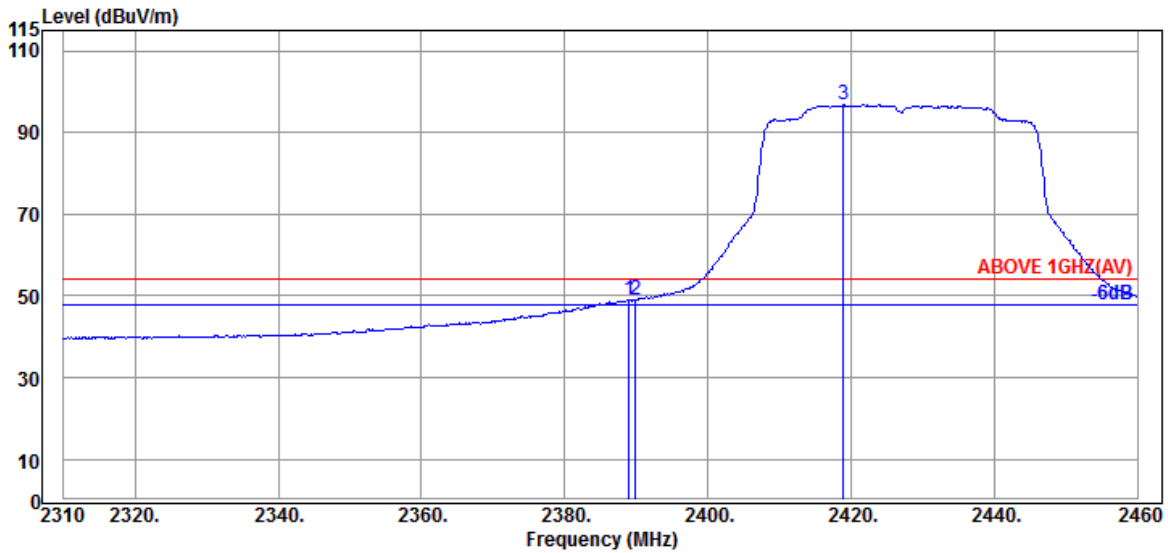


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	31.89	7.95	34.53	43.68	48.99	54.00	5.01	Average
2389.950	31.89	7.95	34.54	43.69	48.99	54.00	5.01	Average
@ 2418.900	32.01	7.96	34.54	91.58	97.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

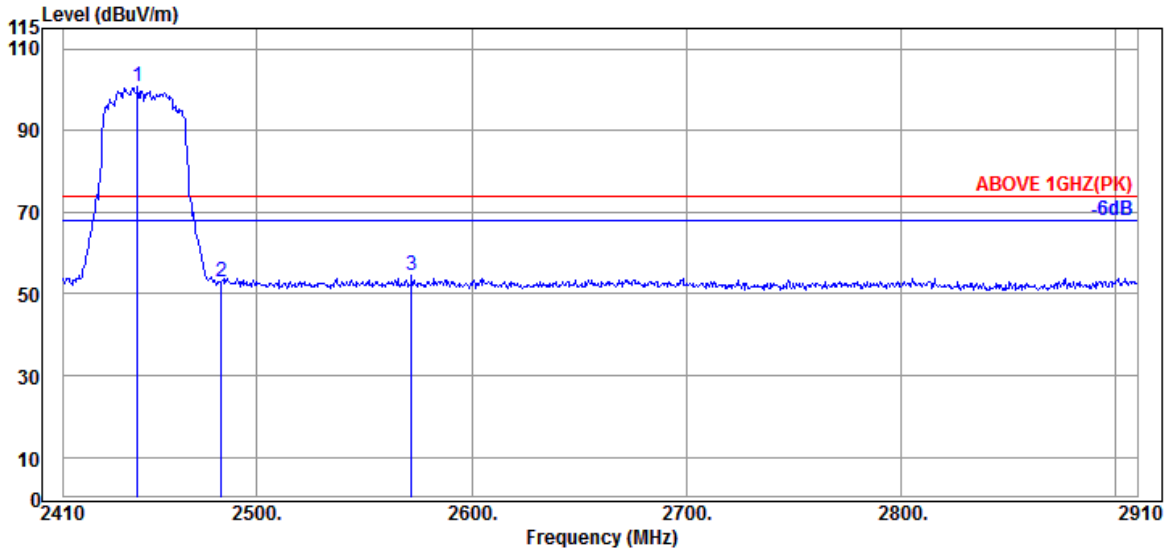

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.500	32.23	7.98	34.55	95.08	100.74	---	---	Peak
2483.500	32.30	7.99	34.55	47.27	53.01	74.00	20.99	Peak
2572.000	32.50	8.04	34.58	48.40	54.36	74.00	19.64	Peak

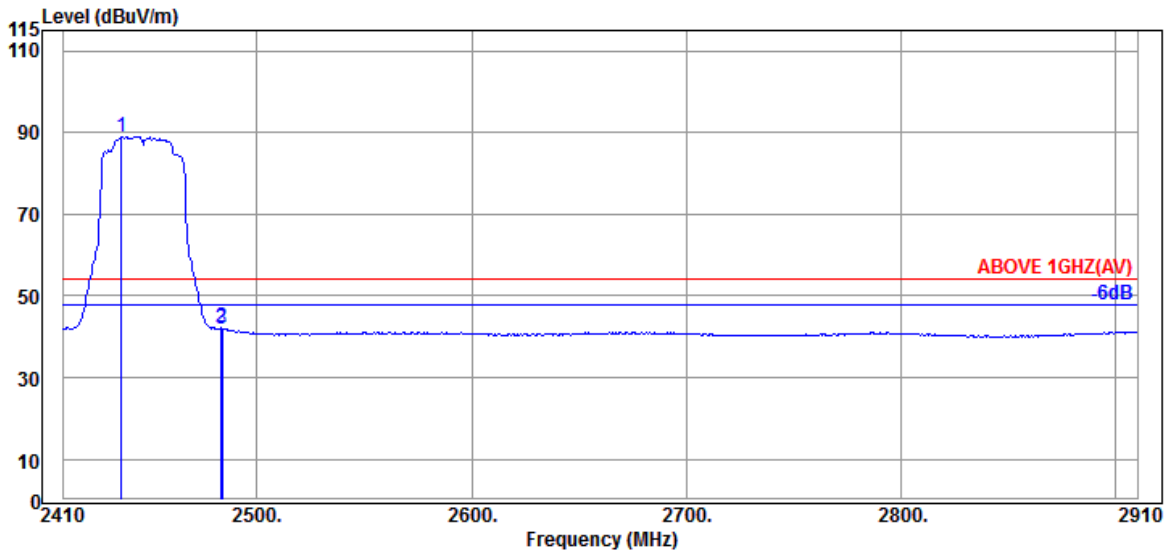


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2437.000	32.16	7.97	34.54	83.41	89.00	---	---	Average
2483.500	32.30	7.99	34.55	36.58	42.32	54.00	11.68	Average
2484.000	32.30	7.99	34.55	36.20	41.94	54.00	12.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

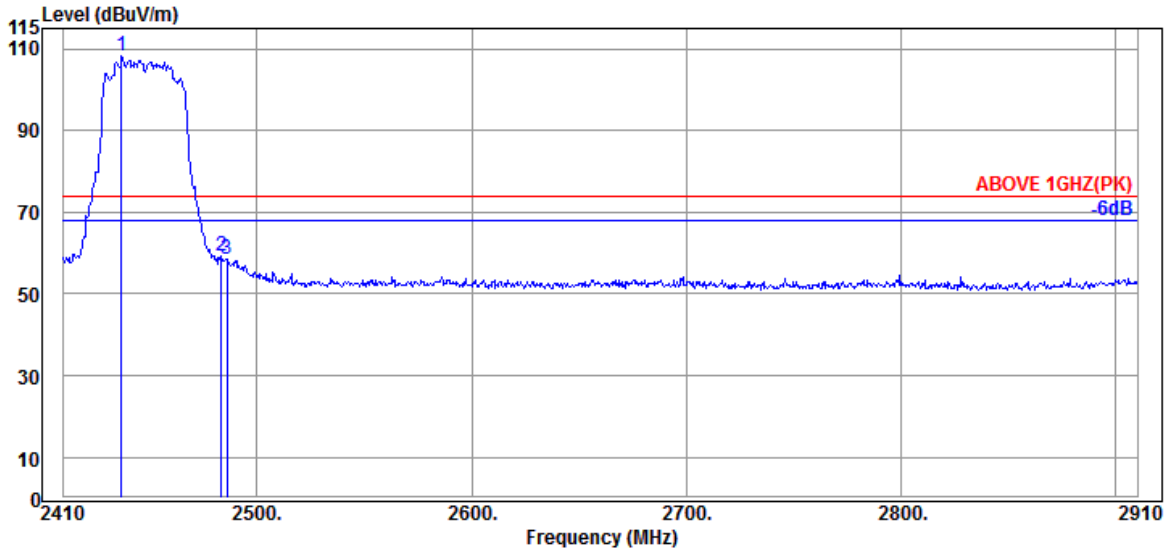

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2437.000	32.16	7.97	34.54	102.53	108.12	---	---	Peak
2483.500	32.30	7.99	34.55	53.54	59.28	74.00	14.72	Peak
2486.000	32.30	8.00	34.55	52.74	58.49	74.00	15.51	Peak

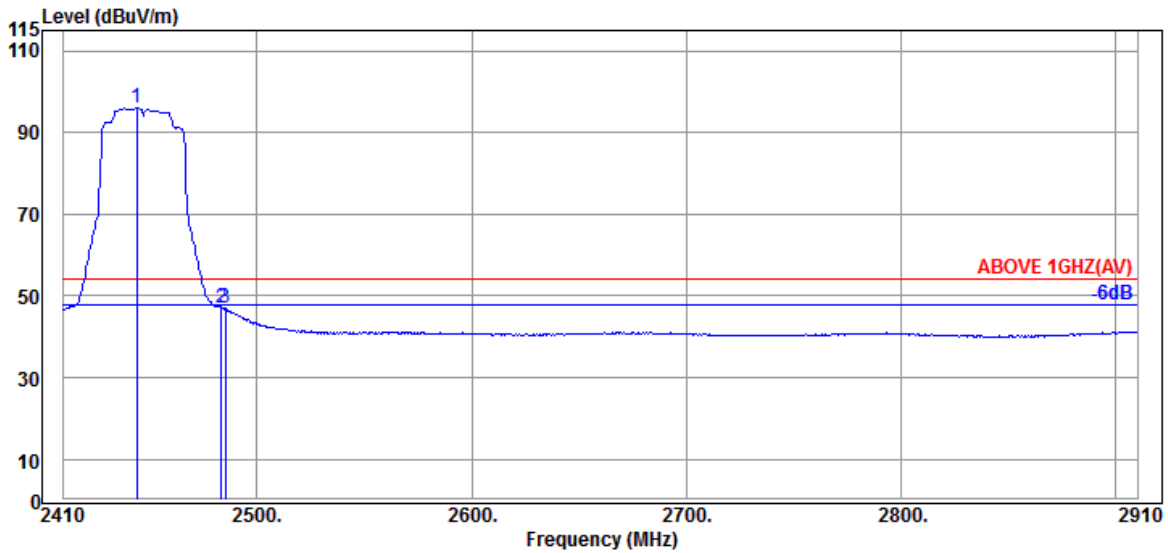


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.000	32.23	7.98	34.55	90.39	96.05	---	---	Average
2483.500	32.30	7.99	34.55	41.14	46.88	54.00	7.12	Average
2485.500	32.30	7.99	34.55	41.25	46.99	54.00	7.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

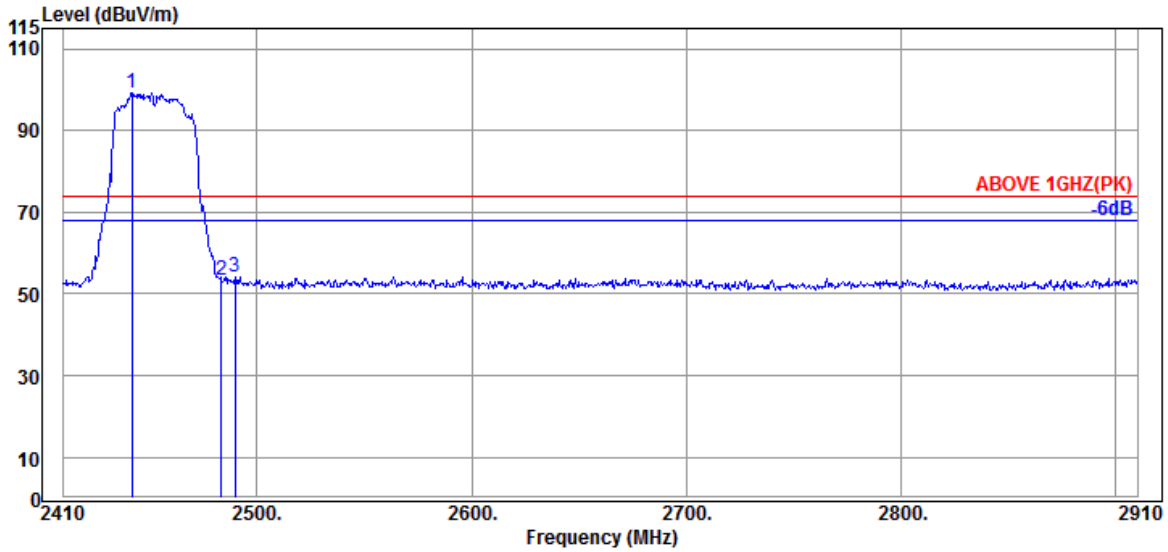

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2442.000	32.23	7.98	34.55	93.54	99.20	---	---	Peak
	2483.500	32.30	7.99	34.55	47.59	53.33	74.00	20.67	Peak
	2490.000	32.30	8.00	34.55	48.51	54.26	74.00	19.74	Peak

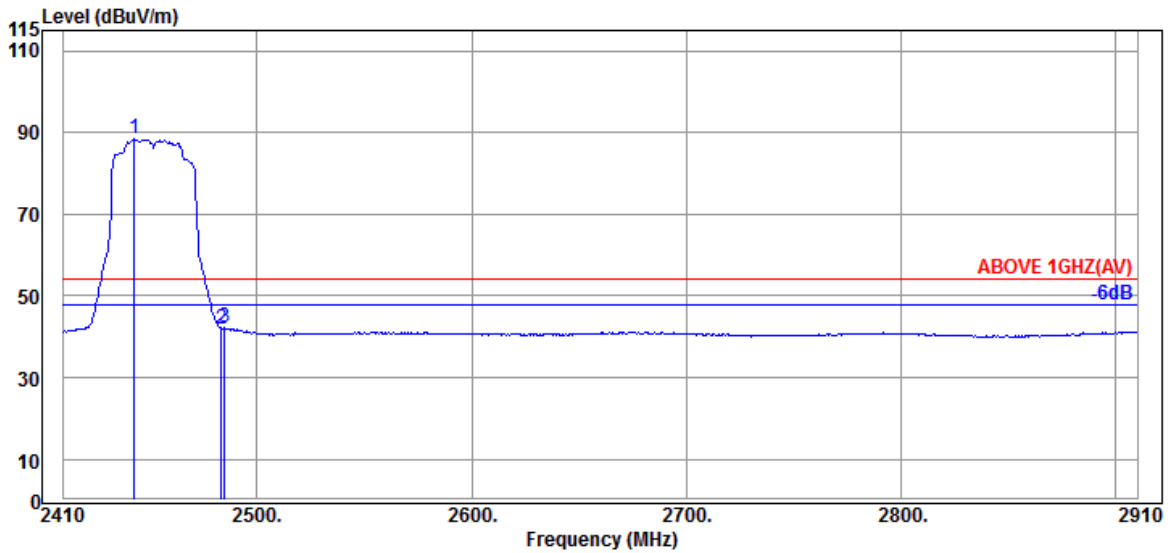


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2443.000	32.23	7.98	34.55	82.68	88.34	---	---	Average
	2483.500	32.30	7.99	34.55	36.30	42.04	54.00	11.96	Average
	2485.000	32.30	7.99	34.55	36.38	42.12	54.00	11.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

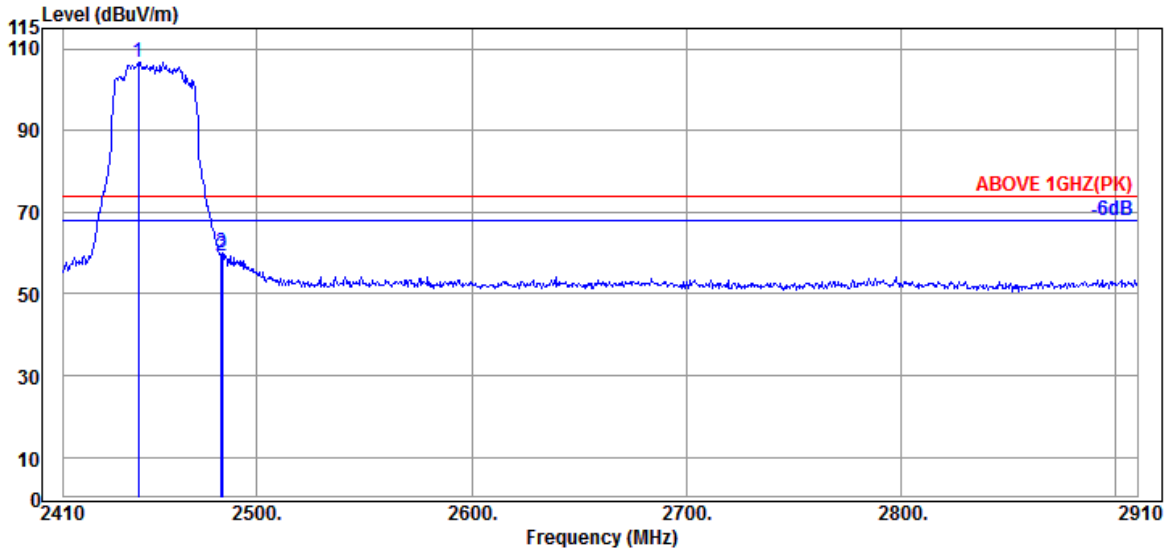

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.000	32.23	7.98	34.55	101.06	106.72	---	---	Peak
2483.500	32.30	7.99	34.55	53.35	59.09	74.00	14.91	Peak
2484.000	32.30	7.99	34.55	54.52	60.26	74.00	13.74	Peak

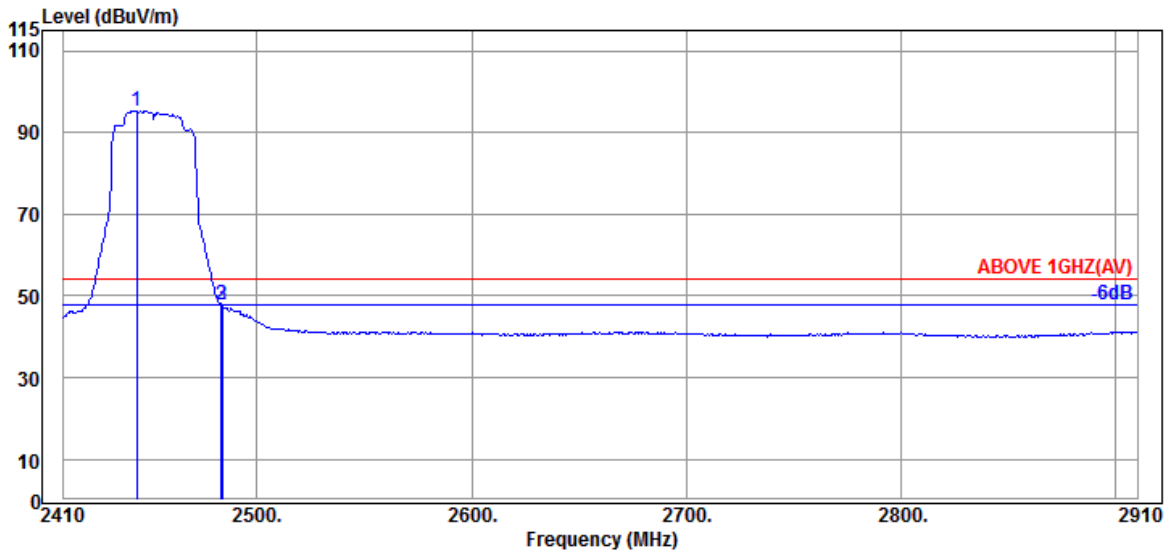


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.000	32.23	7.98	34.55	89.73	95.39	---	---	Average
2483.500	32.30	7.99	34.55	41.92	47.66	54.00	6.34	Average
2484.000	32.30	7.99	34.55	41.88	47.62	54.00	6.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

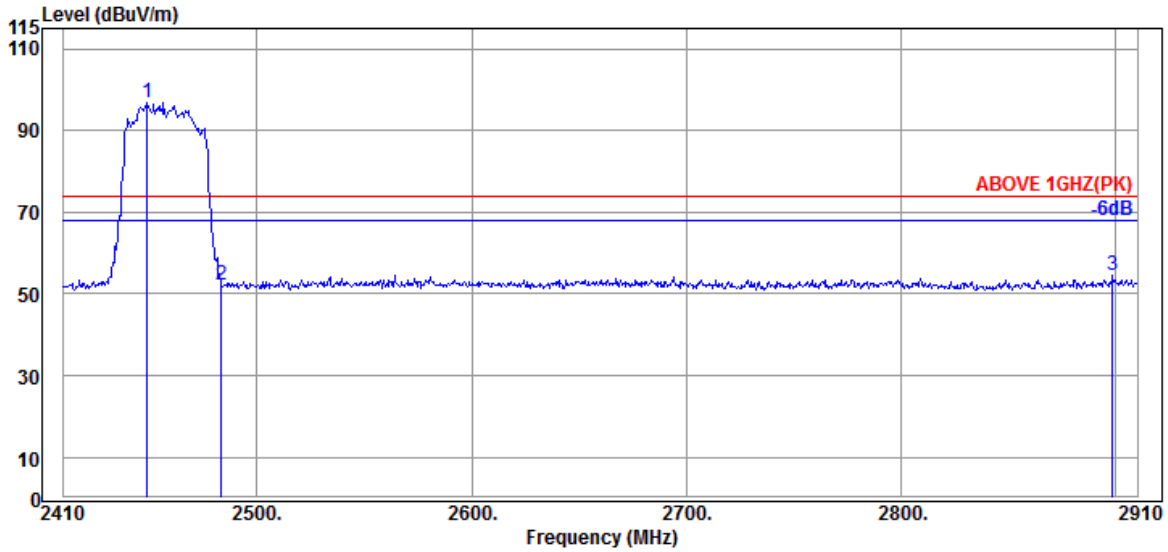

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.000	32.30	7.98	34.55	91.18	96.91	---	---	Peak
2483.500	32.30	7.99	34.55	46.33	52.07	74.00	21.93	Peak
2898.500	32.70	8.18	34.64	48.47	54.71	74.00	19.29	Peak

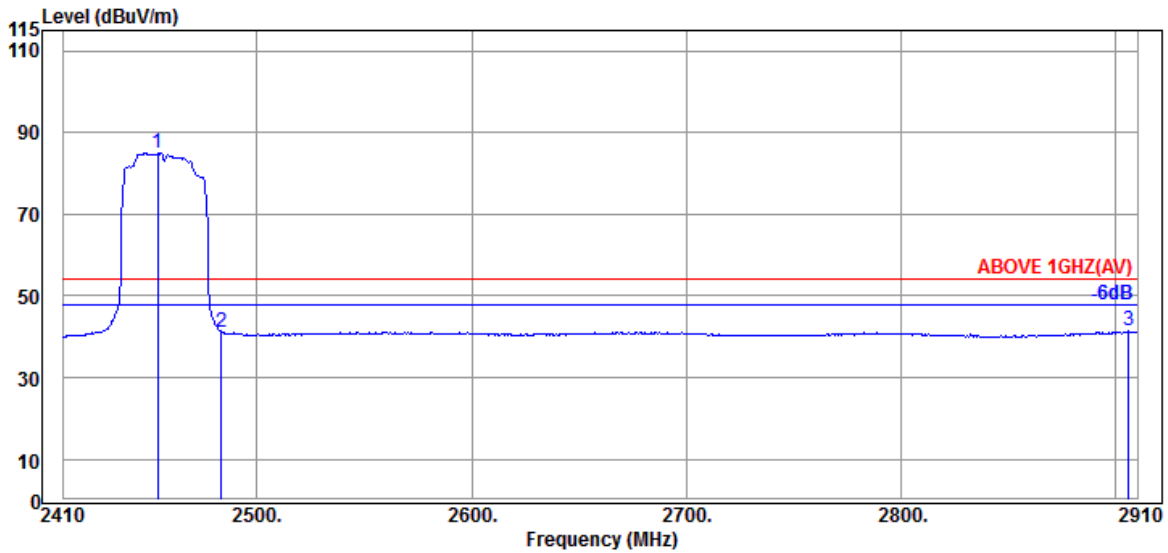


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	32.30	7.98	34.55	79.20	84.93	---	---	Average
2483.500	32.30	7.99	34.55	35.37	41.11	54.00	12.89	Average
2906.000	32.77	8.18	34.64	35.07	41.38	54.00	12.62	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

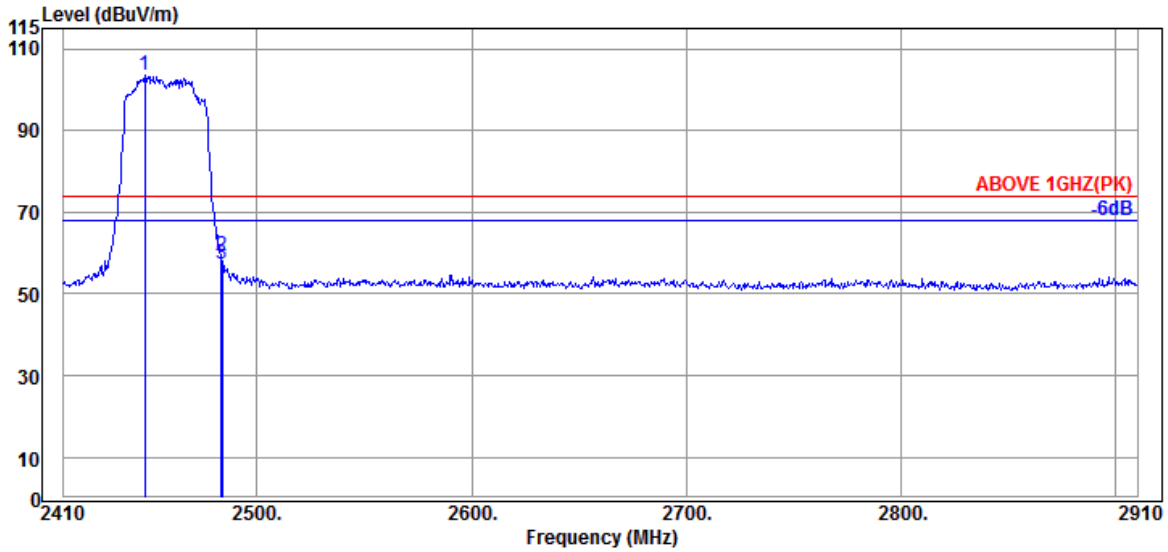

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.000	32.30	7.98	34.55	97.79	103.52	---	---	Peak
2483.500	32.30	7.99	34.55	53.58	59.32	74.00	14.68	Peak
2484.000	32.30	7.99	34.55	51.50	57.24	74.00	16.76	Peak

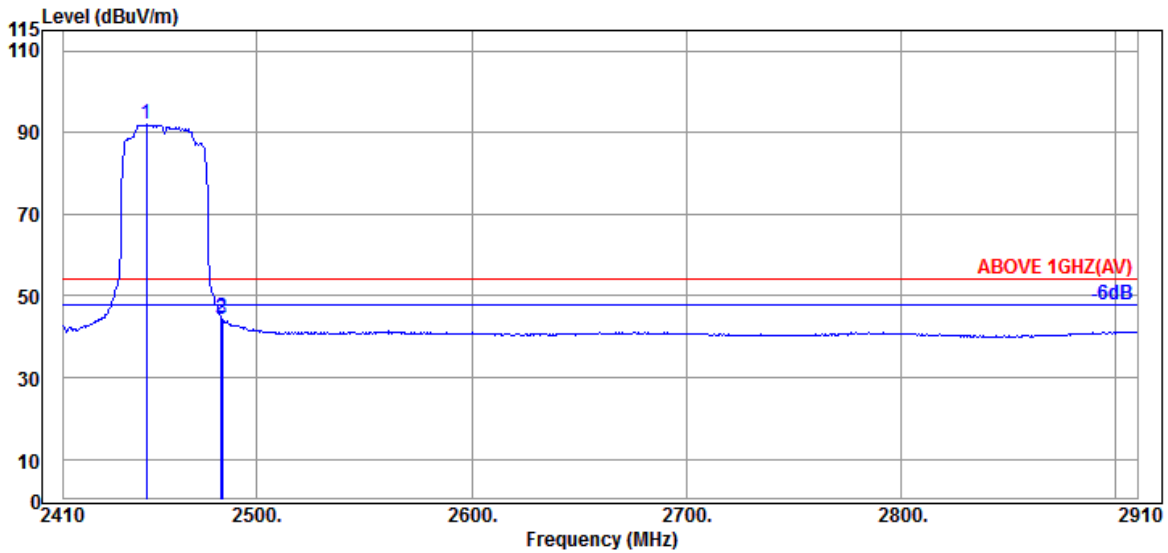


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.500	32.30	7.98	34.55	86.19	91.92	---	---	Average
2483.500	32.30	7.99	34.55	38.97	44.71	54.00	9.29	Average
2484.000	32.30	7.99	34.55	38.58	44.32	54.00	9.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

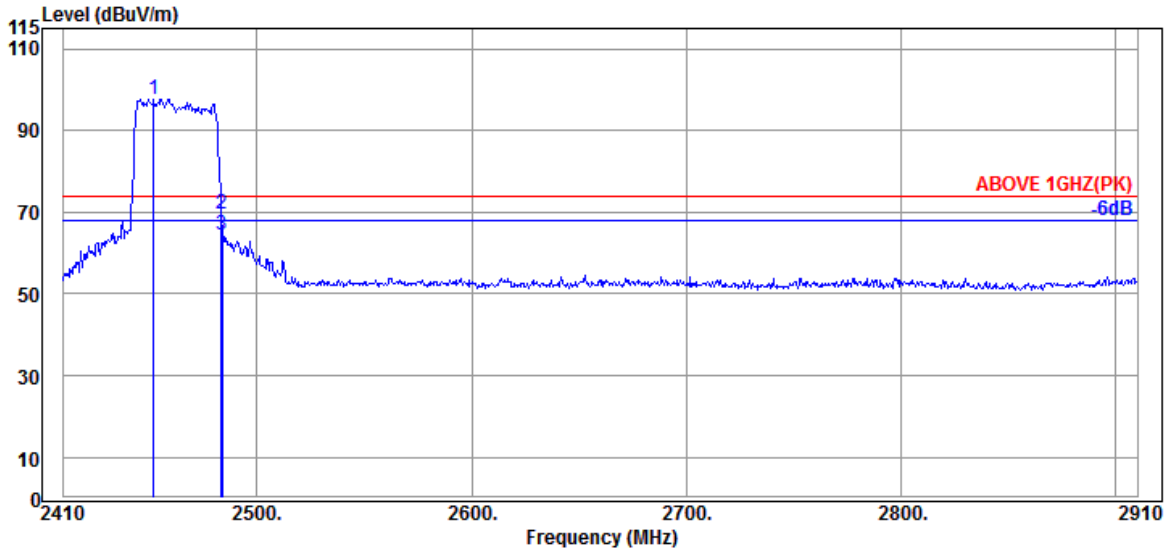

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.000	32.30	7.98	34.55	92.05	97.78	---	---	Peak
2483.500	32.30	7.99	34.55	63.86	69.60	74.00	4.40	Peak
2484.000	32.30	7.99	34.55	58.81	64.55	74.00	9.45	Peak

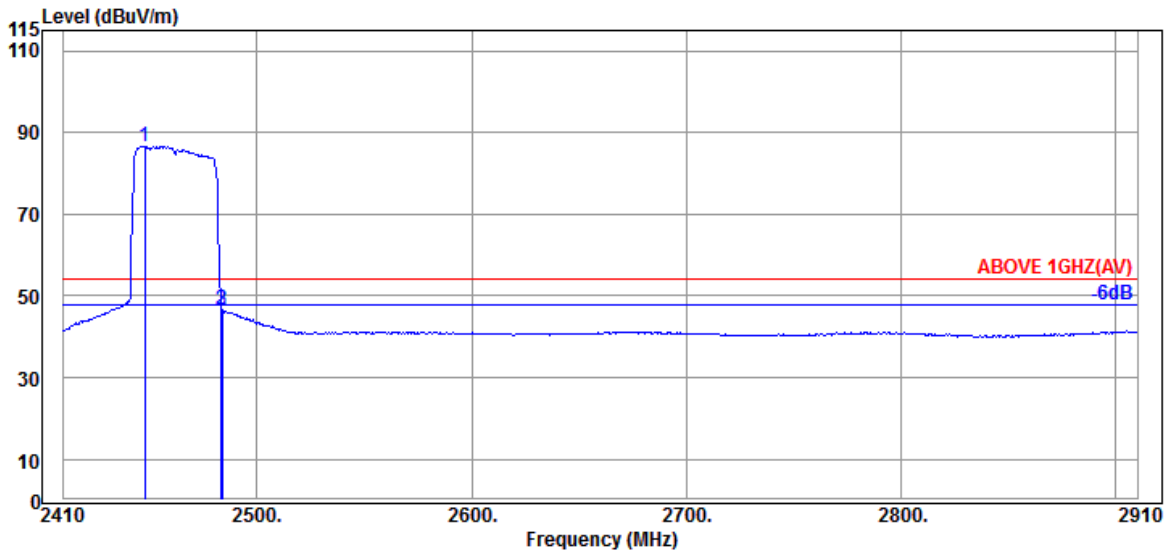


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.000	32.30	7.98	34.55	80.92	86.65	---	---	Average
2483.500	32.30	7.99	34.55	41.03	46.77	54.00	7.23	Average
2484.000	32.30	7.99	34.55	40.80	46.54	54.00	7.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

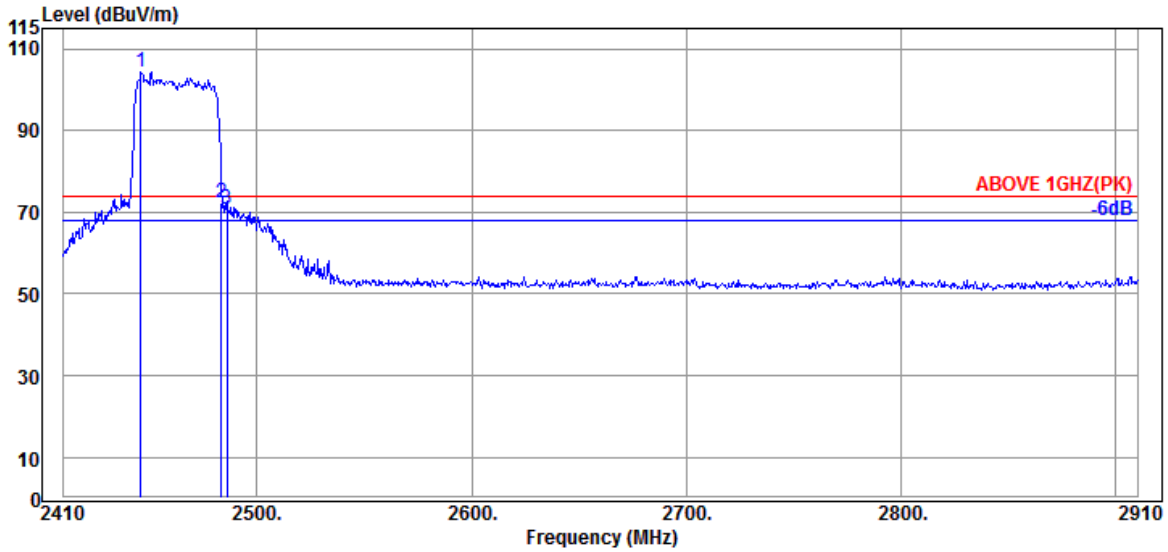

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	32.23	7.98	34.55	98.79	104.45	---	---	Peak
2483.500	32.30	7.99	34.55	66.48	72.22	74.00	1.78	Peak
2486.000	32.30	8.00	34.55	65.02	70.77	74.00	3.23	Peak

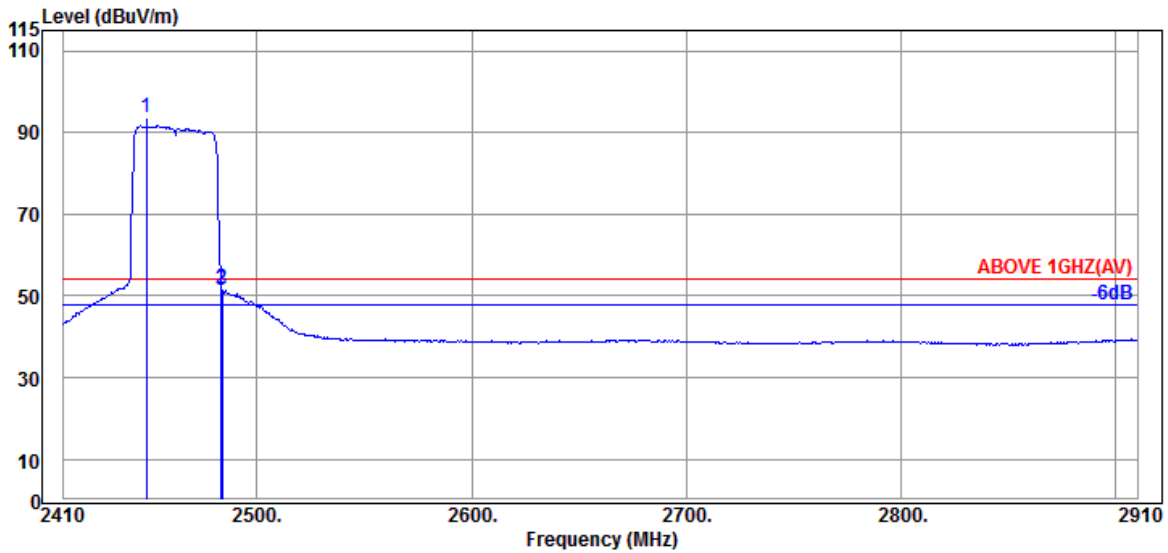


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.500	32.30	7.98	34.55	87.87	93.60	---	---	Average
2483.500	32.30	7.99	34.55	45.93	51.67	54.00	2.33	Average
2484.000	32.30	7.99	34.55	45.72	51.46	54.00	2.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

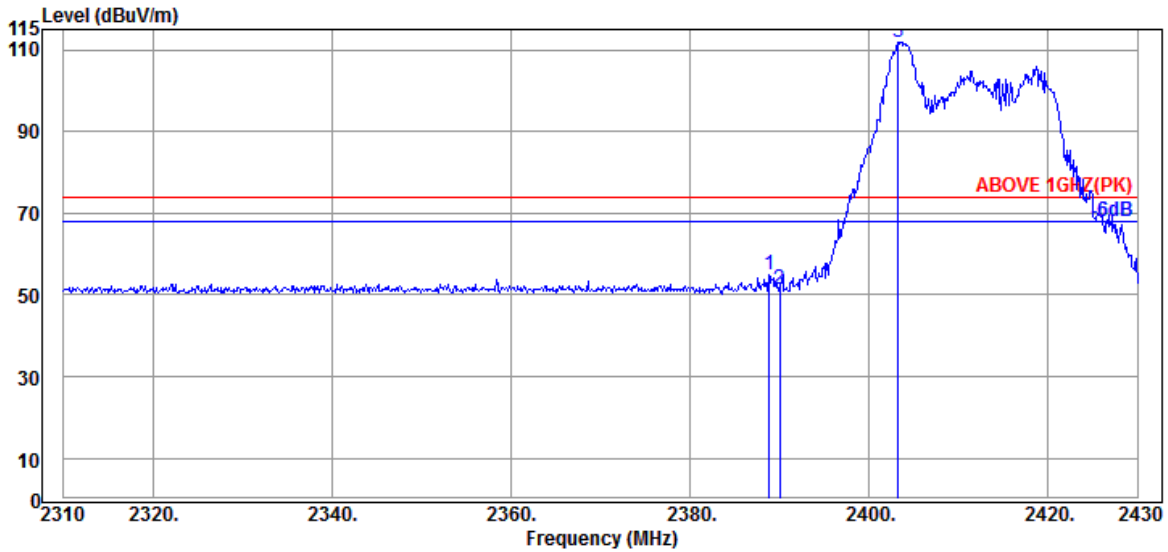

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	31.89	7.95	34.53	49.78	55.09	74.00	18.91	Peak
2390.040	31.89	7.95	34.54	45.92	51.22	74.00	22.78	Peak
@ 2403.240	31.80	7.95	34.54	106.69	111.90	---	---	Peak

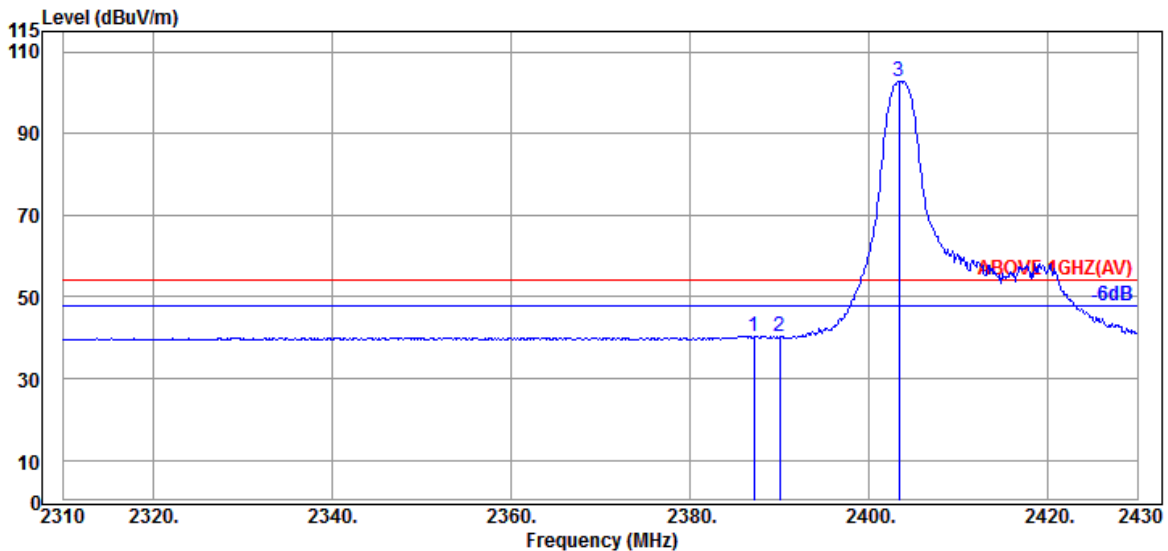


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.160	31.89	7.95	34.53	35.02	40.33	54.00	13.67	Average
2390.040	31.89	7.95	34.54	35.03	40.33	54.00	13.67	Average
@ 2403.360	31.80	7.95	34.54	97.71	102.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

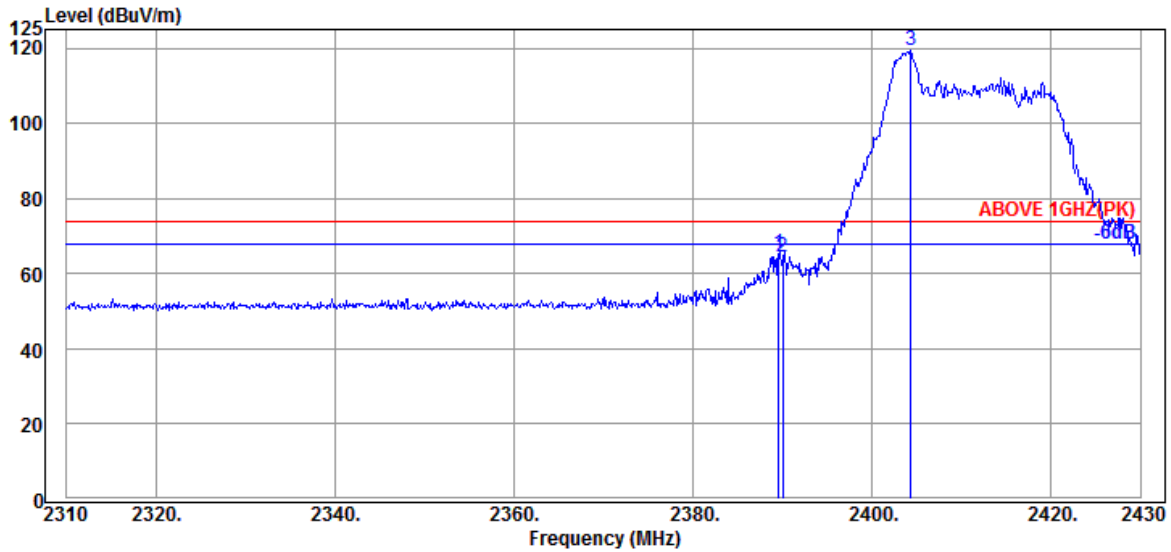

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	59.87	65.18	74.00	8.82	Peak
2390.040	31.89	7.95	34.54	59.30	64.60	74.00	9.40	Peak
@ 2404.320	31.87	7.95	34.54	114.00	119.28	---	---	Peak

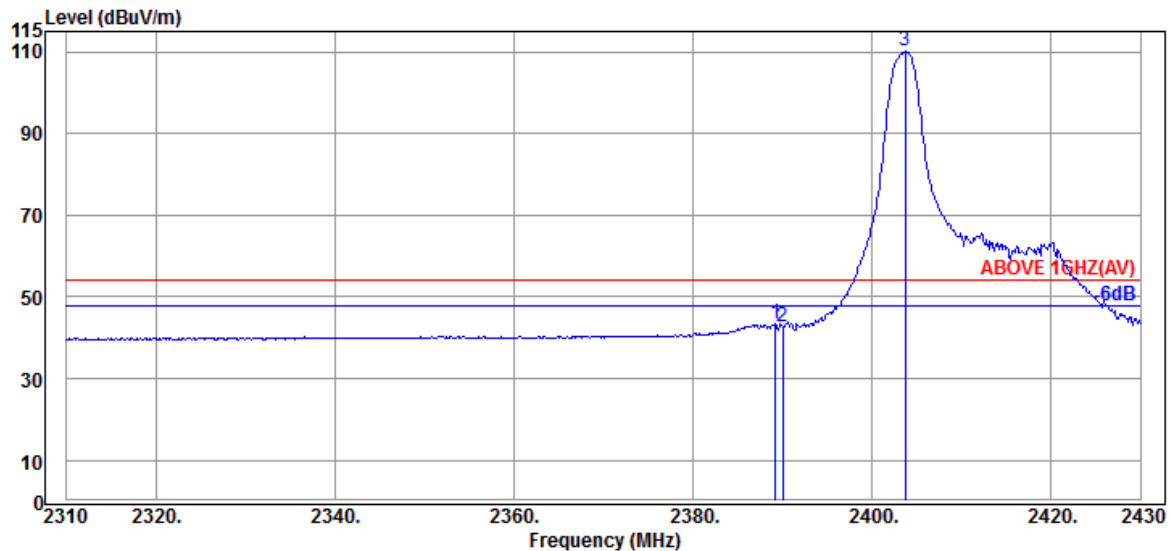


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	38.16	43.47	54.00	10.53	Average
2390.040	31.89	7.95	34.54	37.42	42.72	54.00	11.28	Average
@ 2403.720	31.80	7.95	34.54	104.89	110.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

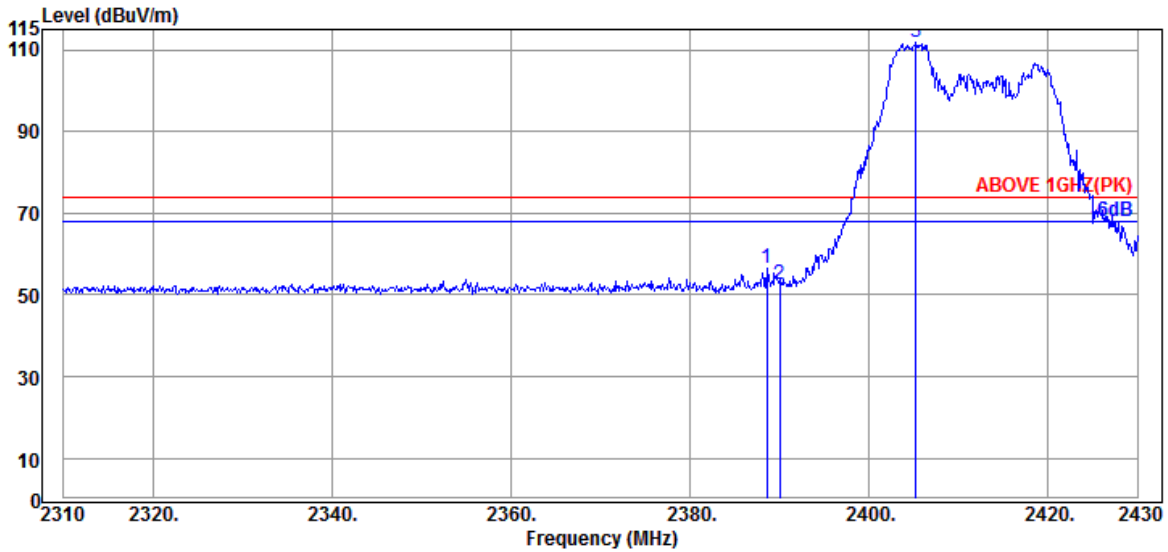

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	31.89	7.95	34.53	51.19	56.50	74.00	17.50	Peak
2390.040	31.89	7.95	34.54	47.08	52.38	74.00	21.62	Peak
@ 2405.280	31.87	7.95	34.54	106.38	111.66	---	---	Peak

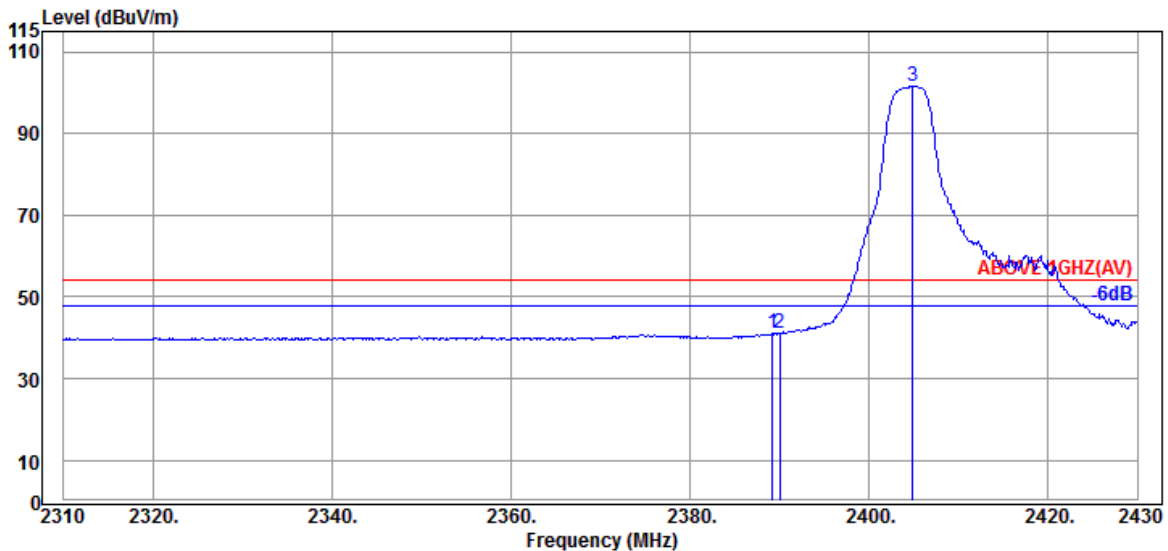


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	35.68	40.99	54.00	13.01	Average
2390.040	31.89	7.95	34.54	35.68	40.98	54.00	13.02	Average
@ 2404.920	31.87	7.95	34.54	96.35	101.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

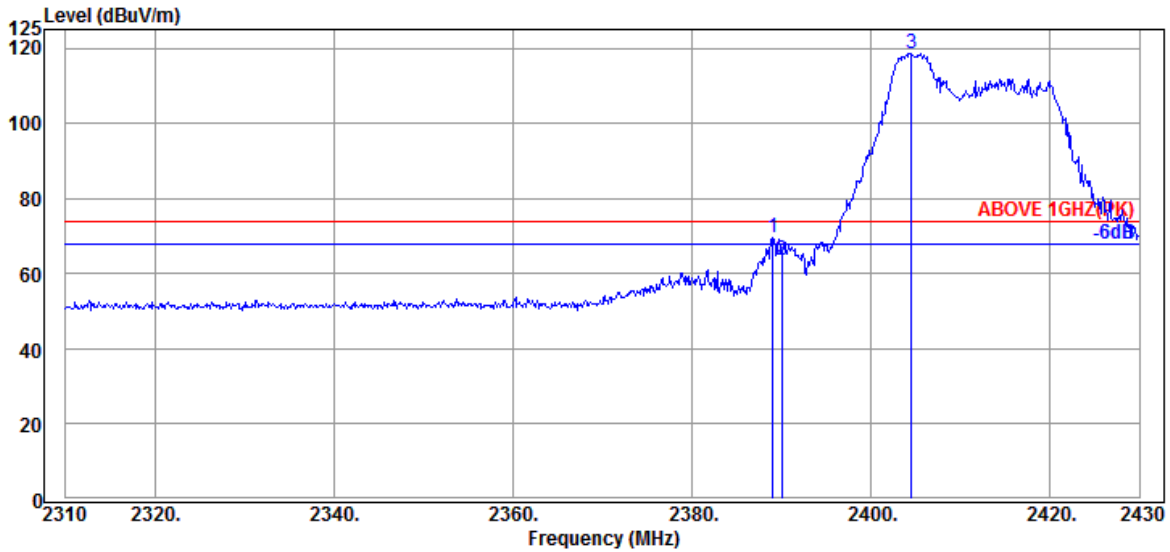

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	31.89	7.95	34.53	64.10	69.41	74.00	4.59	Peak
2390.040	31.89	7.95	34.54	58.19	63.49	74.00	10.51	Peak
@ 2404.560	31.87	7.95	34.54	113.36	118.64	---	---	Peak

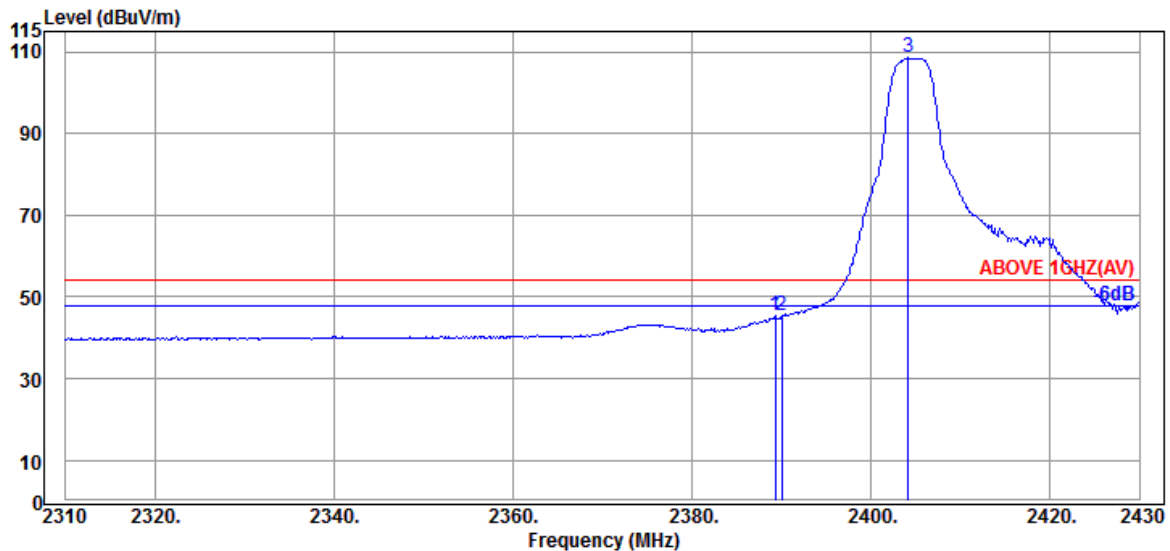


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	31.89	7.95	34.53	39.95	45.26	54.00	8.74	Average
2390.040	31.89	7.95	34.54	39.99	45.29	54.00	8.71	Average
@ 2404.200	31.80	7.95	34.54	103.41	108.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

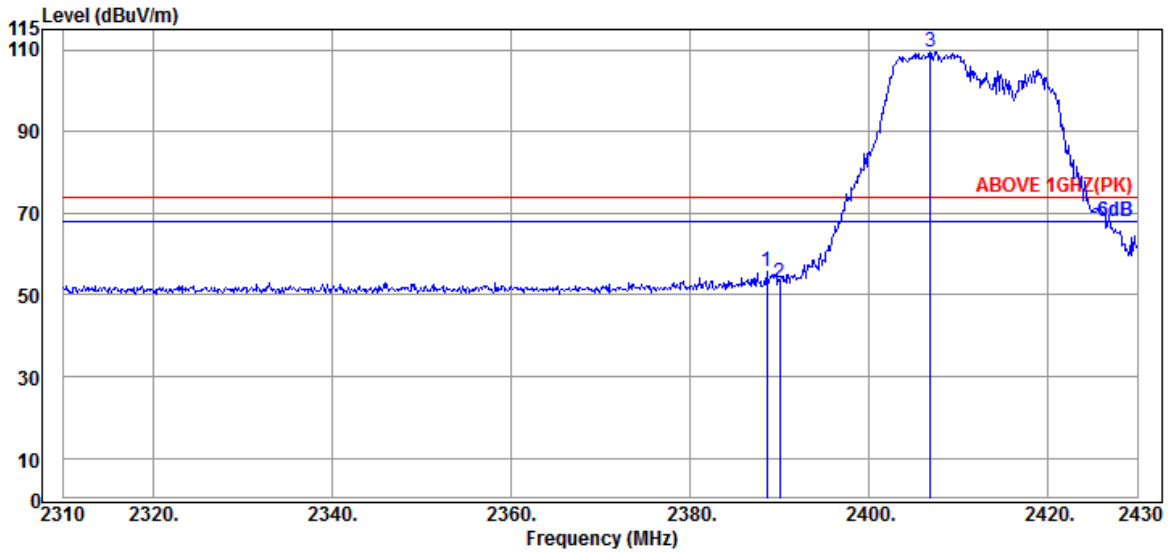

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	31.89	7.95	34.53	50.27	55.58	74.00	18.42	Peak
2390.040	31.89	7.95	34.54	47.48	52.78	74.00	21.22	Peak
@ 2406.840	31.87	7.95	34.54	104.36	109.64	---	---	Peak

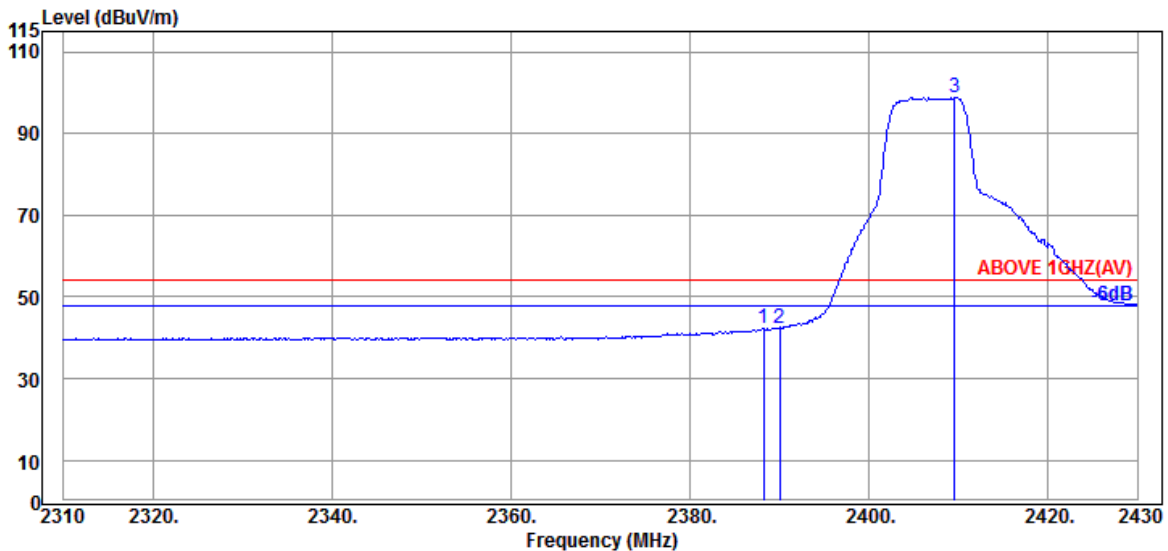


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.240	31.89	7.95	34.53	36.97	42.28	54.00	11.72	Average
2390.040	31.89	7.95	34.54	37.18	42.48	54.00	11.52	Average
@ 2409.600	31.87	7.96	34.54	93.54	98.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

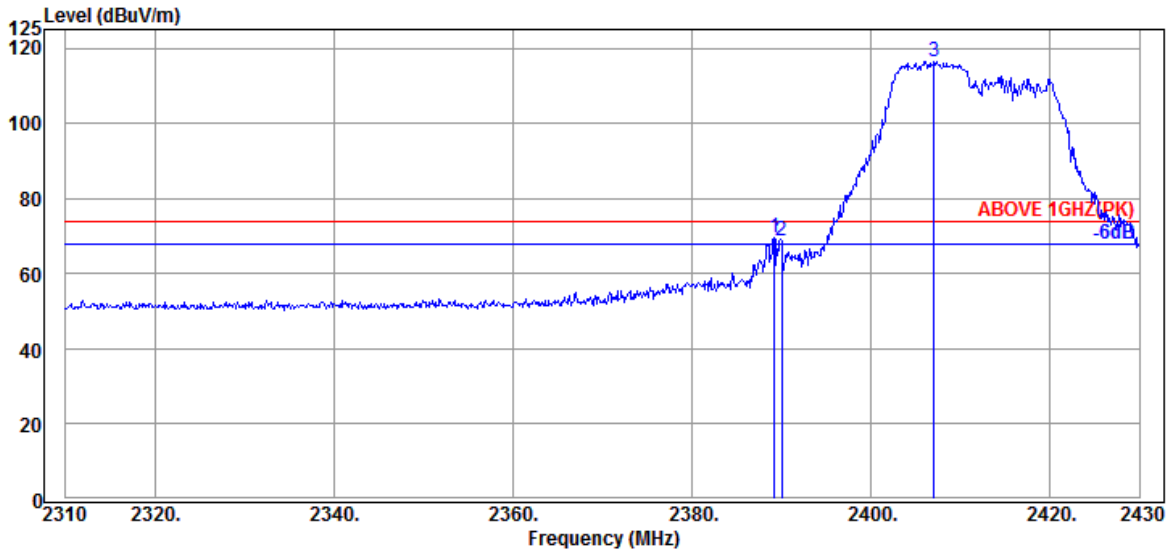

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	64.13	69.44	74.00	4.56	Peak
2390.040	31.89	7.95	34.54	63.63	68.93	74.00	5.07	Peak
@ 2407.080	31.87	7.95	34.54	111.20	116.48	---	---	Peak

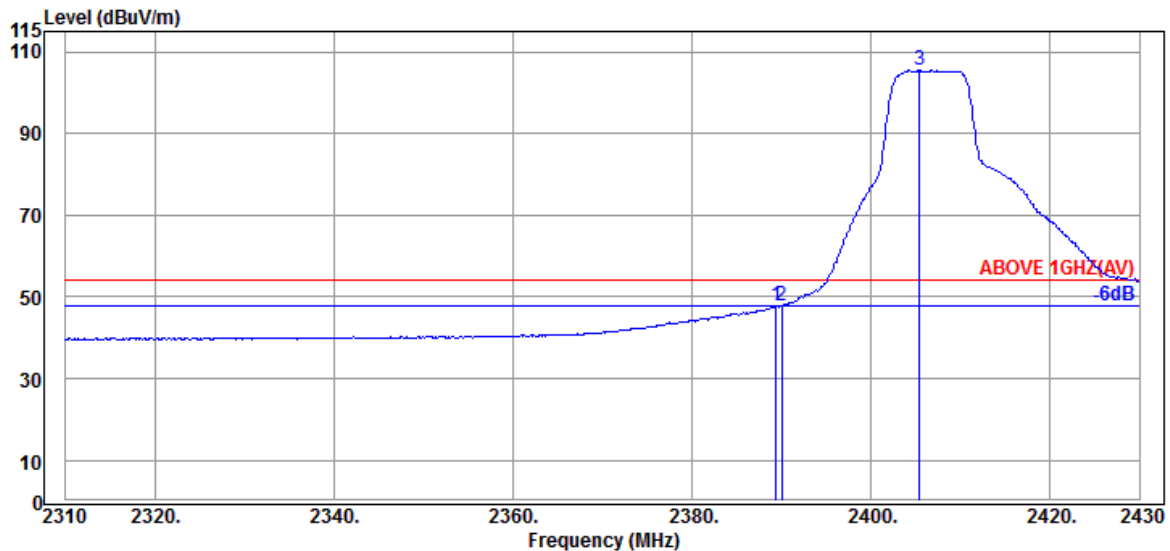


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	42.42	47.73	54.00	6.27	Average
2390.040	31.89	7.95	34.54	42.38	47.68	54.00	6.32	Average
@ 2405.400	31.87	7.95	34.54	100.22	105.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

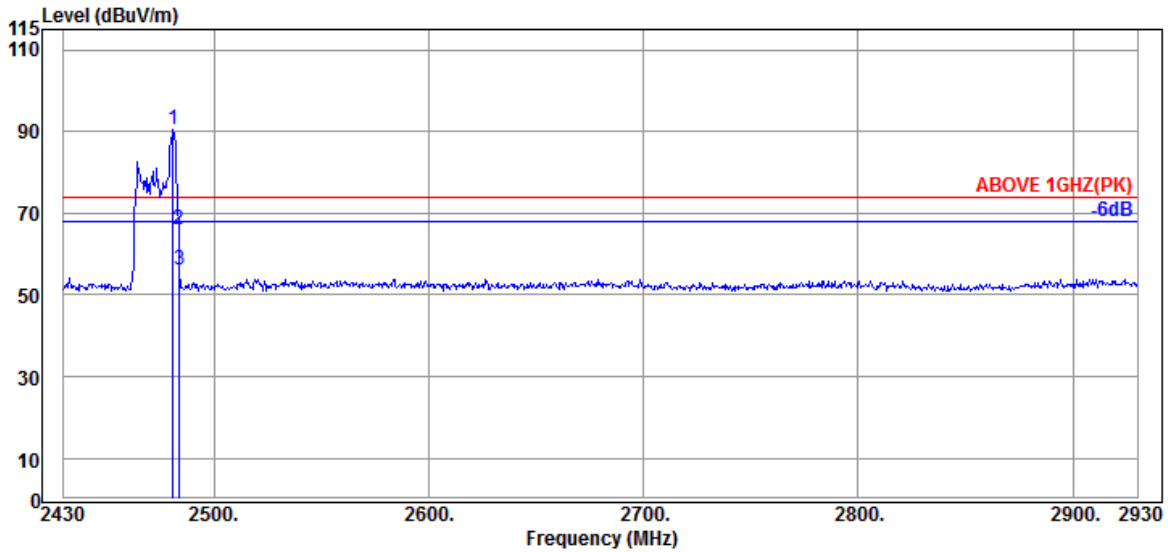

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2481.000	32.30	7.99	34.55	84.69	90.43	---	---	Peak
	2483.500	32.30	7.99	34.55	60.45	66.19	74.00	7.81	Peak
	2484.000	32.30	7.99	34.55	50.53	56.27	74.00	17.73	Peak

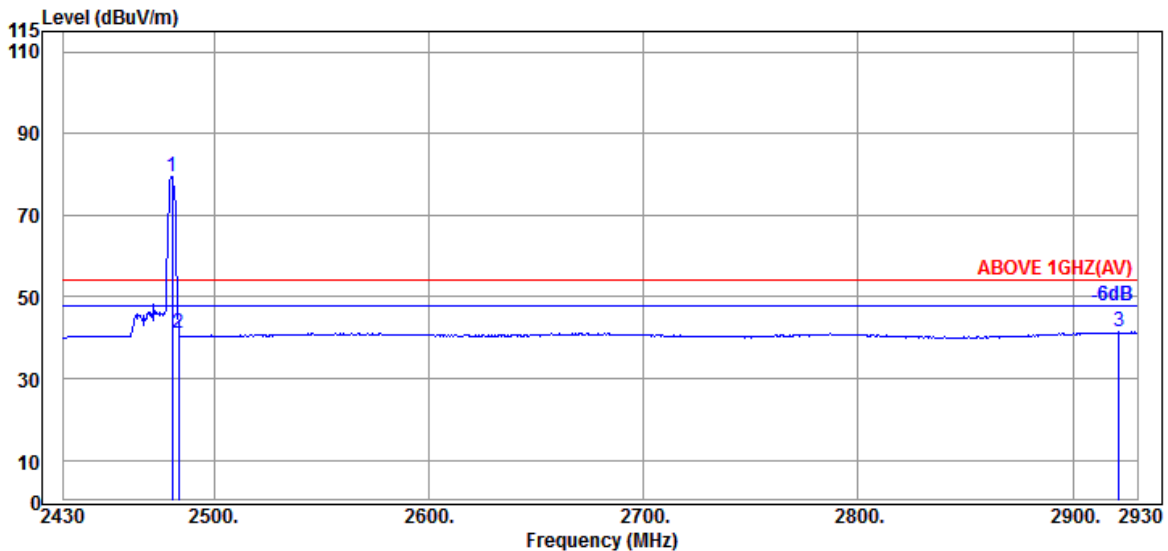


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	32.30	7.99	34.55	73.70	79.44	---	---	Average
	2483.500	32.30	7.99	34.55	35.36	41.10	54.00	12.90	Average
	2921.500	32.90	8.19	34.64	34.88	41.33	54.00	12.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

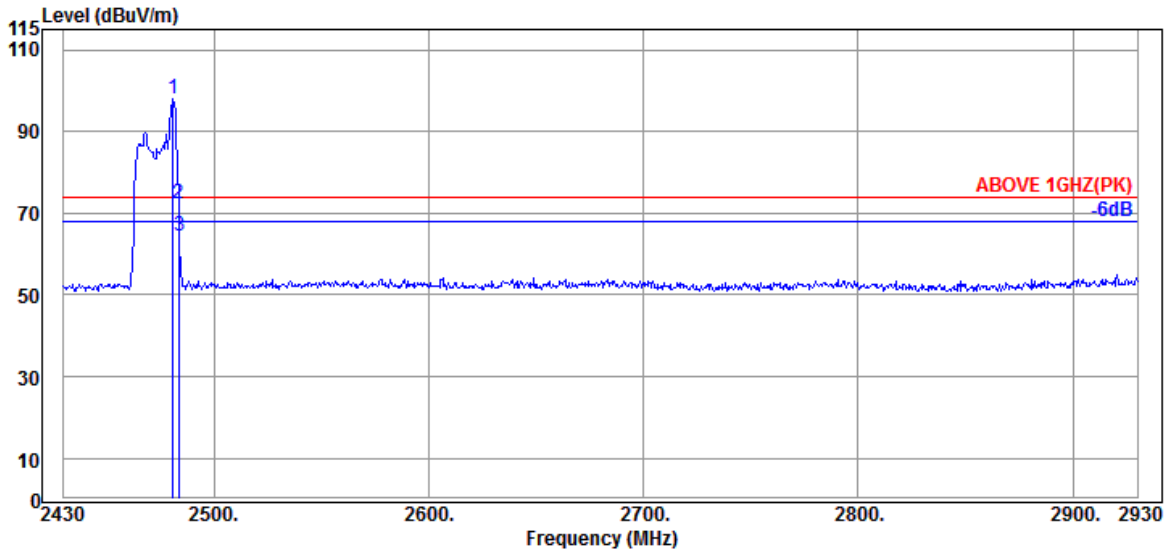

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	92.14	97.88	---	---	Peak
2483.500	32.30	7.99	34.55	66.73	72.47	74.00	1.53	Peak
2484.000	32.30	7.99	34.55	58.80	64.54	74.00	9.46	Peak

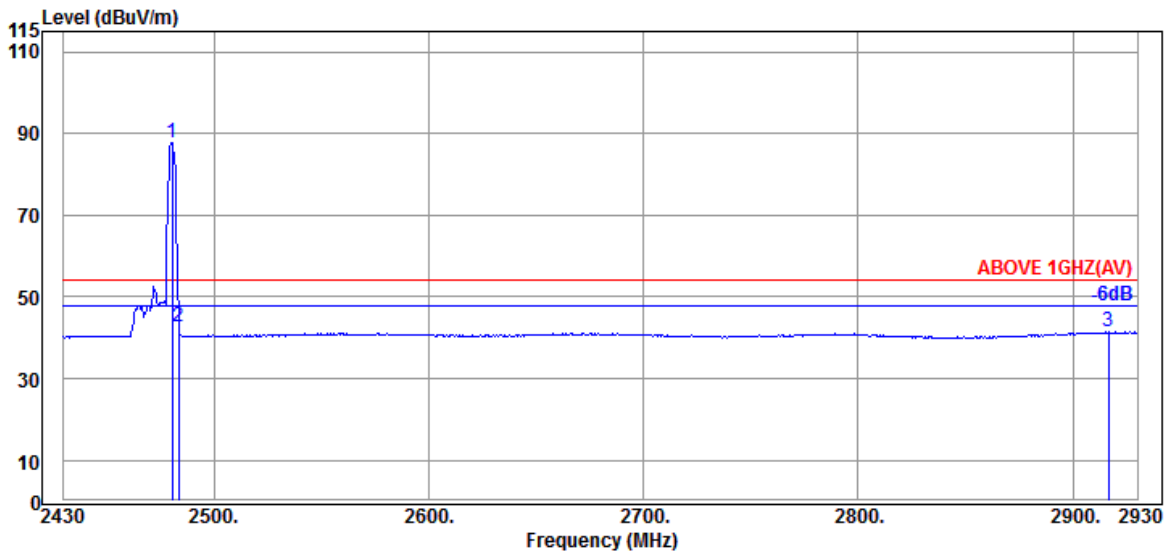


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	81.83	87.57	---	---	Average
2483.500	32.30	7.99	34.55	37.08	42.82	54.00	11.18	Average
2916.500	32.83	8.18	34.64	35.04	41.41	54.00	12.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

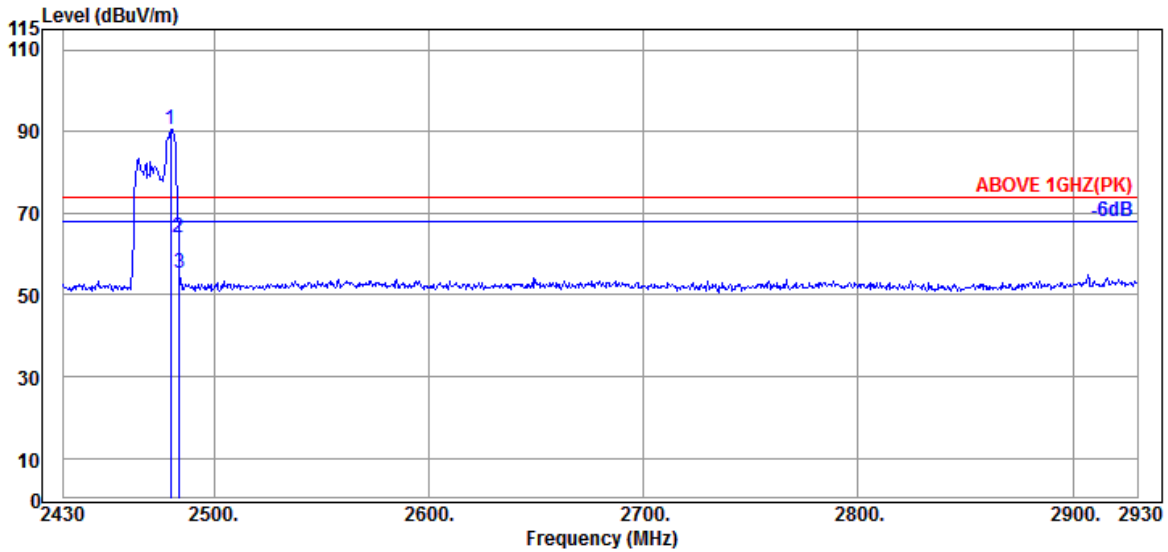

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	84.94	90.68	---	---	Peak
2483.500	32.30	7.99	34.55	58.32	64.06	74.00	9.94	Peak
2484.000	32.30	7.99	34.55	49.41	55.15	74.00	18.85	Peak

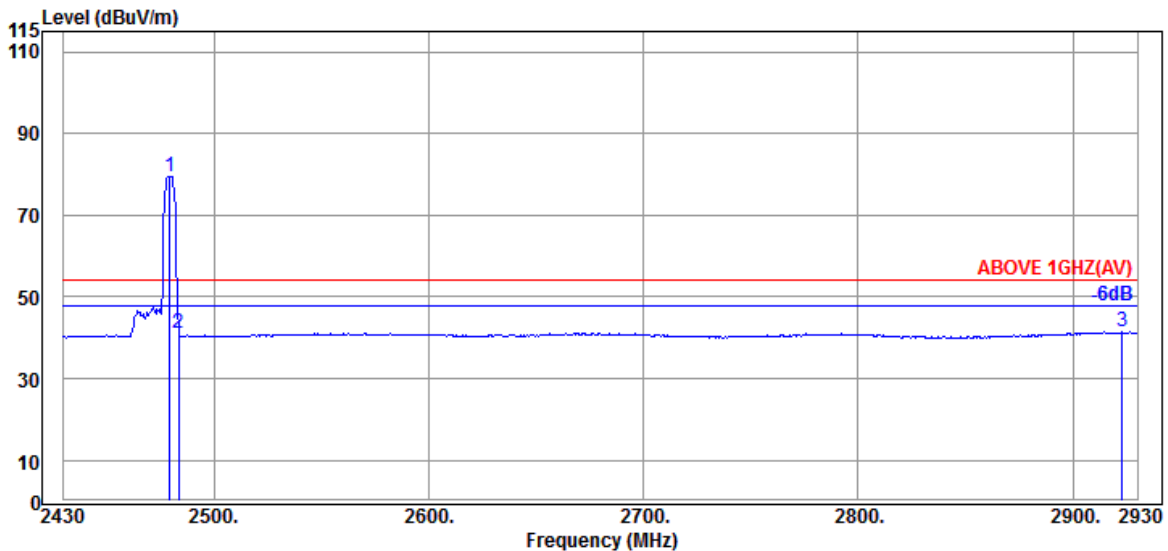


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.30	7.99	34.55	73.74	79.48	---	---	Average
2483.500	32.30	7.99	34.55	35.54	41.28	54.00	12.72	Average
2923.000	32.90	8.19	34.64	34.89	41.34	54.00	12.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

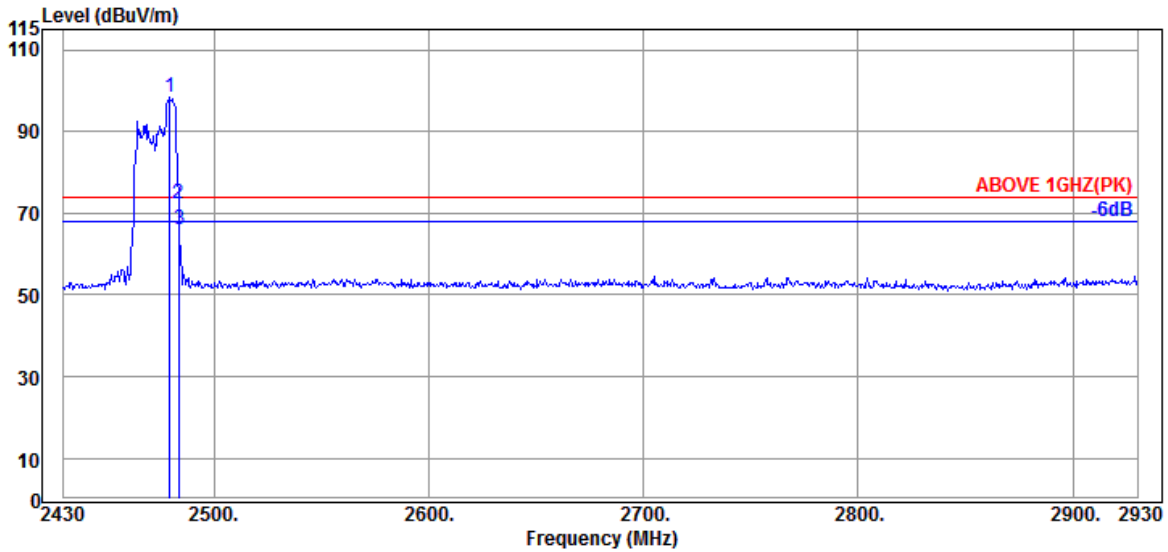

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.30	7.99	34.55	92.55	98.29	---	---	Peak
2483.500	32.30	7.99	34.55	66.74	72.48	74.00	1.52	Peak
2484.000	32.30	7.99	34.55	60.31	66.05	74.00	7.95	Peak

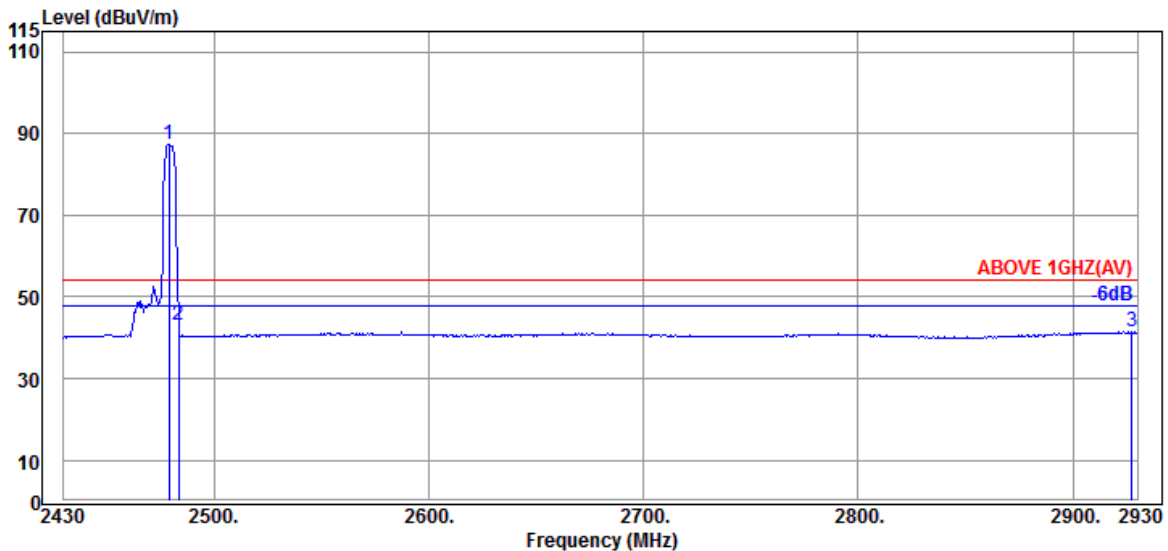


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	81.72	87.46	---	---	Average
2483.500	32.30	7.99	34.55	37.36	43.10	54.00	10.90	Average
2927.500	32.97	8.19	34.65	34.86	41.37	54.00	12.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

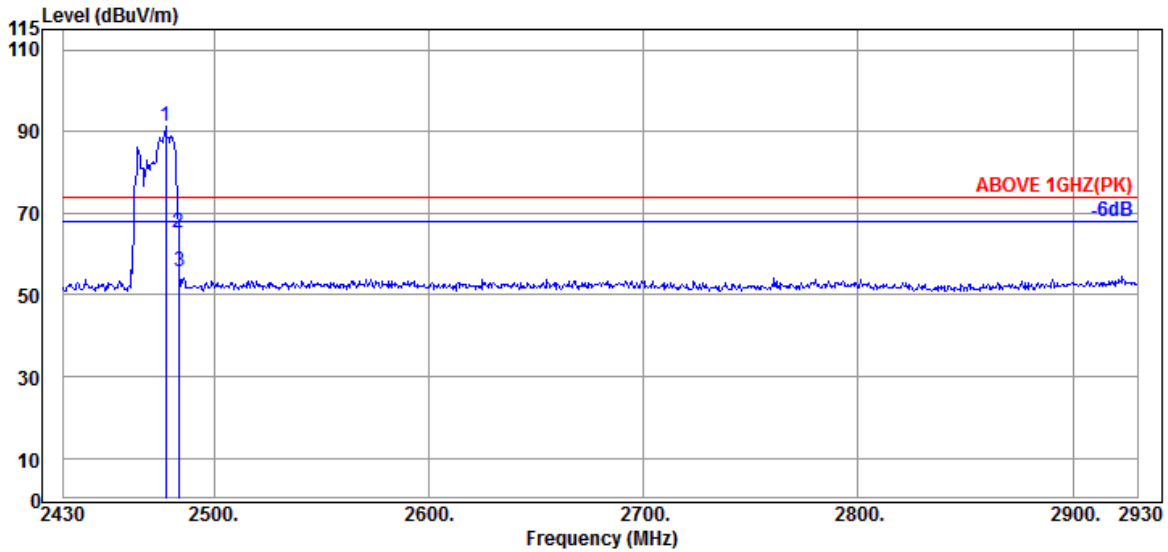

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	32.30	7.99	34.55	85.50	91.24	---	---	Peak
2483.500	32.30	7.99	34.55	59.64	65.38	74.00	8.62	Peak
2484.000	32.30	7.99	34.55	50.10	55.84	74.00	18.16	Peak

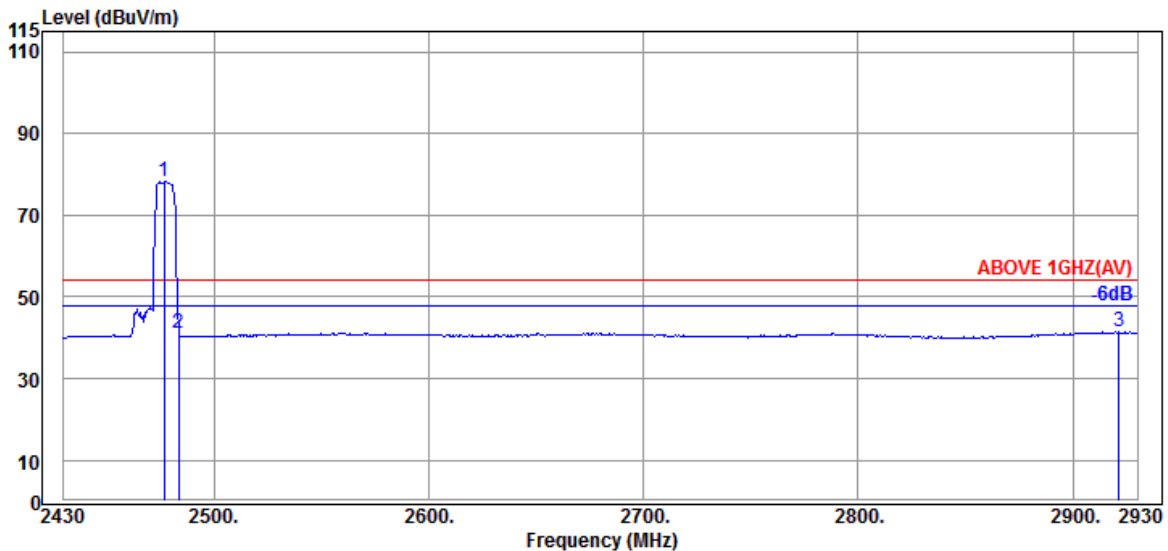


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	32.30	7.99	34.55	72.49	78.23	---	---	Average
2483.500	32.30	7.99	34.55	35.31	41.05	54.00	12.95	Average
2921.500	32.90	8.19	34.64	34.96	41.41	54.00	12.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

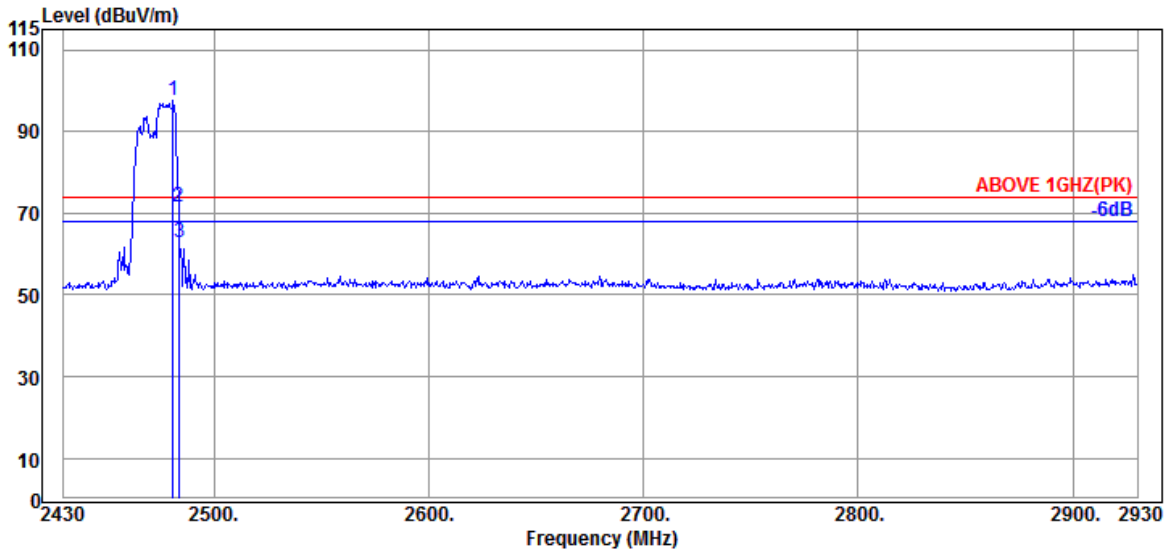

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	91.88	97.62	---	---	Peak
2483.500	32.30	7.99	34.55	65.94	71.68	74.00	2.32	Peak
2484.000	32.30	7.99	34.55	57.02	62.76	74.00	11.24	Peak

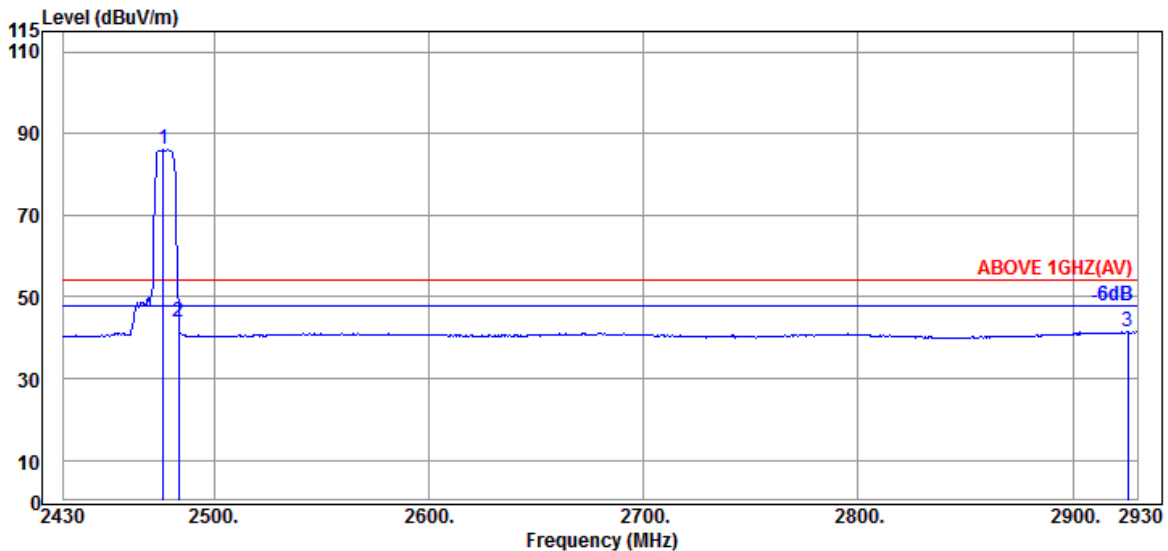


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	32.30	7.99	34.55	80.30	86.04	---	---	Average
2483.500	32.30	7.99	34.55	37.99	43.73	54.00	10.27	Average
2925.500	32.90	8.19	34.65	35.06	41.50	54.00	12.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

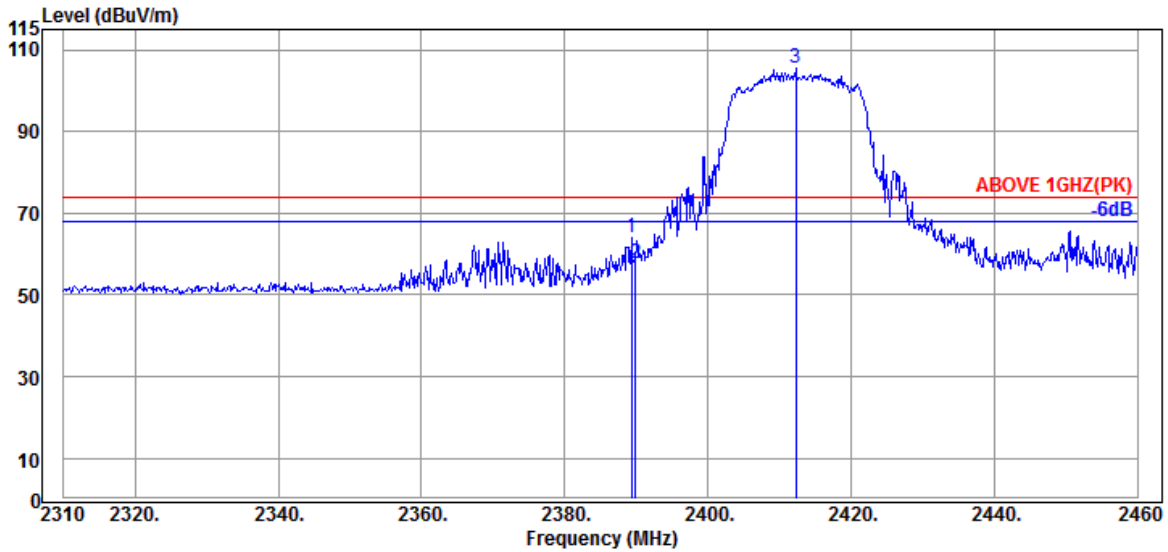

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	31.89	7.95	34.53	58.84	64.15	74.00	9.85	Peak
2389.950	31.89	7.95	34.54	52.35	57.65	74.00	16.35	Peak
@ 2412.300	31.94	7.96	34.54	99.99	105.35	---	---	Peak

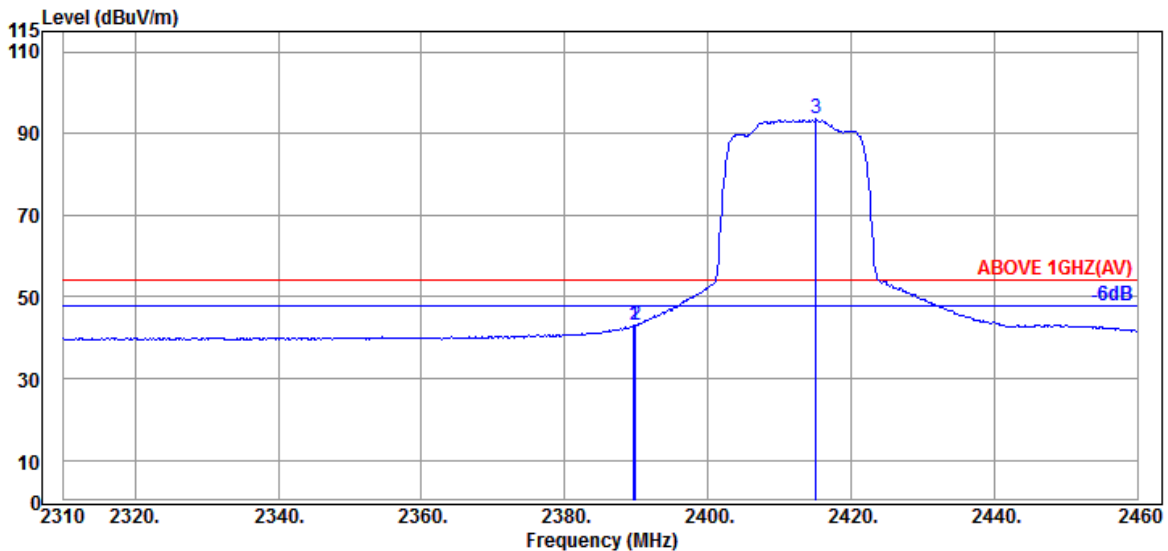


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	37.67	42.98	54.00	11.02	Average
2389.950	31.89	7.95	34.54	37.87	43.17	54.00	10.83	Average
@ 2415.150	31.94	7.96	34.54	88.11	93.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

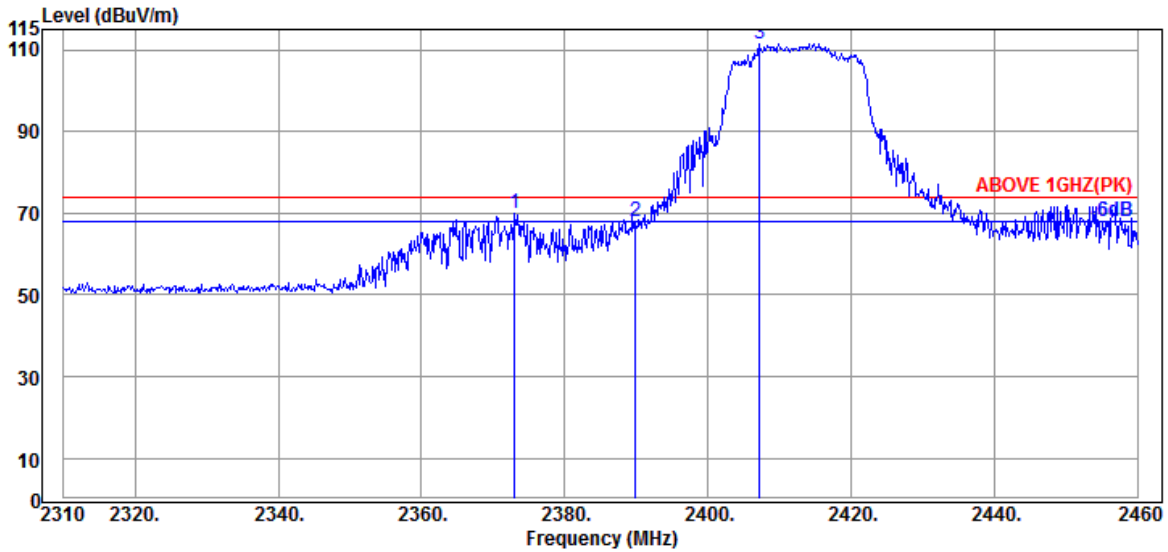

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.000	31.97	7.94	34.53	64.41	69.79	74.00	4.21	Peak
2389.950	31.89	7.95	34.54	62.65	67.95	74.00	6.05	Peak
@ 2407.200	31.87	7.95	34.54	106.33	111.61	---	---	Peak

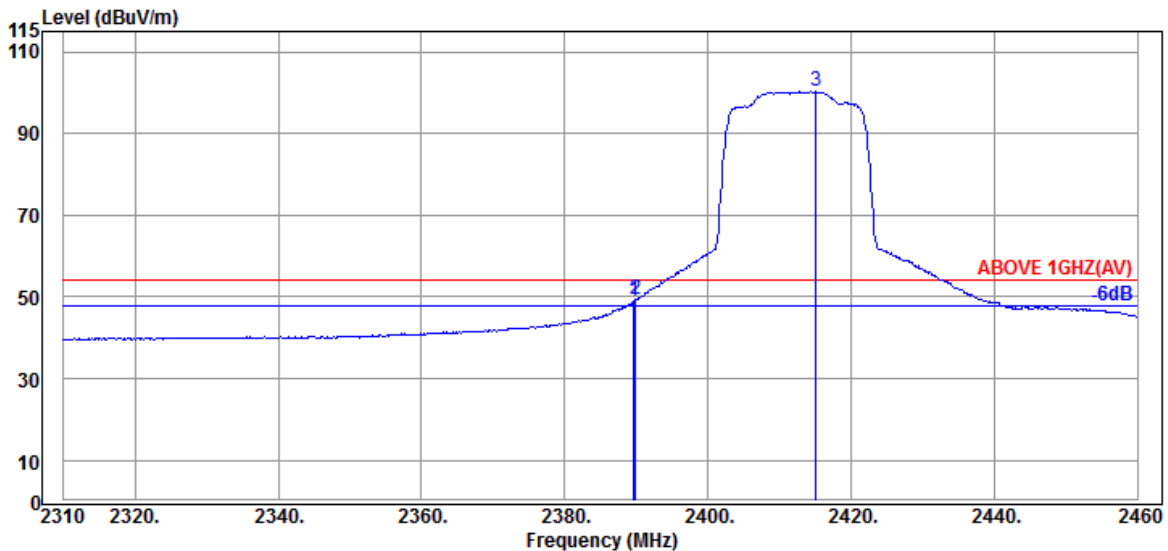


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	43.58	48.89	54.00	5.11	Average
2389.950	31.89	7.95	34.54	44.09	49.39	54.00	4.61	Average
@ 2415.150	31.94	7.96	34.54	94.86	100.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

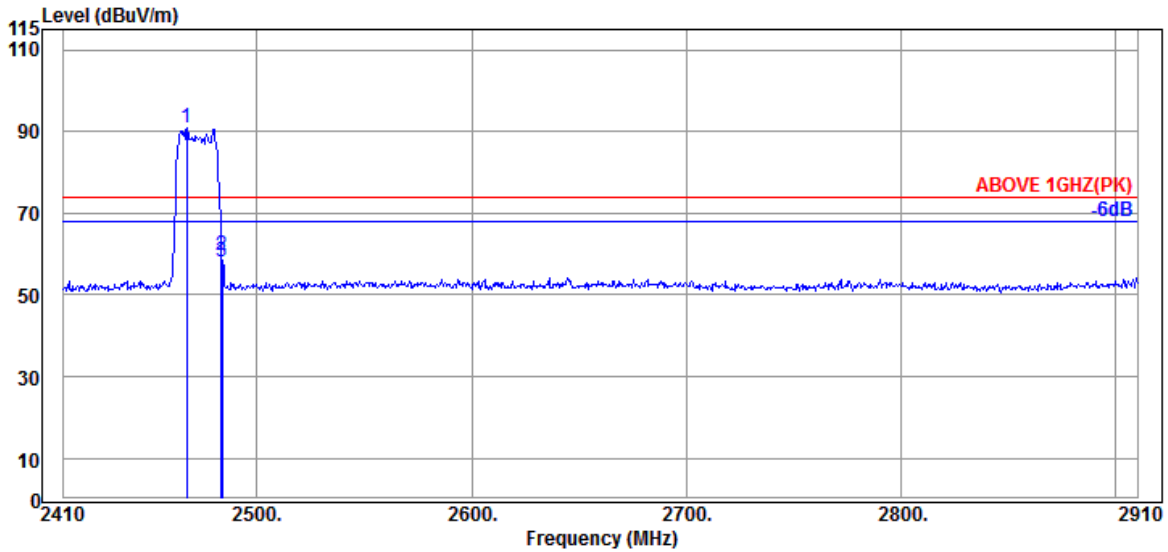

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	85.17	90.90	---	---	Peak
2483.500	32.30	7.99	34.55	54.11	59.85	74.00	14.15	Peak
2484.000	32.30	7.99	34.55	52.16	57.90	74.00	16.10	Peak

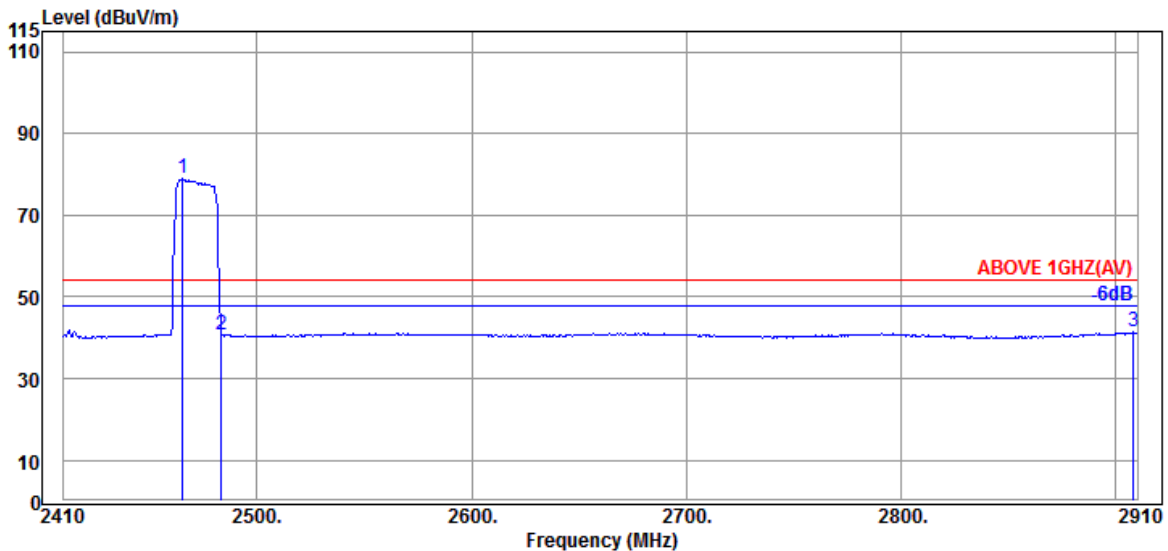


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	73.24	78.97	---	---	Average
2483.500	32.30	7.99	34.55	35.11	40.85	54.00	13.15	Average
2908.000	32.77	8.18	34.64	35.07	41.38	54.00	12.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

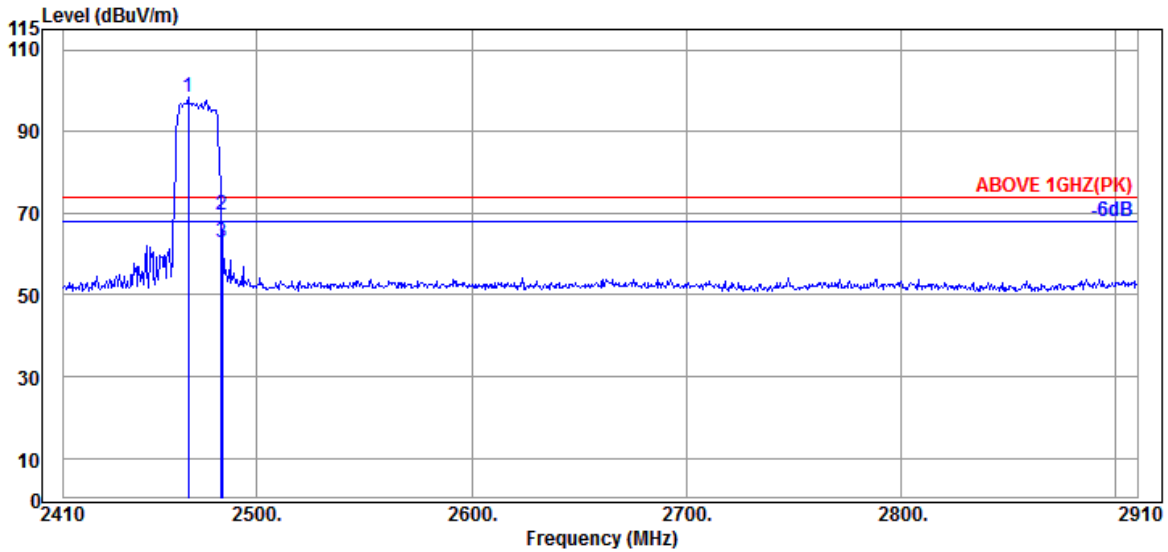

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	32.30	7.98	34.55	92.65	98.38	---	---	Peak
2483.500	32.30	7.99	34.55	63.74	69.48	74.00	4.52	Peak
2484.000	32.30	7.99	34.55	56.93	62.67	74.00	11.33	Peak

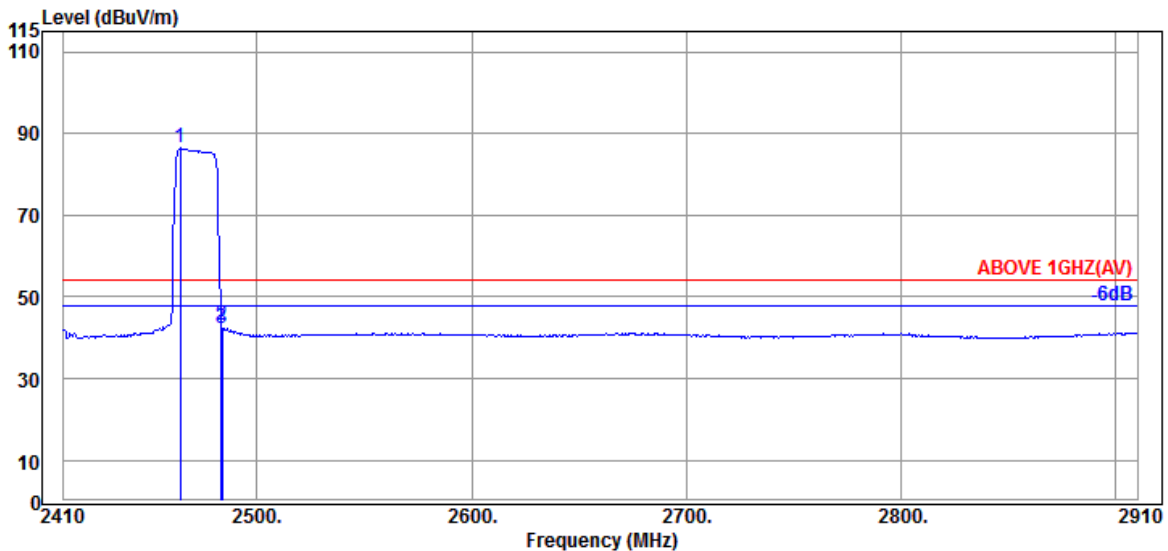


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	80.62	86.35	---	---	Average
2483.500	32.30	7.99	34.55	37.34	43.08	54.00	10.92	Average
2484.000	32.30	7.99	34.55	36.68	42.42	54.00	11.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE(2M)	Frequency	TX 2402MHz
------	---------	-----------	------------

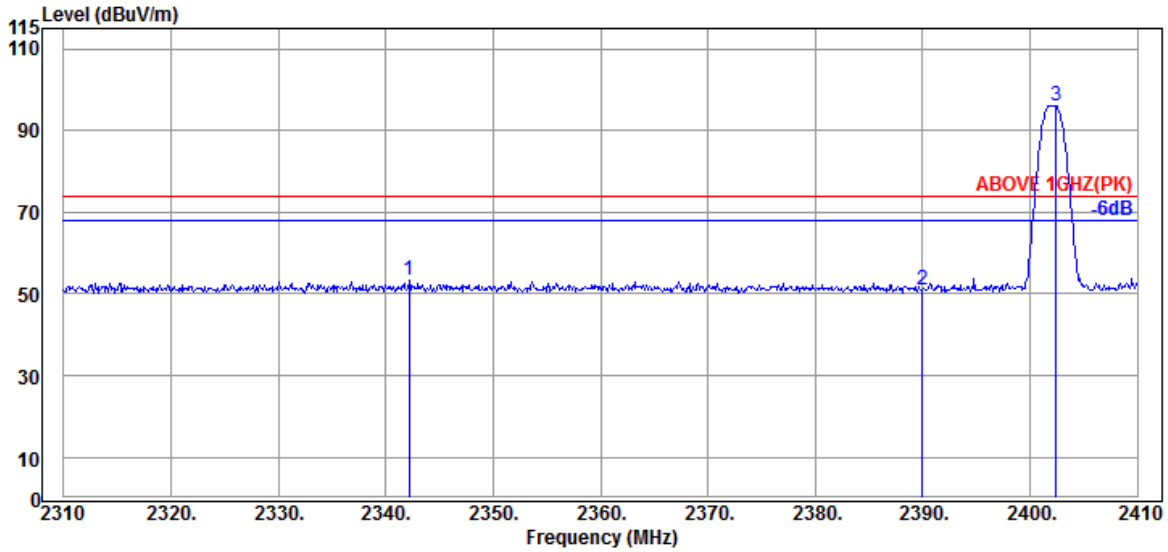

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.200	32.05	7.92	34.53	47.81	53.25	74.00	20.75	Peak
2390.000	31.89	7.95	34.54	45.79	51.09	74.00	22.91	Peak
@ 2402.400	31.80	7.95	34.54	90.86	96.07	---	---	Peak

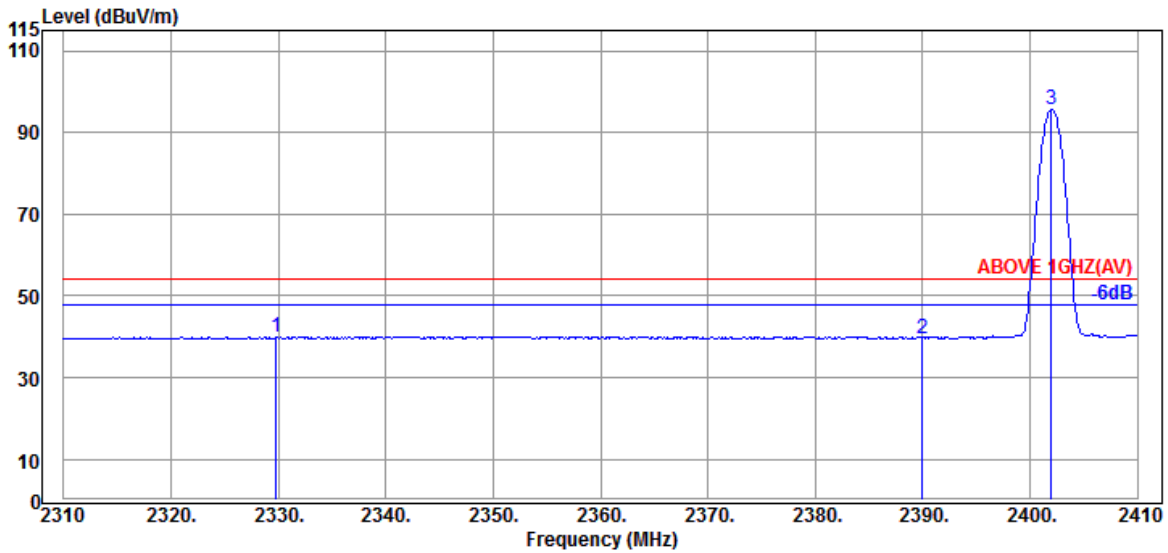


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2329.800	32.02	7.92	34.52	34.68	40.10	54.00	13.90	Average
2390.000	31.89	7.95	34.54	34.38	39.68	54.00	14.32	Average
@ 2402.000	31.80	7.95	34.54	90.31	95.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	BLE(2M)	Frequency	TX 2402MHz
------	---------	-----------	------------

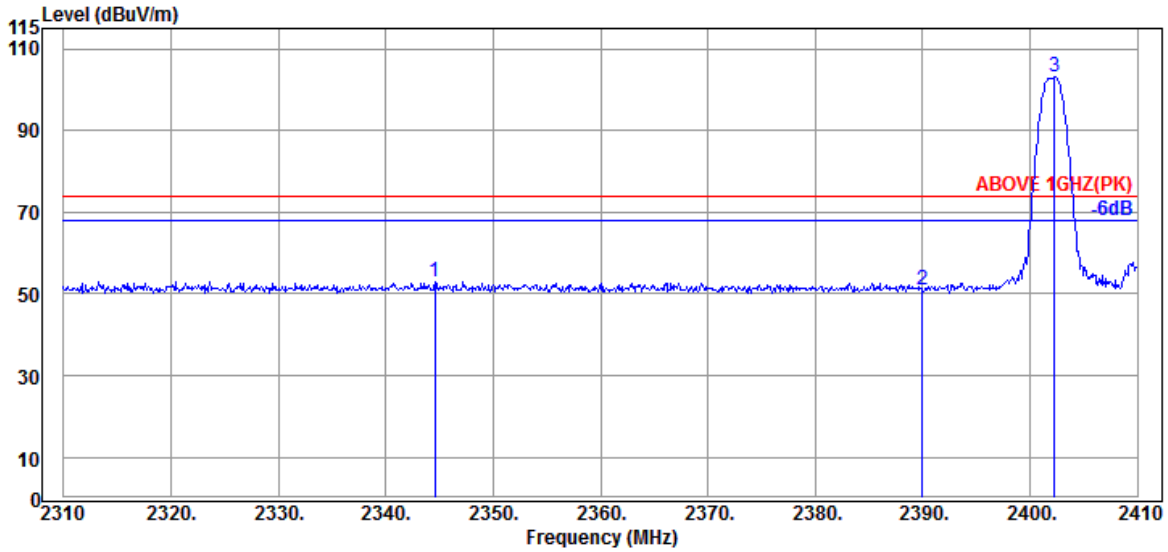

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2344.600	32.07	7.92	34.53	47.48	52.94	74.00	21.06	Peak
2390.000	31.89	7.95	34.54	45.84	51.14	74.00	22.86	Peak
@ 2402.300	31.80	7.95	34.54	97.77	102.98	---	---	Peak

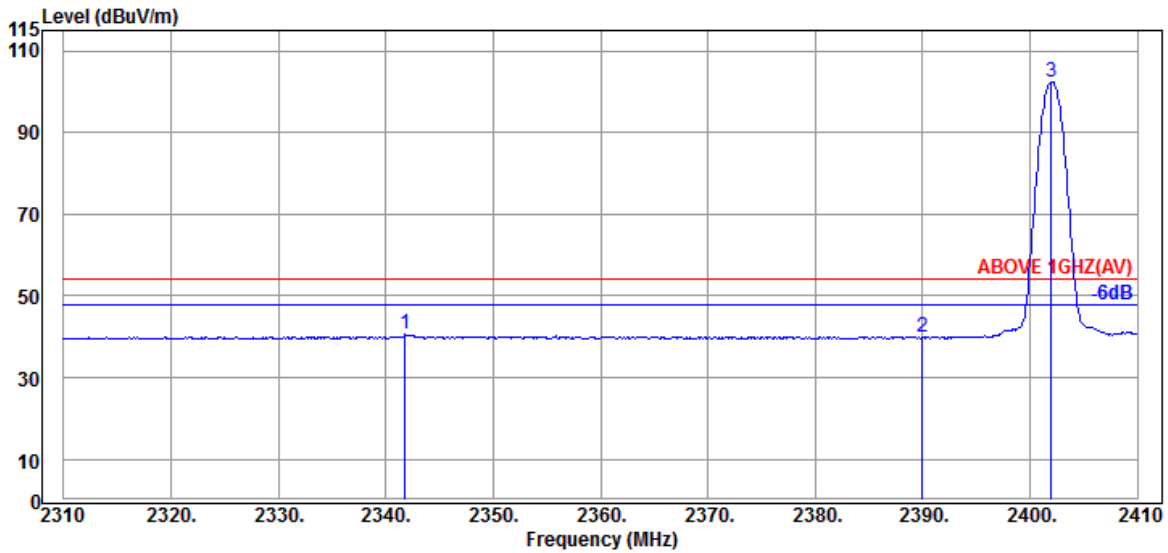


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.800	32.05	7.92	34.53	35.10	40.54	54.00	13.46	Average
2390.000	31.89	7.95	34.54	34.47	39.77	54.00	14.23	Average
@ 2402.000	31.80	7.95	34.54	97.30	102.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE(2M)	Frequency	TX 2480MHz
------	---------	-----------	------------

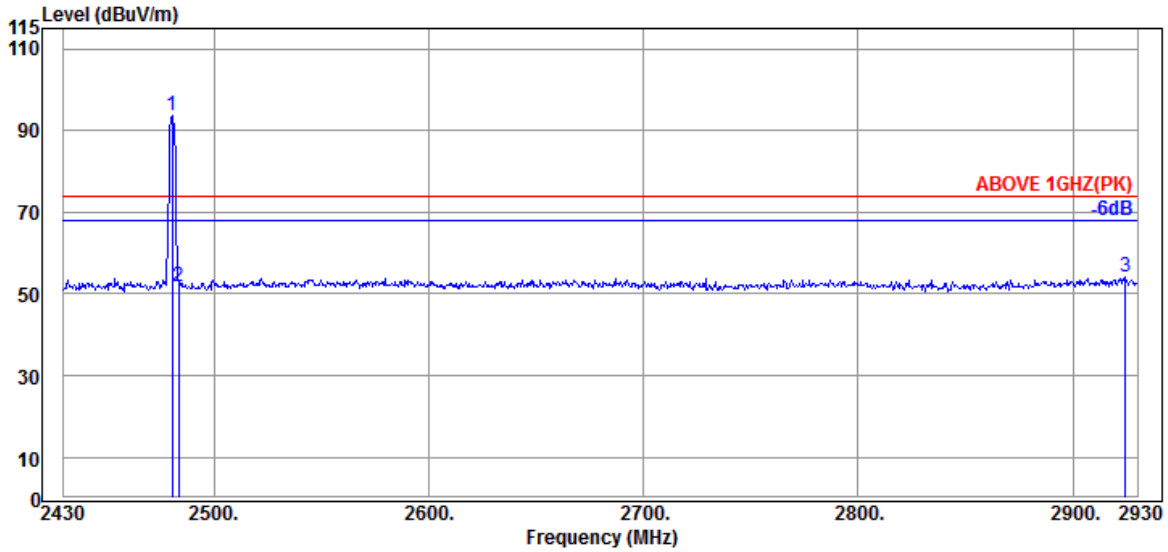

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	87.76	93.50	---	---	Peak
2483.500	32.30	7.99	34.55	45.90	51.64	74.00	22.36	Peak
2924.500	32.90	8.19	34.64	47.77	54.22	74.00	19.78	Peak

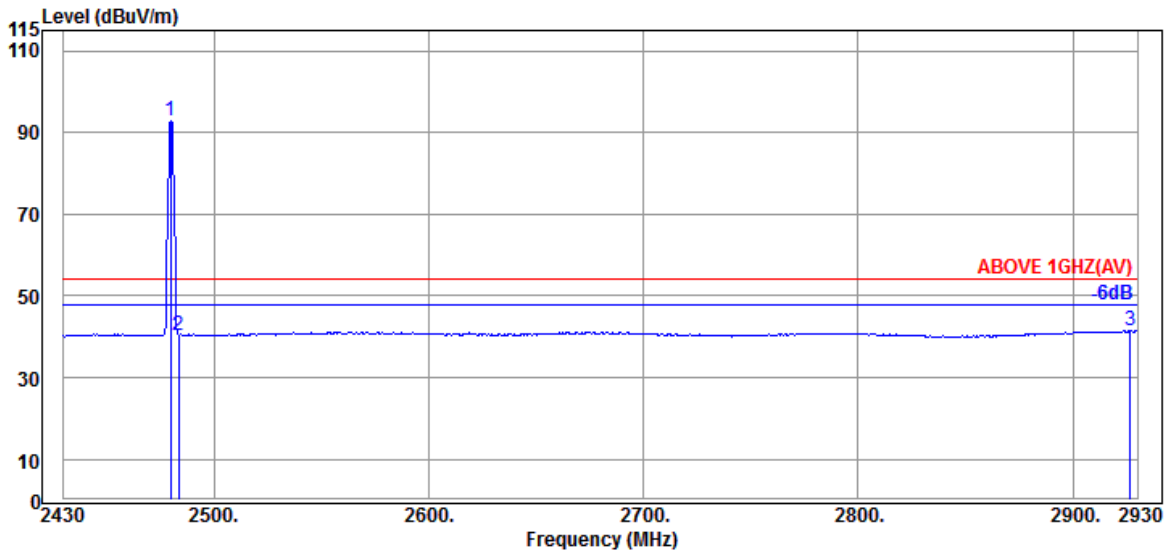


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	87.24	92.98	---	---	Average
2483.500	32.30	7.99	34.55	34.68	40.42	54.00	13.58	Average
2926.500	32.97	8.19	34.65	34.92	41.43	54.00	12.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE(2M)	Frequency	TX 2480MHz
------	---------	-----------	------------

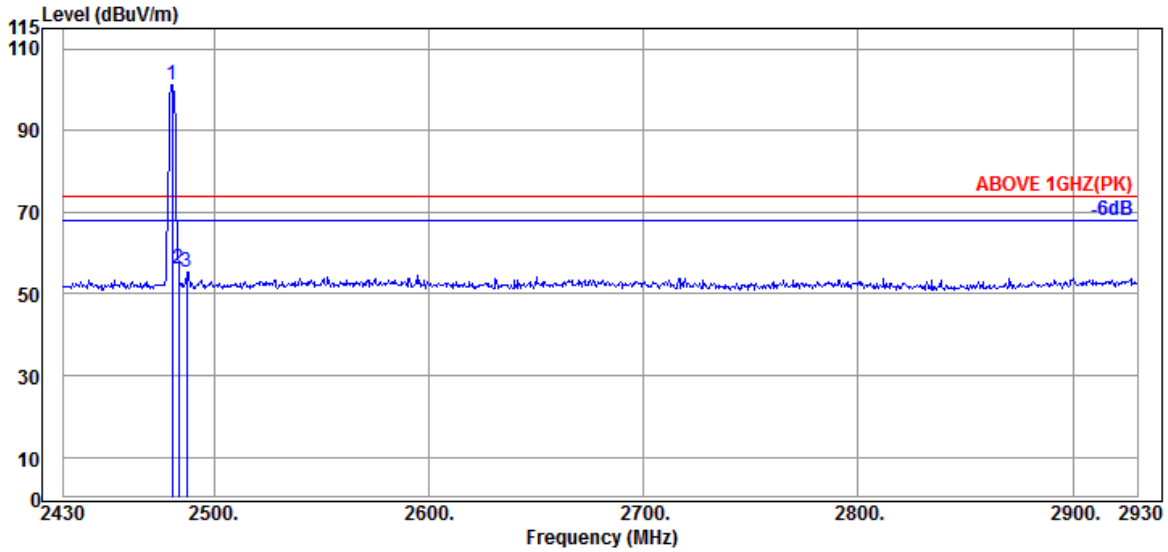

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	95.46	101.20	---	---	Peak
2483.500	32.30	7.99	34.55	50.32	56.06	74.00	17.94	Peak
2487.500	32.30	8.00	34.55	49.72	55.47	74.00	18.53	Peak

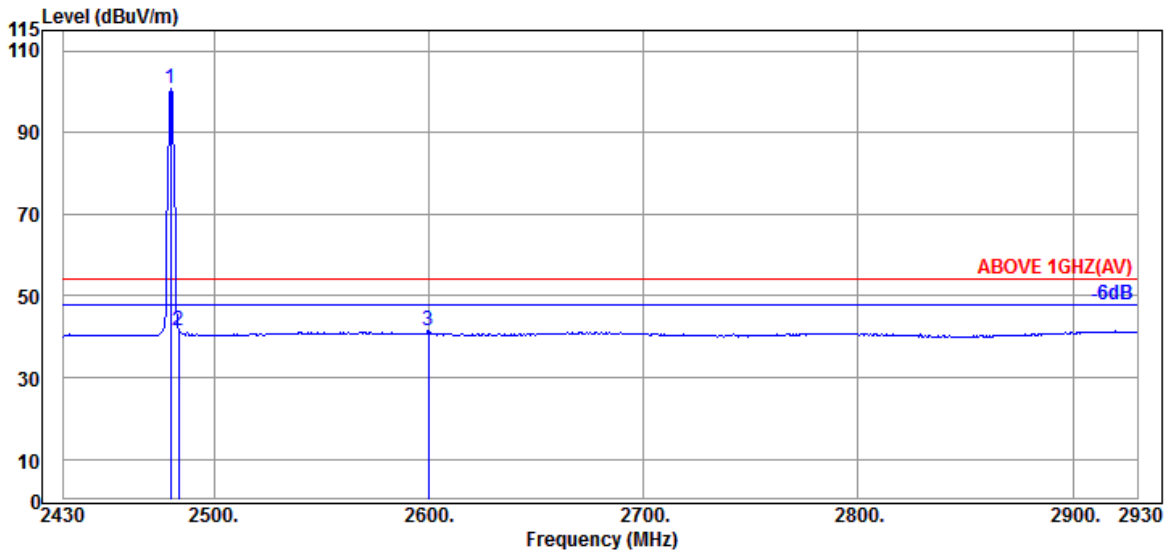

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	94.97	100.71	---	---	Average
2483.500	32.30	7.99	34.55	35.75	41.49	54.00	12.51	Average
2600.000	32.50	8.05	34.58	35.55	41.52	54.00	12.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

**A.2.2 Emissions outside the frequency band:**

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.25	42.24	54.00	11.76	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.70	41.69	54.00	12.31	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	30.98	40.97	54.00	13.03	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	30.63	40.62	54.00	13.38	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.86	41.85	54.00	12.15	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.80	41.79	54.00	12.21	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.48	42.47	54.00	11.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.28	41.27	54.00	12.73	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.17	42.16	54.00	11.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.05	41.04	54.00	12.96	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.28	42.27	54.00	11.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.74	42.73	54.00	11.27	Peak

Mode	BLE(2M)	Frequency	TX 2402MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	33.56	43.21	54.00	10.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	32.21	41.86	54.00	12.14	Peak

Mode	BLE(2M)	Frequency	TX 2440MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	10.54	34.43	32.47	42.43	54.00	11.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	10.54	34.43	32.12	42.08	54.00	11.92	Peak

Mode	BLE(2M)	Frequency	TX 2480MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	31.75	41.77	54.00	12.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	31.50	41.52	54.00	12.48	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.