**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

# TABLE OF CONTENTS

**A.1 CONDUCTED EMISSION ..... 2**

**A.2 RADIATED EMISSION ..... 4**

A.2.1 Emissions within Restricted Frequency Bands ..... 4

A.2.2 Emissions outside the frequency band ..... 153

A.2.3 Emissions in Non-restricted Frequency Bands ..... 168

**A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH ..... 169**

A.3.1 Average Output Power and Emission/Occupied Bandwidth ..... 169

A.3.2 Measurement Plots ..... 179

**A.4 POWER SPECTRAL DENSITY ..... 236**

A.4.1 Power Spectral Density Result ..... 236

A.4.2 Measurement Plots ..... 245

**A.5 FREQUENCY STABILITY ..... 287**

A.5.1 Frequency stability Result ..... 287



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

# A.1 CONDUCTED EMISSION

| | | | |
|---|---|---|---|
| Test Date | 2022/07/13 | Temp./Hum. | 26℃/47% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By | Chucky Chiu |

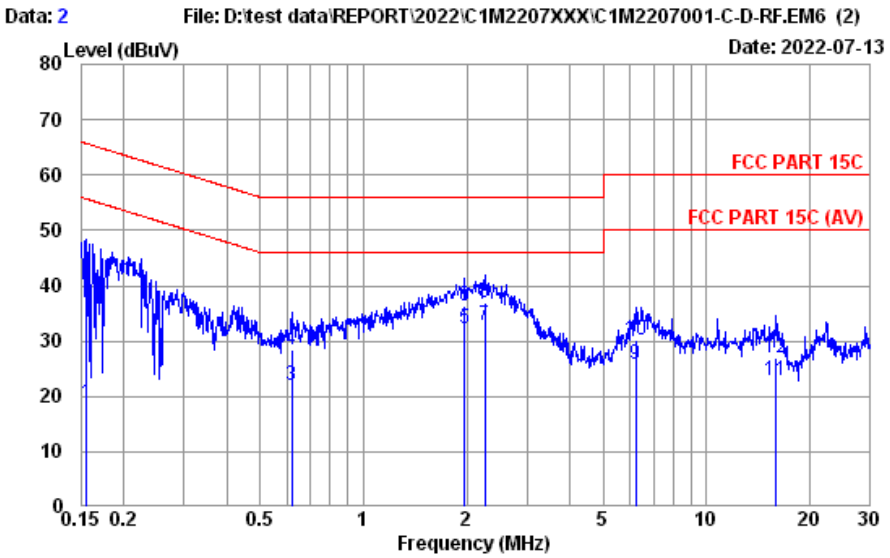


Site No. : No.8 Shielded Room
Instrument 1 : Receiver ESR3(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : FCC PART 15C
Environment : 26°C / 47%
EUT Model : 14ZB90Q
Test Mode : Operating
Data No. : 2
Phase : NEUTRAL
Engineer : Roy Hung
Test Rating : 120Vac/60Hz

| | Freq. (MHz) | AMN Factor (dB) | Cable Loss (dB) | Pulse Att. (dB) | Reading (dBμV) | Emission Level (dBμV) | Limits (dBμV) | Margin (dB) | Remark |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 0.156 | 10.34 | 0.03 | 9.85 | -1.32 | 18.90 | 55.69 | 36.79 | Average |
| 2 | 0.156 | 10.34 | 0.03 | 9.85 | 19.98 | 40.20 | 65.69 | 25.49 | QP |
| 3 | 0.617 | 10.33 | 0.03 | 9.85 | 1.82 | 22.03 | 46.00 | 23.97 | Average |
| 4 | 0.617 | 10.33 | 0.03 | 9.85 | 8.08 | 28.29 | 56.00 | 27.71 | QP |
| 5 | 1.970 | 10.36 | 0.06 | 9.86 | 11.97 | 32.25 | 46.00 | 13.75 | Average |
| 6 | 1.970 | 10.36 | 0.06 | 9.86 | 16.11 | 36.39 | 56.00 | 19.61 | QP |
| 7 | 2.261 | 10.37 | 0.07 | 9.86 | 12.47 | 32.77 | 46.00 | 13.23 | Average |
| 8 | 2.261 | 10.37 | 0.07 | 9.86 | 16.68 | 36.98 | 56.00 | 19.02 | QP |
| 9 | 6.219 | 10.51 | 0.11 | 9.87 | 5.21 | 25.70 | 50.00 | 24.30 | Average |
| 10 | 6.219 | 10.51 | 0.11 | 9.87 | 9.79 | 30.28 | 60.00 | 29.72 | QP |
| 11 | 15.970 | 10.91 | 0.17 | 9.92 | 1.92 | 22.92 | 50.00 | 27.08 | Average |
| 12 | 15.970 | 10.91 | 0.17 | 9.92 | 6.11 | 27.11 | 60.00 | 32.89 | QP |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Test Date | 2022/07/13 | Temp./Hum. | 26℃/47% |
|---|---|---|---|
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By | Chucky Chiu |

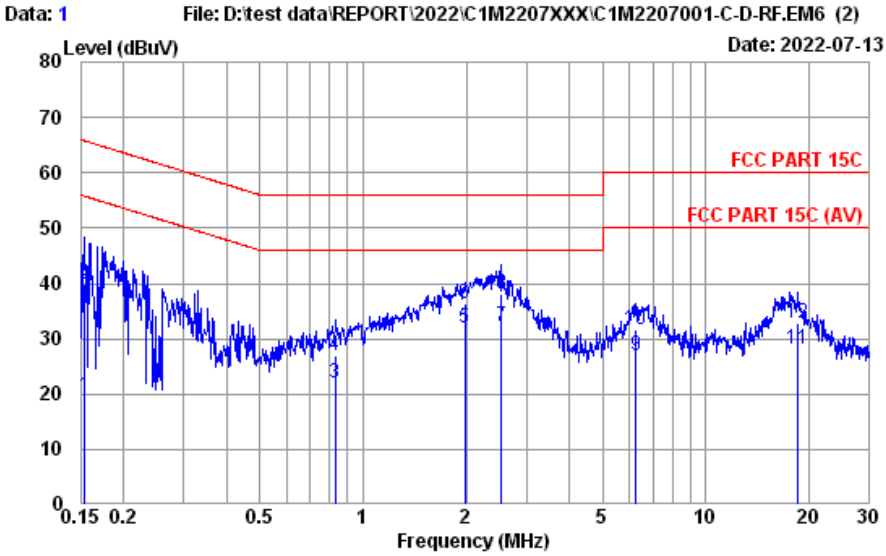


Site No. : No.8 Shielded Room
Instrument 1 : Receiver ESR3(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : FCC PART 15C
Environment : 26°C / 47%
EUT Model : 14ZB90Q
Test Mode : Operating

Data No. : 1
Phase : LINE
Engineer : Roy Hung
Test Rating : 120Vac/60Hz

| | Freq. (MHz) | AMN Factor (dB) | Cable Loss (dB) | Pulse Att. (dB) | Reading (dBμV) | Emission Level (dBμV) | Limits (dBμV) | Margin (dB) | Remark |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 0.154 | 10.22 | 0.03 | 9.85 | -0.50 | 19.60 | 55.78 | 36.18 | Average |
| 2 | 0.154 | 10.22 | 0.03 | 9.85 | 19.79 | 39.89 | 65.78 | 25.89 | QP |
| 3 | 0.830 | 10.23 | 0.04 | 9.85 | 1.98 | 22.10 | 46.00 | 23.90 | Average |
| 4 | 0.830 | 10.23 | 0.04 | 9.85 | 6.77 | 26.89 | 56.00 | 29.11 | QP |
| 5 | 1.980 | 10.25 | 0.06 | 9.86 | 11.75 | 31.92 | 46.00 | 14.08 | Average |
| 6 | 1.980 | 10.25 | 0.06 | 9.86 | 16.26 | 36.43 | 56.00 | 19.57 | QP |
| 7 | 2.527 | 10.26 | 0.07 | 9.86 | 11.98 | 32.17 | 46.00 | 13.83 | Average |
| 8 | 2.527 | 10.26 | 0.07 | 9.86 | 17.92 | 38.11 | 56.00 | 17.89 | QP |
| 9 | 6.252 | 10.35 | 0.11 | 9.87 | 6.68 | 27.01 | 50.00 | 22.99 | Average |
| 10 | 6.252 | 10.35 | 0.11 | 9.87 | 11.31 | 31.64 | 60.00 | 28.36 | QP |
| 11 | 18.622 | 10.62 | 0.18 | 9.93 | 7.53 | 28.26 | 50.00 | 21.74 | Average |
| 12 | 18.622 | 10.62 | 0.18 | 9.93 | 12.17 | 32.90 | 60.00 | 27.10 | QP |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

# A.2 RADIATED EMISSION

| | | | |
|---|---|---|---|
| Test Date | 2022/07/18 ~ 20 | Temp./Hum. | 23 ~ 25℃/59 ~ 63% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By | Martin Chen |

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

A.2.1.2 Frequency Below 1GHz

| | | | |
|---|---|---|---|
| Mode | 802.11n-HT40 | U-NII Band | 2C |
| | | Frequency | TX 5550MHz |

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 31.940 | 22.86 | 1.46 | 26.48 | 29.21 | 27.05 | 40.00 | 12.95 | Peak |
| 218.180 | 16.31 | 3.92 | 25.75 | 42.06 | 36.54 | 46.00 | 9.46 | Peak |
| 233.700 | 17.24 | 4.09 | 25.72 | 38.64 | 34.25 | 46.00 | 11.75 | Peak |
| 400.540 | 21.40 | 5.93 | 26.44 | 32.61 | 33.50 | 46.00 | 12.50 | Peak |
| 540.220 | 23.61 | 6.90 | 27.24 | 31.18 | 34.45 | 46.00 | 11.55 | Peak |
| 976.720 | 26.94 | 9.17 | 26.72 | 28.32 | 37.71 | 54.00 | 16.29 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 32.910 | 22.52 | 1.48 | 26.48 | 40.34 | 37.86 | 40.00 | 2.14 | Peak |
| 114.390 | 17.61 | 2.79 | 26.19 | 35.69 | 29.90 | 43.50 | 13.60 | Peak |
| 191.990 | 15.05 | 3.62 | 25.82 | 41.55 | 34.40 | 43.50 | 9.10 | Peak |
| 417.030 | 21.73 | 6.09 | 26.56 | 34.16 | 35.42 | 46.00 | 10.58 | Peak |
| 540.220 | 23.61 | 6.90 | 27.24 | 32.40 | 35.67 | 46.00 | 10.33 | Peak |
| 997.090 | 27.10 | 9.27 | 26.66 | 28.76 | 38.47 | 54.00 | 15.53 | Peak |



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

**Band Edge:**

| Mode | 802.11a | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5180MHz |

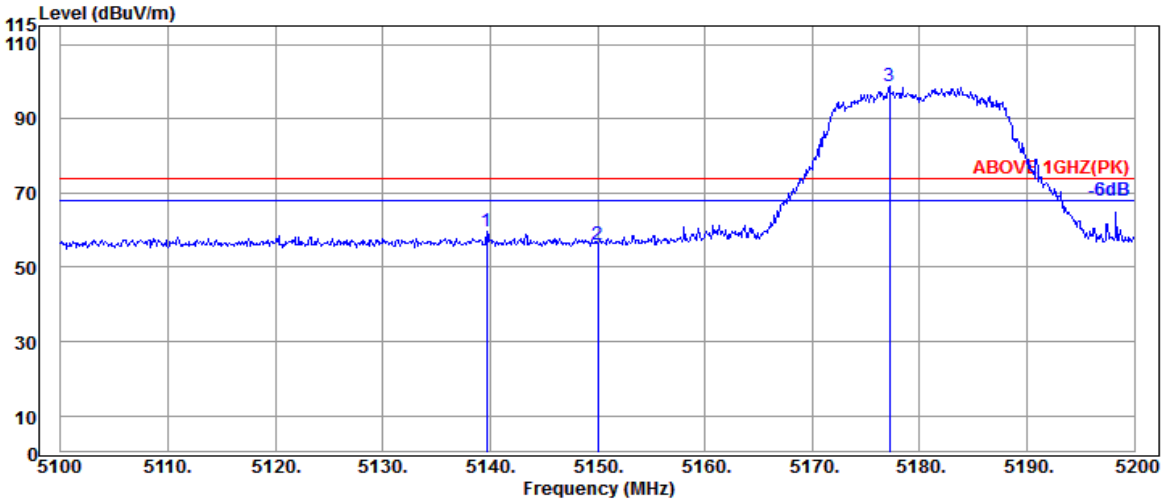


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5139.700 | 33.70 | 8.88 | 39.29 | 56.48 | 59.77 | 74.00 | 14.23 | Peak |
| | 5150.000 | 33.70 | 8.88 | 39.29 | 53.02 | 56.31 | 74.00 | 17.69 | Peak |
| @ | 5177.200 | 33.70 | 8.90 | 39.28 | 95.38 | 98.70 | --- | --- | Peak |

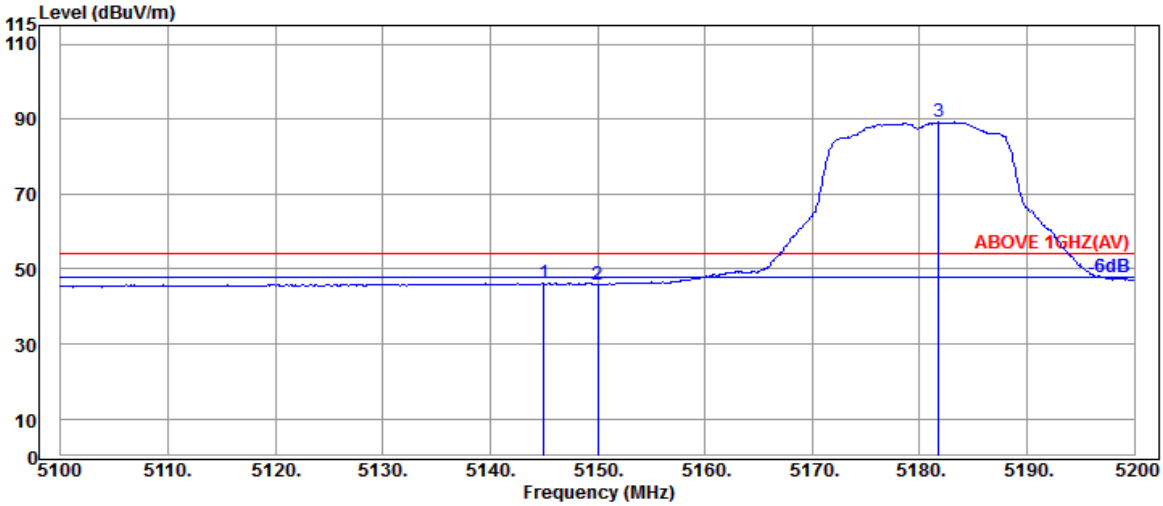


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5145.000 | 33.70 | 8.88 | 39.29 | 43.10 | 46.39 | 54.00 | 7.61 | Average |
| | 5150.000 | 33.70 | 8.88 | 39.29 | 42.55 | 45.84 | 54.00 | 8.16 | Average |
| @ | 5181.800 | 33.70 | 8.90 | 39.28 | 85.83 | 89.15 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5180MHz |

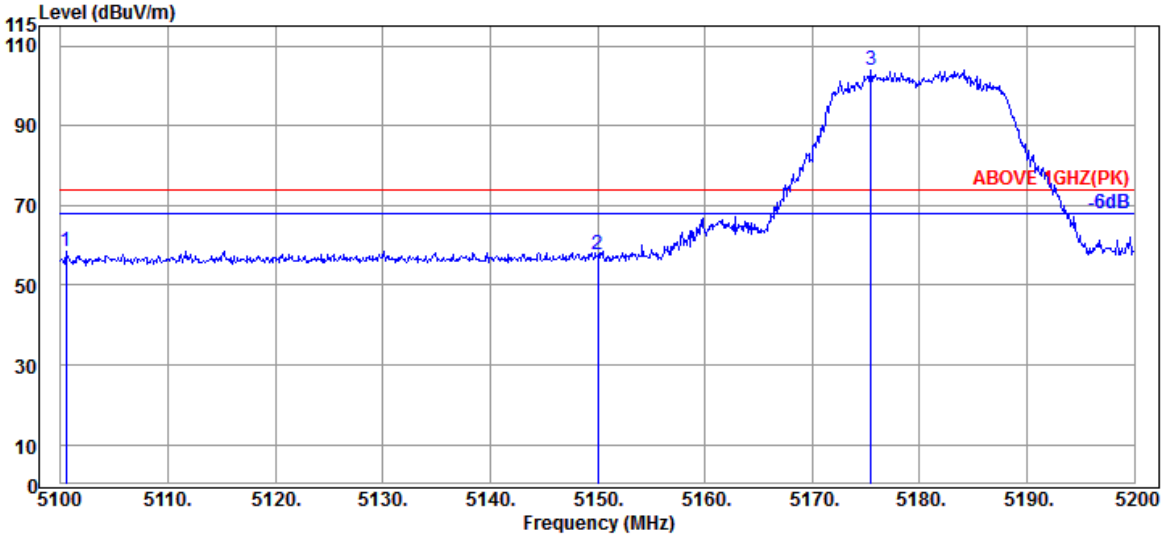


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5100.500 | 33.70 | 8.86 | 39.29 | 55.37 | 58.64 | 74.00 | 15.36 | Peak |
| 5150.000 | 33.70 | 8.88 | 39.29 | 54.44 | 57.73 | 74.00 | 16.27 | Peak |
| @ 5175.500 | 33.70 | 8.90 | 39.28 | 100.75 | 104.07 | --- | --- | Peak |

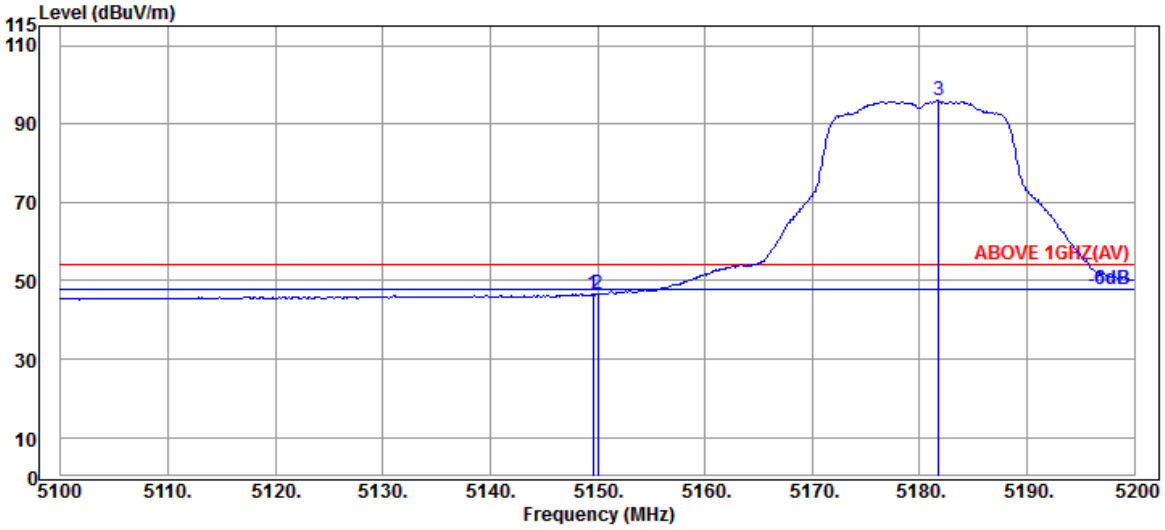


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5149.600 | 33.70 | 8.88 | 39.29 | 43.39 | 46.68 | 54.00 | 7.32 | Average |
| 5150.000 | 33.70 | 8.88 | 39.29 | 43.25 | 46.54 | 54.00 | 7.46 | Average |
| @ 5181.800 | 33.70 | 8.90 | 39.28 | 92.63 | 95.95 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5320MHz |

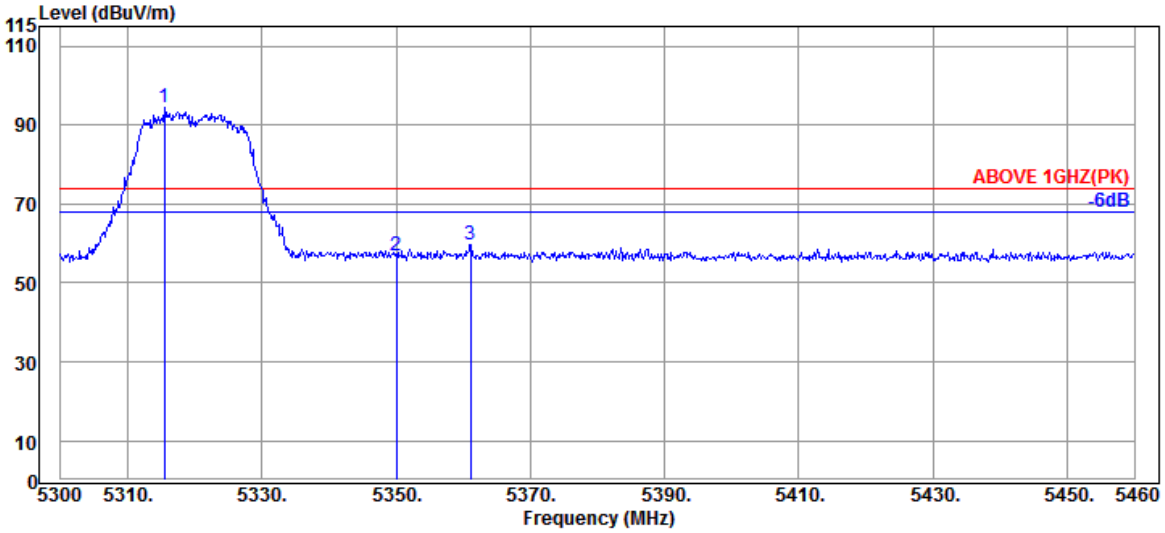


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5315.520 | 34.03 | 8.98 | 39.27 | 90.89 | 94.63 | --- | --- | Peak |
| 5350.080 | 33.90 | 8.99 | 39.27 | 53.36 | 56.98 | 74.00 | 17.02 | Peak |
| 5361.120 | 33.97 | 9.00 | 39.27 | 55.97 | 59.67 | 74.00 | 14.33 | Peak |

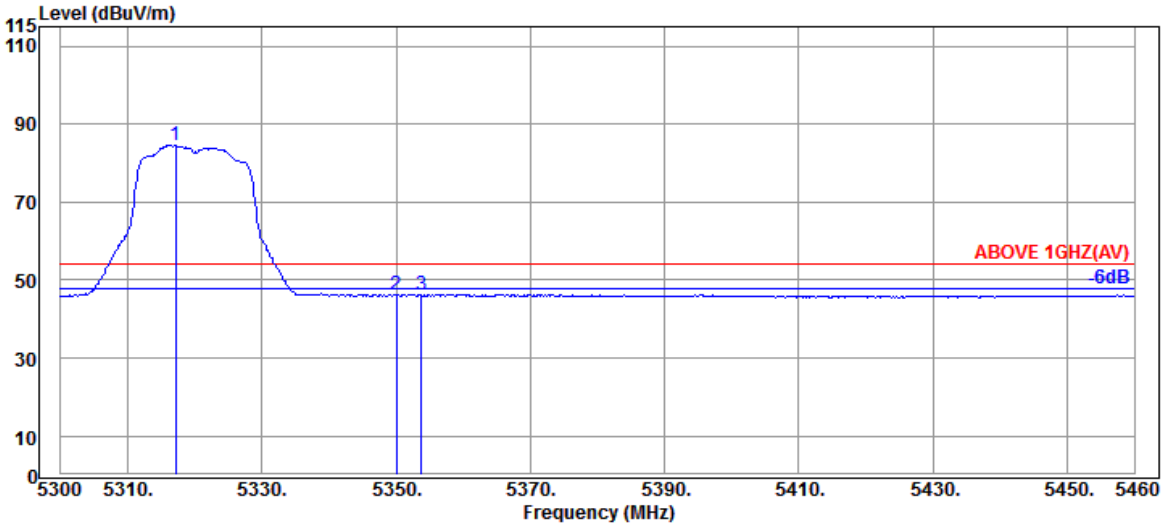


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5317.120 | 34.03 | 8.98 | 39.27 | 80.92 | 84.66 | --- | --- | Average |
| 5350.080 | 33.90 | 8.99 | 39.27 | 42.53 | 46.15 | 54.00 | 7.85 | Average |
| 5353.760 | 33.90 | 8.99 | 39.27 | 42.70 | 46.32 | 54.00 | 7.68 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5320MHz |

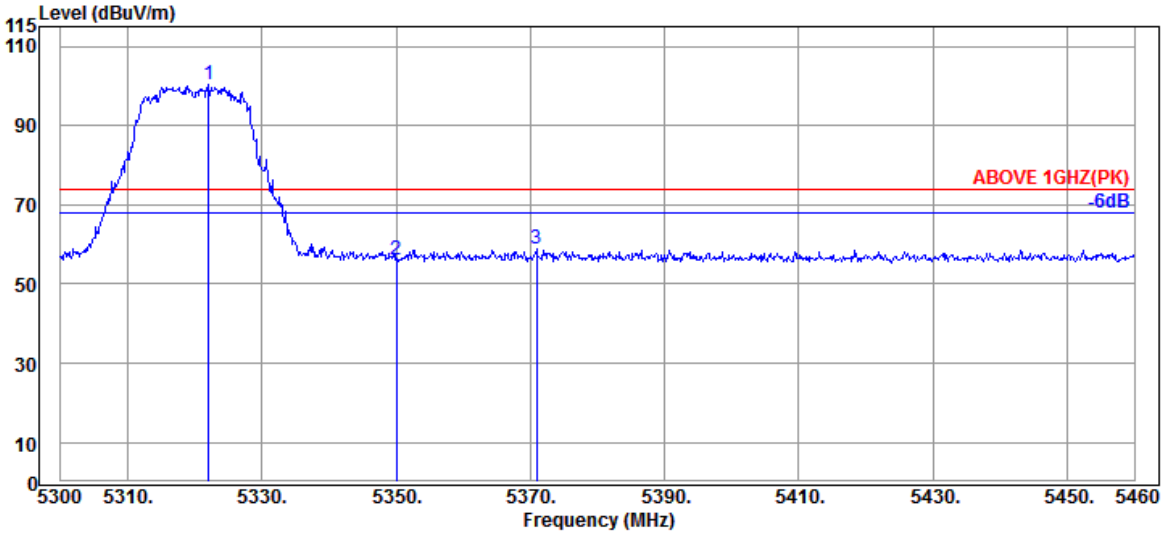


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5322.080 | 34.03 | 8.98 | 39.27 | 96.59 | 100.33 | --- | --- | Peak |
| 5350.080 | 33.90 | 8.99 | 39.27 | 52.39 | 56.01 | 74.00 | 17.99 | Peak |
| 5370.880 | 34.03 | 9.01 | 39.27 | 55.04 | 58.81 | 74.00 | 15.19 | Peak |

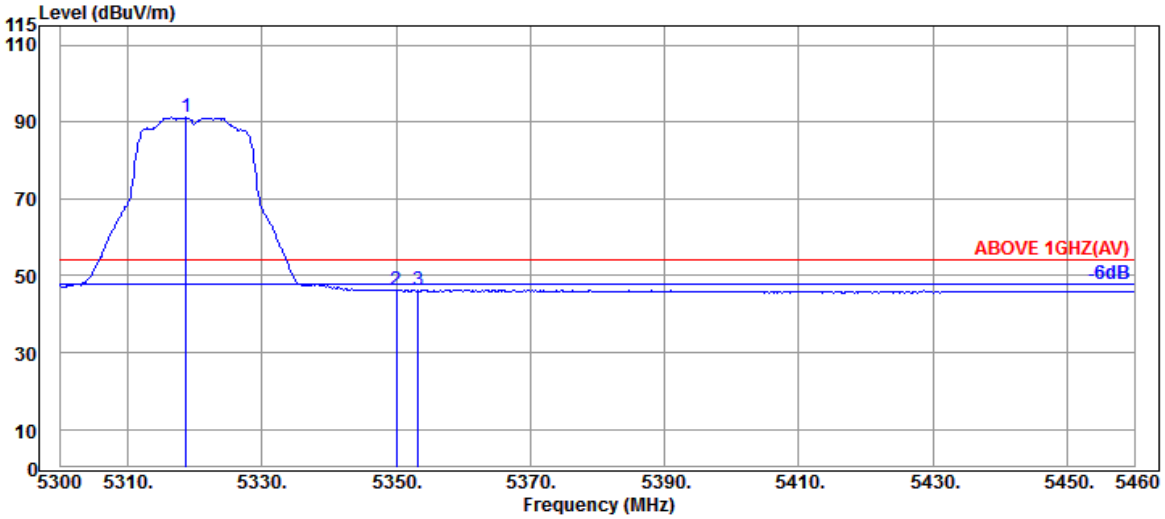


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5318.720 | 34.03 | 8.98 | 39.27 | 87.45 | 91.19 | --- | --- | Average |
| 5350.080 | 33.90 | 8.99 | 39.27 | 42.64 | 46.26 | 54.00 | 7.74 | Average |
| 5353.280 | 33.90 | 8.99 | 39.27 | 42.65 | 46.27 | 54.00 | 7.73 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5500MHz |

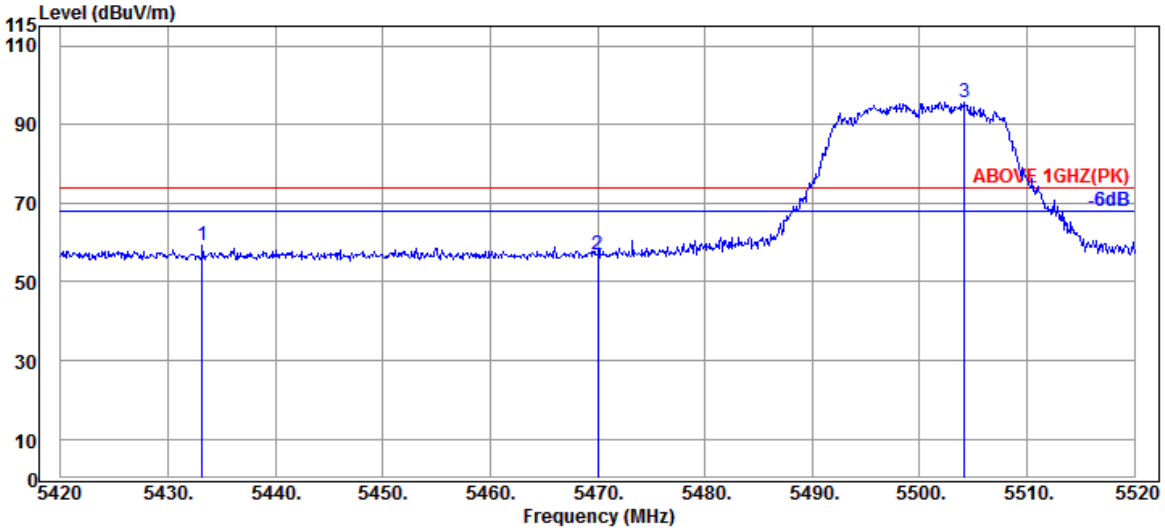


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5433.200 | 34.17 | 9.04 | 39.27 | 55.31 | 59.25 | 74.00 | 14.75 | Peak |
| 5470.000 | 34.17 | 9.06 | 39.26 | 52.86 | 56.83 | 74.00 | 17.17 | Peak |
| @ 5504.200 | 34.10 | 9.08 | 39.26 | 91.80 | 95.72 | --- | --- | Peak |

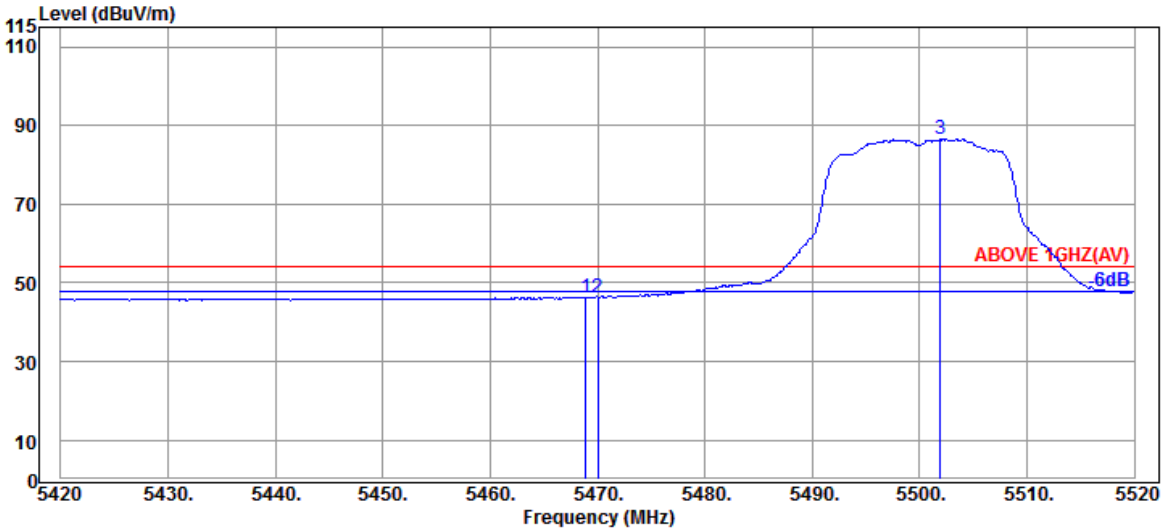


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.900 | 34.17 | 9.06 | 39.26 | 42.31 | 46.28 | 54.00 | 7.72 | Average |
| 5470.000 | 34.17 | 9.06 | 39.26 | 42.31 | 46.28 | 54.00 | 7.72 | Average |
| @ 5501.900 | 34.10 | 9.08 | 39.26 | 82.57 | 86.49 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5500MHz |

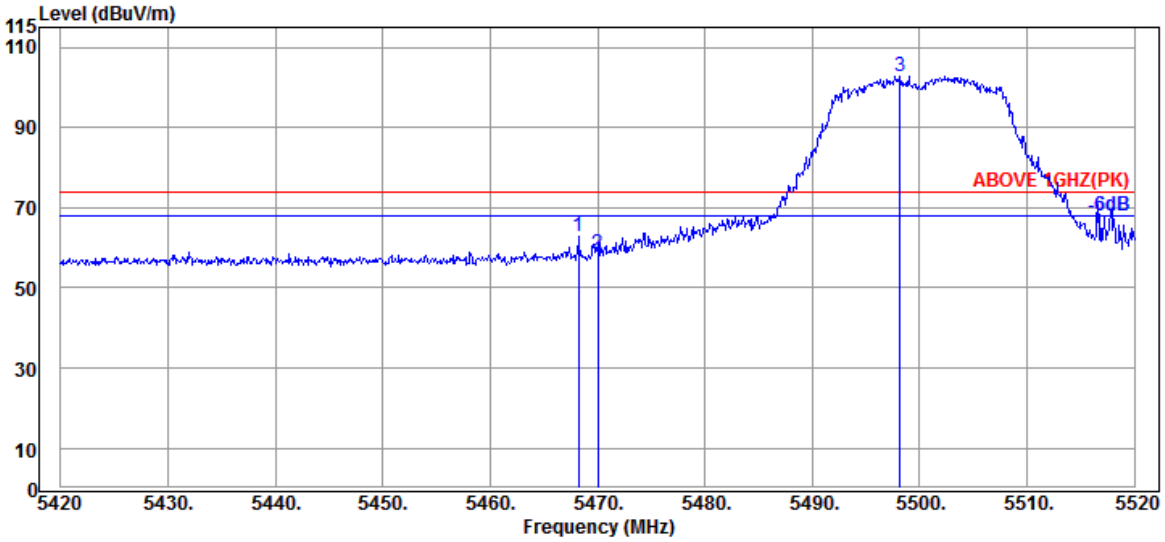


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.200 | 34.17 | 9.06 | 39.26 | 58.72 | 62.69 | 74.00 | 11.31 | Peak |
| 5470.000 | 34.17 | 9.06 | 39.26 | 54.46 | 58.43 | 74.00 | 15.57 | Peak |
| @ 5498.200 | 34.10 | 9.08 | 39.26 | 98.91 | 102.83 | --- | --- | Peak |

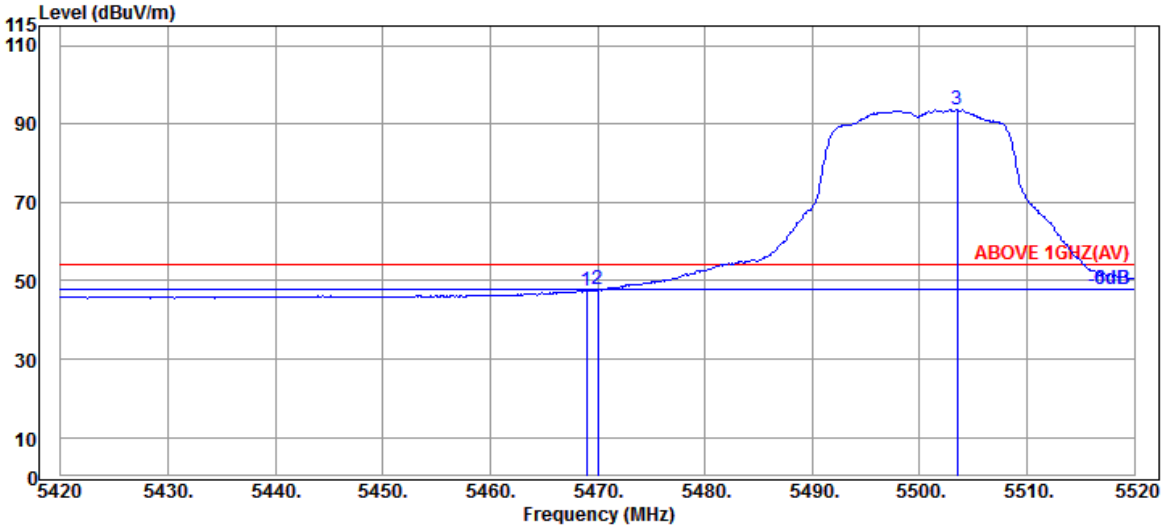


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5469.000 | 34.17 | 9.06 | 39.26 | 43.60 | 47.57 | 54.00 | 6.43 | Average |
| 5470.000 | 34.17 | 9.06 | 39.26 | 43.80 | 47.77 | 54.00 | 6.23 | Average |
| @ 5503.500 | 34.10 | 9.08 | 39.26 | 89.65 | 93.57 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5700MHz |

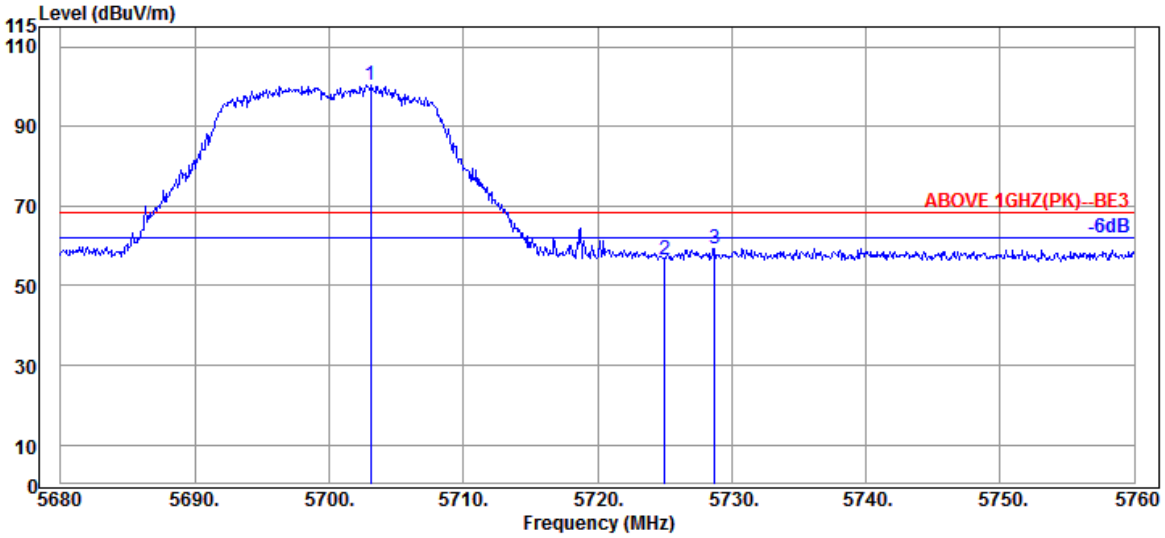


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5703.120 | 33.80 | 9.18 | 39.30 | 96.61 | 100.29 | --- | --- | Peak |
| 5725.040 | 33.80 | 9.20 | 39.30 | 52.91 | 56.61 | 68.20 | 11.59 | Peak |
| 5728.720 | 33.80 | 9.20 | 39.31 | 55.67 | 59.36 | 68.20 | 8.84 | Peak |

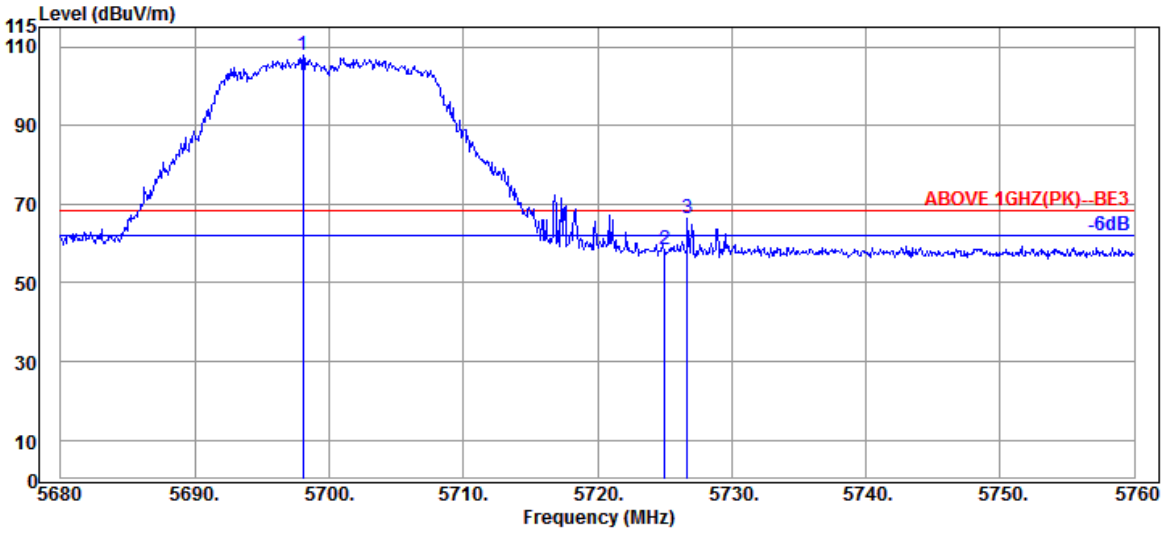


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5698.080 | 33.80 | 9.18 | 39.30 | 104.13 | 107.81 | --- | --- | Peak |
| 5725.040 | 33.80 | 9.20 | 39.30 | 54.75 | 58.45 | 68.20 | 9.75 | Peak |
| 5726.720 | 33.80 | 9.20 | 39.31 | 62.65 | 66.34 | 68.20 | 1.86 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

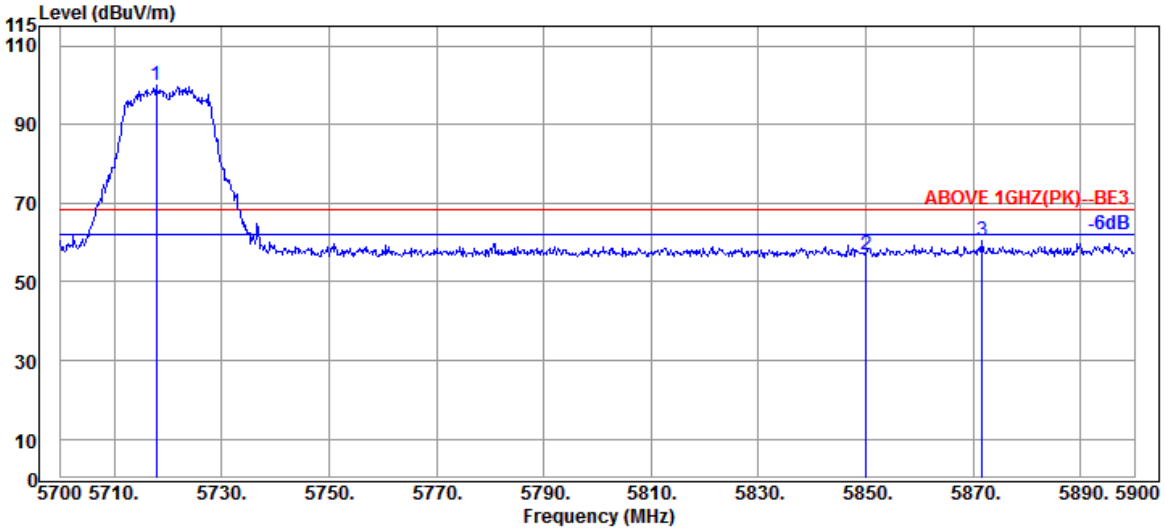


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5717.800 | 33.80 | 9.19 | 39.30 | 96.29 | 99.98 | --- | --- | Peak |
| 5850.000 | 34.10 | 9.25 | 39.33 | 53.07 | 57.09 | 68.20 | 11.11 | Peak |
| 5871.600 | 34.10 | 9.26 | 39.33 | 56.44 | 60.47 | 68.20 | 7.73 | Peak |

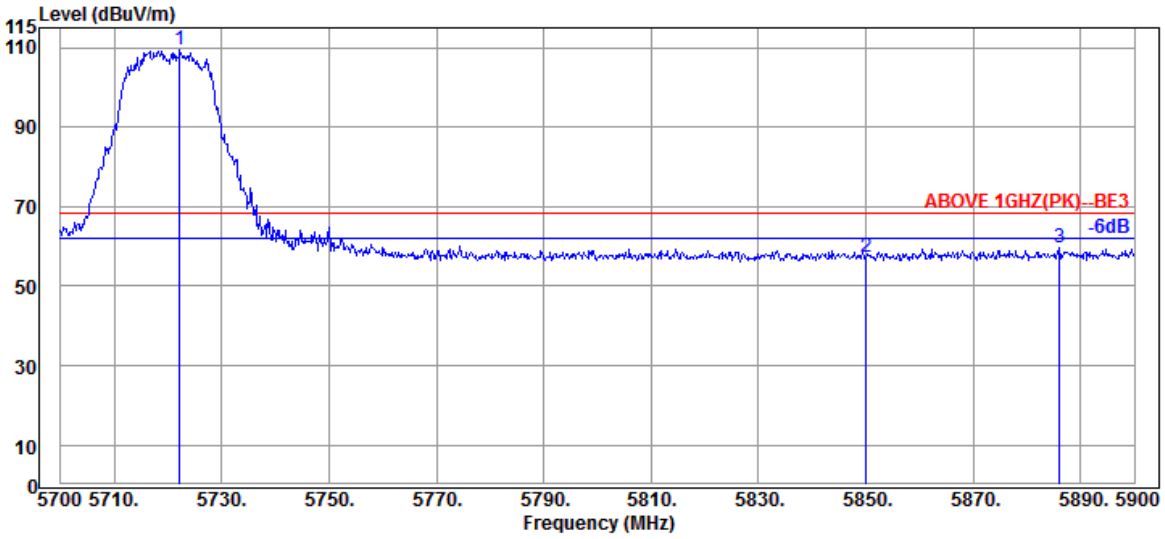


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5722.200 | 33.80 | 9.20 | 39.30 | 105.65 | 109.35 | --- | --- | Peak |
| 5850.000 | 34.10 | 9.25 | 39.33 | 53.12 | 57.14 | 68.20 | 11.06 | Peak |
| 5886.000 | 34.10 | 9.27 | 39.34 | 55.61 | 59.64 | 68.20 | 8.56 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

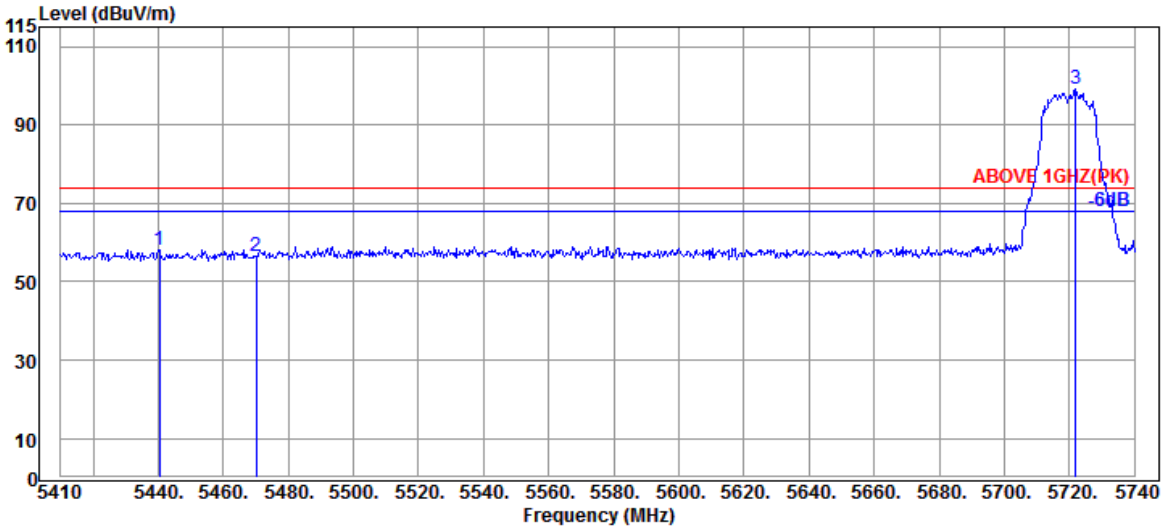


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5440.360 | 34.17 | 9.04 | 39.26 | 54.21 | 58.16 | 74.00 | 15.84 | Peak |
| | 5470.060 | 34.17 | 9.06 | 39.26 | 52.47 | 56.44 | 74.00 | 17.56 | Peak |
| @ | 5721.850 | 33.80 | 9.19 | 39.30 | 95.35 | 99.04 | --- | --- | Peak |

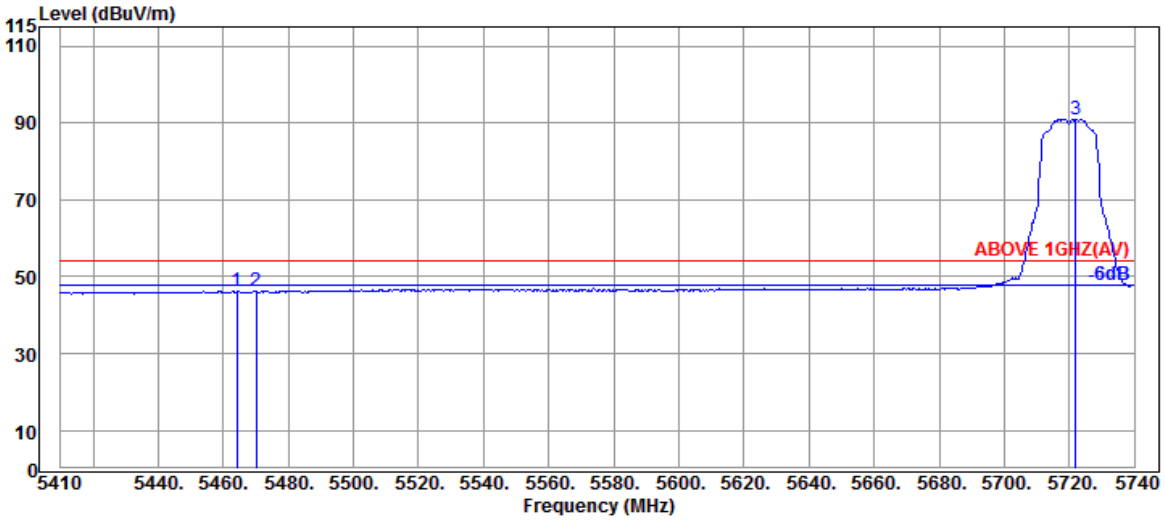


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5464.120 | 34.17 | 9.06 | 39.26 | 42.26 | 46.23 | 54.00 | 7.77 | Average |
| | 5470.060 | 34.17 | 9.06 | 39.26 | 42.09 | 46.06 | 54.00 | 7.94 | Average |
| @ | 5721.850 | 33.80 | 9.19 | 39.30 | 87.40 | 91.09 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

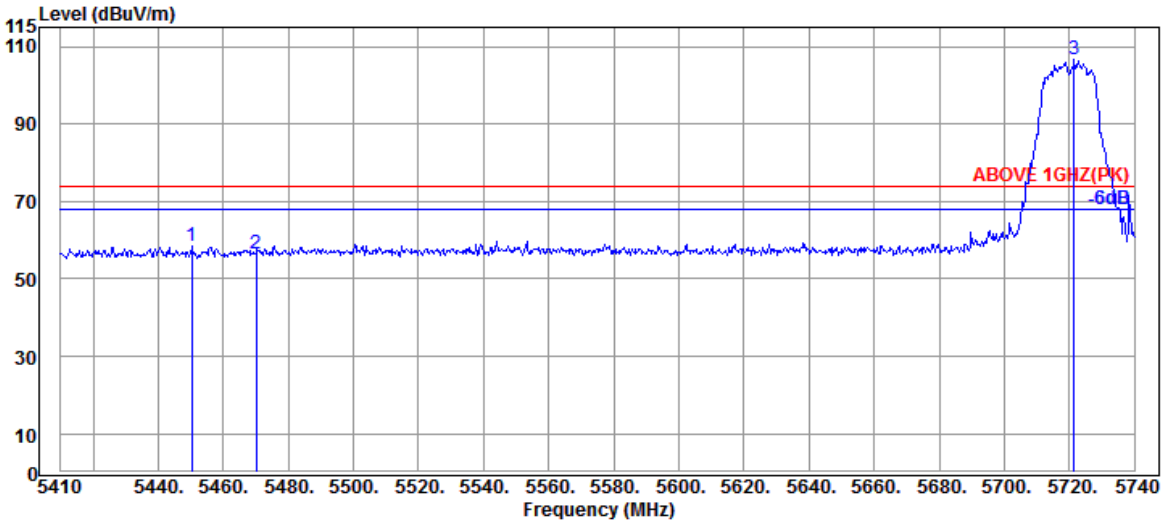


Antenna at Vertical Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5450.260 | 34.20 | 9.05 | 39.26 | 54.32 | 58.31 | 74.00 | 15.69 | Peak |
| | 5470.060 | 34.17 | 9.06 | 39.26 | 52.67 | 56.64 | 74.00 | 17.36 | Peak |
| @ | 5721.520 | 33.80 | 9.19 | 39.30 | 103.18 | 106.87 | --- | --- | Peak |

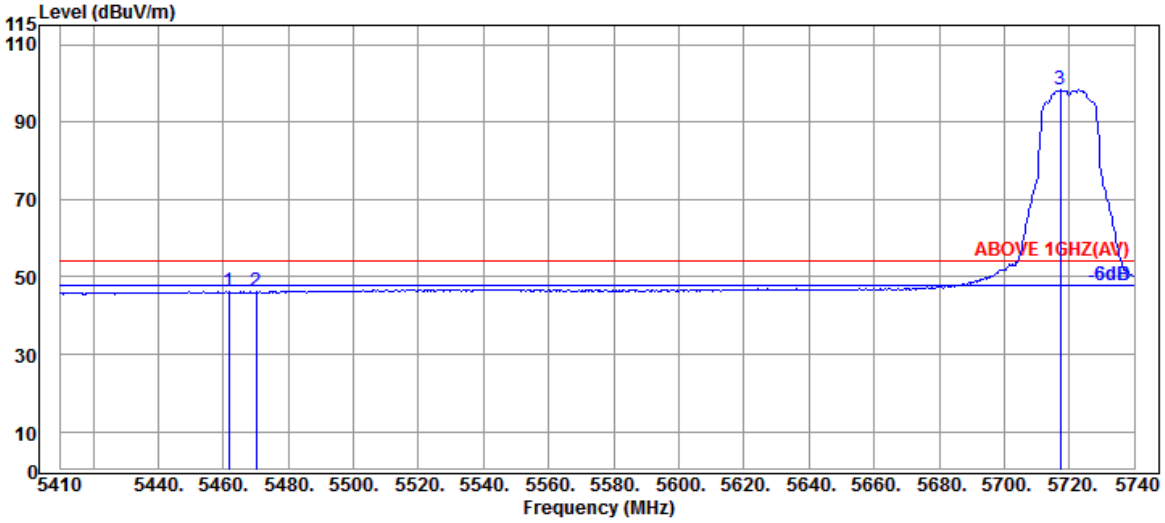


Antenna at Vertical Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5461.810 | 34.20 | 9.05 | 39.26 | 42.29 | 46.28 | 54.00 | 7.72 | Average |
| | 5470.060 | 34.17 | 9.06 | 39.26 | 42.07 | 46.04 | 54.00 | 7.96 | Average |
| @ | 5717.230 | 33.80 | 9.19 | 39.30 | 94.55 | 98.24 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

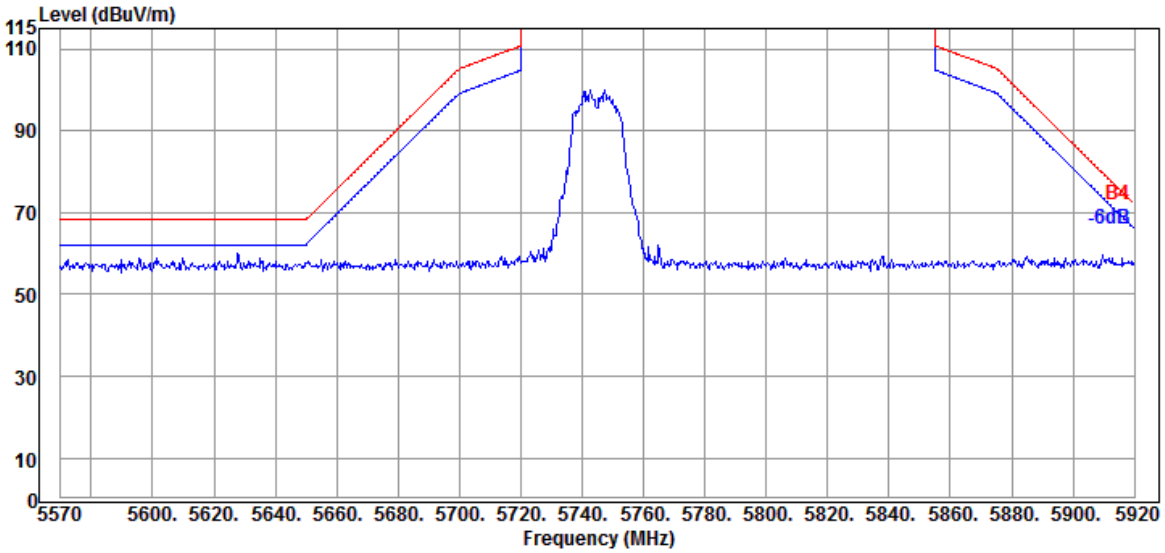


Antenna at Vertical Polarization

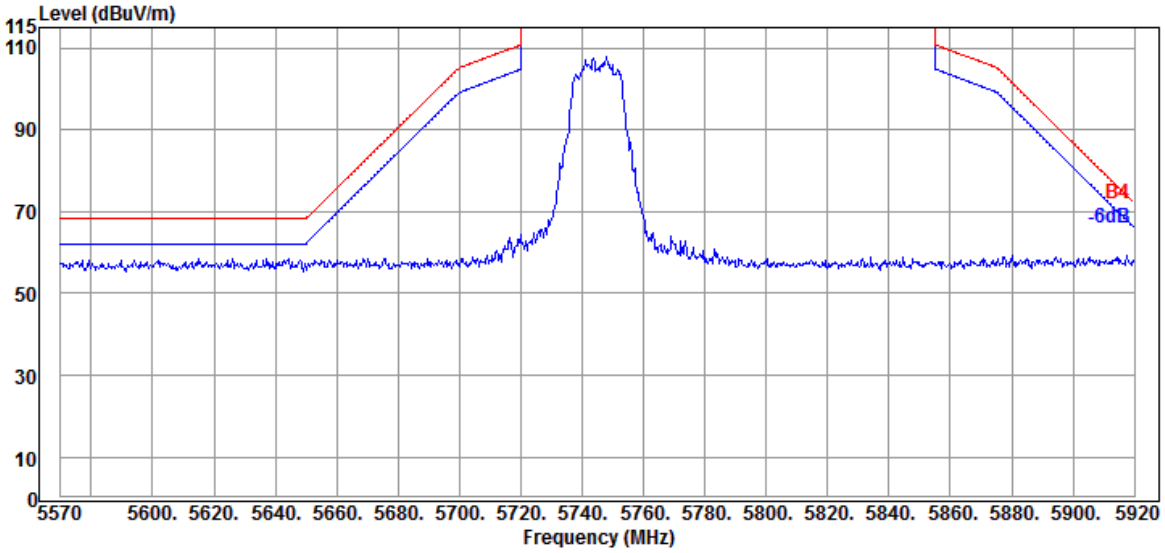




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11a | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

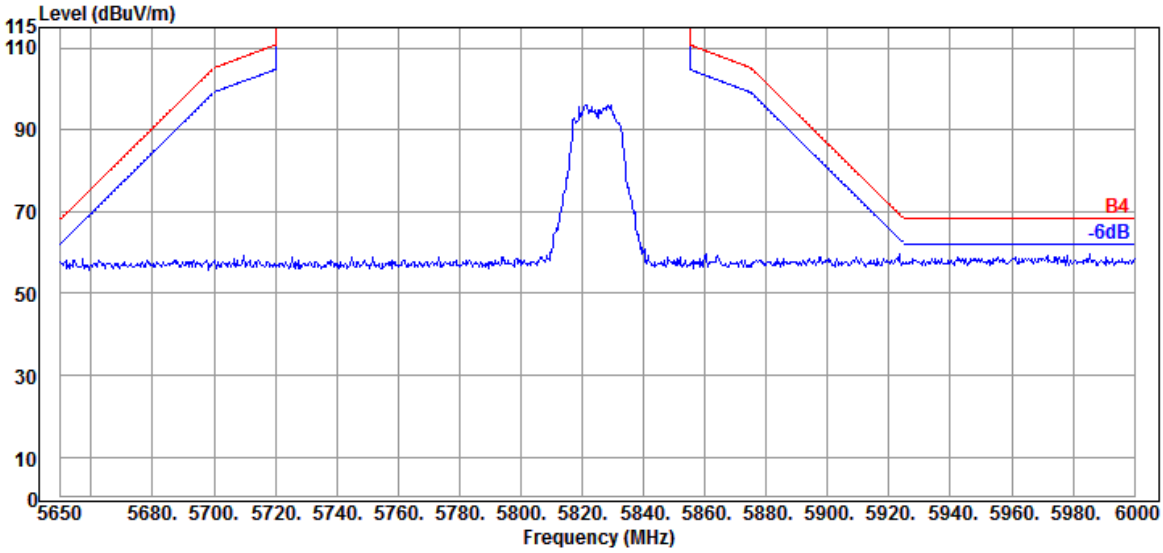


Antenna at Vertical Polarization

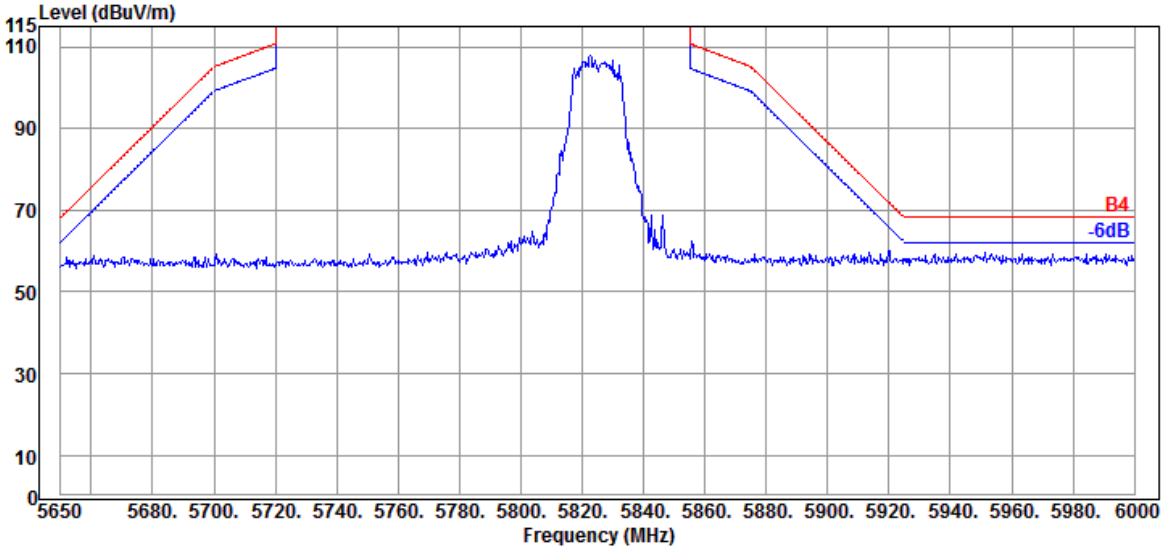




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5180MHz |

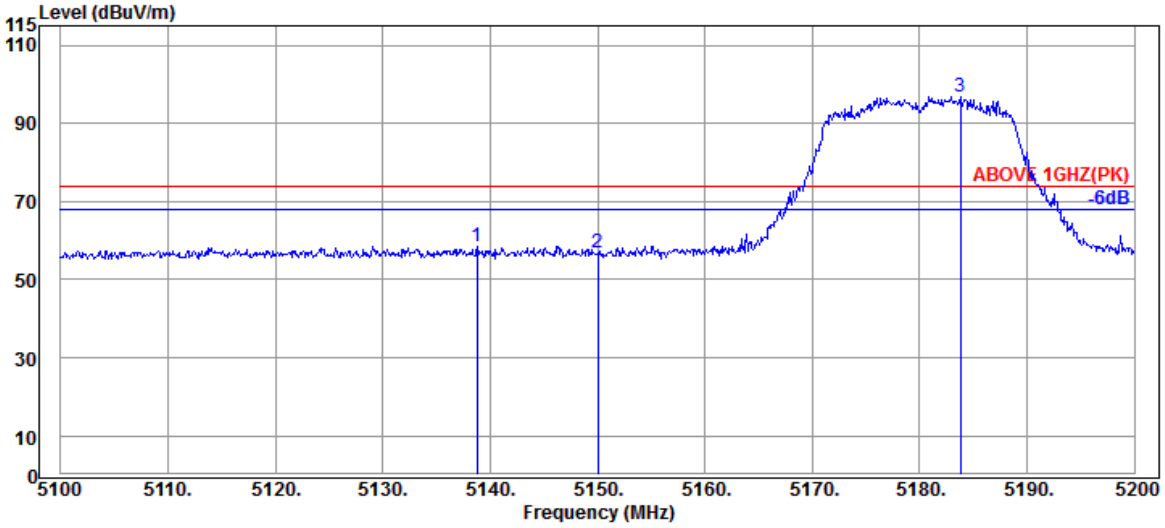


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5138.800 | 33.70 | 8.88 | 39.29 | 55.29 | 58.58 | 74.00 | 15.42 | Peak |
| | 5150.000 | 33.70 | 8.88 | 39.29 | 53.66 | 56.95 | 74.00 | 17.05 | Peak |
| @ | 5183.800 | 33.70 | 8.90 | 39.28 | 93.48 | 96.80 | --- | --- | Peak |

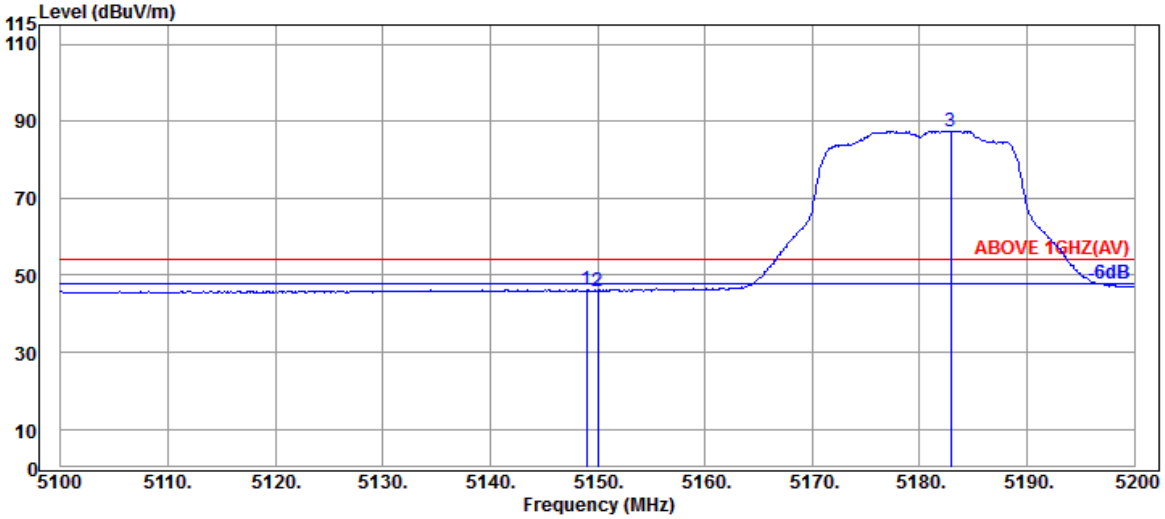


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5149.000 | 33.70 | 8.88 | 39.29 | 42.88 | 46.17 | 54.00 | 7.83 | Average |
| | 5150.000 | 33.70 | 8.88 | 39.29 | 42.74 | 46.03 | 54.00 | 7.97 | Average |
| @ | 5182.900 | 33.70 | 8.90 | 39.28 | 84.19 | 87.51 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5180MHz |

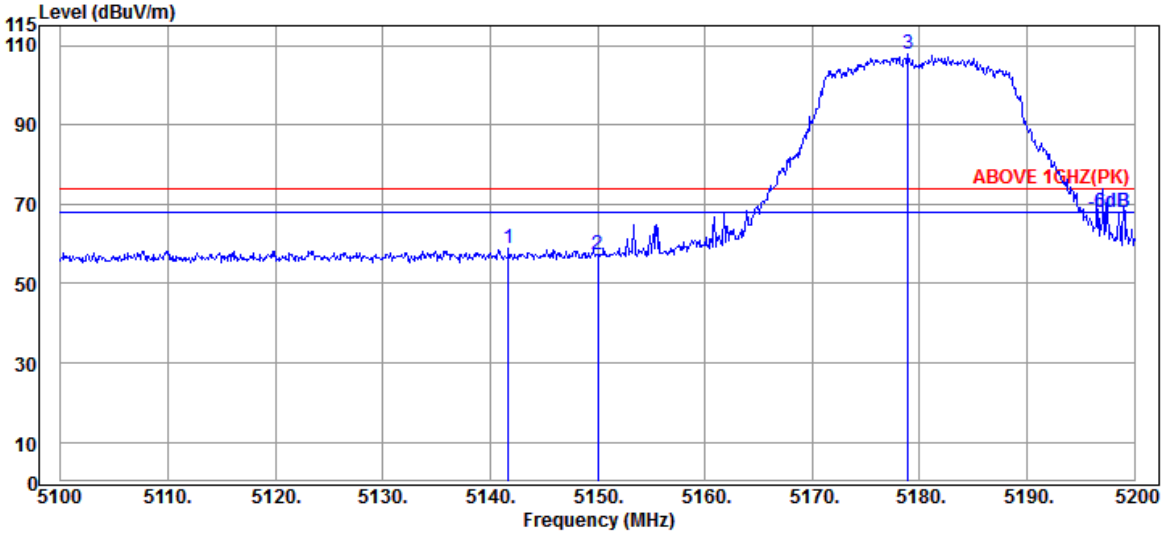


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5141.700 | 33.70 | 8.88 | 39.29 | 55.59 | 58.88 | 74.00 | 15.12 | Peak |
| 5150.000 | 33.70 | 8.88 | 39.29 | 53.83 | 57.12 | 74.00 | 16.88 | Peak |
| @ 5178.900 | 33.70 | 8.90 | 39.28 | 104.71 | 108.03 | --- | --- | Peak |

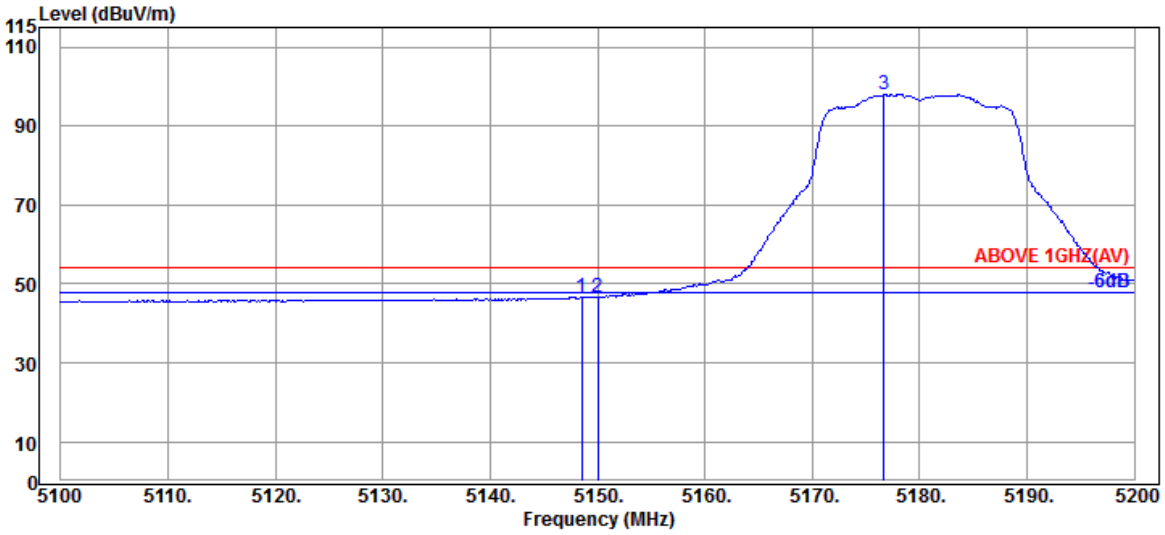


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5148.500 | 33.70 | 8.88 | 39.29 | 43.45 | 46.74 | 54.00 | 7.26 | Average |
| 5150.000 | 33.70 | 8.88 | 39.29 | 43.45 | 46.74 | 54.00 | 7.26 | Average |
| @ 5176.700 | 33.70 | 8.90 | 39.28 | 94.67 | 97.99 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5320MHz |

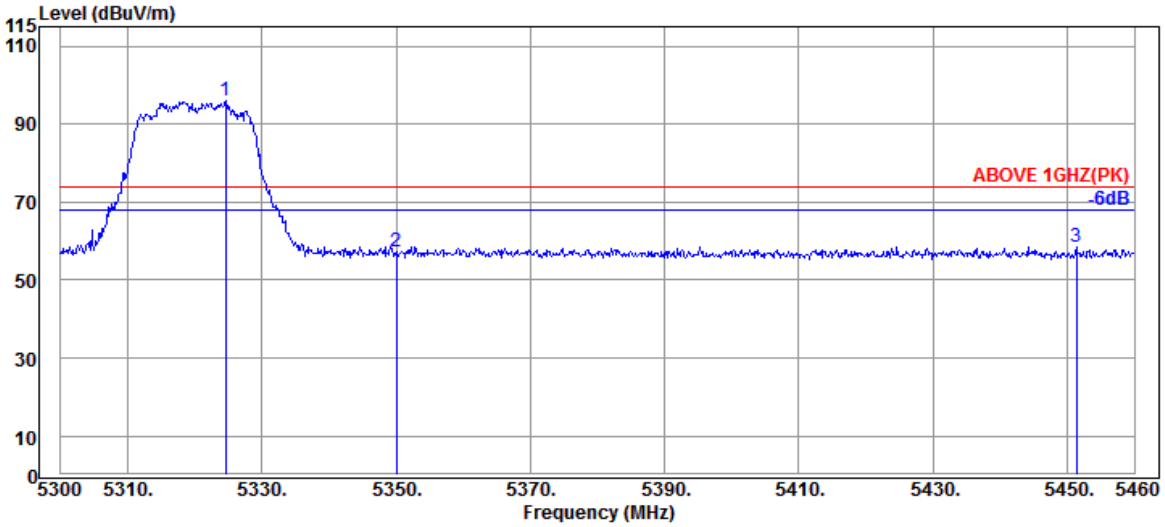


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5324.640 | 33.97 | 8.99 | 39.27 | 92.41 | 96.10 | --- | --- | Peak |
| 5350.080 | 33.90 | 8.99 | 39.27 | 53.65 | 57.27 | 74.00 | 16.73 | Peak |
| 5451.360 | 34.20 | 9.05 | 39.26 | 54.59 | 58.58 | 74.00 | 15.42 | Peak |

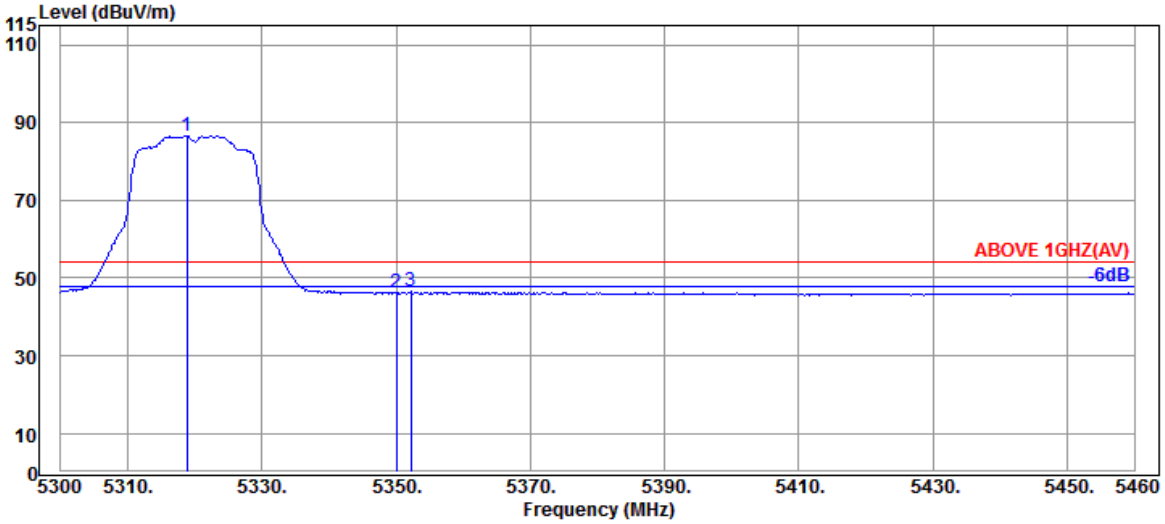


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5318.880 | 34.03 | 8.98 | 39.27 | 82.81 | 86.55 | --- | --- | Average |
| 5350.080 | 33.90 | 8.99 | 39.27 | 42.54 | 46.16 | 54.00 | 7.84 | Average |
| 5352.160 | 33.90 | 8.99 | 39.27 | 42.84 | 46.46 | 54.00 | 7.54 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5320MHz |

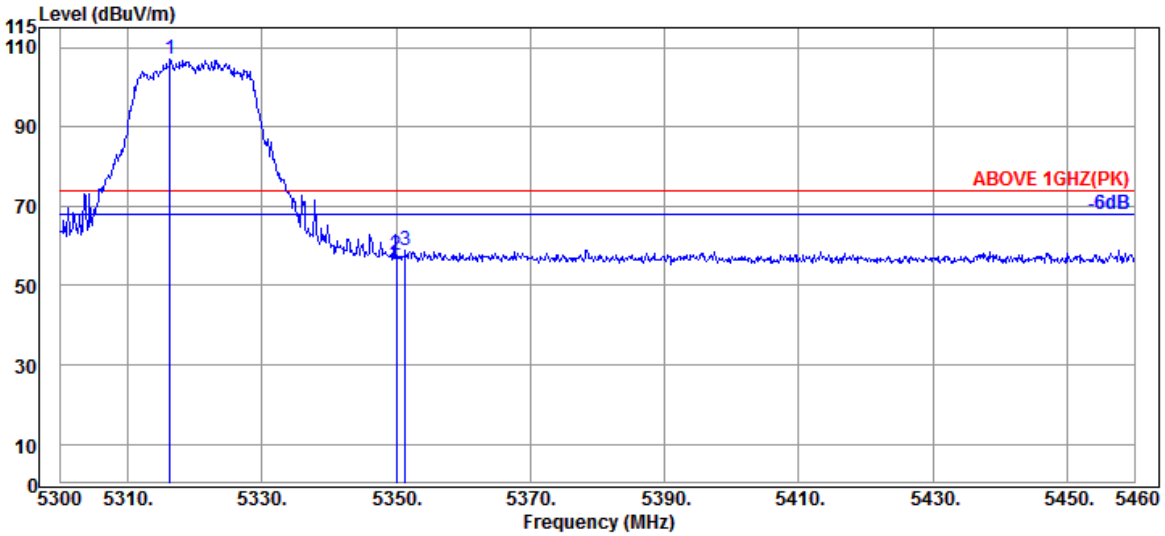


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5316.320 | 34.03 | 8.98 | 39.27 | 103.34 | 107.08 | --- | --- | Peak |
| 5350.080 | 33.90 | 8.99 | 39.27 | 54.25 | 57.87 | 74.00 | 16.13 | Peak |
| 5351.360 | 33.90 | 8.99 | 39.27 | 55.43 | 59.05 | 74.00 | 14.95 | Peak |

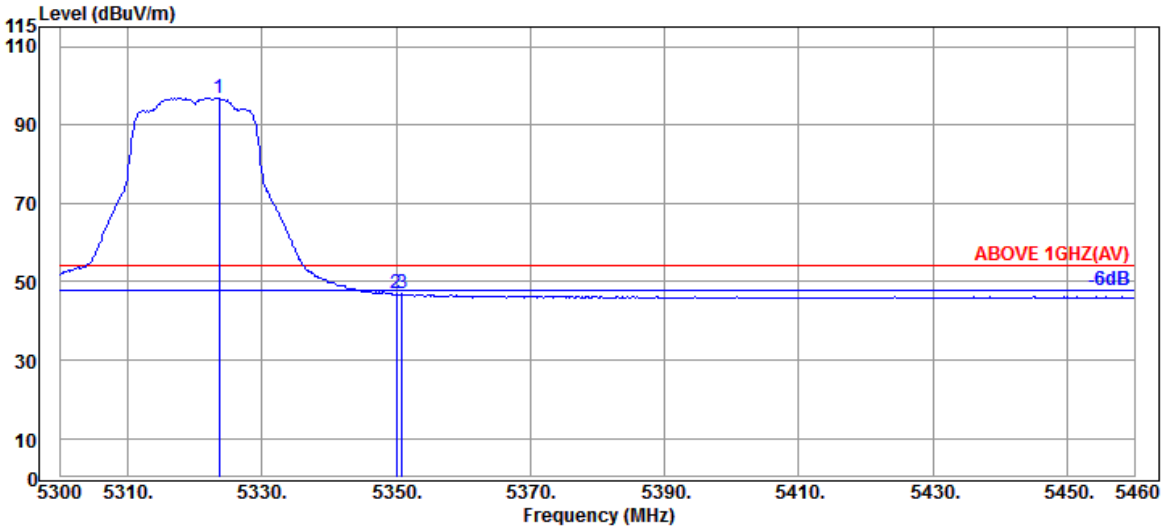


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5323.680 | 33.97 | 8.99 | 39.27 | 93.25 | 96.94 | --- | --- | Average |
| 5350.080 | 33.90 | 8.99 | 39.27 | 43.28 | 46.90 | 54.00 | 7.10 | Average |
| 5350.880 | 33.90 | 8.99 | 39.27 | 43.36 | 46.98 | 54.00 | 7.02 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5500MHz |

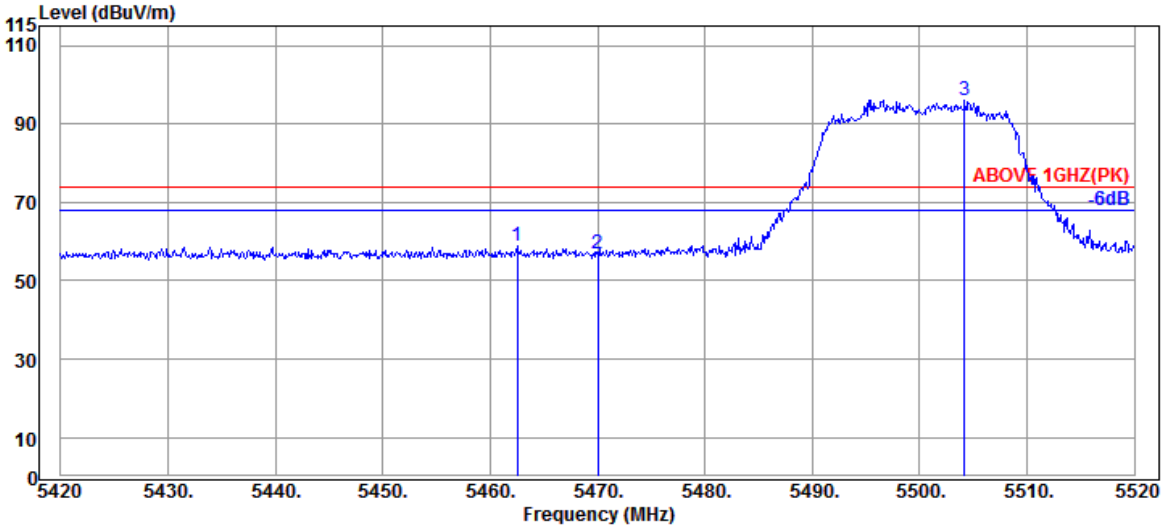


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5462.500 | 34.20 | 9.05 | 39.26 | 54.99 | 58.98 | 74.00 | 15.02 | Peak |
| 5470.000 | 34.17 | 9.06 | 39.26 | 52.95 | 56.92 | 74.00 | 17.08 | Peak |
| @ 5504.200 | 34.10 | 9.08 | 39.26 | 92.21 | 96.13 | --- | --- | Peak |

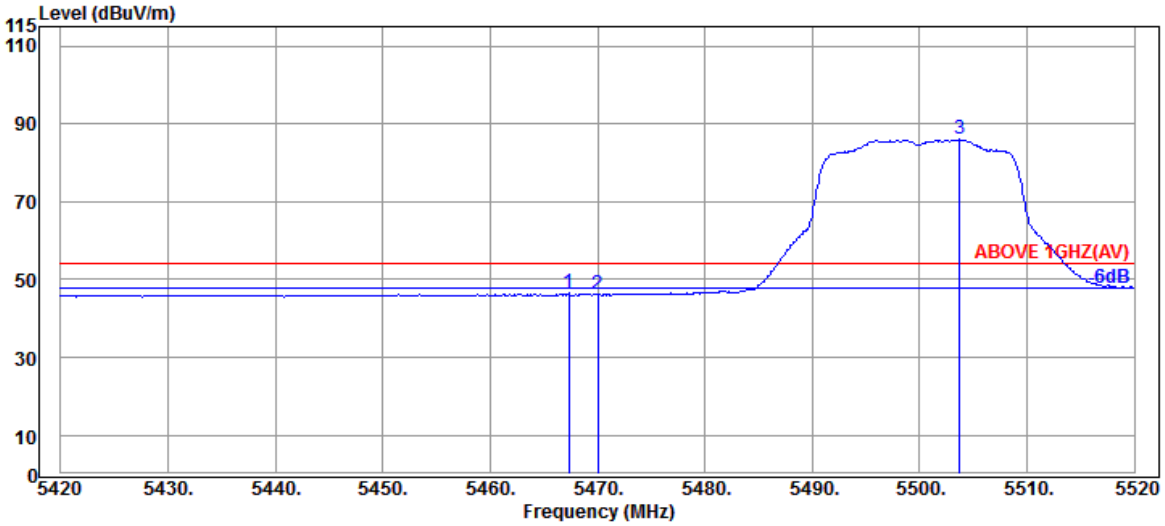


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5467.300 | 34.17 | 9.06 | 39.26 | 42.52 | 46.49 | 54.00 | 7.51 | Average |
| 5470.000 | 34.17 | 9.06 | 39.26 | 42.10 | 46.07 | 54.00 | 7.93 | Average |
| @ 5503.700 | 34.10 | 9.08 | 39.26 | 82.04 | 85.96 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5500MHz |

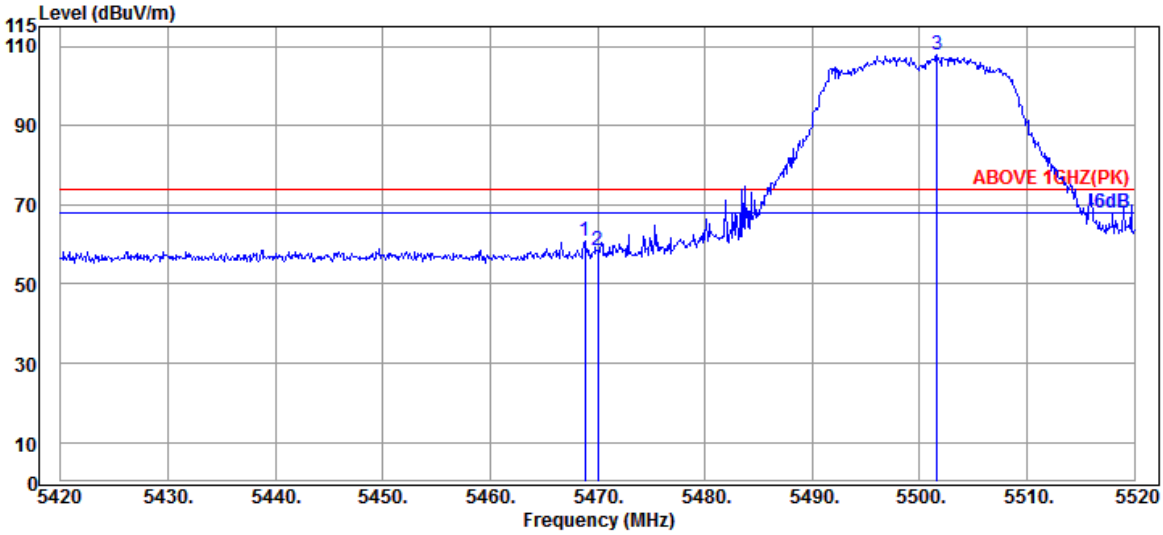


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.800 | 34.17 | 9.06 | 39.26 | 56.93 | 60.90 | 74.00 | 13.10 | Peak |
| 5470.000 | 34.17 | 9.06 | 39.26 | 54.37 | 58.34 | 74.00 | 15.66 | Peak |
| @ 5501.600 | 34.10 | 9.08 | 39.26 | 103.89 | 107.81 | --- | --- | Peak |

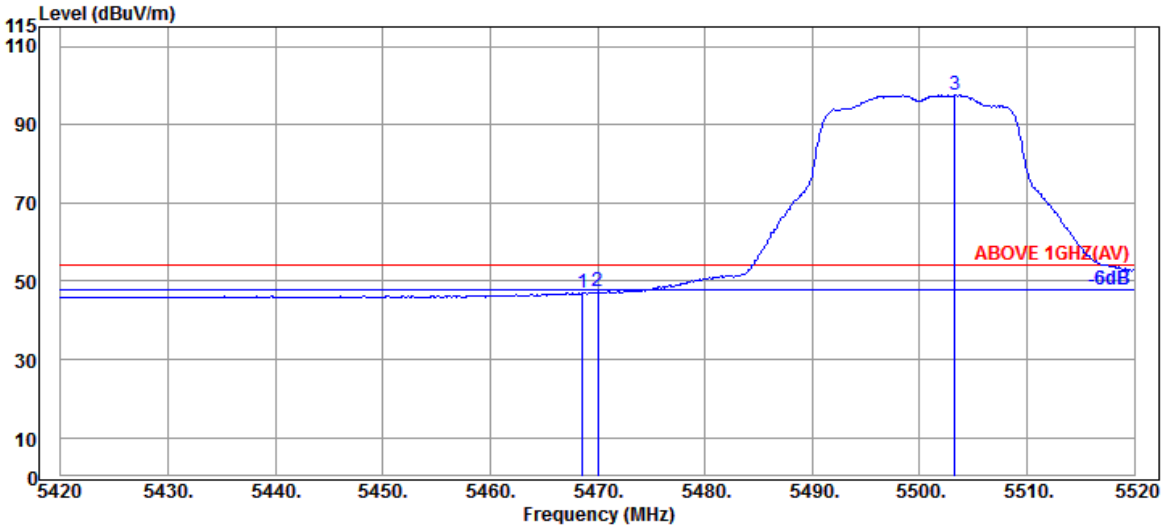


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.600 | 34.17 | 9.06 | 39.26 | 43.03 | 47.00 | 54.00 | 7.00 | Average |
| 5470.000 | 34.17 | 9.06 | 39.26 | 43.30 | 47.27 | 54.00 | 6.73 | Average |
| @ 5503.300 | 34.10 | 9.08 | 39.26 | 93.66 | 97.58 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5700MHz |

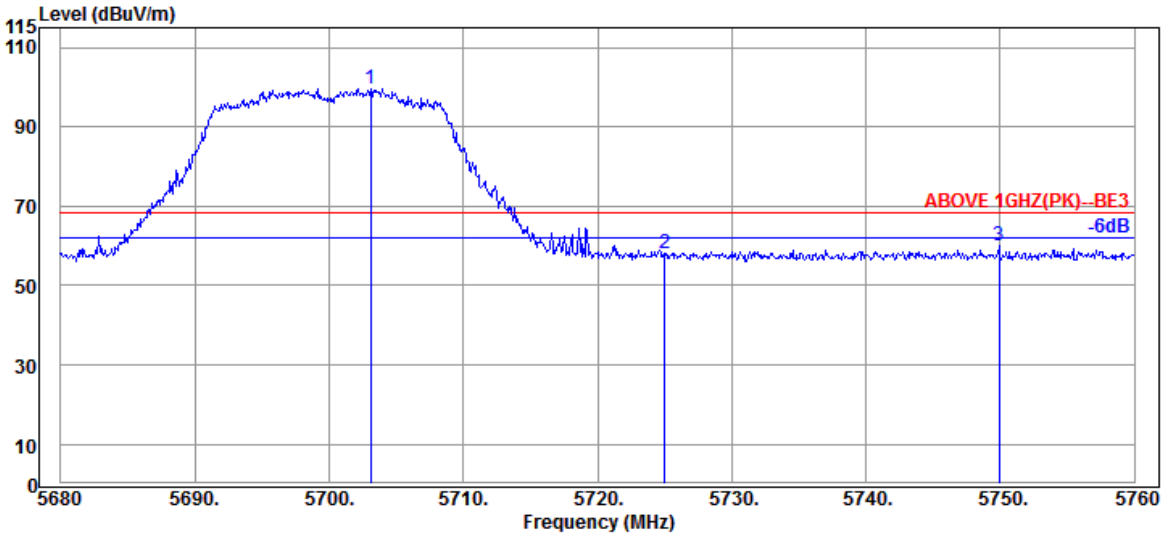


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5703.120 | 33.80 | 9.18 | 39.30 | 96.05 | 99.73 | --- | --- | Peak |
| 5725.040 | 33.80 | 9.20 | 39.30 | 54.39 | 58.09 | 68.20 | 10.11 | Peak |
| 5749.920 | 33.80 | 9.20 | 39.31 | 56.23 | 59.92 | 68.20 | 8.28 | Peak |

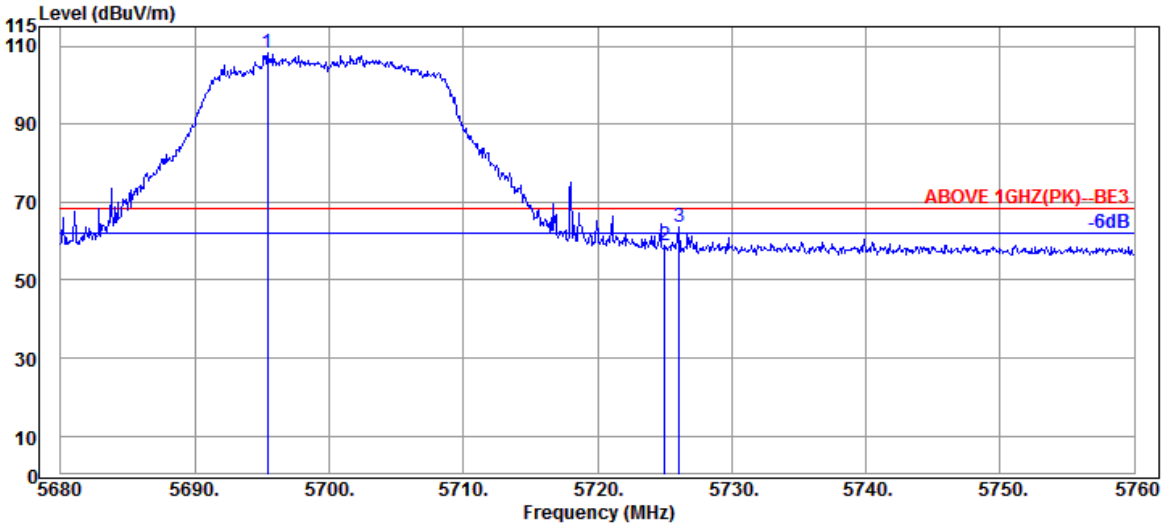


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5695.440 | 33.80 | 9.18 | 39.30 | 104.44 | 108.12 | --- | --- | Peak |
| 5725.040 | 33.80 | 9.20 | 39.30 | 55.10 | 58.80 | 68.20 | 9.40 | Peak |
| 5726.080 | 33.80 | 9.20 | 39.30 | 60.08 | 63.78 | 68.20 | 4.42 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

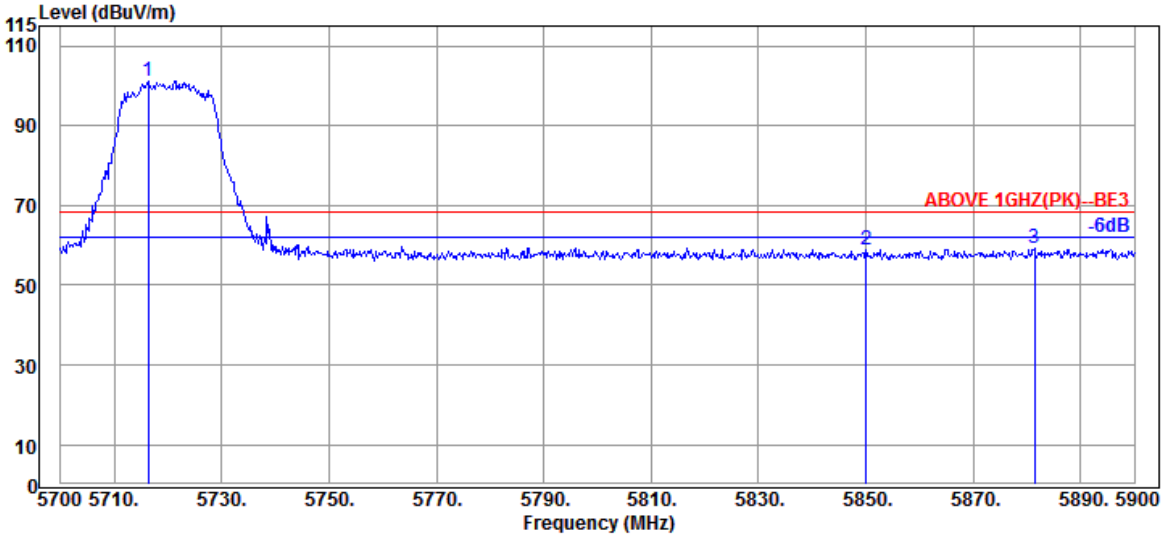


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5716.400 | 33.80 | 9.19 | 39.30 | 97.58 | 101.27 | --- | --- | Peak |
| 5850.000 | 34.10 | 9.25 | 39.33 | 54.70 | 58.72 | 68.20 | 9.48 | Peak |
| 5881.400 | 34.10 | 9.27 | 39.34 | 55.11 | 59.14 | 68.20 | 9.06 | Peak |

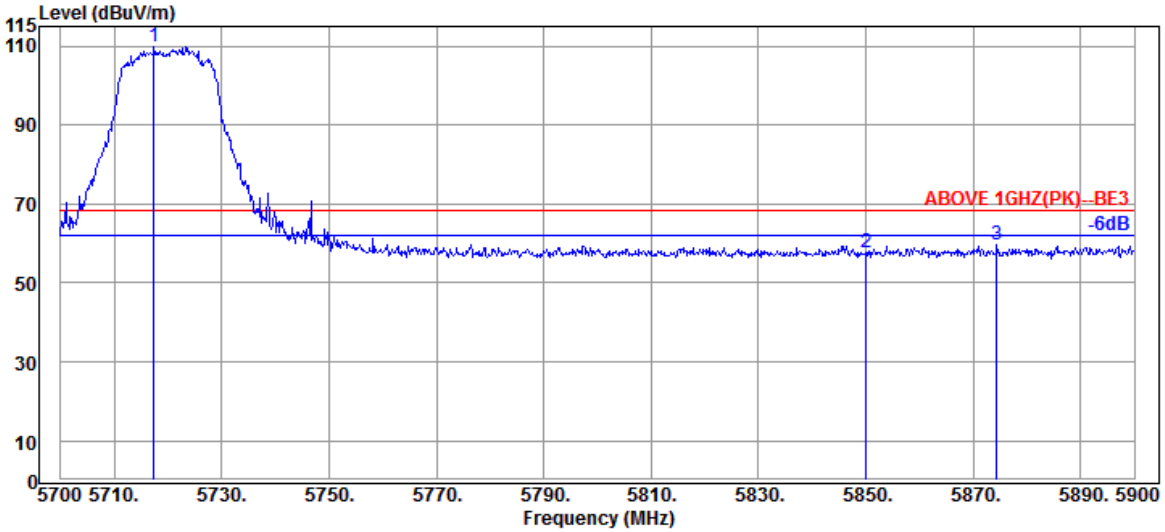


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5717.400 | 33.80 | 9.19 | 39.30 | 106.28 | 109.97 | --- | --- | Peak |
| 5850.000 | 34.10 | 9.25 | 39.33 | 53.66 | 57.68 | 68.20 | 10.52 | Peak |
| 5874.400 | 34.10 | 9.27 | 39.33 | 55.52 | 59.56 | 68.20 | 8.64 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

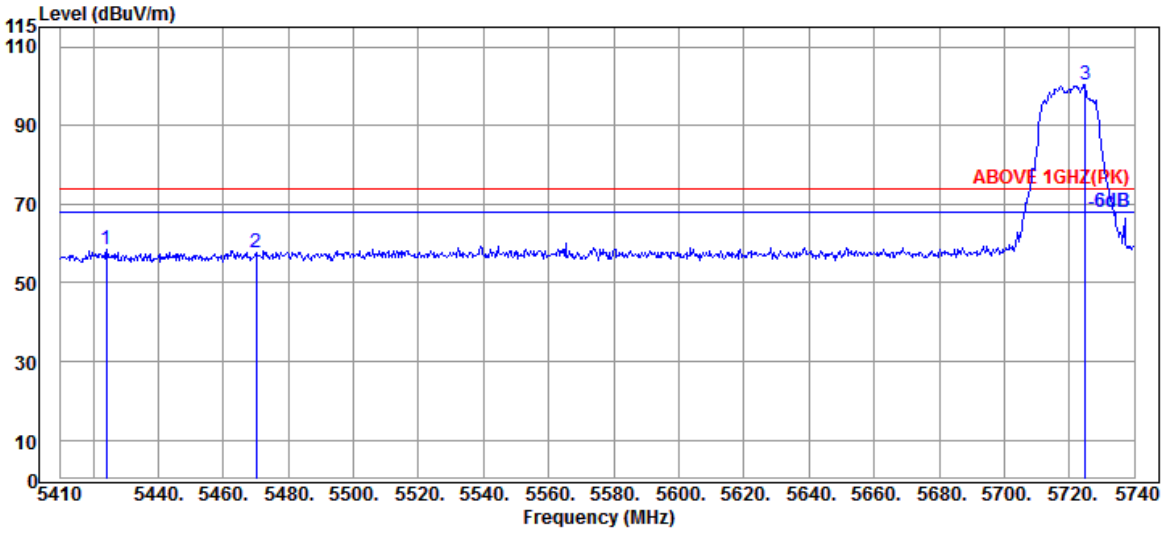


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5424.190 | 34.15 | 9.04 | 39.27 | 54.62 | 58.54 | 74.00 | 15.46 | Peak |
| | 5470.060 | 34.17 | 9.06 | 39.26 | 53.57 | 57.54 | 74.00 | 16.46 | Peak |
| @ | 5724.820 | 33.80 | 9.20 | 39.30 | 96.59 | 100.29 | --- | --- | Peak |

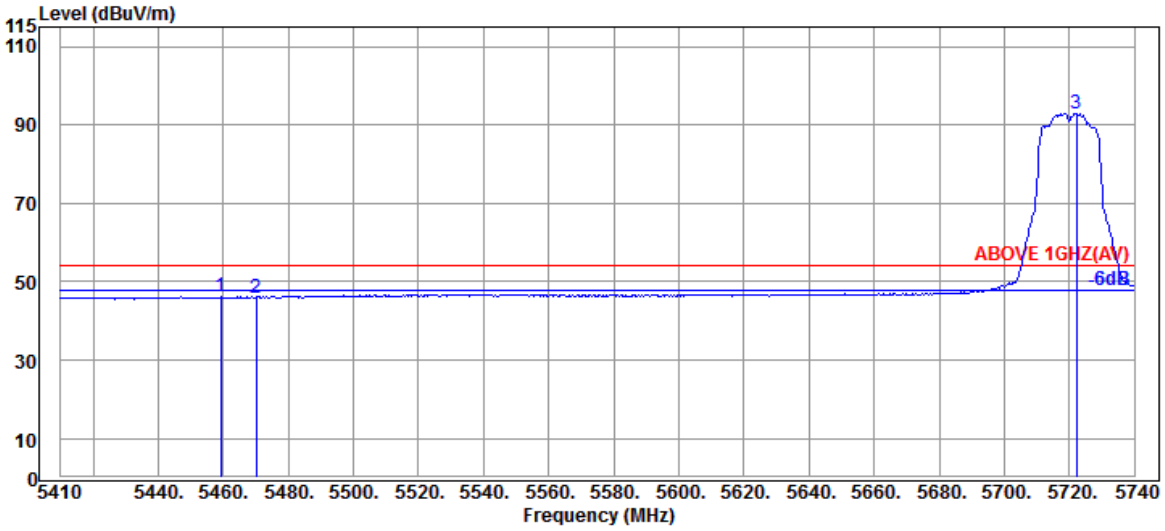


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5459.170 | 34.20 | 9.05 | 39.26 | 42.18 | 46.17 | 54.00 | 7.83 | Average |
| | 5470.060 | 34.17 | 9.06 | 39.26 | 41.99 | 45.96 | 54.00 | 8.04 | Average |
| @ | 5722.180 | 33.80 | 9.20 | 39.30 | 89.18 | 92.88 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

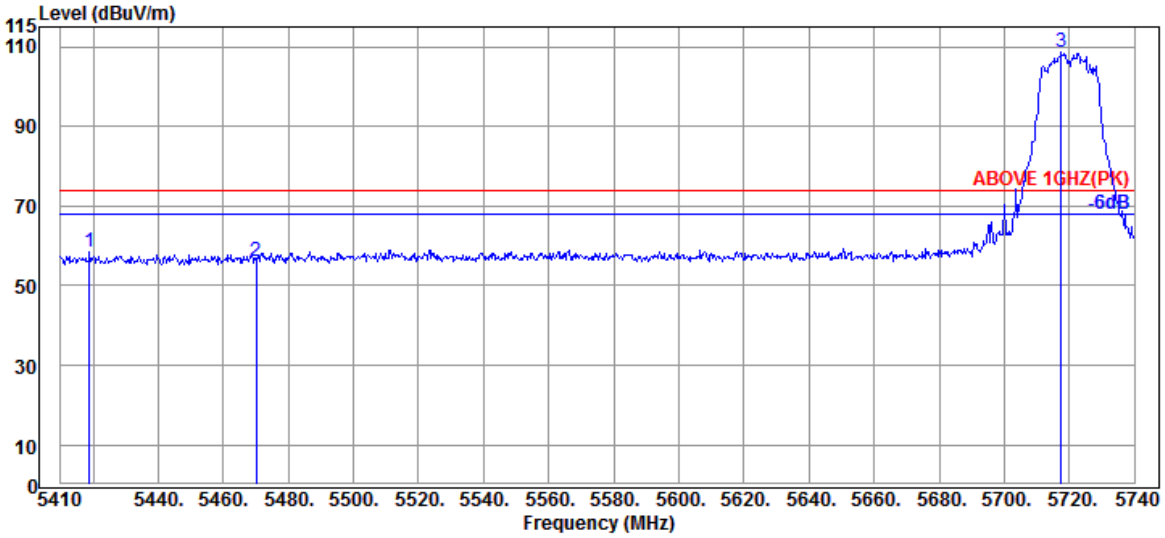


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5418.910 | 34.15 | 9.04 | 39.27 | 54.38 | 58.30 | 74.00 | 15.70 | Peak |
| 5470.060 | 34.17 | 9.06 | 39.26 | 52.03 | 56.00 | 74.00 | 18.00 | Peak |
| @ 5717.560 | 33.80 | 9.19 | 39.30 | 105.00 | 108.69 | --- | --- | Peak |

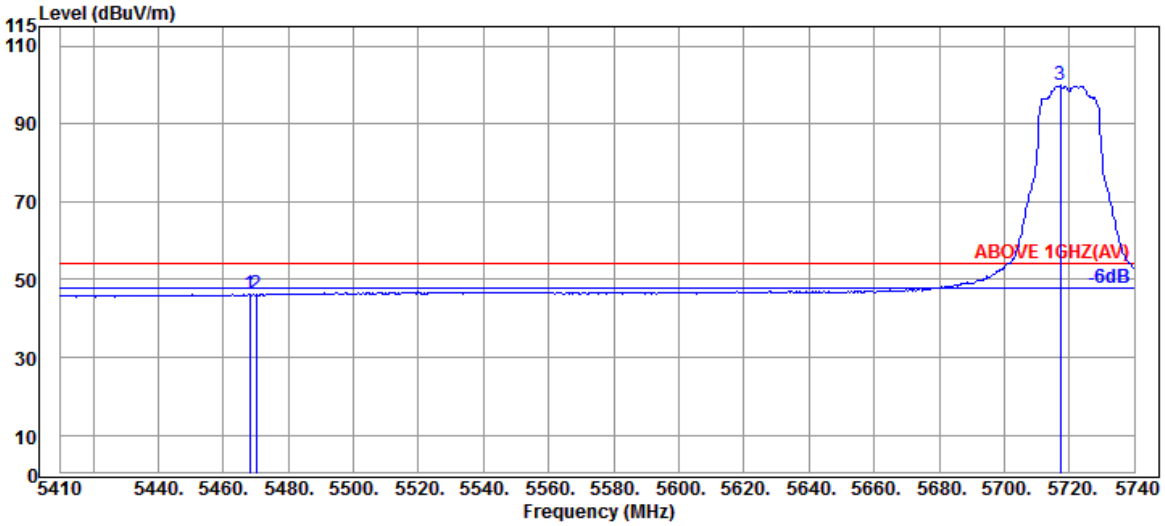


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.080 | 34.17 | 9.06 | 39.26 | 42.20 | 46.17 | 54.00 | 7.83 | Average |
| 5470.060 | 34.17 | 9.06 | 39.26 | 42.15 | 46.12 | 54.00 | 7.88 | Average |
| @ 5717.230 | 33.80 | 9.19 | 39.30 | 96.11 | 99.80 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

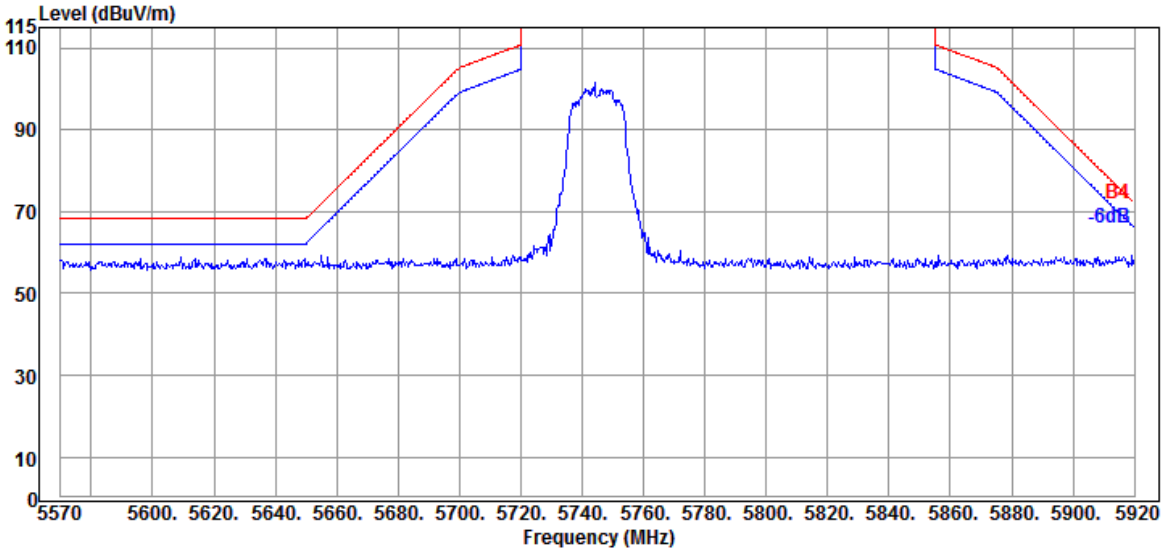


Antenna at Vertical Polarization

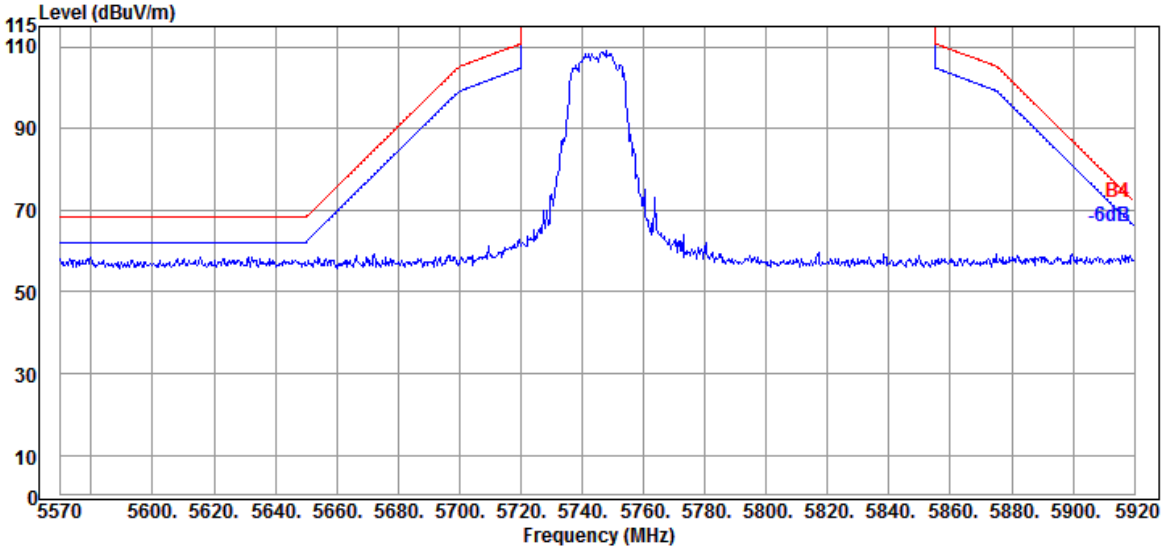




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT20 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

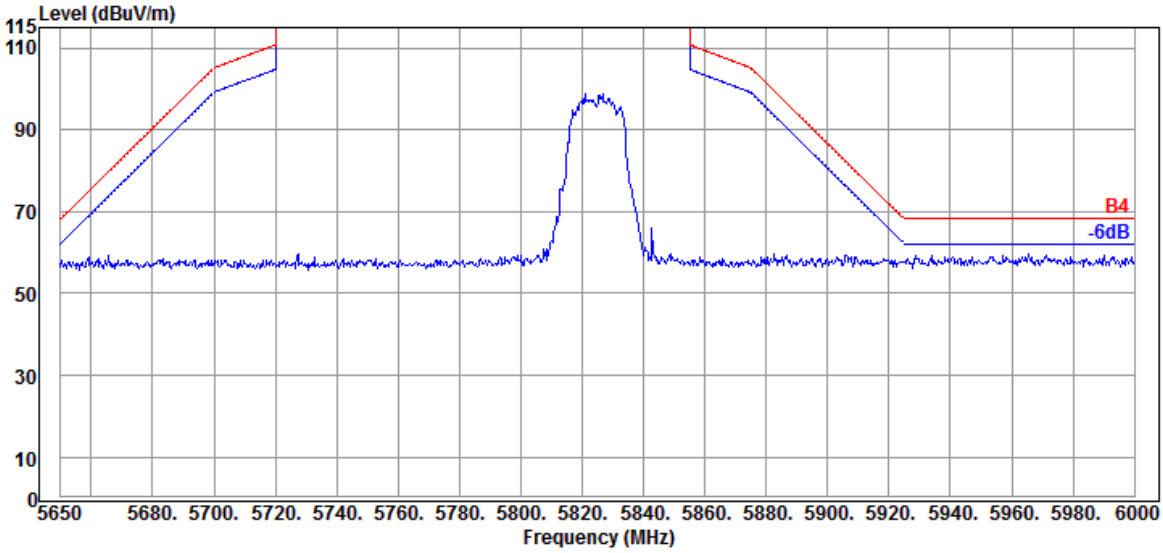


Antenna at Vertical Polarization

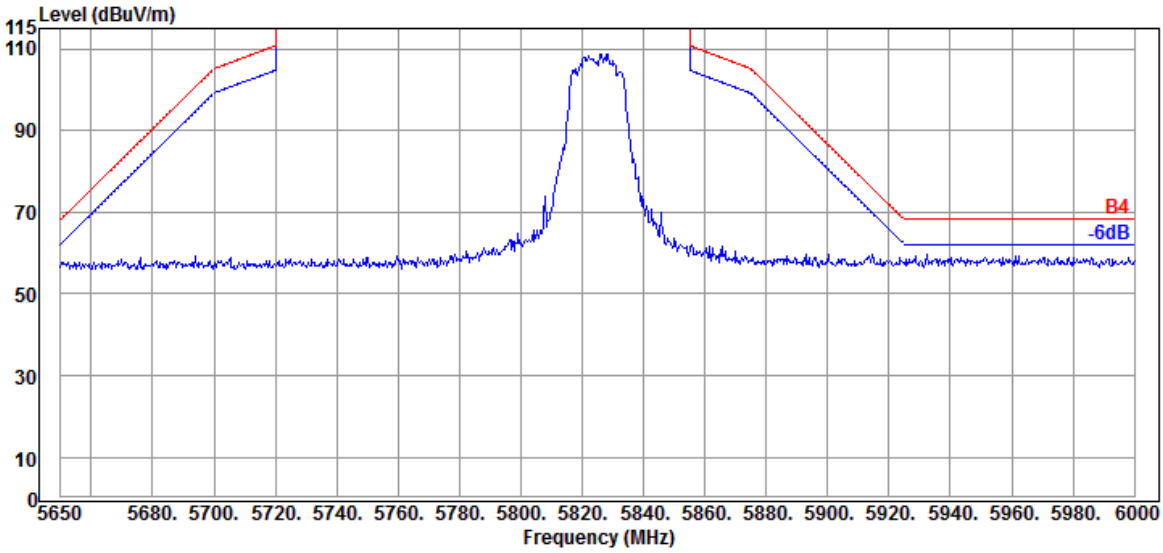




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5190MHz |

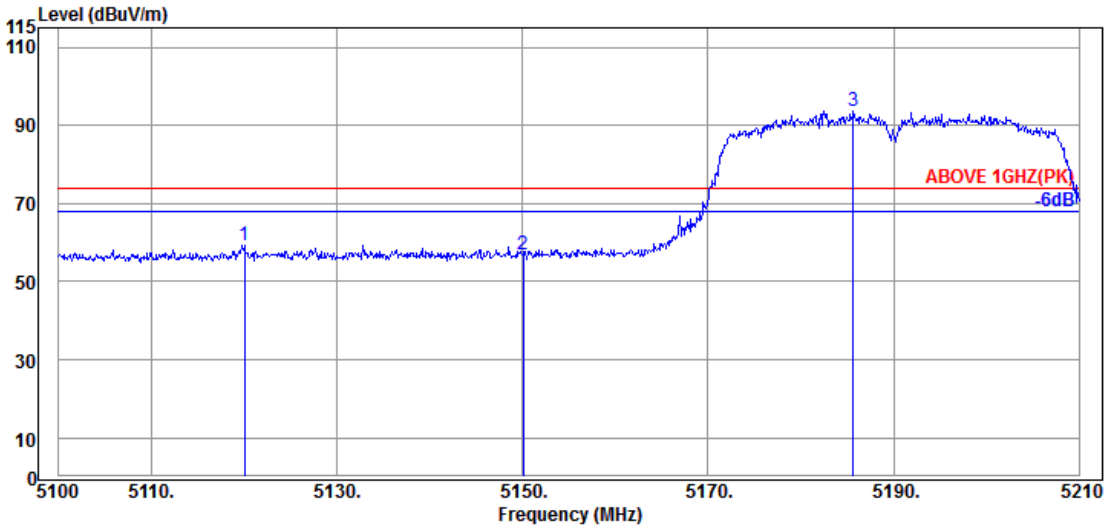


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5120.020 | 33.70 | 8.87 | 39.29 | 55.98 | 59.26 | 74.00 | 14.74 | Peak |
| 5150.050 | 33.70 | 8.88 | 39.29 | 53.75 | 57.04 | 74.00 | 16.96 | Peak |
| @ 5185.690 | 33.70 | 8.90 | 39.28 | 90.54 | 93.86 | --- | --- | Peak |

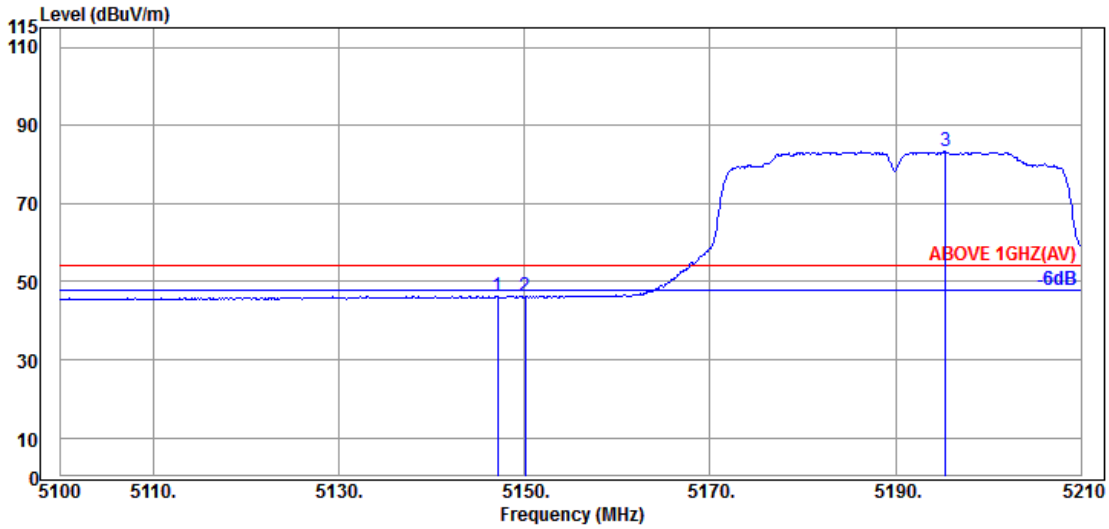


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5147.080 | 33.70 | 8.88 | 39.29 | 42.90 | 46.19 | 54.00 | 7.81 | Average |
| 5150.050 | 33.70 | 8.88 | 39.29 | 42.78 | 46.07 | 54.00 | 7.93 | Average |
| @ 5195.370 | 33.70 | 8.91 | 39.28 | 79.93 | 83.26 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5190MHz |

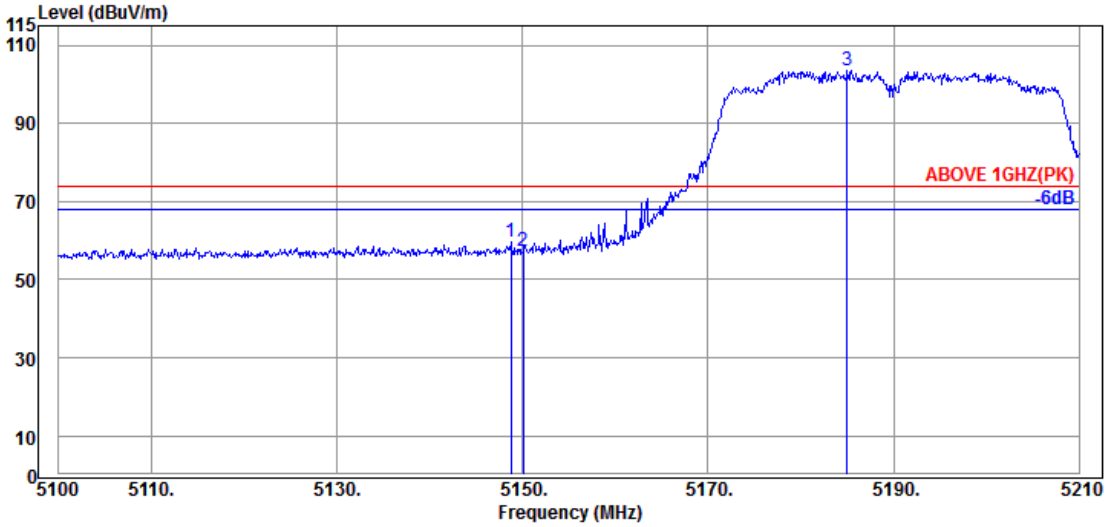


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5148.730 | 33.70 | 8.88 | 39.29 | 56.26 | 59.55 | 74.00 | 14.45 | Peak |
| 5150.050 | 33.70 | 8.88 | 39.29 | 53.84 | 57.13 | 74.00 | 16.87 | Peak |
| @ 5185.030 | 33.70 | 8.90 | 39.28 | 100.15 | 103.47 | --- | --- | Peak |

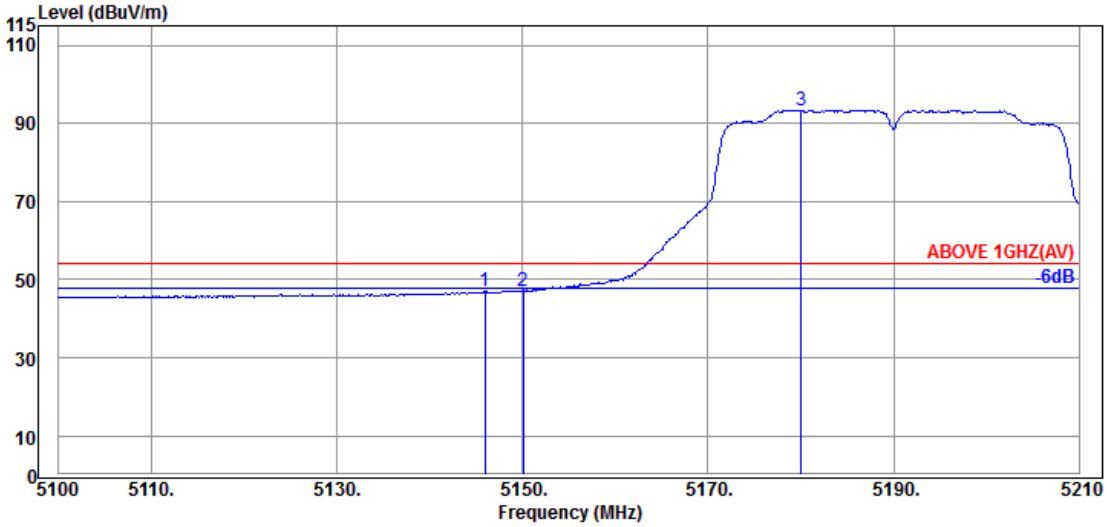


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5145.980 | 33.70 | 8.88 | 39.29 | 43.91 | 47.20 | 54.00 | 6.80 | Average |
| 5150.050 | 33.70 | 8.88 | 39.29 | 43.75 | 47.04 | 54.00 | 6.96 | Average |
| @ 5180.080 | 33.70 | 8.90 | 39.28 | 90.12 | 93.44 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5310MHz |

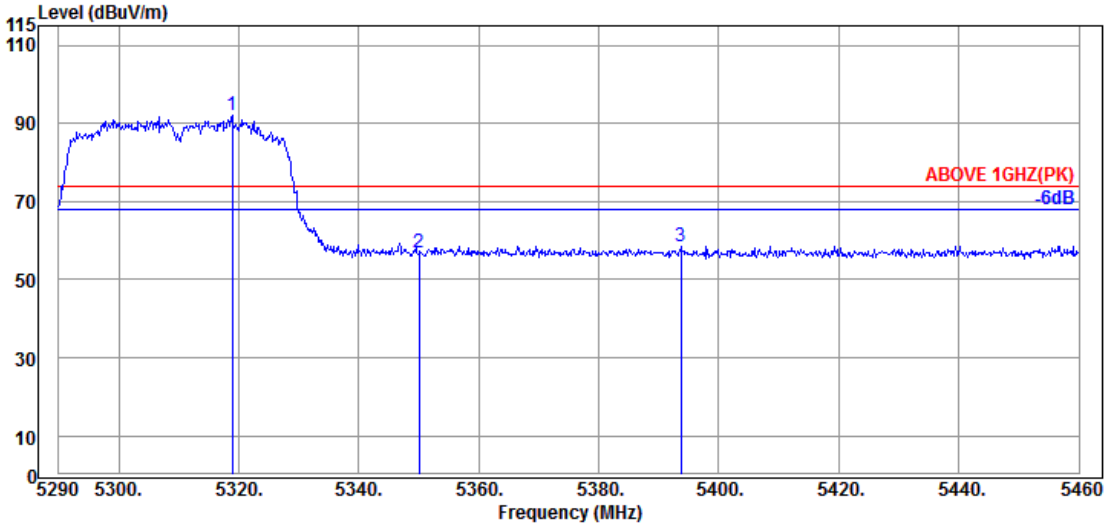


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5318.900 | 34.03 | 8.98 | 39.27 | 88.26 | 92.00 | --- | --- | Peak |
| 5350.010 | 33.90 | 8.99 | 39.27 | 53.39 | 57.01 | 74.00 | 16.99 | Peak |
| 5393.700 | 34.10 | 9.02 | 39.27 | 54.83 | 58.68 | 74.00 | 15.32 | Peak |

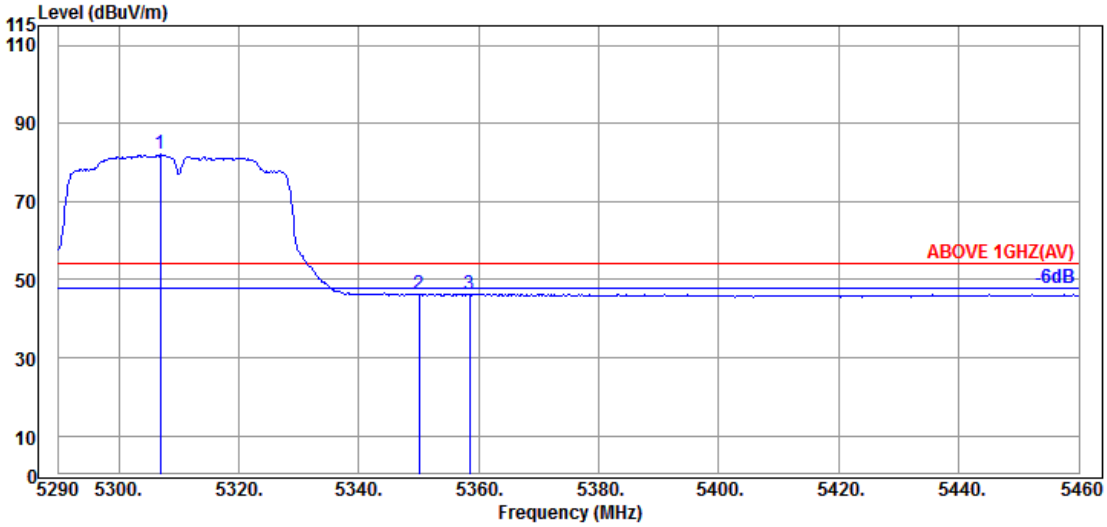


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5307.000 | 34.10 | 8.97 | 39.28 | 78.22 | 82.01 | --- | --- | Average |
| 5350.010 | 33.90 | 8.99 | 39.27 | 42.58 | 46.20 | 54.00 | 7.80 | Average |
| 5358.510 | 33.97 | 9.00 | 39.27 | 42.68 | 46.38 | 54.00 | 7.62 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5310MHz |

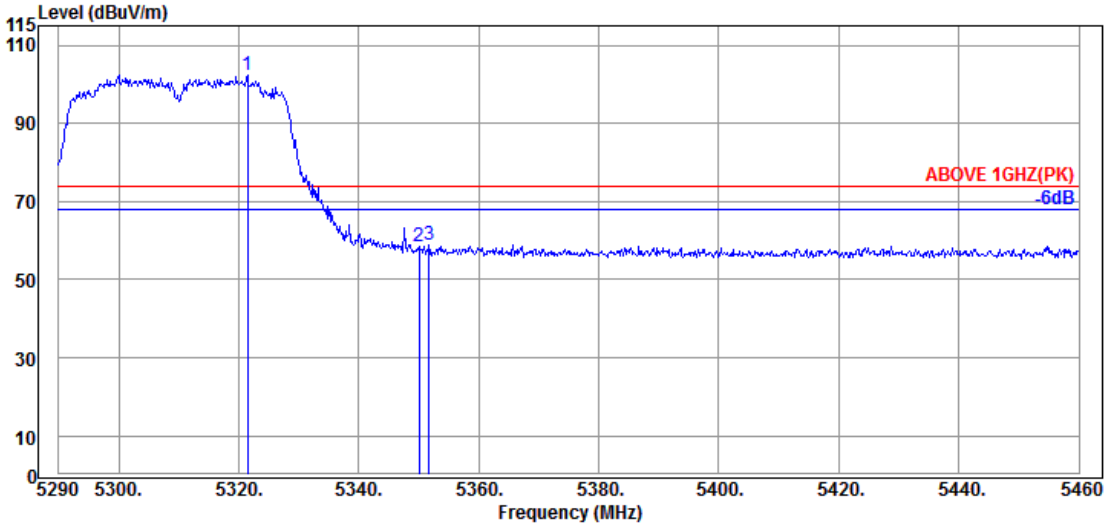


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5321.450 | 34.03 | 8.98 | 39.27 | 98.81 | 102.55 | --- | --- | Peak |
| 5350.010 | 33.90 | 8.99 | 39.27 | 54.77 | 58.39 | 74.00 | 15.61 | Peak |
| 5351.710 | 33.90 | 8.99 | 39.27 | 55.44 | 59.06 | 74.00 | 14.94 | Peak |

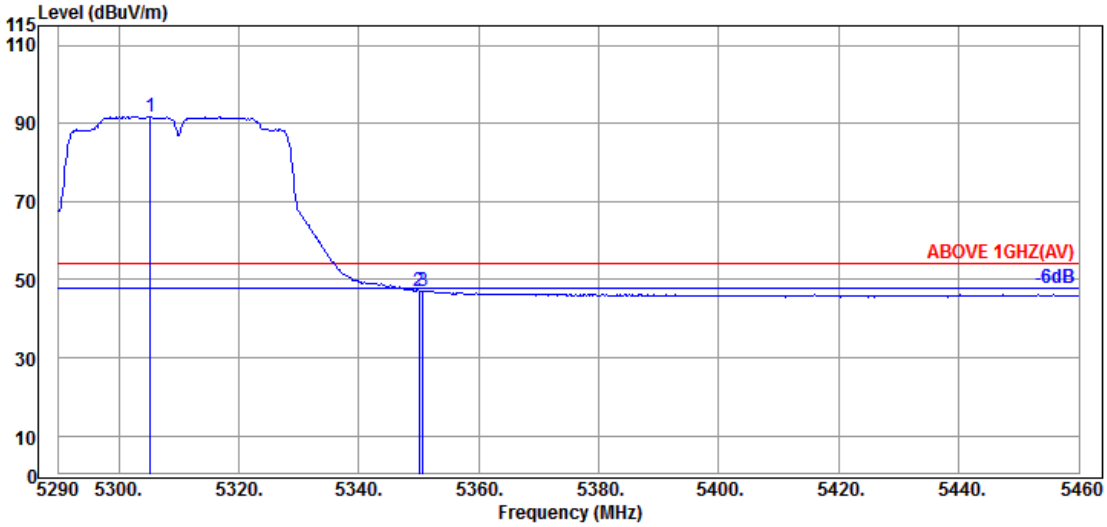


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5305.300 | 34.10 | 8.97 | 39.28 | 87.92 | 91.71 | --- | --- | Average |
| 5350.010 | 33.90 | 8.99 | 39.27 | 43.46 | 47.08 | 54.00 | 6.92 | Average |
| 5350.690 | 33.90 | 8.99 | 39.27 | 43.54 | 47.16 | 54.00 | 6.84 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5510MHz |

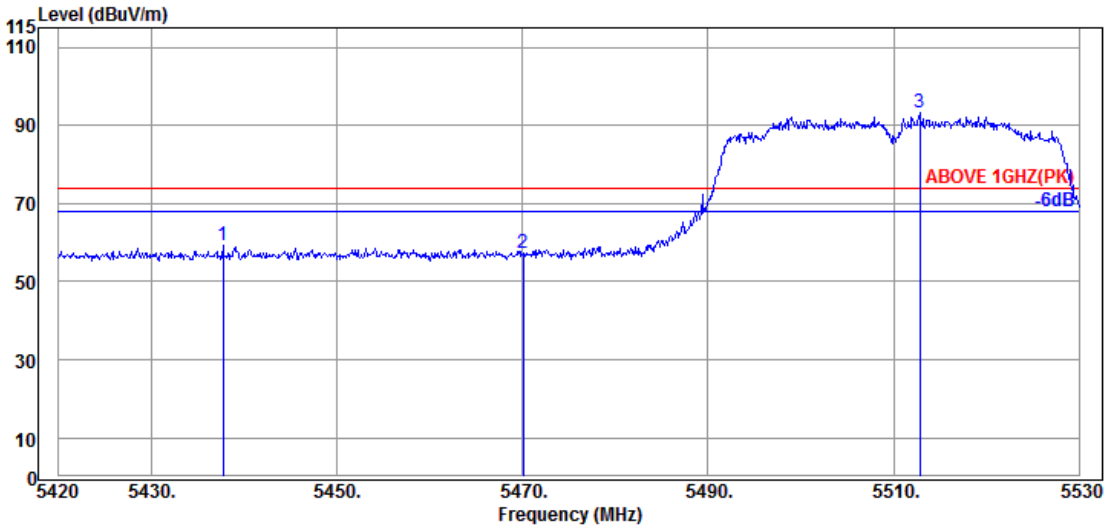


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5437.710 | 34.17 | 9.04 | 39.26 | 55.27 | 59.22 | 74.00 | 14.78 | Peak |
| | 5470.050 | 34.17 | 9.06 | 39.26 | 53.40 | 57.37 | 74.00 | 16.63 | Peak |
| @ | 5512.840 | 34.10 | 9.09 | 39.26 | 89.49 | 93.42 | --- | --- | Peak |

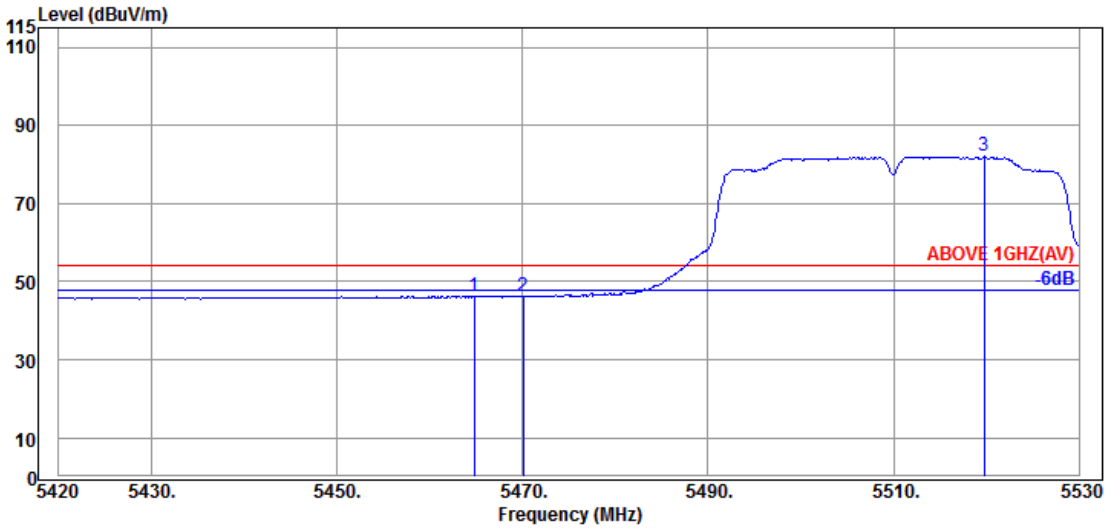


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5464.770 | 34.17 | 9.06 | 39.26 | 42.39 | 46.36 | 54.00 | 7.64 | Average |
| | 5470.050 | 34.17 | 9.06 | 39.26 | 42.26 | 46.23 | 54.00 | 7.77 | Average |
| @ | 5519.770 | 34.10 | 9.09 | 39.26 | 78.15 | 82.08 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5510MHz |

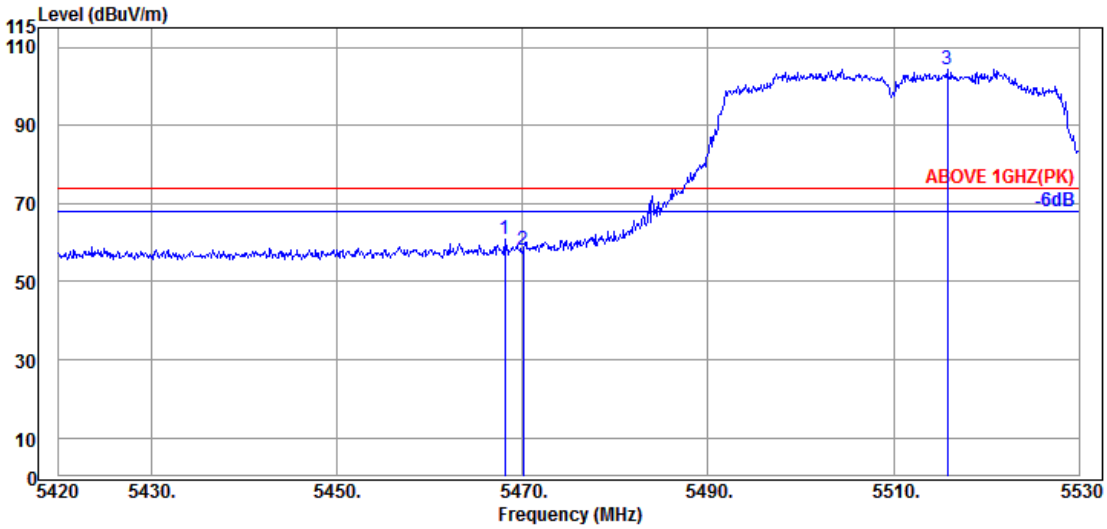


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.070 | 34.17 | 9.06 | 39.26 | 57.03 | 61.00 | 74.00 | 13.00 | Peak |
| 5470.050 | 34.17 | 9.06 | 39.26 | 54.06 | 58.03 | 74.00 | 15.97 | Peak |
| @ 5515.810 | 34.10 | 9.09 | 39.26 | 100.33 | 104.26 | --- | --- | Peak |

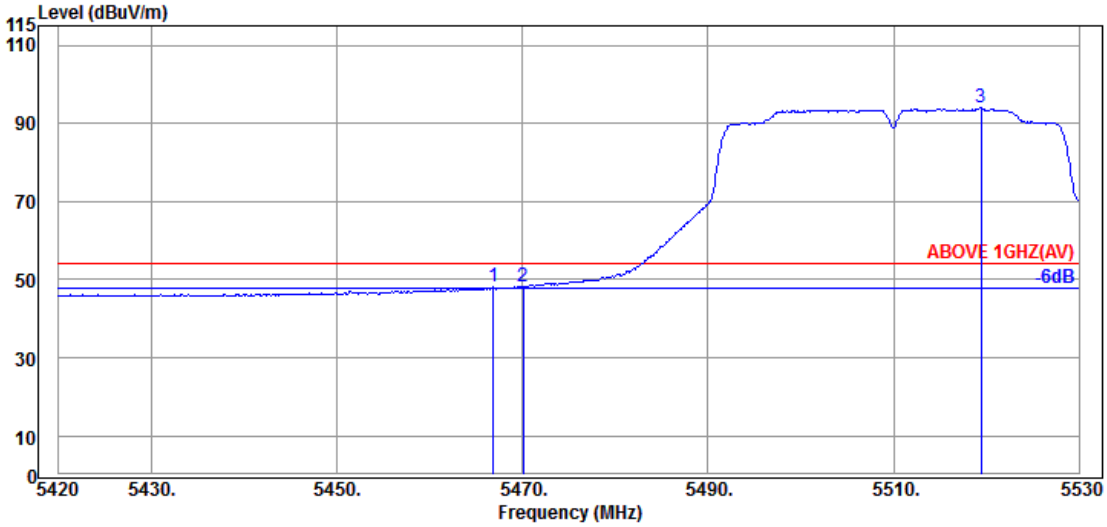


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5466.860 | 34.17 | 9.06 | 39.26 | 44.08 | 48.05 | 54.00 | 5.95 | Average |
| 5470.050 | 34.17 | 9.06 | 39.26 | 44.23 | 48.20 | 54.00 | 5.80 | Average |
| @ 5519.440 | 34.10 | 9.09 | 39.26 | 90.05 | 93.98 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5670MHz |

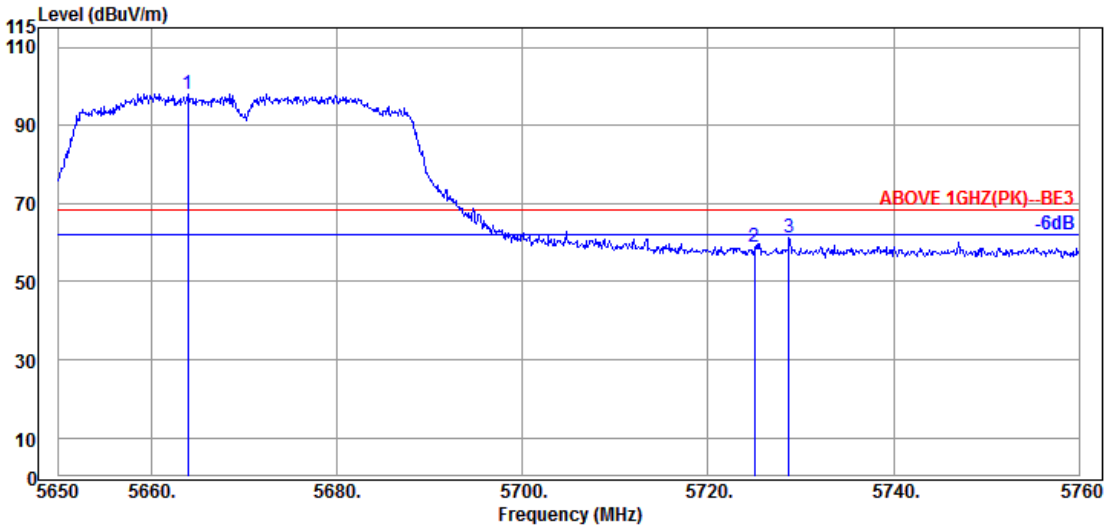


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5663.970 | 33.93 | 9.16 | 39.29 | 94.31 | 98.11 | --- | --- | Peak |
| 5725.020 | 33.80 | 9.20 | 39.30 | 55.04 | 58.74 | 68.20 | 9.46 | Peak |
| 5728.760 | 33.80 | 9.20 | 39.31 | 57.46 | 61.15 | 68.20 | 7.05 | Peak |

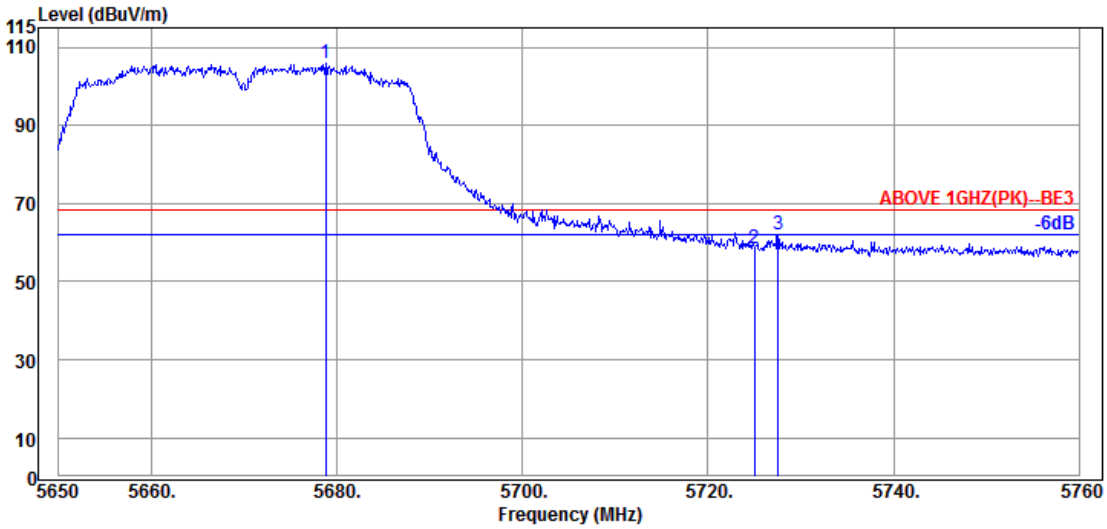


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5678.820 | 33.87 | 9.17 | 39.30 | 102.25 | 105.99 | --- | --- | Peak |
| 5725.020 | 33.80 | 9.20 | 39.30 | 54.76 | 58.46 | 68.20 | 9.74 | Peak |
| 5727.550 | 33.80 | 9.20 | 39.31 | 58.23 | 61.92 | 68.20 | 6.28 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5710MHz |

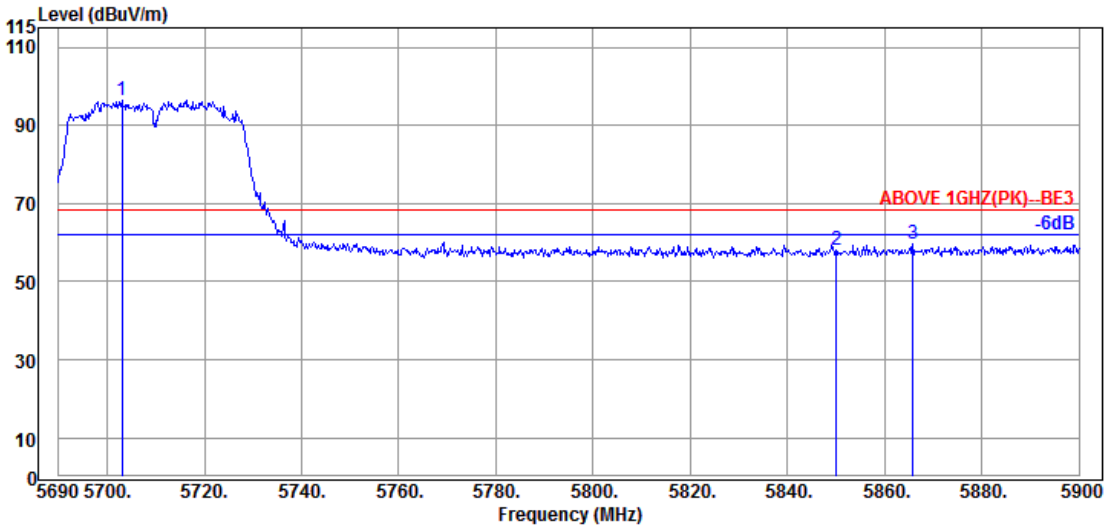


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5703.020 | 33.80 | 9.18 | 39.30 | 92.80 | 96.48 | --- | --- | Peak |
| 5850.020 | 34.10 | 9.25 | 39.33 | 53.93 | 57.95 | 68.20 | 10.25 | Peak |
| 5865.770 | 34.10 | 9.26 | 39.33 | 55.81 | 59.84 | 68.20 | 8.36 | Peak |

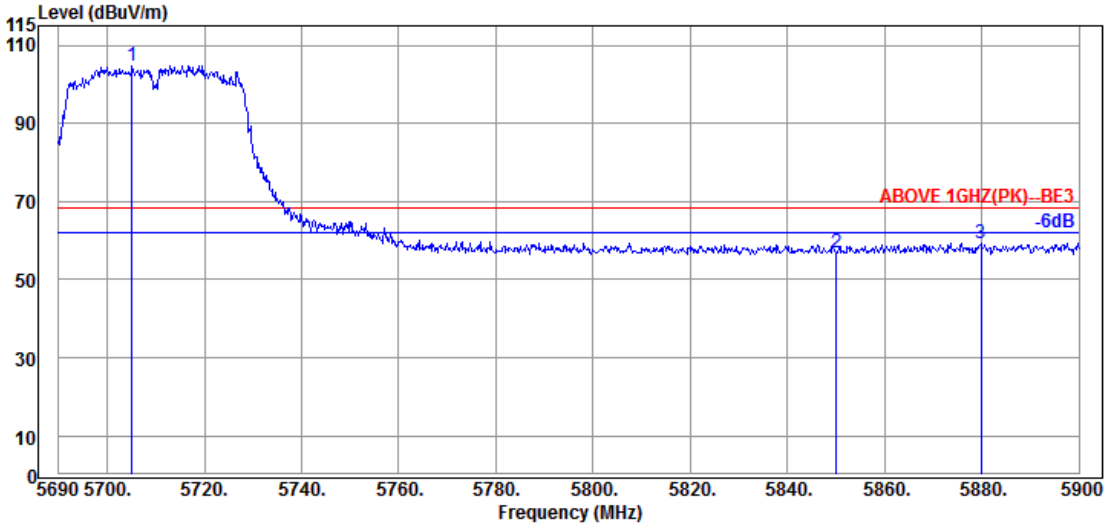


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5705.120 | 33.80 | 9.18 | 39.30 | 101.04 | 104.72 | --- | --- | Peak |
| 5850.020 | 34.10 | 9.25 | 39.33 | 52.71 | 56.73 | 68.20 | 11.47 | Peak |
| 5879.840 | 34.10 | 9.27 | 39.34 | 55.35 | 59.38 | 68.20 | 8.82 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5710MHz |

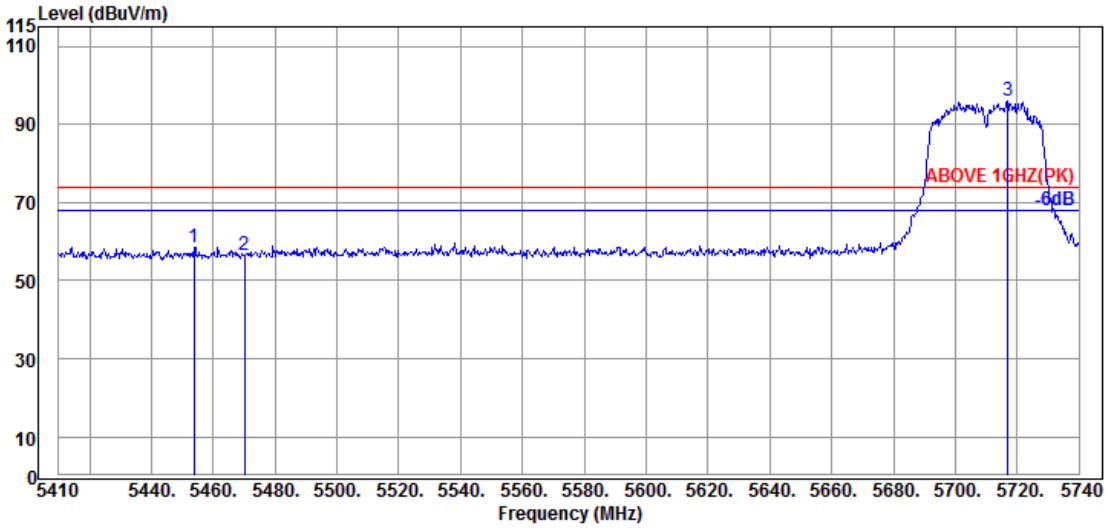


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5453.890 | 34.20 | 9.05 | 39.26 | 54.63 | 58.62 | 74.00 | 15.38 | Peak |
| 5470.060 | 34.17 | 9.06 | 39.26 | 52.37 | 56.34 | 74.00 | 17.66 | Peak |
| @ 5716.900 | 33.80 | 9.19 | 39.30 | 92.23 | 95.92 | --- | --- | Peak |

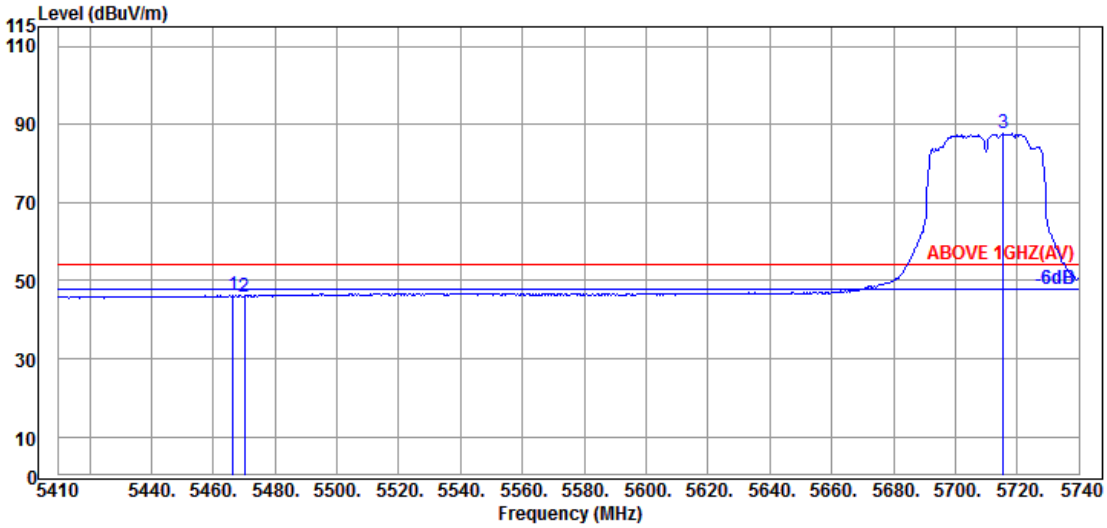


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5466.430 | 34.17 | 9.06 | 39.26 | 42.17 | 46.14 | 54.00 | 7.86 | Average |
| 5470.060 | 34.17 | 9.06 | 39.26 | 41.99 | 45.96 | 54.00 | 8.04 | Average |
| @ 5715.580 | 33.80 | 9.19 | 39.30 | 83.85 | 87.54 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5710MHz |

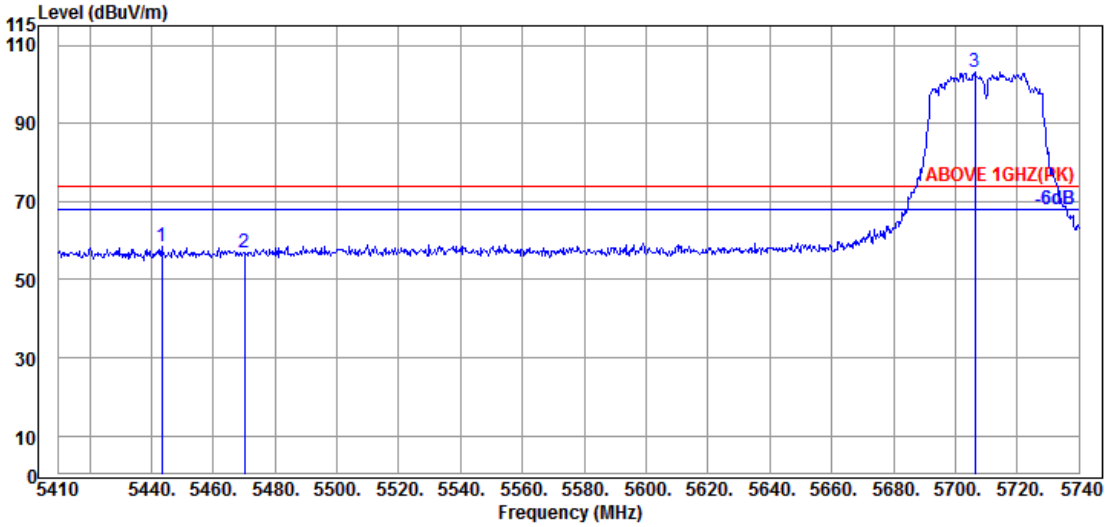


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5443.330 | 34.17 | 9.04 | 39.26 | 54.62 | 58.57 | 74.00 | 15.43 | Peak |
| 5470.060 | 34.17 | 9.06 | 39.26 | 52.97 | 56.94 | 74.00 | 17.06 | Peak |
| @ 5706.340 | 33.80 | 9.19 | 39.30 | 99.46 | 103.15 | --- | --- | Peak |

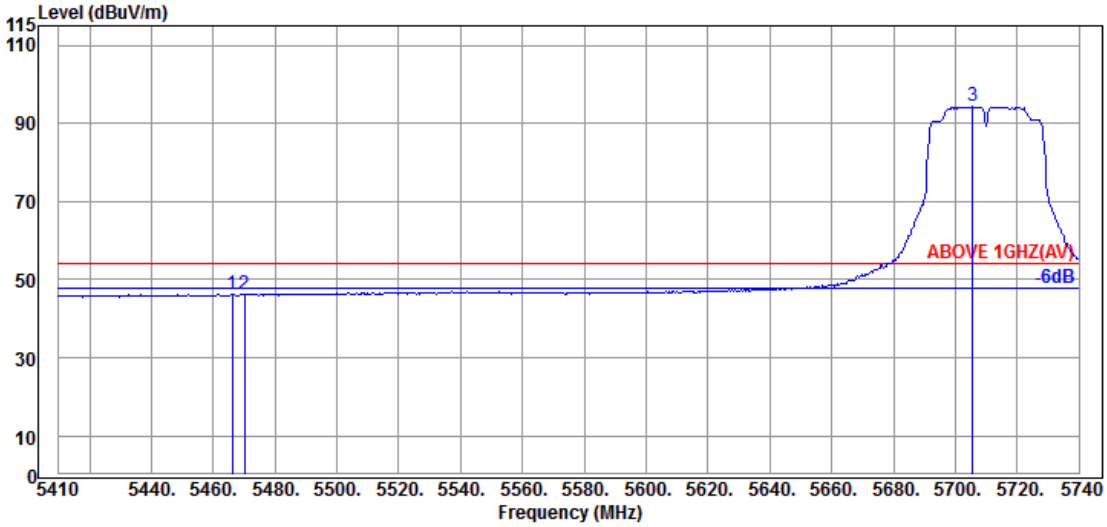


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5466.100 | 34.17 | 9.06 | 39.26 | 42.20 | 46.17 | 54.00 | 7.83 | Average |
| 5470.060 | 34.17 | 9.06 | 39.26 | 42.08 | 46.05 | 54.00 | 7.95 | Average |
| @ 5705.680 | 33.80 | 9.19 | 39.30 | 90.60 | 94.29 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

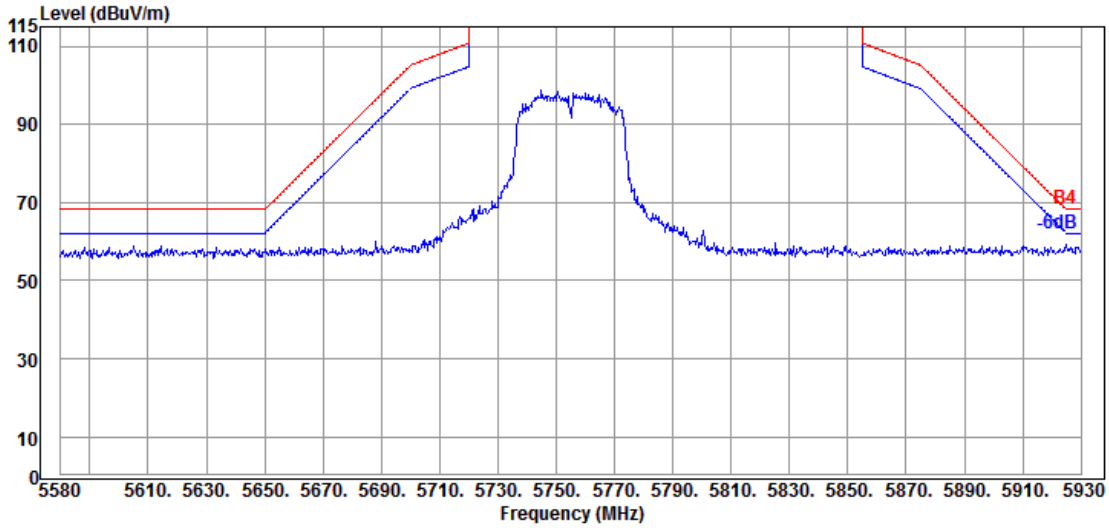


Antenna at Vertical Polarization

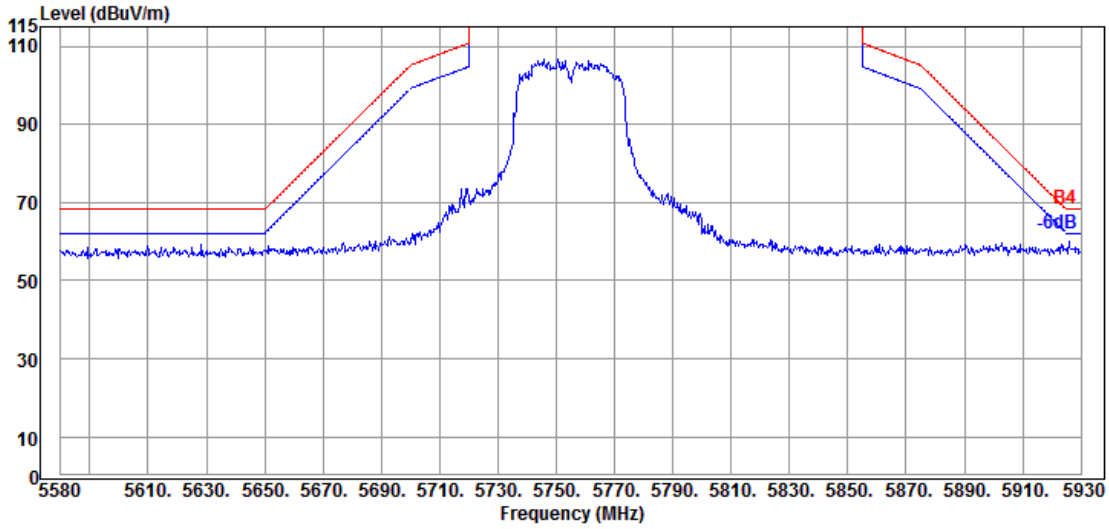




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11n-HT40 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5795MHz |

Antenna at Horizontal Polarization

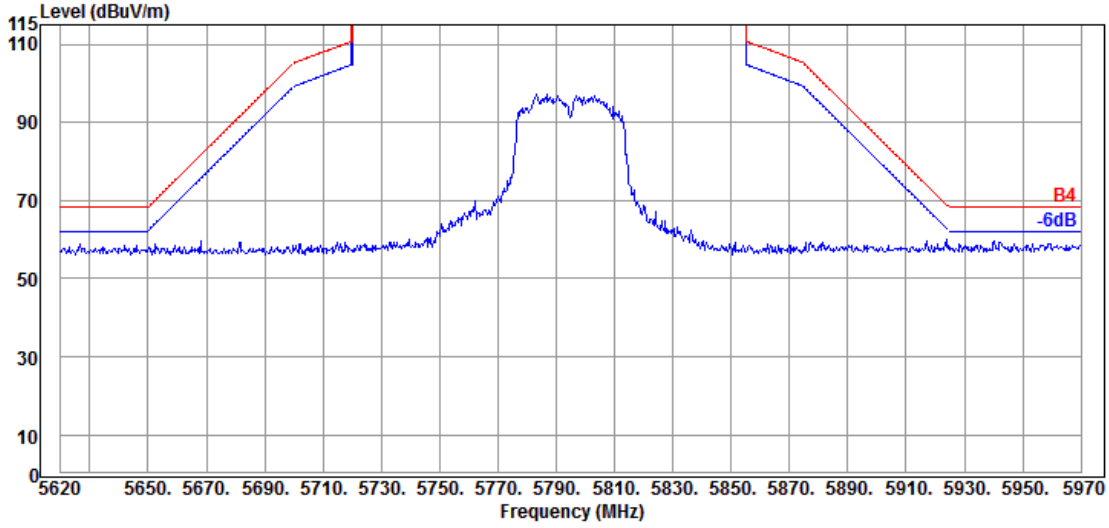


Antenna at Vertical Polarization

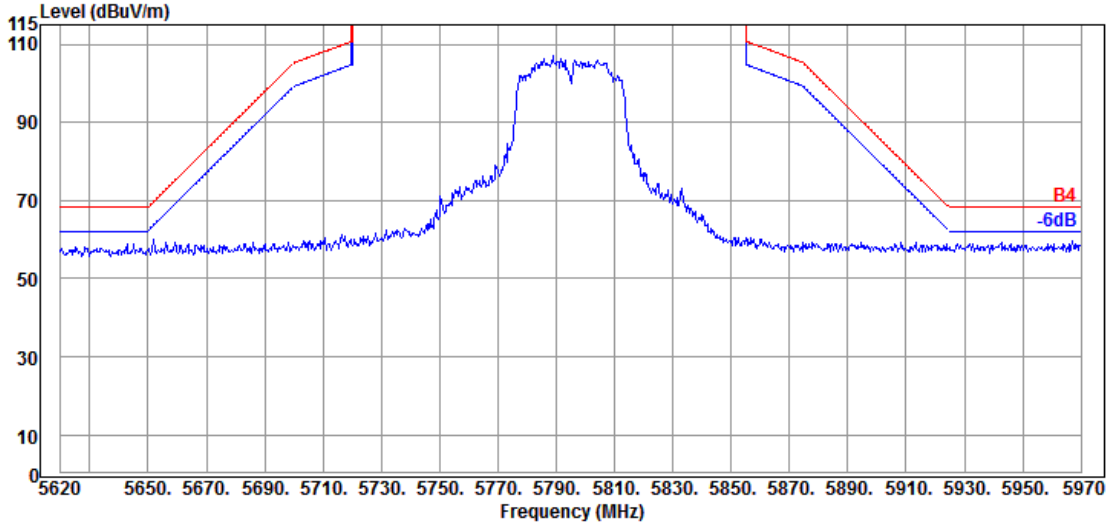




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | I |
|---|---|---|---|
| | | Frequency | TX 5210MHz |

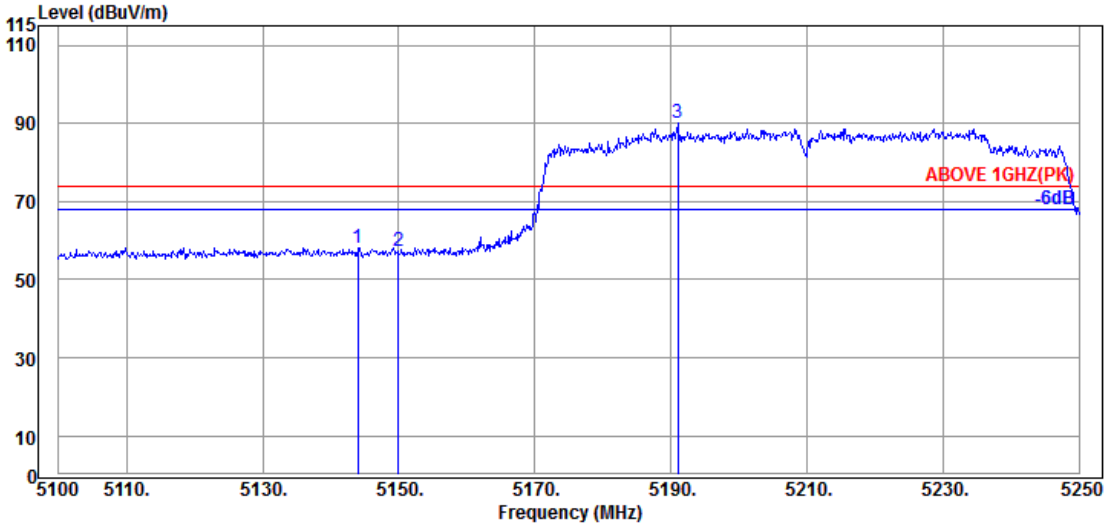


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5143.950 | 33.70 | 8.88 | 39.29 | 54.91 | 58.20 | 74.00 | 15.80 | Peak |
| 5149.950 | 33.70 | 8.88 | 39.29 | 53.94 | 57.23 | 74.00 | 16.77 | Peak |
| @ 5191.050 | 33.70 | 8.91 | 39.28 | 86.86 | 90.19 | --- | --- | Peak |

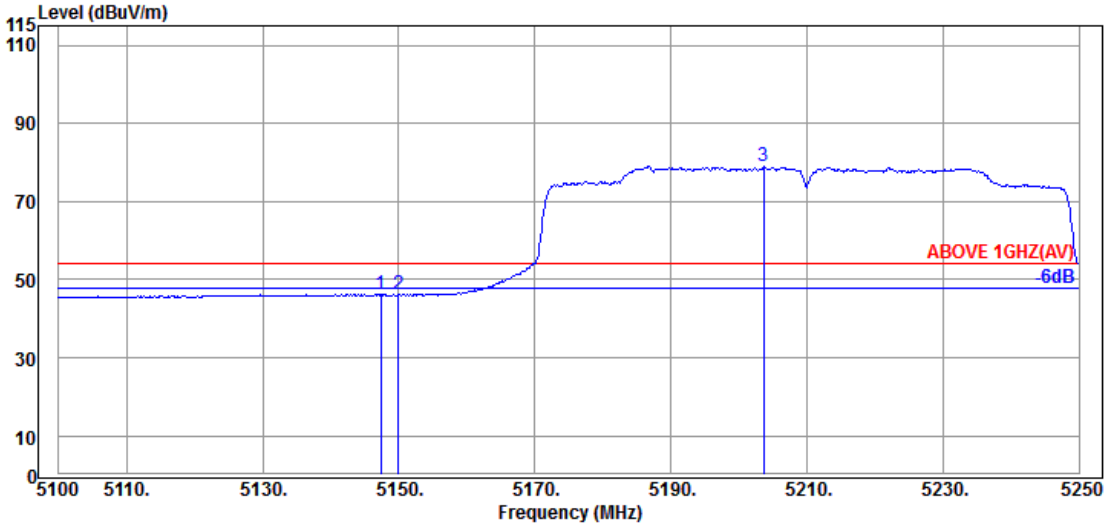


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5147.400 | 33.70 | 8.88 | 39.29 | 42.90 | 46.19 | 54.00 | 7.81 | Average |
| 5149.950 | 33.70 | 8.88 | 39.29 | 42.79 | 46.08 | 54.00 | 7.92 | Average |
| @ 5203.650 | 33.72 | 8.92 | 39.28 | 75.61 | 78.97 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | I |
|---|---|---|---|
| | | Frequency | TX 5210MHz |

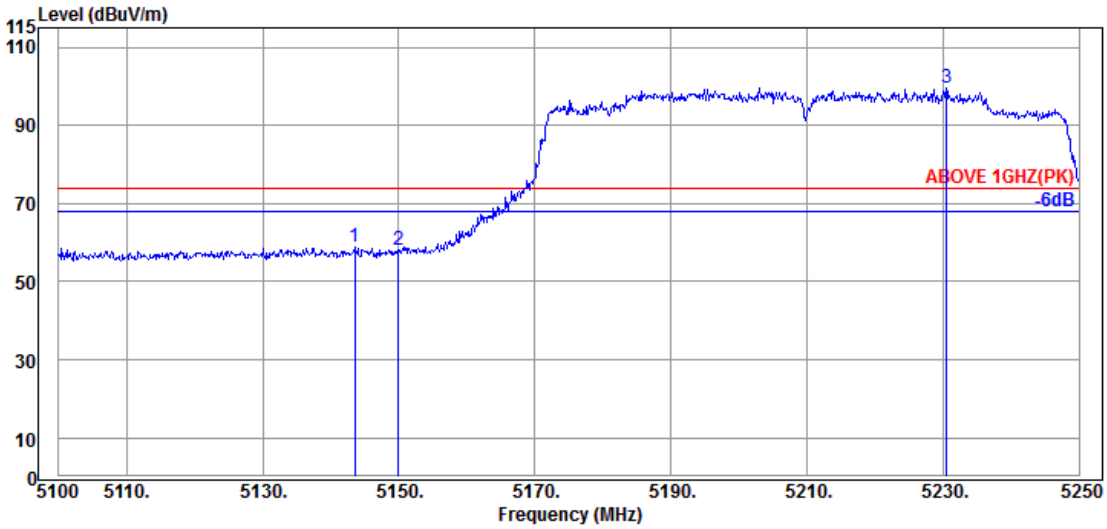


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5143.500 | 33.70 | 8.88 | 39.29 | 55.45 | 58.74 | 74.00 | 15.26 | Peak |
| 5149.950 | 33.70 | 8.88 | 39.29 | 54.93 | 58.22 | 74.00 | 15.78 | Peak |
| @ 5230.500 | 33.75 | 8.93 | 39.28 | 96.09 | 99.49 | --- | --- | Peak |

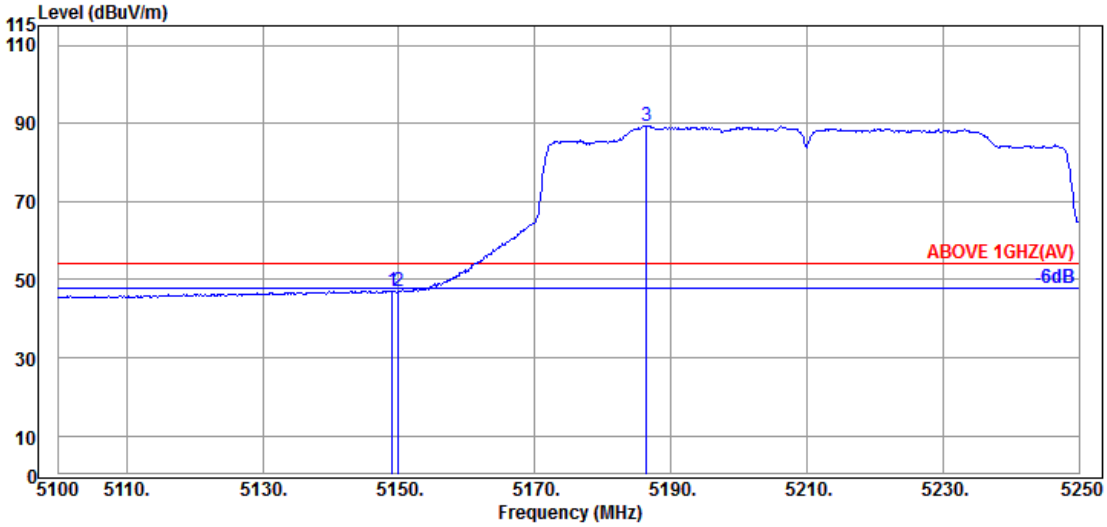


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5149.050 | 33.70 | 8.88 | 39.29 | 43.81 | 47.10 | 54.00 | 6.90 | Average |
| 5149.950 | 33.70 | 8.88 | 39.29 | 43.61 | 46.90 | 54.00 | 7.10 | Average |
| @ 5186.400 | 33.70 | 8.90 | 39.28 | 86.06 | 89.38 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5290MHz |

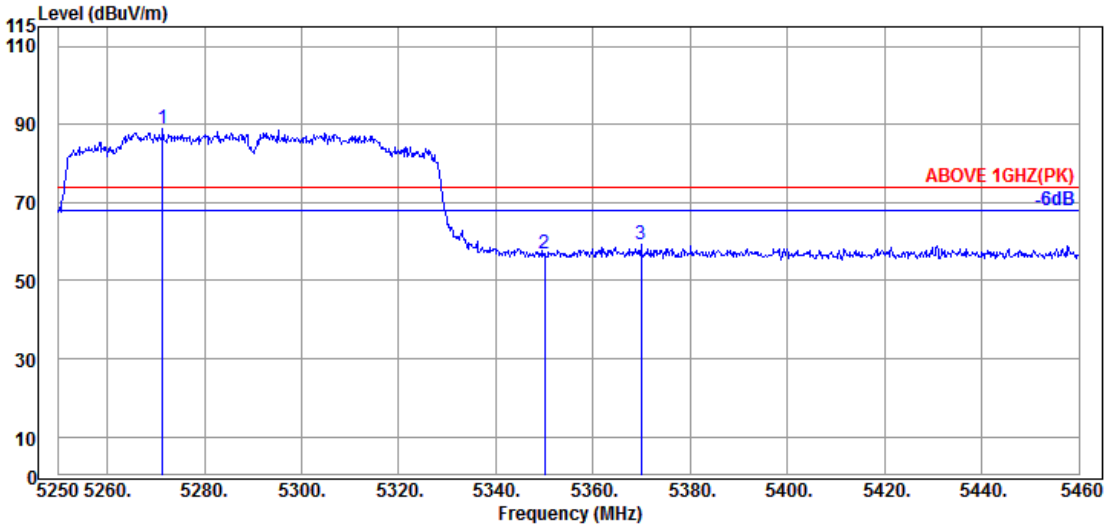


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5271.420 | 33.90 | 8.95 | 39.28 | 85.17 | 88.74 | --- | --- | Peak |
| 5349.960 | 33.90 | 8.99 | 39.27 | 53.43 | 57.05 | 74.00 | 16.95 | Peak |
| 5369.910 | 34.03 | 9.01 | 39.27 | 55.67 | 59.44 | 74.00 | 14.56 | Peak |

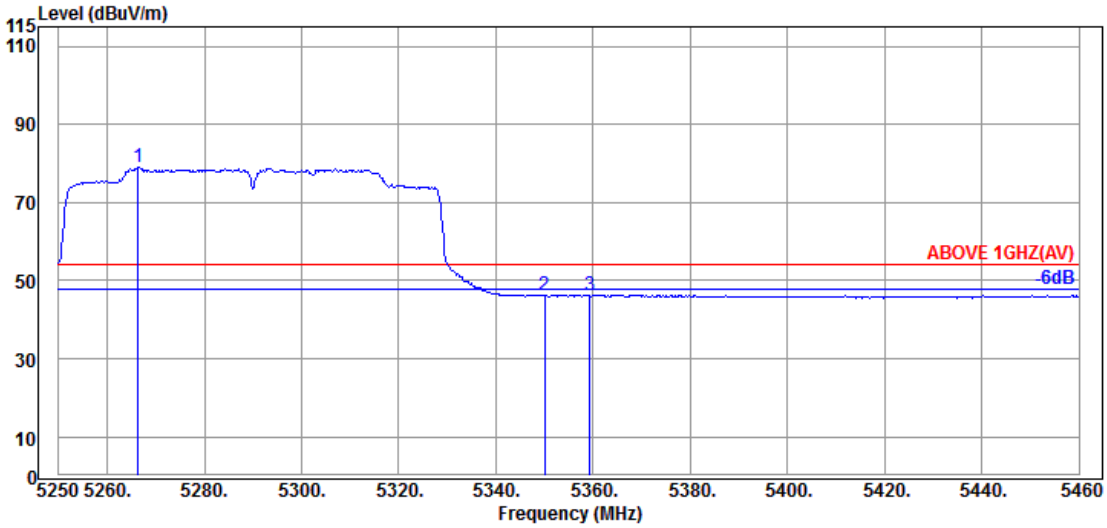


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5266.380 | 33.90 | 8.95 | 39.28 | 75.50 | 79.07 | --- | --- | Average |
| 5349.960 | 33.90 | 8.99 | 39.27 | 42.57 | 46.19 | 54.00 | 7.81 | Average |
| 5359.410 | 33.97 | 9.00 | 39.27 | 42.68 | 46.38 | 54.00 | 7.62 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5290MHz |

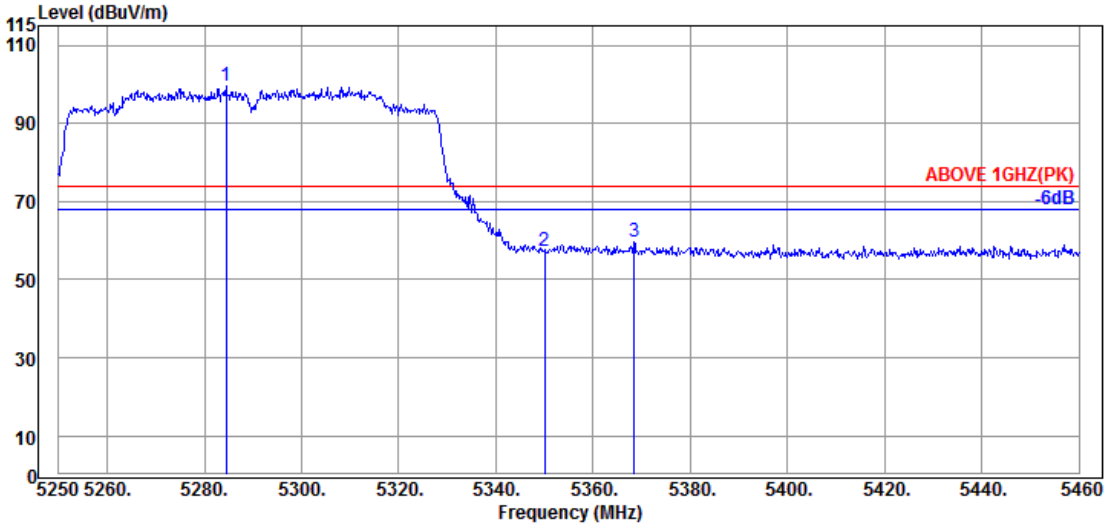


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5284.440 | 34.00 | 8.96 | 39.28 | 95.85 | 99.53 | --- | --- | Peak |
| 5349.960 | 33.90 | 8.99 | 39.27 | 53.84 | 57.46 | 74.00 | 16.54 | Peak |
| 5368.440 | 33.97 | 9.00 | 39.27 | 55.80 | 59.50 | 74.00 | 14.50 | Peak |

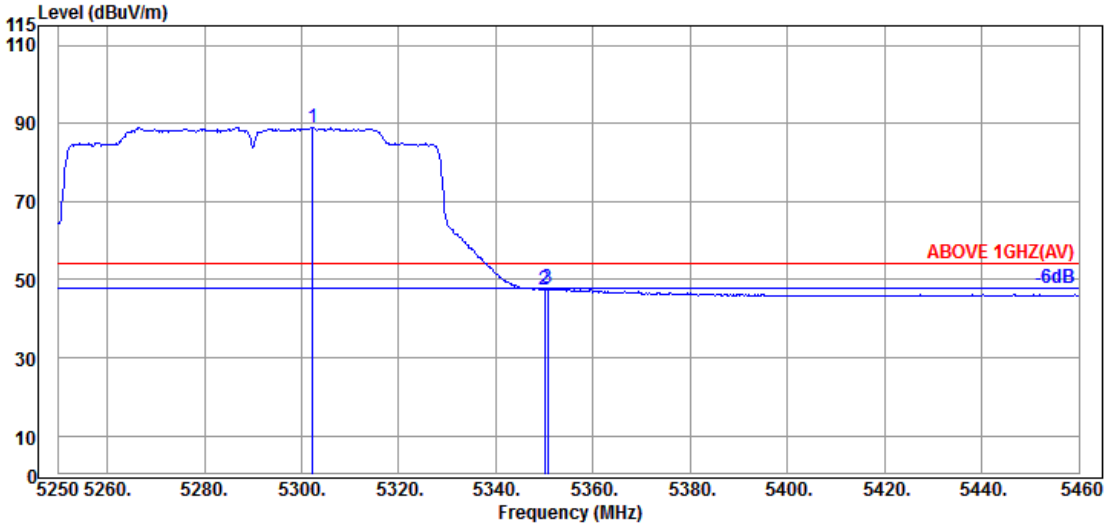


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5302.290 | 34.10 | 8.97 | 39.28 | 85.22 | 89.01 | --- | --- | Average |
| 5349.960 | 33.90 | 8.99 | 39.27 | 43.93 | 47.55 | 54.00 | 6.45 | Average |
| 5350.590 | 33.90 | 8.99 | 39.27 | 44.03 | 47.65 | 54.00 | 6.35 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5530MHz |

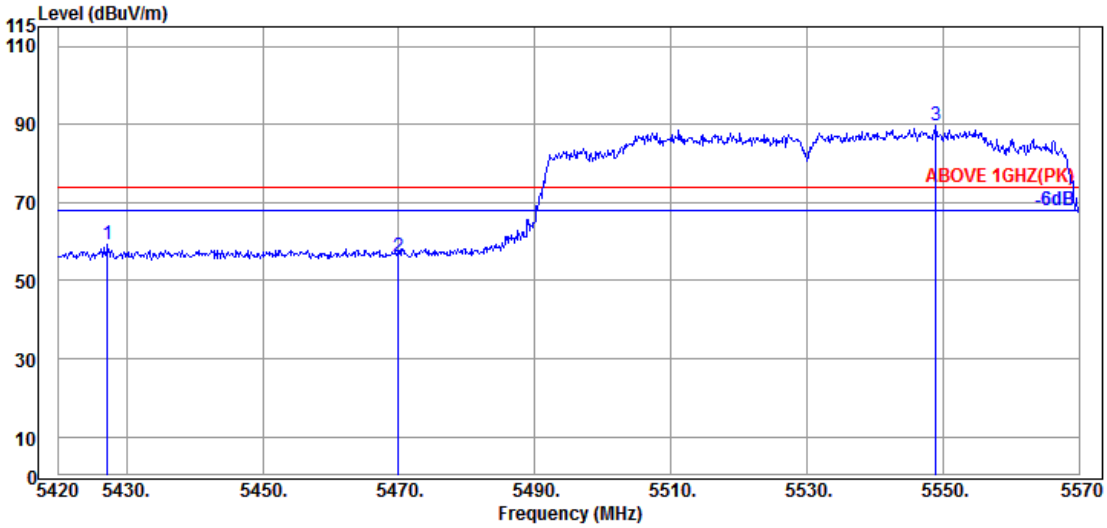


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5427.200 | 34.15 | 9.04 | 39.27 | 55.17 | 59.09 | 74.00 | 14.91 | Peak |
| | 5469.950 | 34.17 | 9.06 | 39.26 | 52.09 | 56.06 | 74.00 | 17.94 | Peak |
| @ | 5549.000 | 34.10 | 9.10 | 39.27 | 85.61 | 89.54 | --- | --- | Peak |

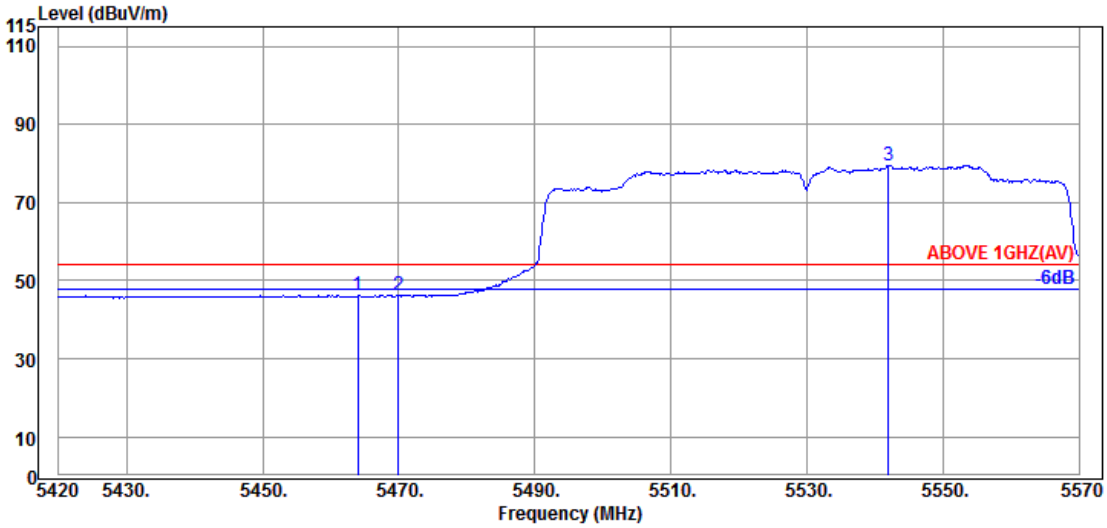


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5463.950 | 34.17 | 9.06 | 39.26 | 42.35 | 46.32 | 54.00 | 7.68 | Average |
| | 5469.950 | 34.17 | 9.06 | 39.26 | 42.19 | 46.16 | 54.00 | 7.84 | Average |
| @ | 5541.950 | 34.10 | 9.09 | 39.27 | 75.56 | 79.48 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5530MHz |

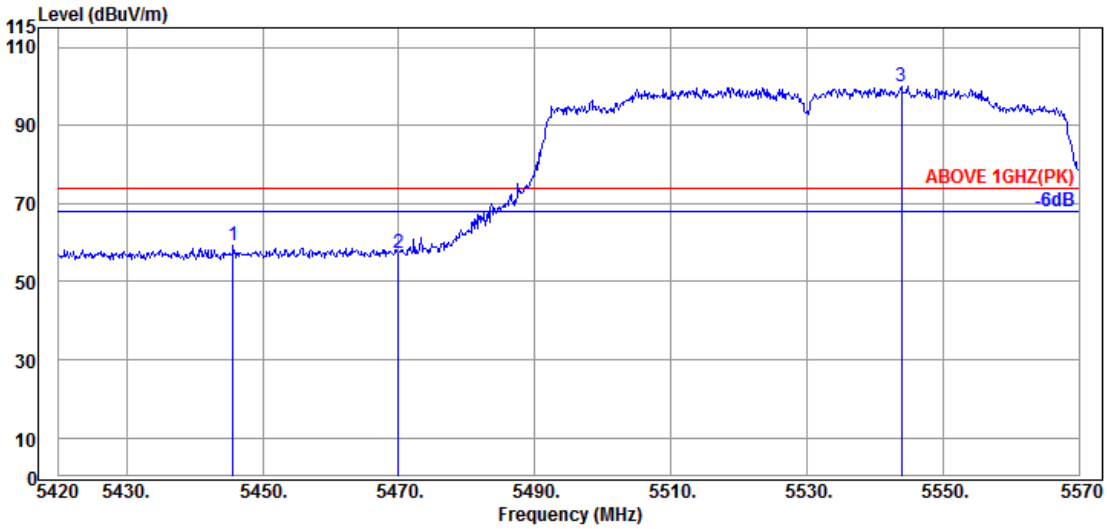


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5445.650 | 34.17 | 9.04 | 39.26 | 55.17 | 59.12 | 74.00 | 14.88 | Peak |
| 5469.950 | 34.17 | 9.06 | 39.26 | 53.22 | 57.19 | 74.00 | 16.81 | Peak |
| @ 5543.900 | 34.10 | 9.10 | 39.27 | 96.18 | 100.11 | --- | --- | Peak |

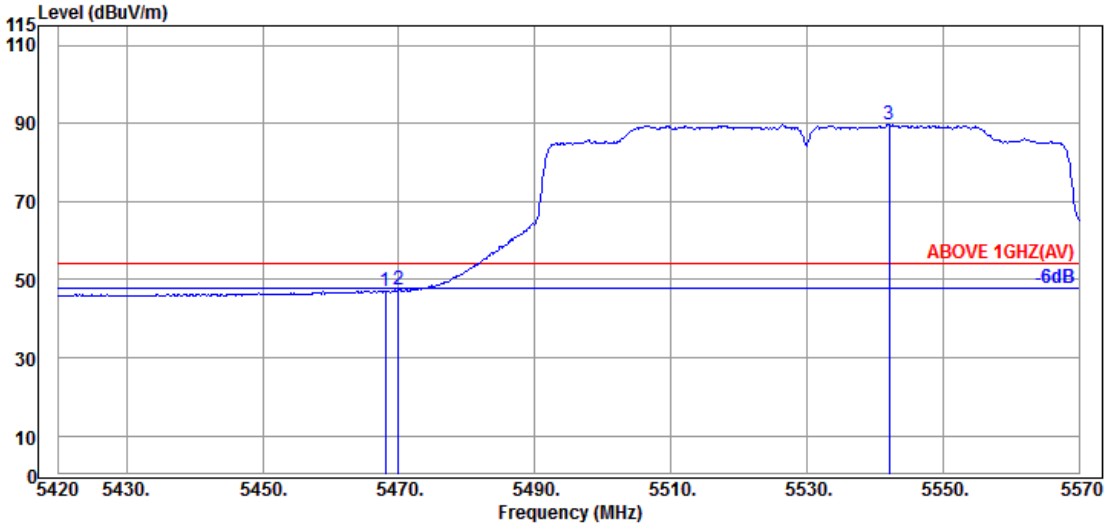


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.000 | 34.17 | 9.06 | 39.26 | 43.22 | 47.19 | 54.00 | 6.81 | Average |
| 5469.950 | 34.17 | 9.06 | 39.26 | 43.33 | 47.30 | 54.00 | 6.70 | Average |
| @ 5542.100 | 34.10 | 9.09 | 39.27 | 85.81 | 89.73 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5610MHz |

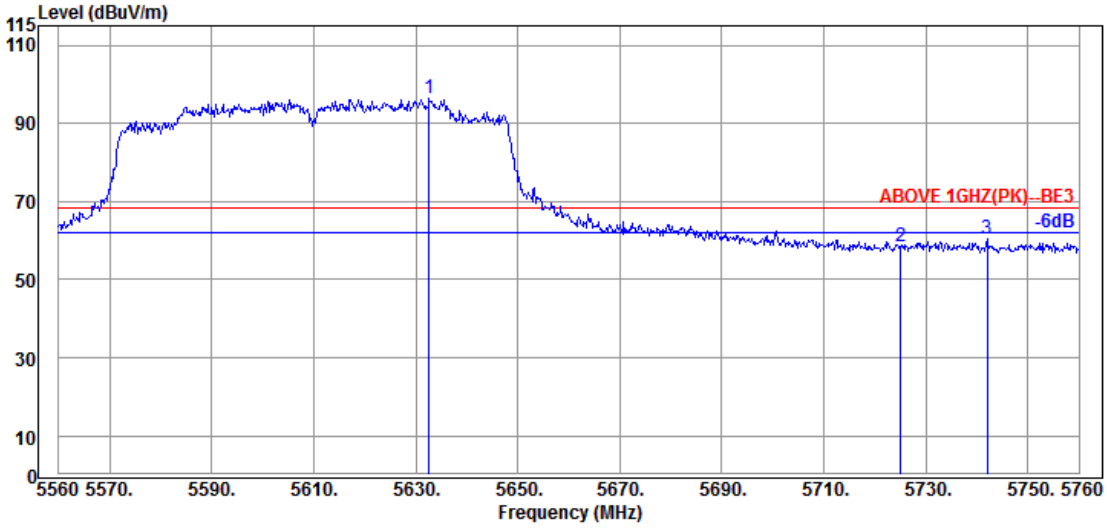


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5632.600 | 34.00 | 9.14 | 39.29 | 92.47 | 96.32 | --- | --- | Peak |
| 5725.000 | 33.80 | 9.20 | 39.30 | 54.92 | 58.62 | 68.20 | 9.58 | Peak |
| 5742.000 | 33.80 | 9.20 | 39.31 | 56.63 | 60.32 | 68.20 | 7.88 | Peak |

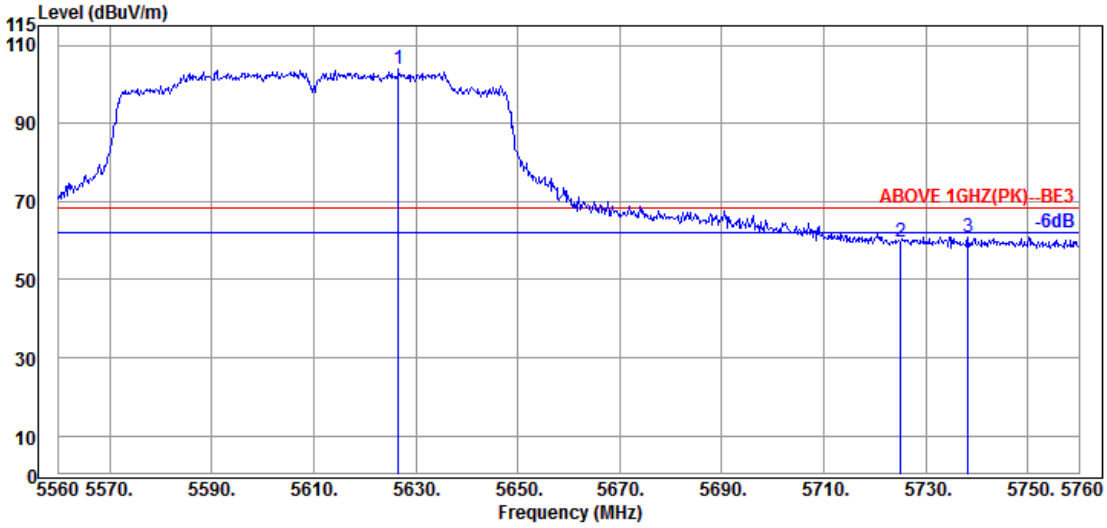


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5626.600 | 34.00 | 9.14 | 39.29 | 100.13 | 103.98 | --- | --- | Peak |
| 5725.000 | 33.80 | 9.20 | 39.30 | 55.81 | 59.51 | 68.20 | 8.69 | Peak |
| 5738.200 | 33.80 | 9.20 | 39.31 | 57.19 | 60.88 | 68.20 | 7.32 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5690MHz |

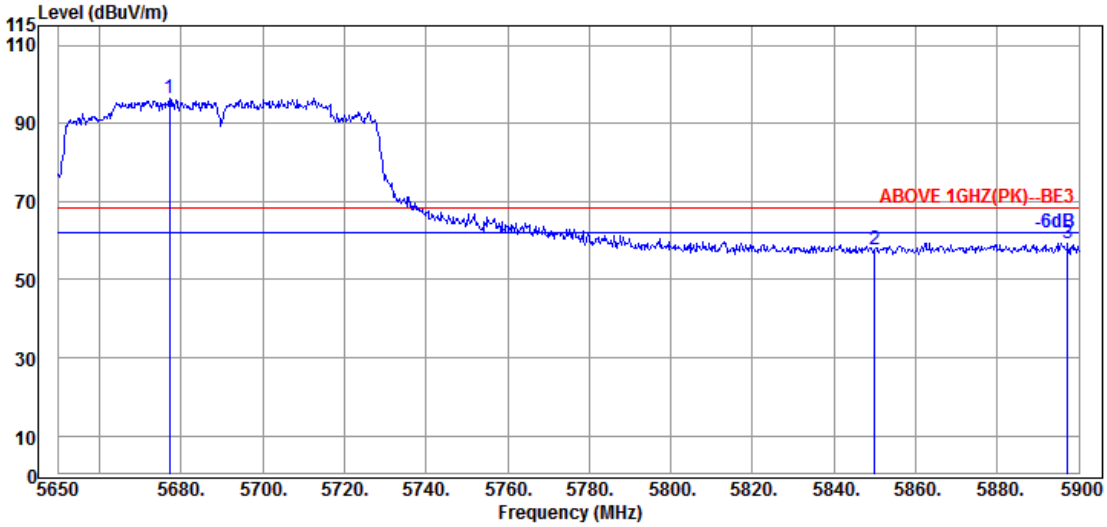


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5677.250 | 33.87 | 9.17 | 39.30 | 92.86 | 96.60 | --- | --- | Peak |
| 5850.000 | 34.10 | 9.25 | 39.33 | 53.53 | 57.55 | 68.20 | 10.65 | Peak |
| 5897.250 | 34.10 | 9.28 | 39.34 | 55.43 | 59.47 | 68.20 | 8.73 | Peak |

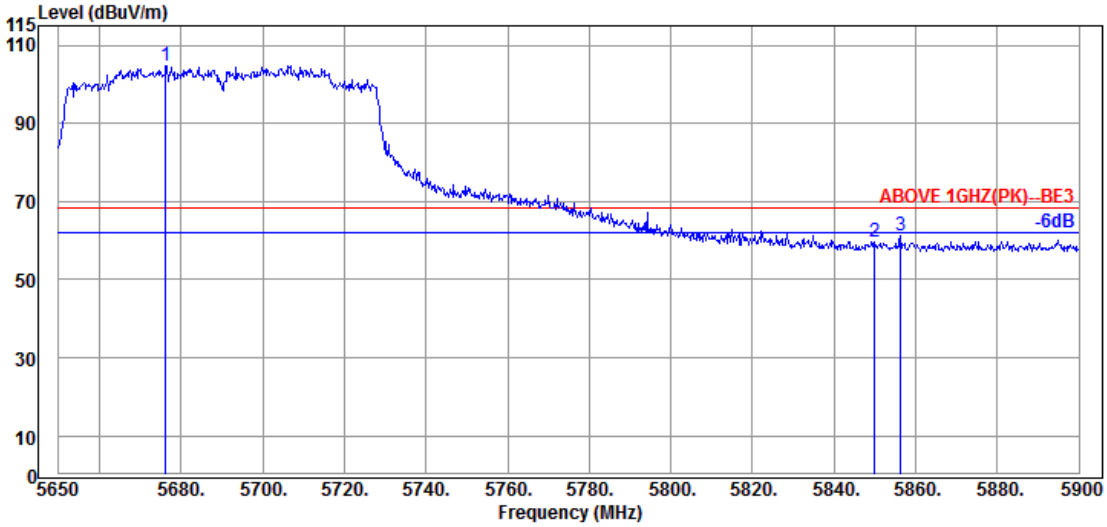


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5676.250 | 33.87 | 9.17 | 39.30 | 101.18 | 104.92 | --- | --- | Peak |
| 5850.000 | 34.10 | 9.25 | 39.33 | 55.77 | 59.79 | 68.20 | 8.41 | Peak |
| 5856.250 | 34.10 | 9.26 | 39.33 | 57.16 | 61.19 | 68.20 | 7.01 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5690MHz |

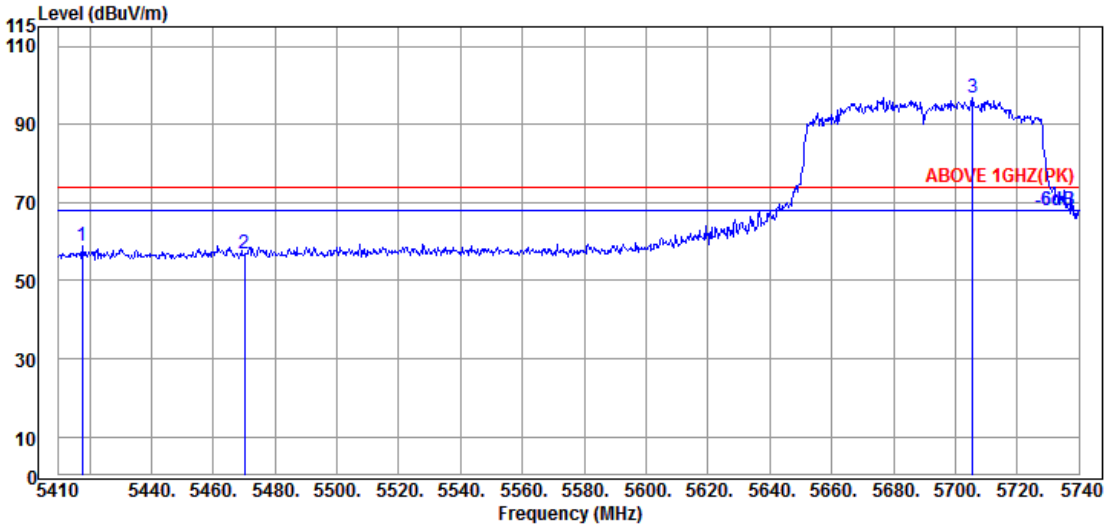


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5417.590 | 34.15 | 9.04 | 39.27 | 55.02 | 58.94 | 74.00 | 15.06 | Peak |
| | 5470.060 | 34.17 | 9.06 | 39.26 | 52.96 | 56.93 | 74.00 | 17.07 | Peak |
| @ | 5705.680 | 33.80 | 9.19 | 39.30 | 93.31 | 97.00 | --- | --- | Peak |

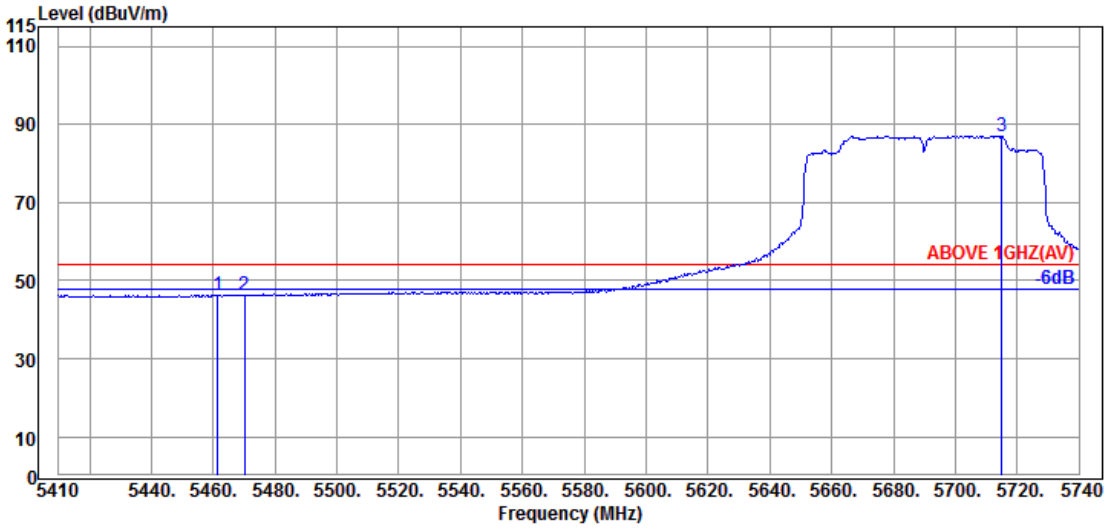


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5461.480 | 34.20 | 9.05 | 39.26 | 42.36 | 46.35 | 54.00 | 7.65 | Average |
| | 5470.060 | 34.17 | 9.06 | 39.26 | 42.18 | 46.15 | 54.00 | 7.85 | Average |
| @ | 5714.920 | 33.80 | 9.19 | 39.30 | 83.36 | 87.05 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5690MHz |

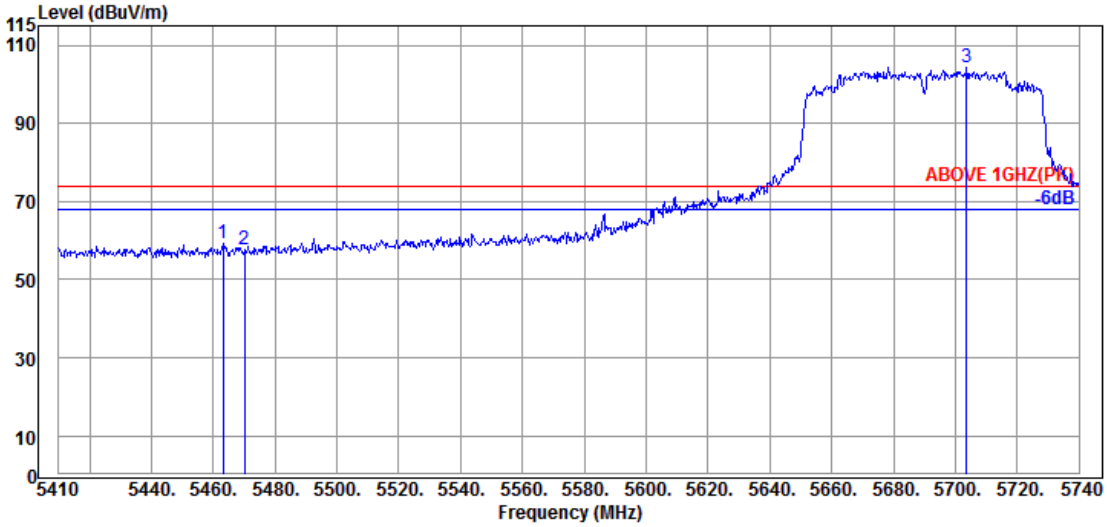


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5463.130 | 34.20 | 9.05 | 39.26 | 55.17 | 59.16 | 74.00 | 14.84 | Peak |
| 5470.060 | 34.17 | 9.06 | 39.26 | 53.92 | 57.89 | 74.00 | 16.11 | Peak |
| @ 5703.700 | 33.80 | 9.18 | 39.30 | 100.81 | 104.49 | --- | --- | Peak |

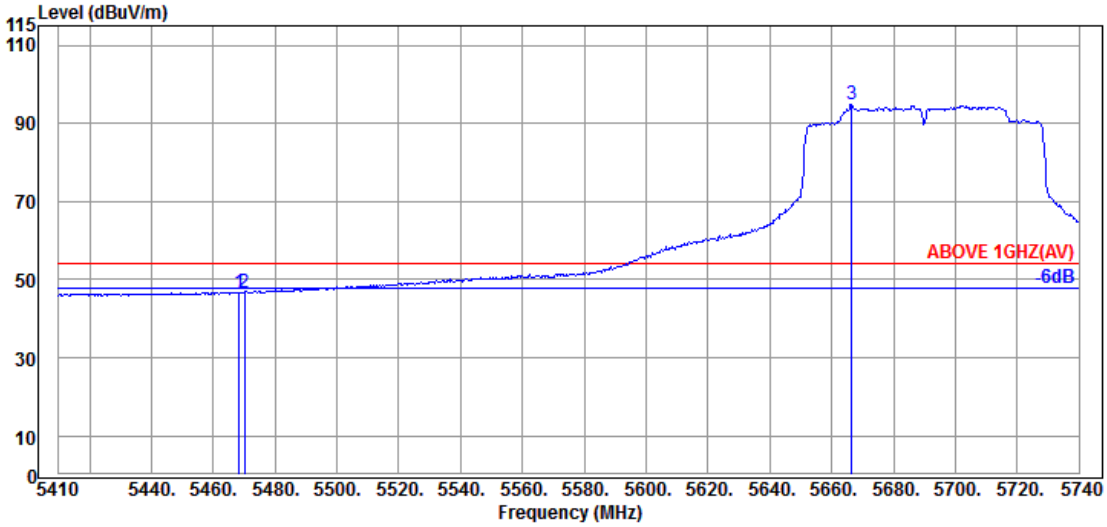


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.410 | 34.17 | 9.06 | 39.26 | 42.84 | 46.81 | 54.00 | 7.19 | Average |
| 5470.060 | 34.17 | 9.06 | 39.26 | 42.70 | 46.67 | 54.00 | 7.33 | Average |
| @ 5666.410 | 33.93 | 9.16 | 39.29 | 90.99 | 94.79 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT80 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5775MHz |

Antenna at Horizontal Polarization

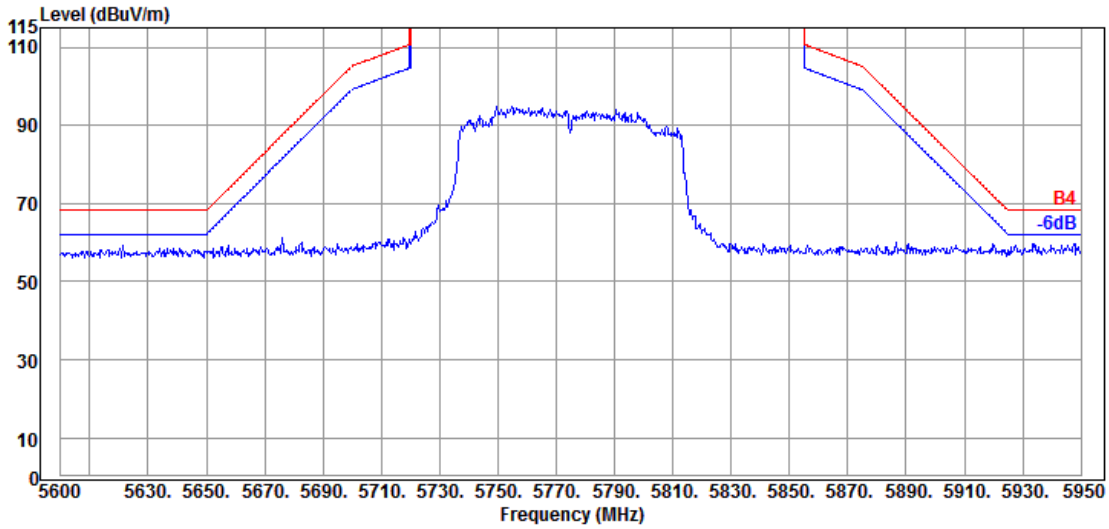


Antenna at Vertical Polarization

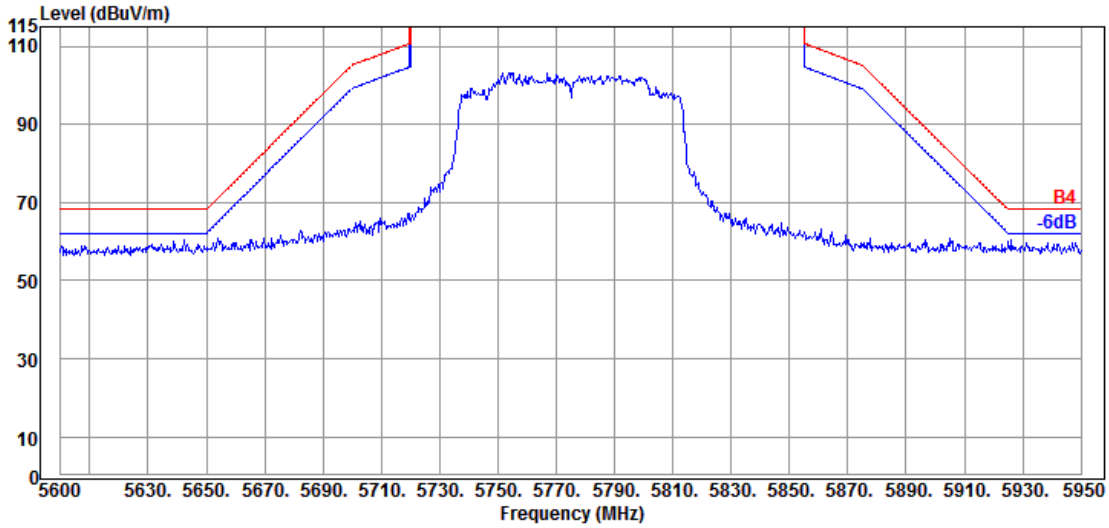




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VH160 | U-NII Band | 1 & 2A |
|---|---|---|---|
| | | Frequency | TX 5250MHz |

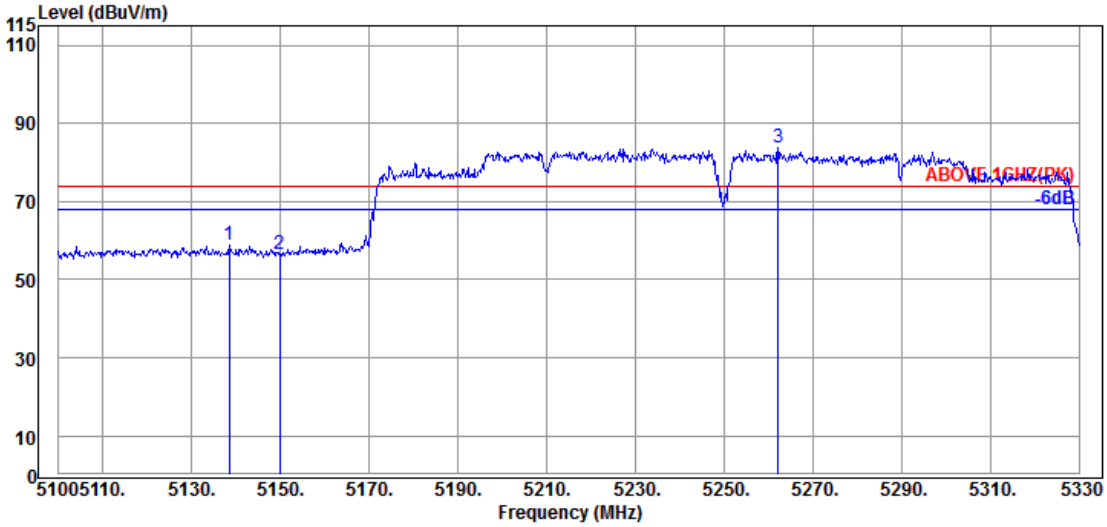


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5138.410 | 33.70 | 8.88 | 39.29 | 55.62 | 58.91 | 74.00 | 15.09 | Peak |
| | 5149.910 | 33.70 | 8.88 | 39.29 | 53.22 | 56.51 | 74.00 | 17.49 | Peak |
| @ | 5262.150 | 33.90 | 8.95 | 39.28 | 80.26 | 83.83 | --- | --- | Peak |

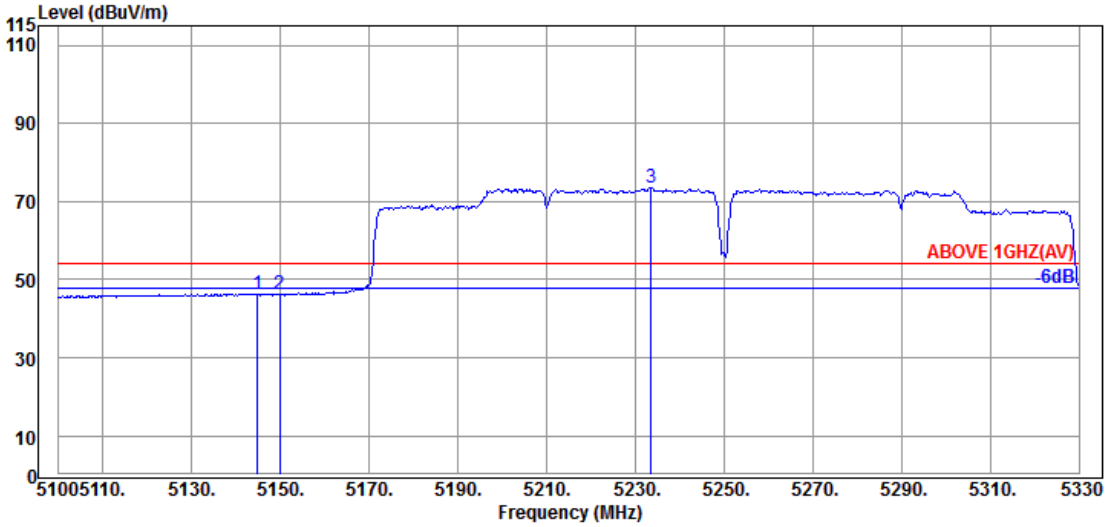


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5144.850 | 33.70 | 8.88 | 39.29 | 43.09 | 46.38 | 54.00 | 7.62 | Average |
| | 5149.910 | 33.70 | 8.88 | 39.29 | 42.82 | 46.11 | 54.00 | 7.89 | Average |
| @ | 5233.630 | 33.78 | 8.93 | 39.28 | 70.26 | 73.69 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VH160 | U-NII Band | 1 & 2A |
|---|---|---|---|
| | | Frequency | TX 5250MHz |

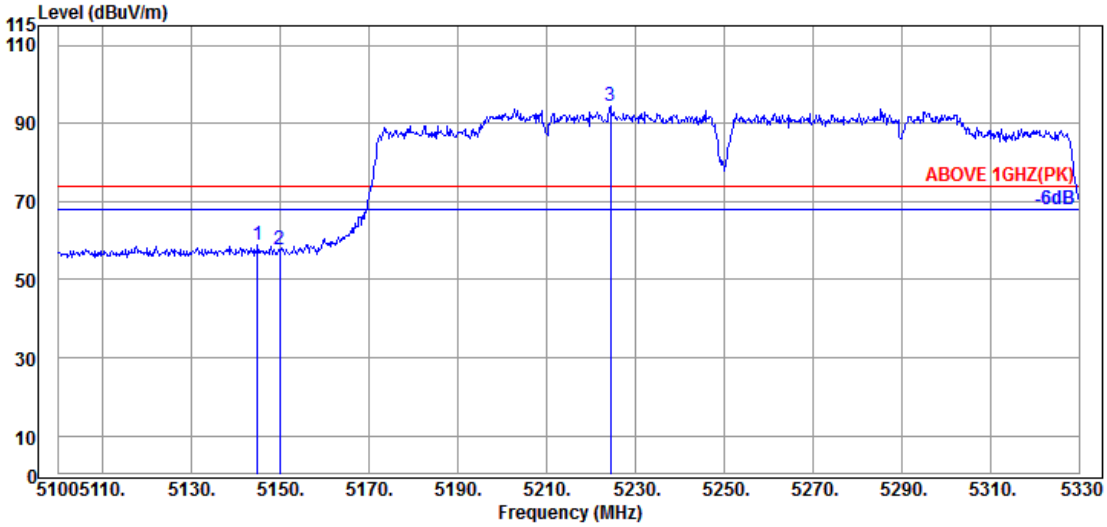


Antenna at Vertical Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5144.850 | 33.70 | 8.88 | 39.29 | 55.49 | 58.78 | 74.00 | 15.22 | Peak |
| | 5149.910 | 33.70 | 8.88 | 39.29 | 54.48 | 57.77 | 74.00 | 16.23 | Peak |
| @ | 5224.430 | 33.75 | 8.93 | 39.28 | 90.90 | 94.30 | --- | --- | Peak |

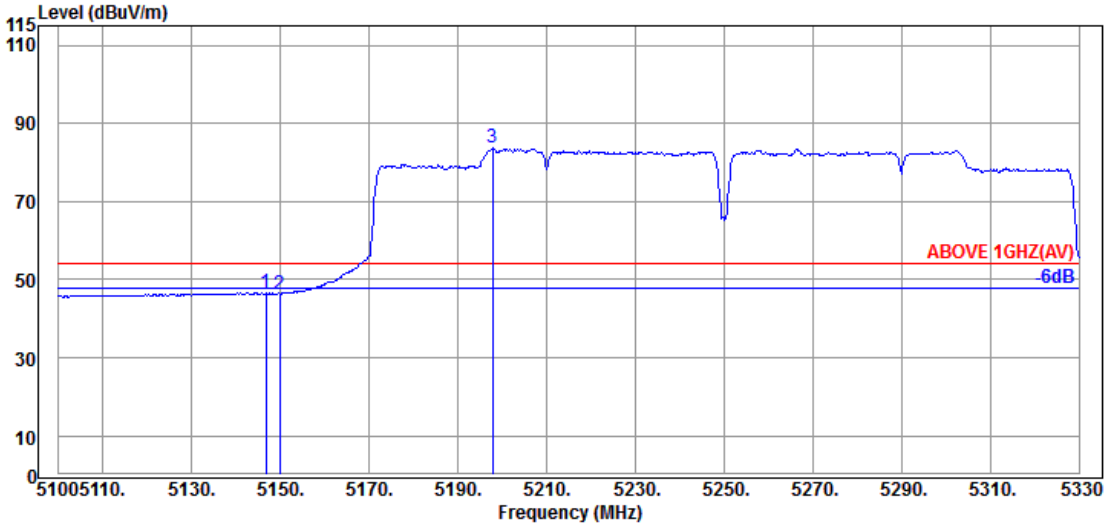


Antenna at Vertical Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5146.690 | 33.70 | 8.88 | 39.29 | 43.32 | 46.61 | 54.00 | 7.39 | Average |
| | 5149.910 | 33.70 | 8.88 | 39.29 | 43.08 | 46.37 | 54.00 | 7.63 | Average |
| @ | 5197.750 | 33.70 | 8.91 | 39.28 | 80.57 | 83.90 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VH160 | U-NII Band | 1 & 2A |
|---|---|---|---|
| | | Frequency | TX 5250MHz |

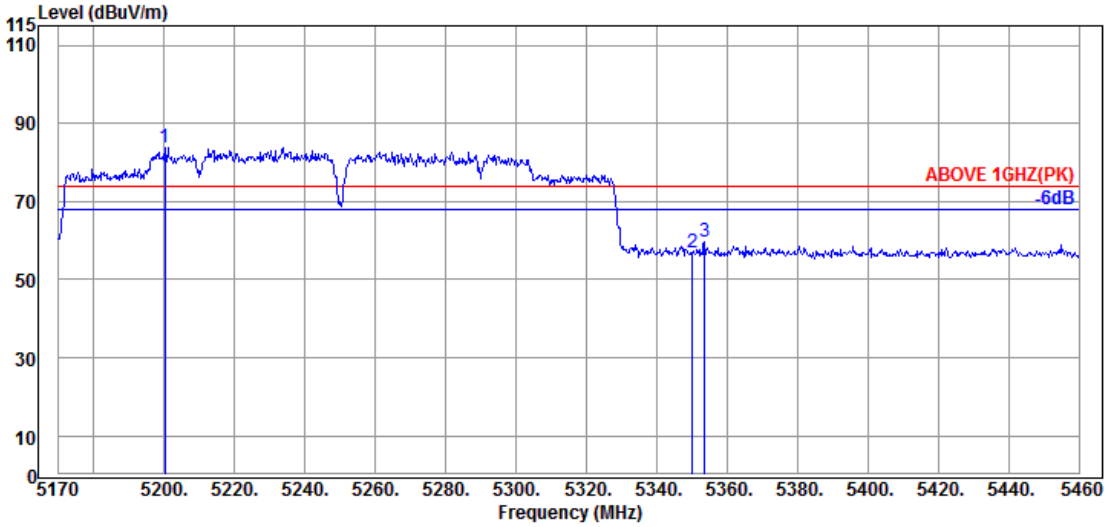


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5200.160 | 33.70 | 8.91 | 39.28 | 80.46 | 83.79 | --- | --- | Peak |
| 5350.090 | 33.90 | 8.99 | 39.27 | 53.23 | 56.85 | 74.00 | 17.15 | Peak |
| 5353.570 | 33.90 | 8.99 | 39.27 | 56.06 | 59.68 | 74.00 | 14.32 | Peak |

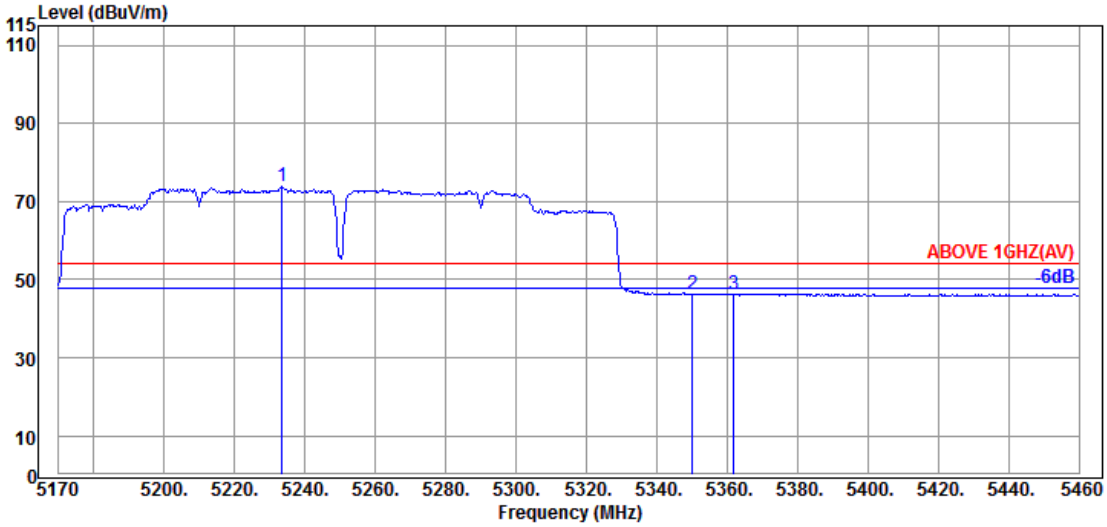


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5233.510 | 33.78 | 8.93 | 39.28 | 70.46 | 73.89 | --- | --- | Average |
| 5350.090 | 33.90 | 8.99 | 39.27 | 42.70 | 46.32 | 54.00 | 7.68 | Average |
| 5361.980 | 33.97 | 9.00 | 39.27 | 42.73 | 46.43 | 54.00 | 7.57 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VH160 | U-NII Band | 1 & 2A |
|---|---|---|---|
| | | Frequency | TX 5250MHz |

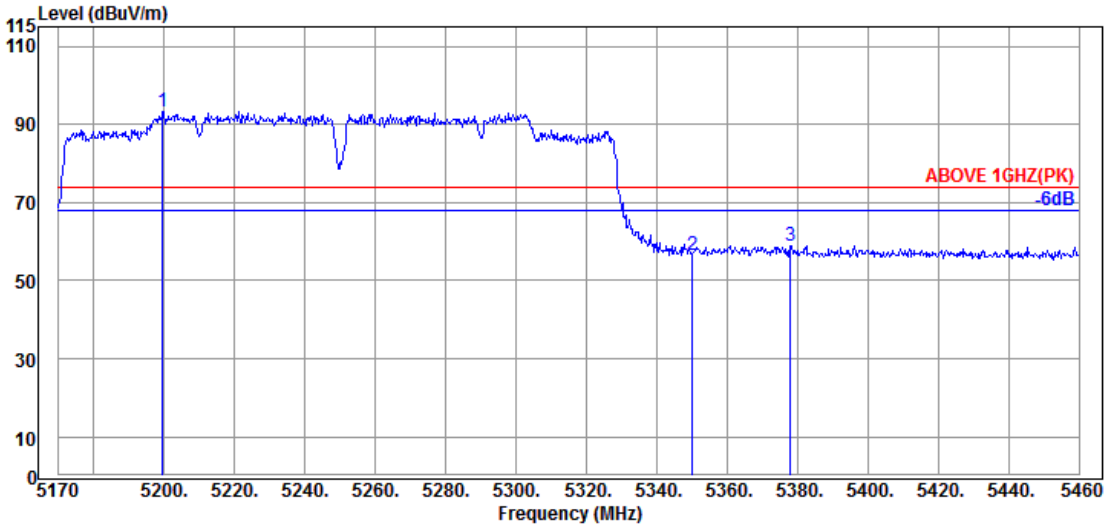


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5199.580 | 33.70 | 8.91 | 39.28 | 90.11 | 93.44 | --- | --- | Peak |
| 5350.090 | 33.90 | 8.99 | 39.27 | 52.91 | 56.53 | 74.00 | 17.47 | Peak |
| 5377.930 | 34.03 | 9.01 | 39.27 | 55.31 | 59.08 | 74.00 | 14.92 | Peak |

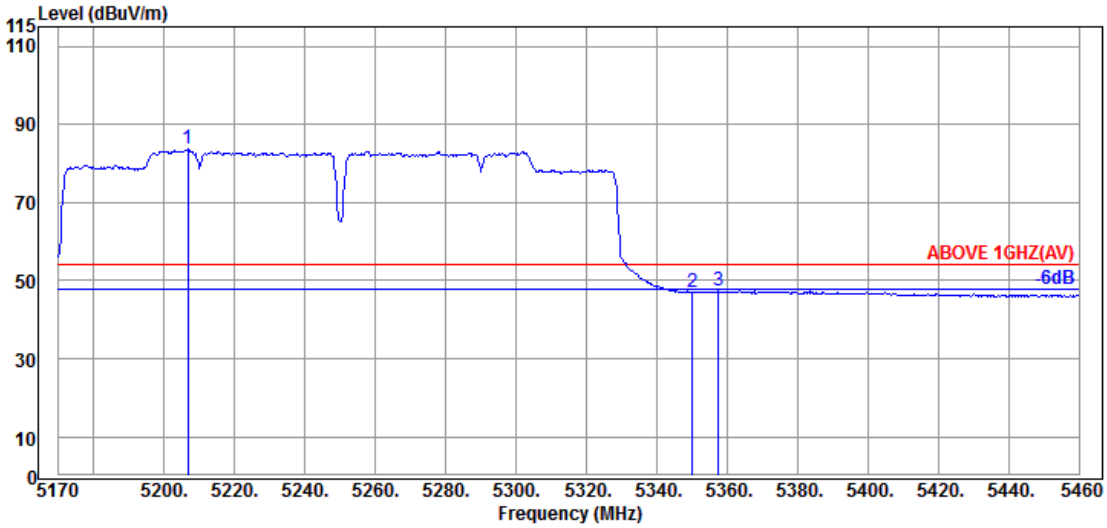


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5206.830 | 33.72 | 8.92 | 39.28 | 80.29 | 83.65 | --- | --- | Average |
| 5350.090 | 33.90 | 8.99 | 39.27 | 43.48 | 47.10 | 54.00 | 6.90 | Average |
| 5357.630 | 33.97 | 9.00 | 39.27 | 43.61 | 47.31 | 54.00 | 6.69 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT160 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5570MHz |

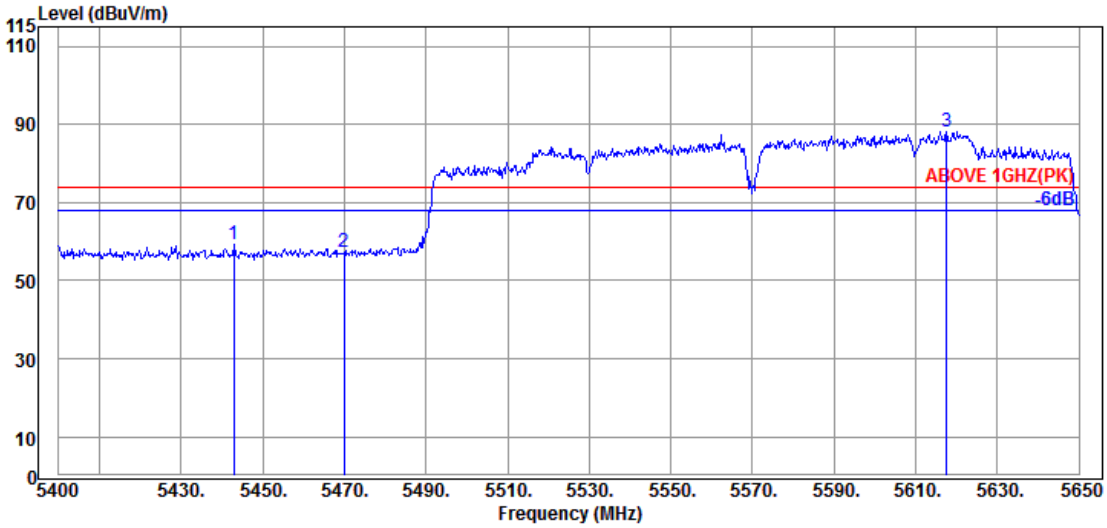


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5443.000 | 34.17 | 9.04 | 39.26 | 55.26 | 59.21 | 74.00 | 14.79 | Peak |
| | 5470.000 | 34.17 | 9.06 | 39.26 | 53.17 | 57.14 | 74.00 | 16.86 | Peak |
| @ | 5617.500 | 34.00 | 9.14 | 39.29 | 84.32 | 88.17 | --- | --- | Peak |

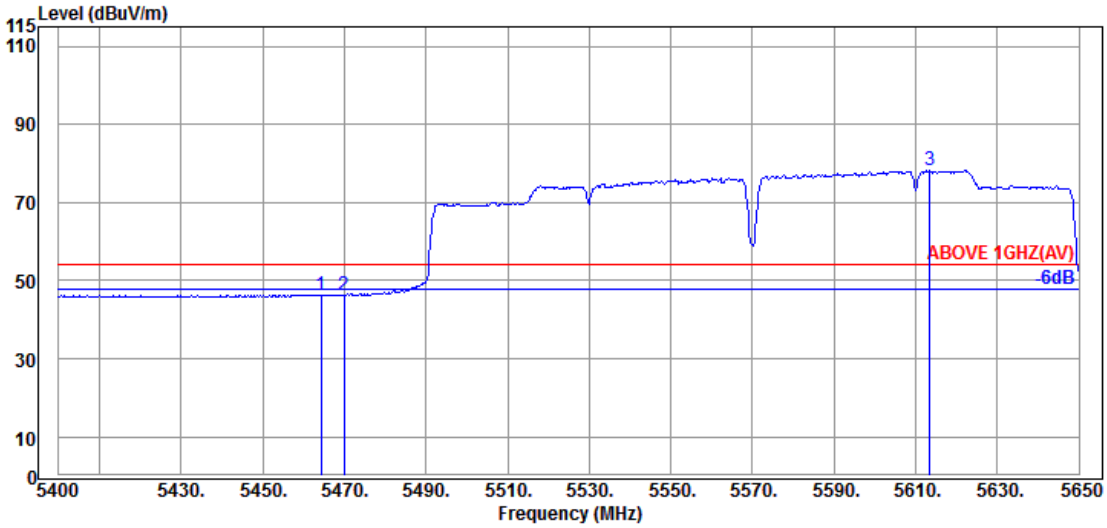


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5464.250 | 34.17 | 9.06 | 39.26 | 42.44 | 46.41 | 54.00 | 7.59 | Average |
| | 5470.000 | 34.17 | 9.06 | 39.26 | 42.34 | 46.31 | 54.00 | 7.69 | Average |
| @ | 5613.500 | 34.00 | 9.14 | 39.28 | 74.37 | 78.23 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VHT160 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5570MHz |

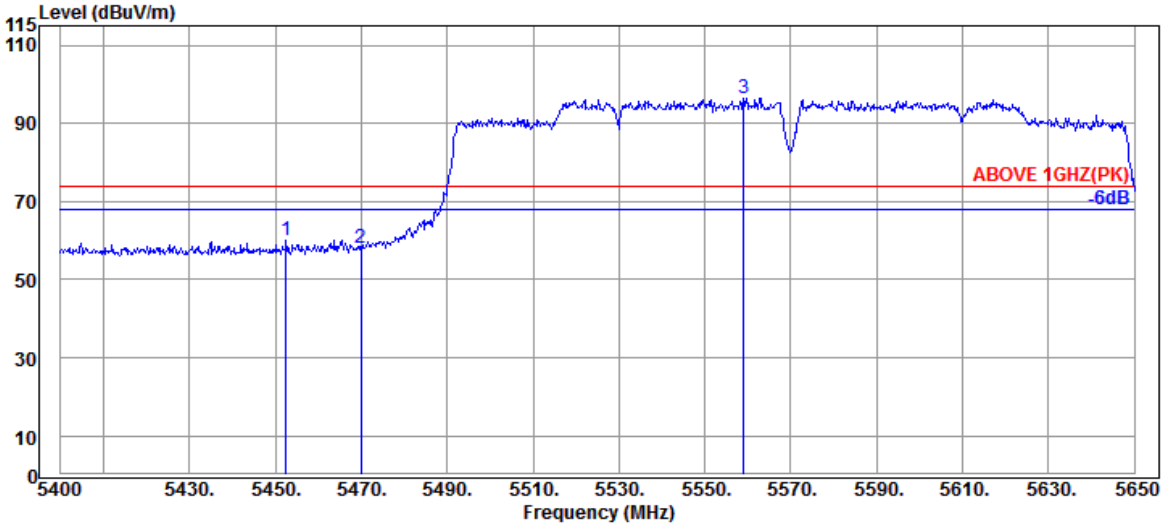


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5452.500 | 34.20 | 9.05 | 39.26 | 56.04 | 60.03 | 74.00 | 13.97 | Peak |
| 5470.000 | 34.17 | 9.06 | 39.26 | 54.26 | 58.23 | 74.00 | 15.77 | Peak |
| @ 5559.000 | 34.10 | 9.10 | 39.27 | 92.62 | 96.55 | --- | --- | Peak |

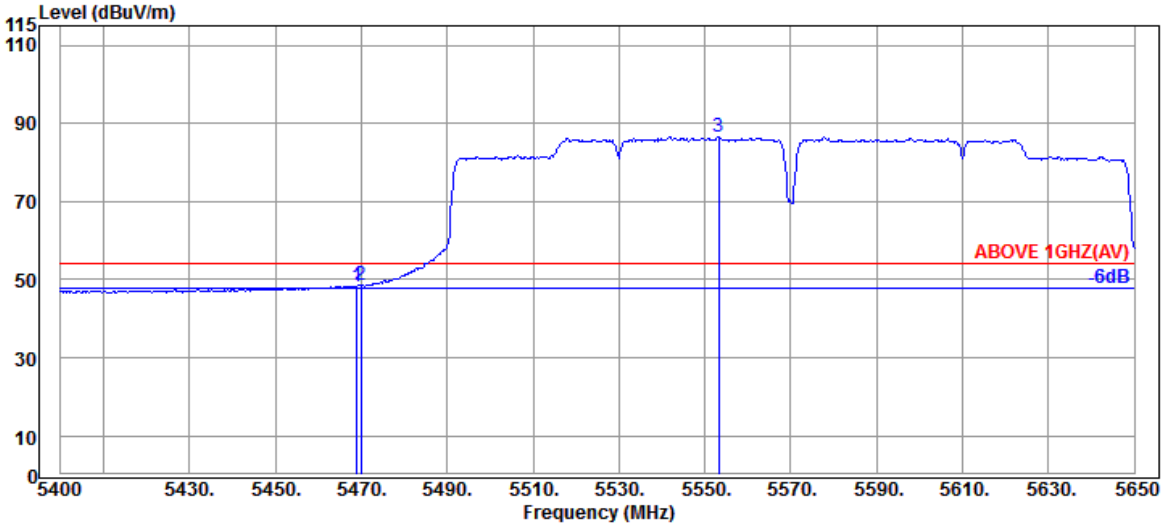


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5469.000 | 34.17 | 9.06 | 39.26 | 44.39 | 48.36 | 54.00 | 5.64 | Average |
| 5470.000 | 34.17 | 9.06 | 39.26 | 44.74 | 48.71 | 54.00 | 5.29 | Average |
| @ 5553.250 | 34.10 | 9.10 | 39.27 | 82.55 | 86.48 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-VH160 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5570MHz |

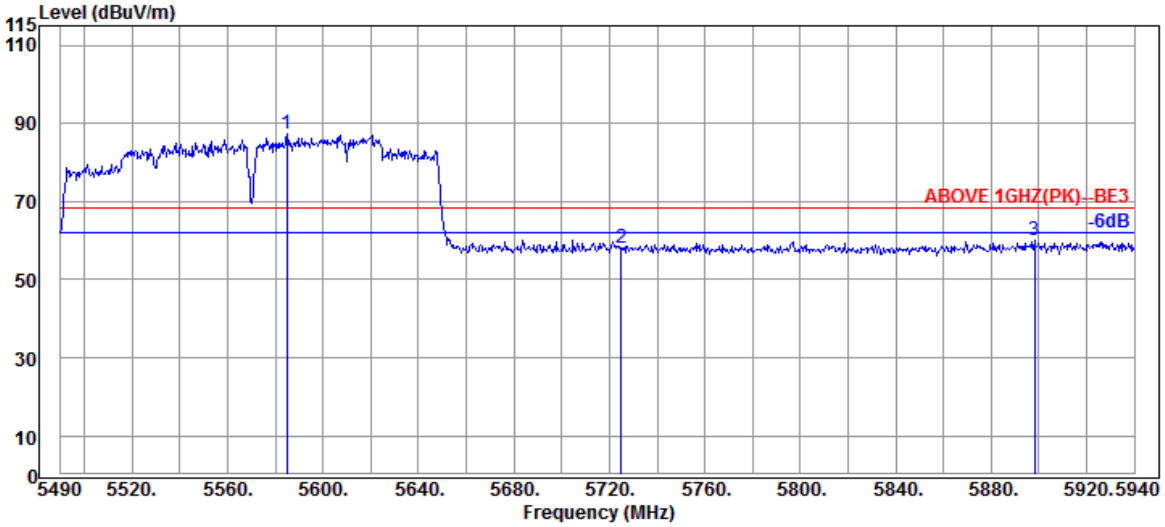


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5584.950 | 34.03 | 9.12 | 39.28 | 83.36 | 87.23 | --- | --- | Peak |
| 5724.900 | 33.80 | 9.20 | 39.30 | 54.47 | 58.17 | 68.20 | 10.03 | Peak |
| 5898.150 | 34.10 | 9.28 | 39.34 | 55.92 | 59.96 | 68.20 | 8.24 | Peak |

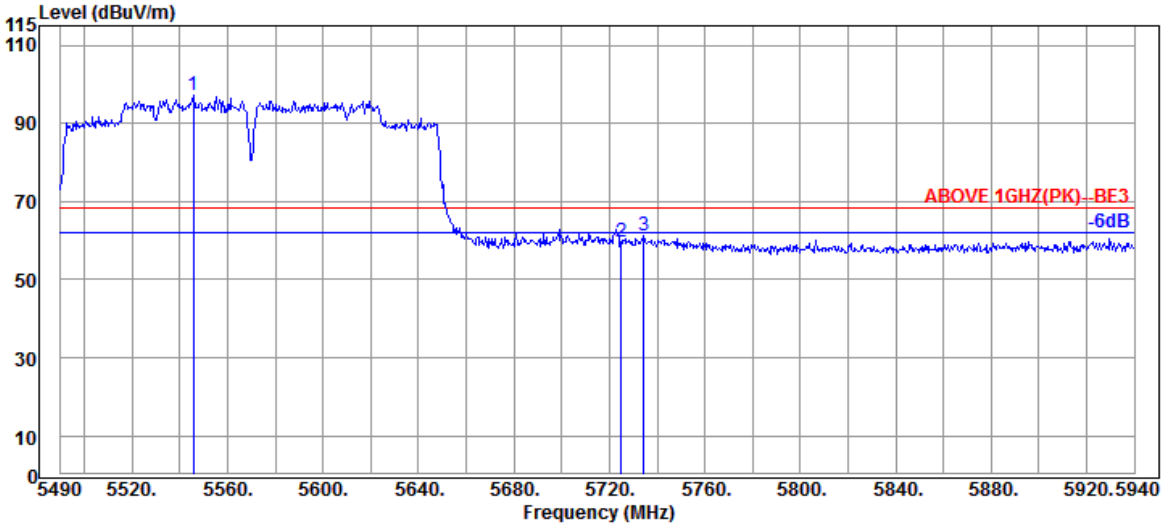


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5545.800 | 34.10 | 9.10 | 39.27 | 93.26 | 97.19 | --- | --- | Peak |
| 5724.900 | 33.80 | 9.20 | 39.30 | 56.02 | 59.72 | 68.20 | 8.48 | Peak |
| 5734.350 | 33.80 | 9.20 | 39.31 | 57.46 | 61.15 | 68.20 | 7.05 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5180MHz |

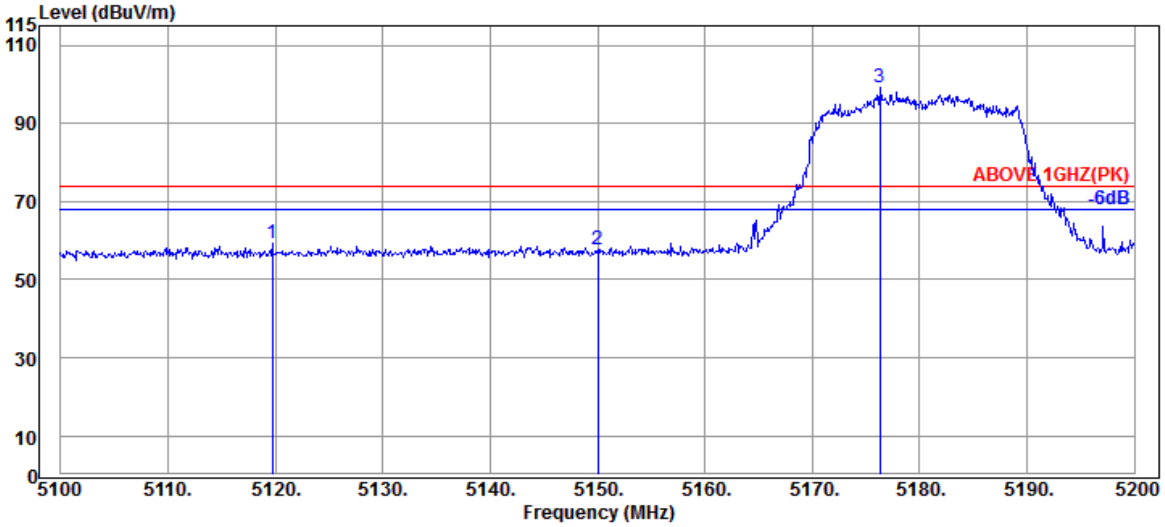


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5119.700 | 33.70 | 8.87 | 39.29 | 55.84 | 59.12 | 74.00 | 14.88 | Peak |
| | 5150.000 | 33.70 | 8.88 | 39.29 | 54.58 | 57.87 | 74.00 | 16.13 | Peak |
| @ | 5176.300 | 33.70 | 8.90 | 39.28 | 95.81 | 99.13 | --- | --- | Peak |

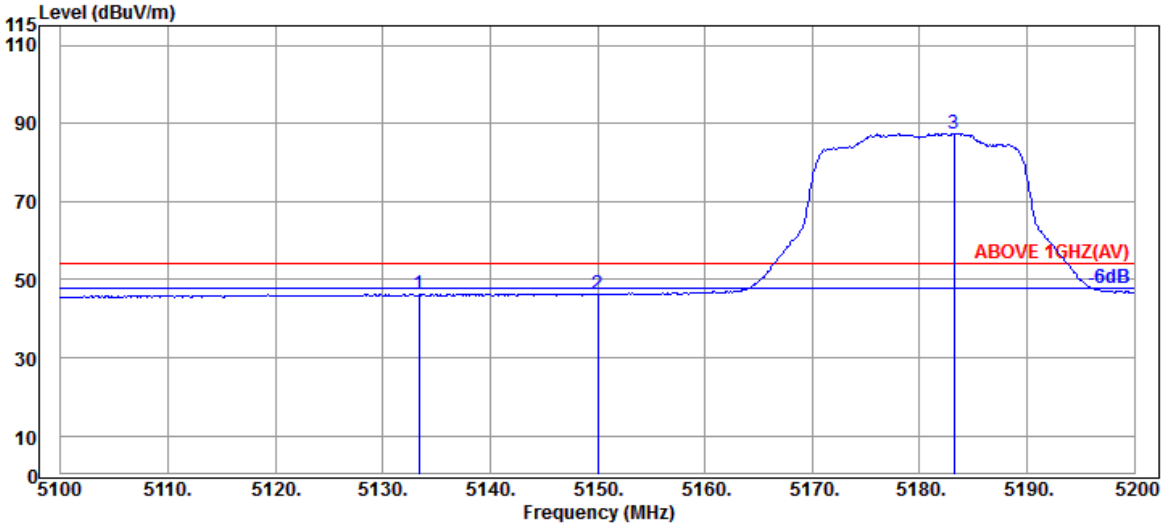


Antenna at Horizontal Polarization

| | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|---|
| | 5133.400 | 33.70 | 8.88 | 39.29 | 43.13 | 46.42 | 54.00 | 7.58 | Average |
| | 5150.000 | 33.70 | 8.88 | 39.29 | 42.85 | 46.14 | 54.00 | 7.86 | Average |
| @ | 5183.200 | 33.70 | 8.90 | 39.28 | 84.11 | 87.43 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5180MHz |

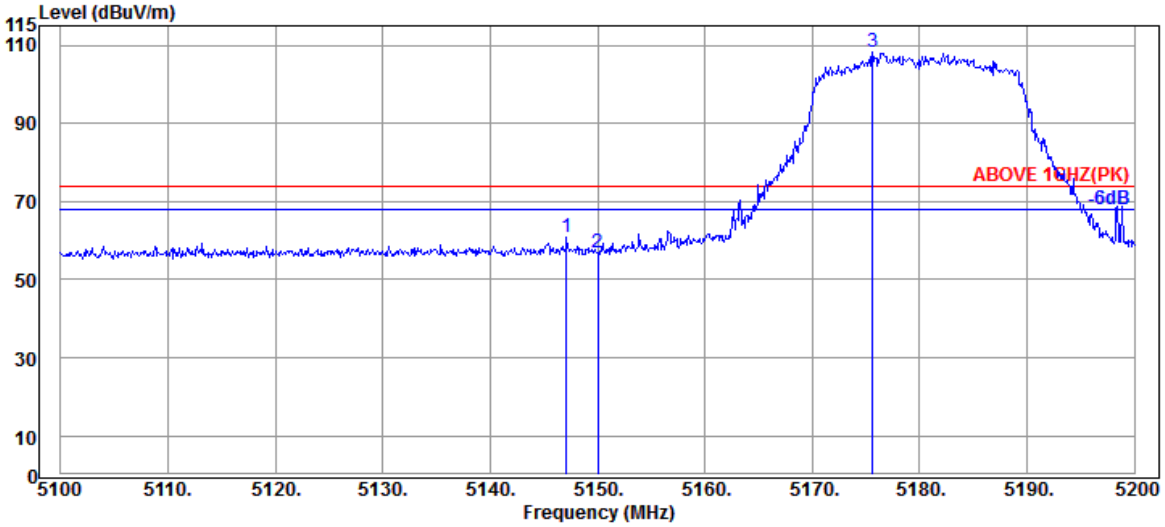


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5147.100 | 33.70 | 8.88 | 39.29 | 57.60 | 60.89 | 74.00 | 13.11 | Peak |
| 5150.000 | 33.70 | 8.88 | 39.29 | 53.68 | 56.97 | 74.00 | 17.03 | Peak |
| @ 5175.600 | 33.70 | 8.90 | 39.28 | 104.96 | 108.28 | --- | --- | Peak |

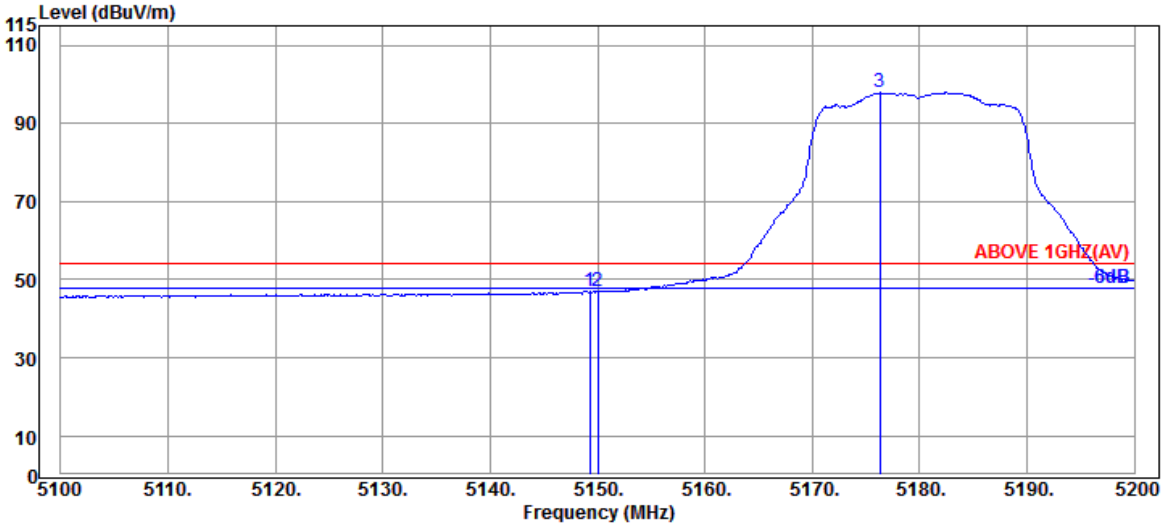


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5149.300 | 33.70 | 8.88 | 39.29 | 43.68 | 46.97 | 54.00 | 7.03 | Average |
| 5150.000 | 33.70 | 8.88 | 39.29 | 43.60 | 46.89 | 54.00 | 7.11 | Average |
| @ 5176.300 | 33.70 | 8.90 | 39.28 | 94.70 | 98.02 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5320MHz |

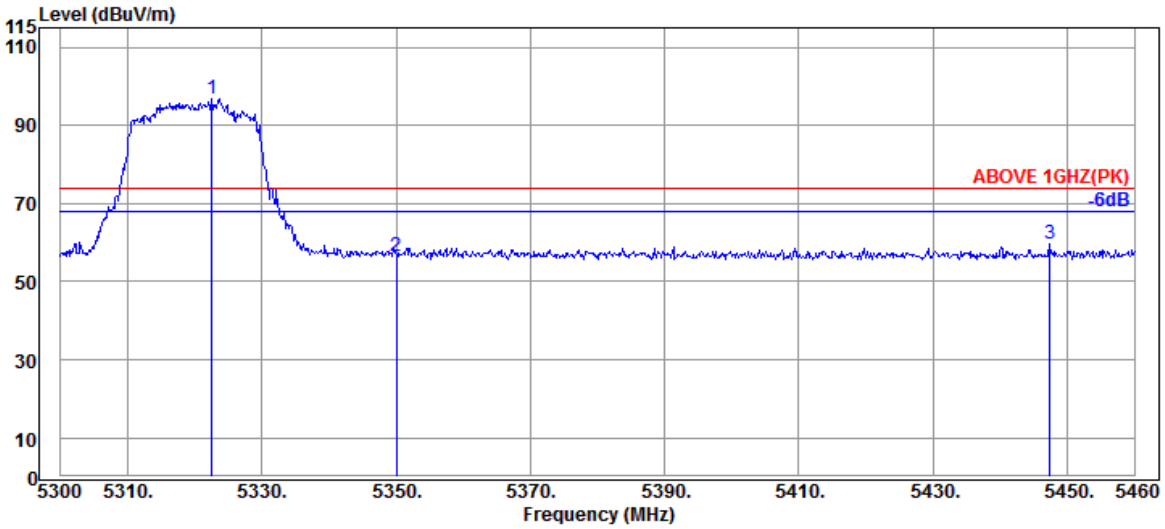


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5322.560 | 34.03 | 8.98 | 39.27 | 93.20 | 96.94 | --- | --- | Peak |
| 5350.080 | 33.90 | 8.99 | 39.27 | 53.05 | 56.67 | 74.00 | 17.33 | Peak |
| 5447.360 | 34.17 | 9.04 | 39.26 | 55.86 | 59.81 | 74.00 | 14.19 | Peak |

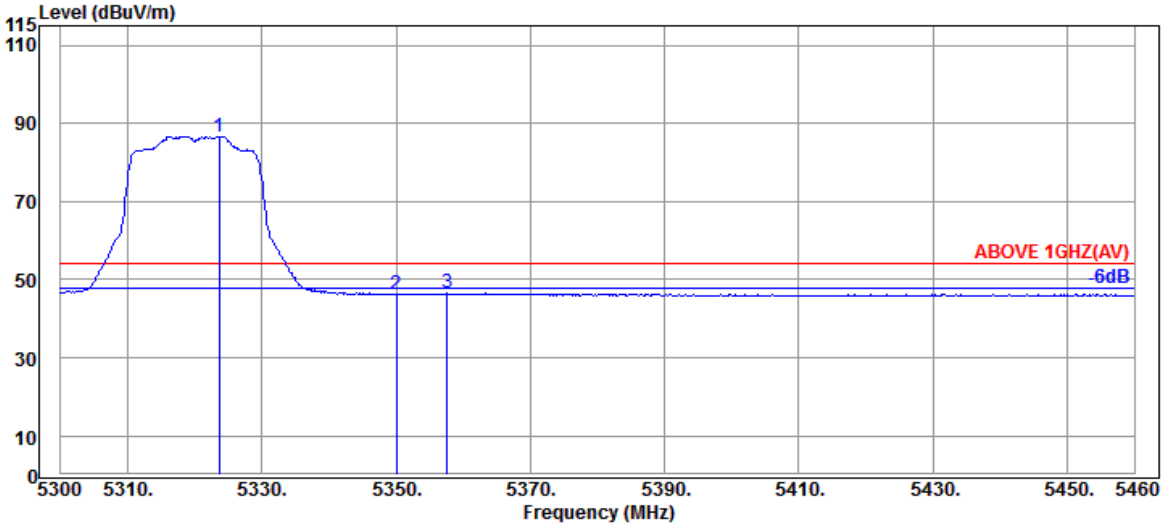


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5323.680 | 33.97 | 8.99 | 39.27 | 82.97 | 86.66 | --- | --- | Average |
| 5350.080 | 33.90 | 8.99 | 39.27 | 42.70 | 46.32 | 54.00 | 7.68 | Average |
| 5357.600 | 33.97 | 9.00 | 39.27 | 42.74 | 46.44 | 54.00 | 7.56 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5320MHz |

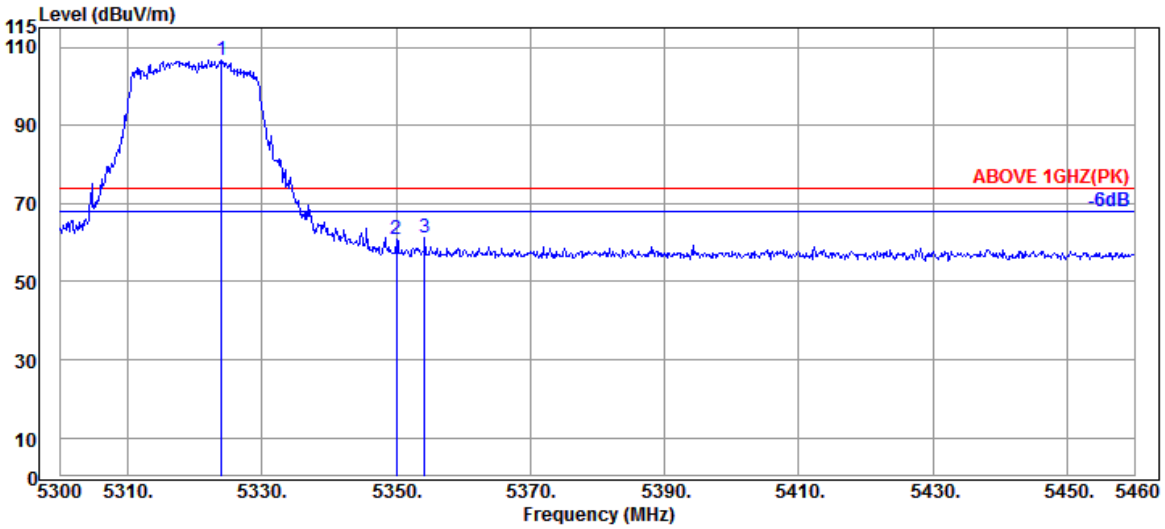


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5324.000 | 33.97 | 8.99 | 39.27 | 103.18 | 106.87 | --- | --- | Peak |
| 5350.080 | 33.90 | 8.99 | 39.27 | 57.15 | 60.77 | 74.00 | 13.23 | Peak |
| 5354.240 | 33.97 | 9.00 | 39.27 | 57.37 | 61.07 | 74.00 | 12.93 | Peak |

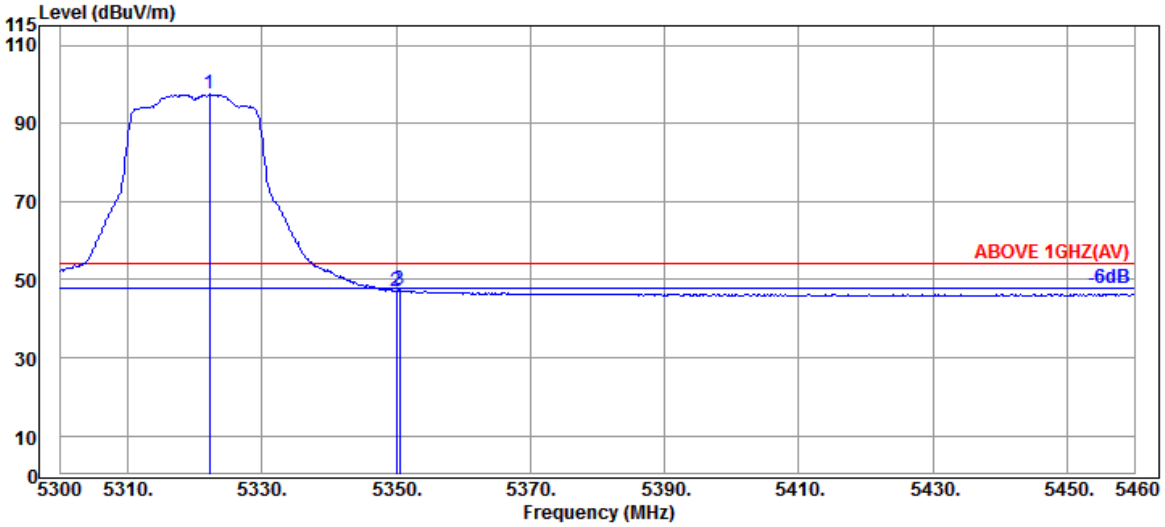


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5322.240 | 34.03 | 8.98 | 39.27 | 93.69 | 97.43 | --- | --- | Average |
| 5350.080 | 33.90 | 8.99 | 39.27 | 43.41 | 47.03 | 54.00 | 6.97 | Average |
| 5350.560 | 33.90 | 8.99 | 39.27 | 43.70 | 47.32 | 54.00 | 6.68 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5500MHz |

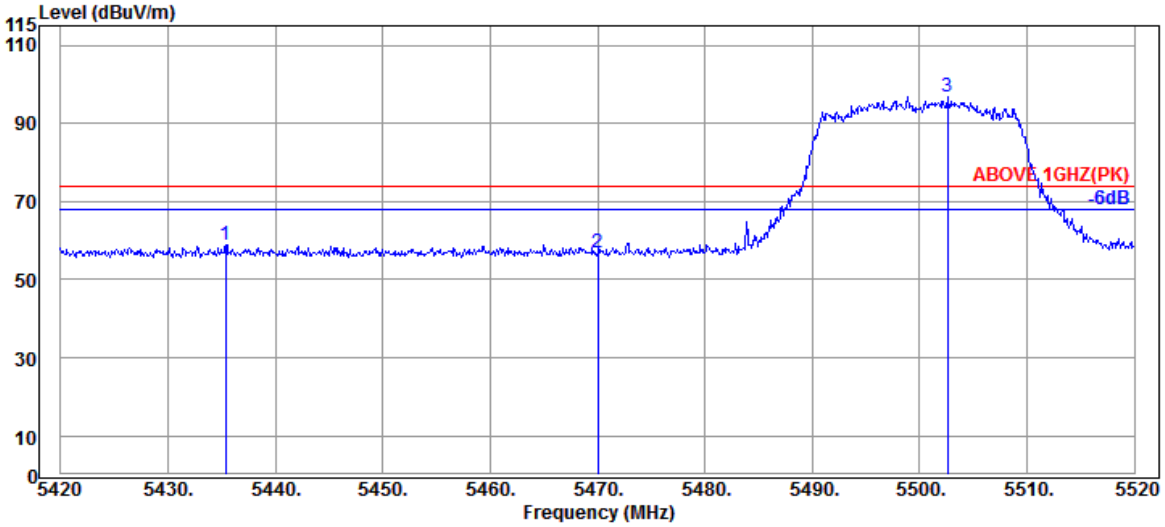


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5435.400 | 34.17 | 9.04 | 39.26 | 54.85 | 58.80 | 74.00 | 15.20 | Peak |
| 5470.000 | 34.17 | 9.06 | 39.26 | 53.11 | 57.08 | 74.00 | 16.92 | Peak |
| @ 5502.600 | 34.10 | 9.08 | 39.26 | 92.77 | 96.69 | --- | --- | Peak |

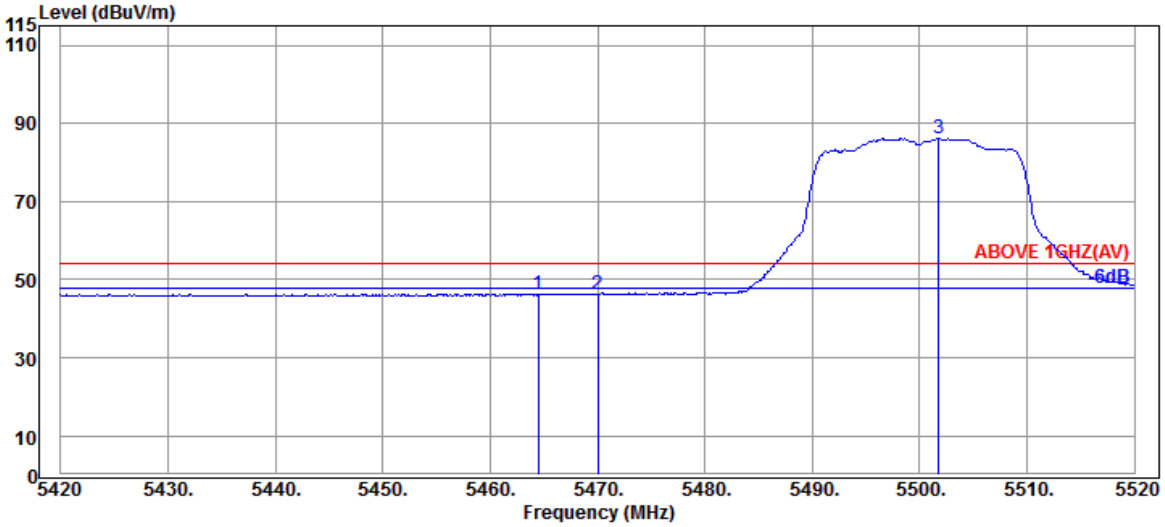


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5464.500 | 34.17 | 9.06 | 39.26 | 42.36 | 46.33 | 54.00 | 7.67 | Average |
| 5470.000 | 34.17 | 9.06 | 39.26 | 42.24 | 46.21 | 54.00 | 7.79 | Average |
| @ 5501.800 | 34.10 | 9.08 | 39.26 | 82.15 | 86.07 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5500MHz |

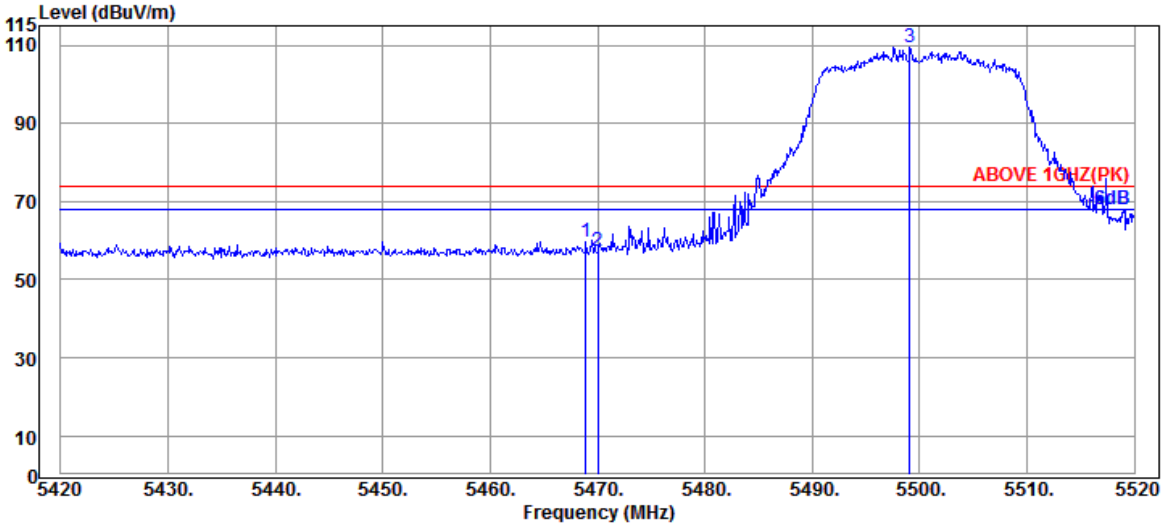


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.900 | 34.17 | 9.06 | 39.26 | 55.79 | 59.76 | 74.00 | 14.24 | Peak |
| 5470.000 | 34.17 | 9.06 | 39.26 | 53.23 | 57.20 | 74.00 | 16.80 | Peak |
| @ 5499.100 | 34.10 | 9.08 | 39.26 | 105.69 | 109.61 | --- | --- | Peak |

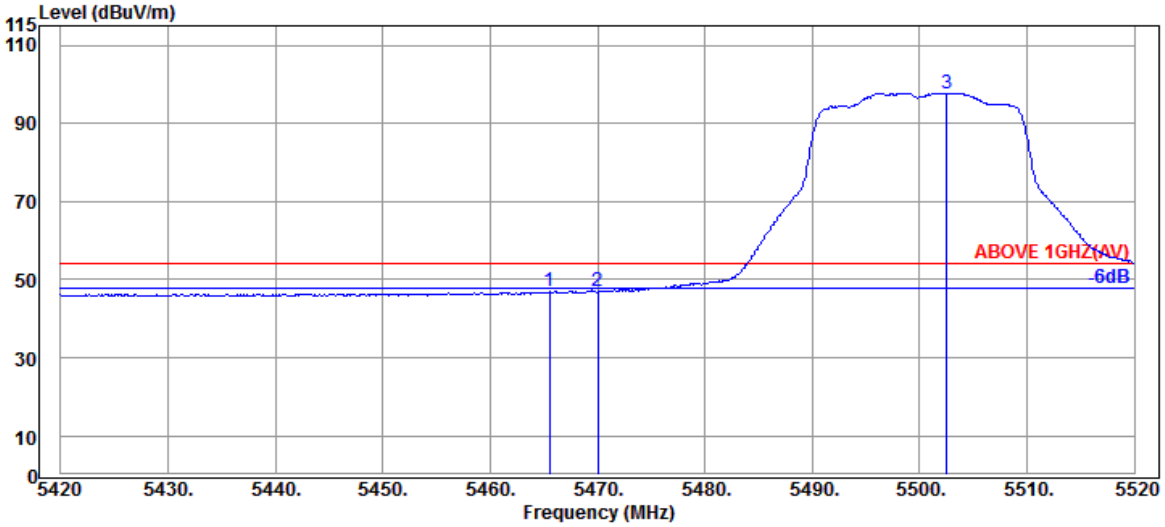


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5465.500 | 34.17 | 9.06 | 39.26 | 43.00 | 46.97 | 54.00 | 7.03 | Average |
| 5470.000 | 34.17 | 9.06 | 39.26 | 42.99 | 46.96 | 54.00 | 7.04 | Average |
| @ 5502.500 | 34.10 | 9.08 | 39.26 | 93.87 | 97.79 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5700MHz |

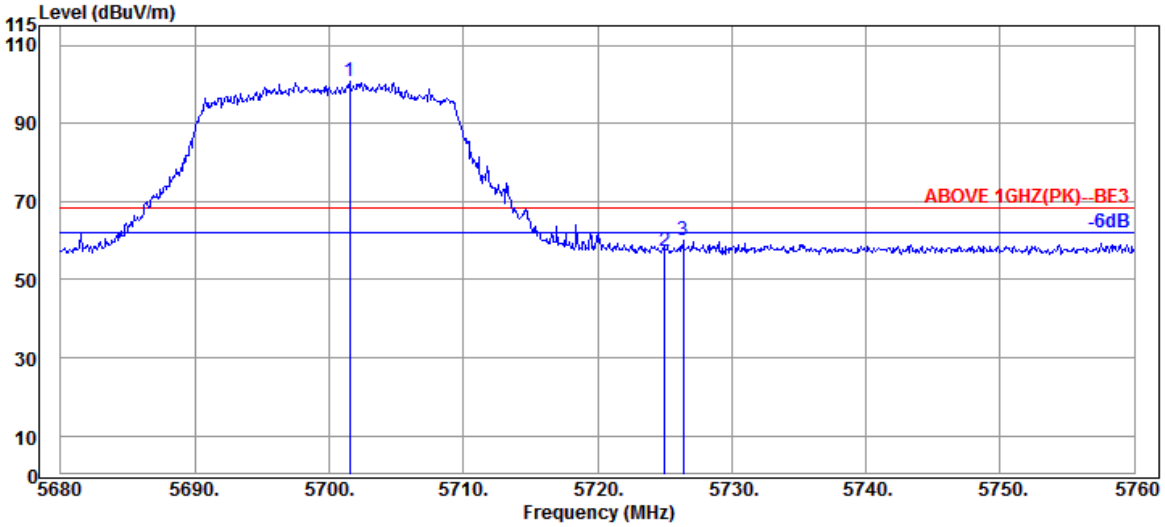


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5701.520 | 33.80 | 9.18 | 39.30 | 97.00 | 100.68 | --- | --- | Peak |
| 5725.040 | 33.80 | 9.20 | 39.30 | 53.64 | 57.34 | 68.20 | 10.86 | Peak |
| 5726.400 | 33.80 | 9.20 | 39.31 | 56.41 | 60.10 | 68.20 | 8.10 | Peak |

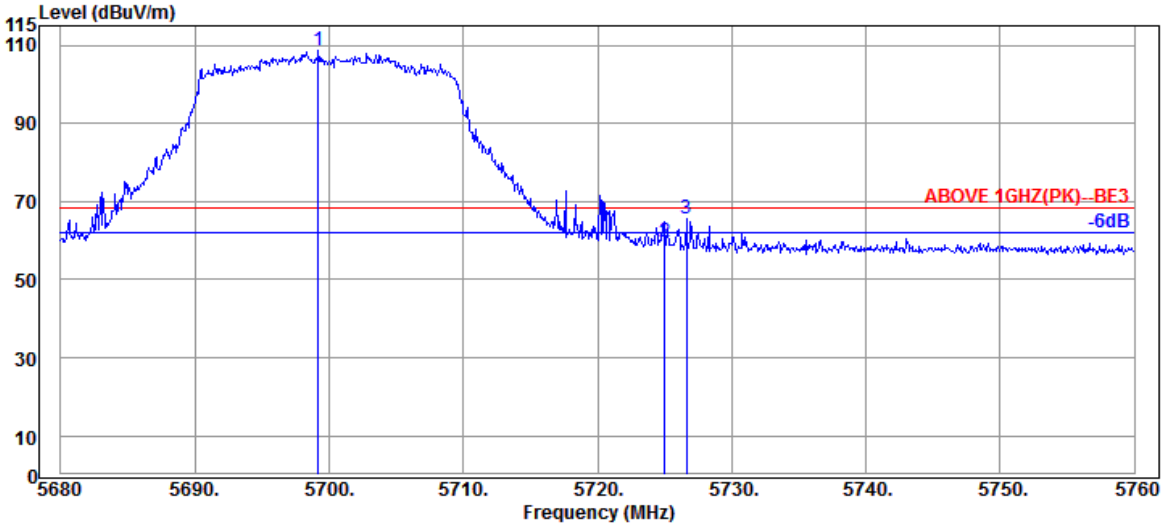


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5699.200 | 33.80 | 9.18 | 39.30 | 105.14 | 108.82 | --- | --- | Peak |
| 5725.040 | 33.80 | 9.20 | 39.30 | 55.84 | 59.54 | 68.20 | 8.66 | Peak |
| 5726.640 | 33.80 | 9.20 | 39.31 | 61.92 | 65.61 | 68.20 | 2.59 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

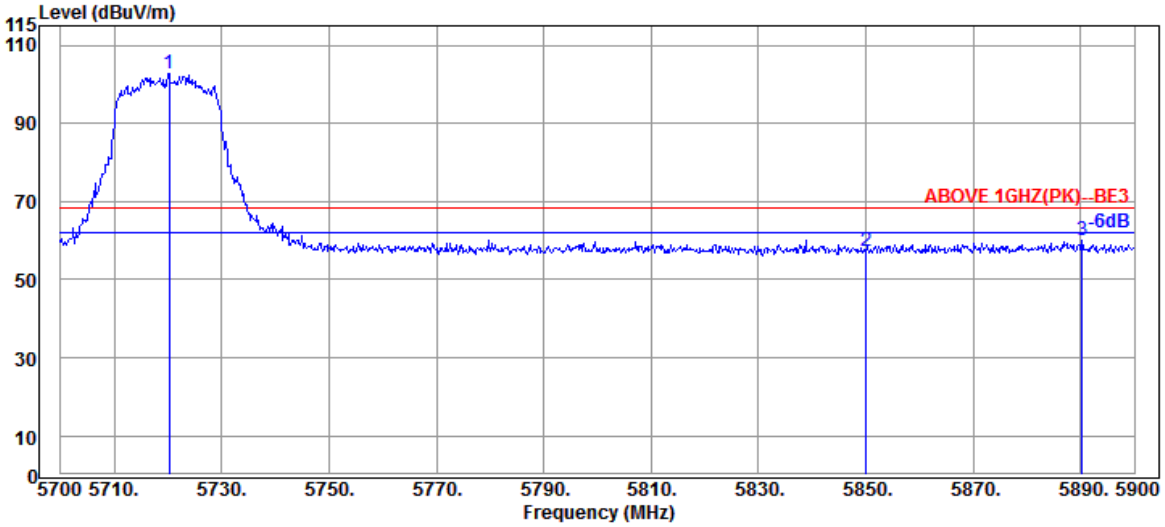


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5720.200 | 33.80 | 9.19 | 39.30 | 99.17 | 102.86 | --- | --- | Peak |
| 5850.000 | 34.10 | 9.25 | 39.33 | 53.29 | 57.31 | 68.20 | 10.89 | Peak |
| 5890.200 | 34.10 | 9.28 | 39.34 | 56.22 | 60.26 | 68.20 | 7.94 | Peak |

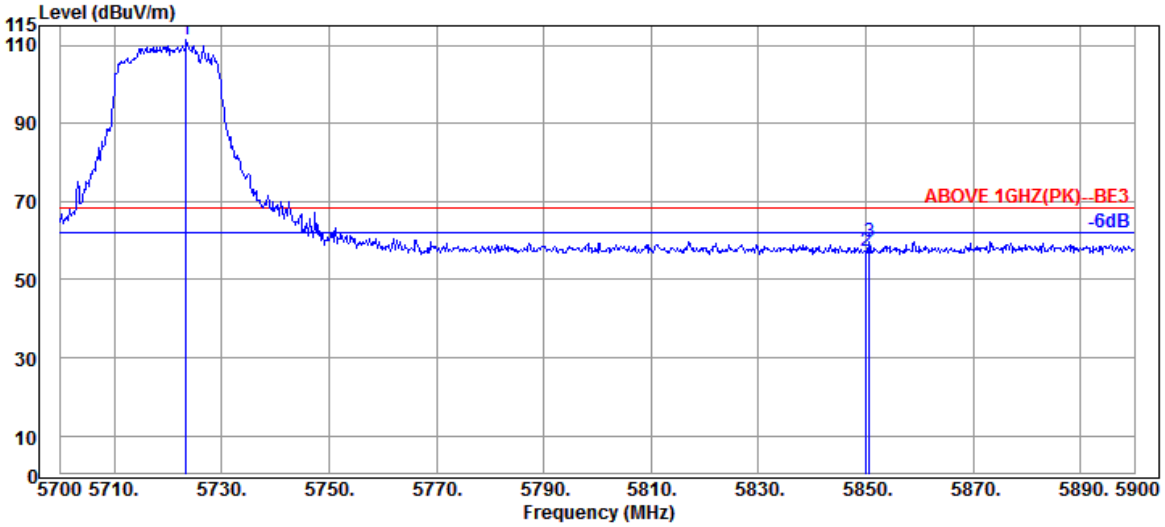


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5723.400 | 33.80 | 9.20 | 39.30 | 107.55 | 111.25 | --- | --- | Peak |
| 5850.000 | 34.10 | 9.25 | 39.33 | 53.19 | 57.21 | 68.20 | 10.99 | Peak |
| 5850.600 | 34.10 | 9.25 | 39.33 | 55.76 | 59.78 | 68.20 | 8.42 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

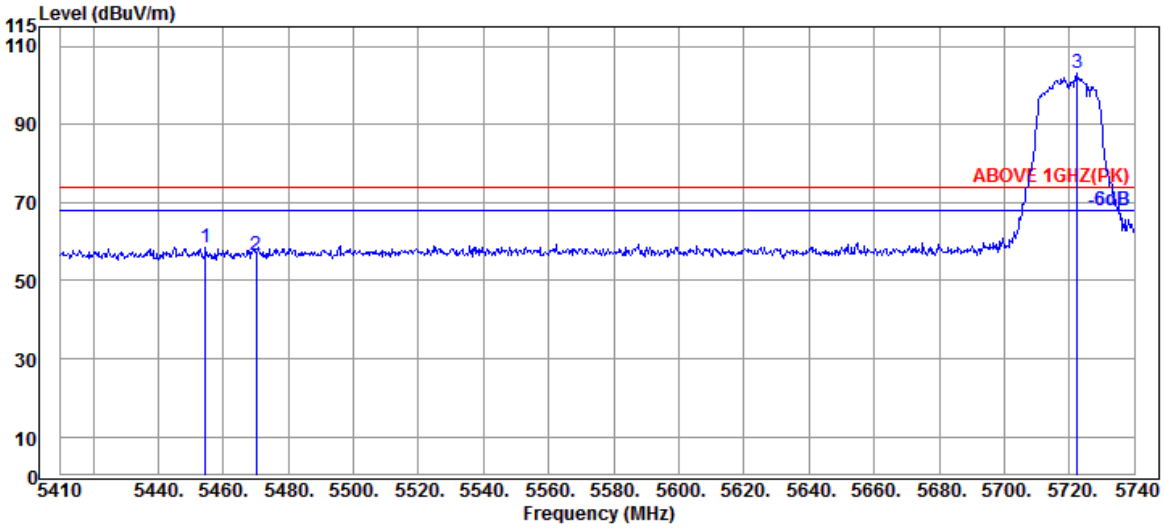


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5454.550 | 34.20 | 9.05 | 39.26 | 54.49 | 58.48 | 74.00 | 15.52 | Peak |
| 5470.060 | 34.17 | 9.06 | 39.26 | 52.69 | 56.66 | 74.00 | 17.34 | Peak |
| @ 5722.510 | 33.80 | 9.20 | 39.30 | 99.35 | 103.05 | --- | --- | Peak |

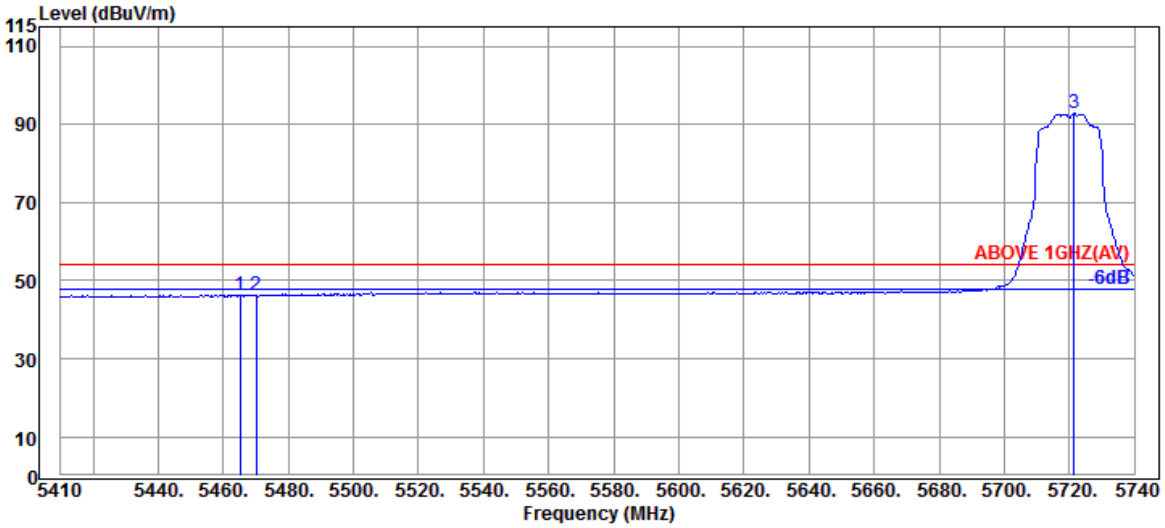


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5465.110 | 34.17 | 9.06 | 39.26 | 42.37 | 46.34 | 54.00 | 7.66 | Average |
| 5470.060 | 34.17 | 9.06 | 39.26 | 42.43 | 46.40 | 54.00 | 7.60 | Average |
| @ 5721.520 | 33.80 | 9.19 | 39.30 | 89.16 | 92.85 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5720MHz |

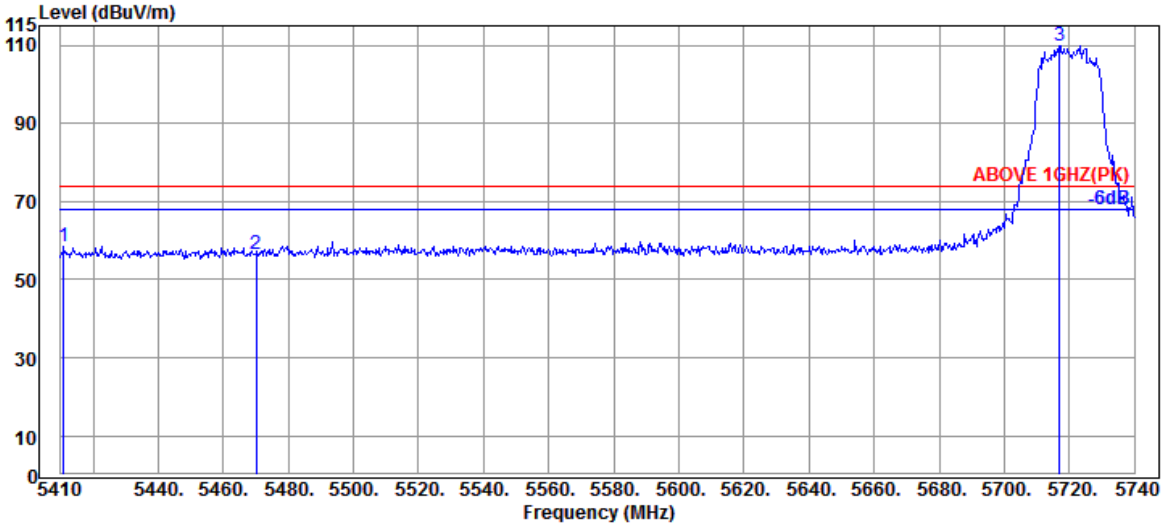


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5410.990 | 34.12 | 9.03 | 39.27 | 54.56 | 58.44 | 74.00 | 15.56 | Peak |
| 5470.060 | 34.17 | 9.06 | 39.26 | 52.38 | 56.35 | 74.00 | 17.65 | Peak |
| @ 5716.900 | 33.80 | 9.19 | 39.30 | 106.26 | 109.95 | --- | --- | Peak |

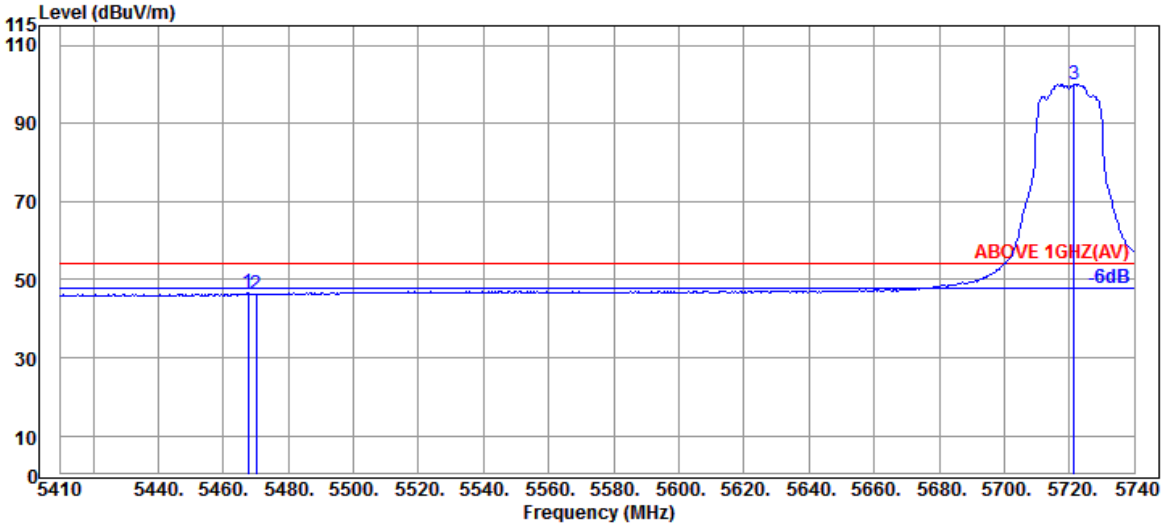


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5467.750 | 34.17 | 9.06 | 39.26 | 42.48 | 46.45 | 54.00 | 7.55 | Average |
| 5470.060 | 34.17 | 9.06 | 39.26 | 42.32 | 46.29 | 54.00 | 7.71 | Average |
| @ 5721.520 | 33.80 | 9.19 | 39.30 | 96.40 | 100.09 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-HE20 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5745MHz |

Antenna at Horizontal Polarization

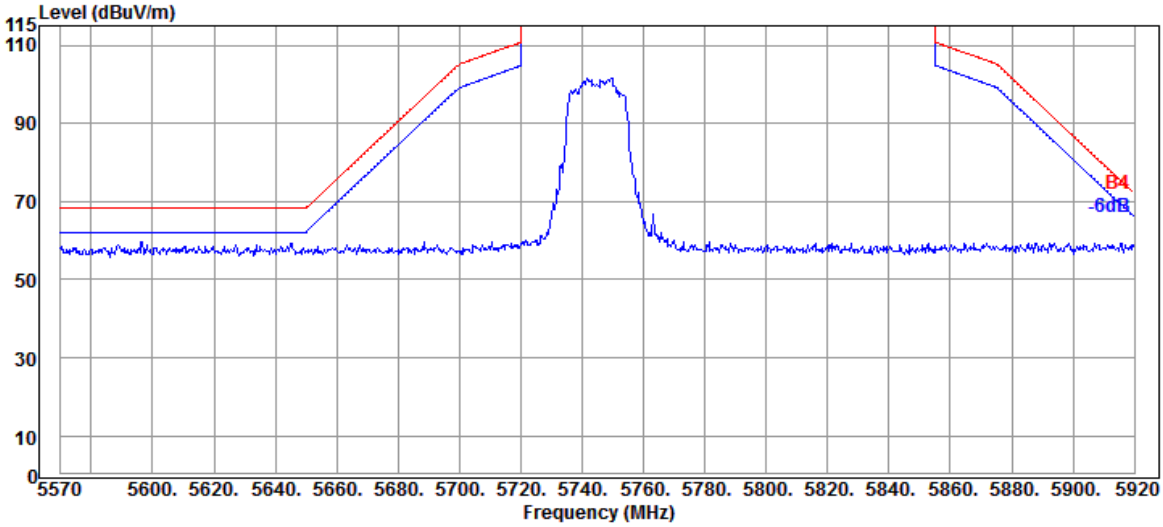


Antenna at Vertical Polarization

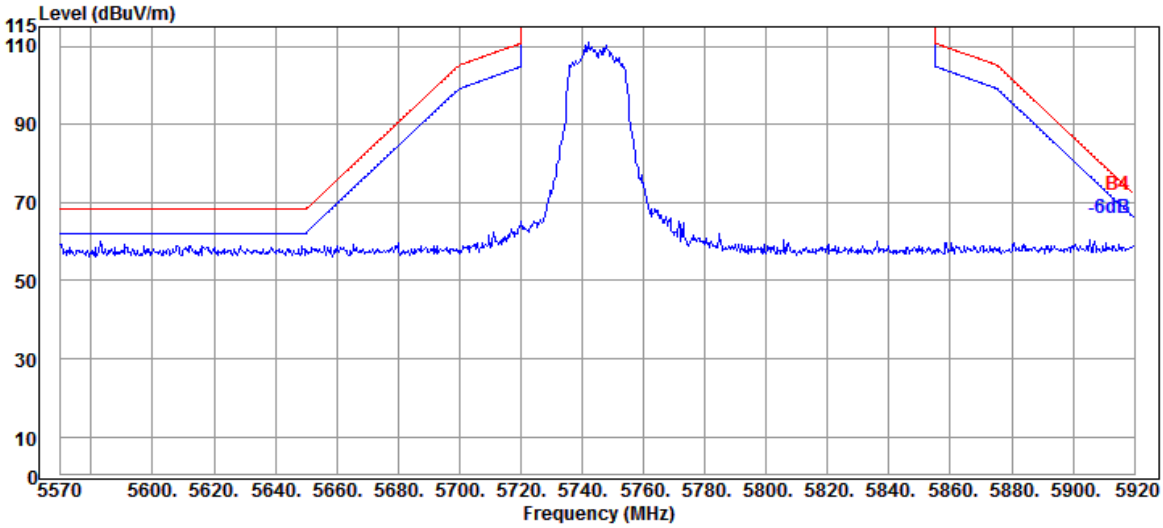




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ac-HE20 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5825MHz |

Antenna at Horizontal Polarization

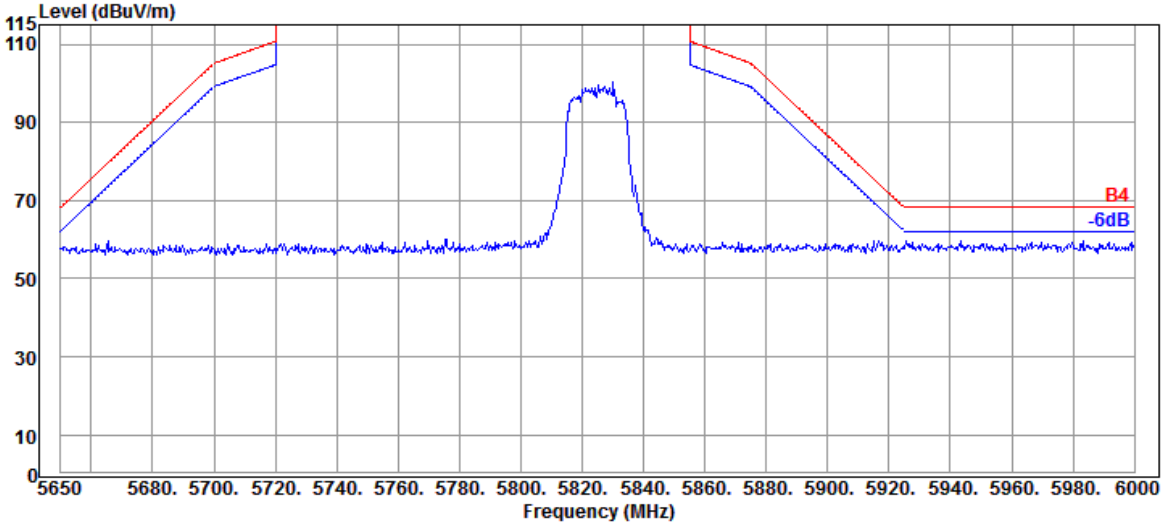


Antenna at Vertical Polarization

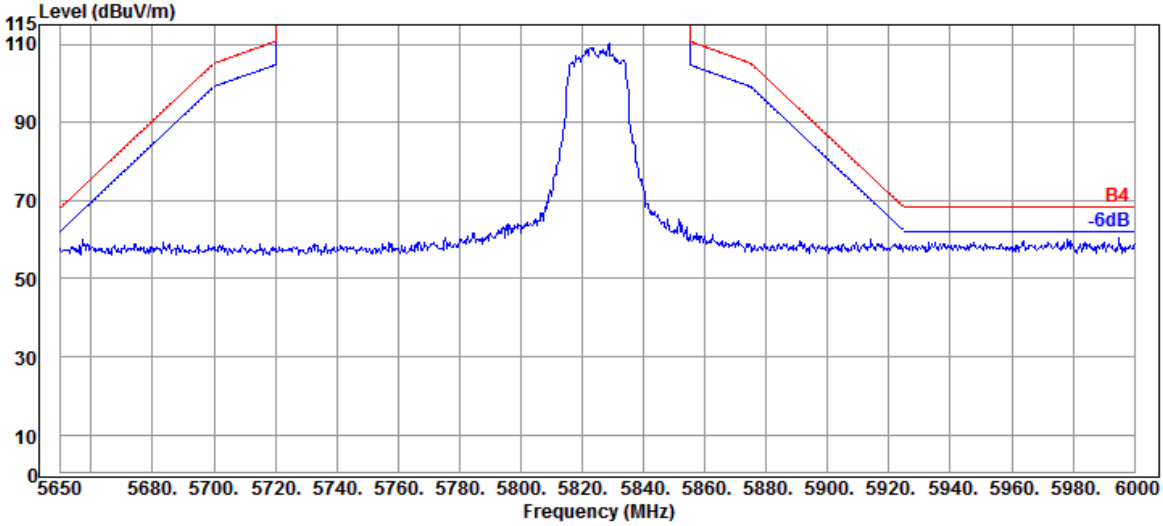




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5190MHz |

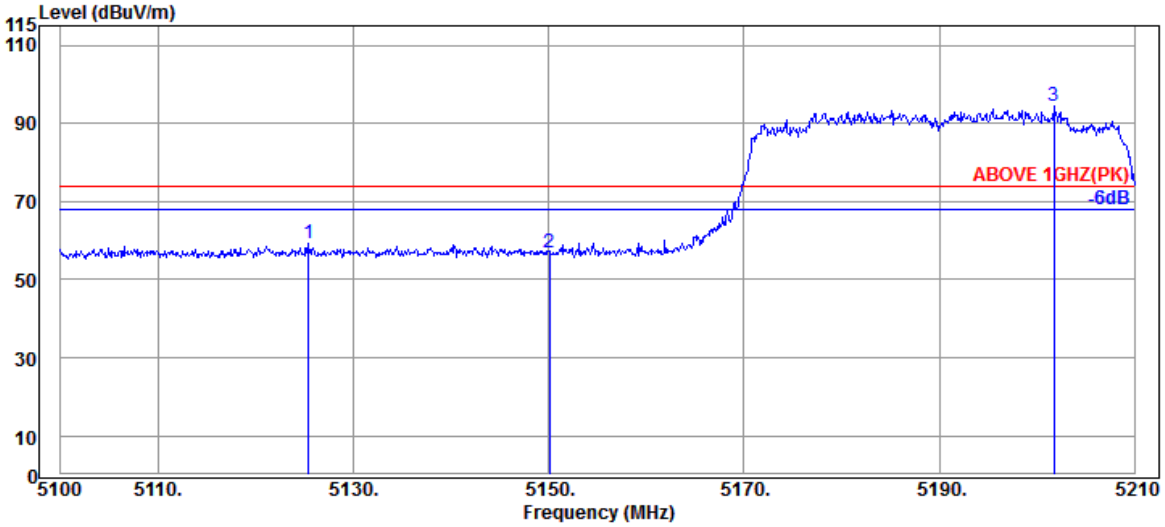


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5125.410 | 33.70 | 8.87 | 39.29 | 56.00 | 59.28 | 74.00 | 14.72 | Peak |
| 5150.050 | 33.70 | 8.88 | 39.29 | 53.68 | 56.97 | 74.00 | 17.03 | Peak |
| @ 5201.750 | 33.72 | 8.92 | 39.28 | 90.94 | 94.30 | --- | --- | Peak |

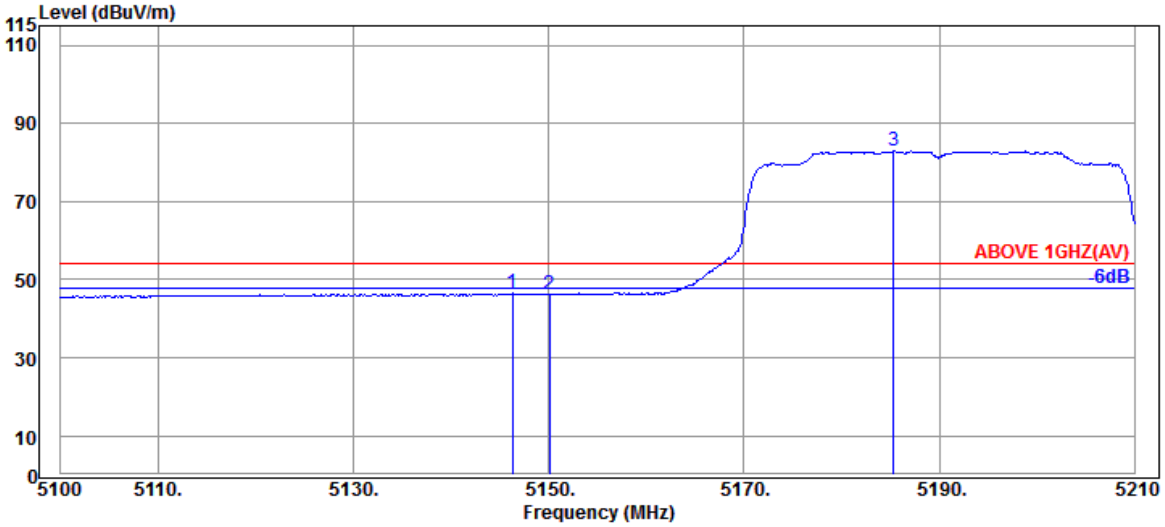


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5146.310 | 33.70 | 8.88 | 39.29 | 43.18 | 46.47 | 54.00 | 7.53 | Average |
| 5150.050 | 33.70 | 8.88 | 39.29 | 43.00 | 46.29 | 54.00 | 7.71 | Average |
| @ 5185.360 | 33.70 | 8.90 | 39.28 | 79.56 | 82.88 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 1 |
|---|---|---|---|
| | | Frequency | TX 5190MHz |

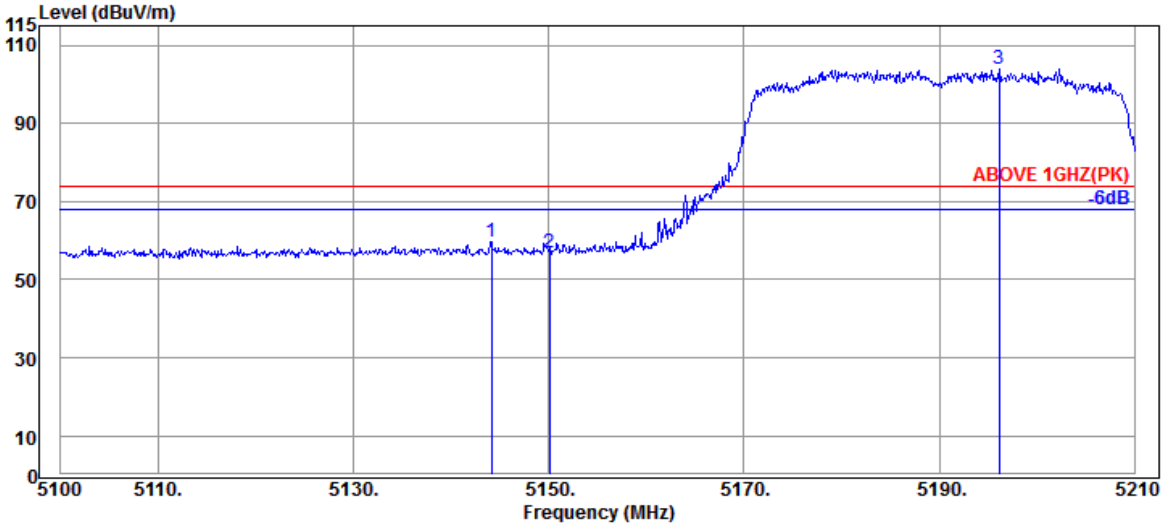


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5144.110 | 33.70 | 8.88 | 39.29 | 56.33 | 59.62 | 74.00 | 14.38 | Peak |
| 5150.050 | 33.70 | 8.88 | 39.29 | 53.57 | 56.86 | 74.00 | 17.14 | Peak |
| @ 5196.140 | 33.70 | 8.91 | 39.28 | 100.53 | 103.86 | --- | --- | Peak |

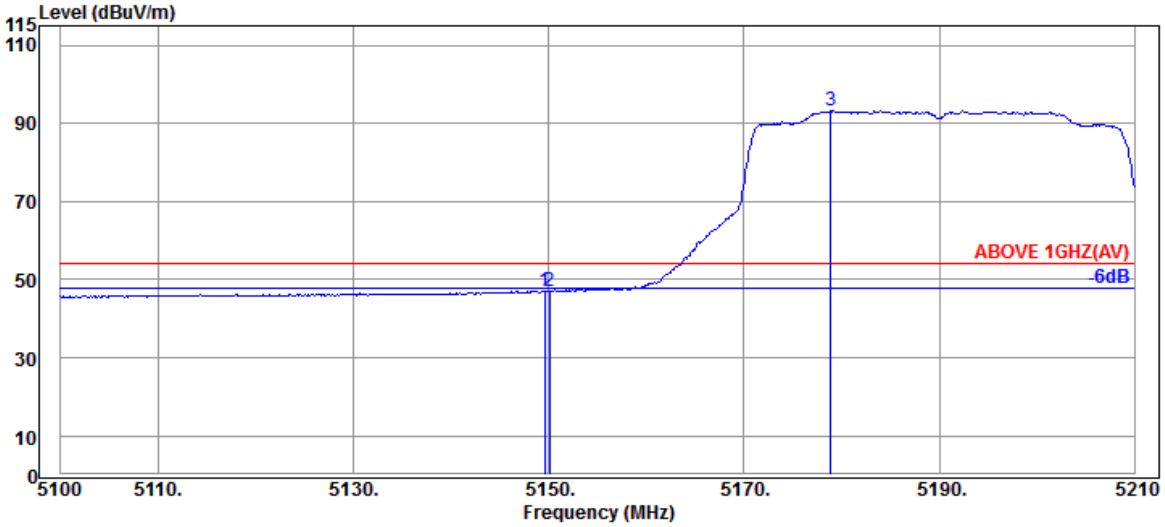


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5149.610 | 33.70 | 8.88 | 39.29 | 43.84 | 47.13 | 54.00 | 6.87 | Average |
| 5150.050 | 33.70 | 8.88 | 39.29 | 43.86 | 47.15 | 54.00 | 6.85 | Average |
| @ 5178.870 | 33.70 | 8.90 | 39.28 | 89.94 | 93.26 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5310MHz |

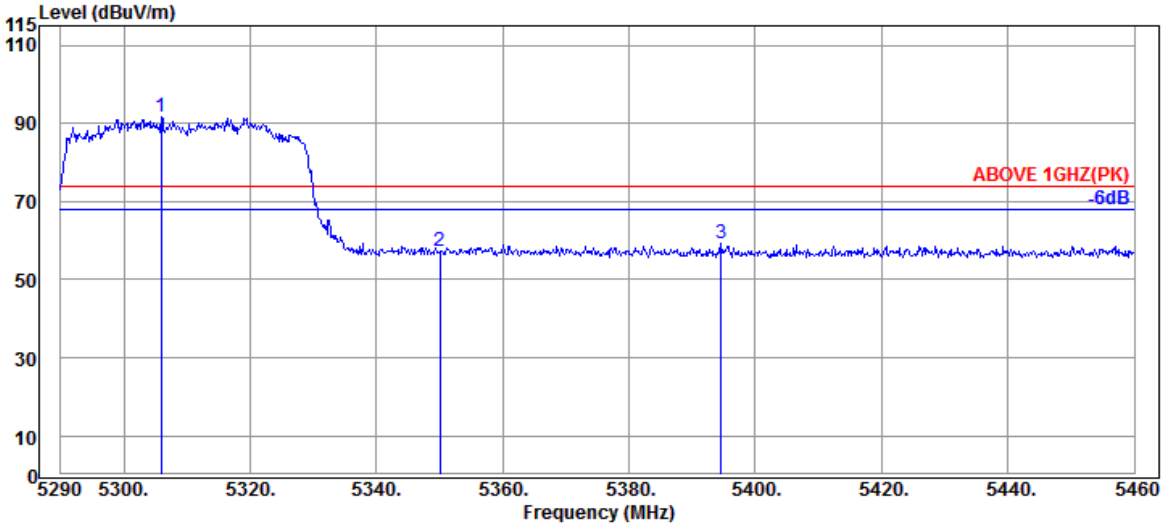


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5305.980 | 34.10 | 8.97 | 39.28 | 87.86 | 91.65 | --- | --- | Peak |
| 5350.010 | 33.90 | 8.99 | 39.27 | 53.77 | 57.39 | 74.00 | 16.61 | Peak |
| 5394.550 | 34.10 | 9.02 | 39.27 | 55.25 | 59.10 | 74.00 | 14.90 | Peak |

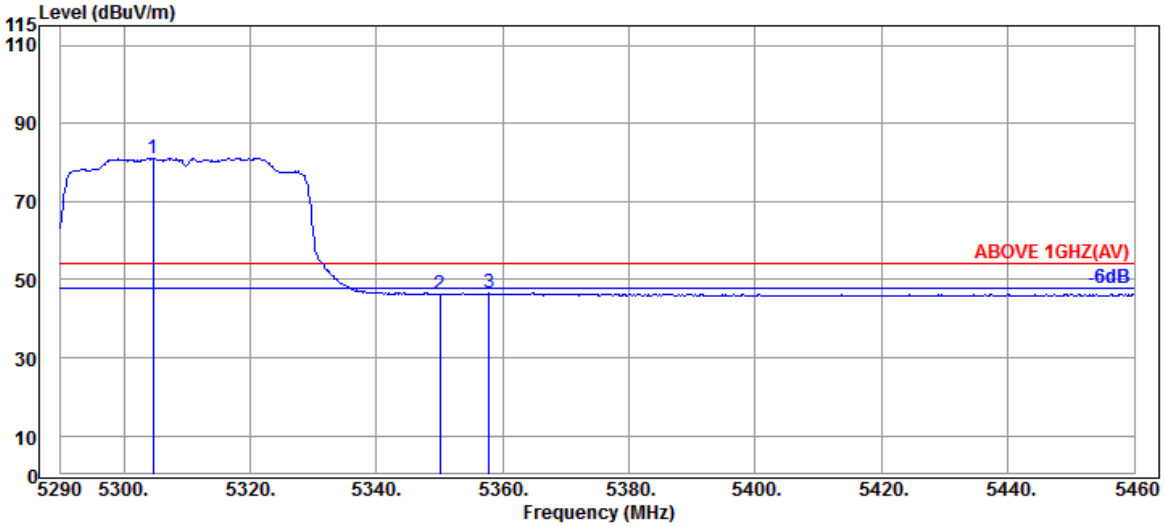


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5304.620 | 34.10 | 8.97 | 39.28 | 77.31 | 81.10 | --- | --- | Average |
| 5350.010 | 33.90 | 8.99 | 39.27 | 42.52 | 46.14 | 54.00 | 7.86 | Average |
| 5357.830 | 33.97 | 9.00 | 39.27 | 42.80 | 46.50 | 54.00 | 7.50 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 2A |
|---|---|---|---|
| | | Frequency | TX 5310MHz |

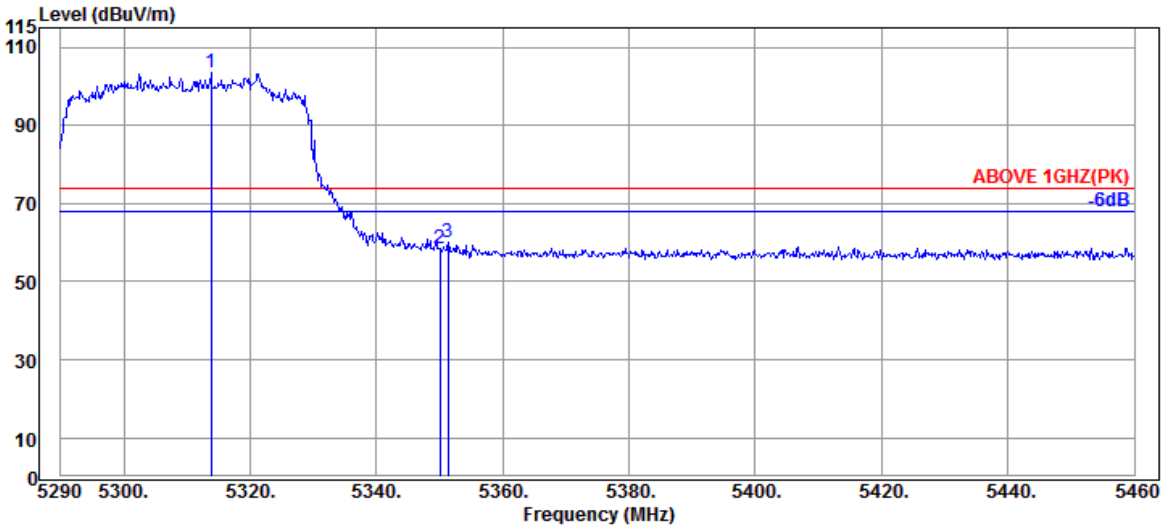


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5313.800 | 34.03 | 8.98 | 39.27 | 99.70 | 103.44 | --- | --- | Peak |
| 5350.010 | 33.90 | 8.99 | 39.27 | 54.80 | 58.42 | 74.00 | 15.58 | Peak |
| 5351.370 | 33.90 | 8.99 | 39.27 | 56.35 | 59.97 | 74.00 | 14.03 | Peak |

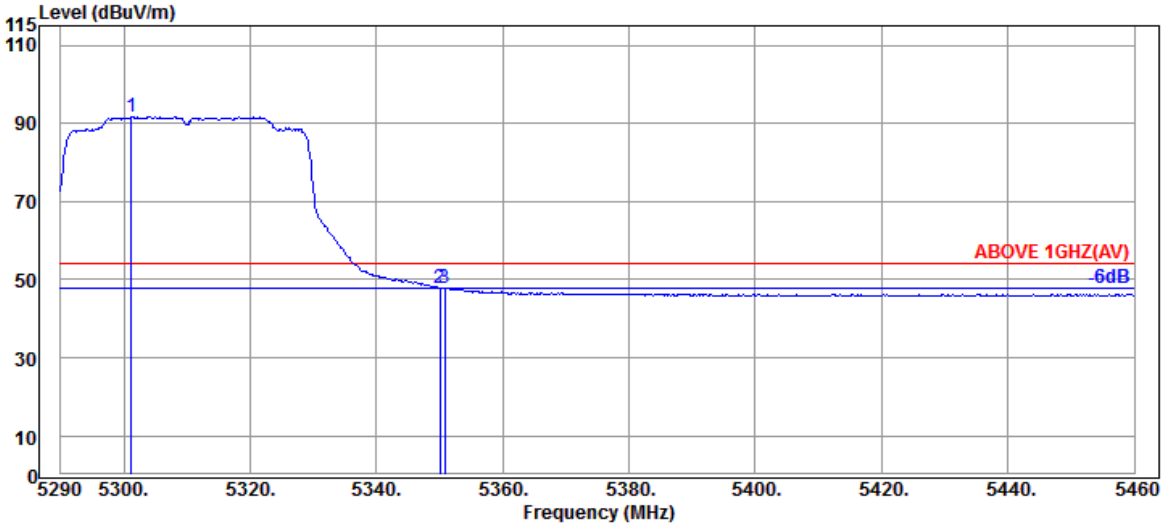


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5301.220 | 34.10 | 8.97 | 39.28 | 87.94 | 91.73 | --- | --- | Average |
| 5350.010 | 33.90 | 8.99 | 39.27 | 44.16 | 47.78 | 54.00 | 6.22 | Average |
| 5350.860 | 33.90 | 8.99 | 39.27 | 44.29 | 47.91 | 54.00 | 6.09 | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5510MHz |

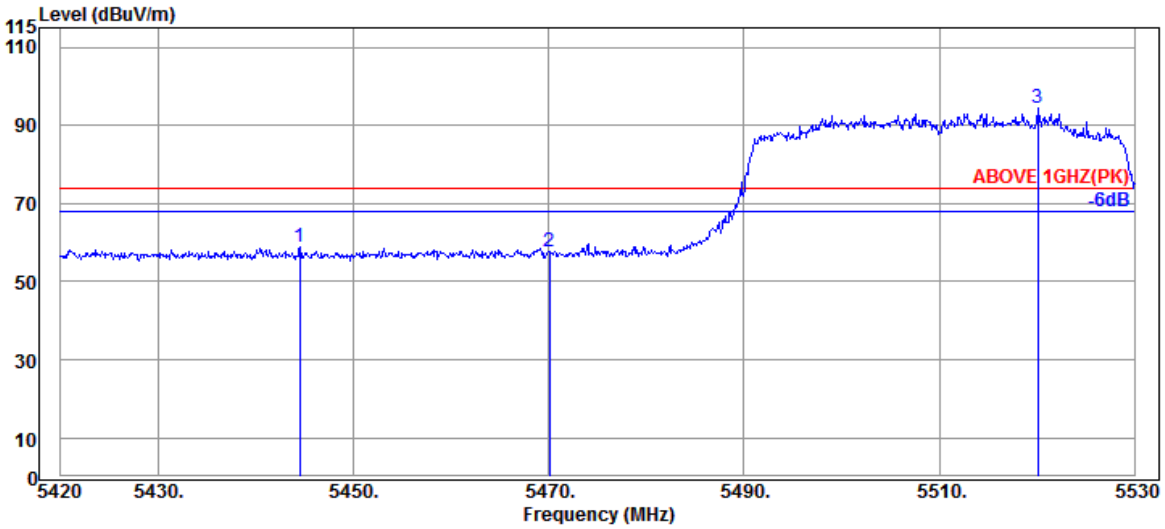


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5444.530 | 34.17 | 9.04 | 39.26 | 54.84 | 58.79 | 74.00 | 15.21 | Peak |
| 5470.050 | 34.17 | 9.06 | 39.26 | 53.65 | 57.62 | 74.00 | 16.38 | Peak |
| @ 5520.100 | 34.10 | 9.09 | 39.26 | 90.37 | 94.30 | --- | --- | Peak |

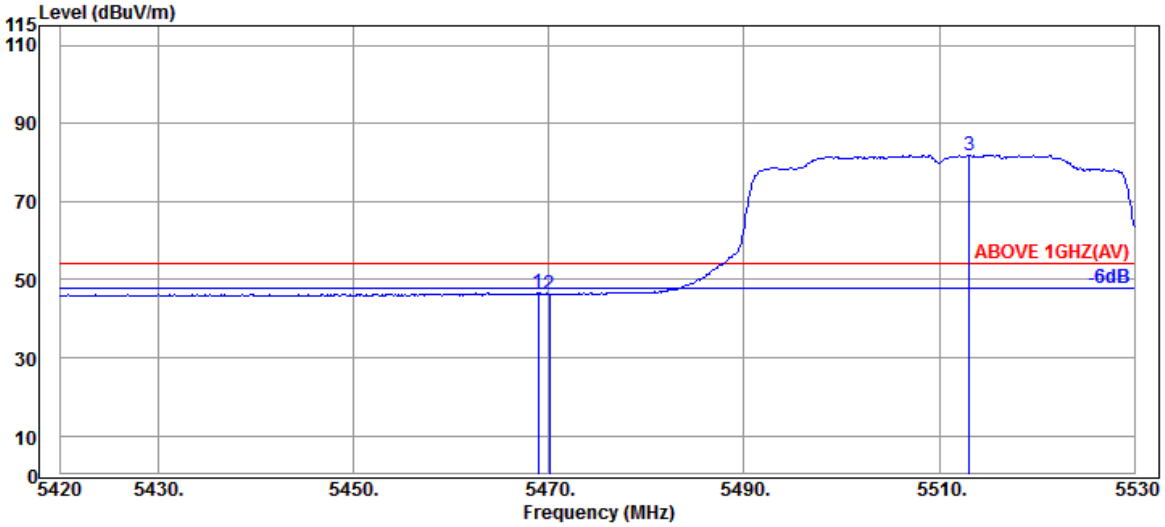


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.950 | 34.17 | 9.06 | 39.26 | 42.59 | 46.56 | 54.00 | 7.44 | Average |
| 5470.050 | 34.17 | 9.06 | 39.26 | 42.22 | 46.19 | 54.00 | 7.81 | Average |
| @ 5513.060 | 34.10 | 9.09 | 39.26 | 77.89 | 81.82 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5510MHz |

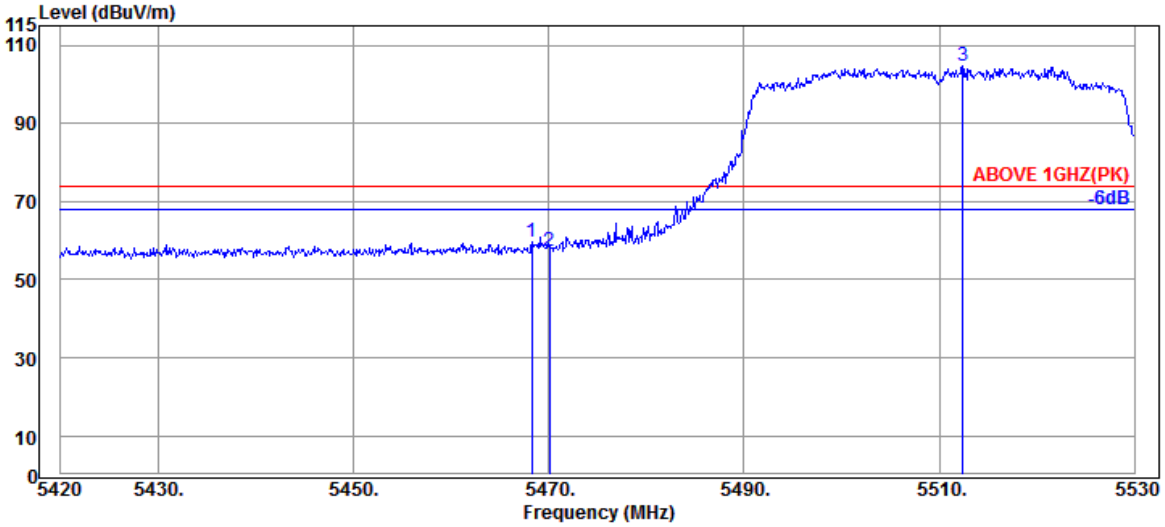


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.290 | 34.17 | 9.06 | 39.26 | 55.86 | 59.83 | 74.00 | 14.17 | Peak |
| 5470.050 | 34.17 | 9.06 | 39.26 | 53.27 | 57.24 | 74.00 | 16.76 | Peak |
| @ 5512.400 | 34.10 | 9.09 | 39.26 | 100.67 | 104.60 | --- | --- | Peak |

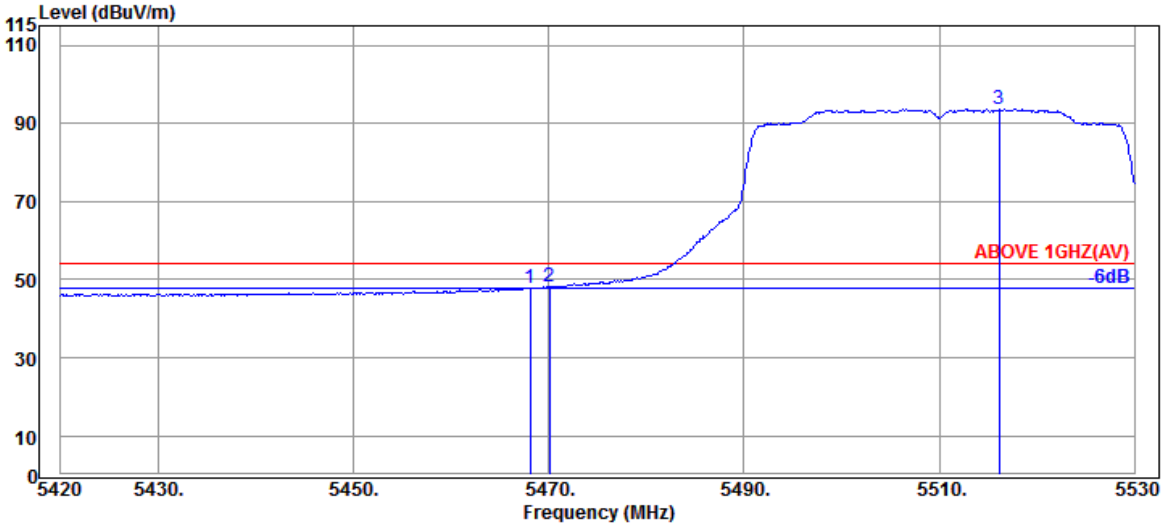


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5468.070 | 34.17 | 9.06 | 39.26 | 43.97 | 47.94 | 54.00 | 6.06 | Average |
| 5470.050 | 34.17 | 9.06 | 39.26 | 44.20 | 48.17 | 54.00 | 5.83 | Average |
| @ 5516.140 | 34.10 | 9.09 | 39.26 | 89.71 | 93.64 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5670MHz |

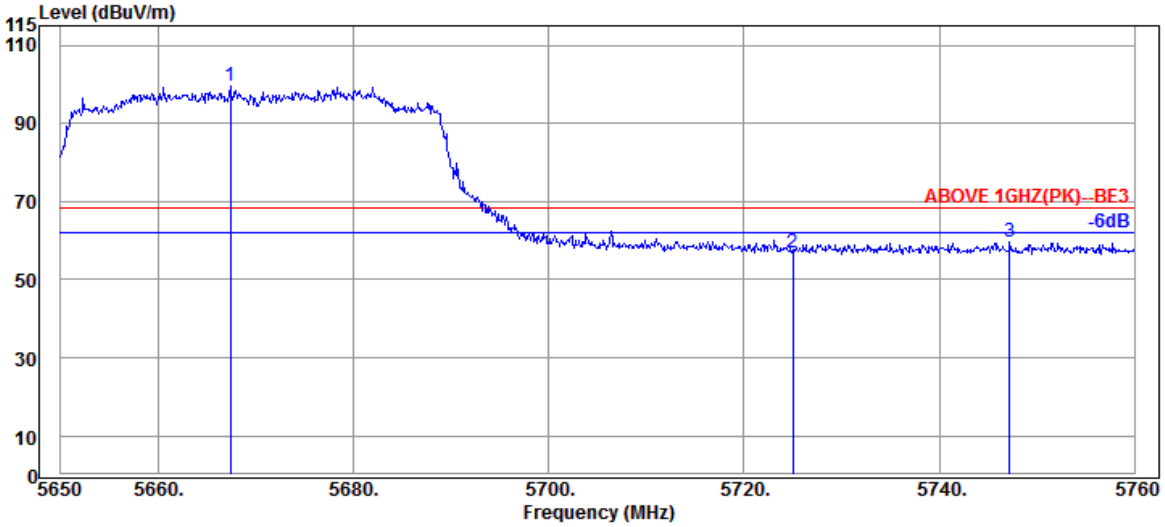


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5667.380 | 33.93 | 9.16 | 39.29 | 95.68 | 99.48 | --- | --- | Peak |
| 5725.020 | 33.80 | 9.20 | 39.30 | 53.40 | 57.10 | 68.20 | 11.10 | Peak |
| 5747.240 | 33.80 | 9.20 | 39.31 | 55.92 | 59.61 | 68.20 | 8.59 | Peak |

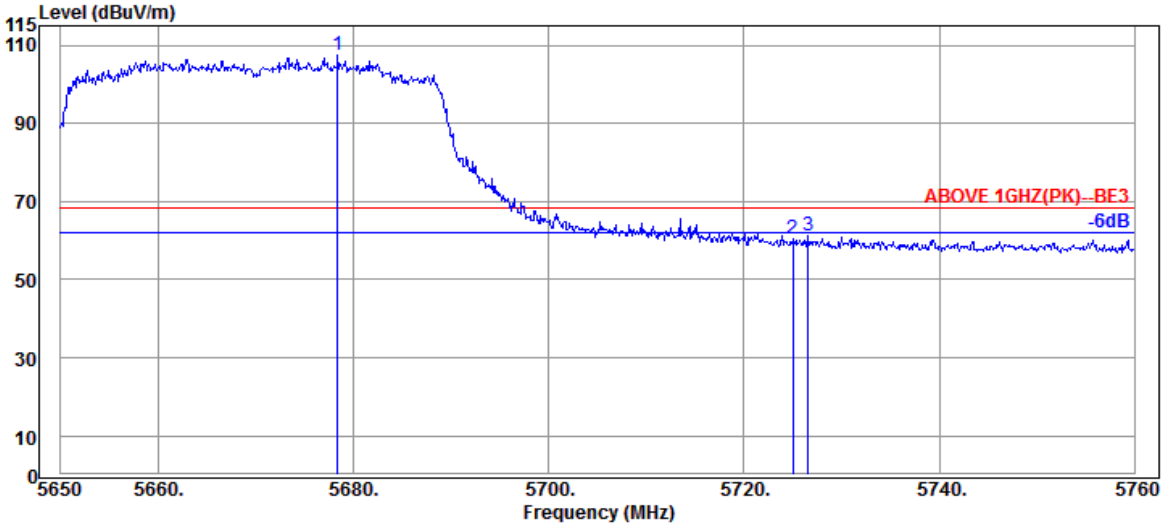


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5678.380 | 33.87 | 9.17 | 39.30 | 103.70 | 107.44 | --- | --- | Peak |
| 5725.020 | 33.80 | 9.20 | 39.30 | 56.64 | 60.34 | 68.20 | 7.86 | Peak |
| 5726.560 | 33.80 | 9.20 | 39.31 | 57.47 | 61.16 | 68.20 | 7.04 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5710MHz |

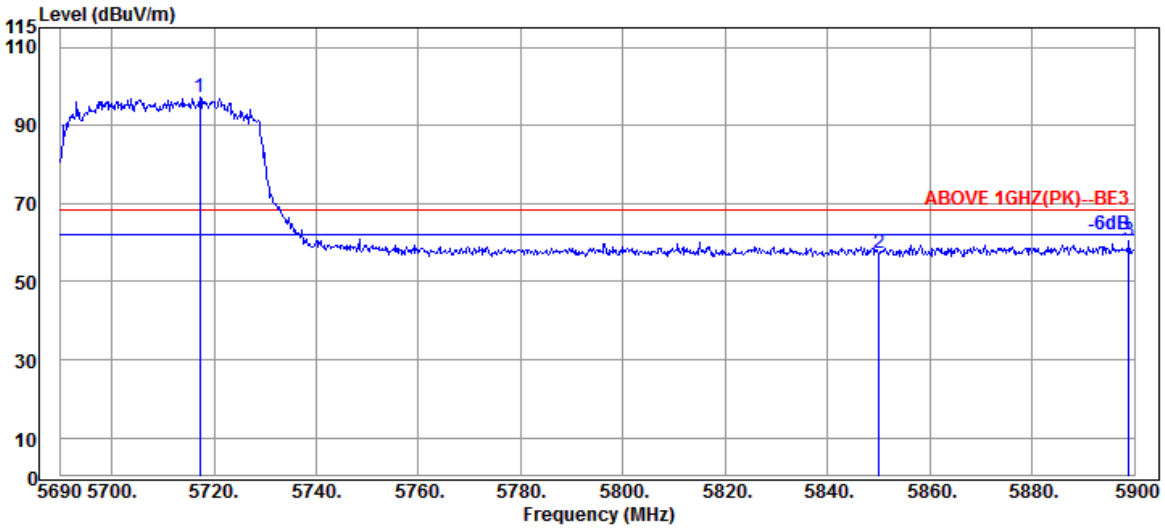


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5717.300 | 33.80 | 9.19 | 39.30 | 93.55 | 97.24 | --- | --- | Peak |
| 5850.020 | 34.10 | 9.25 | 39.33 | 53.44 | 57.46 | 68.20 | 10.74 | Peak |
| 5898.950 | 34.10 | 9.28 | 39.34 | 56.27 | 60.31 | 68.20 | 7.89 | Peak |

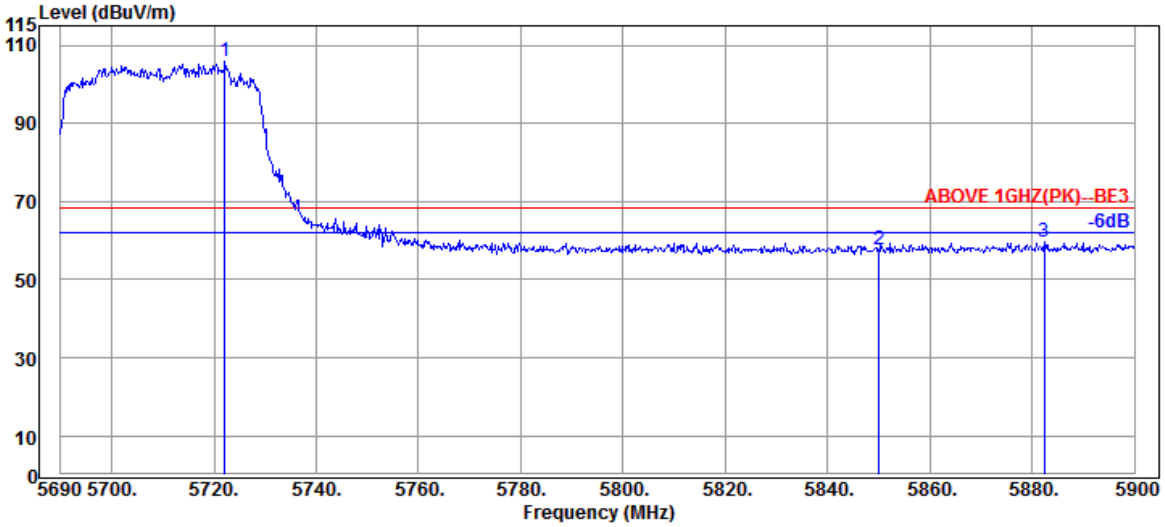


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| @ 5722.130 | 33.80 | 9.20 | 39.30 | 102.07 | 105.77 | --- | --- | Peak |
| 5850.020 | 34.10 | 9.25 | 39.33 | 53.87 | 57.89 | 68.20 | 10.31 | Peak |
| 5882.360 | 34.10 | 9.27 | 39.34 | 55.46 | 59.49 | 68.20 | 8.71 | Peak |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5710MHz |

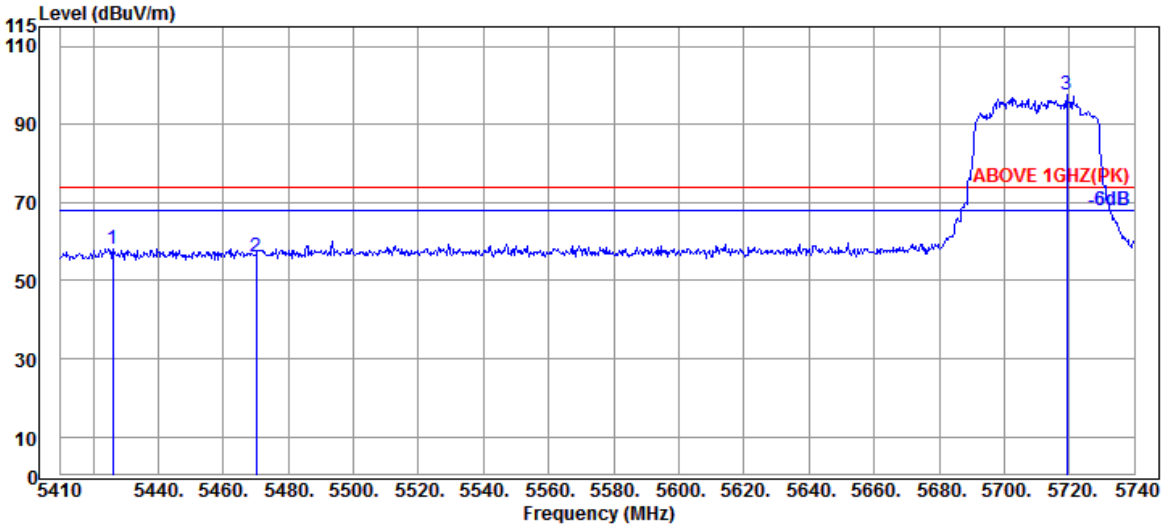


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5426.170 | 34.15 | 9.04 | 39.27 | 54.23 | 58.15 | 74.00 | 15.85 | Peak |
| 5470.060 | 34.17 | 9.06 | 39.26 | 52.07 | 56.04 | 74.00 | 17.96 | Peak |
| @ 5719.210 | 33.80 | 9.19 | 39.30 | 93.97 | 97.66 | --- | --- | Peak |

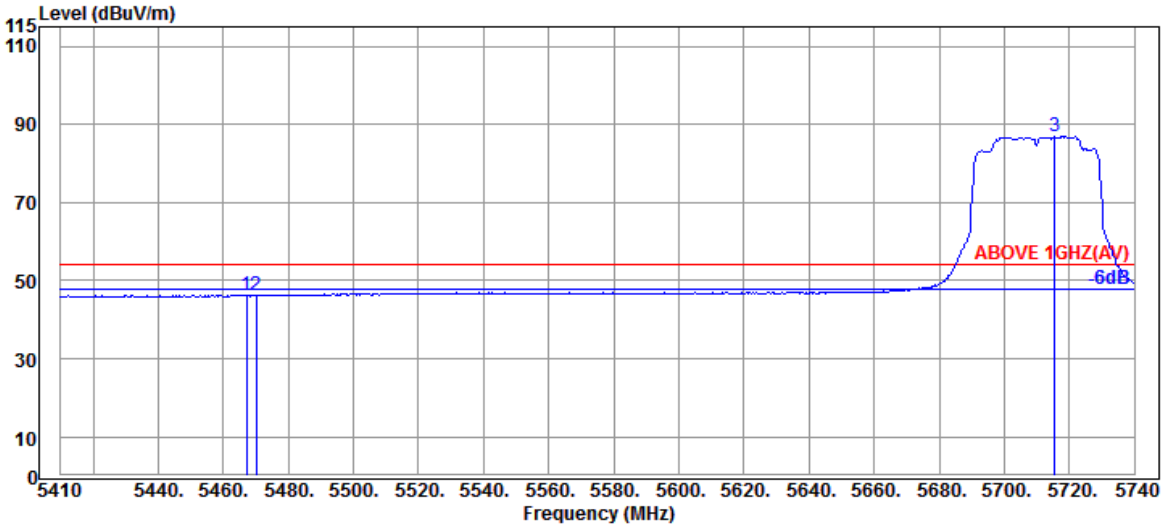


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5467.090 | 34.17 | 9.06 | 39.26 | 42.34 | 46.31 | 54.00 | 7.69 | Average |
| 5470.060 | 34.17 | 9.06 | 39.26 | 42.32 | 46.29 | 54.00 | 7.71 | Average |
| @ 5715.580 | 33.80 | 9.19 | 39.30 | 83.18 | 86.87 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*
**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 2C |
|---|---|---|---|
| | | Frequency | TX 5710MHz |

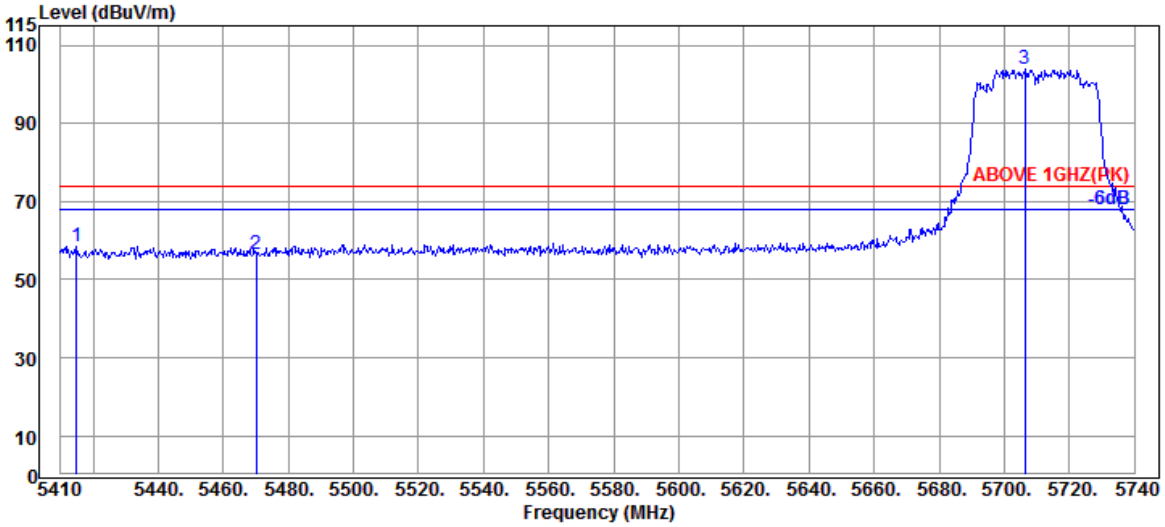


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5414.950 | 34.12 | 9.03 | 39.27 | 54.74 | 58.62 | 74.00 | 15.38 | Peak |
| 5470.060 | 34.17 | 9.06 | 39.26 | 52.58 | 56.55 | 74.00 | 17.45 | Peak |
| @ 5706.340 | 33.80 | 9.19 | 39.30 | 100.35 | 104.04 | --- | --- | Peak |

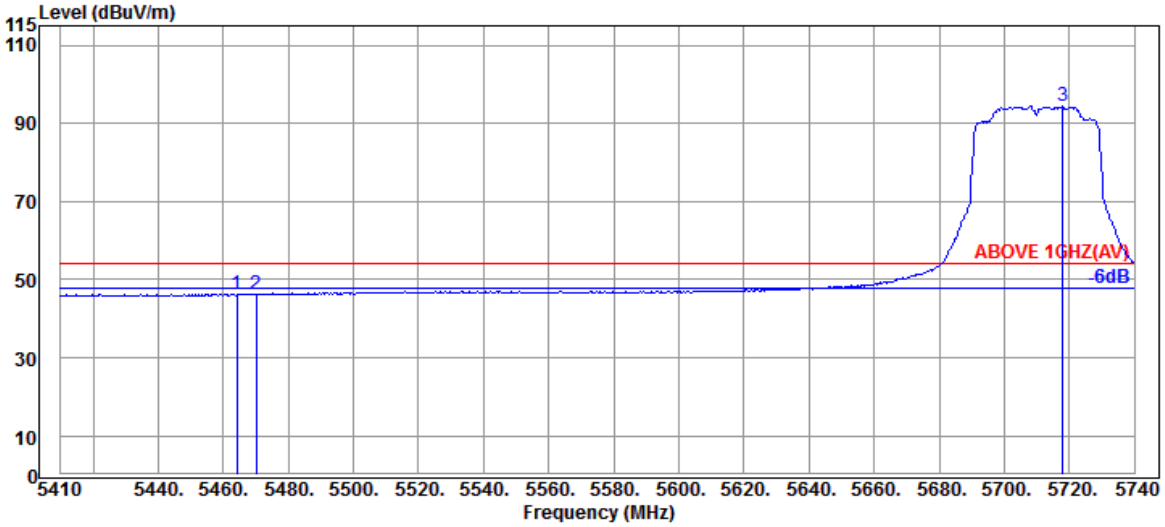


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|---|
| 5464.120 | 34.17 | 9.06 | 39.26 | 42.32 | 46.29 | 54.00 | 7.71 | Average |
| 5470.060 | 34.17 | 9.06 | 39.26 | 42.14 | 46.11 | 54.00 | 7.89 | Average |
| @ 5717.890 | 33.80 | 9.19 | 39.30 | 90.76 | 94.45 | --- | --- | Average |

Remark: The "@" means fundamental frequency, it is ignored in this section.



***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5755MHz |

Antenna at Horizontal Polarization

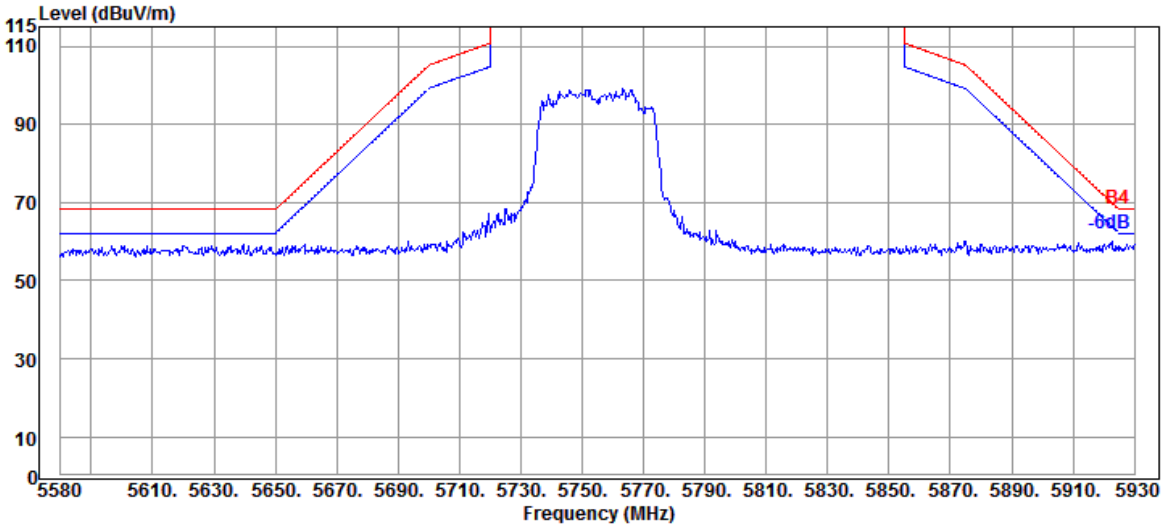


Antenna at Vertical Polarization

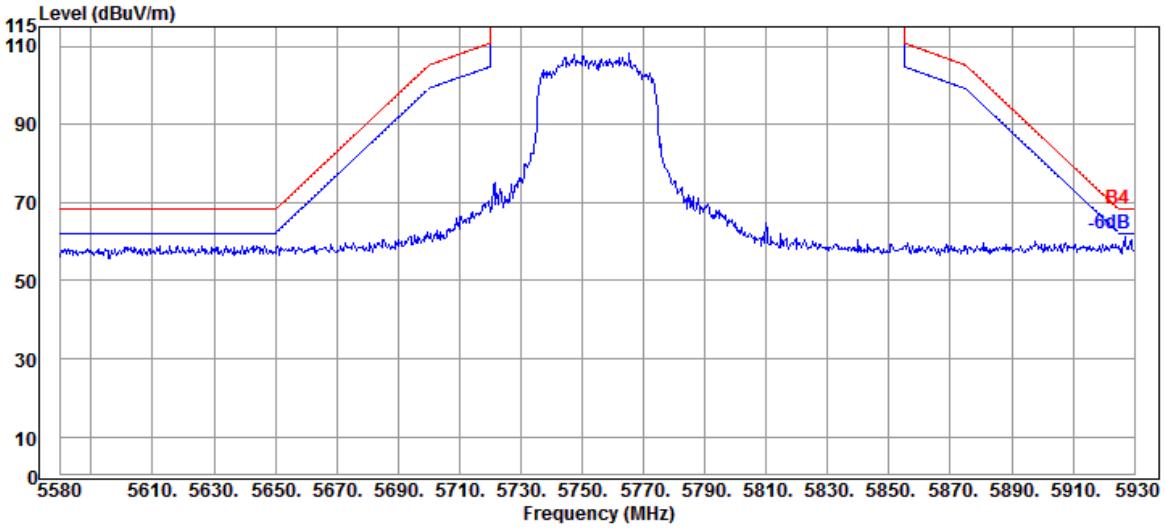




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***

**Audix Technology Corp.**
*No. 491, Zhongfu Rd., Linkou Dist.,*
*New Taipei City244, Taiwan*

**Tel: +886 2 26099301**
**Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | U-NII Band | 3 |
|---|---|---|---|
| | | Frequency | TX 5795MHz |

Antenna at Horizontal Polarization

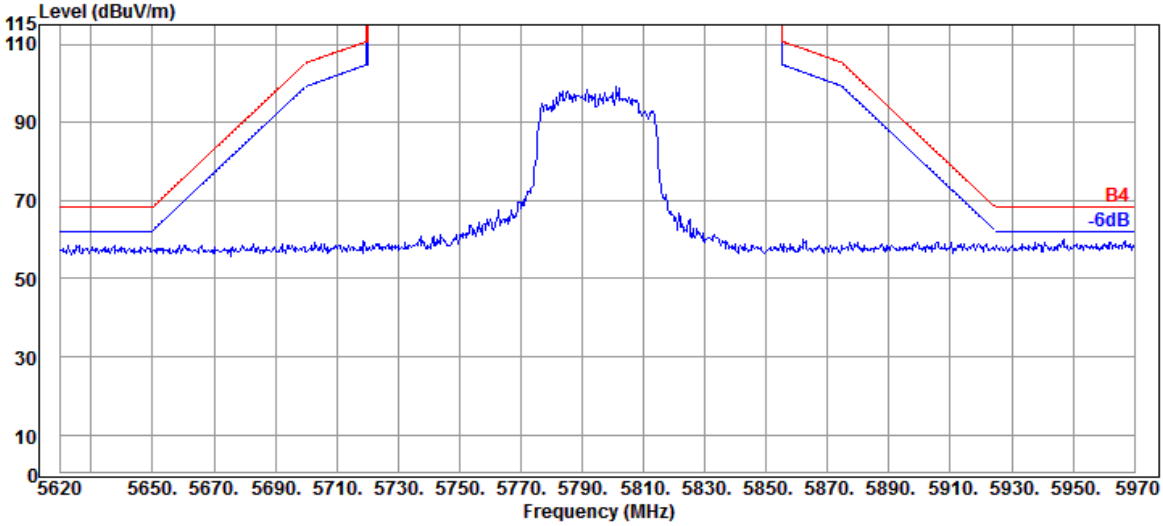


Antenna at Vertical Polarization

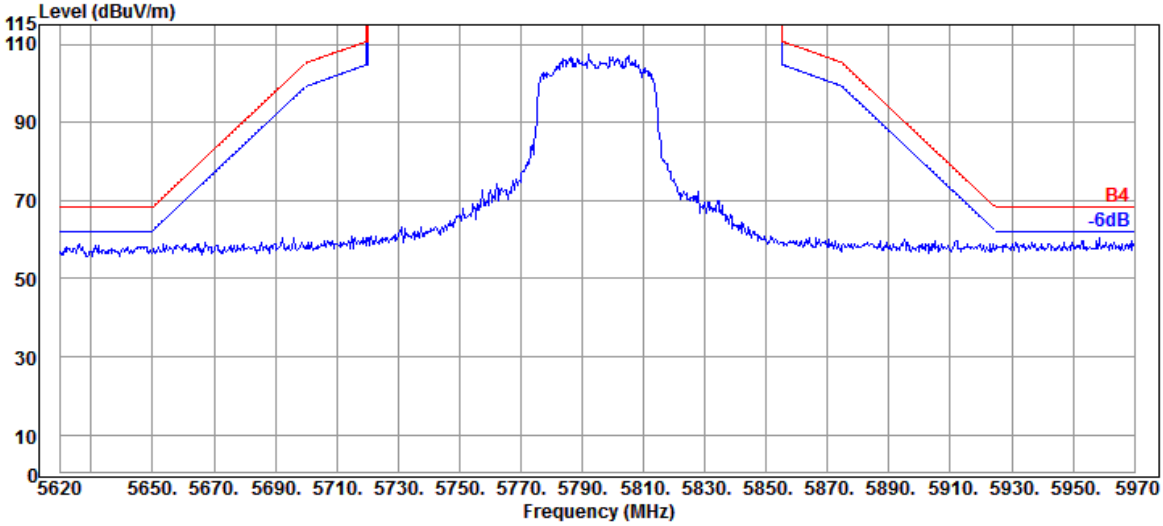




***This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.***