Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 POWER SPECTRAL DENSITY

Test Date	2022/07/20 ~ 21	Temp./Hum.	24 ~ 25℃/49 ~ 50%
Cable Loss	1.0dB	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.4.1 Power Spectral Density Result

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Max. Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11a	1	5180	8.139	8.133	0.110	8.249	11 dBm/MHz
		5200	7.937	7.878		8.047	
		5240	7.739	7.547		7.849	
	2A	5260	7.861	7.694		7.971	
		5300	7.632	7.696		7.806	
		5320	7.615	7.590		7.725	
	2C	5500	8.194	8.174		8.304	
		5580	7.929	7.519		8.039	
		5700	7.624	7.475		7.734	
		5720	7.726	7.651		7.836	

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Max. Power Spectral Density (dBm/500kHz) Note 4	Limit
			AUX	Main			
802.11a	3[Note2]	5745	5.367	5.597	0.110	5.707	30dBm/500 kHz
		5785	5.622	5.928		6.038	
		5825	5.911	5.658		6.021	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11n-HT20	1	5180	6.359	5.970	N/A	9.179	11 dBm/MHz
		5200	7.288	6.806		10.064	
		5240	6.758	6.525		9.653	
	2A	5260	6.884	6.653		9.780	
		5300	6.771	6.607		9.700	
		5320	6.286	6.001		9.156	
	2C	5500	7.384	7.323		10.364	
		5580	7.174	6.594		9.904	
		5700	6.035	6.125		9.091	
		5720	7.262	7.226		10.254	

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/500kHz) Note 4	Limit
			AUX	Main			
802.11n-HT20	3 Note2	5745	5.007	5.200	N/A	8.115	30dBm/500 kHz
		5785	5.475	5.144		8.323	
		5825	6.047	5.601		8.840	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11n-HT40	1	5190	1.807	1.476	0.123	4.778	11 dBm/MHz
		5230	4.671	4.086		7.522	
	2A	5270	4.233	4.045		7.273	
		5310	0.852	0.673		3.897	
	2C	5510	3.403	3.167		6.420	
		5550	4.581	4.314		7.583	
		5670	4.556	3.815		7.335	
		5710	3.248	2.973		6.246	

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/500kHz) Note 4	Limit
			AUX	Main			
802.11n-HT40	3[Note2]	5755	3.652	3.413	0.123	6.667	30dBm/500 kHz
		5795	2.389	2.368		5.512	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11ac-VHT80	1	5210	-2.419	-2.662	N/A	0.471	11 dBm/MHz
	2A	5290	-2.242	-2.272		0.753	
	2C	5530	-1.433	-1.745		1.424	
		5610	1.182	1.068		4.136	
		5690	1.157	1.249		4.214	

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/500kHz) Note 4	Limit
			AUX	Main			
802.11ac-VHT80	3 Note2	5775	-1.227	-1.288	N/A	1.753	30dBm/500 kHz

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11ac-VHT160	1/2A	5250	-7.888	-8.057	0.097	-4.864	11 dBm/MHz
	2C	5570	-4.668	-4.873		-1.662	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11ax-HE20	1	5180	6.513	5.900	N/A	9.228	11 dBm/MHz
		5200	7.302	6.872		10.103	
		5240	7.011	6.803		9.919	
	2A	5260	6.749	6.502		9.638	
		5300	6.799	6.786		9.803	
		5320	6.216	5.993		9.116	
	2C	5500	7.284	7.388		10.347	
		5580	7.049	6.910		9.990	
		5700	6.486	6.102		9.309	
		5720	7.275	7.282		10.289	

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/500kHz) Note 4	Limit
			AUX	Main			
802.11ax-HE20	3 Note2	5745	4.031	4.005	N/A	7.028	30dBm/500 kHz
		5785	4.506	4.491		7.509	
		5825	4.661	4.590		7.636	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11ax-HE40	1	5190	1.411	1.201	N/A	4.318	11 dBm/MHz
		5230	4.548	3.974		7.281	
	2A	5270	3.882	3.825		6.864	
		5310	0.369	0.194		3.293	
	2C	5510	2.857	2.805		5.841	
		5550	4.185	3.816		7.015	
		5670	4.318	3.364		6.877	
		5710	2.970	2.438		5.722	

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/500kHz) Note 4	Limit
			AUX	Main			
802.11ax-HE40	3[Note2]	5755	1.175	0.435	N/A	3.831	30dBm/500 kHz
		5795	1.270	1.314		4.302	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11ax-HE80	1	5210	-2.740	-2.767	N/A	0.257	11 dBm/MHz
	2A	5290	-2.262	-2.467		0.647	
	2C	5530	-1.817	-1.777		1.213	
		5610	1.032	0.585		3.825	
		5690	0.983	0.786		3.896	

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/500kHz) Note 4	Limit
			AUX	Main			
802.11ax-HE80	3 Note2	5775	-2.095	-1.970	N/A	0.978	30dBm/500 kHz

Mode	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm/1MHz) Note 3	Limit
			AUX	Main			
802.11ax-HE160	1/2A	5250	-8.208	-8.192	0.097	-5.093	11 dBm/MHz
	2C	5570	-4.922	-5.063		-1.885	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm) Note 3	Limit
				AUX	Main			
802.11ax-HE20	1	5180	26/0	7.031	6.568	0.150	9.966	11 dBm/MHz
			52/37	7.346	7.432		10.550	
			106/53	7.770	7.362		10.731	
	2A	5320	26/8	6.930	6.392		9.830	
			52/40	7.447	7.303		10.536	
			106/54	6.968	6.623		9.959	
	2C	5500	26/0	7.013	7.080		10.207	
			52/37	7.483	7.337		10.571	
			106/53	7.051	6.652		10.016	
		5700	26/8	6.525	6.330		9.589	
			52/40	7.358	7.122		10.402	
			106/54	7.254	6.927		10.254	

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm) Note 4	Limit
				AUX	Main			
802.11ax-HE20	3 Note2	5745	26/0	9.522	9.906	0.150	12.879	30dBm/500 kHz
			52/37	4.612	4.623		7.778	
			106/53	6.255	5.874		9.229	
		5825	26/8	10.277	9.803		13.207	
			52/40	4.770	4.567		7.830	
			106/54	5.729	5.549		8.800	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan
Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm) Note 3	Limit
				AUX	Main			
802.11ax-HE40	1	5190	242/61	6.356	5.915	N/A	9.151	11 dBm/MHz
	2A	5310	242/62	4.797	4.606		7.713	
	2C	5510	242/61	7.530	7.017		9.320	
		5670	242/62	6.914	6.481		9.713	

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm) Note 4	Limit
				AUX	Main			
802.11ax-HE40	3 Note2	5755	242/61	5.956	3.986	N/A	8.092	30dBm/500 kHz
		5795	242/62	6.082	4.734		8.470	

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm) Note 3	Limit
				AUX	Main			
802.11ax-HE80	1	5210	484/65	1.698	1.107	N/A	4.423	11 dBm/MHz
	2A	5290	484/66	-2.217	4.802		5.589	
	2C	5530	484/65	4.707	1.222		6.315	
		5610	484/66	4.353	3.529		6.971	

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm) Note 4	Limit
				AUX	Main			
802.11ax-HE80	3 Note2	5775	484/65	1.260	0.824	N/A	4.058	30dBm/500 kHz
		5775	484/66	1.664	0.957		4.335	

Mode	U-NII Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm/1MHz)		Duty Cycle Factor 10log(1/X)	Total Power Spectral Density (dBm) Note 3	Limit
				AUX	Main			
802.11ax-HE160	1/2A	5250	996/67	-2.620	-2.814	N/A	0.294	11 dBm/MHz
			996/S67	-4.287	-4.458		-1.361	
	2C	5570	996/67	-2.611	-2.830		0.291	
			996/S67	1.241	1.128		4.195	

Note :1. All results have been included cable loss.
2. BWCF 7dB (100kHz converted to 500kHz) has been included in the test result.
3. Max. Power Spectral Density (dBm/1MHz) = Max of each PSD (dBm/1MHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.
4. Max. Power Spectral Density (dBm/500kHz) = Max of each PSD (dBm/500kHz) + Duty Cycle Factor(dB) when duty cycle is less than 98%.

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4.2 Measurement Plots

Mode: 802.11a	
AUX	Main
U-NII Band 1	U-NII Band 1
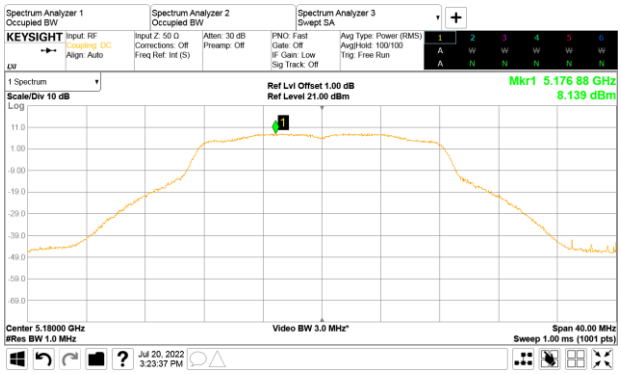	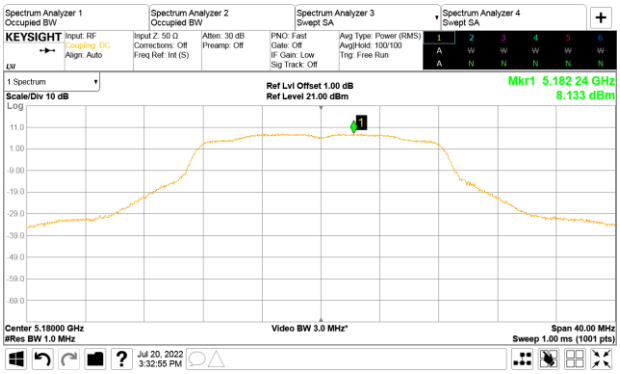
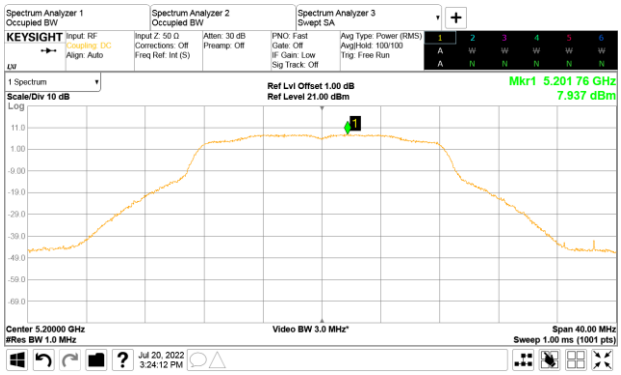	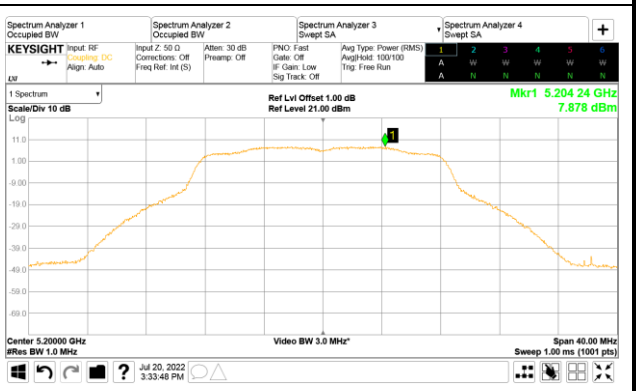
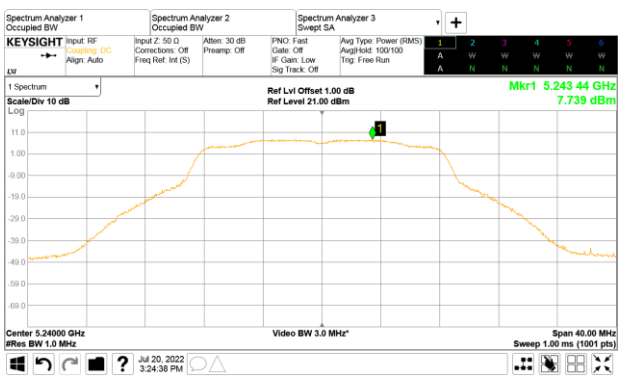	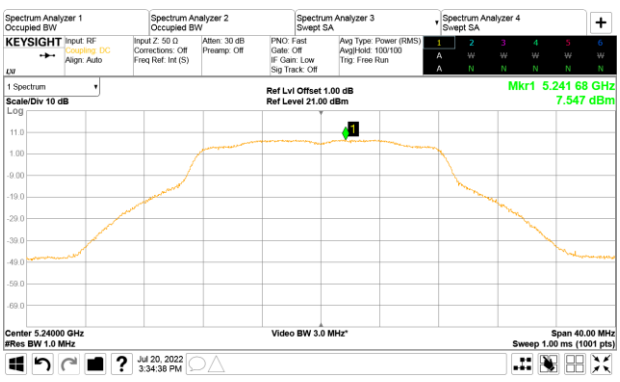

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11a	
AUX	Main
U-NII Band 2A	U-NII Band 2A
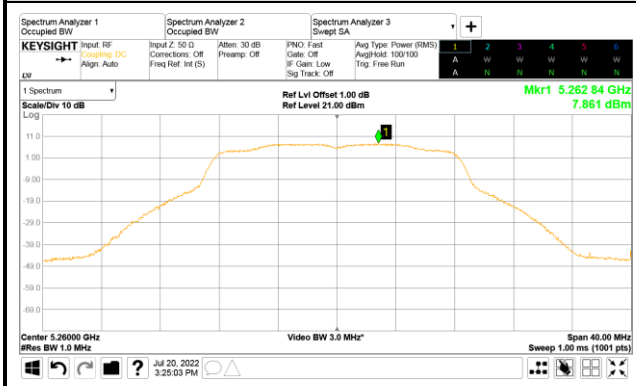	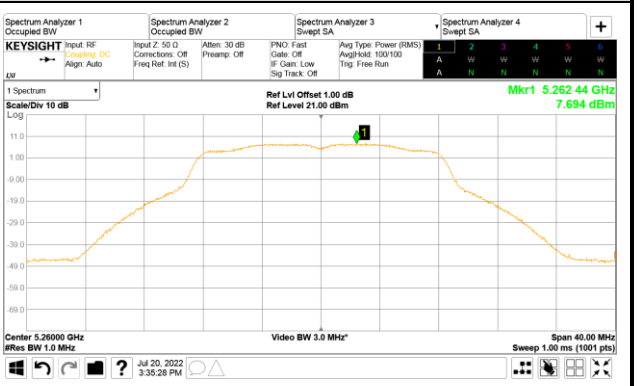
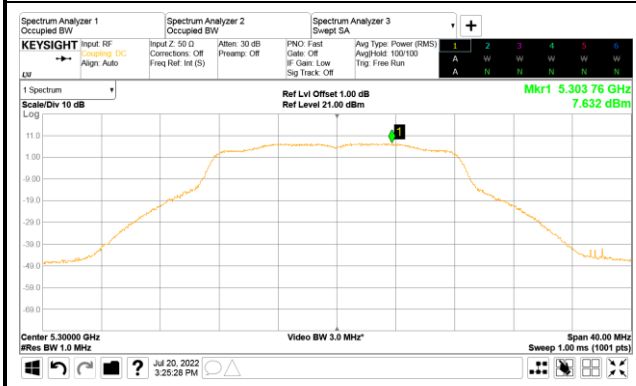	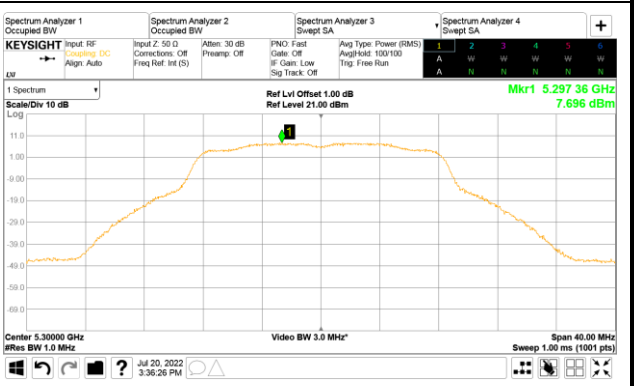
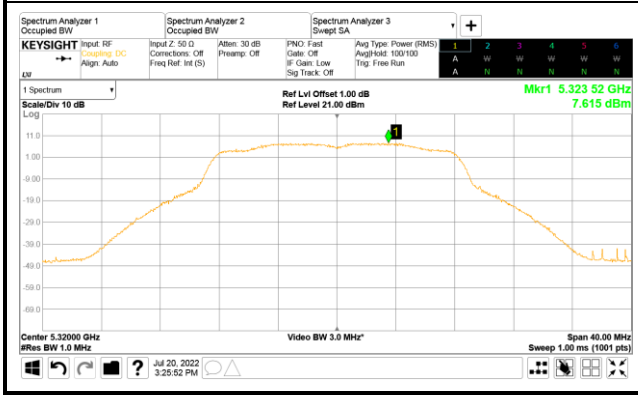	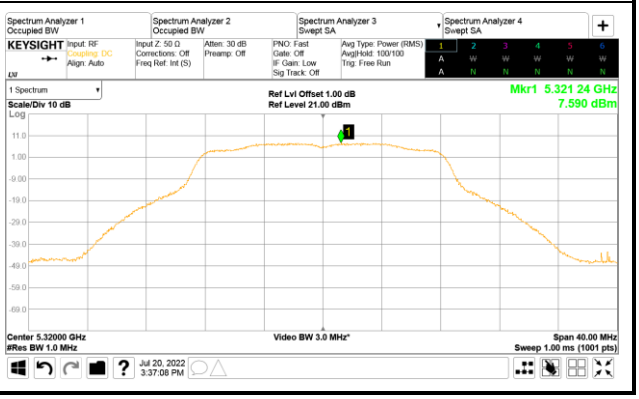

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11a	
AUX	Main
U-NII Band 2C	U-NII Band 2C
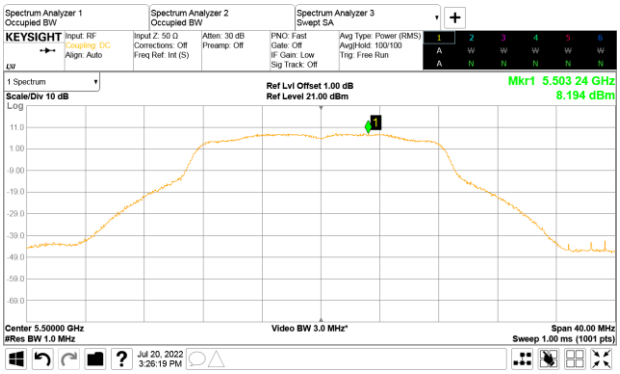	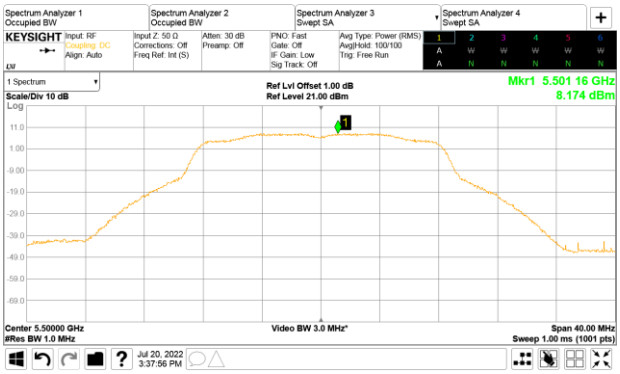
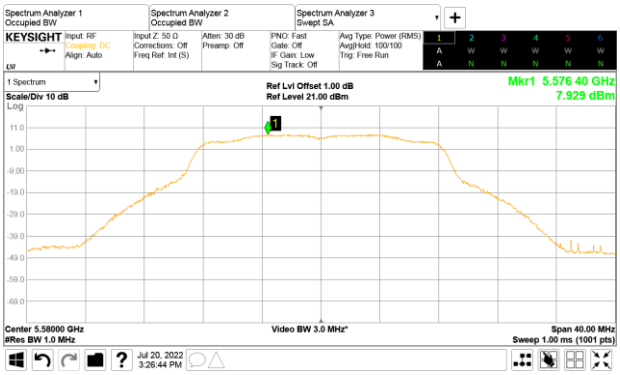	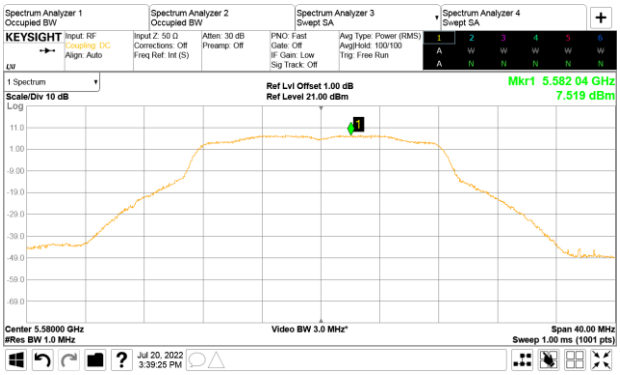
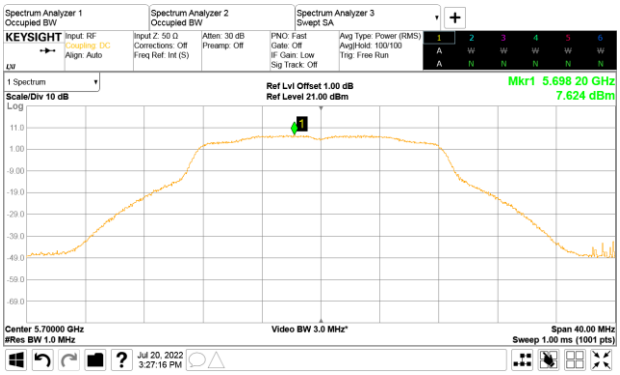	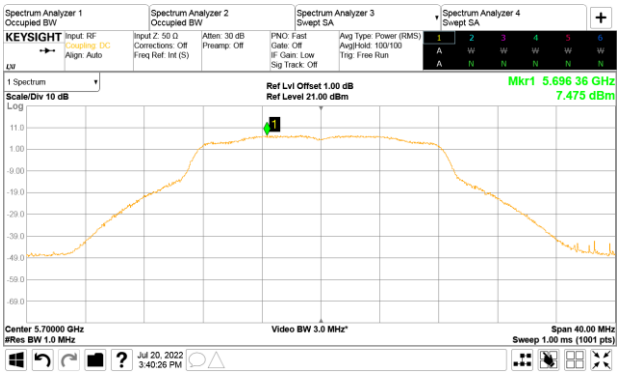
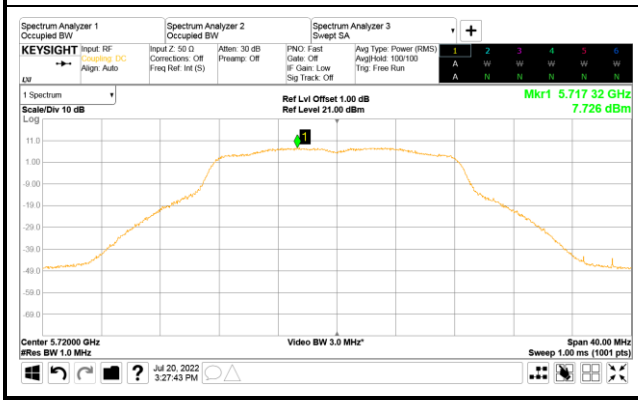	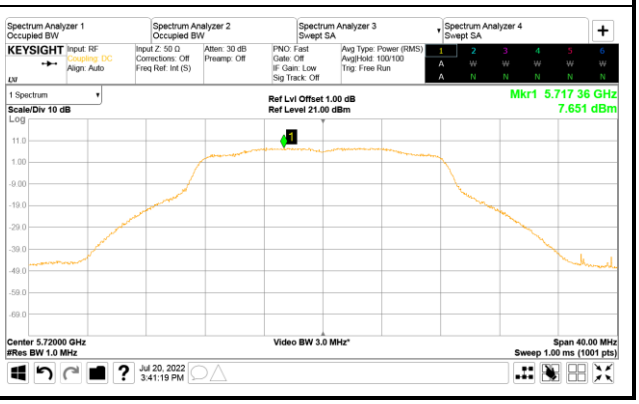

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11a	
AUX	Main
U-NII Band 3	U-NII Band 3
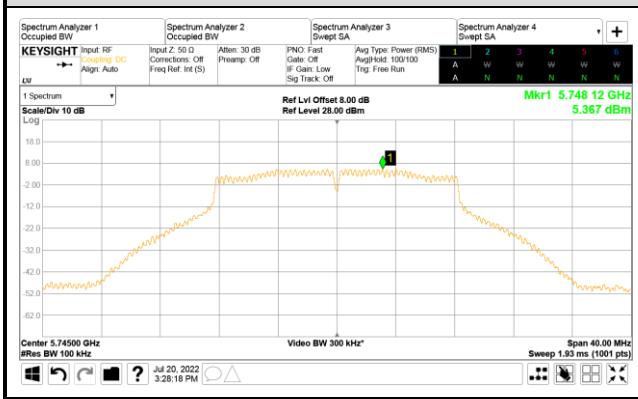	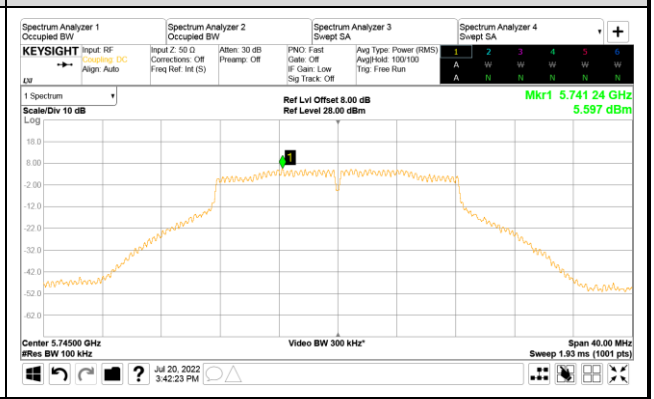
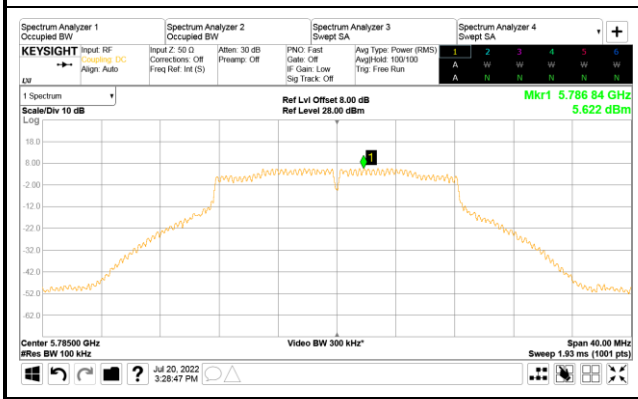	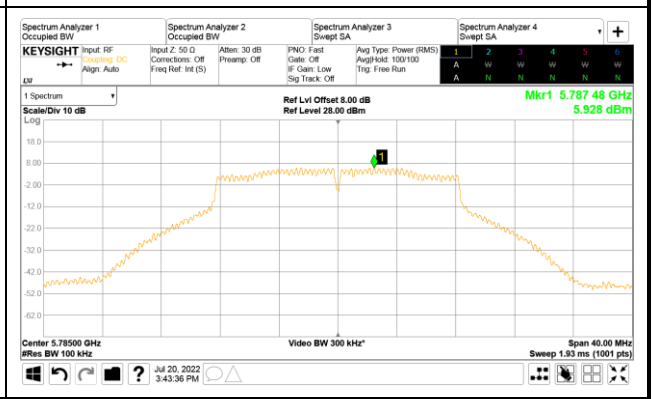
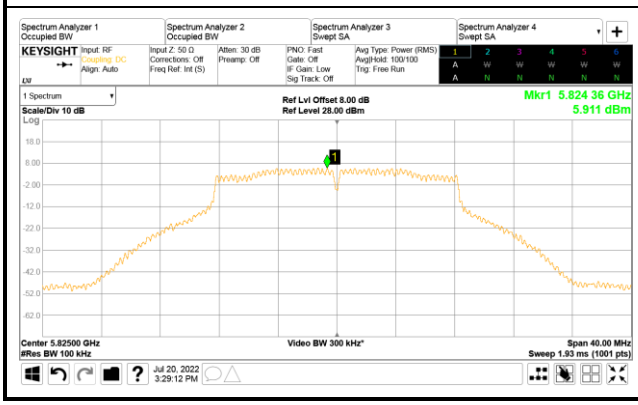	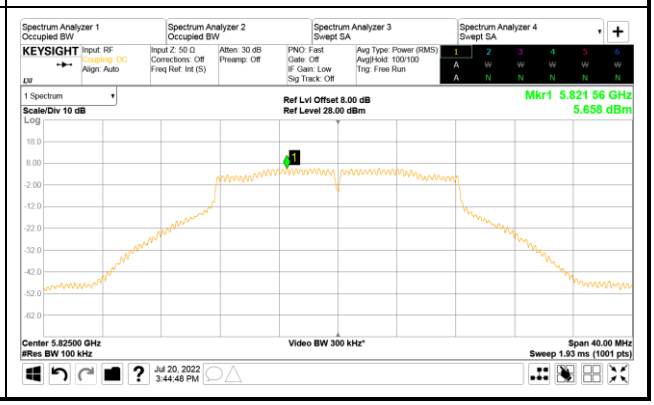

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11n-HT20	
AUX	Main
U-NII Band I	U-NII Band I
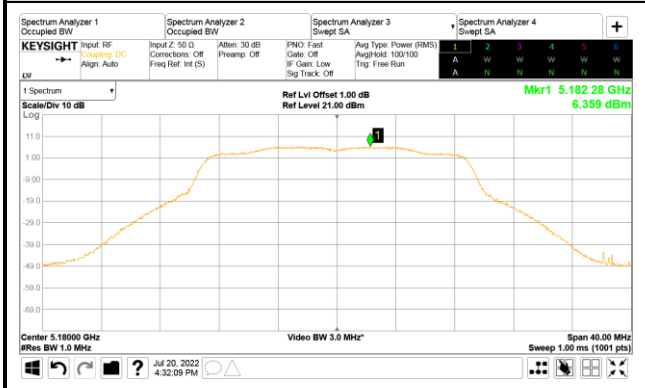	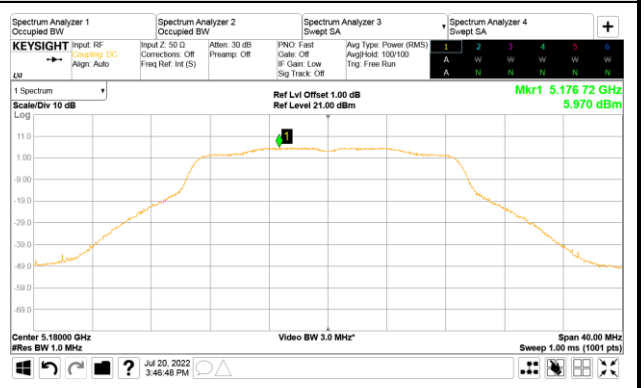
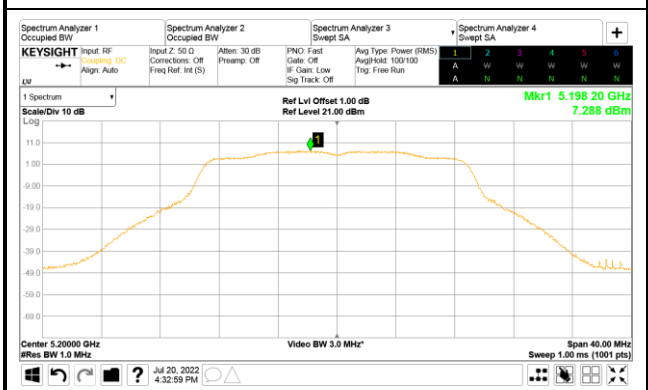	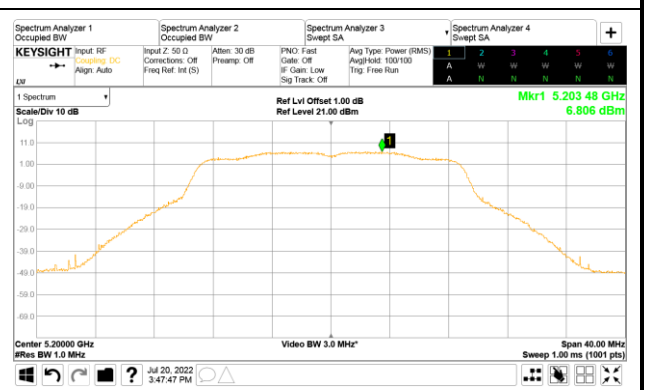
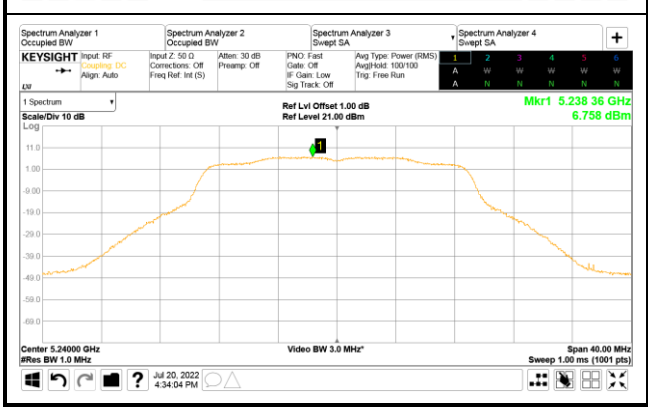	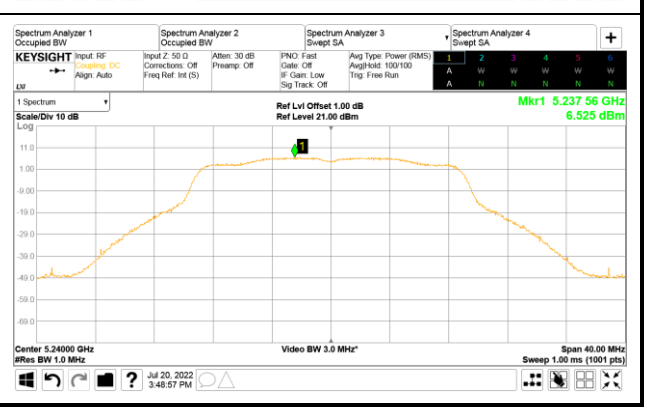

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11n-HT20	
AUX	Main
U-NII Band 2A	U-NII Band 2A
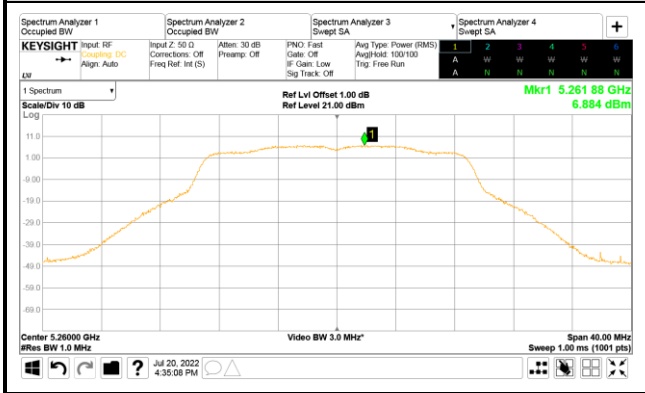	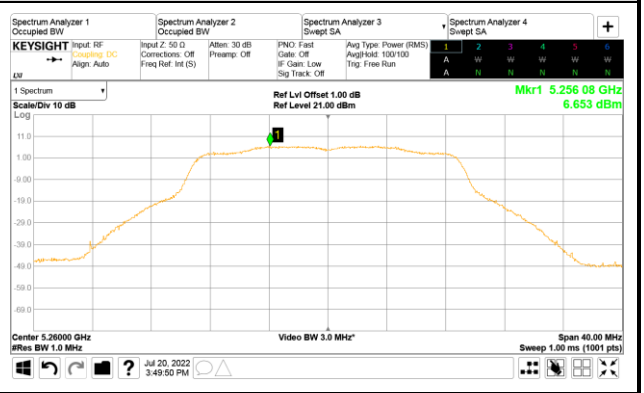
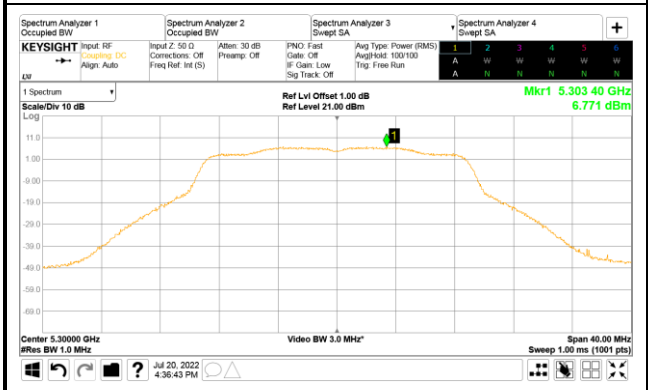	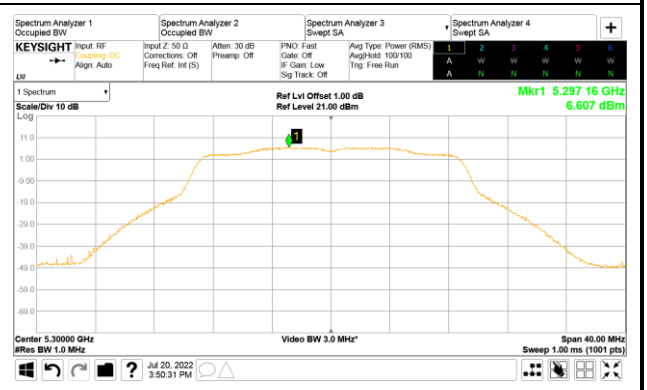
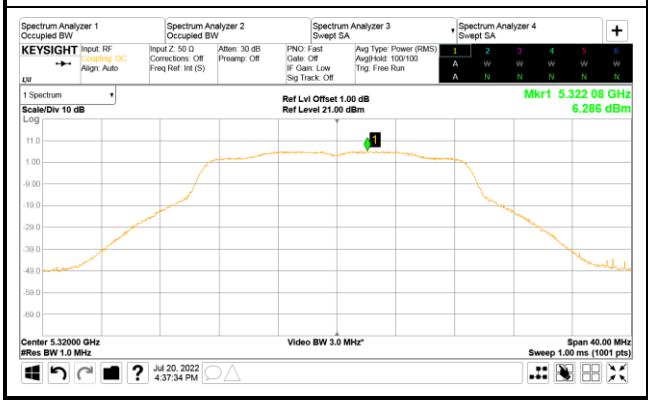	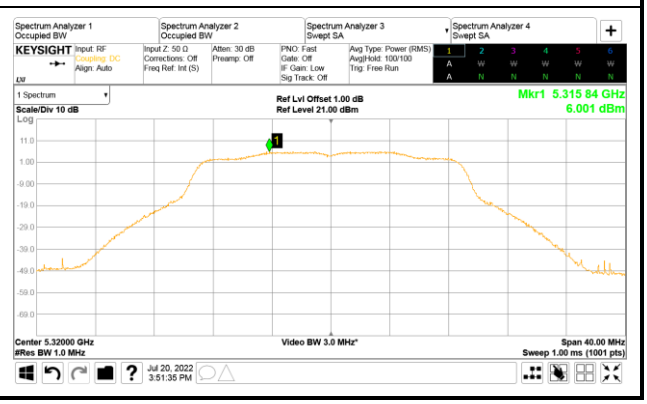

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11n-HT20	
AUX	Main
U-NII Band 2C	U-NII Band 2C
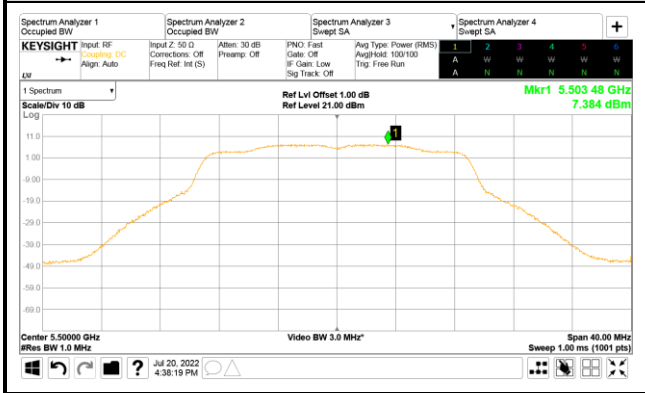	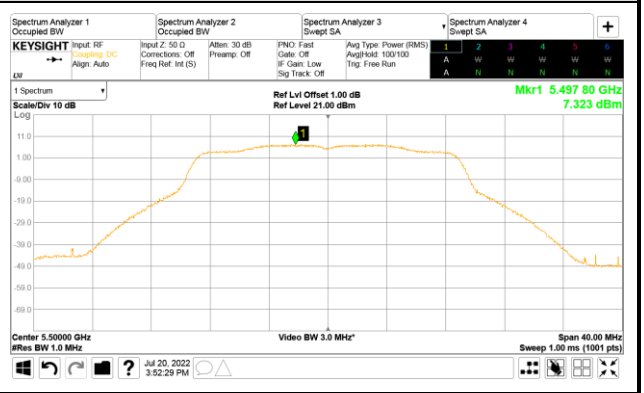
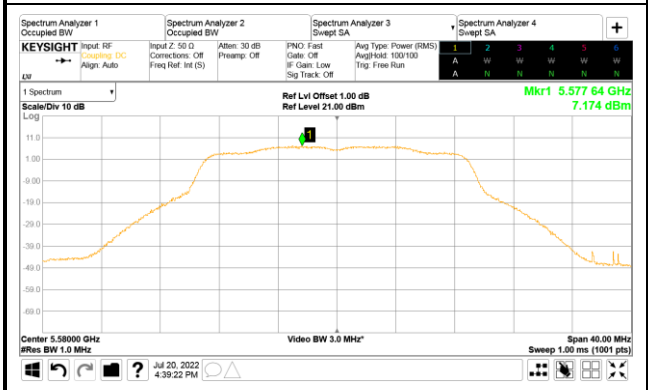	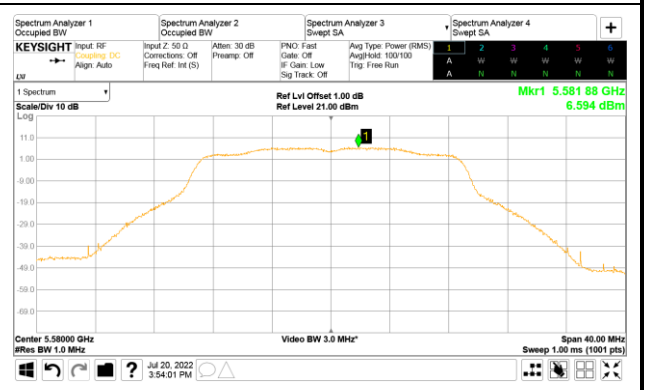
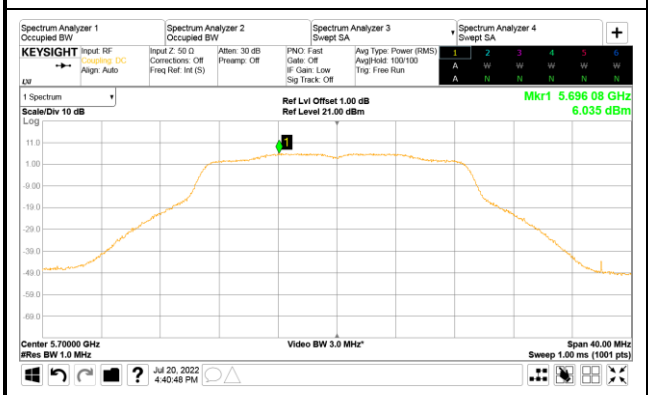	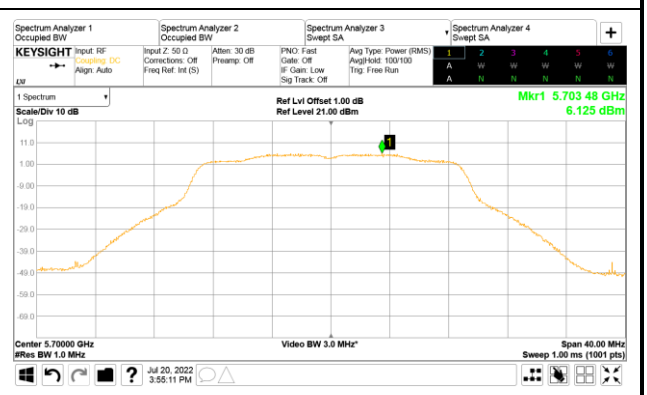
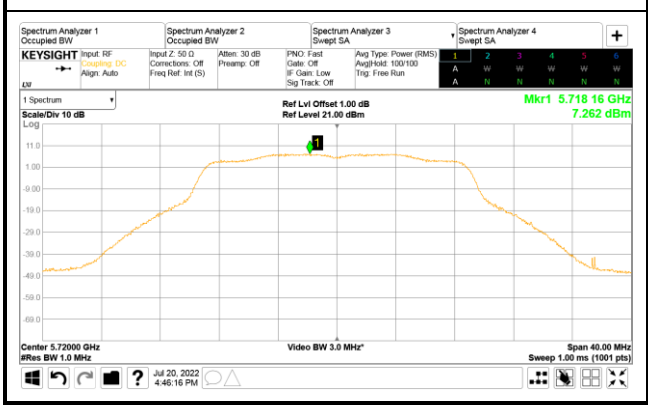	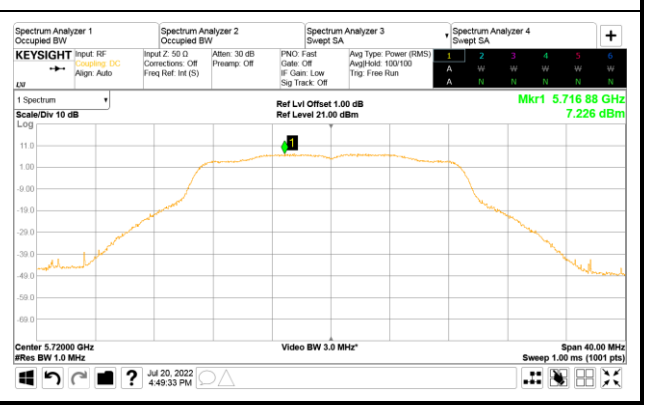

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11n-HT20	
AUX	Main
U-NII Band 3	U-NII Band 3
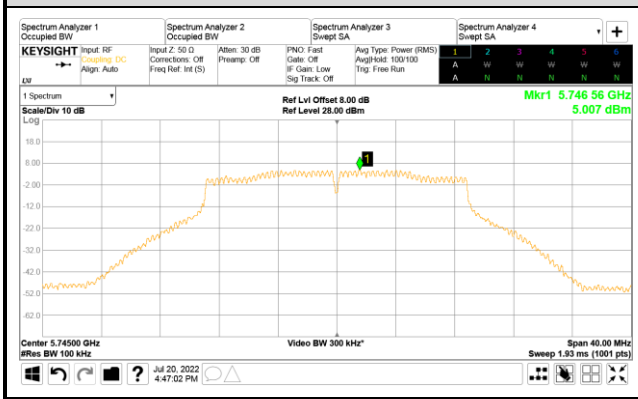	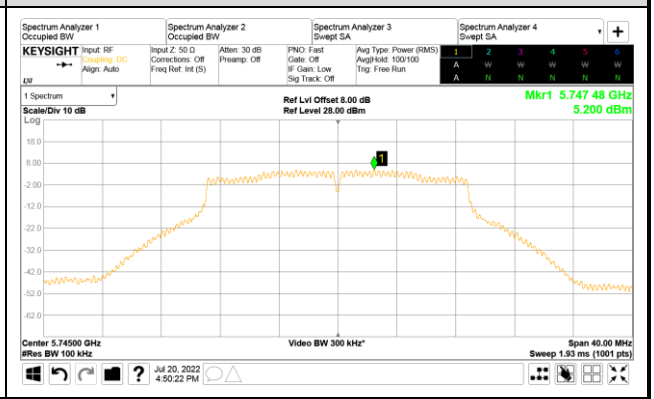
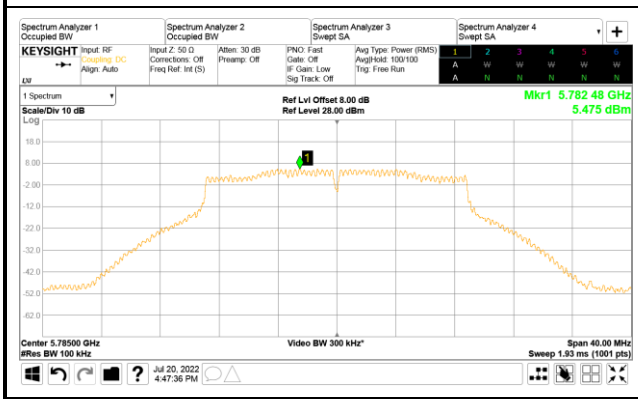	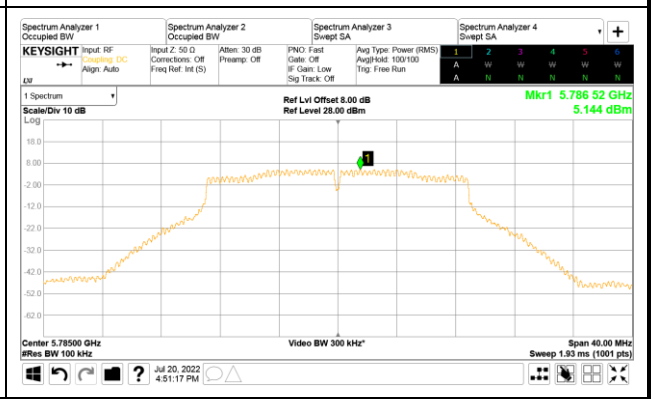
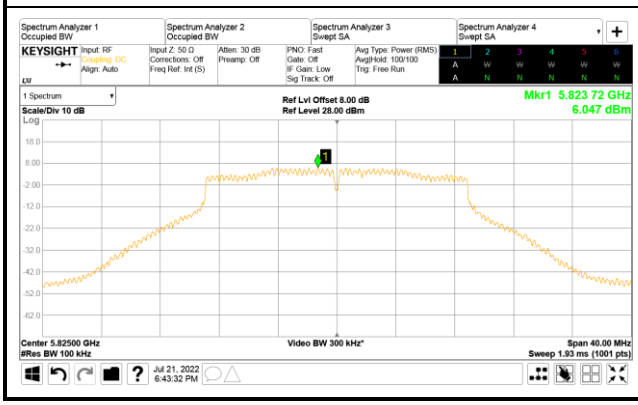	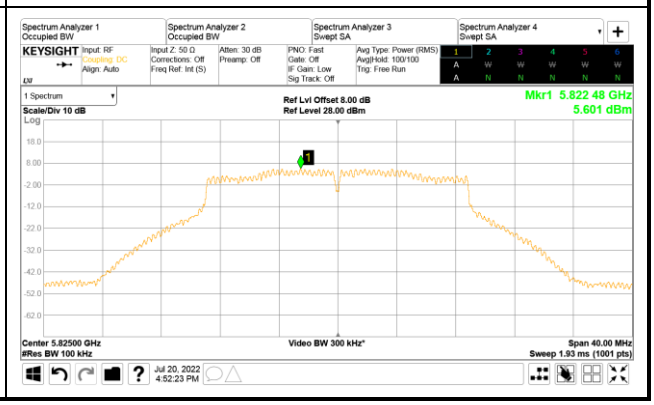

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11n-HT40	
AUX	Main
U-NII Band 1	U-NII Band 1
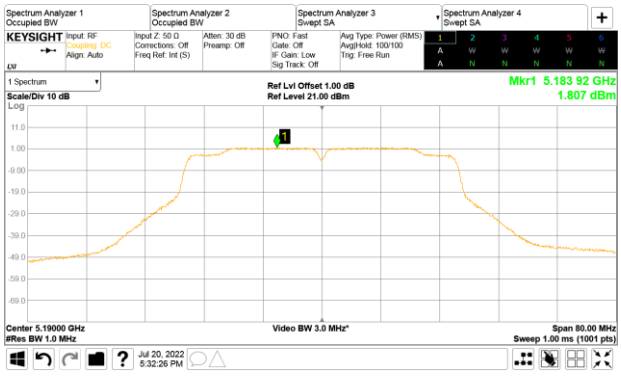	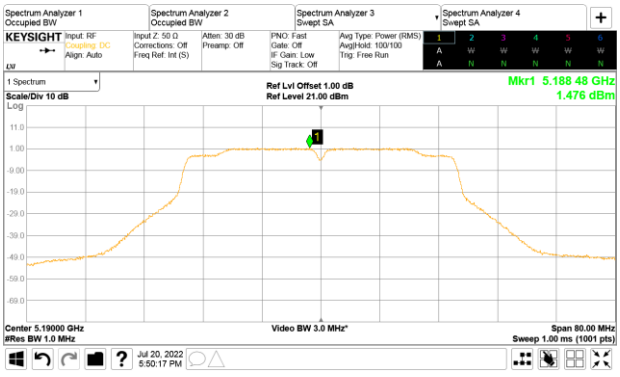
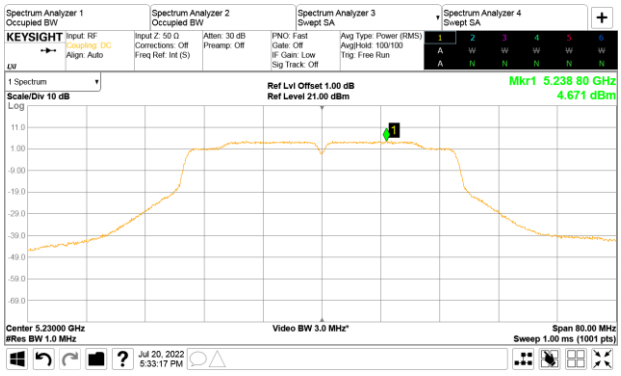	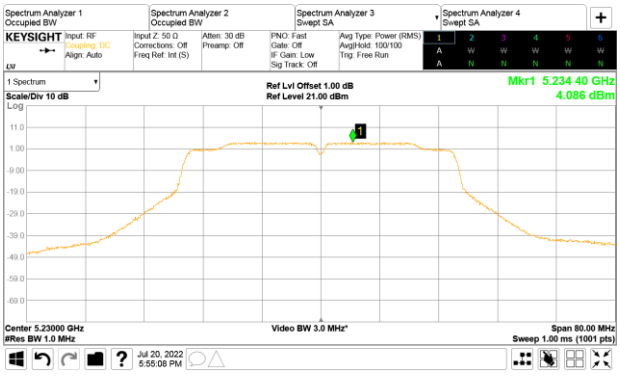

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11n-HT40	
AUX	Main
U-NII Band 2A	U-NII Band 2A
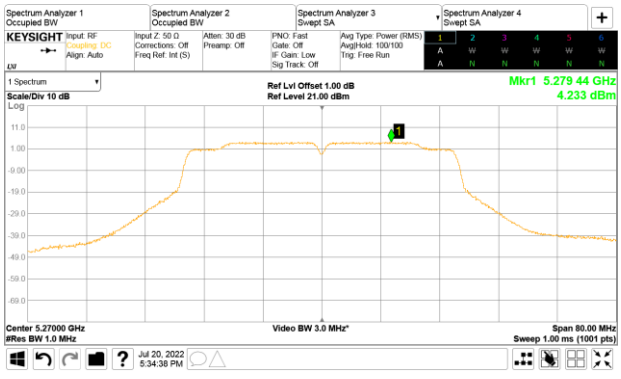	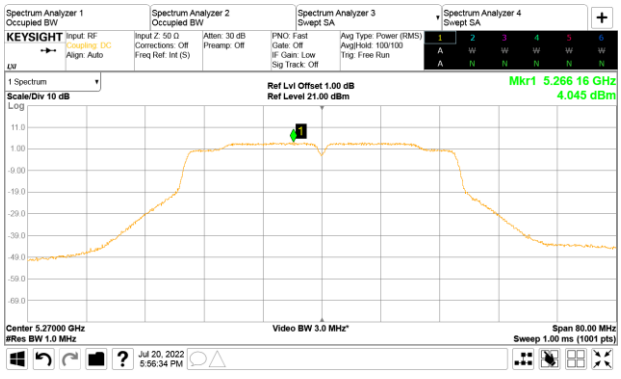
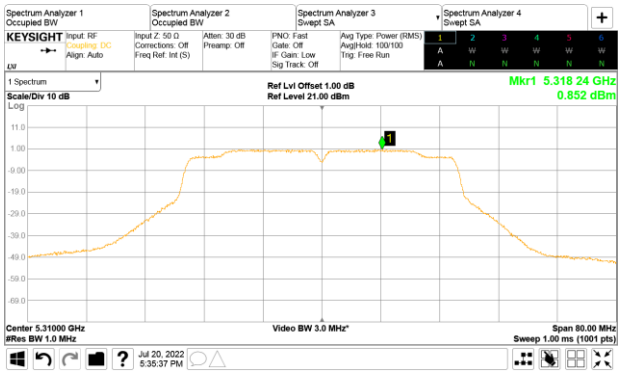	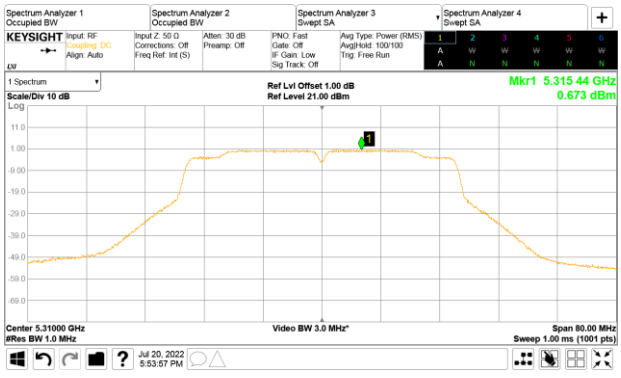

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11n-HT40	
AUX	Main
U-NII Band 2C	U-NII Band 2C
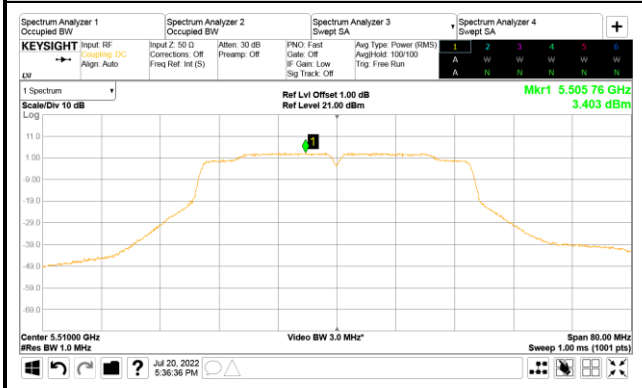	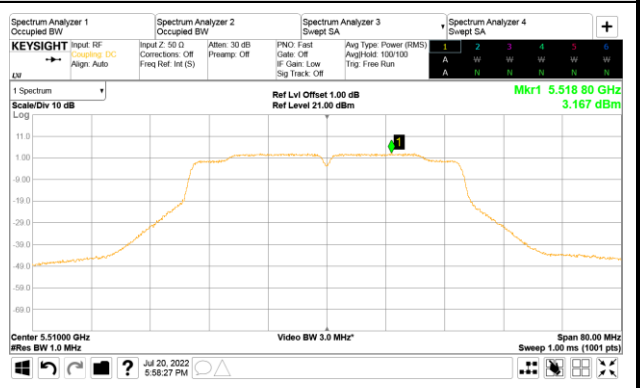
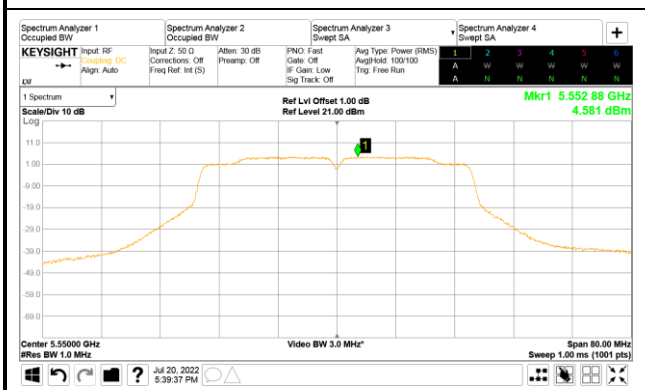	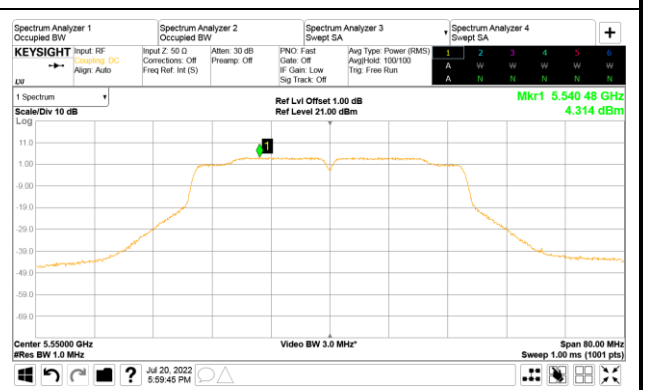
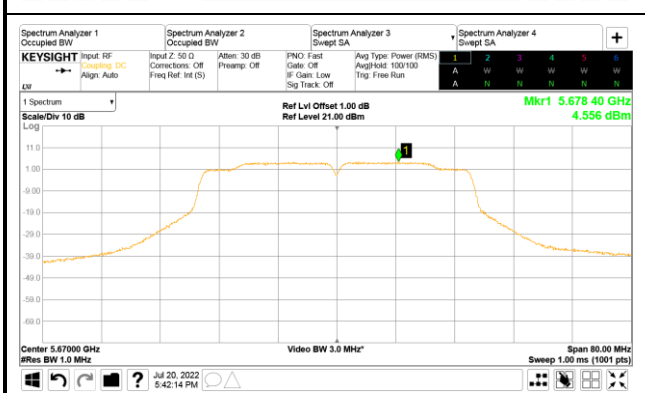	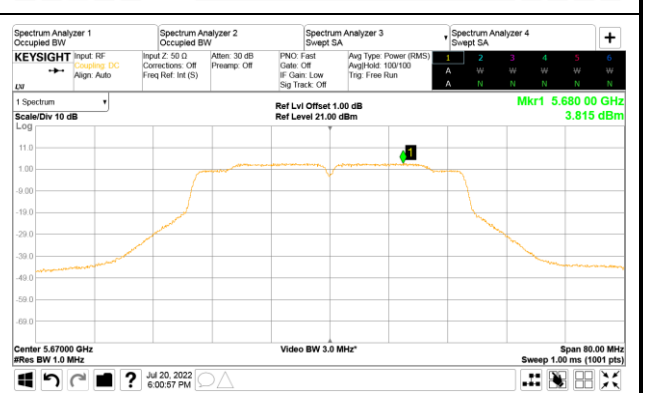
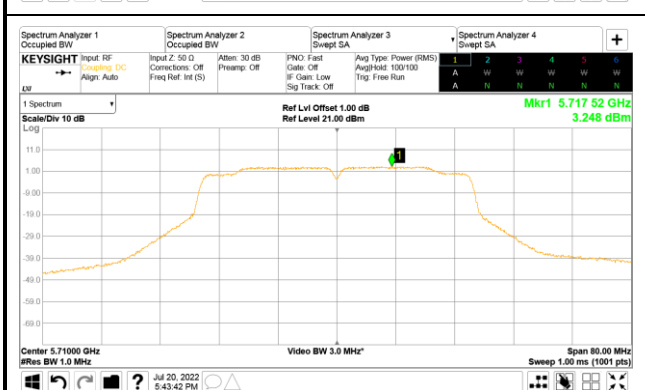	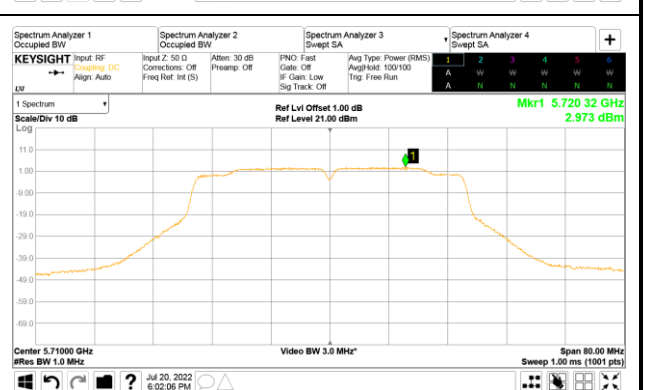

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11n-HT40	
AUX	Main
U-NII Band 3	U-NII Band 3
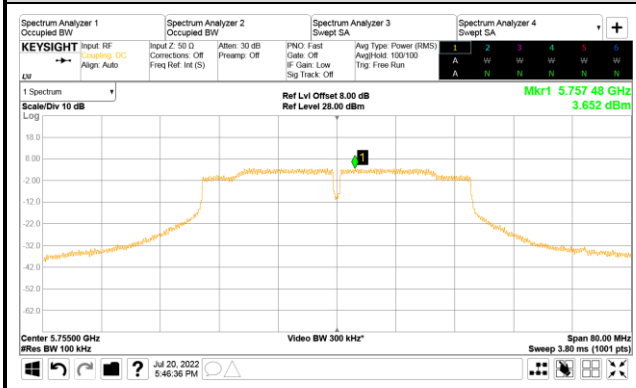	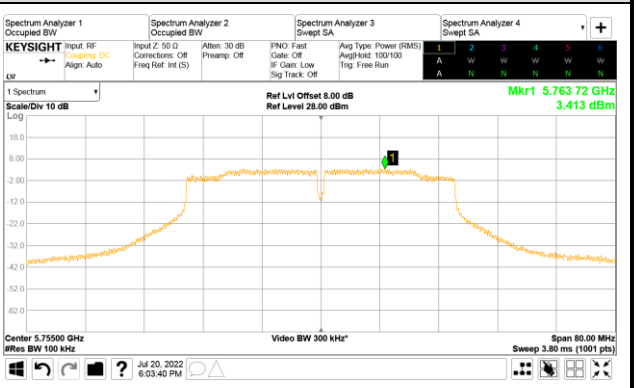
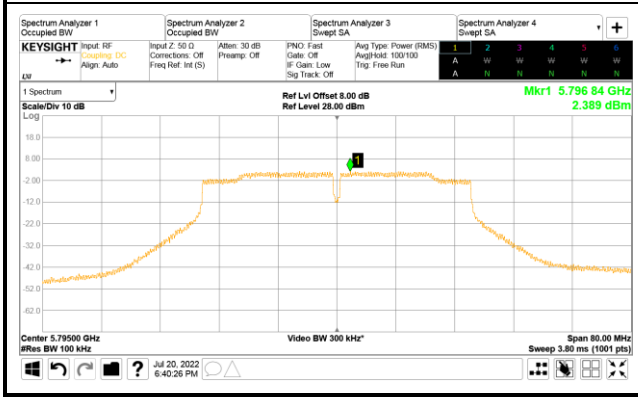	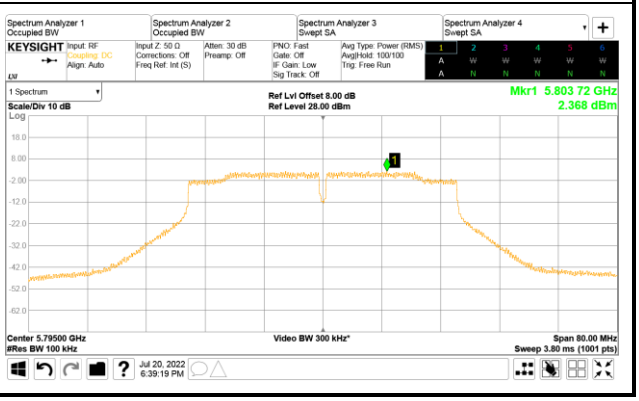

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11ac-VHT80	
AUX	Main
U-NII Band 1	U-NII Band 1
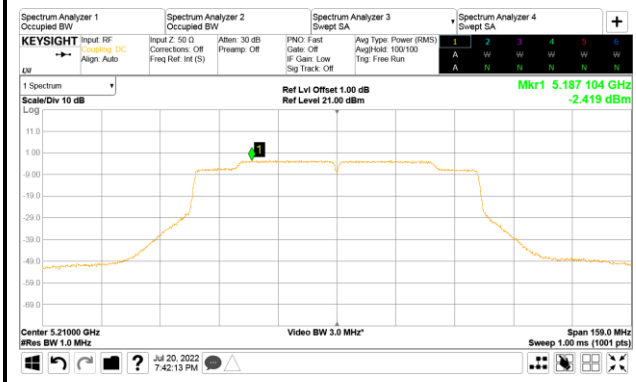	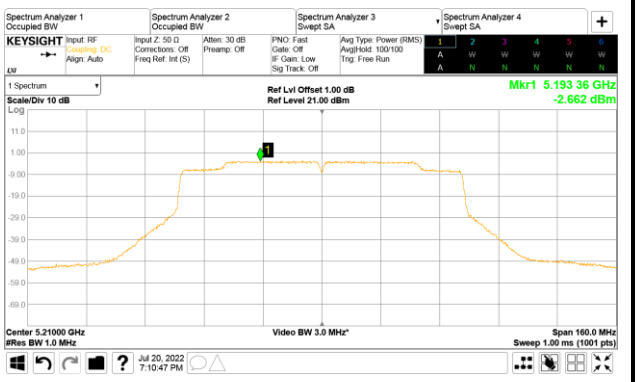
U-NII Band 2A	U-NII Band 2A
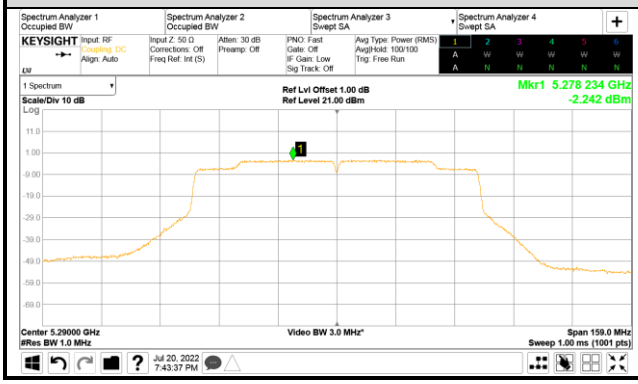	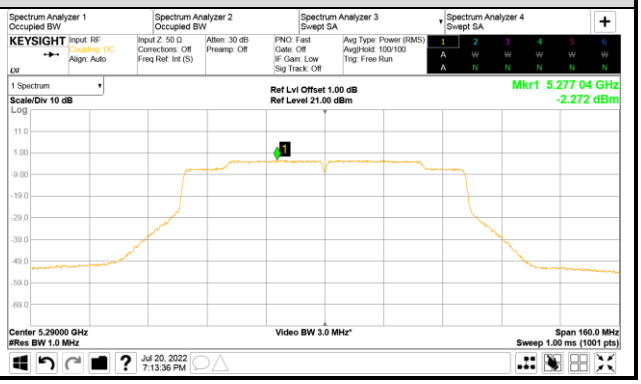

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11ac-VHT80	
AUX	Main
U-NII Band 2C	U-NII Band 2C
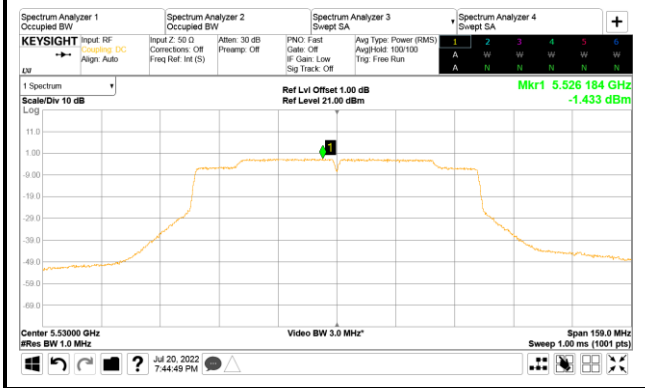	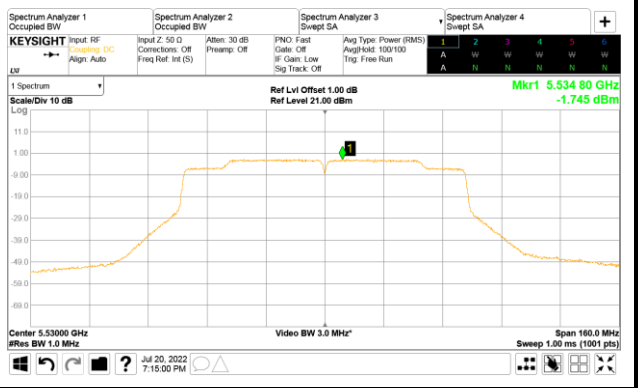
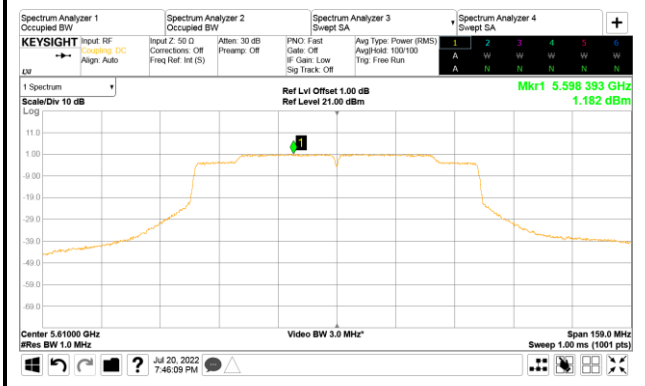	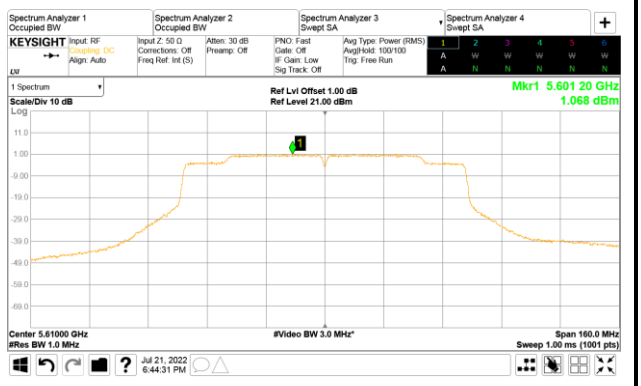
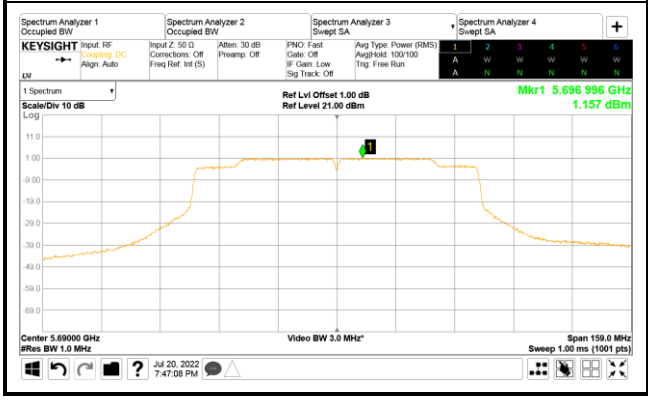	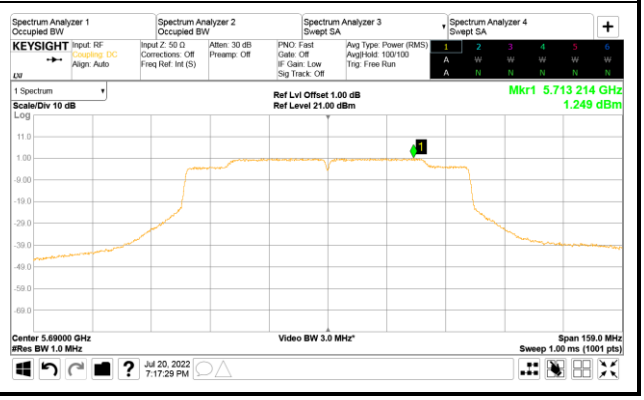

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11ac-VHT80	
AUX	Main
U-NII Band 3	U-NII Band 3
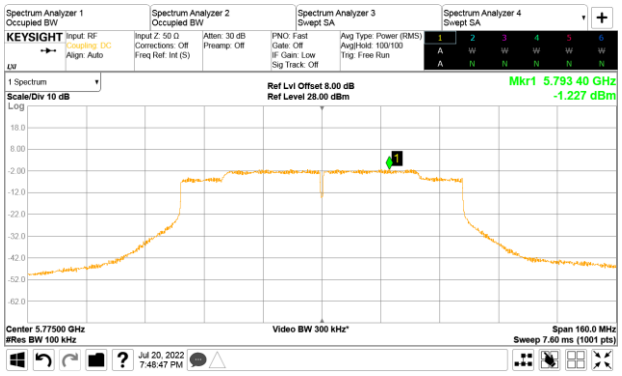	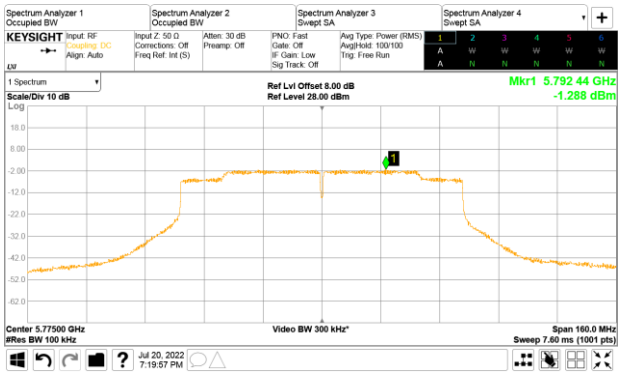

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode: 802.11ac-VHT160	
AUX	Main
U-NII Band 1/2A	U-NII Band 1/2A
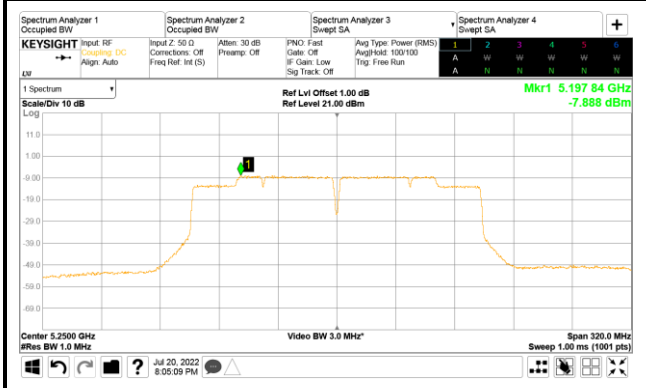	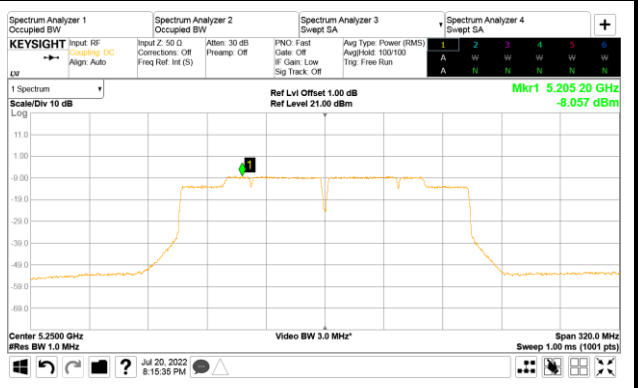
U-NII Band 2C	U-NII Band 2C
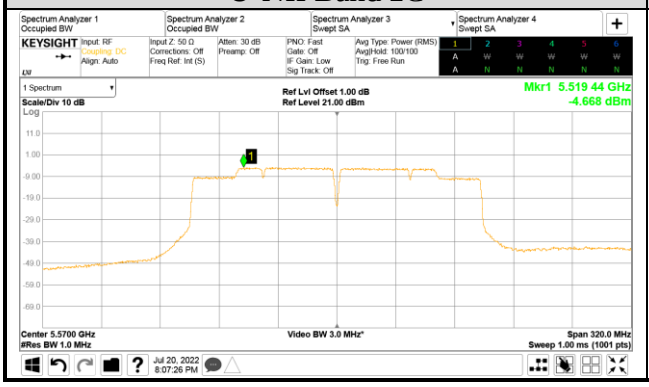	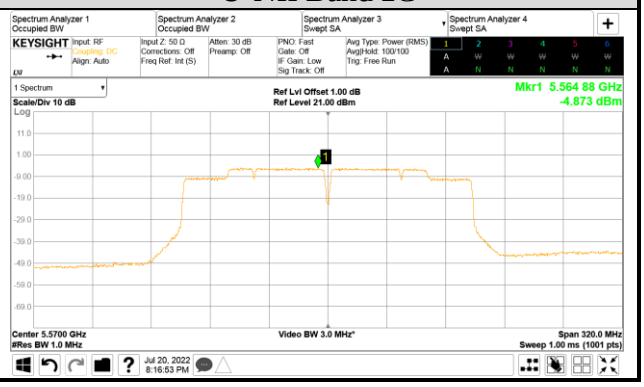

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.