



TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 2230 adapter card
Brand Name	Intel® Wi-Fi 6 AX203
Model Name	AX203NGW
FCC ID	PD9AX203NG
Date of Test Start/End	2020-10-13 /2020-12-15
Features	802.11ax, Dual Band, 2x2 Wi-Fi 6+ Bluetooth® 5.1 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E (see section 1)
---------------------	--

Test Report identification	200928-01.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
 This report shall not be reproduced, except in full, without the written approval of the laboratory.
 Reference to accreditation shall be used only by full reproduction of test report.

_____ Issued by _____ Reviewed by _____

Zayd OUACHICHA
(Test Engineer Lead)

Cheiel IN
(Technical Manager)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

- 1. Standards, reference documents and applicable test methods 3
- 2. General conditions, competences and guarantees 3
- 3. Environmental Conditions 3
- 4. Test samples 4
- 5. EUT Features 5
- 6. Remarks and comments 5
- 7. Test Verdicts summary 6
 - 7.1. 802.11 A/N/AC/AX – U-NII-1 6
 - 7.2. 802.11 A/N/AC/AX – U-NII-2A 6
- 8. Document Revision History 6
- Annex A. Test & System Description 7**
 - A.1 MEASUREMENT SYSTEM..... 7
 - A.2 TEST EQUIPMENT LIST 9
 - A.3 MEASUREMENT UNCERTAINTY EVALUATION 10
- Annex B. Test Results U-NII-1 & U-NII-2A..... 11**
 - B.1 TEST CONDITIONS..... 11
 - B.2 TEST RESULTS TABLES U-NII-1..... 12
 - B.2.1 26dB & 99% Bandwidth..... 12
 - B.2.2 Power Limits. Maximum Output power & Maximum power spectral density..... 15
 - B.2.3 Undesirable emission limits : out of band (Conducted)..... 21
 - B.2.4 Radiated spurious emission..... 22
 - B.3 TEST RESULTS TABLES U-NII-2A 34
 - B.3.1 26dB & 99% Bandwidth..... 34
 - B.3.2 Power Limits. Maximum Output power & Maximum power spectral density..... 37
 - B.3.3 Undesirable emissions limits : out of band (Conducted)..... 43
 - B.3.4 Radiated spurious emission..... 44
 - B.3.5 Undesirable emission limits: out of band (Conducted)..... 68
 - B.4 TEST SETUP 79
 - B.5 TEST SAMPLE 81

1. Standards, reference documents and applicable test methods

1. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2019-10-01 Edition
2. FCC Title 47 CFR part 15 - Subpart C – §15.209 Radiated emission limits; general requirements. 2019-10-01 Edition
3. FCC OET KDB 789033 D02 v02r01 General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E).
4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
5. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. General conditions, competences and guarantees

- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	21.5°C ± 4°C
Humidity	50% ± 16%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#1	200928-01.S01	WiFi 6 Module	AX203NGW	WFM:FC448214839F	2020-10-02	RF Conducted except cases #5
	170000-01.S02	Laptop	Latitude E5450	21HTPF2	2017-03-28	
	180717-03.S14	Extender	PCB00651_01	6510818-132	2018-08-21	
#2	200928-01.S03	WiFi 6 Module	AX203NGW	WFM:FC448214839A	2020-10-02	Used for 30MHz – 1GHz and 6.4GHz-40 GHz Radiated Spurious Emissions tests except cases #4
	170801-01.S42	Laptop	Latitude E5450	GTXV562	2018-01-18	
	180717-03.S18	Extender	PCB00651_01	6510818-133	2018-08-21	
	200611-03.S11	Main Antenna	Skycross	-	2020-07-15	
	200611.03-S12	Aux Antenna	Skycross	-	2020-07-15	
#3	200928-01.S04	WiFi 6 Module	AX203NGW	WFM:FC4482148421	2020-10-02	Used for 1-6.4 GHz Radiated Spurious Emissions tests
	170000-01.S16	Laptop	Latitude E5470	C2HTPF2	2017-06-13	
	180717-03.S13	Extender	PCB00651_01	6510818-131	2018-08-21	
	200611-03.S28	Main Antenna	Skycross	-	2020-07-01	
	200611-03.S29	Aux Antenna	Skycross	-	2020-07-01	
#4	200928-01.S03	WiFi 6 Module	AX203NGW	WFM:FC448214839A	2020-10-02	Used for 18-40 GHz Radiated Spurious Emssions tests: 802.11a_CH36_AntA 802.11a_CH40_AntA 802.11n20_CH48_AntA 802.11a_CH52_AntA 802.11a_CH56_AntA 802.11a_CH64_AntA 802.11n20_CH64_AntA+B 802.11HE20_CH64_AntB 802.11n40_CH54F_AntB 802.11HE40_CH54F_AntB 802.11ac80_CH58ac80_AntB
	170801-01.S10	Laptop	Latitude E7470	7KNOXF2	2017-09-08	
	200102-01.S03	Extender	ADEXELEC	-	2020-01-02	
	200928-02.S11	Adaptor	M2 Adaptor 1216	6961919-172	2020-10-27	
	200715-03.S06	Absorber	MCS absorber material	-	2020-07-23	
	200611-03.S11	Main Antenna	Skycross	-	2020-07-15	
	200611.03-S12	Aux Antenna	Skycross	-	2020-07-15	
#5	201210-01.S01	WIFI 6 Module	AX203NGW	FC448214839F	2020-10-02	Used for RF Conducted tests: 802.11ax40_Ch 38 802.11ax80_Ch 42
	170000-01.S02	Laptop	Latitude E5450	21HTPF2	2017-03-28	
	180717-03.S14	Extender	PCB00651_01	6510818-132	2018-08-21	

5. EUT Features

The herein information is provided by the customer

Brand Name	Intel® Wi-Fi 6 AX203		
Model Name	AX203NGW		
Software Version	99.3500.51.0-01594		
Driver Version	99.0.58.2		
Prototype / Production	Production		
Supported Radios	802.11b/g/n 802.11a/n/ac/ax Bluetooth 5.1	2.4GHz (2400.0 – 2483.5 MHz) 5.2GHz (5150.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz) 2.4GHz (2400.0 – 2483.5 MHz)	
Antenna Information	Transmitter	Main (chain A)	Aux (chain B)
	Manufacturer	SkyCross	Skycross
	Antenna type	PIFA antenna	PIFA antenna
	Part number	N/A	N/A
	Declared antenna gain (dBi)	+5	+5
Document	Filename	Date of receipt	
	Intel_Ref_Antenna data_HMC-M2 Ant_Spec_Universe_SkyCross Antenna	2013-01-28	

6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. 802.11 a/n/ac/ax – U-NII-1

FCC part	Test name	Verdict
15.407 (a) (1)	Power Limits. Maximum output power	P
15.407 (a) (1)	Power spectral density	P
15.407 (b) (1) 15.209	Undesirable emissions limits: Band Edge (conducted)	P
15.407 (b) (1) 15.209	Undesirable emissions limits: Spurious emissions (radiated)	P

7.2. 802.11 a/n/ac/ax – U-NII-2A

FCC part	Test name	Verdict
15.407 (a) (2)	Power Limits. Maximum output power	P
15.407 (a) (2)	Power spectral density	P
15.407 (b) (2) 15.209	Undesirable emissions limits: Band Edge (conducted)	P
15.407 (b) (2) 15.209	Undesirable emissions limits: Spurious emissions (radiated)	P

P: Pass
 F: Fail
 NM: Not Measured
 NA: Not Applicable

8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	C.Requin	First Issue

Annex A. Test & System Description

A.1 Measurement System


Measurements were performed using the following setups, made in accordance to the general provisions of FCC OET KDB 789033 D02 General UNII Test Procedures.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

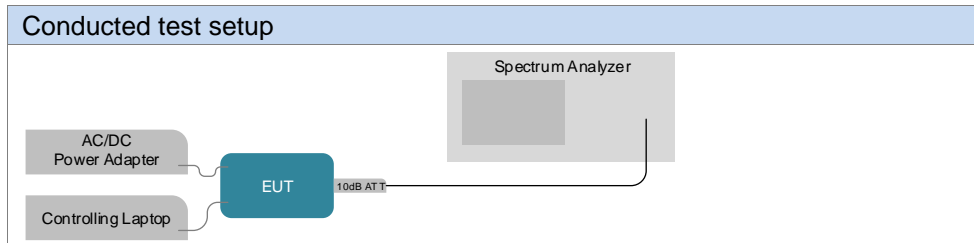


Radiated test setup


Radiated Setup 30 MHz - 1 GHz

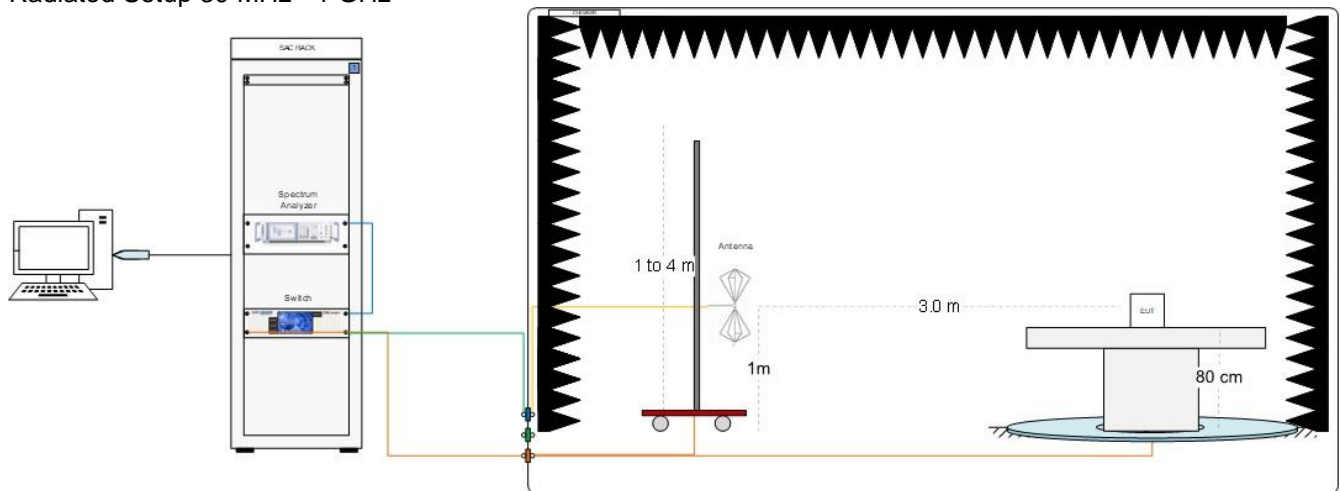


Radiated Setup 1 GHz – 6.4 GHz

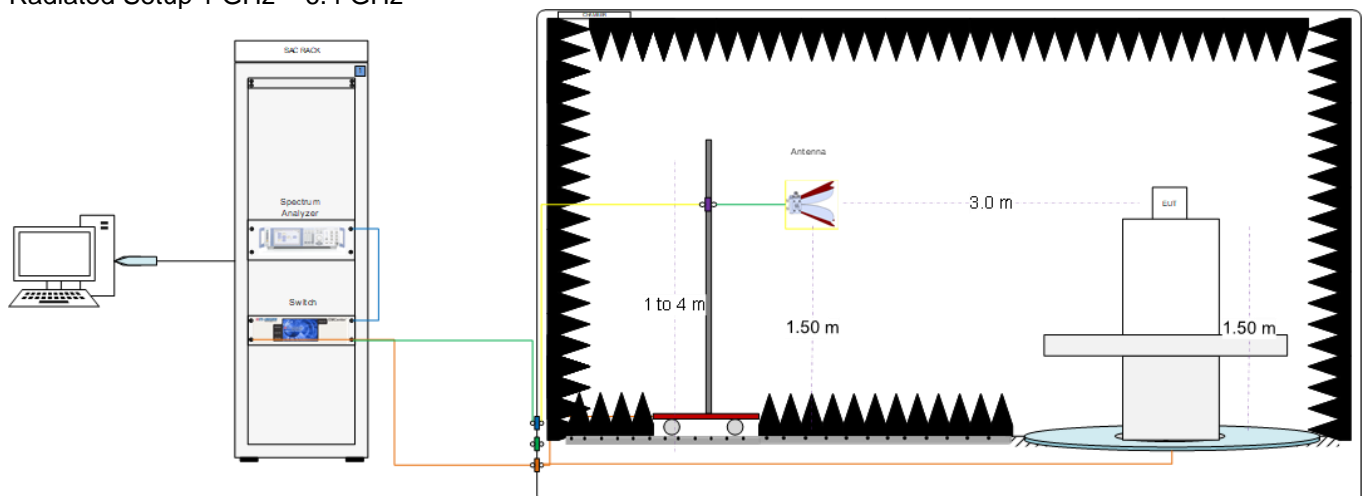

Radiated Setup 6.4 GHz - 18 GHz

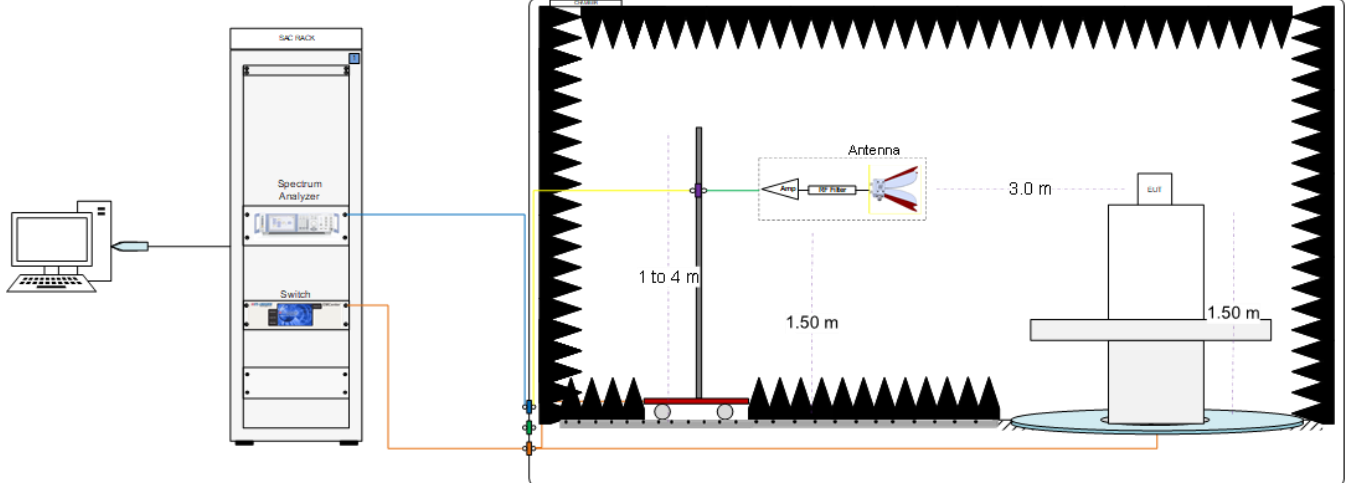

Radiated Setup 18 GHz – 40 GHz

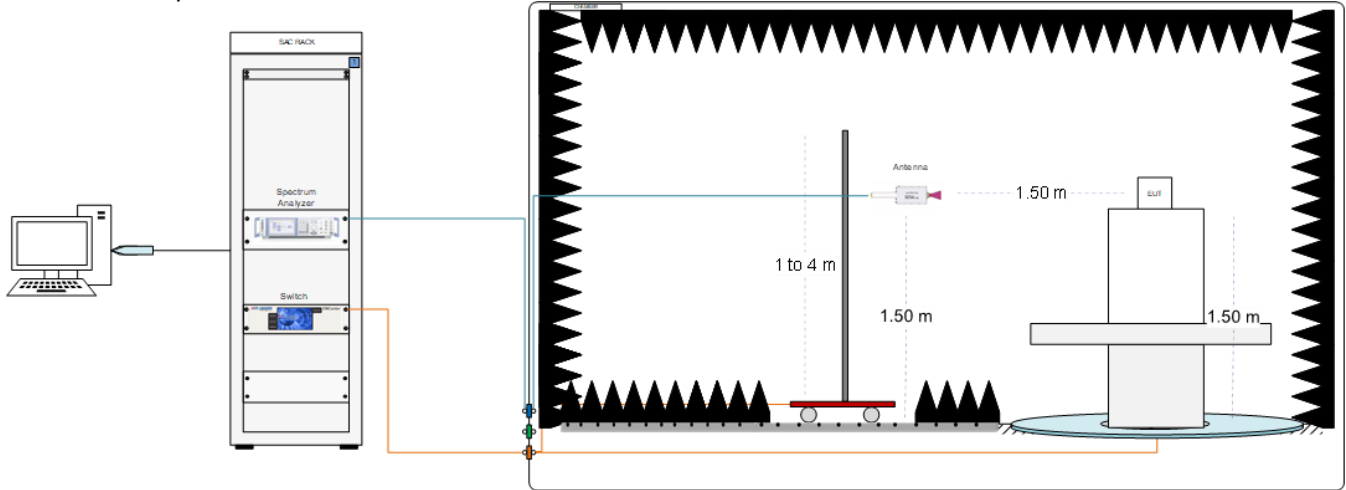

Sample Calculation

The spurious received voltage V (dB μ V) in the spectrum Analyzer is converted to Electric field strength using the transducer factor F corresponding to the Rx path Loss:

$$F \text{ (dB/m)} = \text{Rx Antenna Factor (dB/m)} + \text{Cable losses (dB)} - \text{Amplifiers Gain (dBi)}$$

$$E \text{ (dB}\mu\text{V/m)} = V \text{ (dB}\mu\text{V)} + F \text{ (dB/m)}$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in dB μ V/m

E_{Meas} is the field strength of the emission at the measurement distance, in dB μ V/m

D_{Meas} is the measurement distance, in m

$D_{\text{SpecLimit}}$ is the distance specified by the limit, in m

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0316	Spectrum Analyzer	FSV30	103309	Rohde & Schwarz	2019-09-02	2021-09-02
0442	RF cable 50cm	Coax 2.92mm Male To 2.92mm Male	N/A	PASTERNAK	2020-08-26	2021-02-26
1044	10dB Attenuator + MH4	N/A	N/A	N/A	N/A	N/A
0583	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B9D6E	AVITECH	2019-09-06	2021-09-06
1002	Measurement SW v1.5.4.2	Octopi	N/A	Step AT	N/A	N/A

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0135	Anechoic Chamber	FACT3	5720	ETS-Lindgren	2020-07-06	2022-07-06
0136	Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
0147	Switch & Positioning systems	EMC Center	00159757	ETS-Lindgren	N/A	N/A
0530	Measurement SW	EMC32, v10.40.10	100623	Rohde & Schwarz	N/A	N/A
1033	Boresight antenna mast	BAM 4.0-P	P/278/2890.01	Maturo	N/A	N/A
0420	Spectrum Analyzer	FSV40	101556	Rohde & Schwarz	2020-05-25	2022-05-25
0993	Biconical antenna 30 MHz – 1 GHz	UBAA9115 + BBVU9135 + DGA9552N	0286 + CH 9044	Schwarzbeck	2019-11-22	2021-11-22
0325	Horn antenna	3117	00157734	ETS-Lindgren	2019-08-12	2021-08-12
0141	Horn Antenna + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-02	2022-04-02
0334	Double-Ridged Waveguide Horn with Pre-Amplifier 18 GHz to 40 GHz	3116C+PA	00169308bis + 00196308	ETS-Lindgren	2019-07-24	2021-07-24
0202	Cable 1m - 30MHz to 18 GHz	UFB311A-0-3360-50U300	MFR 64639223229-001	Micro-coax	2020-08-25	2021-02-25
0206	Cable 1.2m – 18 to 40 GHz	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-coax	2020-08-25	2021-02-25
0263	Cable 1m - 1GHz to 18GHz	UFA147A	-	Utiliflex	2020-08-25	2021-02-25
0369	Cable 2m - 26.5GHz to 40GHz	794-9191-2000A	E00327	Atem	2020-08-25	2021-02-25
0371	Cable 1m – 30 MHz - 18GHz	UFB311A-0-0590-50U50U	MFR 64639 223230-001	Micro-coax	2020-08-25	2021-02-25
0758	Cable 7.5m - 30MHz to 18GHz	0501051057000GX	18.23.181	Radiall	2020-08-25	2021-02-25
0809	Cable 7m - 18GHz to 40GHz	R286304009	-	Radiall	2020-08-25	2021-02-25
0859	Cable 2.5m - 30MHz to 18GHz	0500990992500KE	19.23.395	Radiall	2020-08-25	2021-02-25
0797	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D0EB1A	Avtech	2019-07-04	2021-07-04

N/A: Not Applicable

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0337	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2020-07-06	2022-07-06
0238	Switch & Positioner	EMCenter	00151232	ETS Lindgren	N/A	N/A
0382	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
0383	Turntable	-	-	ETS Lindgren	N/A	N/A
0329	Measurement SW	EMC32, v10.50.10	100401	Rohde & Schwarz	N/A	N/A
0133	Spectrum Analyzer	FSV40	101358	Rohde & Schwarz	2020-02-25	2022-02-25
0138	Double Ridge Horn (1- 18GHz)	3117	00152266	ETS Lindgren	2020-03-08	2022-03-08
0141	Horn Antenna 3117 + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-02	2022-04-02
0334	Double Horn Ridged antenna	3116C-PA	00169308bis + 00196308	ETS-Lindgren	2019-07-24	2021-07-24
0871	RF Cable 1-18GHz, 1.5 m	0501050991200GX	19.21.710	Radiall	2020-08-20	2021-02-20
0860	RF Cable 1-18GHz, 1.2 m	2301761761200PJ	12.22.1104	Radiall	2020-08-20	2021-02-20
0275	RF Cable 1-18GHz - 6.5m	140-8500-11-51	001	Spectrum	2020-08-20	2021-02-20
0684	RF Cable 1GHz-18GHz 1.5m	-	-	Spirent	2020-08-20	2021-02-20
0679	RF Cable 18-40 GHz 6m	R286304009	1747364	Radiall	2020-08-20	2021-02-20
0028	RF Cable 1.2m 40MHz-40GHz	794-9191-1200A	DA585	Atem	2020-08-20	2021-02-20
0725	RF Cable 1-9.5GHz 1.2m	0500990991200KE	-	Radiall	2020-08-20	2021-02-20
0796	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D4F316	Avtech	2019-07-05	2021-07-05

N/A: Not Applicable

Radiated Setup - shared equipments

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0616	Power Sensor	NRP-Z81	104385	Rohde & Schwarz	2020-04-08	2022-04-08
0617	Power Sensor	NRP-Z81	104386	Rohde & Schwarz	2020-04-08	2022-04-08
0618	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2020-04-08	2022-04-08

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of k = 2 to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	±0.12	%
Power Spectral density	±1.47	dB
Occupied bandwidth	±2.07	%
Conducted Power	±1.03	dB
Conducted Spurious Emission <40 GHz	±3.45	dB
Radiated tests <1GHz	±5.26	dB
Radiated tests 1GHz – 40 GHz	±4.34	dB

Annex B. Test Results U-NII-1 & U-NII-2A

The herein test results were performed by:

Test case measurement	Test Engineer
26dB & 99% bandwidth	C.Requin
Power Limits. Maximum output power	C.Requin
Power spectral density	C.Requin
Undesirable emissions limits: Band Edge (conducted)	C.Requin
Undesirable emissions limits (radiated)	A.Lounes. N.Nachabe, N.Bui

B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 & 802.11ax20 (20 MHz channel bandwidth), 802.11n40 & 802.11ax40 (40MHz channel bandwidth) and 802.11ac80 & 802.11ax80 (80MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO	802.11a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80	VHT0
	802.11ax	20	HE0
		40	HE0
		80	HE0
MIMO	802.11n	20/40	HT8
	802.11ac	80	VHT0
	802.11ax	20/40/80	HE0

B.2 Test Results Tables U-NII-1

B.2.1 26dB & 99% Bandwidth

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Mode	Rate	Antenna	Channel	Freq [MHz]	26dB BW [MHz]	99% BW [MHz]			
802.11a	6Mbps	SISO A	36	5180	23.80	16.56			
			40	5200	24.65	16.72			
			48	5240	24.80	16.68			
		SISO B	36	5180	23.70	16.68			
			40	5200	25.55	16.80			
			48	5240	25.55	16.80			
802.11n20	HT0	SISO A	36	5180	23.85	17.76			
			40	5200	24.00	17.76			
			48	5240	25.50	17.80			
		SISO B	36	5180	23.70	17.72			
			40	5200	25.90	17.84			
			48	5240	25.35	17.84			
	HT8	MIMO A	36	5180	24.15	17.72			
			40	5200	24.45	17.64			
			48	5240	24.25	17.76			
		MIMO B	36	5180	23.30	17.64			
			40	5200	24.00	17.76			
			48	5240	23.95	17.68			
802.11n40	HT0	SISO A	38	5190	43.47	36.16			
			46	5230	44.28	36.08			
		SISO B	38	5190	43.29	36.00			
			46	5230	43.65	36.08			
	HT8	MIMO A	38	5190	42.39	36.00			
			46	5230	42.66	36.16			
		MIMO B	38	5190	41.67	35.92			
			46	5230	41.67	36.00			
			802.11ac80	VHT0	SISO A	42	5210	84.93	75.00
					SISO B			85.12	75.00
MIMO A	87.40	75.00							
MIMO B	86.07	75.00							

Max Value

Mode	Rate	Antenna	Channel	Freq [MHz]	RU config.	26dB BW [MHz]	99% BW [MHz]
802.11ax20	HE0	SISO A	36	5180	Full	22.70	18.88
					26/0	20.70	18.20
					52/37	21.50	16.12
					106/53	22.05	18.04
			40	5200	Full	24.85	18.96
			48	5240	Full	24.85	18.88
		SISO B	36	5180	Full	24.30	18.84
					26/0	20.45	17.28
					52/37	21.35	18.36
					106/53	21.80	18.24
			40	5200	Full	25.25	18.96
			48	5240	Full	25.80	18.92
		MIMO A	36	5180	Full	23.40	18.92
					26/0	20.65	18.40
					52/37	21.05	17.68
					106/53	22.30	17.88
			40	5200	Full	23.70	18.88
			48	5240	Full	23.20	18.88
		MIMO B	36	5180	Full	23.60	18.96
					26/0	21.00	18.60
					52/37	21.90	18.28
					106/53	23.55	18.20
			40	5200	Full	23.70	18.96
			48	5240	Full	23.90	18.92
802.11ax40	HE0	SISO A	38	5190	Full	42.21	37.52
					242/61	23.58	18.80
			46	5230	Full	43.38	37.68
		SISO B	38	5190	Full	41.85	37.68
					242/61	23.76	18.72
			46	5230	Full	42.39	37.44
		MIMO A	38	5190	Full	42.93	37.52
					242/61	23.76	18.88
			46	5230	Full	42.66	37.60
		MIMO B	38	5190	Full	42.39	37.60
					242/61	24.12	18.80
			46	5230	Full	42.03	37.60
802.11ax80	HE0	SISO A	42	5210	Full	83.98	76.56
					484/65	42.56	37.44
		SISO B			Full	83.41	76.68
					484/65	42.94	37.32
		MIMO A			Full	83.60	76.80
					484/65	42.94	37.44
		MIMO B			Full	82.65	76.68
					484/65	42.56	37.32

Max Value

See Section C.1.1 for the screenshot results

B.2.2 Power Limits. Maximum Output power & Maximum power spectral density

Test limits

FCC part	Limits
15.407 (a) (1) (iv)	For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to section E) 2) e) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables
Duty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11a	6Mbps	SISO A	97.50%
		SISO B	97.50%
802.11n20	HT0	SISO A	98.65%
		SISO B	98.65%
	HT8	MIMO A	98.65%
		MIMO B	98.65%
802.11ax20	HE0	SISO A	98.67%
		SISO B	98.67%
		MIMO A	98.67%
		MIMO B	98.67%
802.11n40	HT0	SISO A	98.74%
		SISO B	98.74%
	HT8	MIMO A	98.73%
		MIMO B	98.73%
802.11ax40	HE0	SISO A	98.86%
		SISO B	98.86%
		MIMO A	98.73%
		MIMO B	98.73%
802.11ac80	VHT0	SISO A	98.66%
		SISO B	98.66%
		MIMO A	98.60%
		MIMO B	98.60%
802.11ax80	HE0	SISO A	98.66%
		SISO B	98.66%
		MIMO A	98.67%
		MIMO B	98.67%

Maximum output power

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]	
802.11a	6Mbps	36	5180	SISO A	18.59	18.70	23.70	74.13	
				SISO B	17.80	17.91	22.91	61.80	
		40	5200	SISO A	20.96	21.07	26.07	127.94	
				SISO B	20.50	20.61	25.61	115.08	
		48	5240	SISO A	20.52	20.63	25.63	115.61	
				SISO B	20.34	20.45	25.45	110.92	
802.11n20	HT0	36	5180	SISO A	18.51	18.51	23.51	70.96	
				SISO B	17.80	17.80	22.80	60.26	
		40	5200	SISO A	20.14	20.14	25.14	103.28	
				SISO B	20.42	20.42	25.42	110.15	
		48	5240	SISO A	20.75	20.75	25.75	118.85	
				SISO B	20.32	20.32	25.32	107.65	
	HT8	36	5180	MIMO A	16.16	16.16	21.16	41.30	
				MIMO B	15.90	15.90	20.90	38.90	
				Combined A+B	19.04	19.04	24.04	80.21	
		40	5200	MIMO A	17.49	17.49	22.49	56.10	
				MIMO B	17.36	17.36	22.36	54.45	
				Combined A+B	20.44	20.44	25.44	110.56	
	48	5240	MIMO A	17.84	17.84	22.84	60.81		
			MIMO B	18.01	18.01	23.01	63.24		
			Combined A+B	20.94	20.94	25.94	124.05		
	802.11n40	HT0	38	5190	SISO A	18.15	18.15	23.15	65.31
					SISO B	18.02	18.02	23.02	63.39
			46	5230	SISO A	20.46	20.46	25.46	111.17
SISO B					19.53	19.53	24.53	89.74	
HT8		38	5190	MIMO A	14.92	14.92	19.92	31.05	
				MIMO B	15.10	15.10	20.10	32.36	
				Combined A+B	18.02	18.02	23.02	63.40	
		46	5230	MIMO A	17.43	17.43	22.43	55.34	
				MIMO B	17.42	17.42	22.42	55.21	
				Combined A+B	20.44	20.44	25.44	110.54	
802.11ac80	VHT0	42	5210	SISO A	17.94	17.94	22.94	62.23	
				SISO B	18.08	18.08	23.08	64.27	
				MIMO A	15.67	15.67	20.67	36.90	
				MIMO B	15.52	15.52	20.52	35.65	
				Combined A+B	18.61	18.61	23.61	72.54	

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]		
802.11ax20	HE0	36	5180	SISO A	Full	18.42	18.42	23.42	69.50		
					26/0	13.21	13.21	18.21	20.94		
					52/37	16.33	16.33	21.33	42.96		
				SISO B	106/53	19.02	19.02	24.02	79.80		
					Full	17.75	17.75	22.75	59.57		
					26/0	13.41	13.41	18.41	21.93		
				MIMO A	52/37	16.20	16.20	21.20	41.69		
					106/53	19.00	19.00	24.00	79.43		
					Full	15.88	15.88	20.88	38.73		
				MIMO B	26/0	9.70	9.70	14.70	9.33		
					52/37	13.41	13.41	18.41	21.93		
					106/53	16.03	16.03	21.03	40.09		
		Combined A+B	Full	15.98	15.98	20.98	39.63				
			26/0	10.33	10.33	15.33	10.79				
			52/37	13.66	13.66	18.66	23.23				
		SISO A	106/53	16.00	16.00	21.00	39.81				
			Full	18.94	18.94	23.94	78.35				
			26/0	13.04	13.04	18.04	20.12				
		SISO B	52/37	16.55	16.55	21.55	45.16				
			106/53	19.03	19.03	24.03	79.90				
			Full	20.65	20.65	25.65	116.08				
		40	5200	40	5200	SISO A	Full	20.65	20.65	25.65	116.08
						SISO B	Full	20.45	20.45	25.45	110.92
						MIMO A	Full	17.46	17.46	22.46	55.72
MIMO B	Full					17.47	17.47	22.47	55.85		
Combined A+B	Full					20.48	20.48	25.48	111.57		
48	5240	48	5240	SISO A	Full	20.57	20.57	25.57	113.93		
				SISO B	Full	20.57	20.57	25.57	114.02		
				MIMO A	Full	17.99	17.99	22.99	62.95		
				MIMO B	Full	17.89	17.89	22.89	61.52		
				Combined A+B	Full	20.95	20.95	25.95	124.47		
802.11ax40	HE0	38	5190	SISO A	Full	17.25	17.25	22.25	53.09		
					242/61	18.29	18.29	23.29	67.45		
				SISO B	Full	17.36	17.36	22.36	54.45		
					242/61	17.84	17.84	22.84	60.81		
				MIMO A	Full	15.12	15.12	20.12	32.51		
					242/61	16.00	16.00	21.00	39.81		
		MIMO B	Full	14.90	14.90	19.90	30.90				
			242/61	15.79	15.79	20.79	37.93				
		Combined A+B	Full	18.02	18.02	23.02	63.41				
			242/61	18.91	18.91	23.91	77.74				
		46	5230	46	5230	SISO A	Full	20.16	20.16	25.16	103.73
						SISO B	Full	19.33	19.33	24.33	85.70
MIMO A	Full					17.78	17.78	22.78	59.98		
MIMO B	Full					17.54	17.54	22.54	56.75		
Combined A+B	Full					20.67	20.67	25.67	116.73		
802.11ax80	HE0	42	5210	SISO A	Full	17.45	17.45	22.45	55.60		
					484/65	17.24	17.24	22.24	52.91		
				SISO B	Full	17.61	17.61	22.61	57.68		
					484/65	16.61	16.61	21.61	45.81		
				MIMO A	Full	15.66	15.66	20.66	36.81		
					484/65	15.19	15.19	20.19	33.04		
				MIMO B	Full	15.50	15.50	20.50	35.48		
					484/65	14.78	14.78	19.78	30.06		
Combined A+B	Full	18.59	18.59	23.59	72.29						
484/65	18.00	18.00	23.00	63.10							

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Maximum power spectral Density (PSD)

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]	
802.11a	6Mbps	36	5180	SISO A	7.79	7.90	
				SISO B	7.01	7.12	
		40	5200	SISO A	10.16	10.27	
				SISO B	9.71	9.82	
		48	5240	SISO A	9.73	9.84	
				SISO B	9.54	9.65	
802.11n20	HT0	36	5180	SISO A	7.51	7.51	
				SISO B	6.82	6.82	
		40	5200	SISO A	9.14	9.14	
				SISO B	9.44	9.44	
		48	5240	SISO A	9.75	9.75	
				SISO B	9.34	9.34	
	HT8	36	5180	MIMO A	5.17	5.17	
				MIMO B	4.92	4.92	
				Combined A+B	8.06	8.06	
		40	5200	MIMO A	6.50	6.50	
				MIMO B	6.39	6.39	
				Combined A+B	9.46	9.46	
	48	5240	MIMO A	6.84	6.84		
			MIMO B	7.03	7.03		
			Combined A+B	9.95	9.95		
	802.11n40	HT0	38	5190	SISO A	3.75	3.75
					SISO B	3.61	3.61
			46	5230	SISO A	6.03	6.03
SISO B					5.14	5.14	
HT8		38	5190	MIMO A	0.50	0.50	
				MIMO B	0.67	0.67	
				Combined A+B	3.60	3.60	
		46	5230	MIMO A	2.99	2.99	
				MIMO B	3.01	3.01	
				Combined A+B	6.01	6.01	
802.11ac80		VHT0	42	5210	SISO A	0.44	0.44
					SISO B	0.58	0.58
	MIMO A				-1.86	-1.86	
	MIMO B				-1.96	-1.96	
	Combined A+B				1.10	1.10	

* Maximum values are the duty cycle compensated values calculated from the measured average values

Mode	Rate	#Ch	Freq [MHz]	Antenna	RU config.	Average cond.PSD [dBm/MHz]	Max*cond.PSD [dBm/MHz]	
802.11ax20	HE0	36	5180	SISO A	Full	7.22	7.22	
					26/0	10.41	10.41	
					52/37	10.59	10.59	
					106/53	10.20	10.20	
				SISO B	Full	6.59	6.59	
					26/0	10.61	10.61	
					52/37	10.46	10.46	
					106/53	10.19	10.19	
				MIMO A	Full	4.71	4.71	
					26/0	6.88	6.88	
					52/37	7.67	7.67	
					106/53	7.20	7.20	
		MIMO B	Full	4.80	4.80			
			26/0	7.52	7.52			
			52/37	7.93	7.93			
			106/53	7.18	7.18			
		Combined A+B	Full	7.77	7.77			
			26/0	10.22	10.22			
			52/37	10.81	10.81			
			106/53	10.20	10.20			
		40	5200	SISO A	Full	9.45	9.45	
					SISO B	Full	9.27	9.27
					MIMO A	Full	6.27	6.27
					MIMO B	Full	6.28	6.28
Combined A+B	Full				9.29	9.29		
48	5240	SISO A	Full	9.38	9.38			
			SISO B	Full	9.39	9.39		
			MIMO A	Full	6.79	6.79		
			MIMO B	Full	6.70	6.70		
			Combined A+B	Full	9.76	9.76		
802.11ax40	HE0	38	5190	SISO A	Full	1.94	1.94	
					242/61	7.01	7.01	
				SISO B	Full	2.37	2.37	
					242/61	6.54	6.54	
				MIMO A	Full	0.53	0.53	
					242/61	4.70	4.70	
				MIMO B	Full	0.28	0.28	
		242/61	4.49		4.49			
		Combined A+B	Full	3.42	3.42			
			242/61	7.61	7.61			
		46	5230	SISO A	Full	5.56	5.56	
					SISO B	Full	4.72	4.72
					MIMO A	Full	3.16	3.16
					MIMO B	Full	2.91	2.91
Combined A+B	Full				6.05	6.05		
802.11ax80	HE0	42	5210	SISO A	Full	-0.21	-0.21	
					484/65	2.68	2.68	
				SISO B	Full	0.02	0.02	
					484/65	2.07	2.07	
				MIMO A	Full	-1.95	-1.95	
					484/65	0.62	0.62	
				MIMO B	Full	-2.08	-2.08	
					484/65	0.23	0.23	
				Combined A+B	Full	1.00	1.00	
					484/65	3.44	3.44	

* Maximum values are the duty cycle compensated values calculated from the measured average values

See Section C.1.2 for the screenshot results

B.2.3 Undesirable emission limits : out of band (Conducted)

Test limits

FCC part	Limits																				
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th> <th>Field Strength (µV/m)</th> <th>Field Strength (dBµV/m)</th> <th>Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td>30-88</td> <td>100</td> <td>40</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>43.5</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>46</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>54</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the out of band domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

For Band Edge measurements in peak mode, both lower and upper side of the out of band were performed using the integration method as defined in the out of band measurements section (paragraph II.G.3.d) of 789033 D02 v02r01.

For Band Edge measurements in average mode on the low frequency section, one of the two methods is used according to section G) 6) (KDB 789033 D02):

- 1) Integration method as per paragraph II.G.3.d.
- 2) Method VB (Averaging using reduced video bandwidth) as per paragraph II.G.6.d.

In case of out of band measurements falling in restricted bands, the declared antenna gain is also compensated in the graph.

For out of band measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBµV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
Above 960	3	500	54.0	-41.2

See Section C.1.3 for the screenshot results.

B.2.4 Radiated spurious emission

Standard references

FCC part	Limits																																
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																																
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" data-bbox="541 562 1331 911"> <thead> <tr> <th data-bbox="547 568 740 631">Freq Range (MHz)</th> <th data-bbox="740 568 933 631">Field Strength (μV/m)</th> <th data-bbox="933 568 1126 631">Field Strength (dBμV/m)</th> <th data-bbox="1126 568 1326 631">Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td data-bbox="547 631 740 674">0.009-0.490</td> <td data-bbox="740 631 933 674">2400/f(kHz)</td> <td data-bbox="933 631 1126 674">-</td> <td data-bbox="1126 631 1326 674">300</td> </tr> <tr> <td data-bbox="547 674 740 716">0.490-1.705</td> <td data-bbox="740 674 933 716">24000/f(kHz)</td> <td data-bbox="933 674 1126 716">-</td> <td data-bbox="1126 674 1326 716">300</td> </tr> <tr> <td data-bbox="547 716 740 759">1.705-30.0</td> <td data-bbox="740 716 933 759">30</td> <td data-bbox="933 716 1126 759">-</td> <td data-bbox="1126 716 1326 759">30</td> </tr> <tr> <td data-bbox="547 759 740 801">30-88</td> <td data-bbox="740 759 933 801">100</td> <td data-bbox="933 759 1126 801">40</td> <td data-bbox="1126 759 1326 801">3</td> </tr> <tr> <td data-bbox="547 801 740 844">88-216</td> <td data-bbox="740 801 933 844">150</td> <td data-bbox="933 801 1126 844">43.5</td> <td data-bbox="1126 801 1326 844">3</td> </tr> <tr> <td data-bbox="547 844 740 887">216-960</td> <td data-bbox="740 844 933 887">200</td> <td data-bbox="933 844 1126 887">46</td> <td data-bbox="1126 844 1326 887">3</td> </tr> <tr> <td data-bbox="547 887 740 929">Above 960</td> <td data-bbox="740 887 933 929">500</td> <td data-bbox="933 887 1126 929">54</td> <td data-bbox="1126 887 1326 929">3</td> </tr> </tbody> </table> <p data-bbox="389 943 1485 1061">The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p data-bbox="389 1066 1485 1153">For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Meas. Distance (m)																														
0.009-0.490	2400/f(kHz)	-	300																														
0.490-1.705	24000/f(kHz)	-	300																														
1.705-30.0	30	-	30																														
30-88	100	40	3																														
88-216	150	43.5	3																														
216-960	200	46	3																														
Above 960	500	54	3																														

Test procedure

The radiated setup shown in section *Test & System Description* was used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the section B.1 and using the low, middle and high channels.

For 802.11ax20, 802.11ax40 and 802.11ax80 modes the worst case in terms of spurious emissions found among the low, mid and high channels tested on chain A and B separately is used to perform the test in MIMO mode (Chain A+B).

For 802.11n20, 802.11n40 and 802.11ac80 modes the worst case in terms of spurious emissions found among the low, mid and high channels tested on 802.11ax20, 802.11ax40 and 802.11ax80 is used to perform the test in chain A, B, and A+B modes.

Test Results

Radiated spurious - 30 MHz – 1 GHz

Radiated Spurious – All modes

Frequency	Quasi-Peak	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dB	---
47.8	36.4	68.2	31.8	V
50.4	34.8	68.2	33.4	V

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A

Radiated Spurious – CH36

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3369.5	59.5	---	68.2	8.7	H
10363.3	54.1	---	68.2	14.1	V
20720.0	49.3	---	74.0	24.7	V
20720.0	---	40.4	54.0	13.6	V

Radiated Spurious – CH40

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3310.0	59.7	---	68.2	8.5	H
10399.6	50.2	---	68.2	18.0	H
20799.3	48.1	---	74.0	25.9	V
20799.8	---	38.9	54.0	15.1	V

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3294.5	59.7	---	68.2	8.5	V
10474.0	55.3	---	68.2	12.9	V
15719.6	57.3	---	74.0	16.7	V
15719.6	---	51.2	54.0	2.8	V
20957.1	59.8	---	74.0	14.2	V
20963.7	---	51.5	54.0	2.5	V

1 GHz - 40 GHz, 802.11a, 6Mbps, Chain B

Radiated Spurious – CH36

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3372.0	60.0	---	68.2	8.2	H
10362.9	49.5	---	68.2	18.7	V
20720.0	51.3	---	74.0	22.7	V
20720.0	---	50.9	54.0	3.1	V

Radiated Spurious – CH40

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3371.5	59.5	---	68.2	8.7	H
10398.6	51.6	---	68.2	16.6	V
20799.8	51.2	---	74.0	22.8	V
20799.8	---	50.0	54.0	4.0	V

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3388.0	59.0	---	68.2	9.2	V
10482.7	53.9	---	68.2	14.3	H
20959.9	51.3	---	74.0	22.7	V
20959.9	---	50.3	54.0	3.7	V

1 GHz - 40 GHz, 802.11n20, HT0, Chain A
Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3373.0	60.0	---	68.2	8.2	V
10481.3	56.1	---	68.2	12.1	V
20959.9	---	39.7	54.0	14.3	V
20960.4	47.5	---	74.0	26.5	V

1 GHz - 40 GHz, 802.11n20, HT0, Chain B
Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3388.5	59.8	---	68.2	8.4	V
10480.8	52.0	---	68.2	16.2	H
20959.9	51.0	---	74.0	23.0	V
20959.9	---	50.5	54.0	3.5	V

1 GHz - 40 GHz, 802.11n20, HT8, Chain A+B

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3384.5	59.6	---	68.2	8.6	V
10477.9	56.0	---	68.2	12.2	V
20953.3	57.2	---	74.0	16.8	V
20959.9	---	46.6	54.0	7.4	V

1 GHz - 40 GHz, 802.11n40, HT0, Chain A

Radiated Spurious – CH38

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3368.5	60.5	---	68.2	7.7	H
10375.9	53.4	---	68.2	14.8	V
20759.7	---	50.1	54.0	3.9	V
20765.3	54.5	---	74.0	19.4	V

1 GHz - 40 GHz, 802.11n40, HT0, Chain B

Radiated Spurious – CH38

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3380.0	58.5	---	68.2	9.7	V
10384.1	48.7	---	68.2	19.5	V
20759.7	50.8	---	74.0	23.2	V
20759.7	---	49.5	54.0	4.5	V

1 GHz - 40 GHz, 802.11n40, HT8, Chain A+B
Radiated Spurious – CH38

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3381.5	59.7	---	68.2	8.5	H
10379.3	53.7	---	68.2	14.5	V
20759.7	---	48.5	54.0	5.5	V
20760.1	50.9	---	74.0	23.1	V

1 GHz - 40 GHz, 802.11ac80, VHT0, Chain A
Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3398.5	58.1	---	68.2	10.1	V
10416.0	53.5	---	68.2	14.7	V
20839.9	---	49.6	54.0	4.4	V
20847.0	54.6	---	74.0	19.4	V

1 GHz - 40 GHz, 802.11ac80, VHT0, Chain B
Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3396.0	58.0	---	68.2	10.2	H
10414.6	49.5	---	68.2	18.7	V
20839.9	51.4	---	74.0	22.6	V
20839.9	---	50.8	54.0	3.2	V

1 GHz - 40 GHz, 802.11ac80, VHT0, Chain A+B
Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3189.0	58.2	---	68.2	10.0	V
10406.4	51.6	---	68.2	16.6	V
20839.9	50.4	---	74.0	23.6	V
20839.9	---	49.4	54.0	4.6	V

1 GHz - 40 GHz, 802.11ax20, HE0, Chain A
Radiated Spurious – CH36

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3394.0	58.0	---	68.2	10.2	H
10343.5	57.5	---	68.2	10.7	V
20686.5	---	46.3	54.0	7.7	V
20686.9	55.0	---	74.0	19.0	V
20720.0	51.8	---	74.0	22.2	V
20720.0	---	51.0	54.0	3.0	V

Radiated Spurious – CH40

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3383.0	58.9	---	68.2	9.3	V
10384.1	61.2	---	68.2	7.0	V
20765.8	---	44.7	54.0	9.3	V
20767.7	56.1	---	74.0	17.9	V
20799.8	51.8	---	74.0	22.2	V
20799.8	---	49.7	54.0	4.3	V

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3380.5	58.1	---	68.2	10.1	V
10462.9	61.9	---	68.2	6.3	V
20926.4	---	47.9	54.0	6.1	V
20928.2	58.6	---	74.0	15.4	V
20959.9	51.5	---	74.0	22.5	V
20959.9	---	51.3	54.0	2.7	V

1 GHz - 40 GHz, 802.11ax20, HE0, Chain B
Radiated Spurious – CH36

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3391.5	57.1	---	68.2	11.1	V
10344.0	53.6	---	68.2	14.6	H
20720.0	51.5	---	74.0	22.5	V
20720.0	---	50.6	54.0	3.4	V

Radiated Spurious – CH40

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3374.5	58.7	---	68.2	9.5	H
10384.1	54.4	---	68.2	13.8	H
20799.8	51.3	---	74.0	22.7	V
20799.8	---	50.3	54.0	3.7	V

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3373.0	58.9	---	68.2	9.3	H
10463.4	56.3	---	68.2	11.9	H
20959.9	51.0	---	74.0	23.0	V
20959.9	---	50.8	54.0	3.2	V

1 GHz - 40 GHz, 802.11ax20, HE0, Chain A+B

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3391.5	57.2	---	68.2	11.0	H
10463.4	63.3	---	68.2	4.9	V
20925.4	---	38.3	54.0	15.7	V
20926.4	50.3	---	74.0	23.7	V
20959.9	50.3	---	74.0	23.7	V
20959.9	---	49.2	54.0	4.8	V

1 GHz - 40 GHz, 802.11ax40, HE0, Chain A

Radiated Spurious – CH38F

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3399.0	58.6	---	68.2	9.6	V
10345.0	57.9	---	68.2	10.3	H
20688.4	---	48.0	54.0	6.0	V
20688.8	58.3	---	74.0	15.7	V
20700.6	51.5	---	74.0	22.5	V
20700.6	---	50.9	54.0	3.1	V
20759.7	---	41.7	54.0	12.3	V
20759.7	50.3	---	74.0	23.7	V

Radiated Spurious – CH46

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3380.5	58.4	---	68.2	9.8	H
10424.2	61.8	---	68.2	6.4	V
20847.5	57.2	---	74.0	16.8	V
20847.5	---	45.6	54.0	8.4	V
20919.8	---	49.7	54.0	4.3	V
20920.2	51.1	---	74.0	22.9	V

1 GHz - 40 GHz, 802.11ax40, HE0, Chain B

Radiated Spurious – CH38

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3390.5	58.3	---	68.2	9.9	H
10344.5	52.1	---	68.2	16.1	V
20700.6	51.5	---	74.0	22.5	V
20700.6	---	49.6	54.0	4.4	V
20759.2	---	36.6	54.0	17.4	V
20761.6	46.9	---	74.0	27.1	V

Radiated Spurious – CH46

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3393.0	58.1	---	68.2	10.1	V
10425.2	60.9	---	68.2	7.3	H
20919.8	50.9	---	74.0	23.1	V
20919.8	---	50.3	54.0	3.7	V

1 GHz - 40 GHz, 802.11ax40, HE0, Chain A+B

Radiated Spurious – CH38

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3372.5	58.5	---	68.2	9.7	H
10344.5	61.6	---	68.2	6.6	V
20687.9	---	37.8	54.0	16.2	V
20689.8	50.1	---	74.0	23.9	V
20700.6	52.1	---	74.0	21.9	V
20700.6	---	50.1	54.0	3.9	V
20759.2	47.6	---	74.0	26.4	V
20759.2	---	39.1	54.0	14.9	V

1 GHz - 40 GHz, 802.11ax80, HE0, Chain A

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
5411.3	53.1	---	74.0	20.9	H
5411.7	---	44.0	54.0	10.0	H
10345.0	61.2	---	68.2	7.0	V
20686.9	56.1	---	74.0	17.9	V
20687.9	---	46.3	54.0	7.7	V
20759.2	52.4	---	74.0	21.6	V
20759.2	---	51.6	54.0	2.4	V

1 GHz - 40 GHz, 802.11ax80, HE0, Chain B

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3388.5	58.4	---	68.2	9.8	V
10344.0	53.2	---	68.2	15.0	H
20759.2	51.5	---	74.0	22.6	V
20759.2	---	51.5	54.0	2.5	V
20839.5	49.1	---	74.0	24.9	V
20839.5	---	37.3	54.0	16.7	V

1 GHz - 40 GHz, 802.11ax80, HE0, Chain A+B

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3394.5	58.7	---	68.2	9.5	H
10344.5	61.1	---	68.2	7.1	V
20687.4	---	36.1	54.0	17.9	V
20690.2	48.0	---	74.0	26.1	V
20759.2	50.8	---	74.0	23.2	V
20759.2	---	50.3	54.0	3.7	V
20840.4	---	36.9	54.0	17.1	V
20840.9	45.9	---	74.0	28.1	H

B.3 Test Results Tables U-NII-2A

B.3.1 26dB & 99% Bandwidth

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Mode	Rate	Antenna	Channel	Freq [MHz]	26dB BW [MHz]	99% BW [MHz]	
802.11a	6Mbps	SISO A	52	5260	26.30	16.72	
			56	5280	27.30	17.04	
			64	5320	23.80	16.56	
		SISO B	52	5260	28.80	17.12	
			56	5280	25.80	16.92	
			64	5320	23.75	16.56	
802.11n20	HT0	SISO A	52	5260	26.95	17.96	
			56	5280	27.25	17.92	
			64	5320	24.10	17.64	
		SISO B	52	5260	27.50	17.96	
			56	5280	28.00	18.08	
			64	5320	24.25	17.68	
	HT8	MIMO A	52	5260	24.70	17.68	
			56	5280	24.15	17.64	
			64	5320	23.80	17.68	
		MIMO B	52	5260	23.85	17.76	
			56	5280	23.75	17.72	
			64	5320	23.85	17.72	
802.11n40	HT0	SISO A	54	5270	44.55	36.24	
			62	5310	43.47	36.24	
		SISO B	54	5270	43.92	36.16	
			62	5310	43.38	36.00	
		HT8	MIMO A	54	5270	42.75	35.92
				62	5310	42.84	36.00
	MIMO B		54	5270	41.22	36.00	
			62	5310	42.03	35.92	
	802.11ac80	VHT0	SISO A	58	5290	84.74	75.00
			SISO B			85.88	75.00
MIMO A			86.64			75.00	
MIMO B			84.74			75.00	

Max Value

Mode	Rate	Antenna	Channel	Freq [MHz]	RU config.	26dB BW [MHz]	99% BW [MHz]
802.11ax20	HE0	SISO A	52	5260	Full	25.30	18.92
			56	5280	Full	25.95	18.92
			64	5320	Full	23.35	18.88
					26/8	20.70	18.40
					52/40	21.60	18.32
					106/54	22.40	17.96
		SISO B	52	5260	Full	26.45	19.00
			56	5280	Full	26.55	19.04
			64	5320	Full	24.90	18.84
					26/8	20.85	17.92
					52/40	21.95	18.28
					106/54	22.05	18.28
		MIMO A	52	5260	Full	23.65	18.84
			56	5280	Full	23.05	18.92
			64	5320	Full	23.45	18.88
					26/8	21.00	18.32
					52/40	21.90	18.12
					106/54	22.15	18.00
		MIMO B	52	5260	Full	23.75	18.92
			56	5280	Full	23.10	18.88
			64	5320	Full	23.50	18.88
					26/8	20.65	17.56
					52/40	22.10	18.48
					106/54	20.50	18.00
802.11ax40	HE0	SISO A	54	5270	Full	43.56	37.68
			62	5310	Full	42.21	37.52
					242/62	23.04	18.72
		SISO B	54	5270	Full	42.75	37.60
			62	5310	Full	42.30	37.36
					242/62	23.13	18.80
		MIMO A	54	5270	Full	42.93	37.44
			62	5310	Full	42.21	37.52
					242/62	23.49	18.80
		MIMO B	54	5270	Full	42.48	37.60
			62	5310	Full	43.20	37.68
					242/62	24.12	18.80
802.11ax80	HE0	SISO A	58	5290	Full	83.22	76.80
					484/66	43.32	37.32
		SISO B			Full	83.22	76.68
					484/66	43.32	37.44
		MIMO A			Full	83.60	76.80
					484/66	42.94	37.44
		MIMO B			Full	83.22	76.68
					484/66	43.13	37.44

Max Value

See Section C.1.1 for the screenshot results

B.3.2 Power Limits. Maximum Output power & Maximum power spectral density

Test limits

FCC part	Limits
15.407 (a) (2)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to section E) 2) e) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables
Duty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11a	6Mbps	SISO A	97.50%
		SISO B	97.50%
802.11n20	HT0	SISO A	98.65%
		SISO B	98.65%
	HT8	MIMO A	98.65%
		MIMO B	98.65%
802.11ax20	HE0	SISO A	98.67%
		SISO B	98.67%
		MIMO A	98.67%
		MIMO B	98.67%
802.11n40	HT0	SISO A	98.74%
		SISO B	98.74%
	HT8	MIMO A	98.73%
		MIMO B	98.73%
802.11ax40	HE0	SISO A	98.86%
		SISO B	98.86%
		MIMO A	98.73%
		MIMO B	98.73%
802.11ac80	VHT0	SISO A	98.66%
		SISO B	98.66%
		MIMO A	98.60%
		MIMO B	98.60%
802.11ax80	HE0	SISO A	98.66%
		SISO B	98.66%
		MIMO A	98.67%
		MIMO B	98.67%

Maximum output power

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]	
802.11a	6Mbps	52	5260	SISO A	21.09	21.20	26.20	131.82	
				SISO B	20.97	21.08	26.08	128.23	
		56	5280	SISO A	21.28	21.39	26.39	137.72	
				SISO B	20.82	20.93	25.93	123.88	
		64	5320	SISO A	17.49	17.60	22.60	57.54	
				SISO B	17.39	17.50	22.50	56.23	
802.11n20	HT0	52	5260	SISO A	21.11	21.11	26.11	129.12	
				SISO B	20.92	20.92	25.92	123.59	
		56	5280	SISO A	21.17	21.17	26.17	130.92	
				SISO B	21.01	21.01	26.01	126.18	
		64	5320	SISO A	17.75	17.75	22.75	59.57	
				SISO B	17.52	17.52	22.52	56.49	
	HT8	52	5260	MIMO A	17.49	17.49	22.49	56.10	
				MIMO B	17.35	17.35	22.35	54.33	
				Combined A+B	20.43	20.43	25.43	110.43	
		56	5280	MIMO A	17.53	17.53	22.53	56.62	
				MIMO B	17.49	17.49	22.49	56.10	
		Combined A+B	20.52	20.52	25.52	112.73			
	64	5320	MIMO A	13.63	13.63	18.63	23.07		
			MIMO B	13.54	13.54	18.54	22.59		
			Combined A+B	16.60	16.60	21.60	45.66		
	802.11n40	HT0	54	5270	SISO A	20.23	20.23	25.23	105.44
					SISO B	18.75	18.75	23.75	74.99
			62	5310	SISO A	16.60	16.60	21.60	45.71
SISO B					16.55	16.55	21.55	45.19	
HT8		54	5270	MIMO A	16.72	16.72	21.72	46.99	
				MIMO B	16.39	16.39	21.39	43.55	
				Combined A+B	19.57	19.57	24.57	90.54	
		62	5310	MIMO A	13.07	13.07	18.07	20.28	
				MIMO B	13.20	13.20	18.20	20.89	
				Combined A+B	16.15	16.15	21.15	41.17	
802.11ac80	VHT0	58	5290	SISO A	17.59	17.59	22.59	57.41	
				SISO B	17.48	17.48	22.48	55.98	
				MIMO A	14.08	14.08	19.08	25.59	
				MIMO B	13.72	13.72	18.72	23.55	
				Combined A+B	16.91	16.91	21.91	49.09	

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max* EIRP [dBm]	Avg Max* Conducted Power [mW]		
802.11ax20	HE0	52	5260	SISO A	Full	20.89	20.89	25.89	122.74		
				SISO B	Full	20.90	20.90	25.90	123.03		
				MIMO A	Full	17.51	17.51	22.51	56.36		
				MIMO B	Full	17.44	17.44	22.44	55.46		
						Combined A+B	Full	20.49	20.49	25.49	111.83
		56	5280	SISO A	Full	21.01	21.01	26.01	126.18		
				SISO B	Full	20.97	20.97	25.97	125.03		
				MIMO A	Full	17.66	17.66	22.66	58.34		
				MIMO B	Full	17.33	17.33	22.33	54.08		
						Combined A+B	Full	20.51	20.51	25.51	112.42
		64	5320	SISO A	Full	17.45	17.45	22.45	55.59		
					26/8	13.76	13.76	18.76	23.77		
					52/40	15.17	15.17	20.17	32.89		
					106/54	19.06	19.06	24.06	80.54		
				SISO B	Full	17.39	17.39	22.39	54.83		
					26/8	13.72	13.72	18.72	23.55		
					52/40	15.76	15.76	20.76	37.67		
					106/54	19.48	19.48	24.48	88.72		
				MIMO A	Full	13.70	13.70	18.70	23.44		
					26/8	10.63	10.63	15.63	11.56		
					52/40	13.41	13.41	18.41	21.93		
					106/54	16.75	16.75	21.75	47.32		
				MIMO B	Full	13.52	13.52	18.52	22.49		
					26/8	10.56	10.56	15.56	11.38		
					52/40	13.31	13.31	18.31	21.43		
					106/54	16.58	16.58	21.58	45.50		
		Combined A+B	Full	16.62	16.62	21.62	45.93				
			26/8	13.61	13.61	18.61	22.94				
52/40	16.37		16.37	21.37	43.36						
106/54	19.68		19.68	24.68	92.81						
802.11ax40	HE0	54	5270	SISO A	Full	20.22	20.22	25.22	105.20		
				SISO B	Full	18.97	18.97	23.97	78.89		
				MIMO A	Full	16.69	16.69	21.69	46.67		
				MIMO B	Full	16.42	16.42	21.42	43.85		
				Combined A+B	Full	19.57	19.57	24.57	90.52		
		62	5310	SISO A	242/62	16.52	16.52	21.52	44.87		
				SISO A	242/62	17.59	17.59	22.59	57.41		
				SISO B	242/62	16.46	16.46	21.46	44.26		
				SISO B	242/62	17.47	17.47	22.47	55.85		
				MIMO A	242/62	13.31	13.31	18.31	21.43		
				MIMO A	242/62	13.66	13.66	18.66	23.23		
				MIMO B	242/62	13.04	13.04	18.04	20.14		
				MIMO B	242/62	13.57	13.57	18.57	22.75		
				Combined A+B	242/62	16.19	16.19	21.19	41.57		
Combined A+B	242/62	16.63	16.63	21.63	45.98						
802.11ax80	HE0	58	5290	SISO A	Full	17.43	17.43	22.43	55.34		
					484/66	15.38	15.38	20.38	34.51		
				SISO B	Full	16.86	16.86	21.86	48.53		
					484/66	16.62	16.62	21.62	45.92		
				MIMO A	Full	13.97	13.97	18.97	24.95		
					484/66	12.94	12.94	17.94	19.68		
				MIMO B	Full	14.11	14.11	19.11	25.76		
					484/66	12.73	12.73	17.73	18.75		
				Combined A+B	Full	17.05	17.05	22.05	50.71		
				Combined A+B	484/66	15.85	15.85	20.85	38.43		

Maximum Power Spectral Density (PSD)

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]	
802.11a	6Mbps	52	5260	SISO A	10.29	10.40	
				SISO B	10.16	10.27	
		56	5280	SISO A	10.46	10.57	
				SISO B	10.02	10.13	
		64	5320	SISO A	6.69	6.80	
				SISO B	6.58	6.69	
802.11n20	HT0	52	5260	SISO A	10.10	10.10	
				SISO B	9.92	9.92	
		56	5280	SISO A	10.17	10.17	
				SISO B	10.00	10.00	
		64	5320	SISO A	6.75	6.75	
				SISO B	6.53	6.53	
	HT8	52	5260	MIMO A	6.50	6.50	
				MIMO B	6.39	6.39	
				Combined A+B	9.46	9.46	
		56	5280	MIMO A	6.54	6.54	
				MIMO B	6.50	6.50	
				Combined A+B	9.53	9.53	
	64	5320	MIMO A	2.68	2.68		
			MIMO B	2.65	2.65		
			Combined A+B	5.68	5.68		
	802.11n40	HT0	54	5270	SISO A	5.77	5.77
					SISO B	4.29	4.29
			62	5310	SISO A	2.13	2.13
SISO B					2.09	2.09	
HT8		54	5270	MIMO A	2.27	2.27	
				MIMO B	1.92	1.92	
				Combined A+B	5.11	5.11	
		62	5310	MIMO A	-1.35	-1.35	
				MIMO B	-1.25	-1.25	
				Combined A+B	1.71	1.71	
				SISO A	0.07	0.07	
				SISO B	-0.05	-0.05	
802.11ac80	VHT0	58	5290	MIMO A	-3.41	-3.41	
				MIMO B	-3.75	-3.75	
				Combined A+B	-0.57	-0.57	
				SISO A	0.07	0.07	

* Maximum values are the duty cycle compensated values calculated from the measured average values

Mode	Rate	#Ch	Freq [MHz]	Antenna	RU config.	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11ax20	HE0	52	5260	SISO A	Full	9.70	9.70
				SISO B	Full	9.72	9.72
				MIMO A	Full	6.30	6.30
				MIMO B	Full	6.30	6.30
				Combined A+B	Full	9.31	9.31
		56	5280	SISO A	Full	9.82	9.82
				SISO B	Full	9.77	9.77
				MIMO A	Full	6.46	6.46
				MIMO B	Full	6.17	6.17
				Combined A+B	Full	9.33	9.33
		64	5320	SISO A	Full	6.24	6.24
					26/8	10.93	10.93
					52/40	9.43	9.43
				SISO B	Full	6.20	6.20
					26/8	10.88	10.88
					52/40	10.01	10.01
				MIMO A	Full	2.49	2.49
					26/8	7.83	7.83
					52/40	7.67	7.67
				MIMO B	Full	7.92	7.92
					26/8	2.32	2.32
					52/40	7.73	7.73
				Combined A+B	Full	7.55	7.55
					26/8	7.81	7.81
52/40	5.42	5.42					
106/54	10.79	10.79					
802.11ax40	HE0	54	5270	SISO A	Full	5.59	5.59
				SISO B	Full	4.36	4.36
				MIMO A	Full	2.05	2.05
				MIMO B	Full	1.78	1.78
				Combined A+B	Full	4.93	4.93
		62	5310	SISO A	Full	1.88	1.88
					242/62	6.28	6.28
				SISO B	Full	1.83	1.83
					242/62	6.16	6.16
				MIMO A	Full	-1.22	-1.22
					242/62	2.44	2.44
				MIMO B	Full	-1.55	-1.55
					242/62	2.25	2.25
				Combined A+B	Full	1.63	1.63
242/62	5.36	5.36					
802.11ax80	HE0	58	5290	SISO A	Full	-0.18	-0.18
					484/66	0.80	0.80
				SISO B	Full	-0.75	-0.75
					484/66	2.04	2.04
				MIMO A	Full	-3.62	-3.62
					484/66	-1.56	-1.56
				MIMO B	Full	-3.48	-3.48
					484/66	-1.85	-1.85
				Combined A+B	Full	-0.54	-0.54
					484/66	1.31	1.31

* Maximum values are the duty cycle compensated values calculated from the measured average values

See Section C.1.2 for the screenshot results

B.3.3 Undesirable emissions limits : out of band (Conducted)

Test limits

FCC part	Limits																				
15.407 (b) (2)	For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th style="background-color: #d9e1f2;">Freq Range (MHz)</th> <th style="background-color: #d9e1f2;">Field Strength (μV/m)</th> <th style="background-color: #d9e1f2;">Field Strength (dBμV/m)</th> <th style="background-color: #d9e1f2;">Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td>30-88</td> <td>100</td> <td>40</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>43.5</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>46</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>54</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

Both lower and upper side of the out of band were performed using the integration method as defined in the out of band measurements section (paragraph II.G.3.d) of 789033 D02 v02r01.

In case of out of band measurements falling in restricted bands, the declared antenna gain is also compensated in the graph.

For out of band measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBμV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
960-25000	3	500	53.98	-41.2

See Section C.1.3 for the screenshot results.

B.3.4 Radiated spurious emission

Standard references

FCC part	Limits																				
15.407 (a) (2)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" data-bbox="541 629 1331 840"> <thead> <tr> <th data-bbox="547 638 740 698">Freq Range (MHz)</th> <th data-bbox="740 638 933 698">Field Strength (µV/m)</th> <th data-bbox="933 638 1126 698">Field Strength (dBµV/m)</th> <th data-bbox="1126 638 1324 698">Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td data-bbox="547 698 740 730">30-88</td> <td data-bbox="740 698 933 730">100</td> <td data-bbox="933 698 1126 730">40</td> <td data-bbox="1126 698 1324 730">3</td> </tr> <tr> <td data-bbox="547 730 740 761">88-216</td> <td data-bbox="740 730 933 761">150</td> <td data-bbox="933 730 1126 761">43.5</td> <td data-bbox="1126 730 1324 761">3</td> </tr> <tr> <td data-bbox="547 761 740 792">216-960</td> <td data-bbox="740 761 933 792">200</td> <td data-bbox="933 761 1126 792">46</td> <td data-bbox="1126 761 1324 792">3</td> </tr> <tr> <td data-bbox="547 792 740 840">Above 960</td> <td data-bbox="740 792 933 840">500</td> <td data-bbox="933 792 1126 840">54</td> <td data-bbox="1126 792 1324 840">3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The radiated setups shown in section *Test & System Description* were used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the section B.2.2 and using the low, middle and high channels.

For 802.11ax20, 802.11ax40 and 802.11ax80 modes the worst case in terms of spurious emissions found among the low, mid and high channels tested on chain A and B separately is used to perform the test in MIMO mode (Chain A+B).

For 802.11n20, 802.11n40 and 802.11ac80 modes the worst case in terms of spurious emissions found among the low, mid and high channels tested on 802.11ax20, 802.11ax40 and 802.11ax80 is used to perform the test in chain A, B ,and A+B modes.

Test Results

Radiated spurious - 30 MHz to 1 GHz

Frequency	Quasi-Peak	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dB	---
47.8	36.0	68.2	32.2	V
50.4	34.8	68.2	33.4	V

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A

Radiated Spurious – CH52

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3249.0	59.5	---	68.2	8.8	H
10522.4	51.1	---	68.2	17.1	H
21039.7	---	39.8	54.0	14.2	V
21039.7	48.7	---	74.0	25.3	V

Radiated Spurious – CH56

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3209.5	59.8	---	68.2	8.4	H
10553.3	51.8	---	68.2	16.4	H
21120.0	50.8	---	74.0	23.2	V
21120.0	---	42.9	54.0	11.1	V
26401.3	50.7	---	68.2	17.5	H
31680.1	48.8	---	74.0	25.2	V
31680.1	---	40.9	54.0	13.1	H

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3313.0	60.0	---	68.2	8.2	V
10637.4	---	36.7	54.0	17.3	H
10637.9	47.6	---	74.0	26.4	H
21274.4	47.8	---	74.0	26.2	H
21280.5	---	37.6	54.0	16.4	V

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain B
Radiated Spurious – CH52

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3371.0	59.6	---	68.2	8.6	V
10516.1	51.2	---	68.2	17.0	H
21039.7	51.6	---	74.0	22.4	V
21040.2	---	51.1	54.0	2.9	V

Radiated Spurious – CH56

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3164.0	59.4	---	68.2	8.8	H
10564.9	54.4	---	68.2	13.8	H
21120.0	51.1	---	74.0	22.9	V
21120.0	---	51.2	54.0	2.8	V

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3375.0	60.4	---	68.2	7.8	H
10640.3	57.1	---	74.0	16.9	H
10641.7	---	47.6	54.0	6.4	H
21280.1	51.0	---	74.0	23.0	V
21280.1	---	50.3	54.0	3.7	V

1 GHz – 40 GHz, 802.11n20, HT0, Chain A

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3375.5	59.6	---	68.2	8.6	H
10640.3	---	40.9	54.0	13.1	V
10640.3	50.0	---	74.0	24.0	V
21279.1	57.7	---	74.0	16.3	V
21280.1	---	48.0	54.0	6.0	V

1 GHz – 40 GHz, 802.11n20, HT0, Chain B

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3379.5	60.2	---	68.2	8.0	V
10641.2	47.3	---	74.0	26.7	H
10641.2	---	39.1	54.0	14.9	H
21280.1	51.1	---	74.0	22.9	V
21280.1	---	50.3	54.0	3.7	V

1 GHz – 40 GHz, 802.11n20, HT8, Chain A+B

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3378.0	59.0	---	68.2	9.2	H
10639.8	54.5	---	74.0	19.5	H
10639.8	---	48.0	54.0	6.0	H
21280.1	---	47.5	54.0	6.5	V
21280.5	51.6	---	74.0	22.4	V

1 GHz – 40 GHz, 802.11n40, HT0, Chain A

Radiated Spurious – CH62

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3377.5	59.3	---	68.2	8.9	H
10620.0	52.9	---	74.0	21.1	V
10621.4	---	40.2	54.0	13.8	V
21232.8	54.7	---	74.0	19.3	V
21239.9	---	47.5	54.0	6.5	V

1 GHz – 40 GHz, 802.11n40, HT0, Chain B

Radiated Spurious – CH62

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3398.5	59.8	---	68.2	8.4	V
10621.0	---	44.7	54.0	9.3	H
10637.4	53.8	---	74.0	20.2	H
21239.9	50.5	---	74.0	23.5	V
21239.9	---	48.1	54.0	5.9	V

1 GHz – 40 GHz, 802.11n40, HT8, Chain A+B

Radiated Spurious – CH62

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3382.0	59.2	---	68.2	9.0	V
10623.4	52.4	---	74.0	21.6	H
10623.4	---	43.4	54.0	10.6	H
21239.9	50.5	---	74.0	23.5	V
21239.9	---	48.3	54.0	5.7	V

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3204.0	59.0	---	68.2	9.2	V
10562.5	49.6	---	68.2	18.6	V
21159.6	57.1	---	74.0	16.9	V
21160.1	---	48.3	54.0	5.7	V

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain B

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3290.5	59.4	---	68.2	8.8	V
10586.6	51.4	---	68.2	16.8	H
21159.6	50.7	---	74.0	23.3	V
21160.1	---	50.8	54.0	3.2	V

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A+B

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3292.5	59.0	---	68.2	9.2	H
10607.4	47.8	---	74.0	26.2	V
10607.4	---	39.2	54.0	14.8	H
21159.6	50.4	---	74.0	23.6	V
21160.1	---	48.6	54.0	5.4	V

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A

Radiated Spurious – CH52

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3367.5	59.9	---	68.2	8.3	V
10503.5	53.8	---	68.2	14.4	H
21005.7	---	49.5	54.0	4.5	V
21007.1	59.6	---	74.0	14.4	V
26254.9	50.7	---	68.2	17.5	H

Radiated Spurious – CH56

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3117.5	59.5	---	68.2	8.7	H
10542.6	51.2	---	68.2	17.0	V
21086.4	---	49.4	54.0	4.6	V
21087.4	59.3	---	74.0	14.7	V
21120.0	51.5	---	74.0	22.5	V
21120.0	---	51.1	54.0	2.9	V

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3301.0	60.0	---	68.2	8.2	H
10622.9	53.8	---	74.0	20.2	H
10622.9	---	45.3	54.0	8.7	H
21245.6	---	51.8	54.0	2.2	V
21247.5	62.4	---	74.0	11.6	V
21280.1	---	49.5	54.0	4.5	V
21280.5	52.4	---	74.0	21.6	V
21295.2	51.5	---	74.0	22.6	V
21295.2	---	36.7	54.0	17.3	V
26558.3	50.6	---	68.2	17.6	V

1 GHz – 40 GHz, 802.11ax20, HE0, Chain B
Radiated Spurious – CH52

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3369.5	60.2	---	68.2	8.0	V
10503.0	57.4	---	68.2	10.8	H
21039.7	52.1	---	74.0	21.9	V
21039.7	---	50.8	54.0	3.2	V

Radiated Spurious – CH56

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3163.5	60.5	---	68.2	7.7	V
10543.1	60.3	---	68.2	7.9	H
21120.0	51.1	---	74.0	22.9	V
21120.0	---	51.7	54.0	2.3	V

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3251.0	60.4	---	68.2	7.8	V
10623.4	---	41.1	54.0	12.9	H
10623.9	51.4	---	74.0	22.6	H
21280.1	50.9	---	74.0	23.1	V
21280.1	---	50.2	54.0	3.8	V

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A+B

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3386.0	58.4	---	68.2	9.8	V
10622.9	50.2	---	74.0	23.8	H
10623.4	---	40.3	54.0	13.7	H
21246.5	52.6	---	74.0	21.4	V
21246.5	---	41.3	54.0	12.7	V
21279.6	49.2	---	74.0	24.8	V
21280.1	---	43.9	54.0	10.1	V

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A

Radiated Spurious – CH54

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3139.0	58.7	---	68.2	9.5	H
10504.5	54.0	---	68.2	14.2	H
21008.1	---	50.8	54.0	3.2	V
21009.9	59.8	---	74.0	14.2	V
21079.8	52.4	---	74.0	21.6	V
21079.8	---	50.9	54.0	3.1	V

Radiated Spurious – CH62

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3312.0	58.7	---	68.2	9.5	V
10583.7	60.0	---	68.2	8.2	V
21167.7	---	50.7	54.0	3.3	V
21170.0	60.5	---	74.0	13.5	V
21180.4	50.6	---	74.0	23.4	V
21180.9	---	50.2	54.0	3.8	V
21202.1	---	37.7	54.0	16.3	V
21202.1	50.9	---	74.0	23.1	V
21239.9	51.6	---	74.0	22.4	V
21239.9	---	42.5	54.0	11.6	V

1 GHz – 40 GHz, 802.11ax40, HE0, Chain B

Radiated Spurious – CH54

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3138.0	59.6	---	68.2	8.6	H
10504.0	57.2	---	68.2	11.0	H
21079.8	51.6	---	74.0	22.4	V
21079.8	---	49.8	54.0	4.2	V

Radiated Spurious – CH62

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB	---
3129.5	59.9	---	68.2	8.3	V
17501.7	53.5	---	68.2	14.7	V
21180.9	51.0	---	74.0	23.0	V
21180.9	---	51.0	54.0	3.0	V

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A+B

Radiated Spurious – CH62

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3373.5	58.0	---	68.2	10.2	H
17422.9	52.8	---	68.2	15.4	V
21167.7	---	39.9	54.0	14.1	V
21168.1	50.4	---	74.0	23.6	V
21180.4	50.8	---	74.0	23.2	V
21180.9	---	47.1	54.0	6.9	V
21239.9	---	38.9	54.0	15.1	V
21239.9	49.3	---	74.0	24.7	V

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3093.0	60.4	---	68.2	7.8	V
10503.0	53.3	---	68.2	14.9	H
21007.6	---	48.2	54.0	5.8	V
21009.9	59.5	---	74.0	14.6	V
21079.4	51.0	---	74.0	23.1	V
21079.4	---	50.9	54.0	3.1	V
21160.6	---	39.1	54.0	14.9	V
21160.6	50.0	---	74.0	23.9	V
26260.1	51.3	---	68.2	16.9	V

1 GHz – 40 GHz, 802.11ax80, HE0, Chain B

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3196.0	60.3	---	68.2	7.9	H
10504.5	57.1	---	68.2	11.1	H
21078.9	52.1	---	74.0	21.9	V
21078.9	---	50.9	54.0	3.1	V
21156.8	46.9	---	74.0	27.1	V
21160.6	---	37.7	54.0	16.3	V

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A+B


Radiated Spurious – CH58





Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3131.5	59.2	---	68.2	9.0	V
17839.0	---	41.2	54.0	12.8	V
17839.0	53.8	---	74.0	20.2	V
21008.1	---	38.1	54.0	15.9	V
21008.1	49.3	---	74.0	24.7	V
21078.9	49.7	---	74.0	24.3	V
21078.9	---	48.9	54.0	5.1	V
21159.6	49.0	---	74.0	25.0	V
21159.6	---	39.8	54.0	14.2	V

Annex C. System Plots

C.1.1 26dB and 99% bandwidth







U-NII-1

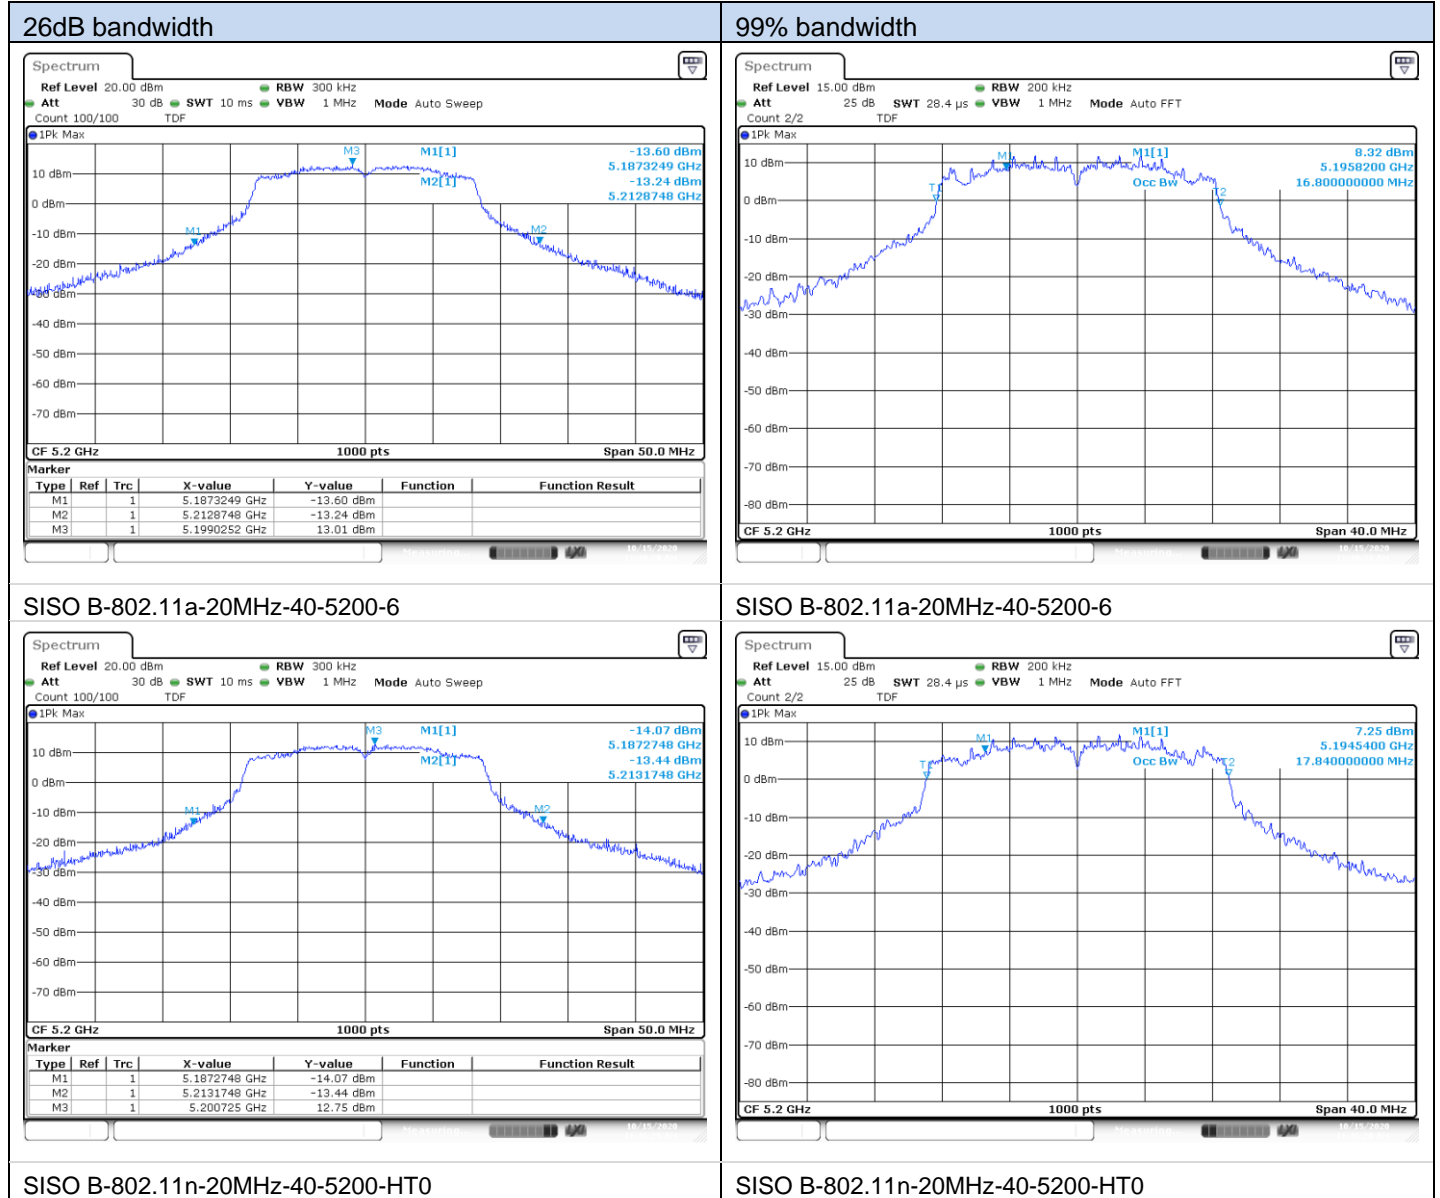

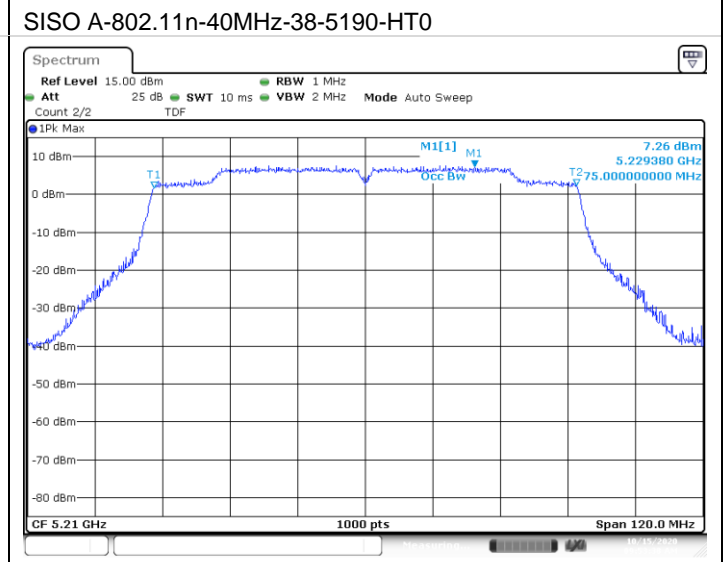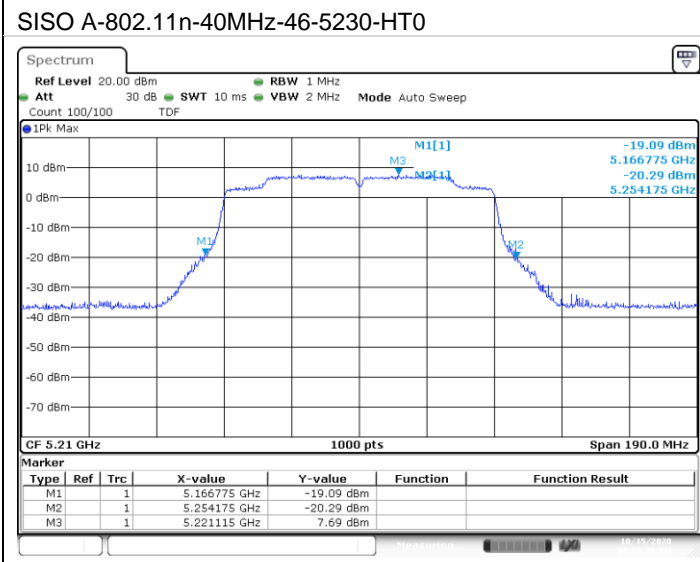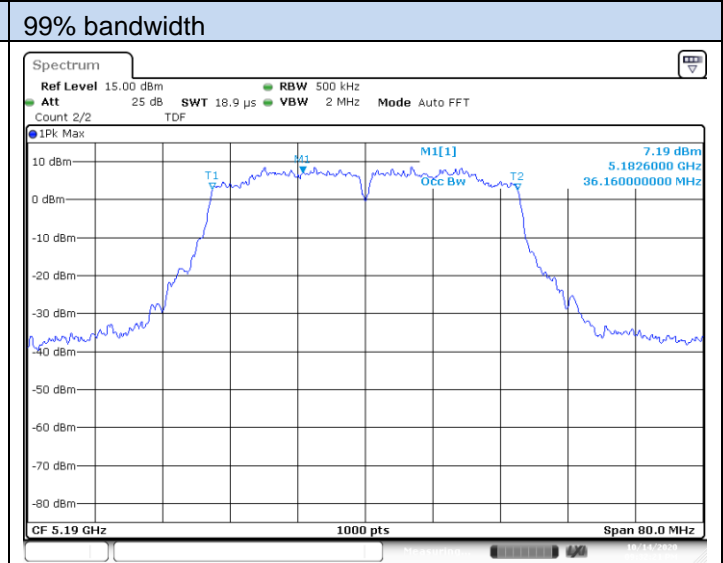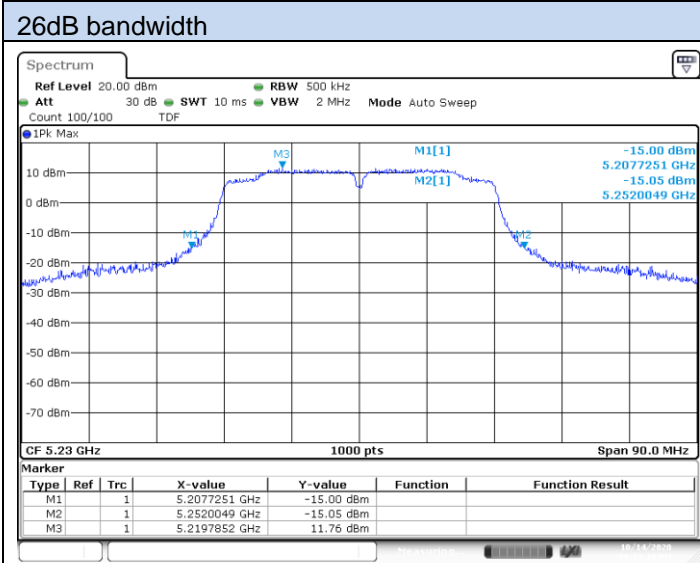

MIMO A-802.11ac-80MHz-42-5210-VHT0


MIMO A-802.11ac-80MHz-42-5210-VHT0

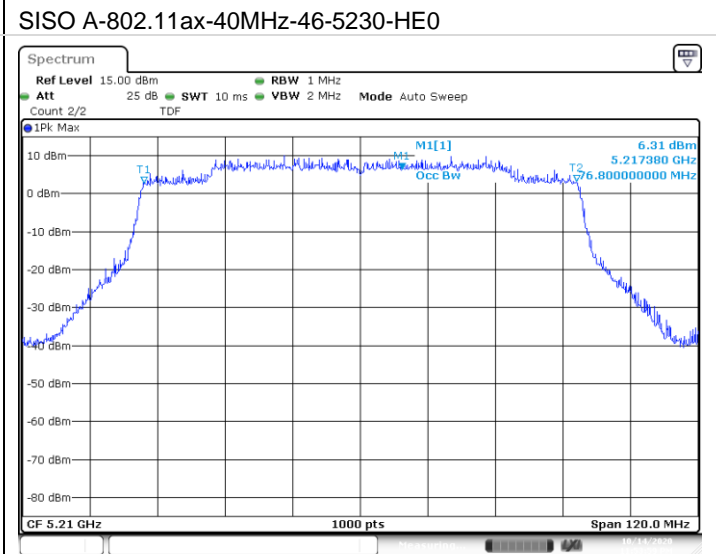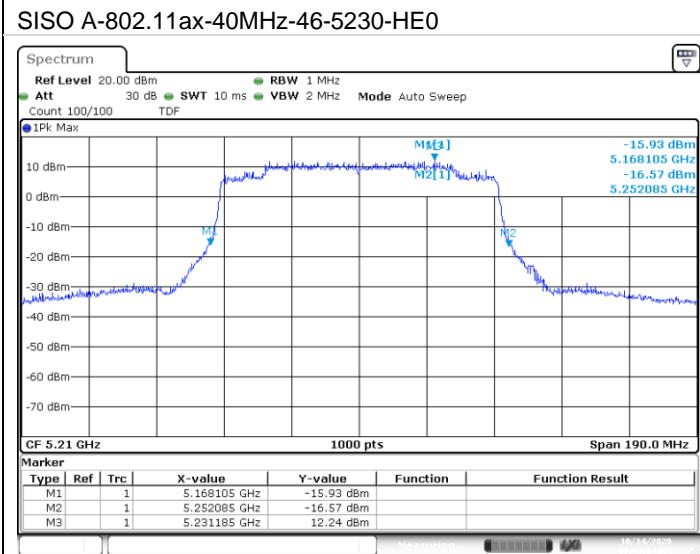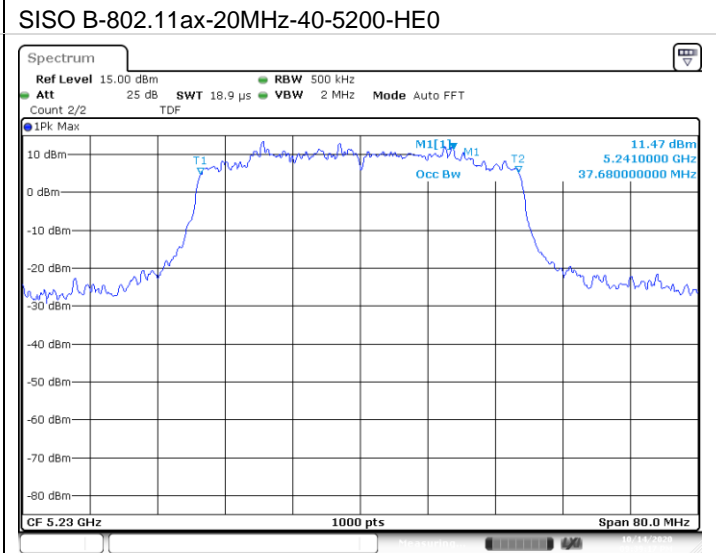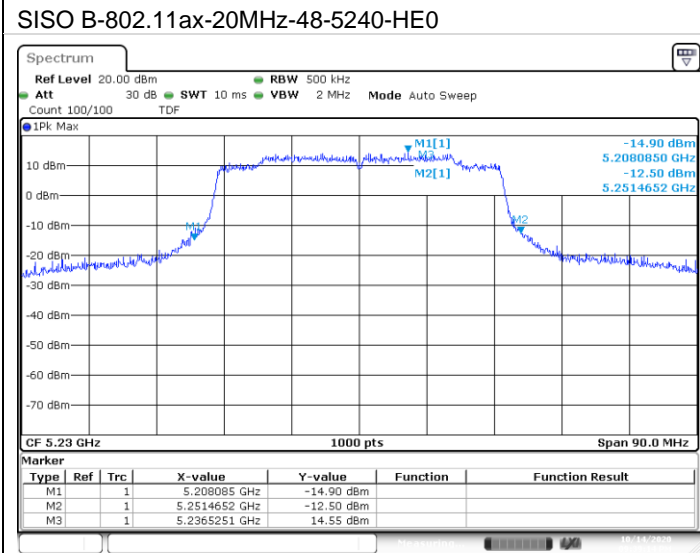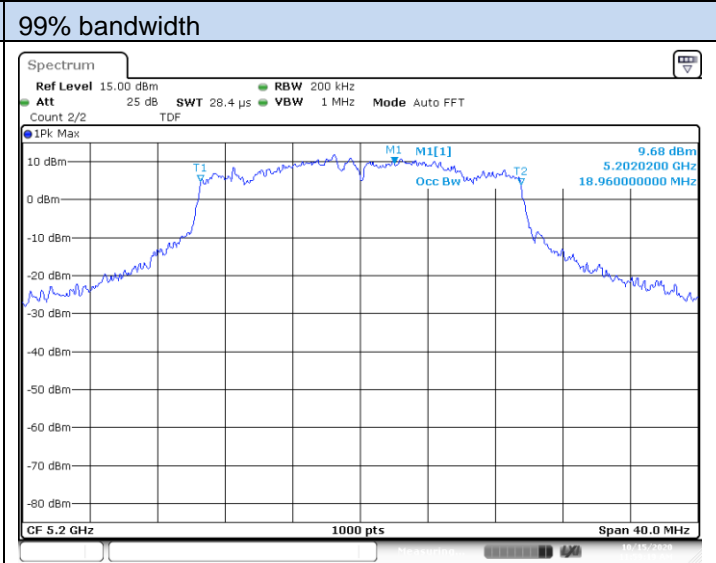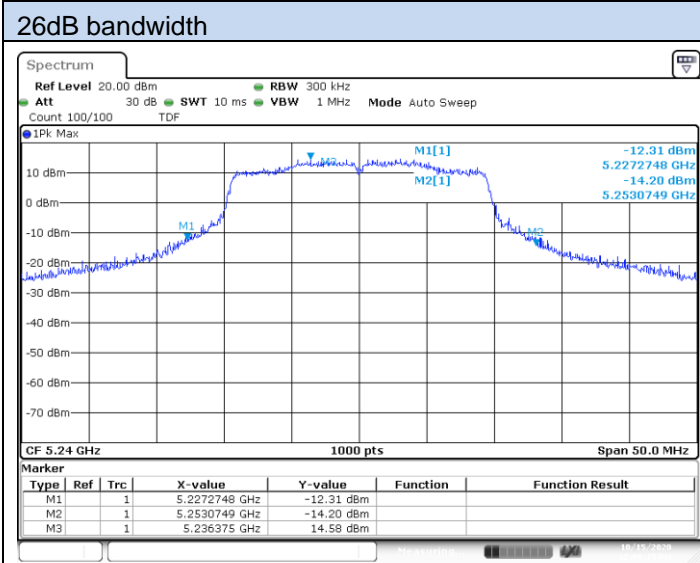


SISO A-802.11ax-80MHz-42-5210-HE0

MIMO A-802.11ax-80MHz-42-5210-HE0


U-NII-2A

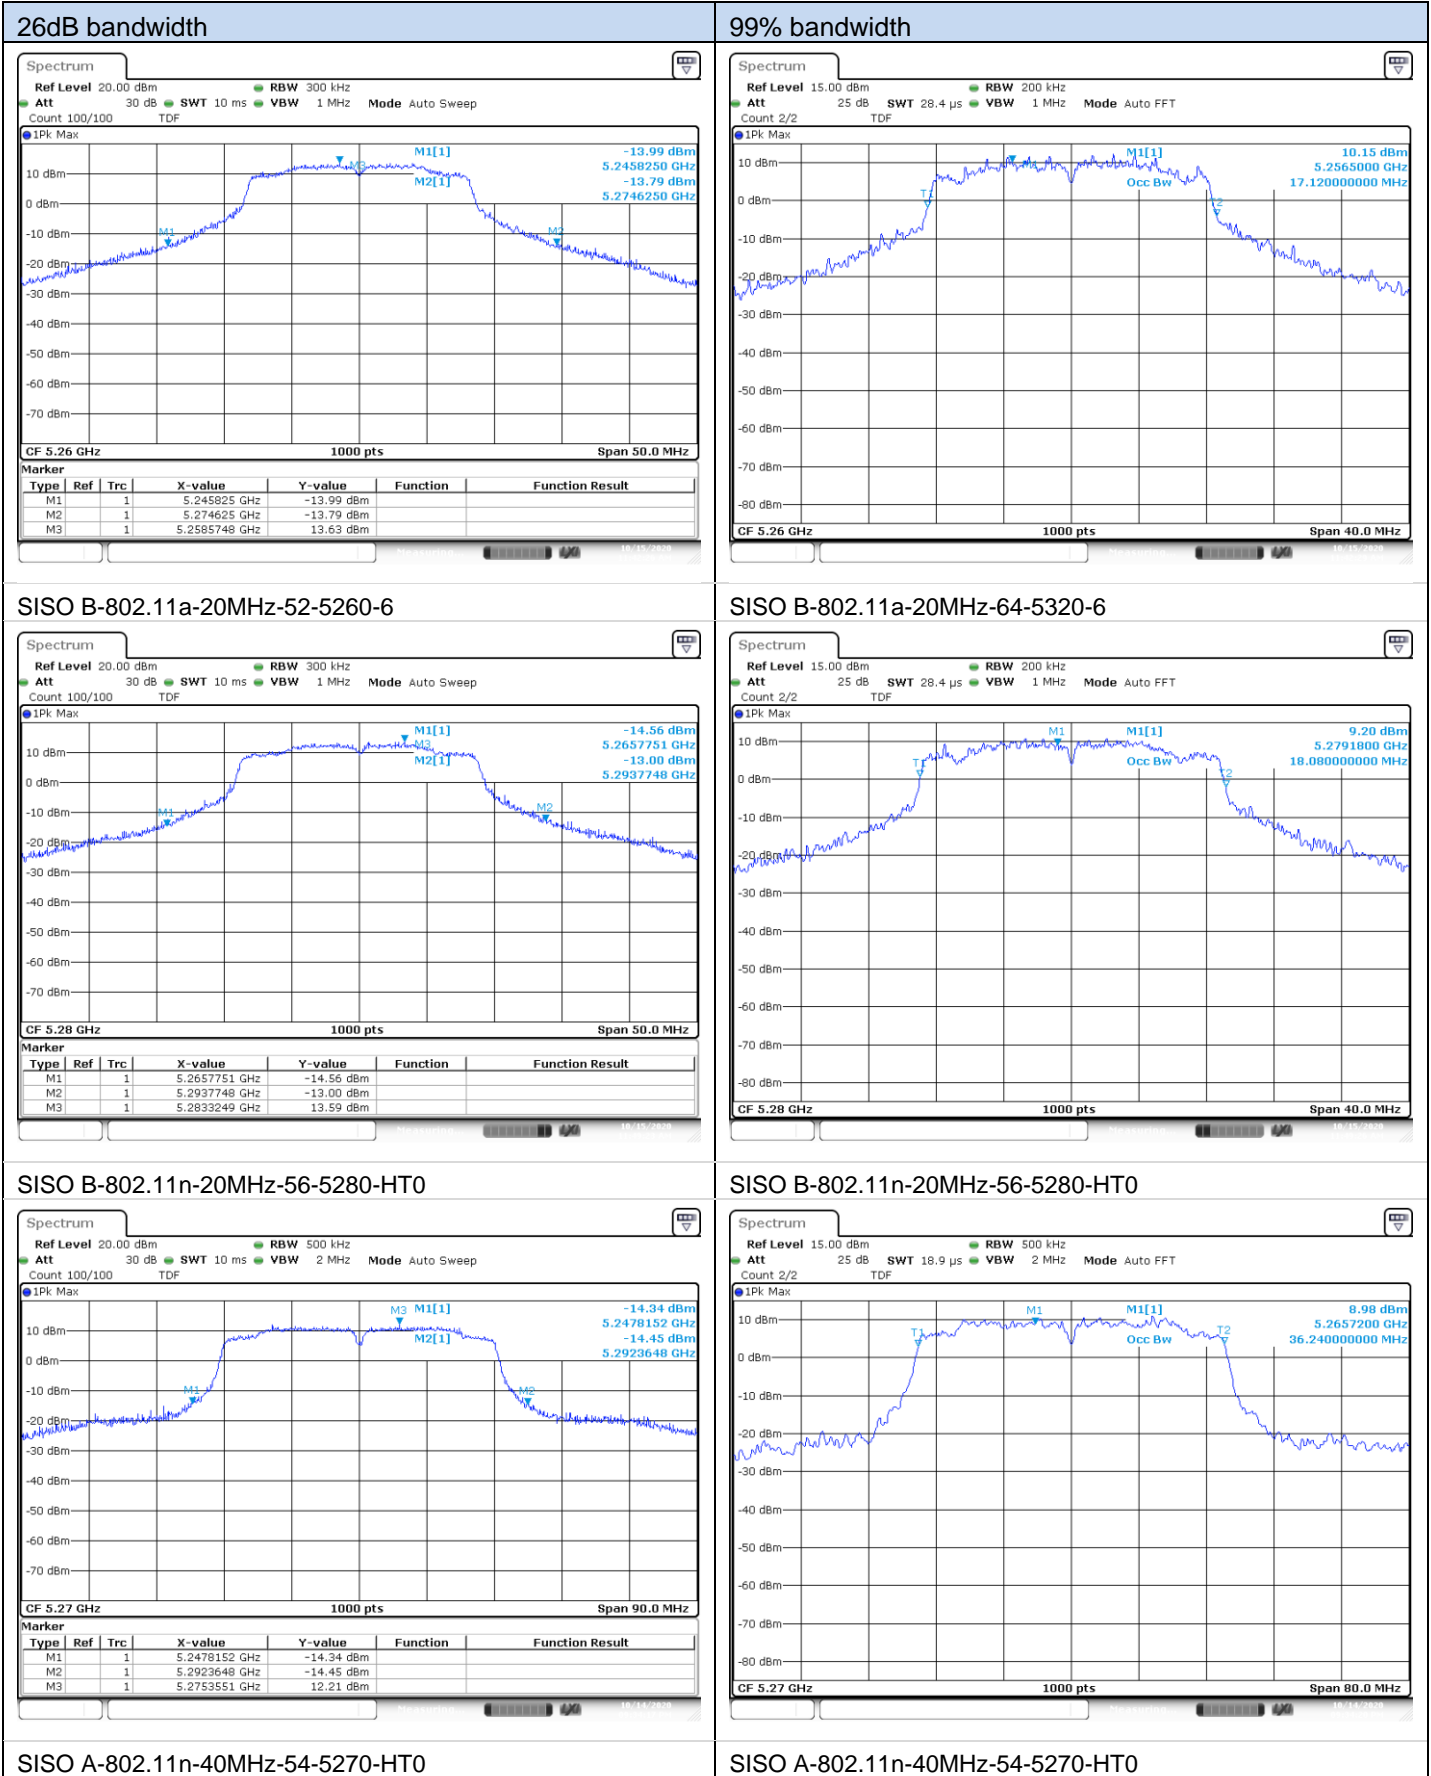


26dB bandwidth

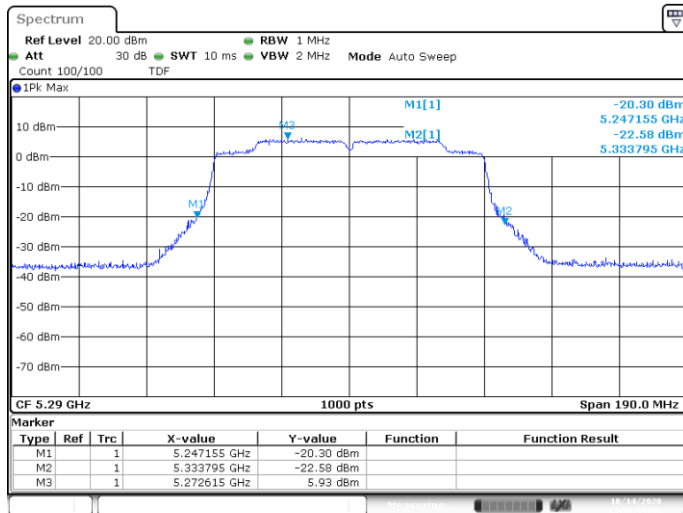


99% bandwidth

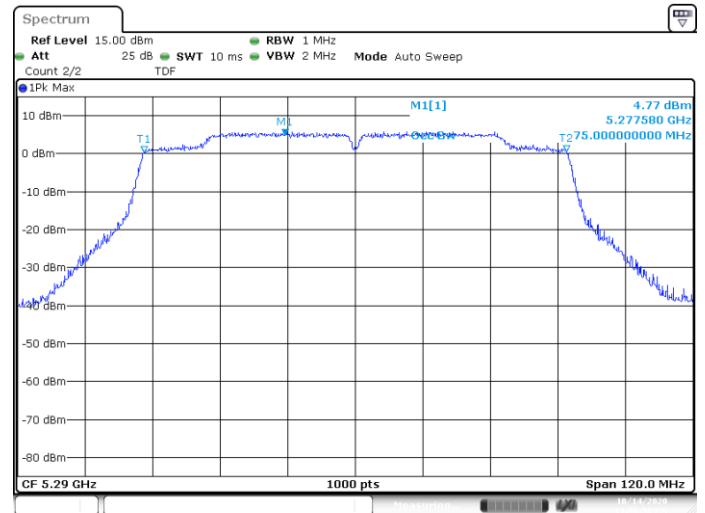


MIMO A-802.11ac-80MHz-58-5290-VHT0

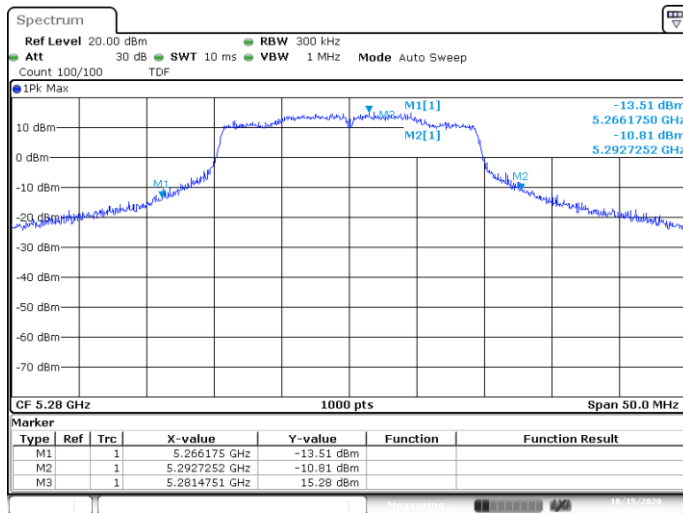


MIMO A-802.11ac-80MHz-58-5290-VHT0

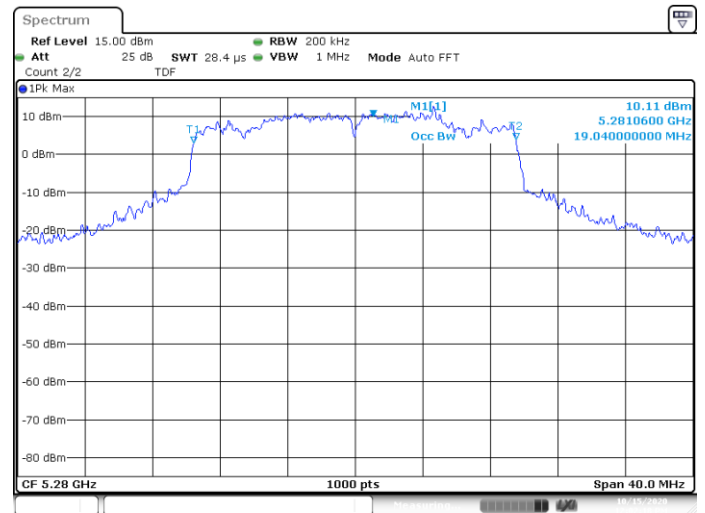

SISO B-802.11ax-20MHz-56-5280-HE0

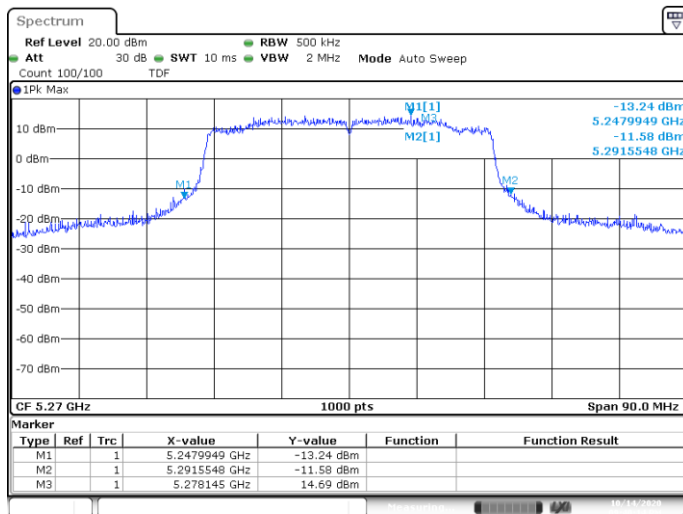


SISO B-802.11ax-20MHz-56-5280-HE0

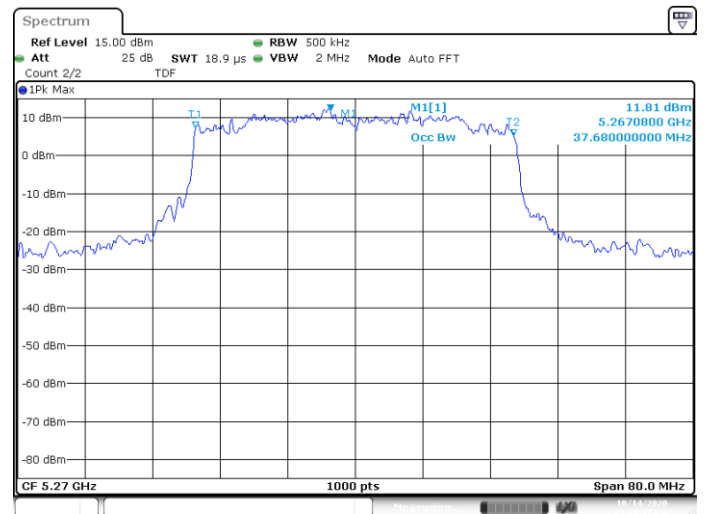


SISO A-802.11ax-40MHz-54-5270-HE0

SISO A-802.11ax-40MHz-54-5270-HE0


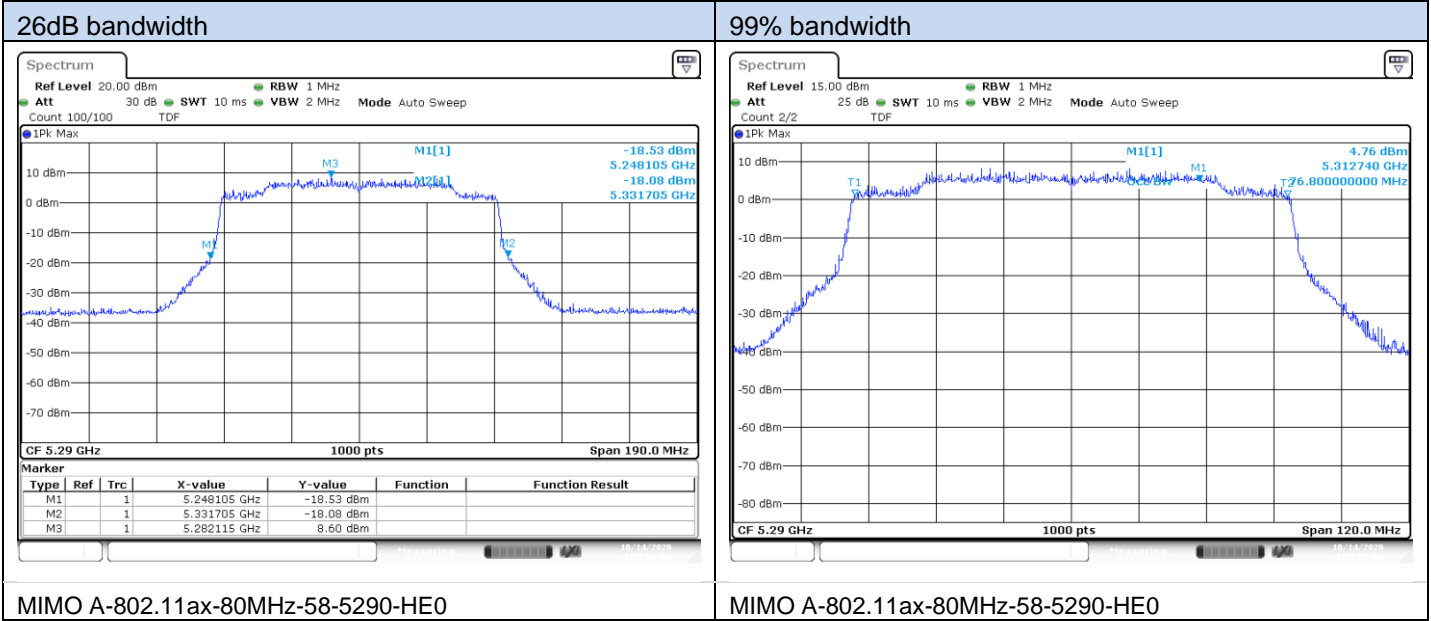


C.1.2 Maximum output power


U-NII-1

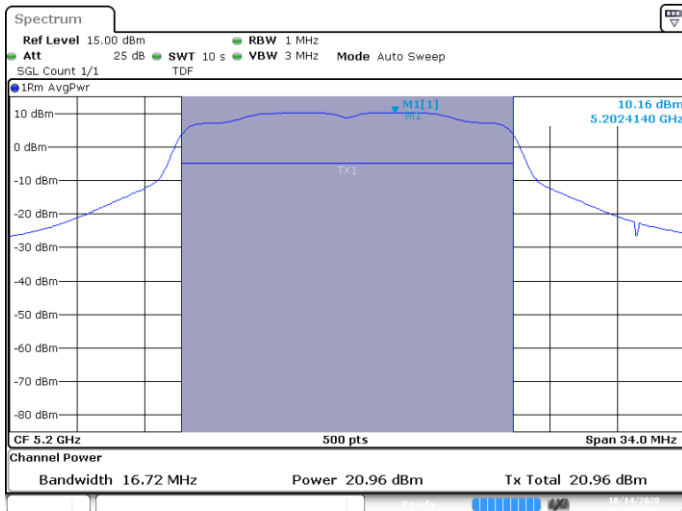

SISO A-802.11a-20MHz-Ch40-5200MHz-6

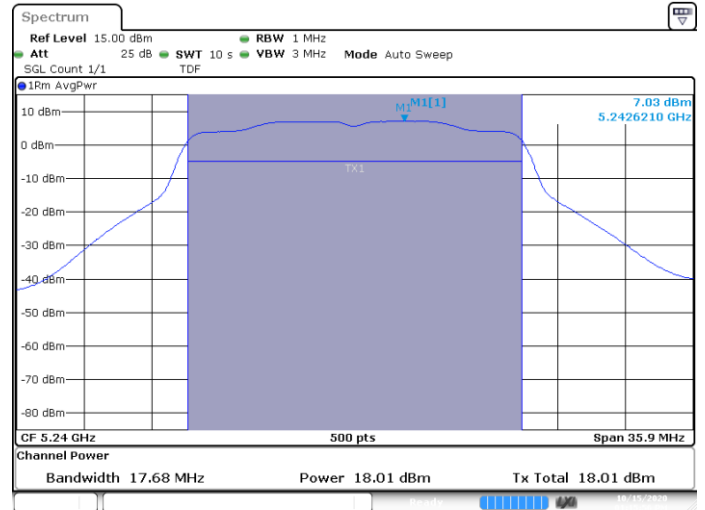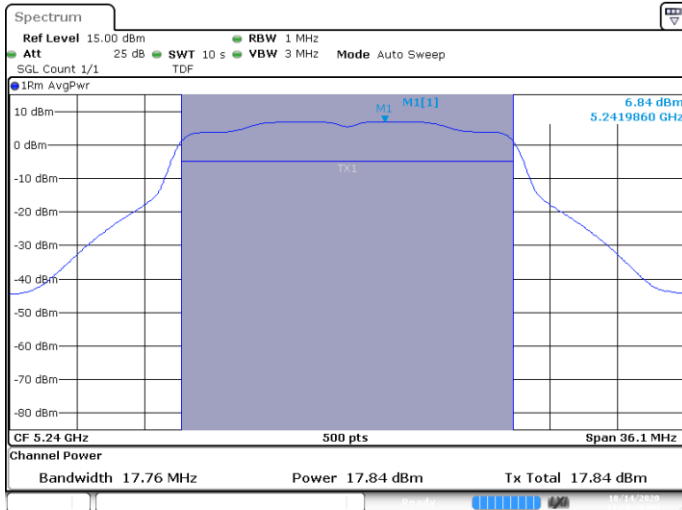


MIMO A-802.11n-20MHz-Ch48-5240MHz-HT8

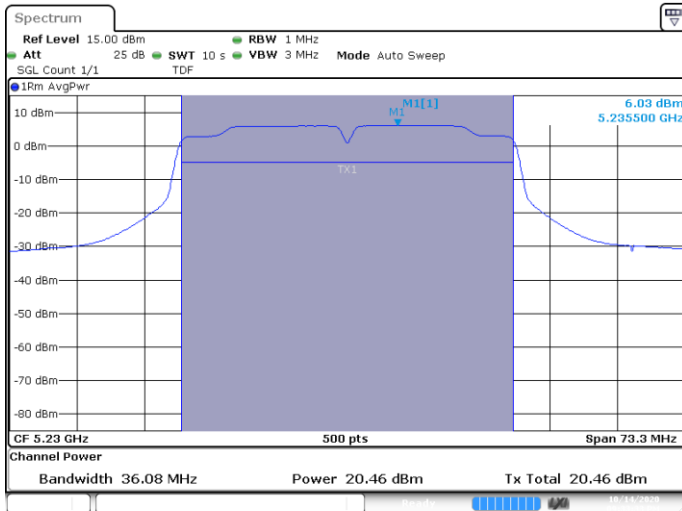


MIMO B-802.11n-20MHz-Ch48-5240MHz-HT8


SISO A-802.11n-40MHz-Ch46-5230MHz-HT0

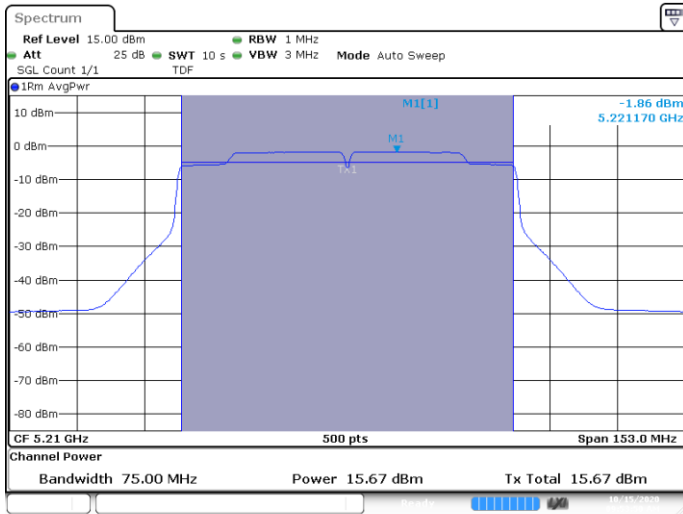


MIMO A-802.11ac-80MHz-Ch42-5210MHz-VHT0

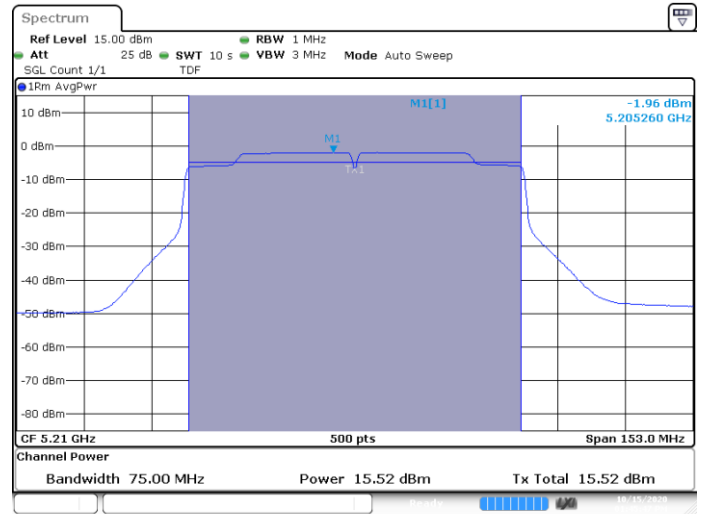



MIMO B-802.11ac-80MHz-Ch42-5210MHz-VHT0

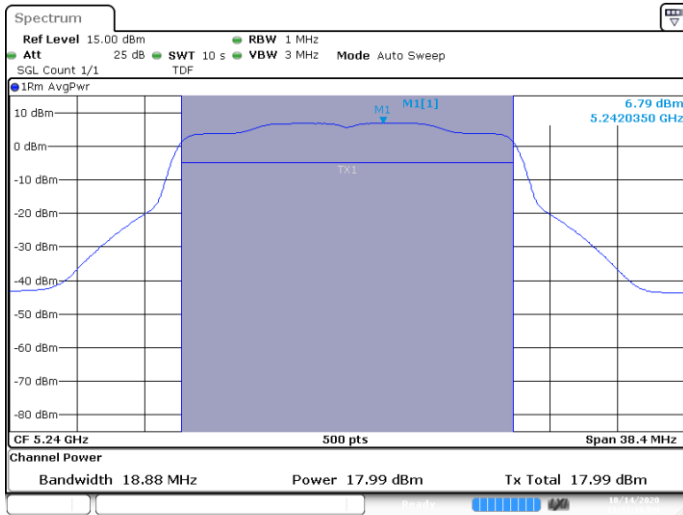

MIMO A-802.11ax-20MHz-Ch48-5240MHz-HE0


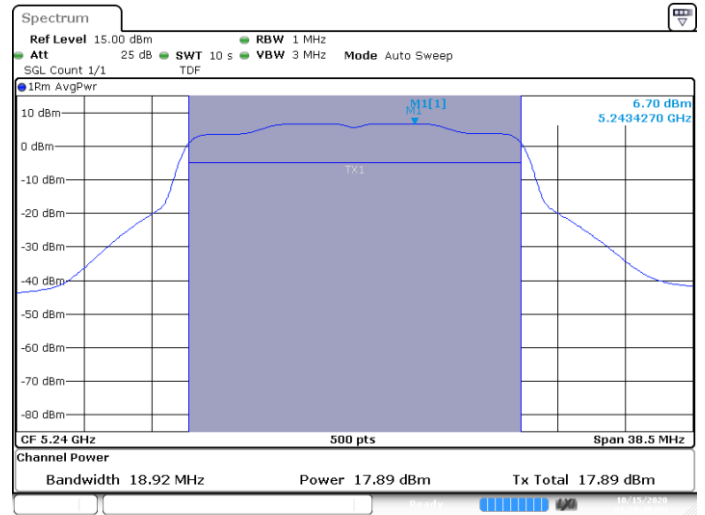


MIMO B-802.11ax-20MHz-Ch48-5240MHz-HE0

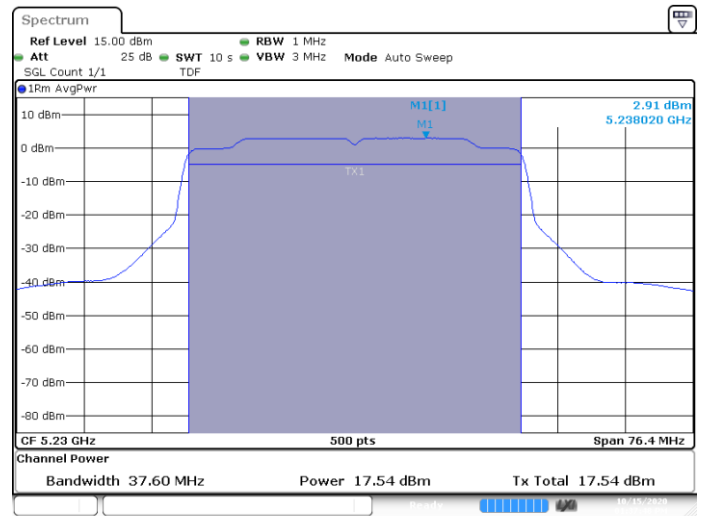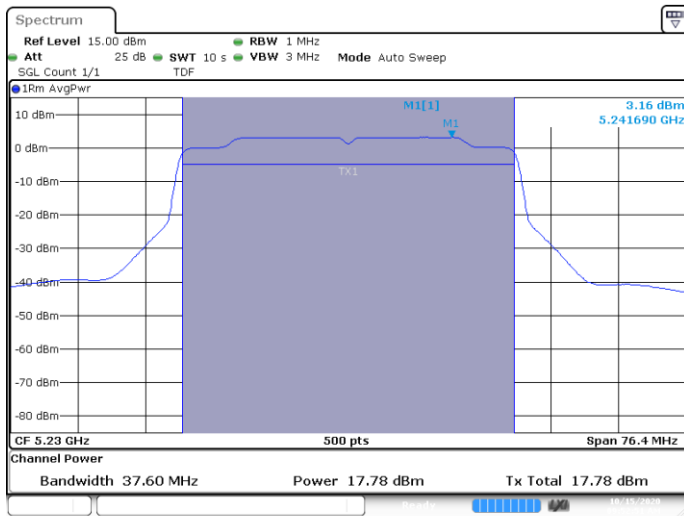

MIMO A-802.11ax-40MHz-Ch46-5230MHz-HE0


MIMO B-802.11ax-40MHz-Ch46-5230MHz-HE0

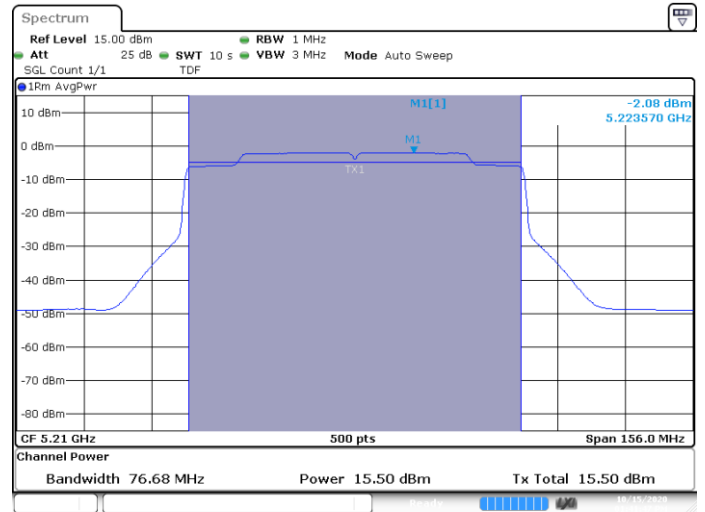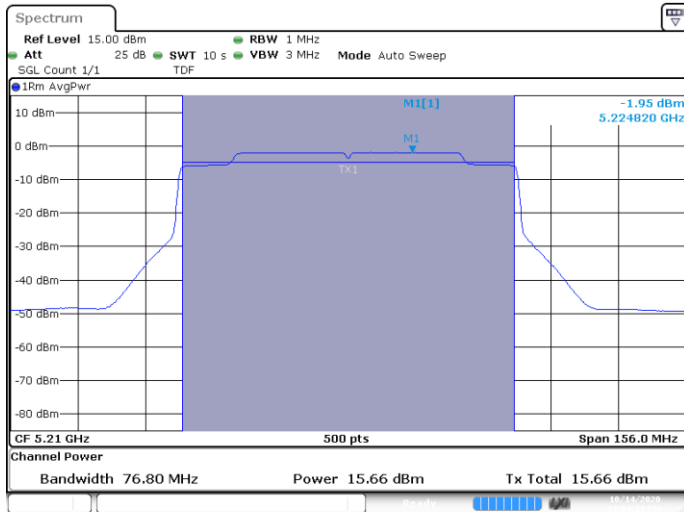


MIMO A-802.11ax-80MHz-Ch42-5210MHz-HE0

MIMO B-802.11ax-80MHz-Ch42-5210MHz-HE0


U-NII-2A

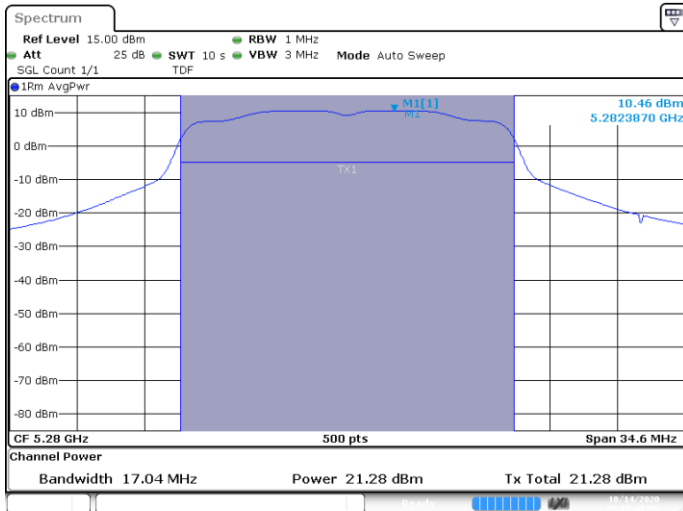

SISO A-802.11a-20MHz-Ch56-5280MHz-6

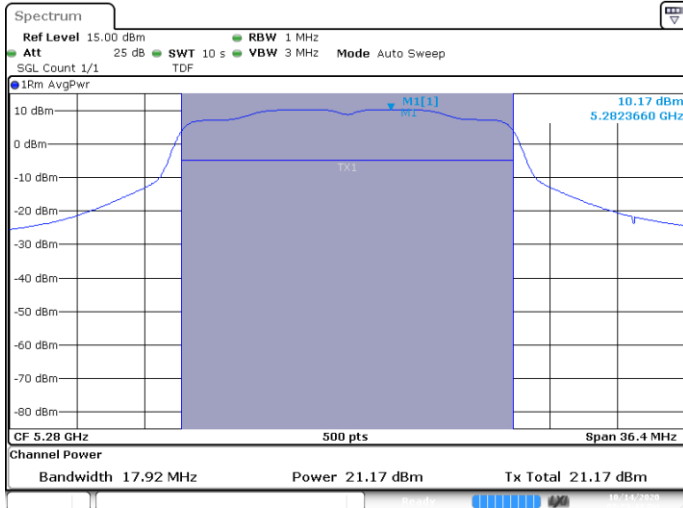


SISO A-802.11n-20MHz-Ch56-5280MHz-HT8

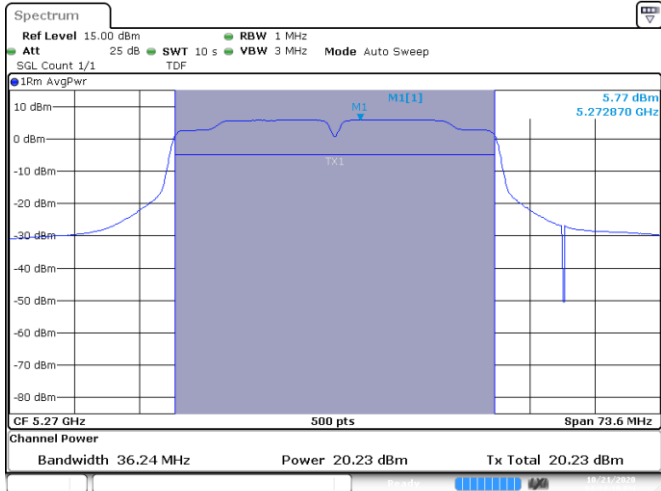


Date: 21.OCT.2010 16:34:11

SISO A-802.11n-40MHz-Ch54-5270MHz-HT8

Test Report N° 200928-01.TR01

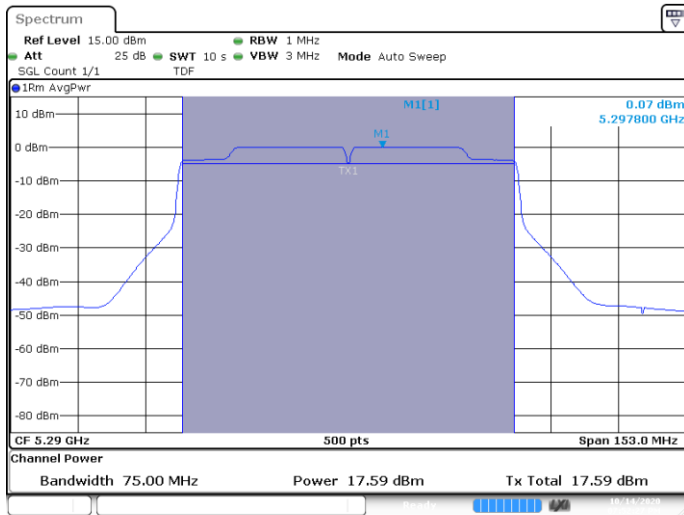


SISO A-802.11ac-80MHz-Ch58-5290MHz-VHT0

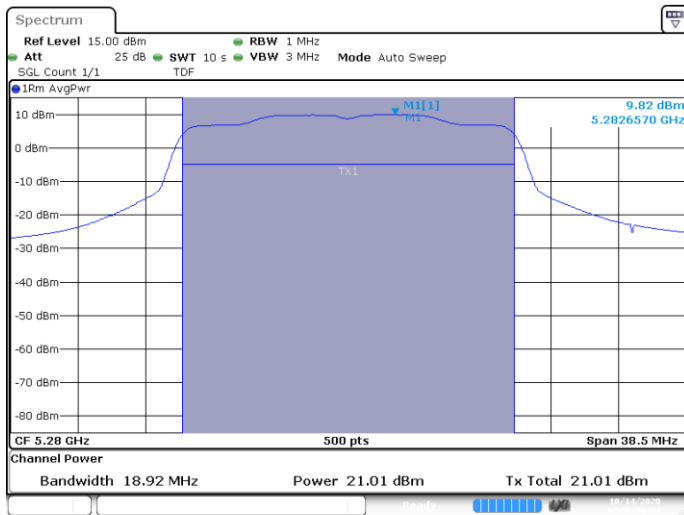


SISO A-802.11ax-20MHz-Ch56-5280MHz-HE0

Test Report N° 200928-01.TR01

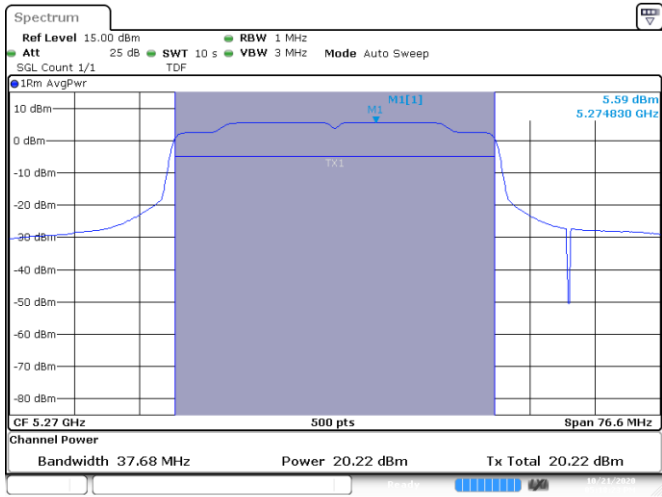

Date: 21.OCT.2020 17:18:23

SISO A-802.11ax-40MHz-Ch54-5270MHz-HE0

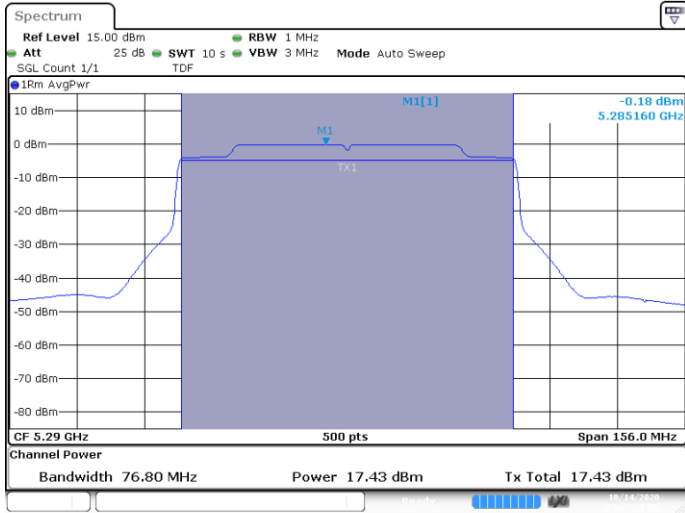


SISO A-802.11ax-80MHz-Ch58-5290MHz-HE0


C.1.3 Undesirable emission limits: out of band (Conducted)

U-NII-1


SISO A

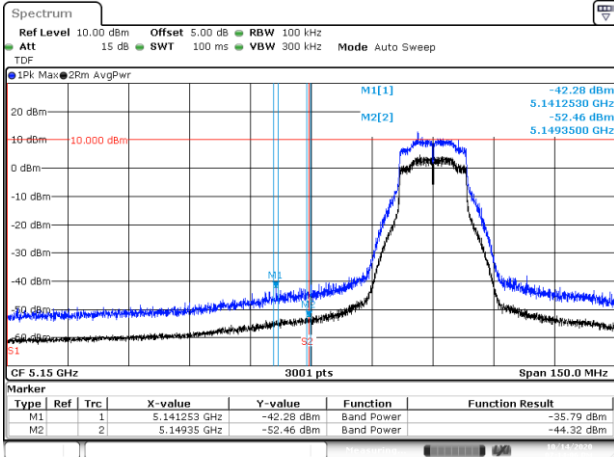


BE-R-LOW, SISO-A, 802.11a20-6Mbps, Ch36

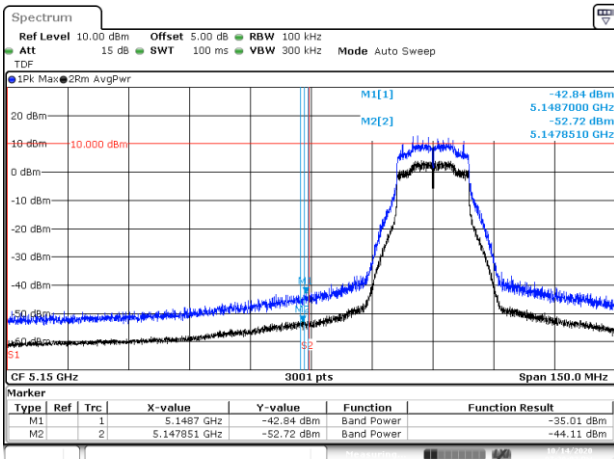

BE-R-LOW, SISO-A, 802.11n20-HT0, Ch36

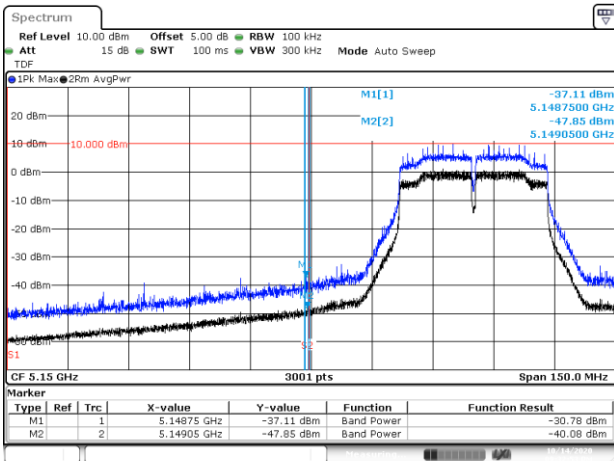

BE-R-LOW, SISO-A, 802.11n40-HT0, Ch38-Only Peak

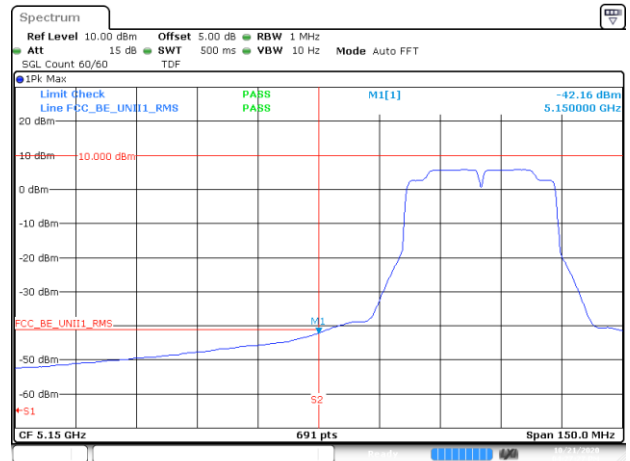

Date: 21 OCT 2020 18:27:27

BE-R-LOW-Peak-10Hz, SISO-A, 802.11n40-HT0, Ch38