

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2019/09/18 ~ 27	Temp./Hum.	24~25°C/49~51%
Test Voltage	AC 120V, 60Hz (via AC Adapter)	Tested By	Martin Chen
Cable Loss	---	Test Model	15Z90N

A.4.1 Peak Output Power

Test SKU: SKU #1

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11b	2412	21.72	21.89	21.89	0.155	4.54	26.43	0.440	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	22.40	22.43	22.43	0.175		26.97	0.498	
	2442	22.53	22.52	22.53	0.179		27.07	0.509	
	2457	22.52	22.41	22.52	0.179		27.06	0.508	
	2462	21.61	21.55	21.61	0.145		26.15	0.412	
	2467	20.72	20.65	20.72	0.118		25.26	0.336	
	2472	15.64	15.56	15.64	0.037		20.18	0.104	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11g	2412	21.59	21.78	21.78	0.151	4.54	26.32	0.429	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	22.49	22.46	22.49	0.177		27.03	0.505	
	2442	23.71	23.81	23.81	0.240		28.35	0.684	
	2457	22.77	22.64	22.77	0.189		27.31	0.538	
	2462	22.14	22.05	22.14	0.164		26.68	0.466	
	2467	19.81	19.79	19.81	0.096		24.35	0.272	
	2472	12.92	12.29	12.92	0.020		17.46	0.056	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	19.04	19.25	22.16	0.164	4.54	26.70	0.468	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	20.21	20.11	23.17	0.207		27.71	0.590	
	2442	22.01	21.96	25.00	0.316		29.54	0.899	
	2457	20.38	20.34	23.37	0.217		27.91	0.618	
	2462	19.65	19.51	22.59	0.182		27.13	0.516	
	2467	17.11	17.01	20.07	0.102		24.61	0.289	
	2472	10.01	9.81	12.92	0.020		17.46	0.056	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	19.32	19.22	22.28	0.169	4.54	26.82	0.481	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	18.22	18.17	21.21	0.132		25.75	0.376	
	2442	19.96	19.82	22.90	0.195		27.44	0.555	
	2447	19.98	19.93	22.97	0.198		27.51	0.564	
	2452	18.69	18.64	21.68	0.147		26.22	0.419	
	2457	15.36	15.14	18.26	0.067		22.80	0.191	
	2462	12.02	11.02	14.56	0.029		19.10	0.081	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	18.98	19.22	22.11	0.163	4.54	26.65	0.462	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	20.23	20.17	23.21	0.209		27.75	0.596	
	2442	21.93	21.95	24.95	0.313		29.49	0.889	
	2457	20.40	20.21	23.32	0.215		27.86	0.611	
	2462	19.63	19.53	22.59	0.182		27.13	0.516	
	2467	16.98	17.04	20.02	0.100		24.56	0.286	
	2472	10.21	9.91	13.07	0.020		17.61	0.058	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	19.08	19.13	22.12	0.163	4.54	26.66	0.463	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	18.02	17.94	20.99	0.126		25.53	0.357	
	2442	19.84	19.79	22.83	0.192		27.37	0.546	
	2447	19.81	19.73	22.78	0.190		27.32	0.540	
	2452	18.35	18.41	21.39	0.138		25.93	0.392	
	2457	15.11	14.94	18.04	0.064		22.58	0.181	
	2462	11.93	10.60	14.33	0.027		18.87	0.077	

Mode	RU Config	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	23.52	23.65	26.60	0.457	4.54	31.14	1.300	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		23.55	23.62	26.60	0.457		31.14	1.300	
	106/53		23.42	23.67	26.56	0.453		31.10	1.288	
	26/8	2472	10.74	10.07	13.43	0.022		17.97	0.063	
	52/40		10.93	10.11	13.55	0.023		18.09	0.064	
	106/54		10.97	10.24	13.63	0.023		18.17	0.066	

Mode	RU Config	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	23.44	13.65	23.87	0.244	4.54	28.41	0.693	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	14.18	14.08	17.14	0.052		21.68	0.147	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
BLE (1M)	2402	4.85	---	4.85	0.003	4.54	9.39	0.009	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2440	5.37	---	5.37	0.003		9.91	0.010	
	2480	4.66	---	4.66	0.003		9.20	0.008	
BLE (2M)	2402	4.84	---	4.84	0.003		9.38	0.009	
	2440	5.37	---	5.37	0.003		9.91	0.010	
	2480	4.66	---	4.66	0.003		9.20	0.008	
BLE (PHY Coded S2)	2402	4.82	---	4.82	0.003		9.36	0.009	
	2440	5.36	---	5.36	0.003		9.90	0.010	
	2480	4.65	---	4.65	0.003		9.19	0.008	
BLE (PHY Coded S8)	2402	4.82	---	4.82	0.003		9.36	0.009	
	2440	5.36	---	5.36	0.003		9.90	0.010	
	2480	4.65	---	4.65	0.003		9.19	0.008	

Note: The results have been included cable loss.

Test SKU: SKU #2

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11b	2412	21.72	21.89	21.89	0.155	4.5	26.39	0.436	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	22.40	22.43	22.43	0.175		26.93	0.493	
	2442	22.53	22.52	22.53	0.179		27.03	0.505	
	2457	22.52	22.41	22.52	0.179		27.02	0.504	
	2462	21.61	21.55	21.61	0.145		26.11	0.408	
	2467	20.72	20.65	20.72	0.118		25.22	0.333	
	2472	15.64	15.56	15.64	0.037		20.14	0.103	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11g	2412	21.59	21.78	21.78	0.151	4.5	26.28	0.425	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	22.49	22.46	22.49	0.177		26.99	0.500	
	2442	23.71	23.81	23.81	0.240		28.31	0.678	
	2457	22.77	22.64	22.77	0.189		27.27	0.533	
	2462	22.14	22.05	22.14	0.164		26.64	0.461	
	2467	19.81	19.79	19.81	0.096		24.31	0.270	
	2472	12.92	12.29	12.92	0.020		17.42	0.055	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n- HT20	2412	19.04	19.25	22.16	0.164	4.5	26.66	0.463	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	20.21	20.11	23.17	0.207		27.67	0.585	
	2442	22.01	21.96	25.00	0.316		29.50	0.891	
	2457	20.38	20.34	23.37	0.217		27.87	0.612	
	2462	19.65	19.51	22.59	0.182		27.09	0.512	
	2467	17.11	17.01	20.07	0.102		24.57	0.286	
	2472	10.01	9.81	12.92	0.020		17.42	0.055	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	19.32	19.22	22.28	0.169	4.5	26.78	0.476	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	18.22	18.17	21.21	0.132		25.71	0.372	
	2442	19.96	19.82	22.90	0.195		27.40	0.550	
	2447	19.98	19.93	22.97	0.198		27.47	0.558	
	2452	18.69	18.64	21.68	0.147		26.18	0.415	
	2457	15.36	15.14	18.26	0.067		22.76	0.189	
	2462	12.02	11.02	14.56	0.029		19.06	0.081	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	18.98	19.22	22.11	0.163	4.5	26.61	0.458	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	20.23	20.17	23.21	0.209		27.71	0.590	
	2442	21.93	21.95	24.95	0.313		29.45	0.881	
	2457	20.40	20.21	23.32	0.215		27.82	0.605	
	2462	19.63	19.53	22.59	0.182		27.09	0.512	
	2467	16.98	17.04	20.02	0.100		24.52	0.283	
	2472	10.21	9.91	13.07	0.020		17.57	0.057	

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	19.08	19.13	22.12	0.163	4.5	26.62	0.459	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	18.02	17.94	20.99	0.126		25.49	0.354	
	2442	19.84	19.79	22.83	0.192		27.33	0.541	
	2447	19.81	19.73	22.78	0.190		27.28	0.535	
	2452	18.35	18.41	21.39	0.138		25.89	0.388	
	2457	15.11	14.94	18.04	0.064		22.54	0.179	
	2462	11.93	10.60	14.33	0.027		18.83	0.076	

Note: The results have been included cable loss.

Mode	RU Config	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	23.52	23.65	26.60	0.457	4.5	31.10	1.288	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		23.55	23.62	26.60	0.457		31.10	1.288	
	106/53		23.42	23.67	26.56	0.453		31.06	1.276	
	26/8	2472	10.74	10.07	13.43	0.022		17.93	0.062	
	52/40		10.93	10.11	13.55	0.023		18.05	0.064	
	106/54		10.97	10.24	13.63	0.023		18.13	0.065	

Mode	RU Config	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	23.44	13.65	23.87	0.244	4.5	28.37	0.687	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	14.18	14.08	17.14	0.052		21.64	0.146	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max. Peak Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
BLE (1M)	2402	4.85	---	4.85	0.003	4.5	9.35	0.009	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2440	5.37	---	5.37	0.003		9.87	0.010	
	2480	4.66	---	4.66	0.003		9.16	0.008	
BLE (2M)	2402	4.84	---	4.84	0.003		9.34	0.009	
	2440	5.37	---	5.37	0.003		9.87	0.010	
	2480	4.66	---	4.66	0.003		9.16	0.008	
BLE (PHY Coded S2)	2402	4.82	---	4.82	0.003		9.32	0.009	
	2440	5.36	---	5.36	0.003		9.86	0.010	
	2480	4.65	---	4.65	0.003		9.15	0.008	
BLE (PHY Coded S8)	2402	4.82	---	4.82	0.003		9.32	0.009	
	2440	5.36	---	5.36	0.003		9.86	0.010	
	2480	4.65	---	4.65	0.003		9.15	0.008	

Note: The results have been included cable loss.

A.4.2 Average Output Power (Reporting only)

Test SKU: SKU #1

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11b	2412	19.16	19.35	0	19.35	0.086	4.54	23.89	0.245	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	19.91	19.96		19.96	0.099		24.50	0.282	
	2442	20.04	20.02		20.04	0.101		24.58	0.287	
	2457	20.02	19.95		20.02	0.100		24.56	0.286	
	2462	19.08	18.91		19.08	0.081		23.62	0.230	
	2467	18.18	18.08		18.18	0.066		22.72	0.187	
	2472	13.08	13.05		13.08	0.020		17.62	0.058	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11g	2412	16.72	16.91	0	16.91	0.049	4.54	21.45	0.140	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	17.94	17.9		17.94	0.062		22.48	0.177	
	2442	19.63	19.74		19.74	0.094		24.28	0.268	
	2457	18.21	18.05		18.21	0.066		22.75	0.188	
	2462	17.47	17.37		17.47	0.056		22.01	0.159	
	2467	14.79	14.78		14.79	0.030		19.33	0.086	
	2472	1.52	1.28		1.52	0.001		6.06	0.004	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	14.01	14.23	0	17.13	0.052	4.54	21.67	0.147	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	15.45	15.38		18.43	0.070		22.97	0.198	
	2442	17.15	17.13		20.15	0.104		24.69	0.294	
	2457	15.63	15.55		18.60	0.072		23.14	0.206	
	2462	14.83	14.63		17.74	0.059		22.28	0.169	
	2467	11.95	11.84		14.91	0.031		19.45	0.088	
	2472	-0.04	-0.86		2.58	0.002		7.12	0.005	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	13.83	13.81	0	16.83	0.048	4.54	21.37	0.137	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	12.8	12.73		15.78	0.038		20.32	0.108	
	2442	14.65	14.59		17.63	0.058		22.17	0.165	
	2447	14.78	14.73		17.77	0.060		22.31	0.170	
	2452	13.14	13.22		16.19	0.042		20.73	0.118	
	2457	9.53	9.42		12.49	0.018		17.03	0.050	
	2462	1.41	0.54		4.01	0.003		8.55	0.007	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	13.92	14.12	17.03	0.050	4.54	21.57	0.144	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	15.28	15.22	18.26	0.067		22.80	0.191	
	2442	17.03	17.05	20.05	0.101		24.59	0.288	
	2457	15.56	15.39	18.49	0.071		23.03	0.201	
	2462	14.68	14.58	17.64	0.058		22.18	0.165	
	2467	11.78	11.79	14.80	0.030		19.34	0.086	
	2472	-0.11	-0.95	2.50	0.002		7.04	0.005	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	13.66	13.7	16.69	0.047	4.54	21.23	0.133	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	12.61	12.49	15.56	0.036		20.10	0.102	
	2442	14.47	14.42	17.46	0.056		22.00	0.158	
	2447	14.58	14.55	17.58	0.057		22.12	0.163	
	2452	12.96	13	15.99	0.040		20.53	0.113	
	2457	9.28	9.24	12.27	0.017		16.81	0.048	
	2462	1.06	0.14	3.63	0.002		8.17	0.007	

Note: The results have been included cable loss.

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	14.13	14.45	0	17.30	0.054	4.54	21.84	0.153	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		14.26	14.43		17.36	0.054		21.90	0.155	
	106/53		14.28	14.48		17.39	0.055		21.93	0.156	
	26/8	2472	-1.36	-2.57		1.09	0.001		5.63	0.004	
	52/40		-1.13	-2.29		1.34	0.001		5.88	0.004	
	106/54		-1.02	-2.05		1.51	0.001		6.05	0.004	

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	13.85	14.08	0	16.98	0.050	4.54	21.52	0.142	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	1.27	1.17		4.23	0.003		8.77	0.008	

Note: The results have been included cable loss.

Test SKU: SKU #2

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11b	2412	19.16	19.35	0	19.35	0.086	4.5	23.85	0.243	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	19.91	19.96		19.96	0.099		24.46	0.279	
	2442	20.04	20.02		20.04	0.101		24.54	0.284	
	2457	20.02	19.95		20.02	0.100		24.52	0.283	
	2462	19.08	18.91		19.08	0.081		23.58	0.228	
	2467	18.18	18.08		18.18	0.066		22.68	0.185	
	2472	13.08	13.05		13.08	0.020		17.58	0.057	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max. Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11g	2412	16.72	16.91	0	16.91	0.049	4.5	21.41	0.138	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	17.94	17.9		17.94	0.062		22.44	0.175	
	2442	19.63	19.74		19.74	0.094		24.24	0.265	
	2457	18.21	18.05		18.21	0.066		22.71	0.187	
	2462	17.47	17.37		17.47	0.056		21.97	0.157	
	2467	14.79	14.78		14.79	0.030		19.29	0.085	
	2472	1.52	1.28		1.52	0.001		6.02	0.004	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	14.01	14.23	0	17.13	0.052	4.5	21.63	0.146	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	15.45	15.38		18.43	0.070		22.93	0.196	
	2442	17.15	17.13		20.15	0.104		24.65	0.292	
	2457	15.63	15.55		18.60	0.072		23.10	0.204	
	2462	14.83	14.63		17.74	0.059		22.24	0.167	
	2467	11.95	11.84		14.91	0.031		19.41	0.087	
	2472	-0.04	-0.86		2.58	0.002		7.08	0.005	

Note: The results have been included cable loss.

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11n-HT40	2422	13.83	13.81	0	16.83	0.048	4.5	21.33	0.136	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	12.8	12.73		15.78	0.038		20.28	0.107	
	2442	14.65	14.59		17.63	0.058		22.13	0.163	
	2447	14.78	14.73		17.77	0.060		22.27	0.169	
	2452	13.14	13.22		16.19	0.042		20.69	0.117	
	2457	9.53	9.42		12.49	0.018		16.99	0.050	
	2462	1.41	0.54		4.01	0.003		8.51	0.007	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	13.92	14.12	17.03	0.050	4.5	21.53	0.142	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2417	15.28	15.22	18.26	0.067		22.76	0.189	
	2442	17.03	17.05	20.05	0.101		24.55	0.285	
	2457	15.56	15.39	18.49	0.071		22.99	0.199	
	2462	14.68	14.58	17.64	0.058		22.14	0.164	
	2467	11.78	11.79	14.80	0.030		19.30	0.085	
	2472	-0.11	-0.95	2.50	0.002		7.00	0.005	

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Total Average Output Power		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		Chain 0	Chain 1	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	2422	13.66	13.7	16.69	0.047	4.5	21.19	0.132	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	2427	12.61	12.49	15.56	0.036		20.06	0.101	
	2442	14.47	14.42	17.46	0.056		21.96	0.157	
	2447	14.58	14.55	17.58	0.057		22.08	0.161	
	2452	12.96	13	15.99	0.040		20.49	0.112	
	2457	9.28	9.24	12.27	0.017		16.77	0.048	
	2462	1.06	0.14	3.63	0.002		8.13	0.007	


Note: The results have been included cable loss.


Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	26/0	2412	14.13	14.45	0	17.30	0.054	4.5	21.80	0.151	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	52/37		14.26	14.43		17.36	0.054		21.86	0.153	
	106/53		14.28	14.48		17.39	0.055		21.89	0.155	
	26/8	2472	-1.36	-2.57		1.09	0.001		5.59	0.004	
	52/40		-1.13	-2.29		1.34	0.001		5.84	0.004	
	106/54		-1.02	-2.05		1.51	0.001		6.01	0.004	

Mode	RU Config	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Total Average Output Power		Antenna Gain (dBi)	Average Output Power (E.I.R.P.)		Limit
			Chain 0	Chain 1		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE40	242/61	2422	13.85	14.08	0	16.98	0.050	4.5	21.48	0.141	<30dBm (1W) (Maximum Peak Output Power) <36dBm (4W) (E.I.R.P)
	242/62	2467	1.27	1.17		4.23	0.003		8.73	0.007	

Note: The results have been included cable loss.


A.4.3 Measurement Plots

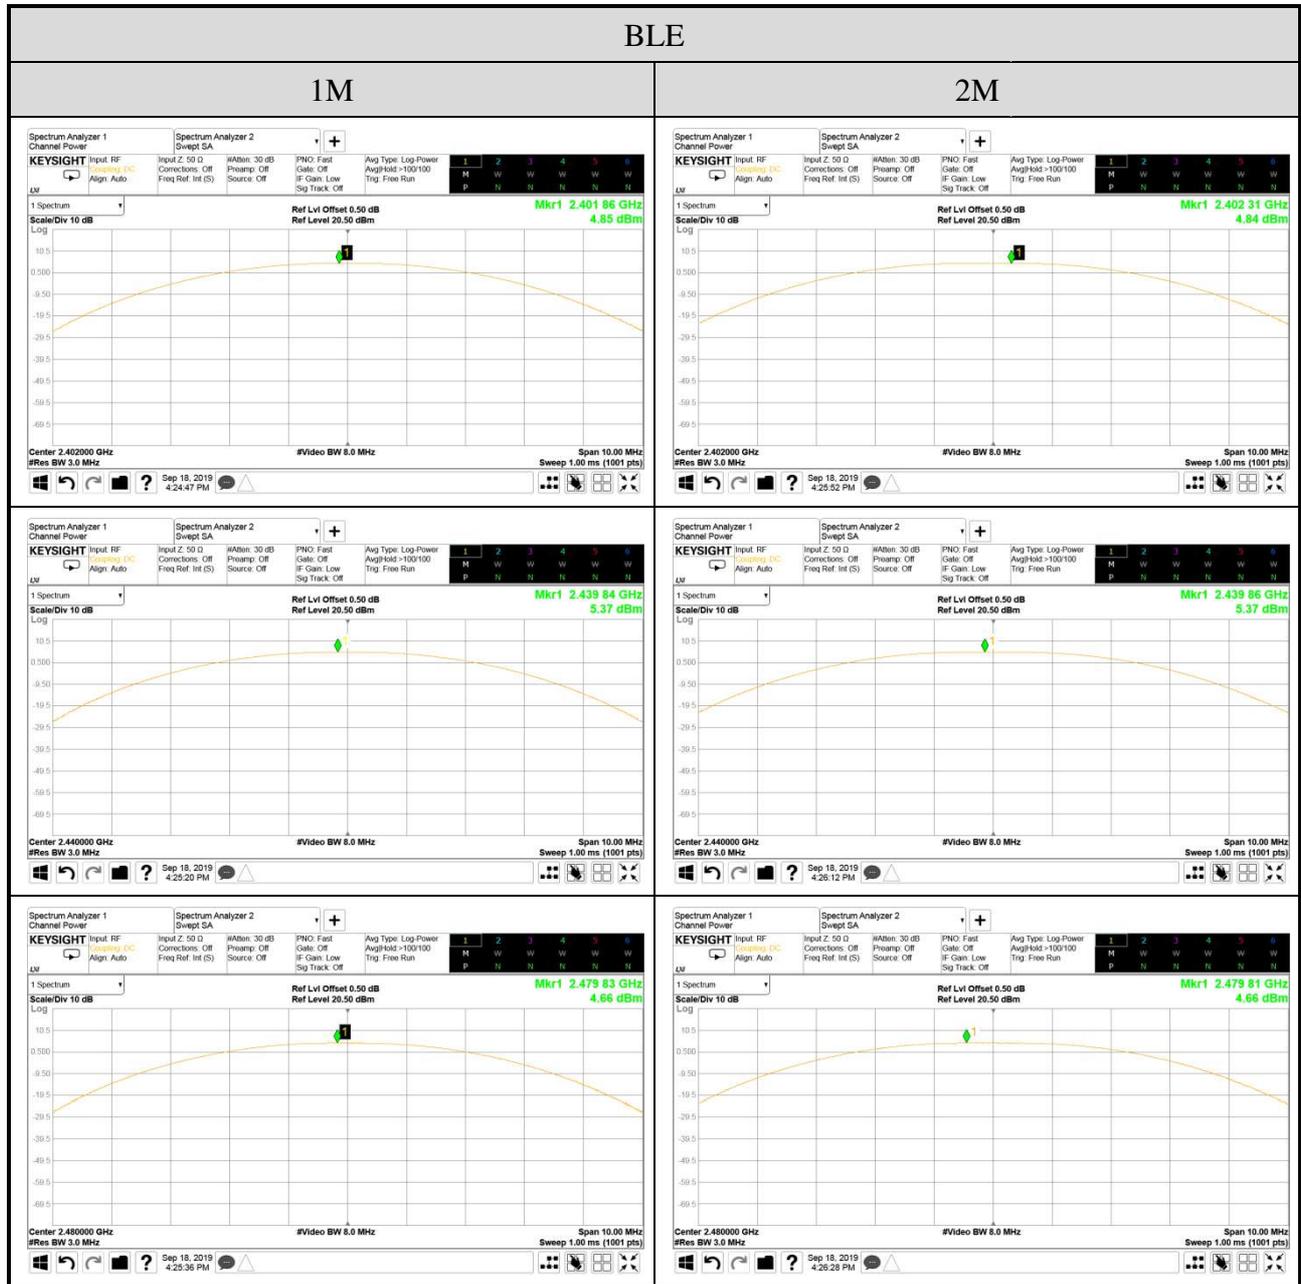



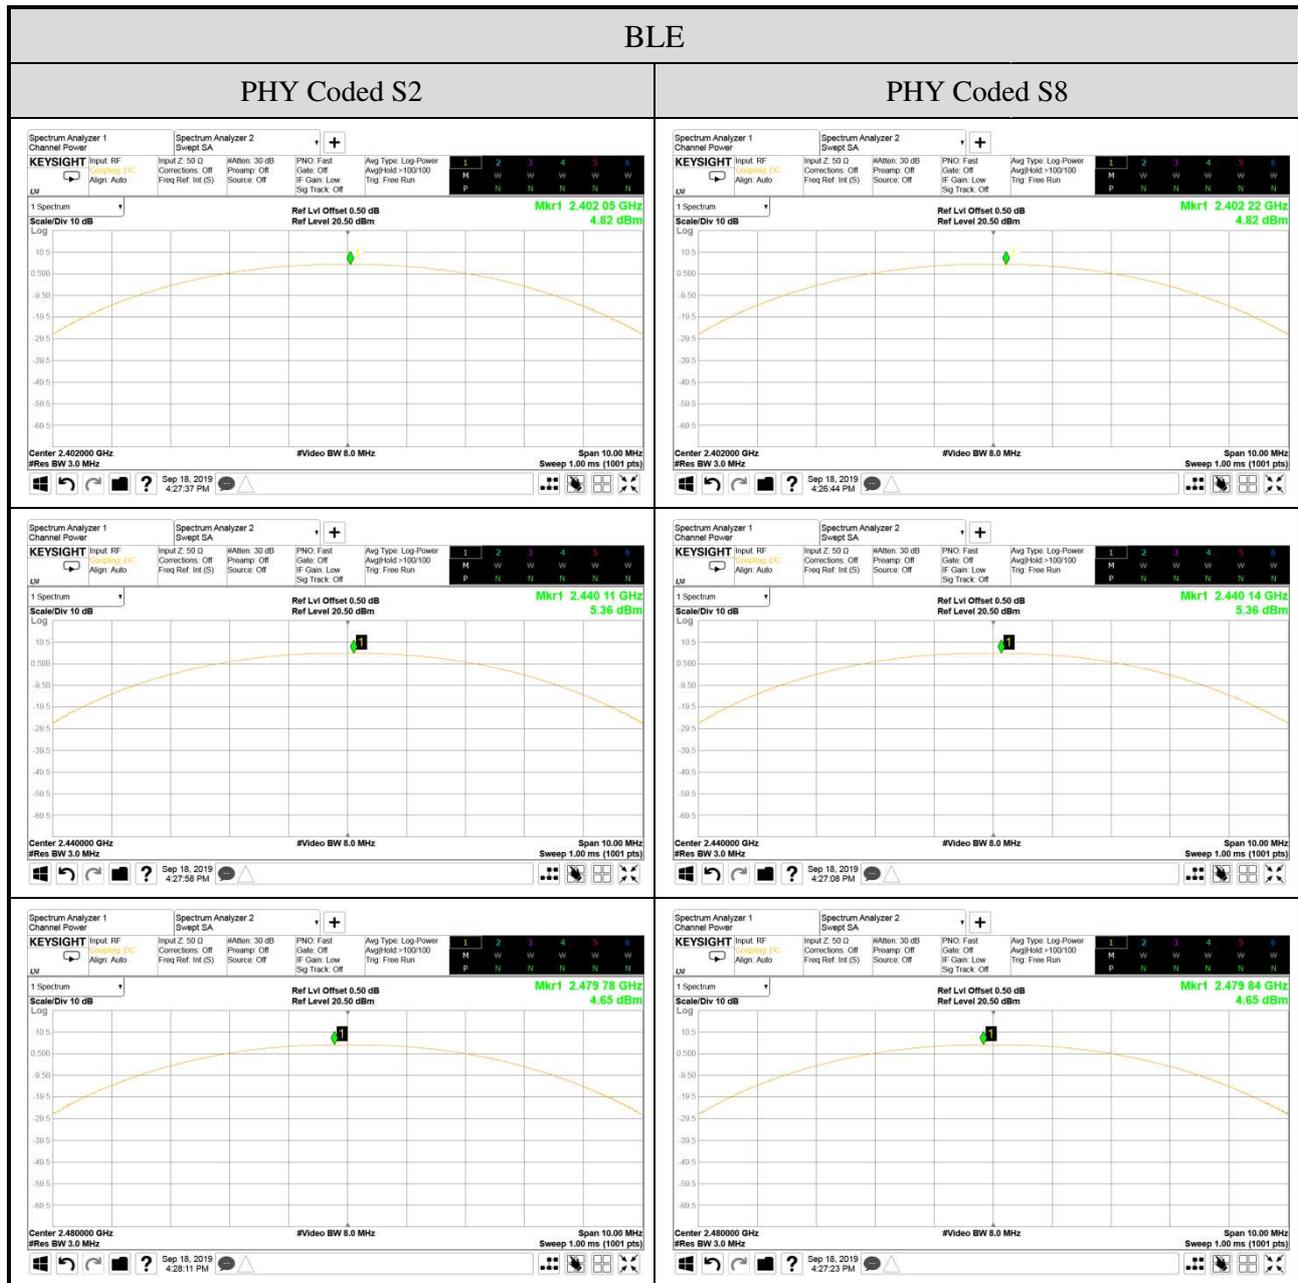


A.5 EMISSION LIMITATIONS






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Martin Chen
Frequency	TX 2412MHz	Test Model	15Z90N
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

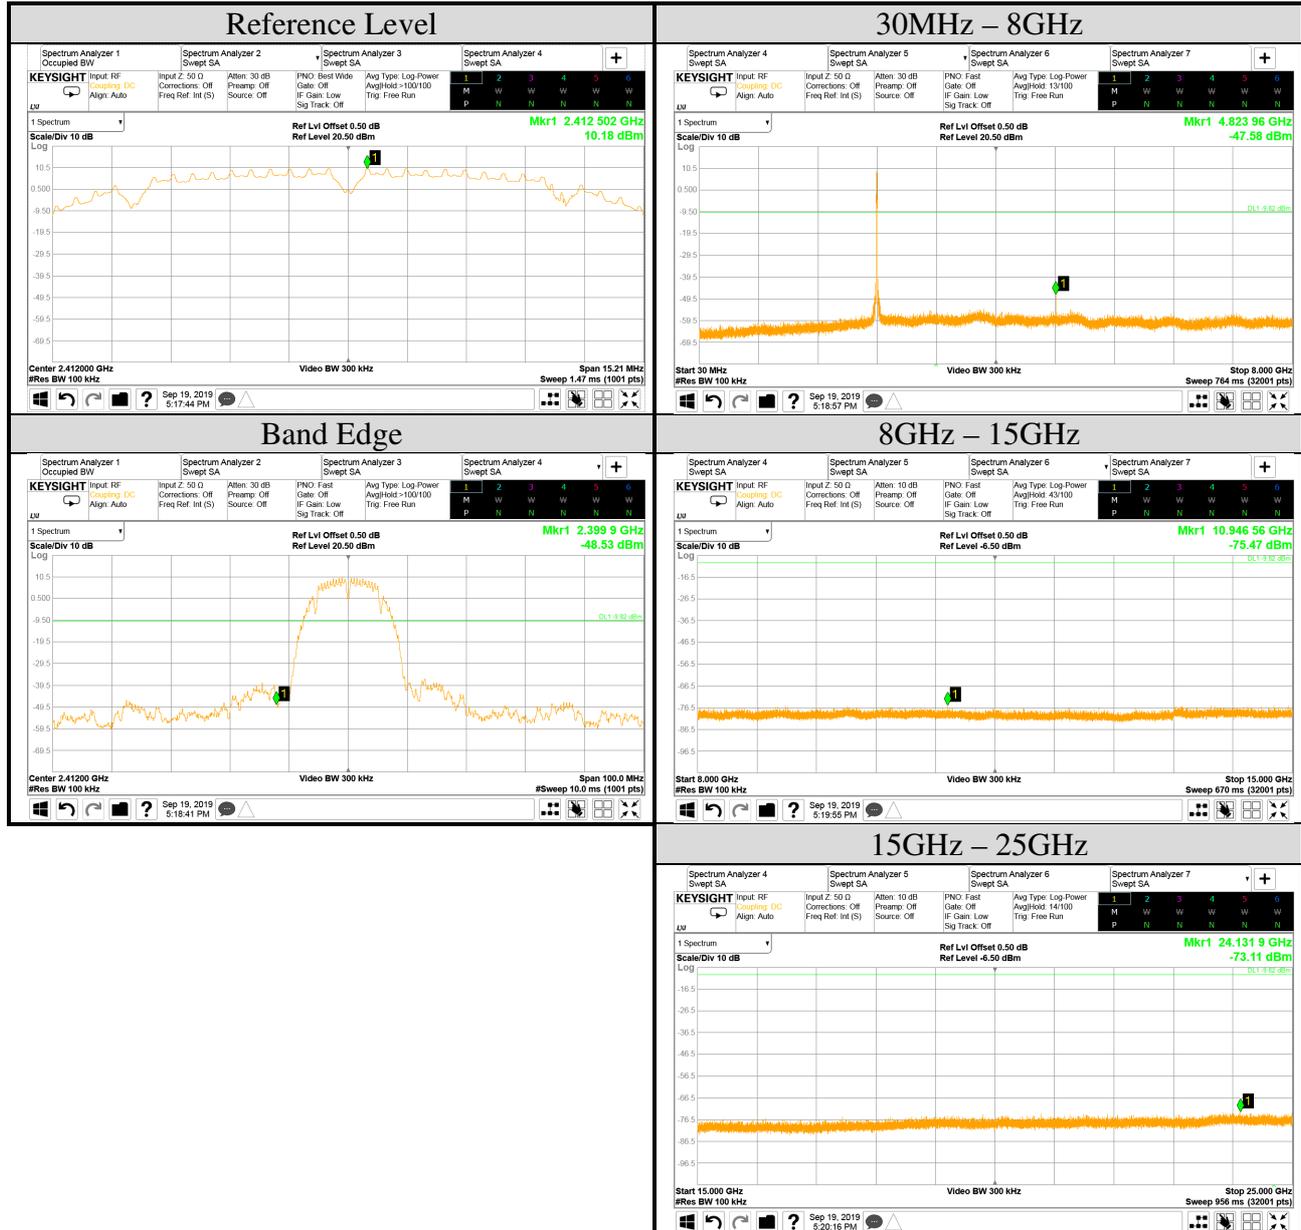

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Martin Chen
Frequency	TX 2442MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

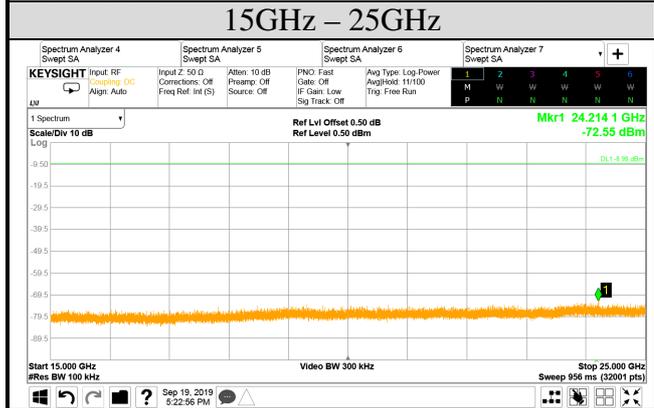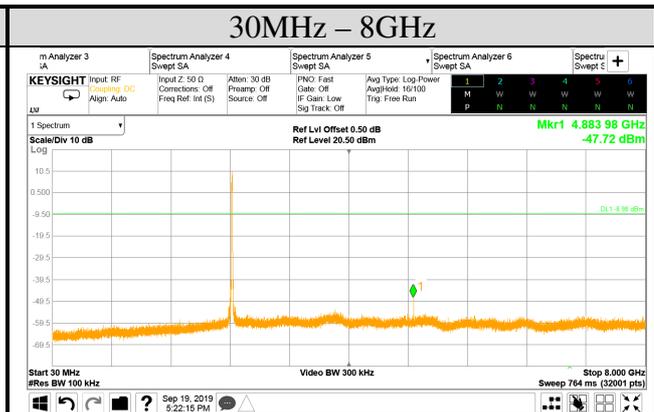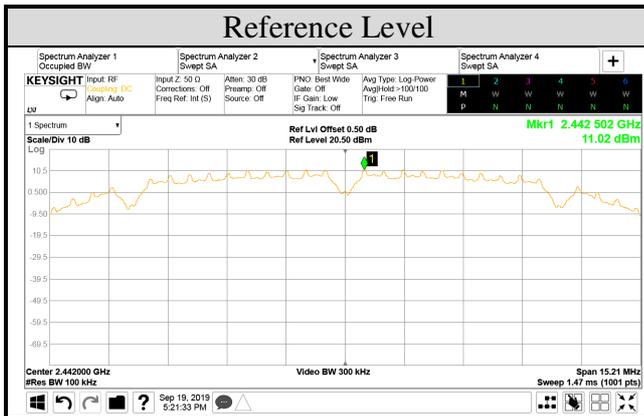


Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Martin Chen
Frequency	TX 2462MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

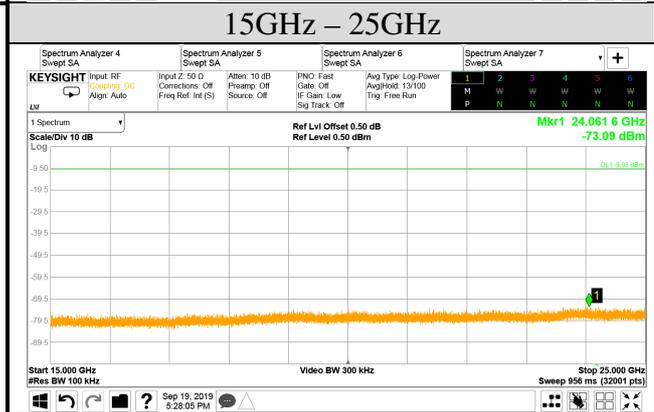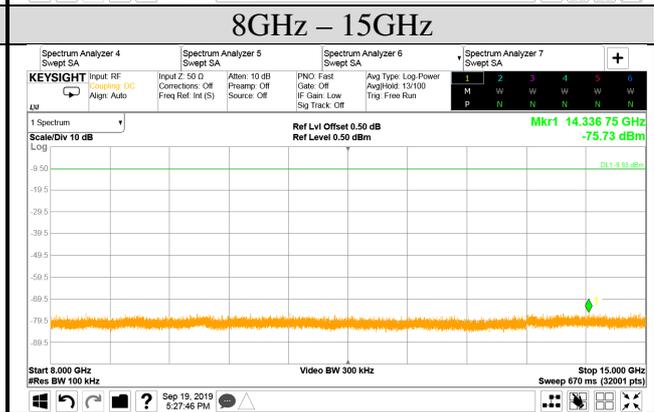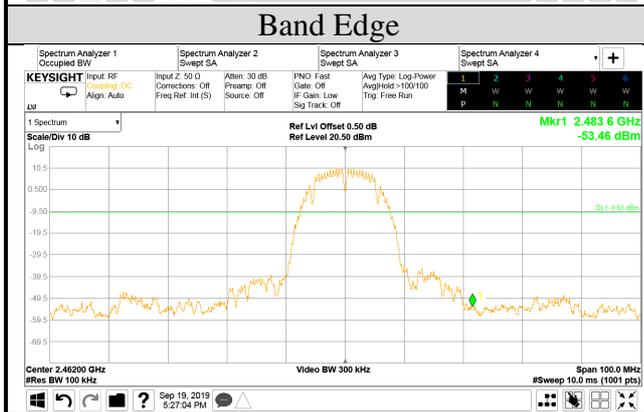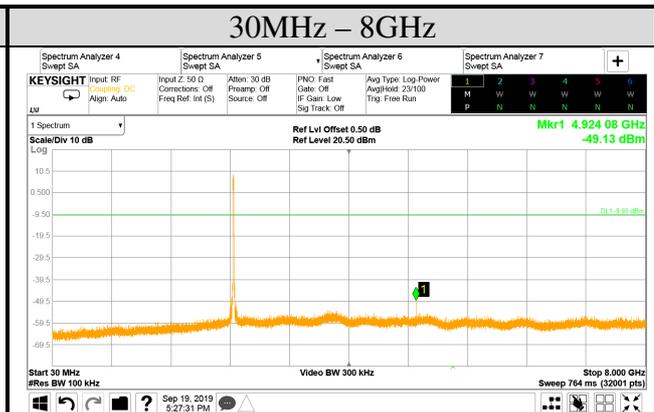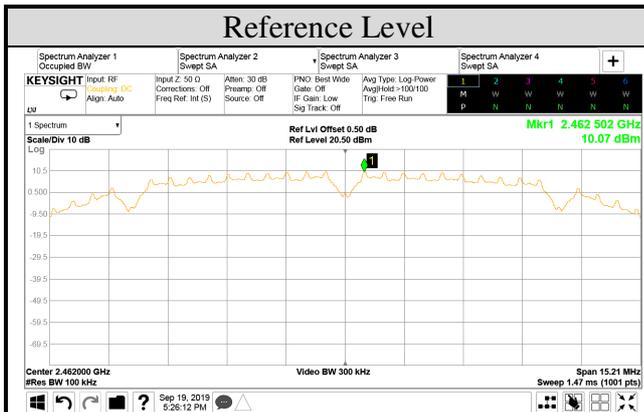






Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303




Test Date	2019/09/19 ~ 27	Temp./Hum.	24 ~ 25°C/49 ~ 54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11b	Tested By	Martin Chen
Frequency	TX 2472MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

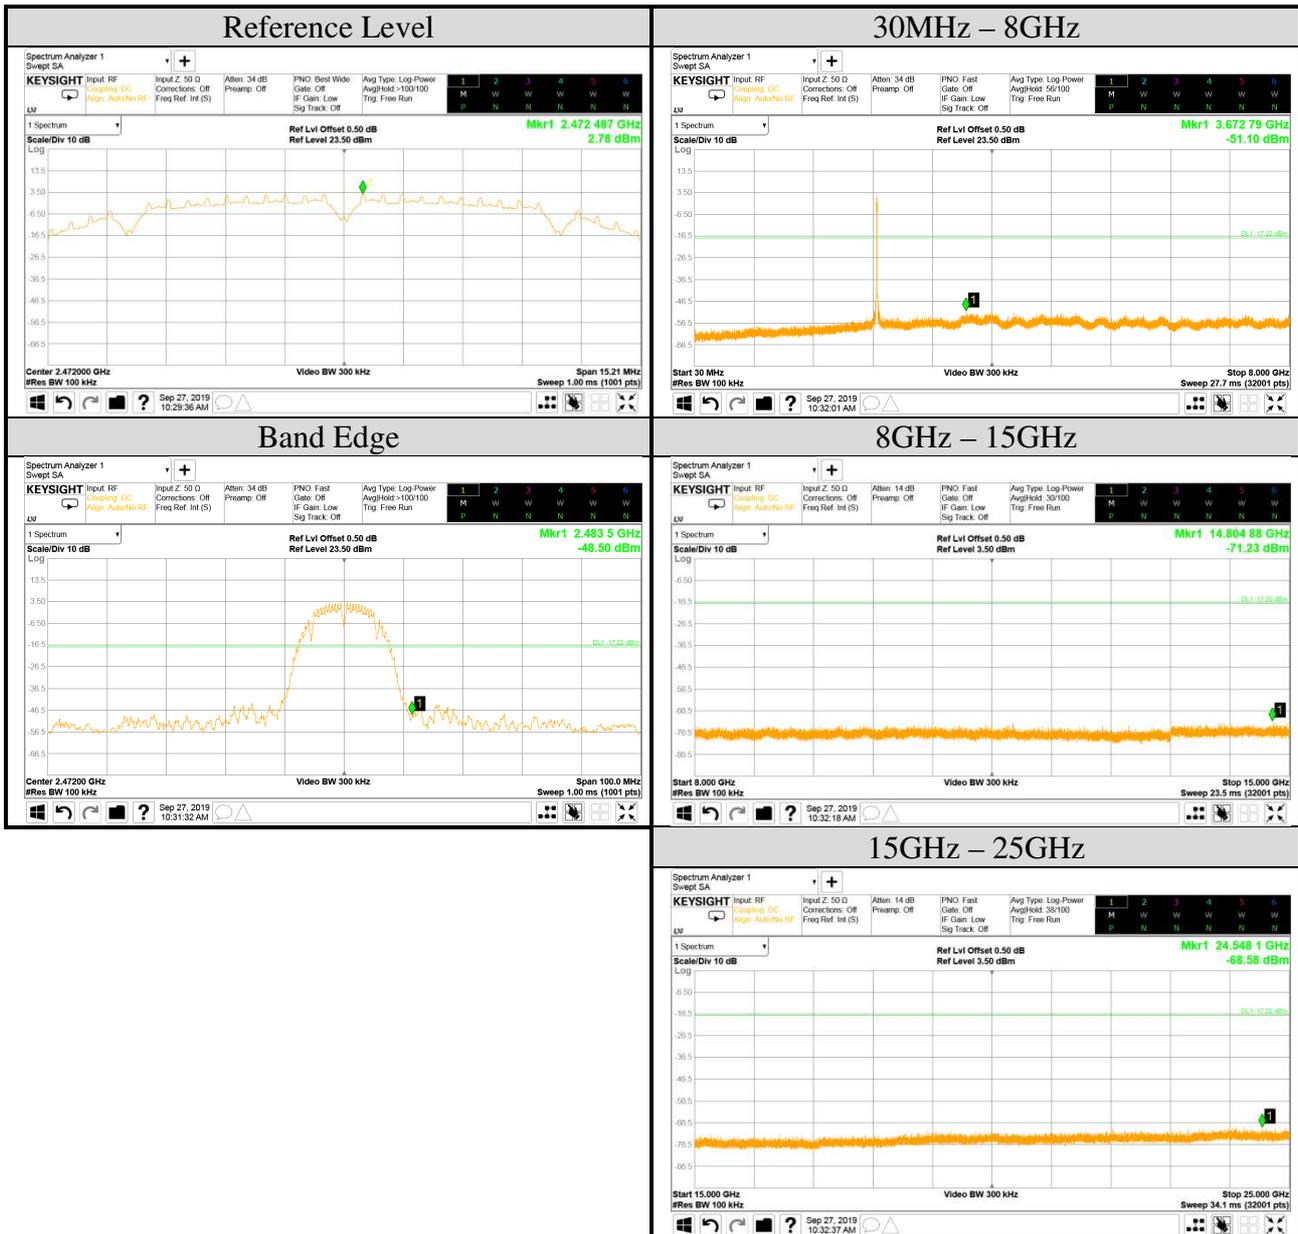





Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Martin Chen
Frequency	TX 2412MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

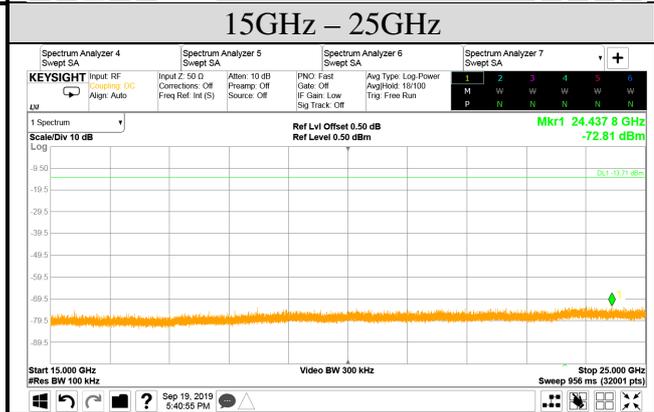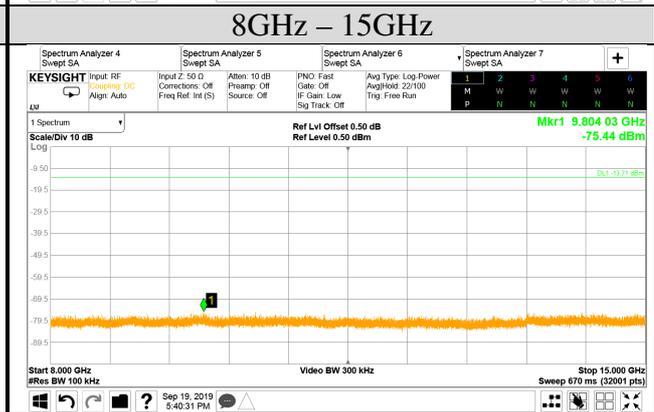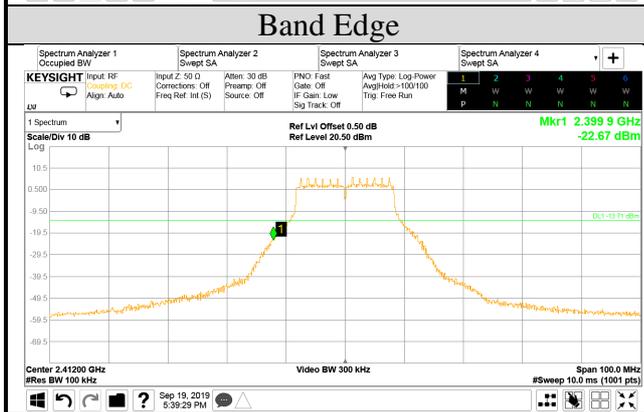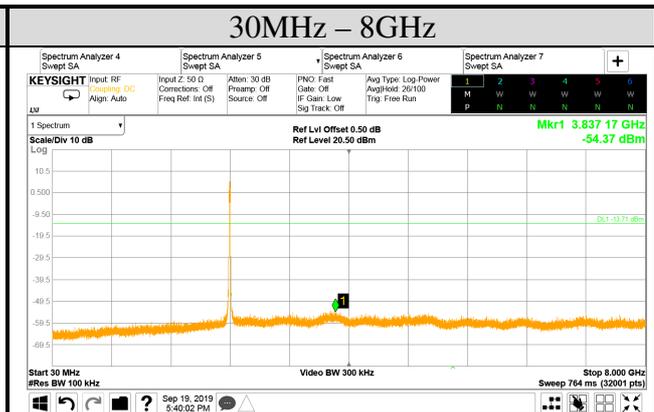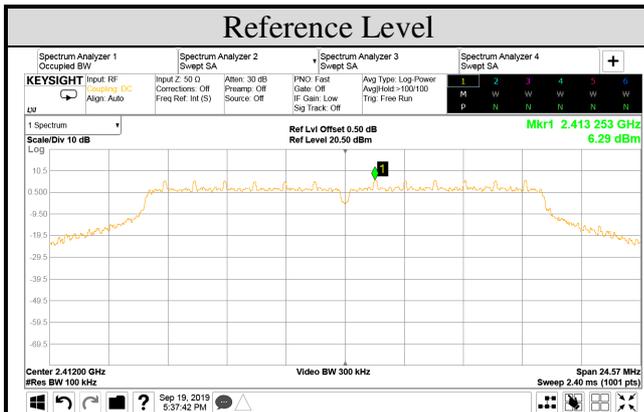






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Martin Chen
Frequency	TX 2442MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

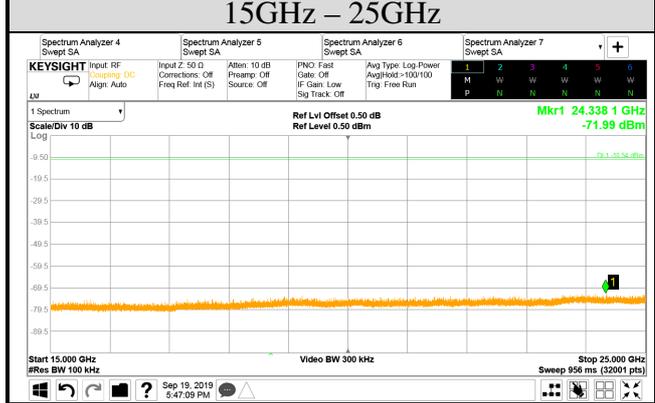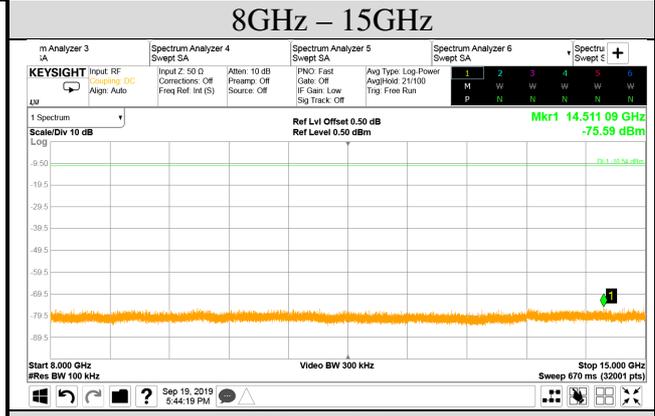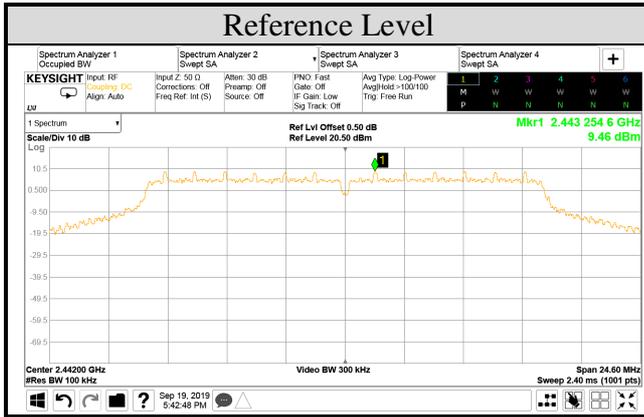






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Martin Chen
Frequency	TX 2462MHz	Test Model	15Z90N
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

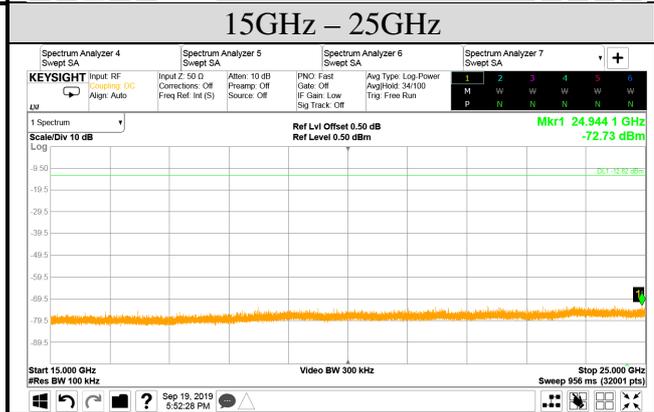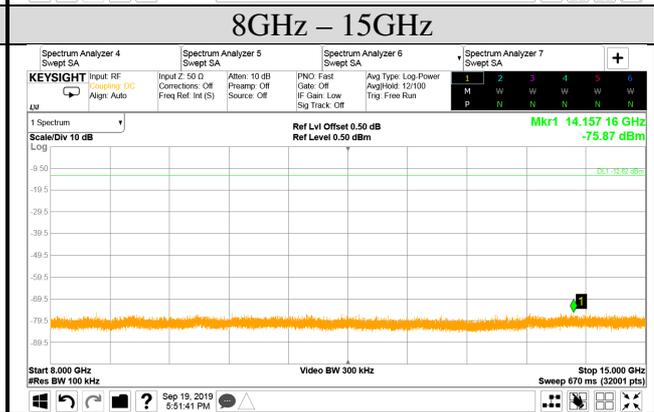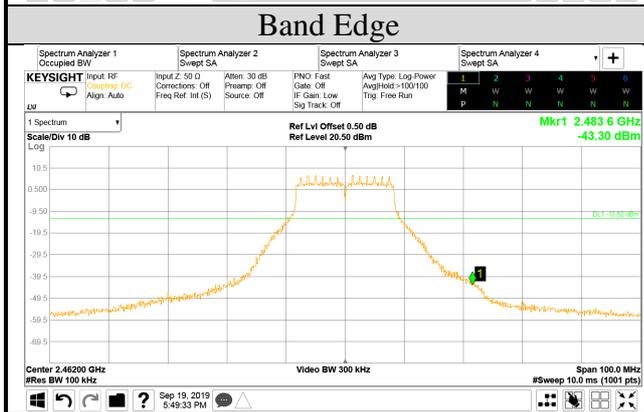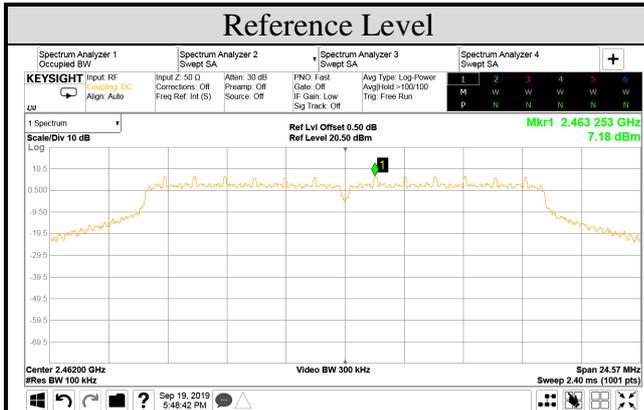





Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Tested By	Martin Chen
Frequency	TX 2472MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

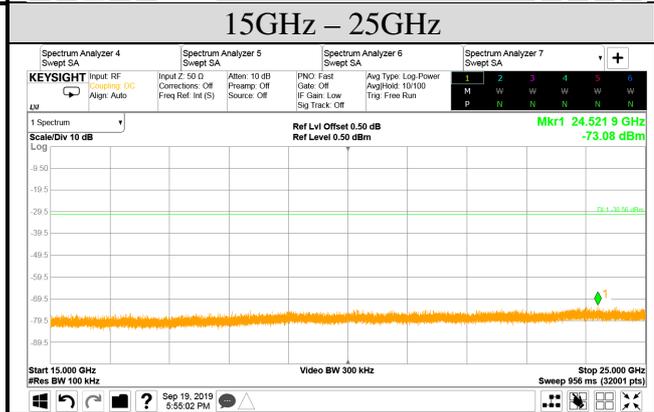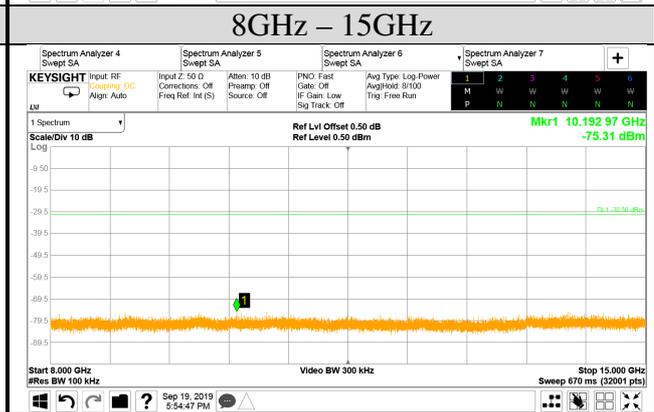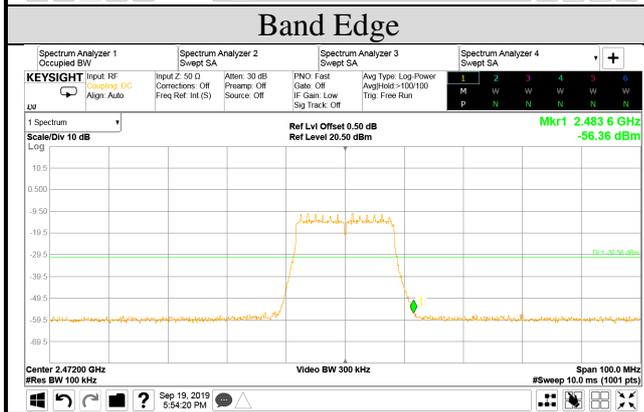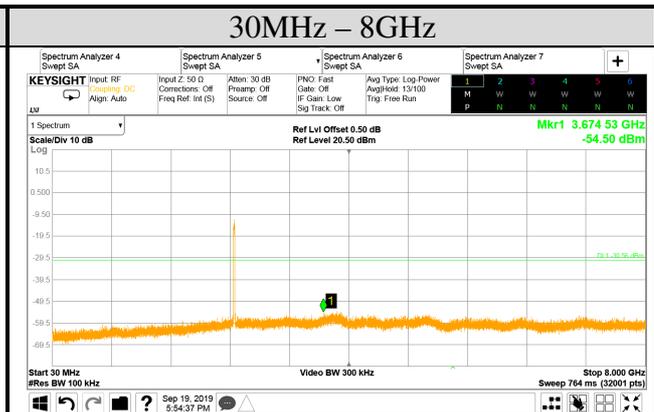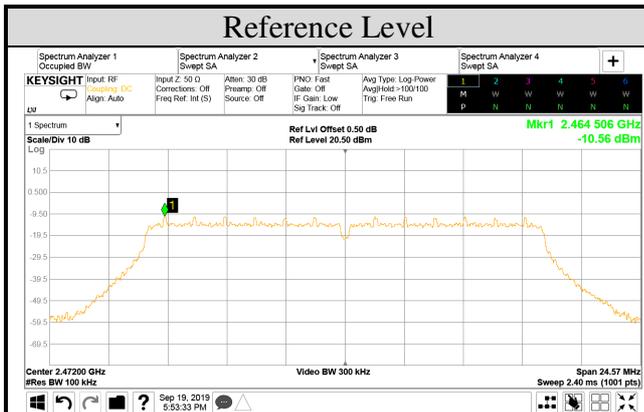






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Tested By	Martin Chen
Frequency	TX 2412MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

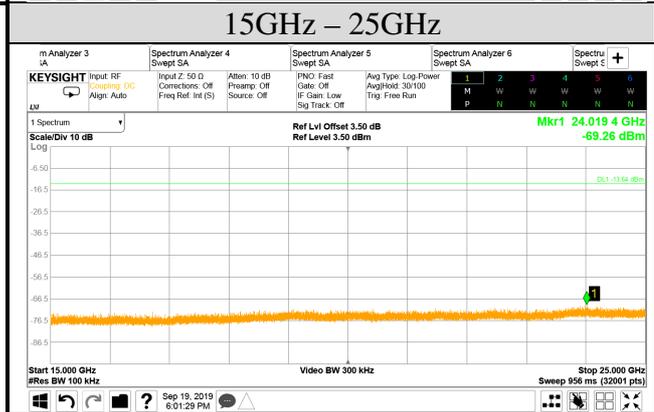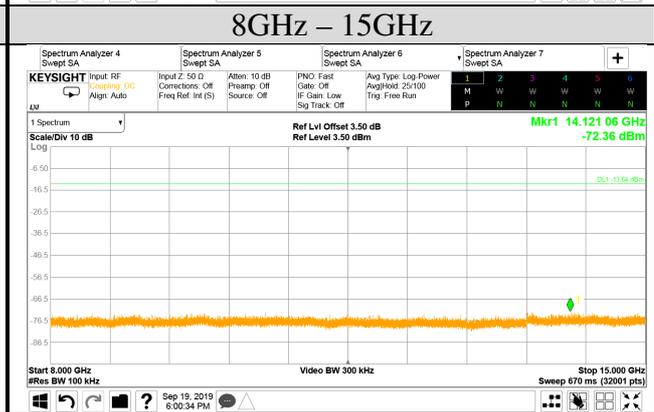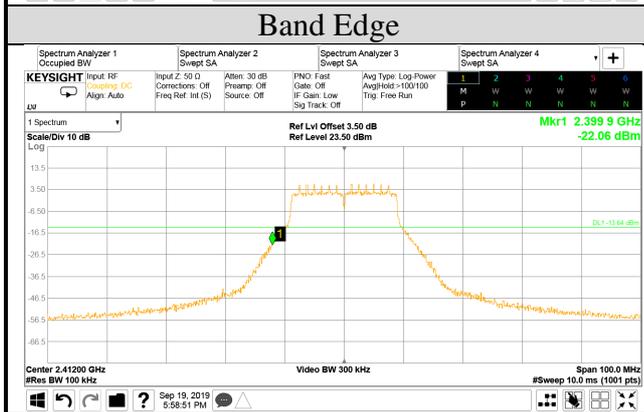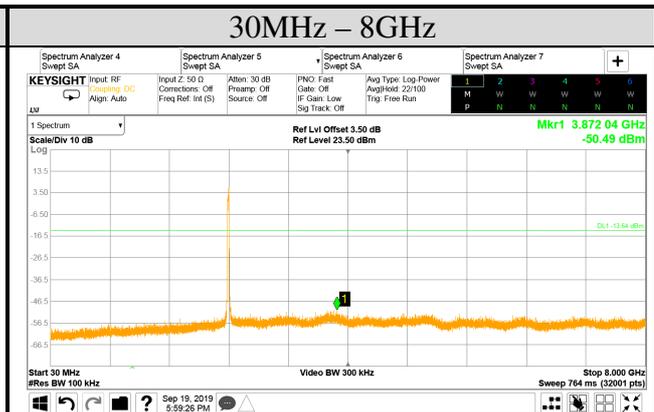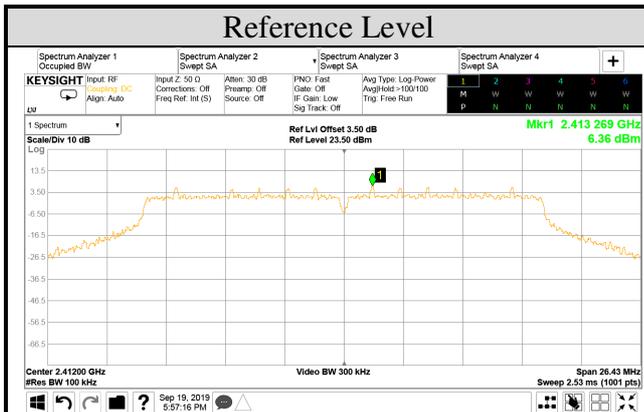






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Tested By	Martin Chen
Frequency	TX 2442MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

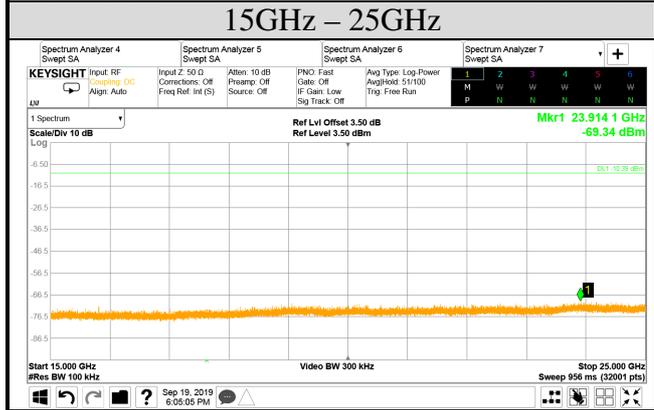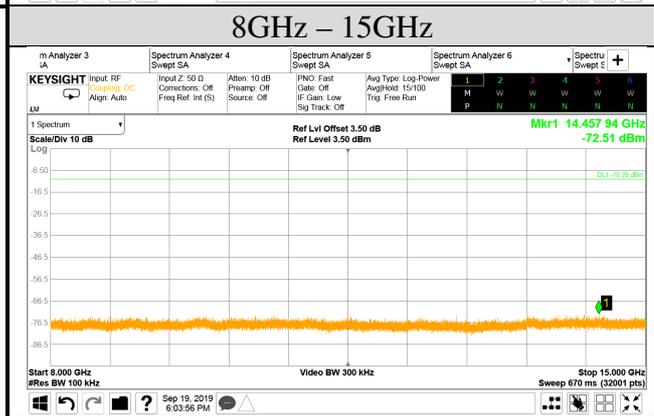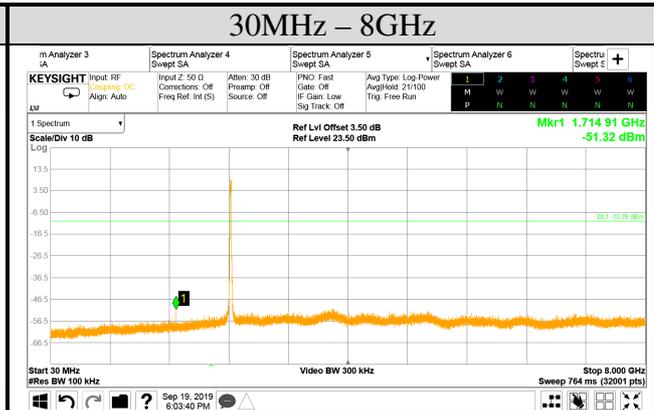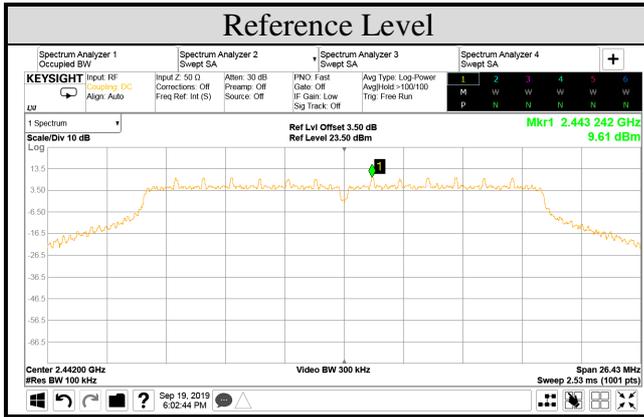






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Tested By	Martin Chen
Frequency	TX 2462MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

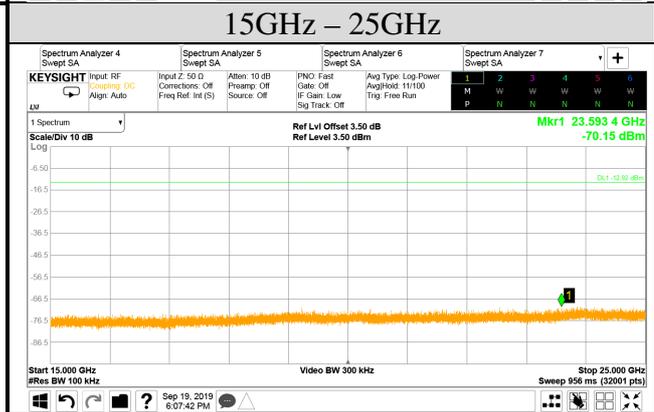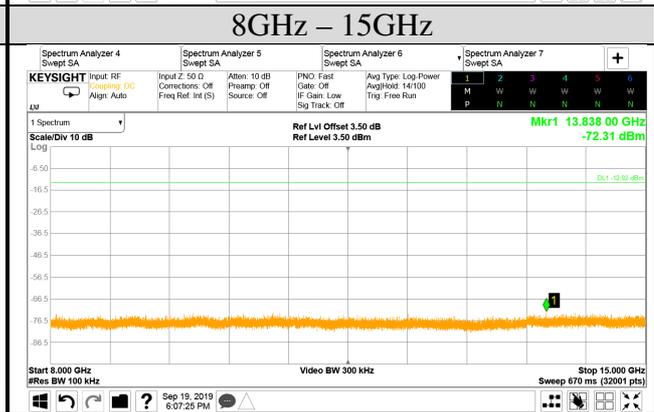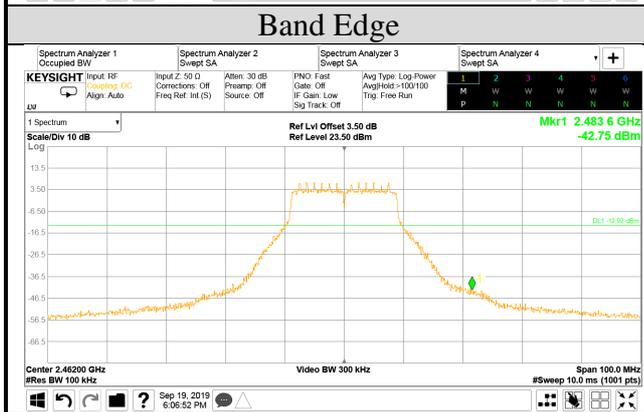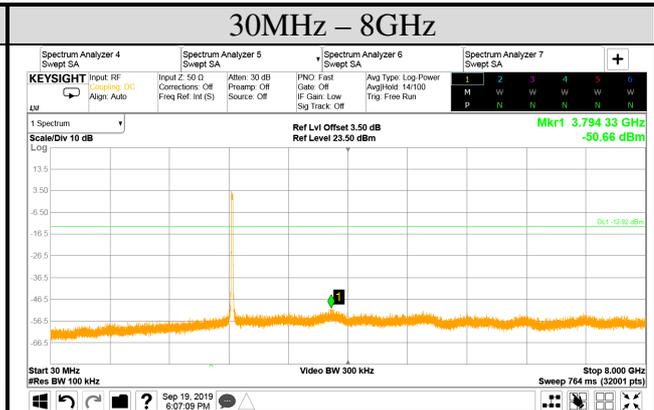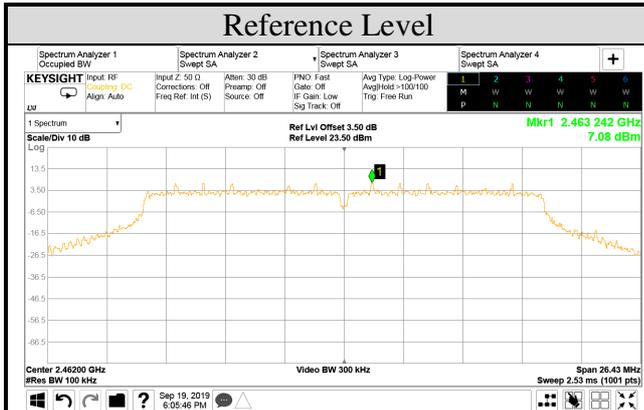





Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Tested By	Martin Chen
Frequency	TX 2472MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

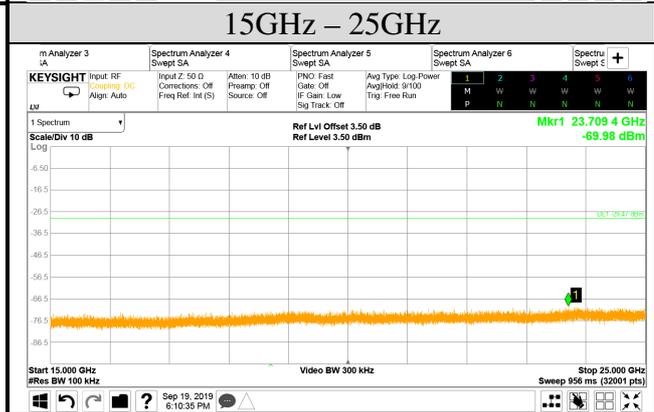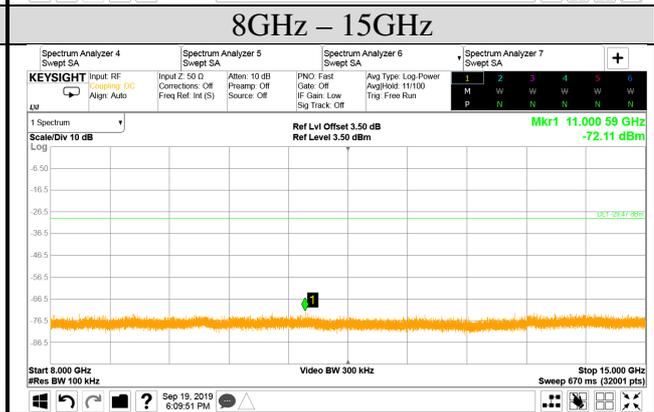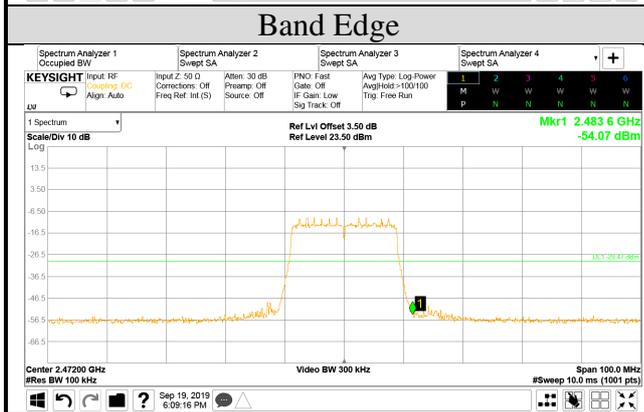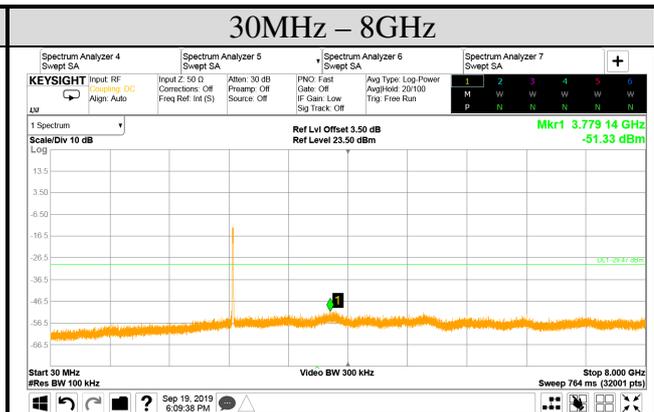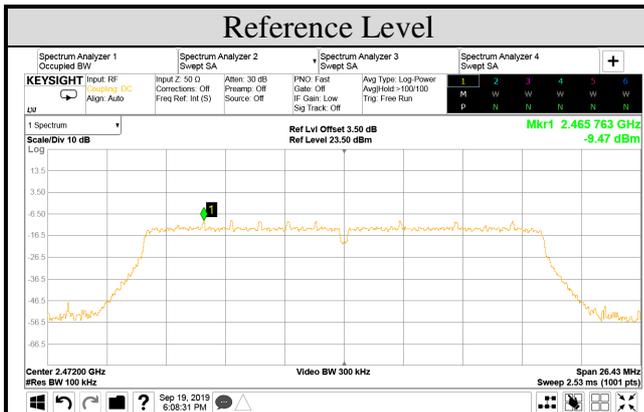






Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Tested By	Martin Chen
Frequency	TX 2422MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

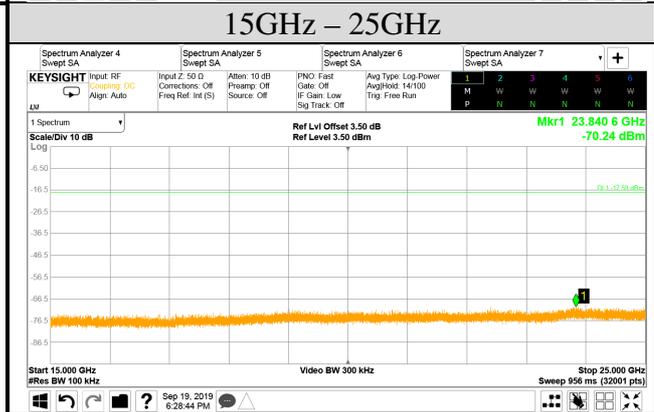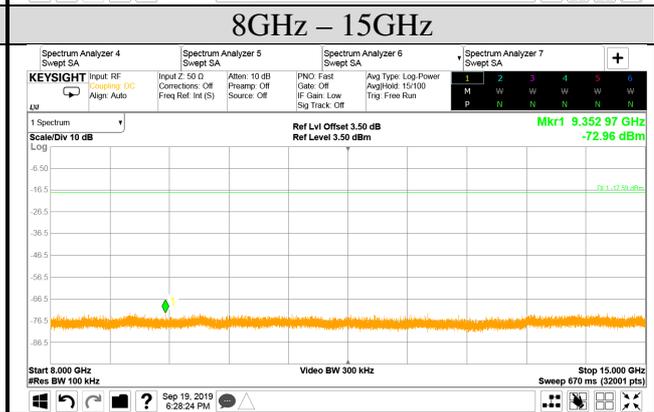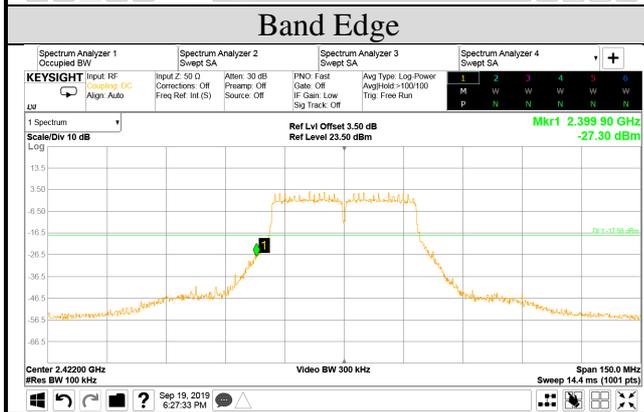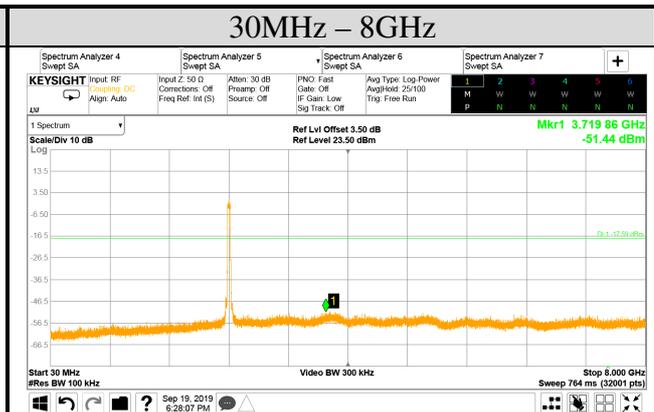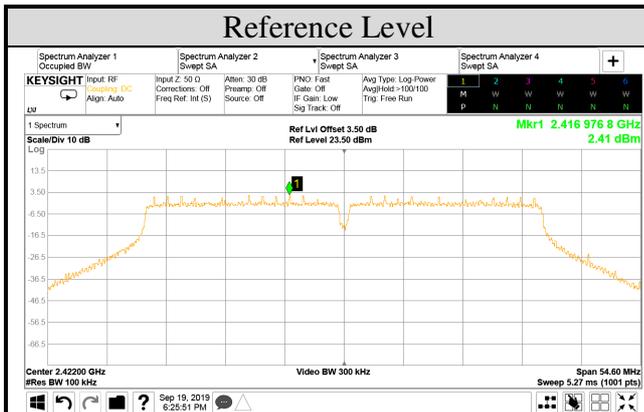

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Tested By	Martin Chen
Frequency	TX 2442MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

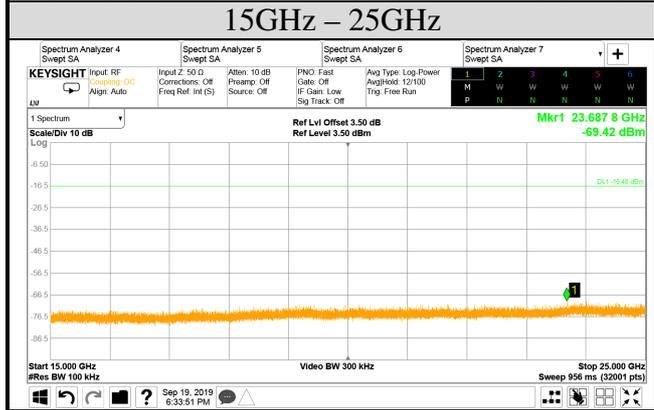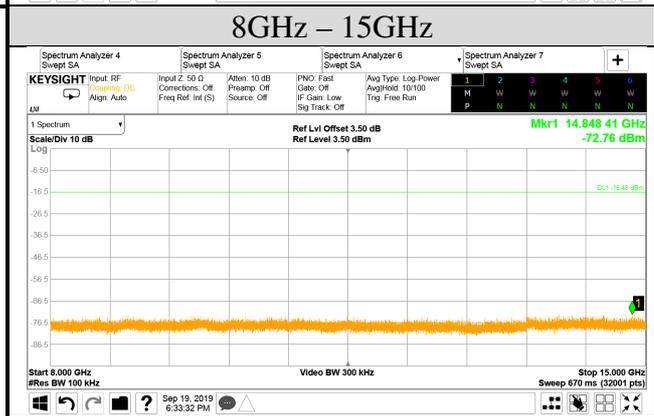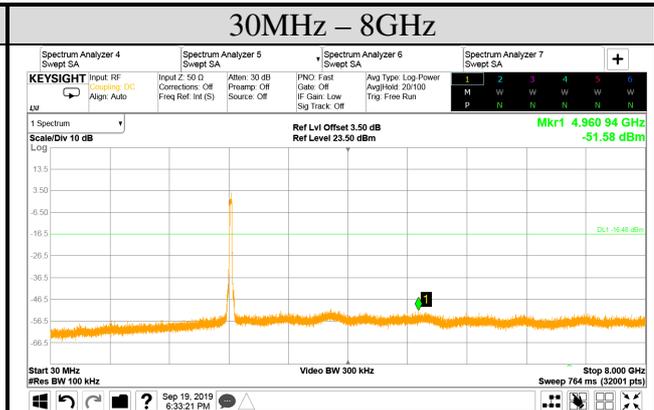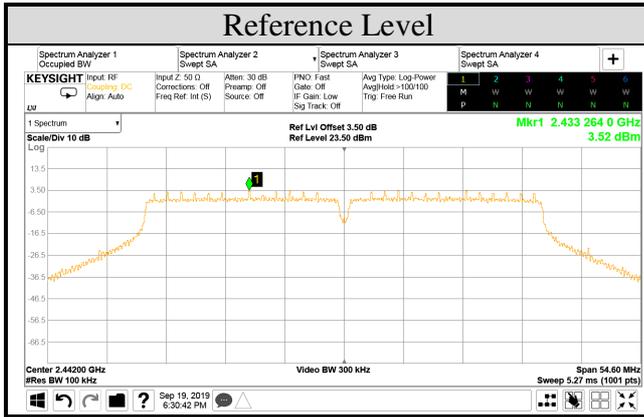

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Tested By	Martin Chen
Frequency	TX 2452MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

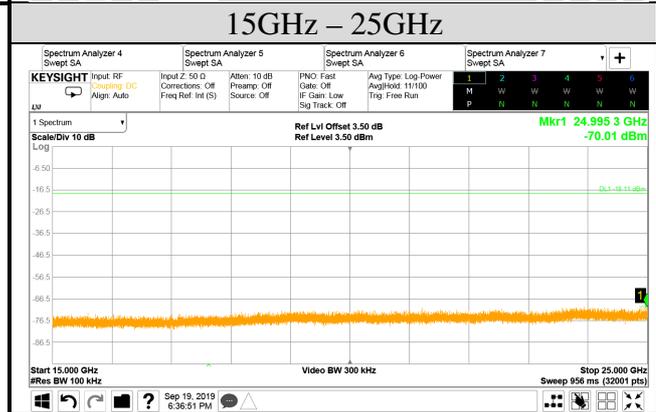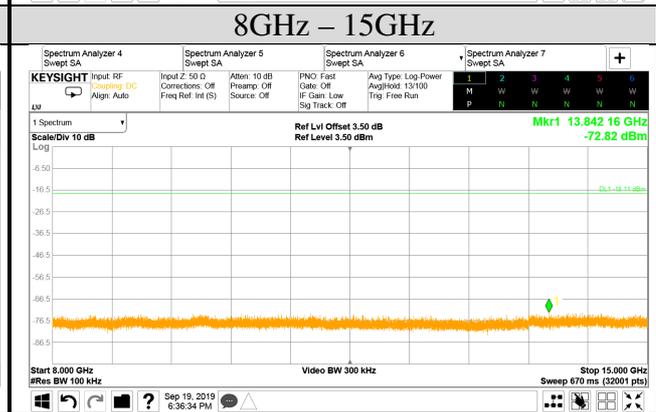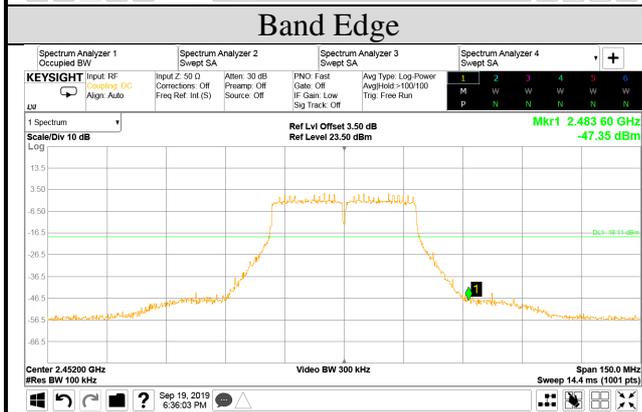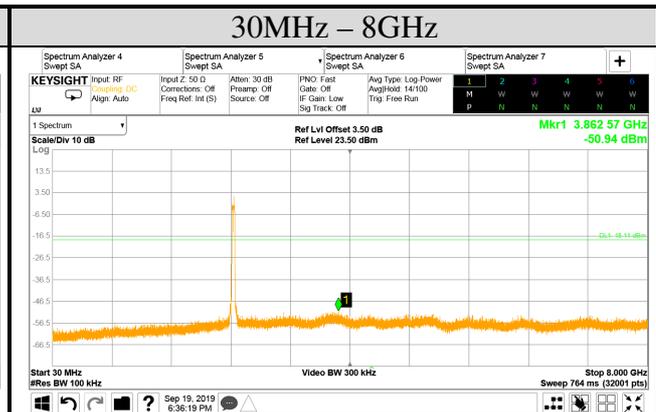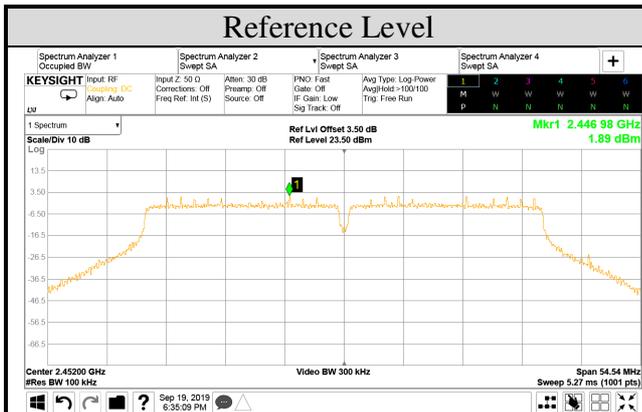

Test Date	2019/09/19	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Tested By	Martin Chen
Frequency	TX 2462MHz	Test Model	15Z90N
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

