


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	153
A.2.3 Emissions in Non-restricted Frequency Bands.....	168
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH	169
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	169
A.3.2 Measurement Plots	179
A.4 POWER SPECTRAL DENSITY	218
A.4.1 Power Spectral Density Result	218
A.4.2 Measurement Plots	227
A.5 FREQUENCY STABILITY	269
A.5.1 Frequency stability Result	269

A.1 CONDUCTED EMISSION

Test Date	2023/02/08	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Joe kuo

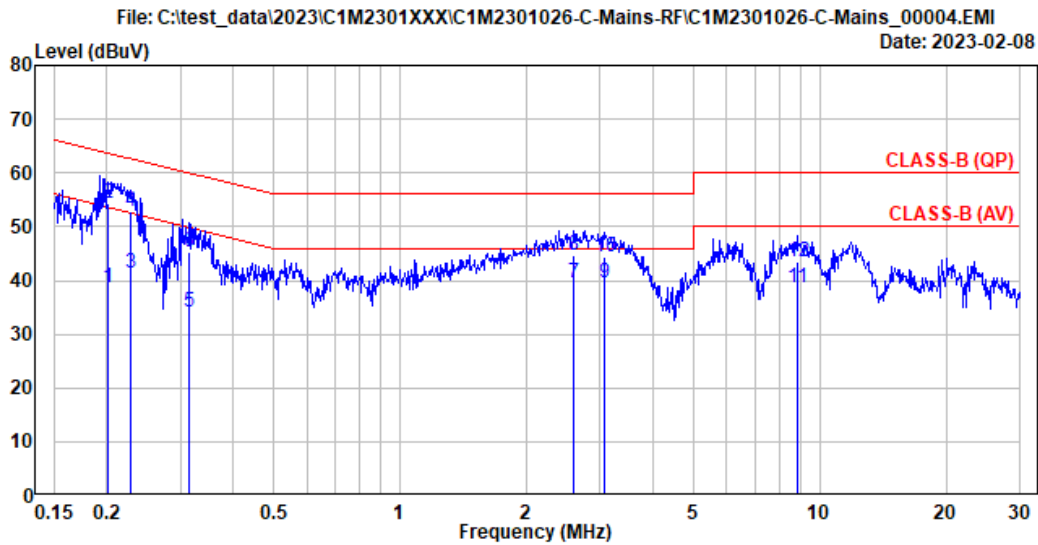

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 23°C/60%	Test Rating	: 120Vac/60Hz
EUT Model	: 15Z90RT	Engineer	: Joe_Kuo
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.201	10.32	0.03	9.85	18.32	38.52	53.56	15.04	Average
2	0.201	10.32	0.03	9.85	34.08	54.28	63.56	9.28	QP
3	0.229	10.32	0.03	9.85	21.23	41.43	52.48	11.05	Average
4	0.229	10.32	0.03	9.85	32.57	52.77	62.48	9.71	QP
5	0.315	10.32	0.03	9.85	13.93	34.13	49.83	15.70	Average
6	0.315	10.32	0.03	9.85	25.06	45.26	59.83	14.57	QP
7	2.596	10.38	0.07	9.86	19.35	39.66	46.00	6.34	Average
8	2.596	10.38	0.07	9.86	24.51	44.82	56.00	11.18	QP
9	3.060	10.38	0.07	9.86	19.31	39.62	46.00	6.38	Average
10	3.060	10.38	0.07	9.86	24.05	44.36	56.00	11.64	QP
11	8.847	10.60	0.13	9.88	17.91	38.52	50.00	11.48	Average
12	8.847	10.60	0.13	9.88	22.77	43.38	60.00	16.62	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2023/02/08	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Joe kuo

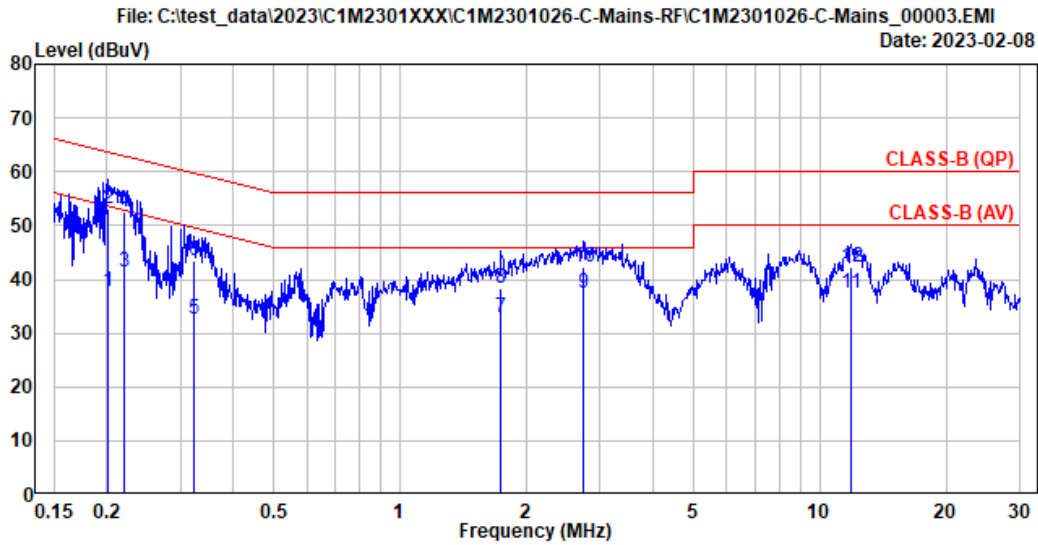

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 23°C/60%	Test Rating	: 120Vac/60Hz
EUT Model	: 15Z90RT	Engineer	: Joe_Kuo
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.202	10.22	0.03	9.85	17.67	37.77	53.52	15.75	Average
2	0.202	10.22	0.03	9.85	33.07	53.17	63.52	10.35	QP
3	0.220	10.22	0.03	9.85	21.13	41.23	52.81	11.58	Average
4	0.220	10.22	0.03	9.85	32.37	52.47	62.81	10.34	QP
5	0.322	10.22	0.03	9.85	12.46	32.56	49.67	17.11	Average
6	0.322	10.22	0.03	9.85	23.50	43.60	59.67	16.07	QP
7	1.742	10.25	0.06	9.86	12.81	32.98	46.00	13.02	Average
8	1.742	10.25	0.06	9.86	18.25	38.42	56.00	17.58	QP
9	2.742	10.26	0.07	9.86	17.21	37.40	46.00	8.60	Average
10	2.742	10.26	0.07	9.86	22.19	42.38	56.00	13.62	QP
11	11.871	10.47	0.15	9.90	16.76	37.28	50.00	12.72	Average
12	11.871	10.47	0.15	9.90	21.63	42.15	60.00	17.85	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2023/01/31 ~ 02/08	Temp./Hum.	16 ~ 20°C/60 ~ 77%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.88	1.46	26.49	34.79	32.64	40.00	7.36	Peak
113.420	17.66	2.78	26.20	32.41	26.65	43.50	16.85	Peak
154.160	16.66	3.24	25.98	38.51	32.44	43.50	11.06	Peak
404.420	21.71	5.97	26.47	32.51	33.72	46.00	12.28	Peak
489.780	23.32	6.68	27.07	32.96	35.90	46.00	10.10	Peak
609.090	24.43	7.15	27.40	32.12	36.29	46.00	9.71	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	22.50	1.50	0.00	14.15	38.16	40.00	1.84	QP
49.400	14.45	1.82	26.46	47.41	37.22	40.00	2.78	Peak
150.280	16.87	3.20	26.00	38.70	32.78	43.50	10.72	Peak
319.060	19.80	4.96	25.79	31.26	30.23	46.00	15.77	Peak
399.570	21.62	5.93	26.44	33.14	34.25	46.00	11.75	Peak
483.960	23.22	6.64	27.03	33.54	36.37	46.00	9.63	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

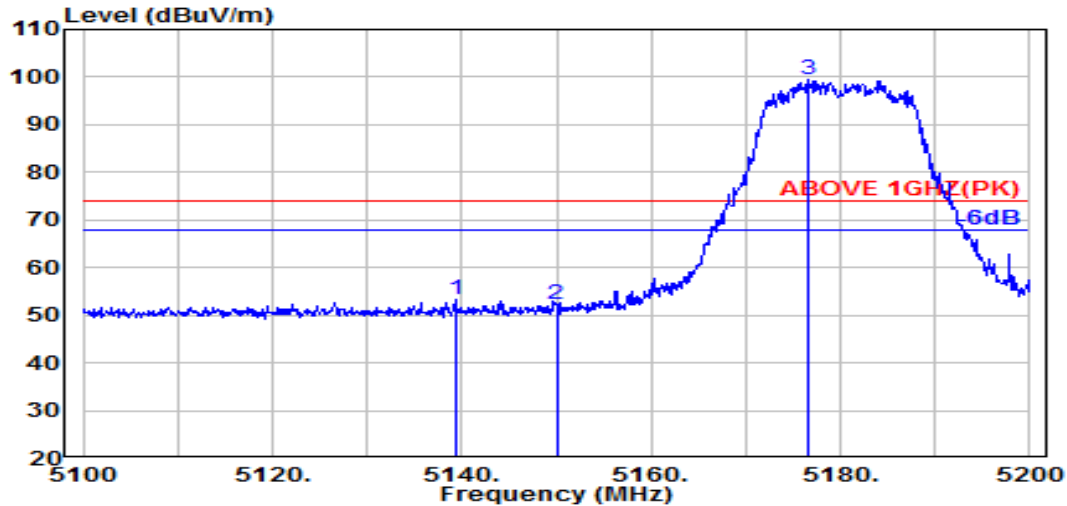

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.300	34.44	8.88	34.34	44.16	53.13	74.00	20.87	Peak
5150.000	34.50	8.89	34.34	43.07	52.12	74.00	21.88	Peak
@ 5176.500	34.61	8.90	34.33	90.14	99.32	---	---	Peak

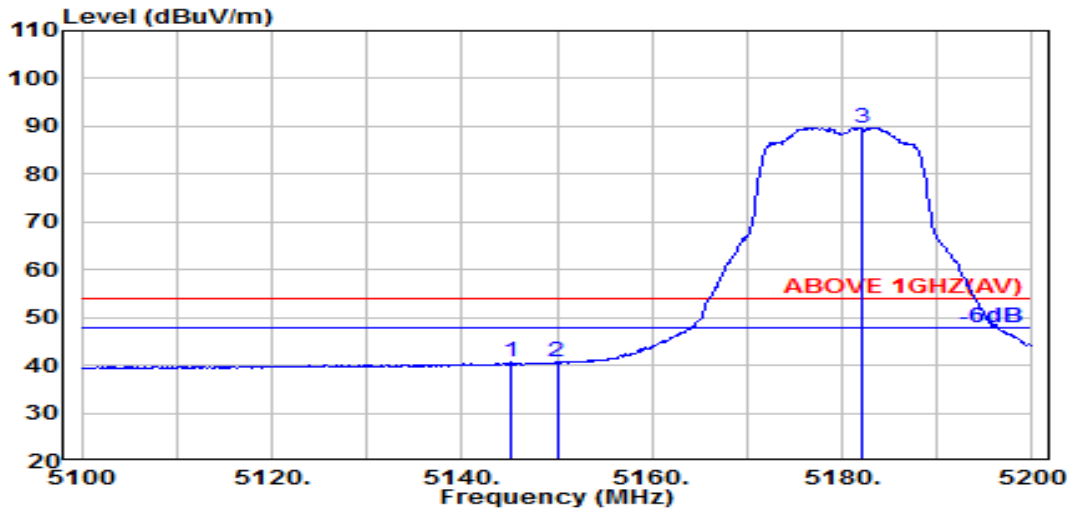


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.100	34.47	8.88	34.34	31.54	40.55	54.00	13.45	Average
5150.000	34.50	8.89	34.34	31.64	40.69	54.00	13.31	Average
@ 5182.000	34.63	8.90	34.32	80.53	89.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

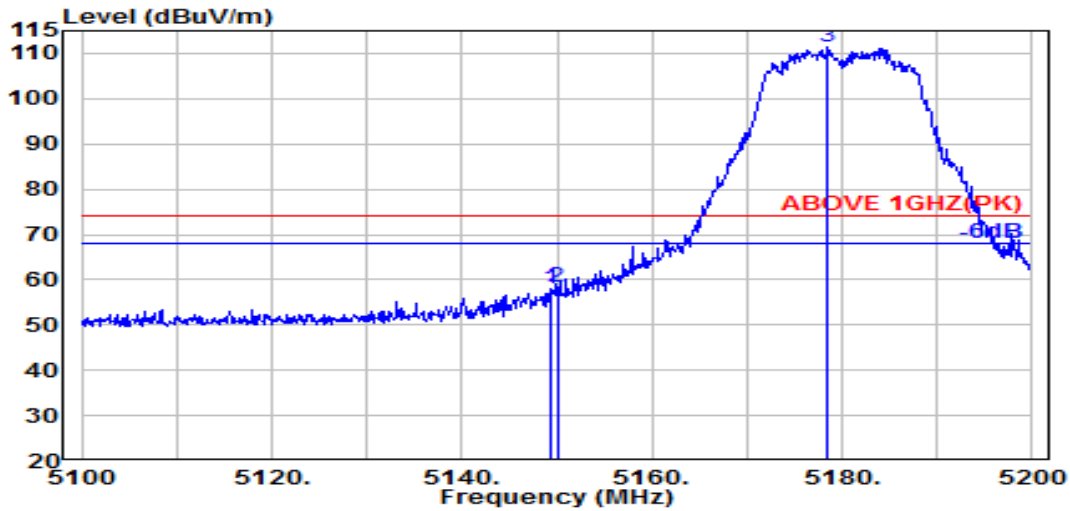

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.50	8.89	34.34	48.91	57.96	74.00	16.04	Peak
5150.000	34.50	8.89	34.34	49.32	58.37	74.00	15.63	Peak
@ 5178.400	34.61	8.90	34.33	102.06	111.25	---	---	Peak

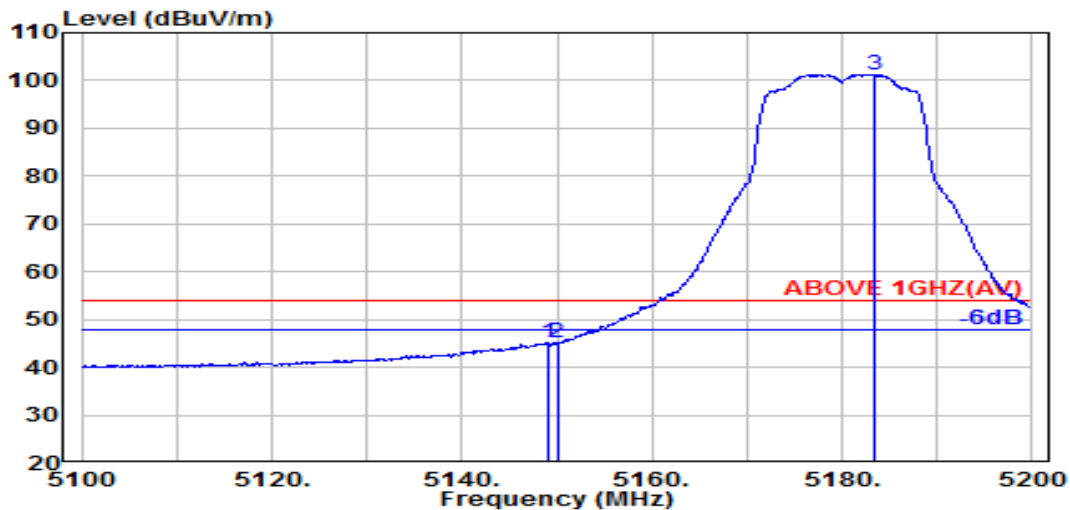


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.49	8.89	34.34	36.03	45.07	54.00	8.93	Average
5150.000	34.50	8.89	34.34	36.03	45.08	54.00	8.92	Average
@ 5183.400	34.63	8.90	34.32	92.09	101.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

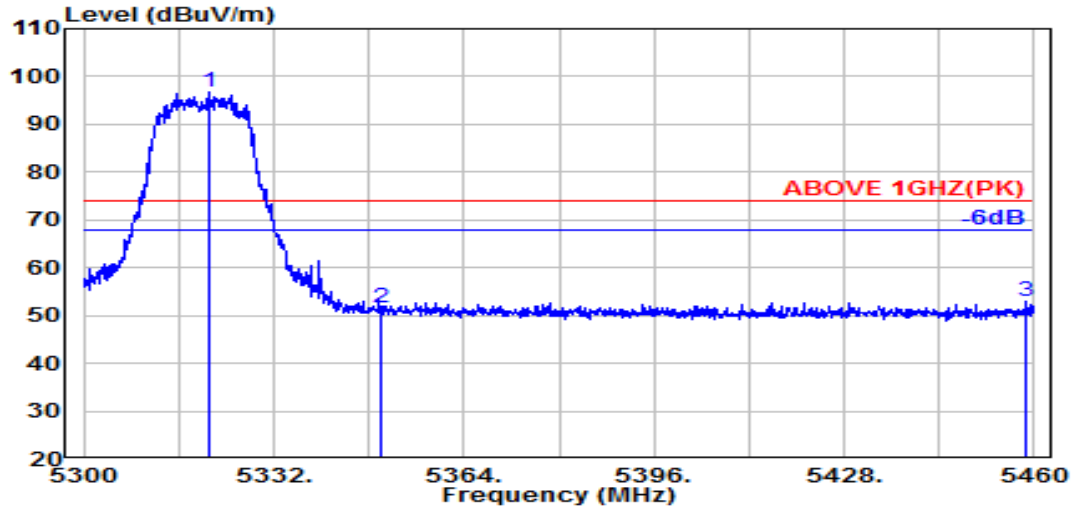

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.100	34.61	8.98	34.27	87.27	96.60	---	---	Peak
5350.000	34.90	9.00	34.26	41.79	51.42	74.00	22.58	Peak
5458.600	34.62	9.06	34.22	43.33	52.78	74.00	21.22	Peak

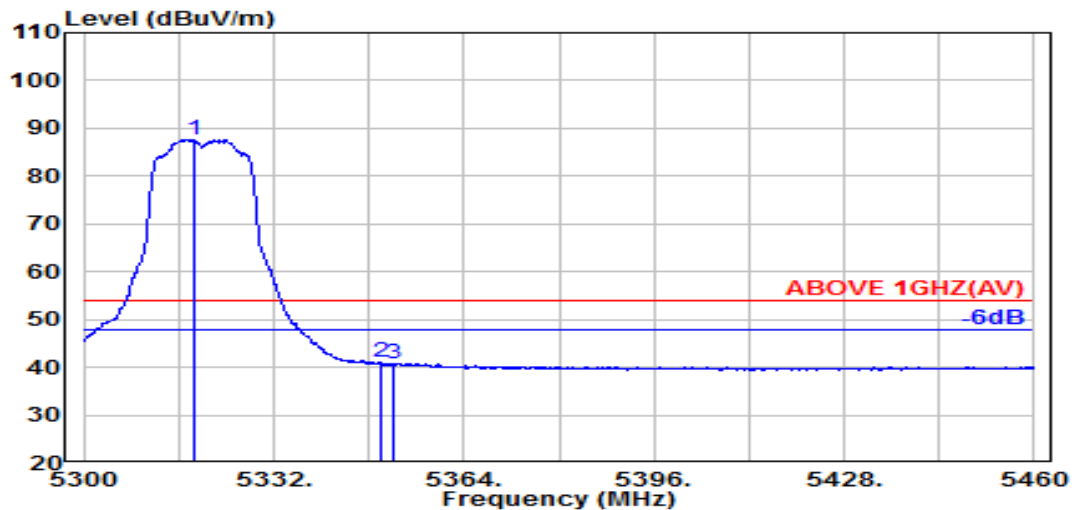


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.500	34.59	8.98	34.27	78.42	87.71	---	---	Average
5350.000	34.90	9.00	34.26	31.42	41.06	54.00	12.94	Average
5352.300	34.90	9.00	34.26	31.16	40.80	54.00	13.20	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

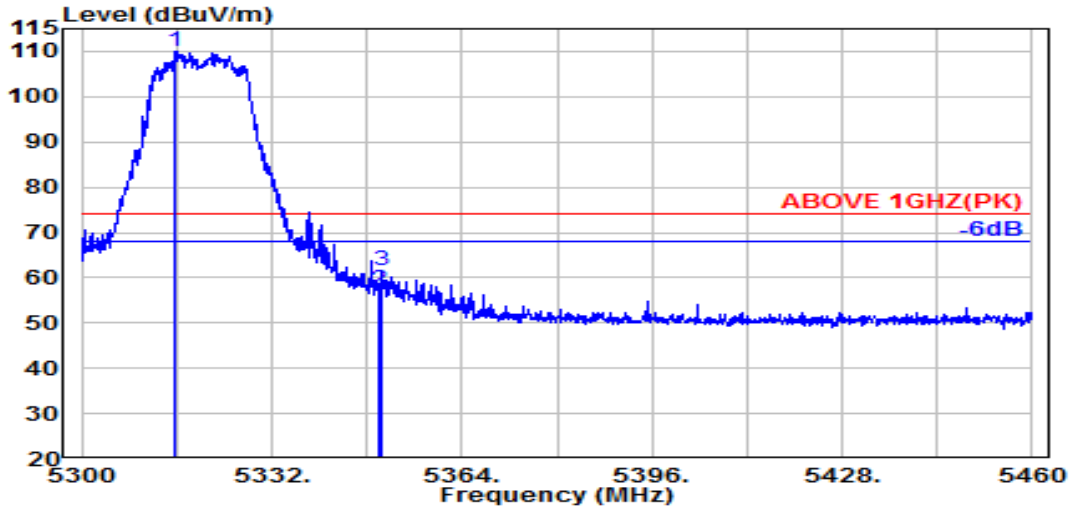

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.800	34.56	8.98	34.27	100.71	109.97	---	---	Peak
5350.000	34.90	9.00	34.26	47.59	57.23	74.00	16.77	Peak
5350.600	34.90	9.00	34.26	51.92	61.56	74.00	12.44	Peak

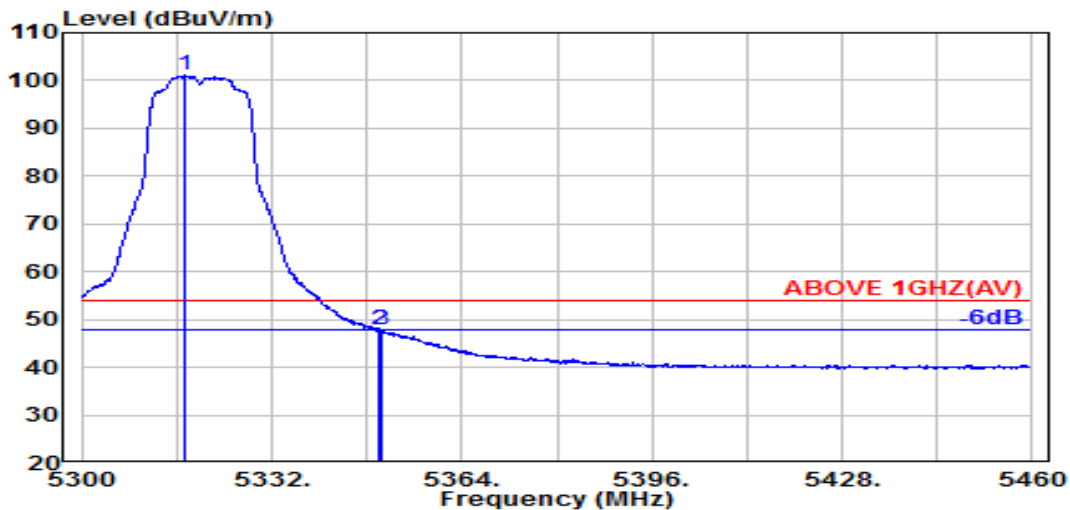


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.500	34.58	8.98	34.27	91.76	101.05	---	---	Average
5350.000	34.90	9.00	34.26	38.18	47.81	54.00	6.19	Average
5350.600	34.90	9.00	34.26	38.25	47.88	54.00	6.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

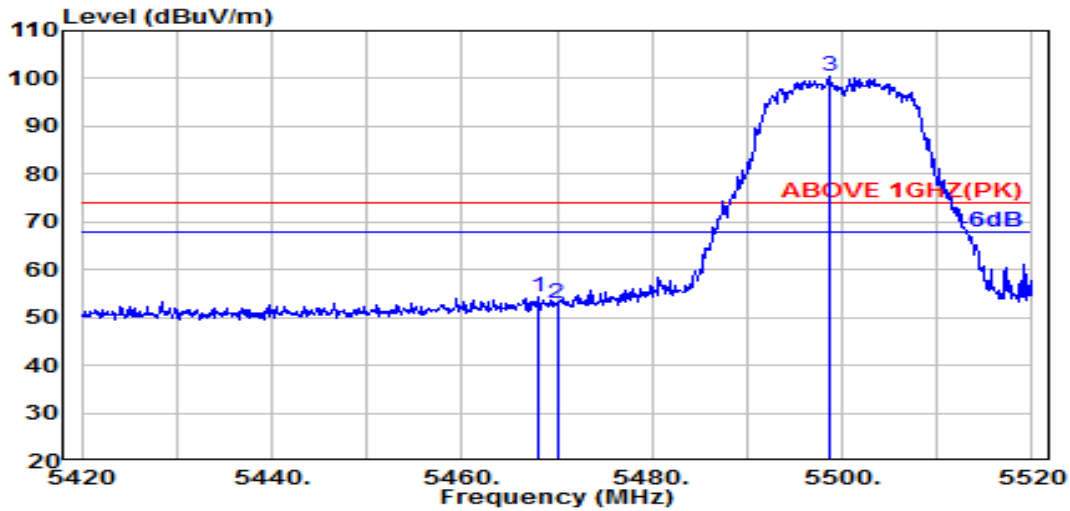

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.64	9.06	34.21	44.88	54.36	74.00	19.64	Peak
5470.000	34.64	9.06	34.21	43.33	52.82	74.00	21.18	Peak
@ 5498.600	34.70	9.08	34.20	90.99	100.57	---	---	Peak

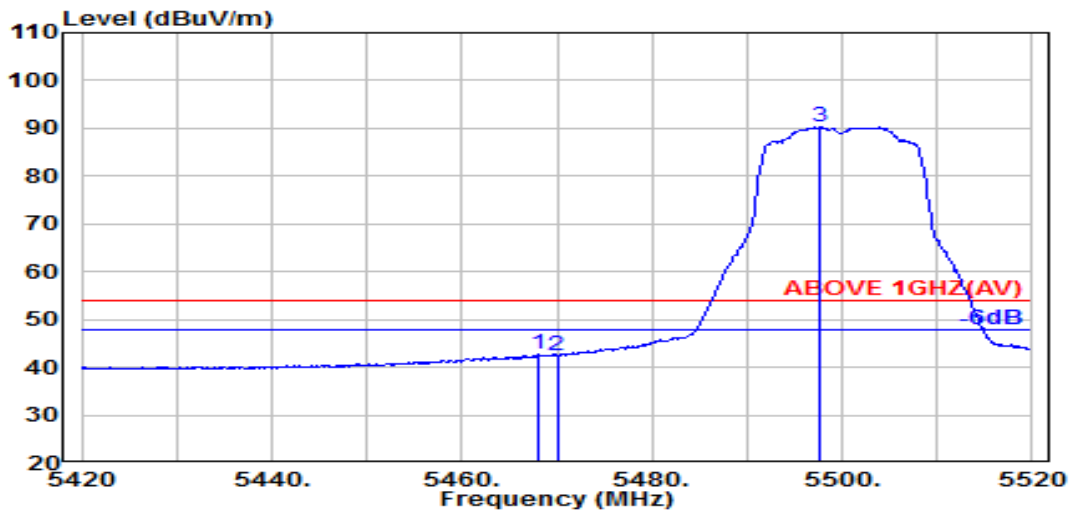


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.64	9.06	34.21	33.11	42.59	54.00	11.41	Average
5470.000	34.64	9.06	34.21	33.04	42.53	54.00	11.47	Average
@ 5497.700	34.70	9.08	34.20	80.68	90.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

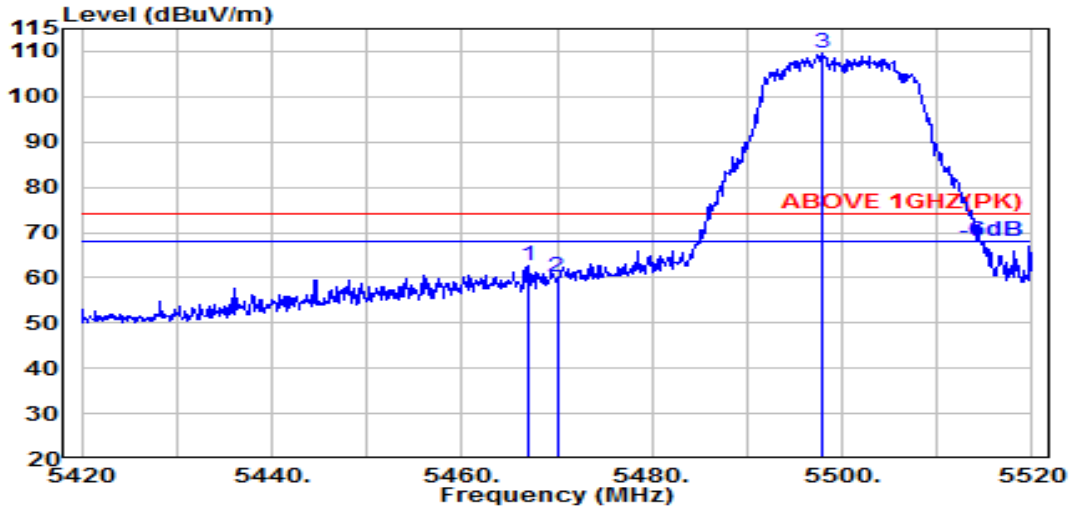

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.63	9.06	34.21	53.10	62.58	74.00	11.42	Peak
5470.000	34.64	9.06	34.21	50.57	60.06	74.00	13.94	Peak
@ 5498.000	34.70	9.08	34.20	99.94	109.52	---	---	Peak

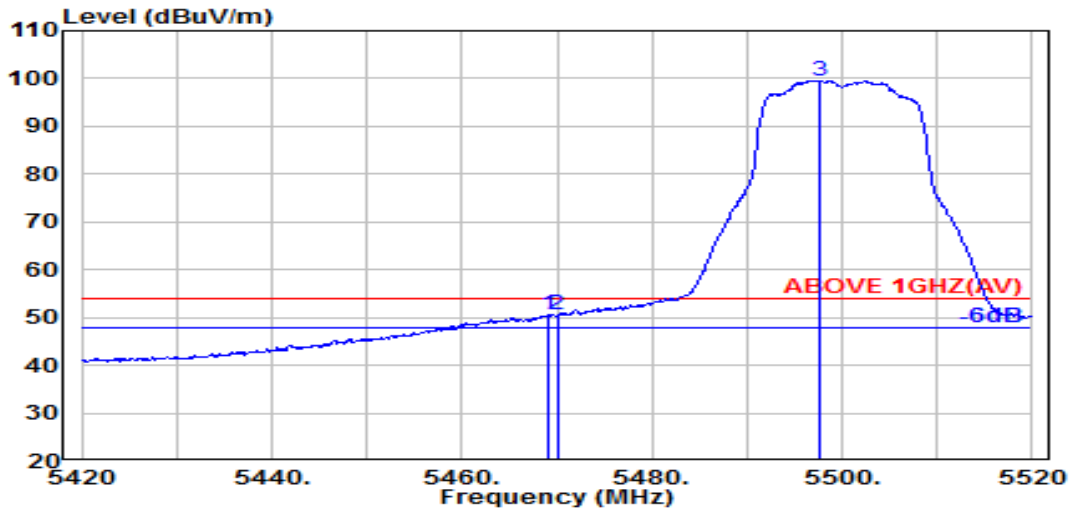


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	41.07	50.55	54.00	3.45	Average
5470.000	34.64	9.06	34.21	40.91	50.40	54.00	3.60	Average
@ 5497.700	34.70	9.08	34.20	90.04	99.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

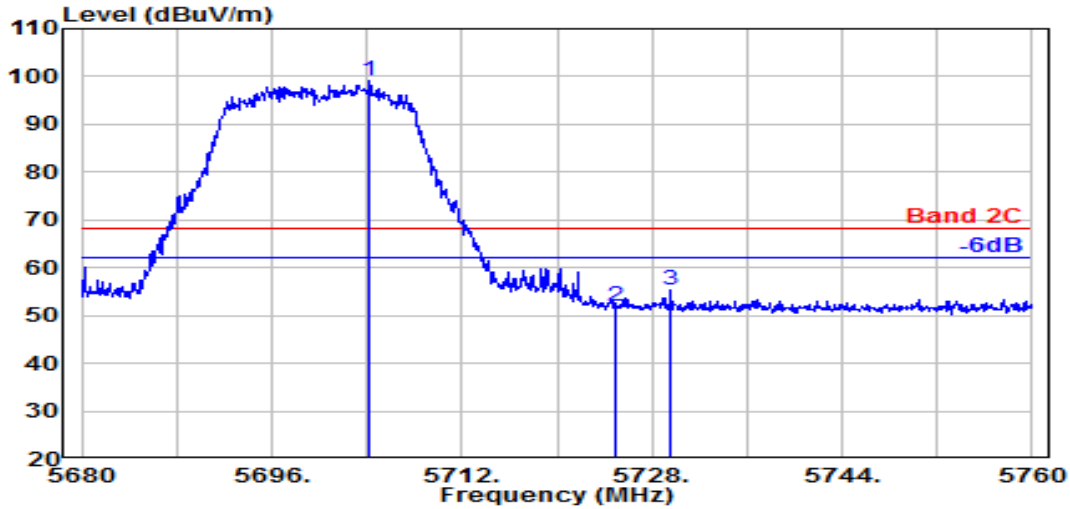

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.240	34.73	9.18	34.30	89.47	99.08	---	---	Peak
5725.000	34.85	9.19	34.31	42.11	51.85	68.20	16.35	Peak
5729.600	34.88	9.20	34.31	45.67	55.43	68.20	12.77	Peak

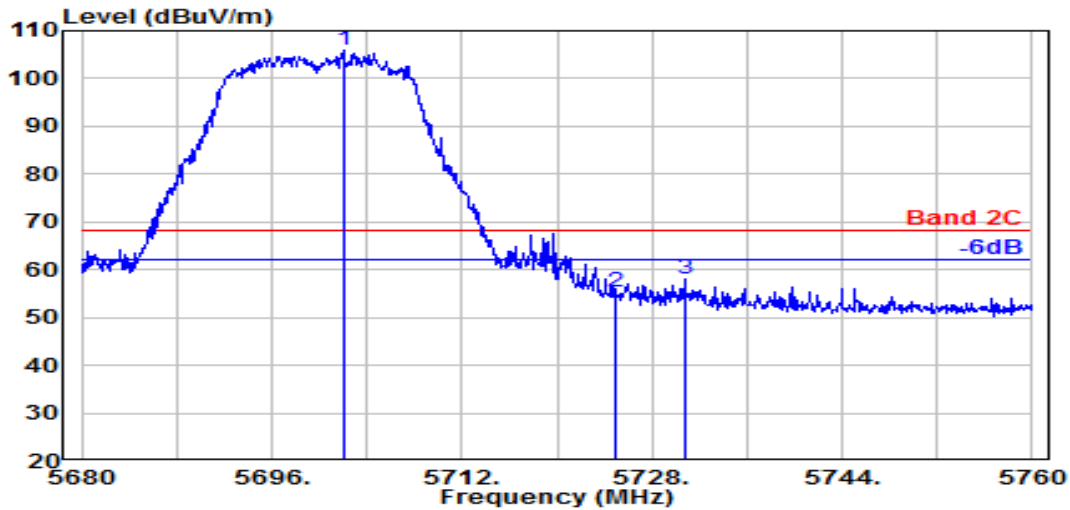


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.000	34.71	9.18	34.30	96.19	105.79	---	---	Peak
5725.000	34.85	9.19	34.31	45.69	55.43	68.20	12.77	Peak
5730.720	34.88	9.20	34.31	48.36	58.13	68.20	10.07	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

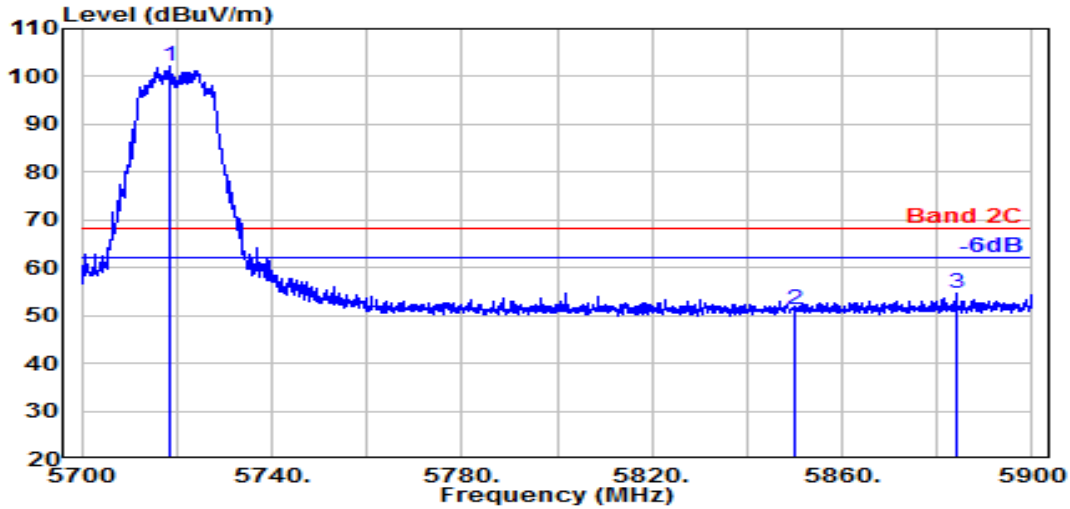

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.300	34.81	9.19	34.30	92.35	102.05	---	---	Peak
5850.000	35.40	9.26	34.36	41.03	51.32	68.20	16.88	Peak
5884.200	35.67	9.27	34.38	44.10	54.66	68.20	13.54	Peak

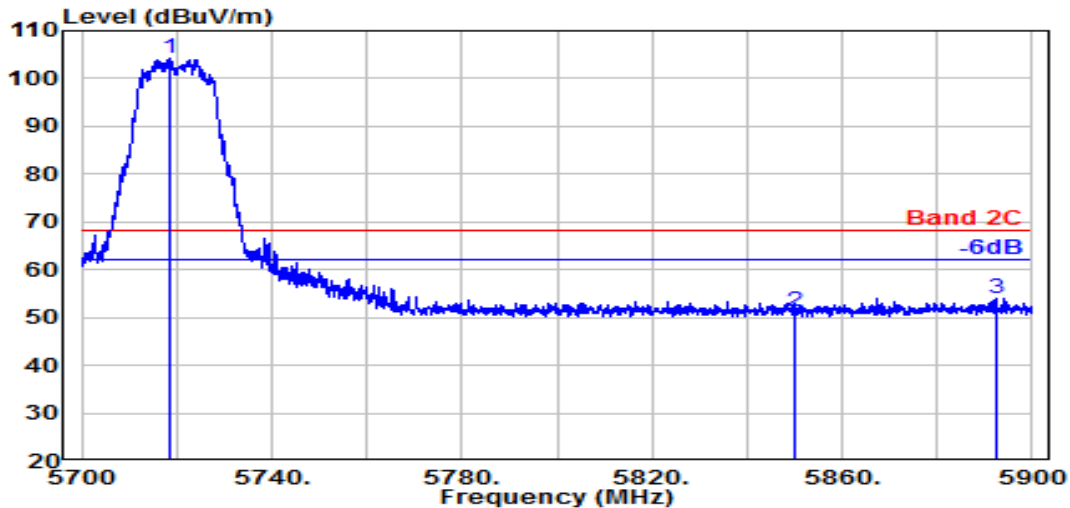


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.300	34.81	9.19	34.30	94.39	104.09	---	---	Peak
5850.000	35.40	9.26	34.36	40.93	51.23	68.20	16.97	Peak
5892.500	35.74	9.28	34.38	43.35	53.98	68.20	14.22	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

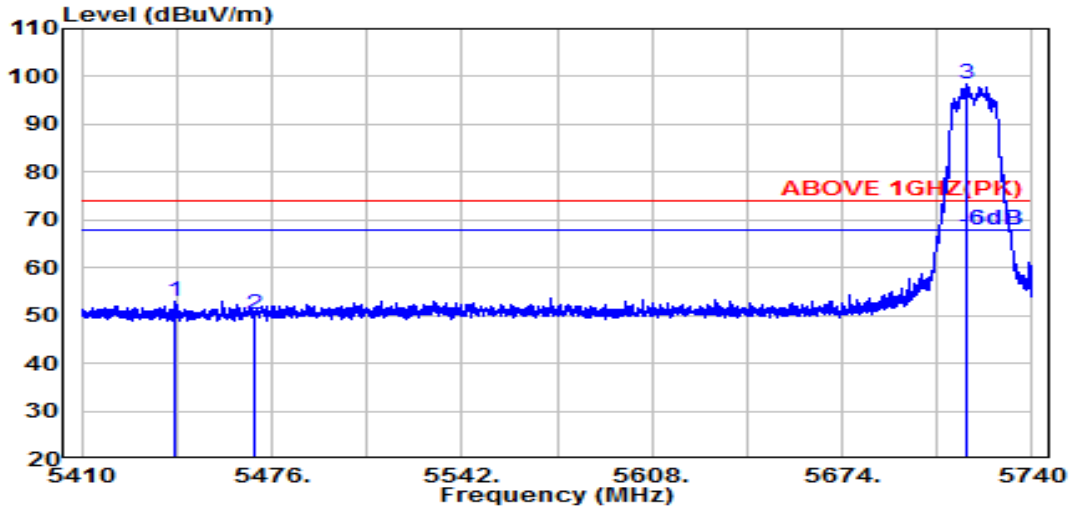

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.700	34.63	9.05	34.22	43.51	52.97	74.00	21.03	Peak
5470.000	34.64	9.06	34.21	40.66	50.15	74.00	23.85	Peak
@ 5717.600	34.81	9.19	34.30	88.62	98.31	---	---	Peak

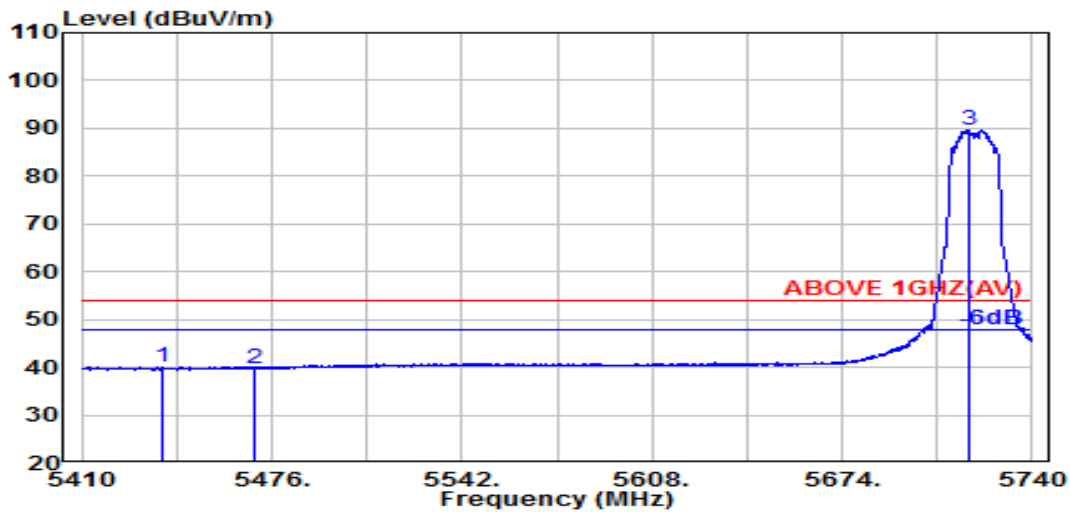


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.000	34.65	9.04	34.22	30.66	40.13	54.00	13.87	Average
5470.000	34.64	9.06	34.21	30.28	39.77	54.00	14.23	Average
@ 5717.900	34.81	9.19	34.30	80.06	89.75	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

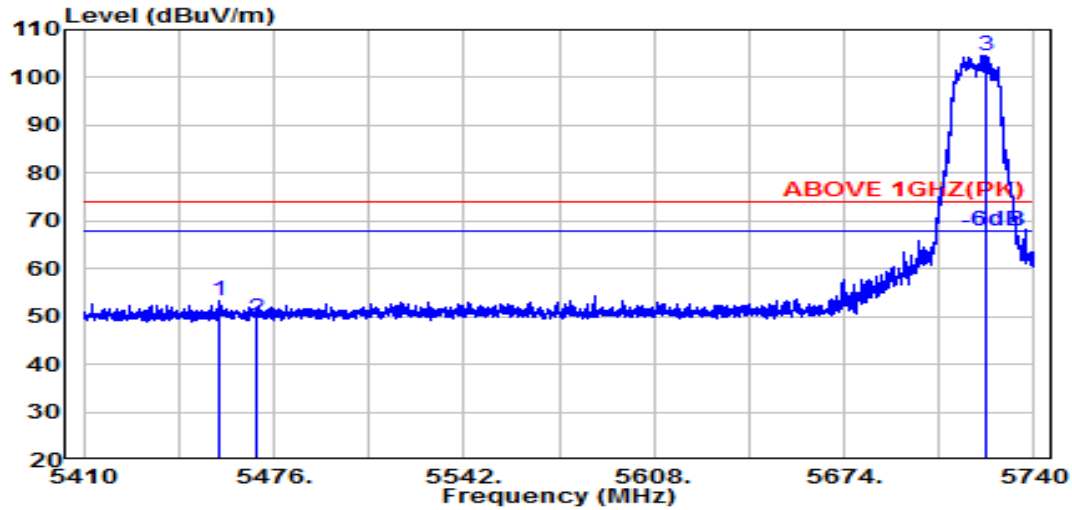

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.300	34.61	9.05	34.22	43.93	53.39	74.00	20.61	Peak
5470.000	34.64	9.06	34.21	40.13	49.62	74.00	24.38	Peak
@ 5723.100	34.84	9.19	34.31	94.94	104.67	---	---	Peak

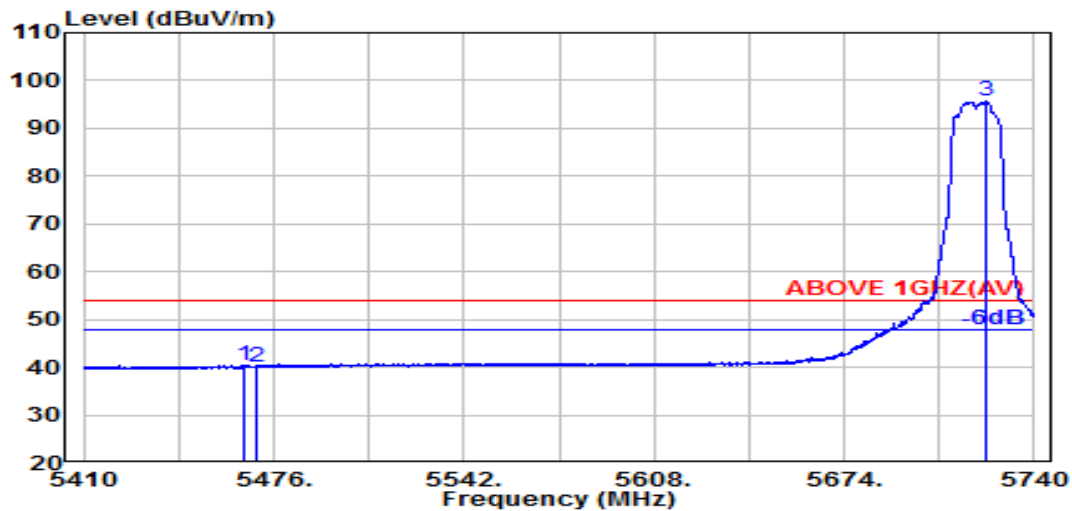


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.63	9.06	34.21	30.89	40.37	54.00	13.63	Average
5470.000	34.64	9.06	34.21	30.71	40.20	54.00	13.80	Average
@ 5723.300	34.84	9.19	34.31	85.88	95.61	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

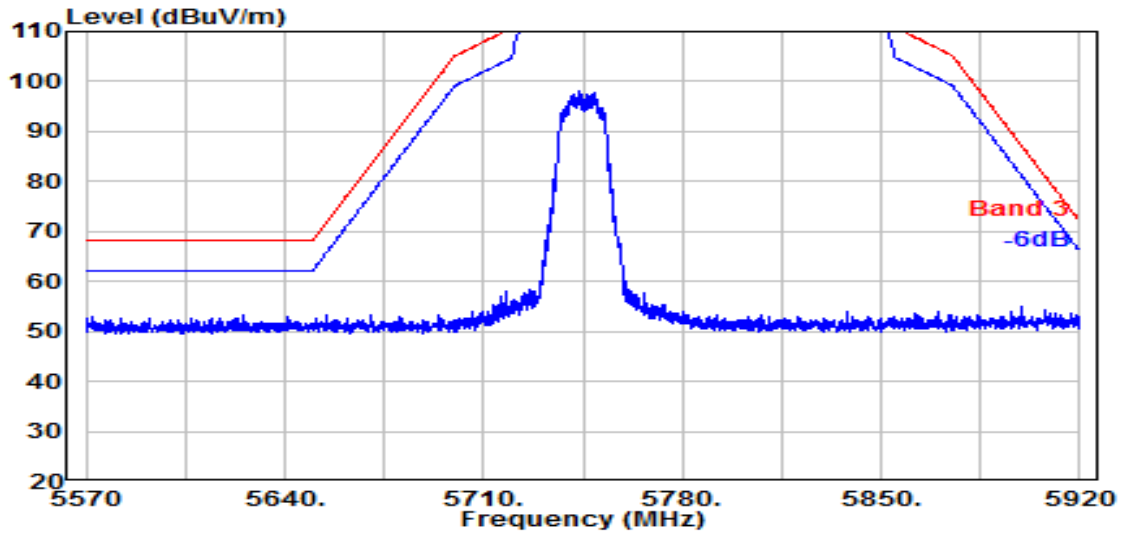


Antenna at Vertical Polarization

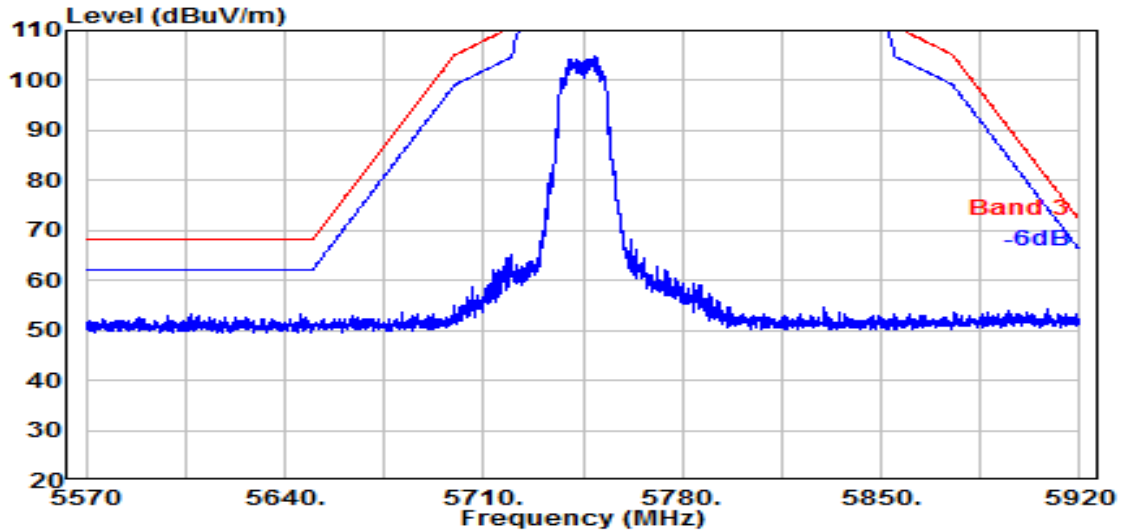


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

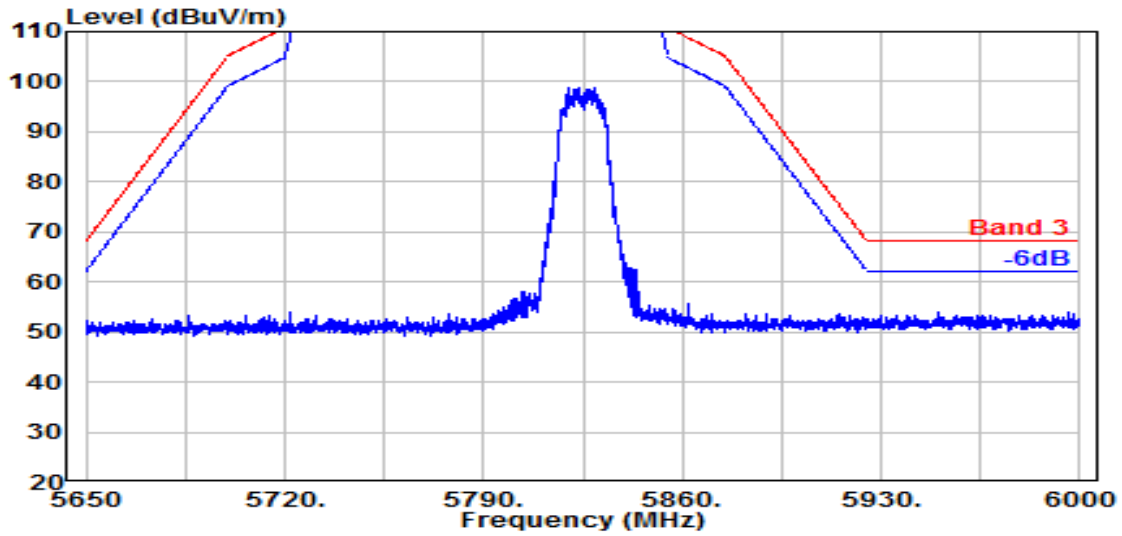

Antenna at Vertical Polarization

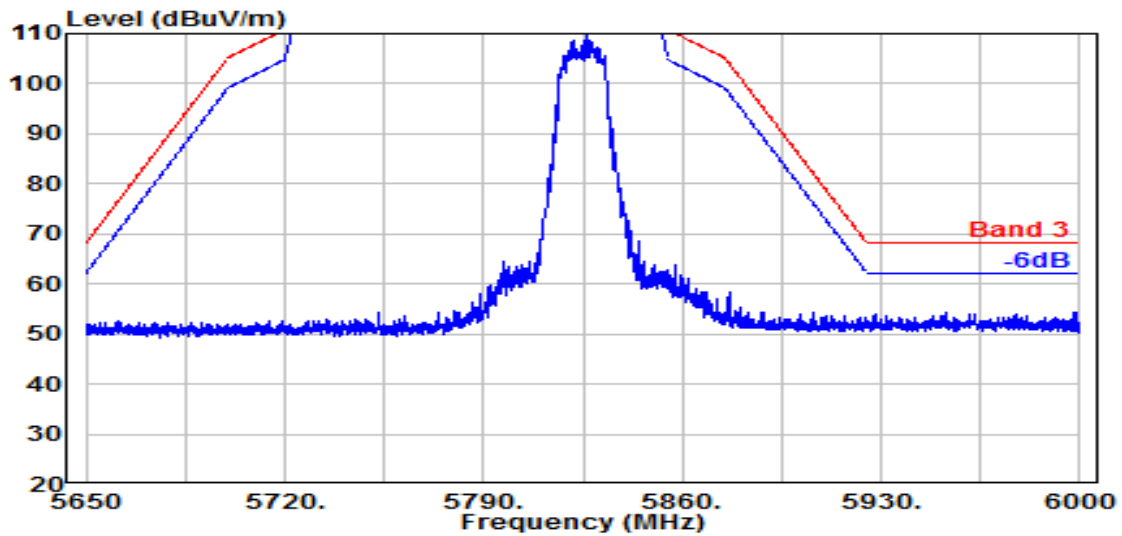


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

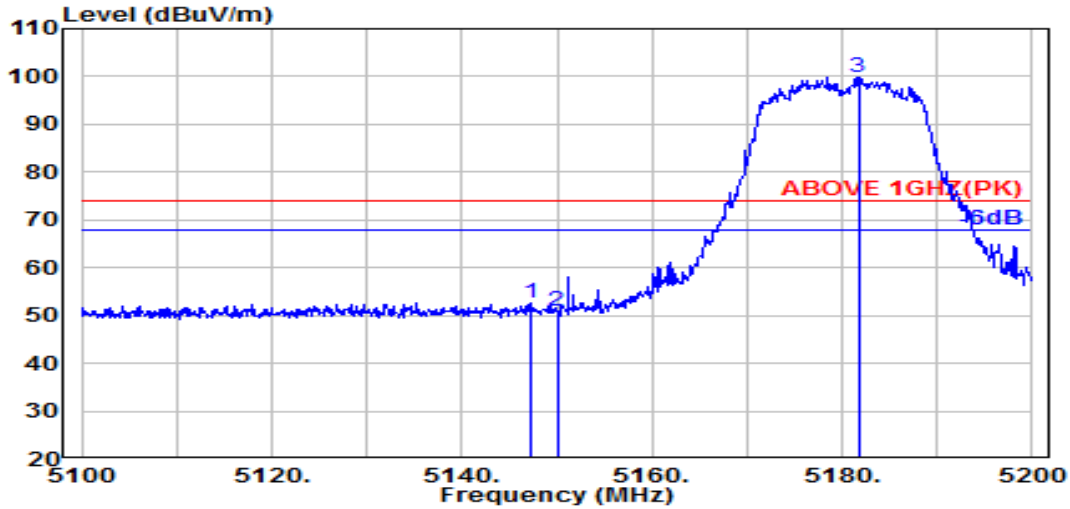

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	34.48	8.88	34.34	43.42	52.45	74.00	21.55	Peak
5150.000	34.50	8.89	34.34	41.81	50.86	74.00	23.14	Peak
@ 5181.700	34.63	8.90	34.33	90.54	99.75	---	---	Peak

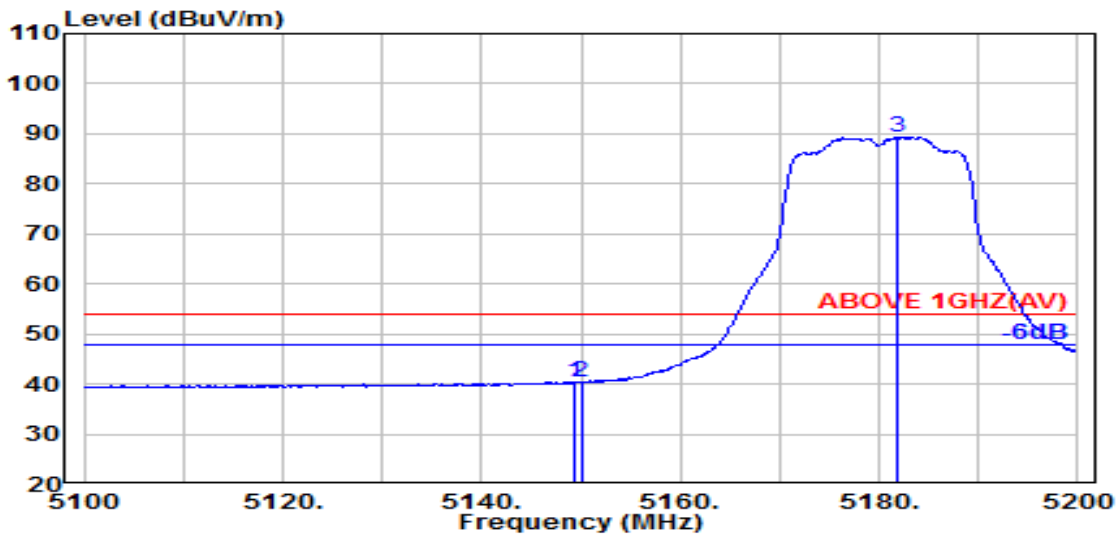


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.50	8.89	34.34	31.28	40.33	54.00	13.67	Average
5150.000	34.50	8.89	34.34	31.28	40.33	54.00	13.67	Average
@ 5181.800	34.63	8.90	34.33	80.17	89.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

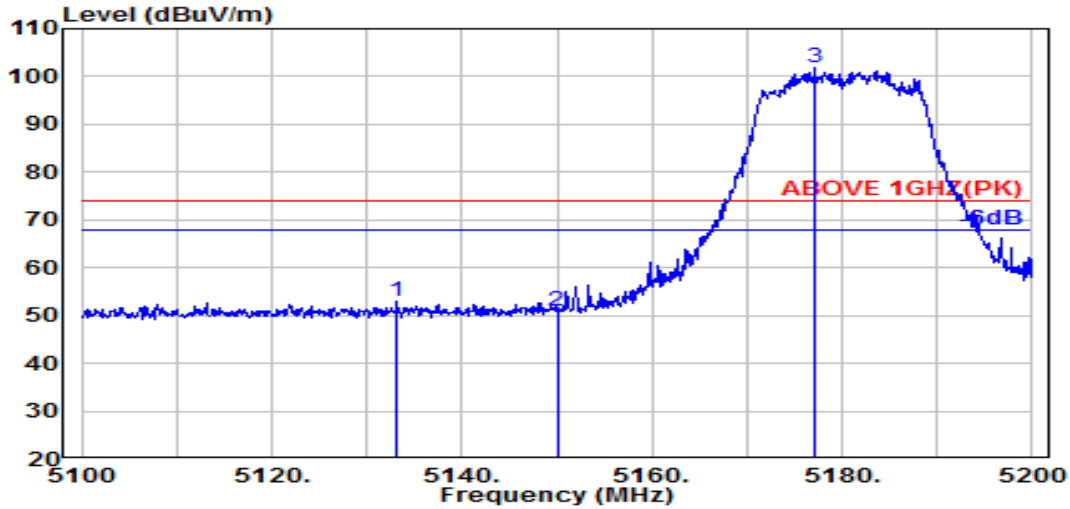

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.200	34.40	8.88	34.34	43.91	52.84	74.00	21.16	Peak
5150.000	34.50	8.89	34.34	41.78	50.83	74.00	23.17	Peak
@ 5177.100	34.61	8.90	34.33	92.73	101.91	---	---	Peak

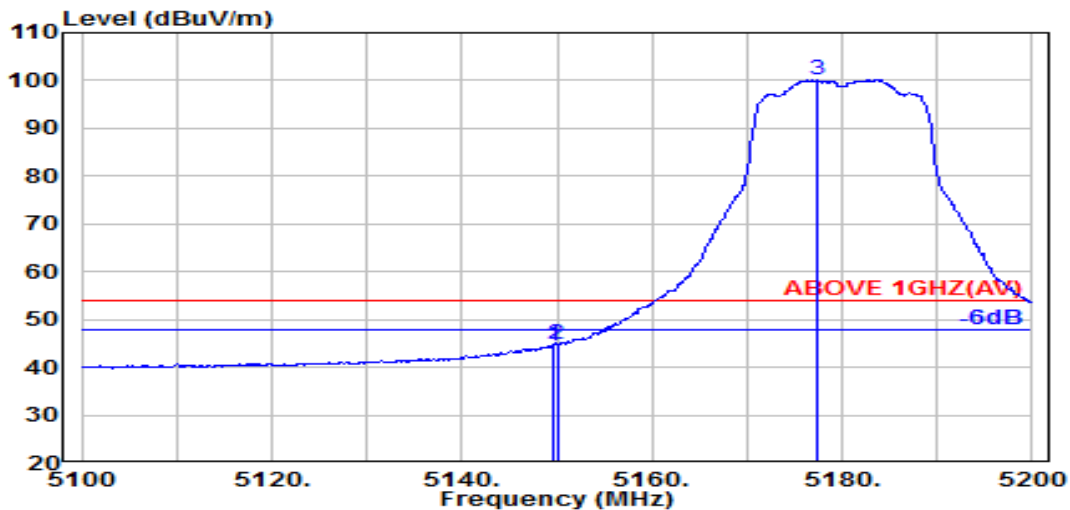


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	35.53	44.58	54.00	9.42	Average
5150.000	34.50	8.89	34.34	35.73	44.78	54.00	9.22	Average
@ 5177.500	34.61	8.90	34.33	90.94	100.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

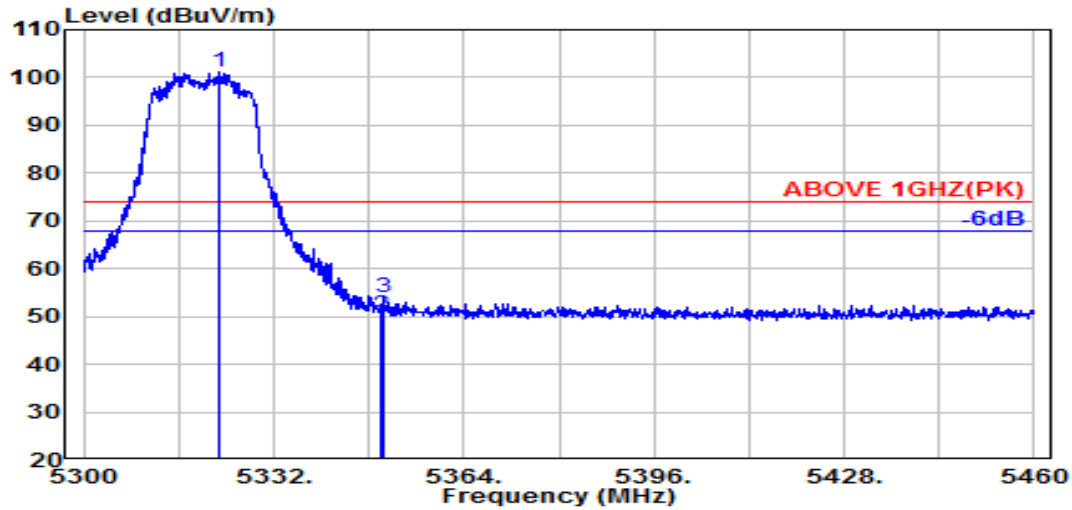

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	34.63	8.98	34.27	91.94	101.28	---	---	Peak
5350.000	34.90	9.00	34.26	40.74	50.38	74.00	23.62	Peak
5350.400	34.90	9.00	34.26	44.18	53.82	74.00	20.18	Peak

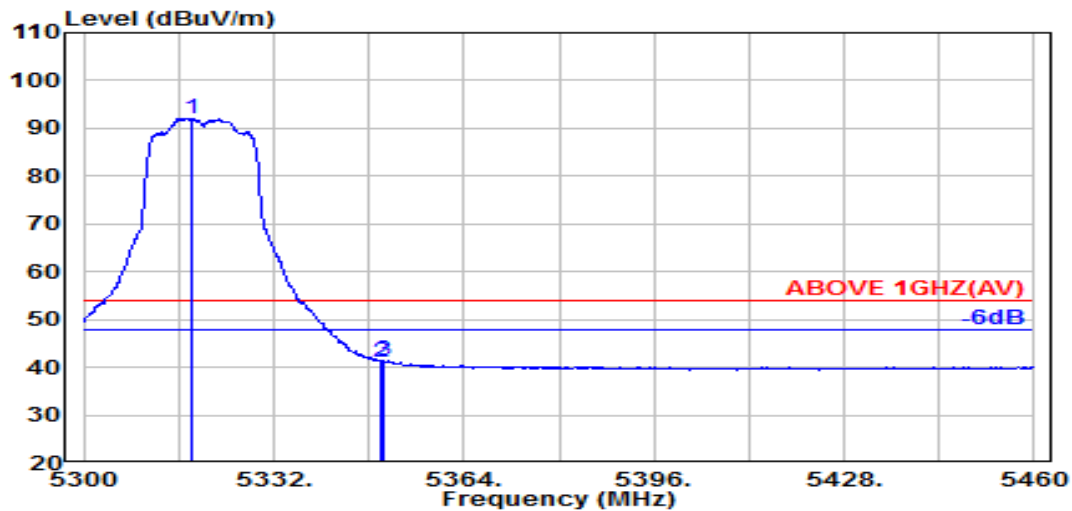


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	34.58	8.98	34.27	82.71	92.00	---	---	Average
5350.000	34.90	9.00	34.26	31.50	41.14	54.00	12.86	Average
5350.500	34.90	9.00	34.26	31.76	41.40	54.00	12.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

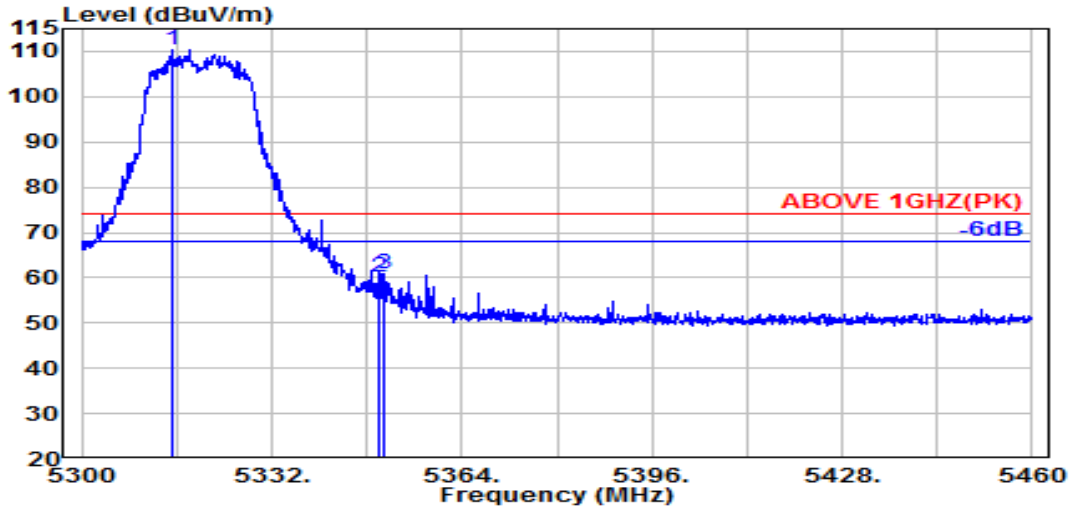

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.400	34.55	8.98	34.27	101.21	110.47	---	---	Peak
5350.000	34.90	9.00	34.26	50.46	60.10	74.00	13.90	Peak
5350.700	34.90	9.00	34.26	51.10	60.74	74.00	13.26	Peak

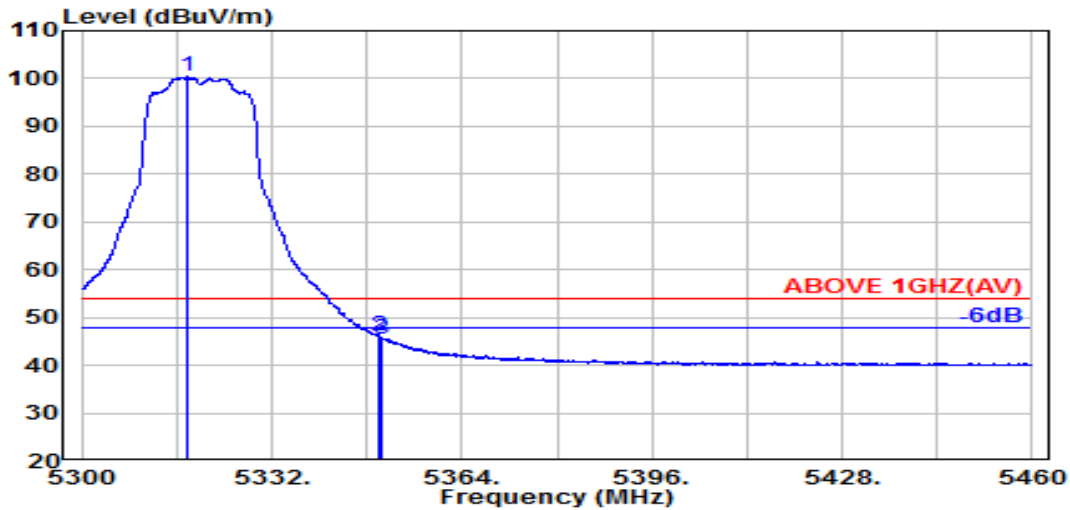


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	34.58	8.98	34.27	91.09	100.37	---	---	Average
5350.000	34.90	9.00	34.26	36.66	46.29	54.00	7.71	Average
5350.400	34.90	9.00	34.26	35.98	45.62	54.00	8.38	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

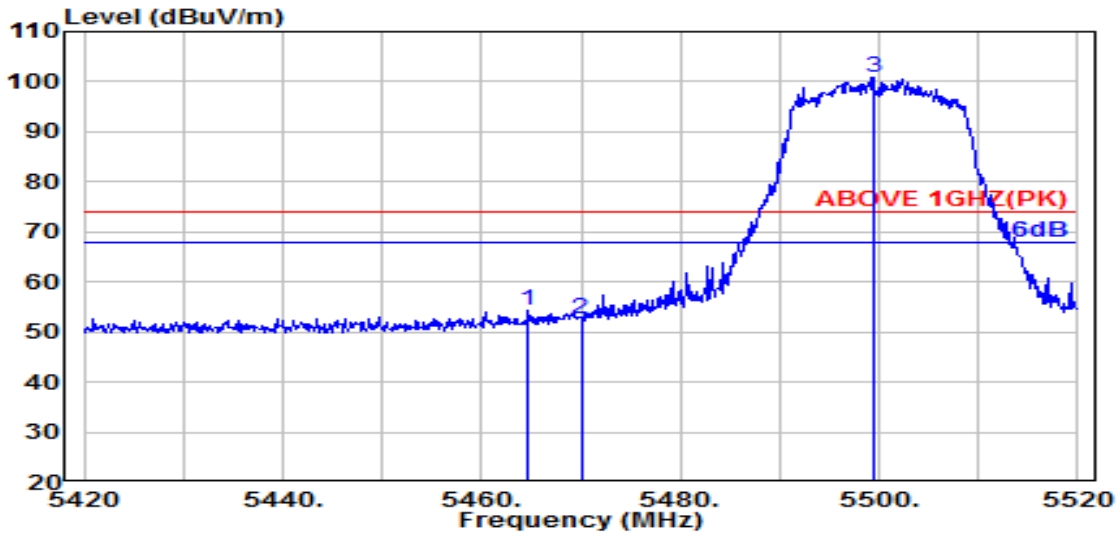

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.63	9.06	34.21	44.93	54.41	74.00	19.59	Peak
5470.000	34.64	9.06	34.21	43.22	52.71	74.00	21.29	Peak
@ 5499.500	34.70	9.08	34.20	91.36	100.93	---	---	Peak

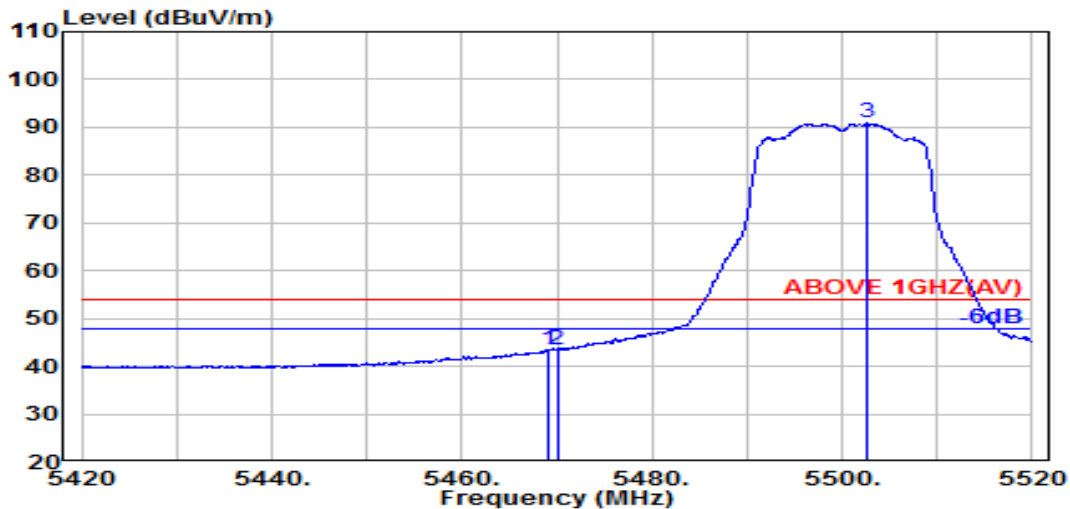


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	33.83	43.32	54.00	10.68	Average
5470.000	34.64	9.06	34.21	34.09	43.58	54.00	10.42	Average
@ 5502.600	34.70	9.08	34.20	81.24	90.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

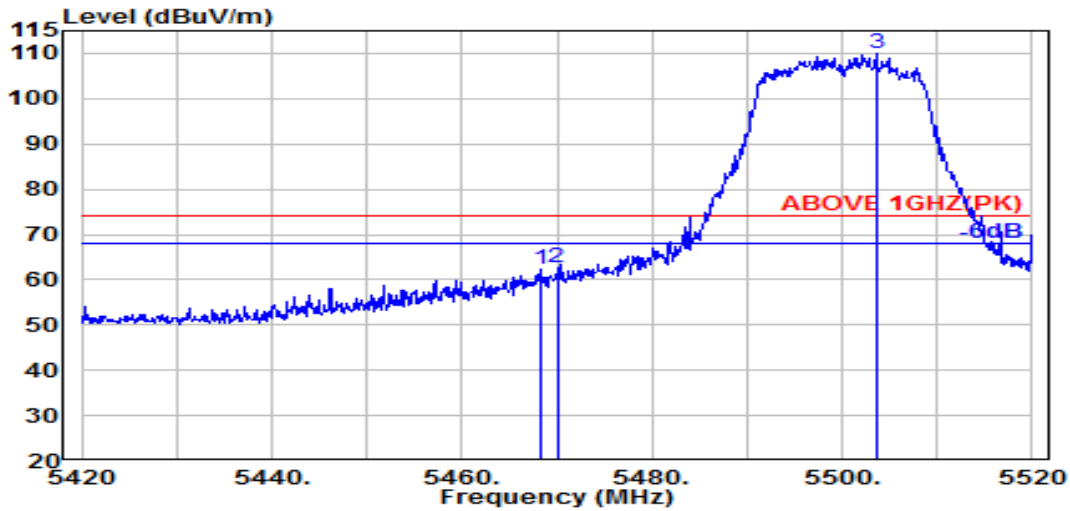

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.64	9.06	34.21	52.75	62.24	74.00	11.76	Peak
5470.000	34.64	9.06	34.21	53.23	62.72	74.00	11.28	Peak
@ 5503.600	34.70	9.08	34.20	100.25	109.83	---	---	Peak

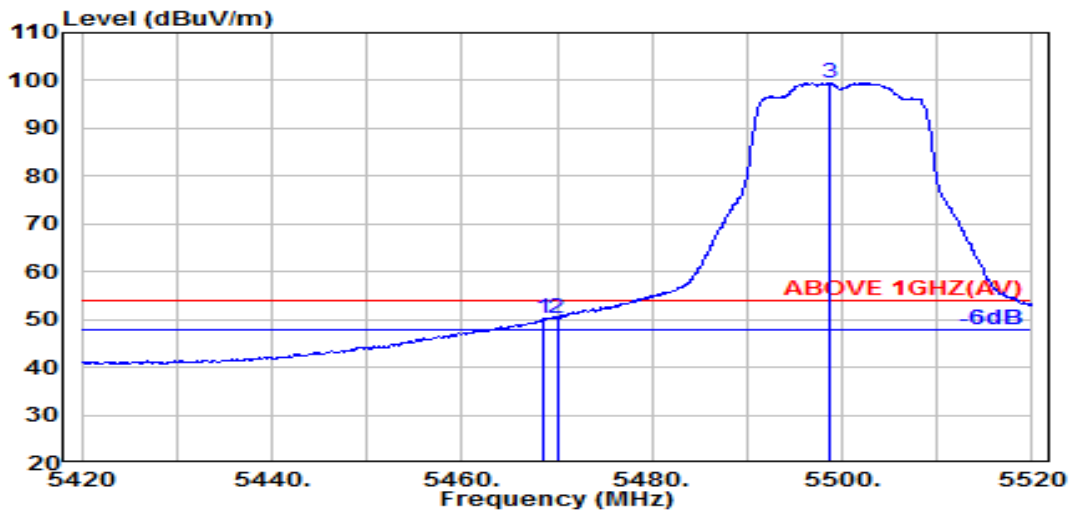


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.64	9.06	34.21	40.78	50.26	54.00	3.74	Average
5470.000	34.64	9.06	34.21	40.82	50.31	54.00	3.69	Average
@ 5498.700	34.70	9.08	34.20	89.94	99.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

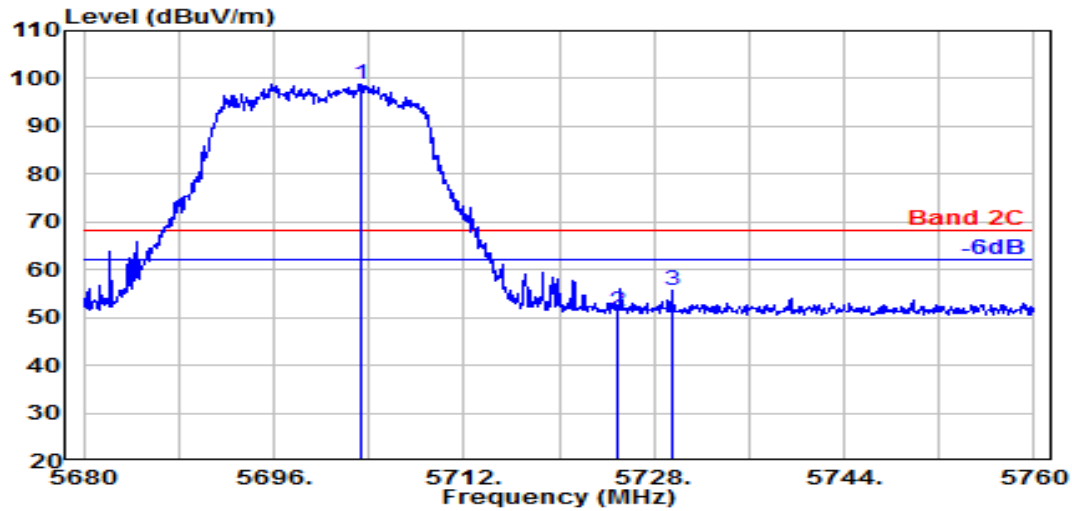

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.280	34.72	9.18	34.30	89.31	98.92	---	---	Peak
5725.000	34.85	9.19	34.31	41.47	51.21	68.20	16.99	Peak
5729.440	34.88	9.20	34.31	45.78	55.55	68.20	12.65	Peak

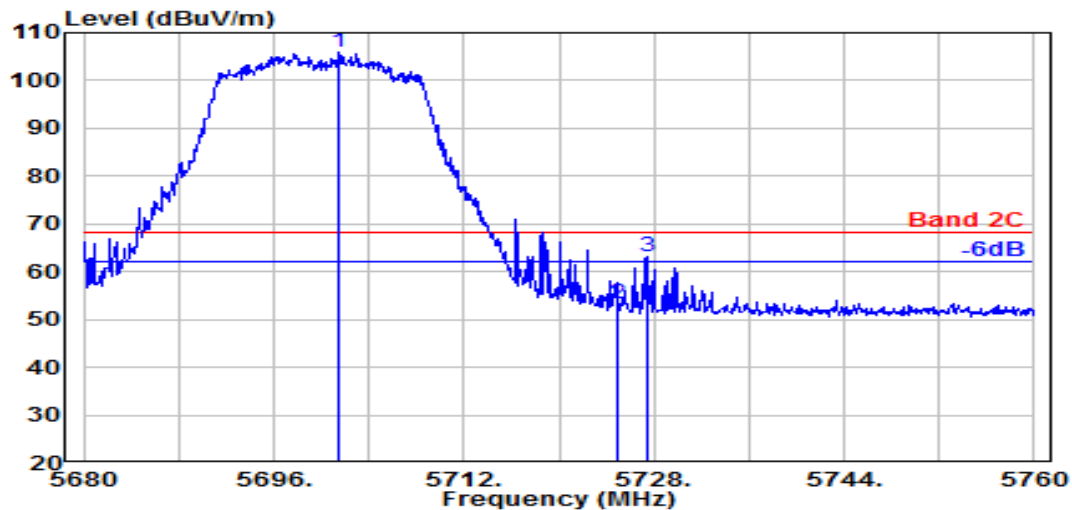


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.520	34.71	9.18	34.30	96.28	105.88	---	---	Peak
5725.000	34.85	9.19	34.31	43.70	53.44	68.20	14.76	Peak
5727.440	34.86	9.19	34.31	53.21	62.97	68.20	5.23	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

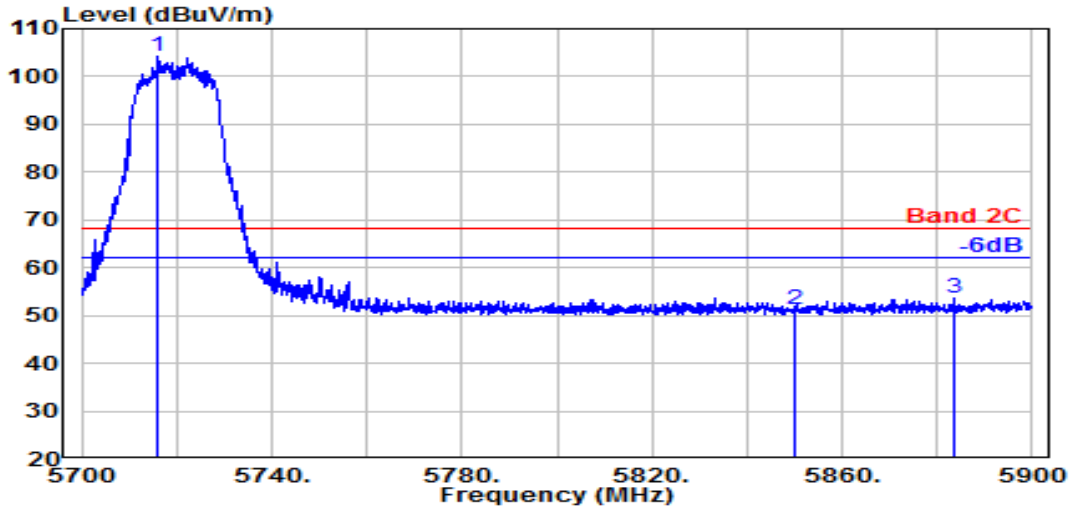

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.100	34.80	9.19	34.30	94.51	104.19	---	---	Peak
5850.000	35.40	9.26	34.36	41.08	51.37	68.20	16.83	Peak
5883.700	35.67	9.27	34.38	42.92	53.49	68.20	14.71	Peak

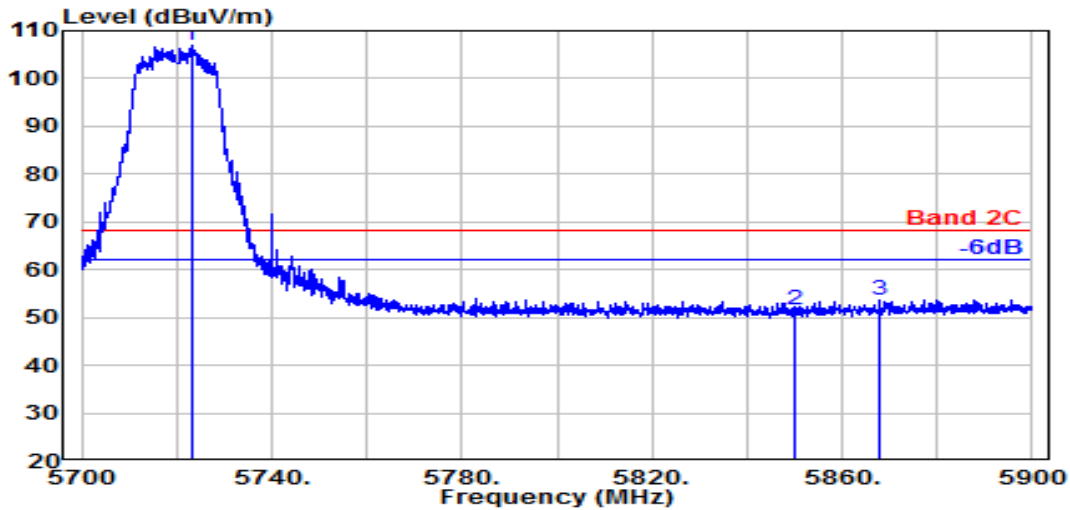


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.000	34.84	9.19	34.31	97.21	106.94	---	---	Peak
5850.000	35.40	9.26	34.36	41.32	51.62	68.20	16.58	Peak
5867.800	35.54	9.27	34.37	43.32	53.75	68.20	14.45	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

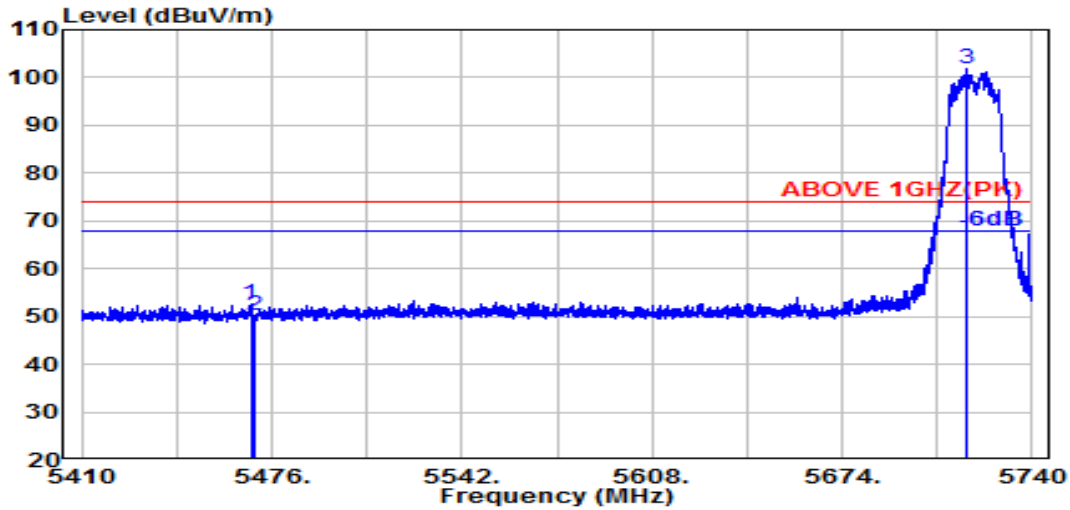

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.64	9.06	34.21	43.27	52.76	74.00	21.24	Peak
5470.000	34.64	9.06	34.21	40.66	50.15	74.00	23.85	Peak
@ 5717.400	34.80	9.19	34.30	92.00	101.69	---	---	Peak

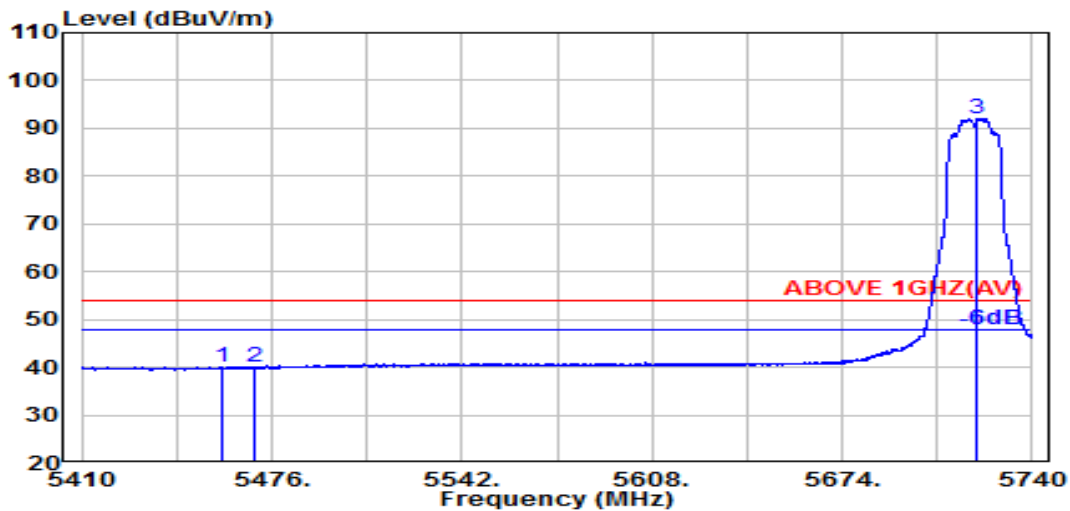


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.62	9.06	34.22	30.72	40.18	54.00	13.82	Average
5470.000	34.64	9.06	34.21	30.48	39.97	54.00	14.03	Average
@ 5721.000	34.83	9.19	34.30	82.24	91.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

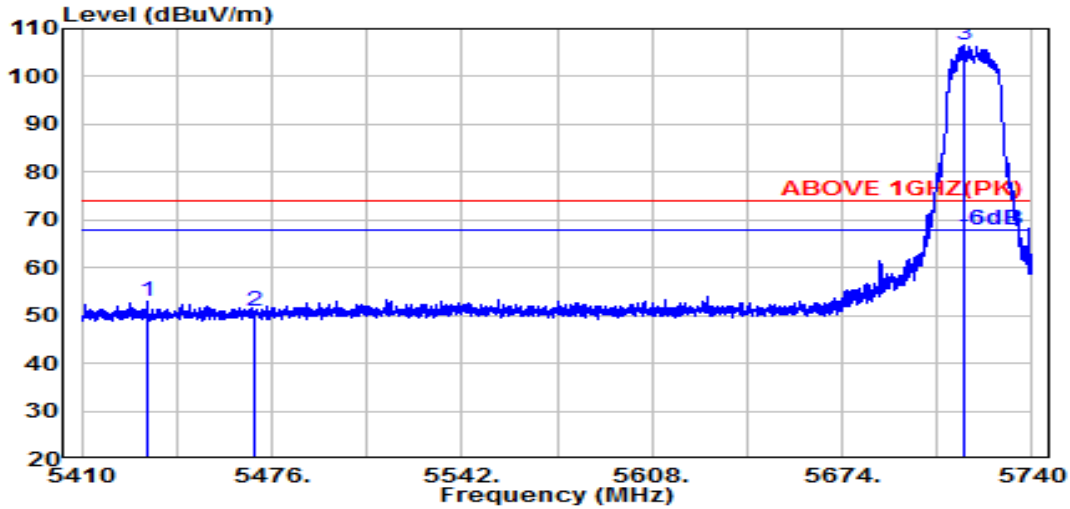

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.800	34.67	9.04	34.23	43.63	53.11	74.00	20.89	Peak
5470.000	34.64	9.06	34.21	41.31	50.80	74.00	23.20	Peak
@ 5716.600	34.80	9.19	34.30	96.77	106.46	---	---	Peak

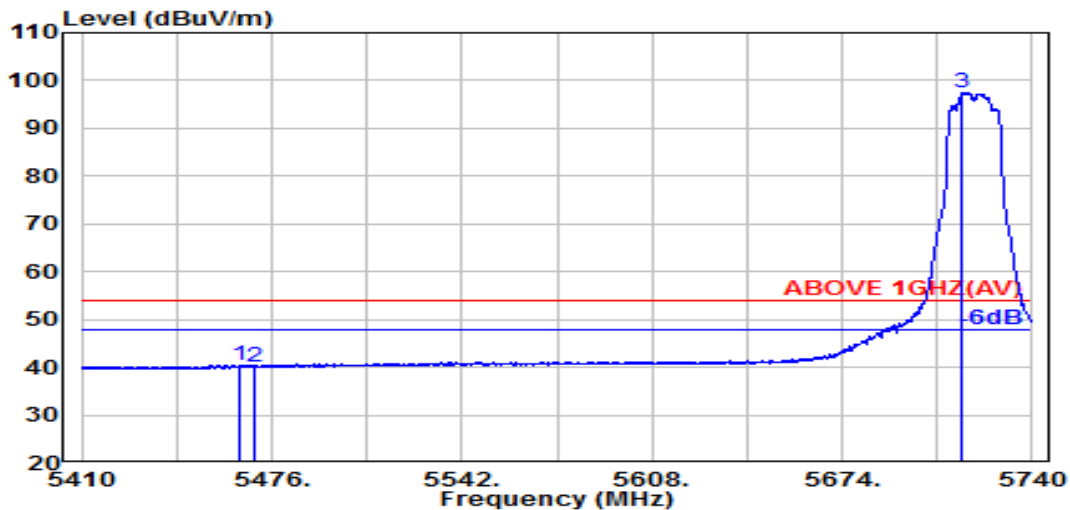


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.63	9.06	34.21	30.89	40.37	54.00	13.63	Average
5470.000	34.64	9.06	34.21	30.55	40.04	54.00	13.96	Average
@ 5715.900	34.80	9.19	34.30	87.88	97.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

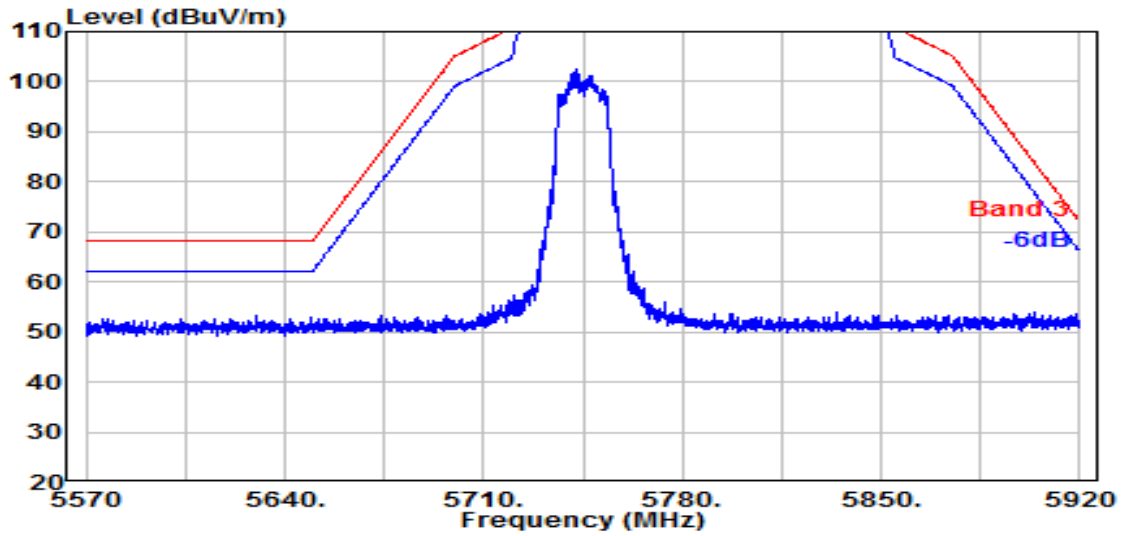


Antenna at Vertical Polarization

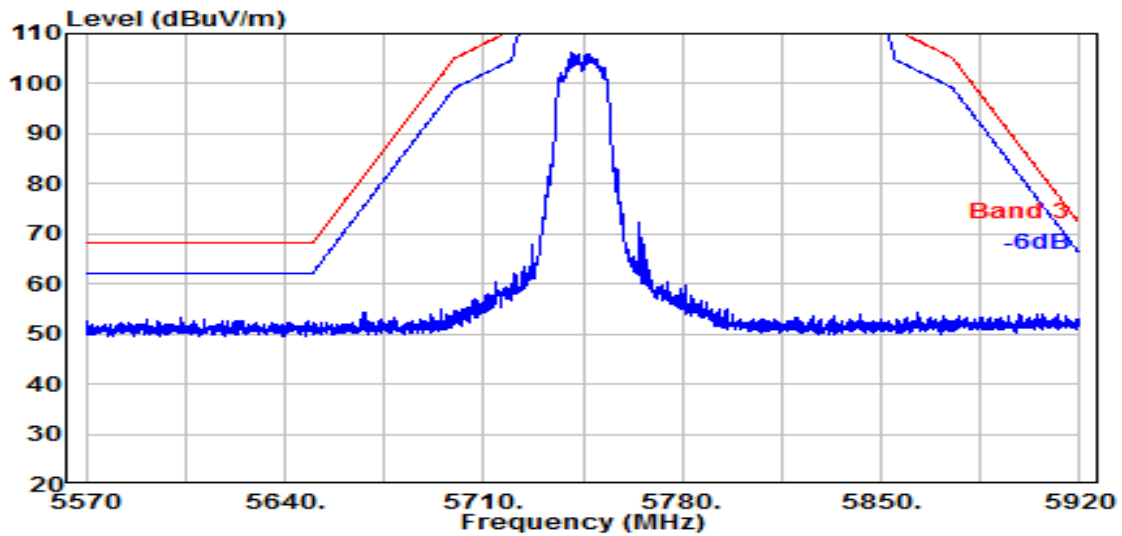


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

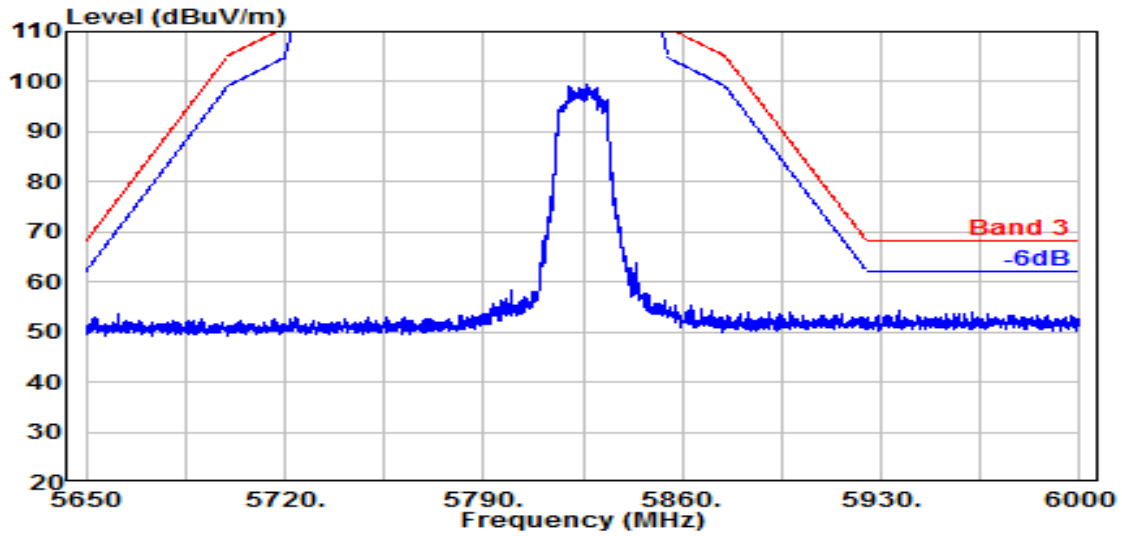

Antenna at Vertical Polarization

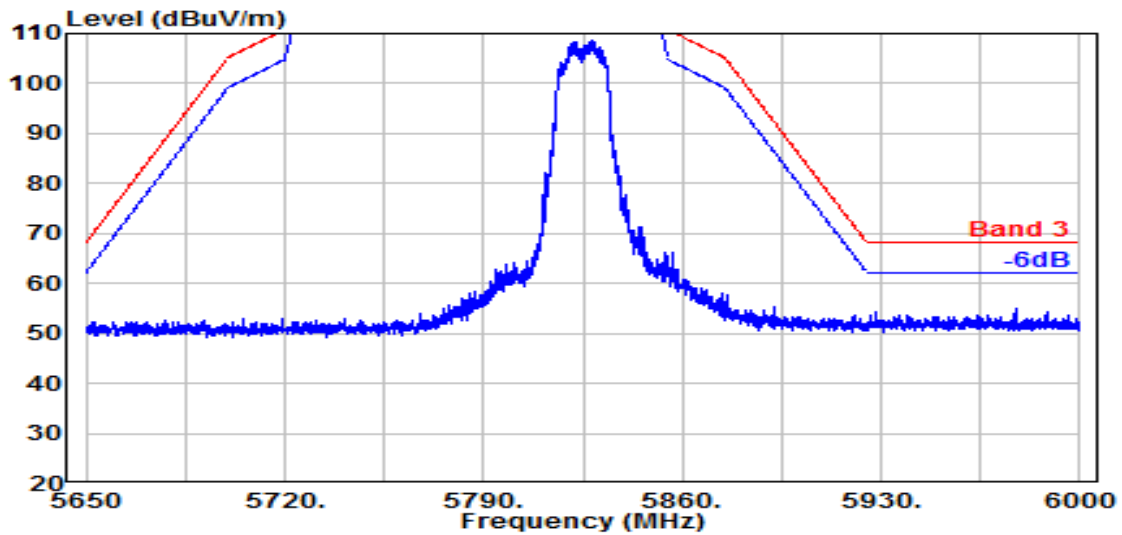


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

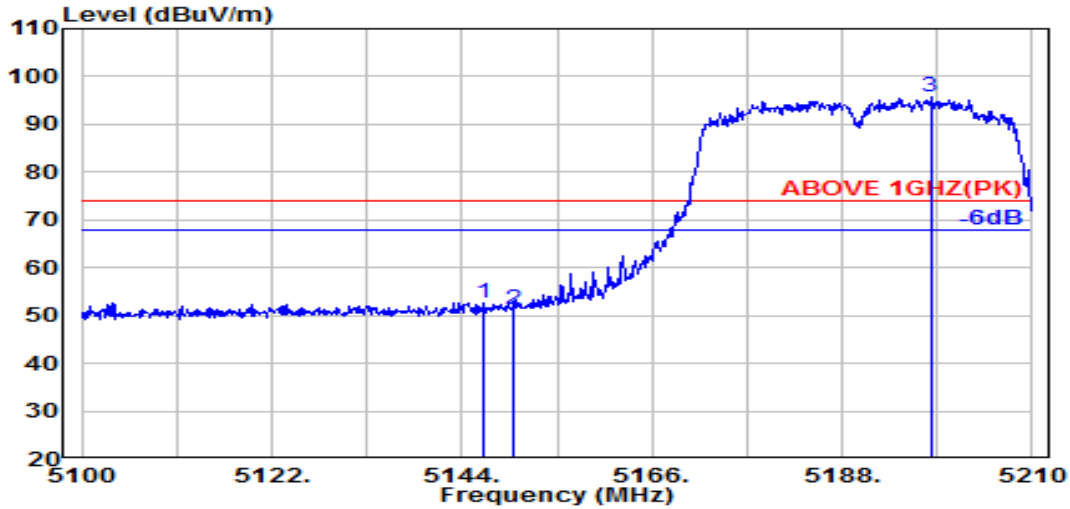

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.530	34.48	8.88	34.34	43.64	52.66	74.00	21.34	Peak
5150.000	34.50	8.89	34.34	42.07	51.11	74.00	22.89	Peak
@ 5198.230	34.69	8.91	34.32	86.42	95.71	---	---	Peak

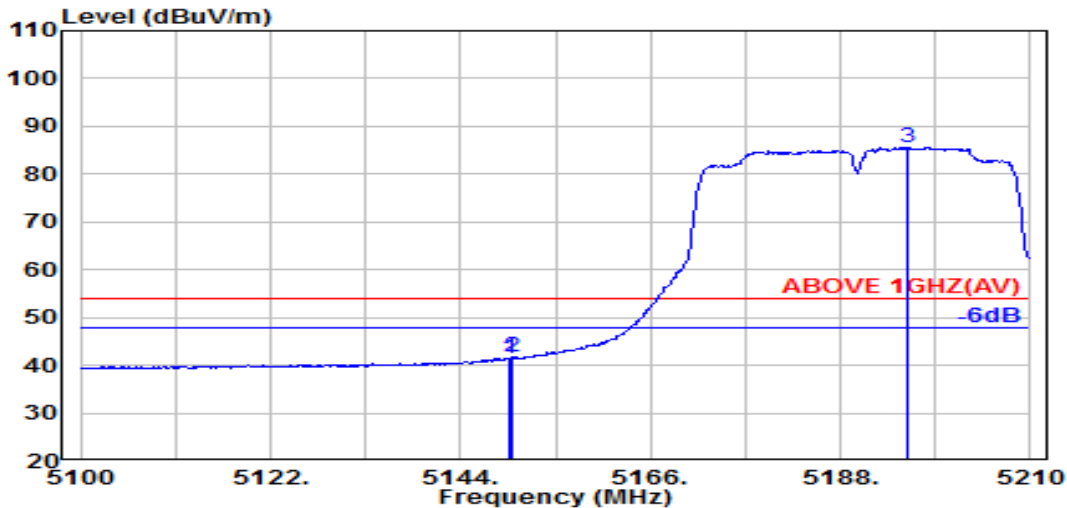


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.50	8.89	34.34	32.39	41.44	54.00	12.56	Average
5150.000	34.50	8.89	34.34	32.59	41.64	54.00	12.36	Average
@ 5195.700	34.68	8.91	34.32	76.35	85.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

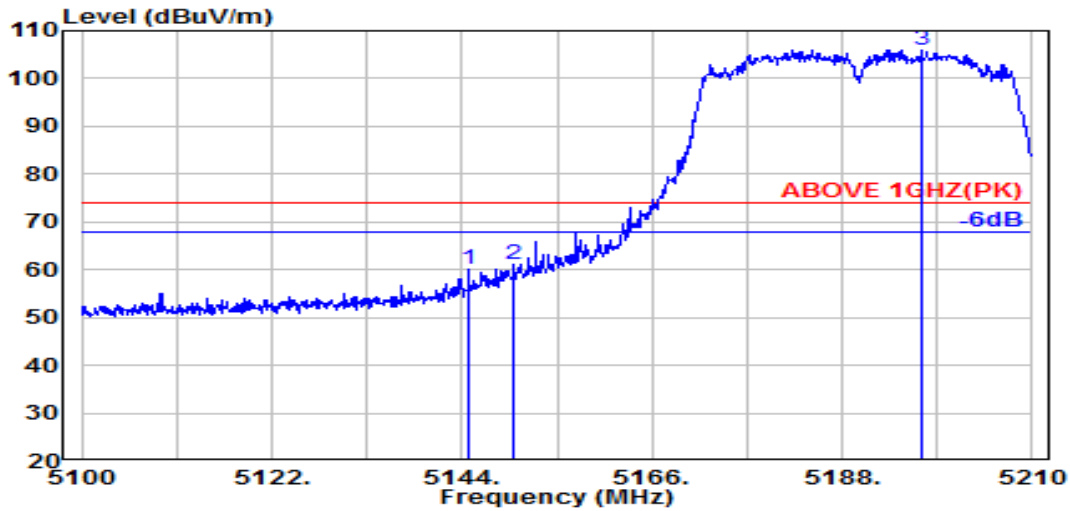

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.770	34.47	8.88	34.34	51.22	60.24	74.00	13.76	Peak
5150.000	34.50	8.89	34.34	51.97	61.02	74.00	12.98	Peak
@ 5197.240	34.69	8.91	34.32	96.71	105.99	---	---	Peak

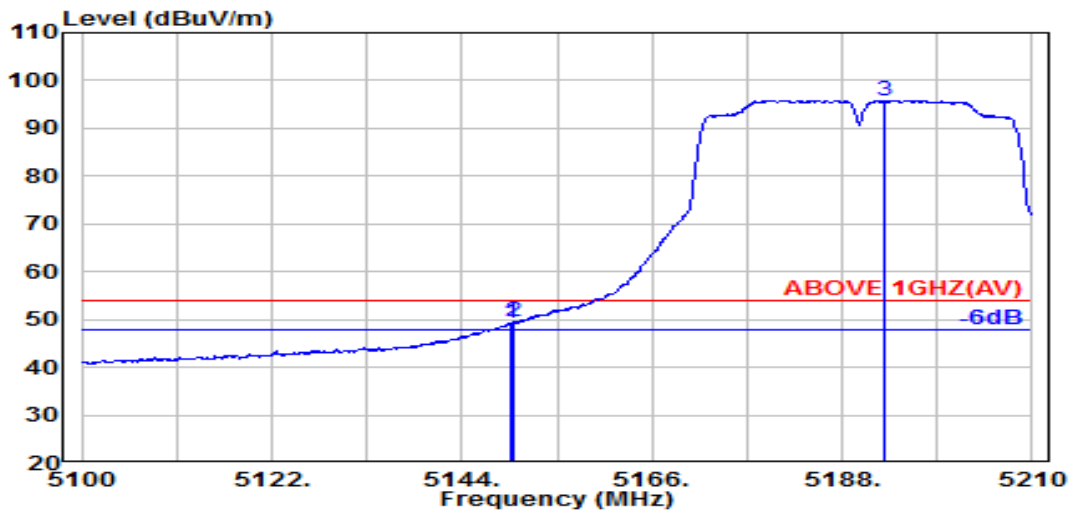


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.50	8.89	34.34	40.26	49.31	54.00	4.69	Average
5150.000	34.50	8.89	34.34	40.46	49.51	54.00	4.49	Average
@ 5192.950	34.67	8.91	34.32	86.61	95.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

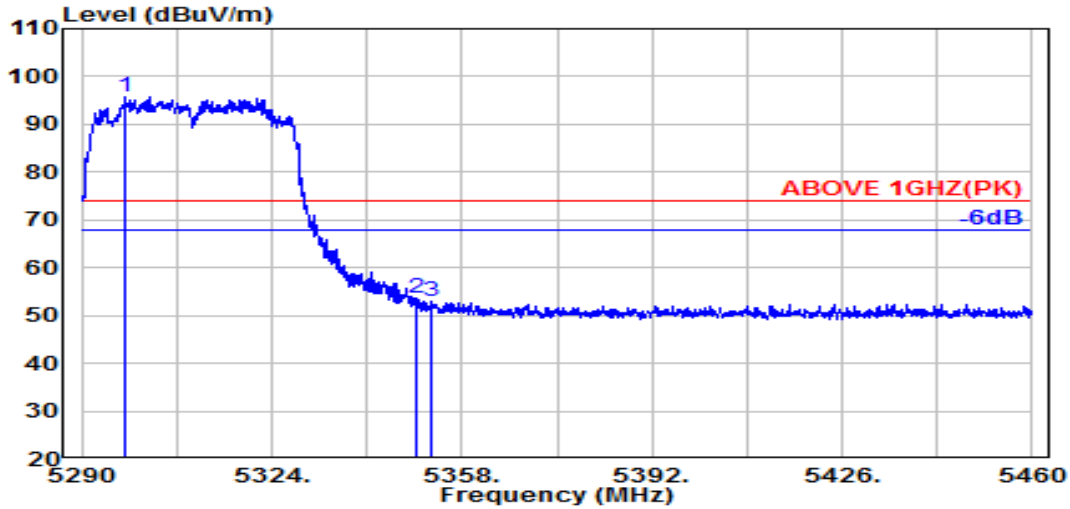

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.800	34.40	8.97	34.28	86.77	95.86	---	---	Peak
5350.000	34.90	9.00	34.26	43.85	53.49	74.00	20.51	Peak
5352.700	34.89	9.00	34.26	43.32	52.96	74.00	21.04	Peak

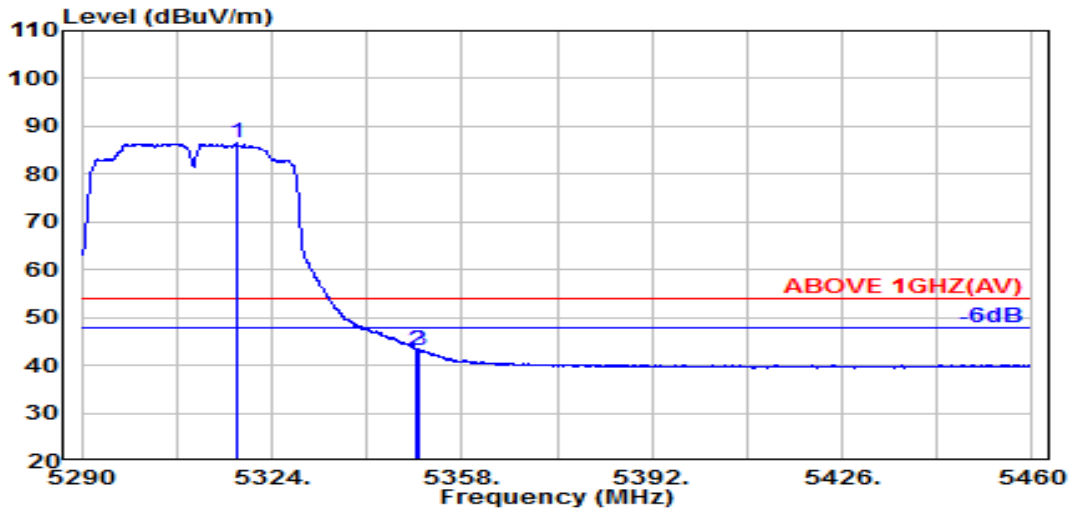


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.900	34.58	8.98	34.27	77.20	86.48	---	---	Average
5350.000	34.90	9.00	34.26	33.59	43.23	54.00	10.77	Average
5350.400	34.90	9.00	34.26	33.55	43.18	54.00	10.82	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

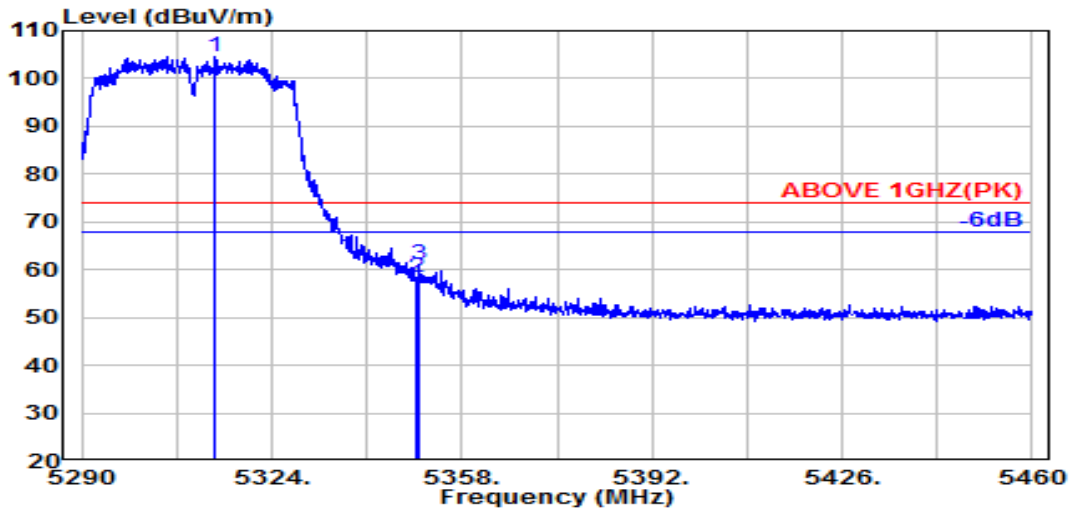

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.900	34.54	8.98	34.27	95.20	104.45	---	---	Peak
5350.000	34.90	9.00	34.26	48.69	58.33	74.00	15.67	Peak
5350.500	34.90	9.00	34.26	51.29	60.93	74.00	13.07	Peak

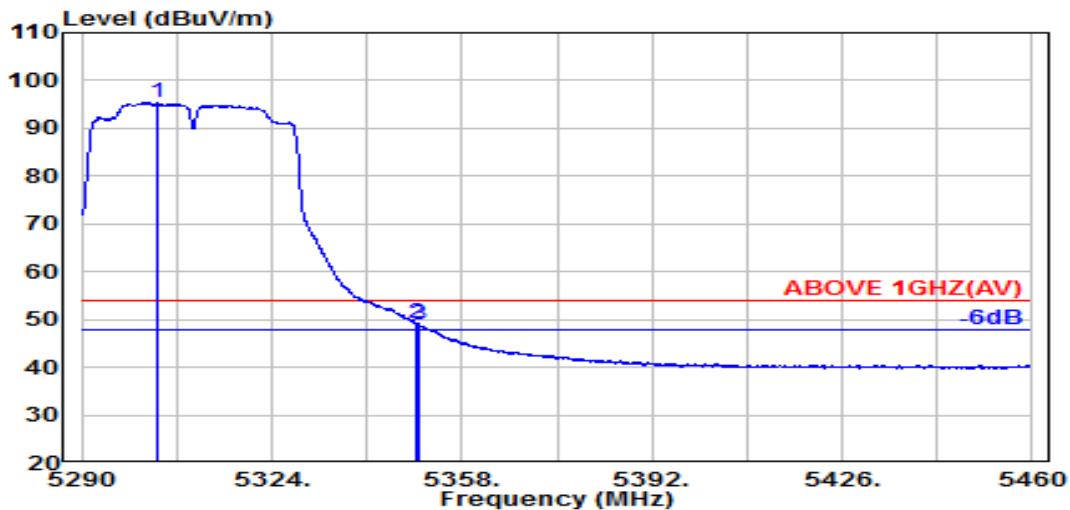


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.500	34.44	8.97	34.28	86.41	95.54	---	---	Average
5350.000	34.90	9.00	34.26	39.66	49.30	54.00	4.70	Average
5350.400	34.90	9.00	34.26	39.37	49.01	54.00	4.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

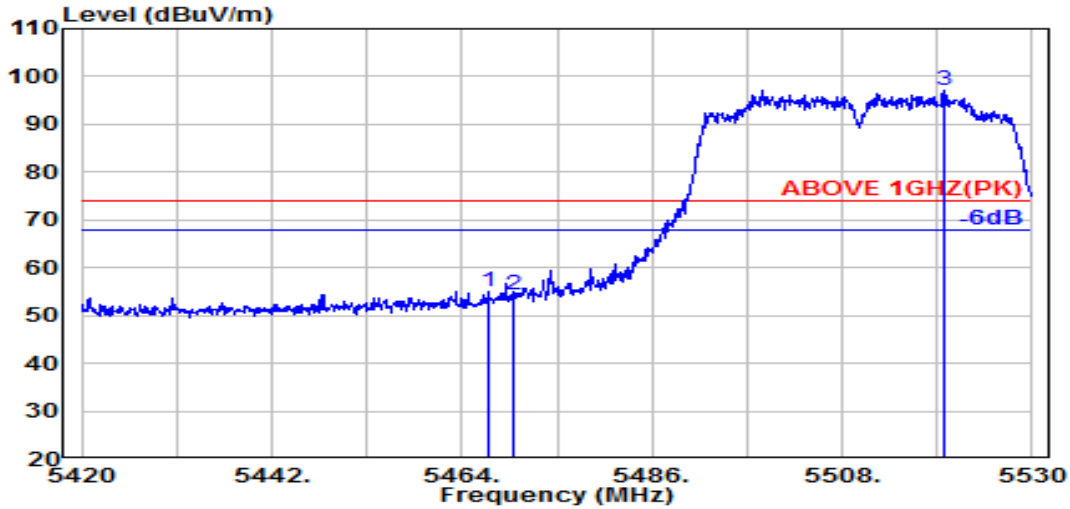

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.63	9.06	34.21	45.45	54.93	74.00	19.07	Peak
5470.000	34.64	9.06	34.21	44.67	54.16	74.00	19.84	Peak
@ 5519.900	34.70	9.09	34.21	87.60	97.18	---	---	Peak

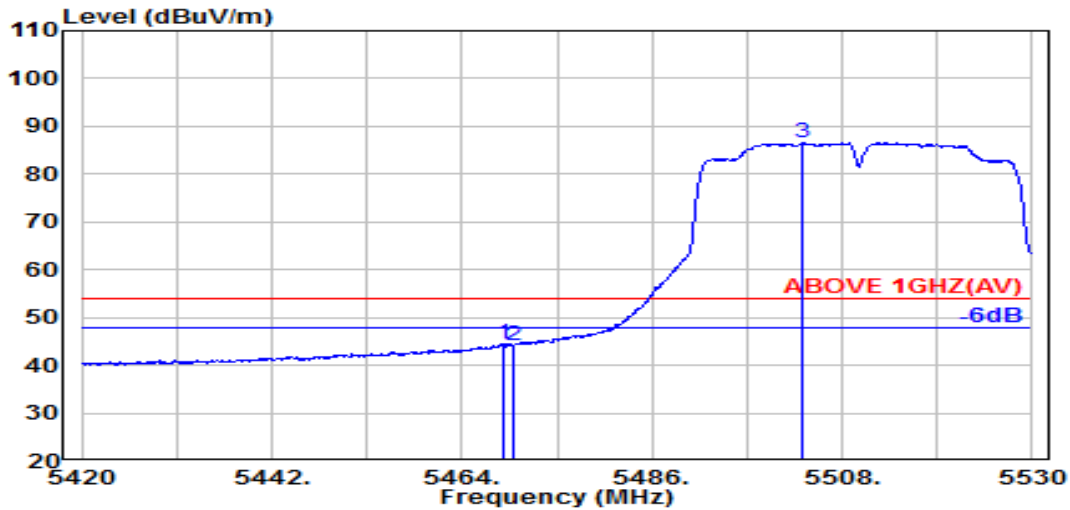


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.64	9.06	34.21	34.96	44.44	54.00	9.56	Average
5470.000	34.64	9.06	34.21	34.55	44.04	54.00	9.96	Average
@ 5503.500	34.70	9.08	34.20	76.94	86.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

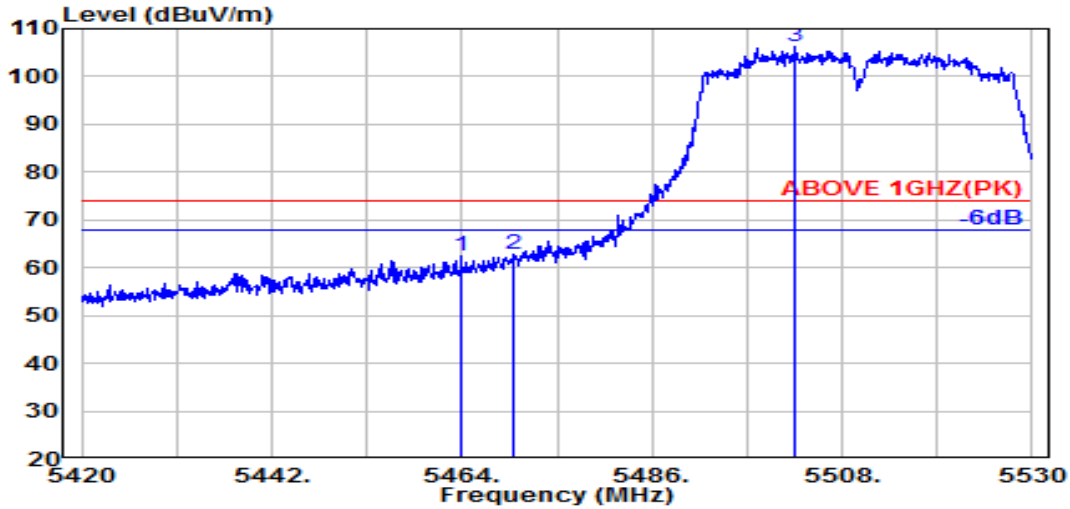

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.900	34.63	9.06	34.21	52.83	62.30	74.00	11.70	Peak
5470.000	34.64	9.06	34.21	53.23	62.72	74.00	11.28	Peak
@ 5502.600	34.70	9.08	34.20	96.55	106.13	---	---	Peak

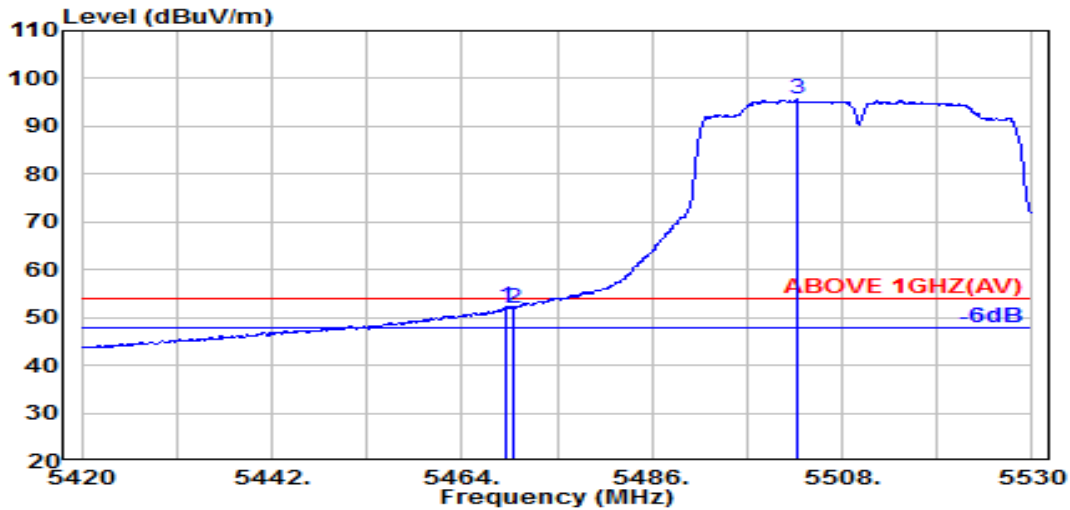


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	42.72	52.20	54.00	1.80	Average
5470.000	34.64	9.06	34.21	42.51	52.00	54.00	2.00	Average
@ 5502.800	34.70	9.08	34.20	86.03	95.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

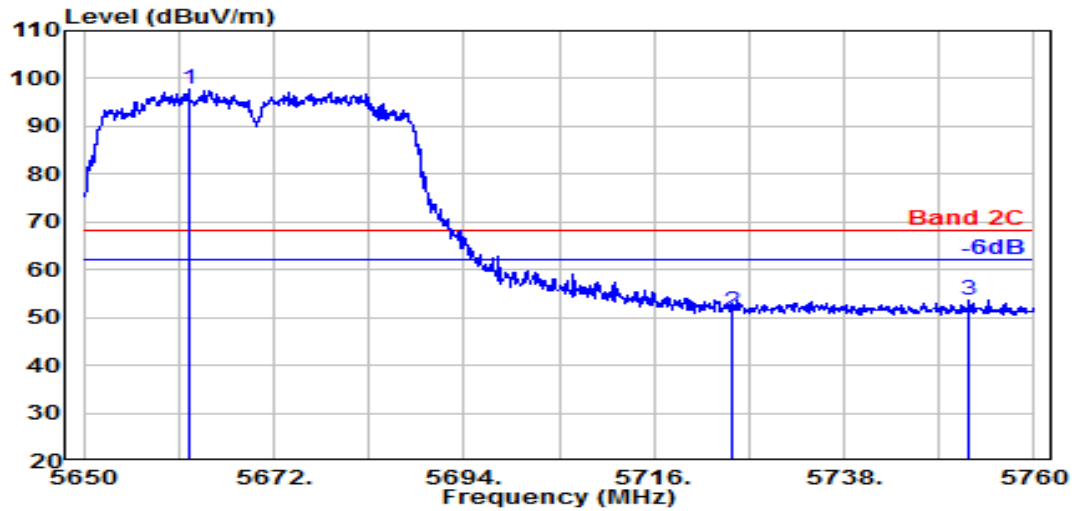

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.100	34.55	9.16	34.28	88.18	97.62	---	---	Peak
5725.000	34.85	9.19	34.31	41.62	51.36	68.20	16.84	Peak
5752.500	35.01	9.21	34.32	43.68	53.57	68.20	14.63	Peak

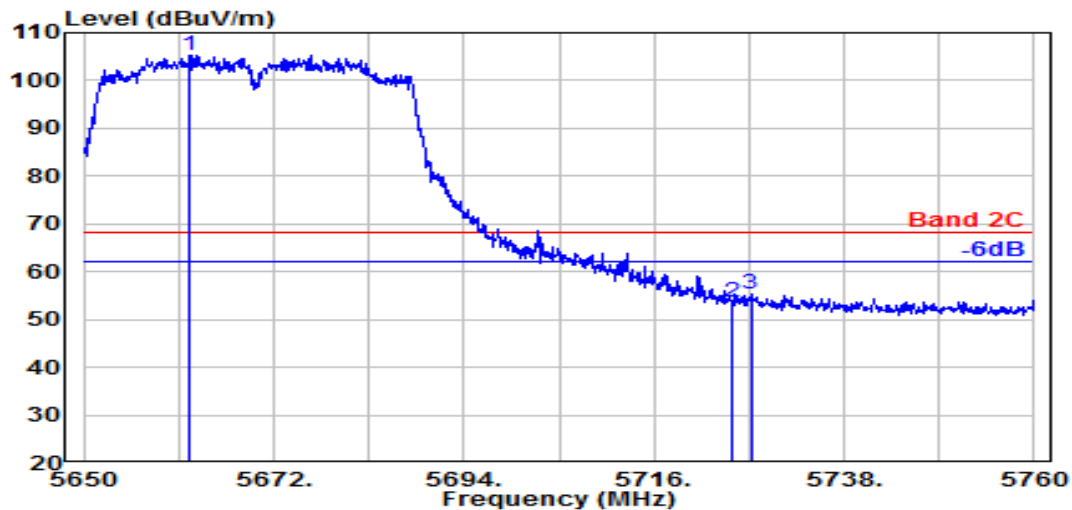


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.300	34.55	9.16	34.28	95.94	105.37	---	---	Peak
5725.000	34.85	9.19	34.31	43.86	53.60	68.20	14.60	Peak
5727.200	34.86	9.19	34.31	45.60	55.36	68.20	12.84	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

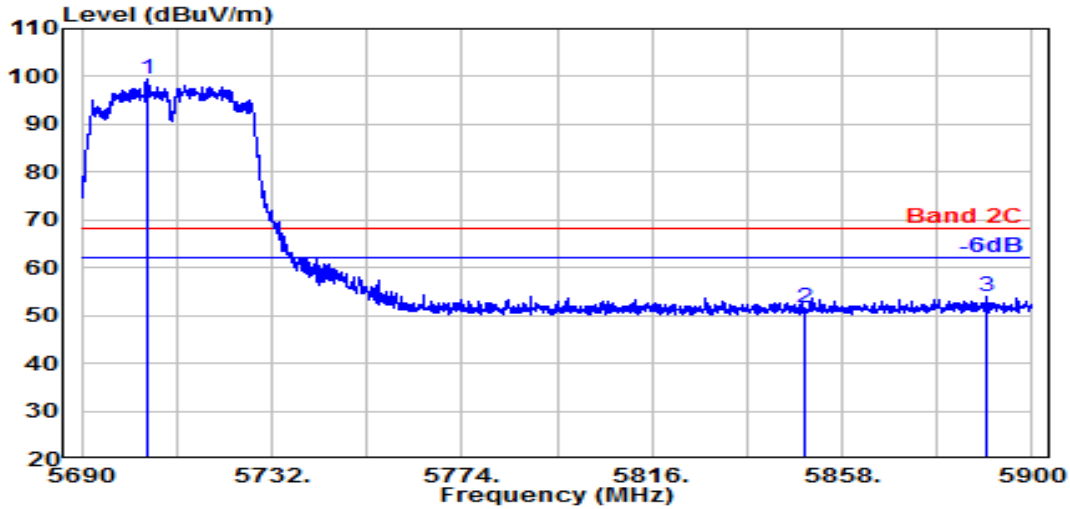

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.400	34.73	9.18	34.30	90.02	99.64	---	---	Peak
5850.000	35.40	9.26	34.36	41.40	51.69	68.20	16.51	Peak
5890.100	35.72	9.28	34.38	43.52	54.13	68.20	14.07	Peak

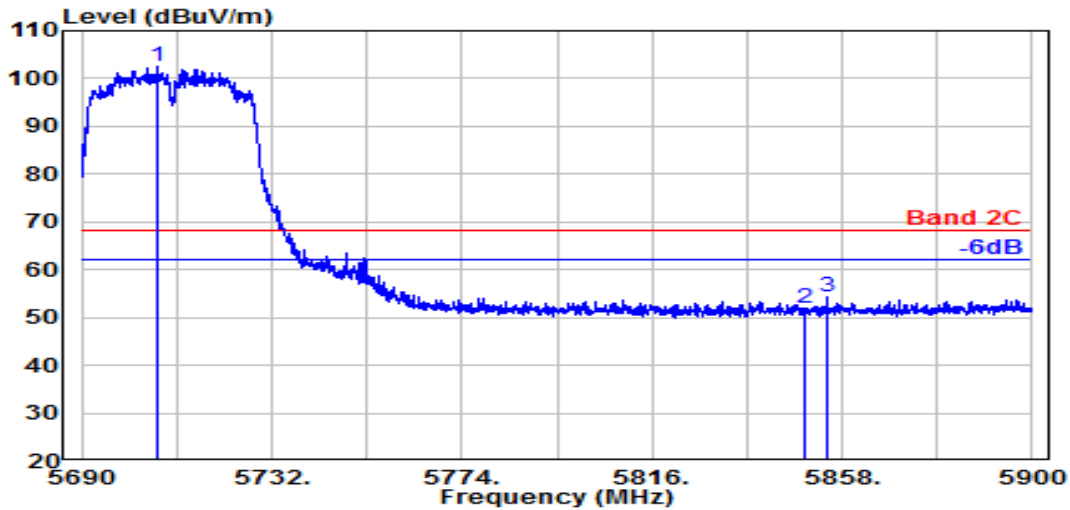


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.800	34.74	9.18	34.30	92.94	102.57	---	---	Peak
5850.000	35.40	9.26	34.36	41.67	51.96	68.20	16.24	Peak
5854.600	35.44	9.26	34.37	44.05	54.38	68.20	13.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

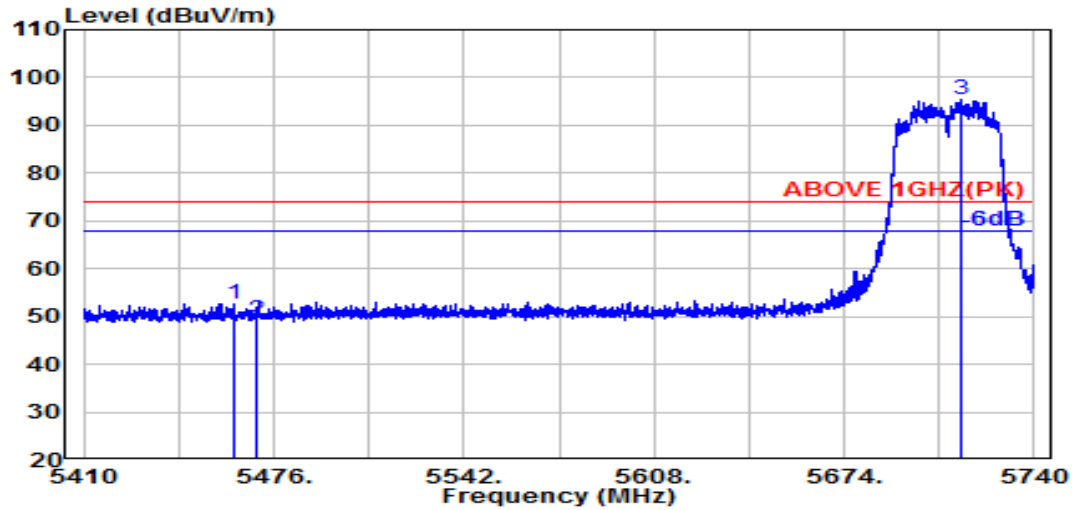

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.63	9.06	34.21	43.25	52.72	74.00	21.28	Peak
5470.000	34.64	9.06	34.21	39.86	49.35	74.00	24.65	Peak
@ 5714.900	34.79	9.19	34.30	85.68	95.36	---	---	Peak

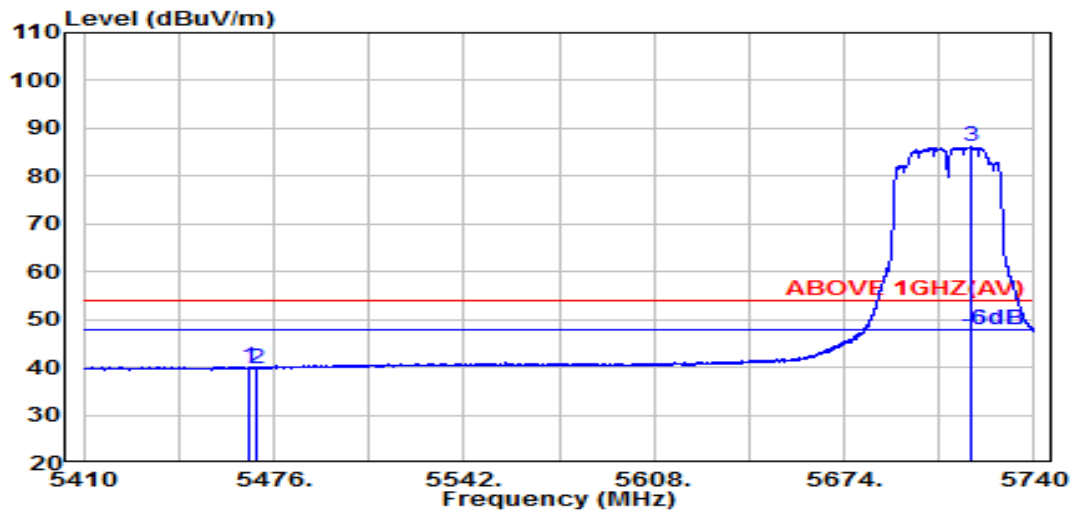


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.64	9.06	34.21	30.58	40.07	54.00	13.93	Average
5470.000	34.64	9.06	34.21	30.29	39.78	54.00	14.22	Average
@ 5717.900	34.81	9.19	34.30	76.58	86.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

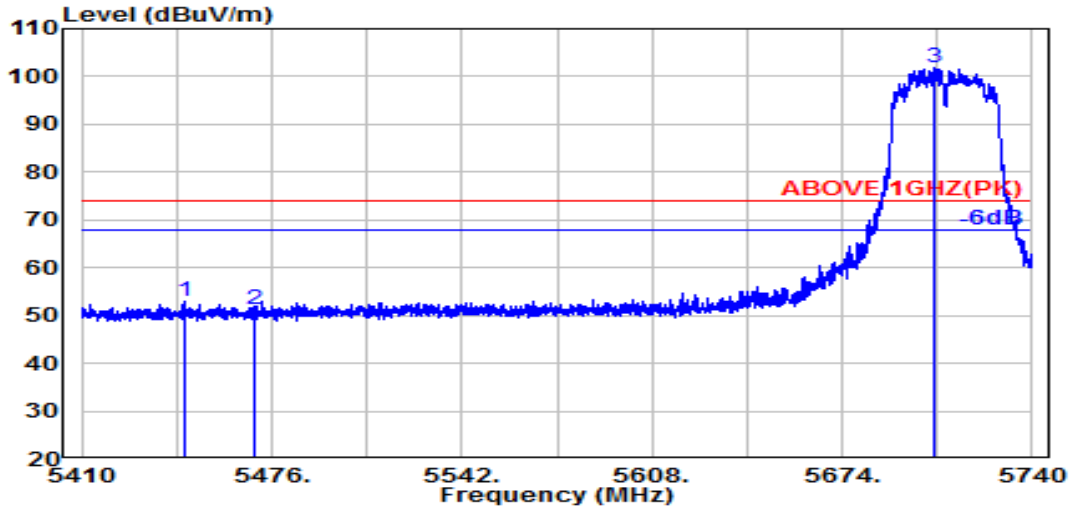

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.500	34.62	9.05	34.22	43.47	52.91	74.00	21.09	Peak
5470.000	34.64	9.06	34.21	41.77	51.26	74.00	22.74	Peak
@ 5705.600	34.73	9.18	34.30	92.15	101.77	---	---	Peak

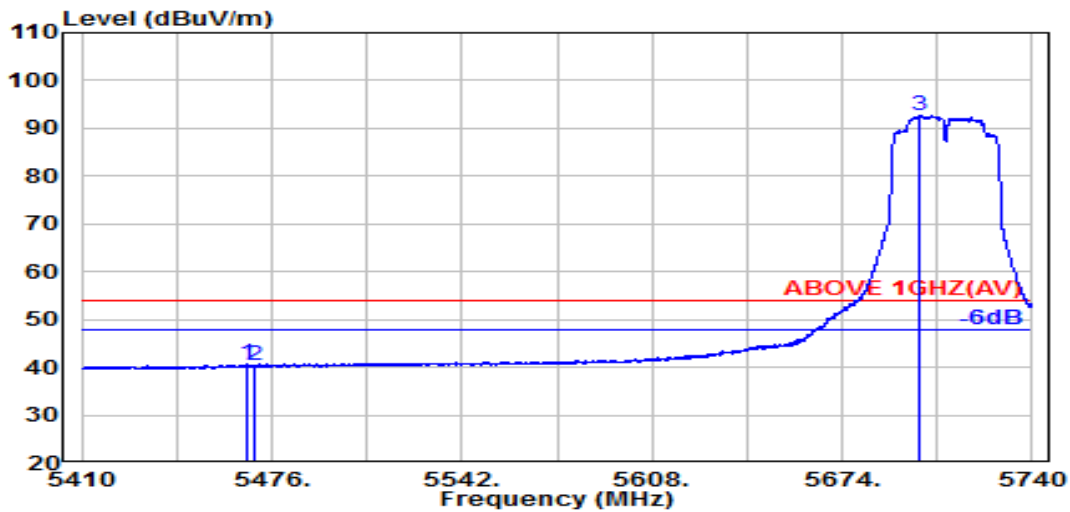


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.63	9.06	34.21	31.09	40.58	54.00	13.42	Average
5470.000	34.64	9.06	34.21	30.93	40.42	54.00	13.58	Average
@ 5700.900	34.71	9.18	34.29	83.00	92.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

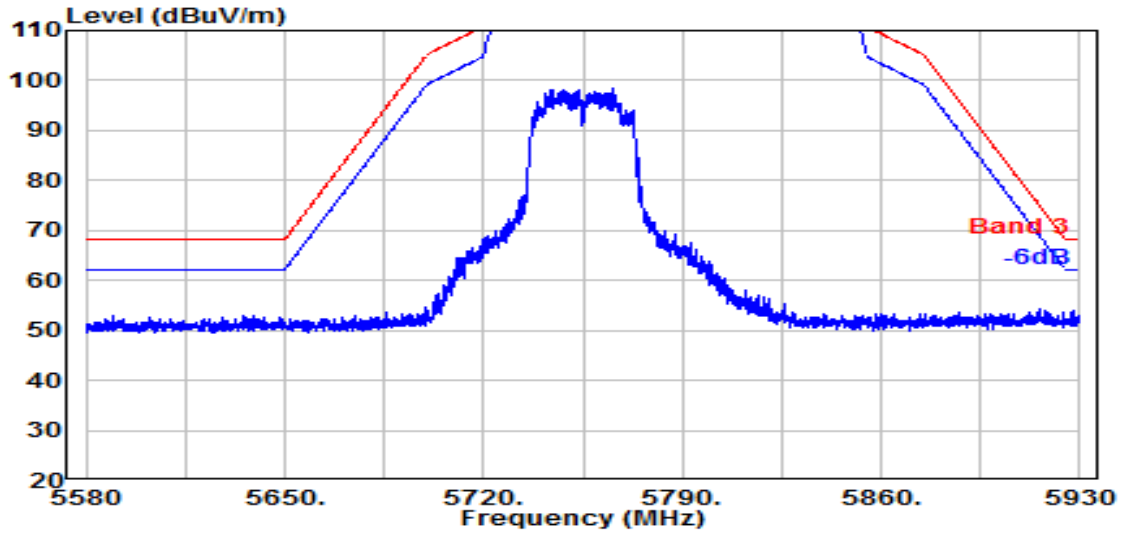


Antenna at Vertical Polarization

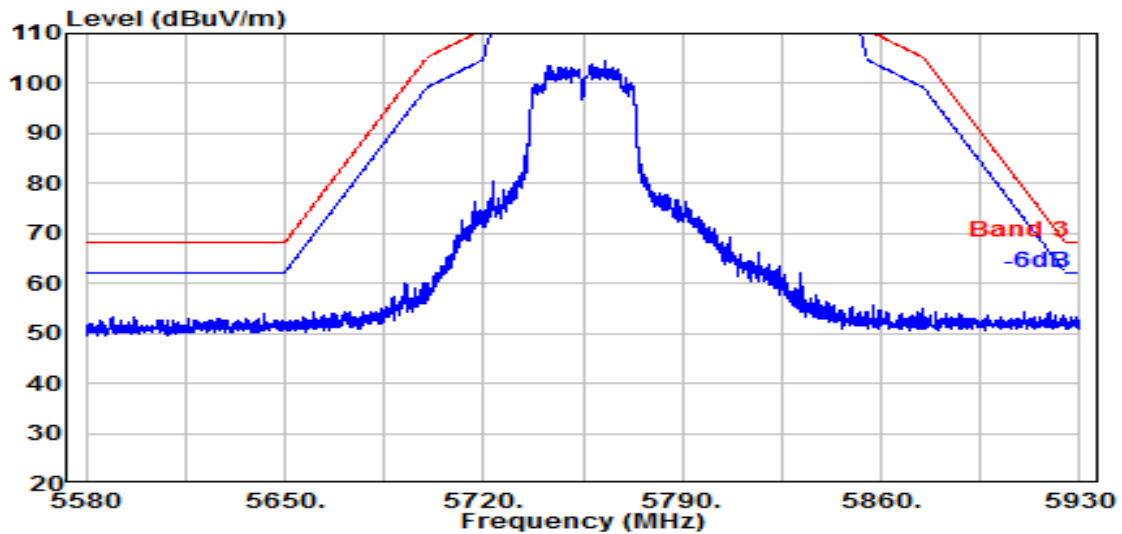


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

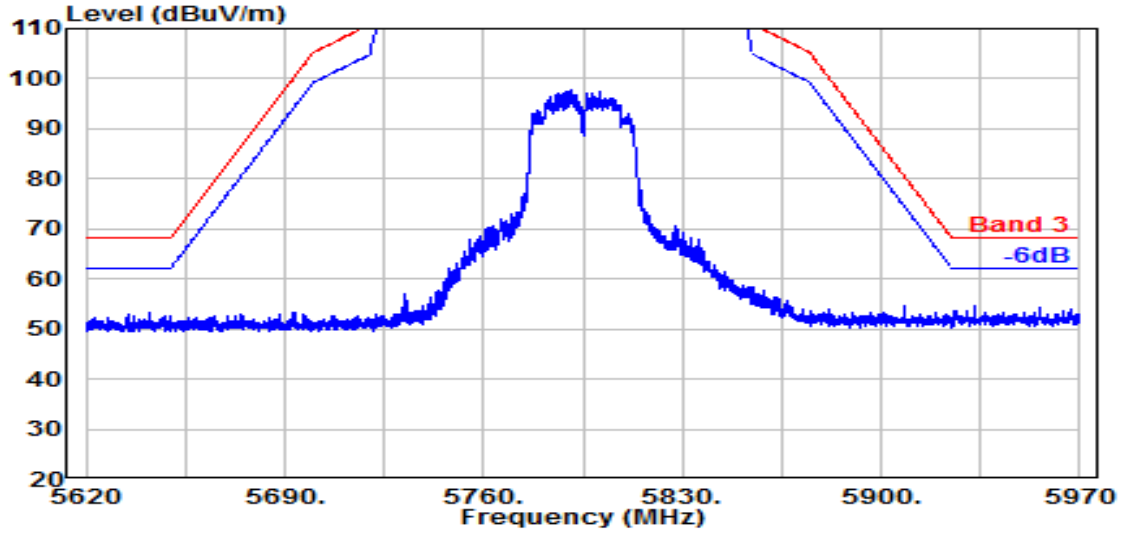

Antenna at Vertical Polarization

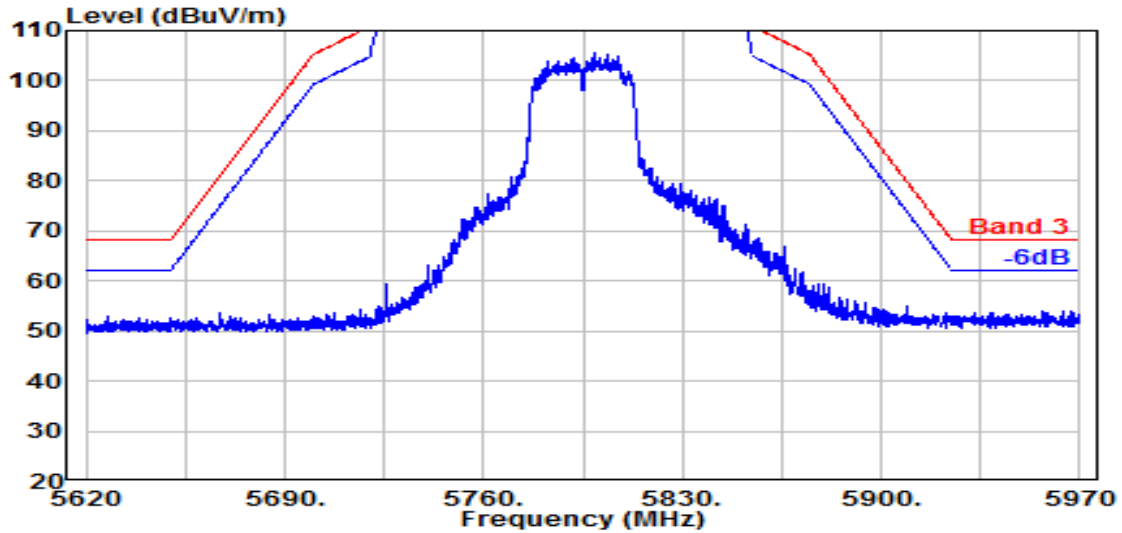


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

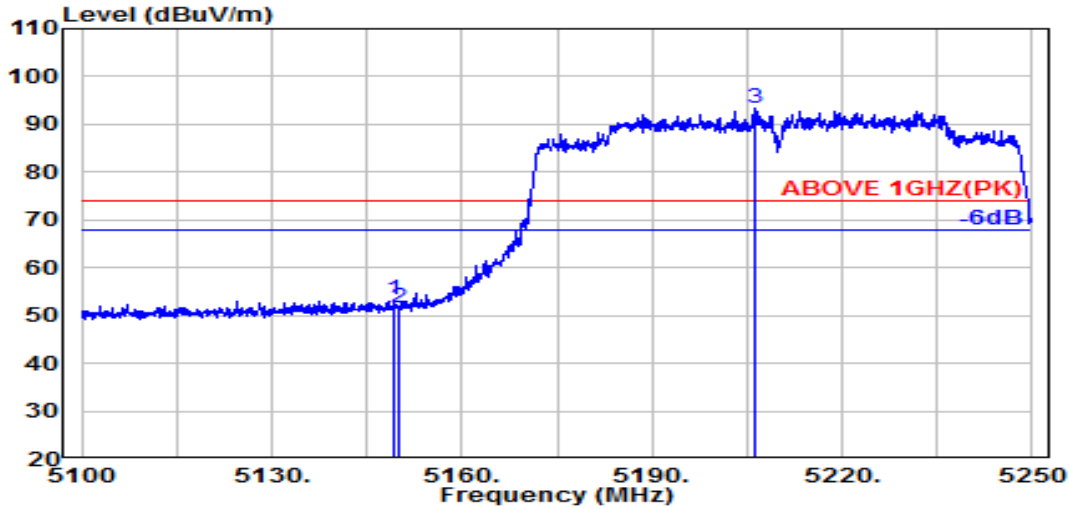

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.50	8.89	34.34	44.16	53.20	74.00	20.80	Peak
5150.000	34.50	8.89	34.34	42.38	51.43	74.00	22.57	Peak
@ 5206.400	34.67	8.92	34.32	84.22	93.49	---	---	Peak

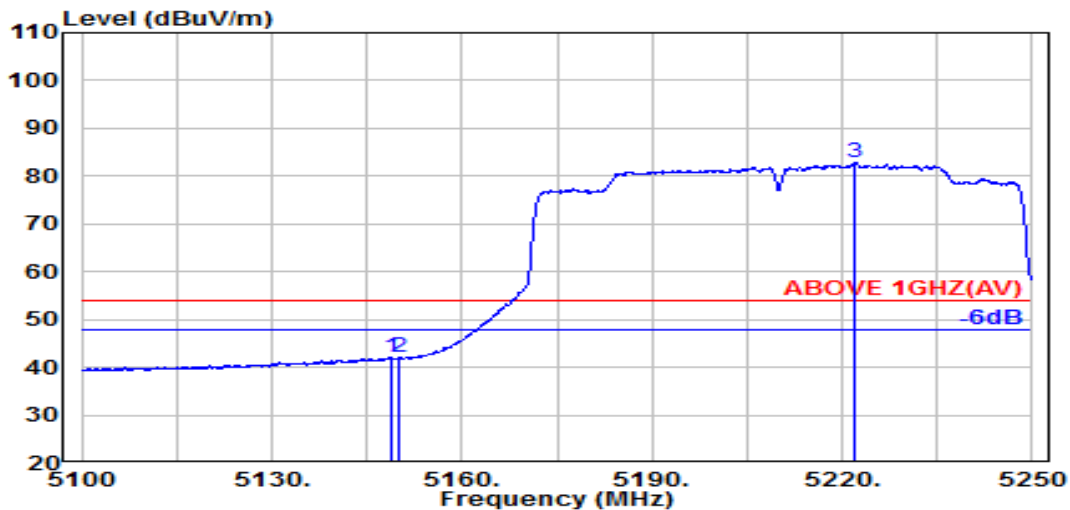


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.49	8.89	34.34	32.88	41.92	54.00	12.08	Average
5150.000	34.50	8.89	34.34	32.90	41.95	54.00	12.05	Average
@ 5222.000	34.61	8.93	34.31	73.75	82.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

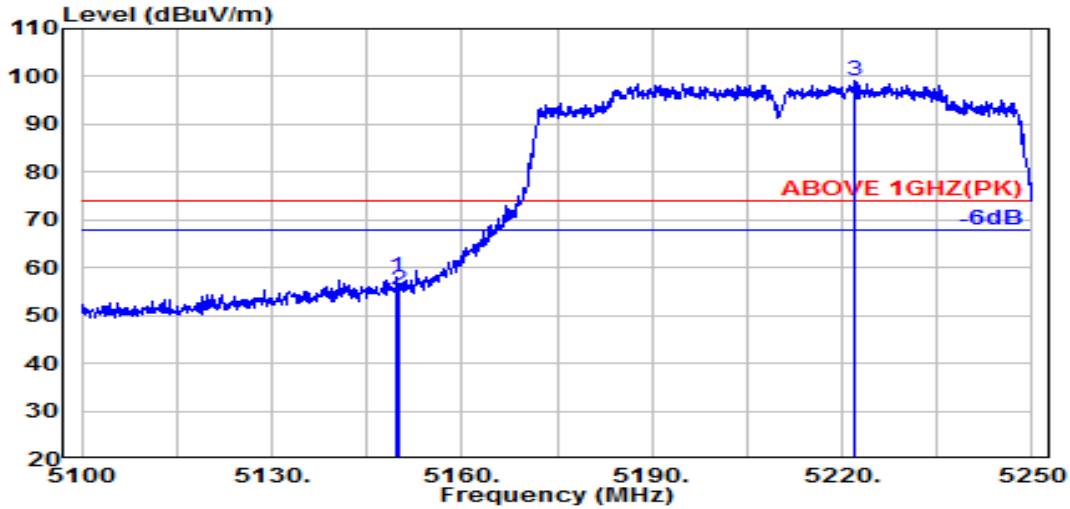

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	48.93	57.97	74.00	16.03	Peak
5150.000	34.50	8.89	34.34	46.41	55.46	74.00	18.54	Peak
@ 5222.100	34.61	8.93	34.31	89.86	99.09	---	---	Peak

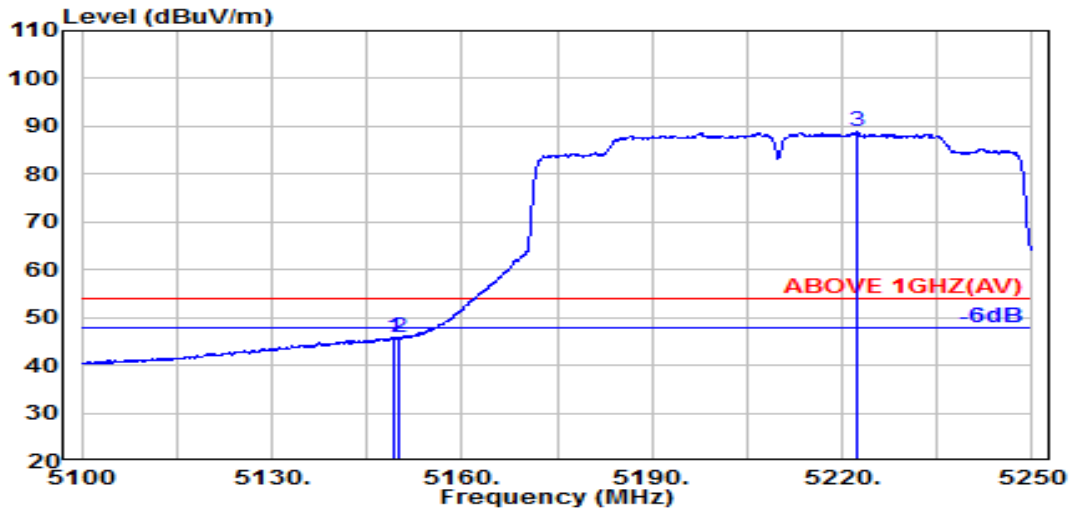


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.50	8.89	34.34	36.89	45.93	54.00	8.07	Average
5150.000	34.50	8.89	34.34	36.66	45.71	54.00	8.29	Average
@ 5222.300	34.61	8.93	34.31	79.56	88.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

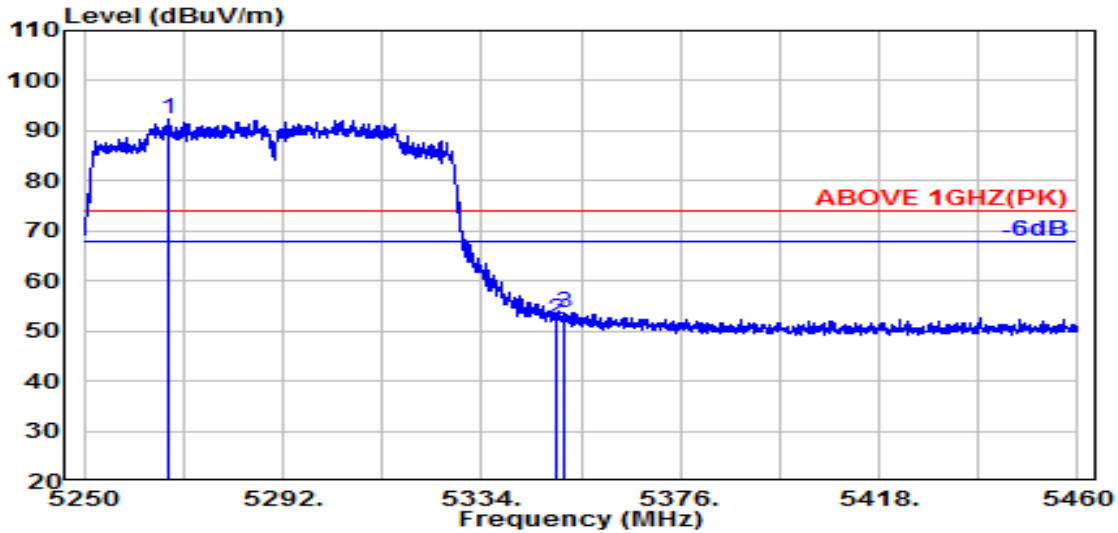

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.900	34.46	8.95	34.29	83.21	92.34	---	---	Peak
5350.000	34.90	9.00	34.26	42.52	52.16	74.00	21.84	Peak
5351.600	34.90	9.00	34.26	43.98	53.62	74.00	20.38	Peak

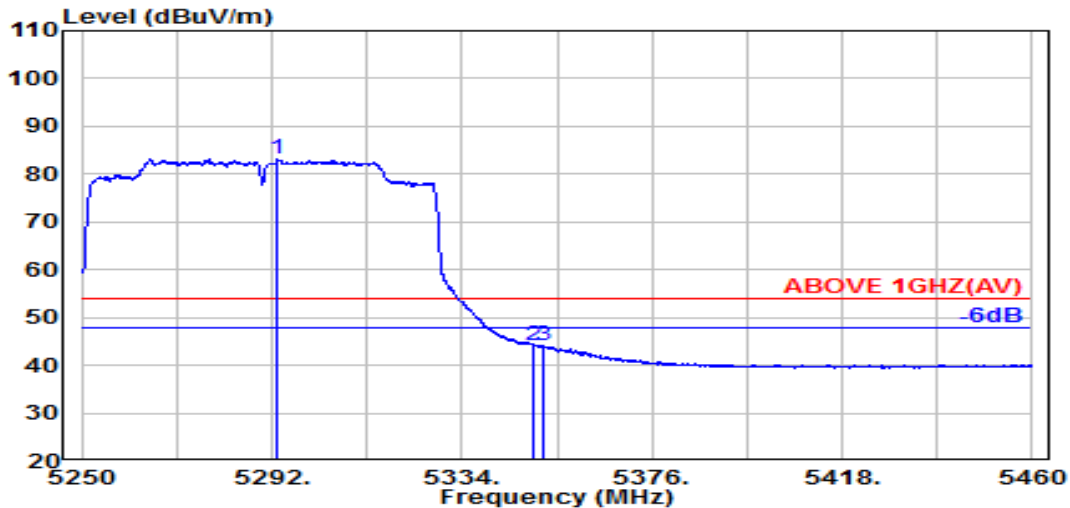


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.200	34.41	8.97	34.28	74.01	83.11	---	---	Average
5350.000	34.90	9.00	34.26	34.54	44.18	54.00	9.82	Average
5351.800	34.90	9.00	34.26	34.48	44.12	54.00	9.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

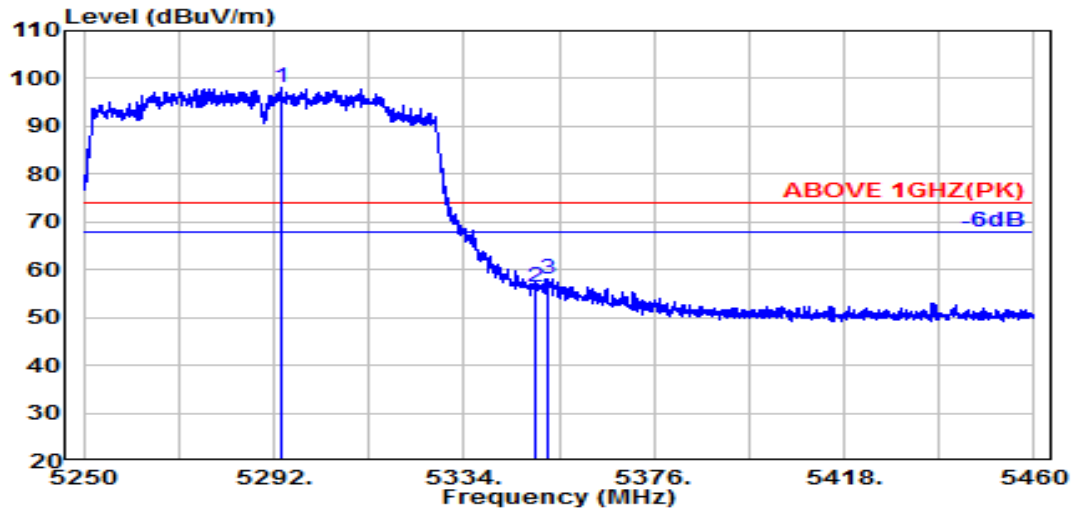

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.600	34.41	8.97	34.28	88.91	98.01	---	---	Peak
5350.000	34.90	9.00	34.26	46.60	56.24	74.00	17.76	Peak
5352.400	34.90	9.00	34.26	48.57	58.20	74.00	15.80	Peak

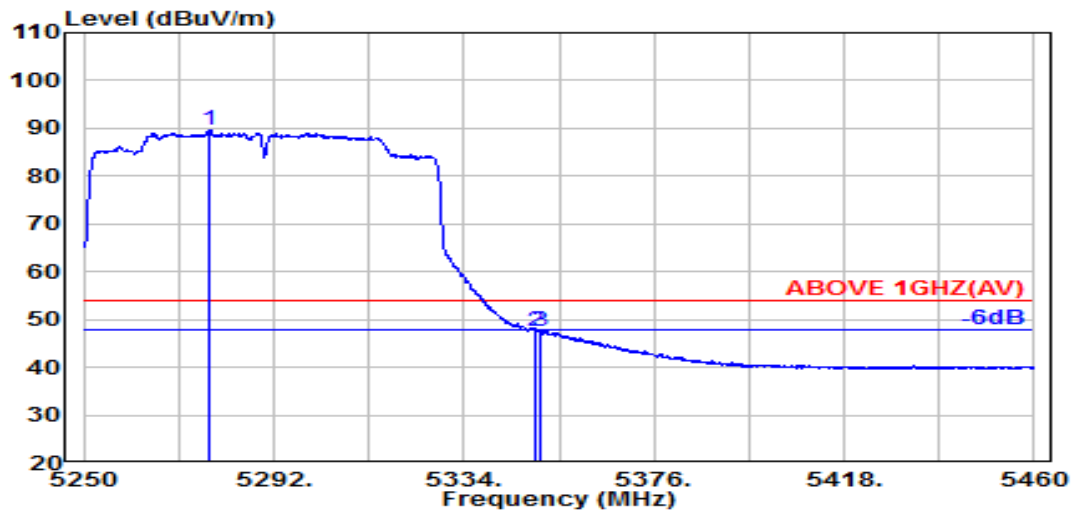


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.900	34.44	8.96	34.29	80.54	89.65	---	---	Average
5350.000	34.90	9.00	34.26	37.85	47.49	54.00	6.51	Average
5350.700	34.90	9.00	34.26	38.01	47.65	54.00	6.35	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

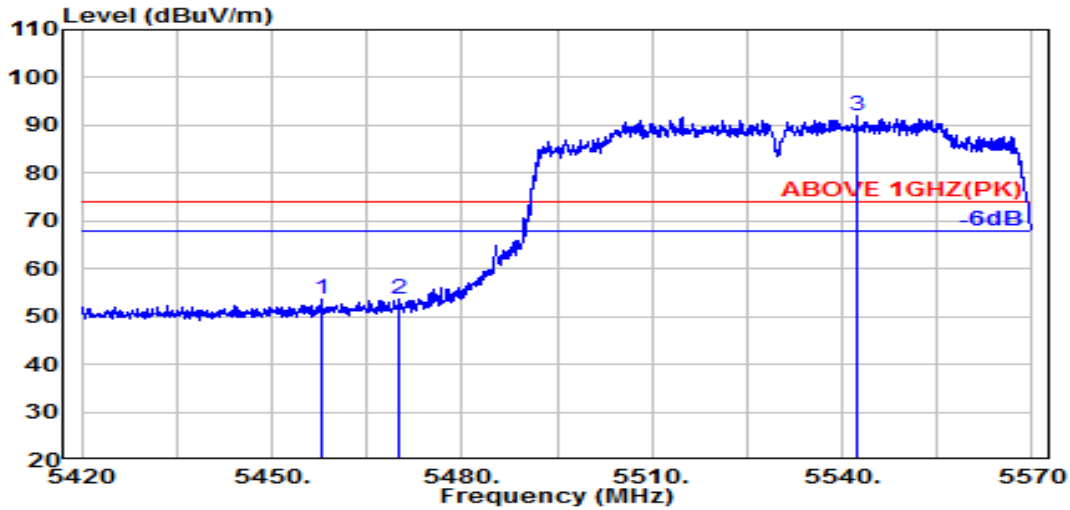

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.62	9.05	34.22	44.27	53.73	74.00	20.27	Peak
5470.000	34.64	9.06	34.21	44.09	53.58	74.00	20.42	Peak
@ 5542.300	34.70	9.10	34.22	82.53	92.11	---	---	Peak

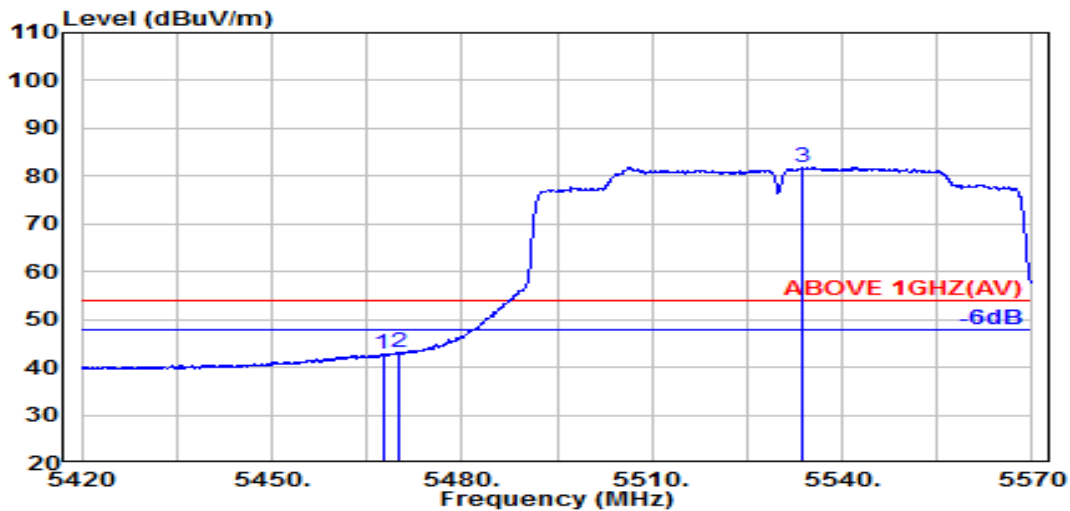


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.64	9.06	34.21	33.43	42.91	54.00	11.09	Average
5470.000	34.64	9.06	34.21	33.61	43.10	54.00	10.90	Average
@ 5533.700	34.70	9.09	34.22	72.40	81.98	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

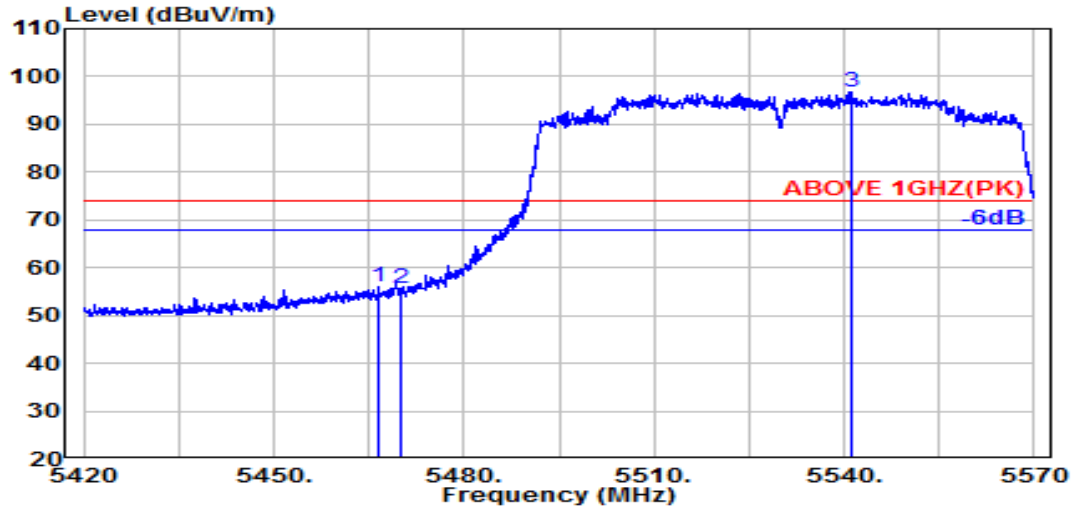

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.600	34.63	9.06	34.21	46.53	56.00	74.00	18.00	Peak
5470.000	34.64	9.06	34.21	46.25	55.74	74.00	18.26	Peak
@ 5541.300	34.70	9.10	34.22	87.13	96.71	---	---	Peak

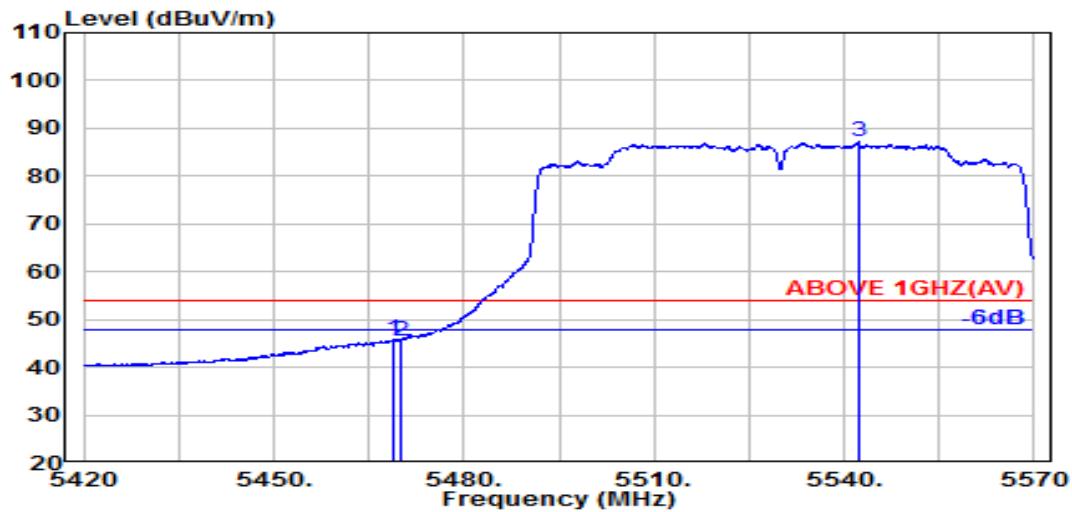


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	36.25	45.73	54.00	8.27	Average
5470.000	34.64	9.06	34.21	36.12	45.61	54.00	8.39	Average
@ 5542.300	34.70	9.10	34.22	77.76	87.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

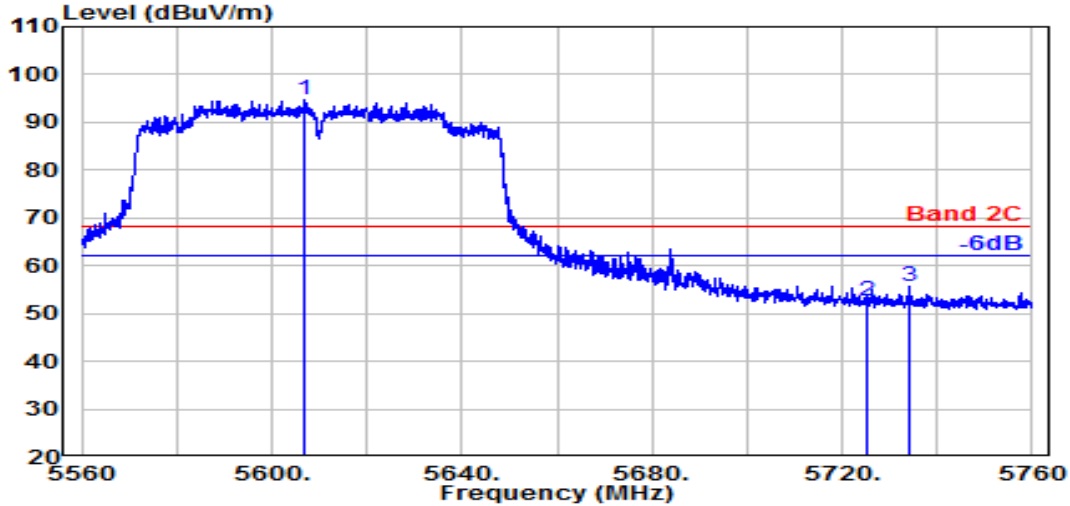

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.700	34.41	9.13	34.25	85.27	94.56	---	---	Peak
5725.000	34.85	9.19	34.31	42.87	52.60	68.20	15.60	Peak
5733.900	34.90	9.20	34.31	45.99	55.78	68.20	12.42	Peak

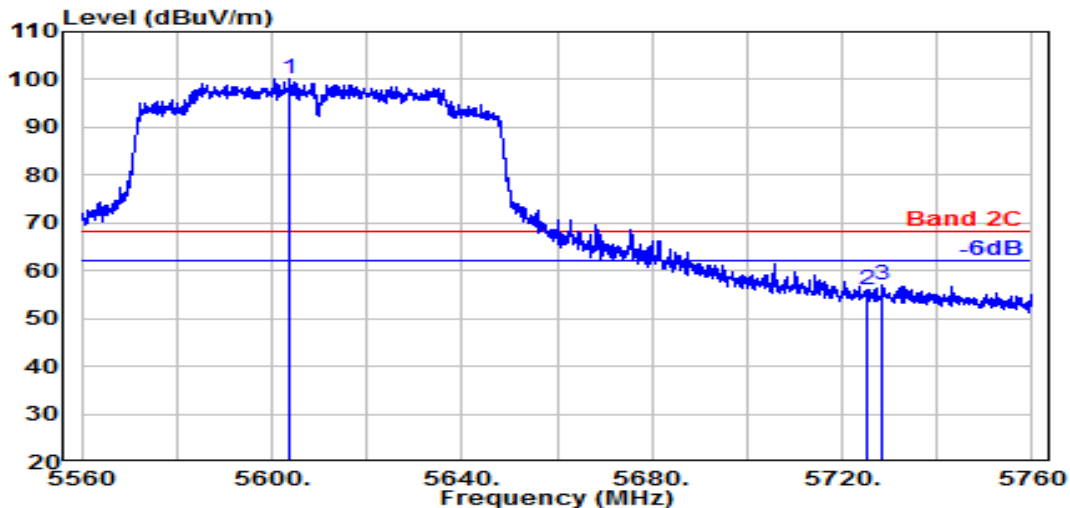


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5603.900	34.41	9.13	34.25	90.97	100.26	---	---	Peak
5725.000	34.85	9.19	34.31	46.32	56.06	68.20	12.14	Peak
5728.400	34.87	9.20	34.31	47.13	56.89	68.20	11.31	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

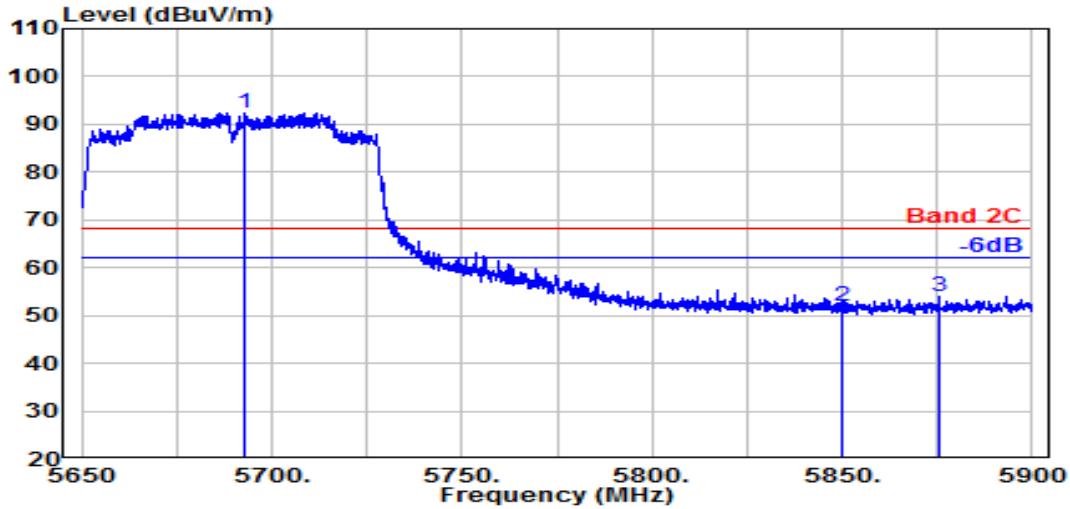

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5693.000	34.67	9.18	34.29	82.91	92.47	---	---	Peak
5850.000	35.40	9.26	34.36	41.53	51.82	68.20	16.38	Peak
5875.600	35.61	9.27	34.37	43.46	53.96	68.20	14.24	Peak

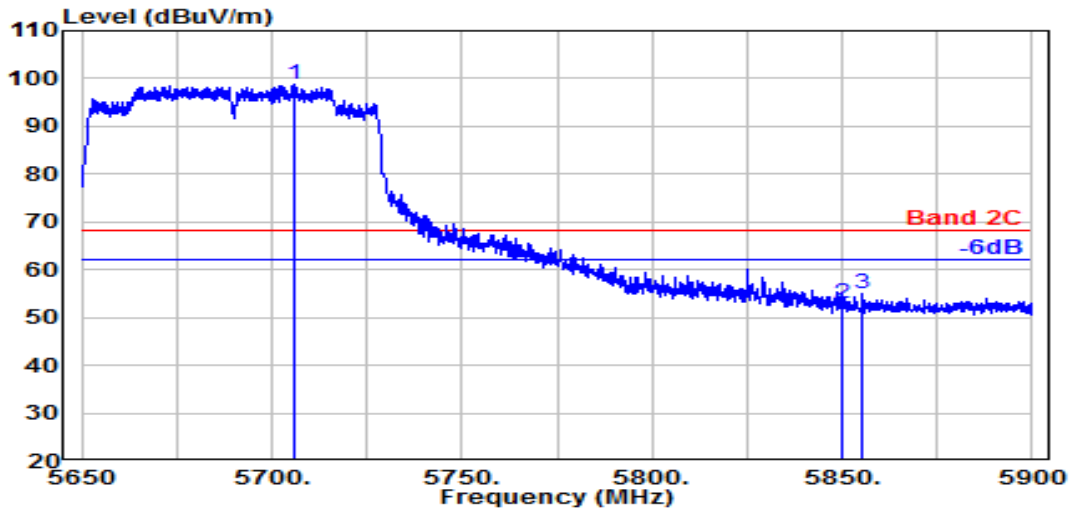


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.200	34.74	9.18	34.30	89.31	98.94	---	---	Peak
5850.000	35.40	9.26	34.36	42.51	52.80	68.20	15.40	Peak
5855.100	35.44	9.26	34.37	44.49	54.83	68.20	13.37	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

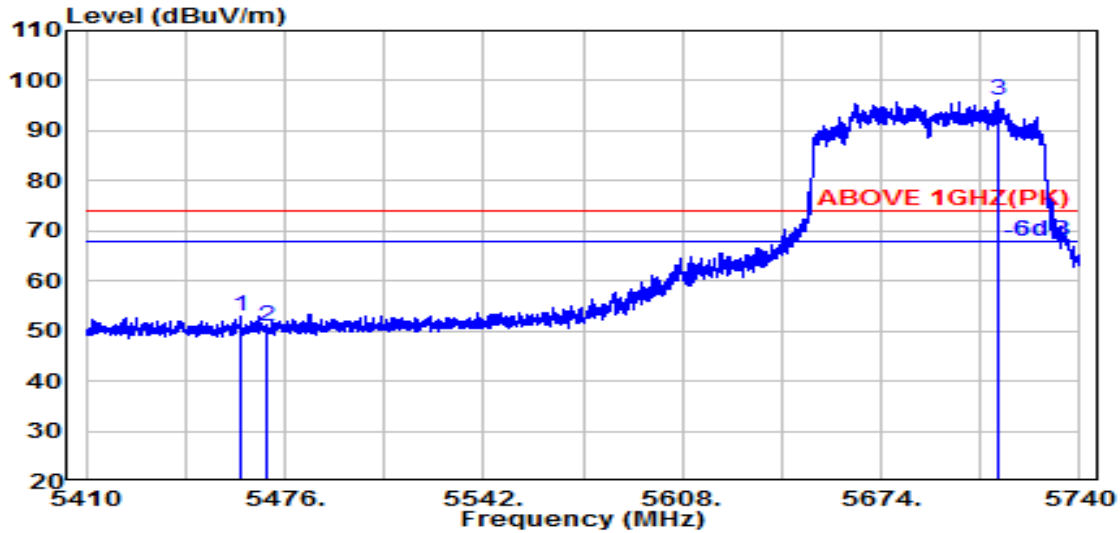

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.400	34.62	9.06	34.21	43.43	52.90	74.00	21.10	Peak
5470.000	34.64	9.06	34.21	41.48	50.97	74.00	23.03	Peak
@ 5712.600	34.78	9.19	34.30	86.45	96.11	---	---	Peak

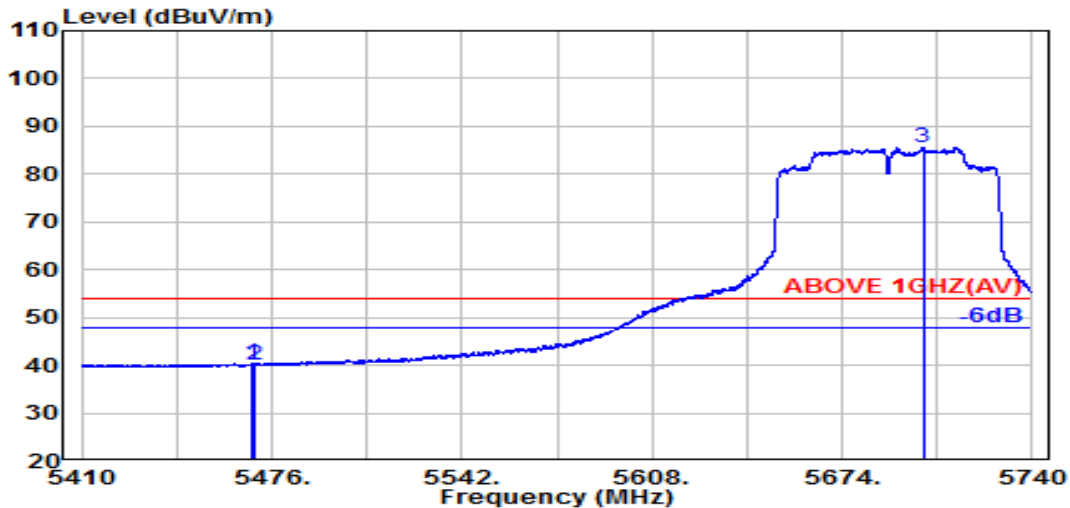


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.64	9.06	34.21	30.91	40.39	54.00	13.61	Average
5470.000	34.64	9.06	34.21	30.56	40.05	54.00	13.95	Average
@ 5702.100	34.71	9.18	34.30	76.08	85.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

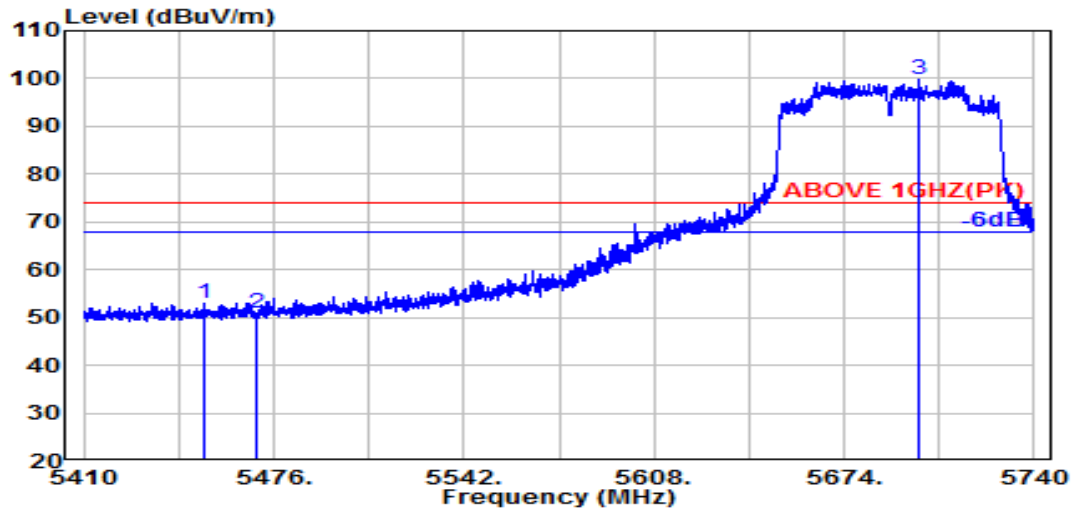

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.100	34.60	9.05	34.22	43.67	53.11	74.00	20.89	Peak
5470.000	34.64	9.06	34.21	41.42	50.91	74.00	23.09	Peak
@ 5700.200	34.70	9.18	34.29	90.34	99.93	---	---	Peak

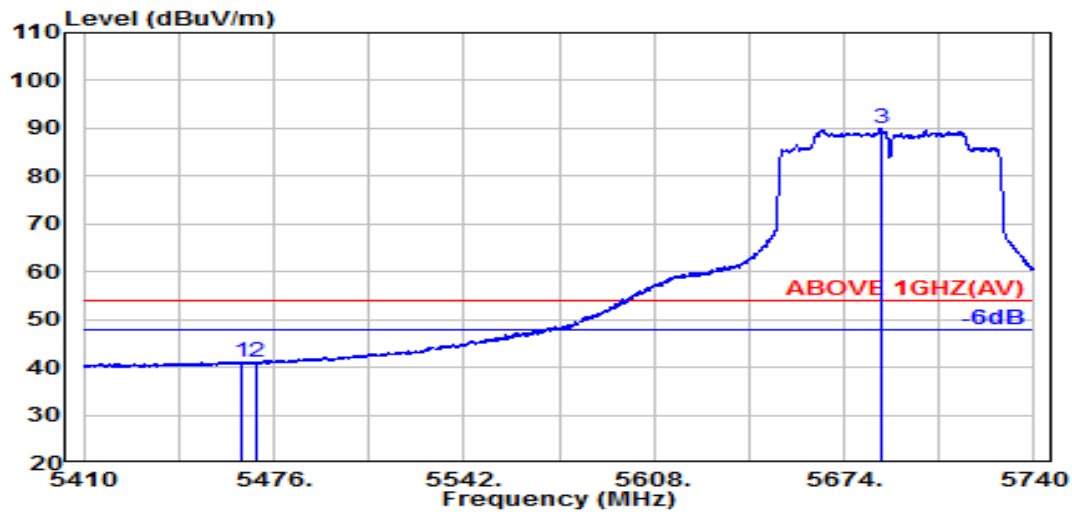


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.63	9.06	34.21	31.75	41.22	54.00	12.78	Average
5470.000	34.64	9.06	34.21	31.53	41.02	54.00	12.98	Average
@ 5686.600	34.65	9.17	34.29	80.52	90.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

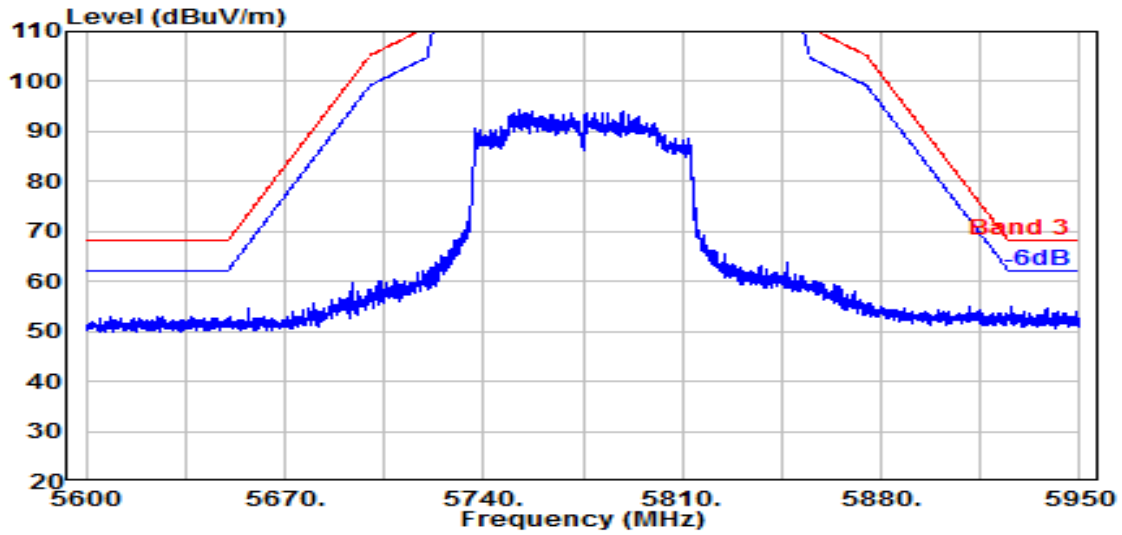

Antenna at Vertical Polarization

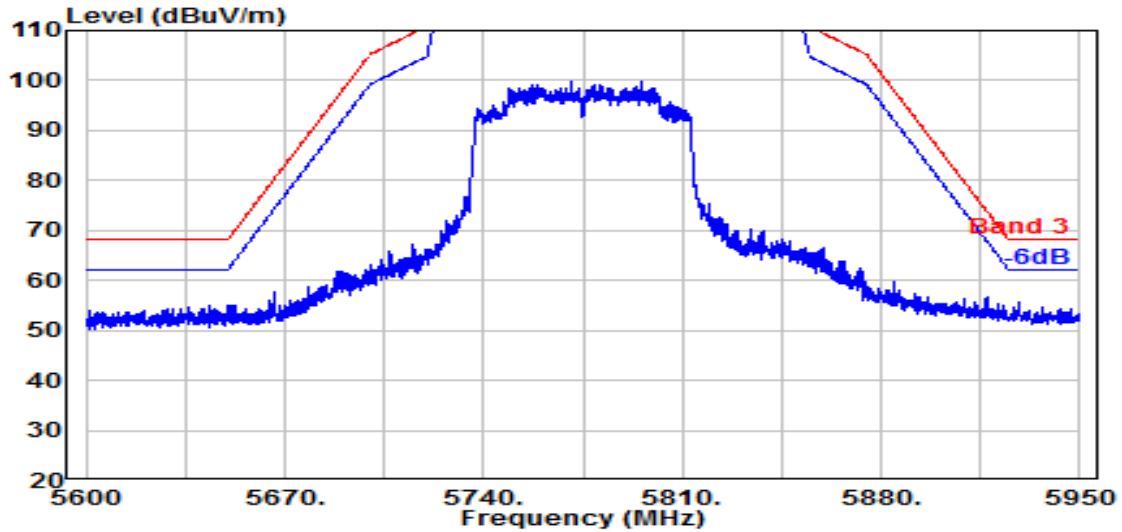


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

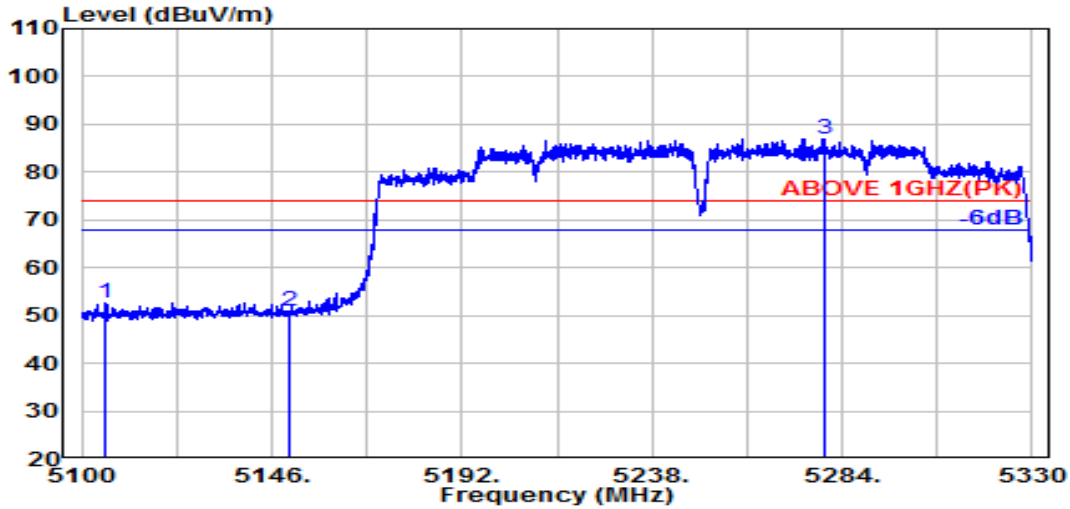

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5105.900	34.24	8.86	34.36	43.89	52.63	74.00	21.37	Peak
5150.000	34.50	8.89	34.34	41.78	50.83	74.00	23.17	Peak
@ 5280.000	34.44	8.96	34.29	77.94	87.05	---	---	Peak

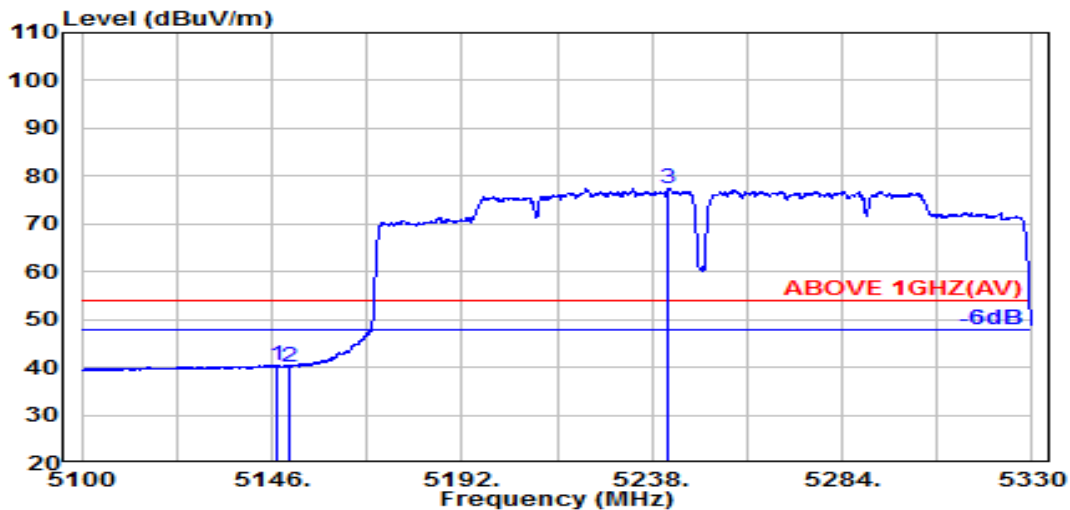


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	34.49	8.88	34.34	31.46	40.50	54.00	13.50	Average
5150.000	34.50	8.89	34.34	31.13	40.18	54.00	13.82	Average
@ 5242.000	34.53	8.94	34.30	68.35	77.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

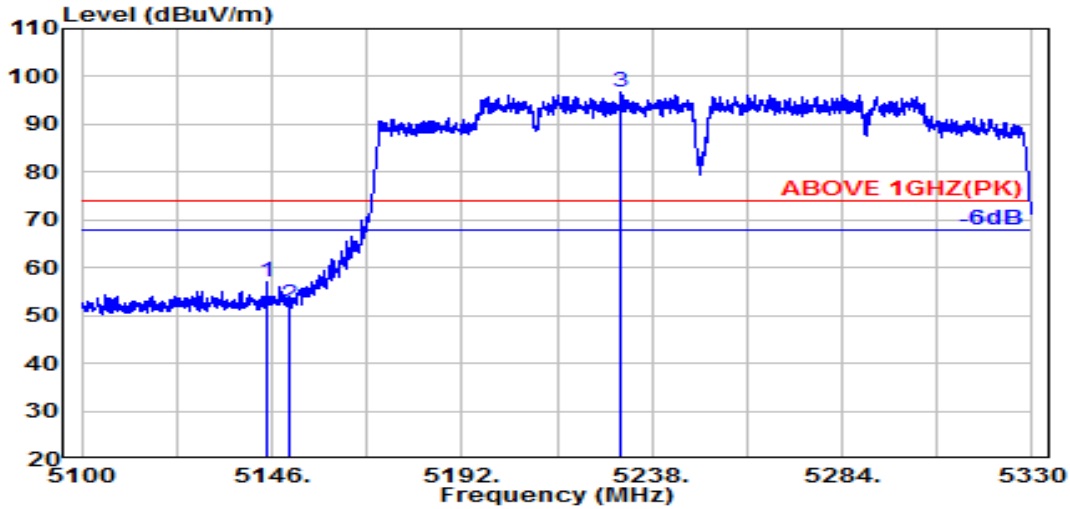

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.900	34.47	8.88	34.34	47.85	56.86	74.00	17.14	Peak
5150.000	34.50	8.89	34.34	43.05	52.10	74.00	21.90	Peak
@ 5230.600	34.58	8.93	34.31	87.47	96.68	---	---	Peak

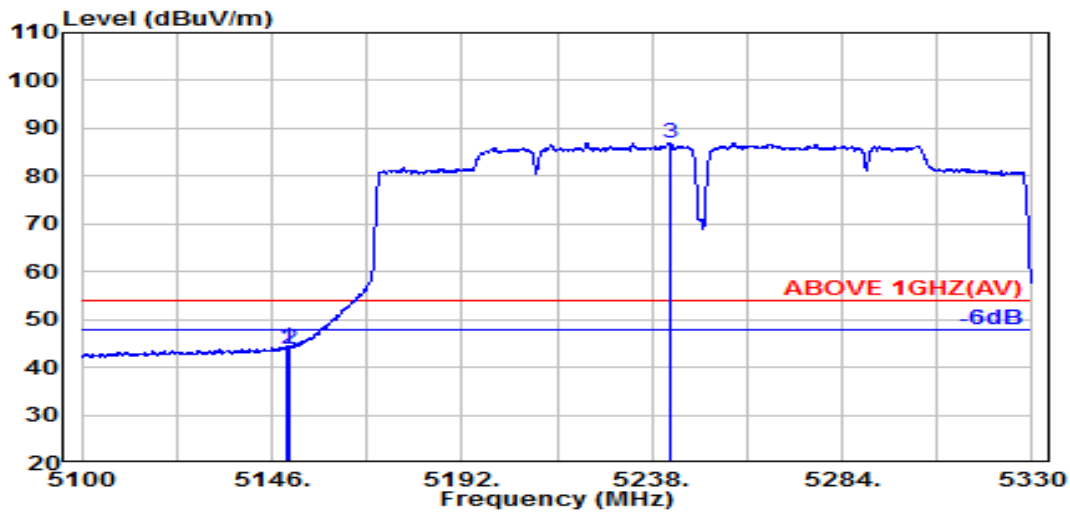


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	34.50	8.89	34.34	35.07	44.11	54.00	9.89	Average
5150.000	34.50	8.89	34.34	34.85	43.90	54.00	10.10	Average
@ 5242.200	34.53	8.94	34.30	77.81	86.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

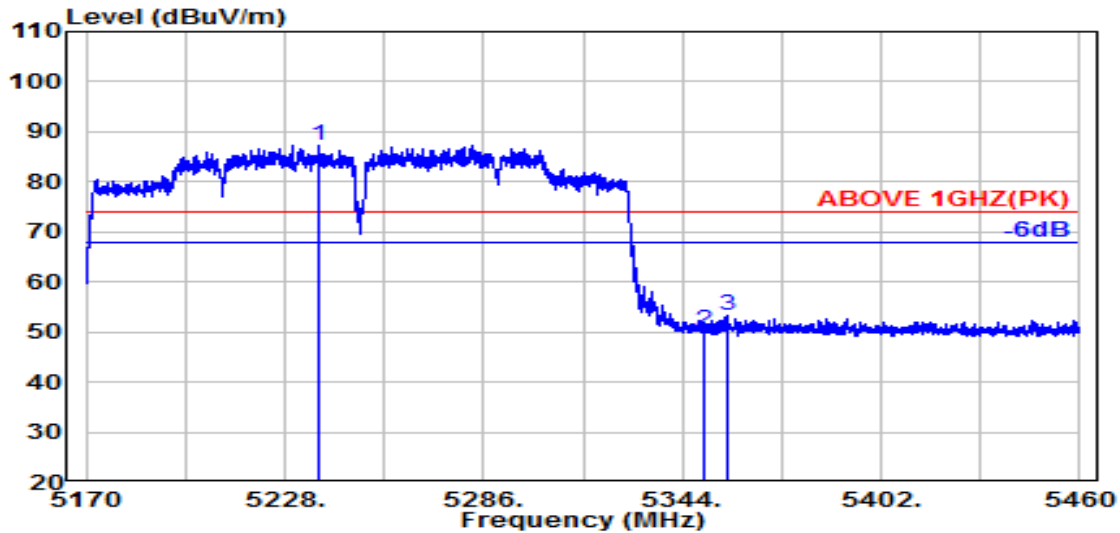

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5237.800	34.55	8.94	34.30	78.19	87.37	---	---	Peak
5350.000	34.90	9.00	34.26	40.43	50.07	74.00	23.93	Peak
5357.000	34.89	9.00	34.26	43.60	53.23	74.00	20.77	Peak

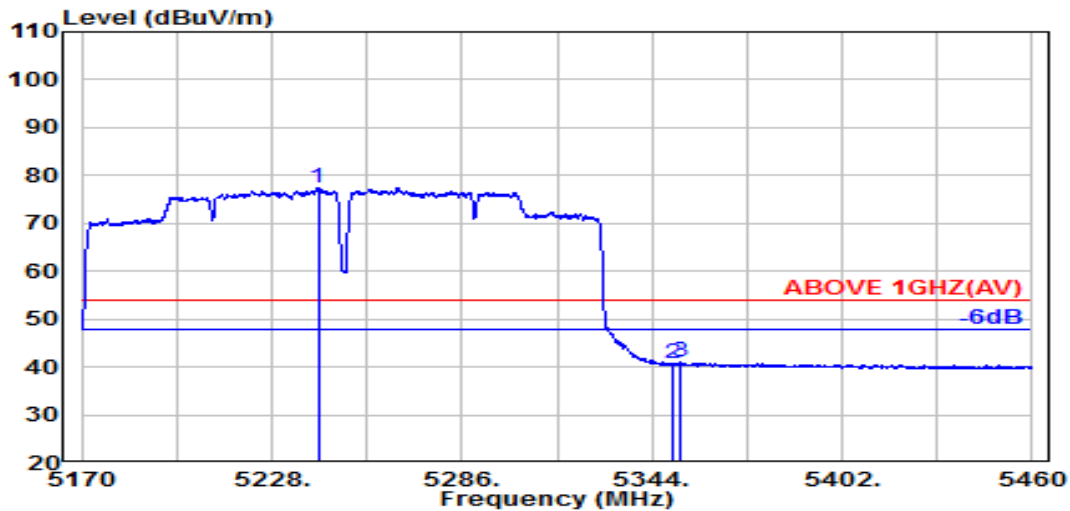


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5242.100	34.53	8.94	34.30	68.15	77.32	---	---	Average
5350.000	34.90	9.00	34.26	31.03	40.67	54.00	13.33	Average
5352.300	34.90	9.00	34.26	31.27	40.91	54.00	13.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

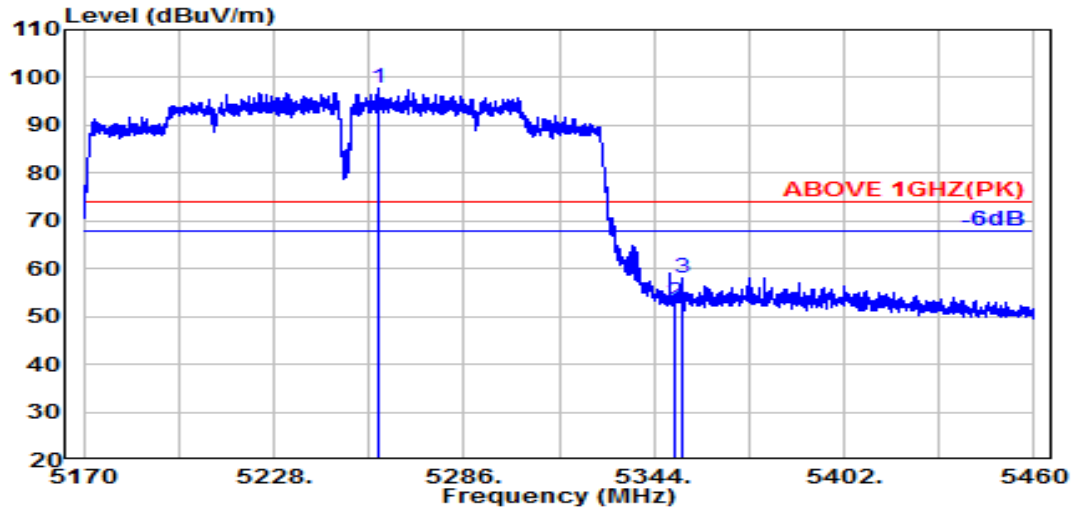

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5259.600	34.48	8.95	34.29	88.61	97.74	---	---	Peak
5350.000	34.90	9.00	34.26	43.21	52.85	74.00	21.15	Peak
5352.300	34.90	9.00	34.26	48.57	58.21	74.00	15.79	Peak

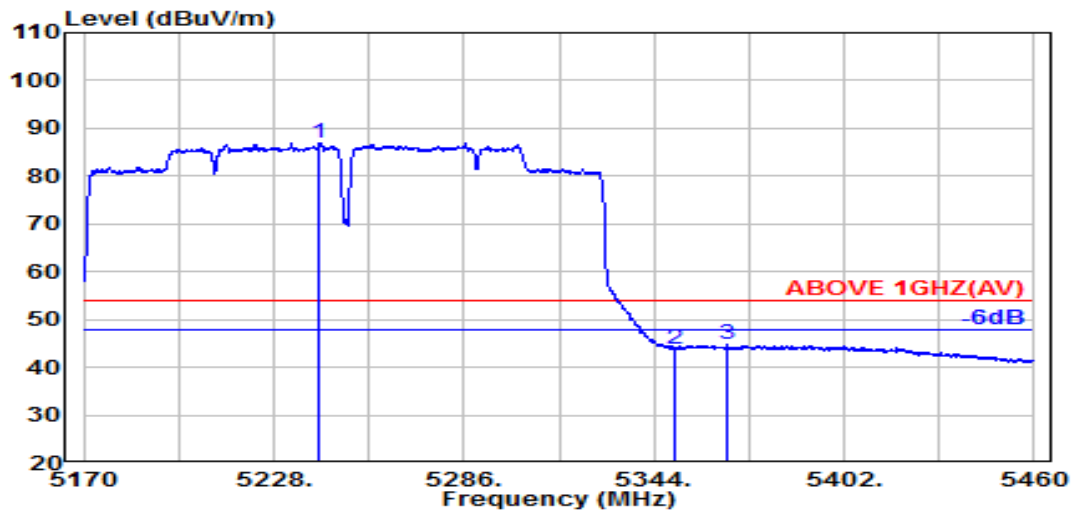


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5242.000	34.53	8.94	34.30	77.73	86.90	---	---	Average
5350.000	34.90	9.00	34.26	34.28	43.92	54.00	10.08	Average
5366.500	34.87	9.01	34.25	35.08	44.70	54.00	9.30	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

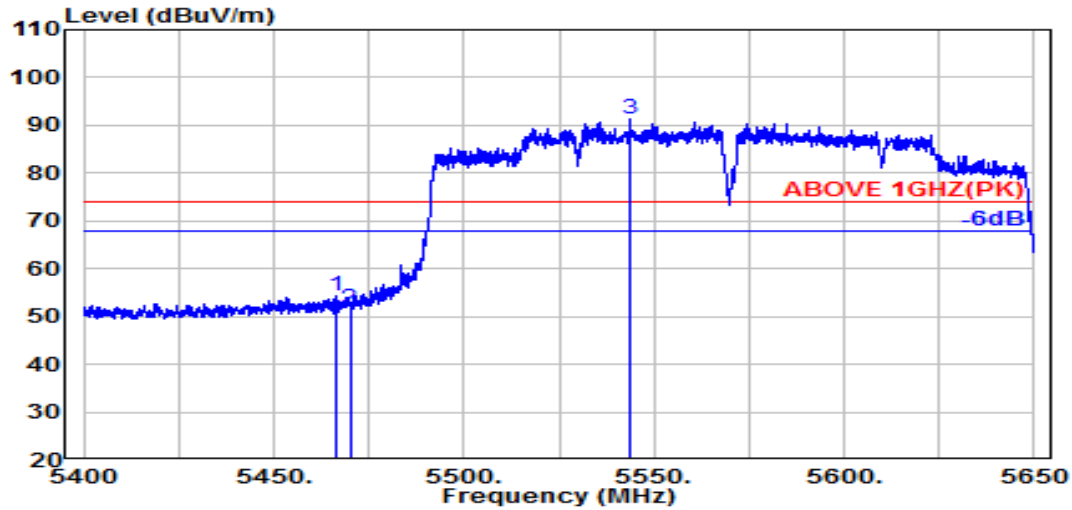

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.63	9.06	34.21	44.86	54.34	74.00	19.66	Peak
5470.000	34.64	9.06	34.21	42.06	51.55	74.00	22.45	Peak
@ 5543.600	34.70	9.10	34.22	81.63	91.21	---	---	Peak

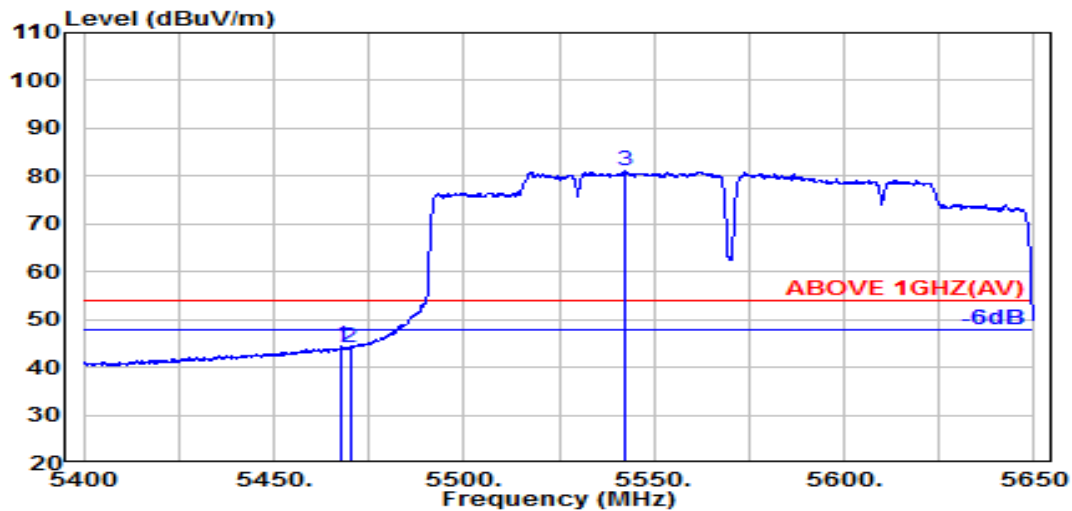


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.64	9.06	34.21	34.82	44.30	54.00	9.70	Average
5470.000	34.64	9.06	34.21	34.52	44.01	54.00	9.99	Average
@ 5542.100	34.70	9.10	34.22	71.42	81.00	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

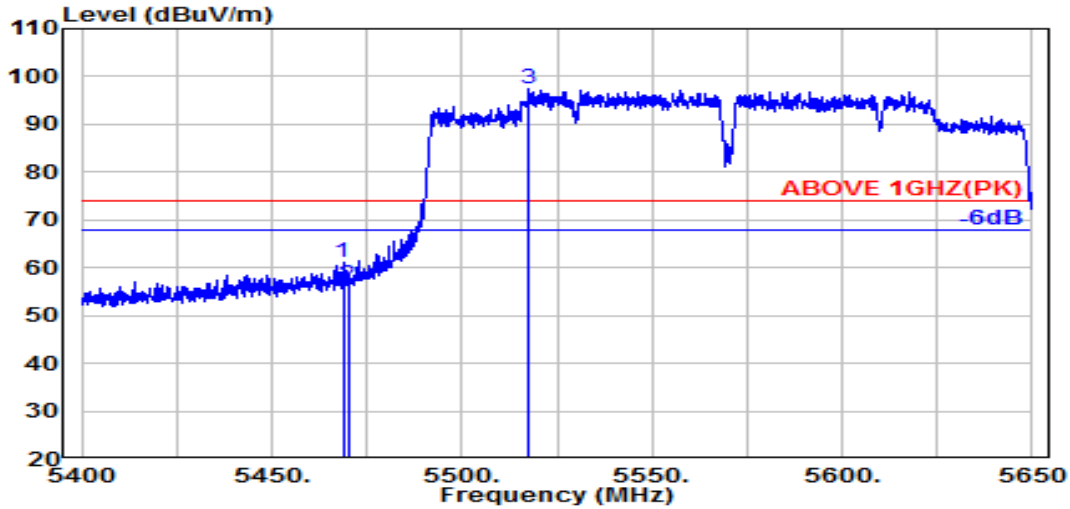

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.64	9.06	34.21	51.45	60.94	74.00	13.06	Peak
5470.000	34.64	9.06	34.21	46.96	56.45	74.00	17.55	Peak
@ 5517.500	34.70	9.09	34.21	87.77	97.35	---	---	Peak

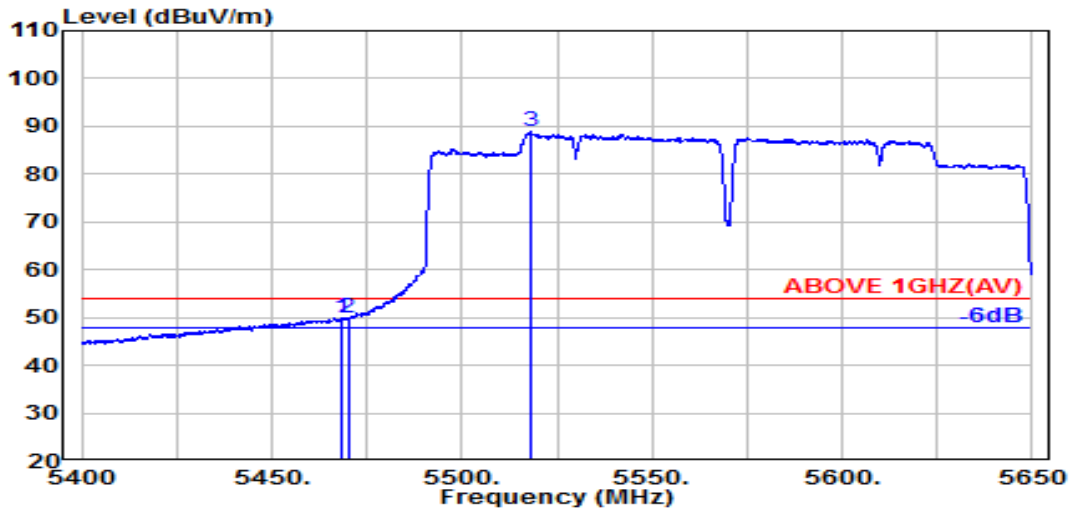


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.64	9.06	34.21	40.43	49.92	54.00	4.08	Average
5470.000	34.64	9.06	34.21	40.24	49.73	54.00	4.27	Average
@ 5517.900	34.70	9.09	34.21	79.29	88.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

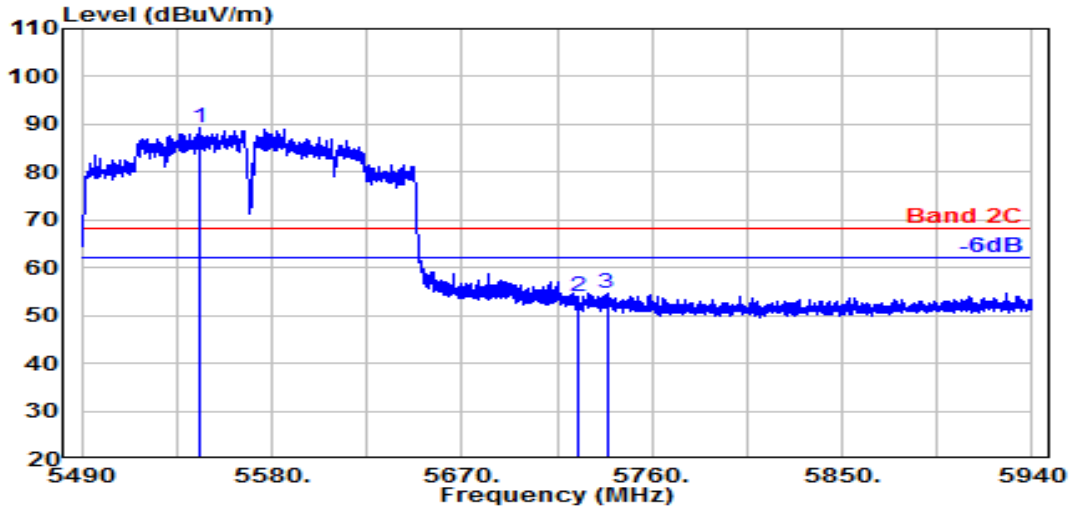

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5545.500	34.70	9.10	34.22	79.58	89.16	---	---	Peak
5725.000	34.85	9.19	34.31	44.23	53.97	68.20	14.23	Peak
5738.600	34.93	9.20	34.31	44.90	54.72	68.20	13.48	Peak

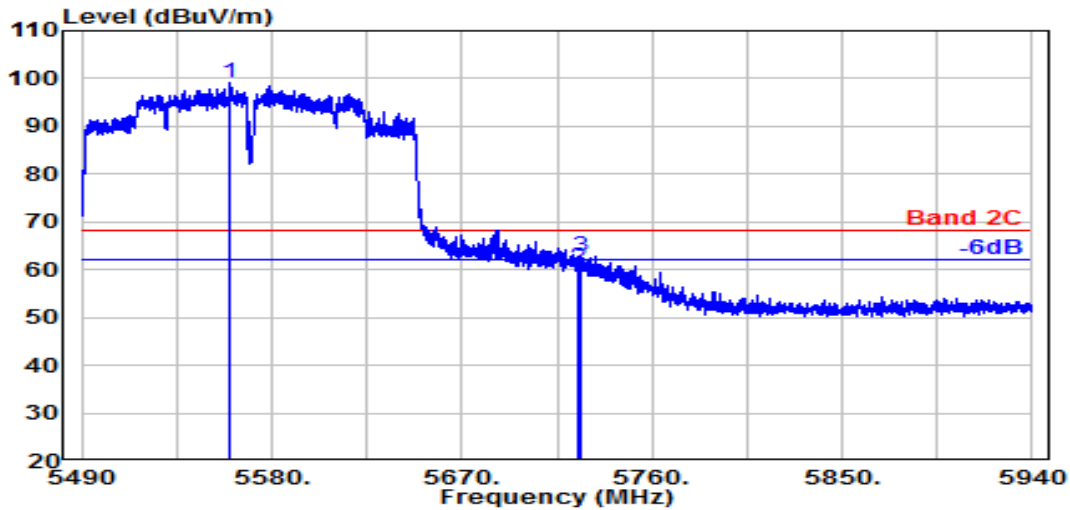


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5560.100	34.64	9.11	34.23	89.73	99.25	---	---	Peak
5725.000	34.85	9.19	34.31	50.84	60.58	68.20	7.62	Peak
5726.300	34.86	9.19	34.31	52.96	62.71	68.20	5.49	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

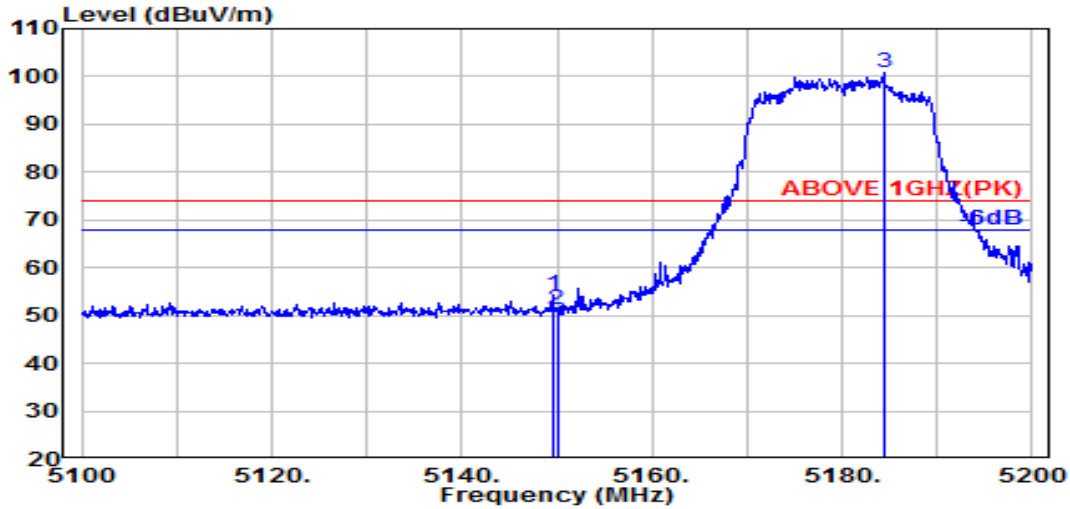

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.89	34.34	45.40	54.45	74.00	19.55	Peak
5150.000	34.50	8.89	34.34	42.29	51.33	74.00	22.67	Peak
@ 5184.400	34.64	8.91	34.32	91.46	100.68	---	---	Peak

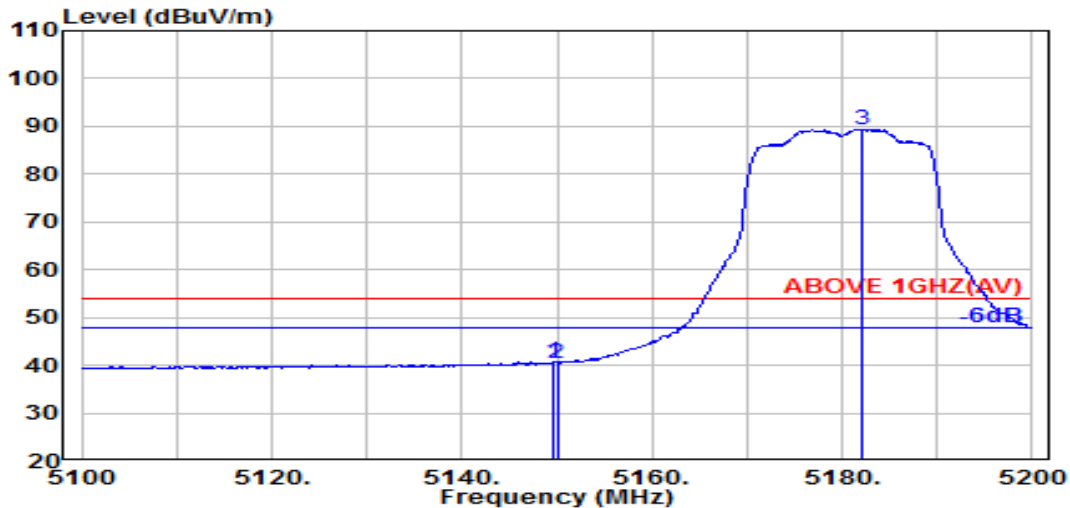


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	31.57	40.61	54.00	13.39	Average
5150.000	34.50	8.89	34.34	31.45	40.50	54.00	13.50	Average
@ 5182.000	34.63	8.90	34.32	80.22	89.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

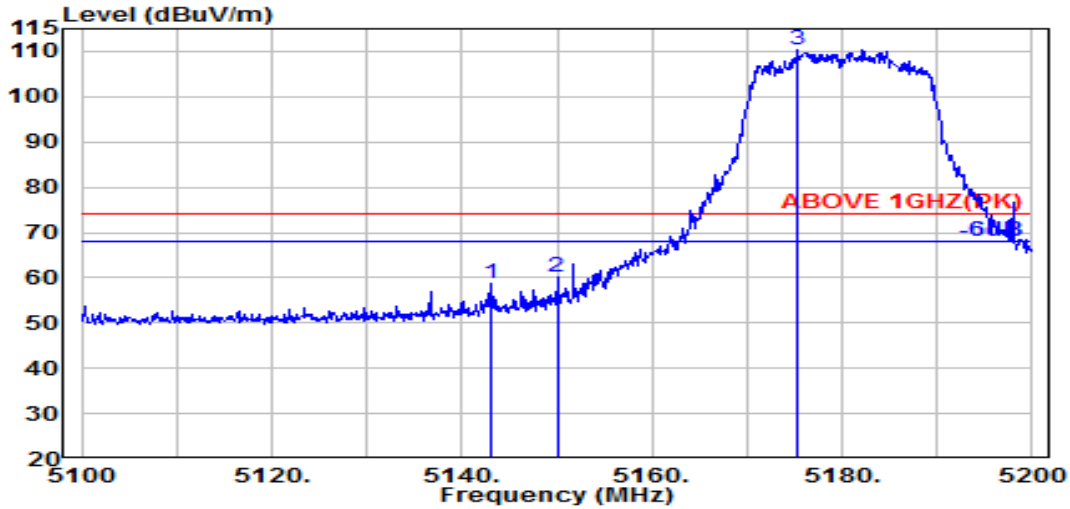

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.000	34.46	8.88	34.34	49.66	58.66	74.00	15.34	Peak
5150.000	34.50	8.89	34.34	50.98	60.03	74.00	13.97	Peak
@ 5175.300	34.60	8.90	34.33	101.13	110.31	---	---	Peak

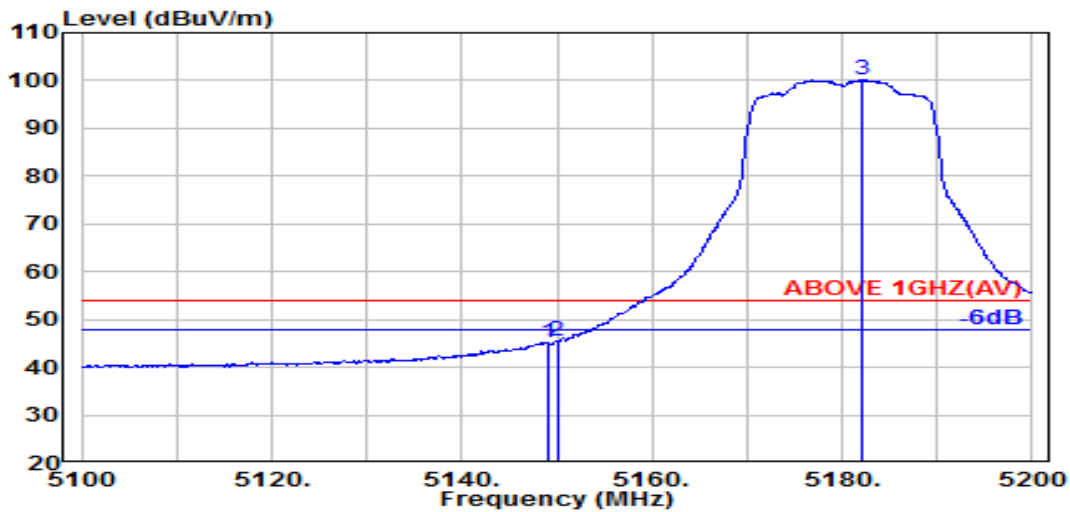


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.50	8.89	34.34	36.16	45.20	54.00	8.80	Average
5150.000	34.50	8.89	34.34	36.33	45.38	54.00	8.62	Average
@ 5182.200	34.63	8.90	34.32	90.88	100.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

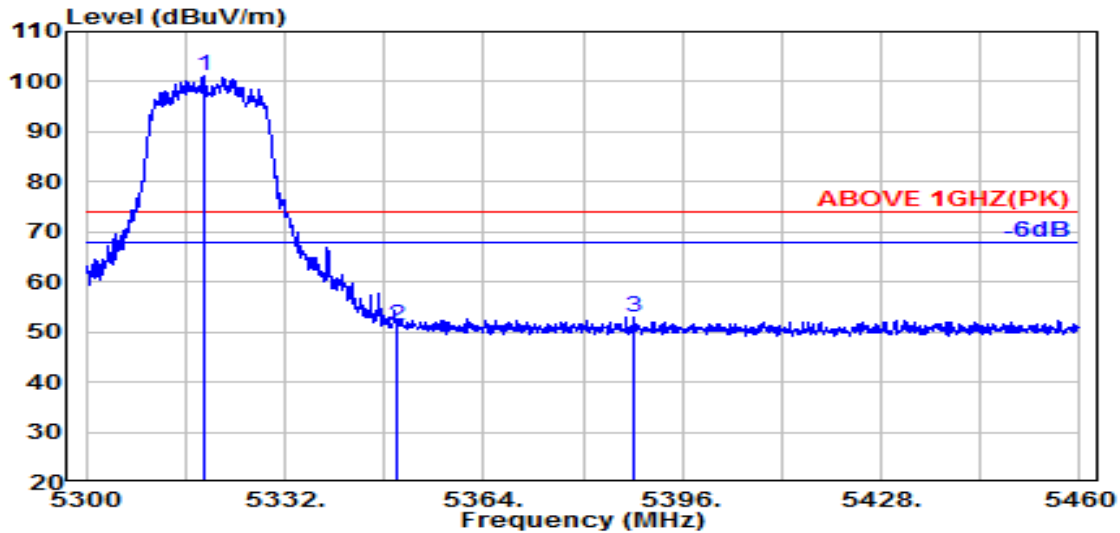

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.900	34.59	8.98	34.27	91.86	101.16	---	---	Peak
5350.000	34.90	9.00	34.26	41.52	51.16	74.00	22.84	Peak
5388.200	34.82	9.02	34.24	43.22	52.82	74.00	21.18	Peak

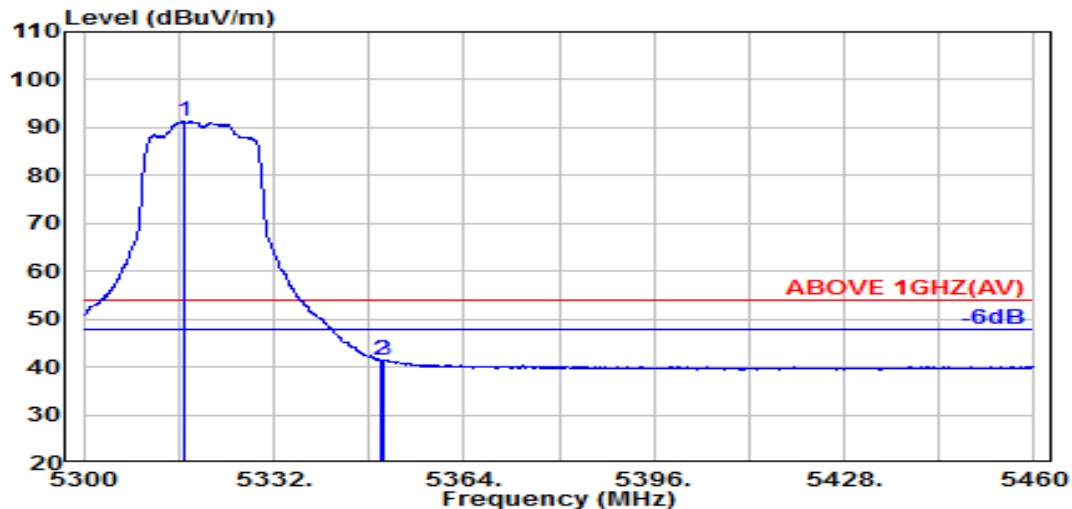


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.57	8.98	34.27	82.03	91.30	---	---	Average
5350.000	34.90	9.00	34.26	31.69	41.33	54.00	12.67	Average
5350.400	34.90	9.00	34.26	31.79	41.42	54.00	12.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

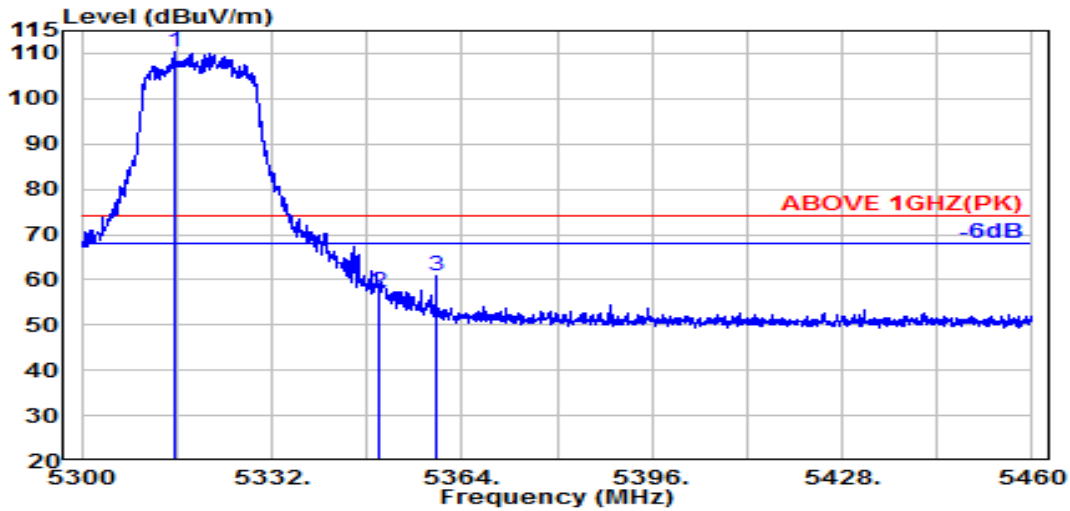

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.500	34.56	8.98	34.27	101.00	110.26	---	---	Peak
5350.000	34.90	9.00	34.26	47.64	57.28	74.00	16.72	Peak
5359.600	34.88	9.00	34.25	51.18	60.81	74.00	13.19	Peak

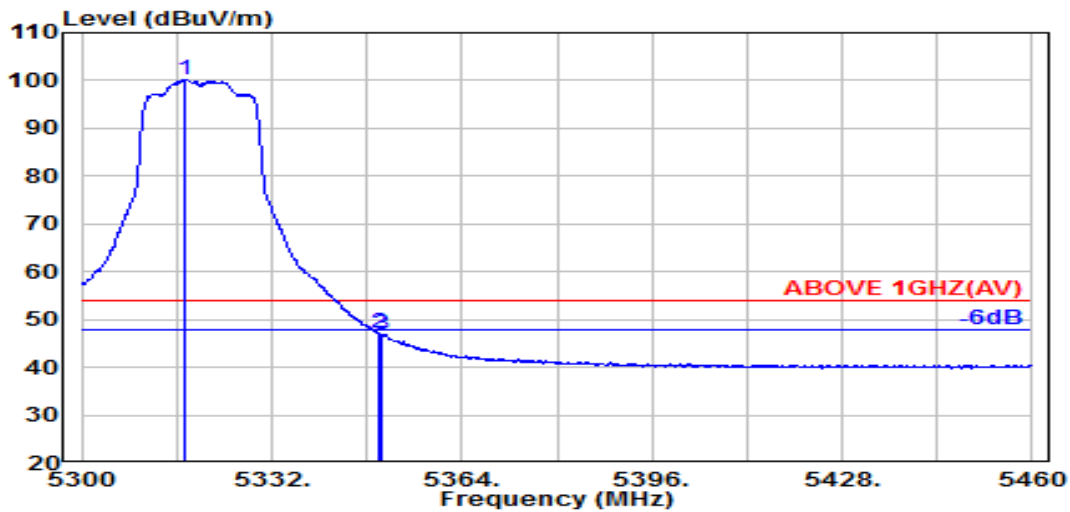


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.500	34.58	8.98	34.27	90.92	100.20	---	---	Average
5350.000	34.90	9.00	34.26	37.52	47.16	54.00	6.84	Average
5350.500	34.90	9.00	34.26	37.34	46.98	54.00	7.02	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

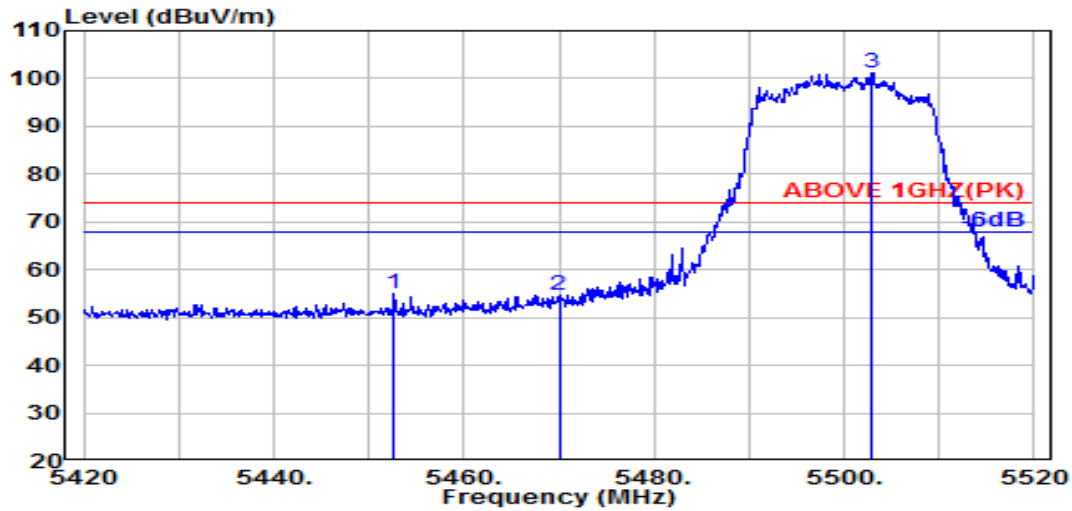

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.700	34.61	9.05	34.22	45.44	54.88	74.00	19.12	Peak
5470.000	34.64	9.06	34.21	45.11	54.60	74.00	19.40	Peak
@ 5503.000	34.70	9.08	34.20	91.76	101.34	---	---	Peak

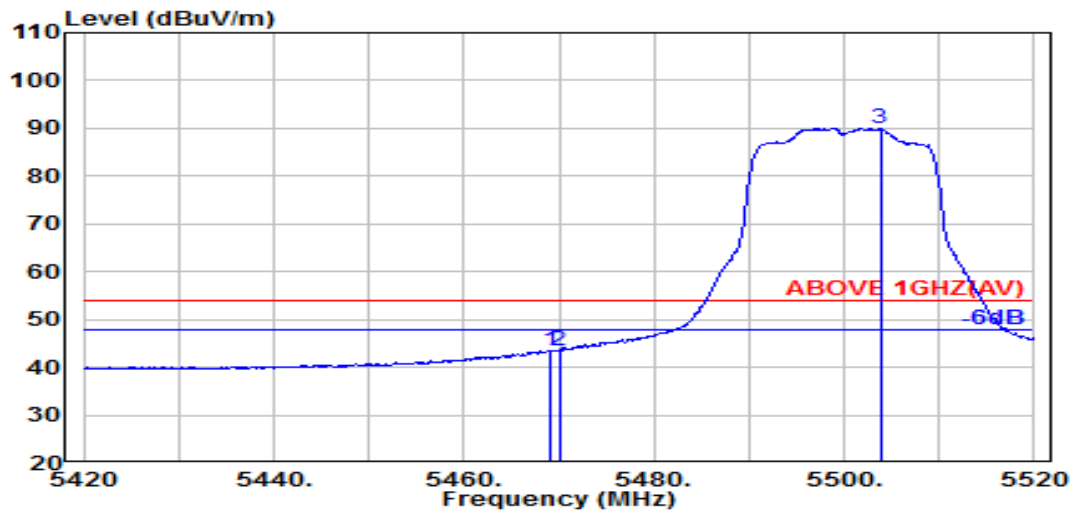


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	33.93	43.42	54.00	10.58	Average
5470.000	34.64	9.06	34.21	34.10	43.59	54.00	10.41	Average
@ 5503.800	34.70	9.08	34.20	80.47	90.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

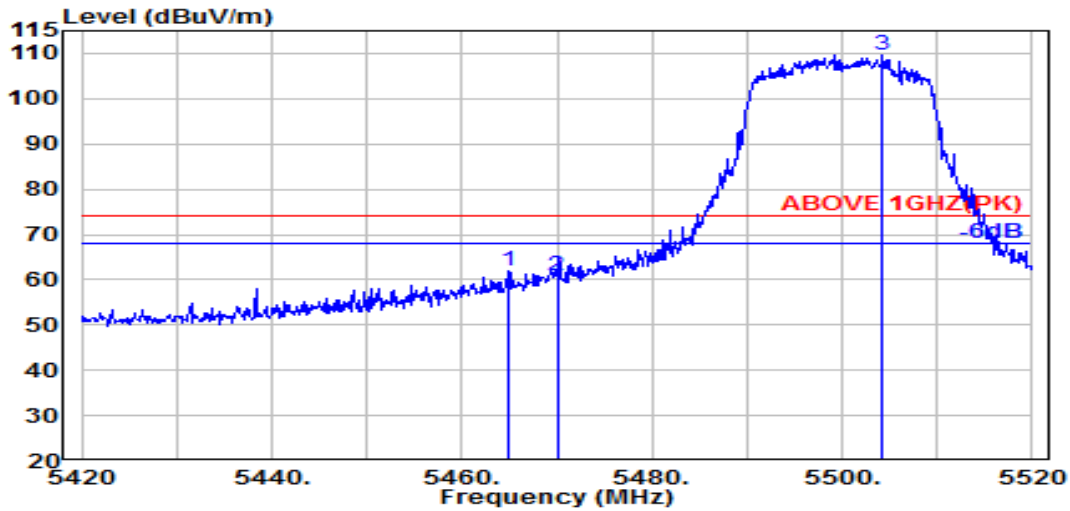

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.800	34.63	9.06	34.21	52.54	62.02	74.00	11.98	Peak
5470.000	34.64	9.06	34.21	51.38	60.87	74.00	13.13	Peak
@ 5504.200	34.70	9.08	34.20	100.04	109.61	---	---	Peak

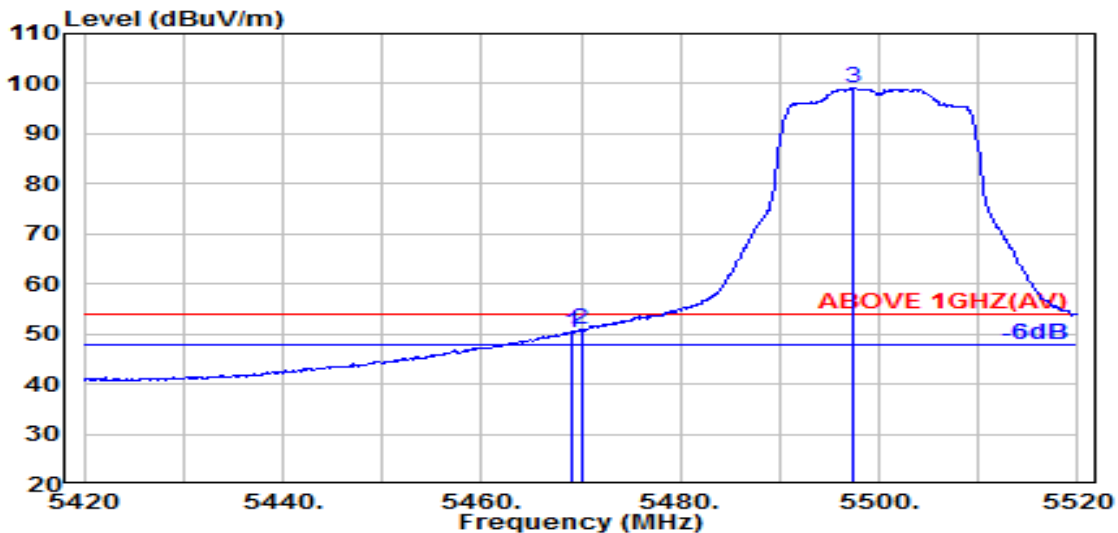


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	40.79	50.28	54.00	3.72	Average
5470.000	34.64	9.06	34.21	41.48	50.97	54.00	3.03	Average
@ 5497.300	34.69	9.08	34.20	89.49	99.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

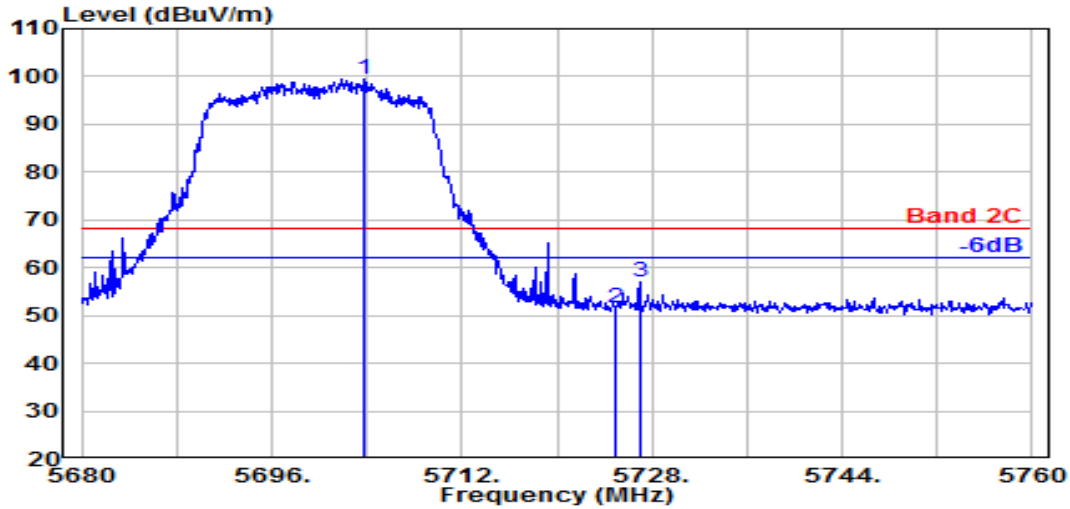

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.680	34.72	9.18	34.30	90.00	99.61	---	---	Peak
5725.000	34.85	9.19	34.31	41.85	51.59	68.20	16.61	Peak
5726.960	34.86	9.19	34.31	47.19	56.94	68.20	11.26	Peak

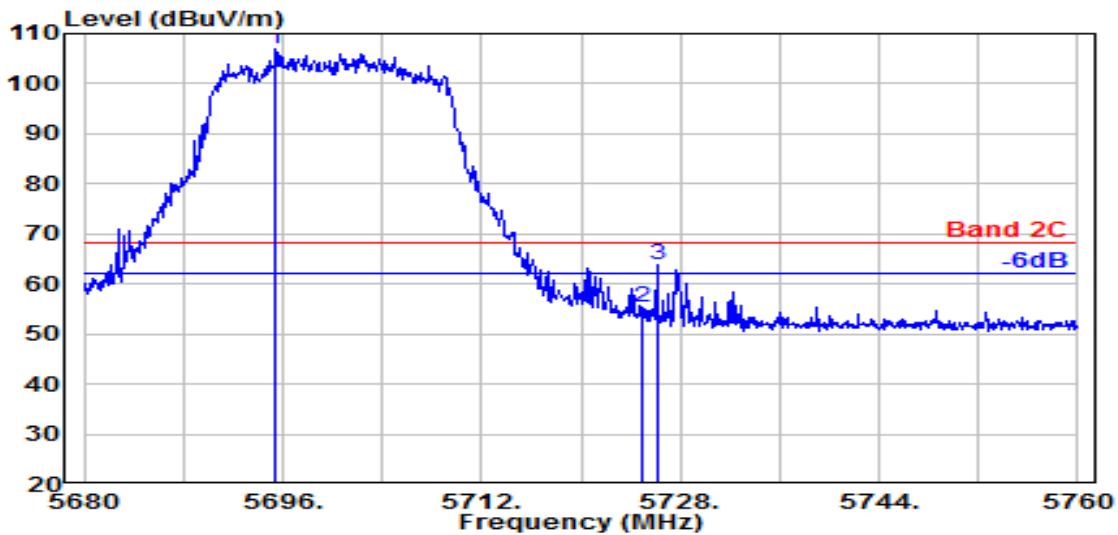


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.360	34.68	9.18	34.29	97.22	106.79	---	---	Peak
5725.000	34.85	9.19	34.31	45.70	55.43	68.20	12.77	Peak
5726.160	34.86	9.19	34.31	54.00	63.74	68.20	4.46	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

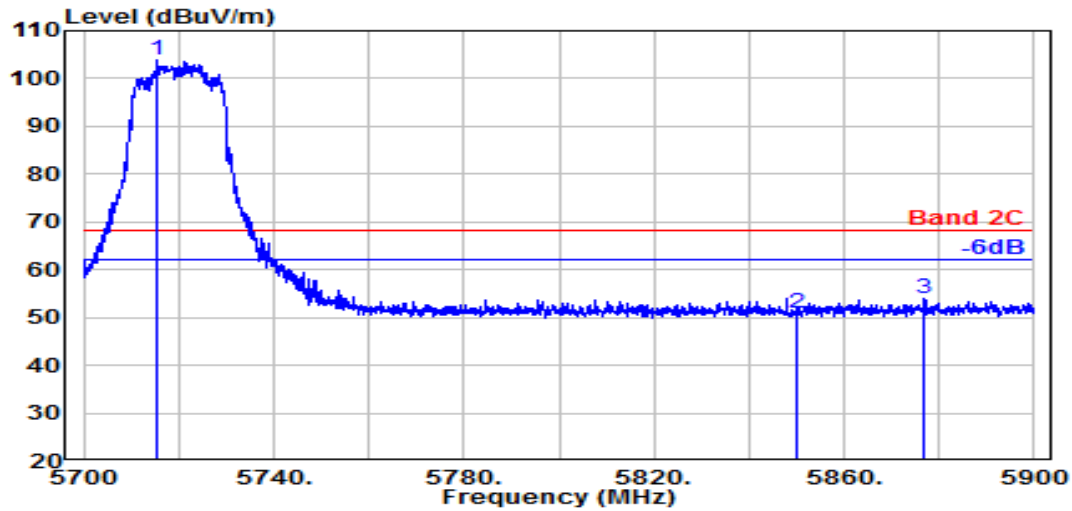

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.500	34.79	9.19	34.30	94.30	103.98	---	---	Peak
5850.000	35.40	9.26	34.36	40.72	51.02	68.20	17.18	Peak
5877.000	35.62	9.27	34.38	43.57	54.08	68.20	14.12	Peak

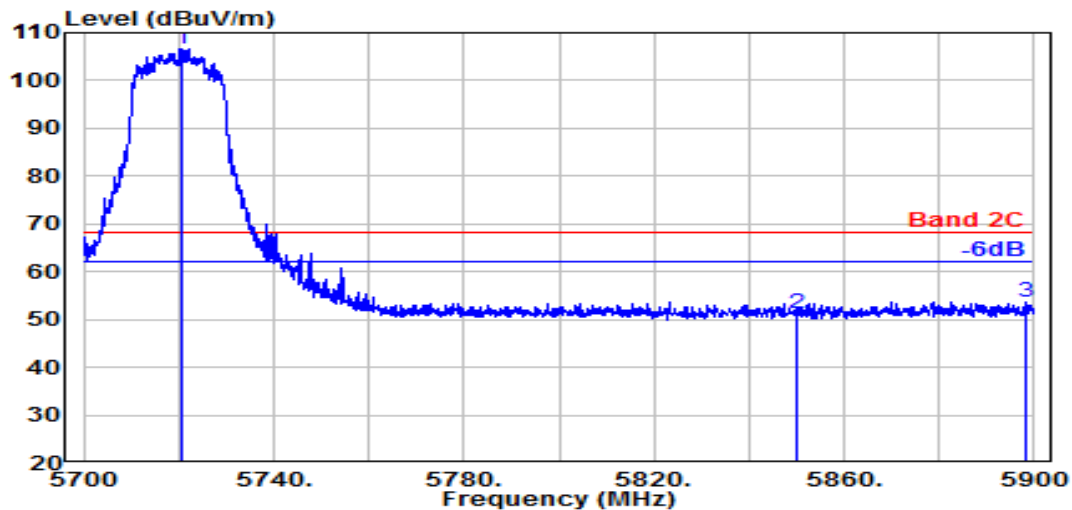


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.400	34.82	9.19	34.30	96.92	106.63	---	---	Peak
5850.000	35.40	9.26	34.36	40.83	51.13	68.20	17.07	Peak
5898.400	35.79	9.28	34.38	43.08	53.77	68.20	14.43	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

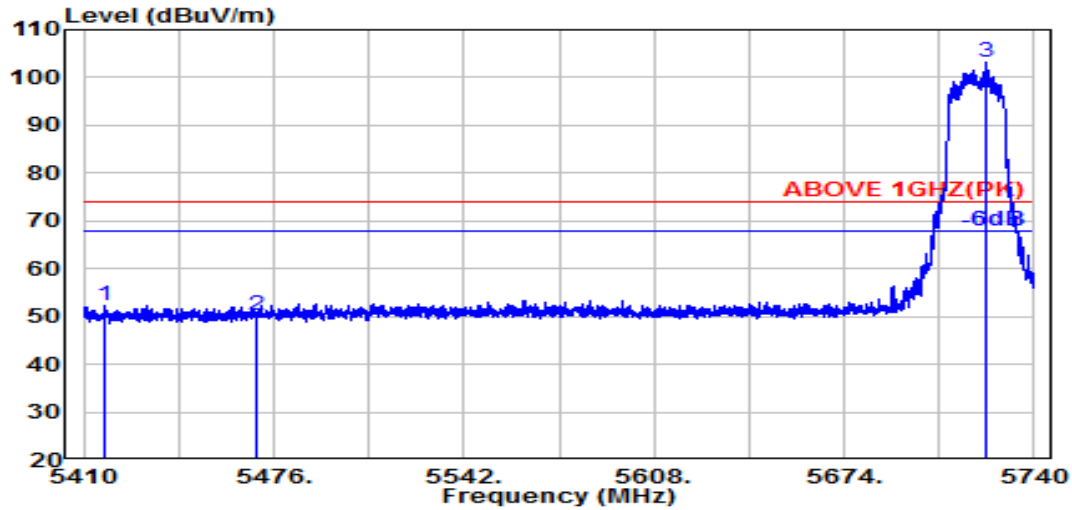

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.600	34.73	9.03	34.23	42.74	52.27	74.00	21.73	Peak
5470.000	34.64	9.06	34.21	40.76	50.25	74.00	23.75	Peak
@ 5723.000	34.84	9.19	34.31	93.45	103.18	---	---	Peak

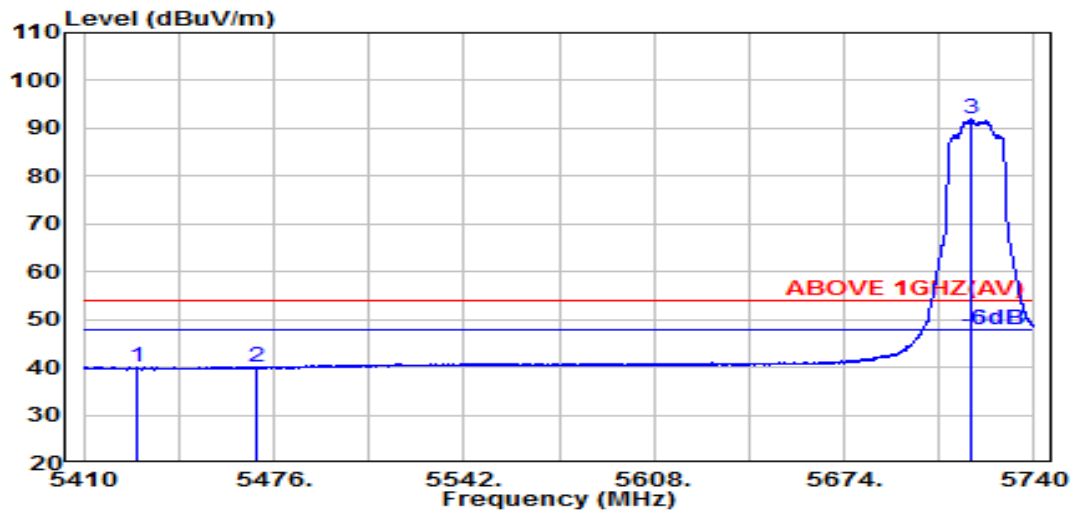


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.500	34.69	9.04	34.23	30.60	40.10	54.00	13.90	Average
5470.000	34.64	9.06	34.21	30.41	39.90	54.00	14.10	Average
@ 5718.300	34.81	9.19	34.30	82.14	91.84	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

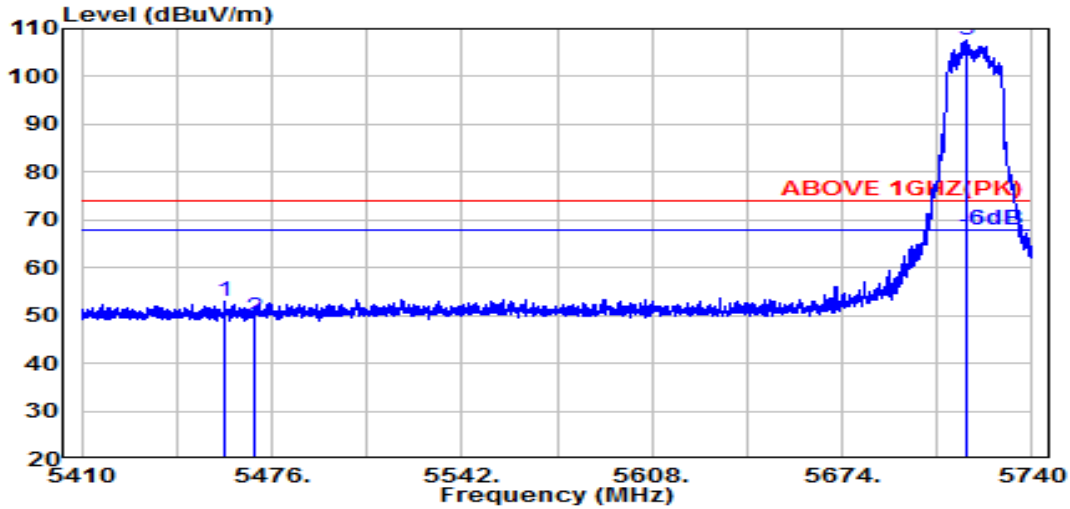

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.700	34.62	9.06	34.22	43.42	52.88	74.00	21.12	Peak
5470.000	34.64	9.06	34.21	40.15	49.64	74.00	24.36	Peak
@ 5717.300	34.80	9.19	34.30	97.95	107.64	---	---	Peak

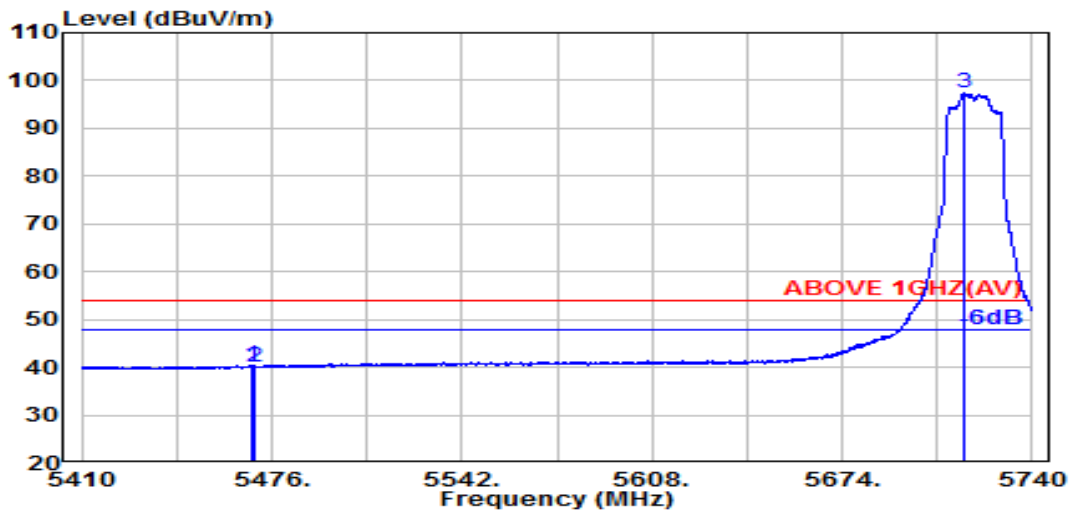


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.64	9.06	34.21	30.87	40.36	54.00	13.64	Average
5470.000	34.64	9.06	34.21	30.63	40.11	54.00	13.89	Average
@ 5716.500	34.80	9.19	34.30	87.76	97.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

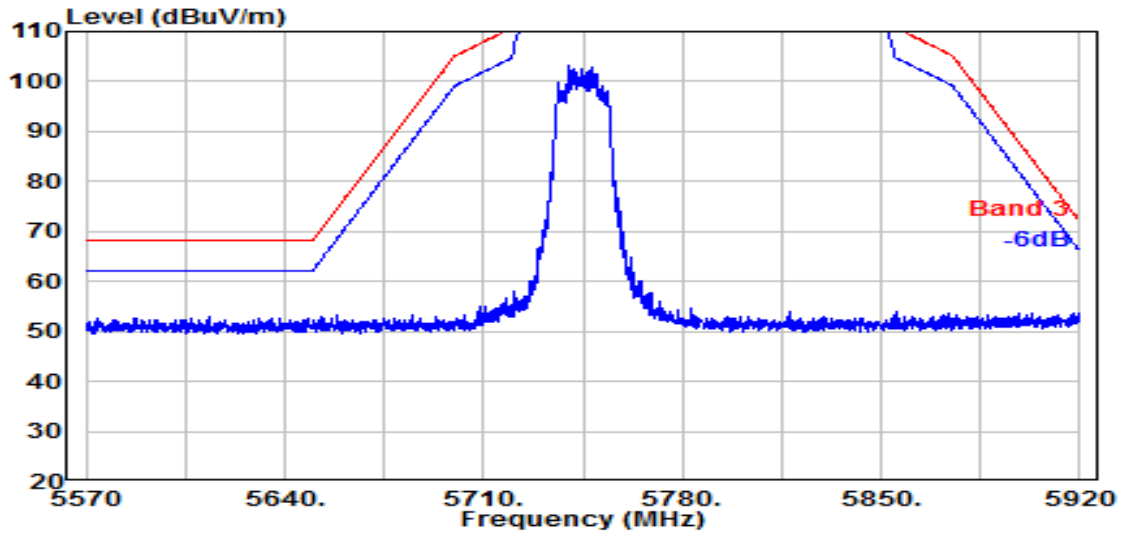


Antenna at Vertical Polarization

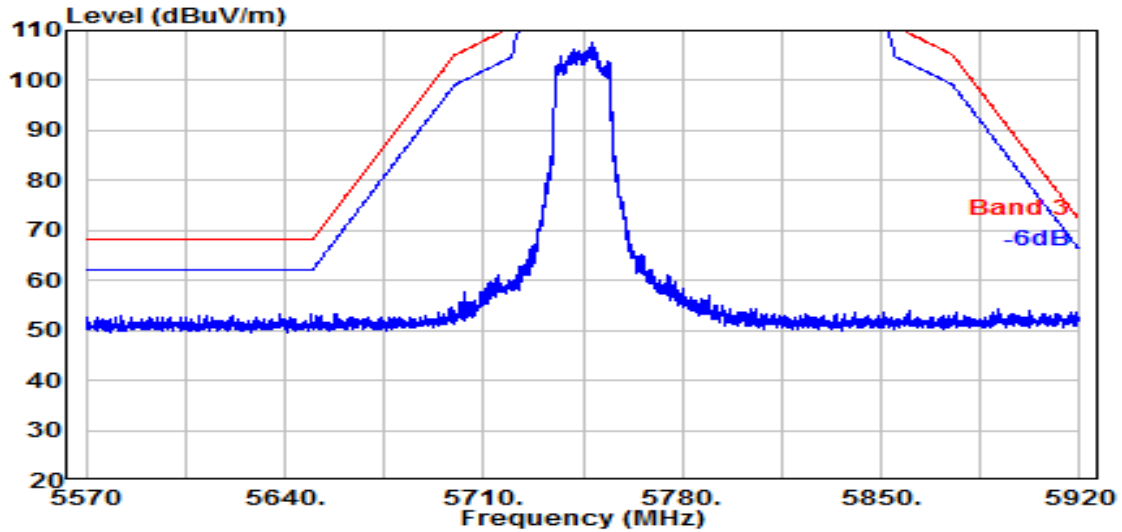


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

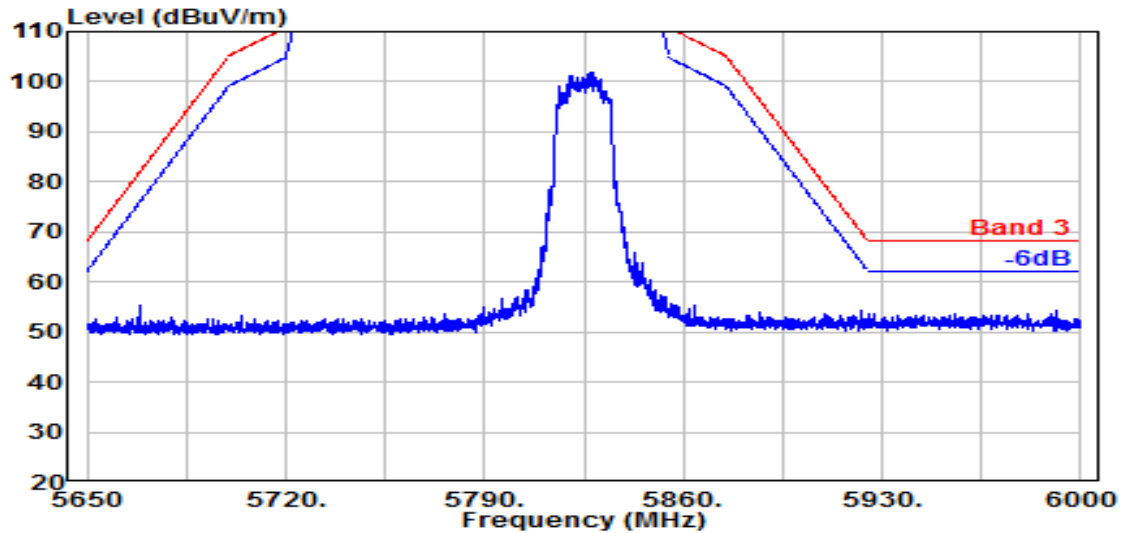

Antenna at Vertical Polarization

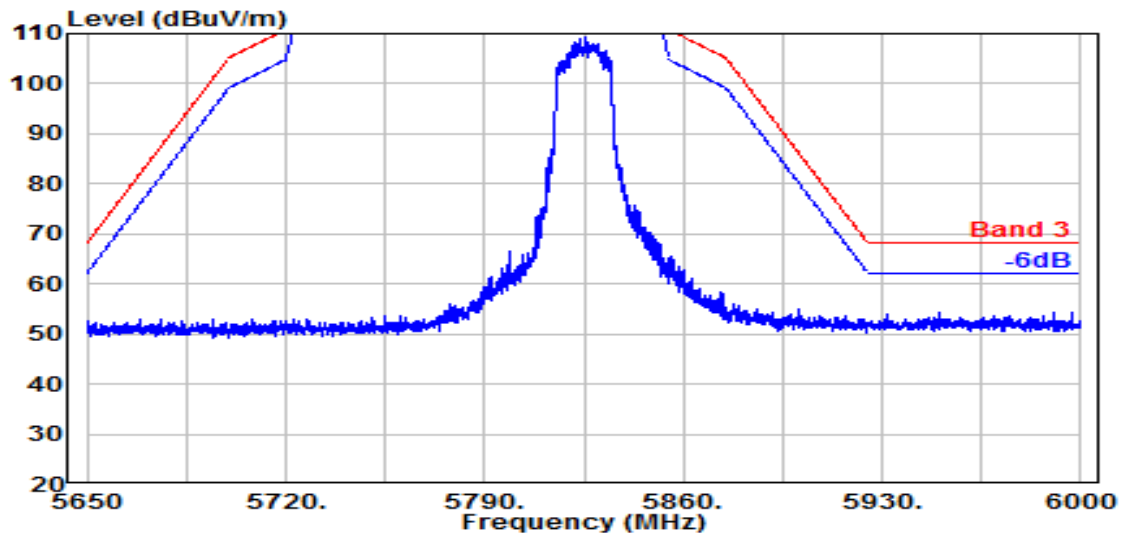


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

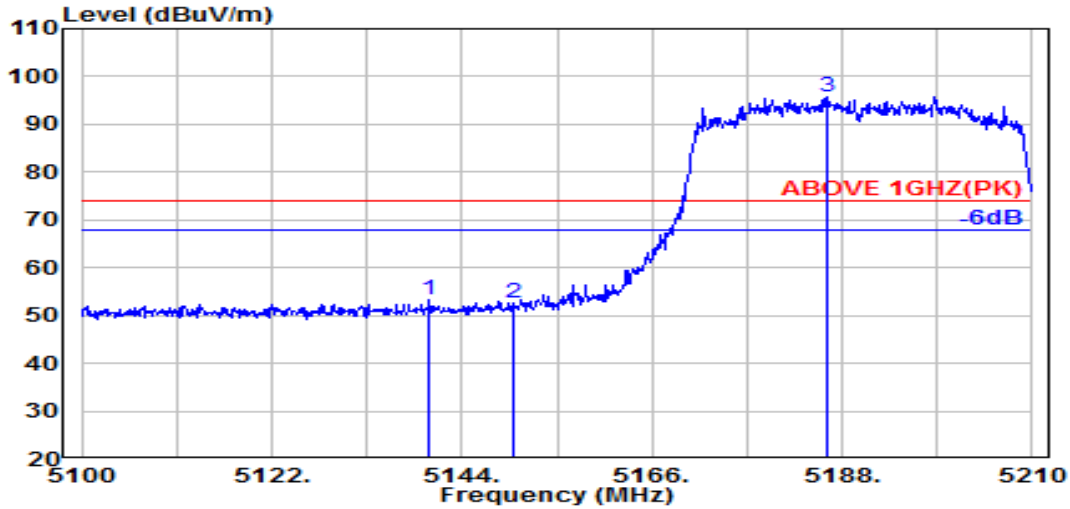

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.260	34.44	8.88	34.34	44.17	53.15	74.00	20.85	Peak
5150.000	34.50	8.89	34.34	43.53	52.58	74.00	21.42	Peak
@ 5186.350	34.65	8.91	34.32	86.67	95.90	---	---	Peak

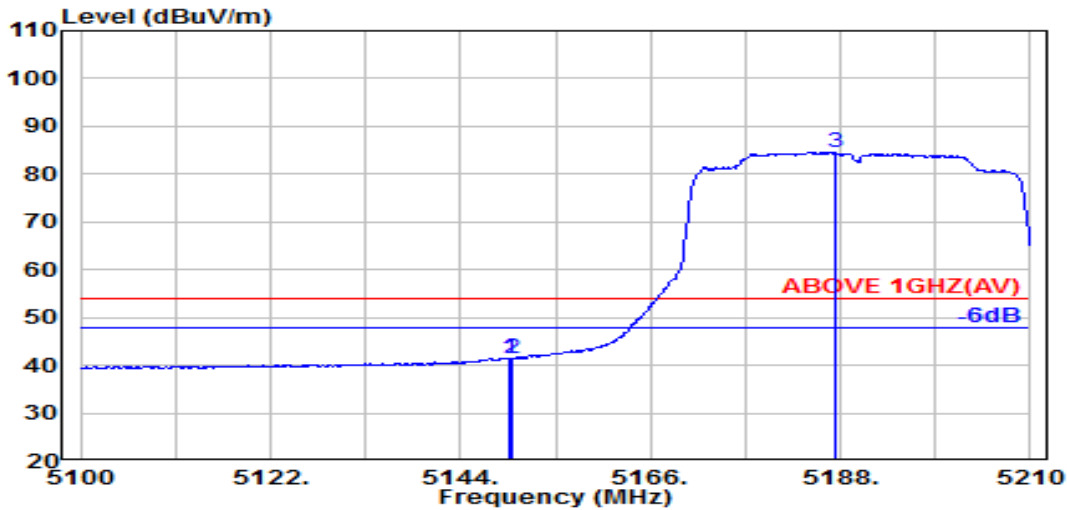


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.50	8.89	34.34	32.44	41.49	54.00	12.51	Average
5150.000	34.50	8.89	34.34	32.42	41.46	54.00	12.54	Average
@ 5187.340	34.65	8.91	34.32	75.26	84.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

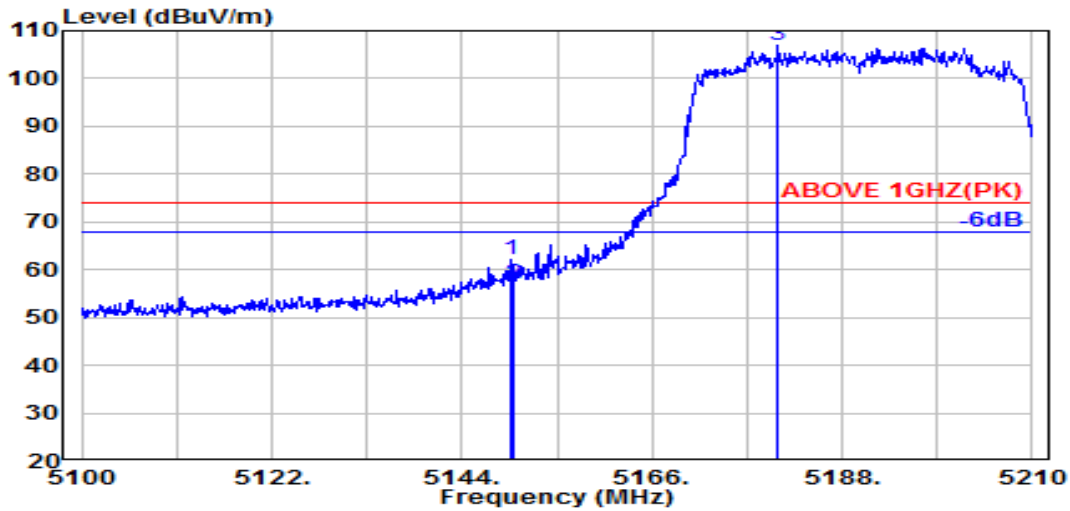

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.50	8.89	34.34	52.94	61.99	74.00	12.01	Peak
5150.000	34.50	8.89	34.34	47.94	56.98	74.00	17.02	Peak
@ 5180.520	34.62	8.90	34.33	97.61	106.81	---	---	Peak

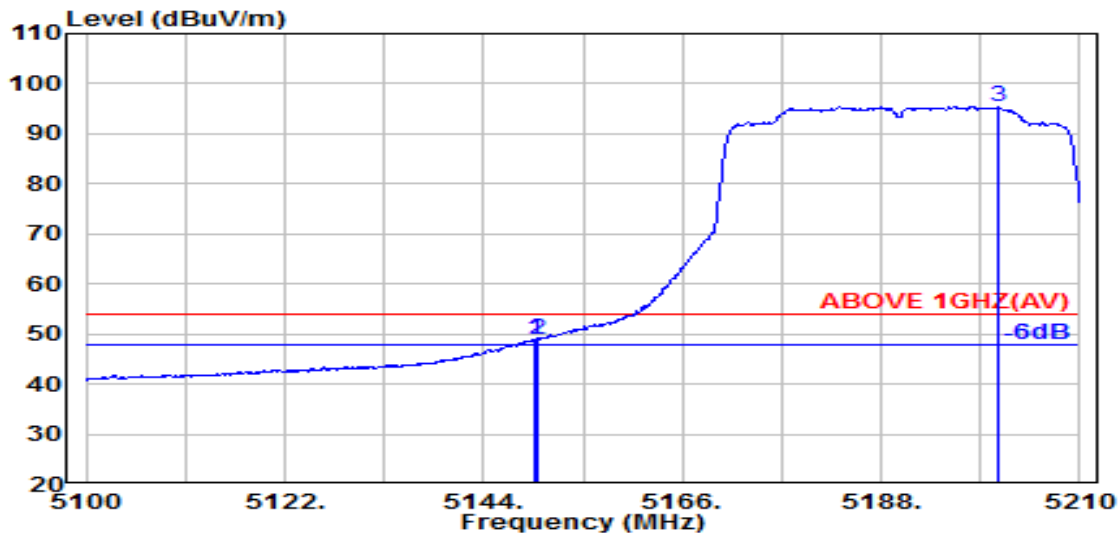


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.50	8.89	34.34	39.94	48.98	54.00	5.02	Average
5150.000	34.50	8.89	34.34	39.98	49.03	54.00	4.97	Average
@ 5200.870	34.70	8.91	34.32	86.24	95.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

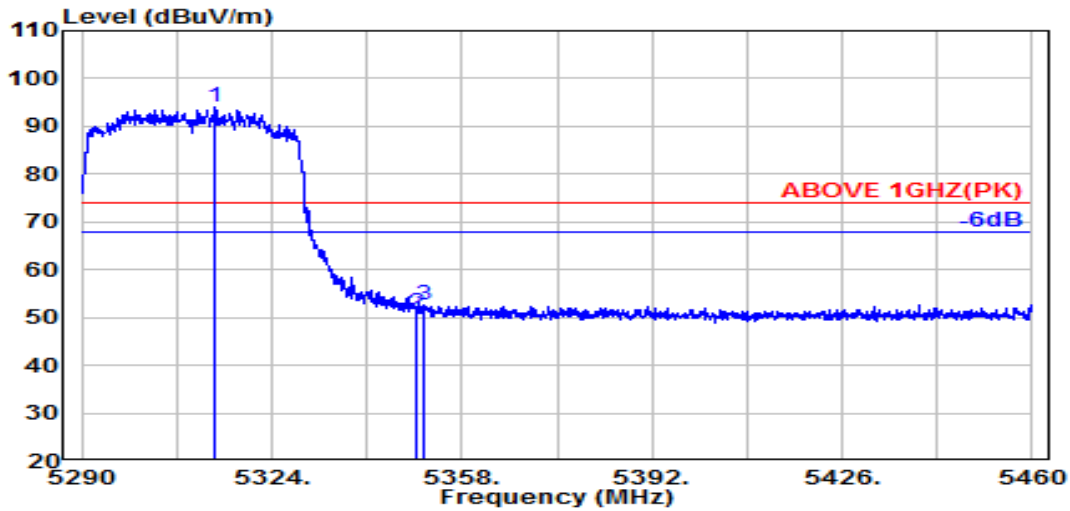

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.900	34.54	8.98	34.27	84.94	94.18	---	---	Peak
5350.000	34.90	9.00	34.26	41.34	50.98	74.00	23.02	Peak
5351.200	34.90	9.00	34.26	43.07	52.71	74.00	21.29	Peak

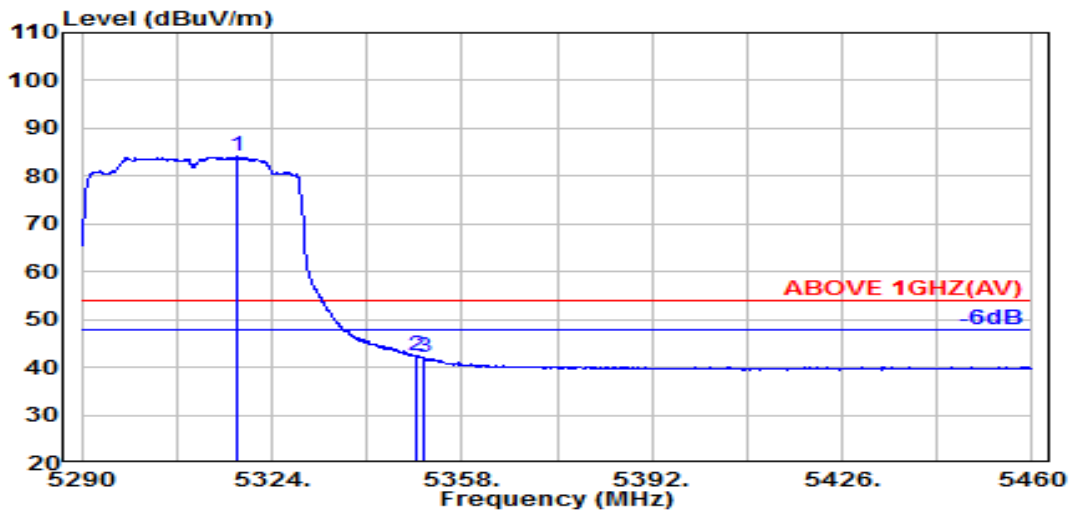


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.900	34.58	8.98	34.27	74.75	84.03	---	---	Average
5350.000	34.90	9.00	34.26	32.61	42.25	54.00	11.75	Average
5351.000	34.90	9.00	34.26	32.53	42.17	54.00	11.83	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

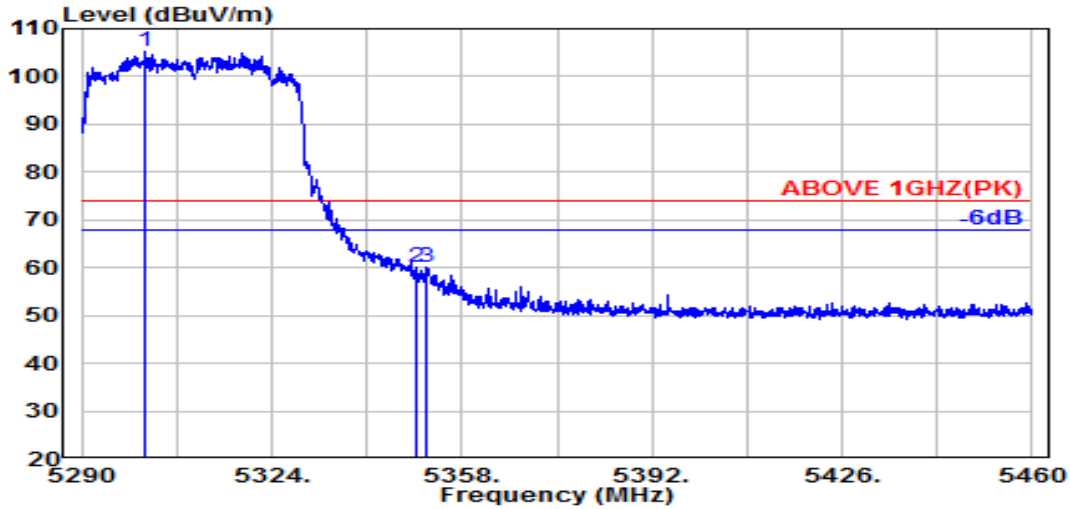

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.400	34.41	8.97	34.28	96.04	105.15	---	---	Peak
5350.000	34.90	9.00	34.26	50.29	59.92	74.00	14.08	Peak
5351.600	34.90	9.00	34.26	50.29	59.93	74.00	14.07	Peak

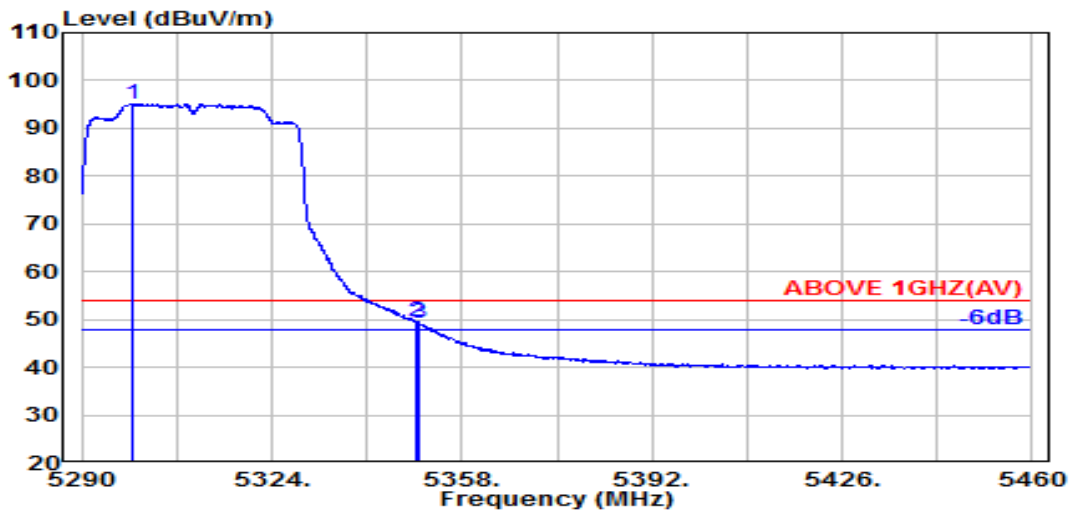


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.200	34.40	8.97	34.28	86.04	95.13	---	---	Average
5350.000	34.90	9.00	34.26	39.89	49.52	54.00	4.48	Average
5350.400	34.90	9.00	34.26	39.50	49.14	54.00	4.86	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

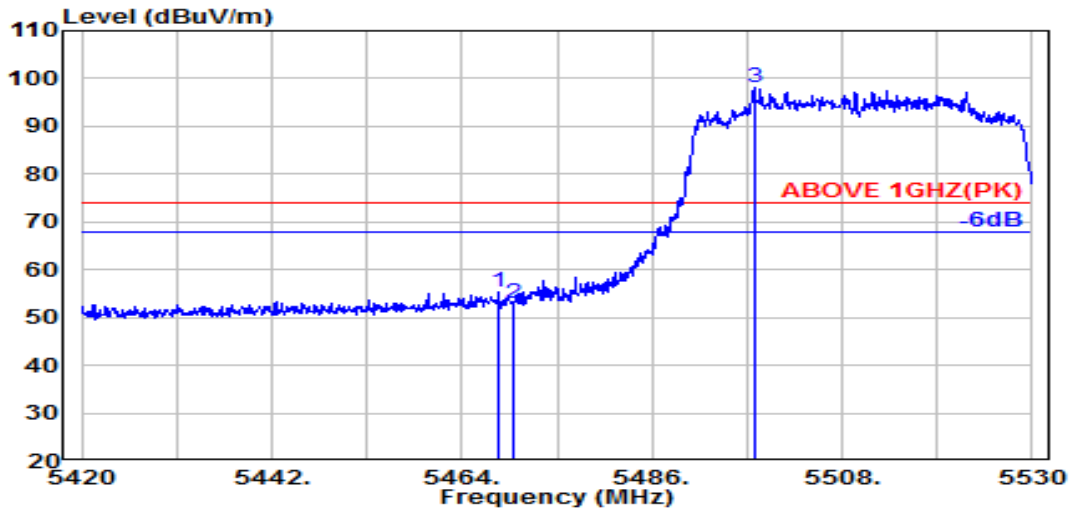

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.64	9.06	34.21	45.71	55.19	74.00	18.81	Peak
5470.000	34.64	9.06	34.21	43.47	52.96	74.00	21.04	Peak
@ 5497.800	34.70	9.08	34.20	88.42	97.99	---	---	Peak

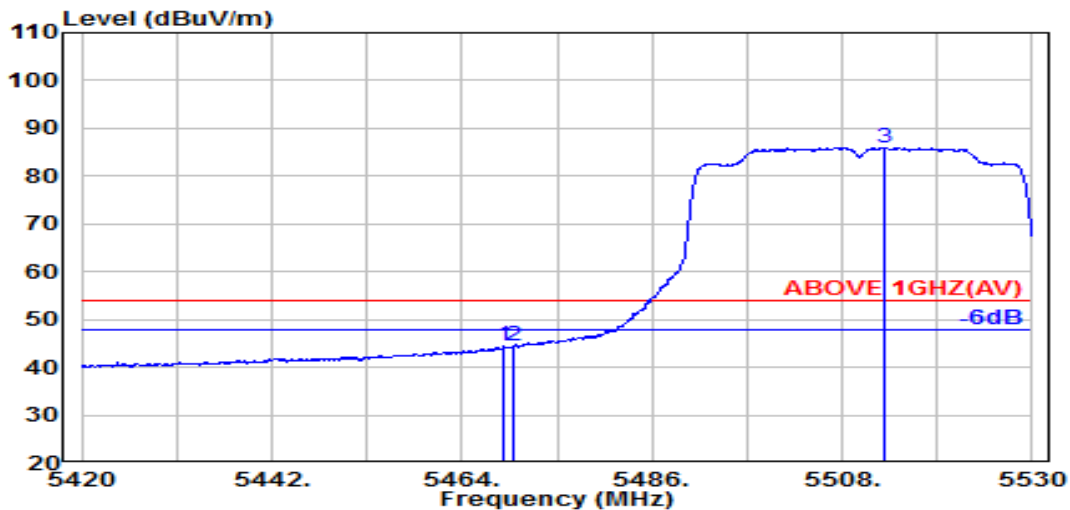


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.64	9.06	34.21	34.86	44.35	54.00	9.65	Average
5470.000	34.64	9.06	34.21	34.92	44.41	54.00	9.59	Average
@ 5512.800	34.70	9.08	34.21	76.35	85.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

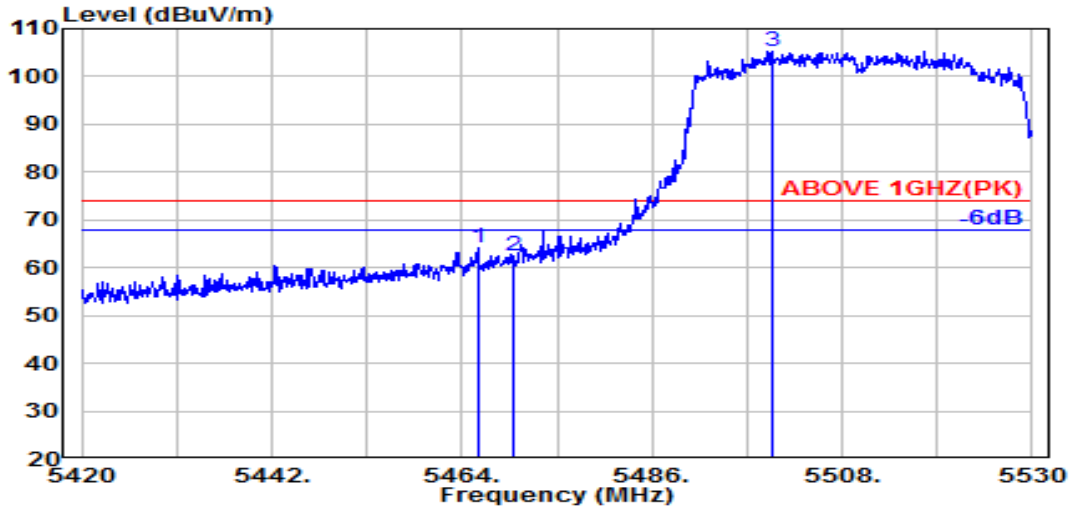

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.63	9.06	34.21	54.82	64.30	74.00	9.70	Peak
5470.000	34.64	9.06	34.21	53.01	62.50	74.00	11.50	Peak
@ 5499.800	34.70	9.08	34.20	95.79	105.37	---	---	Peak

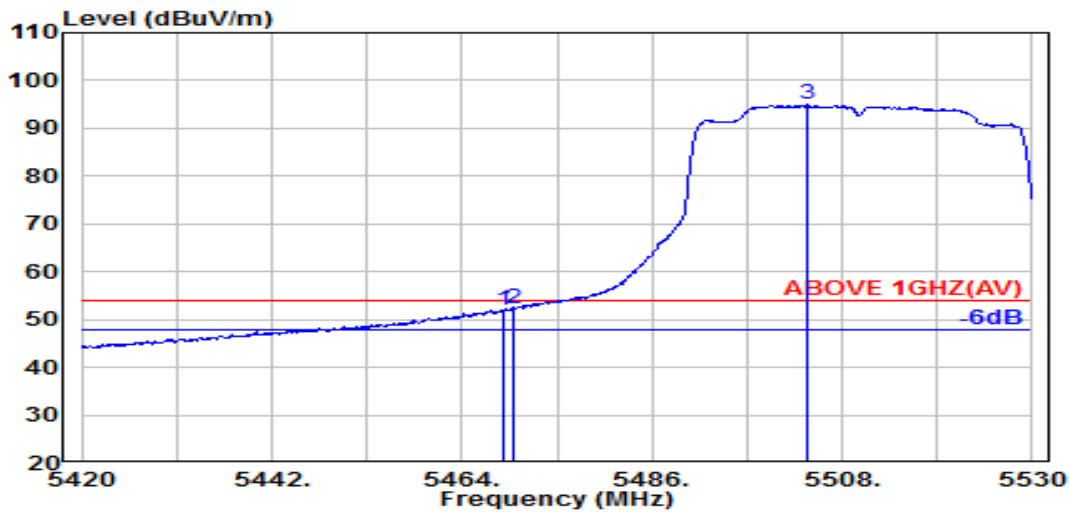


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.64	9.06	34.21	42.59	52.07	54.00	1.93	Average
5470.000	34.64	9.06	34.21	42.90	52.39	54.00	1.61	Average
@ 5504.100	34.70	9.08	34.20	85.31	94.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

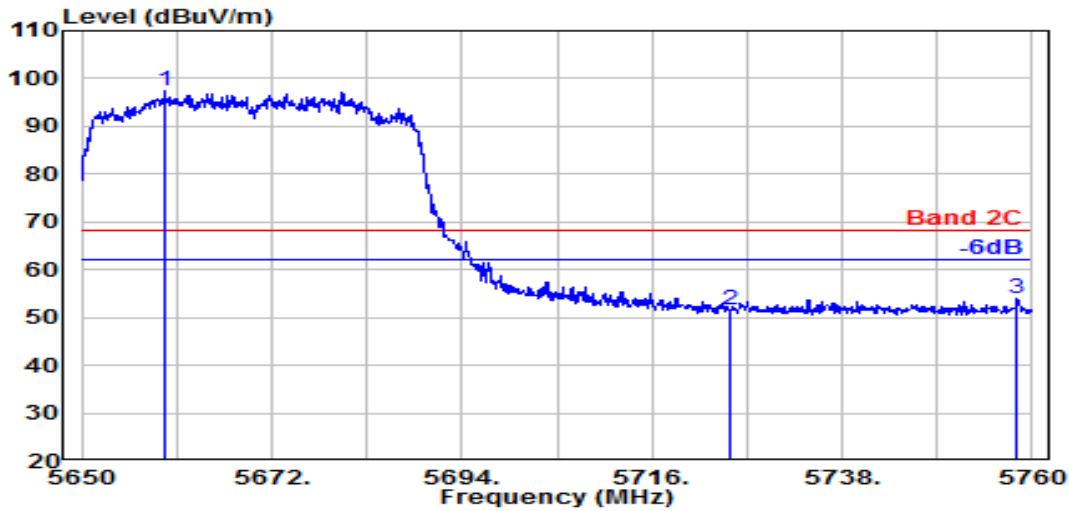

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.600	34.54	9.16	34.28	88.11	97.53	---	---	Peak
5725.000	34.85	9.19	34.31	41.96	51.70	68.20	16.50	Peak
5758.200	35.02	9.21	34.32	44.07	53.98	68.20	14.22	Peak

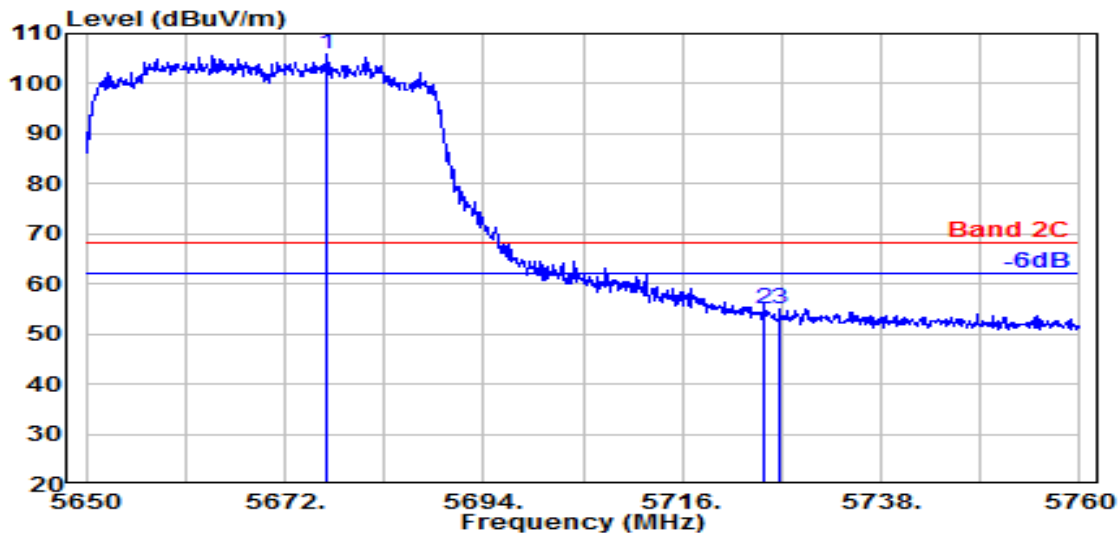


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.700	34.61	9.17	34.28	96.38	105.88	---	---	Peak
5725.000	34.85	9.19	34.31	45.32	55.06	68.20	13.14	Peak
5726.900	34.86	9.19	34.31	45.37	55.12	68.20	13.08	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

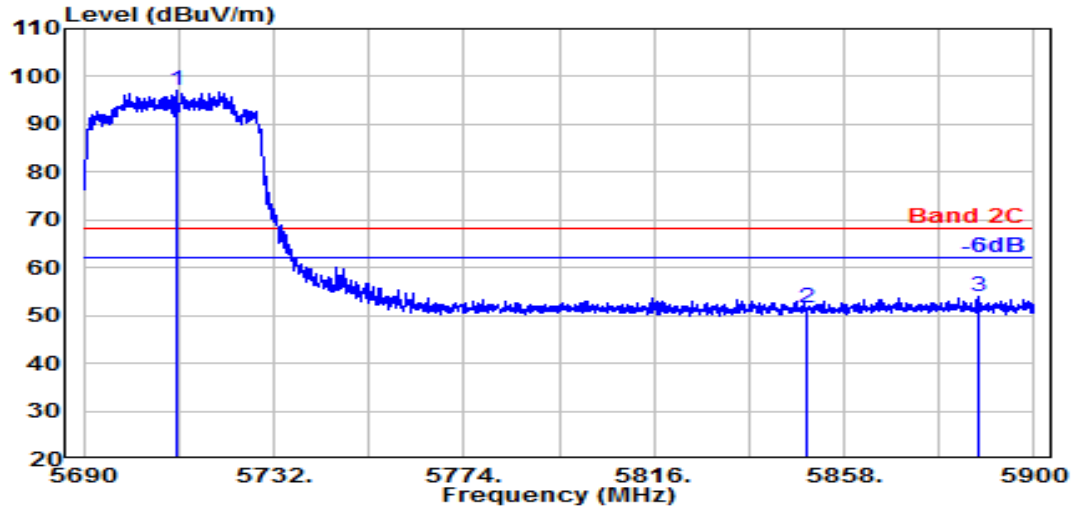

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5710.500	34.76	9.19	34.30	87.59	97.24	---	---	Peak
5850.000	35.40	9.26	34.36	41.46	51.75	68.20	16.45	Peak
5887.500	35.70	9.27	34.38	43.44	54.03	68.20	14.17	Peak

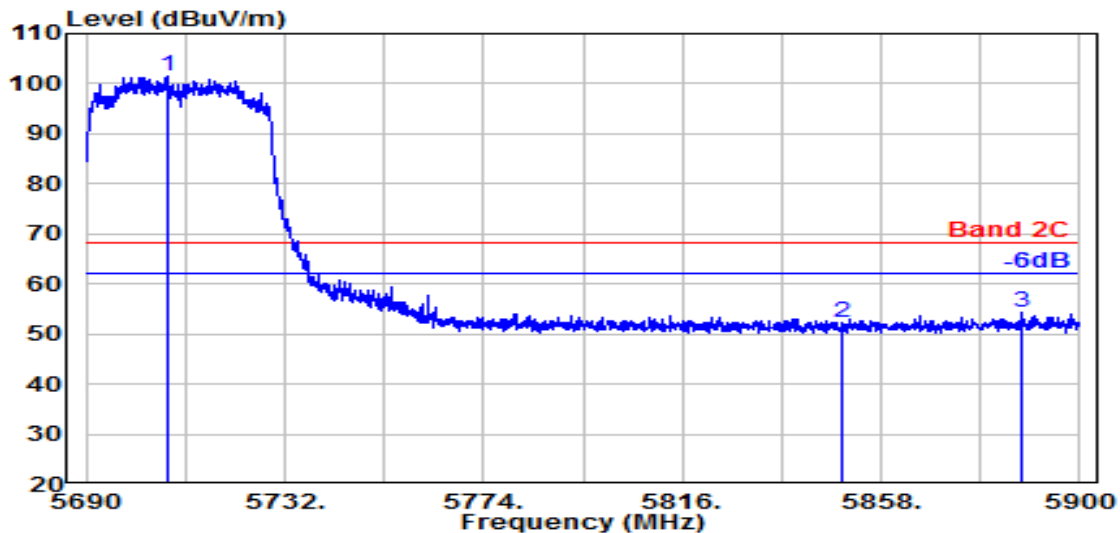


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.200	34.74	9.18	34.30	91.88	101.51	---	---	Peak
5850.000	35.40	9.26	34.36	41.96	52.25	68.20	15.95	Peak
5887.600	35.70	9.28	34.38	43.67	54.26	68.20	13.94	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

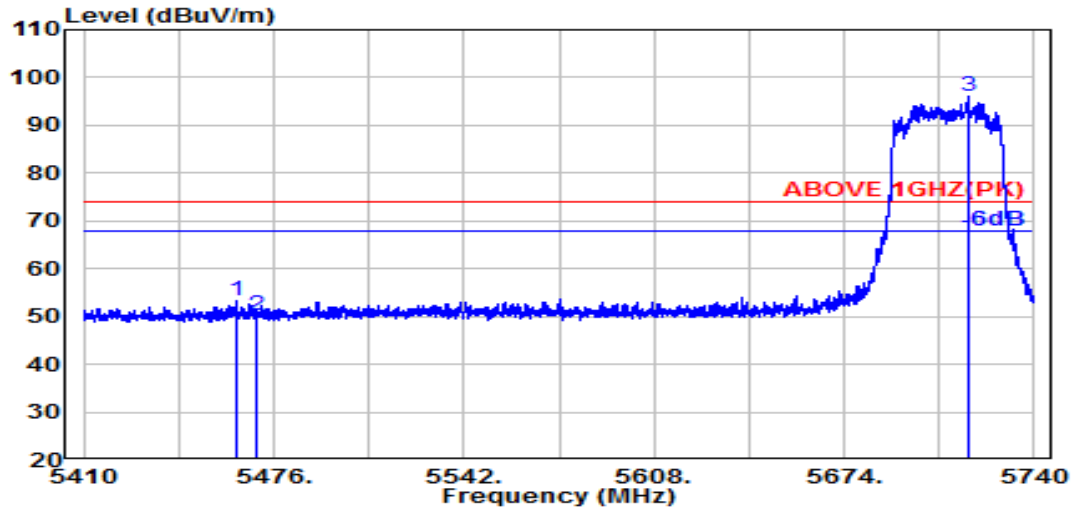

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.63	9.06	34.21	43.85	53.32	74.00	20.68	Peak
5470.000	34.64	9.06	34.21	40.61	50.10	74.00	23.90	Peak
@ 5716.900	34.80	9.19	34.30	86.54	96.23	---	---	Peak

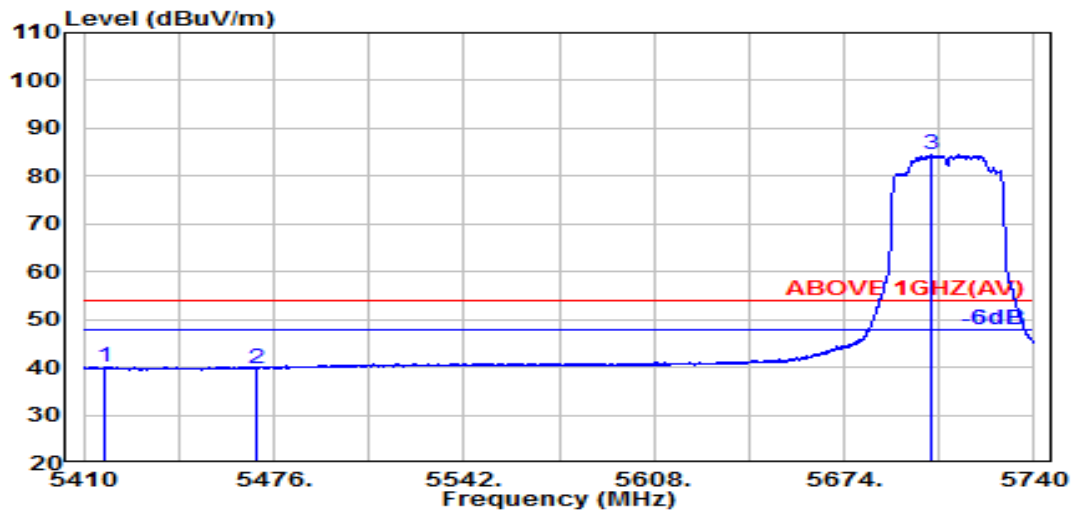


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.000	34.73	9.03	34.23	30.58	40.11	74.00	33.89	Peak
5470.000	34.64	9.06	34.21	30.31	39.80	74.00	34.20	Peak
@ 5704.600	34.73	9.18	34.30	74.86	84.47	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

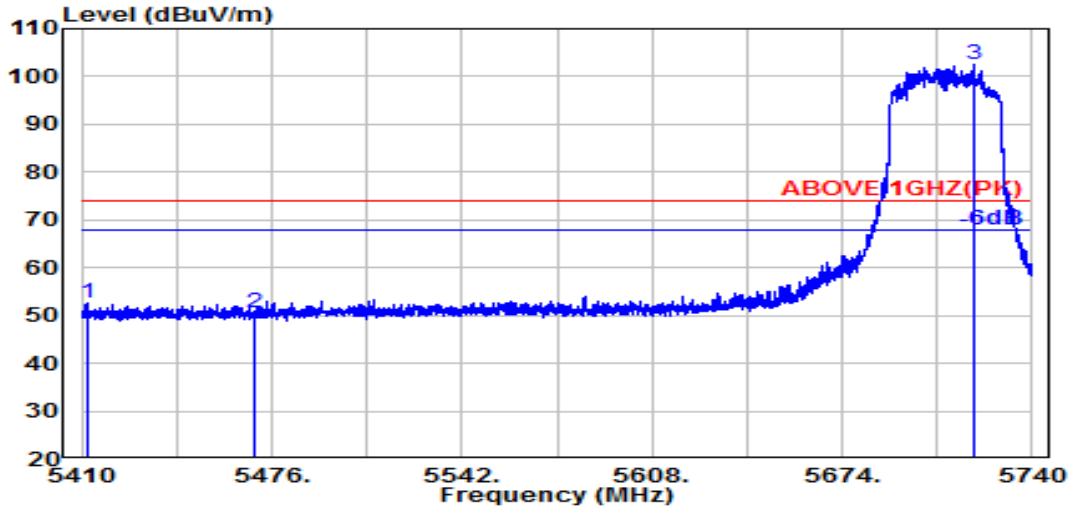

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.300	34.75	9.03	34.23	42.95	52.50	74.00	21.50	Peak
5470.000	34.64	9.06	34.21	41.10	50.59	74.00	23.41	Peak
@ 5719.900	34.82	9.19	34.30	92.98	102.68	---	---	Peak

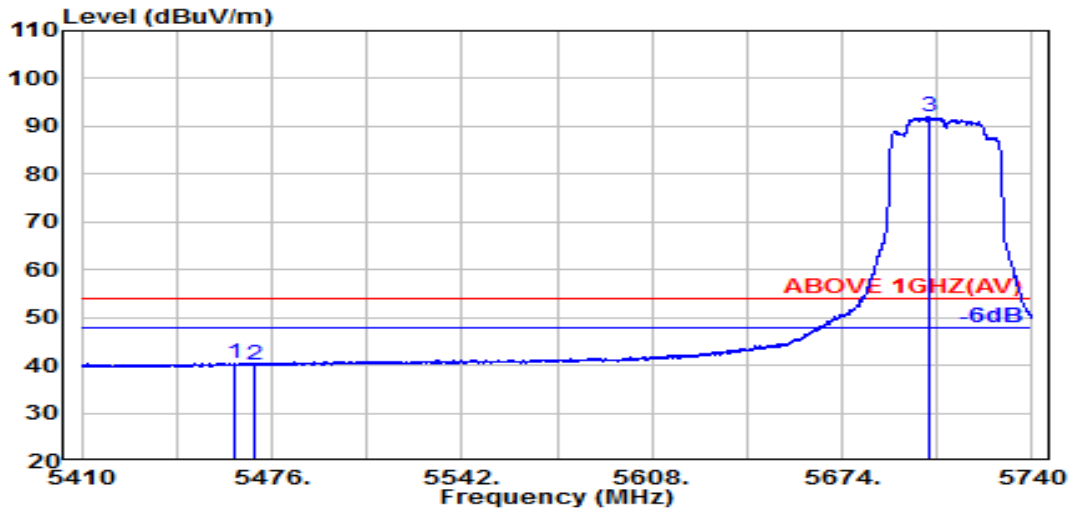


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.63	9.06	34.21	31.03	40.50	74.00	33.50	Peak
5470.000	34.64	9.06	34.21	30.61	40.10	74.00	33.90	Peak
@ 5703.900	34.72	9.18	34.30	82.41	92.02	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

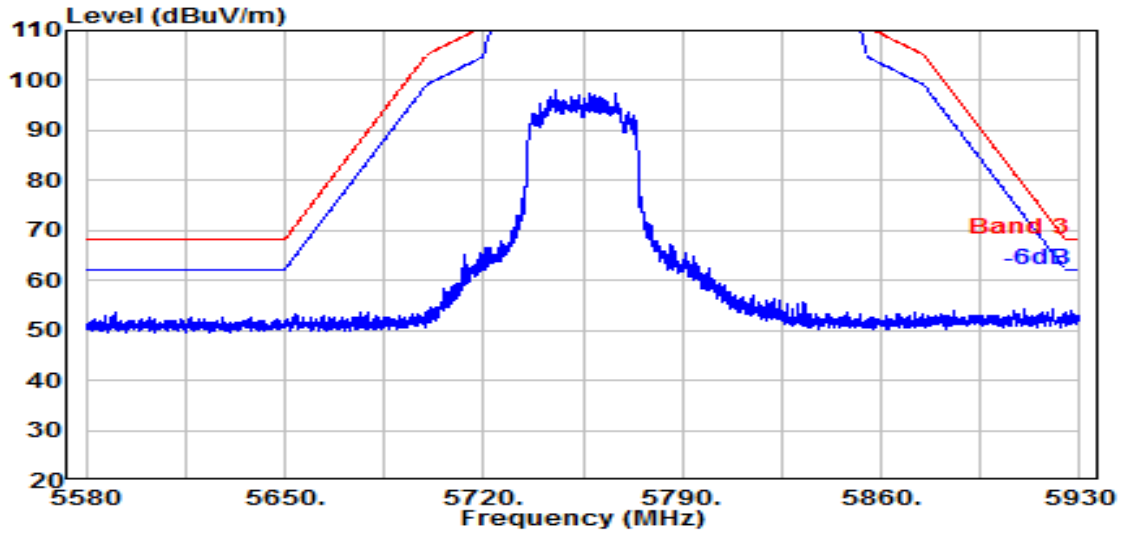


Antenna at Vertical Polarization

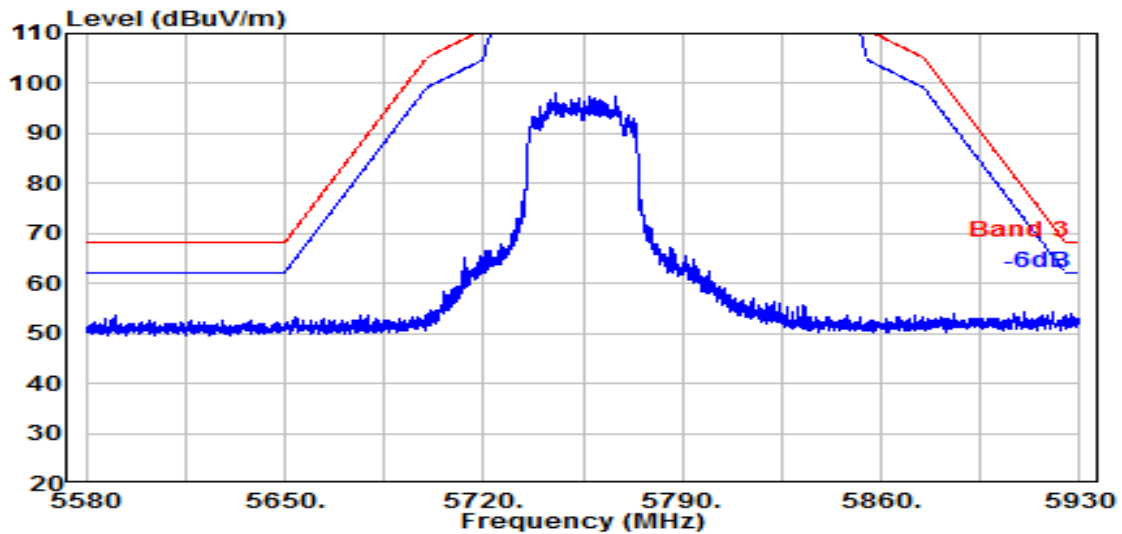


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

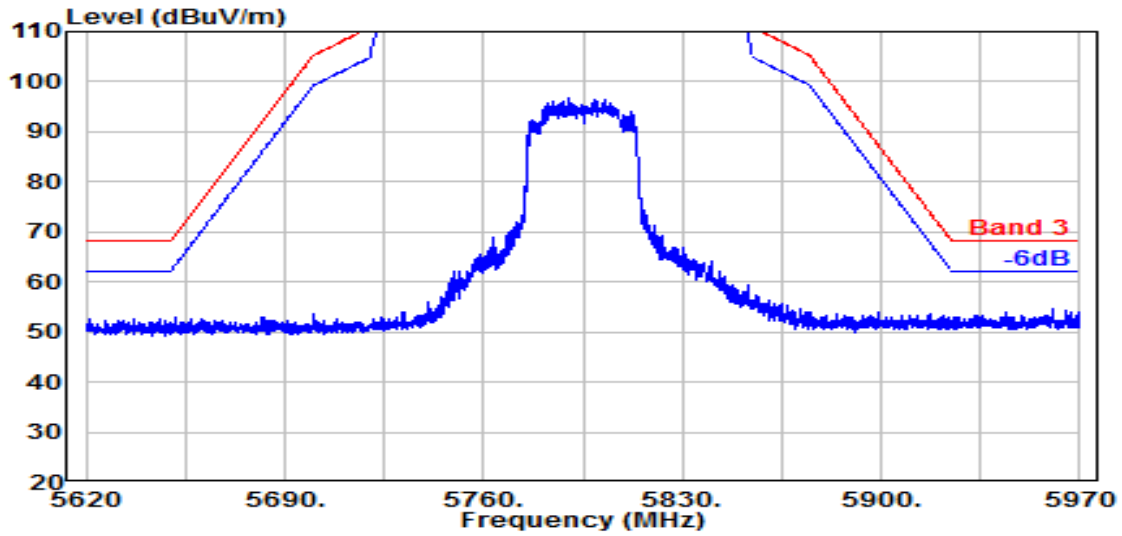

Antenna at Vertical Polarization

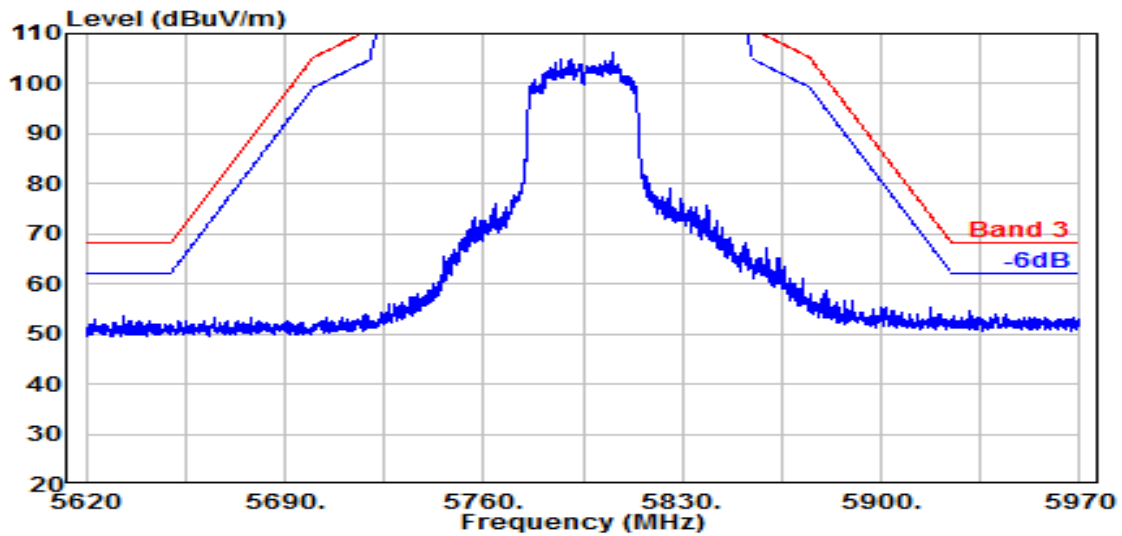


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

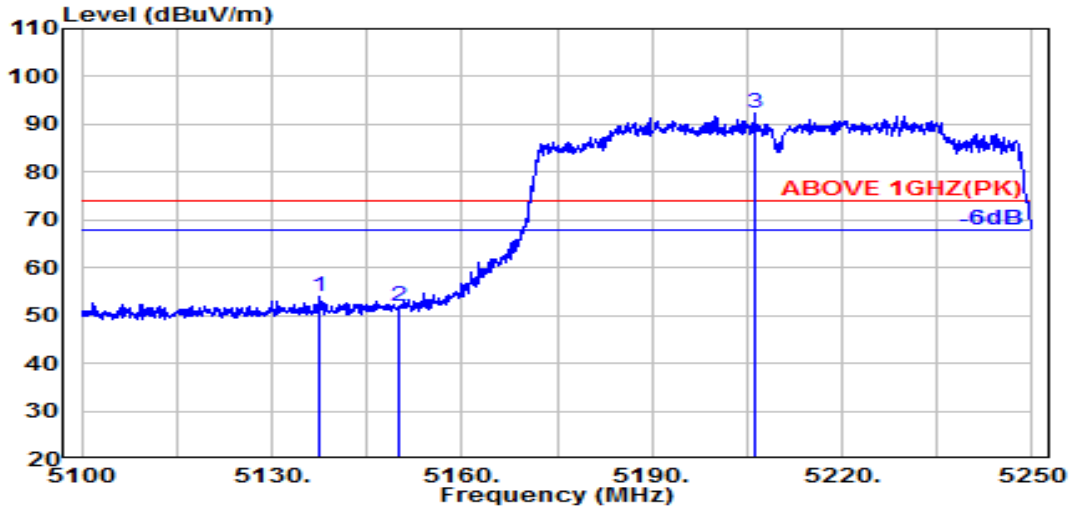

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.500	34.43	8.88	34.34	44.91	53.87	74.00	20.13	Peak
5150.000	34.50	8.89	34.34	42.94	51.99	74.00	22.01	Peak
@ 5206.300	34.67	8.92	34.32	82.95	92.23	---	---	Peak

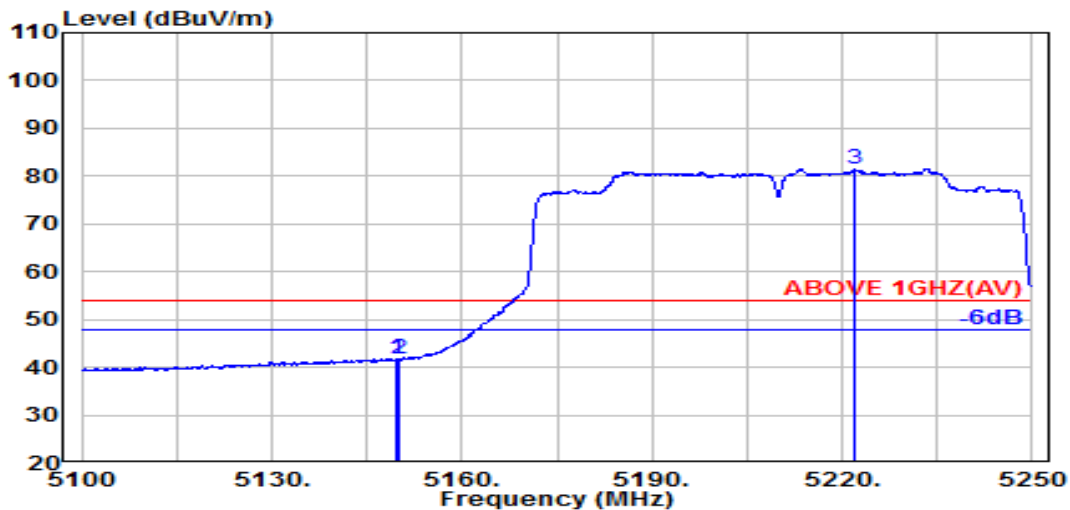


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.89	34.34	32.69	41.73	54.00	12.27	Average
5150.000	34.50	8.89	34.34	32.56	41.61	54.00	12.39	Average
@ 5222.000	34.61	8.93	34.31	72.32	81.55	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

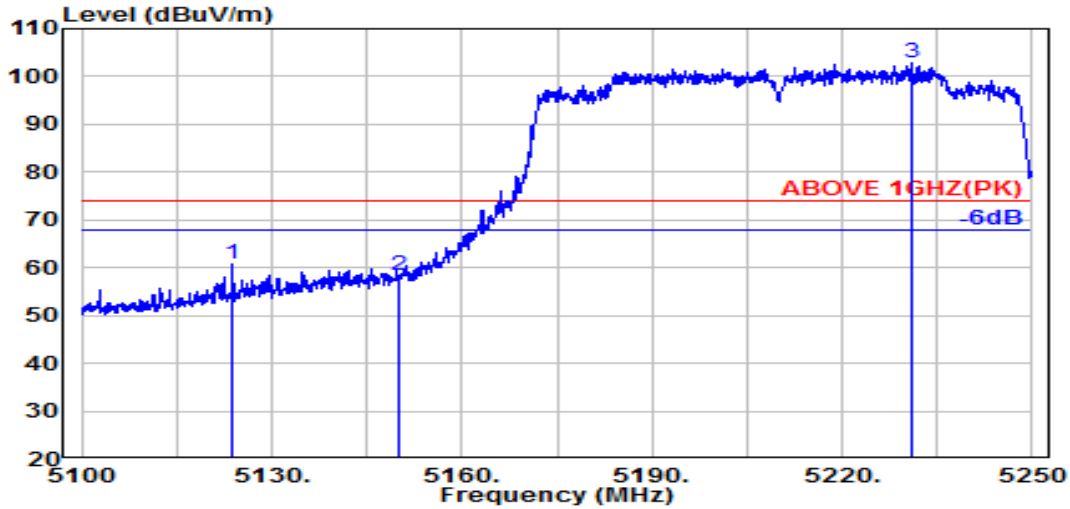

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.800	34.34	8.87	34.35	51.74	60.61	74.00	13.39	Peak
5150.000	34.50	8.89	34.34	49.32	58.37	74.00	15.63	Peak
@ 5231.000	34.58	8.93	34.31	93.56	102.76	---	---	Peak

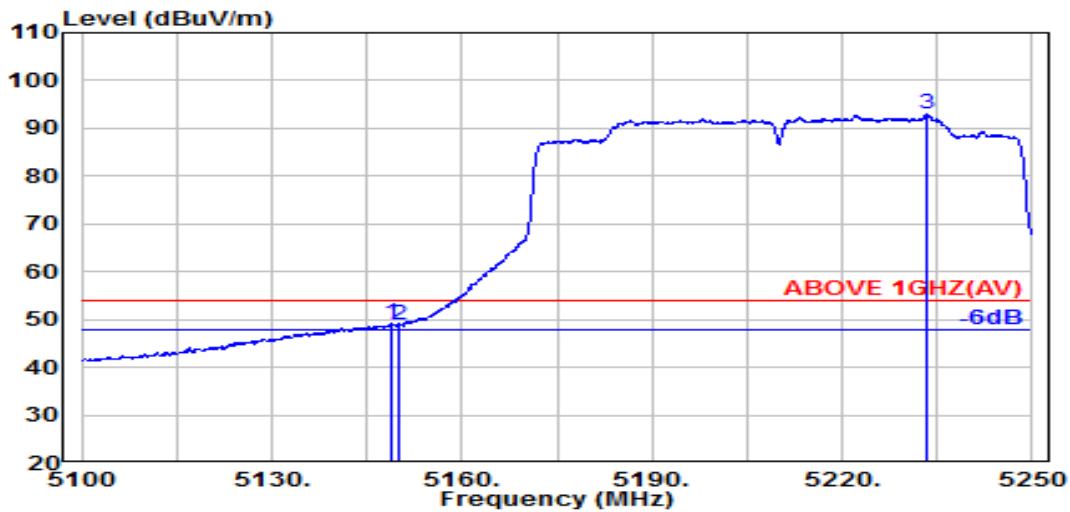


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.49	8.89	34.34	40.03	49.07	54.00	4.93	Average
5150.000	34.50	8.89	34.34	39.90	48.95	54.00	5.05	Average
@ 5233.500	34.57	8.93	34.30	83.70	92.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

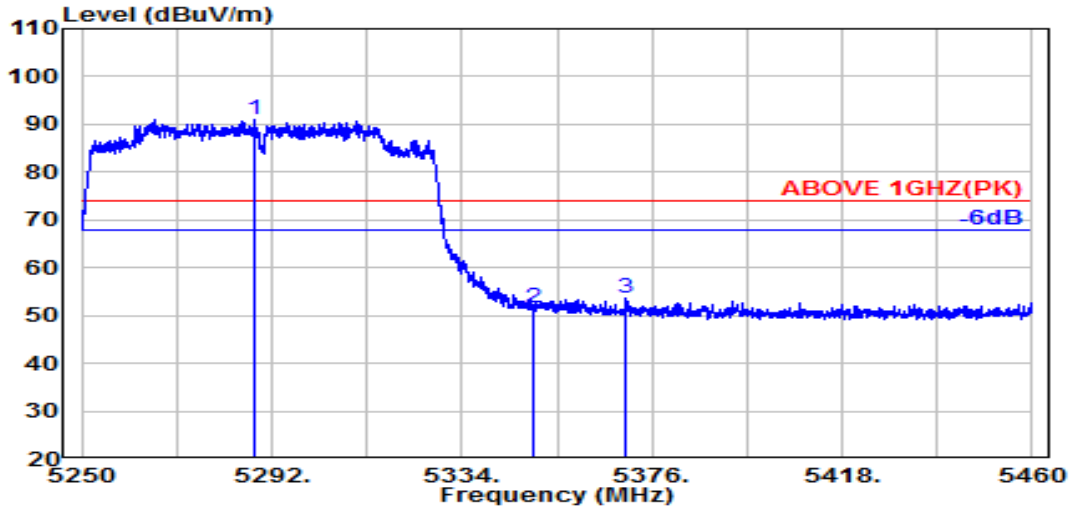

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5288.100	34.42	8.96	34.28	81.99	91.10	---	---	Peak
5350.000	34.90	9.00	34.26	41.89	51.53	74.00	22.47	Peak
5370.400	34.86	9.01	34.25	43.95	53.57	74.00	20.43	Peak

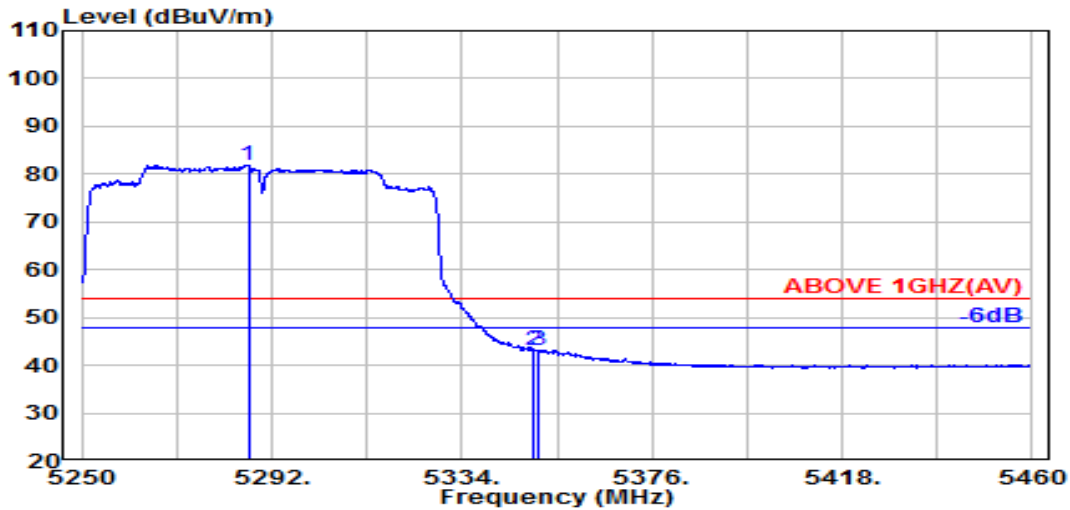


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.800	34.43	8.96	34.28	72.78	81.88	---	---	Average
5350.000	34.90	9.00	34.26	33.50	43.14	54.00	10.86	Average
5351.100	34.90	9.00	34.26	33.62	43.26	54.00	10.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

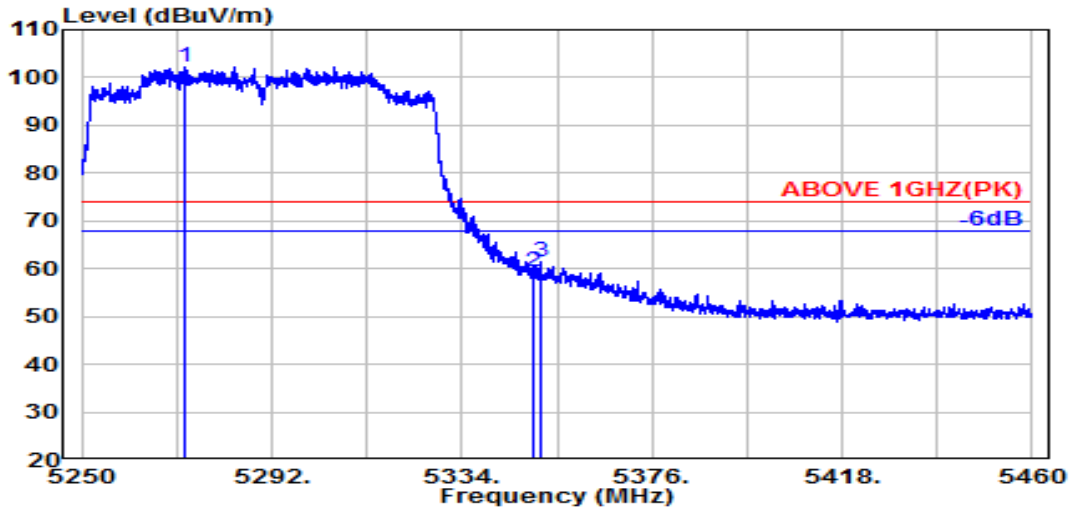

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.900	34.45	8.95	34.29	93.15	102.27	---	---	Peak
5350.000	34.90	9.00	34.26	49.61	59.25	74.00	14.75	Peak
5351.300	34.90	9.00	34.26	51.88	61.51	74.00	12.49	Peak

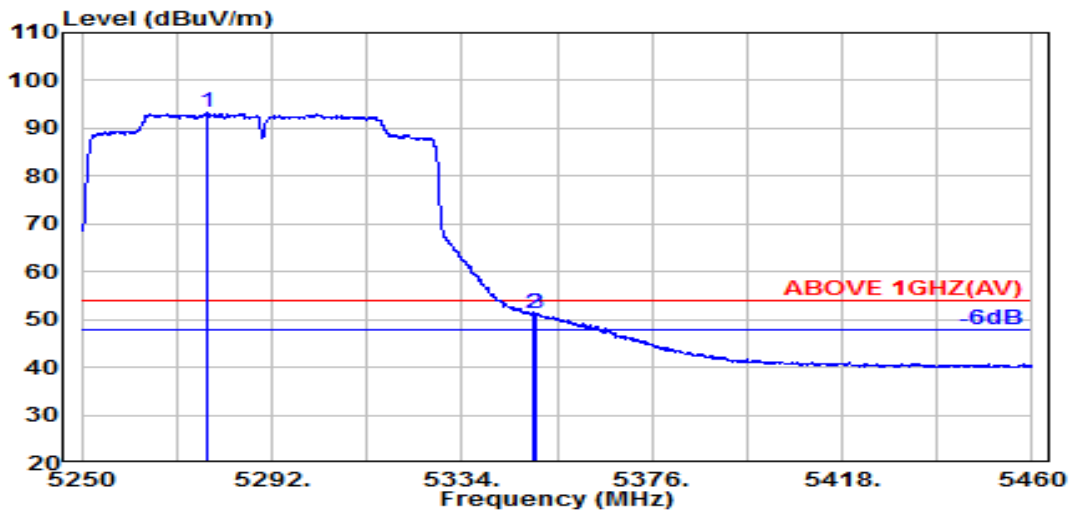


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.800	34.44	8.96	34.29	84.10	93.22	---	---	Average
5350.000	34.90	9.00	34.26	41.77	51.41	54.00	2.59	Average
5350.400	34.90	9.00	34.26	41.49	51.13	54.00	2.87	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

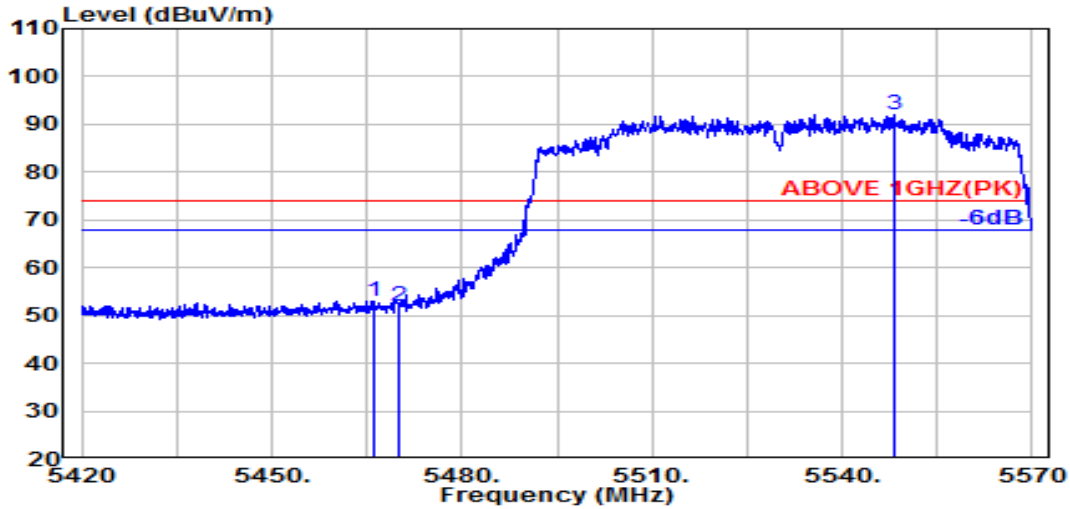

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.63	9.06	34.21	43.56	53.04	74.00	20.96	Peak
5470.000	34.64	9.06	34.21	42.48	51.97	74.00	22.03	Peak
@ 5548.300	34.70	9.10	34.22	82.34	91.92	---	---	Peak

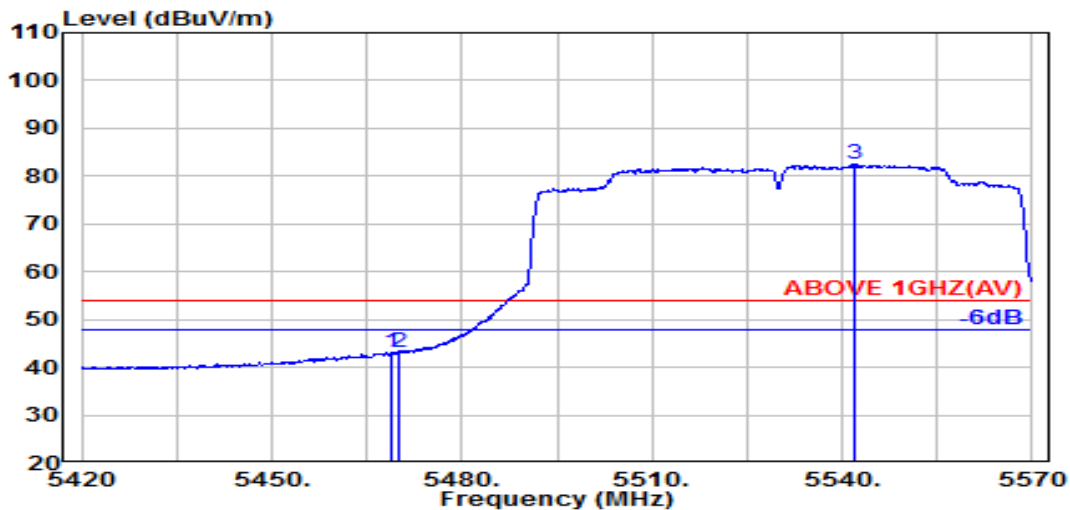


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.64	9.06	34.21	33.59	43.08	54.00	10.92	Average
5470.000	34.64	9.06	34.21	33.64	43.13	54.00	10.87	Average
@ 5541.900	34.70	9.10	34.22	72.98	82.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

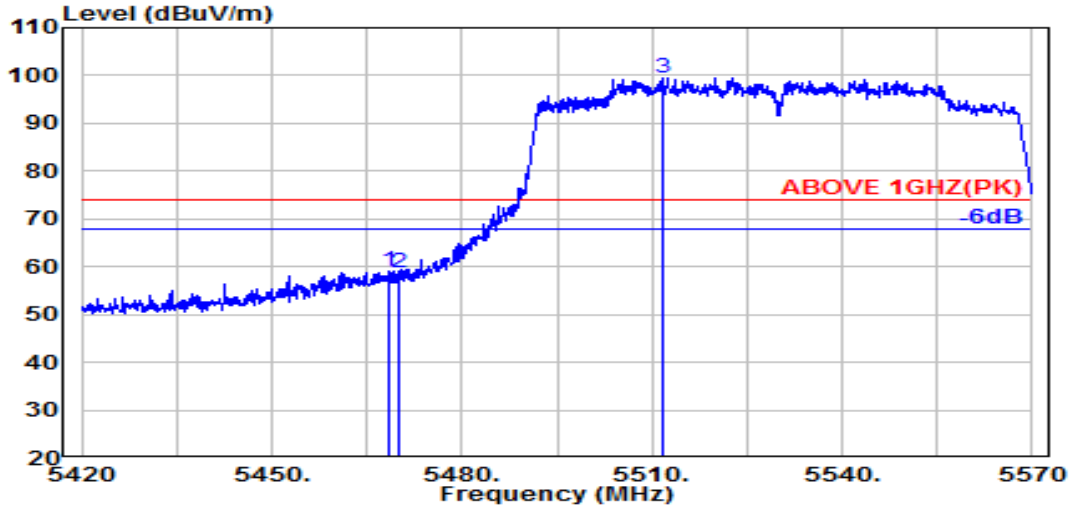

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.64	9.06	34.21	49.46	58.95	74.00	15.05	Peak
5470.000	34.64	9.06	34.21	49.10	58.59	74.00	15.41	Peak
@ 5511.700	34.70	9.08	34.21	89.99	99.57	---	---	Peak

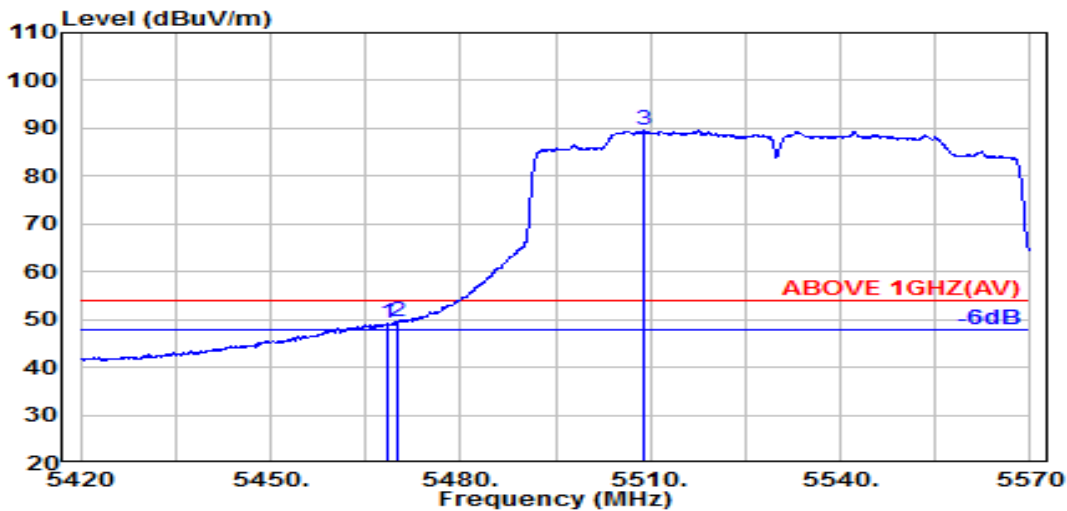


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.64	9.06	34.21	39.68	49.17	54.00	4.83	Average
5470.000	34.64	9.06	34.21	40.20	49.69	54.00	4.31	Average
@ 5509.000	34.70	9.08	34.20	79.96	89.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

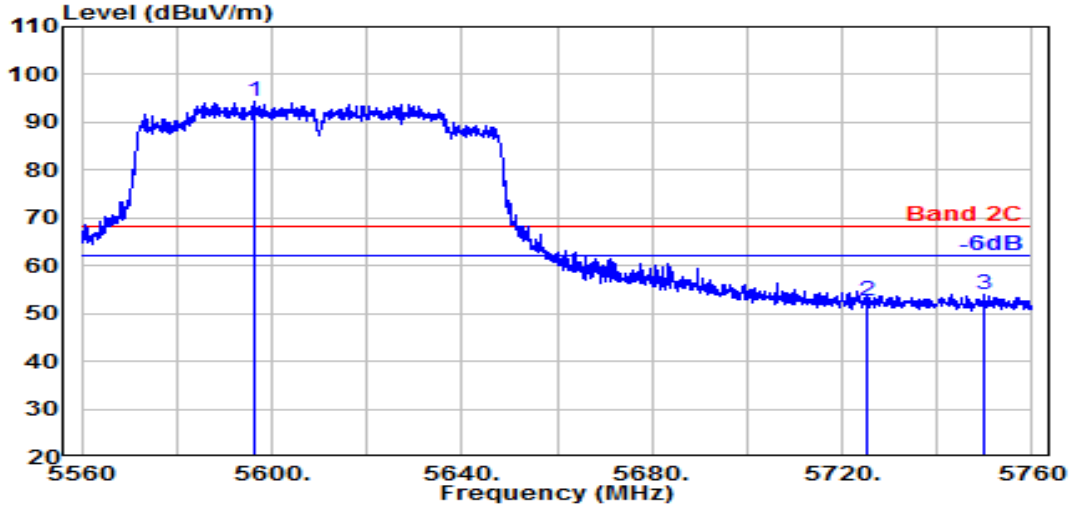

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5596.300	34.42	9.13	34.25	85.01	94.31	---	---	Peak
5725.000	34.85	9.19	34.31	42.90	52.64	68.20	15.56	Peak
5750.100	35.00	9.21	34.32	43.99	53.88	68.20	14.32	Peak

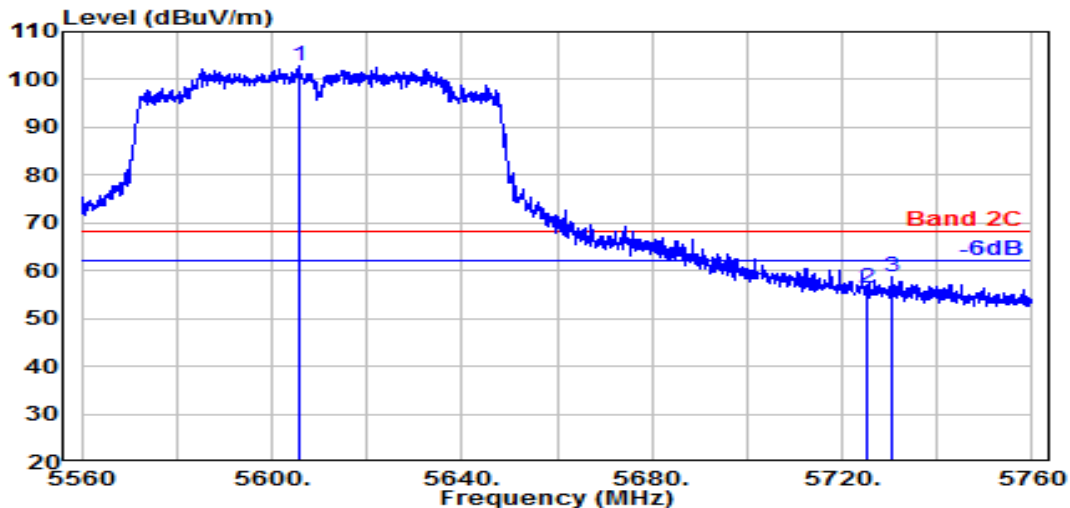


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.900	34.41	9.13	34.25	93.64	102.93	---	---	Peak
5725.000	34.85	9.19	34.31	46.45	56.19	68.20	12.01	Peak
5730.700	34.88	9.20	34.31	48.86	58.63	68.20	9.57	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

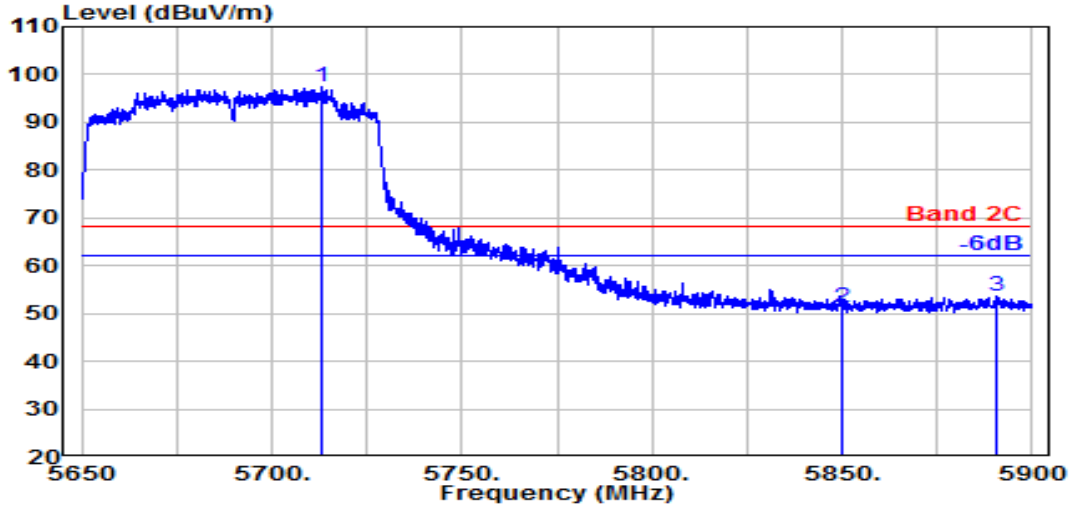

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.100	34.78	9.19	34.30	87.80	97.47	---	---	Peak
5850.000	35.40	9.26	34.36	41.05	51.34	68.20	16.86	Peak
5890.400	35.72	9.28	34.38	43.07	53.69	68.20	14.51	Peak

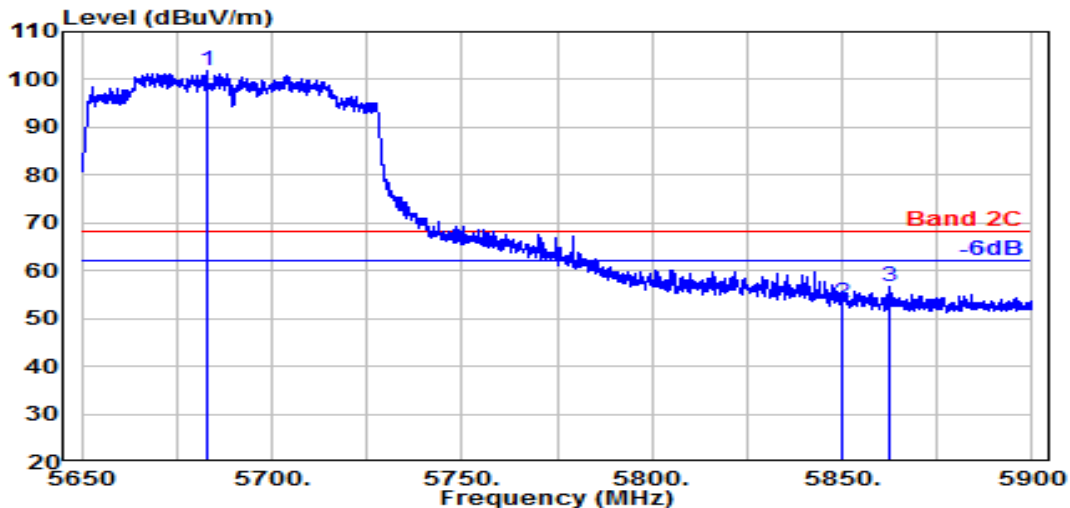


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.800	34.63	9.17	34.29	92.38	101.89	---	---	Peak
5850.000	35.40	9.26	34.36	42.98	53.27	68.20	14.93	Peak
5862.600	35.50	9.26	34.37	46.22	56.62	68.20	11.58	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

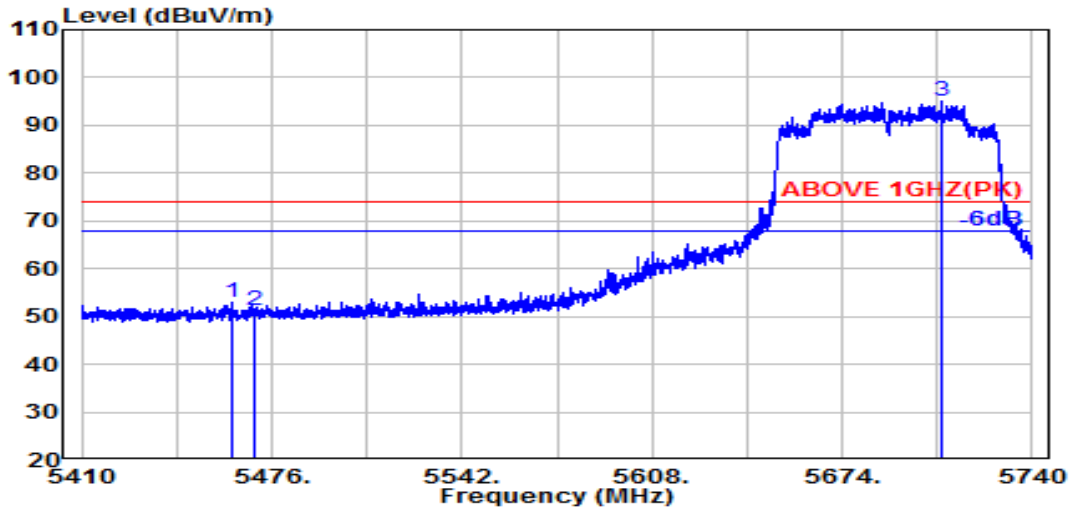

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.62	9.06	34.21	43.36	52.83	74.00	21.17	Peak
5470.000	34.64	9.06	34.21	41.84	51.33	74.00	22.67	Peak
@ 5708.500	34.75	9.19	34.30	85.31	94.95	---	---	Peak

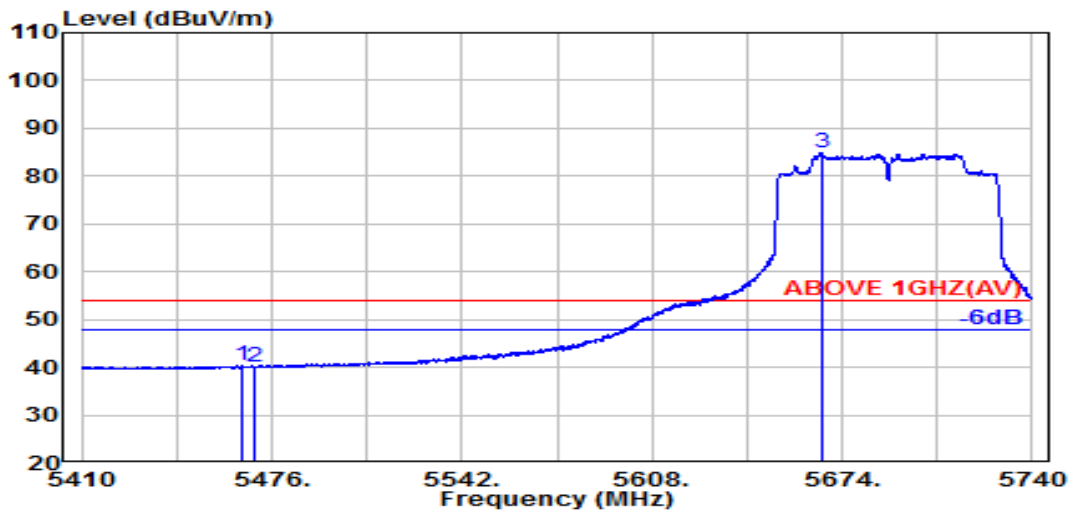


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.63	9.06	34.21	30.77	40.25	74.00	33.75	Peak
5470.000	34.64	9.06	34.21	30.57	40.06	74.00	33.94	Peak
@ 5666.700	34.57	9.16	34.28	75.36	84.81	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

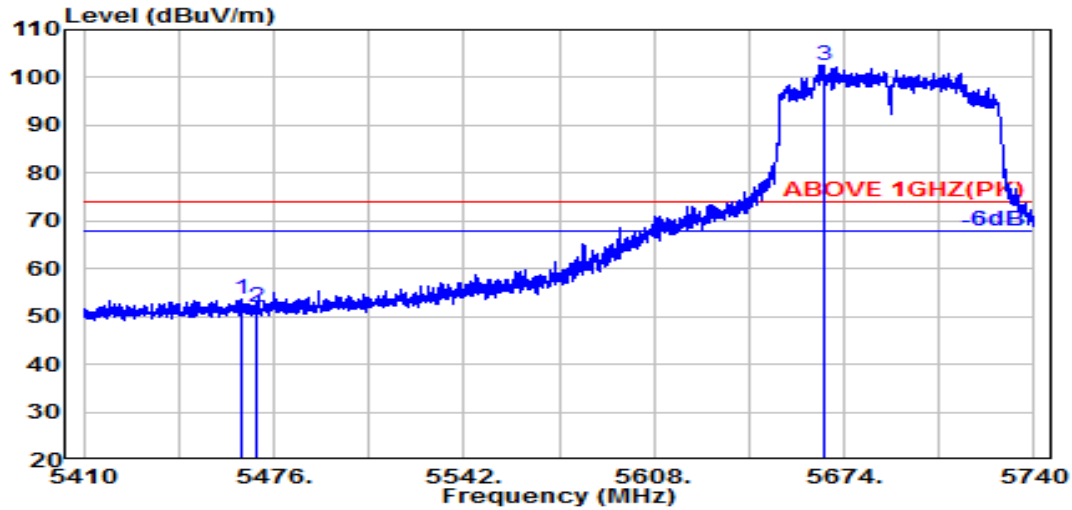

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.63	9.06	34.21	43.99	53.47	74.00	20.53	Peak
5470.000	34.64	9.06	34.21	42.56	52.05	74.00	21.95	Peak
@ 5666.700	34.57	9.16	34.28	93.06	102.51	---	---	Peak

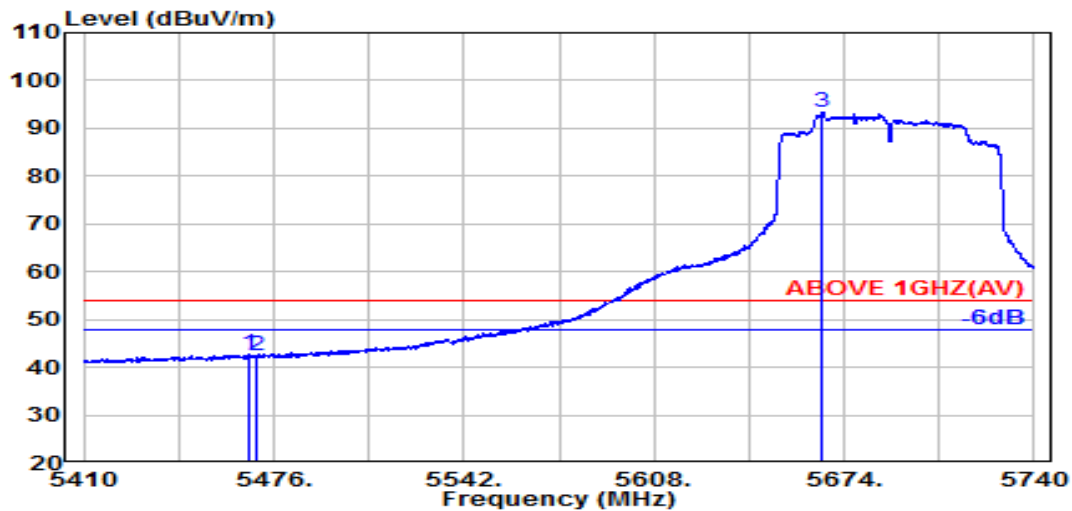


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.64	9.06	34.21	33.12	42.60	54.00	11.40	Average
5470.000	34.64	9.06	34.21	32.87	42.36	54.00	11.64	Average
@ 5666.600	34.57	9.16	34.28	83.82	93.27	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

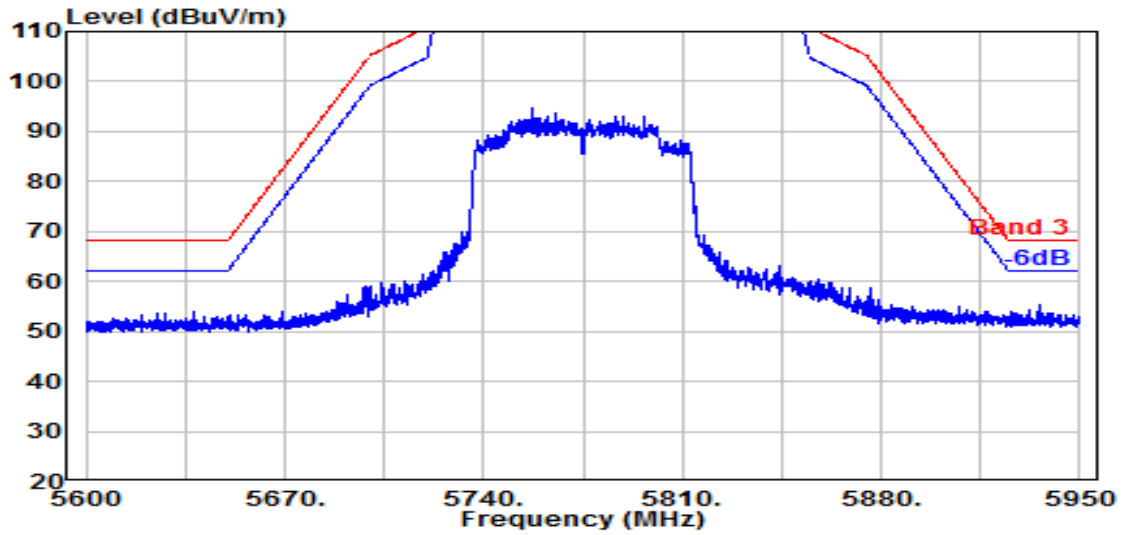

Antenna at Vertical Polarization

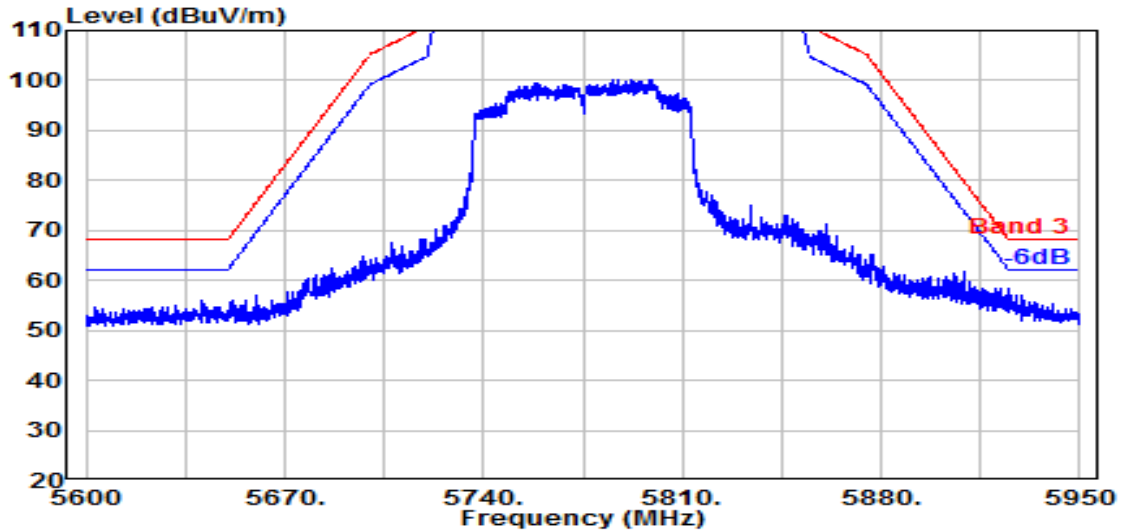


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

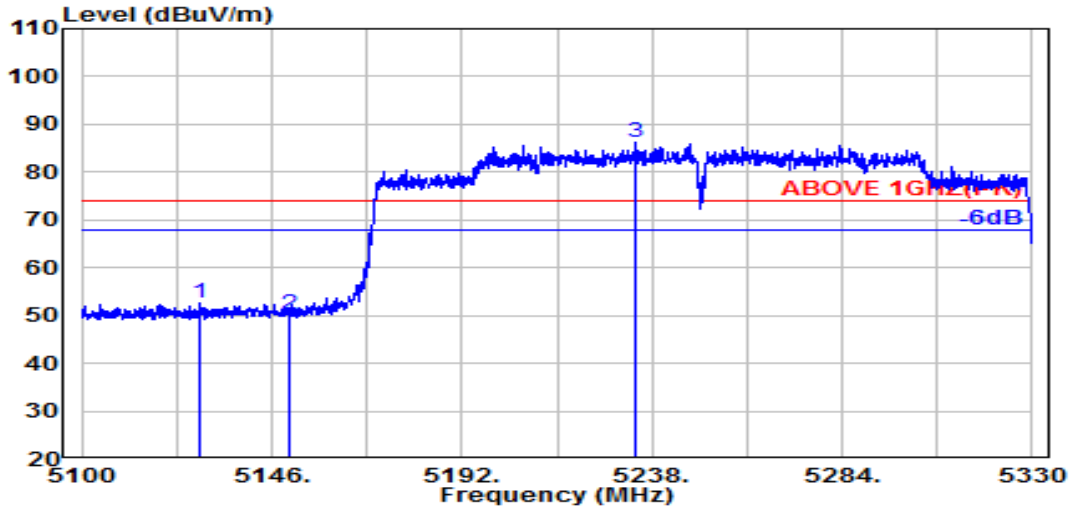

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.800	34.37	8.87	34.35	43.64	52.54	74.00	21.46	Peak
5150.000	34.50	8.89	34.34	41.23	50.28	74.00	23.72	Peak
@ 5233.800	34.56	8.93	34.30	76.91	86.10	---	---	Peak

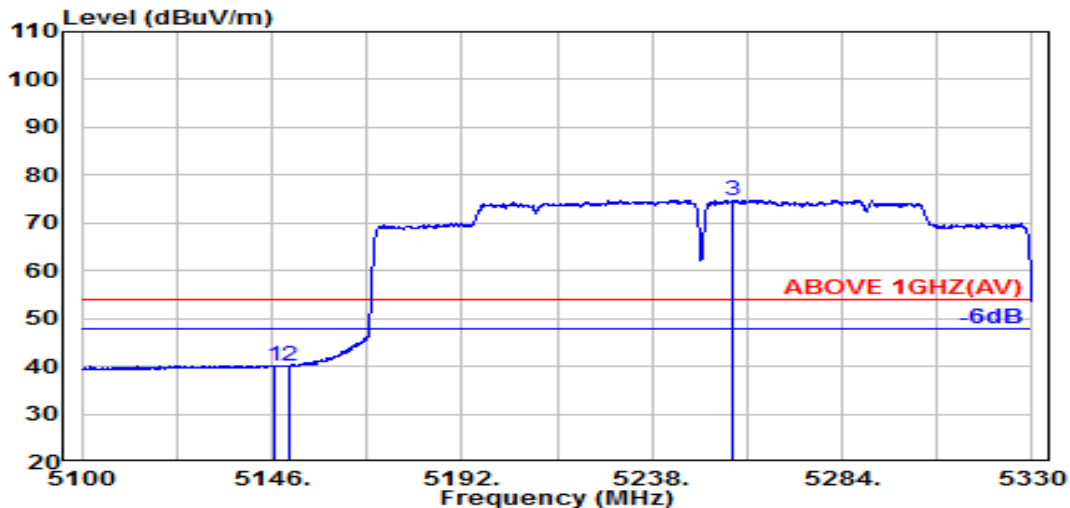


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	34.48	8.88	34.34	31.18	40.20	54.00	13.80	Average
5150.000	34.50	8.89	34.34	30.96	40.01	54.00	13.99	Average
@ 5257.300	34.49	8.95	34.29	65.65	74.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

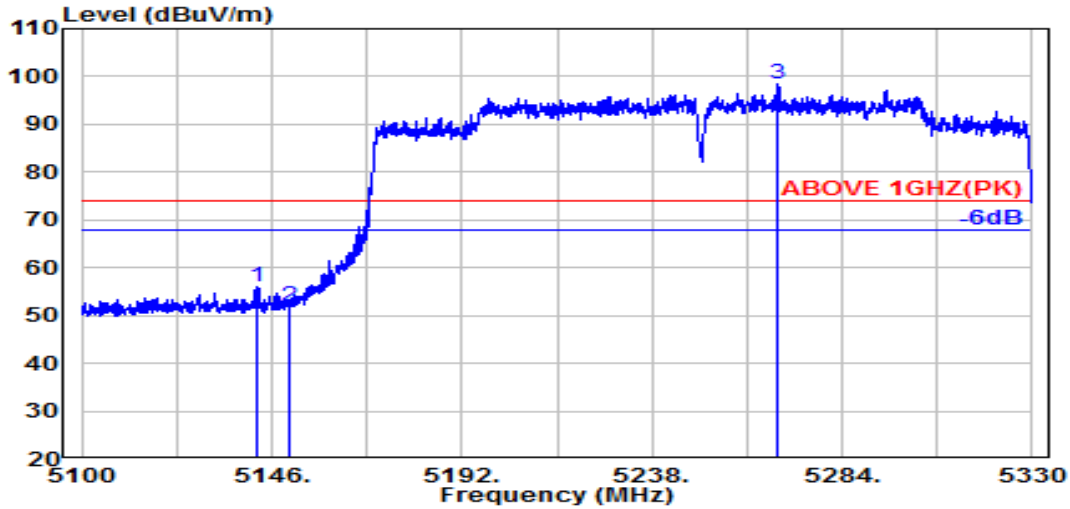

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.600	34.46	8.88	34.34	46.87	55.87	74.00	18.13	Peak
5150.000	34.50	8.89	34.34	42.72	51.77	74.00	22.23	Peak
@ 5268.600	34.46	8.95	34.29	89.33	98.45	---	---	Peak

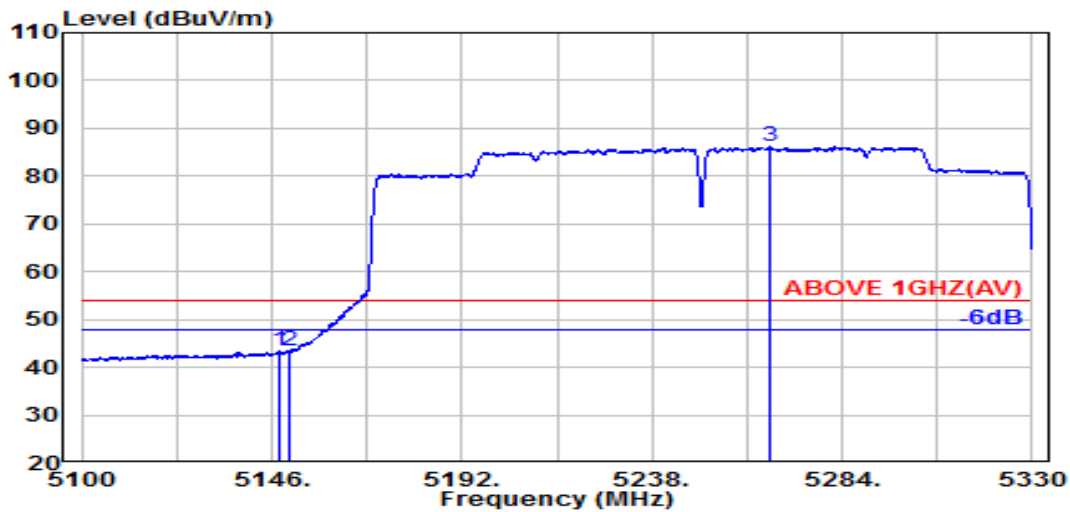


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	34.49	8.88	34.34	34.33	43.36	54.00	10.64	Average
5150.000	34.50	8.89	34.34	34.31	43.36	54.00	10.64	Average
@ 5266.800	34.47	8.95	34.29	76.94	86.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

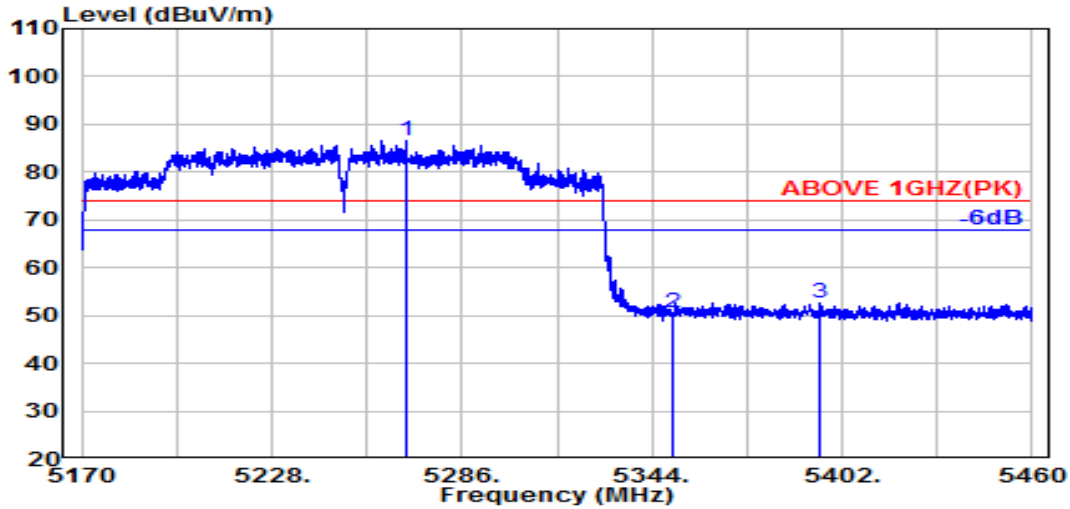

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.900	34.46	8.95	34.29	77.61	86.73	---	---	Peak
5350.000	34.90	9.00	34.26	41.01	50.65	74.00	23.35	Peak
5395.500	34.81	9.02	34.24	43.14	52.73	74.00	21.27	Peak

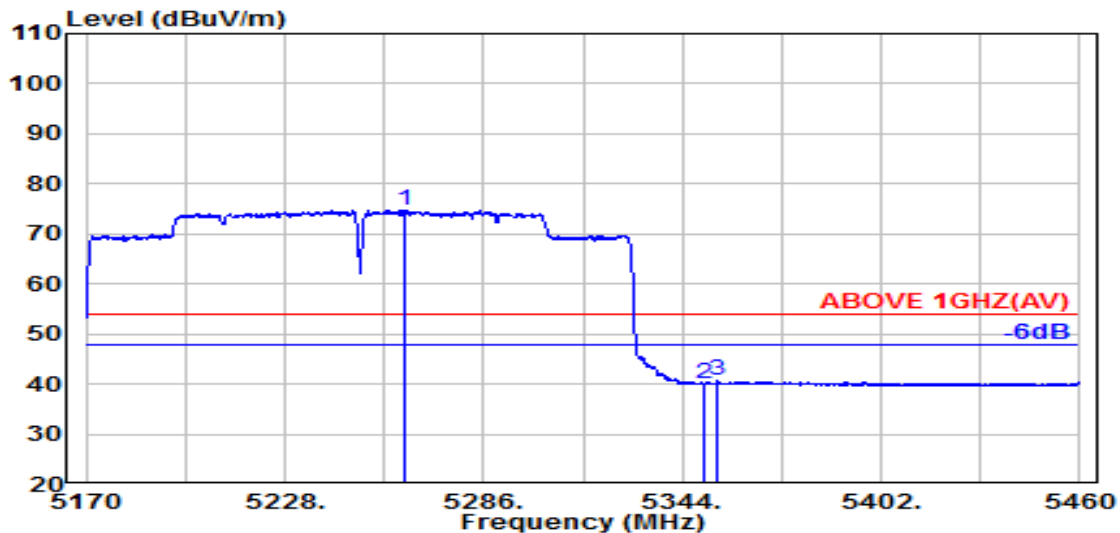


Antenna at Average Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5262.700	34.47	8.95	34.29	65.71	74.84	---	---	Average
5350.000	34.90	9.00	34.26	30.53	40.17	54.00	13.83	Average
5354.300	34.89	9.00	34.26	30.92	40.56	54.00	13.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

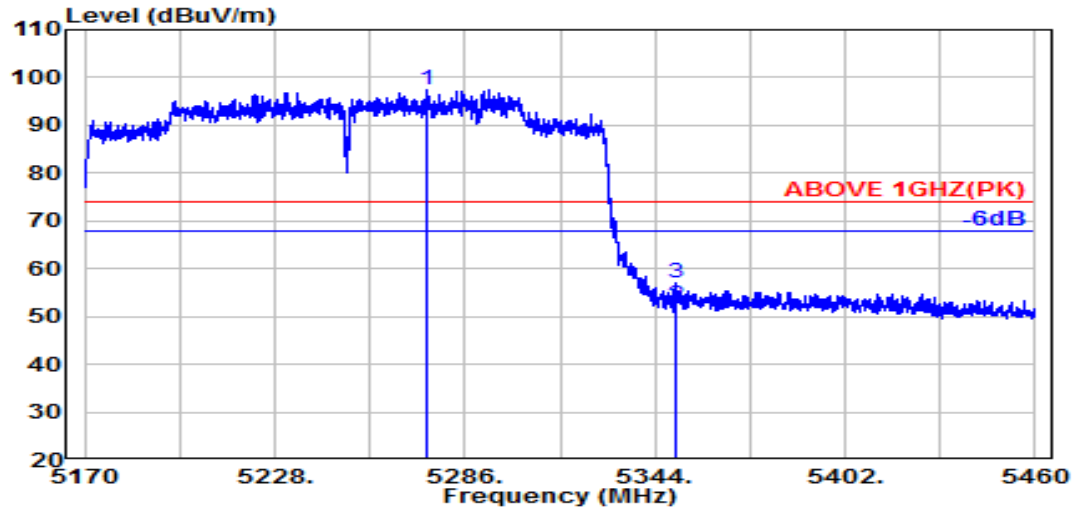

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5274.400	34.45	8.96	34.29	88.38	97.50	---	---	Peak
5350.000	34.90	9.00	34.26	42.65	52.29	74.00	21.71	Peak
5350.400	34.90	9.00	34.26	47.49	57.13	74.00	16.87	Peak

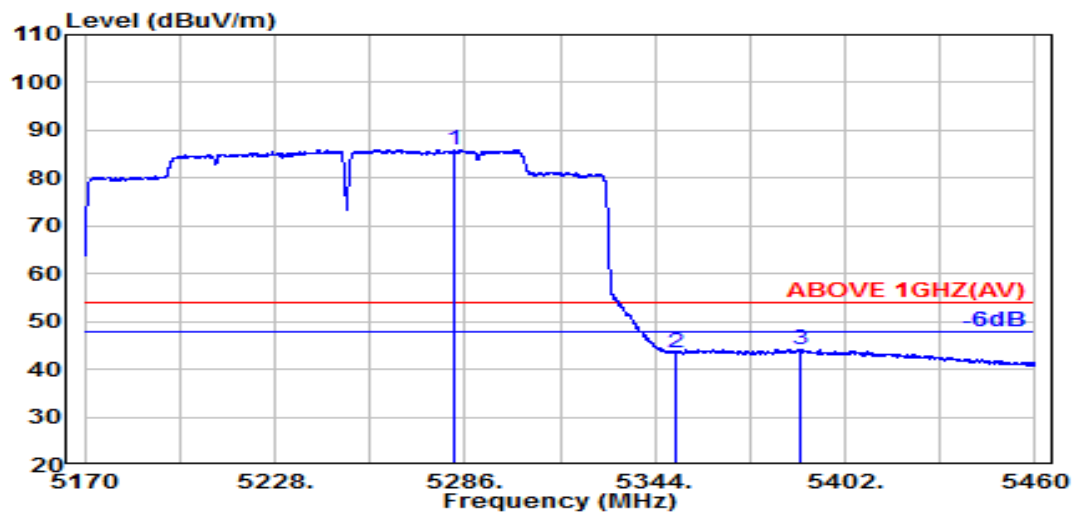


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.700	34.43	8.96	34.28	76.92	86.03	---	---	Average
5350.000	34.90	9.00	34.26	33.83	43.47	54.00	10.53	Average
5388.200	34.82	9.02	34.24	34.53	44.13	54.00	9.87	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

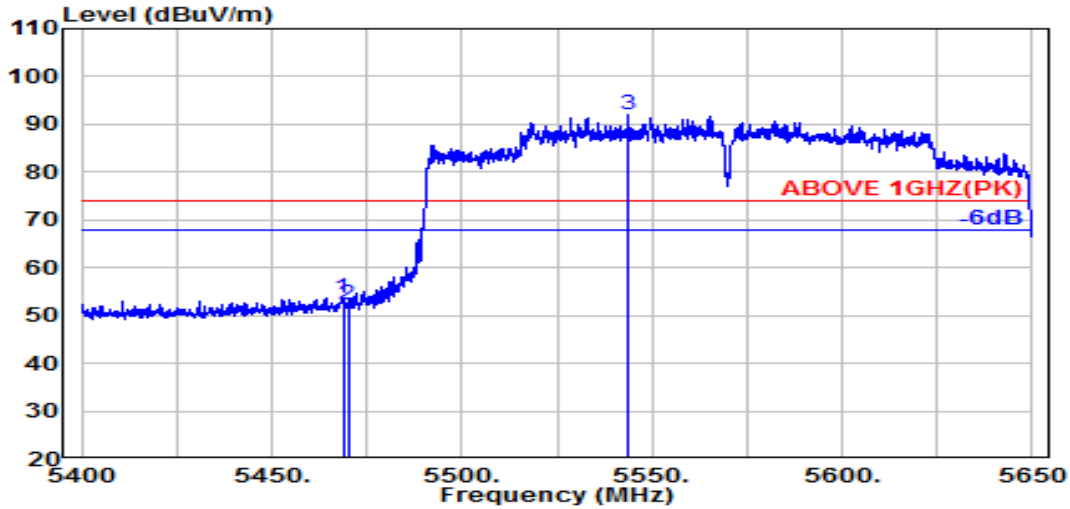

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.64	9.06	34.21	44.00	53.49	74.00	20.51	Peak
5470.000	34.64	9.06	34.21	42.70	52.19	74.00	21.81	Peak
@ 5543.700	34.70	9.10	34.22	82.41	91.99	---	---	Peak

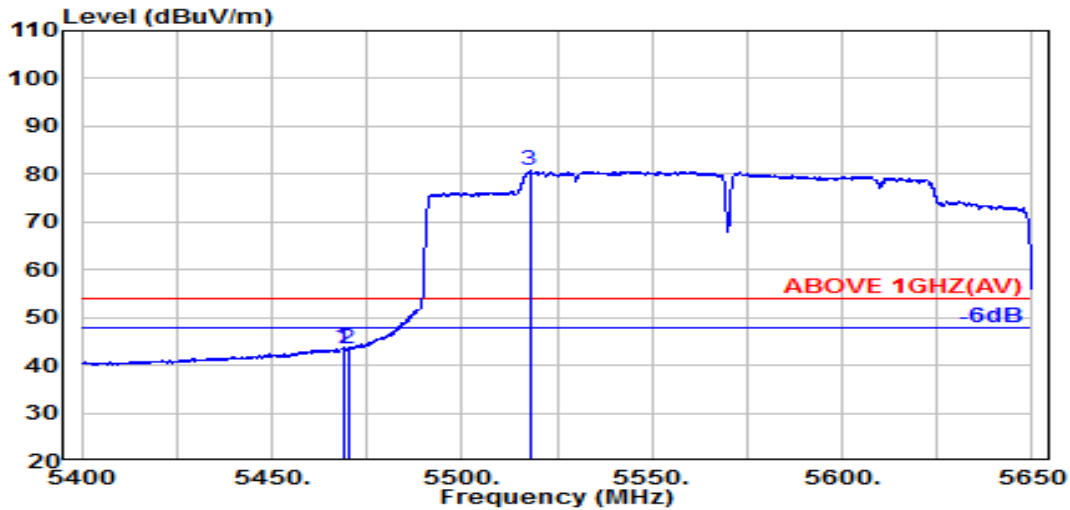


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.64	9.06	34.21	34.12	43.61	54.00	10.39	Average
5470.000	34.64	9.06	34.21	34.04	43.53	54.00	10.47	Average
@ 5517.800	34.70	9.09	34.21	71.08	80.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

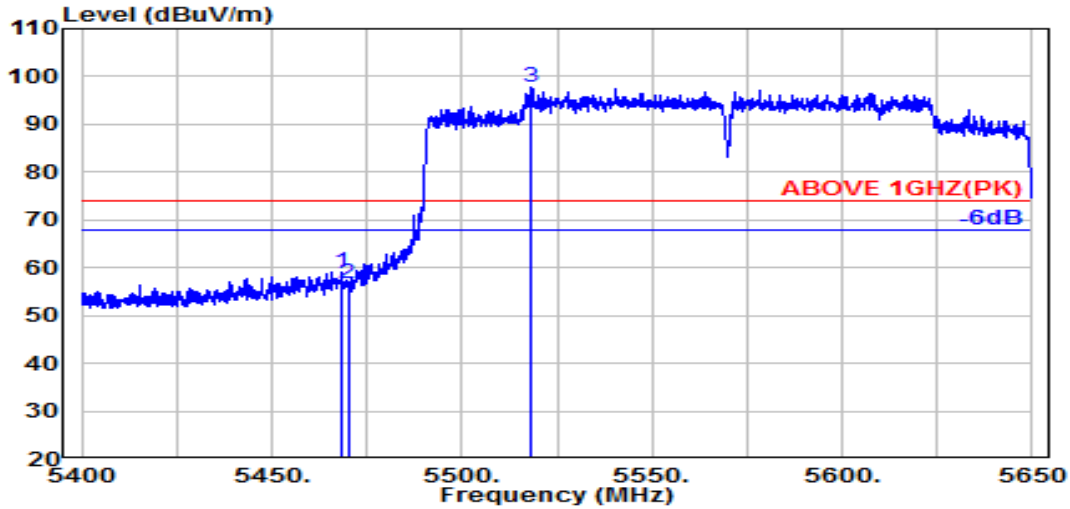

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.64	9.06	34.21	49.45	58.93	74.00	15.07	Peak
5470.000	34.64	9.06	34.21	47.07	56.56	74.00	17.44	Peak
@ 5518.200	34.70	9.09	34.21	88.06	97.64	---	---	Peak

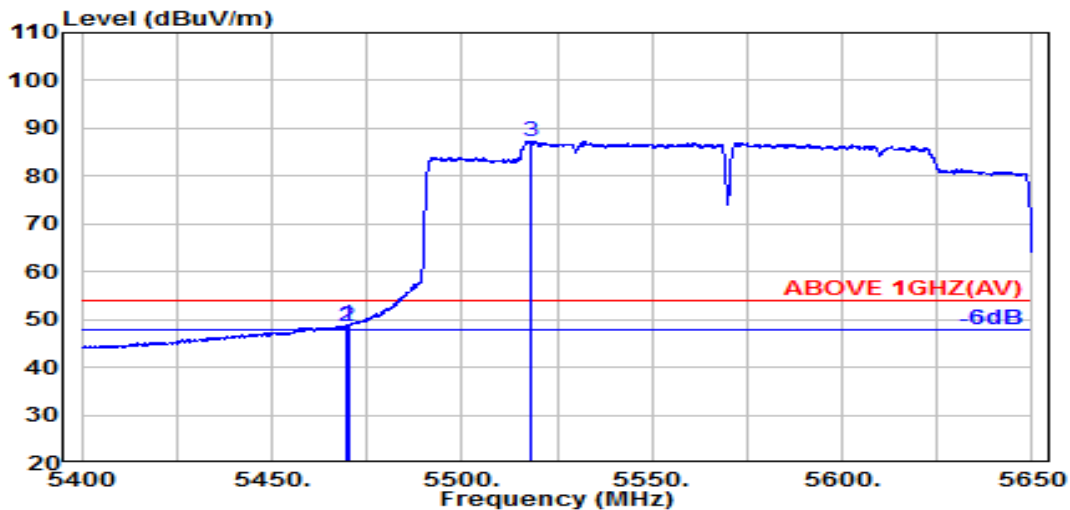


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.64	9.06	34.21	39.21	48.70	54.00	5.30	Average
5470.000	34.64	9.06	34.21	39.17	48.66	54.00	5.34	Average
@ 5518.200	34.70	9.09	34.21	77.82	87.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

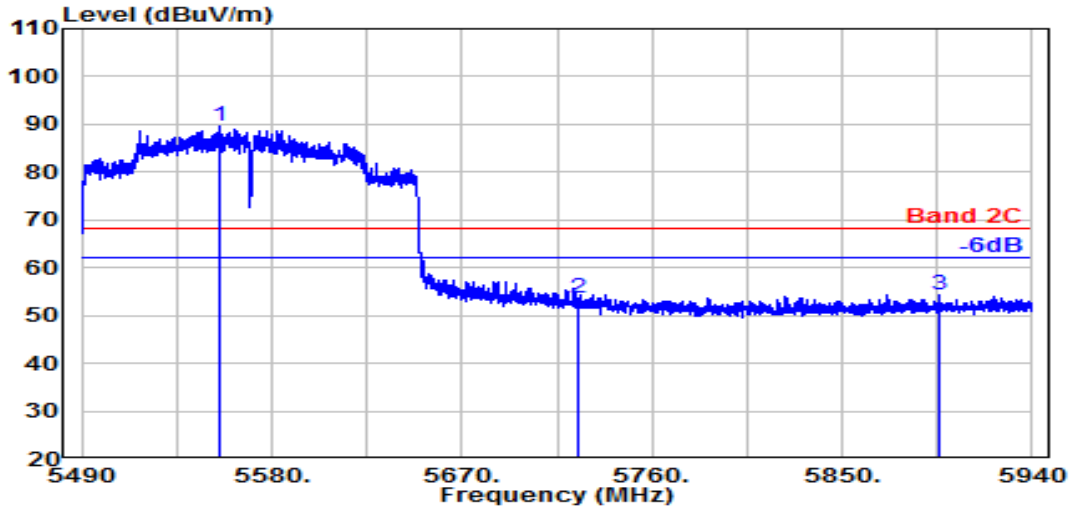

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5555.200	34.67	9.11	34.23	80.06	89.61	---	---	Peak
5725.000	34.85	9.19	34.31	43.74	53.47	68.20	14.73	Peak
5896.000	35.77	9.28	34.38	43.76	54.42	68.20	13.78	Peak

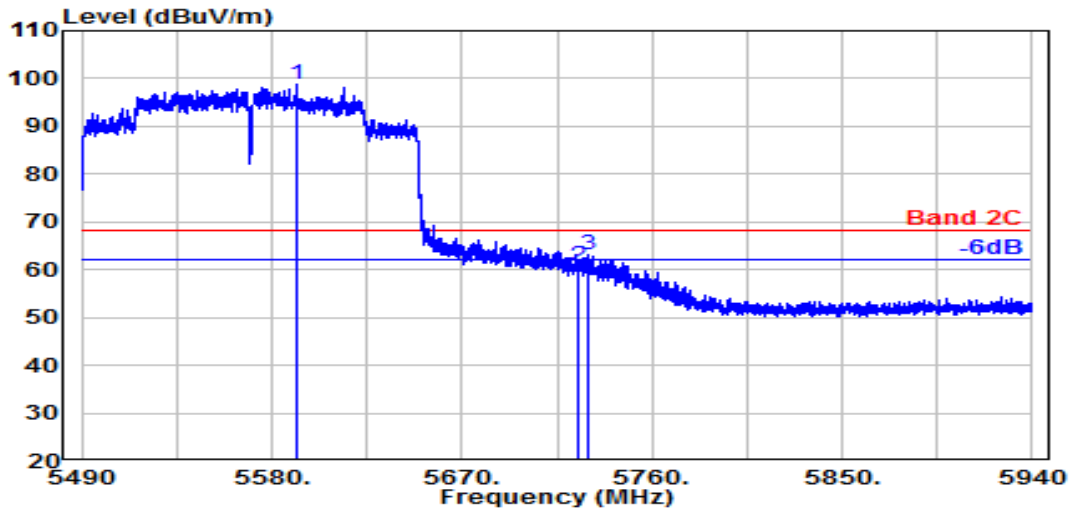


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5591.900	34.45	9.13	34.24	89.39	98.72	---	---	Peak
5725.000	34.85	9.19	34.31	51.08	60.82	68.20	7.38	Peak
5729.300	34.88	9.20	34.31	53.22	62.99	68.20	5.21	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

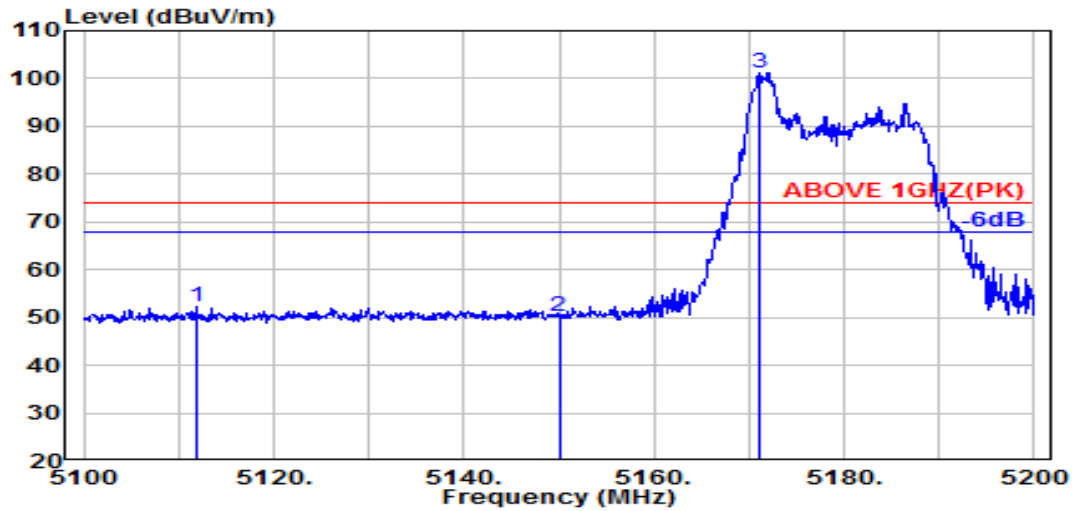

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.900	34.27	8.86	34.35	43.33	52.11	74.00	21.89	Peak
5150.000	34.50	8.89	34.34	41.10	50.15	74.00	23.85	Peak
@ 5171.200	34.59	8.90	34.33	91.94	101.09	---	---	Peak

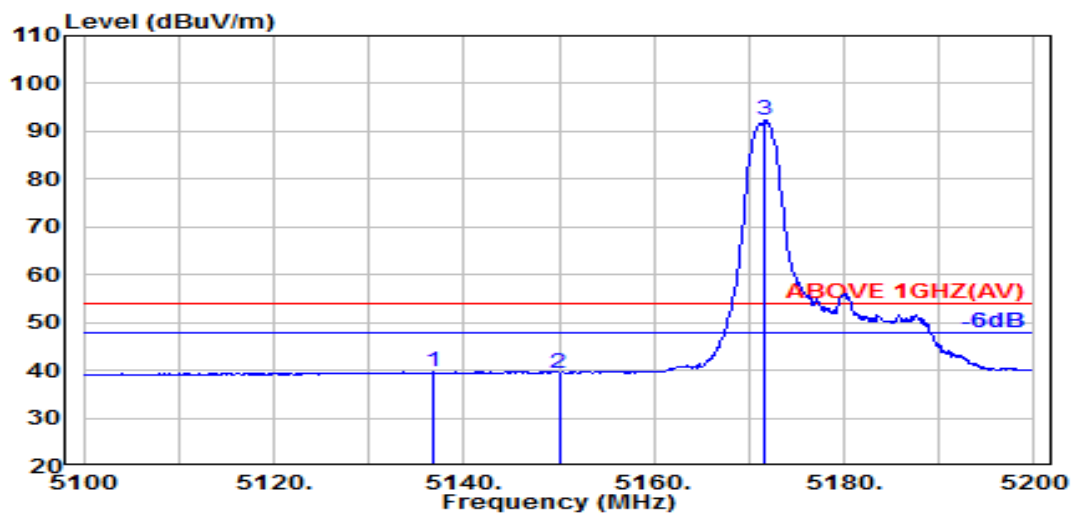


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.700	34.42	8.88	34.34	30.90	39.85	54.00	14.15	Average
5150.000	34.50	8.89	34.34	30.46	39.51	54.00	14.49	Average
@ 5171.700	34.59	8.90	34.33	83.10	92.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

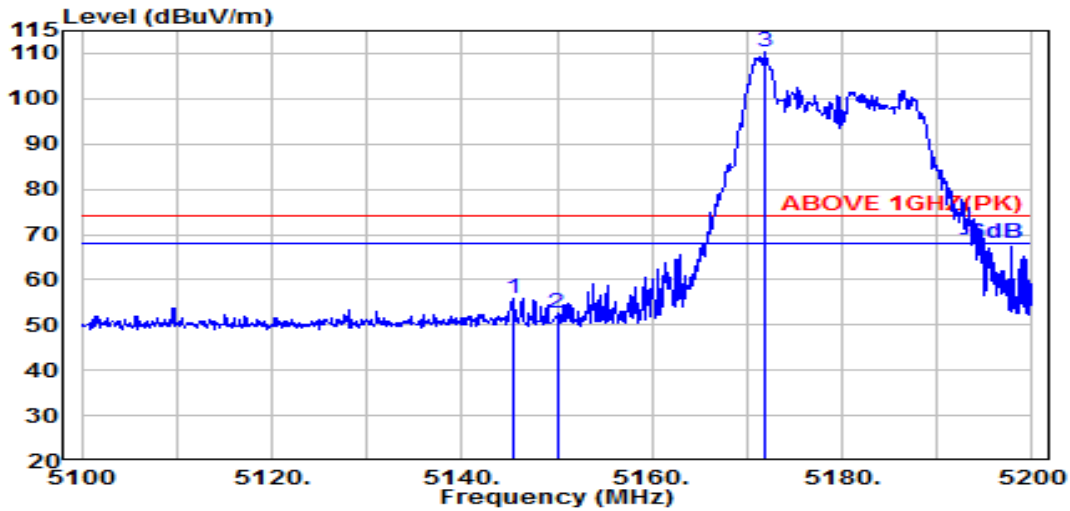

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.500	34.47	8.88	34.34	46.85	55.86	74.00	18.14	Peak
5150.000	34.50	8.89	34.34	43.62	52.66	74.00	21.34	Peak
@ 5171.900	34.59	8.90	34.33	101.08	110.24	---	---	Peak

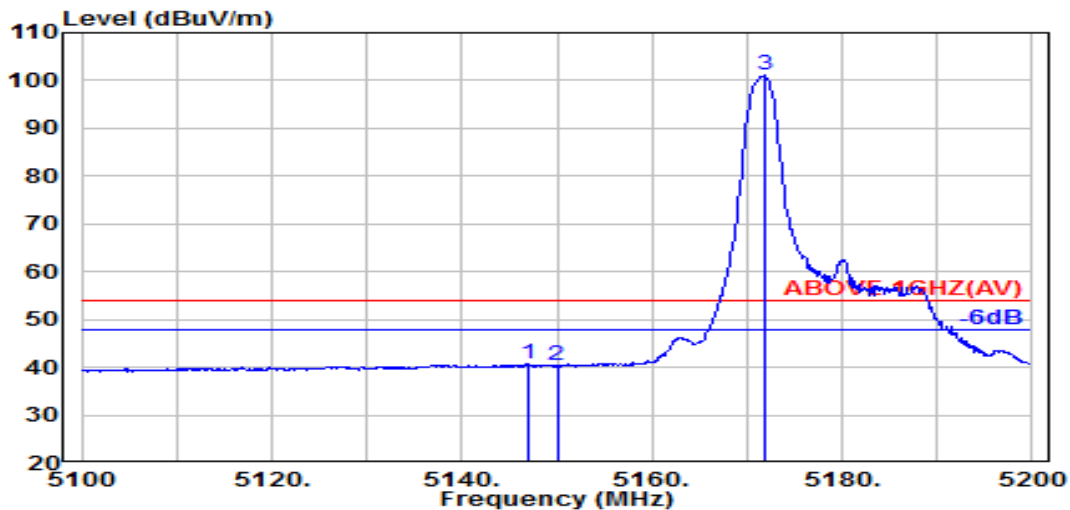


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.900	34.48	8.88	34.34	31.74	40.76	54.00	13.24	Average
5150.000	34.50	8.89	34.34	31.36	40.41	54.00	13.59	Average
@ 5171.800	34.59	8.90	34.33	92.02	101.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

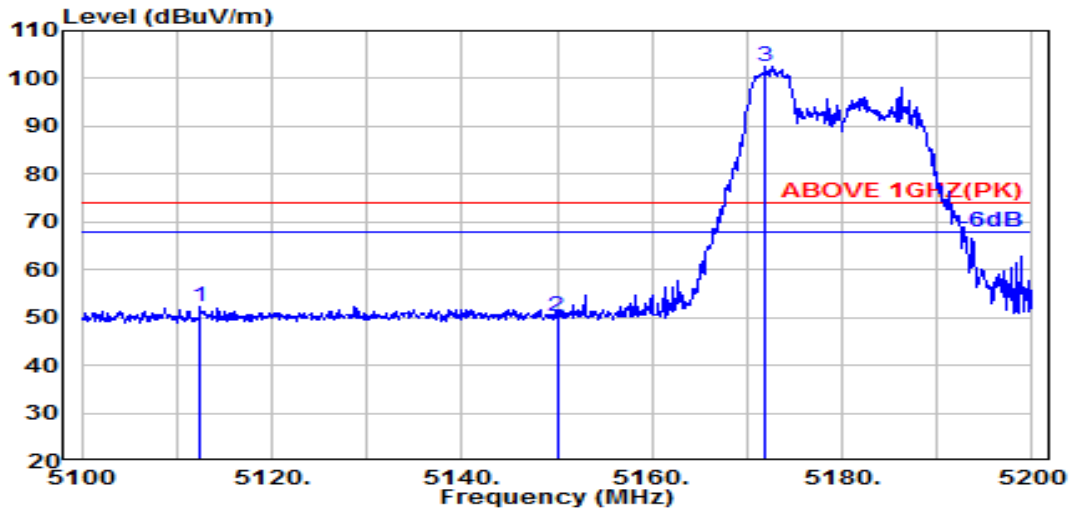

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.500	34.28	8.86	34.35	43.43	52.22	74.00	21.78	Peak
5150.000	34.50	8.89	34.34	41.13	50.18	74.00	23.82	Peak
@ 5171.900	34.59	8.90	34.33	93.44	102.59	---	---	Peak

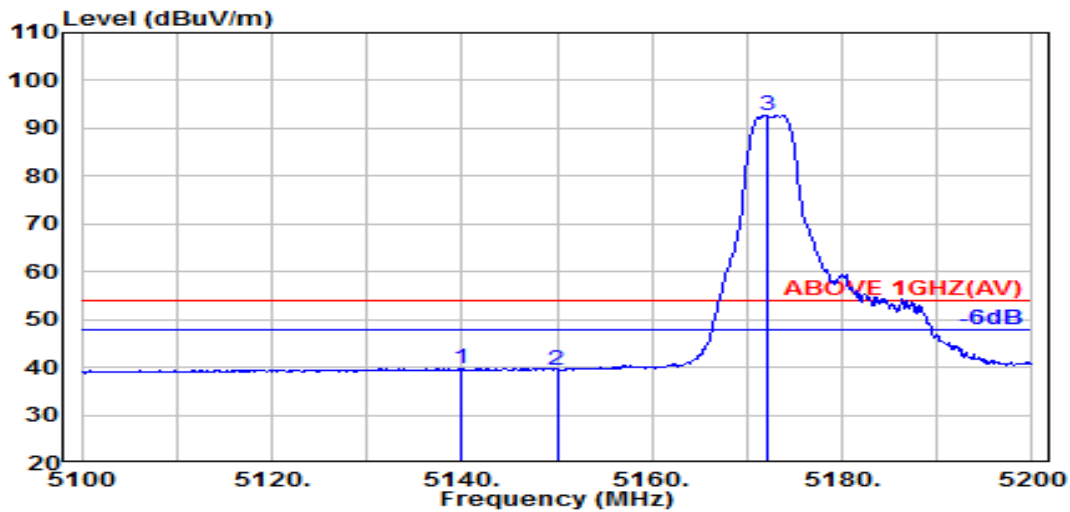


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.900	34.44	8.88	34.34	30.86	39.84	54.00	14.16	Average
5150.000	34.50	8.89	34.34	30.46	39.51	54.00	14.49	Average
@ 5172.100	34.59	8.90	34.33	83.68	92.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

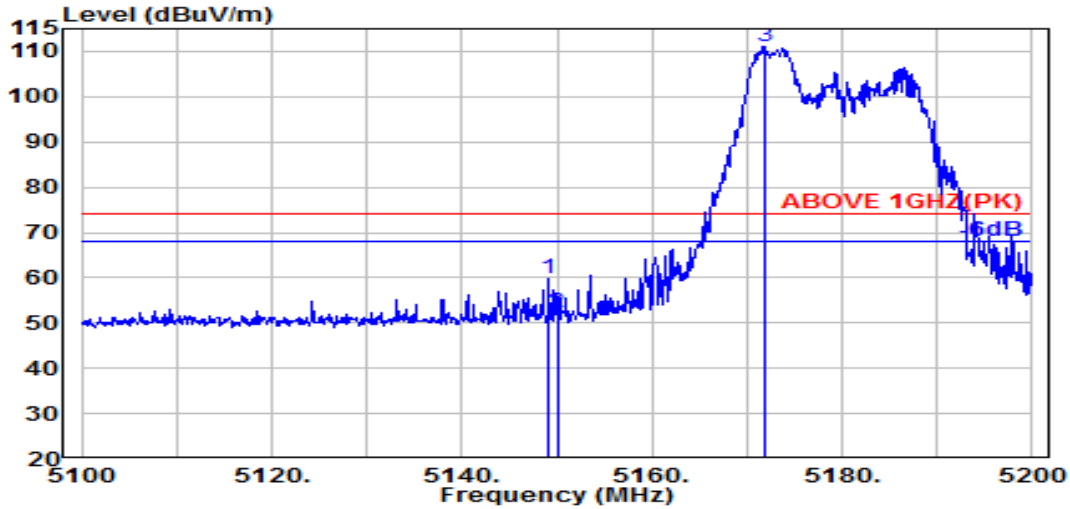

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.49	8.89	34.34	50.66	59.70	74.00	14.30	Peak
5150.000	34.50	8.89	34.34	43.32	52.36	74.00	21.64	Peak
@ 5171.900	34.59	8.90	34.33	102.06	111.21	---	---	Peak

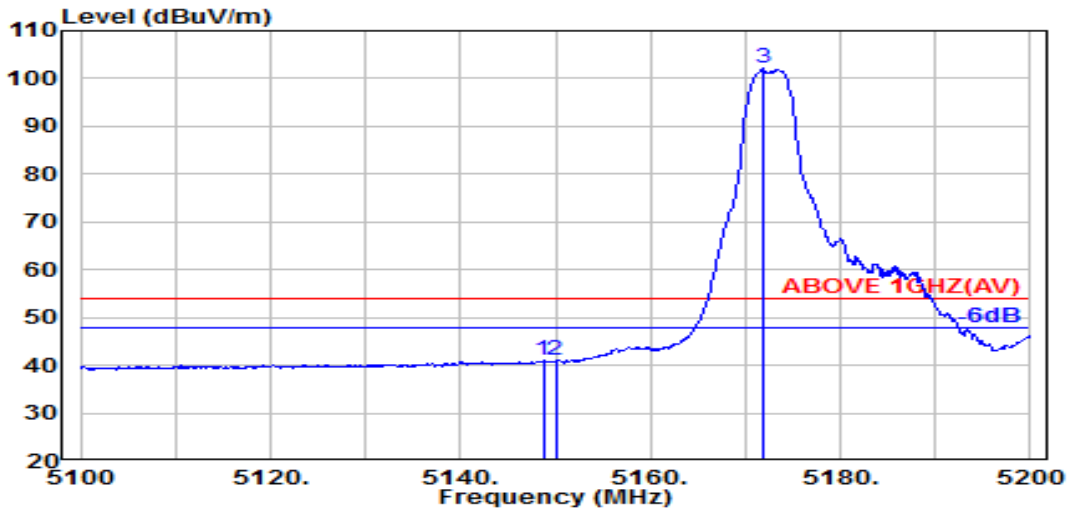


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	34.49	8.89	34.34	31.87	40.91	54.00	13.09	Average
5150.000	34.50	8.89	34.34	31.94	40.98	54.00	13.02	Average
@ 5171.800	34.59	8.90	34.33	92.90	102.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

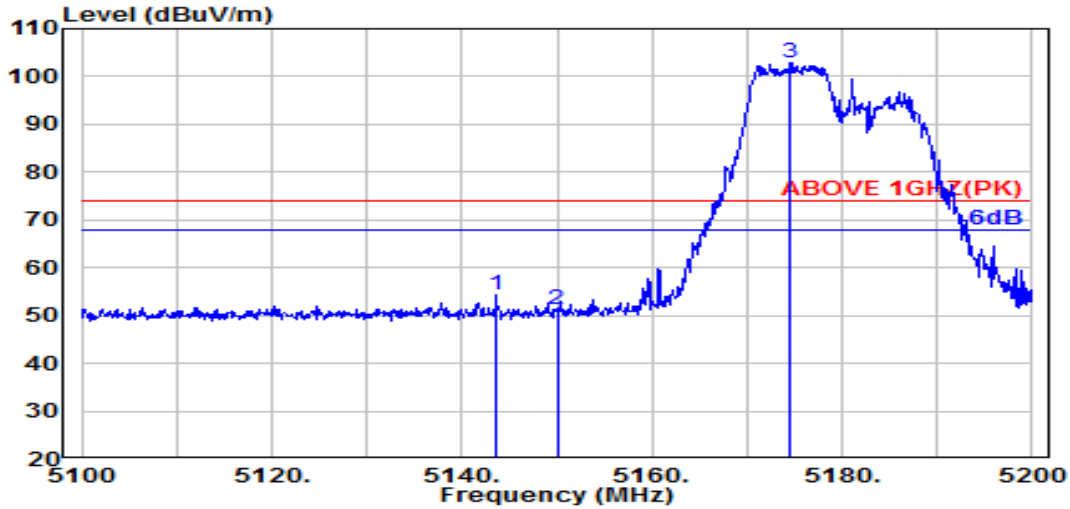

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.600	34.46	8.88	34.34	45.44	54.45	74.00	19.55	Peak
5150.000	34.50	8.89	34.34	42.23	51.28	74.00	22.72	Peak
@ 5174.600	34.60	8.90	34.33	93.65	102.82	---	---	Peak

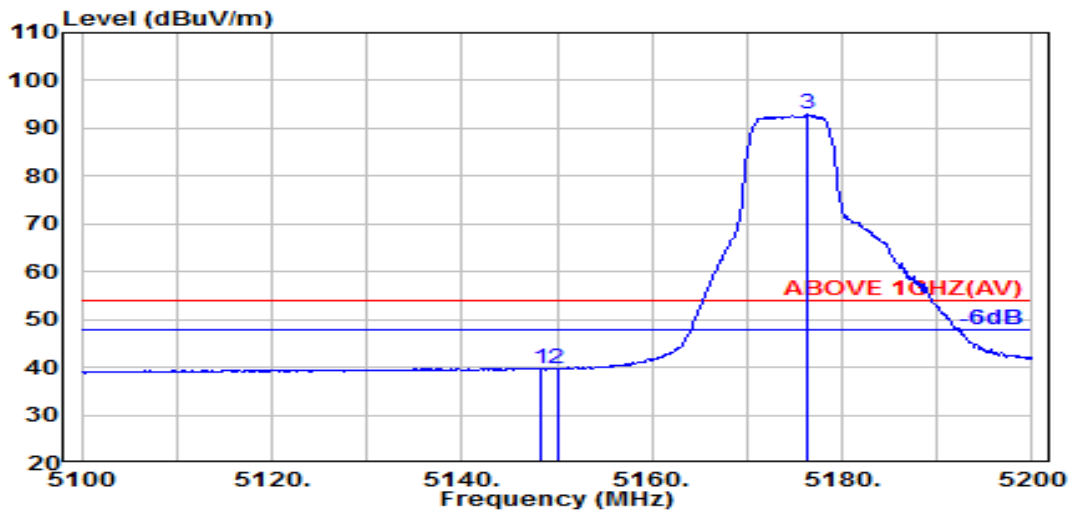


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	34.49	8.89	34.34	30.81	39.84	54.00	14.16	Average
5150.000	34.50	8.89	34.34	30.68	39.72	54.00	14.28	Average
@ 5176.400	34.61	8.90	34.33	83.69	92.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

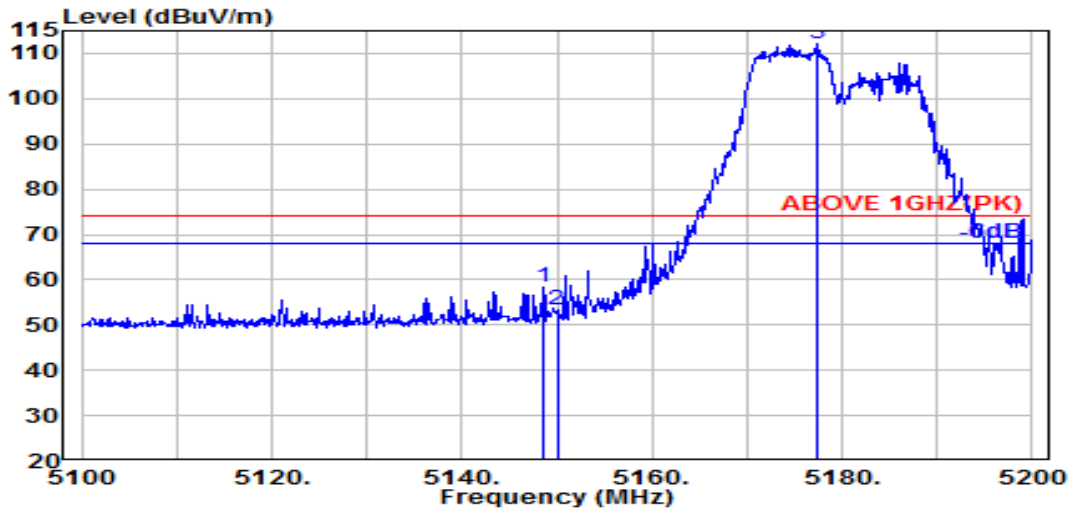

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.49	8.89	34.34	49.43	58.47	74.00	15.53	Peak
5150.000	34.50	8.89	34.34	44.41	53.46	74.00	20.54	Peak
@ 5177.400	34.61	8.90	34.33	102.97	112.16	---	---	Peak

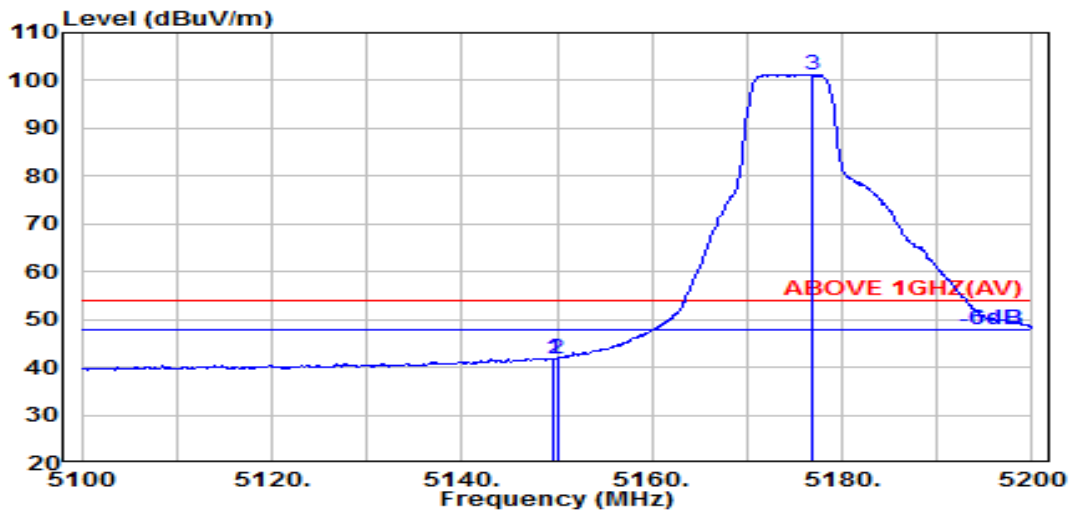


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	32.79	41.84	54.00	12.16	Average
5150.000	34.50	8.89	34.34	32.58	41.63	54.00	12.37	Average
@ 5176.800	34.61	8.90	34.33	92.13	101.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

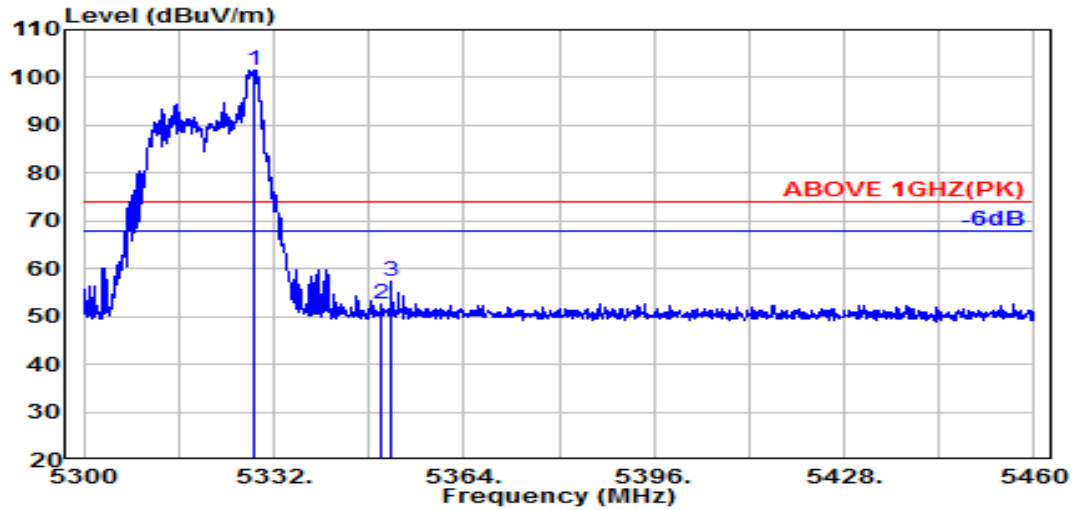

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	34.69	8.99	34.27	92.11	101.52	---	---	Peak
5350.000	34.90	9.00	34.26	42.82	52.46	74.00	21.54	Peak
5351.600	34.90	9.00	34.26	47.85	57.48	74.00	16.52	Peak

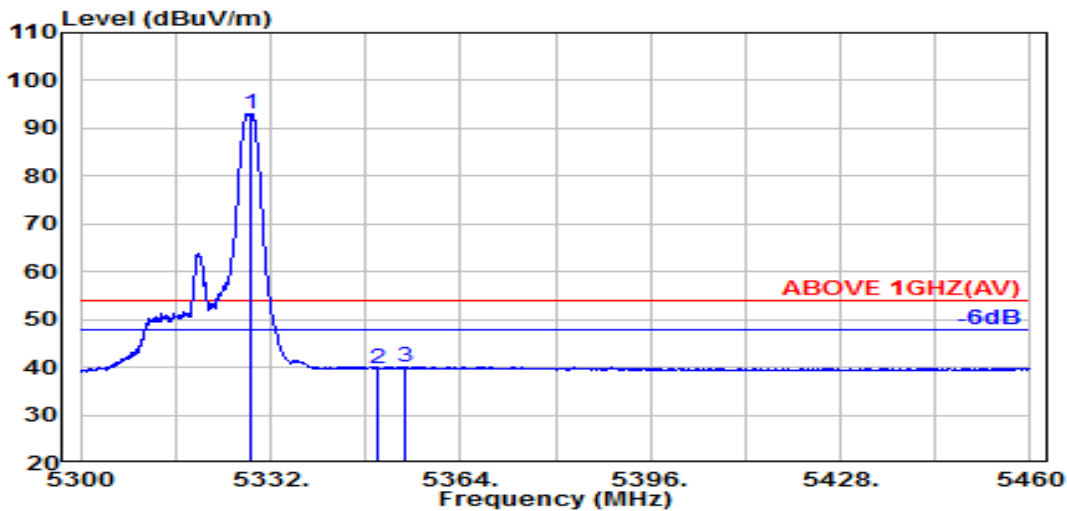

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	34.69	8.99	34.27	83.72	93.13	---	---	Average
5350.000	34.90	9.00	34.26	29.97	39.61	54.00	14.39	Average
5354.700	34.89	9.00	34.26	30.47	40.10	54.00	13.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

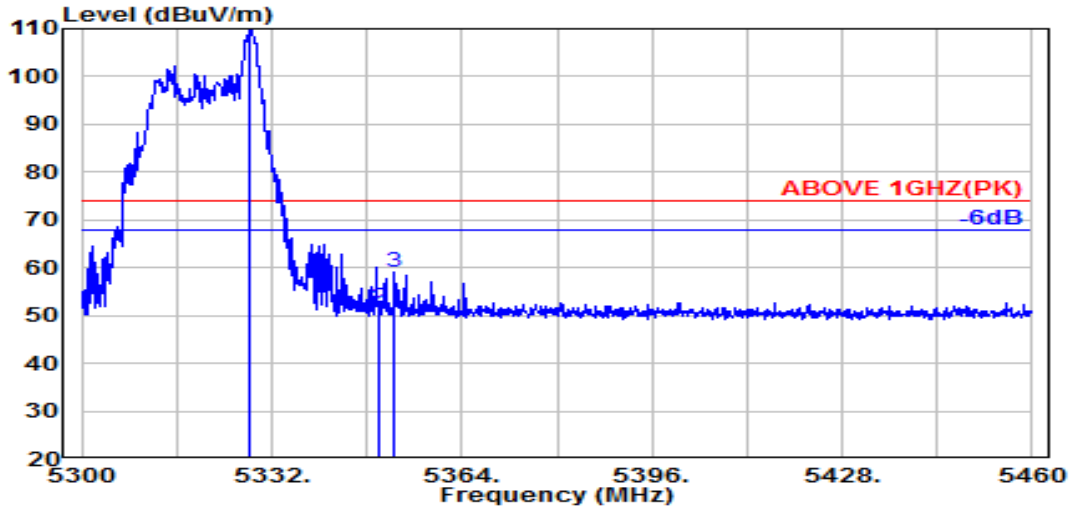

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	34.68	8.98	34.27	100.56	109.96	---	---	Peak
5350.000	34.90	9.00	34.26	41.79	51.43	74.00	22.57	Peak
5352.700	34.89	9.00	34.26	49.58	59.22	74.00	14.78	Peak

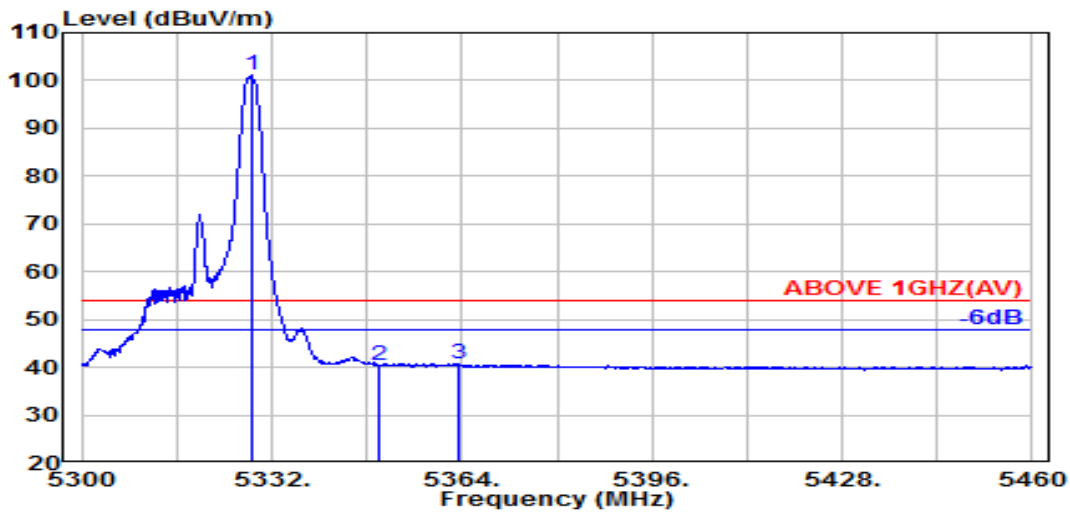


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	34.69	8.99	34.27	91.85	101.26	---	---	Average
5350.000	34.90	9.00	34.26	30.83	40.47	54.00	13.53	Average
5363.300	34.87	9.00	34.25	31.09	40.72	54.00	13.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

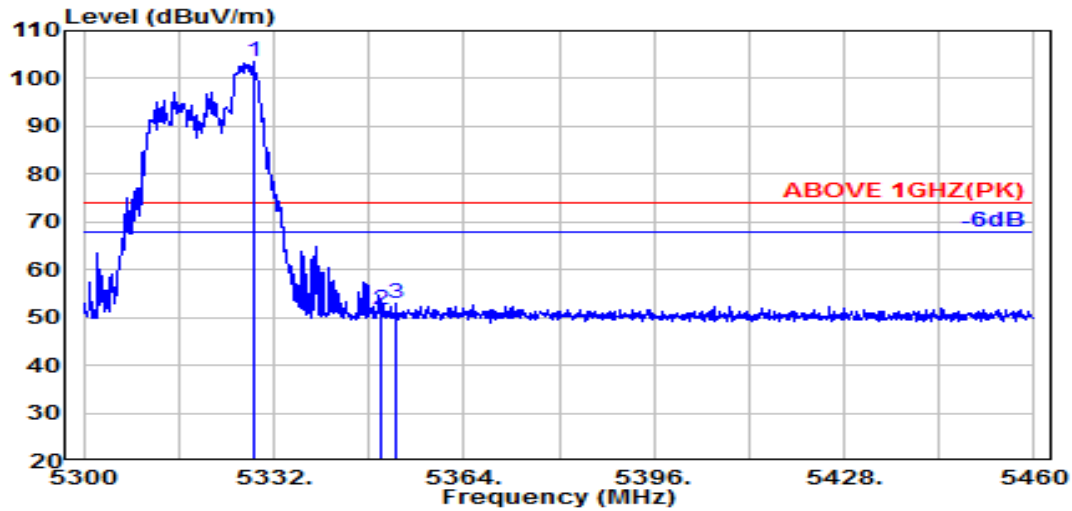

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	34.69	8.98	34.27	94.20	103.61	---	---	Peak
5350.000	34.90	9.00	34.26	41.96	51.60	74.00	22.40	Peak
5352.600	34.89	9.00	34.26	43.38	53.02	74.00	20.98	Peak

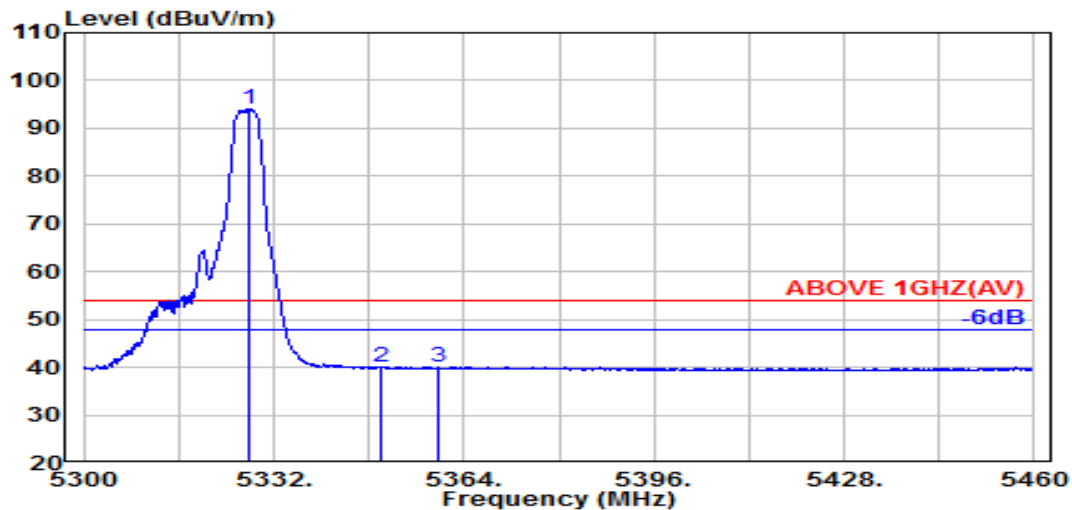


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	34.68	8.98	34.27	84.63	94.02	---	---	Average
5350.000	34.90	9.00	34.26	30.29	39.93	54.00	14.07	Average
5359.800	34.88	9.00	34.25	30.42	40.05	54.00	13.95	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

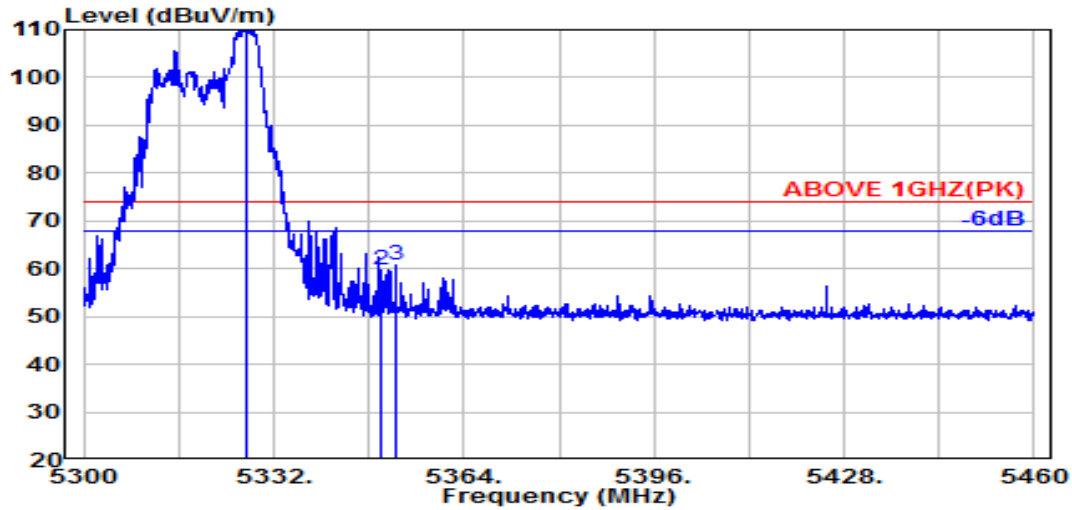

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	34.67	8.98	34.27	101.85	111.24	---	---	Peak
5350.000	34.90	9.00	34.26	50.11	59.74	74.00	14.26	Peak
5352.500	34.89	9.00	34.26	51.25	60.89	74.00	13.11	Peak

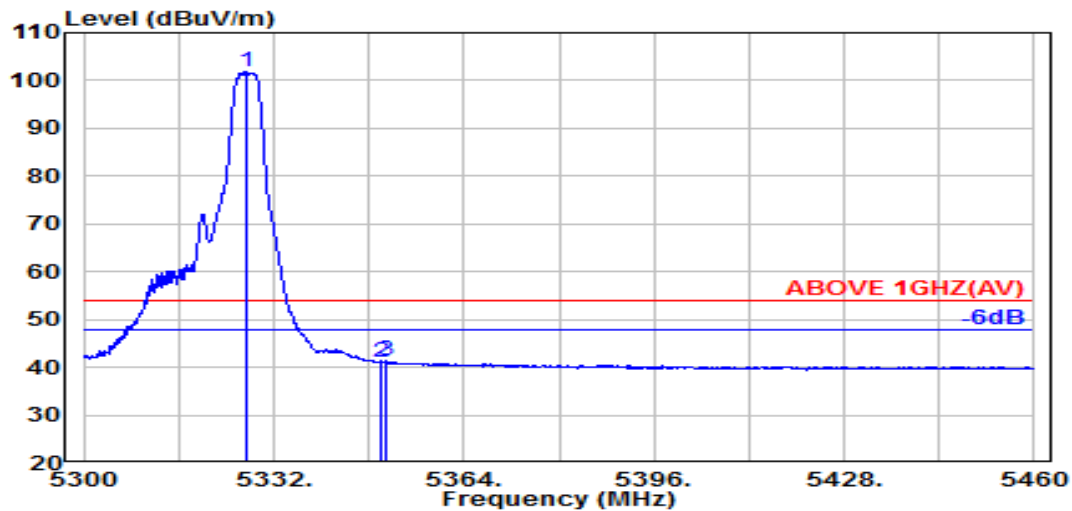


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.400	34.67	8.98	34.27	92.43	101.82	---	---	Average
5350.000	34.90	9.00	34.26	31.30	40.94	54.00	13.06	Average
5350.700	34.90	9.00	34.26	31.62	41.26	54.00	12.74	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

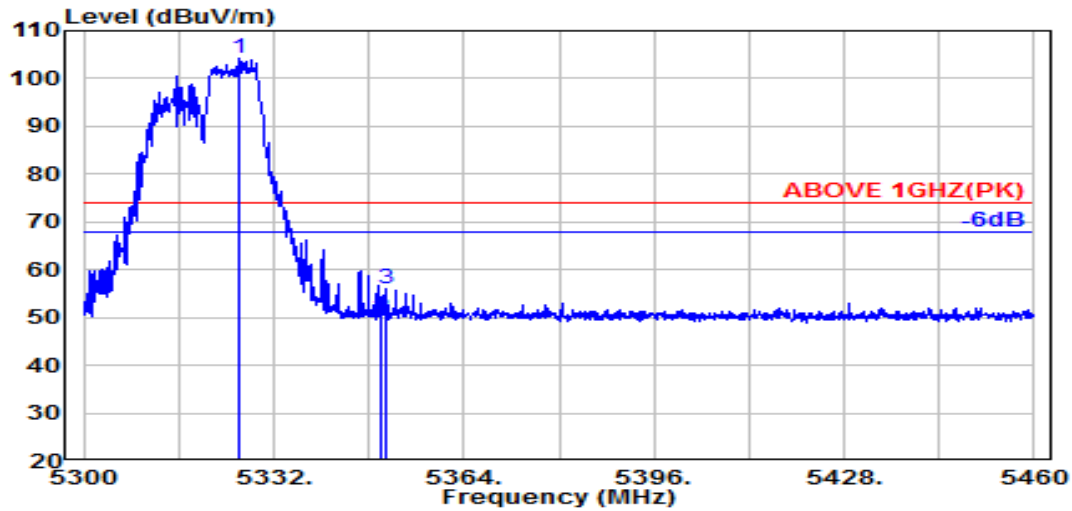

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.300	34.66	8.98	34.27	94.72	104.10	---	---	Peak
5350.000	34.90	9.00	34.26	40.30	49.94	74.00	24.06	Peak
5351.000	34.90	9.00	34.26	46.34	55.98	74.00	18.02	Peak

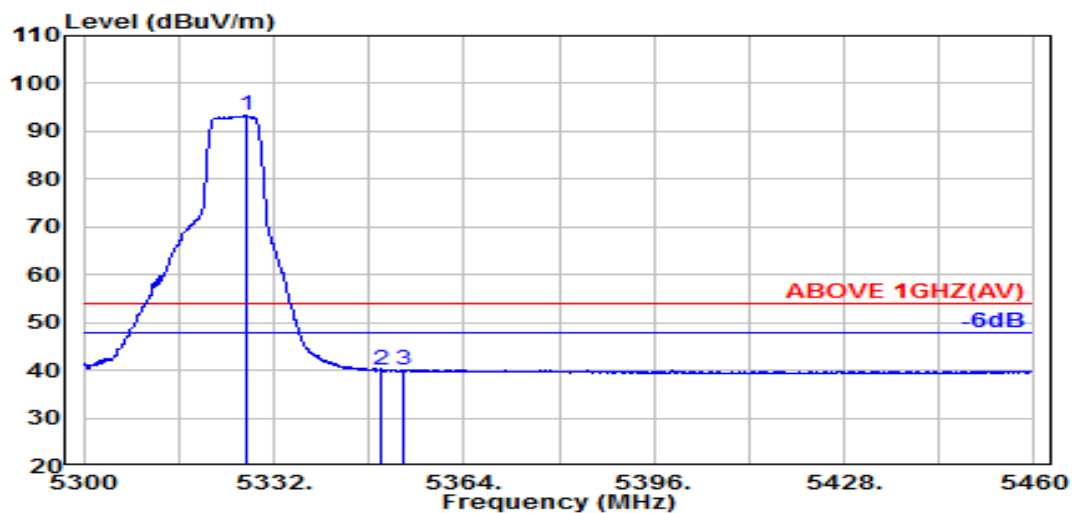


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.400	34.67	8.98	34.27	83.89	93.28	---	---	Average
5350.000	34.90	9.00	34.26	30.54	40.18	54.00	13.82	Average
5353.700	34.89	9.00	34.26	30.51	40.15	54.00	13.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

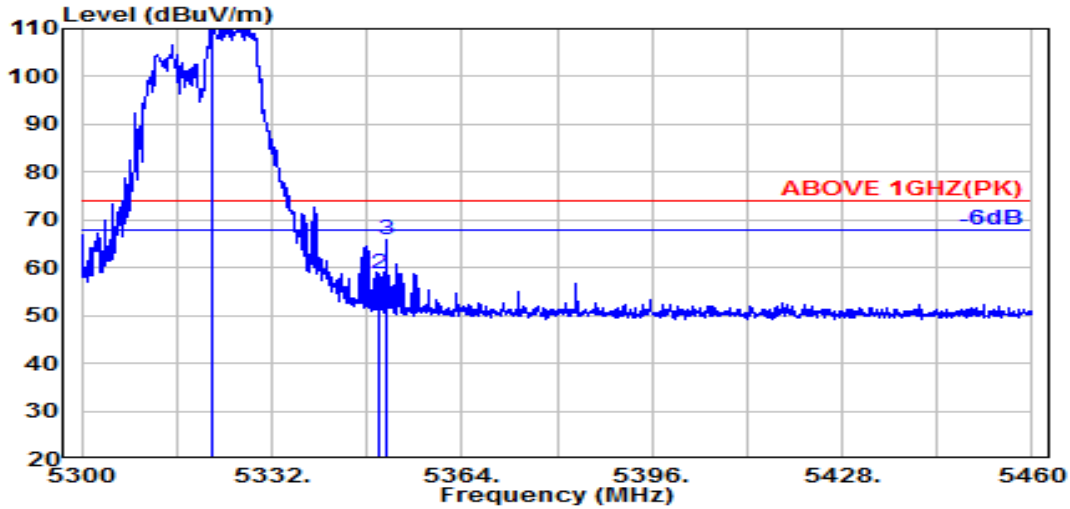

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	34.62	8.98	34.27	101.74	111.07	---	---	Peak
5350.000	34.90	9.00	34.26	49.17	58.81	74.00	15.19	Peak
5351.300	34.90	9.00	34.26	56.22	65.86	74.00	8.14	Peak

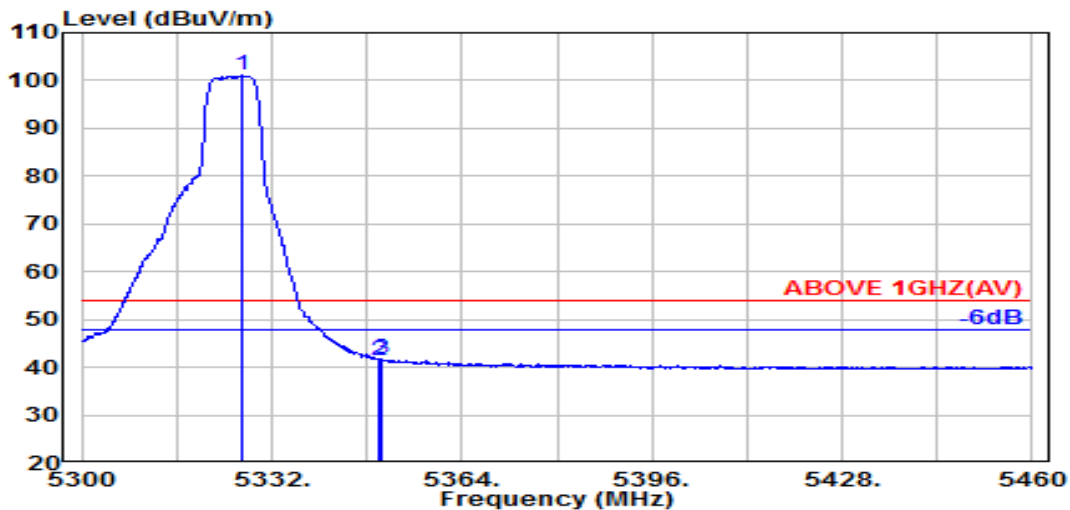


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	34.67	8.98	34.27	91.62	101.00	---	---	Average
5350.000	34.90	9.00	34.26	31.89	41.53	54.00	12.47	Average
5350.400	34.90	9.00	34.26	32.01	41.65	54.00	12.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

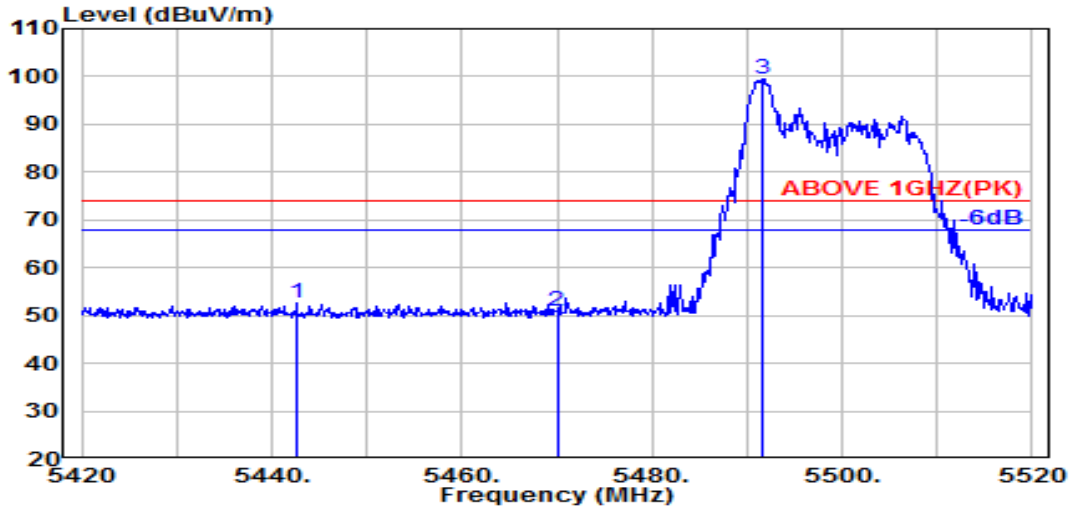

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.600	34.63	9.05	34.22	43.24	52.69	74.00	21.31	Peak
5470.000	34.64	9.06	34.21	41.34	50.83	74.00	23.17	Peak
@ 5491.500	34.68	9.07	34.20	90.00	99.55	---	---	Peak

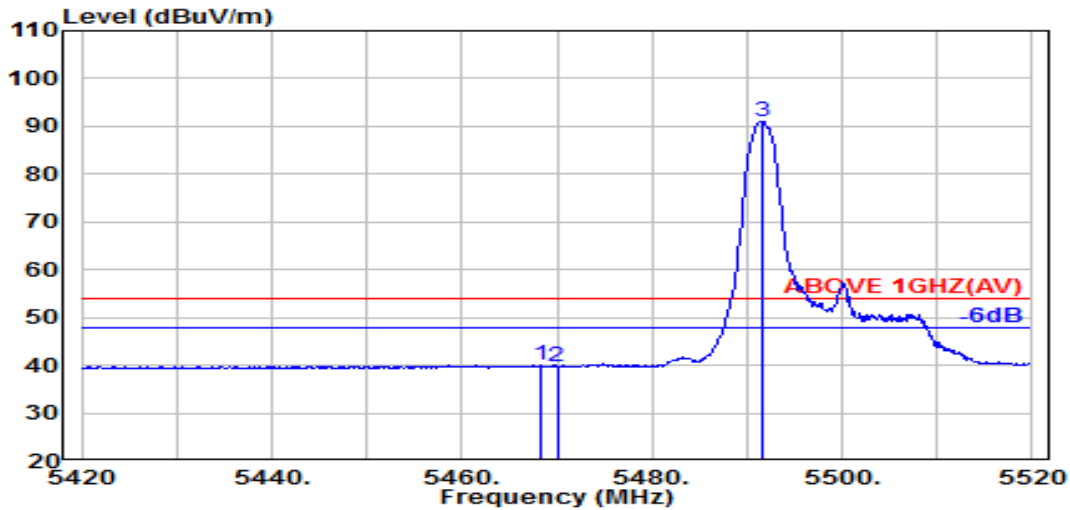


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.64	9.06	34.21	30.47	39.96	54.00	14.04	Average
5470.000	34.64	9.06	34.21	30.33	39.82	54.00	14.18	Average
@ 5491.500	34.68	9.07	34.20	81.37	90.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

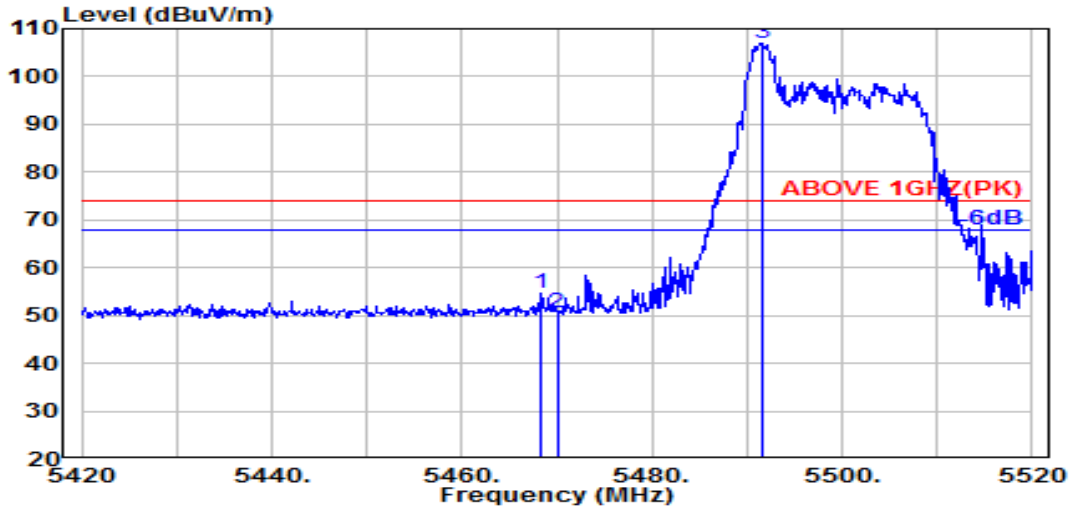

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.64	9.06	34.21	45.14	54.62	74.00	19.38	Peak
5470.000	34.64	9.06	34.21	41.15	50.63	74.00	23.37	Peak
@ 5491.500	34.68	9.07	34.20	97.31	106.86	---	---	Peak

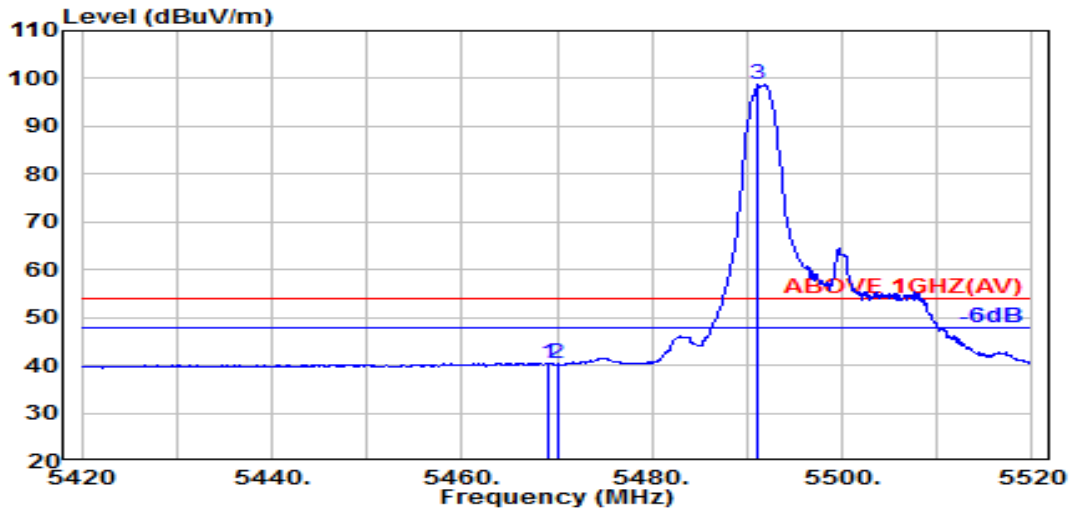


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	30.95	40.44	54.00	13.56	Average
5470.000	34.64	9.06	34.21	30.80	40.29	54.00	13.71	Average
@ 5491.200	34.68	9.07	34.20	89.21	98.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

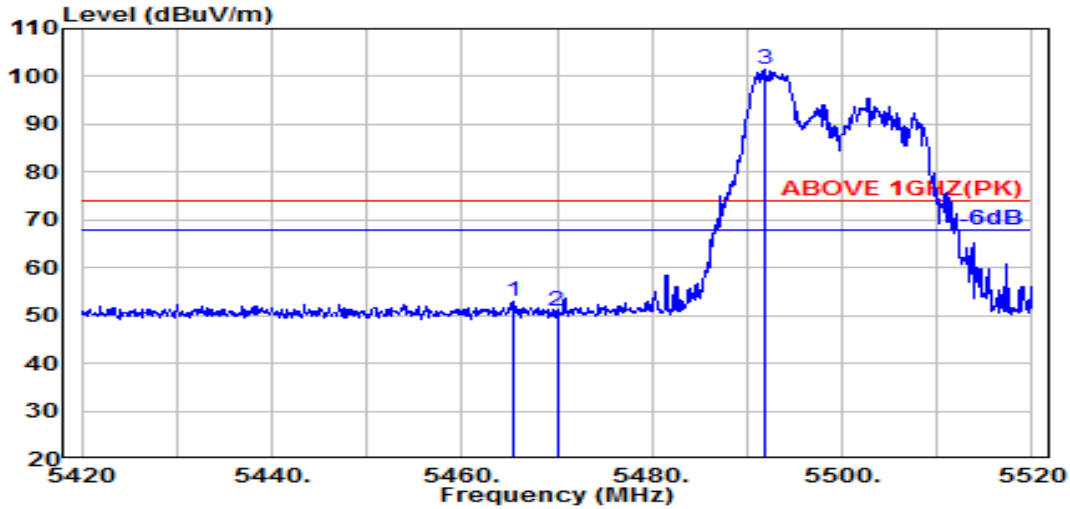

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.63	9.06	34.21	43.35	52.83	74.00	21.17	Peak
5470.000	34.64	9.06	34.21	41.32	50.81	74.00	23.19	Peak
@ 5491.800	34.68	9.07	34.20	92.00	101.56	---	---	Peak

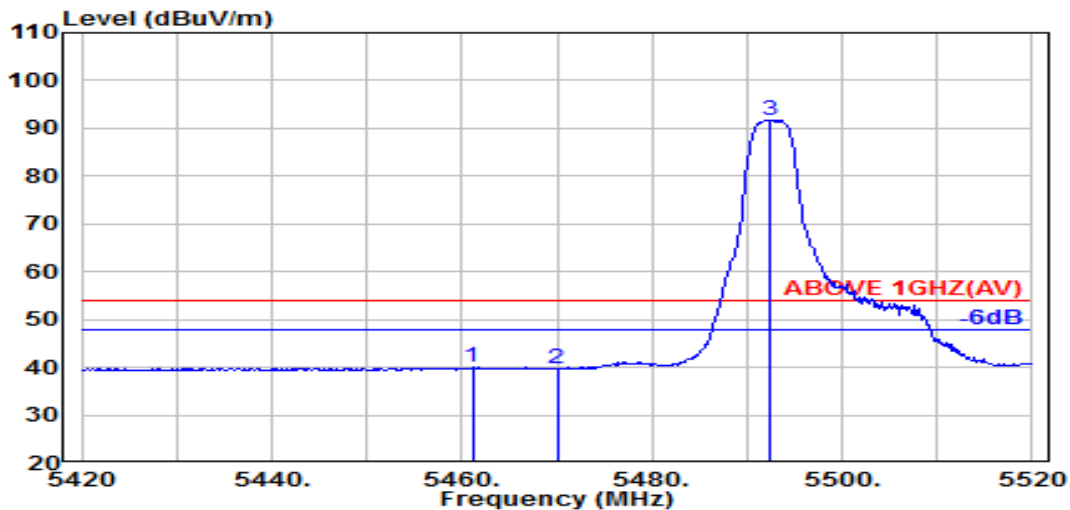


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.100	34.62	9.06	34.21	30.51	39.97	54.00	14.03	Average
5470.000	34.64	9.06	34.21	30.30	39.79	54.00	14.21	Average
@ 5492.400	34.68	9.07	34.20	82.12	91.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

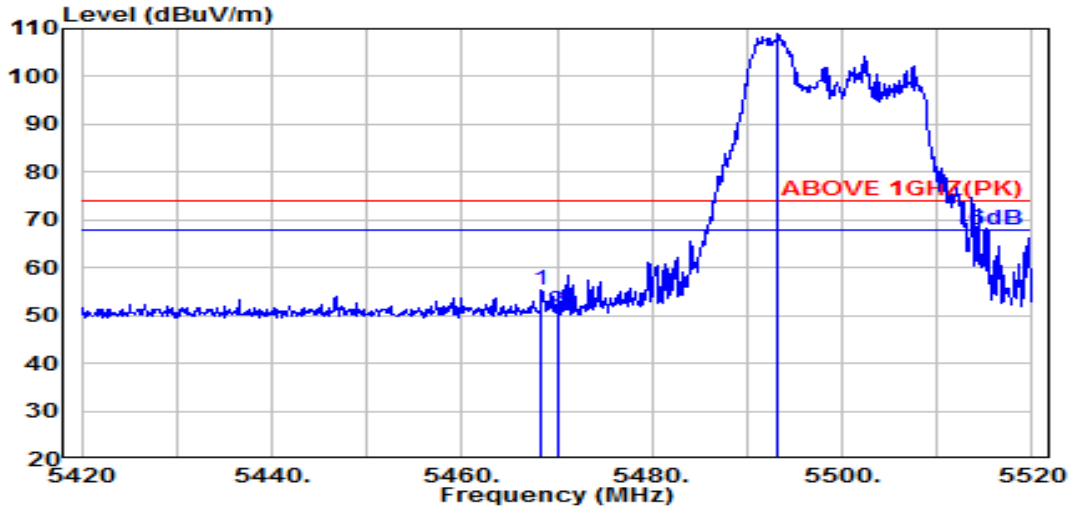

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.64	9.06	34.21	45.73	55.22	74.00	18.78	Peak
5470.000	34.64	9.06	34.21	41.37	50.86	74.00	23.14	Peak
@ 5493.200	34.69	9.07	34.20	99.40	108.95	---	---	Peak

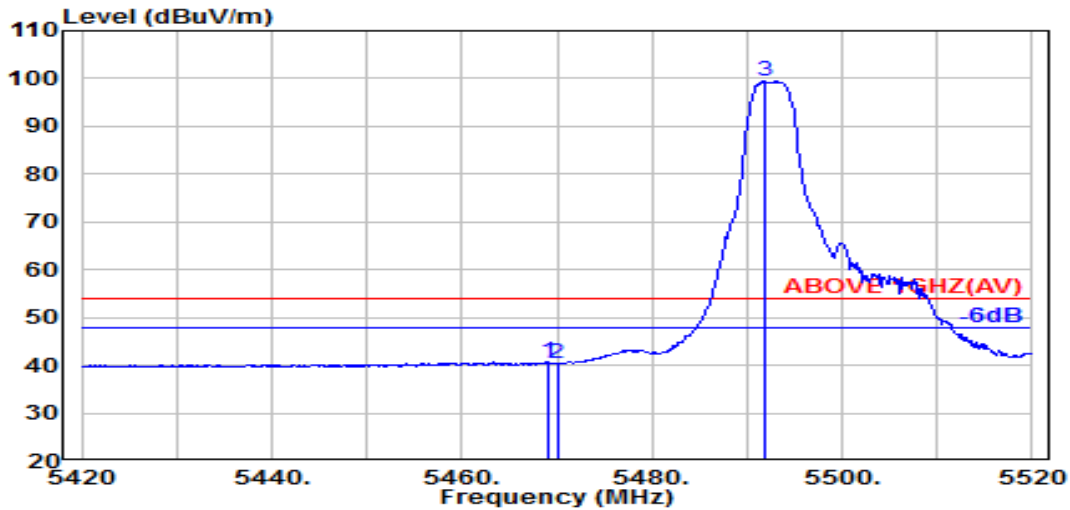


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	31.20	40.68	54.00	13.32	Average
5470.000	34.64	9.06	34.21	30.96	40.45	54.00	13.55	Average
@ 5491.800	34.68	9.07	34.20	90.09	99.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

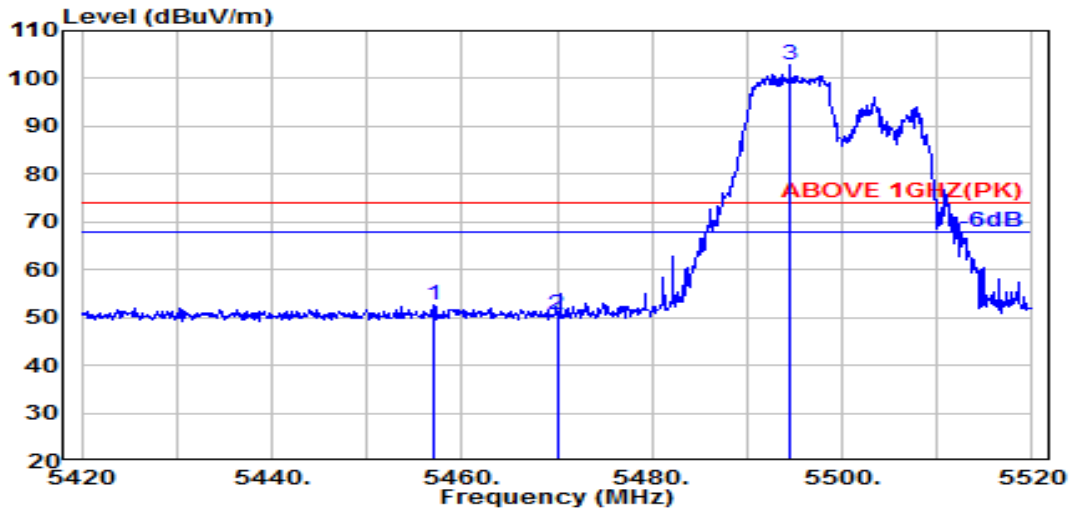

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.100	34.61	9.05	34.22	43.16	52.61	74.00	21.39	Peak
5470.000	34.64	9.06	34.21	40.94	50.43	74.00	23.57	Peak
@ 5494.500	34.69	9.07	34.20	93.33	102.89	---	---	Peak

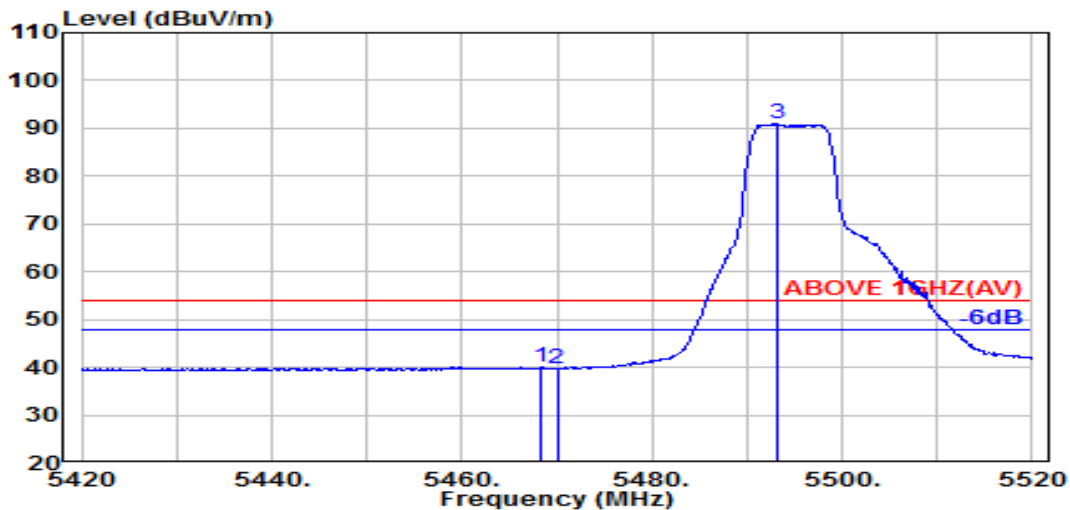


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.64	9.06	34.21	30.56	40.05	54.00	13.95	Average
5470.000	34.64	9.06	34.21	30.35	39.84	54.00	14.16	Average
@ 5493.100	34.69	9.07	34.20	81.34	90.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

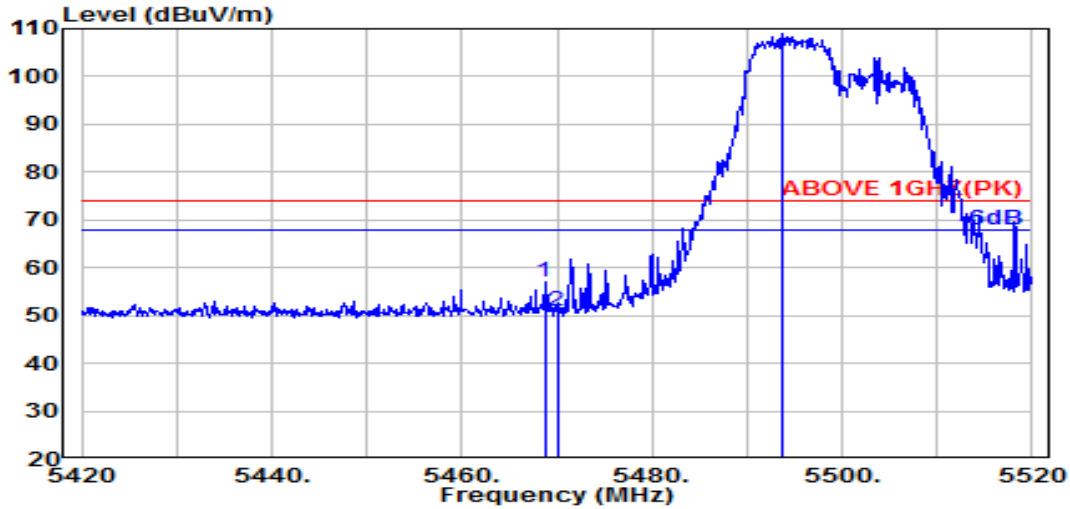

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.64	9.06	34.21	47.63	57.11	74.00	16.89	Peak
5470.000	34.64	9.06	34.21	41.37	50.86	74.00	23.14	Peak
@ 5493.800	34.69	9.07	34.20	99.43	108.99	---	---	Peak

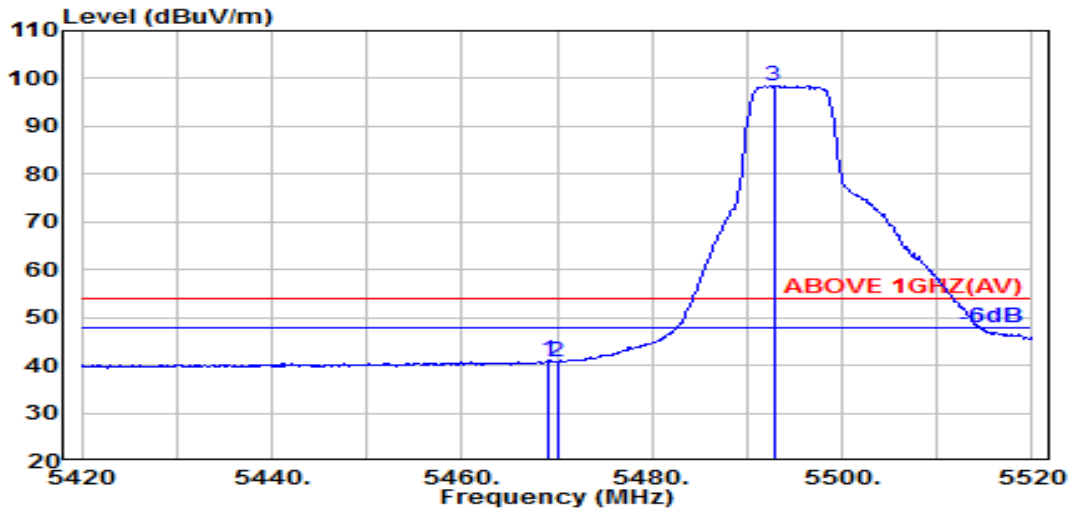


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	31.53	41.02	54.00	12.98	Average
5470.000	34.64	9.06	34.21	31.19	40.68	54.00	13.32	Average
@ 5492.800	34.69	9.07	34.20	88.98	98.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

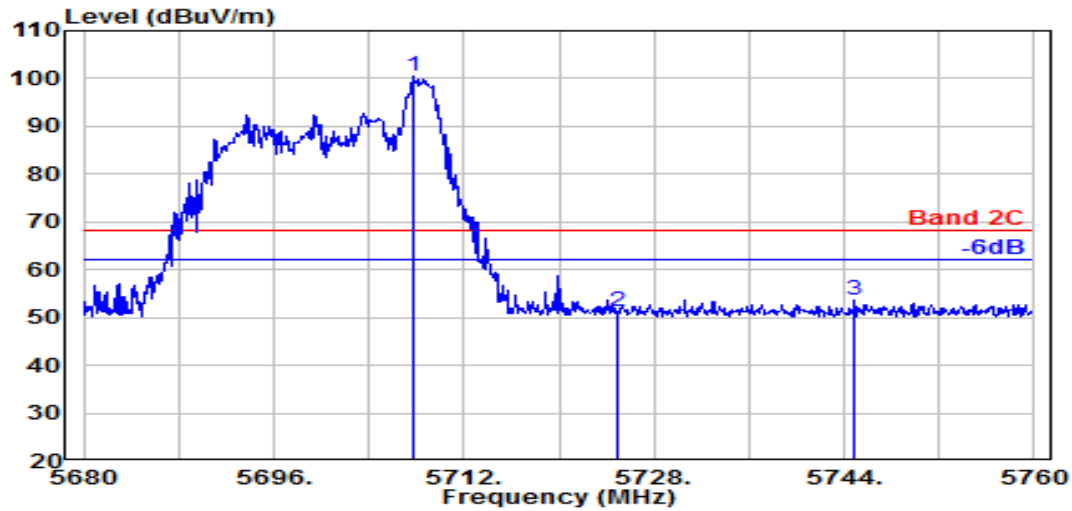

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.840	34.75	9.18	34.30	90.74	100.37	---	---	Peak
5725.000	34.85	9.19	34.31	41.46	51.20	68.20	17.00	Peak
5744.880	34.97	9.20	34.32	43.92	53.78	68.20	14.42	Peak

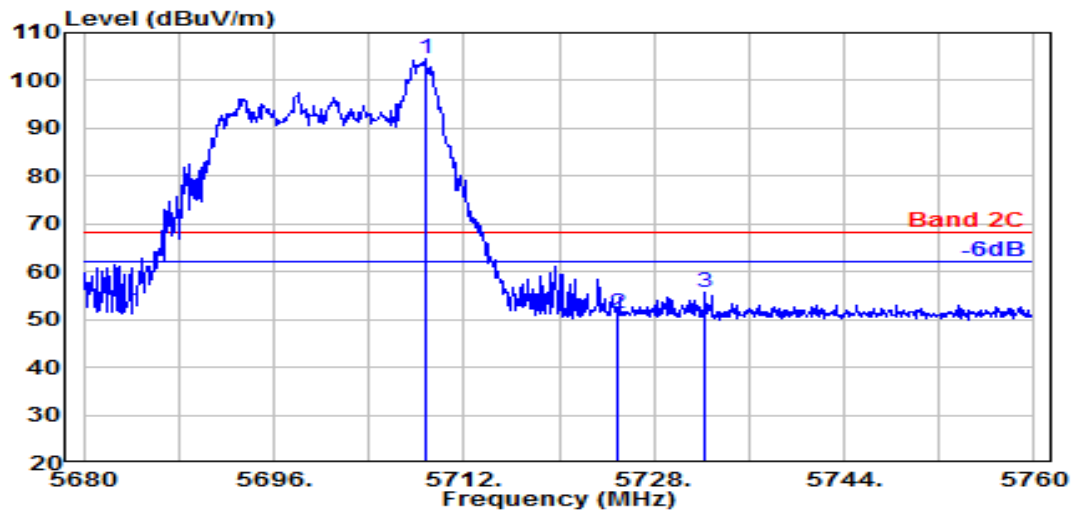


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.800	34.75	9.19	34.30	94.95	104.59	---	---	Peak
5725.000	34.85	9.19	34.31	41.60	51.34	68.20	16.86	Peak
5732.240	34.89	9.20	34.31	45.99	55.77	68.20	12.43	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

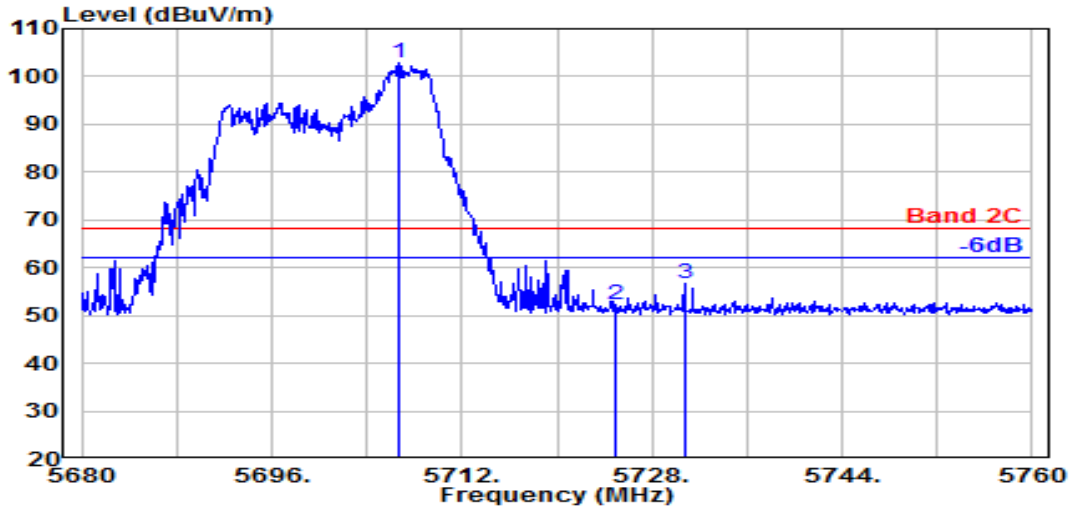

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.640	34.74	9.18	34.30	93.09	102.71	---	---	Peak
5725.000	34.85	9.19	34.31	42.65	52.39	68.20	15.81	Peak
5730.720	34.88	9.20	34.31	47.01	56.78	68.20	11.42	Peak

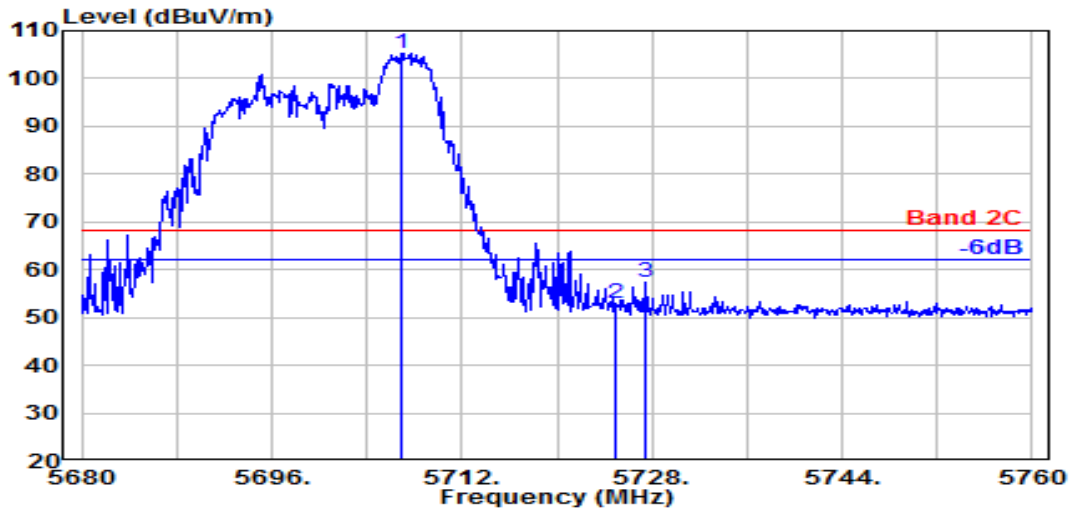


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.960	34.74	9.18	34.30	95.68	105.31	---	---	Peak
5725.000	34.85	9.19	34.31	43.07	52.81	68.20	15.39	Peak
5727.520	34.87	9.19	34.31	47.51	57.26	68.20	10.94	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

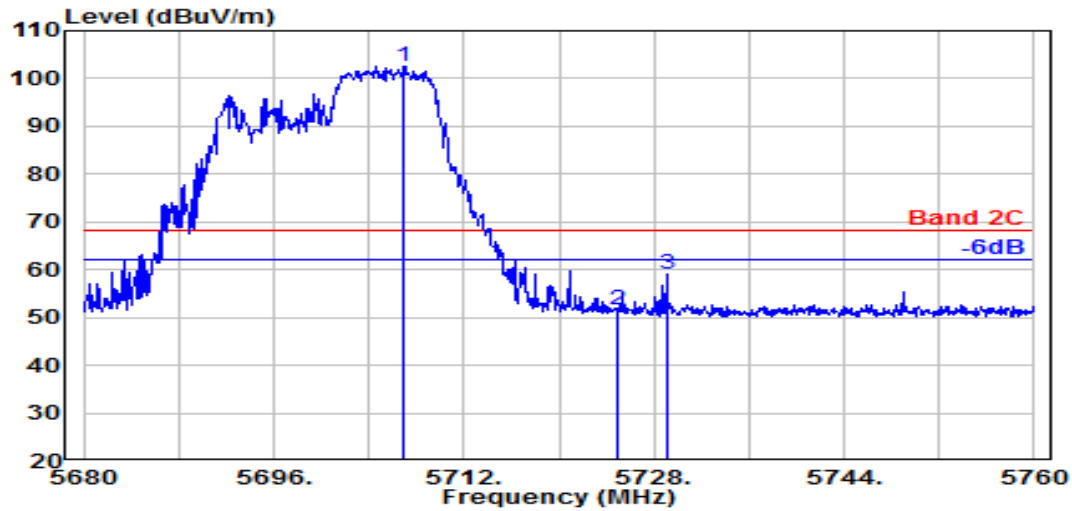

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.960	34.74	9.18	34.30	93.04	102.67	---	---	Peak
5725.000	34.85	9.19	34.31	41.98	51.72	68.20	16.48	Peak
5729.040	34.87	9.20	34.31	49.21	58.97	68.20	9.23	Peak

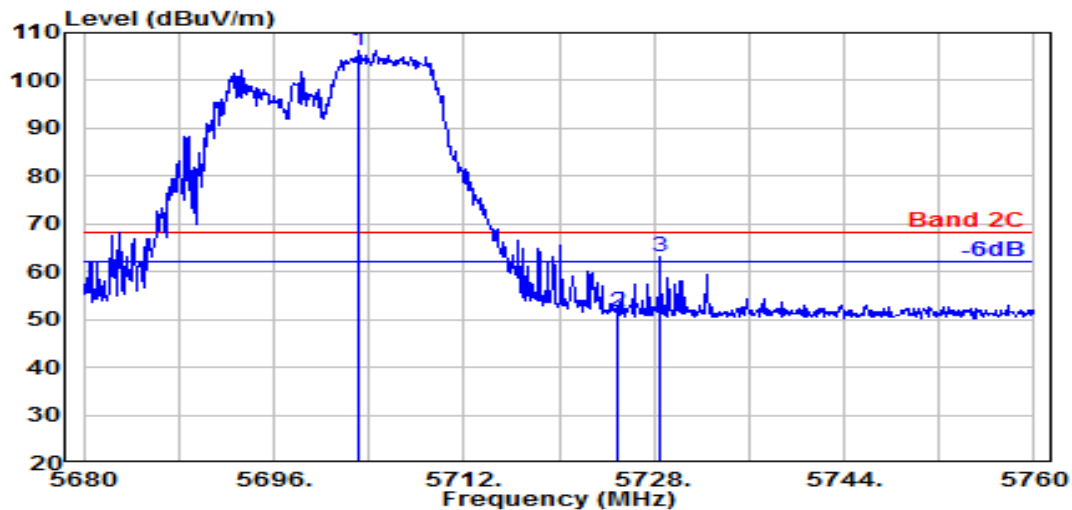


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.040	34.72	9.18	34.30	96.61	106.22	---	---	Peak
5725.000	34.85	9.19	34.31	41.88	51.62	68.20	16.58	Peak
5728.480	34.87	9.20	34.31	53.43	63.19	68.20	5.01	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

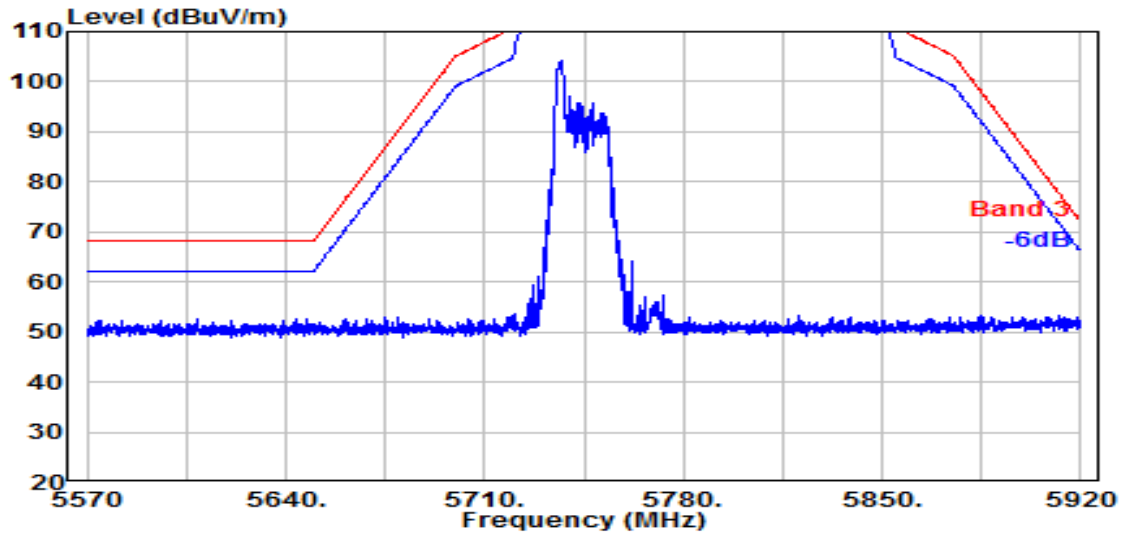


Antenna at Vertical Polarization

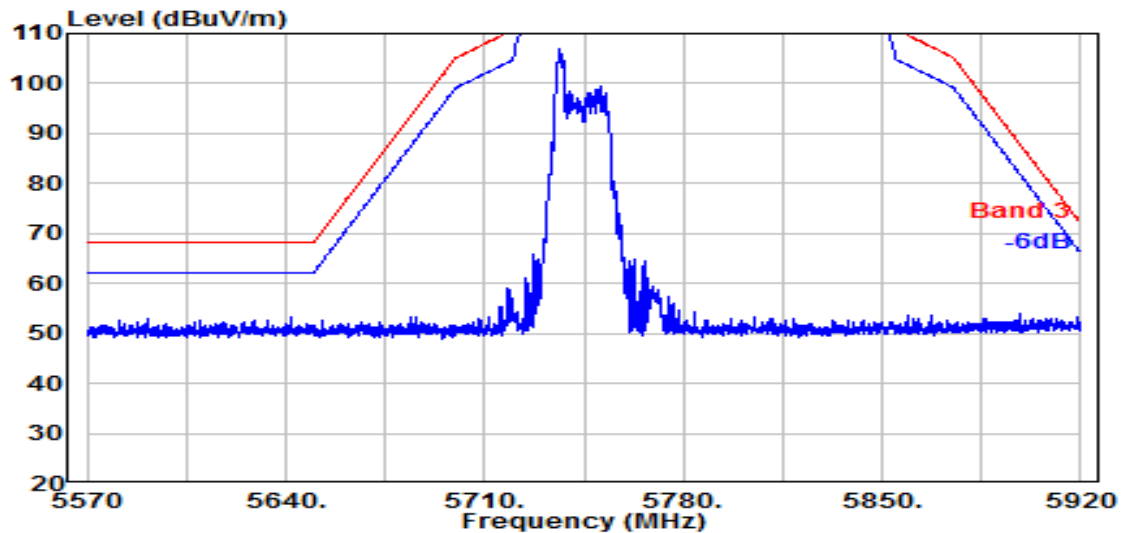


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

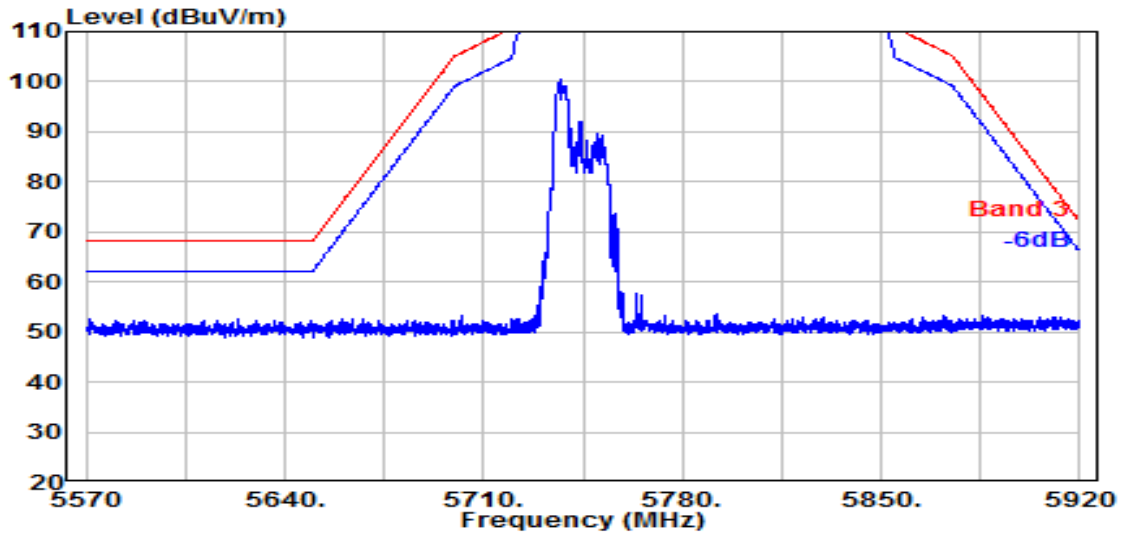


Antenna at Vertical Polarization

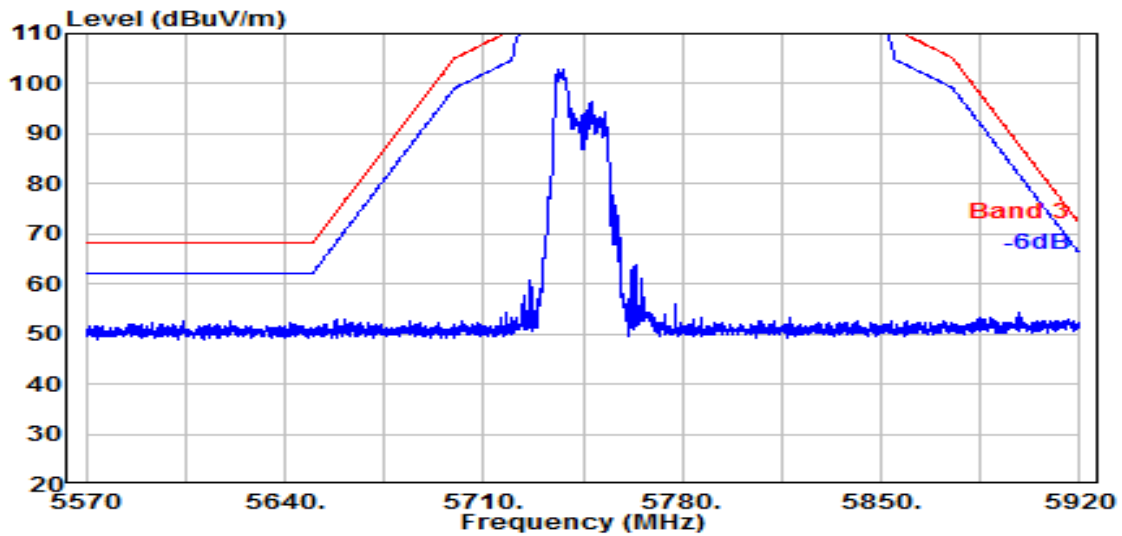


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

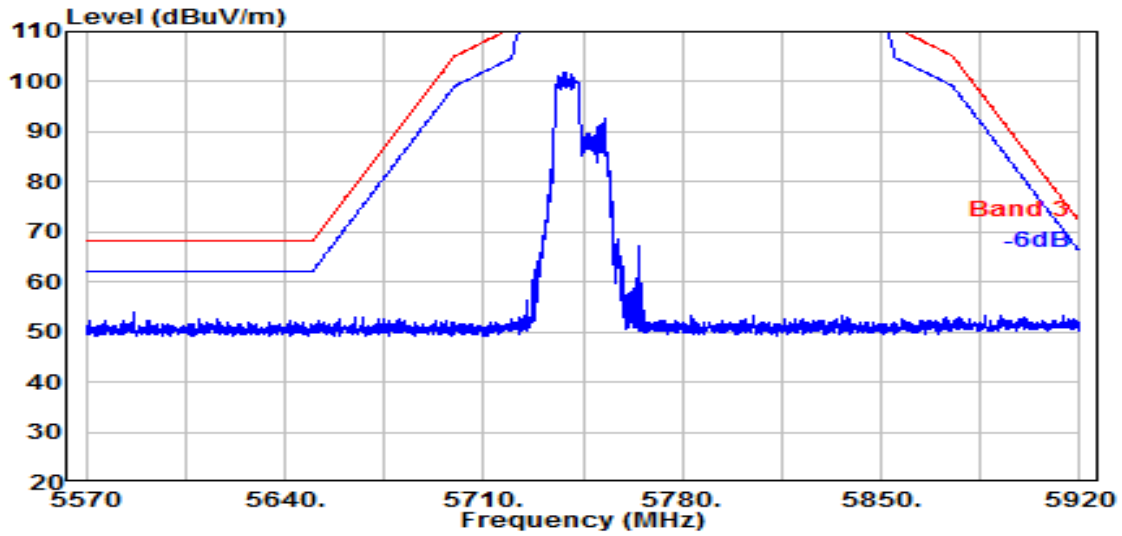


Antenna at Vertical Polarization

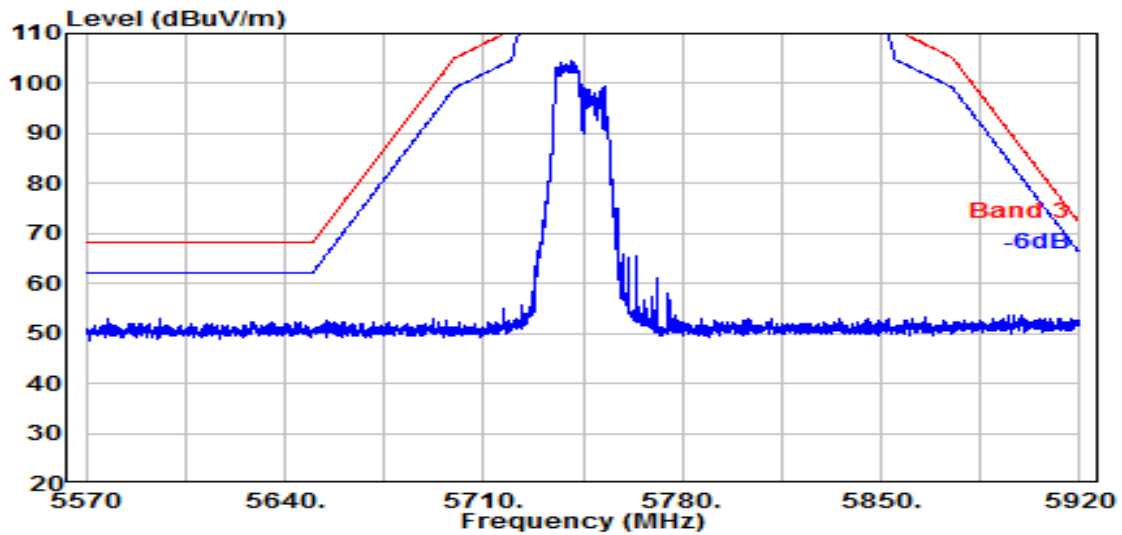


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

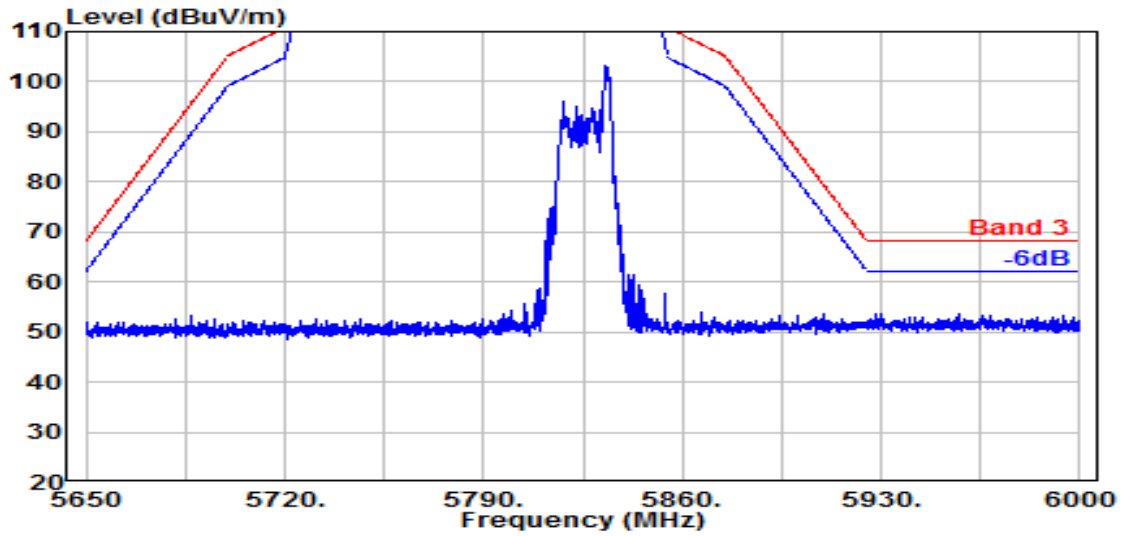


Antenna at Vertical Polarization

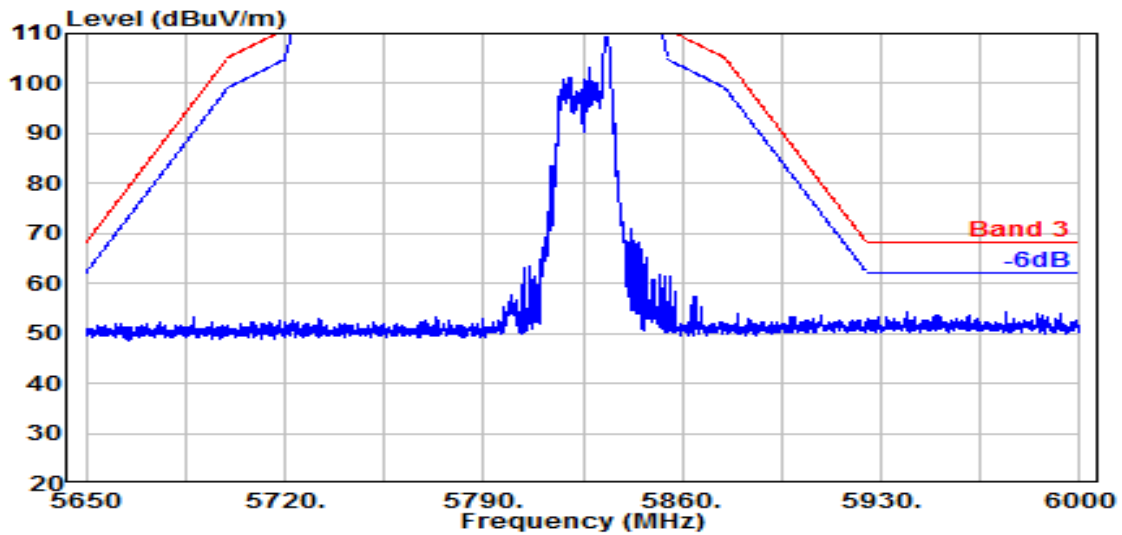


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

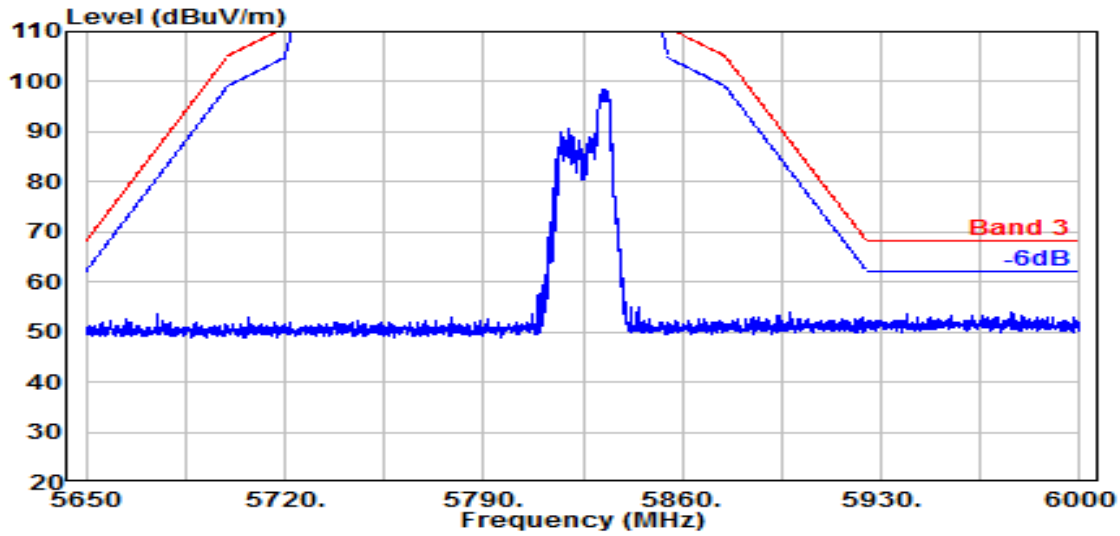


Antenna at Vertical Polarization

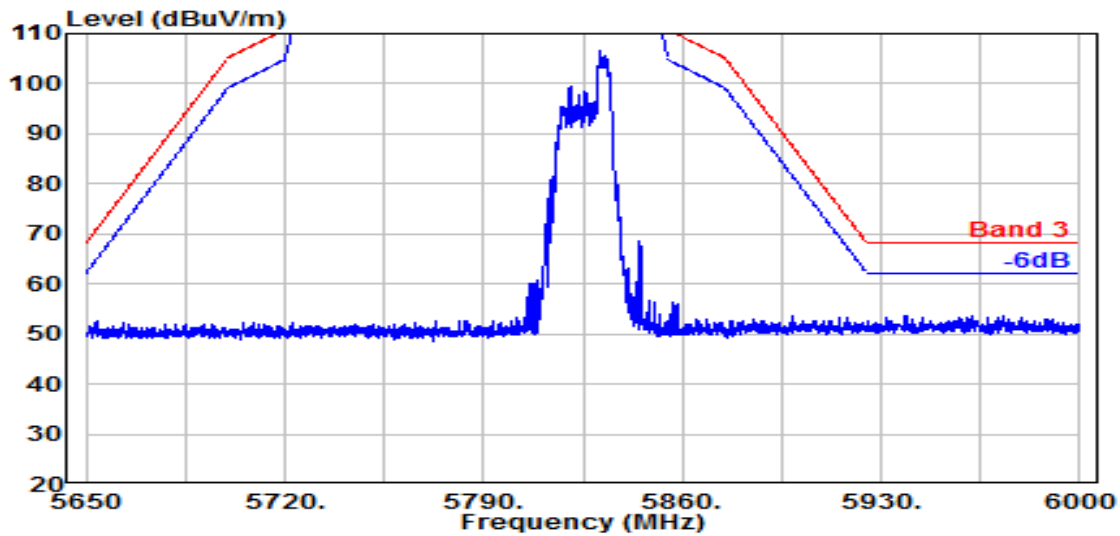


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

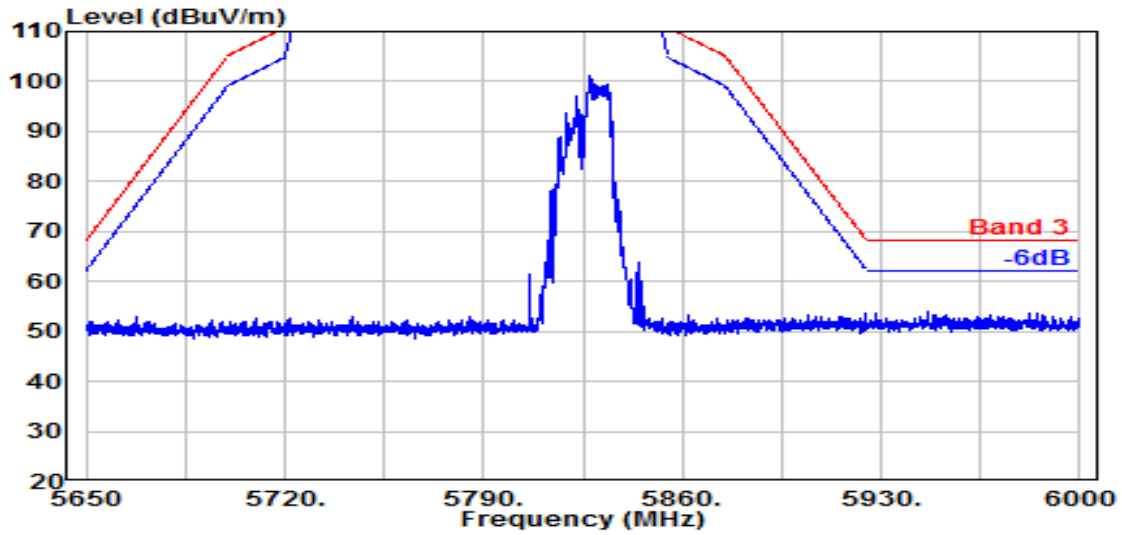

Antenna at Vertical Polarization

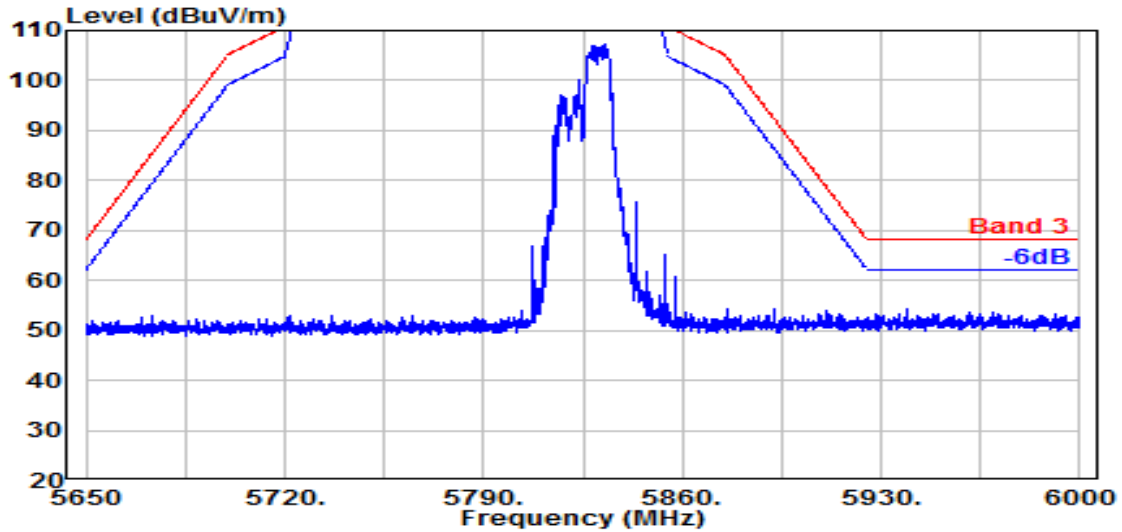


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

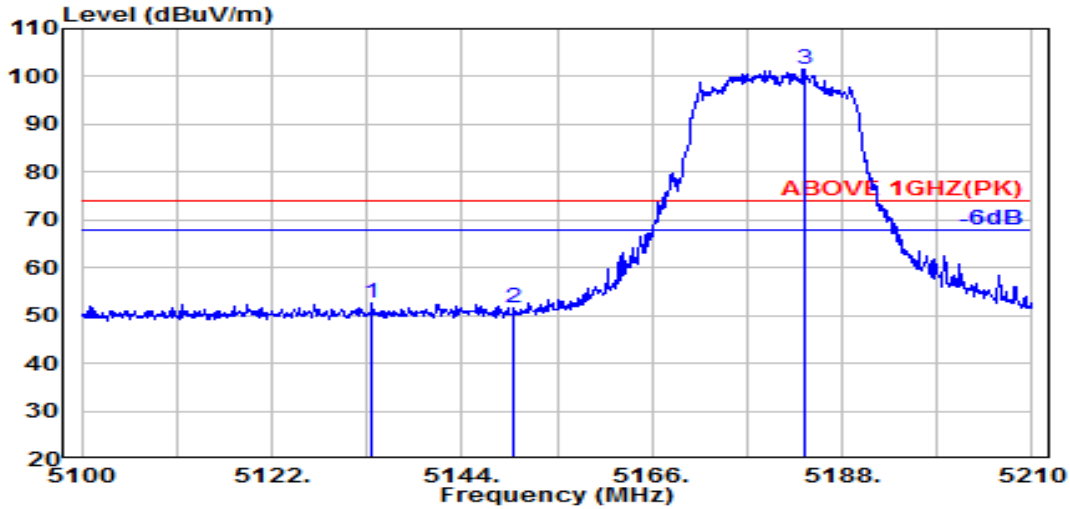

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.550	34.40	8.88	34.34	43.65	52.58	74.00	21.42	Peak
5150.000	34.50	8.89	34.34	42.64	51.68	74.00	22.32	Peak
@ 5183.710	34.64	8.90	34.32	92.43	101.64	---	---	Peak

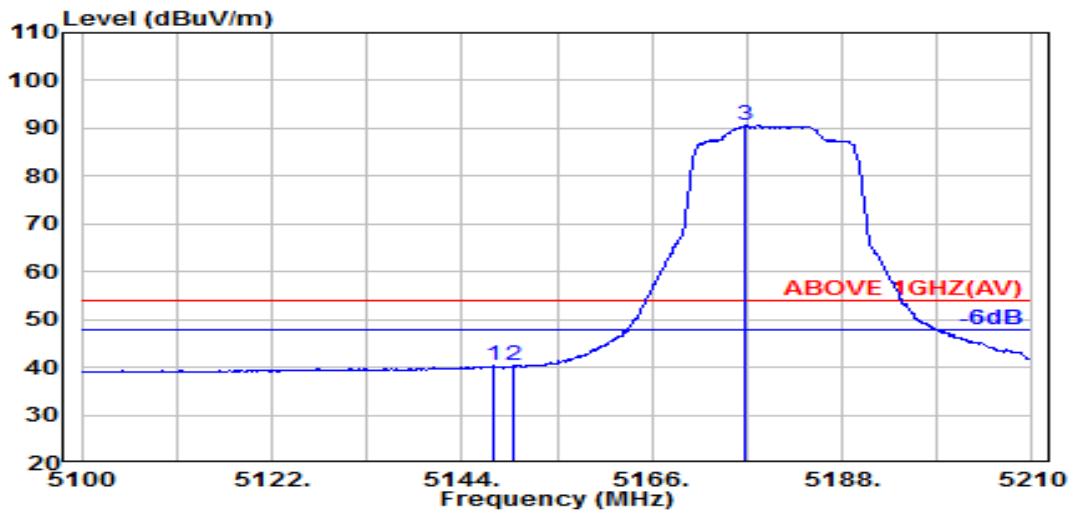


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.740	34.49	8.88	34.34	31.22	40.25	54.00	13.75	Average
5150.000	34.50	8.89	34.34	31.22	40.26	54.00	13.74	Average
@ 5176.890	34.61	8.90	34.33	81.52	90.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

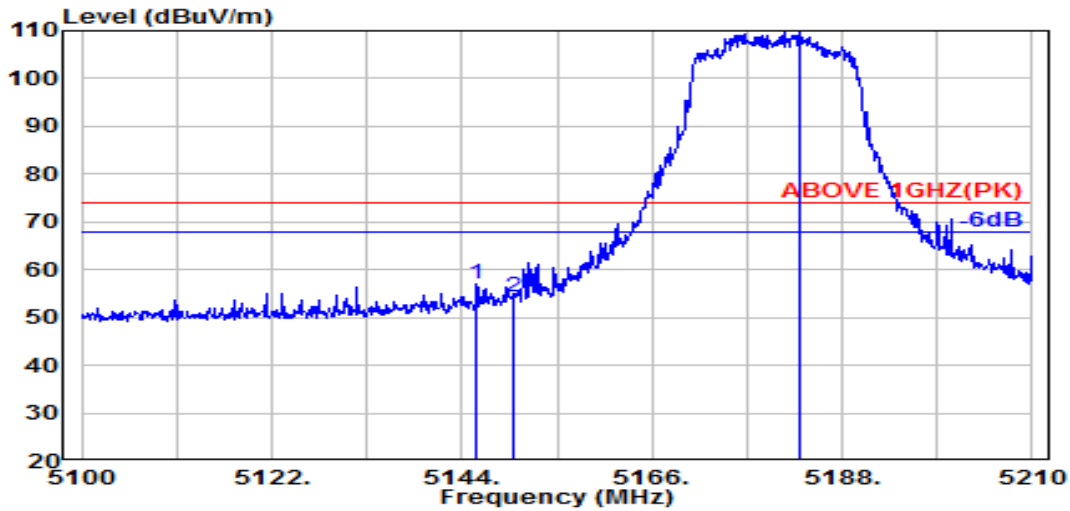

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.760	34.47	8.88	34.34	48.00	57.02	74.00	16.98	Peak
5150.000	34.50	8.89	34.34	45.20	54.25	74.00	19.75	Peak
@ 5183.050	34.63	8.90	34.32	100.84	110.05	---	---	Peak

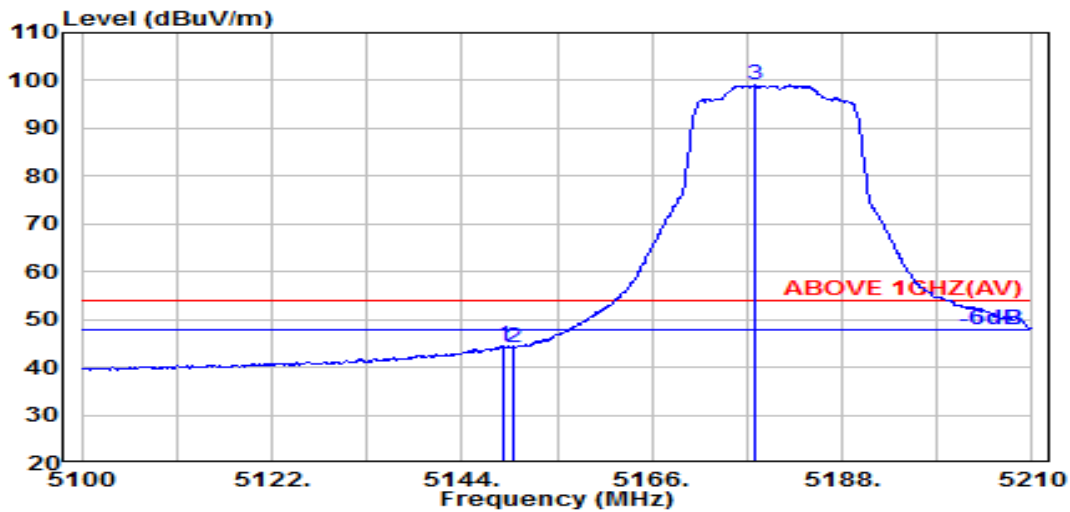


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	34.49	8.89	34.34	35.43	44.47	54.00	9.53	Average
5150.000	34.50	8.89	34.34	35.10	44.15	54.00	9.85	Average
@ 5177.880	34.61	8.90	34.33	89.80	98.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

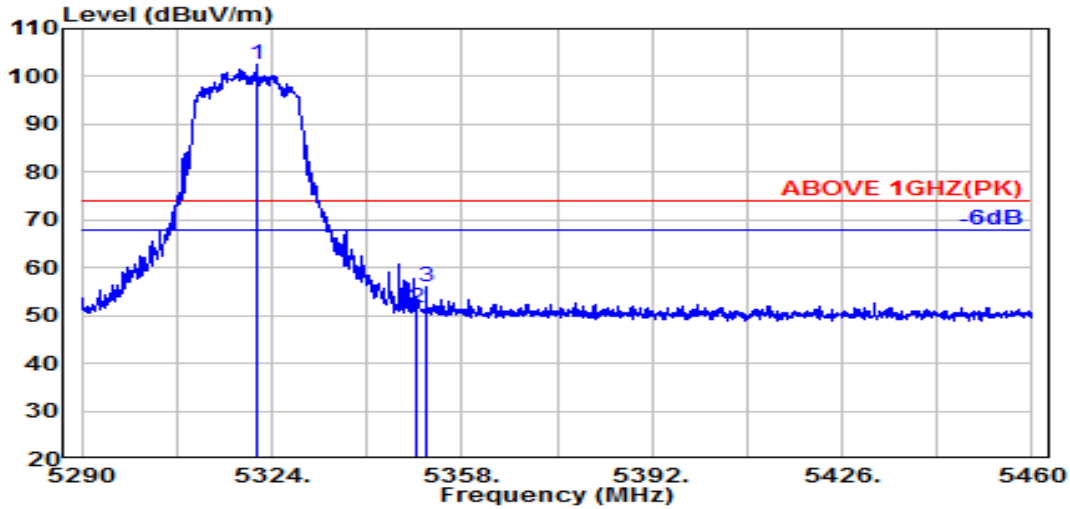

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.300	34.61	8.98	34.27	93.07	102.40	---	---	Peak
5350.000	34.90	9.00	34.26	41.80	51.44	74.00	22.56	Peak
5351.700	34.90	9.00	34.26	46.25	55.89	74.00	18.11	Peak

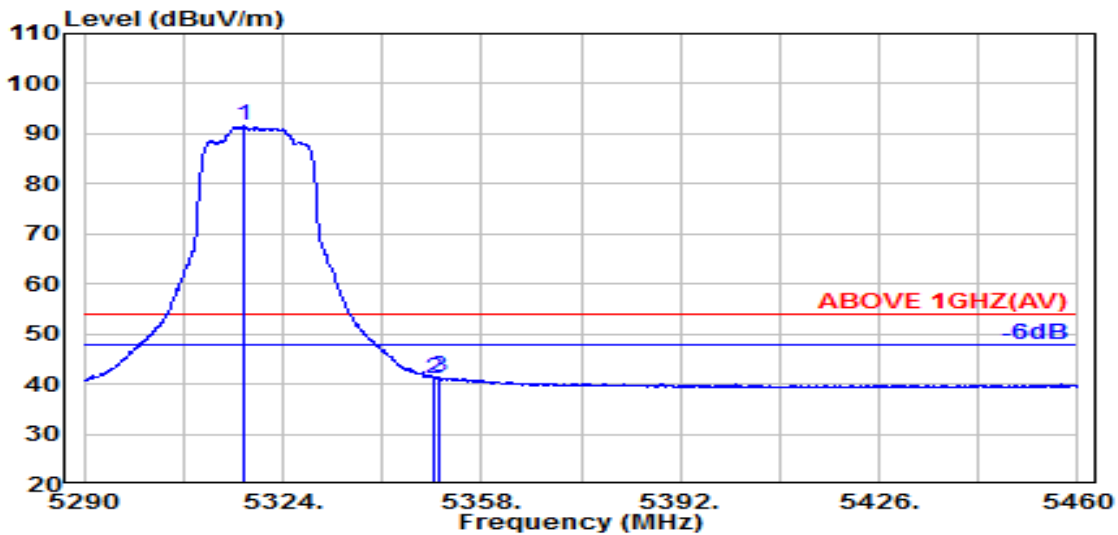


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	34.57	8.98	34.27	82.22	91.50	---	---	Average
5350.000	34.90	9.00	34.26	31.51	41.15	54.00	12.85	Average
5350.600	34.90	9.00	34.26	31.61	41.25	54.00	12.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

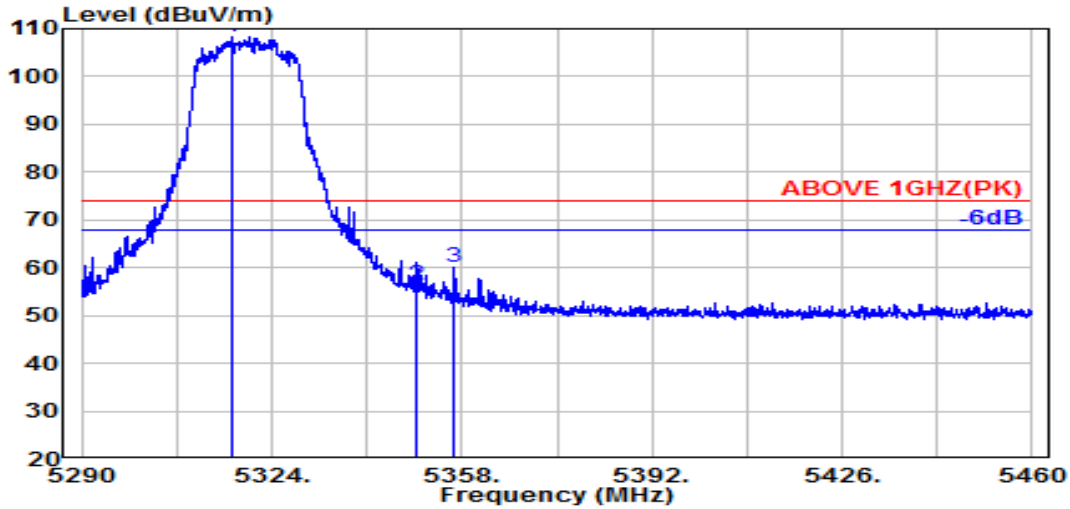

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.57	8.98	34.27	99.17	108.45	---	---	Peak
5350.000	34.90	9.00	34.26	46.85	56.49	74.00	17.51	Peak
5356.700	34.89	9.00	34.26	50.44	60.07	74.00	13.93	Peak

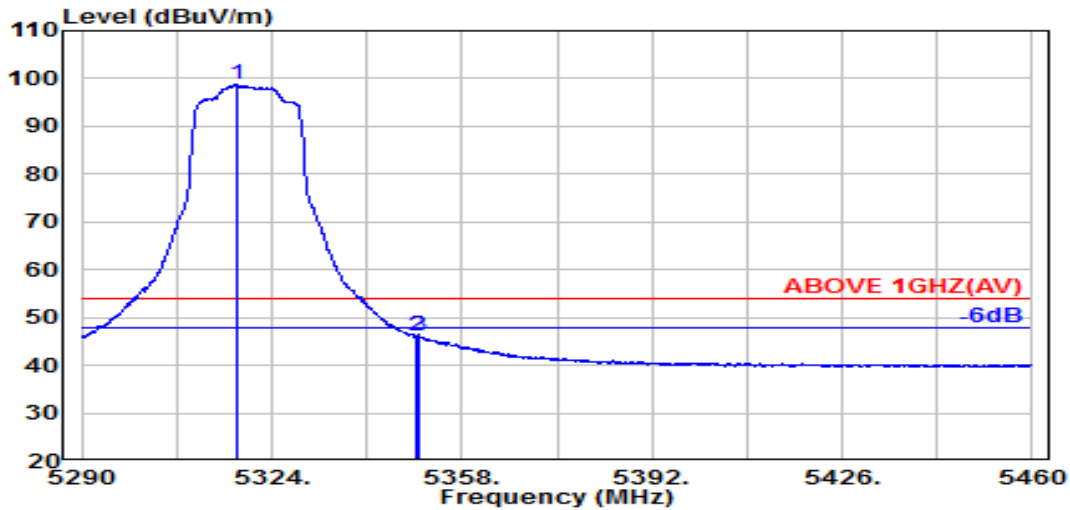


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.900	34.58	8.98	34.27	89.52	98.81	---	---	Average
5350.000	34.90	9.00	34.26	36.58	46.22	54.00	7.78	Average
5350.500	34.90	9.00	34.26	36.38	46.02	54.00	7.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

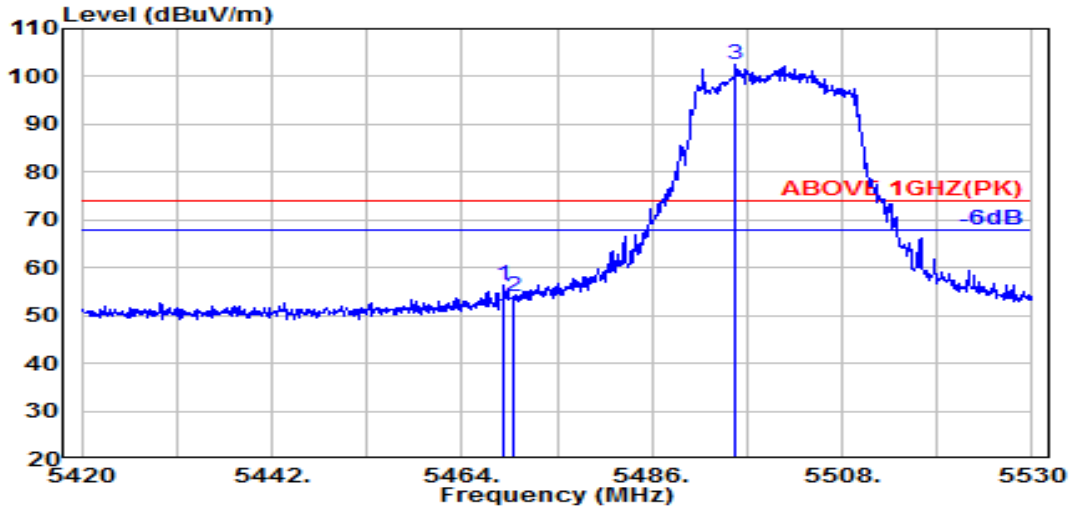

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.64	9.06	34.21	47.00	56.48	74.00	17.52	Peak
5470.000	34.64	9.06	34.21	44.35	53.84	74.00	20.16	Peak
@ 5495.700	34.69	9.07	34.20	93.08	102.65	---	---	Peak

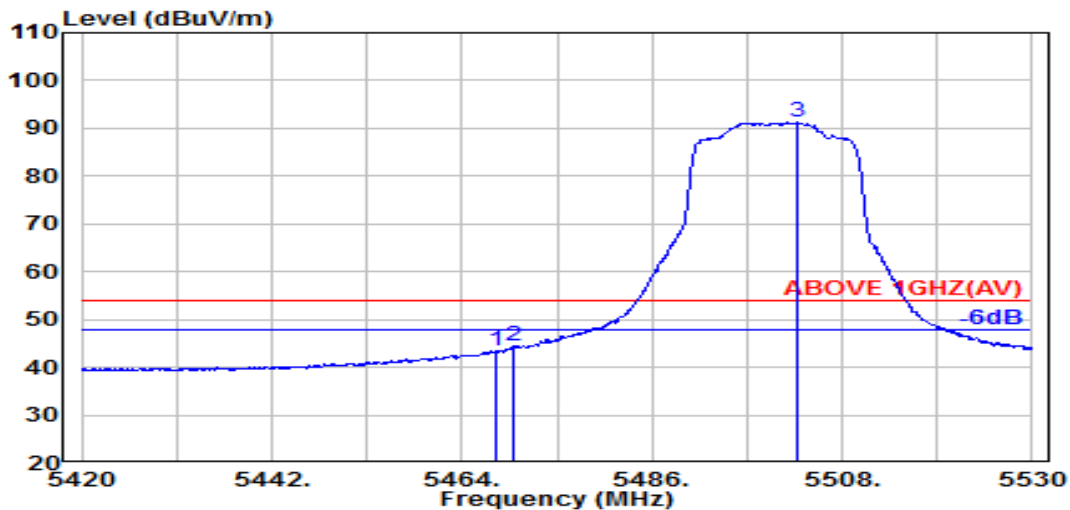


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.64	9.06	34.21	33.97	43.46	54.00	10.54	Average
5470.000	34.64	9.06	34.21	34.89	44.38	54.00	9.62	Average
@ 5502.900	34.70	9.08	34.20	81.68	91.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

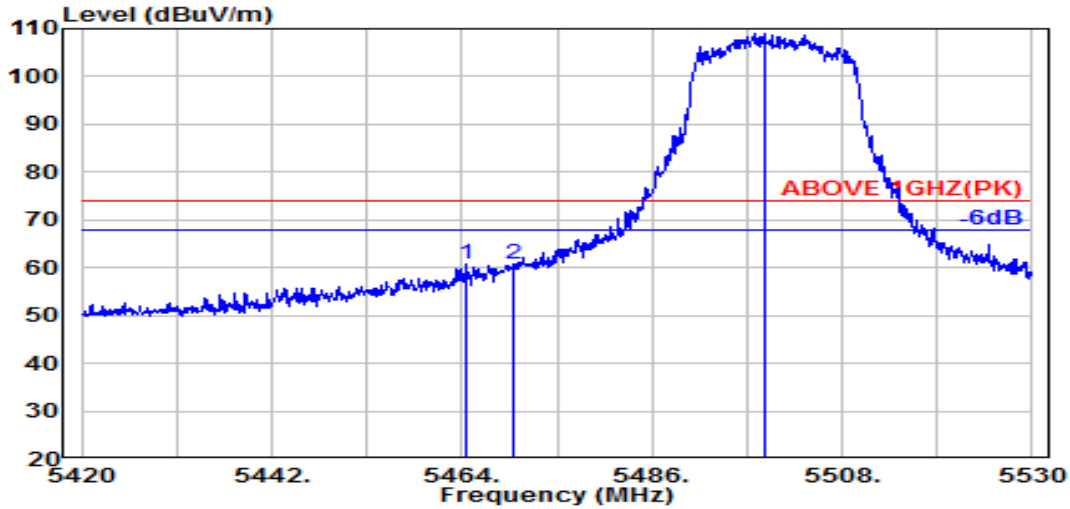

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.63	9.06	34.21	51.30	60.77	74.00	13.23	Peak
5470.000	34.64	9.06	34.21	51.37	60.86	74.00	13.14	Peak
@ 5499.100	34.70	9.08	34.20	99.29	108.86	---	---	Peak

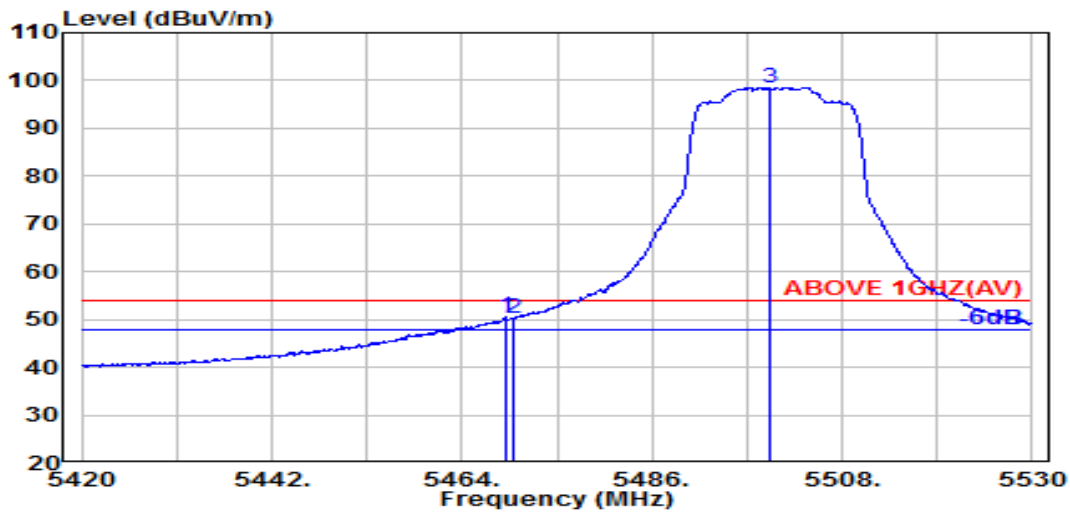


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	40.99	50.48	54.00	3.52	Average
5470.000	34.64	9.06	34.21	40.71	50.20	54.00	3.80	Average
@ 5499.600	34.70	9.08	34.20	88.98	98.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

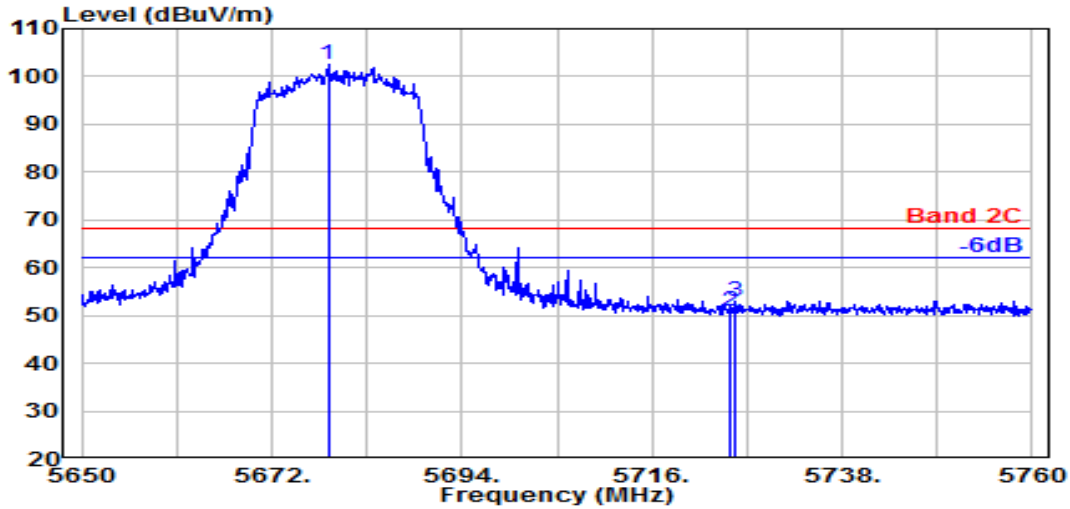

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.500	34.61	9.17	34.28	92.90	102.40	---	---	Peak
5725.000	34.85	9.19	34.31	41.18	50.92	68.20	17.28	Peak
5725.700	34.85	9.19	34.31	43.25	53.00	68.20	15.20	Peak

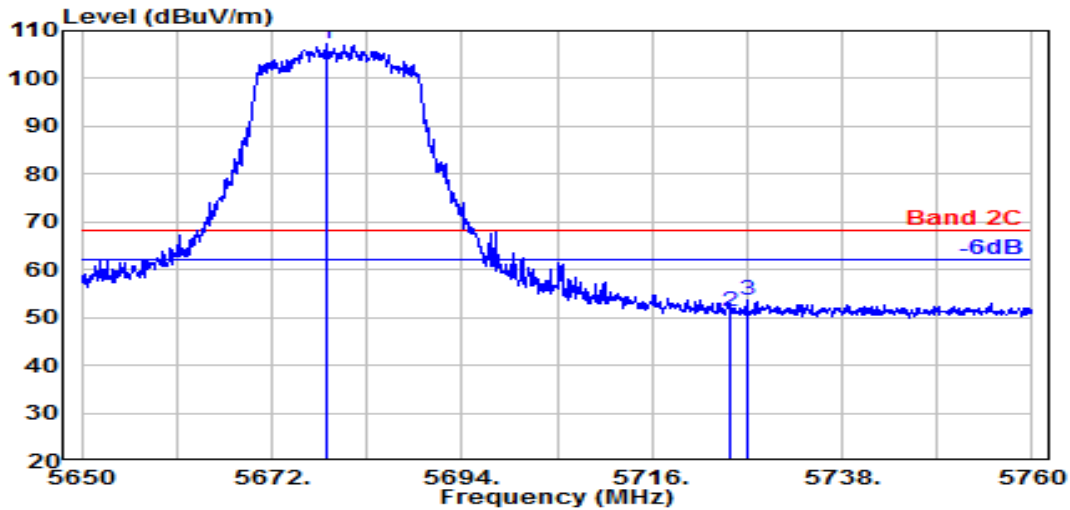


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.300	34.61	9.17	34.28	97.90	107.40	---	---	Peak
5725.000	34.85	9.19	34.31	41.62	51.36	68.20	16.84	Peak
5727.000	34.86	9.19	34.31	44.00	53.75	68.20	14.45	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

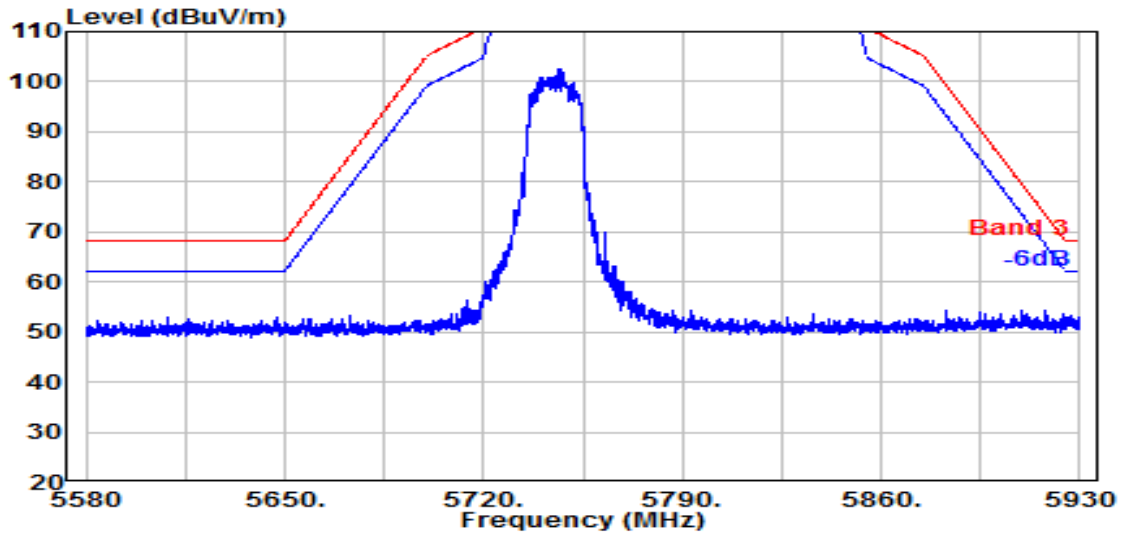


Antenna at Vertical Polarization

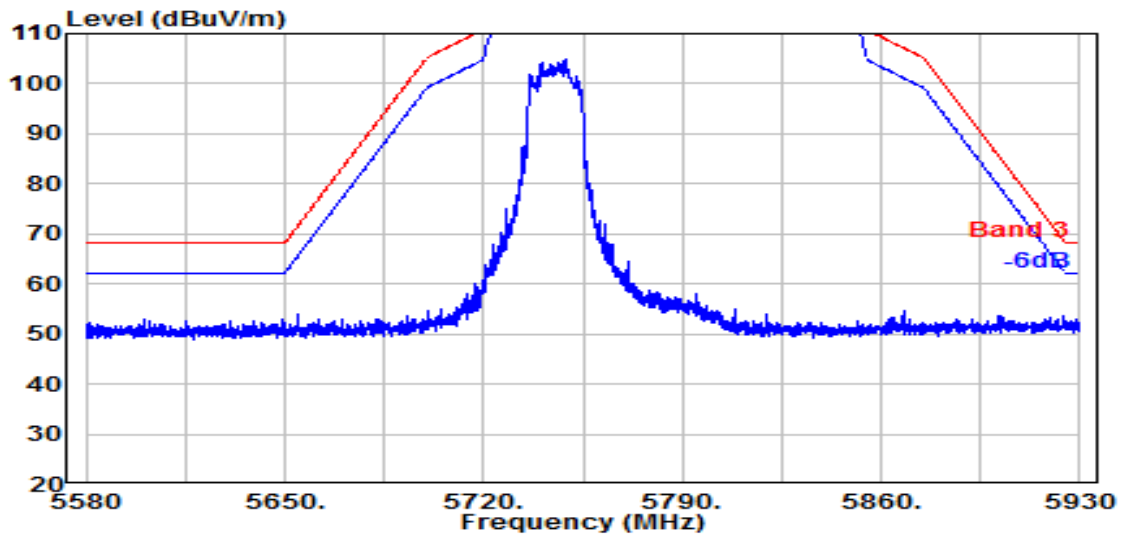


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

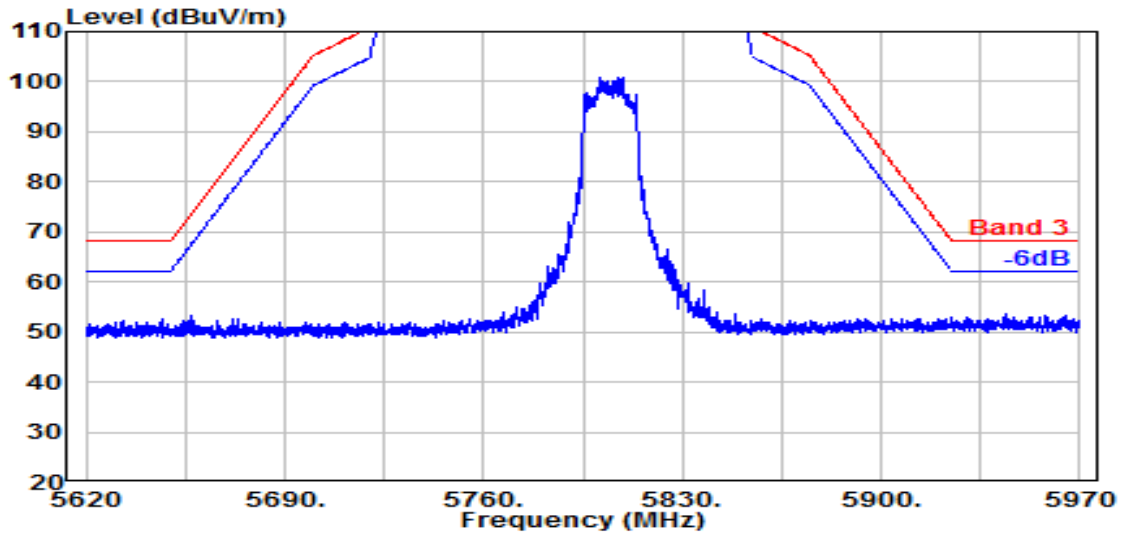

Antenna at Vertical Polarization

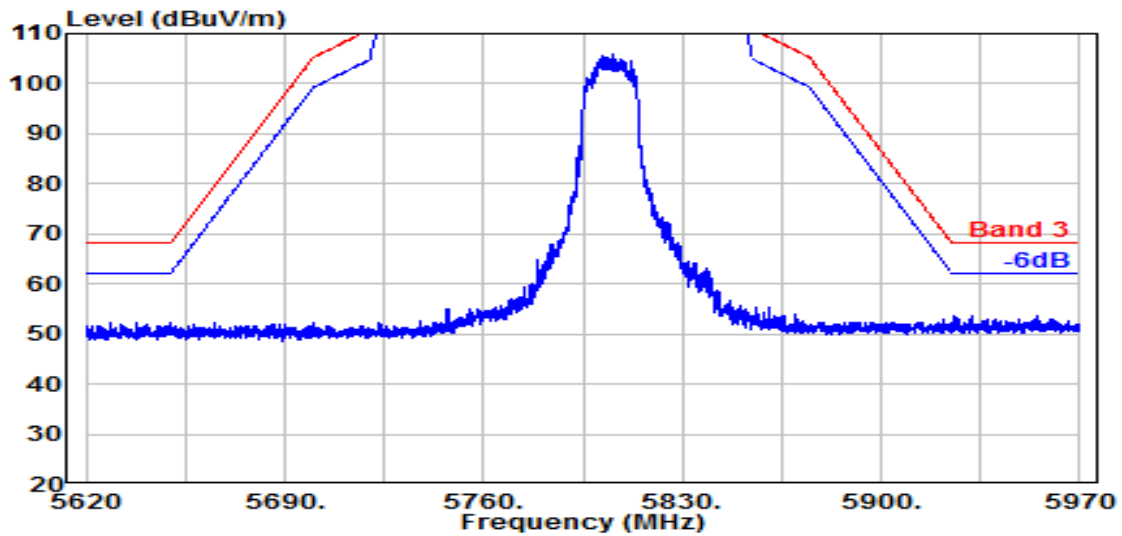


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

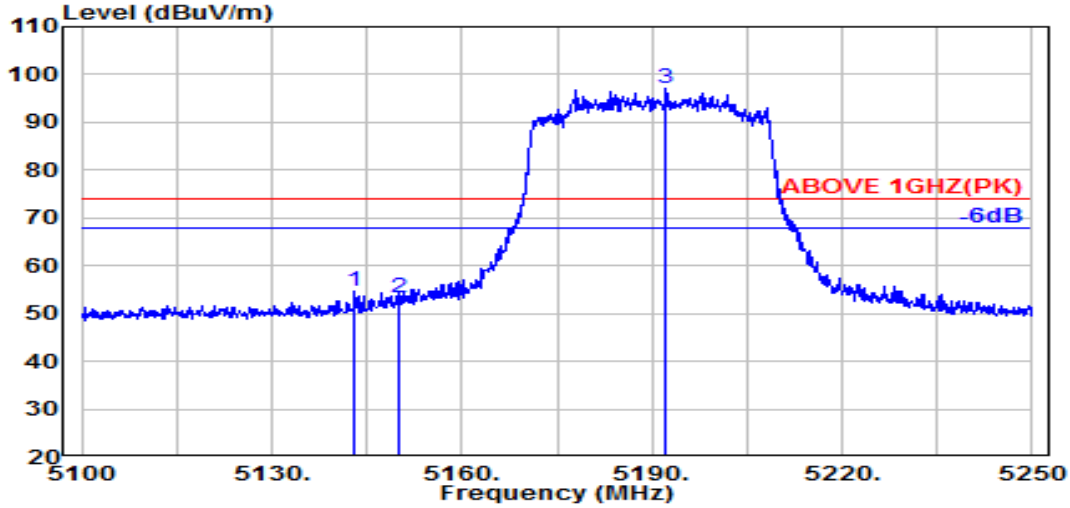

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.100	34.46	8.88	34.34	45.56	54.56	74.00	19.44	Peak
5150.000	34.50	8.89	34.34	44.07	53.12	74.00	20.88	Peak
@ 5192.200	34.67	8.91	34.32	87.75	97.01	---	---	Peak

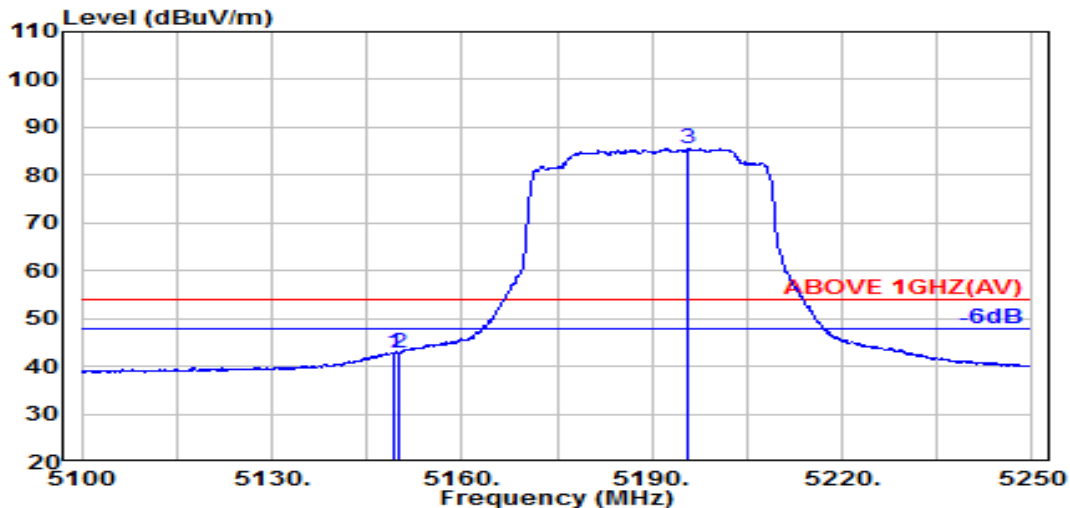


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.49	8.89	34.34	33.76	42.80	54.00	11.20	Average
5150.000	34.50	8.89	34.34	33.84	42.89	54.00	11.11	Average
@ 5195.800	34.68	8.91	34.32	76.25	85.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

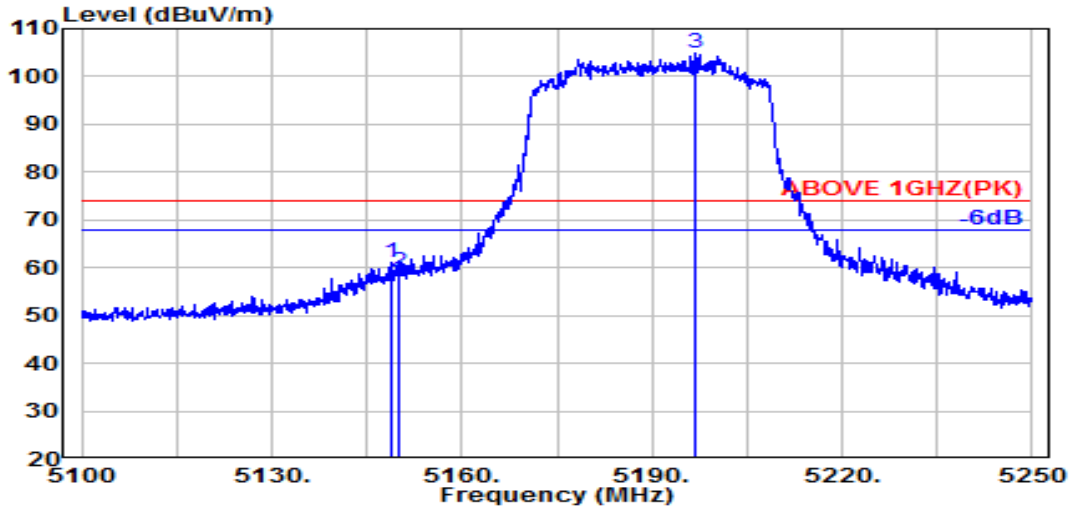

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	34.49	8.89	34.34	52.12	61.16	74.00	12.84	Peak
5150.000	34.50	8.89	34.34	49.94	58.99	74.00	15.01	Peak
@ 5196.800	34.69	8.91	34.32	95.57	104.85	---	---	Peak

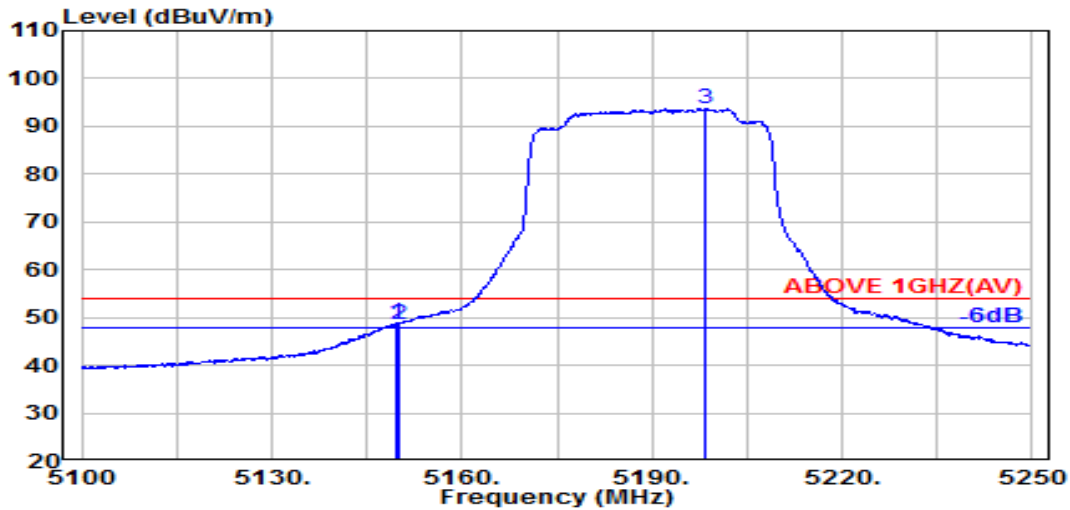


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	39.68	48.72	54.00	5.28	Average
5150.000	34.50	8.89	34.34	39.49	48.54	54.00	5.46	Average
@ 5198.500	34.69	8.91	34.32	84.41	93.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

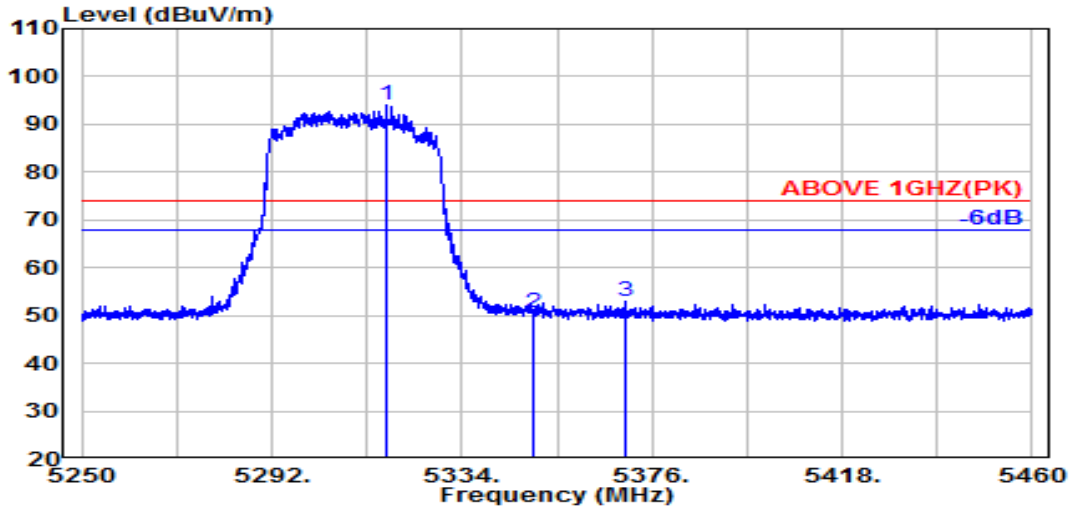

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	34.57	8.98	34.27	84.78	94.06	---	---	Peak
5350.000	34.90	9.00	34.26	41.02	50.66	74.00	23.34	Peak
5369.900	34.86	9.01	34.25	43.19	52.80	74.00	21.20	Peak

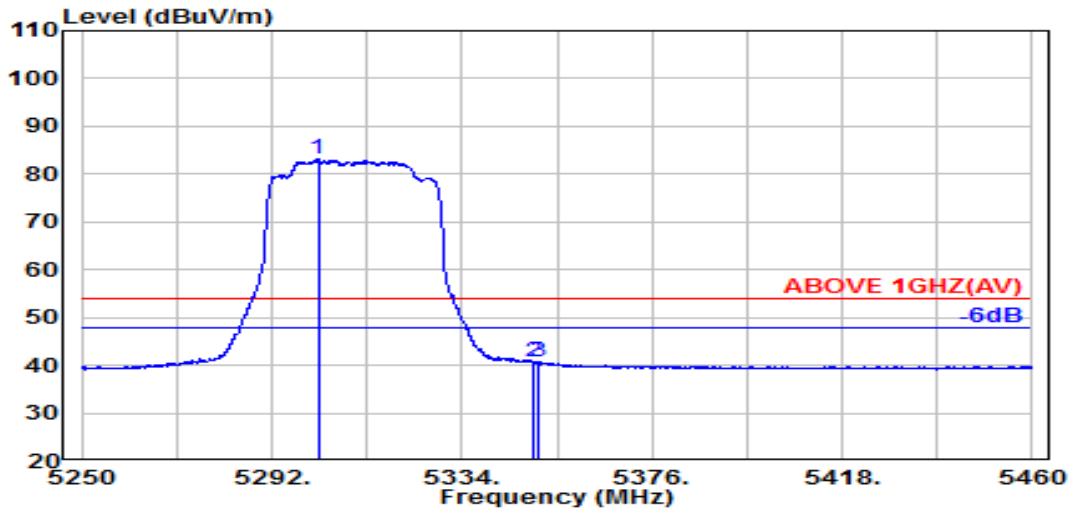


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.200	34.42	8.97	34.28	74.07	83.19	---	---	Average
5350.000	34.90	9.00	34.26	30.98	40.62	54.00	13.38	Average
5350.900	34.90	9.00	34.26	31.05	40.69	54.00	13.31	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

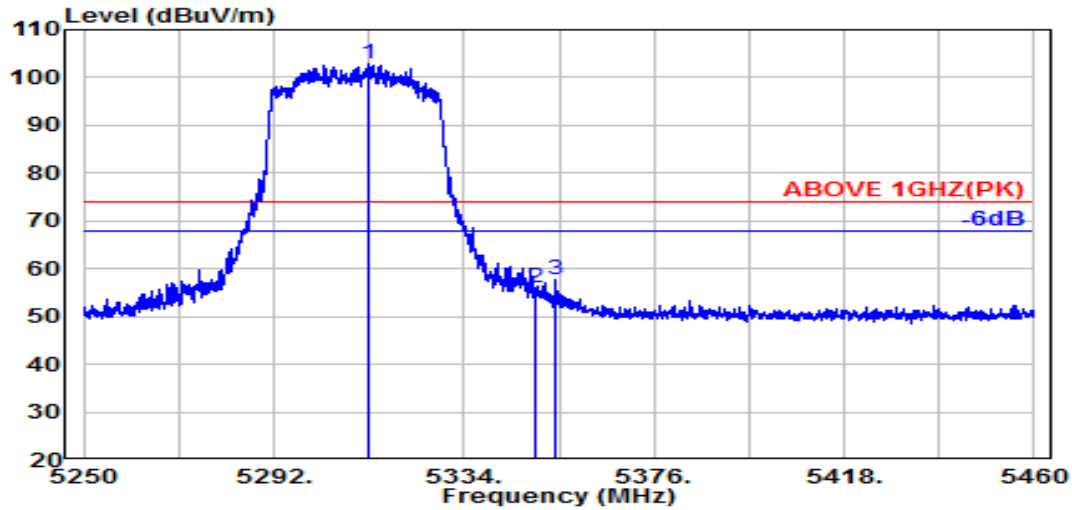

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.000	34.53	8.98	34.27	93.70	102.93	---	---	Peak
5350.000	34.90	9.00	34.26	46.49	56.13	74.00	17.87	Peak
5354.000	34.89	9.00	34.26	48.08	57.71	74.00	16.29	Peak

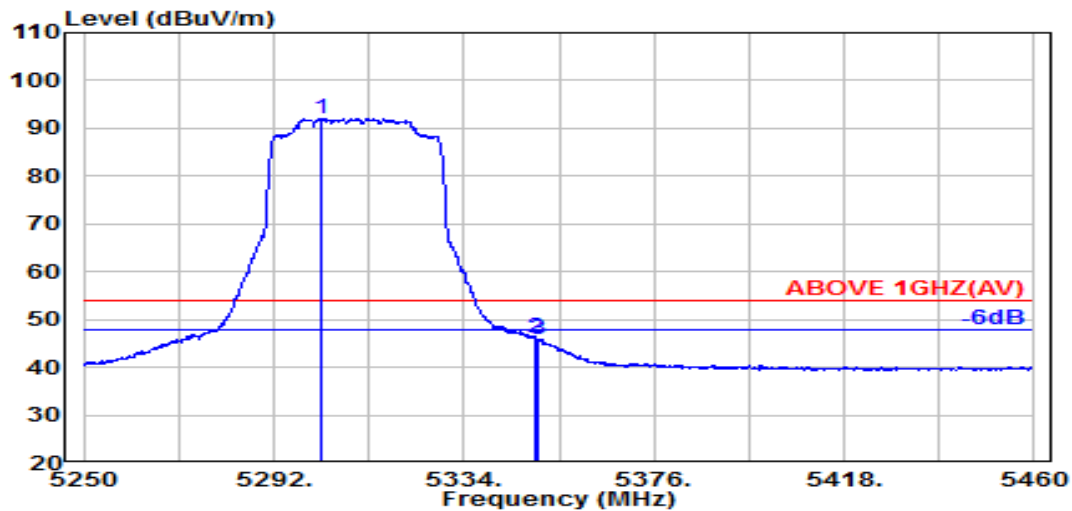


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.400	34.42	8.97	34.28	83.04	92.16	---	---	Average
5350.000	34.90	9.00	34.26	36.35	45.99	54.00	8.01	Average
5350.500	34.90	9.00	34.26	36.22	45.86	54.00	8.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

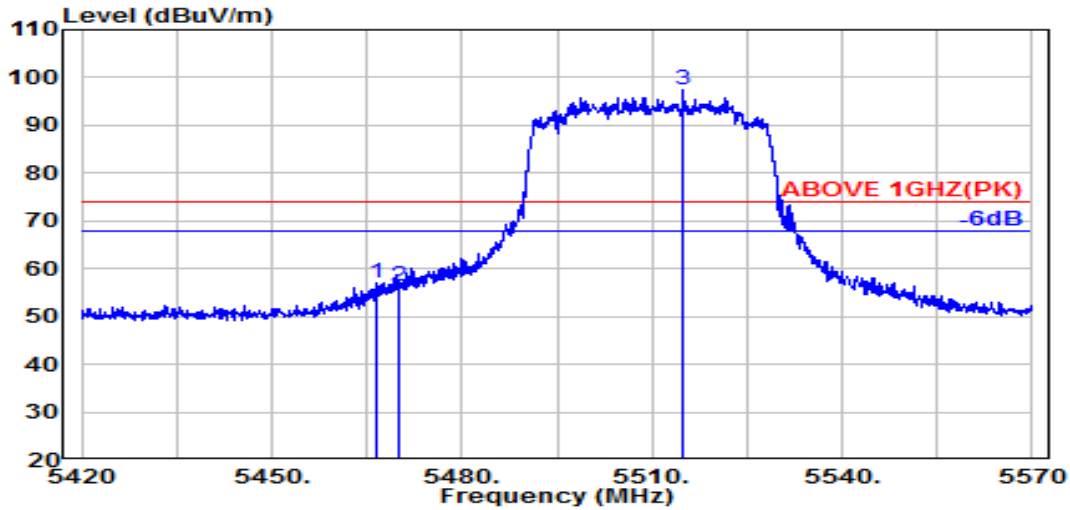

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.63	9.06	34.21	47.58	57.06	74.00	16.94	Peak
5470.000	34.64	9.06	34.21	46.85	56.34	74.00	17.66	Peak
@ 5515.000	34.70	9.08	34.21	87.91	97.49	---	---	Peak

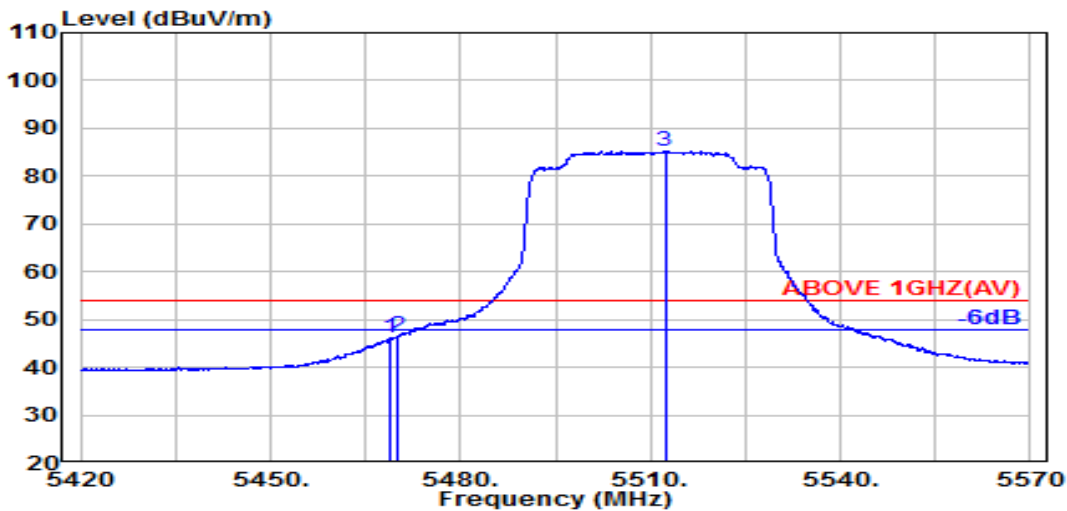


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.64	9.06	34.21	36.61	46.10	54.00	7.90	Average
5470.000	34.64	9.06	34.21	36.93	46.42	54.00	7.58	Average
@ 5512.300	34.70	9.08	34.21	75.63	85.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

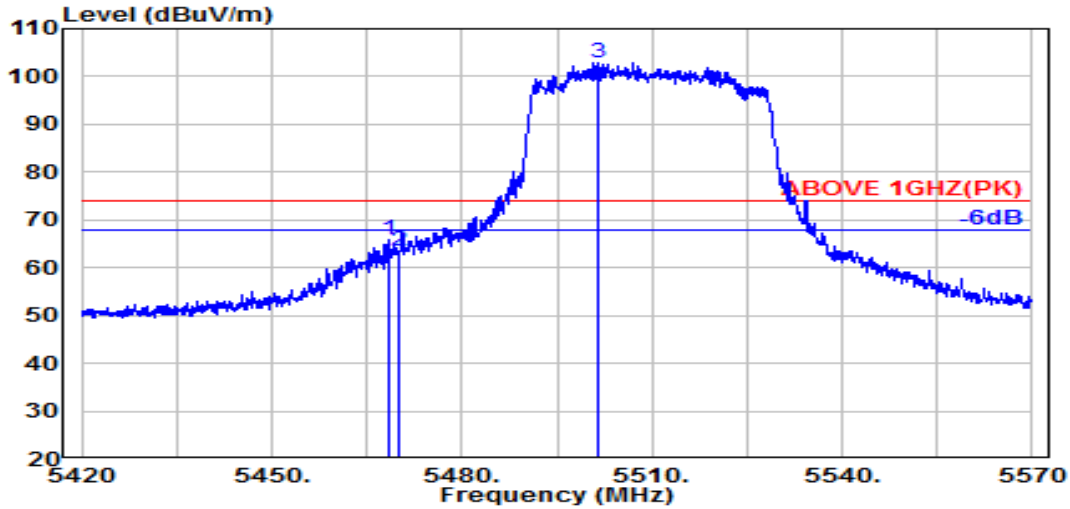

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.64	9.06	34.21	56.24	65.73	74.00	8.27	Peak
5470.000	34.64	9.06	34.21	53.86	63.35	74.00	10.65	Peak
@ 5501.600	34.70	9.08	34.20	93.46	103.03	---	---	Peak

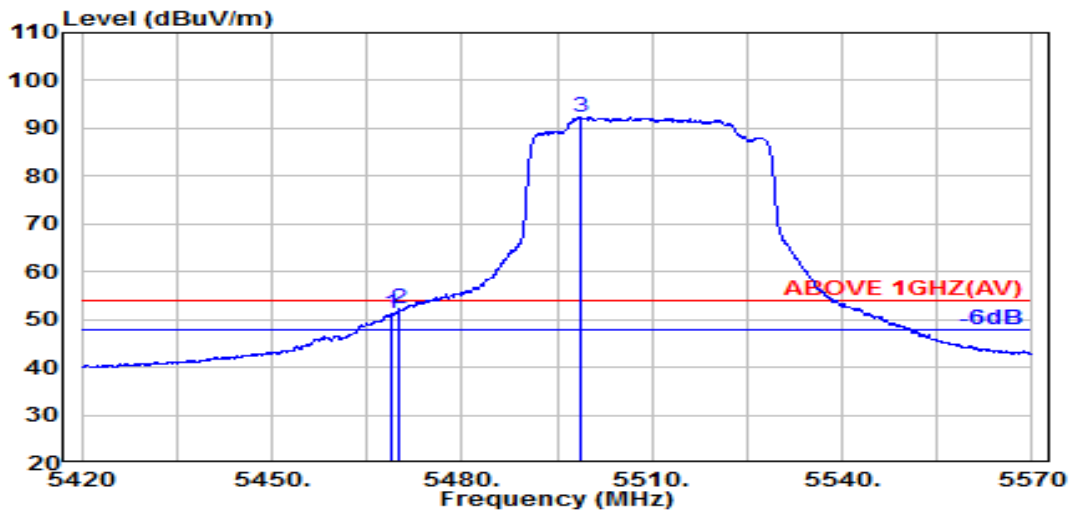


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	41.77	51.25	54.00	2.75	Average
5470.000	34.64	9.06	34.21	42.69	52.18	54.00	1.82	Average
@ 5498.600	34.70	9.08	34.20	82.75	92.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

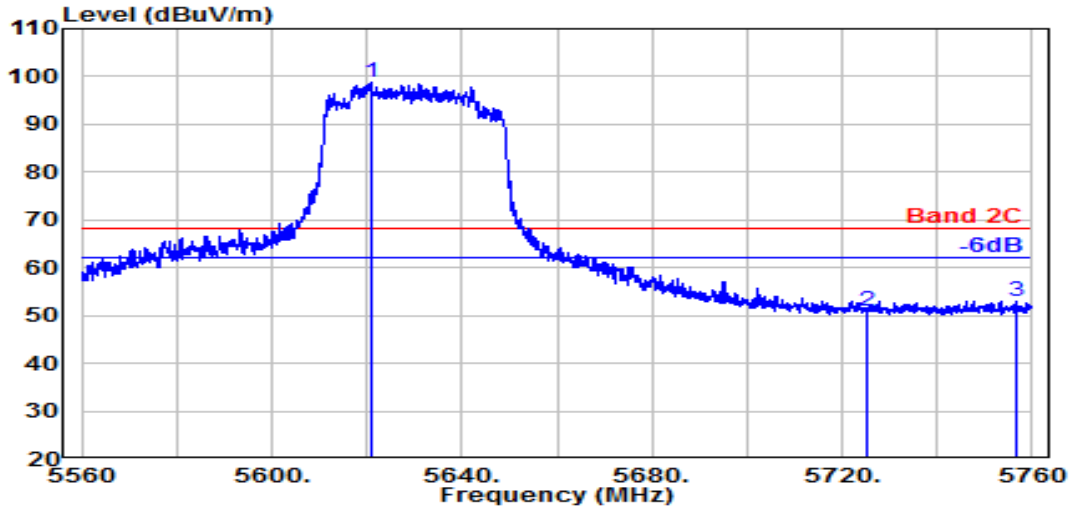

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5620.900	34.44	9.14	34.26	89.57	98.89	---	---	Peak
5725.000	34.85	9.19	34.31	41.02	50.76	68.20	17.44	Peak
5756.700	35.01	9.21	34.32	43.10	53.00	68.20	15.20	Peak

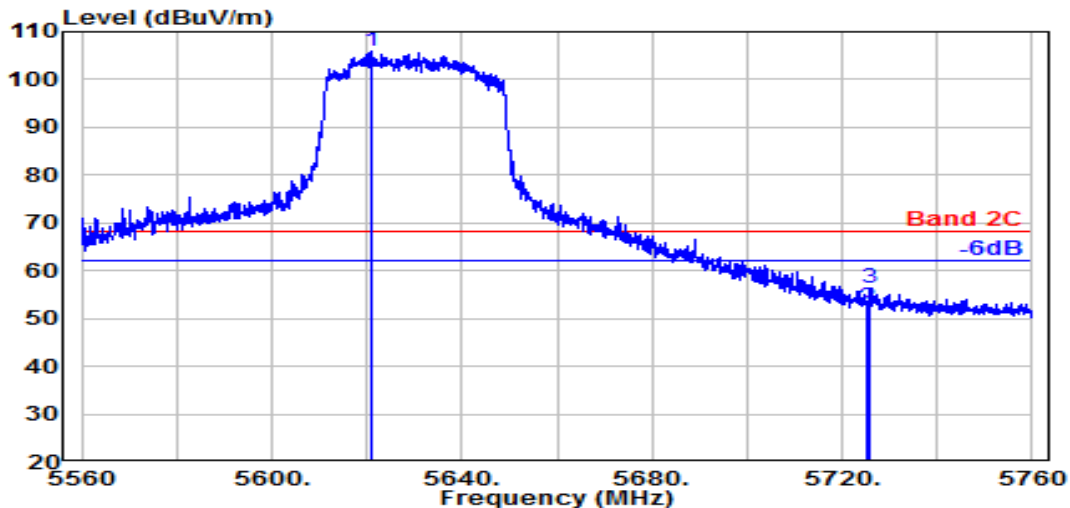


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5621.200	34.44	9.14	34.26	96.70	106.03	---	---	Peak
5725.000	34.85	9.19	34.31	42.57	52.31	68.20	15.89	Peak
5725.700	34.85	9.19	34.31	46.65	56.39	68.20	11.81	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

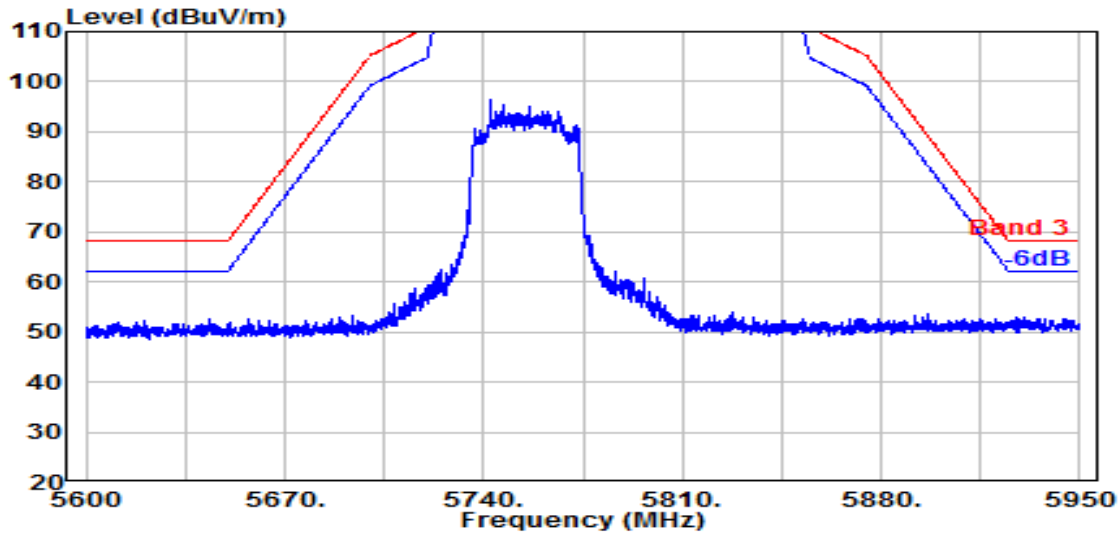


Antenna at Vertical Polarization

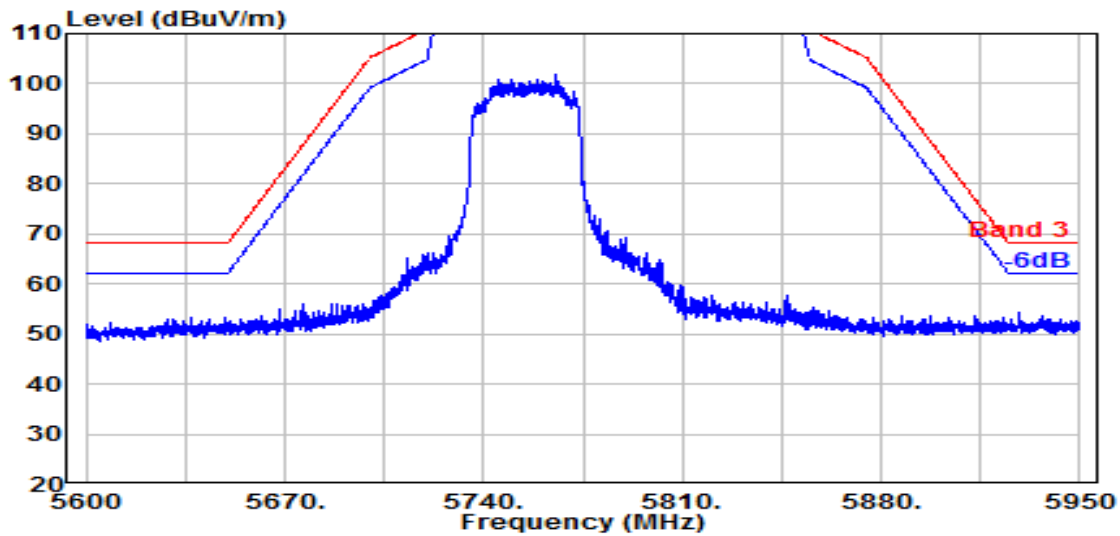


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

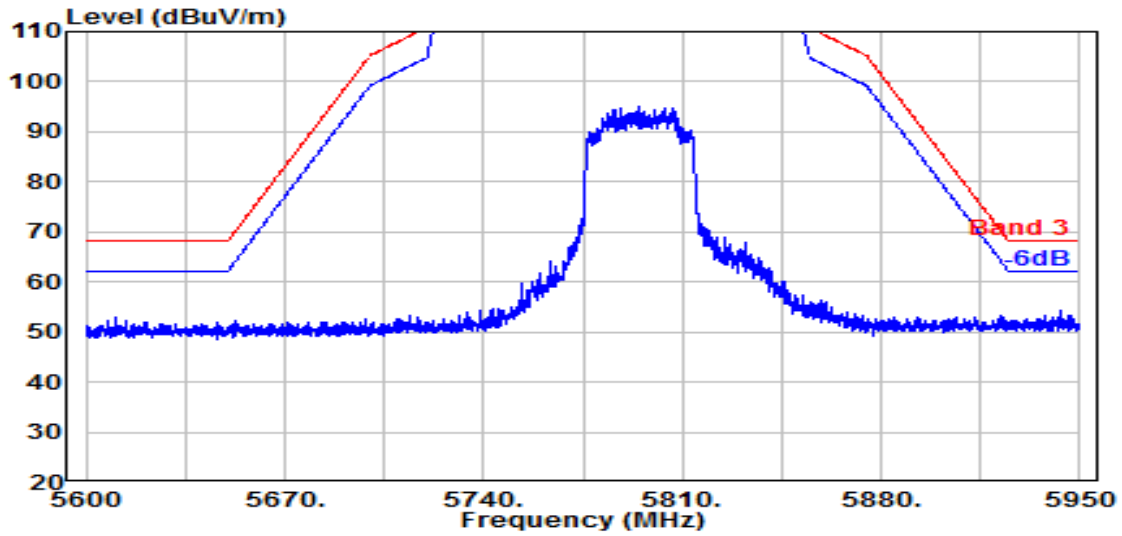

Antenna at Vertical Polarization

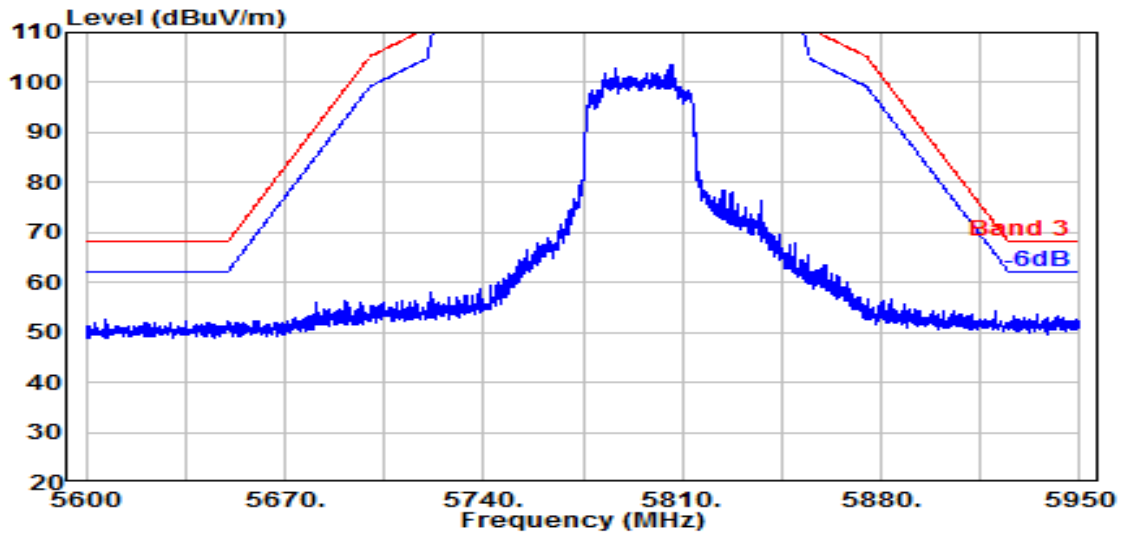


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

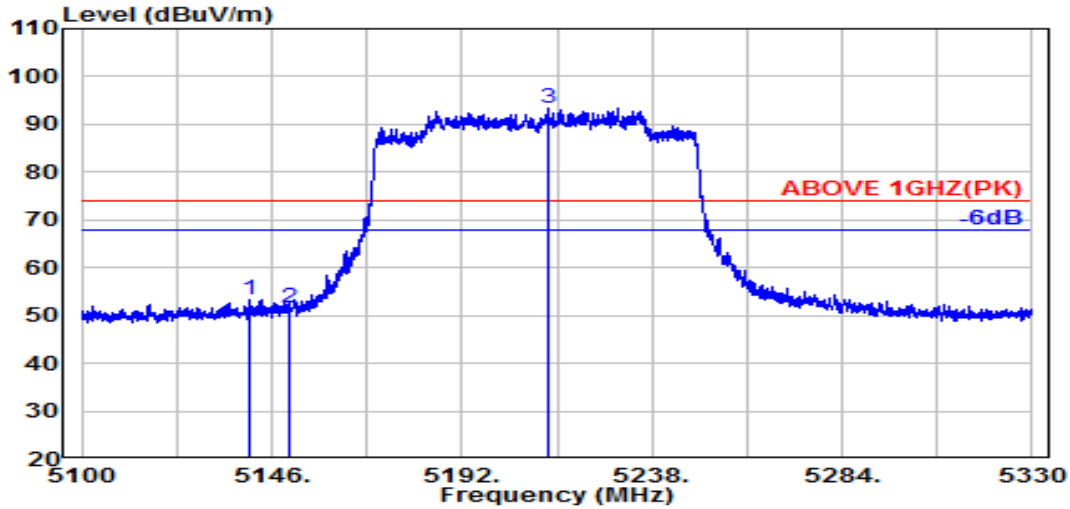

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.800	34.45	8.88	34.34	44.28	53.27	74.00	20.73	Peak
5150.000	34.50	8.89	34.34	42.42	51.47	74.00	22.53	Peak
@ 5212.700	34.65	8.92	34.31	84.27	93.52	---	---	Peak

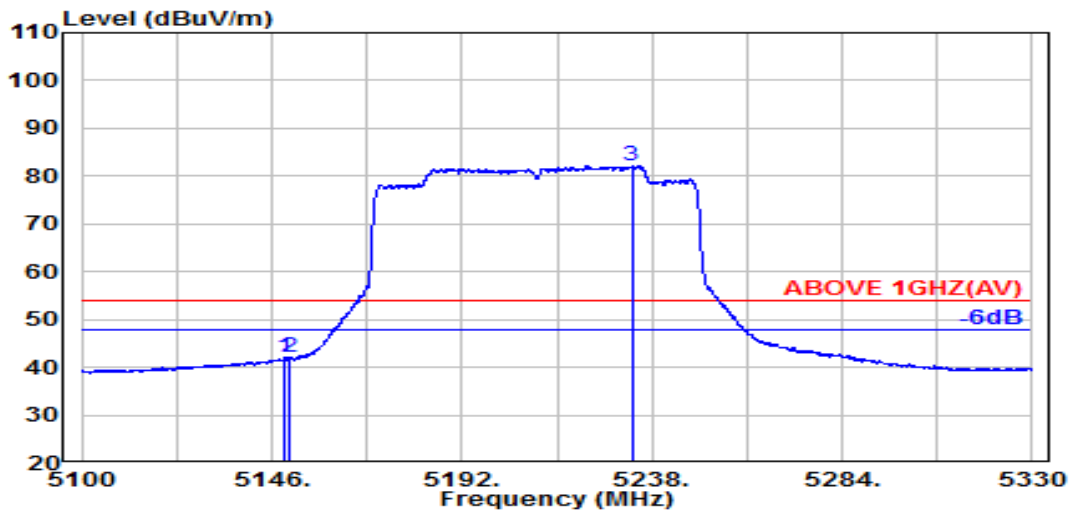


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.50	8.89	34.34	33.06	42.10	54.00	11.90	Average
5150.000	34.50	8.89	34.34	32.94	41.99	54.00	12.01	Average
@ 5233.100	34.57	8.93	34.30	73.00	82.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

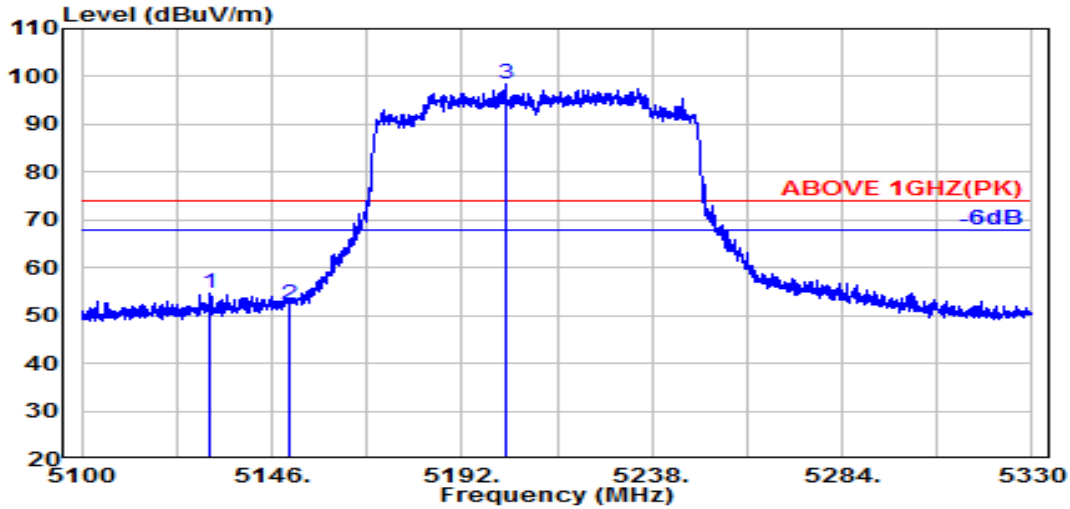

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.800	34.39	8.88	34.35	45.69	54.60	74.00	19.40	Peak
5150.000	34.50	8.89	34.34	43.14	52.19	74.00	21.81	Peak
@ 5202.600	34.69	8.92	34.32	89.15	98.44	---	---	Peak

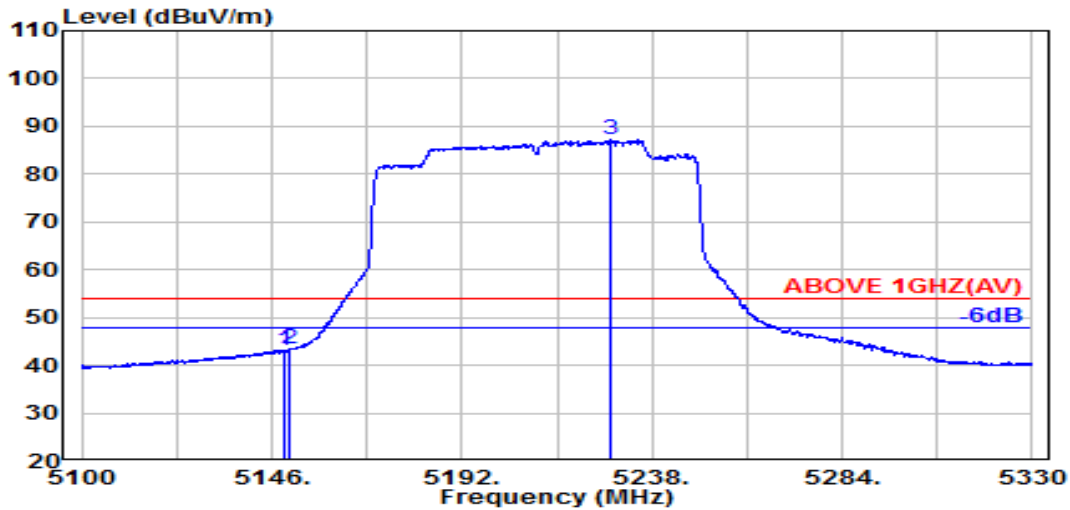


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.49	8.89	34.34	34.10	43.14	54.00	10.86	Average
5150.000	34.50	8.89	34.34	34.40	43.45	54.00	10.55	Average
@ 5227.800	34.59	8.93	34.31	78.00	87.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

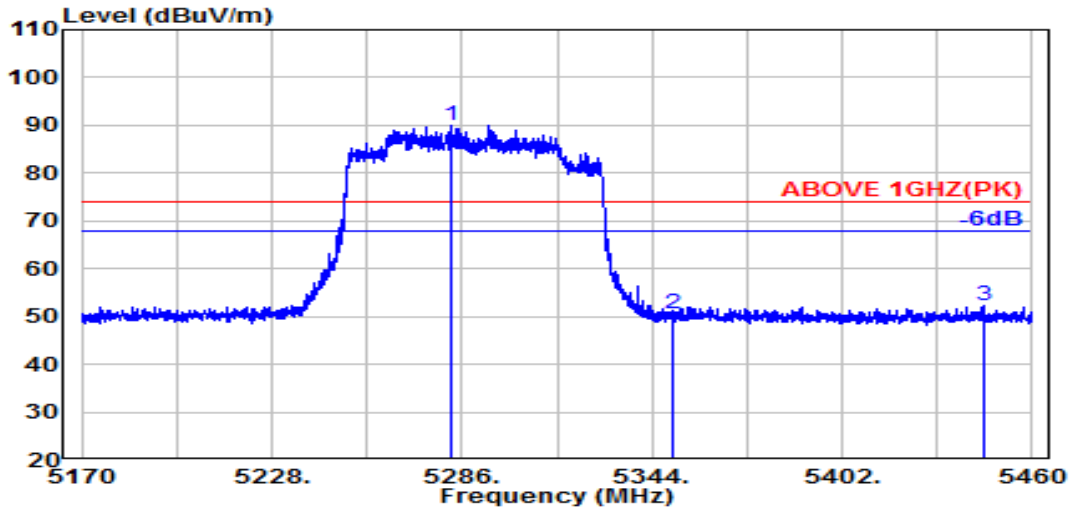

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.500	34.43	8.96	34.28	80.95	90.06	---	---	Peak
5350.000	34.90	9.00	34.26	40.90	50.54	74.00	23.46	Peak
5445.000	34.62	9.05	34.22	42.73	52.18	74.00	21.82	Peak

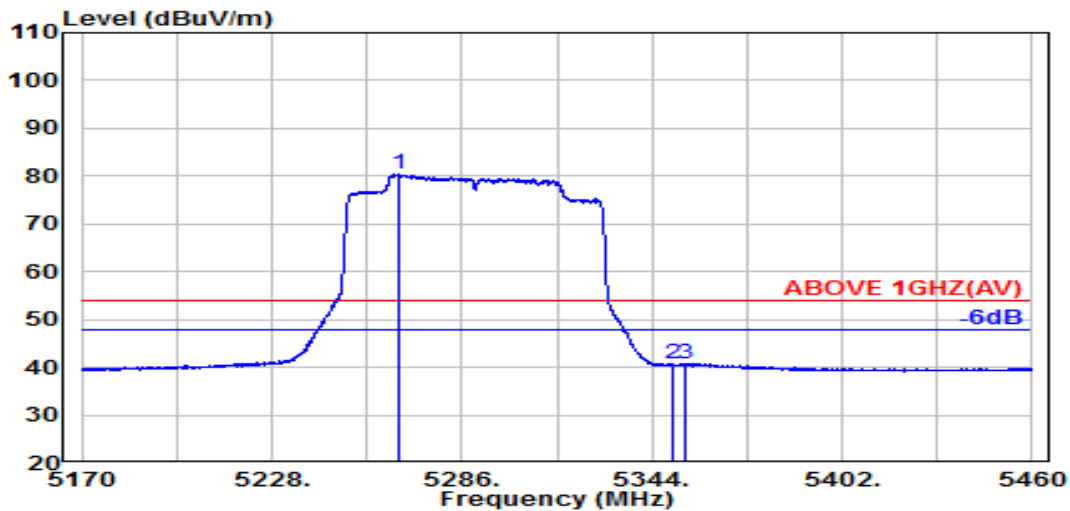


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.900	34.47	8.95	34.29	71.26	80.39	---	---	Average
5350.000	34.90	9.00	34.26	30.96	40.60	54.00	13.40	Average
5354.000	34.89	9.00	34.26	31.17	40.80	54.00	13.20	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

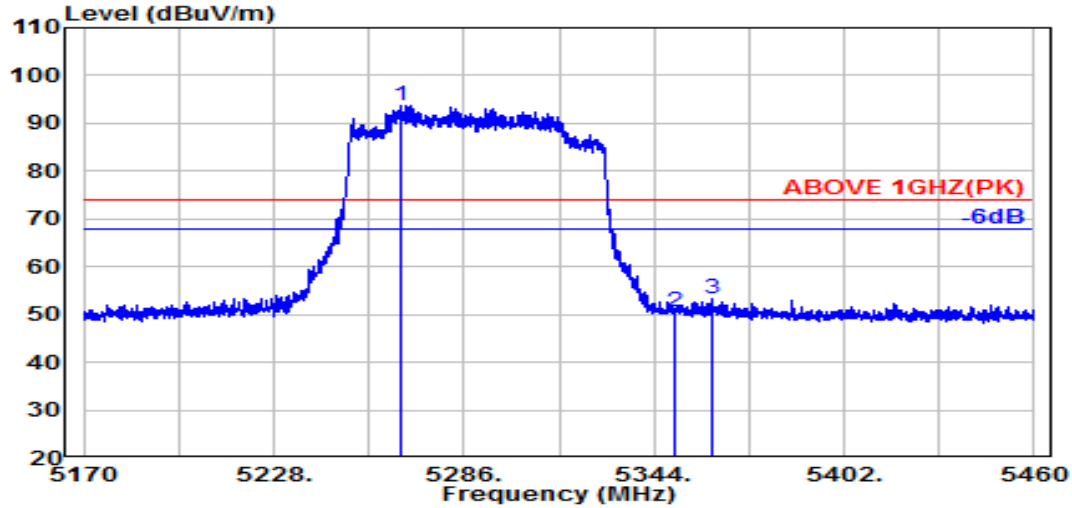

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.500	34.47	8.95	34.29	84.68	93.81	---	---	Peak
5350.000	34.90	9.00	34.26	41.06	50.70	74.00	23.30	Peak
5362.000	34.88	9.00	34.25	43.56	53.18	74.00	20.82	Peak

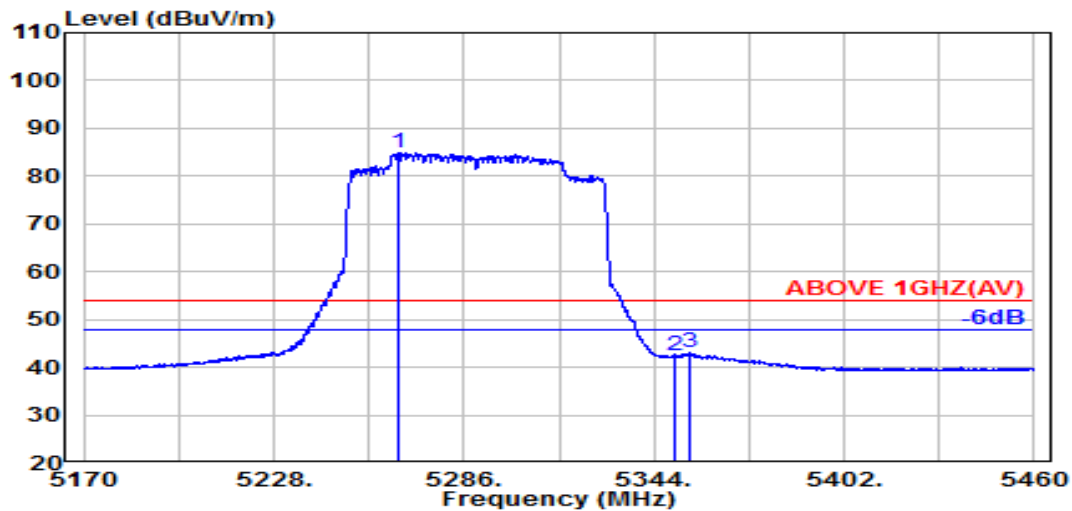


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.000	34.47	8.95	34.29	75.88	85.01	---	---	Average
5350.000	34.90	9.00	34.26	32.84	42.48	54.00	11.52	Average
5354.700	34.89	9.00	34.26	33.32	42.96	54.00	11.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

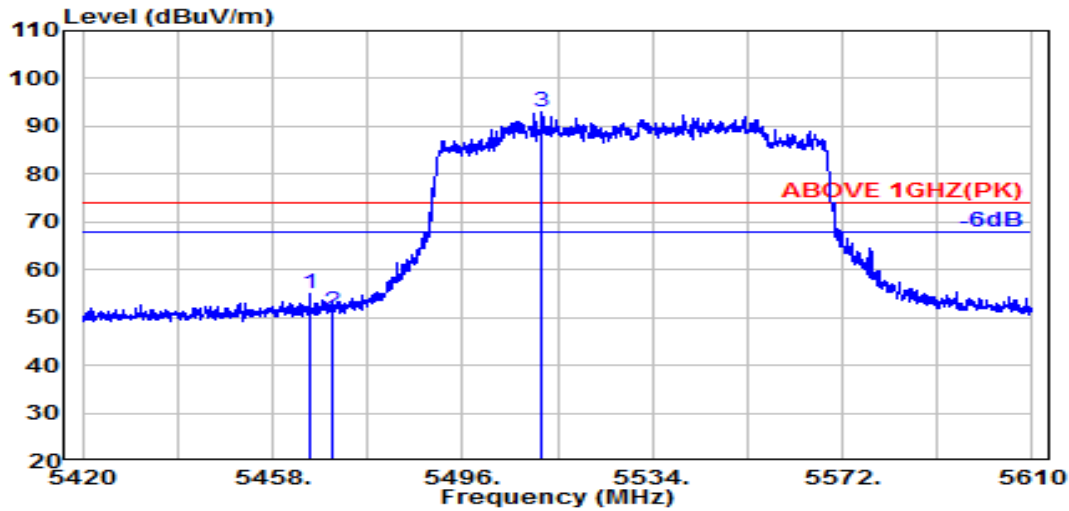

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.63	9.06	34.21	45.66	55.14	74.00	18.86	Peak
5470.000	34.64	9.06	34.21	41.79	51.27	74.00	22.73	Peak
@ 5512.000	34.70	9.08	34.21	83.43	93.01	---	---	Peak

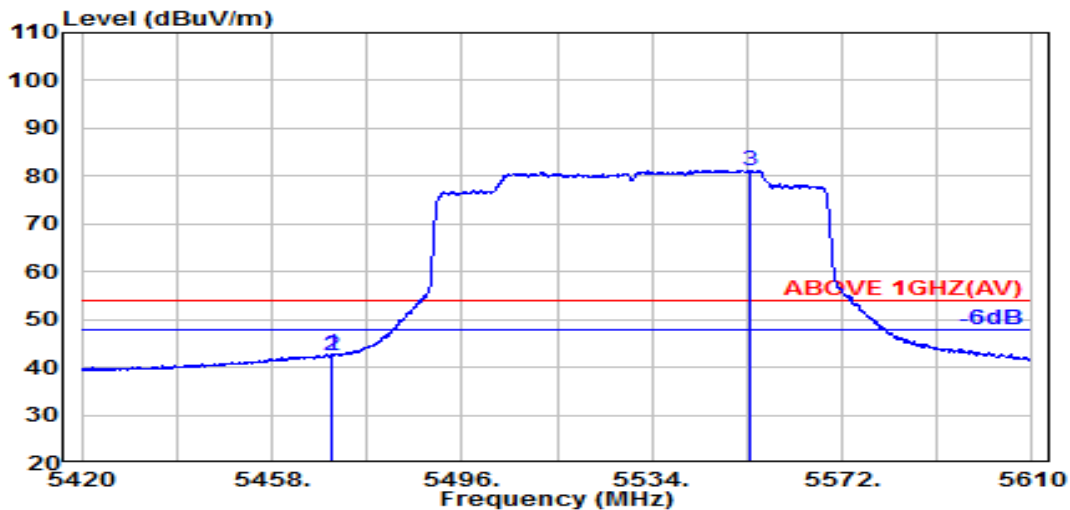


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.64	9.06	34.21	33.30	42.79	54.00	11.21	Average
5470.000	34.64	9.06	34.21	32.91	42.40	54.00	11.60	Average
@ 5553.500	34.68	9.11	34.23	71.74	81.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

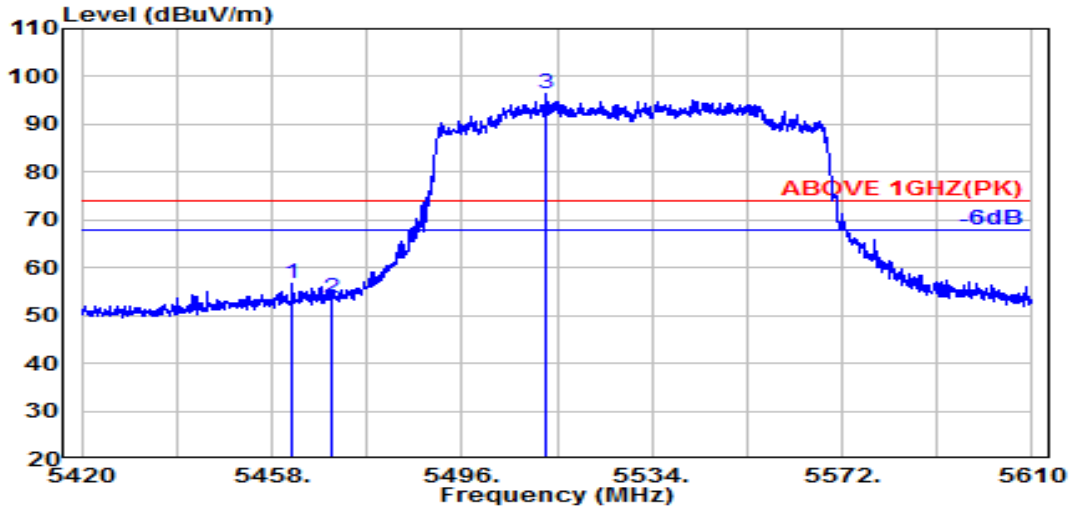

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.100	34.62	9.06	34.21	47.16	56.62	74.00	17.38	Peak
5470.000	34.64	9.06	34.21	44.06	53.55	74.00	20.45	Peak
@ 5513.000	34.70	9.08	34.21	86.89	96.47	---	---	Peak

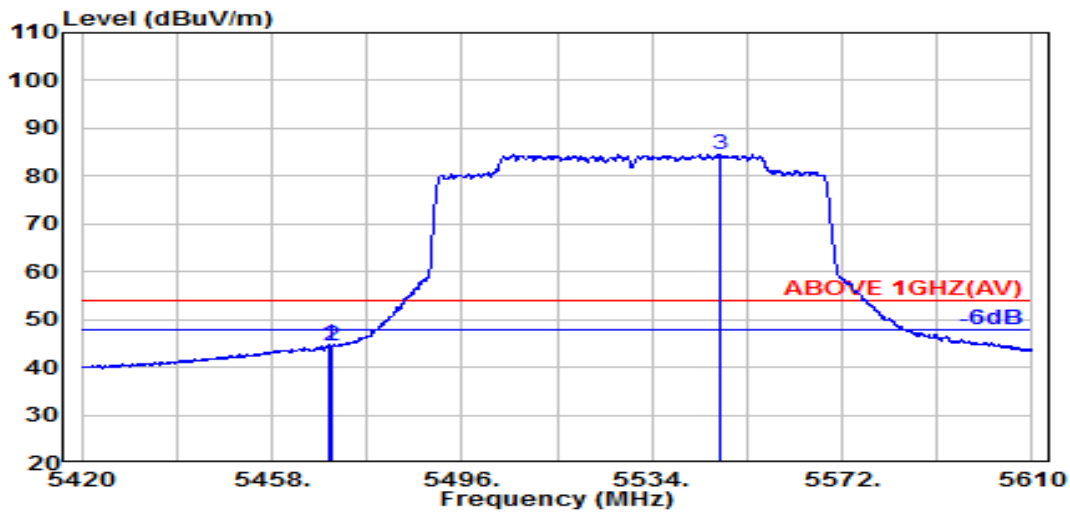


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.64	9.06	34.21	35.15	44.64	54.00	9.36	Average
5470.000	34.64	9.06	34.21	34.84	44.33	54.00	9.67	Average
@ 5547.400	34.70	9.10	34.22	74.97	84.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

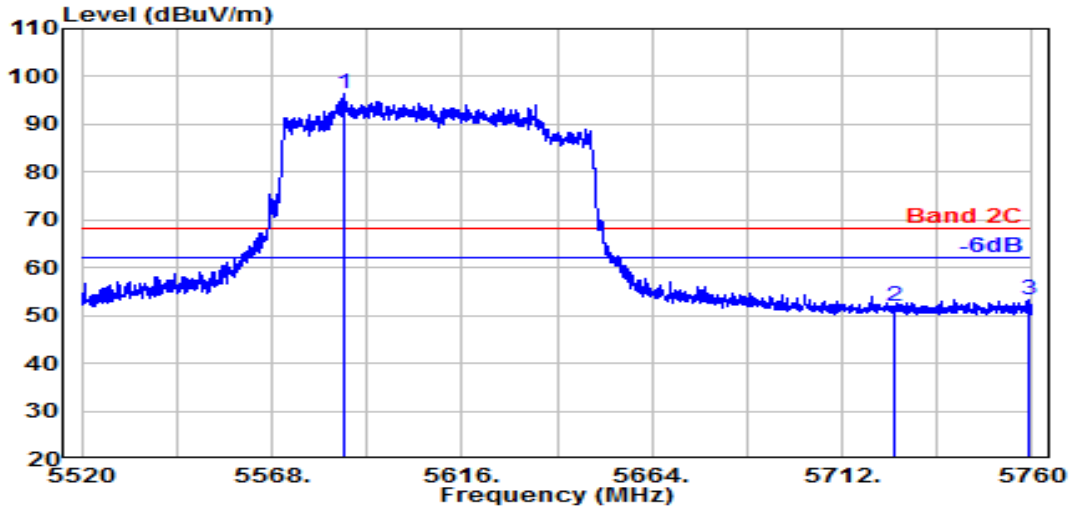

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5586.400	34.48	9.12	34.24	87.17	96.53	---	---	Peak
5725.000	34.85	9.19	34.31	42.14	51.88	68.20	16.32	Peak
5758.900	35.02	9.21	34.32	43.39	53.30	68.20	14.90	Peak

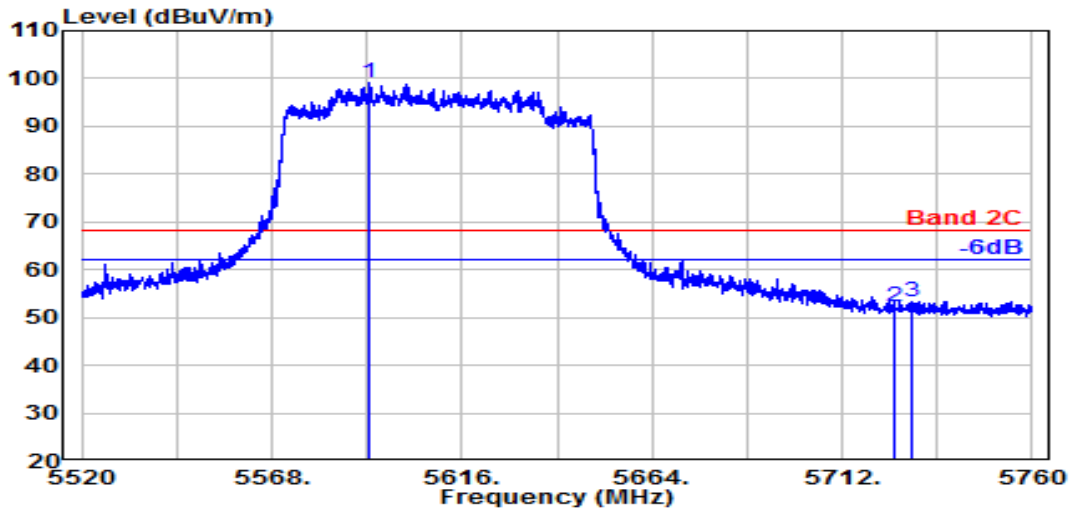

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.500	34.44	9.13	34.24	89.71	99.04	---	---	Peak
5725.000	34.85	9.19	34.31	42.44	52.17	68.20	16.03	Peak
5729.900	34.88	9.20	34.31	43.59	53.36	68.20	14.84	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	12.65	34.73	30.07	45.59	54.00	8.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	12.65	34.73	29.94	45.46	54.00	8.54	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	12.80	34.61	27.80	43.89	54.00	10.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	12.80	34.61	27.45	43.54	54.00	10.46	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11160.000	38.16	13.26	34.51	27.81	44.72	54.00	9.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11160.000	38.16	13.26	34.51	27.58	44.49	54.00	9.51	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	26.93	44.35	54.00	9.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	27.77	45.20	54.00	8.80	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11570.000	38.43	13.70	34.54	26.88	44.48	54.00	9.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11570.000	38.43	13.70	34.54	28.41	46.00	54.00	8.00	Peak

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.76	12.71	34.66	28.15	43.96	54.00	10.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.76	12.71	34.66	29.83	45.64	54.00	8.36	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	12.80	34.61	28.91	45.00	54.00	9.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	12.80	34.61	28.48	44.57	54.00	9.43	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.16	13.26	34.51	27.43	44.34	54.00	9.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.16	13.26	34.51	27.79	44.70	54.00	9.30	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	28.32	45.75	54.00	8.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	27.86	45.29	54.00	8.71	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.43	13.70	34.54	27.83	45.42	54.00	8.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.43	13.70	34.54	27.95	45.54	54.00	8.46	Peak

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.72	12.69	34.68	28.85	44.59	54.00	9.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.72	12.69	34.68	29.22	44.96	54.00	9.04	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.84	12.75	34.63	28.01	43.98	54.00	10.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.84	12.75	34.63	27.96	43.93	54.00	10.07	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.10	13.09	34.51	27.32	44.00	54.00	10.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.10	13.09	34.51	28.07	44.75	54.00	9.25	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.34	13.54	34.52	26.98	44.35	54.00	9.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.34	13.54	34.52	26.87	44.23	54.00	9.77	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.41	13.72	34.54	28.03	45.61	54.00	8.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.41	13.72	34.54	27.58	45.17	54.00	8.83	Peak

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.64	12.66	34.71	29.75	45.35	54.00	8.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.64	12.66	34.71	29.40	44.99	54.00	9.01	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.88	12.78	34.62	27.26	43.30	54.00	10.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.88	12.78	34.62	27.38	43.43	54.00	10.57	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.22	13.33	34.51	27.59	44.62	54.00	9.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.22	13.33	34.51	27.45	44.49	54.00	9.51	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.30	13.50	34.52	26.97	44.25	54.00	9.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.30	13.50	34.52	28.11	45.39	54.00	8.61	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.45	13.68	34.53	27.68	45.28	54.00	8.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.45	13.68	34.53	27.54	45.13	54.00	8.87	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	12.72	34.64	28.58	44.46	54.00	9.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	12.72	34.64	28.42	44.30	54.00	9.70	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.14	13.24	34.51	28.25	45.12	54.00	8.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.14	13.24	34.51	27.53	44.40	54.00	9.60	Peak

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.76	12.71	34.66	29.48	45.29	54.00	8.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.76	12.71	34.66	27.78	43.59	54.00	10.41	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.82	12.74	34.63	27.71	43.63	54.00	10.37	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.82	12.74	34.63	27.96	43.88	54.00	10.12	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	13.09	34.51	28.01	44.69	54.00	9.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	13.09	34.51	27.54	44.22	54.00	9.78	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	28.26	45.69	54.00	8.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	27.63	45.06	54.00	8.94	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.45	13.78	34.56	28.23	45.90	54.00	8.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.45	13.78	34.56	27.77	45.44	54.00	8.56	Peak

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.72	12.69	34.68	27.42	43.16	54.00	10.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.72	12.69	34.68	28.22	43.96	54.00	10.04	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.84	12.75	34.63	28.29	44.25	54.00	9.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.84	12.75	34.63	28.70	44.67	54.00	9.33	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.10	13.20	34.51	27.95	44.73	54.00	9.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.10	13.20	34.51	27.35	44.14	54.00	9.86	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.34	13.54	34.52	27.52	44.89	54.00	9.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.34	13.54	34.52	27.38	44.75	54.00	9.25	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.41	13.72	34.54	28.22	45.81	54.00	8.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.41	13.72	34.54	27.88	45.47	54.00	8.53	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.64	12.66	34.71	29.71	45.30	54.00	8.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.64	12.66	34.71	28.29	43.88	54.00	10.12	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.88	12.78	34.62	28.97	45.01	54.00	8.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.88	12.78	34.62	27.57	43.61	54.00	10.39	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.22	13.33	34.51	27.75	44.79	54.00	9.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.22	13.33	34.51	28.36	45.39	54.00	8.61	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.30	13.50	34.52	28.14	45.42	54.00	8.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.30	13.50	34.52	28.68	45.96	54.00	8.04	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.45	13.68	34.53	28.95	46.54	54.00	7.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.45	13.68	34.53	27.93	45.53	54.00	8.47	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	12.72	34.64	27.22	43.11	54.00	10.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	12.72	34.64	28.71	44.59	54.00	9.41	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.14	13.24	34.51	28.22	45.09	54.00	8.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.14	13.24	34.51	28.18	45.05	54.00	8.95	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.