


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	13
A.2.3 Emissions in Non-restricted Frequency Bands:.....	14
A.3 20dB BANDWIDTH	15
A.3.1 20dB Bandwidth Result.....	15
A.3.2 Measurement Plots	16
A.4 CARRIER FREQUENCY SEPARATION	17
A.5 TIME OF OCCUPANCY	19
A.5.1 Time of Occupancy	19
A.6 NUMBER OF HOPPING CHANNELS	29
A.7 MAXIMUM PEAK OUTPUT POWER	30
A.7.1 Maximum Peak Output Power.....	30
A.7.2 Measurement Plots	31
A.8 EMISSION LIMITATIONS MEASUREMENT	32
A.8.1 Band Edge.....	32
A.8.2 Spurious Emission	34

A.1 CONDUCTED EMISSION

Test Date	2023/02/08	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Joe kuo

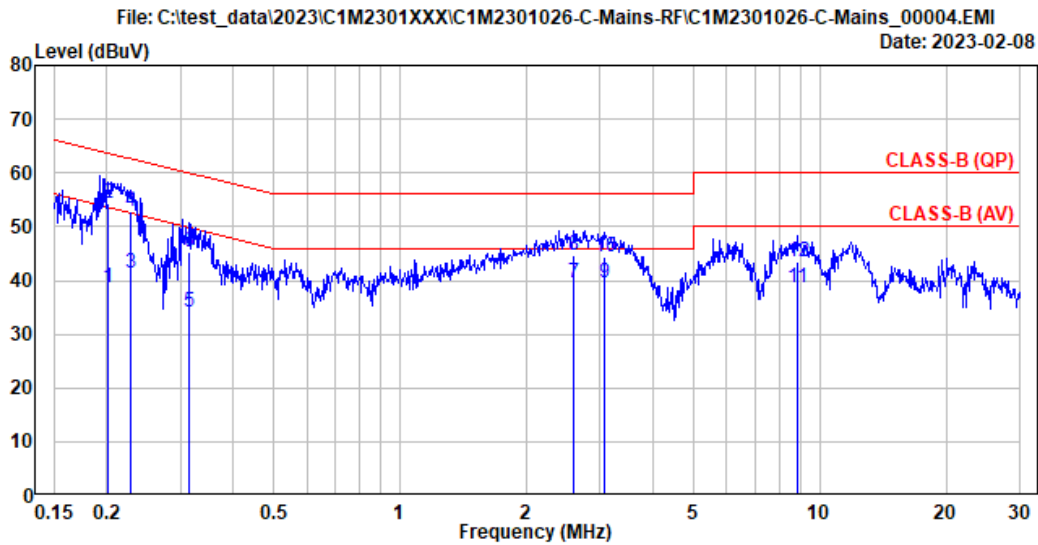

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 23°C/60%	Test Rating	: 120Vac/60Hz
EUT Model	: 15Z90RT	Engineer	: Joe_Kuo
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.201	10.32	0.03	9.85	18.32	38.52	53.56	15.04	Average
2	0.201	10.32	0.03	9.85	34.08	54.28	63.56	9.28	QP
3	0.229	10.32	0.03	9.85	21.23	41.43	52.48	11.05	Average
4	0.229	10.32	0.03	9.85	32.57	52.77	62.48	9.71	QP
5	0.315	10.32	0.03	9.85	13.93	34.13	49.83	15.70	Average
6	0.315	10.32	0.03	9.85	25.06	45.26	59.83	14.57	QP
7	2.596	10.38	0.07	9.86	19.35	39.66	46.00	6.34	Average
8	2.596	10.38	0.07	9.86	24.51	44.82	56.00	11.18	QP
9	3.060	10.38	0.07	9.86	19.31	39.62	46.00	6.38	Average
10	3.060	10.38	0.07	9.86	24.05	44.36	56.00	11.64	QP
11	8.847	10.60	0.13	9.88	17.91	38.52	50.00	11.48	Average
12	8.847	10.60	0.13	9.88	22.77	43.38	60.00	16.62	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2023/02/08	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Joe kuo

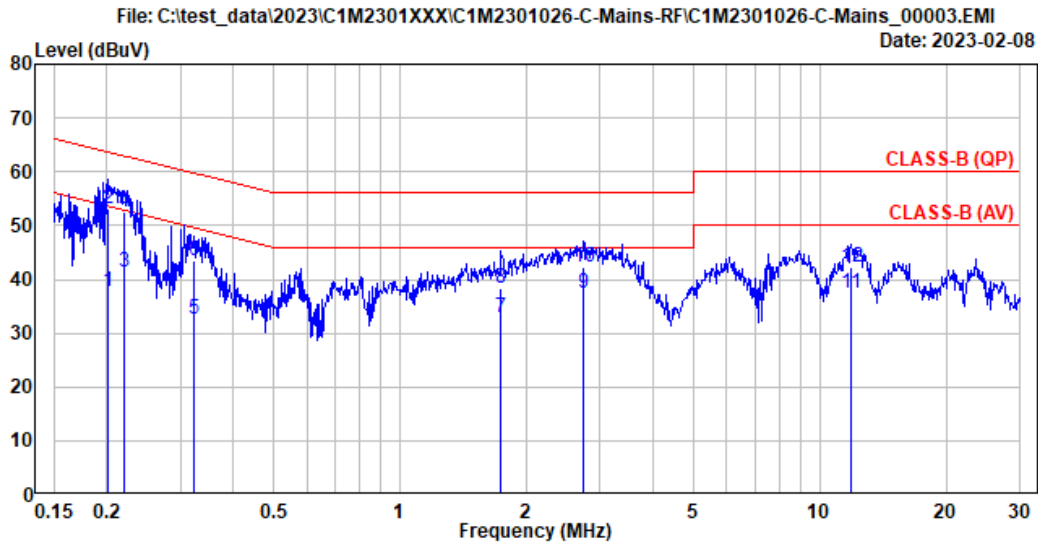

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)	Phase	: Line
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)	Test Rating	: 120Vac/60Hz
Limit	: CLASS-B (QP)	Engineer	: Joe_Kuo
Environment	: 23°C/60%		
EUT Model	: 15Z90RT		
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.202	10.22	0.03	9.85	17.67	37.77	53.52	15.75	Average
2	0.202	10.22	0.03	9.85	33.07	53.17	63.52	10.35	QP
3	0.220	10.22	0.03	9.85	21.13	41.23	52.81	11.58	Average
4	0.220	10.22	0.03	9.85	32.37	52.47	62.81	10.34	QP
5	0.322	10.22	0.03	9.85	12.46	32.56	49.67	17.11	Average
6	0.322	10.22	0.03	9.85	23.50	43.60	59.67	16.07	QP
7	1.742	10.25	0.06	9.86	12.81	32.98	46.00	13.02	Average
8	1.742	10.25	0.06	9.86	18.25	38.42	56.00	17.58	QP
9	2.742	10.26	0.07	9.86	17.21	37.40	46.00	8.60	Average
10	2.742	10.26	0.07	9.86	22.19	42.38	56.00	13.62	QP
11	11.871	10.47	0.15	9.90	16.76	37.28	50.00	12.72	Average
12	11.871	10.47	0.15	9.90	21.63	42.15	60.00	17.85	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2023/02/02 ~ 08	Temp./Hum.	18 ~ 20°C/68 ~ 77%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.88	1.46	26.49	35.13	32.98	40.00	7.02	Peak
112.450	17.61	2.76	26.21	33.70	27.87	43.50	15.63	Peak
154.160	16.66	3.24	25.98	38.93	32.85	43.50	10.65	Peak
366.590	20.92	5.55	26.19	31.90	32.18	46.00	13.82	Peak
497.540	23.43	6.74	27.11	32.98	36.03	46.00	9.97	Peak
636.250	24.52	7.30	27.41	33.21	37.62	46.00	8.38	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	22.50	1.50	0.00	14.52	38.53	40.00	1.47	QP
49.400	14.45	1.82	26.46	47.47	37.28	40.00	2.72	Peak
150.280	16.87	3.20	26.00	38.41	32.49	43.50	11.01	Peak
294.810	19.23	4.65	25.62	32.05	30.31	46.00	15.69	Peak
391.810	21.44	5.84	26.38	32.13	33.04	46.00	12.96	Peak
485.900	23.25	6.65	27.04	33.84	36.71	46.00	9.29	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

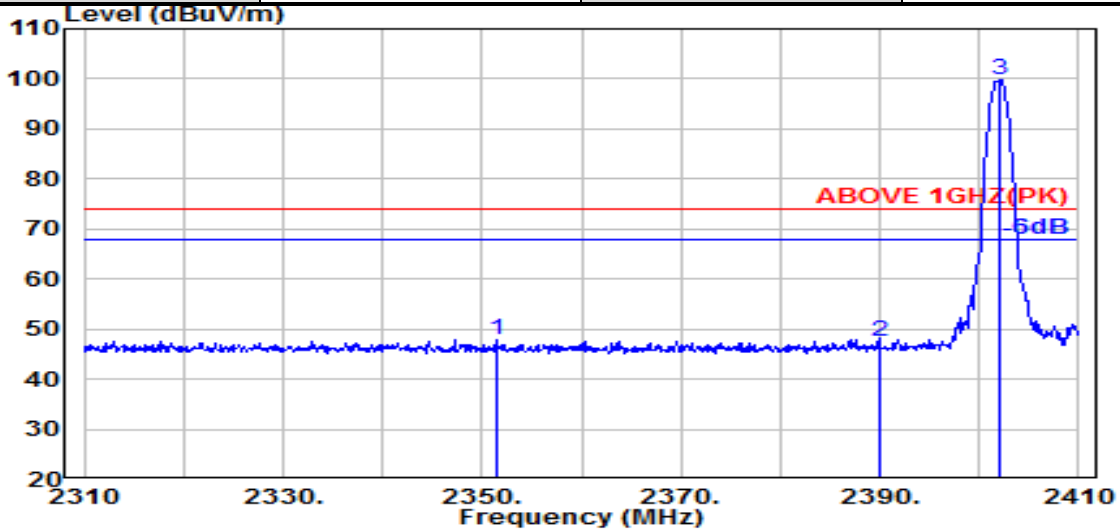

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2351.400	32.00	5.66	34.50	44.83	47.99	74.00	26.01	Peak
2390.000	32.00	5.72	34.51	44.38	47.59	74.00	26.41	Peak
@ 2402.100	32.00	5.74	34.51	96.43	99.66	---	---	Peak

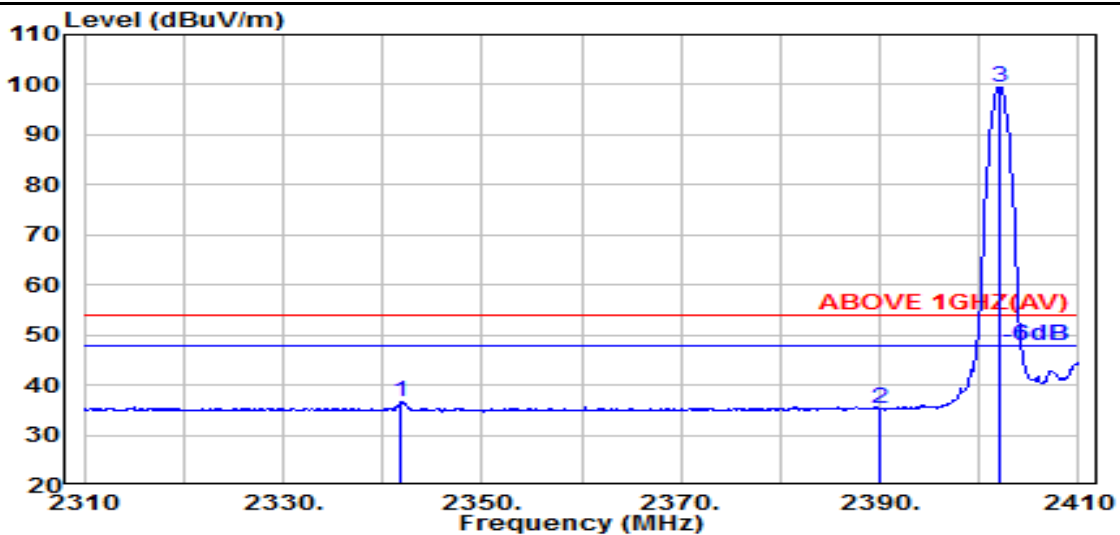


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2341.900	32.03	5.65	34.50	33.36	36.54	54.00	17.46	Average
2390.000	32.00	5.72	34.51	32.14	35.36	54.00	18.64	Average
@ 2402.000	32.00	5.74	34.51	96.29	99.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

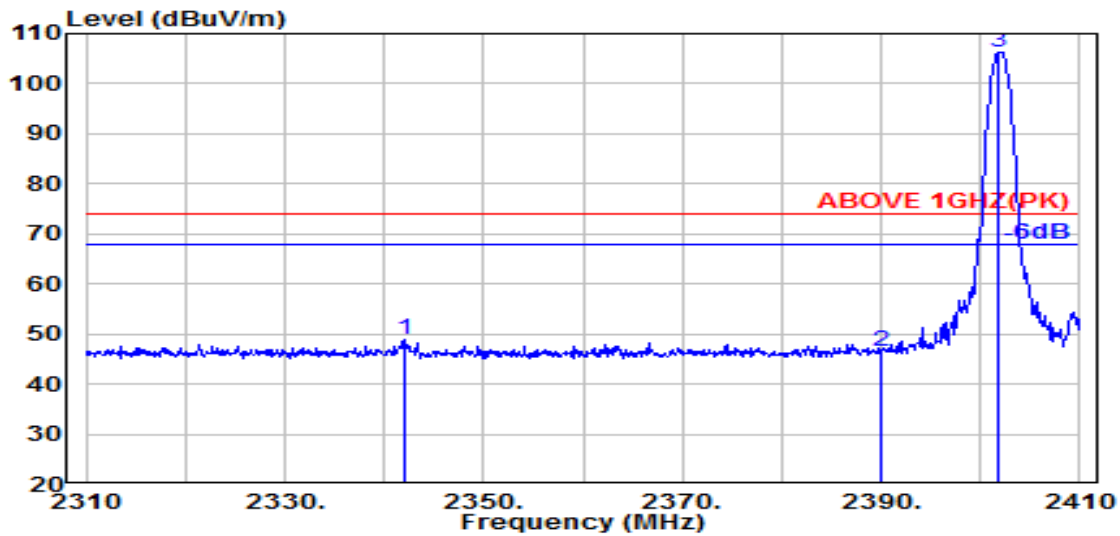

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	32.03	5.65	34.50	45.55	48.73	74.00	25.27	Peak
2390.000	32.00	5.72	34.51	43.19	46.41	74.00	27.59	Peak
@ 2401.800	32.00	5.74	34.51	102.95	106.18	---	---	Peak

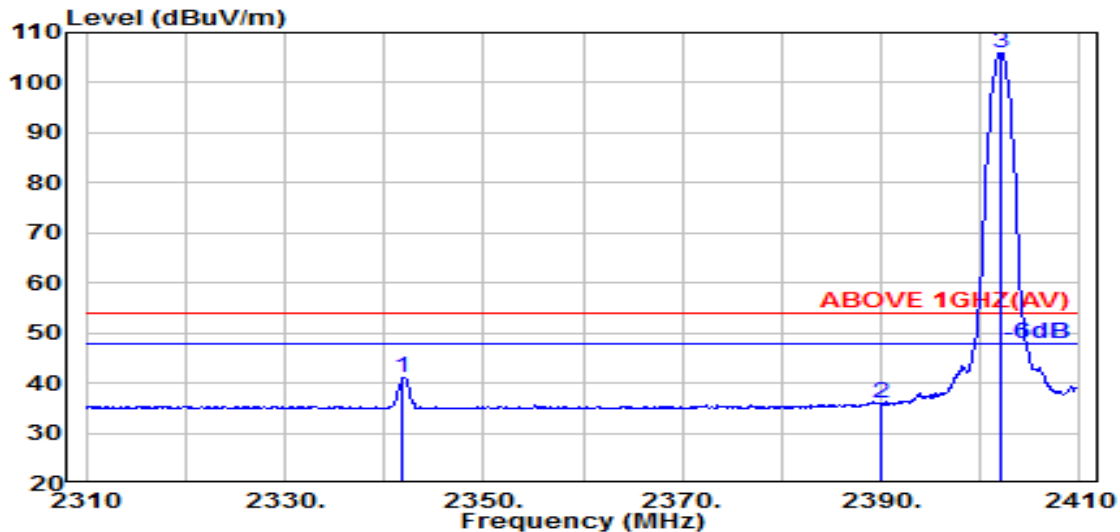


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	32.03	5.65	34.50	37.99	41.17	54.00	12.83	Average
2390.000	32.00	5.72	34.51	32.81	36.03	54.00	17.97	Average
@ 2402.100	32.00	5.74	34.51	102.79	106.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

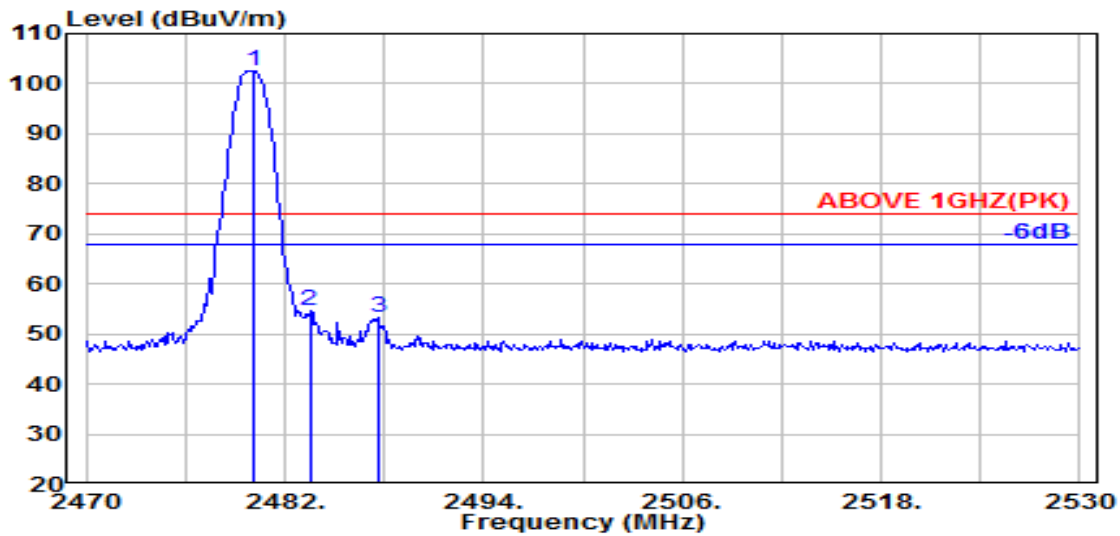

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.36	5.86	34.53	98.88	102.57	---	---	Peak
2483.500	32.40	5.87	34.53	50.95	54.69	74.00	19.31	Peak
2487.600	32.45	5.87	34.53	49.62	53.42	74.00	20.58	Peak

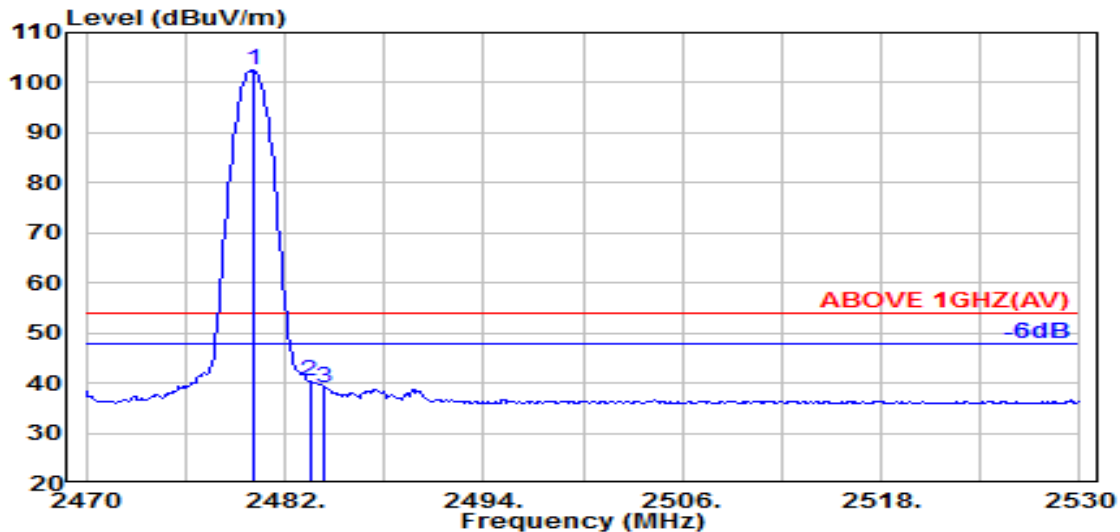


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.36	5.86	34.53	98.77	102.46	---	---	Average
2483.500	32.40	5.87	34.53	36.47	40.21	54.00	13.79	Average
2484.400	32.41	5.87	34.53	35.34	39.10	54.00	14.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

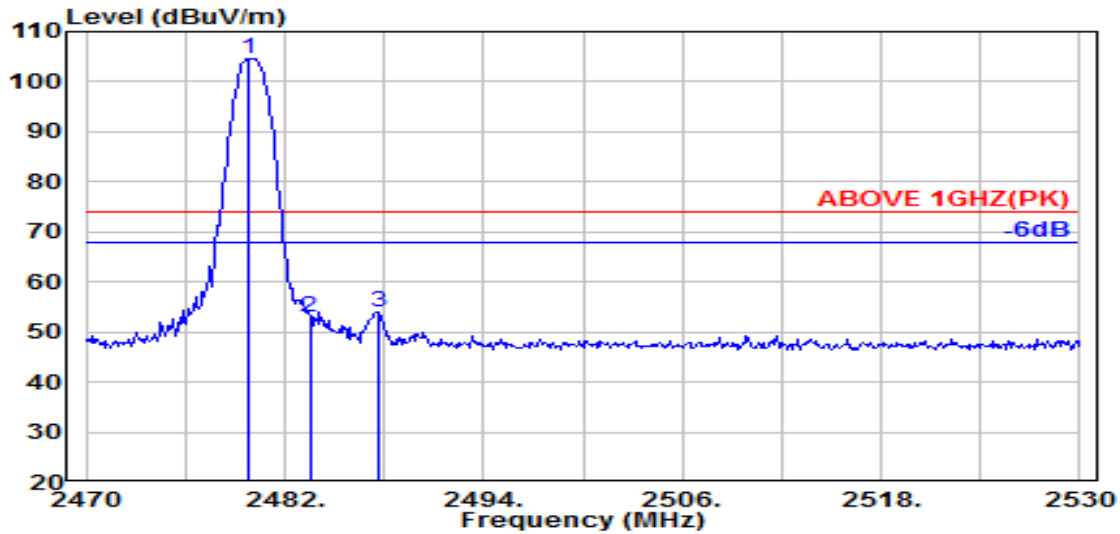

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	32.36	5.86	34.53	100.90	104.59	---	---	Peak
2483.500	32.40	5.87	34.53	49.08	52.82	74.00	21.18	Peak
2487.600	32.45	5.87	34.53	50.29	54.09	74.00	19.91	Peak

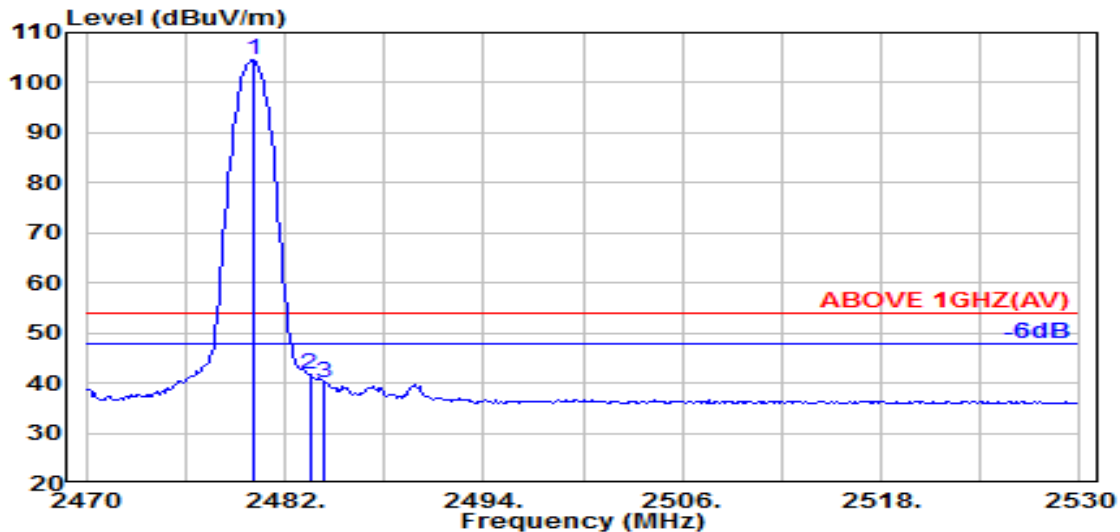


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.36	5.86	34.53	100.74	104.44	---	---	Average
2483.500	32.40	5.87	34.53	38.08	41.82	54.00	12.18	Average
2484.400	32.41	5.87	34.53	36.41	40.16	54.00	13.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

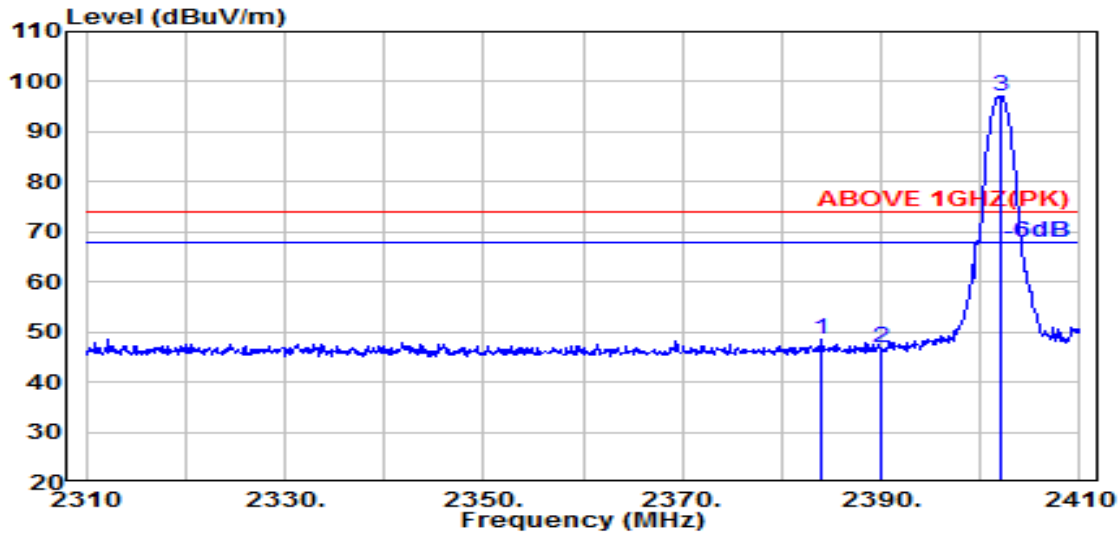

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.100	32.00	5.71	34.51	45.39	48.60	74.00	25.40	Peak
2390.000	32.00	5.72	34.51	43.48	46.70	74.00	27.30	Peak
@ 2402.000	32.00	5.74	34.51	93.88	97.11	---	---	Peak

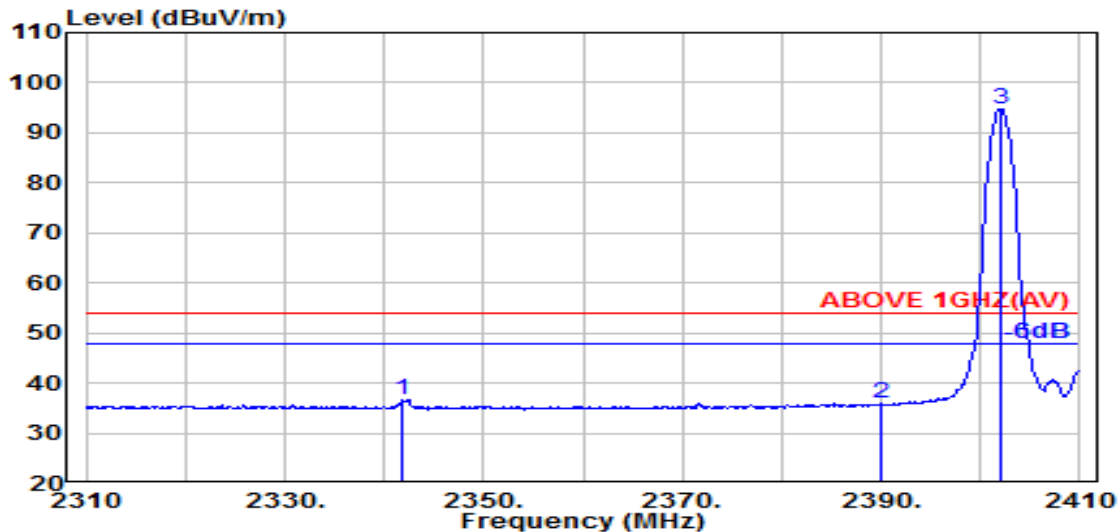


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.800	32.03	5.65	34.50	33.41	36.59	54.00	17.41	Average
2390.000	32.00	5.72	34.51	32.58	35.80	54.00	18.20	Average
@ 2402.100	32.00	5.74	34.51	91.52	94.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

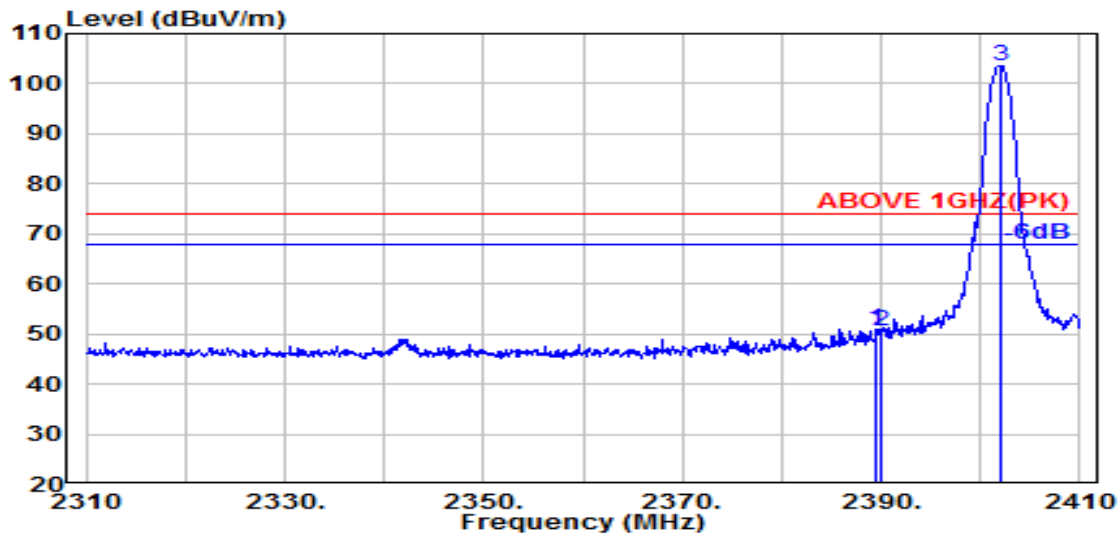

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	47.83	51.04	74.00	22.96	Peak
2390.000	32.00	5.72	34.51	47.25	50.47	74.00	23.53	Peak
@ 2402.000	32.00	5.74	34.51	100.47	103.70	---	---	Peak

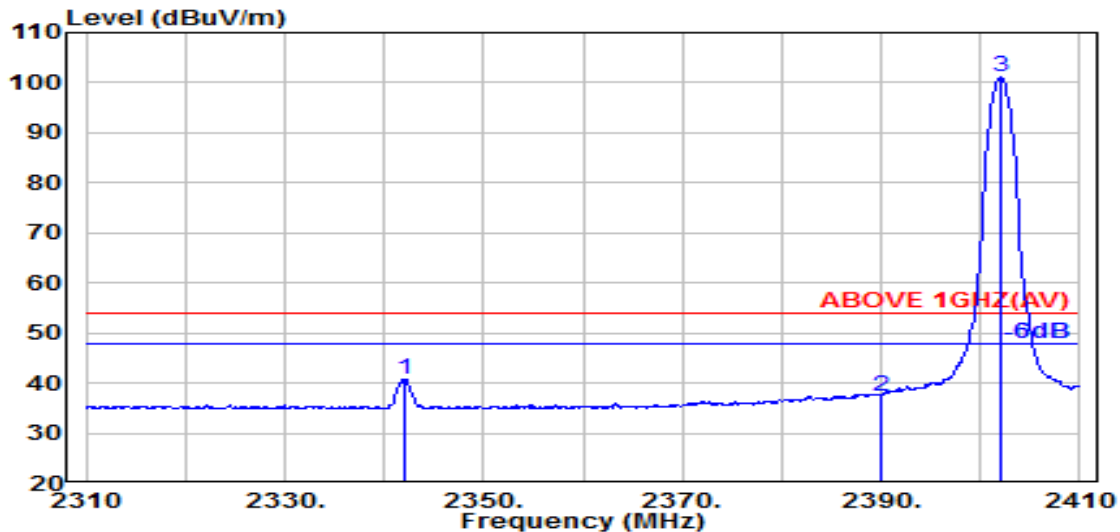


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	32.03	5.65	34.50	37.62	40.80	54.00	13.20	Average
2390.000	32.00	5.72	34.51	34.16	37.37	54.00	16.63	Average
@ 2402.100	32.00	5.74	34.51	97.91	101.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

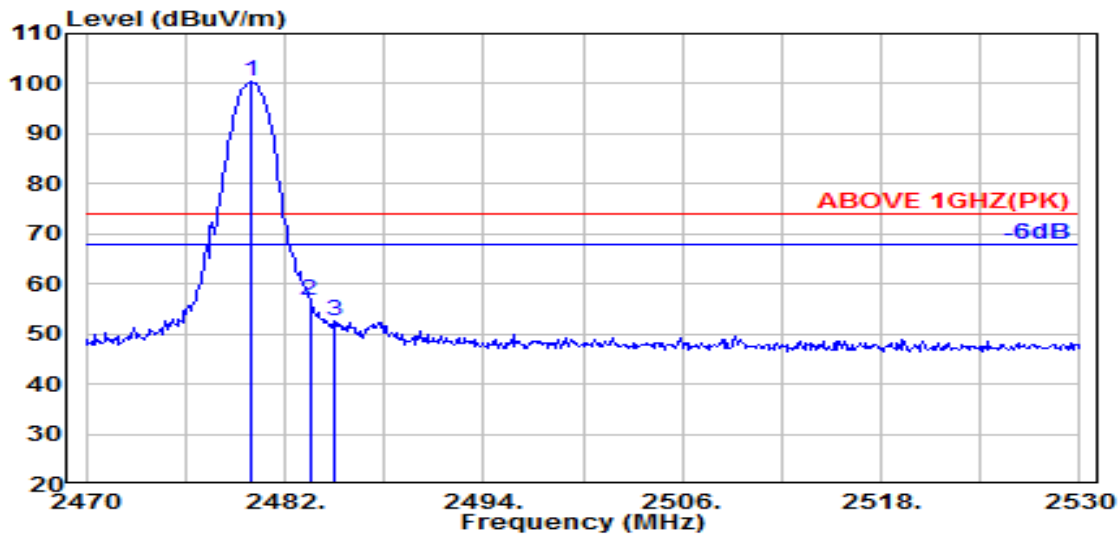

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.36	5.86	34.53	96.64	100.34	---	---	Peak
2483.500	32.40	5.87	34.53	52.91	56.66	74.00	17.34	Peak
2485.000	32.42	5.87	34.53	48.93	52.69	74.00	21.31	Peak

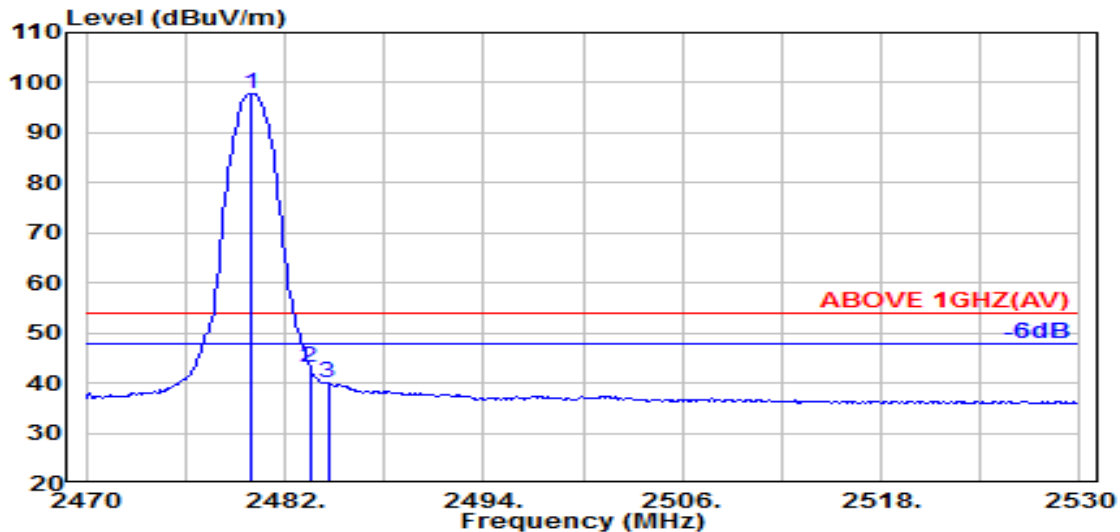


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.36	5.86	34.53	94.19	97.89	---	---	Average
2483.500	32.40	5.87	34.53	39.40	43.15	54.00	10.85	Average
2484.600	32.42	5.87	34.53	36.30	40.05	54.00	13.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

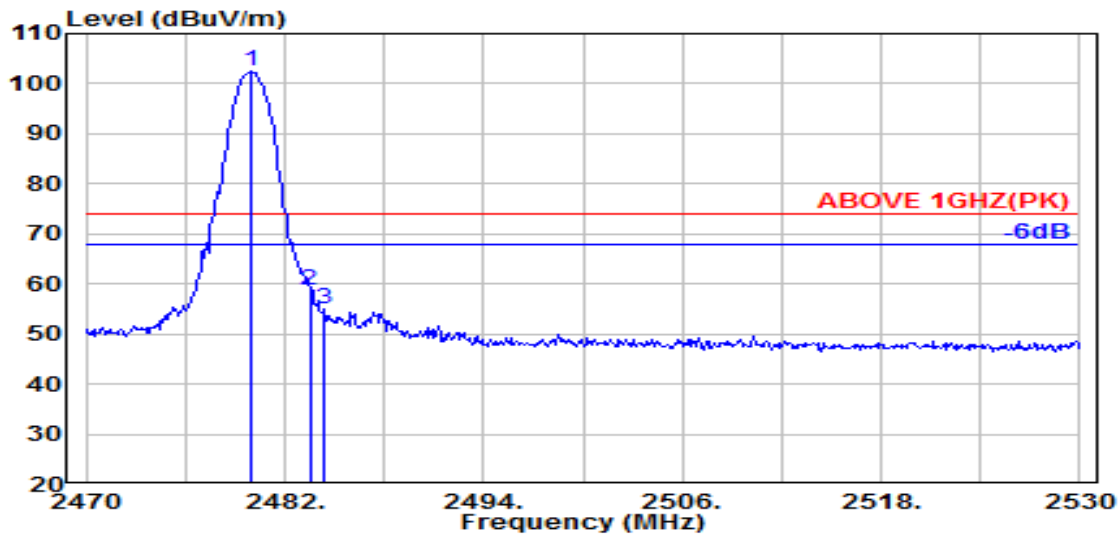

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.36	5.86	34.53	98.69	102.39	---	---	Peak
2483.500	32.40	5.87	34.53	54.96	58.70	74.00	15.30	Peak
2484.400	32.41	5.87	34.53	51.13	54.89	74.00	19.11	Peak

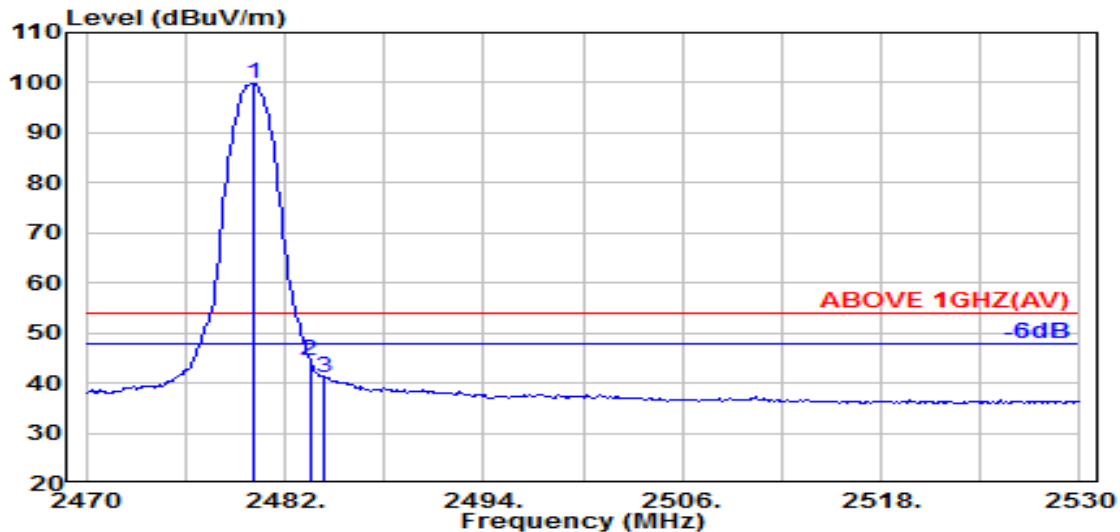

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.36	5.86	34.53	96.15	99.85	---	---	Average
2483.500	32.40	5.87	34.53	40.69	44.43	54.00	9.57	Average
2484.400	32.41	5.87	34.53	37.41	41.17	54.00	12.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4804.000	34.11	8.53	34.43	32.32	40.52	54.00	13.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4804.000	34.11	8.53	34.43	32.66	40.86	54.00	13.14	Peak

Mode	GFSK	Frequency	TX 2441MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4882.000	34.07	8.64	34.42	30.13	38.42	54.00	15.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4882.000	34.07	8.64	34.42	31.60	39.89	54.00	14.11	Peak

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4960.000	34.22	8.75	34.41	32.06	40.61	54.00	13.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4960.000	34.22	8.75	34.41	32.52	41.08	54.00	12.92	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

All emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 20dB BANDWIDTH


Test Date	2023/01/11	Temp./Hum.	23°C/56%
Cable Loss	0.5dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 20dB Bandwidth Result

Mode	Centre Frequency (MHz)	20dB Bandwidth (MHz)	99%Occupied Bandwidth (MHz) (Reference only)	2/3 (20dB Bandwidth)
GFSK	2402	0.9237	0.86043	0.616
	2441	0.9235	0.86564	0.616
	2480	0.9231	0.86380	0.615
8-DPSK	2402	1.434	1.3498	0.956
	2441	1.438	1.3490	0.959
	2480	1.439	1.3480	0.959


Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.


A.3.2 Measurement Plots

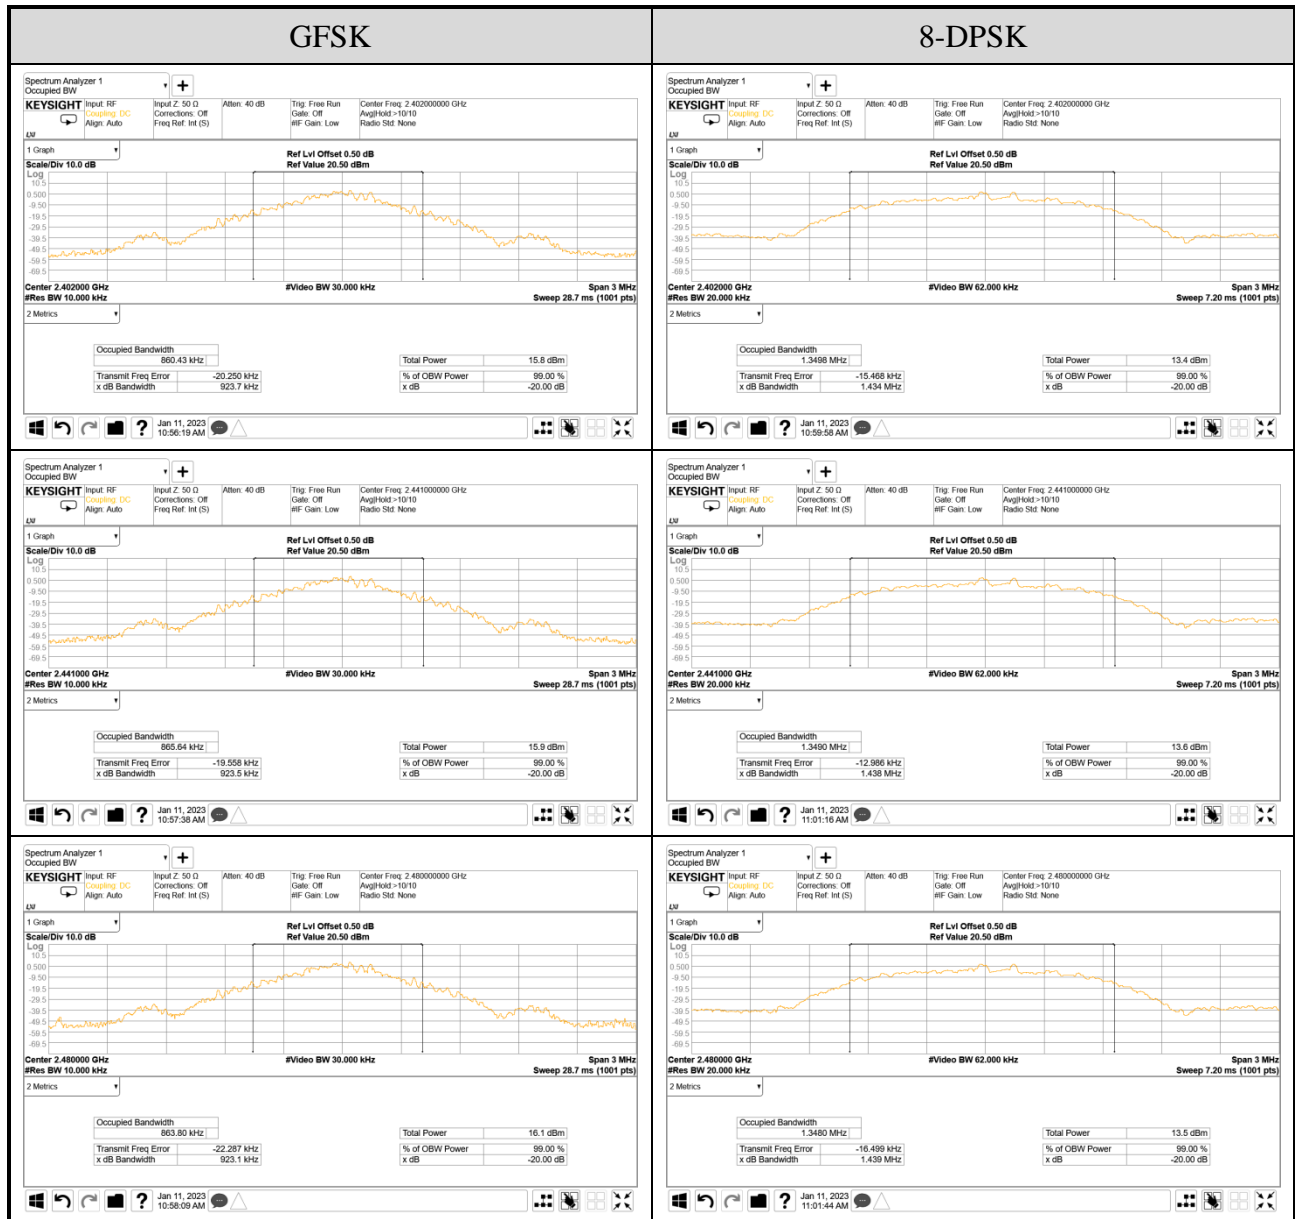

A.4 CARRIER FREQUENCY SEPARATION

Test Date	2023/01/11	Temp./Hum.	23°C/56%
Cable Loss	0.5dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

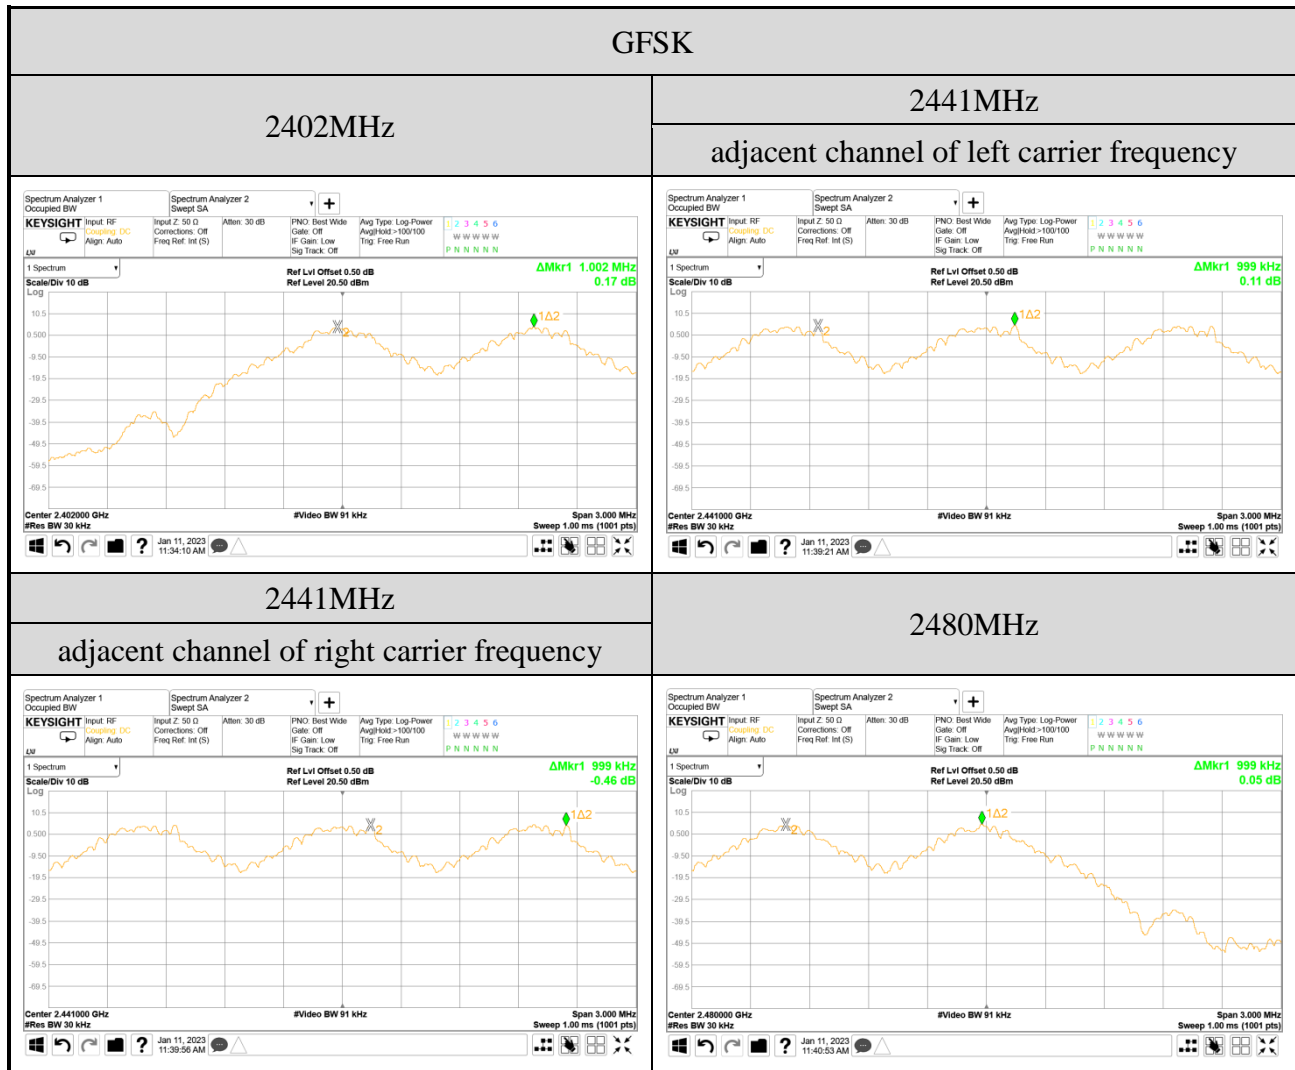

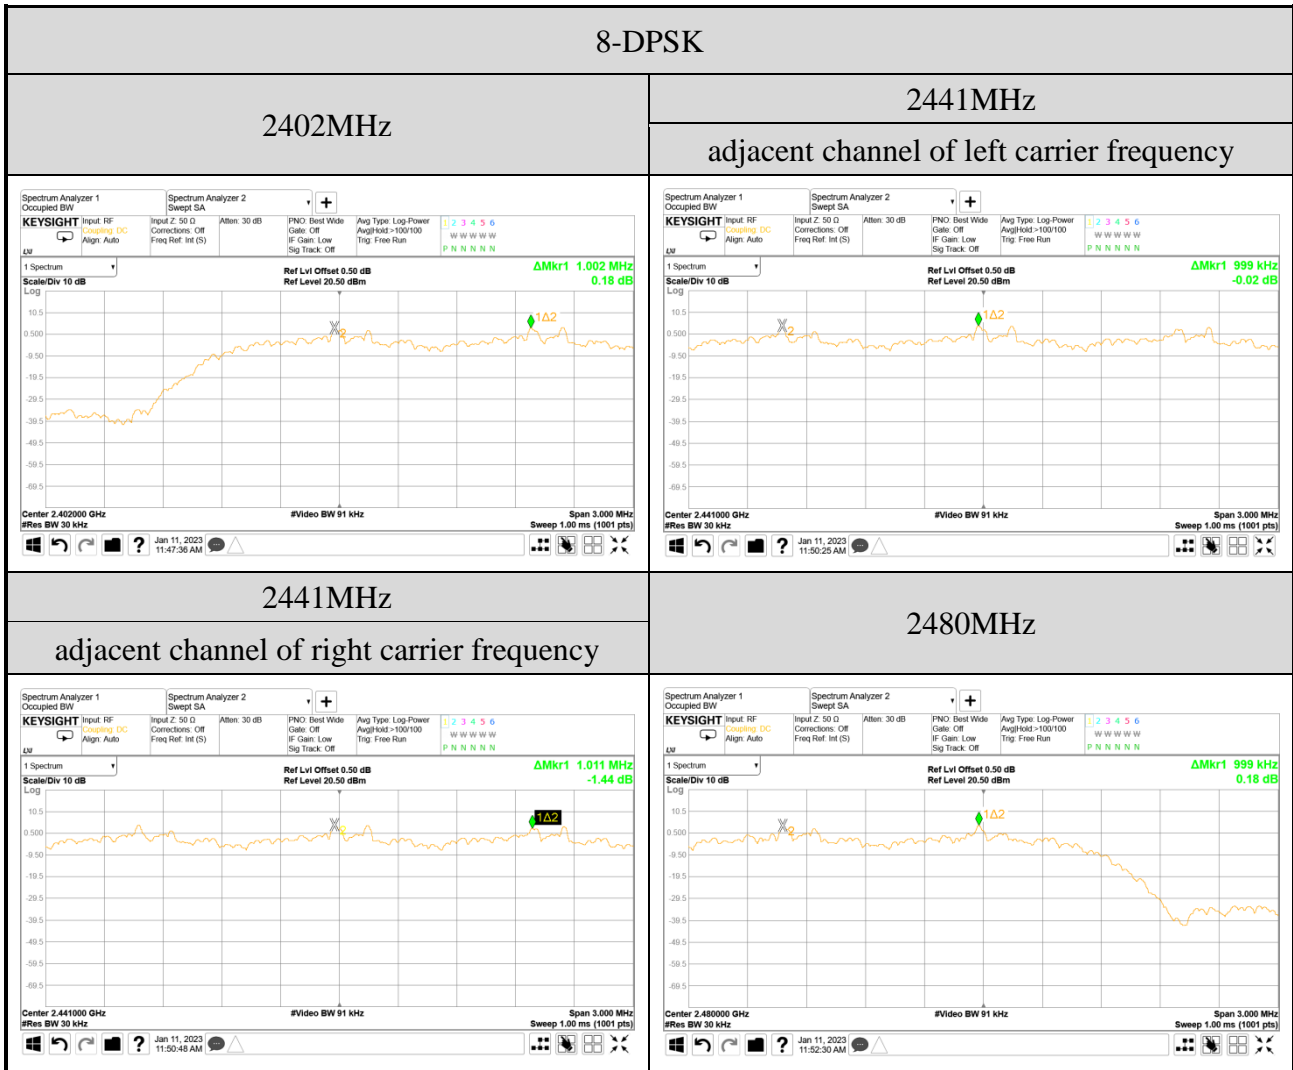

A.5 TIME OF OCCUPANCY

Test Date	2023/01/11	Temp./Hum.	23°C/56%
Cable Loss	0.5dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.5.1 Time of Occupancy

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2402	DH1	10	0.385	121.660	<400
		DH3	5	1.635	258.330	<400
		DH5	2	2.880	182.016	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission * 31.6 seconds * 0.385 ms = 121.660 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
 5 transmission * 31.6 seconds * 1.635 ms = 258.330 ms (<400ms)

DH5 Mode

For each second of 2 transmission appearance, the longest time of occupancy is
 2 transmission * 31.6 seconds * 2.880 ms = 182.016 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2441	DH1	10	0.385	121.660	<400
		DH3	5	1.635	258.330	<400
		DH5	2	2.880	182.016	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission * 31.6 seconds * 0.385 ms = 121.660 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
 5 transmission * 31.6 seconds * 1.635 ms = 258.330 ms (<400ms)

DH5 Mode

For each second of 2 transmission appearance, the longest time of occupancy is
 2 transmission * 31.6 seconds * 2.880 ms = 182.016 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2480	DH1	10	0.385	121.660	<400
		DH3	5	1.635	258.330	<400
		DH5	2	2.880	182.016	<400

Observation Period:

79 channels* **0.4** seconds= **31.6** seconds

DH1 Mode

For each second of **10** transmission appearance,the longest time of occupancy is
10 transmission* **31.6** seconds* **0.385** ms= **121.660** ms (<400ms)


DH3 Mode


For each second of **5** transmission appearance,the longest time of occupancy is
5 transmission* **31.6** seconds* **1.635** ms= **258.330** ms (<400ms)


DH5 Mode

For each second of **2** transmission appearance,the longest time of occupancy is
2 transmission* **31.6** seconds* **2.880** ms= **182.016** ms (<400ms)

● Measurement Plots

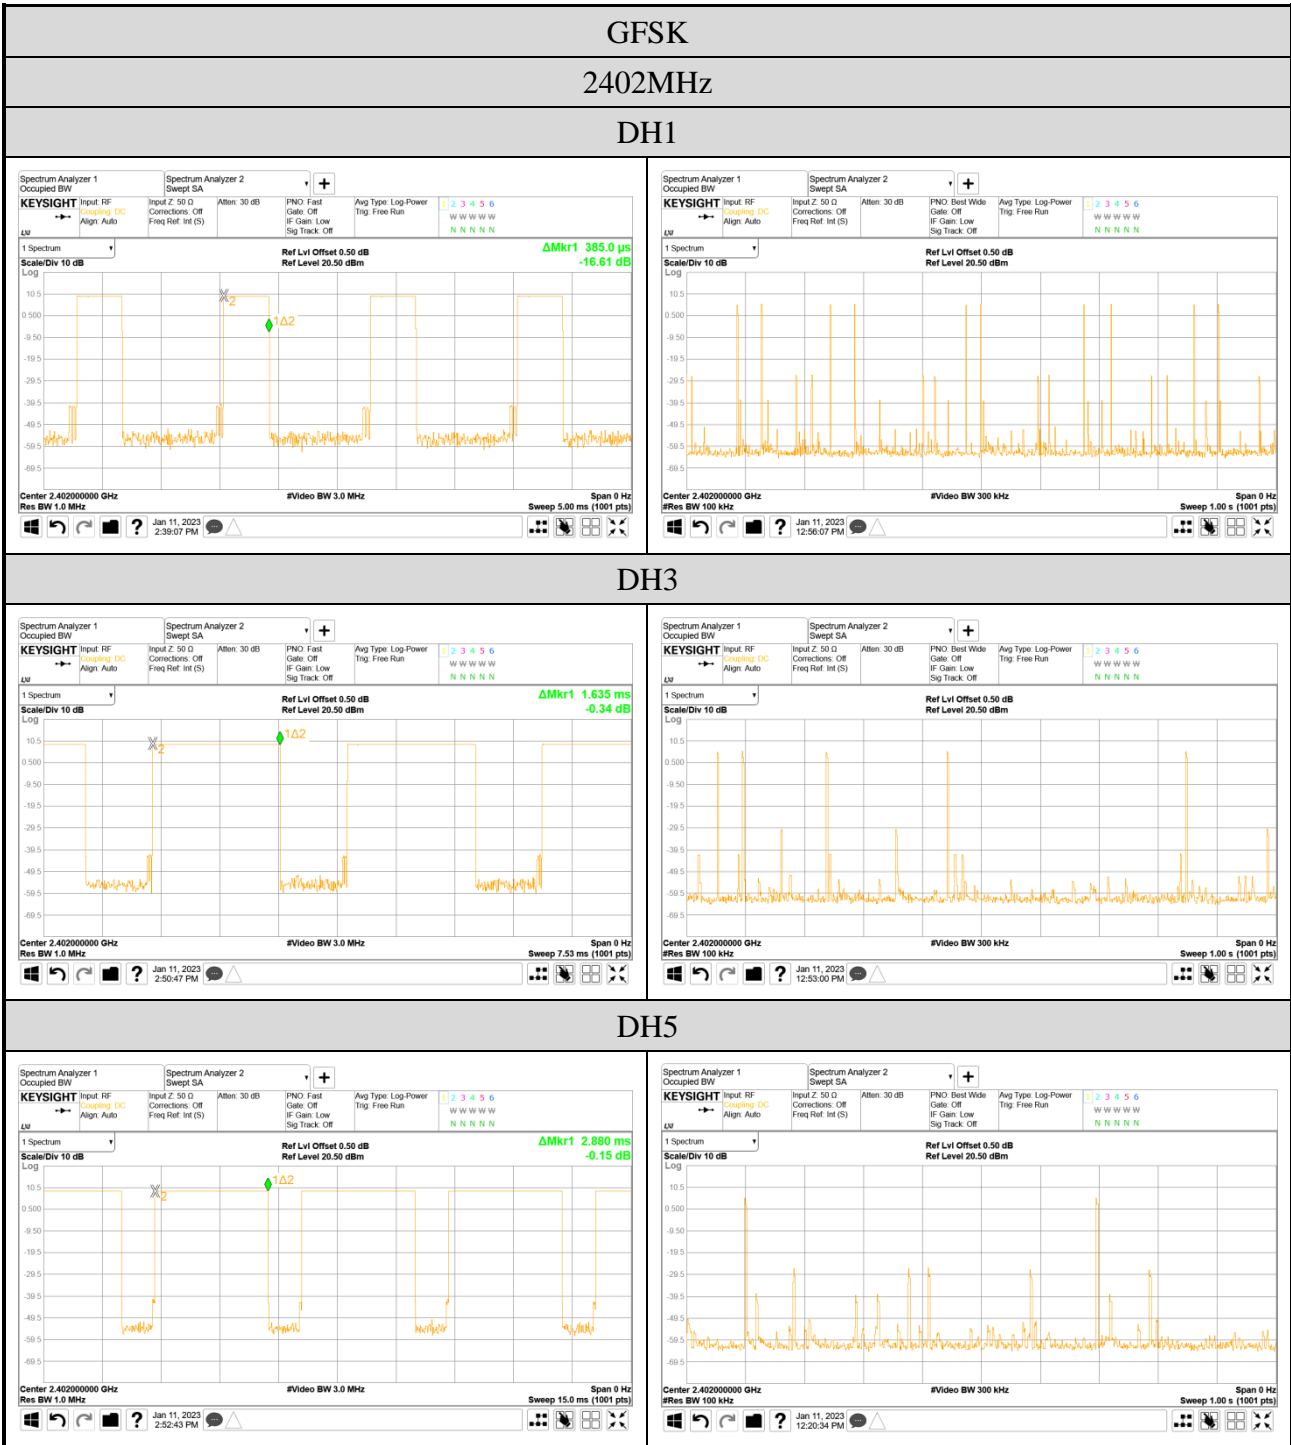

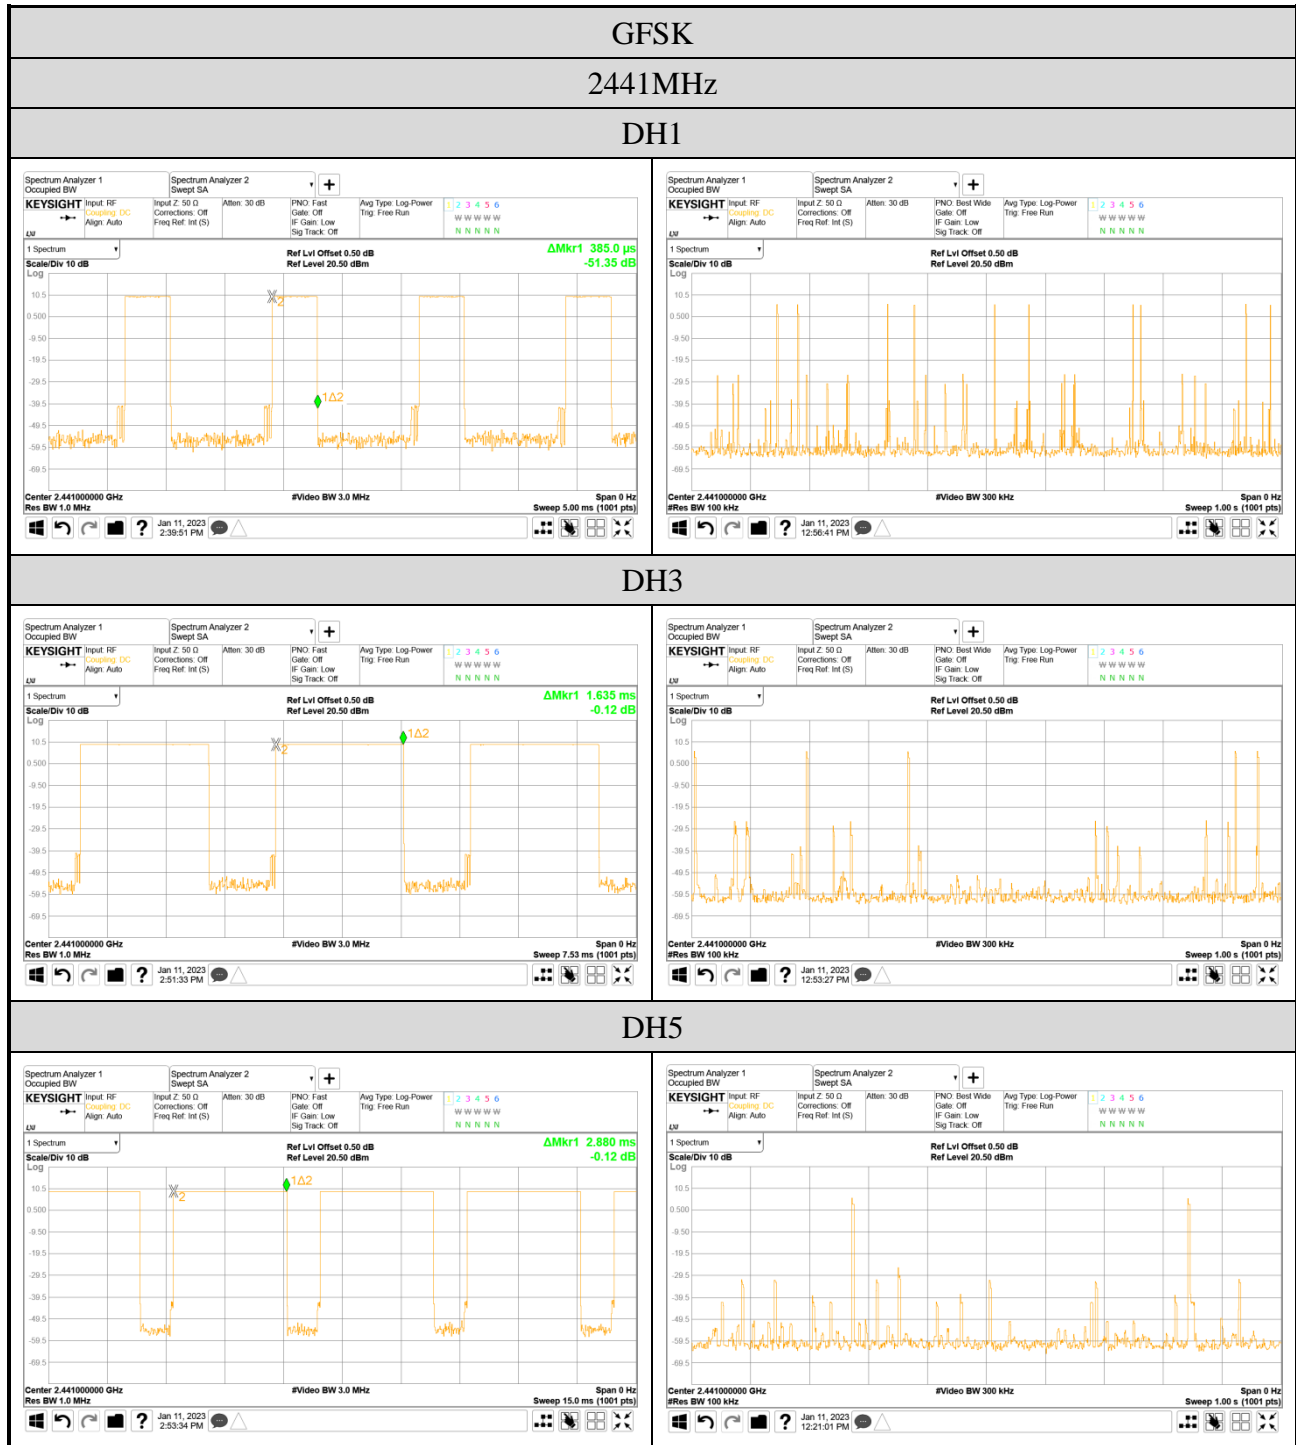

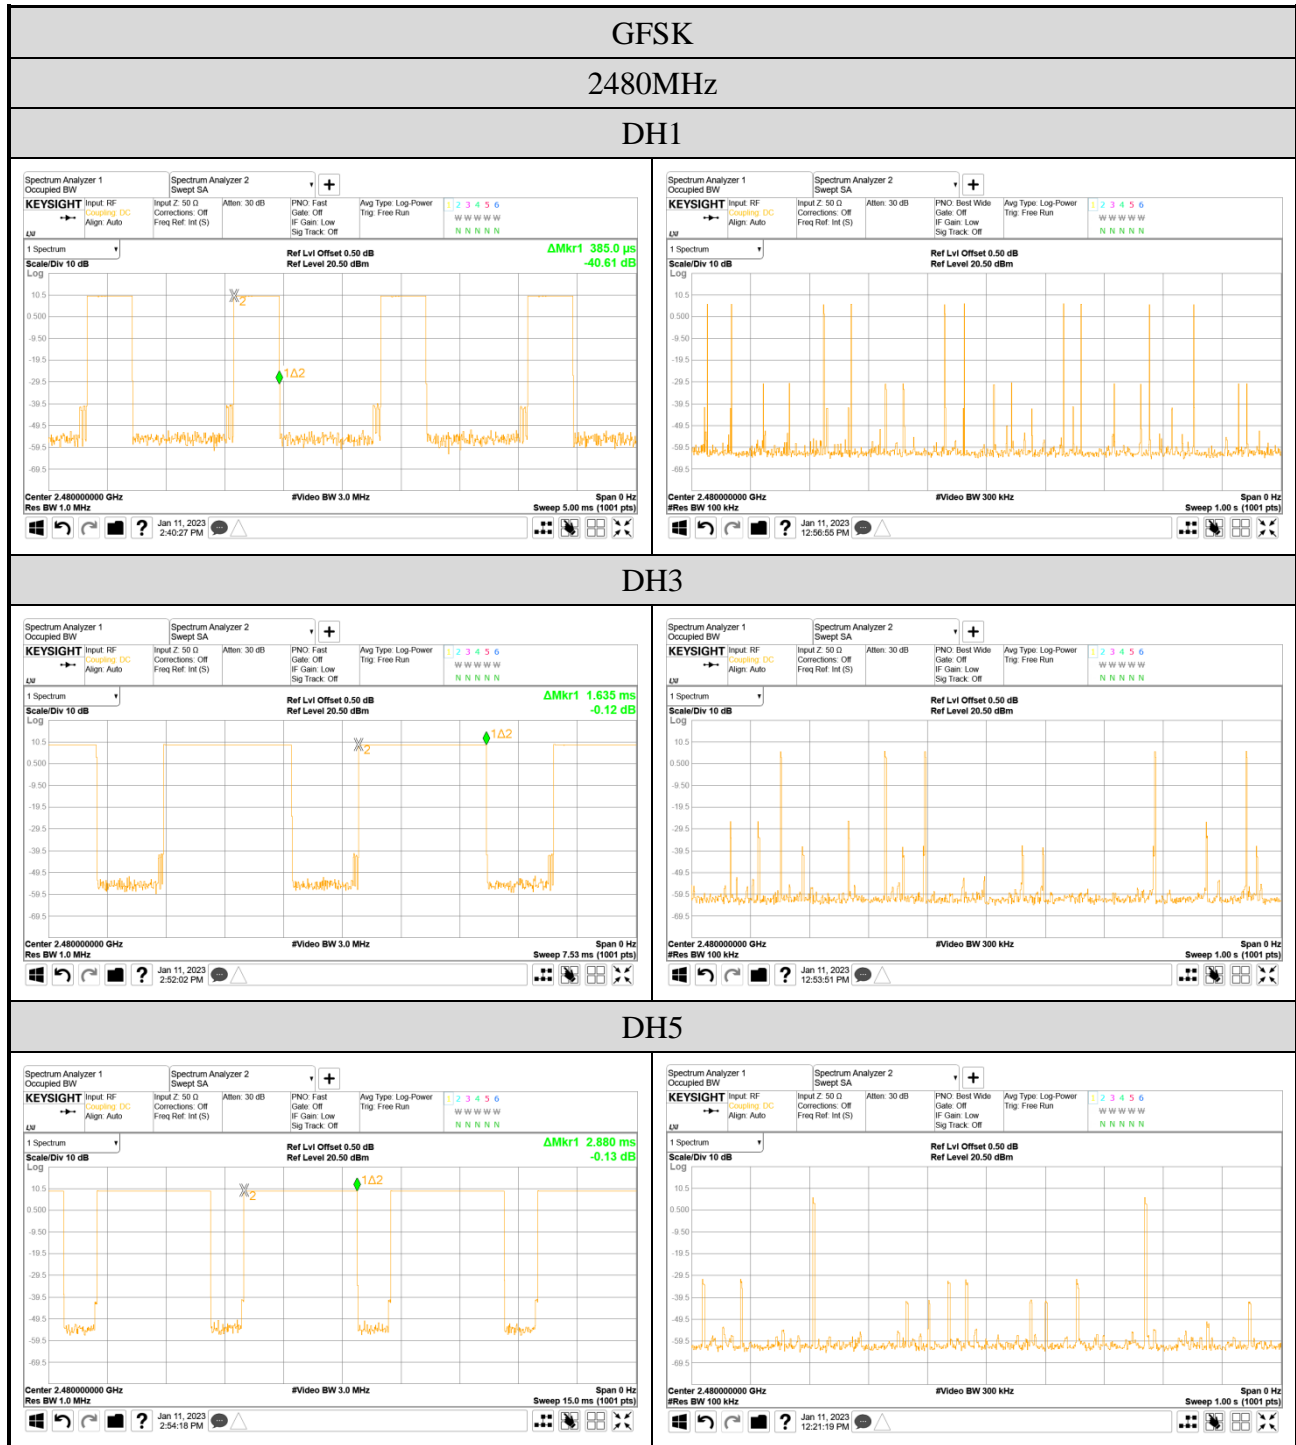

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2402	3DH1	10	0.395	124.820	<400
		3DH3	5	1.642	259.436	<400
		3DH5	2	2.895	182.964	<400

Observation Period:

$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$

3DH1 Mode

For each second of **10** transmission appearance,the longest time of occupancy is
 $10 \text{ transmission} * 31.6 \text{ seconds} * 0.395 \text{ ms} = 124.820 \text{ ms} (<400\text{ms})$

3DH3 Mode

For each second of **5** transmission appearance,the longest time of occupancy is
 $5 \text{ transmission} * 31.6 \text{ seconds} * 1.642 \text{ ms} = 259.436 \text{ ms} (<400\text{ms})$

3DH5 Mode

For each second of **2** transmission appearance,the longest time of occupancy is
 $2 \text{ transmission} * 31.6 \text{ seconds} * 2.895 \text{ ms} = 182.964 \text{ ms} (<400\text{ms})$

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2441	3DH1	10	0.395	124.820	<400
		3DH3	5	1.642	259.436	<400
		3DH5	2	2.895	182.964	<400

Observation Period:

$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$

3DH1 Mode

For each second of **10** transmission appearance,the longest time of occupancy is
 $10 \text{ transmission} * 31.6 \text{ seconds} * 0.395 \text{ ms} = 124.820 \text{ ms} (<400\text{ms})$

3DH3 Mode

For each second of **5** transmission appearance,the longest time of occupancy is
 $5 \text{ transmission} * 31.6 \text{ seconds} * 1.642 \text{ ms} = 259.436 \text{ ms} (<400\text{ms})$

3DH5 Mode

For each second of **2** transmission appearance,the longest time of occupancy is
 $2 \text{ transmission} * 31.6 \text{ seconds} * 2.895 \text{ ms} = 182.964 \text{ ms} (<400\text{ms})$

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2480	3DH1	10	0.395	124.820	<400
		3DH3	5	1.642	259.436	<400
		3DH5	2	2.895	182.964	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission * **31.6** seconds * **0.395** ms = **124.820** ms (<400ms)


3DH3 Mode

For each second of **5** transmission appearance, the longest time of occupancy is
5 transmission * **31.6** seconds * **1.642** ms = **259.436** ms (<400ms)

3DH5 Mode

For each second of **2** transmission appearance, the longest time of occupancy is
2 transmission * **31.6** seconds * **2.895** ms = **182.964** ms (<400ms)



● Measurement Plots

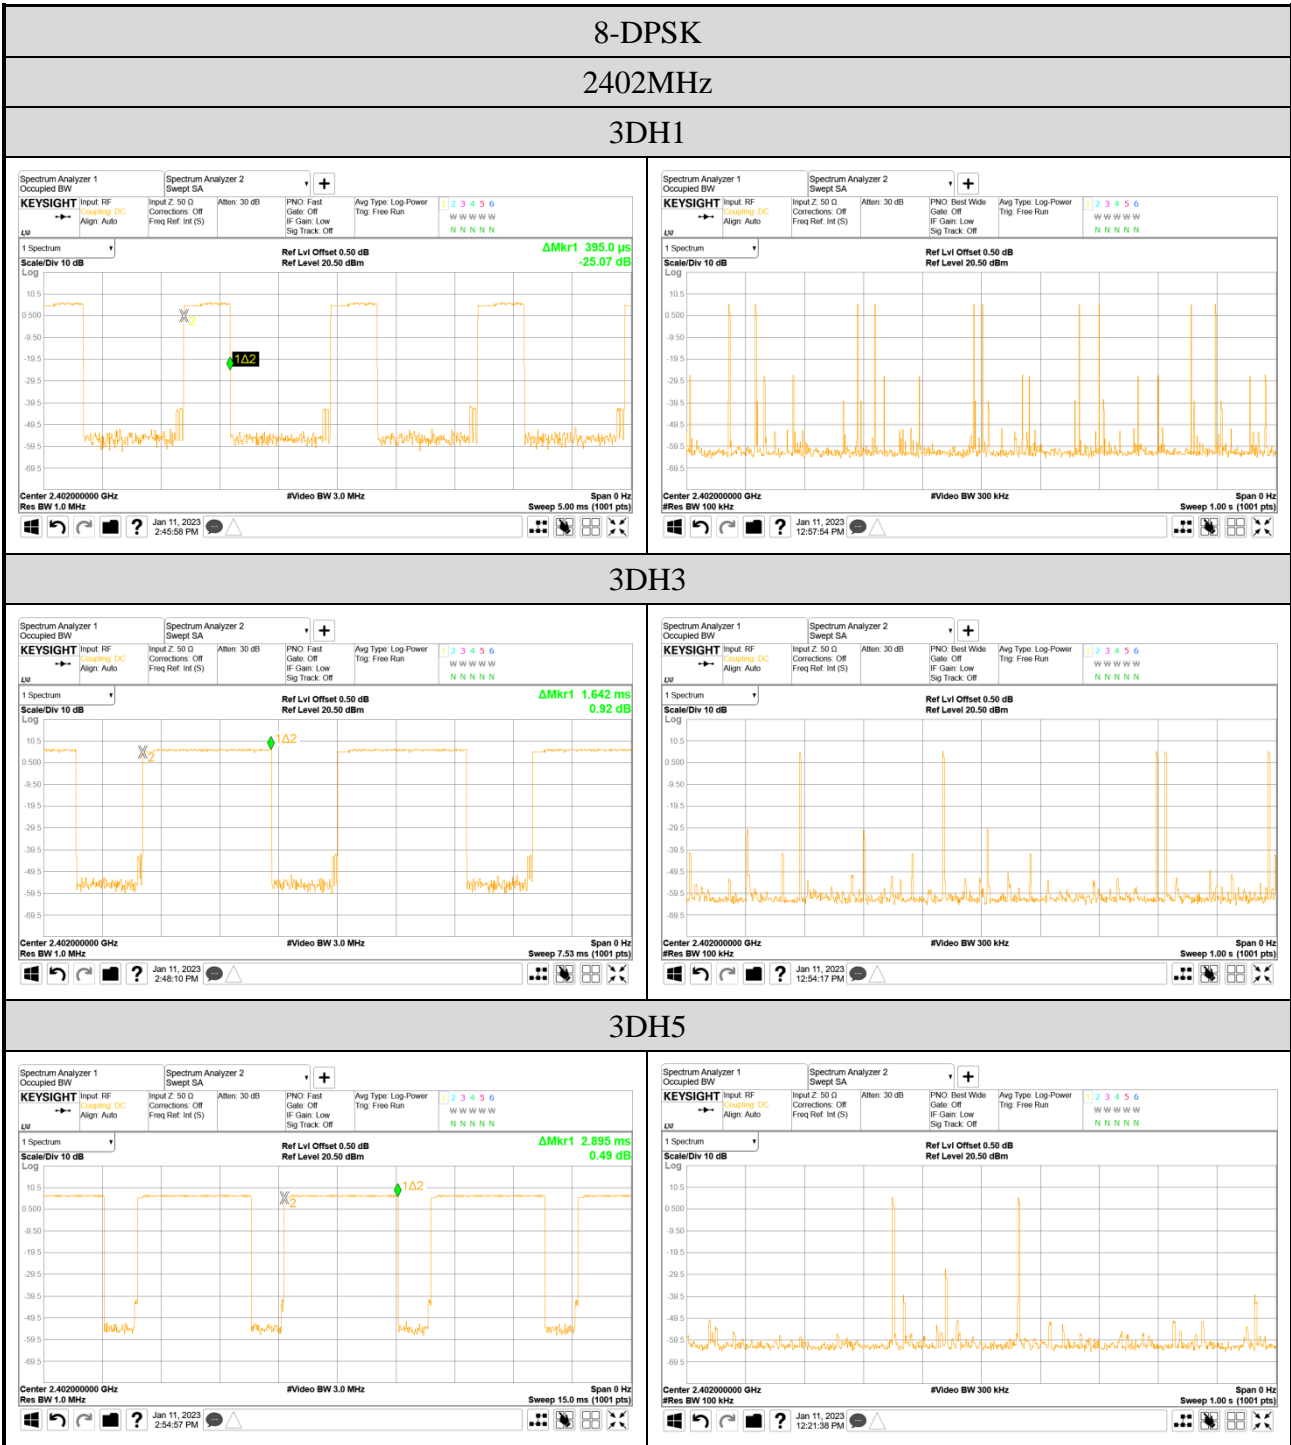


8-DPSK

2441MHz



3DH1

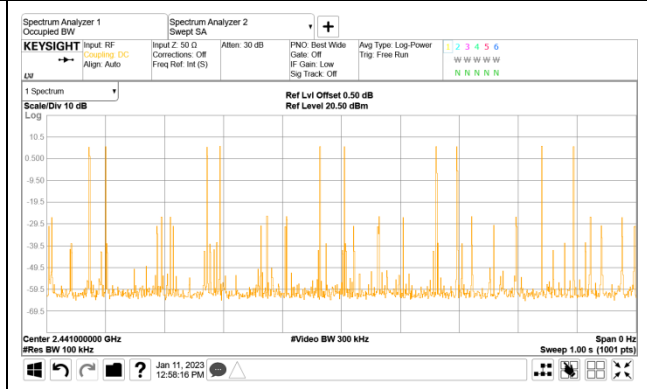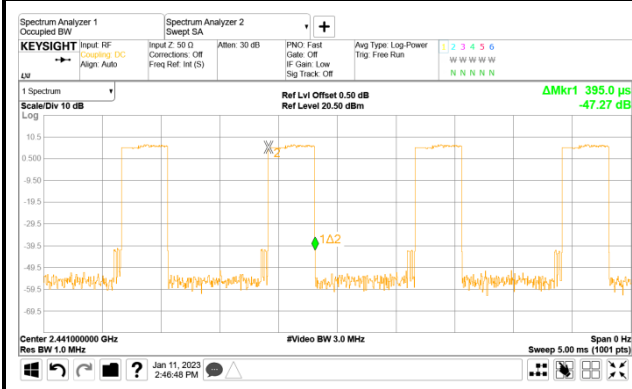

3DH3

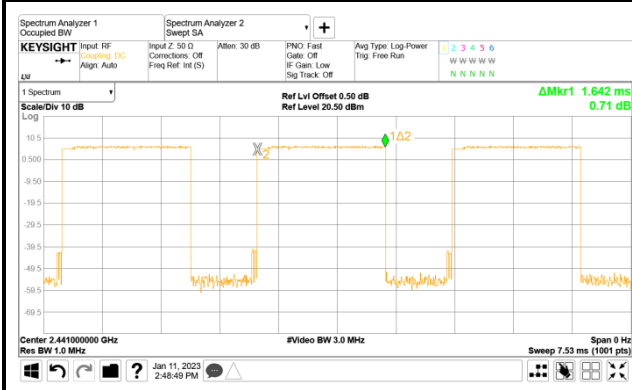



3DH5

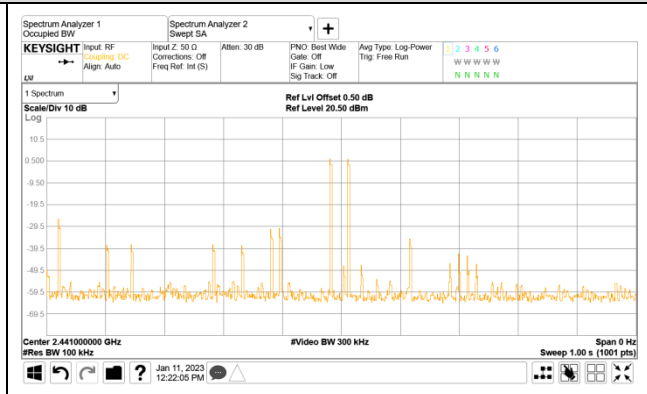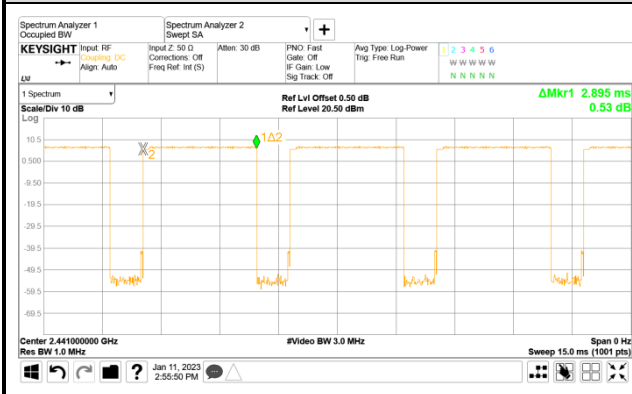



8-DPSK

2480MHz



3DH1

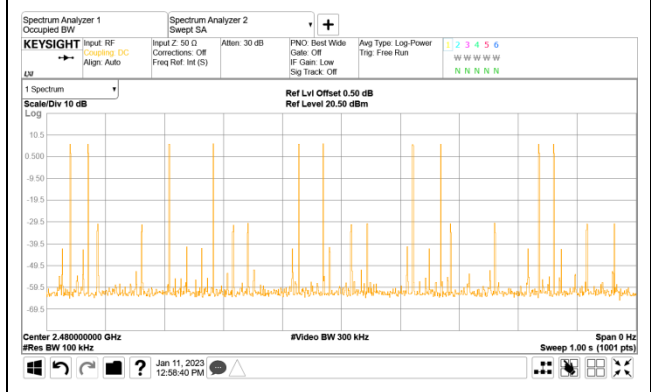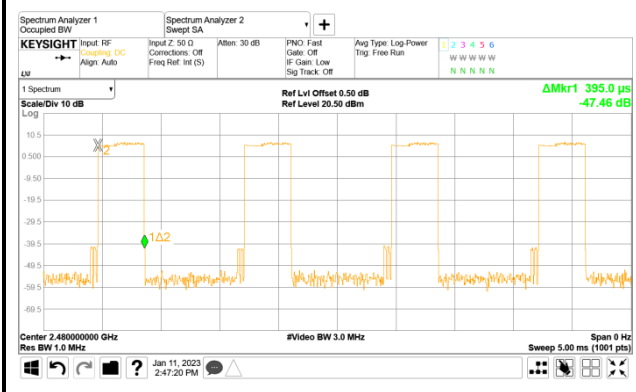

3DH3

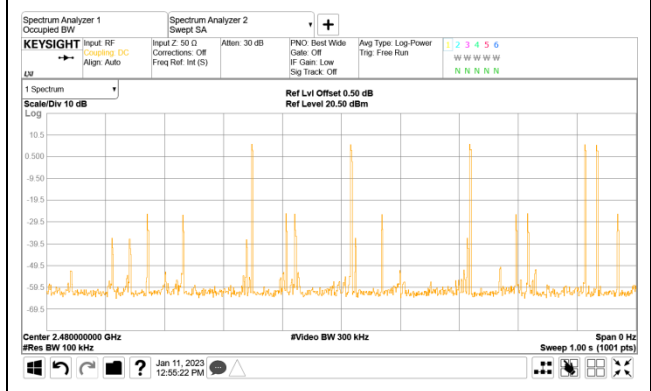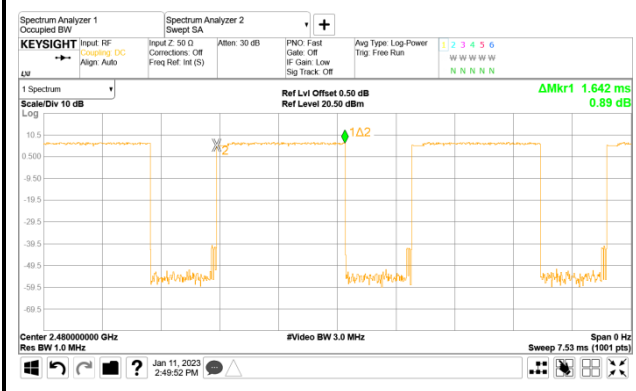

3DH5

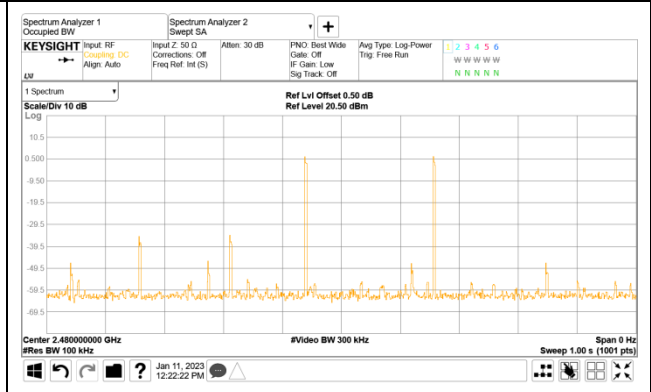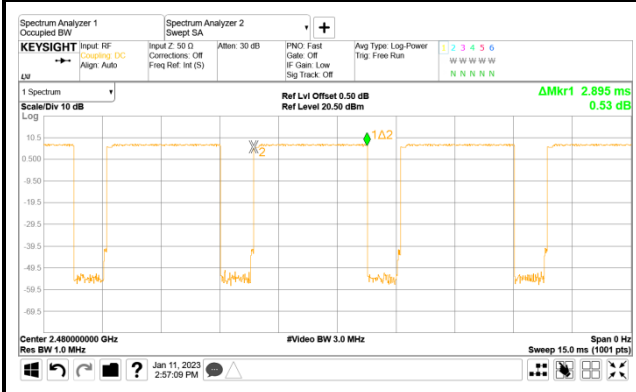

A.6 NUMBER OF HOPPING CHANNELS

Test Date	2023/01/11	Temp./Hum.	23°C/56%
Cable Loss	0.5dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

Mode: GFSK	Mode: 8-DPSK
The number hopping channel is 79.	The number hopping channel is 79.


A.7 MAXIMUM PEAK OUTPUT POWER

Test Date	2023/01/11	Temp./Hum.	23°C/56%
Cable Loss	0.5dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.7.1 Maximum Peak Output Power

Mode	Centre Frequency (MHz)	Maximum Peak Output Power		Limit
		dBm	W	
GFSK	2402	9.54	0.009	21dBm (0.125W)
	2441	9.84	0.010	
	2480	10.08	0.010	
8-DPSK	2402	7.47	0.006	
	2441	7.92	0.006	
	2480	8.22	0.007	


A.7.2 Measurement Plots

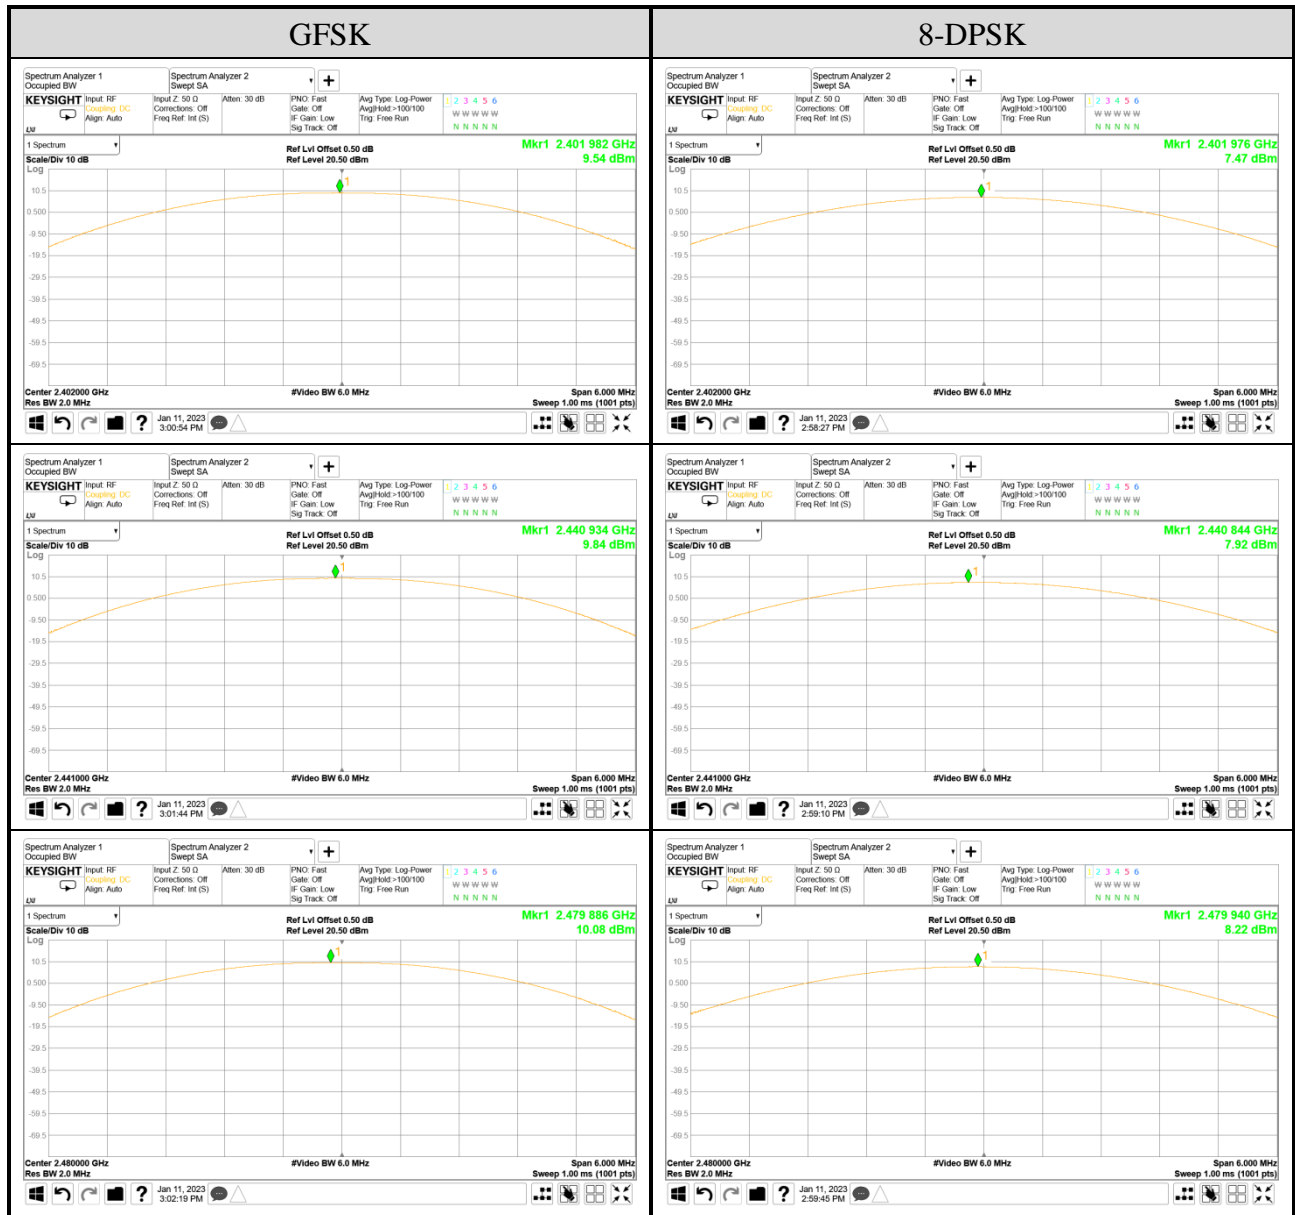


A.8 EMISSION LIMITATIONS MEASUREMENT


Test Date	2023/01/11	Temp./Hum.	23°C/56%
Cable Loss	0.5dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.8.1 Band Edge

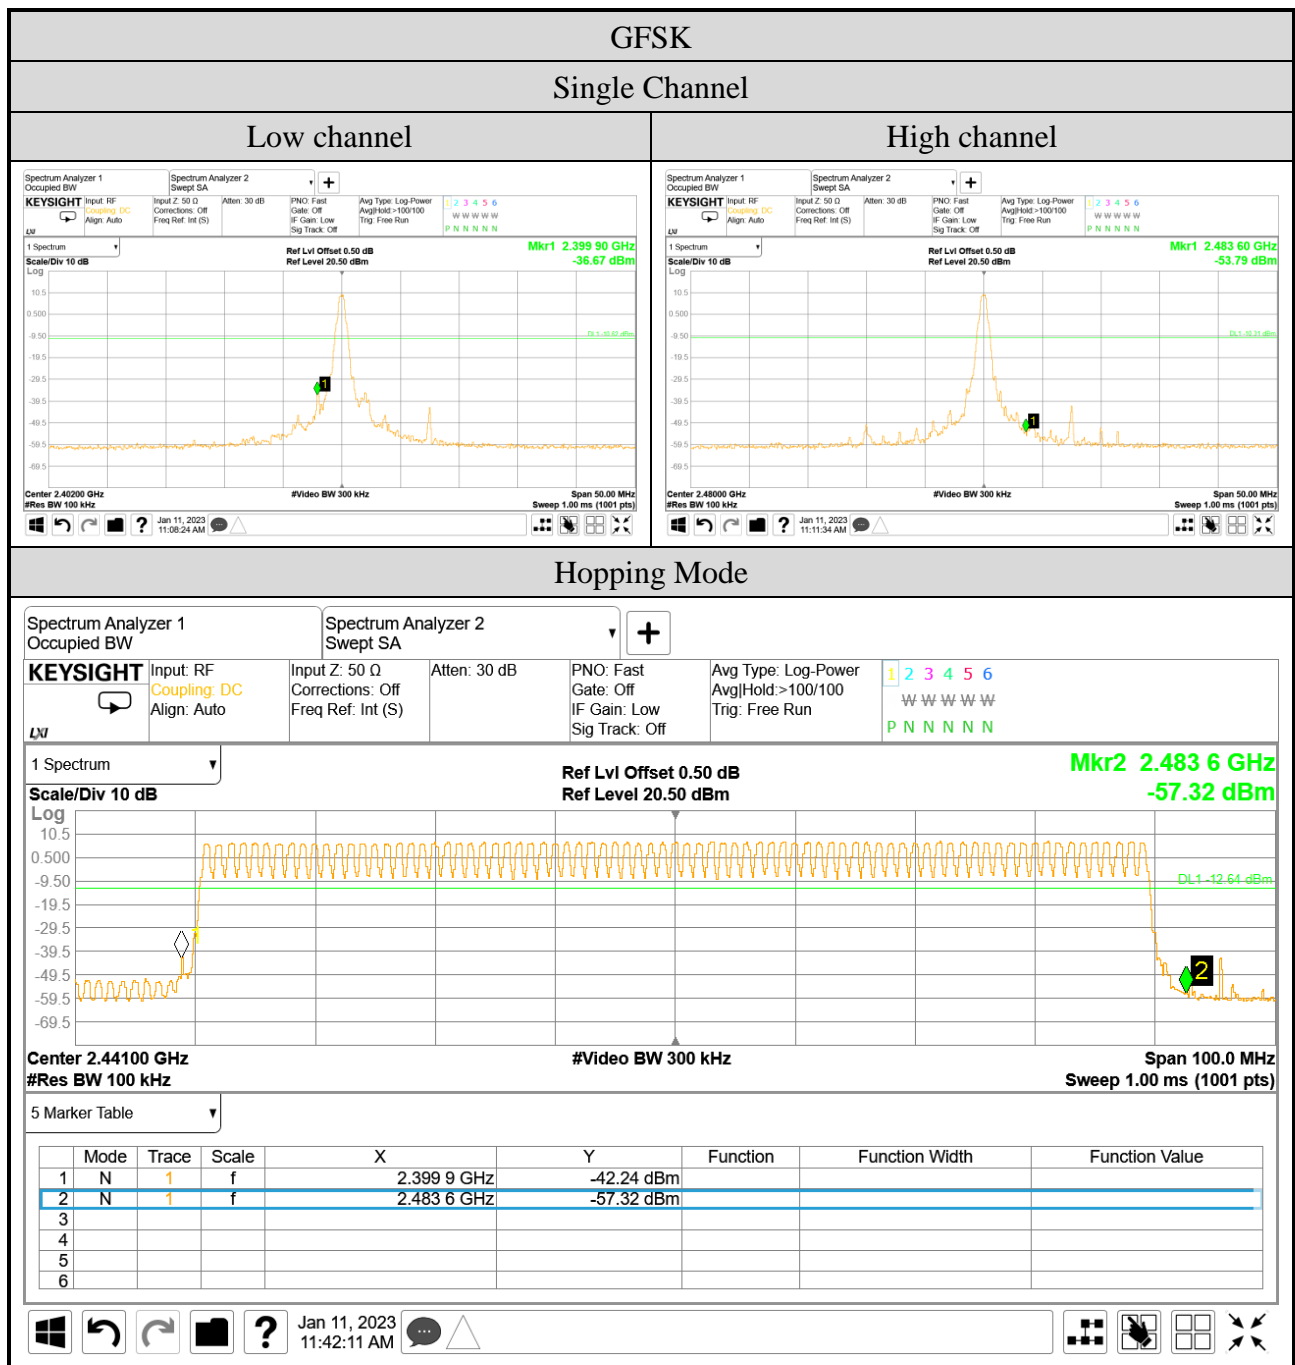


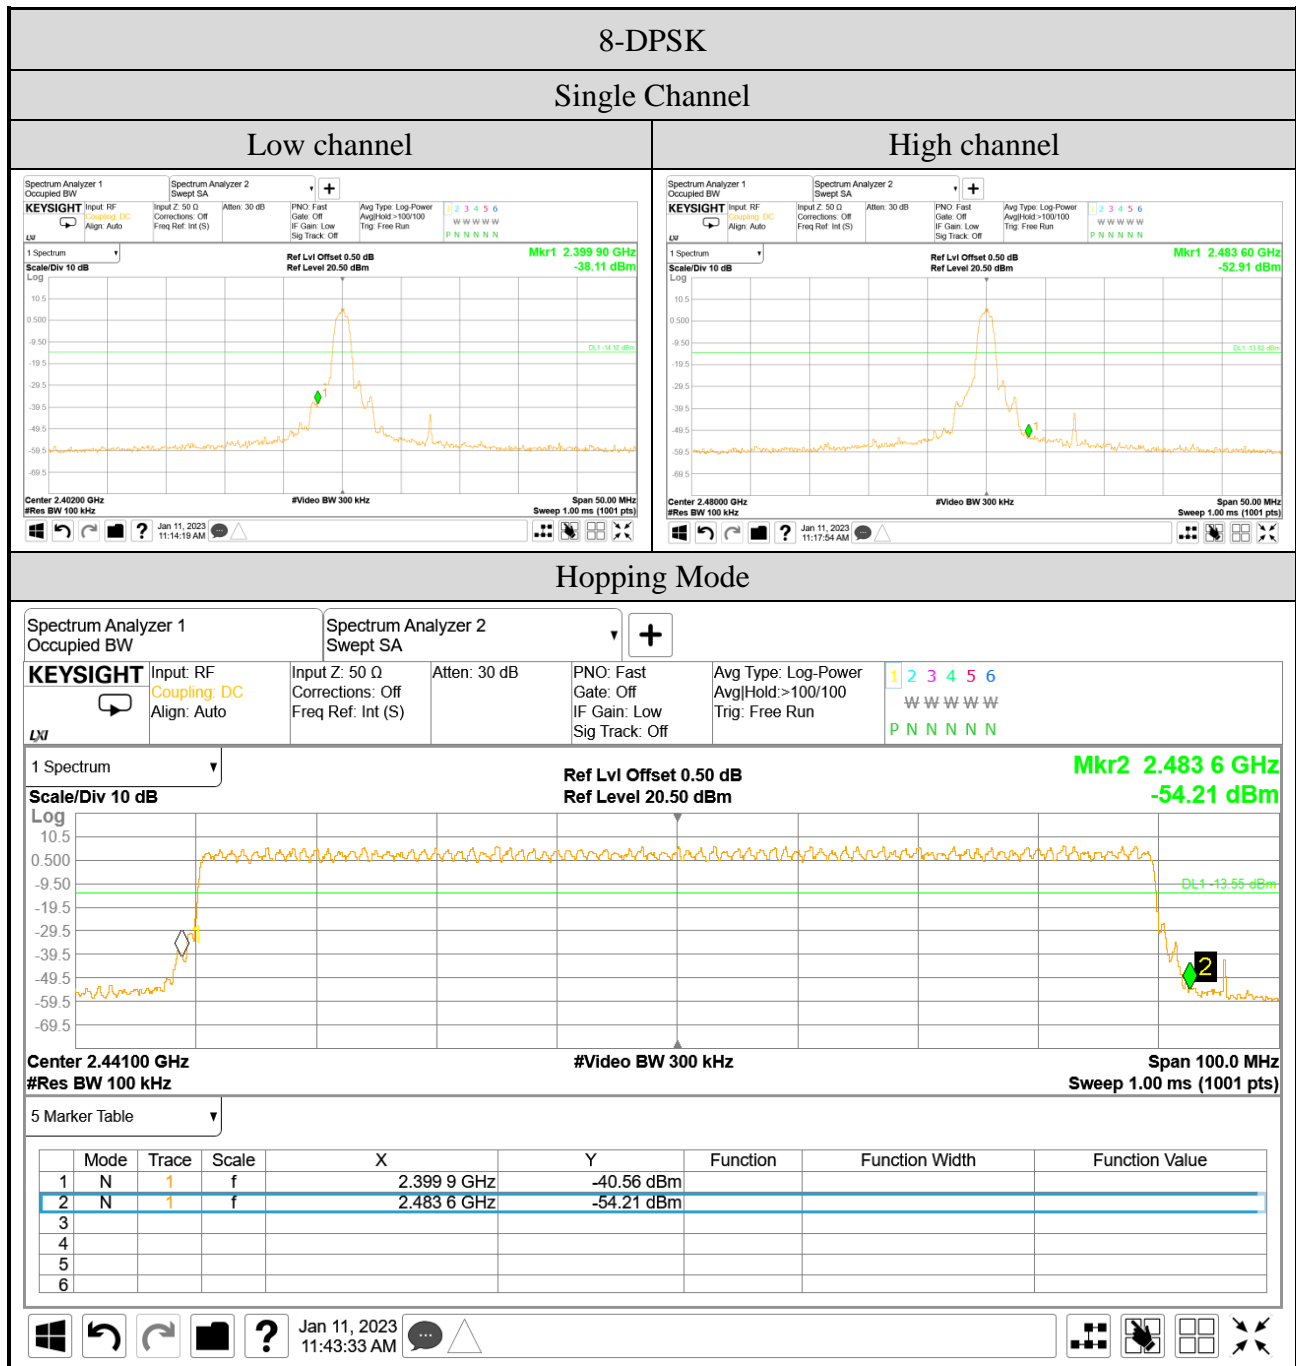

A.8.2 Spurious Emission

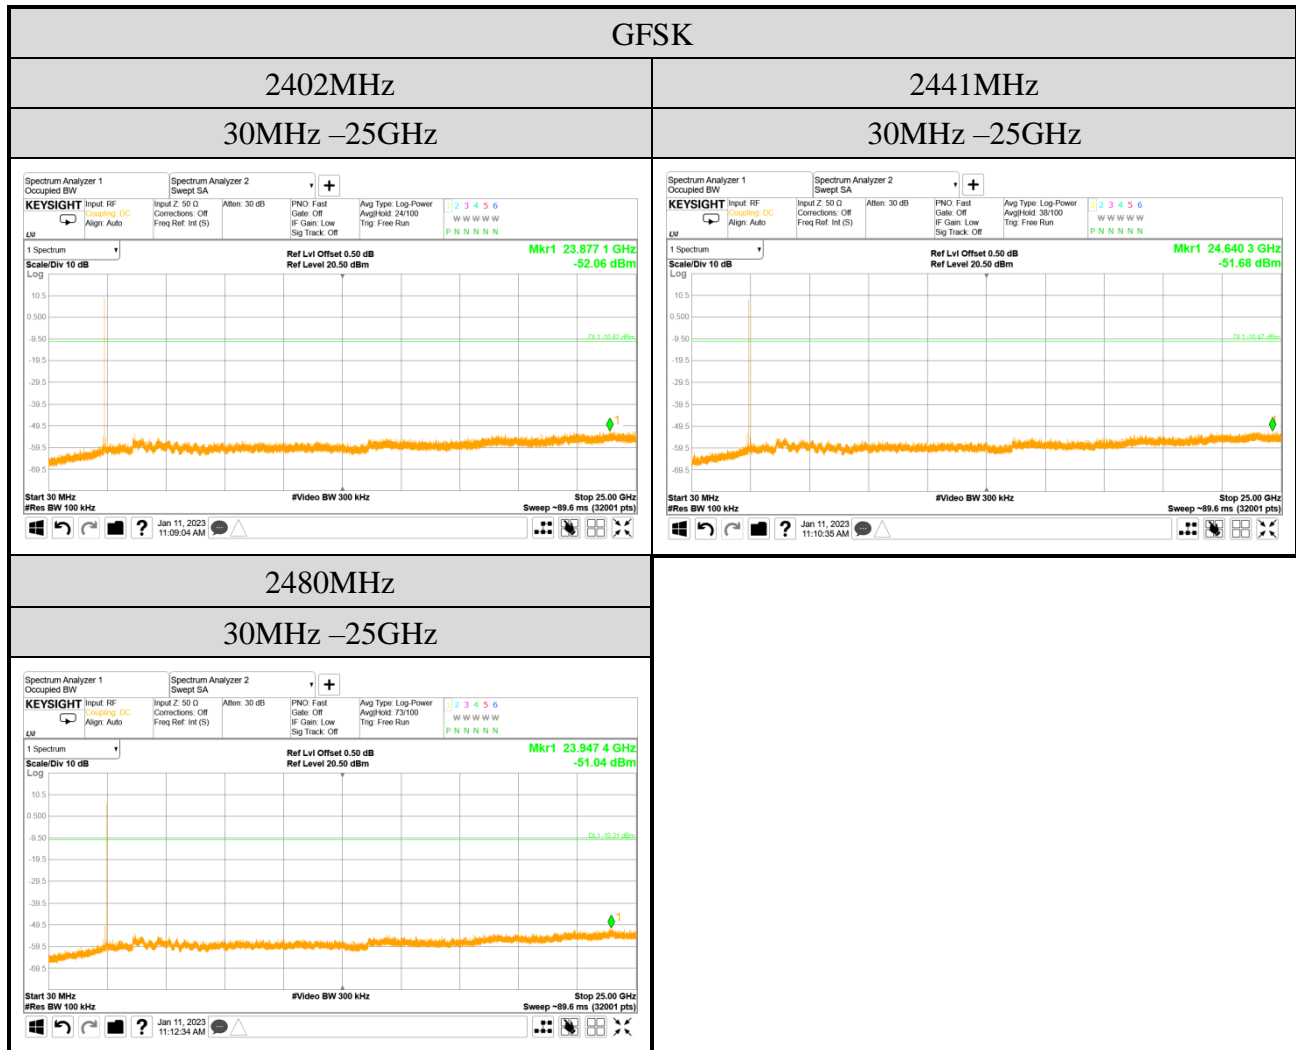

Note: All results have been included cable loss.

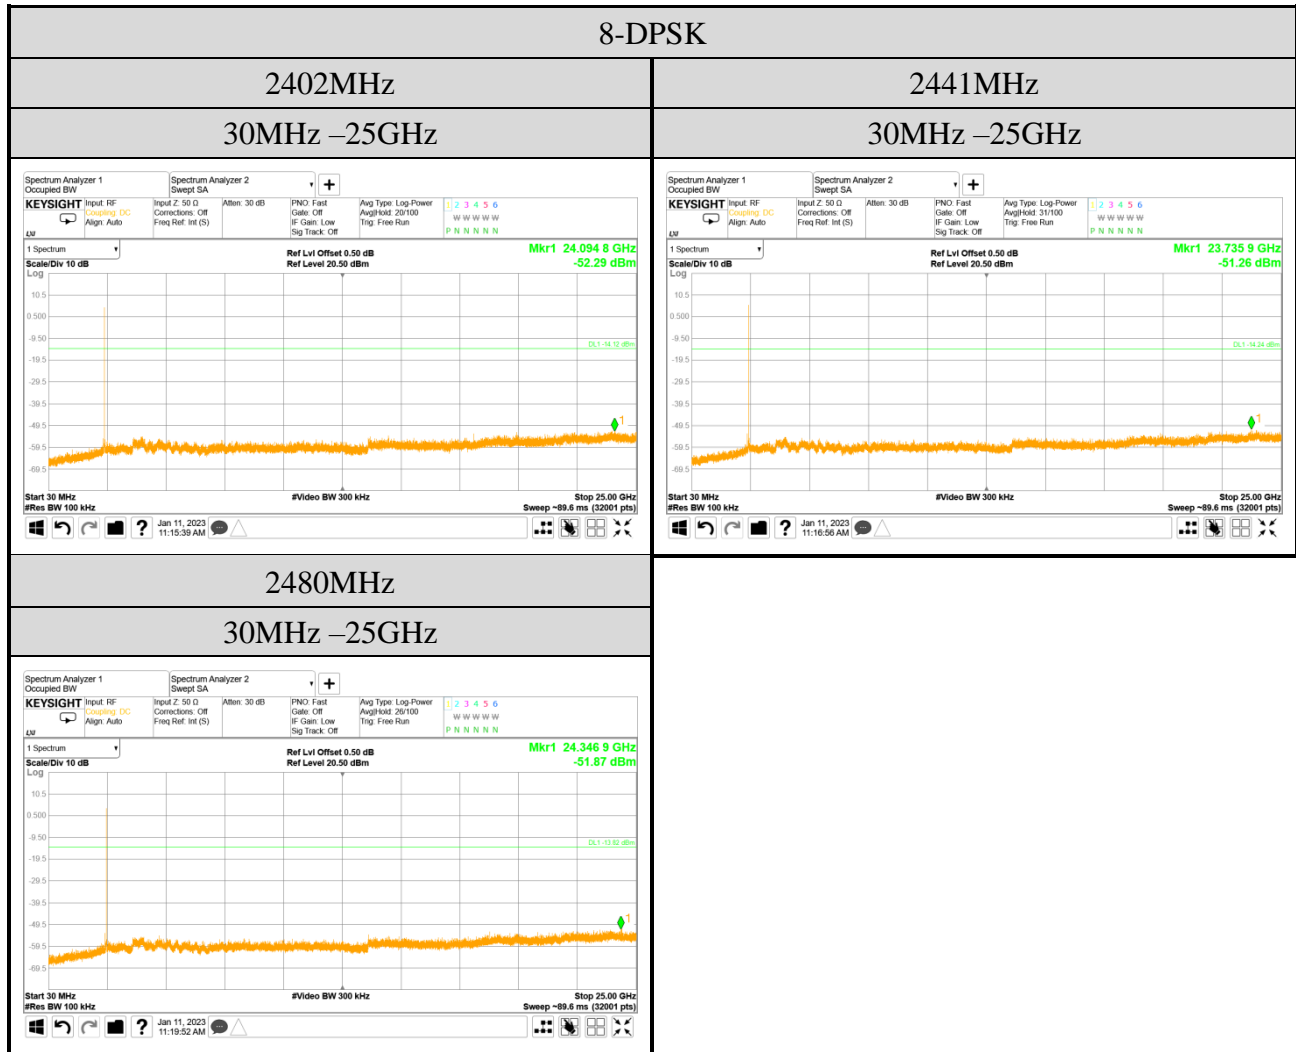

Note: All results have been included cable loss.