

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	90
A.2.3 Emissions in Non-restricted Frequency Bands:.....	93
A.3 DTS/OCCUPIED BANDWIDTH	94
A.3.1 DTS/Occupied Bandwidth Result.....	94
A.3.2 Measurement Plots	96
A.4 MAXIMUM PEAK OUTPUT POWER	112
A.4.1 Peak Output Power	112
A.4.2 Average Output Power (Reporting only).....	116
A.4.3 Measurement Plots	119
A.5 EMISSION LIMITATIONS	121
A.6 POWER SPECTRAL DENSITY	147
A.6.1 Power Spectral Density Result	147
A.6.2 Measurement Plots	150

A.1 CONDUCTED EMISSION

Test Date	2023/02/08	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Joe kuo

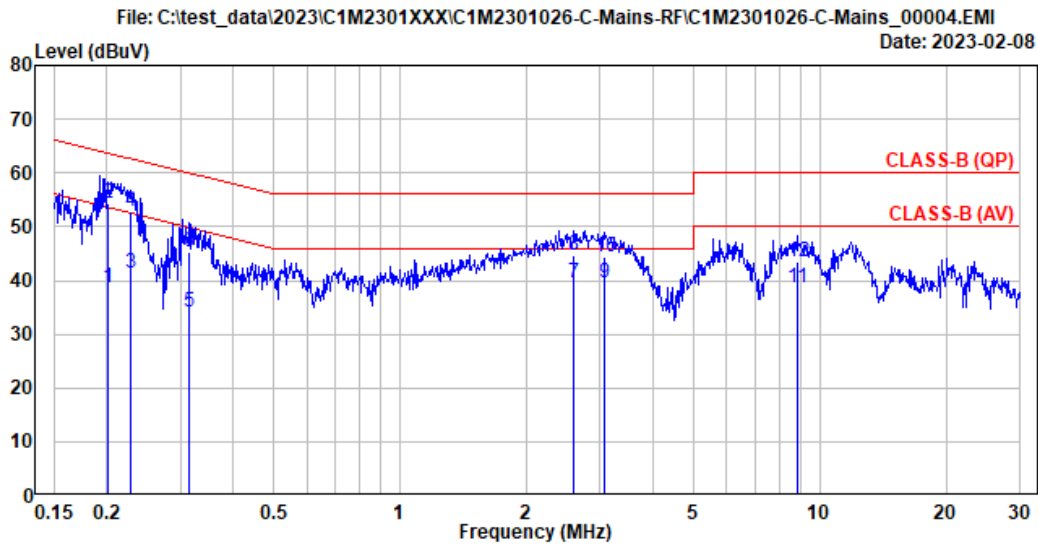

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 23°C/60%	Test Rating	: 120Vac/60Hz
EUT Model	: 15Z90RT	Engineer	: Joe_Kuo
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.201	10.32	0.03	9.85	18.32	38.52	53.56	15.04	Average
2	0.201	10.32	0.03	9.85	34.08	54.28	63.56	9.28	QP
3	0.229	10.32	0.03	9.85	21.23	41.43	52.48	11.05	Average
4	0.229	10.32	0.03	9.85	32.57	52.77	62.48	9.71	QP
5	0.315	10.32	0.03	9.85	13.93	34.13	49.83	15.70	Average
6	0.315	10.32	0.03	9.85	25.06	45.26	59.83	14.57	QP
7	2.596	10.38	0.07	9.86	19.35	39.66	46.00	6.34	Average
8	2.596	10.38	0.07	9.86	24.51	44.82	56.00	11.18	QP
9	3.060	10.38	0.07	9.86	19.31	39.62	46.00	6.38	Average
10	3.060	10.38	0.07	9.86	24.05	44.36	56.00	11.64	QP
11	8.847	10.60	0.13	9.88	17.91	38.52	50.00	11.48	Average
12	8.847	10.60	0.13	9.88	22.77	43.38	60.00	16.62	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2023/02/08	Temp./Hum.	23°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Joe kuo

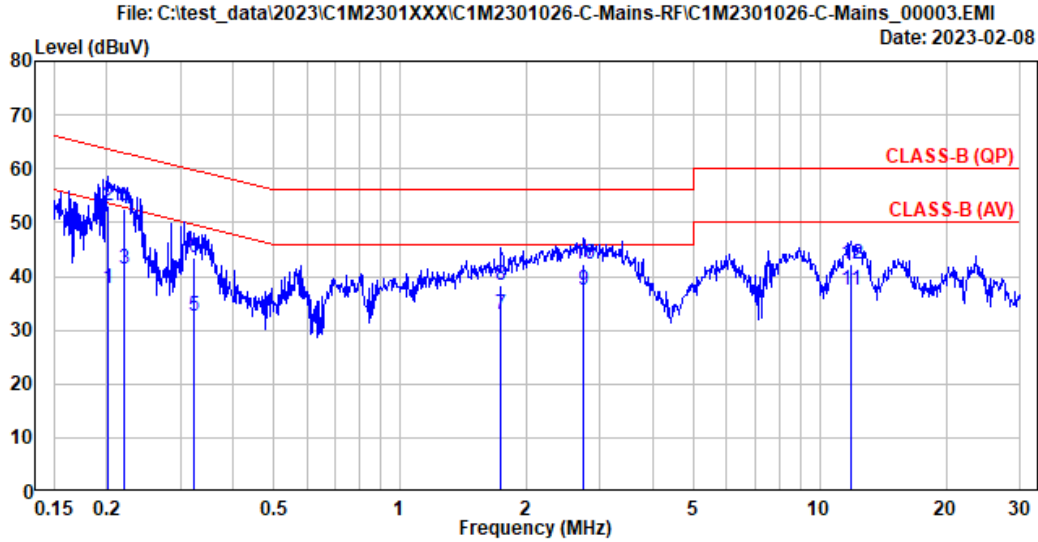

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 23°C/60%	Test Rating	: 120Vac/60Hz
EUT Model	: 15Z90RT	Engineer	: Joe_Kuo
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.202	10.22	0.03	9.85	17.67	37.77	53.52	15.75	Average
2	0.202	10.22	0.03	9.85	33.07	53.17	63.52	10.35	QP
3	0.220	10.22	0.03	9.85	21.13	41.23	52.81	11.58	Average
4	0.220	10.22	0.03	9.85	32.37	52.47	62.81	10.34	QP
5	0.322	10.22	0.03	9.85	12.46	32.56	49.67	17.11	Average
6	0.322	10.22	0.03	9.85	23.50	43.60	59.67	16.07	QP
7	1.742	10.25	0.06	9.86	12.81	32.98	46.00	13.02	Average
8	1.742	10.25	0.06	9.86	18.25	38.42	56.00	17.58	QP
9	2.742	10.26	0.07	9.86	17.21	37.40	46.00	8.60	Average
10	2.742	10.26	0.07	9.86	22.19	42.38	56.00	13.62	QP
11	11.871	10.47	0.15	9.90	16.76	37.28	50.00	12.72	Average
12	11.871	10.47	0.15	9.90	21.63	42.15	60.00	17.85	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2023/02/01 ~ 08	Temp./Hum.	17 ~ 20°C/63 ~ 77%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.88	1.46	26.49	33.82	31.68	40.00	8.32	Peak
113.420	17.66	2.78	26.20	32.34	26.58	43.50	16.92	Peak
155.130	16.60	3.25	25.97	39.62	33.50	43.50	10.00	Peak
372.410	21.03	5.62	26.23	32.27	32.69	46.00	13.31	Peak
464.560	22.88	6.49	26.90	32.18	34.64	46.00	11.36	Peak
554.770	24.00	6.95	27.28	32.13	35.79	46.00	10.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.88	1.46	0.00	14.51	38.86	40.00	1.14	QP
50.370	14.10	1.84	26.46	48.67	38.15	40.00	1.85	Peak
150.280	16.87	3.20	26.00	38.64	32.72	43.50	10.78	Peak
360.770	20.80	5.49	26.14	31.63	31.77	46.00	14.23	Peak
440.310	22.43	6.29	26.74	32.50	34.47	46.00	11.53	Peak
561.560	24.06	6.98	27.30	31.49	35.23	46.00	10.77	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.08	1.43	26.49	34.45	32.48	40.00	7.52	Peak
112.450	17.61	2.76	26.21	33.21	27.37	43.50	16.13	Peak
158.040	16.42	3.28	25.96	38.80	32.54	43.50	10.96	Peak
372.410	21.03	5.62	26.23	31.77	32.20	46.00	13.80	Peak
490.750	23.33	6.69	27.07	32.96	35.91	46.00	10.09	Peak
623.640	24.48	7.23	27.41	32.05	36.36	46.00	9.64	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	22.50	1.50	0.00	14.20	38.20	40.00	1.80	QP
50.370	14.10	1.84	26.46	48.50	37.98	40.00	2.02	Peak
149.310	16.94	3.19	26.00	38.04	32.17	43.50	11.33	Peak
289.960	19.15	4.61	25.63	30.74	28.88	46.00	17.12	Peak
431.580	22.25	6.21	26.67	33.61	35.40	46.00	10.60	Peak
540.220	23.86	6.90	27.24	32.64	36.16	46.00	9.84	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

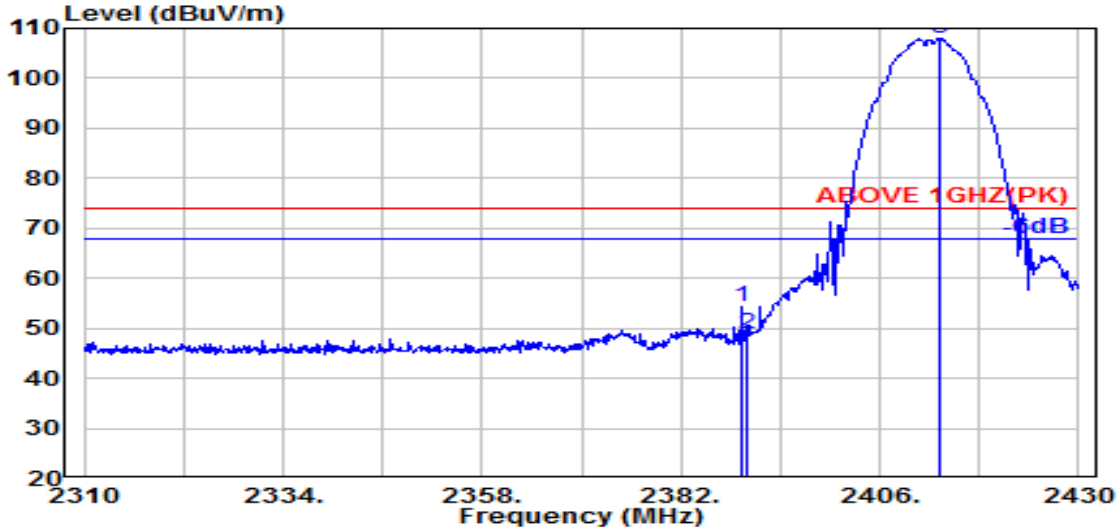

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	32.00	5.72	34.51	51.03	54.24	74.00	19.76	Peak
2390.000	32.00	5.72	34.51	45.78	48.99	74.00	25.01	Peak
@ 2413.100	32.00	5.76	34.51	104.67	107.92	---	---	Peak

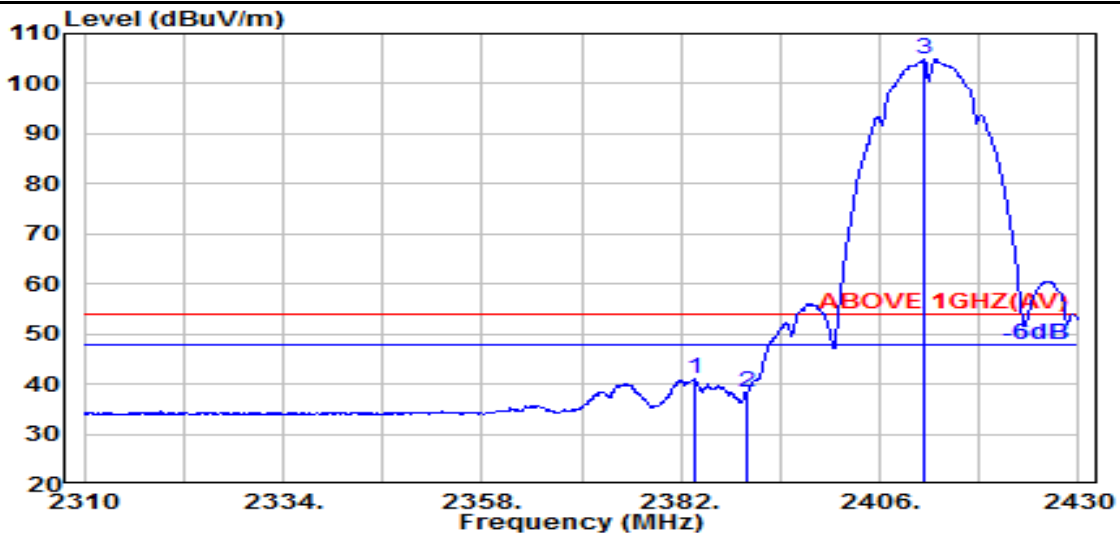


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.600	32.00	5.71	34.51	37.69	40.90	54.00	13.10	Average
2390.000	32.00	5.72	34.51	35.20	38.42	54.00	15.58	Average
@ 2411.200	32.00	5.76	34.51	101.54	104.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

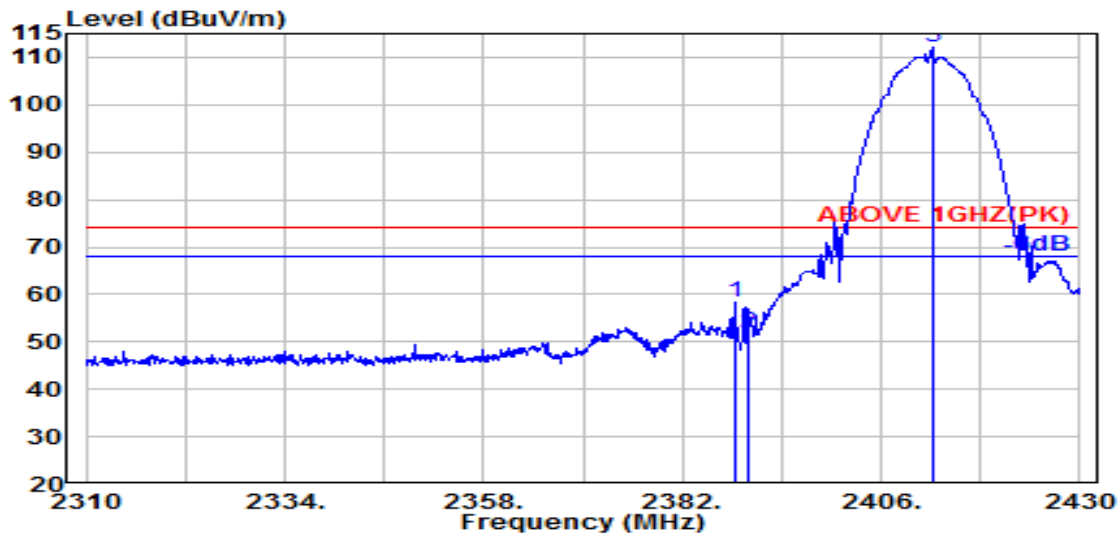

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	32.00	5.72	34.51	55.08	58.29	74.00	15.71	Peak
2390.000	32.00	5.72	34.51	48.75	51.97	74.00	22.03	Peak
@ 2412.200	32.00	5.76	34.51	108.79	112.04	---	---	Peak

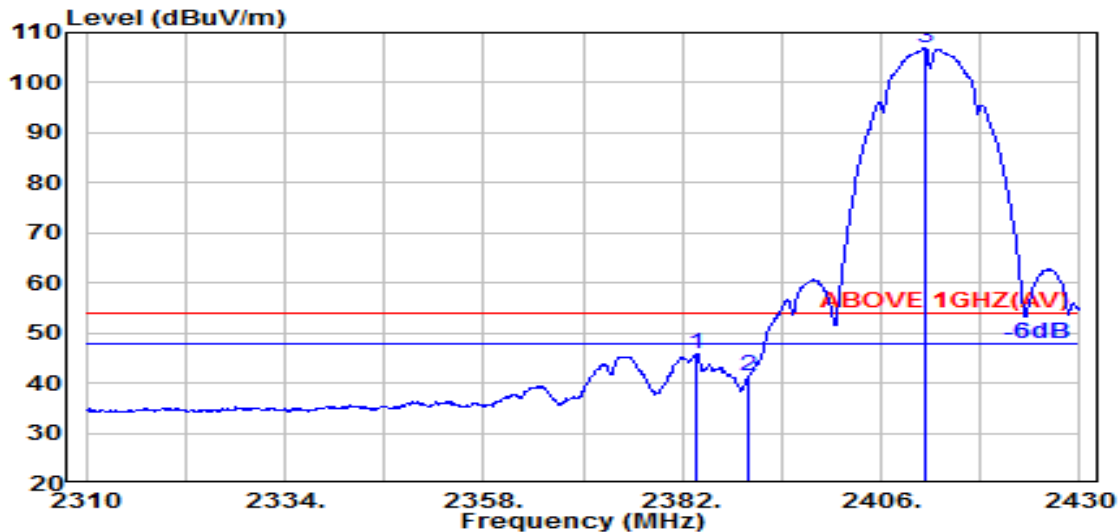


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.800	32.00	5.71	34.51	42.46	45.67	54.00	8.33	Average
2390.000	32.00	5.72	34.51	38.11	41.33	54.00	12.67	Average
@ 2411.300	32.00	5.76	34.51	103.76	107.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

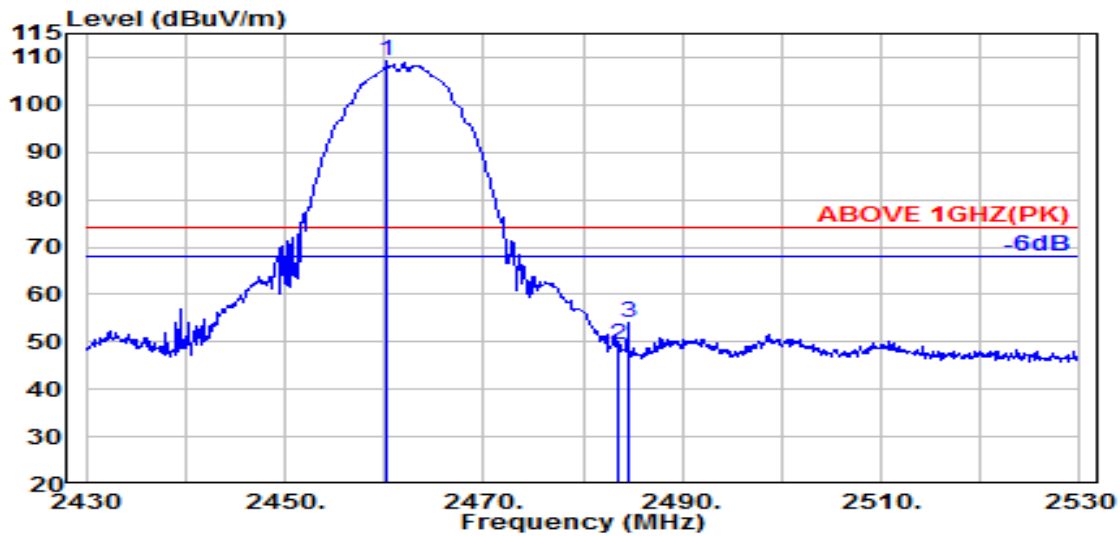

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.300	32.12	5.83	34.52	105.78	109.21	---	---	Peak
2483.500	32.40	5.87	34.53	45.54	49.28	74.00	24.72	Peak
2484.600	32.42	5.87	34.53	50.37	54.13	74.00	19.87	Peak

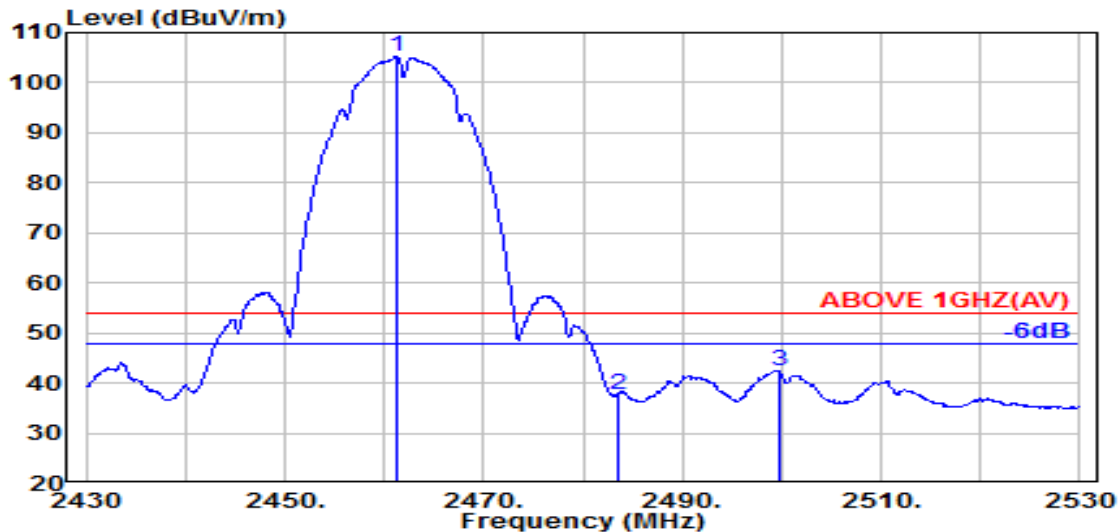


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	32.14	5.83	34.52	101.80	105.25	---	---	Average
2483.500	32.40	5.87	34.53	33.88	37.62	54.00	16.38	Average
2499.700	32.60	5.89	34.53	38.51	42.47	54.00	11.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

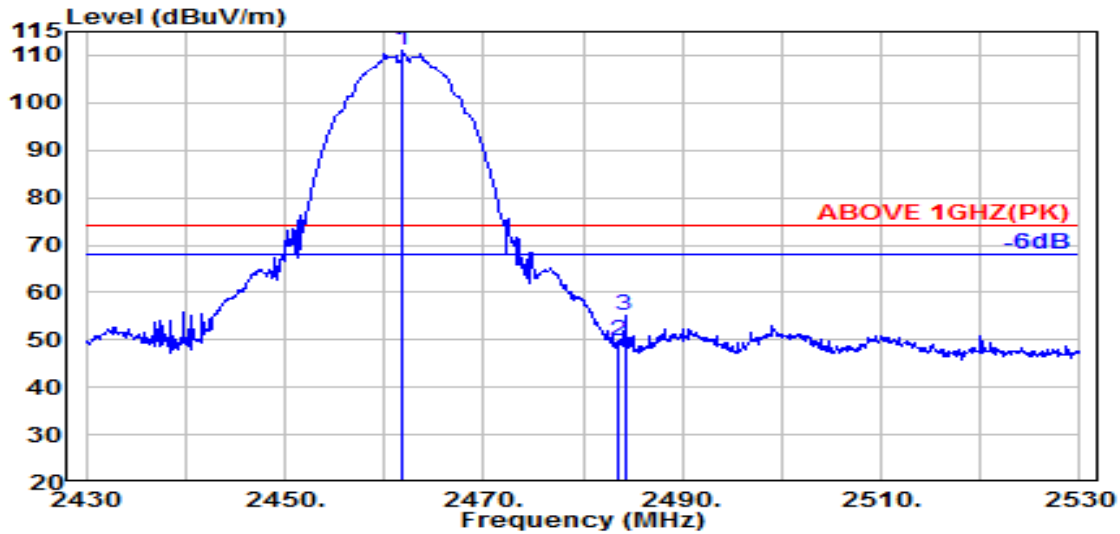

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.900	32.14	5.83	34.52	107.58	111.04	---	---	Peak
2483.500	32.40	5.87	34.53	46.02	49.76	74.00	24.24	Peak
2484.200	32.41	5.87	34.53	51.33	55.08	74.00	18.92	Peak

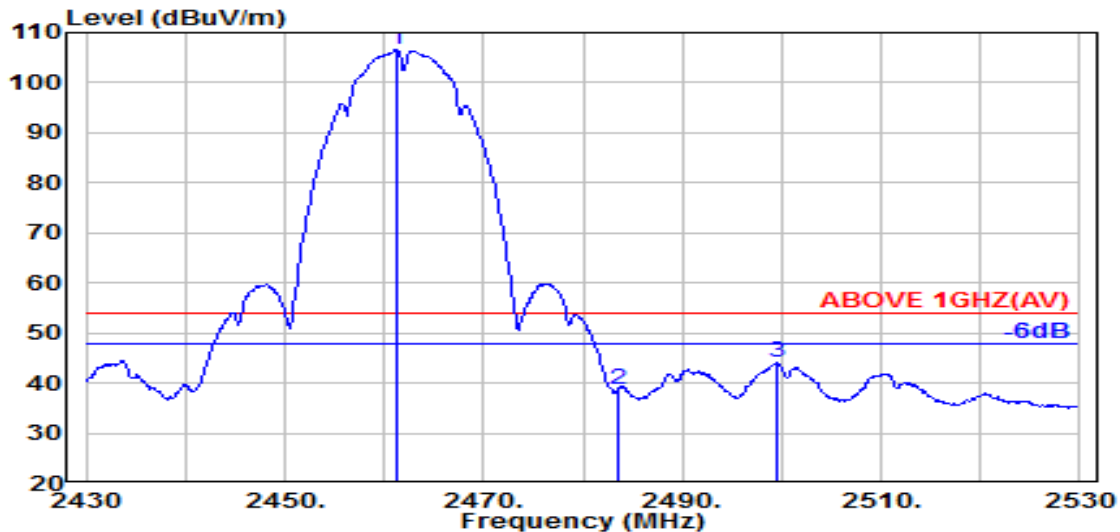


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	32.14	5.83	34.52	103.20	106.65	---	---	Average
2483.500	32.40	5.87	34.53	34.78	38.52	54.00	15.48	Average
2499.600	32.60	5.89	34.53	40.15	44.10	54.00	9.90	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

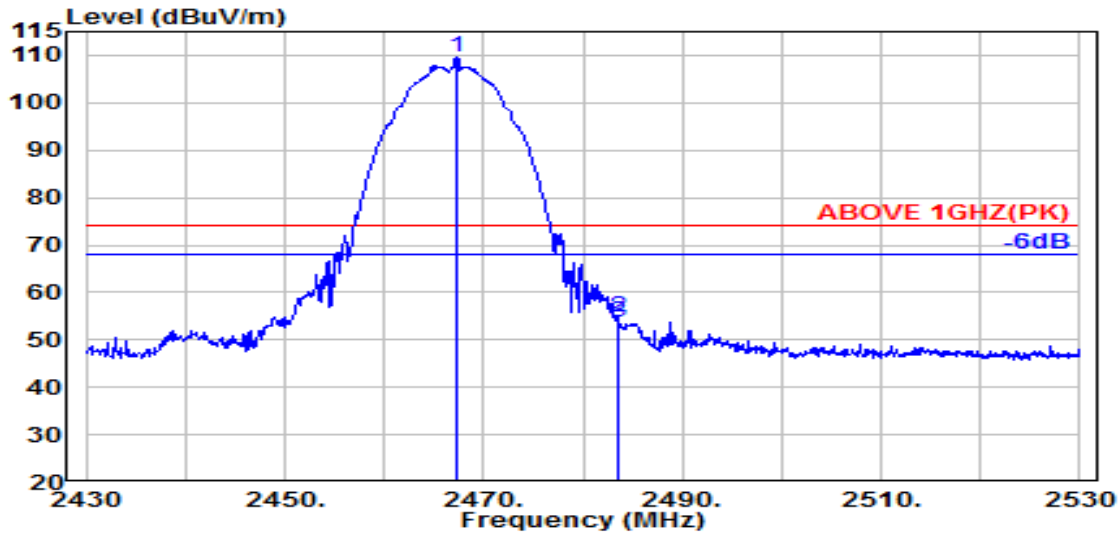

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.400	32.21	5.84	34.52	105.93	109.46	---	---	Peak
2483.500	32.40	5.87	34.53	50.92	54.66	74.00	19.34	Peak
2483.600	32.40	5.87	34.53	49.92	53.66	74.00	20.34	Peak

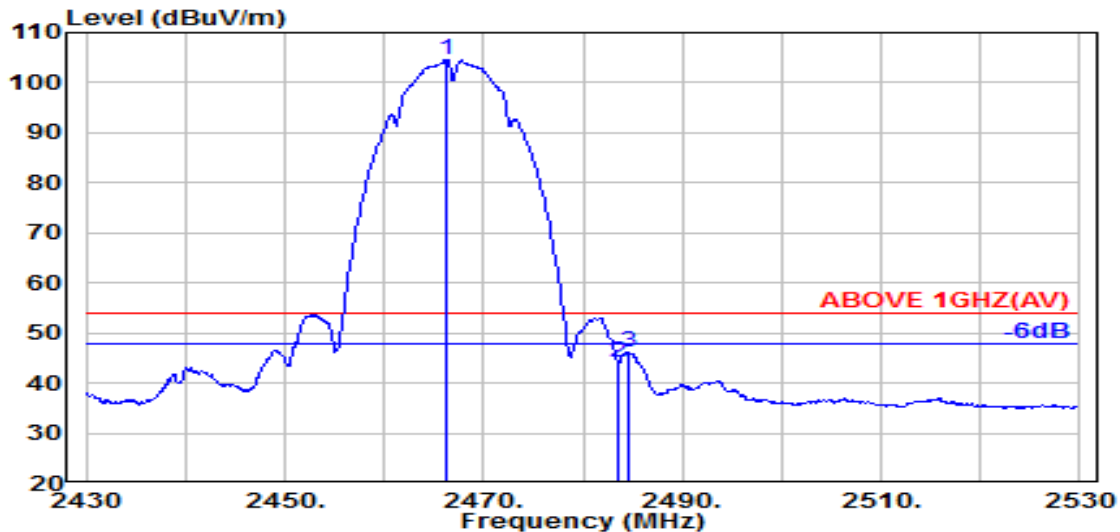


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.200	32.20	5.84	34.52	100.99	104.50	---	---	Average
2483.500	32.40	5.87	34.53	40.21	43.95	54.00	10.05	Average
2484.500	32.42	5.87	34.53	42.54	46.30	54.00	7.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

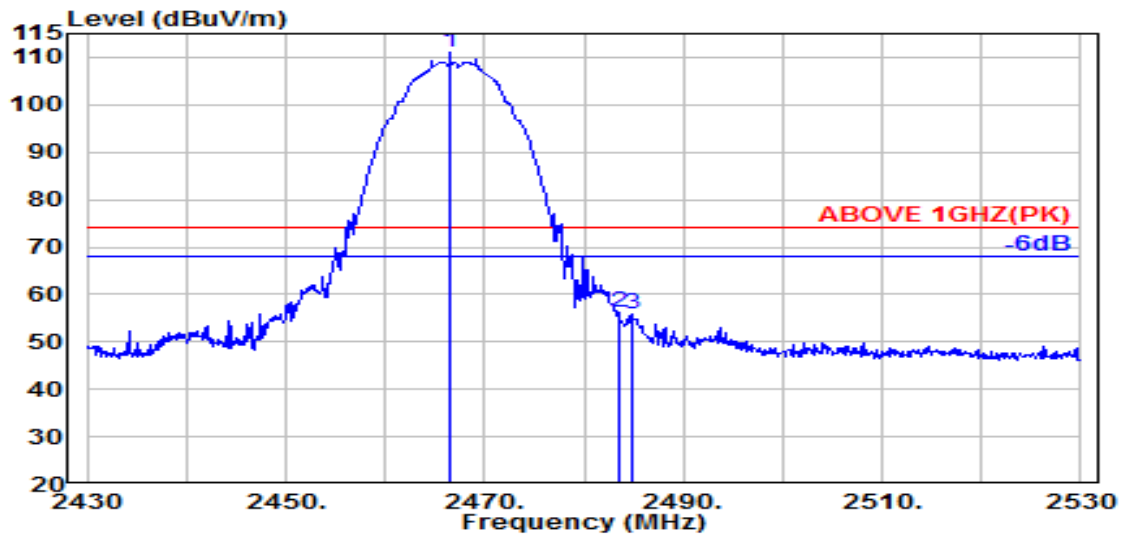

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	32.20	5.84	34.52	107.39	110.91	---	---	Peak
2483.500	32.40	5.87	34.53	52.29	56.04	74.00	17.96	Peak
2484.800	32.42	5.87	34.53	52.06	55.82	74.00	18.18	Peak

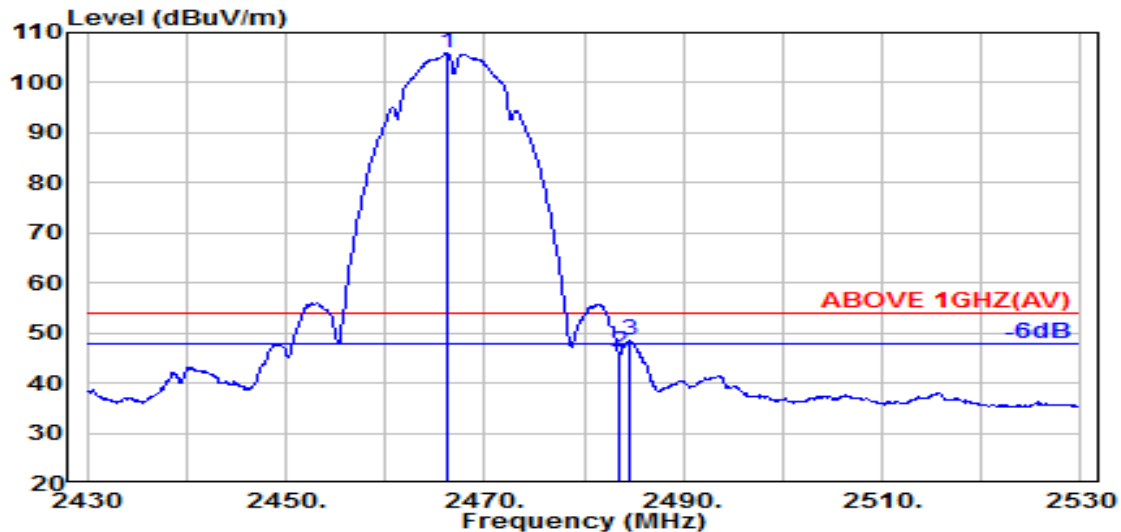


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.20	5.84	34.52	102.36	105.87	---	---	Average
2483.500	32.40	5.87	34.53	42.26	46.00	54.00	8.00	Average
2484.500	32.42	5.87	34.53	44.78	48.54	54.00	5.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

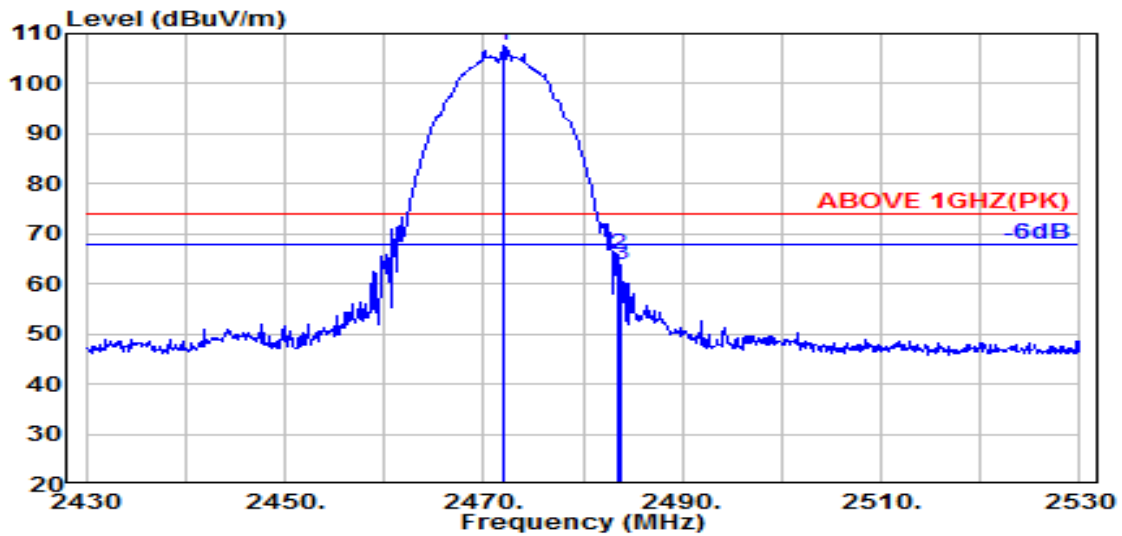

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.900	32.26	5.85	34.52	104.00	107.59	---	---	Peak
2483.500	32.40	5.87	34.53	62.17	65.91	74.00	8.09	Peak
2483.700	32.41	5.87	34.53	60.04	63.79	74.00	10.21	Peak

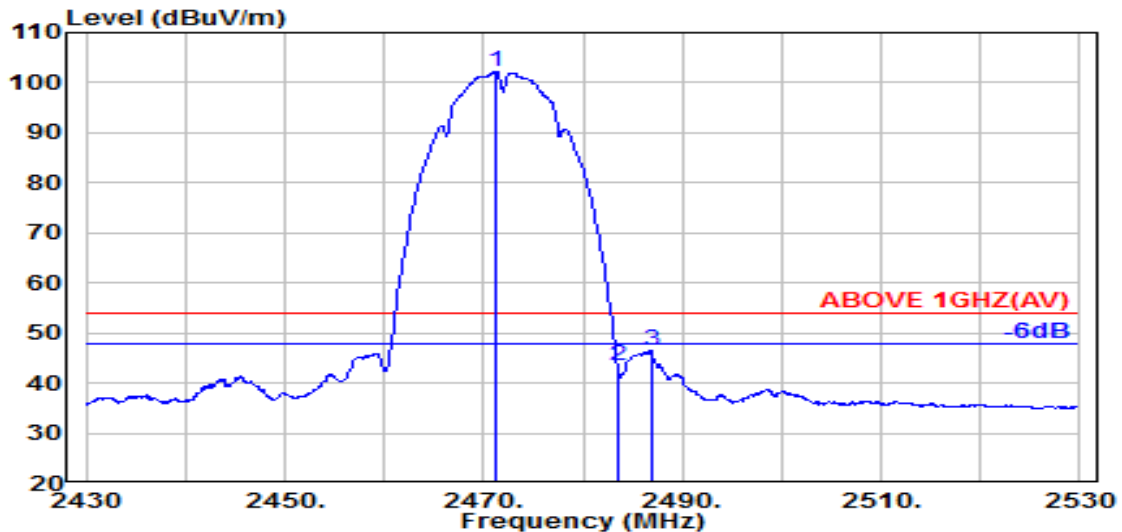


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	32.26	5.85	34.52	98.77	102.35	---	---	Average
2483.500	32.40	5.87	34.53	39.61	43.35	54.00	10.65	Average
2486.900	32.44	5.87	34.53	42.72	46.50	54.00	7.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

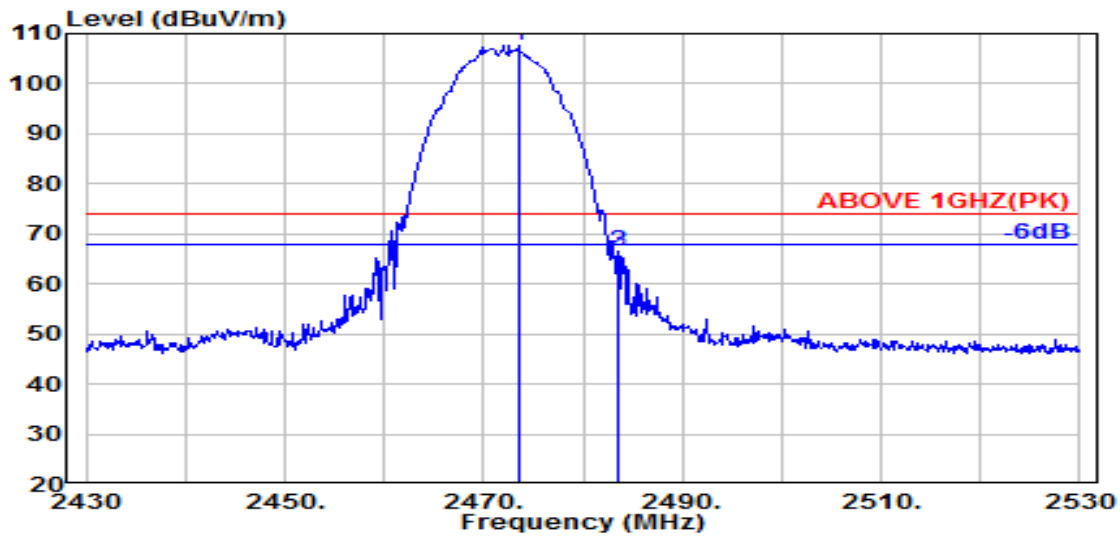

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.500	32.28	5.85	34.52	103.98	107.59	---	---	Peak
2483.500	32.40	5.87	34.53	62.65	66.40	74.00	7.60	Peak
2483.600	32.40	5.87	34.53	62.78	66.52	74.00	7.48	Peak

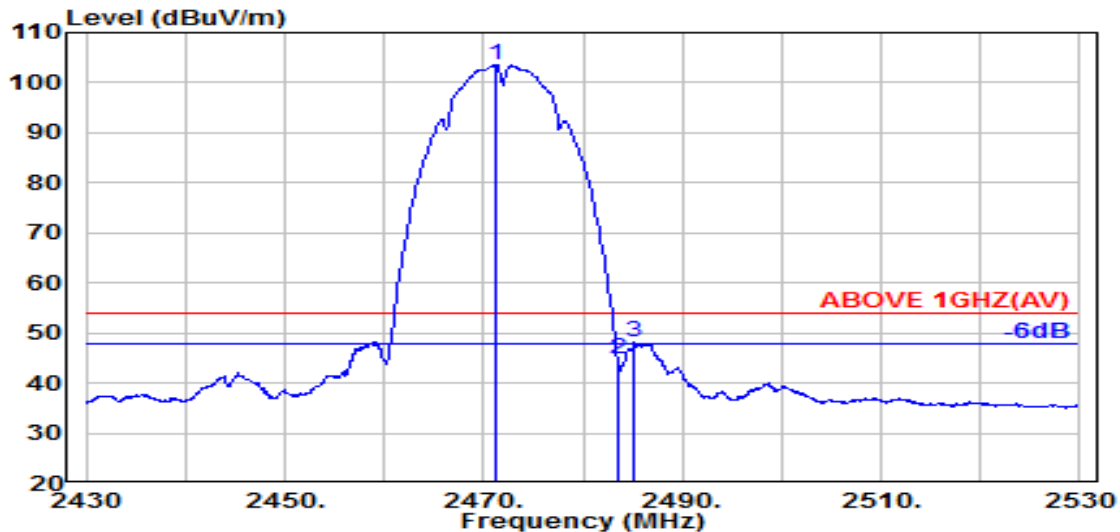


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	32.26	5.85	34.52	100.14	103.71	---	---	Average
2483.500	32.40	5.87	34.53	40.90	44.65	54.00	9.35	Average
2485.100	32.42	5.87	34.53	44.50	48.26	54.00	5.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

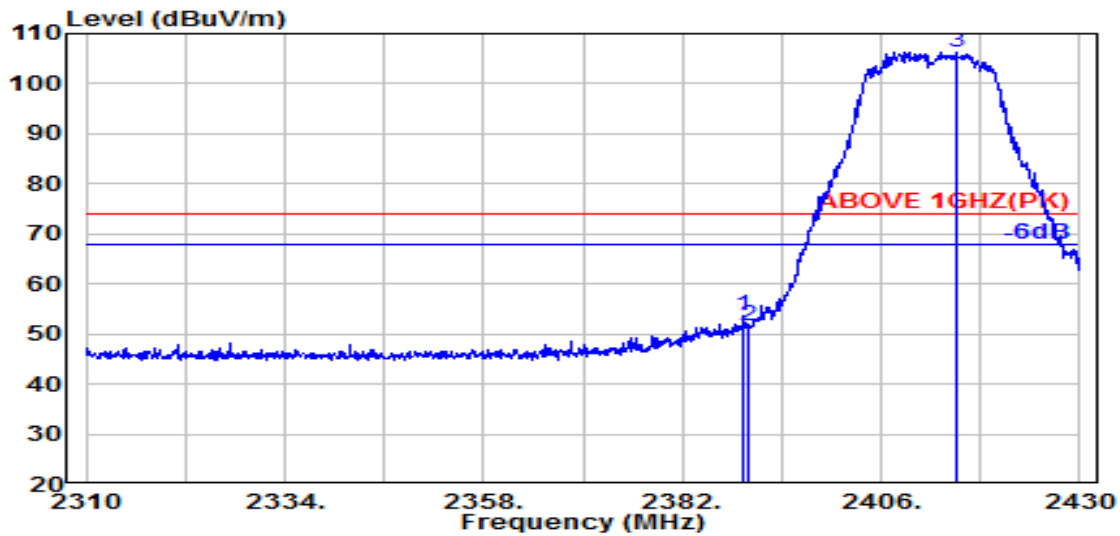

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	50.37	53.58	74.00	20.42	Peak
2390.000	32.00	5.72	34.51	48.21	51.42	74.00	22.58	Peak
@ 2415.000	32.00	5.76	34.51	103.15	106.40	---	---	Peak

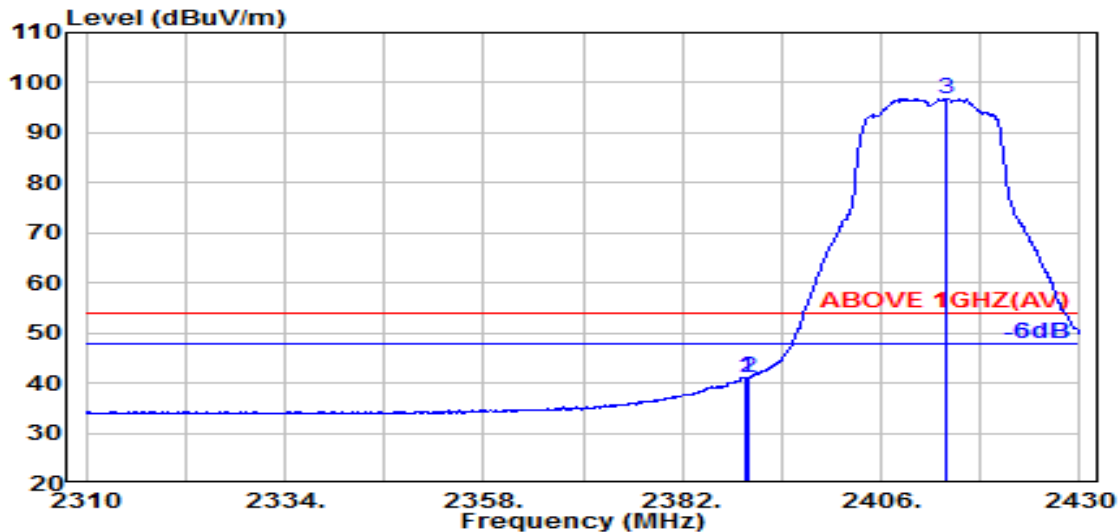


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	32.00	5.72	34.51	37.89	41.10	54.00	12.90	Average
2390.000	32.00	5.72	34.51	37.78	40.99	54.00	13.01	Average
@ 2414.000	32.00	5.76	34.51	93.62	96.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

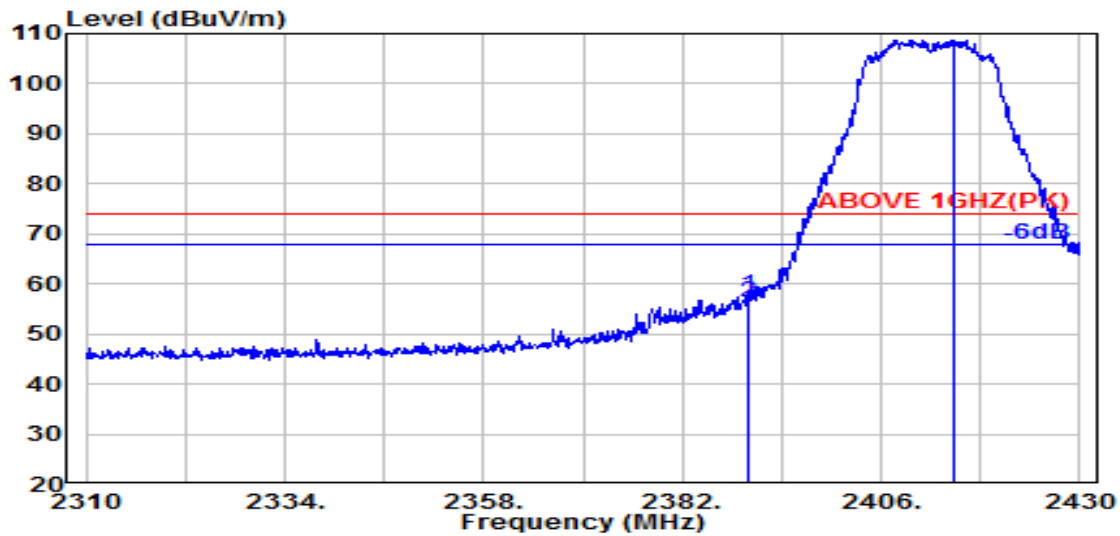

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	54.45	57.67	74.00	16.33	Peak
2390.000	32.00	5.72	34.51	53.17	56.38	74.00	17.62	Peak
@ 2414.900	32.00	5.76	34.51	105.48	108.73	---	---	Peak

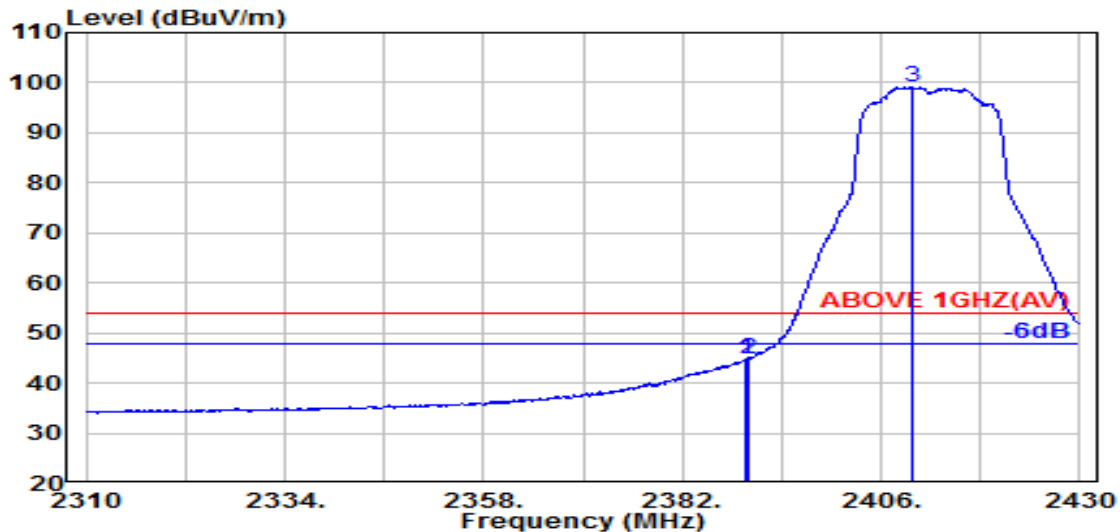


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.800	32.00	5.72	34.51	41.73	44.94	54.00	9.06	Average
2390.000	32.00	5.72	34.51	41.67	44.88	54.00	9.12	Average
@ 2409.700	32.00	5.75	34.51	95.82	99.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

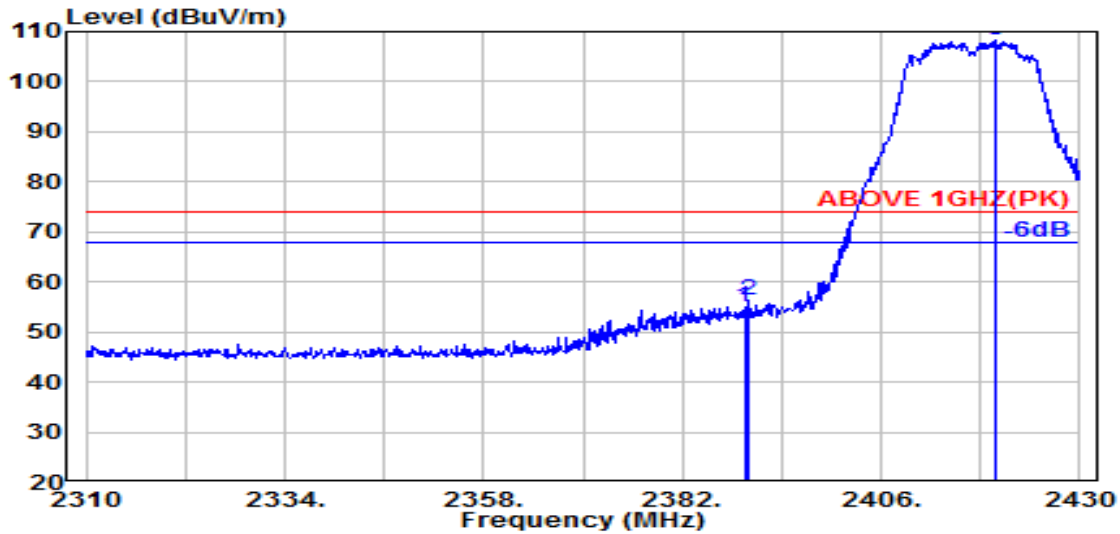

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	51.84	55.06	74.00	18.94	Peak
2390.000	32.00	5.72	34.51	53.22	56.44	74.00	17.56	Peak
@ 2419.800	32.00	5.77	34.51	104.93	108.19	---	---	Peak

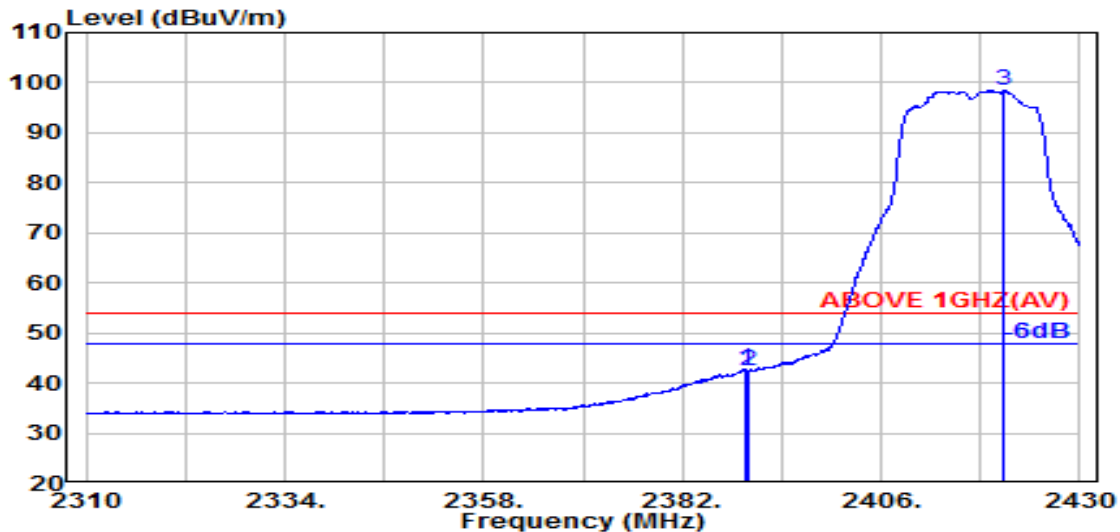


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	32.00	5.72	34.51	39.47	42.68	54.00	11.32	Average
2390.000	32.00	5.72	34.51	39.16	42.38	54.00	11.62	Average
@ 2420.900	32.00	5.77	34.51	95.28	98.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

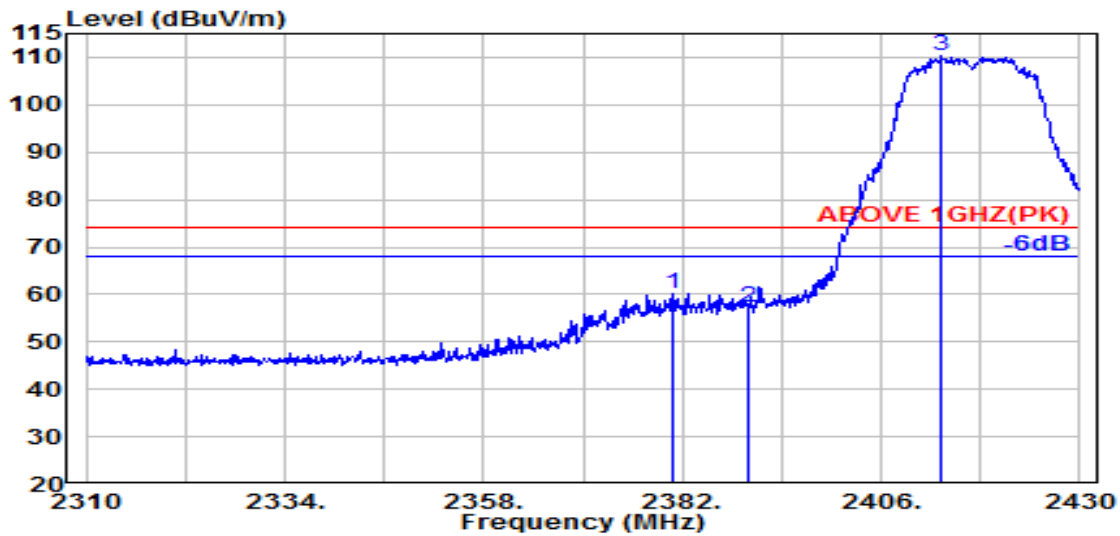

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.900	32.00	5.71	34.51	56.93	60.14	74.00	13.86	Peak
2390.000	32.00	5.72	34.51	54.10	57.31	74.00	16.69	Peak
@ 2413.200	32.00	5.76	34.51	106.93	110.18	---	---	Peak


Antenna at Vertical Polarization

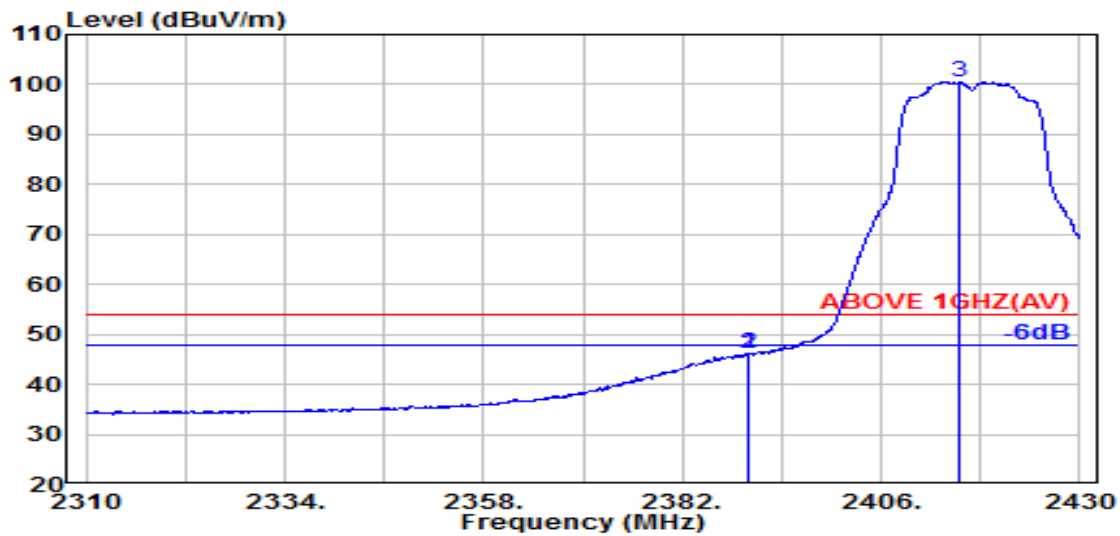

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	42.89	46.11	54.00	7.89	Average
2390.000	32.00	5.72	34.51	42.87	46.09	54.00	7.91	Average
@ 2415.500	32.00	5.76	34.51	97.33	100.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

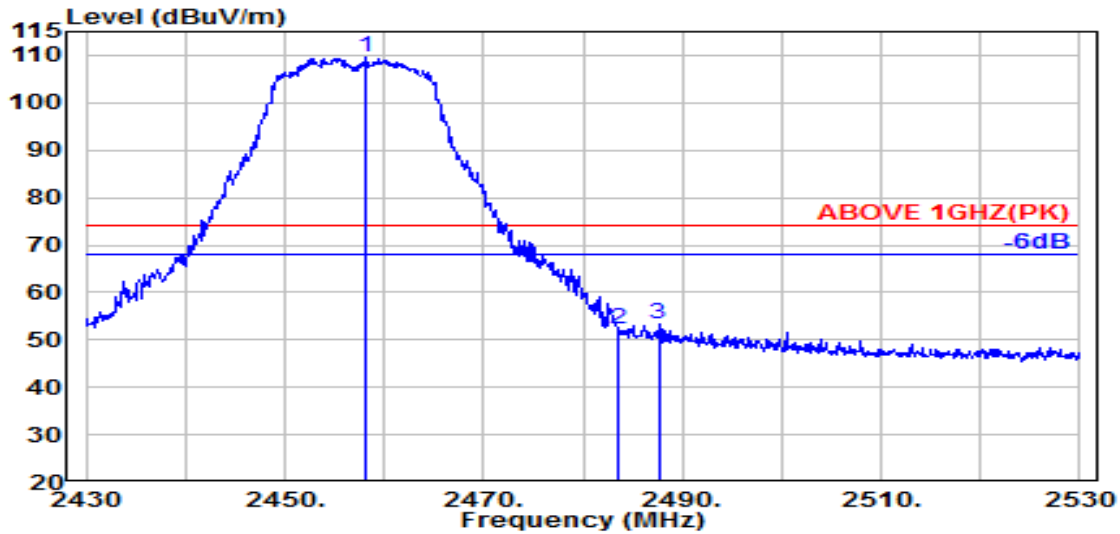

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	32.10	5.83	34.52	106.20	109.60	---	---	Peak
2483.500	32.40	5.87	34.53	48.37	52.11	74.00	21.89	Peak
2487.600	32.45	5.87	34.53	49.37	53.17	74.00	20.83	Peak

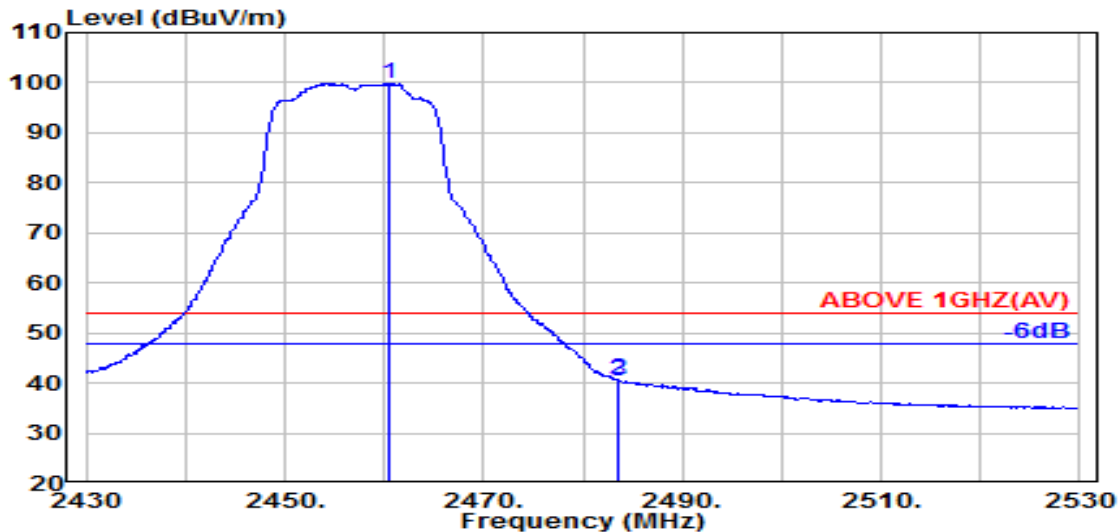


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	32.13	5.83	34.52	96.42	99.86	---	---	Average
2483.500	32.40	5.87	34.53	36.83	40.58	54.00	13.42	Average
2483.600	32.40	5.87	34.53	36.75	40.49	54.00	13.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

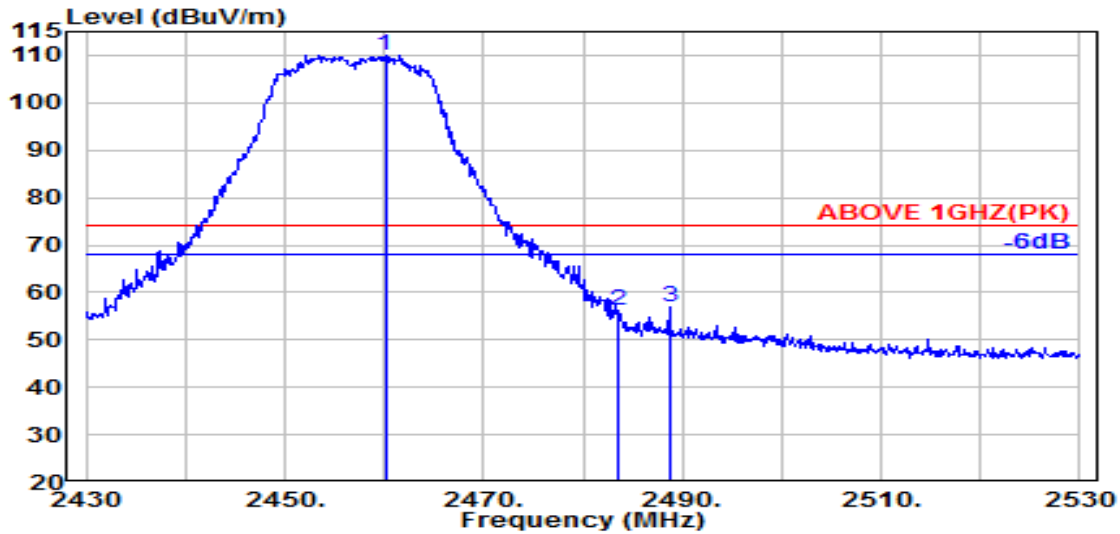

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	32.12	5.83	34.52	106.60	110.03	---	---	Peak
2483.500	32.40	5.87	34.53	52.55	56.30	74.00	17.70	Peak
2488.700	32.47	5.87	34.53	52.99	56.81	74.00	17.19	Peak

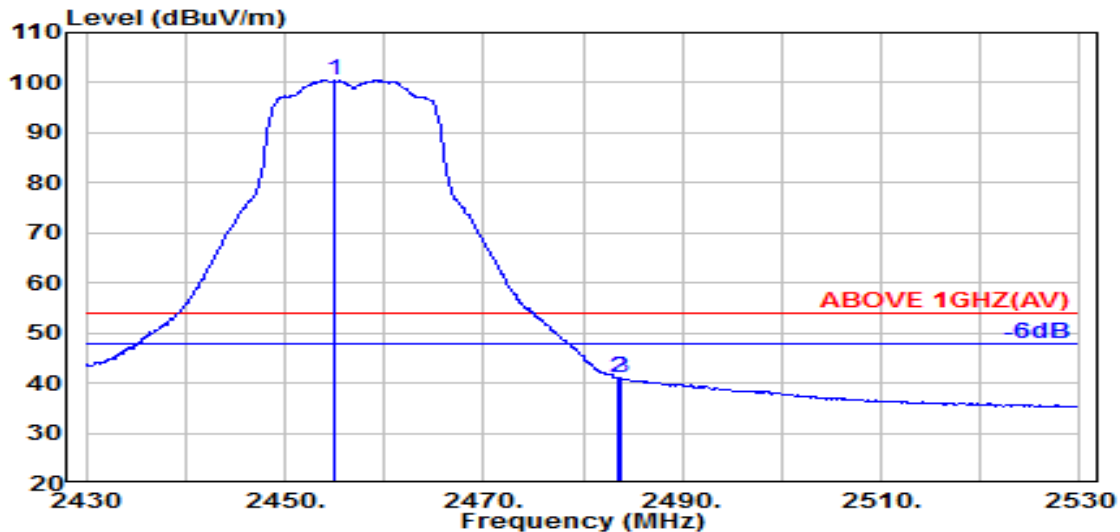


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.06	5.82	34.52	97.28	100.64	---	---	Average
2483.500	32.40	5.87	34.53	37.32	41.06	54.00	12.94	Average
2483.900	32.41	5.87	34.53	37.20	40.95	54.00	13.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

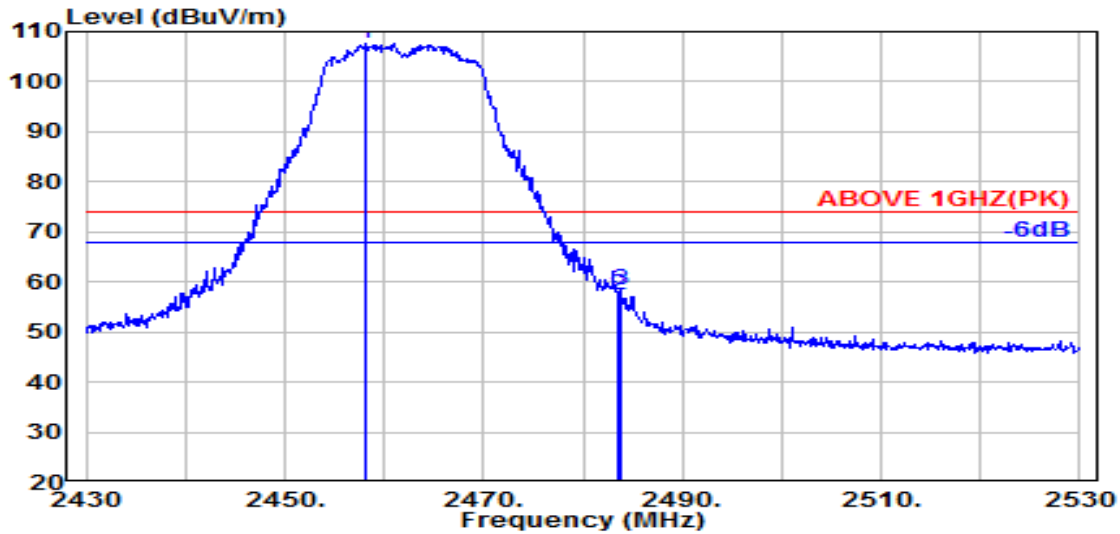

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.200	32.10	5.83	34.52	104.31	107.72	---	---	Peak
2483.500	32.40	5.87	34.53	53.67	57.41	74.00	16.59	Peak
2483.700	32.41	5.87	34.53	54.79	58.54	74.00	15.46	Peak

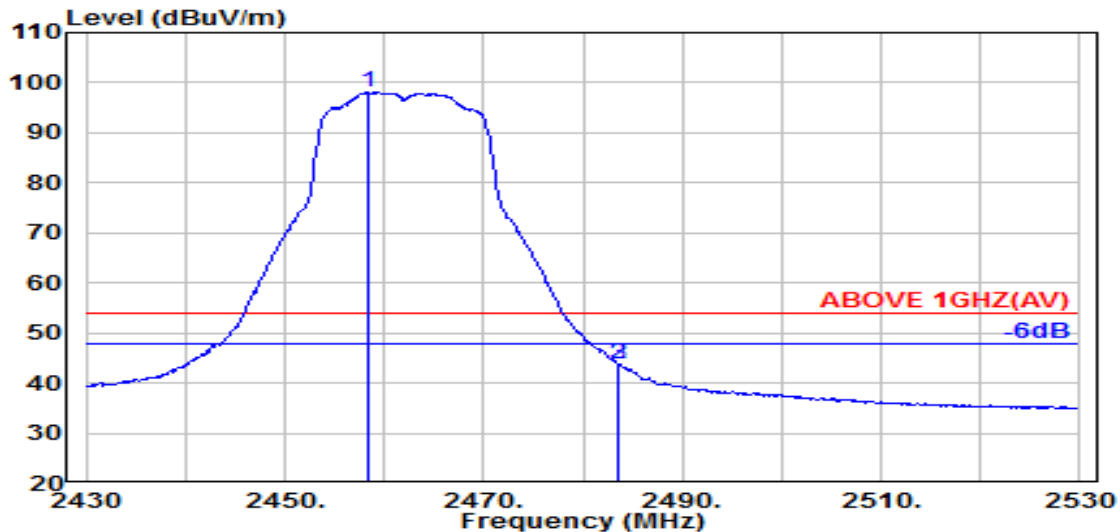


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	32.10	5.83	34.52	94.79	98.20	---	---	Average
2483.500	32.40	5.87	34.53	40.16	43.90	54.00	10.10	Average
2483.600	32.40	5.87	34.53	40.20	43.94	54.00	10.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

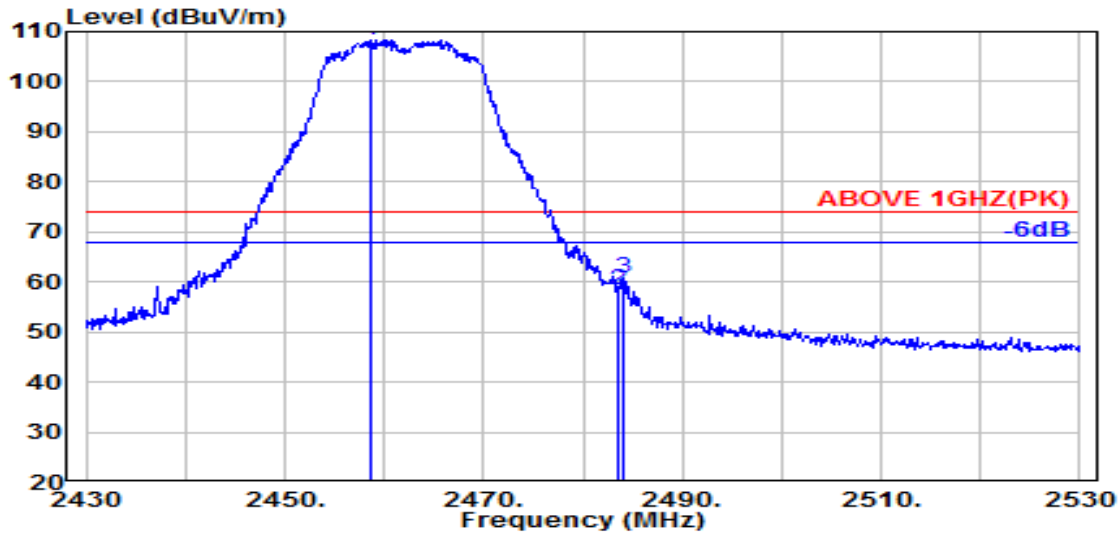

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	32.11	5.83	34.52	104.95	108.36	---	---	Peak
2483.500	32.40	5.87	34.53	54.78	58.52	74.00	15.48	Peak
2484.000	32.41	5.87	34.53	57.13	60.88	74.00	13.12	Peak

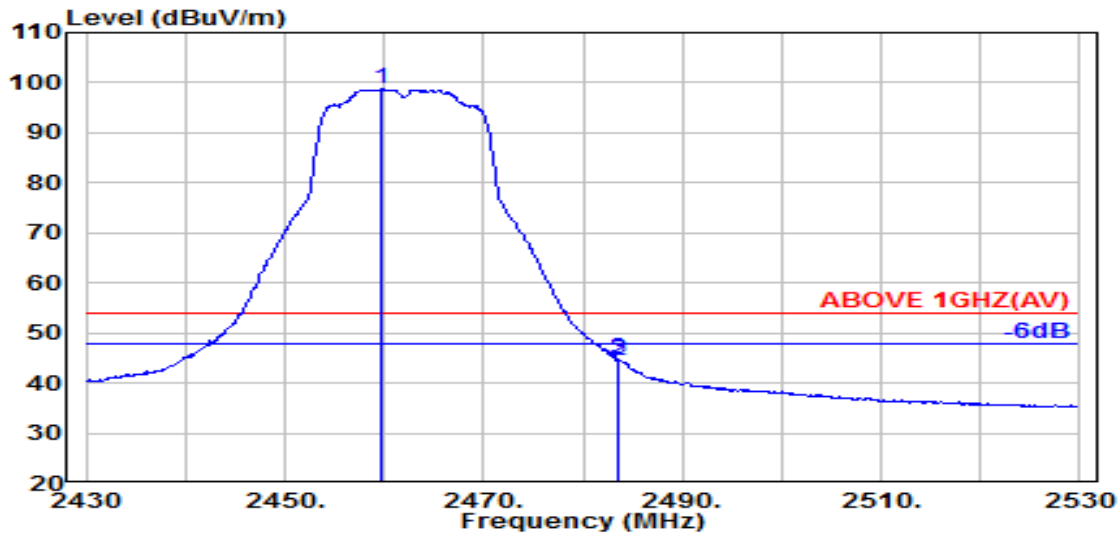


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	32.12	5.83	34.52	95.32	98.75	---	---	Average
2483.500	32.40	5.87	34.53	40.86	44.60	54.00	9.40	Average
2483.600	32.40	5.87	34.53	40.89	44.63	54.00	9.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

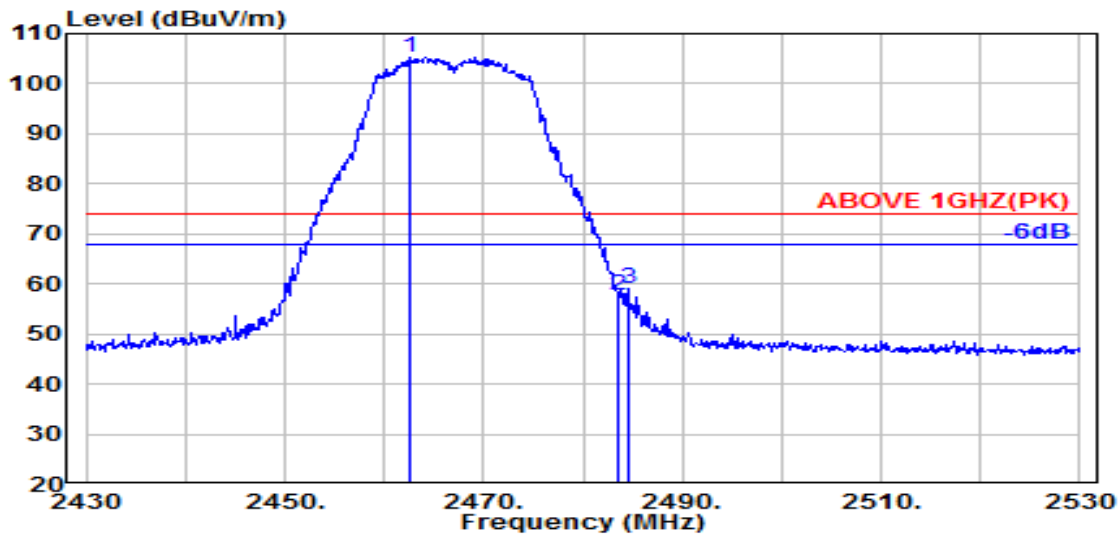

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.700	32.15	5.83	34.52	101.85	105.32	---	---	Peak
2483.500	32.40	5.87	34.53	53.88	57.62	74.00	16.38	Peak
2484.600	32.42	5.87	34.53	55.43	59.19	74.00	14.81	Peak

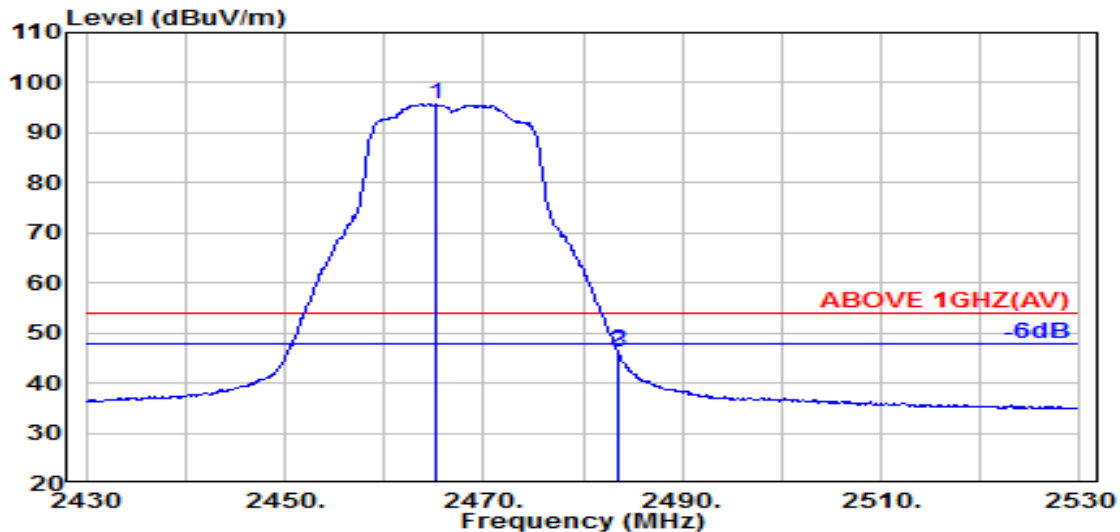


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	32.18	5.84	34.52	92.36	95.86	---	---	Average
2483.500	32.40	5.87	34.53	42.70	46.44	54.00	7.56	Average
2483.600	32.40	5.87	34.53	42.32	46.06	54.00	7.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

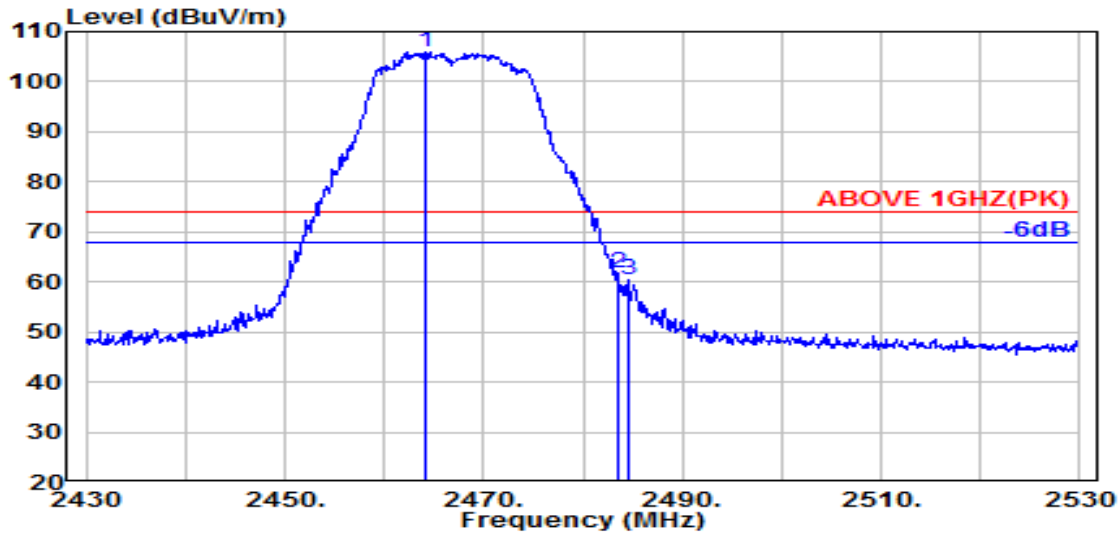

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	32.17	5.84	34.52	102.46	105.95	---	---	Peak
2483.500	32.40	5.87	34.53	57.92	61.66	74.00	12.34	Peak
2484.500	32.42	5.87	34.53	56.64	60.39	74.00	13.61	Peak

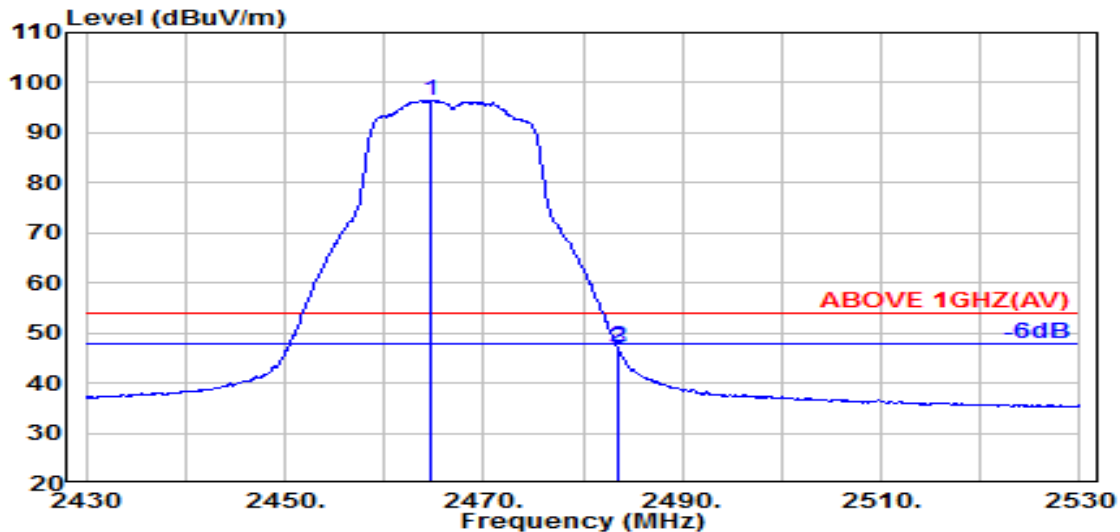


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	32.18	5.84	34.52	92.98	96.47	---	---	Average
2483.500	32.40	5.87	34.53	43.39	47.13	54.00	6.87	Average
2483.600	32.40	5.87	34.53	42.96	46.71	54.00	7.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

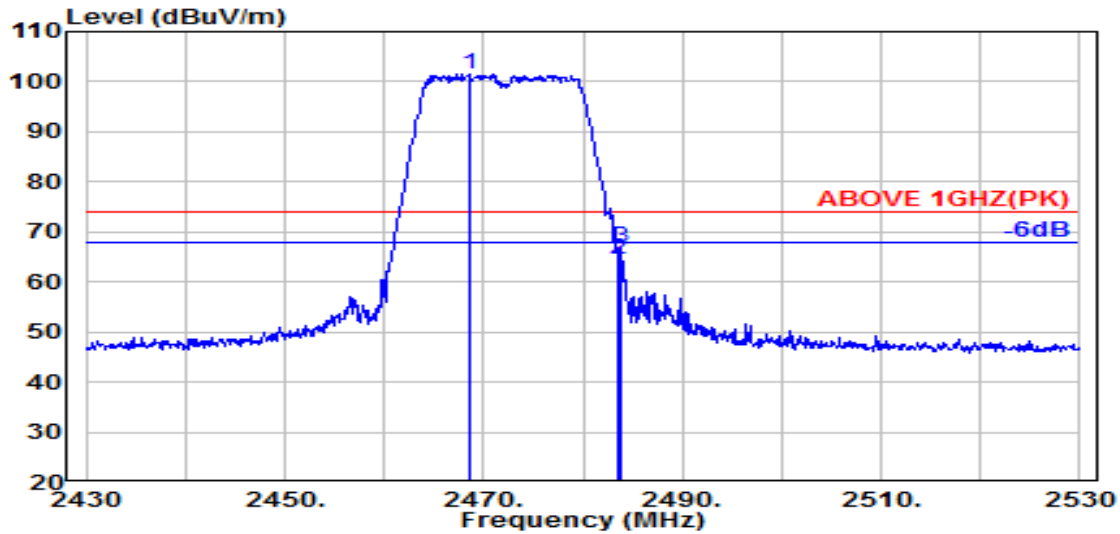

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.22	5.84	34.52	97.97	101.51	---	---	Peak
2483.500	32.40	5.87	34.53	60.69	64.43	74.00	9.57	Peak
2483.700	32.41	5.87	34.53	63.02	66.76	74.00	7.24	Peak

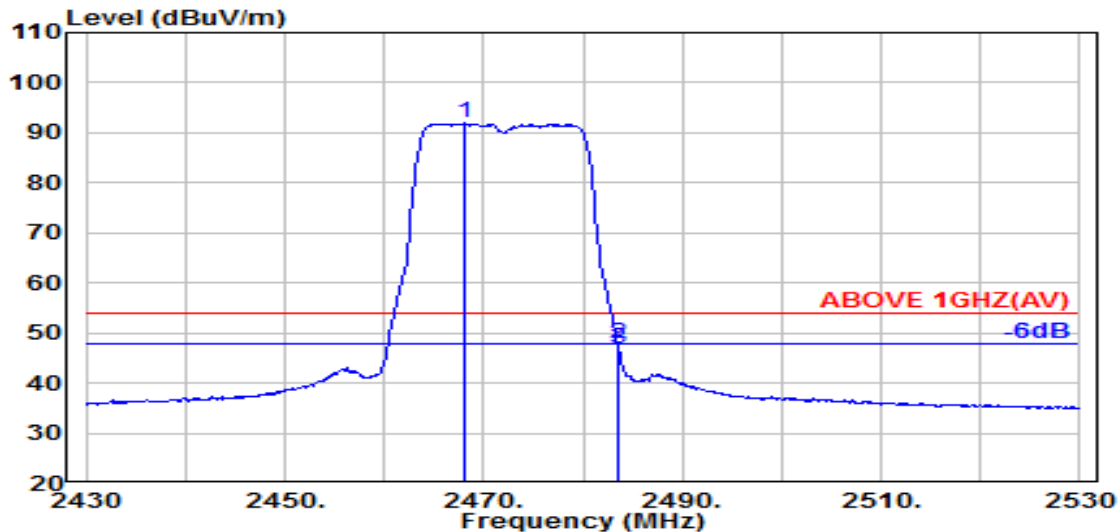


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	32.22	5.84	34.52	88.36	91.90	---	---	Average
2483.500	32.40	5.87	34.53	44.08	47.83	54.00	6.17	Average
2483.600	32.40	5.87	34.53	43.16	46.90	54.00	7.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

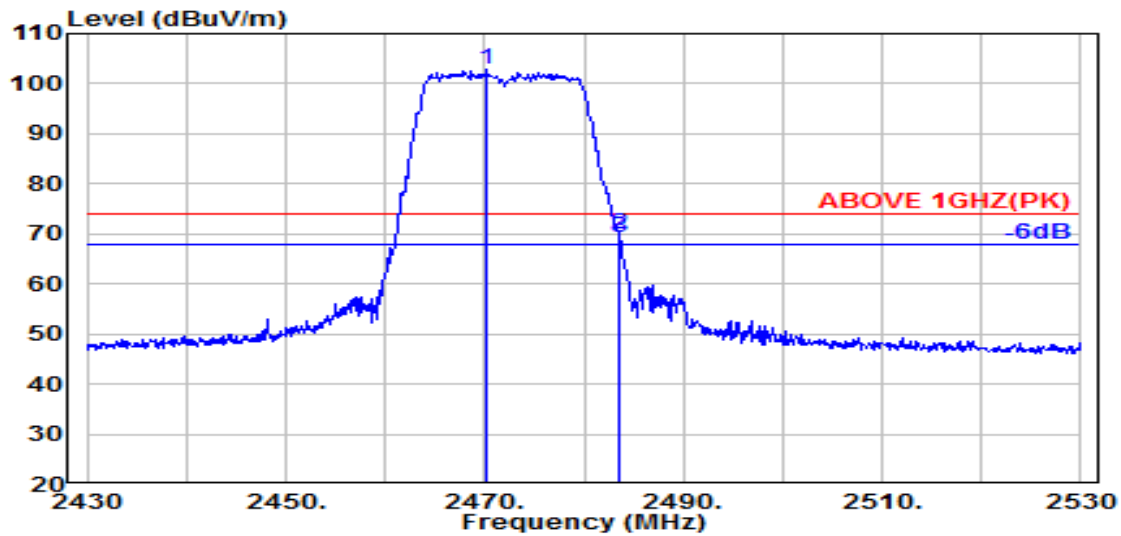

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.300	32.25	5.85	34.52	99.25	102.82	---	---	Peak
2483.500	32.40	5.87	34.53	66.14	69.88	74.00	4.12	Peak
2483.600	32.40	5.87	34.53	65.53	69.27	74.00	4.73	Peak

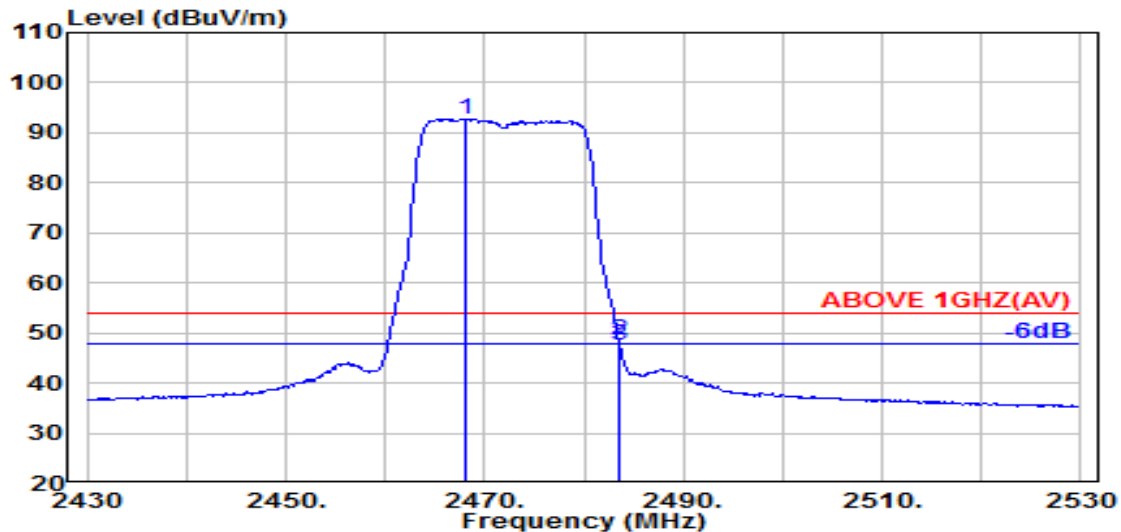


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	32.22	5.84	34.52	89.31	92.85	---	---	Average
2483.500	32.40	5.87	34.53	44.72	48.46	54.00	5.54	Average
2483.600	32.40	5.87	34.53	43.87	47.62	54.00	6.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

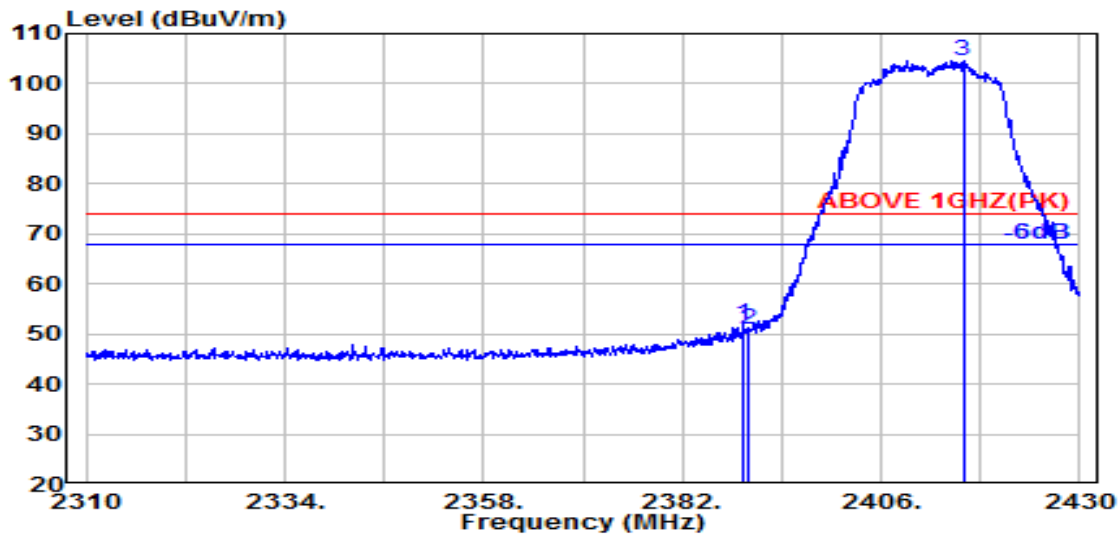

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	32.00	5.72	34.51	48.77	51.98	74.00	22.02	Peak
2390.000	32.00	5.72	34.51	47.57	50.79	74.00	23.21	Peak
@ 2415.900	32.00	5.76	34.51	101.45	104.70	---	---	Peak

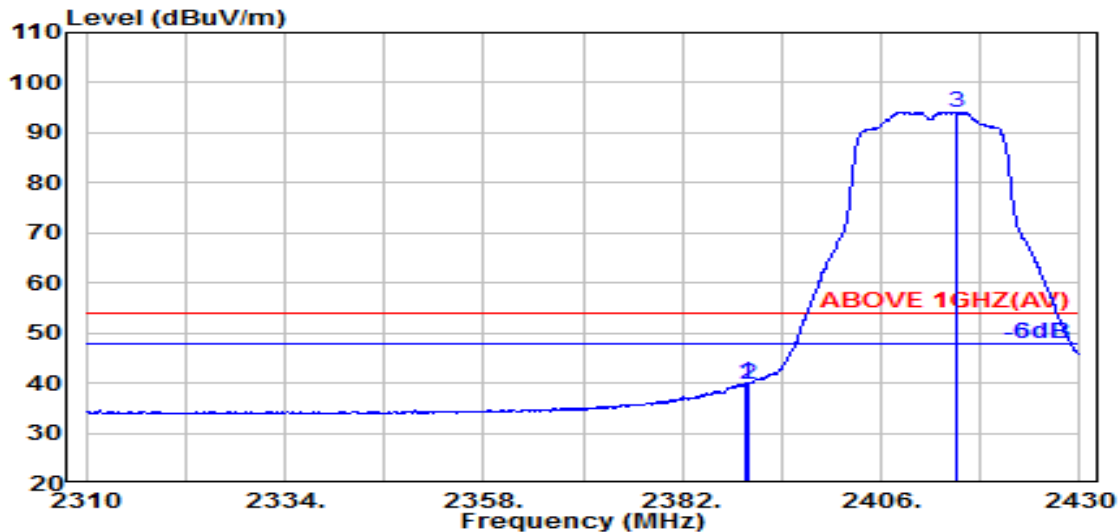


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	32.00	5.72	34.51	36.90	40.11	54.00	13.89	Average
2390.000	32.00	5.72	34.51	36.55	39.76	54.00	14.24	Average
@ 2415.000	32.00	5.76	34.51	90.90	94.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

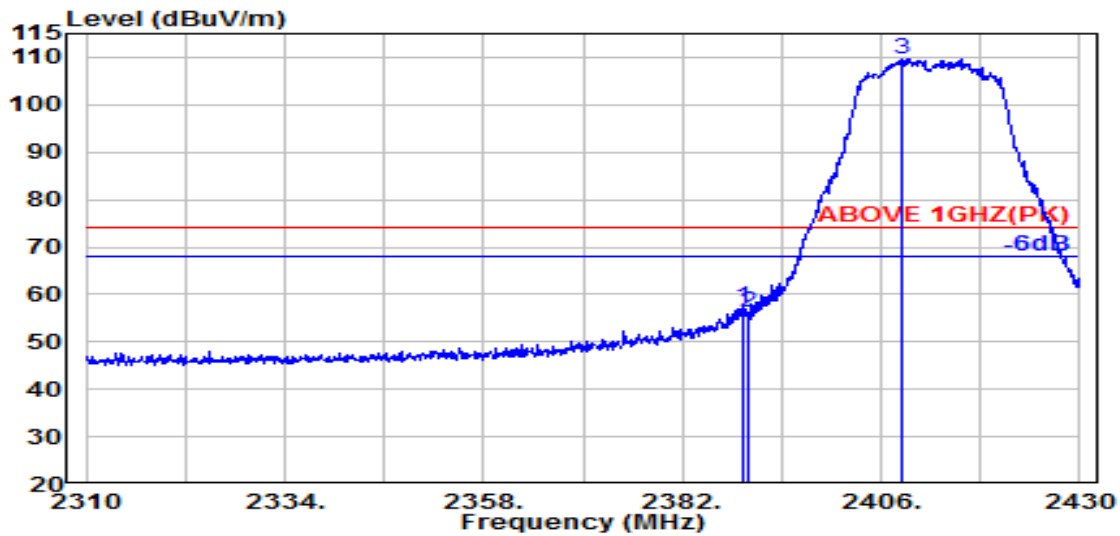

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	32.00	5.72	34.51	54.14	57.35	74.00	16.65	Peak
2390.000	32.00	5.72	34.51	53.12	56.34	74.00	17.66	Peak
@ 2408.400	32.00	5.75	34.51	106.49	109.73	---	---	Peak

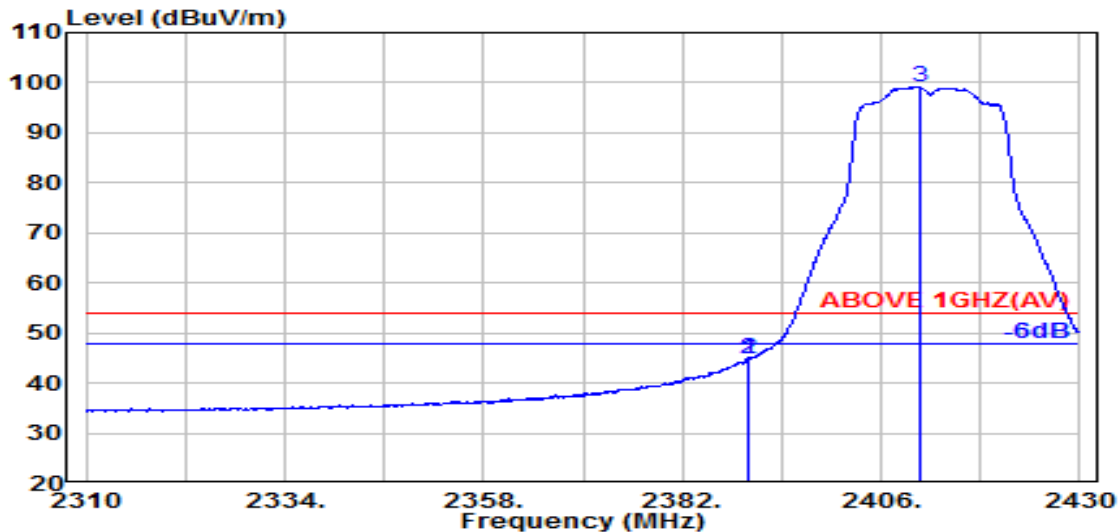


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	41.50	44.72	54.00	9.28	Average
2390.000	32.00	5.72	34.51	41.54	44.75	54.00	9.25	Average
@ 2410.600	32.00	5.75	34.51	96.00	99.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

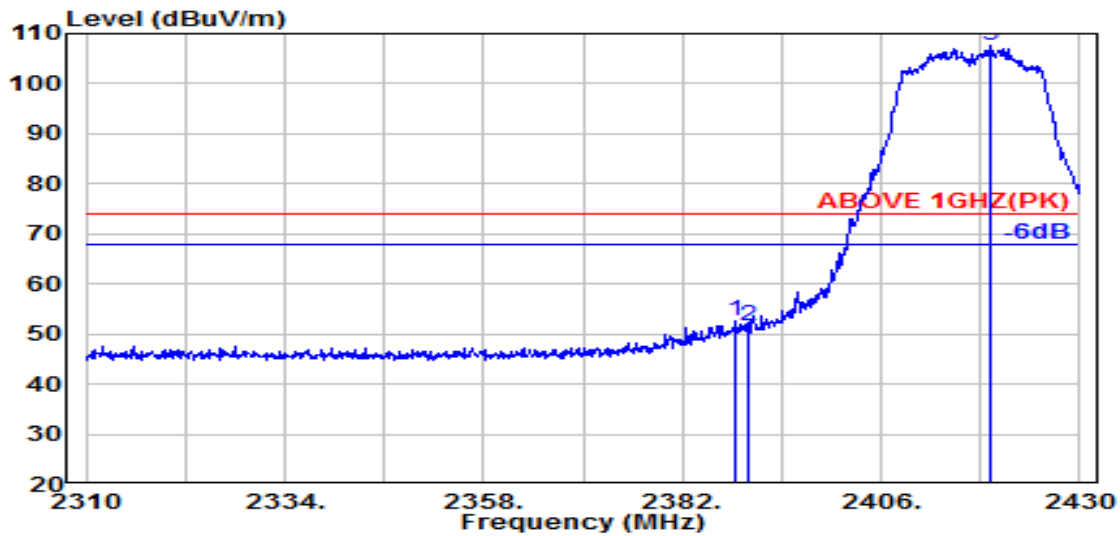

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	32.00	5.72	34.51	49.39	52.60	74.00	21.40	Peak
2390.000	32.00	5.72	34.51	48.35	51.57	74.00	22.43	Peak
@ 2419.100	32.00	5.77	34.51	104.32	107.58	---	---	Peak

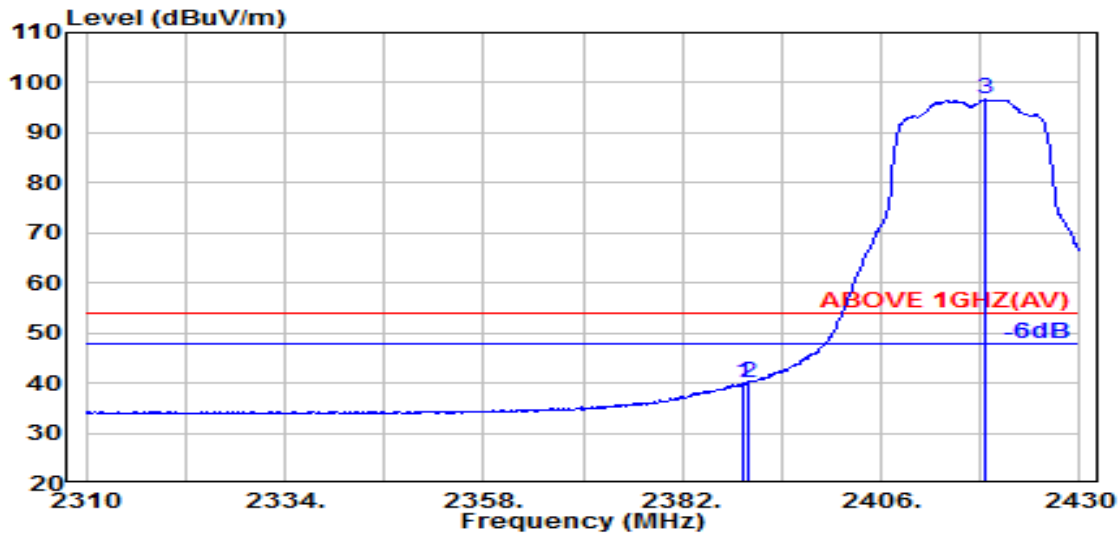


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	36.72	39.94	54.00	14.06	Average
2390.000	32.00	5.72	34.51	36.77	39.98	54.00	14.02	Average
@ 2418.600	32.00	5.77	34.51	93.36	96.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

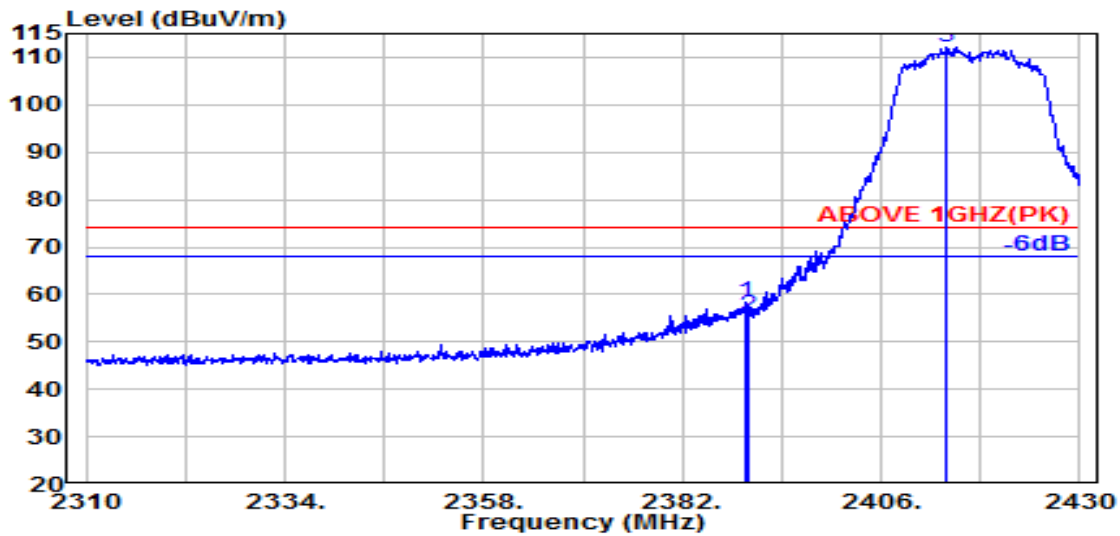

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.800	32.00	5.72	34.51	55.32	58.53	74.00	15.47	Peak
2390.000	32.00	5.72	34.51	52.42	55.64	74.00	18.36	Peak
@ 2413.900	32.00	5.76	34.51	108.80	112.05	---	---	Peak

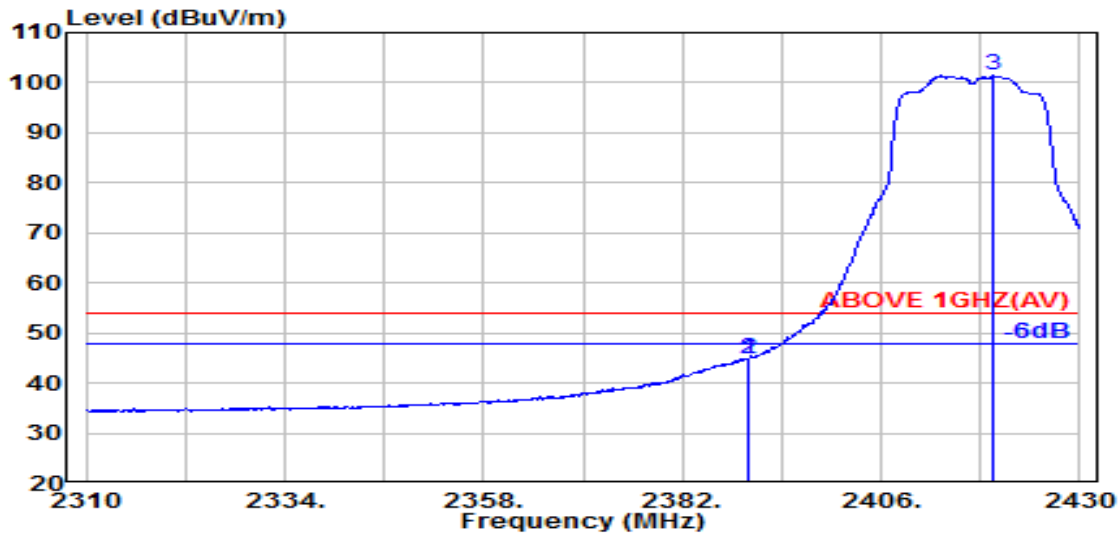


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	41.70	44.92	54.00	9.08	Average
2390.000	32.00	5.72	34.51	41.56	44.78	54.00	9.22	Average
@ 2419.600	32.00	5.77	34.51	98.10	101.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

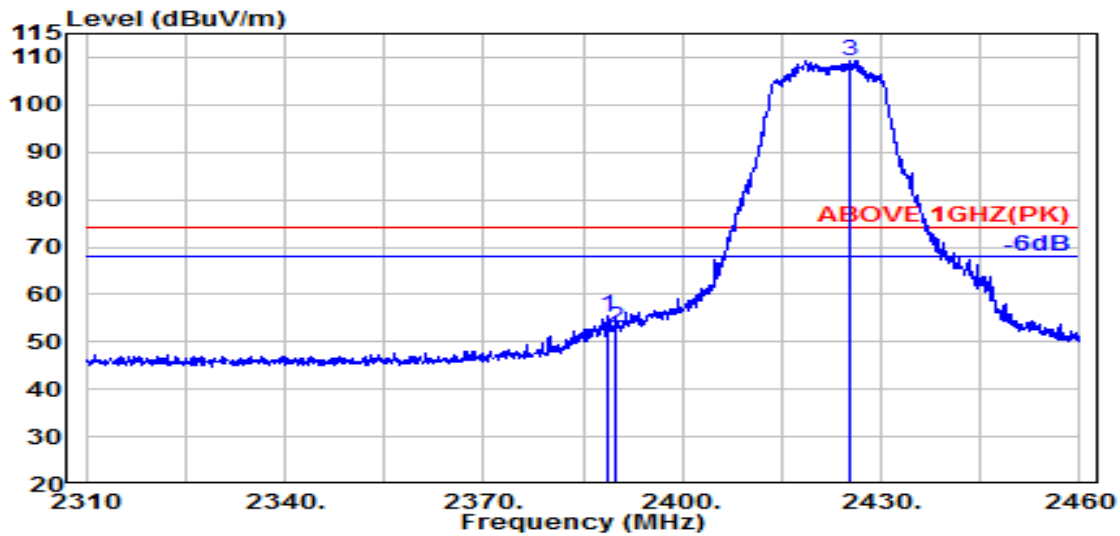

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	32.00	5.72	34.51	52.34	55.55	74.00	18.45	Peak
2390.000	32.00	5.72	34.51	49.71	52.92	74.00	21.08	Peak
@ 2425.300	32.00	5.78	34.52	106.08	109.34	---	---	Peak

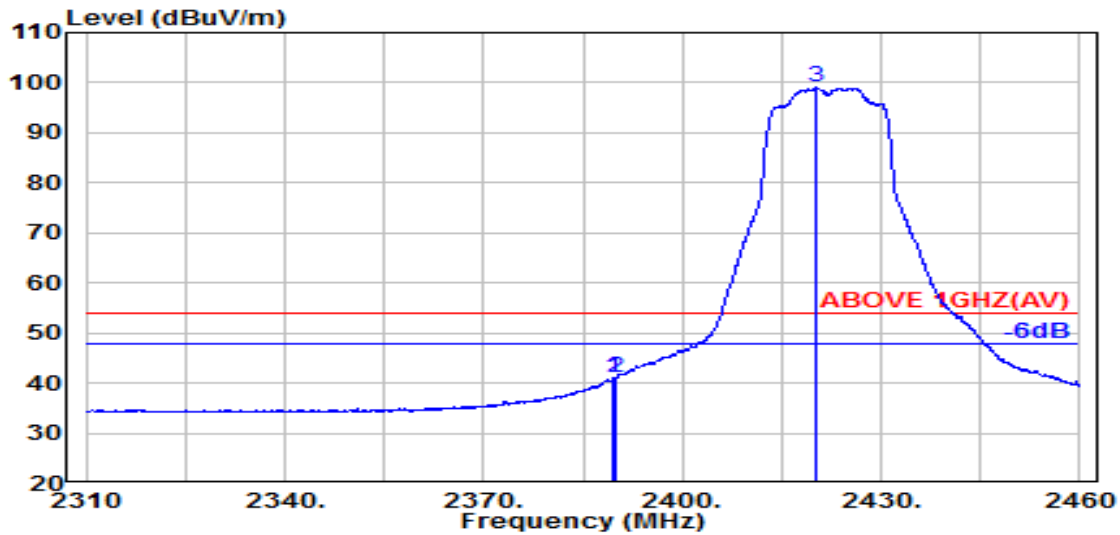


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	32.00	5.72	34.51	37.78	40.99	54.00	13.01	Average
2390.000	32.00	5.72	34.51	37.73	40.95	54.00	13.05	Average
@ 2420.300	32.00	5.77	34.51	95.80	99.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

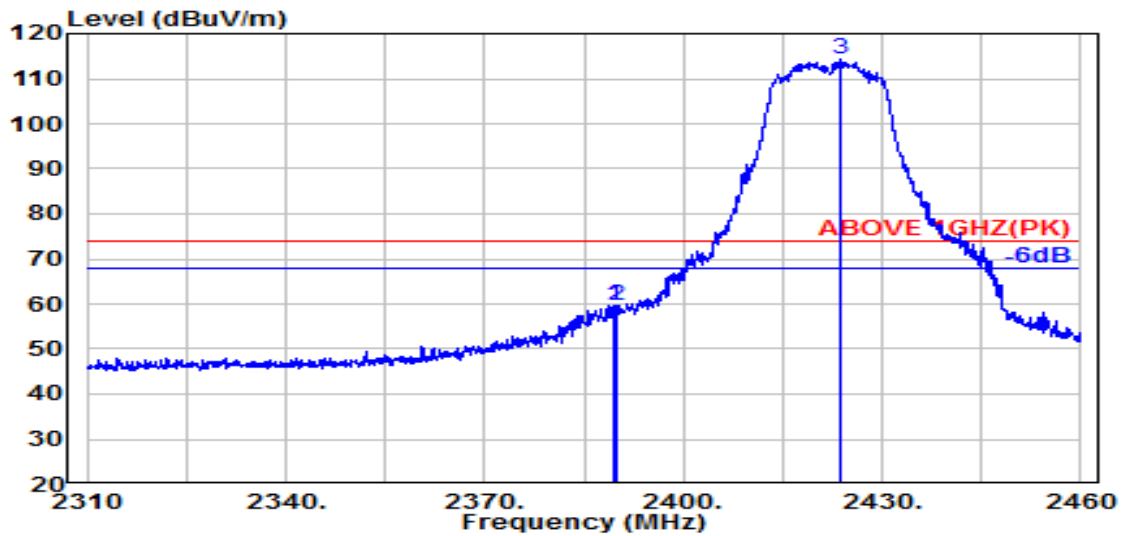

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	56.32	59.54	74.00	14.46	Peak
2390.000	32.00	5.72	34.51	56.37	59.58	74.00	14.42	Peak
@ 2423.900	32.00	5.78	34.51	110.94	114.20	---	---	Peak

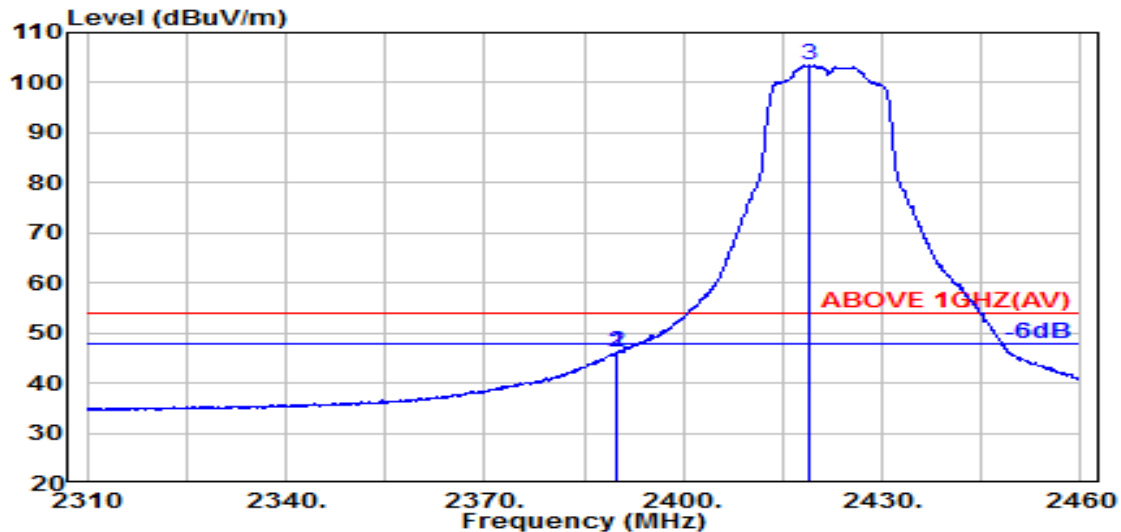


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	42.84	46.05	54.00	7.95	Average
2390.000	32.00	5.72	34.51	43.04	46.25	54.00	7.75	Average
@ 2419.100	32.00	5.77	34.51	100.32	103.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

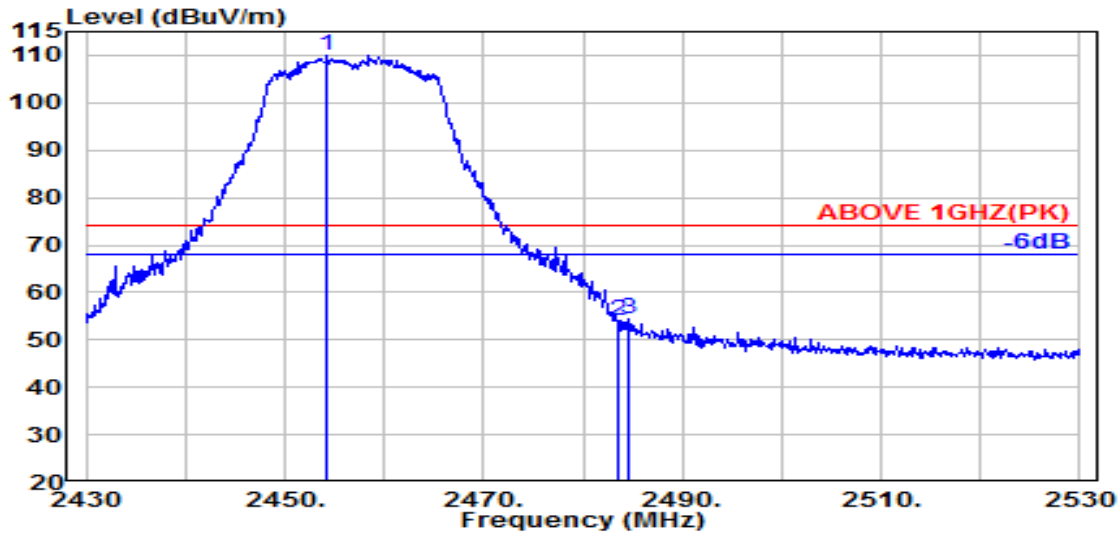

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.300	32.05	5.82	34.52	106.59	109.95	---	---	Peak
2483.500	32.40	5.87	34.53	50.36	54.10	74.00	19.90	Peak
2484.600	32.42	5.87	34.53	50.79	54.55	74.00	19.45	Peak

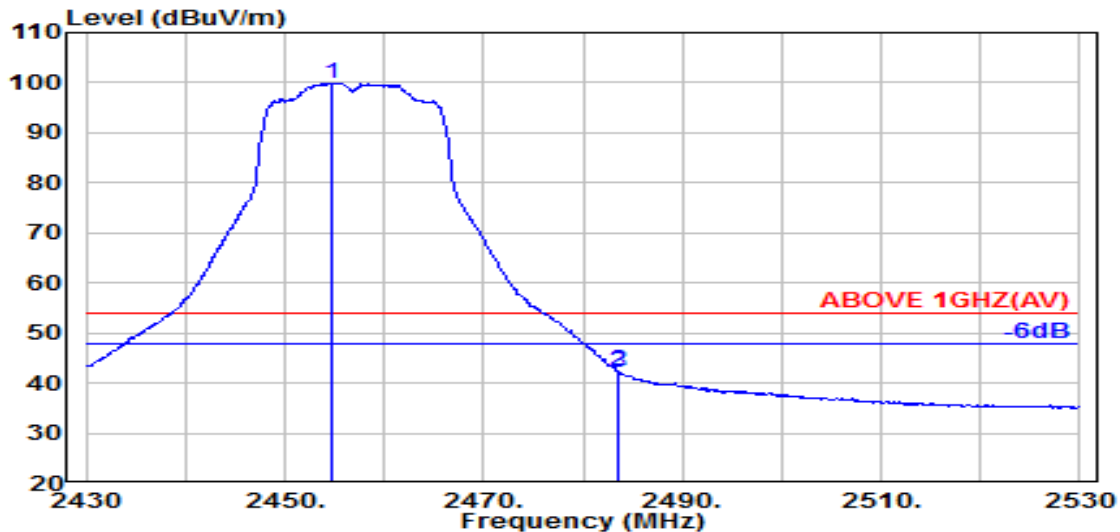


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.800	32.06	5.82	34.52	96.57	99.93	---	---	Average
2483.500	32.40	5.87	34.53	38.55	42.30	54.00	11.70	Average
2483.600	32.40	5.87	34.53	38.45	42.19	54.00	11.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

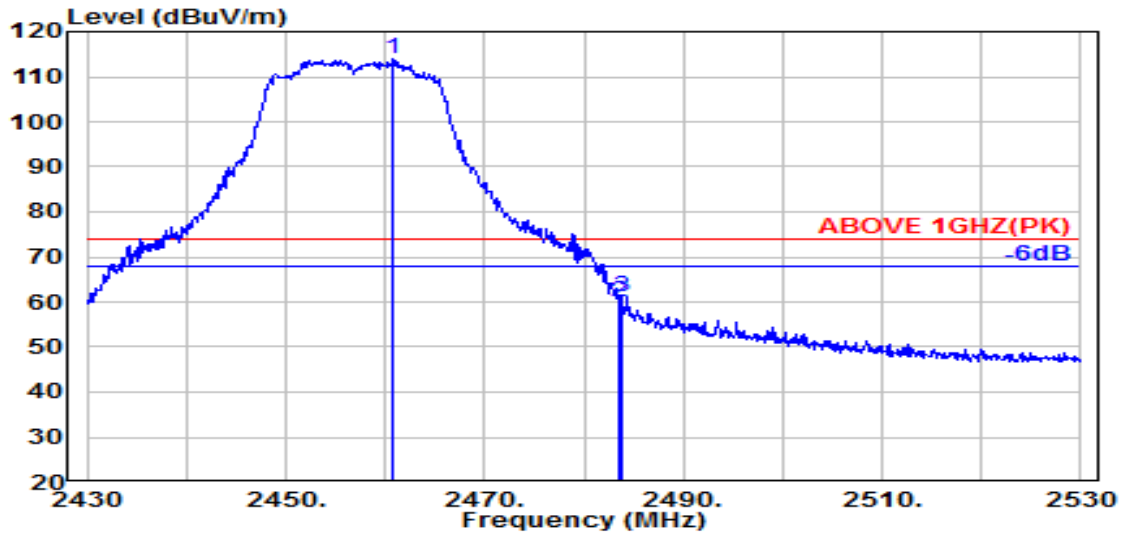

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.800	32.13	5.83	34.52	110.40	113.84	---	---	Peak
2483.500	32.40	5.87	34.53	56.13	59.87	74.00	14.13	Peak
2483.800	32.41	5.87	34.53	57.56	61.31	74.00	12.69	Peak

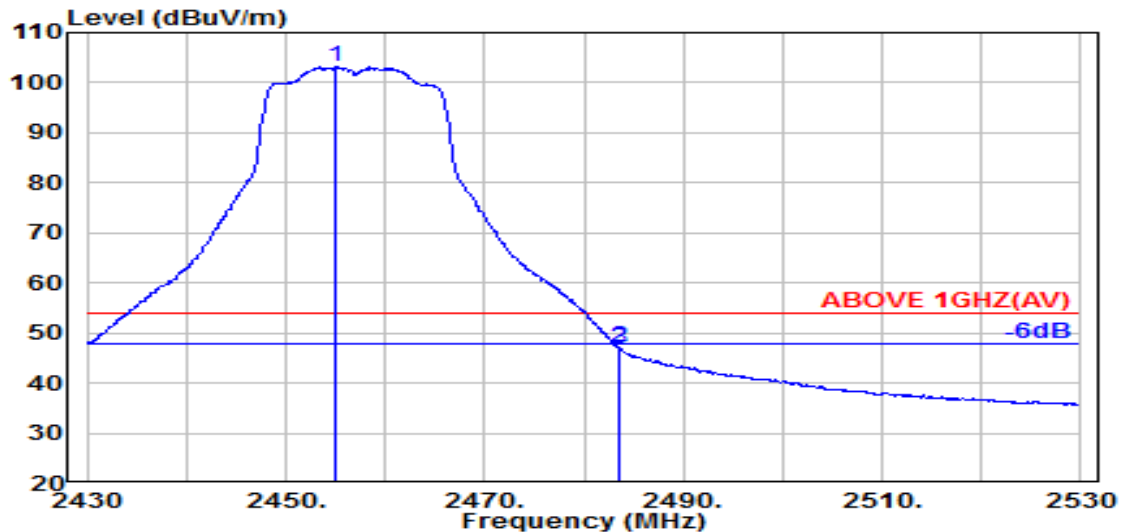


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.100	32.06	5.82	34.52	99.75	103.11	---	---	Average
2483.500	32.40	5.87	34.53	43.30	47.04	54.00	6.96	Average
2483.600	32.40	5.87	34.53	43.04	46.78	54.00	7.22	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

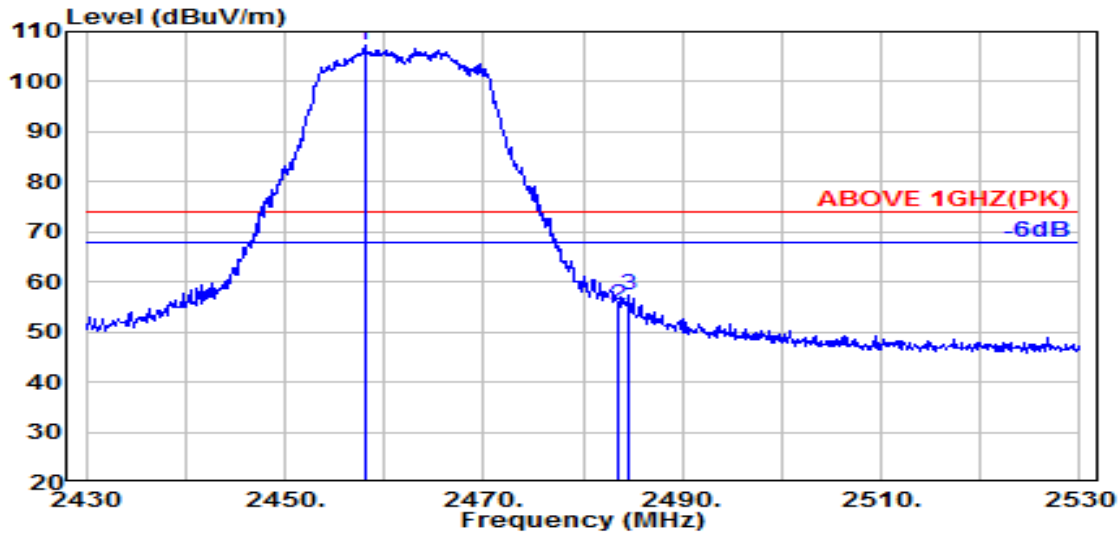

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	32.10	5.83	34.52	103.89	107.29	---	---	Peak
2483.500	32.40	5.87	34.53	51.50	55.24	74.00	18.76	Peak
2484.600	32.42	5.87	34.53	53.69	57.45	74.00	16.55	Peak

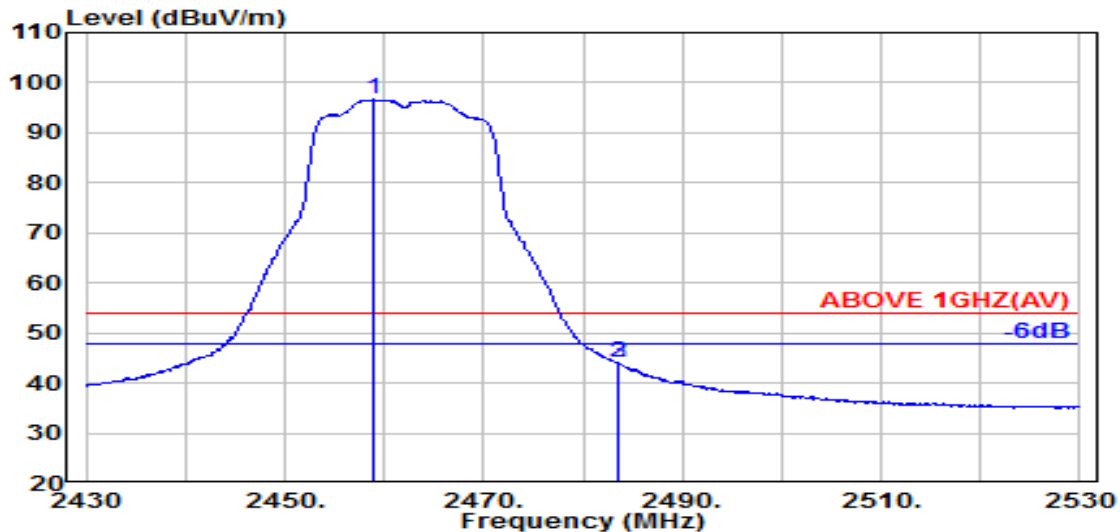


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.11	5.83	34.52	93.18	96.59	---	---	Average
2483.500	32.40	5.87	34.53	40.42	44.16	54.00	9.84	Average
2483.600	32.40	5.87	34.53	40.41	44.15	54.00	9.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

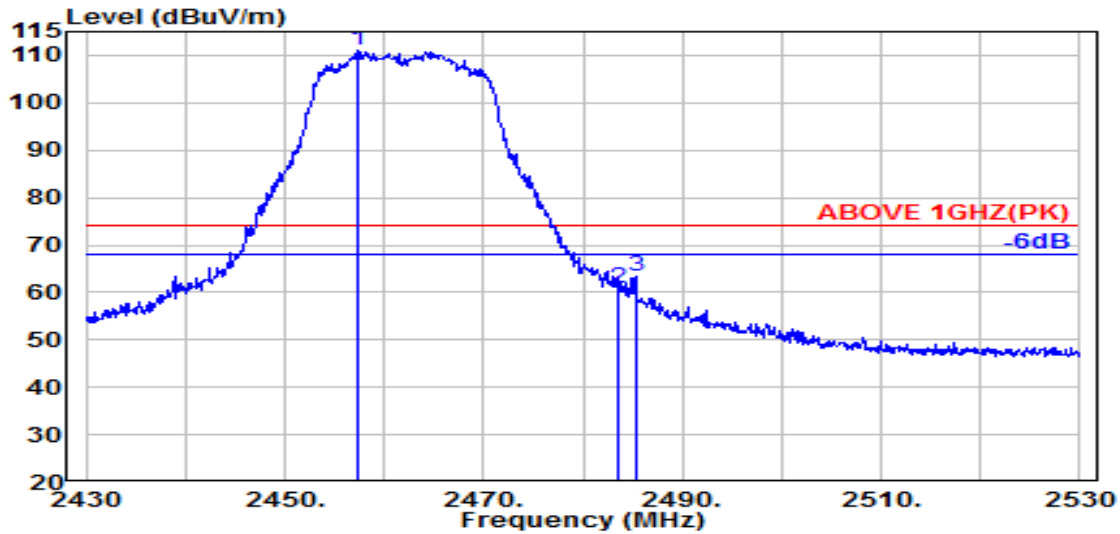

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.400	32.09	5.83	34.52	107.64	111.03	---	---	Peak
2483.500	32.40	5.87	34.53	56.99	60.73	74.00	13.27	Peak
2485.300	32.42	5.87	34.53	59.68	63.45	74.00	10.55	Peak

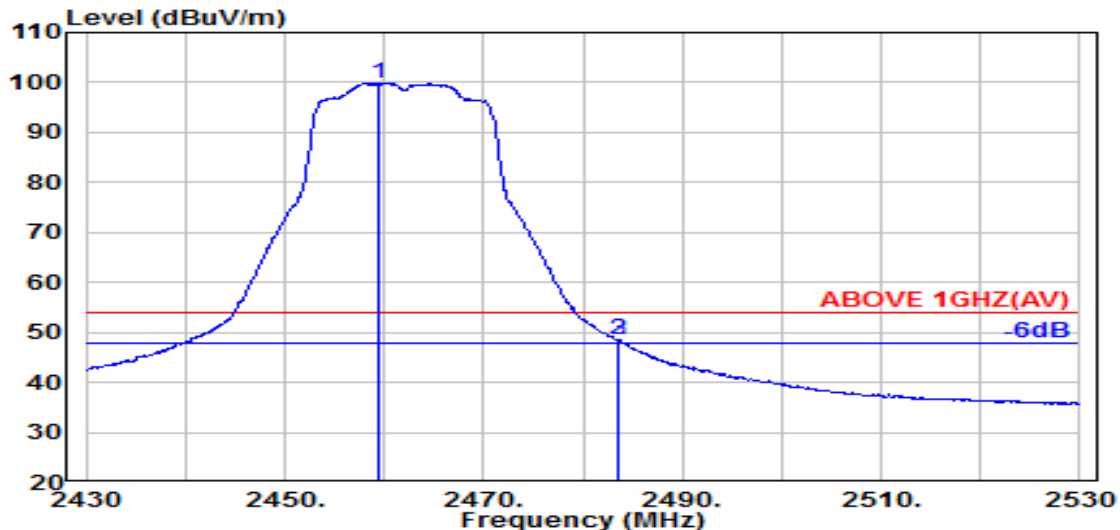


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.400	32.11	5.83	34.52	96.48	99.90	---	---	Average
2483.500	32.40	5.87	34.53	44.81	48.55	54.00	5.45	Average
2483.600	32.40	5.87	34.53	44.71	48.45	54.00	5.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

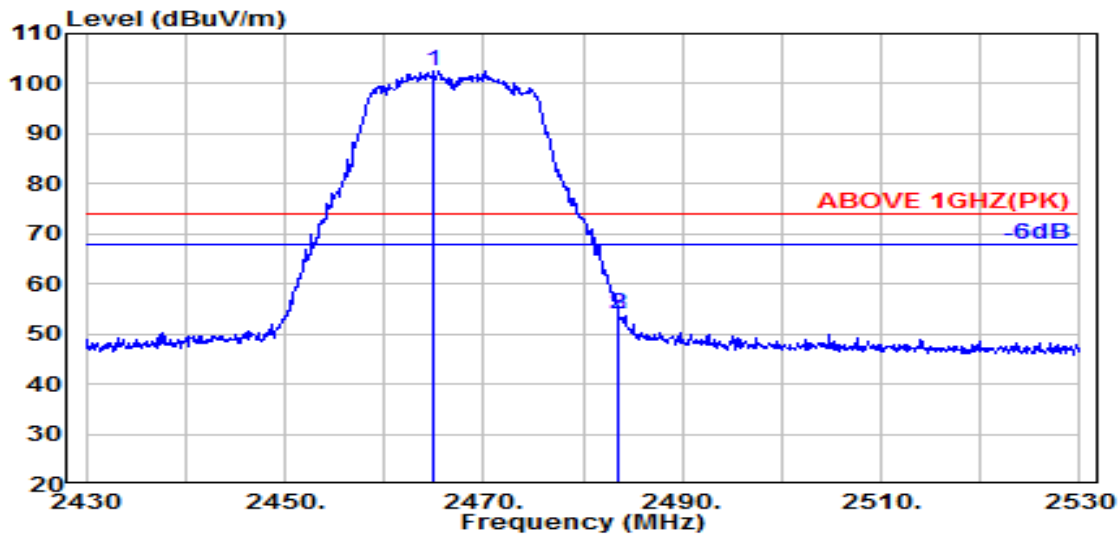

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.18	5.84	34.52	98.98	102.48	---	---	Peak
2483.500	32.40	5.87	34.53	50.25	53.99	74.00	20.01	Peak
2483.600	32.40	5.87	34.53	50.21	53.95	74.00	20.05	Peak

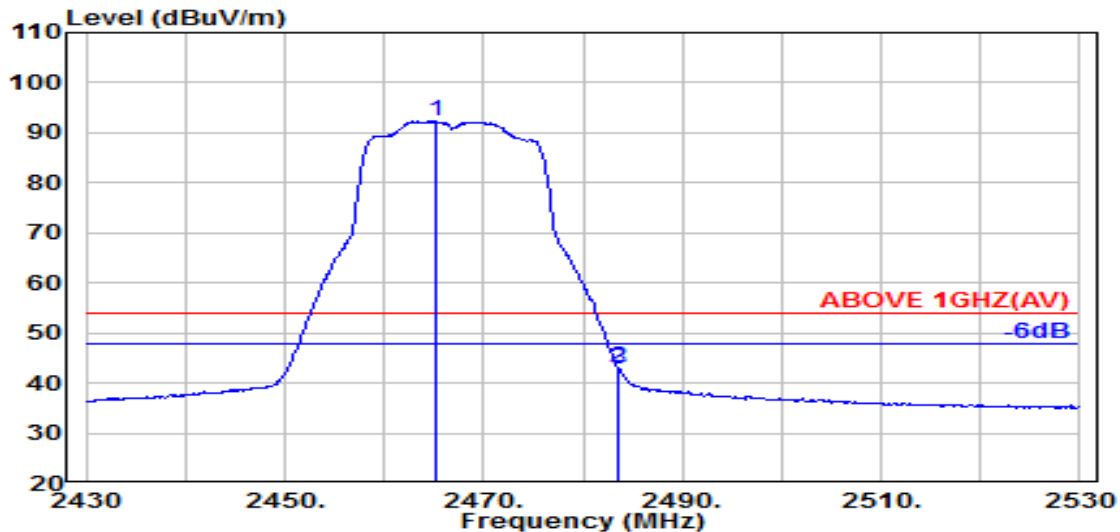


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	32.18	5.84	34.52	88.78	92.28	---	---	Average
2483.500	32.40	5.87	34.53	39.40	43.15	54.00	10.85	Average
2483.600	32.40	5.87	34.53	38.95	42.69	54.00	11.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

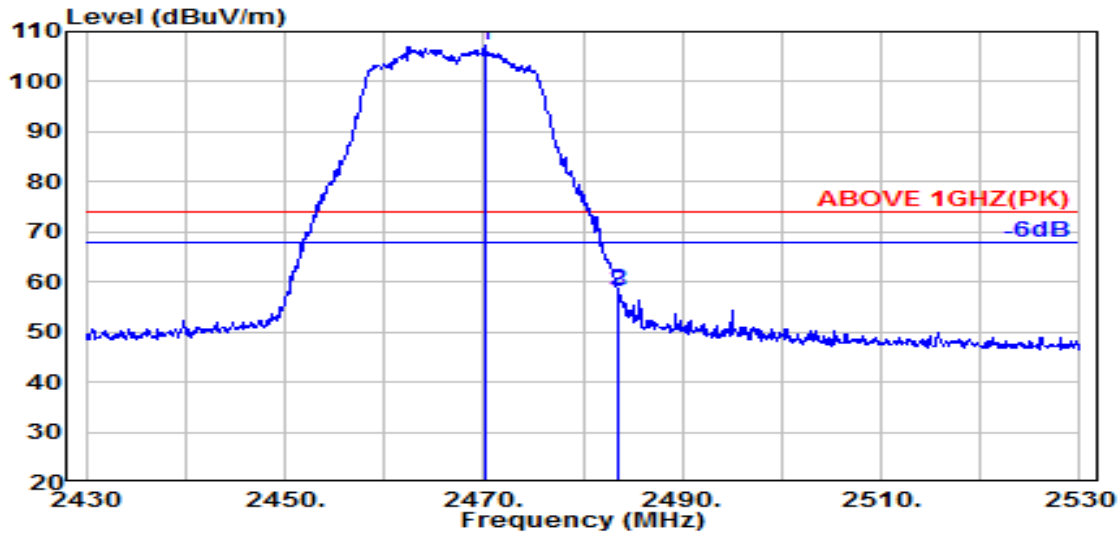

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.300	32.25	5.85	34.52	103.62	107.19	---	---	Peak
2483.500	32.40	5.87	34.53	54.56	58.30	74.00	15.70	Peak
2483.600	32.40	5.87	34.53	54.31	58.05	74.00	15.95	Peak

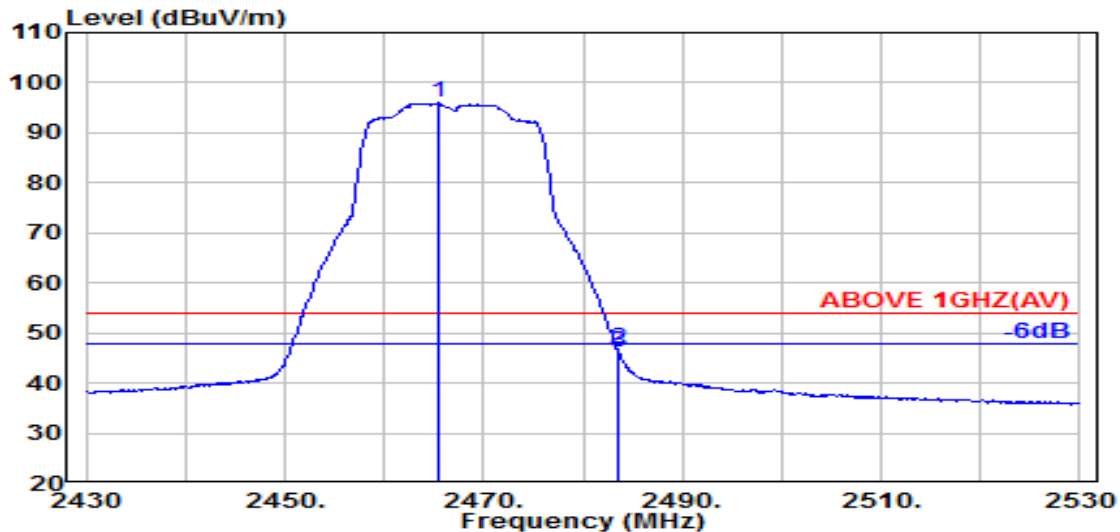


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.19	5.84	34.52	92.42	95.93	---	---	Average
2483.500	32.40	5.87	34.53	42.93	46.67	54.00	7.33	Average
2483.600	32.40	5.87	34.53	42.30	46.04	54.00	7.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

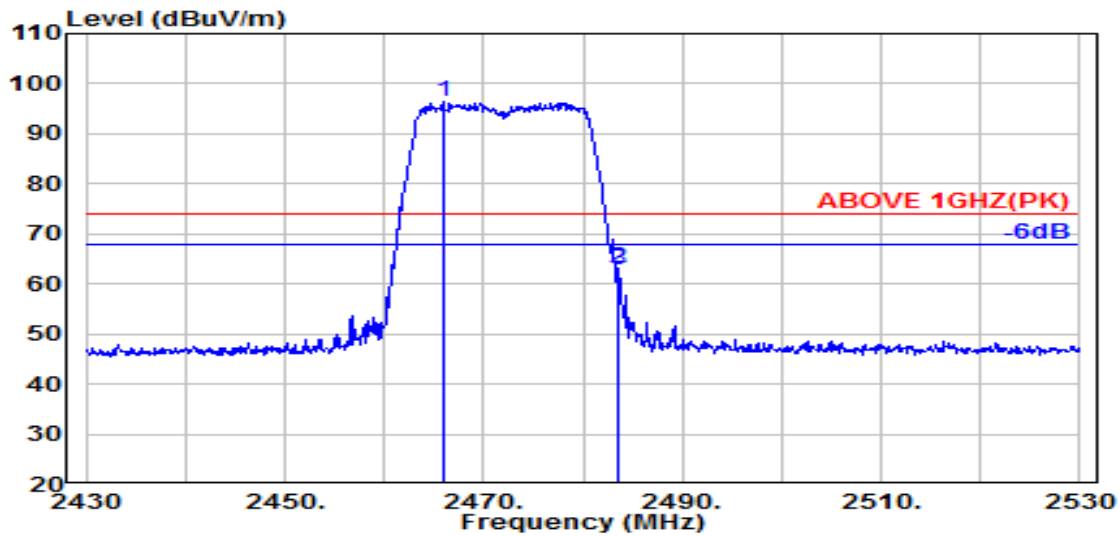

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.900	32.19	5.84	34.52	93.06	96.57	---	---	Peak
2483.500	32.40	5.87	34.53	59.49	63.24	74.00	10.76	Peak
2483.600	32.40	5.87	34.53	58.97	62.72	74.00	11.28	Peak

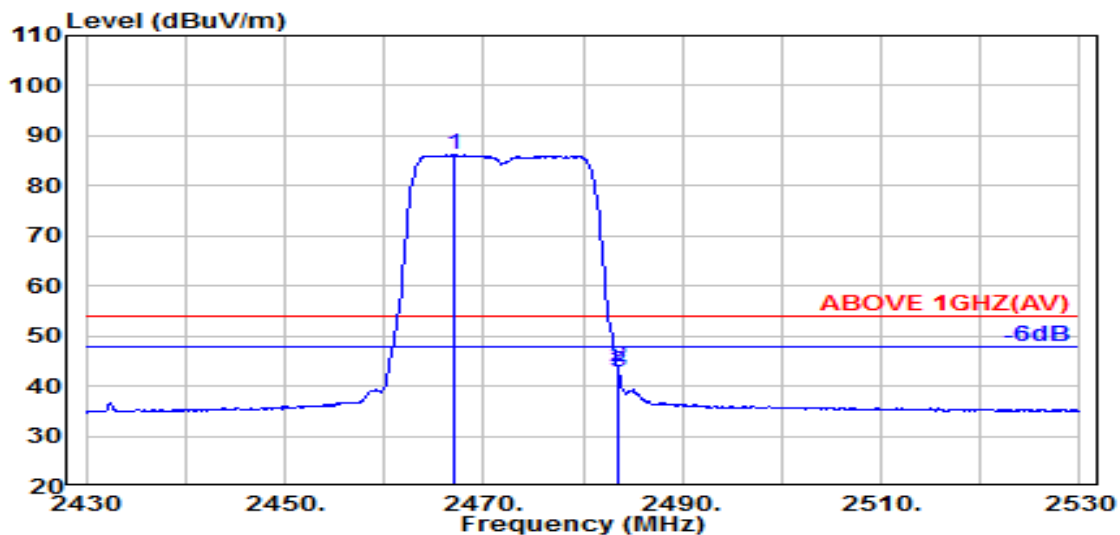


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.100	32.21	5.84	34.52	82.74	86.26	---	---	Average
2483.500	32.40	5.87	34.53	39.98	43.72	54.00	10.28	Average
2483.600	32.40	5.87	34.53	38.96	42.70	54.00	11.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

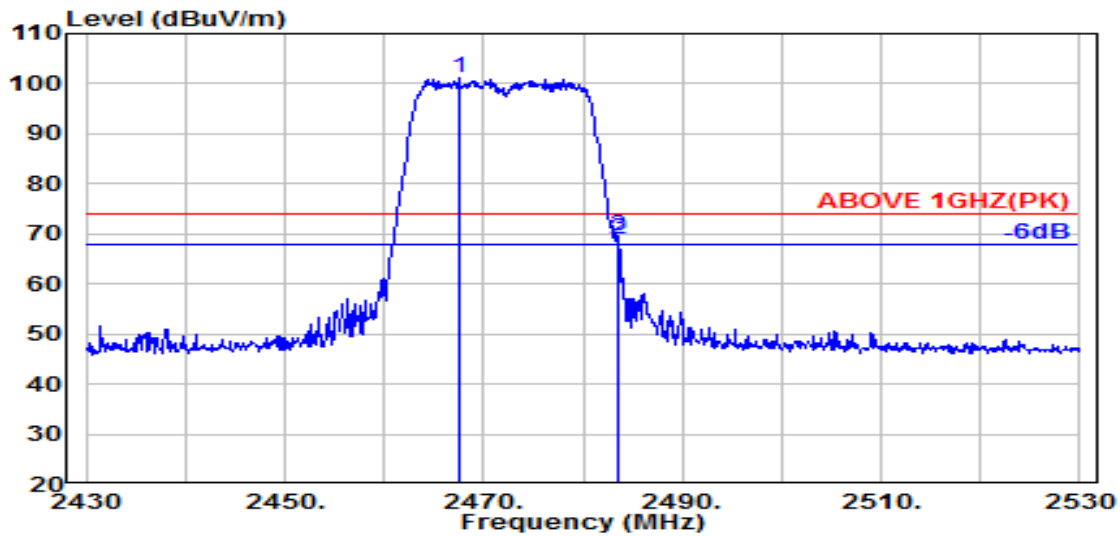

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.21	5.84	34.52	97.47	101.00	---	---	Peak
2483.500	32.40	5.87	34.53	65.24	68.98	74.00	5.02	Peak
2483.600	32.40	5.87	34.53	65.77	69.51	74.00	4.49	Peak

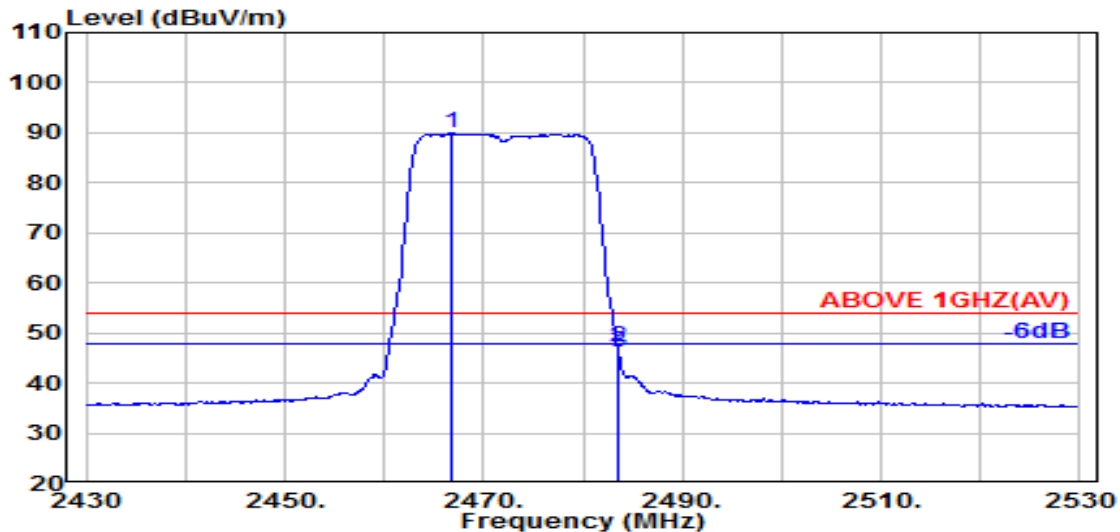


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.700	32.20	5.84	34.52	86.38	89.89	---	---	Average
2483.500	32.40	5.87	34.53	43.54	47.28	54.00	6.72	Average
2483.600	32.40	5.87	34.53	42.48	46.22	54.00	7.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

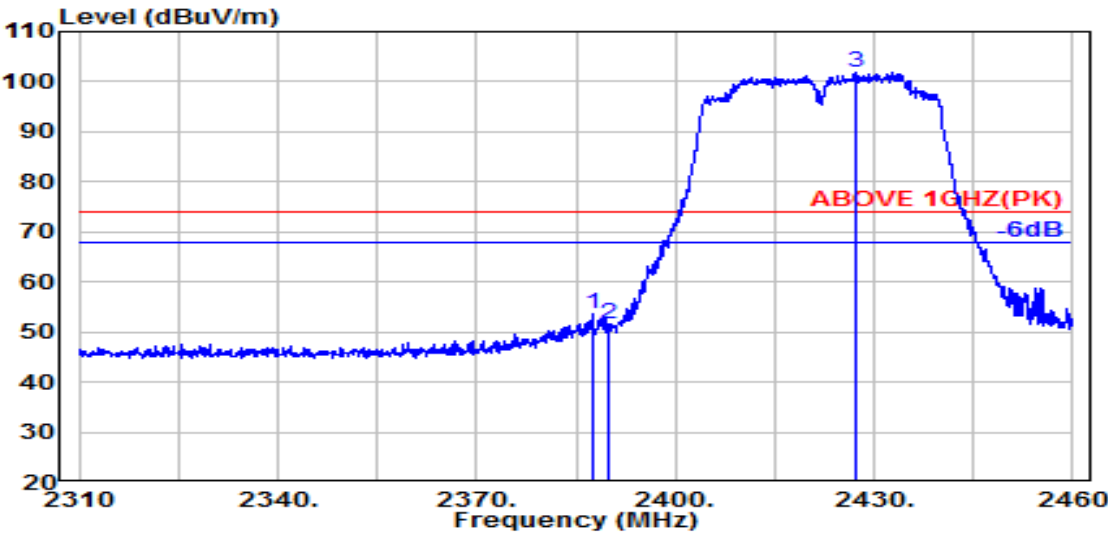

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2387.400	32.00	5.72	34.51	50.56	53.77	74.00	20.23	Peak
2390.000	32.00	5.72	34.51	48.49	51.70	74.00	22.30	Peak
@ 2427.100	32.00	5.78	34.52	98.72	101.98	---	---	Peak

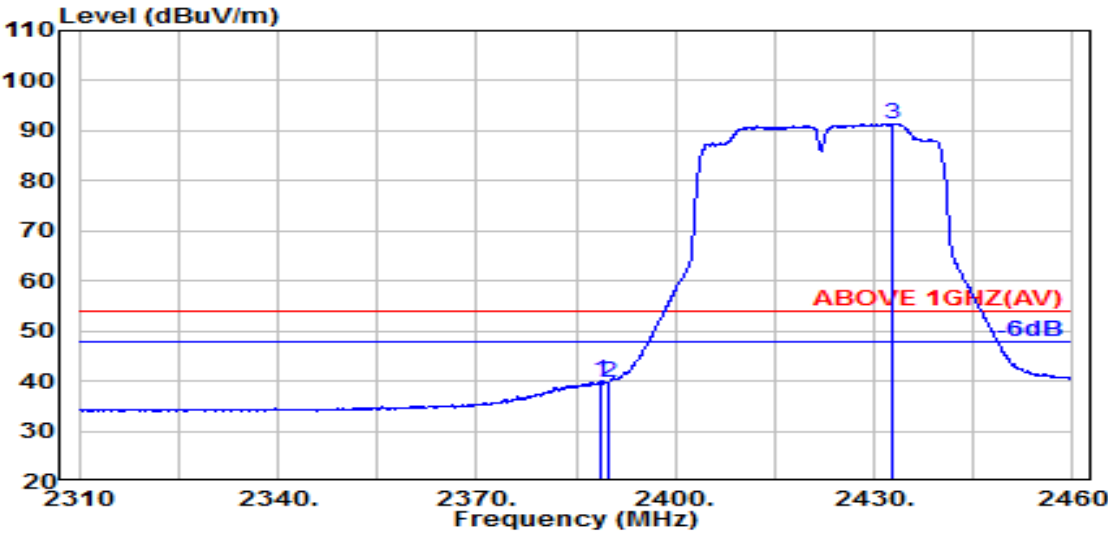


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	32.00	5.72	34.51	36.80	40.01	54.00	13.99	Average
2390.000	32.00	5.72	34.51	36.62	39.84	54.00	14.16	Average
@ 2432.700	32.00	5.79	34.52	88.17	91.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

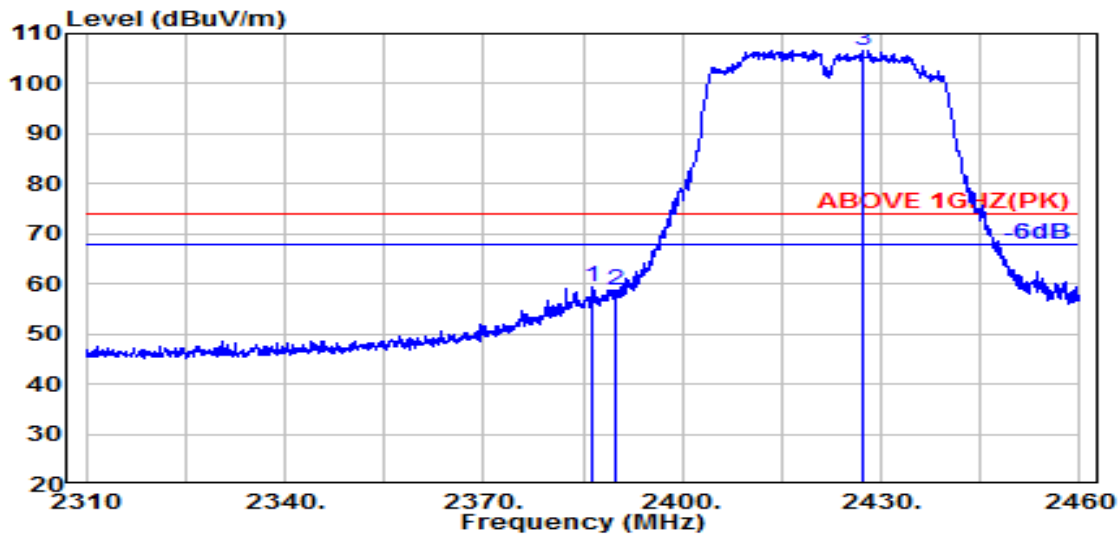

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	32.00	5.72	34.51	56.10	59.31	74.00	14.69	Peak
2390.000	32.00	5.72	34.51	55.62	58.83	74.00	15.17	Peak
@ 2427.100	32.00	5.78	34.52	103.39	106.66	---	---	Peak

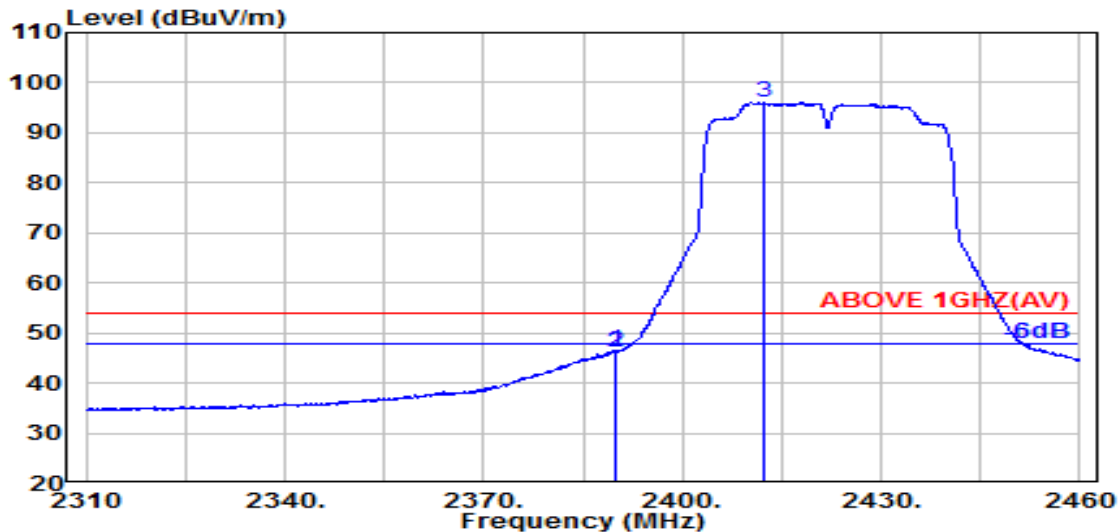


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.800	32.00	5.72	34.51	43.18	46.40	54.00	7.60	Average
2390.000	32.00	5.72	34.51	43.09	46.31	54.00	7.69	Average
@ 2412.300	32.00	5.76	34.51	92.83	96.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

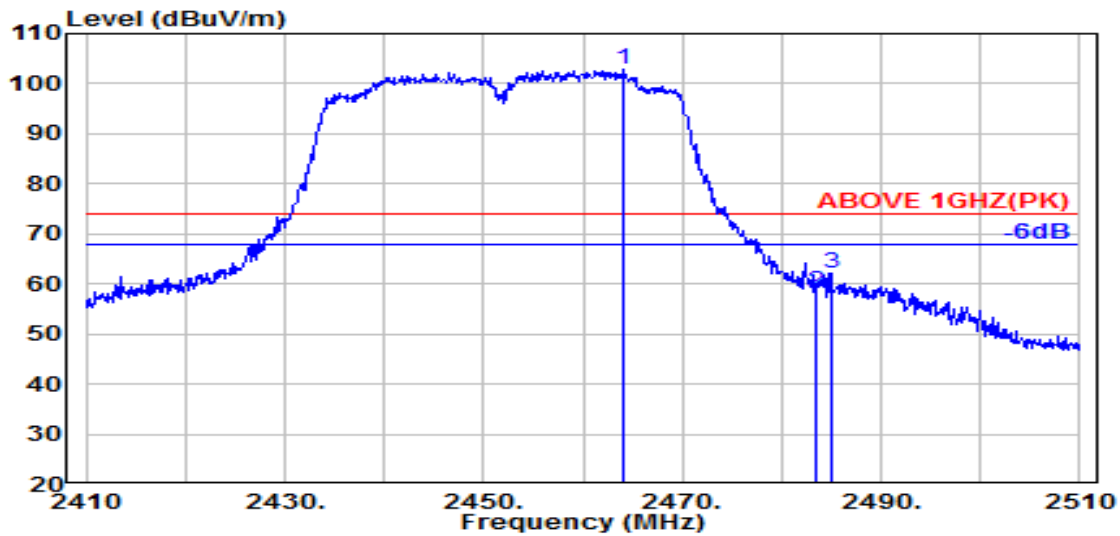

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	32.17	5.84	34.52	99.26	102.74	---	---	Peak
2483.500	32.40	5.87	34.53	54.76	58.50	74.00	15.50	Peak
2485.000	32.42	5.87	34.53	58.25	62.01	74.00	11.99	Peak

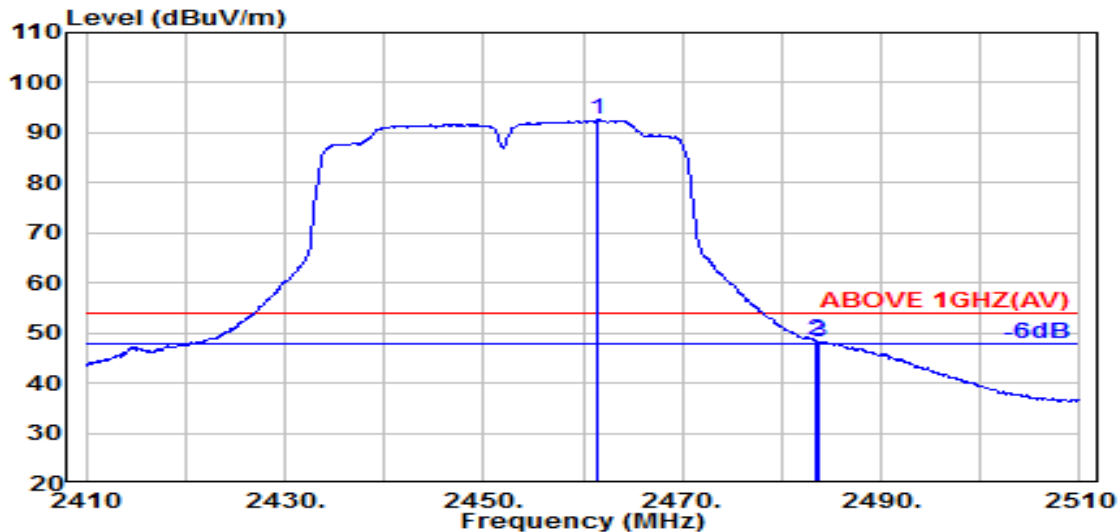


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	32.14	5.83	34.52	89.09	92.54	---	---	Average
2483.500	32.40	5.87	34.53	44.72	48.47	54.00	5.53	Average
2483.700	32.41	5.87	34.53	44.57	48.31	54.00	5.69	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

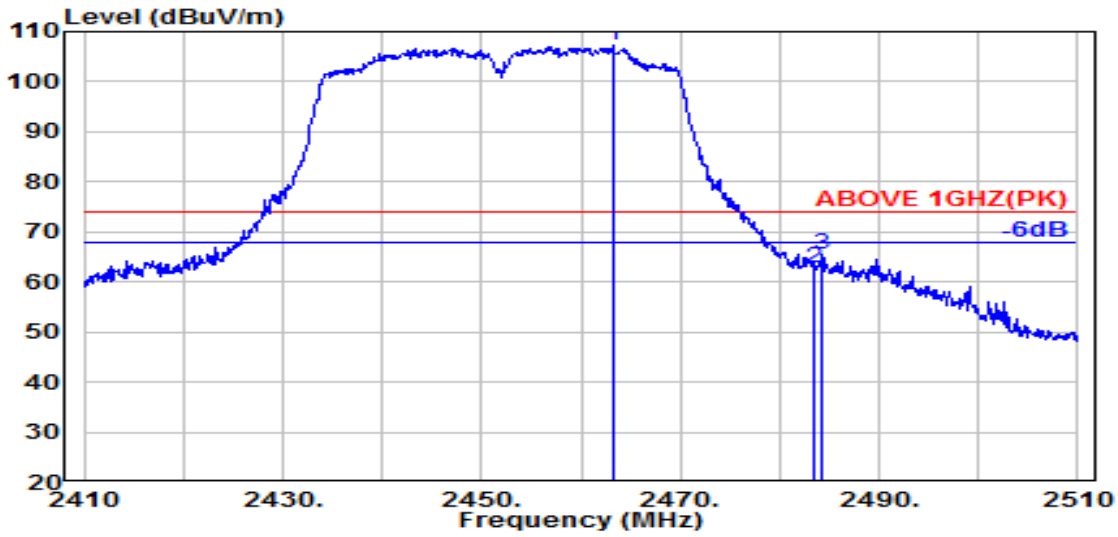

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	32.16	5.83	34.52	103.73	107.21	---	---	Peak
2483.500	32.40	5.87	34.53	59.03	62.77	74.00	11.23	Peak
2484.200	32.41	5.87	34.53	61.79	65.54	74.00	8.46	Peak

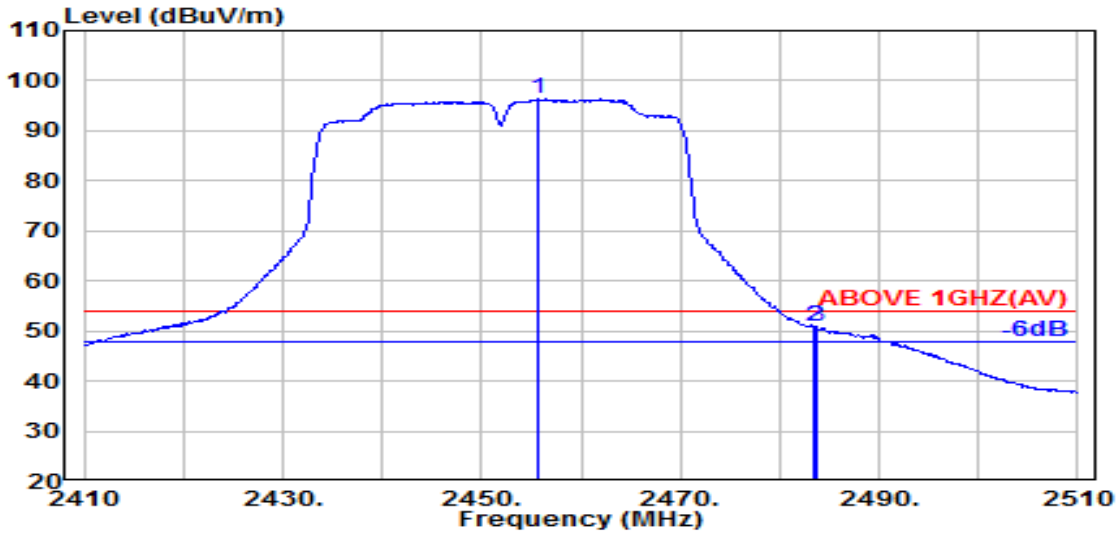


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.800	32.07	5.82	34.52	92.93	96.30	---	---	Average
2483.500	32.40	5.87	34.53	47.14	50.88	54.00	3.12	Average
2483.600	32.40	5.87	34.53	47.16	50.90	54.00	3.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

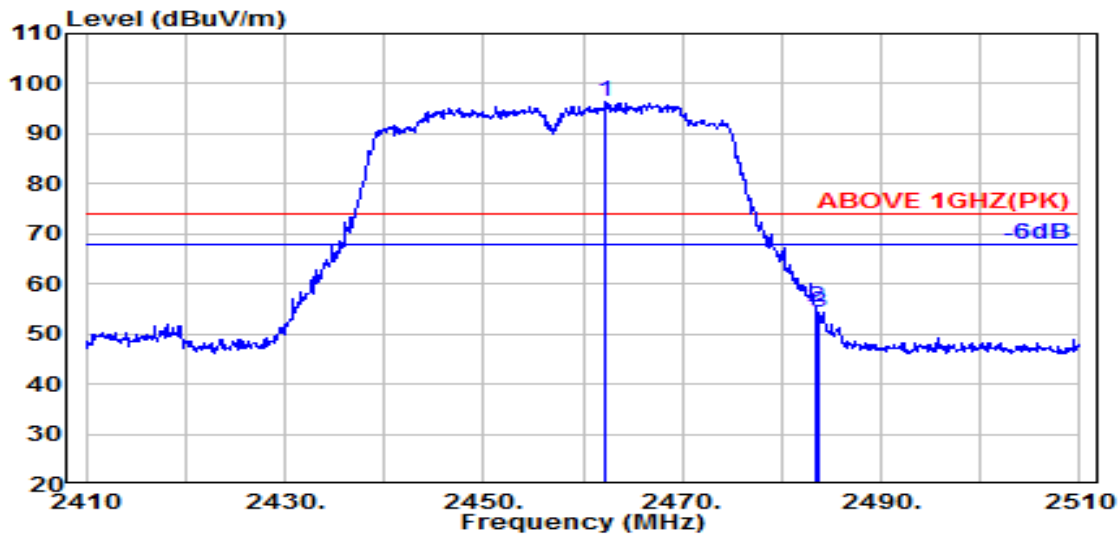

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.300	32.15	5.83	34.52	92.92	96.38	---	---	Peak
2483.500	32.40	5.87	34.53	51.60	55.34	74.00	18.66	Peak
2483.700	32.41	5.87	34.53	50.52	54.26	74.00	19.74	Peak

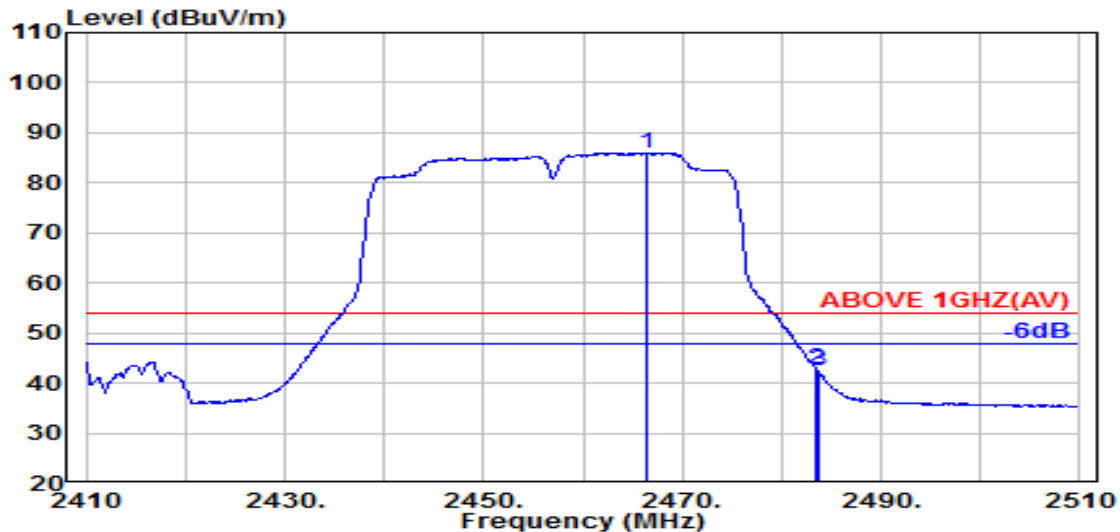


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	32.20	5.84	34.52	82.49	86.00	---	---	Average
2483.500	32.40	5.87	34.53	38.98	42.72	54.00	11.28	Average
2483.600	32.40	5.87	34.53	38.69	42.44	54.00	11.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

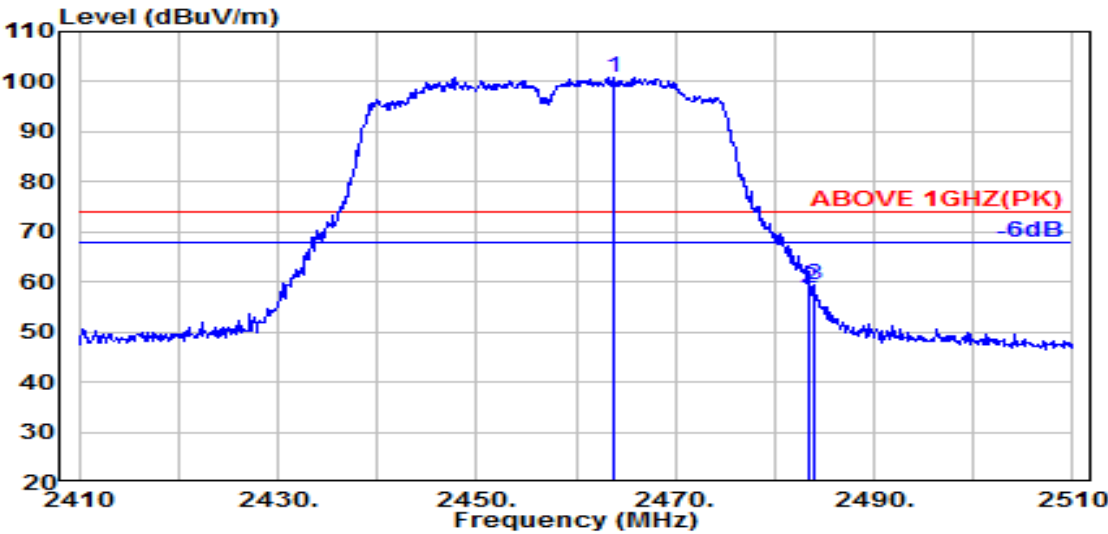

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.700	32.17	5.84	34.52	97.49	100.97	---	---	Peak
2483.500	32.40	5.87	34.53	55.13	58.87	74.00	15.13	Peak
2483.900	32.41	5.87	34.53	55.74	59.48	74.00	14.52	Peak

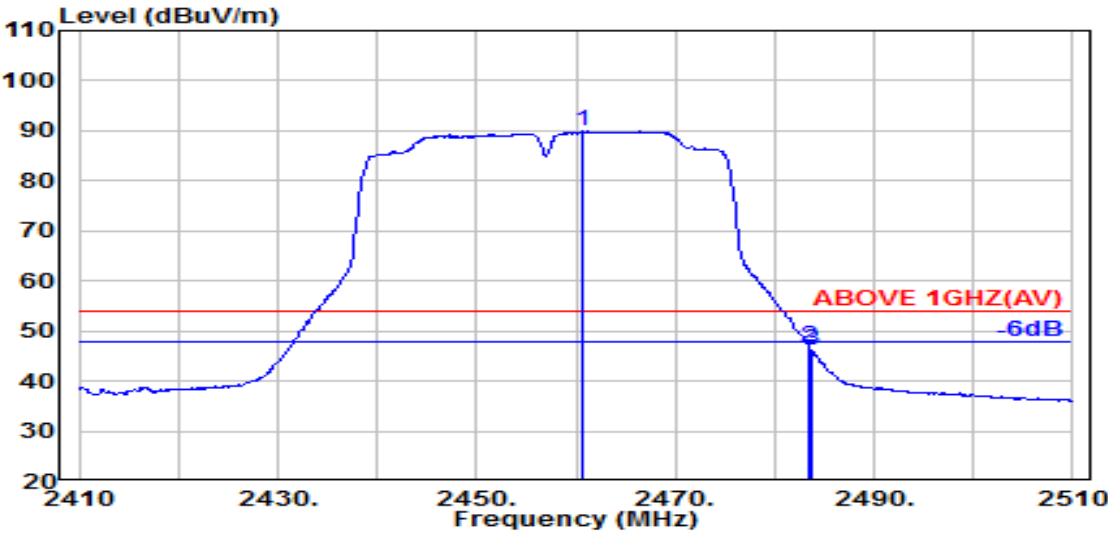


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.600	32.13	5.83	34.52	86.45	89.88	---	---	Average
2483.500	32.40	5.87	34.53	42.97	46.71	54.00	7.29	Average
2483.600	32.40	5.87	34.53	42.52	46.27	54.00	7.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

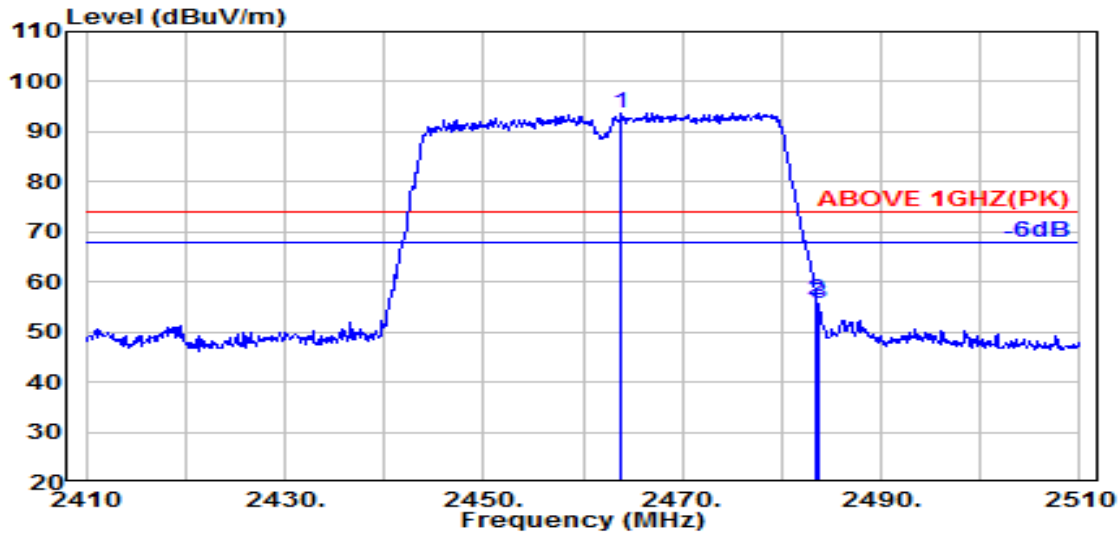

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	32.17	5.84	34.52	90.38	93.86	---	---	Peak
2483.500	32.40	5.87	34.53	52.66	56.41	74.00	17.59	Peak
2483.700	32.41	5.87	34.53	51.90	55.64	74.00	18.36	Peak

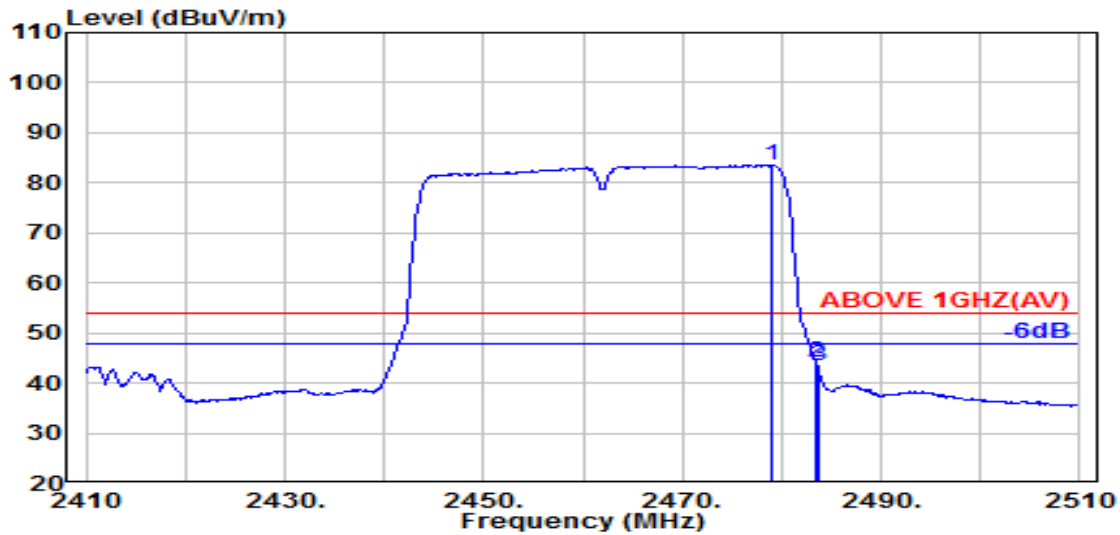


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	32.35	5.86	34.53	79.93	83.62	---	---	Average
2483.500	32.40	5.87	34.53	40.24	43.98	54.00	10.02	Average
2483.600	32.40	5.87	34.53	39.67	43.42	54.00	10.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

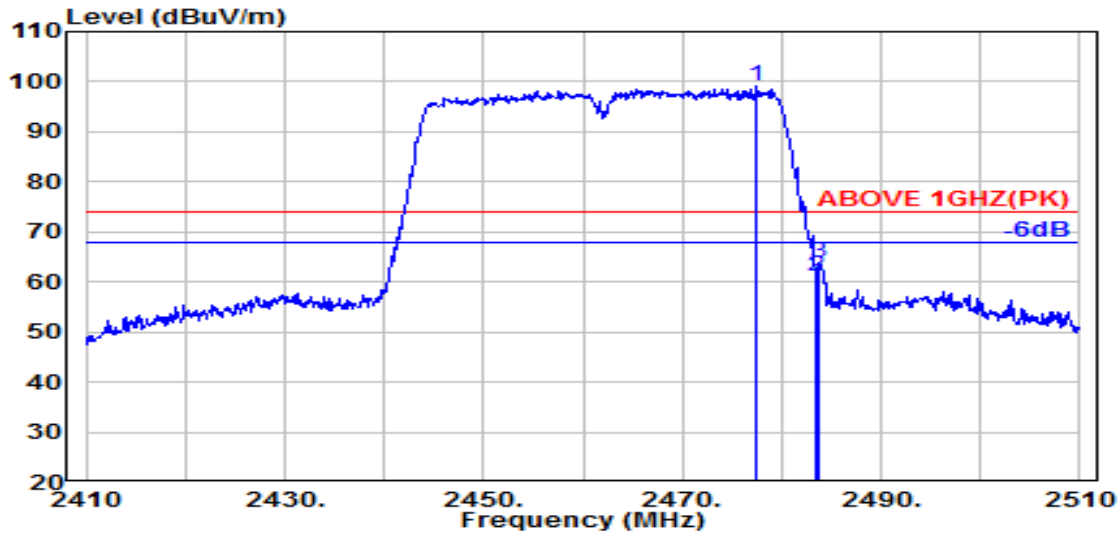

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.400	32.33	5.86	34.53	95.54	99.20	---	---	Peak
2483.500	32.40	5.87	34.53	57.29	61.04	74.00	12.96	Peak
2483.800	32.41	5.87	34.53	60.16	63.90	74.00	10.10	Peak

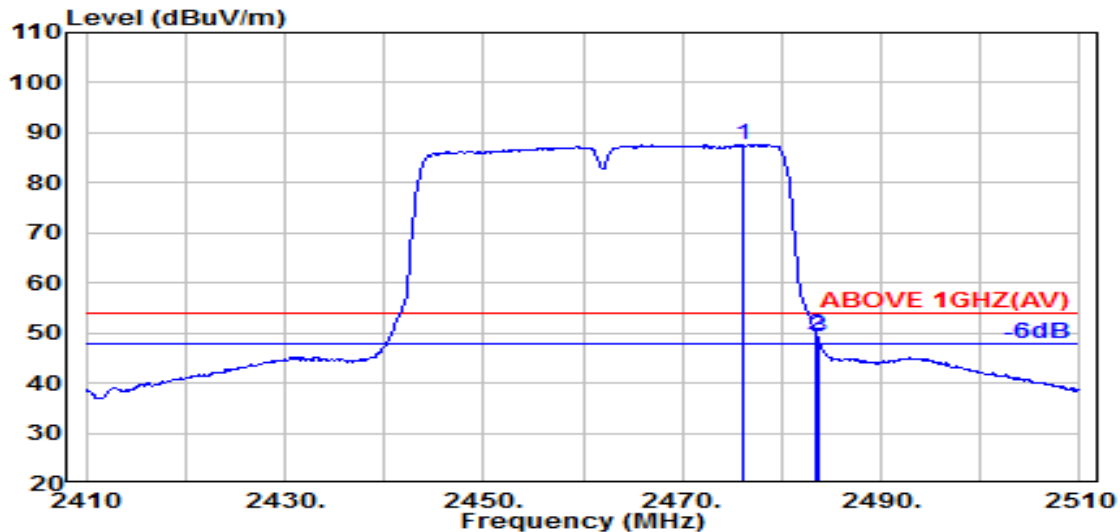


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.100	32.31	5.85	34.53	84.03	87.67	---	---	Average
2483.500	32.40	5.87	34.53	45.93	49.67	54.00	4.33	Average
2483.600	32.40	5.87	34.53	45.36	49.10	54.00	4.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

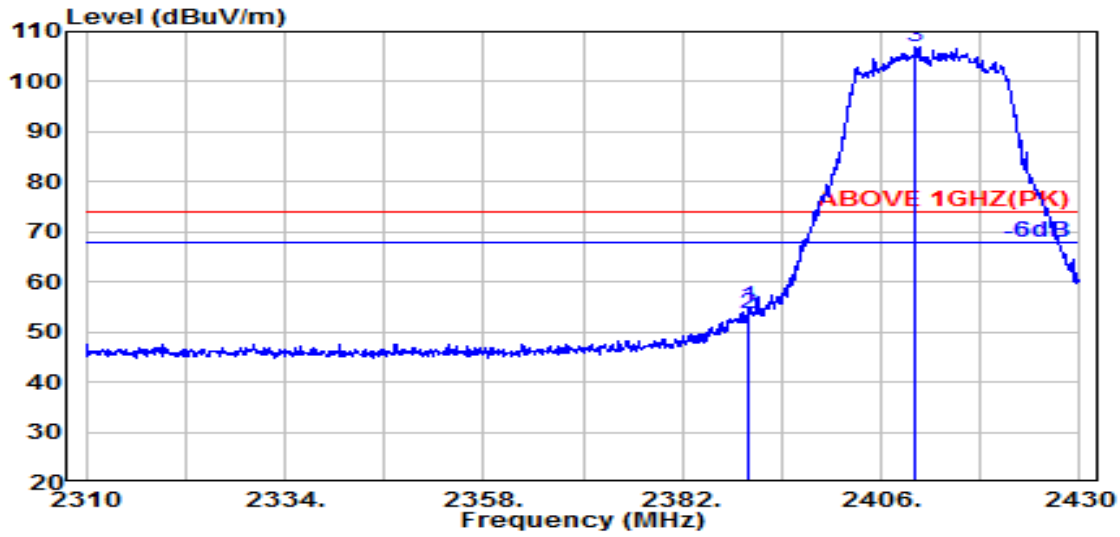

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	51.65	54.87	74.00	19.13	Peak
2390.000	32.00	5.72	34.51	50.28	53.49	74.00	20.51	Peak
@ 2410.200	32.00	5.75	34.51	103.77	107.02	---	---	Peak

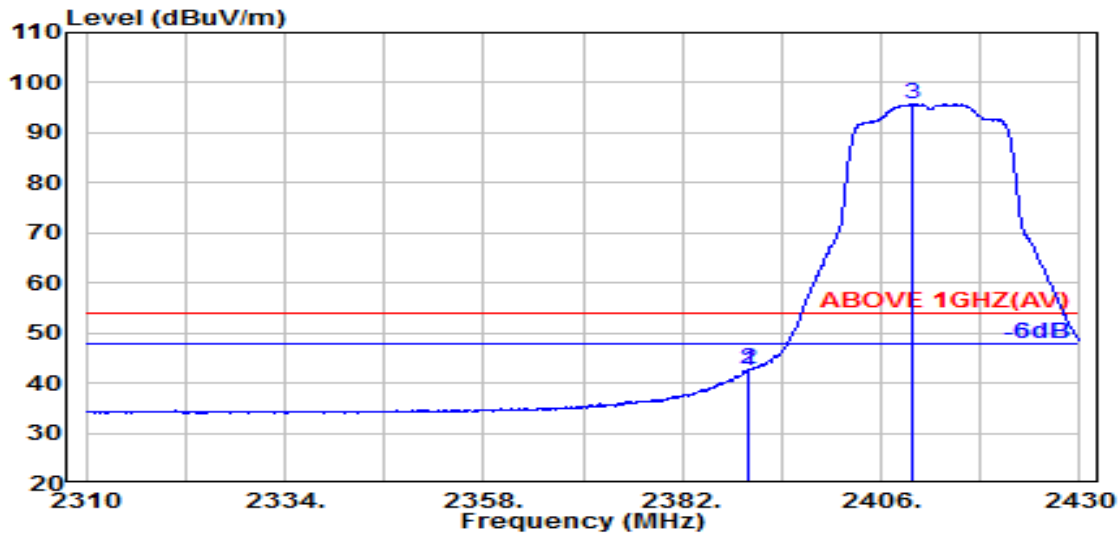


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	39.26	42.48	54.00	11.52	Average
2390.000	32.00	5.72	34.51	39.44	42.65	54.00	11.35	Average
@ 2409.900	32.00	5.75	34.51	92.49	95.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

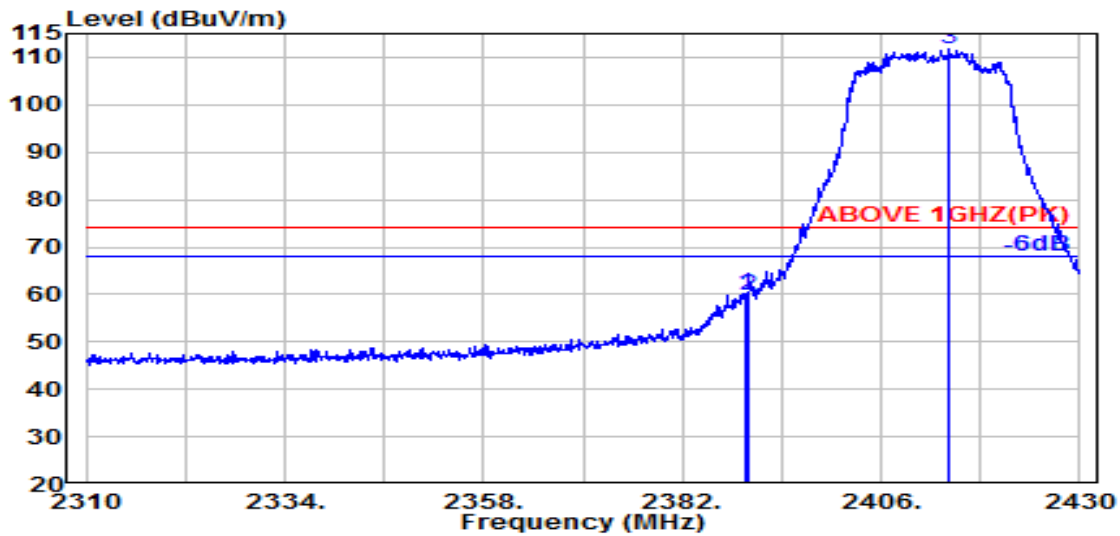

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	32.00	5.72	34.51	57.11	60.32	74.00	13.68	Peak
2390.000	32.00	5.72	34.51	56.47	59.68	74.00	14.32	Peak
@ 2414.300	32.00	5.76	34.51	108.46	111.71	---	---	Peak

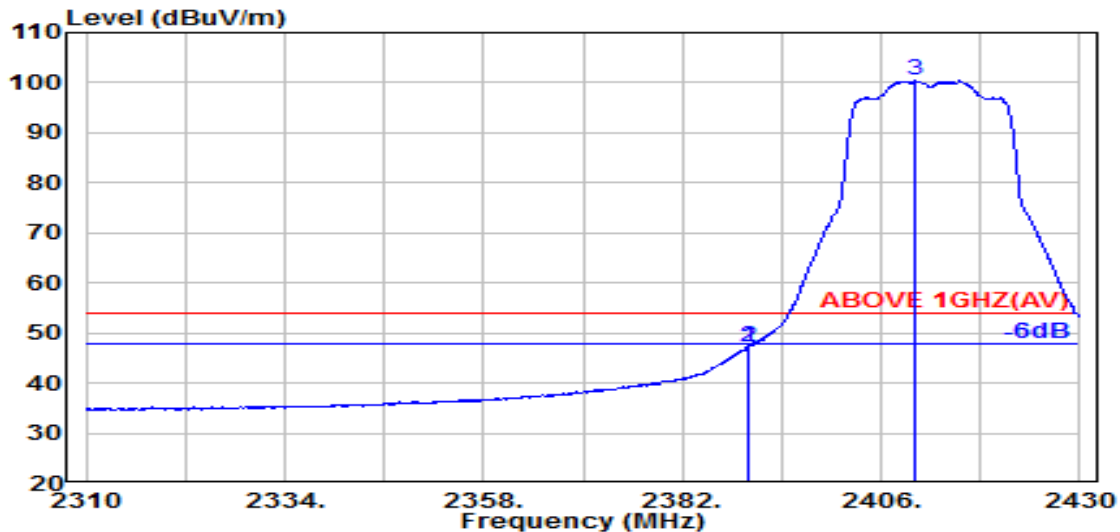


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	44.05	47.27	54.00	6.73	Average
2390.000	32.00	5.72	34.51	44.11	47.32	54.00	6.68	Average
@ 2410.100	32.00	5.75	34.51	97.24	100.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

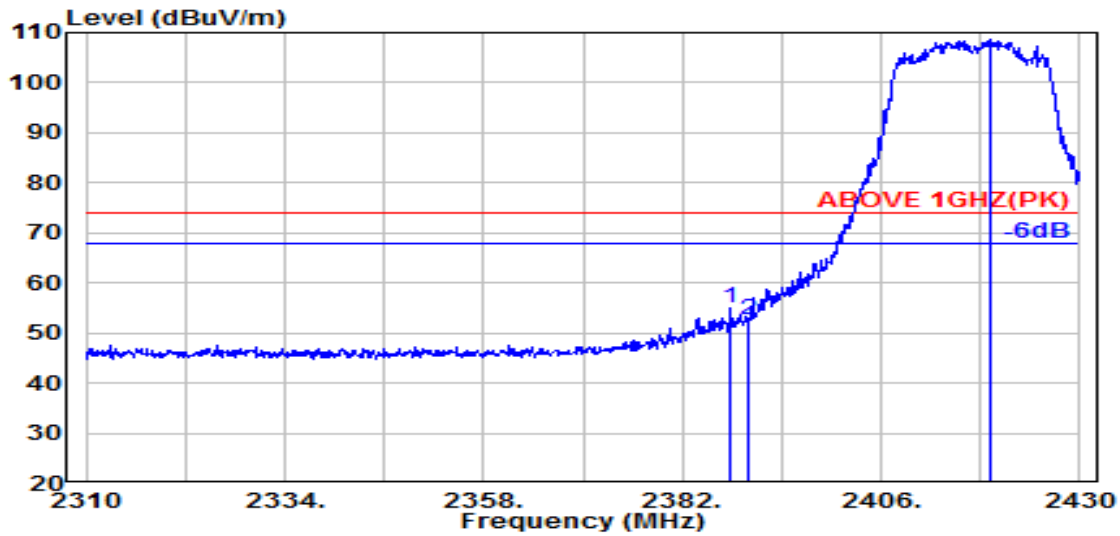

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.900	32.00	5.72	34.51	51.90	55.12	74.00	18.88	Peak
2390.000	32.00	5.72	34.51	49.23	52.44	74.00	21.56	Peak
@ 2419.100	32.00	5.77	34.51	105.25	108.51	---	---	Peak

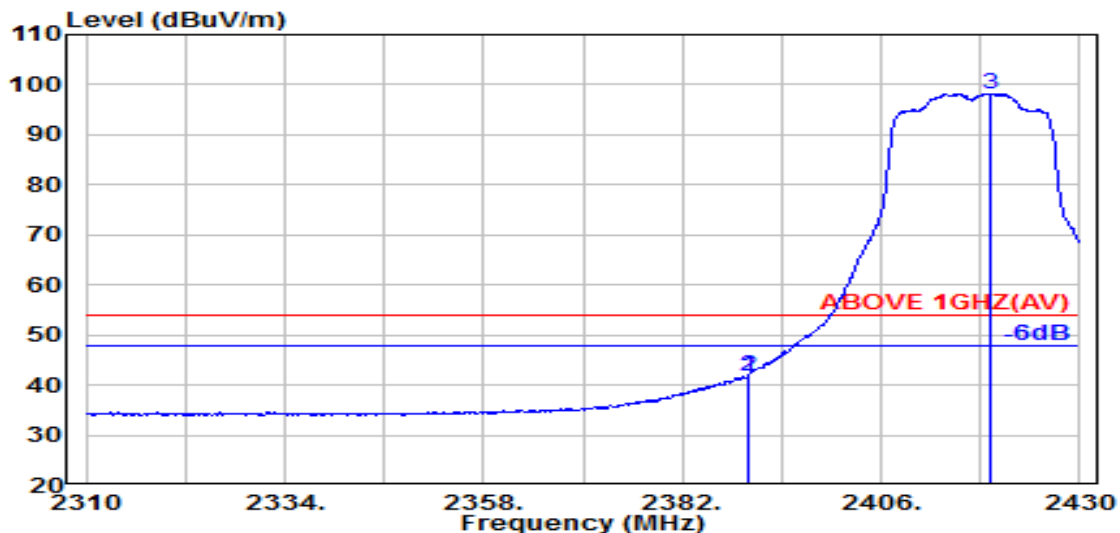


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	38.53	41.75	54.00	12.25	Average
2390.000	32.00	5.72	34.51	38.55	41.77	54.00	12.23	Average
@ 2419.300	32.00	5.77	34.51	95.02	98.28	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

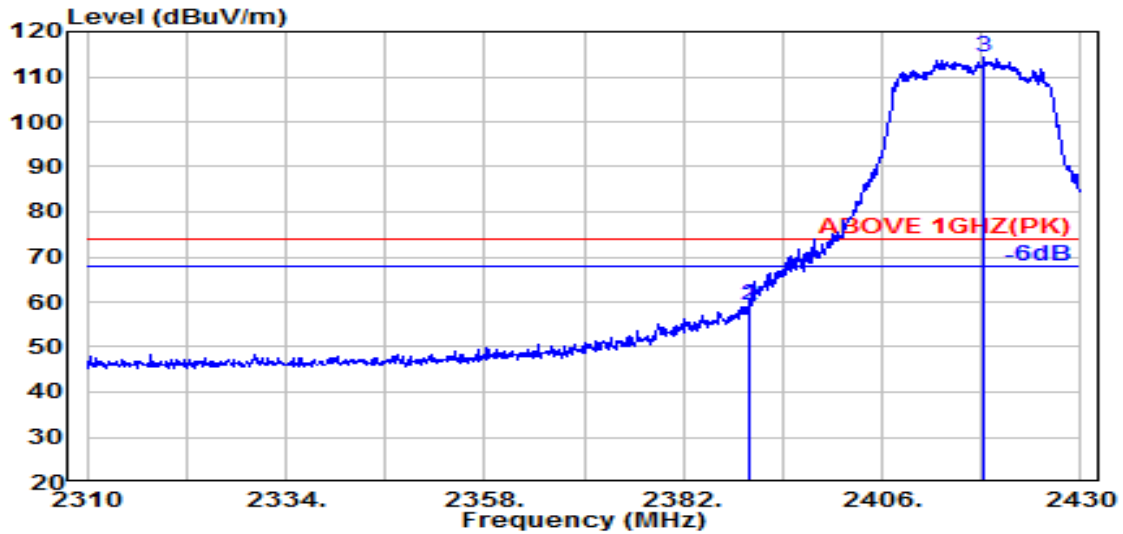

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	55.85	59.06	74.00	14.94	Peak
2390.000	32.00	5.72	34.51	56.20	59.42	74.00	14.58	Peak
@ 2418.200	32.00	5.77	34.51	111.04	114.30	---	---	Peak

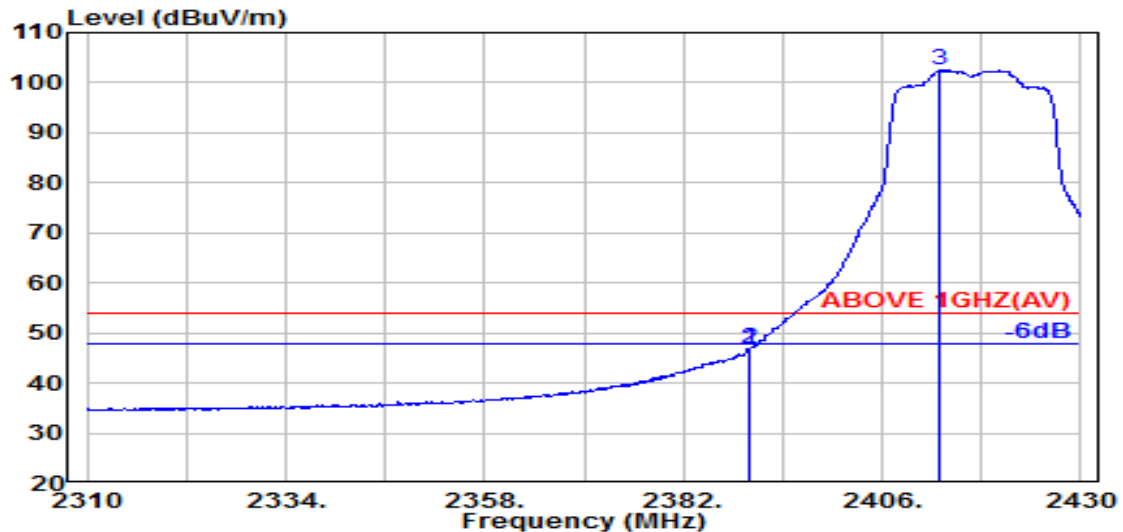


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	43.58	46.79	54.00	7.21	Average
2390.000	32.00	5.72	34.51	43.61	46.82	54.00	7.18	Average
@ 2412.900	32.00	5.76	34.51	99.31	102.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

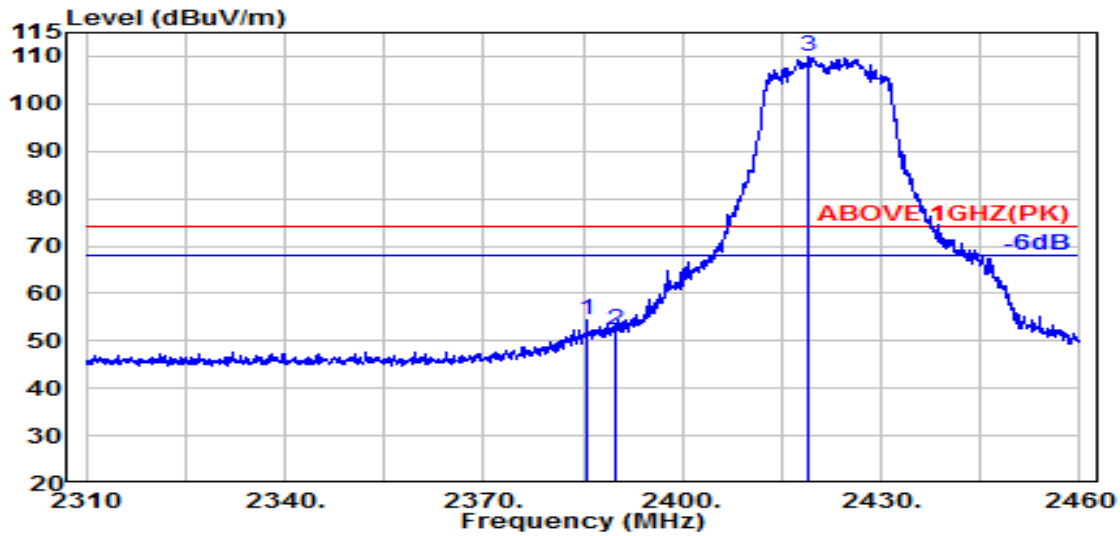

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.600	32.00	5.72	34.51	51.15	54.36	74.00	19.64	Peak
2390.000	32.00	5.72	34.51	49.02	52.24	74.00	21.76	Peak
@ 2418.900	32.00	5.77	34.51	106.65	109.90	---	---	Peak

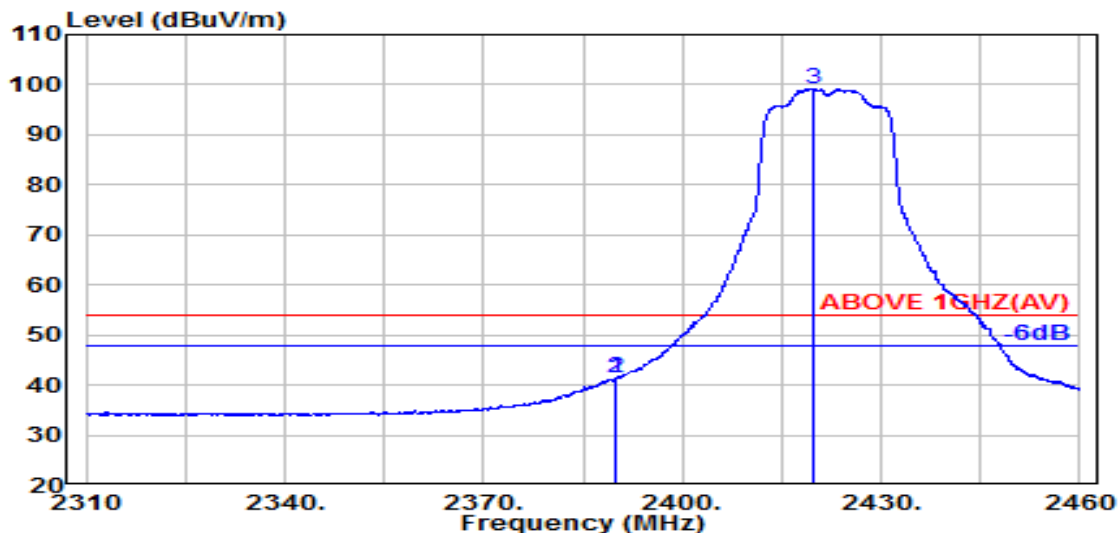


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	38.02	41.24	54.00	12.76	Average
2390.000	32.00	5.72	34.51	38.21	41.43	54.00	12.57	Average
@ 2419.600	32.00	5.77	34.51	95.88	99.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

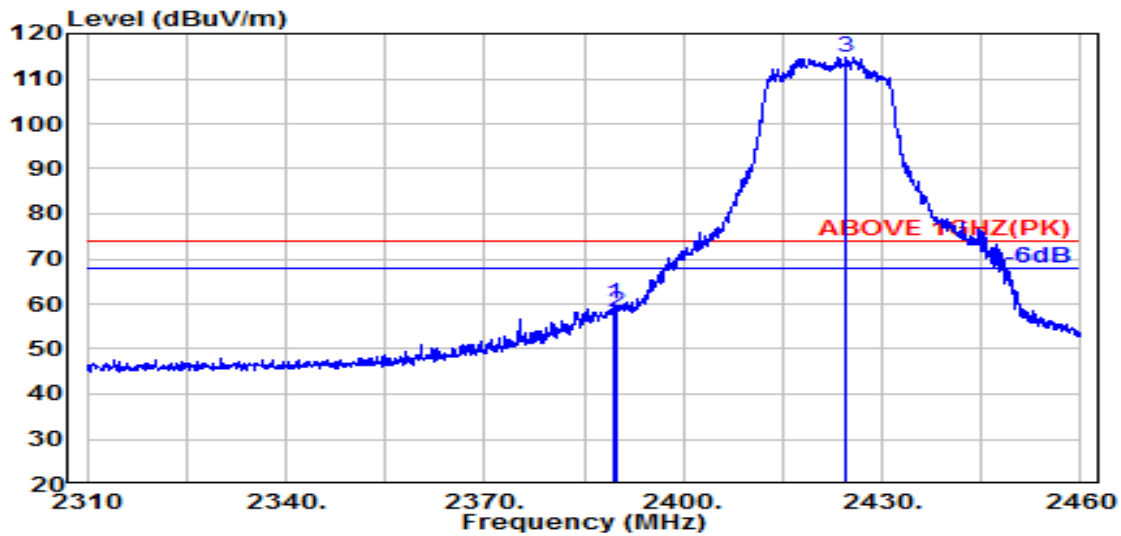

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	56.94	60.16	74.00	13.84	Peak
2390.000	32.00	5.72	34.51	55.01	58.22	74.00	15.78	Peak
@ 2424.400	32.00	5.78	34.51	111.37	114.63	---	---	Peak

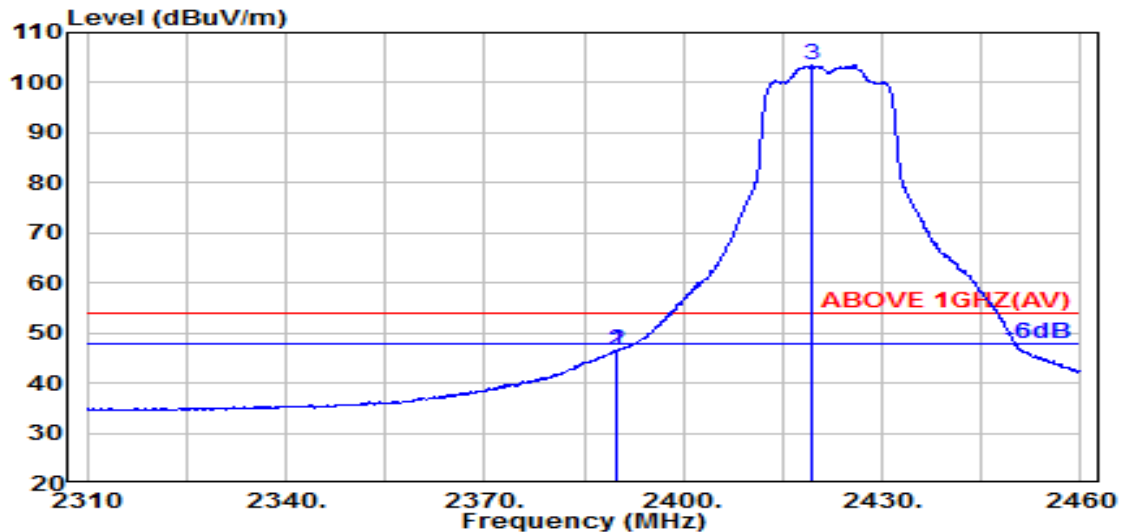


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	43.26	46.47	54.00	7.53	Average
2390.000	32.00	5.72	34.51	43.19	46.41	54.00	7.59	Average
@ 2419.400	32.00	5.77	34.51	100.20	103.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

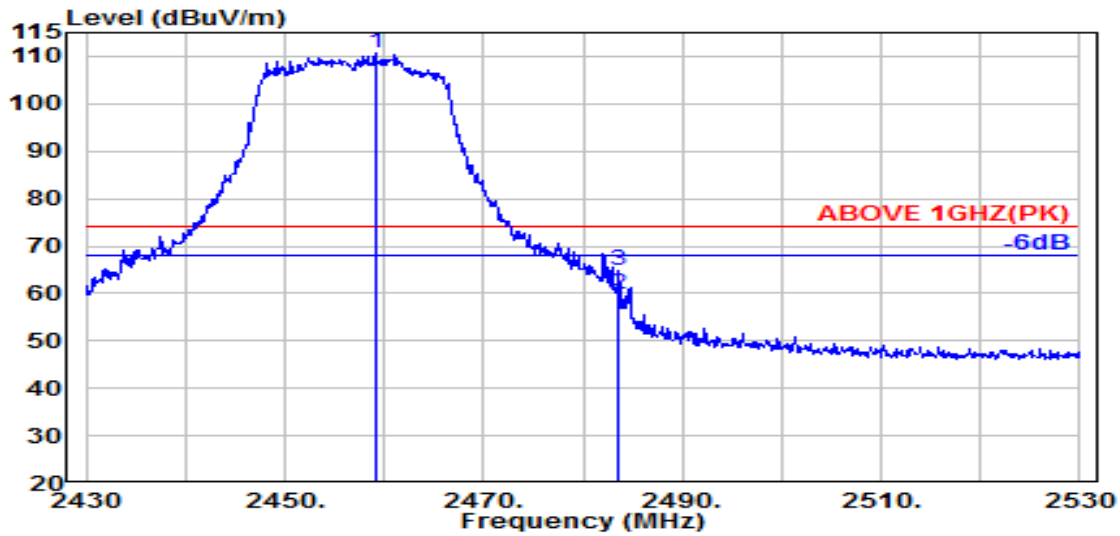

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.100	32.11	5.83	34.52	107.12	110.54	---	---	Peak
2483.500	32.40	5.87	34.53	56.03	59.77	74.00	14.23	Peak
2483.600	32.40	5.87	34.53	61.07	64.81	74.00	9.19	Peak

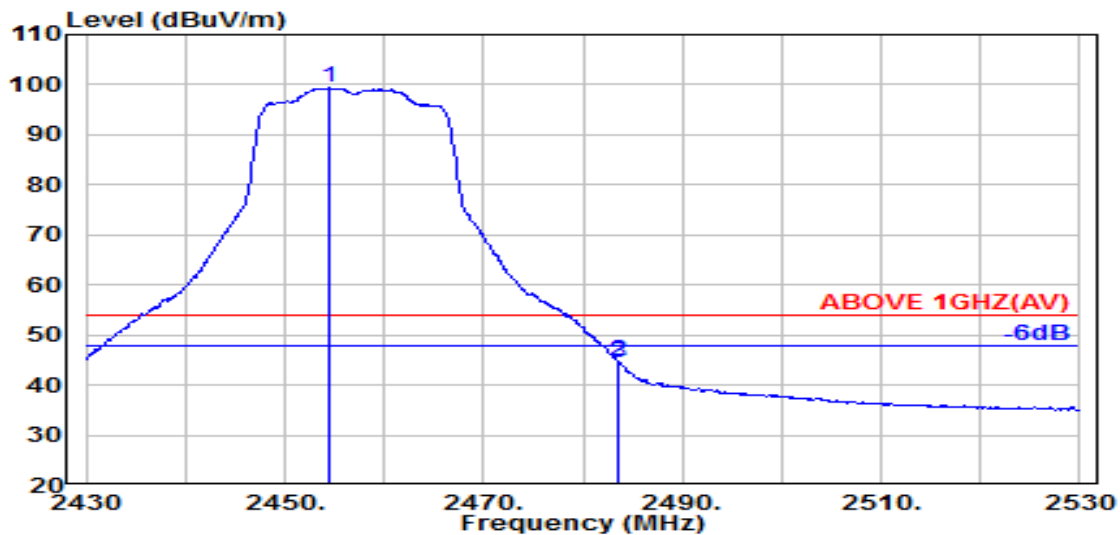


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.05	5.82	34.52	95.96	99.32	---	---	Average
2483.500	32.40	5.87	34.53	41.13	44.87	54.00	9.13	Average
2483.600	32.40	5.87	34.53	40.85	44.60	54.00	9.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

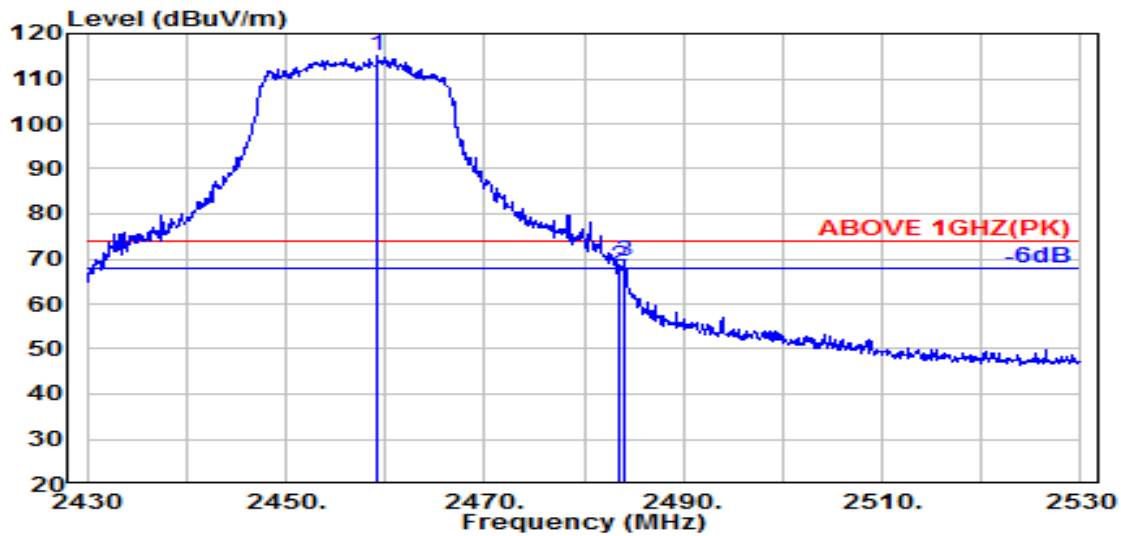

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	32.11	5.83	34.52	111.84	115.26	---	---	Peak
2483.500	32.40	5.87	34.53	64.55	68.29	74.00	5.71	Peak
2484.000	32.41	5.87	34.53	65.50	69.25	74.00	4.75	Peak

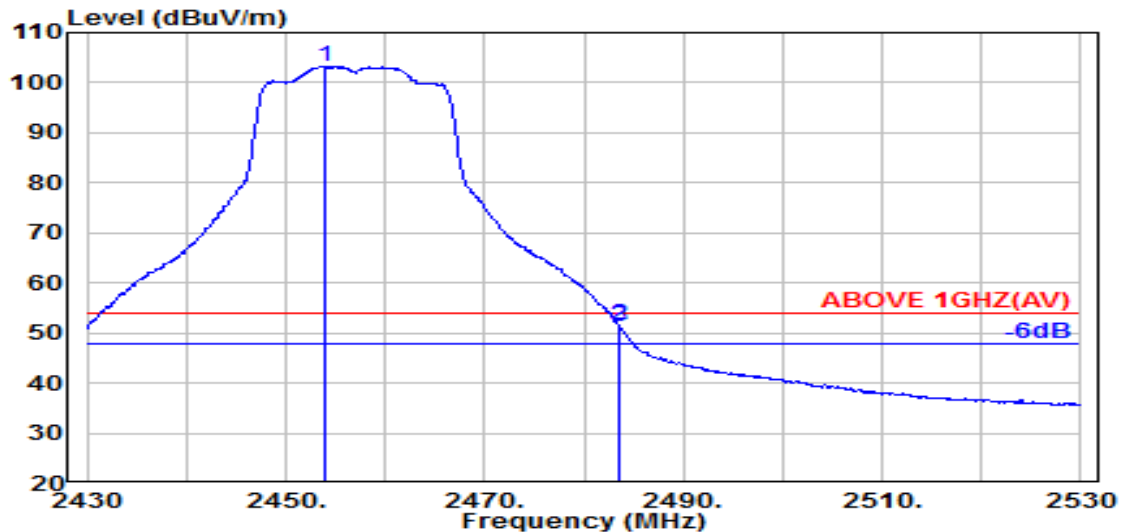


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	32.05	5.82	34.52	99.94	103.29	---	---	Average
2483.500	32.40	5.87	34.53	47.72	51.46	54.00	2.54	Average
2483.600	32.40	5.87	34.53	47.62	51.36	54.00	2.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

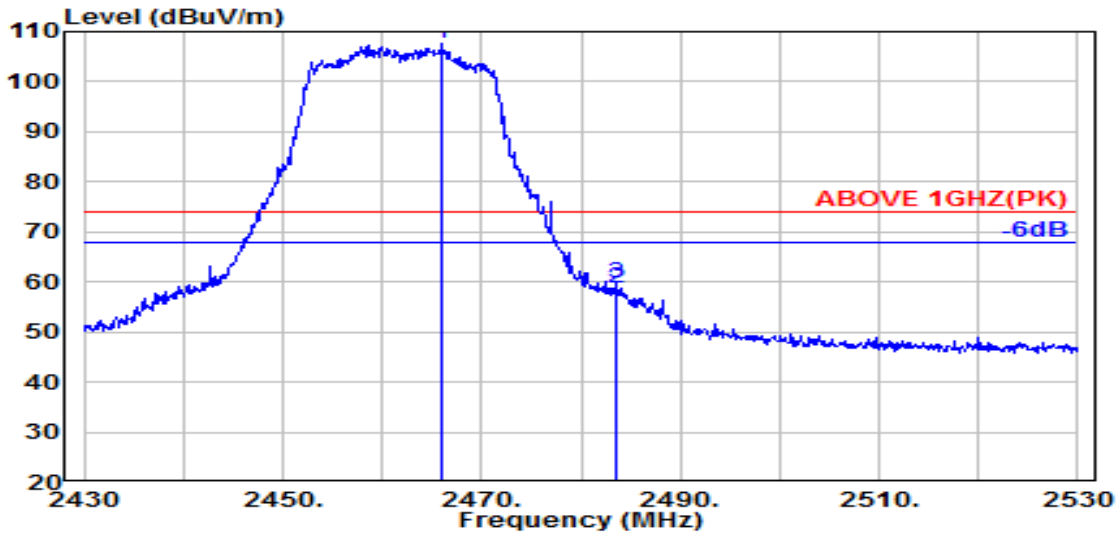

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	32.19	5.84	34.52	103.97	107.48	---	---	Peak
2483.500	32.40	5.87	34.53	55.13	58.87	74.00	15.13	Peak
2483.600	32.40	5.87	34.53	56.04	59.78	74.00	14.22	Peak

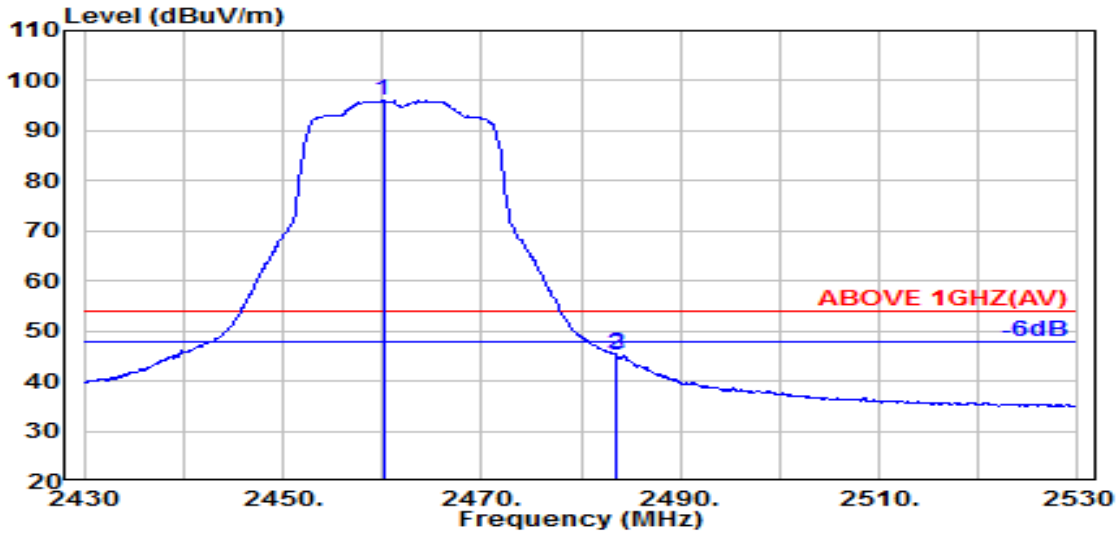


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	32.12	5.83	34.52	92.52	95.96	---	---	Average
2483.500	32.40	5.87	34.53	41.77	45.52	54.00	8.48	Average
2483.600	32.40	5.87	34.53	41.33	45.08	54.00	8.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

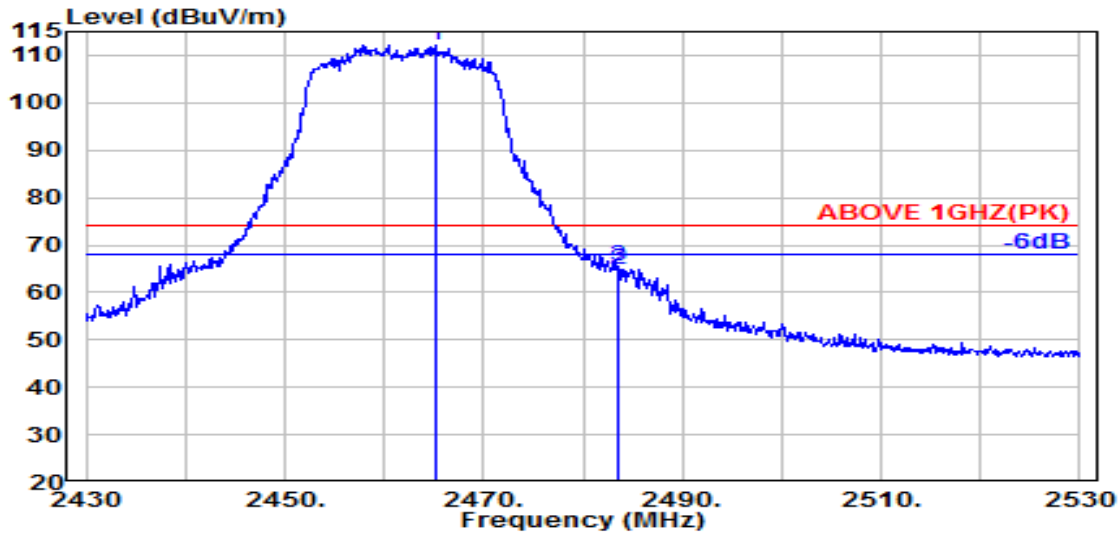

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	32.18	5.84	34.52	108.62	112.12	---	---	Peak
2483.500	32.40	5.87	34.53	60.90	64.64	74.00	9.36	Peak
2483.600	32.40	5.87	34.53	61.79	65.53	74.00	8.47	Peak

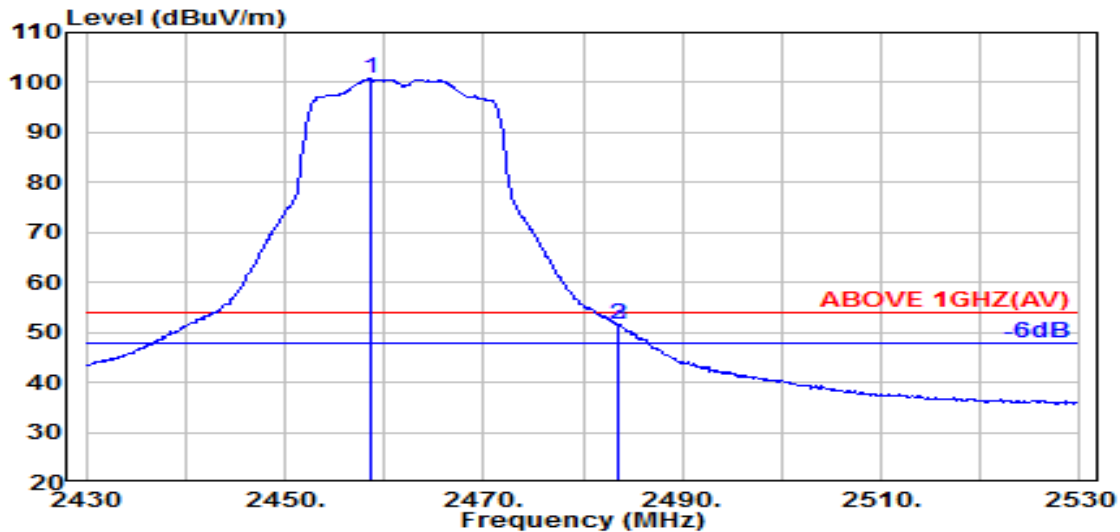


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.600	32.10	5.83	34.52	97.30	100.71	---	---	Average
2483.500	32.40	5.87	34.53	47.79	51.53	54.00	2.47	Average
2483.600	32.40	5.87	34.53	47.71	51.46	54.00	2.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

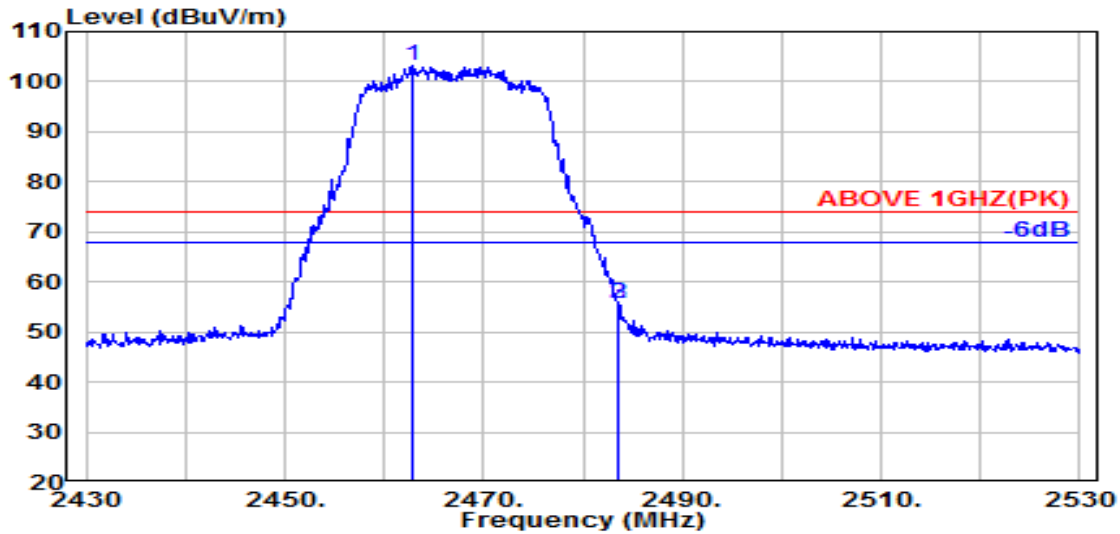

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	32.15	5.83	34.52	99.68	103.15	---	---	Peak
2483.500	32.40	5.87	34.53	52.08	55.82	74.00	18.18	Peak
2483.600	32.40	5.87	34.53	51.90	55.64	74.00	18.36	Peak

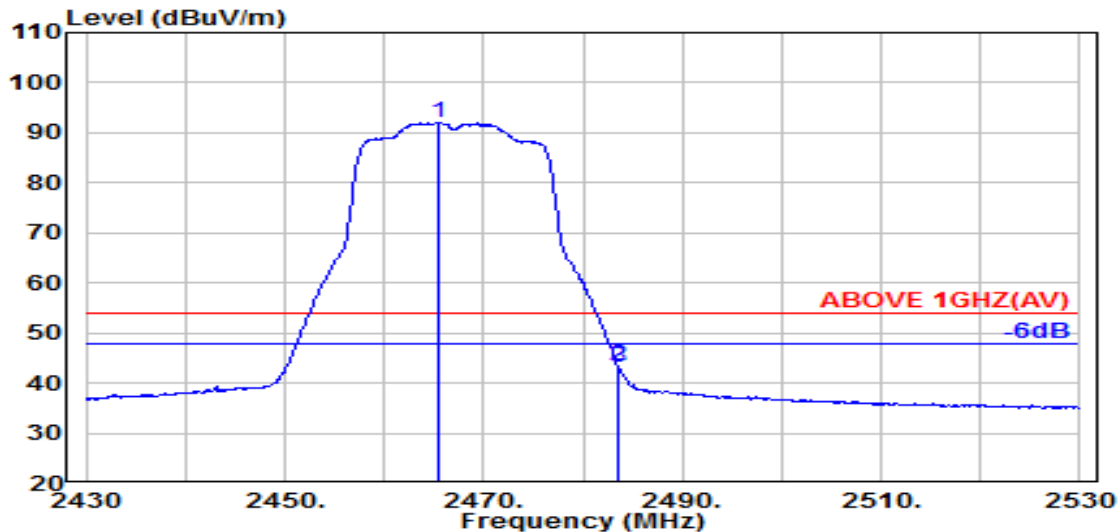


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	32.19	5.84	34.52	88.50	92.00	---	---	Average
2483.500	32.40	5.87	34.53	39.76	43.50	54.00	10.50	Average
2483.600	32.40	5.87	34.53	39.50	43.24	54.00	10.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

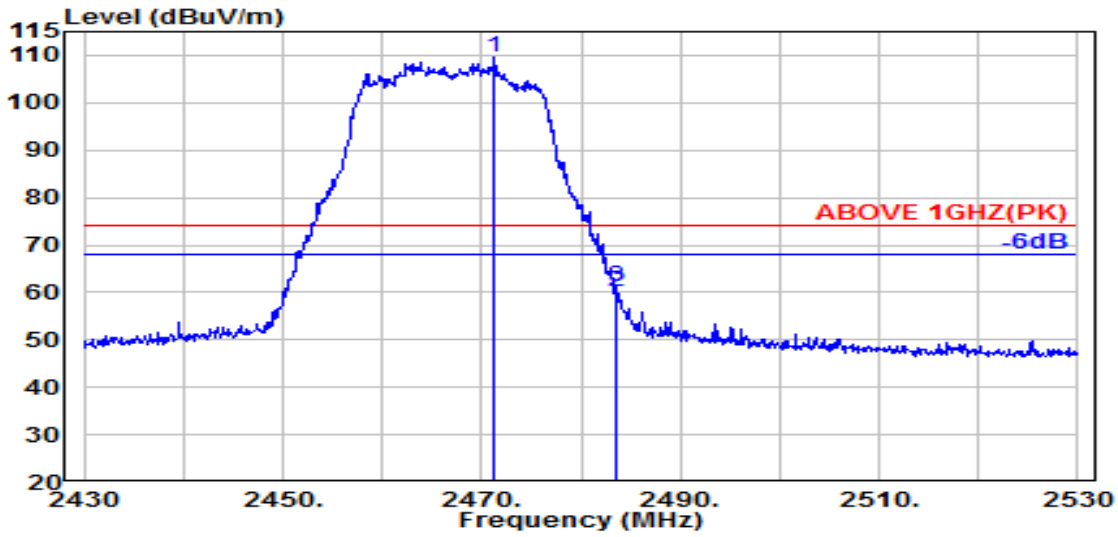

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	32.26	5.85	34.52	106.03	109.61	---	---	Peak
2483.500	32.40	5.87	34.53	56.45	60.19	74.00	13.81	Peak
2483.600	32.40	5.87	34.53	57.52	61.26	74.00	12.74	Peak

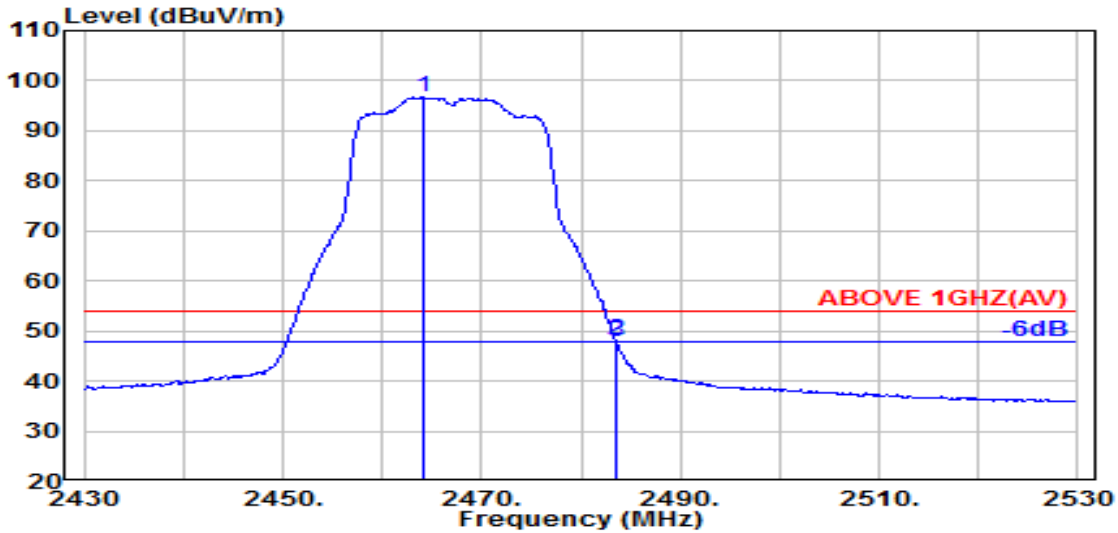


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	32.17	5.84	34.52	93.21	96.69	---	---	Average
2483.500	32.40	5.87	34.53	44.47	48.21	54.00	5.79	Average
2483.600	32.40	5.87	34.53	44.13	47.87	54.00	6.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

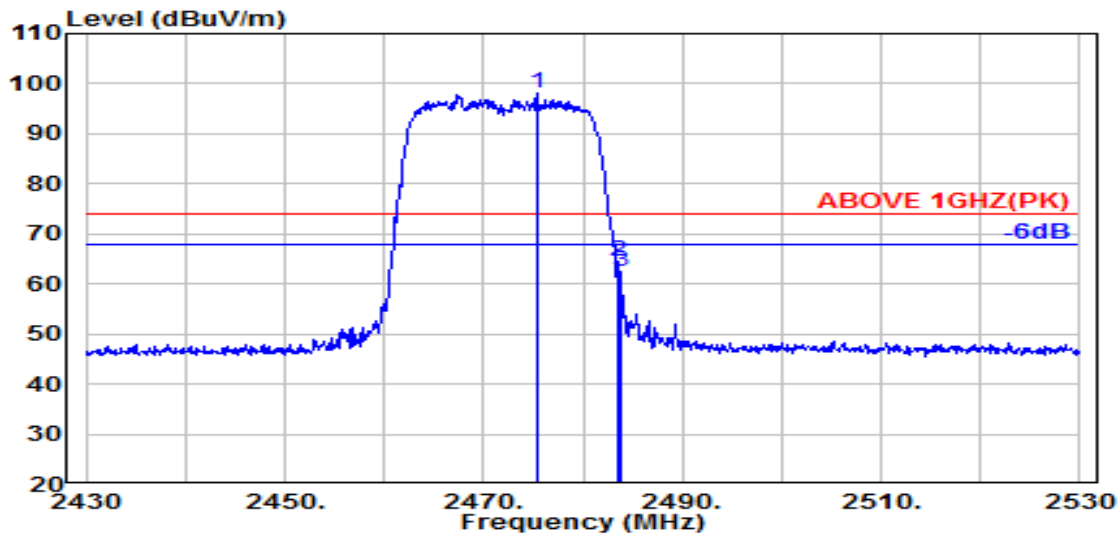

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.300	32.31	5.85	34.53	94.62	98.25	---	---	Peak
2483.500	32.40	5.87	34.53	60.70	64.44	74.00	9.56	Peak
2483.800	32.41	5.87	34.53	58.67	62.42	74.00	11.58	Peak

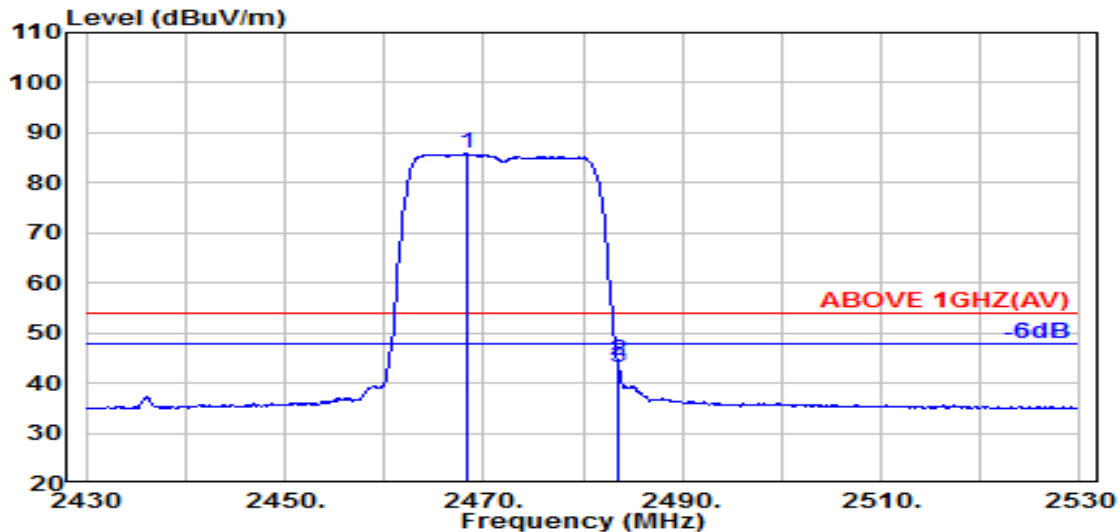


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	32.22	5.84	34.52	82.27	85.81	---	---	Average
2483.500	32.40	5.87	34.53	40.56	44.30	54.00	9.70	Average
2483.600	32.40	5.87	34.53	39.30	43.04	54.00	10.96	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

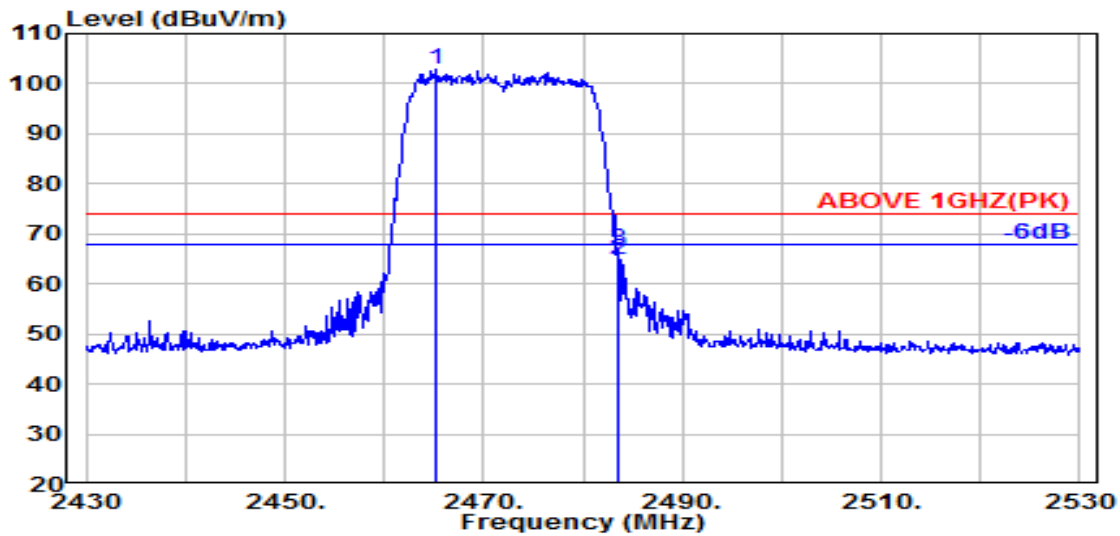

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	32.18	5.84	34.52	99.33	102.83	---	---	Peak
2483.500	32.40	5.87	34.53	60.96	64.71	74.00	9.29	Peak
2483.600	32.40	5.87	34.53	63.20	66.94	74.00	7.06	Peak

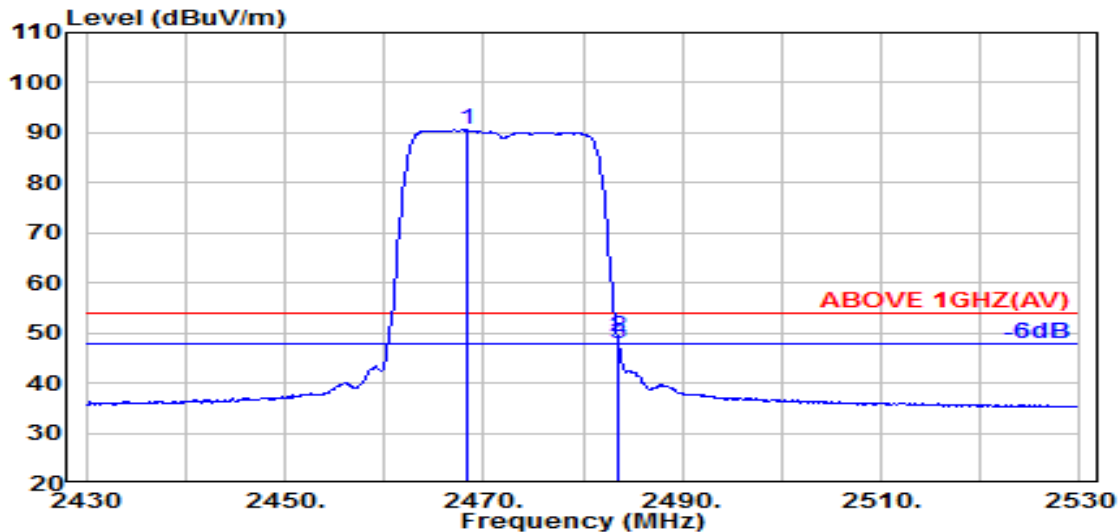


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	32.22	5.84	34.52	87.00	90.54	---	---	Average
2483.500	32.40	5.87	34.53	45.49	49.23	54.00	4.77	Average
2483.600	32.40	5.87	34.53	44.12	47.86	54.00	6.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

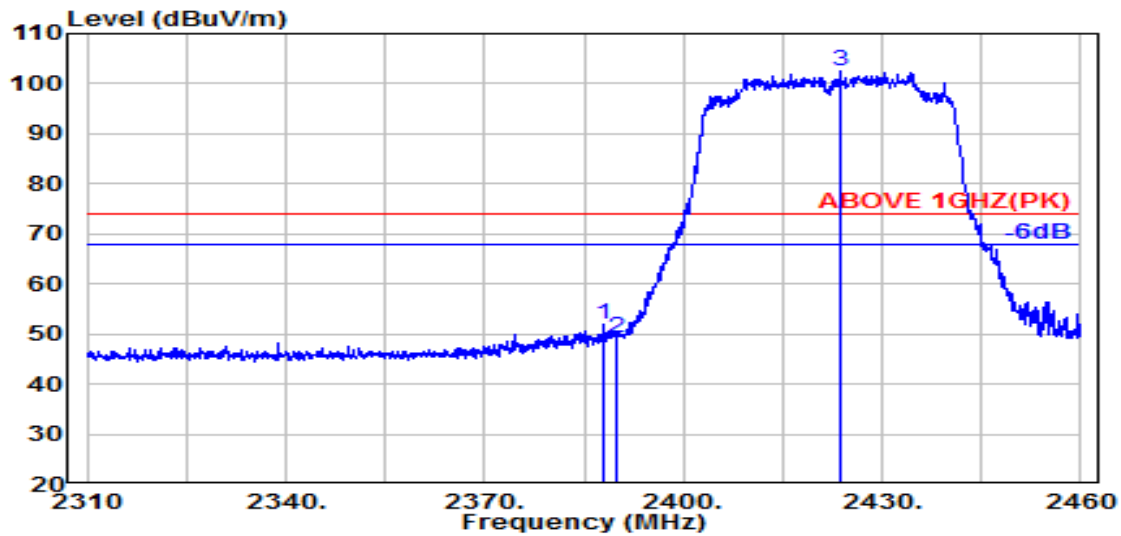

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	32.00	5.72	34.51	48.65	51.87	74.00	22.13	Peak
2390.000	32.00	5.72	34.51	46.10	49.32	74.00	24.68	Peak
@ 2423.700	32.00	5.77	34.51	99.39	102.65	---	---	Peak

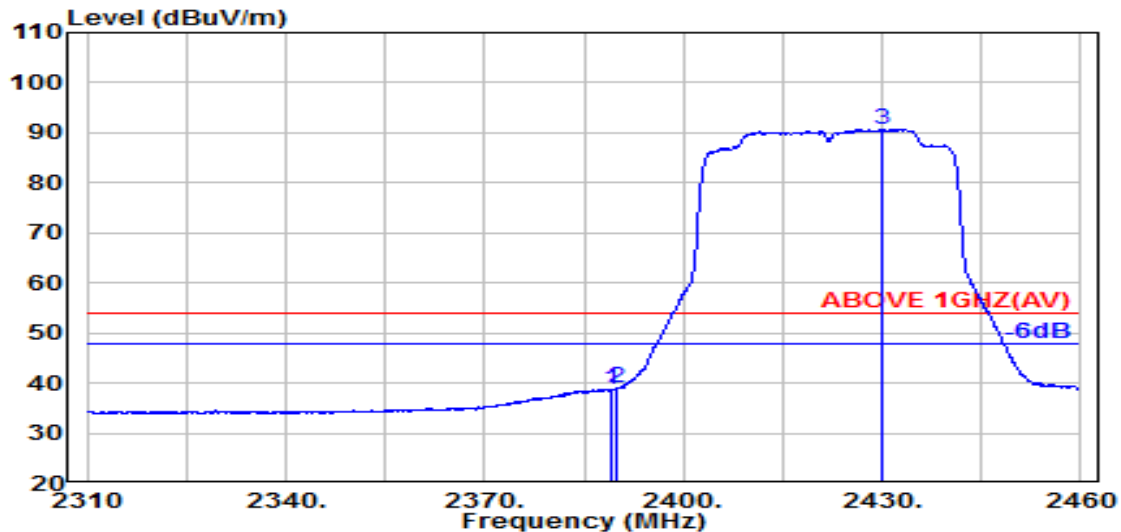


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	32.00	5.72	34.51	35.59	38.81	54.00	15.19	Average
2390.000	32.00	5.72	34.51	35.72	38.93	54.00	15.07	Average
@ 2430.100	32.00	5.78	34.52	87.52	90.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

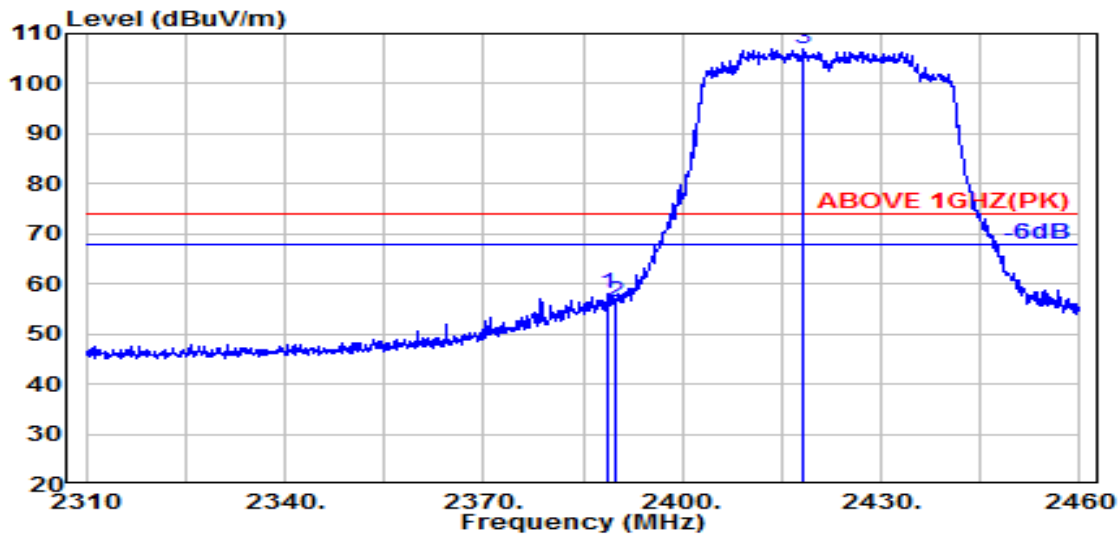

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	32.00	5.72	34.51	54.67	57.88	74.00	16.12	Peak
2390.000	32.00	5.72	34.51	53.22	56.43	74.00	17.57	Peak
@ 2418.300	32.00	5.77	34.51	103.68	106.93	---	---	Peak

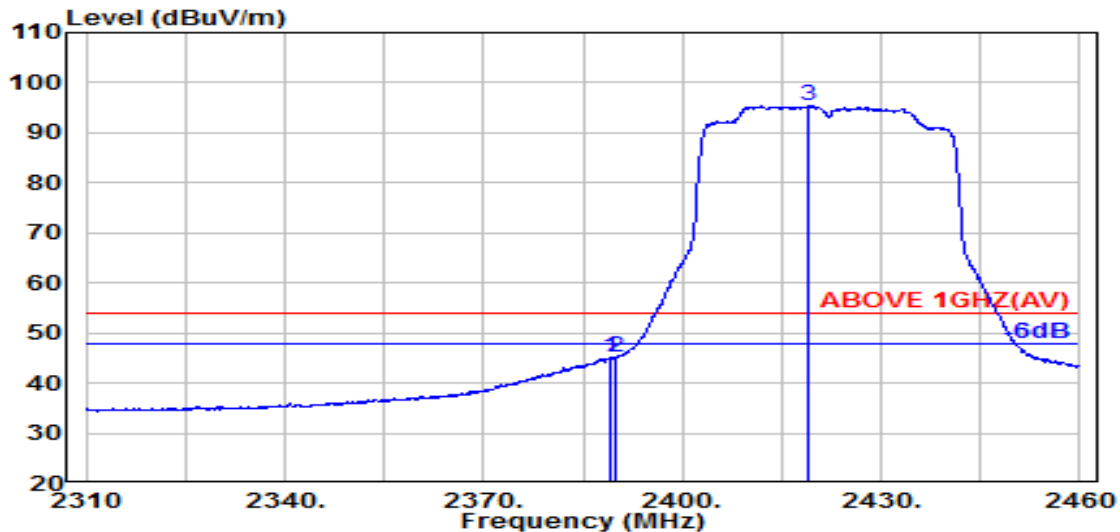


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	32.00	5.72	34.51	41.83	45.04	54.00	8.96	Average
2390.000	32.00	5.72	34.51	42.01	45.22	54.00	8.78	Average
@ 2419.100	32.00	5.77	34.51	92.15	95.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

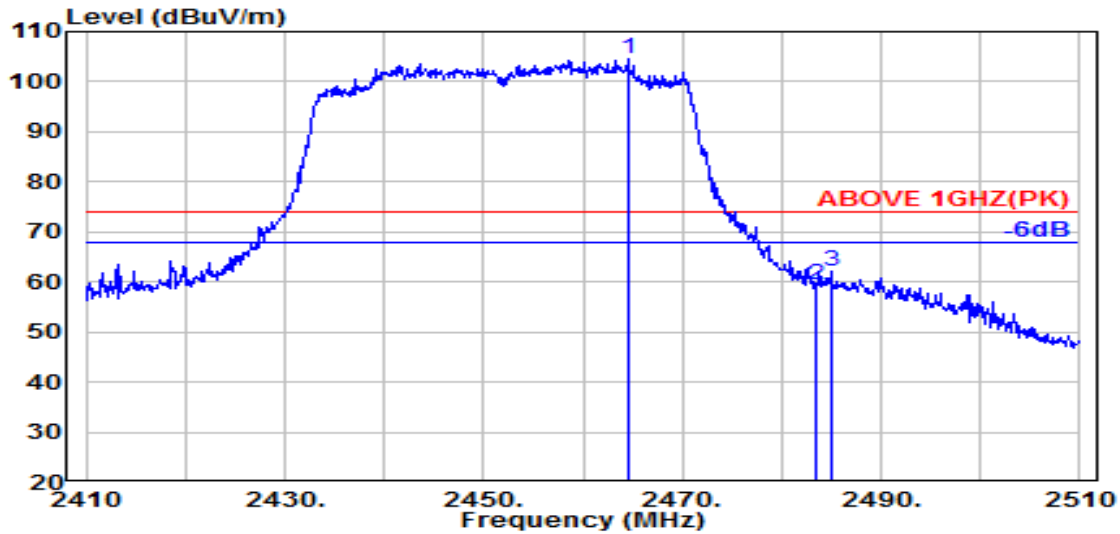

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.18	5.84	34.52	101.09	104.58	---	---	Peak
2483.500	32.40	5.87	34.53	55.82	59.56	74.00	14.44	Peak
2485.000	32.42	5.87	34.53	58.46	62.22	74.00	11.78	Peak

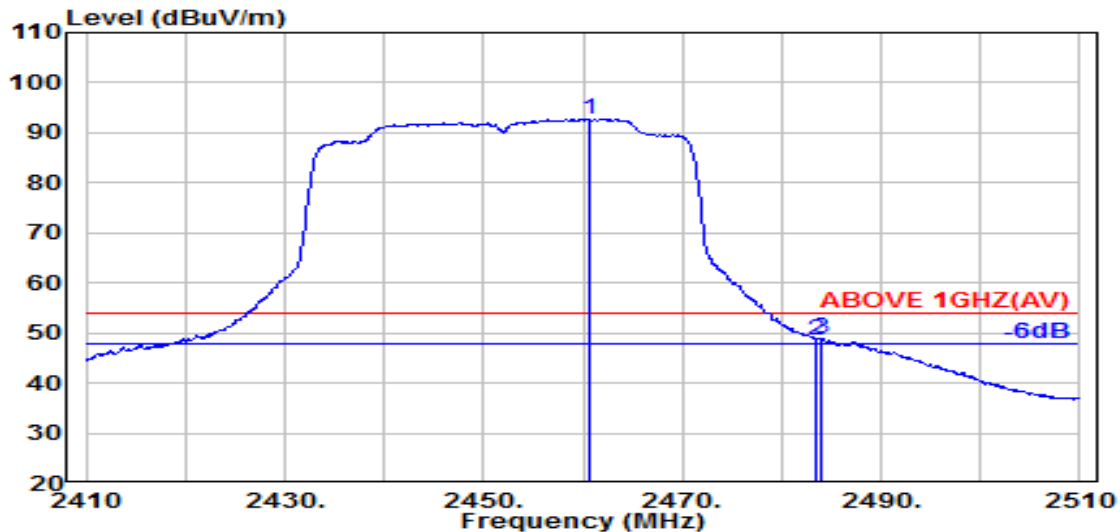


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.600	32.13	5.83	34.52	89.38	92.82	---	---	Average
2483.500	32.40	5.87	34.53	44.90	48.64	54.00	5.36	Average
2484.100	32.41	5.87	34.53	45.19	48.94	54.00	5.06	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

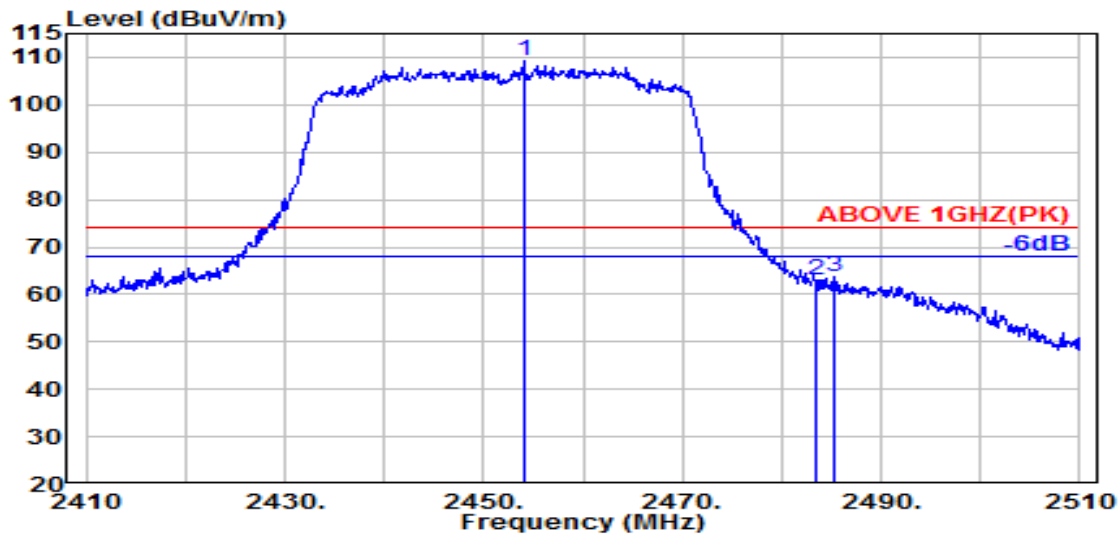

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	32.05	5.82	34.52	105.79	109.14	---	---	Peak
2483.500	32.40	5.87	34.53	59.13	62.87	74.00	11.13	Peak
2485.400	32.43	5.87	34.53	60.13	63.90	74.00	10.10	Peak

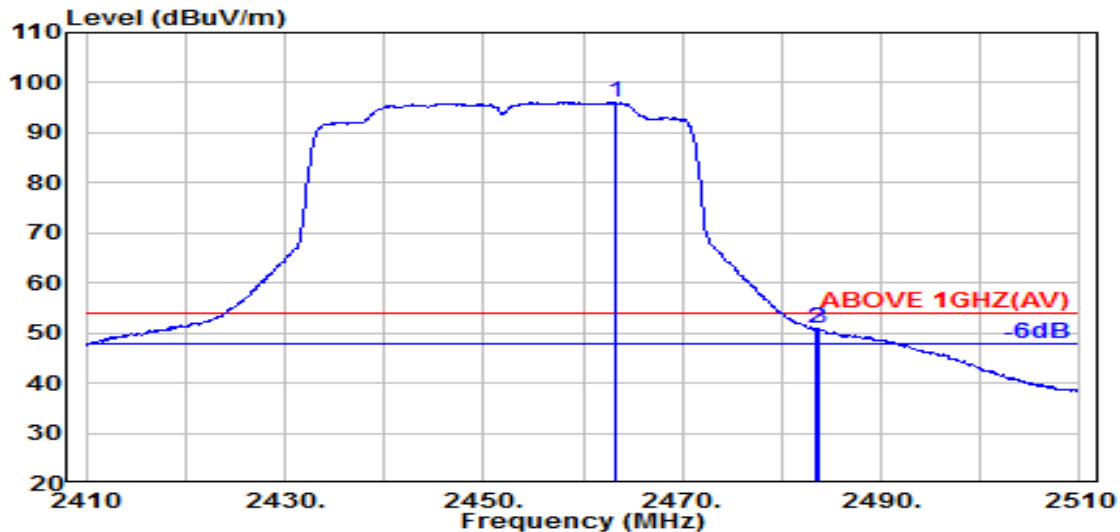


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	32.16	5.83	34.52	92.75	96.22	---	---	Average
2483.500	32.40	5.87	34.53	47.13	50.87	54.00	3.13	Average
2483.600	32.40	5.87	34.53	47.05	50.79	54.00	3.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

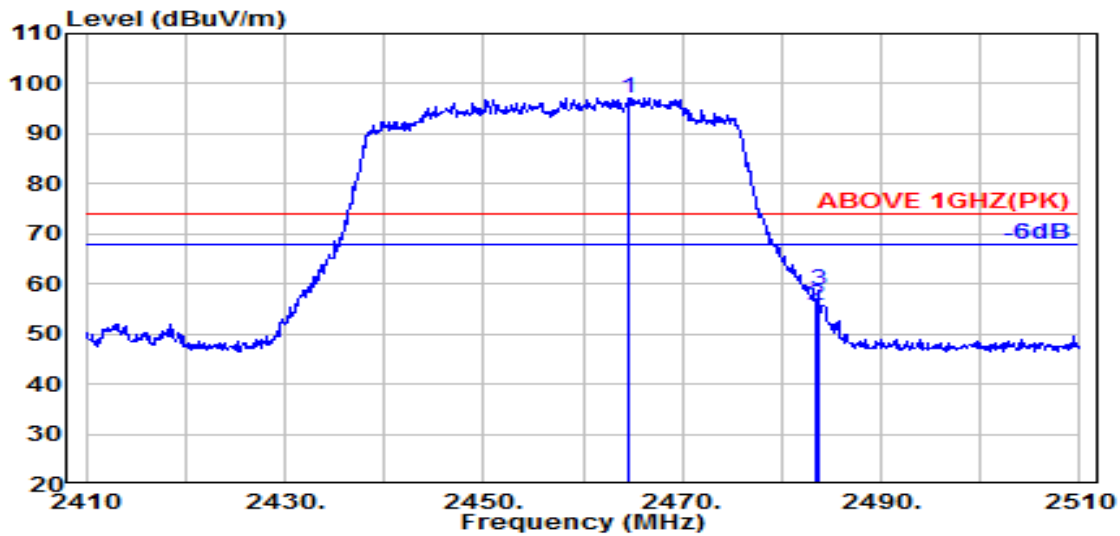

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	32.18	5.84	34.52	93.77	97.26	---	---	Peak
2483.500	32.40	5.87	34.53	51.79	55.53	74.00	18.47	Peak
2483.600	32.40	5.87	34.53	54.90	58.64	74.00	15.36	Peak

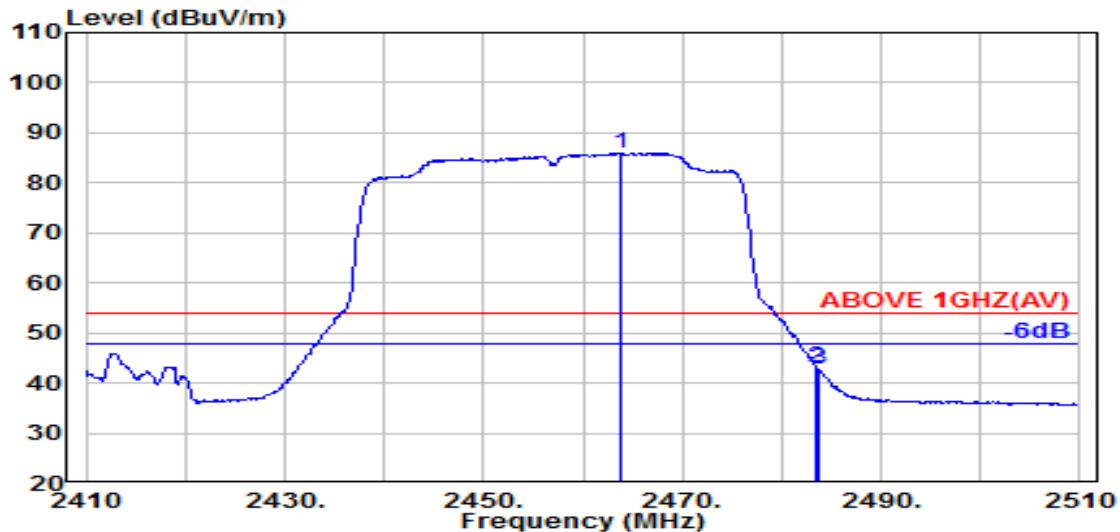


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	32.17	5.84	34.52	82.46	85.94	---	---	Average
2483.500	32.40	5.87	34.53	39.48	43.23	54.00	10.77	Average
2483.600	32.40	5.87	34.53	39.18	42.92	54.00	11.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

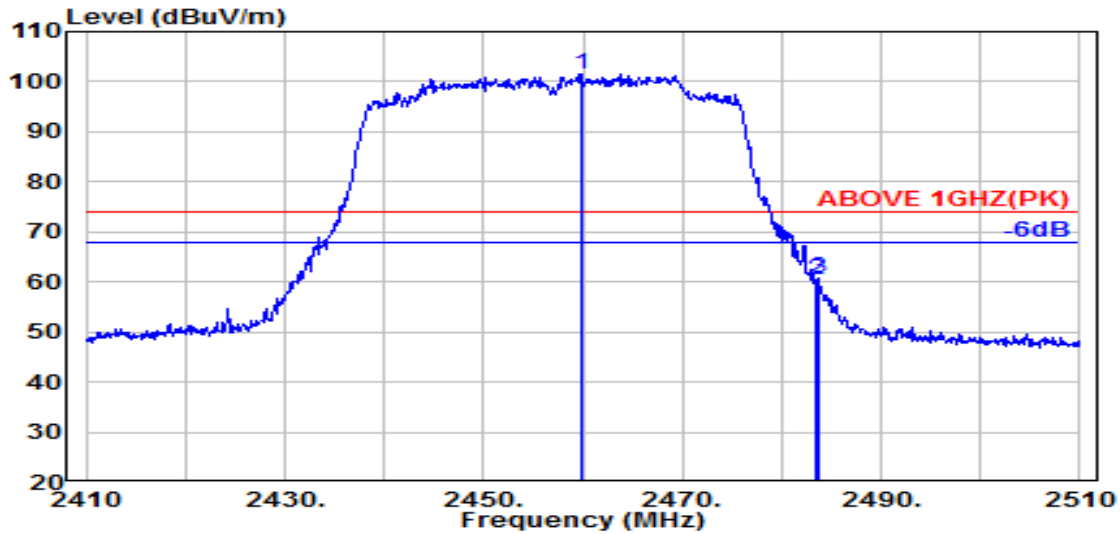

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	32.12	5.83	34.52	98.00	101.42	---	---	Peak
2483.500	32.40	5.87	34.53	56.68	60.42	74.00	13.58	Peak
2483.600	32.40	5.87	34.53	56.95	60.69	74.00	13.31	Peak

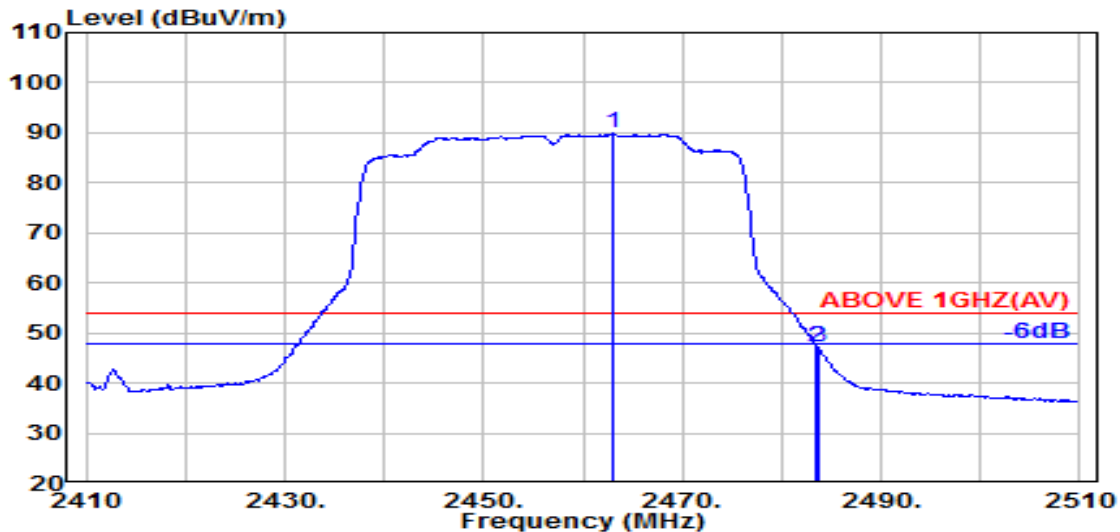


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.100	32.16	5.83	34.52	86.32	89.79	---	---	Average
2483.500	32.40	5.87	34.53	43.50	47.24	54.00	6.76	Average
2483.600	32.40	5.87	34.53	43.39	47.13	54.00	6.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

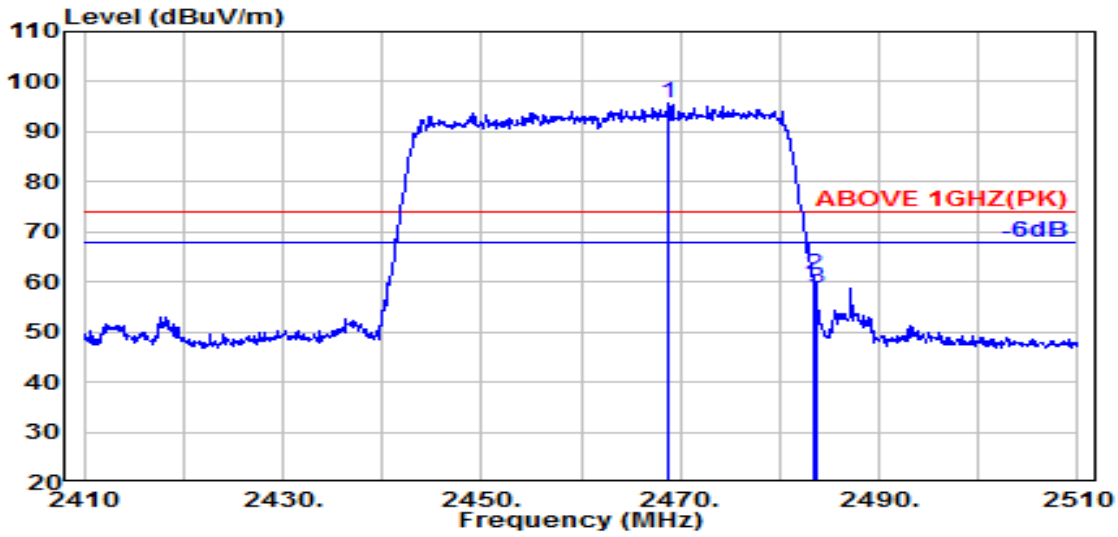

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.800	32.23	5.84	34.52	92.32	95.87	---	---	Peak
2483.500	32.40	5.87	34.53	57.82	61.57	74.00	12.43	Peak
2483.600	32.40	5.87	34.53	55.06	58.80	74.00	15.20	Peak

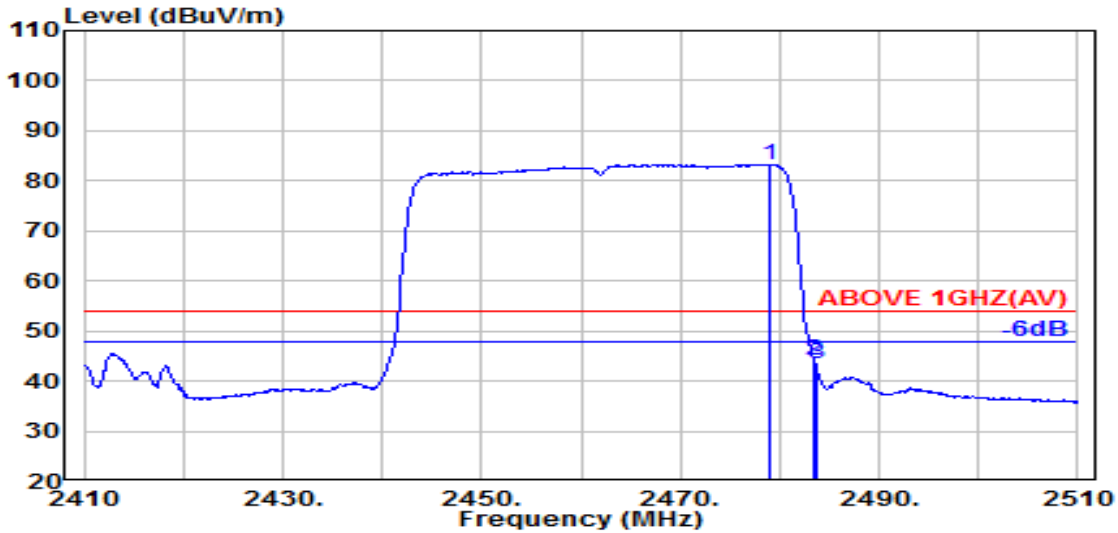


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.35	5.86	34.53	79.64	83.32	---	---	Average
2483.500	32.40	5.87	34.53	40.31	44.05	54.00	9.95	Average
2483.600	32.40	5.87	34.53	39.75	43.49	54.00	10.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

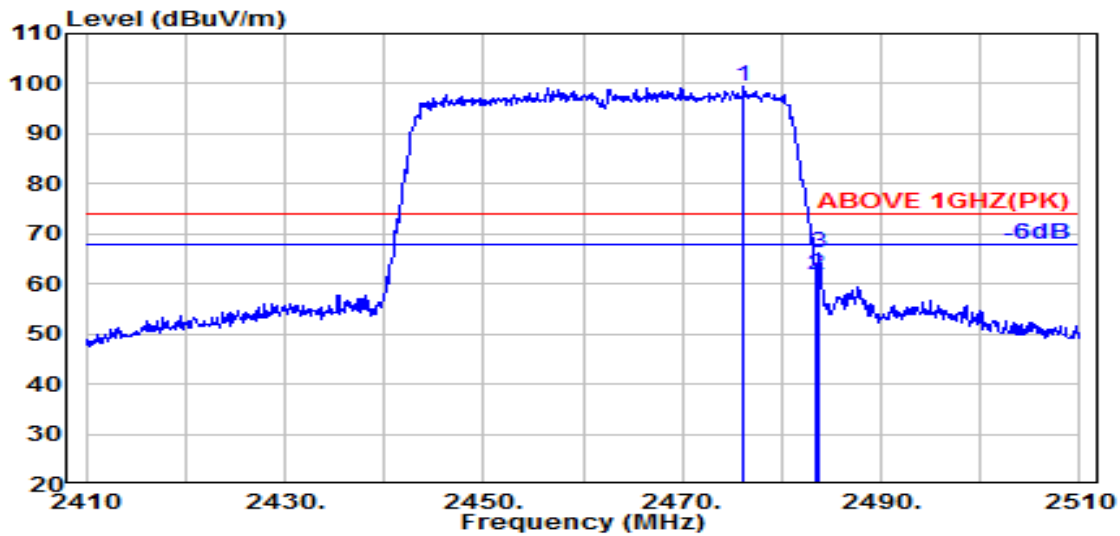

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.100	32.31	5.85	34.53	95.82	99.46	---	---	Peak
2483.500	32.40	5.87	34.53	57.95	61.69	74.00	12.31	Peak
2483.600	32.40	5.87	34.53	62.54	66.29	74.00	7.71	Peak

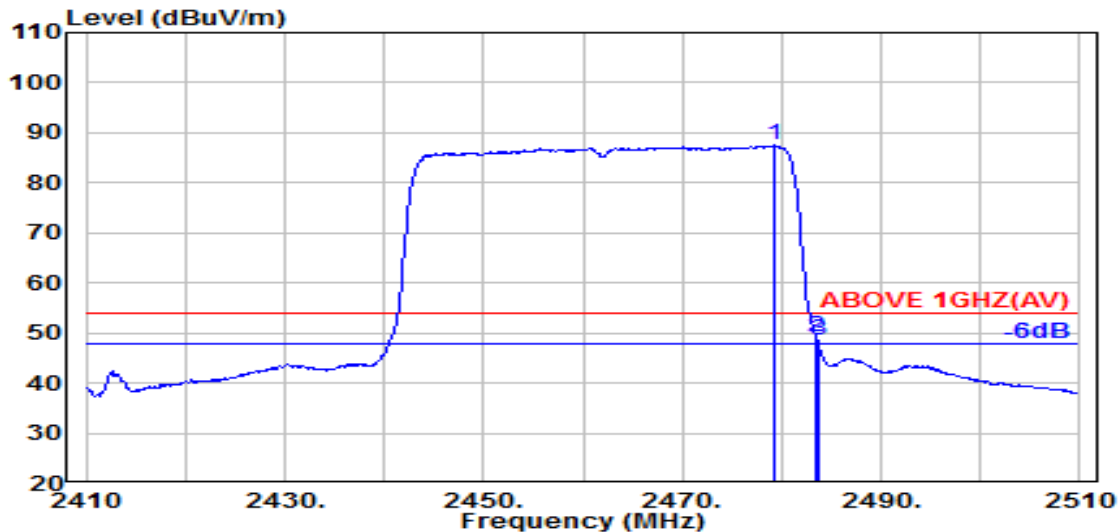


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	32.35	5.86	34.53	83.75	87.43	---	---	Average
2483.500	32.40	5.87	34.53	45.36	49.10	54.00	4.90	Average
2483.600	32.40	5.87	34.53	44.85	48.59	54.00	5.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

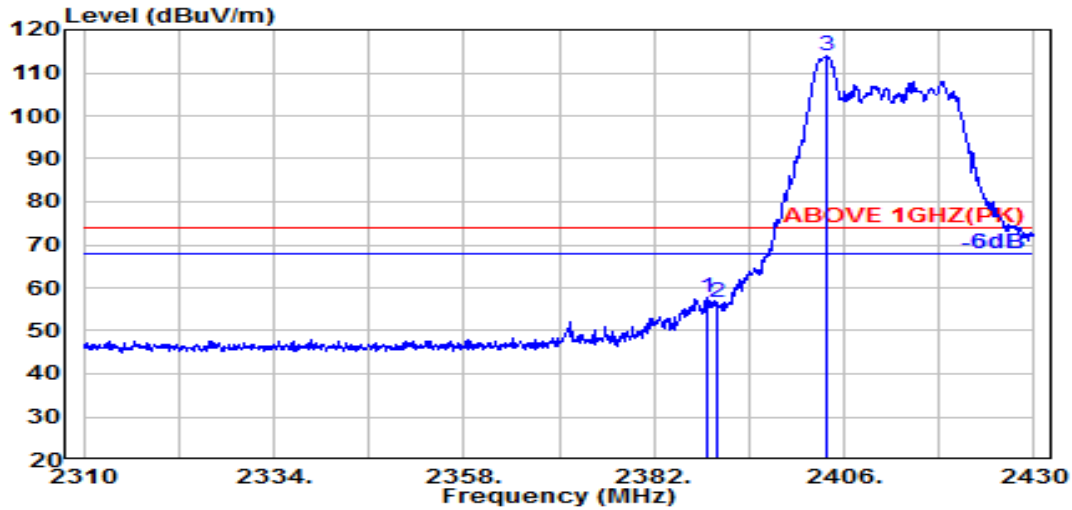

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	32.00	5.72	34.51	54.35	57.57	74.00	16.43	Peak
2390.000	32.00	5.72	34.51	53.48	56.69	74.00	17.31	Peak
@ 2403.900	32.00	5.74	34.51	110.54	113.78	---	---	Peak

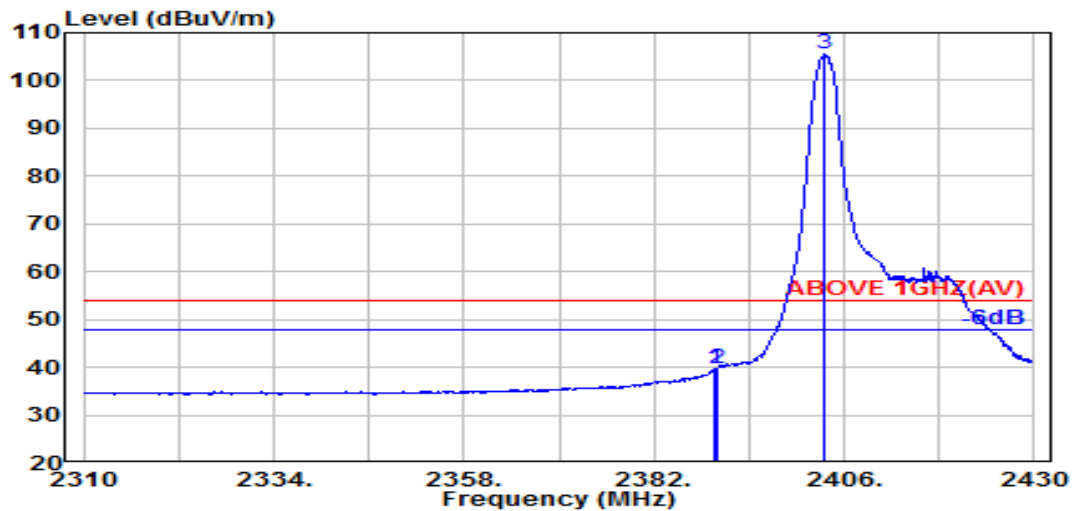


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	32.00	5.72	34.51	36.51	39.72	54.00	14.28	Average
2390.000	32.00	5.72	34.51	36.53	39.75	54.00	14.25	Average
@ 2403.500	32.00	5.74	34.51	102.21	105.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

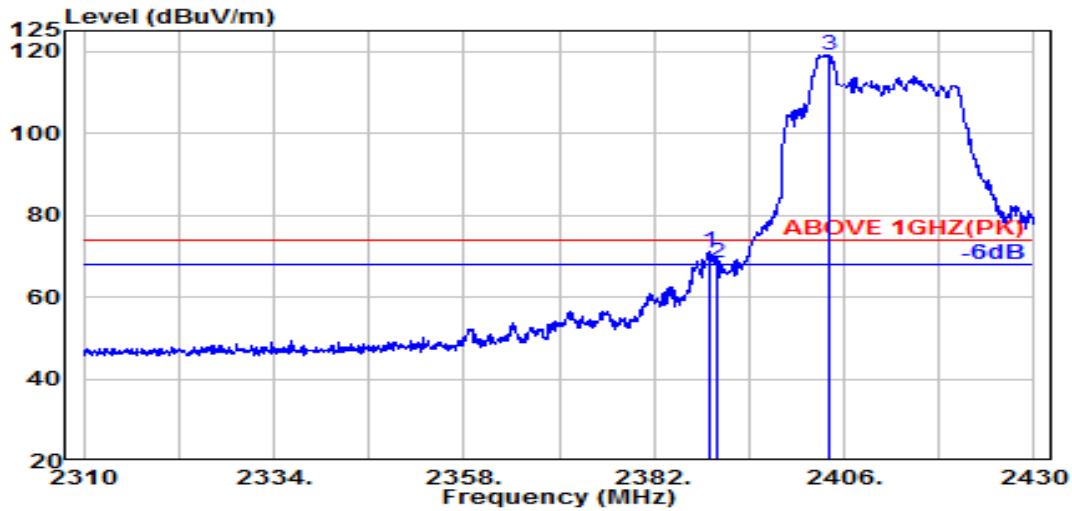

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	32.00	5.72	34.51	68.00	71.22	74.00	2.78	Peak
2390.000	32.00	5.72	34.51	64.99	68.21	74.00	5.79	Peak
@ 2404.000	32.00	5.74	34.51	115.67	118.90	---	---	Peak

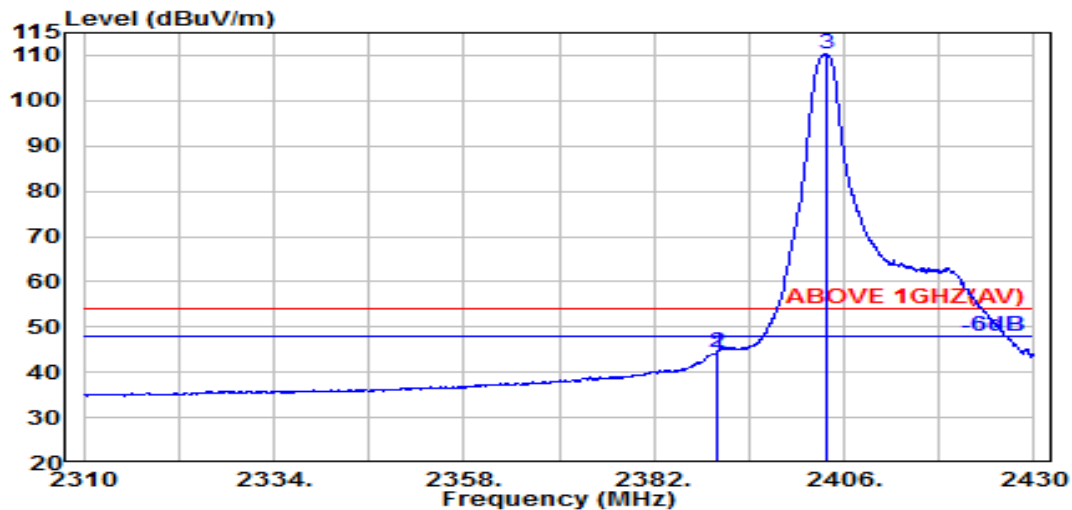


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	40.98	44.20	54.00	9.80	Average
2390.000	32.00	5.72	34.51	41.30	44.51	54.00	9.49	Average
@ 2403.800	32.00	5.74	34.51	107.13	110.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

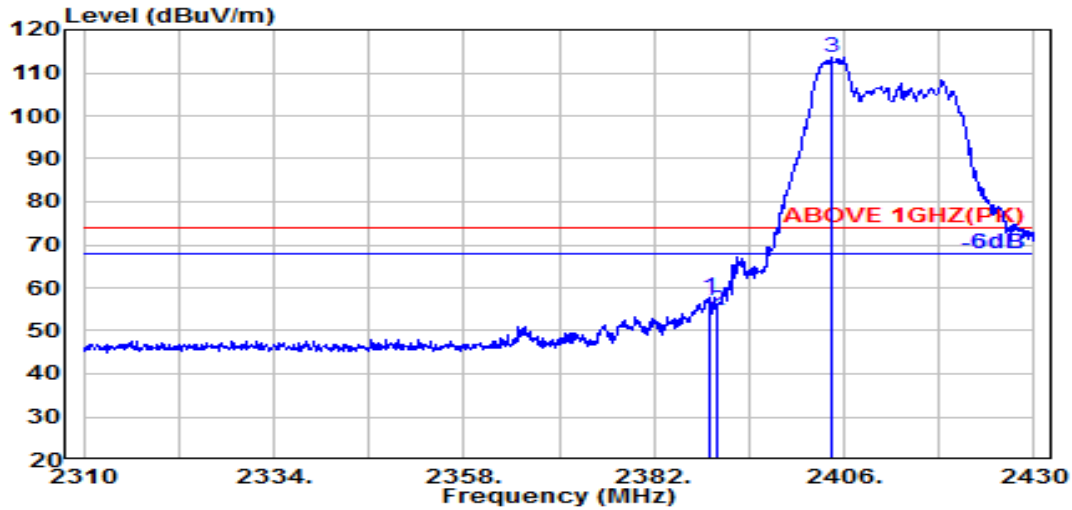

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	32.00	5.72	34.51	54.50	57.72	74.00	16.28	Peak
2390.000	32.00	5.72	34.51	51.59	54.81	74.00	19.19	Peak
@ 2404.400	32.00	5.74	34.51	110.52	113.76	---	---	Peak

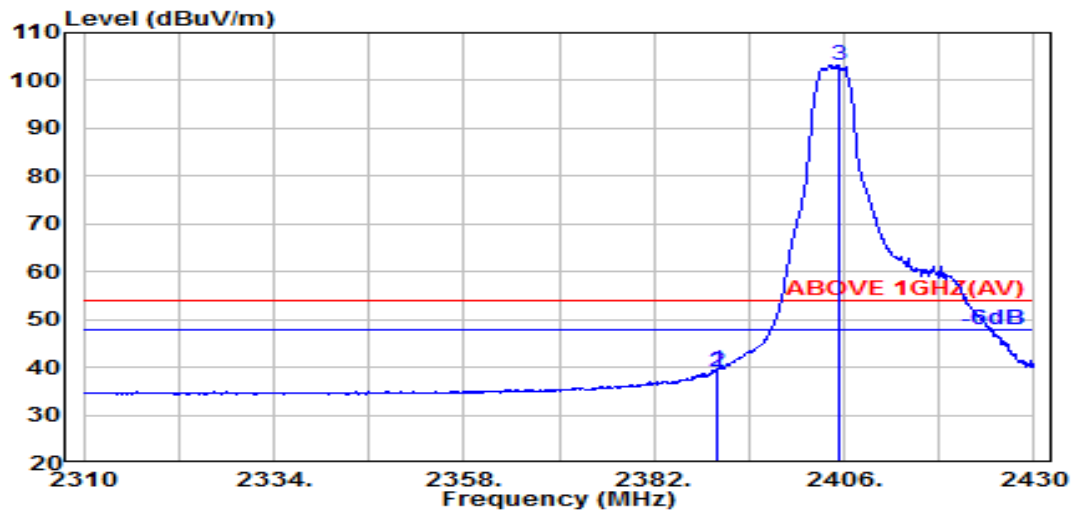


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	36.25	39.47	54.00	14.53	Average
2390.000	32.00	5.72	34.51	35.93	39.15	54.00	14.85	Average
@ 2405.300	32.00	5.75	34.51	100.06	103.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

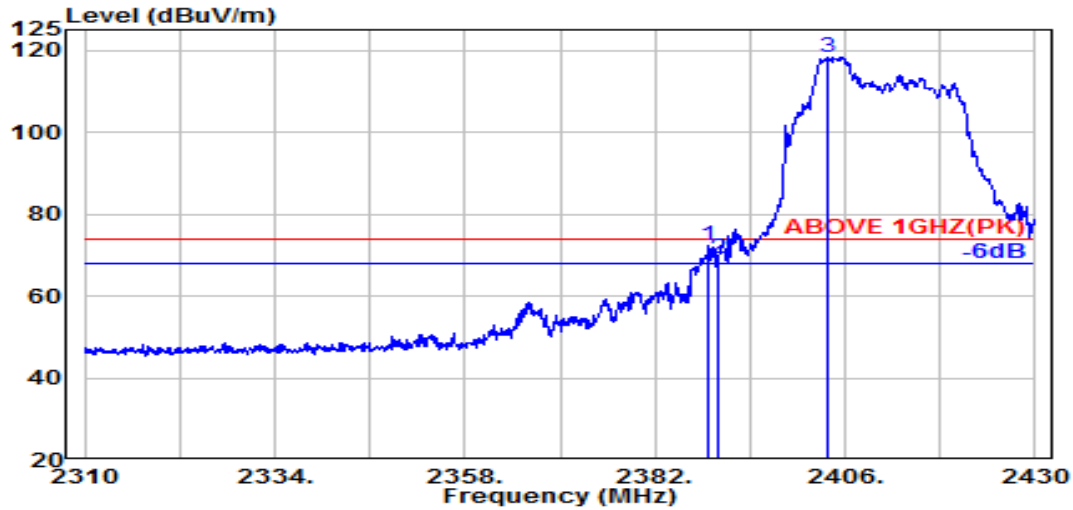

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	32.00	5.72	34.51	69.01	72.22	74.00	1.78	Peak
2390.000	32.00	5.72	34.51	65.80	69.01	74.00	4.99	Peak
@ 2403.900	32.00	5.74	34.51	115.14	118.38	---	---	Peak

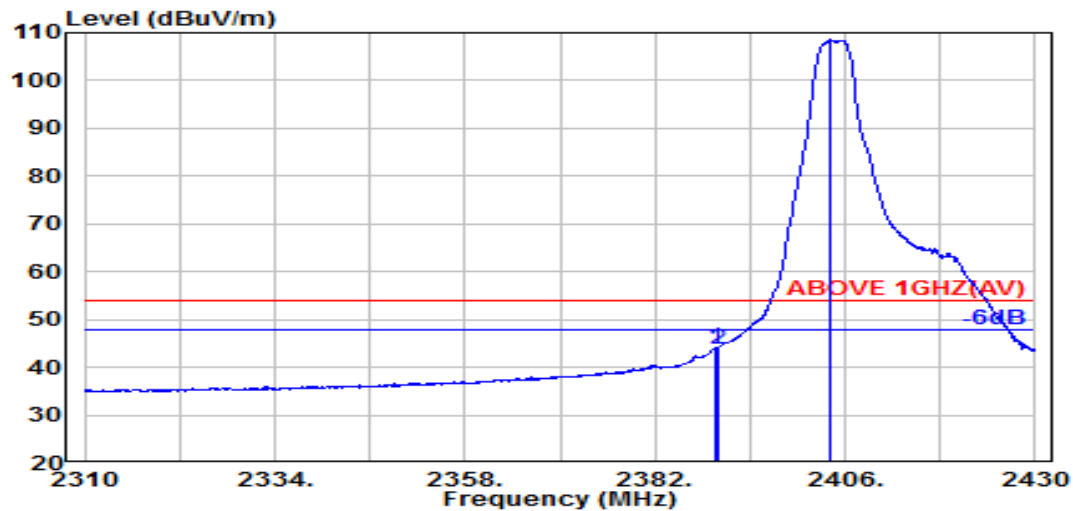


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	32.00	5.72	34.51	40.80	44.01	54.00	9.99	Average
2390.000	32.00	5.72	34.51	40.50	43.71	54.00	10.29	Average
@ 2404.200	32.00	5.74	34.51	105.24	108.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

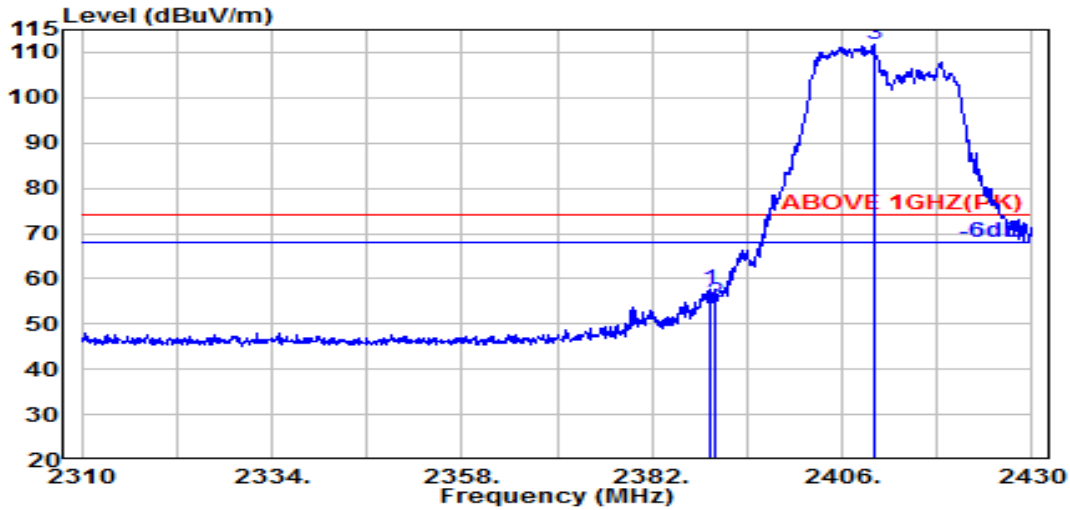

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	32.00	5.72	34.51	54.55	57.77	74.00	16.23	Peak
2390.000	32.00	5.72	34.51	51.66	54.87	74.00	19.13	Peak
@ 2410.000	32.00	5.75	34.51	108.69	111.93	---	---	Peak

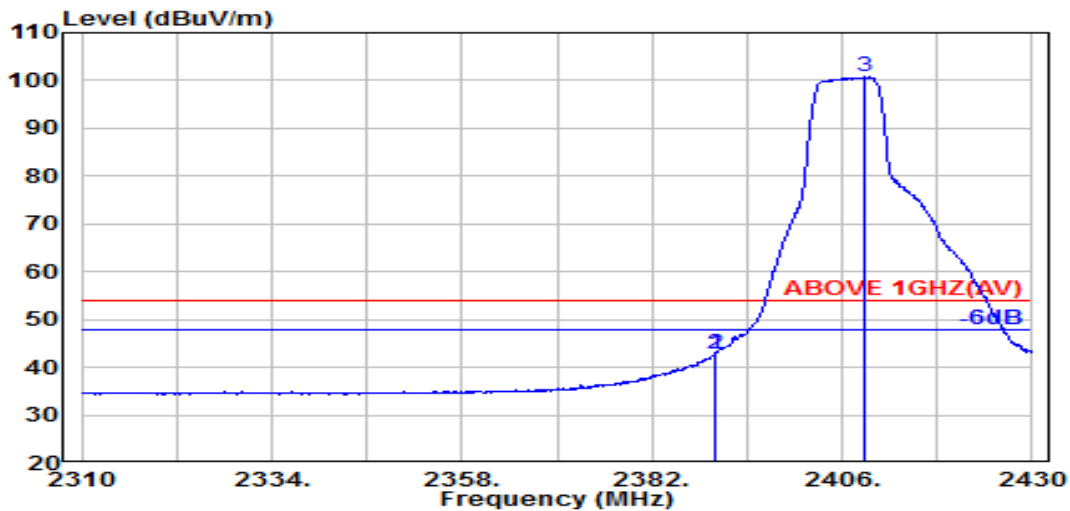


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	39.45	42.66	54.00	11.34	Average
2390.000	32.00	5.72	34.51	39.59	42.81	54.00	11.19	Average
@ 2408.800	32.00	5.75	34.51	97.63	100.87	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

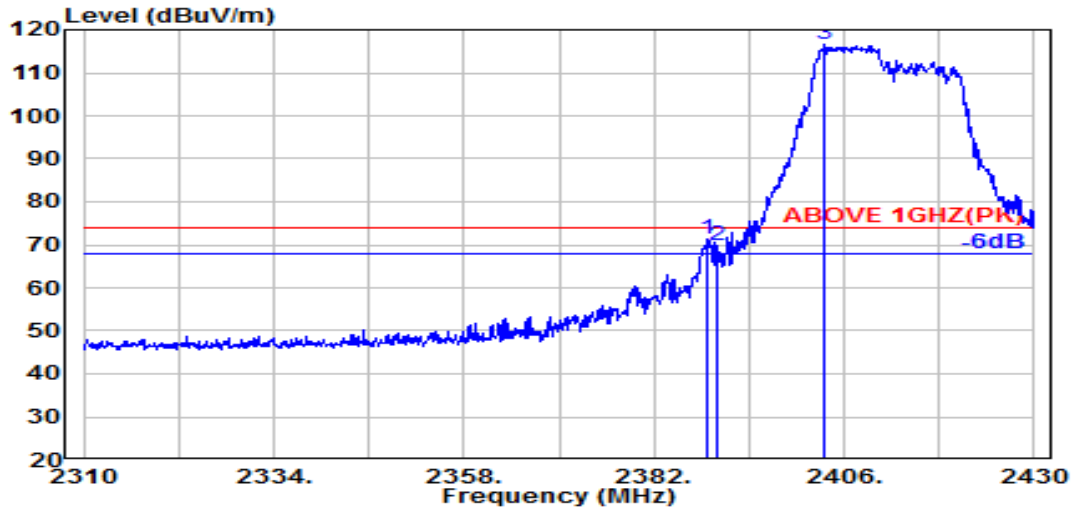

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	32.00	5.72	34.51	67.97	71.18	74.00	2.82	Peak
2390.000	32.00	5.72	34.51	66.45	69.67	74.00	4.33	Peak
@ 2403.600	32.00	5.74	34.51	113.30	116.53	---	---	Peak

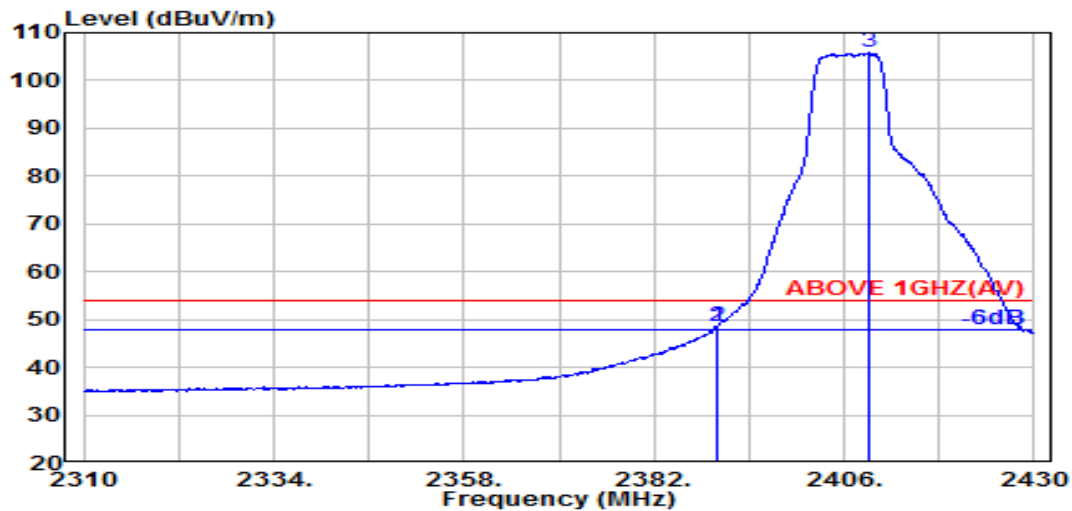


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	45.34	48.55	54.00	5.45	Average
2390.000	32.00	5.72	34.51	45.37	48.58	54.00	5.42	Average
@ 2409.200	32.00	5.75	34.51	102.55	105.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

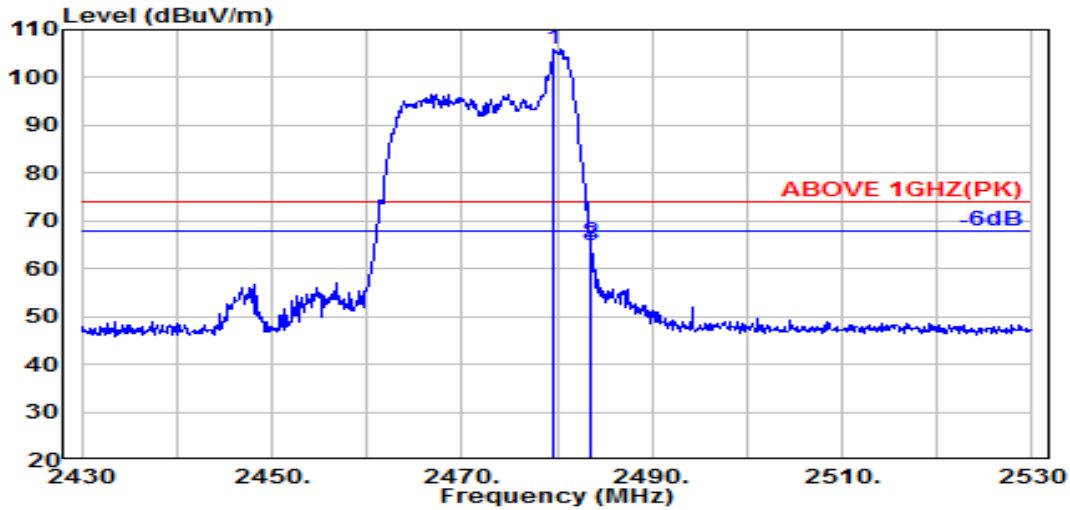

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.700	32.36	5.86	34.53	102.39	106.08	---	---	Peak
	2483.500	32.40	5.87	34.53	61.90	65.64	74.00	8.36	Peak
	2483.600	32.40	5.87	34.53	61.08	64.83	74.00	9.17	Peak

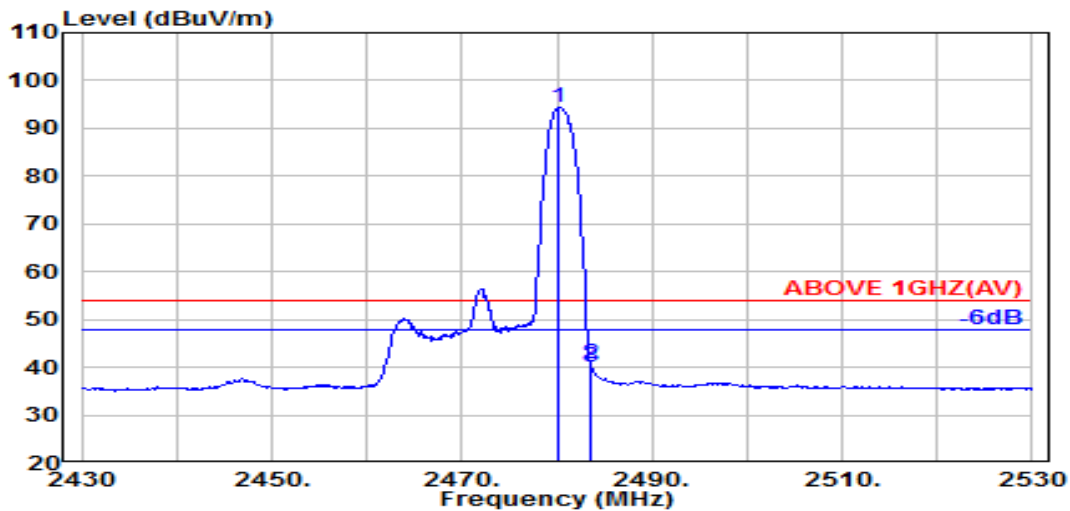


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.200	32.36	5.86	34.53	90.69	94.38	---	---	Average
	2483.500	32.40	5.87	34.53	37.12	40.86	54.00	13.14	Average
	2483.600	32.40	5.87	34.53	36.42	40.16	54.00	13.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

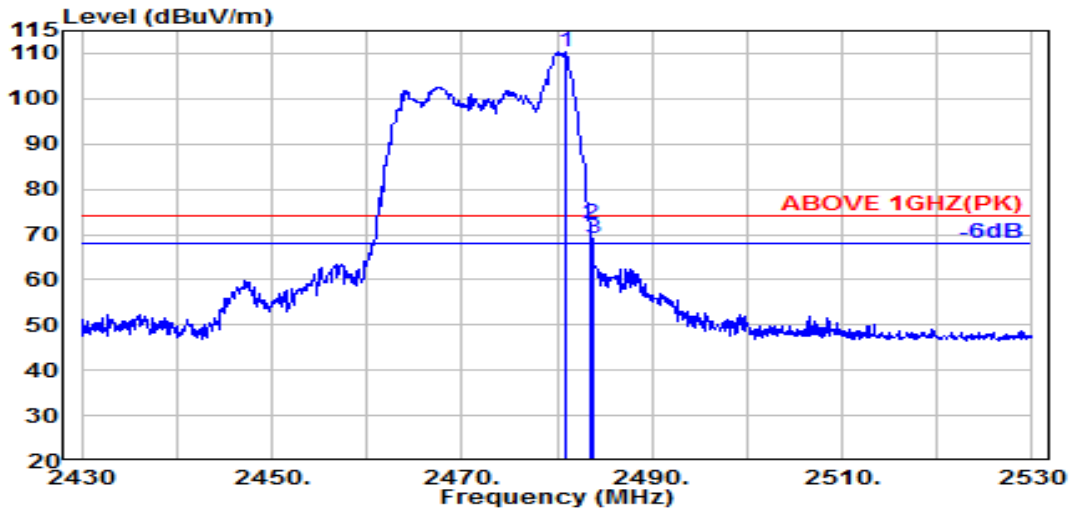

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.800	32.37	5.86	34.53	106.74	110.44	---	---	Peak
2483.500	32.40	5.87	34.53	68.69	72.43	74.00	1.57	Peak
2483.700	32.41	5.87	34.53	65.22	68.97	74.00	5.03	Peak

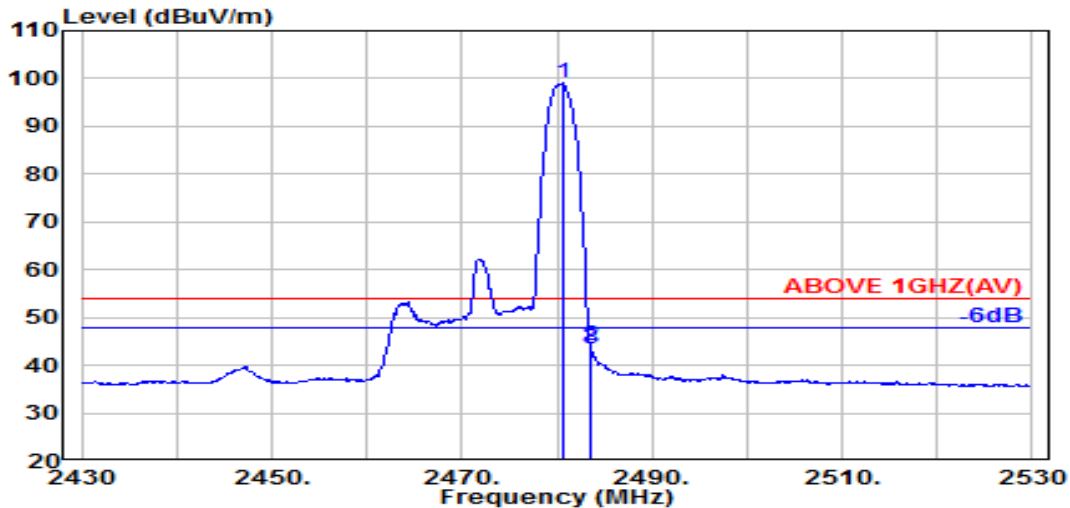


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.600	32.37	5.86	34.53	95.37	99.07	---	---	Average
2483.500	32.40	5.87	34.53	40.48	44.22	54.00	9.78	Average
2483.600	32.40	5.87	34.53	39.67	43.42	54.00	10.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

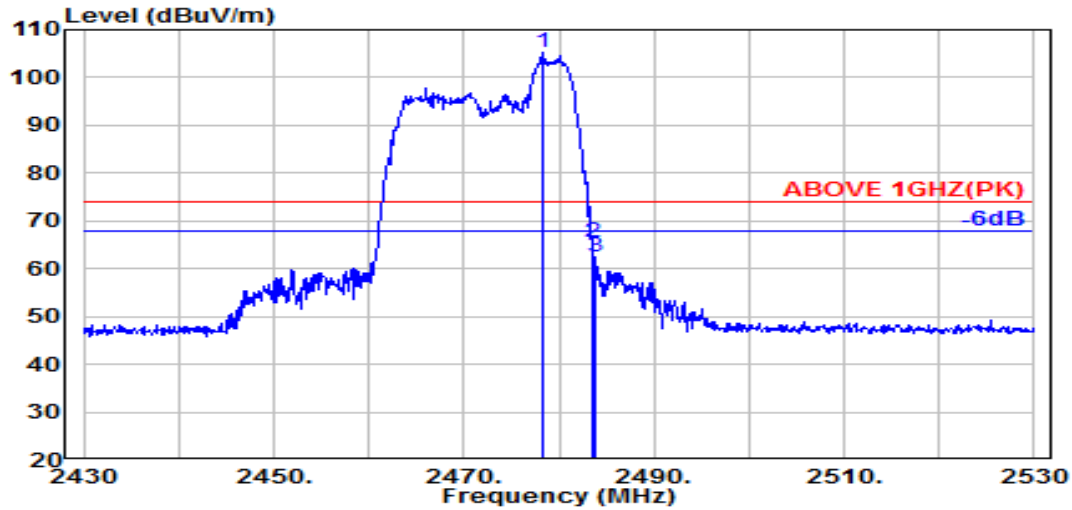

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.200	32.34	5.86	34.53	101.56	105.24	---	---	Peak
2483.500	32.40	5.87	34.53	61.70	65.44	74.00	8.56	Peak
2483.800	32.41	5.87	34.53	58.54	62.29	74.00	11.71	Peak

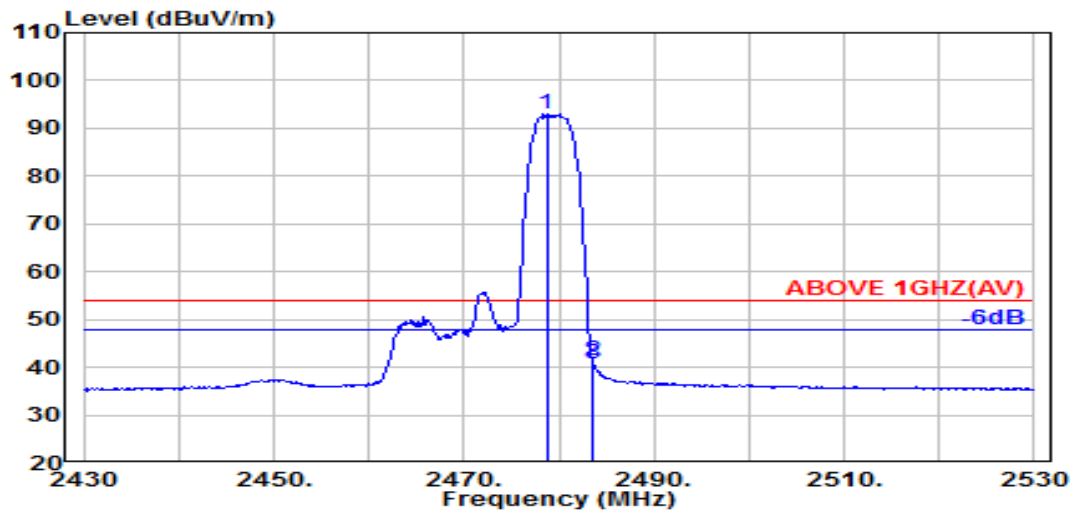


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	32.35	5.86	34.53	89.32	93.00	---	---	Average
2483.500	32.40	5.87	34.53	37.52	41.26	54.00	12.74	Average
2483.600	32.40	5.87	34.53	36.91	40.65	54.00	13.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

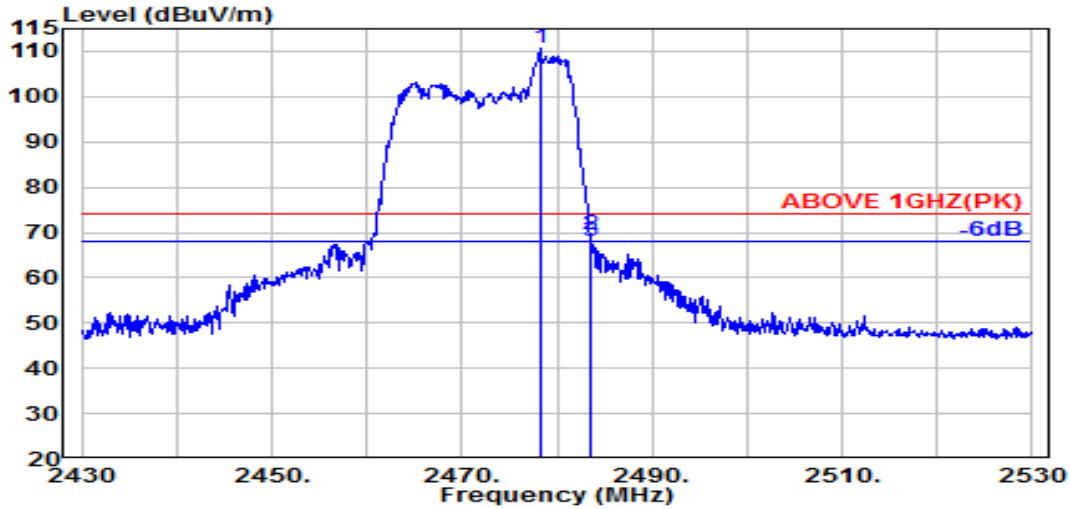

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.200	32.34	5.86	34.53	106.94	110.61	---	---	Peak
2483.500	32.40	5.87	34.53	65.76	69.50	74.00	4.50	Peak
2483.600	32.40	5.87	34.53	64.24	67.98	74.00	6.02	Peak

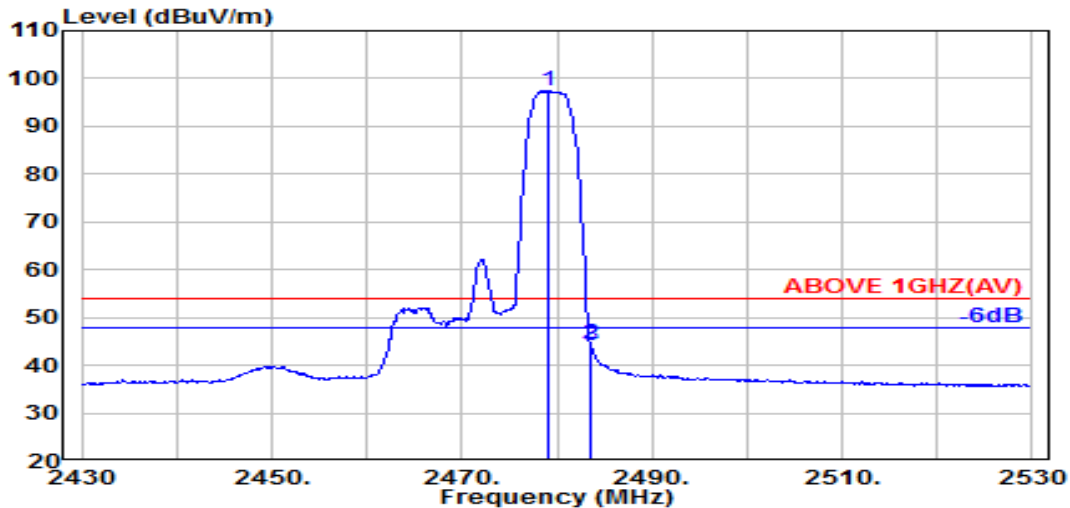


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	32.35	5.86	34.53	93.83	97.51	---	---	Average
2483.500	32.40	5.87	34.53	40.67	44.41	54.00	9.59	Average
2483.600	32.40	5.87	34.53	40.20	43.94	54.00	10.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

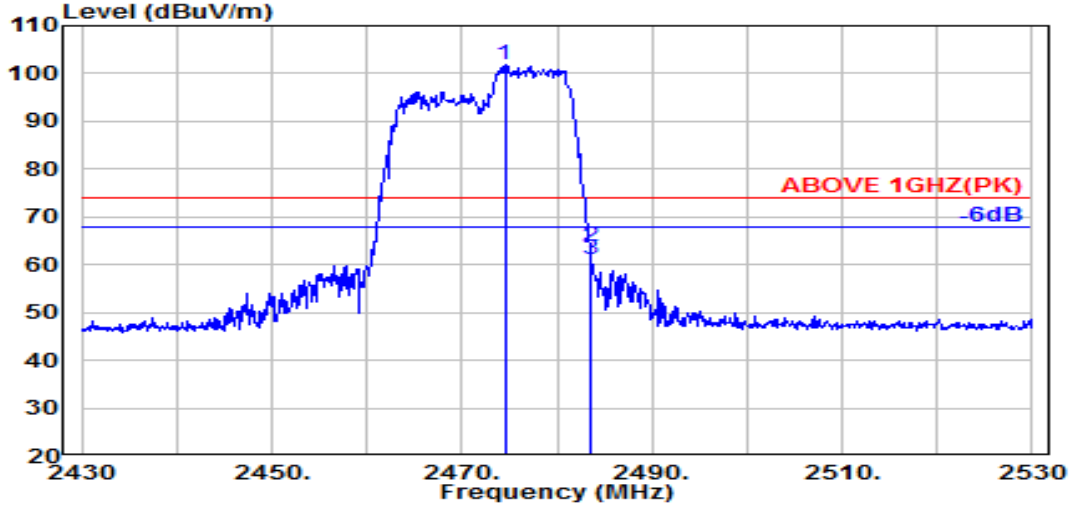

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.500	32.30	5.85	34.52	98.09	101.71	---	---	Peak
2483.500	32.40	5.87	34.53	60.20	63.94	74.00	10.06	Peak
2483.600	32.40	5.87	34.53	57.32	61.06	74.00	12.94	Peak

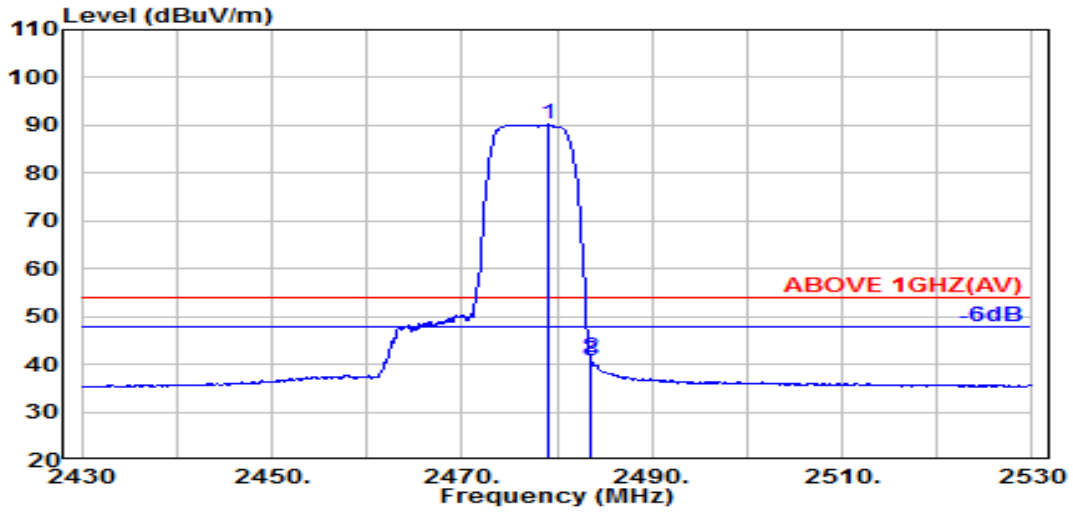


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.200	32.35	5.86	34.53	86.45	90.14	---	---	Average
2483.500	32.40	5.87	34.53	37.69	41.43	54.00	12.57	Average
2483.600	32.40	5.87	34.53	37.03	40.77	54.00	13.23	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

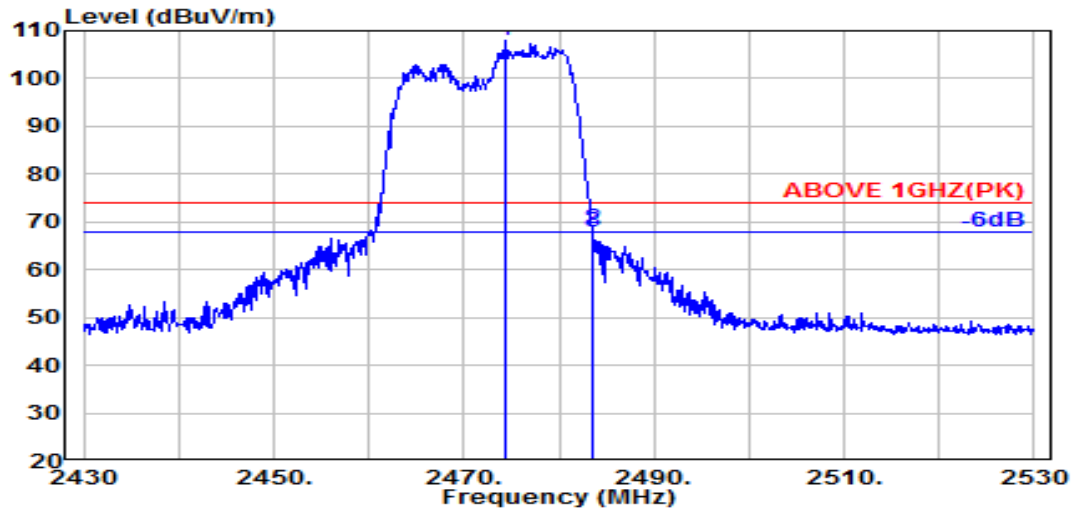

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.300	32.29	5.85	34.52	104.30	107.91	---	---	Peak
2483.500	32.40	5.87	34.53	64.85	68.59	74.00	5.41	Peak
2483.600	32.40	5.87	34.53	64.00	67.74	74.00	6.26	Peak

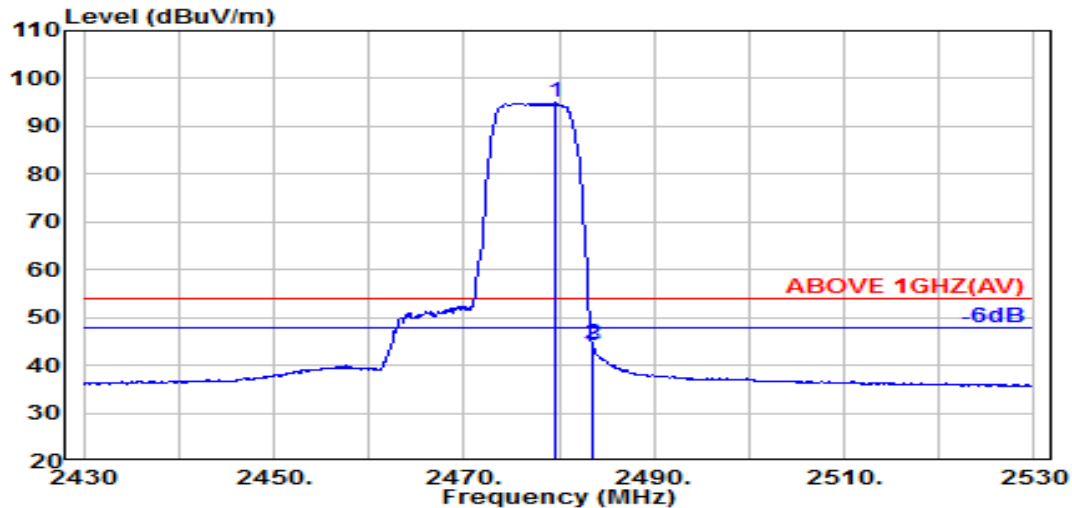


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	32.36	5.86	34.53	91.25	94.94	---	---	Average
2483.500	32.40	5.87	34.53	40.82	44.56	54.00	9.44	Average
2483.600	32.40	5.87	34.53	40.24	43.98	54.00	10.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

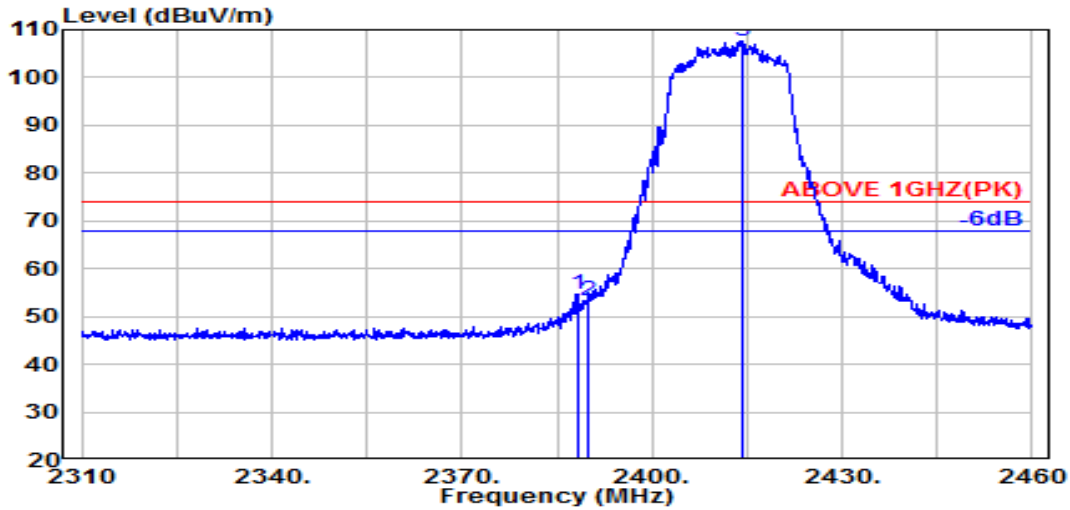

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	32.00	5.72	34.51	51.40	54.61	74.00	19.39	Peak
2390.000	32.00	5.72	34.51	50.10	53.31	74.00	20.69	Peak
@ 2414.400	32.00	5.76	34.51	104.41	107.66	---	---	Peak

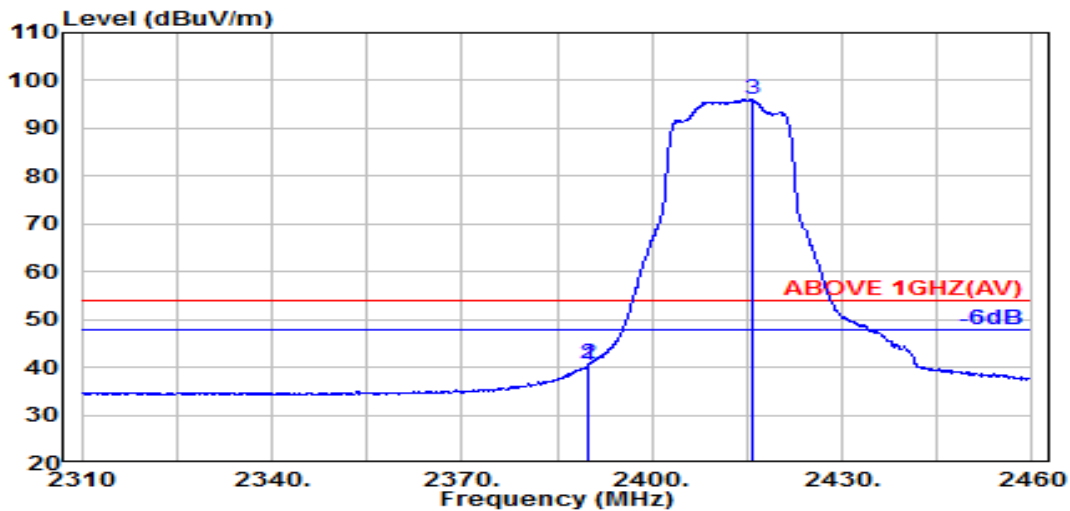


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.900	32.00	5.72	34.51	37.26	40.48	54.00	13.52	Average
2390.000	32.00	5.72	34.51	37.37	40.59	54.00	13.41	Average
@ 2415.900	32.00	5.76	34.51	92.81	96.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

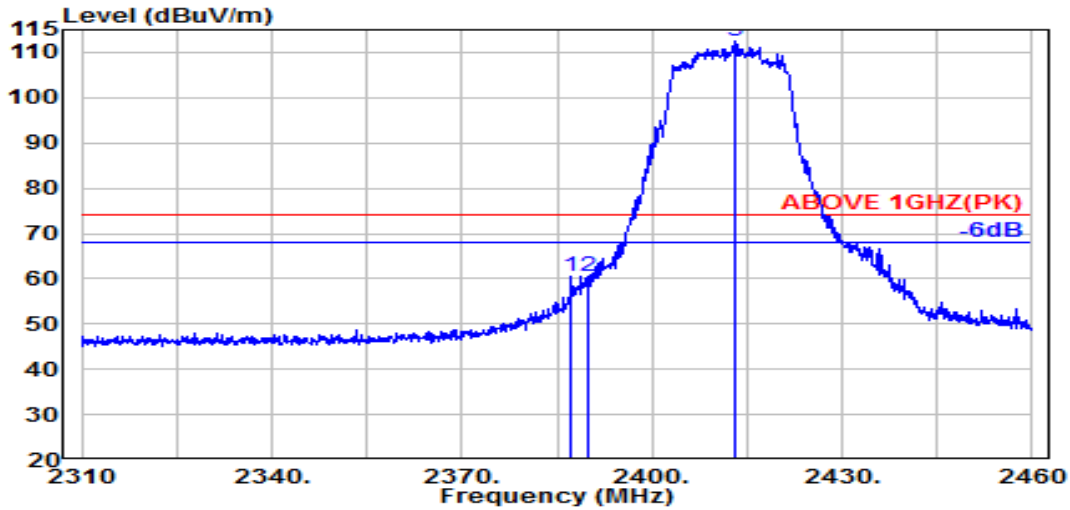

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	32.00	5.72	34.51	57.30	60.51	74.00	13.49	Peak
2390.000	32.00	5.72	34.51	57.22	60.43	74.00	13.57	Peak
@ 2413.200	32.00	5.76	34.51	109.16	112.41	---	---	Peak

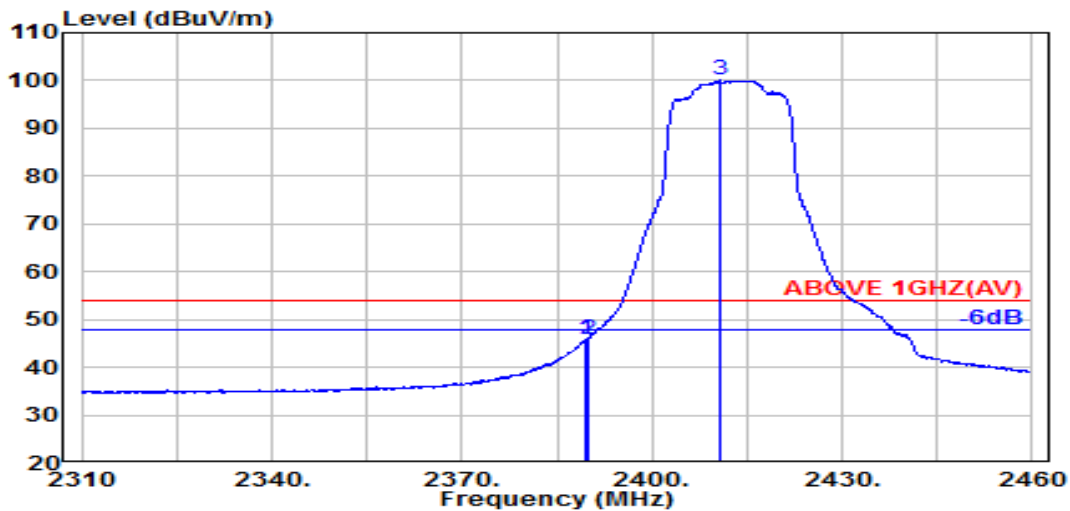


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	32.00	5.72	34.51	42.72	45.93	54.00	8.07	Average
2390.000	32.00	5.72	34.51	42.76	45.97	54.00	8.03	Average
@ 2410.800	32.00	5.75	34.51	96.74	99.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

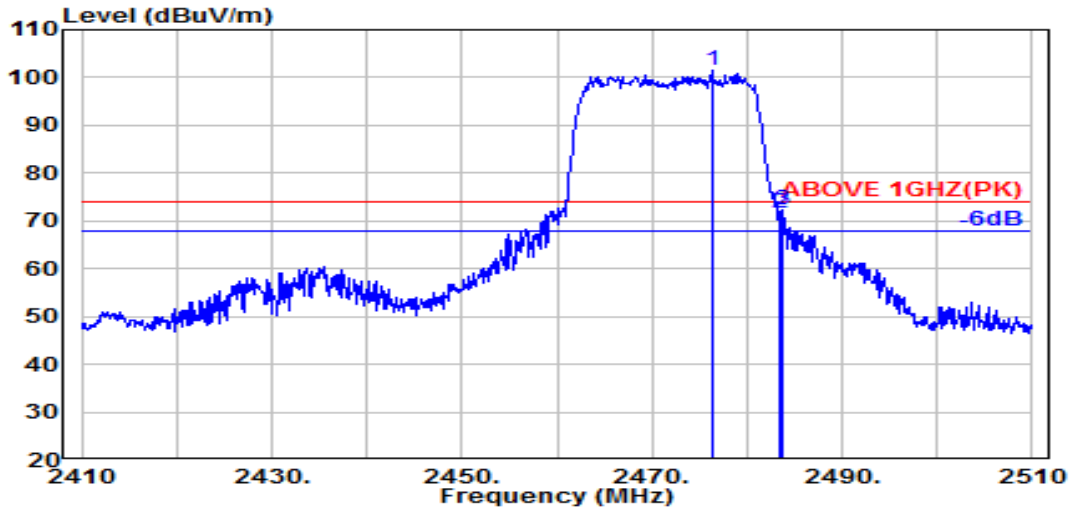

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.300	32.32	5.85	34.53	97.74	101.38	---	---	Peak
2483.500	32.40	5.87	34.53	67.80	71.54	74.00	2.46	Peak
2483.700	32.41	5.87	34.53	68.57	72.31	74.00	1.69	Peak

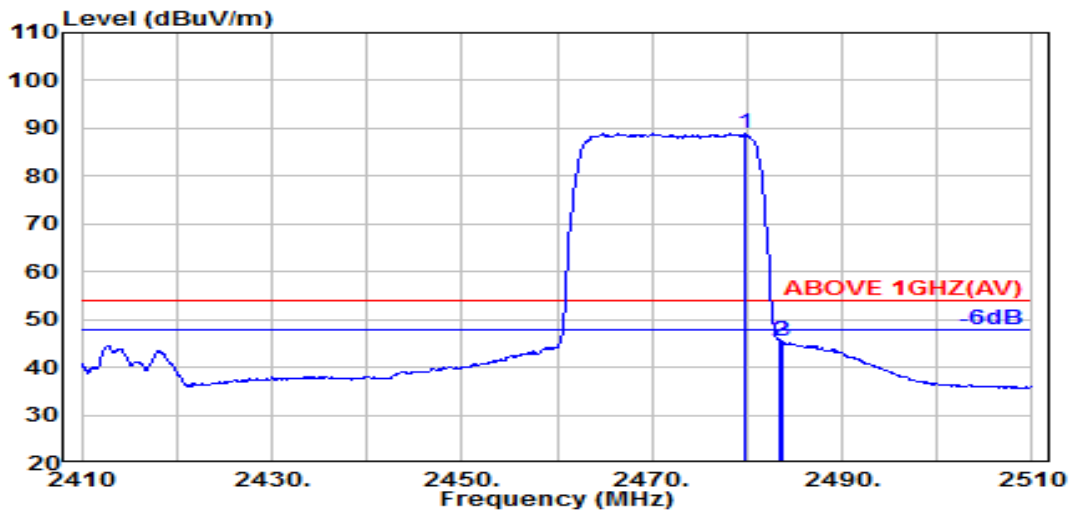


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	32.36	5.86	34.53	85.20	88.90	---	---	Average
2483.500	32.40	5.87	34.53	41.88	45.62	54.00	8.38	Average
2483.700	32.41	5.87	34.53	41.65	45.40	54.00	8.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

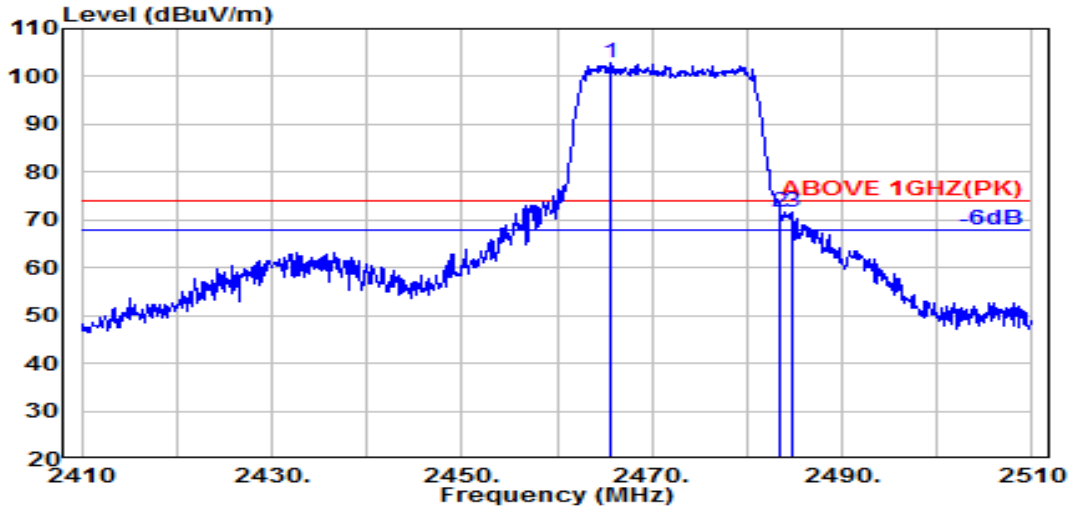

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.600	32.19	5.84	34.52	99.34	102.84	---	---	Peak
2483.500	32.40	5.87	34.53	67.93	71.67	74.00	2.33	Peak
2484.800	32.42	5.87	34.53	67.86	71.62	74.00	2.38	Peak

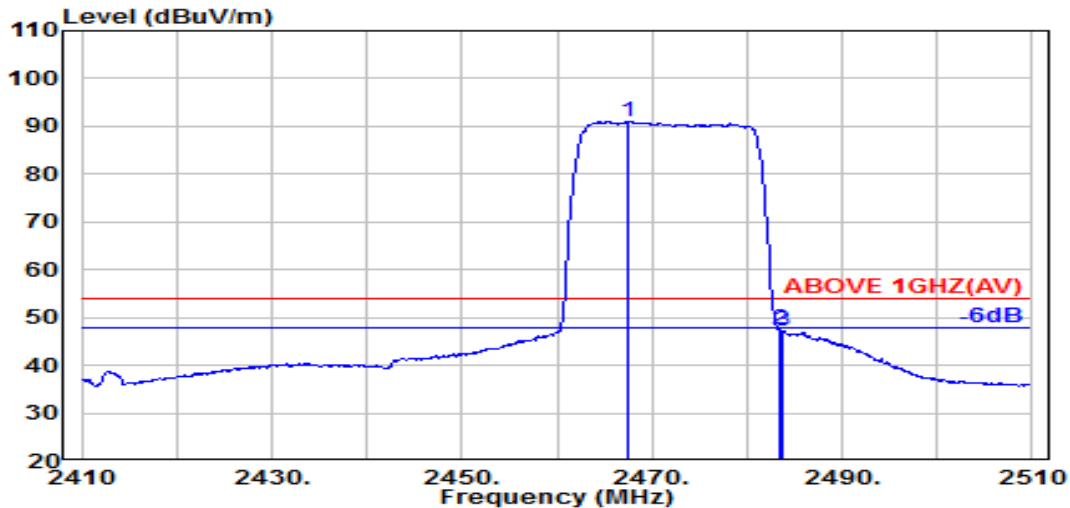


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	32.21	5.84	34.52	87.43	90.96	---	---	Average
2483.500	32.40	5.87	34.53	43.64	47.38	54.00	6.62	Average
2483.600	32.40	5.87	34.53	43.57	47.32	54.00	6.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

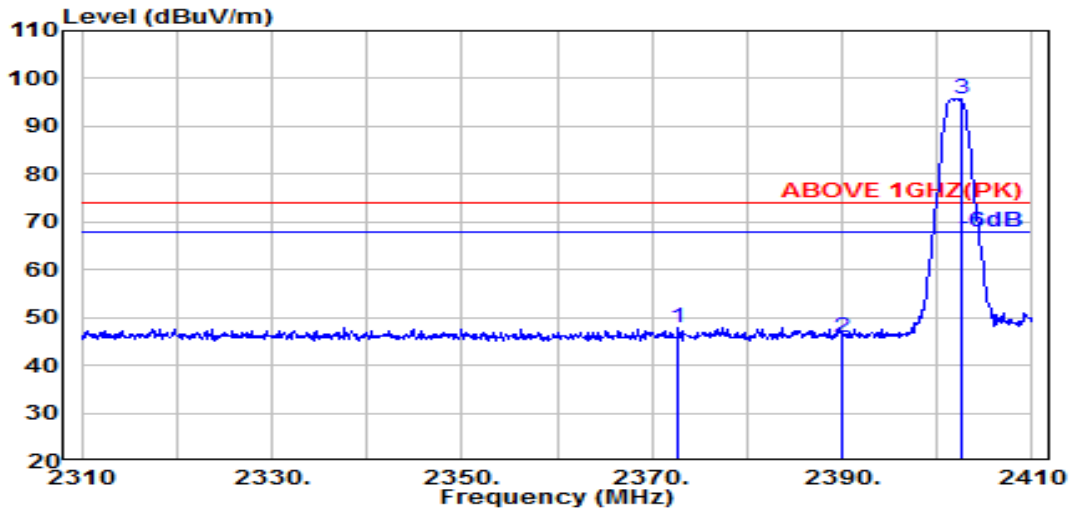

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.800	32.00	5.70	34.50	44.70	47.89	74.00	26.11	Peak
2390.000	32.00	5.72	34.51	42.58	45.79	74.00	28.21	Peak
@ 2402.500	32.00	5.74	34.51	92.65	95.88	---	---	Peak

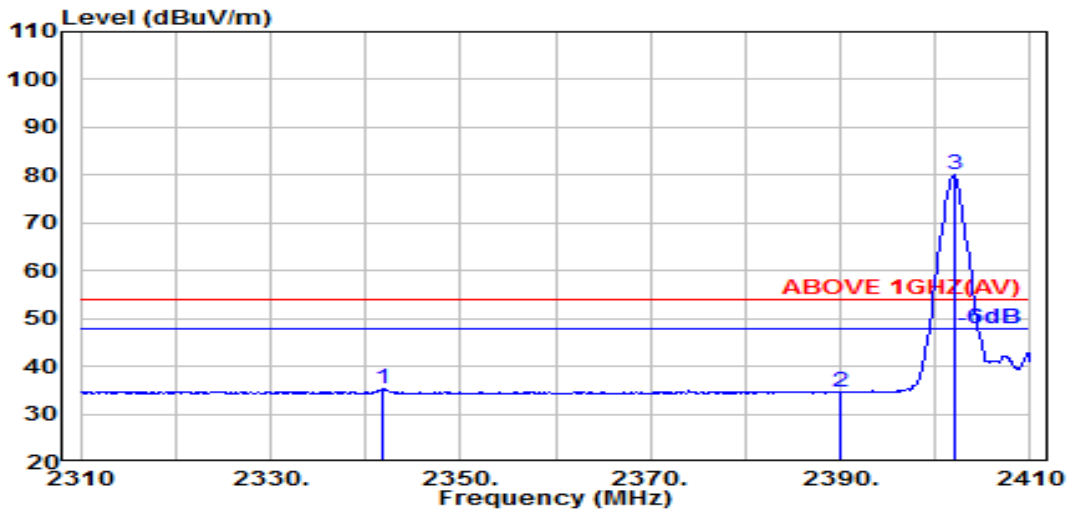


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.800	32.03	5.65	34.50	32.18	35.36	54.00	18.64	Average
2390.000	32.00	5.72	34.51	31.40	34.61	54.00	19.39	Average
@ 2402.000	32.00	5.74	34.51	76.84	80.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

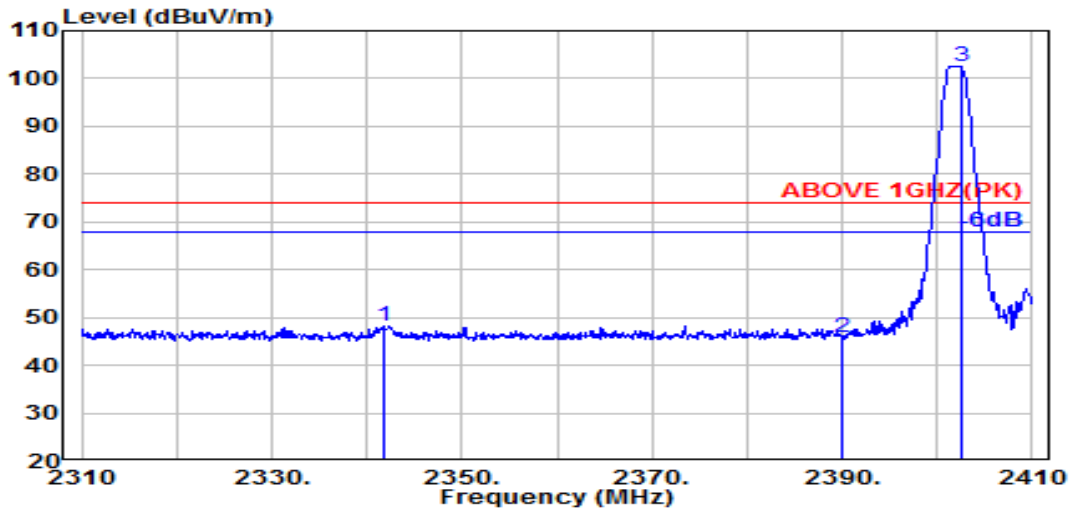

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	32.03	5.65	34.50	45.14	48.32	74.00	25.68	Peak
2390.000	32.00	5.72	34.51	42.71	45.92	74.00	28.08	Peak
@ 2402.500	32.00	5.74	34.51	99.43	102.66	---	---	Peak

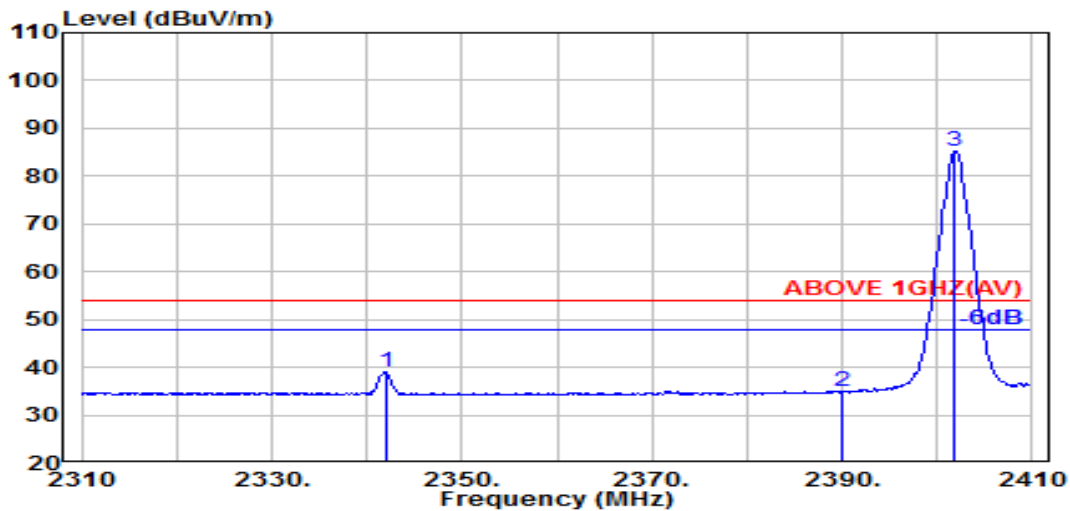


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	32.03	5.65	34.50	35.95	39.13	54.00	14.87	Average
2390.000	32.00	5.72	34.51	31.56	34.77	54.00	19.23	Average
@ 2401.800	32.00	5.74	34.51	82.14	85.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

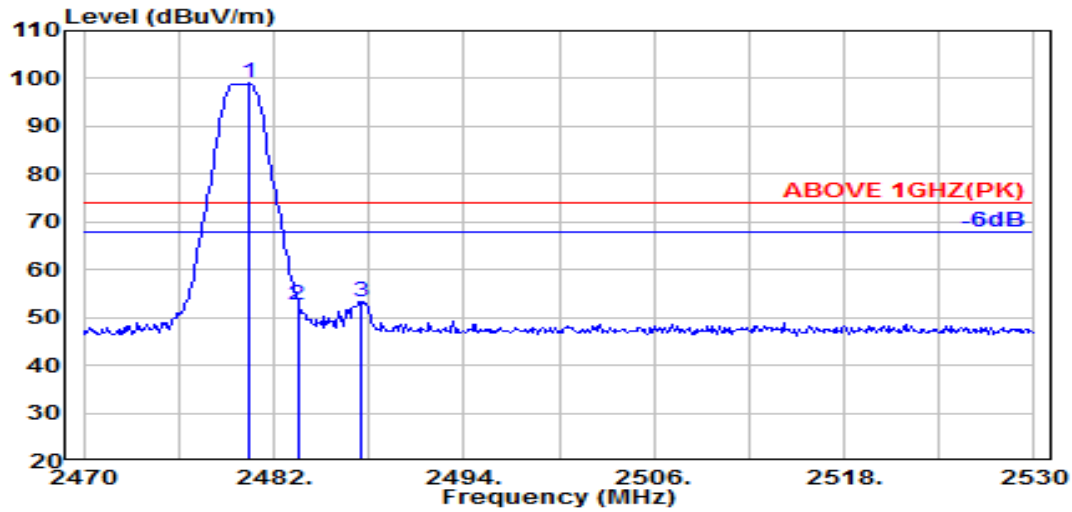

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	32.37	5.86	34.53	95.31	99.01	---	---	Peak
2483.500	32.40	5.87	34.53	48.91	52.65	74.00	21.35	Peak
2487.500	32.45	5.87	34.53	49.52	53.31	74.00	20.69	Peak

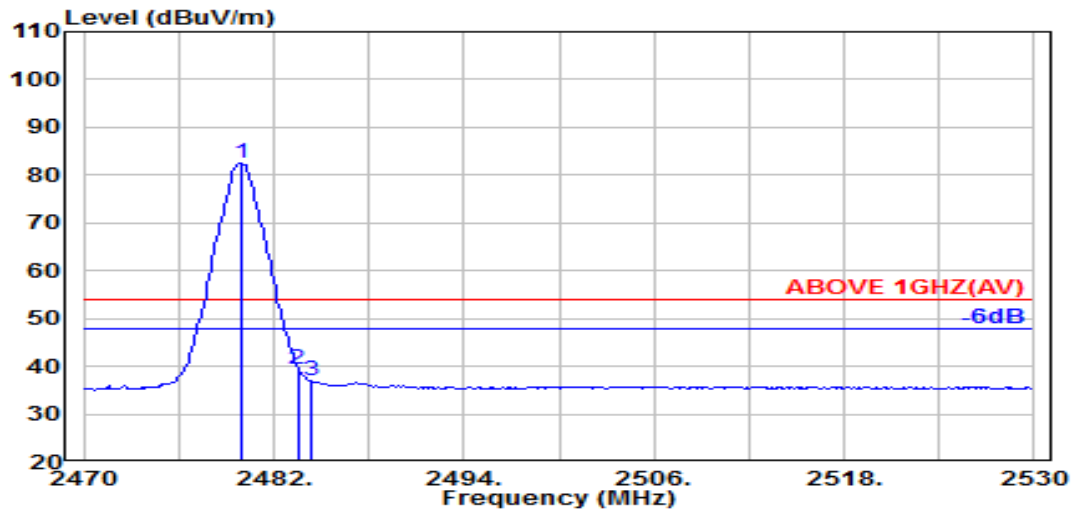


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.36	5.86	34.53	78.91	82.60	---	---	Average
2483.500	32.40	5.87	34.53	35.66	39.40	54.00	14.60	Average
2484.400	32.41	5.87	34.53	33.12	36.88	54.00	17.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

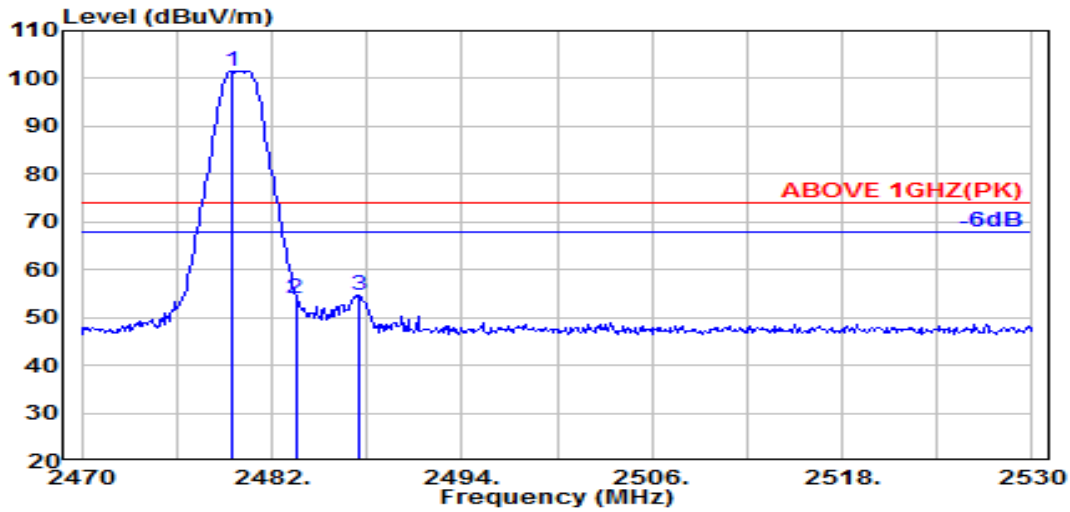

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.36	5.86	34.53	97.88	101.57	---	---	Peak
2483.500	32.40	5.87	34.53	50.29	54.03	74.00	19.97	Peak
2487.500	32.45	5.87	34.53	50.96	54.76	74.00	19.24	Peak

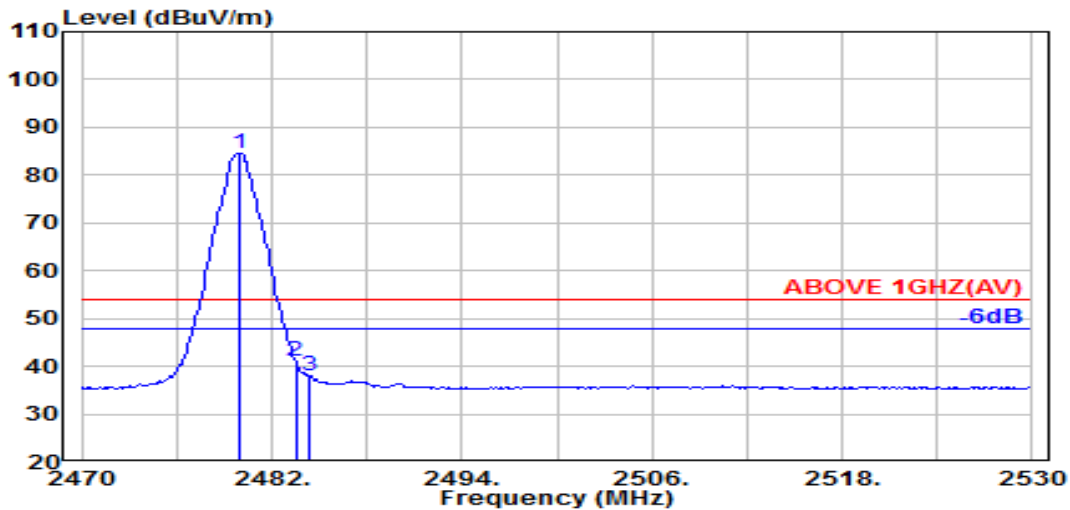

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.36	5.86	34.53	80.96	84.65	---	---	Average
2483.500	32.40	5.87	34.53	37.18	40.93	54.00	13.07	Average
2484.400	32.41	5.87	34.53	34.09	37.84	54.00	16.16	Average

Remark: The "@" means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	29.51	37.80	54.00	16.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	29.97	38.25	54.00	15.75	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	29.49	37.77	54.00	16.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	29.55	37.83	54.00	16.17	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	29.98	38.26	54.00	15.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	30.37	38.66	54.00	15.34	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	29.43	37.72	54.00	16.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	30.67	38.95	54.00	15.05	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	30.71	39.00	54.00	15.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	30.05	38.33	54.00	15.67	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	29.77	38.06	54.00	15.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	29.69	37.97	54.00	16.03	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz		
------	-------------	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	34.11	8.53	34.43	32.72	40.92	54.00	13.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	34.11	8.53	34.43	33.02	41.22	54.00	12.78	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz		
------	-------------	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	34.08	8.63	34.42	29.37	37.67	54.00	16.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	34.08	8.63	34.42	30.48	38.77	54.00	15.23	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz		
------	-------------	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.22	8.75	34.41	32.30	40.86	54.00	13.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.22	8.75	34.41	30.85	39.41	54.00	14.59	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.