


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	7
A.2.3 Emissions in Non-restricted Frequency Bands.....	7
A.3 MAXIMUM OUTPUT POWER	8
A.3.1 Average Output Power	8
A.3.2 Measurement Plots	28

A.1 CONDUCTED EMISSION

Test Date	2023/11/21	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

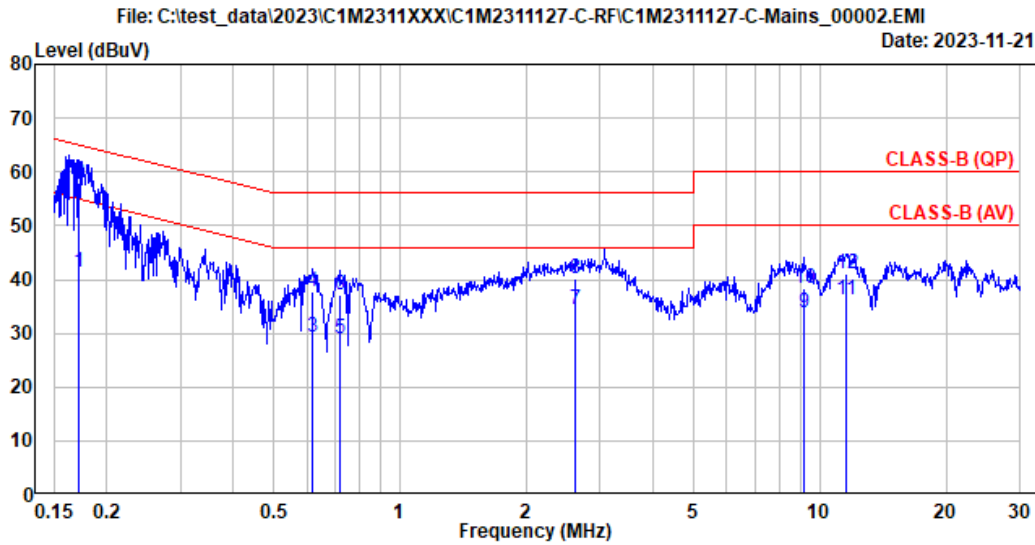


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 15290ST	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.172	10.30	0.03	9.85	21.15	41.33	54.88	13.55	Average
2	0.172	10.30	0.03	9.85	37.78	57.96	64.88	6.92	QP
3	0.621	10.28	0.03	9.85	9.19	29.35	46.00	16.65	Average
4	0.621	10.28	0.03	9.85	17.44	37.60	56.00	18.40	QP
5	0.717	10.29	0.04	9.85	8.92	29.10	46.00	16.90	Average
6	0.717	10.29	0.04	9.85	17.02	37.20	56.00	18.80	QP
7	2.622	10.34	0.07	9.86	14.30	34.57	46.00	11.43	Average
8	2.622	10.34	0.07	9.86	19.78	40.05	56.00	15.95	QP
9	9.161	10.55	0.13	9.88	13.19	33.75	50.00	16.25	Average
10	9.161	10.55	0.13	9.88	17.82	38.38	60.00	21.62	QP
11	11.579	10.66	0.15	9.90	15.44	36.15	50.00	13.85	Average
12	11.579	10.66	0.15	9.90	20.31	41.02	60.00	18.98	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/11/21	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

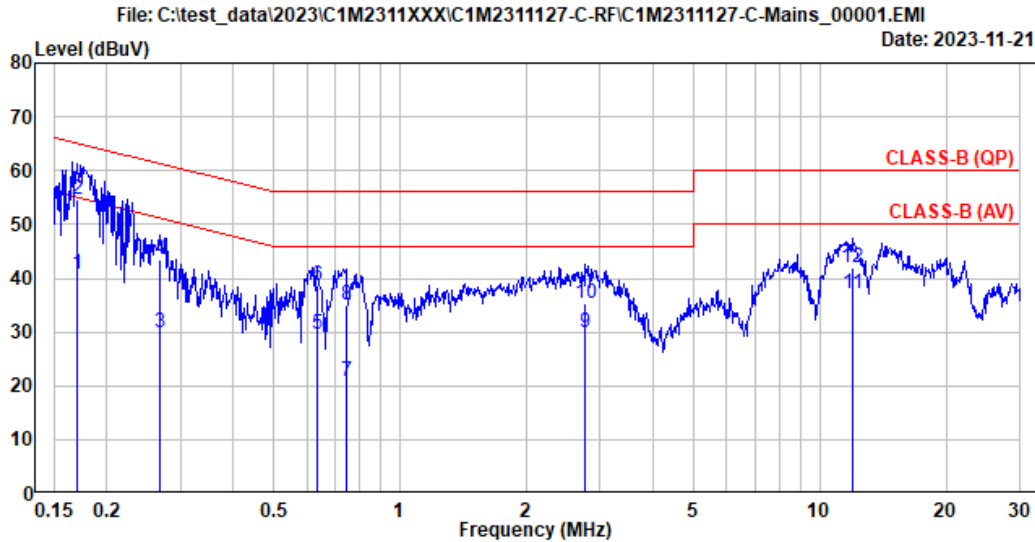

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 15Z90ST	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.171	10.22	0.03	9.85	20.79	40.89	54.92	14.03	Average
2	0.171	10.22	0.03	9.85	34.42	54.52	64.92	10.40	QP
3	0.269	10.22	0.03	9.85	9.89	29.99	51.16	21.17	Average
4	0.269	10.22	0.03	9.85	23.23	43.33	61.16	17.83	QP
5	0.633	10.23	0.04	9.85	9.36	29.48	46.00	16.52	Average
6	0.633	10.23	0.04	9.85	18.48	38.60	56.00	17.40	QP
7	0.743	10.23	0.04	9.85	0.67	20.79	46.00	25.21	Average
8	0.743	10.23	0.04	9.85	15.05	35.17	56.00	20.83	QP
9	2.770	10.26	0.07	9.86	9.76	29.95	46.00	16.05	Average
10	2.770	10.26	0.07	9.86	15.05	35.24	56.00	20.76	QP
11	11.931	10.48	0.15	9.90	16.60	37.13	50.00	12.87	Average
12	11.931	10.48	0.15	9.90	21.53	42.06	60.00	17.94	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2023/11/15	Temp./Hum.	22°C/61%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.425	23.06	1.25	26.52	34.11	31.90	40.00	8.10	Peak
135.083	17.34	2.71	26.09	33.78	27.73	43.50	15.77	Peak
151.250	16.48	2.89	26.01	35.40	28.76	43.50	14.74	Peak
224.808	16.77	3.65	25.77	39.37	34.02	46.00	11.98	Peak
276.542	18.54	4.14	25.69	40.52	37.52	46.00	8.48	Peak
378.392	21.05	5.29	26.35	32.57	32.56	46.00	13.44	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.233	22.77	1.27	0.00	14.80	38.83	40.00	1.17	QP
84.967	13.96	2.11	26.35	38.18	27.90	40.00	12.10	Peak
131.042	17.48	2.66	26.11	33.55	27.57	43.50	15.93	Peak
150.442	16.53	2.88	26.02	36.57	29.96	43.50	13.54	Peak
336.358	19.96	4.82	26.00	33.10	31.87	46.00	14.13	Peak
377.583	21.03	5.28	26.34	32.85	32.82	46.00	13.18	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

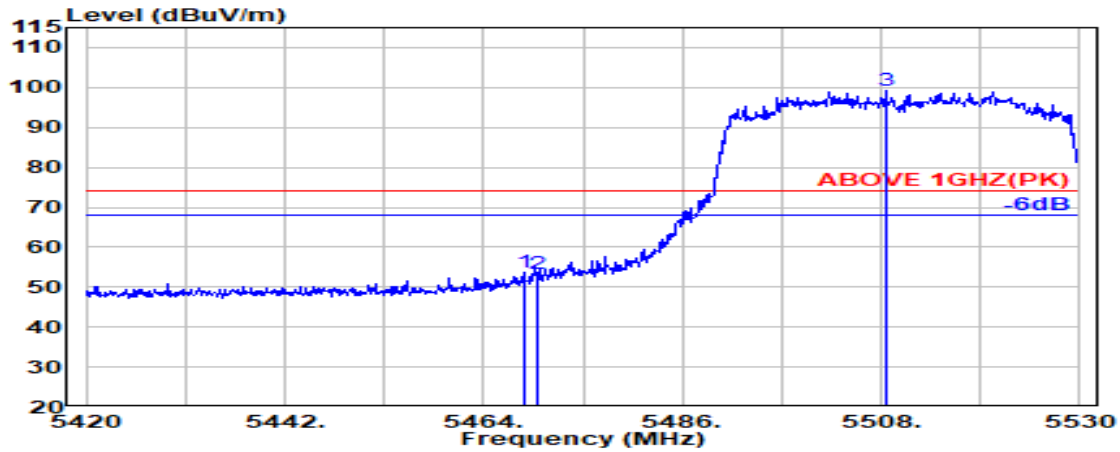

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.16	8.73	34.21	45.01	53.69	74.00	20.31	Peak
5470.000	34.16	8.74	34.21	44.54	53.22	74.00	20.78	Peak
@ 5508.440	34.10	8.76	34.20	90.56	99.22	---	---	Peak

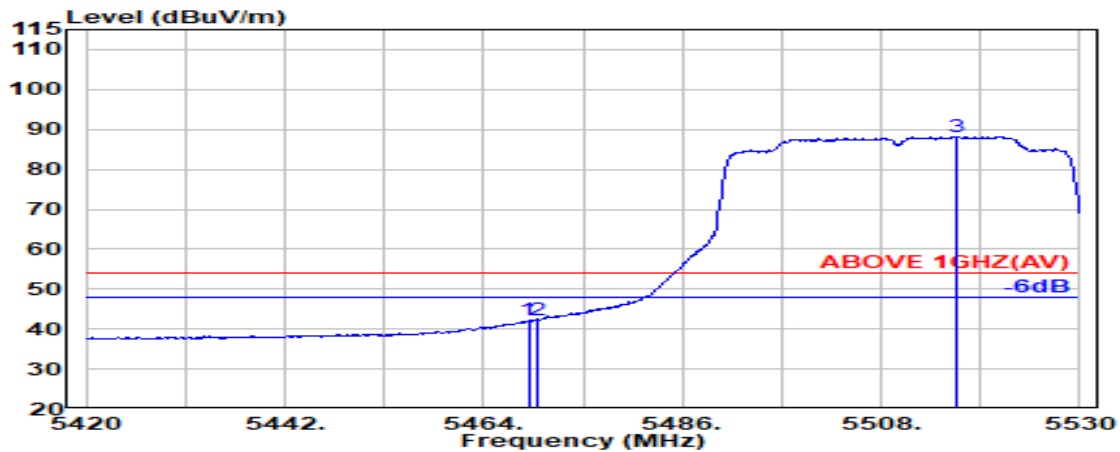


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.16	8.74	34.21	33.37	42.06	54.00	11.94	Average
5470.000	34.16	8.74	34.21	33.41	42.10	54.00	11.90	Average
@ 5516.470	34.10	8.76	34.21	79.53	88.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

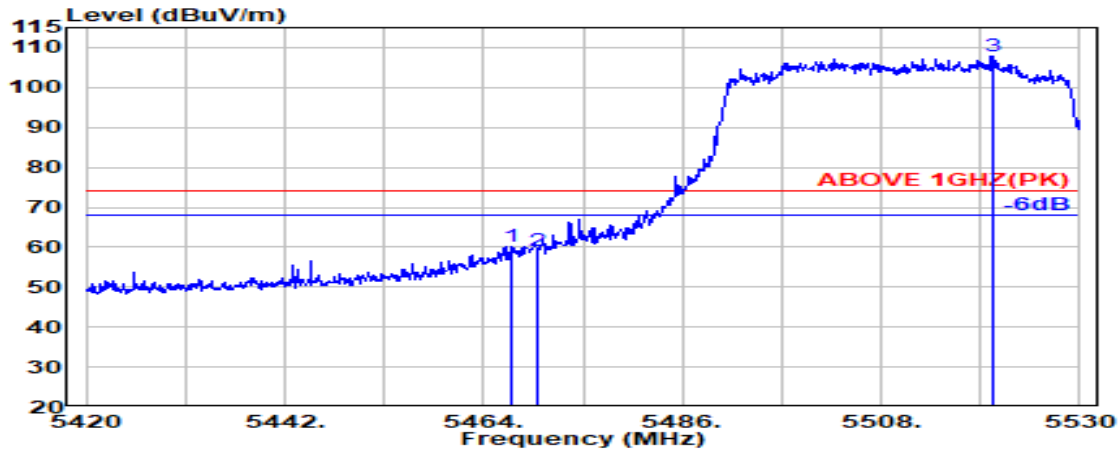

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.970	34.17	8.73	34.21	51.62	60.30	74.00	13.70	Peak
5470.000	34.16	8.74	34.21	50.32	59.00	74.00	15.00	Peak
@ 5520.320	34.10	8.76	34.21	99.19	107.85	---	---	Peak

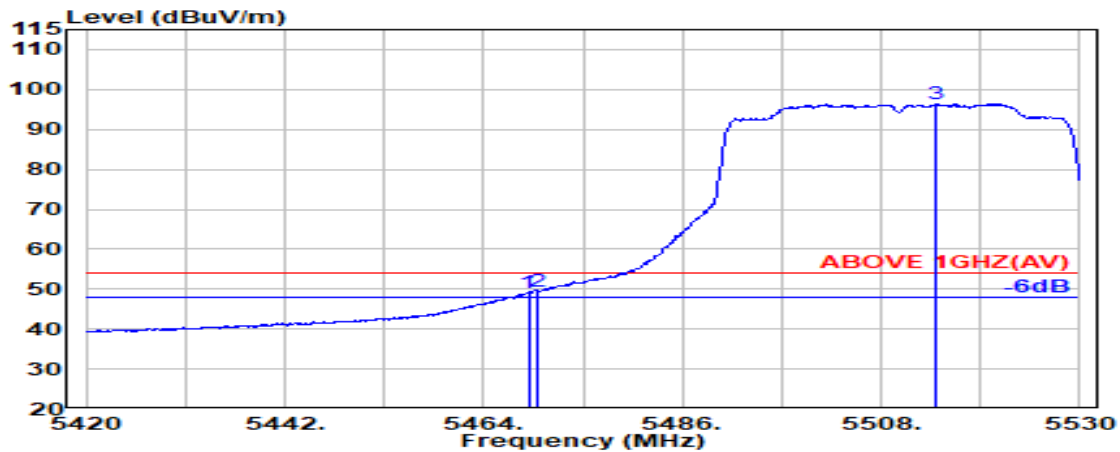

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.16	8.74	34.21	40.48	49.16	54.00	4.84	Average
5470.000	34.16	8.74	34.21	40.87	49.55	54.00	4.45	Average
@ 5514.160	34.10	8.76	34.21	87.78	96.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.15	13.38	34.53	33.71	51.70	54.00	2.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.15	13.38	34.53	34.18	52.18	54.00	1.82	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 MAXIMUM OUTPUT POWER

Test Date	2023/11/15 ~ 23	Temp./Hum.	23 ~ 24°C/51 ~ 55%
Cable Loss	1.0dB	Tested By	Harry Huang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Average Output Power

● SPOT Check

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5180	23.17	23.32	16.777	16.610	18.97	19.13	0.092	24	N/A	
	5200	22.21	22.58	16.626	16.617	19.90	19.68				
	5240	23.23	22.53	16.650	16.607	19.88	19.95				
U-NII Band 2A	5260	22.65	22.80	16.562	16.491	19.60	19.92				
	5300	22.85	23.12	16.589	16.695	20.12	19.89				
	5320	23.38	23.00	16.554	16.646	19.49	18.84				
U-NII Band 2C	5500	23.96	23.25	16.736	16.670	19.34	18.90				
	5580	21.77	22.85	16.646	16.724	20.14	19.98				
	5700	23.03	22.24	16.658	16.504	19.25	19.03				
	5720	23.64	23.46	16.745	16.608	19.99	19.56				
Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 3	5745	16.04	15.34	16.562	16.668	19.66	19.73	0.092	30	N/A	
	5785	16.23	16.35	16.586	16.553	20.08	19.74				
	5825	15.66	16.35	16.515	16.547	19.73	19.97				

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}					
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main									
		Aux	Main	Aux	Main											
U-NII Band 1	5180	22.76	23.41	17.766	17.680	16.88	16.59	N/A	24	N/A						
	5200	23.25	23.13	17.775	17.733	18.02	17.54									
	5240	23.15	22.49	17.735	17.697	18.08	17.55									
U-NII Band 2A	5260	23.61	23.39	17.749	17.709	17.94	17.52			N/A	24	24.69				
	5300	22.50	22.61	17.755	17.736	17.82	17.72					24.52				
	5320	23.24	22.68	17.789	17.680	17.15	17.19					24.56				
U-NII Band 2C	5500	23.23	22.78	17.794	17.739	17.73	17.71					N/A	24	24.58		
	5580	23.61	23.36	17.776	17.780	18.03	17.55							24.68		
	5700	23.60	23.46	17.823	17.731	17.10	16.87							24.70		
	5720	23.31	22.63	17.734	17.729	18.19	18.04							24.55		
U-NII Band 3	5745	17.58	16.98	17.778	17.721	19.85	19.32							N/A	30	N/A
	5785	17.59	10.46	17.635	17.722	19.79	19.41									
	5825	17.64	16.58	17.654	17.641	19.54	19.58									

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}			
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 1	5190	41.75	41.78	36.012	36.026	15.82	15.42	N/A	24	N/A				
	5230	42.68	41.36	36.089	36.022	19.76	19.70							
U-NII Band 2A	5270	43.62	41.41	36.170	35.996	20.00	19.82							
	5310	40.91	41.93	36.077	36.066	15.33	15.42							
U-NII Band 2C	5510	40.54	41.24	36.041	35.974	17.50	16.88							
	5550	41.65	42.27	35.938	35.996	20.29	19.53							
	5670	41.09	41.57	35.960	36.016	19.06	18.67							
	5710	41.59	41.86	36.077	35.943	17.80	17.21							
Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)					Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 3	5755	34.82	35.99	36.120	35.965	19.72	19.45	N/A	30	N/A				
	5795	35.32	28.47	36.122	36.025	19.69	19.88							

- Note: 1. The results have been included cable loss.
 2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.
 3. B is the 26 dB emission bandwidth.
 4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	83.94	83.30	75.058	75.111	13.27	13.08	N/A	24	N/A	
U-NII Band 2A	5290	82.19	81.58	74.986	75.227	13.96	12.55			30.12	
U-NII Band 2C	5530	83.83	82.64	75.073	75.062	14.12	12.52			30.17	
	5610	84.93	88.21	75.281	75.396	18.95	18.90			30.29	
	5690	91.61	91.96	75.305	75.241	19.10	19.09			30.62	
U-NII Band 3	5775	50.53	73.53	75.116	75.184	18.02	17.80	N/A	30	N/A	

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	161.00	162.40	152.880	153.360	10.64	10.63	N/A	24	33.07	
U-NII Band 2C	5570	162.10	161.50	153.090	153.640	13.47	13.36			33.08	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}						
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main										
		Aux	Main	Aux	Main												
U-NII Band 1	5180	22.69	23.65	18.946	18.898	17.13	16.99	N/A	24	N/A							
	5200	22.22	22.31	18.911	18.864	18.09	17.51										
	5240	22.92	23.66	18.879	18.910	18.02	17.90										
U-NII Band 2A	5260	22.38	22.94	18.860	18.931	18.02	17.95			N/A	24	24.50					
	5300	22.49	22.88	18.862	18.861	17.79	17.57					24.52					
	5320	22.74	22.30	18.853	18.903	17.22	17.05					24.48					
U-NII Band 2C	5500	22.70	22.98	18.843	18.907	17.92	17.96					N/A	24	24.56			
	5580	22.21	23.89	18.940	18.877	18.02	17.84							24.47			
	5700	22.96	22.94	18.913	18.887	17.45	17.21							24.61			
	5720	22.27	23.38	18.930	18.882	18.51	18.47							24.48			
Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)								Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main										
		Aux	Main	Aux	Main												
U-NII Band 3	5745	18.79	10.88	18.833	18.885	19.93	19.27	N/A	30					N/A			
	5785	18.80	14.42	18.831	18.930	19.72	19.73										
	5825	17.99	18.54	18.908	18.877	19.90	19.73										

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}			
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 1	5190	42.47	40.65	37.468	37.436	15.31	15.16	N/A	24	N/A				
	5230	41.70	42.27	37.513	37.468	20.13	19.84							
U-NII Band 2A	5270	42.09	40.96	37.690	37.414	19.92	19.71				22.83	27.12		
	5310	41.50	42.09	37.547	37.509	15.30	14.86							
U-NII Band 2C	5510	41.82	41.06	37.460	37.426	17.00	16.83				19.93	27.13		
	5550	43.15	40.84	37.591	37.586	20.16	19.88							
	5670	41.42	41.95	37.496	37.410	18.90	18.22						21.58	27.17
	5710	42.23	41.07	37.513	37.428	17.48	17.27							
U-NII Band 3	5755	34.30	37.47	37.563	37.463	19.62	19.30				22.47	30	N/A	
	5795	35.01	35.87	37.538	37.465	19.85	19.38							
									22.63					

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5210	82.38	82.92	76.722	76.790	12.66	12.49	N/A	24	N/A	
U-NII Band 2A	5290	80.68	83.02	76.461	76.736	13.52	12.54				30.07
U-NII Band 2C	5530	83.83	82.18	76.762	76.446	13.59	11.90				30.15
	5610	84.19	83.23	76.815	76.797	18.76	18.69				30.20
	5690	82.57	85.71	76.679	76.703	18.81	18.86				30.17
Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 3	5775	51.28	67.67	76.543	76.848	18.00	17.71	N/A	20.87	30	N/A

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1/2A	5250	162.10	163.00	154.45	154.88	10.66	10.48	N/A	24	33.10	
U-NII Band 2C	5570	163.00	162.80	154.72	154.90	13.48	13.38				16.44

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5180	26/0	22.69	23.65	18.946	18.898	9.35	9.62	0.283	12.78	24	N/A
		52/37	22.69	23.65	18.946	18.898	13.08	13.24	0.132	16.30		
		106/53	22.69	23.65	18.946	18.898	15.55	15.72	N/A	18.65		
U-NII Band 2A	5320	26/8	22.74	22.30	18.853	18.903	9.60	9.59	0.283	12.89	24	24.48
		52/40	22.74	22.30	18.853	18.903	13.11	13.03	0.132	16.21		24.48
		106/54	22.74	22.30	18.853	18.903	15.28	15.49	N/A	18.40		24.48
U-NII Band 2C	5500	26/0	22.70	22.98	18.843	18.907	9.88	9.89	0.283	13.18	24	24.56
		52/37	22.70	22.98	18.843	18.907	13.02	13.14	0.132	16.22		24.56
		106/53	22.70	22.98	18.843	18.907	15.36	15.00	N/A	18.19		24.56
	5700	26/8	22.96	22.94	18.913	18.887	9.15	9.49	0.283	12.62		24.61
		52/40	22.96	22.94	18.913	18.887	13.18	12.93	0.132	16.20		24.61
		106/54	22.96	22.94	18.913	18.887	16.07	15.68	N/A	18.89		24.61
U-NII Band 3	5745	26/0	18.79	10.88	18.833	18.885	15.73	15.59	0.283	18.95	30	N/A
		52/37	18.79	10.88	18.833	18.885	13.00	12.83	0.132	16.06		
		106/53	18.79	10.88	18.833	18.885	17.40	17.25	N/A	20.34		
5825	26/8	17.99	18.54	18.908	18.877	15.84	15.14	0.283	18.80	30	N/A	
	52/40	17.99	18.54	18.908	18.877	13.18	12.94	0.132	16.20			
	106/54	17.99	18.54	18.908	18.877	17.59	16.82	N/A	20.23			

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5190	242/61	42.47	40.65	37.468	37.436	15.85	16.20	0.150	19.19	24	N/A
U-NII Band 2A	5310	242/62	41.50	42.09	37.547	37.509	15.53	15.89				27.18
U-NII Band 2C	5510	242/61	41.82	41.06	37.460	37.426	17.77	17.71				27.13
	5670	242/62	41.42	41.95	37.496	37.410	18.10	17.83				27.17
Mode 802.11ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
Aux	Main	Aux	Main									
U-NII Band 3	5755	242/61	34.30	37.47	37.563	37.463	20.02	19.42	0.150	22.89	30	N/A
	5795	242/62	35.01	35.87	37.538	37.465	20.06	19.42				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5210	484/65	82.38	82.92	76.722	76.790	13.91	13.98	N/A	16.96	24	N/A
U-NII Band 2A	5290	484/66	80.68	83.02	76.461	76.736	11.73	11.73				30.07
U-NII Band 2C	5530	484/65	83.83	82.18	76.762	76.446	14.96	15.23				30.15
	5610	484/66	84.19	83.23	76.815	76.797	19.13	19.07				30.20
Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
Aux	Main	Aux	Main									
U-NII Band 3	5775	484/65	51.28	67.67	76.543	76.848	19.73	19.27	N/A	22.52	30	N/A
		484/66	51.28	67.67	76.543	76.848	20.18	19.64				

Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1/2A	5250	996/97	162.10	163.00	154.45	154.88	13.15	12.97	0.159	16.23	24	33.10
		996/S67	162.10	163.00	154.45	154.88	11.51	10.38				33.10
U-NII Band 2C	5570	996/97	163.00	162.80	154.72	154.90	13.27	12.87				33.12
		996/S67	163.00	162.80	154.72	154.90	16.49	16.11				19.47

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.8.

3. B is the 26 dB emission bandwidth.

4. We did spot check for output power and all output power values keep identical thus other conducted items is exempt.

● **Original FCC ID: BEJNT-15Z90RT Power**

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5180	23.17	23.32	16.777	16.610	19.30	19.17	N/A	24	N/A	
	5200	22.21	22.58	16.626	16.617	20.14	19.70				
	5240	23.23	22.53	16.650	16.607	20.09	20.10				
U-NII Band 2A	5260	22.65	22.80	16.562	16.491	20.06	20.14	N/A	24	24.55	
	5300	22.85	23.12	16.589	16.695	20.13	20.15			24.59	
	5320	23.38	23.00	16.554	16.646	19.55	19.30			24.62	
U-NII Band 2C	5500	23.96	23.25	16.736	16.670	19.69	19.40	N/A	24	24.66	
	5580	21.77	22.85	16.646	16.724	20.35	20.12			24.38	
	5700	23.03	22.24	16.658	16.504	19.68	19.47			24.47	
	5720	23.64	23.46	16.745	16.608	20.10	19.93			24.70	
Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 3	5745	16.04	15.34	16.562	16.668	20.09	19.96	N/A	30	N/A	
	5785	16.23	16.35	16.586	16.553	20.15	20.04				
	5825	15.66	16.35	16.515	16.547	20.07	20.05				

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}						
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main										
		Aux	Main	Aux	Main												
U-NII Band 1	5180	22.76	23.41	17.766	17.680	17.24	16.88	N/A	24	N/A							
	5200	23.25	23.13	17.775	17.733	18.15	17.83										
	5240	23.15	22.49	17.735	17.697	18.11	17.92										
U-NII Band 2A	5260	23.61	23.39	17.749	17.709	18.08	17.90			N/A	24	24.69					
	5300	22.50	22.61	17.755	17.736	18.13	17.87					24.52					
	5320	23.24	22.68	17.789	17.680	17.40	17.23					24.56					
U-NII Band 2C	5500	23.23	22.78	17.794	17.739	18.19	17.88					N/A	24	24.58			
	5580	23.61	23.36	17.776	17.780	18.26	17.88							24.68			
	5700	23.60	23.46	17.823	17.731	17.58	17.22							24.70			
	5720	23.31	22.63	17.734	17.729	18.50	18.41							24.55			
Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)								Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main										
		Aux	Main	Aux	Main												
U-NII Band 3	5745	17.58	16.98	17.778	17.721	20.02	19.66	N/A	30					N/A			
	5785	17.59	10.46	17.635	17.722	20.11	19.69										
	5825	17.64	16.58	17.654	17.641	20.02	19.74										

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5190	41.75	41.78	36.012	36.026	15.92	15.50	N/A	24	N/A	
	5230	42.68	41.36	36.089	36.022	20.23	20.14				
U-NII Band 2A	5270	43.62	41.41	36.170	35.996	20.26	20.06				
	5310	40.91	41.93	36.077	36.066	15.79	15.43				
U-NII Band 2C	5510	40.54	41.24	36.041	35.974	17.72	17.28				
	5550	41.65	42.27	35.938	35.996	20.29	19.96				
	5670	41.09	41.57	35.960	36.016	19.37	18.85				
	5710	41.59	41.86	36.077	35.943	18.13	17.64				
Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 3	5755	34.82	35.99	36.120	35.965	20.09	19.83	N/A	30	N/A	
	5795	35.32	28.47	36.122	36.025	20.12	19.89				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	83.94	83.30	75.058	75.111	13.38	13.10	N/A	24	N/A	
U-NII Band 2A	5290	82.19	81.58	74.986	75.227	14.10	12.97			30.12	
U-NII Band 2C	5530	83.83	82.64	75.073	75.062	14.13	12.64			30.17	
	5610	84.93	88.21	75.281	75.396	20.21	19.80			30.29	
	5690	91.61	91.96	75.305	75.241	19.48	19.81			30.62	
U-NII Band 3	5775	50.53	73.53	75.116	75.184	18.20	18.17	N/A	30	N/A	

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	161.00	162.40	152.880	153.360	11.21	11.07	N/A	24	33.07	
U-NII Band 2C	5570	162.10	161.50	153.090	153.640	14.41	14.29			33.08	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}		
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main						
		Aux	Main	Aux	Main								
U-NII Band 1	5180	22.69	23.65	18.946	18.898	17.36	17.04	N/A	24	N/A			
	5200	22.22	22.31	18.911	18.864	18.23	17.92						
	5240	22.92	23.66	18.879	18.910	18.17	18.02						
U-NII Band 2A	5260	22.38	22.94	18.860	18.931	18.13	18.05						
	5300	22.49	22.88	18.862	18.861	18.23	17.91						
	5320	22.74	22.30	18.853	18.903	17.64	17.33						
U-NII Band 2C	5500	22.70	22.98	18.843	18.907	18.27	18.05						
	5580	22.21	23.89	18.940	18.877	18.28	18.02						
	5700	22.96	22.94	18.913	18.887	17.72	17.31						
	5720	22.27	23.38	18.930	18.882	18.65	18.56						
Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)				Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main						
		Aux	Main	Aux	Main								
U-NII Band 3	5745	18.79	10.88	18.833	18.885	20.12	19.63	N/A	30	N/A			
	5785	18.80	14.42	18.831	18.930	20.09	19.79						
	5825	17.99	18.54	18.908	18.877	20.07	19.91						

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}			
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 1	5190	42.47	40.65	37.468	37.436	15.61	15.20	N/A	24	N/A				
	5230	41.70	42.27	37.513	37.468	20.19	19.87							
U-NII Band 2A	5270	42.09	40.96	37.690	37.414	20.29	19.92							
	5310	41.50	42.09	37.547	37.509	15.54	15.18							
U-NII Band 2C	5510	41.82	41.06	37.460	37.426	17.35	17.10							
	5550	43.15	40.84	37.591	37.586	20.27	20.10							
	5670	41.42	41.95	37.496	37.410	19.08	18.63							
	5710	42.23	41.07	37.513	37.428	17.87	17.40							
Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)					Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 3	5755	34.30	37.47	37.563	37.463	20.04	19.71	N/A	30	N/A				
	5795	35.01	35.87	37.538	37.465	20.08	19.75							

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	82.38	82.92	76.722	76.790	13.08	12.75	N/A	15.93	24	N/A
U-NII Band 2A	5290	80.68	83.02	76.461	76.736	13.83	12.78		16.35		30.07
U-NII Band 2C	5530	83.83	82.18	76.762	76.446	13.82	12.18		16.09		30.15
	5610	84.19	83.23	76.815	76.797	19.84	19.18		22.53		30.20
	5690	82.57	85.71	76.679	76.703	19.73	19.54	22.65	30.17		
Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	51.28	67.67	76.543	76.848	18.11	18.36	N/A	21.25	30	N/A

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	162.10	163.00	154.45	154.88	11.01	10.89	0.092	14.05	24	33.10
U-NII Band 2C	5570	163.00	162.80	154.72	154.90	14.31	14.10		17.31		33.12

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+1 0 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5180	26/0	22.69	23.65	18.946	18.898	9.63	9.84	0.269	13.02	24	N/A
		52/37	22.69	23.65	18.946	18.898	13.37	13.26	0.132	16.46		
		106/53	22.69	23.65	18.946	18.898	15.92	15.72	N/A	18.83		
U-NII Band 2A	5320	26/8	22.74	22.30	18.853	18.903	9.64	9.72	0.269	12.96	24	24.48
		52/40	22.74	22.30	18.853	18.903	13.28	13.17	0.132	16.37		24.48
		106/54	22.74	22.30	18.853	18.903	15.73	15.71	N/A	18.73		24.48
U-NII Band 2C	5500	26/0	22.70	22.98	18.843	18.907	10.01	9.91	0.269	13.24	24	24.56
		52/37	22.70	22.98	18.843	18.907	13.46	13.41	0.132	16.58		24.56
		106/53	22.70	22.98	18.843	18.907	15.39	15.28	N/A	18.35		24.56
	5700	26/8	22.96	22.94	18.913	18.887	9.53	9.66	0.269	12.87		24.61
		52/40	22.96	22.94	18.913	18.887	13.26	13.20	0.132	16.37		24.61
		106/54	22.96	22.94	18.913	18.887	16.26	16.08	N/A	19.18		24.61
U-NII Band 3	5745	26/0	18.79	10.88	18.833	18.885	15.95	15.60	0.269	19.06	30	N/A
		52/37	18.79	10.88	18.833	18.885	13.14	13.11	0.132	16.27		
		106/53	18.79	10.88	18.833	18.885	17.81	17.59	N/A	20.71		
5825	26/8	17.99	18.54	18.908	18.877	16.05	15.47	0.173	19.05	30	N/A	
	52/40	17.99	18.54	18.908	18.877	13.48	13.11	0.119	16.44			
	106/54	17.99	18.54	18.908	18.877	17.60	17.06	N/A	20.35			

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11 ax- HE40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(1 dBm+ 10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5190	242/61	42.47	40.65	37.468	37.436	16.31	16.24	0.150	24	N/A	
U-NII Band 2A	5310	242/62	41.50	42.09	37.547	37.509	15.82	16.06				
U-NII Band 2C	5510	242/61	41.82	41.06	37.460	37.426	18.21	18.00				
	5670	242/62	41.42	41.95	37.496	37.410	18.31	17.90				
U-NII Band 3	5755	242/61	34.30	37.47	37.563	37.463	20.11	19.82	0.150	30	N/A	
	5795	242/62	35.01	35.87	37.538	37.465	20.14	19.86				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5210	484/65	82.38	82.92	76.722	76.790	14.22	14.35	0.092	24	N/A	
U-NII Band 2A	5290	484/66	80.68	83.02	76.461	76.736	12.09	12.11				
U-NII Band 2C	5530	484/65	83.83	82.18	76.762	76.446	15.27	15.39				
	5610	484/66	84.19	83.23	76.815	76.797	19.62	19.17				
U-NII Band 3	5775	484/65	51.28	67.67	76.543	76.848	19.77	19.31	0.092	30	N/A	
		484/66	51.28	67.67	76.543	76.848	20.33	19.98				


Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1/2A	5250	996/97	162.10	163.00	154.45	154.88	13.47	13.09	0.191	24	33.10	
		996/S67	162.10	163.00	154.45	154.88	11.71	11.21				
U-NII Band 2C	5570	996/97	163.00	162.80	154.72	154.90	13.61	13.39				
		996/S67	163.00	162.80	154.72	154.90	16.54	16.24				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.


A.3.2 Measurement Plots

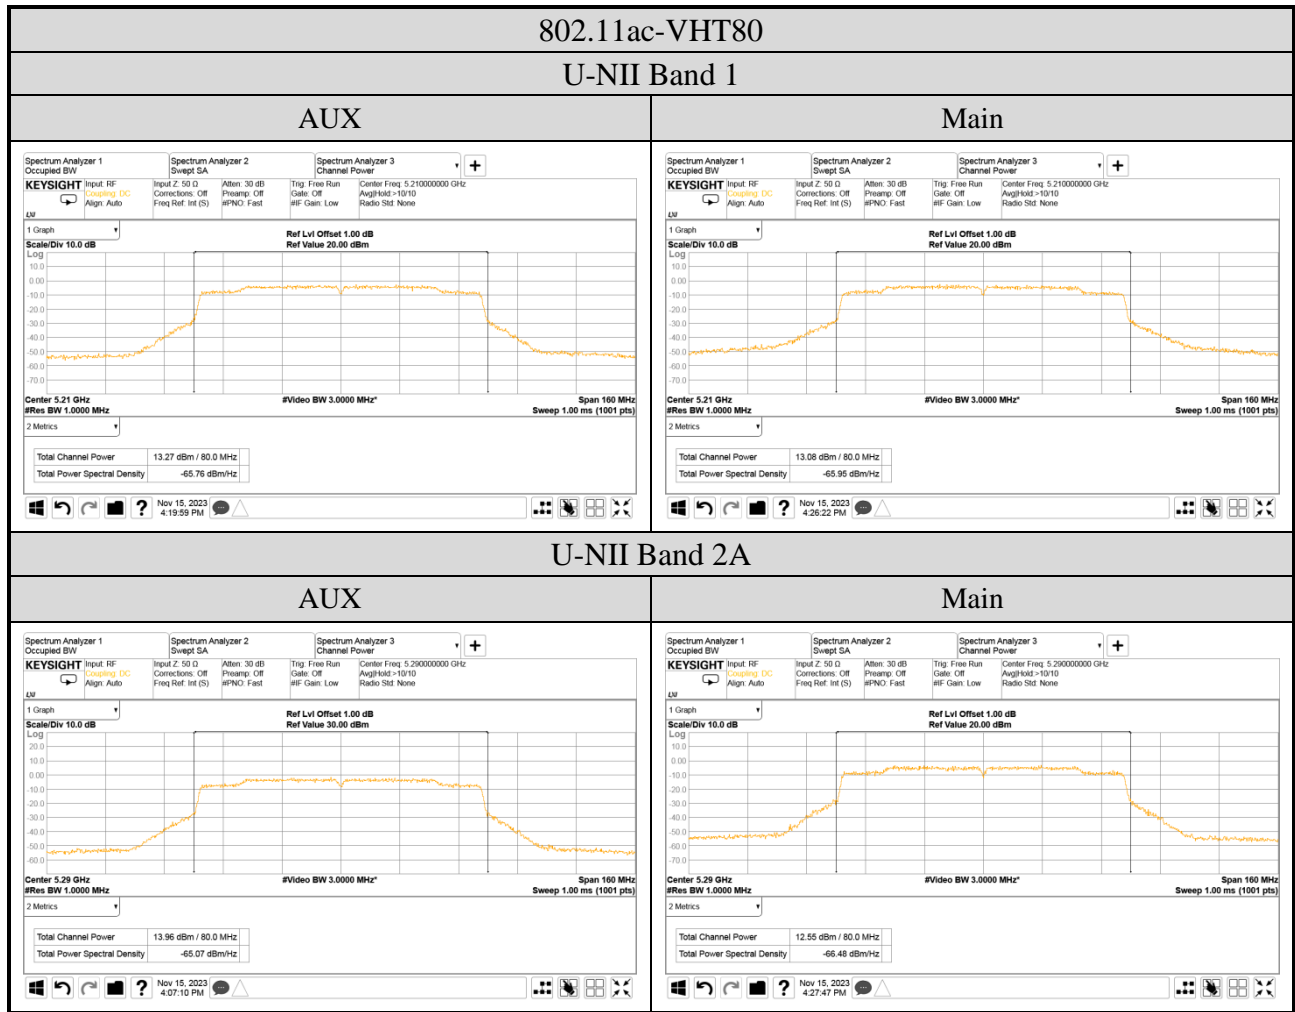



Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



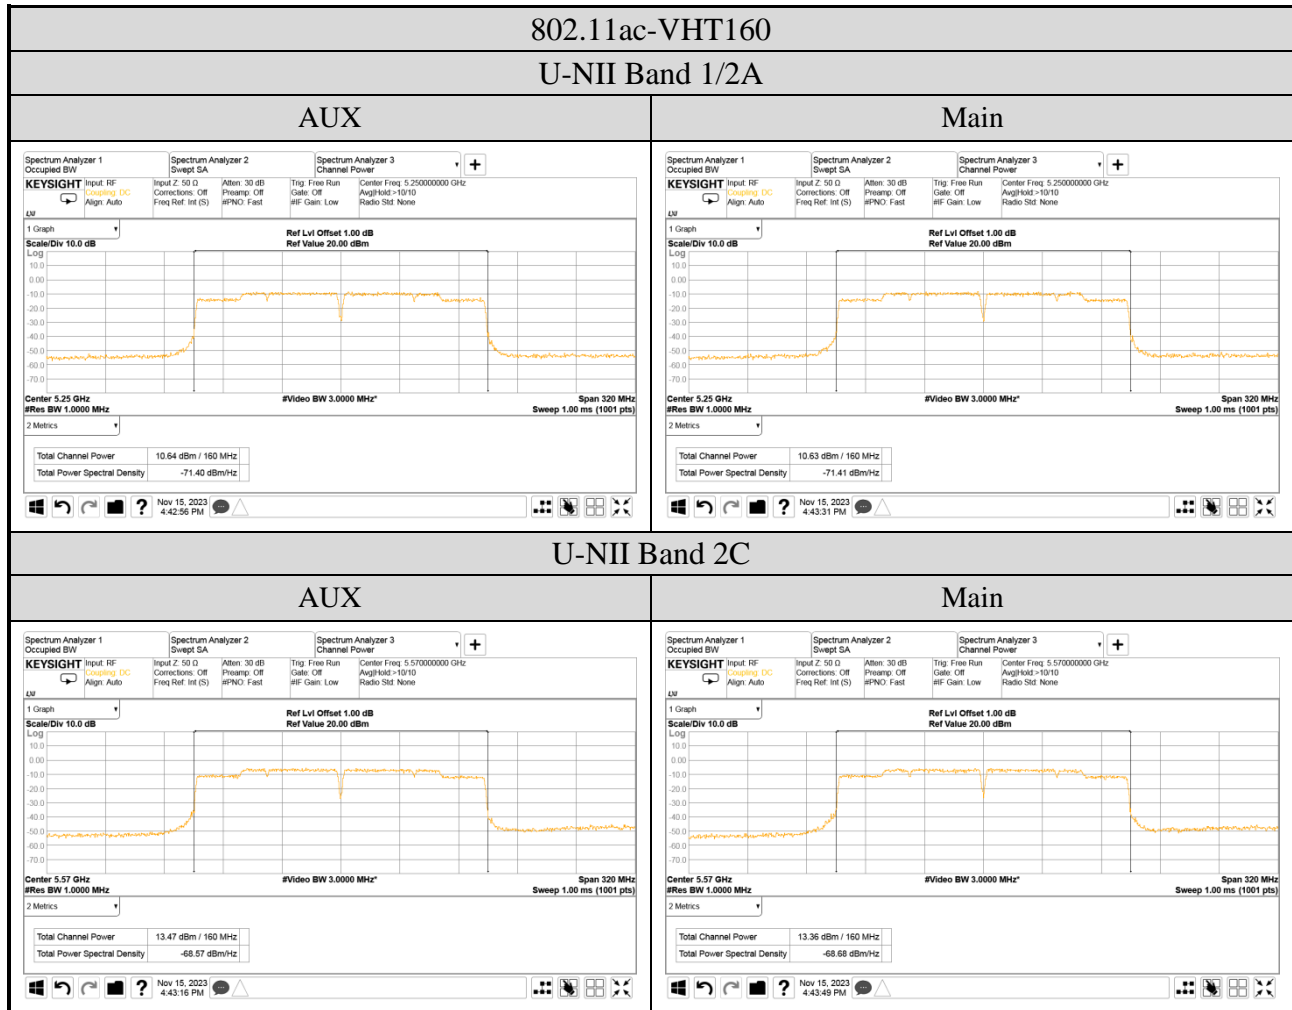

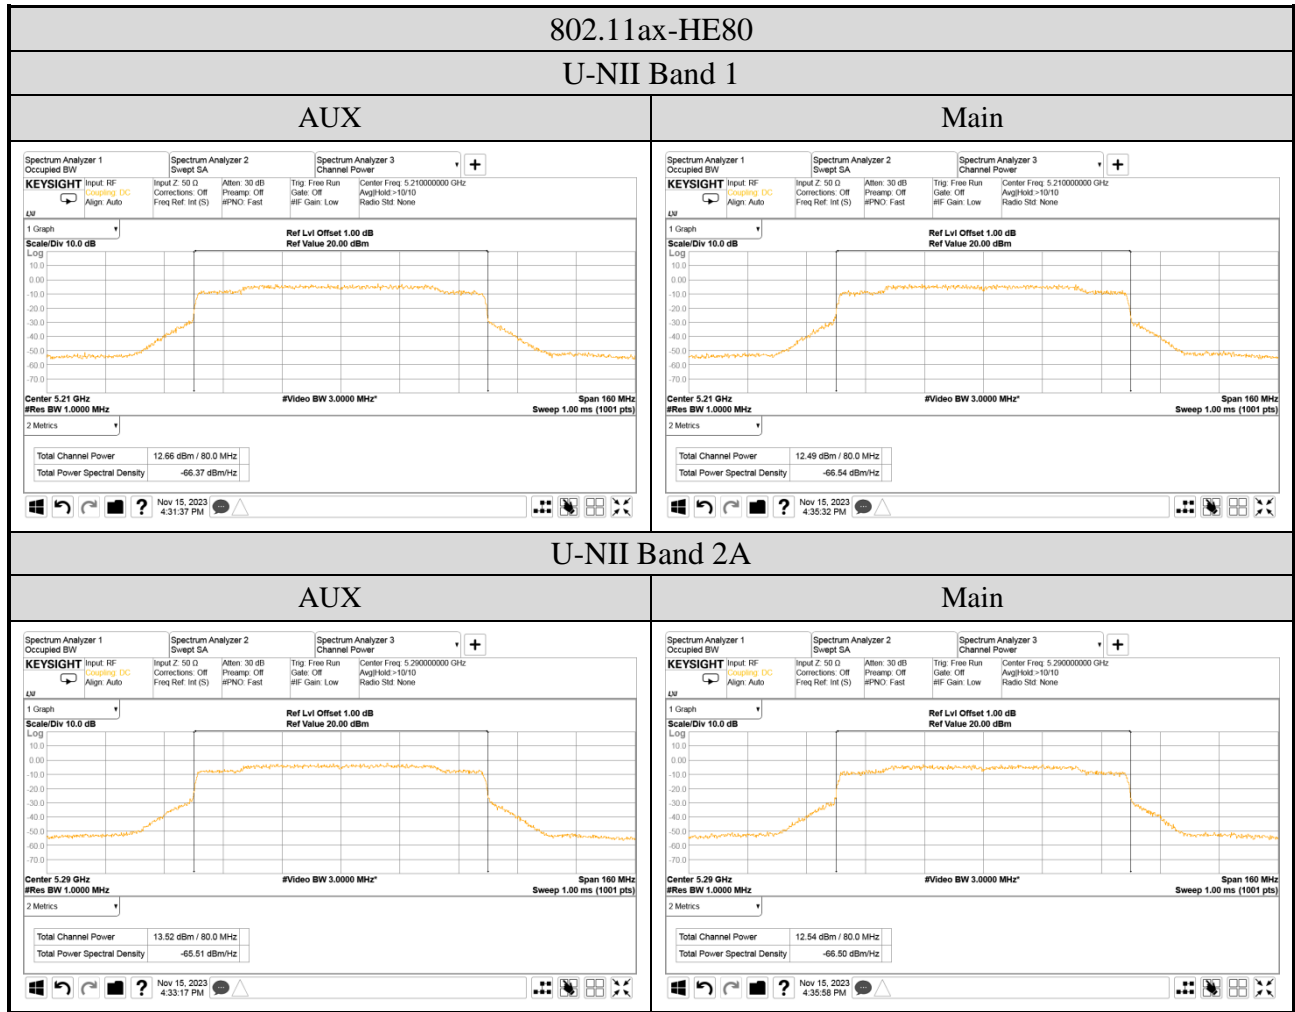

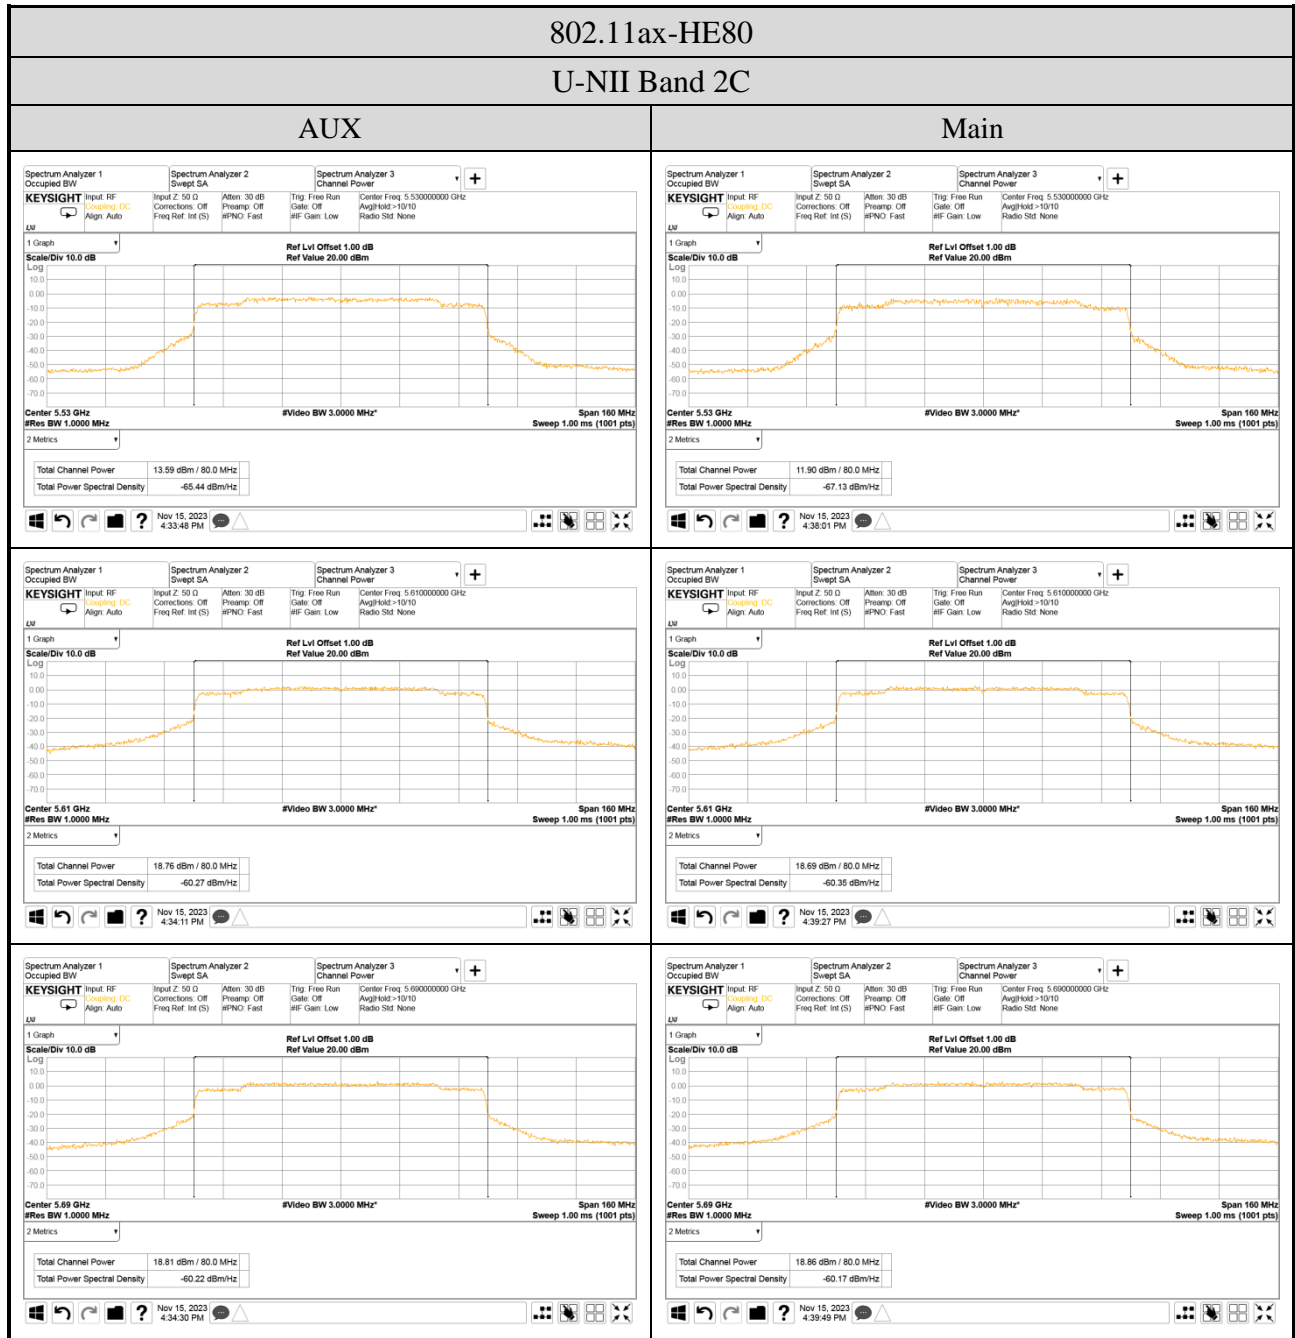

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

