

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	100
A.2.3 Emissions in Non-restricted Frequency Bands:.....	103
A.3 6dB OCCUPIED BANDWIDTH	104
A.3.1 Emission Bandwidth Result.....	104
A.3.2 Measurement Plots	106
A.4 MAXIMUM PEAK OUTPUT POWER	112
A.4.1 Peak Output Power	112
A.4.2 Average Output Power (Reporting only).....	124
A.4.3 Measurement Plots	133
A.5 EMISSION LIMITATIONS	135
A.6 POWER SPECTRAL DENSITY	162
A.6.1 Power Spectral Density Result	162
A.6.2 Measurement Plots	164

A.1 CONDUCTED EMISSION

Test Date	2021/08/08	Temp./Hum.	27°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

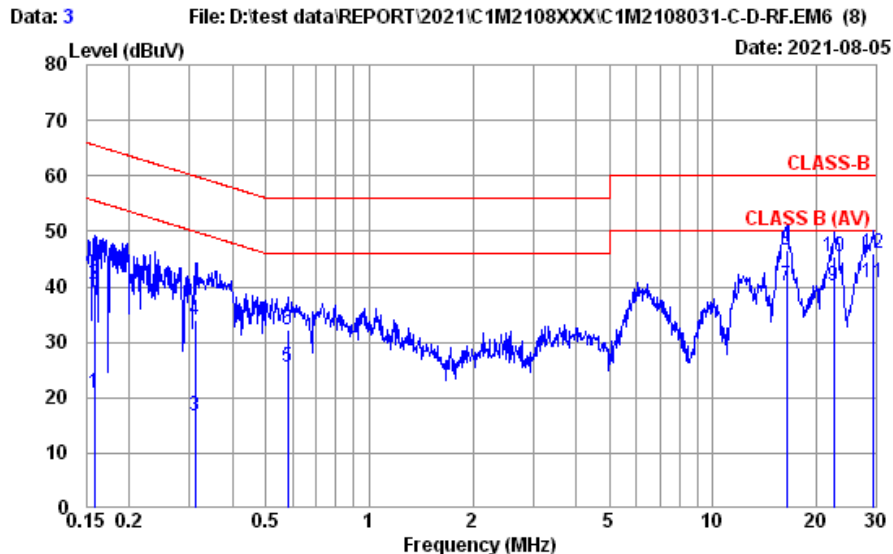


Site No. : No.8 Shielded Room Data No. : 3
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : NEUTRAL
 Environment : 27°C / 50% Engineer : Roy Hung
 EUT Model : 15Z95P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 INPAQ

	Freq. (MHz)	AMF Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.158	10.41	0.03	9.85	0.55	20.84	55.56	34.72	Average
2	0.158	10.41	0.03	9.85	20.24	40.53	65.56	25.03	QP
3	0.312	10.38	0.03	9.85	-3.55	16.71	49.93	33.22	Average
4	0.312	10.38	0.03	9.85	13.82	34.08	59.93	25.85	QP
5	0.579	10.37	0.03	9.85	5.15	25.40	46.00	20.60	Average
6	0.579	10.37	0.03	9.85	12.09	32.34	56.00	23.66	QP
7	16.398	10.98	0.18	9.92	19.08	40.16	50.00	9.84	Average
8	16.398	10.98	0.18	9.92	25.38	46.46	60.00	13.54	QP
9	22.416	11.18	0.21	9.95	18.77	40.11	50.00	9.89	Average
10	22.416	11.18	0.21	9.95	24.01	45.35	60.00	14.65	QP
11	29.371	11.36	0.24	10.00	19.14	40.74	50.00	9.26	Average
12	29.371	11.36	0.24	10.00	24.54	46.14	60.00	13.86	QP

Remarks: 1. Emission Level= AMF Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/08/08	Temp./Hum.	27°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

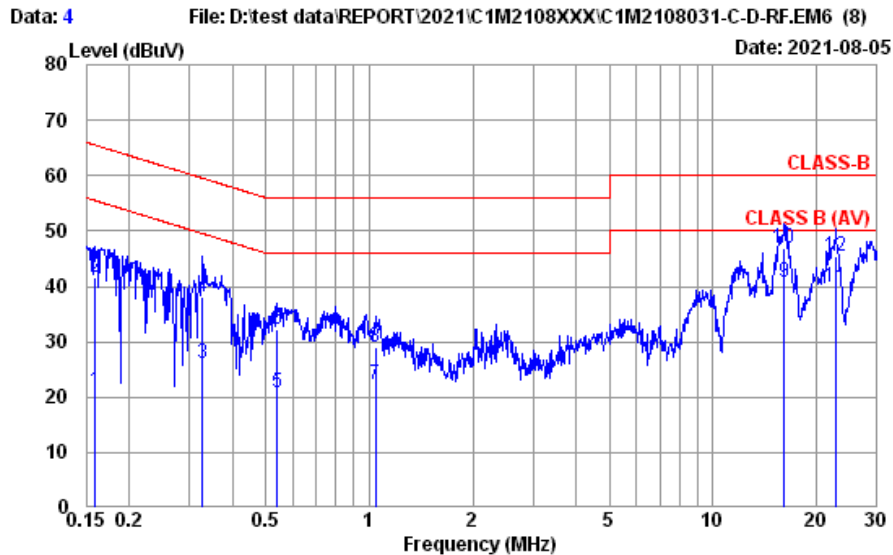


Site No. : No.8 Shielded Room Data No. : 4
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 27°C / 50% Engineer : Roy Hung
 EUT Model : 15Z95P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.159	10.40	0.03	9.85	0.85	21.13	55.52	34.39	Average
2	0.159	10.40	0.03	9.85	21.28	41.56	65.52	23.96	QP
3	0.327	10.38	0.03	9.85	5.90	26.16	49.53	23.37	Average
4	0.327	10.38	0.03	9.85	17.82	38.08	59.53	21.45	QP
5	0.541	10.37	0.03	9.85	0.52	20.77	46.00	25.23	Average
6	0.541	10.37	0.03	9.85	11.84	32.09	56.00	23.91	QP
7	1.043	10.38	0.04	9.85	1.93	22.20	46.00	23.80	Average
8	1.043	10.38	0.04	9.85	8.80	29.07	56.00	26.93	QP
9	16.140	10.71	0.18	9.92	20.05	40.86	50.00	9.14	Average
10	16.140	10.71	0.18	9.92	26.14	46.95	60.00	13.05	QP
11	22.775	10.80	0.21	9.96	18.96	39.93	50.00	10.07	Average
12	22.775	10.80	0.21	9.96	24.55	45.52	60.00	14.48	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Test Date	2021/08/08	Temp./Hum.	27°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

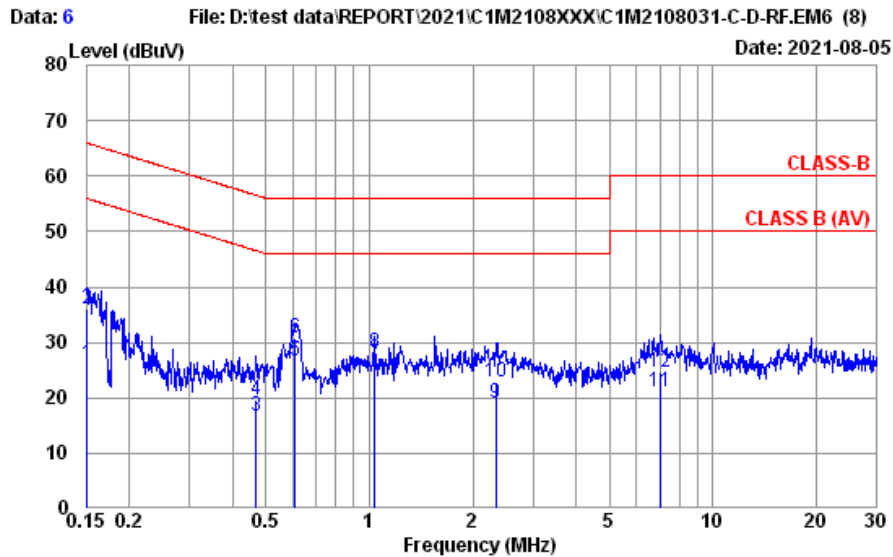


Site No. : No.8 Shielded Room Data No. : 6
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : NEUTRAL
 Environment : 27°C / 50% Engineer : Roy Hung
 EUT Model : 15Z95P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 LUXSHARE

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.41	0.03	9.85	5.74	26.03	55.96	29.93	Average
2	0.151	10.41	0.03	9.85	15.85	36.14	65.96	29.82	QP
3	0.469	10.37	0.03	9.85	-3.66	16.59	46.54	29.95	Average
4	0.469	10.37	0.03	9.85	-0.49	19.76	56.54	36.78	QP
5	0.608	10.37	0.03	9.85	6.43	26.68	46.00	19.32	Average
6	0.608	10.37	0.03	9.85	10.61	30.86	56.00	25.14	QP
7	1.037	10.38	0.04	9.85	5.87	26.14	46.00	19.86	Average
8	1.037	10.38	0.04	9.85	7.98	28.25	56.00	27.75	QP
9	2.334	10.42	0.07	9.86	-1.43	18.92	46.00	27.08	Average
10	2.334	10.42	0.07	9.86	2.42	22.77	56.00	33.23	QP
11	7.025	10.59	0.12	9.87	0.64	21.22	50.00	28.78	Average
12	7.025	10.59	0.12	9.87	3.98	24.56	60.00	35.44	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/08/08	Temp./Hum.	27°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

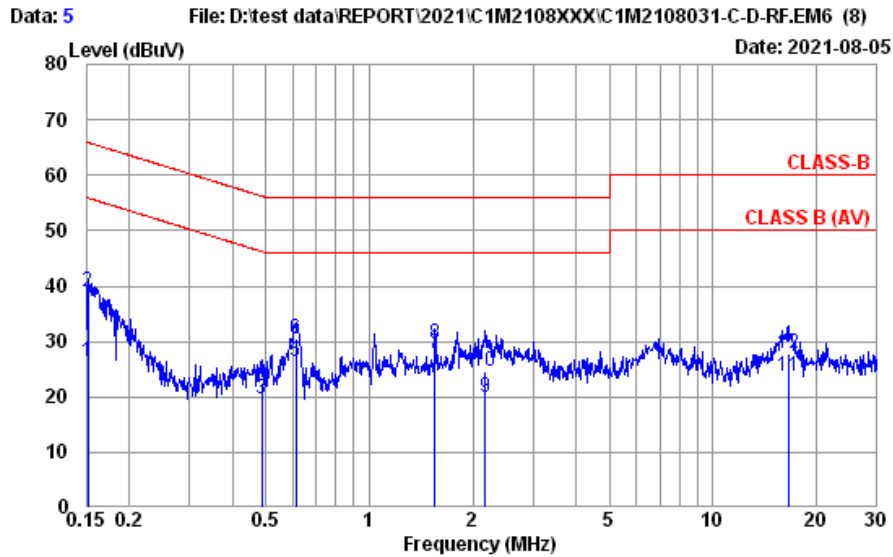

Site No. : No.8 Shielded Room Data No. : 5
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LIIE
 Environment : 27°C / 50% Engineer : Roy Hung
 EUT Model : 15295P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 LUXSHARE

	Freq. (MHz)	AMF Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	6.05	26.33	55.91	29.58	Average
2	0.152	10.40	0.03	9.85	18.63	38.91	65.91	27.00	QP
3	0.486	10.37	0.03	9.85	-0.74	19.51	46.23	26.72	Average
4	0.486	10.37	0.03	9.85	2.36	22.61	56.23	33.62	QP
5	0.611	10.37	0.03	9.85	6.09	26.34	46.00	19.66	Average
6	0.611	10.37	0.03	9.85	10.11	30.36	56.00	25.64	QP
7	1.552	10.39	0.05	9.86	7.51	27.81	46.00	18.19	Average
8	1.552	10.39	0.05	9.86	9.35	29.65	56.00	26.35	QP
9	2.178	10.40	0.06	9.86	-0.49	19.83	46.00	26.17	Average
10	2.178	10.40	0.06	9.86	4.18	24.50	56.00	31.50	QP
11	16.661	10.71	0.18	9.92	3.01	23.82	50.00	26.18	Average
12	16.661	10.71	0.18	9.92	7.17	27.98	60.00	32.02	QP

Remarks: 1. Emission Level= AMF Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2021/08/09 ~ 13	Temp./Hum.	25 ~ 27°C/53 ~ 62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #1 (with INPAQ Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.820	20.89	0.49	28.37	31.97	24.98	40.00	15.02	Peak
163.860	15.45	1.12	27.85	39.81	28.53	43.50	14.97	Peak
299.660	18.87	1.58	27.50	35.53	28.48	46.00	17.52	Peak
576.110	23.79	2.32	28.91	30.57	27.77	46.00	18.23	Peak
810.850	25.54	2.84	28.65	30.43	30.16	46.00	15.84	Peak
995.150	26.98	3.28	28.13	28.79	30.92	54.00	23.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	21.46	0.48	28.37	44.99	38.56	40.00	1.44	Peak
114.390	17.46	0.92	28.08	40.59	30.89	43.50	12.61	Peak
250.190	18.03	1.42	27.60	37.34	29.19	46.00	16.81	Peak
593.570	23.96	2.36	28.94	29.18	26.56	46.00	19.44	Peak
795.330	25.43	2.81	28.68	29.88	29.44	46.00	16.56	Peak
968.960	26.77	3.21	28.20	28.79	30.57	54.00	23.43	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	21.46	0.48	28.37	32.66	26.23	40.00	13.77	Peak
159.980	15.62	1.10	27.86	39.16	28.02	43.50	15.48	Peak
299.660	18.87	1.58	27.50	35.53	28.48	46.00	17.52	Peak
580.960	23.83	2.33	28.92	29.33	26.57	46.00	19.43	Peak
762.350	25.16	2.74	28.74	30.18	29.34	46.00	16.66	Peak
990.300	26.93	3.26	28.15	28.99	31.03	54.00	22.97	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.820	20.89	0.49	28.37	43.67	36.68	40.00	3.32	Peak
119.240	17.81	0.94	28.05	40.22	30.92	43.50	12.58	Peak
250.190	18.03	1.42	27.60	37.06	28.91	46.00	17.09	Peak
521.790	23.17	2.18	28.82	29.81	26.34	46.00	19.66	Peak
729.370	24.86	2.67	28.82	34.00	32.71	46.00	13.29	Peak
996.120	26.98	3.28	28.13	29.01	31.14	54.00	22.86	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

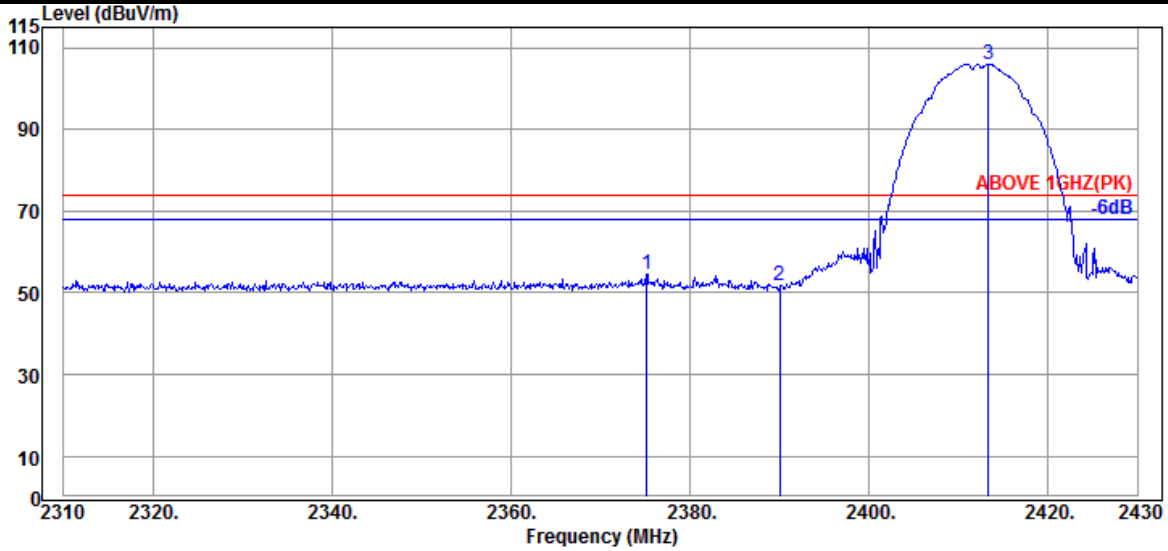

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.160	31.97	7.94	34.53	49.25	54.63	74.00	19.37	Peak
2390.040	31.89	7.95	34.54	46.51	51.81	74.00	22.19	Peak
@ 2413.320	31.94	7.96	34.54	100.62	105.98	---	---	Peak

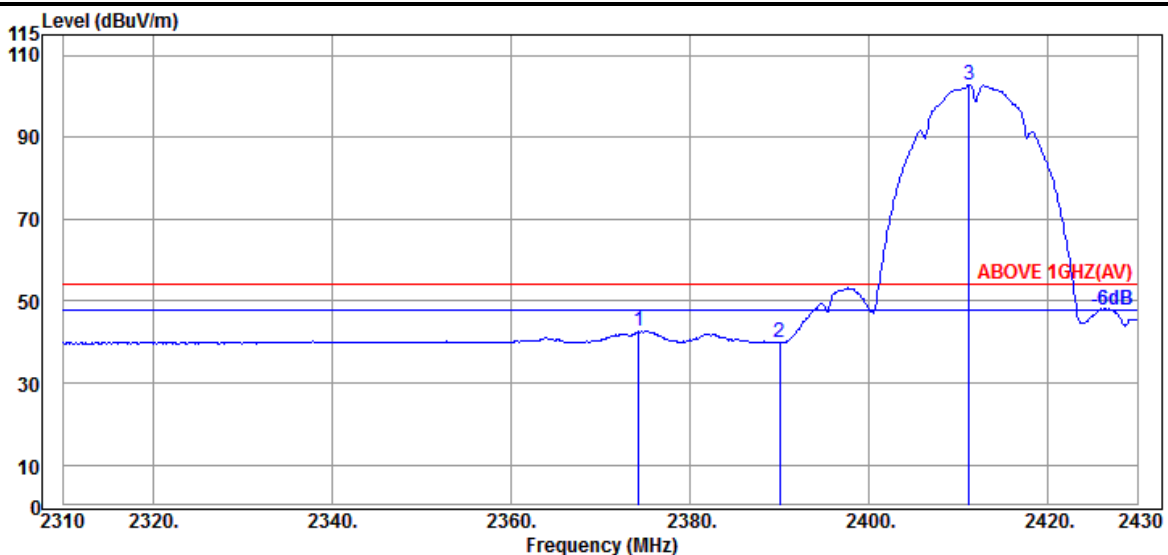


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.320	31.97	7.94	34.53	37.28	42.66	54.00	11.34	Average
2390.040	31.89	7.95	34.54	34.62	39.92	54.00	14.08	Average
@ 2411.160	31.87	7.96	34.54	97.47	102.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

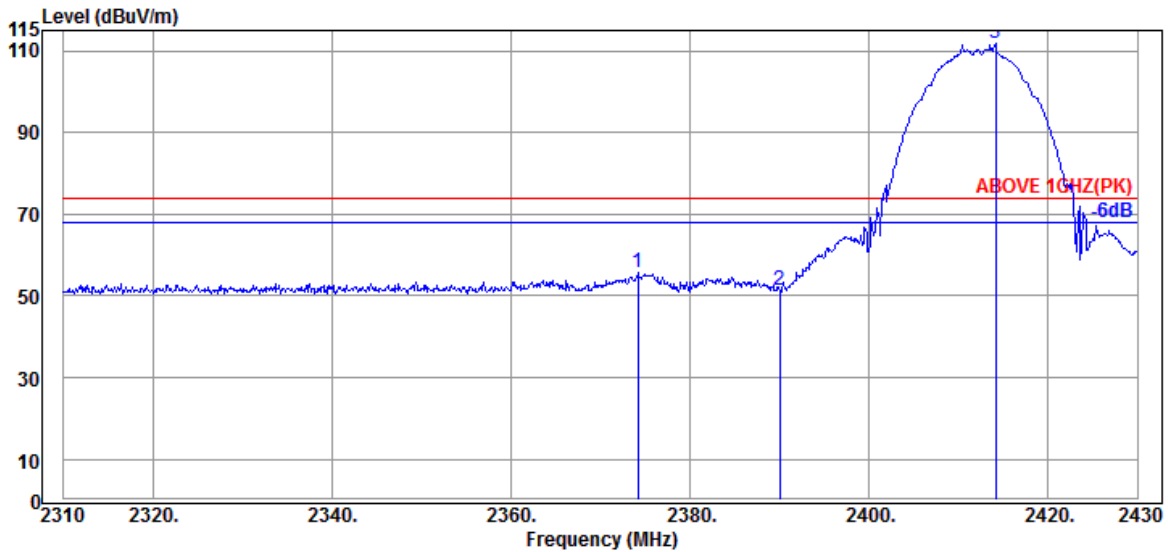

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.200	31.97	7.94	34.53	50.22	55.60	74.00	18.40	Peak
2390.040	31.89	7.95	34.54	46.25	51.55	74.00	22.45	Peak
@ 2414.160	31.94	7.96	34.54	106.31	111.67	---	---	Peak

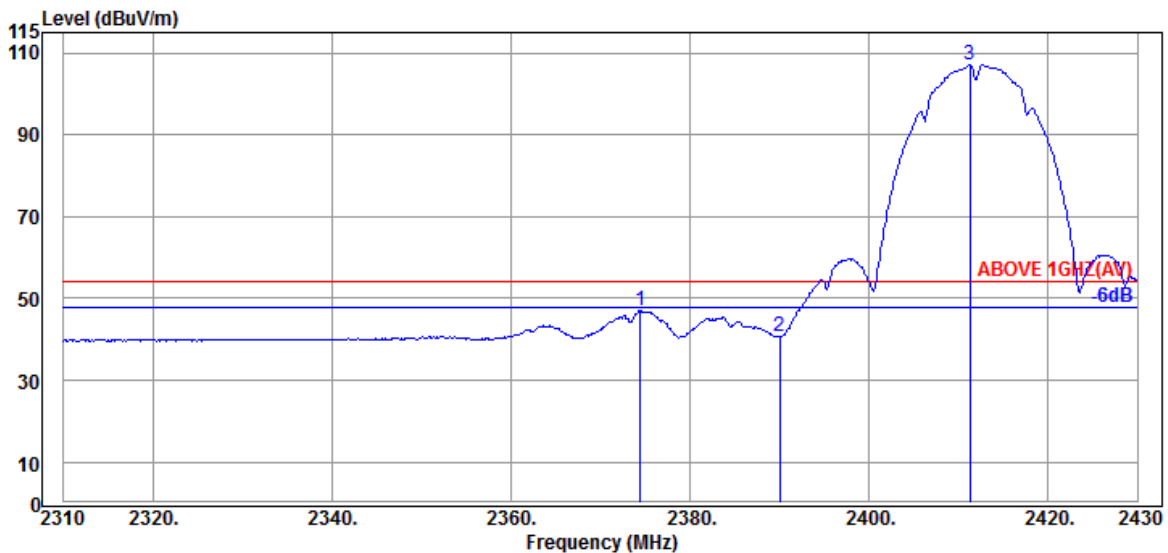


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.440	31.97	7.94	34.53	41.74	47.12	54.00	6.88	Average
2390.040	31.89	7.95	34.54	35.22	40.52	54.00	13.48	Average
@ 2411.280	31.94	7.96	34.54	101.70	107.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

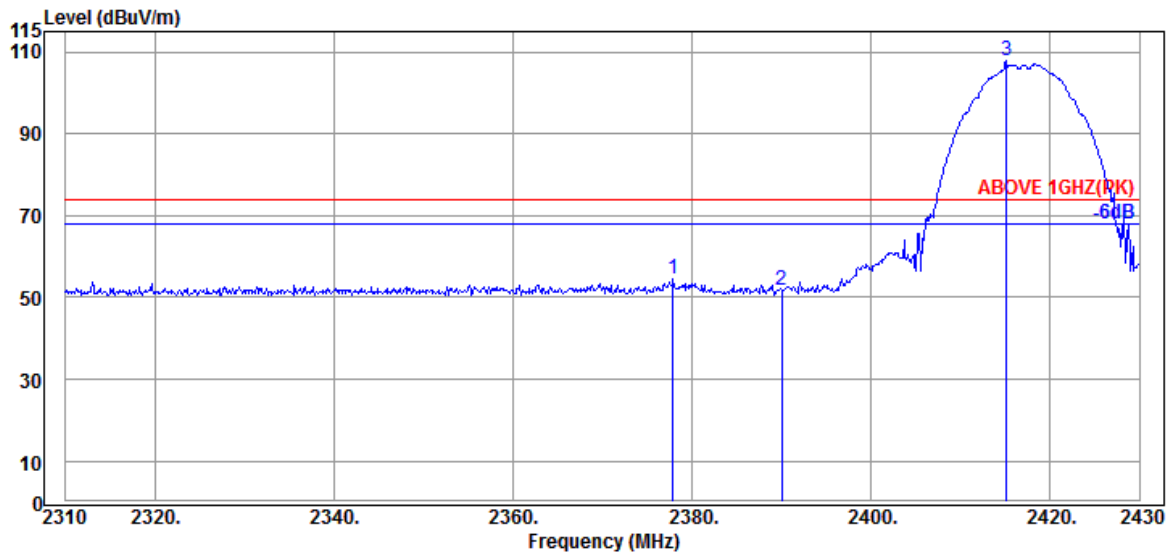

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.920	31.93	7.95	34.53	49.08	54.43	74.00	19.57	Peak
2390.040	31.89	7.95	34.54	46.36	51.66	74.00	22.34	Peak
@ 2415.120	31.94	7.96	34.54	102.69	108.05	---	---	Peak

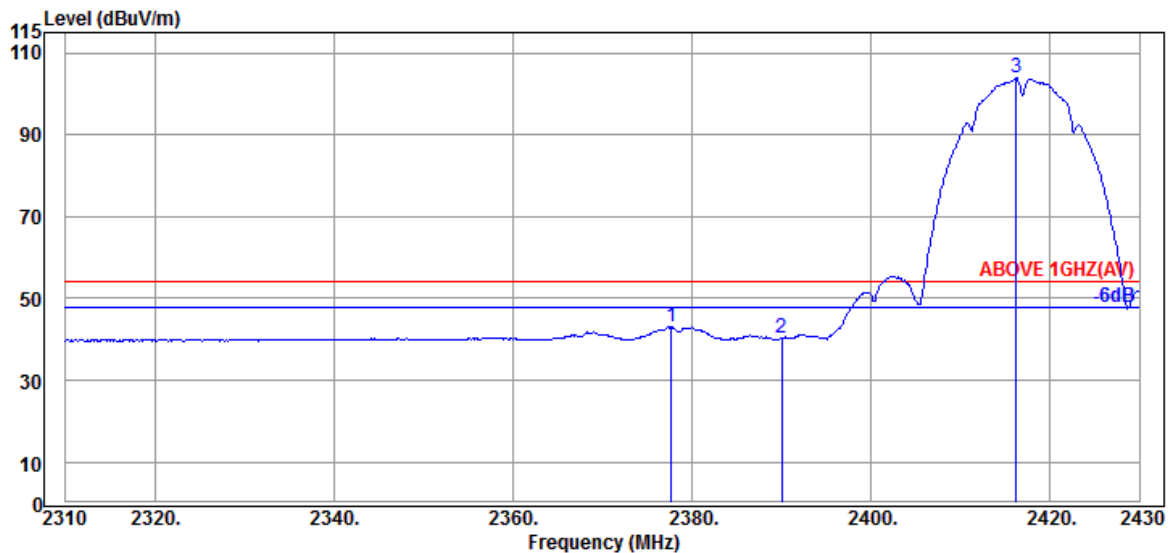


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.680	31.93	7.95	34.53	37.68	43.03	54.00	10.97	Average
2390.040	31.89	7.95	34.54	34.95	40.25	54.00	13.75	Average
@ 2416.200	31.94	7.96	34.54	98.45	103.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

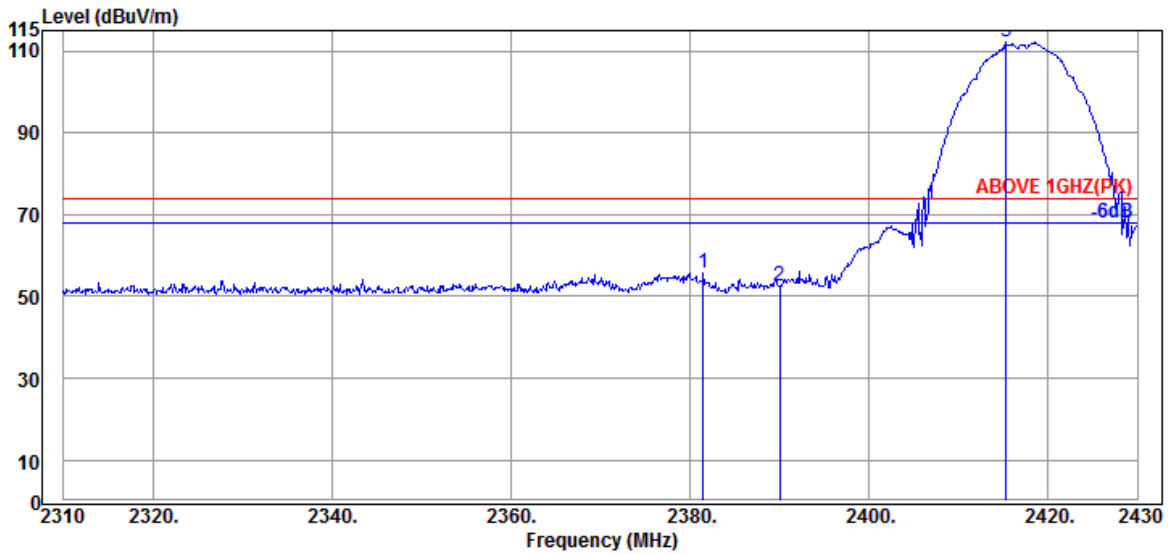

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.520	31.93	7.95	34.53	50.30	55.65	74.00	18.35	Peak
2390.040	31.89	7.95	34.54	47.36	52.66	74.00	21.34	Peak
@ 2415.360	31.94	7.96	34.54	106.92	112.28	---	---	Peak

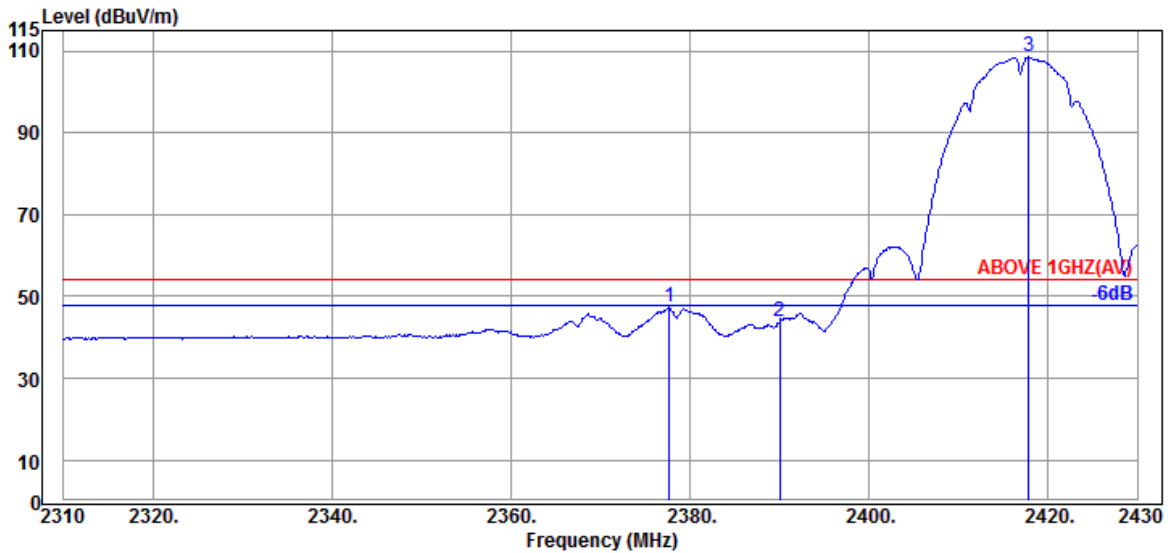


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.680	31.93	7.95	34.53	41.93	47.28	54.00	6.72	Average
2390.040	31.89	7.95	34.54	38.62	43.92	54.00	10.08	Average
@ 2417.880	31.94	7.96	34.54	103.17	108.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

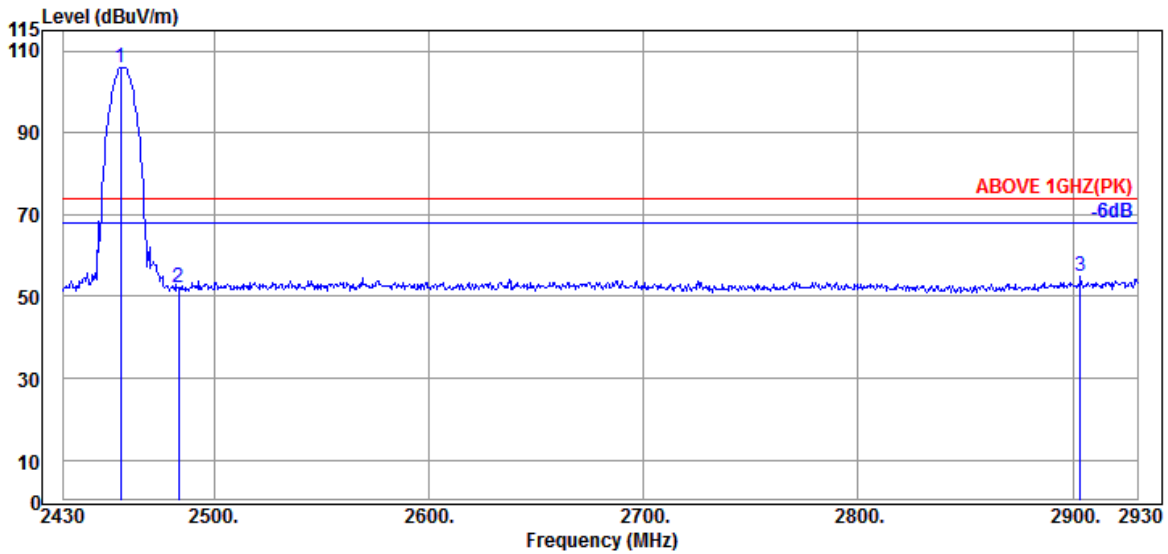

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	32.30	7.98	34.55	100.14	105.87	---	---	Peak
2483.500	32.30	7.99	34.55	46.35	52.09	74.00	21.91	Peak
2903.500	32.77	8.18	34.64	48.56	54.87	74.00	19.13	Peak

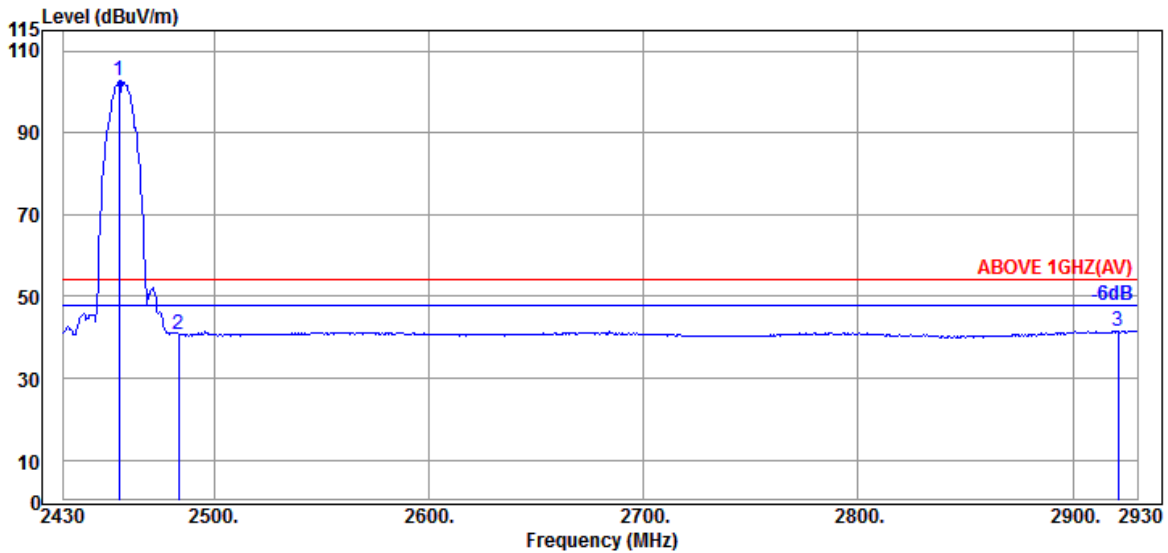


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	96.97	102.70	---	---	Average
2483.500	32.30	7.99	34.55	35.13	40.87	54.00	13.13	Average
2921.000	32.90	8.19	34.64	35.10	41.55	54.00	12.45	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

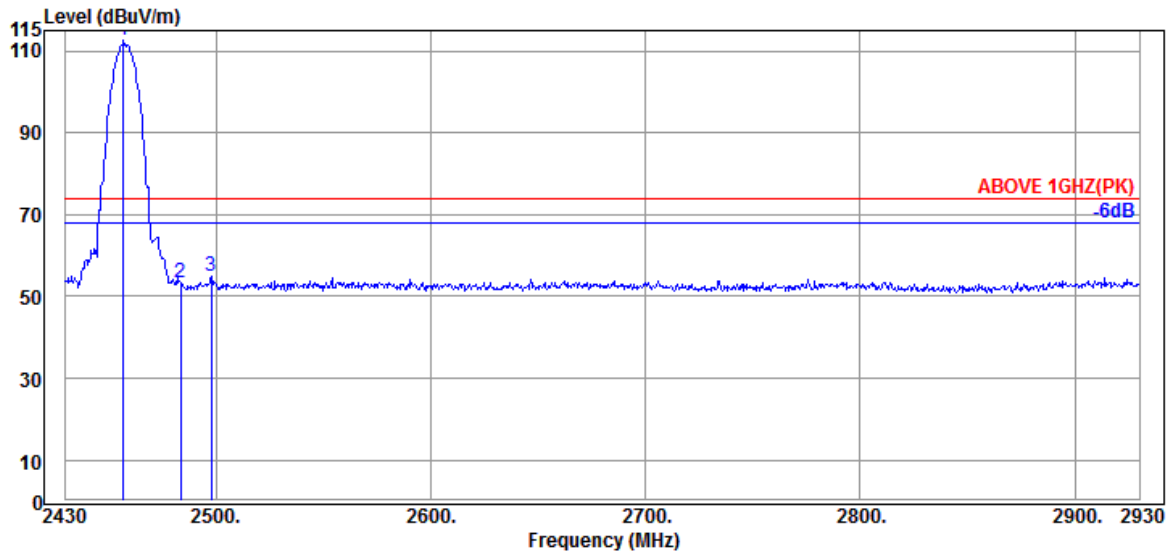

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.000	32.30	7.98	34.55	106.97	112.70	---	---	Peak
2483.500	32.30	7.99	34.55	47.45	53.19	74.00	20.81	Peak
2498.000	32.30	8.00	34.56	49.22	54.96	74.00	19.04	Peak

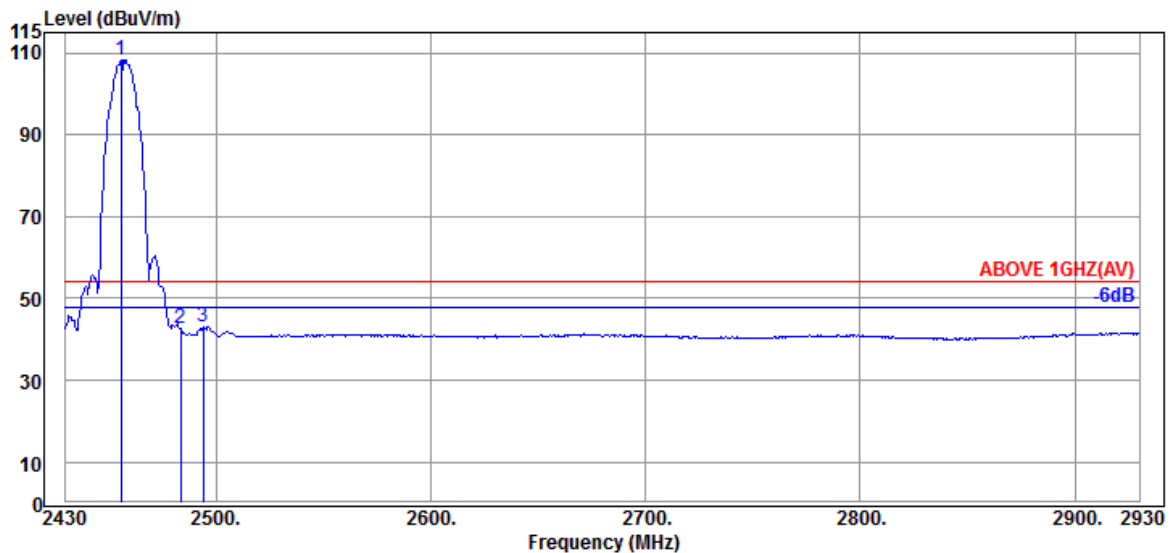


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	102.53	108.26	---	---	Average
2483.500	32.30	7.99	34.55	37.08	42.82	54.00	11.18	Average
2494.000	32.30	8.00	34.56	37.27	43.01	54.00	10.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

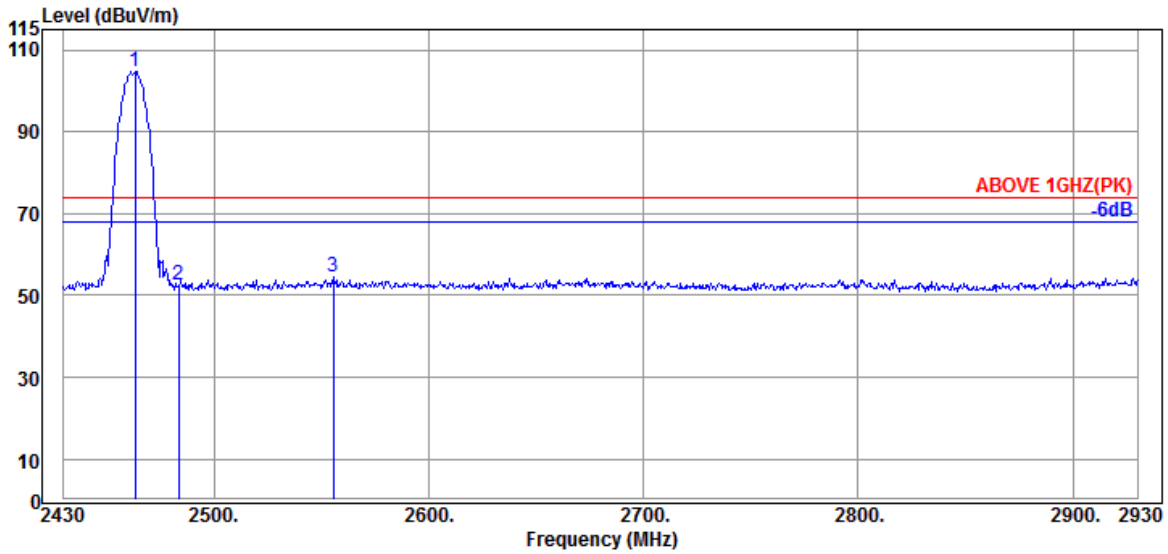

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	99.09	104.82	---	---	Peak
2483.500	32.30	7.99	34.55	46.73	52.47	74.00	21.53	Peak
2555.500	32.50	8.03	34.57	48.41	54.37	74.00	19.63	Peak

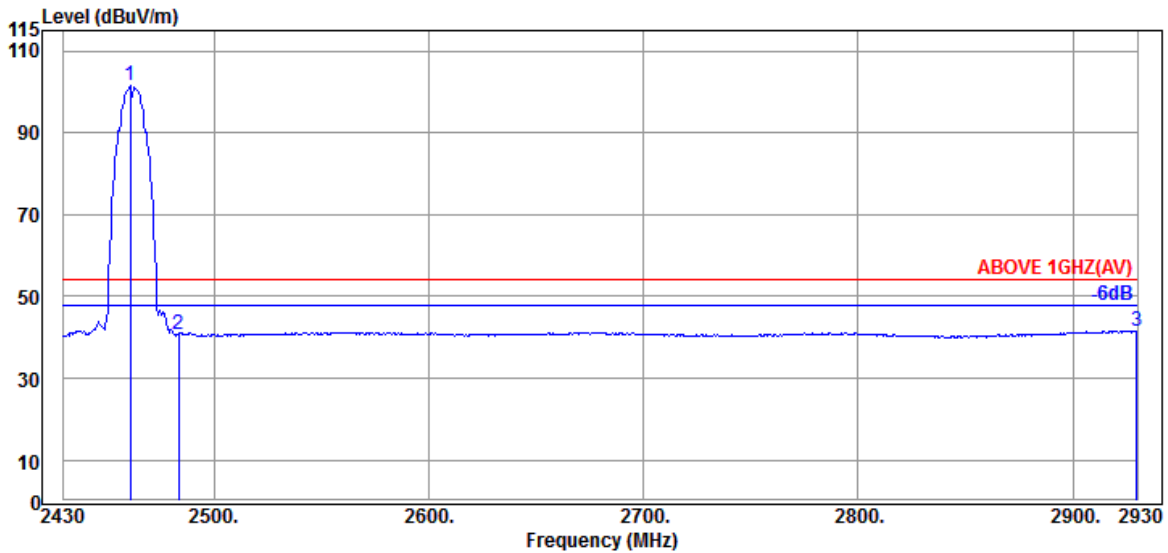


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	95.65	101.38	---	---	Average
2483.500	32.30	7.99	34.55	35.08	40.82	54.00	13.18	Average
2929.500	32.97	8.19	34.65	35.08	41.59	54.00	12.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

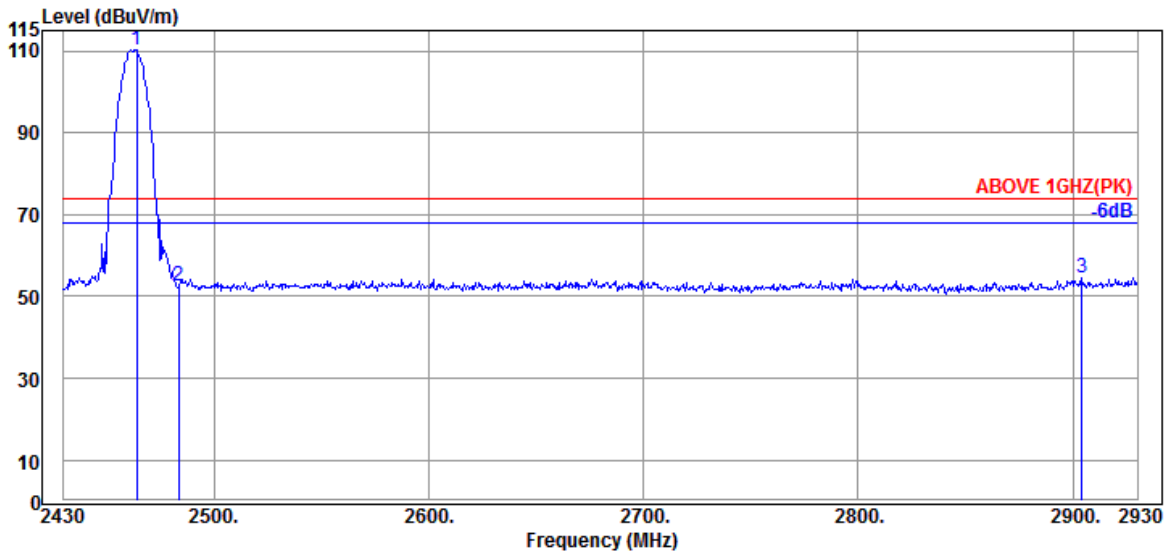

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.000	32.30	7.98	34.55	104.53	110.26	---	---	Peak
2483.500	32.30	7.99	34.55	46.93	52.67	74.00	21.33	Peak
2904.000	32.77	8.18	34.64	48.23	54.54	74.00	19.46	Peak

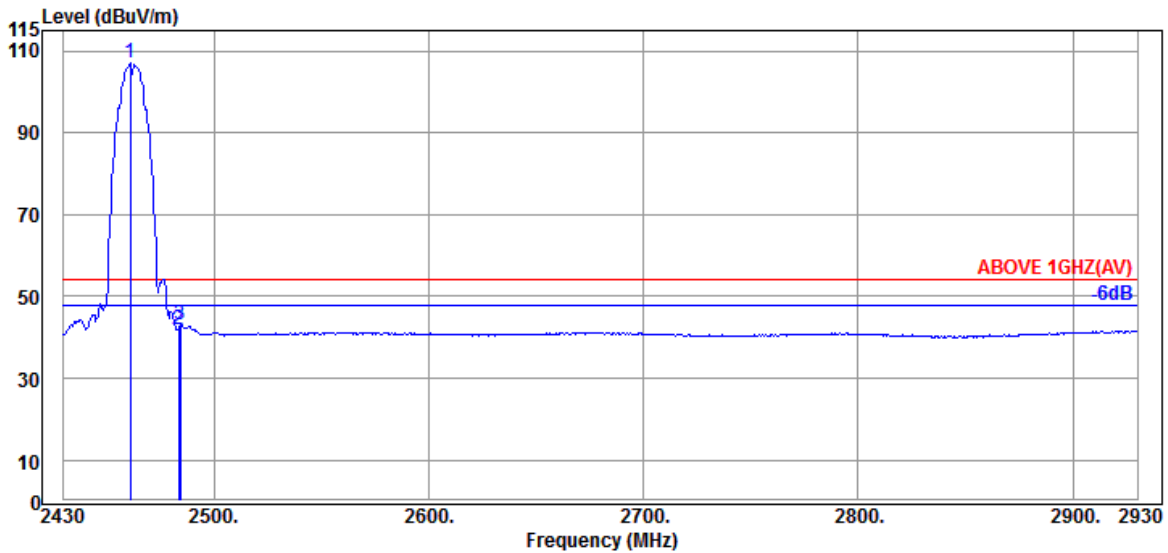


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	32.30	7.98	34.55	101.34	107.07	---	---	Average
2483.500	32.30	7.99	34.55	36.31	42.05	54.00	11.95	Average
2484.500	32.30	7.99	34.55	37.32	43.06	54.00	10.94	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

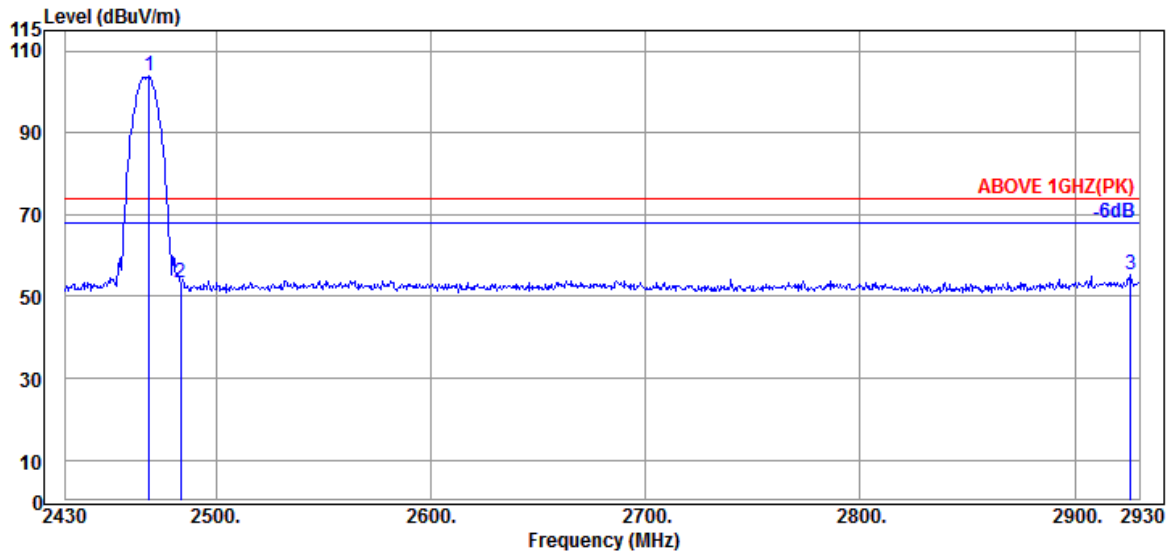

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	32.30	7.98	34.55	98.06	103.79	---	---	Peak
2483.500	32.30	7.99	34.55	47.71	53.45	74.00	20.55	Peak
2926.000	32.90	8.19	34.65	48.79	55.23	74.00	18.77	Peak

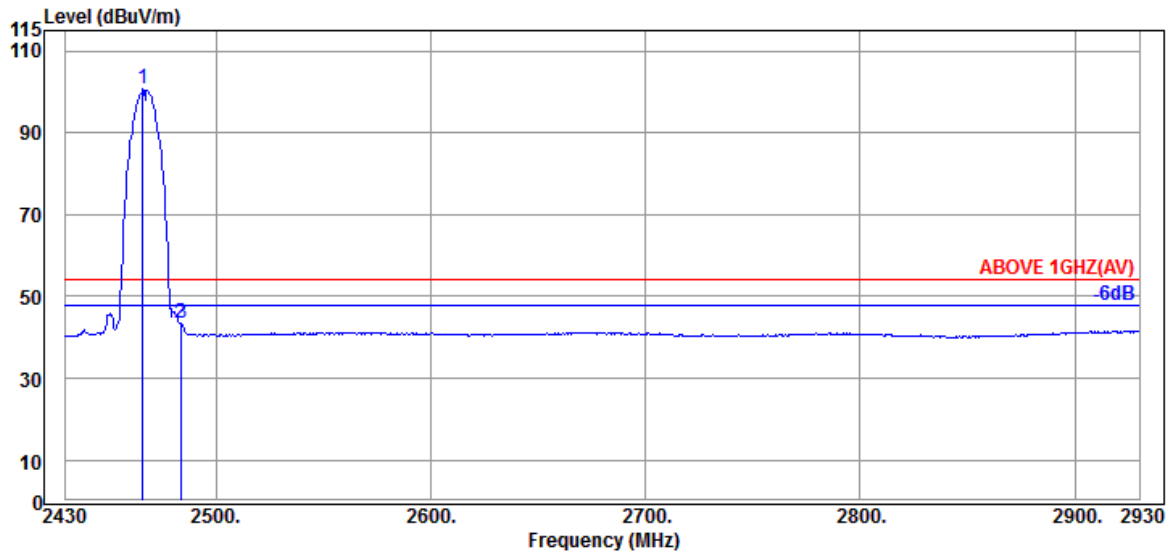


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	94.88	100.61	---	---	Average
2483.500	32.30	7.99	34.55	37.62	43.36	54.00	10.64	Average
2484.000	32.30	7.99	34.55	37.64	43.38	54.00	10.62	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

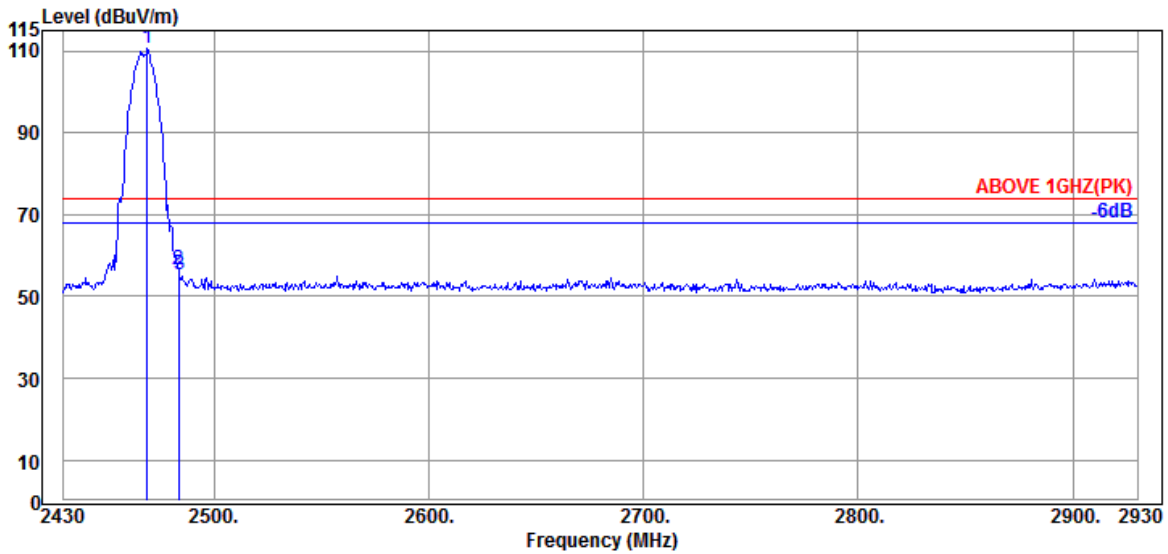

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.000	32.30	7.98	34.55	104.86	110.59	---	---	Peak
2483.500	32.30	7.99	34.55	50.91	56.65	74.00	17.35	Peak
2484.000	32.30	7.99	34.55	49.50	55.24	74.00	18.76	Peak

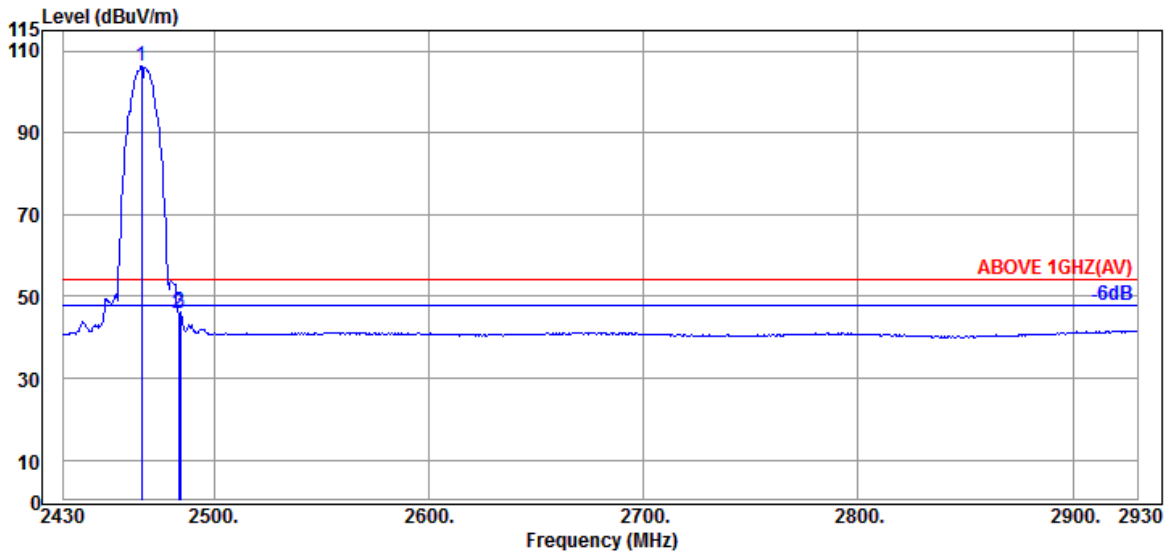


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.500	32.30	7.98	34.55	100.48	106.21	---	---	Average
2483.500	32.30	7.99	34.55	39.91	45.65	54.00	8.35	Average
2484.500	32.30	7.99	34.55	40.30	46.04	54.00	7.96	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

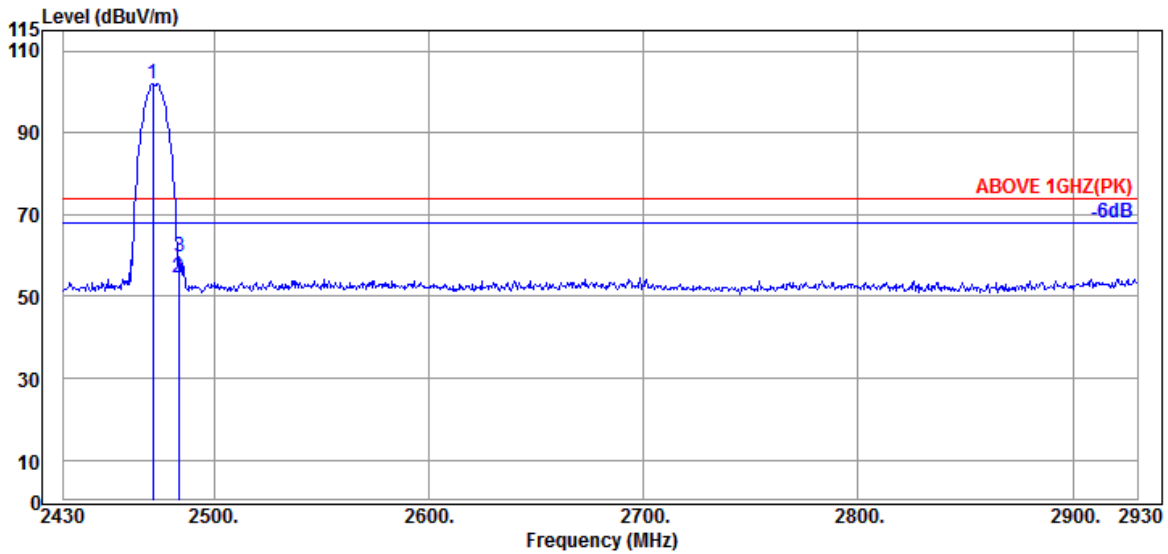

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	32.30	7.99	34.55	96.10	101.84	---	---	Peak
2483.500	32.30	7.99	34.55	48.68	54.42	74.00	19.58	Peak
2484.000	32.30	7.99	34.55	53.76	59.50	74.00	14.50	Peak

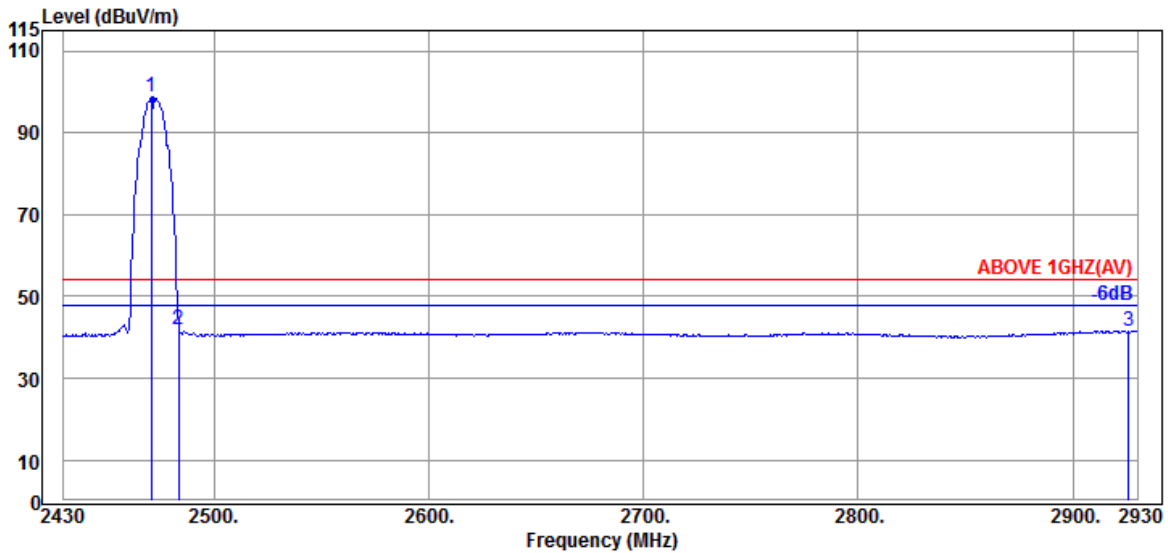


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	7.99	34.55	92.91	98.65	---	---	Average
2483.500	32.30	7.99	34.55	36.19	41.93	54.00	12.07	Average
2926.000	32.90	8.19	34.65	35.11	41.55	54.00	12.45	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

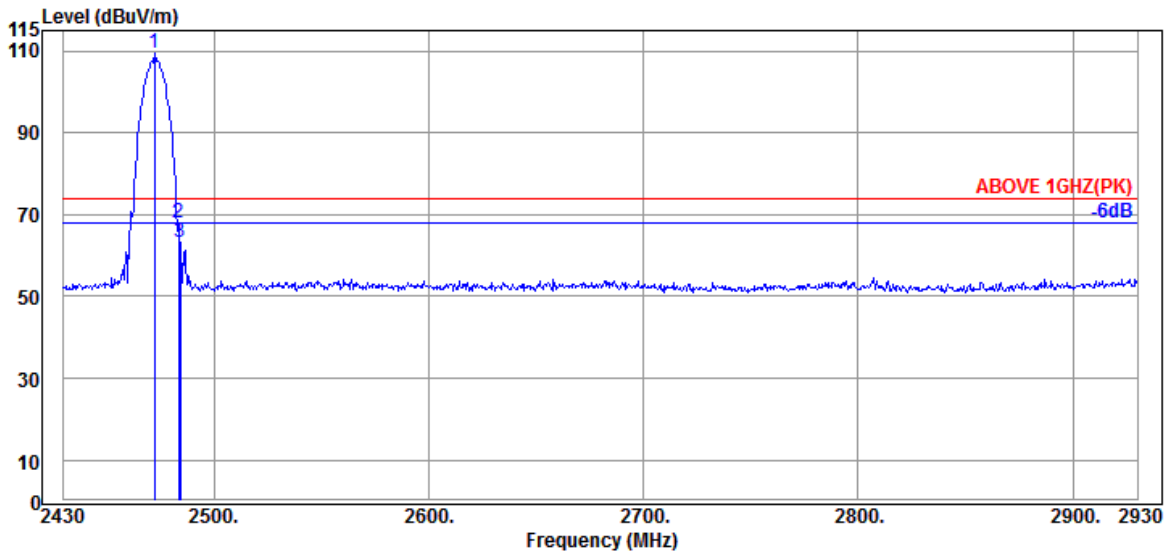

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.500	32.30	7.99	34.55	103.65	109.39	---	---	Peak
2483.500	32.30	7.99	34.55	62.07	67.81	74.00	6.19	Peak
2484.500	32.30	7.99	34.55	57.50	63.24	74.00	10.76	Peak

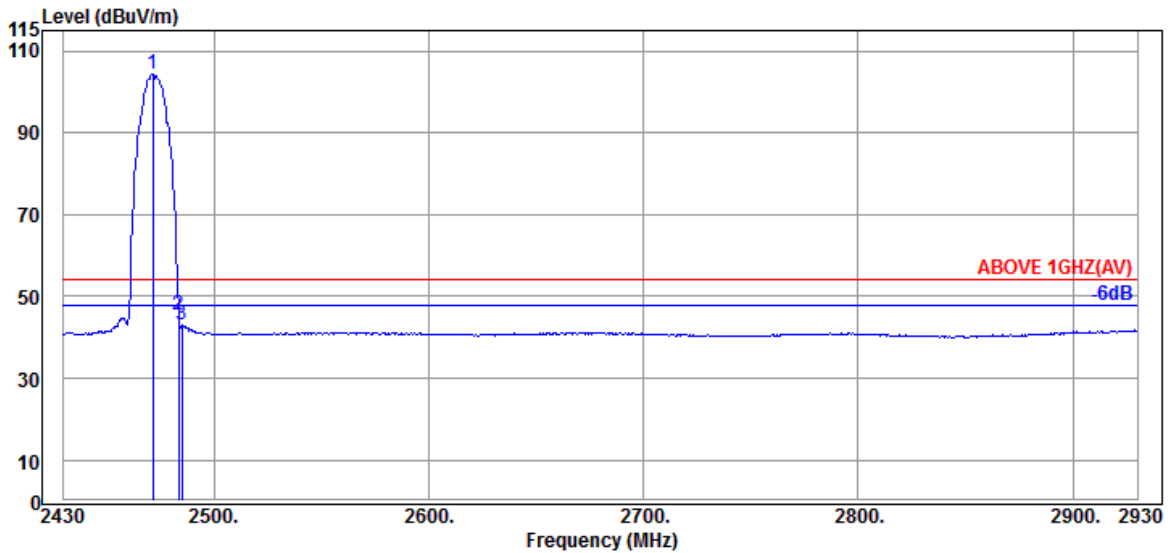


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.500	32.30	7.99	34.55	98.47	104.21	---	---	Average
2483.500	32.30	7.99	34.55	39.87	45.61	54.00	8.39	Average
2485.000	32.30	7.99	34.55	37.15	42.89	54.00	11.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

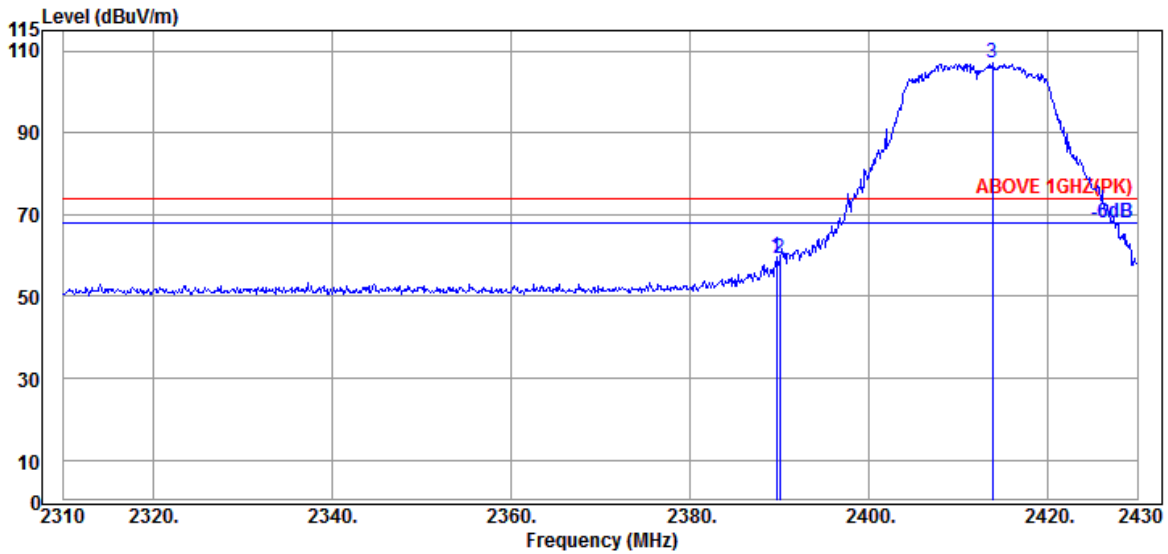

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	54.36	59.67	74.00	14.33	Peak
2390.040	31.89	7.95	34.54	54.04	59.34	74.00	14.66	Peak
@ 2413.800	31.94	7.96	34.54	101.60	106.96	---	---	Peak

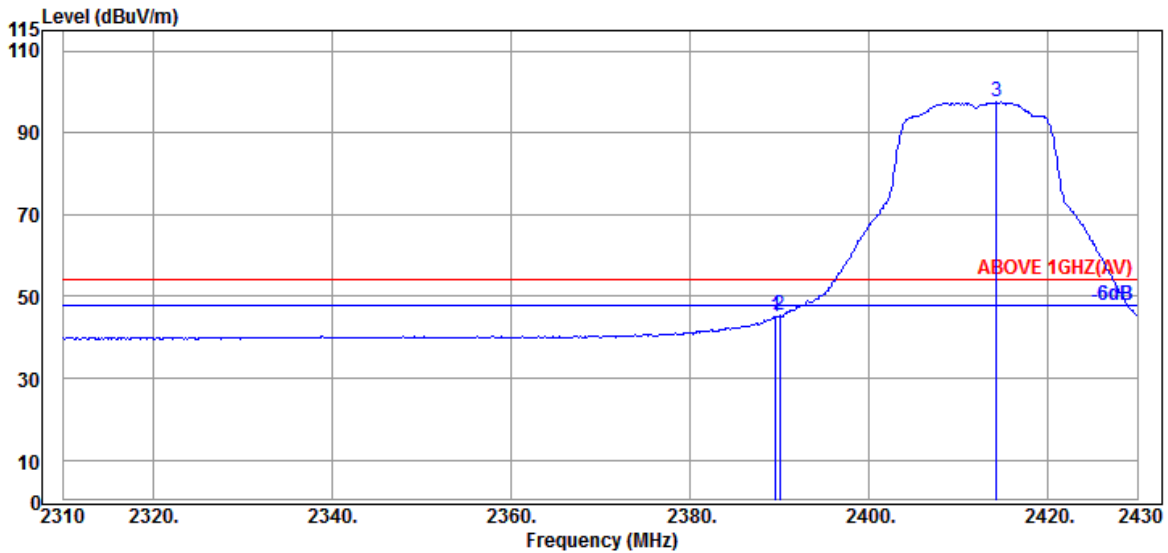


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	39.84	45.15	54.00	8.85	Average
2390.040	31.89	7.95	34.54	39.95	45.25	54.00	8.75	Average
@ 2414.280	31.94	7.96	34.54	92.14	97.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

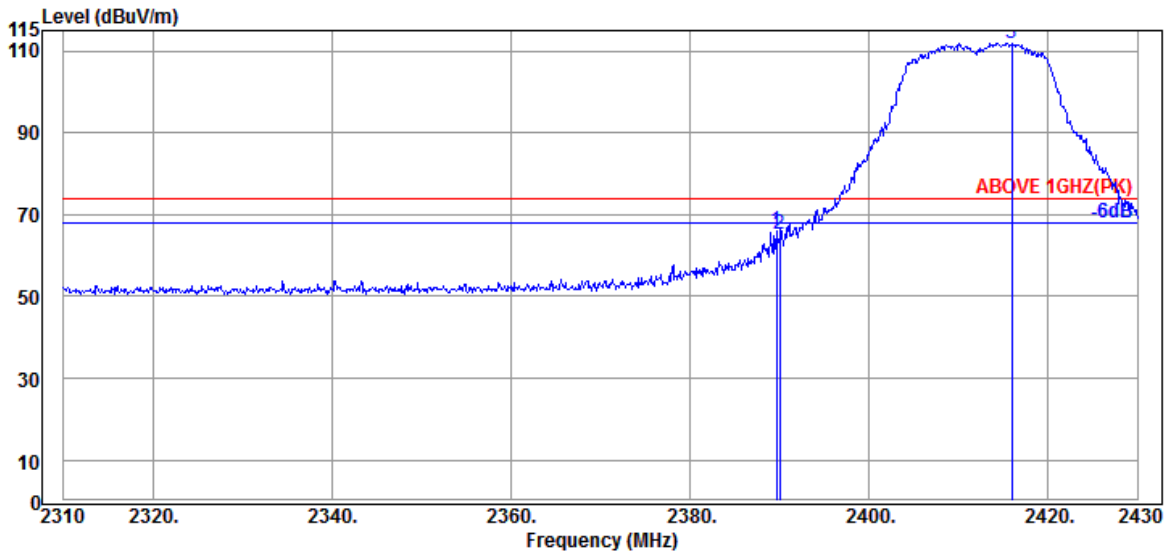

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	60.82	66.13	74.00	7.87	Peak
2390.040	31.89	7.95	34.54	59.74	65.04	74.00	8.96	Peak
@ 2415.960	31.94	7.96	34.54	106.57	111.93	---	---	Peak

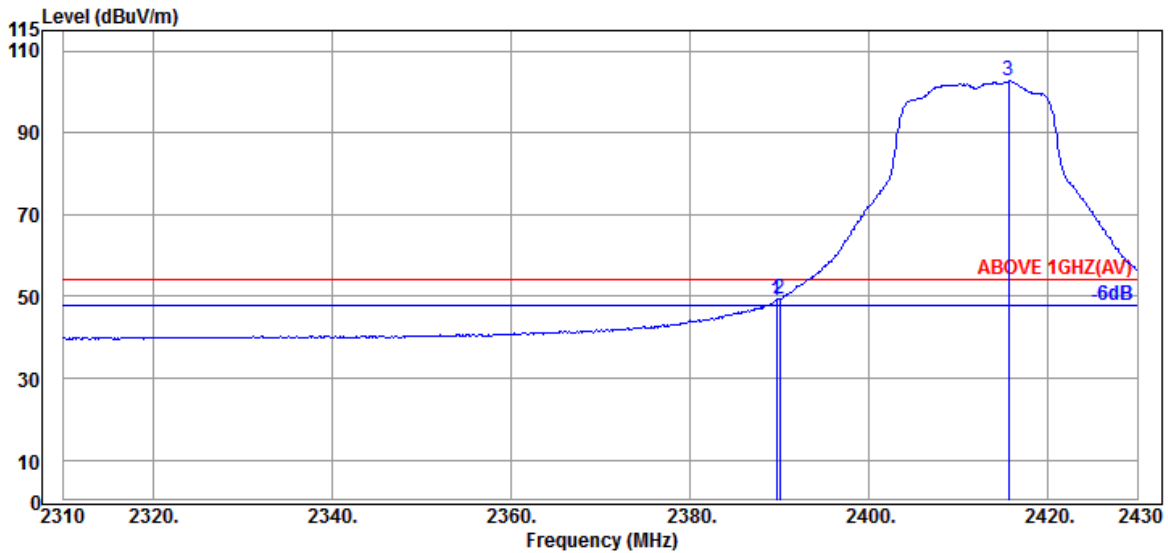


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	43.71	49.02	54.00	4.98	Average
2390.040	31.89	7.95	34.54	43.99	49.29	54.00	4.71	Average
@ 2415.600	31.94	7.96	34.54	97.27	102.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

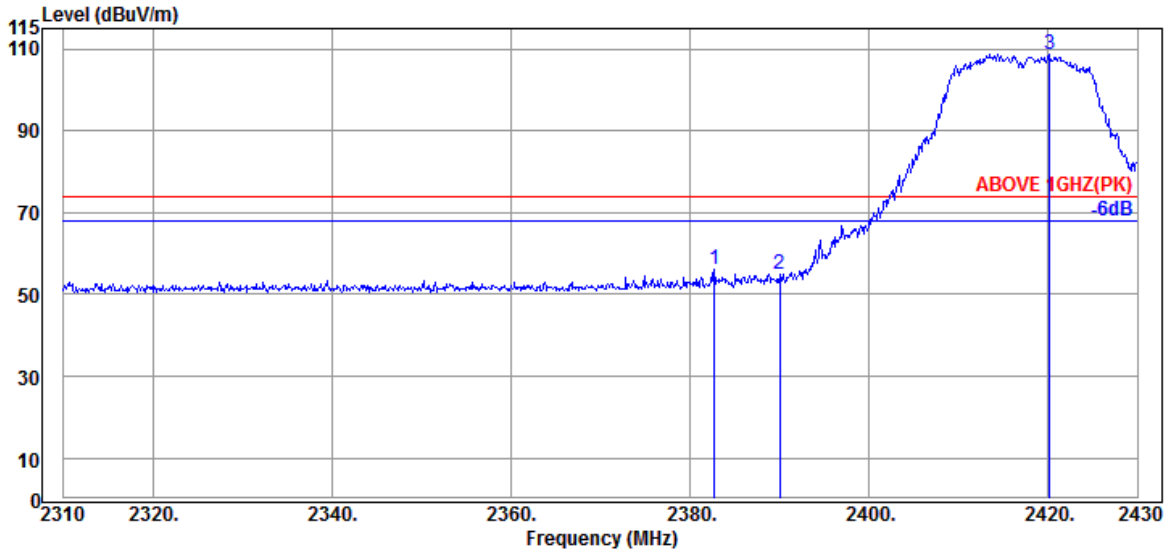

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.720	31.93	7.95	34.53	50.69	56.04	74.00	17.96	Peak
2390.040	31.89	7.95	34.54	49.58	54.88	74.00	19.12	Peak
@ 2420.160	32.01	7.96	34.54	103.27	108.70	---	---	Peak

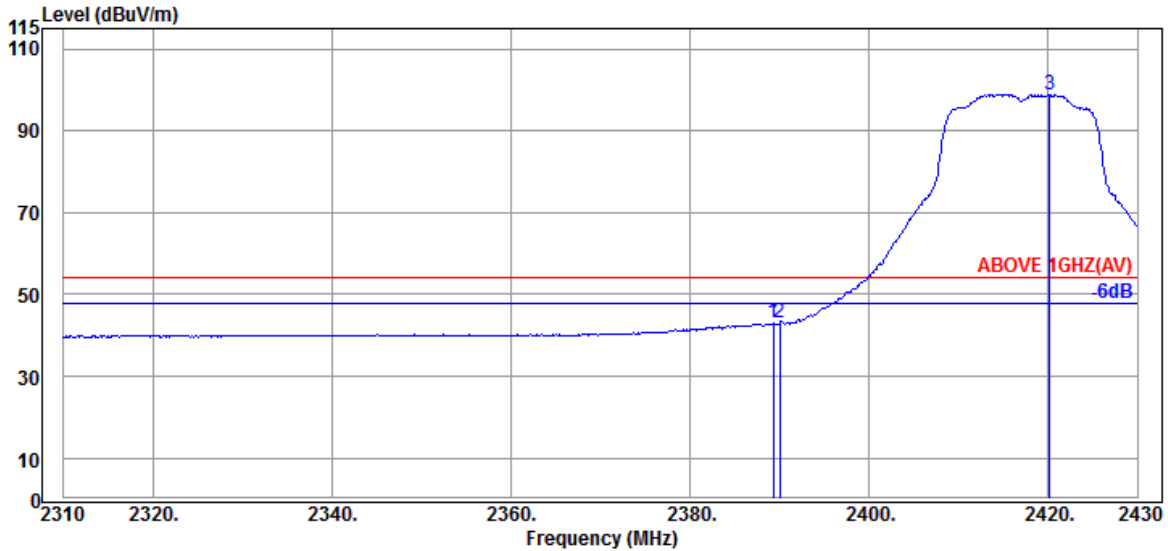


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	31.89	7.95	34.53	37.74	43.05	54.00	10.95	Average
2390.040	31.89	7.95	34.54	37.68	42.98	54.00	11.02	Average
@ 2420.160	32.01	7.96	34.54	93.56	98.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

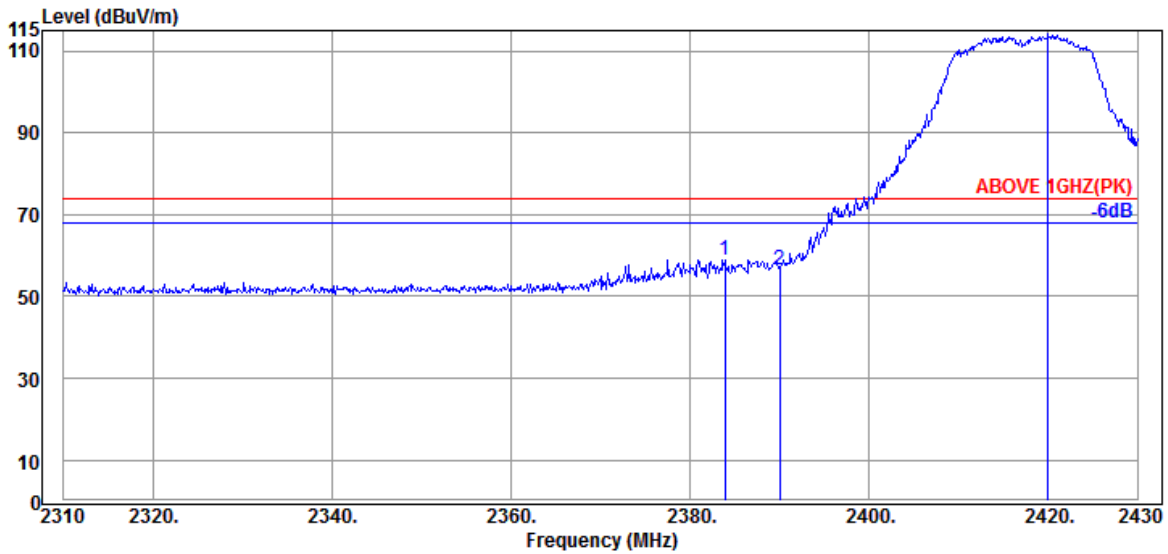

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.920	31.89	7.95	34.53	53.61	58.92	74.00	15.08	Peak
2390.040	31.89	7.95	34.54	51.40	56.70	74.00	17.30	Peak
@ 2420.040	32.01	7.96	34.54	108.61	114.04	---	---	Peak

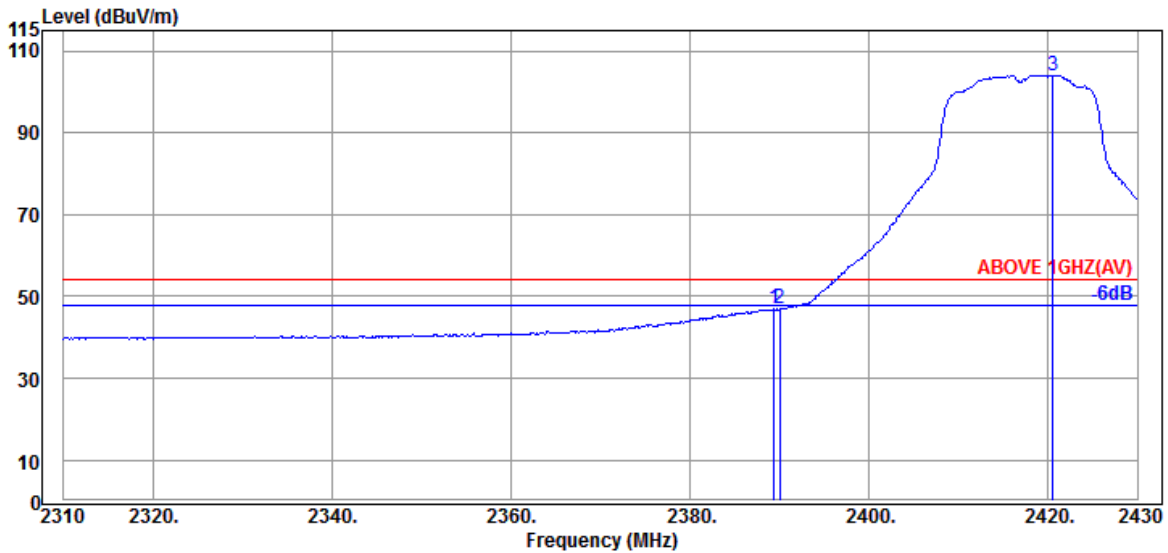


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	41.54	46.85	54.00	7.15	Average
2390.040	31.89	7.95	34.54	41.59	46.89	54.00	7.11	Average
@ 2420.520	32.01	7.96	34.54	98.67	104.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

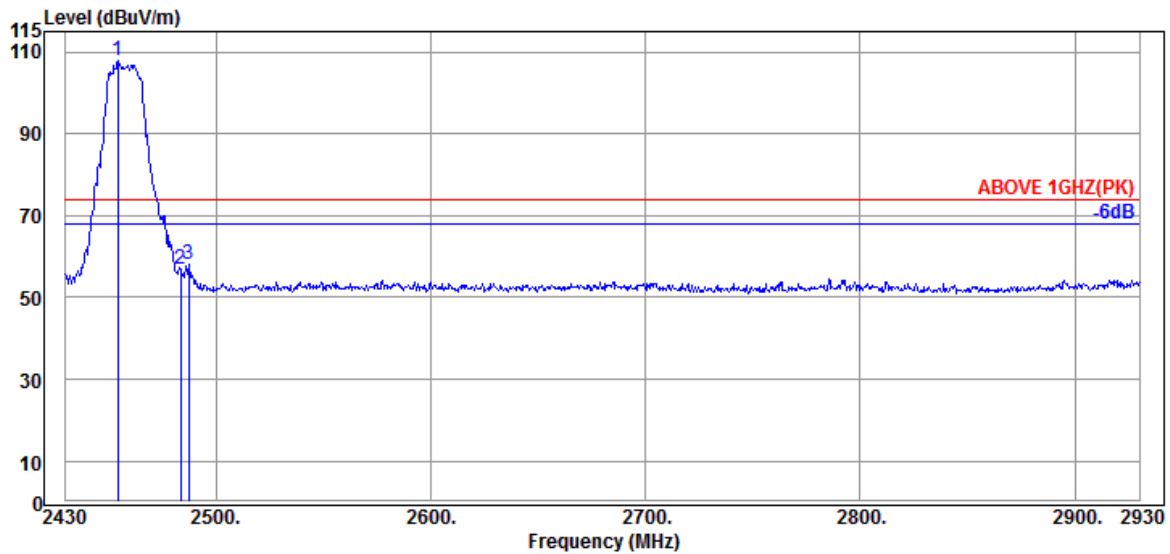

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	102.07	107.80	---	---	Peak
2483.500	32.30	7.99	34.55	51.08	56.82	74.00	17.18	Peak
2487.500	32.30	8.00	34.55	52.22	57.97	74.00	16.03	Peak

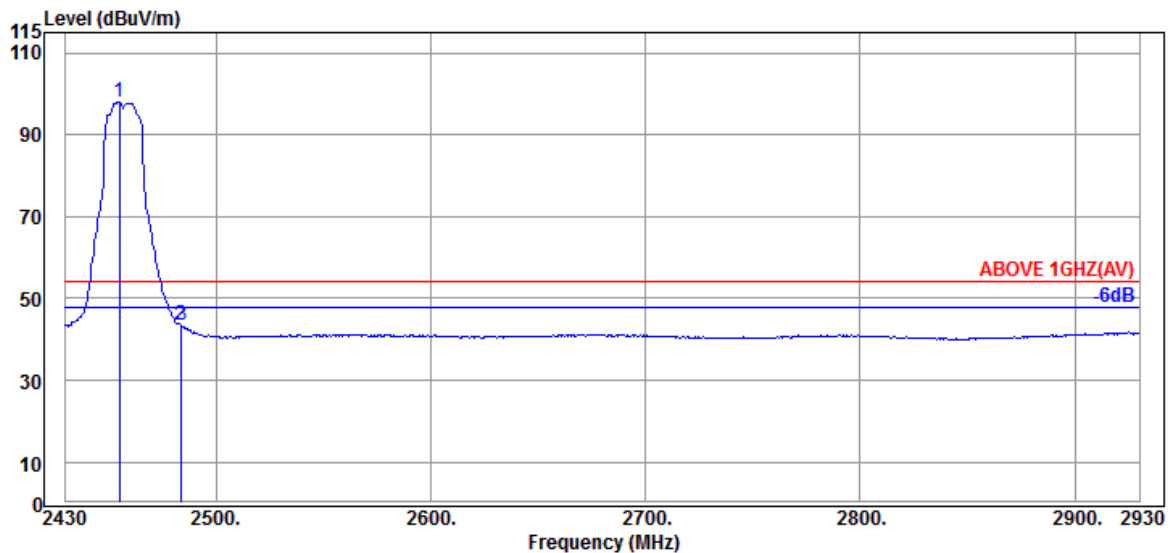


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	92.24	97.97	---	---	Average
2483.500	32.30	7.99	34.55	37.59	43.33	54.00	10.67	Average
2484.000	32.30	7.99	34.55	37.84	43.58	54.00	10.42	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

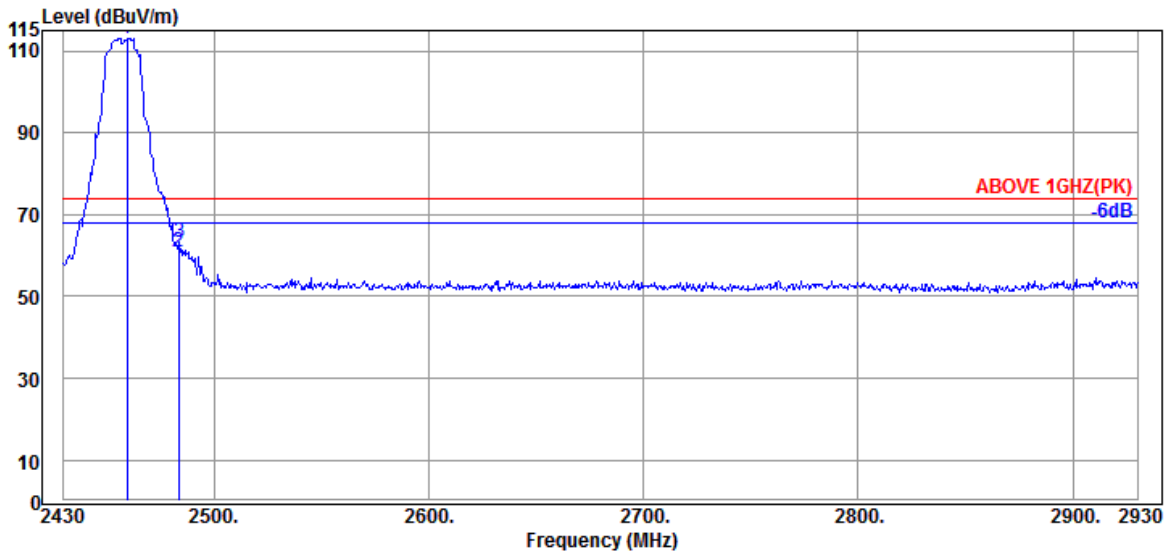

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.500	32.30	7.98	34.55	107.34	113.07	---	---	Peak
2483.500	32.30	7.99	34.55	55.23	60.97	74.00	13.03	Peak
2484.000	32.30	7.99	34.55	57.56	63.30	74.00	10.70	Peak

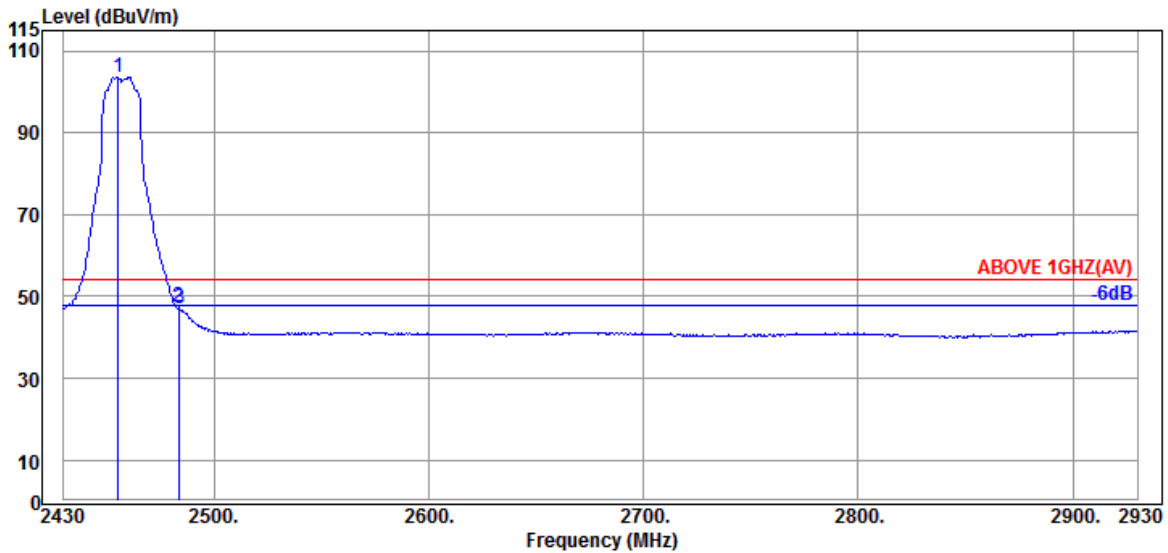


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.500	32.30	7.98	34.55	97.91	103.64	---	---	Average
2483.500	32.30	7.99	34.55	41.74	47.48	54.00	6.52	Average
2484.000	32.30	7.99	34.55	41.27	47.01	54.00	6.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

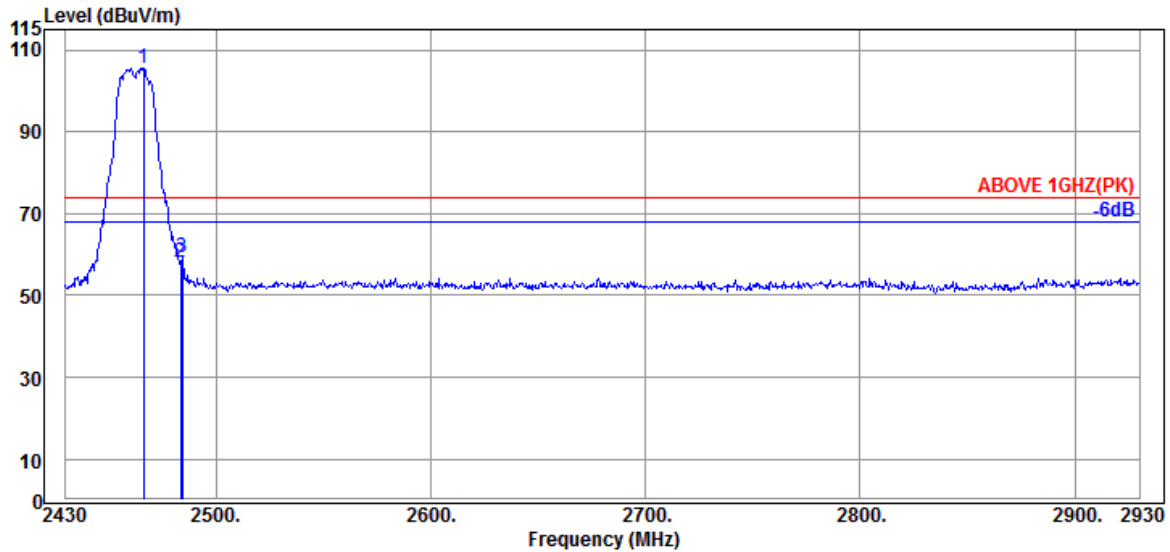

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	32.30	7.98	34.55	99.69	105.42	---	---	Peak
2483.500	32.30	7.99	34.55	52.34	58.08	74.00	15.92	Peak
2484.500	32.30	7.99	34.55	53.50	59.24	74.00	14.76	Peak

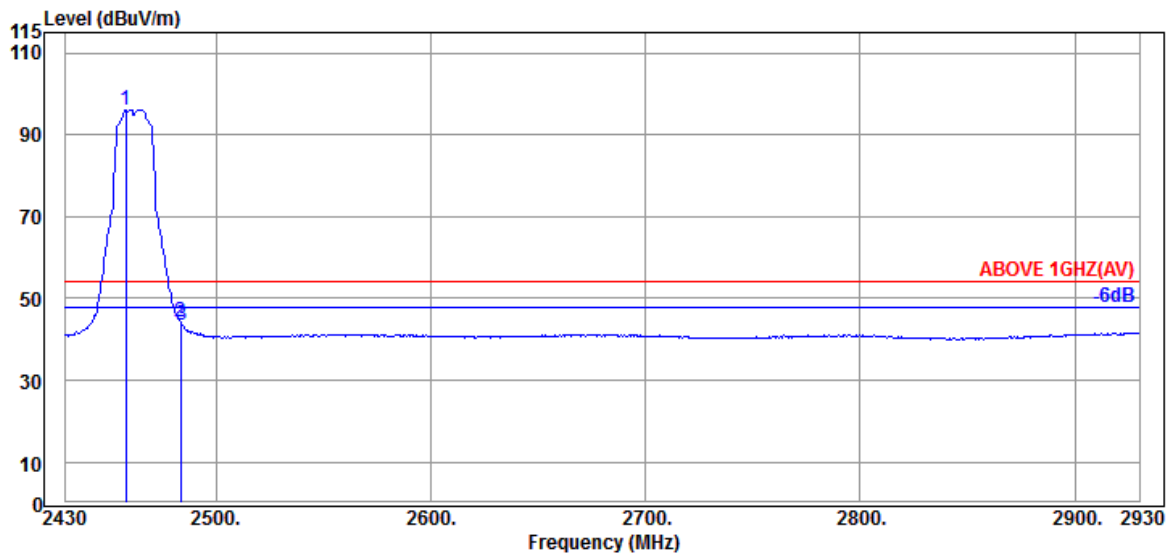


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	32.30	7.98	34.55	90.40	96.13	---	---	Average
2483.500	32.30	7.99	34.55	38.35	44.09	54.00	9.91	Average
2484.000	32.30	7.99	34.55	37.89	43.63	54.00	10.37	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

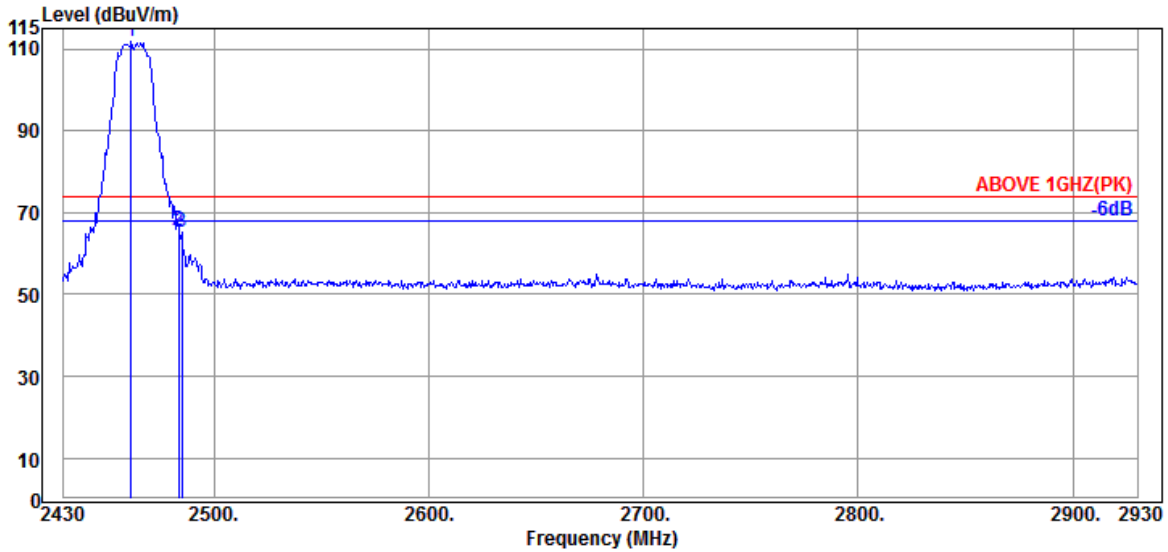

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.500	32.30	7.98	34.55	106.06	111.79	---	---	Peak
2483.500	32.30	7.99	34.55	59.86	65.60	74.00	8.40	Peak
2485.000	32.30	7.99	34.55	59.36	65.10	74.00	8.90	Peak

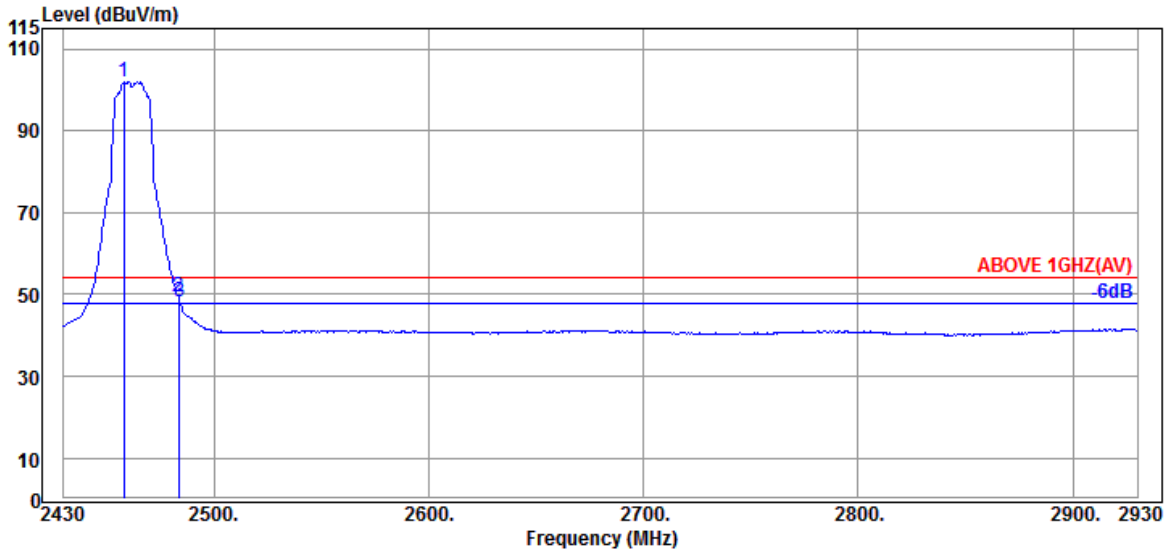


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.000	32.30	7.98	34.55	96.24	101.97	---	---	Average
2483.500	32.30	7.99	34.55	43.51	49.25	54.00	4.75	Average
2484.000	32.30	7.99	34.55	42.51	48.25	54.00	5.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

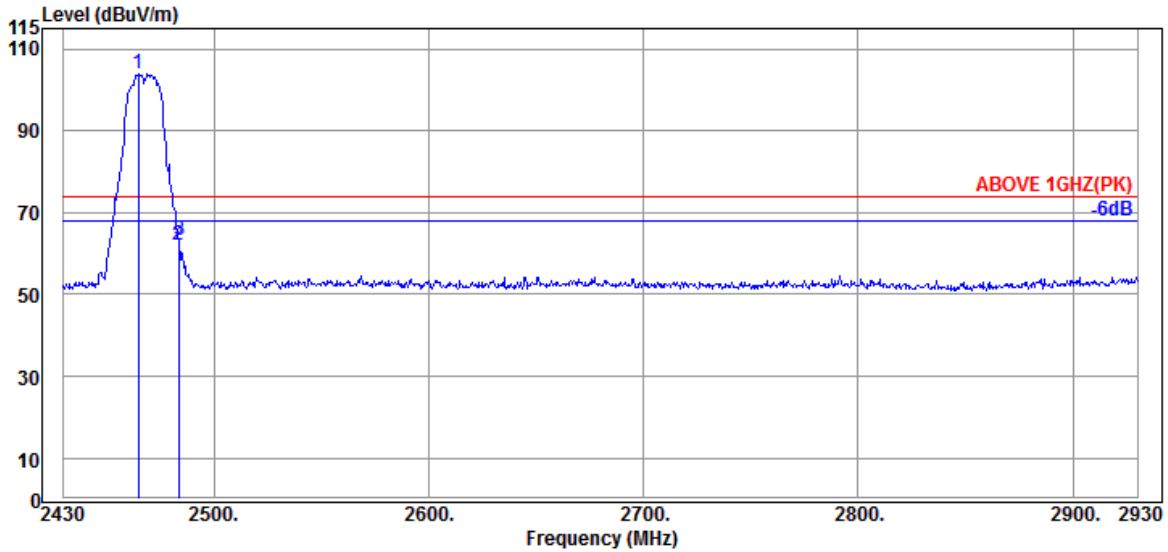

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	98.16	103.89	---	---	Peak
2483.500	32.30	7.99	34.55	56.40	62.14	74.00	11.86	Peak
2484.000	32.30	7.99	34.55	57.67	63.41	74.00	10.59	Peak

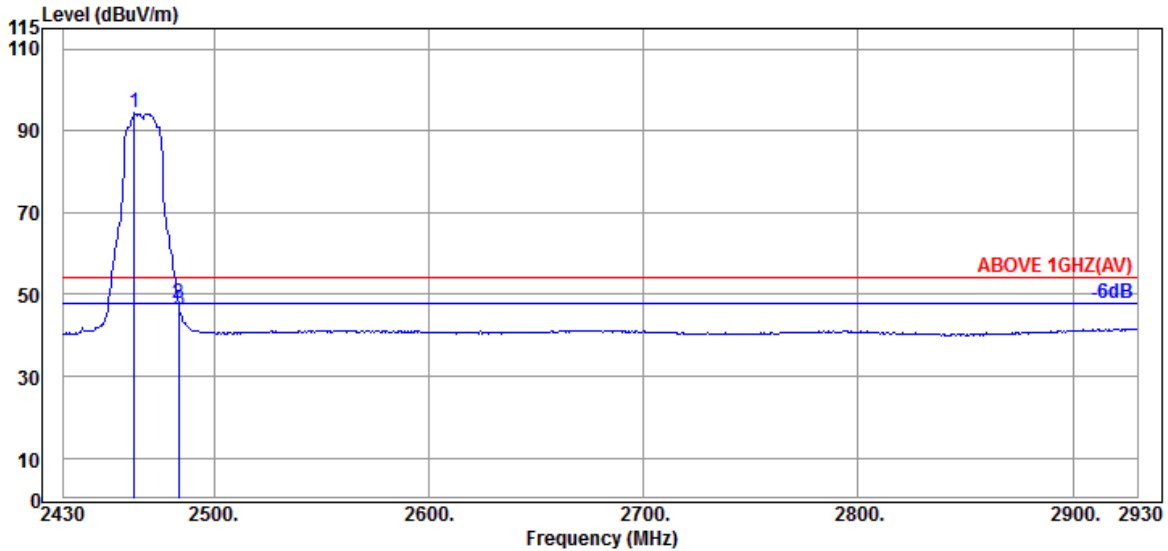


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.000	32.30	7.98	34.55	88.53	94.26	---	---	Average
2483.500	32.30	7.99	34.55	42.12	47.86	54.00	6.14	Average
2484.000	32.30	7.99	34.55	40.37	46.11	54.00	7.89	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

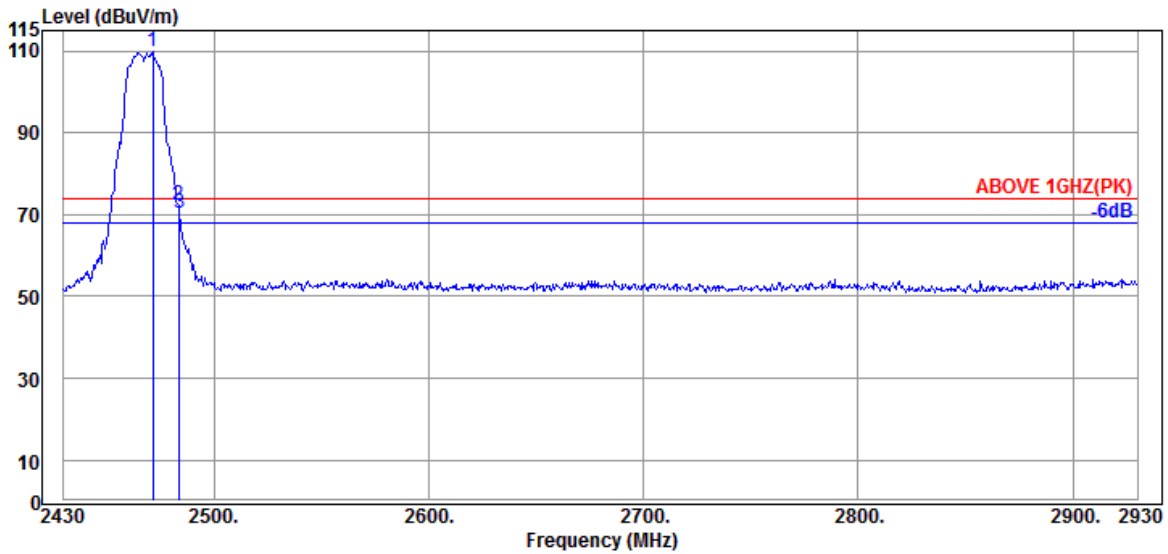

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	32.30	7.99	34.55	103.96	109.70	---	---	Peak
2483.500	32.30	7.99	34.55	66.58	72.32	74.00	1.68	Peak
2484.000	32.30	7.99	34.55	64.68	70.42	74.00	3.58	Peak

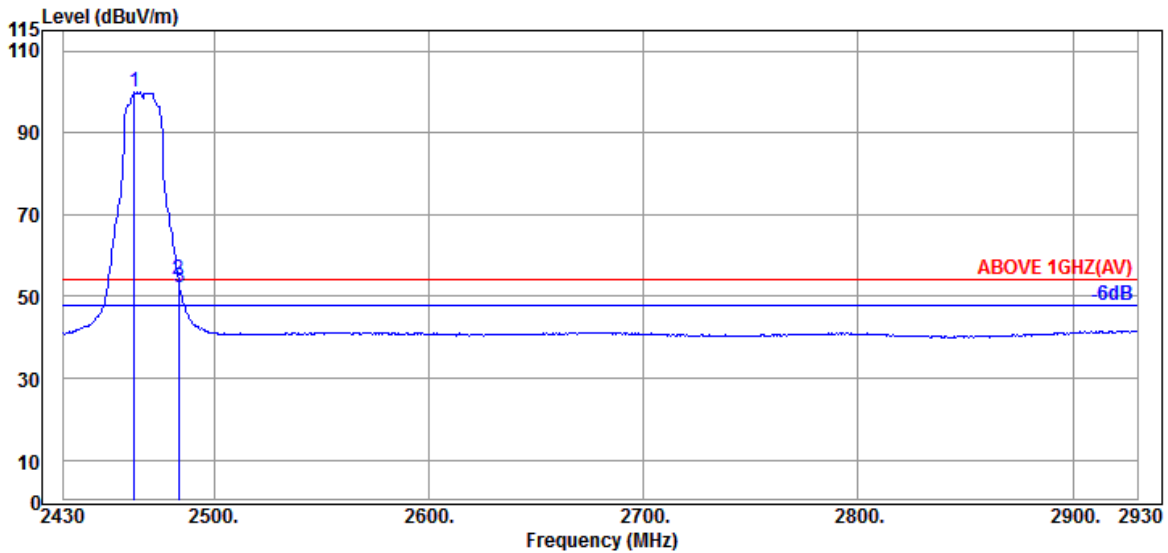


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	32.30	7.98	34.55	94.19	99.92	---	---	Average
2483.500	32.30	7.99	34.55	46.75	52.49	54.00	1.51	Average
2484.000	32.30	7.99	34.55	45.59	51.33	54.00	2.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

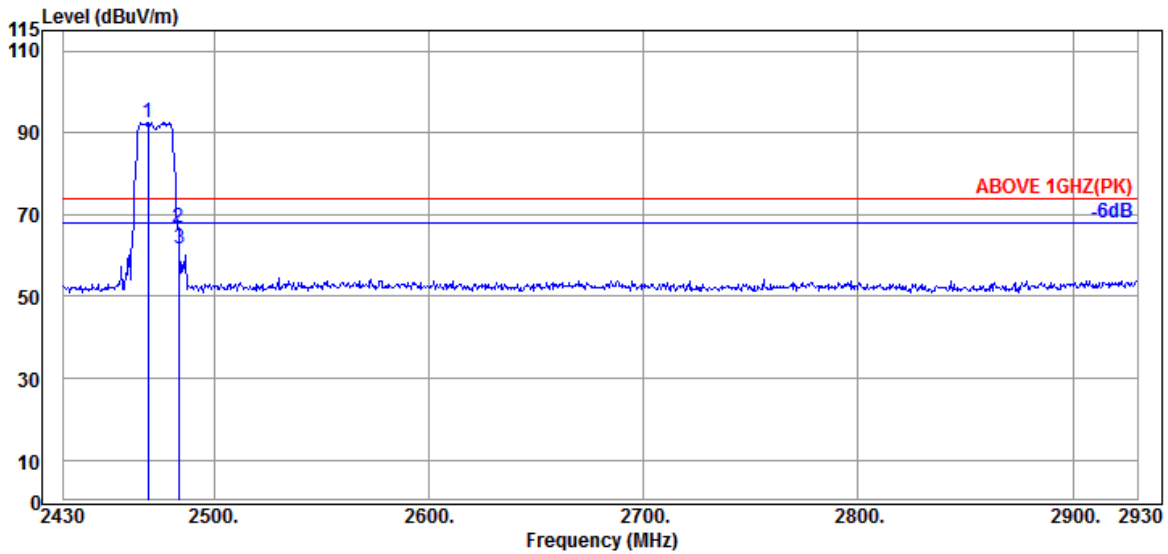

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	32.30	7.98	34.55	86.93	92.66	---	---	Peak
2483.500	32.30	7.99	34.55	61.16	66.90	74.00	7.10	Peak
2484.000	32.30	7.99	34.55	56.00	61.74	74.00	12.26	Peak

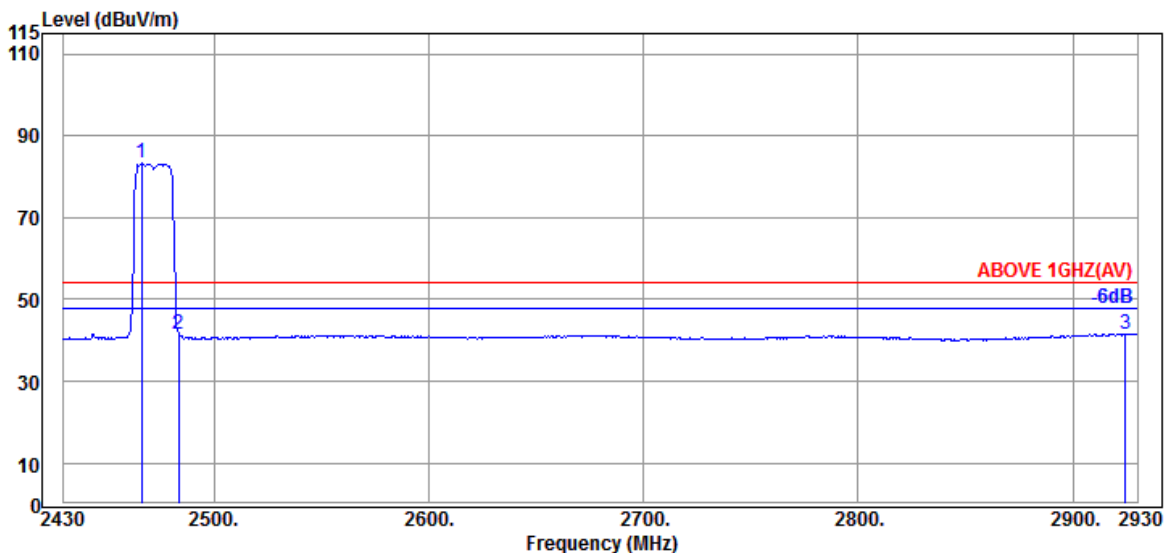


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	32.30	7.98	34.55	77.48	83.21	---	---	Average
2483.500	32.30	7.99	34.55	35.62	41.36	54.00	12.64	Average
2924.500	32.90	8.19	34.64	35.18	41.63	54.00	12.37	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

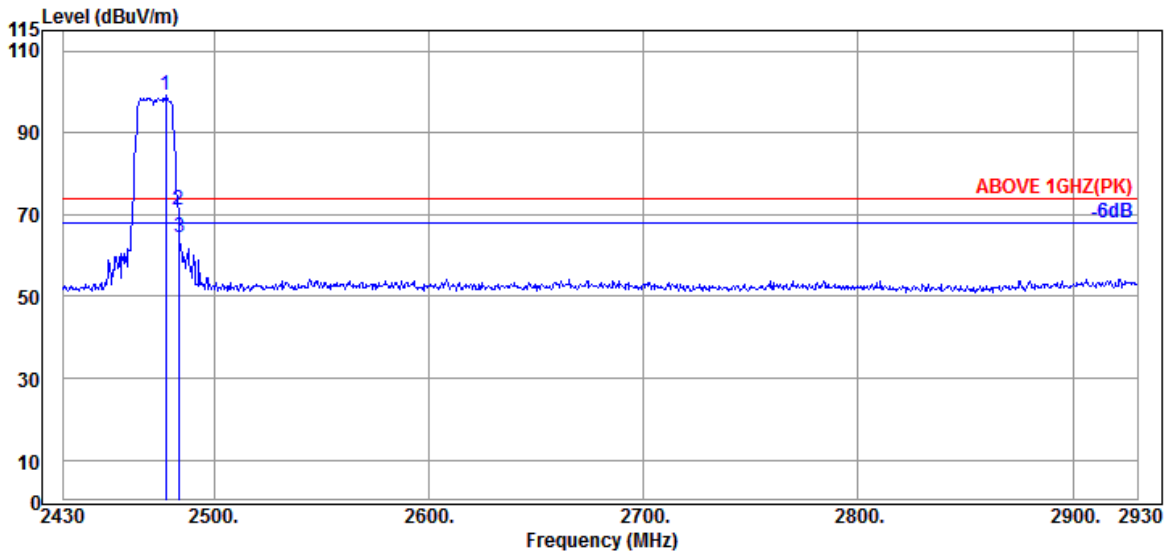

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.500	32.30	7.99	34.55	93.56	99.30	---	---	Peak
2483.500	32.30	7.99	34.55	65.41	71.15	74.00	2.85	Peak
2484.000	32.30	7.99	34.55	58.83	64.57	74.00	9.43	Peak

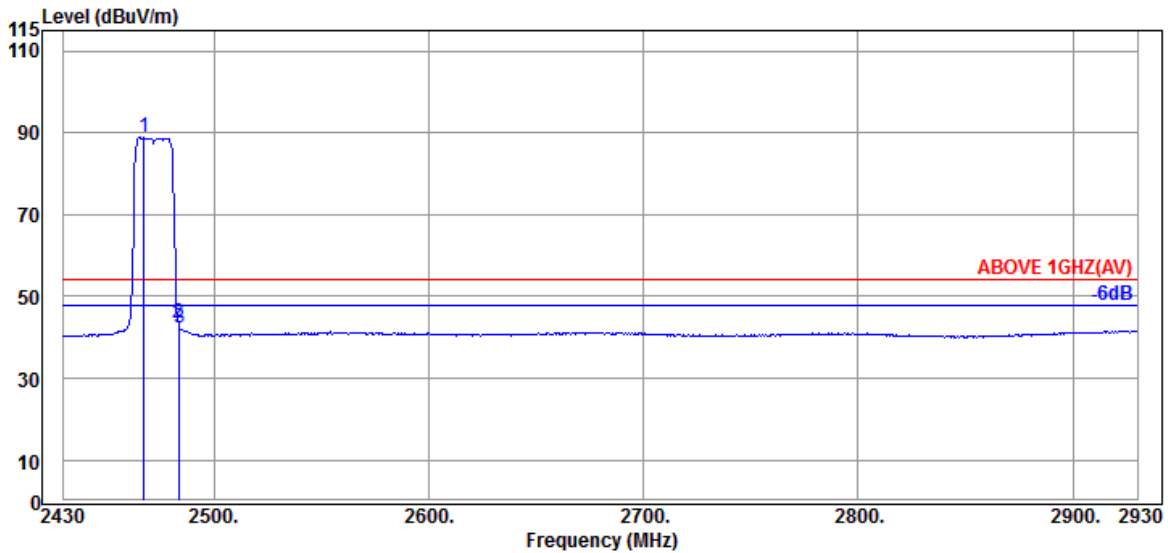


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.500	32.30	7.98	34.55	83.20	88.93	---	---	Average
2483.500	32.30	7.99	34.55	37.79	43.53	54.00	10.47	Average
2484.000	32.30	7.99	34.55	36.70	42.44	54.00	11.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

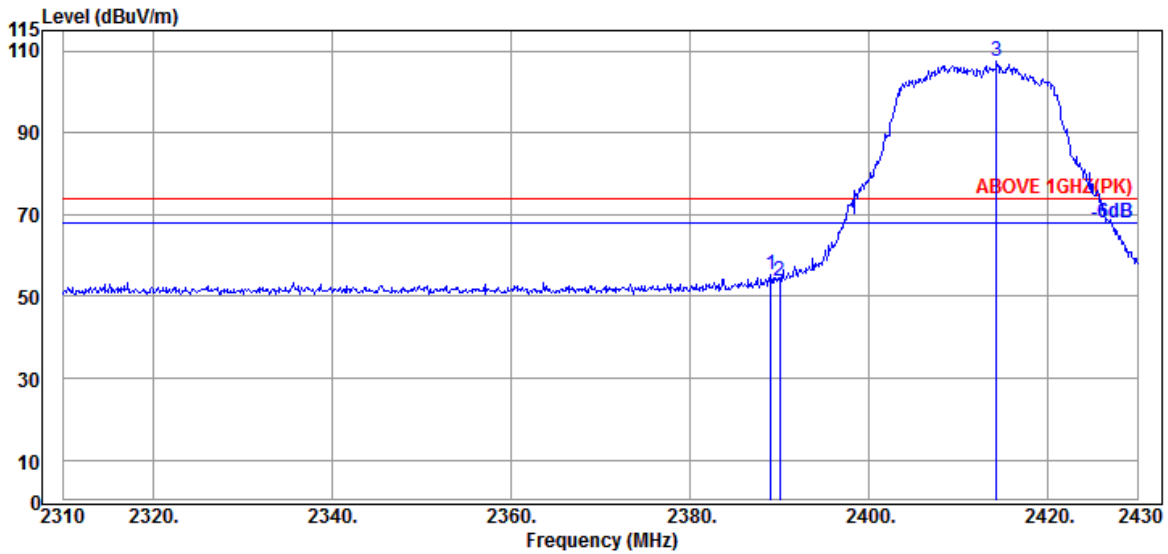

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	31.89	7.95	34.53	49.89	55.20	74.00	18.80	Peak
2390.040	31.89	7.95	34.54	48.32	53.62	74.00	20.38	Peak
@ 2414.280	31.94	7.96	34.54	102.01	107.37	---	---	Peak

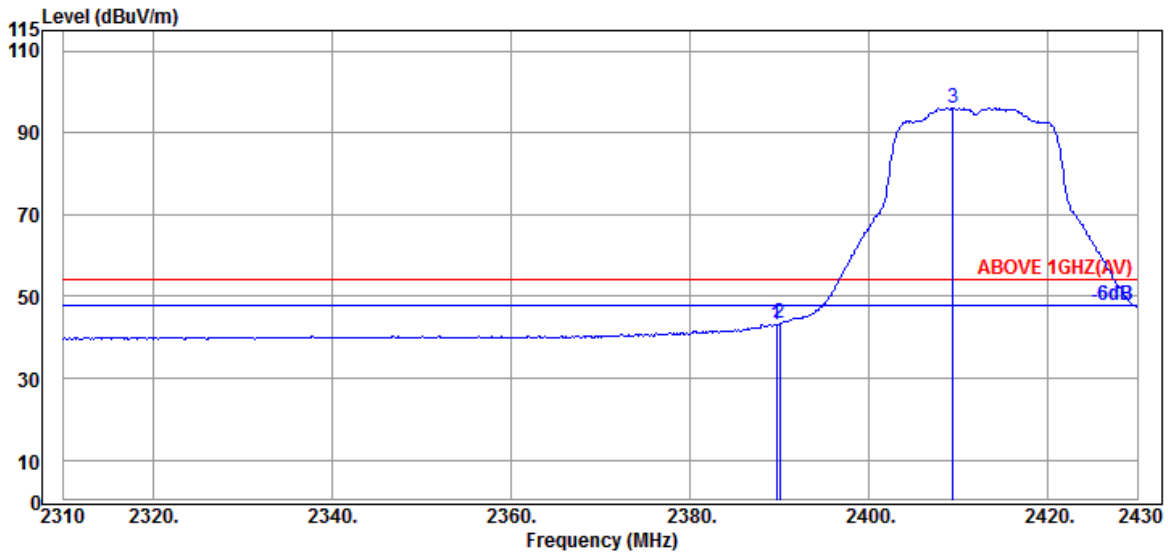


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.95	43.26	54.00	10.74	Average
2390.040	31.89	7.95	34.54	38.23	43.53	54.00	10.47	Average
@ 2409.360	31.87	7.96	34.54	90.76	96.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

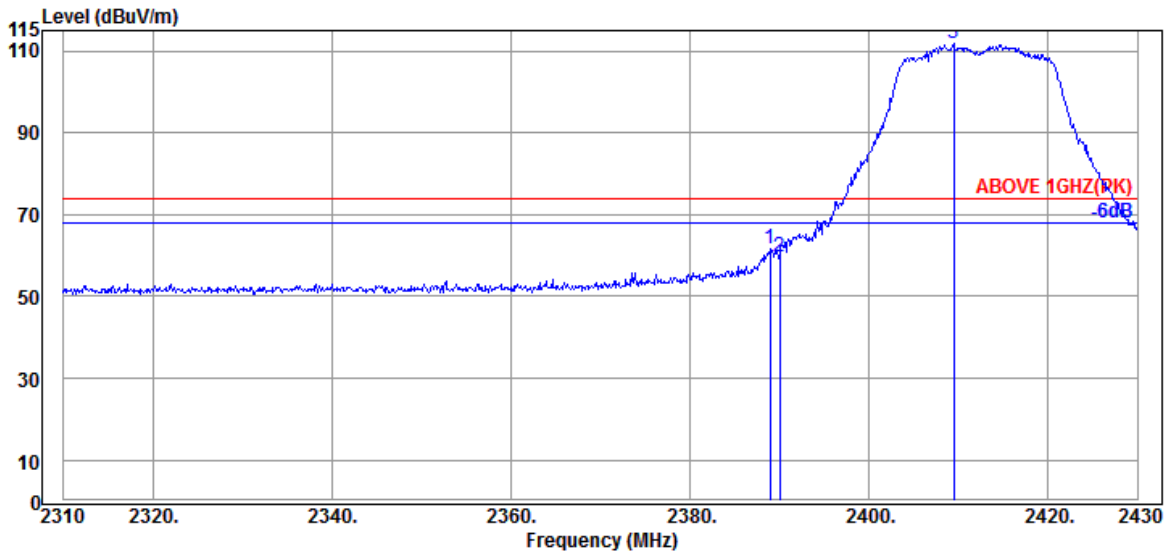

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	31.89	7.95	34.53	56.15	61.46	74.00	12.54	Peak
2390.040	31.89	7.95	34.54	54.37	59.67	74.00	14.33	Peak
@ 2409.480	31.87	7.96	34.54	106.43	111.72	---	---	Peak

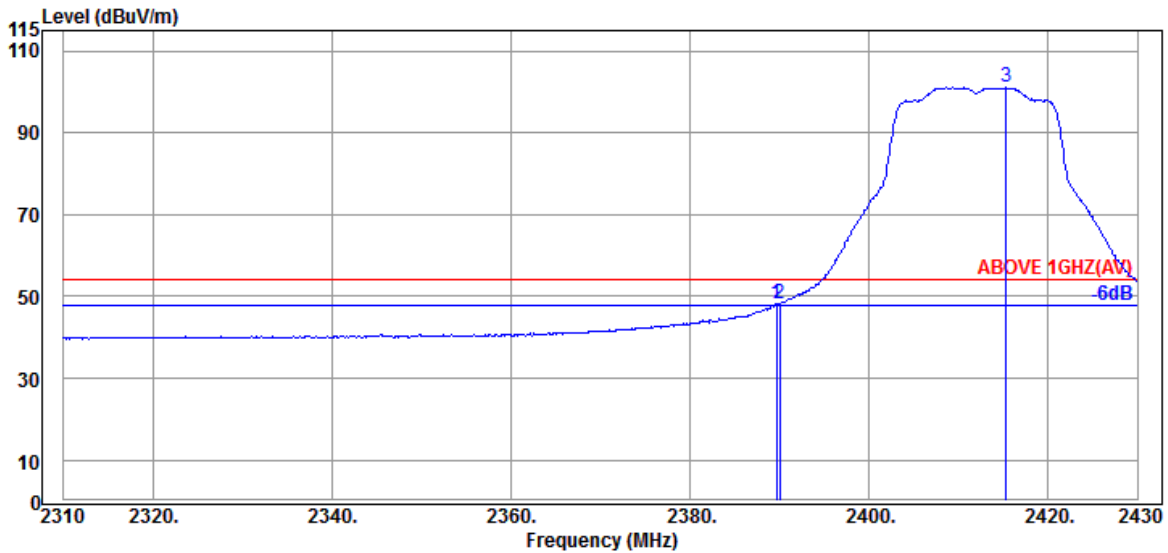


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	43.01	48.32	54.00	5.68	Average
2390.040	31.89	7.95	34.54	43.11	48.41	54.00	5.59	Average
@ 2415.360	31.94	7.96	34.54	95.68	101.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

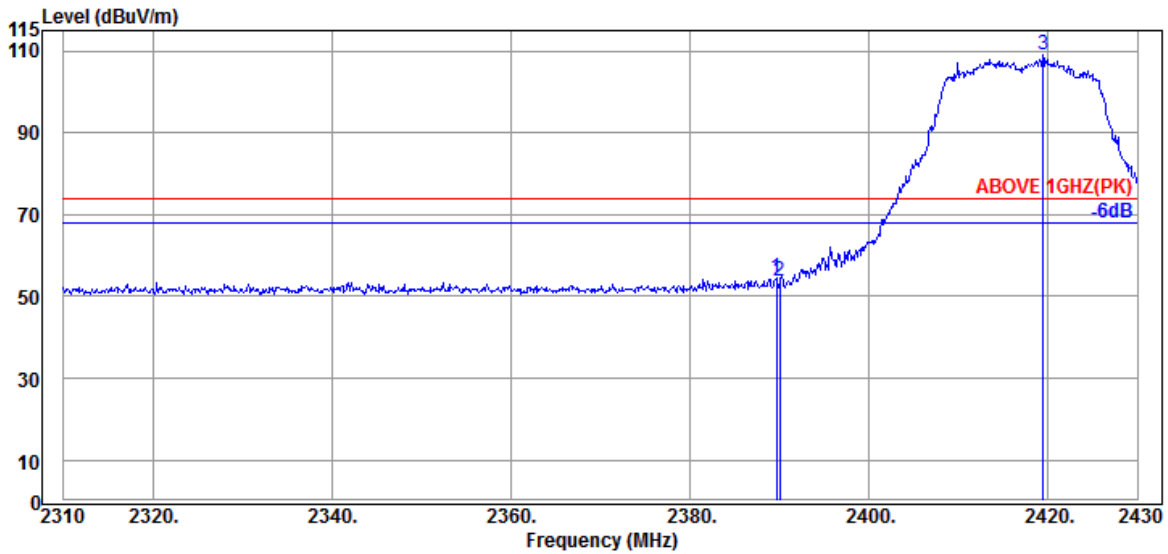

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	49.08	54.39	74.00	19.61	Peak
2390.040	31.89	7.95	34.54	48.50	53.80	74.00	20.20	Peak
@ 2419.440	32.01	7.96	34.54	103.45	108.88	---	---	Peak

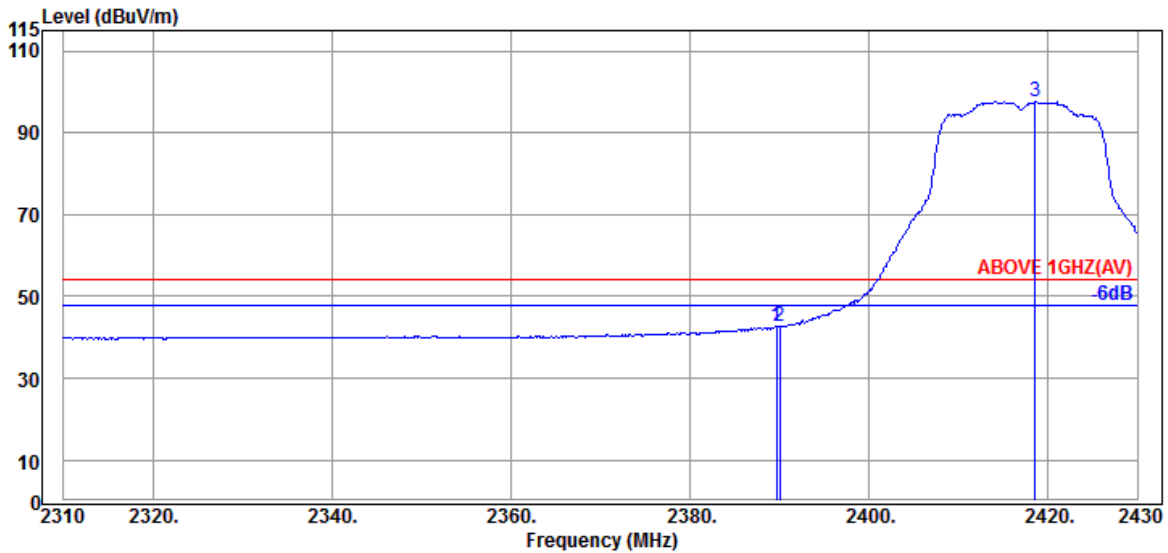


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.23	42.54	54.00	11.46	Average
2390.040	31.89	7.95	34.54	37.21	42.51	54.00	11.49	Average
@ 2418.600	32.01	7.96	34.54	92.09	97.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

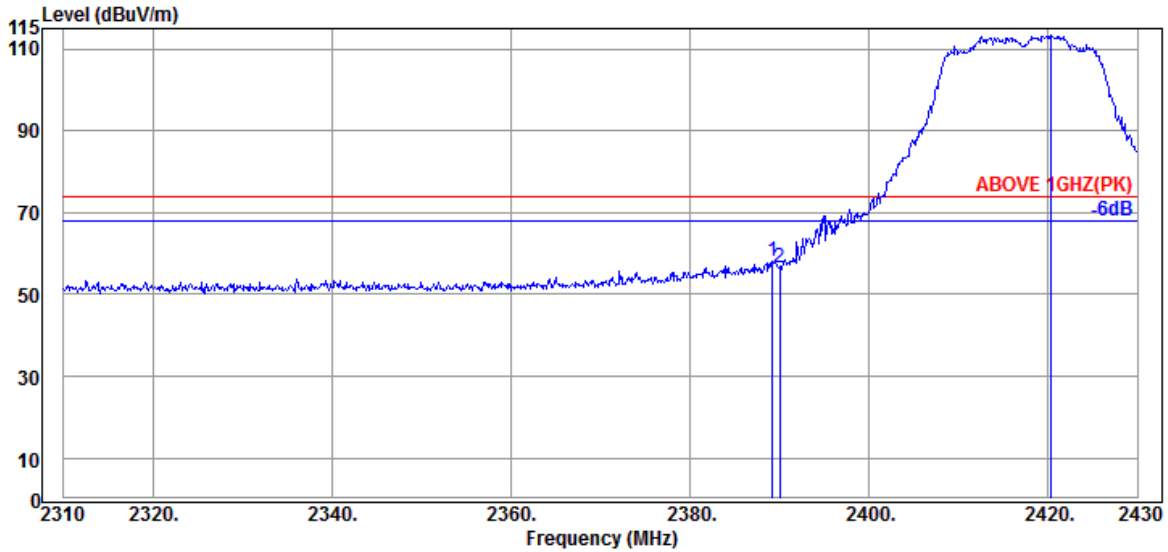

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	52.67	57.98	74.00	16.02	Peak
2390.040	31.89	7.95	34.54	51.12	56.42	74.00	17.58	Peak
@ 2420.280	32.01	7.96	34.54	107.81	113.24	---	---	Peak

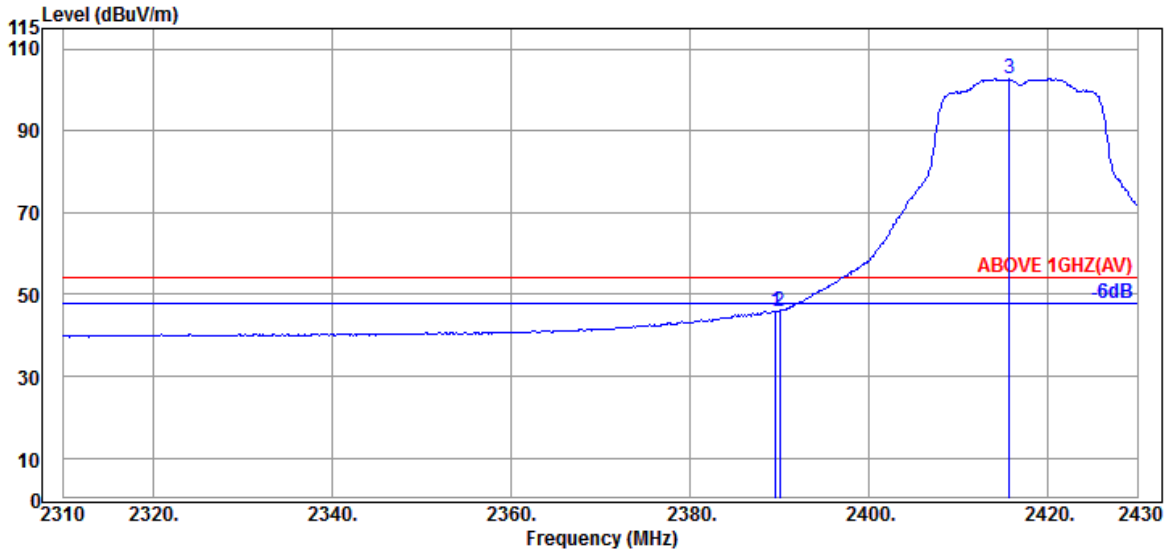


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	40.69	46.00	54.00	8.00	Average
2390.040	31.89	7.95	34.54	40.73	46.03	54.00	7.97	Average
@ 2415.720	31.94	7.96	34.54	97.32	102.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

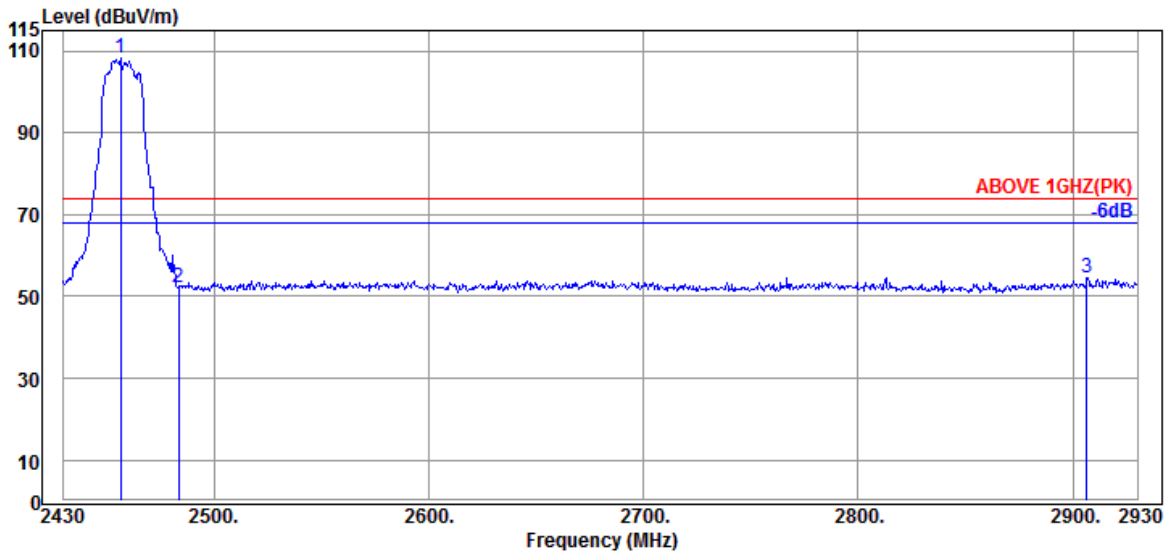

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	32.30	7.98	34.55	102.49	108.22	---	---	Peak
2483.500	32.30	7.99	34.55	46.23	51.97	74.00	22.03	Peak
2906.500	32.77	8.18	34.64	48.36	54.67	74.00	19.33	Peak

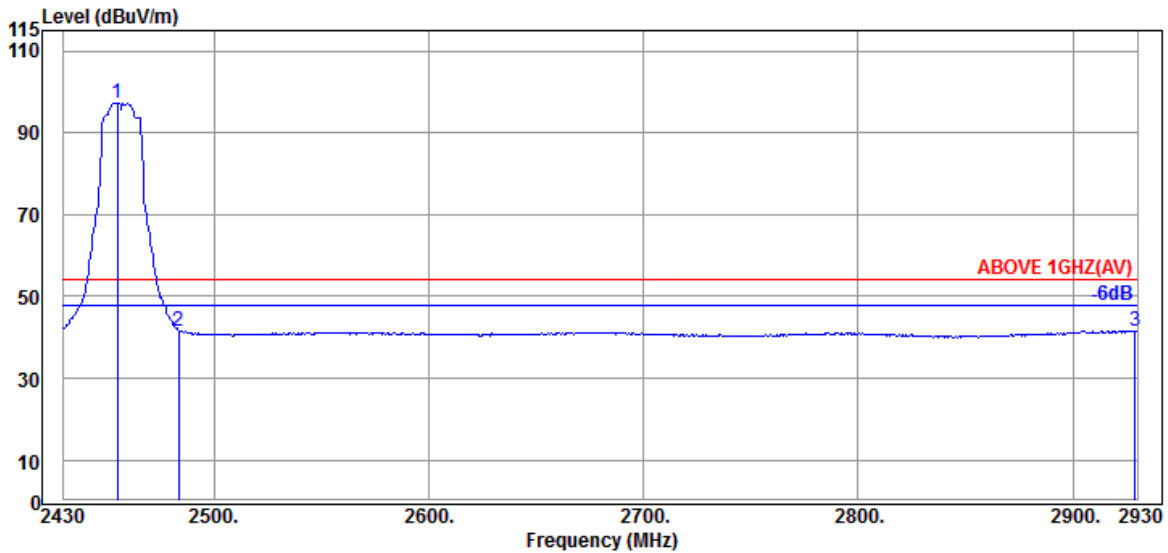


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	91.64	97.37	---	---	Average
2483.500	32.30	7.99	34.55	35.89	41.63	54.00	12.37	Average
2929.000	32.97	8.19	34.65	34.96	41.47	54.00	12.53	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

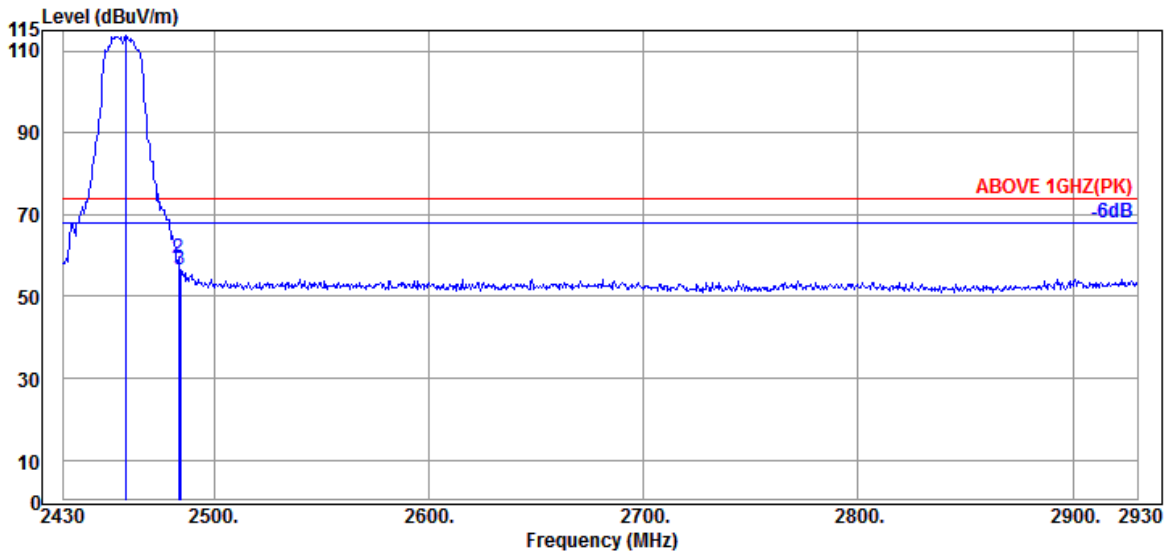

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	108.10	113.83	---	---	Peak
2483.500	32.30	7.99	34.55	53.46	59.20	74.00	14.80	Peak
2484.500	32.30	7.99	34.55	50.89	56.63	74.00	17.37	Peak

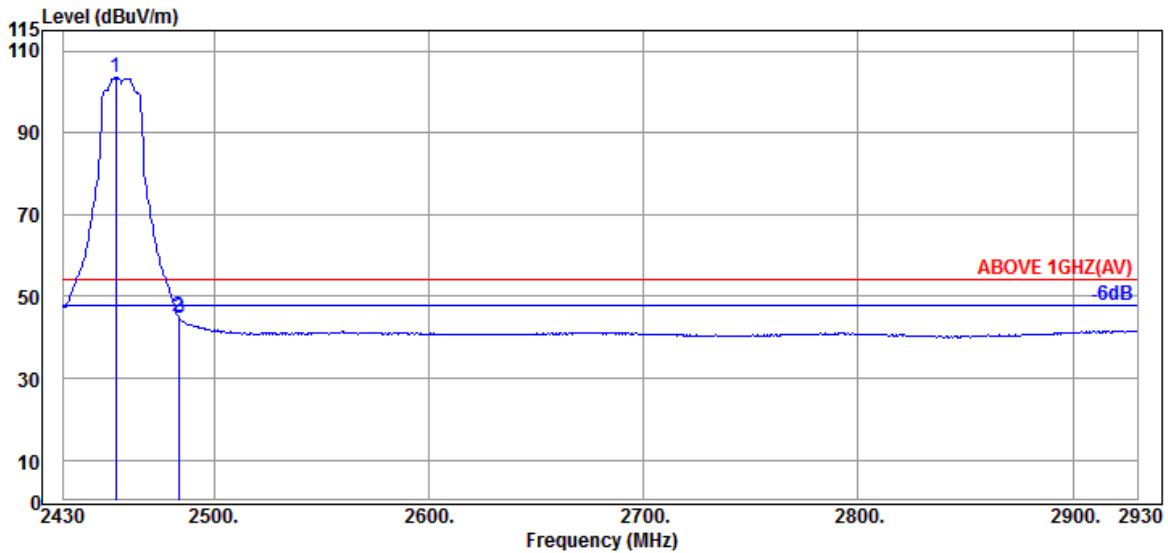


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	97.76	103.49	---	---	Average
2483.500	32.30	7.99	34.55	39.43	45.17	54.00	8.83	Average
2484.000	32.30	7.99	34.55	38.94	44.68	54.00	9.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

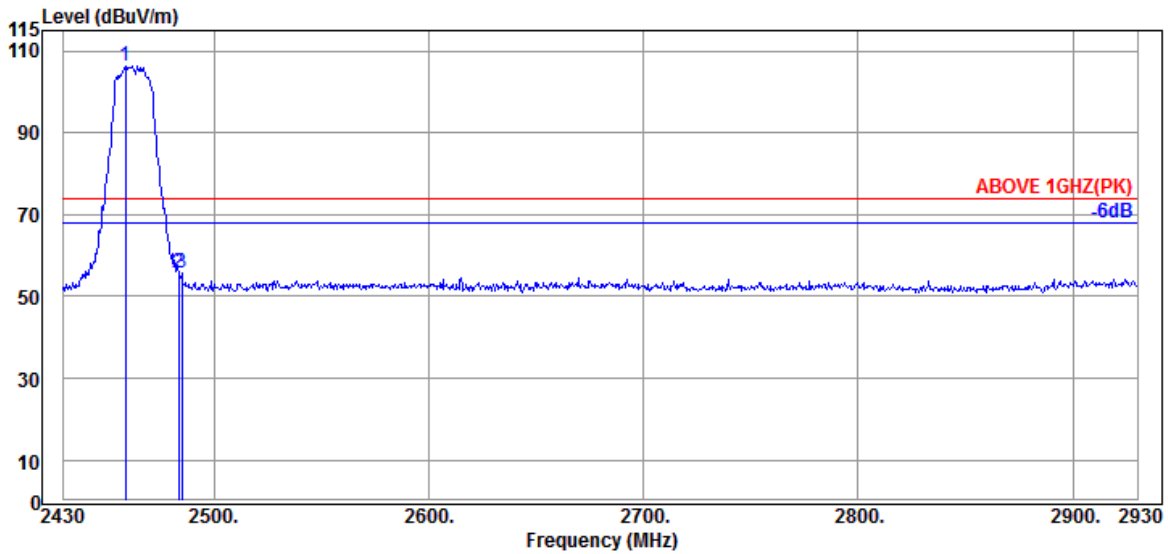

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	100.61	106.34	---	---	Peak
2483.500	32.30	7.99	34.55	49.83	55.57	74.00	18.43	Peak
2485.000	32.30	7.99	34.55	49.91	55.65	74.00	18.35	Peak

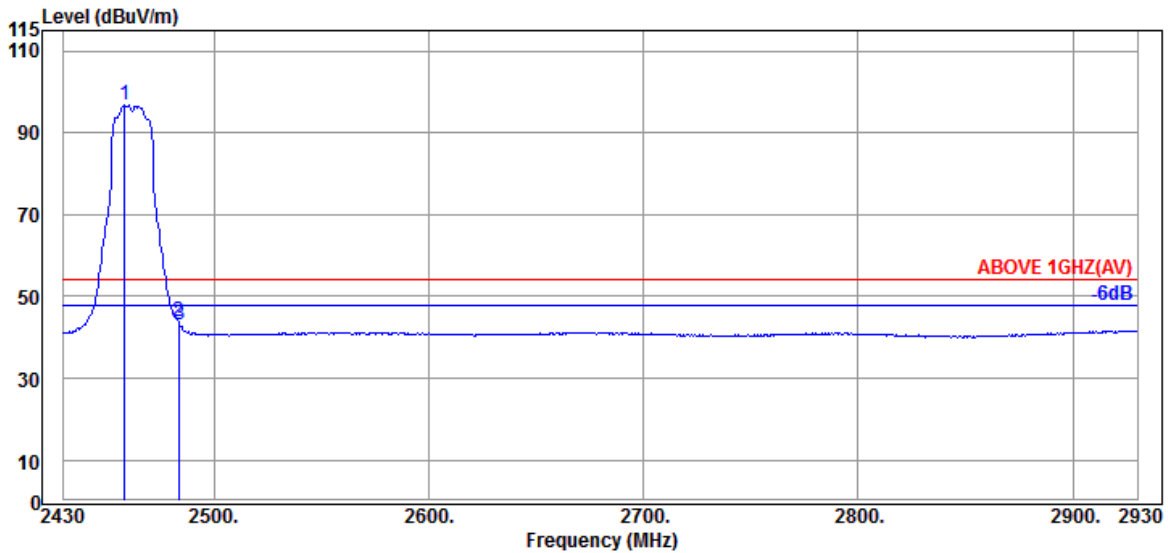


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.30	7.98	34.55	90.98	96.71	---	---	Average
2483.500	32.30	7.99	34.55	37.99	43.73	54.00	10.27	Average
2484.000	32.30	7.99	34.55	37.23	42.97	54.00	11.03	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

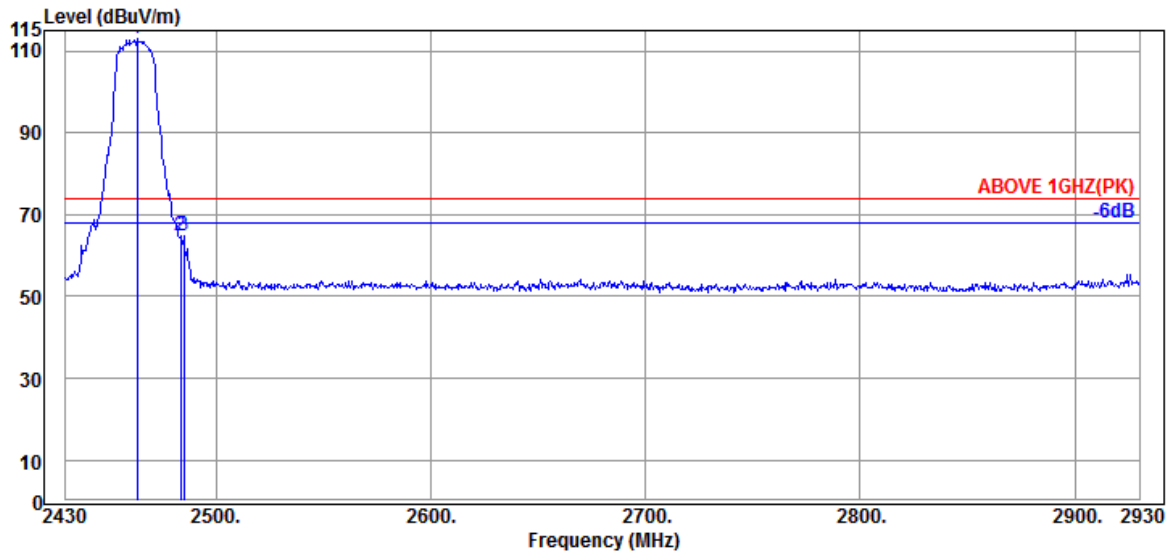

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.30	7.98	34.55	107.15	112.88	---	---	Peak
2483.500	32.30	7.99	34.55	58.91	64.65	74.00	9.35	Peak
2485.000	32.30	7.99	34.55	59.26	65.00	74.00	9.00	Peak

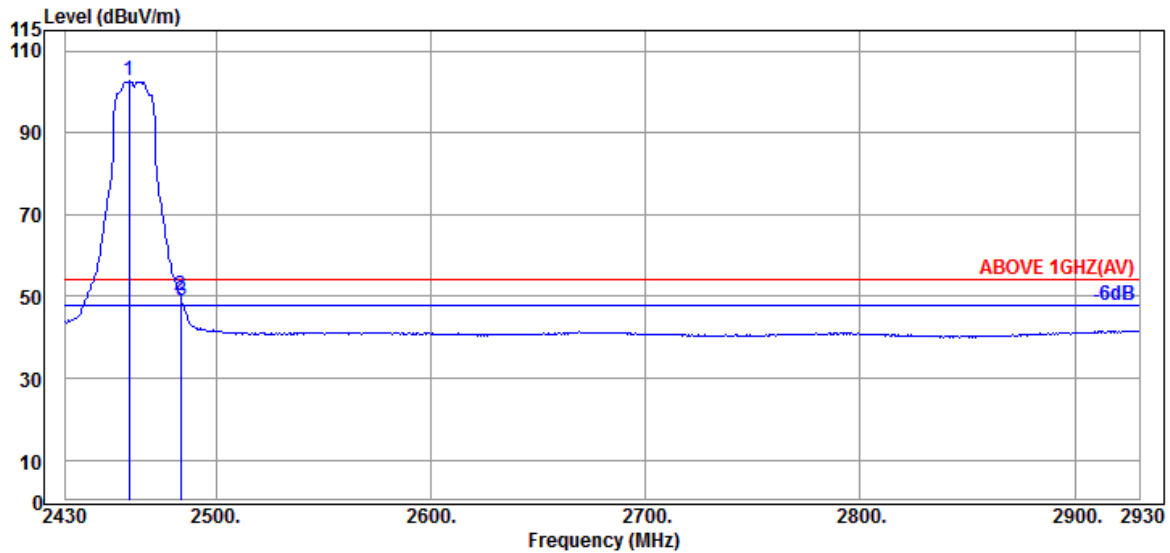


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.30	7.98	34.55	97.06	102.79	---	---	Average
2483.500	32.30	7.99	34.55	44.43	50.17	54.00	3.83	Average
2484.000	32.30	7.99	34.55	43.32	49.06	54.00	4.94	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

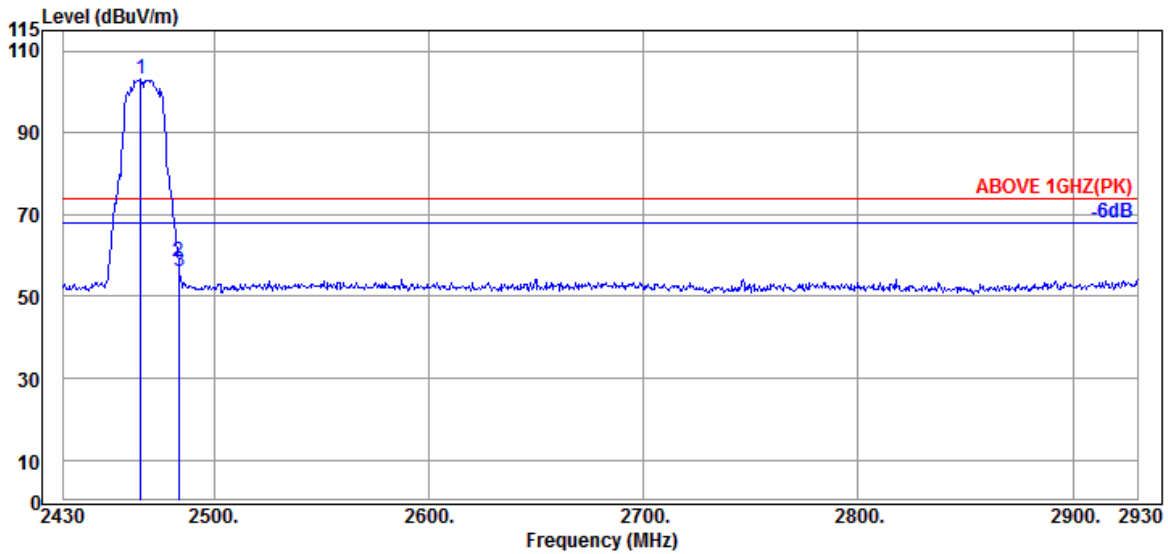

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	97.36	103.09	---	---	Peak
2483.500	32.30	7.99	34.55	52.72	58.46	74.00	15.54	Peak
2484.000	32.30	7.99	34.55	50.31	56.05	74.00	17.95	Peak

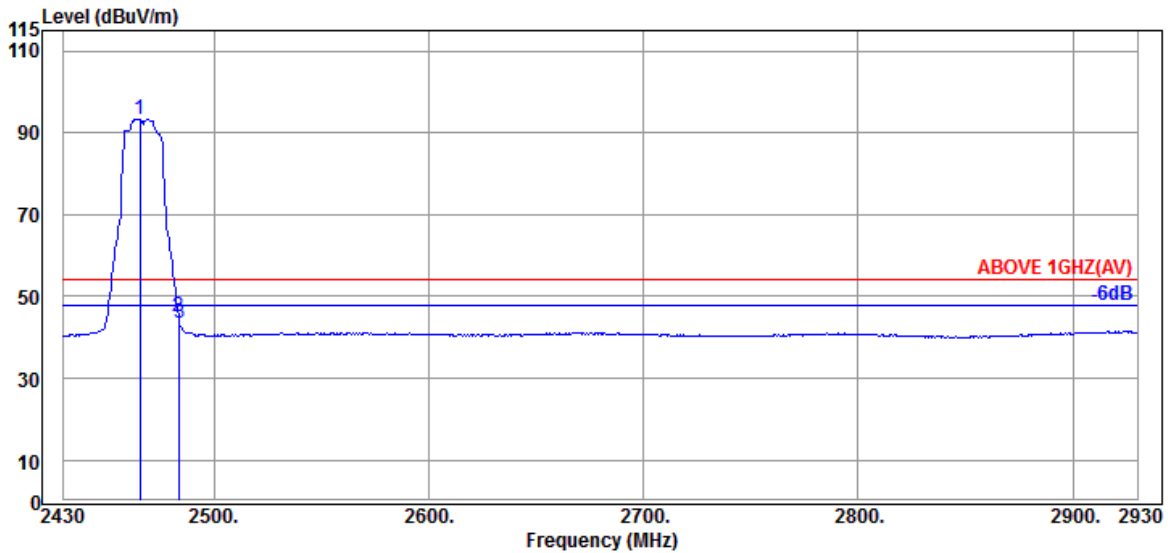


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	87.59	93.32	---	---	Average
2483.500	32.30	7.99	34.55	39.45	45.19	54.00	8.81	Average
2484.000	32.30	7.99	34.55	37.72	43.46	54.00	10.54	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

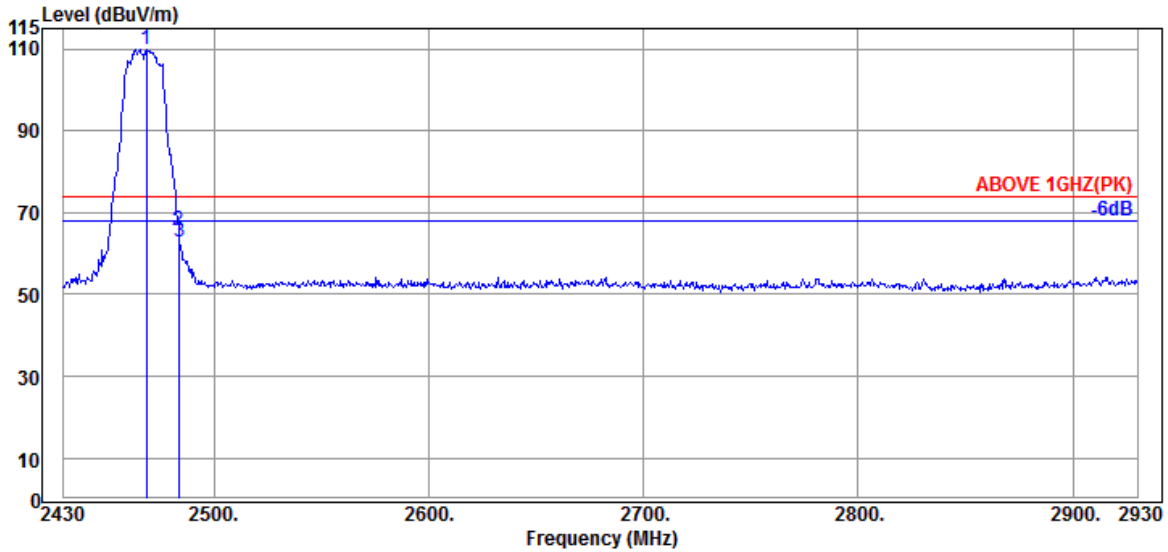

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.30	7.98	34.55	104.26	109.99	---	---	Peak
2483.500	32.30	7.99	34.55	59.78	65.52	74.00	8.48	Peak
2484.000	32.30	7.99	34.55	57.14	62.88	74.00	11.12	Peak

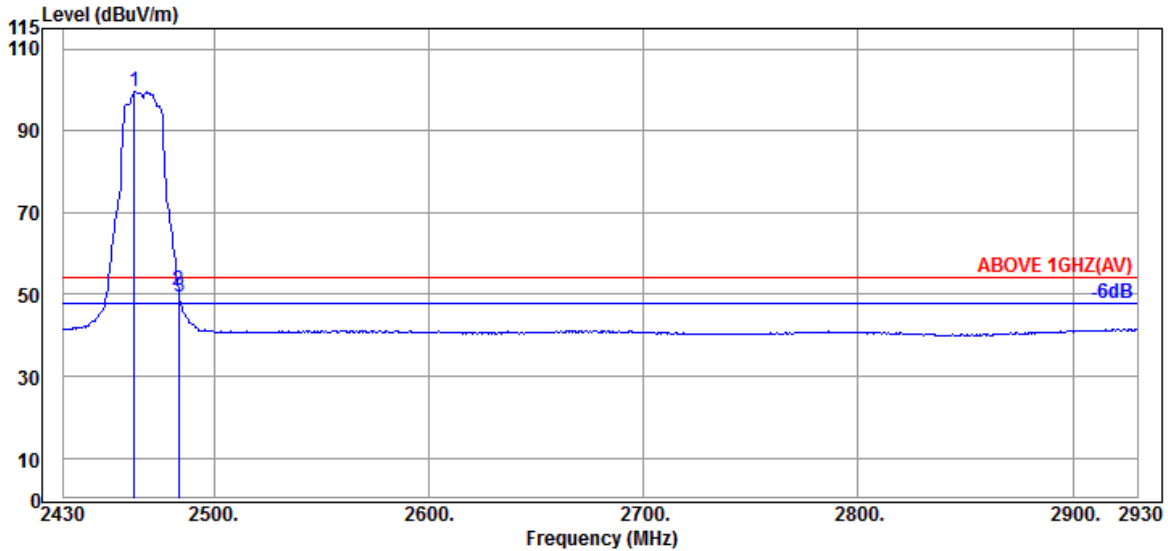


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	32.30	7.98	34.55	93.74	99.47	---	---	Average
2483.500	32.30	7.99	34.55	45.36	51.10	54.00	2.90	Average
2484.000	32.30	7.99	34.55	43.77	49.51	54.00	4.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

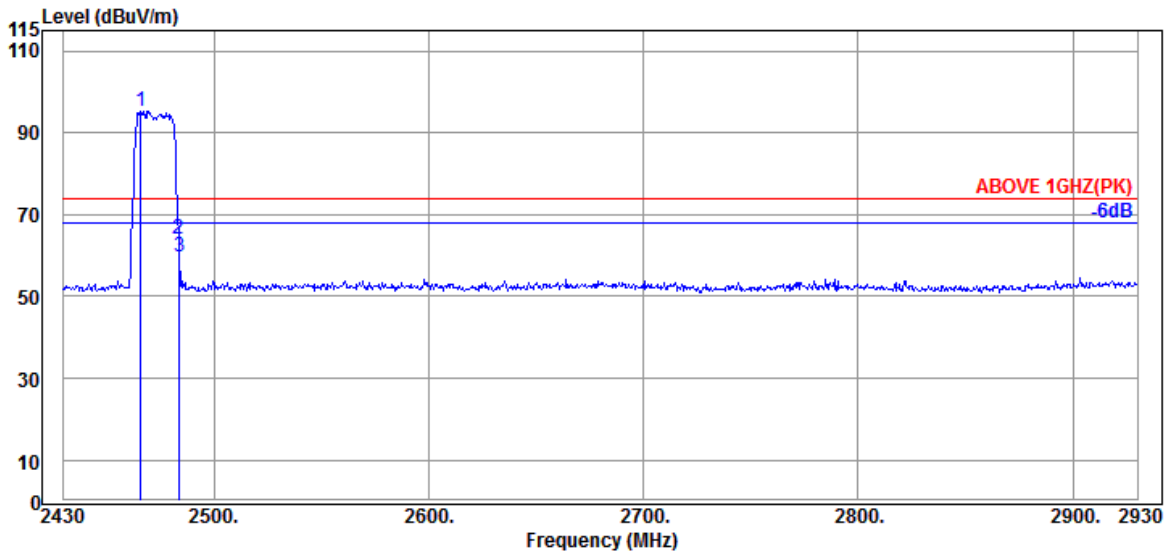

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	89.52	95.25	---	---	Peak
2483.500	32.30	7.99	34.55	58.24	63.98	74.00	10.02	Peak
2484.000	32.30	7.99	34.55	53.99	59.73	74.00	14.27	Peak

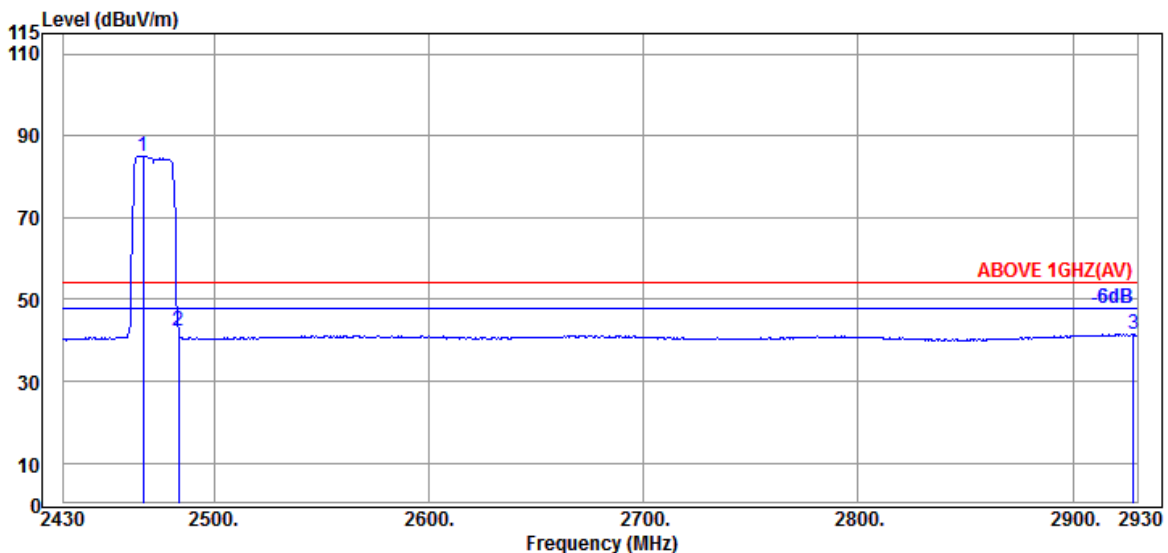


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.000	32.30	7.98	34.55	79.31	85.04	---	---	Average
2483.500	32.30	7.99	34.55	36.44	42.18	54.00	11.82	Average
2928.000	32.97	8.19	34.65	34.98	41.49	54.00	12.51	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

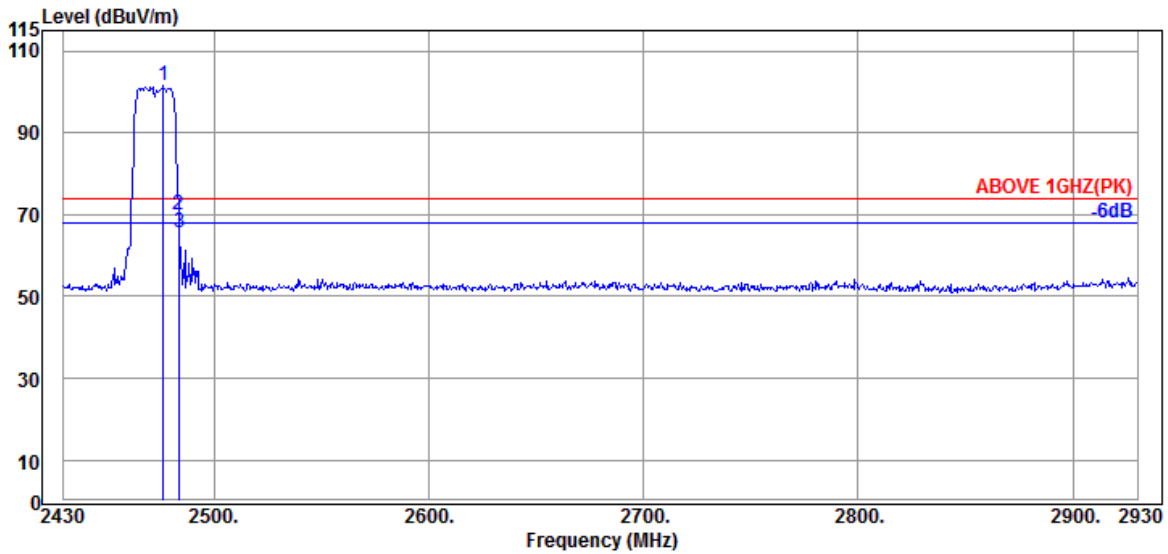

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	32.30	7.99	34.55	95.70	101.44	---	---	Peak
2483.500	32.30	7.99	34.55	64.15	69.89	74.00	4.11	Peak
2484.000	32.30	7.99	34.55	59.68	65.42	74.00	8.58	Peak

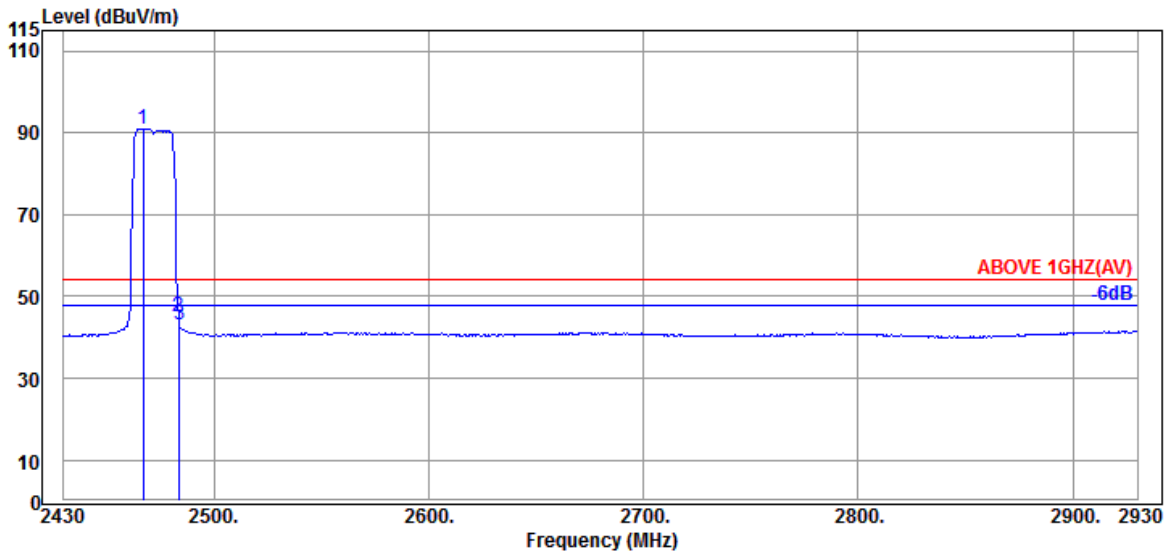


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	32.30	7.98	34.55	85.30	91.03	---	---	Average
2483.500	32.30	7.99	34.55	39.21	44.95	54.00	9.05	Average
2484.000	32.30	7.99	34.55	37.23	42.97	54.00	11.03	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

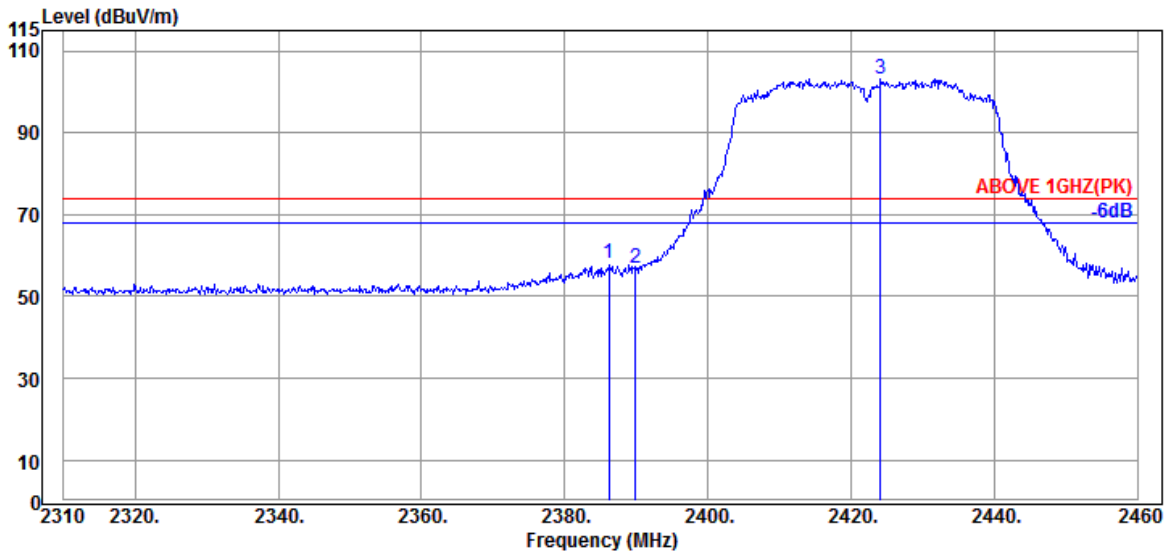

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2386.200	31.89	7.95	34.53	52.59	57.90	74.00	16.10	Peak
2389.950	31.89	7.95	34.54	51.62	56.92	74.00	17.08	Peak
@ 2424.150	32.01	7.97	34.54	97.87	103.31	---	---	Peak

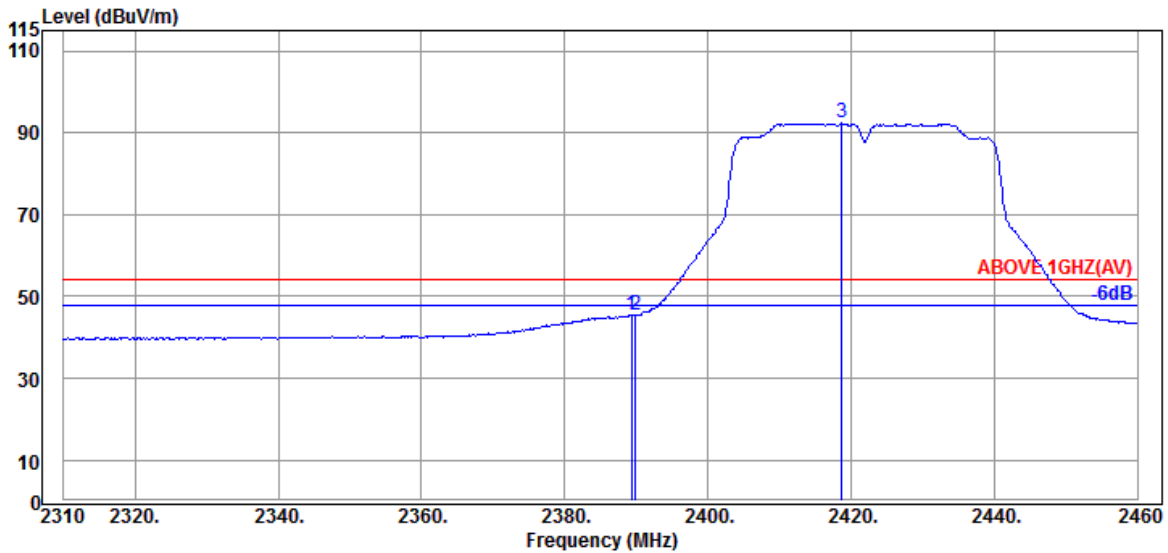


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	31.89	7.95	34.53	40.17	45.48	54.00	8.52	Average
2389.950	31.89	7.95	34.54	40.03	45.33	54.00	8.67	Average
@ 2418.750	32.01	7.96	34.54	86.88	92.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

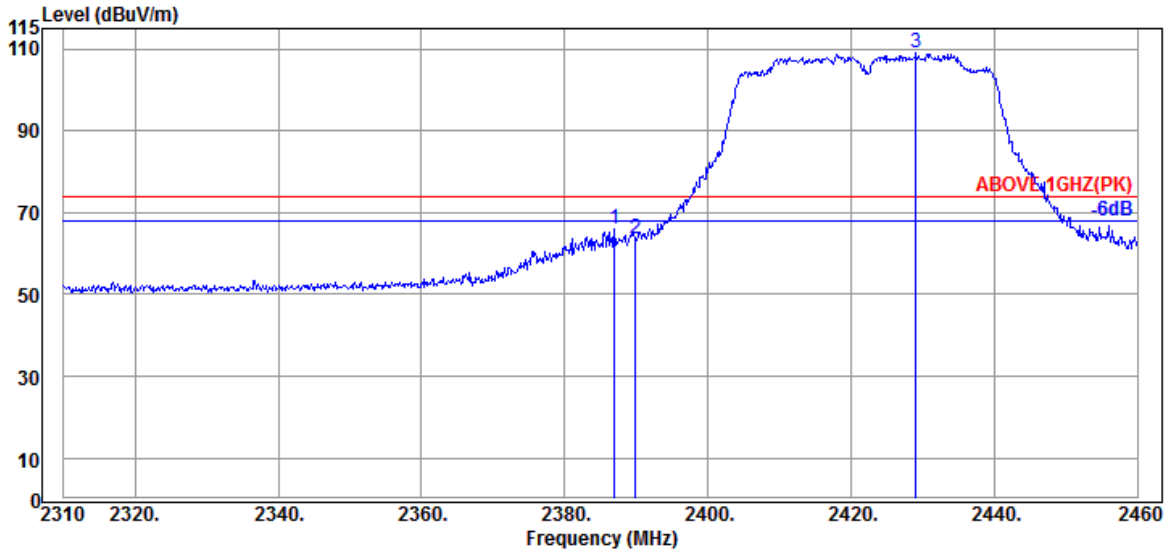

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.950	31.89	7.95	34.53	60.77	66.08	74.00	7.92	Peak
2389.950	31.89	7.95	34.54	58.30	63.60	74.00	10.40	Peak
@ 2429.100	32.09	7.97	34.54	103.61	109.13	---	---	Peak

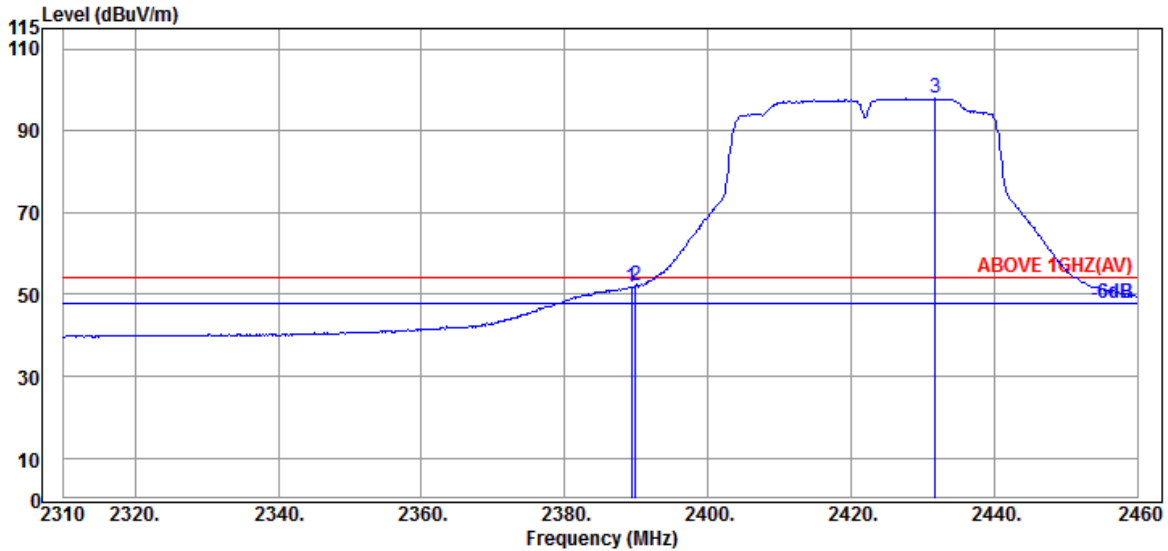


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	31.89	7.95	34.53	46.47	51.78	54.00	2.22	Average
2389.950	31.89	7.95	34.54	46.99	52.29	54.00	1.71	Average
@ 2431.800	32.09	7.97	34.54	92.32	97.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

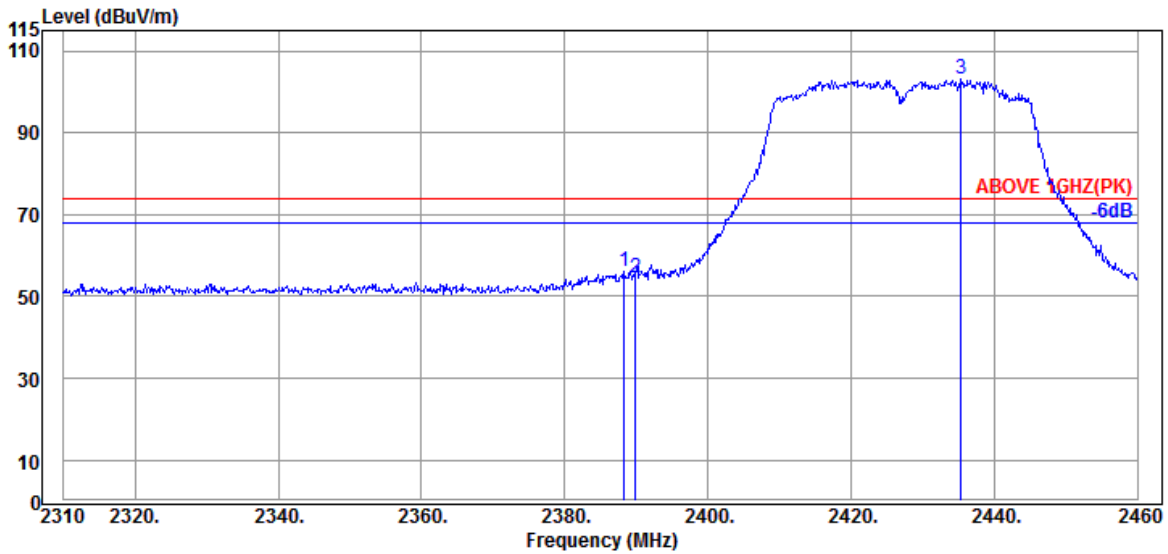

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	31.89	7.95	34.53	50.91	56.22	74.00	17.78	Peak
2389.950	31.89	7.95	34.54	49.43	54.73	74.00	19.27	Peak
@ 2435.400	32.16	7.97	34.54	97.39	102.98	---	---	Peak

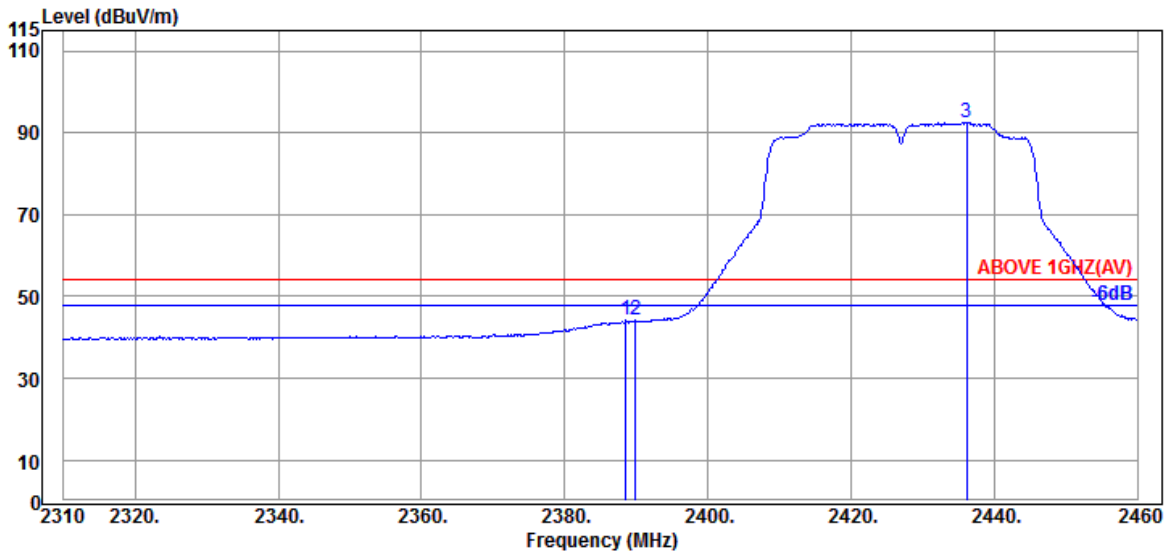


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	31.89	7.95	34.53	38.77	44.08	54.00	9.92	Average
2389.950	31.89	7.95	34.54	38.86	44.16	54.00	9.84	Average
@ 2436.150	32.16	7.97	34.54	86.80	92.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

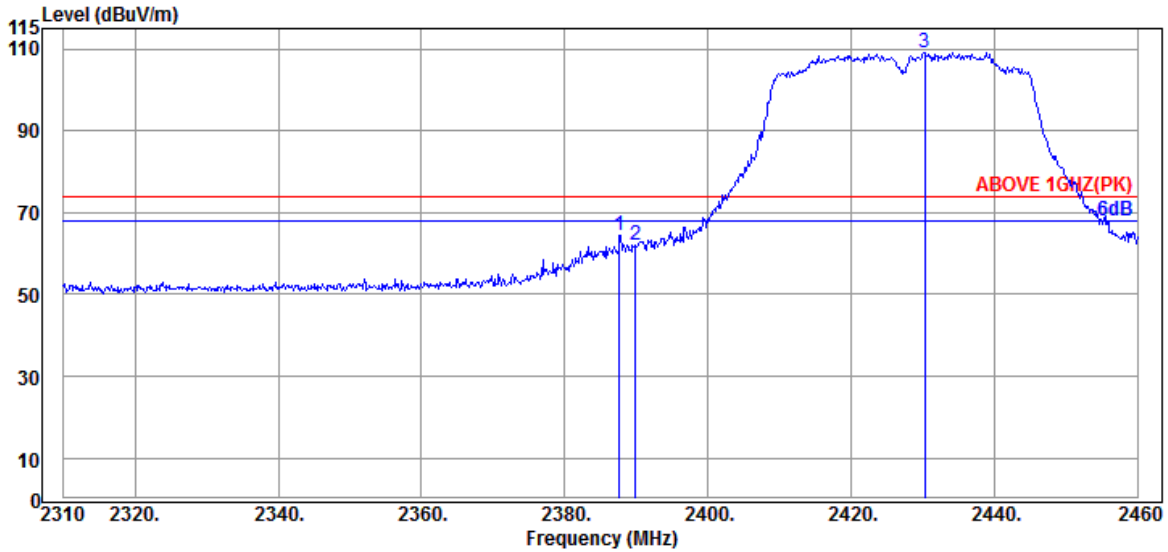

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	31.89	7.95	34.53	59.18	64.49	74.00	9.51	Peak
2389.950	31.89	7.95	34.54	56.91	62.21	74.00	11.79	Peak
@ 2430.300	32.09	7.97	34.54	103.61	109.13	---	---	Peak

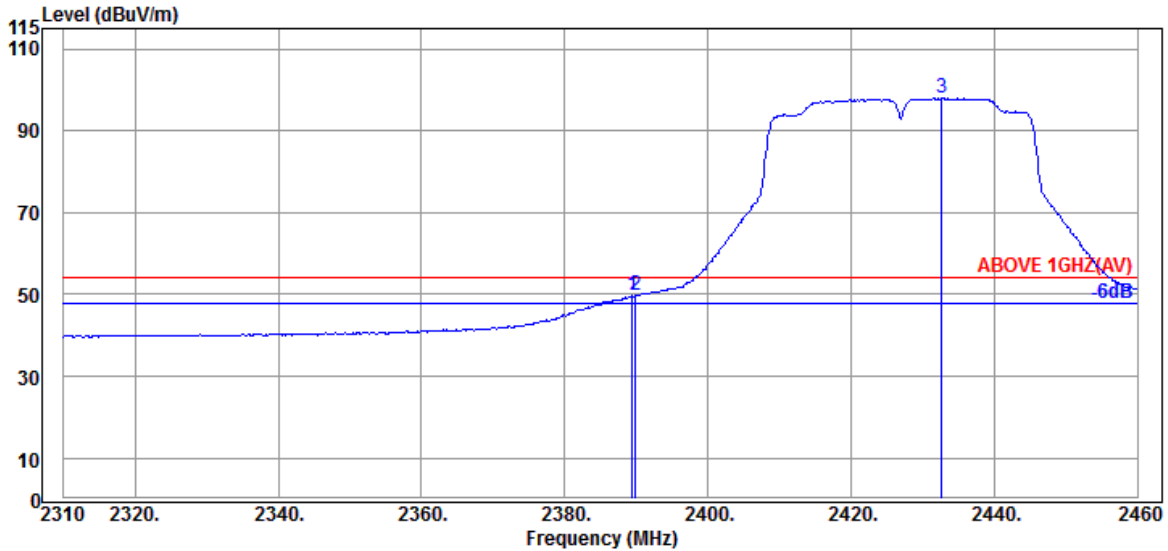


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	7.95	34.53	44.38	49.69	54.00	4.31	Average
2389.950	31.89	7.95	34.54	44.45	49.75	54.00	4.25	Average
@ 2432.700	32.16	7.97	34.54	92.47	98.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

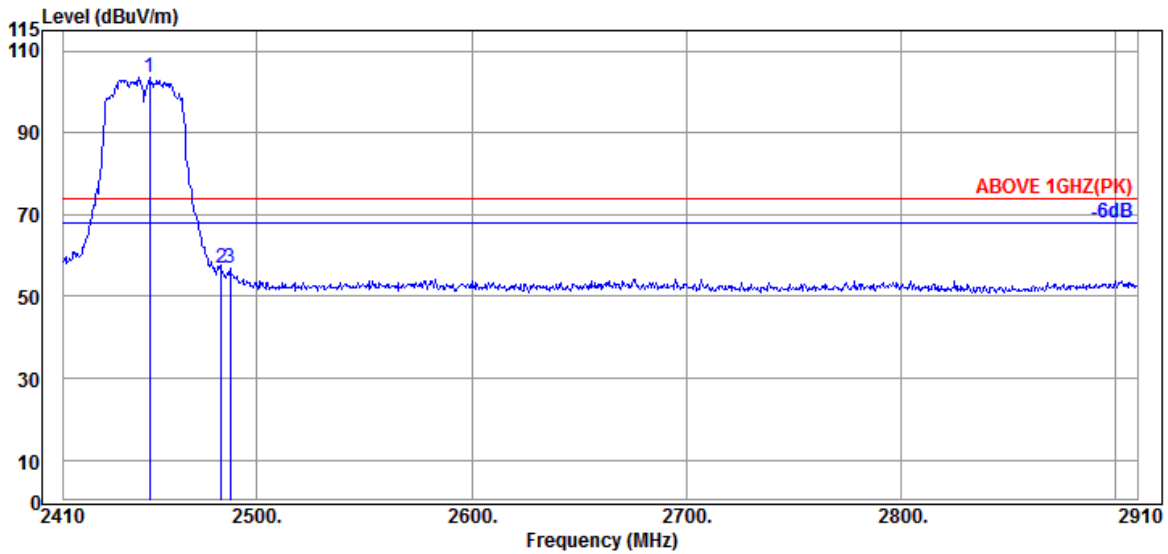

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.000	32.30	7.98	34.55	97.95	103.68	---	---	Peak
2483.500	32.30	7.99	34.55	51.26	57.00	74.00	17.00	Peak
2487.500	32.30	8.00	34.55	51.11	56.86	74.00	17.14	Peak

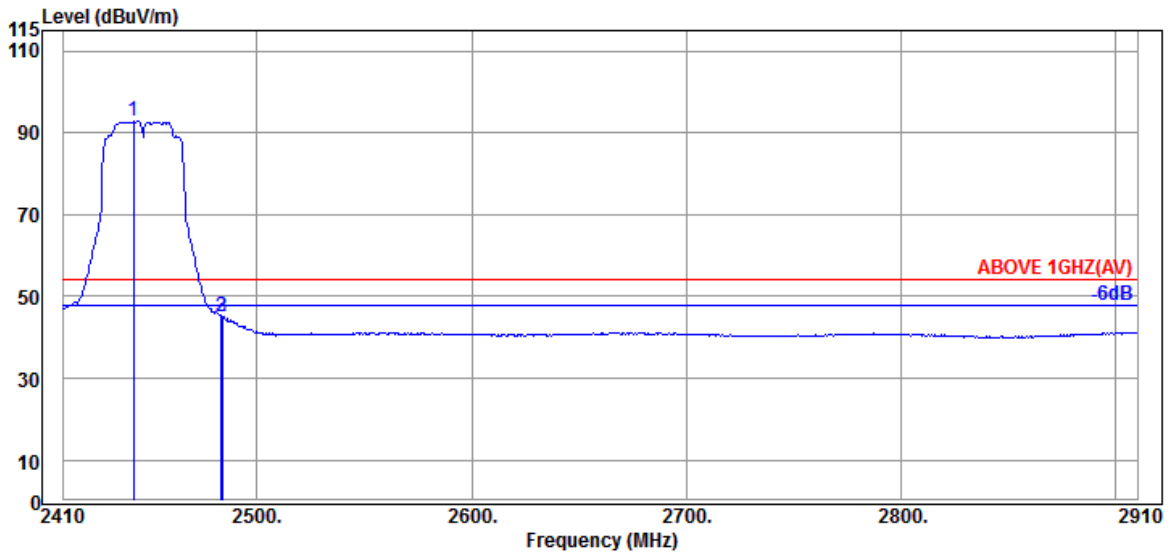


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.500	32.23	7.98	34.55	87.34	93.00	---	---	Average
2483.500	32.30	7.99	34.55	39.49	45.23	54.00	8.77	Average
2484.000	32.30	7.99	34.55	39.28	45.02	54.00	8.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

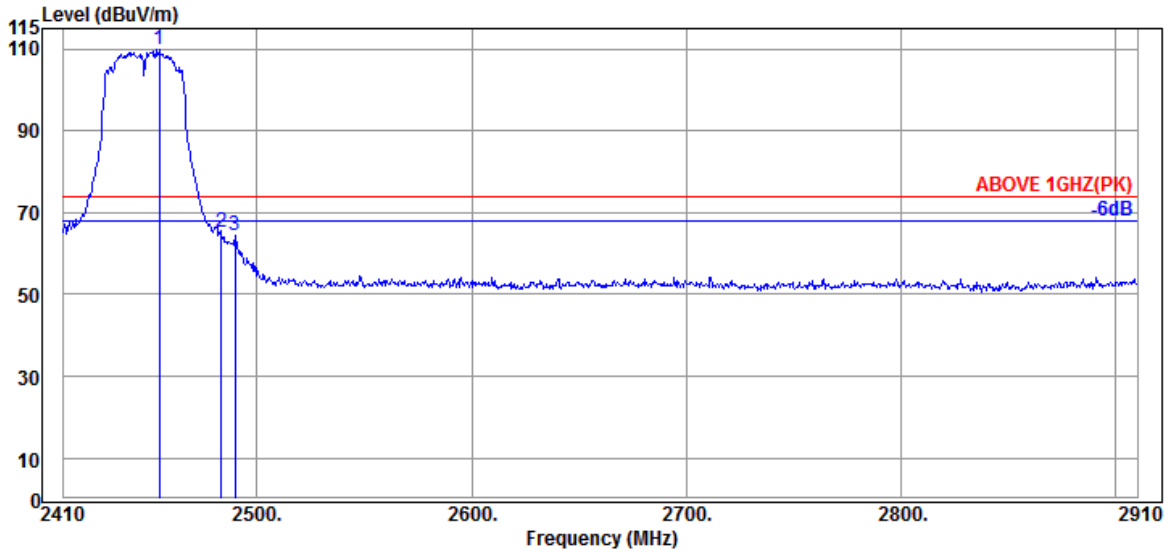

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.30	7.98	34.55	104.21	109.94	---	---	Peak
2483.500	32.30	7.99	34.55	59.34	65.08	74.00	8.92	Peak
2490.000	32.30	8.00	34.55	58.57	64.32	74.00	9.68	Peak

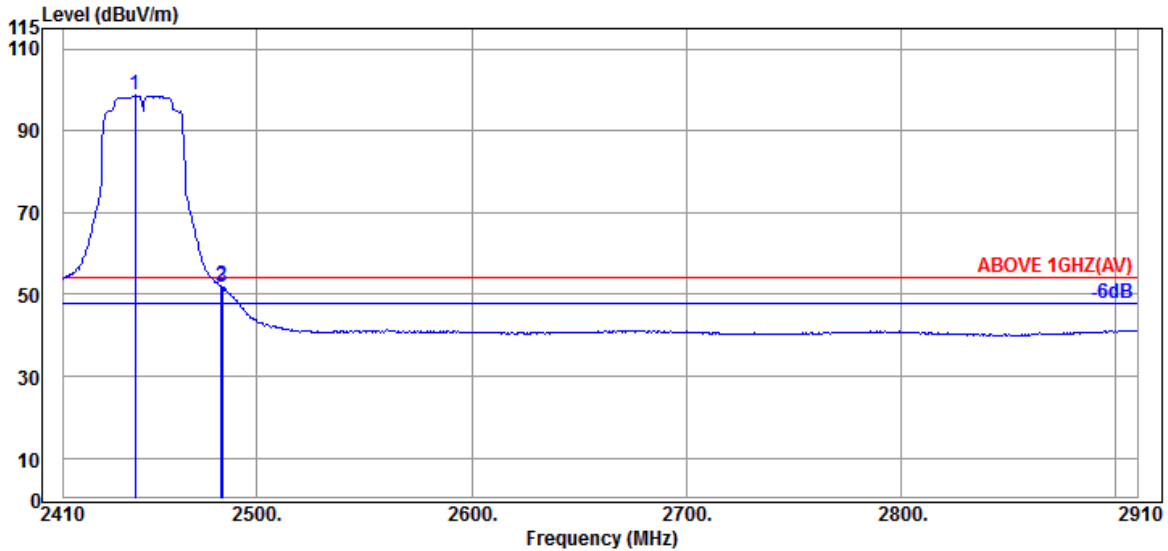


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2443.500	32.23	7.98	34.55	93.03	98.69	---	---	Average
2483.500	32.30	7.99	34.55	46.40	52.14	54.00	1.86	Average
2484.000	32.30	7.99	34.55	46.05	51.79	54.00	2.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

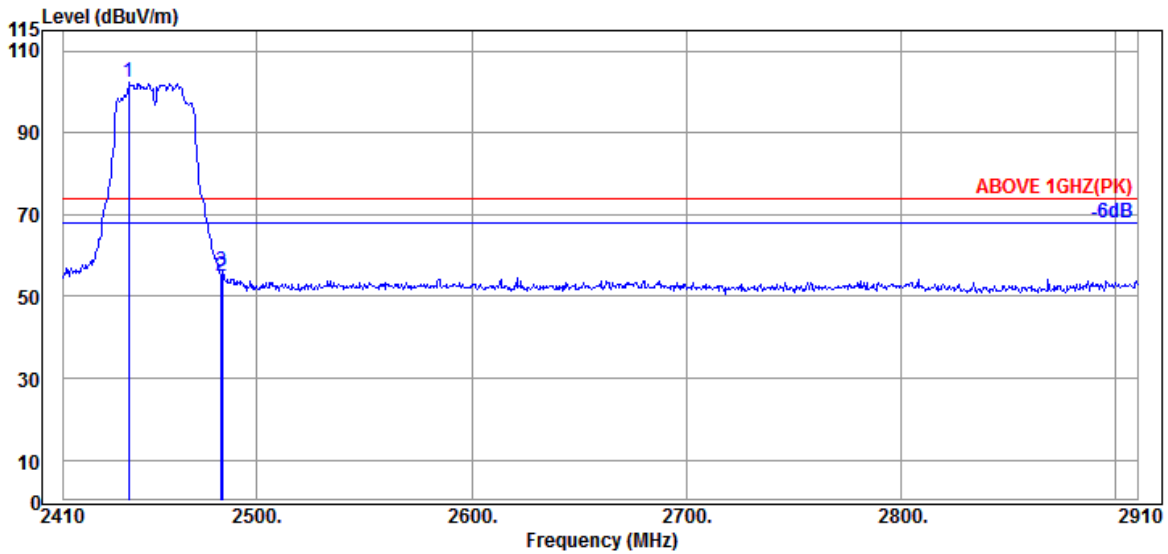

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.500	32.23	7.98	34.54	96.58	102.25	---	---	Peak
2483.500	32.30	7.99	34.55	49.31	55.05	74.00	18.95	Peak
2484.000	32.30	7.99	34.55	50.23	55.97	74.00	18.03	Peak

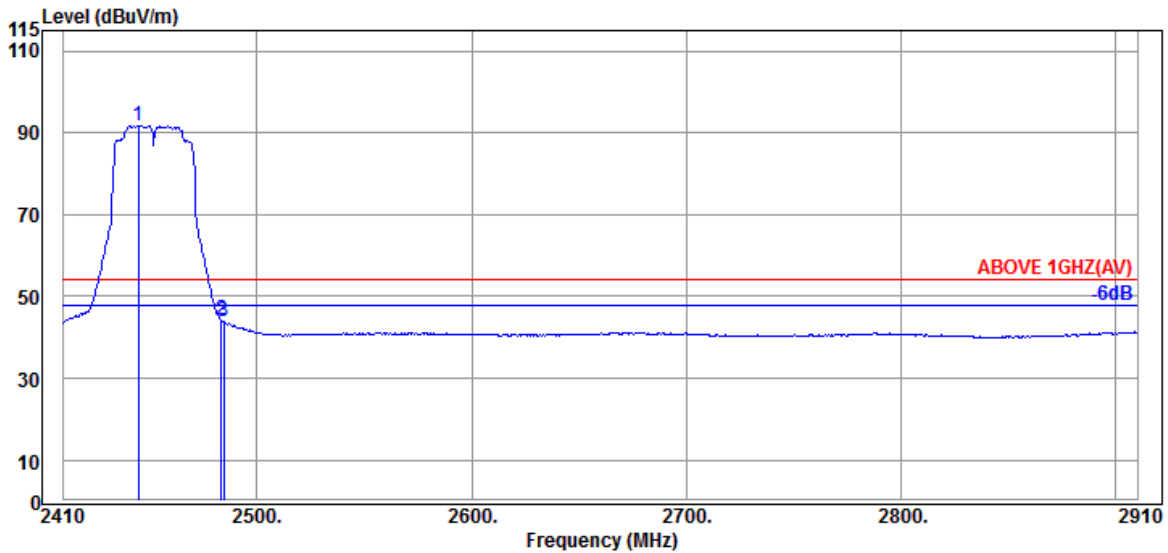


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.000	32.23	7.98	34.55	86.17	91.83	---	---	Average
2483.500	32.30	7.99	34.55	38.42	44.16	54.00	9.84	Average
2484.500	32.30	7.99	34.55	38.13	43.87	54.00	10.13	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

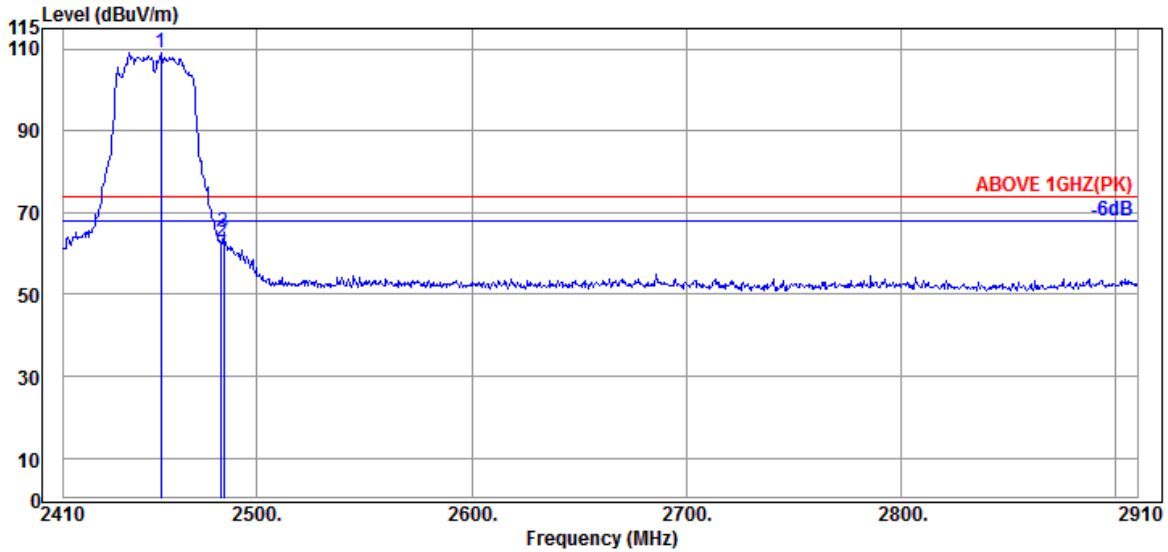

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	32.30	7.98	34.55	103.42	109.15	---	---	Peak
2483.500	32.30	7.99	34.55	57.07	62.81	74.00	11.19	Peak
2484.500	32.30	7.99	34.55	59.48	65.22	74.00	8.78	Peak

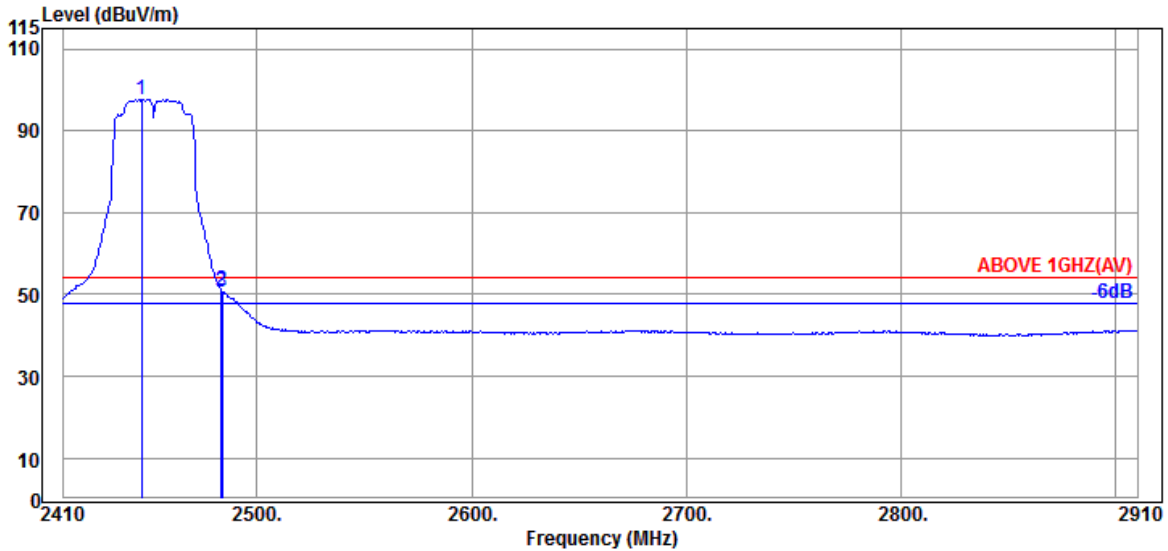


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.500	32.30	7.98	34.55	91.89	97.62	---	---	Average
2483.500	32.30	7.99	34.55	45.29	51.03	54.00	2.97	Average
2484.000	32.30	7.99	34.55	44.92	50.66	54.00	3.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

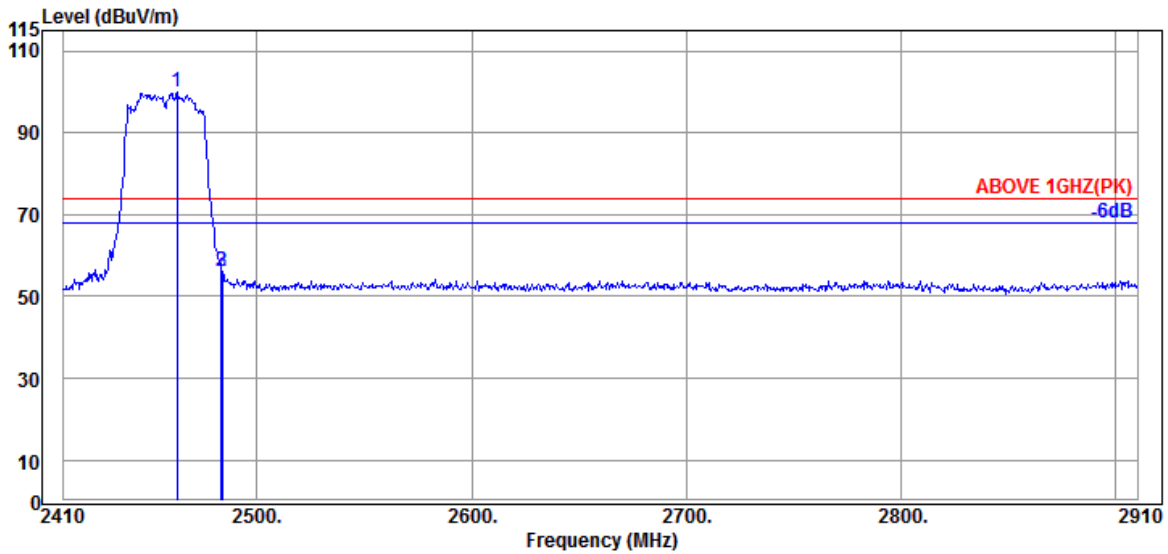

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	32.30	7.98	34.55	94.18	99.91	---	---	Peak
2483.500	32.30	7.99	34.55	50.52	56.26	74.00	17.74	Peak
2484.000	32.30	7.99	34.55	50.41	56.15	74.00	17.85	Peak

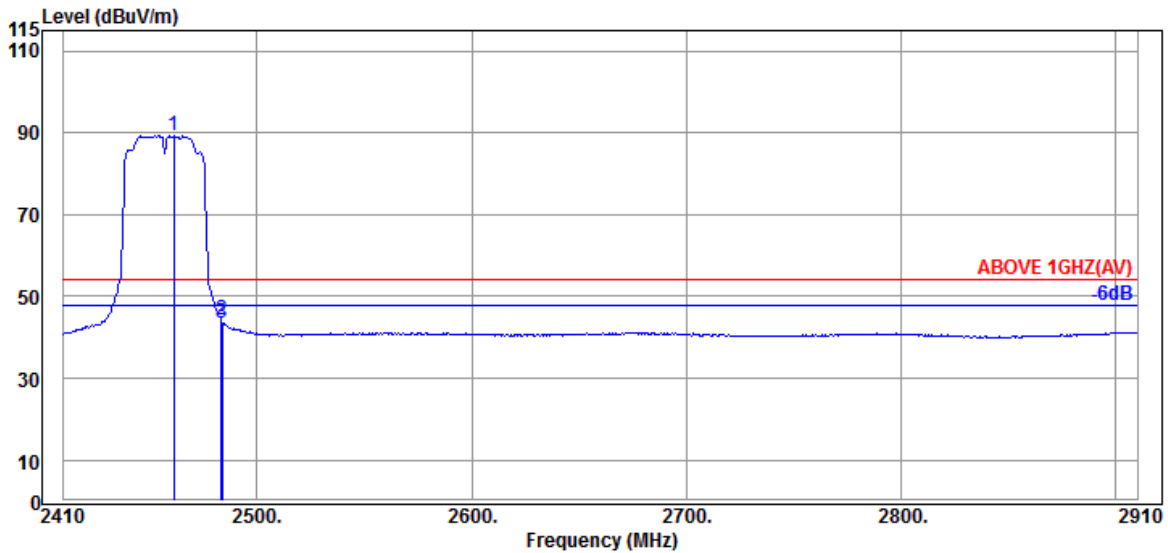


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	32.30	7.98	34.55	83.59	89.32	---	---	Average
2483.500	32.30	7.99	34.55	38.40	44.14	54.00	9.86	Average
2484.000	32.30	7.99	34.55	37.90	43.64	54.00	10.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

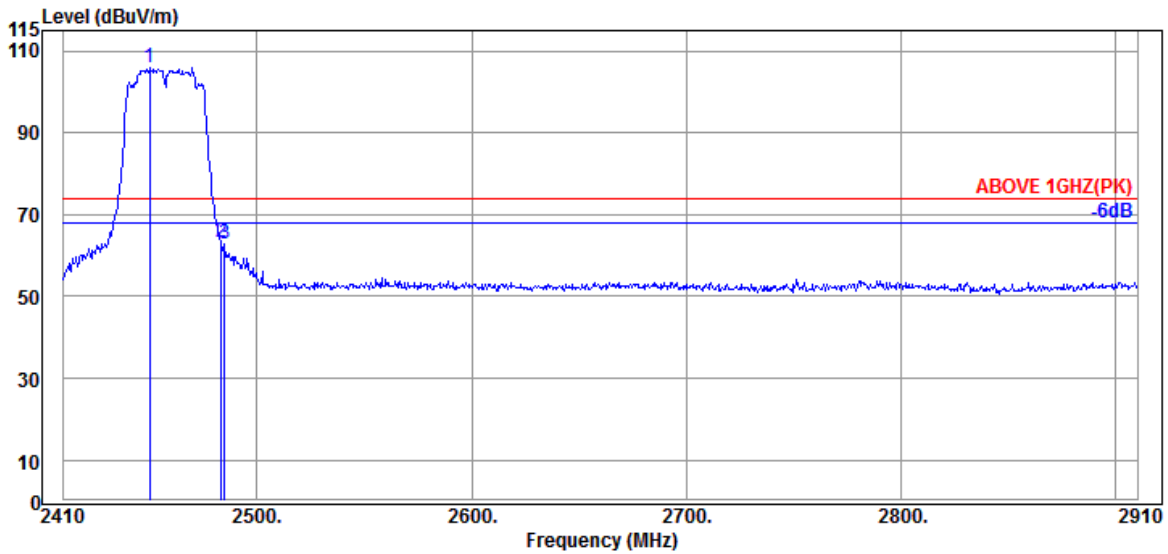

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.000	32.30	7.98	34.55	100.22	105.95	---	---	Peak
2483.500	32.30	7.99	34.55	57.38	63.12	74.00	10.88	Peak
2485.000	32.30	7.99	34.55	57.29	63.03	74.00	10.97	Peak

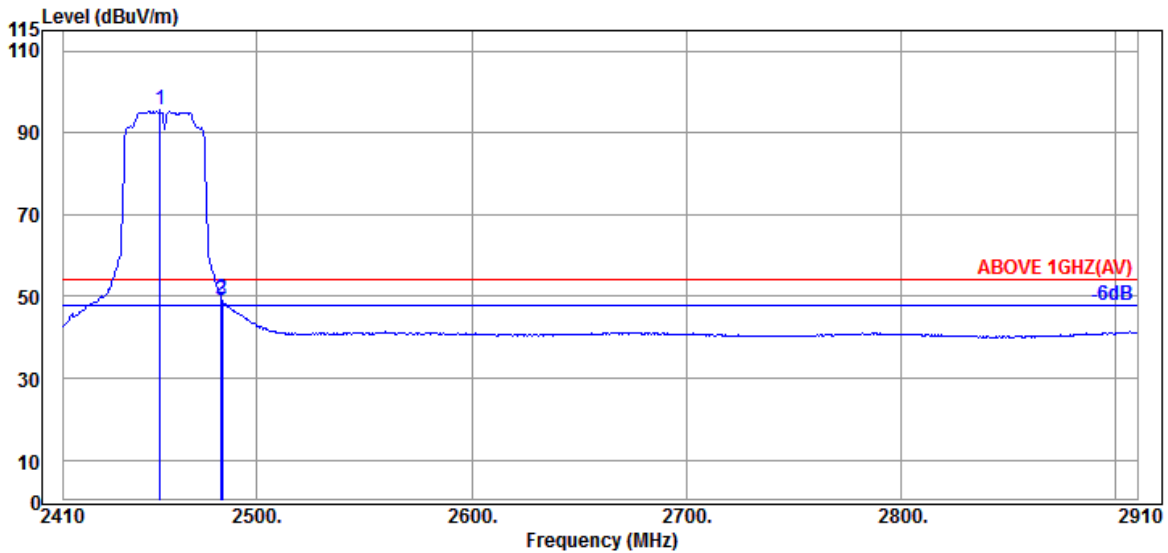


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	89.73	95.46	---	---	Average
2483.500	32.30	7.99	34.55	43.71	49.45	54.00	4.55	Average
2484.000	32.30	7.99	34.55	43.40	49.14	54.00	4.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

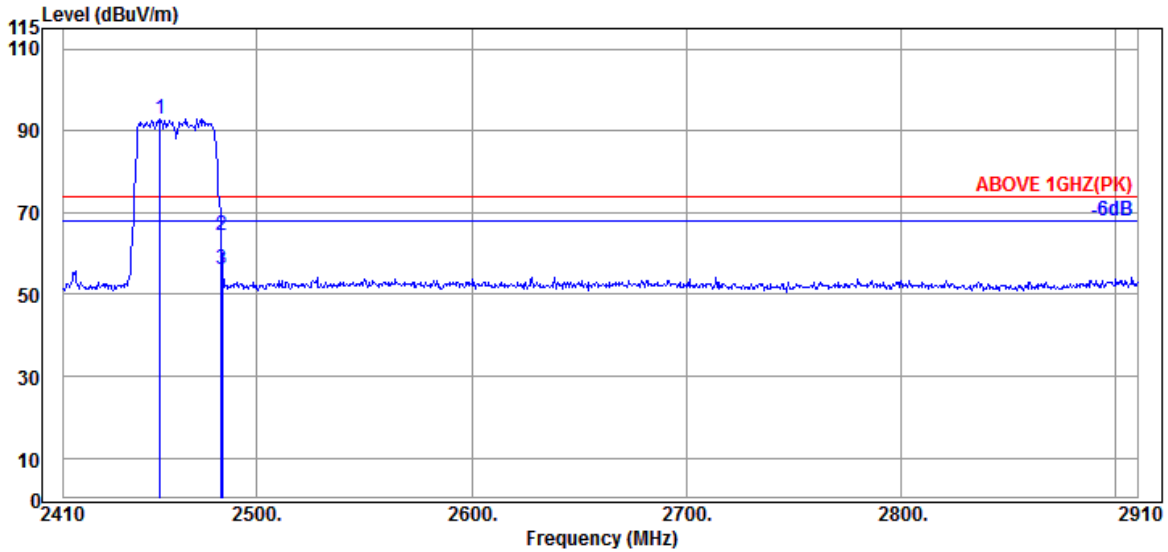

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	87.22	92.95	---	---	Peak
2483.500	32.30	7.99	34.55	58.66	64.40	74.00	9.60	Peak
2484.000	32.30	7.99	34.55	50.39	56.13	74.00	17.87	Peak

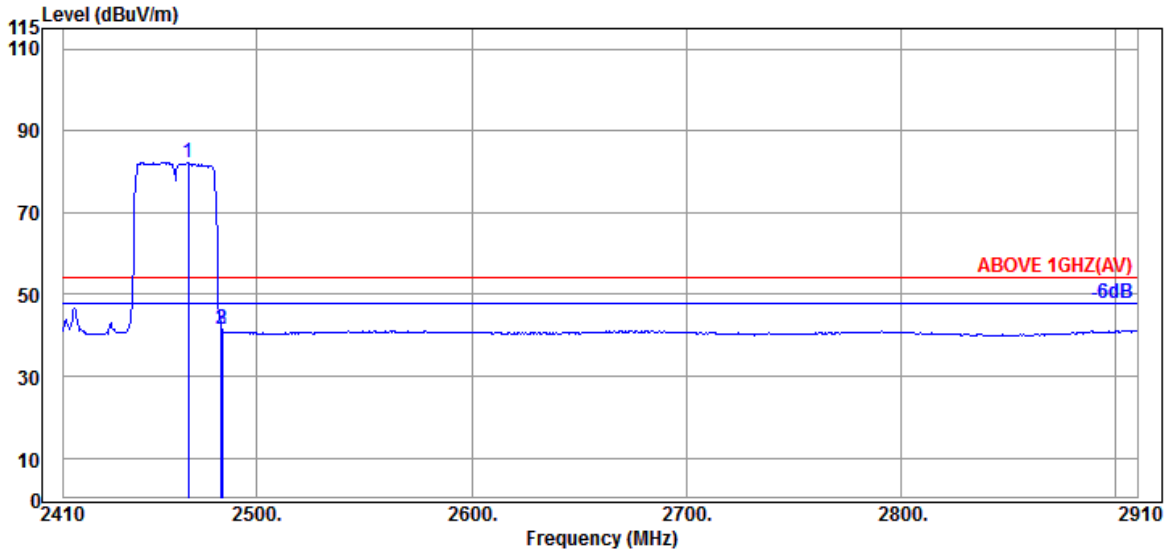


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.000	32.30	7.98	34.55	76.60	82.33	---	---	Average
2483.500	32.30	7.99	34.55	35.92	41.66	54.00	12.34	Average
2484.000	32.30	7.99	34.55	35.66	41.40	54.00	12.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

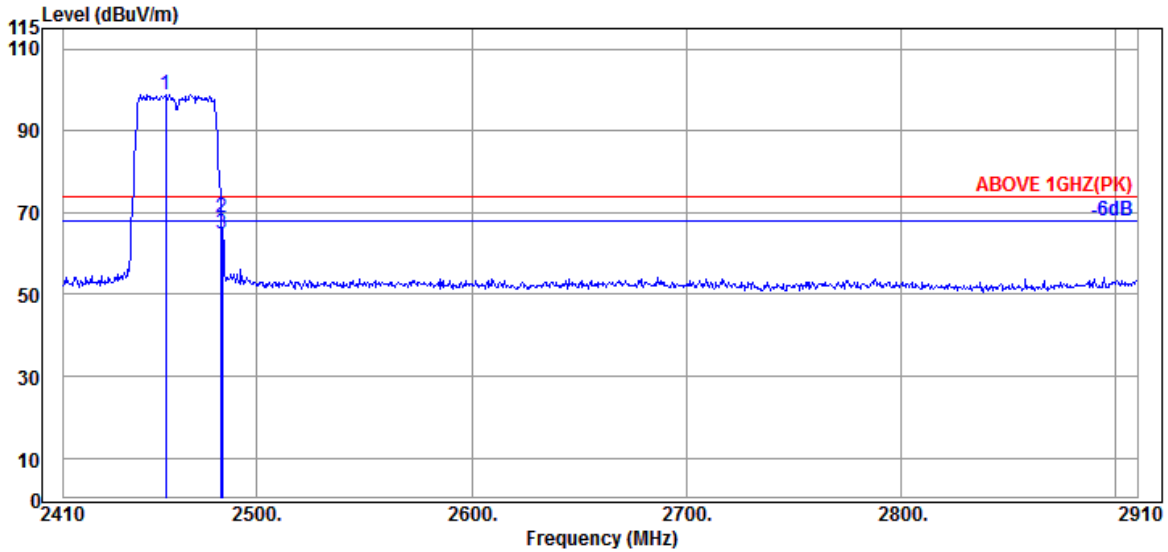

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2457.500	32.30	7.98	34.55	93.13	98.86	---	---	Peak
2483.500	32.30	7.99	34.55	62.94	68.68	74.00	5.32	Peak
2484.000	32.30	7.99	34.55	59.26	65.00	74.00	9.00	Peak

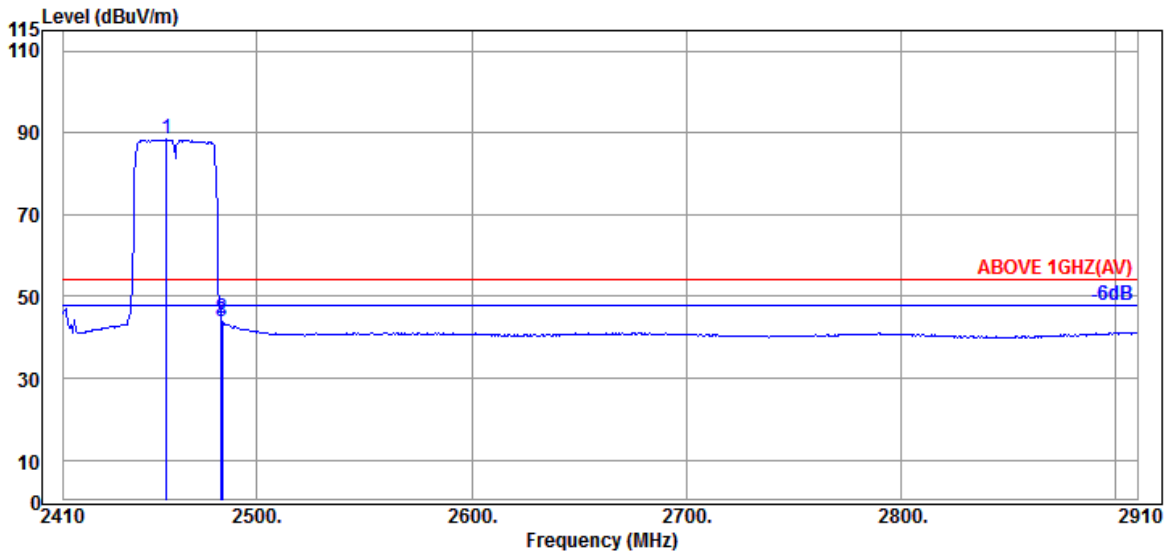


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.000	32.30	7.98	34.55	82.62	88.35	---	---	Average
2483.500	32.30	7.99	34.55	39.00	44.74	54.00	9.26	Average
2484.000	32.30	7.99	34.55	38.25	43.99	54.00	10.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

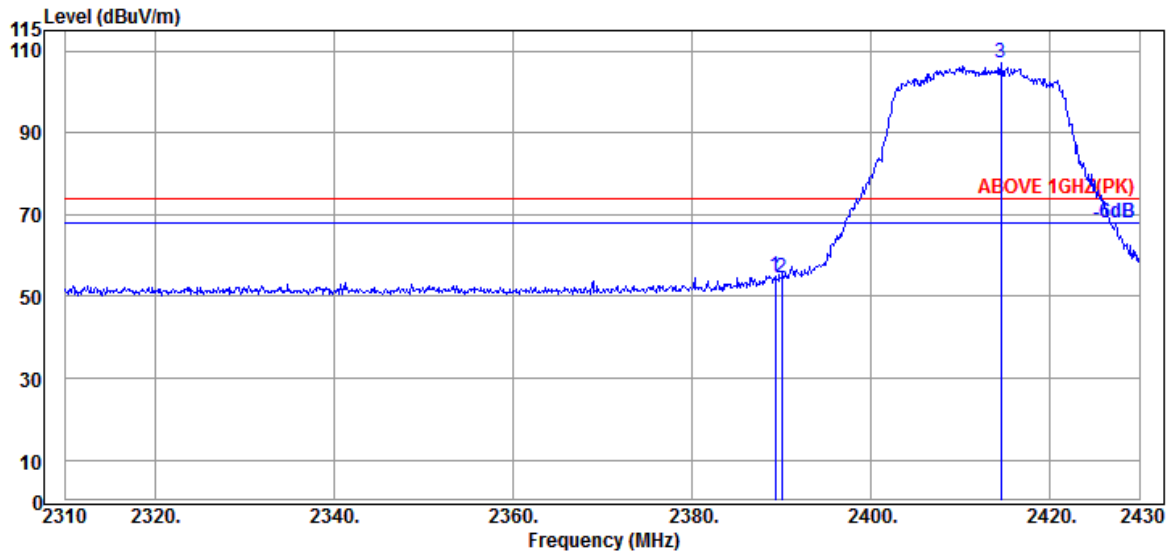

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	31.89	7.95	34.53	49.70	55.01	74.00	18.99	Peak
2390.040	31.89	7.95	34.54	49.37	54.67	74.00	19.33	Peak
@ 2414.520	31.94	7.96	34.54	101.68	107.04	---	---	Peak

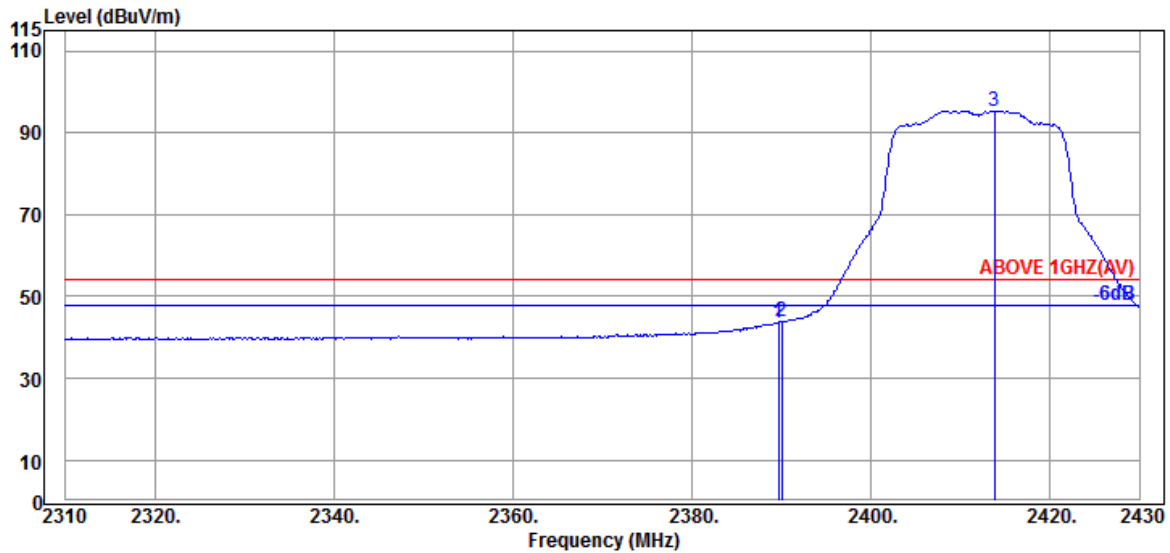


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	38.31	43.62	54.00	10.38	Average
2390.040	31.89	7.95	34.54	38.57	43.87	54.00	10.13	Average
@ 2413.800	31.94	7.96	34.54	90.03	95.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

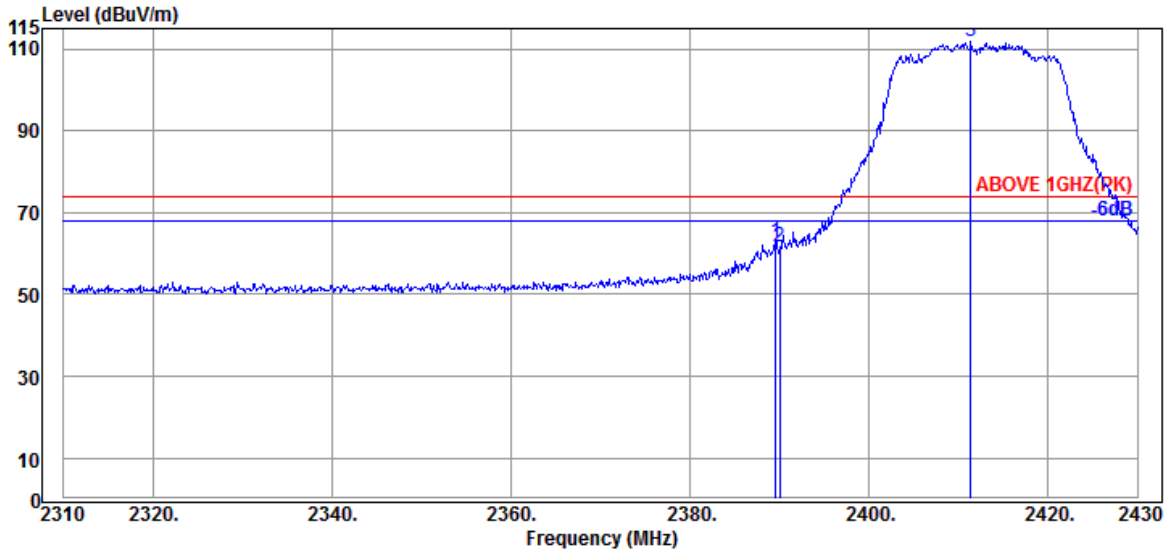

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	57.43	62.74	74.00	11.26	Peak
2390.040	31.89	7.95	34.54	56.53	61.83	74.00	12.17	Peak
@ 2411.400	31.94	7.96	34.54	106.34	111.70	---	---	Peak

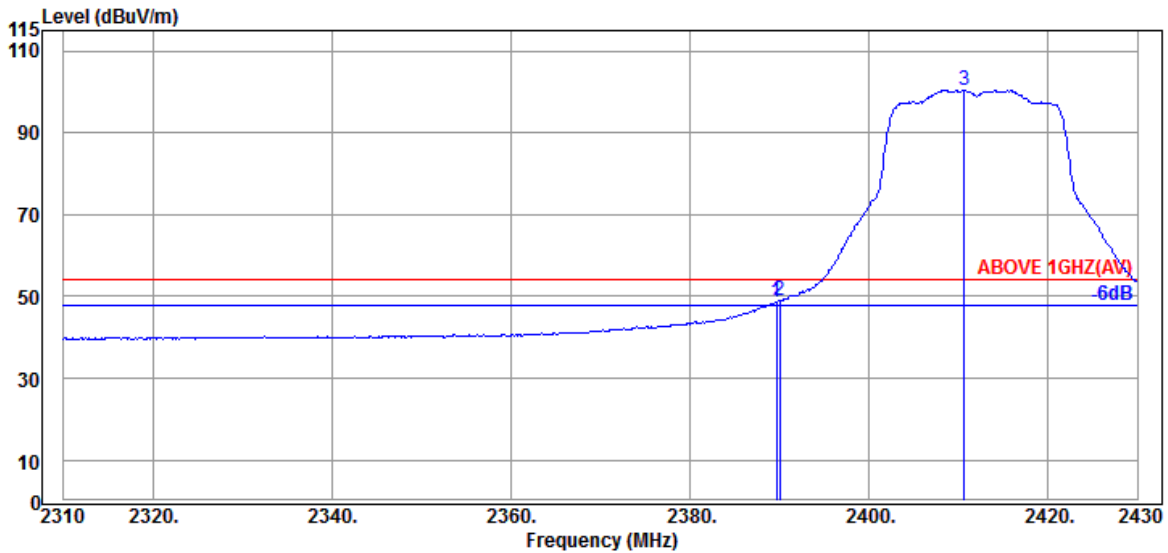


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	43.26	48.57	54.00	5.43	Average
2390.040	31.89	7.95	34.54	43.59	48.89	54.00	5.11	Average
@ 2410.680	31.87	7.96	34.54	95.11	100.40	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

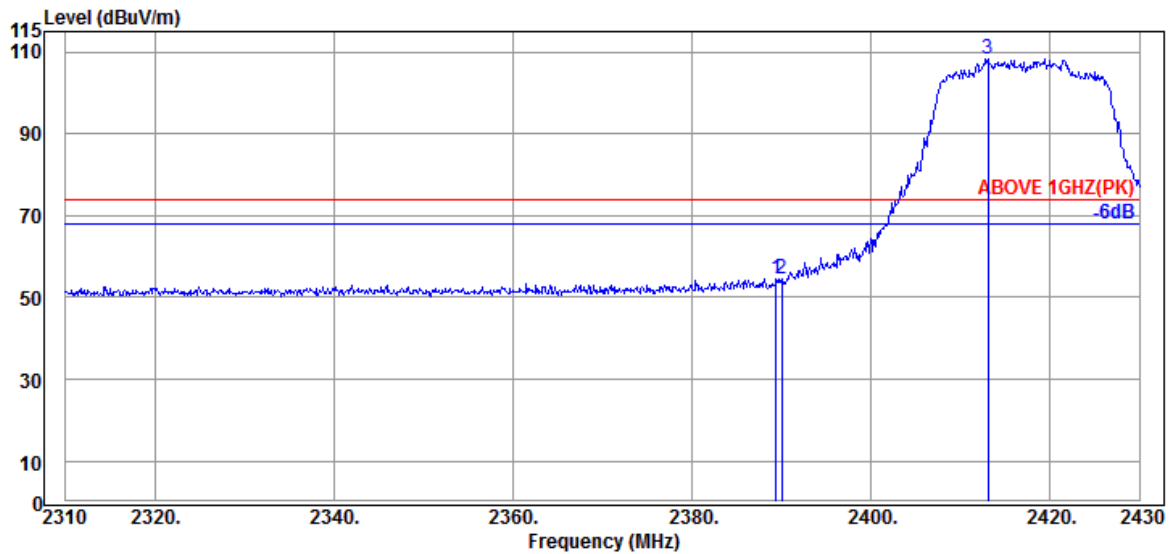

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	49.24	54.55	74.00	19.45	Peak
2390.040	31.89	7.95	34.54	49.31	54.61	74.00	19.39	Peak
@ 2413.080	31.94	7.96	34.54	103.02	108.38	---	---	Peak

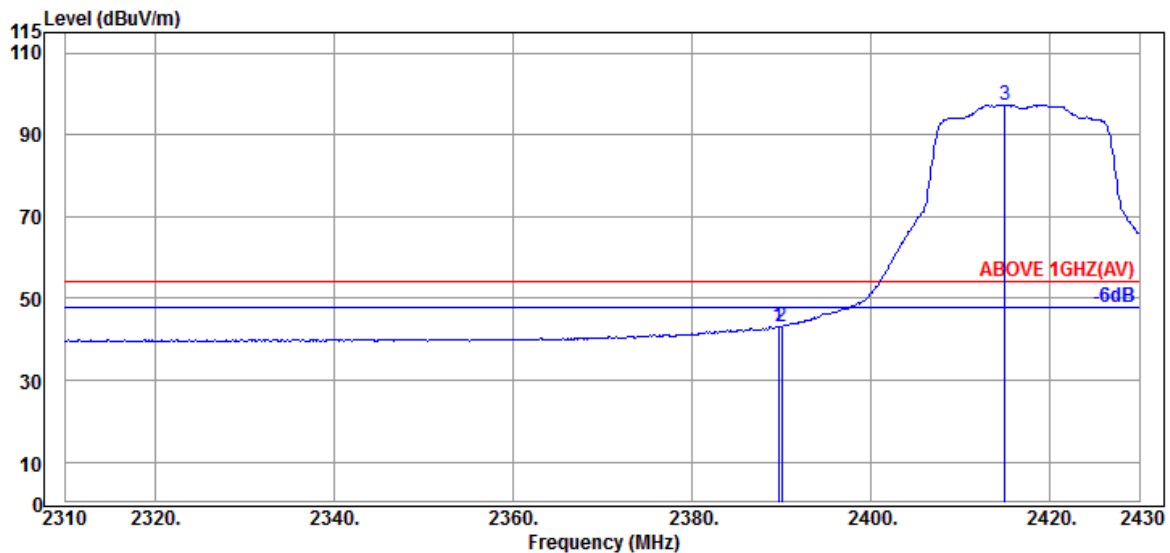


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	37.76	43.07	54.00	10.93	Average
2390.040	31.89	7.95	34.54	37.90	43.20	54.00	10.80	Average
@ 2415.000	31.94	7.96	34.54	91.96	97.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

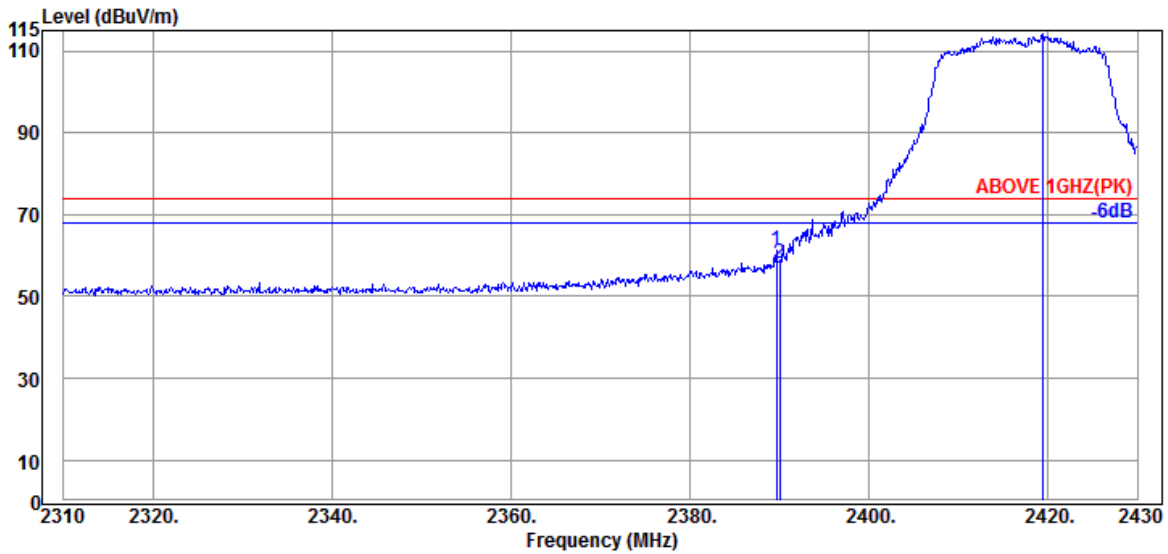

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	55.84	61.15	74.00	12.85	Peak
2390.040	31.89	7.95	34.54	52.91	58.21	74.00	15.79	Peak
@ 2419.440	32.01	7.96	34.54	108.62	114.05	---	---	Peak

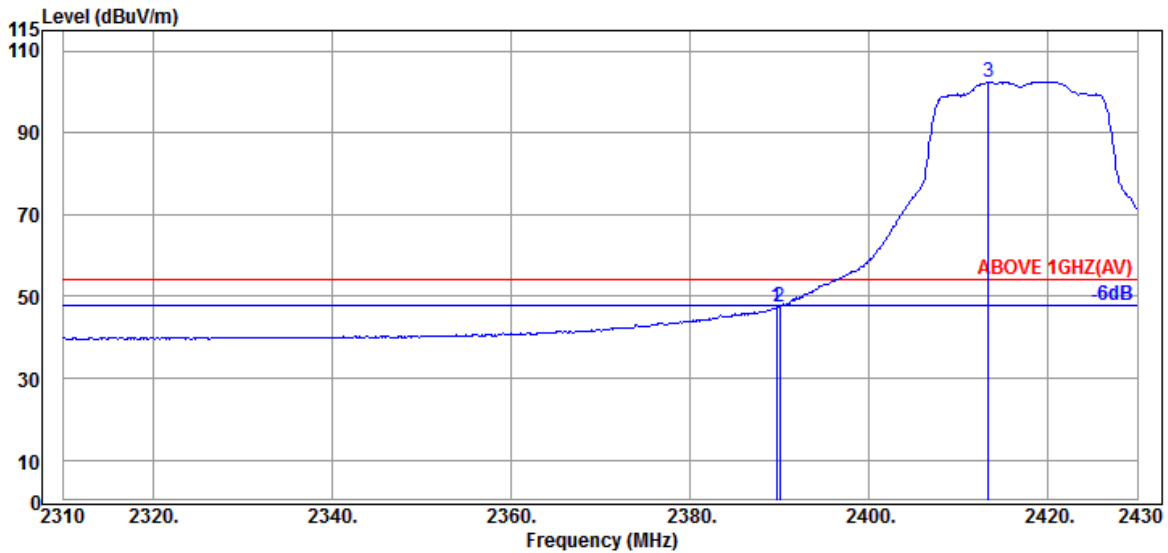


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	42.12	47.43	54.00	6.57	Average
2390.040	31.89	7.95	34.54	42.13	47.43	54.00	6.57	Average
@ 2413.320	31.94	7.96	34.54	97.14	102.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

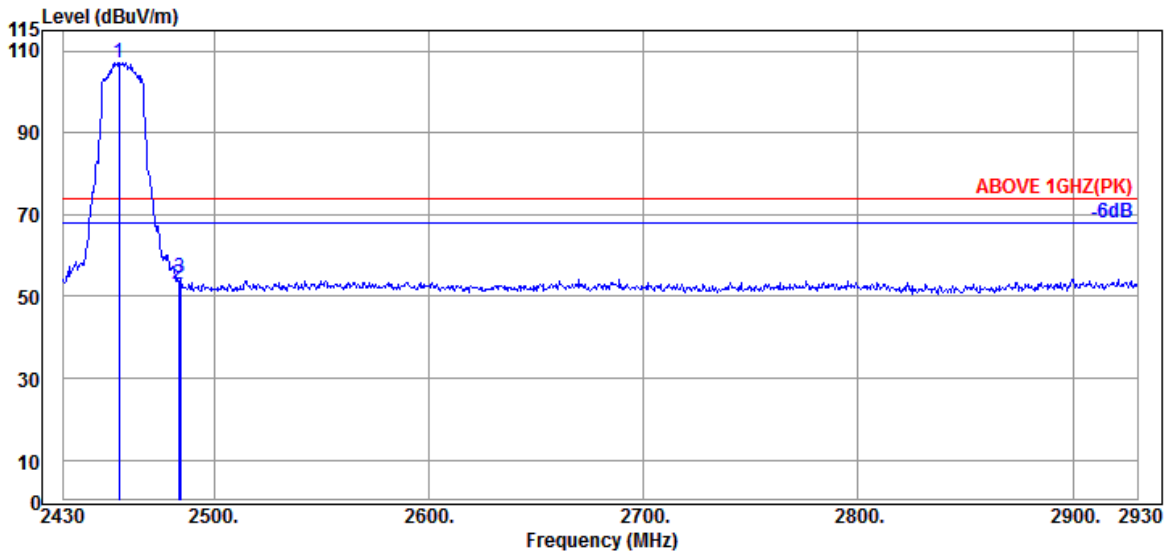

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.30	7.98	34.55	101.55	107.28	---	---	Peak
2483.500	32.30	7.99	34.55	47.31	53.05	74.00	20.95	Peak
2484.500	32.30	7.99	34.55	48.64	54.38	74.00	19.62	Peak

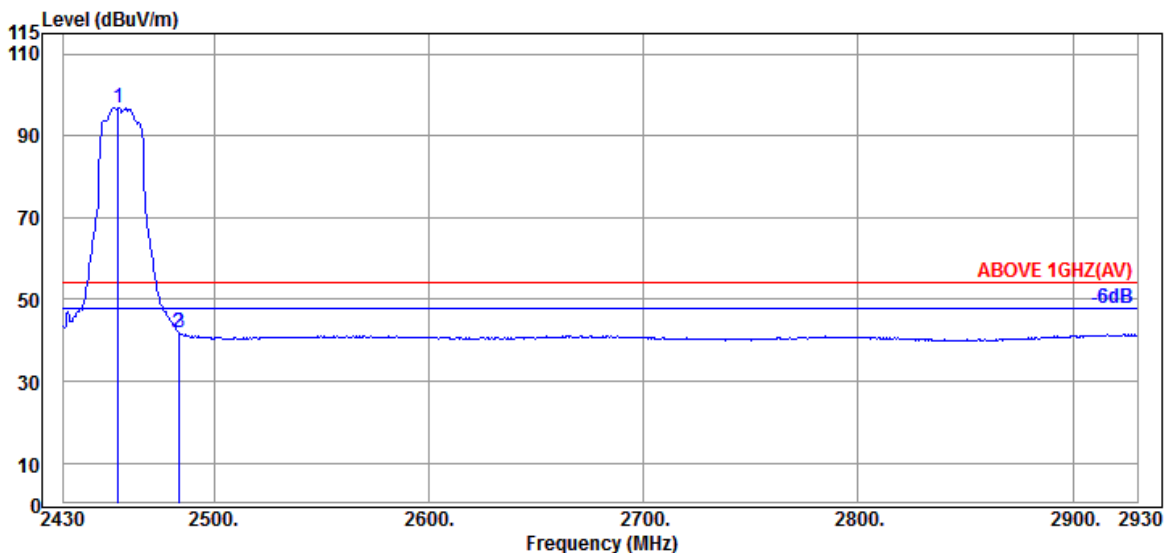


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	32.30	7.98	34.55	91.07	96.80	---	---	Average
2483.500	32.30	7.99	34.55	36.28	42.02	54.00	11.98	Average
2484.000	32.30	7.99	34.55	36.24	41.98	54.00	12.02	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

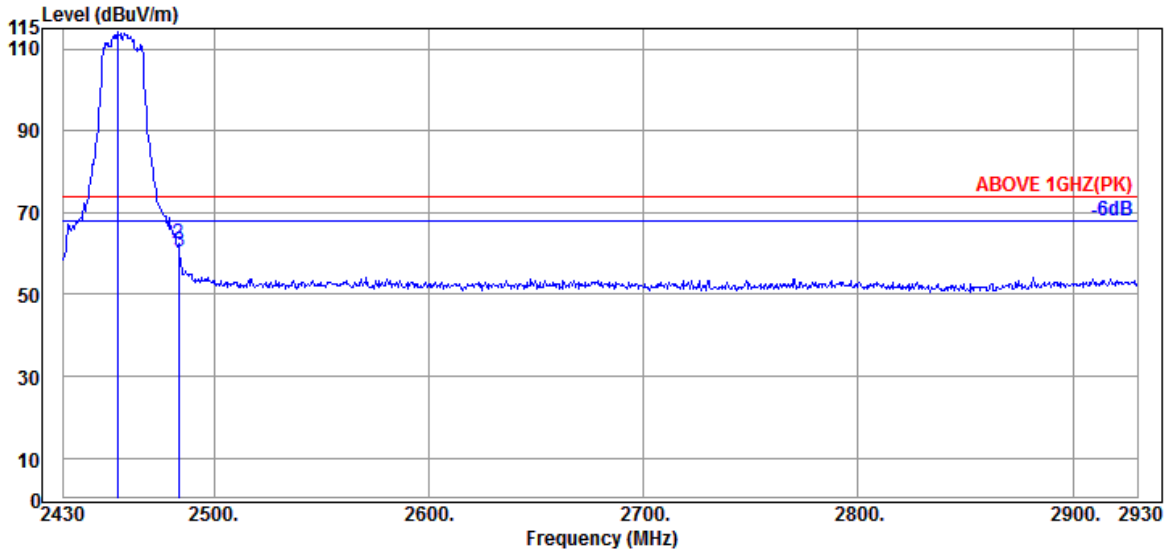

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	108.67	114.40	---	---	Peak
2483.500	32.30	7.99	34.55	56.87	62.61	74.00	11.39	Peak
2484.000	32.30	7.99	34.55	54.86	60.60	74.00	13.40	Peak

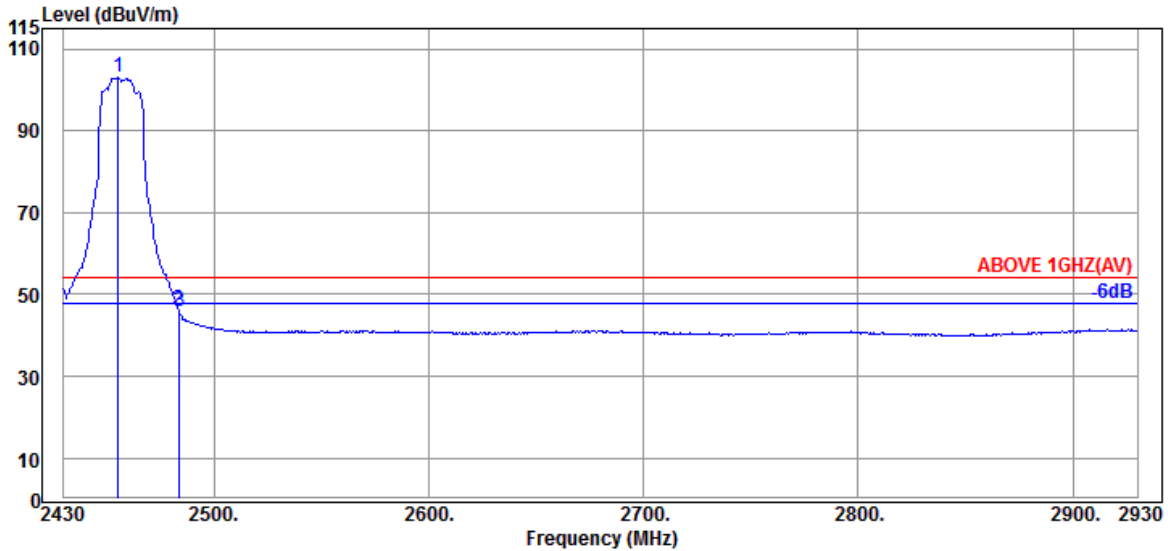


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.500	32.30	7.98	34.55	97.25	102.98	---	---	Average
2483.500	32.30	7.99	34.55	40.61	46.35	54.00	7.65	Average
2484.000	32.30	7.99	34.55	40.29	46.03	54.00	7.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

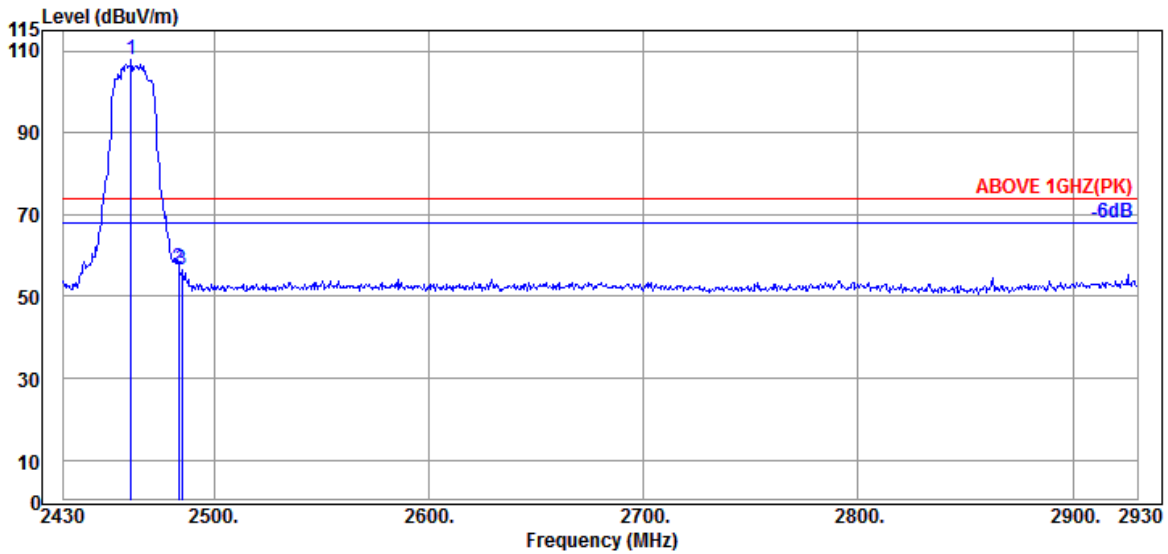

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	32.30	7.98	34.55	102.14	107.87	---	---	Peak
2483.500	32.30	7.99	34.55	51.27	57.01	74.00	16.99	Peak
2485.000	32.30	7.99	34.55	50.58	56.32	74.00	17.68	Peak

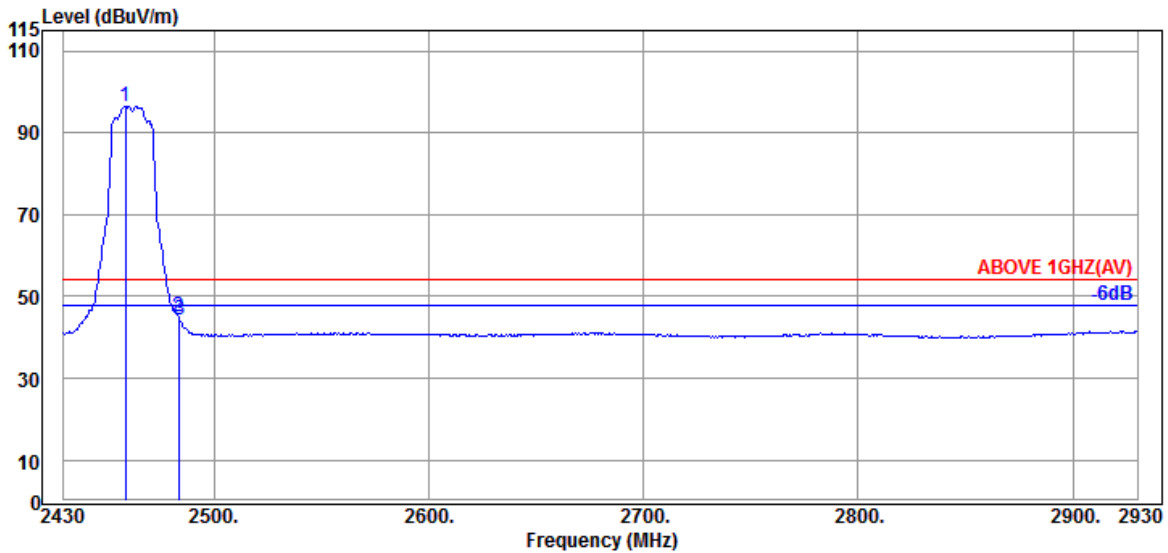


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	90.86	96.59	---	---	Average
2483.500	32.30	7.99	34.55	39.14	44.88	54.00	9.12	Average
2484.000	32.30	7.99	34.55	38.51	44.25	54.00	9.75	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

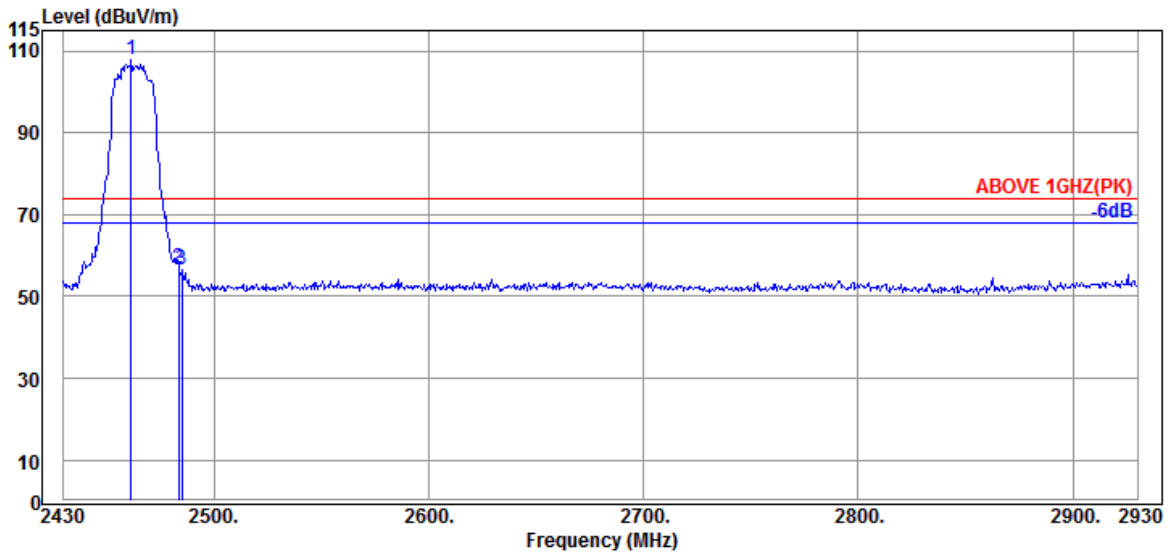

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.500	32.30	7.98	34.55	102.14	107.87	---	---	Peak
2483.500	32.30	7.99	34.55	51.27	57.01	74.00	16.99	Peak
2485.000	32.30	7.99	34.55	50.58	56.32	74.00	17.68	Peak

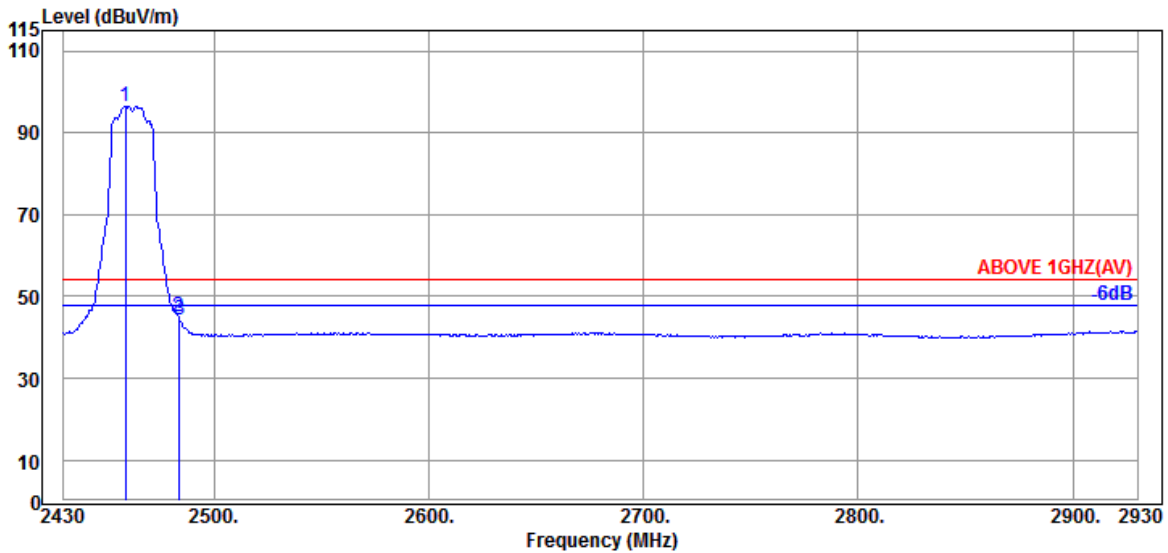


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.000	32.30	7.98	34.55	90.86	96.59	---	---	Average
2483.500	32.30	7.99	34.55	39.14	44.88	54.00	9.12	Average
2484.000	32.30	7.99	34.55	38.51	44.25	54.00	9.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

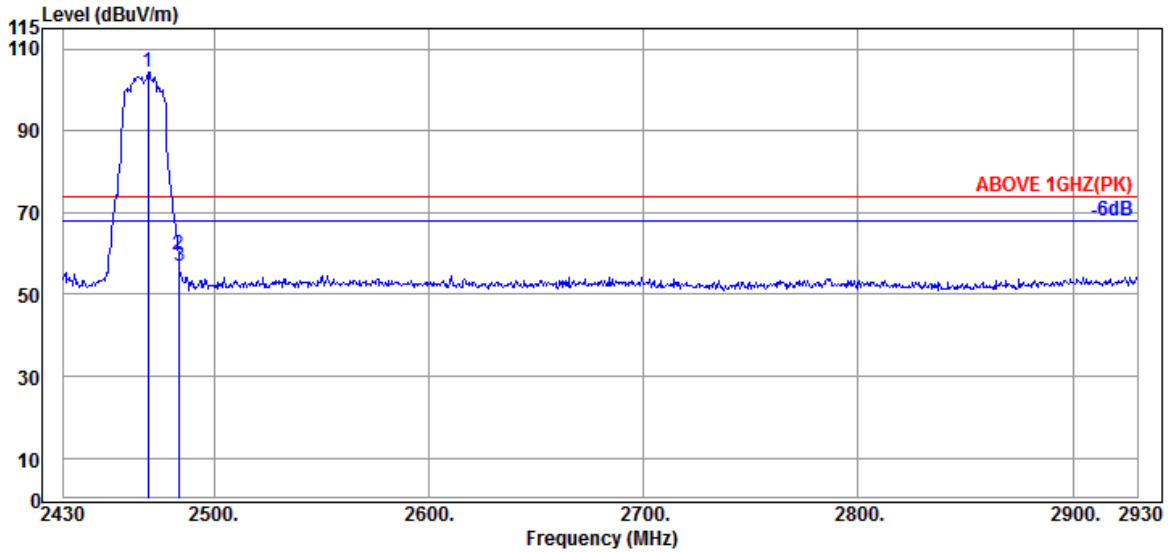

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	32.30	7.98	34.55	98.71	104.44	---	---	Peak
2483.500	32.30	7.99	34.55	53.96	59.70	74.00	14.30	Peak
2484.000	32.30	7.99	34.55	51.06	56.80	74.00	17.20	Peak

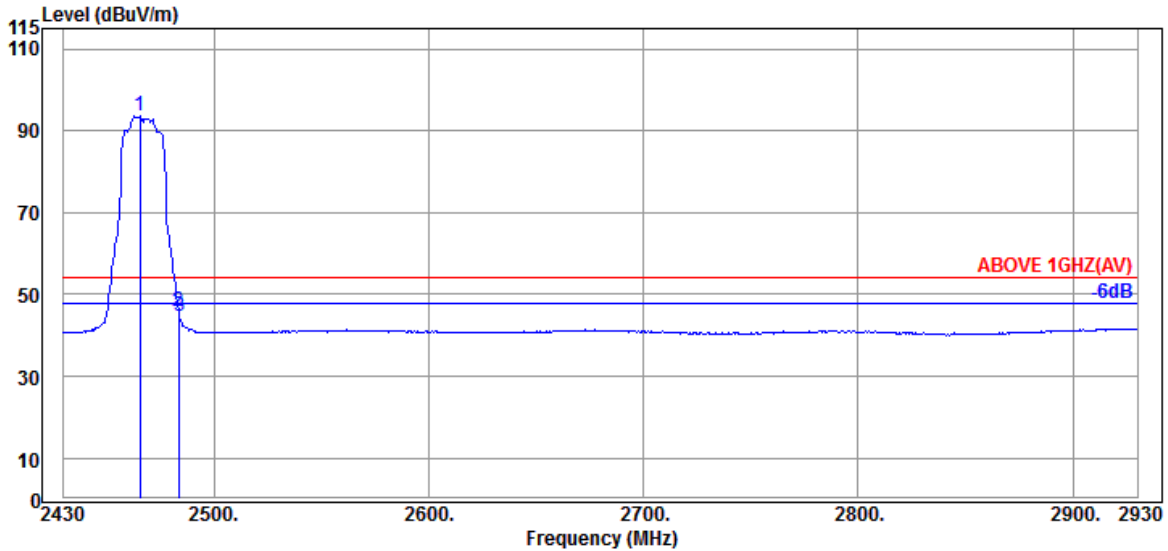


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	87.79	93.52	---	---	Average
2483.500	32.30	7.99	34.55	40.17	45.91	54.00	8.09	Average
2484.000	32.30	7.99	34.55	38.96	44.70	54.00	9.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

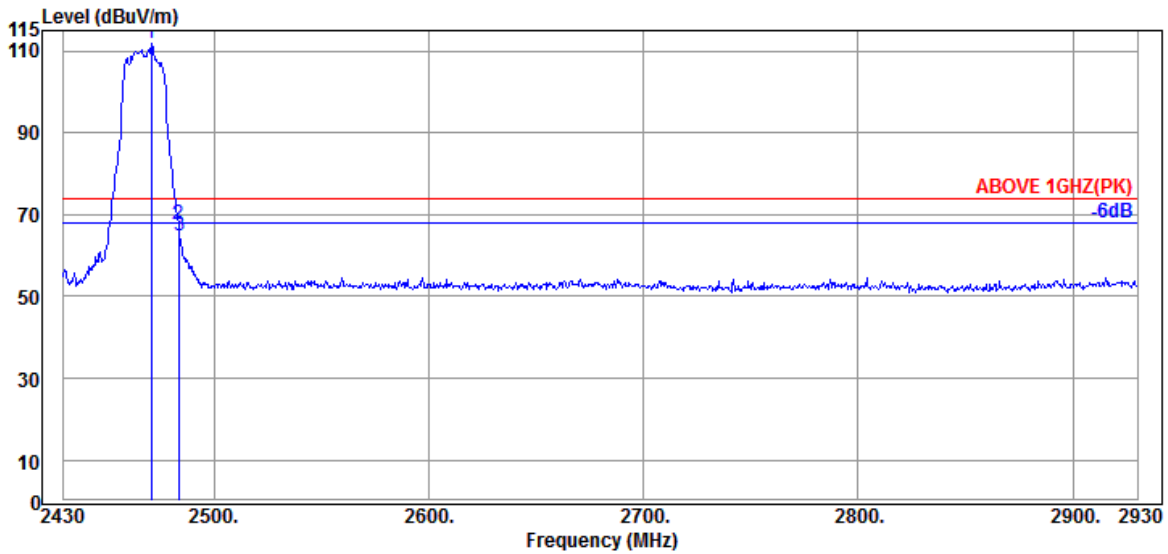

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.30	7.99	34.55	106.13	111.87	---	---	Peak
2483.500	32.30	7.99	34.55	61.90	67.64	74.00	6.36	Peak
2484.000	32.30	7.99	34.55	59.26	65.00	74.00	9.00	Peak

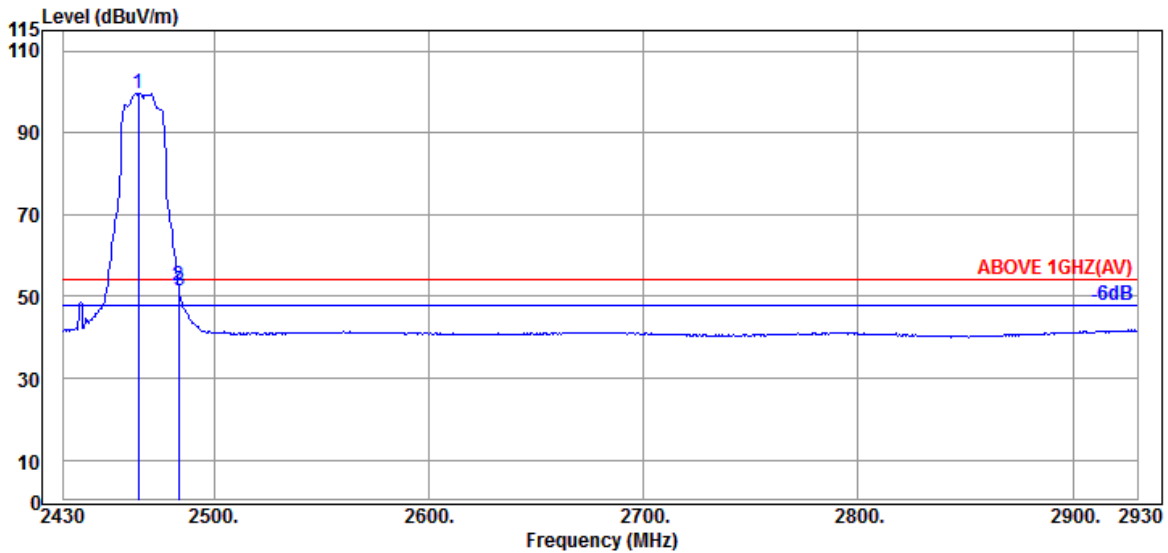


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.30	7.98	34.55	93.90	99.63	---	---	Average
2483.500	32.30	7.99	34.55	46.71	52.45	54.00	1.55	Average
2484.000	32.30	7.99	34.55	45.74	51.48	54.00	2.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

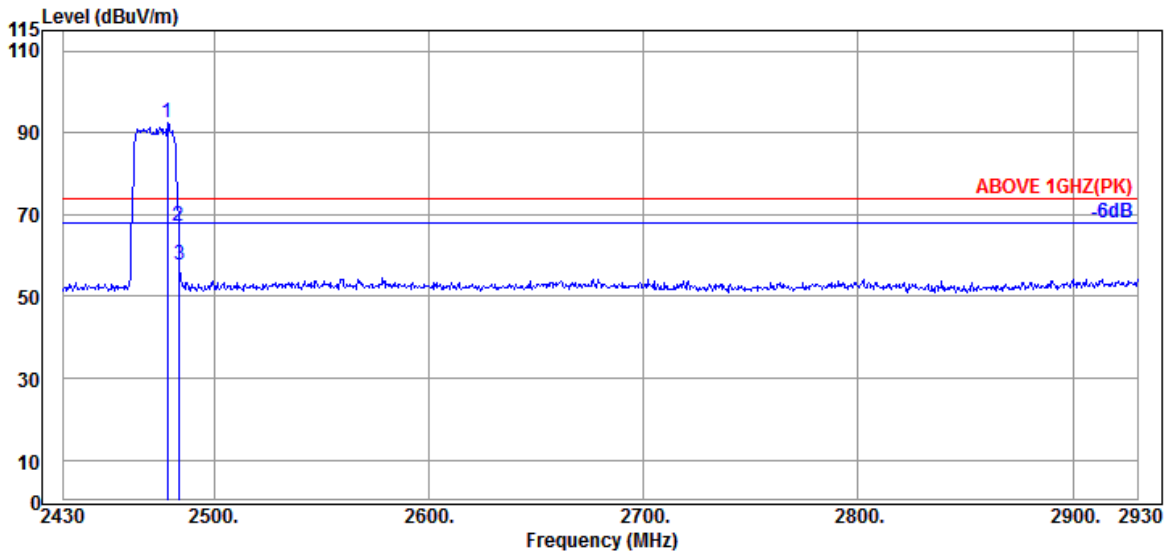

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	86.58	92.32	---	---	Peak
2483.500	32.30	7.99	34.55	61.43	67.17	74.00	6.83	Peak
2484.000	32.30	7.99	34.55	52.03	57.77	74.00	16.23	Peak

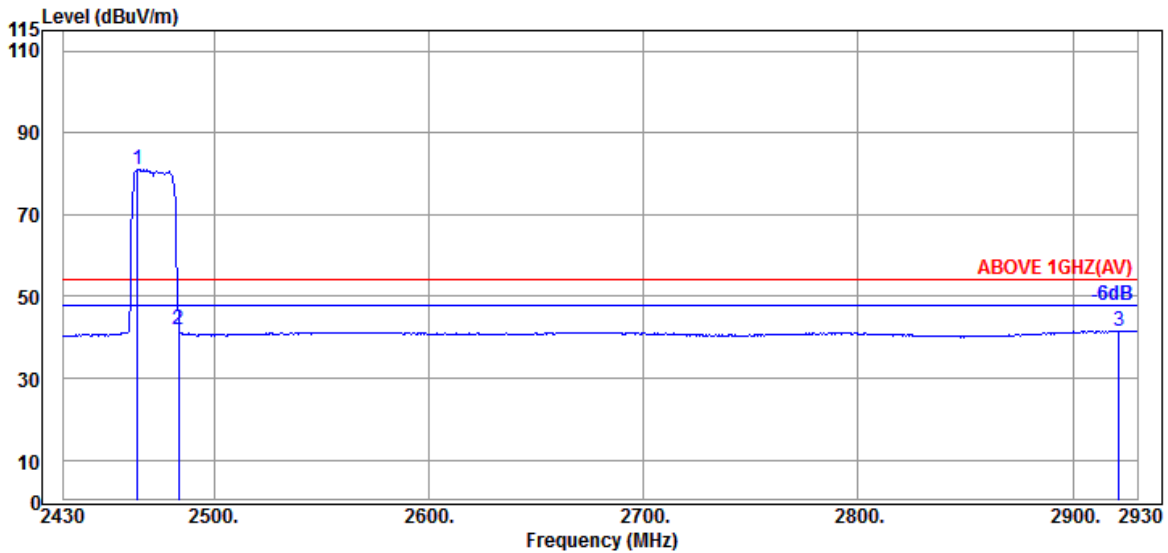


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	75.33	81.06	---	---	Average
2483.500	32.30	7.99	34.55	36.30	42.04	54.00	11.96	Average
2921.500	32.90	8.19	34.64	35.19	41.64	54.00	12.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

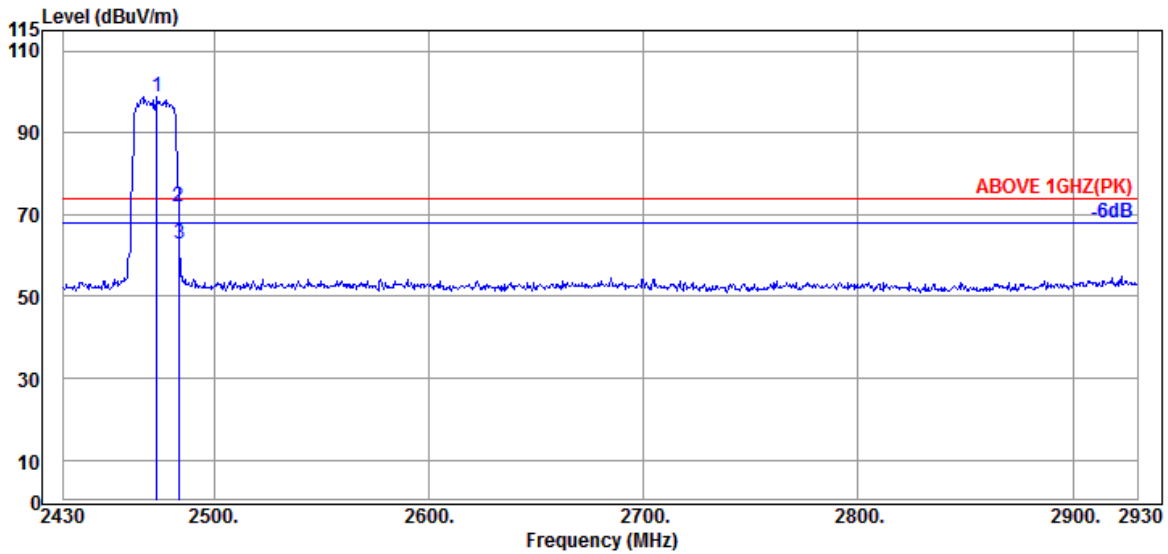

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.500	32.30	7.99	34.55	93.05	98.79	---	---	Peak
2483.500	32.30	7.99	34.55	66.12	71.86	74.00	2.14	Peak
2484.000	32.30	7.99	34.55	56.97	62.71	74.00	11.29	Peak

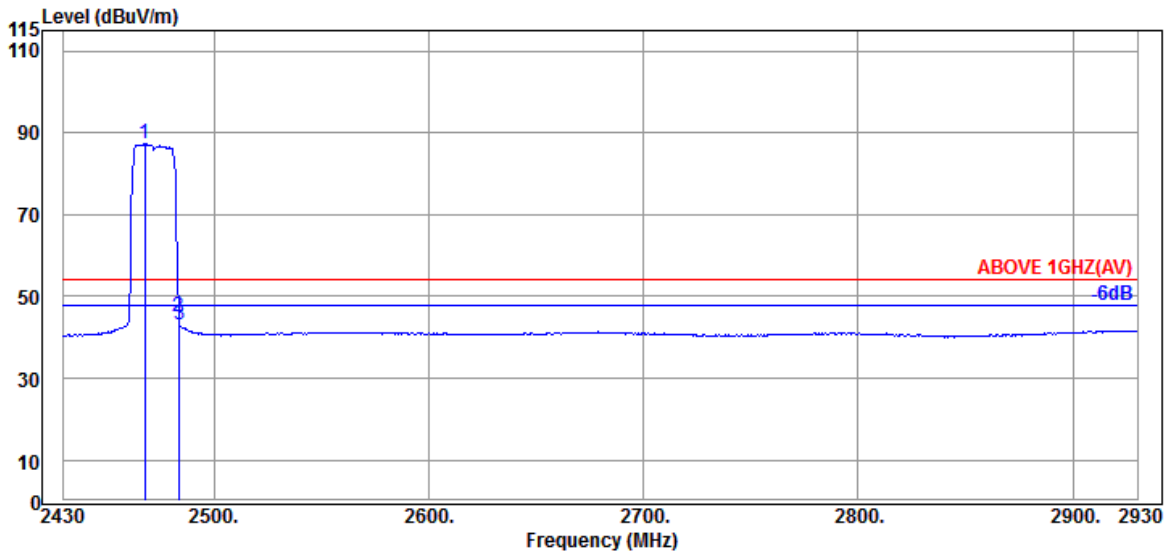


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	32.30	7.98	34.55	81.70	87.43	---	---	Average
2483.500	32.30	7.99	34.55	39.31	45.05	54.00	8.95	Average
2484.000	32.30	7.99	34.55	37.38	43.12	54.00	10.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

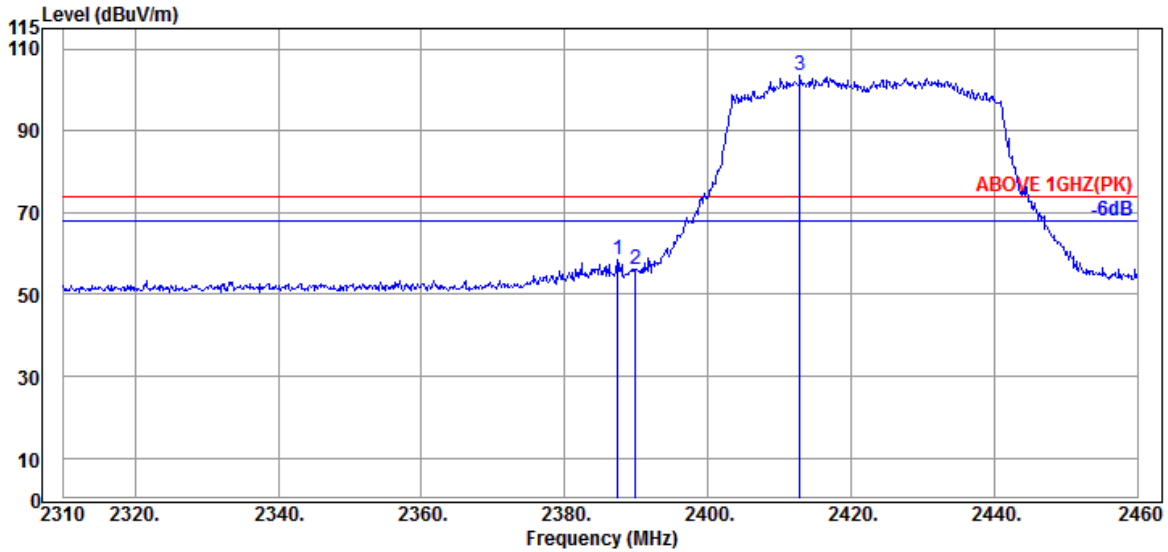

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.400	31.89	7.95	34.53	53.16	58.47	74.00	15.53	Peak
2389.950	31.89	7.95	34.54	50.77	56.07	74.00	17.93	Peak
@ 2412.900	31.94	7.96	34.54	98.03	103.39	---	---	Peak

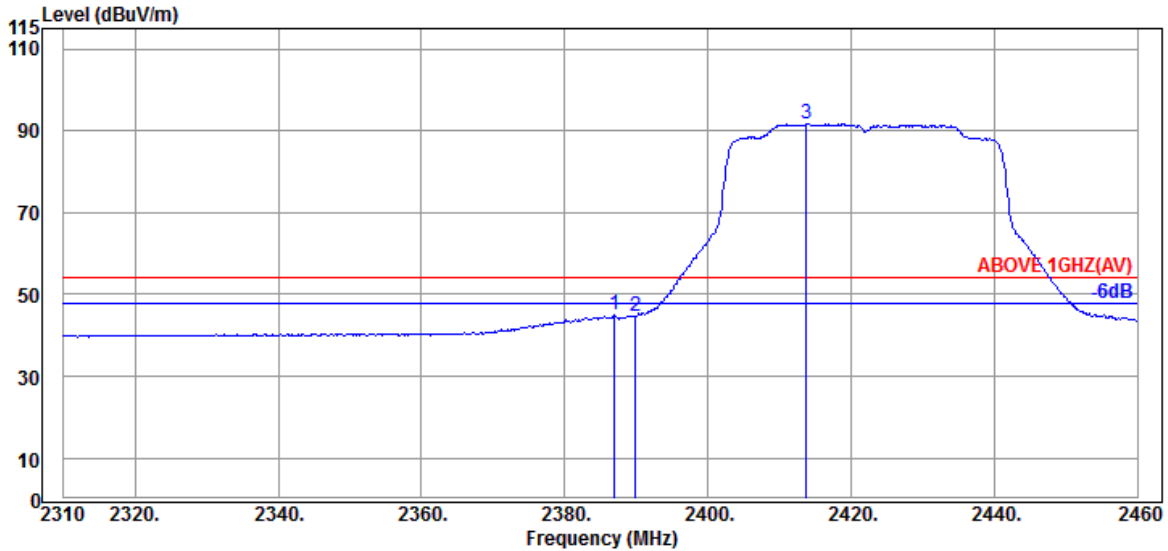


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.950	31.89	7.95	34.53	39.58	44.89	54.00	9.11	Average
2389.950	31.89	7.95	34.54	39.49	44.79	54.00	9.21	Average
@ 2413.800	31.94	7.96	34.54	86.36	91.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

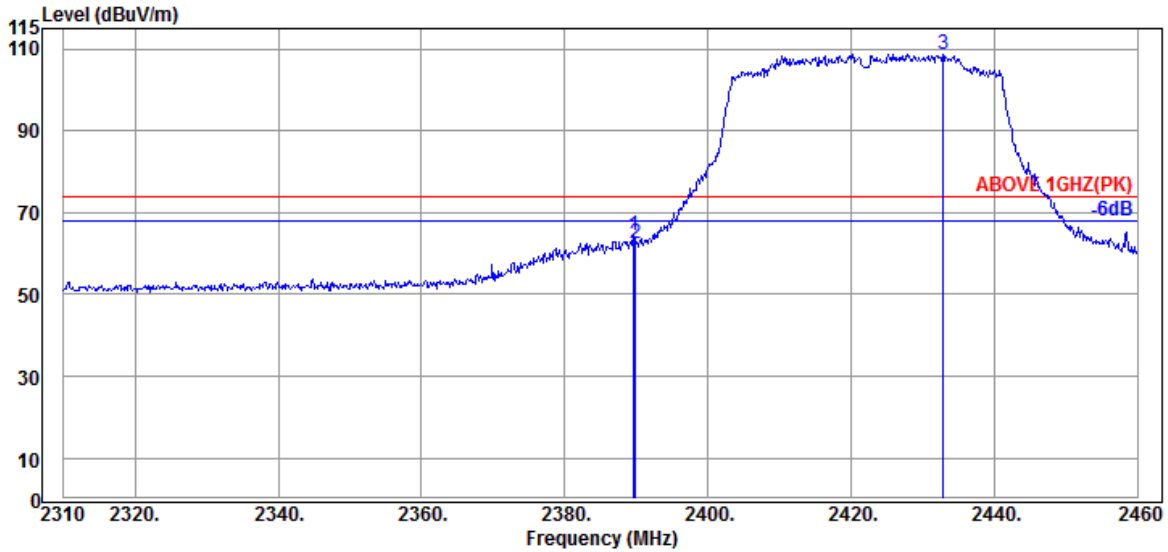

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	59.14	64.45	74.00	9.55	Peak
2389.950	31.89	7.95	34.54	57.33	62.63	74.00	11.37	Peak
@ 2432.850	32.16	7.97	34.54	103.25	108.84	---	---	Peak

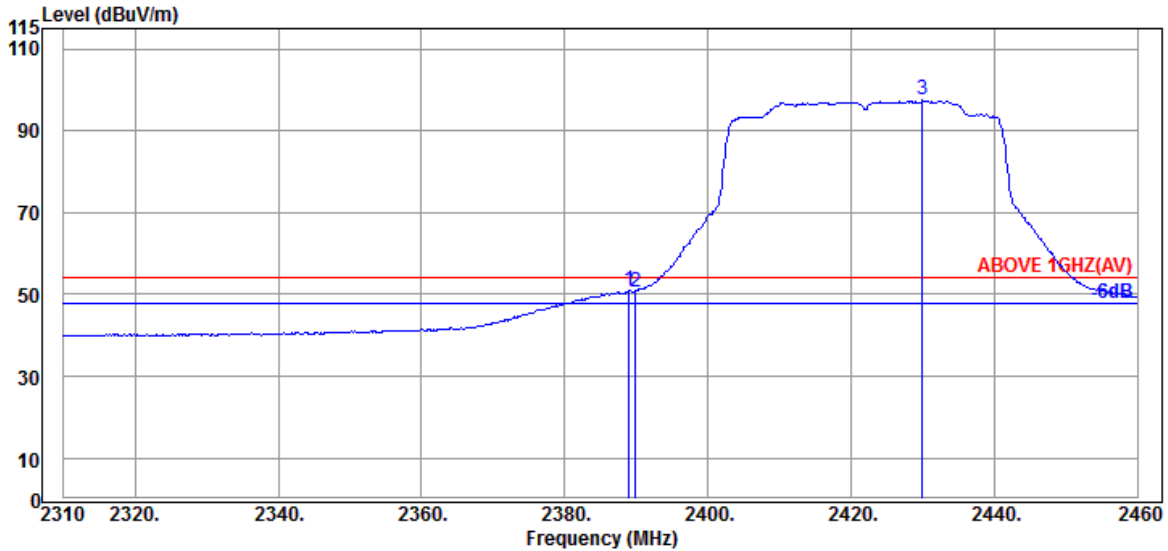


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	31.89	7.95	34.53	45.56	50.87	54.00	3.13	Average
2389.950	31.89	7.95	34.54	45.47	50.77	54.00	3.23	Average
@ 2430.000	32.09	7.97	34.54	91.90	97.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

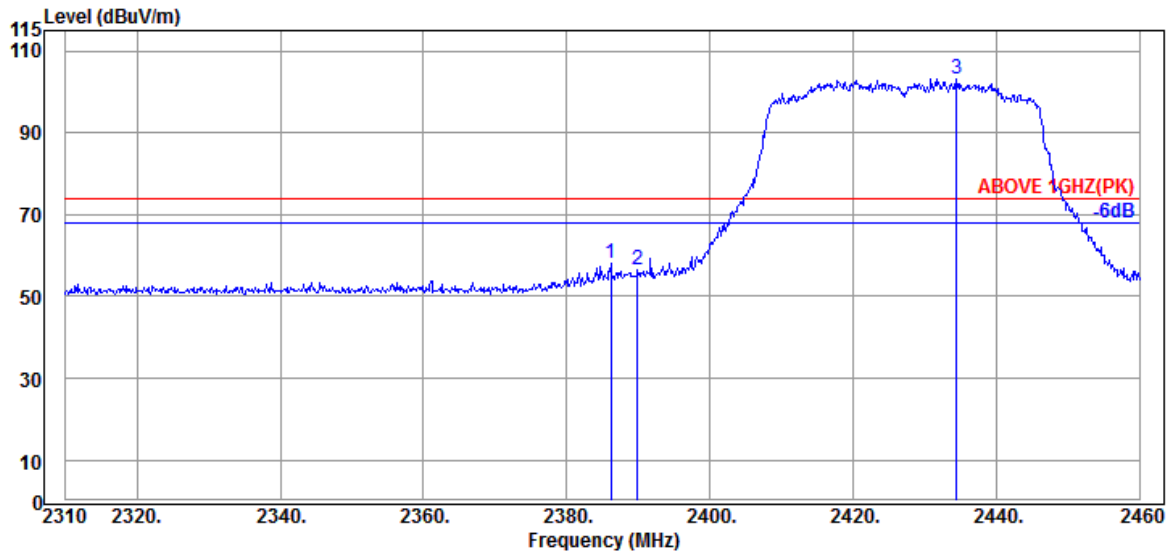

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	31.89	7.95	34.53	52.87	58.18	74.00	15.82	Peak
2389.950	31.89	7.95	34.54	51.14	56.44	74.00	17.56	Peak
@ 2434.500	32.16	7.97	34.54	97.74	103.33	---	---	Peak

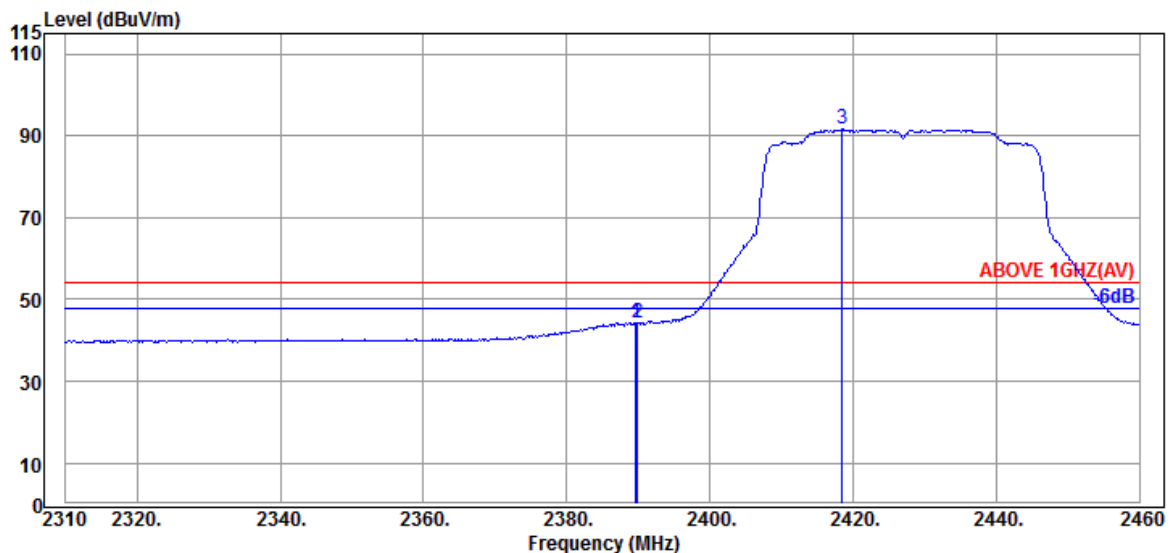


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	38.92	44.23	54.00	9.77	Average
2389.950	31.89	7.95	34.54	38.89	44.19	54.00	9.81	Average
@ 2418.450	32.01	7.96	34.54	86.11	91.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

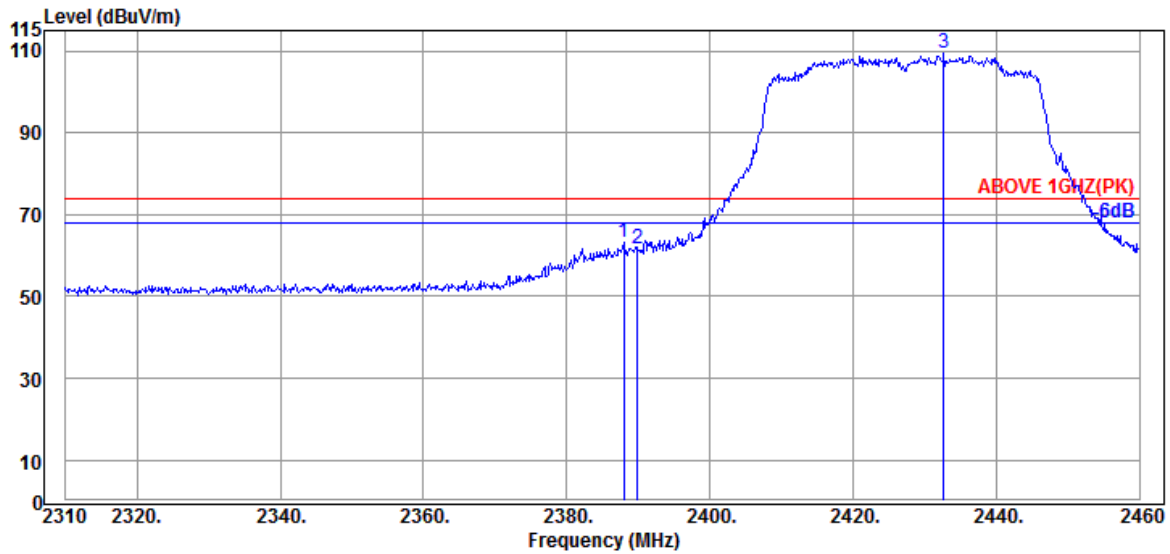

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.000	31.89	7.95	34.53	58.06	63.37	74.00	10.63	Peak
2389.950	31.89	7.95	34.54	56.42	61.72	74.00	12.28	Peak
@ 2432.700	32.16	7.97	34.54	103.87	109.46	---	---	Peak

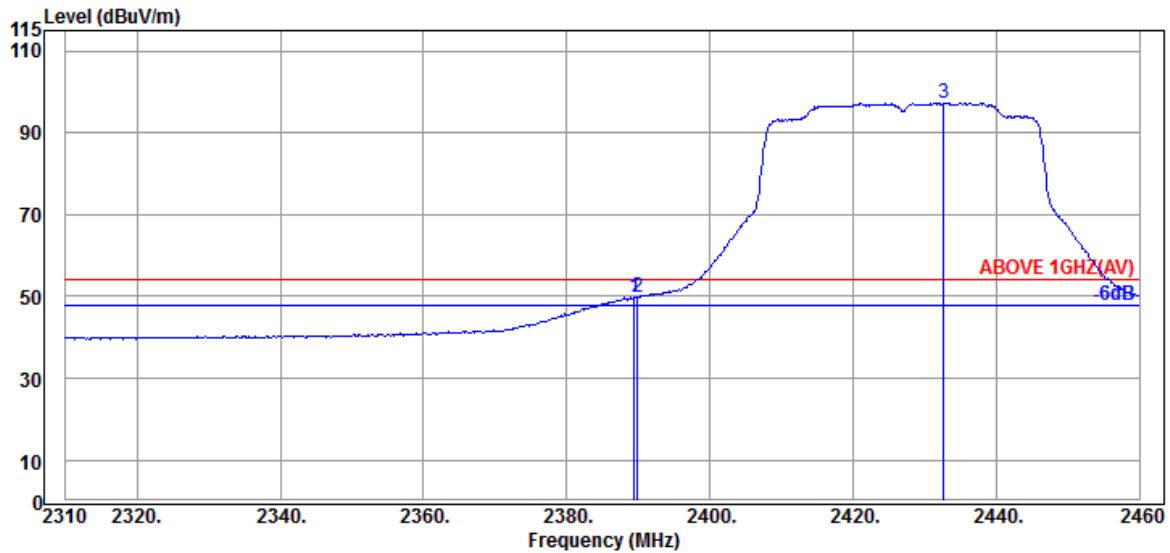


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	31.89	7.95	34.53	44.54	49.85	54.00	4.15	Average
2389.950	31.89	7.95	34.54	44.51	49.81	54.00	4.19	Average
@ 2432.700	32.16	7.97	34.54	91.69	97.28	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

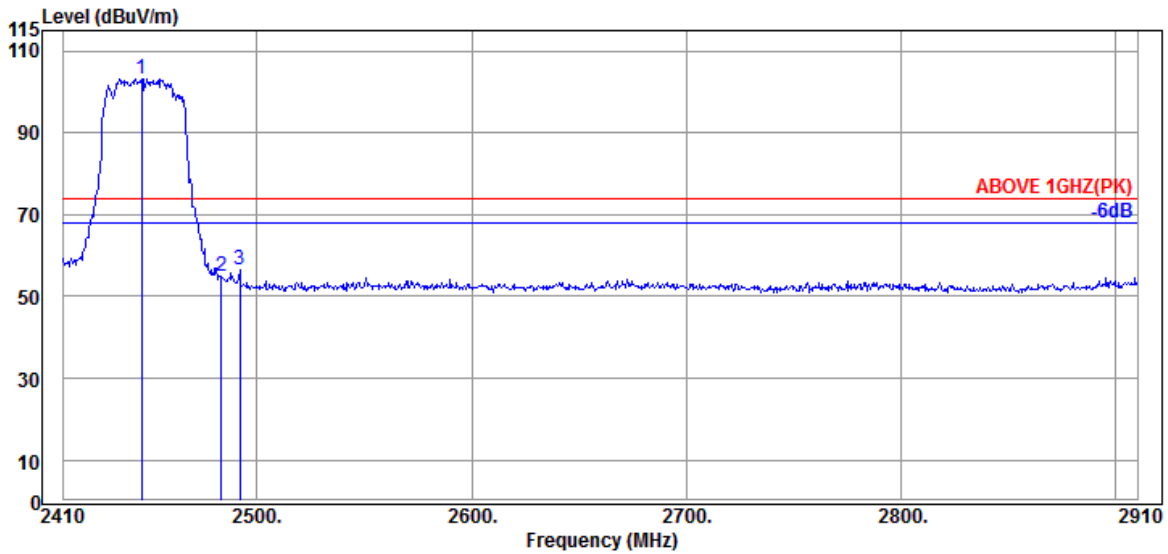

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2446.500	32.30	7.98	34.55	97.52	103.25	---	---	Peak
2483.500	32.30	7.99	34.55	49.00	54.74	74.00	19.26	Peak
2492.000	32.30	8.00	34.56	50.69	56.43	74.00	17.57	Peak

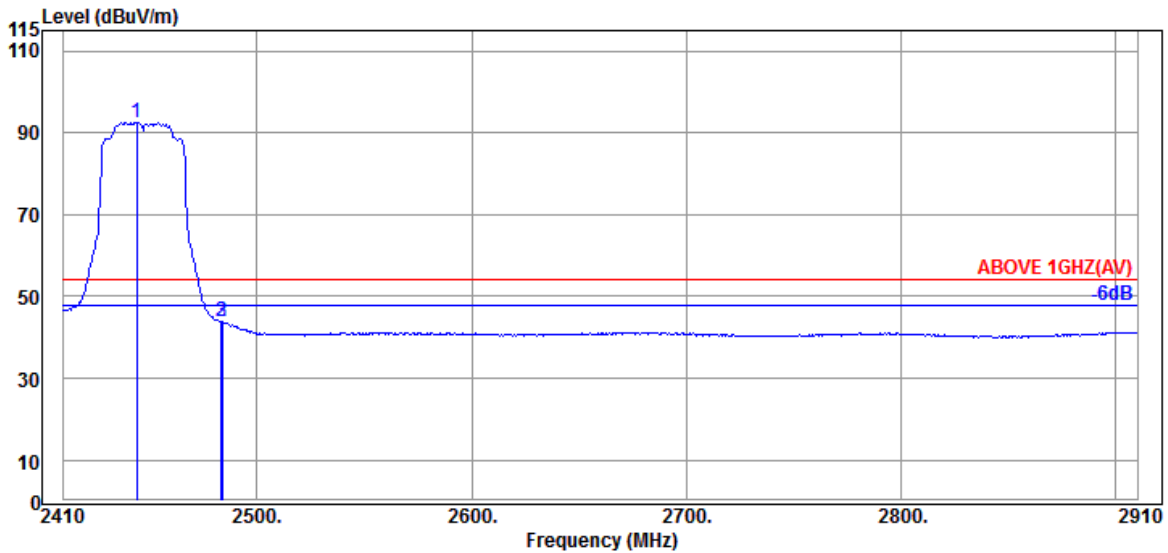


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2444.000	32.23	7.98	34.55	86.92	92.58	---	---	Average
2483.500	32.30	7.99	34.55	38.12	43.86	54.00	10.14	Average
2484.000	32.30	7.99	34.55	37.96	43.70	54.00	10.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

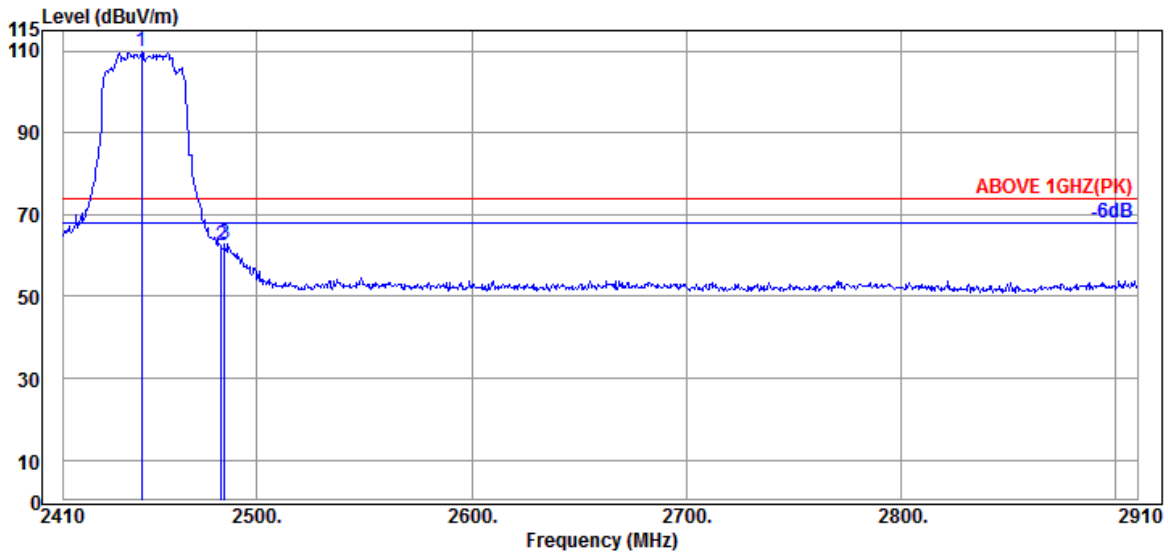

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2446.500	32.30	7.98	34.55	103.99	109.72	---	---	Peak
2483.500	32.30	7.99	34.55	56.80	62.54	74.00	11.46	Peak
2485.000	32.30	7.99	34.55	57.18	62.92	74.00	11.08	Peak

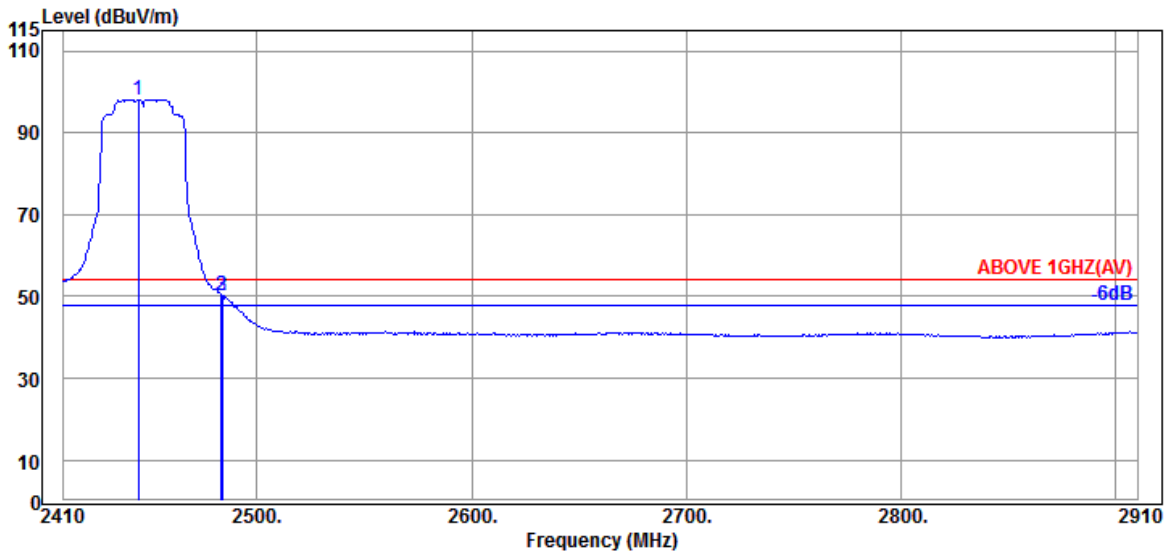


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.000	32.23	7.98	34.55	92.54	98.20	---	---	Average
2483.500	32.30	7.99	34.55	44.48	50.22	54.00	3.78	Average
2484.000	32.30	7.99	34.55	44.47	50.21	54.00	3.79	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

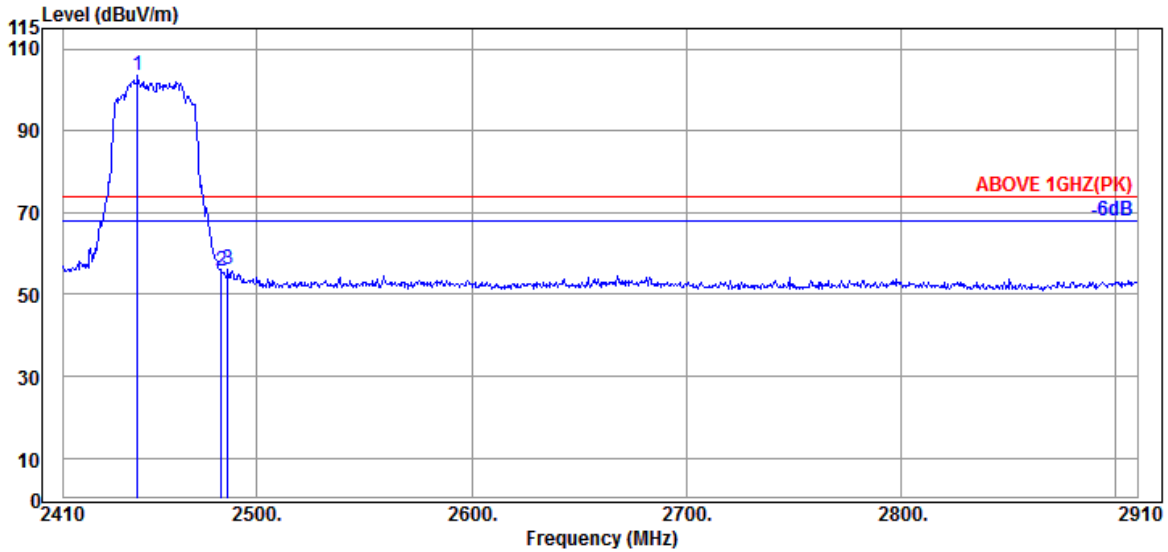

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.500	32.23	7.98	34.55	98.02	103.68	---	---	Peak
2483.500	32.30	7.99	34.55	50.17	55.91	74.00	18.09	Peak
2486.500	32.30	8.00	34.55	50.17	55.92	74.00	18.08	Peak

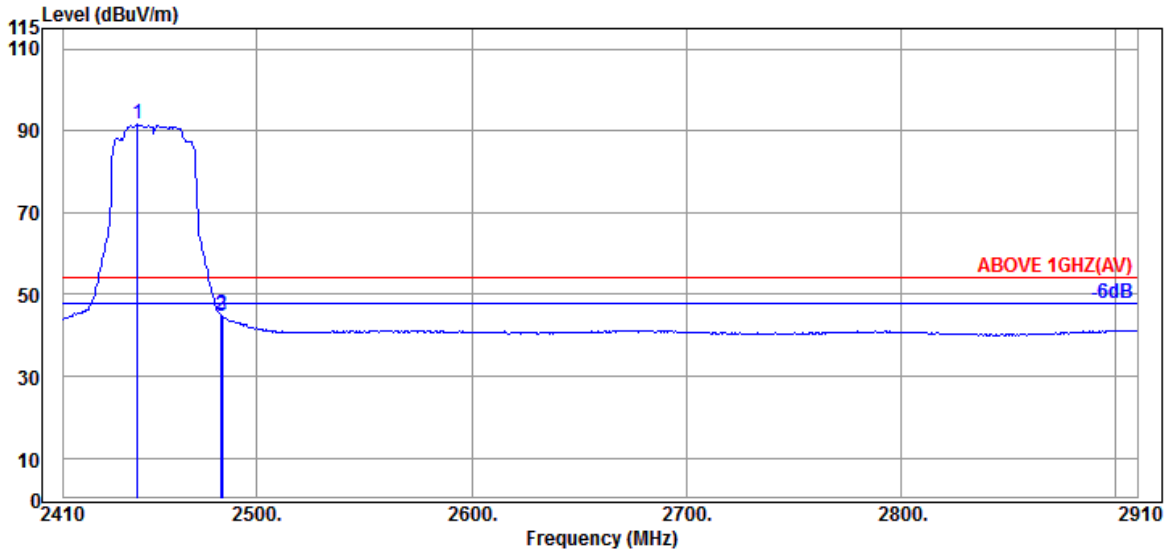


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.500	32.23	7.98	34.55	85.84	91.50	---	---	Average
2483.500	32.30	7.99	34.55	39.12	44.86	54.00	9.14	Average
2484.000	32.30	7.99	34.55	38.76	44.50	54.00	9.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

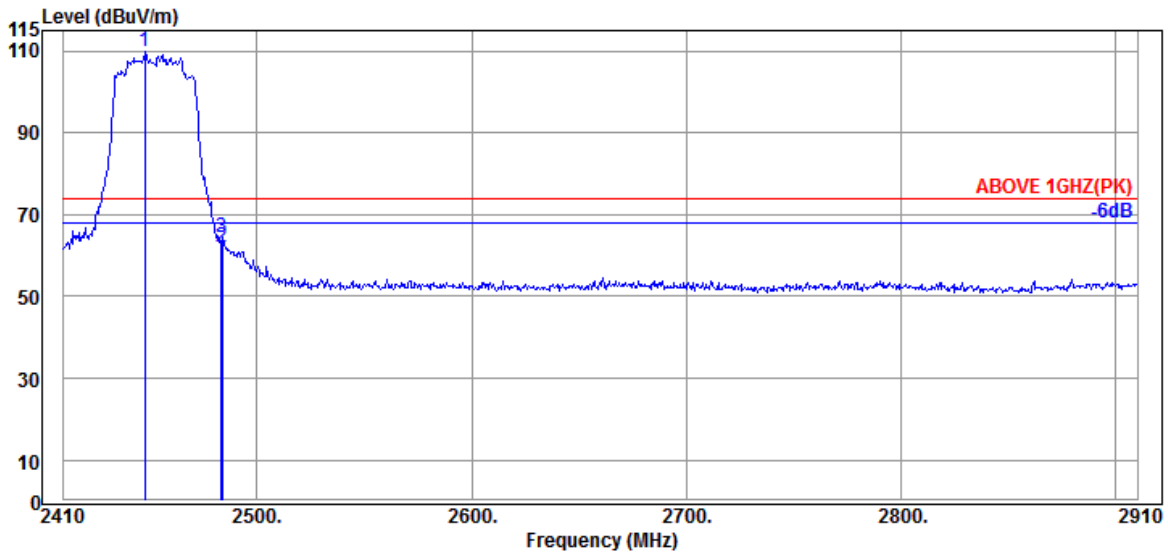

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.000	32.30	7.98	34.55	104.17	109.90	---	---	Peak
2483.500	32.30	7.99	34.55	56.15	61.89	74.00	12.11	Peak
2484.000	32.30	7.99	34.55	58.75	64.49	74.00	9.51	Peak

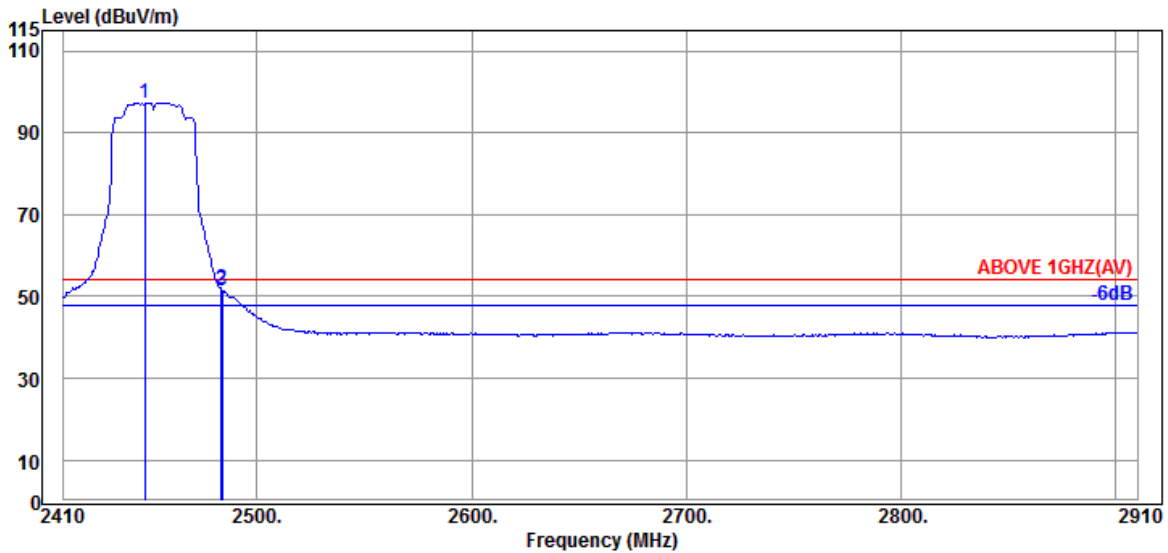


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.000	32.30	7.98	34.55	91.62	97.35	---	---	Average
2483.500	32.30	7.99	34.55	45.95	51.69	54.00	2.31	Average
2484.000	32.30	7.99	34.55	45.65	51.39	54.00	2.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

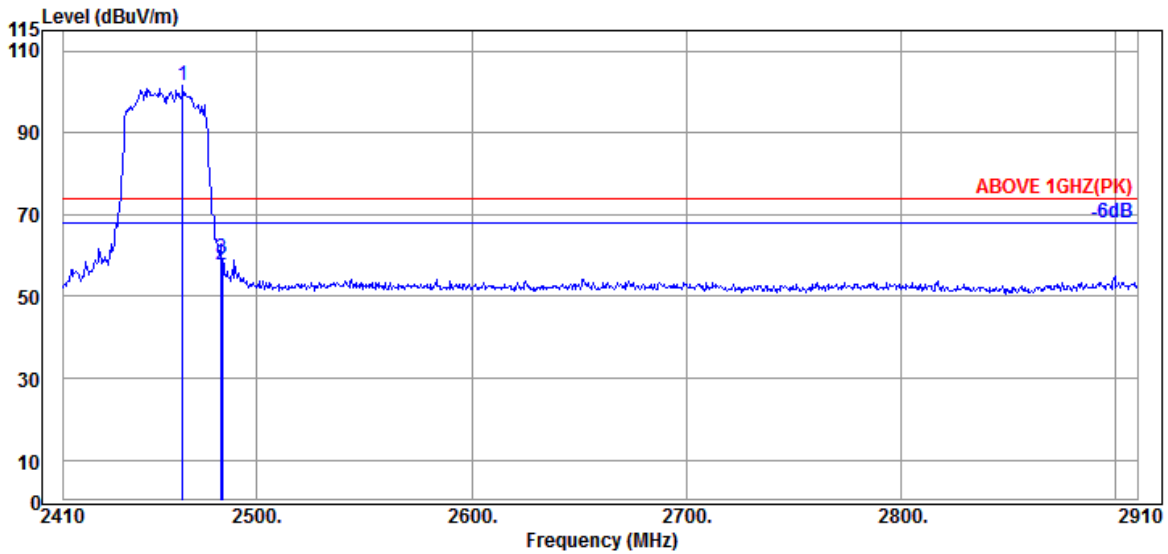

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	96.03	101.76	---	---	Peak
2483.500	32.30	7.99	34.55	51.95	57.69	74.00	16.31	Peak
2484.000	32.30	7.99	34.55	53.37	59.11	74.00	14.89	Peak

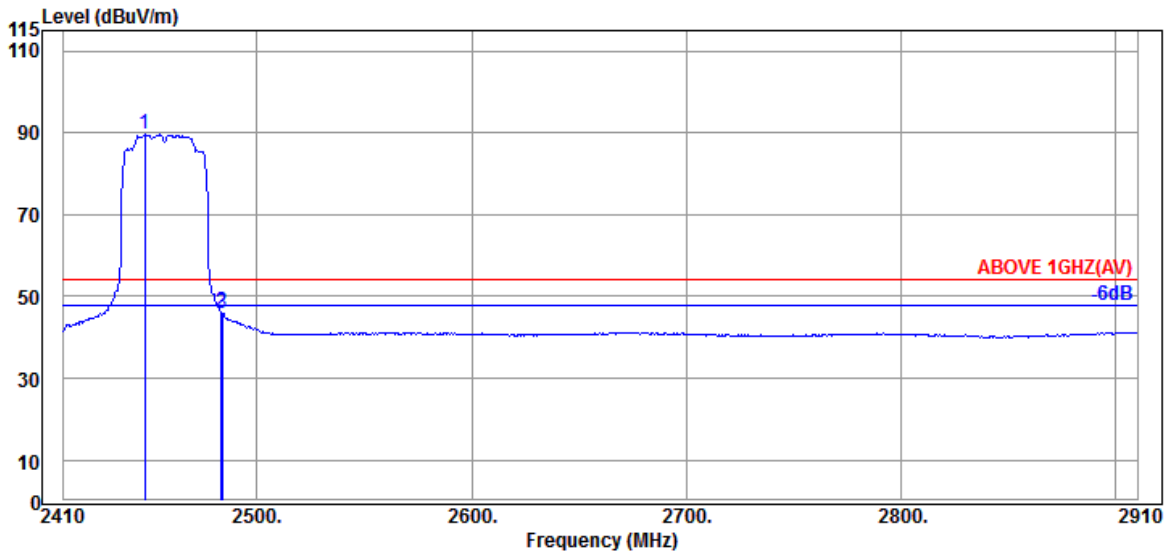


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.000	32.30	7.98	34.55	83.85	89.58	---	---	Average
2483.500	32.30	7.99	34.55	40.44	46.18	54.00	7.82	Average
2484.000	32.30	7.99	34.55	40.04	45.78	54.00	8.22	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

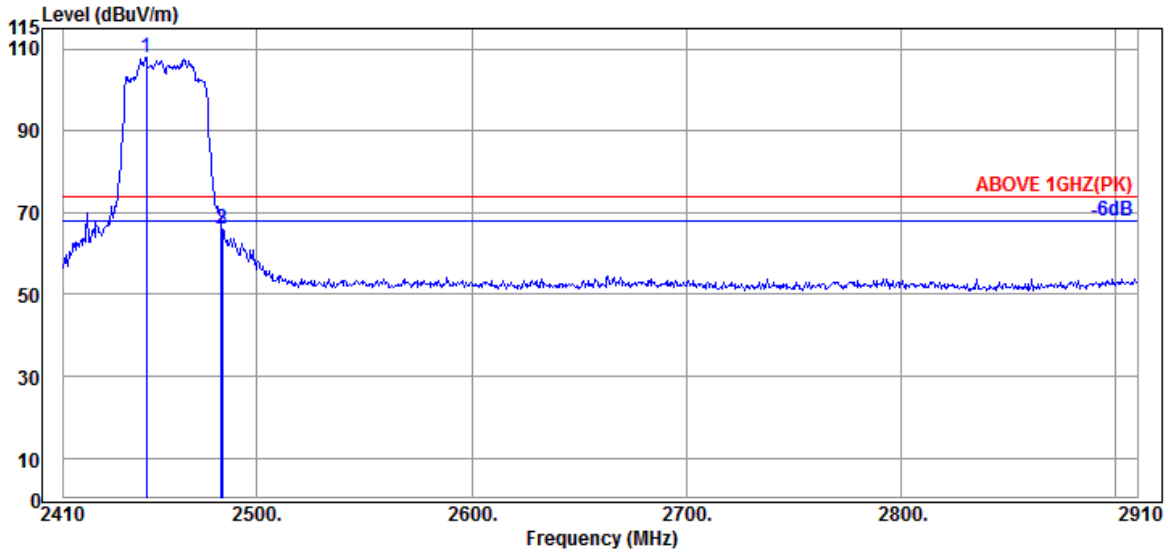

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.500	32.30	7.98	34.55	102.07	107.80	---	---	Peak
2483.500	32.30	7.99	34.55	60.35	66.09	74.00	7.91	Peak
2484.000	32.30	7.99	34.55	60.12	65.86	74.00	8.14	Peak

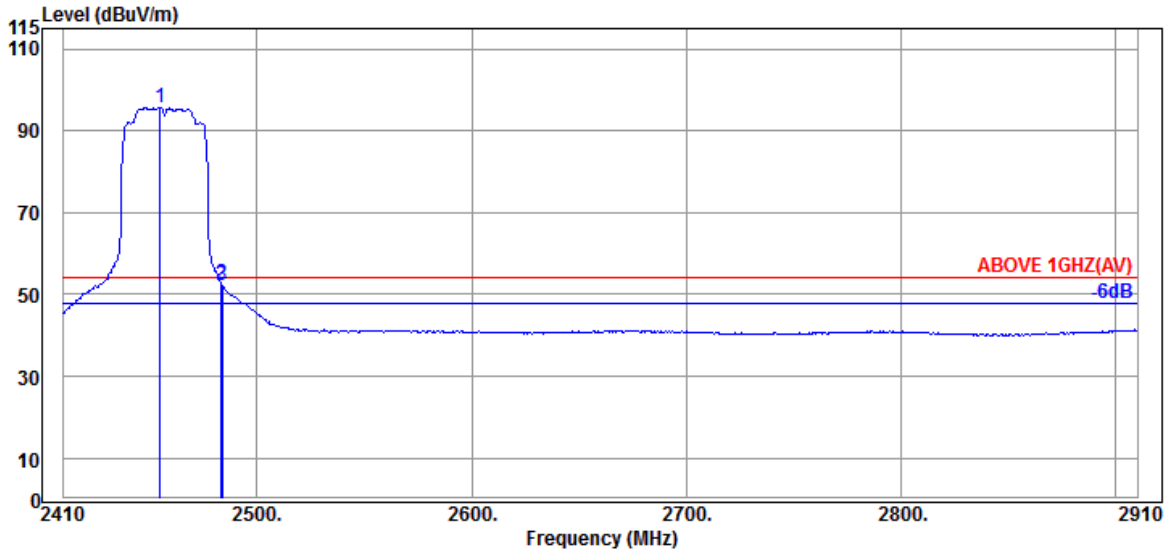


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.000	32.30	7.98	34.55	89.99	95.72	---	---	Average
2483.500	32.30	7.99	34.55	46.67	52.41	54.00	1.59	Average
2484.000	32.30	7.99	34.55	46.45	52.19	54.00	1.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

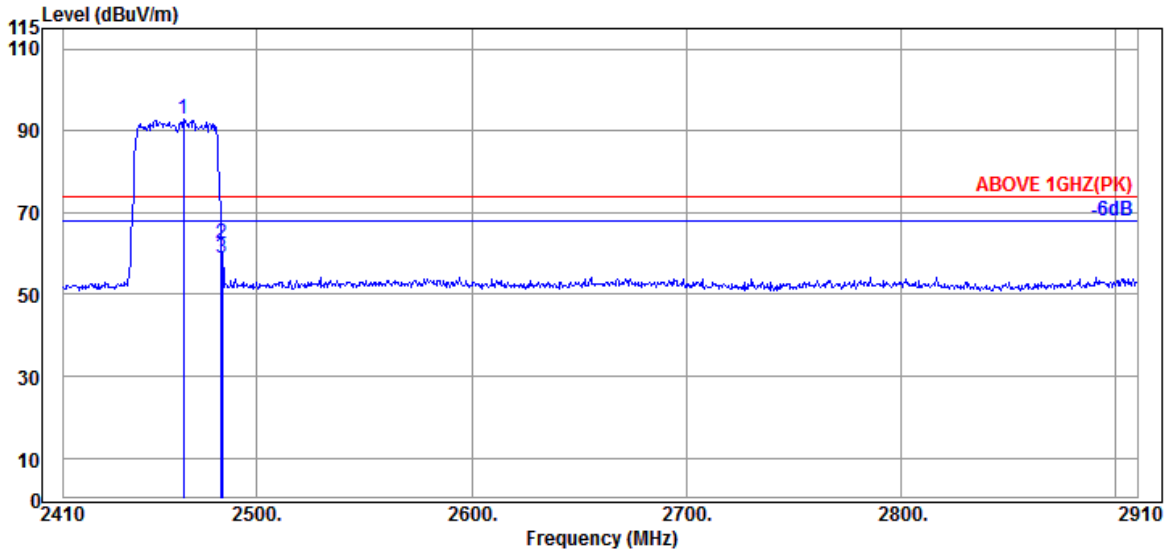

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	32.30	7.98	34.55	87.30	93.03	---	---	Peak
2483.500	32.30	7.99	34.55	56.77	62.51	74.00	11.49	Peak
2484.000	32.30	7.99	34.55	53.24	58.98	74.00	15.02	Peak

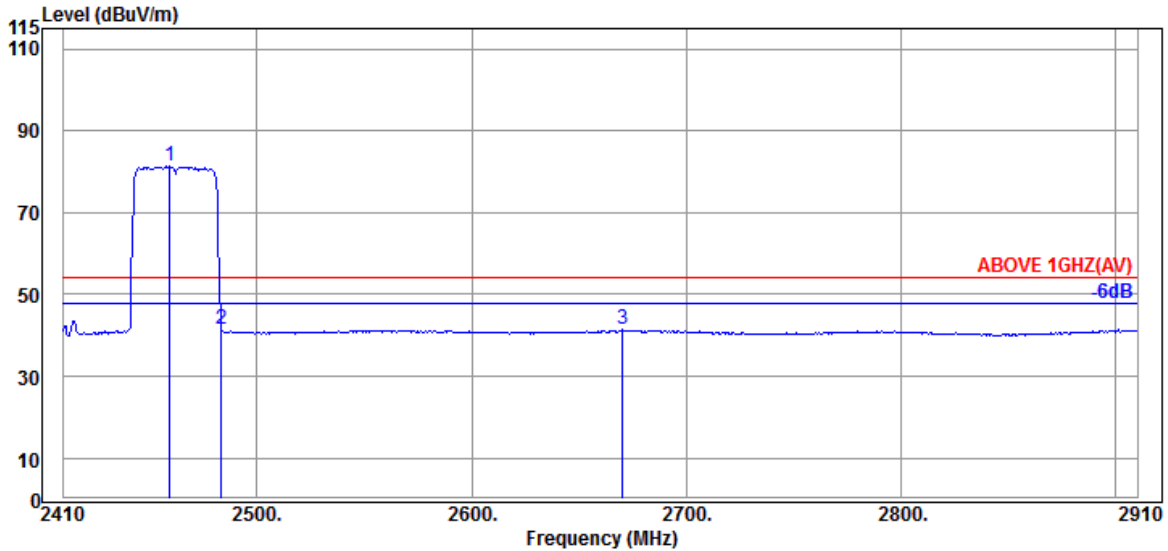


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.500	32.30	7.98	34.55	75.63	81.36	---	---	Average
2483.500	32.30	7.99	34.55	35.66	41.40	54.00	12.60	Average
2670.500	32.20	8.08	34.60	35.64	41.32	54.00	12.68	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

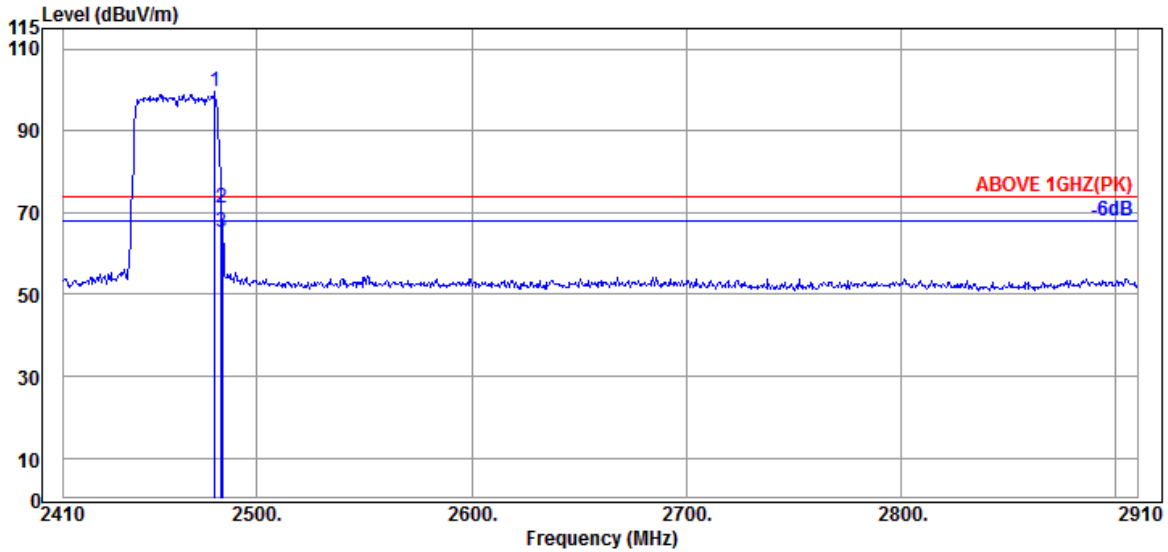

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.30	7.99	34.55	93.69	99.43	---	---	Peak
2483.500	32.30	7.99	34.55	65.54	71.28	74.00	2.72	Peak
2484.000	32.30	7.99	34.55	59.30	65.04	74.00	8.96	Peak

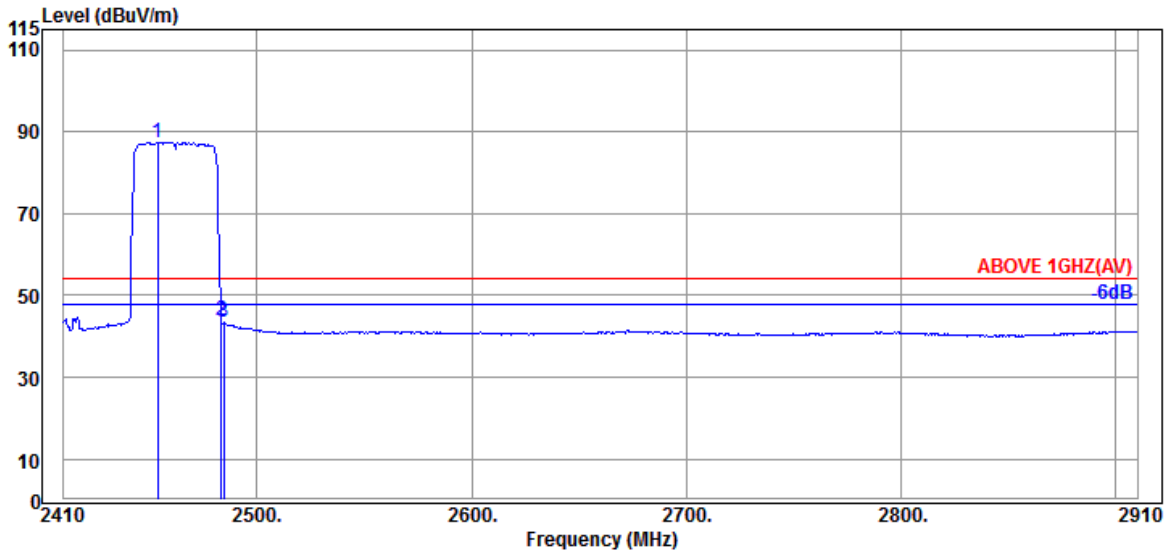


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	32.30	7.98	34.55	81.69	87.42	---	---	Average
2483.500	32.30	7.99	34.55	38.01	43.75	54.00	10.25	Average
2484.500	32.30	7.99	34.55	37.60	43.34	54.00	10.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

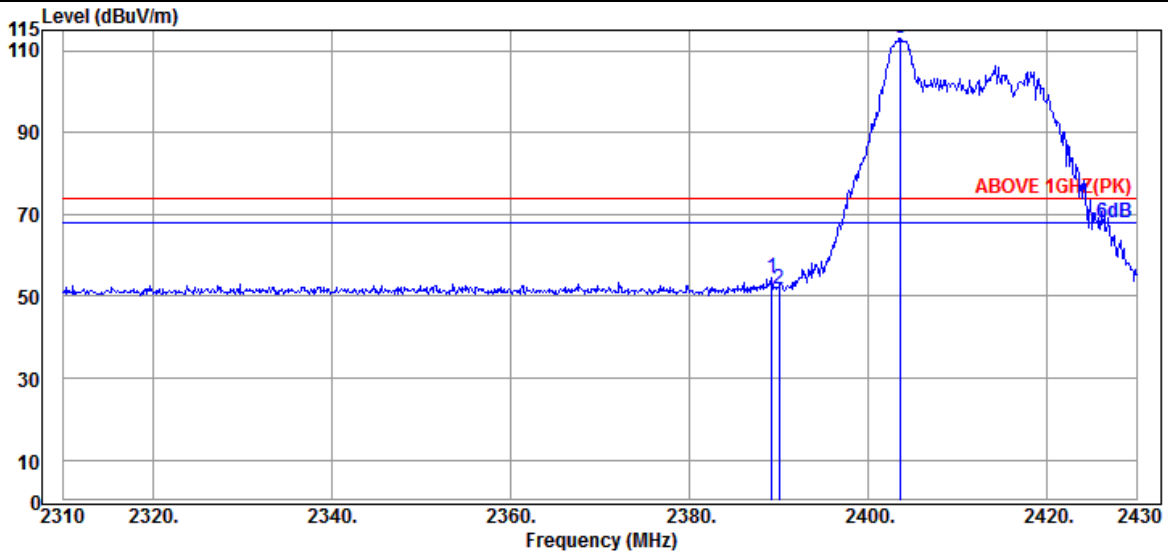

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	49.12	54.43	74.00	19.57	Peak
2390.040	31.89	7.95	34.54	46.42	51.72	74.00	22.28	Peak
@ 2403.600	31.80	7.95	34.54	107.83	113.04	---	---	Peak

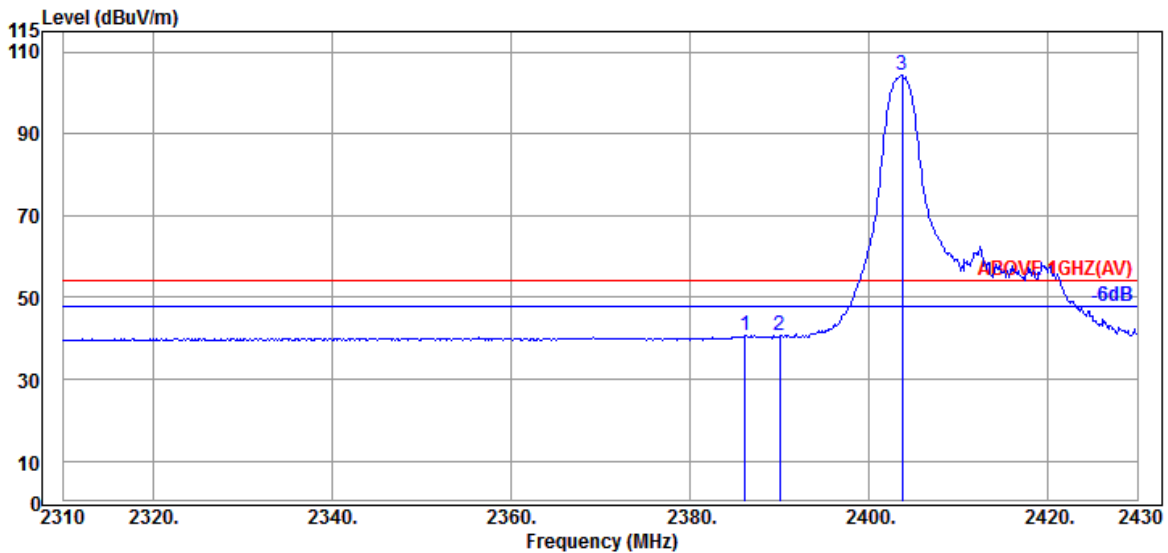


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	31.89	7.95	34.53	35.43	40.74	54.00	13.26	Average
2390.040	31.89	7.95	34.54	35.31	40.61	54.00	13.39	Average
@ 2403.720	31.80	7.95	34.54	99.04	104.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

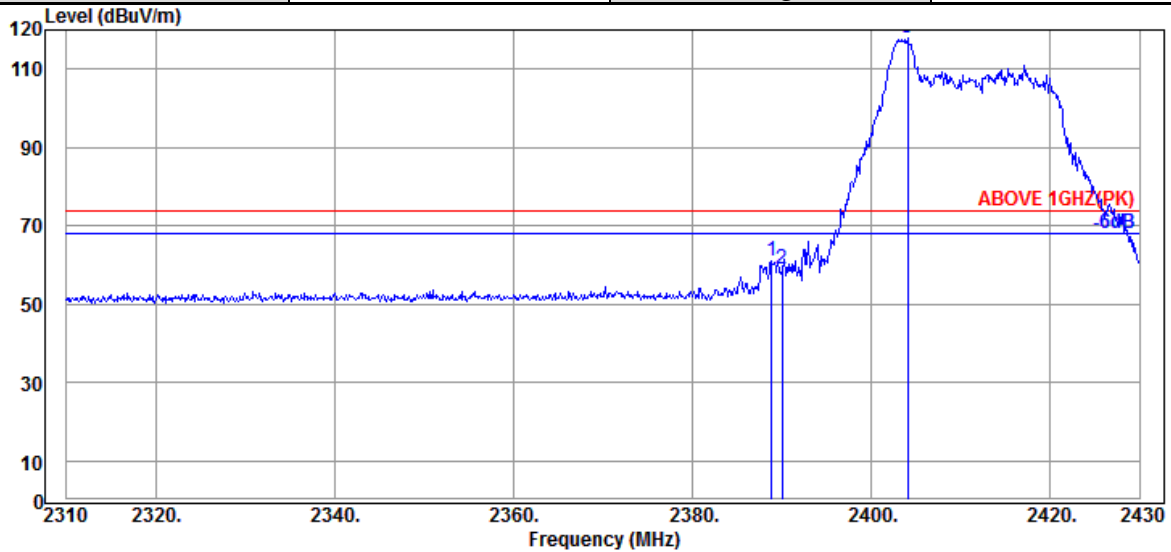

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	31.89	7.95	34.53	55.59	60.90	74.00	13.10	Peak
2390.040	31.89	7.95	34.54	53.82	59.12	74.00	14.88	Peak
@ 2404.080	31.80	7.95	34.54	112.73	117.94	---	---	Peak

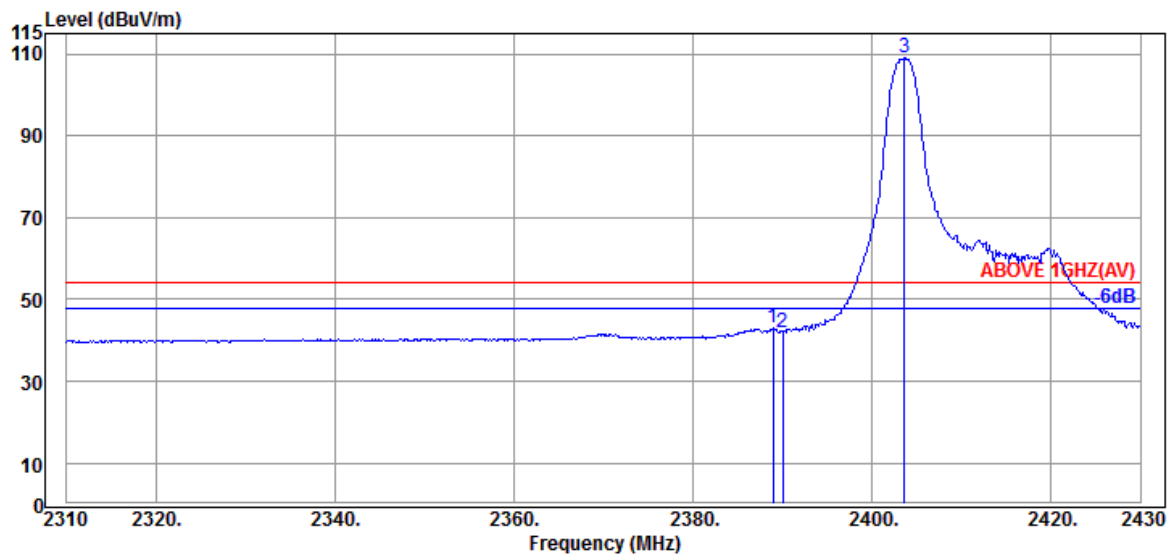


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	31.89	7.95	34.53	37.75	43.06	54.00	10.94	Average
2390.040	31.89	7.95	34.54	36.67	41.97	54.00	12.03	Average
@ 2403.600	31.80	7.95	34.54	103.69	108.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

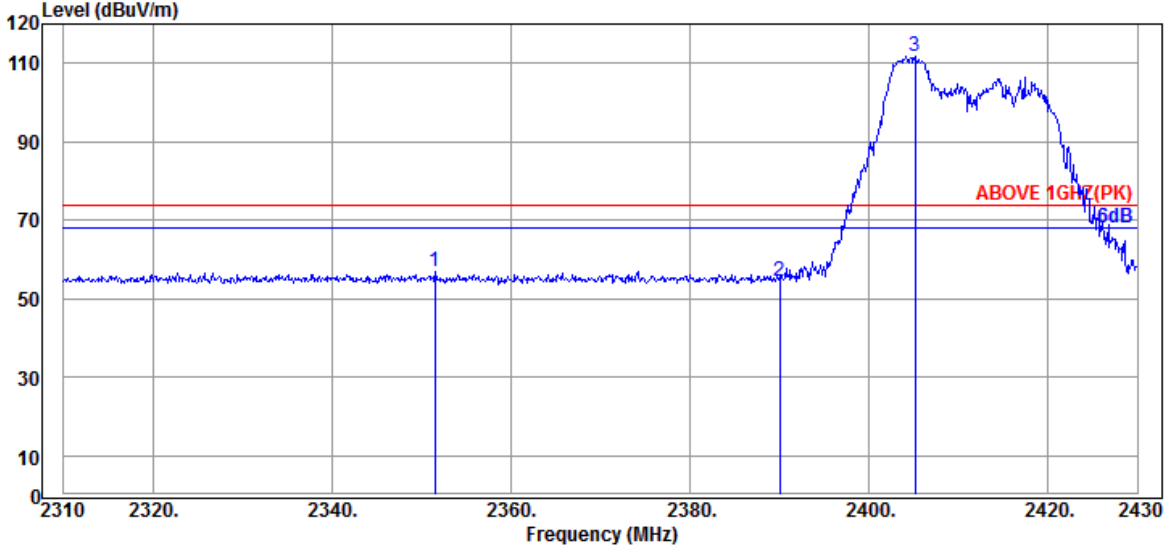

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2351.520	32.10	7.93	34.53	51.55	57.05	74.00	16.95	Peak
2390.040	31.89	7.95	34.54	49.16	54.46	74.00	19.54	Peak
@ 2405.160	31.87	7.95	34.54	106.53	111.81	---	---	Peak

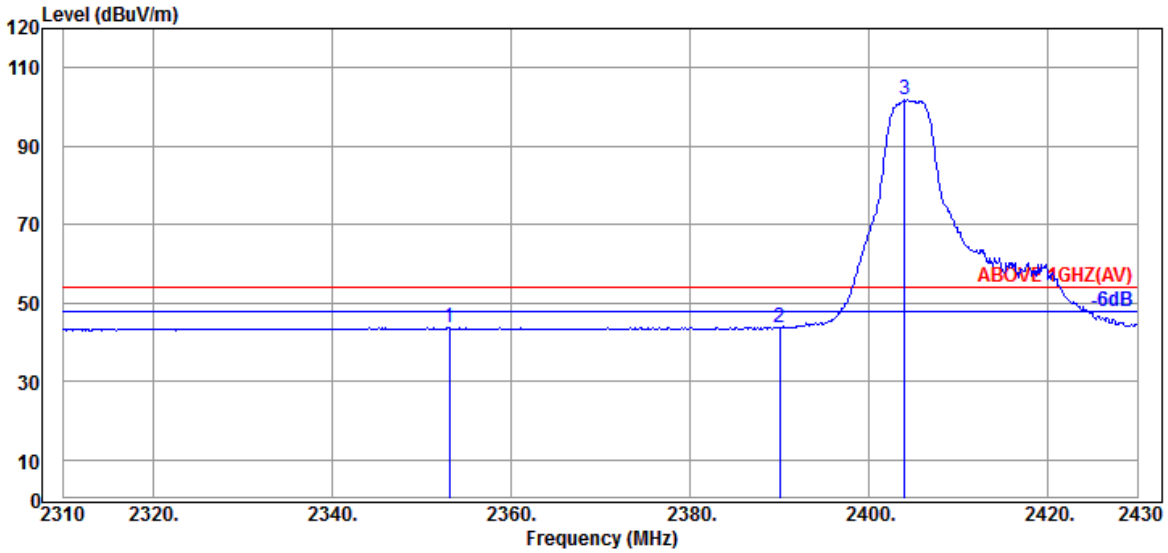


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2353.080	32.10	7.93	34.53	38.22	43.72	54.00	10.28	Average
2390.040	31.89	7.95	34.54	38.38	43.68	54.00	10.32	Average
@ 2403.960	31.80	7.95	34.54	96.45	101.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

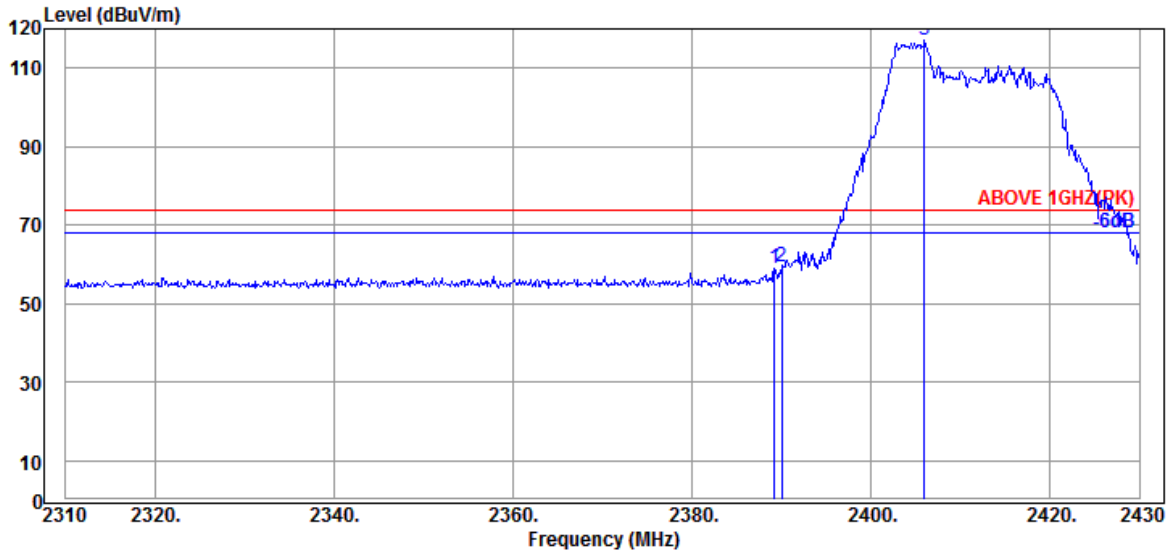

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	31.89	7.95	34.53	53.64	58.95	74.00	15.05	Peak
2390.040	31.89	7.95	34.54	53.92	59.22	74.00	14.78	Peak
@ 2406.000	31.87	7.95	34.54	111.72	117.00	---	---	Peak

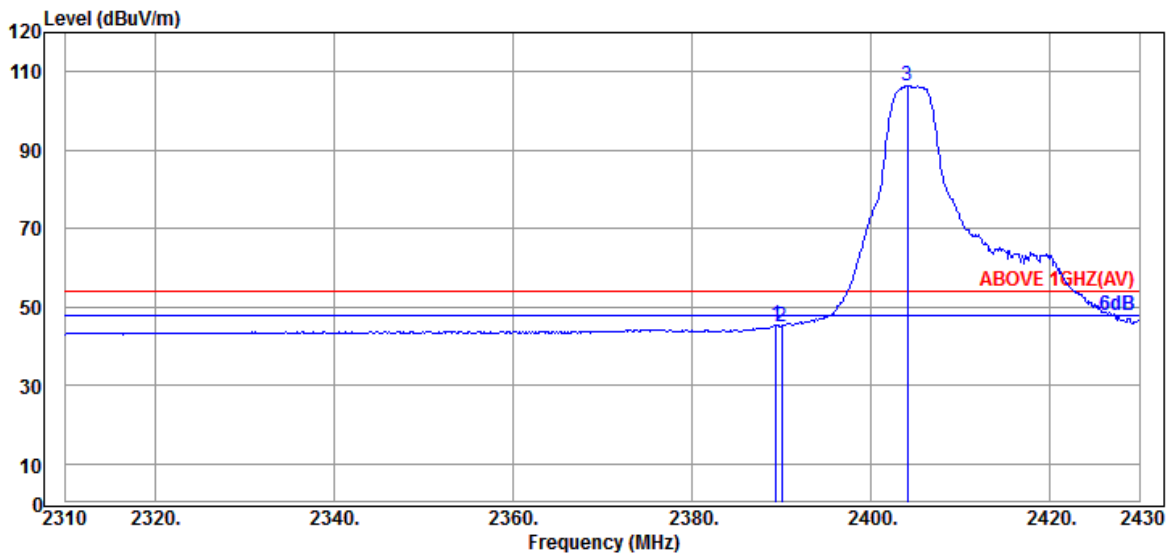


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	31.89	7.95	34.53	40.03	45.34	54.00	8.66	Average
2390.040	31.89	7.95	34.54	39.75	45.05	54.00	8.95	Average
@ 2404.080	31.80	7.95	34.54	101.15	106.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

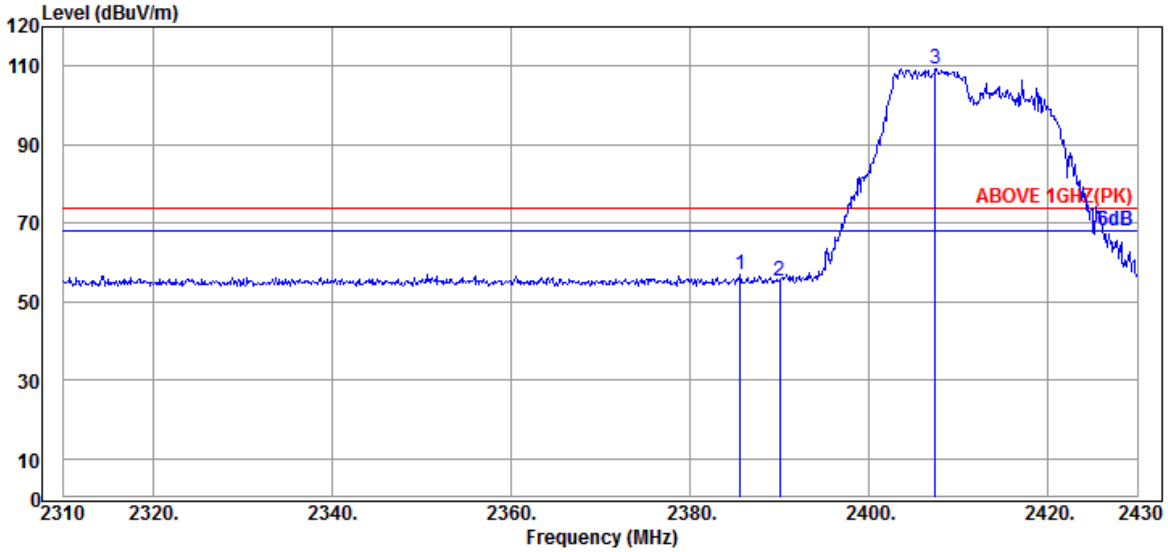

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.600	31.89	7.95	34.53	51.60	56.91	74.00	17.09	Peak
2390.040	31.89	7.95	34.54	49.91	55.21	74.00	18.79	Peak
@ 2407.440	31.87	7.96	34.54	104.12	109.41	---	---	Peak

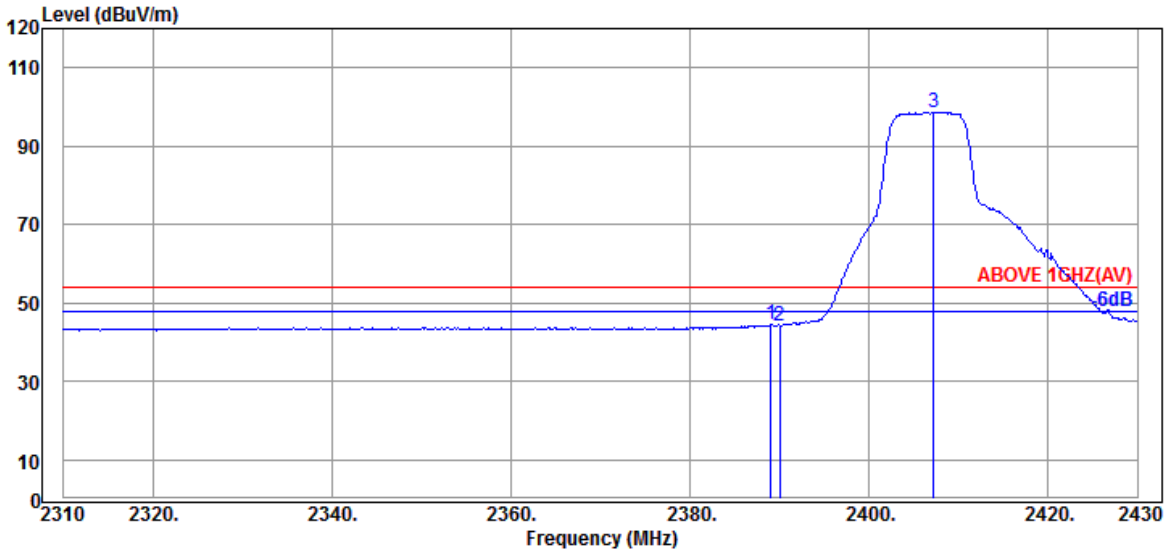


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	31.89	7.95	34.53	39.25	44.56	54.00	9.44	Average
2390.040	31.89	7.95	34.54	38.93	44.23	54.00	9.77	Average
@ 2407.200	31.87	7.95	34.54	93.40	98.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

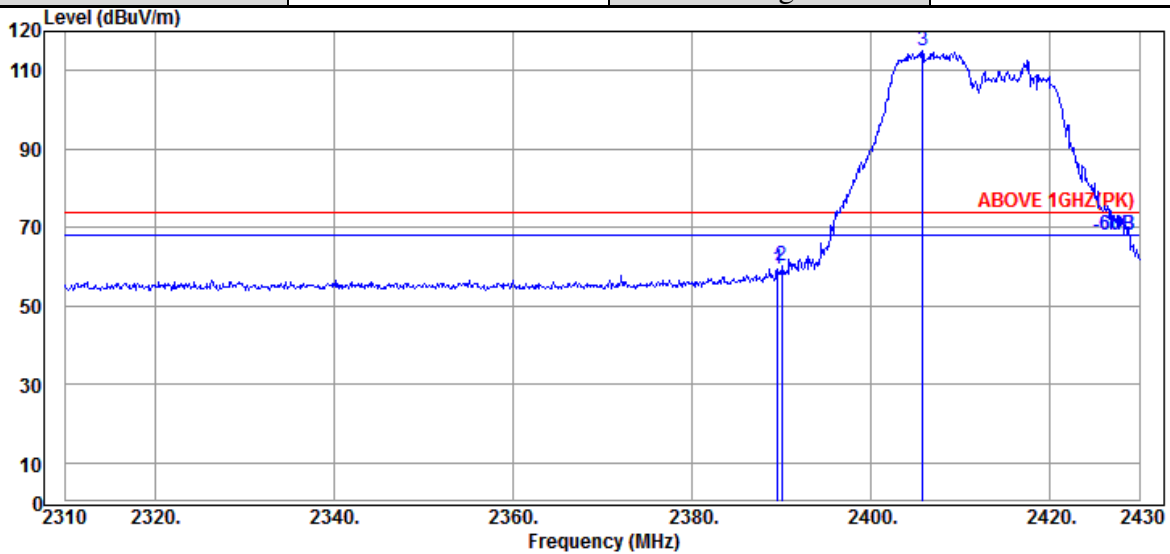

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	31.89	7.95	34.53	54.09	59.40	74.00	14.60	Peak
2390.040	31.89	7.95	34.54	54.95	60.25	74.00	13.75	Peak
@ 2405.760	31.87	7.95	34.54	109.62	114.90	---	---	Peak

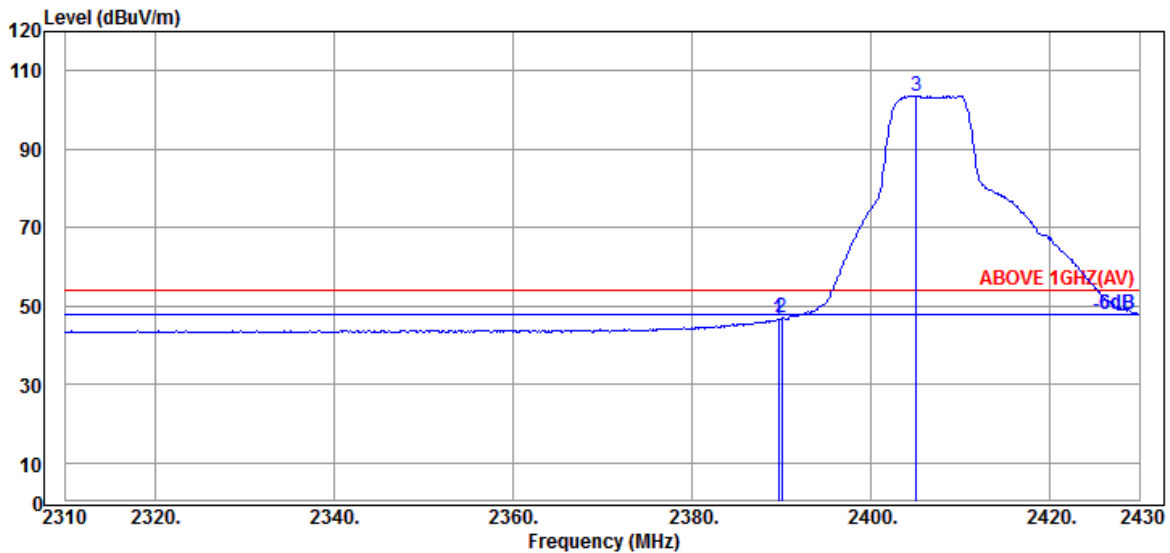


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	31.89	7.95	34.53	41.14	46.45	54.00	7.55	Average
2390.040	31.89	7.95	34.54	41.61	46.91	54.00	7.09	Average
@ 2405.040	31.87	7.95	34.54	98.32	103.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

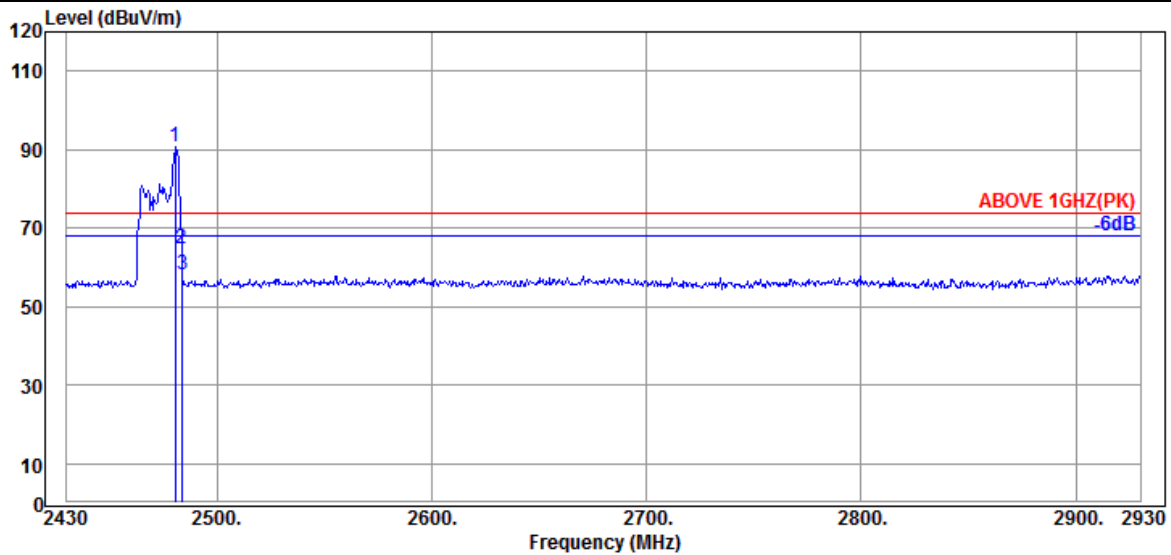

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	32.30	7.99	34.55	84.82	90.56	---	---	Peak
	2483.500	32.30	7.99	34.55	58.84	64.58	74.00	9.42	Peak
	2484.000	32.30	7.99	34.55	52.52	58.26	74.00	15.74	Peak

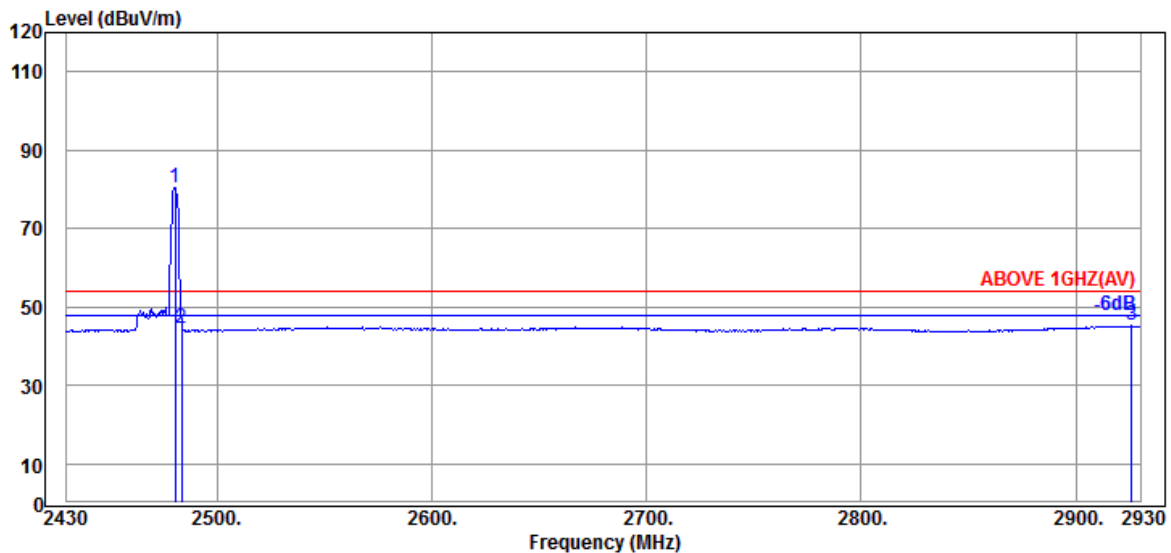


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	32.30	7.99	34.55	74.74	80.48	---	---	Average
	2483.500	32.30	7.99	34.55	38.89	44.63	54.00	9.37	Average
	2926.000	32.90	8.19	34.65	38.73	45.17	54.00	8.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

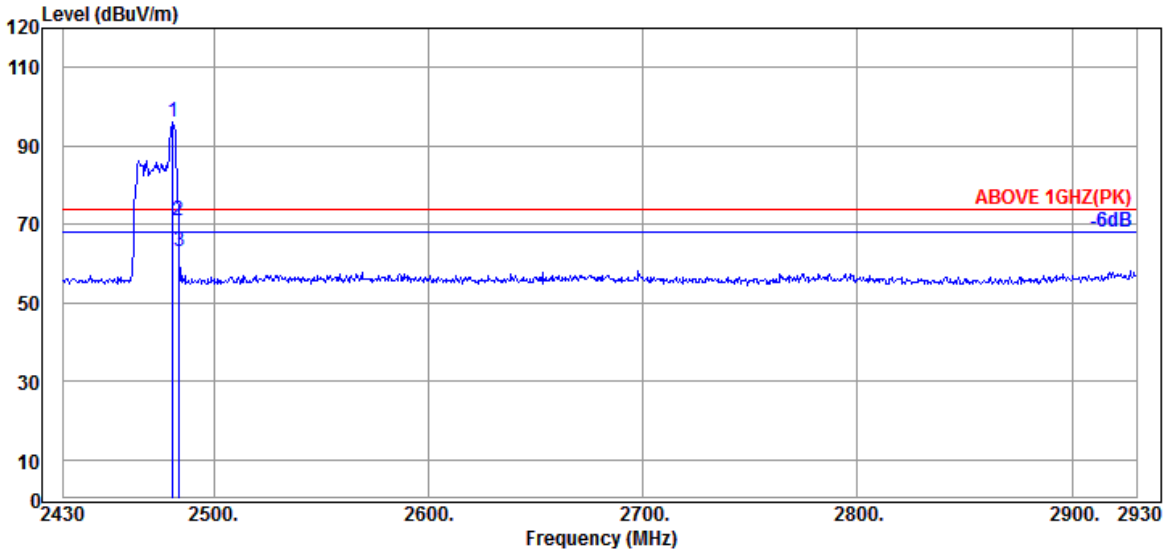

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.000	32.30	7.99	34.55	90.49	96.23	---	---	Peak
2483.500	32.30	7.99	34.55	64.99	70.73	74.00	3.27	Peak
2484.000	32.30	7.99	34.55	57.49	63.23	74.00	10.77	Peak

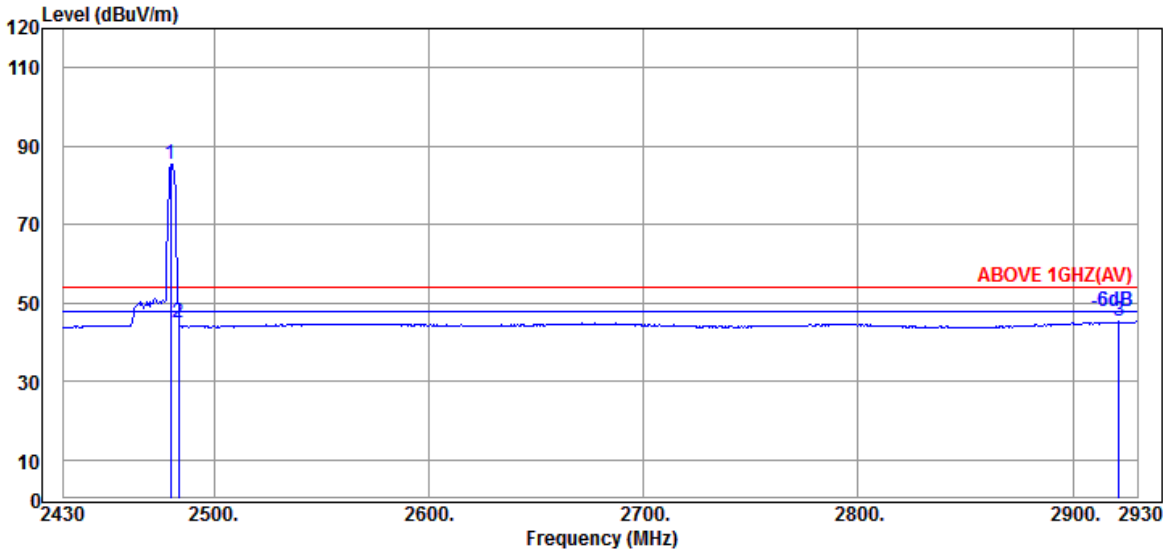


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	79.65	85.39	---	---	Average
2483.500	32.30	7.99	34.55	39.30	45.04	54.00	8.96	Average
2921.500	32.90	8.19	34.64	38.86	45.31	54.00	8.69	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

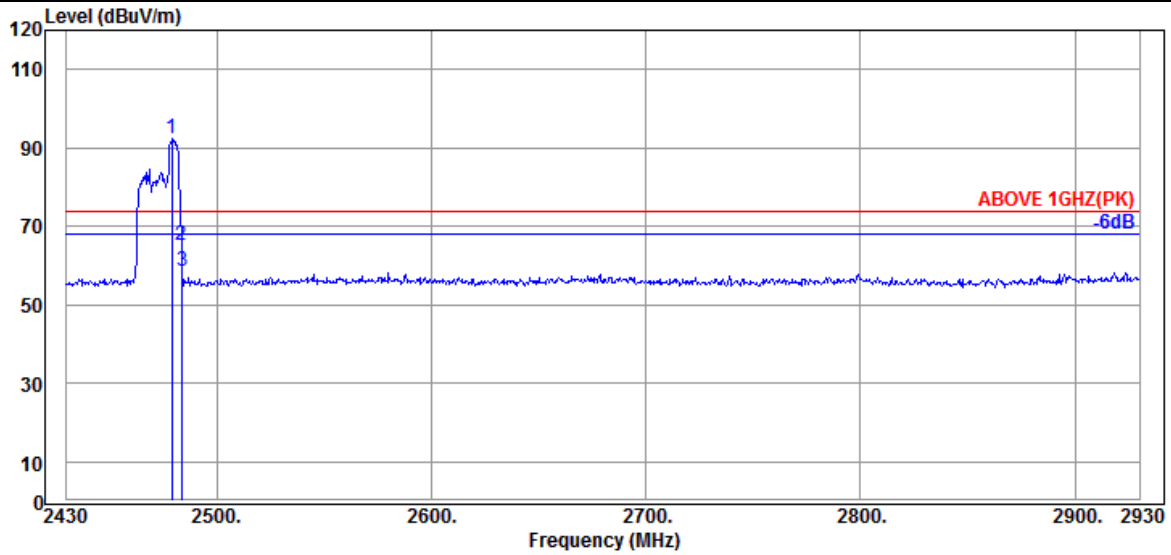

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	86.57	92.31	---	---	Peak
2483.500	32.30	7.99	34.55	59.39	65.13	74.00	8.87	Peak
2484.000	32.30	7.99	34.55	52.90	58.64	74.00	15.36	Peak

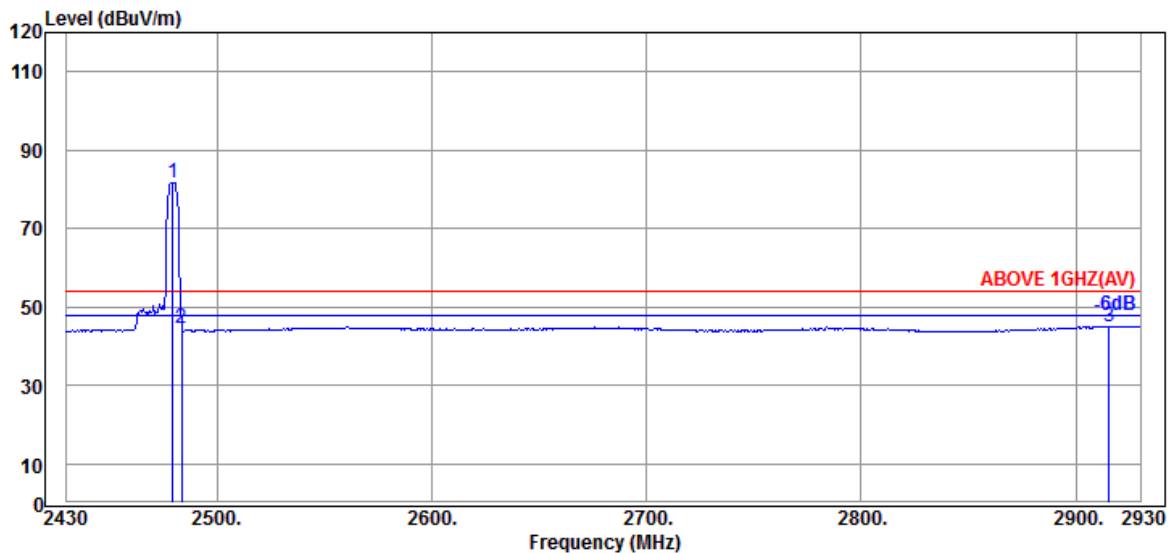


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	32.30	7.99	34.55	76.09	81.83	---	---	Average
2483.500	32.30	7.99	34.55	38.73	44.47	54.00	9.53	Average
2915.500	32.83	8.18	34.64	38.77	45.14	54.00	8.86	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

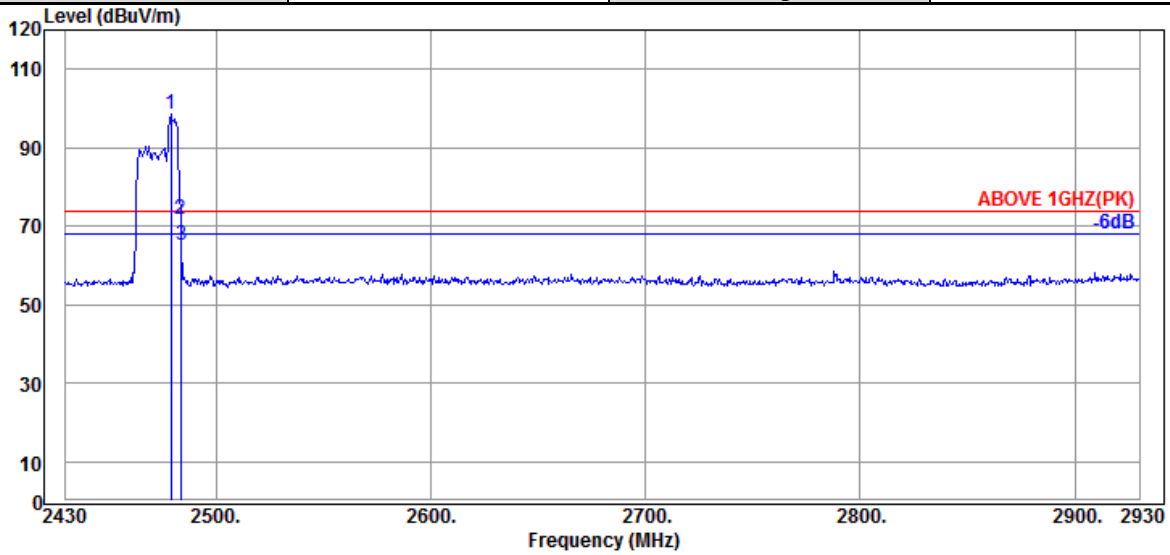

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	92.68	98.42	---	---	Peak
2483.500	32.30	7.99	34.55	66.19	71.93	74.00	2.07	Peak
2484.000	32.30	7.99	34.55	59.57	65.31	74.00	8.69	Peak

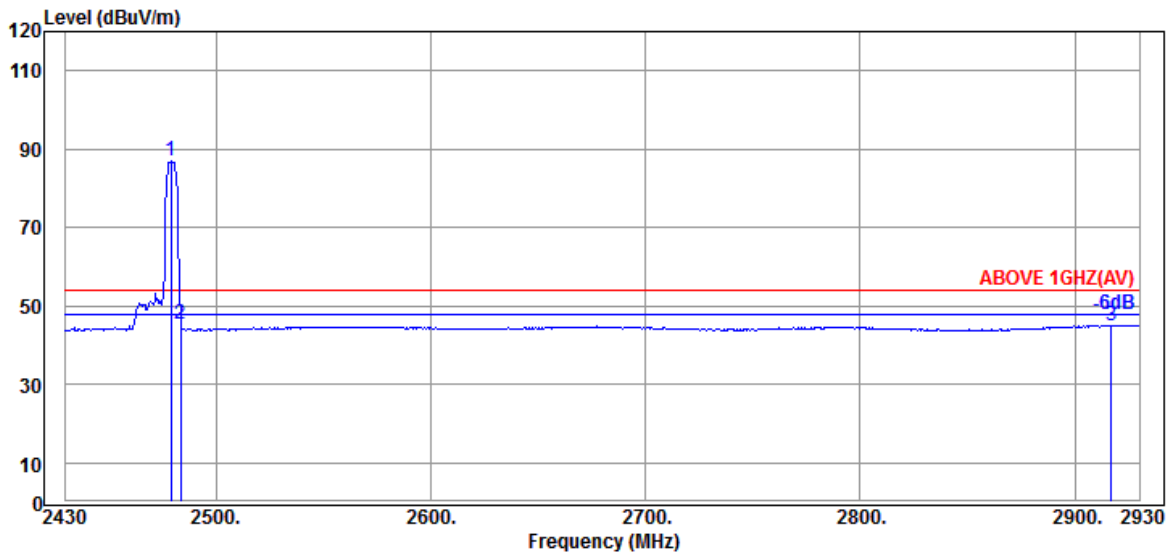


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	81.11	86.85	---	---	Average
2483.500	32.30	7.99	34.55	39.69	45.43	54.00	8.57	Average
2917.000	32.83	8.19	34.64	38.75	45.13	54.00	8.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

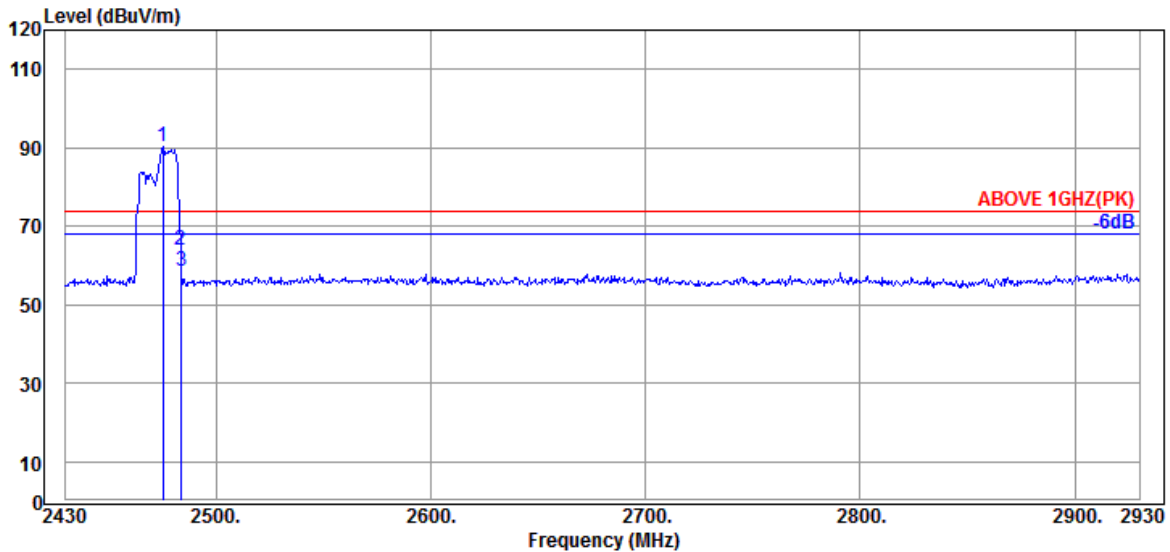

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.500	32.30	7.99	34.55	84.44	90.18	---	---	Peak
2483.500	32.30	7.99	34.55	58.34	64.08	74.00	9.92	Peak
2484.000	32.30	7.99	34.55	52.97	58.71	74.00	15.29	Peak

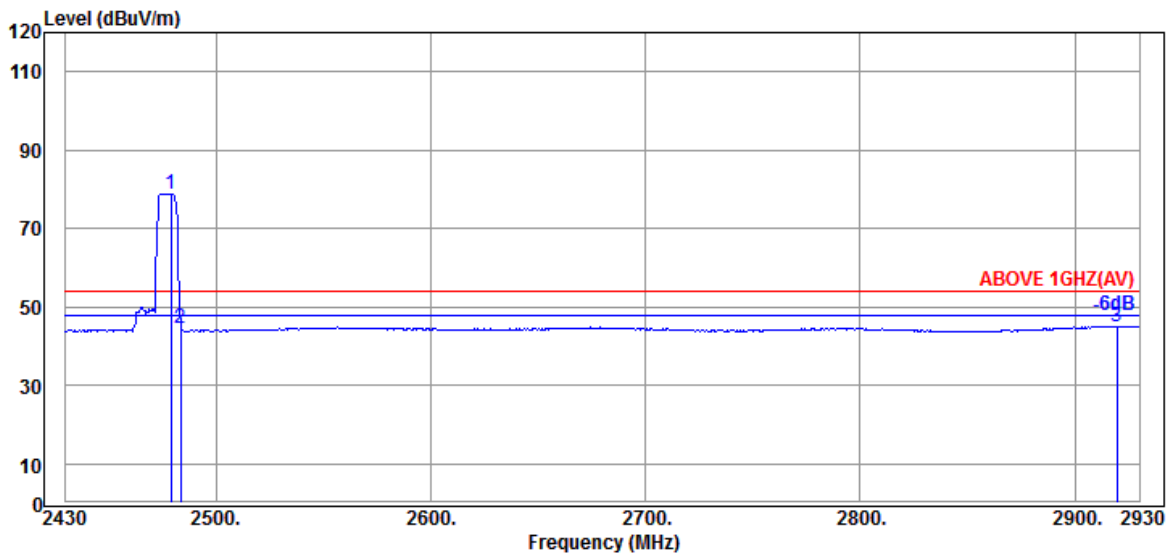


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.30	7.99	34.55	73.17	78.91	---	---	Average
2483.500	32.30	7.99	34.55	38.67	44.41	54.00	9.59	Average
2919.500	32.90	8.19	34.64	38.66	45.11	54.00	8.89	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

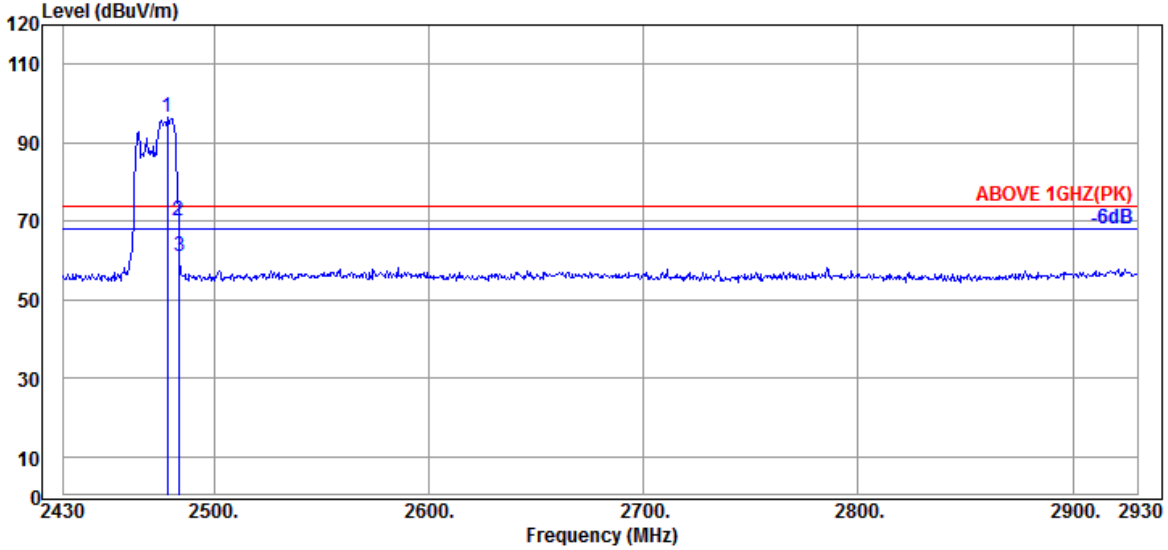

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	32.30	7.99	34.55	90.94	96.68	---	---	Peak
2483.500	32.30	7.99	34.55	64.45	70.19	74.00	3.81	Peak
2484.000	32.30	7.99	34.55	55.11	60.85	74.00	13.15	Peak

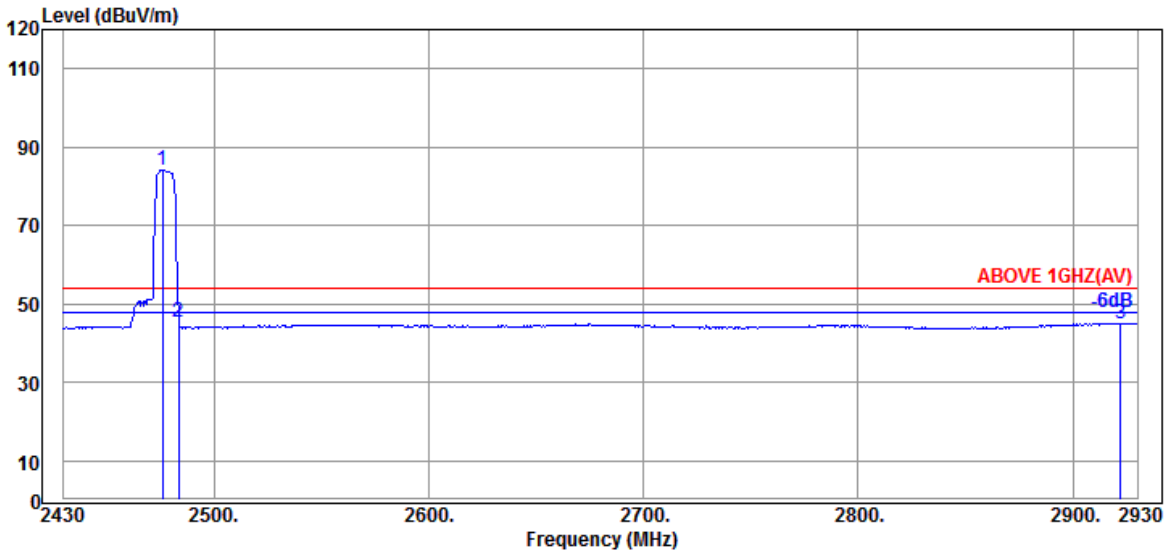


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	32.30	7.99	34.55	78.31	84.05	---	---	Average
2483.500	32.30	7.99	34.55	39.51	45.25	54.00	8.75	Average
2922.000	32.90	8.19	34.64	38.70	45.15	54.00	8.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

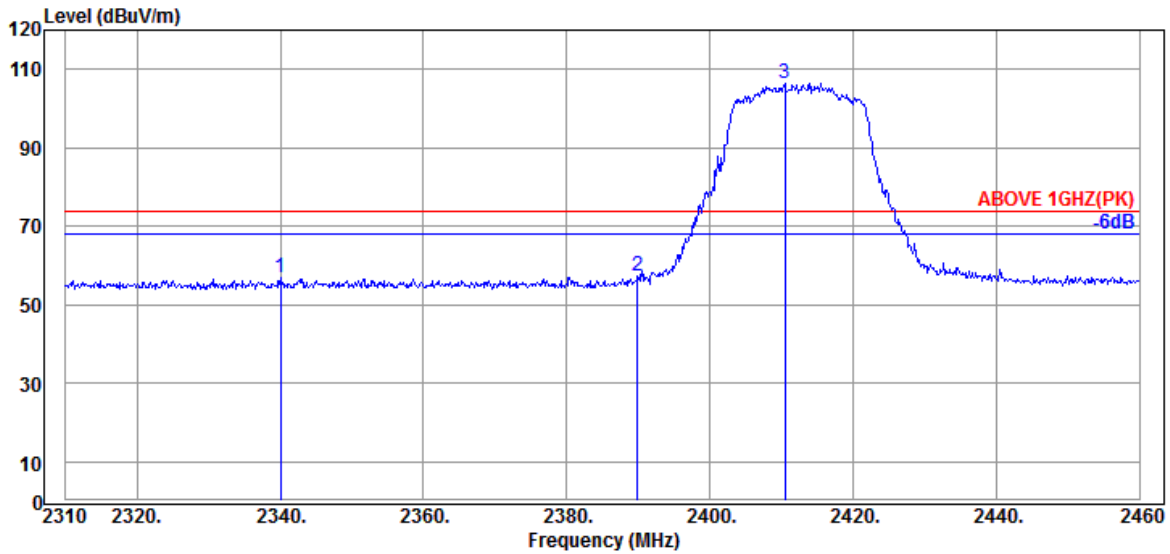

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2340.000	32.05	7.92	34.53	51.63	57.07	74.00	16.93	Peak
2389.950	31.89	7.95	34.54	52.02	57.32	74.00	16.68	Peak
@ 2410.500	31.87	7.96	34.54	101.16	106.45	---	---	Peak

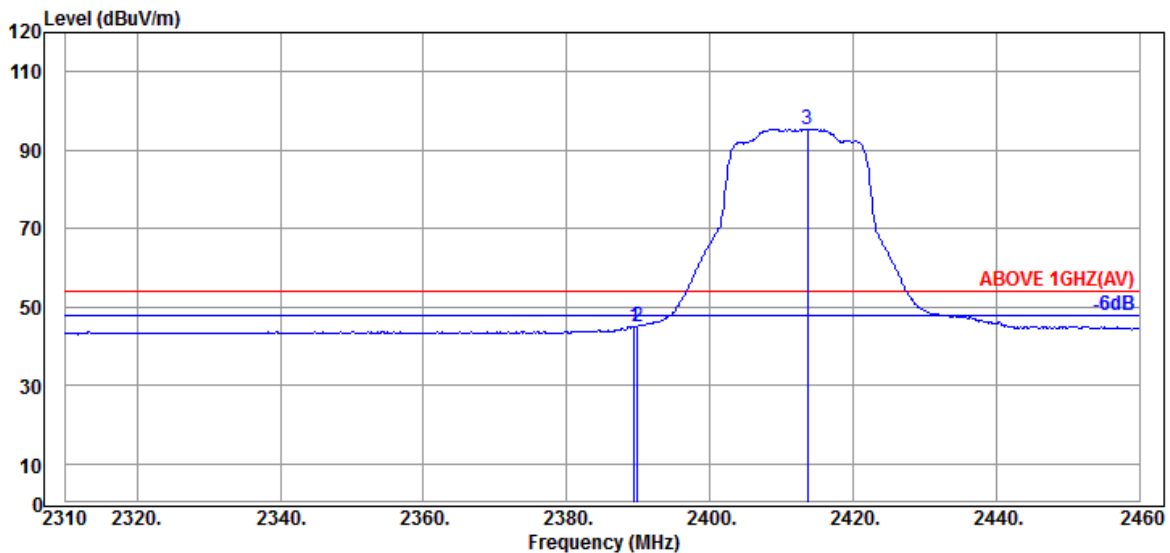


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	31.89	7.95	34.53	39.72	45.03	54.00	8.97	Average
2389.950	31.89	7.95	34.54	39.63	44.93	54.00	9.07	Average
@ 2413.650	31.94	7.96	34.54	90.08	95.44	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

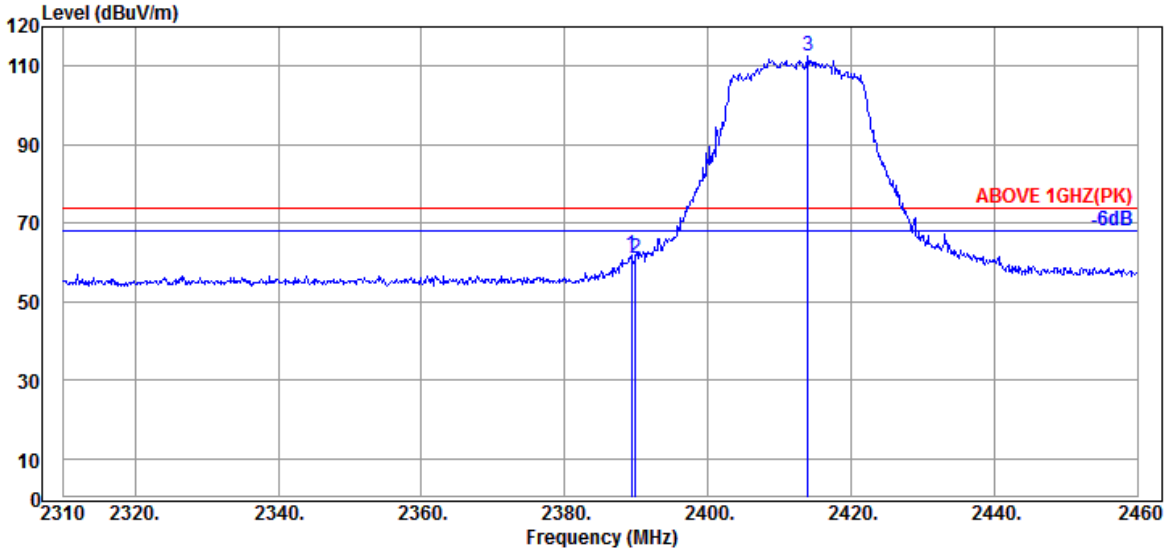

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.350	31.89	7.95	34.53	56.34	61.65	74.00	12.35	Peak
2389.950	31.89	7.95	34.54	55.68	60.98	74.00	13.02	Peak
@ 2413.950	31.94	7.96	34.54	107.21	112.57	---	---	Peak

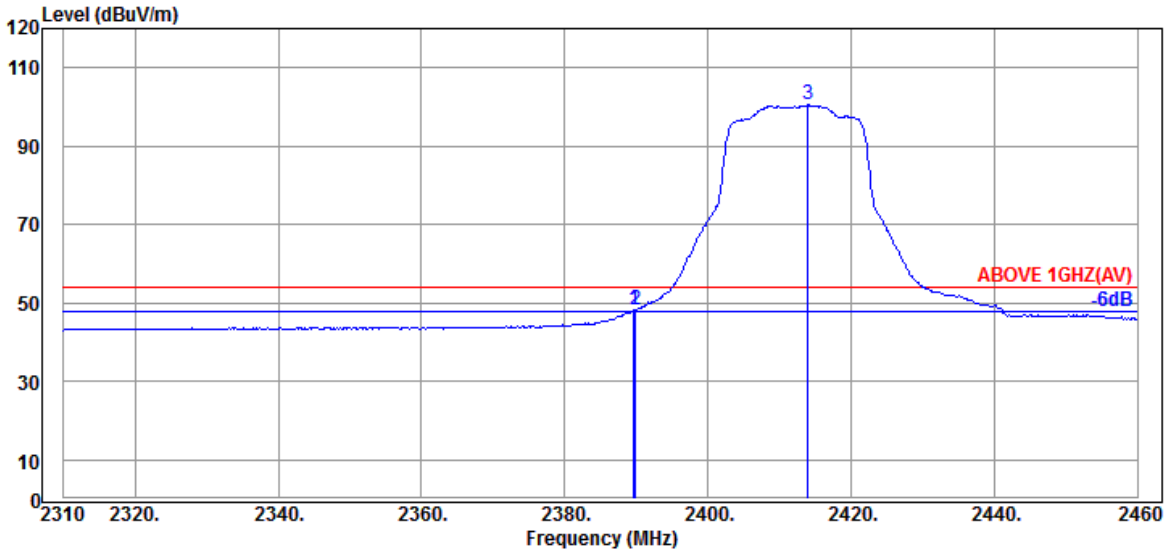


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	31.89	7.95	34.53	42.79	48.10	54.00	5.90	Average
2389.950	31.89	7.95	34.54	43.09	48.39	54.00	5.61	Average
@ 2413.950	31.94	7.96	34.54	95.08	100.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

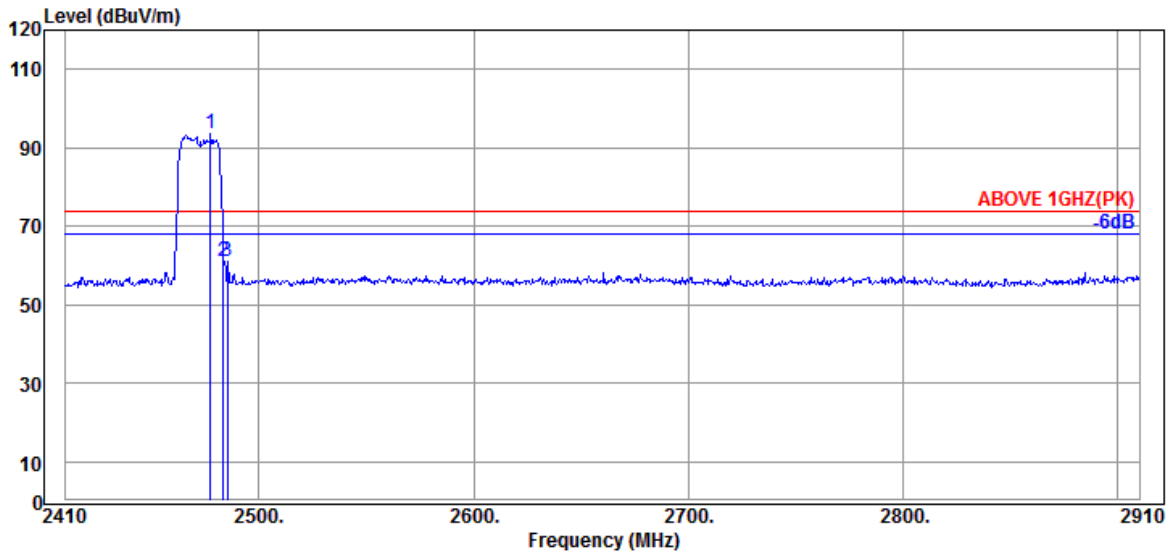

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	32.30	7.99	34.55	87.82	93.56	---	---	Peak
2483.500	32.30	7.99	34.55	55.29	61.03	74.00	12.97	Peak
2485.500	32.30	7.99	34.55	55.48	61.22	74.00	12.78	Peak

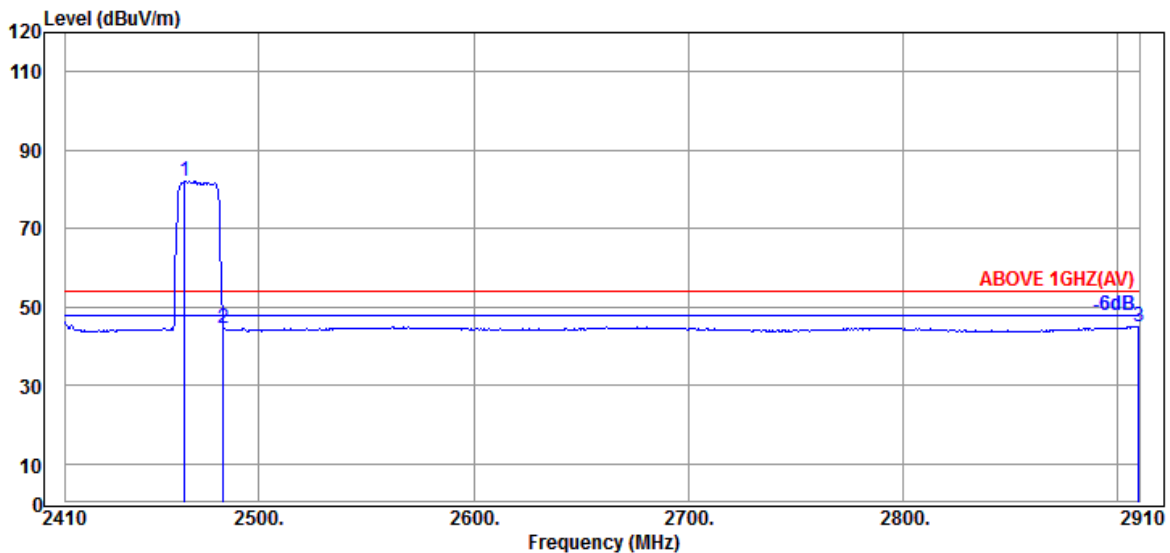


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	32.30	7.98	34.55	76.47	82.20	---	---	Average
2483.500	32.30	7.99	34.55	38.76	44.50	54.00	9.50	Average
2909.500	32.77	8.18	34.64	38.65	44.96	54.00	9.04	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

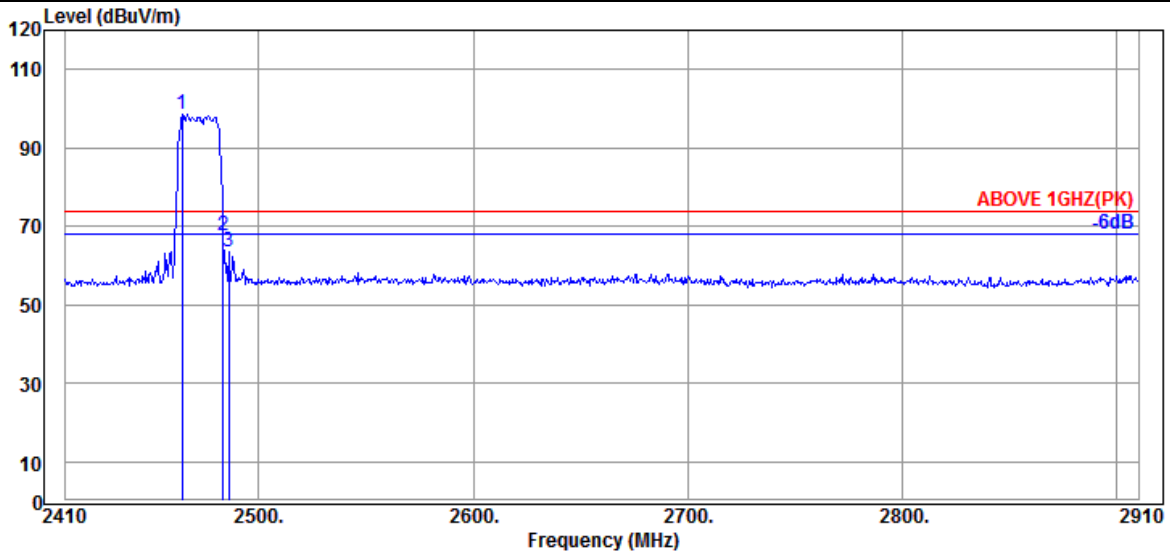

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	92.94	98.67	---	---	Peak
2483.500	32.30	7.99	34.55	61.75	67.49	74.00	6.51	Peak
2486.000	32.30	8.00	34.55	57.61	63.36	74.00	10.64	Peak

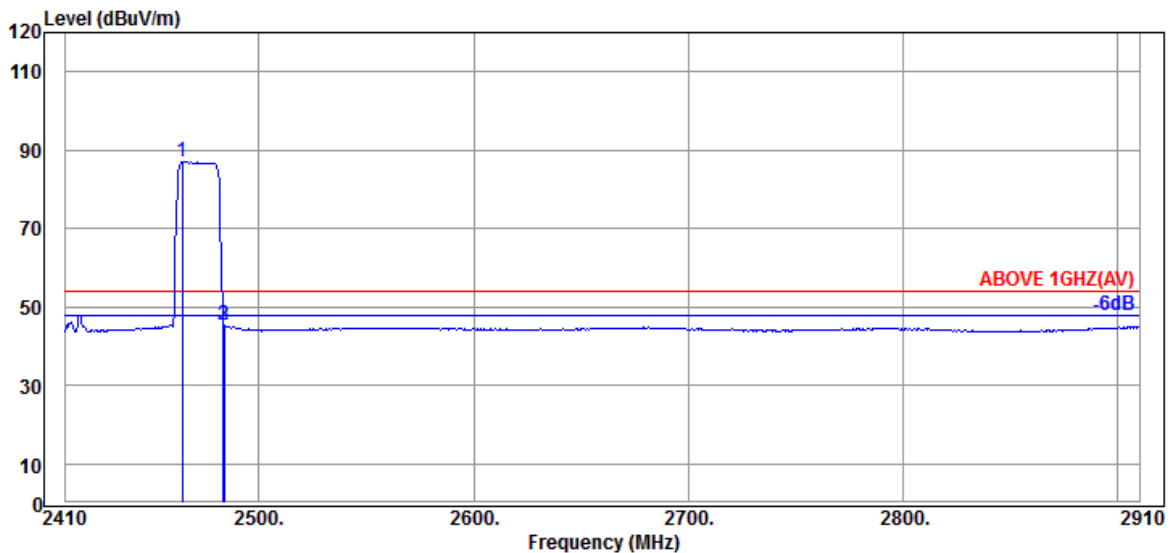


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.30	7.98	34.55	81.39	87.12	---	---	Average
2483.500	32.30	7.99	34.55	39.76	45.50	54.00	8.50	Average
2484.000	32.30	7.99	34.55	39.52	45.26	54.00	8.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

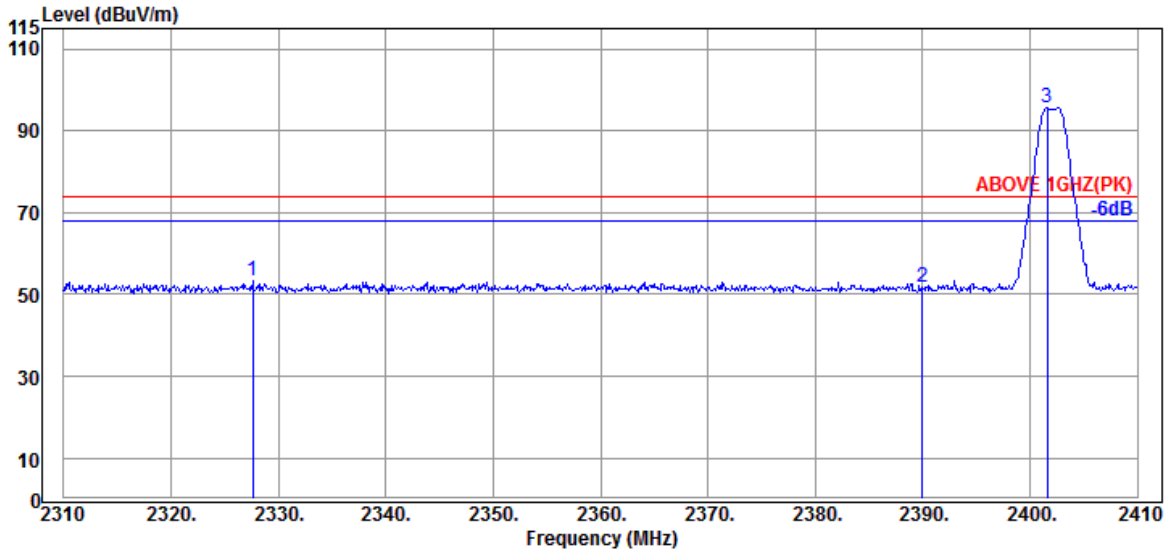

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2327.600	32.00	7.92	34.52	48.00	53.40	74.00	20.60	Peak
2390.000	31.89	7.95	34.54	46.40	51.70	74.00	22.30	Peak
@ 2401.600	31.80	7.95	34.54	90.41	95.62	---	---	Peak

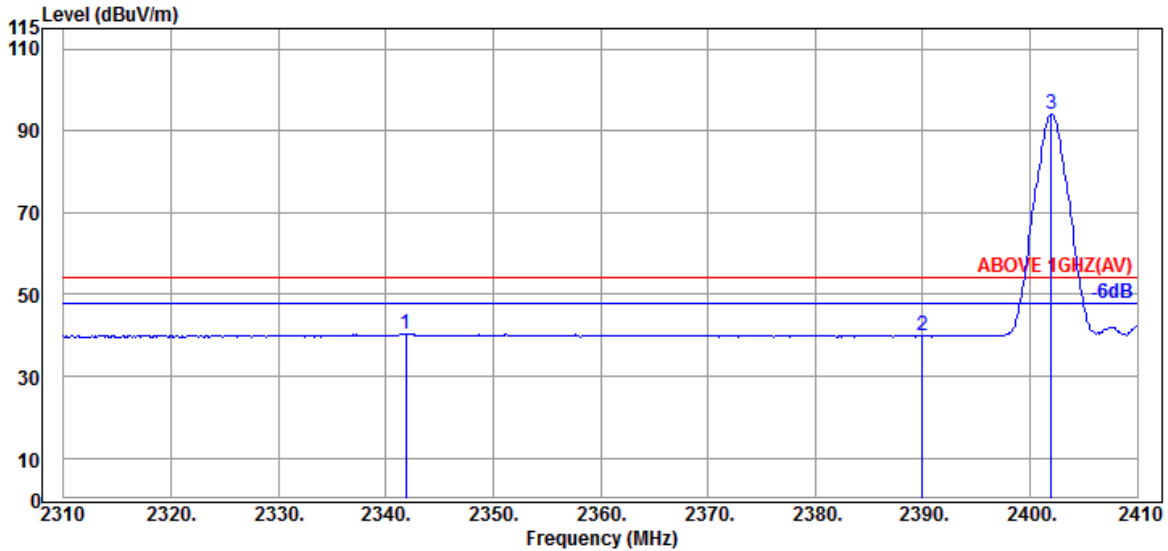


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	32.05	7.92	34.53	35.02	40.46	54.00	13.54	Average
2390.000	31.89	7.95	34.54	34.49	39.79	54.00	14.21	Average
@ 2402.000	31.80	7.95	34.54	88.81	94.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

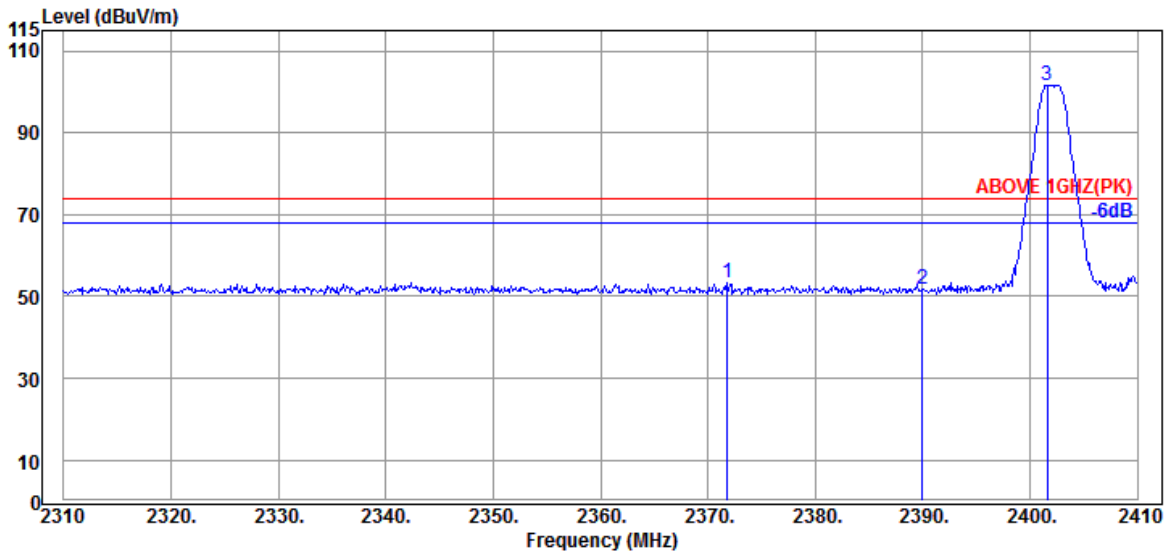

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2371.800	31.97	7.94	34.53	48.12	53.50	74.00	20.50	Peak
2390.000	31.89	7.95	34.54	46.46	51.76	74.00	22.24	Peak
@ 2401.600	31.80	7.95	34.54	96.49	101.70	---	---	Peak

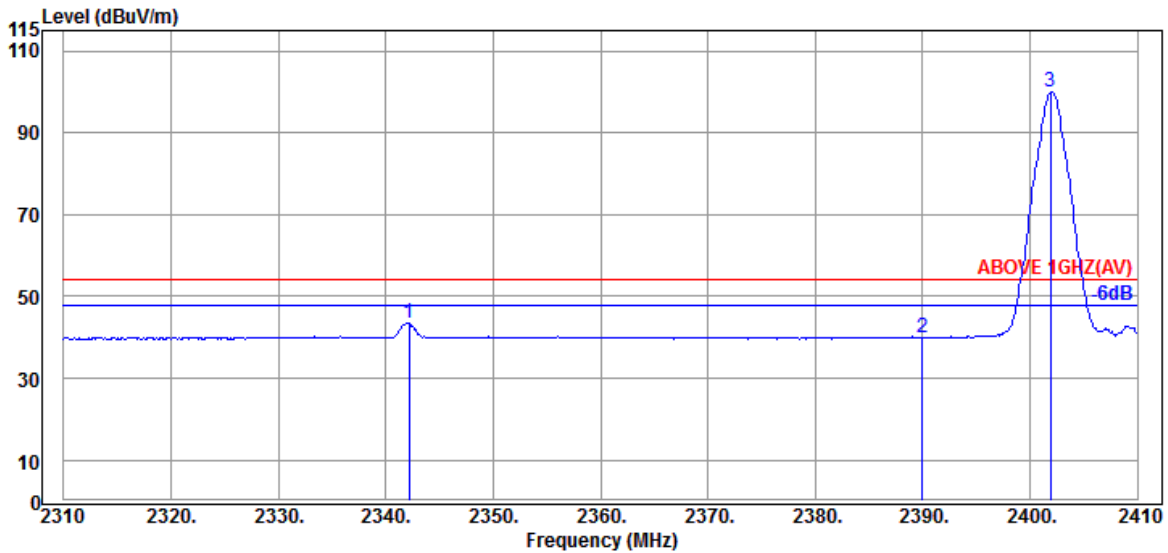


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2342.200	32.05	7.92	34.53	38.13	43.57	54.00	10.43	Average
2390.000	31.89	7.95	34.54	34.63	39.93	54.00	14.07	Average
@ 2401.900	31.80	7.95	34.54	94.79	100.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

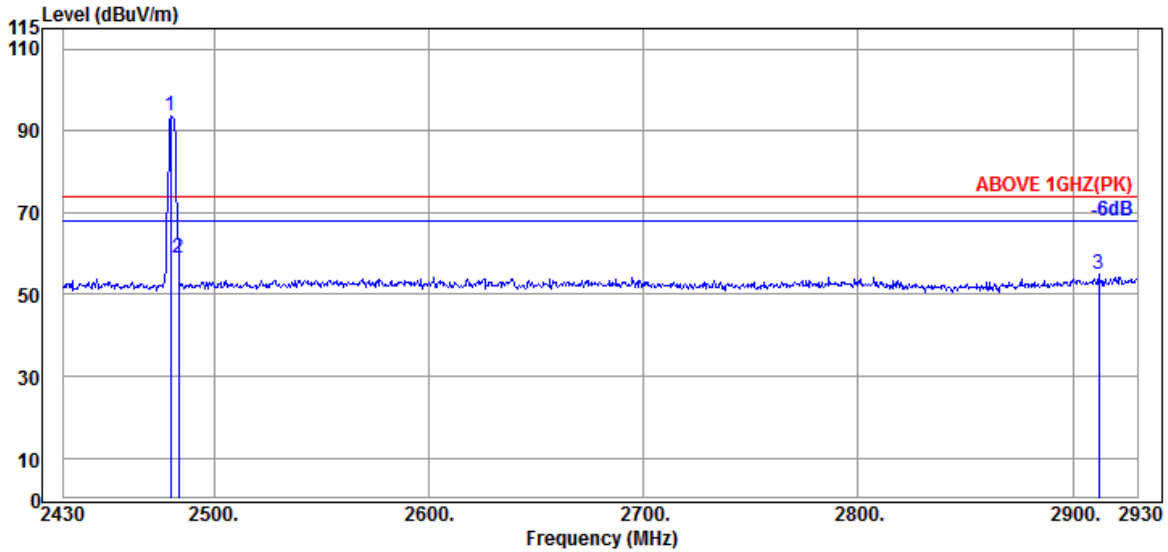

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	87.73	93.47	---	---	Peak
2483.500	32.30	7.99	34.55	53.01	58.75	74.00	15.25	Peak
2912.000	32.83	8.18	34.64	48.67	55.04	74.00	18.96	Peak

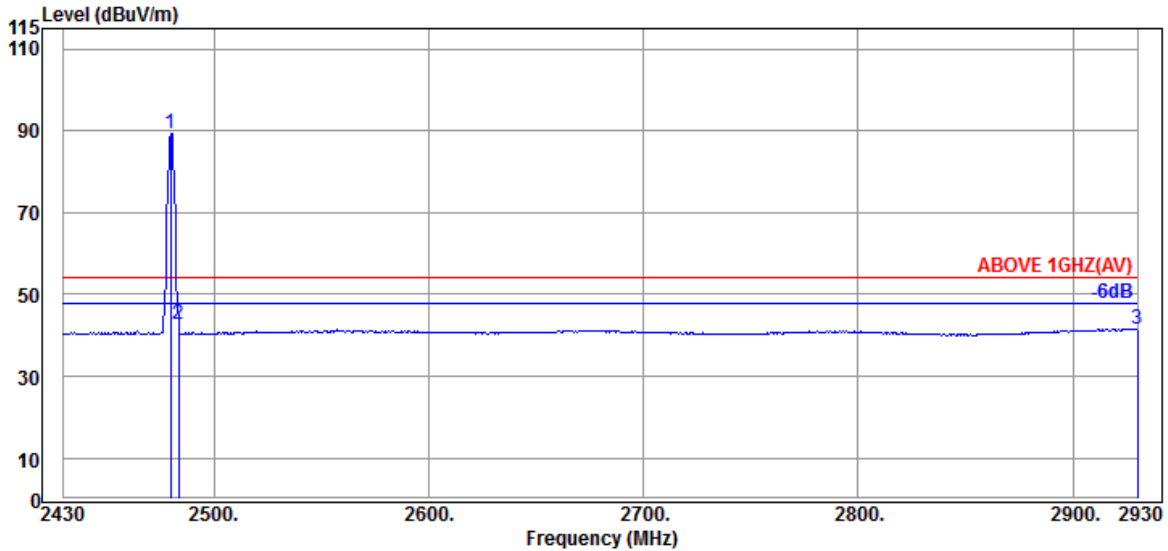


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	83.70	89.44	---	---	Average
2483.500	32.30	7.99	34.55	37.12	42.86	54.00	11.14	Average
2930.000	32.97	8.19	34.65	35.02	41.53	54.00	12.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

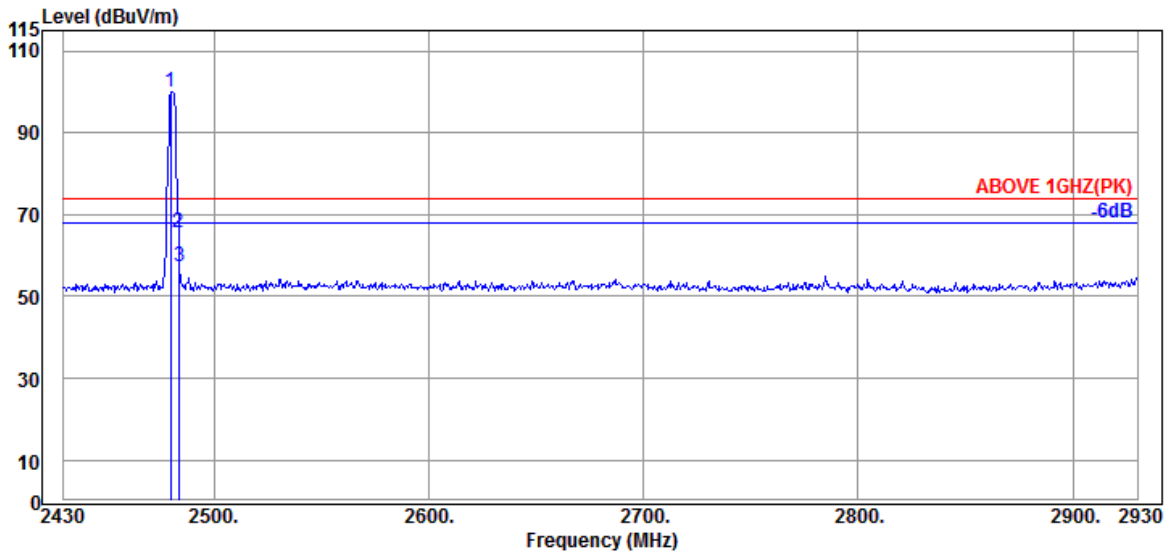

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	94.23	99.97	---	---	Peak
2483.500	32.30	7.99	34.55	59.88	65.62	74.00	8.38	Peak
2484.000	32.30	7.99	34.55	51.41	57.15	74.00	16.85	Peak

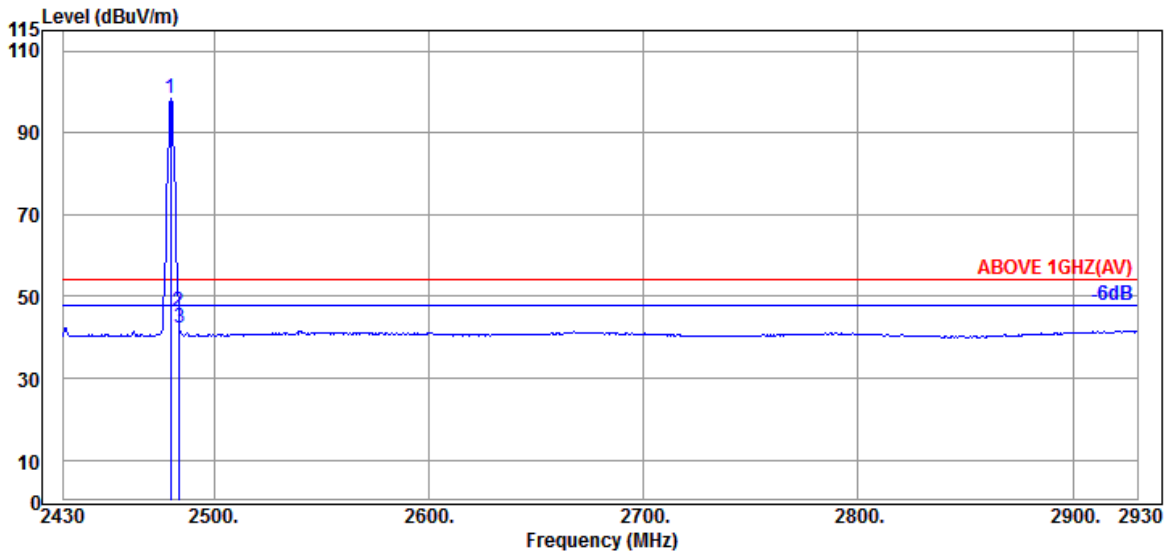

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.30	7.99	34.55	92.62	98.36	---	---	Average
2483.500	32.30	7.99	34.55	40.48	46.22	54.00	7.78	Average
2484.000	32.30	7.99	34.55	36.42	42.16	54.00	11.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.15	41.14	54.00	12.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.53	41.52	54.00	12.48	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.52	42.51	54.00	11.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.19	42.18	54.00	11.82	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.12	42.11	54.00	11.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.31	41.30	54.00	12.70	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.17	42.16	54.00	11.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.61	41.60	54.00	12.40	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.18	42.17	54.00	11.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.49	41.48	54.00	12.52	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	32.16	42.15	54.00	11.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.88	10.54	34.43	31.50	41.49	54.00	12.51	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz					
------	----------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	31.79	41.44	54.00	12.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.60	10.49	34.44	32.39	42.04	54.00	11.96	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz					
------	----------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	10.54	34.43	30.77	40.73	54.00	13.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.85	10.54	34.43	31.96	41.92	54.00	12.08	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz					
------	----------	-----------	------------	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	31.75	41.77	54.00	12.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.83	10.60	34.41	30.97	40.99	54.00	13.01	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.