

Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)

Date: 8/13/2021

Test Laboratory: Audix\_SAR Lab

**P33 802.11b CH7 2442MHz ant1 Bottom****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.778$  S/m;  $\epsilon_r = 39.572$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x9x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.0141 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.3342 V/m; Power Drift = 0.99 dB


Peak SAR (extrapolated) = 0.0290 W/kg

**SAR(1 g) = 0.00789 W/kg; SAR(10 g) = 0.0016 W/kg**

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 82.6%

Maximum value of SAR (measured) = 0.0241 W/kg

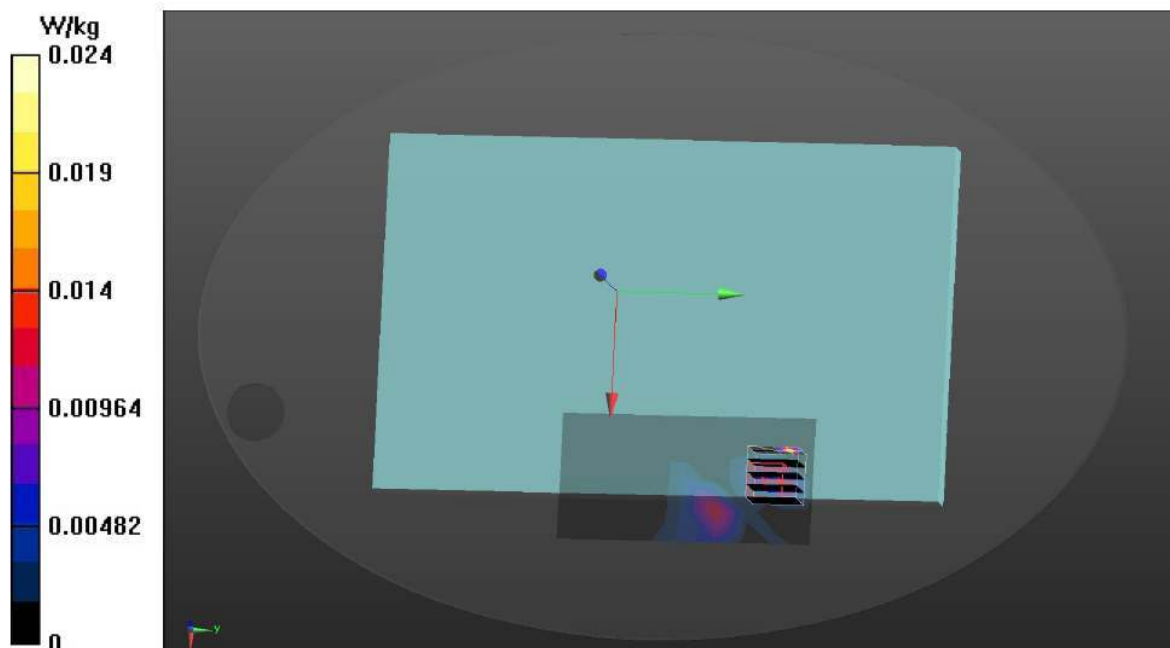

Date: 8/13/2021

Test Laboratory: Audix\_SAR Lab

**P7 802.11b CH7 2442MHz ant1 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.778$  S/m;  $\epsilon_r = 39.572$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x9x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.453 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.7889 V/m; Power Drift = 0.27 dB


Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.193 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 0.878 W/kg

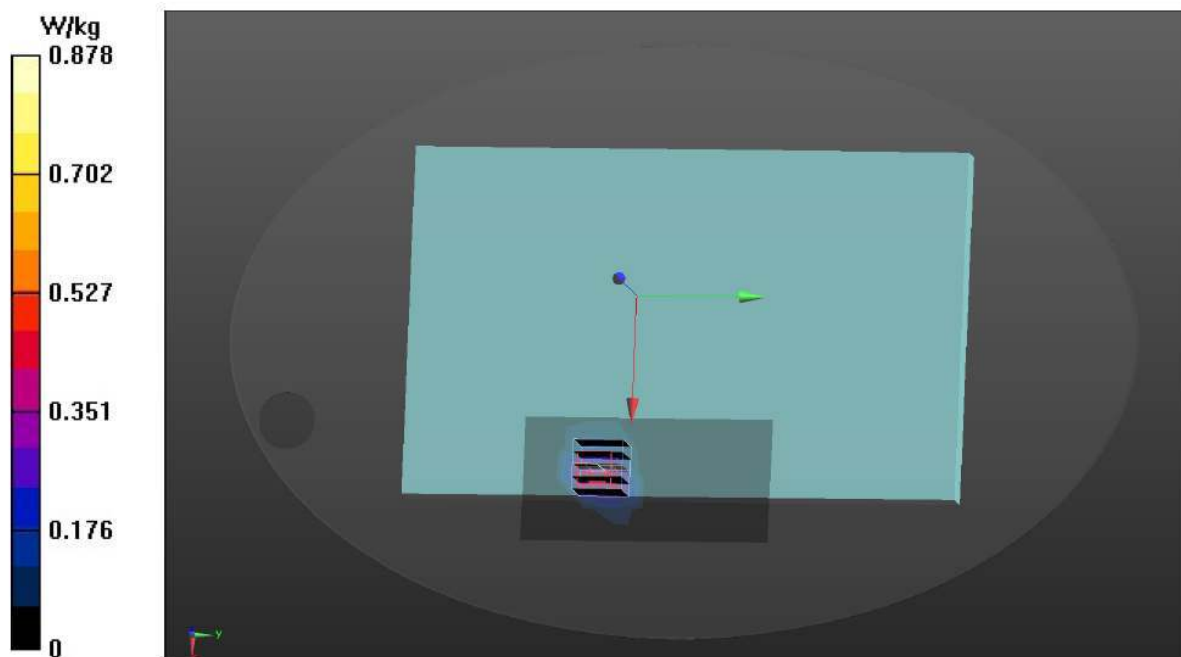

Date: 8/13/2021

Test Laboratory: Audix\_SAR Lab

**P34 802.11b CH7 2442MHz ant2 Bottom****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.778$  S/m;  $\epsilon_r = 39.572$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x9x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.277 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.6891 V/m; Power Drift = 0.55 dB


Peak SAR (extrapolated) = 0.486 W/kg

**SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.122 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.370 W/kg

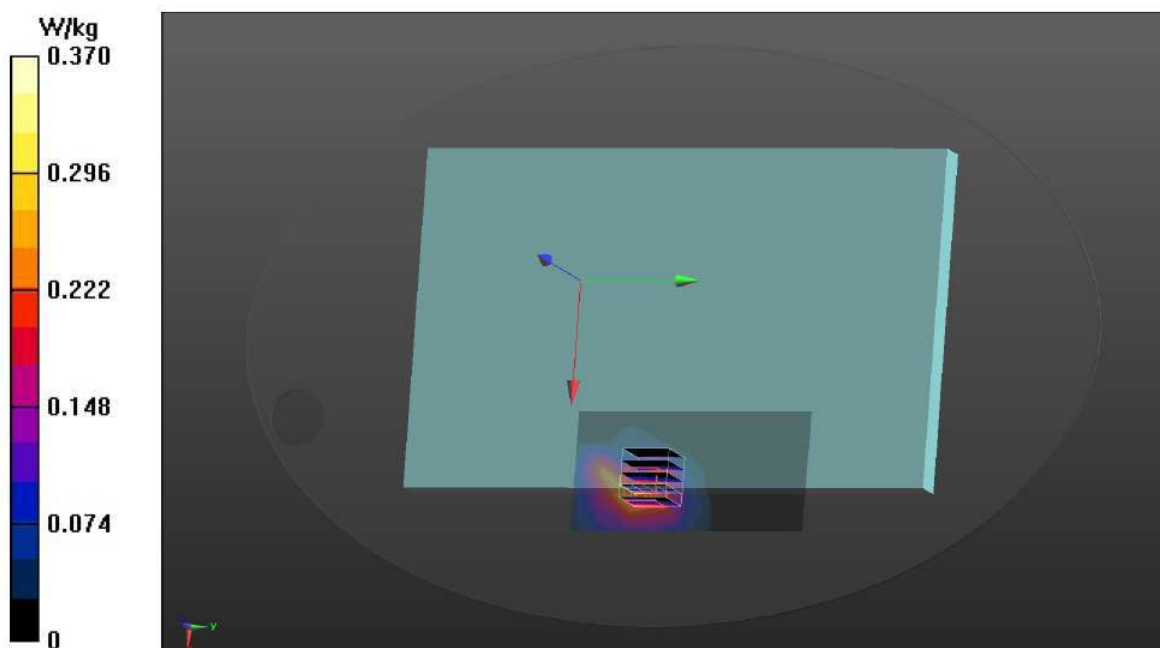

Date: 8/13/2021

Test Laboratory: Audix\_SAR Lab

**P8 802.11b CH7 2442MHz ant2 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.778$  S/m;  $\epsilon_r = 39.572$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x9x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (measured) = 1.28 W/kg**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.282 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.359 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 1.20 W/kg

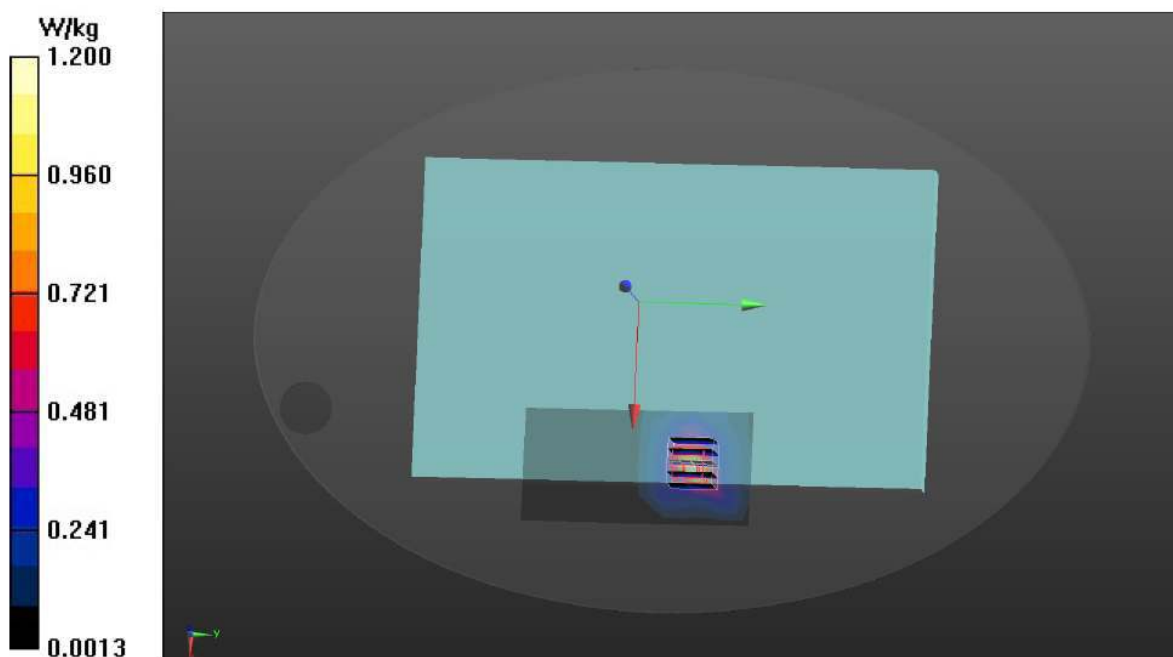



Date: 8/13/2021

Test Laboratory: Audix\_SAR Lab

**P35 GFSK CH39 2441MHz Bottom****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.777$  S/m;  $\epsilon_r = 39.575$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2441 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x9x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.0162 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.3477 V/m; Power Drift = 0.27 dB


Peak SAR (extrapolated) = 0.0300 W/kg

**SAR(1 g) = 0.00811 W/kg; SAR(10 g) = 0.00166 W/kg**

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 36.6%

Maximum value of SAR (measured) = 0.0207 W/kg

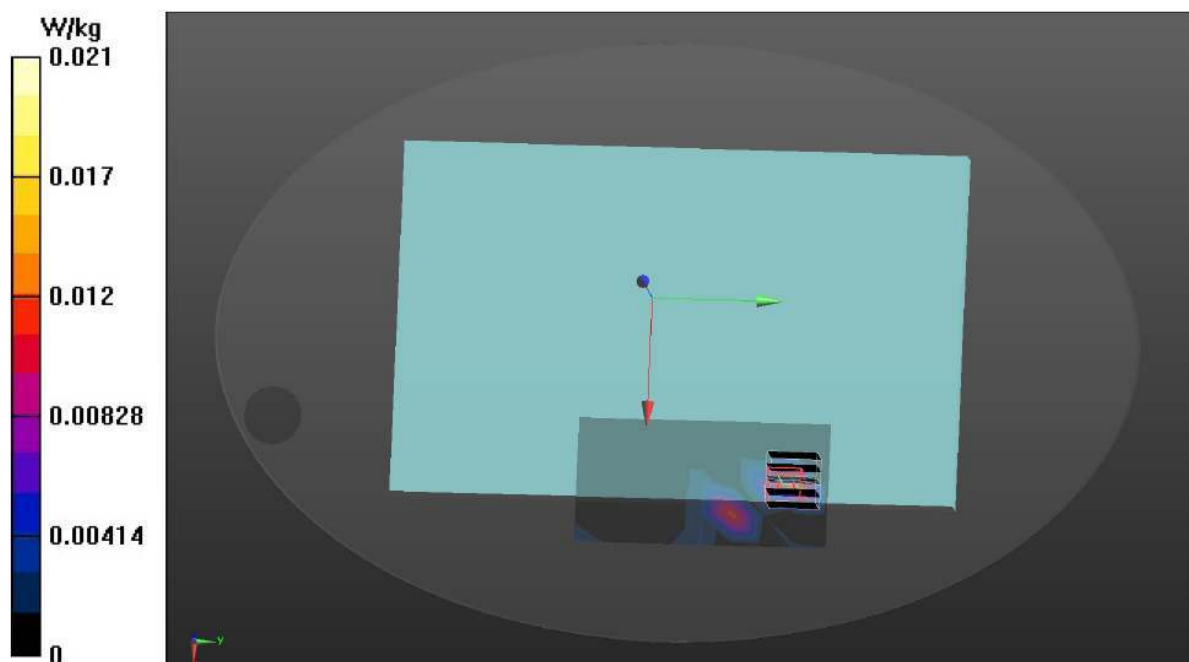

Date: 8/13/2021

Test Laboratory: Audix\_SAR Lab

**P9 GFSK CH39 2441MHz Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.777$  S/m;  $\epsilon_r = 39.575$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2441 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (5x9x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.0688 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.5952 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.147 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.033 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 0.111 W/kg

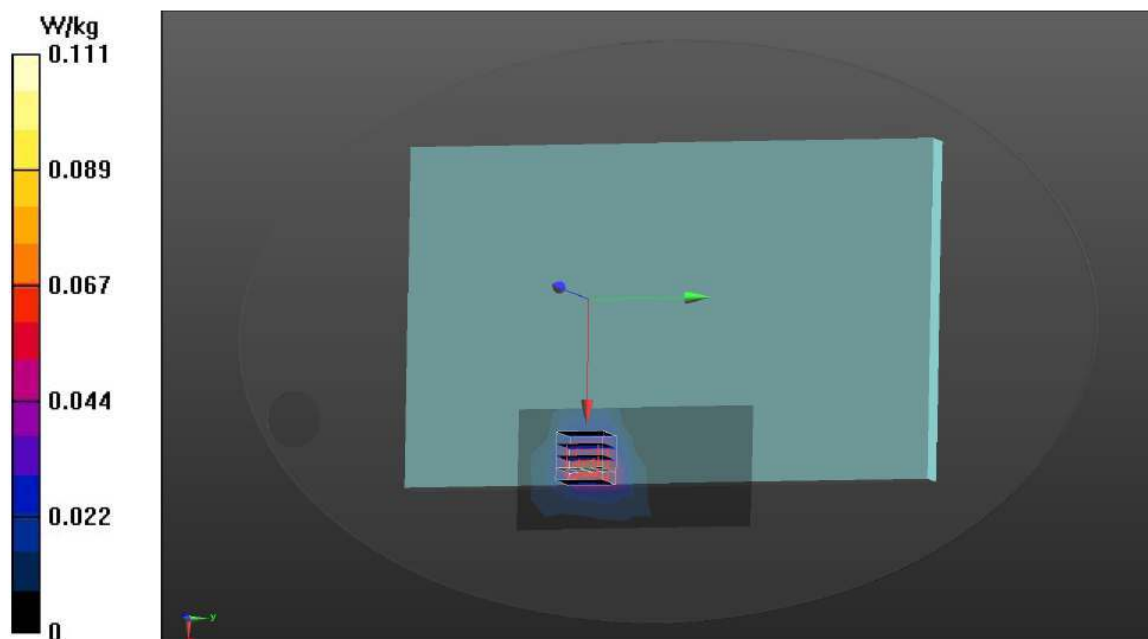

Date: 8/9/2021

Test Laboratory: Audix\_SAR Lab

**P11 802.11a CH48 5240MHz ant1 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.555$  S/m;  $\epsilon_r = 36.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.3, 5.3, 5.3) @ 5240 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.29 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.4856 V/m; Power Drift = -0.78 dB


Peak SAR (extrapolated) = 2.41 W/kg

**SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.244 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.42 W/kg

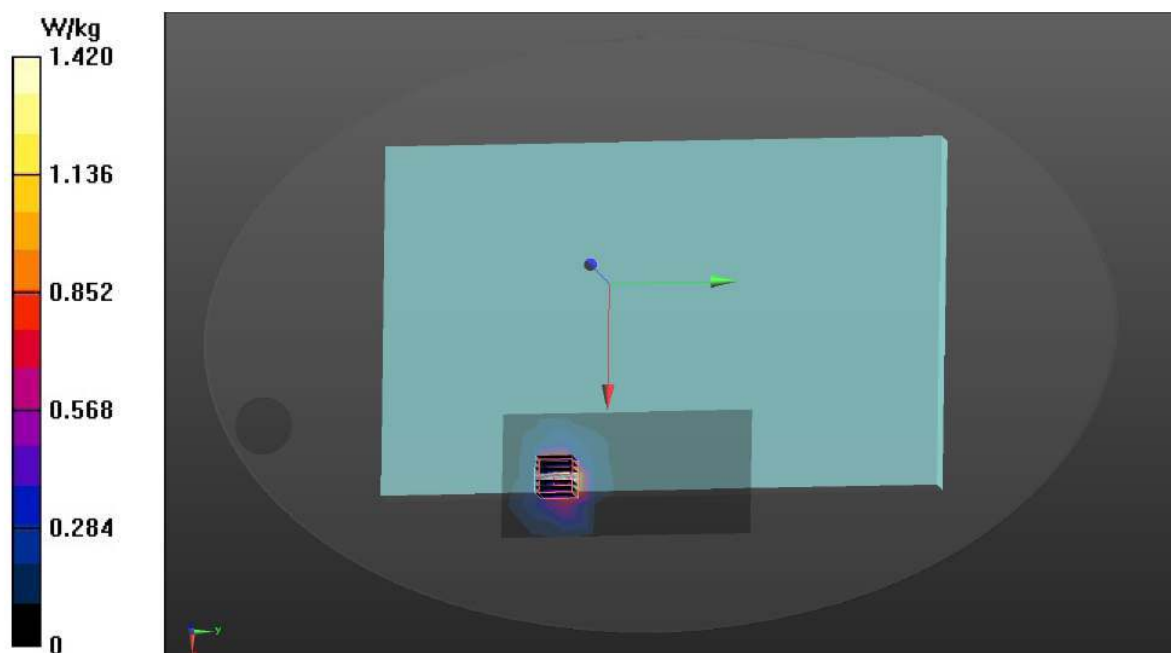

Date: 8/9/2021

Test Laboratory: Audix\_SAR Lab

**P1 802.11a CH52 5260MHz ant1 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.597$  S/m;  $\epsilon_r = 36.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.15, 5.15, 5.15) @ 5260 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.83 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.6580 V/m; Power Drift = -1.50 dB


Peak SAR (extrapolated) = 3.48 W/kg

**SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.261 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 2.12 W/kg

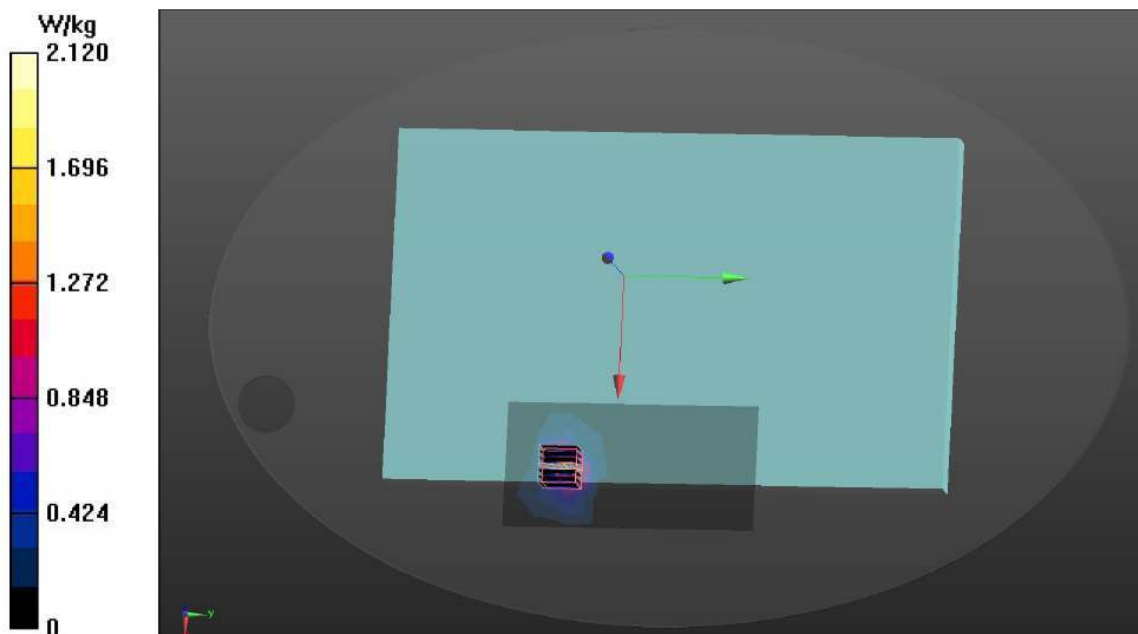



Date: 8/9/2021


Test Laboratory: Audix\_SAR Lab

**P12 802.11a CH48 5240MHz ant2 Screen****DUT: 15Z95P(LUXSHARE)**Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.555$  S/m;  $\epsilon_r = 36.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.3, 5.3, 5.3) @ 5240 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

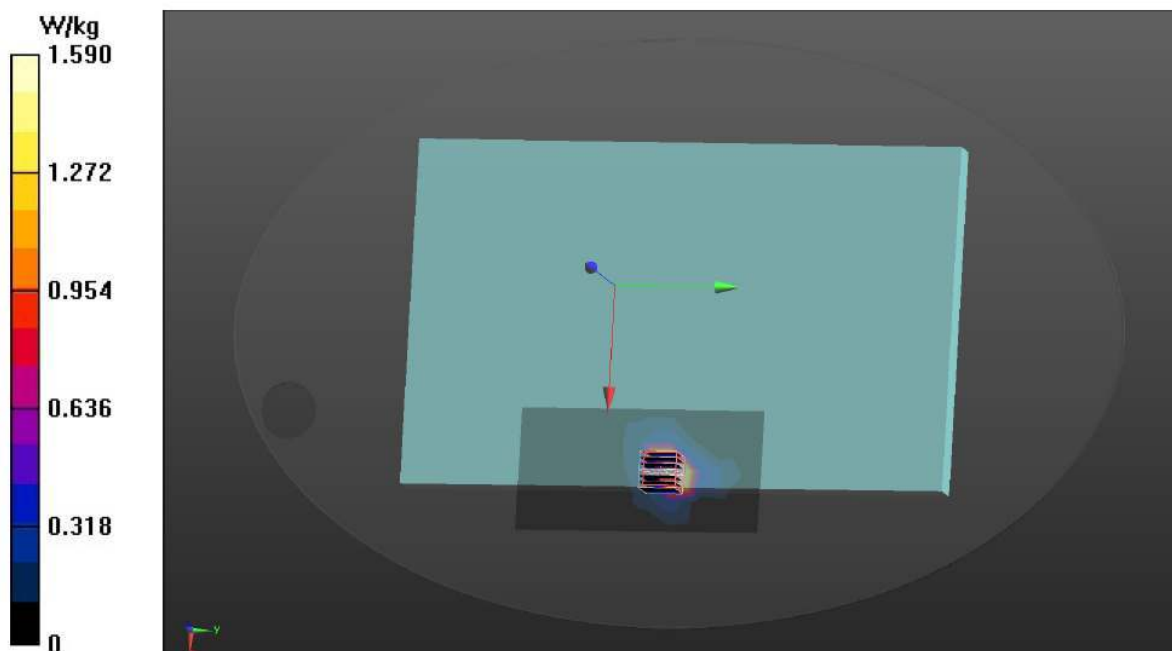**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm  
Maximum value of SAR (measured) = 1.62 W/kg**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm  
Reference Value = 0.6682 V/m; Power Drift = 0.44 dB  
Peak SAR (extrapolated) = 2.89 W/kg  
**SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.231 W/kg**  
Smallest distance from peaks to all points 3 dB below = 4.7 mm  
Ratio of SAR at M2 to SAR at M1 = 55.8%  
Maximum value of SAR (measured) = 1.59 W/kg

Date: 8/9/2021


Test Laboratory: Audix\_SAR Lab

**P2 802.11a CH52 5260MHz ant2 Screen****DUT: 15Z95P(LUXSHARE)**Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.597$  S/m;  $\epsilon_r = 36.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.15, 5.15, 5.15) @ 5260 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

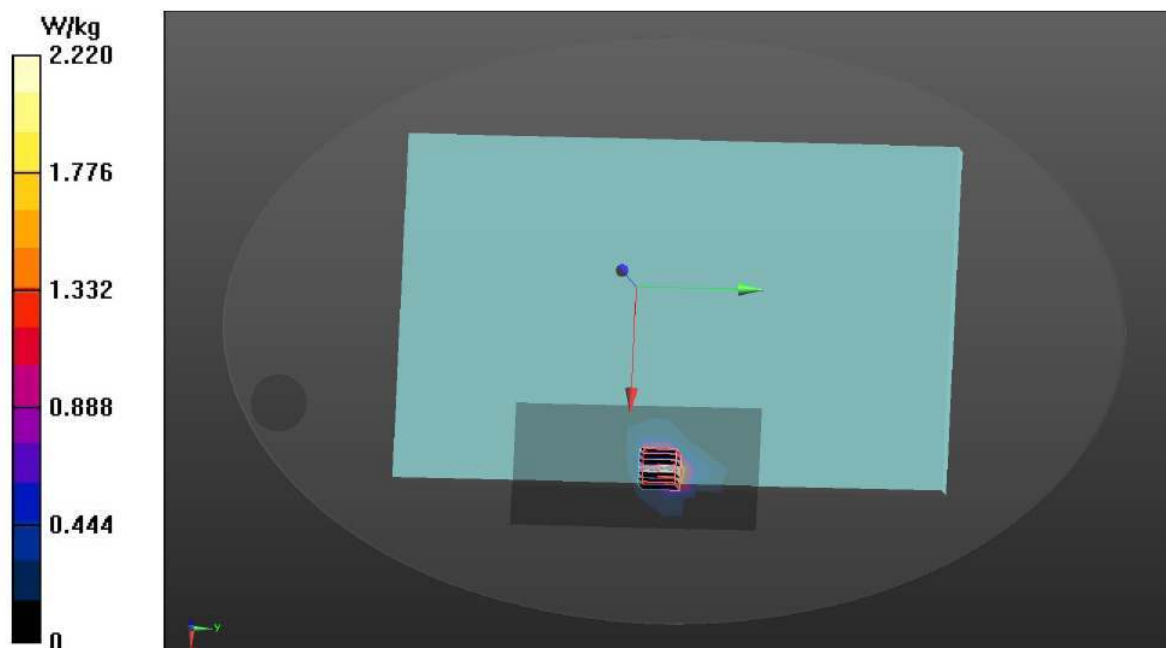**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm  
Maximum value of SAR (measured) = 2.09 W/kg**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm  
Reference Value = 0.6450 V/m; Power Drift = 0.74 dB  
Peak SAR (extrapolated) = 3.86 W/kg  
**SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.287 W/kg**  
Smallest distance from peaks to all points 3 dB below = 4.1 mm  
Ratio of SAR at M2 to SAR at M1 = 59.6%  
Maximum value of SAR (measured) = 2.22 W/kg

Date: 8/11/2021

Test Laboratory: Audix\_SAR Lab

**P13 802.11a CH100 5500MHz ant1 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.838$  S/m;  $\epsilon_r = 36.207$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.9, 4.9, 4.9) @ 5500 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.78 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.6668 V/m; Power Drift = 1.54 dB


Peak SAR (extrapolated) = 6.21 W/kg

**SAR(1 g) = 0.767 W/kg; SAR(10 g) = 0.226 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 2.27 W/kg

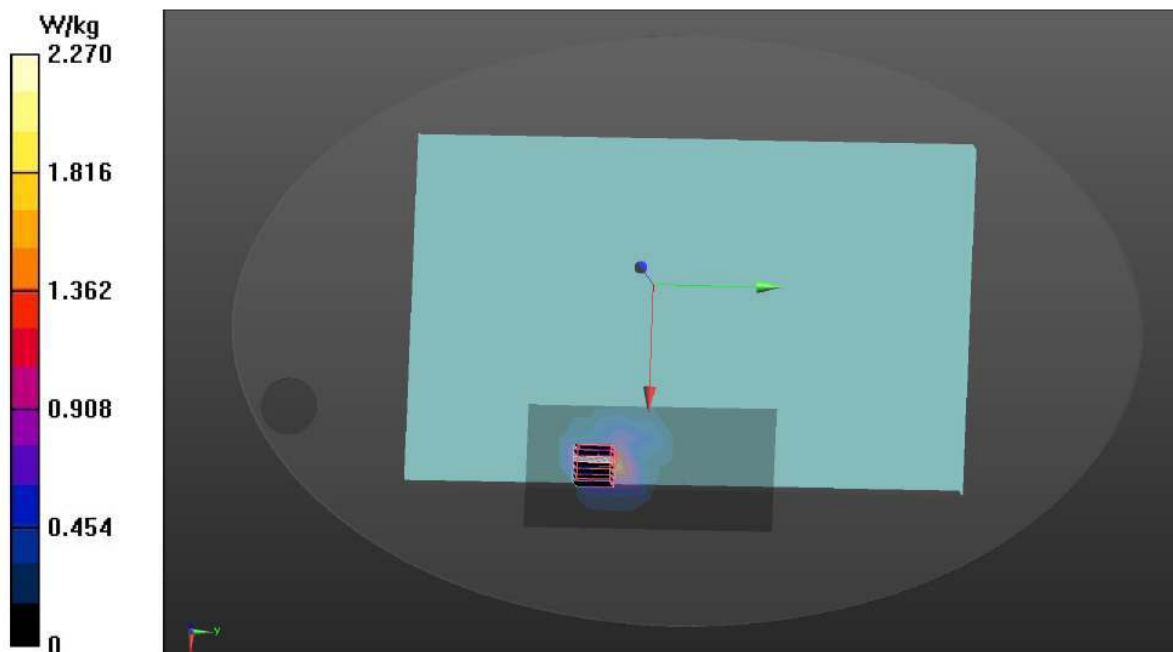

Date: 8/16/2021

Test Laboratory: Audix\_SAR Lab

**P31 802.11a CH116 5580MHz ant1 Bottom****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.9$  S/m;  $\epsilon_r = 35.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.83, 4.83, 4.83) @ 5580 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.771 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.7225 V/m; Power Drift = 0.29 dB


Peak SAR (extrapolated) = 2.69 W/kg

**SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.209 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 1.30 W/kg

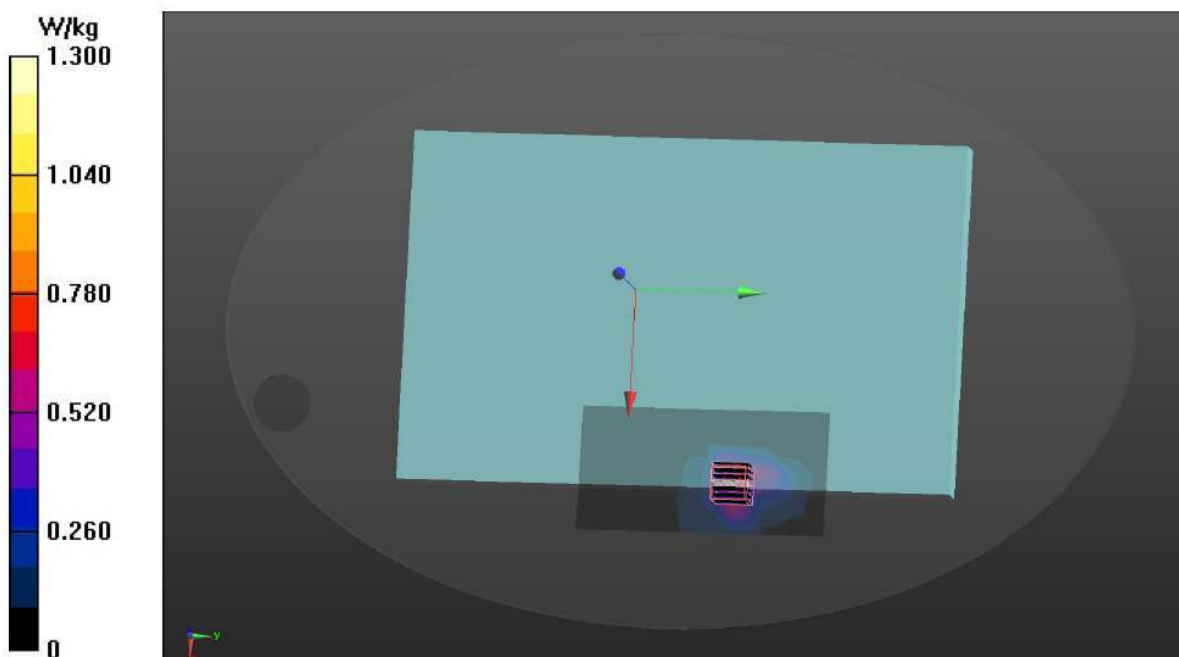



Date: 8/11/2021

Test Laboratory: Audix\_SAR Lab

**P3 802.11a CH116 5580MHz ant1 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.9$  S/m;  $\epsilon_r = 35.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.83, 4.83, 4.83) @ 5580 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.78 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.8156 V/m; Power Drift = 0.35 dB


Peak SAR (extrapolated) = 6.34 W/kg

**SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.316 W/kg**

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 2.48 W/kg

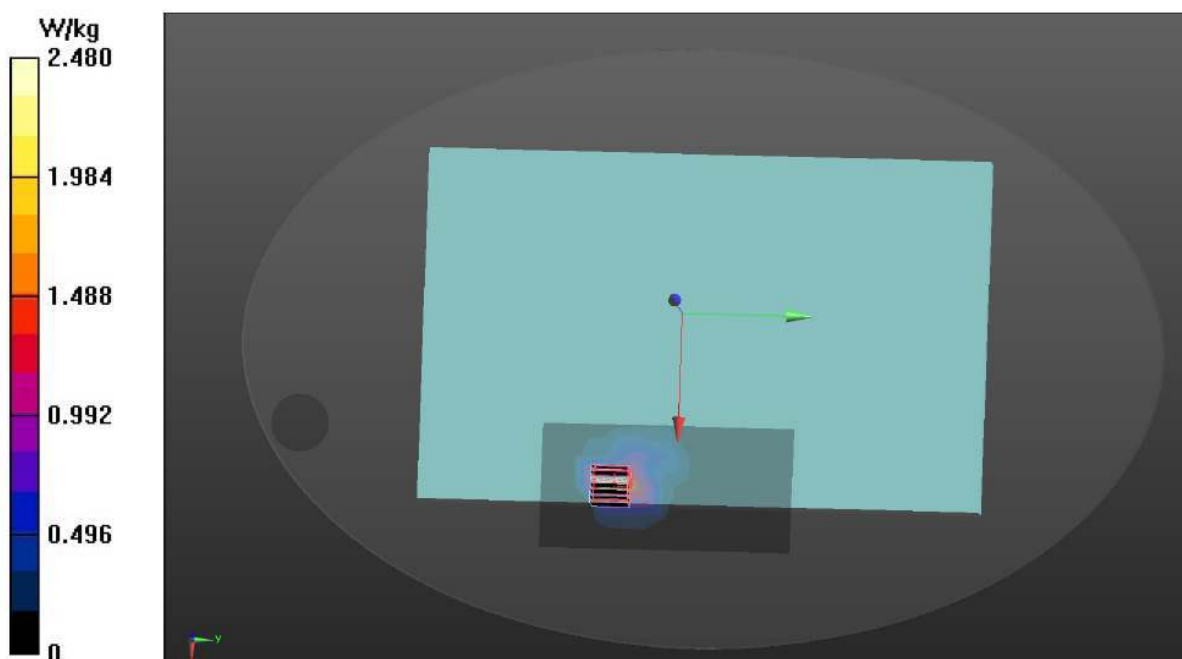

Date: 8/11/2021

Test Laboratory: Audix\_SAR Lab

**P14 802.11a CH100 5500MHz ant2 Screen****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.838$  S/m;  $\epsilon_r = 36.207$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.9, 4.9, 4.9) @ 5500 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.965 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.7455 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 3.03 W/kg

**SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.191 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.945 W/kg

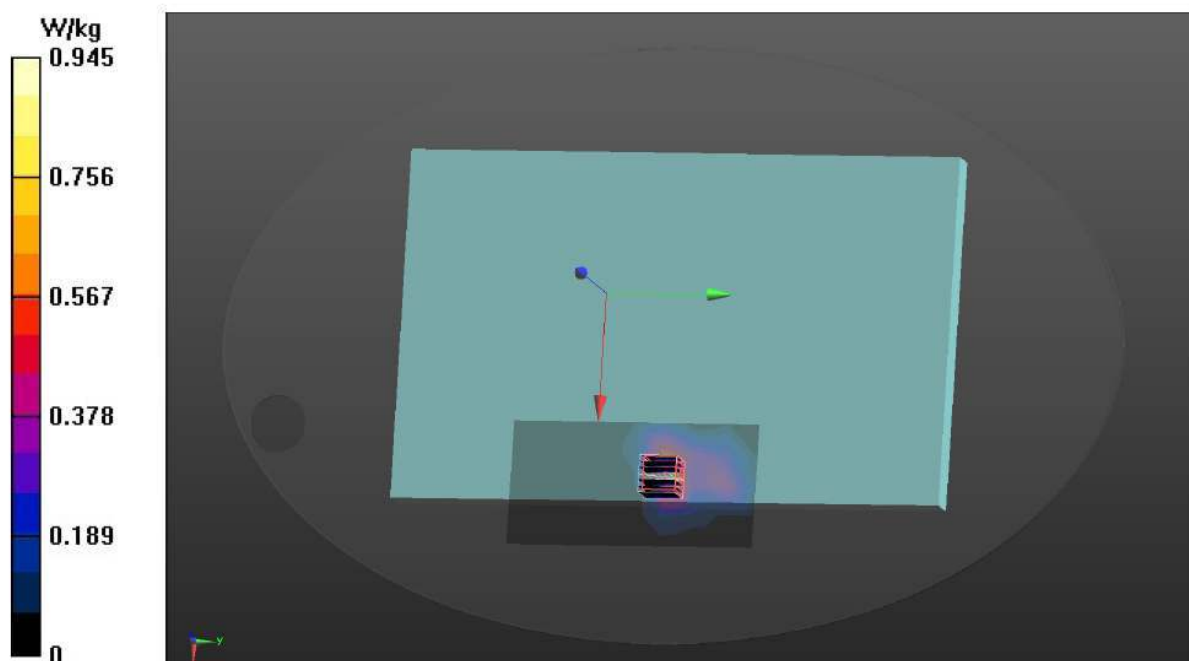

Date: 8/16/2021

Test Laboratory: Audix\_SAR Lab

**P32 802.11a CH116 5580MHz ant2 Bottom****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.9$  S/m;  $\epsilon_r = 35.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.83, 4.83, 4.83) @ 5580 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.439 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.3510 V/m; Power Drift = 0.62 dB


Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.124 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.681 W/kg

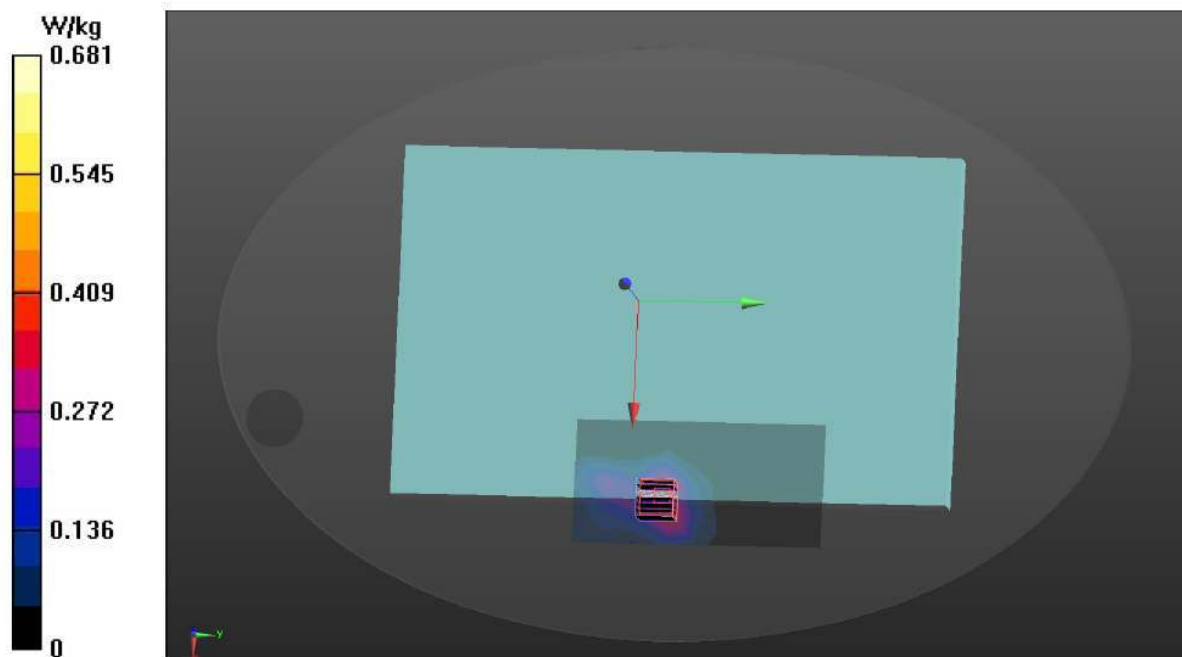

Date: 8/11/2021

Test Laboratory: Audix\_SAR Lab

**P4 802.11a CH116 5580MHz ant2 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.9$  S/m;  $\epsilon_r = 35.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.83, 4.83, 4.83) @ 5580 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.801 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.8230 V/m; Power Drift = -1.08 dB


Peak SAR (extrapolated) = 3.71 W/kg

**SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.234 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 1.82 W/kg

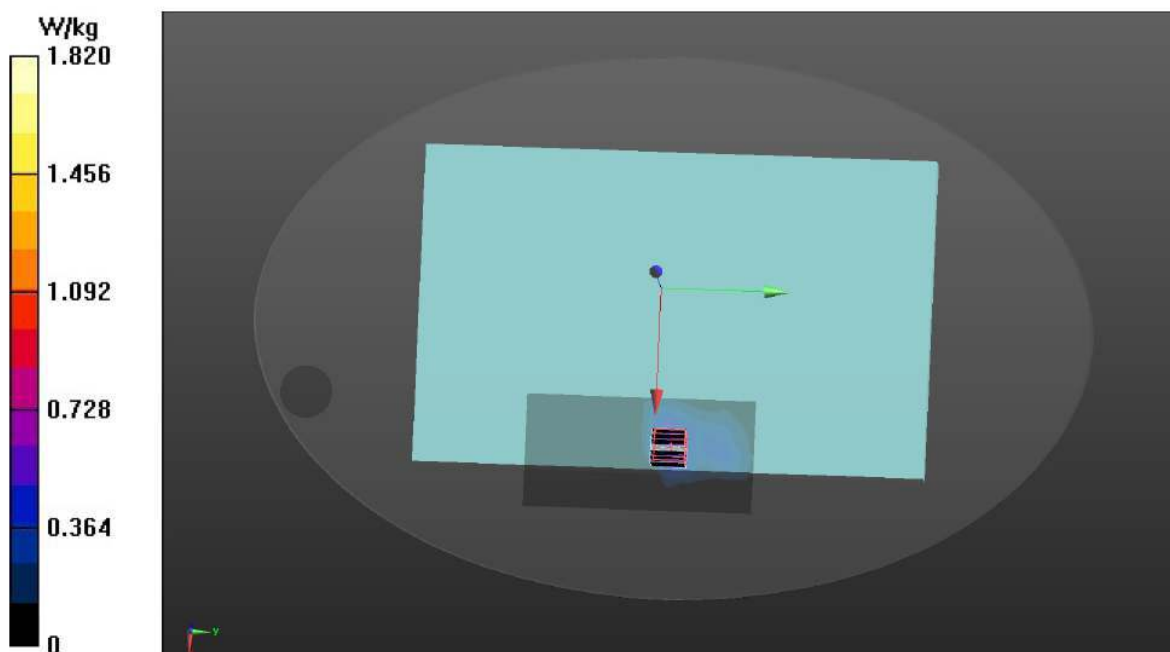



Date: 8/12/2021

Test Laboratory: Audix\_SAR Lab

**P5 802.11a CH157 5785MHz ant1 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.028$  S/m;  $\epsilon_r = 35.731$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5785 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.99 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 1.659 V/m; Power Drift = -0.39 dB


Peak SAR (extrapolated) = 3.78 W/kg

**SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.178 W/kg**

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 62.2%

Maximum value of SAR (measured) = 2.10 W/kg

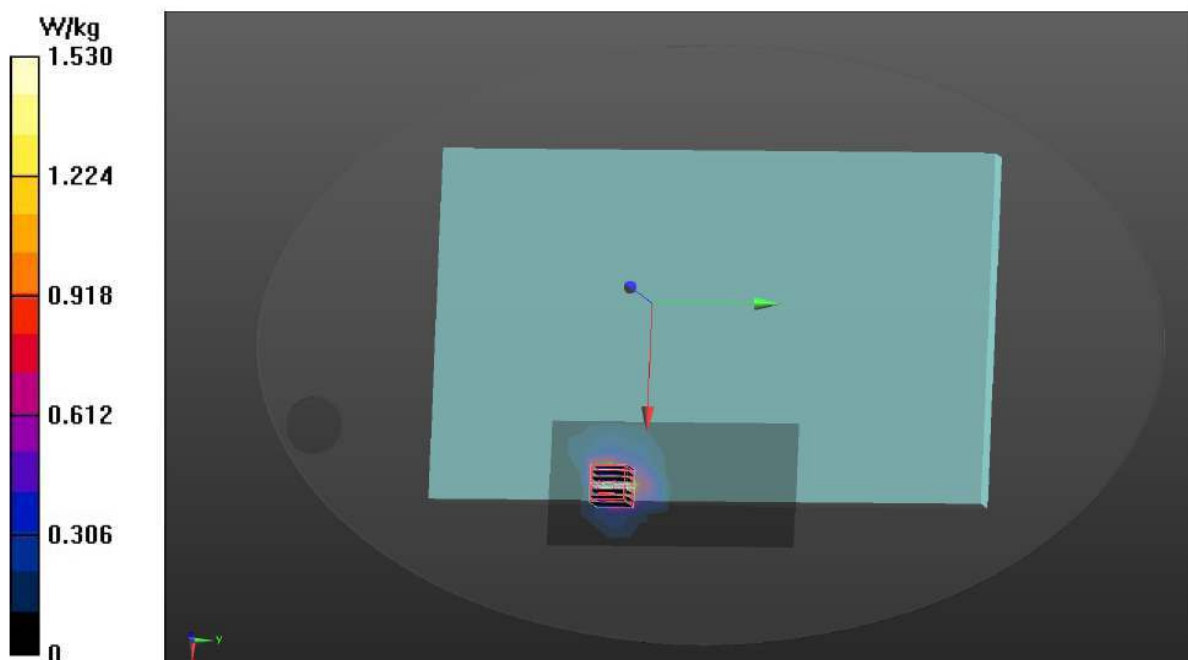

Date: 8/12/2021

Test Laboratory: Audix\_SAR Lab

**P6 802.11a CH157 5785MHz ant2 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.028$  S/m;  $\epsilon_r = 35.731$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5785 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.980 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.4716 V/m; Power Drift = 0.54 dB


Peak SAR (extrapolated) = 2.74 W/kg

**SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.185 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 1.36 W/kg

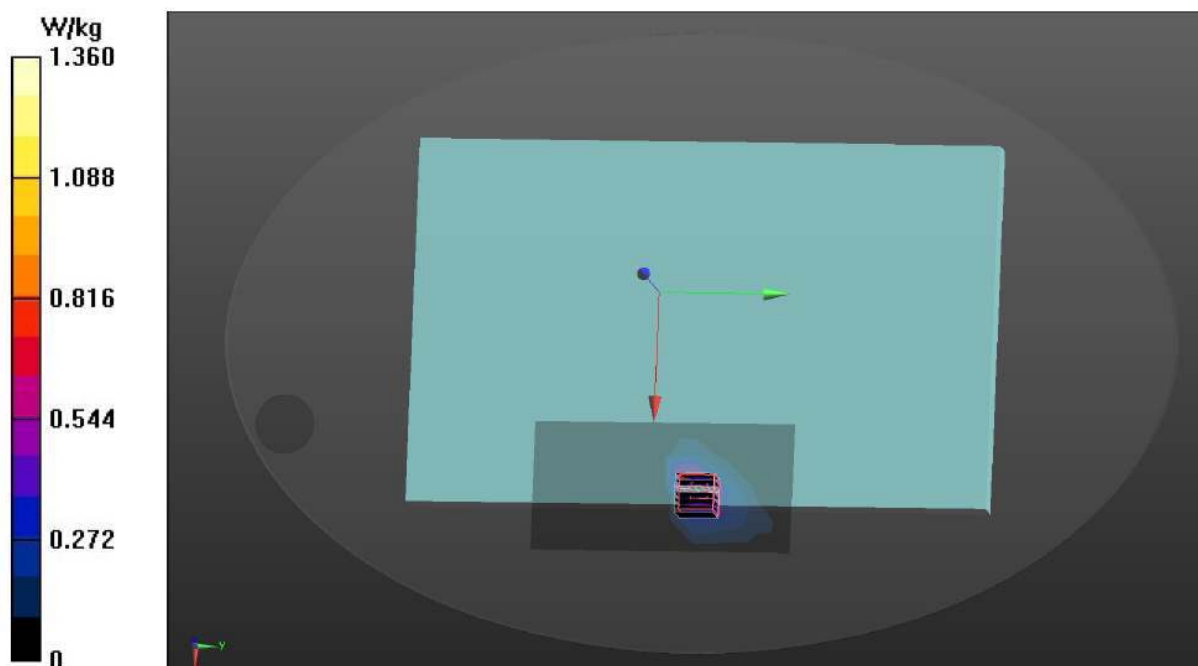

**Repeated SAR measurement**

Test SKU: SKU #1 (with INPAQ Antenna)

Date: 8/13/2021

Test Laboratory: Audix\_SAR Lab

**P27 802.11b CH7 2442MHz ant1 Screen****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.778$  S/m;  $\epsilon_r = 39.572$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.36 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.225 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.58 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.499 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 1.96 W/kg

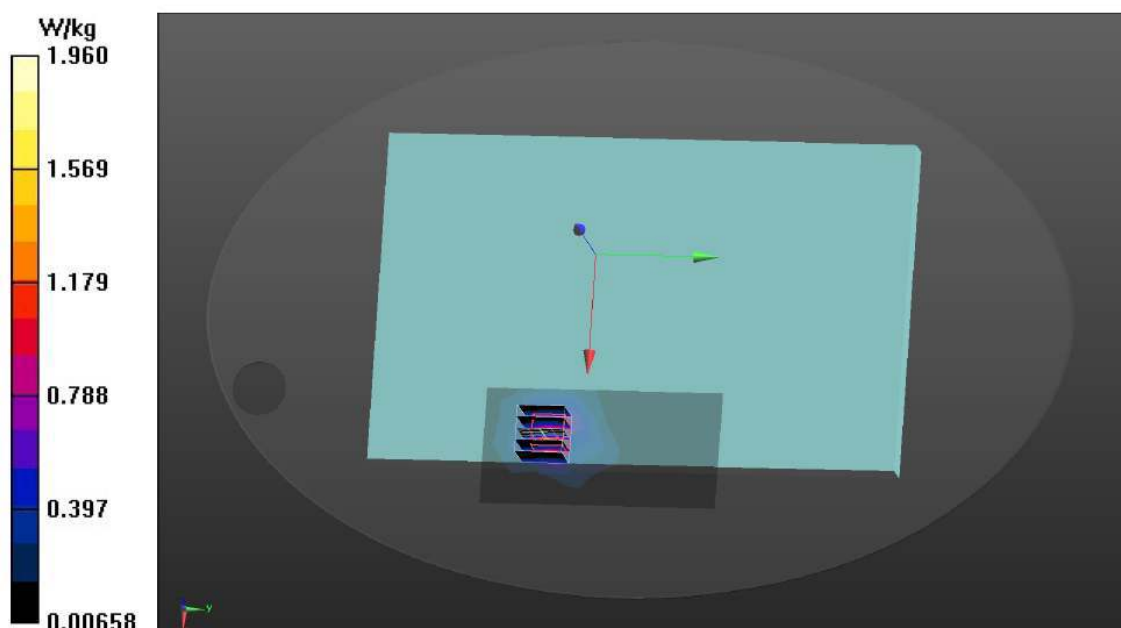

Date: 8/11/2021

Test Laboratory: Audix\_SAR Lab

**P24 802.11a CH100 5500MHz ant2 Screen****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.838$  S/m;  $\epsilon_r = 36.207$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.9, 4.9, 4.9) @ 5500 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.96 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.9510 V/m; Power Drift = 0.55 dB


Peak SAR (extrapolated) = 3.76 W/kg

**SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.272 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 2.49 W/kg

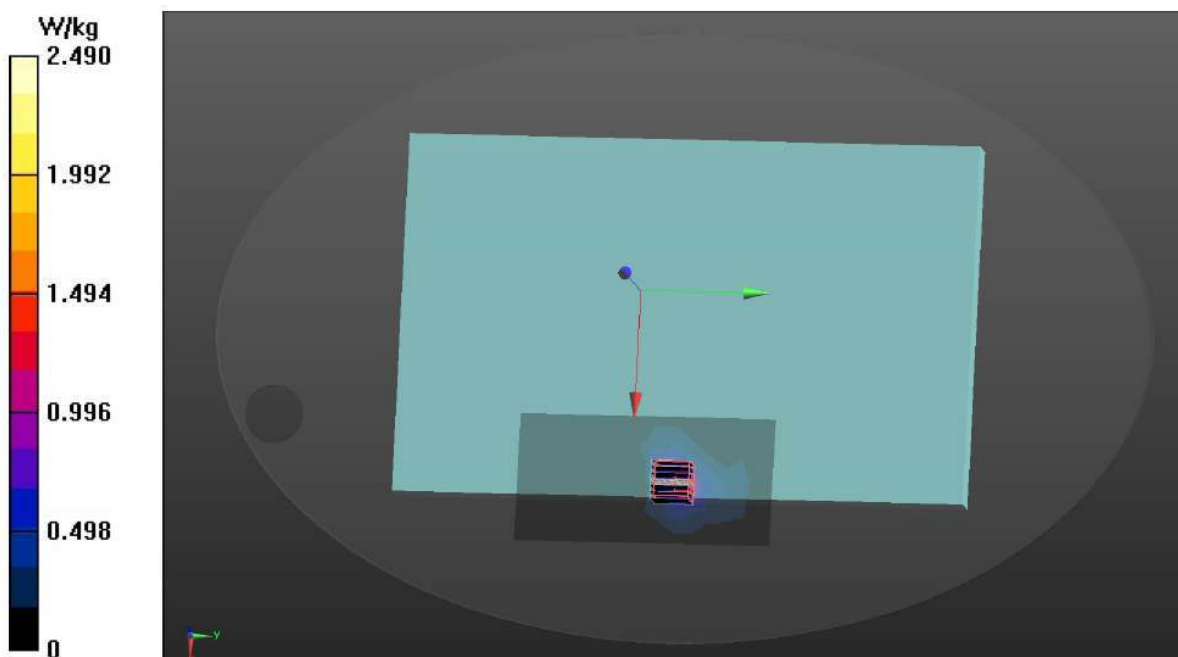



Date: 8/11/2021

Test Laboratory: Audix\_SAR Lab

**P21 802.11a CH116 5580MHz ant2 Screen****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.9$  S/m;  $\epsilon_r = 35.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.83, 4.83, 4.83) @ 5580 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.72 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8233 V/m; Power Drift = -1.23 dB


Peak SAR (extrapolated) = 3.58 W/kg

**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.335 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 1.89 W/kg

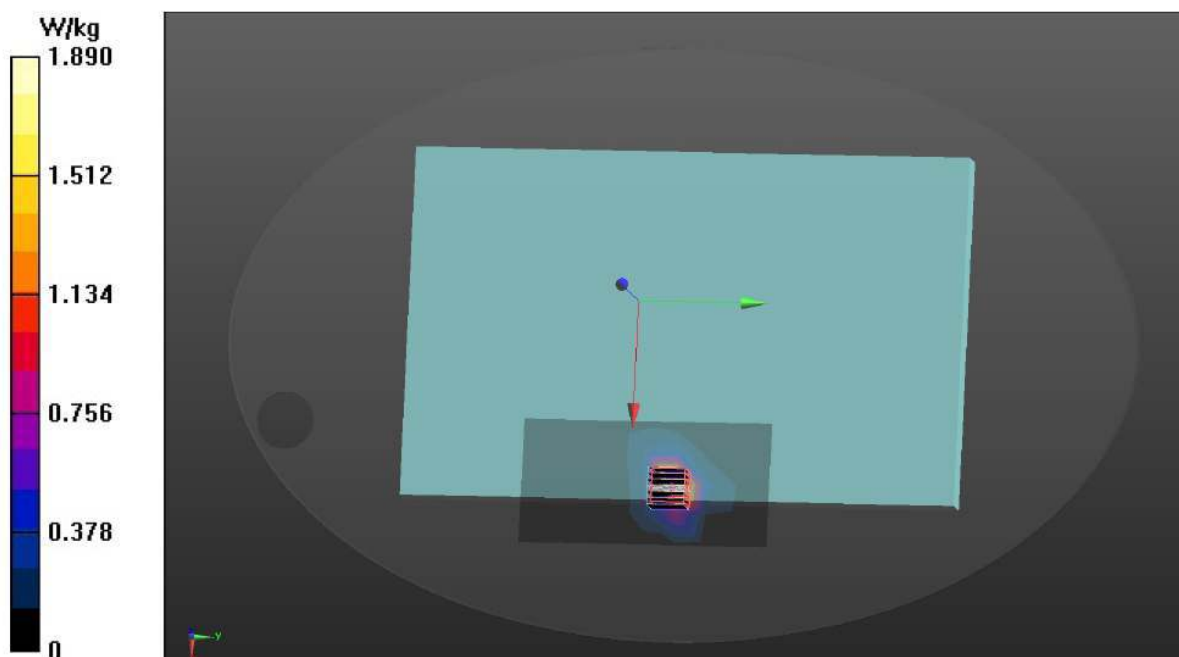

Date: 8/12/2021

Test Laboratory: Audix\_SAR Lab

**P25 802.11a CH149 5745MHz ant1 Screen****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.032$  S/m;  $\epsilon_r = 36.126$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5745 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.78 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.8922 V/m; Power Drift = 1.23 dB


Peak SAR (extrapolated) = 9.15 W/kg

**SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.179 W/kg**

Smallest distance from peaks to all points 3 dB below = 2.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 2.42 W/kg

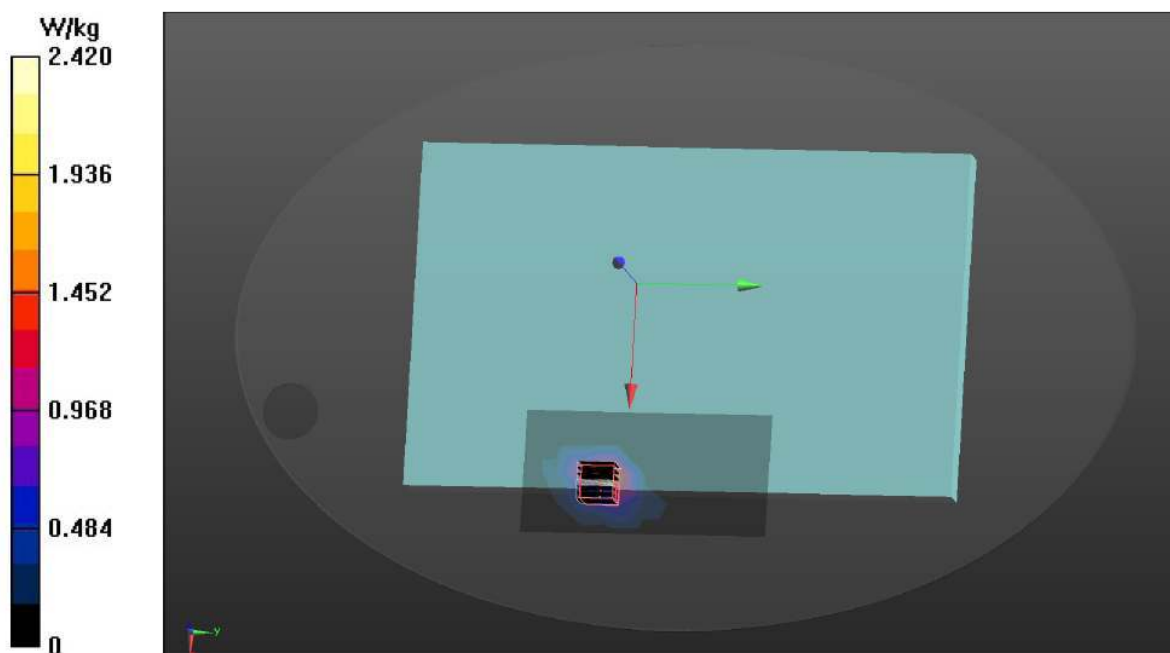

Date: 8/12/2021

Test Laboratory: Audix\_SAR Lab

**P26 802.11a CH149 5745MHz ant2 Screen****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.032$  S/m;  $\epsilon_r = 36.126$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5745 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.29 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 1.545 V/m; Power Drift = 0.22 dB


Peak SAR (extrapolated) = 4.16 W/kg

**SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.239 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 2.37 W/kg

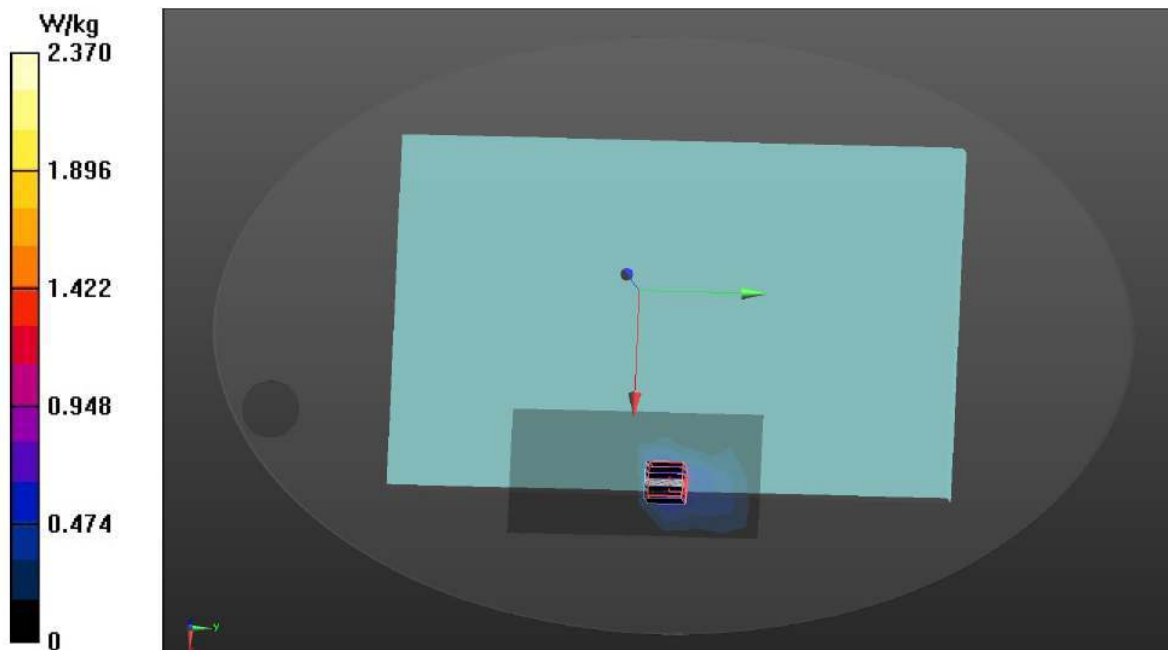

Date: 8/12/2021

Test Laboratory: Audix\_SAR Lab

**P22 802.11a CH157 5785MHz ant1 Screen****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.028$  S/m;  $\epsilon_r = 35.731$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5785 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 2.08 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.7982 V/m; Power Drift = -0.48 dB


Peak SAR (extrapolated) = 8.18 W/kg

**SAR(1 g) = 0.998 W/kg; SAR(10 g) = 0.384 W/kg**

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 2.48 W/kg

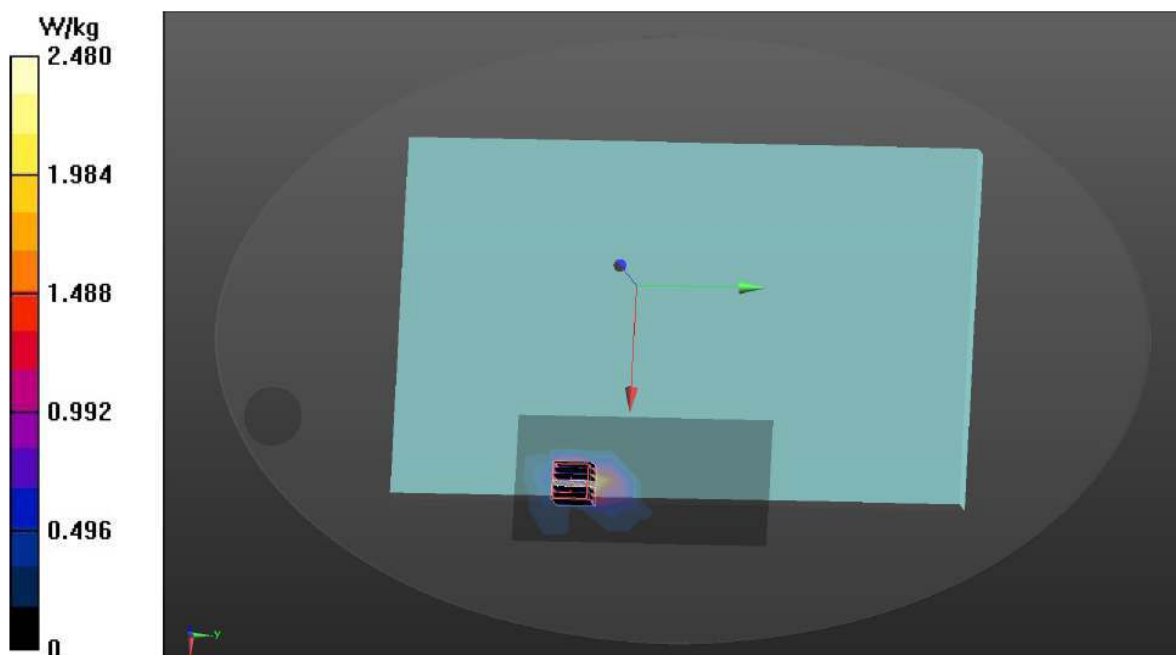



Date: 8/12/2021

Test Laboratory: Audix\_SAR Lab

**P23 802.11a CH157 5785MHz ant2 Screen****DUT: 15Z95P(INPAQ)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.028$  S/m;  $\epsilon_r = 35.731$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5785 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.69 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6225 V/m; Power Drift = -0.47 dB


Peak SAR (extrapolated) = 3.88 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.319 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 2.03 W/kg

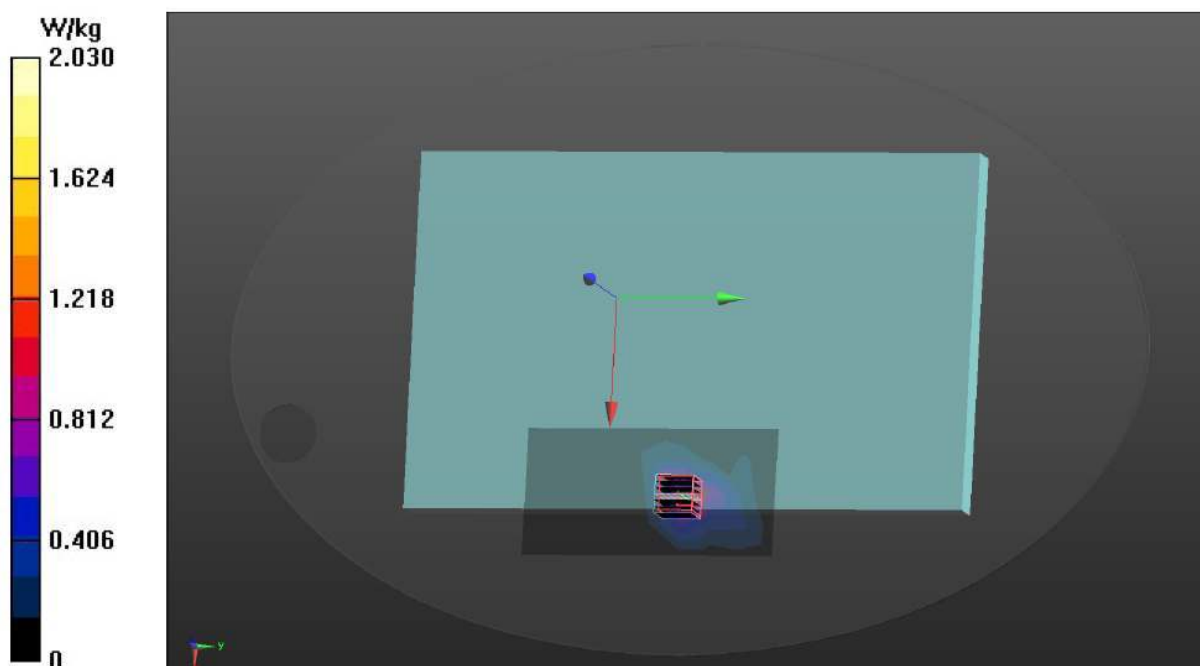

Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)

Date: 8/9/2021

Test Laboratory: Audix\_SAR Lab

**P21 802.11a CH52 5260MHz ant1 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.597$  S/m;  $\epsilon_r = 36.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.15, 5.15, 5.15) @ 5260 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 2.08 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.7881 V/m; Power Drift = 1.75 dB


Peak SAR (extrapolated) = 3.53 W/kg

**SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.281 W/kg**

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 2.49 W/kg

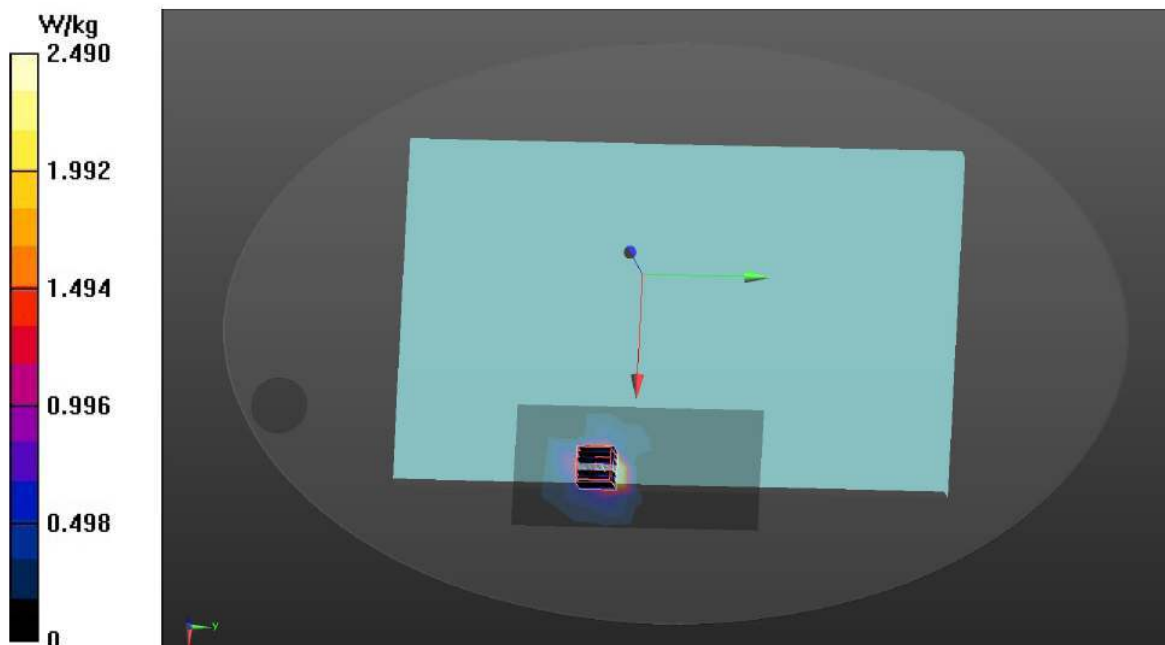

Date: 8/9/2021

Test Laboratory: Audix\_SAR Lab

**P22 802.11a CH52 5260MHz ant2 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.597$  S/m;  $\epsilon_r = 36.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.15, 5.15, 5.15) @ 5260 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.84 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.8455 V/m; Power Drift = 0.95 dB


Peak SAR (extrapolated) = 5.84 W/kg

**SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.302 W/kg**

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 2.64 W/kg

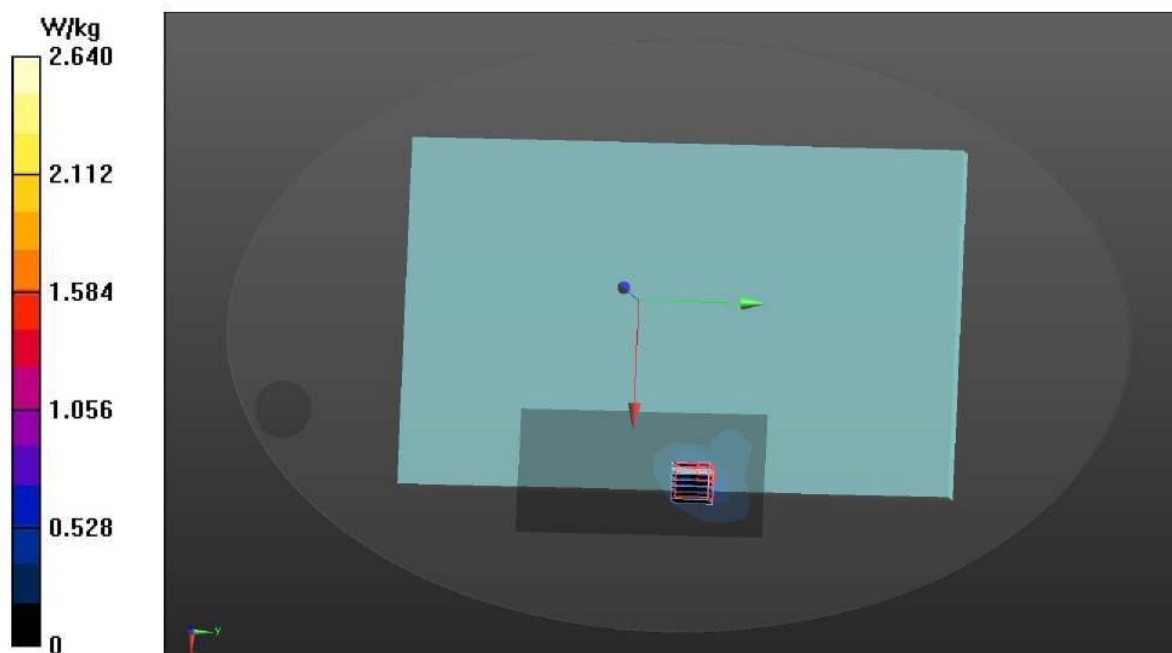

Date: 8/11/2021

Test Laboratory: Audix\_SAR Lab

**P23 802.11a CH116 5580MHz ant1 Screen****DUT: 15Z95P(LUXSHARE)**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.9$  S/m;  $\epsilon_r = 35.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.83, 4.83, 4.83) @ 5580 MHz; Calibrated: 9/23/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (9x17x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.64 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.8830 V/m; Power Drift = -0.74 dB

Peak SAR (extrapolated) = 5.15 W/kg

**SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.309 W/kg**

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 2.25 W/kg

