


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	148
A.2.3 Emissions in Non-restricted Frequency Bands.....	163
A.3 26dB/6dB BANDWIDTH	164
A.3.1 26dB/6dB Bandwidth Result	164
A.3.2 Measurement Plots	169
A.4 MAXIMUM OUTPUT POWER	189
A.4.1 Average Output Power	189
A.4.2 Measurement Plots	194
A.5 POWER SPECTRAL DENSITY	202
A.5.1 Power Spectral Density Result	202
A.5.2 Measurement Plots	206
A.6 FREQUENCY STABILITY	225
A.6.1 Frequency stability Result	225

A.1 CONDUCTED EMISSION

Test Date	2021/08/08	Temp./Hum.	27°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

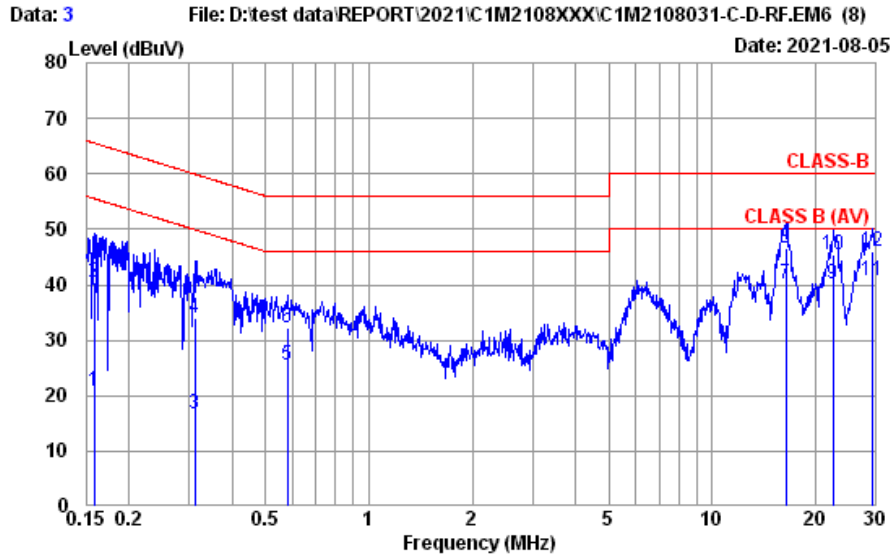

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: ENH432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 27°C / 50%	Engineer	: Roy Hung
EUT Model	: 15Z95P	Test Rating	: 120Vac/60Hz
Test Mode	: Operating INPAQ		


	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.158	10.41	0.03	9.85	0.55	20.84	55.56	34.72	Average
2	0.158	10.41	0.03	9.85	20.24	40.53	65.56	25.03	QP
3	0.312	10.38	0.03	9.85	-3.55	16.71	49.93	33.22	Average
4	0.312	10.38	0.03	9.85	13.82	34.08	59.93	25.85	QP
5	0.579	10.37	0.03	9.85	5.15	25.40	46.00	20.60	Average
6	0.579	10.37	0.03	9.85	12.09	32.34	56.00	23.66	QP
7	16.398	10.98	0.18	9.92	19.08	40.16	50.00	9.84	Average
8	16.398	10.98	0.18	9.92	25.38	46.46	60.00	13.54	QP
9	22.416	11.18	0.21	9.95	18.77	40.11	50.00	9.89	Average
10	22.416	11.18	0.21	9.95	24.01	45.35	60.00	14.65	QP
11	29.371	11.36	0.24	10.00	19.14	40.74	50.00	9.26	Average
12	29.371	11.36	0.24	10.00	24.54	46.14	60.00	13.86	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2021/08/08	Temp./Hum.	27°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

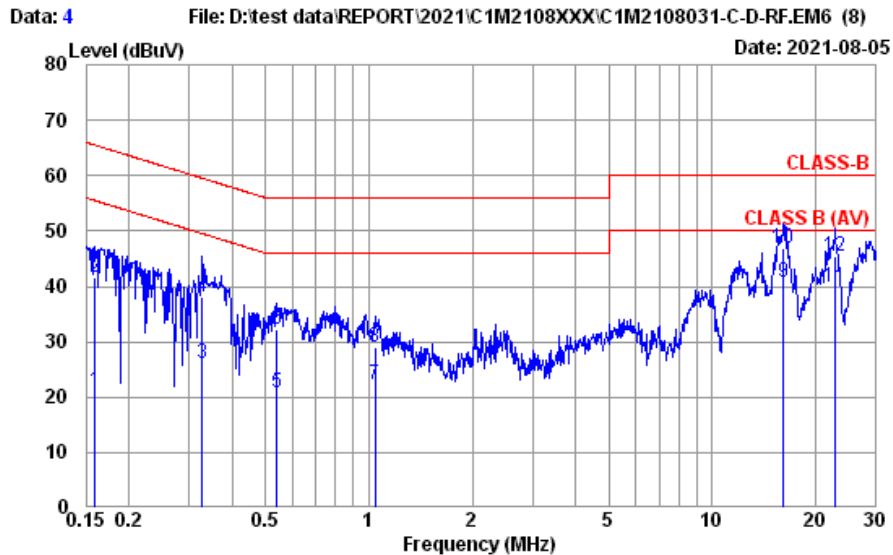


Site No. : No.8 Shielded Room Data No. : 4
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 27°C / 50% Engineer : Roy Hung
 EUT Model : 15Z95P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.159	10.40	0.03	9.85	0.85	21.13	55.52	34.39	Average
2	0.159	10.40	0.03	9.85	21.28	41.56	65.52	23.96	QP
3	0.327	10.38	0.03	9.85	5.90	26.16	49.53	23.37	Average
4	0.327	10.38	0.03	9.85	17.82	38.08	59.53	21.45	QP
5	0.541	10.37	0.03	9.85	0.52	20.77	46.00	25.23	Average
6	0.541	10.37	0.03	9.85	11.84	32.09	56.00	23.91	QP
7	1.043	10.38	0.04	9.85	1.93	22.20	46.00	23.80	Average
8	1.043	10.38	0.04	9.85	8.80	29.07	56.00	26.93	QP
9	16.140	10.71	0.18	9.92	20.05	40.86	50.00	9.14	Average
10	16.140	10.71	0.18	9.92	26.14	46.95	60.00	13.05	QP
11	22.775	10.80	0.21	9.96	18.96	39.93	50.00	10.07	Average
12	22.775	10.80	0.21	9.96	24.55	45.52	60.00	14.48	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/08/08	Temp./Hum.	27°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

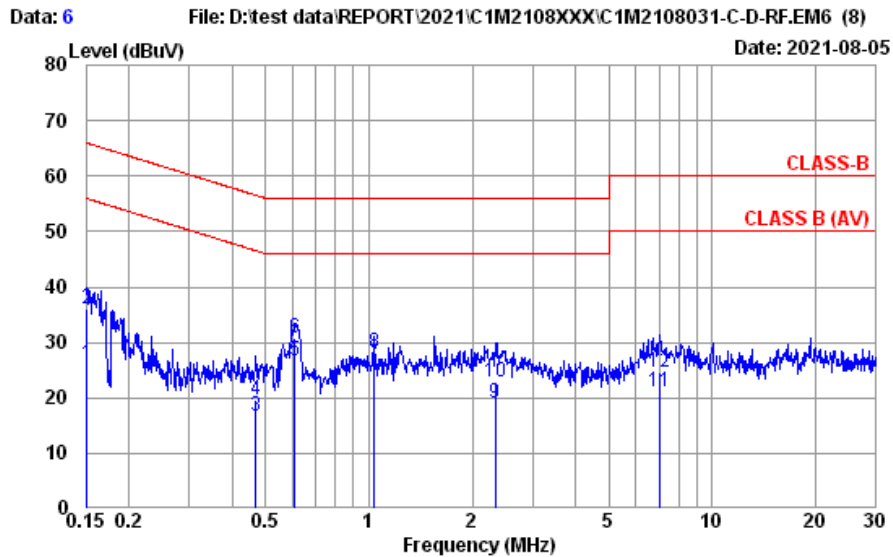


Site No. : No.8 Shielded Room Data No. : 6
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : NEUTRAL
 Environment : 27°C / 50% Engineer : Roy Hung
 EUT Model : 15Z95P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 LUXSHARE

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.41	0.03	9.85	5.74	26.03	55.96	29.93	Average
2	0.151	10.41	0.03	9.85	15.85	36.14	65.96	29.82	QP
3	0.469	10.37	0.03	9.85	-3.66	16.59	46.54	29.95	Average
4	0.469	10.37	0.03	9.85	-0.49	19.76	56.54	36.78	QP
5	0.608	10.37	0.03	9.85	6.43	26.68	46.00	19.32	Average
6	0.608	10.37	0.03	9.85	10.61	30.86	56.00	25.14	QP
7	1.037	10.38	0.04	9.85	5.87	26.14	46.00	19.86	Average
8	1.037	10.38	0.04	9.85	7.98	28.25	56.00	27.75	QP
9	2.334	10.42	0.07	9.86	-1.43	18.92	46.00	27.08	Average
10	2.334	10.42	0.07	9.86	2.42	22.77	56.00	33.23	QP
11	7.025	10.59	0.12	9.87	0.64	21.22	50.00	28.78	Average
12	7.025	10.59	0.12	9.87	3.98	24.56	60.00	35.44	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/08/08	Temp./Hum.	27°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

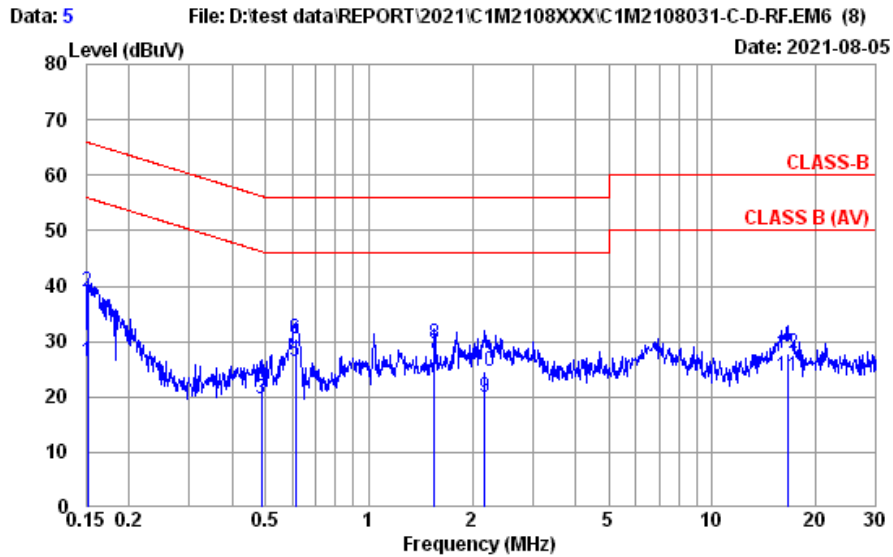

Site No. : No.8 Shielded Room Data No. : 5
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LIIE
 Environment : 27°C / 50% Engineer : Roy Hung
 EUT Model : 15295P Test Rating : 120Vac/60Hz
 Test Mode : Operating
 LUXSHARE

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.40	0.03	9.85	6.05	26.33	55.91	29.58	Average
2	0.152	10.40	0.03	9.85	18.63	38.91	65.91	27.00	QP
3	0.486	10.37	0.03	9.85	-0.74	19.51	46.23	26.72	Average
4	0.486	10.37	0.03	9.85	2.36	22.61	56.23	33.62	QP
5	0.611	10.37	0.03	9.85	6.09	26.34	46.00	19.66	Average
6	0.611	10.37	0.03	9.85	10.11	30.36	56.00	25.64	QP
7	1.552	10.39	0.05	9.86	7.51	27.81	46.00	18.19	Average
8	1.552	10.39	0.05	9.86	9.35	29.65	56.00	26.35	QP
9	2.178	10.40	0.06	9.86	-0.49	19.83	46.00	26.17	Average
10	2.178	10.40	0.06	9.86	4.18	24.50	56.00	31.50	QP
11	16.661	10.71	0.18	9.92	3.01	23.82	50.00	26.18	Average
12	16.661	10.71	0.18	9.92	7.17	27.98	60.00	32.02	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2021/08/10 ~ 13	Temp./Hum.	25 ~ 27°C/53 ~ 62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #1 (with INPAQ Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	21.46	0.48	28.37	32.16	25.73	40.00	14.27	Peak
161.920	15.52	1.11	27.86	39.42	28.19	43.50	15.31	Peak
299.660	18.87	1.58	27.50	36.22	29.17	46.00	16.83	Peak
437.400	21.86	1.97	28.44	30.73	26.12	46.00	19.88	Peak
745.860	25.00	2.70	28.79	31.89	30.80	46.00	15.20	Peak
995.150	26.98	3.28	28.13	29.12	31.25	54.00	22.75	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.820	20.89	0.49	28.37	43.90	36.91	40.00	3.09	Peak
123.120	17.67	0.95	28.03	38.94	29.53	43.50	13.97	Peak
250.190	18.03	1.42	27.60	37.13	28.98	46.00	17.02	Peak
540.220	23.39	2.23	28.85	30.73	27.50	46.00	18.50	Peak
841.890	25.78	2.91	28.55	30.30	30.44	46.00	15.56	Peak
986.420	26.90	3.26	28.15	28.82	30.83	54.00	23.17	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

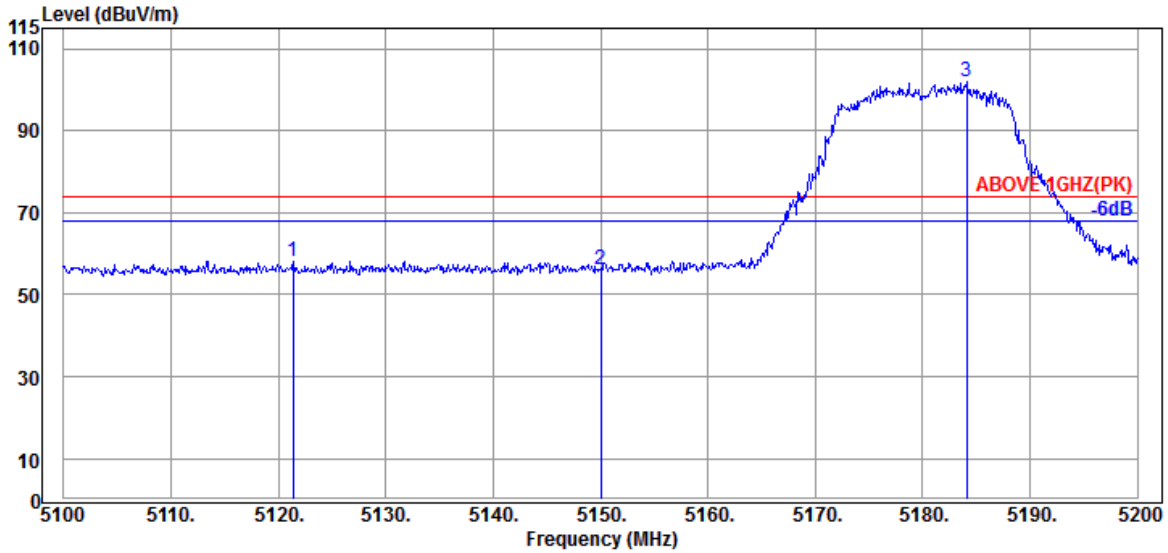

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.400	34.13	10.70	34.36	47.78	58.25	74.00	15.75	Peak
5150.000	34.20	10.70	34.35	45.49	56.04	74.00	17.96	Peak
@ 5184.100	34.20	10.72	34.34	91.28	101.86	---	---	Peak

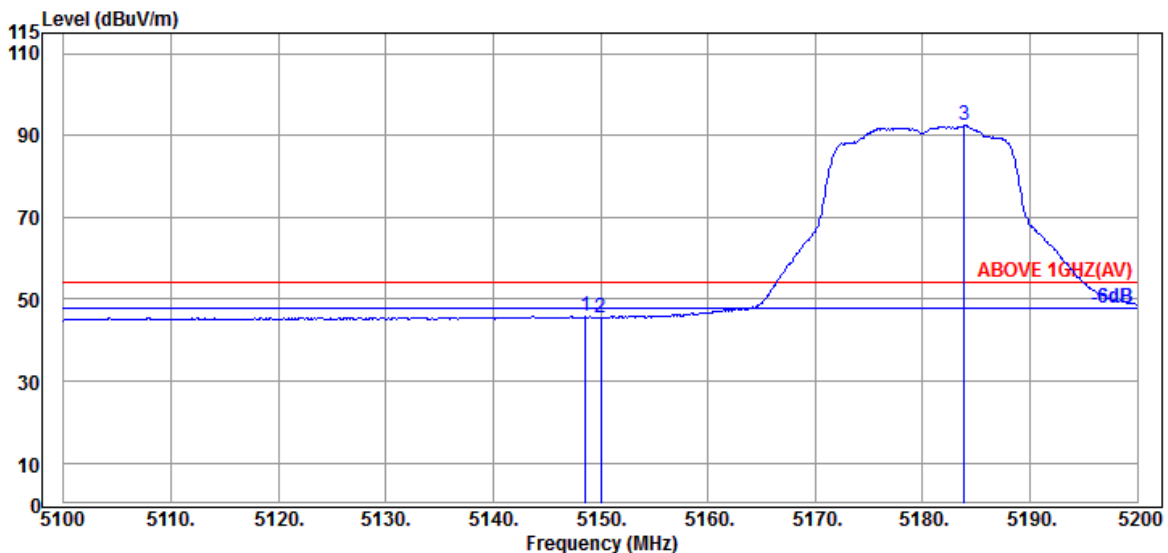


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.20	10.70	34.35	35.17	45.72	54.00	8.28	Average
5150.000	34.20	10.70	34.35	35.03	45.58	54.00	8.42	Average
@ 5183.900	34.20	10.72	34.34	81.93	92.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

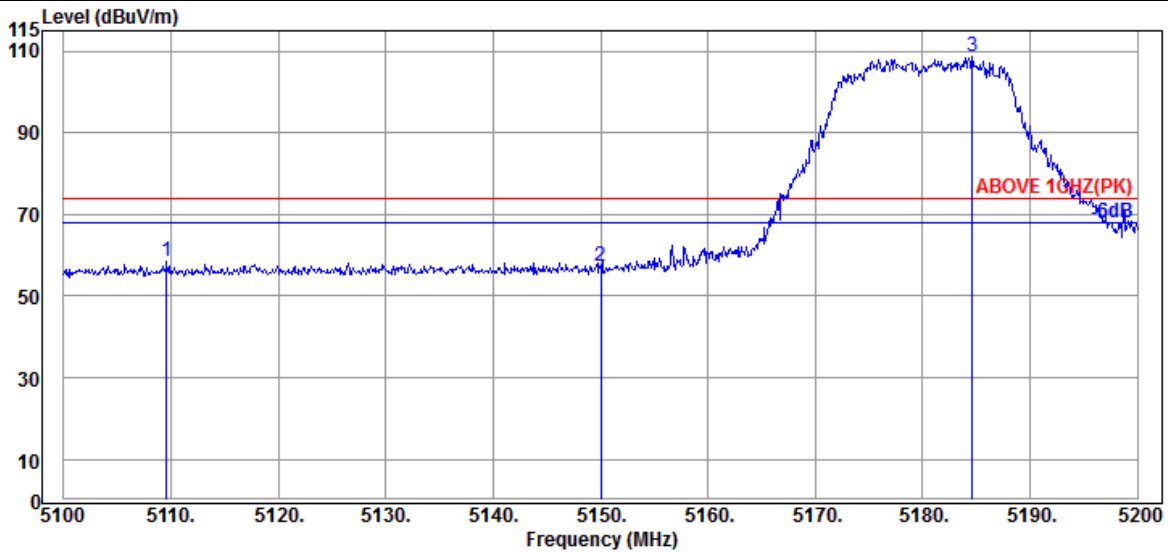

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.600	34.10	10.68	34.36	48.06	58.48	74.00	15.52	Peak
5150.000	34.20	10.70	34.35	46.79	57.34	74.00	16.66	Peak
@ 5184.600	34.20	10.72	34.34	97.96	108.54	---	---	Peak

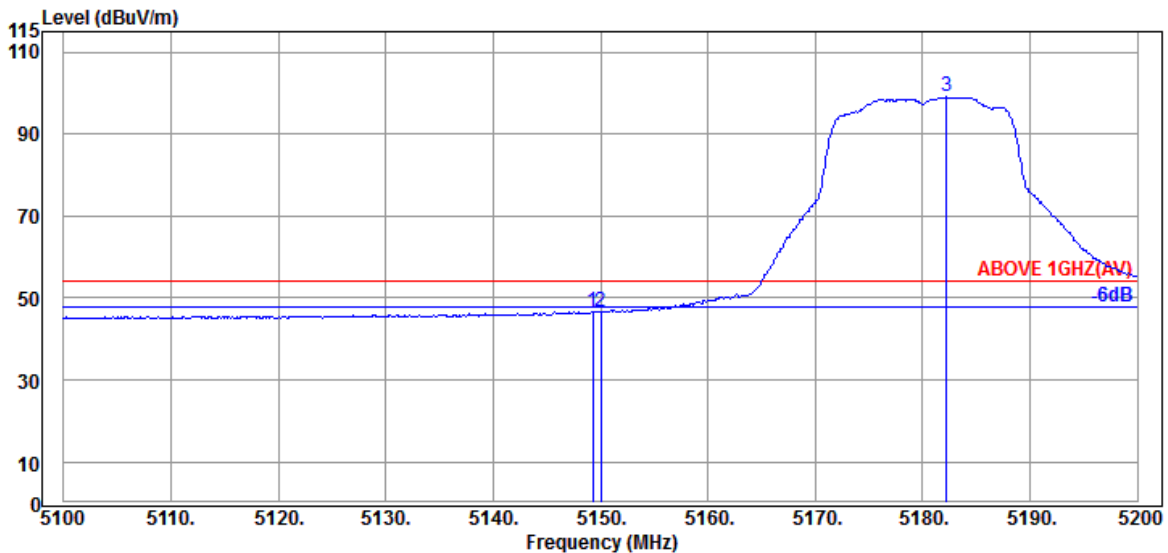


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.20	10.70	34.35	36.22	46.77	54.00	7.23	Average
5150.000	34.20	10.70	34.35	35.99	46.54	54.00	7.46	Average
@ 5182.200	34.20	10.72	34.34	88.45	99.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

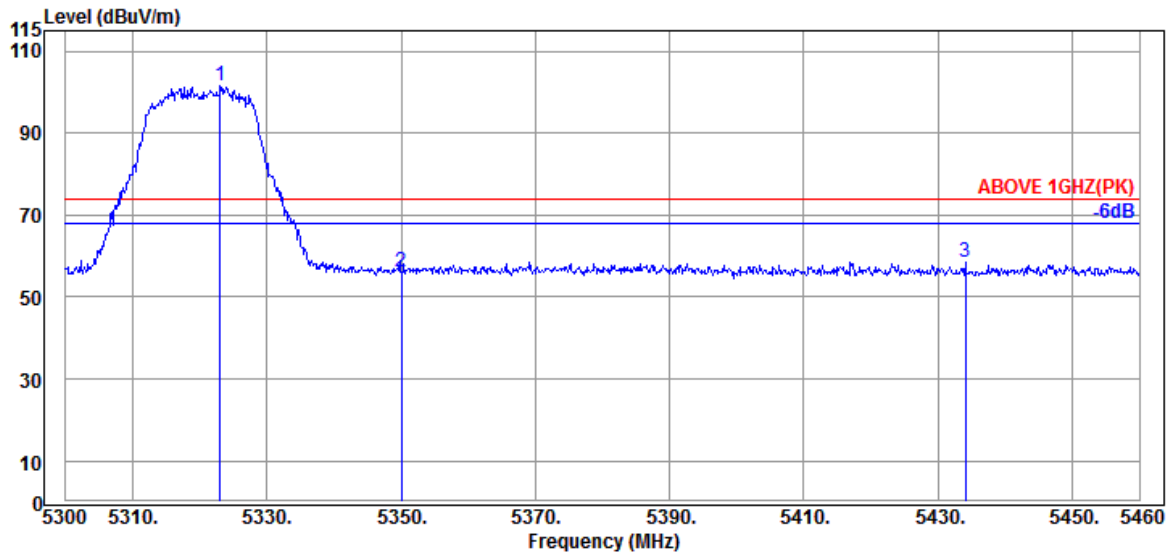

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.040	34.53	10.83	34.28	90.57	101.65	---	---	Peak
5350.080	34.60	10.83	34.27	45.03	56.19	74.00	17.81	Peak
5434.080	34.55	10.89	34.25	47.48	58.67	74.00	15.33	Peak

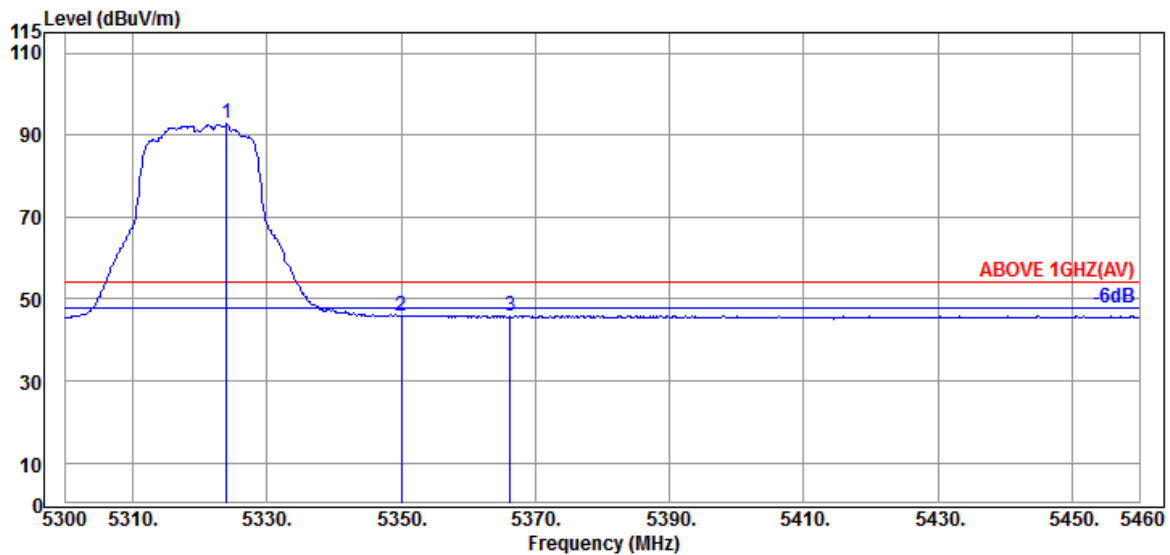


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	34.57	10.83	34.28	81.59	92.71	---	---	Average
5350.080	34.60	10.83	34.27	34.59	45.75	54.00	8.25	Average
5366.240	34.63	10.85	34.27	34.79	46.00	54.00	8.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

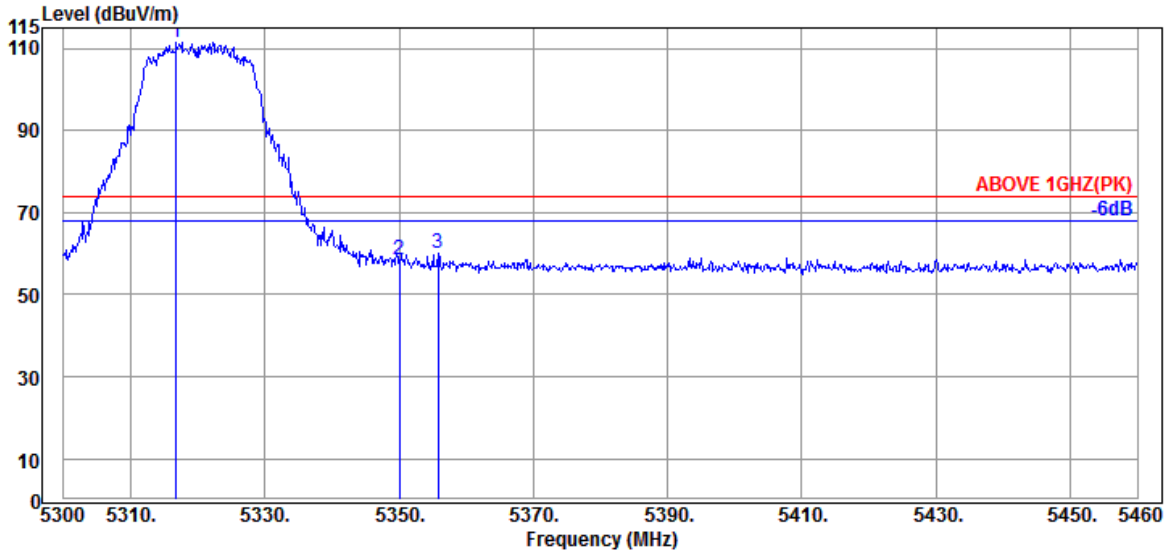

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.53	10.81	34.29	100.22	111.27	---	---	Peak
5350.080	34.60	10.83	34.27	47.30	58.46	74.00	15.54	Peak
5355.840	34.63	10.85	34.27	48.95	60.16	74.00	13.84	Peak

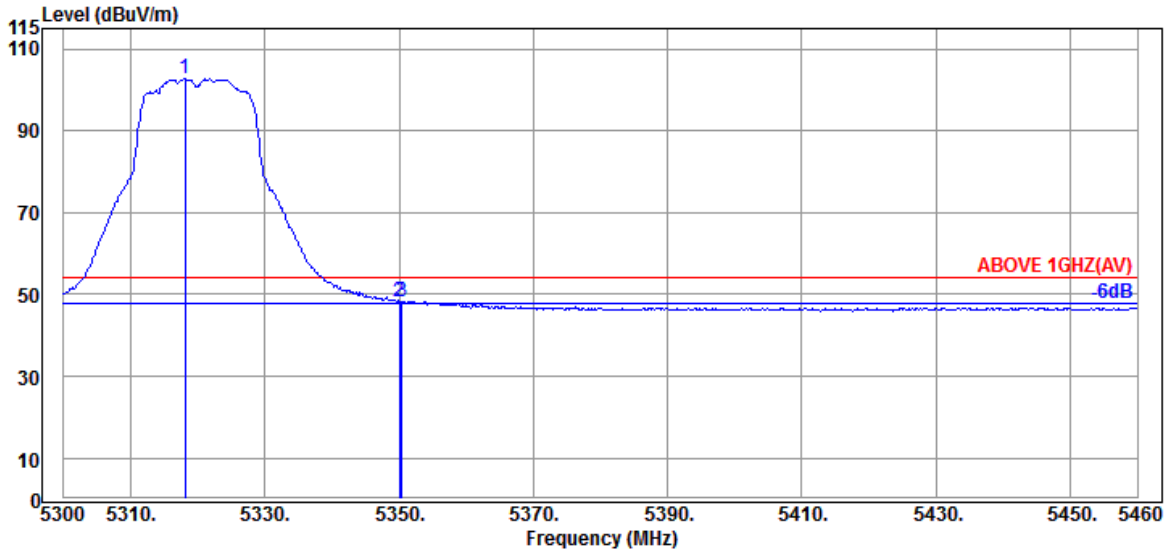


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.080	34.53	10.81	34.29	91.71	102.76	---	---	Average
5350.080	34.60	10.83	34.27	37.18	48.34	54.00	5.66	Average
5350.400	34.60	10.83	34.27	37.21	48.37	54.00	5.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

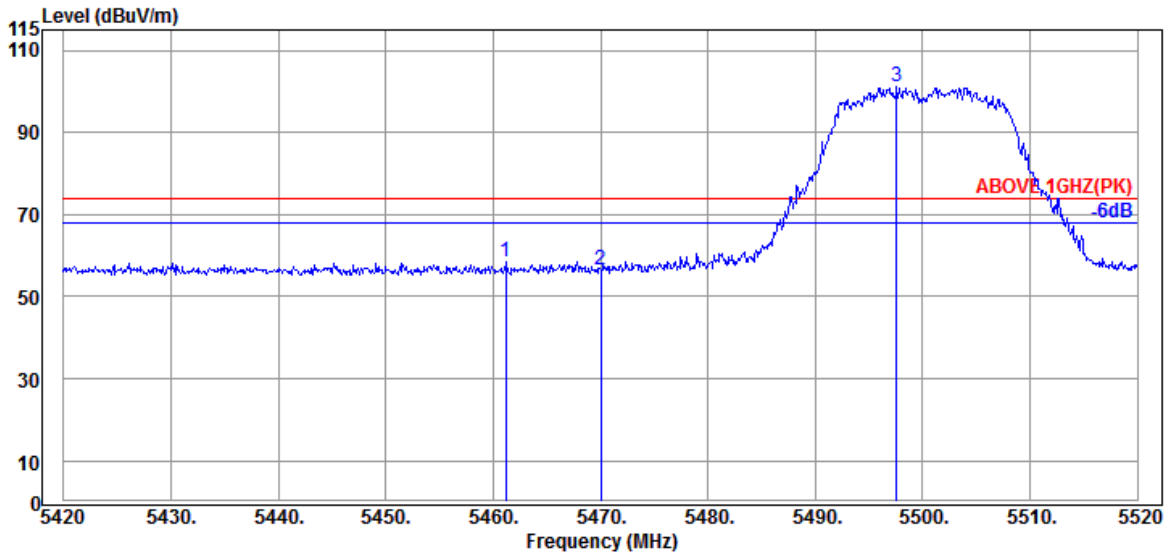

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.50	10.91	34.24	47.41	58.58	74.00	15.42	Peak
5470.000	34.47	10.91	34.24	45.28	56.42	74.00	17.58	Peak
@ 5497.600	34.40	10.93	34.23	90.15	101.25	---	---	Peak

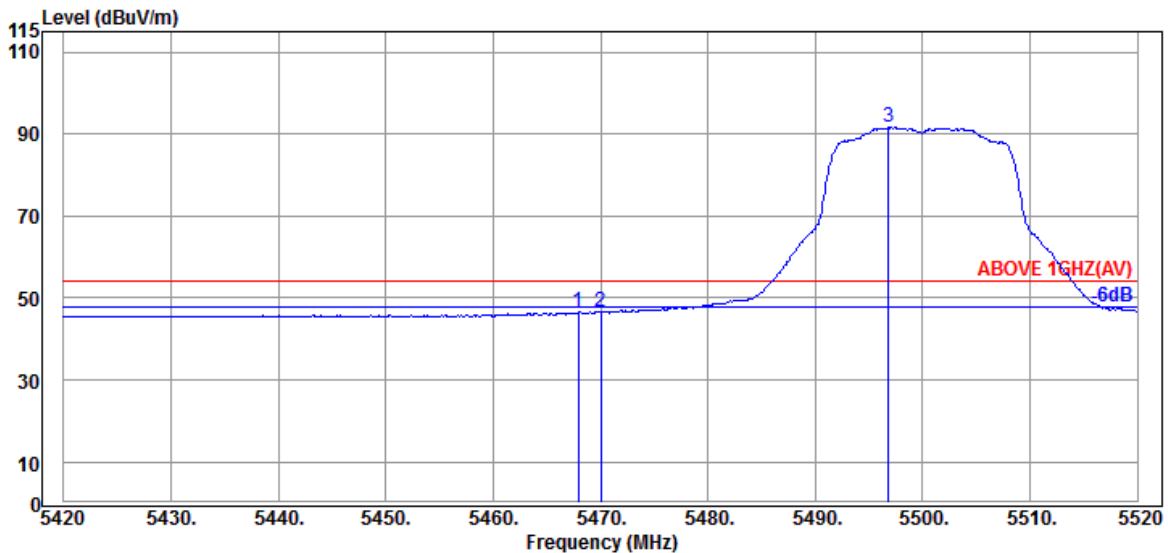


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.47	10.91	34.24	35.52	46.66	54.00	7.34	Average
5470.000	34.47	10.91	34.24	35.41	46.55	54.00	7.45	Average
@ 5496.800	34.40	10.93	34.23	80.51	91.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

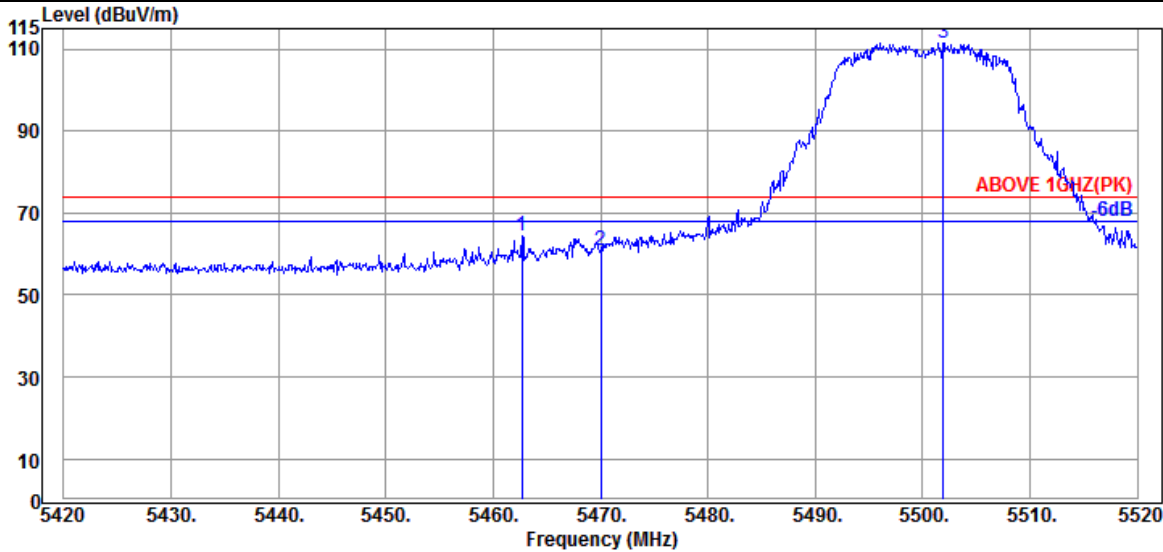

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.700	34.50	10.91	34.24	53.16	64.33	74.00	9.67	Peak
5470.000	34.47	10.91	34.24	49.88	61.02	74.00	12.98	Peak
@ 5501.900	34.40	10.93	34.24	100.40	111.49	---	---	Peak

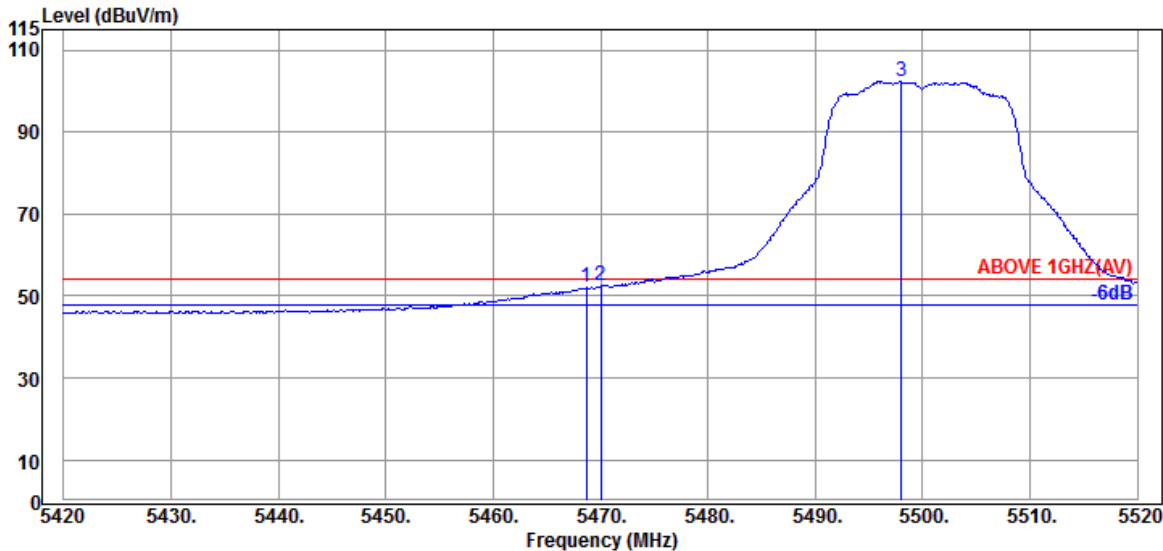


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.47	10.91	34.24	40.83	51.97	54.00	2.03	Average
5470.000	34.47	10.91	34.24	41.27	52.41	54.00	1.59	Average
@ 5498.000	34.40	10.93	34.23	91.28	102.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

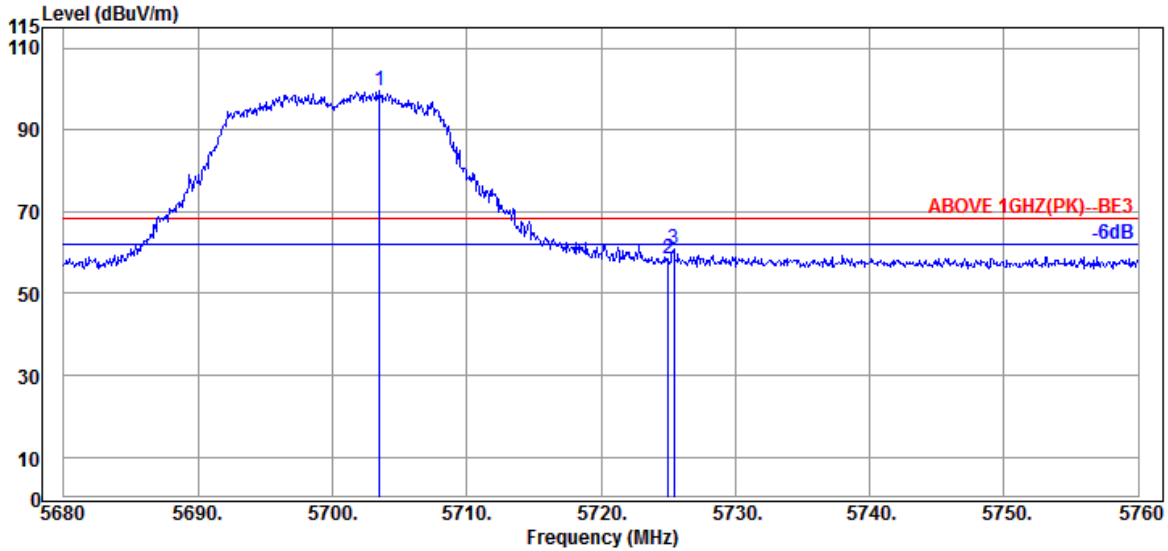

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.520	34.40	11.03	34.31	88.59	99.71	---	---	Peak
5725.040	34.67	11.05	34.32	47.02	58.42	68.20	9.78	Peak
5725.440	34.67	11.05	34.32	49.27	60.67	68.20	7.53	Peak

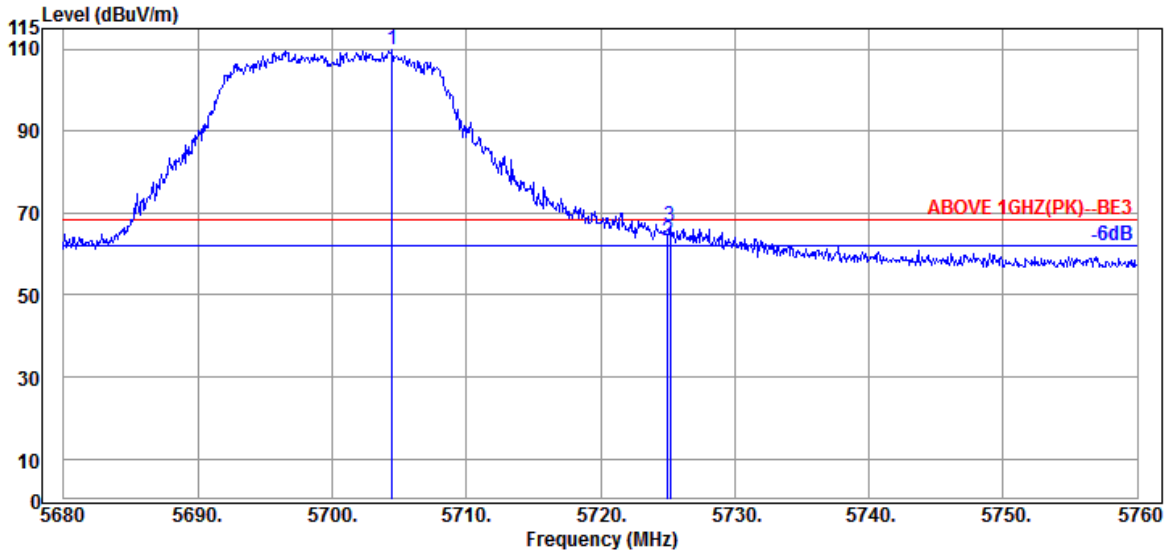


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.480	34.40	11.03	34.31	98.81	109.93	---	---	Peak
5725.040	34.67	11.05	34.32	51.82	63.22	68.20	4.98	Peak
5725.200	34.67	11.05	34.32	55.36	66.76	68.20	1.44	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

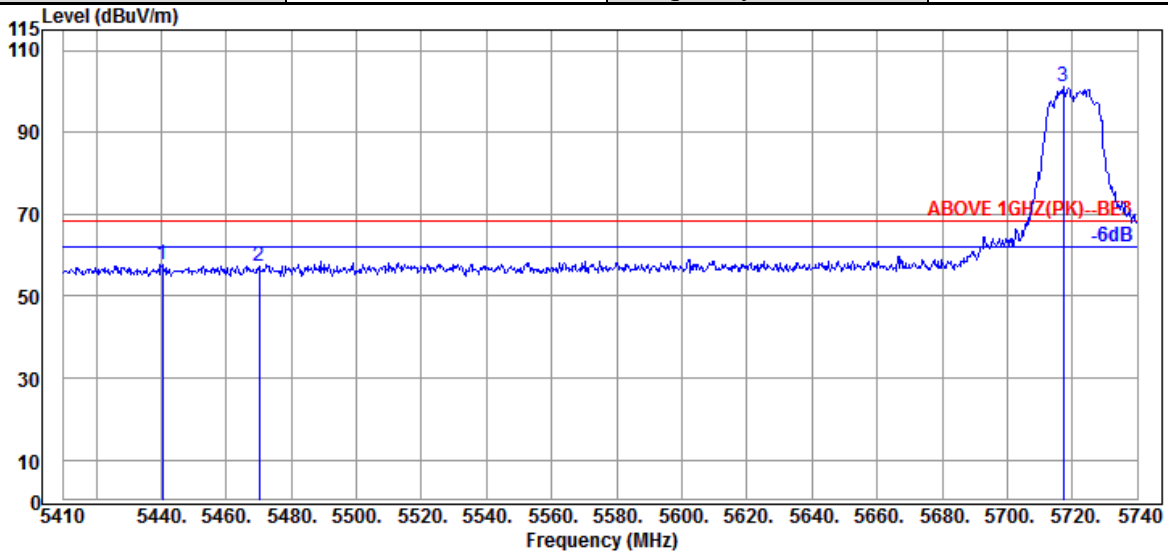

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.360	34.55	10.89	34.25	46.63	57.82	68.20	10.38	Peak
5470.060	34.47	10.91	34.24	46.02	57.16	68.20	11.04	Peak
@ 5717.230	34.53	11.05	34.32	89.74	101.00	---	---	Peak

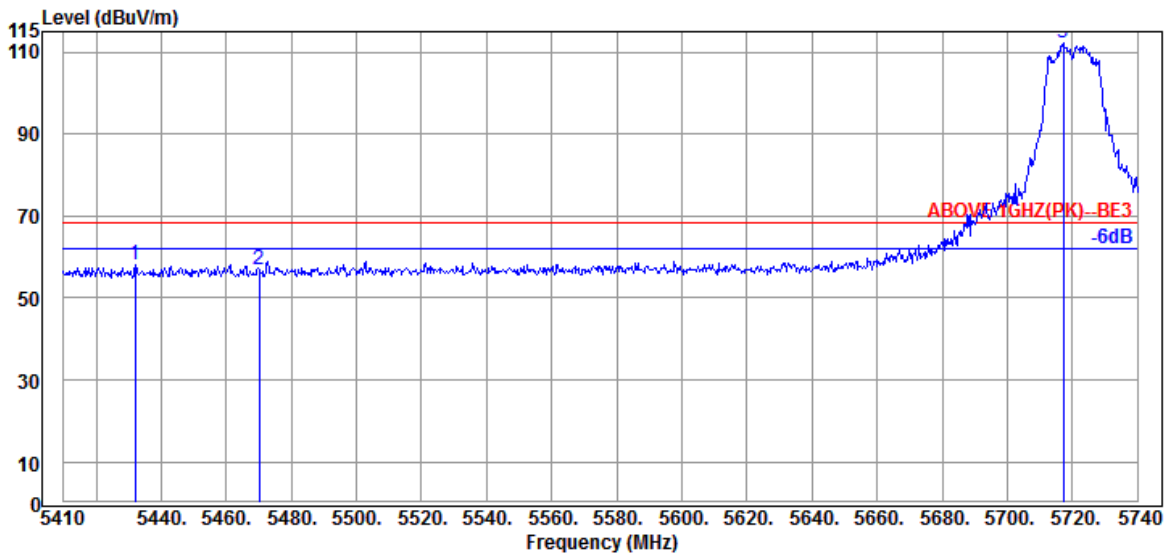


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.110	34.55	10.89	34.25	46.85	58.04	68.20	10.16	Peak
5470.060	34.47	10.91	34.24	45.93	57.07	68.20	11.13	Peak
@ 5717.230	34.53	11.05	34.32	100.79	112.05	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

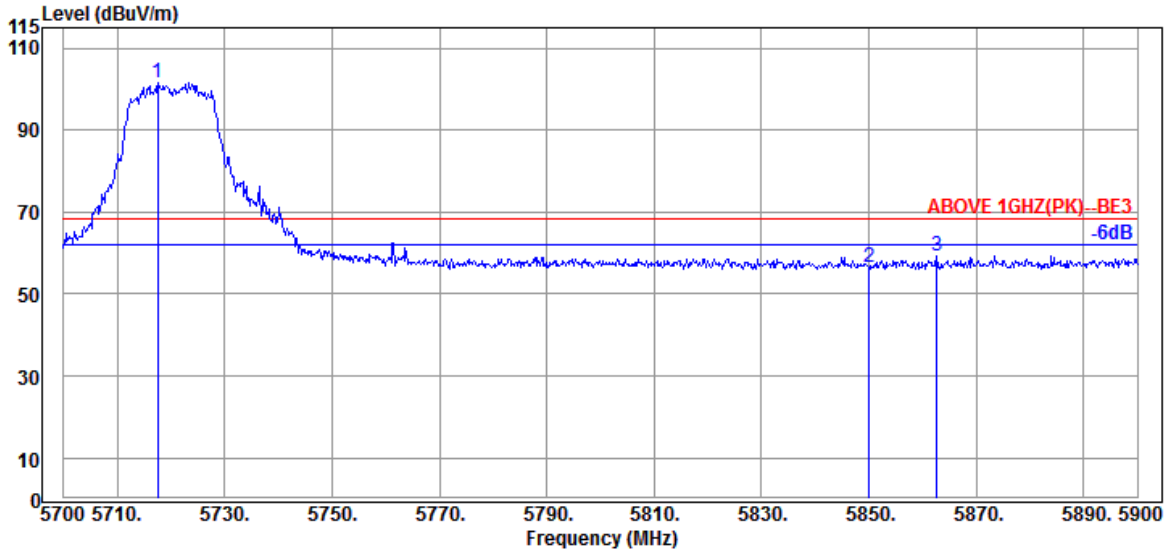

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.600	34.53	11.05	34.32	90.48	101.74	---	---	Peak
5850.000	35.10	11.10	34.38	44.59	56.41	68.20	11.79	Peak
5862.600	35.20	11.12	34.39	47.43	59.36	68.20	8.84	Peak

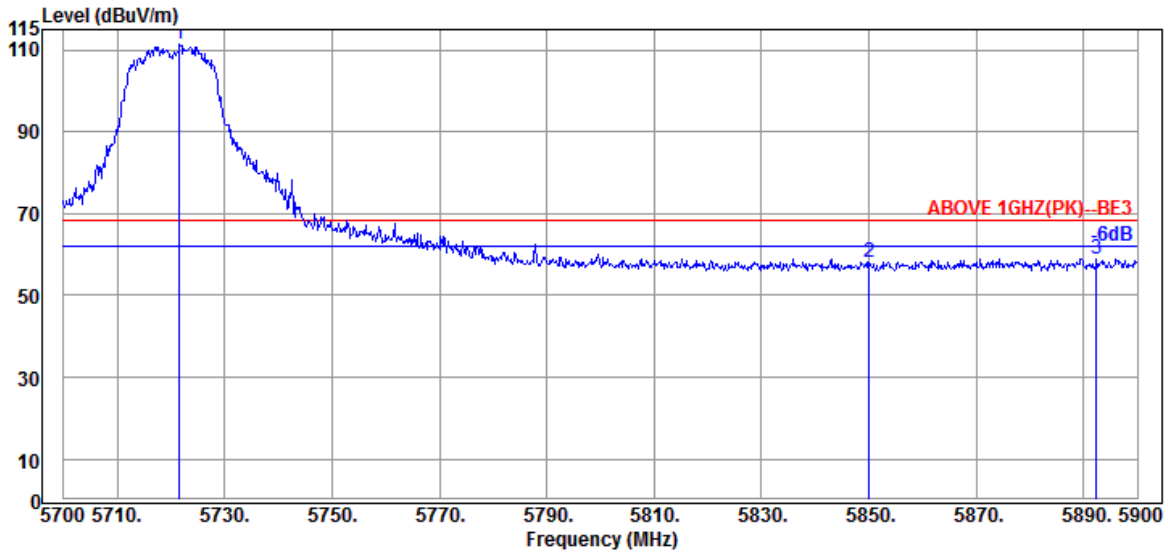


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.600	34.53	11.05	34.32	100.02	111.28	---	---	Peak
5850.000	35.10	11.10	34.38	46.25	58.07	68.20	10.13	Peak
5892.400	35.40	11.12	34.40	46.74	58.86	68.20	9.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

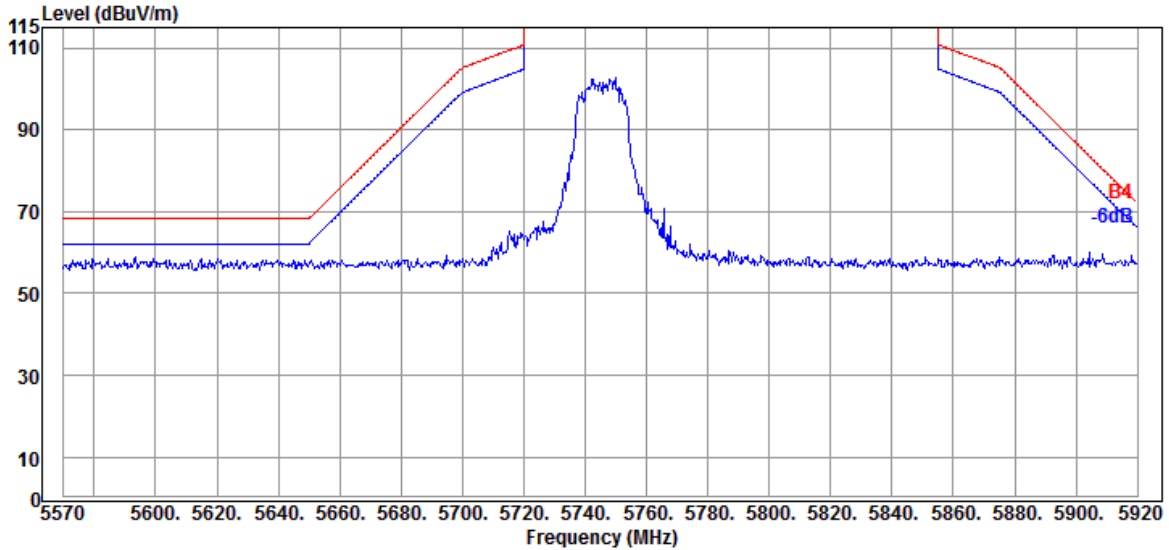


Antenna at Vertical Polarization

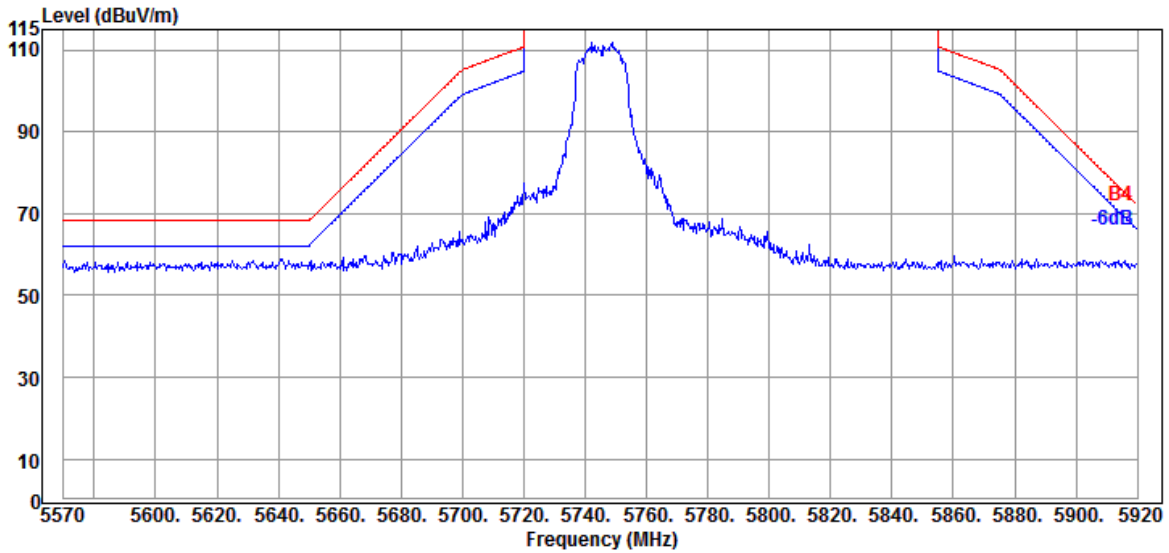


Mode	802.11a	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

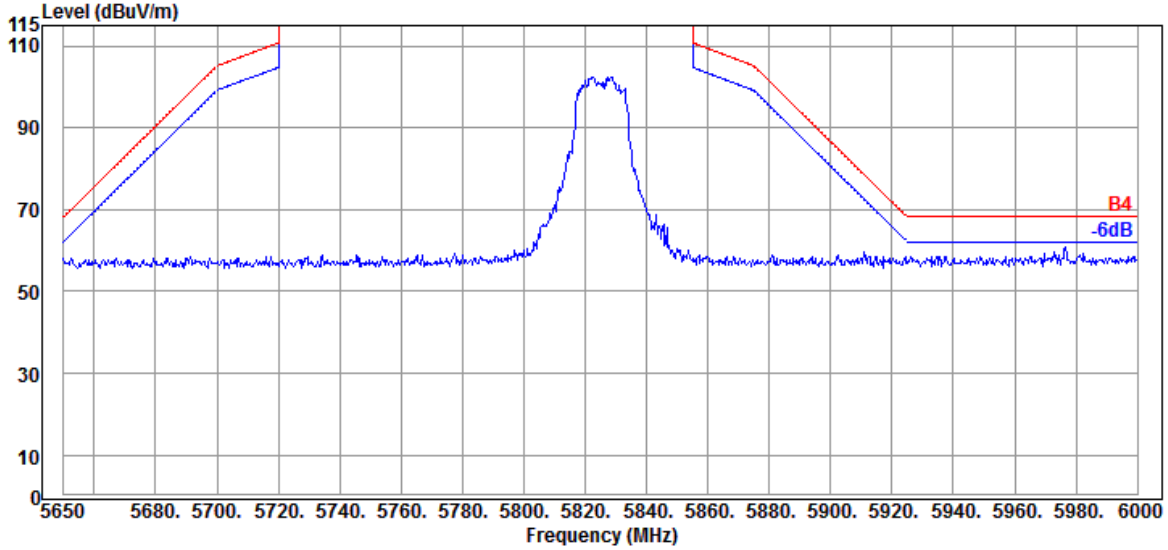

Antenna at Vertical Polarization

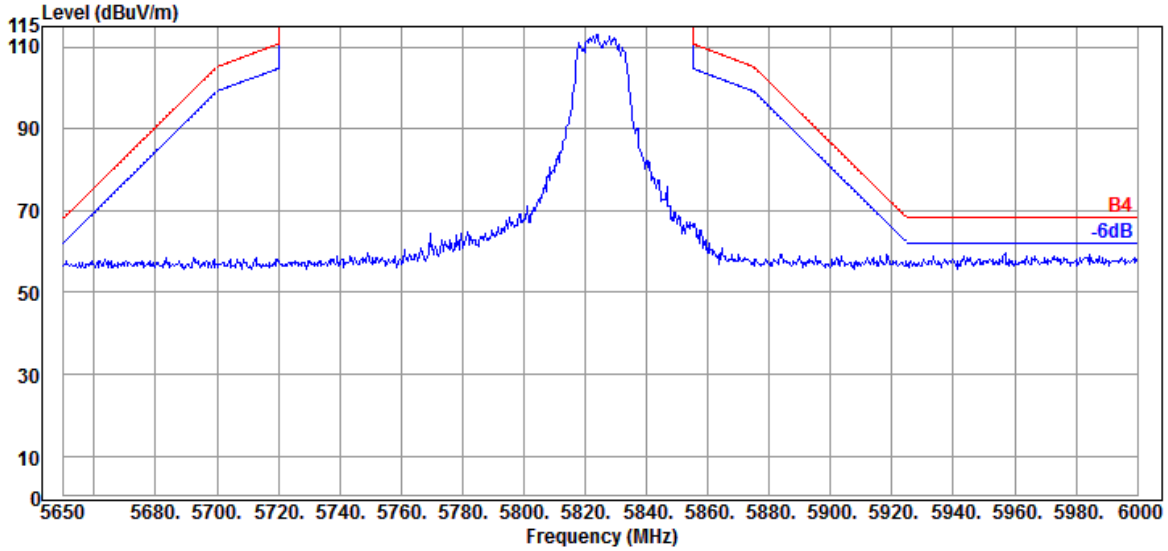


Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

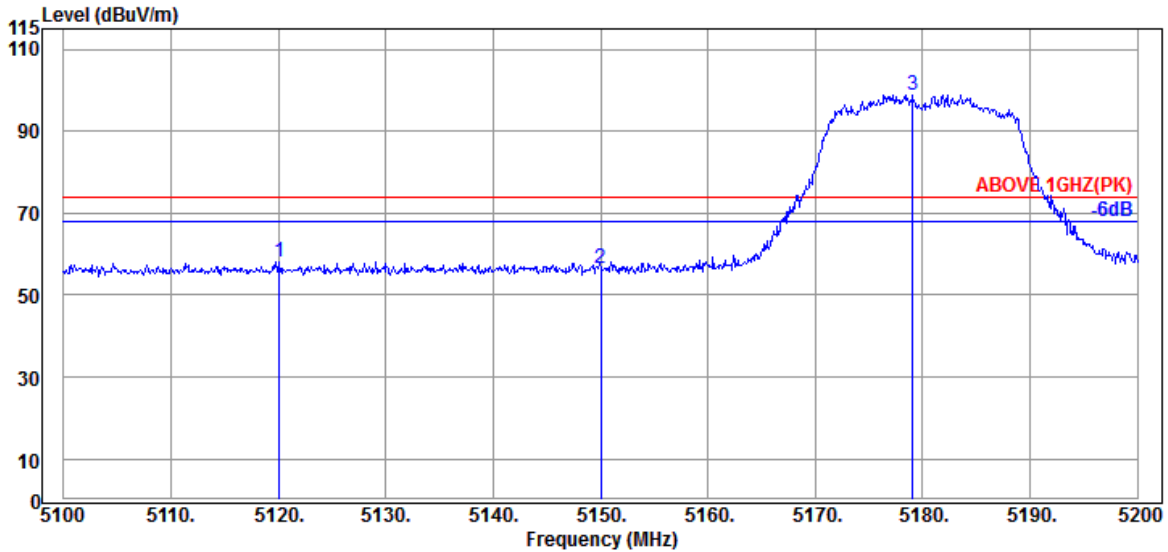

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.100	34.13	10.68	34.36	47.84	58.29	74.00	15.71	Peak
5150.000	34.20	10.70	34.35	45.89	56.44	74.00	17.56	Peak
@ 5179.100	34.20	10.72	34.34	88.40	98.98	---	---	Peak

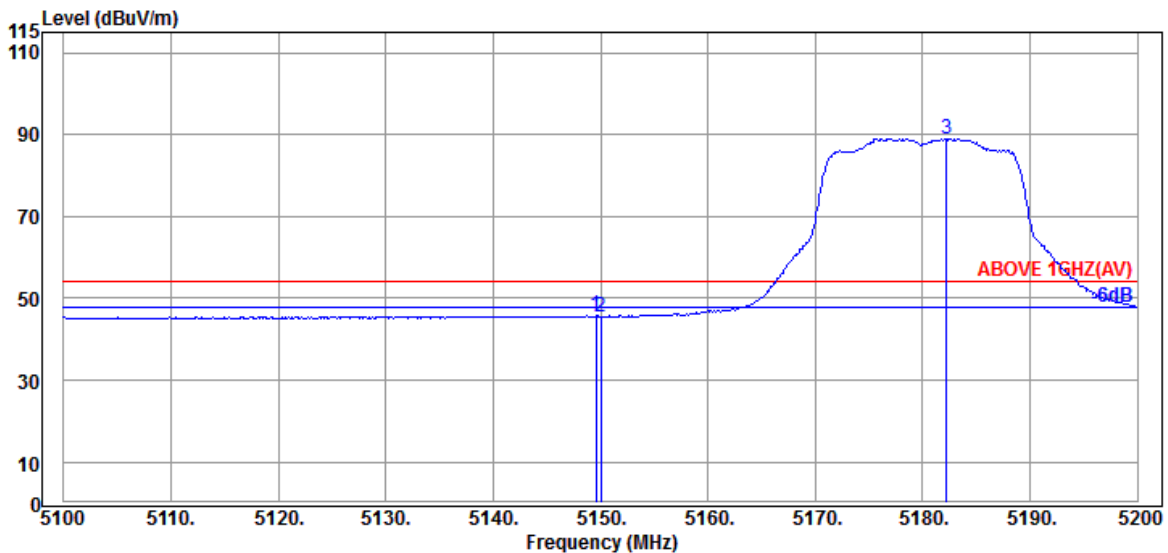


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	10.70	34.35	35.15	45.70	54.00	8.30	Average
5150.000	34.20	10.70	34.35	35.06	45.61	54.00	8.39	Average
@ 5182.200	34.20	10.72	34.34	78.38	88.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

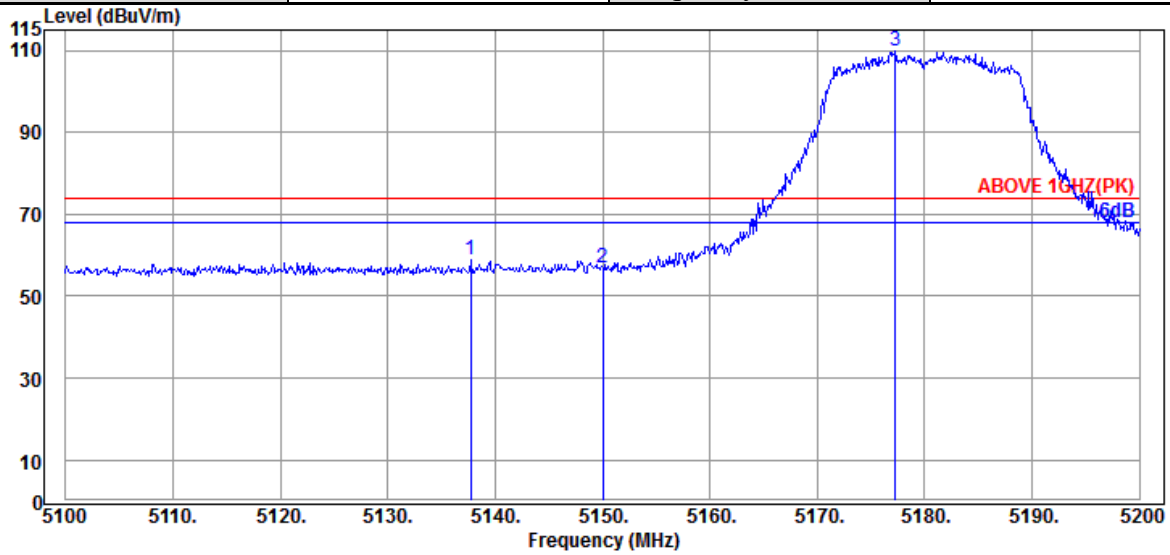

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.700	34.17	10.70	34.36	48.41	58.92	74.00	15.08	Peak
5150.000	34.20	10.70	34.35	46.34	56.89	74.00	17.11	Peak
@ 5177.300	34.20	10.72	34.34	99.23	109.81	---	---	Peak

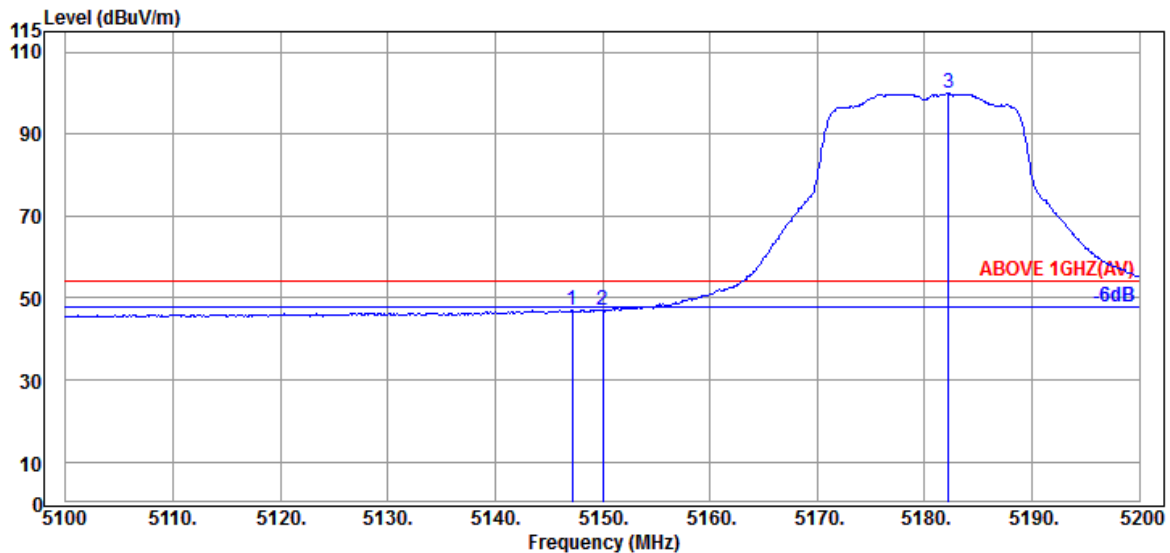


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	34.20	10.70	34.35	36.53	47.08	54.00	6.92	Average
5150.000	34.20	10.70	34.35	36.58	47.13	54.00	6.87	Average
@ 5182.200	34.20	10.72	34.34	89.47	100.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

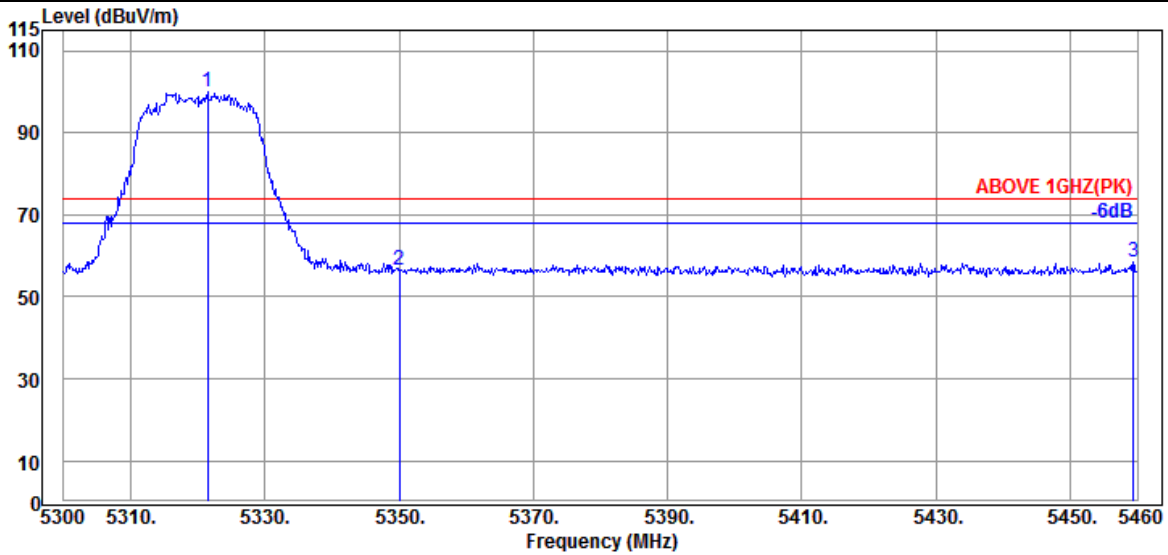

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.440	34.53	10.81	34.29	89.04	100.09	---	---	Peak
5350.080	34.60	10.83	34.27	45.49	56.65	74.00	17.35	Peak
5459.360	34.50	10.89	34.24	47.19	58.34	74.00	15.66	Peak

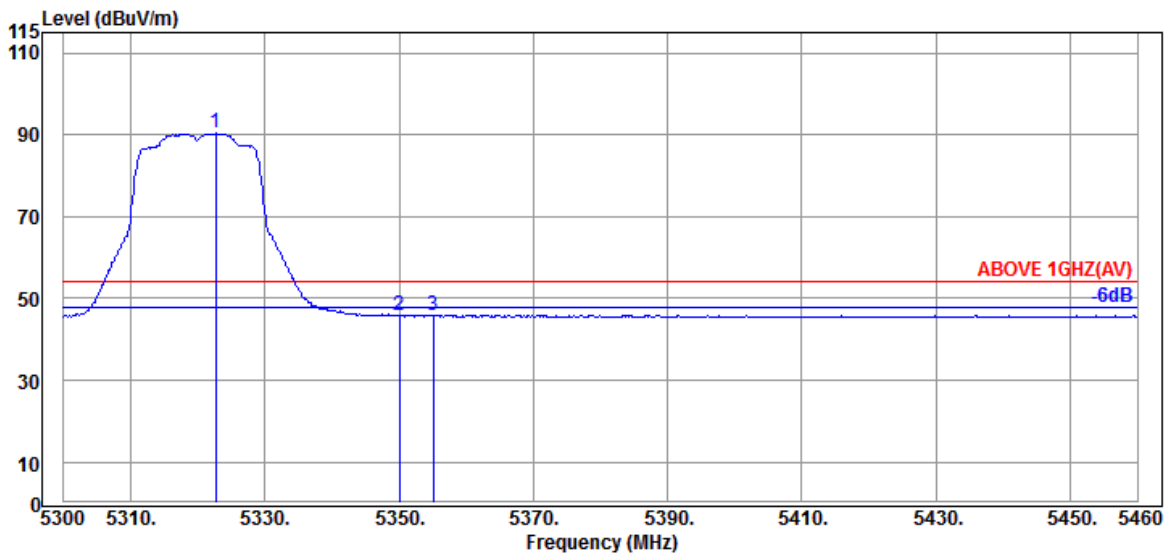


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	34.53	10.83	34.28	79.22	90.30	---	---	Average
5350.080	34.60	10.83	34.27	34.54	45.70	54.00	8.30	Average
5355.040	34.63	10.83	34.27	34.74	45.93	54.00	8.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

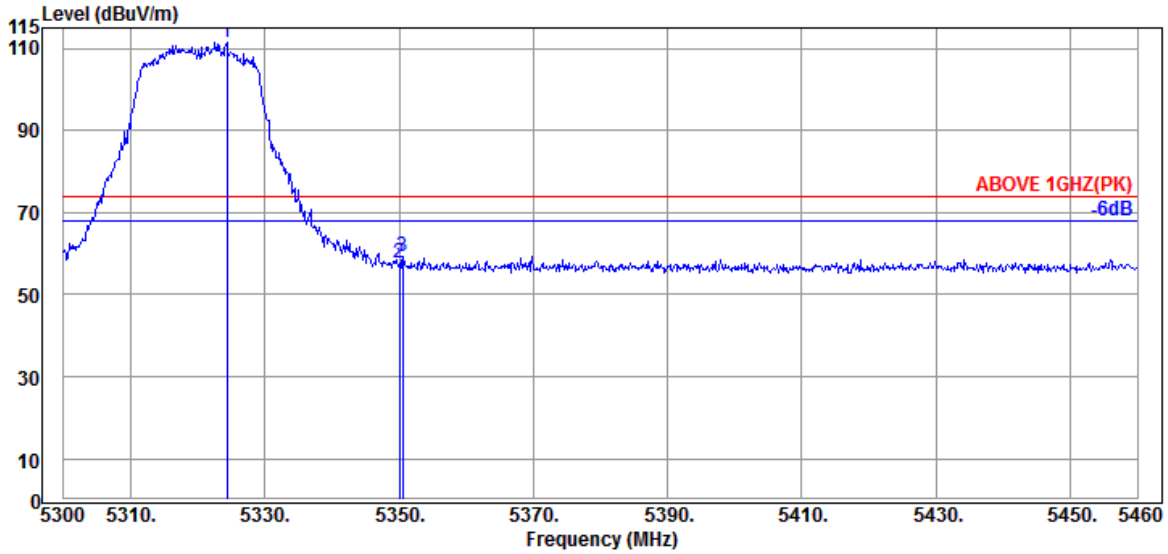

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.320	34.57	10.83	34.28	100.42	111.54	---	---	Peak
5350.080	34.60	10.83	34.27	46.39	57.55	74.00	16.45	Peak
5350.560	34.60	10.83	34.27	48.06	59.22	74.00	14.78	Peak

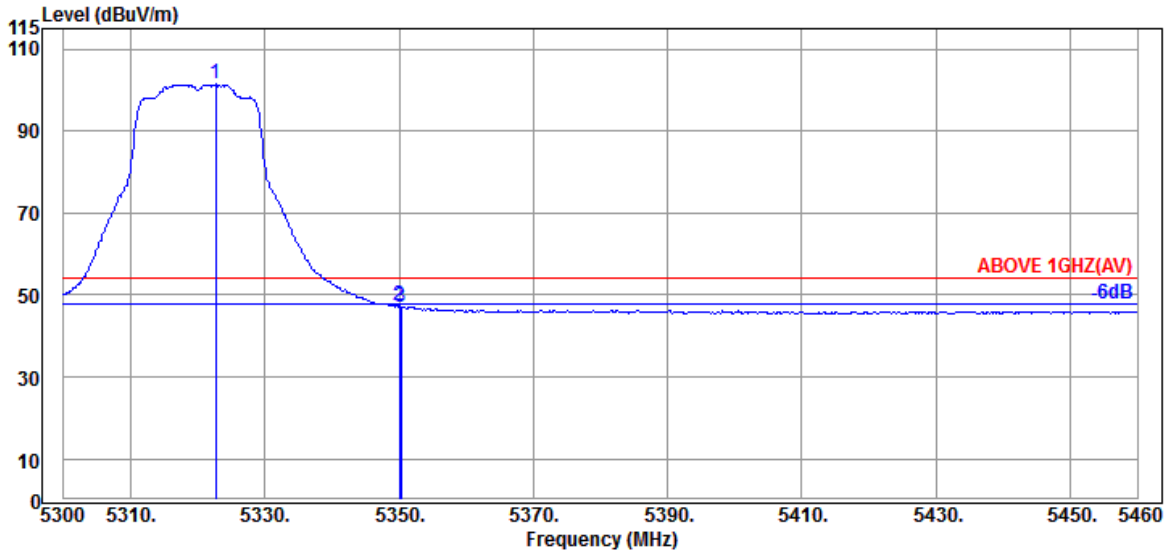


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	34.53	10.83	34.28	90.38	101.46	---	---	Average
5350.080	34.60	10.83	34.27	36.18	47.34	54.00	6.66	Average
5350.240	34.60	10.83	34.27	36.03	47.19	54.00	6.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

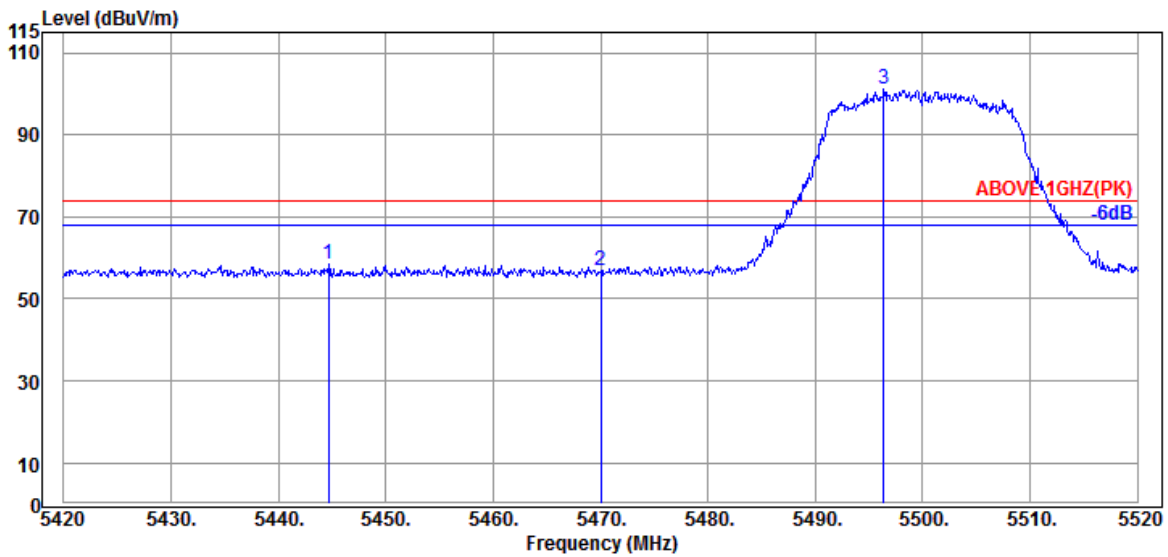

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.700	34.55	10.89	34.25	47.17	58.36	74.00	15.64	Peak
5470.000	34.47	10.91	34.24	45.93	57.07	74.00	16.93	Peak
@ 5496.400	34.40	10.93	34.23	89.92	101.02	---	---	Peak

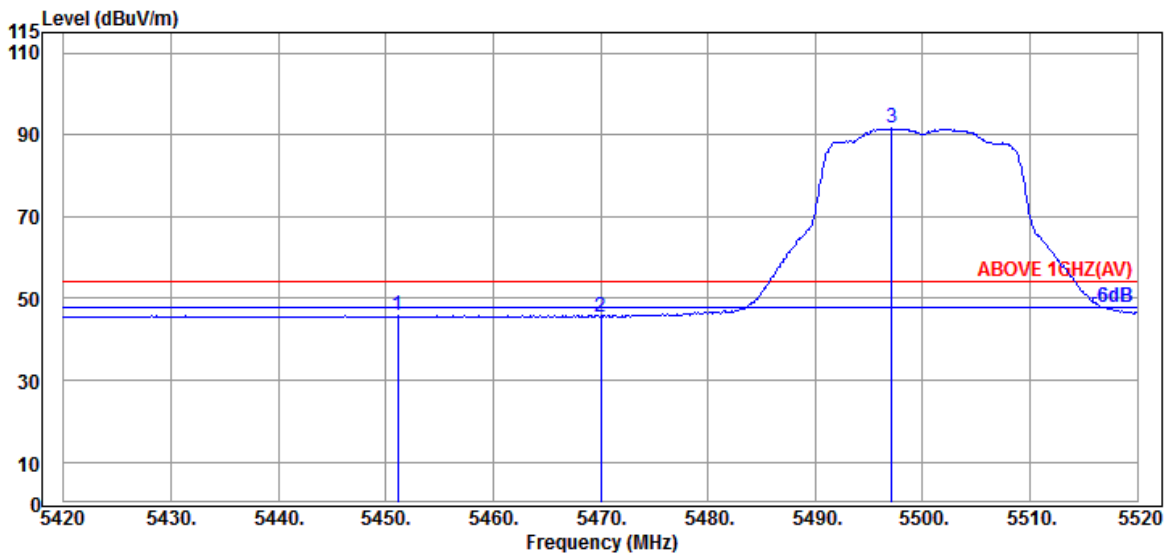


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.100	34.50	10.89	34.24	34.64	45.79	54.00	8.21	Average
5470.000	34.47	10.91	34.24	34.49	45.63	54.00	8.37	Average
@ 5497.100	34.40	10.93	34.23	80.42	91.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

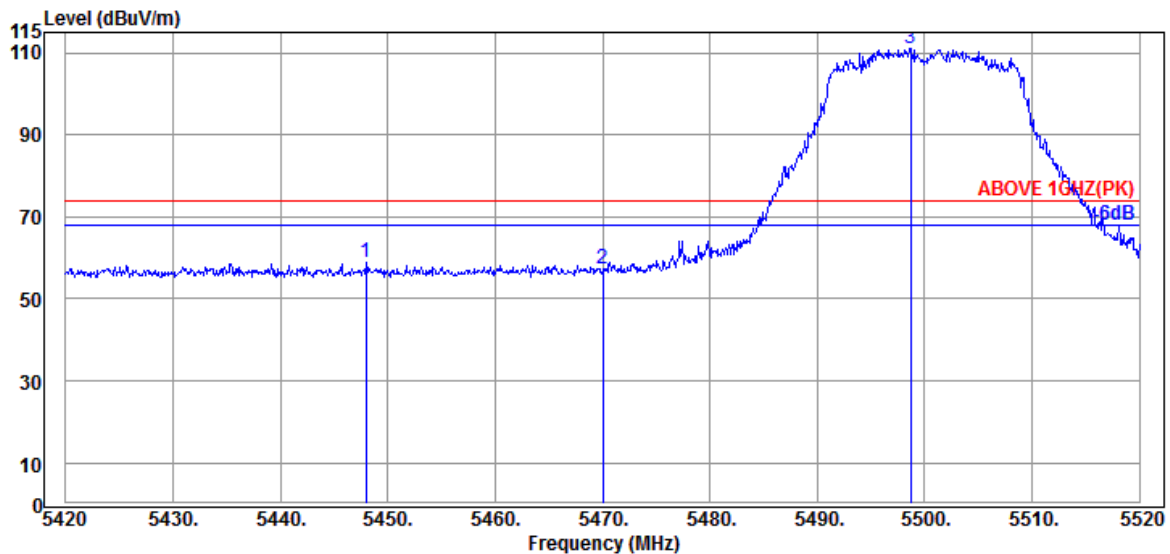

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.50	10.89	34.25	47.56	58.70	74.00	15.30	Peak
5470.000	34.47	10.91	34.24	46.03	57.17	74.00	16.83	Peak
@ 5498.700	34.40	10.93	34.23	100.13	111.23	---	---	Peak

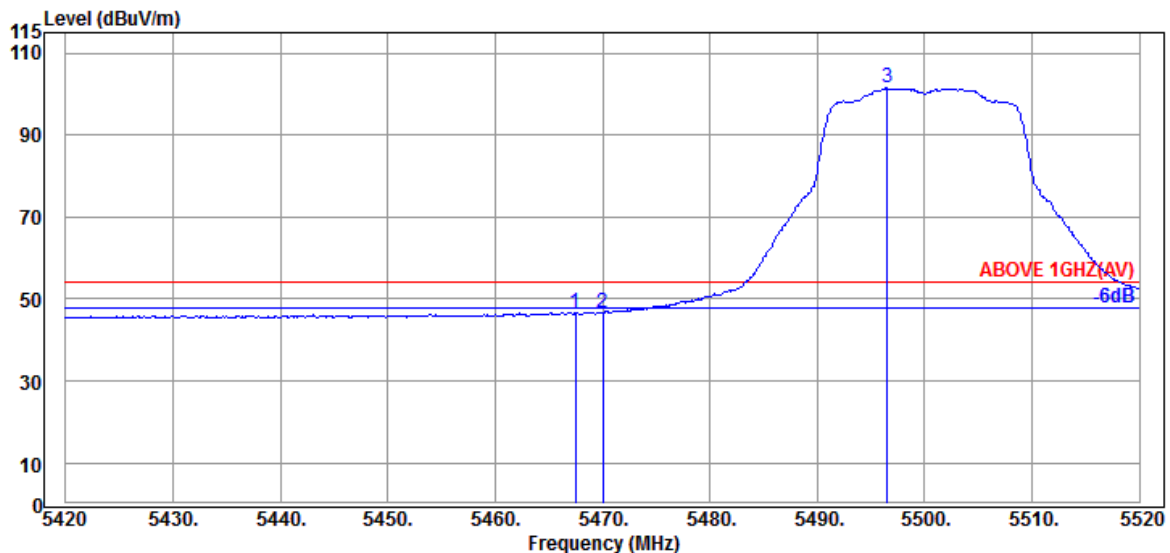


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.47	10.91	34.24	35.55	46.69	54.00	7.31	Average
5470.000	34.47	10.91	34.24	35.55	46.69	54.00	7.31	Average
@ 5496.500	34.40	10.93	34.23	90.32	101.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

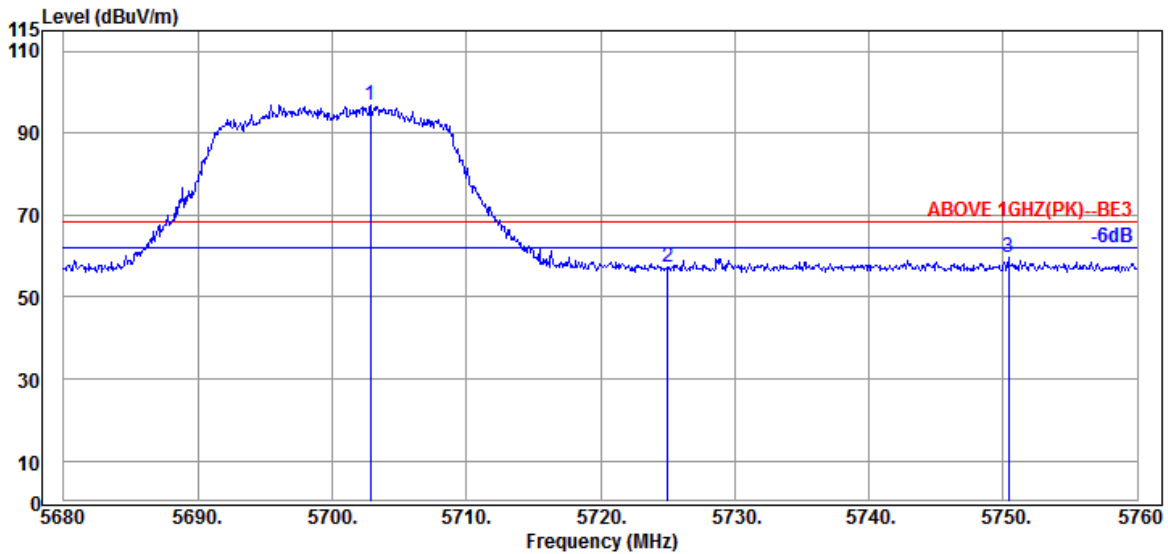

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.880	34.40	11.03	34.31	85.83	96.95	---	---	Peak
5725.040	34.67	11.05	34.32	45.84	57.24	68.20	10.96	Peak
5750.400	34.80	11.06	34.33	47.95	59.48	68.20	8.72	Peak

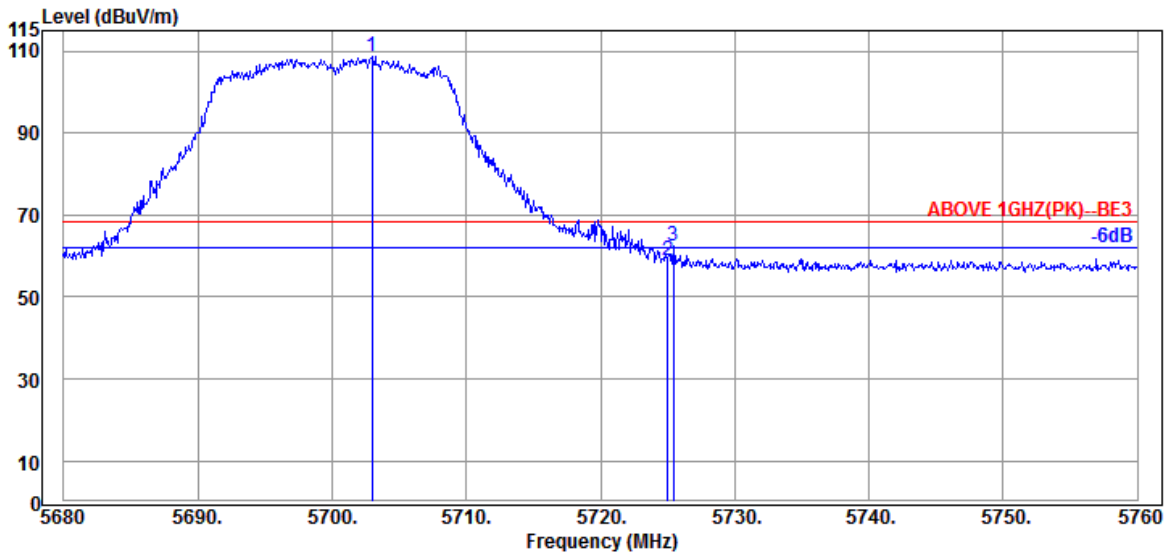


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.960	34.40	11.03	34.31	97.64	108.76	---	---	Peak
5725.040	34.67	11.05	34.32	47.58	58.98	68.20	9.22	Peak
5725.440	34.67	11.05	34.32	51.13	62.53	68.20	5.67	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

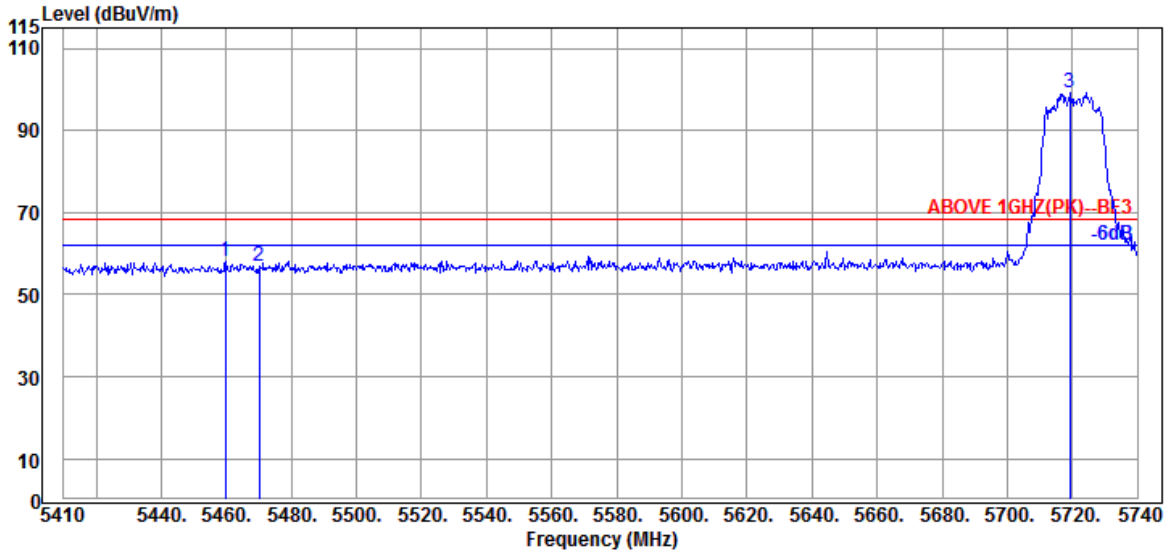

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.830	34.50	10.91	34.24	46.97	58.14	68.20	10.06	Peak
5470.060	34.47	10.91	34.24	45.73	56.87	68.20	11.33	Peak
@ 5719.210	34.53	11.05	34.32	88.05	99.31	---	---	Peak

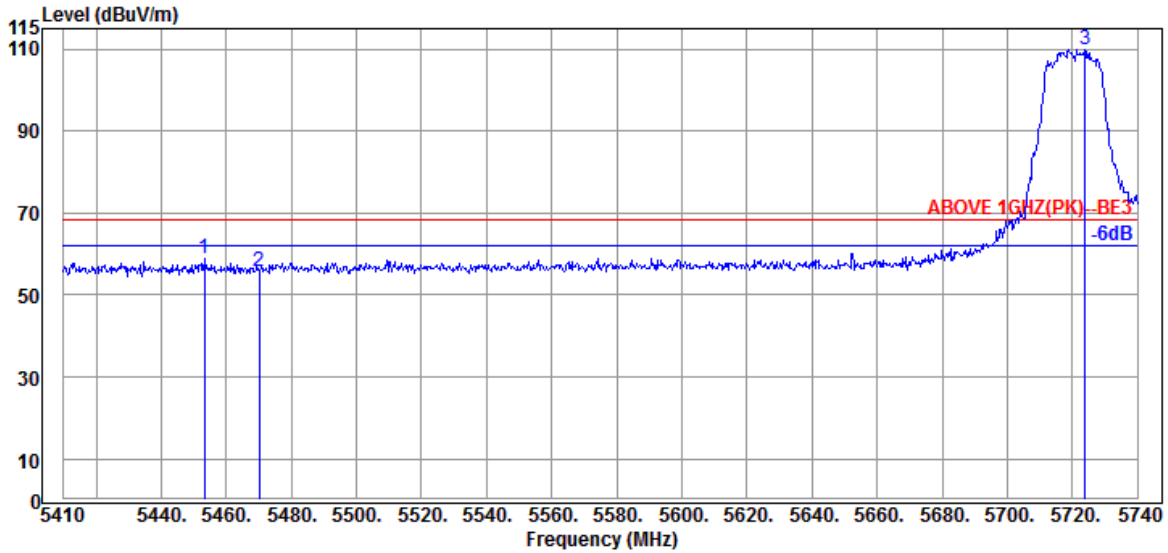


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.230	34.50	10.89	34.24	47.56	58.71	68.20	9.49	Peak
5470.060	34.47	10.91	34.24	44.63	55.77	68.20	12.43	Peak
@ 5723.830	34.67	11.05	34.32	98.52	109.92	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

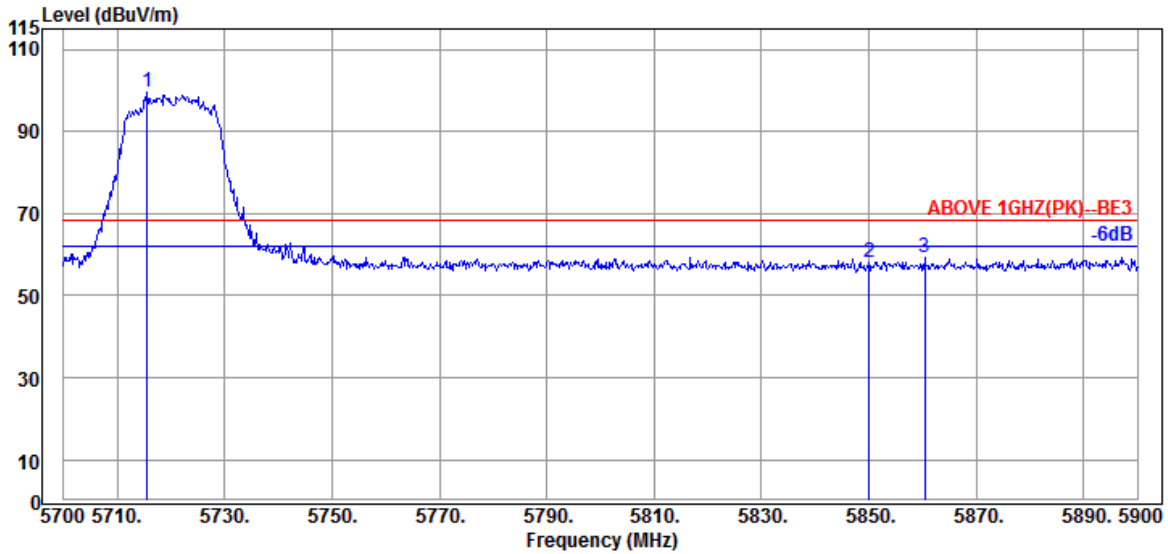

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.600	34.53	11.05	34.32	88.17	99.43	---	---	Peak
5850.000	35.10	11.10	34.38	46.32	58.14	68.20	10.06	Peak
5860.400	35.20	11.12	34.39	47.22	59.15	68.20	9.05	Peak

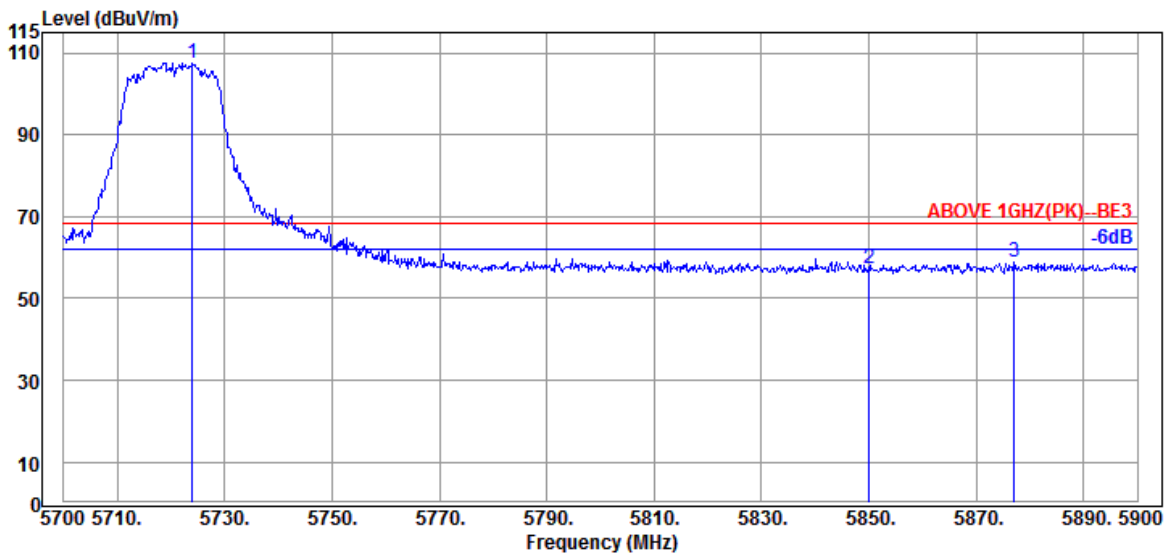


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.000	34.67	11.05	34.32	96.27	107.67	---	---	Peak
5850.000	35.10	11.10	34.38	45.50	57.32	68.20	10.88	Peak
5877.000	35.30	11.12	34.39	46.78	58.81	68.20	9.39	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

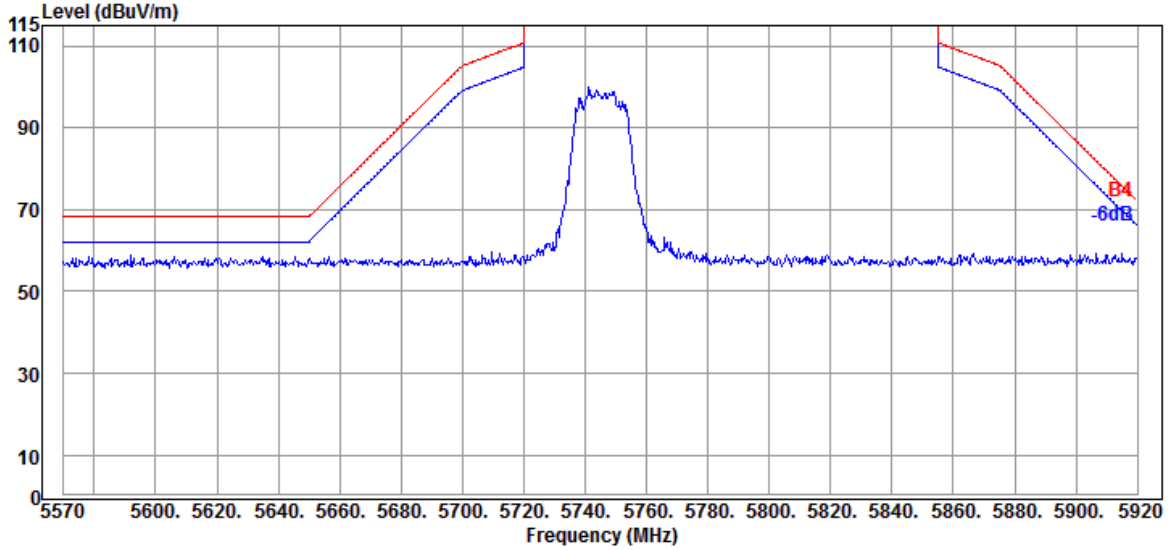


Antenna at Vertical Polarization

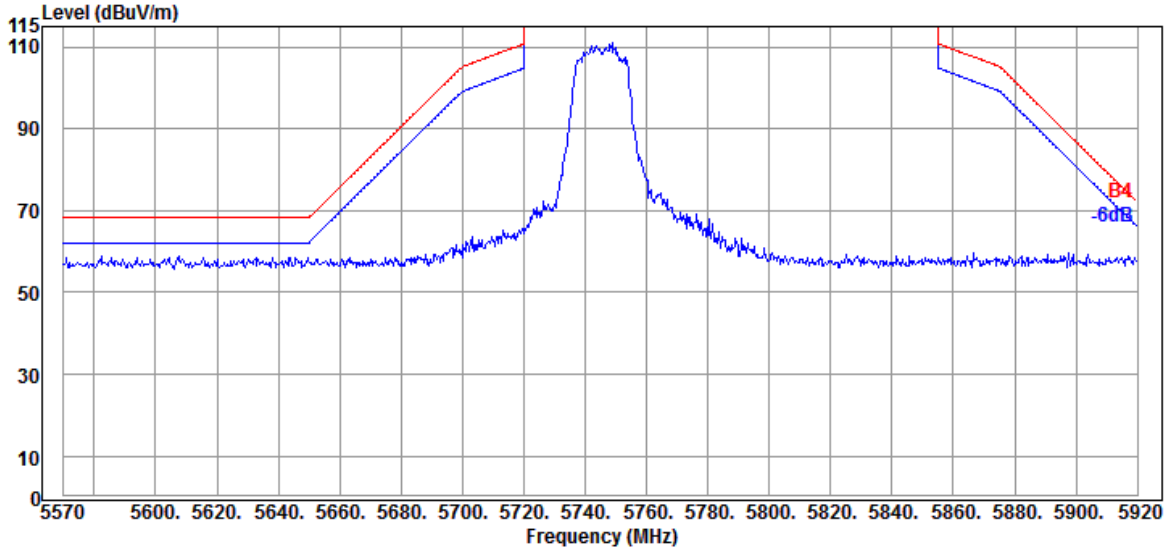


Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

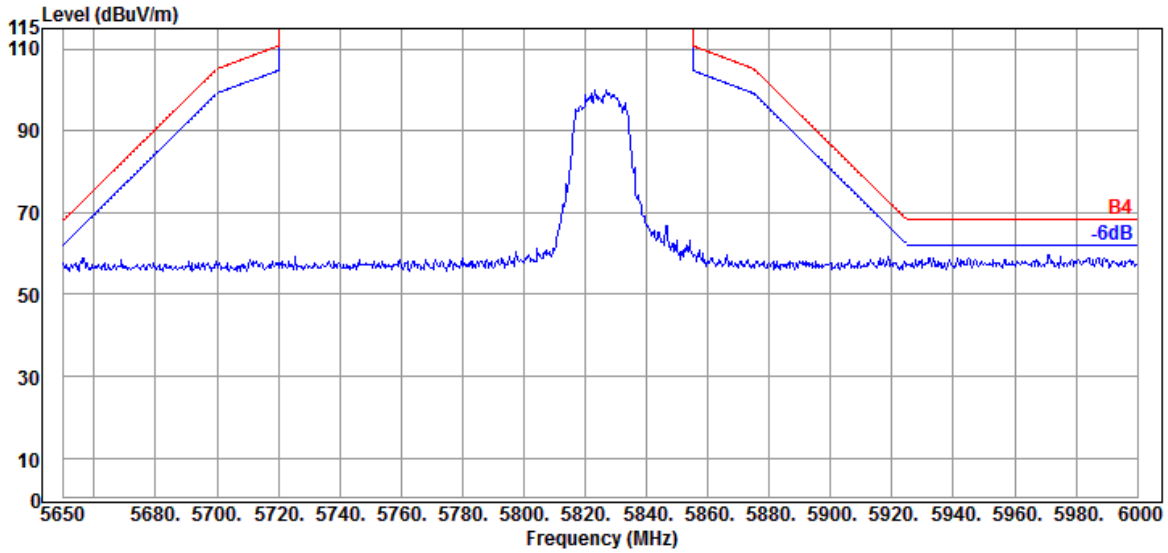

Antenna at Vertical Polarization

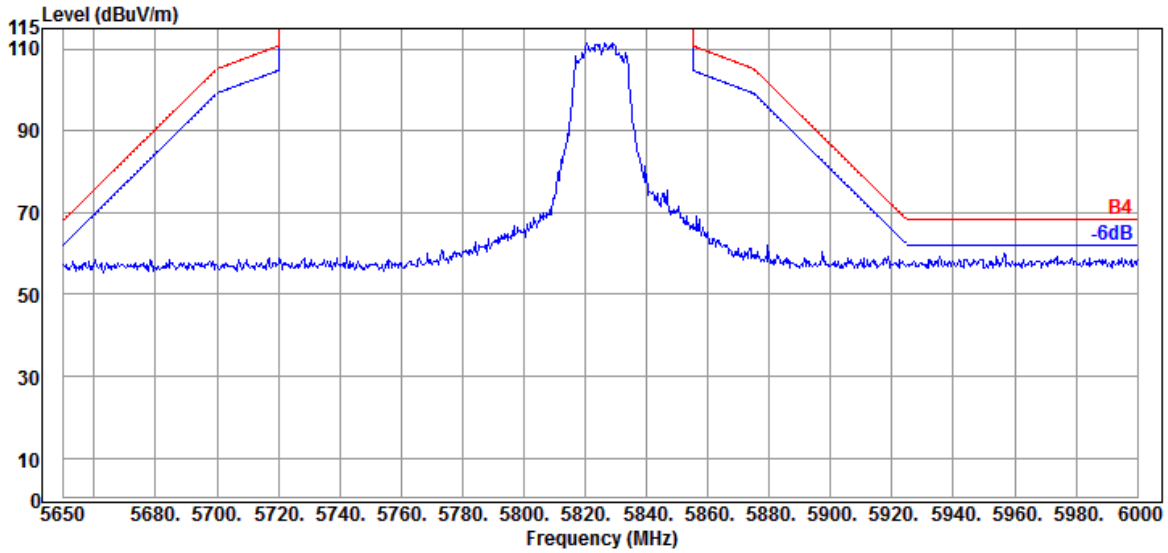


Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

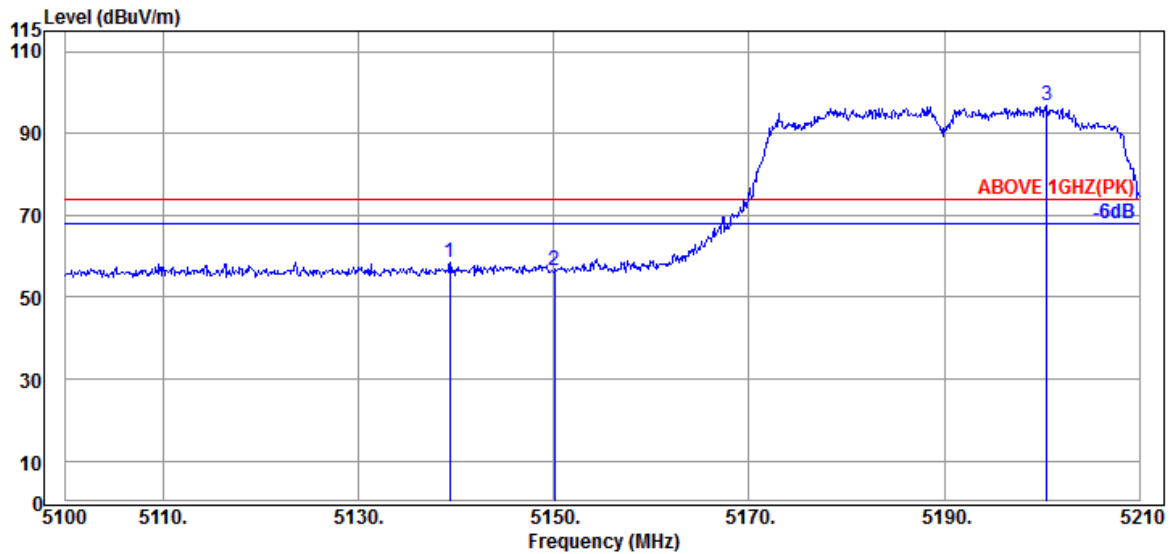

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5139.380	34.17	10.70	34.36	47.91	58.42	74.00	15.58	Peak
5150.050	34.20	10.70	34.35	45.96	56.51	74.00	17.49	Peak
@ 5200.540	34.20	10.74	34.33	86.11	96.72	---	---	Peak

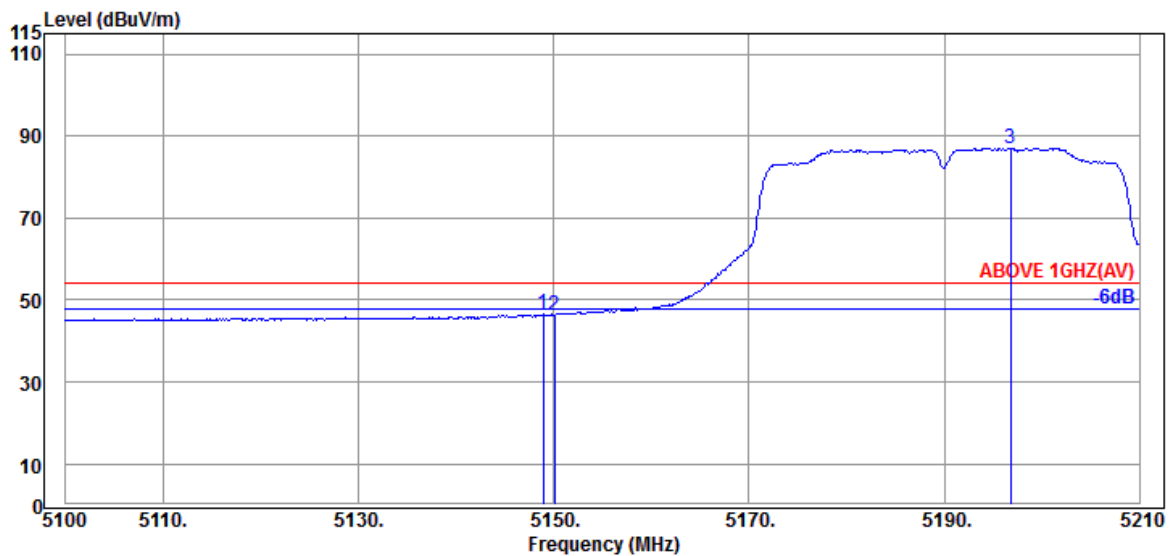


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.950	34.20	10.70	34.35	35.90	46.45	54.00	7.55	Average
5150.050	34.20	10.70	34.35	35.77	46.32	54.00	7.68	Average
@ 5196.800	34.20	10.74	34.33	76.38	86.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

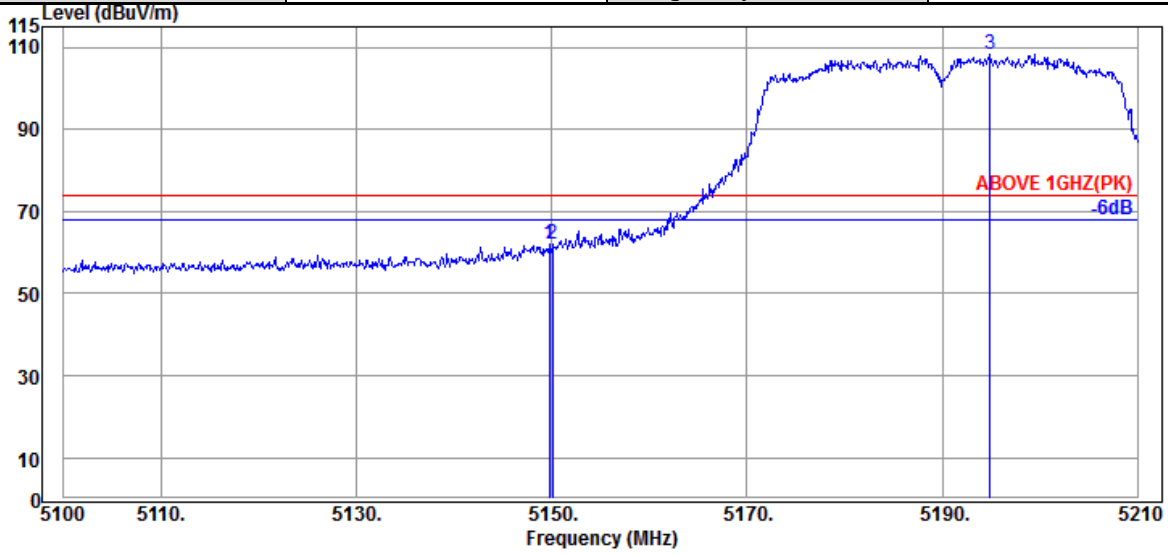

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	10.70	34.35	51.65	62.20	74.00	11.80	Peak
5150.050	34.20	10.70	34.35	51.43	61.98	74.00	12.02	Peak
@ 5194.930	34.20	10.74	34.33	97.84	108.45	---	---	Peak

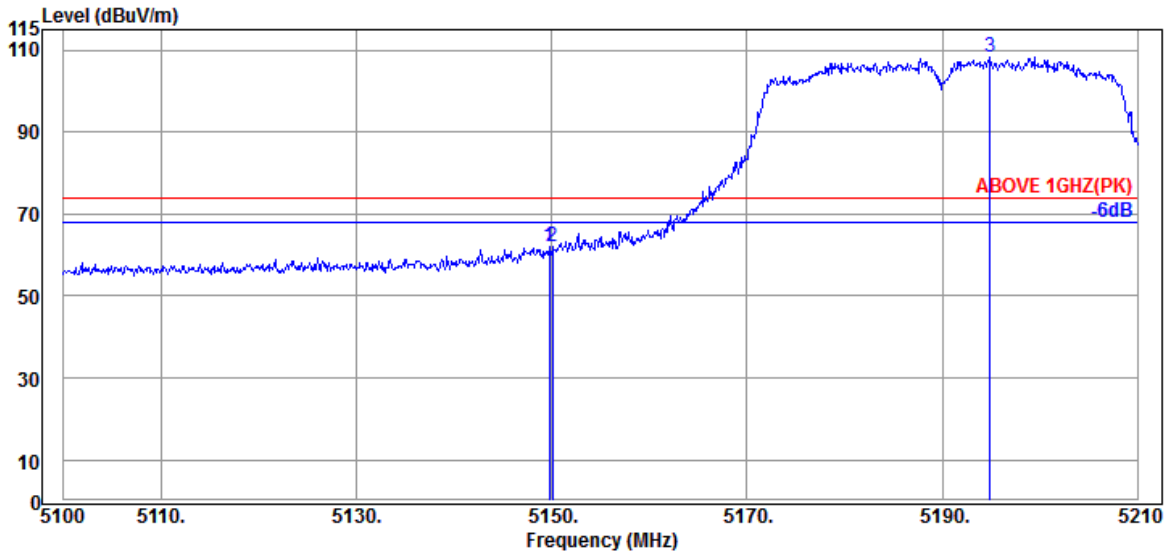


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	10.70	34.35	41.12	51.67	54.00	2.33	Average
5150.050	34.20	10.70	34.35	40.90	51.45	54.00	2.55	Average
@ 5201.420	34.20	10.74	34.33	87.59	98.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

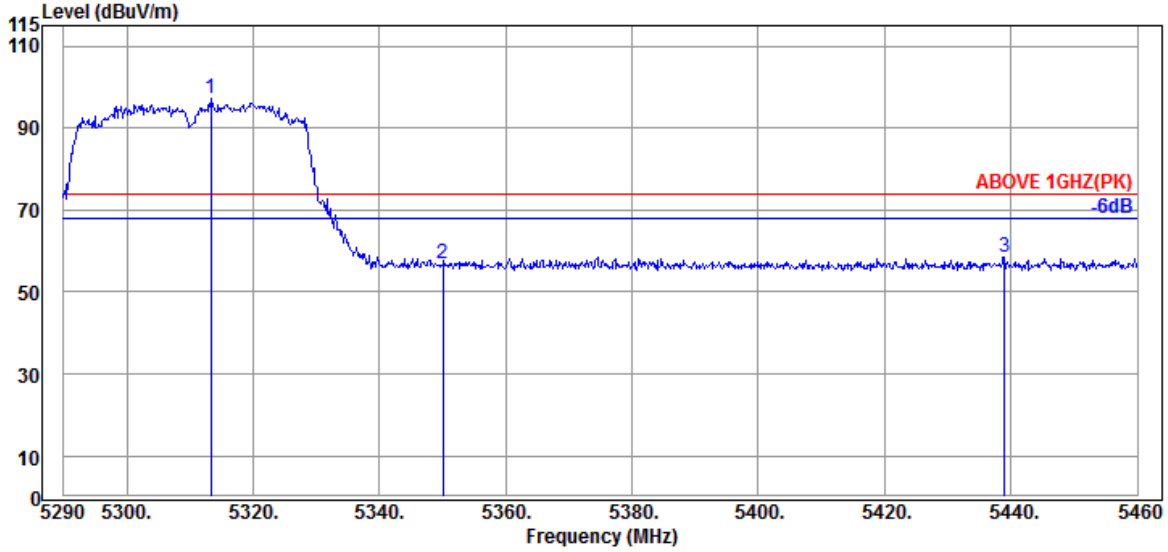

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5313.290	34.53	10.81	34.29	86.04	97.09	---	---	Peak
	5350.010	34.60	10.83	34.27	45.60	56.76	74.00	17.24	Peak
	5438.920	34.55	10.89	34.25	47.49	58.68	74.00	15.32	Peak

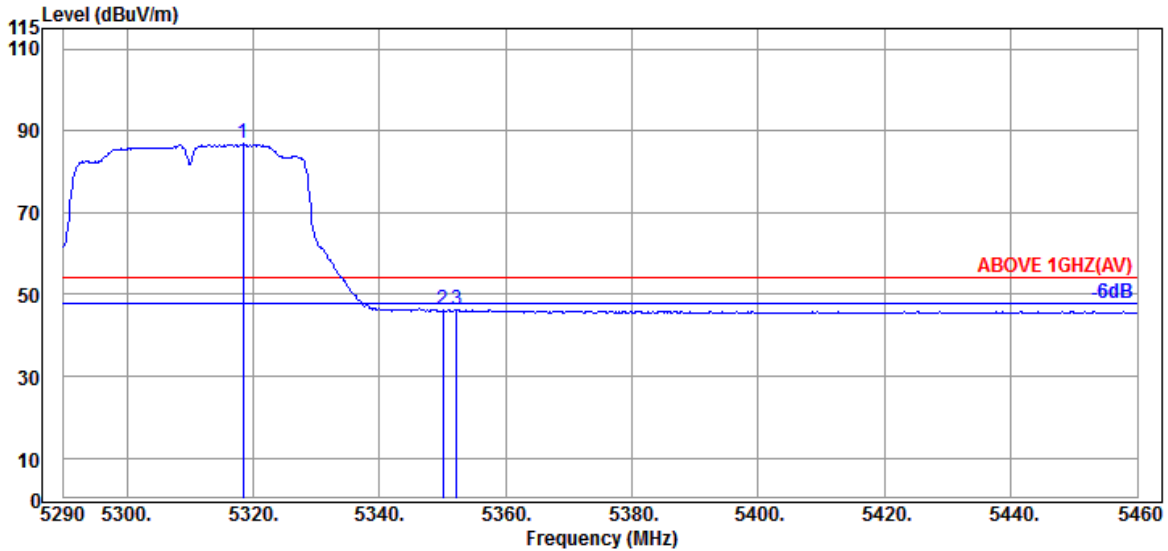


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.390	34.53	10.81	34.29	75.77	86.82	---	---	Average
	5350.010	34.60	10.83	34.27	34.96	46.12	54.00	7.88	Average
	5352.220	34.60	10.83	34.27	35.17	46.33	54.00	7.67	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

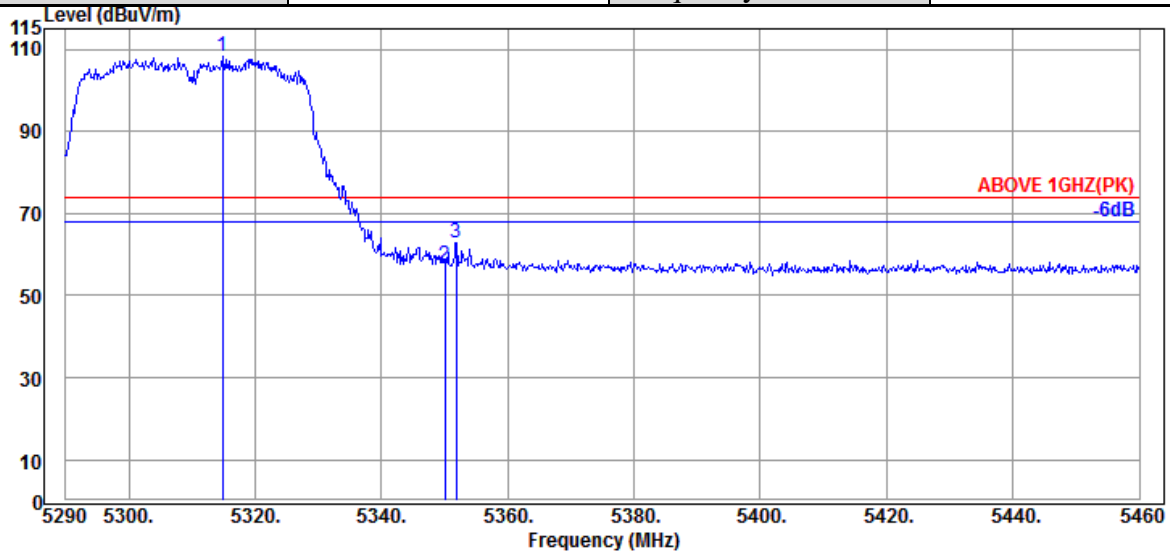

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.820	34.53	10.81	34.29	97.29	108.34	---	---	Peak
5350.010	34.60	10.83	34.27	46.24	57.40	74.00	16.60	Peak
5351.880	34.60	10.83	34.27	51.75	62.91	74.00	11.09	Peak

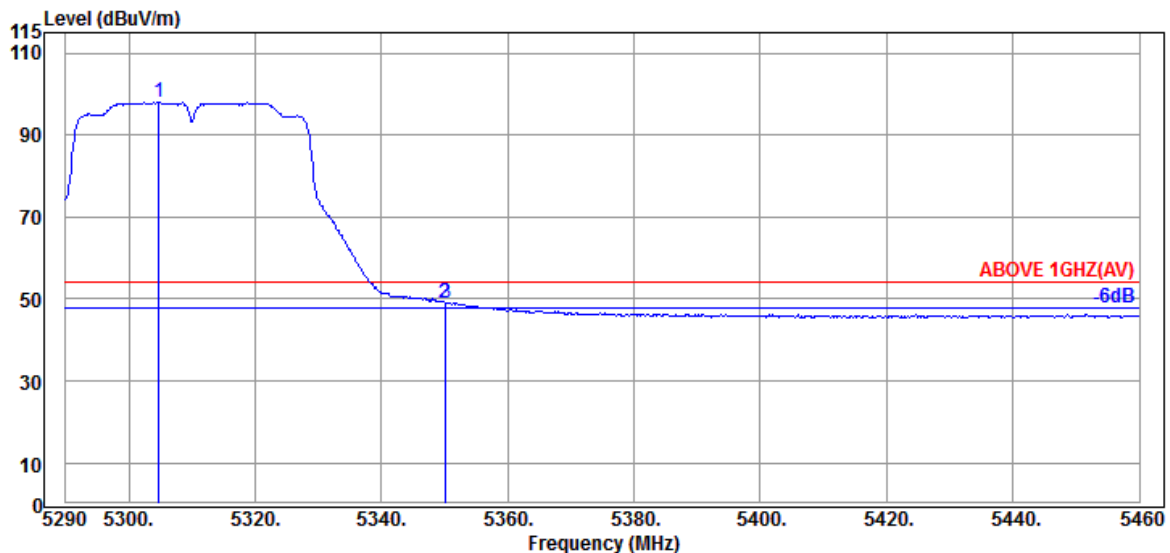


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.790	34.50	10.81	34.29	87.18	98.20	---	---	Average
5350.010	34.60	10.83	34.27	38.03	49.19	54.00	4.81	Average
5350.180	34.60	10.83	34.27	37.95	49.11	54.00	4.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

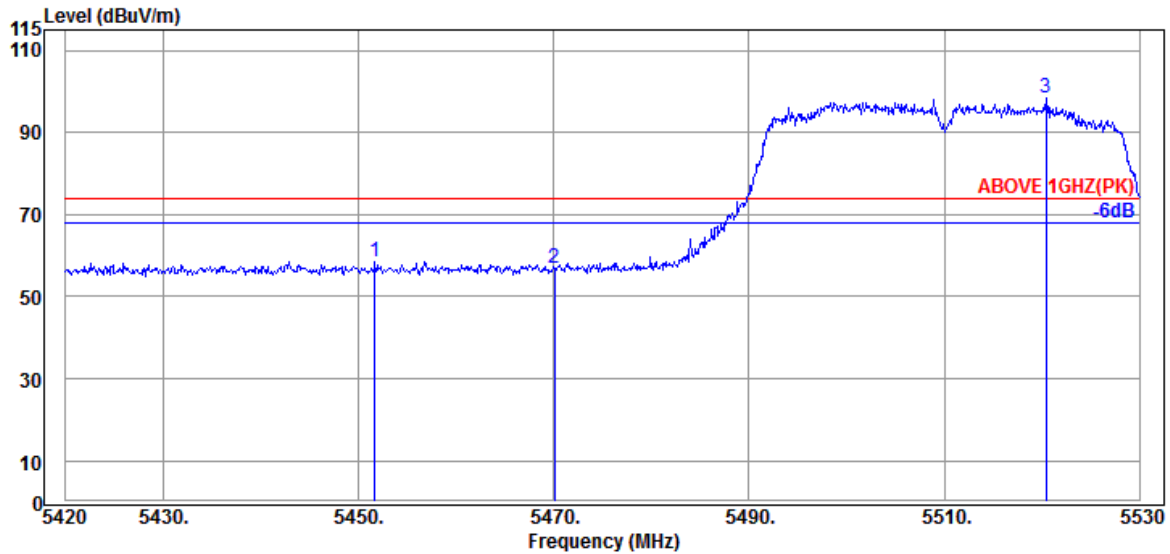

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.680	34.50	10.89	34.24	47.47	58.62	74.00	15.38	Peak
5470.050	34.47	10.91	34.24	45.77	56.91	74.00	17.09	Peak
@ 5520.430	34.37	10.93	34.24	87.19	98.25	---	---	Peak

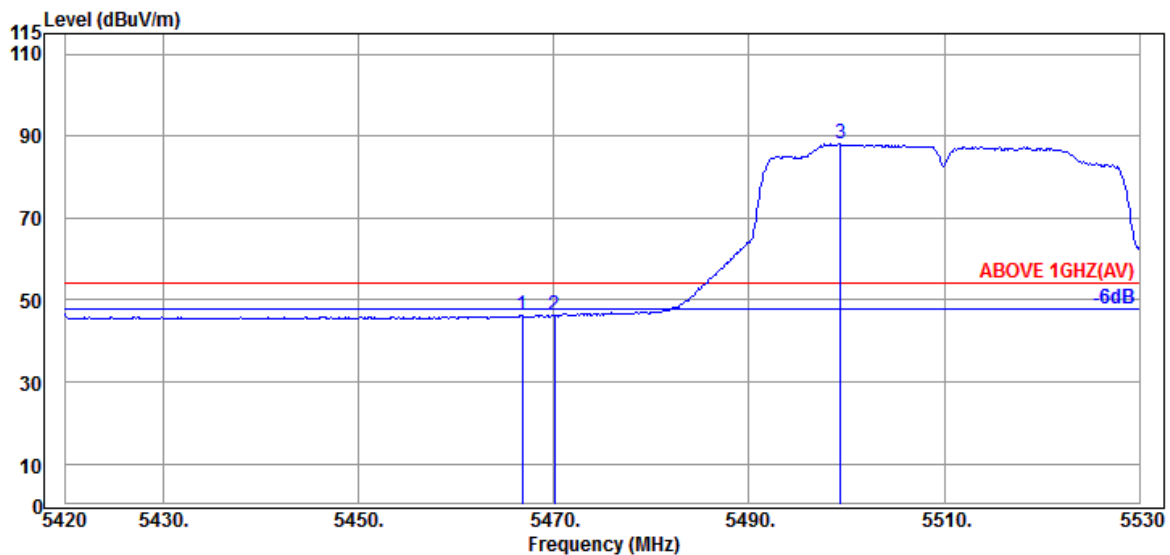


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.750	34.47	10.91	34.24	35.05	46.19	54.00	7.81	Average
5470.050	34.47	10.91	34.24	34.95	46.09	54.00	7.91	Average
@ 5499.420	34.40	10.93	34.23	76.95	88.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

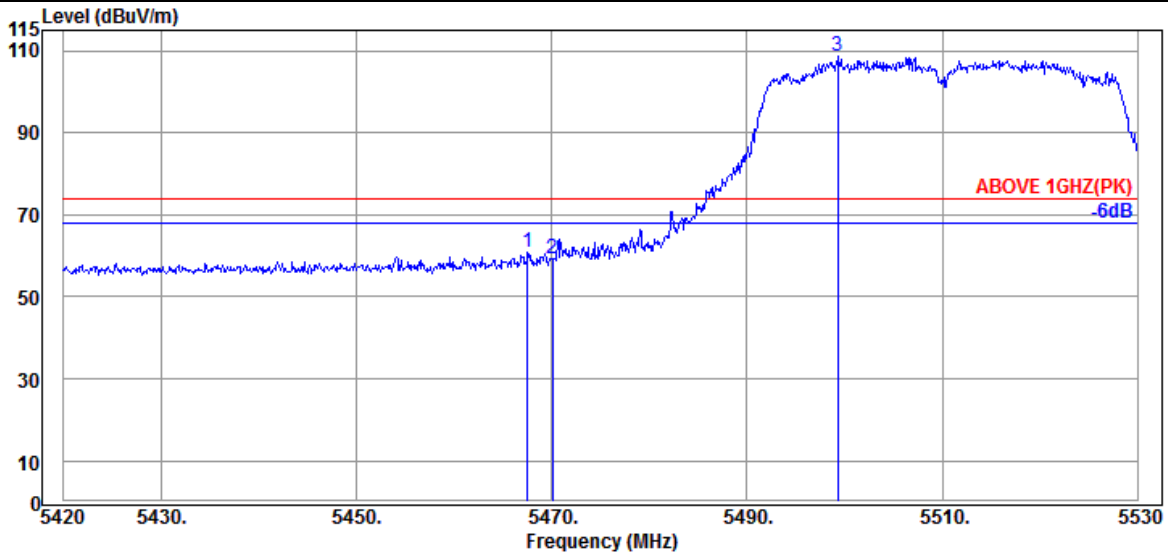

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.520	34.47	10.91	34.24	49.56	60.70	74.00	13.30	Peak
5470.050	34.47	10.91	34.24	47.94	59.08	74.00	14.92	Peak
@ 5499.310	34.40	10.93	34.23	97.41	108.51	---	---	Peak

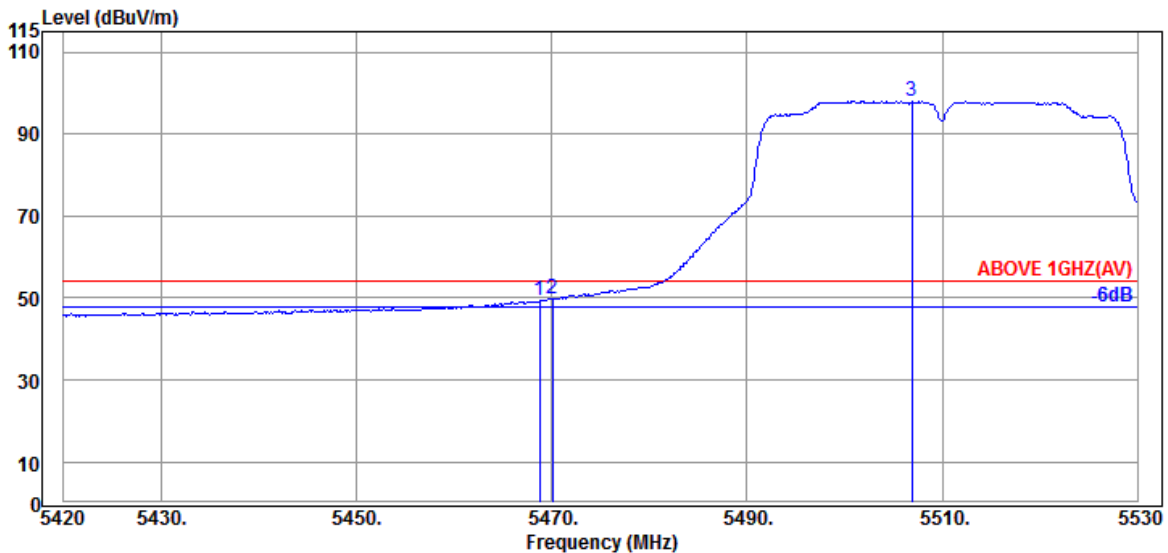


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.730	34.47	10.91	34.24	38.41	49.55	54.00	4.45	Average
5470.050	34.47	10.91	34.24	38.58	49.72	54.00	4.28	Average
@ 5506.900	34.40	10.93	34.24	86.94	98.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

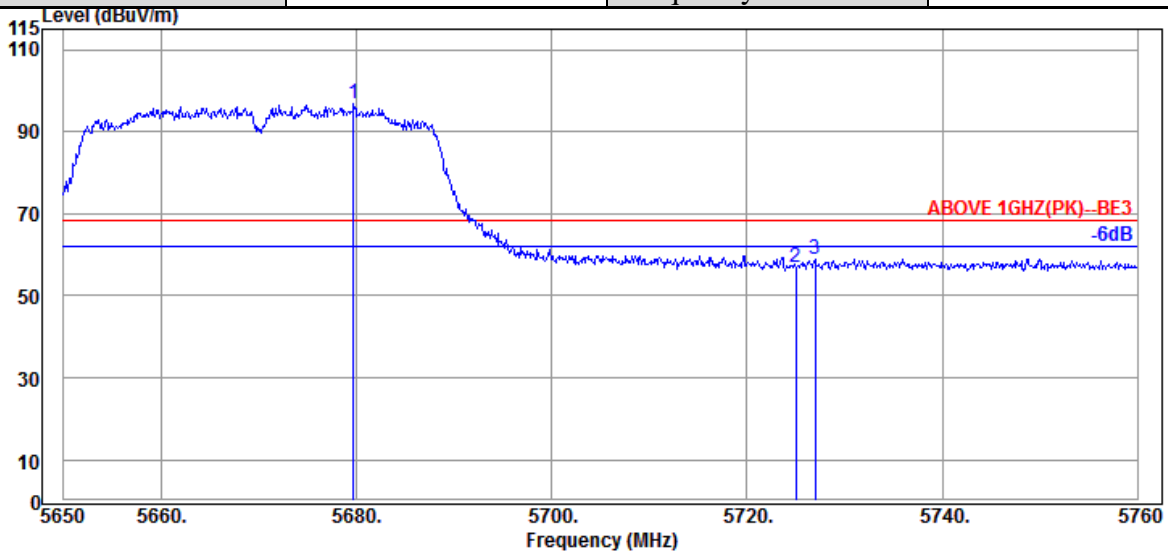

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.700	34.40	11.03	34.31	85.71	96.83	---	---	Peak
5725.020	34.67	11.05	34.32	45.68	57.08	68.20	11.12	Peak
5727.000	34.67	11.05	34.32	47.68	59.08	68.20	9.12	Peak

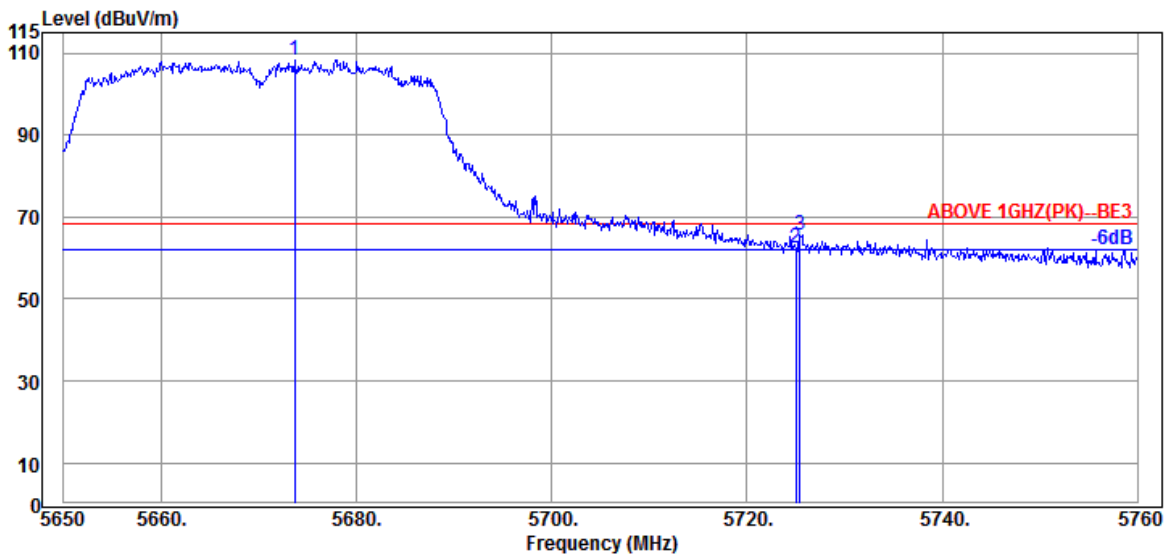


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.650	34.40	11.03	34.30	97.22	108.35	---	---	Peak
5725.020	34.67	11.05	34.32	51.12	62.52	68.20	5.68	Peak
5725.460	34.67	11.05	34.32	54.36	65.76	68.20	2.44	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

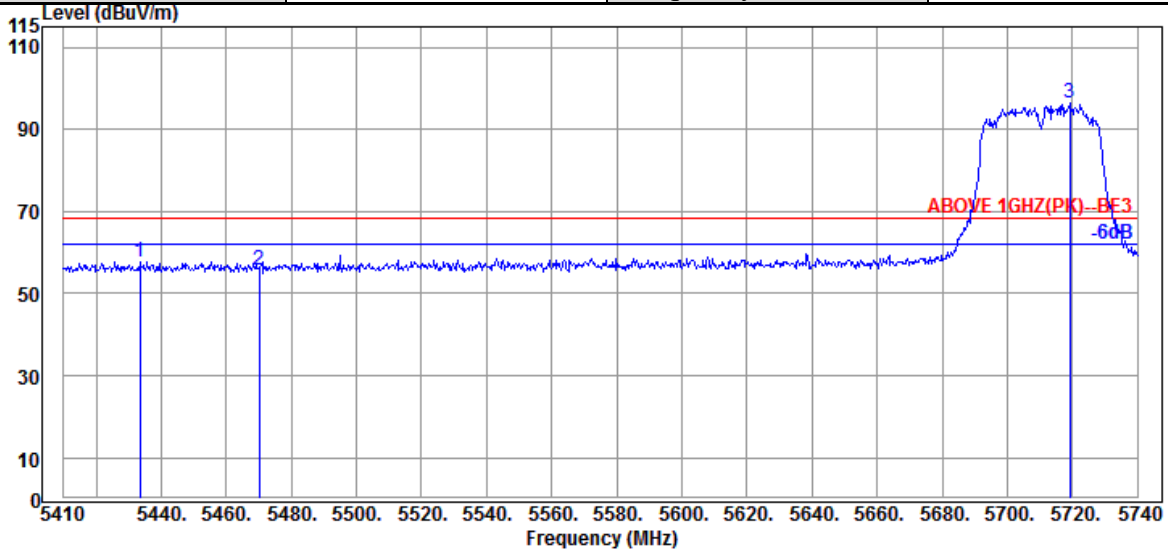

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.430	34.55	10.89	34.25	46.65	57.84	68.20	10.36	Peak
5470.060	34.47	10.91	34.24	44.54	55.68	68.20	12.52	Peak
@ 5719.210	34.53	11.05	34.32	85.08	96.34	---	---	Peak

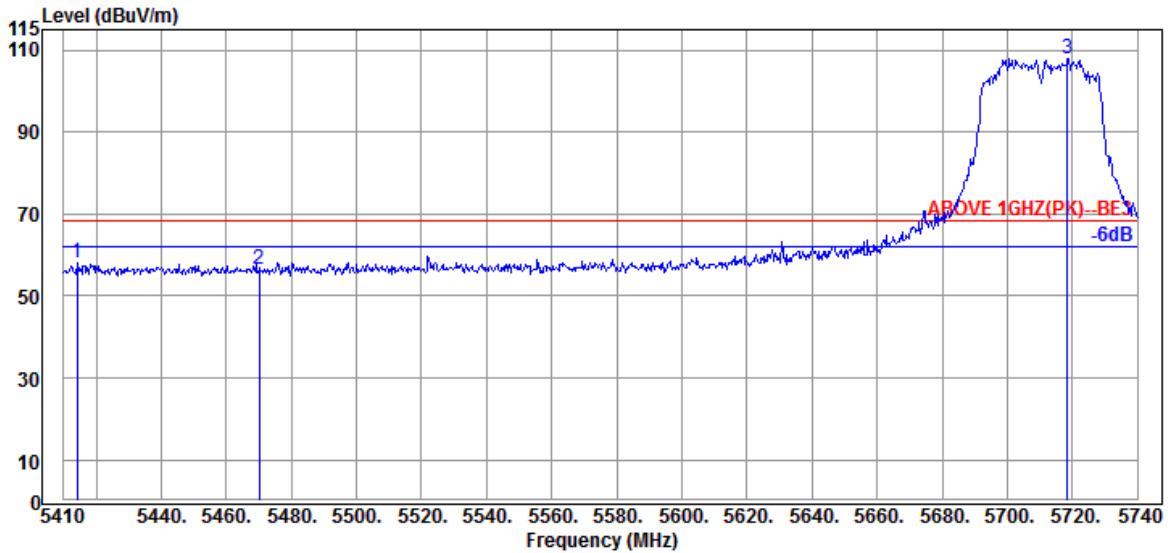


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5414.290	34.65	10.87	34.26	46.83	58.09	68.20	10.11	Peak
5470.060	34.47	10.91	34.24	45.19	56.33	68.20	11.87	Peak
@ 5718.550	34.53	11.05	34.32	96.59	107.85	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

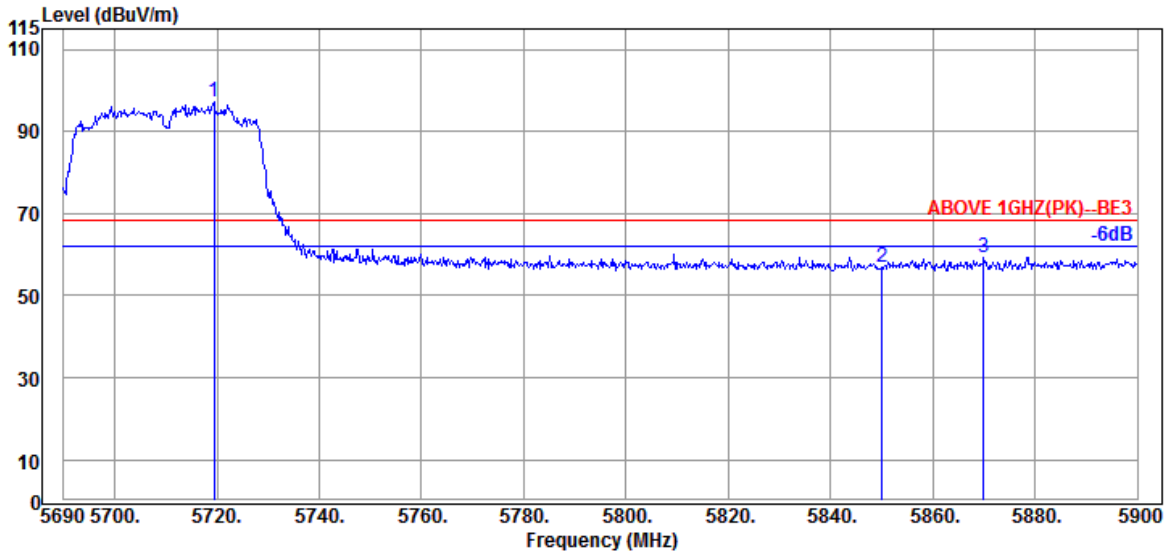

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.400	34.53	11.05	34.32	85.80	97.06	---	---	Peak
5850.020	35.10	11.10	34.38	45.07	56.89	68.20	11.31	Peak
5869.970	35.20	11.12	34.39	47.50	59.43	68.20	8.77	Peak

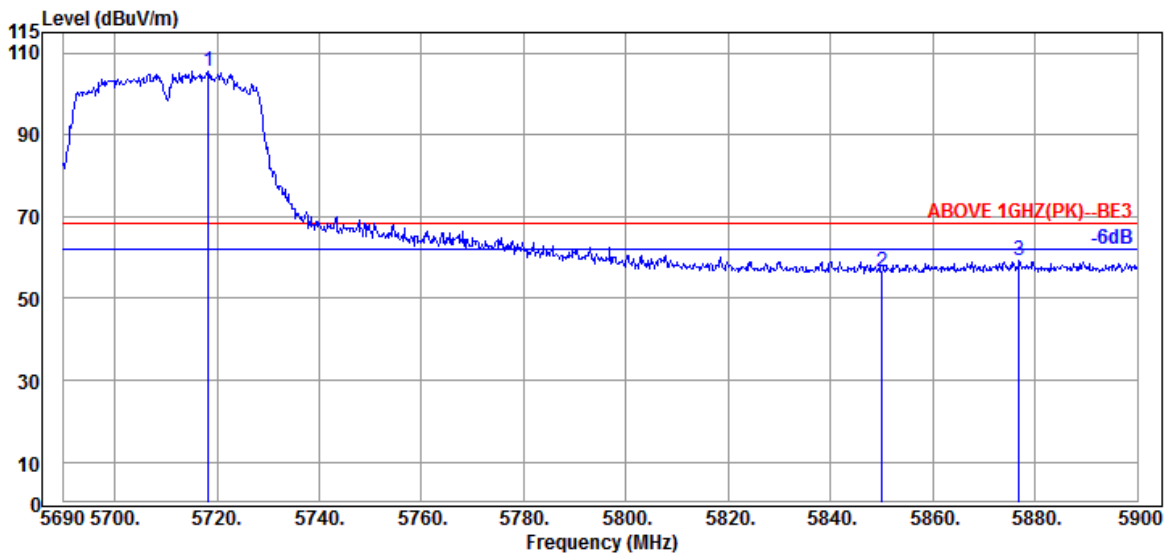


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.350	34.53	11.05	34.32	94.26	105.52	---	---	Peak
5850.020	35.10	11.10	34.38	44.89	56.71	68.20	11.49	Peak
5876.900	35.30	11.12	34.39	47.27	59.30	68.20	8.90	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

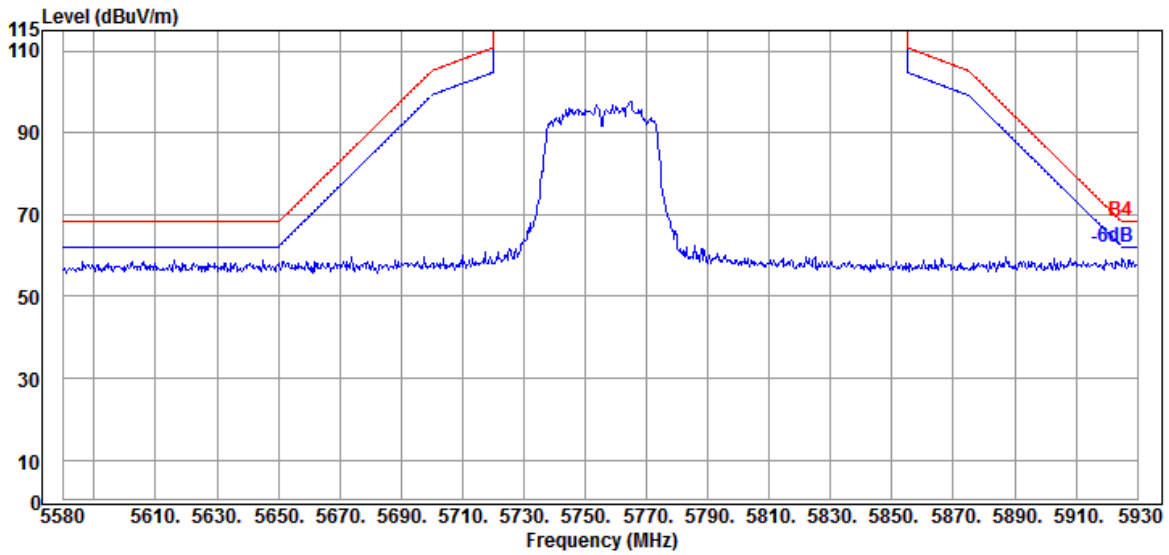


Antenna at Vertical Polarization

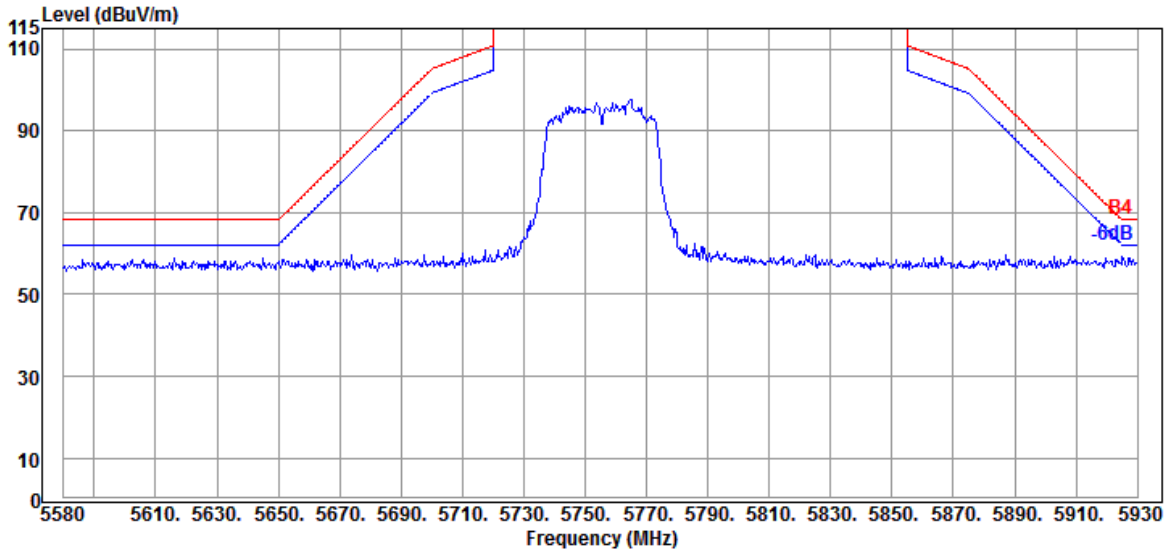


Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

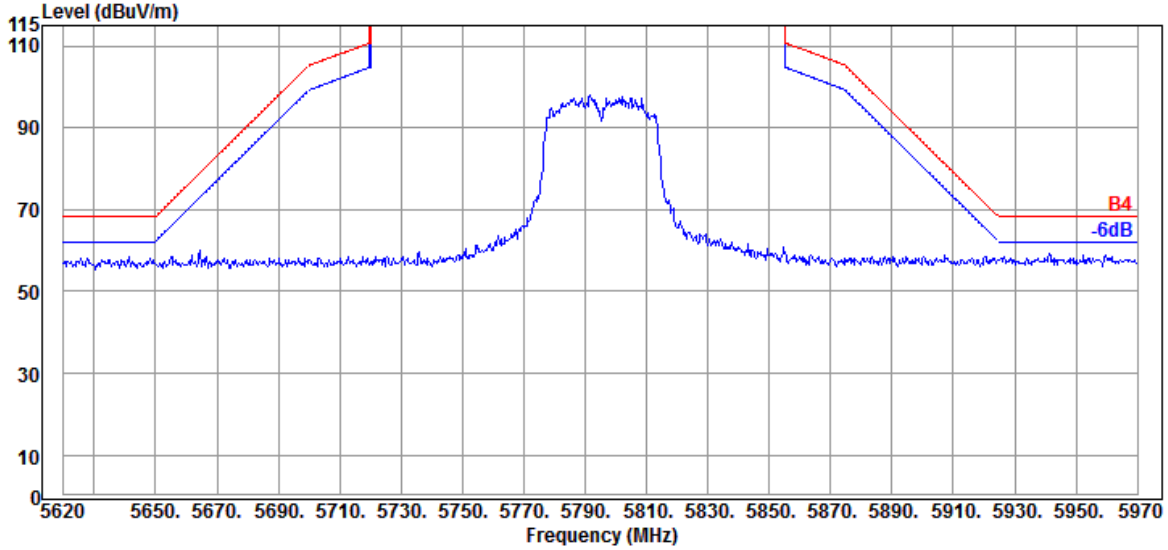

Antenna at Vertical Polarization

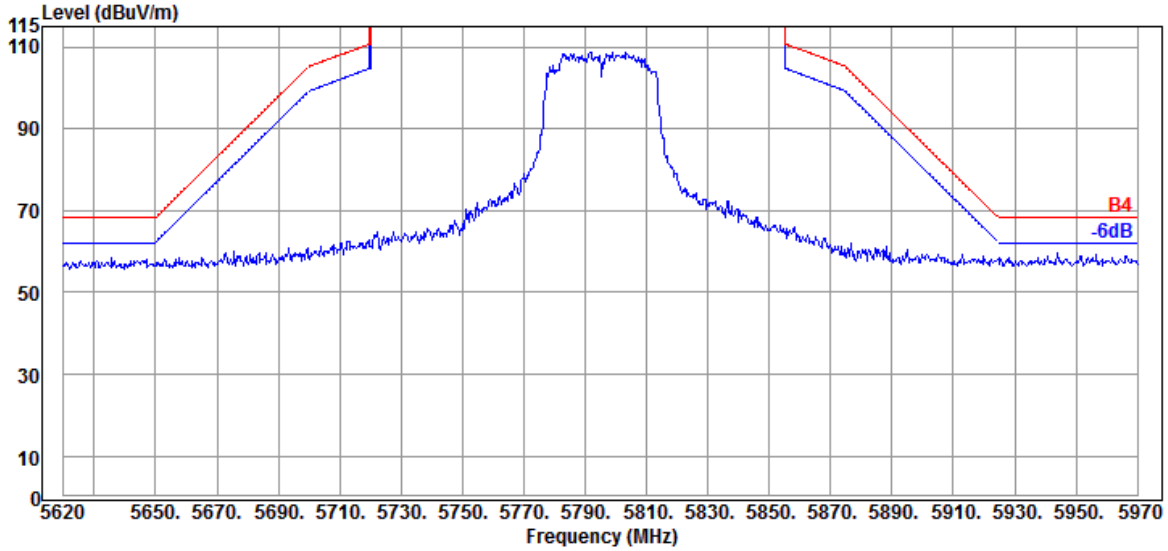


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

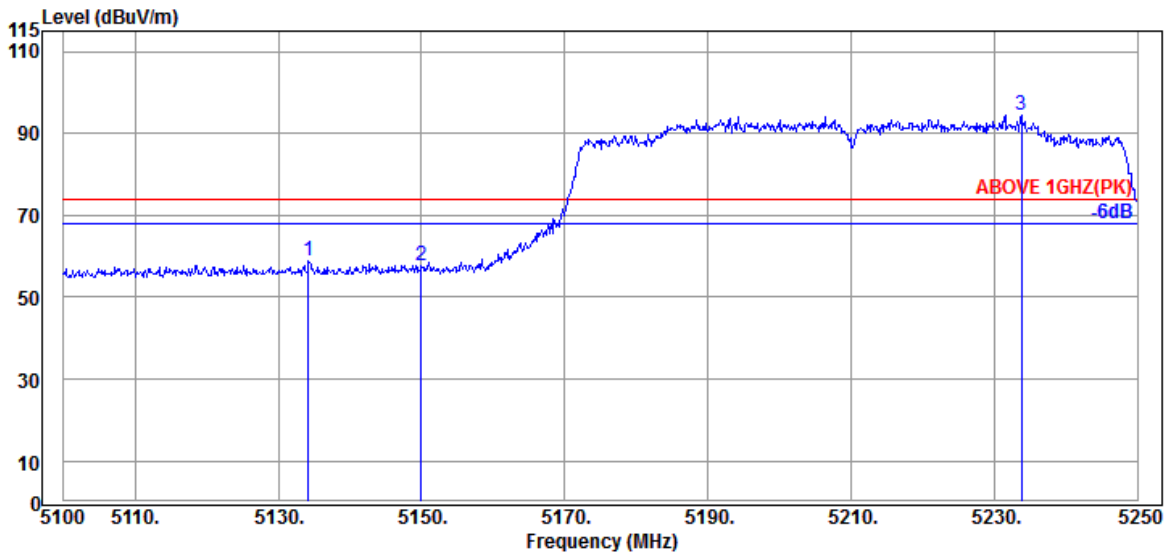

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.200	34.17	10.70	34.36	48.21	58.72	74.00	15.28	Peak
5149.950	34.20	10.70	34.35	47.12	57.67	74.00	16.33	Peak
@ 5233.800	34.35	10.76	34.32	83.81	94.60	---	---	Peak

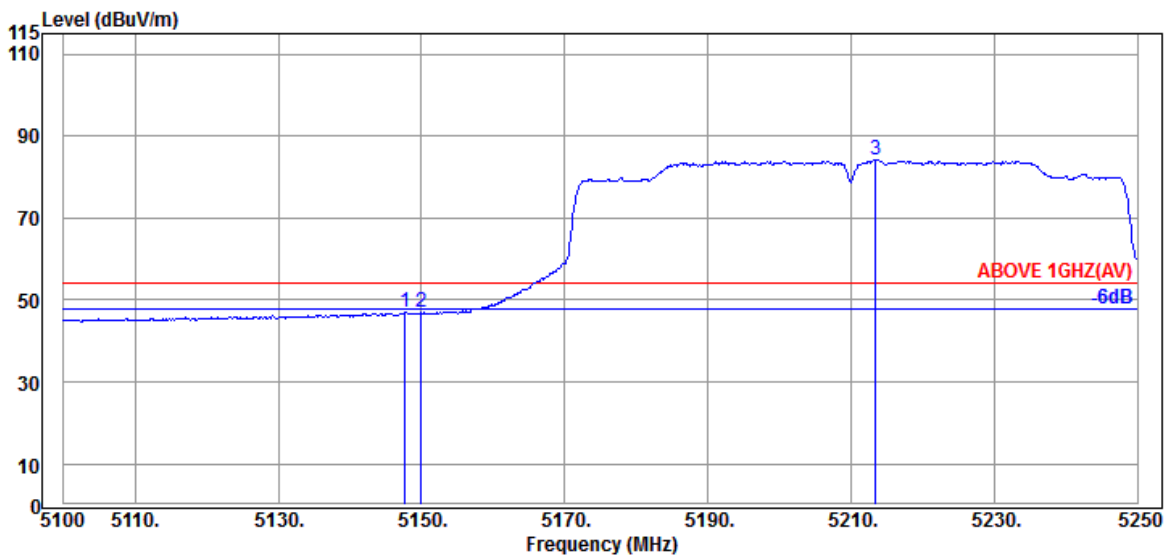


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.700	34.20	10.70	34.35	36.34	46.89	54.00	7.11	Average
5149.950	34.20	10.70	34.35	36.34	46.89	54.00	7.11	Average
@ 5213.400	34.25	10.74	34.33	73.50	84.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

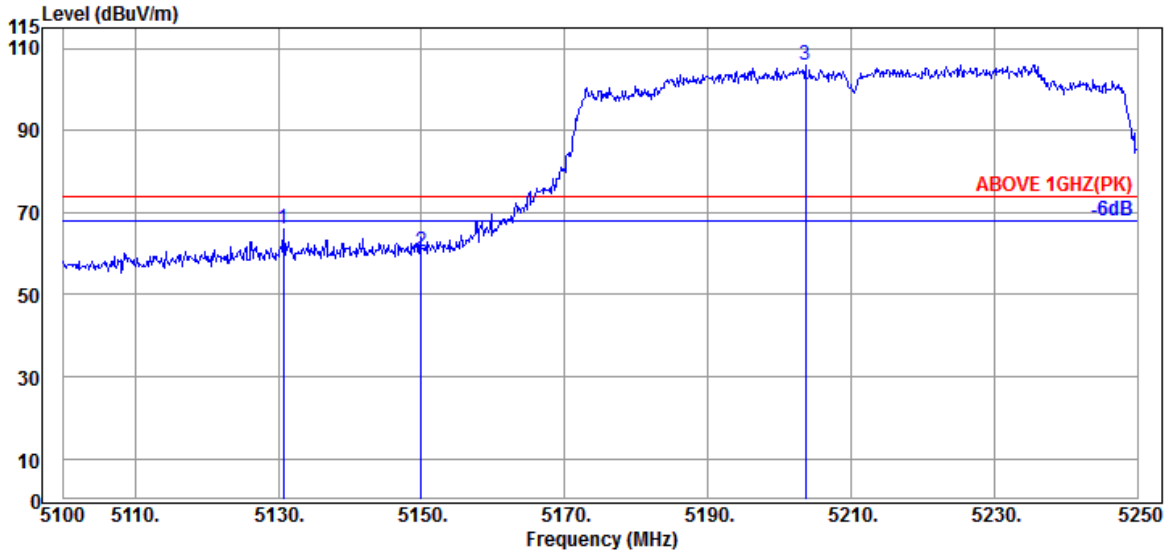

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.750	34.17	10.70	34.36	55.48	65.99	74.00	8.01	Peak
5149.950	34.20	10.70	34.35	50.01	60.56	74.00	13.44	Peak
@ 5203.650	34.25	10.74	34.33	95.43	106.09	---	---	Peak

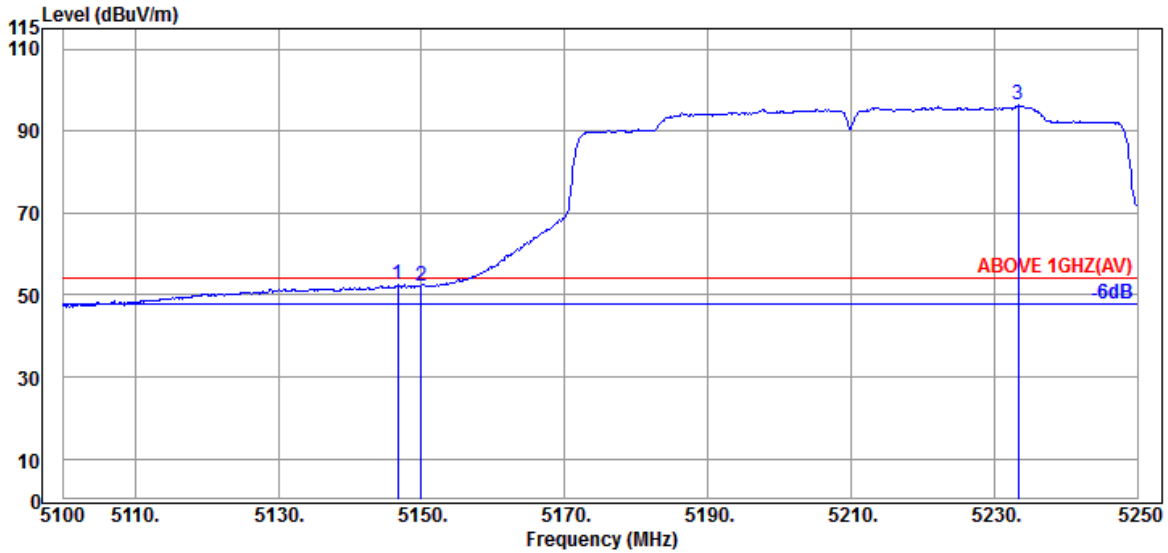


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.650	34.20	10.70	34.35	42.04	52.59	54.00	1.41	Average
5149.950	34.20	10.70	34.35	41.72	52.27	54.00	1.73	Average
@ 5233.350	34.35	10.76	34.32	85.48	96.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

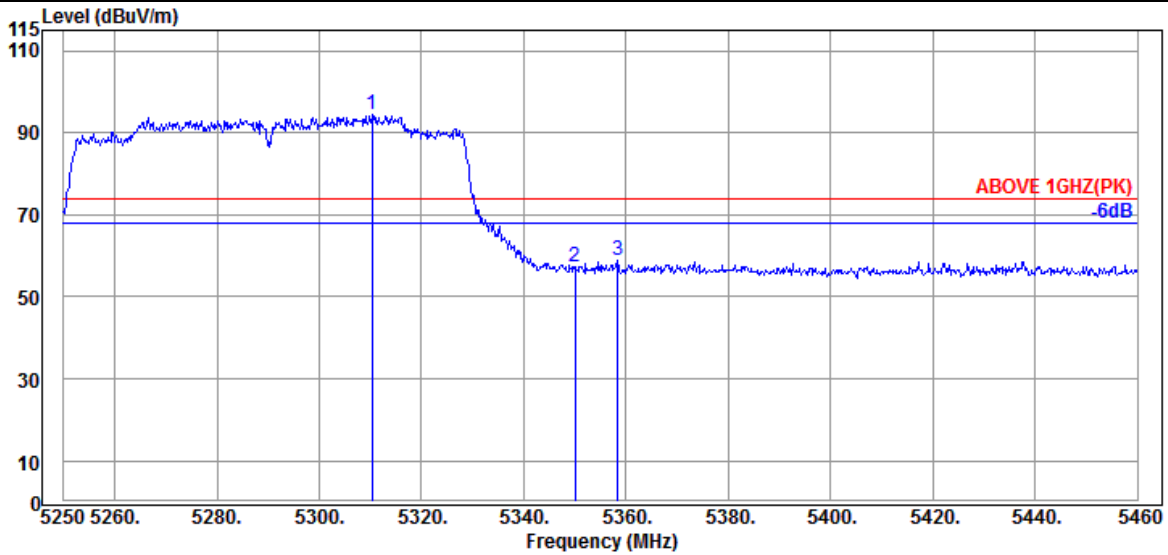

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.270	34.53	10.81	34.29	83.21	94.26	---	---	Peak
5349.960	34.60	10.83	34.27	46.23	57.39	74.00	16.61	Peak
5358.360	34.63	10.85	34.27	47.59	58.80	74.00	15.20	Peak

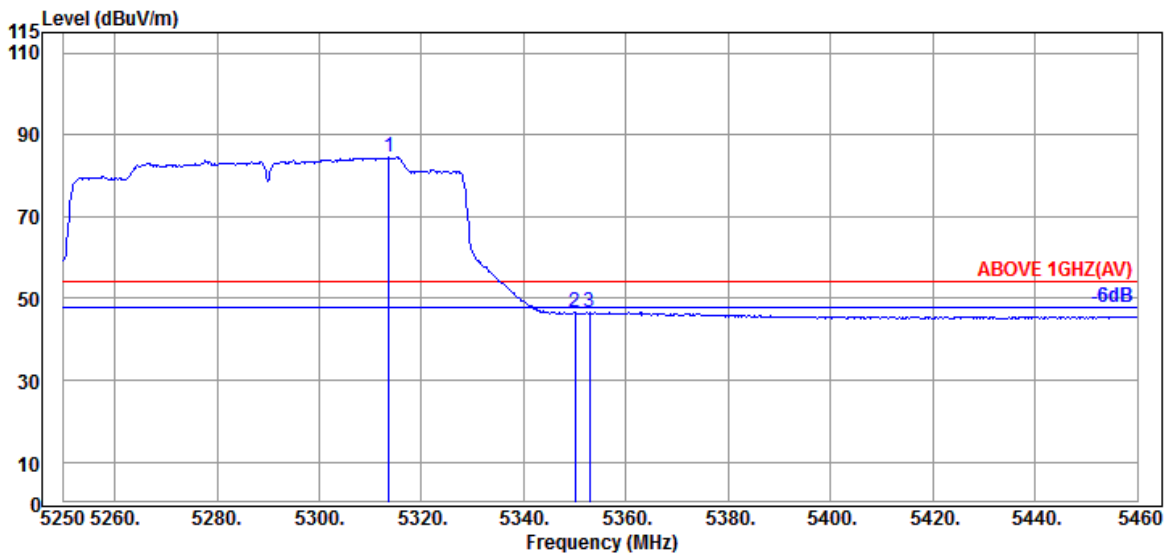


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.630	34.53	10.81	34.29	73.60	84.65	---	---	Average
5349.960	34.60	10.83	34.27	35.46	46.62	54.00	7.38	Average
5352.900	34.60	10.83	34.27	35.41	46.57	54.00	7.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

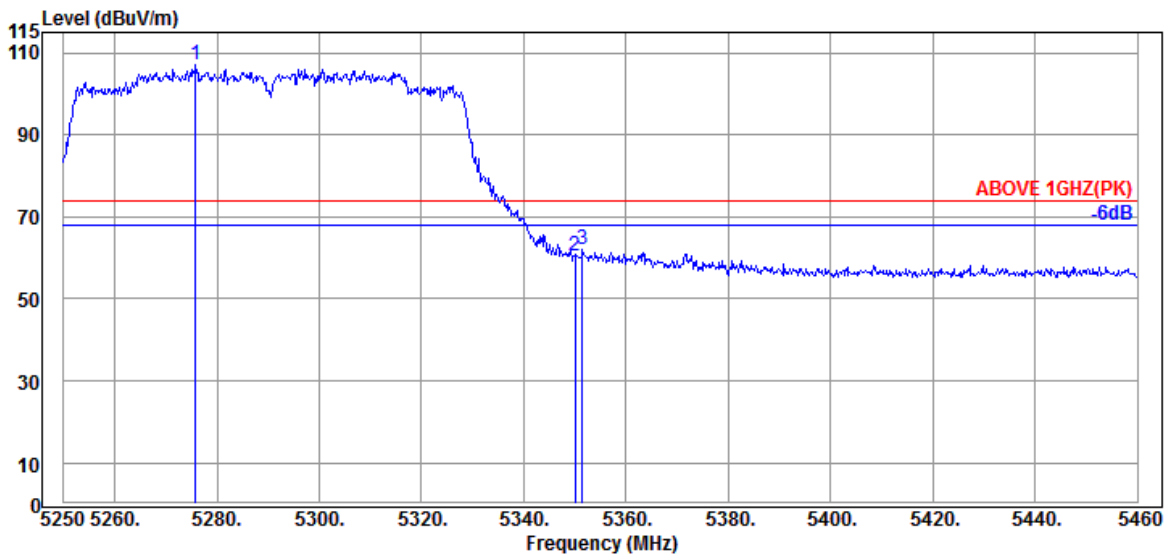

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.830	34.43	10.79	34.30	96.11	107.03	---	---	Peak
5349.960	34.60	10.83	34.27	49.27	60.43	74.00	13.57	Peak
5351.430	34.60	10.83	34.27	50.78	61.94	74.00	12.06	Peak

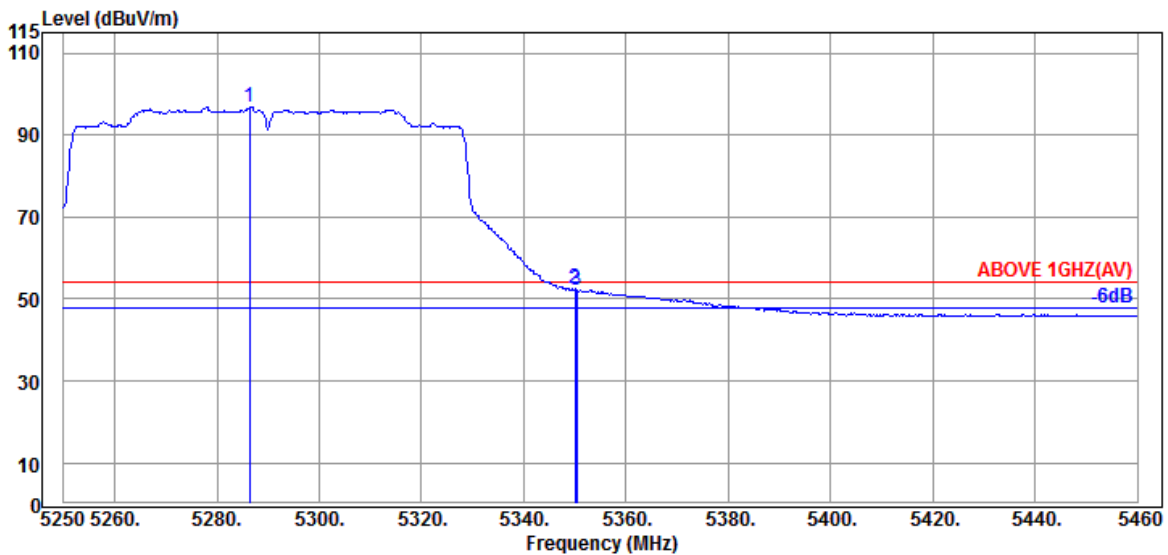


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.330	34.47	10.79	34.30	85.83	96.79	---	---	Average
5349.960	34.60	10.83	34.27	41.24	52.40	54.00	1.60	Average
5350.380	34.60	10.83	34.27	40.95	52.11	54.00	1.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

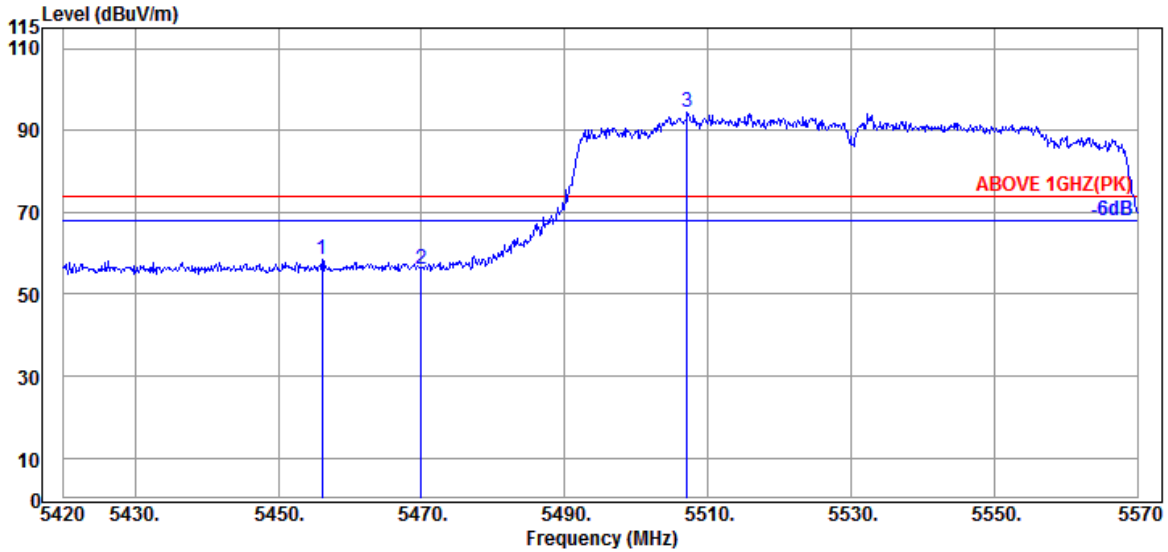

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.150	34.50	10.89	34.24	47.25	58.40	74.00	15.60	Peak
5469.950	34.47	10.91	34.24	45.10	56.24	74.00	17.76	Peak
@ 5507.150	34.40	10.93	34.24	83.24	94.33	---	---	Peak

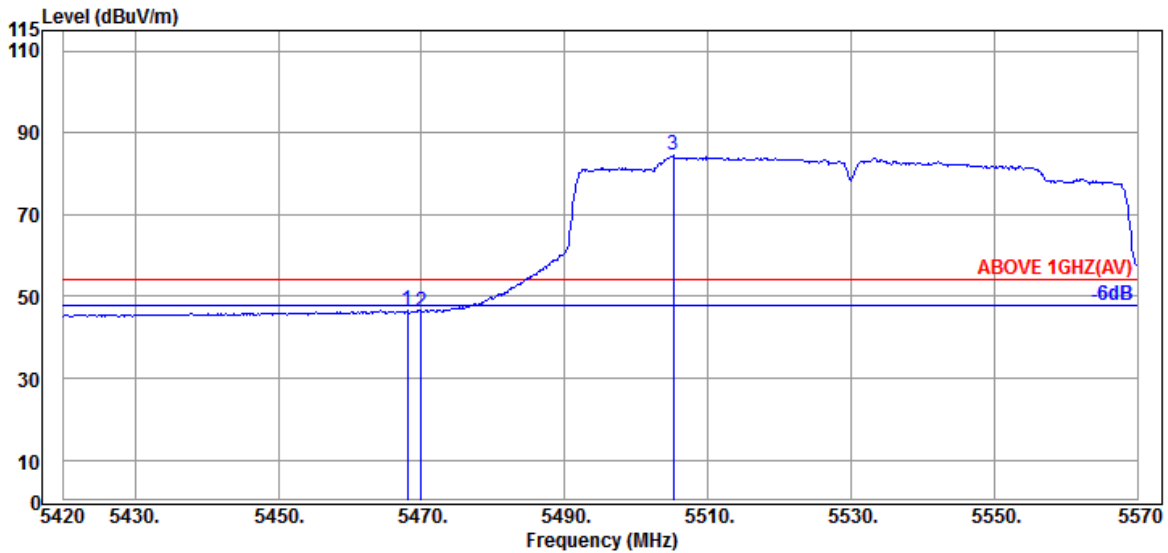


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.47	10.91	34.24	35.34	46.48	54.00	7.52	Average
5469.950	34.47	10.91	34.24	35.21	46.35	54.00	7.65	Average
@ 5505.200	34.40	10.93	34.24	73.32	84.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

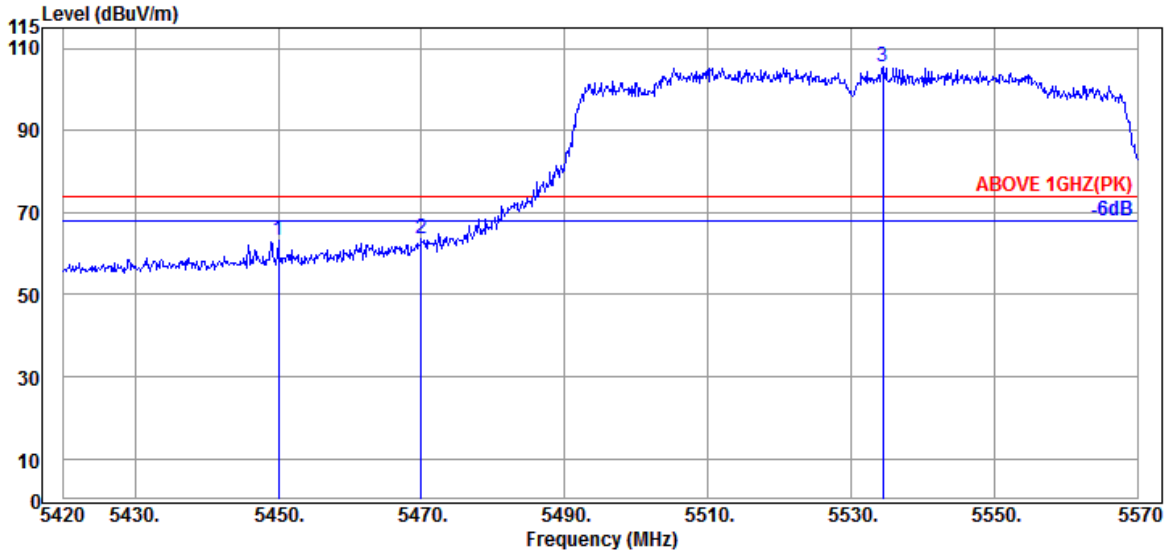

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.000	34.50	10.89	34.24	52.12	63.27	74.00	10.73	Peak
5469.950	34.47	10.91	34.24	52.48	63.62	74.00	10.38	Peak
@ 5534.450	34.33	10.95	34.25	94.67	105.70	---	---	Peak

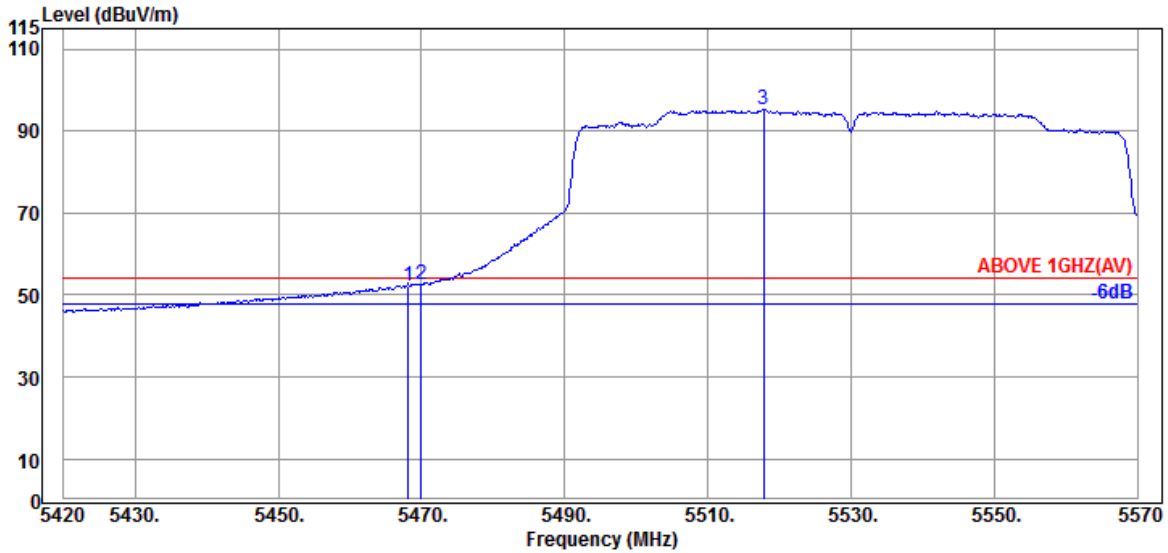


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.150	34.47	10.91	34.24	41.21	52.35	54.00	1.65	Average
5469.950	34.47	10.91	34.24	41.34	52.48	54.00	1.52	Average
@ 5517.800	34.37	10.93	34.24	84.32	95.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

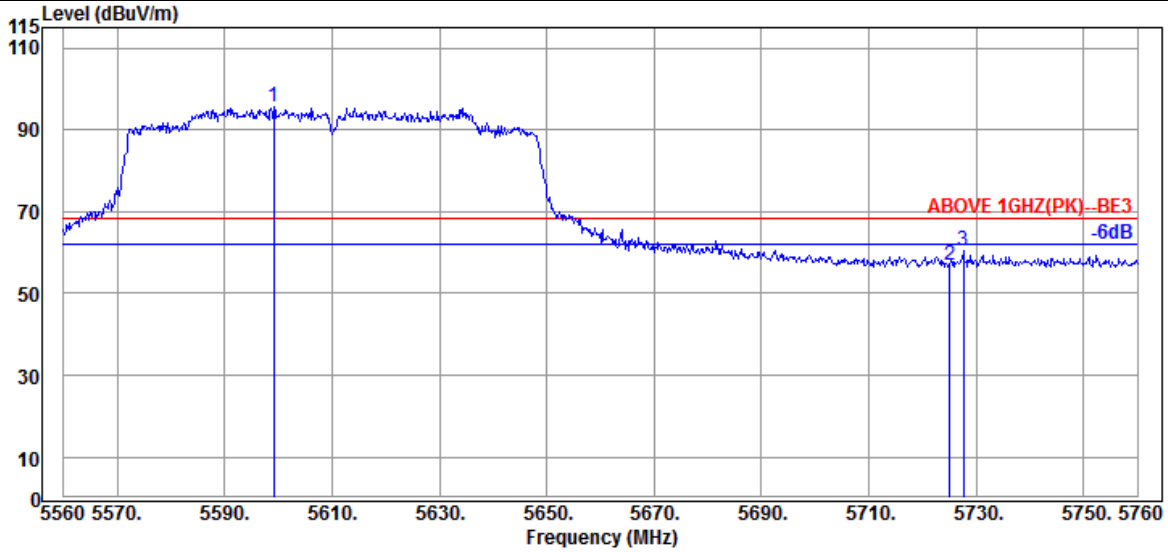

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5599.200	34.40	10.97	34.27	84.58	95.68	---	---	Peak
5725.000	34.67	11.05	34.32	45.60	57.00	68.20	11.20	Peak
5727.600	34.67	11.05	34.32	48.91	60.31	68.20	7.89	Peak

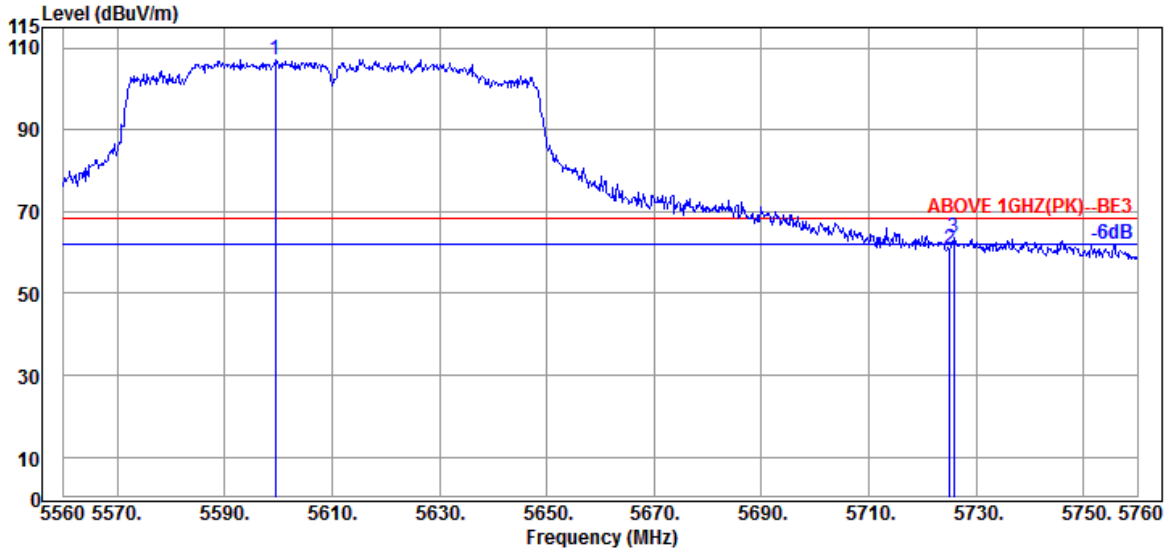


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5599.400	34.40	10.97	34.27	96.05	107.15	---	---	Peak
5725.000	34.67	11.05	34.32	49.50	60.90	68.20	7.30	Peak
5725.800	34.67	11.05	34.32	52.36	63.76	68.20	4.44	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

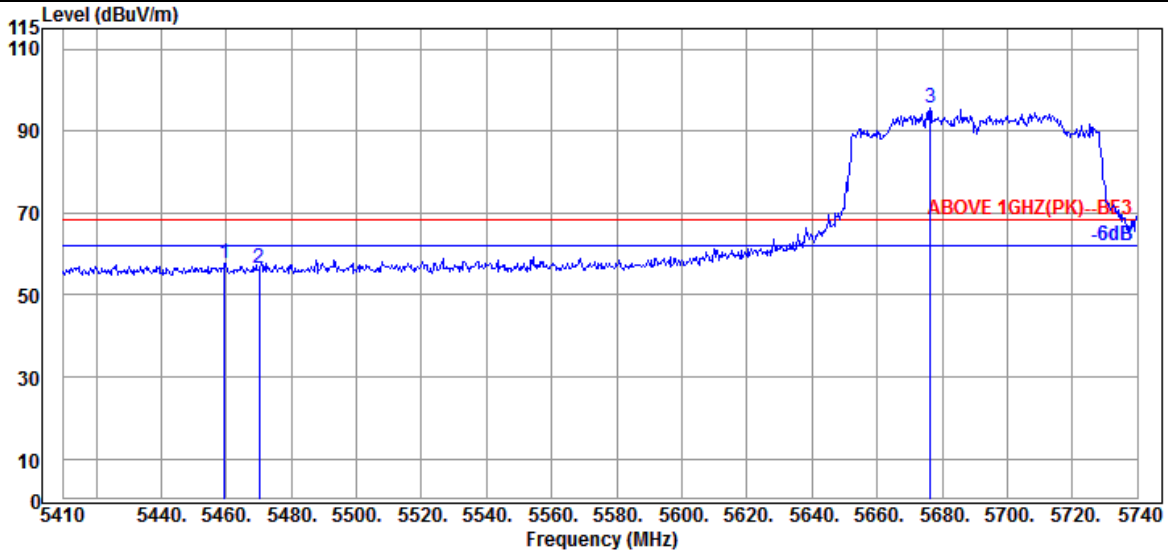

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.500	34.50	10.91	34.24	46.56	57.73	68.20	10.47	Peak
5470.060	34.47	10.91	34.24	45.40	56.54	68.20	11.66	Peak
@ 5676.310	34.40	11.03	34.30	84.41	95.54	---	---	Peak

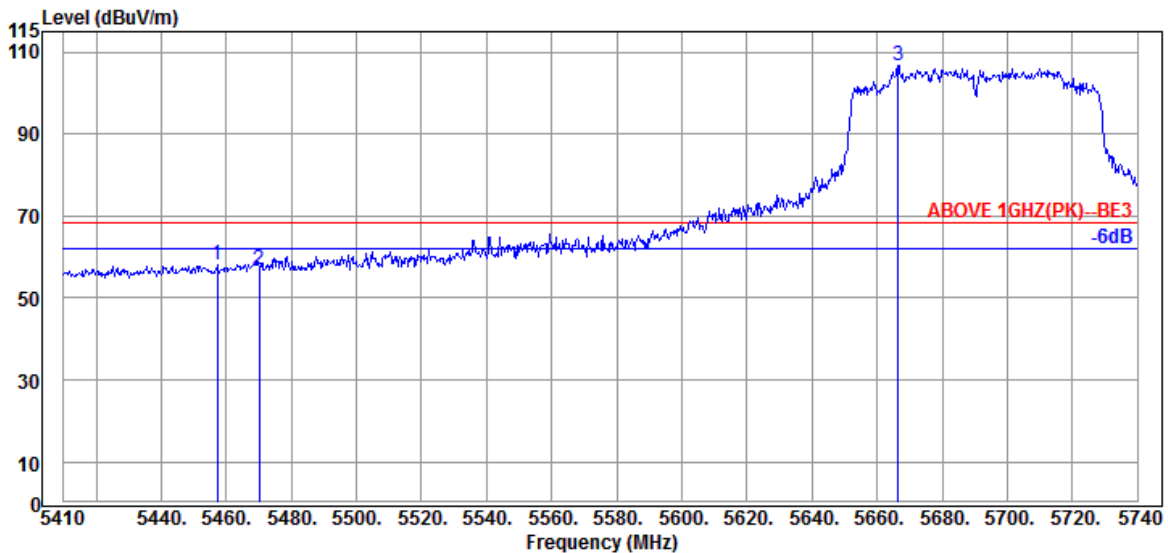


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.190	34.50	10.89	34.24	47.10	58.25	68.20	9.95	Peak
5470.060	34.47	10.91	34.24	45.84	56.98	68.20	11.22	Peak
@ 5666.410	34.40	11.01	34.30	95.69	106.80	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

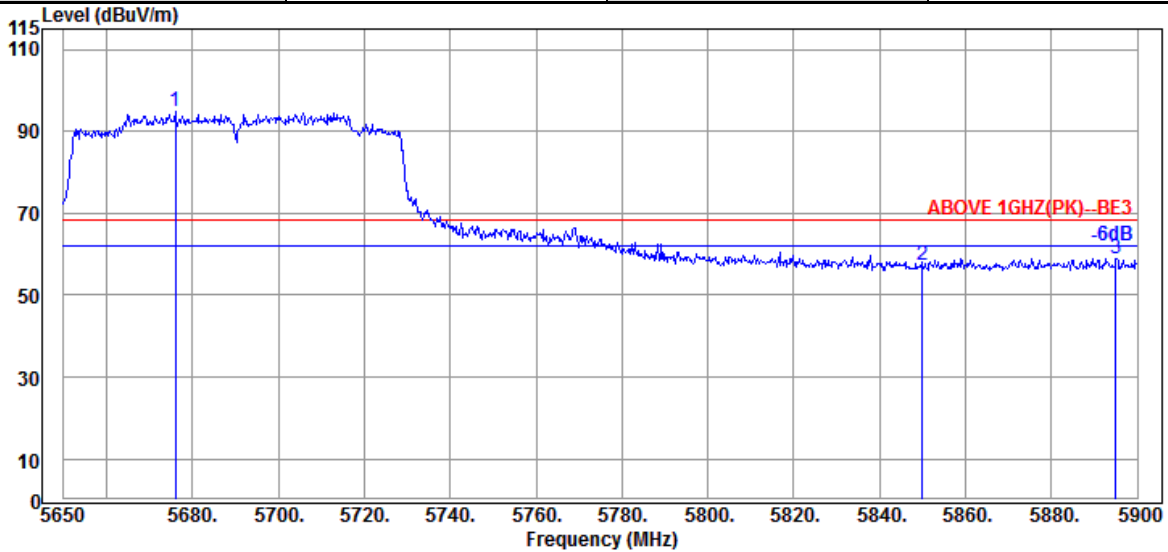

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.000	34.40	11.03	34.30	83.55	94.68	---	---	Peak
5850.000	35.10	11.10	34.38	45.59	57.41	68.20	10.79	Peak
5895.000	35.40	11.12	34.40	46.92	59.04	68.20	9.16	Peak

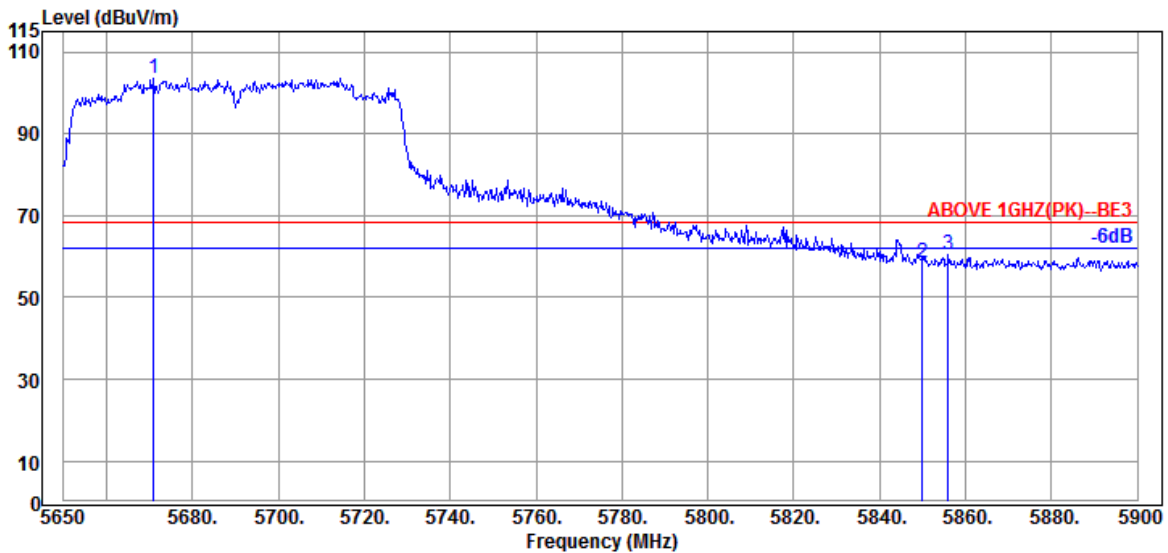


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5671.000	34.40	11.01	34.30	92.38	103.49	---	---	Peak
5850.000	35.10	11.10	34.38	46.55	58.37	68.20	9.83	Peak
5856.000	35.20	11.10	34.38	48.45	60.37	68.20	7.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

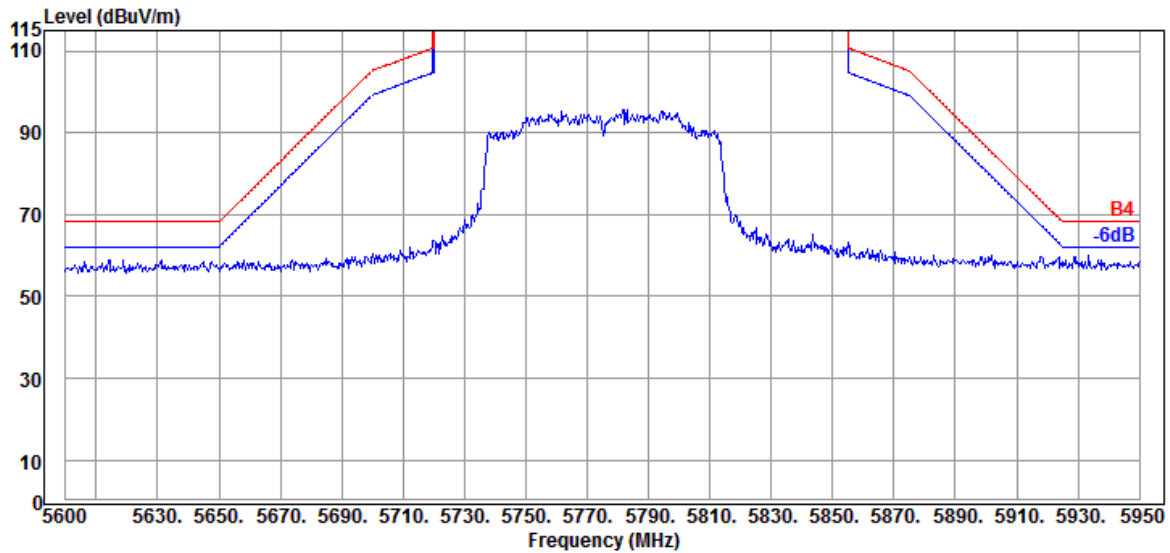

Antenna at Vertical Polarization

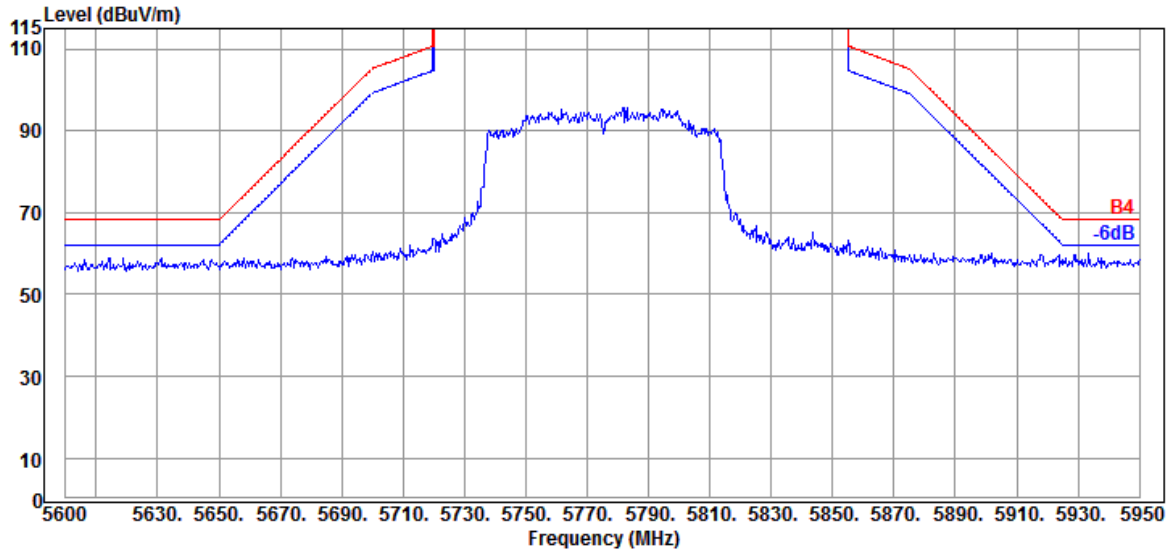


Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

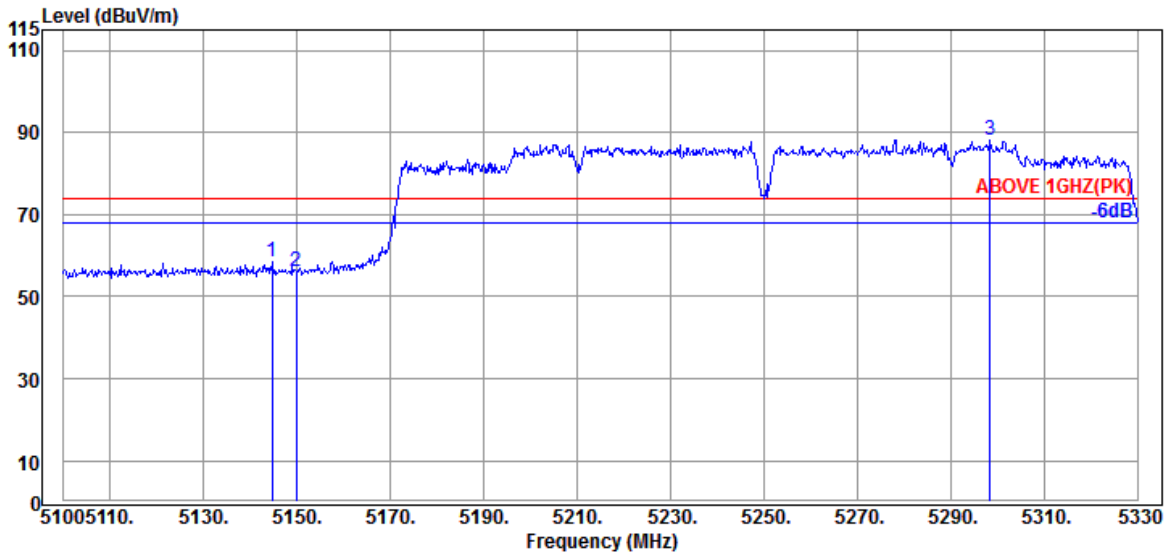

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.620	34.20	10.70	34.35	48.05	58.60	74.00	15.40	Peak
5149.910	34.20	10.70	34.35	45.48	56.03	74.00	17.97	Peak
@ 5298.490	34.50	10.81	34.29	77.00	88.02	---	---	Peak

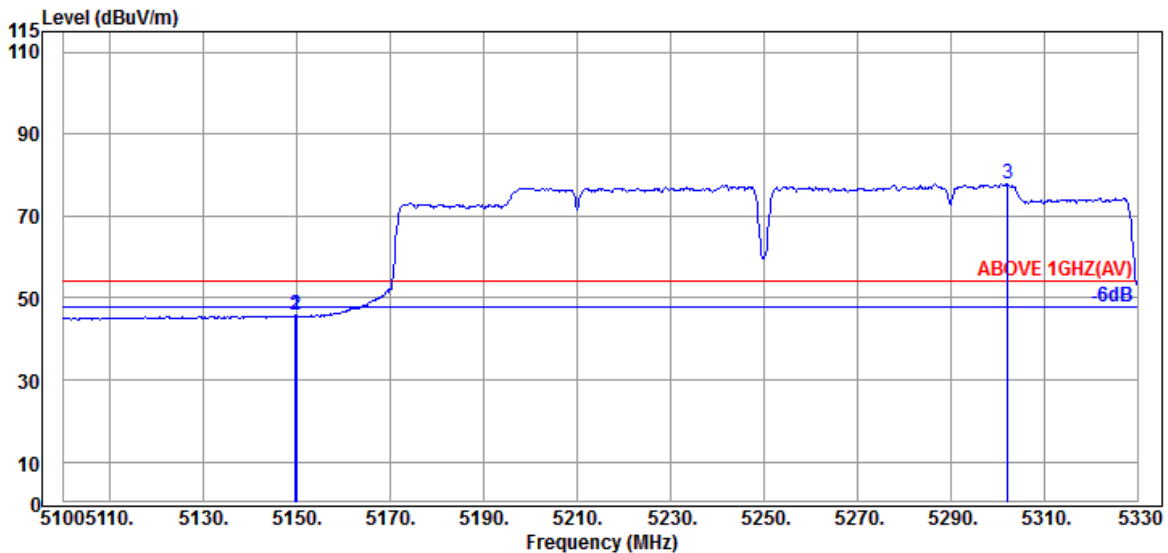


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.20	10.70	34.35	35.16	45.71	54.00	8.29	Average
5149.910	34.20	10.70	34.35	35.17	45.72	54.00	8.28	Average
@ 5302.170	34.50	10.81	34.29	66.93	77.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

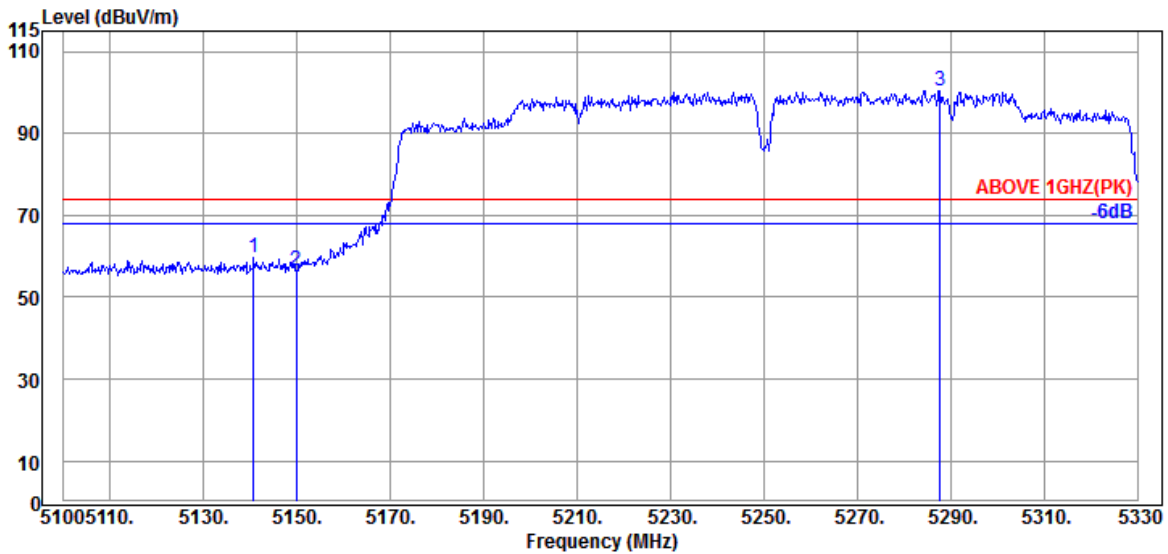

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.710	34.17	10.70	34.36	49.26	59.77	74.00	14.23	Peak
5149.910	34.20	10.70	34.35	46.00	56.55	74.00	17.45	Peak
@ 5287.680	34.47	10.81	34.30	89.43	100.41	---	---	Peak

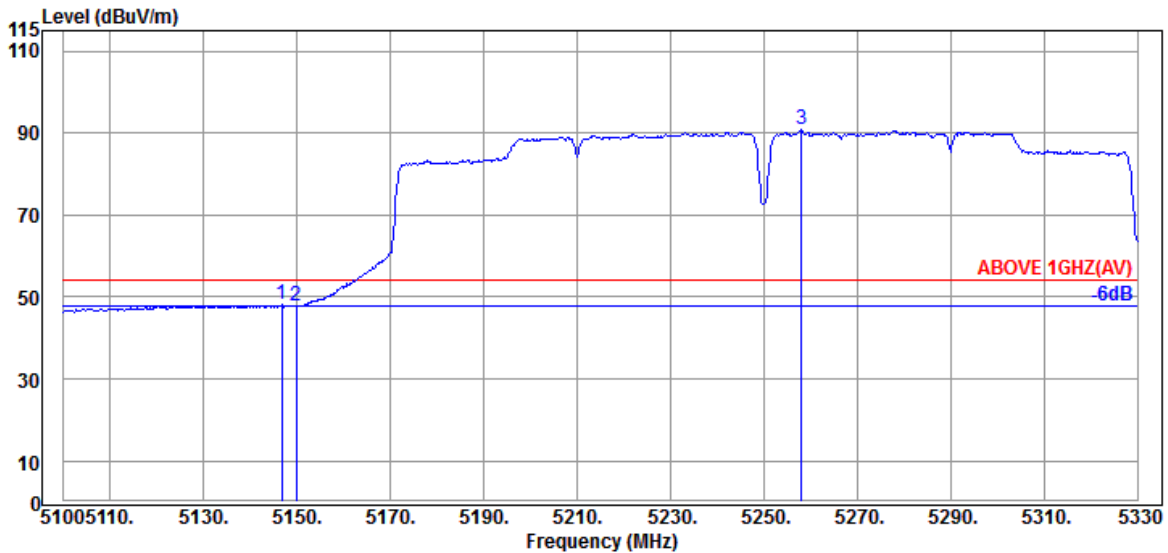


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.690	34.20	10.70	34.35	37.55	48.10	54.00	5.90	Average
5149.910	34.20	10.70	34.35	37.18	47.73	54.00	6.27	Average
@ 5258.010	34.40	10.79	34.31	79.90	90.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

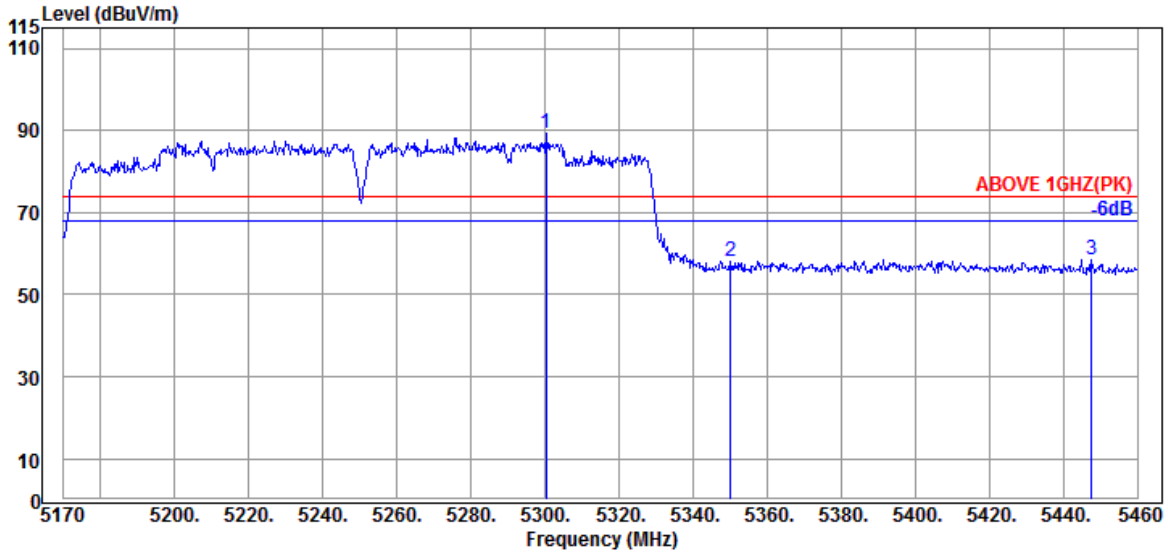

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.210	34.50	10.81	34.29	78.24	89.26	---	---	Peak
5350.090	34.60	10.83	34.27	46.95	58.11	74.00	15.89	Peak
5447.530	34.55	10.89	34.25	47.43	58.62	74.00	15.38	Peak

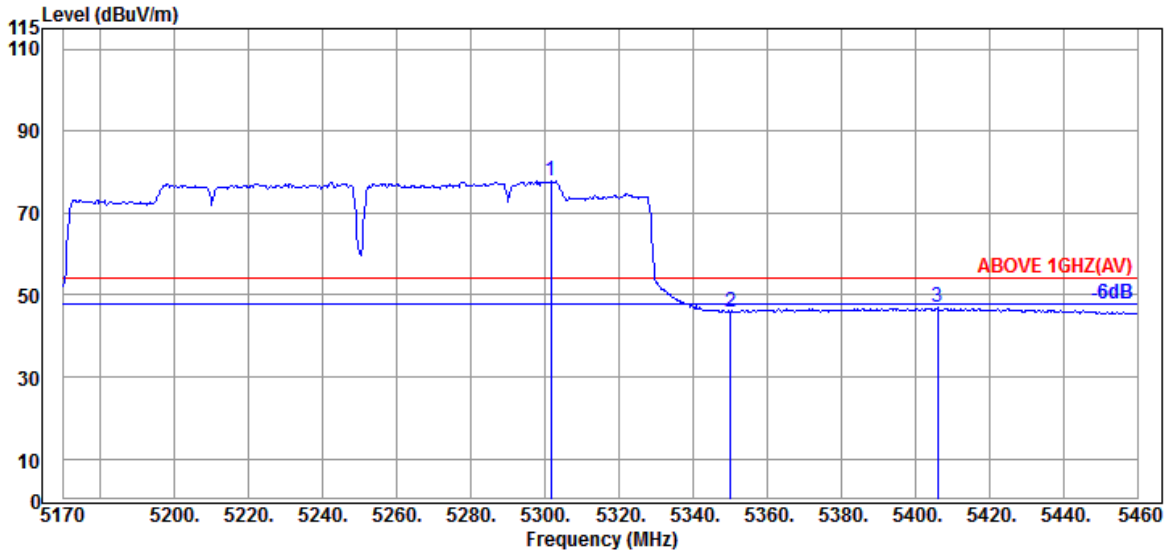


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.660	34.50	10.81	34.29	66.77	77.79	---	---	Average
5350.090	34.60	10.83	34.27	34.69	45.85	54.00	8.15	Average
5406.060	34.65	10.87	34.26	35.68	46.94	54.00	7.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

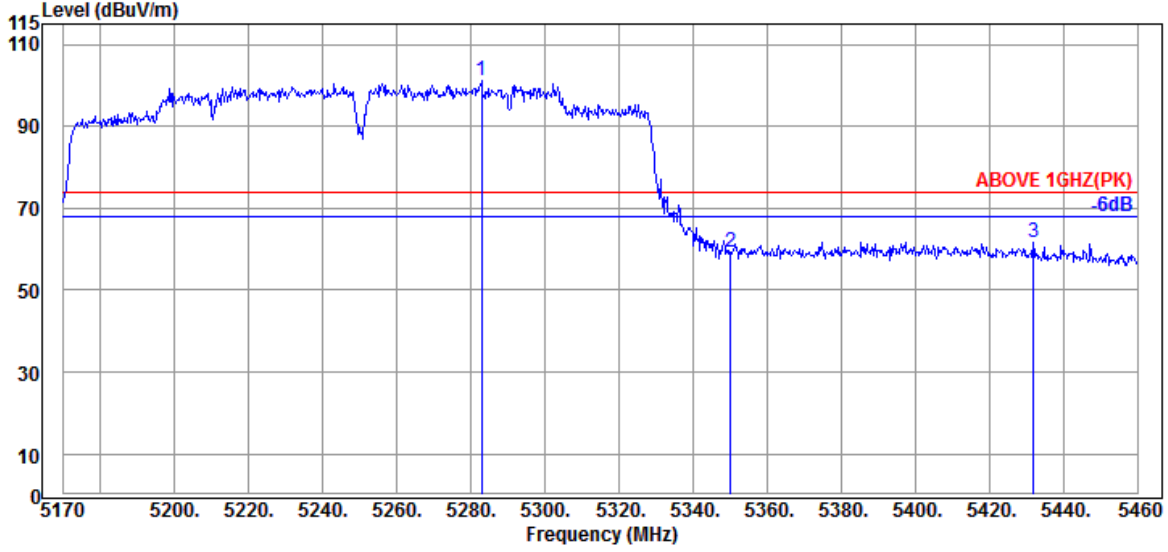

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.810	34.47	10.79	34.30	90.17	101.13	---	---	Peak
5350.090	34.60	10.83	34.27	47.96	59.12	74.00	14.88	Peak
5431.870	34.60	10.89	34.25	50.55	61.79	74.00	12.21	Peak

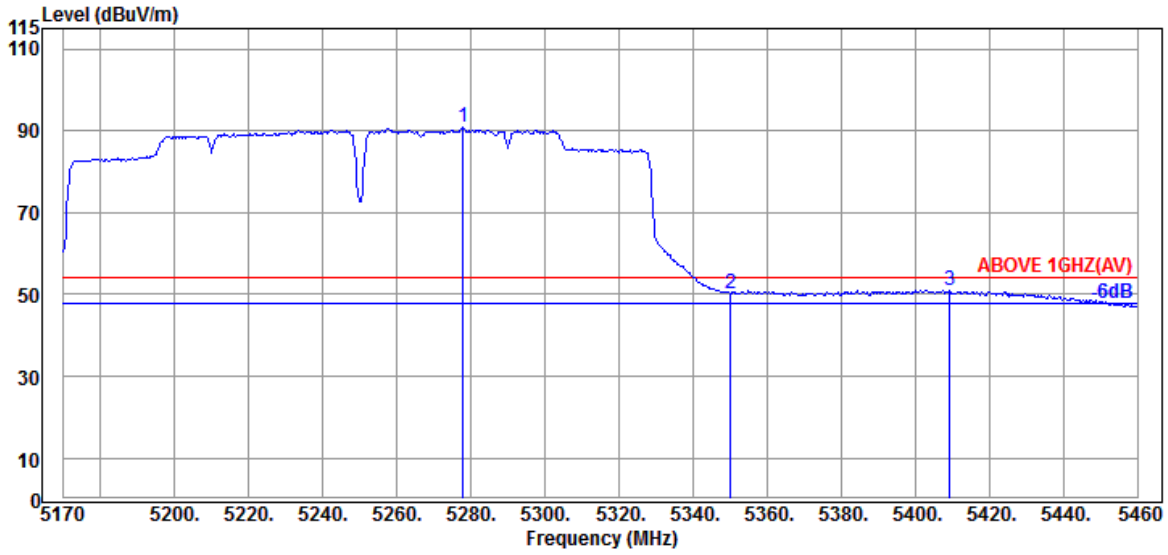


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.880	34.47	10.79	34.30	79.76	90.72	---	---	Average
5350.090	34.60	10.83	34.27	39.16	50.32	54.00	3.68	Average
5409.250	34.65	10.87	34.26	39.79	51.05	54.00	2.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

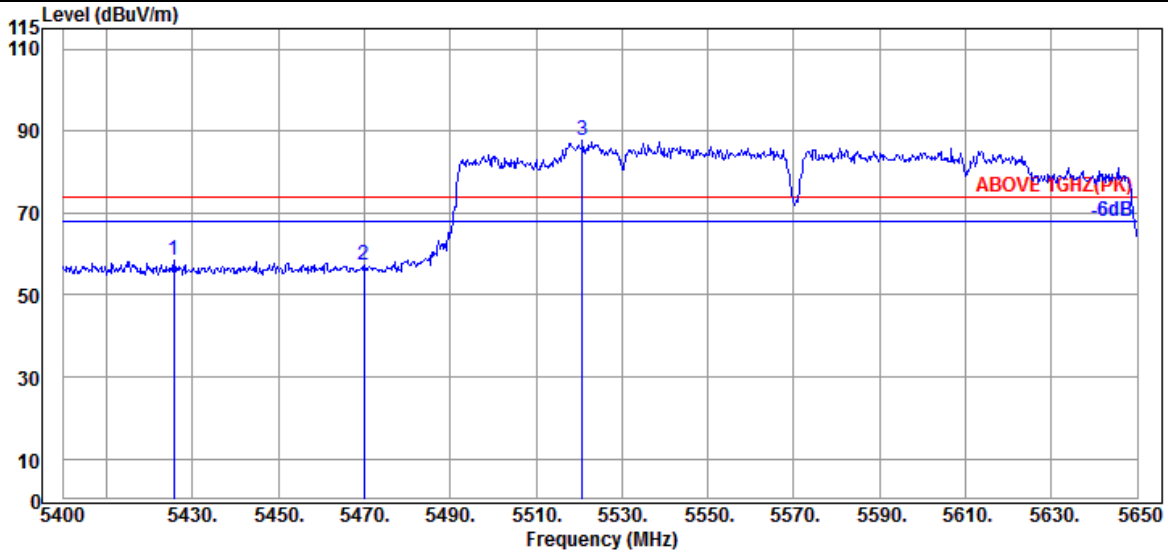

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.750	34.60	10.89	34.25	47.40	58.64	74.00	15.36	Peak
5470.000	34.47	10.91	34.24	46.31	57.45	74.00	16.55	Peak
@ 5520.750	34.37	10.93	34.24	76.51	87.57	---	---	Peak

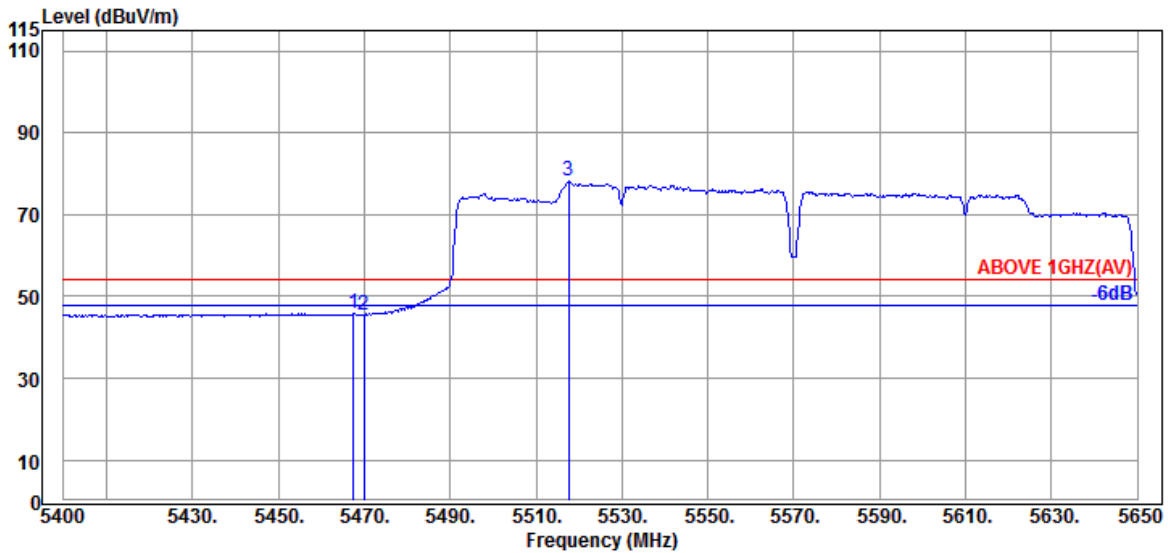


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.47	10.91	34.24	34.65	45.79	54.00	8.21	Average
5470.000	34.47	10.91	34.24	34.40	45.54	54.00	8.46	Average
@ 5517.500	34.37	10.93	34.24	67.13	78.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

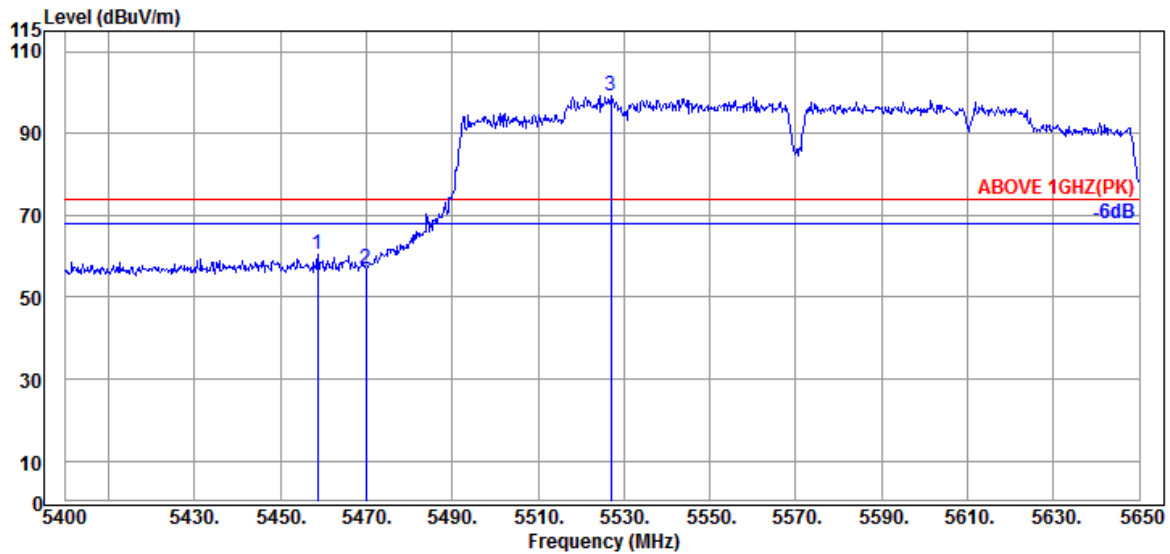

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.750	34.50	10.89	34.24	49.34	60.49	74.00	13.51	Peak
5470.000	34.47	10.91	34.24	45.87	57.01	74.00	16.99	Peak
@ 5527.000	34.37	10.93	34.25	88.26	99.31	---	---	Peak

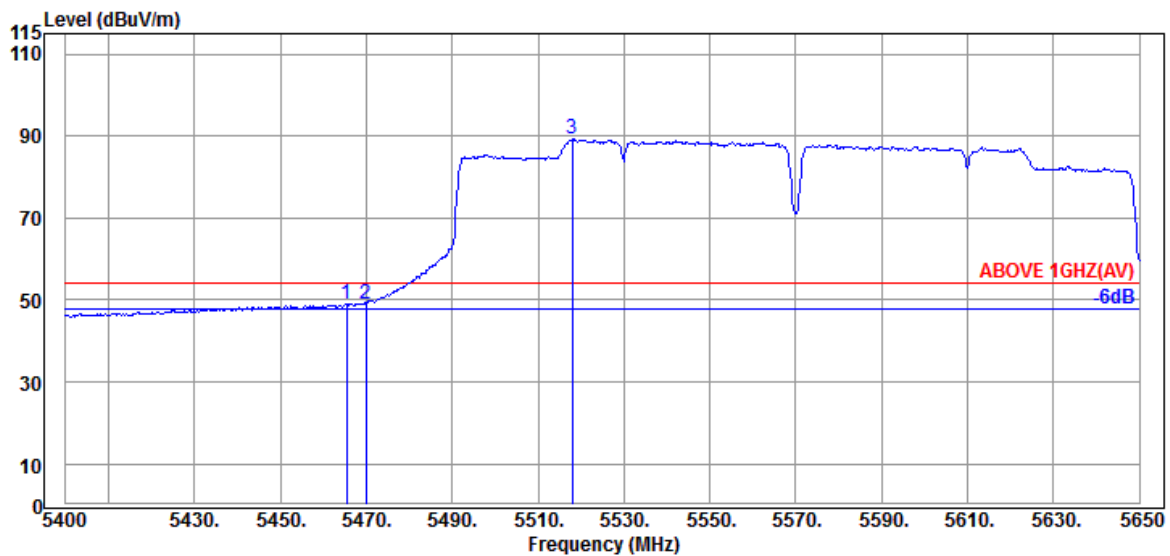


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.47	10.91	34.24	38.00	49.14	54.00	4.86	Average
5470.000	34.47	10.91	34.24	37.95	49.09	54.00	4.91	Average
@ 5518.000	34.37	10.93	34.24	78.08	89.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

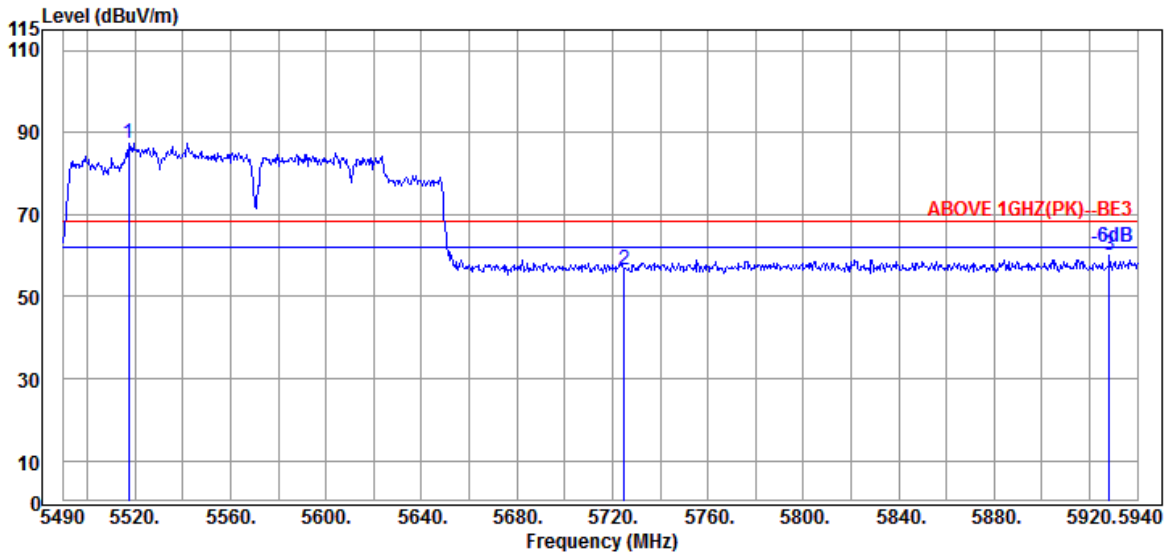

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5517.450	34.37	10.93	34.24	76.22	87.28	---	---	Peak
5724.900	34.67	11.05	34.32	45.27	56.67	68.20	11.53	Peak
5928.300	35.33	11.14	34.41	48.08	60.14	68.20	8.06	Peak

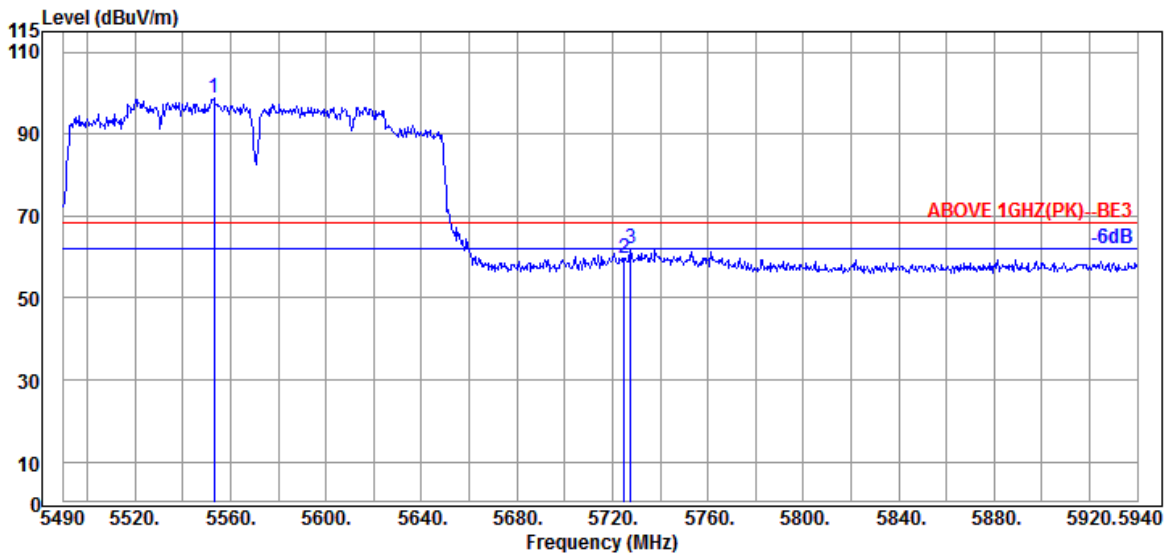


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5553.000	34.30	10.95	34.26	87.66	98.65	---	---	Peak
5724.900	34.67	11.05	34.32	48.22	59.62	68.20	8.58	Peak
5727.600	34.67	11.05	34.32	50.72	62.12	68.20	6.08	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

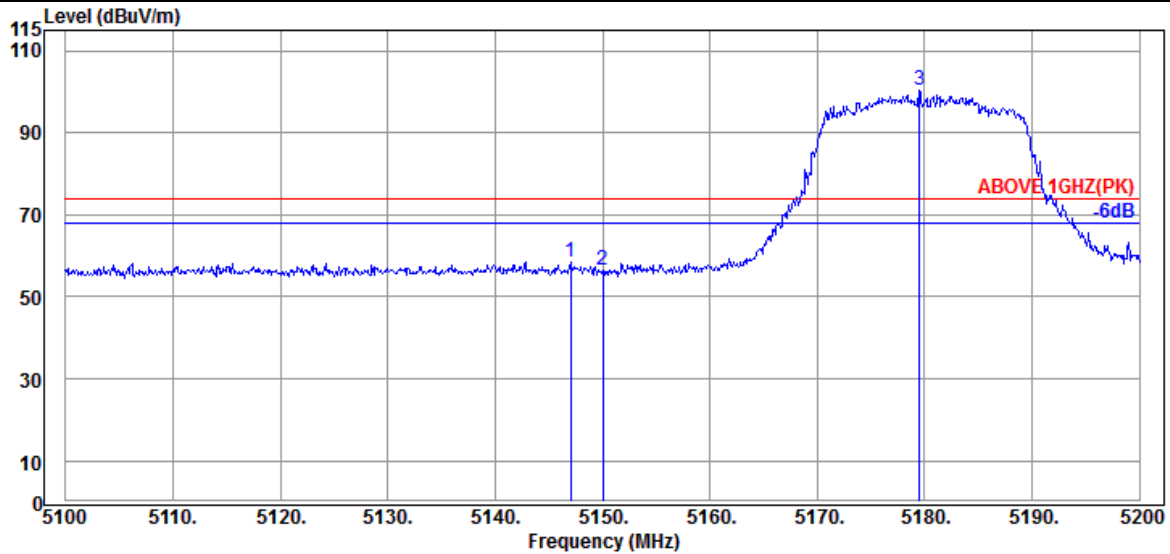

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	34.20	10.70	34.35	48.09	58.64	74.00	15.36	Peak
5150.000	34.20	10.70	34.35	45.80	56.35	74.00	17.65	Peak
@ 5179.500	34.20	10.72	34.34	89.73	100.31	---	---	Peak

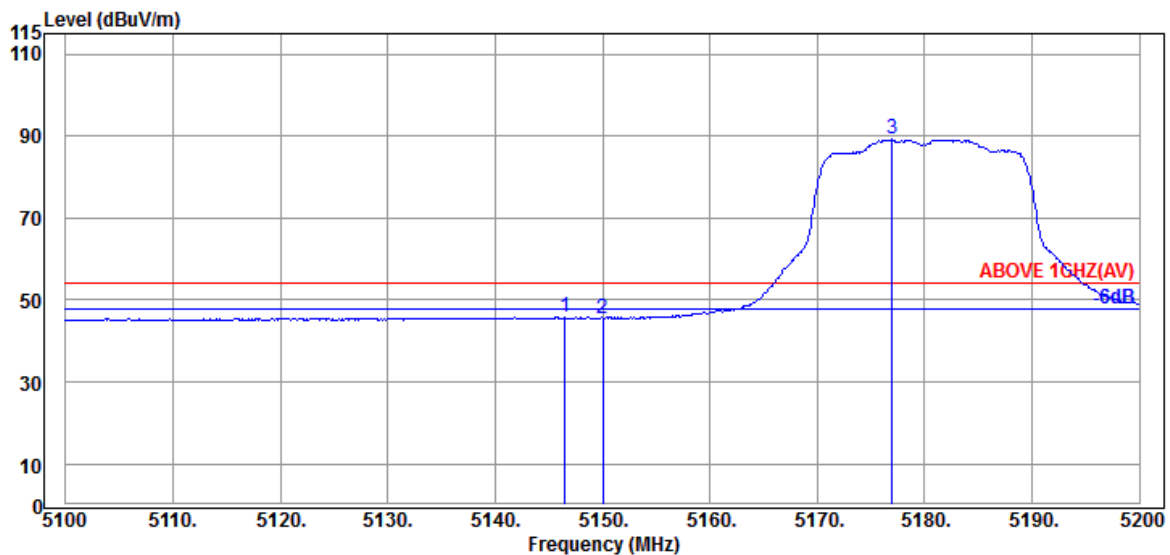


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	34.20	10.70	34.35	35.21	45.76	54.00	8.24	Average
5150.000	34.20	10.70	34.35	35.06	45.61	54.00	8.39	Average
@ 5177.000	34.20	10.72	34.34	78.55	89.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

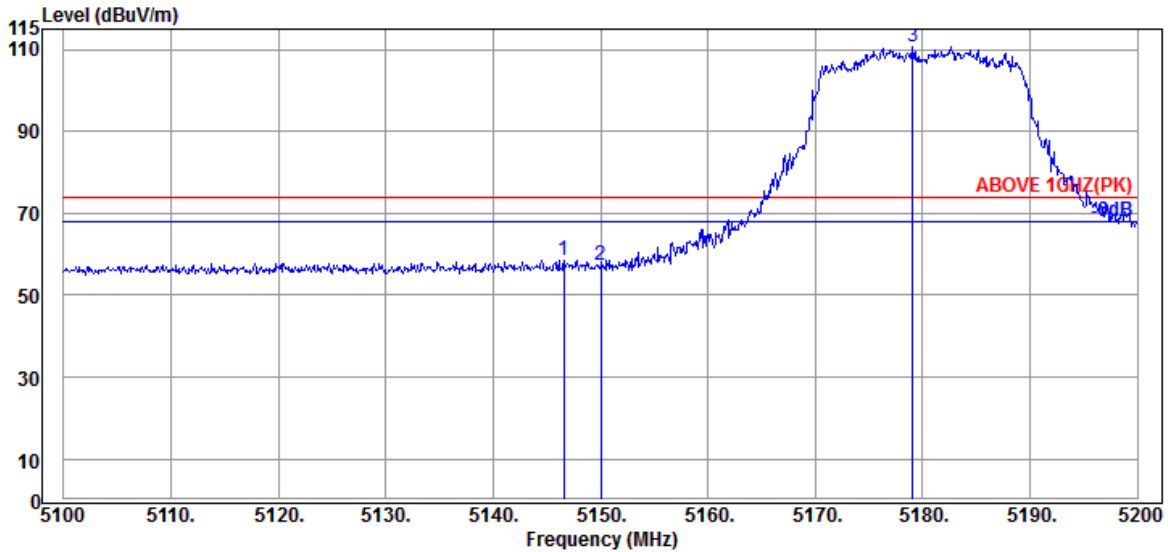

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	34.20	10.70	34.35	47.95	58.50	74.00	15.50	Peak
5150.000	34.20	10.70	34.35	46.64	57.19	74.00	16.81	Peak
@ 5179.100	34.20	10.72	34.34	100.27	110.85	---	---	Peak

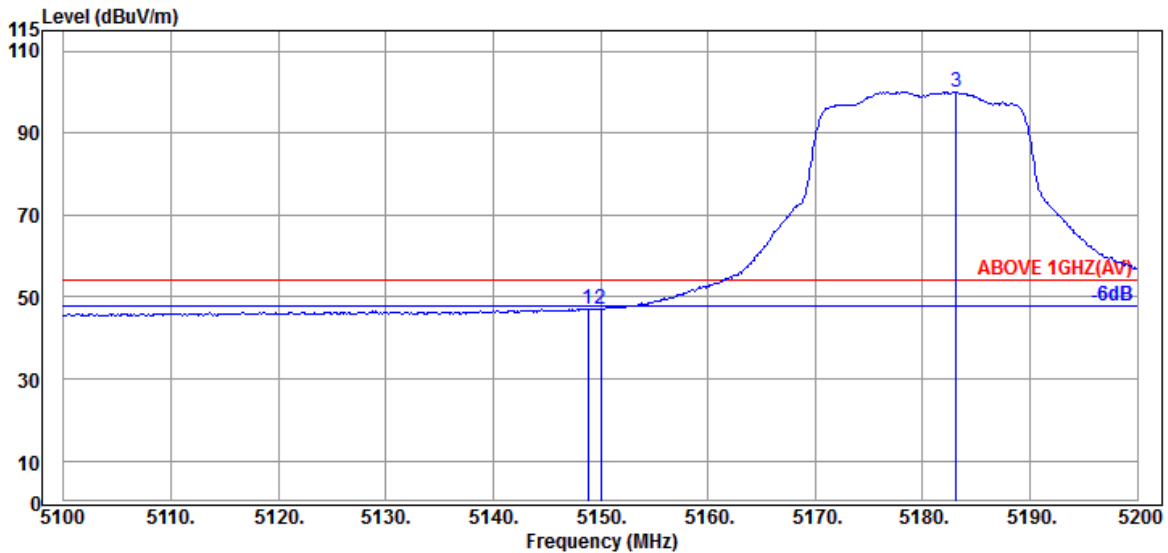


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.20	10.70	34.35	36.53	47.08	54.00	6.92	Average
5150.000	34.20	10.70	34.35	36.39	46.94	54.00	7.06	Average
@ 5183.100	34.20	10.72	34.34	89.52	100.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

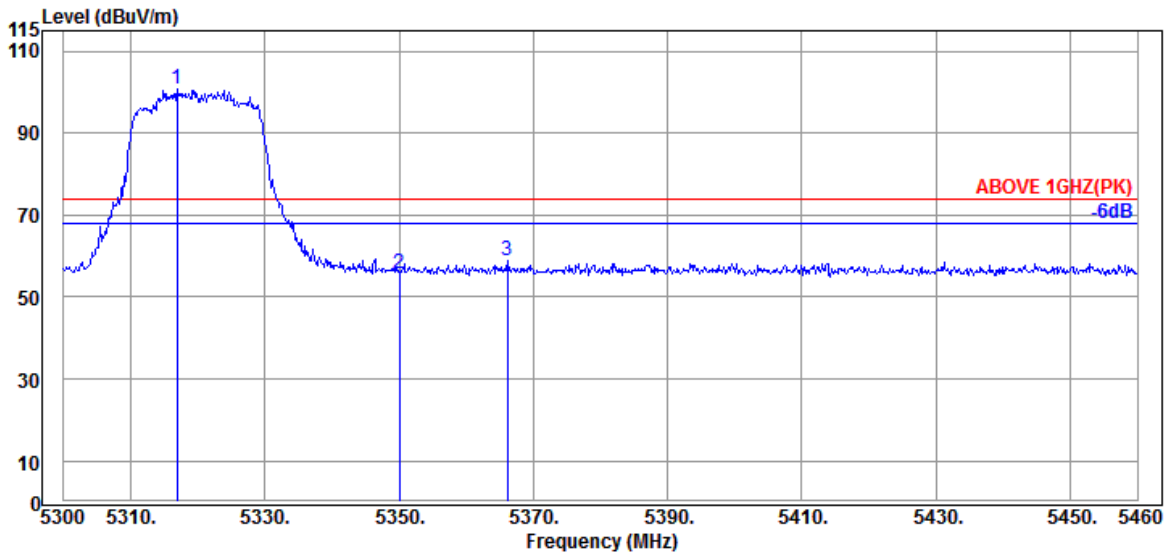

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.960	34.53	10.81	34.29	89.63	100.68	---	---	Peak
5350.080	34.60	10.83	34.27	44.53	55.69	74.00	18.31	Peak
5366.080	34.63	10.85	34.27	47.81	59.02	74.00	14.98	Peak

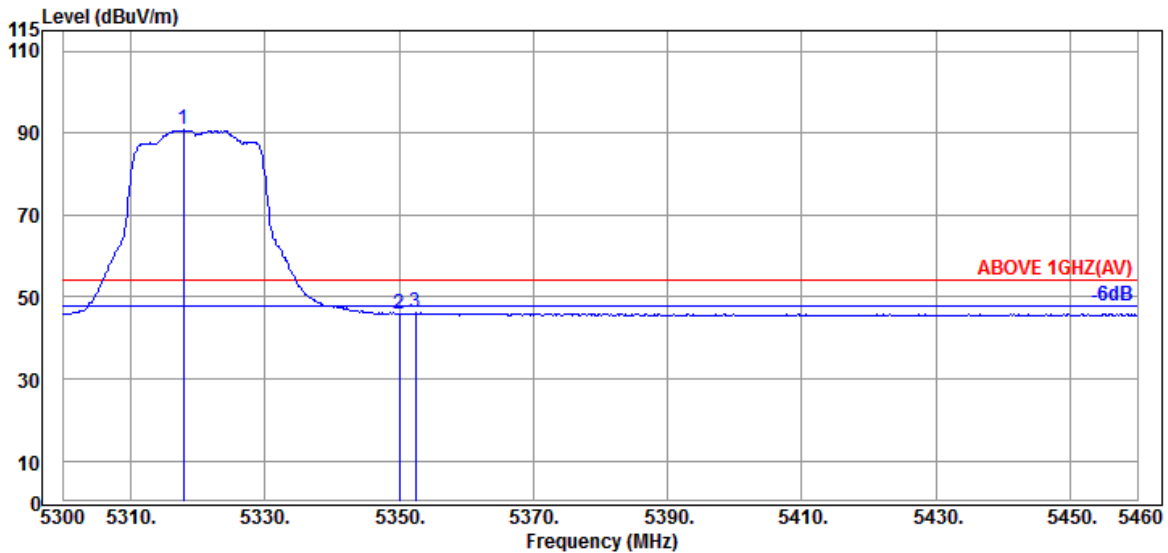


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.920	34.53	10.81	34.29	79.71	90.76	---	---	Average
5350.080	34.60	10.83	34.27	34.72	45.88	54.00	8.12	Average
5352.480	34.60	10.83	34.27	34.90	46.06	54.00	7.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

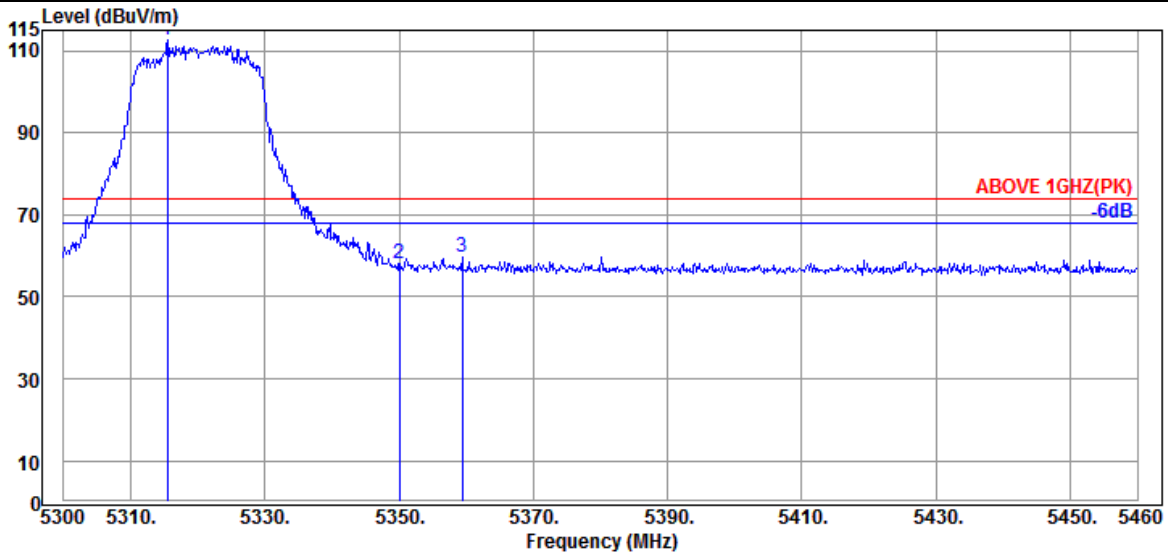

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.520	34.53	10.81	34.29	101.58	112.63	---	---	Peak
5350.080	34.60	10.83	34.27	46.76	57.92	74.00	16.08	Peak
5359.360	34.63	10.85	34.27	48.41	59.62	74.00	14.38	Peak

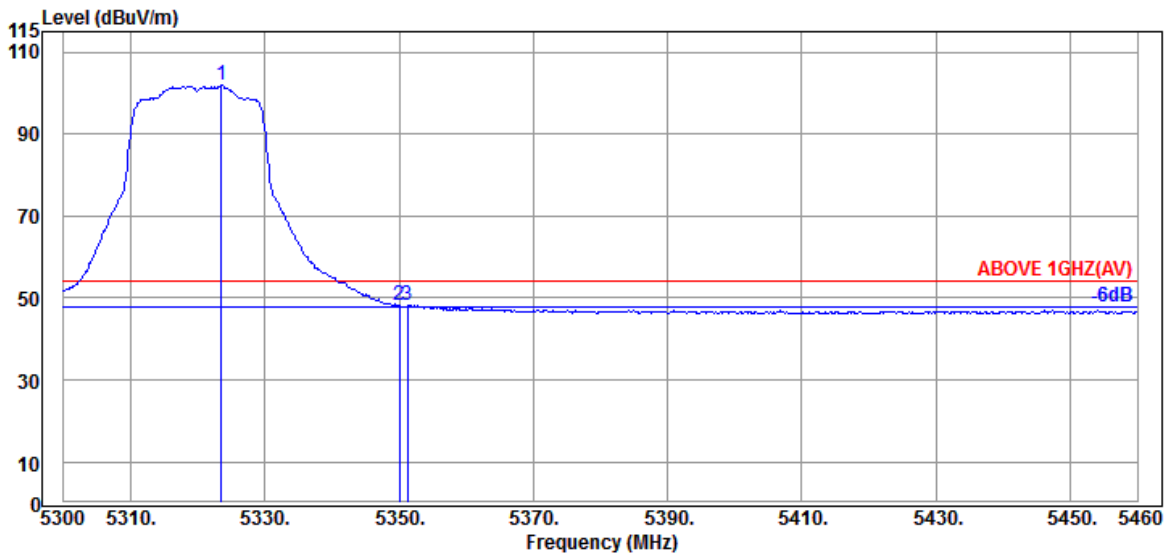


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.520	34.57	10.83	34.28	90.78	101.90	---	---	Average
5350.080	34.60	10.83	34.27	36.86	48.02	54.00	5.98	Average
5351.200	34.60	10.83	34.27	37.07	48.23	54.00	5.77	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

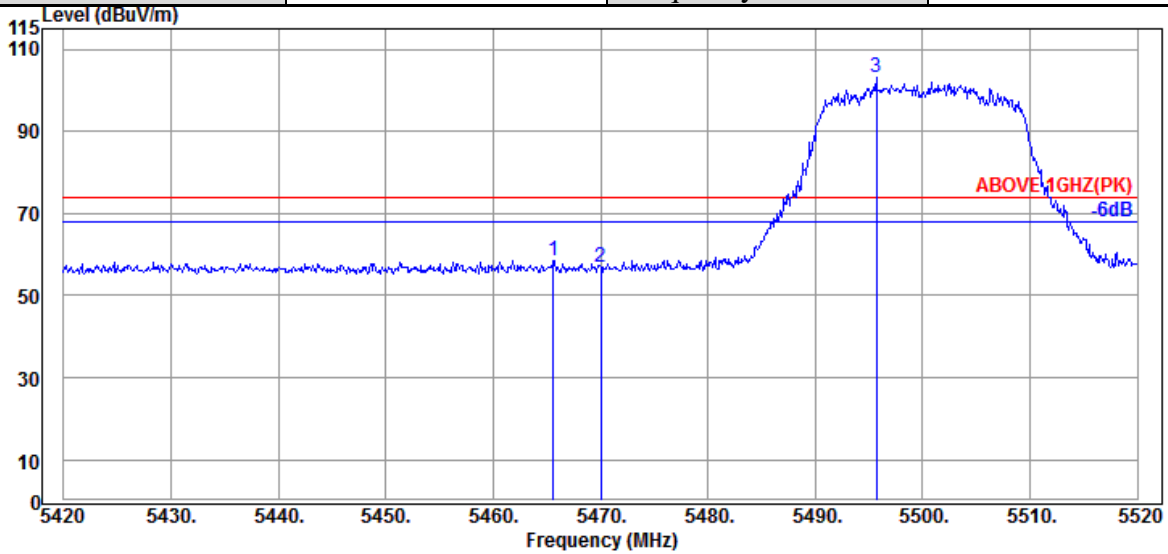

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.47	10.91	34.24	47.33	58.47	74.00	15.53	Peak
5470.000	34.47	10.91	34.24	45.73	56.87	74.00	17.13	Peak
@ 5495.700	34.40	10.93	34.23	92.14	103.24	---	---	Peak

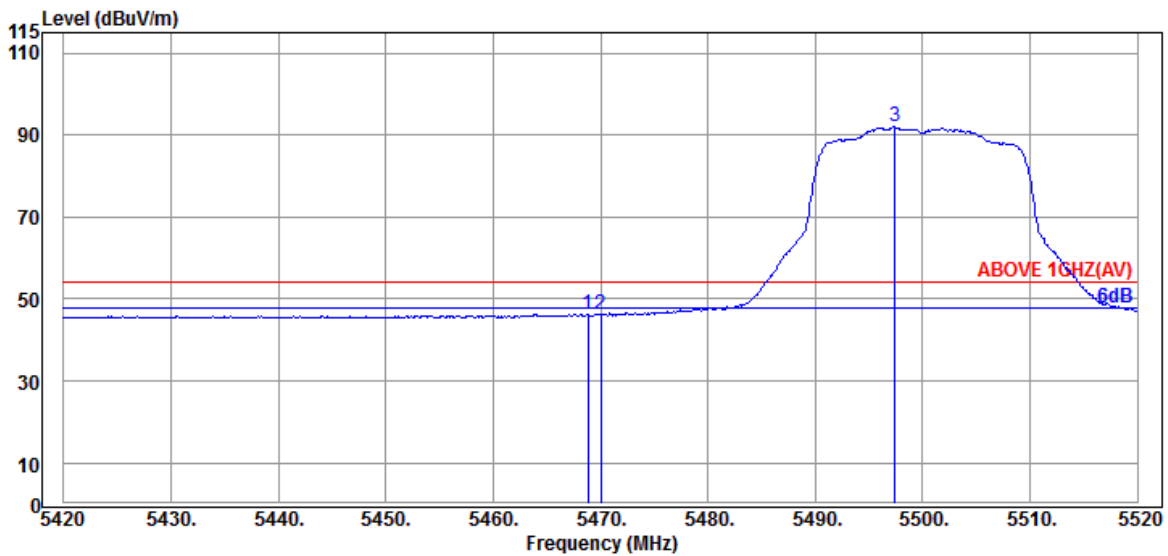


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.47	10.91	34.24	35.15	46.29	54.00	7.71	Average
5470.000	34.47	10.91	34.24	35.22	46.36	54.00	7.64	Average
@ 5497.400	34.40	10.93	34.23	80.93	92.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

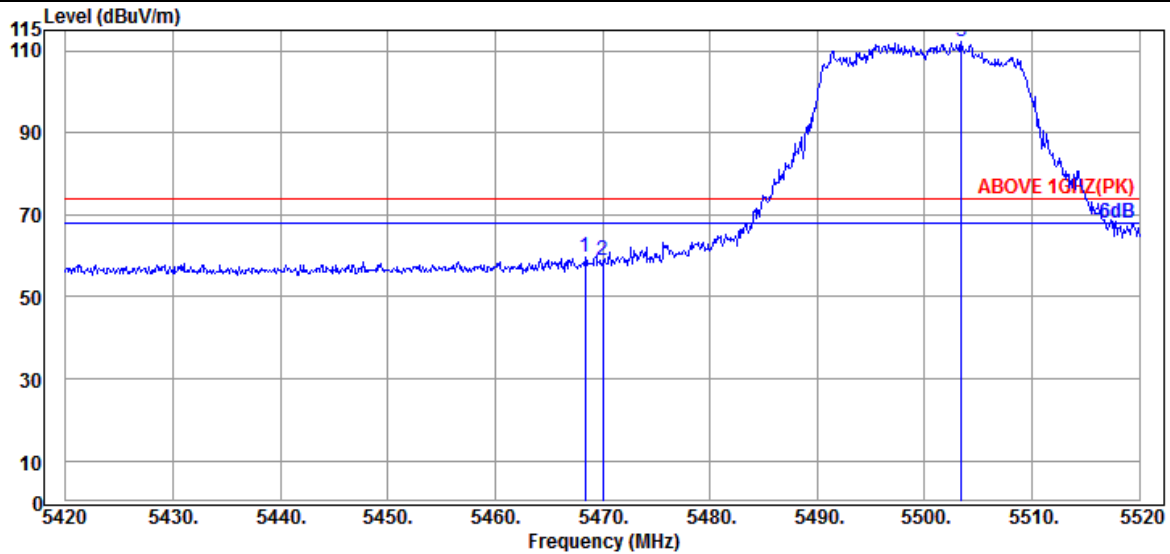

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.47	10.91	34.24	48.38	59.52	74.00	14.48	Peak
5470.000	34.47	10.91	34.24	47.91	59.05	74.00	14.95	Peak
@ 5503.400	34.40	10.93	34.24	101.23	112.32	---	---	Peak

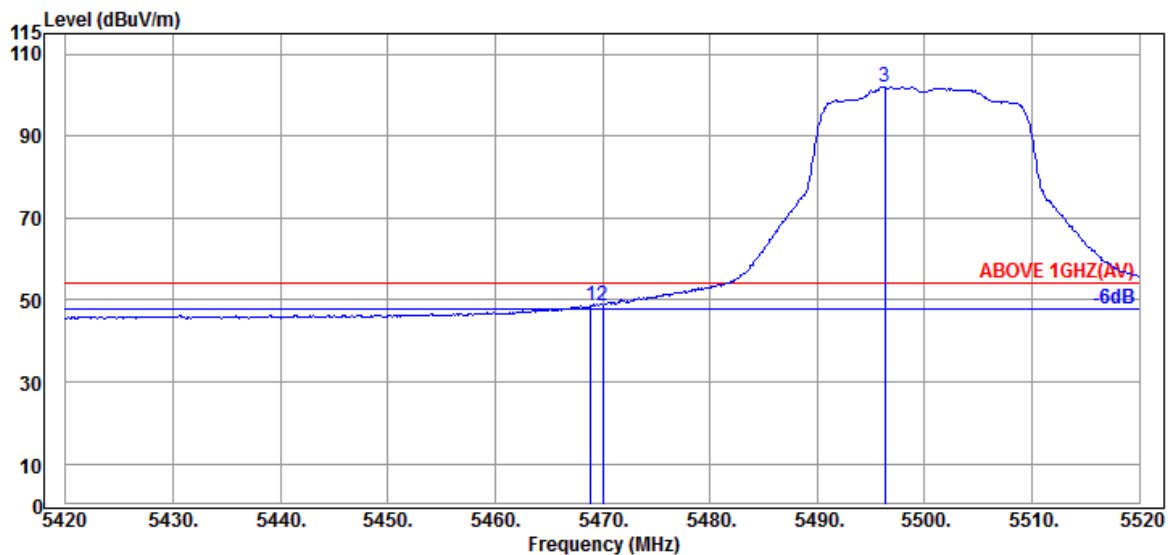


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	37.41	48.55	54.00	5.45	Average
5470.000	34.47	10.91	34.24	37.49	48.63	54.00	5.37	Average
@ 5496.300	34.40	10.93	34.23	90.91	102.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

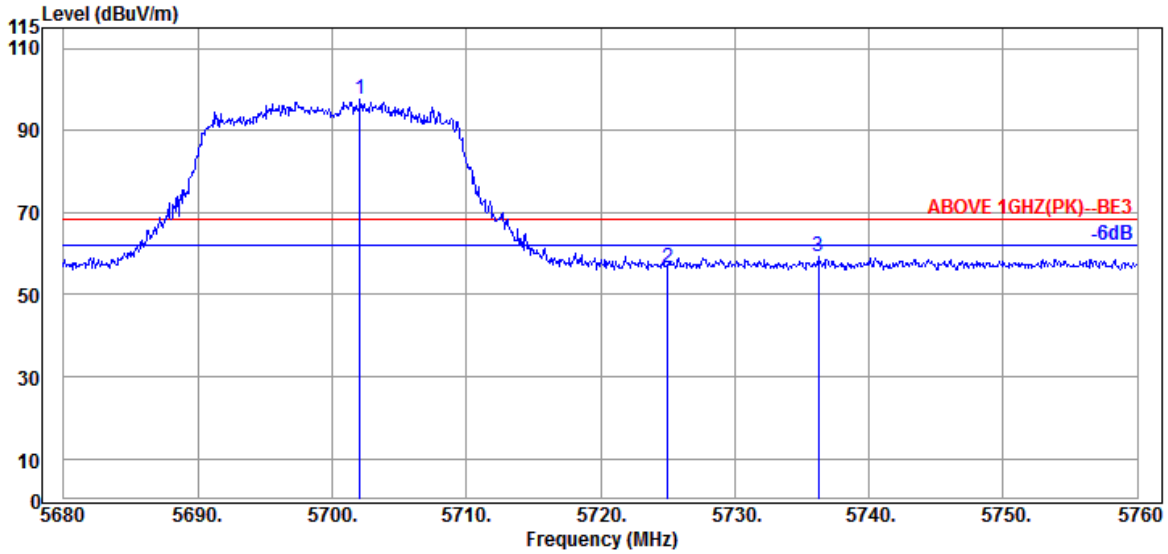

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.080	34.40	11.03	34.31	86.31	97.43	---	---	Peak
5725.040	34.67	11.05	34.32	45.18	56.58	68.20	11.62	Peak
5736.240	34.67	11.05	34.33	47.73	59.12	68.20	9.08	Peak

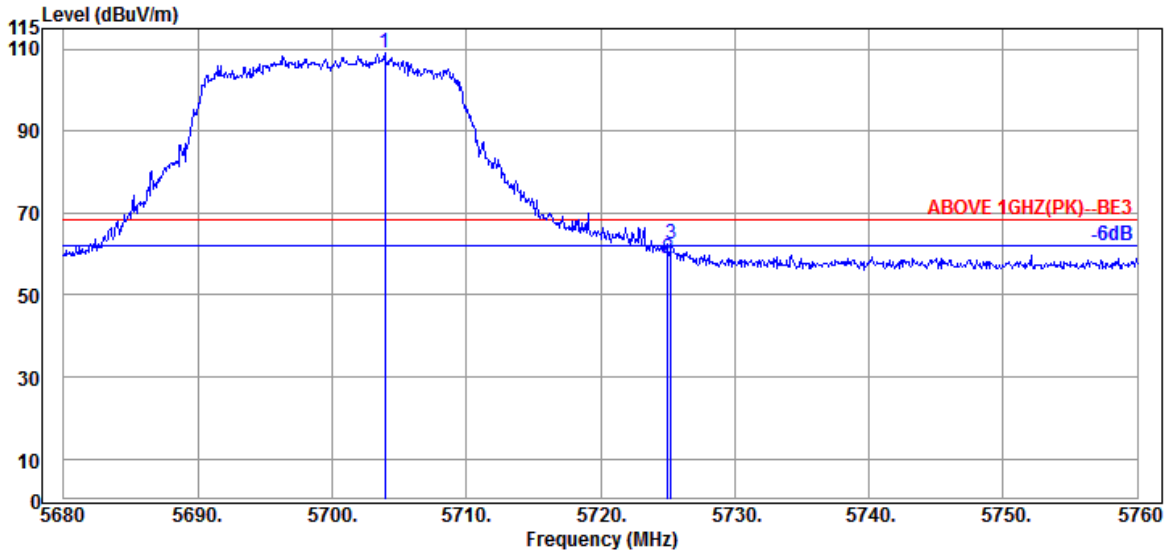


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.920	34.40	11.03	34.31	98.08	109.20	---	---	Peak
5725.040	34.67	11.05	34.32	47.65	59.05	68.20	9.15	Peak
5725.280	34.67	11.05	34.32	51.11	62.51	68.20	5.69	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

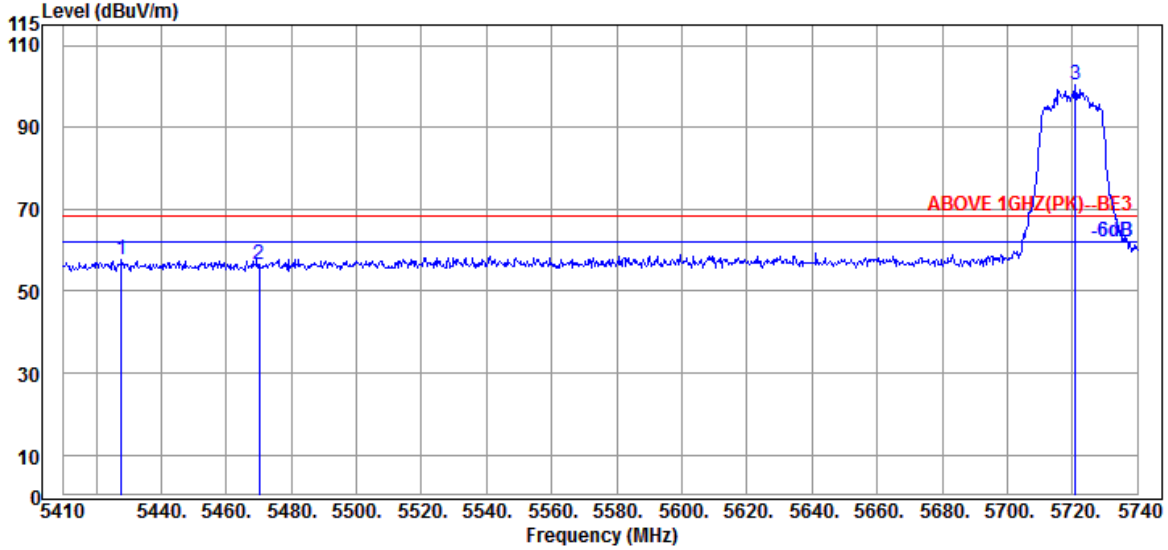

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5427.820	34.60	10.89	34.25	46.33	57.57	68.20	10.63	Peak
5470.060	34.47	10.91	34.24	45.28	56.42	68.20	11.78	Peak
@ 5720.860	34.53	11.05	34.32	88.94	100.20	---	---	Peak

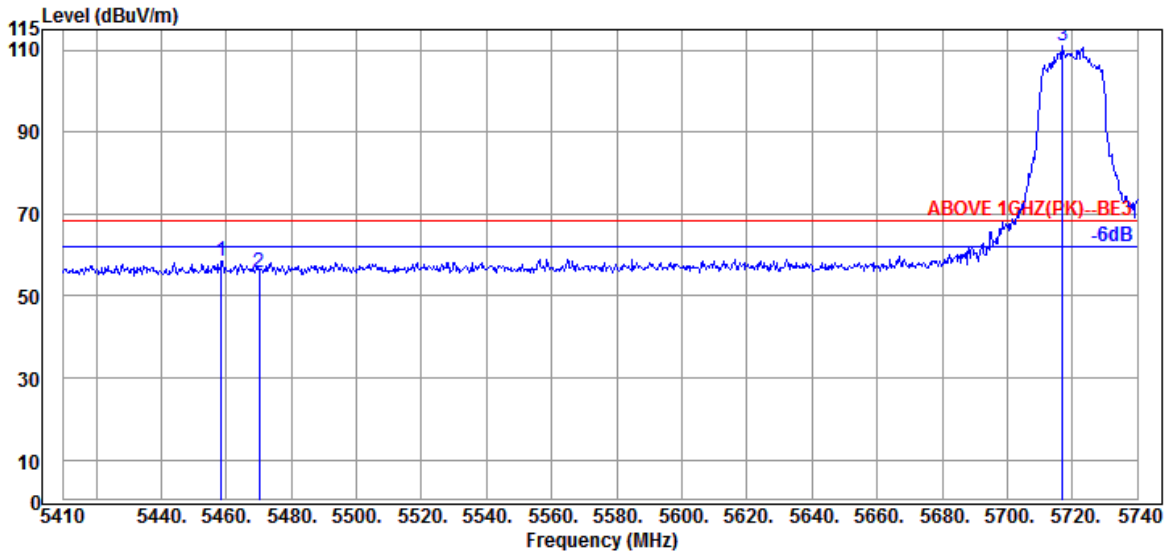


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.510	34.50	10.89	34.24	47.46	58.61	68.20	9.59	Peak
5470.060	34.47	10.91	34.24	44.47	55.61	68.20	12.59	Peak
@ 5716.900	34.53	11.05	34.32	99.69	110.95	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

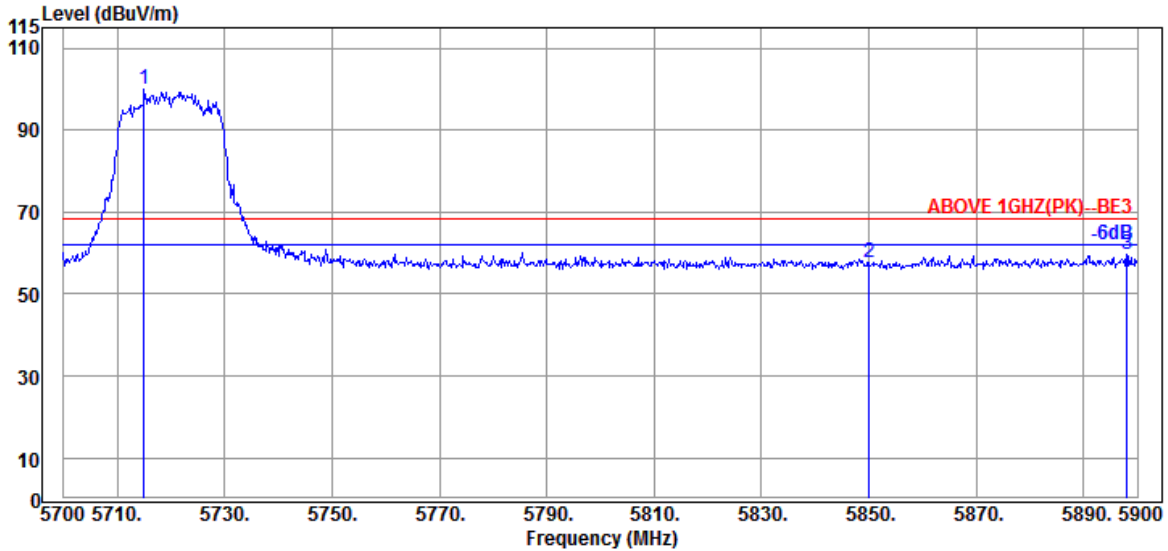

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.000	34.53	11.05	34.32	88.62	99.88	---	---	Peak
5850.000	35.10	11.10	34.38	45.82	57.64	68.20	10.56	Peak
5898.000	35.40	11.14	34.40	47.66	59.80	68.20	8.40	Peak

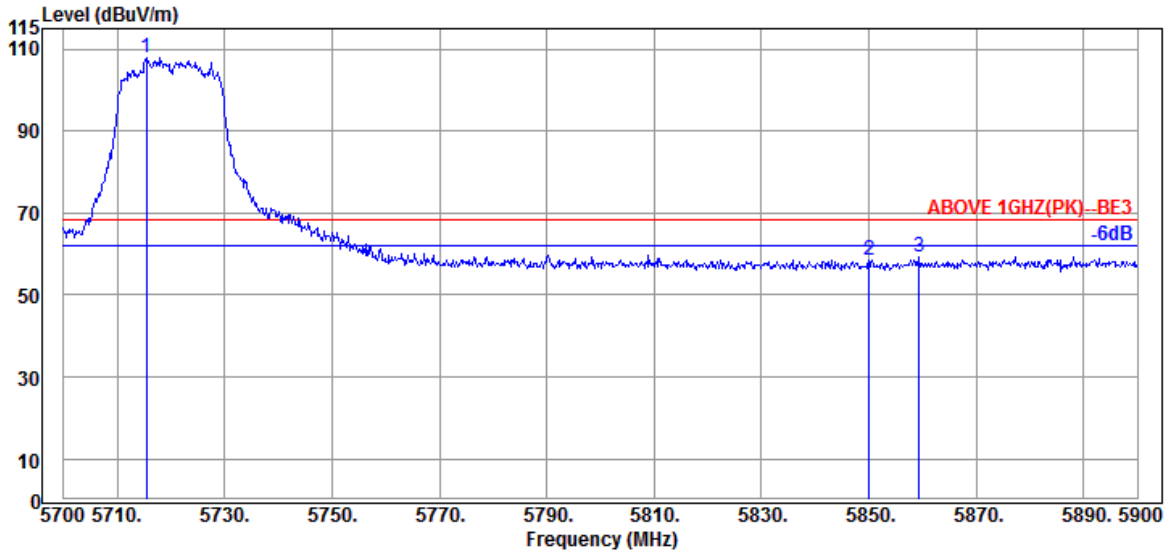


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.400	34.53	11.05	34.32	96.77	108.03	---	---	Peak
5850.000	35.10	11.10	34.38	46.86	58.68	68.20	9.52	Peak
5859.400	35.20	11.12	34.39	47.35	59.28	68.20	8.92	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

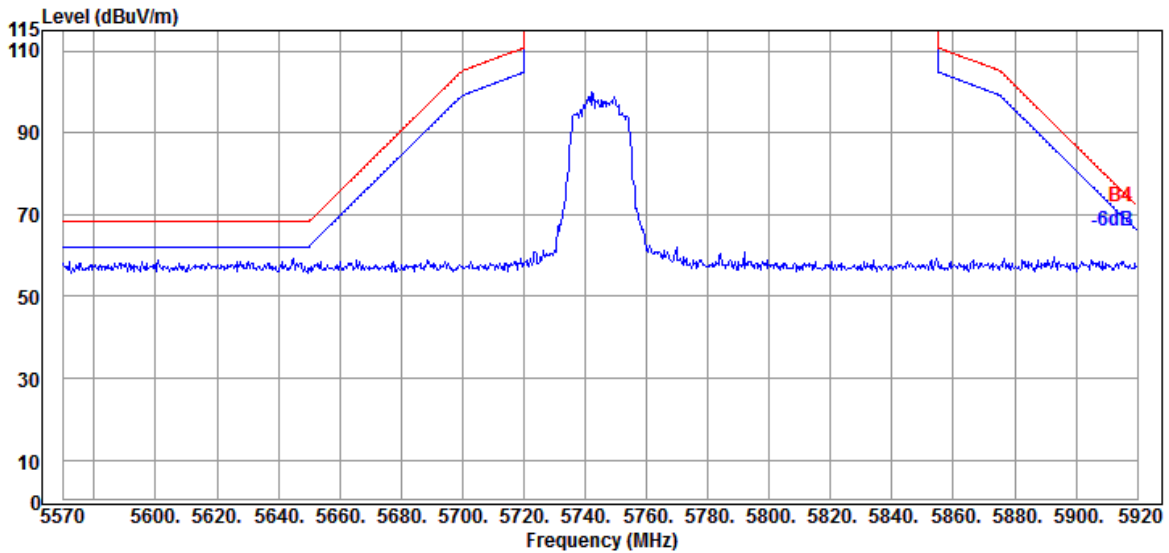


Antenna at Vertical Polarization

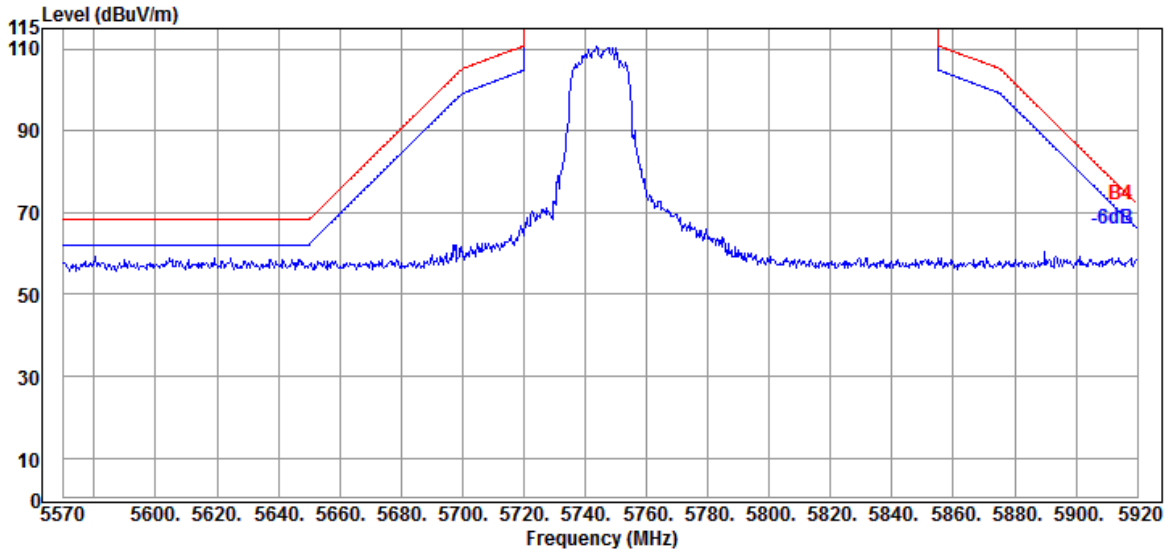


Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

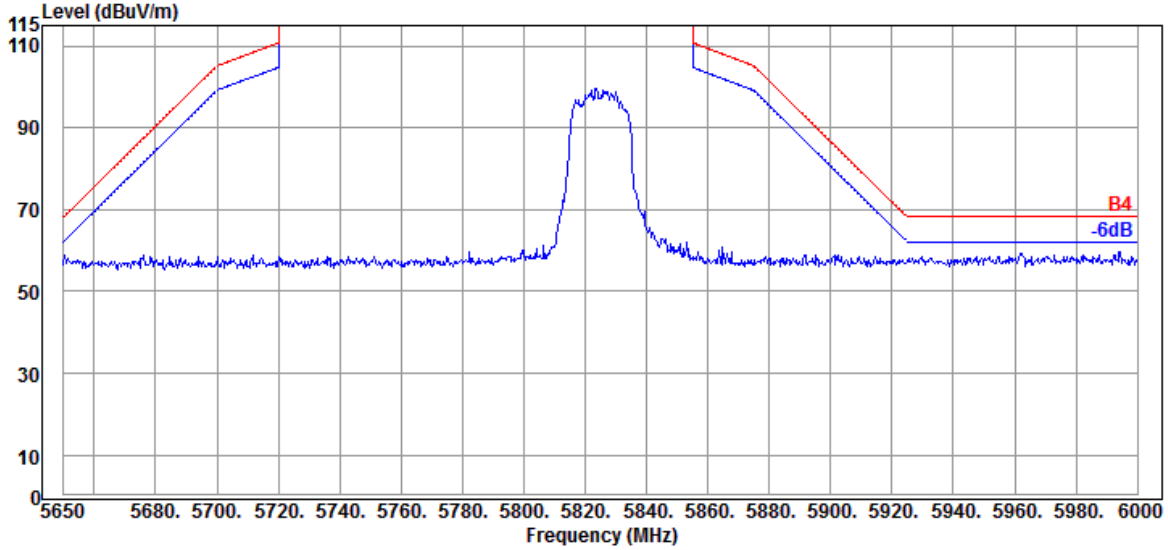

Antenna at Vertical Polarization

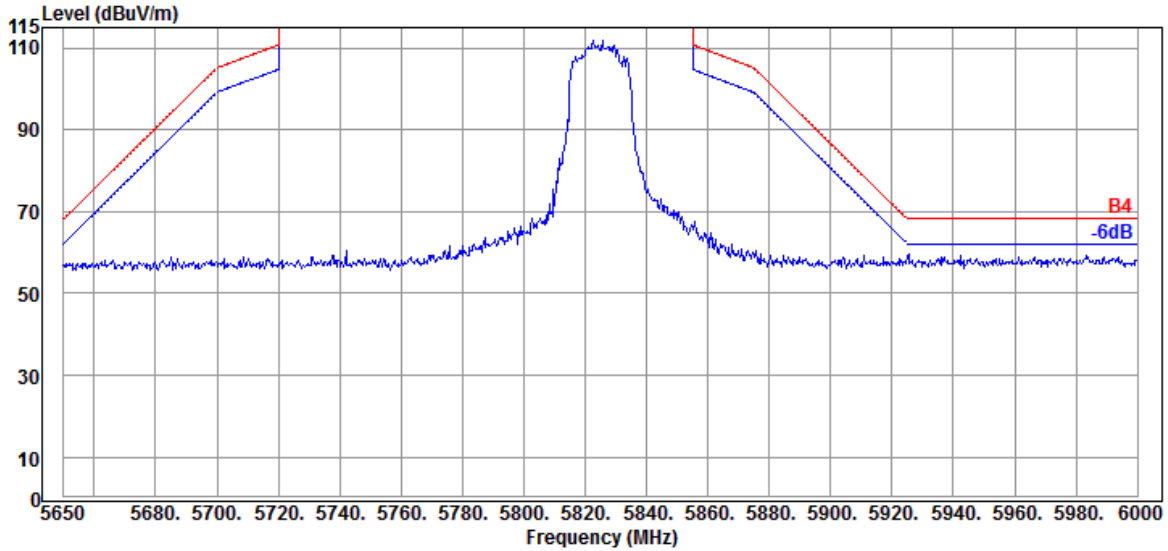


Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

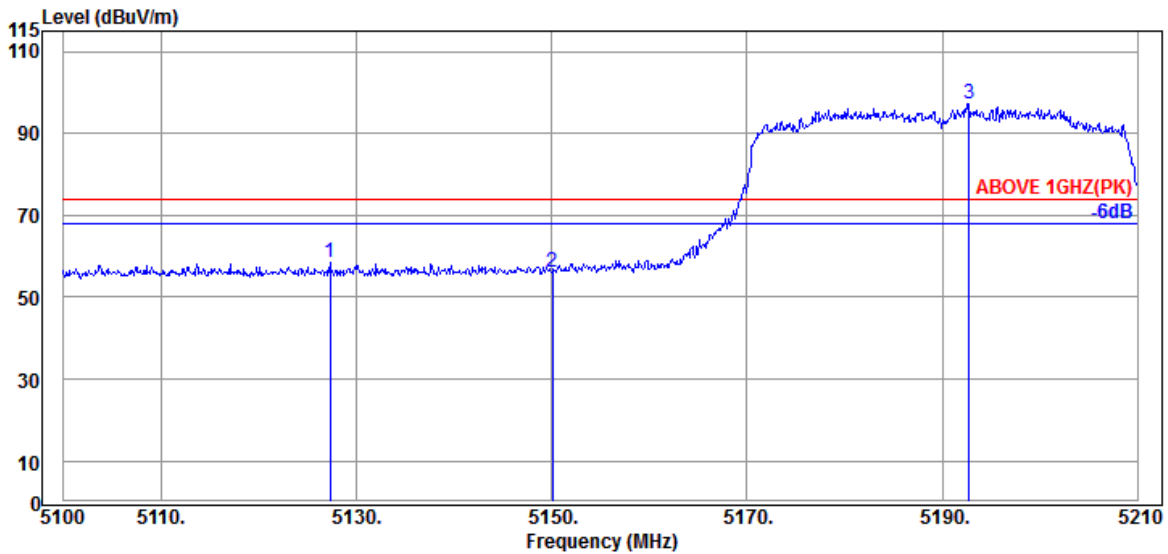

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.280	34.17	10.70	34.36	47.83	58.34	74.00	15.66	Peak
5150.050	34.20	10.70	34.35	45.55	56.10	74.00	17.90	Peak
@ 5192.730	34.20	10.74	34.34	86.65	97.25	---	---	Peak

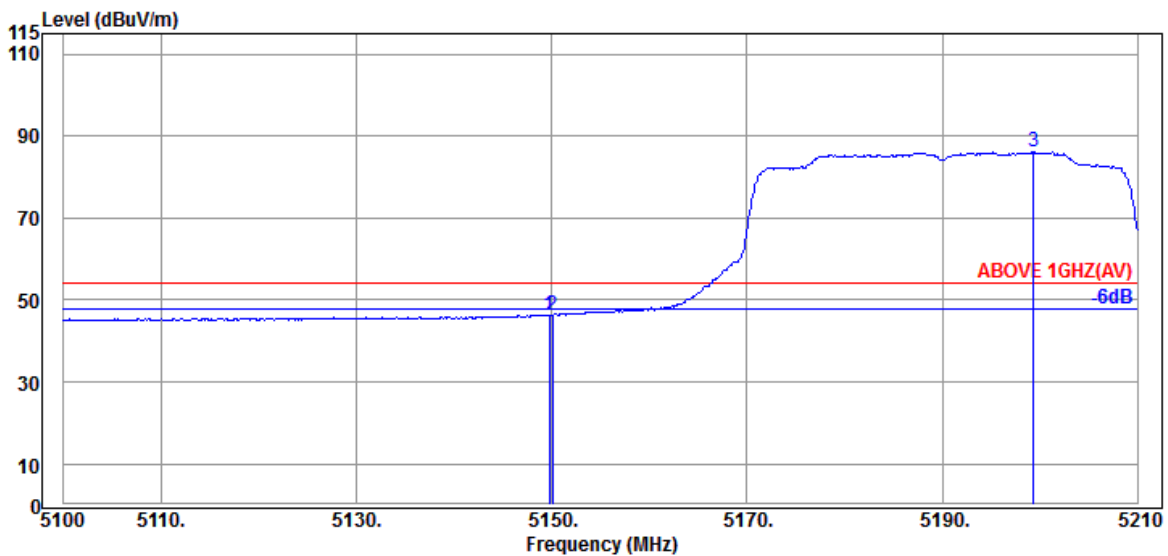


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	10.70	34.35	35.83	46.38	54.00	7.62	Average
5150.050	34.20	10.70	34.35	35.70	46.25	54.00	7.75	Average
@ 5199.330	34.20	10.74	34.33	75.42	86.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

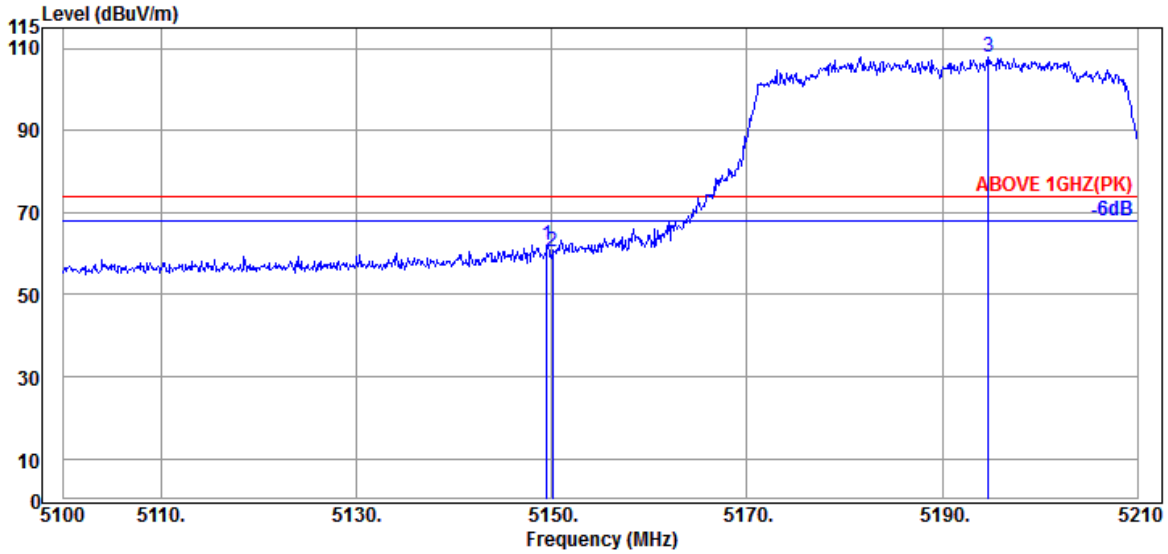

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	10.70	34.35	51.42	61.97	74.00	12.03	Peak
5150.050	34.20	10.70	34.35	49.93	60.48	74.00	13.52	Peak
@ 5194.710	34.20	10.74	34.34	97.15	107.75	---	---	Peak

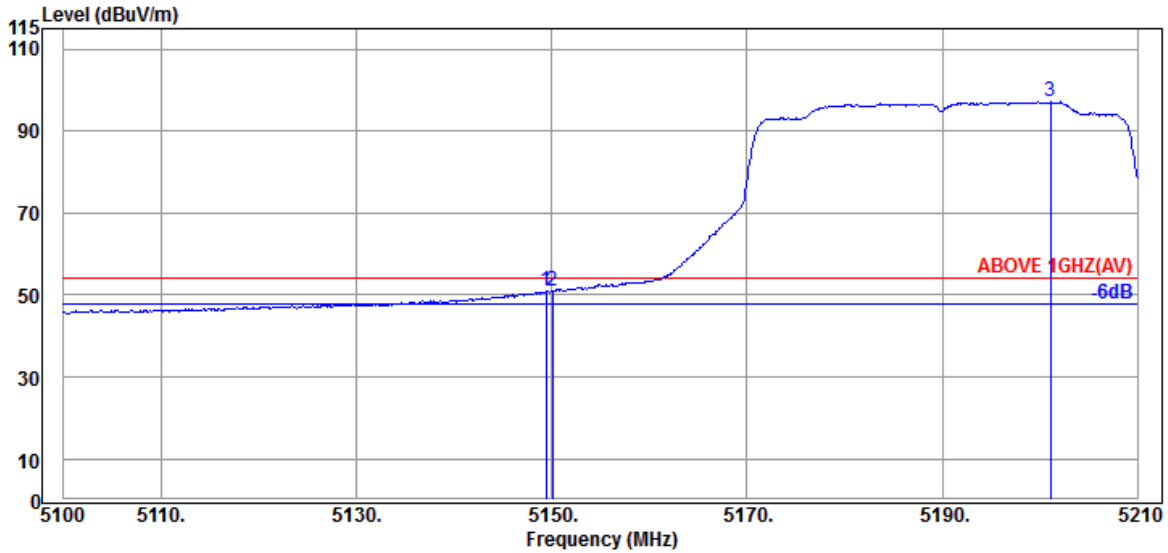


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.20	10.70	34.35	40.43	50.98	54.00	3.02	Average
5150.050	34.20	10.70	34.35	40.34	50.89	54.00	3.11	Average
@ 5201.090	34.20	10.74	34.33	86.52	97.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

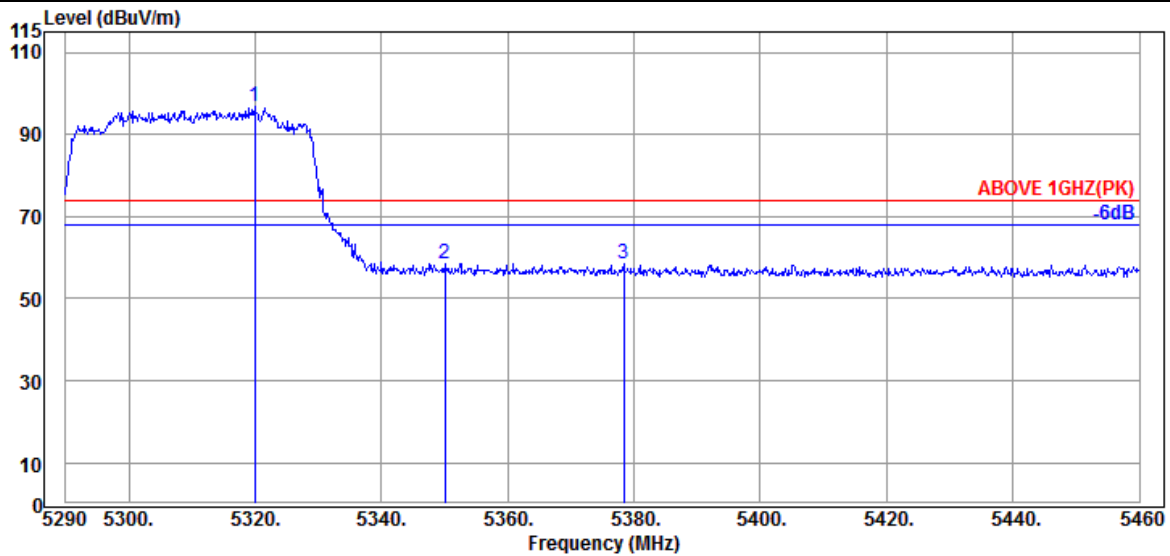

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.920	34.53	10.81	34.29	85.68	96.73	---	---	Peak
5350.010	34.60	10.83	34.27	47.45	58.61	74.00	15.39	Peak
5378.400	34.67	10.85	34.27	47.16	58.41	74.00	15.59	Peak

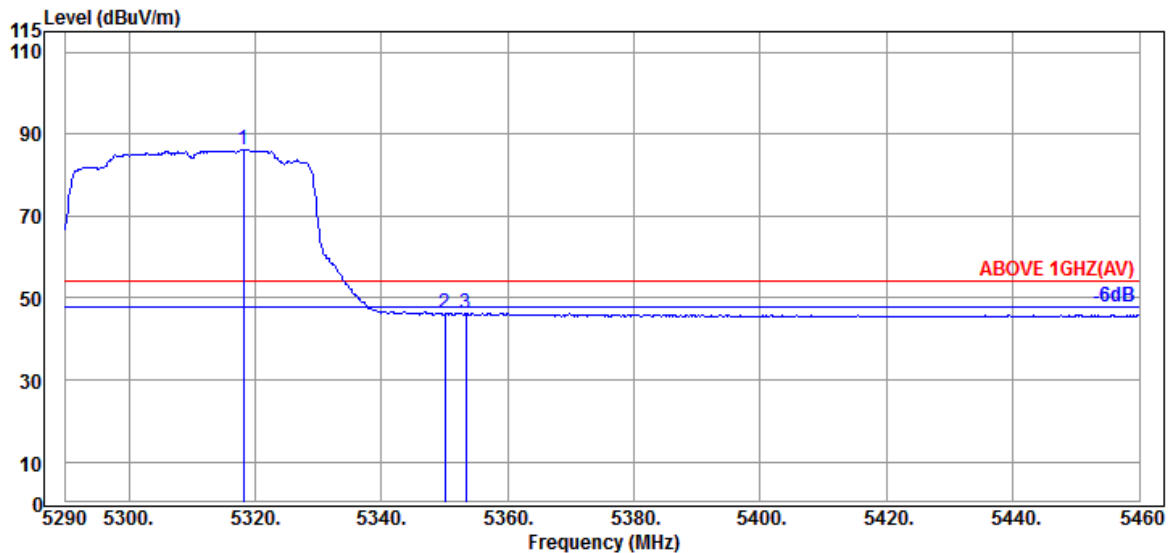


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.220	34.53	10.81	34.29	75.21	86.26	---	---	Average
5350.010	34.60	10.83	34.27	34.93	46.09	54.00	7.91	Average
5353.410	34.60	10.83	34.27	35.15	46.31	54.00	7.69	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

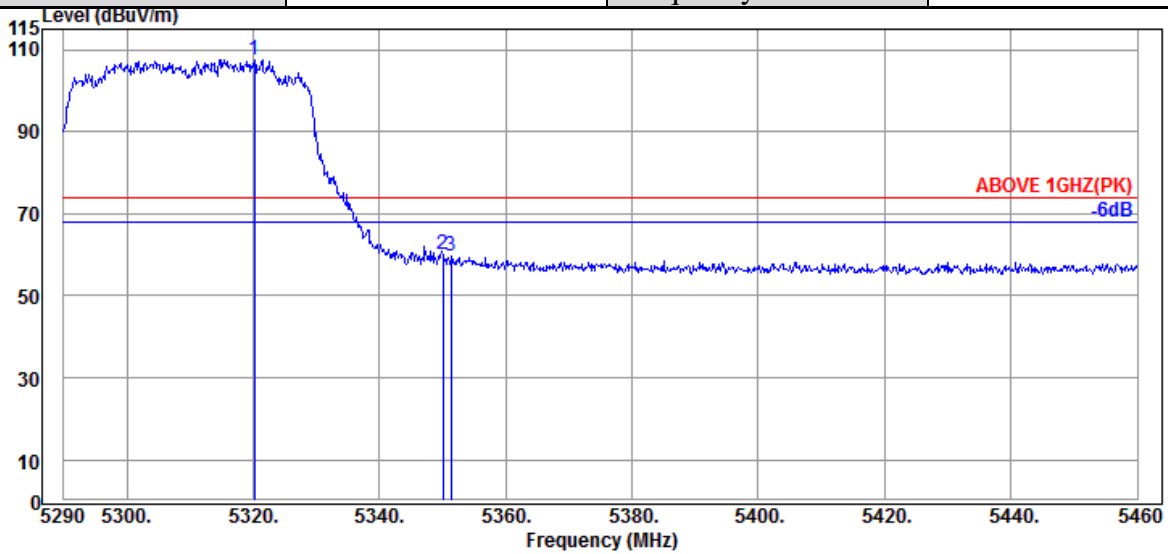

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.260	34.53	10.81	34.29	96.61	107.66	---	---	Peak
5350.010	34.60	10.83	34.27	48.93	60.09	74.00	13.91	Peak
5351.370	34.60	10.83	34.27	48.36	59.52	74.00	14.48	Peak

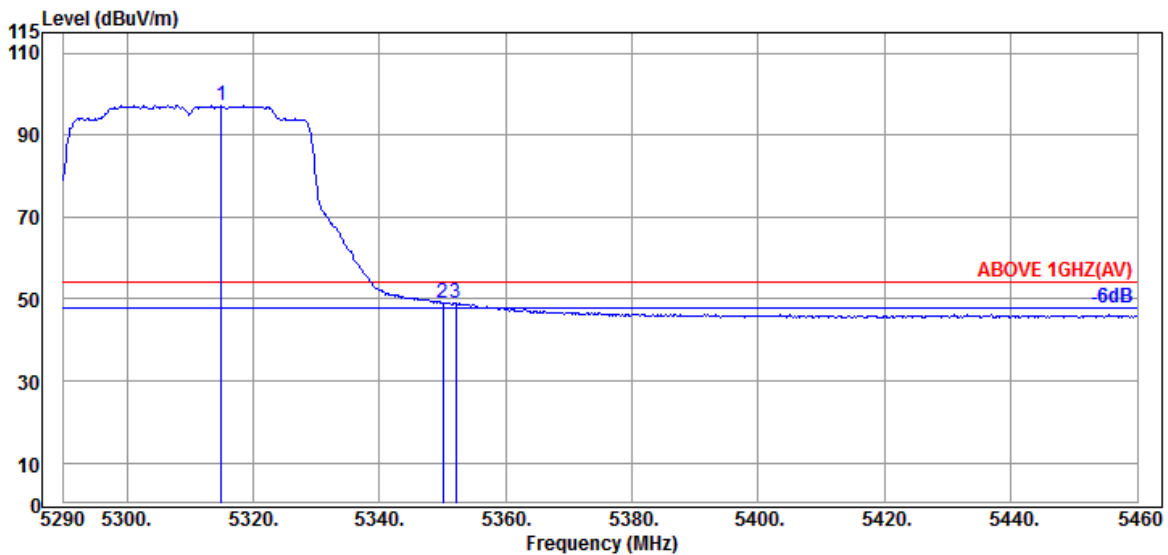


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.990	34.53	10.81	34.29	86.16	97.21	---	---	Average
5350.010	34.60	10.83	34.27	37.73	48.89	54.00	5.11	Average
5352.050	34.60	10.83	34.27	38.03	49.19	54.00	4.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

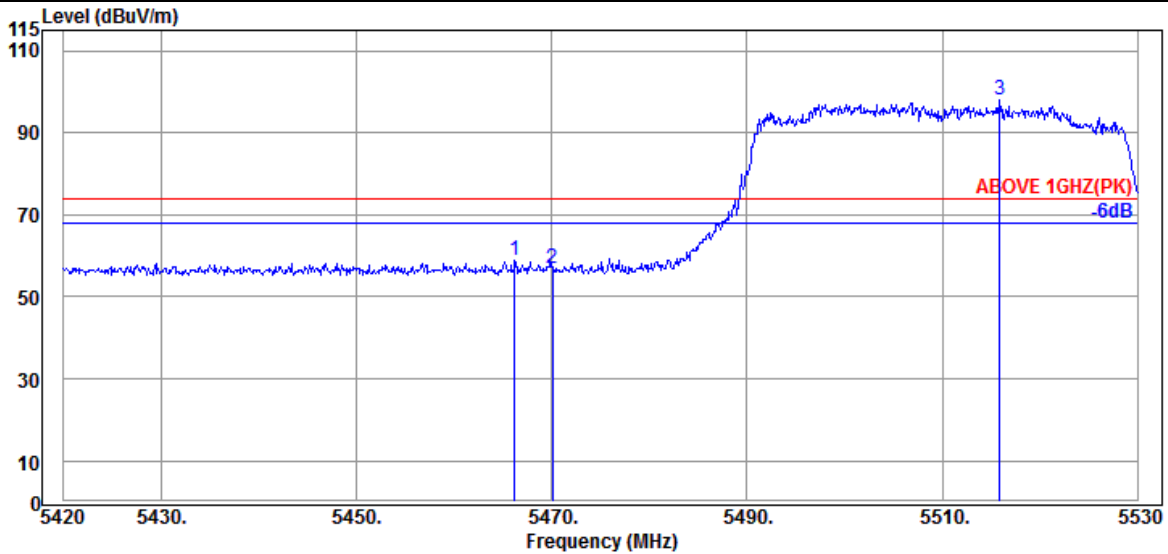

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.47	10.91	34.24	47.67	58.81	74.00	15.19	Peak
5470.050	34.47	10.91	34.24	45.85	56.99	74.00	17.01	Peak
@ 5515.920	34.37	10.93	34.24	86.81	97.87	---	---	Peak

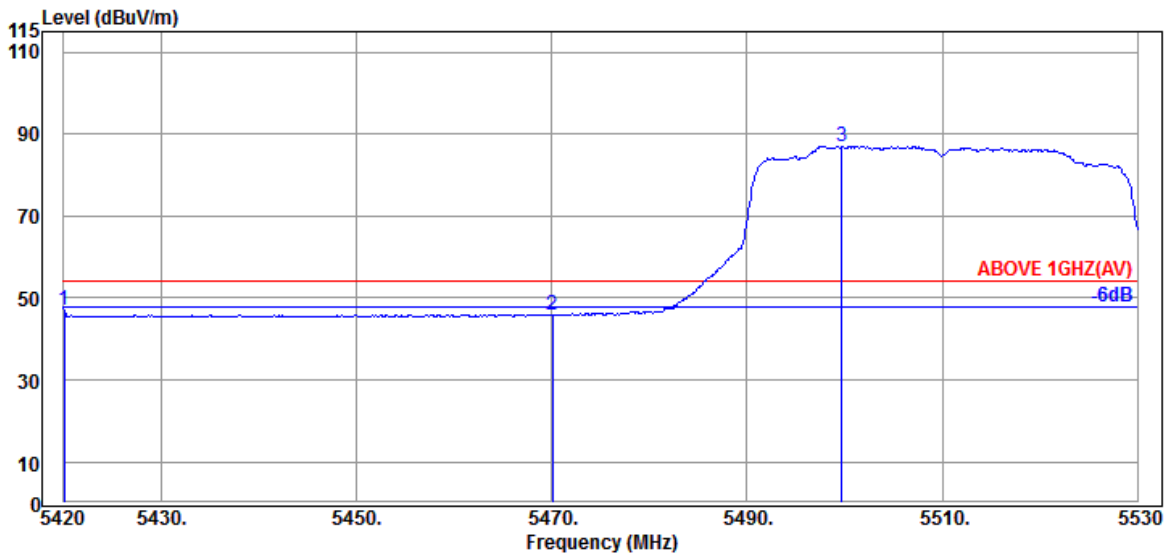


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.110	34.60	10.87	34.26	35.79	47.00	54.00	7.00	Average
5470.050	34.47	10.91	34.24	34.56	45.70	54.00	8.30	Average
@ 5499.750	34.40	10.93	34.23	76.00	87.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

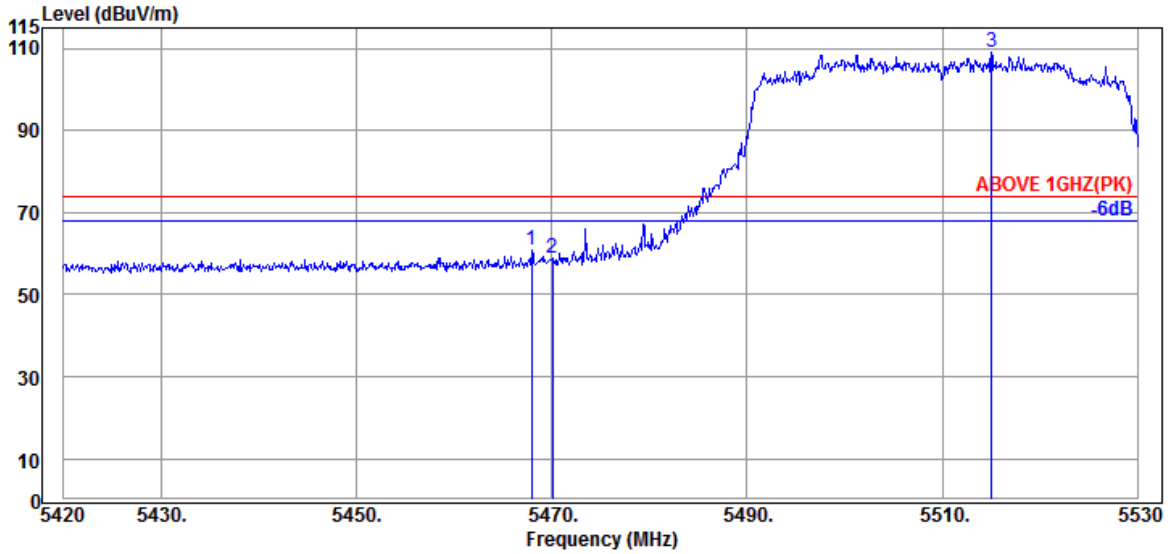

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.960	34.47	10.91	34.24	49.81	60.95	74.00	13.05	Peak
5470.050	34.47	10.91	34.24	47.59	58.73	74.00	15.27	Peak
@ 5515.040	34.37	10.93	34.24	97.83	108.89	---	---	Peak

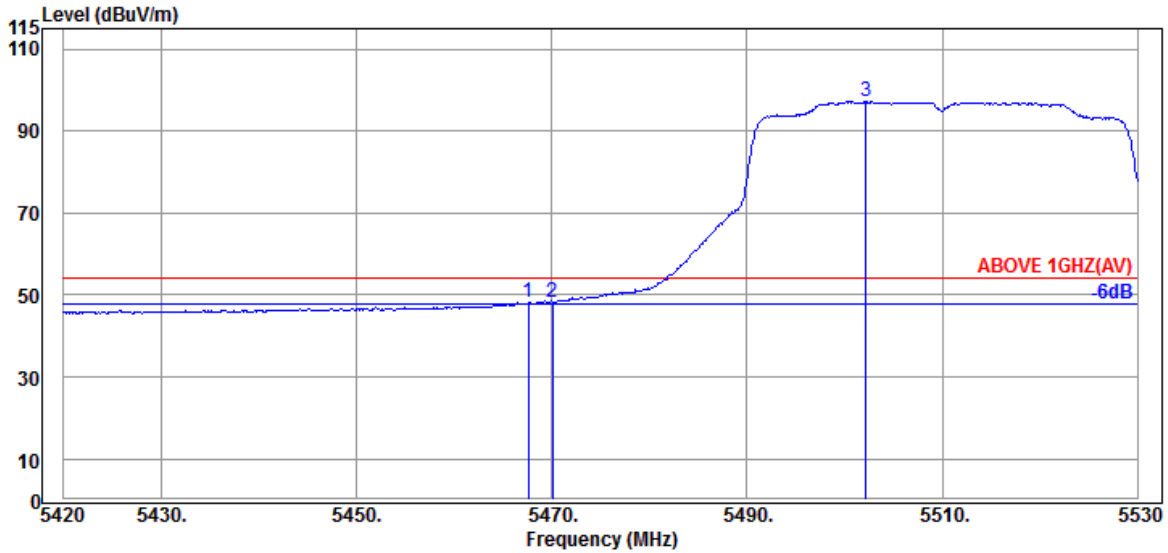


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.630	34.47	10.91	34.24	37.14	48.28	54.00	5.72	Average
5470.050	34.47	10.91	34.24	37.13	48.27	54.00	5.73	Average
@ 5502.170	34.40	10.93	34.24	86.08	97.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

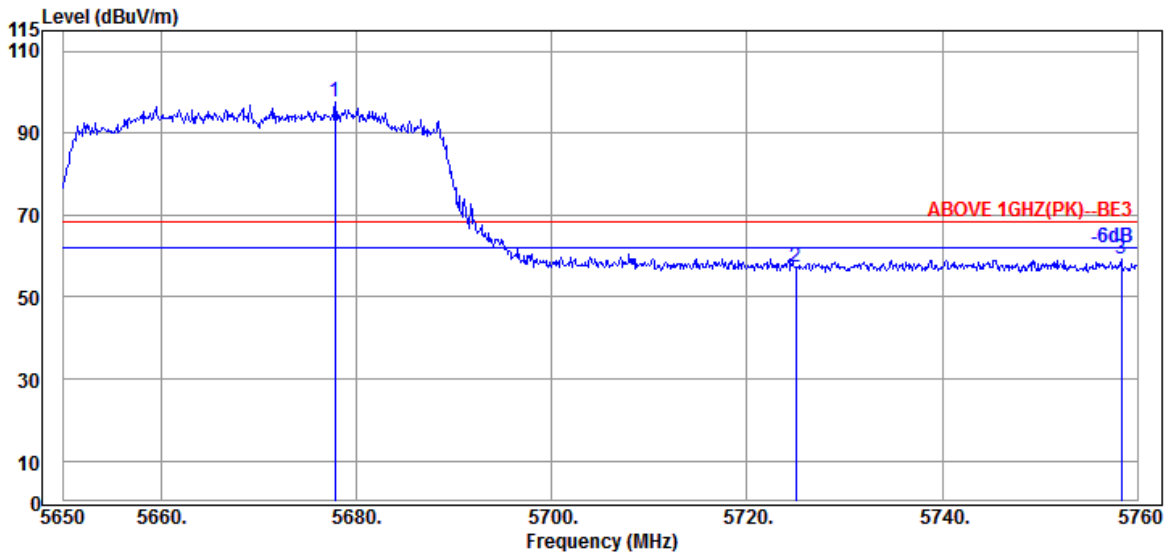

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.830	34.40	11.03	34.30	86.28	97.41	---	---	Peak
5725.020	34.67	11.05	34.32	45.78	57.18	68.20	11.02	Peak
5758.350	34.87	11.06	34.35	47.51	59.09	68.20	9.11	Peak

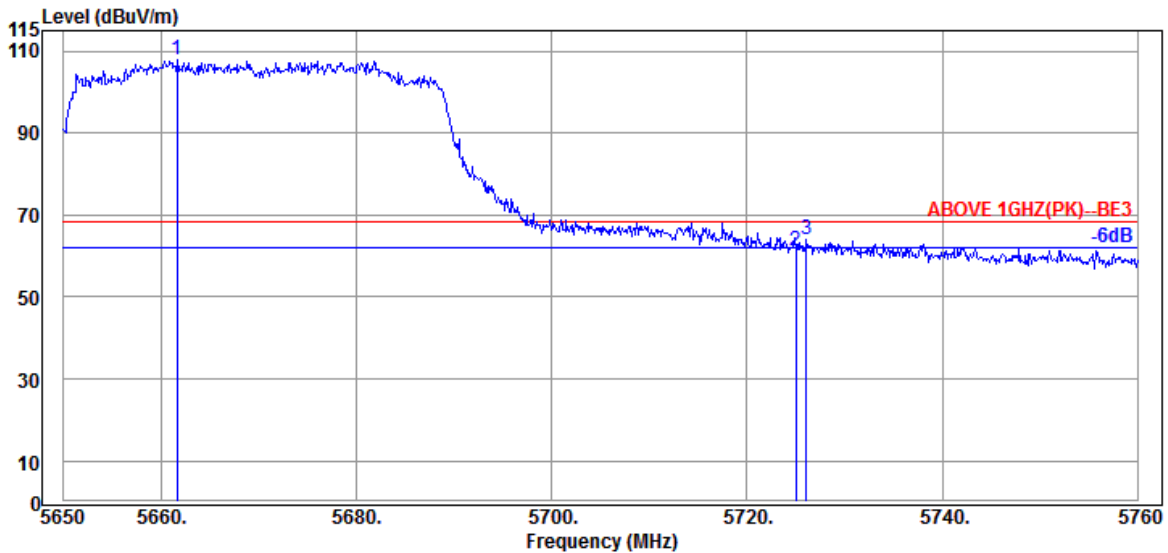


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.660	34.40	11.01	34.30	96.70	107.81	---	---	Peak
5725.020	34.67	11.05	34.32	50.03	61.43	68.20	6.77	Peak
5726.120	34.67	11.05	34.32	52.75	64.15	68.20	4.05	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

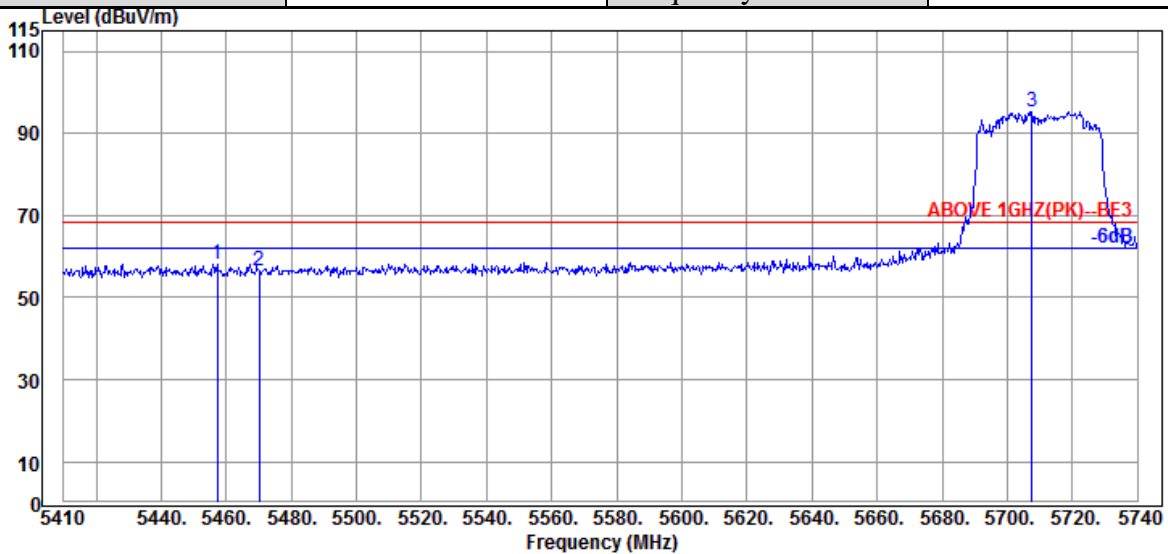

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.190	34.50	10.89	34.24	47.13	58.28	68.20	9.92	Peak
5470.060	34.47	10.91	34.24	45.52	56.66	68.20	11.54	Peak
@ 5707.660	34.53	11.03	34.32	84.14	95.38	---	---	Peak

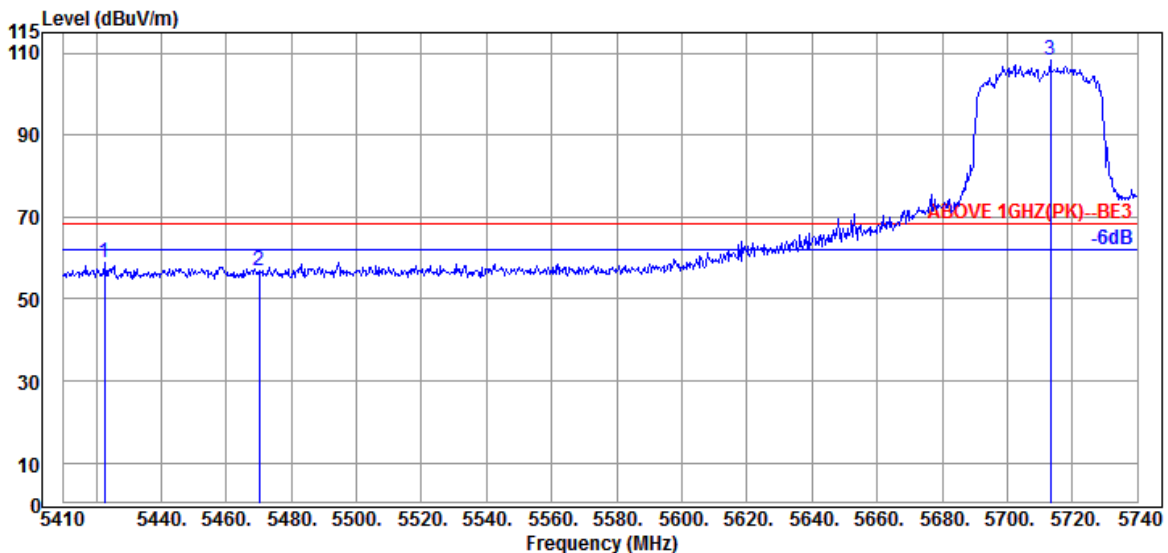


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.540	34.60	10.87	34.26	47.73	58.94	68.20	9.26	Peak
5470.060	34.47	10.91	34.24	45.93	57.07	68.20	11.13	Peak
@ 5713.270	34.53	11.05	34.32	96.90	108.16	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

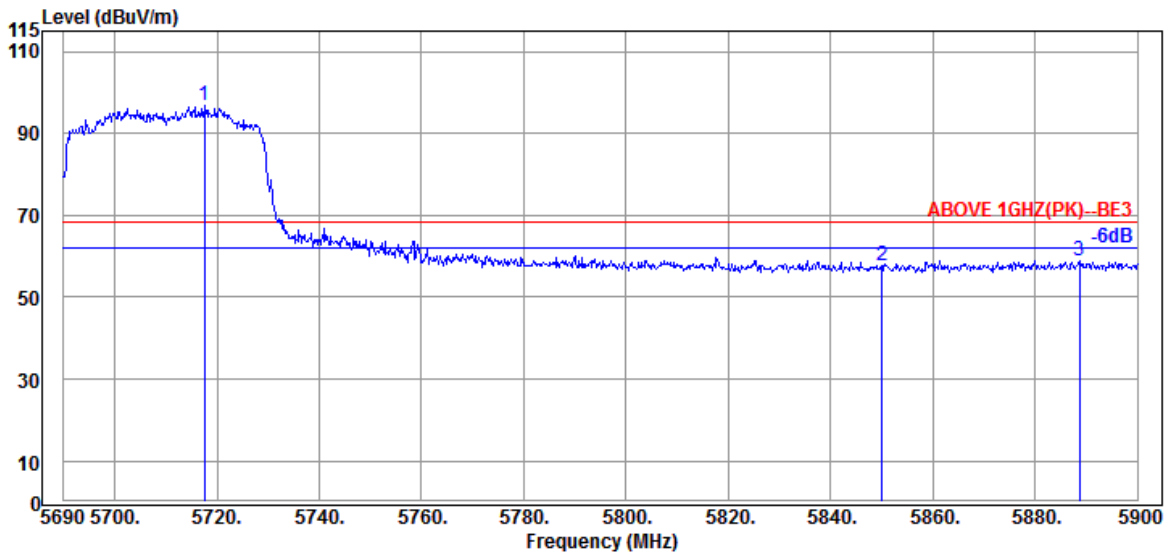

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.510	34.53	11.05	34.32	85.52	96.78	---	---	Peak
5850.020	35.10	11.10	34.38	45.81	57.63	68.20	10.57	Peak
5888.660	35.30	11.12	34.40	46.87	58.89	68.20	9.31	Peak

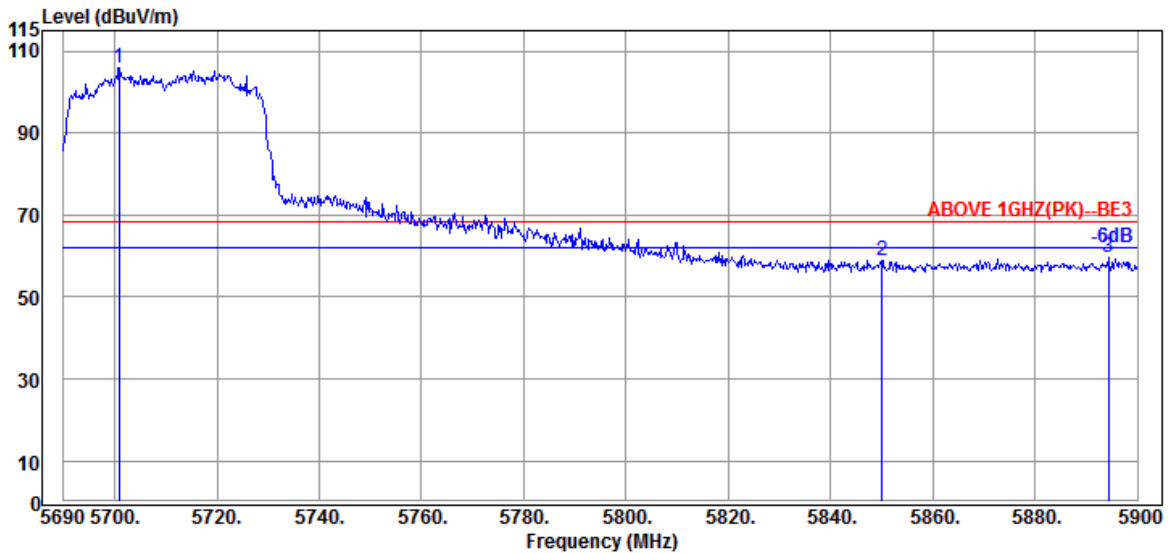


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.920	34.40	11.03	34.31	94.90	106.02	---	---	Peak
5850.020	35.10	11.10	34.38	47.25	59.07	68.20	9.13	Peak
5894.330	35.40	11.12	34.40	47.58	59.70	68.20	8.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

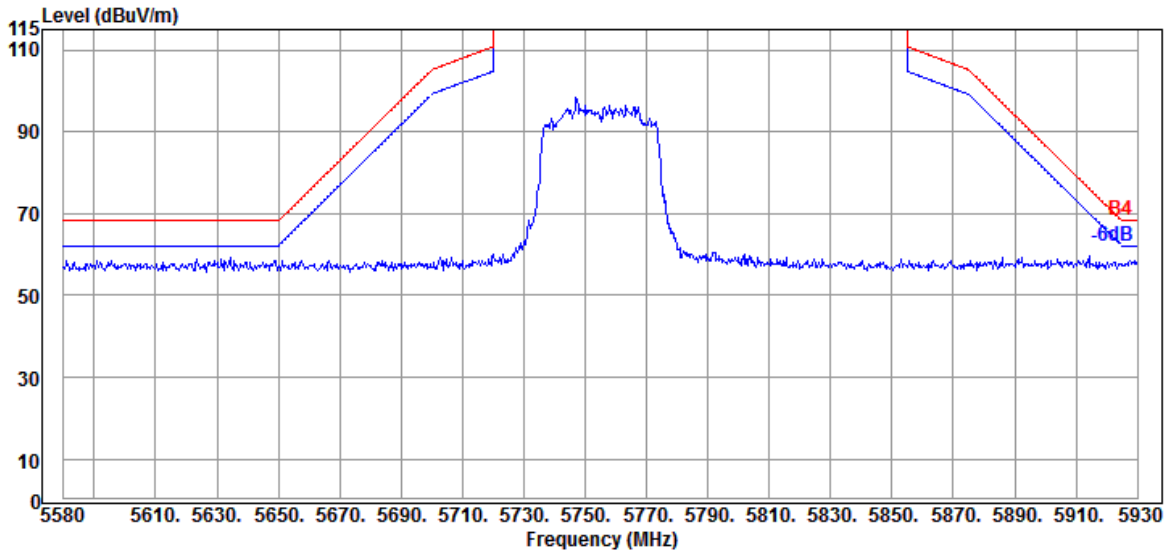


Antenna at Vertical Polarization

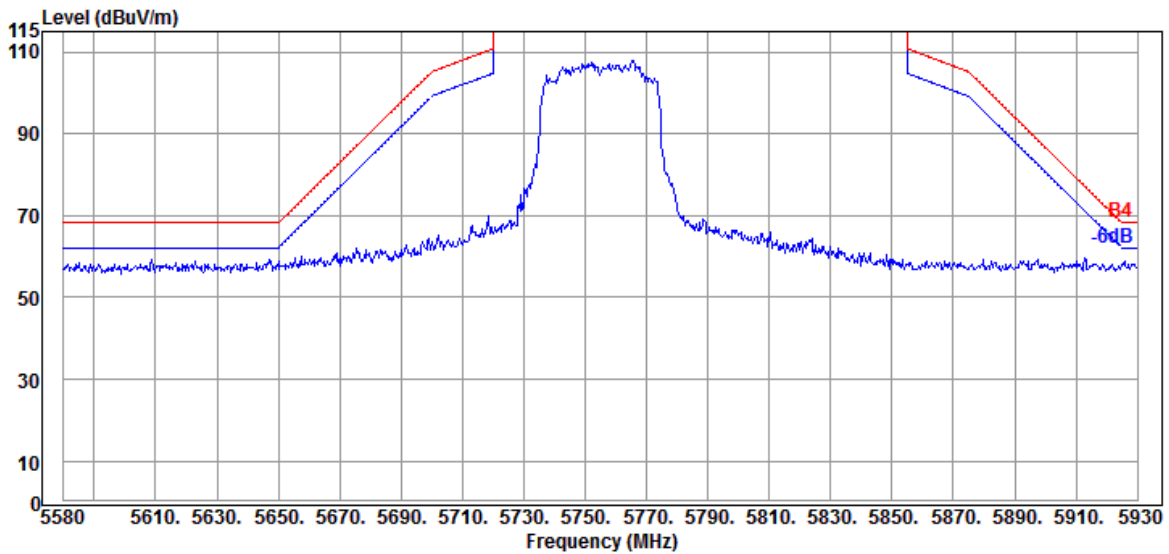


Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

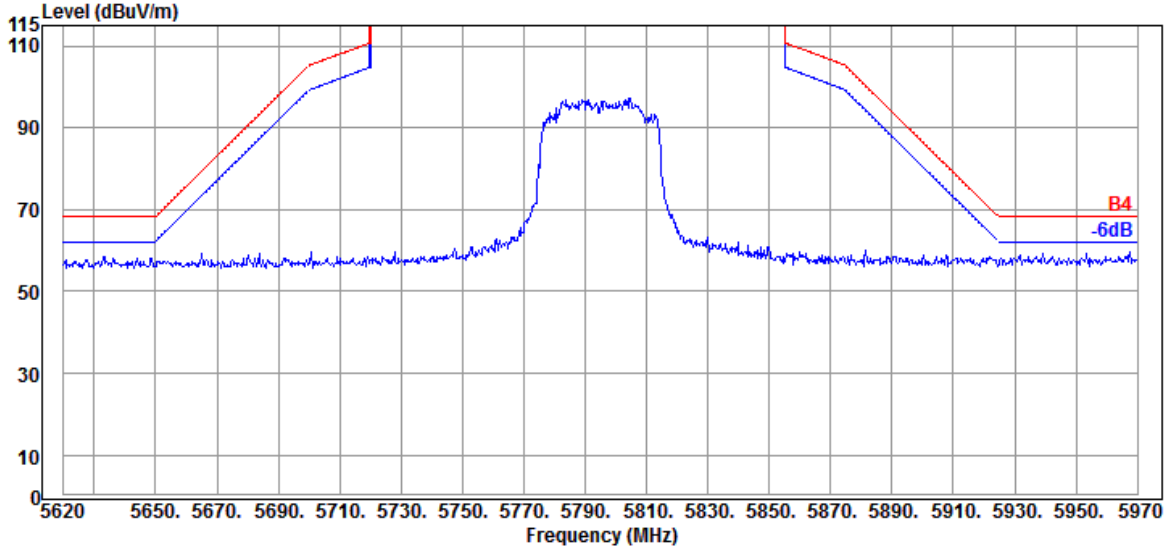

Antenna at Vertical Polarization

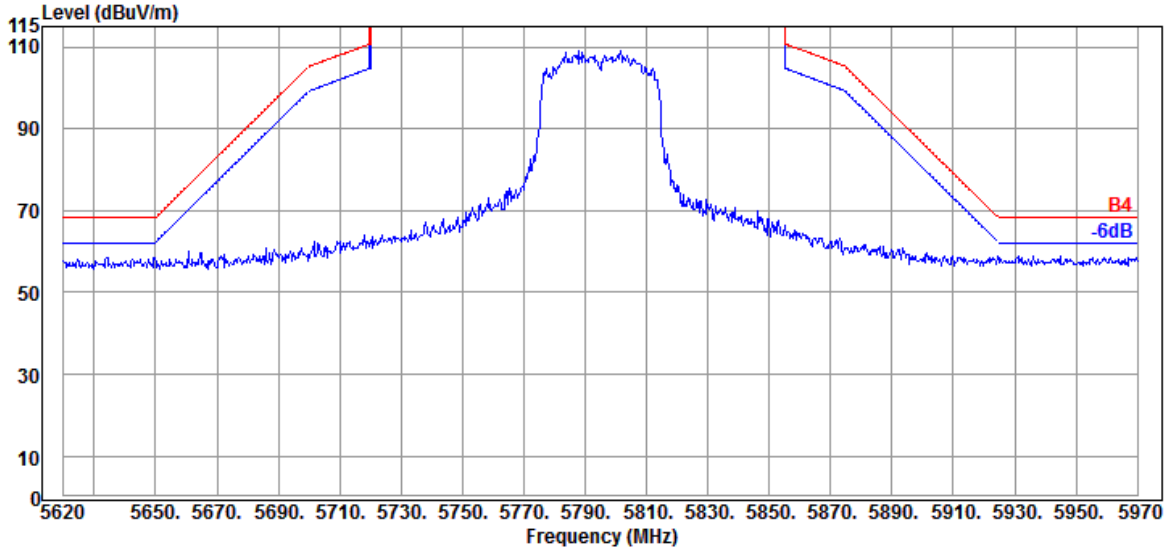


Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

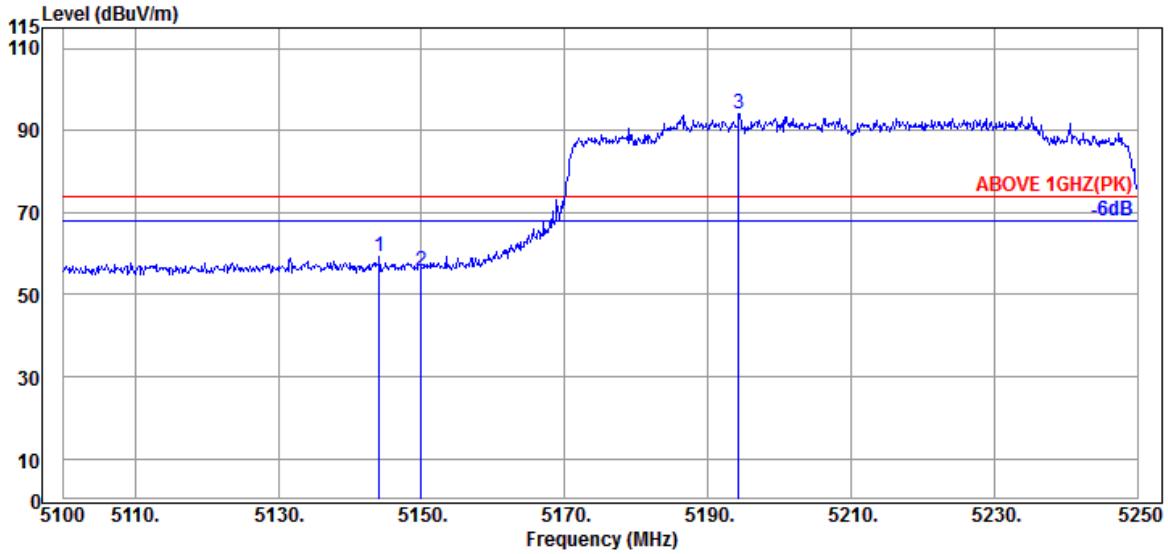

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	34.20	10.70	34.35	48.87	59.42	74.00	14.58	Peak
5149.950	34.20	10.70	34.35	45.27	55.82	74.00	18.18	Peak
@ 5194.350	34.20	10.74	34.34	83.46	94.06	---	---	Peak

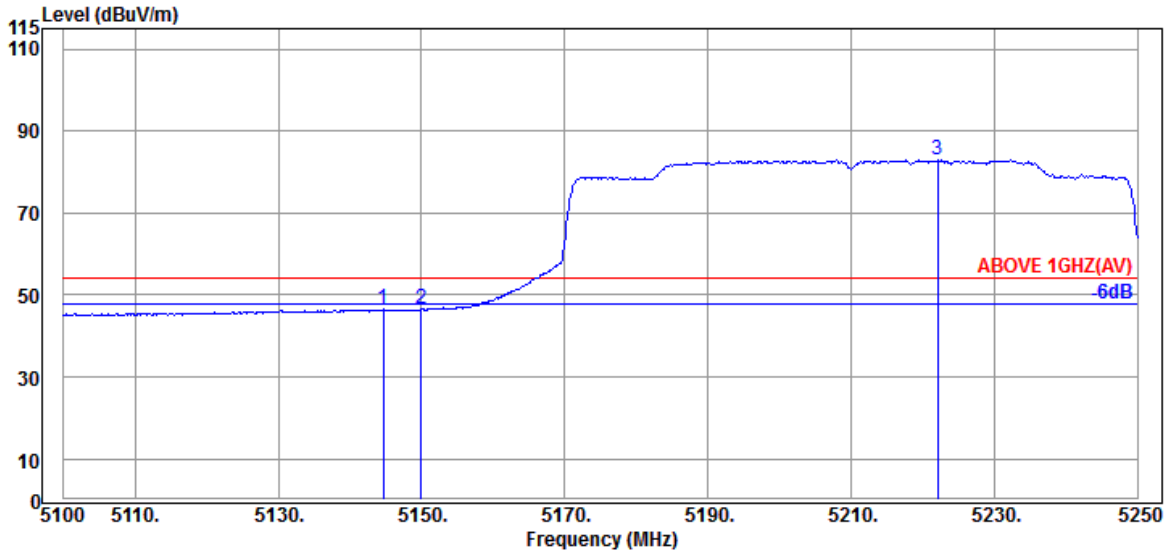


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	34.20	10.70	34.35	35.90	46.45	54.00	7.55	Average
5149.950	34.20	10.70	34.35	36.08	46.63	54.00	7.37	Average
@ 5222.100	34.30	10.76	34.32	72.17	82.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

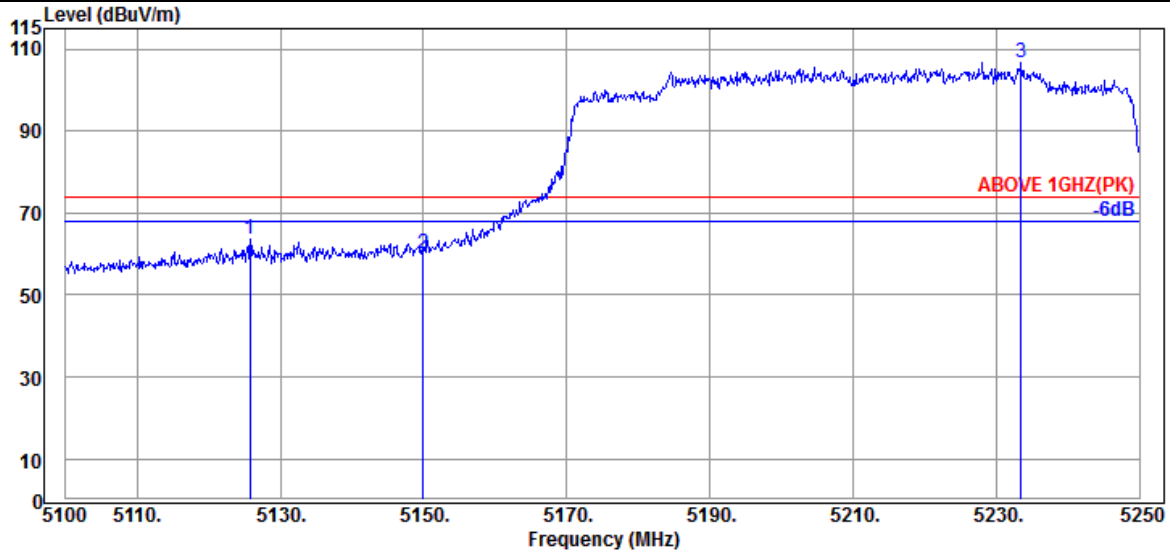

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.800	34.13	10.70	34.36	53.32	63.79	74.00	10.21	Peak
5149.950	34.20	10.70	34.35	49.70	60.25	74.00	13.75	Peak
@ 5233.500	34.35	10.76	34.32	96.08	106.87	---	---	Peak

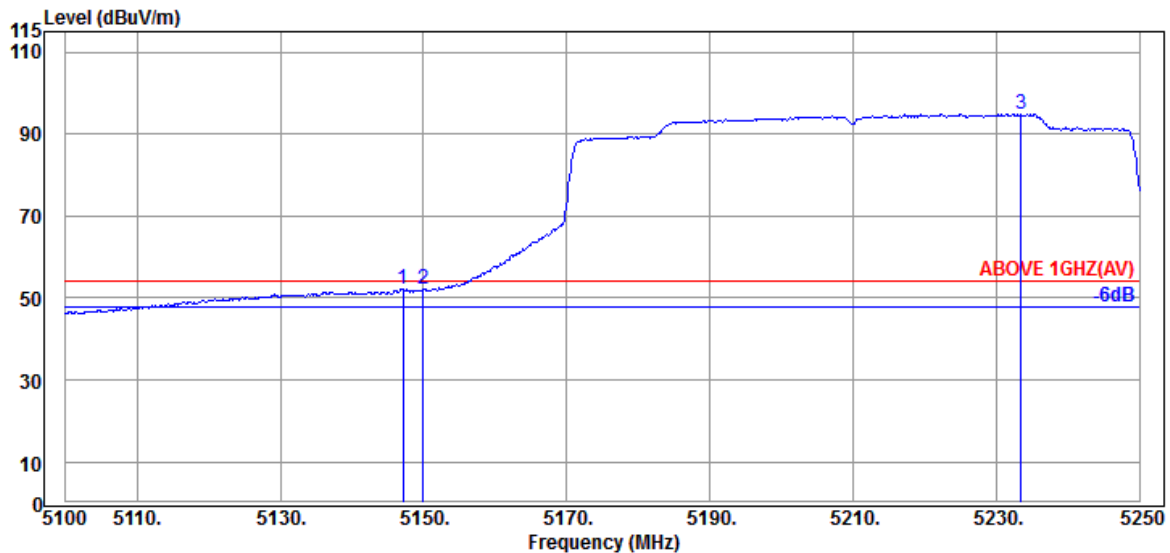


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.20	10.70	34.35	41.64	52.19	54.00	1.81	Average
5149.950	34.20	10.70	34.35	41.46	52.01	54.00	1.99	Average
@ 5233.500	34.35	10.76	34.32	84.05	94.84	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

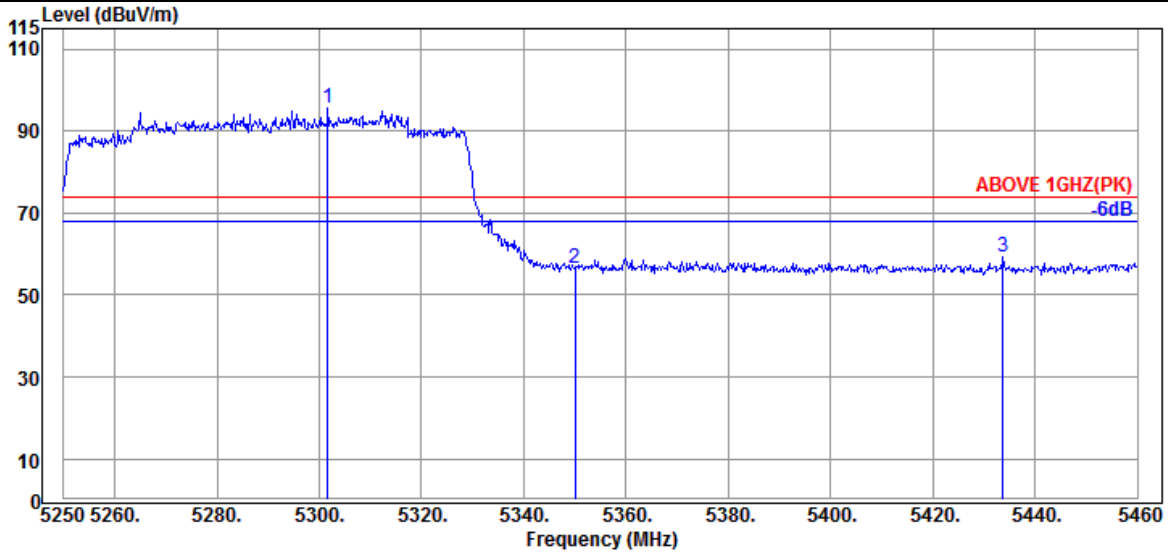

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.660	34.50	10.81	34.29	84.57	95.59	---	---	Peak
5349.960	34.60	10.83	34.27	45.28	56.44	74.00	17.56	Peak
5433.750	34.55	10.89	34.25	47.97	59.16	74.00	14.84	Peak

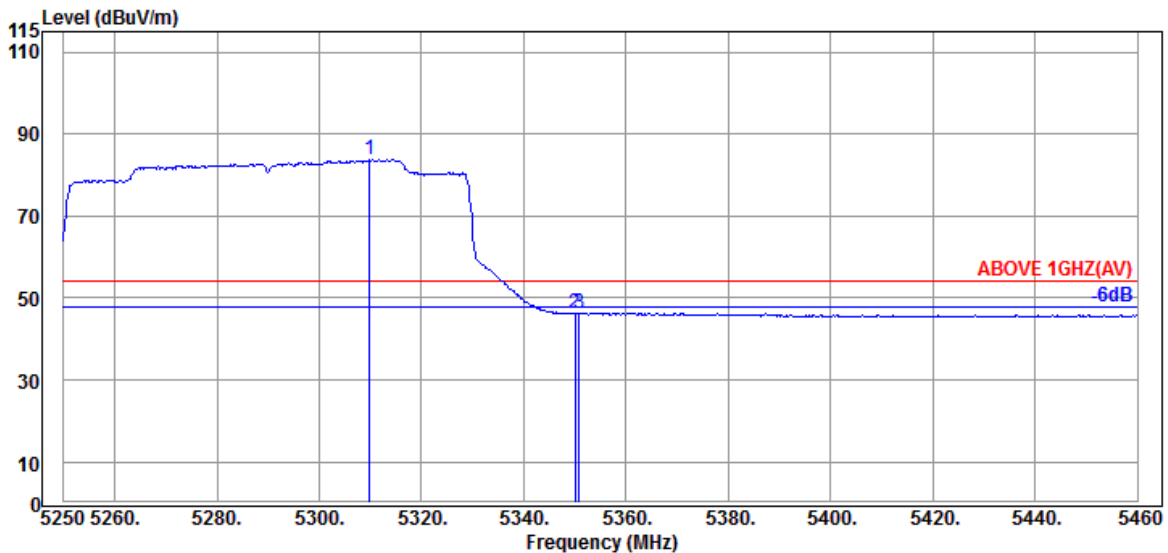


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.850	34.53	10.81	34.29	72.84	83.89	---	---	Average
5349.960	34.60	10.83	34.27	35.11	46.27	54.00	7.73	Average
5350.800	34.60	10.83	34.27	35.27	46.43	54.00	7.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

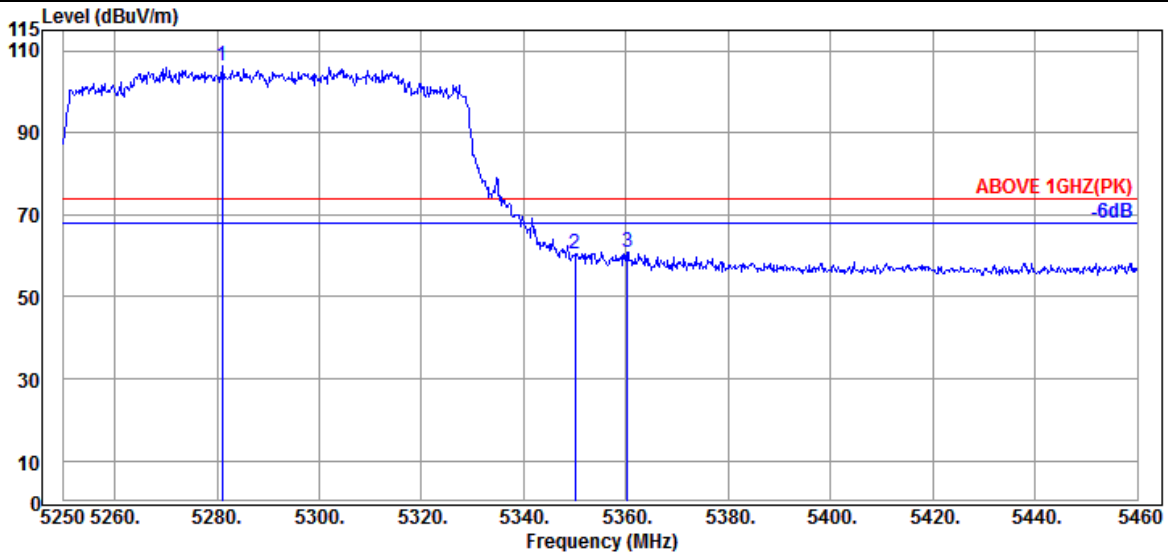

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.080	34.47	10.79	34.30	95.33	106.29	---	---	Peak
5349.960	34.60	10.83	34.27	49.34	60.50	74.00	13.50	Peak
5360.250	34.63	10.85	34.27	49.79	61.00	74.00	13.00	Peak

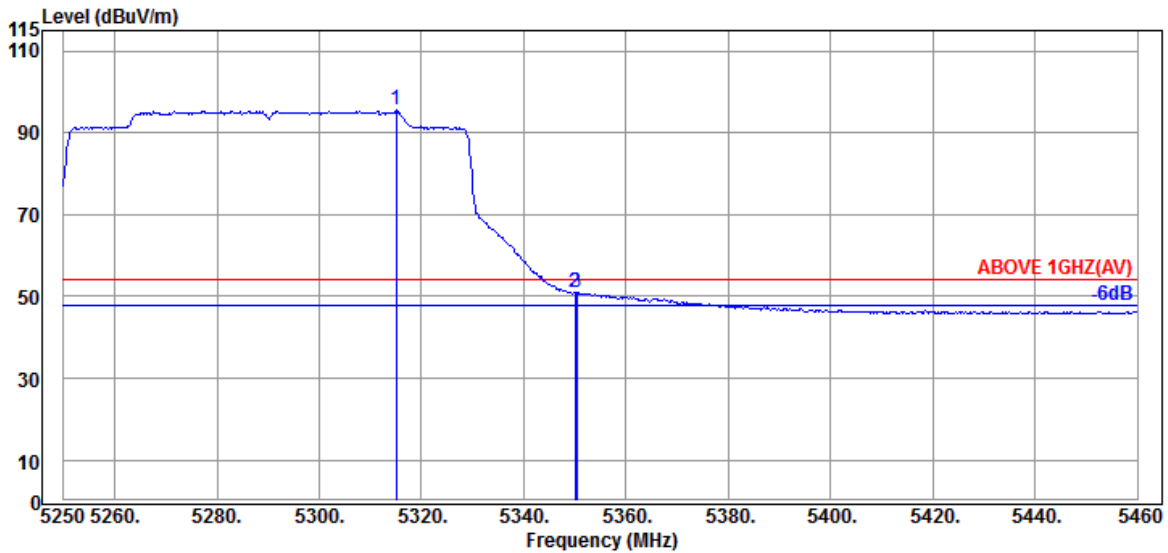


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.100	34.53	10.81	34.29	84.41	95.46	---	---	Average
5349.960	34.60	10.83	34.27	39.73	50.89	54.00	3.11	Average
5350.380	34.60	10.83	34.27	39.79	50.95	54.00	3.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

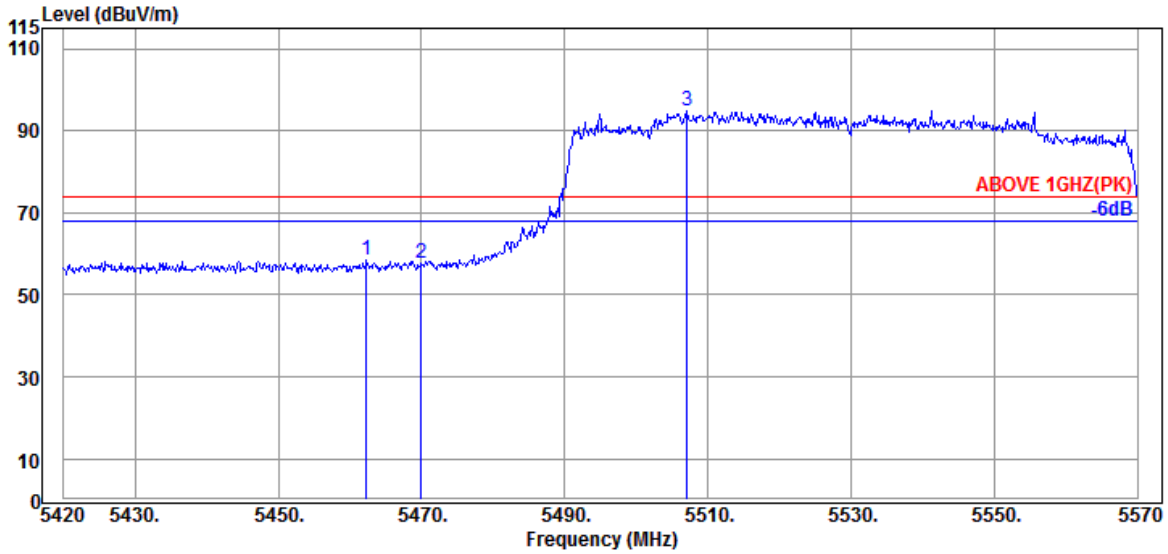

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.50	10.91	34.24	47.19	58.36	74.00	15.64	Peak
5469.950	34.47	10.91	34.24	46.37	57.51	74.00	16.49	Peak
@ 5507.150	34.40	10.93	34.24	83.71	94.80	---	---	Peak

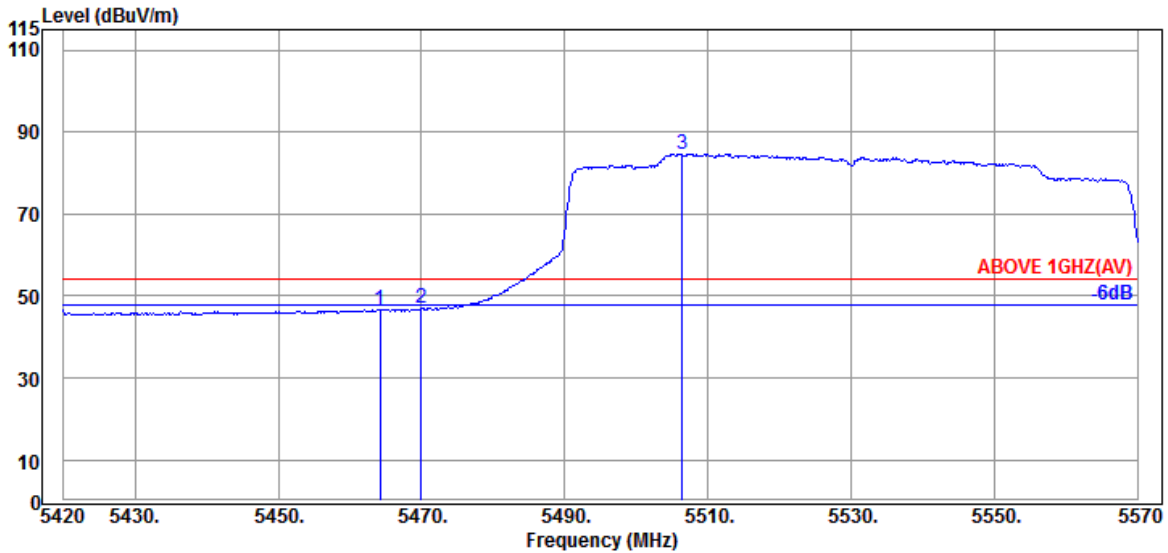


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.250	34.47	10.91	34.24	35.67	46.81	54.00	7.19	Average
5469.950	34.47	10.91	34.24	35.91	47.05	54.00	6.95	Average
@ 5506.400	34.40	10.93	34.24	73.58	84.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

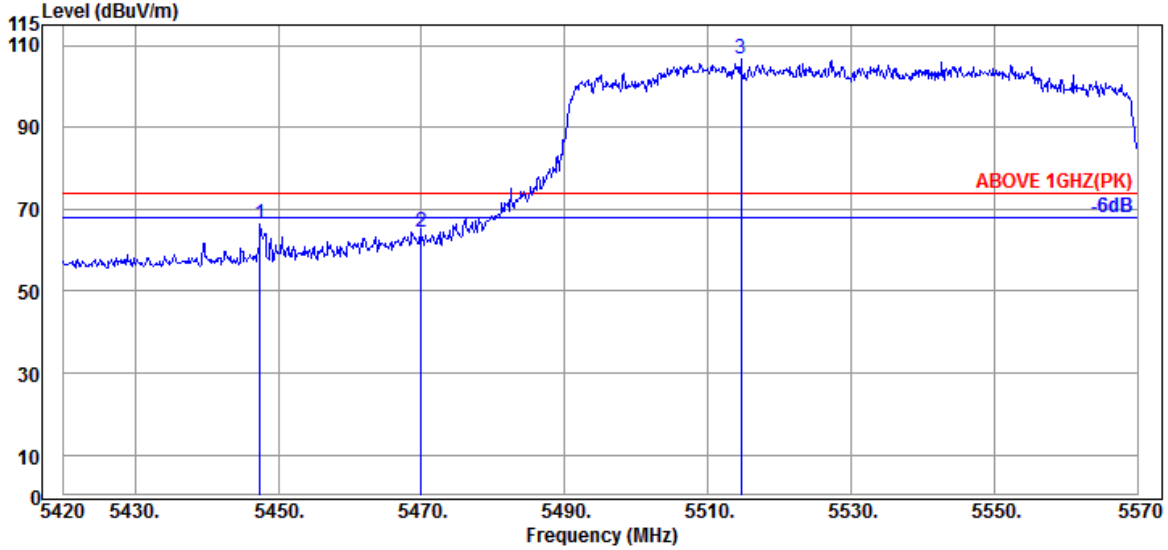

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.450	34.55	10.89	34.25	55.13	66.32	74.00	7.68	Peak
5469.950	34.47	10.91	34.24	53.33	64.47	74.00	9.53	Peak
@ 5514.650	34.37	10.93	34.24	95.48	106.54	---	---	Peak

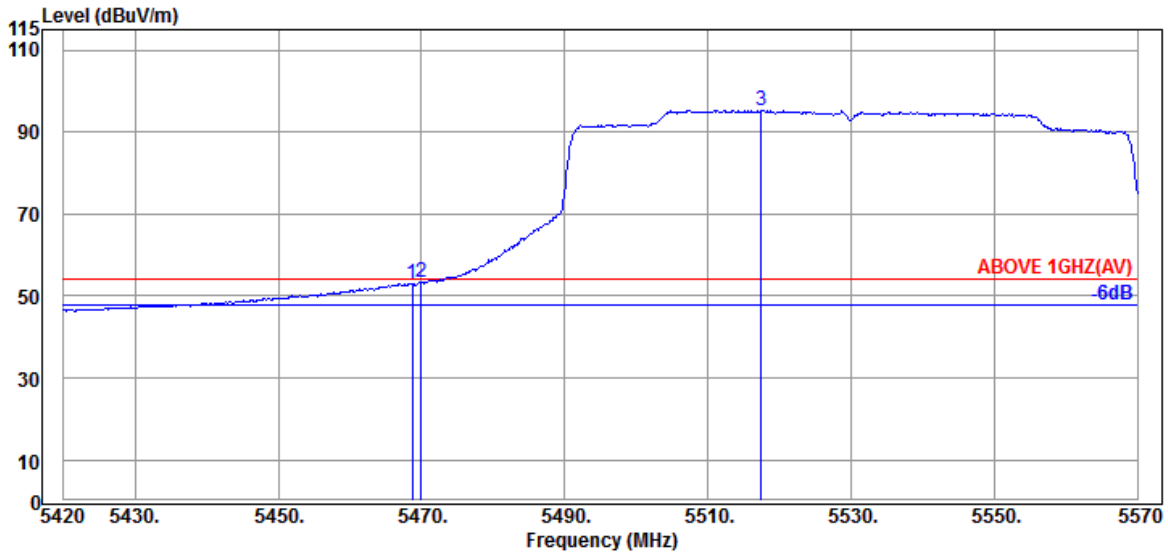


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.47	10.91	34.24	42.00	53.14	54.00	0.86	Average
5469.950	34.47	10.91	34.24	42.23	53.37	54.00	0.63	Average
@ 5517.500	34.37	10.93	34.24	84.22	95.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

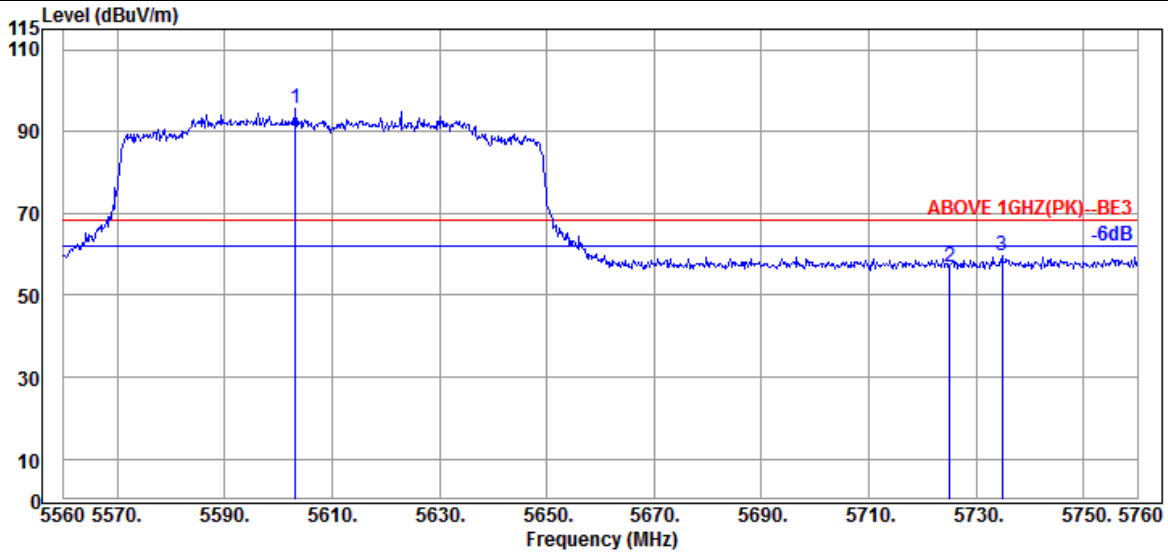

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5603.200	34.40	10.99	34.28	84.50	95.61	---	---	Peak
5725.000	34.67	11.05	34.32	45.37	56.77	68.20	11.43	Peak
5734.800	34.67	11.05	34.33	48.38	59.77	68.20	8.43	Peak

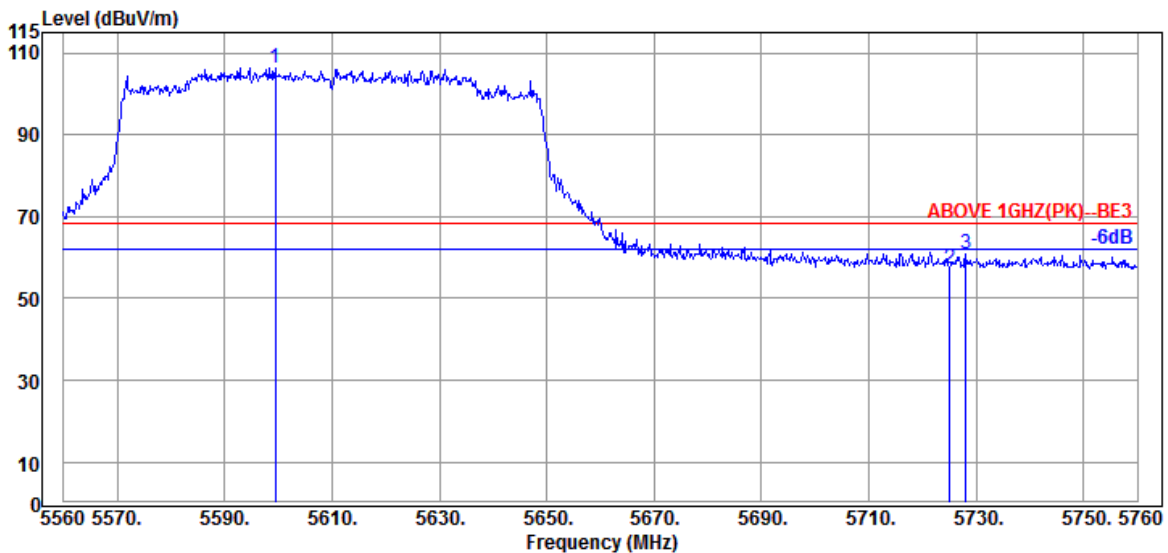


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5599.400	34.40	10.97	34.27	95.20	106.30	---	---	Peak
5725.000	34.67	11.05	34.32	45.91	57.31	68.20	10.89	Peak
5728.000	34.67	11.05	34.32	49.46	60.86	68.20	7.34	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

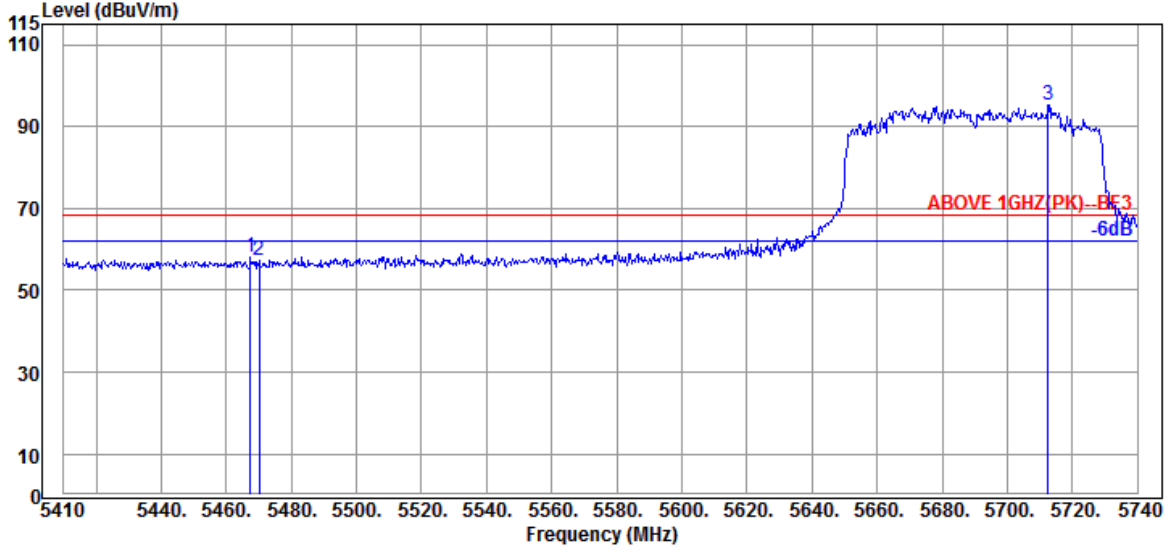

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.420	34.47	10.91	34.24	46.78	57.92	68.20	10.28	Peak
5470.060	34.47	10.91	34.24	46.35	57.49	68.20	10.71	Peak
@ 5712.610	34.53	11.05	34.32	83.98	95.24	---	---	Peak

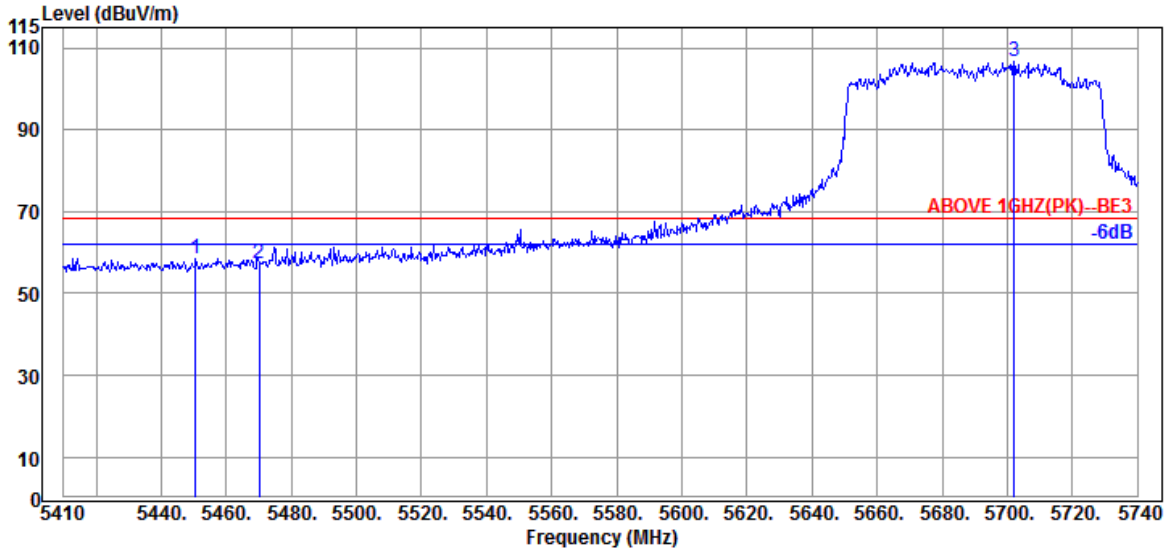


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.590	34.50	10.89	34.24	47.44	58.59	68.20	9.61	Peak
5470.060	34.47	10.91	34.24	46.11	57.25	68.20	10.95	Peak
@ 5702.050	34.40	11.03	34.31	95.62	106.74	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

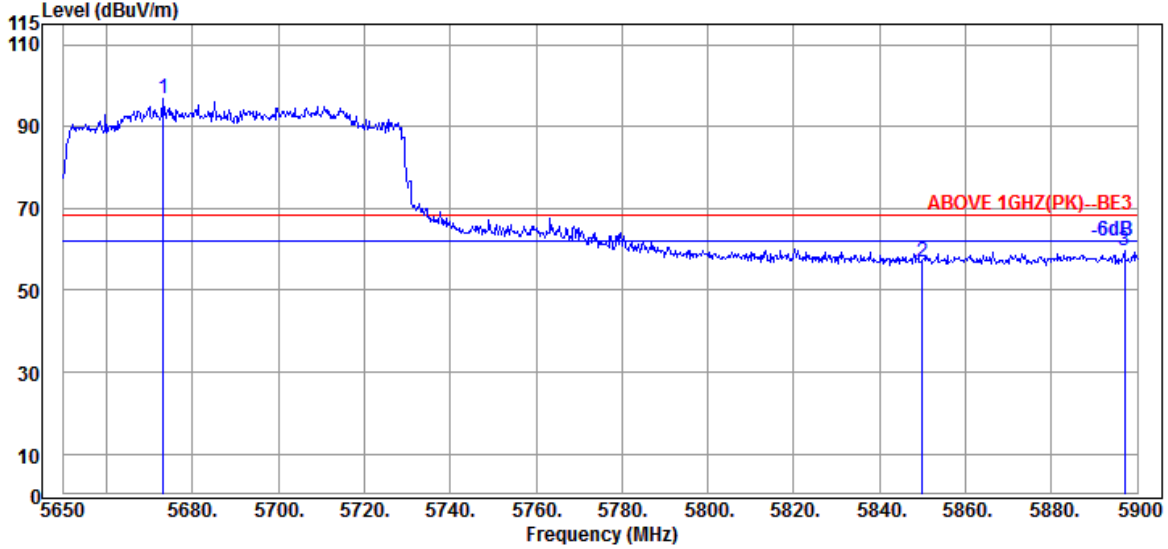

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.250	34.40	11.03	34.30	85.81	96.94	---	---	Peak
5850.000	35.10	11.10	34.38	45.11	56.93	68.20	11.27	Peak
5897.000	35.40	11.14	34.40	47.39	59.53	68.20	8.67	Peak

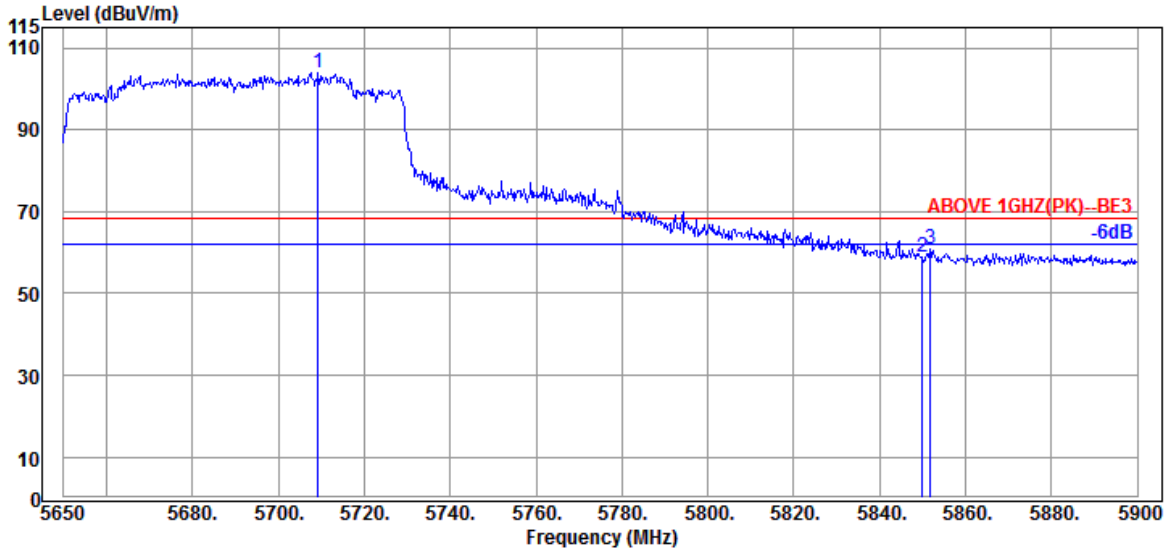


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5709.250	34.53	11.03	34.32	92.78	104.02	---	---	Peak
5850.000	35.10	11.10	34.38	47.20	59.02	68.20	9.18	Peak
5851.750	35.10	11.10	34.38	49.17	60.99	68.20	7.21	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

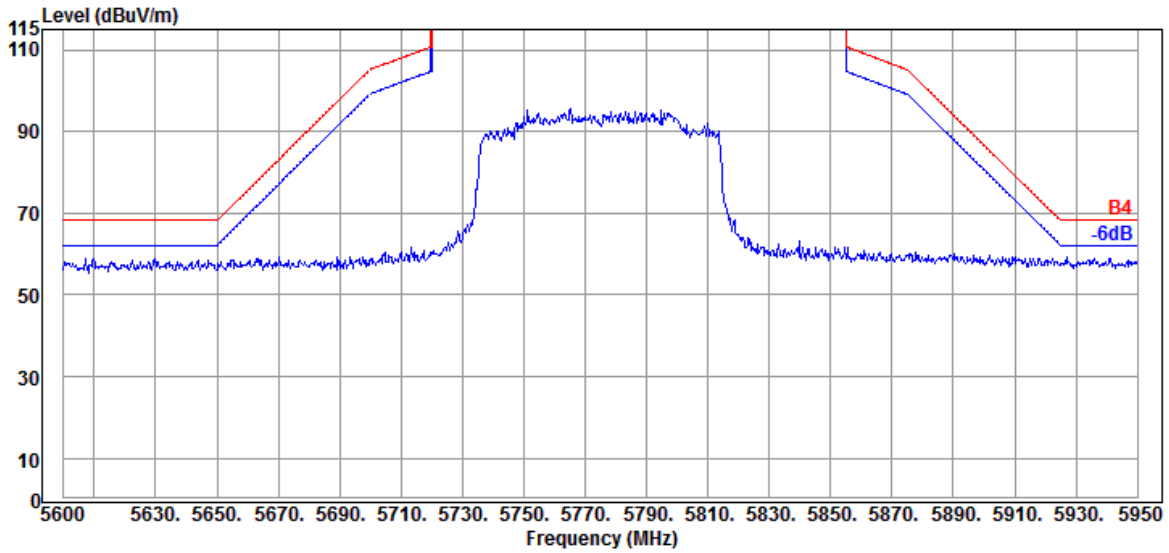

Antenna at Vertical Polarization

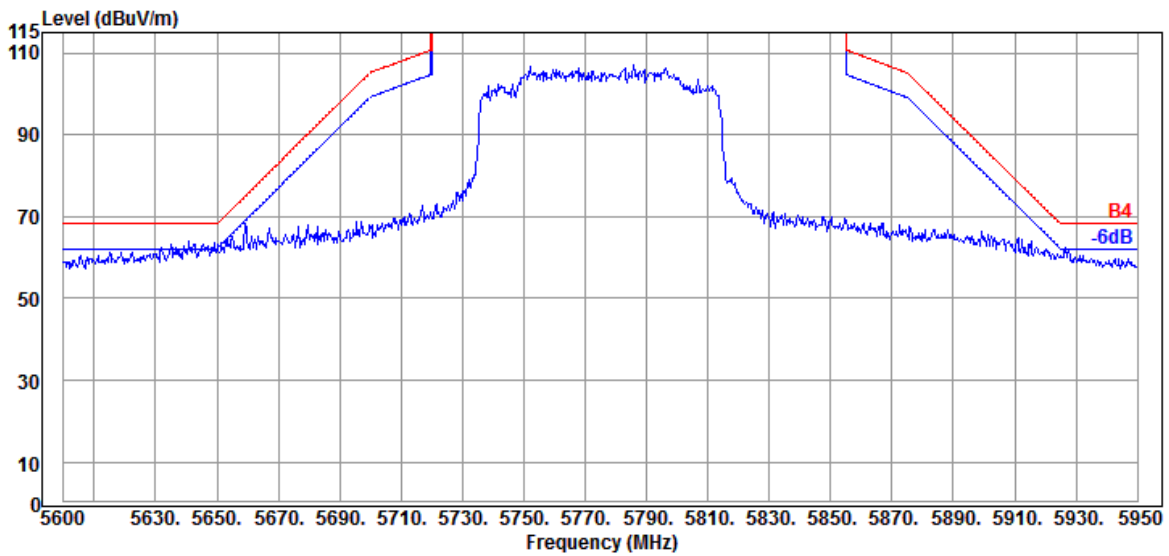


Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

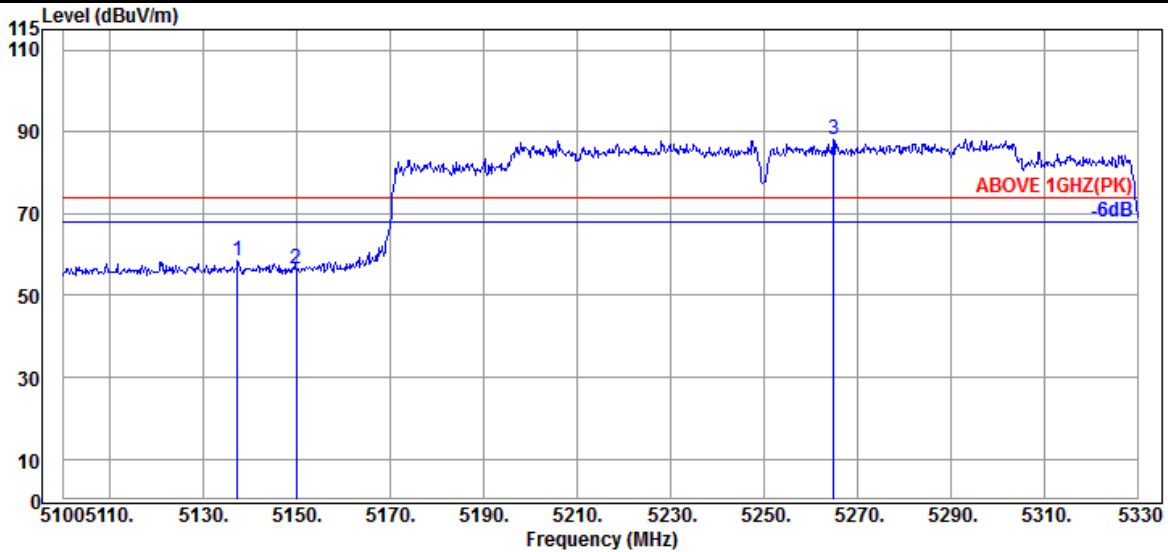

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.260	34.17	10.70	34.36	47.85	58.36	74.00	15.64	Peak
5149.910	34.20	10.70	34.35	46.09	56.64	74.00	17.36	Peak
@ 5264.910	34.43	10.79	34.31	77.26	88.17	---	---	Peak

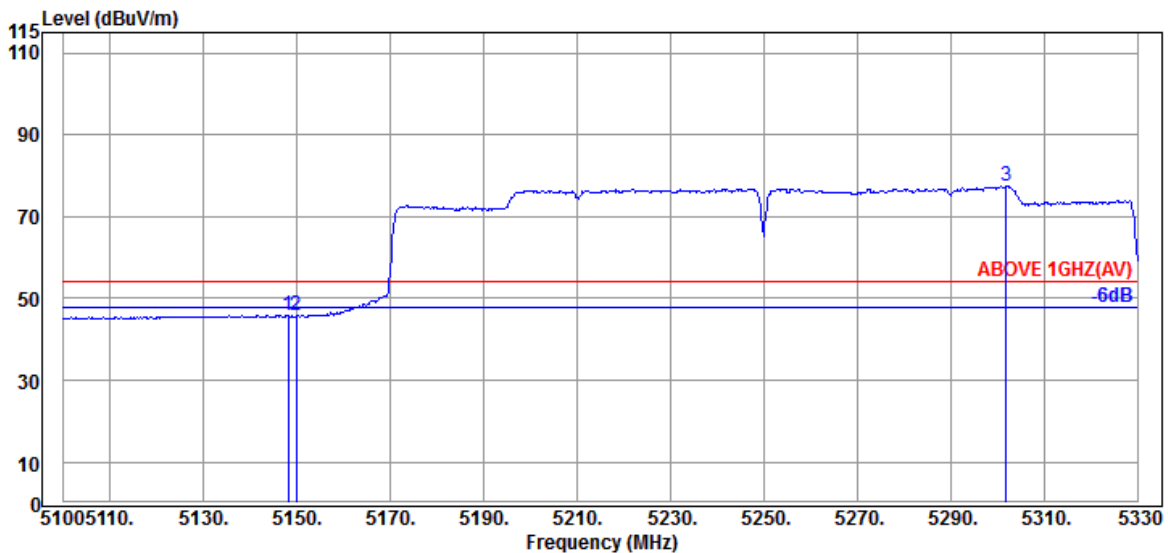


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.070	34.20	10.70	34.35	35.34	45.89	54.00	8.11	Average
5149.910	34.20	10.70	34.35	35.26	45.81	54.00	8.19	Average
@ 5301.940	34.50	10.81	34.29	66.46	77.48	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

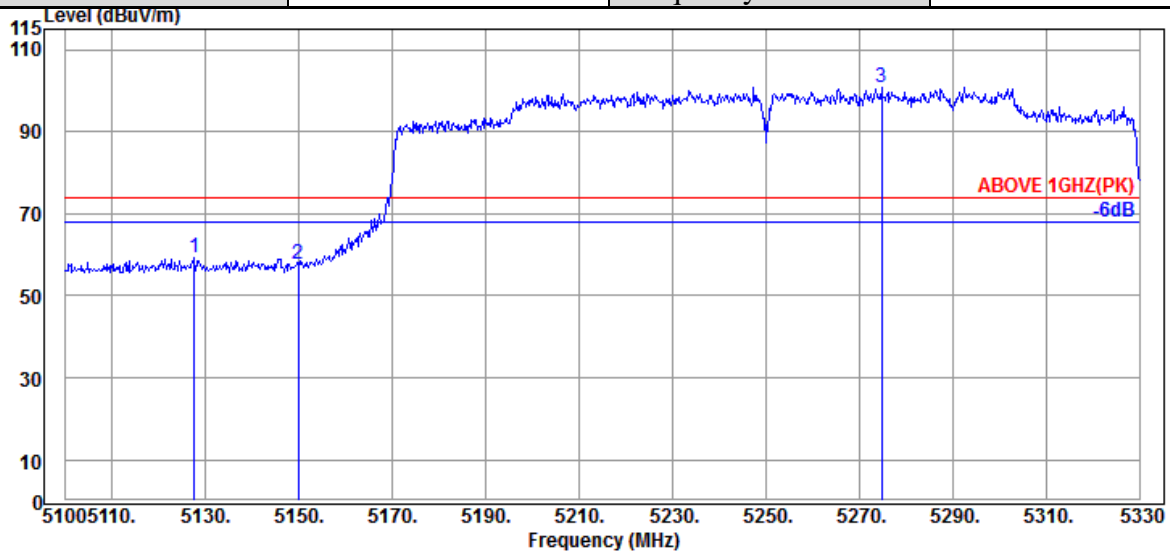

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.600	34.17	10.70	34.36	48.64	59.15	74.00	14.85	Peak
5149.910	34.20	10.70	34.35	47.22	57.77	74.00	16.23	Peak
@ 5274.800	34.43	10.79	34.30	89.98	100.90	---	---	Peak

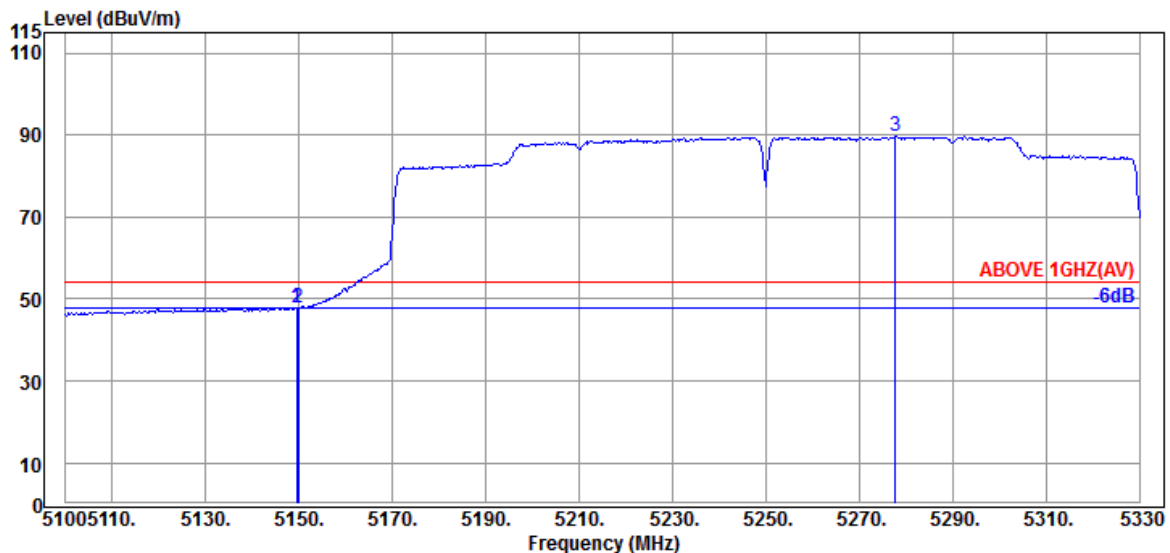


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.20	10.70	34.35	37.37	47.92	54.00	6.08	Average
5149.910	34.20	10.70	34.35	37.40	47.95	54.00	6.05	Average
@ 5277.790	34.47	10.79	34.30	78.63	89.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

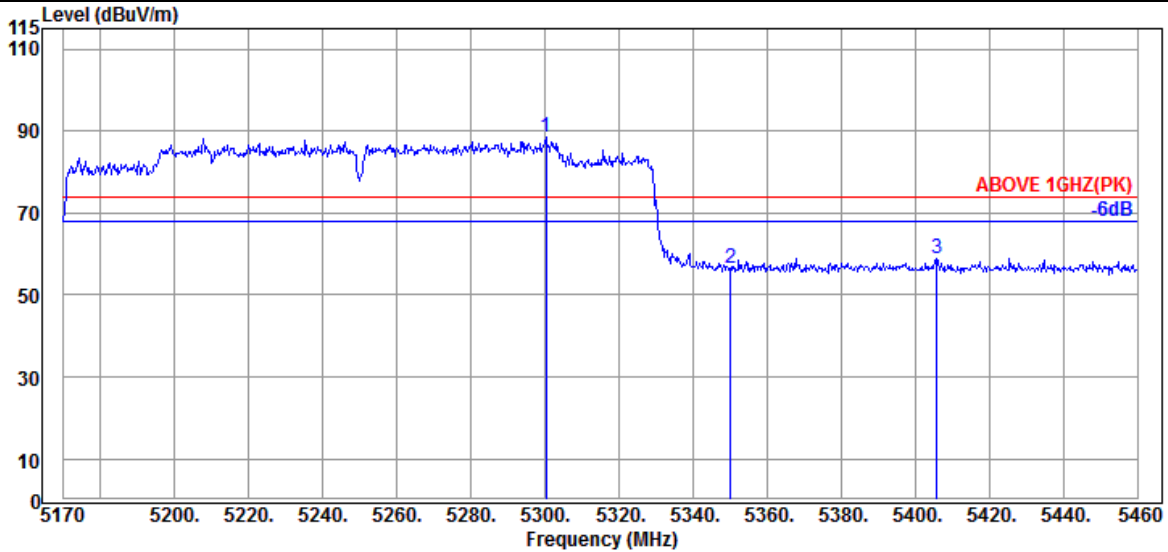

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5300.210	34.50	10.81	34.29	77.34	88.36	---	---	Peak
5350.090	34.60	10.83	34.27	45.44	56.60	74.00	17.40	Peak
5405.770	34.65	10.87	34.26	47.53	58.79	74.00	15.21	Peak

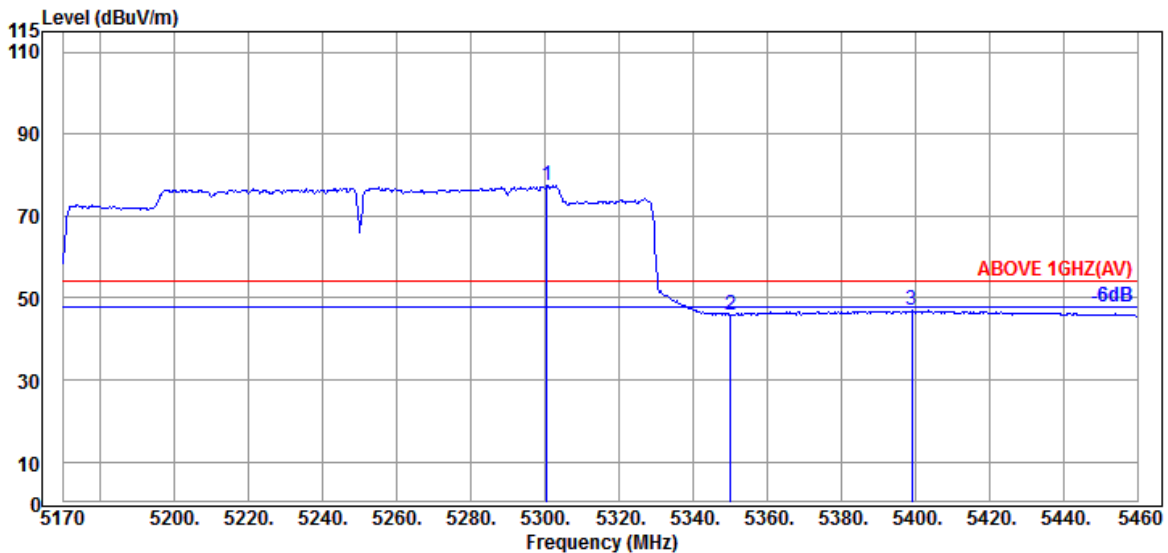


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5300.500	34.50	10.81	34.29	66.38	77.40	---	---	Average
5350.090	34.60	10.83	34.27	34.77	45.93	54.00	8.07	Average
5399.100	34.70	10.87	34.26	35.59	46.90	54.00	7.10	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

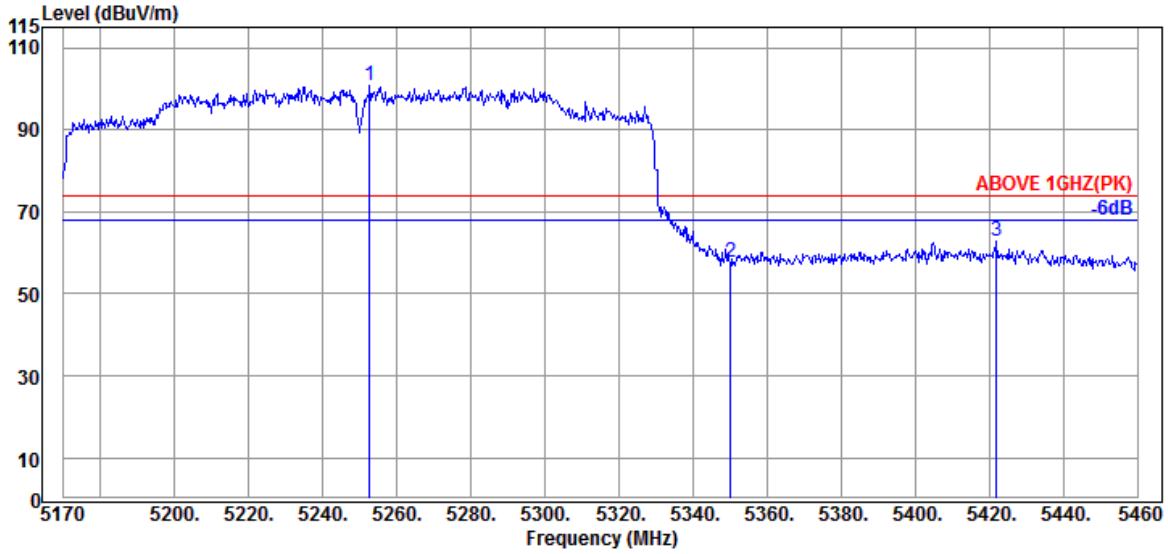

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5252.650	34.40	10.76	34.31	89.89	100.74	---	---	Peak
5350.090	34.60	10.83	34.27	46.38	57.54	74.00	16.46	Peak
5422.010	34.60	10.87	34.26	51.47	62.68	74.00	11.32	Peak

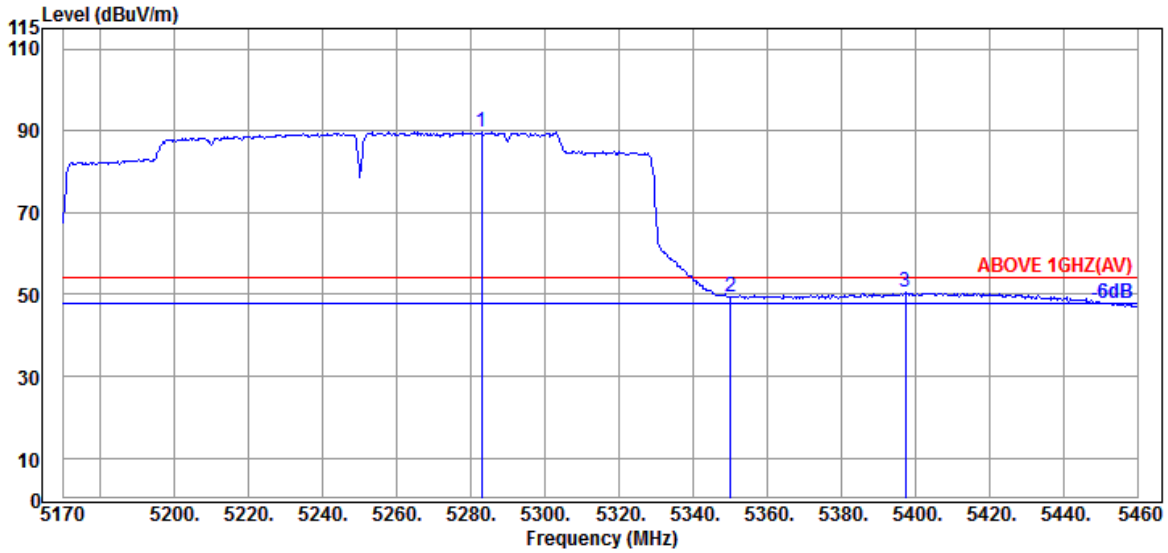


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.810	34.47	10.79	34.30	78.68	89.64	---	---	Average
5350.090	34.60	10.83	34.27	38.27	49.43	54.00	4.57	Average
5397.360	34.70	10.87	34.27	39.14	50.44	54.00	3.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

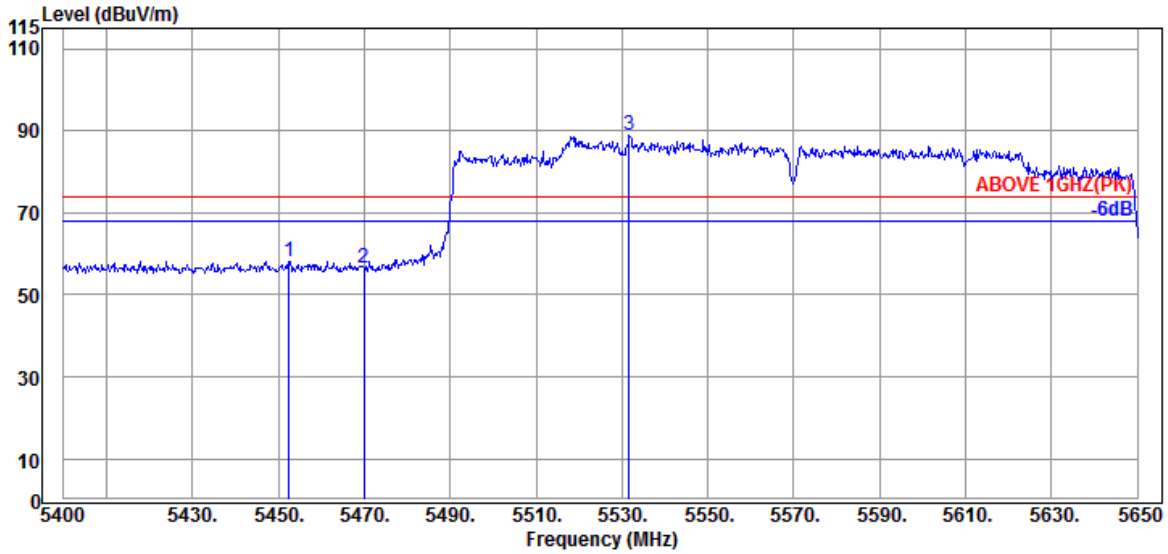

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.500	34.50	10.89	34.24	47.08	58.23	74.00	15.77	Peak
5470.000	34.47	10.91	34.24	45.19	56.33	74.00	17.67	Peak
@ 5531.750	34.33	10.95	34.25	78.05	89.08	---	---	Peak

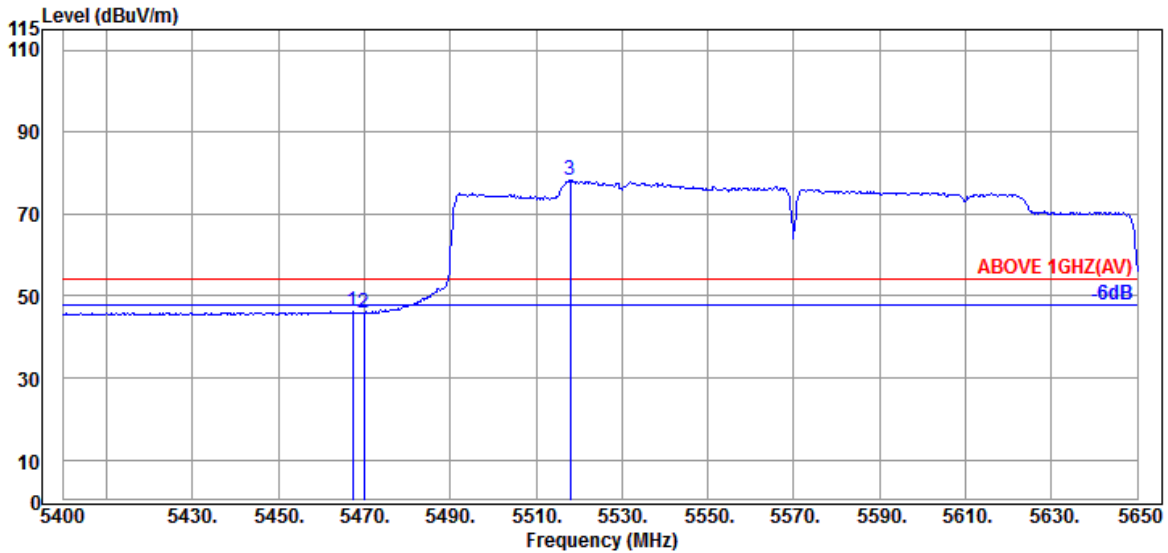


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.47	10.91	34.24	34.93	46.07	54.00	7.93	Average
5470.000	34.47	10.91	34.24	34.76	45.90	54.00	8.10	Average
@ 5518.000	34.37	10.93	34.24	67.18	78.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

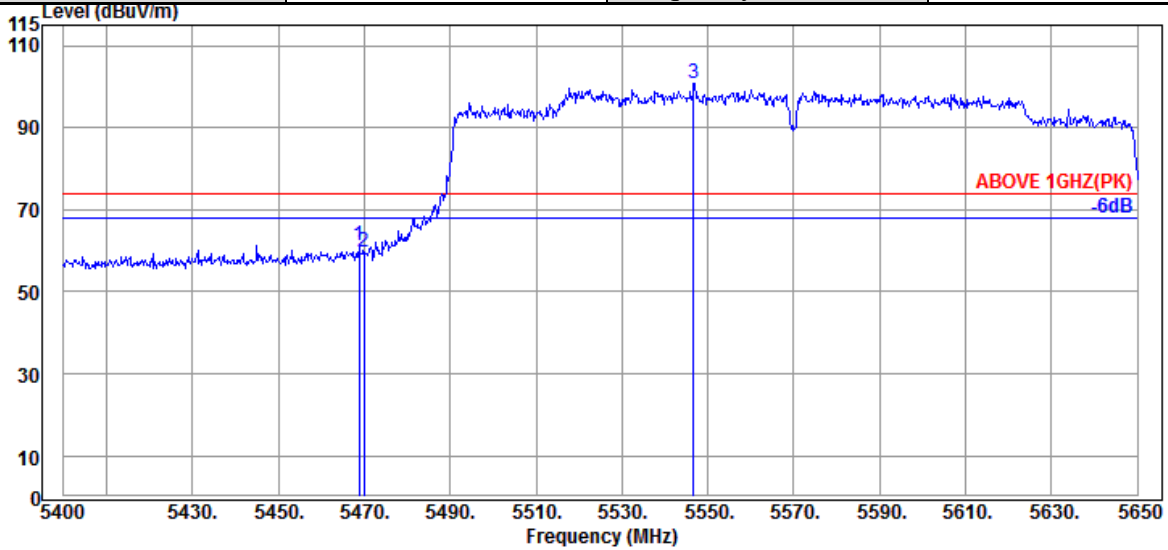

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.47	10.91	34.24	50.08	61.22	74.00	12.78	Peak
5470.000	34.47	10.91	34.24	48.38	59.52	74.00	14.48	Peak
@ 5546.750	34.30	10.95	34.25	89.65	100.65	---	---	Peak

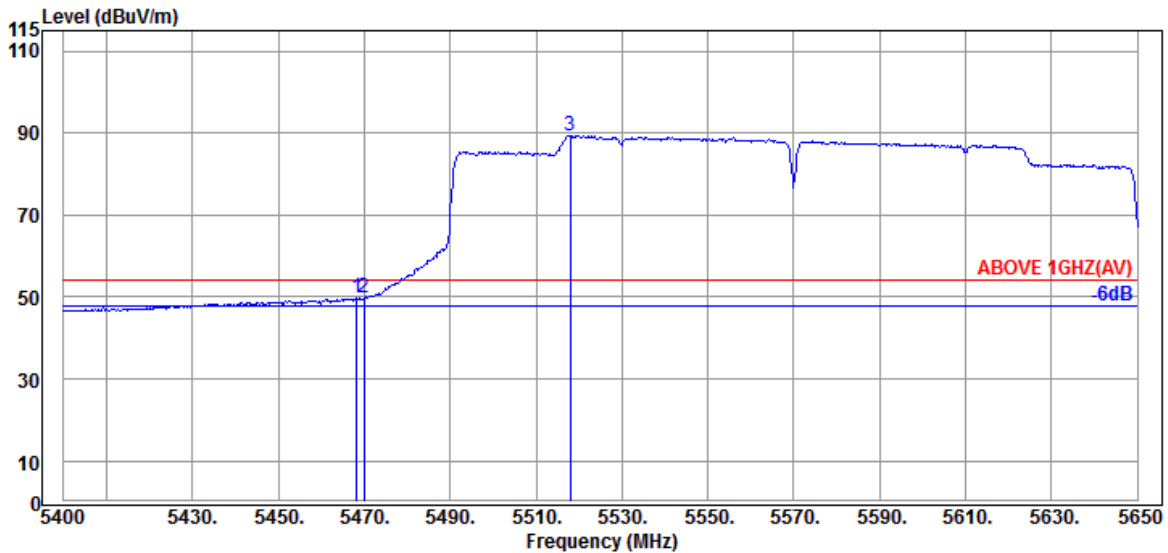


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.250	34.47	10.91	34.24	38.56	49.70	54.00	4.30	Average
5470.000	34.47	10.91	34.24	38.50	49.64	54.00	4.36	Average
@ 5518.000	34.37	10.93	34.24	78.43	89.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

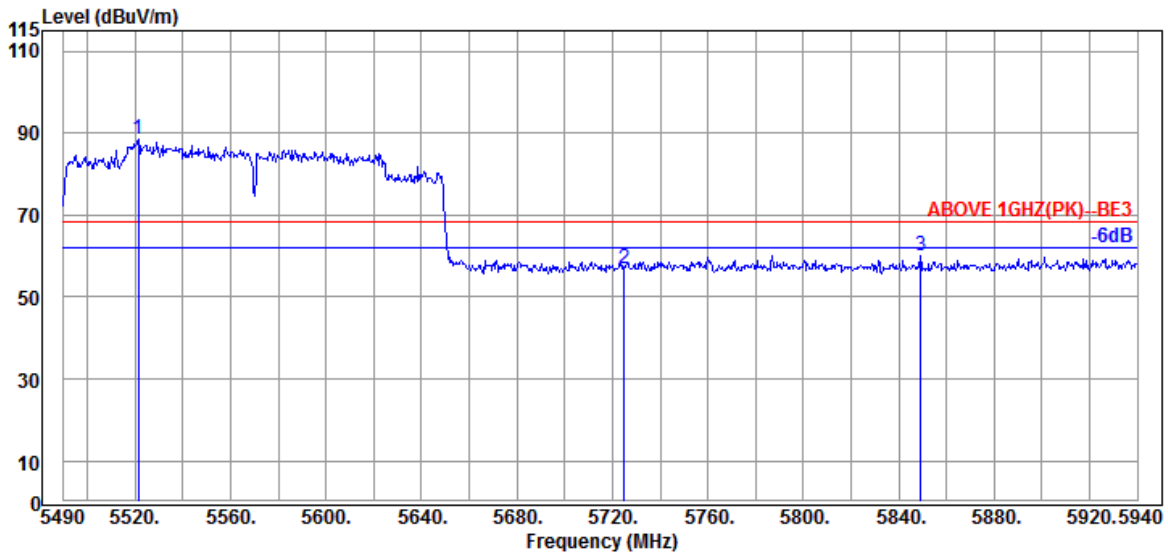

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5521.500	34.37	10.93	34.24	77.57	88.63	---	---	Peak
5724.900	34.67	11.05	34.32	45.39	56.79	68.20	11.41	Peak
5849.100	35.10	11.10	34.38	48.42	60.24	68.20	7.96	Peak

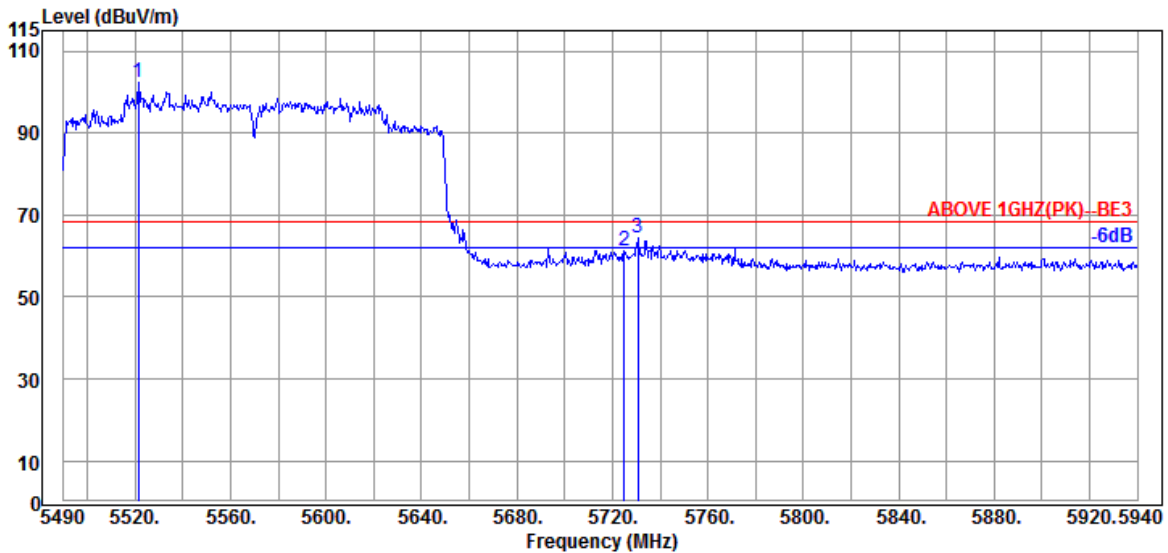


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5521.500	34.37	10.93	34.24	91.30	102.36	---	---	Peak
5724.900	34.67	11.05	34.32	49.83	61.23	68.20	6.97	Peak
5730.750	34.67	11.05	34.33	52.90	64.29	68.20	3.91	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

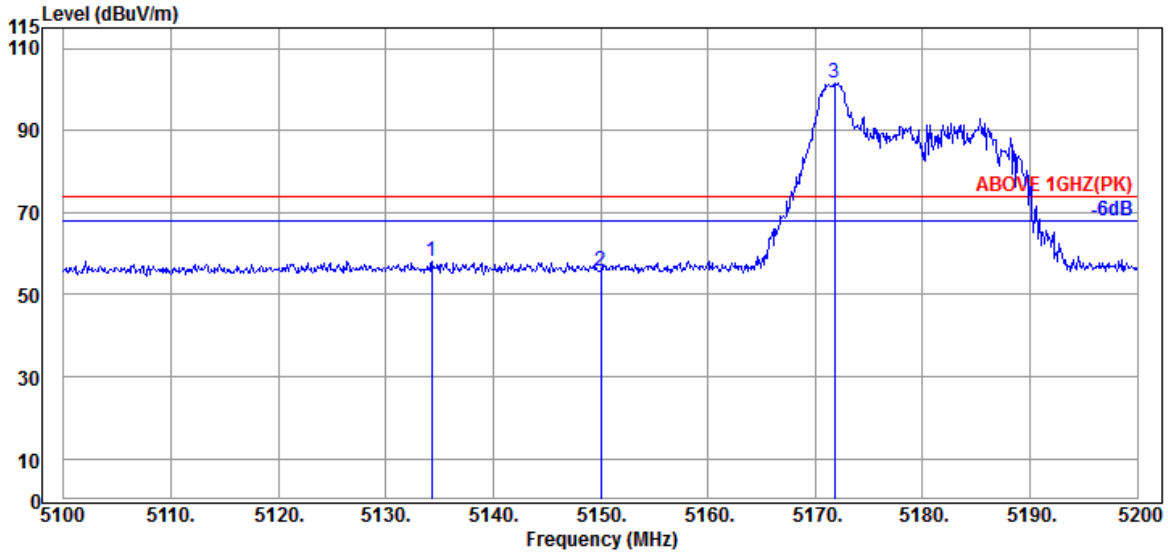

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.300	34.17	10.70	34.36	47.69	58.20	74.00	15.80	Peak
5150.000	34.20	10.70	34.35	45.34	55.89	74.00	18.11	Peak
@ 5171.800	34.20	10.72	34.34	91.11	101.69	---	---	Peak

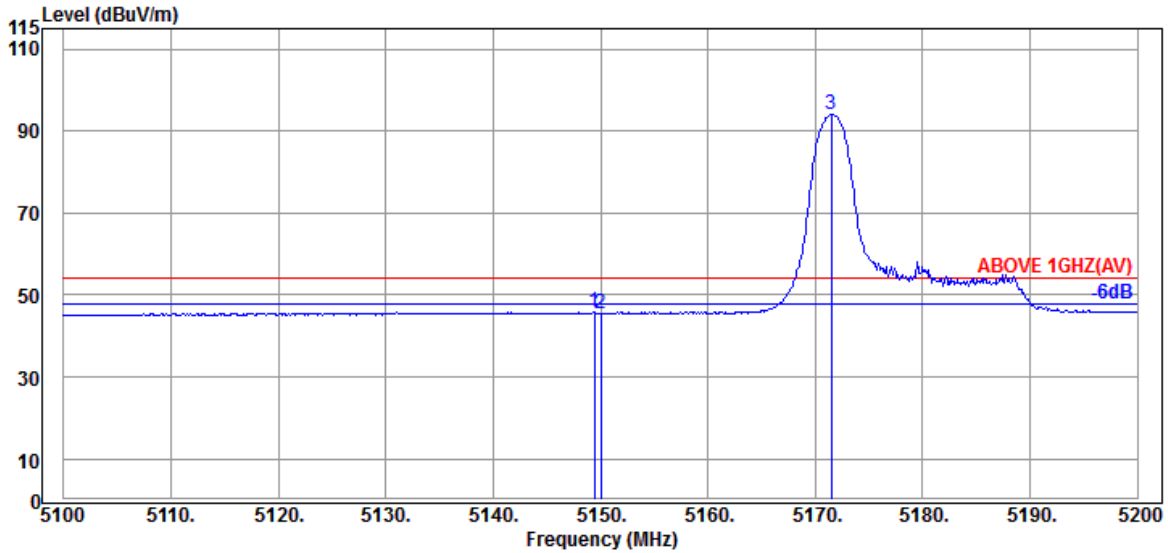


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.20	10.70	34.35	35.27	45.82	54.00	8.18	Average
5150.000	34.20	10.70	34.35	34.98	45.53	54.00	8.47	Average
@ 5171.500	34.20	10.72	34.34	83.46	94.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

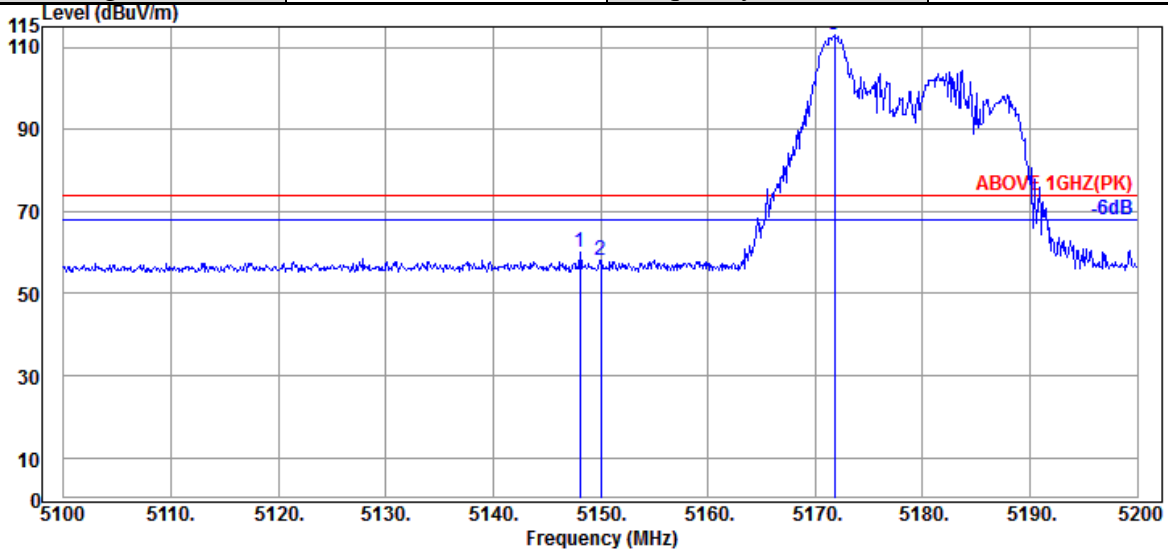

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.20	10.70	34.35	49.34	59.89	74.00	14.11	Peak
5150.000	34.20	10.70	34.35	47.53	58.08	74.00	15.92	Peak
@ 5171.800	34.20	10.72	34.34	102.44	113.02	---	---	Peak

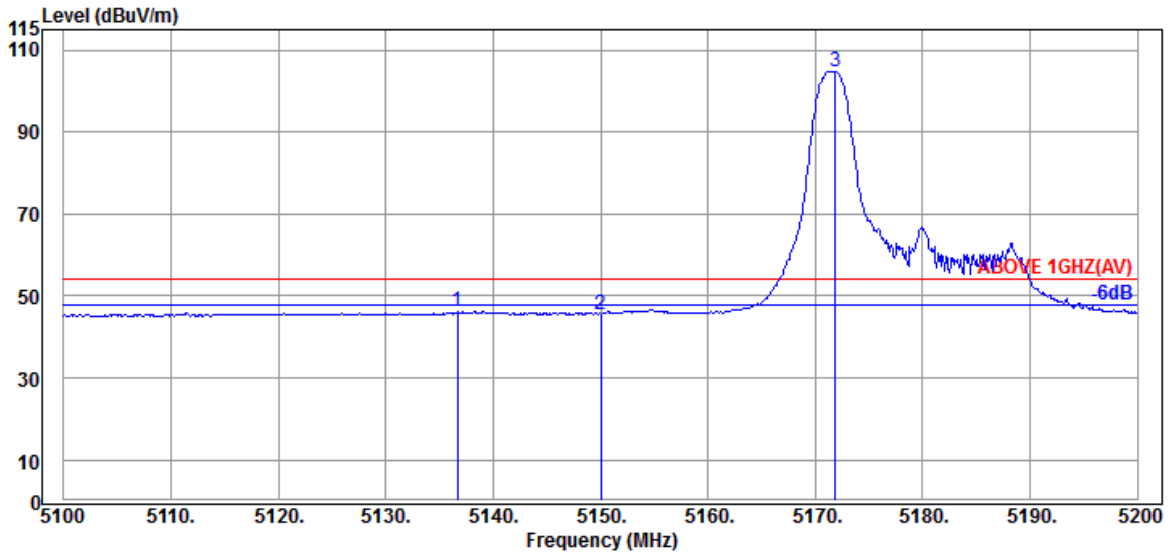


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.700	34.17	10.70	34.36	35.80	46.31	54.00	7.69	Average
5150.000	34.20	10.70	34.35	35.05	45.60	54.00	8.40	Average
@ 5171.900	34.20	10.72	34.34	94.30	104.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

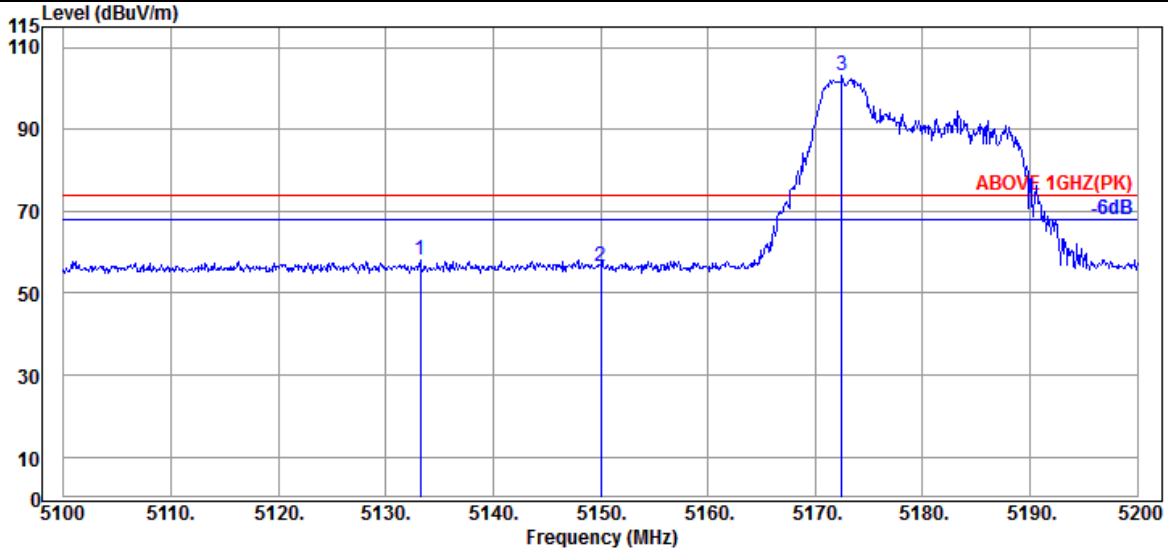

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.200	34.17	10.70	34.36	47.55	58.06	74.00	15.94	Peak
5150.000	34.20	10.70	34.35	46.16	56.71	74.00	17.29	Peak
@ 5172.500	34.20	10.72	34.34	92.45	103.03	---	---	Peak

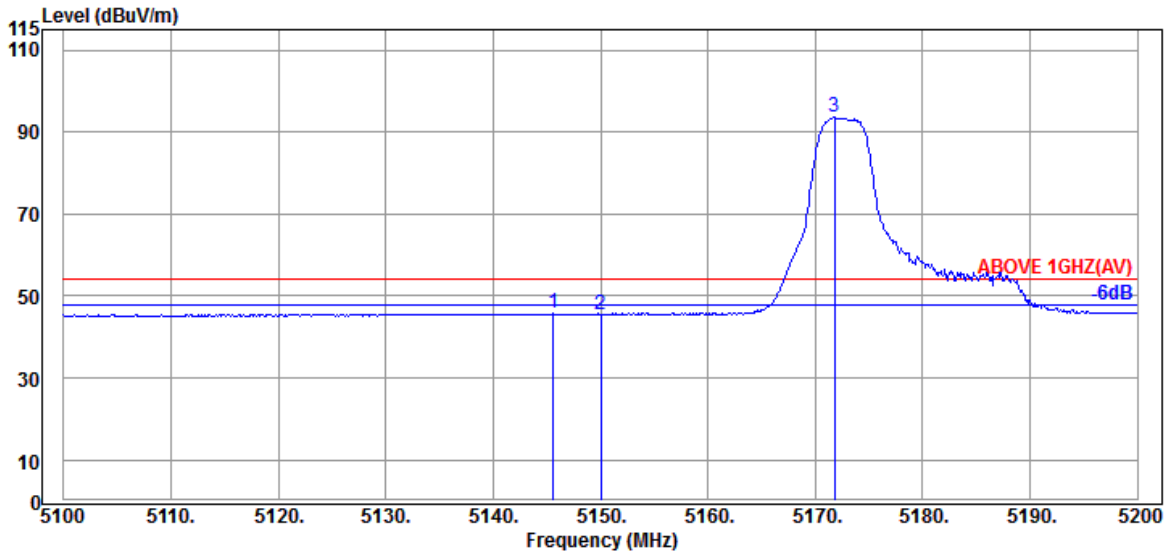


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	34.20	10.70	34.35	35.17	45.72	54.00	8.28	Average
5150.000	34.20	10.70	34.35	34.87	45.42	54.00	8.58	Average
@ 5171.800	34.20	10.72	34.34	82.98	93.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

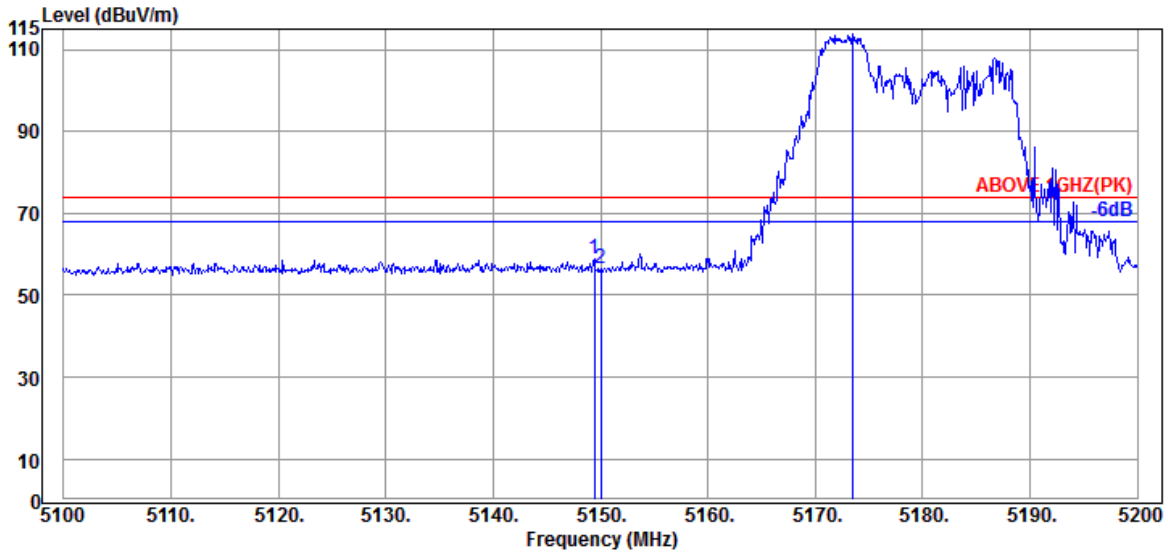

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.20	10.70	34.35	48.23	58.78	74.00	15.22	Peak
5150.000	34.20	10.70	34.35	46.07	56.62	74.00	17.38	Peak
@ 5173.500	34.20	10.72	34.34	103.22	113.80	---	---	Peak

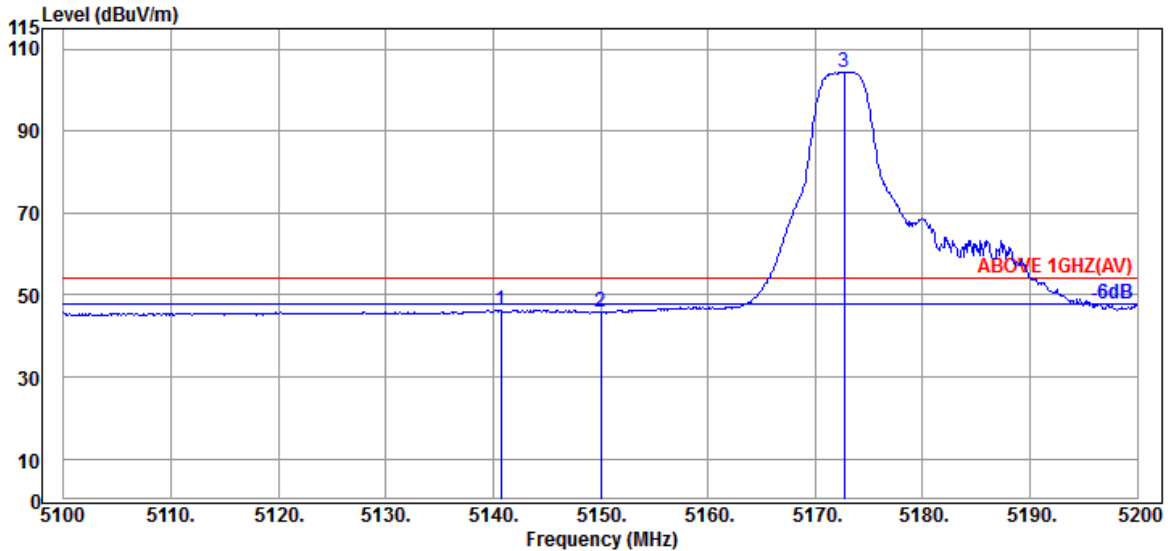


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.700	34.17	10.70	34.36	35.81	46.32	54.00	7.68	Average
5150.000	34.20	10.70	34.35	35.18	45.73	54.00	8.27	Average
@ 5172.700	34.20	10.72	34.34	93.90	104.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

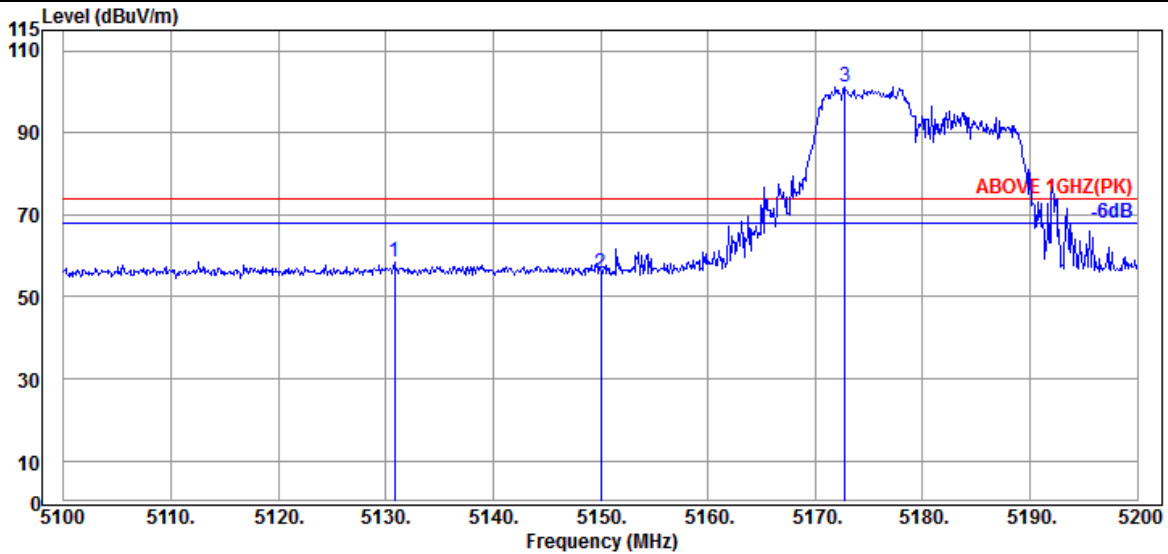

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.800	34.17	10.70	34.36	47.85	58.36	74.00	15.64	Peak
5150.000	34.20	10.70	34.35	45.23	55.78	74.00	18.22	Peak
@ 5172.800	34.20	10.72	34.34	90.71	101.29	---	---	Peak

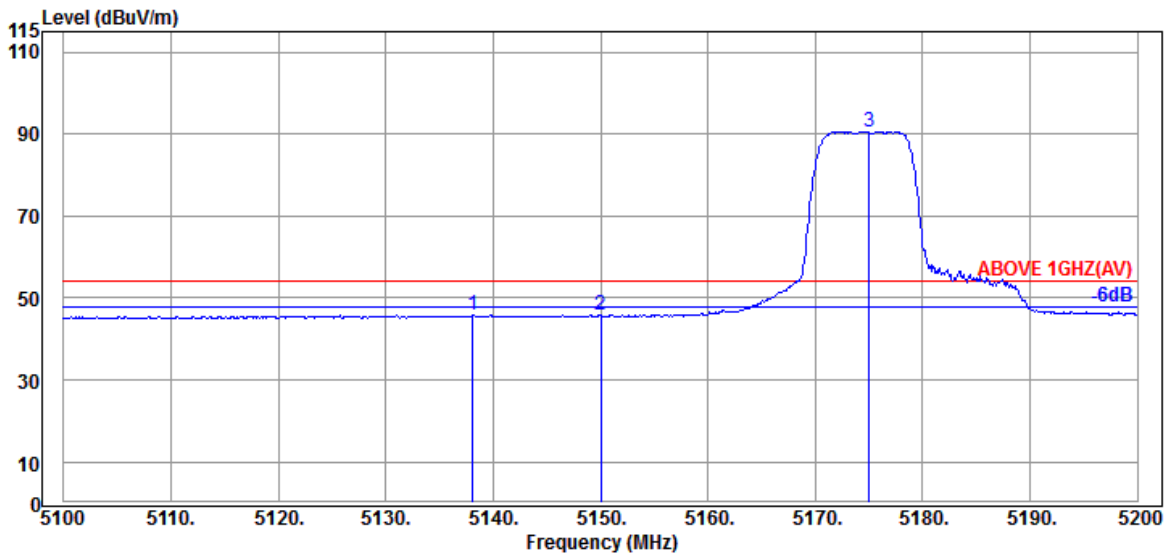


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.100	34.17	10.70	34.36	35.32	45.83	54.00	8.17	Average
5150.000	34.20	10.70	34.35	35.16	45.71	54.00	8.29	Average
@ 5175.000	34.20	10.72	34.34	79.99	90.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

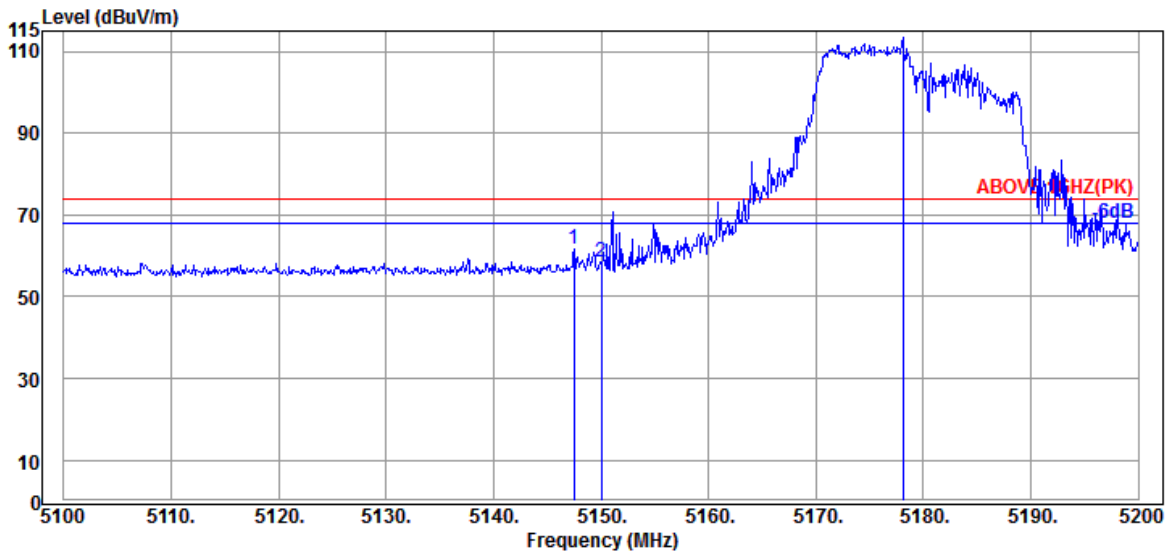

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	34.20	10.70	34.35	51.11	61.66	74.00	12.34	Peak
5150.000	34.20	10.70	34.35	47.96	58.51	74.00	15.49	Peak
@ 5178.100	34.20	10.72	34.34	102.65	113.23	---	---	Peak

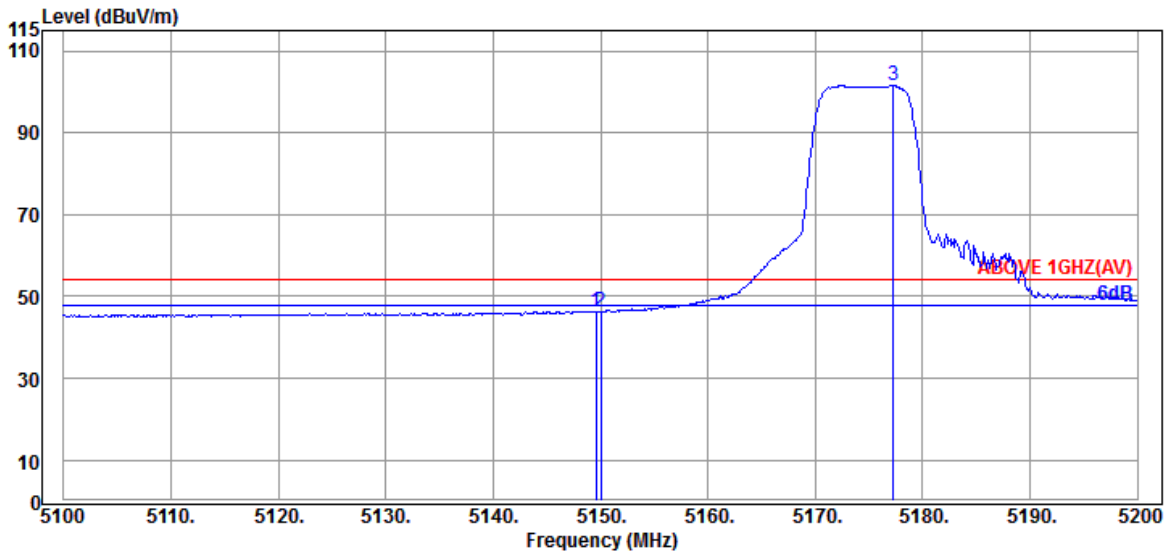


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	10.70	34.35	35.79	46.34	54.00	7.66	Average
5150.000	34.20	10.70	34.35	35.81	46.36	54.00	7.64	Average
@ 5177.300	34.20	10.72	34.34	91.16	101.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

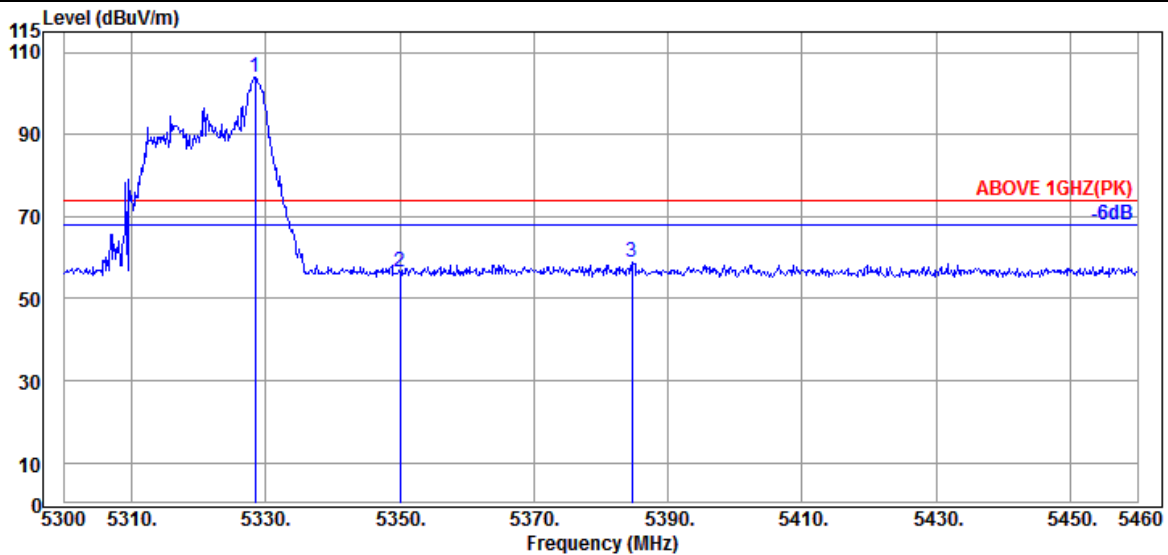

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.480	34.57	10.83	34.28	92.75	103.87	---	---	Peak
5350.080	34.60	10.83	34.27	45.53	56.69	74.00	17.31	Peak
5384.640	34.67	10.85	34.27	47.70	58.95	74.00	15.05	Peak

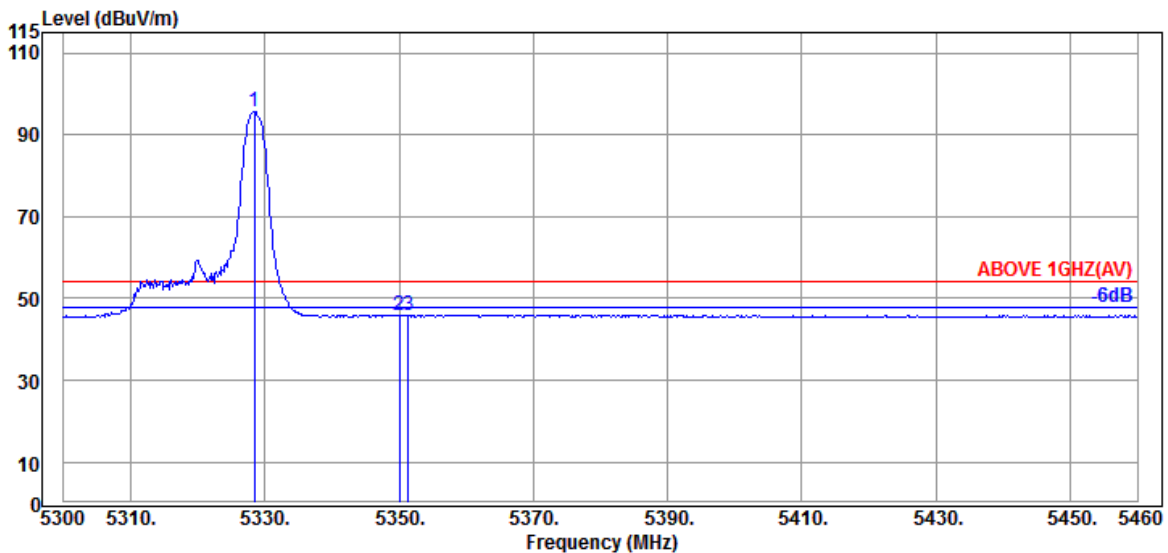


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.480	34.57	10.83	34.28	84.53	95.65	---	---	Average
5350.080	34.60	10.83	34.27	34.52	45.68	54.00	8.32	Average
5351.360	34.60	10.83	34.27	34.80	45.96	54.00	8.04	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

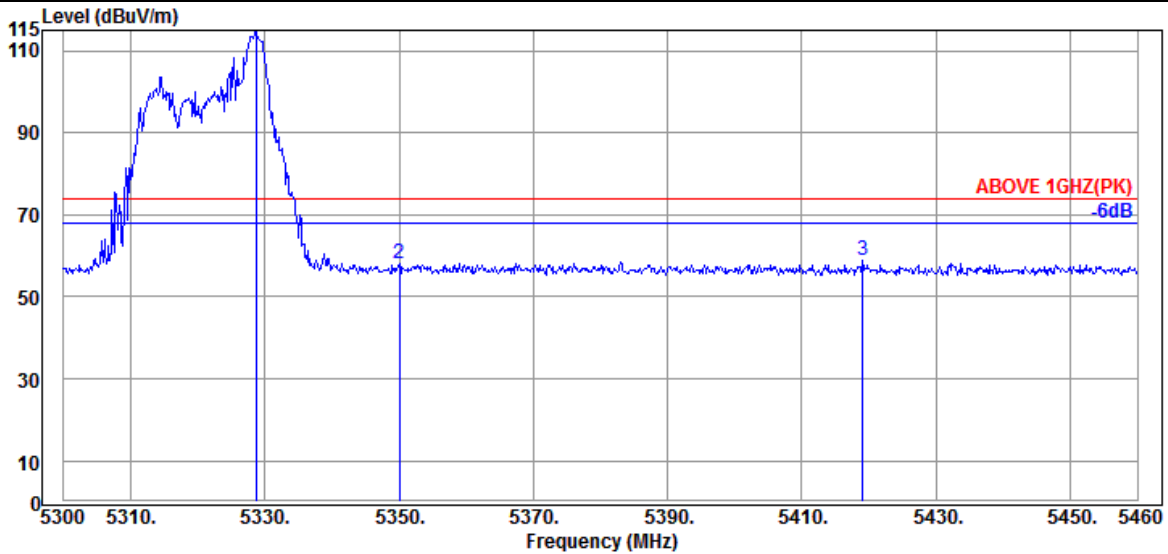

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.57	10.83	34.28	104.34	115.46	---	---	Peak
5350.080	34.60	10.83	34.27	46.77	57.93	74.00	16.07	Peak
5419.040	34.60	10.87	34.26	47.58	58.79	74.00	15.21	Peak

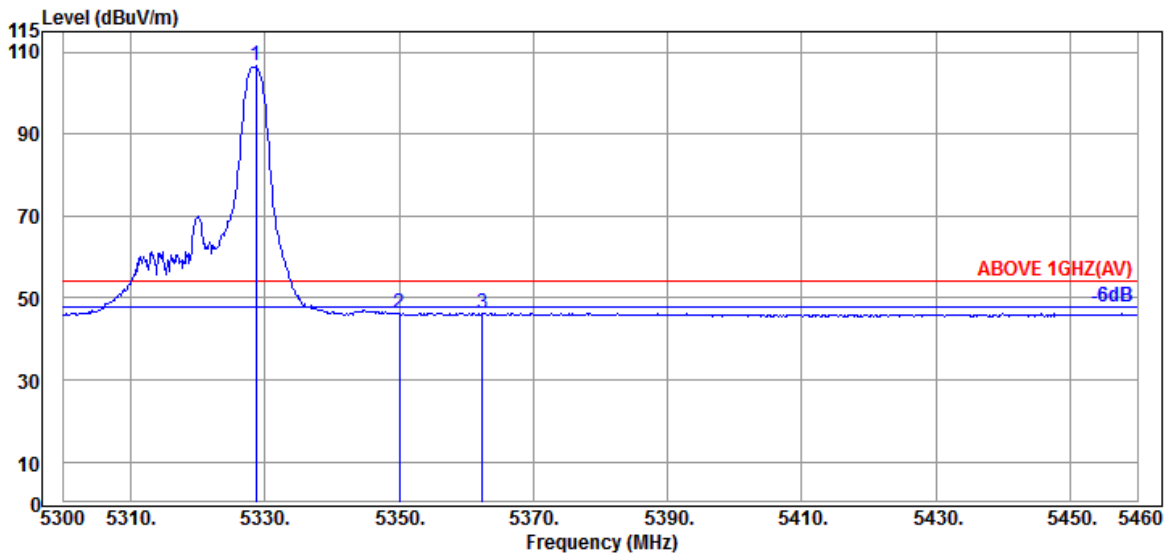


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.57	10.83	34.28	95.51	106.63	---	---	Average
5350.080	34.60	10.83	34.27	34.93	46.09	54.00	7.91	Average
5362.400	34.63	10.85	34.27	35.14	46.35	54.00	7.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

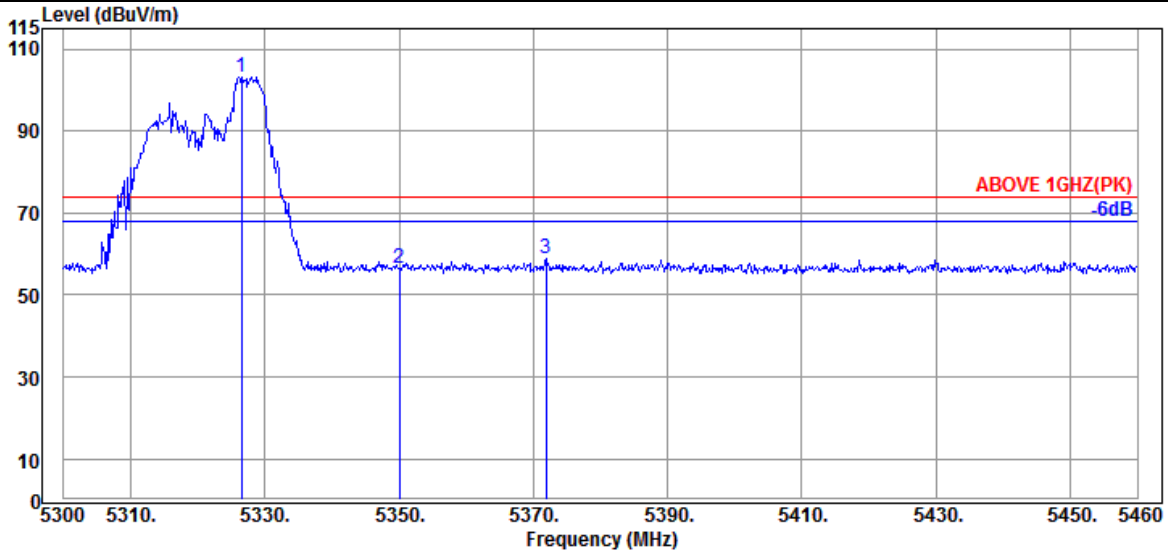

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.560	34.57	10.83	34.28	92.13	103.25	---	---	Peak
5350.080	34.60	10.83	34.27	45.45	56.61	74.00	17.39	Peak
5371.840	34.67	10.85	34.27	47.60	58.85	74.00	15.15	Peak

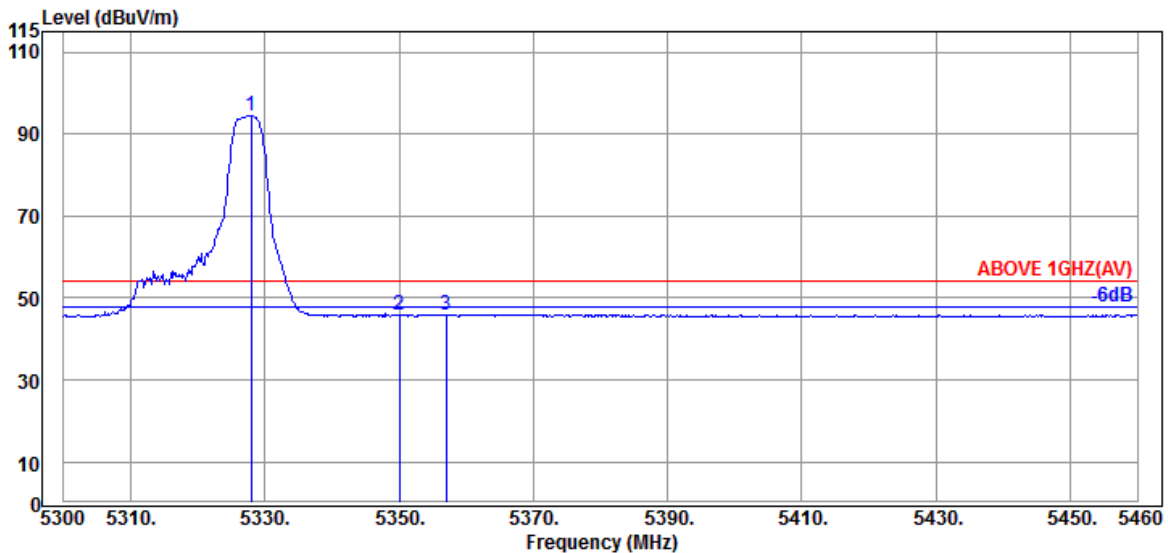


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	34.57	10.83	34.28	83.52	94.64	---	---	Average
5350.080	34.60	10.83	34.27	34.66	45.82	54.00	8.18	Average
5356.960	34.63	10.85	34.27	34.78	45.99	54.00	8.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

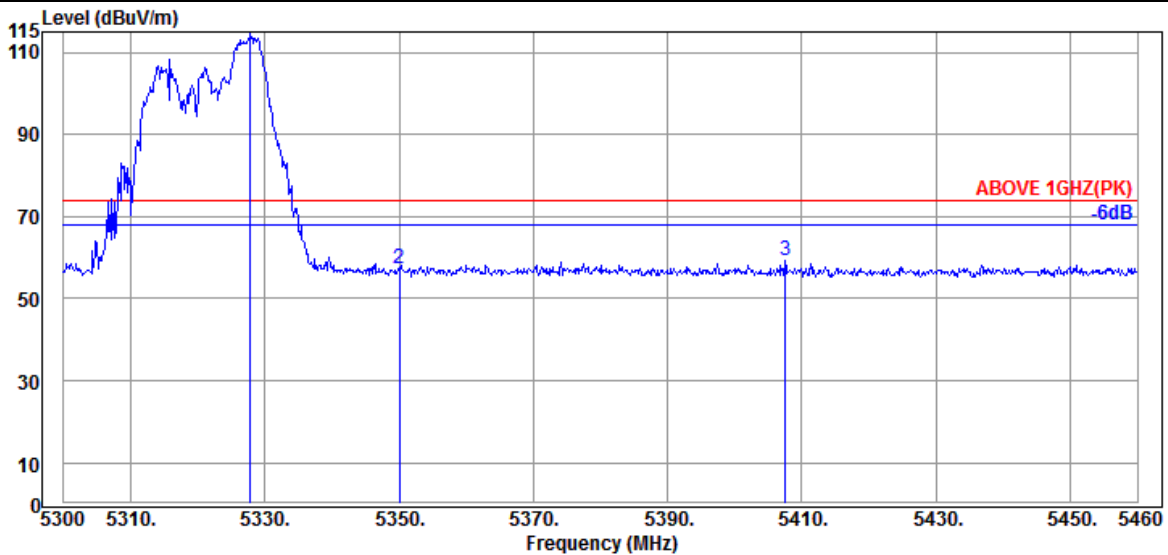

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.57	10.83	34.28	103.38	114.50	---	---	Peak
5350.080	34.60	10.83	34.27	45.96	57.12	74.00	16.88	Peak
5407.520	34.65	10.87	34.26	48.01	59.27	74.00	14.73	Peak

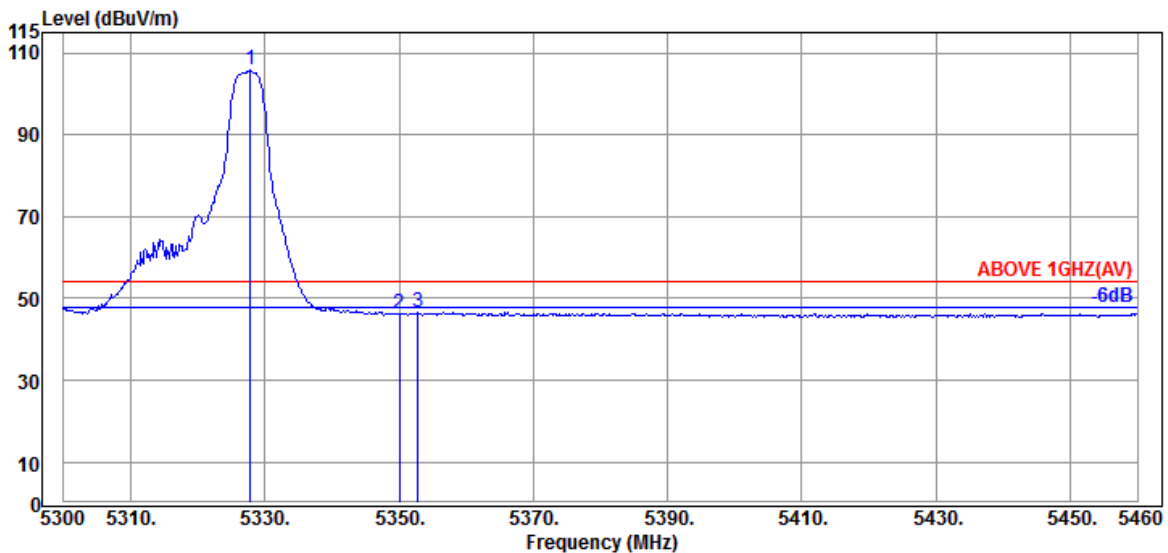


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.57	10.83	34.28	94.61	105.73	---	---	Average
5350.080	34.60	10.83	34.27	35.19	46.35	54.00	7.65	Average
5352.800	34.60	10.83	34.27	35.40	46.56	54.00	7.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

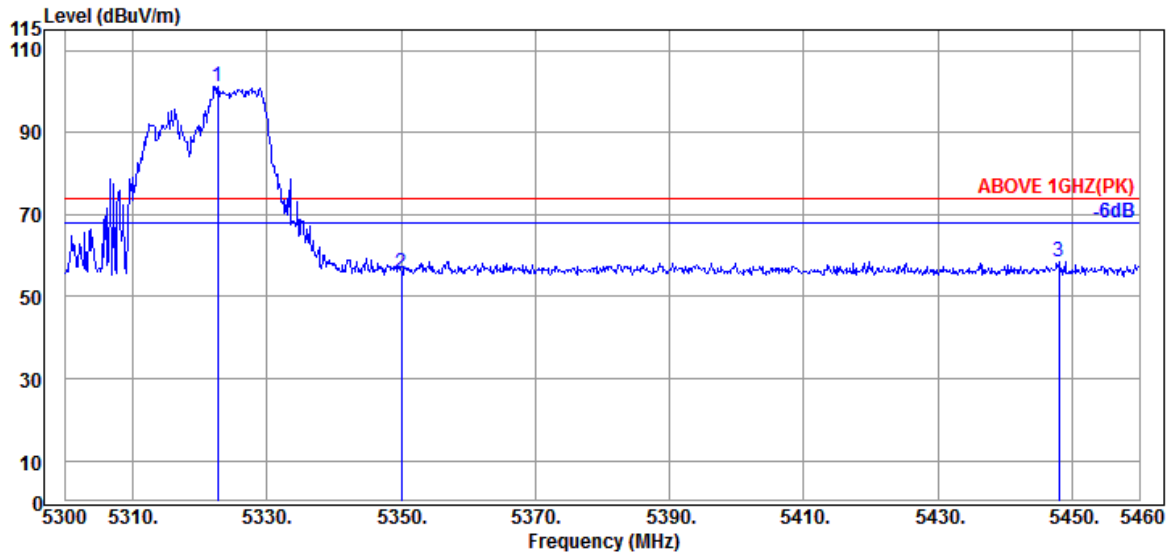

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	34.53	10.83	34.28	90.18	101.26	---	---	Peak
5350.080	34.60	10.83	34.27	44.75	55.91	74.00	18.09	Peak
5448.000	34.50	10.89	34.25	47.46	58.60	74.00	15.40	Peak

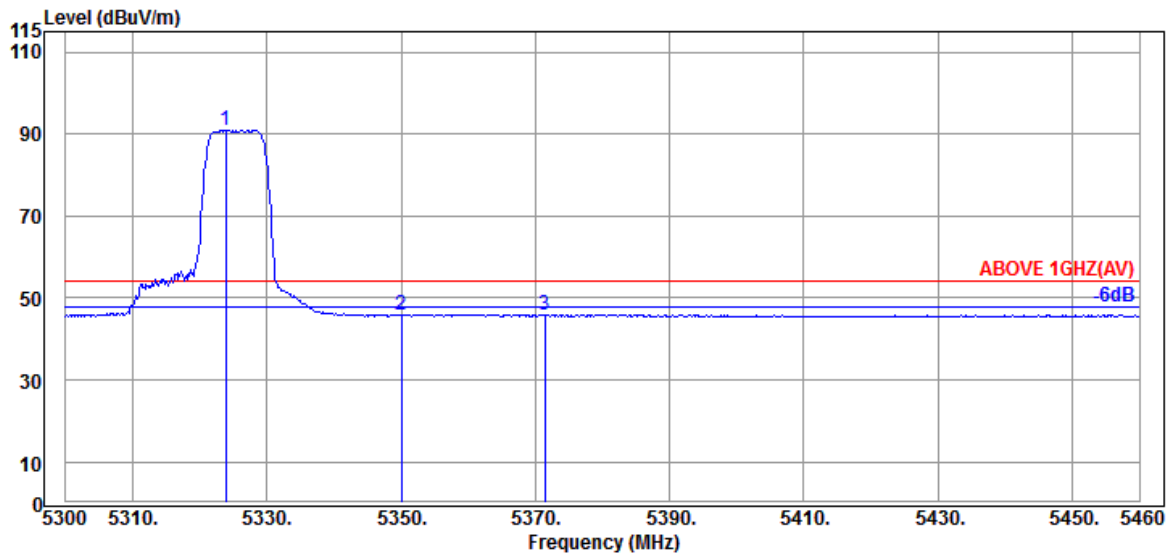


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	34.57	10.83	34.28	79.95	91.07	---	---	Average
5350.080	34.60	10.83	34.27	34.55	45.71	54.00	8.29	Average
5371.360	34.67	10.85	34.27	34.75	46.00	54.00	8.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

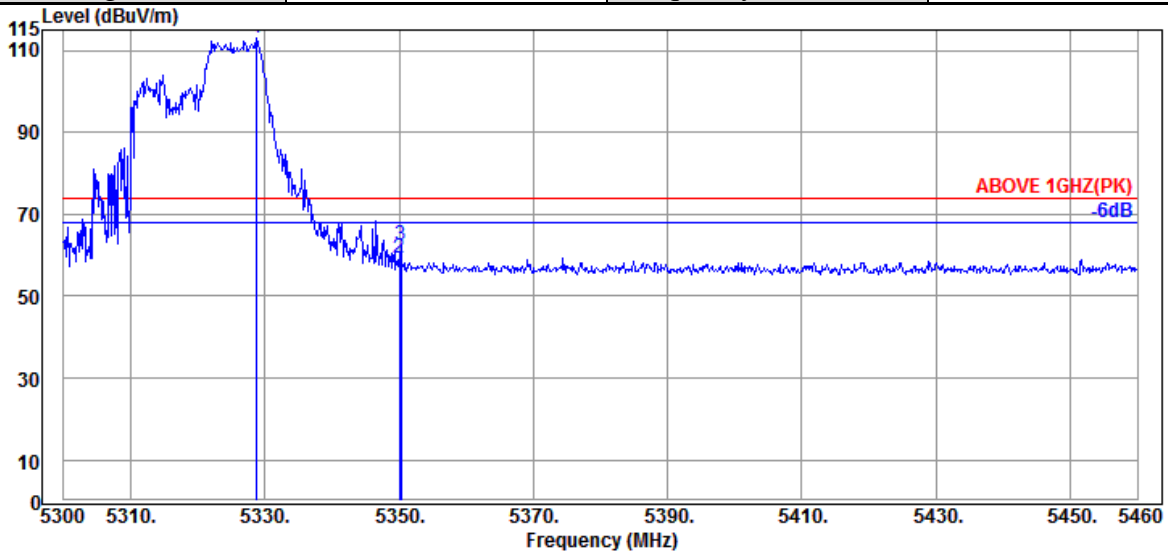

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	34.57	10.83	34.28	101.74	112.86	---	---	Peak
5350.080	34.60	10.83	34.27	48.03	59.19	74.00	14.81	Peak
5350.240	34.60	10.83	34.27	51.14	62.30	74.00	11.70	Peak

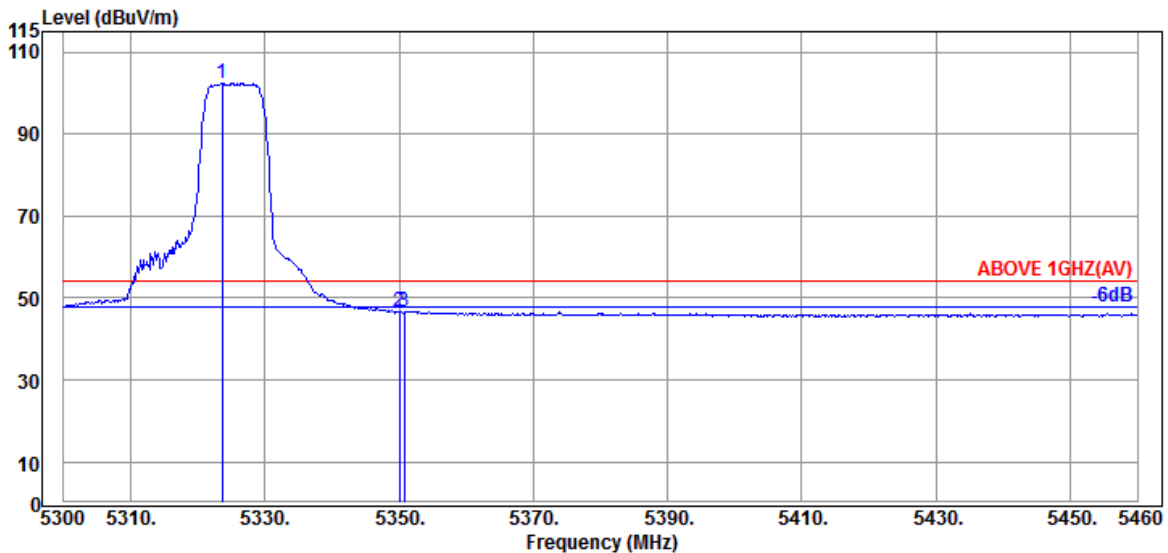


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	34.57	10.83	34.28	91.16	102.28	---	---	Average
5350.080	34.60	10.83	34.27	35.33	46.49	54.00	7.51	Average
5350.720	34.60	10.83	34.27	35.54	46.70	54.00	7.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

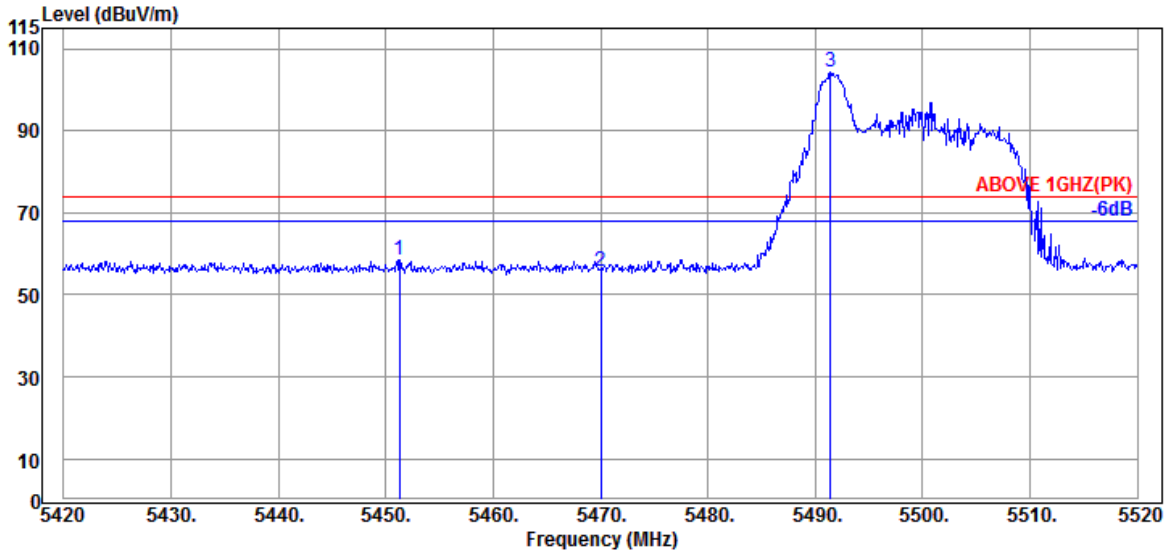

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.300	34.50	10.89	34.24	47.47	58.62	74.00	15.38	Peak
5470.000	34.47	10.91	34.24	44.75	55.89	74.00	18.11	Peak
@ 5491.400	34.43	10.91	34.23	93.05	104.16	---	---	Peak

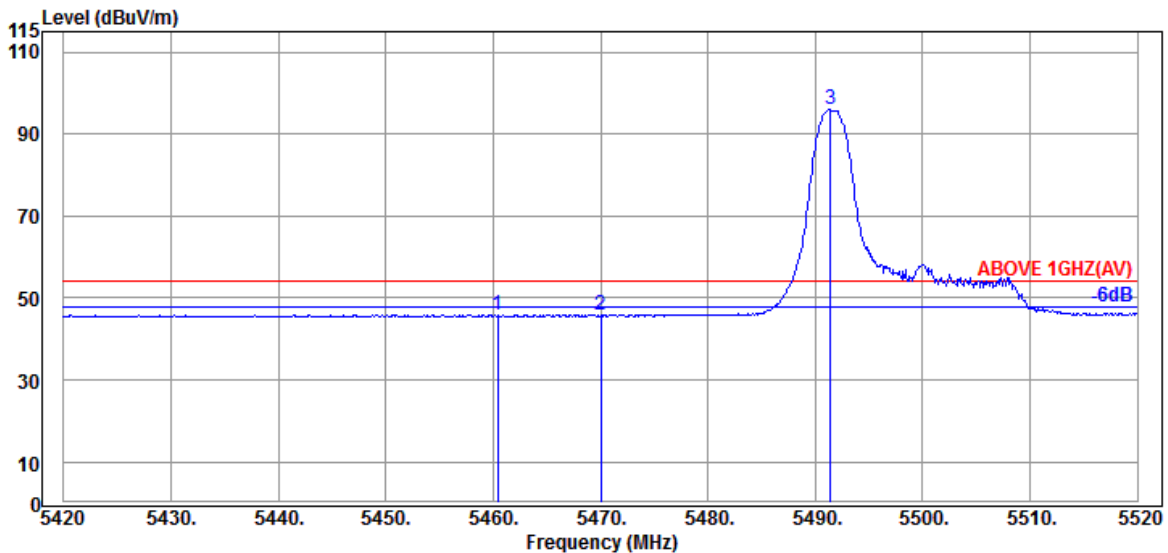


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.400	34.50	10.91	34.24	34.86	46.03	54.00	7.97	Average
5470.000	34.47	10.91	34.24	34.60	45.74	54.00	8.26	Average
@ 5491.400	34.43	10.91	34.23	84.89	96.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

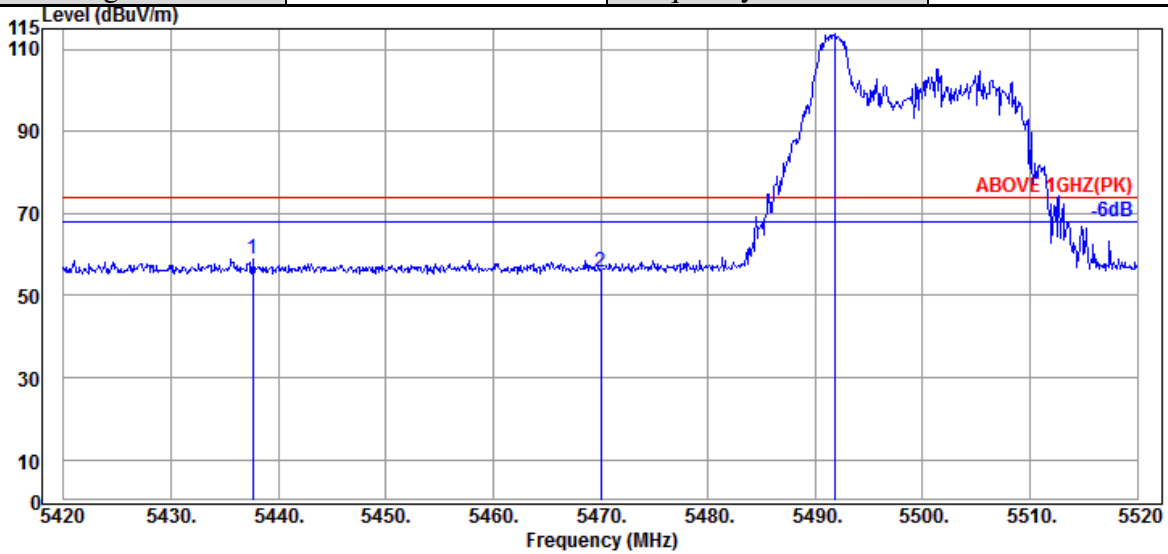

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.600	34.55	10.89	34.25	47.84	59.03	74.00	14.97	Peak
5470.000	34.47	10.91	34.24	44.64	55.78	74.00	18.22	Peak
@ 5491.900	34.43	10.91	34.23	102.65	113.76	---	---	Peak

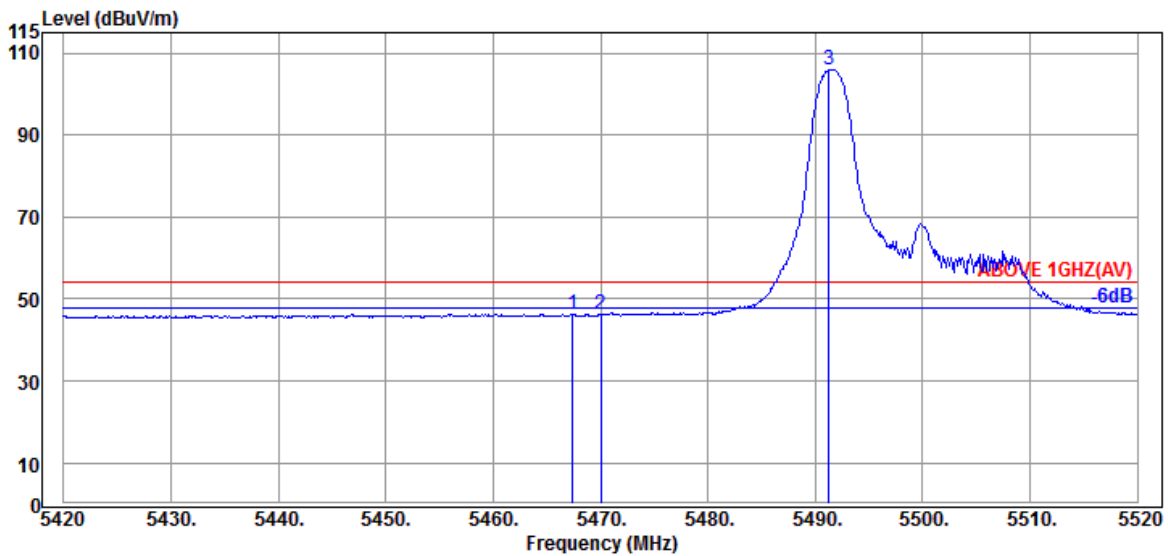


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.47	10.91	34.24	35.22	46.36	54.00	7.64	Average
5470.000	34.47	10.91	34.24	35.13	46.27	54.00	7.73	Average
@ 5491.300	34.43	10.91	34.23	94.94	106.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

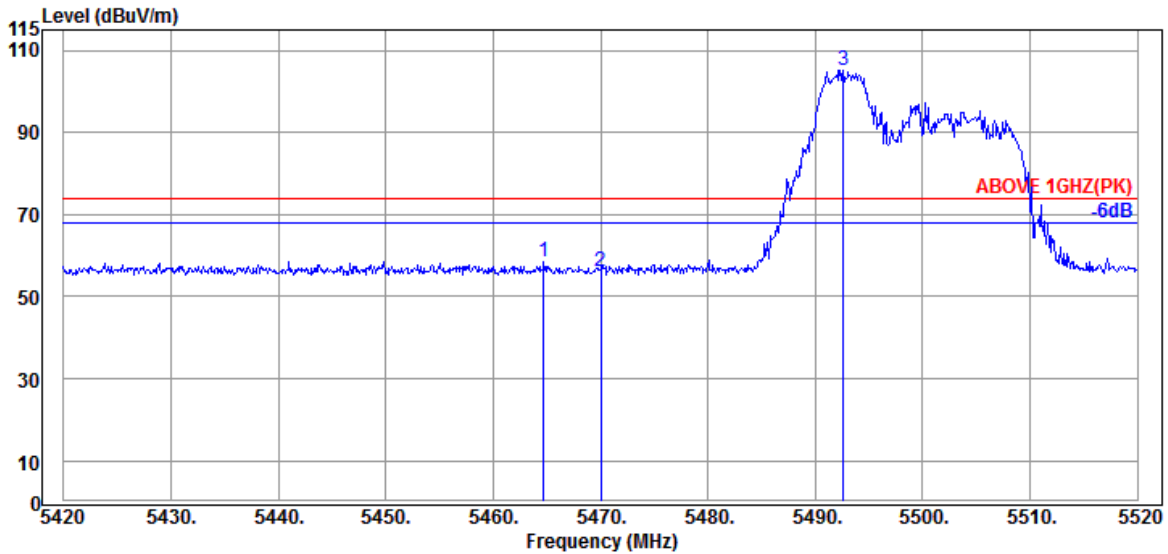

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.47	10.91	34.24	47.51	58.65	74.00	15.35	Peak
5470.000	34.47	10.91	34.24	45.13	56.27	74.00	17.73	Peak
@ 5492.600	34.43	10.91	34.23	94.00	105.11	---	---	Peak

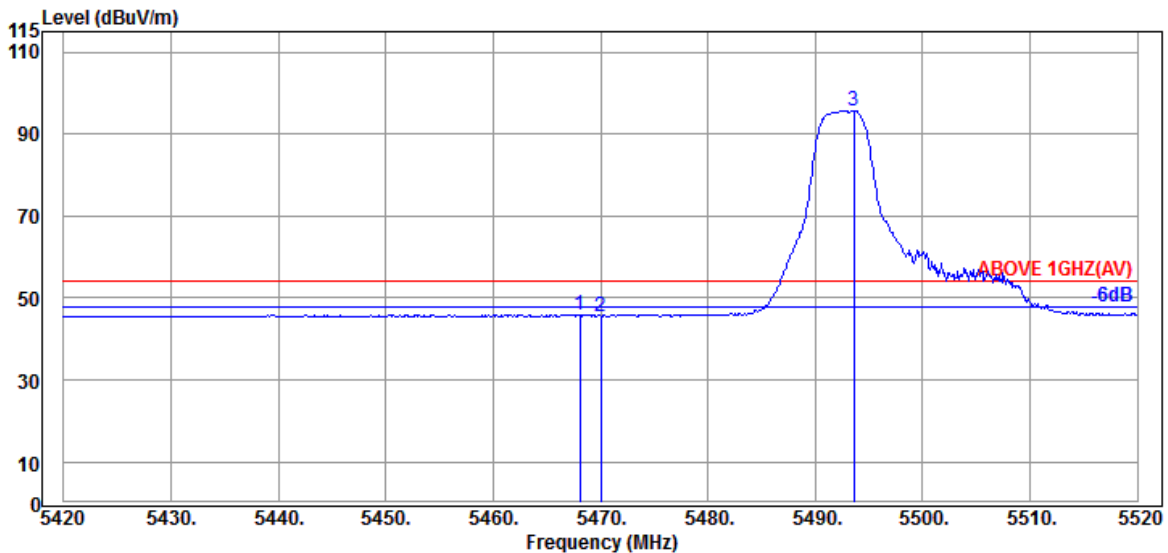


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.47	10.91	34.24	34.80	45.94	54.00	8.06	Average
5470.000	34.47	10.91	34.24	34.47	45.61	54.00	8.39	Average
@ 5493.600	34.43	10.91	34.23	84.63	95.74	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

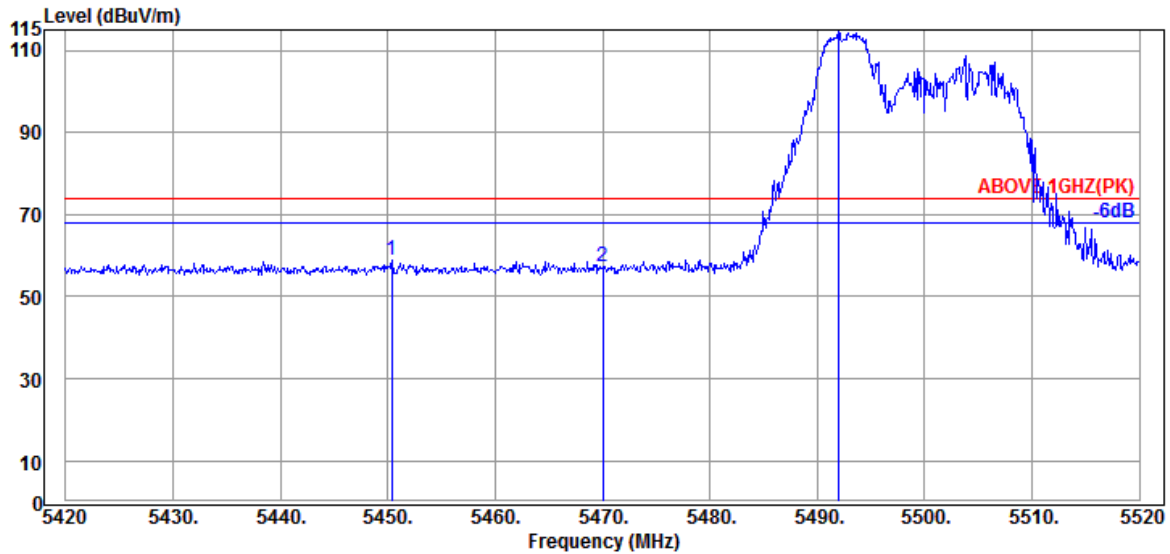

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.400	34.50	10.89	34.24	47.57	58.72	74.00	15.28	Peak
5470.000	34.47	10.91	34.24	46.19	57.33	74.00	16.67	Peak
@ 5492.000	34.43	10.91	34.23	103.33	114.44	---	---	Peak

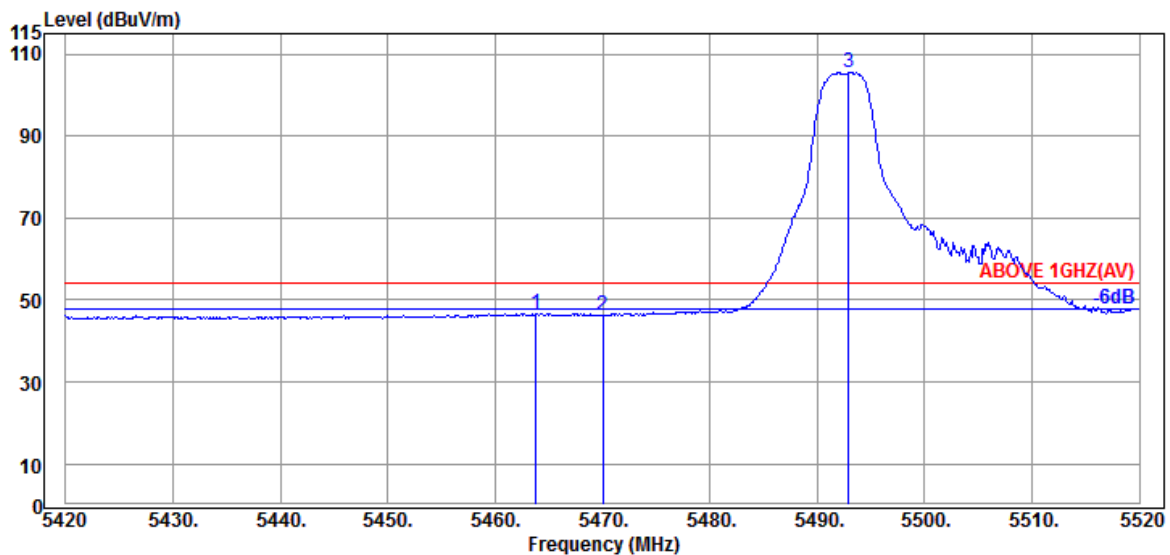


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.47	10.91	34.24	35.64	46.78	54.00	7.22	Average
5470.000	34.47	10.91	34.24	35.13	46.27	54.00	7.73	Average
@ 5492.900	34.43	10.91	34.23	94.38	105.49	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

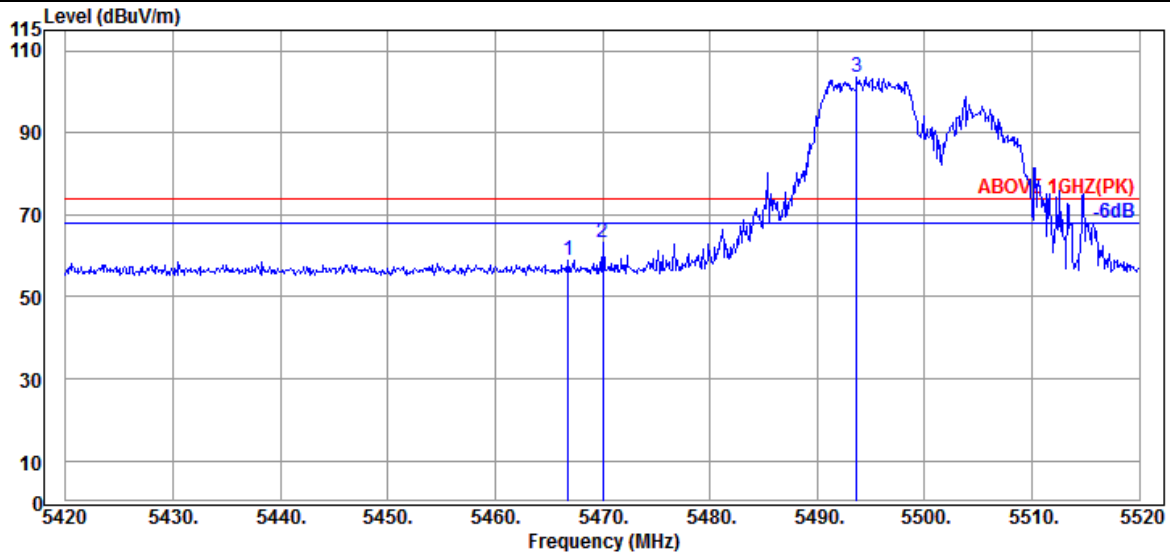

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.47	10.91	34.24	47.71	58.85	74.00	15.15	Peak
5470.000	34.47	10.91	34.24	51.93	63.07	74.00	10.93	Peak
@ 5493.700	34.43	10.91	34.23	92.54	103.65	---	---	Peak

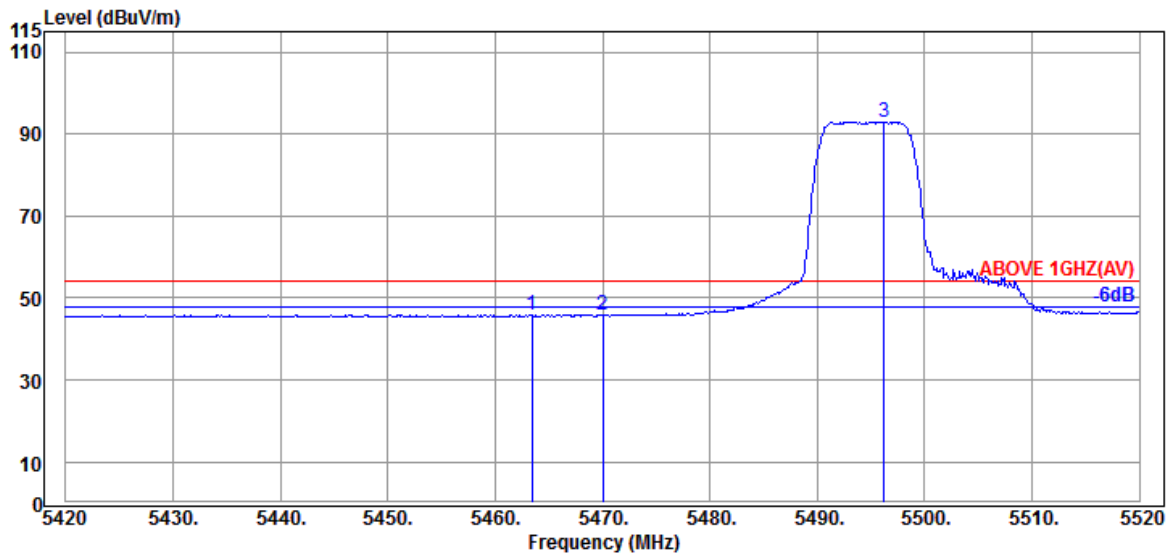


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.50	10.91	34.24	34.79	45.96	54.00	8.04	Average
5470.000	34.47	10.91	34.24	34.57	45.71	54.00	8.29	Average
@ 5496.200	34.40	10.93	34.23	81.90	93.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

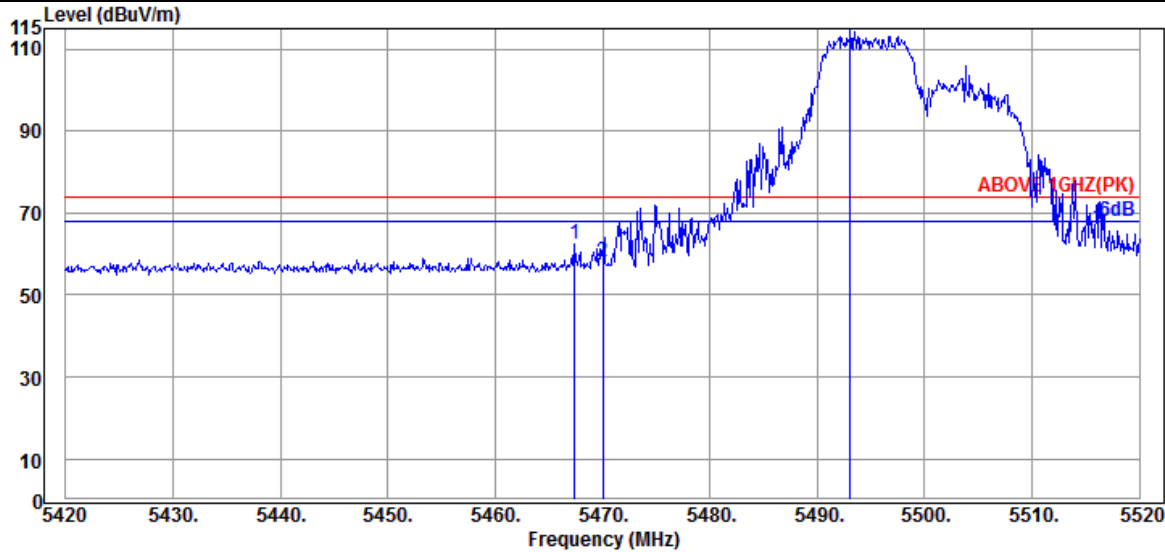

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.47	10.91	34.24	51.48	62.62	74.00	11.38	Peak
5470.000	34.47	10.91	34.24	46.91	58.05	74.00	15.95	Peak
@ 5493.100	34.43	10.91	34.23	103.88	114.99	---	---	Peak

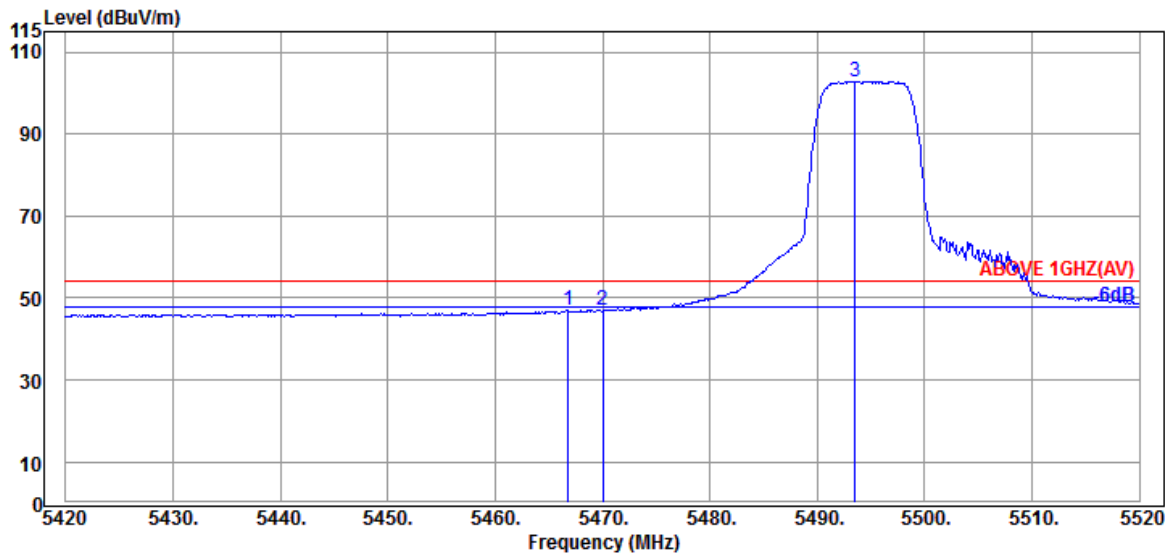


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.47	10.91	34.24	35.87	47.01	54.00	6.99	Average
5470.000	34.47	10.91	34.24	35.69	46.83	54.00	7.17	Average
@ 5493.500	34.43	10.91	34.23	91.75	102.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

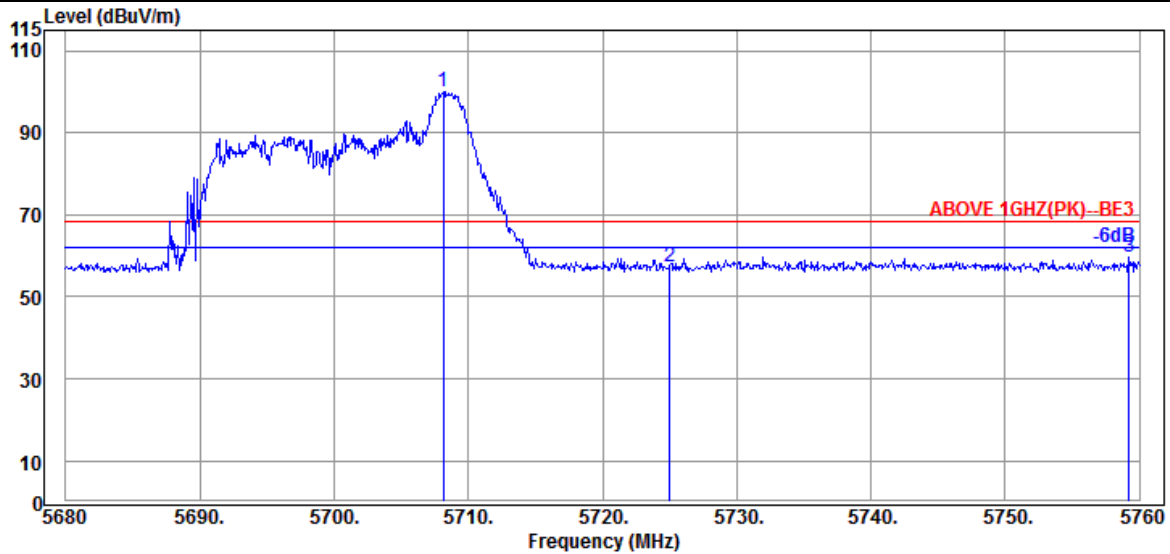

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.160	34.53	11.03	34.32	88.62	99.86	---	---	Peak
5725.040	34.67	11.05	34.32	45.77	57.17	68.20	11.03	Peak
5759.200	34.87	11.06	34.35	48.04	59.62	68.20	8.58	Peak

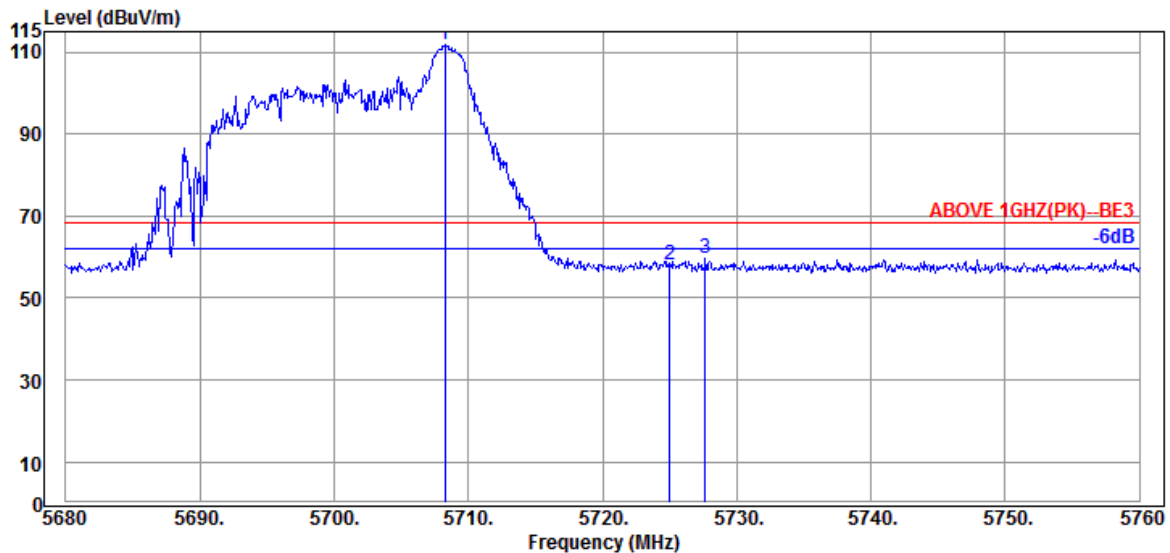


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.240	34.53	11.03	34.32	100.52	111.76	---	---	Peak
5725.040	34.67	11.05	34.32	46.78	58.18	68.20	10.02	Peak
5727.680	34.67	11.05	34.32	48.31	59.71	68.20	8.49	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

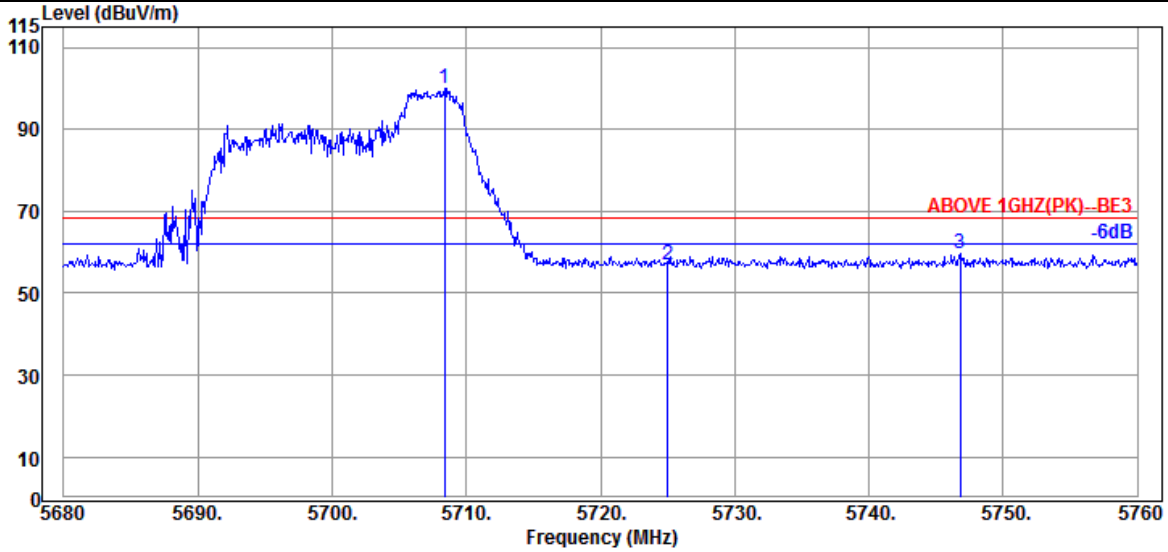

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.400	34.53	11.03	34.32	88.79	100.03	---	---	Peak
5725.040	34.67	11.05	34.32	45.44	56.84	68.20	11.36	Peak
5746.800	34.80	11.06	34.33	48.25	59.78	68.20	8.42	Peak

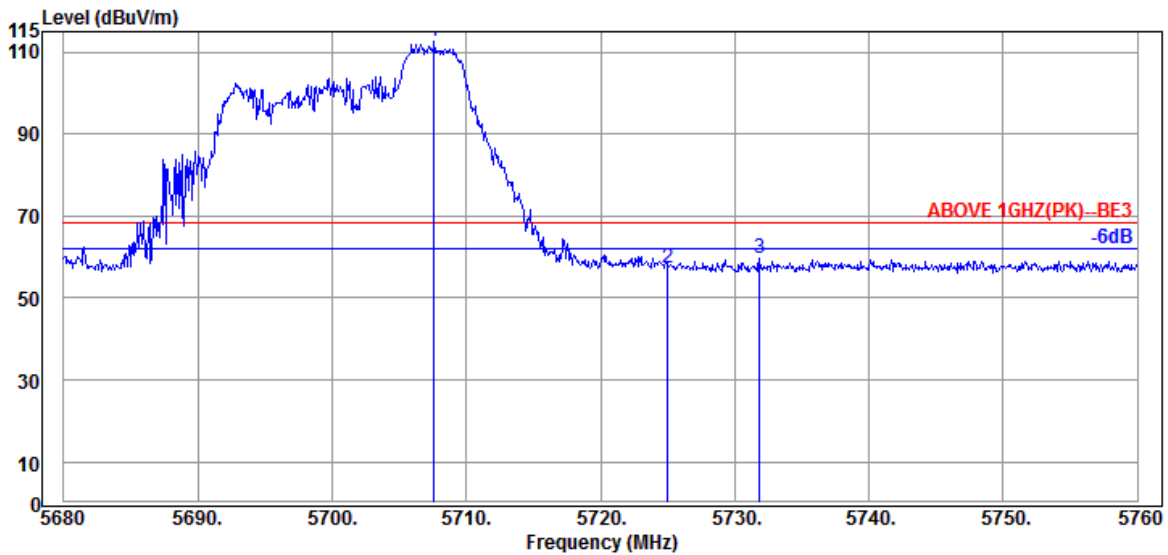


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.600	34.53	11.03	34.32	101.24	112.48	---	---	Peak
5725.040	34.67	11.05	34.32	45.93	57.33	68.20	10.87	Peak
5731.840	34.67	11.05	34.33	48.10	59.49	68.20	8.71	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

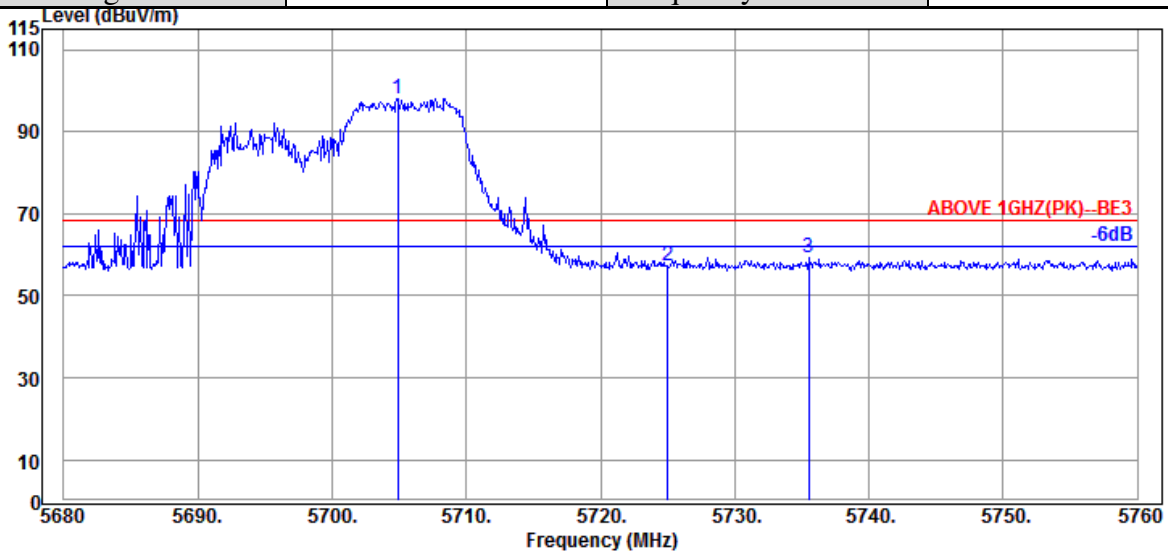

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.880	34.40	11.03	34.32	87.06	98.17	---	---	Peak
5725.040	34.67	11.05	34.32	45.74	57.14	68.20	11.06	Peak
5735.520	34.67	11.05	34.33	48.00	59.39	68.20	8.81	Peak

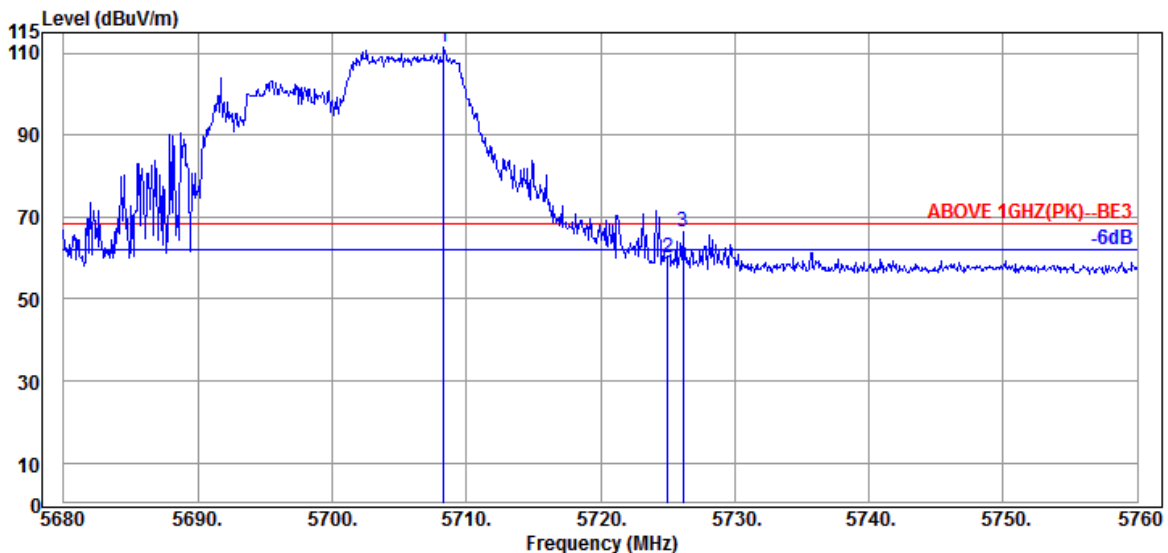


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.320	34.53	11.03	34.32	100.04	111.28	---	---	Peak
5725.040	34.67	11.05	34.32	48.77	60.17	68.20	8.03	Peak
5726.160	34.67	11.05	34.32	54.95	66.35	68.20	1.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

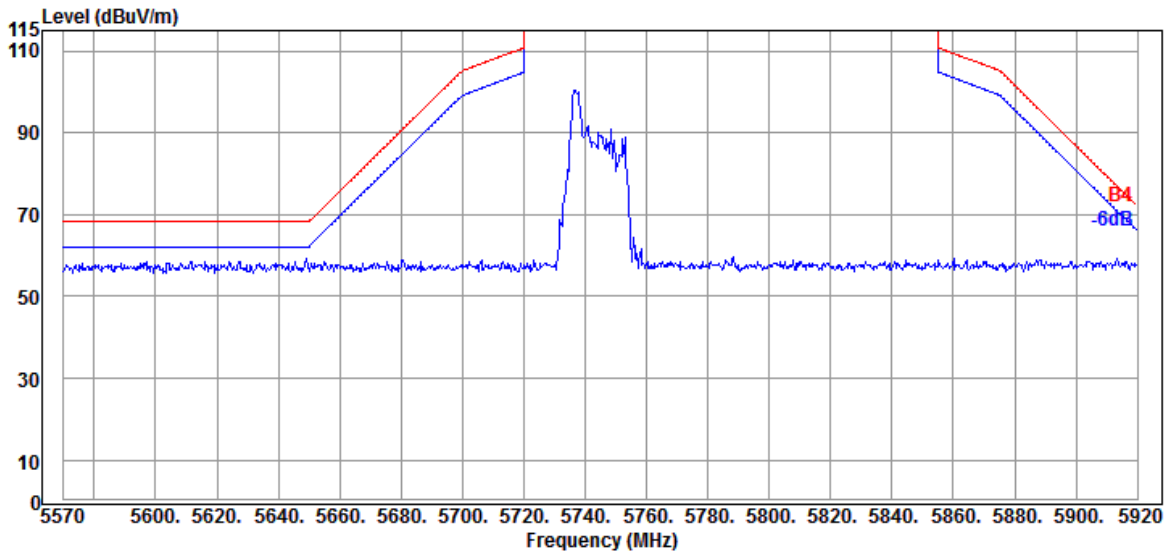


Antenna at Vertical Polarization

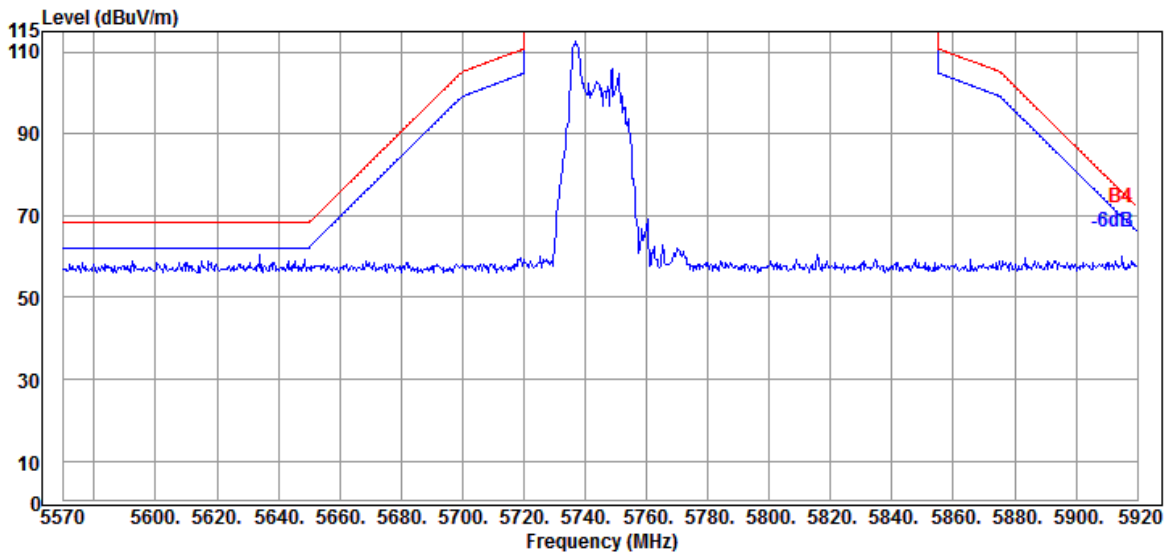


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

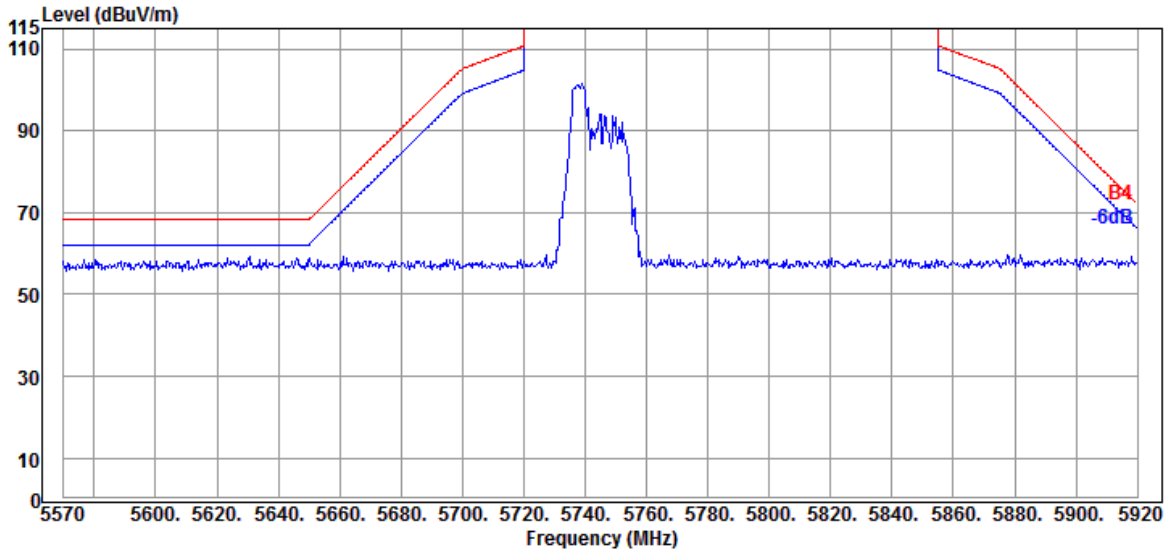


Antenna at Vertical Polarization

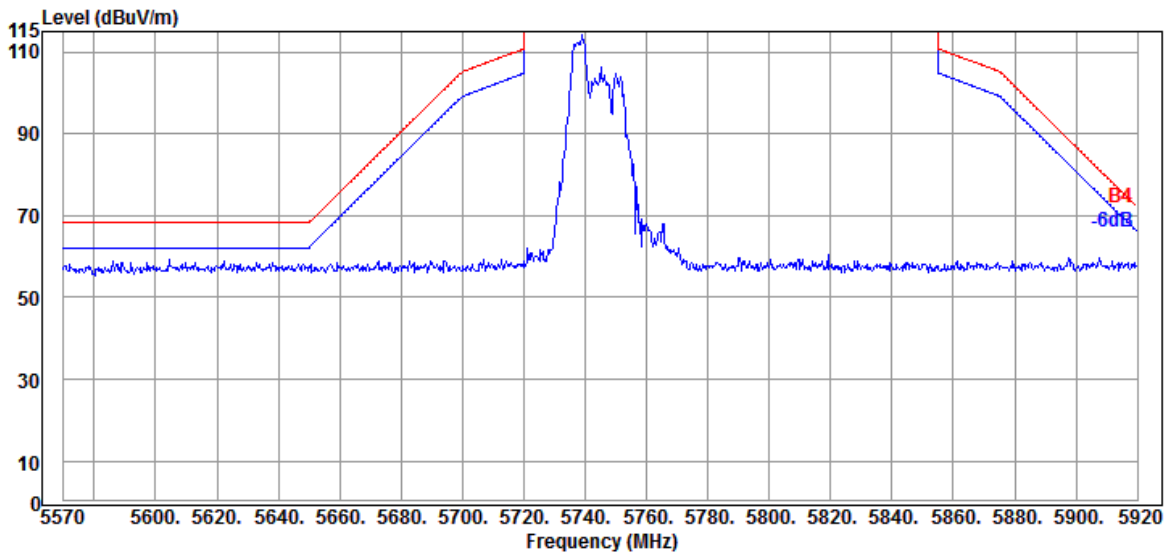


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

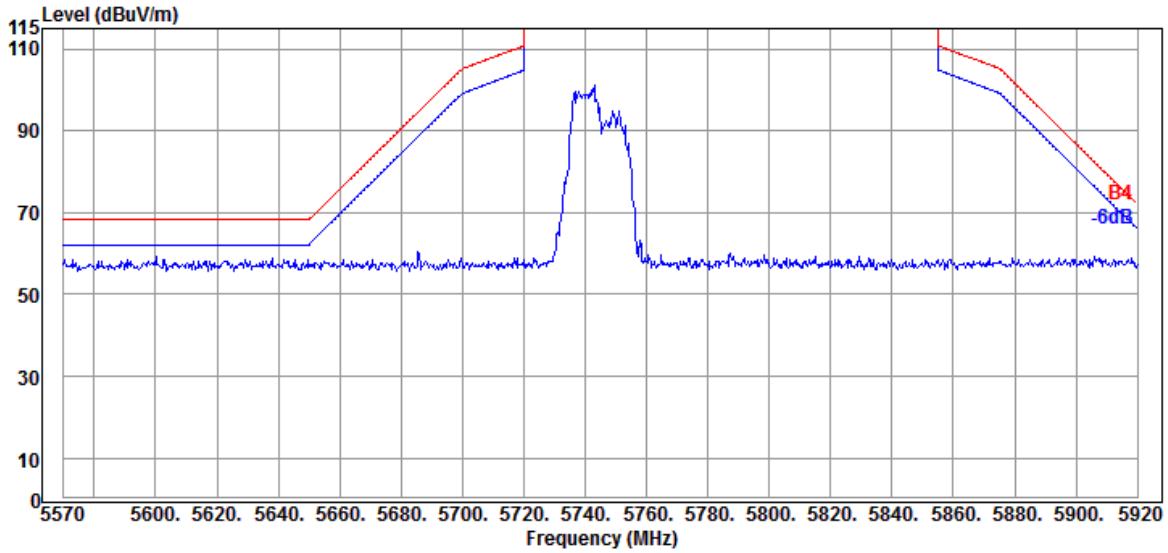


Antenna at Vertical Polarization

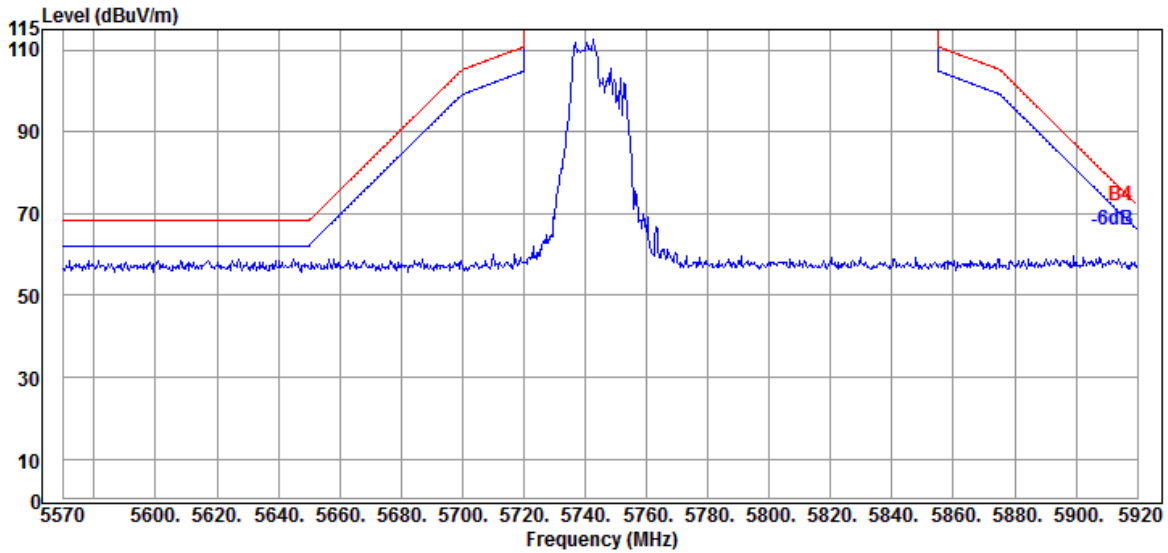


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

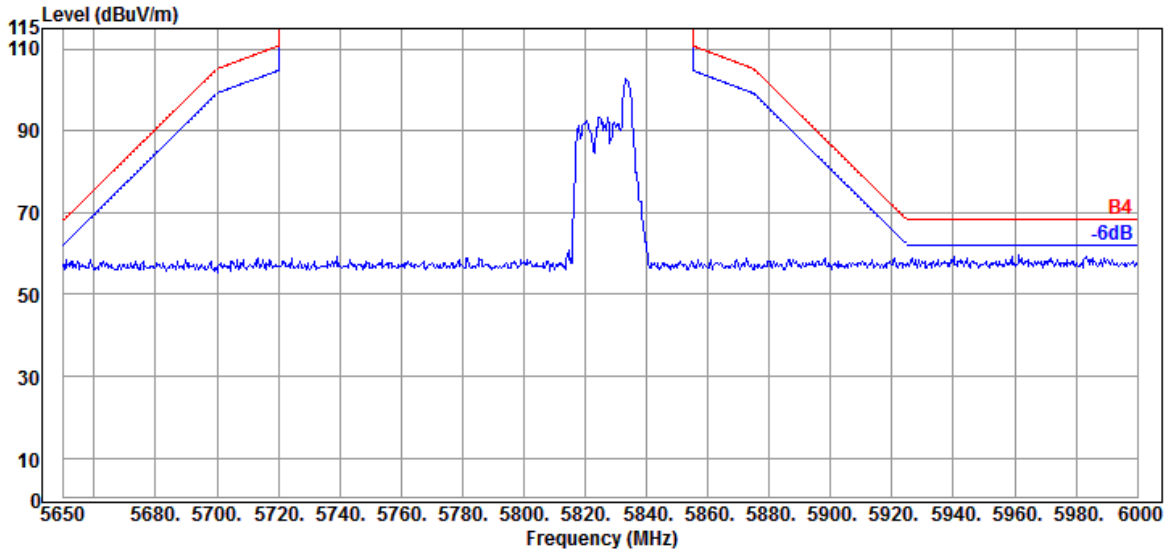


Antenna at Vertical Polarization

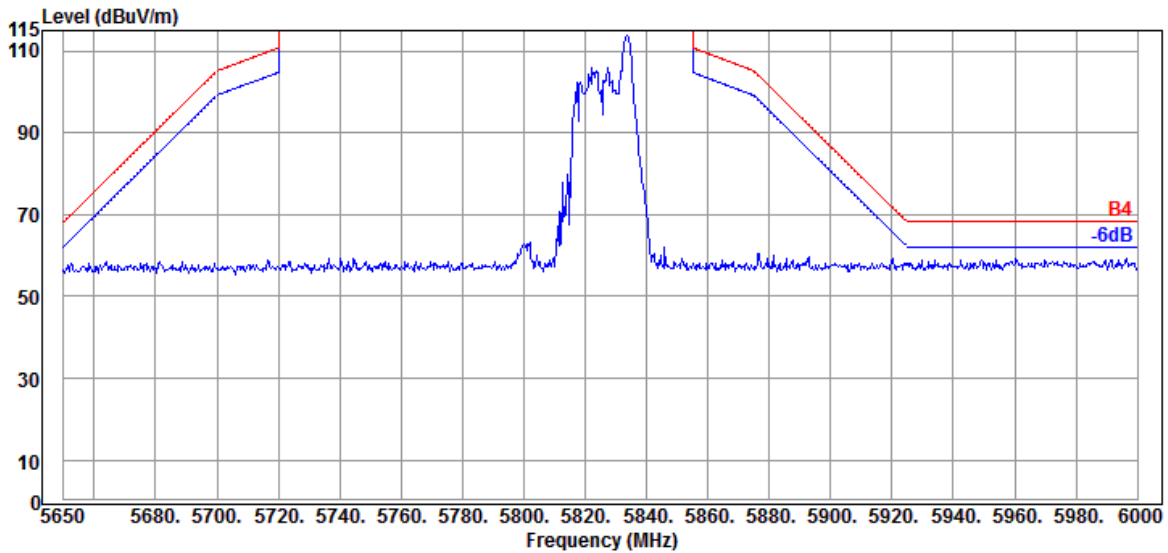


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

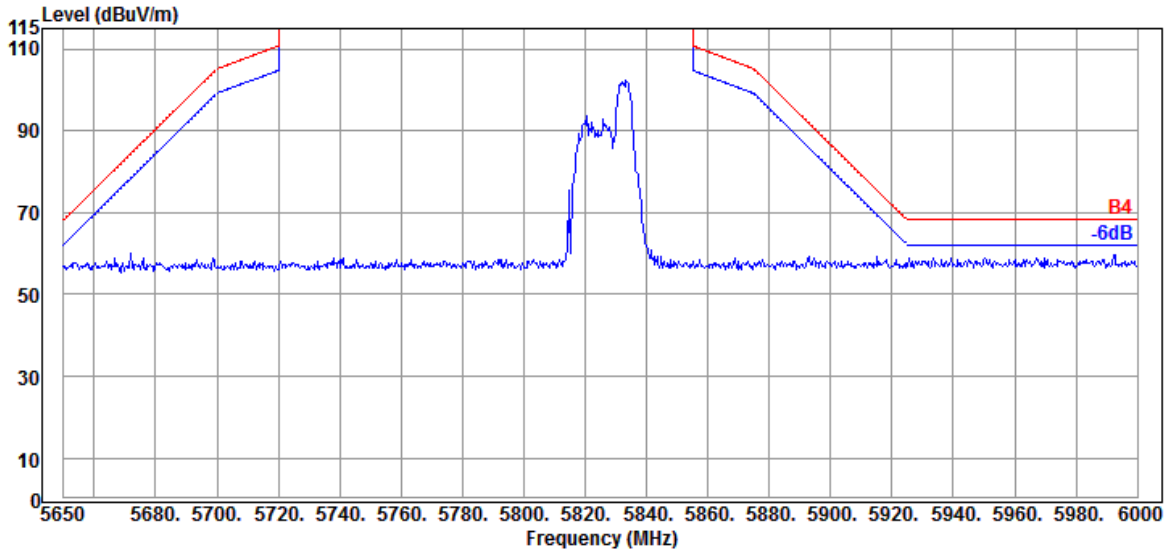


Antenna at Vertical Polarization

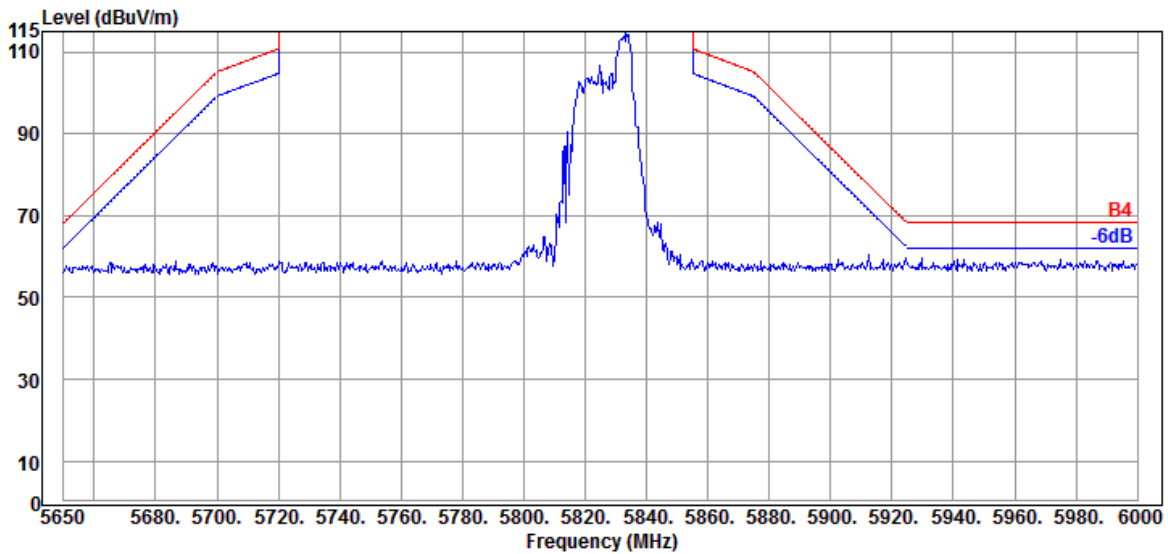


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

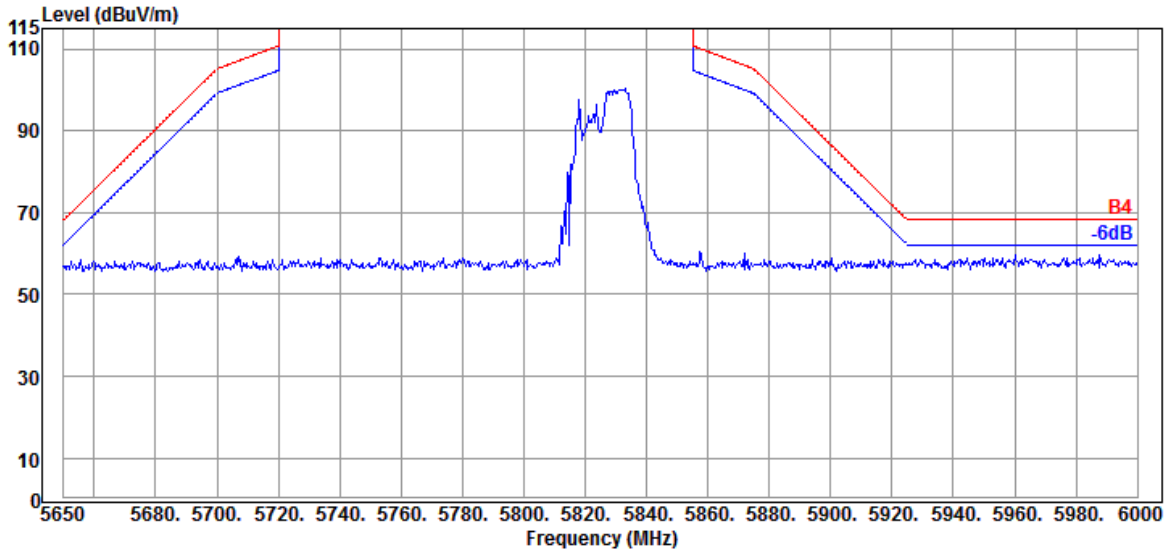

Antenna at Vertical Polarization

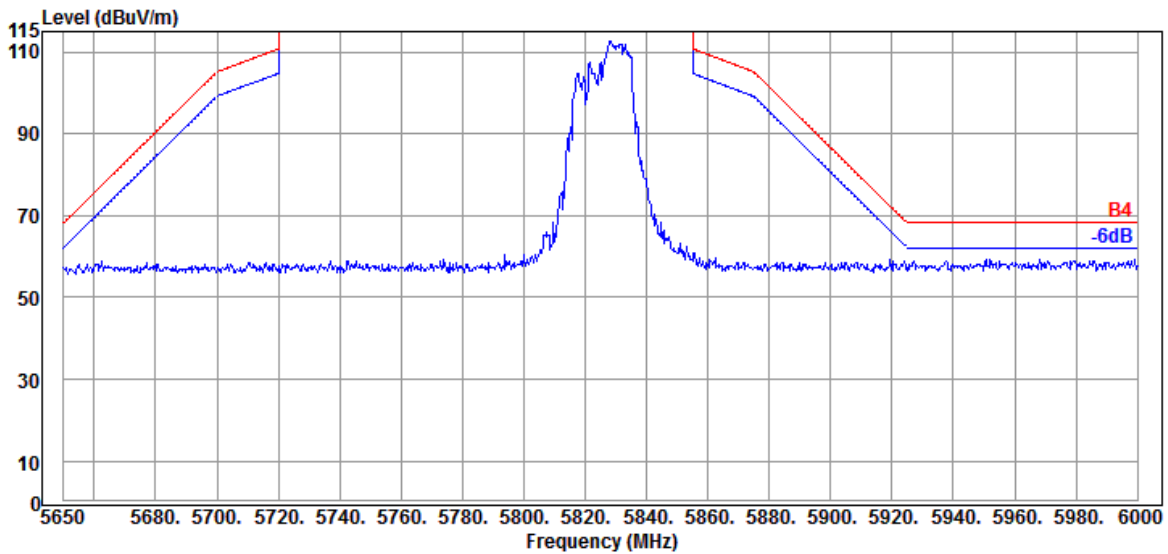


Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

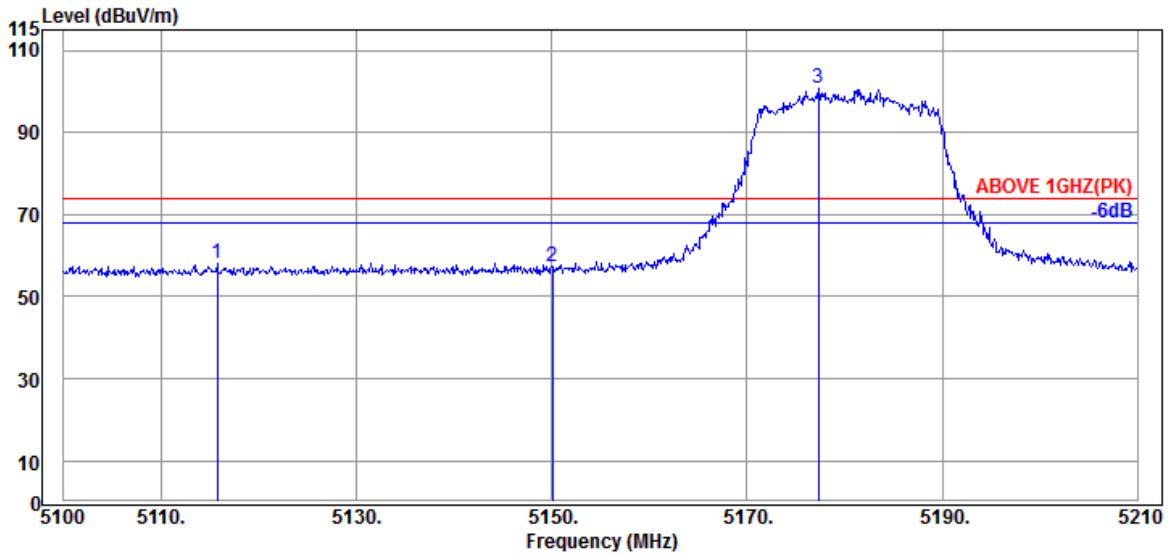

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.730	34.13	10.68	34.36	47.65	58.10	74.00	15.90	Peak
5150.050	34.20	10.70	34.35	46.69	57.24	74.00	16.76	Peak
@ 5177.330	34.20	10.72	34.34	90.07	100.65	---	---	Peak

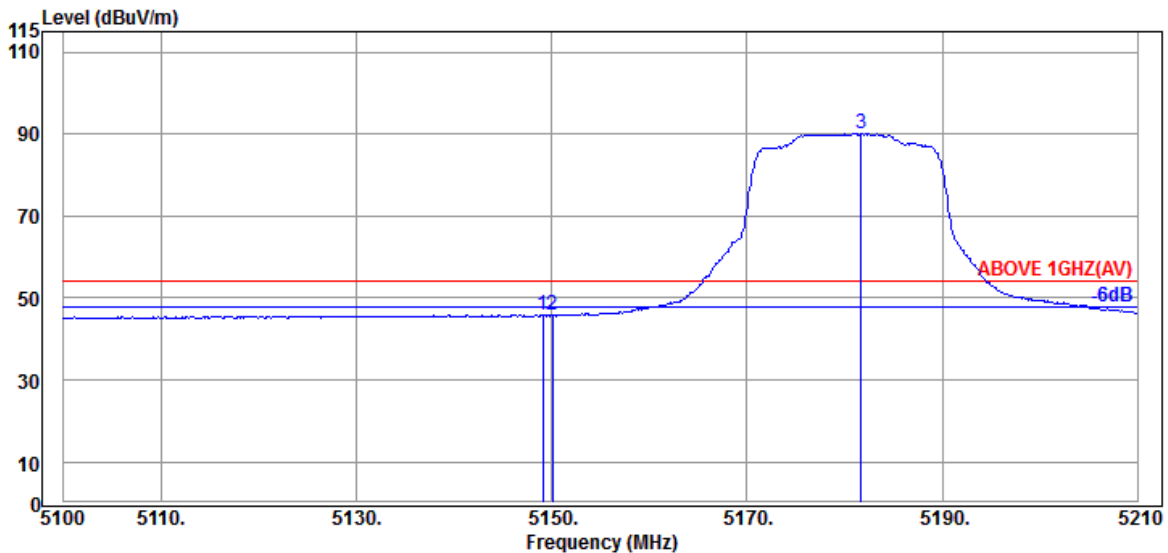


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	10.70	34.35	35.37	45.92	54.00	8.08	Average
5150.050	34.20	10.70	34.35	35.29	45.84	54.00	8.16	Average
@ 5181.730	34.20	10.72	34.34	79.59	90.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

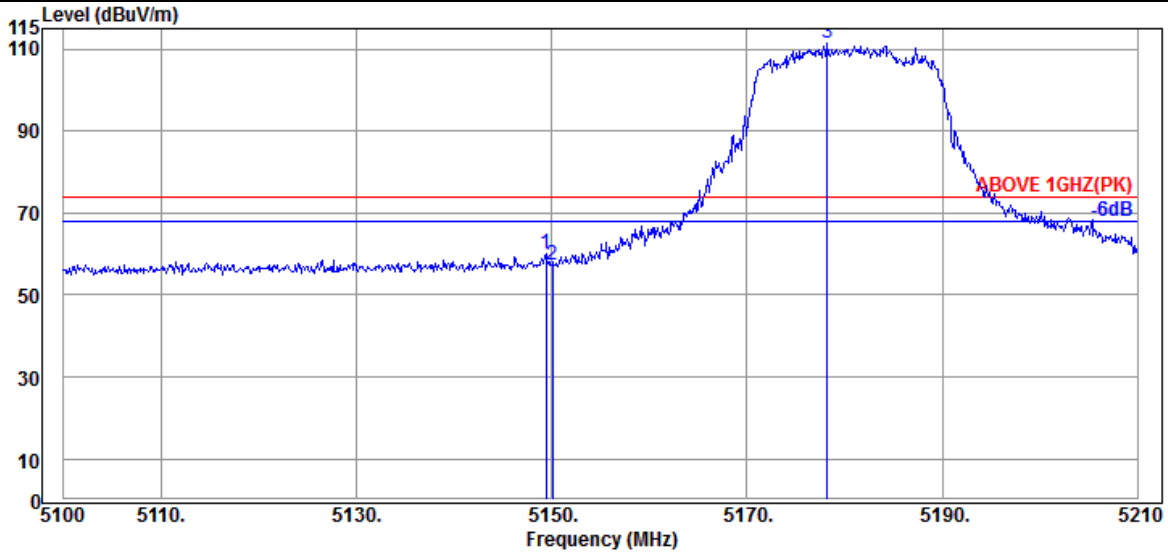

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.20	10.70	34.35	49.64	60.19	74.00	13.81	Peak
5150.050	34.20	10.70	34.35	46.69	57.24	74.00	16.76	Peak
@ 5178.210	34.20	10.72	34.34	101.00	111.58	---	---	Peak

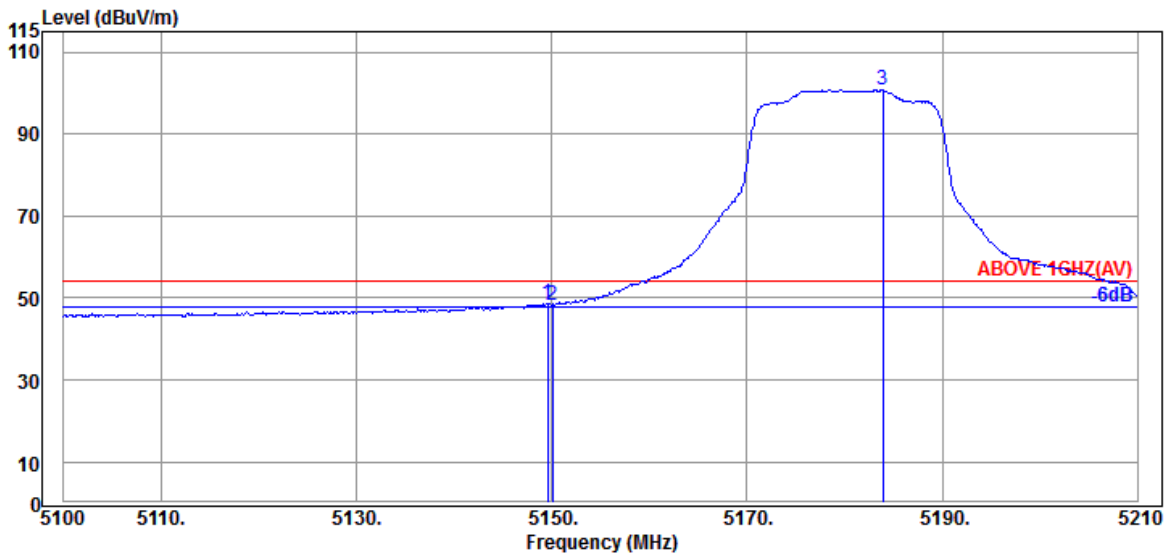


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.20	10.70	34.35	38.05	48.60	54.00	5.40	Average
5150.050	34.20	10.70	34.35	37.63	48.18	54.00	5.82	Average
@ 5183.930	34.20	10.72	34.34	90.26	100.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

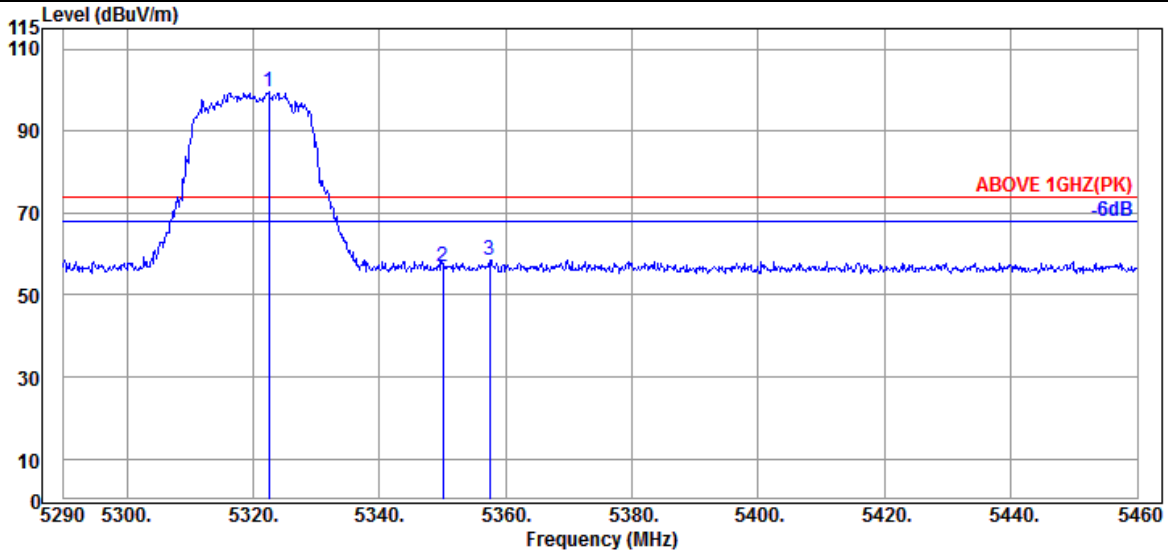

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.470	34.53	10.83	34.28	88.66	99.74	---	---	Peak
5350.010	34.60	10.83	34.27	45.71	56.87	74.00	17.13	Peak
5357.490	34.63	10.85	34.27	47.39	58.60	74.00	15.40	Peak

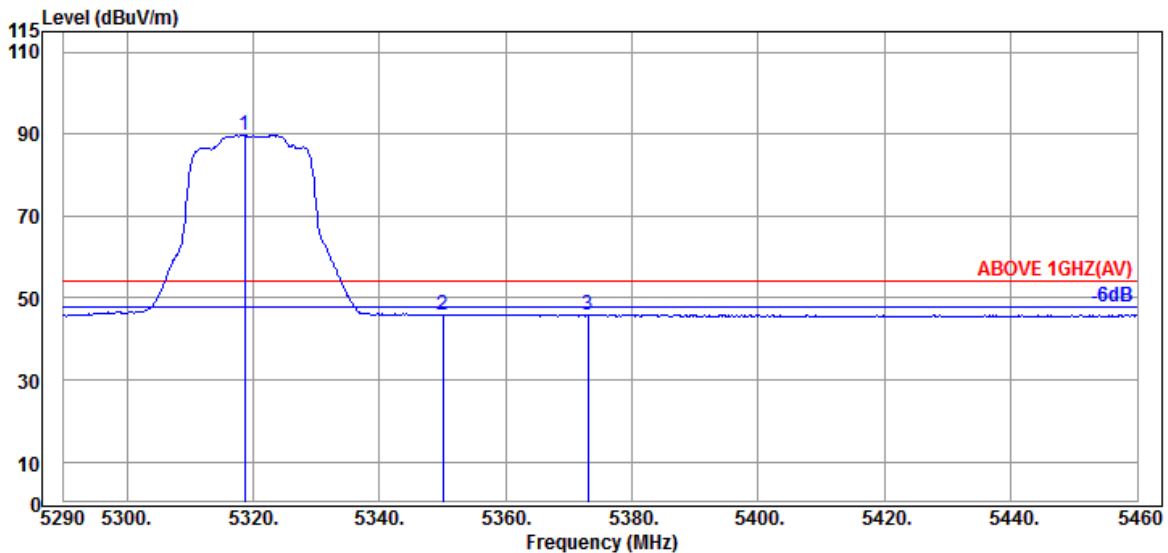


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.730	34.53	10.81	34.29	78.73	89.78	---	---	Average
5350.010	34.60	10.83	34.27	34.58	45.74	54.00	8.26	Average
5372.960	34.67	10.85	34.27	34.77	46.02	54.00	7.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

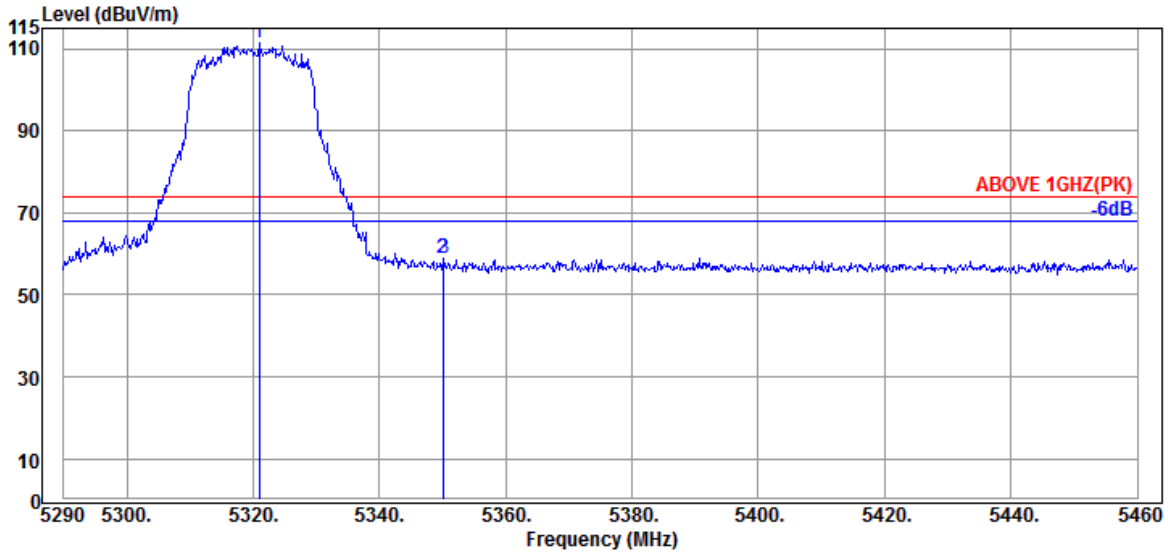

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.940	34.53	10.81	34.29	100.49	111.54	---	---	Peak
5350.010	34.60	10.83	34.27	47.82	58.98	74.00	15.02	Peak
5350.180	34.60	10.83	34.27	47.85	59.01	74.00	14.99	Peak

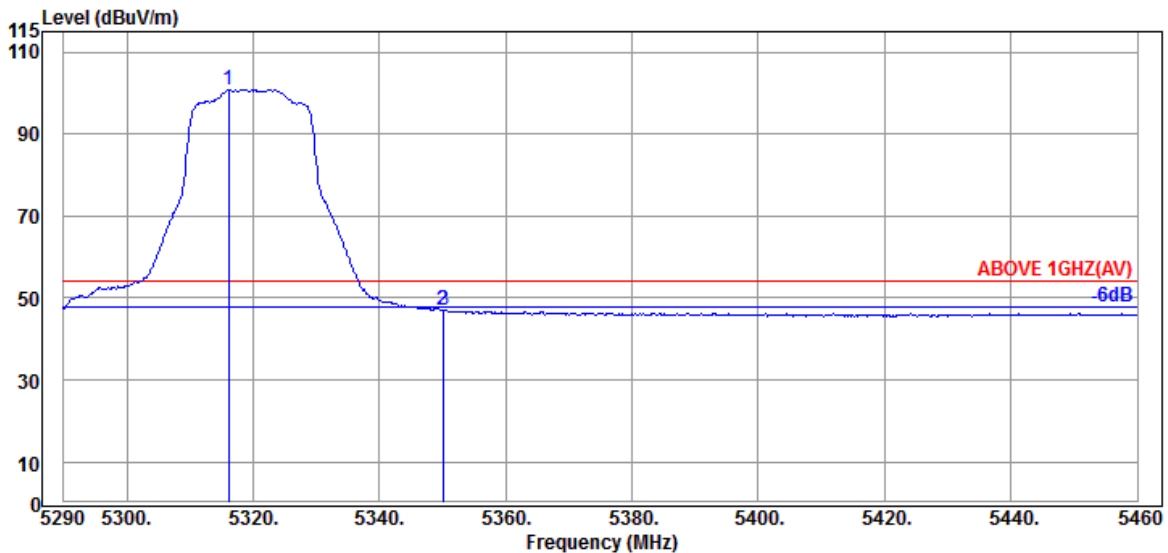


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.180	34.53	10.81	34.29	89.85	100.90	---	---	Average
5350.010	34.60	10.83	34.27	35.97	47.13	54.00	6.87	Average
5350.180	34.60	10.83	34.27	36.00	47.16	54.00	6.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

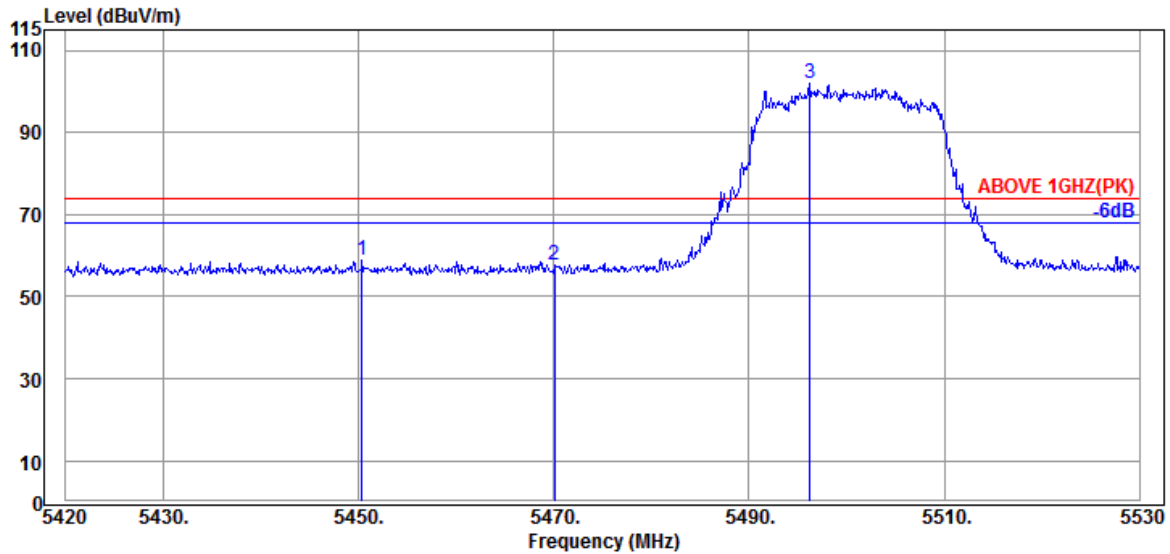

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.360	34.50	10.89	34.24	47.60	58.75	74.00	15.25	Peak
5470.050	34.47	10.91	34.24	46.54	57.68	74.00	16.32	Peak
@ 5496.230	34.40	10.93	34.23	90.74	101.84	---	---	Peak

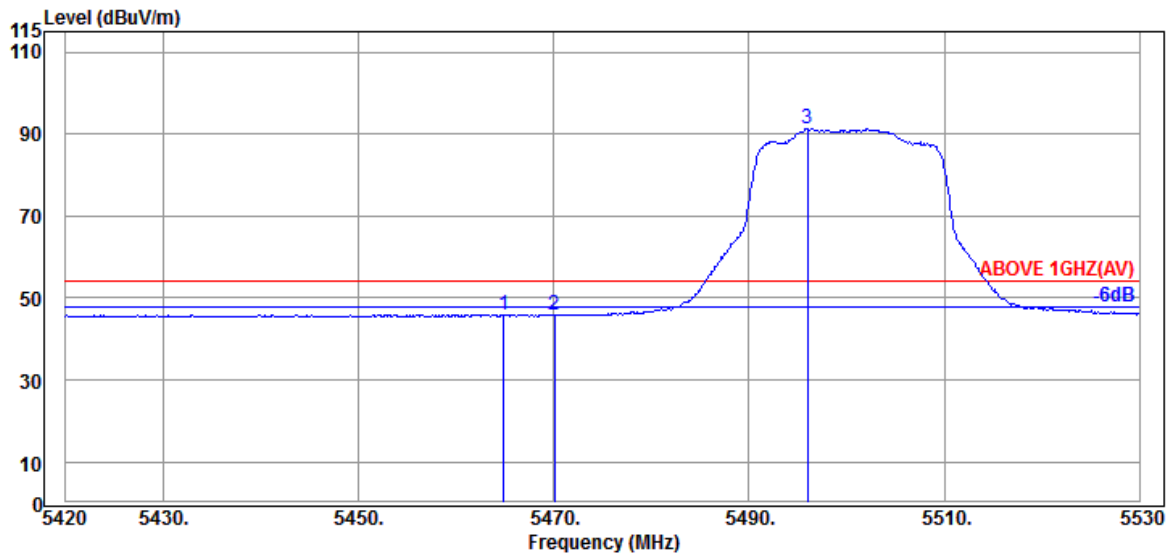


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.880	34.47	10.91	34.24	34.88	46.02	54.00	7.98	Average
5470.050	34.47	10.91	34.24	34.67	45.81	54.00	8.19	Average
@ 5496.010	34.40	10.93	34.23	80.21	91.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

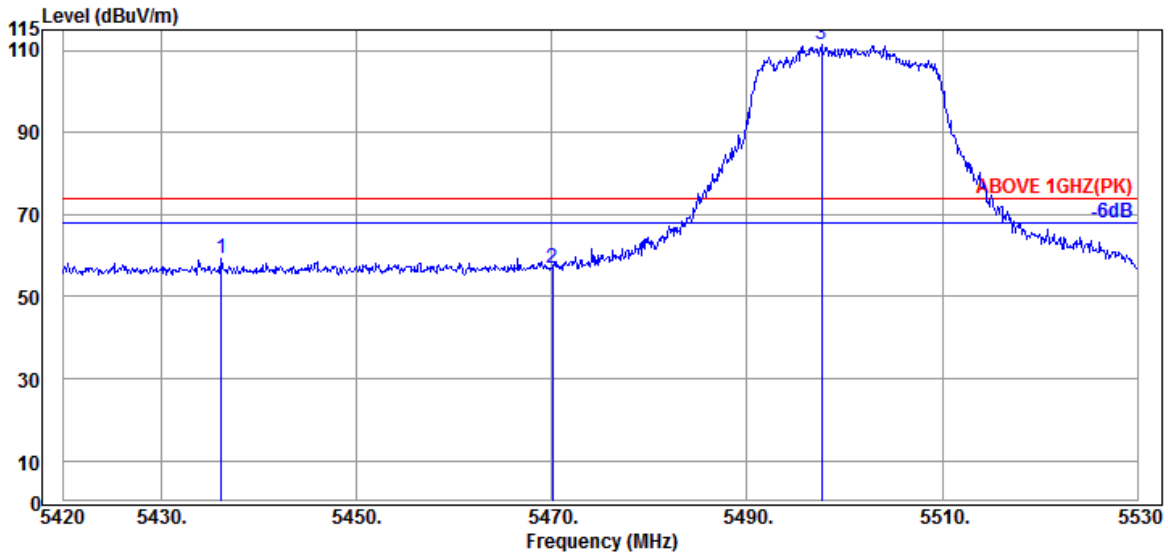

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.170	34.55	10.89	34.25	48.23	59.42	74.00	14.58	Peak
5470.050	34.47	10.91	34.24	45.70	56.84	74.00	17.16	Peak
@ 5497.660	34.40	10.93	34.23	100.25	111.35	---	---	Peak

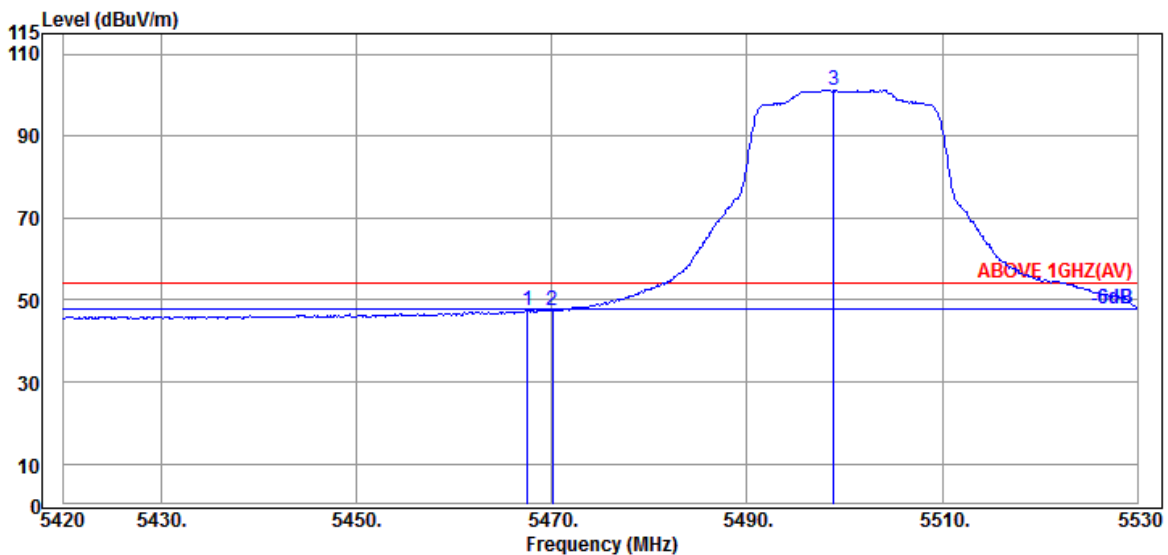


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.520	34.47	10.91	34.24	36.46	47.60	54.00	6.40	Average
5470.050	34.47	10.91	34.24	36.20	47.34	54.00	6.66	Average
@ 5498.870	34.40	10.93	34.23	90.13	101.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

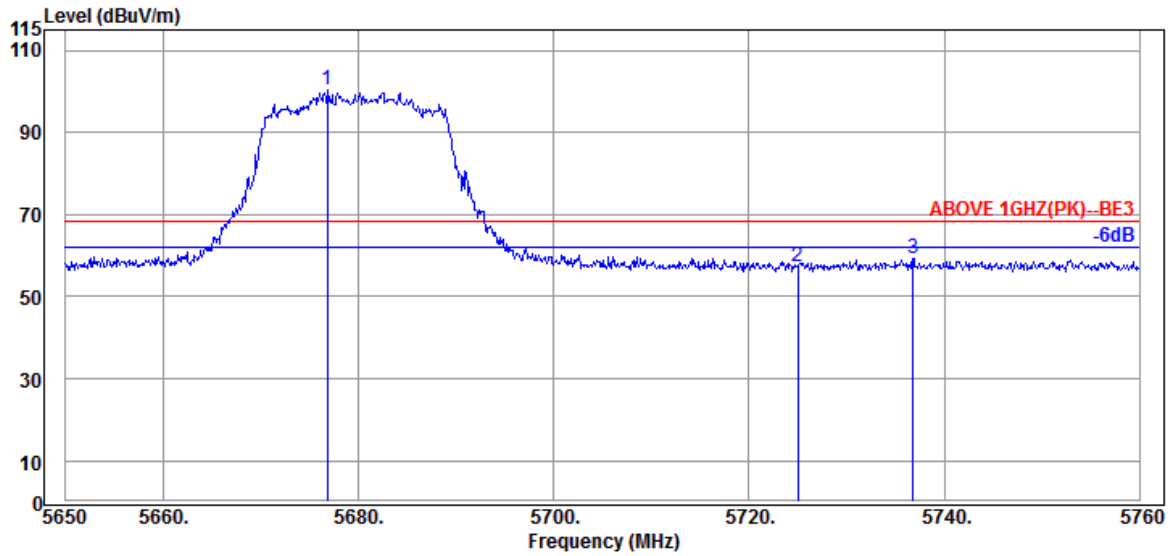

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.840	34.40	11.03	34.30	89.25	100.38	---	---	Peak
5725.020	34.67	11.05	34.32	45.77	57.17	68.20	11.03	Peak
5736.790	34.67	11.05	34.33	47.85	59.24	68.20	8.96	Peak

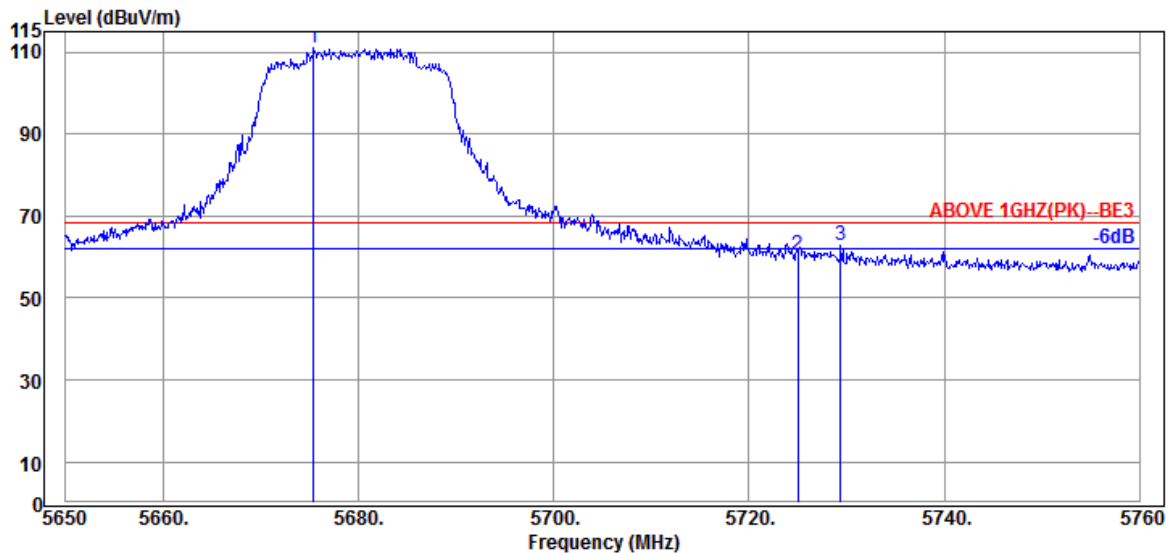


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.410	34.40	11.03	34.30	99.97	111.10	---	---	Peak
5725.020	34.67	11.05	34.32	49.06	60.46	68.20	7.74	Peak
5729.420	34.67	11.05	34.32	51.26	62.66	68.20	5.54	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

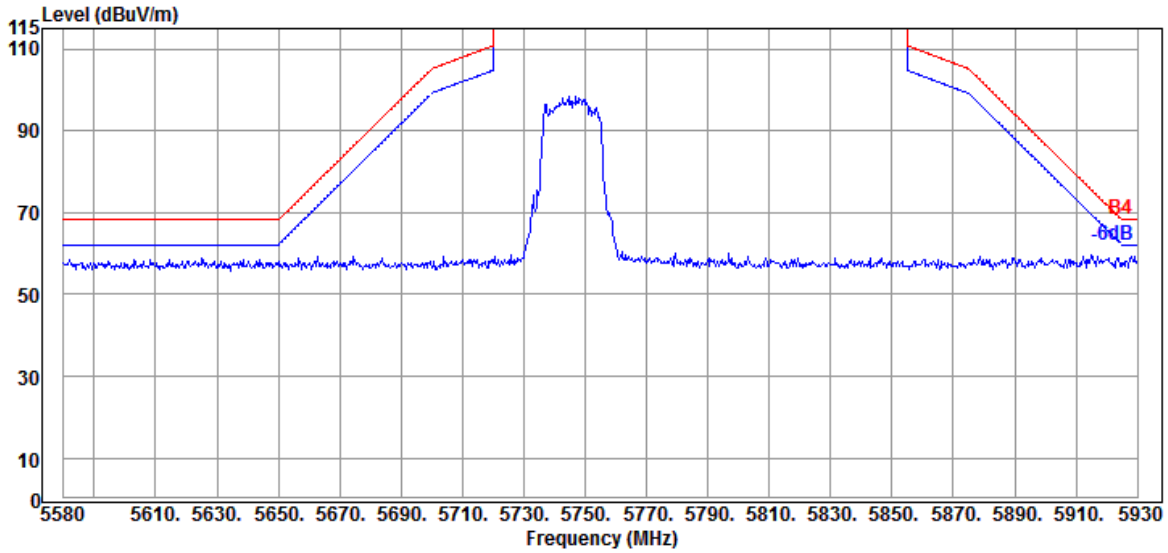


Antenna at Vertical Polarization

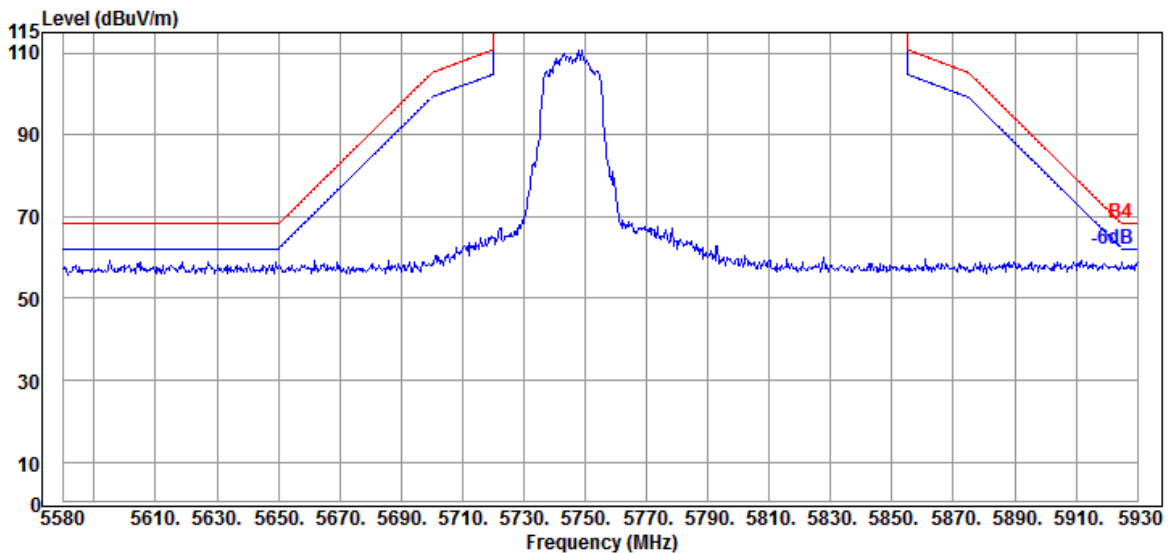


Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

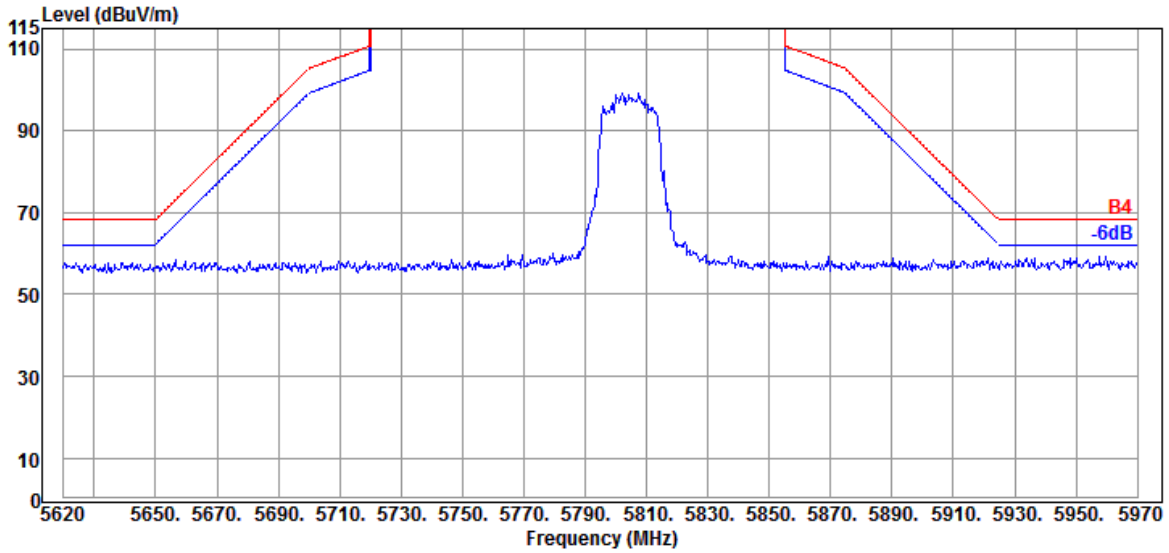

Antenna at Vertical Polarization

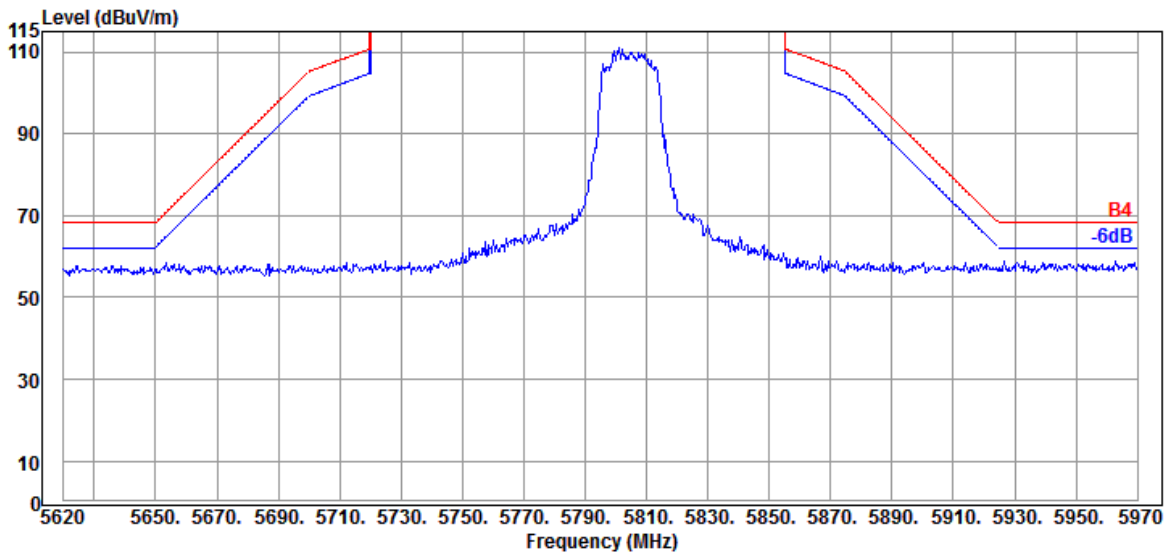


Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

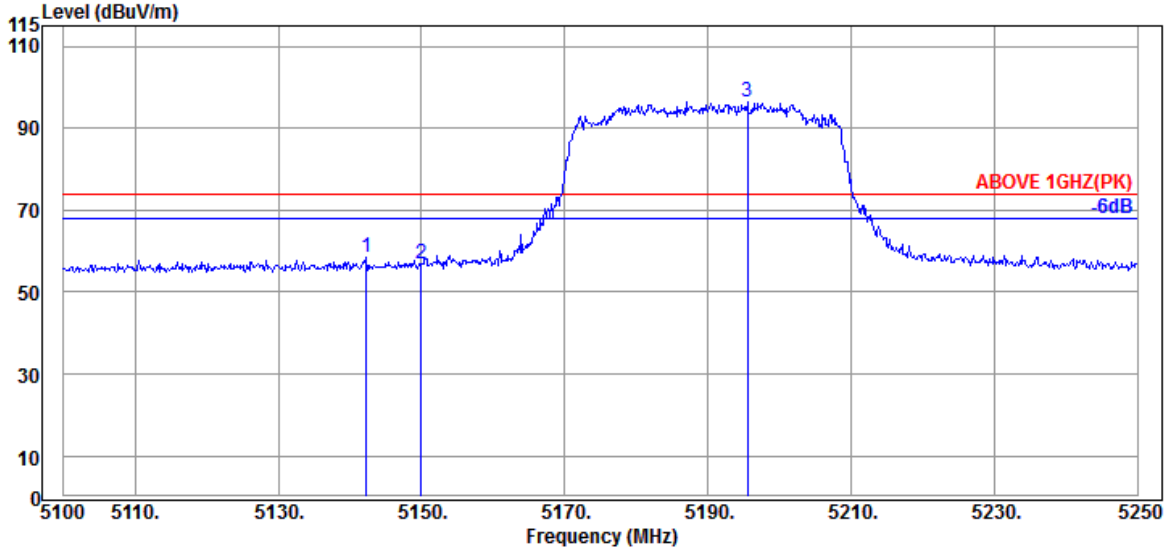

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.300	34.20	10.70	34.36	48.06	58.60	74.00	15.40	Peak
5149.950	34.20	10.70	34.35	46.41	56.96	74.00	17.04	Peak
@ 5195.550	34.20	10.74	34.33	85.92	96.53	---	---	Peak

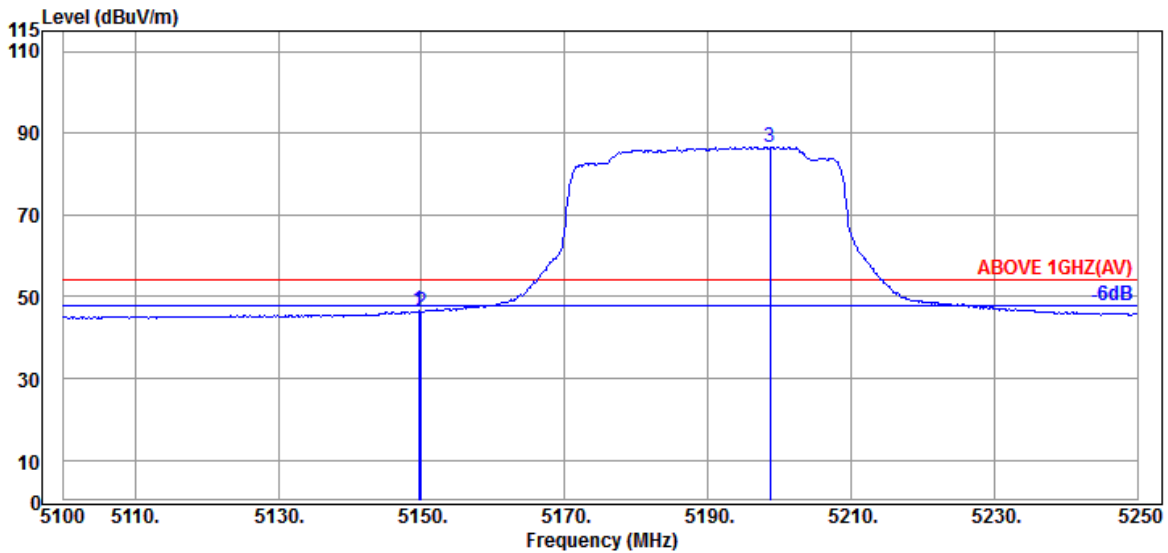


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	10.70	34.35	36.15	46.70	54.00	7.30	Average
5149.950	34.20	10.70	34.35	35.71	46.26	54.00	7.74	Average
@ 5198.700	34.20	10.74	34.33	75.99	86.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

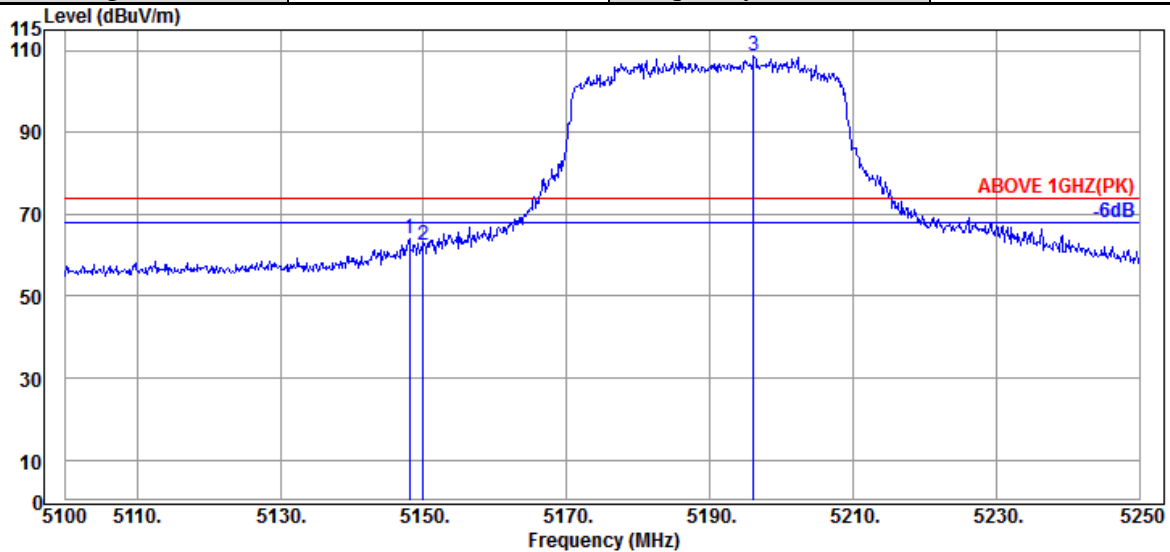

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	34.20	10.70	34.35	53.30	63.85	74.00	10.15	Peak
5149.950	34.20	10.70	34.35	51.96	62.51	74.00	11.49	Peak
@ 5196.150	34.20	10.74	34.33	98.07	108.68	---	---	Peak

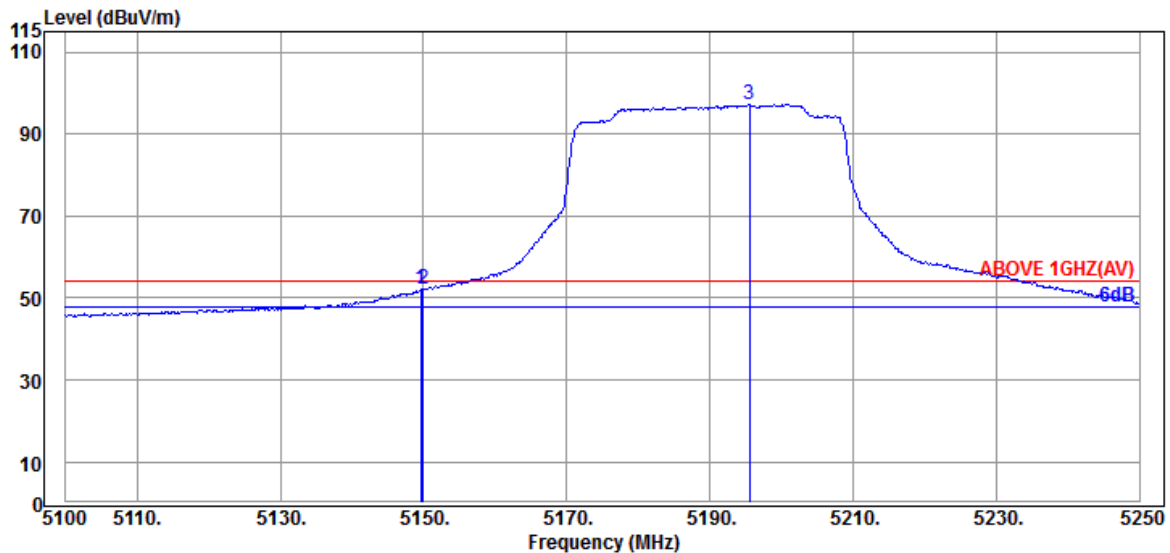

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	10.70	34.35	41.47	52.02	54.00	1.98	Average
5149.950	34.20	10.70	34.35	41.68	52.23	54.00	1.77	Average
@ 5195.550	34.20	10.74	34.33	86.65	97.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

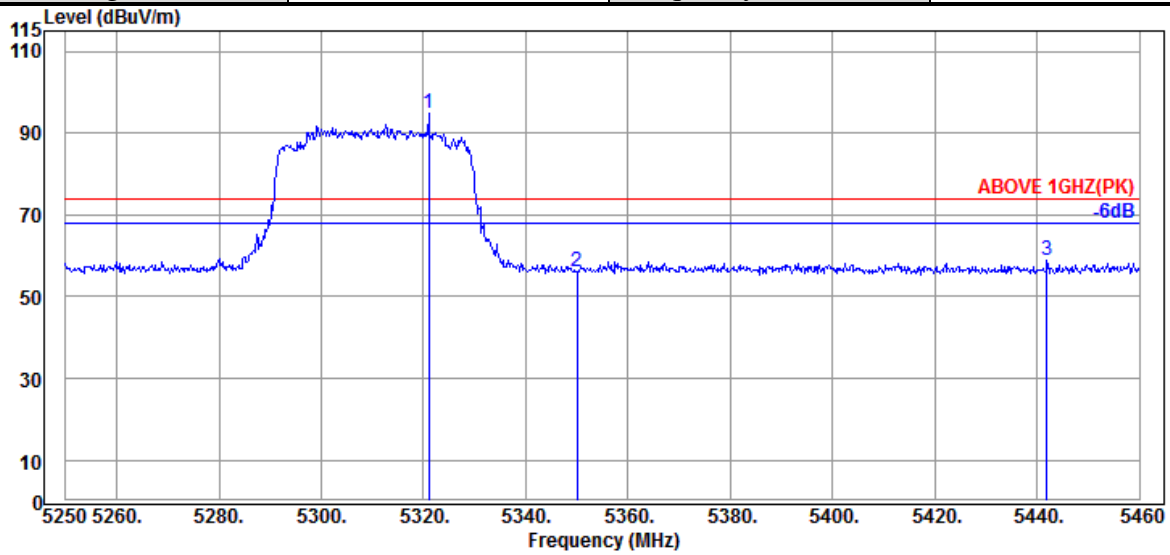

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.910	34.50	10.81	34.29	84.60	95.62	---	---	Peak
5349.960	34.60	10.83	34.27	45.51	56.67	74.00	17.33	Peak
5373.480	34.67	10.85	34.27	47.17	58.42	74.00	15.58	Peak

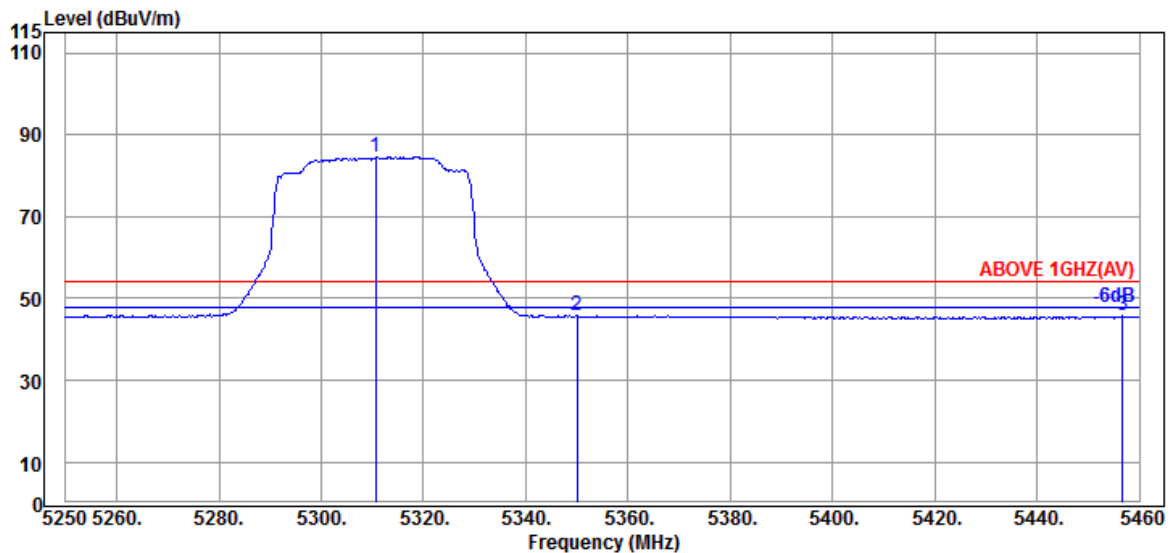


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.690	34.53	10.81	34.29	73.55	84.60	---	---	Average
5349.960	34.60	10.83	34.27	34.57	45.73	54.00	8.27	Average
5456.640	34.50	10.89	34.24	34.56	45.71	54.00	8.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

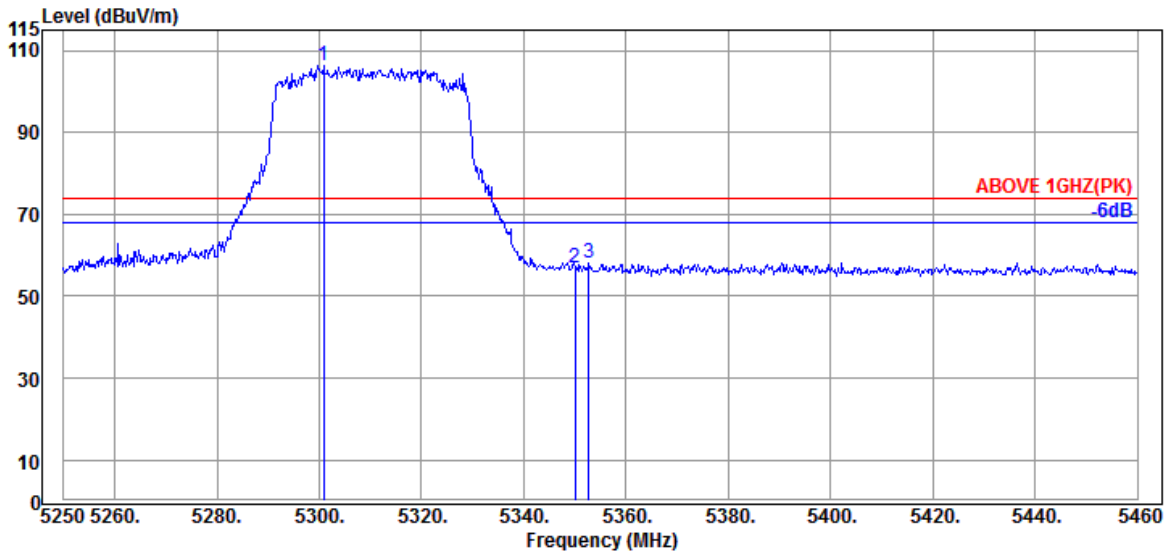

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.820	34.50	10.81	34.29	95.46	106.48	---	---	Peak
5349.960	34.60	10.83	34.27	45.93	57.09	74.00	16.91	Peak
5352.690	34.60	10.83	34.27	47.06	58.22	74.00	15.78	Peak

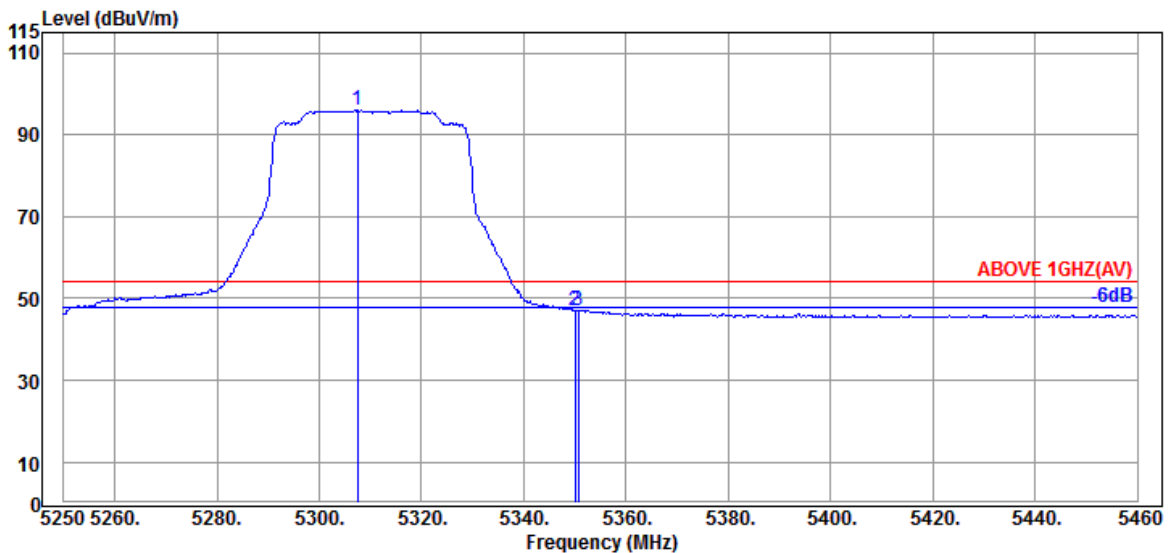


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.540	34.50	10.81	34.29	84.98	96.00	---	---	Average
5349.960	34.60	10.83	34.27	35.91	47.07	54.00	6.93	Average
5350.590	34.60	10.83	34.27	36.01	47.17	54.00	6.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

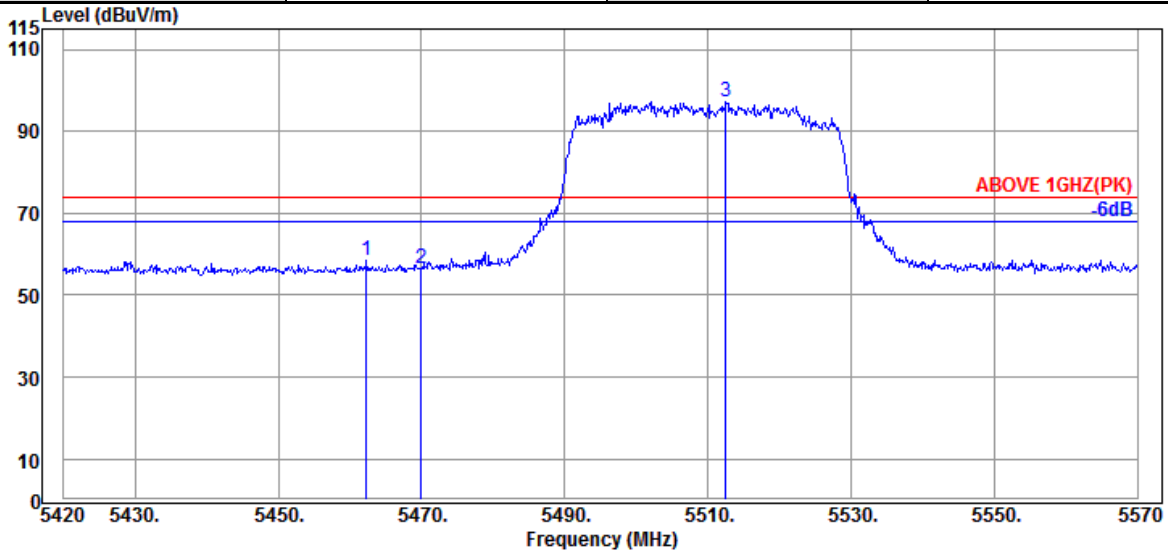

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.50	10.91	34.24	47.14	58.31	74.00	15.69	Peak
5469.950	34.47	10.91	34.24	45.35	56.49	74.00	17.51	Peak
@ 5512.550	34.37	10.93	34.24	86.21	97.27	---	---	Peak

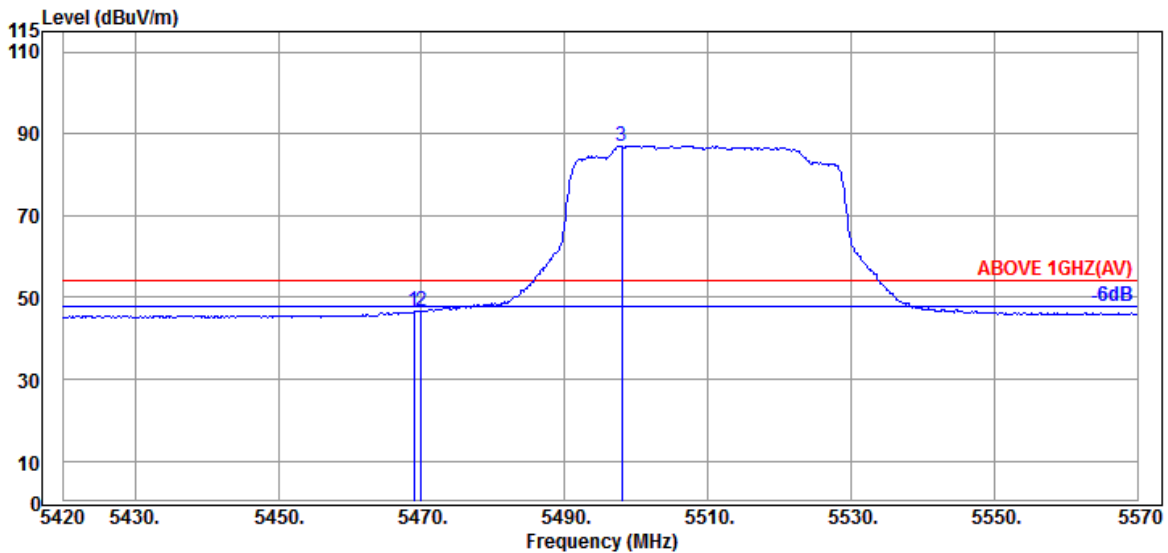


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	35.35	46.49	54.00	7.51	Average
5469.950	34.47	10.91	34.24	35.33	46.47	54.00	7.53	Average
@ 5498.000	34.40	10.93	34.23	76.03	87.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

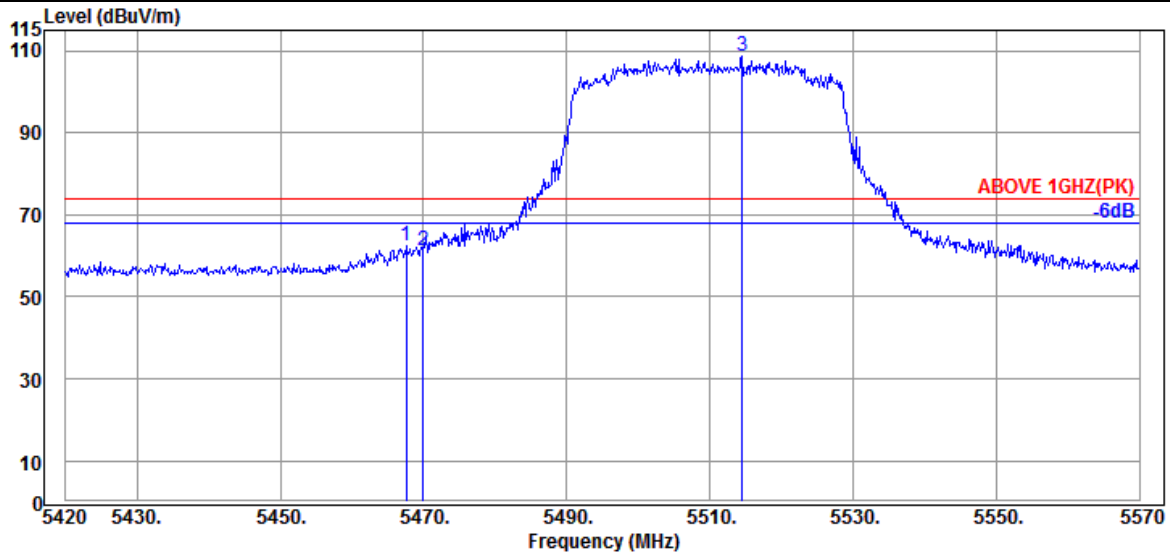

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.550	34.47	10.91	34.24	51.19	62.33	74.00	11.67	Peak
5469.950	34.47	10.91	34.24	50.16	61.30	74.00	12.70	Peak
@ 5514.500	34.37	10.93	34.24	97.52	108.58	---	---	Peak

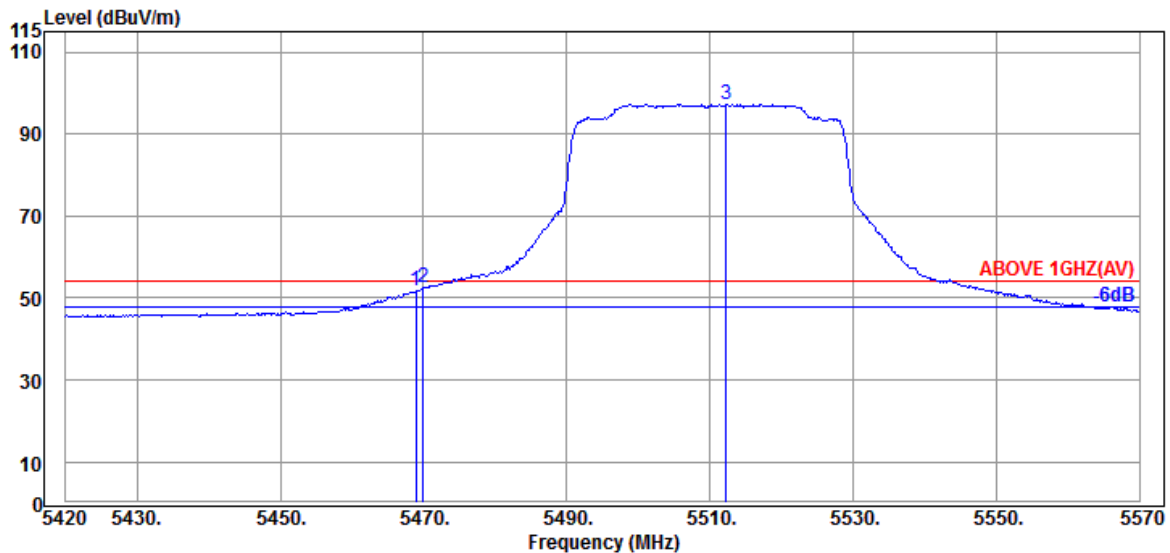


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	40.63	51.77	54.00	2.23	Average
5469.950	34.47	10.91	34.24	41.27	52.41	54.00	1.59	Average
@ 5512.250	34.37	10.93	34.24	86.25	97.31	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

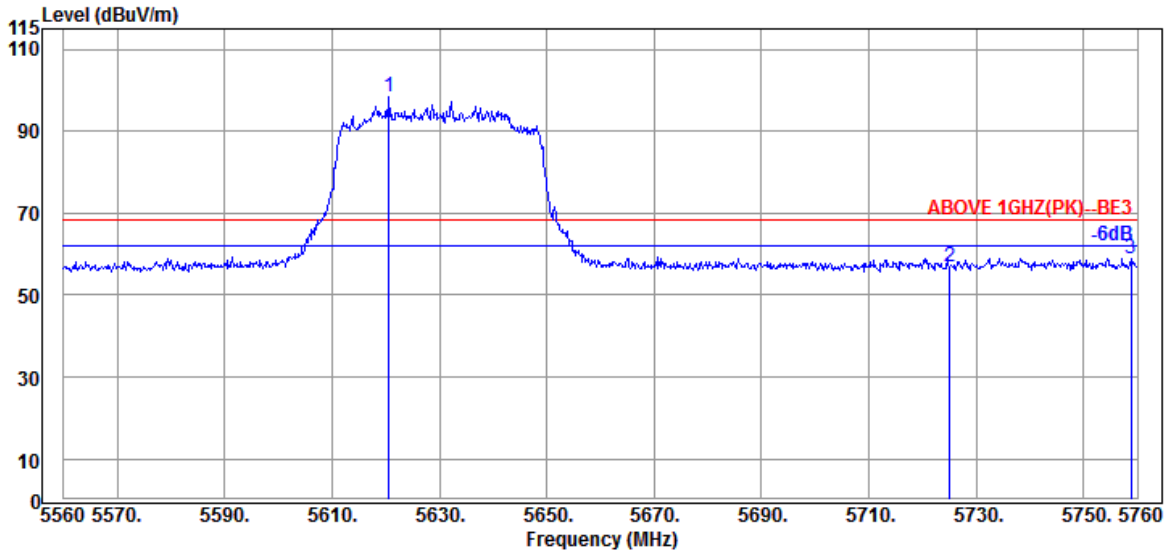

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5620.600	34.40	10.99	34.28	87.10	98.21	---	---	Peak
5725.000	34.67	11.05	34.32	45.33	56.73	68.20	11.47	Peak
5758.800	34.87	11.06	34.35	47.41	58.99	68.20	9.21	Peak

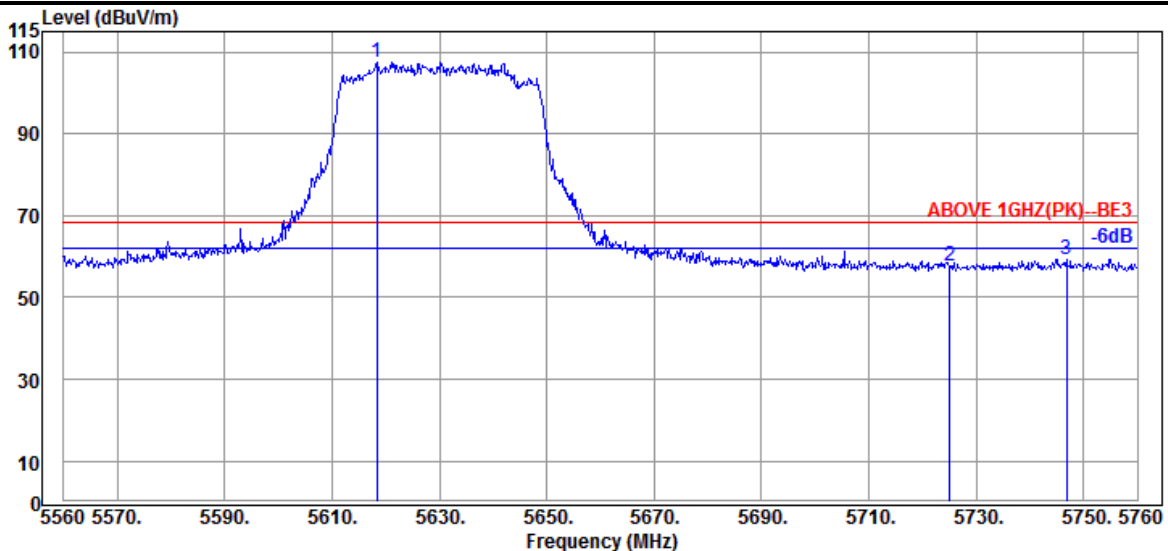


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5618.400	34.40	10.99	34.28	96.54	107.65	---	---	Peak
5725.000	34.67	11.05	34.32	46.40	57.80	68.20	10.40	Peak
5746.800	34.80	11.06	34.33	47.93	59.46	68.20	8.74	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

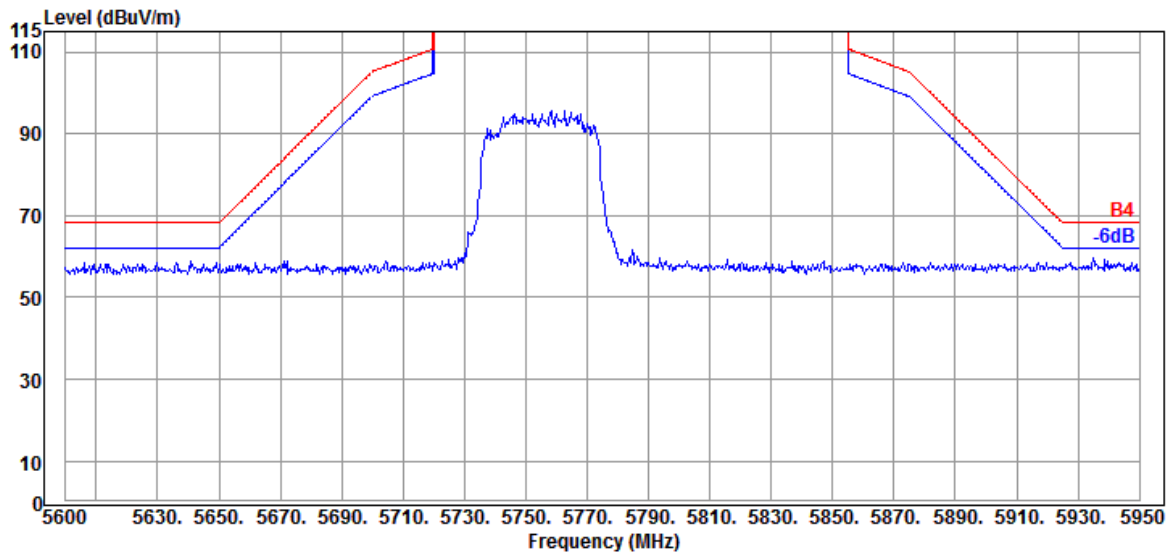


Antenna at Vertical Polarization

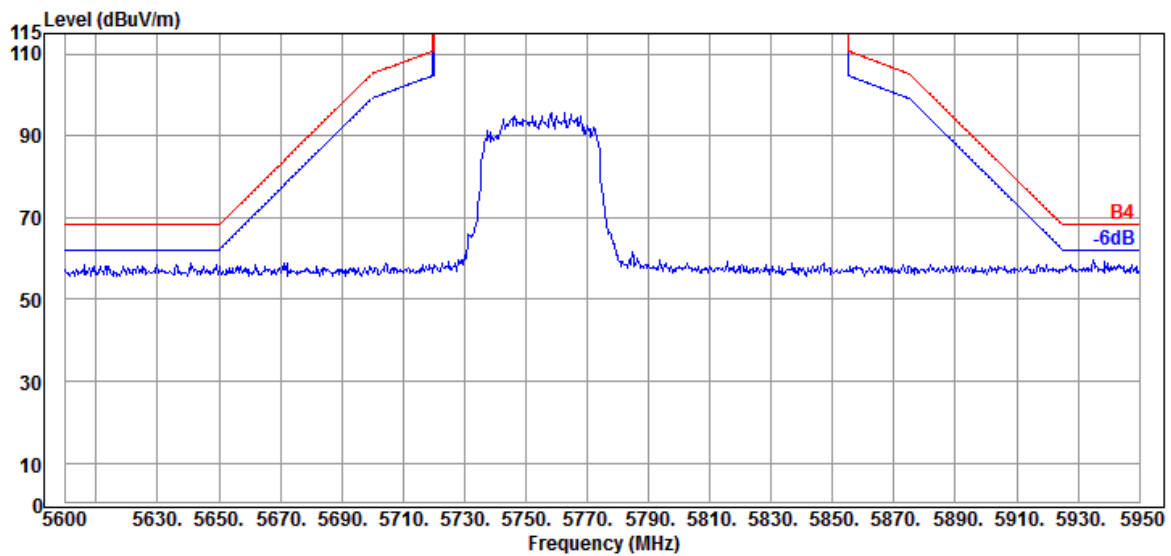


Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

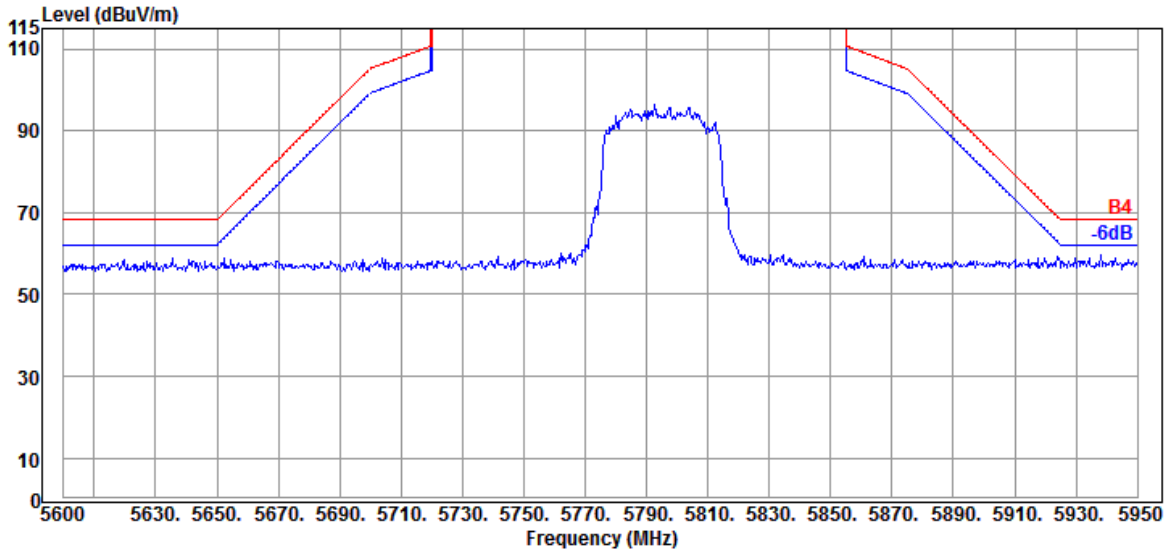

Antenna at Vertical Polarization

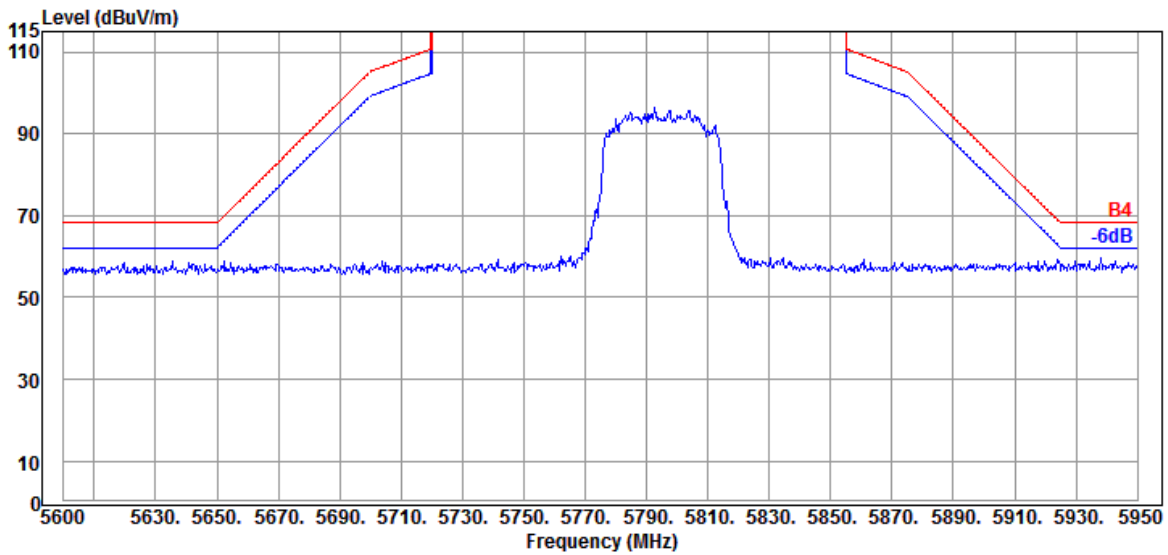


Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

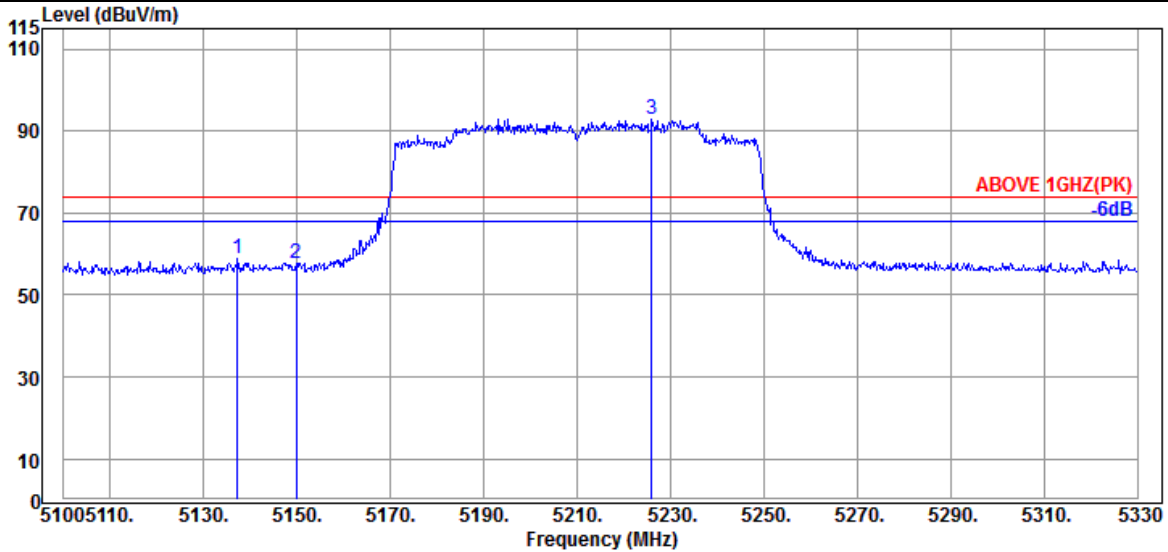

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.260	34.17	10.70	34.36	48.20	58.71	74.00	15.29	Peak
5149.910	34.20	10.70	34.35	47.14	57.69	74.00	16.31	Peak
@ 5226.040	34.30	10.76	34.32	82.30	93.04	---	---	Peak

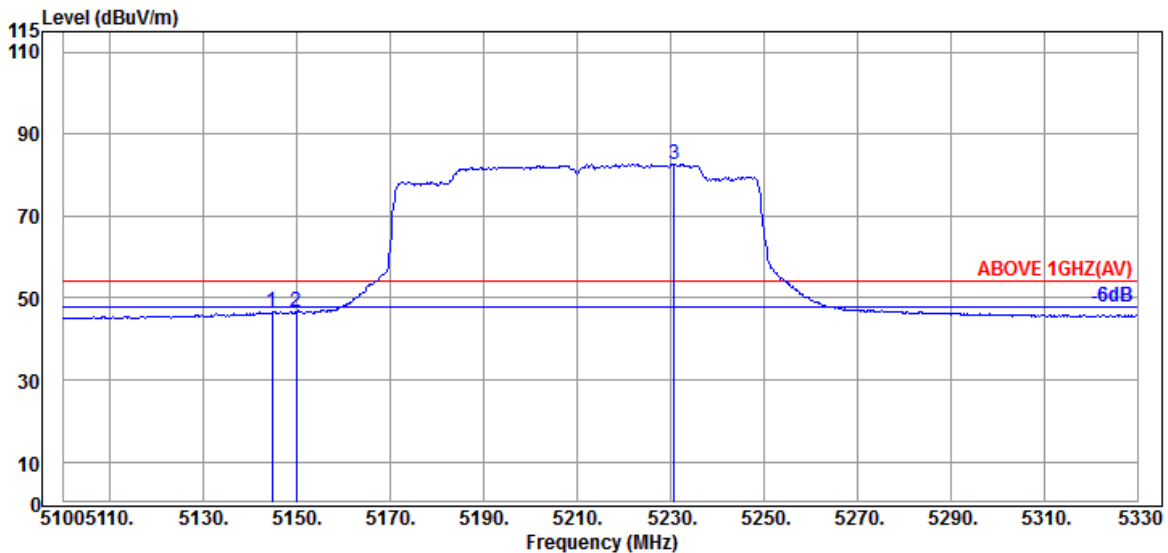


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.620	34.20	10.70	34.35	36.25	46.80	54.00	7.20	Average
5149.910	34.20	10.70	34.35	36.08	46.63	54.00	7.37	Average
@ 5230.870	34.30	10.76	34.32	71.94	82.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

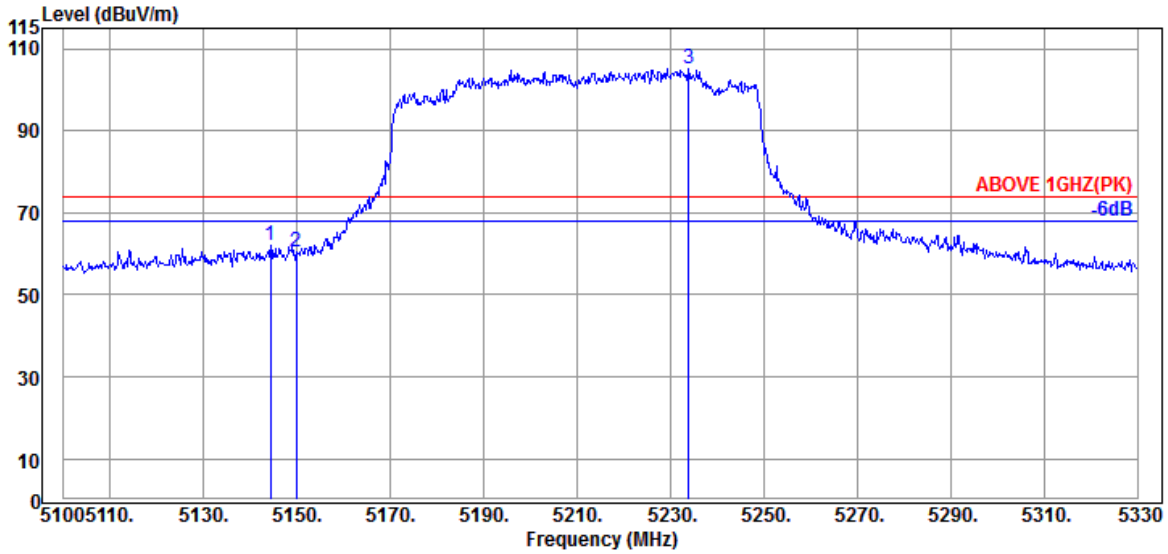

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.390	34.20	10.70	34.35	51.32	61.87	74.00	12.13	Peak
5149.910	34.20	10.70	34.35	50.06	60.61	74.00	13.39	Peak
@ 5233.860	34.35	10.76	34.32	94.29	105.08	---	---	Peak

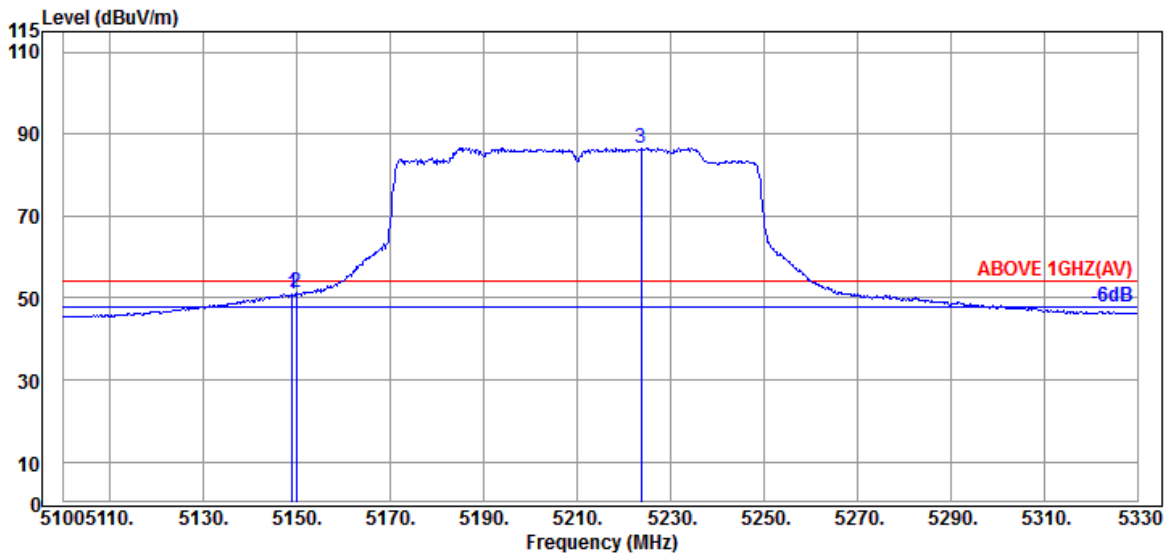


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	34.20	10.70	34.35	41.00	51.55	54.00	2.45	Average
5149.910	34.20	10.70	34.35	40.43	50.98	54.00	3.02	Average
@ 5233.630	34.35	10.76	34.32	84.24	95.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

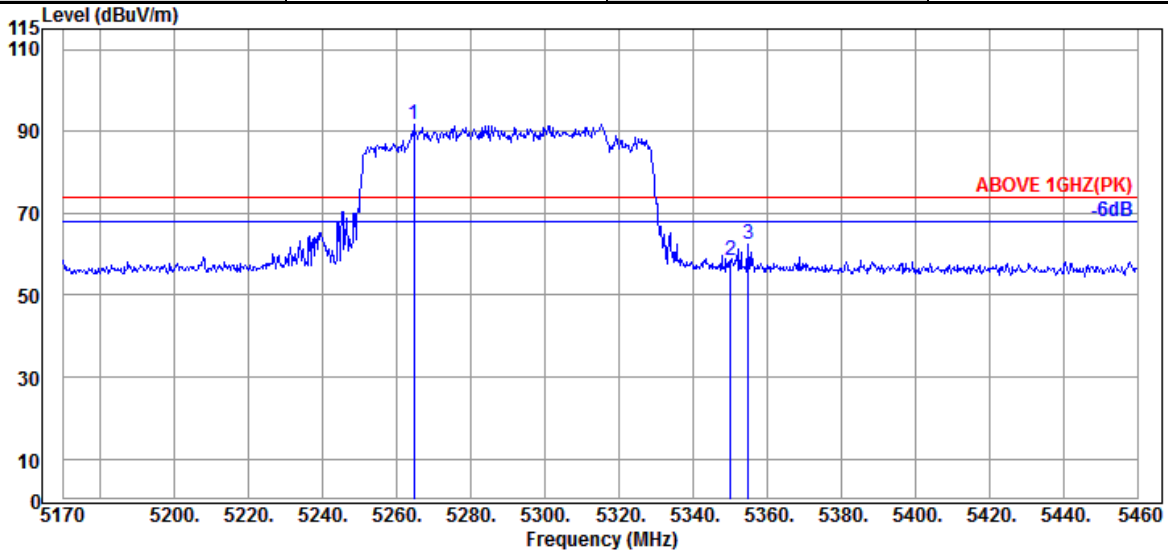

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5264.540	34.43	10.79	34.31	80.95	91.86	---	---	Peak
5350.090	34.60	10.83	34.27	47.27	58.43	74.00	15.57	Peak
5355.020	34.63	10.83	34.27	51.07	62.26	74.00	11.74	Peak

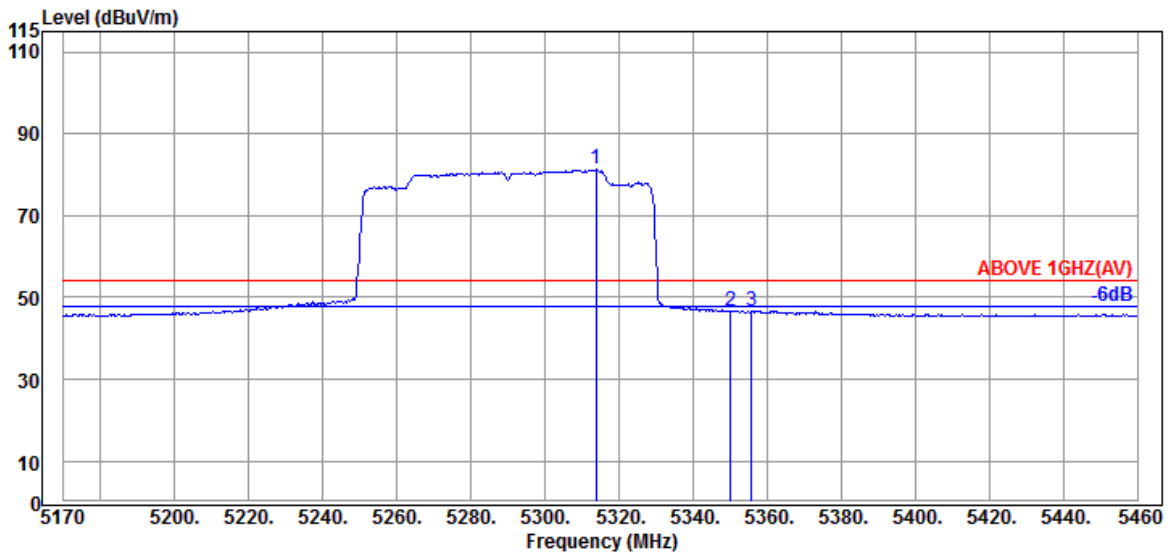


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.840	34.53	10.81	34.29	70.17	81.22	---	---	Average
5350.090	34.60	10.83	34.27	35.54	46.70	54.00	7.30	Average
5355.890	34.63	10.85	34.27	35.46	46.67	54.00	7.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

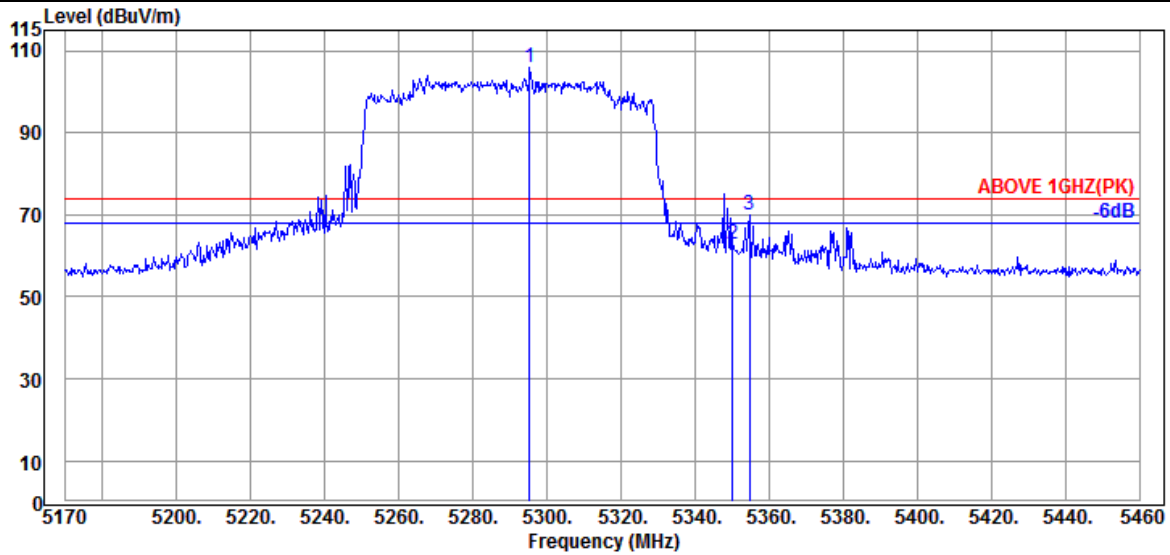

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5295.280	34.50	10.81	34.30	95.04	106.05	---	---	Peak
5350.090	34.60	10.83	34.27	51.77	62.93	74.00	11.07	Peak
5354.730	34.63	10.83	34.27	58.78	69.97	74.00	4.03	Peak

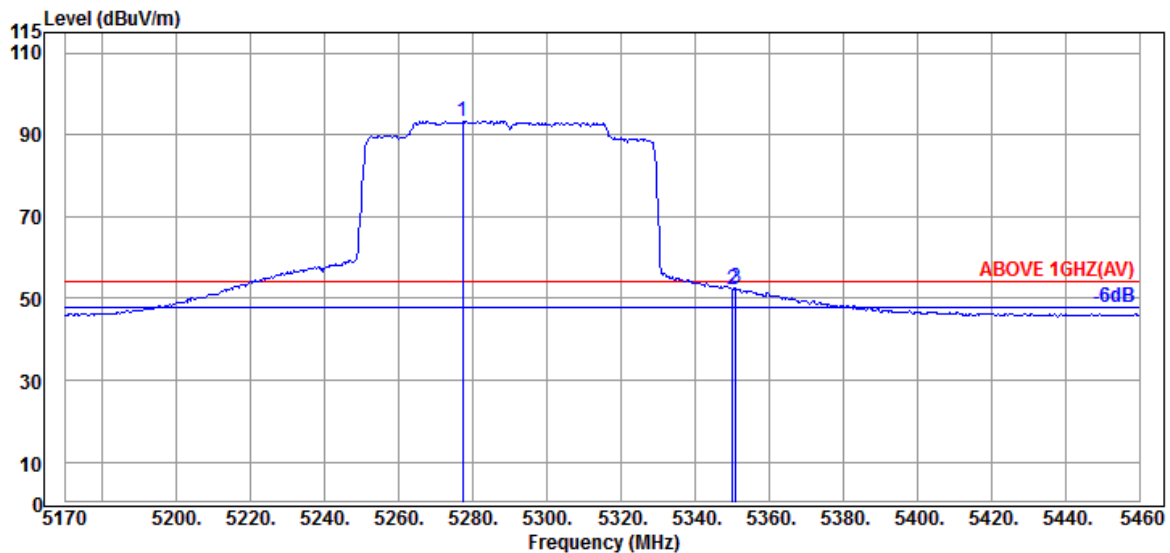


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5277.300	34.47	10.79	34.30	82.47	93.43	---	---	Average
5350.090	34.60	10.83	34.27	41.05	52.21	54.00	1.79	Average
5350.960	34.60	10.83	34.27	41.31	52.47	54.00	1.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

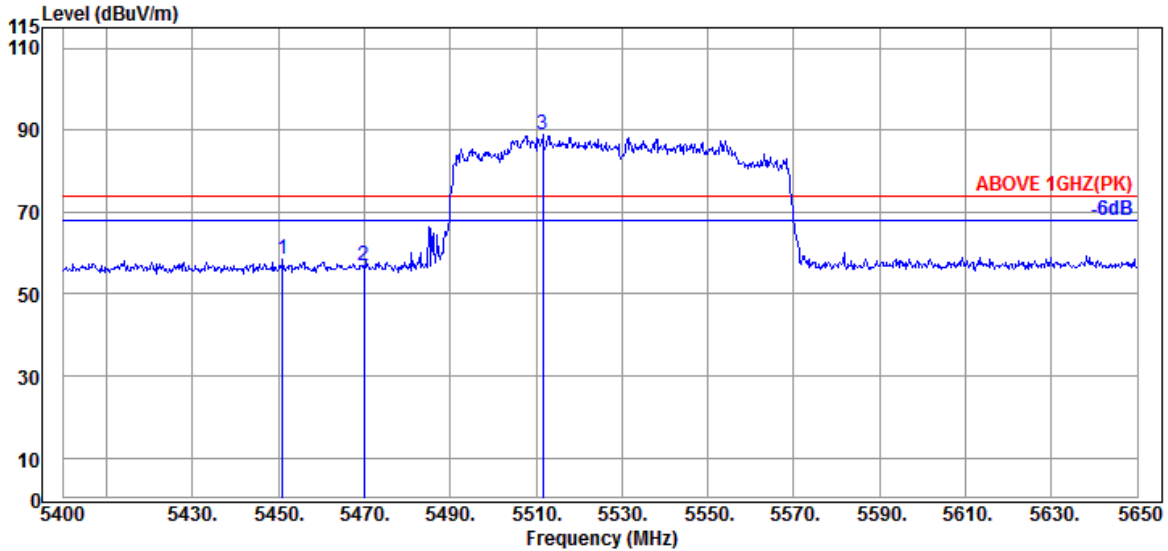

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.000	34.50	10.89	34.24	47.23	58.38	74.00	15.62	Peak
5470.000	34.47	10.91	34.24	45.63	56.77	74.00	17.23	Peak
@ 5511.500	34.37	10.93	34.24	77.97	89.03	---	---	Peak

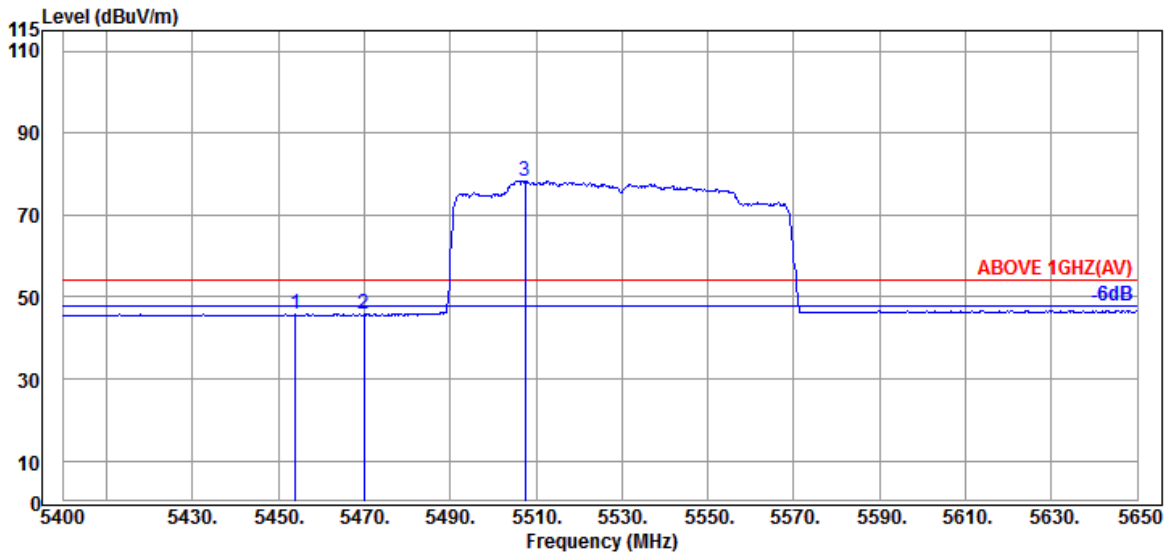


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.000	34.50	10.89	34.24	34.69	45.84	54.00	8.16	Average
5470.000	34.47	10.91	34.24	34.72	45.86	54.00	8.14	Average
@ 5507.500	34.40	10.93	34.24	67.19	78.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

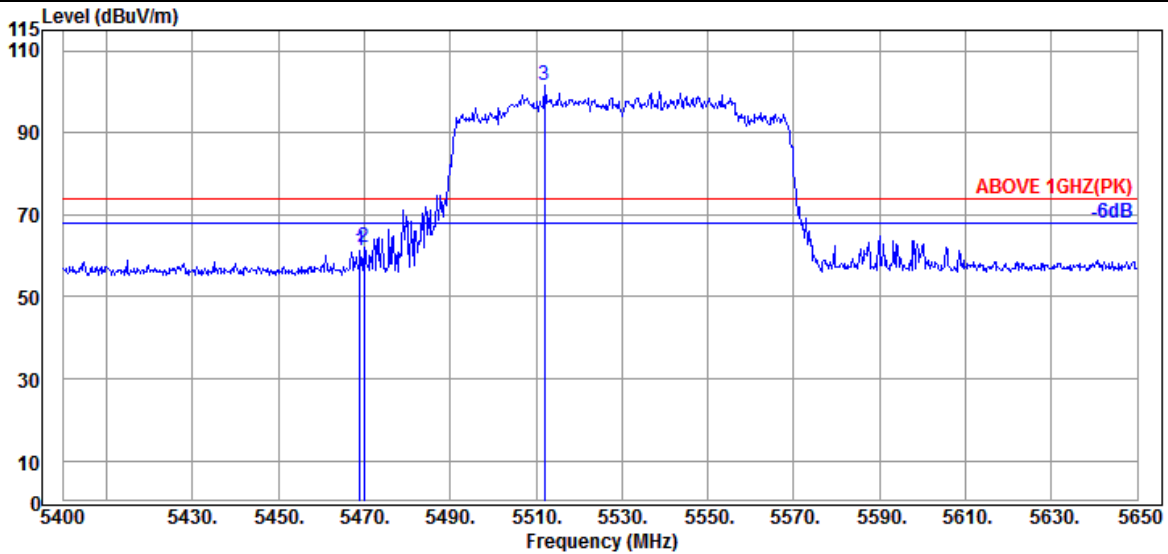

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	10.91	34.24	50.03	61.17	74.00	12.83	Peak
5470.000	34.47	10.91	34.24	51.04	62.18	74.00	11.82	Peak
@ 5512.000	34.37	10.93	34.24	90.37	101.43	---	---	Peak

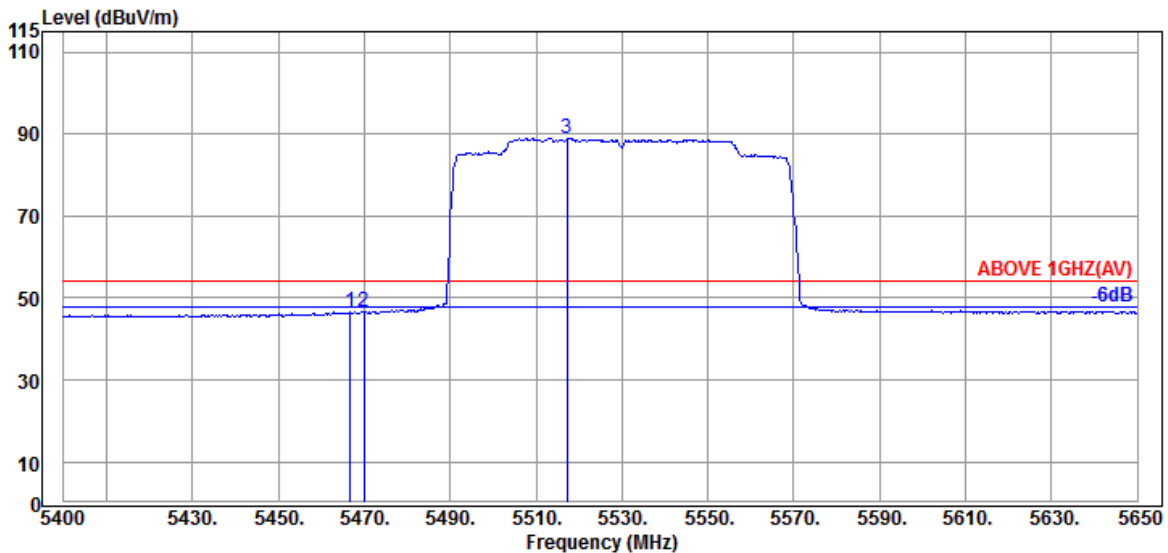


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.750	34.47	10.91	34.24	35.64	46.78	54.00	7.22	Average
5470.000	34.47	10.91	34.24	35.57	46.71	54.00	7.29	Average
@ 5517.250	34.37	10.93	34.24	77.95	89.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

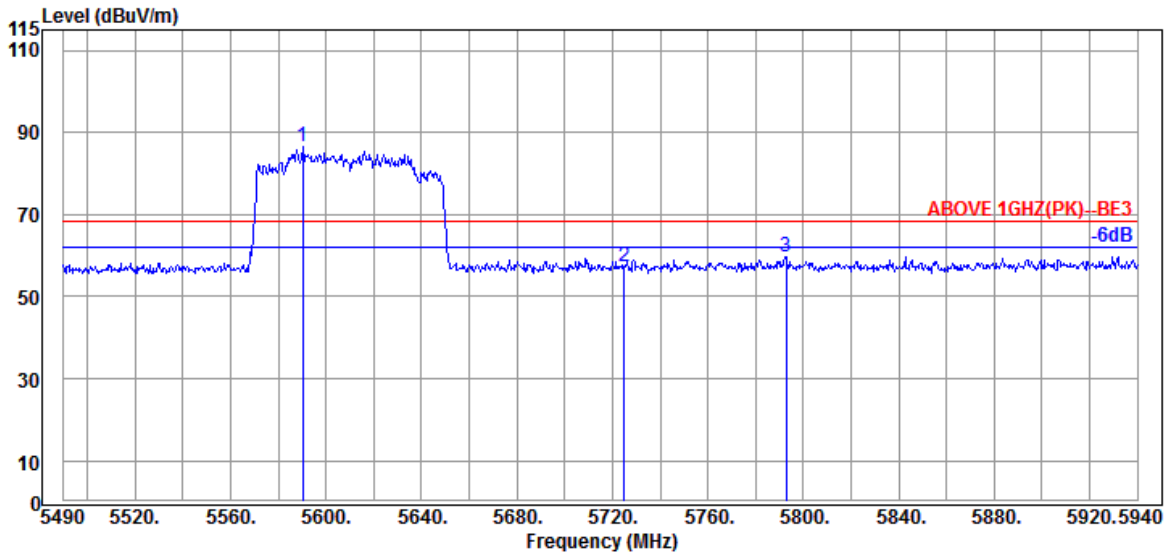

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5590.350	34.37	10.97	34.27	75.59	86.66	---	---	Peak
5724.900	34.67	11.05	34.32	45.98	57.38	68.20	10.82	Peak
5792.850	35.00	11.08	34.36	47.96	59.68	68.20	8.52	Peak

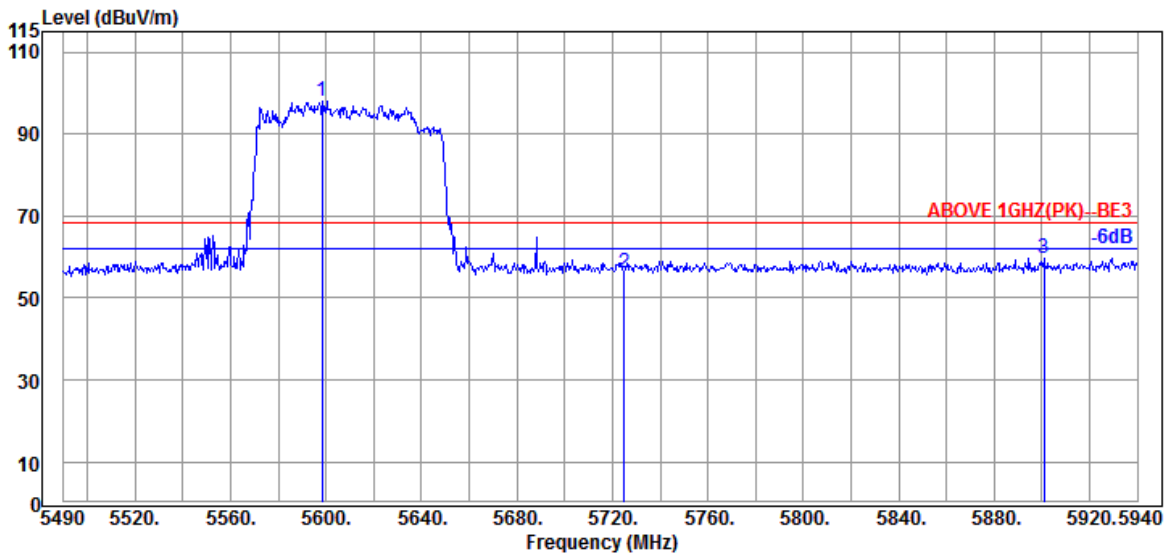

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5598.450	34.40	10.97	34.27	87.01	98.11	---	---	Peak
5724.900	34.67	11.05	34.32	44.85	56.25	68.20	11.95	Peak
5900.850	35.40	11.14	34.40	47.69	59.83	68.20	8.37	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.39	48.37	54.00	5.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.01	47.99	54.00	6.01	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.50	48.59	54.00	5.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.38	48.47	54.00	5.53	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	30.49	49.41	54.00	4.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	31.20	50.12	54.00	3.88	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.38	48.78	54.00	5.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.56	48.96	54.00	5.04	Peak

Mode	802.11a	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	30.83	50.40	54.00	3.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	29.86	49.43	54.00	4.57	Peak

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.41	48.39	54.00	5.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	30.19	48.17	54.00	5.83	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.17	48.26	54.00	5.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	31.61	49.70	54.00	4.30	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	29.50	48.42	54.00	5.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	29.28	48.20	54.00	5.80	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	31.30	50.70	54.00	3.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.64	49.04	54.00	4.96	Peak

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	29.98	49.55	54.00	4.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	31.58	51.15	54.00	2.85	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.11	48.01	54.00	5.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.09	47.99	54.00	6.01	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	29.54	47.67	54.00	6.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	29.48	47.61	54.00	6.39	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	28.65	47.87	54.00	6.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	29.14	48.36	54.00	5.64	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	28.78	48.18	54.00	5.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	30.00	49.40	54.00	4.60	Peak

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	30.58	50.18	54.00	3.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	29.51	49.11	54.00	4.89	Peak

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	30.15	47.96	54.00	6.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	29.91	47.72	54.00	6.28	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	29.10	47.32	54.00	6.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	29.06	47.28	54.00	6.72	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	28.82	47.87	54.00	6.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	29.19	48.24	54.00	5.76	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	28.68	47.96	54.00	6.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	29.09	48.37	54.00	5.63	Peak

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	30.18	49.72	54.00	4.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	31.12	50.66	54.00	3.34	Peak

Mode	802.11ac-VHT160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	29.28	47.37	54.00	6.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	30.19	48.28	54.00	5.72	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	29.28	48.14	54.00	5.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	29.79	48.65	54.00	5.35	Peak

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	29.41	47.39	54.00	6.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	29.98	47.96	54.00	6.04	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	30.32	48.41	54.00	5.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	29.57	47.66	54.00	6.34	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	29.22	48.14	54.00	5.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	29.62	48.54	54.00	5.46	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.64	49.04	54.00	4.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.71	49.11	54.00	4.89	Peak

Mode	802.11ax-HE20	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	30.69	50.26	54.00	3.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	30.48	50.05	54.00	3.95	Peak

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.03	47.93	54.00	6.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	30.74	48.64	54.00	5.36	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	29.18	47.31	54.00	6.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	29.89	48.02	54.00	5.98	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	28.67	47.89	54.00	6.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	29.27	48.49	54.00	5.51	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	29.17	48.57	54.00	5.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	30.10	49.50	54.00	4.50	Peak

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	30.26	49.86	54.00	4.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	30.51	50.11	54.00	3.89	Peak

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	29.99	47.80	54.00	6.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	31.26	49.07	54.00	4.93	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	29.90	48.12	54.00	5.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	30.16	48.38	54.00	5.62	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	29.10	48.15	54.00	5.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	29.43	48.48	54.00	5.52	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	29.92	49.20	54.00	4.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	28.75	48.03	54.00	5.97	Peak

Mode	802.11ax-HE80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	29.80	49.34	54.00	4.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	30.04	49.58	54.00	4.42	Peak

Mode	802.11ax-HE160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	29.98	48.07	54.00	5.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	29.46	47.55	54.00	6.45	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	29.81	48.67	54.00	5.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	29.27	48.13	54.00	5.87	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.