

FCC 15.247 & RSS-247 2.4 GHz Test Report

for

LG Electronics Inc.

**222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do,
451-713, Korea**

Product Name : Notebook Computer
Model Name : 15Z995
Brand : LG
FCC ID : BEJNT-15Z995
IC : 2703H-15Z995

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION.....	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Antenna Information	9
3.4. EUT Specifications Assessed in Current Report.....	9
3.5. Descriptions of Key Components.....	12
3.6. Test Configuration.....	13
3.7. Tested Supporting System List.....	19
3.8. Setup Configuration.....	19
3.9. Operating Condition of EUT	19
3.10. Description of Test Facility	20
3.11. Measurement Uncertainty	21
4. MEASUREMENT EQUIPMENT LIST	22
4.1. Conducted Emission Measurement	22
4.2. Radiated Emission Measurement	23
4.3. RF Conducted Measurement	23
5. CONDUCTED EMISSION.....	24
5.1. Block Diagram of Test Setup	24
5.2. Conducted Emission Limit	24
5.3. Test Procedure	24
5.4. Test Results	24
6. RADIATED EMISSION	25
6.1. Block Diagram of Test Setup	25
6.2. Radiated Emission Limits.....	26
6.3. Test Procedure	27
6.4. Measurement Result Explanation.....	28
6.5. Test Results	28
7. 6dB/OCCUPIED BANDWIDTH.....	29
7.1. Block Diagram of Test Setup	29
7.2. Specification Limits.....	29
7.3. Test Procedure	29
7.4. Test Results	29
8. MAXIMUM PEAK OUTPUT POWER	30
8.1. Block Diagram of Test Setup	30
8.2. Specification Limits.....	30
8.3. Test Procedure	31
8.4. Test Results	31
9. EMISSION LIMITATIONS	32
9.1. Block Diagram of Test Setup	32

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

9.2. Specification Limits.....	32
9.3. Test Procedure.....	32
9.4. Test Results	33
10. POWER SPECTRAL DENSITY	34
10.1. Block Diagram of Test Setup	34
10.2. Specification Limits.....	34
10.3. Test Procedure	34
10.4. Test Results	34
11. DEVIATION TO TEST SPECIFICATIONS	35

APPENDIX A TEST DATA AND PLOTS
APPENDIX B TEST PHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory #1 : LG Electronics Nanjing New Technology Co., Ltd.
Factory #2 : SEO HEUNG ELECTRONICS CO LTD
EUT Description
(1) Product : Notebook Computer
(2) Model : 15Z995
(3) Brand : LG
(4) Power Supply: DC 19V, 2.53A

Applicable Standards:

47 CFR FCC Part 15 Subpart C
RSS-Gen (Issue 5), April 2018
RSS-247 (Issue 2), February 2017
ANSI C63.10:2013

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2019. 12. 30

Reviewed by: Annie Yu (Annie Yu/Administrator)

Approved by: Johnny Hsueh (Johnny Hsueh/Section Manager)

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Data	Revision Summary	Report Number
0	2019. 12. 30	Original Report	EM-F190532

2. SUMMARY OF TEST RESULTS

Rule		Description	Data Reused	Results
FCC	IC			
15.207	RSS-Gen §8.8	Conducted Emission	No	PASS
15.247(d)/ 15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	No	PASS
15.247(a)(2)	RSS-247 §5.2(1)	6dB/Occupied Bandwidth	Yes	PASS
15.247(b)(3)	RSS-247 §5.4(4)	Maximum Peak Output Power	SPOT CHECK Note 2	PASS
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	Yes	PASS
15.247 (e)	RSS-247 §5.2(2)	Peak Power Spectral Density	Yes	PASS
15.203	RSS-Gen §8.3	Antenna Requirement	---	Compliance

Note: 1. The uncertainties value is not used in determining the result.
2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N grant on 11/29 2019 and IC: 2703H-159Z0N approved on 12/04/2019. According to KDB 484596 D01, we did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do, 451-713, Korea
Manufacturer	LG Electronics Inc. 222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do, 451-713, Korea
Factory #1	LG Electronics Nanjing New Technology Co., Ltd. No.346,Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Factory #2	SEO HEUNG ELECTRONICS CO LTD 55 Asan valley Seo-ro, Dunpo-myeon, Asan-si, Chungcheongnam-do, 31409 Korea
Product	Notebook Computer The product has two colors (Dark Silver and White).
Model	15Z995
Brand	LG

3.2. Description of EUT

Test Model	15Z995																												
Serial Number	N/A																												
Power Rating	DC 19V, 2.53A																												
RF Features	WLAN:802.11 a/b/g/n/ac/ax Bluetooth: BT and BLE (BT 5.0)																												
Transmit Type	<table border="1"> <thead> <tr> <th colspan="2">2.4 GHz</th> </tr> </thead> <tbody> <tr> <td>802.11b</td> <td>1T1R</td> </tr> <tr> <td>802.11g</td> <td>1T1R</td> </tr> <tr> <td>802.11n-HT20</td> <td>2T2R</td> </tr> <tr> <td>802.11n-HT40</td> <td>2T2R</td> </tr> <tr> <td>802.11ax-HE20</td> <td>2T2R</td> </tr> <tr> <td>802.11ax-HE40</td> <td>2T2R</td> </tr> <tr> <td>BT/BLE</td> <td>1T1R</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">UNII Bands</th> </tr> </thead> <tbody> <tr> <td>802.11a</td> <td>1T1R</td> </tr> <tr> <td>802.11n-HT20/802.11ac-VHT20/802.11ax-HE20</td> <td>2T2R</td> </tr> <tr> <td>802.11n-HT40/802.11ac-VHT40/802.11ax-HE40</td> <td>2T2R</td> </tr> <tr> <td>802.11ac-VHT80/802.11ax-HE80</td> <td>2T2R</td> </tr> <tr> <td>802.11ac-VHT160/802.11ax-HE160</td> <td>2T2R</td> </tr> </tbody> </table>	2.4 GHz		802.11b	1T1R	802.11g	1T1R	802.11n-HT20	2T2R	802.11n-HT40	2T2R	802.11ax-HE20	2T2R	802.11ax-HE40	2T2R	BT/BLE	1T1R	UNII Bands		802.11a	1T1R	802.11n-HT20/802.11ac-VHT20/802.11ax-HE20	2T2R	802.11n-HT40/802.11ac-VHT40/802.11ax-HE40	2T2R	802.11ac-VHT80/802.11ax-HE80	2T2R	802.11ac-VHT160/802.11ax-HE160	2T2R
2.4 GHz																													
802.11b	1T1R																												
802.11g	1T1R																												
802.11n-HT20	2T2R																												
802.11n-HT40	2T2R																												
802.11ax-HE20	2T2R																												
802.11ax-HE40	2T2R																												
BT/BLE	1T1R																												
UNII Bands																													
802.11a	1T1R																												
802.11n-HT20/802.11ac-VHT20/802.11ax-HE20	2T2R																												
802.11n-HT40/802.11ac-VHT40/802.11ax-HE40	2T2R																												
802.11ac-VHT80/802.11ax-HE80	2T2R																												
802.11ac-VHT160/802.11ax-HE160	2T2R																												
Software Version	N/A																												
Sample Status	Mass production																												
Date of Receipt	2019. 12. 16																												
Date of Test	2019. 12. 25 ~ 30																												
Interface Ports of EUT	<ul style="list-style-type: none"> • One Micro SD Card Slot • One Earphone Port • Three USB 3.0 Ports • One USB Type C Port • One HDMI Port • One DC Input Port 																												
Accessories Supplied	<ul style="list-style-type: none"> • AC Adapter • LAN Gender 																												

3.3. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	15Z980 ANTENNA ASM (Main)	LUXSHARE-ICT	PIFA	2400-2500	-1.21
				5150-5350	-2.1
				5470-5725	-1.3
				5725-5850	-1.1
2	15Z980 ANTENNA ASM (AUX)	LUXSHARE-ICT	PIFA	2400-2500	-0.8
				5150-5350	-2.8
				5470-5725	-2.0
				5725-5850	-3.5

3.4. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
802.11b	2412-2472	13	DSSS (DBPSK/DQPSK/CCK)	Up to 11
802.11g		13	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20				Up to 144.4
802.11n-HT40	2422-2462	9	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 300
802.11ax-HE20	2412-2472	13	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM)	Up to 287
802.11ax-HE40	2422-2462	9		Up to 574
BLE	2402-2480	40	GFSK (1M, 2M, PHY Coded S8, PHY Coded S2)	2

Channel List			
802.11 b/g/n-HT20/ax-HE20		802.11 n-HT40/ax-HE40	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	10	2457
9	2452	11	2462
10	2457	---	
11	2462		
12	2467		
13	2472		

Channel List							
BLE							
Channel Number	Frequency (MHz)						
37	2402	09	2422	18	2442	28	2462
00	2404	10	2424	19	2444	29	2464
01	2406	38	2426	20	2446	30	2466
02	2408	11	2428	21	2448	31	2468
03	2410	12	2430	22	2450	32	2470
04	2412	13	2432	23	2452	33	2472
05	2414	14	2434	24	2454	34	2474
06	2416	15	2436	25	2456	35	2476
07	2418	16	2438	26	2458	36	2478
08	2420	17	2440	27	2460	39	2480

RMS Output Power (dBm)						
Channel	802.11b	802.11g	802.11n- HT20	802.11ax- HE20	802.11n- HT40	802.11ax- HE40
1	19.35	16.91	17.13	17.03	---	---
2	19.96	17.94	18.43	18.26		
3	20.01	18.02	18.38	18.28	16.83	16.69
4	19.98	17.99	18.41	18.31	15.78	15.56
5	19.99	17.92	18.43	18.34	15.83	15.64
6	20.10	18.06	18.48	18.35	15.74	15.52
7	20.04	19.74	20.15	20.05	17.63	17.46
8	20.00	18.24	18.68	18.54	17.77	17.58
9	19.98	18.18	18.64	18.52	16.19	15.99
10	20.02	18.21	18.60	18.49	12.49	12.27
11	19.08	17.47	17.74	17.64	4.01	3.63
12	18.18	14.79	14.91	14.80	---	---
13	13.08	1.52	2.58	2.5		

3.5. Descriptions of Key Components

3.5.1. For the All Component Lists

Item	Supplier	Model / Type	Character	
System	Microsoft	Win10 Home	---	
	Microsoft	Win10 Pro	---	
Main Board	LG	14_15Z990/995 Main B/D	Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited	
SUB Board	LG	15Z990 WLAN SUB B/D	Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited	
CPU (Socket:FCBGA1528)	Intel	i5-10210U	1.6GHz, up to 4.2GHz	
		i7-10510U	1.8GHz, up to 4.9GHz	
15.6" LCD Panel	LG Display	LP156WFA(SP)(G1)	Resolution: 1920 x 1080, 60Hz FHD IPS (Touch)	
	LG Display	LP156WFC(SP)(Y1)	Resolution: 1920 x 1080, 60Hz FHD IPS (Normal Non touch)	
Storage (SSD)	Samsung	MZ-VLB2560	256GB	
	Samsung	MZ-VLB512B	512GB	
Memory (RAM)	Samsung	-	8GB DDR4	
	SK hynix	-	8GB DDR4	
	Samsung	-	8GB DDR4 SODIMM (On Card)	
Battery Pack	LG	LBS1224E	72Wh, DC7.7V, 9450mAh	
WLAN Combo Card	Intel	AX201D2W	WLAN and BT, 2x2 CNVi 1216 FCC ID: PD9AX201NG IC: 1000M-AX201NG	
WLAN Combo Antenna	LG (LUXSHARE-ICT)	15Z980 ANTENNA ASM	PIFA Type Main: Black, Aux: Gray	
Keyboard	LG	SN3870BL	15Z980 Black KBD	
		SN3870BL1	15Z980 White KBD	
Web Camera	Chicony	CKFIH2821005290LH	With two microphones	
		CKFIH28-121005290LH	With One microphone	
	Luxvisions	7BF109N2DC	With two microphones	
		7BF109N2DD	With One microphone	
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100 Megabit Ethernet	
		80-5946-101	(Black) 10/100 Megabit Ethernet	
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100Megabit Ethernet	
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet	
	Type C to LAN: Shielded, Undetached, 0.12m			
	SUZHOU MEC ELECTRONICS	80-5946-200	(White) 10/100/1000 Megabit Ethernet	
80-5946-210		(Black) 10/100/1000 Megabit Ethernet		
Type C to LAN: Shielded, Undetached, 0.13m.				
AC Adapter (48W)	LG (HONOR)	ADS-48MS-19-2 19048E	I/P: AC 100-240V, 50-60Hz, 1.5A, O/P: DC 19V, 2.53A	
	DC Power Cord: Non-Shielded, Undetached, 1.5m AC Power Cord: Non-Shielded, Detached, 1.55m (2C)			

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.


3.5.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:



SKU	
Main Board	LG, 14_15Z990/995 Main B/D
SUB Board	LG, 15Z990 WLAN SUB B/D
CPU	Intel, i7-10510U
15.6" LCD Panel	LG Display, LP156WFA(SP)(G1) (Touch)
Storage (SSD)	Samsung, 256GB
Memory (RAM)	SK hynix, 8GB
	Samsung, 8GB (On Card)
Battery Pack	LG, LBS1224E
WLAN Combo Card	Intel, AX201D2W
WLAN Combo Antenna	LG (LUXSHARE-ICT), 15Z980 ANTENNA ASM
Keyboard	LG, SN3870BL1 (White KBD)
Web Camera	Chicony, CKFIH2821005290LH
Type C Link to LAN Gender	SUZHOU MEC ELECTRONICS, 80-5946-200 (White)
AC Adapter	LG (HONOR), ADS-48MS-19-2 19048E

3.6. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
802.11b	1.00	8.35	N/A
802.11g	0.98	2.079	N/A
802.11n-HT20	0.99	3.97	N/A
802.11n-HT40	0.99	3.96	N/A
802.11ax-HE20	0.99	3.95	N/A
802.11ax-HE40	0.98	3.93	N/A
BLE	---	0.390	---

Note: When duty cycle is less than 98% (0.98) that duty cycle factor $10\log(1/x)$ is needed to add in conducted test items measured in average detector.

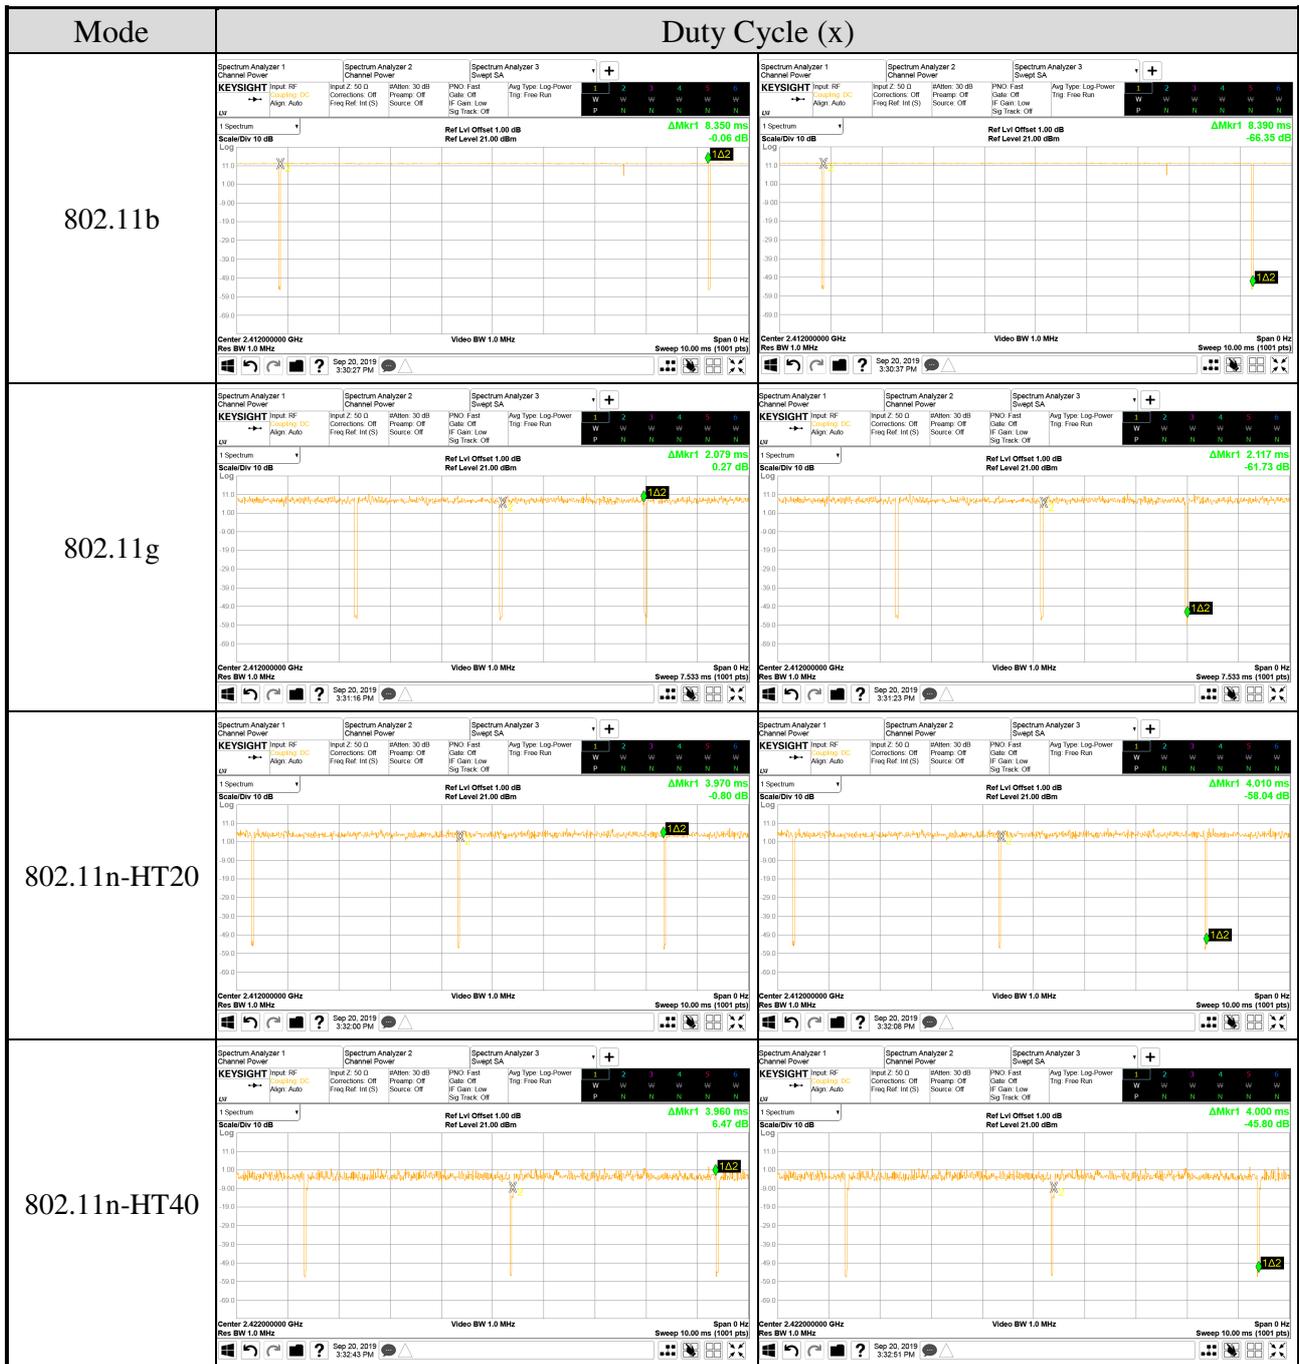

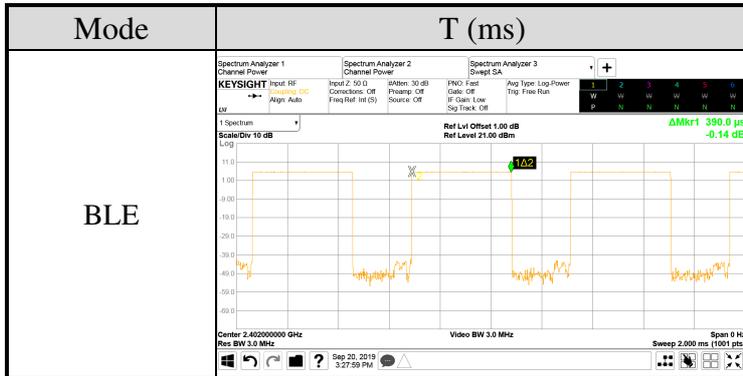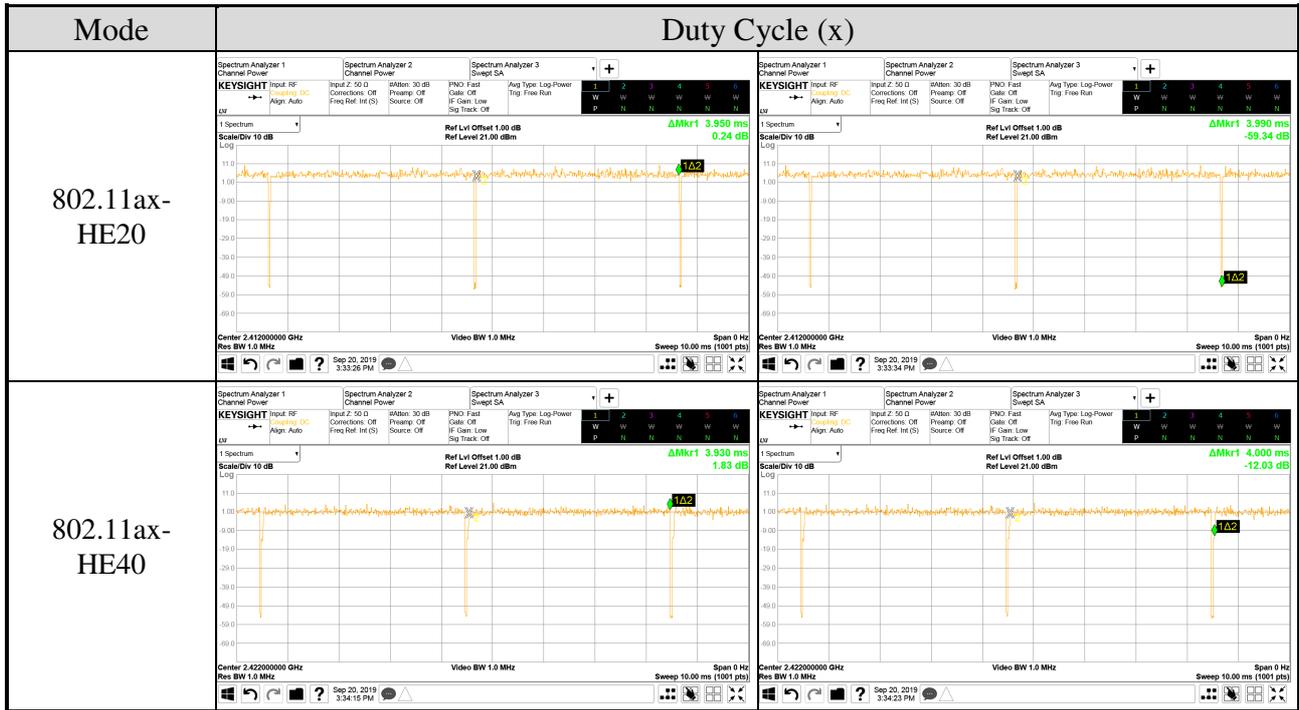

AC Conduction
Normal operation

Item	Mode	Data Rate	Test Channel	
Radiated Test Case	Radiated Band Edge ^{Note1}	802.11b	1Mbps	1/2/10/11/12/13
		802.11g	6Mbps	1/2/10/11/12/13
		802.11n-HT20	MCS8	1/2/10/11/12/13
		802.11n-HT40	MCS8	3/4/8/9/10/11
		802.11ax-HE20	HE0	1/2/10/11/12/13
		802.11ax-HE40	HE0	3/4/8/9/10/11
		BLE	1Mbps	37/39
	Radiated Spurious Emission ^{Note1 & 2}	802.11b	1Mbps	7
		802.11g	6Mbps	7
		802.11n-HT20	MCS8	7
		802.11n-HT40	MCS8	8
		802.11ax-HE20	HE0	7
		802.11ax-HE40	HE0	7
		BLE	1Mbps	37/17/39

Item	Mode	RU Config	Test Channel	
Radiated Test Case	Radiated Band Edge ^{Note1}	802.11ax-HE20	26/0	1
			52/37	
			106/53	
		802.11ax-HE20	26/8	13
			52/40	
			106/54	
		802.11ax-HE40	242/61	3
			242/62	11

Item	Mode	Data Rate	Test Channel	
Conducted Test Case	6dB/Occupied Bandwidth	802.11b	1Mbps	1/7/11/13
		802.11g	6Mbps	1/7/11/13
		802.11n-HT20	MCS8	1/7/11/13
		802.11n-HT40	MCS8	3/7/9/11
		802.11ax-HE20	HE0	1/7/11/13
		802.11ax-HE40	HE0	3/7/9/11
		BLE	1Mbps	37/17/39
	Peak Output Power	802.11b	1Mbps	1/2/7/10/11/12/13
		802.11g	6Mbps	1/2/7/10/11/12/13
		802.11n-HT20	MCS8	1/2/7/10/11/12/13
		802.11n-HT40	MCS8	3/4/7/8/9/10/11
		802.11ax-HE20	HE0	1/2/7/10/11/12/13
		802.11ax-HE40	HE0	3/4/7/8/9/10/11
		BLE	1Mbps	37/17/39
			2Mbps	37/17/39
	PHY Coded S2		37/17/39	
		PHY Coded S8	37/17/39	
	Band Edge	802.11b	1Mbps	1/11/13
		802.11g	6Mbps	1/11/13
		802.11n-HT20	MCS8	1/11/13
		802.11n-HT40	MCS8	3/9/11
		802.11ax-HE20	HE0	1/11/13
		802.11ax-HE40	HE0	3/9/11
		BLE	1Mbps	37/39
	Spurious Emission	802.11b	1Mbps	1/7/11/13
		802.11g	6Mbps	1/7/11/13
		802.11n-HT20	MCS8	1/7/11/13
		802.11n-HT40	MCS8	3/7/9/11
		802.11ax-HE20	HE0	1/7/11/13
		802.11ax-HE40	HE0	3/7/9/11
BLE		1Mbps	37/17/39	
Peak Power Spectral Density	802.11b	1Mbps	1/7/11/13	
	802.11g	6Mbps	1/7/11/13	
	802.11n-HT20	MCS8	1/7/11/13	
	802.11n-HT40	MCS8	3/7/9/11	
	802.11ax-HE20	HE0	1/7/11/13	
	802.11ax-HE40	HE0	3/7/9/11	
	BLE	1Mbps	37/17/39	

Item	Mode	RU Config	Test Channel	
Conducted Test Case	6dB/Occupied Bandwidth	802.11ax-HE20	26/0	1
			52/37	
			106/53	
			26/8	13
			52/40	
			106/54	
	802.11ax-HE40	242/61	3	
		242/62	11	
	Peak Output Power	802.11ax-HE20	26/0	1
			52/37	
			106/53	
			26/8	13
			52/40	
			106/54	
	802.11ax-HE40	242/61	3	
		242/62	11	
	Peak Power Spectral Density	802.11ax-HE20	26/0	1
			52/37	
106/53				
26/8			13	
52/40				
106/54				
802.11ax-HE40	242/61	3		
	242/62	11		

Note 1: Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: Lie Side Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

Note 3: The modulation and bandwidth are similar for 802.11n mode for HT20/HT40 and 802.11ac mode for VHT20/VHT40, therefore investigated worst case to representative mode in the test report.

Note 4: The data rates were selected based on preliminary testing that identified those rate as the worst case for output power.

3.7. Tested Supporting System List

3.7.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD Monitor	LG	22LK330-DB	N/A	N/A
2.	USB Mouse	ASUS	MOBTUO	N/A	FCC By DoC
3.	Earphone	APPLE	N/A	N/A	N/A

3.7.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8m
3.	Earphone Cable: Unshielded, Undetachable, 0.9m

3.8. Setup Configuration

3.8.1. EUT Configuration for Power Line & Radiated Emission

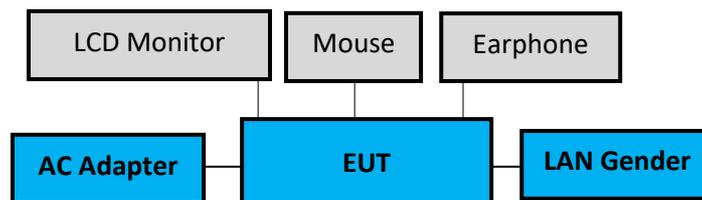

3.8.2. EUT Configuration for RF Conducted Test Items

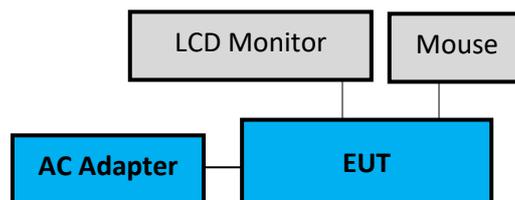

3.9. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT BT or WLAN function under continues transmitting and choosing data rate/ channel.

[Chain 0 is aux port (A Button in DRTU) Chain 1 is main port (B Button in DRTU)].

3.10. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber

3.11.Measurement Uncertainty

Test Items/Facilities		Frequency Range	Uncertainty
Conduction Test		9kHz-150kHz	±3.7dB
		150kHz-30MHz	±3.5dB
Radiation Test	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.1dB
		200MHz-1000MHz, 3m, Horizontal	±3.9dB
		30MHz-200MHz, 3m, Vertical	±4.2dB
		200MHz-1000MHz, 3m, Vertical	±4.1dB
		1GHz-6GHz, 3m	±4.2dB
		6GHz-18GHz, 3m	±4.6dB
	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
		200MHz-1000MHz, 3m, Horizontal	±3.9dB
		30MHz-200MHz, 3m, Vertical	±4.4dB
		200MHz-1000MHz, 3m, Vertical	±4.1dB
	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.3dB
		200MHz-1000MHz, 3m, Horizontal	±4.0dB
		30MHz-200MHz, 3m, Vertical	±4.3dB
		200MHz-1000MHz, 3m, Vertical	±4.4dB
		1GHz-6GHz, 3m	±4.5dB
		6GHz-18GHz, 3m	±4.6dB
	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.0dB
		200MHz-1000MHz, 3m, Horizontal	±3.9dB
		30MHz-200MHz, 3m, Vertical	±4.2dB
		200MHz-1000MHz, 3m, Vertical	±4.3dB
		1GHz-6GHz, 3m	±4.3dB
		6GHz-18GHz, 3m	±4.7dB
	Fully Anechoic Chamber	30MHz~1000MHz	±4.7dB
		1GHz~18GHz	±5.3dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2019. 01. 23	1 Year
2.	A.M.N.	R&S	ENV4200	100169	2019. 11. 13	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2019. 12. 10	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2019. 01. 12	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2019. 04. 20	1 Year
6.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2019. 01. 30	1 Year
2.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2019. 01. 17	1 Year
3.	Test Receiver	R & S	ESCS30	100338	2019. 06. 12	1 Year
4.	Amplifier	HP	8447D	2944A06305	2019. 01. 30	1 Year
5.	Amplifier	HP	8449B	3008A00529	2019. 01. 23	1 Year
6.	Amplifier	Keysight	83051A	MY53010042	2019. 08. 08	1 Year
7.	Bilog Antenna	TESEQ	CBL6112D	33821	2019. 01. 19	1 Year
8.	Loop Antenna	R&S	HFH2-Z2	891847/27	2019.12. 16	2 Years
9	Double-Ridged Waveguide Horn	EMCO	3115	9609-4927	2019. 06. 24	1 Year
10.	Horn Antenna	COM-POWER	AH-840	101092	2019. 05. 14	1 Year
11.	2.4GHz Notch Filter	K&L	7NSL10-244 1.5/E130.5-O /O	1	2019. 07. 24	1 Year
12.	3GHz Notch Filter	Microwave	H3G018G1	484796	2019. 08. 21	1 Year
13.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2019. 02. 01	1 Year
14.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	54602/6	2019. 02. 01	1 Year
15.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	MY1493/2	2019. 02. 01	1 Year
16.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	MY1495/2	2019. 02. 01	1 Year
17.	Digital Thermo-Hygro Meter	IMax	HTC-1	No.1 3m A/C	2019. 04. 20	1 Year
18.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2019. 01. 17	1 Year
2.	Power Meter	Anritsu	ML2495A	1145008	2019. 11. 06	1 Year
3.	Power Sensor	Anritsu	MA2411B	1126096	2019. 11. 06	1 Year
4.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2019. 04. 20	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.8

5.1.2. Shielded Room Setup Diagram

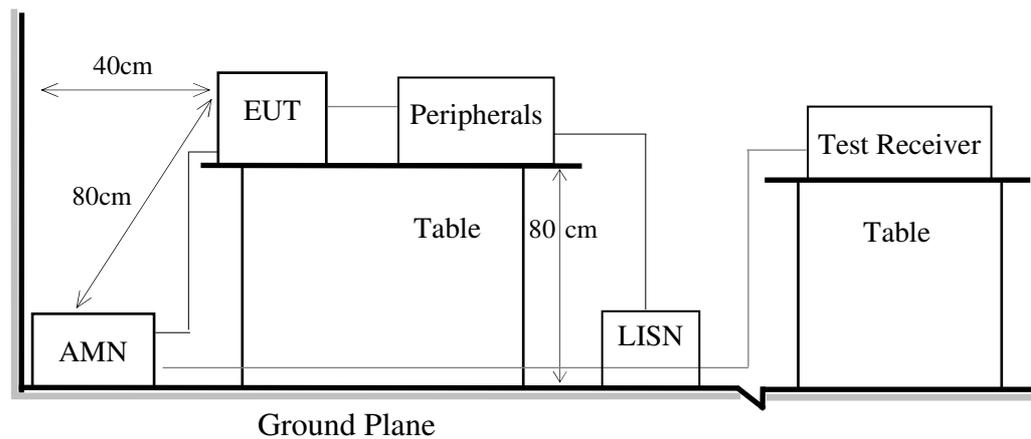

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.8


6.1.2. Setup Diagram for 9kHz-30MHz

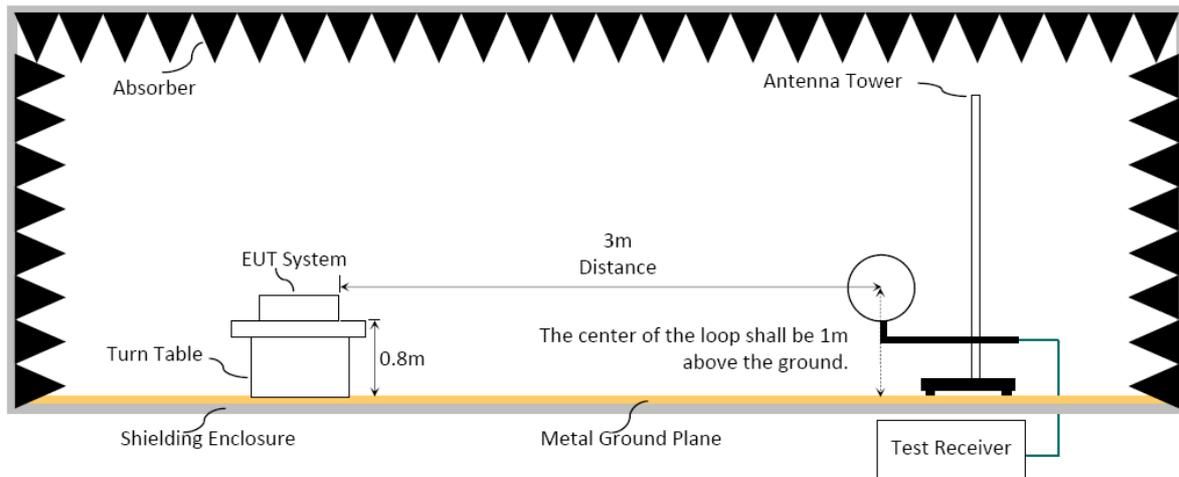

6.1.3. Setup Diagram for 30-1000 MHz

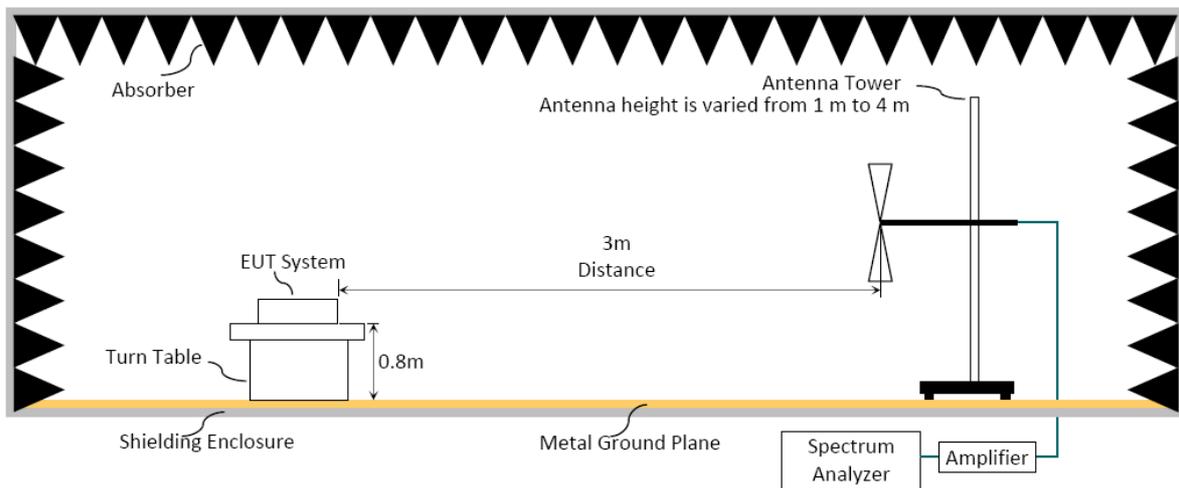

6.1.4. Setup Diagram for above 1GHz

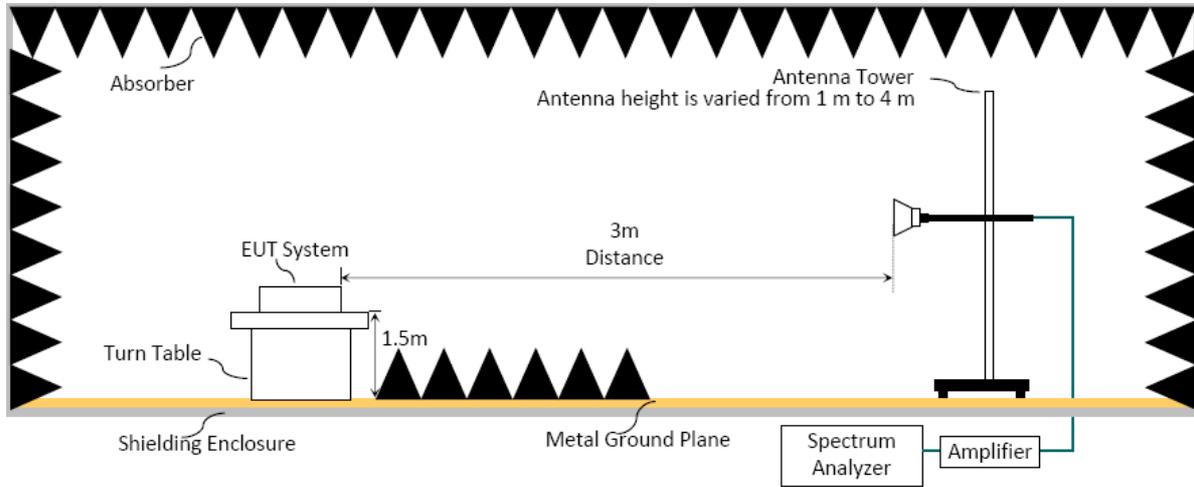

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic (up to 25 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:

Option 1:

- (1) RBW = 1MHz
- (2) VBW $\geq 1/T$.

Modulation Type	T (ms)	1/ T (kHz)	VBW Setting (Hz)
BLE	0.90	1.111111	10Hz
802.11b	8.35	0.119760	10Hz
802.11g	2.079	0.481000	10Hz
802.11n-HT20	3.97	0.251889	10Hz
802.11n-HT40	3.96	0.252525	10Hz
802.11ax-HE20	3.95	0.253165	10Hz
802.11ax-HE40	3.93	0.254453	10Hz

N/A: 1/ T is not implemented when duty cycle presented in section 3.6 is $\geq 98\%$.

- (1) Detector = Peak.
- (2) Sweep time = auto.
- (3) Trace mode = max hold.
- (4) Allow sweeps to continue until the trace stabilizes.

Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation


- Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)
- Average Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)
- Average Emission Level = Peak Emission Level + DCCF
 Duty Cycle Correction Factor (DCCF) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.7
- ERP = Peak Emission Level - 95.2dB - 2.14dB

6.5. Test Results

Please refer to Appendix A.

7. 6dB/OCCUPIED BANDWIDTH

7.1. Block Diagram of Test Setup

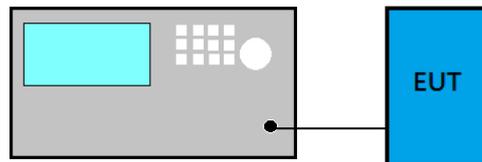

7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x to -6dB or 99% power to record the final bandwidth.


7.4. Test Results

Please refer to Appendix A


8. MAXIMUM PEAK OUTPUT POWER

8.1. Block Diagram of Test Setup

- For WLAN Function

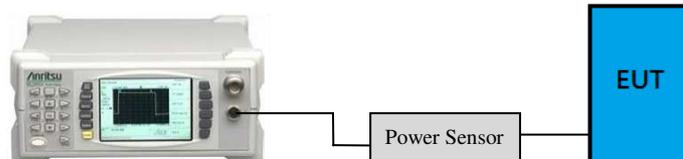

- For BLE Function

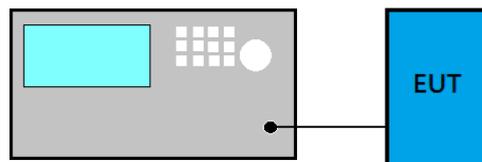

8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ PKPM1 Peak power meter method:

EUT is connected to power sensor and record the maximum output power.

■ Maximum peak conducted output power method:

- (1) Set the RBW \geq DTS bandwidth
- (2) Set VBW $\geq 3 \times$ RBW
- (3) Set span $\geq 3 \times$ RBW.
- (4) Sweep time = auto couple
- (5) Detector = peak.
- (6) Trace mode = max hold.
- (7) Allow trace to fully stabilize.
- (8) Use peak marker function to determine the peak amplitude level.

■ Method AVGPM (Measurement using an RF average power meter):

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.

□ Method AVGSA-2 (Spectrum channel power)


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.

8.4. Test Results

Please refer to Appendix A

9. EMISSION LIMITATIONS

9.1. Block Diagram of Test Setup

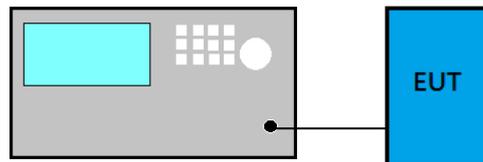

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

■ Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

9.4. Test Results

Please refer to Appendix A

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

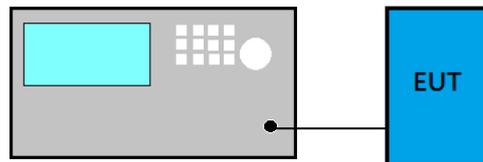

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

□ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.7 < 98%.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Please refer to Appendix A

11.DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX A

TEST DATA AND PLOTS


(Model: 15Z995)

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	98
A.2.3 Emissions in Non-restricted Frequency Bands:.....	100
A.3 6dB/OCCUPIED BANDWIDTH	101
A.3.1 Emission Bandwidth Result.....	101
A.3.2 Measurement Plots	103
A.4 MAXIMUM PEAK OUTPUT POWER	109
A.4.1 Peak Output Power	109
A.4.2 Average Output Power (Reporting only).....	118
A.4.3 Measurement Plots	126
A.5 EMISSION LIMITATIONS	128
A.6 POWER SPECTRAL DENSITY	155
A.6.1 Power Spectral Density Result	155
A.6.2 Measurement Plots	157

A.1 CONDUCTED EMISSION

Test Date	2019/12/30	Temp./Hum.	25°C/59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

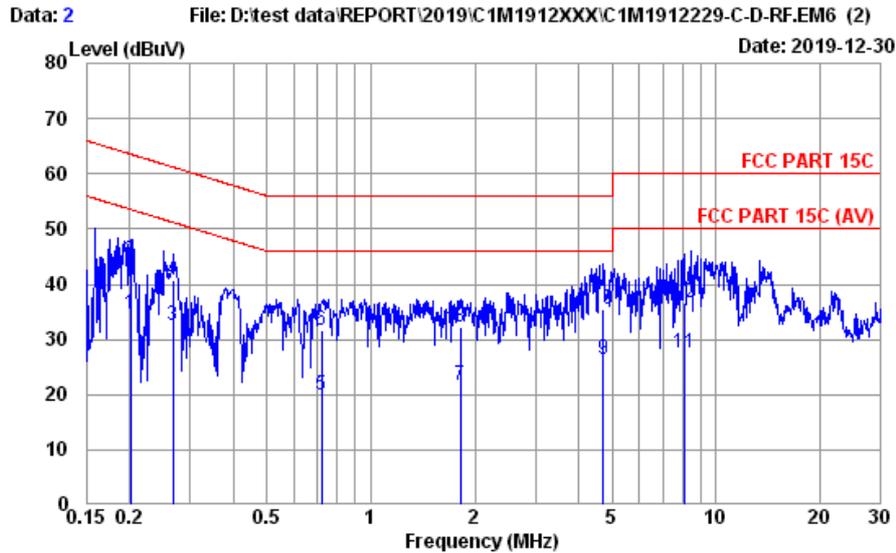


Site no. : No.8 Shielded Room Data no. : 2
 Condition : ENV4200 (169) (A) LISN Phase : NEUTRAL
 Limit : FCC PART 15C
 Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
 EUT : 15Z995
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

	ISN.	Cable	Pulse	Emission		Limits	Margin	Remark	
	Freq.	Factor	Loss	Att.	Reading	Level			
	(MHz)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dBμV)	(dB)	
1	0.202	10.65	0.04	9.86	14.07	34.62	53.54	18.92	Average
2	0.202	10.65	0.04	9.86	23.64	44.19	63.54	19.35	QP
3	0.267	10.60	0.04	9.86	11.89	32.39	51.20	18.81	Average
4	0.267	10.60	0.04	9.86	20.27	40.77	61.20	20.43	QP
5	0.720	10.51	0.05	9.86	-0.39	20.03	46.00	25.97	Average
6	0.720	10.51	0.05	9.86	11.25	31.67	56.00	24.33	QP
7	1.819	10.53	0.07	9.86	1.09	21.55	46.00	24.45	Average
8	1.819	10.53	0.07	9.86	11.73	32.19	56.00	23.81	QP
9	4.721	10.81	0.10	9.87	5.72	26.50	46.00	19.50	Average
10	4.721	10.81	0.10	9.87	14.68	35.46	56.00	20.54	QP
11	8.062	11.25	0.13	9.88	6.41	27.67	50.00	22.33	Average
12	8.062	11.25	0.13	9.88	15.44	36.70	60.00	23.30	QP

Remarks: 1. Emission Level= ISN. Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2019/12/30	Temp./Hum.	25°C/59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

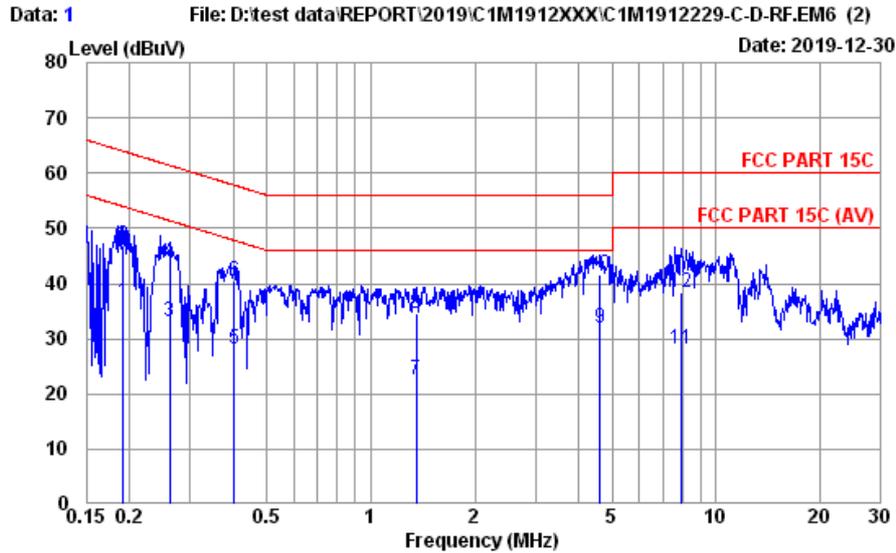

Site no. : No.8 Shielded Room Data no. : 1
 Condition : ENV4200 (169) (A) LISN Phase : LINE
 Limit : FCC PART 15C
 Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
 EUT : 15Z995
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

	ISN. Factor	Cable Loss	Pulse Att.	Emission Reading	Emission Level	Limits	Margin	Remark
12	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dBμV)	(dB)	
1	10.62	0.04	9.86	16.13	36.65	53.98	17.33	Average
2	10.62	0.04	9.86	26.50	47.02	63.98	16.96	QP
3	10.56	0.04	9.86	12.70	33.16	51.38	18.22	Average
4	10.56	0.04	9.86	23.55	44.01	61.38	17.37	QP
5	10.49	0.04	9.86	7.74	28.13	47.81	19.68	Average
6	10.49	0.04	9.86	19.99	40.38	57.81	17.43	QP
7	10.49	0.06	9.86	2.12	22.53	46.00	23.47	Average
8	10.49	0.06	9.86	14.13	34.54	56.00	21.46	QP
9	10.70	0.10	9.87	11.20	31.87	46.00	14.13	Average
10	10.70	0.10	9.87	20.91	41.58	56.00	14.42	QP
11	11.06	0.13	9.88	6.97	28.04	50.00	21.96	Average
12	11.06	0.13	9.88	17.45	38.52	60.00	21.48	QP

Remarks: 1. Emission Level= ISN. Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2019/12/25 ~ 26	Temp./Hum.	22°C/50 ~ 58%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Sean Wang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
48.43	15.45	1.54	8.22	25.21	40.00	14.79	Peak
93.05	16.05	2.20	6.55	24.80	43.50	18.70	Peak
236.61	18.18	3.81	8.61	30.60	46.00	15.40	Peak
335.55	20.76	4.99	4.60	30.35	46.00	15.65	Peak
572.23	24.50	6.85	3.18	34.53	46.00	11.47	Peak
949.56	27.69	8.75	1.57	38.01	46.00	7.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
30.97	25.03	1.21	9.39	35.63	40.00	4.37	Peak
52.31	14.20	1.60	21.97	37.77	40.00	2.23	Peak
94.99	16.45	2.23	9.79	28.47	43.50	15.03	Peak
179.38	15.43	3.22	11.42	30.07	43.50	13.43	Peak
491.72	23.62	6.68	3.98	34.28	46.00	11.72	Peak
999.03	28.07	9.03	2.96	40.06	54.00	13.94	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
47.46	15.90	1.52	7.99	25.41	40.00	14.59	Peak
93.05	16.05	2.20	6.14	24.39	43.50	19.11	Peak
141.55	17.49	2.79	4.36	24.64	43.50	18.86	Peak
258.92	18.99	4.03	6.54	29.56	46.00	16.44	Peak
335.55	20.76	4.99	4.29	30.04	46.00	15.96	Peak
953.44	27.72	8.77	1.87	38.36	46.00	7.64	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	25.03	1.21	8.15	34.39	40.00	5.61	Peak
53.28	13.98	1.62	20.84	36.44	40.00	3.56	Peak
95.96	16.65	2.24	9.26	28.15	43.50	15.35	Peak
177.44	15.53	3.20	12.98	31.71	43.50	11.79	Peak
405.39	22.48	5.92	6.26	34.66	46.00	11.34	Peak
996.12	28.04	9.02	7.57	44.63	54.00	9.37	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

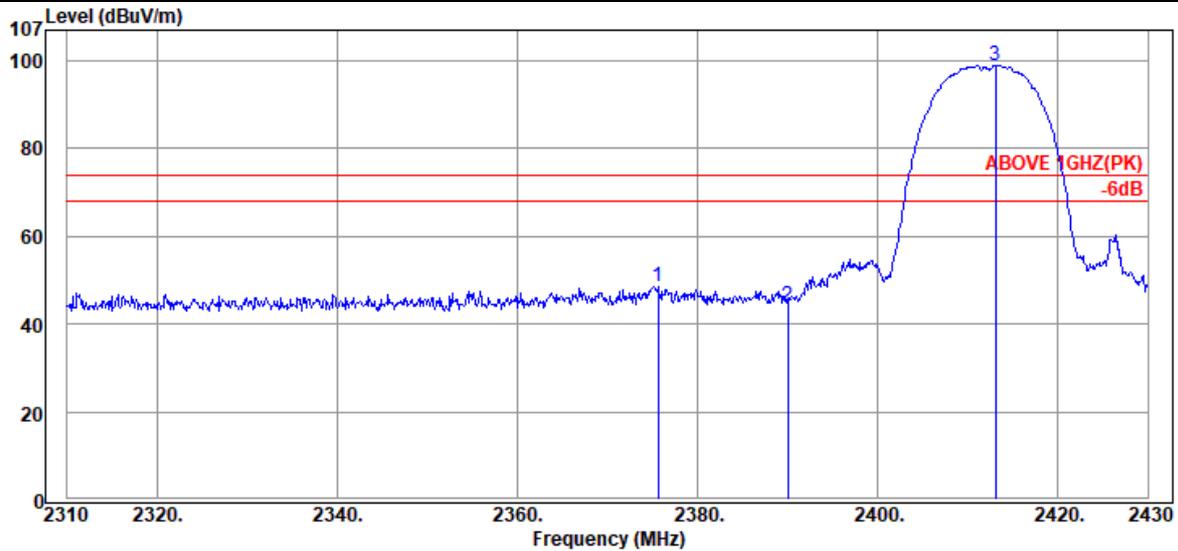

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.64	28.21	6.01	14.22	48.44	74.00	25.56	Peak
2390.04	28.32	6.03	9.78	44.13	74.00	29.87	Peak
@ 2413.08	28.43	6.05	64.53	99.01	---	---	Peak

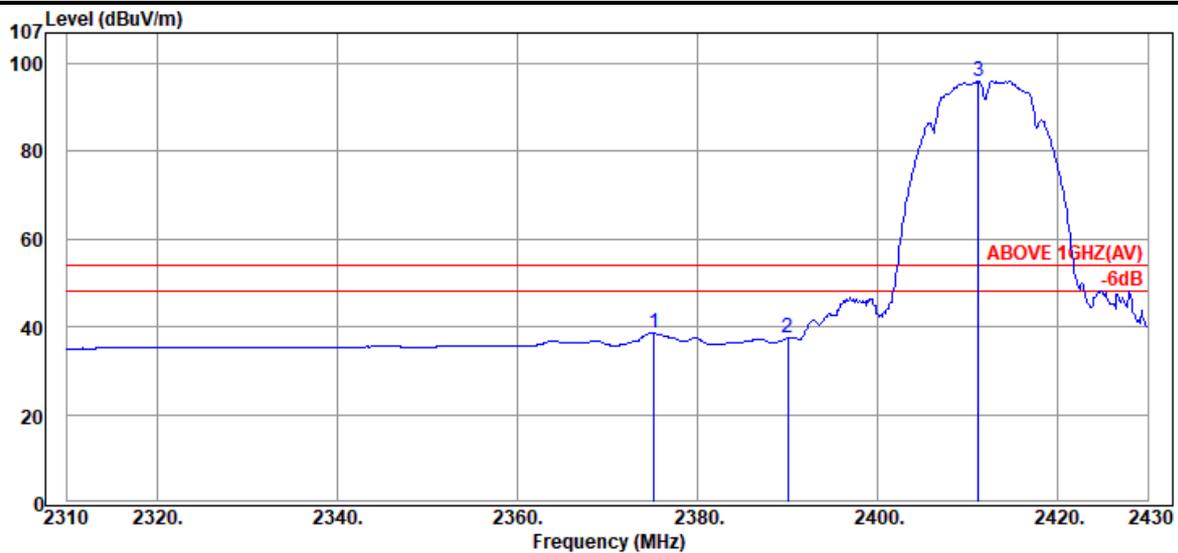

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.16	28.20	6.01	4.37	38.58	54.00	15.42	Average
2390.04	28.32	6.03	3.14	37.49	54.00	16.51	Average
@ 2411.16	28.42	6.05	61.54	96.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

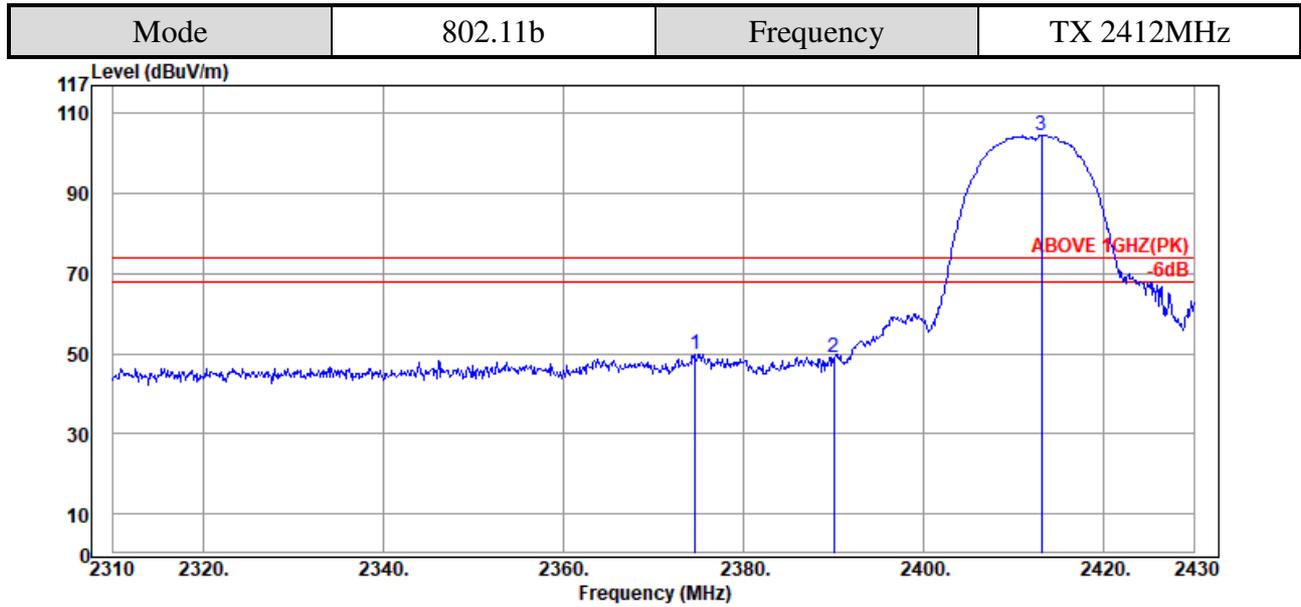

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.68	28.20	6.01	15.70	49.91	74.00	24.09	Peak
2390.04	28.32	6.03	14.83	49.18	74.00	24.82	Peak
@ 2413.08	28.43	6.05	70.07	104.55	---	---	Peak

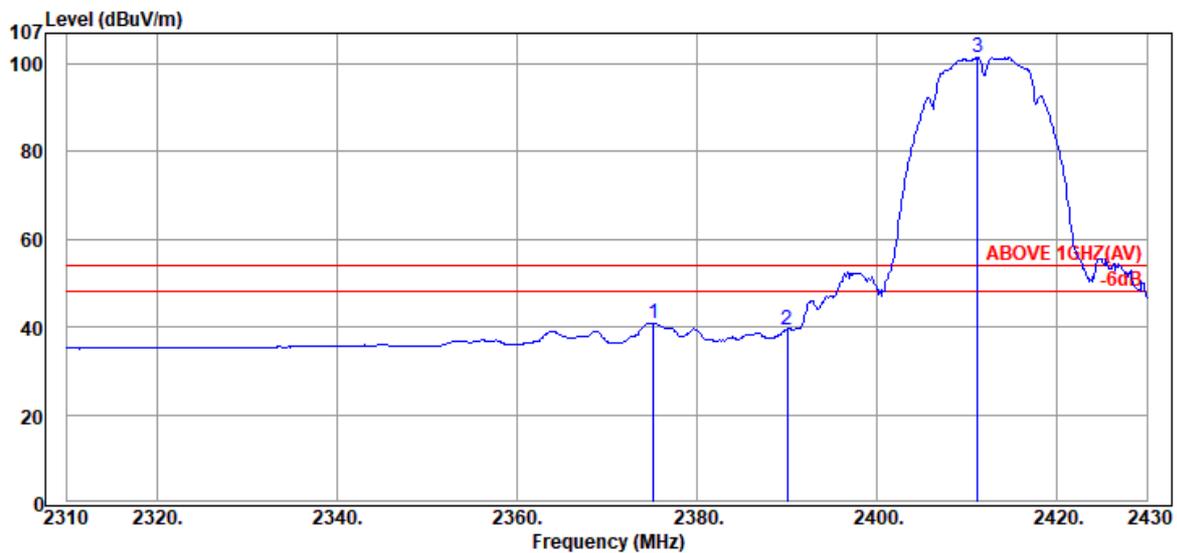


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.16	28.20	6.01	6.75	40.96	54.00	13.04	Average
2390.04	28.32	6.03	4.93	39.28	54.00	14.72	Average
@ 2411.16	28.42	6.05	67.04	101.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

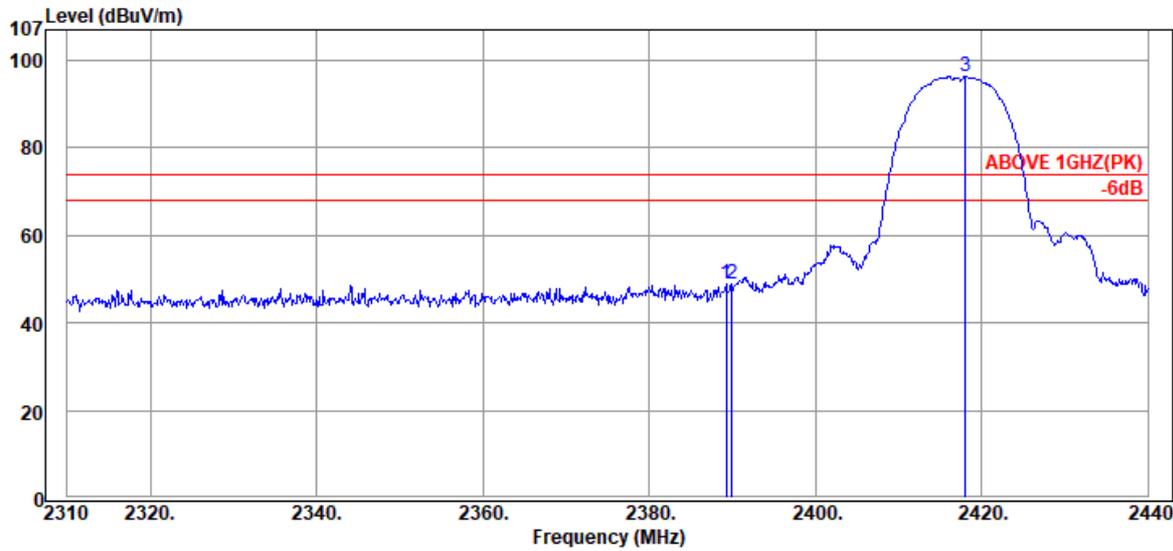

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.30	28.31	6.02	14.72	49.05	74.00	24.95	Peak
2389.95	28.32	6.02	14.38	48.72	74.00	25.28	Peak
@ 2418.03	28.44	6.06	61.93	96.43	---	---	Peak

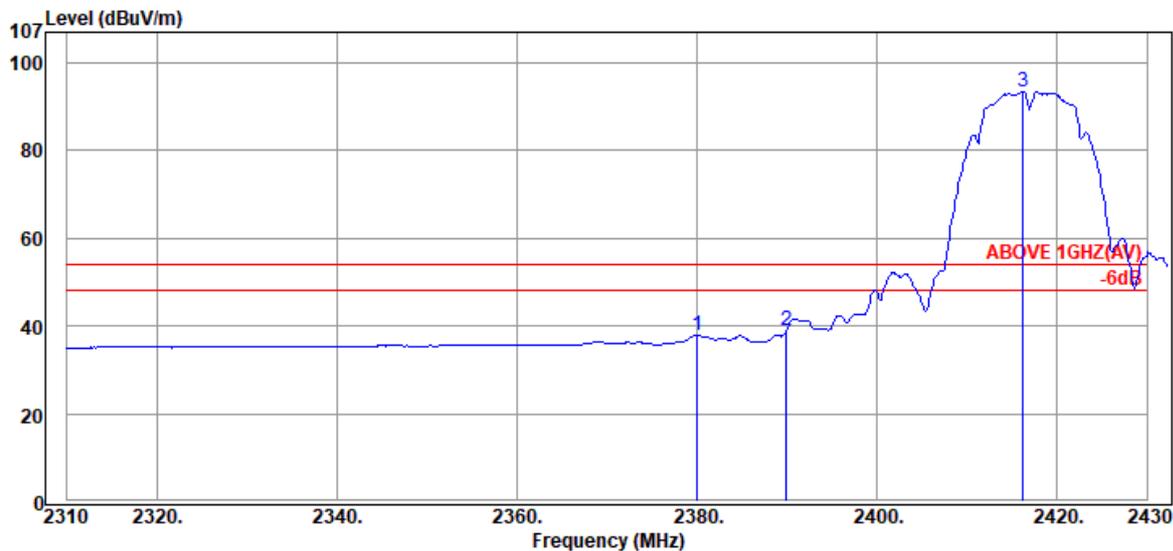

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.07	28.24	6.01	3.65	37.90	54.00	16.10	Average
2389.95	28.32	6.02	4.62	38.96	54.00	15.04	Average
@ 2416.21	28.43	6.06	59.03	93.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

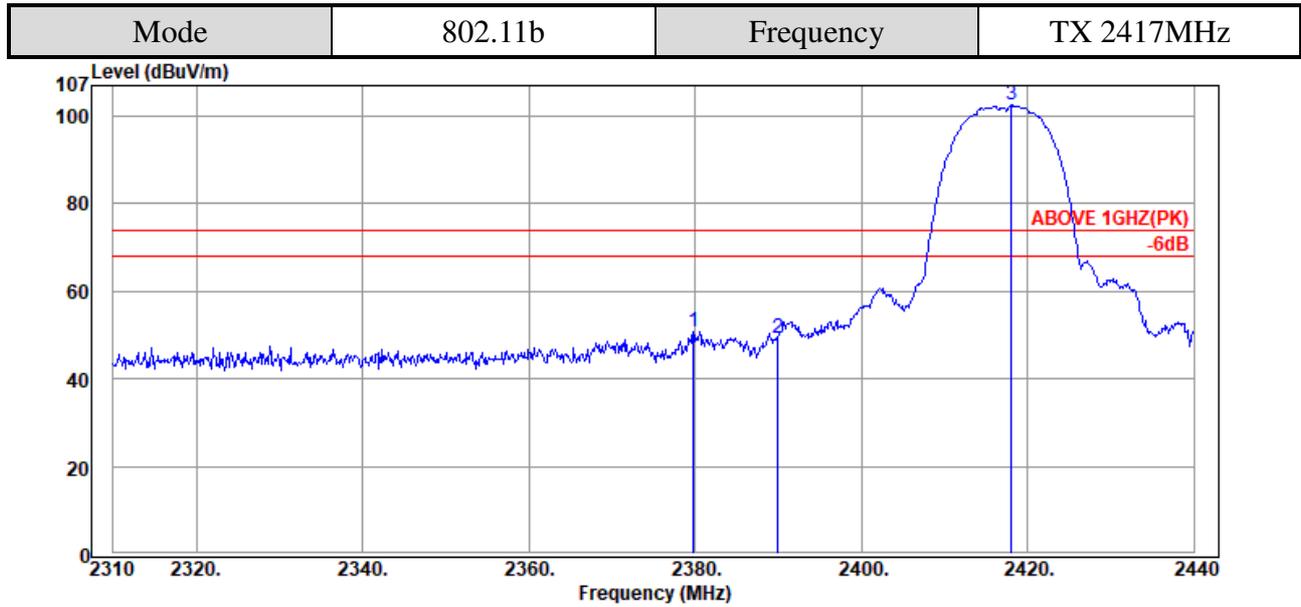

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.81	28.24	6.01	16.43	50.68	74.00	23.32	Peak
2389.95	28.32	6.02	15.03	49.37	74.00	24.63	Peak
@ 2418.03	28.44	6.06	67.96	102.46	---	---	Peak

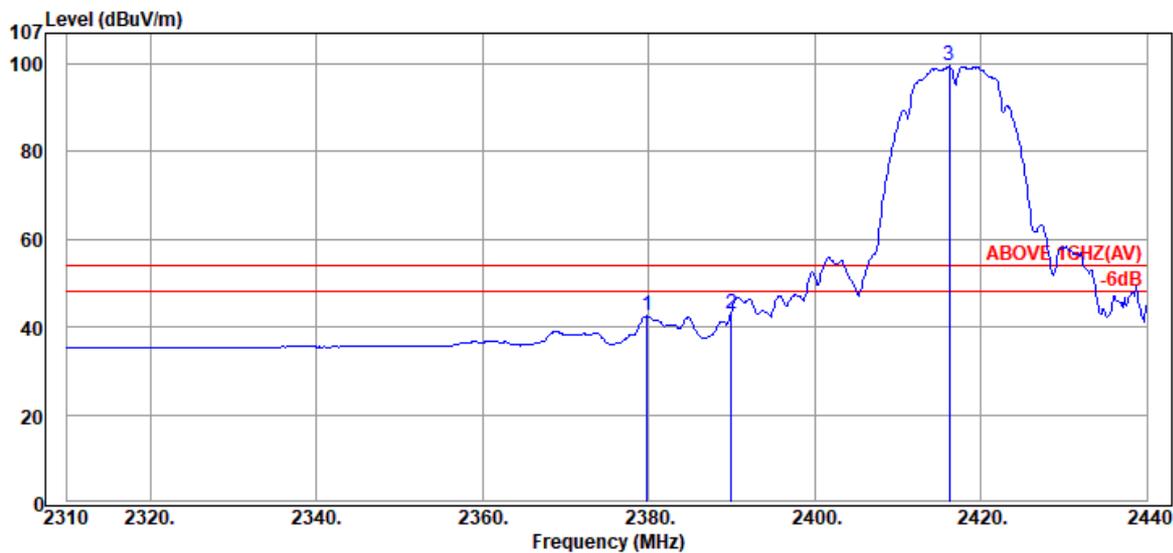

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.81	28.24	6.01	8.25	42.50	54.00	11.50	Average
2389.95	28.32	6.02	8.85	43.19	54.00	10.81	Average
@ 2416.21	28.43	6.06	64.99	99.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

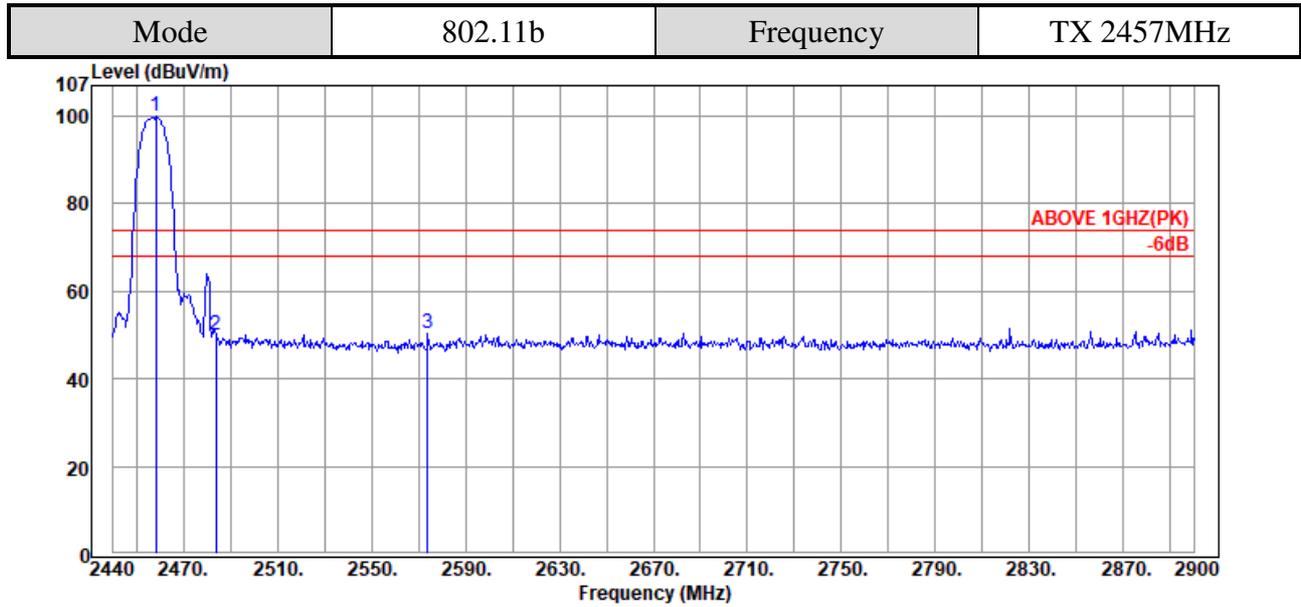

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.40	28.55	6.10	65.27	99.92	---	---	Peak
2483.70	28.70	6.13	15.15	49.98	74.00	24.02	Peak
2573.86	29.00	6.25	15.08	50.33	74.00	23.67	Peak

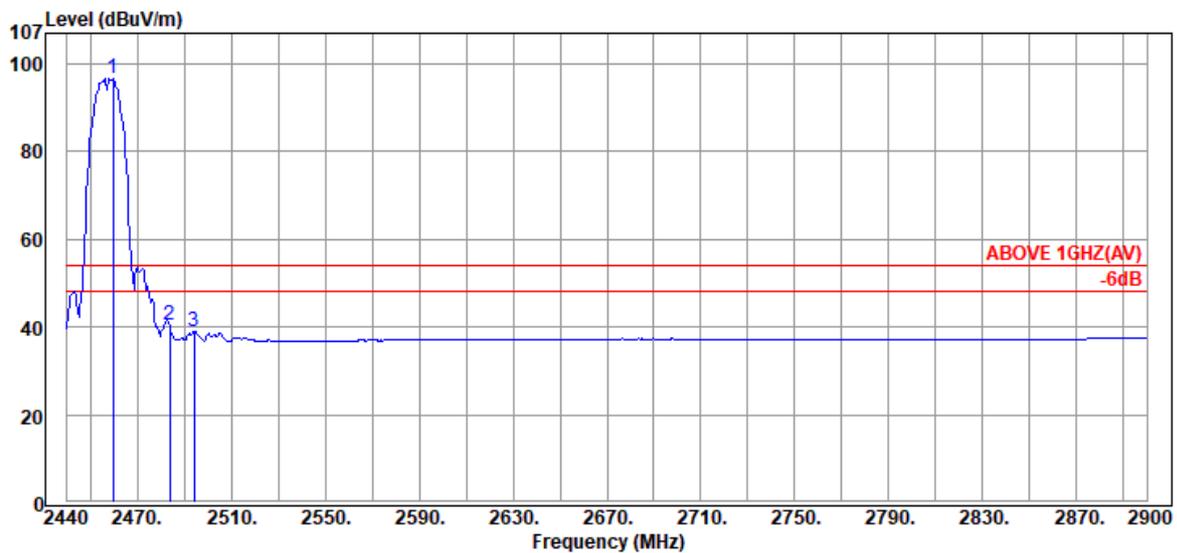


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.78	28.56	6.10	61.89	96.55	---	---	Average
2483.70	28.70	6.13	5.79	40.62	54.00	13.38	Average
2494.28	28.77	6.14	4.24	39.15	54.00	14.85	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

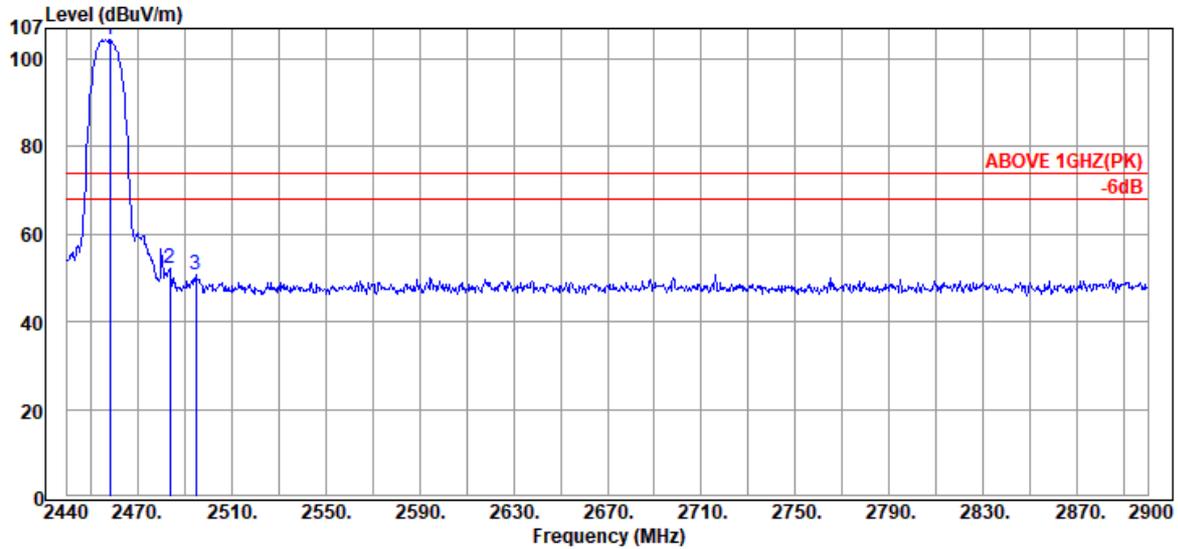

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.40	28.55	6.10	69.72	104.37	---	---	Peak
2483.70	28.70	6.13	17.28	52.11	74.00	21.89	Peak
2494.74	28.77	6.14	15.85	50.76	74.00	23.24	Peak

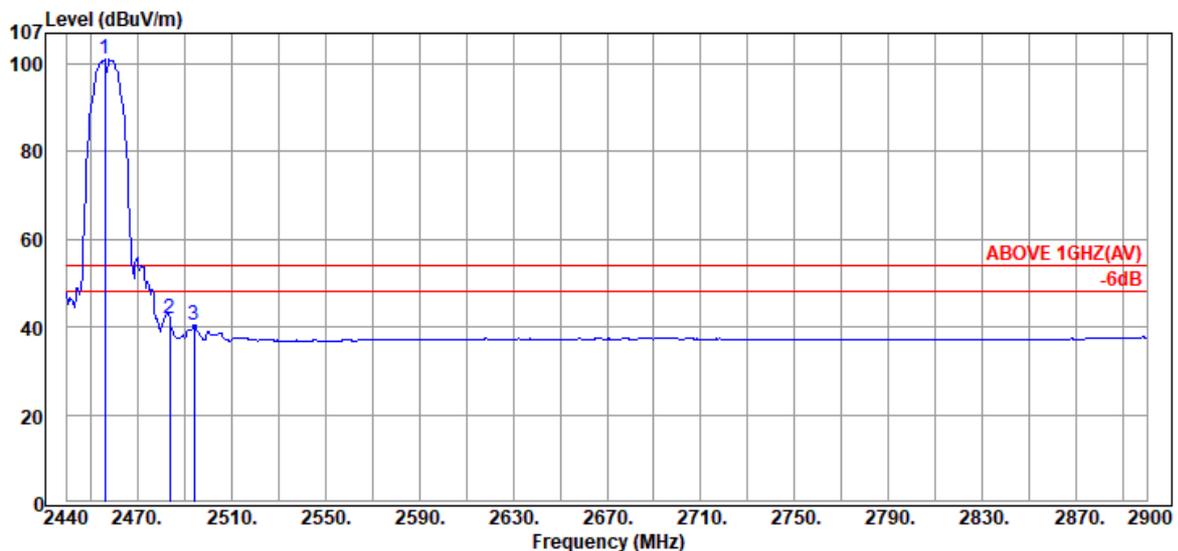


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.10	28.54	6.10	66.45	101.09	---	---	Average
2483.70	28.70	6.13	7.16	41.99	54.00	12.01	Average
2494.28	28.77	6.14	5.63	40.54	54.00	13.46	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

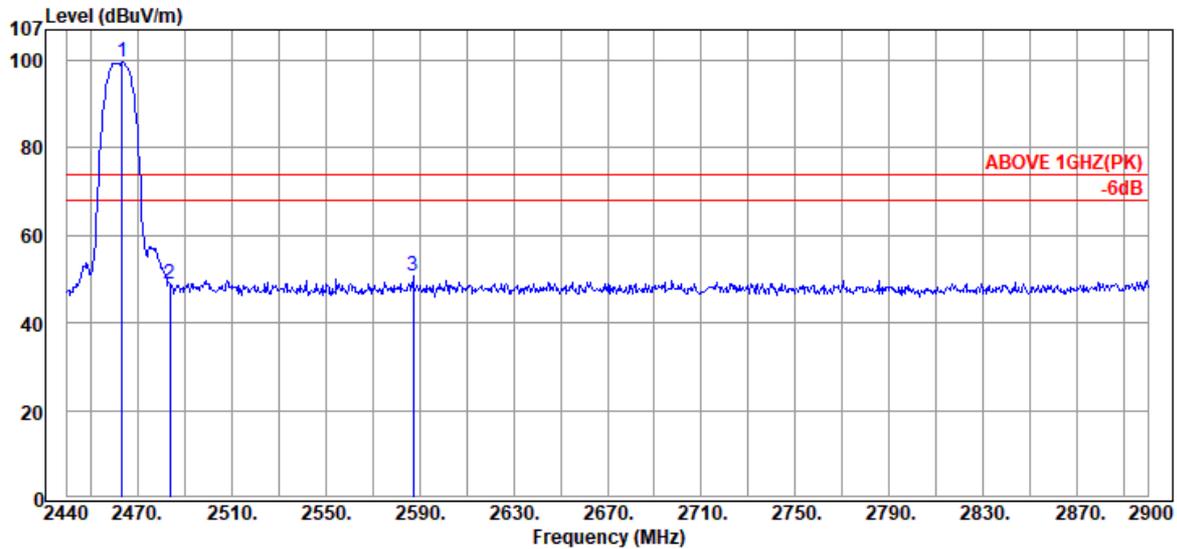

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.46	28.58	6.11	65.06	99.75	---	---	Peak
2483.70	28.70	6.13	14.10	48.93	74.00	25.07	Peak
2587.20	29.05	6.26	15.56	50.87	74.00	23.13	Peak

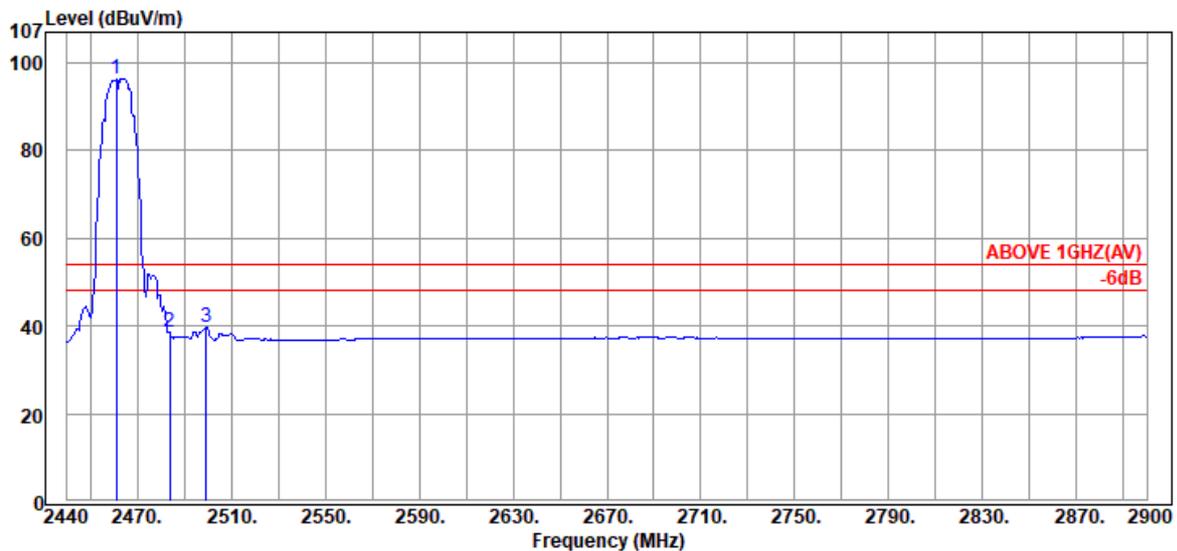

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.16	28.57	6.11	61.77	96.45	---	---	Average
2483.70	28.70	6.13	3.80	38.63	54.00	15.37	Average
2499.34	28.80	6.15	4.67	39.62	54.00	14.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

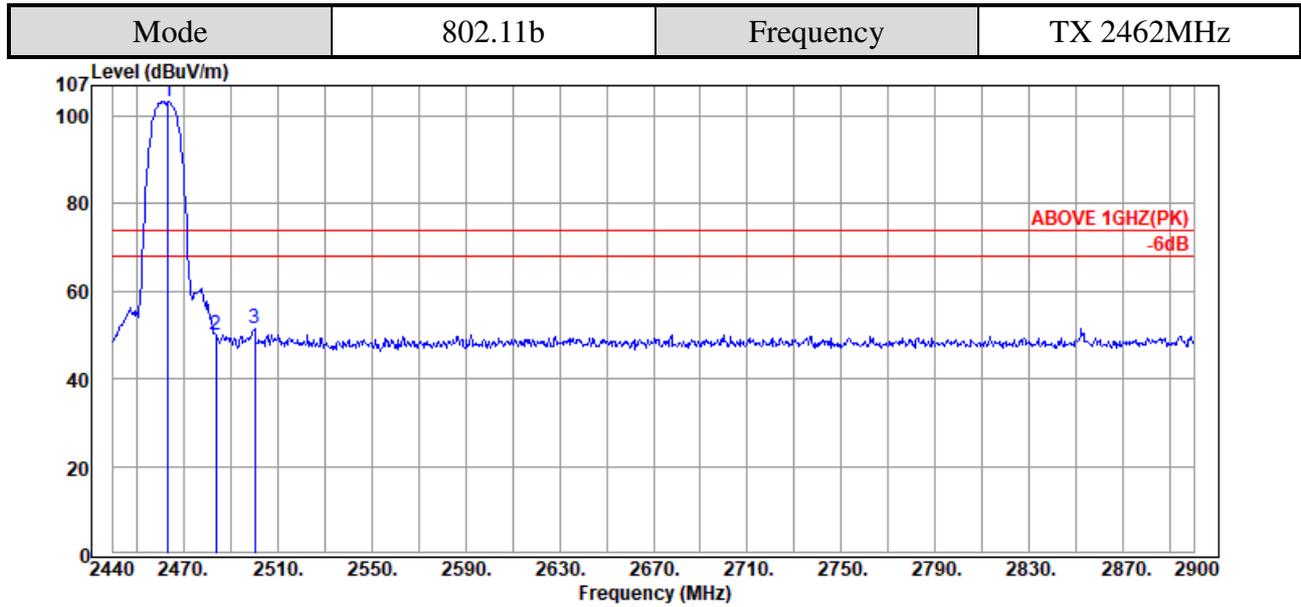

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.46	28.58	6.11	68.81	103.50	---	---	Peak
2483.70	28.70	6.13	15.19	50.02	74.00	23.98	Peak
2500.26	28.80	6.15	16.54	51.49	74.00	22.51	Peak

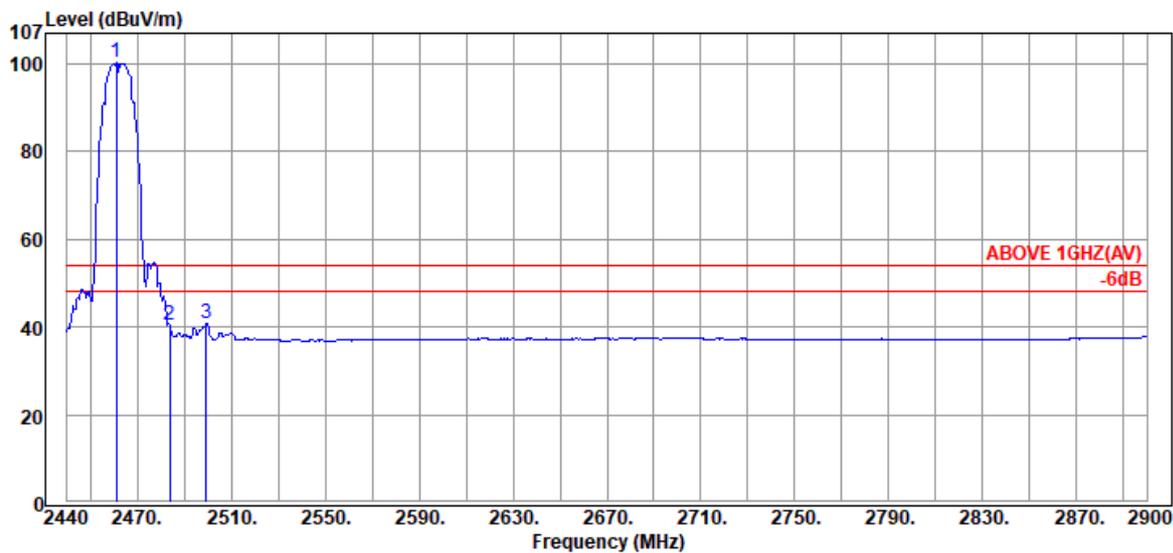

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.16	28.57	6.11	65.55	100.23	---	---	Average
2483.70	28.70	6.13	5.52	40.35	54.00	13.65	Average
2499.34	28.80	6.15	5.77	40.72	54.00	13.28	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

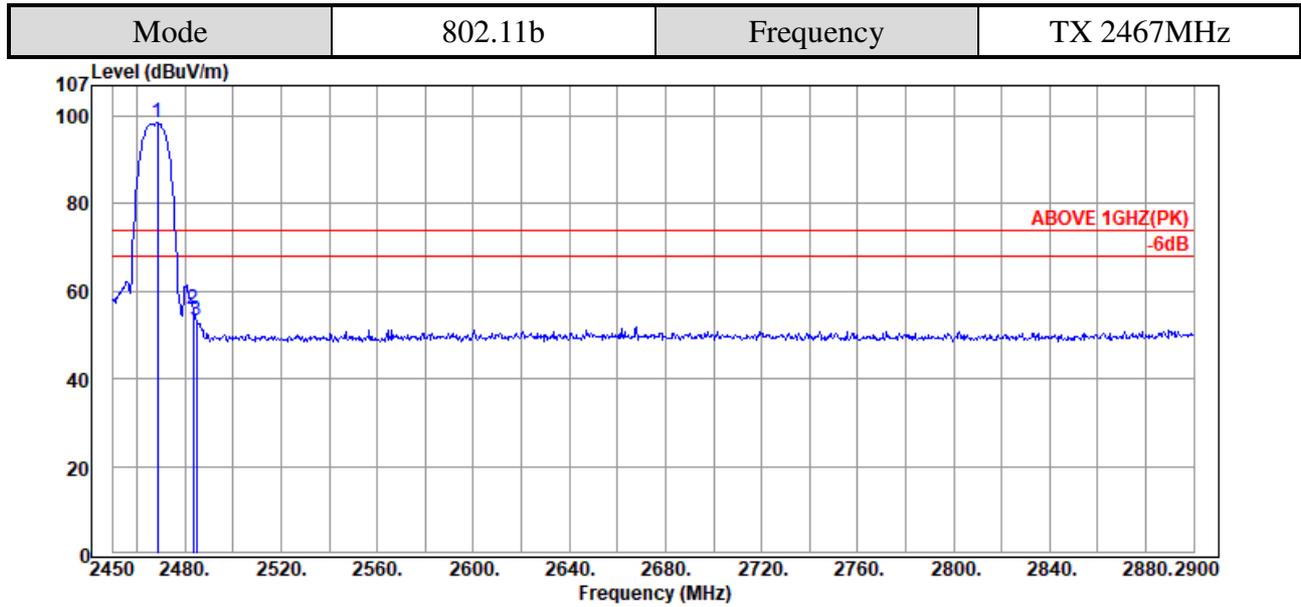

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.45	28.61	6.11	63.87	98.59	---	---	Peak
2483.30	28.70	6.13	21.21	56.04	74.00	17.96	Peak
2484.65	28.71	6.13	18.54	53.38	74.00	20.62	Peak

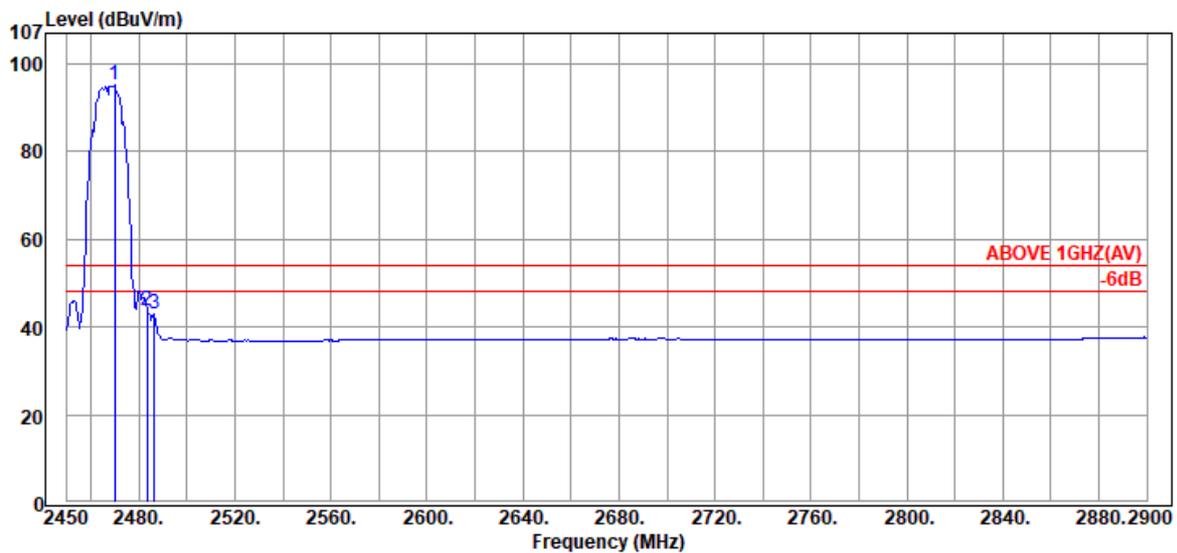


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.80	28.62	6.12	60.37	95.11	---	---	Average
2483.30	28.70	6.13	9.09	43.92	54.00	10.08	Average
2486.45	28.72	6.13	8.19	43.04	54.00	10.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

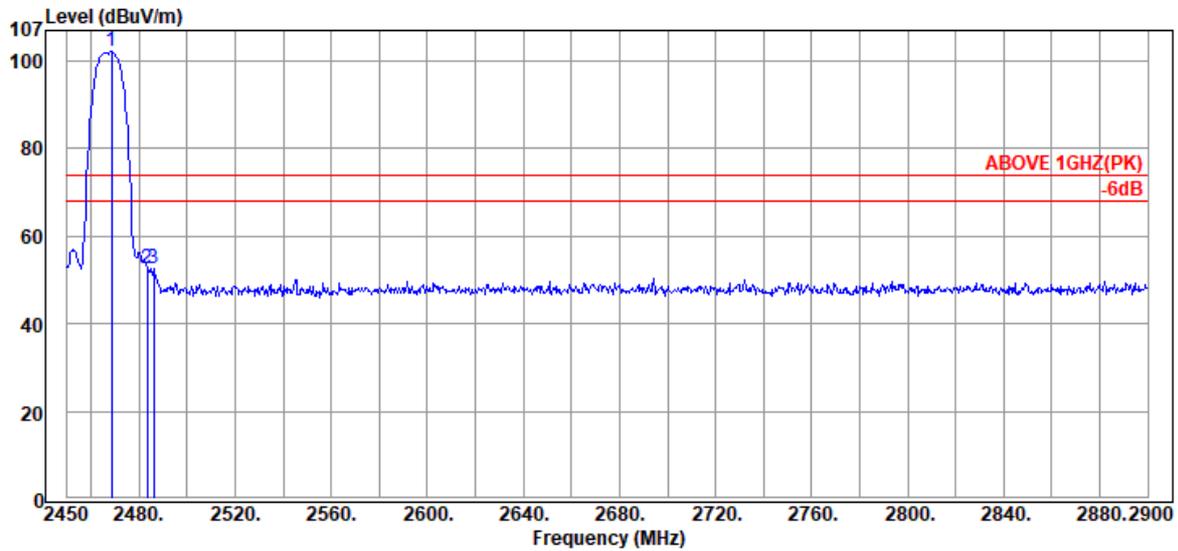

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.45	28.61	6.11	67.54	102.26	---	---	Peak
2483.30	28.70	6.13	17.76	52.59	74.00	21.41	Peak
2486.00	28.72	6.13	17.62	52.47	74.00	21.53	Peak

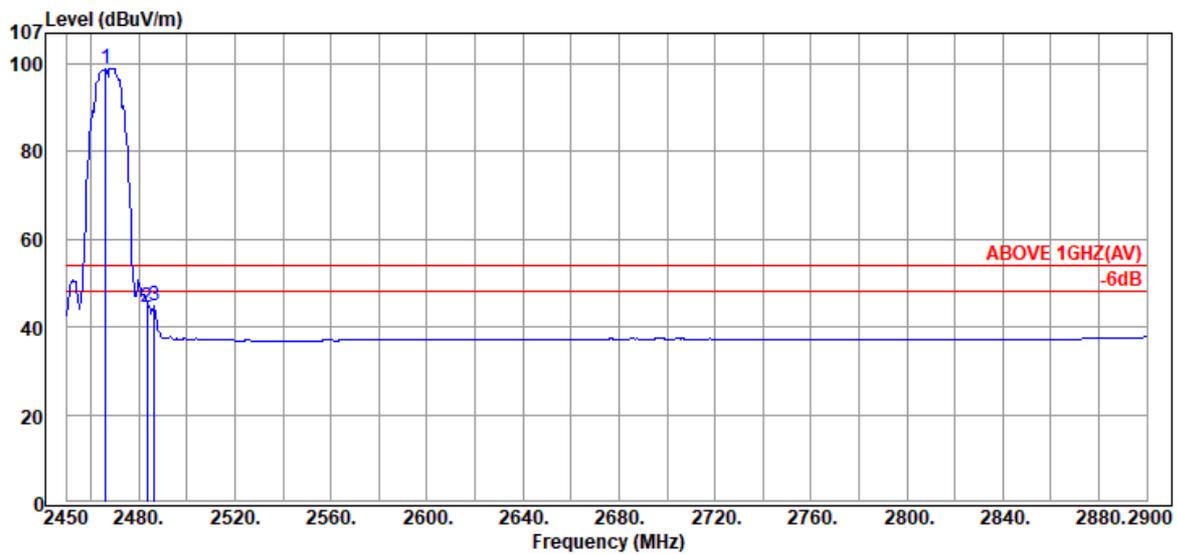

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.20	28.60	6.11	64.33	99.04	---	---	Average
2483.30	28.70	6.13	9.64	44.47	54.00	9.53	Average
2486.45	28.72	6.13	9.89	44.74	54.00	9.26	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

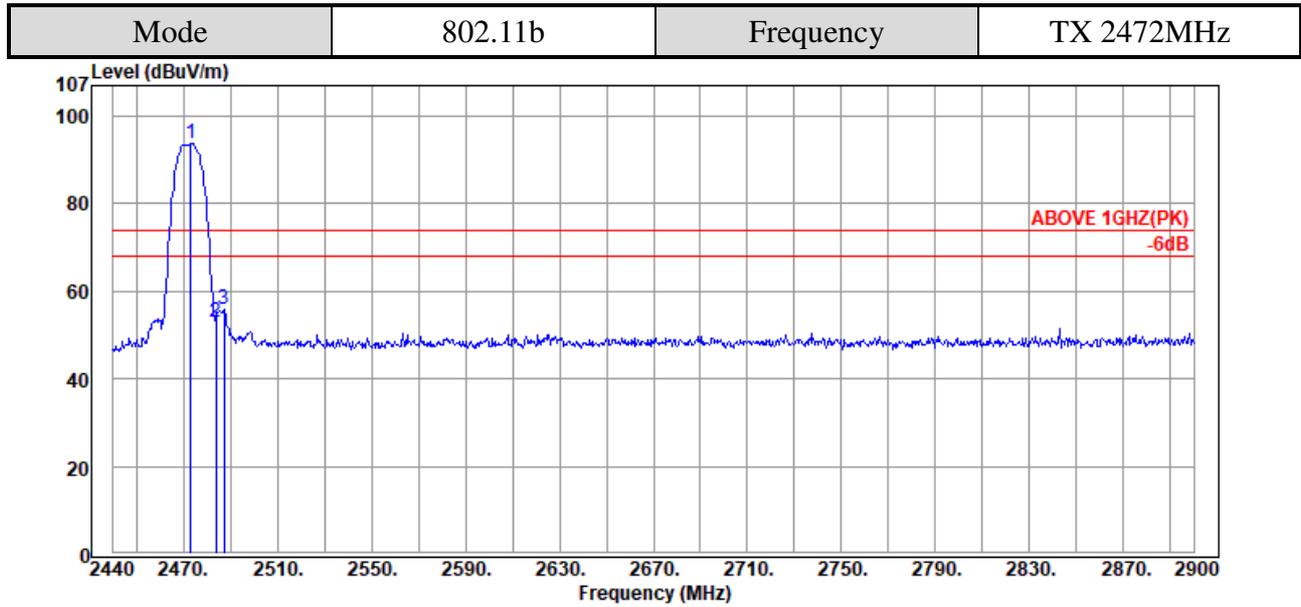

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.12	28.64	6.12	59.16	93.92	---	---	Peak
2483.70	28.70	6.13	18.00	52.83	74.00	21.17	Peak
2487.38	28.72	6.14	21.12	55.98	74.00	18.02	Peak

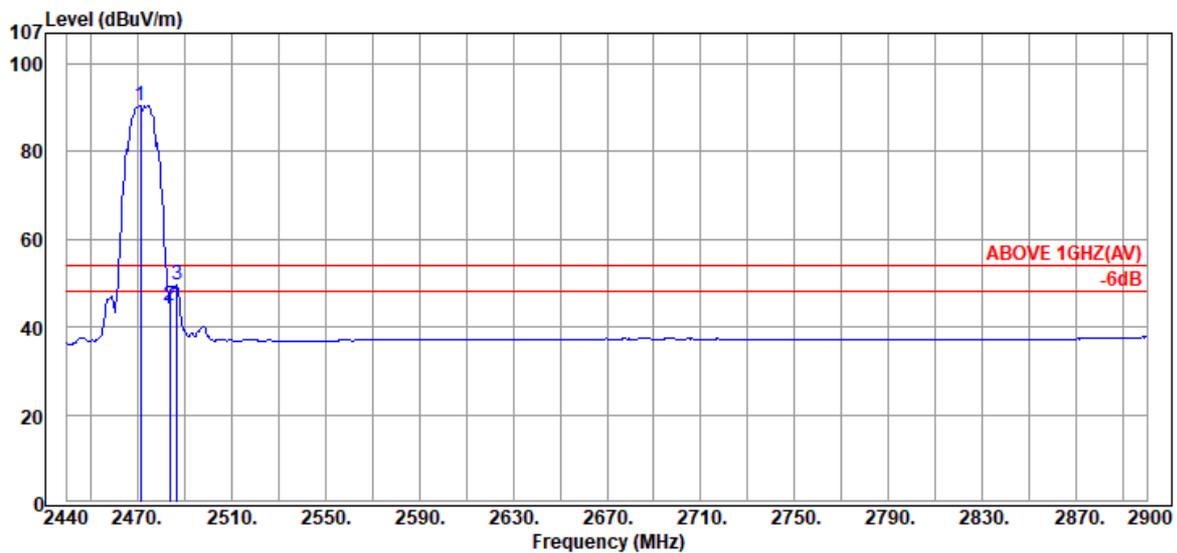

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.28	28.63	6.12	55.78	90.53	---	---	Average
2483.70	28.70	6.13	10.04	44.87	54.00	9.13	Average
2486.92	28.72	6.14	14.65	49.51	54.00	4.49	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

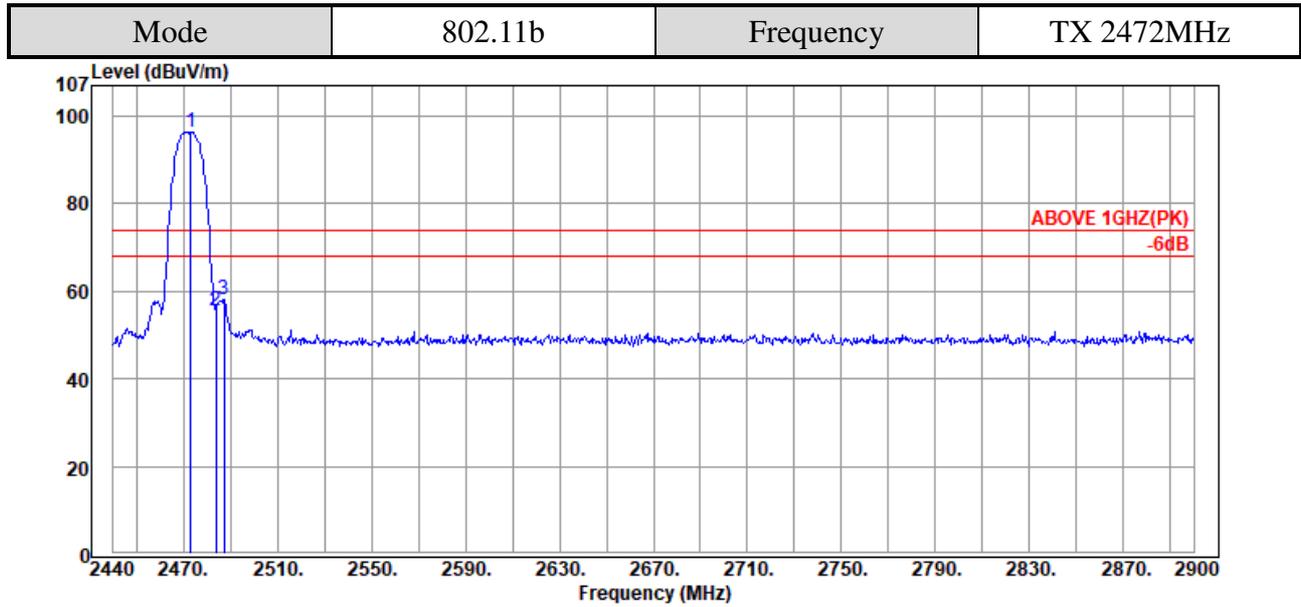

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.12	28.64	6.12	61.74	96.50	---	---	Peak
2483.70	28.70	6.13	20.71	55.54	74.00	18.46	Peak
2487.38	28.72	6.14	23.38	58.24	74.00	15.76	Peak

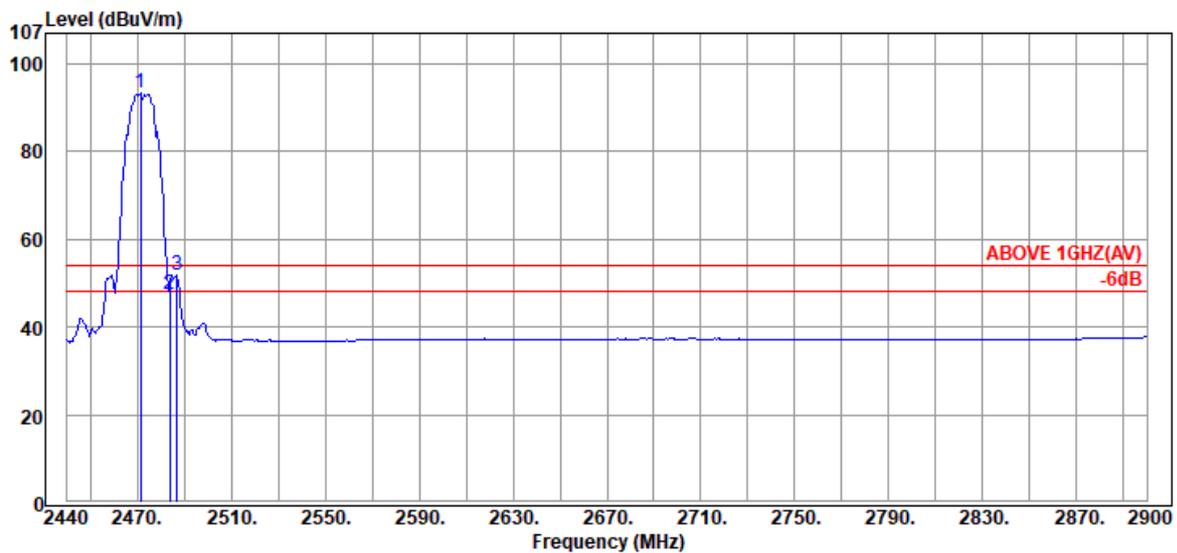


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.28	28.63	6.12	58.49	93.24	---	---	Average
2483.70	28.70	6.13	12.54	47.37	54.00	6.63	Average
2486.92	28.72	6.14	17.06	51.92	54.00	2.08	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

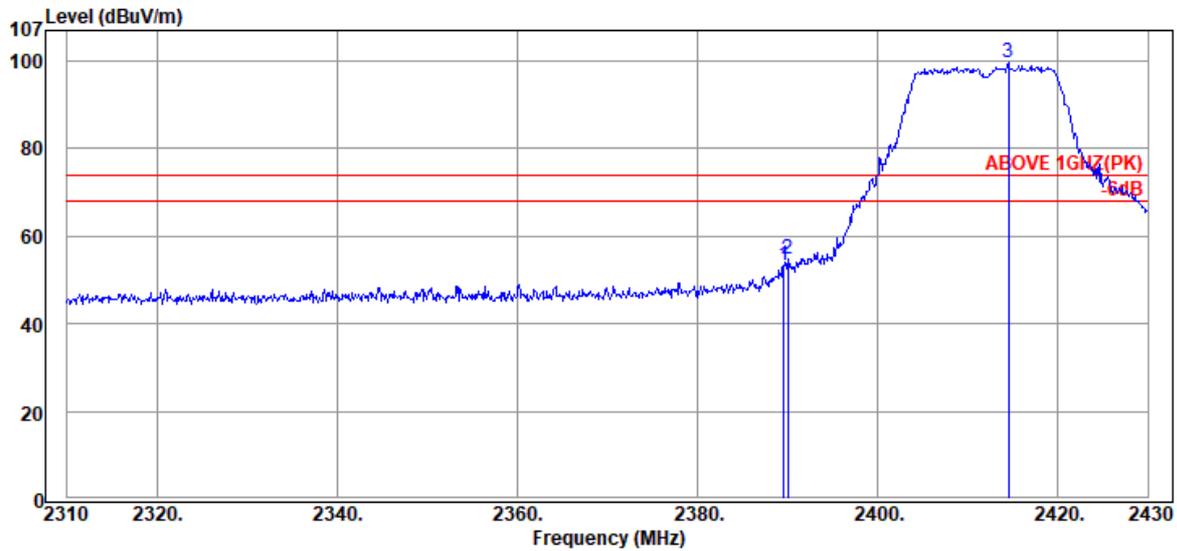

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	19.15	53.49	74.00	20.51	Peak
2390.04	28.32	6.03	20.42	54.77	74.00	19.23	Peak
@ 2414.52	28.43	6.05	65.09	99.57	---	---	Peak

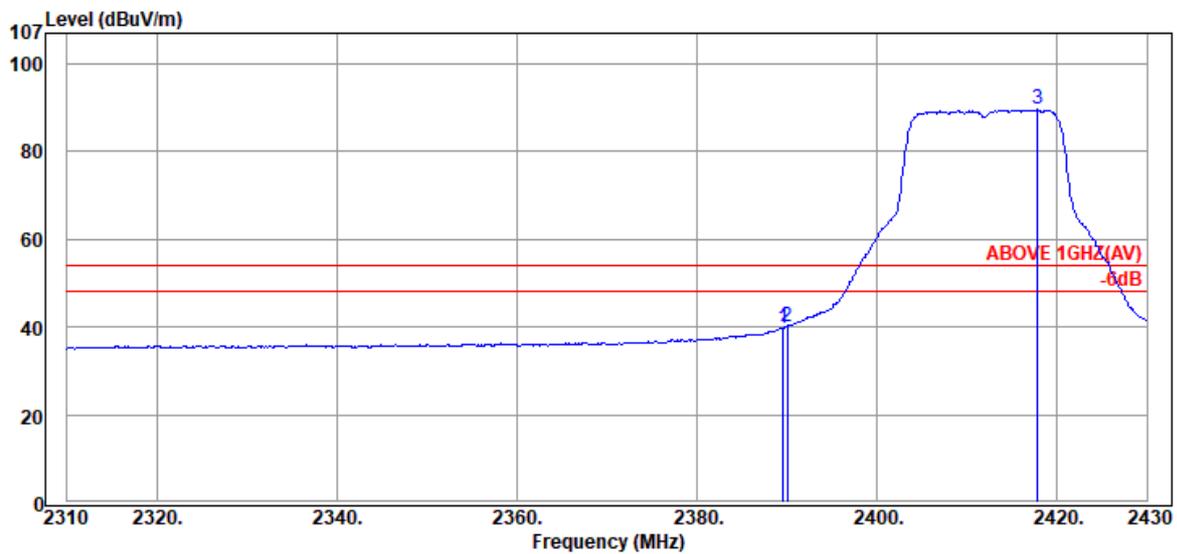

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	5.46	39.80	54.00	14.20	Average
2390.04	28.32	6.03	5.84	40.19	54.00	13.81	Average
@ 2417.88	28.44	6.06	55.07	89.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

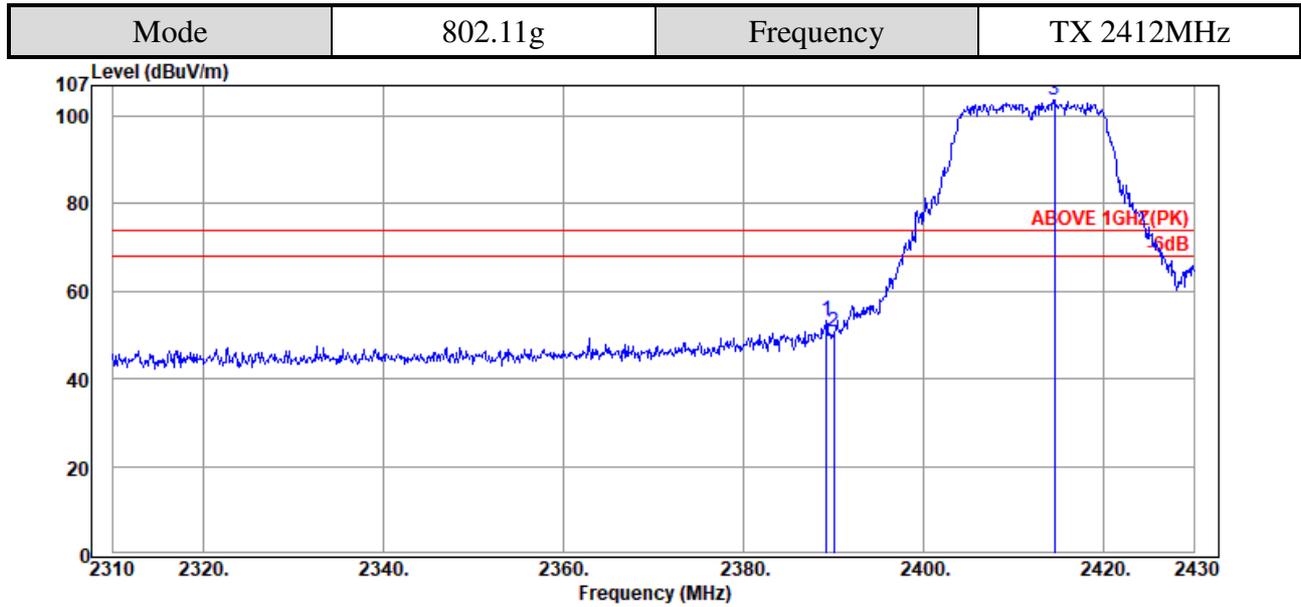

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.20	28.31	6.02	18.90	53.23	74.00	20.77	Peak
2390.04	28.32	6.03	16.42	50.77	74.00	23.23	Peak
@ 2414.52	28.43	6.05	69.22	103.70	---	---	Peak

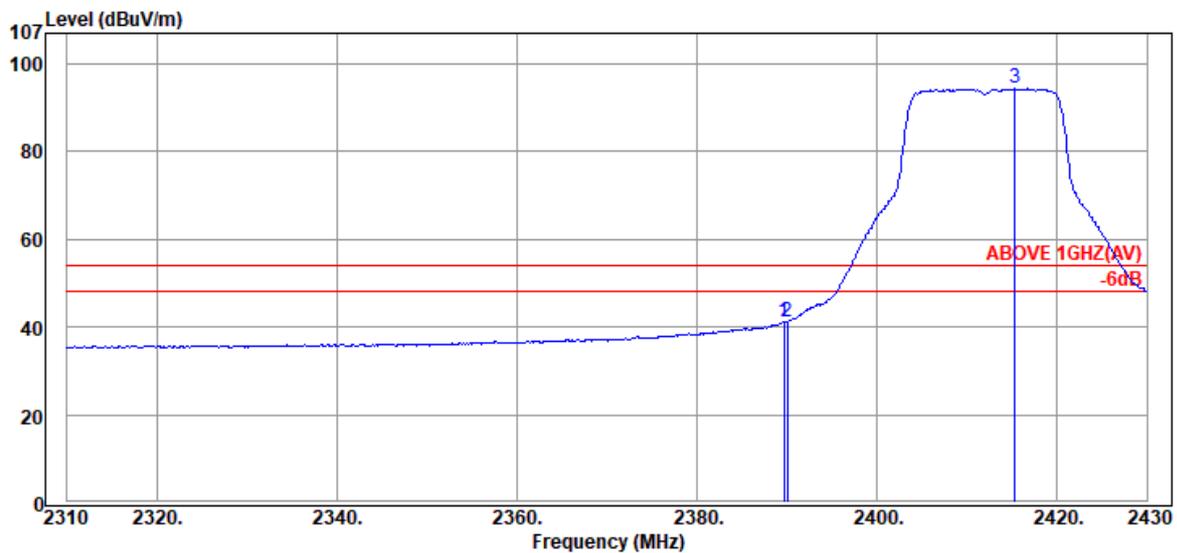

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	6.91	41.25	54.00	12.75	Average
2390.04	28.32	6.03	6.98	41.33	54.00	12.67	Average
@ 2415.36	28.43	6.05	59.88	94.36	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

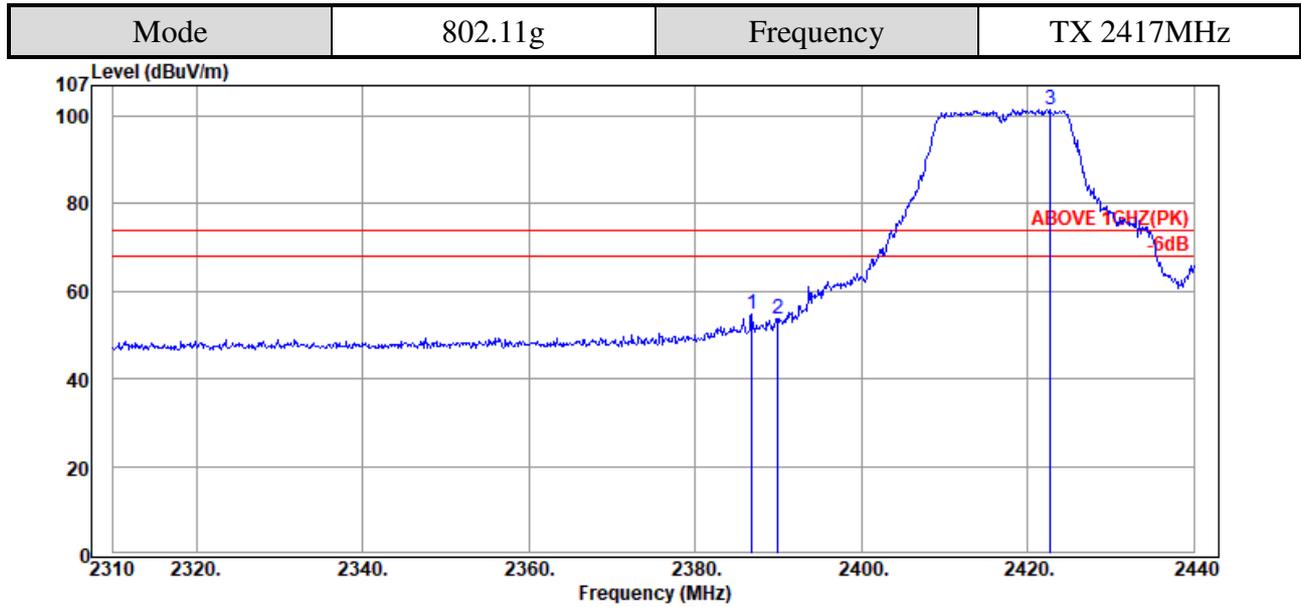

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.83	28.29	6.02	20.42	54.73	74.00	19.27	Peak
2389.95	28.32	6.02	19.39	53.73	74.00	20.27	Peak
@ 2422.71	28.45	6.06	67.15	101.66	---	---	Peak

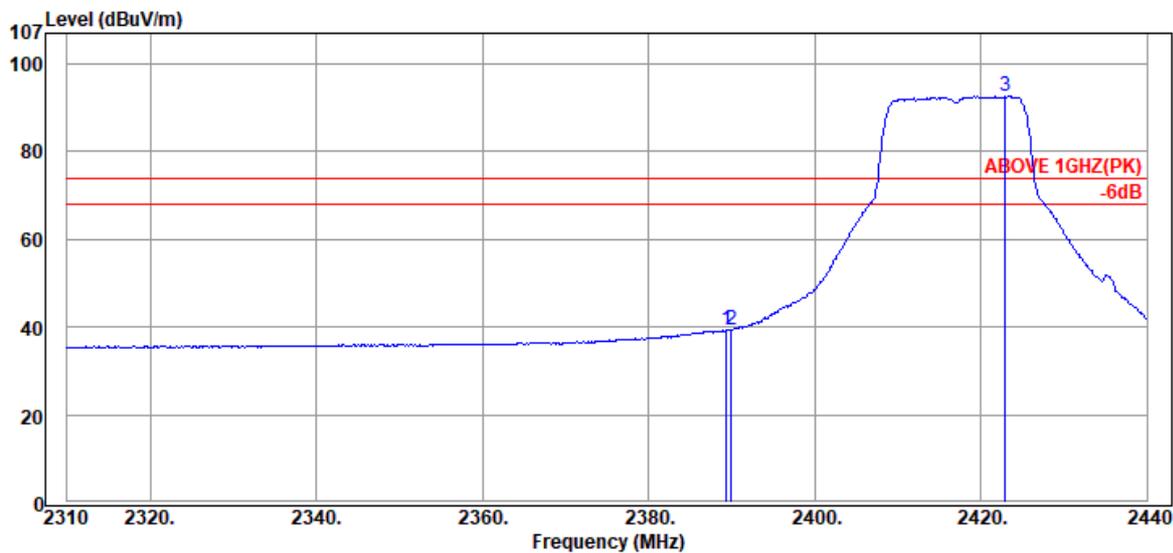

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.43	28.32	6.02	5.10	39.44	54.00	14.56	Average
2389.95	28.32	6.02	5.19	39.53	54.00	14.47	Average
@ 2422.97	28.45	6.06	58.14	92.65	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

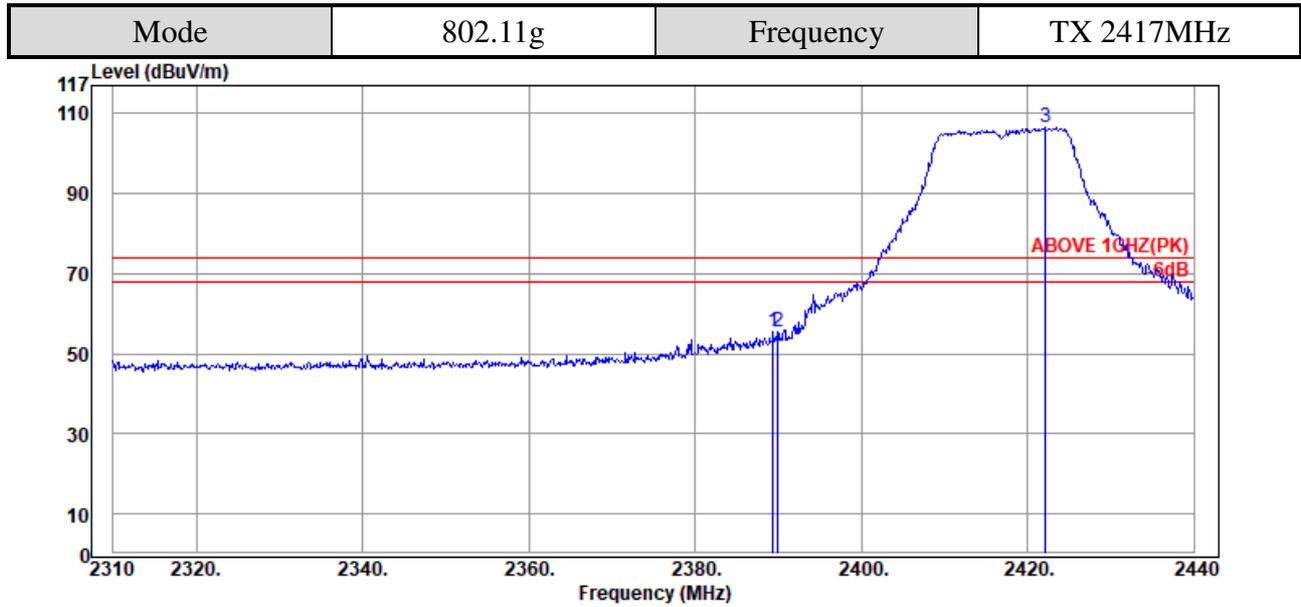

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.43	28.32	6.02	21.09	55.43	74.00	18.57	Peak
2389.95	28.32	6.02	21.14	55.48	74.00	18.52	Peak
@ 2422.19	28.44	6.06	72.20	106.70	---	---	Peak

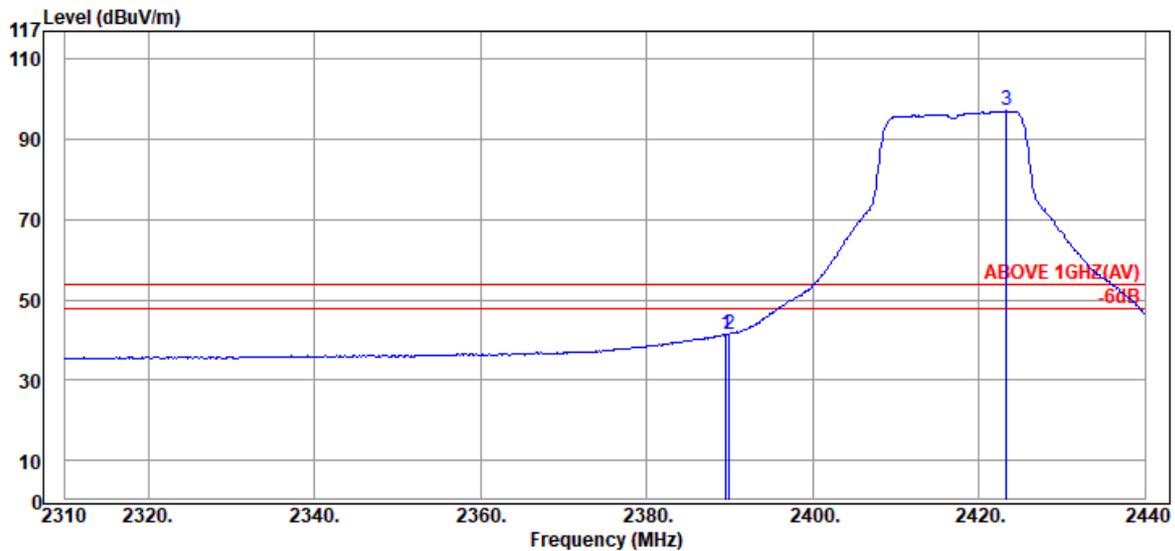


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	6.98	41.32	54.00	12.68	Average
2389.95	28.32	6.02	7.20	41.54	54.00	12.46	Average
@ 2423.36	28.45	6.06	62.64	97.15	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

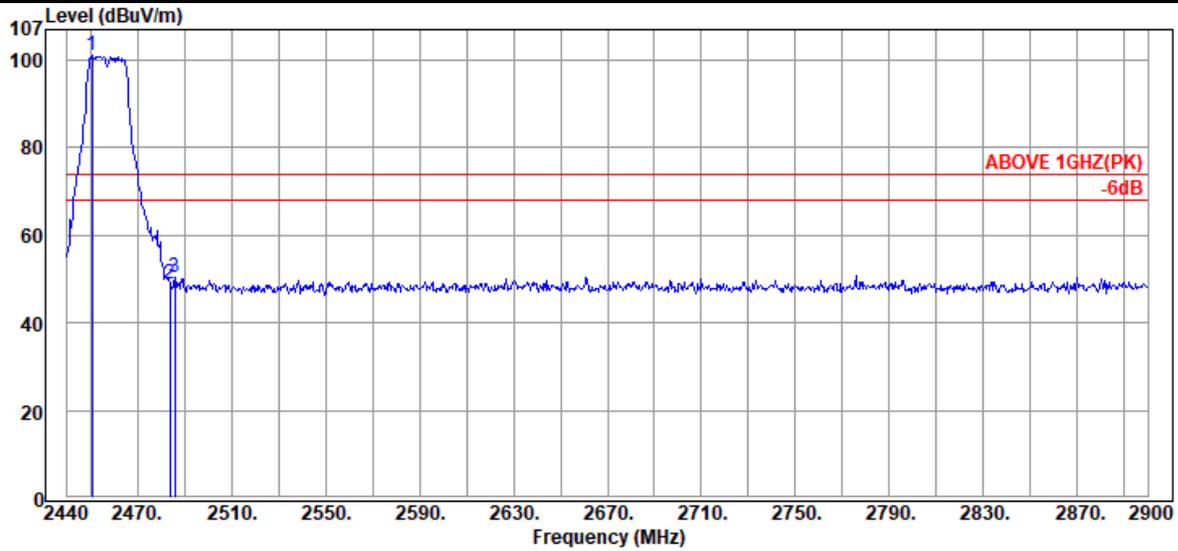

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.58	28.50	6.09	66.35	100.94	---	---	Peak
2483.70	28.70	6.13	14.20	49.03	74.00	24.97	Peak
2486.00	28.72	6.13	15.47	50.32	74.00	23.68	Peak

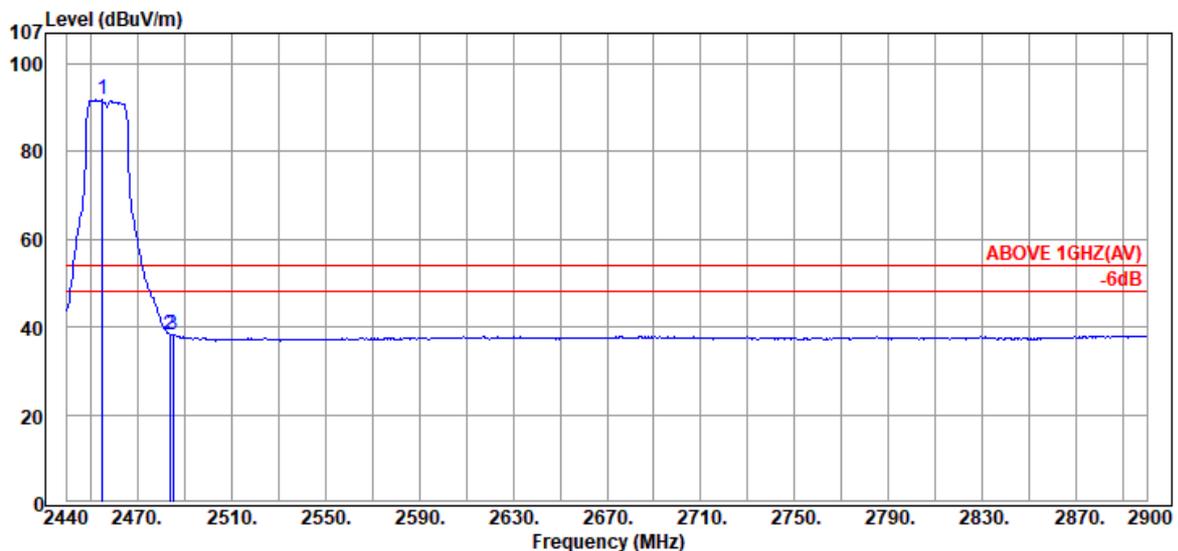


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.18	28.53	6.10	57.19	91.82	---	---	Average
2483.70	28.70	6.13	3.44	38.27	54.00	15.73	Average
2485.08	28.71	6.13	3.27	38.11	54.00	15.89	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

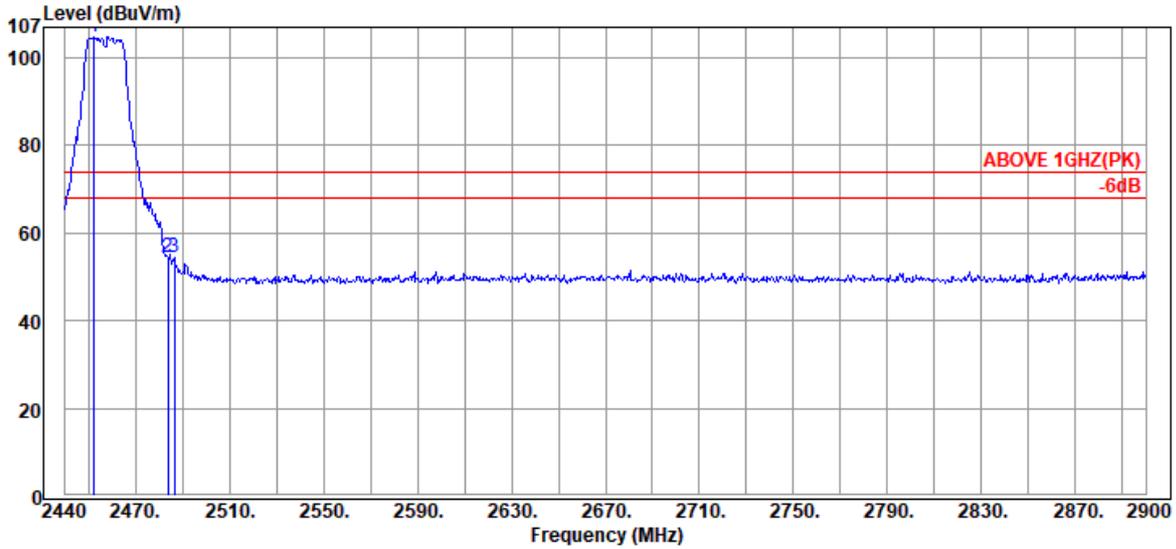

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.42	28.51	6.10	70.18	104.79	---	---	Peak
2483.70	28.70	6.13	19.65	54.48	74.00	19.52	Peak
2486.46	28.72	6.13	19.42	54.27	74.00	19.73	Peak

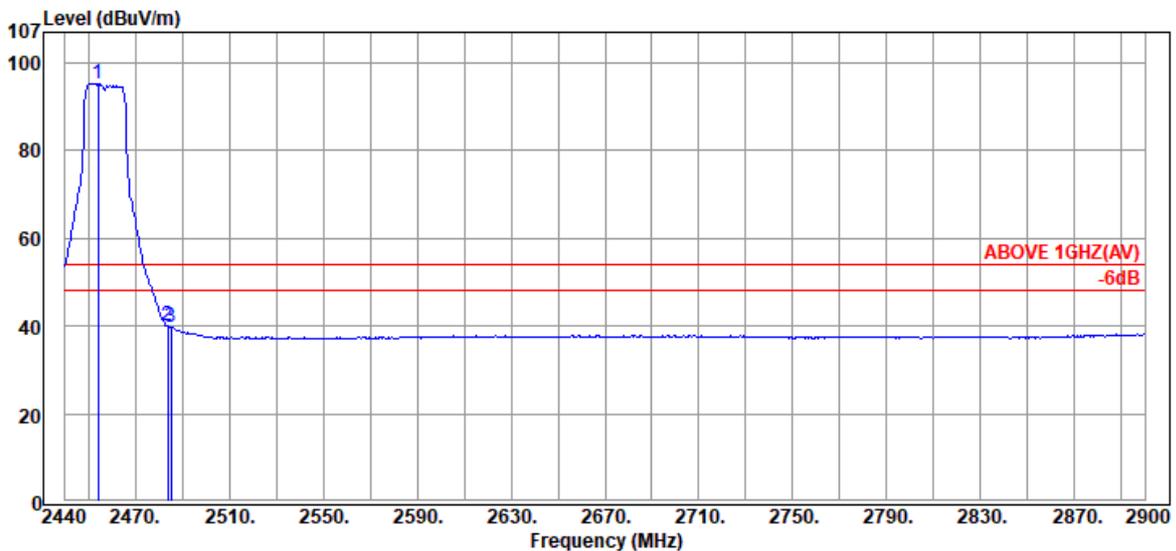

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.26	28.53	6.10	60.65	95.28	---	---	Average
2483.70	28.70	6.13	5.37	40.20	54.00	13.80	Average
2485.08	28.71	6.13	4.82	39.66	54.00	14.34	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

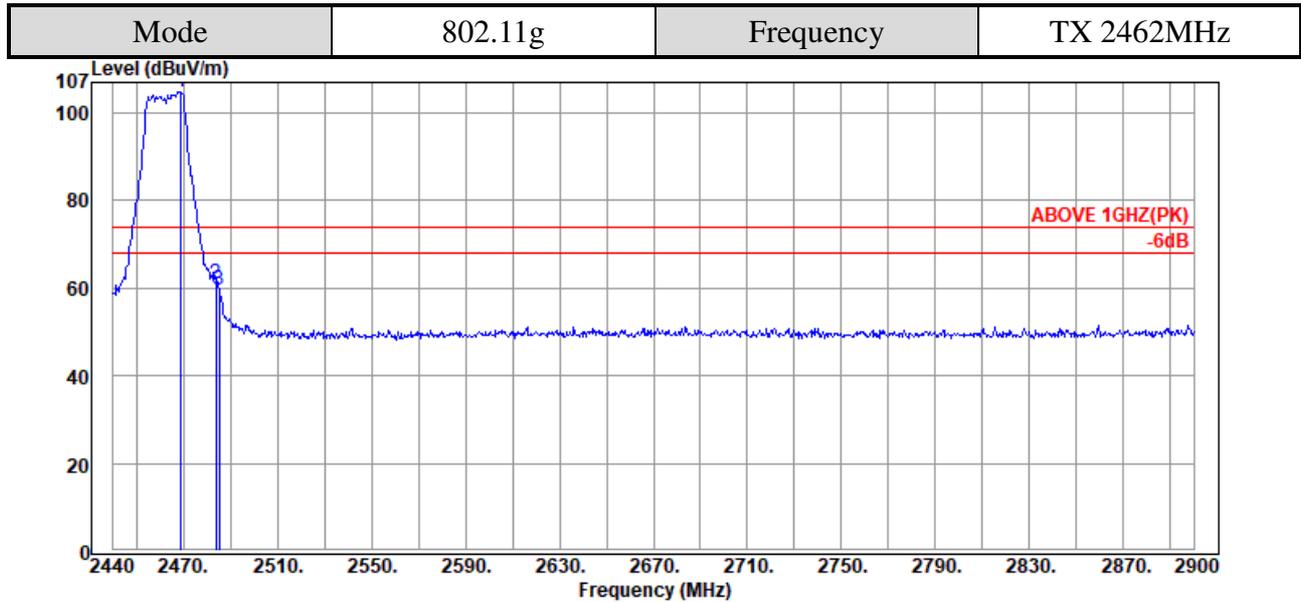

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.98	28.61	6.12	70.14	104.87	---	---	Peak
2483.70	28.70	6.13	26.34	61.17	74.00	12.83	Peak
2485.08	28.71	6.13	24.72	59.56	74.00	14.44	Peak

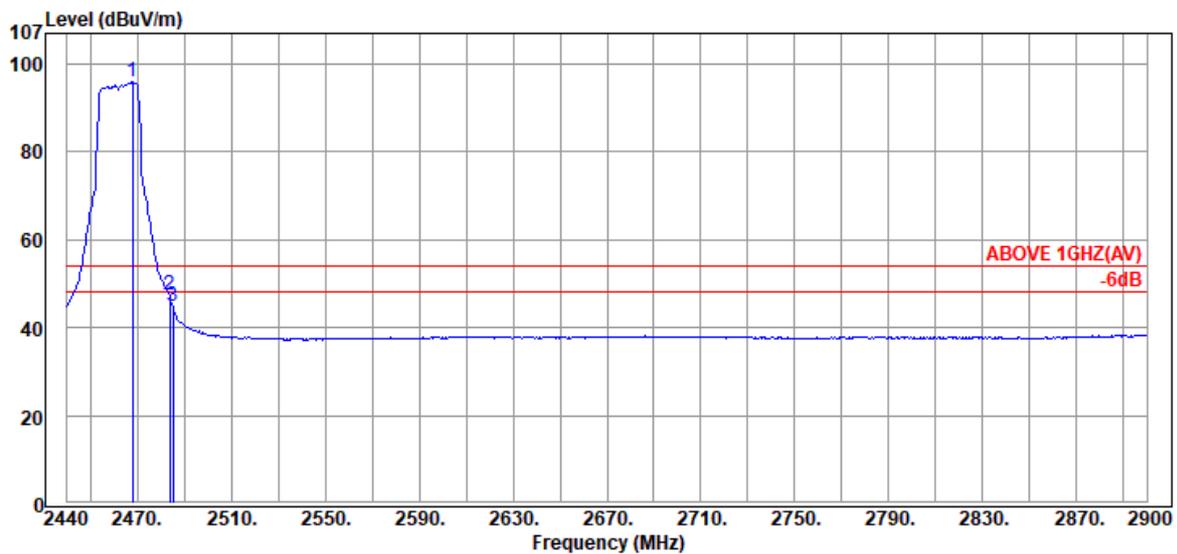

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.06	28.61	6.11	61.22	95.94	---	---	Average
2483.70	28.70	6.13	12.51	47.34	54.00	6.66	Average
2485.08	28.71	6.13	10.08	44.92	54.00	9.08	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

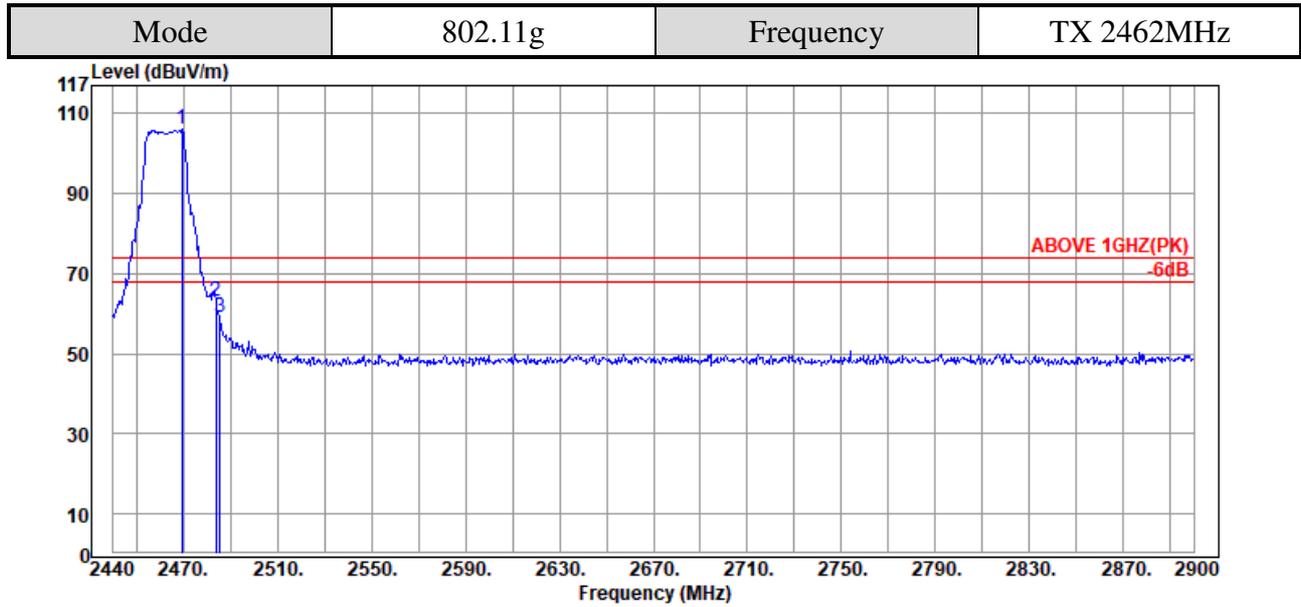

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.44	28.62	6.12	71.27	106.01	---	---	Peak
2483.70	28.70	6.13	28.09	62.92	74.00	11.08	Peak
2485.54	28.71	6.13	24.33	59.17	74.00	14.83	Peak

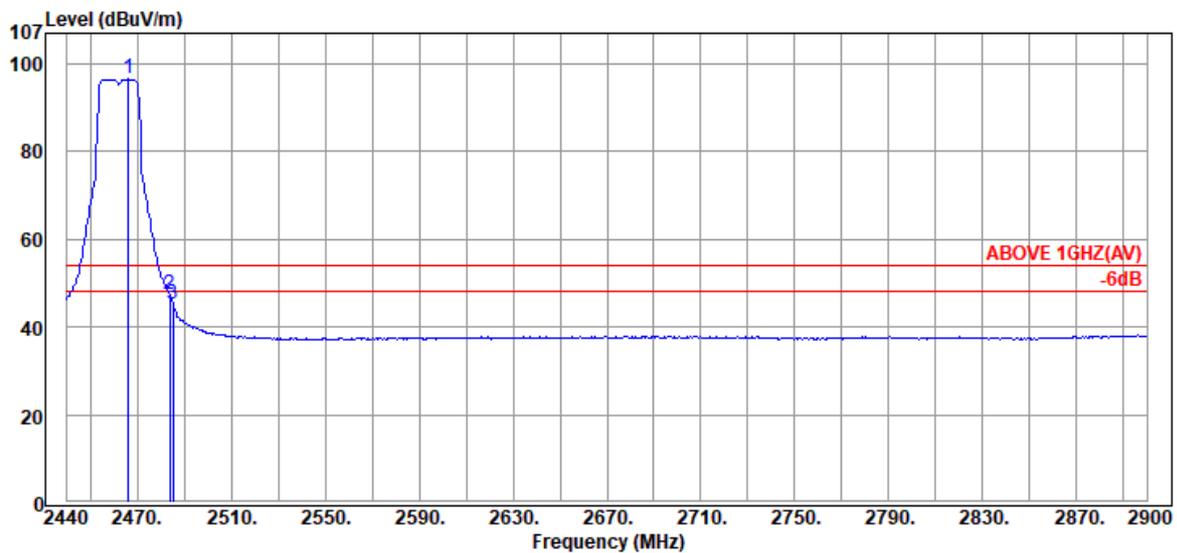

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.22	28.60	6.11	61.81	96.52	---	---	Average
2483.70	28.70	6.13	12.65	47.48	54.00	6.52	Average
2485.08	28.71	6.13	10.39	45.23	54.00	8.77	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

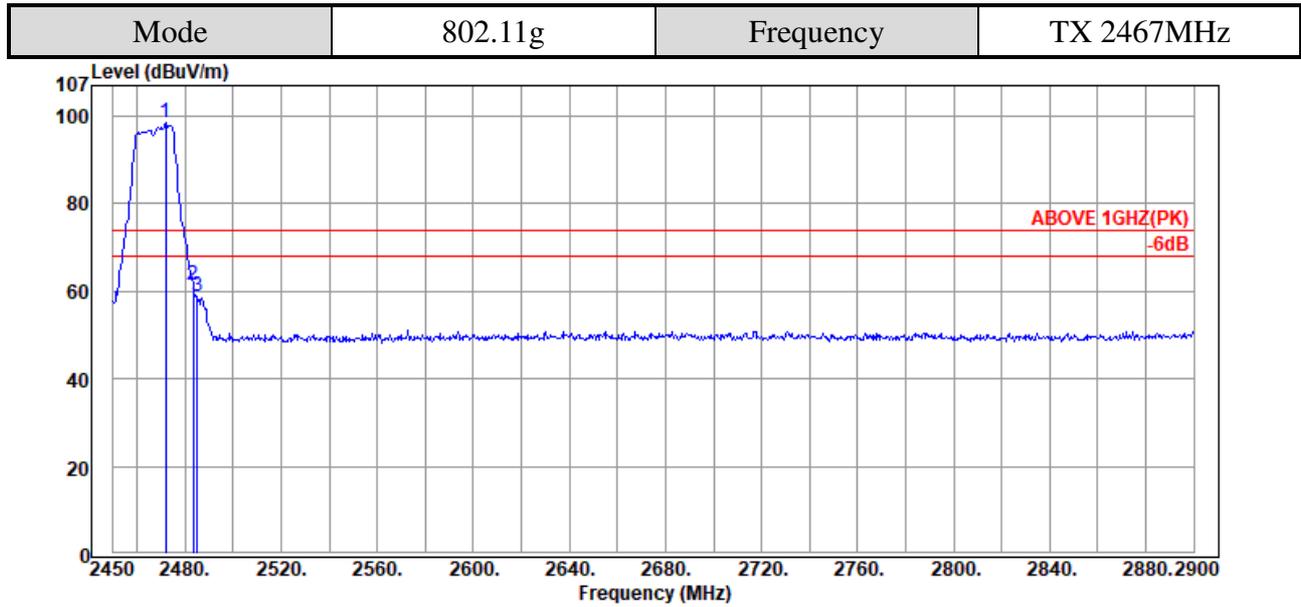

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.05	28.63	6.12	63.63	98.38	---	---	Peak
2483.30	28.70	6.13	26.44	61.27	74.00	12.73	Peak
2485.10	28.71	6.13	23.82	58.66	74.00	15.34	Peak

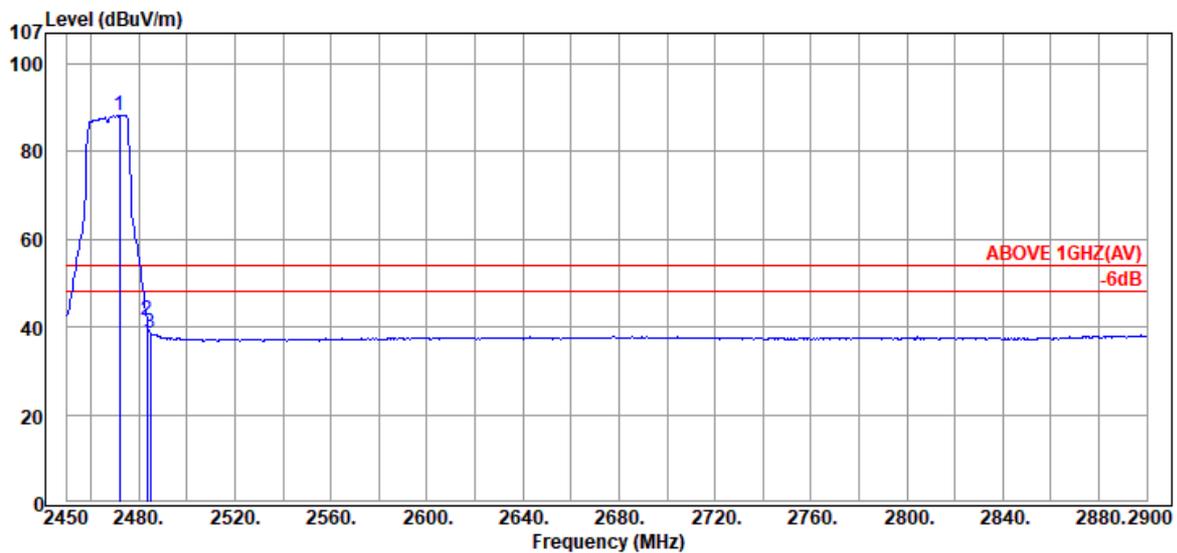


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.05	28.63	6.12	53.64	88.39	---	---	Average
2483.30	28.70	6.13	6.83	41.66	54.00	12.34	Average
2484.65	28.71	6.13	3.94	38.78	54.00	15.22	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

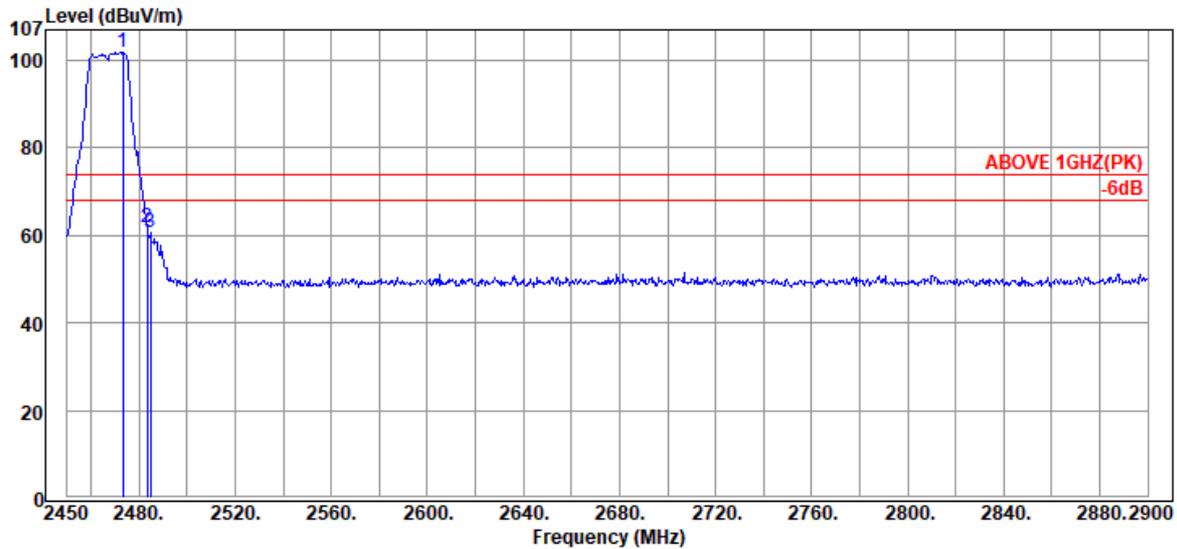

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.40	28.64	6.12	67.08	101.84	---	---	Peak
2483.30	28.70	6.13	26.90	61.73	74.00	12.27	Peak
2484.65	28.71	6.13	25.85	60.69	74.00	13.31	Peak

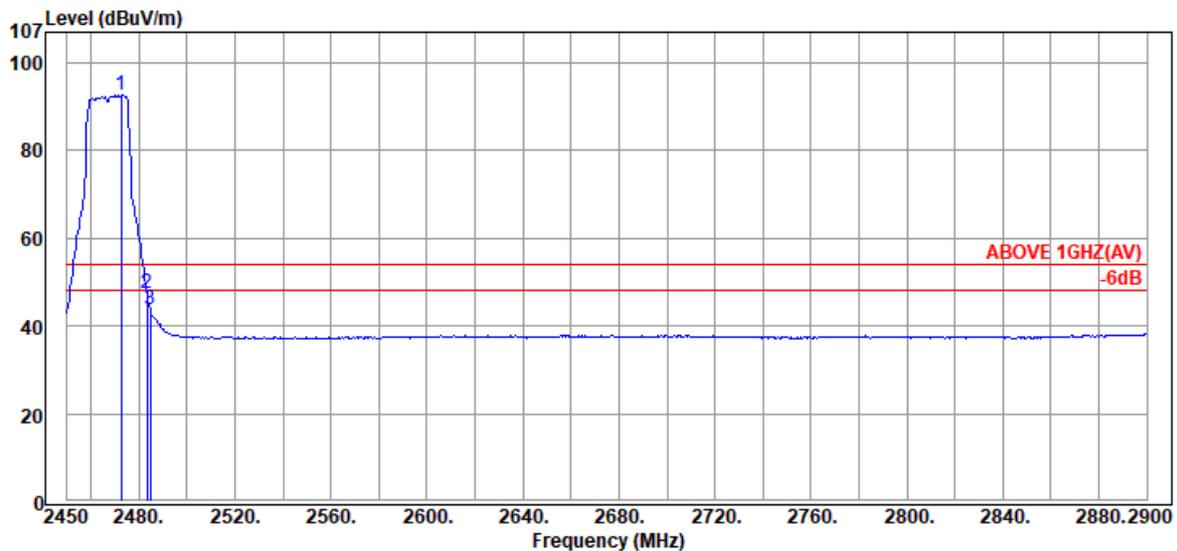

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.50	28.64	6.12	57.92	92.68	---	---	Average
2483.30	28.70	6.13	12.51	47.34	54.00	6.66	Average
2484.65	28.71	6.13	8.88	43.72	54.00	10.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

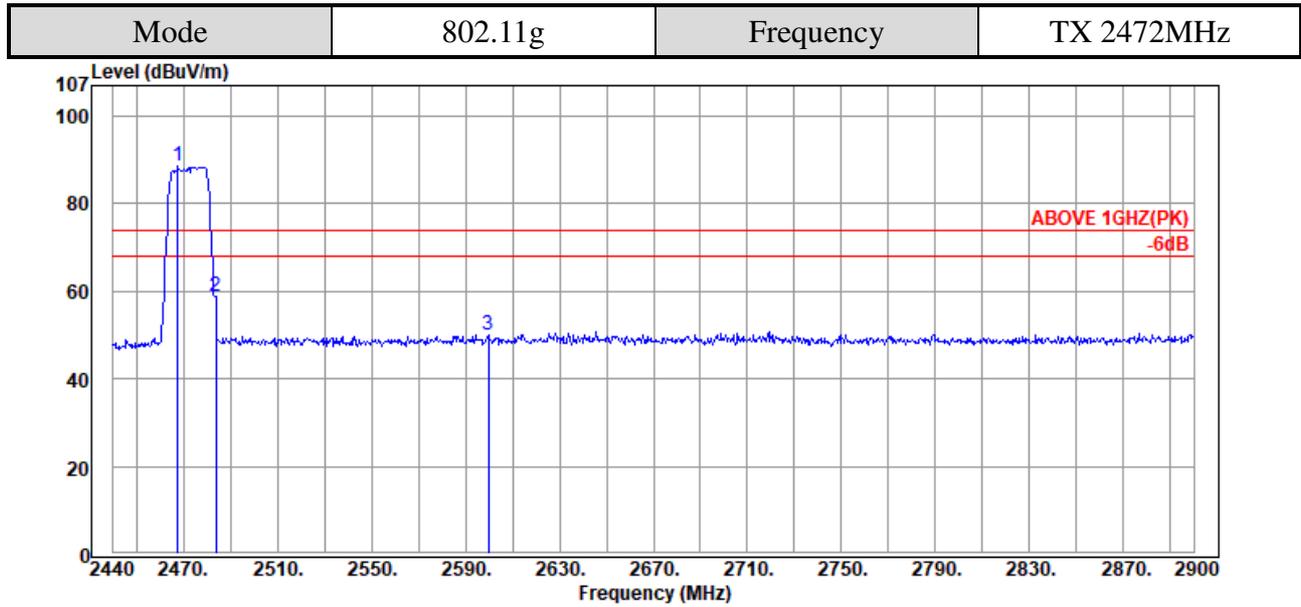

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.60	28.61	6.11	54.04	88.76	---	---	Peak
2483.70	28.70	6.13	23.97	58.80	74.00	15.20	Peak
2599.62	29.10	6.28	14.56	49.94	74.00	24.06	Peak

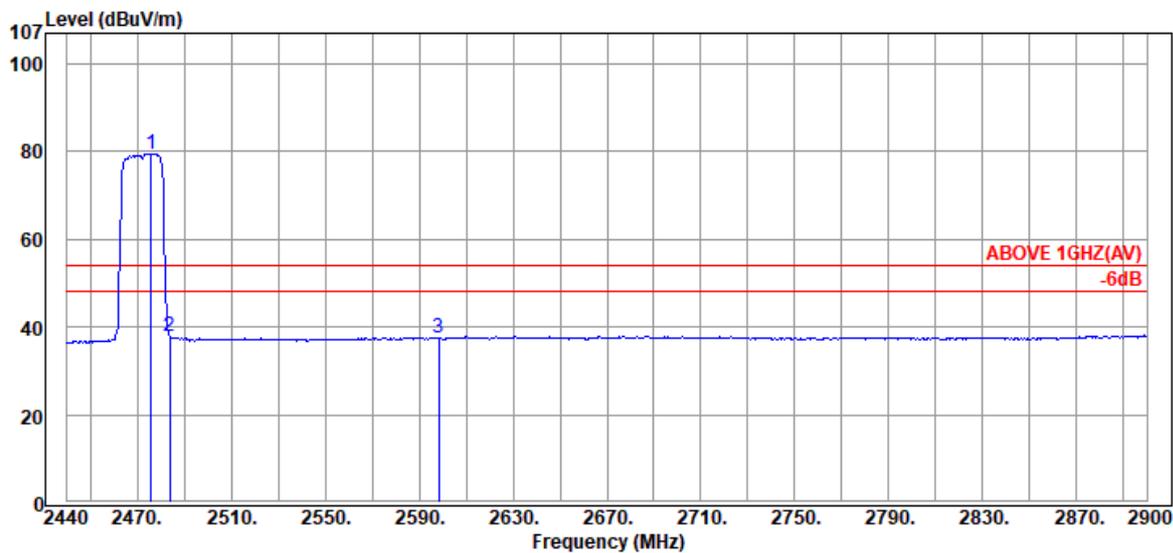


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.88	28.66	6.12	44.82	79.60	---	---	Average
2483.70	28.70	6.13	2.96	37.79	54.00	16.21	Average
2598.24	29.09	6.28	2.22	37.59	54.00	16.41	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

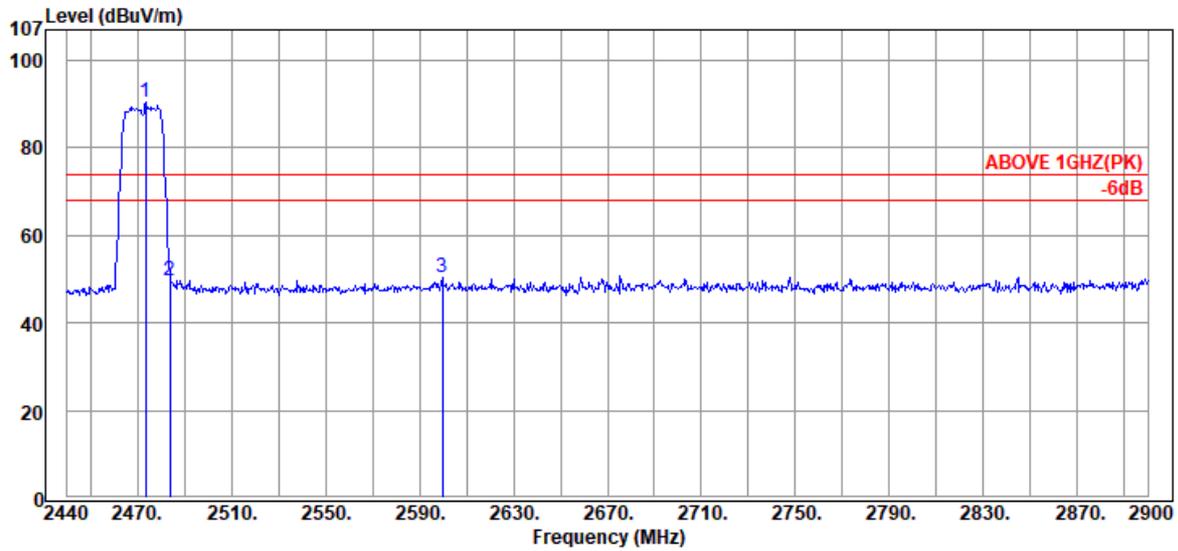

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.58	28.64	6.12	55.63	90.39	---	---	Peak
2483.70	28.70	6.13	14.74	49.57	74.00	24.43	Peak
2599.62	29.10	6.28	14.98	50.36	74.00	23.64	Peak

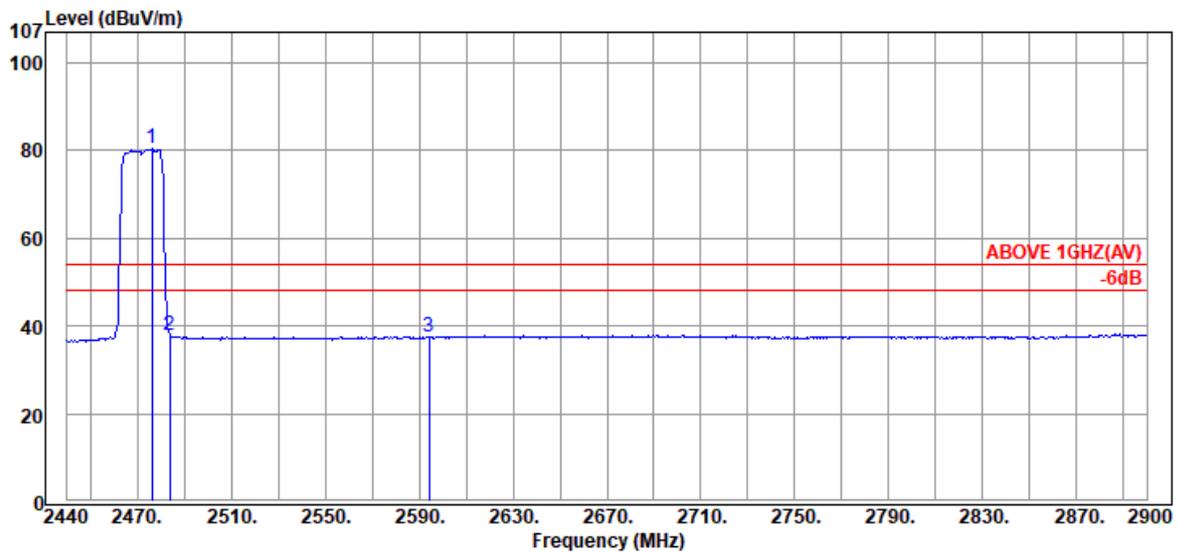


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.34	28.66	6.12	45.63	80.41	---	---	Average
2483.70	28.70	6.13	3.12	37.95	54.00	16.05	Average
2594.10	29.08	6.27	2.28	37.63	54.00	16.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

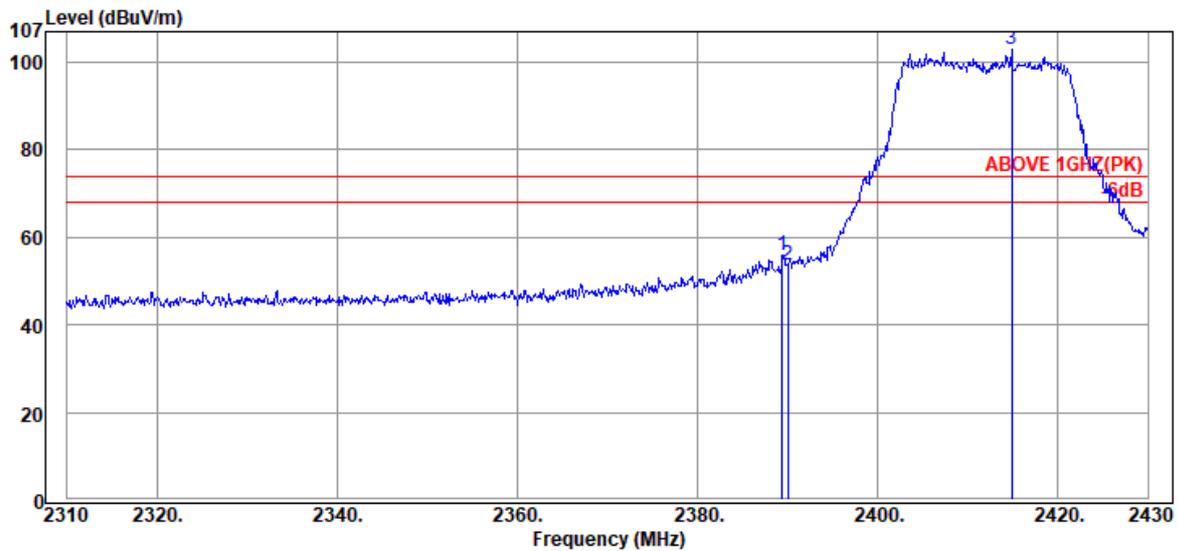

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	28.32	6.02	21.71	56.05	74.00	17.95	Peak
2390.04	28.32	6.03	19.19	53.54	74.00	20.46	Peak
@ 2414.88	28.43	6.05	68.44	102.92	---	---	Peak

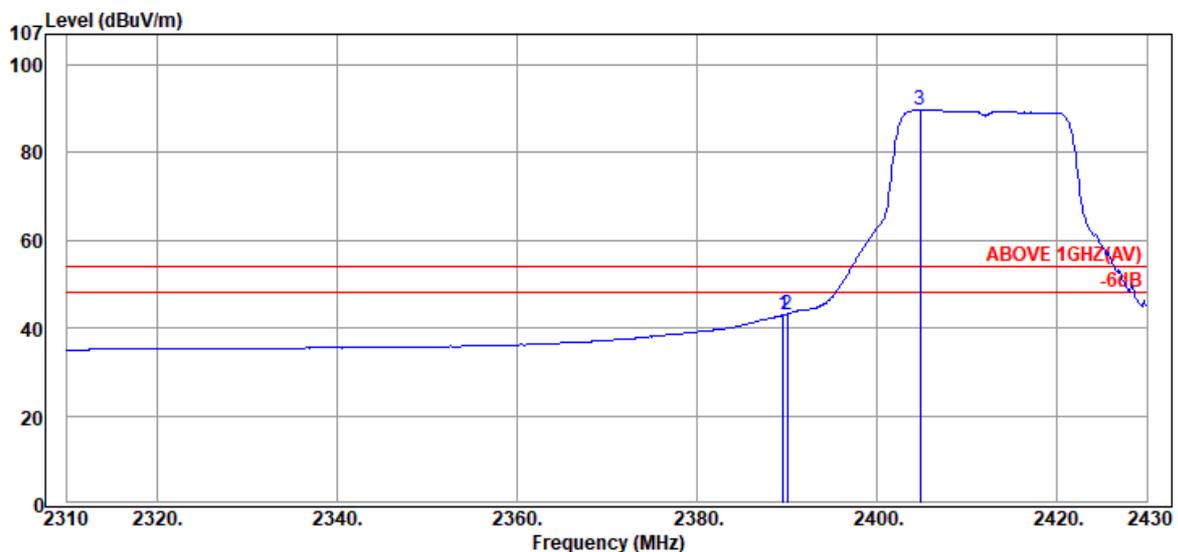

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	8.53	42.87	54.00	11.13	Average
2390.04	28.32	6.03	8.75	43.10	54.00	10.90	Average
@ 2404.80	28.41	6.04	55.19	89.64	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

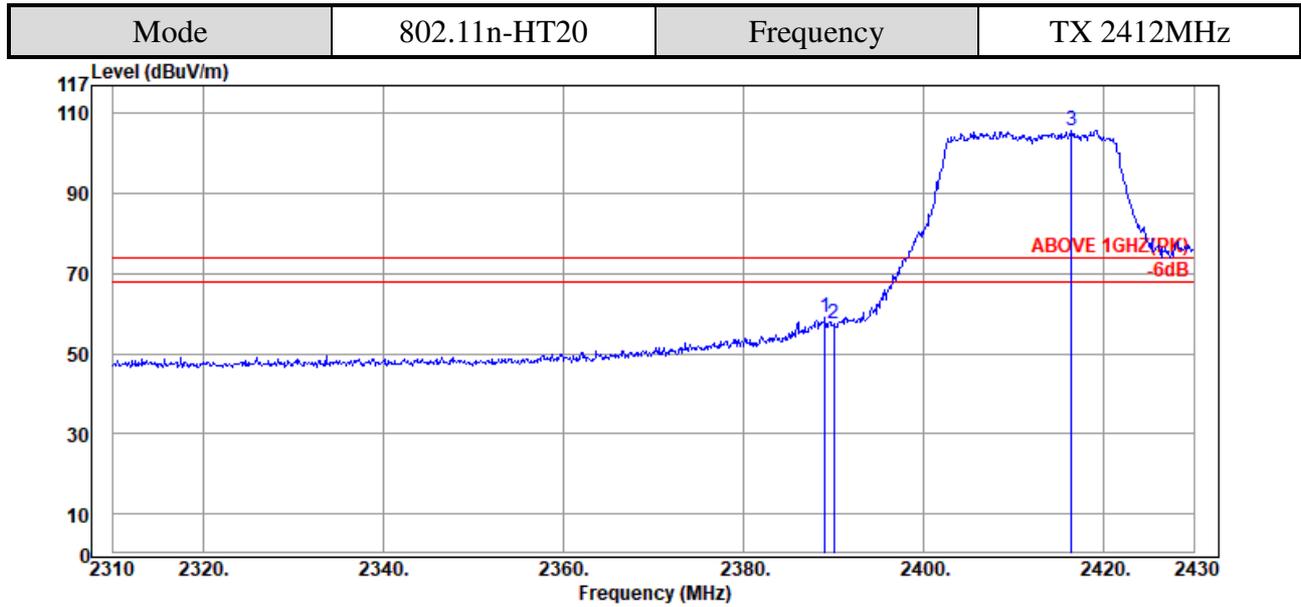

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.08	28.31	6.02	24.65	58.98	74.00	15.02	Peak
2390.04	28.32	6.03	23.01	57.36	74.00	16.64	Peak
@ 2416.44	28.43	6.06	71.33	105.82	---	---	Peak

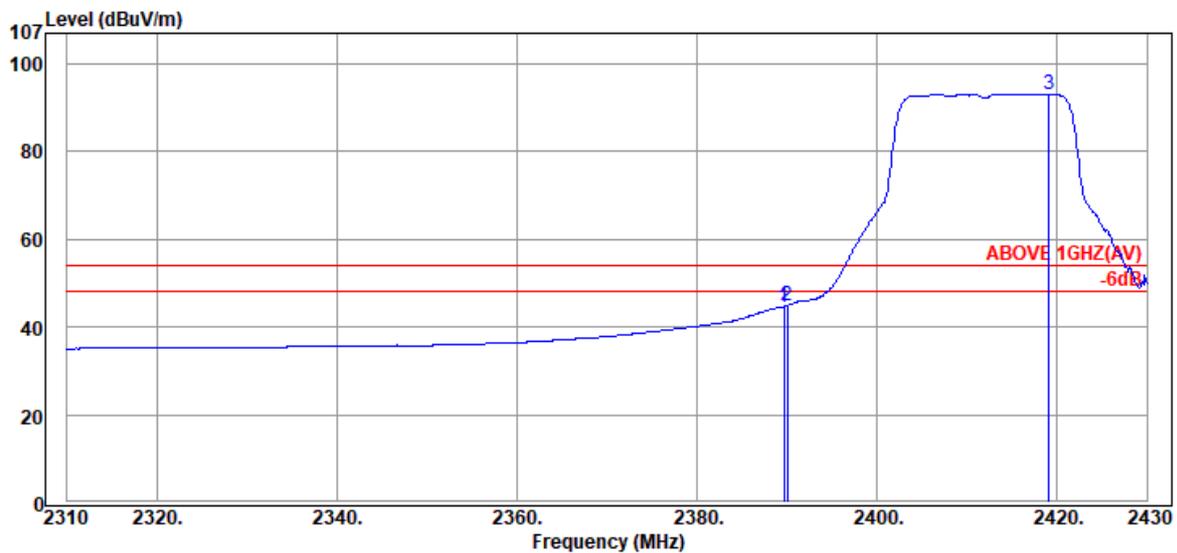

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	10.33	44.67	54.00	9.33	Average
2390.04	28.32	6.03	10.55	44.90	54.00	9.10	Average
@ 2419.08	28.44	6.06	58.69	93.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

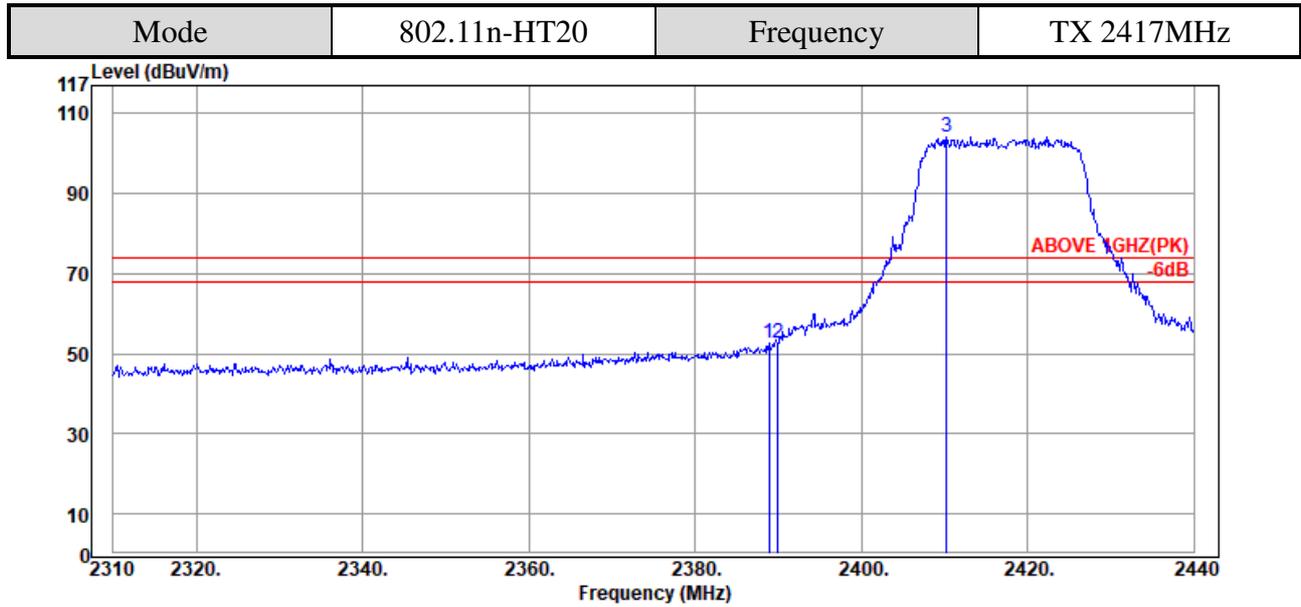

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.91	28.31	6.02	18.39	52.72	74.00	21.28	Peak
2389.95	28.32	6.02	18.39	52.73	74.00	21.27	Peak
@ 2410.23	28.42	6.05	69.74	104.21	---	---	Peak

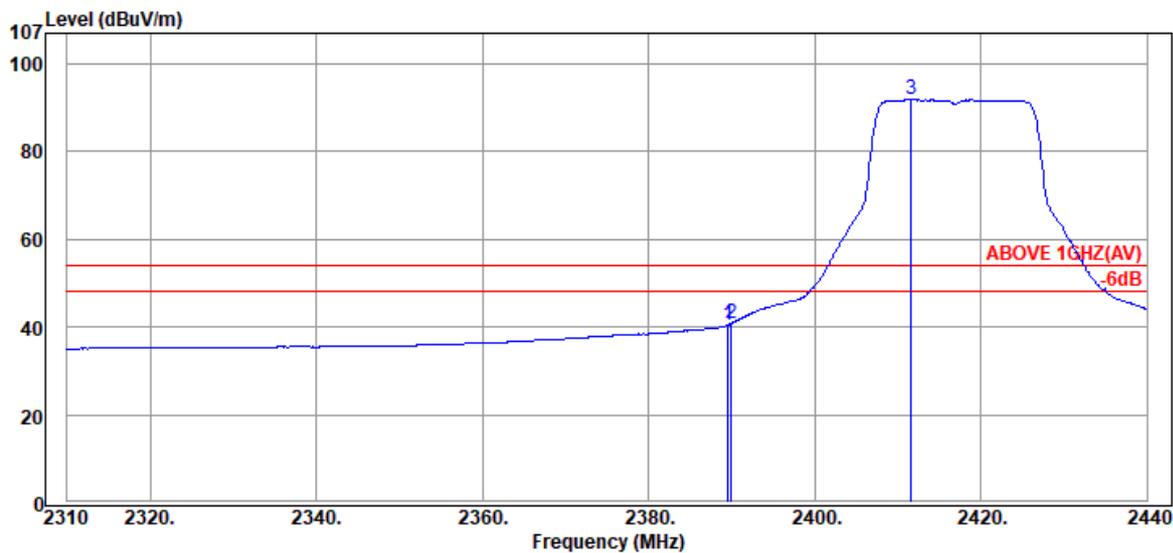

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	6.14	40.48	54.00	13.52	Average
2389.95	28.32	6.02	6.49	40.83	54.00	13.17	Average
@ 2411.66	28.42	6.05	57.33	91.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

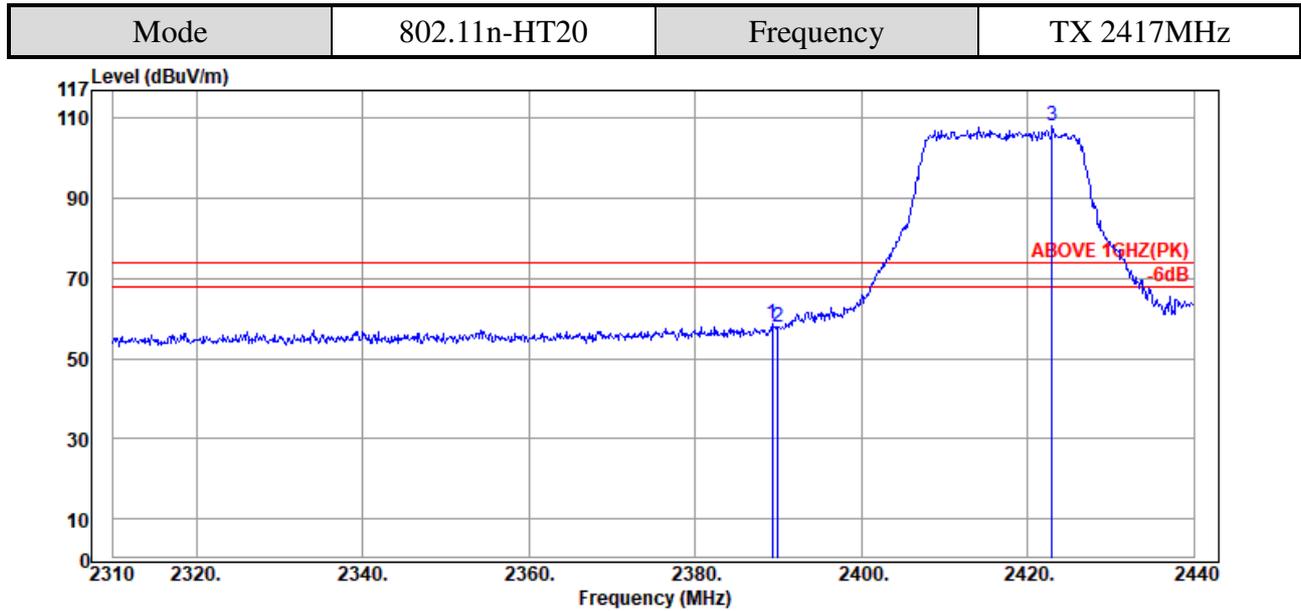

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.30	28.31	6.02	24.22	58.55	74.00	15.45	Peak
2389.95	28.32	6.02	23.47	57.81	74.00	16.19	Peak
@ 2422.97	28.45	6.06	73.65	108.16	---	---	Peak

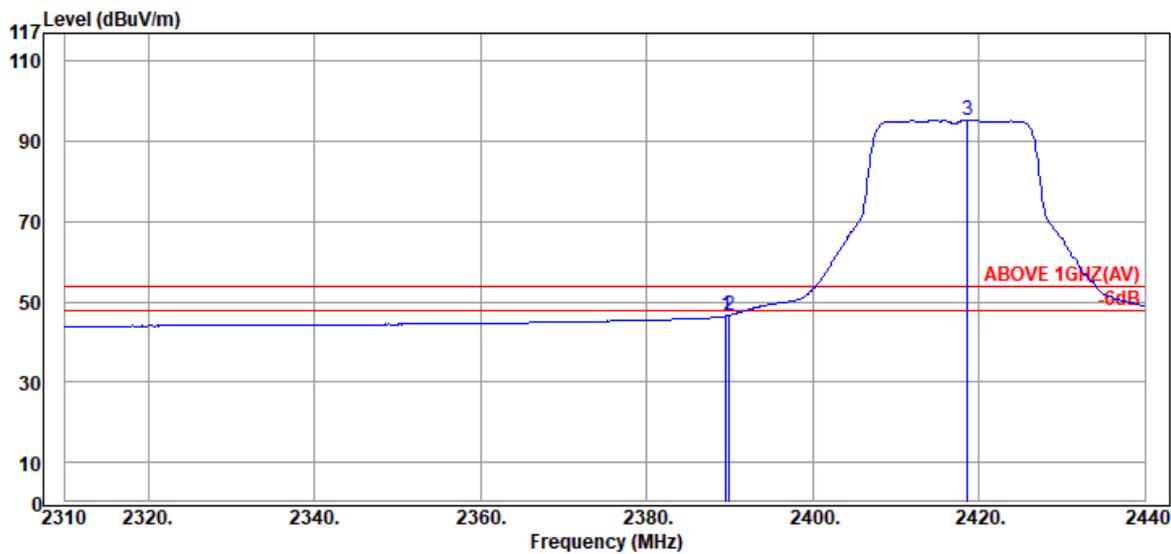


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	12.14	46.48	54.00	7.52	Average
2389.95	28.32	6.02	12.33	46.67	54.00	7.33	Average
@ 2418.68	28.44	6.06	60.81	95.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

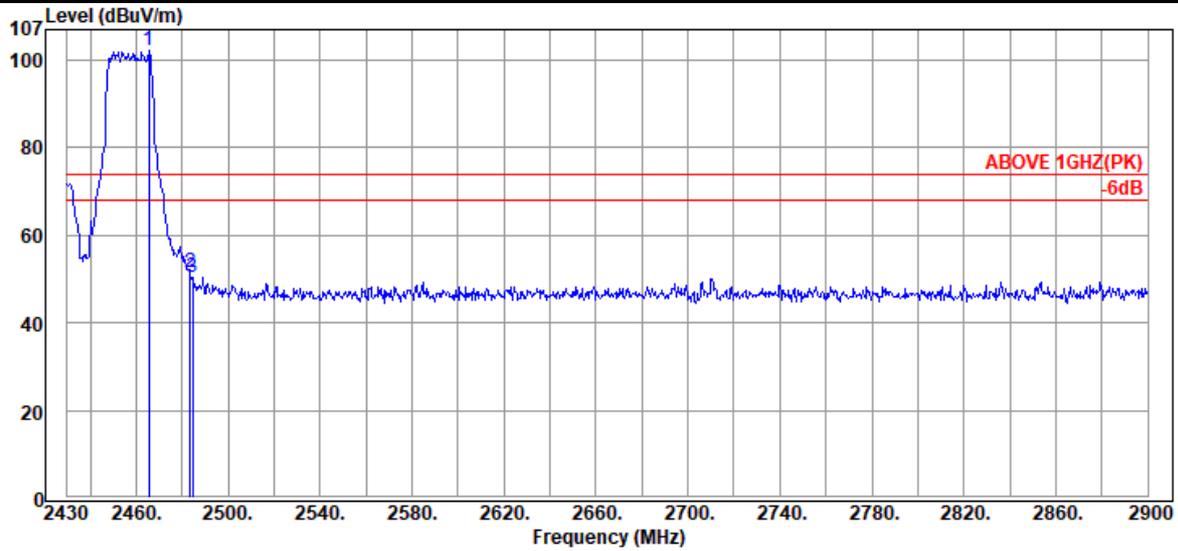

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.72	28.59	6.11	67.66	102.36	---	---	Peak
2483.58	28.70	6.13	16.55	51.38	74.00	22.62	Peak
2484.52	28.71	6.13	15.58	50.42	74.00	23.58	Peak

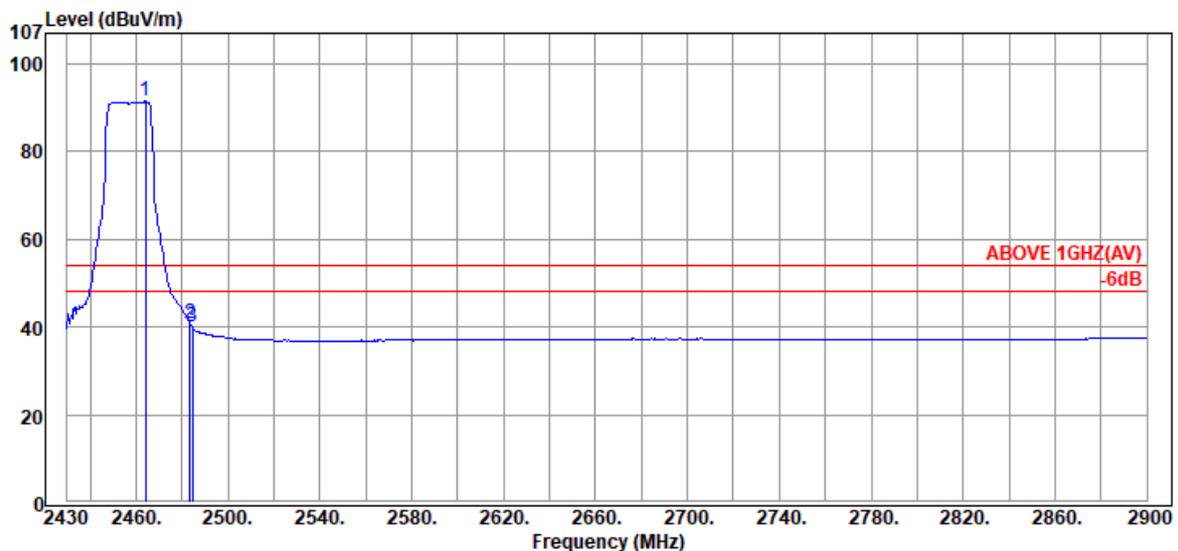


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.31	28.59	6.11	56.70	91.40	---	---	Average
2483.58	28.70	6.13	5.92	40.75	54.00	13.25	Average
2484.52	28.71	6.13	5.11	39.95	54.00	14.05	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

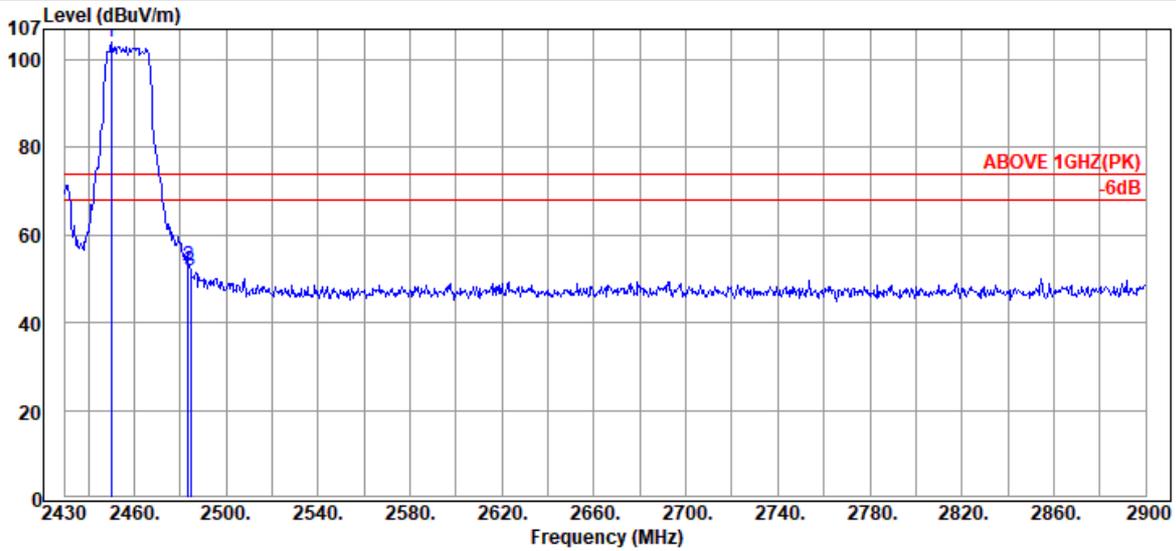

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.21	28.50	6.09	69.57	104.16	---	---	Peak
2483.58	28.70	6.13	18.13	52.96	74.00	21.04	Peak
2484.52	28.71	6.13	16.91	51.75	74.00	22.25	Peak

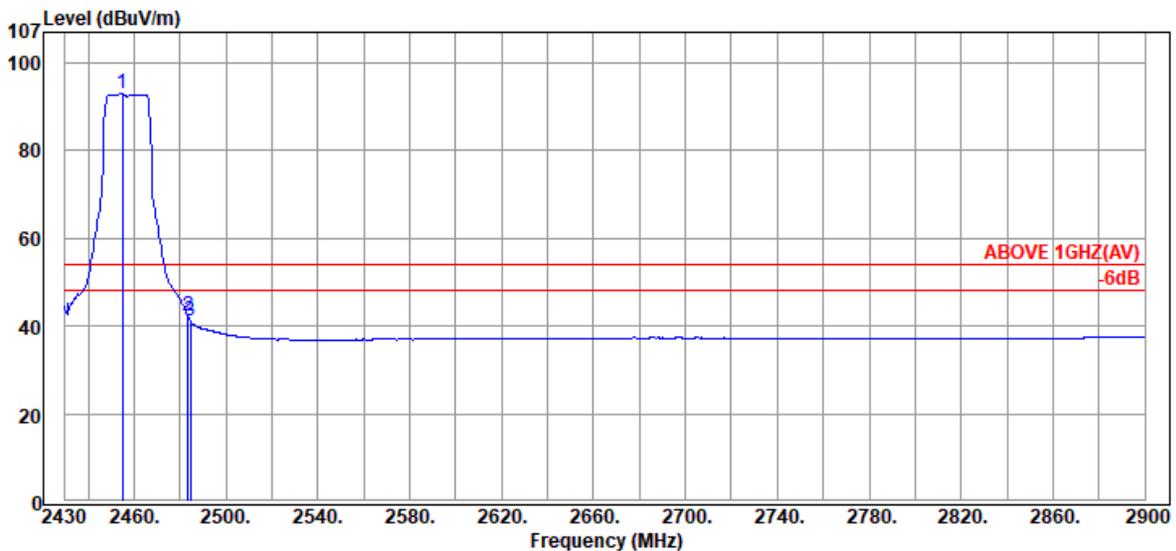


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.91	28.53	6.10	58.22	92.85	---	---	Average
2483.58	28.70	6.13	7.49	42.32	54.00	11.68	Average
2484.52	28.71	6.13	6.46	41.30	54.00	12.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

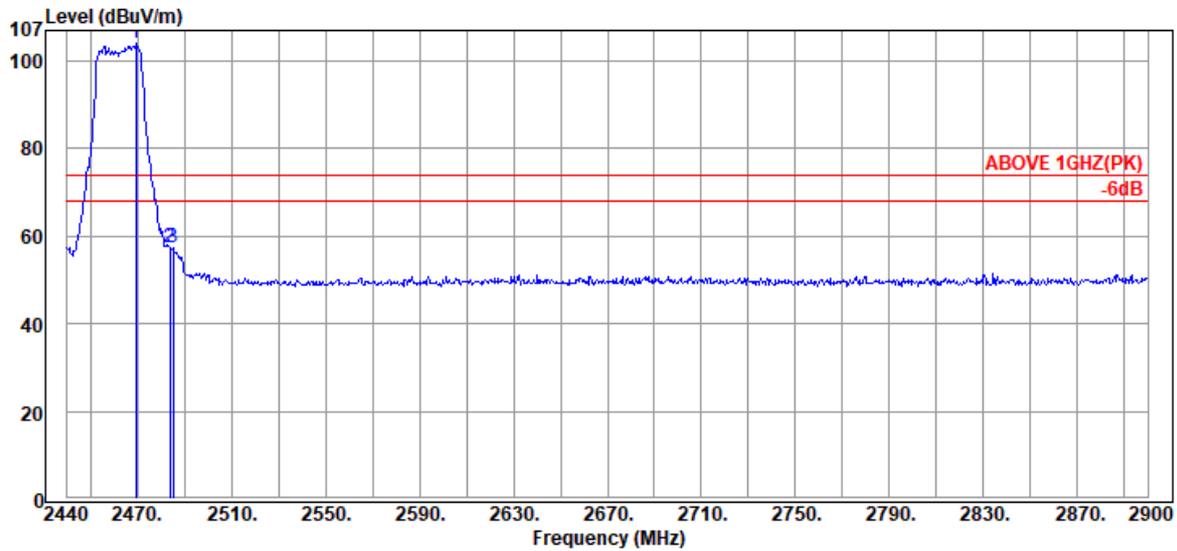

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.44	28.62	6.12	69.38	104.12	---	---	Peak
2483.70	28.70	6.13	22.61	57.44	74.00	16.56	Peak
2485.08	28.71	6.13	22.54	57.38	74.00	16.62	Peak

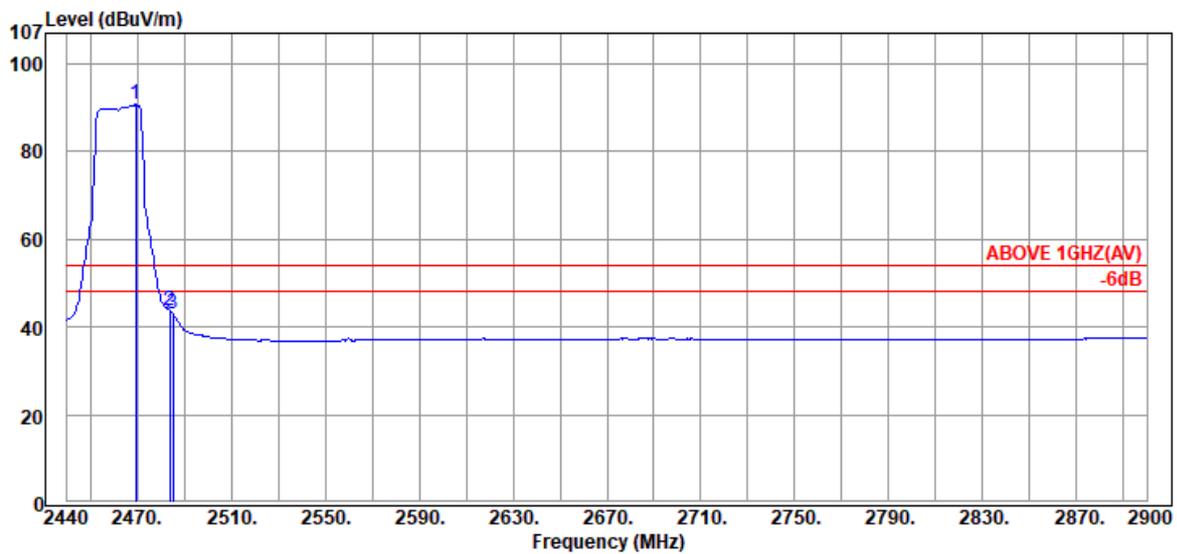

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.44	28.62	6.12	55.96	90.70	---	---	Average
2483.70	28.70	6.13	9.02	43.85	54.00	10.15	Average
2485.08	28.71	6.13	8.22	43.06	54.00	10.94	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

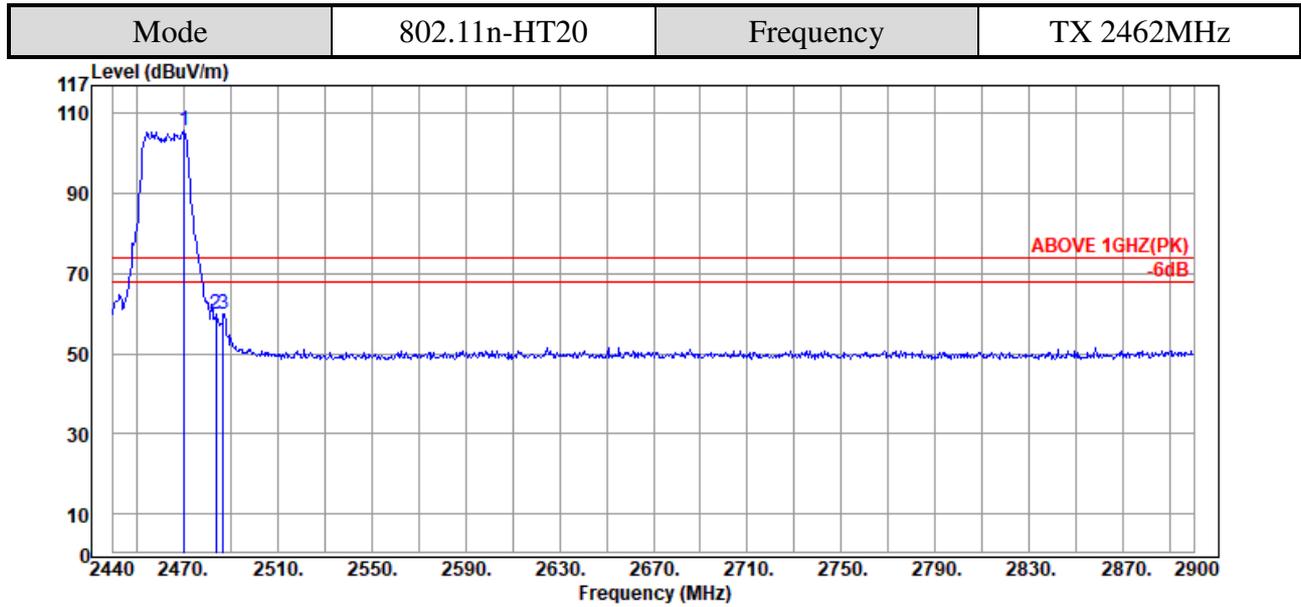

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.36	28.62	6.12	71.19	105.93	---	---	Peak
2483.70	28.70	6.13	25.02	59.85	74.00	14.15	Peak
2486.92	28.72	6.14	25.07	59.93	74.00	14.07	Peak

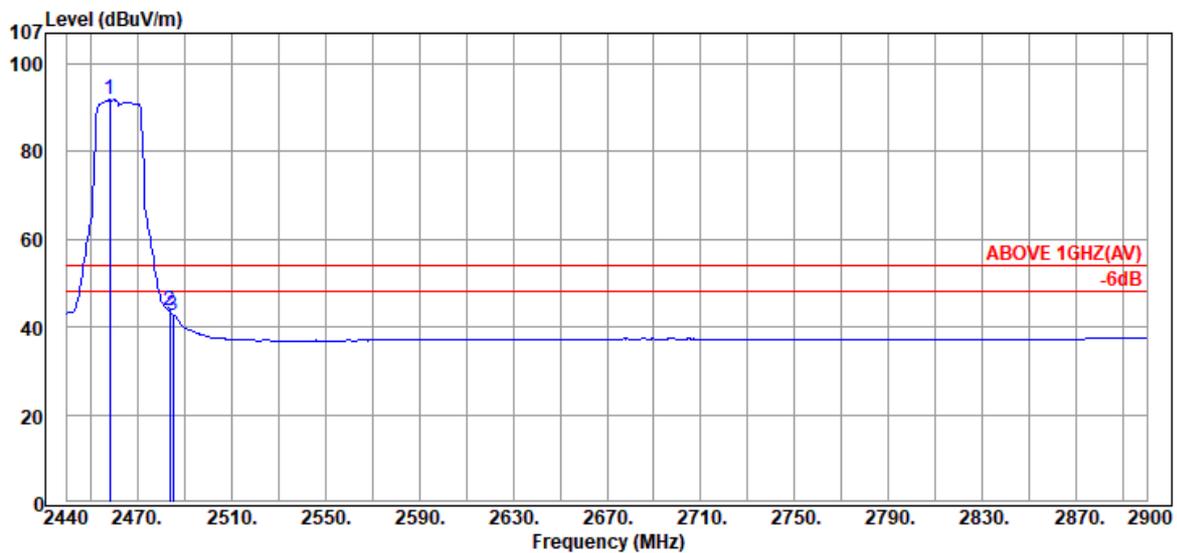

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.40	28.55	6.10	57.19	91.84	---	---	Average
2483.70	28.70	6.13	8.81	43.64	54.00	10.36	Average
2485.08	28.71	6.13	7.96	42.80	54.00	11.20	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

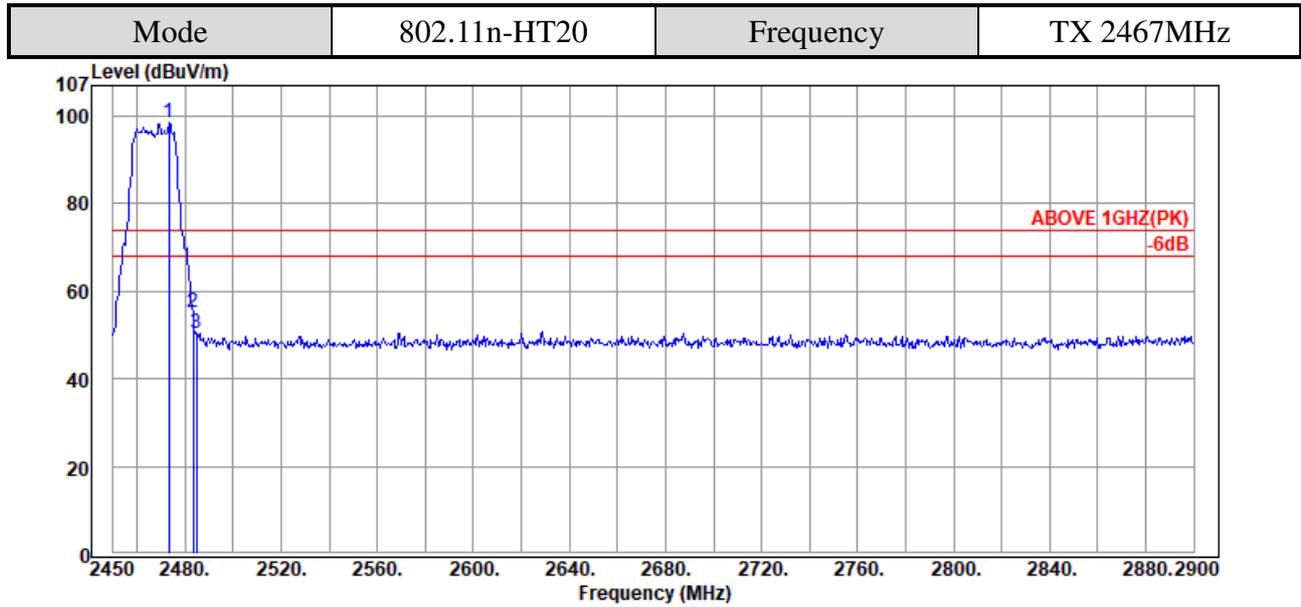

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.40	28.64	6.12	63.62	98.38	---	---	Peak
2483.30	28.70	6.13	20.28	55.11	74.00	18.89	Peak
2484.65	28.71	6.13	15.71	50.55	74.00	23.45	Peak

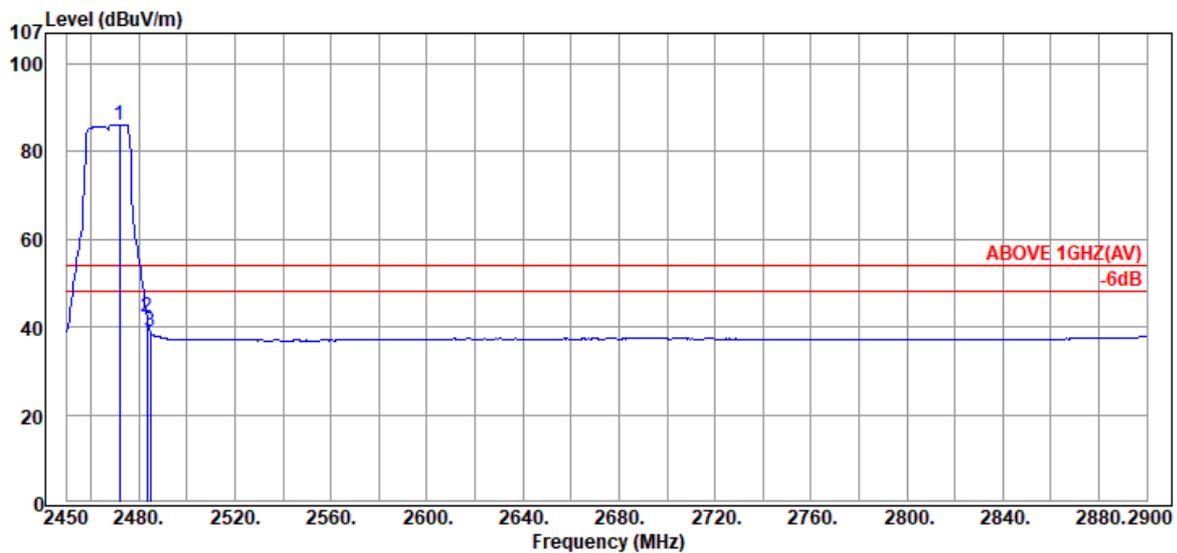


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.05	28.63	6.12	51.42	86.17	---	---	Average
2483.30	28.70	6.13	7.31	42.14	54.00	11.86	Average
2484.65	28.71	6.13	4.06	38.90	54.00	15.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

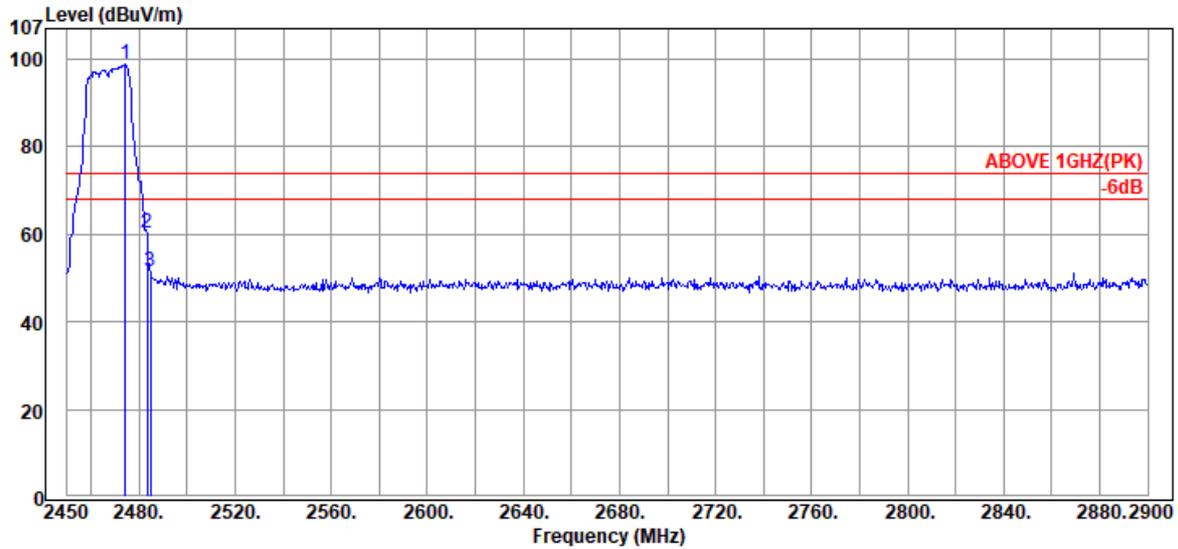

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.30	28.65	6.12	64.11	98.88	---	---	Peak
2483.30	28.70	6.13	25.60	60.43	74.00	13.57	Peak
2484.65	28.71	6.13	16.76	51.60	74.00	22.40	Peak

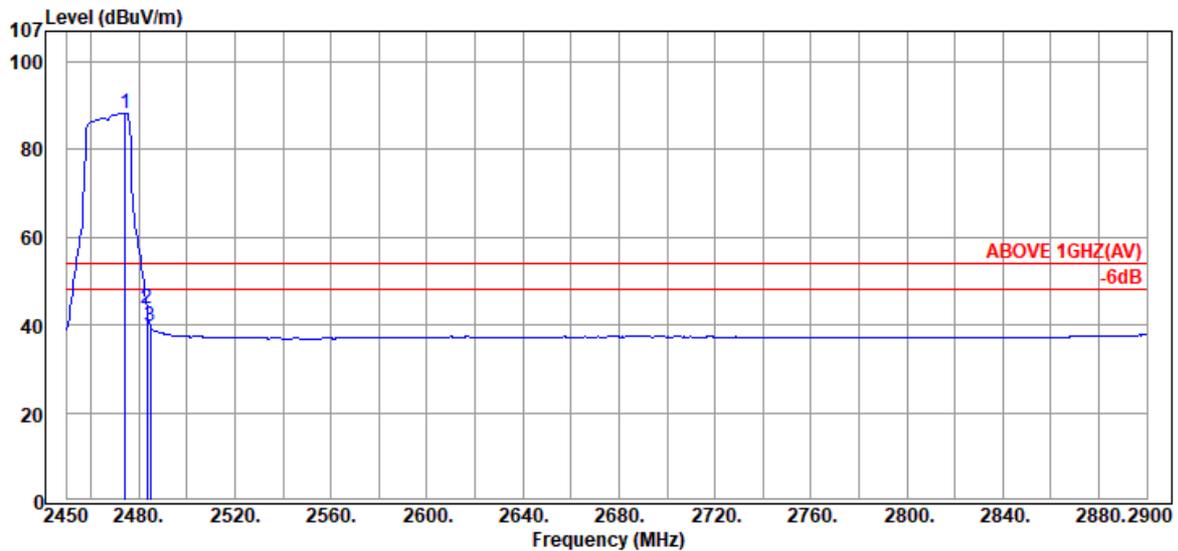


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.30	28.65	6.12	53.55	88.32	---	---	Average
2483.30	28.70	6.13	9.00	43.83	54.00	10.17	Average
2484.65	28.71	6.13	5.03	39.87	54.00	14.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

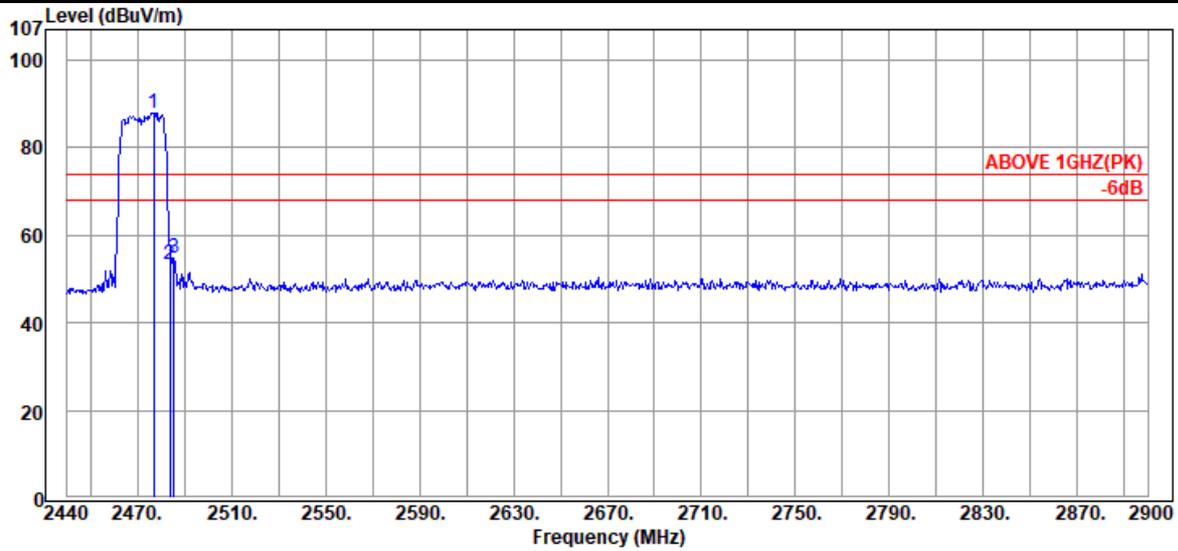

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.80	28.66	6.12	53.27	88.05	---	---	Peak
2483.70	28.70	6.13	18.34	53.17	74.00	20.83	Peak
2485.54	28.71	6.13	19.77	54.61	74.00	19.39	Peak

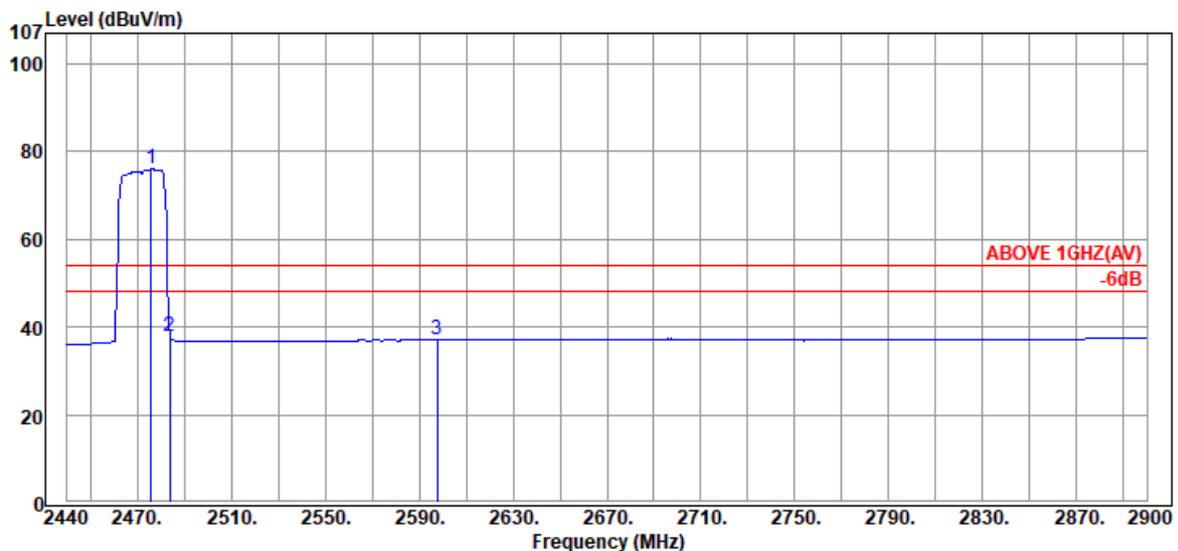


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.88	28.66	6.12	41.28	76.06	---	---	Average
2483.70	28.70	6.13	2.88	37.71	54.00	16.29	Average
2597.78	29.09	6.28	1.81	37.18	54.00	16.82	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

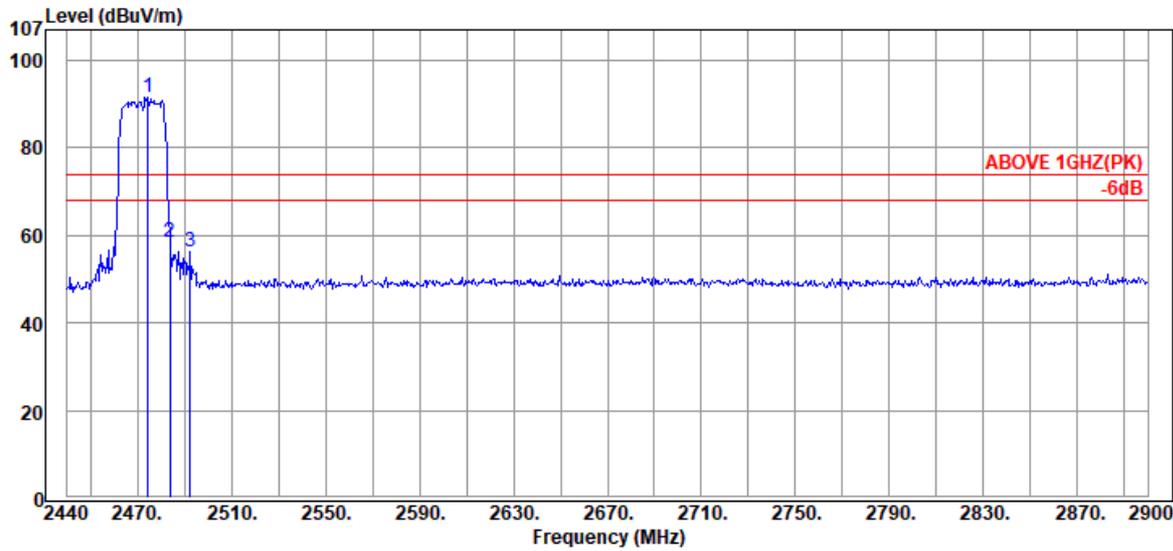

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.50	28.65	6.12	56.78	91.55	---	---	Peak
2483.70	28.70	6.13	23.54	58.37	74.00	15.63	Peak
2492.44	28.75	6.14	21.49	56.38	74.00	17.62	Peak

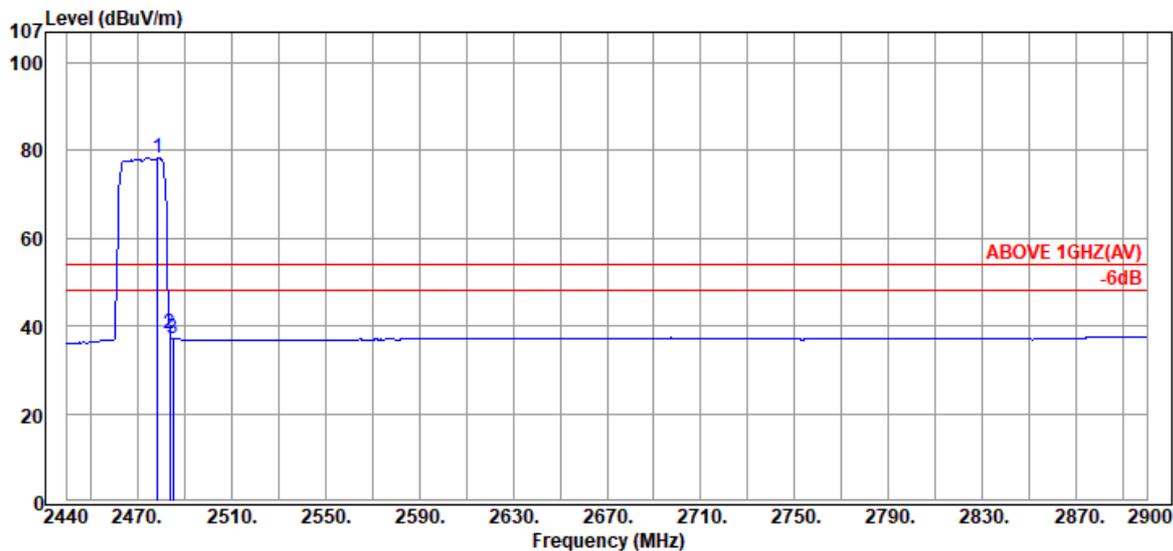


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.64	28.67	6.13	43.38	78.18	---	---	Average
2483.70	28.70	6.13	3.31	38.14	54.00	15.86	Average
2485.08	28.71	6.13	2.43	37.27	54.00	16.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

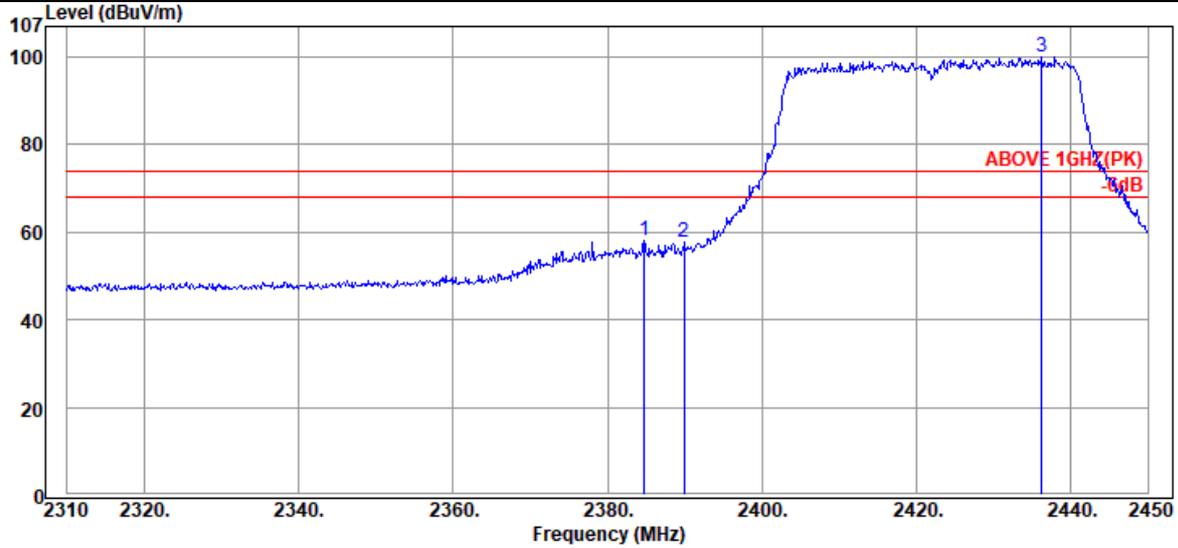

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.76	28.28	6.02	23.84	58.14	74.00	15.86	Peak
2389.94	28.32	6.02	23.21	57.55	74.00	16.45	Peak
@ 2436.28	28.47	6.08	65.58	100.13	---	---	Peak

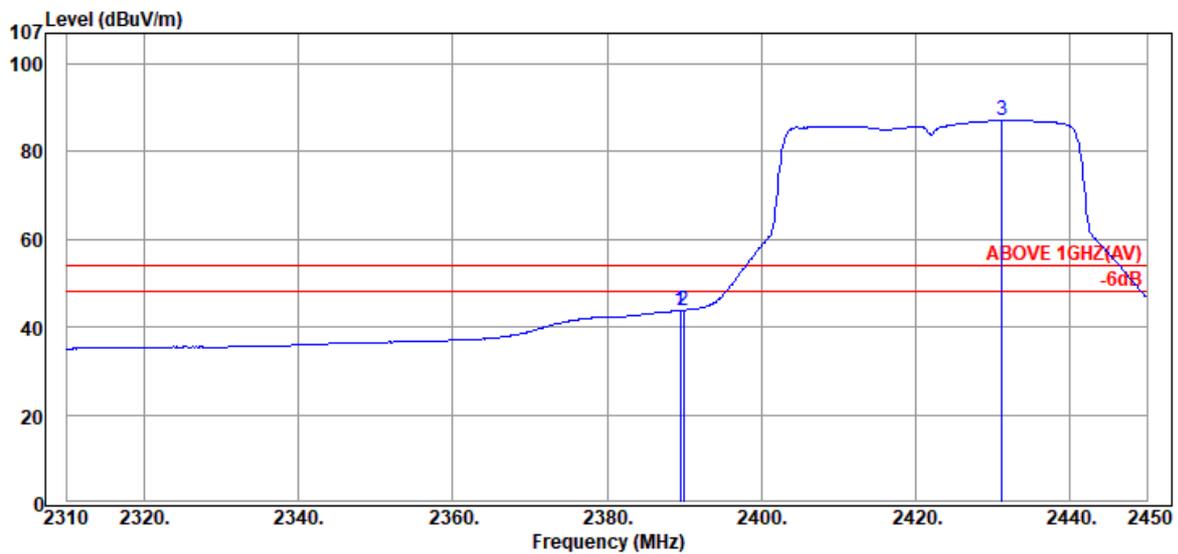

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	9.47	43.81	54.00	10.19	Average
2389.94	28.32	6.02	9.56	43.90	54.00	10.10	Average
@ 2431.24	28.46	6.07	52.70	87.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

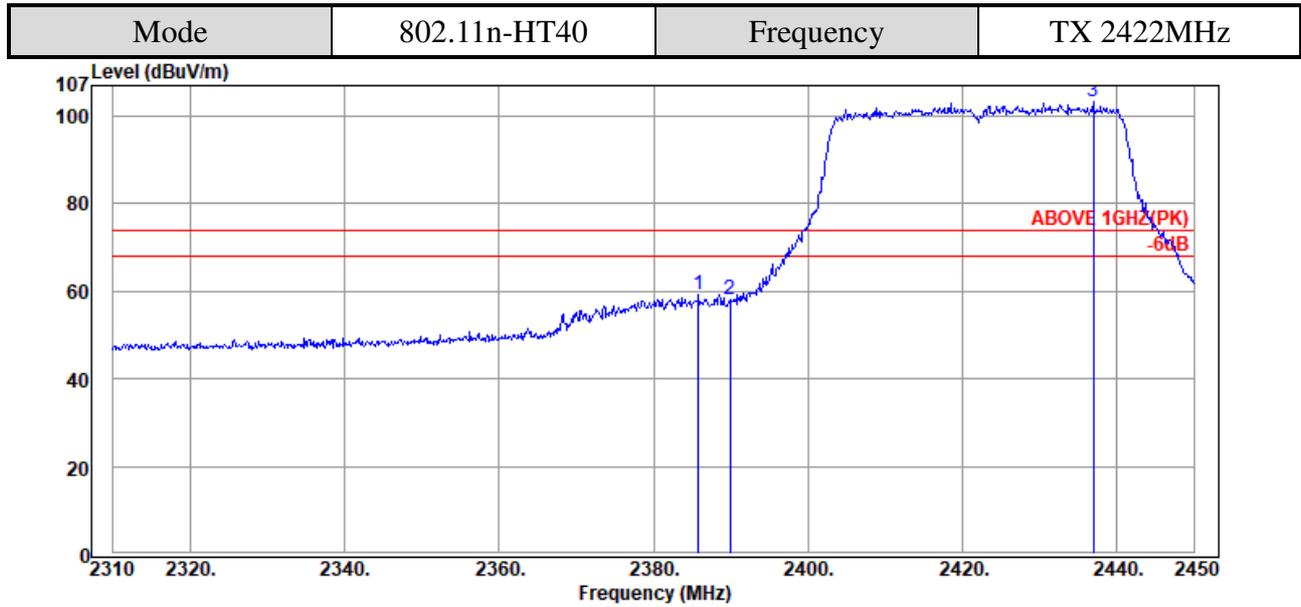

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.88	28.29	6.02	24.94	59.25	74.00	14.75	Peak
2389.94	28.32	6.02	23.58	57.92	74.00	16.08	Peak
@ 2436.98	28.47	6.08	68.87	103.42	---	---	Peak

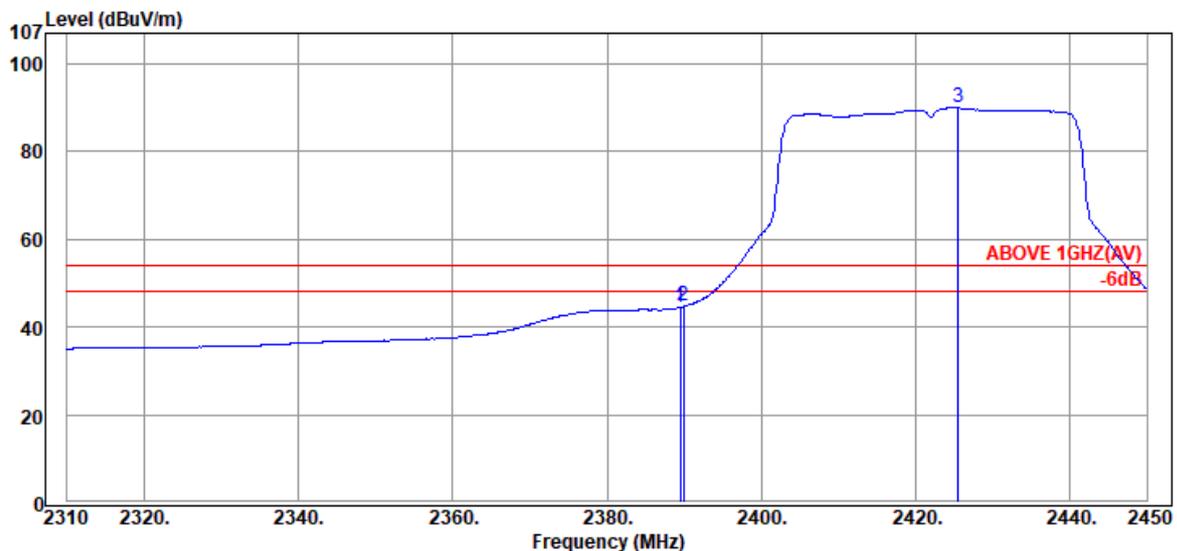

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	10.23	44.57	54.00	9.43	Average
2389.94	28.32	6.02	10.34	44.68	54.00	9.32	Average
@ 2425.50	28.45	6.07	55.48	90.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

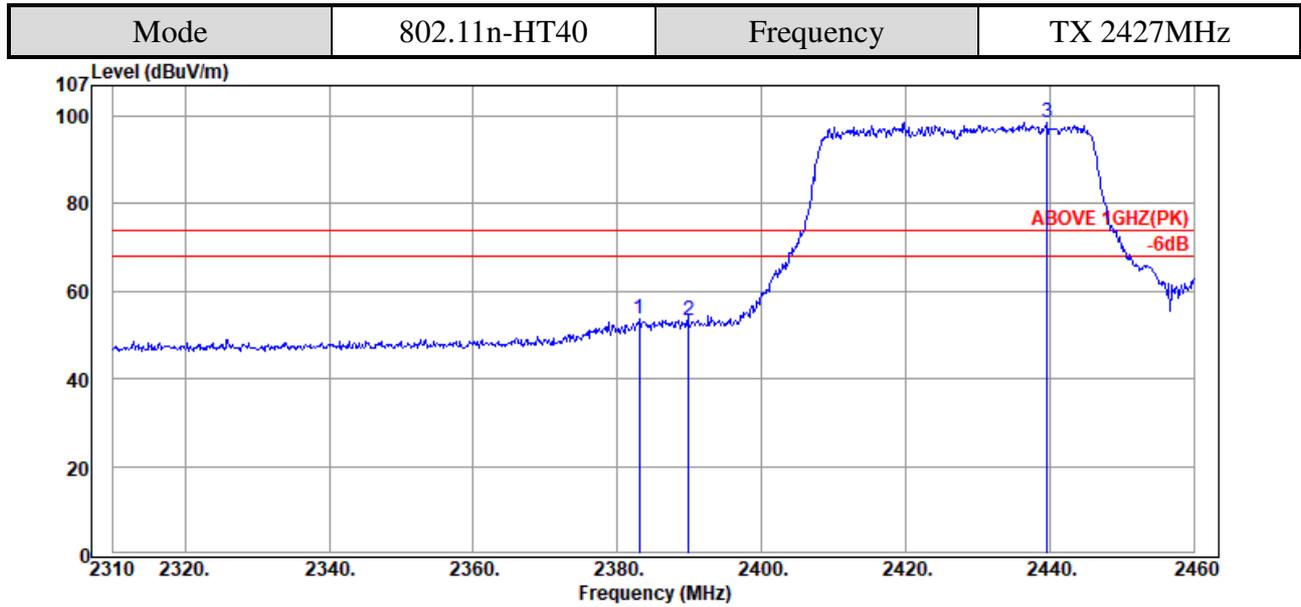

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.05	28.26	6.02	19.26	53.54	74.00	20.46	Peak
2389.95	28.32	6.02	18.97	53.31	74.00	20.69	Peak
@ 2439.60	28.48	6.08	63.86	98.42	---	---	Peak

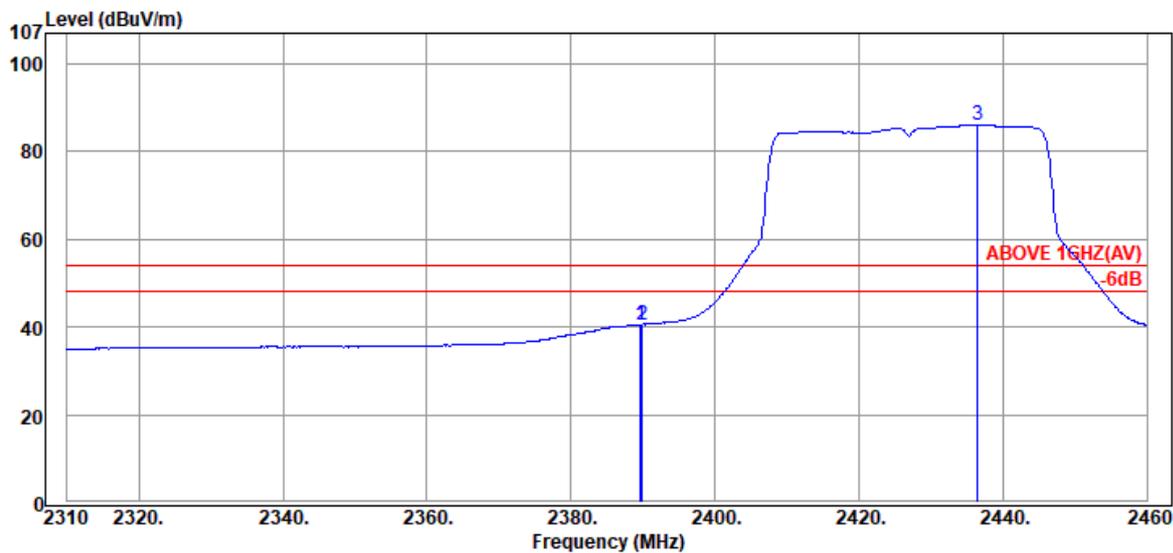

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.65	28.32	6.02	6.22	40.56	54.00	13.44	Average
2389.95	28.32	6.02	6.27	40.61	54.00	13.39	Average
@ 2436.45	28.47	6.08	51.44	85.99	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

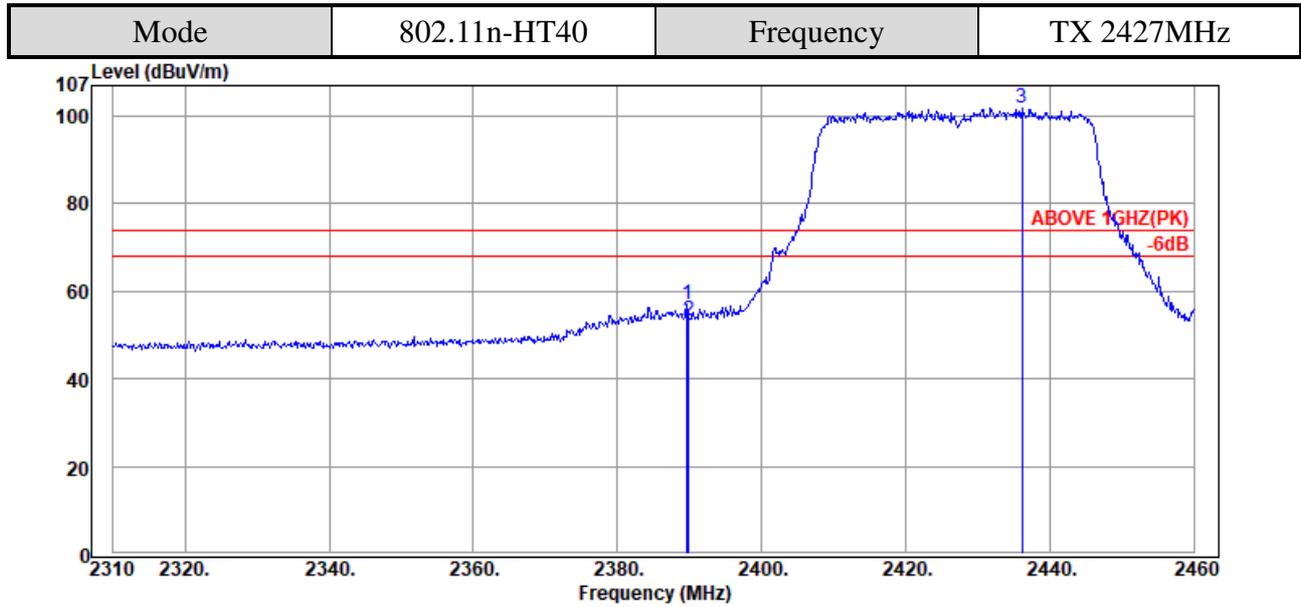

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.65	28.32	6.02	22.72	57.06	74.00	16.94	Peak
2389.95	28.32	6.02	19.06	53.40	74.00	20.60	Peak
@ 2436.15	28.47	6.08	67.37	101.92	---	---	Peak

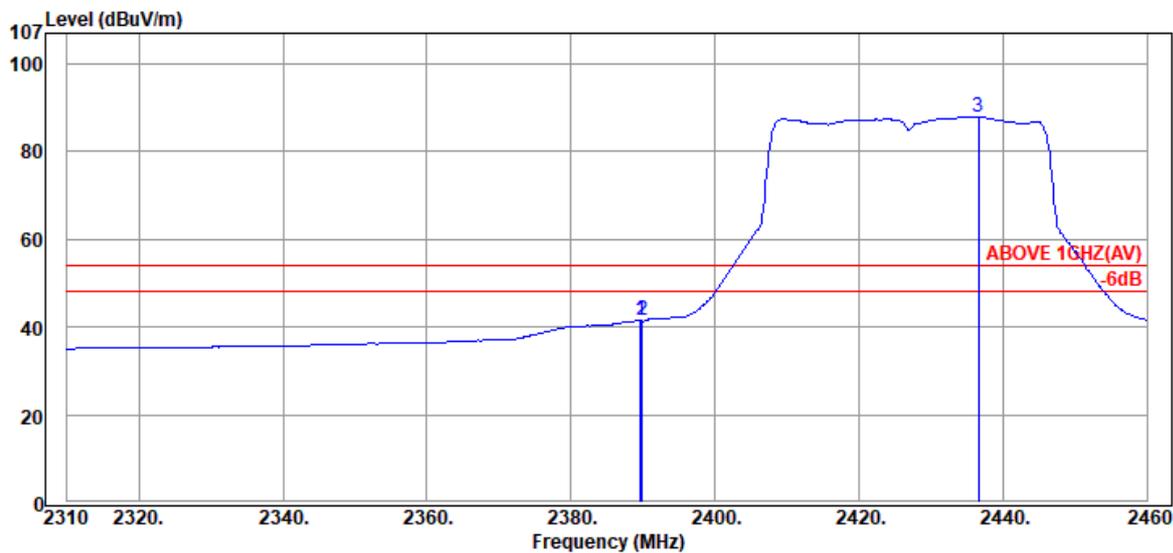


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.65	28.32	6.02	7.27	41.61	54.00	12.39	Average
2389.95	28.32	6.02	7.35	41.69	54.00	12.31	Average
@ 2436.60	28.47	6.08	53.36	87.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

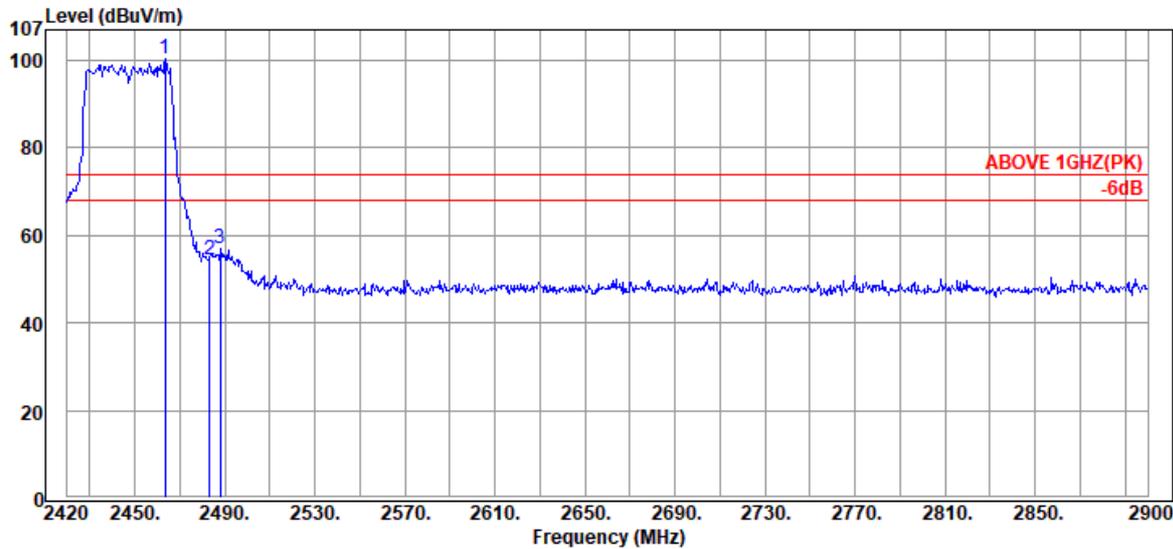

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.68	28.58	6.11	65.68	100.37	---	---	Peak
2483.36	28.70	6.13	19.41	54.24	74.00	19.76	Peak
2488.16	28.73	6.14	22.23	57.10	74.00	16.90	Peak

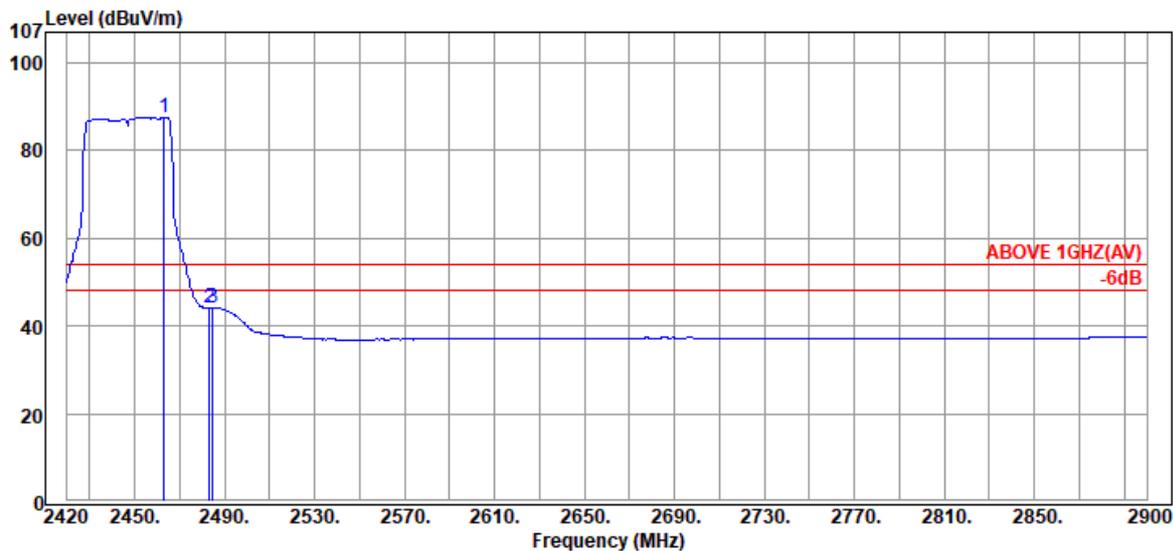


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.20	28.58	6.11	52.81	87.50	---	---	Average
2483.36	28.70	6.13	9.45	44.28	54.00	9.72	Average
2484.80	28.71	6.13	9.39	44.23	54.00	9.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

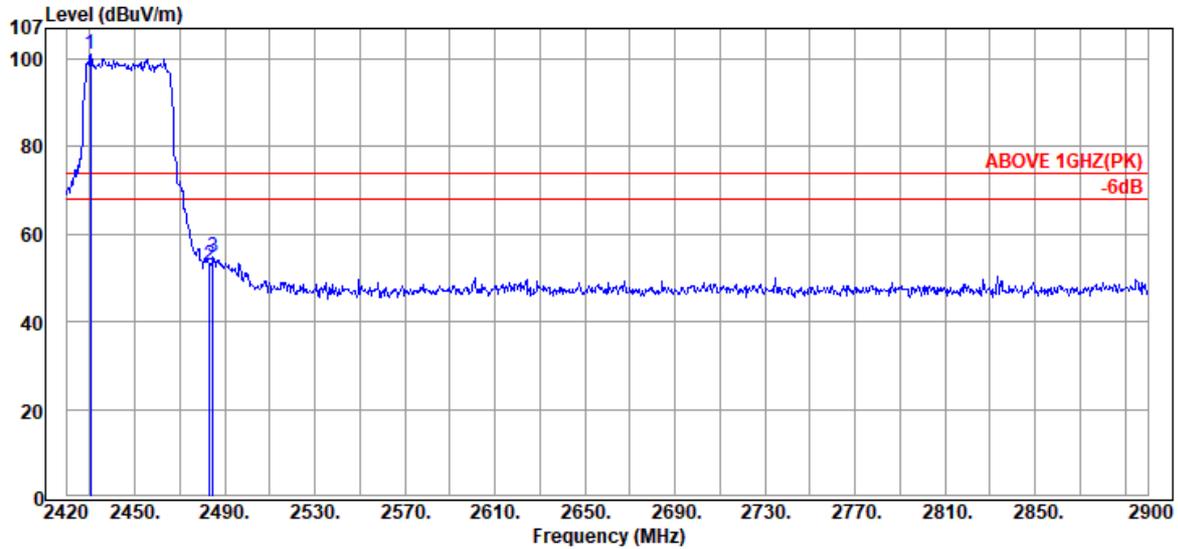

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2430.56	28.46	6.07	66.52	101.05	---	---	Peak
2483.36	28.70	6.13	18.04	52.87	74.00	21.13	Peak
2484.80	28.71	6.13	19.85	54.69	74.00	19.31	Peak

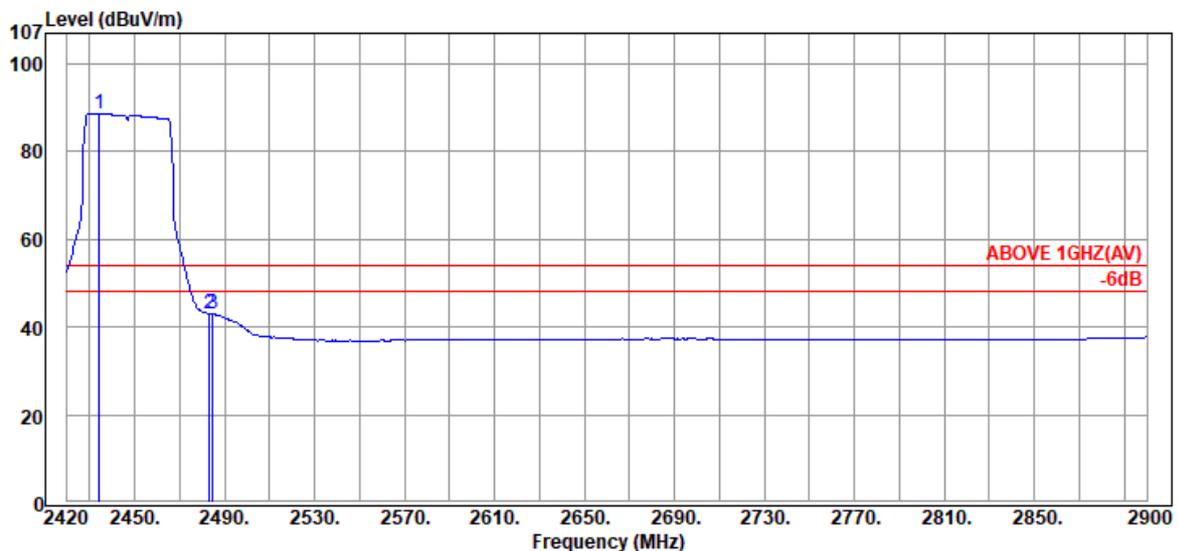


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2434.40	28.47	6.08	54.11	88.66	---	---	Average
2483.36	28.70	6.13	8.35	43.18	54.00	10.82	Average
2484.80	28.71	6.13	8.18	43.02	54.00	10.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

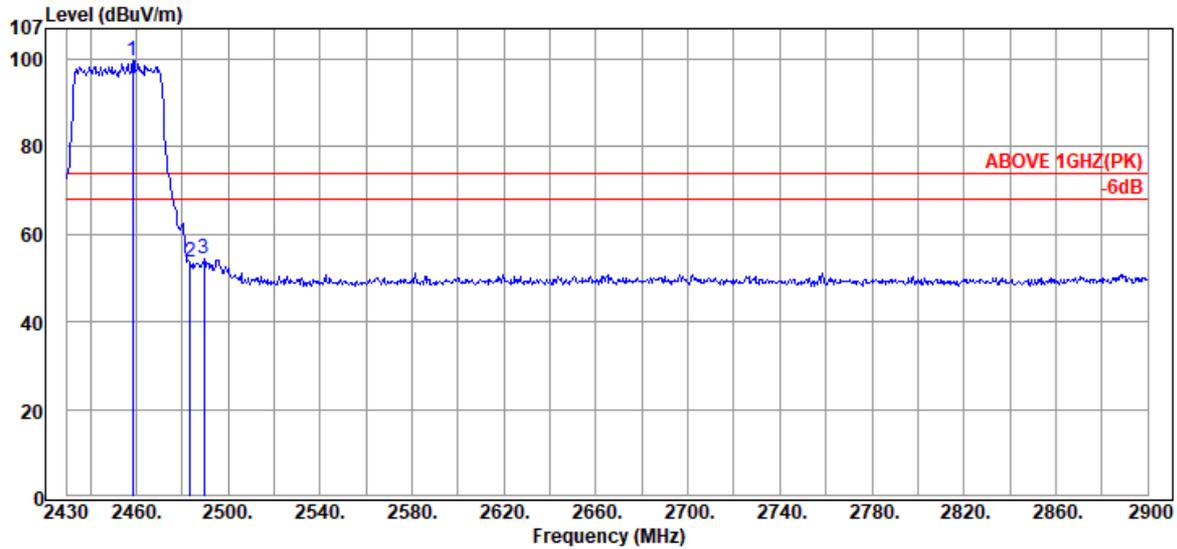

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.67	28.55	6.10	64.98	99.63	---	---	Peak
2483.58	28.70	6.13	18.86	53.69	74.00	20.31	Peak
2489.69	28.74	6.14	19.47	54.35	74.00	19.65	Peak

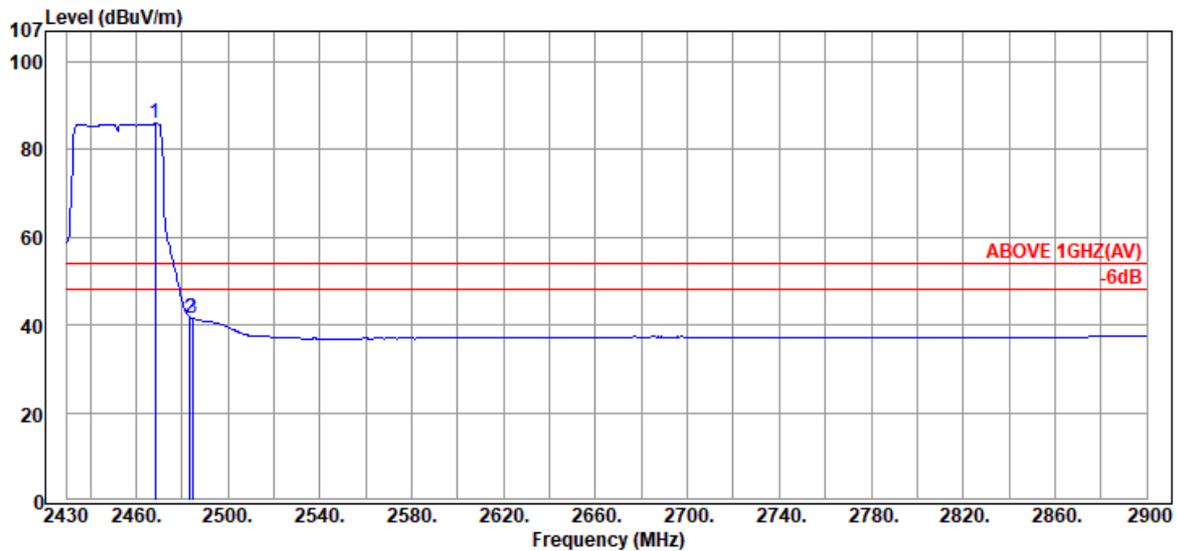


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.54	28.61	6.11	51.22	85.94	---	---	Average
2483.58	28.70	6.13	6.86	41.69	54.00	12.31	Average
2484.52	28.71	6.13	6.72	41.56	54.00	12.44	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

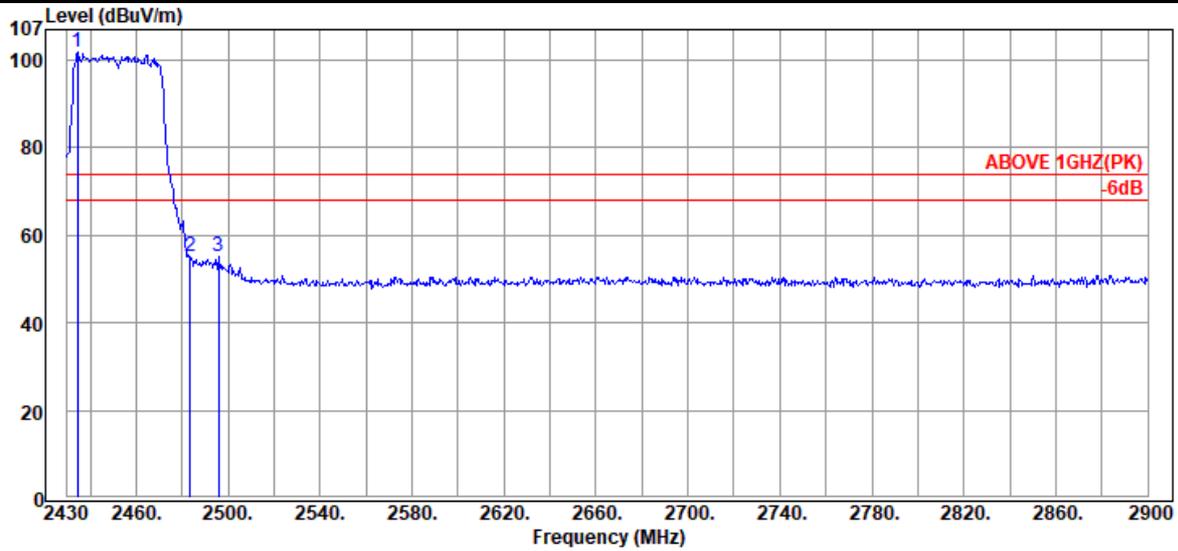

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2434.70	28.47	6.08	67.46	102.01	---	---	Peak
2483.58	28.70	6.13	20.20	55.03	74.00	18.97	Peak
2495.80	28.77	6.15	20.39	55.31	74.00	18.69	Peak

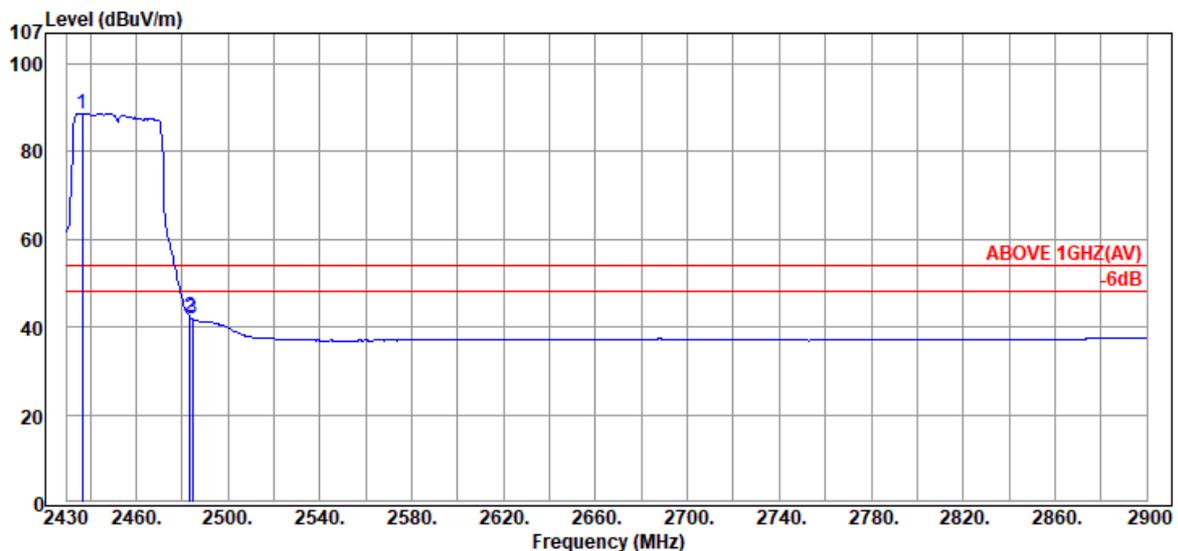


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2436.58	28.47	6.08	54.15	88.70	---	---	Average
2483.58	28.70	6.13	7.39	42.22	54.00	11.78	Average
2484.52	28.71	6.13	7.01	41.85	54.00	12.15	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

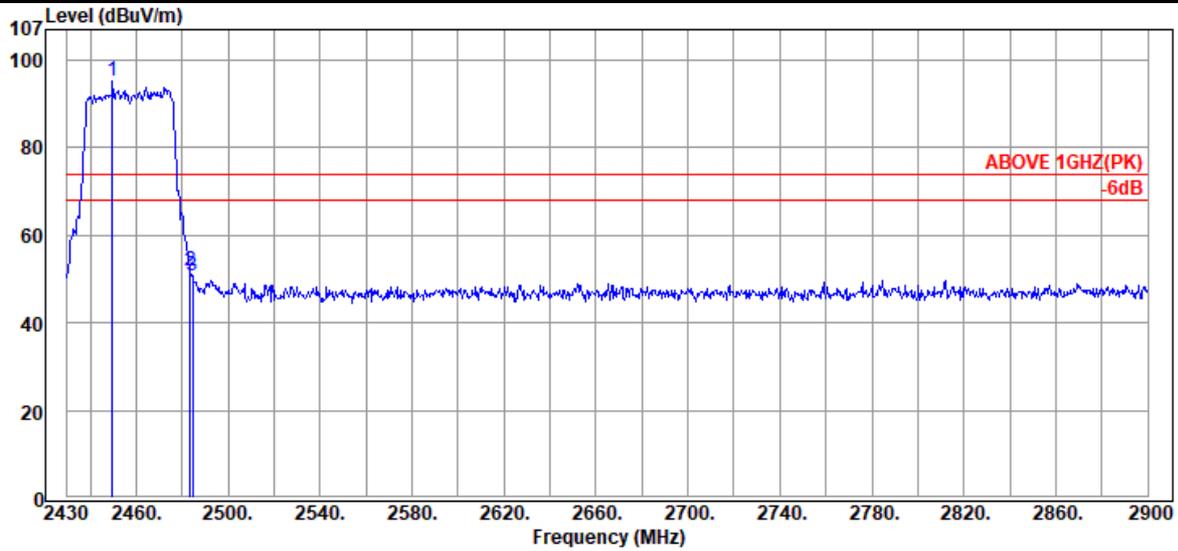

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.74	28.50	6.09	60.52	95.11	---	---	Peak
2483.58	28.70	6.13	17.16	51.99	74.00	22.01	Peak
2484.52	28.71	6.13	15.89	50.73	74.00	23.27	Peak

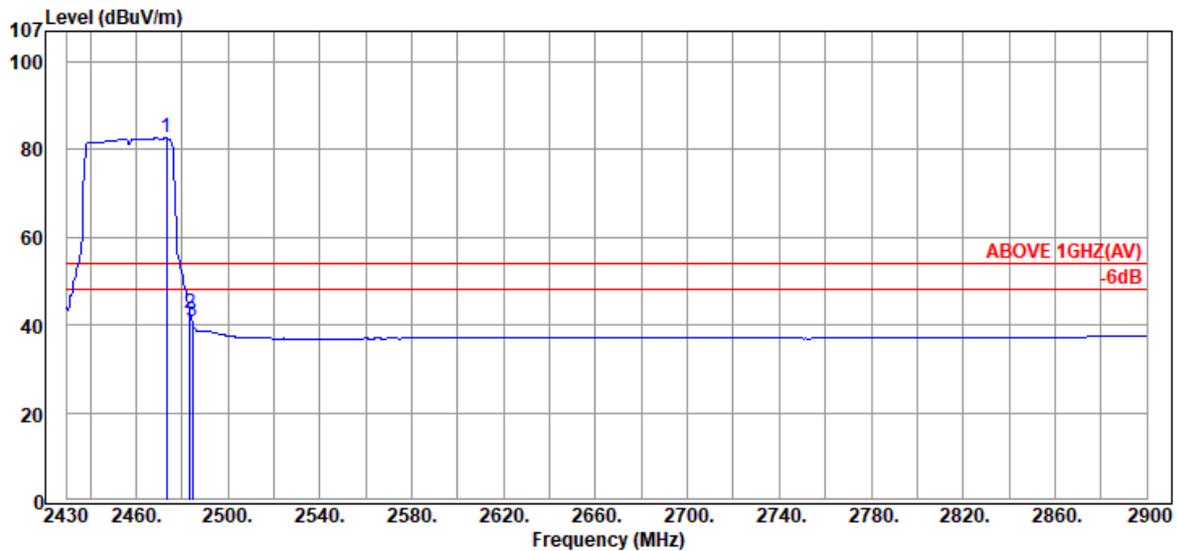


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.24	28.64	6.12	47.83	82.59	---	---	Average
2483.58	28.70	6.13	7.74	42.57	54.00	11.43	Average
2484.52	28.71	6.13	5.82	40.66	54.00	13.34	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

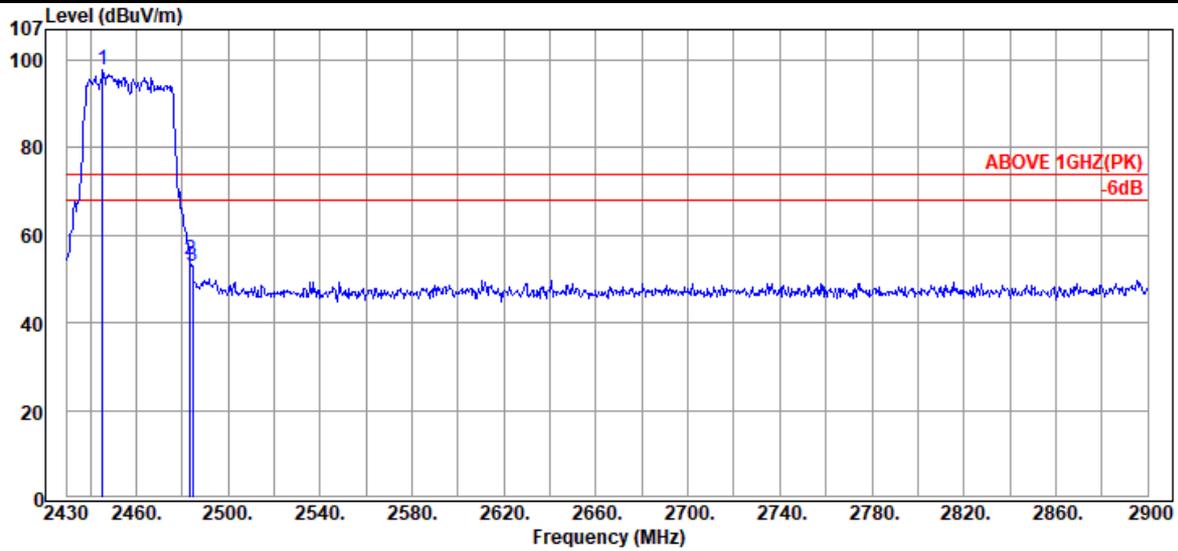

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.51	28.49	6.09	63.13	97.71	---	---	Peak
2483.58	28.70	6.13	19.63	54.46	74.00	19.54	Peak
2484.52	28.71	6.13	18.10	52.94	74.00	21.06	Peak

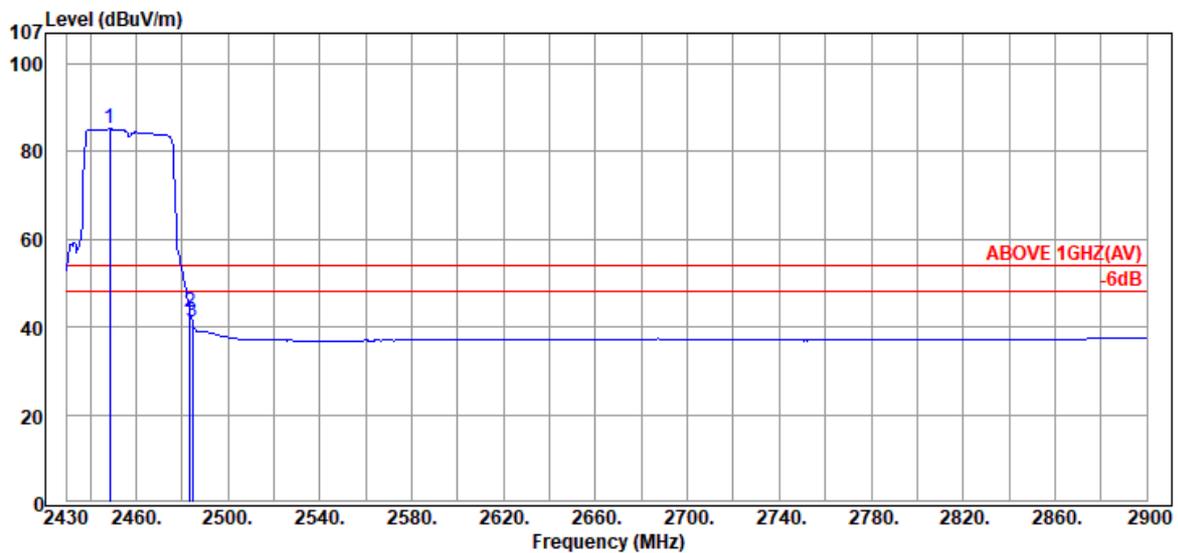


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.80	28.50	6.09	50.57	85.16	---	---	Average
2483.58	28.70	6.13	8.66	43.49	54.00	10.51	Average
2484.52	28.71	6.13	6.49	41.33	54.00	12.67	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

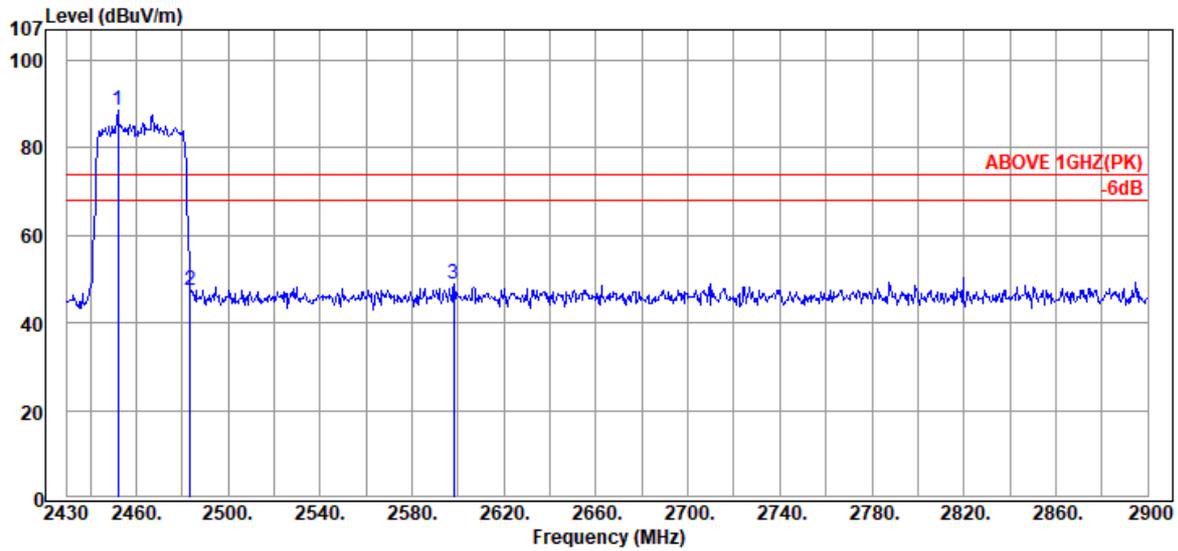

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.09	28.51	6.10	54.09	88.70	---	---	Peak
2483.58	28.70	6.13	12.78	47.61	74.00	26.39	Peak
2598.26	29.09	6.28	13.38	48.75	74.00	25.25	Peak

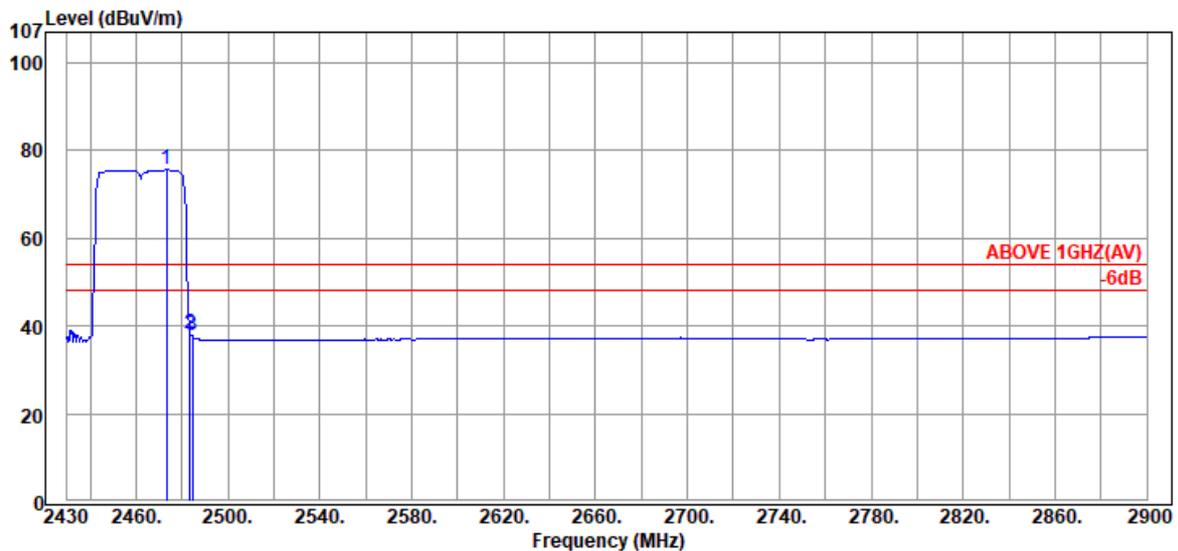


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.24	28.64	6.12	41.01	75.77	---	---	Average
2483.58	28.70	6.13	3.38	38.21	54.00	15.79	Average
2484.52	28.71	6.13	2.95	37.79	54.00	16.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

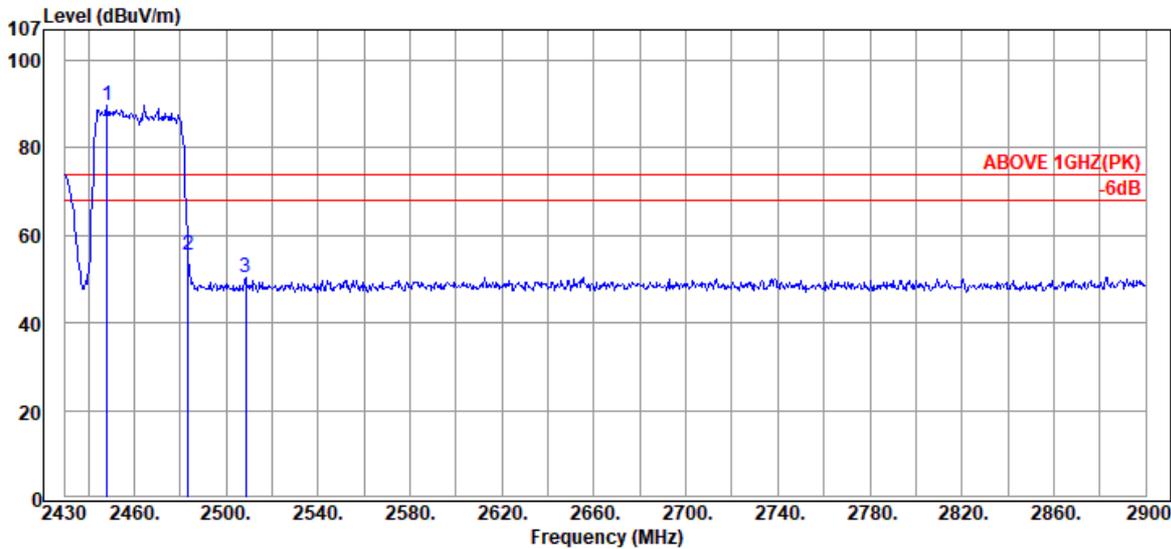

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.33	28.50	6.09	55.17	89.76	---	---	Peak
2483.58	28.70	6.13	20.68	55.51	74.00	18.49	Peak
2508.49	28.82	6.16	15.50	50.48	74.00	23.52	Peak

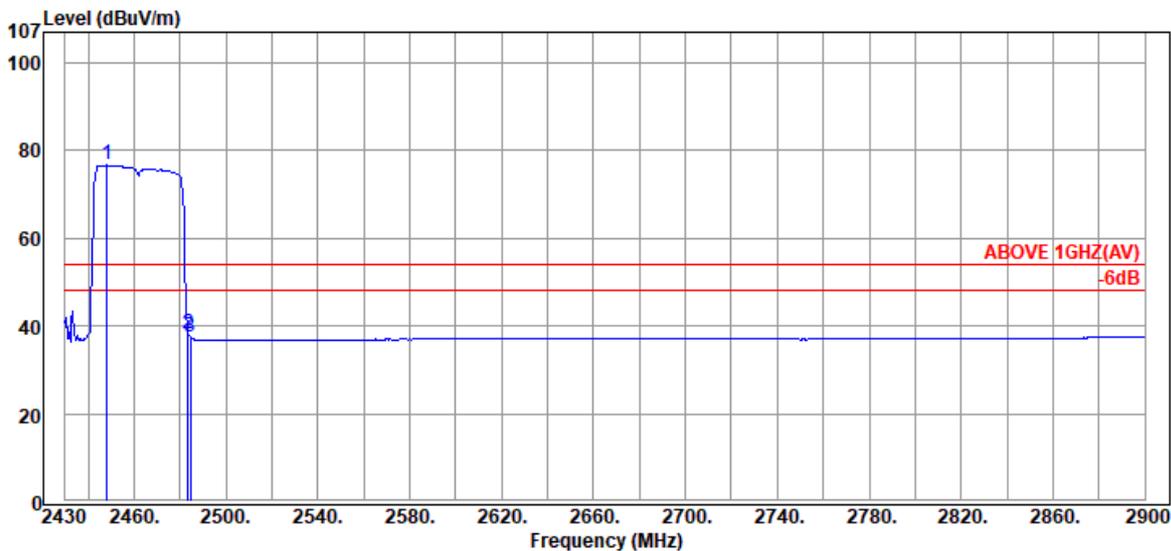


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.33	28.50	6.09	42.10	76.69	---	---	Average
2483.58	28.70	6.13	3.26	38.09	54.00	15.91	Average
2484.52	28.71	6.13	2.76	37.60	54.00	16.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

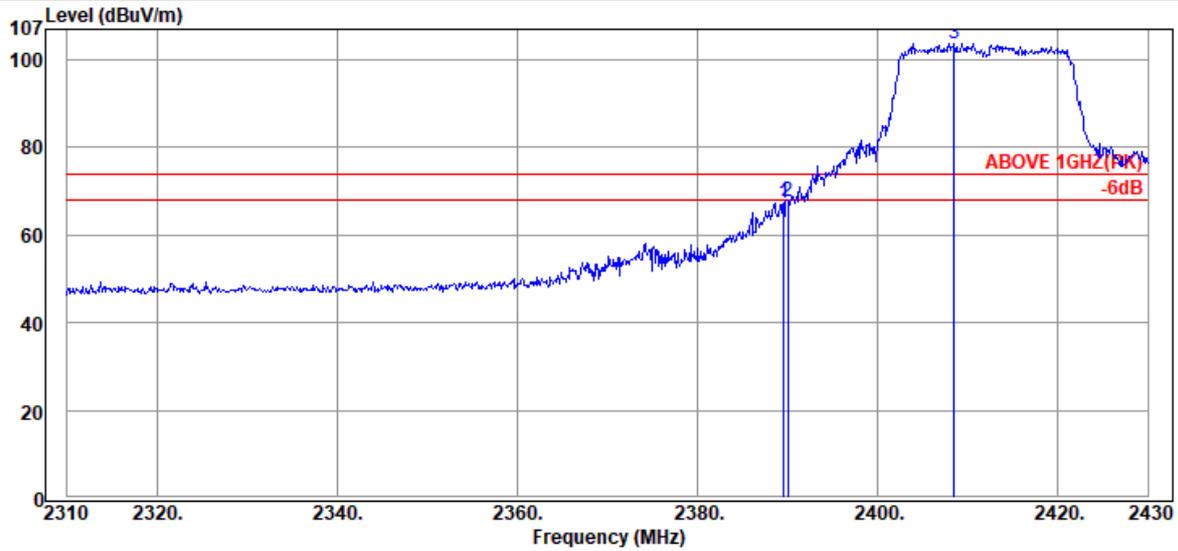

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	33.11	67.45	74.00	6.55	Peak
2390.04	28.32	6.03	33.12	67.47	74.00	6.53	Peak
@ 2408.52	28.42	6.05	69.40	103.87	---	---	Peak

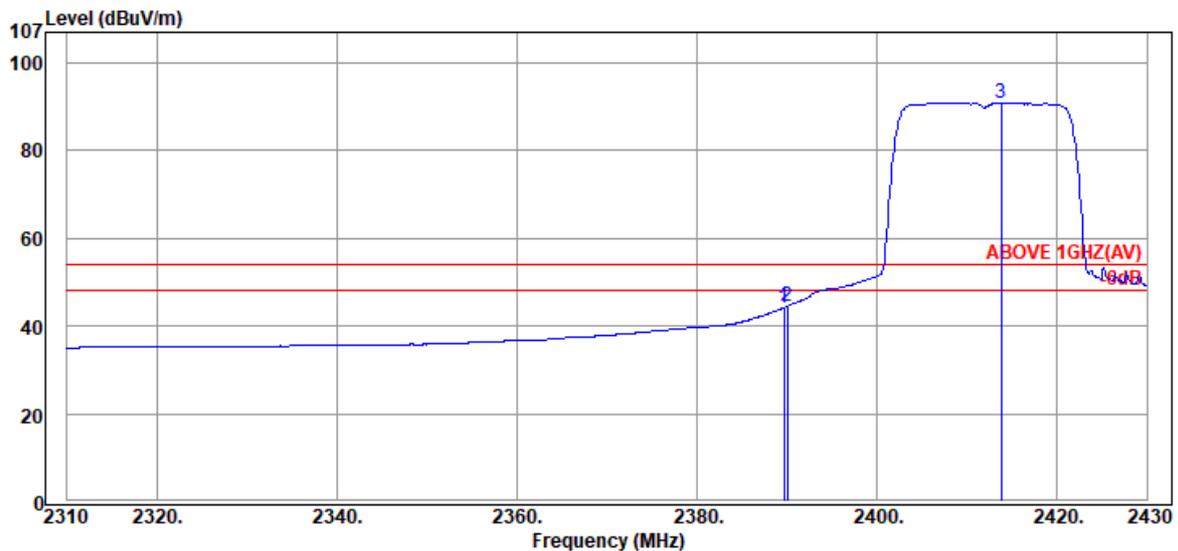

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	9.79	44.13	54.00	9.87	Average
2390.04	28.32	6.03	10.13	44.48	54.00	9.52	Average
@ 2413.80	28.43	6.05	56.45	90.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

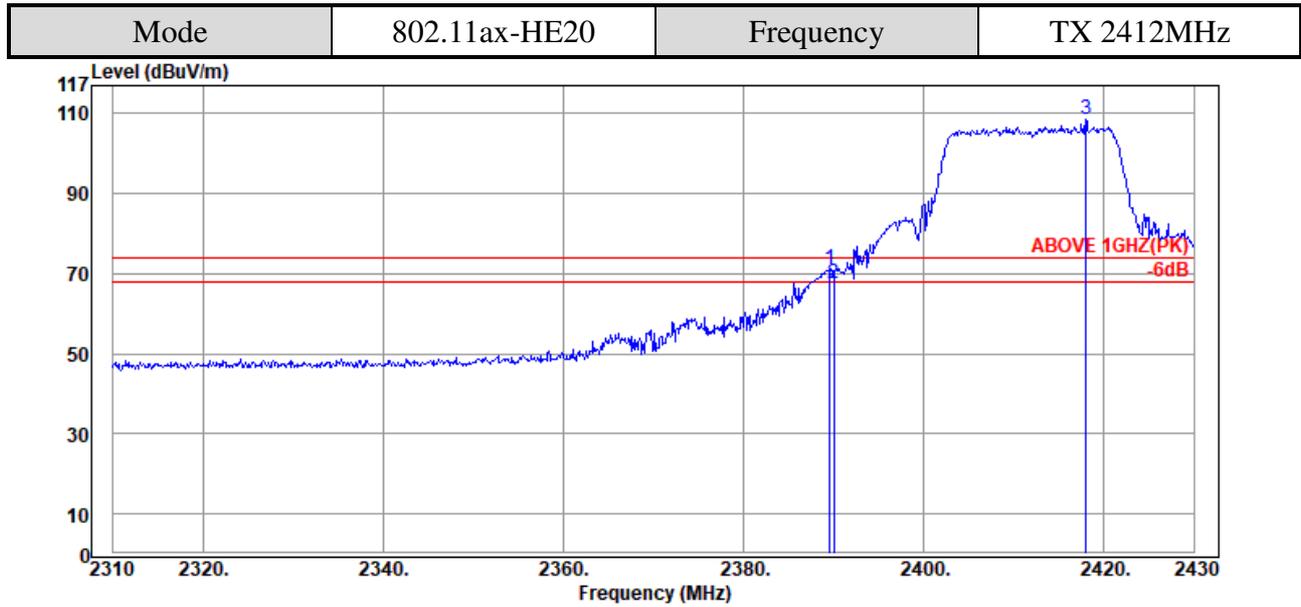

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	36.89	71.23	74.00	2.77	Peak
2390.04	28.32	6.03	33.22	67.57	74.00	6.43	Peak
@ 2418.00	28.44	6.06	73.87	108.37	---	---	Peak

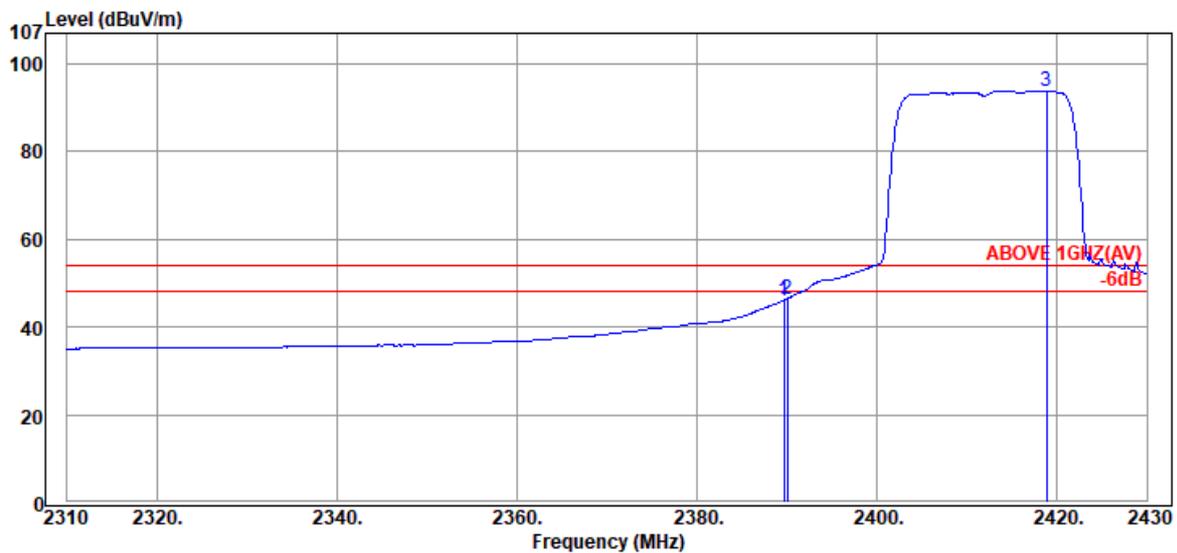

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	11.75	46.09	54.00	7.91	Average
2390.04	28.32	6.03	12.05	46.40	54.00	7.60	Average
@ 2418.84	28.44	6.06	59.35	93.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

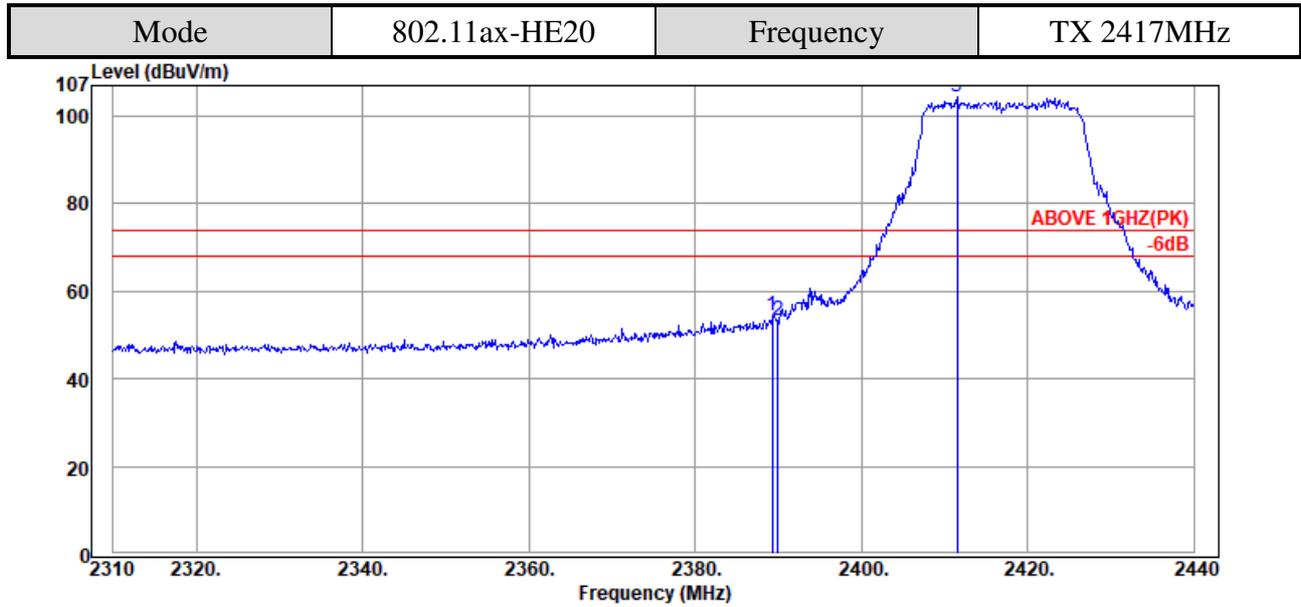

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.30	28.31	6.02	20.05	54.38	74.00	19.62	Peak
2389.95	28.32	6.02	18.79	53.13	74.00	20.87	Peak
@ 2411.53	28.42	6.05	70.00	104.47	---	---	Peak

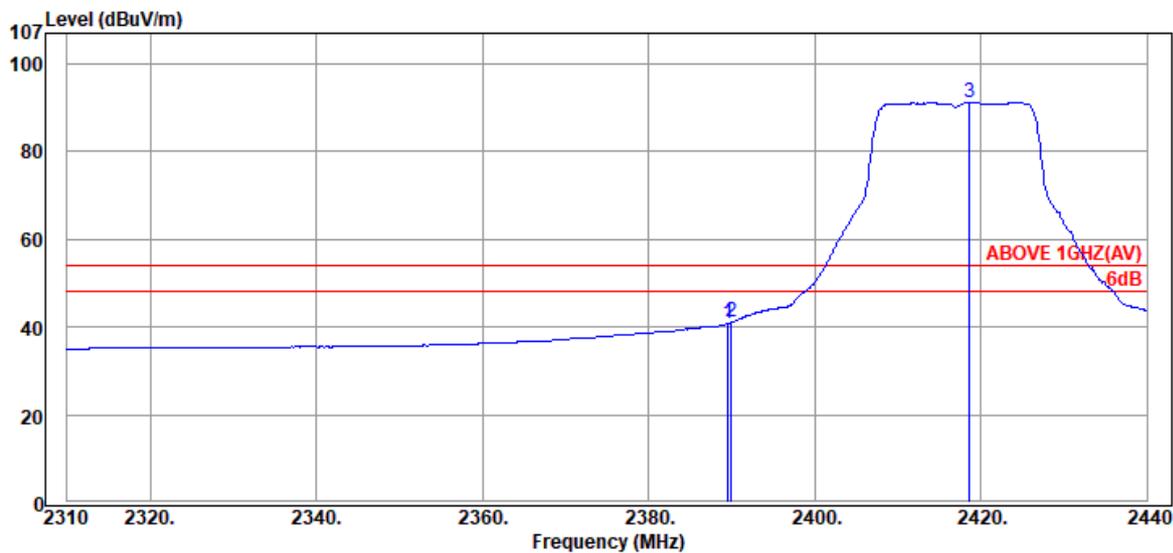

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	6.45	40.79	54.00	13.21	Average
2389.95	28.32	6.02	6.70	41.04	54.00	12.96	Average
@ 2418.68	28.44	6.06	56.75	91.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

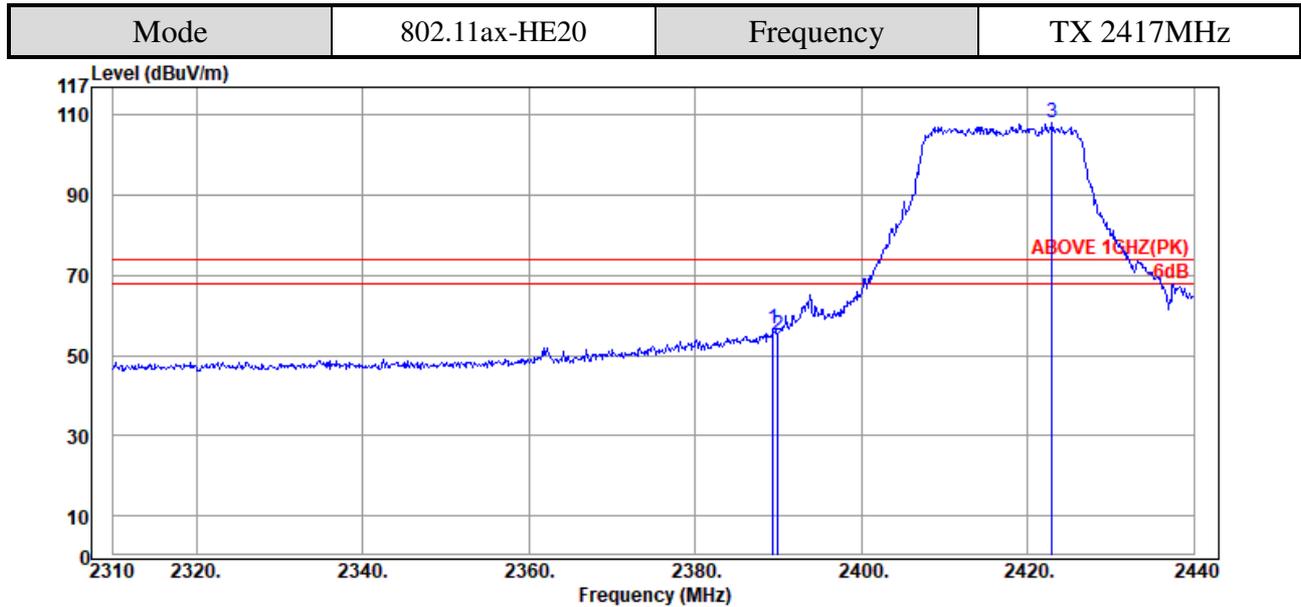

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.43	28.32	6.02	22.31	56.65	74.00	17.35	Peak
2389.95	28.32	6.02	20.74	55.08	74.00	18.92	Peak
@ 2422.97	28.45	6.06	73.45	107.96	---	---	Peak

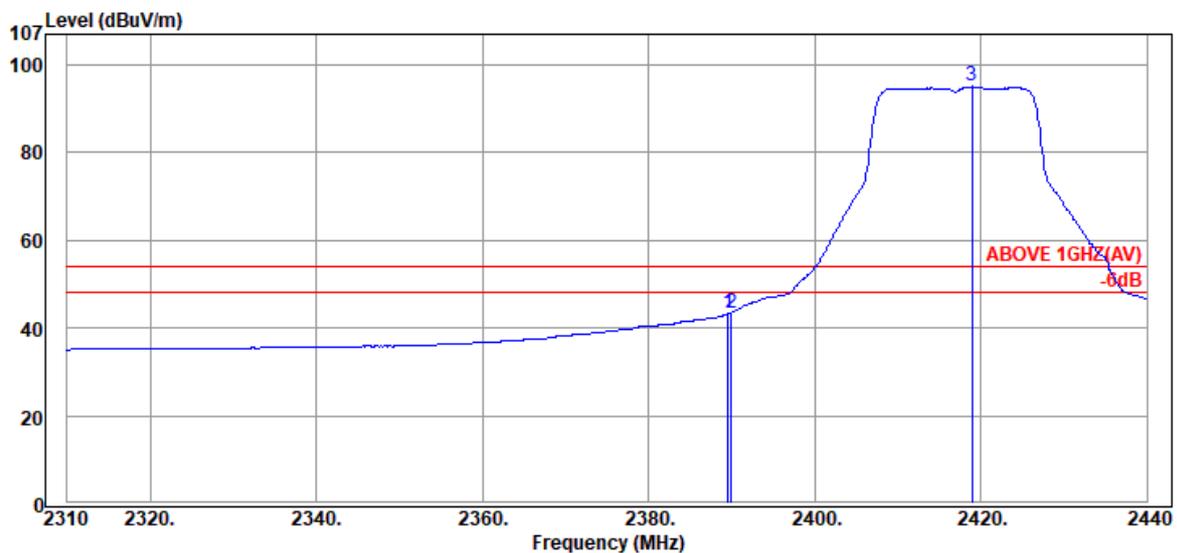

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	8.90	43.24	54.00	10.76	Average
2389.95	28.32	6.02	9.18	43.52	54.00	10.48	Average
@ 2418.94	28.44	6.06	60.55	95.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

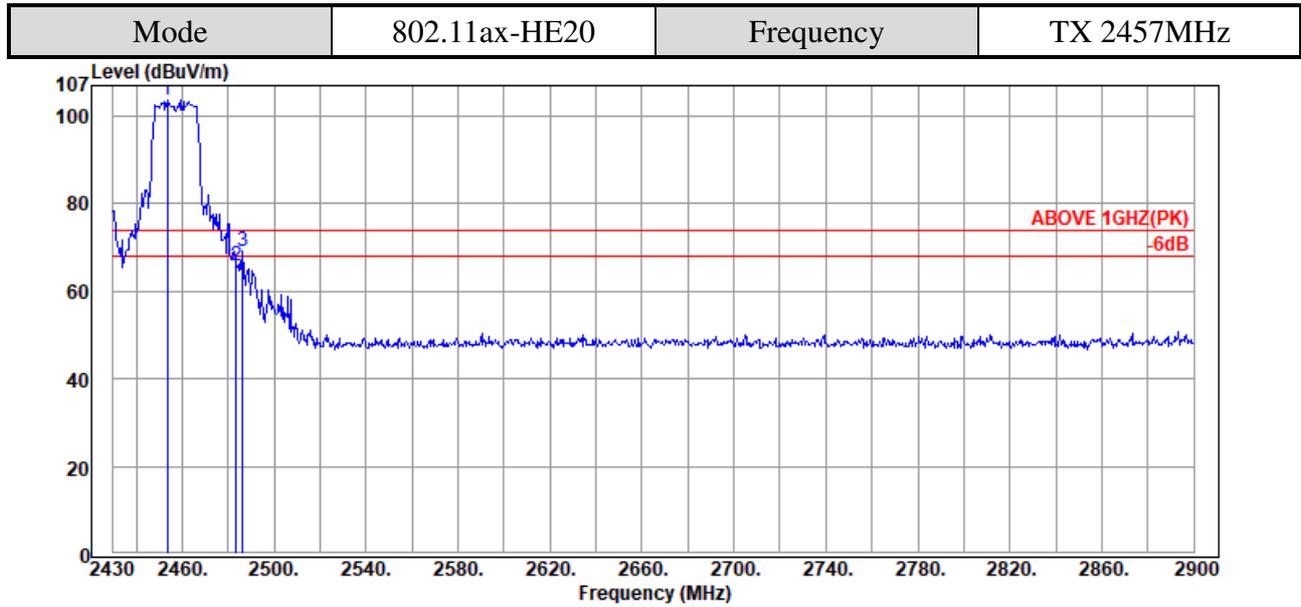

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.50	28.52	6.10	69.10	103.72	---	---	Peak
2483.58	28.70	6.13	30.95	65.78	74.00	8.22	Peak
2486.40	28.72	6.13	34.20	69.05	74.00	4.95	Peak

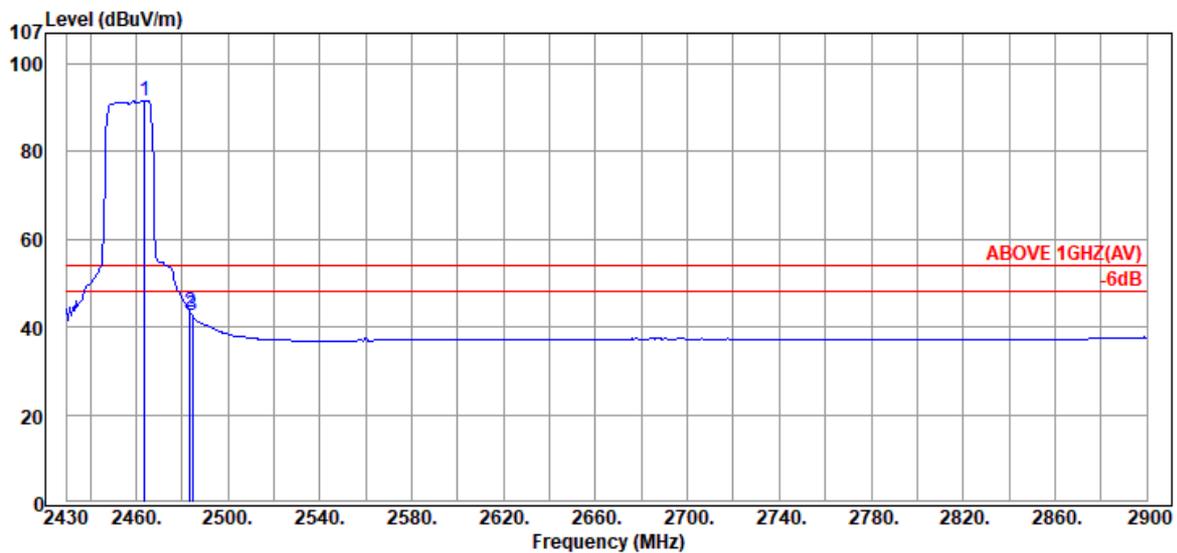


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.84	28.58	6.11	57.03	91.72	---	---	Average
2483.58	28.70	6.13	8.52	43.35	54.00	10.65	Average
2484.52	28.71	6.13	7.70	42.54	54.00	11.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

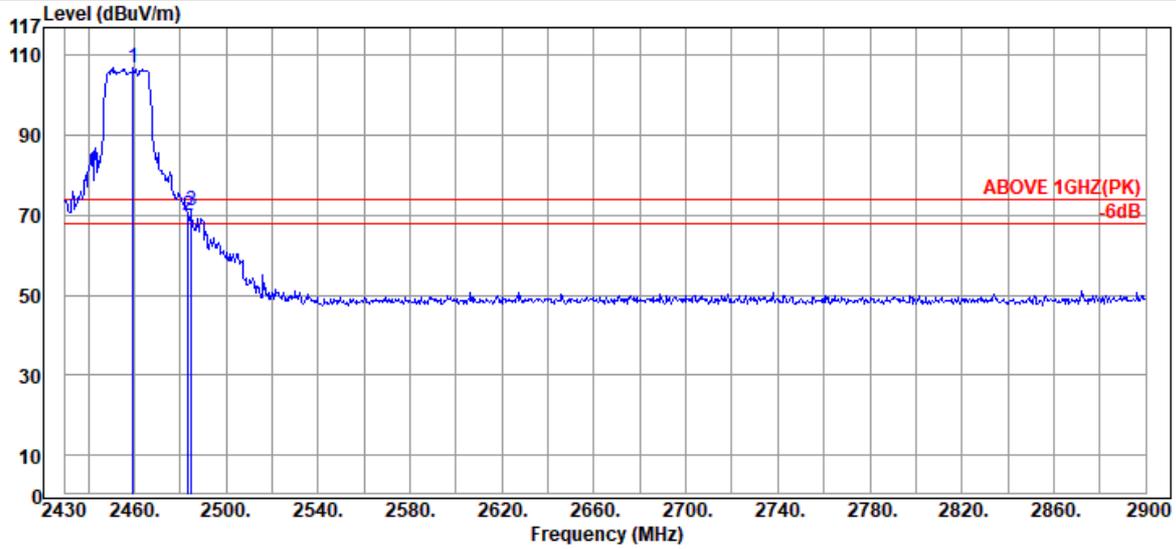

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.61	28.56	6.10	72.19	106.85	---	---	Peak
2483.58	28.70	6.13	35.21	70.04	74.00	3.96	Peak
2484.99	28.71	6.13	36.13	70.97	74.00	3.03	Peak

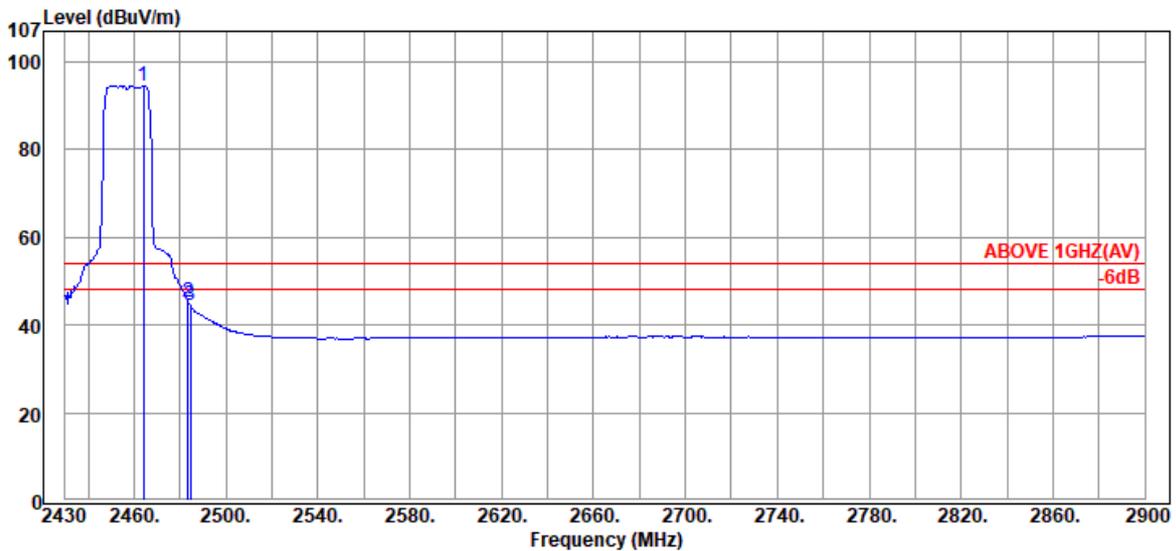

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.31	28.59	6.11	59.80	94.50	---	---	Average
2483.58	28.70	6.13	10.52	45.35	54.00	8.65	Average
2484.52	28.71	6.13	9.56	44.40	54.00	9.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

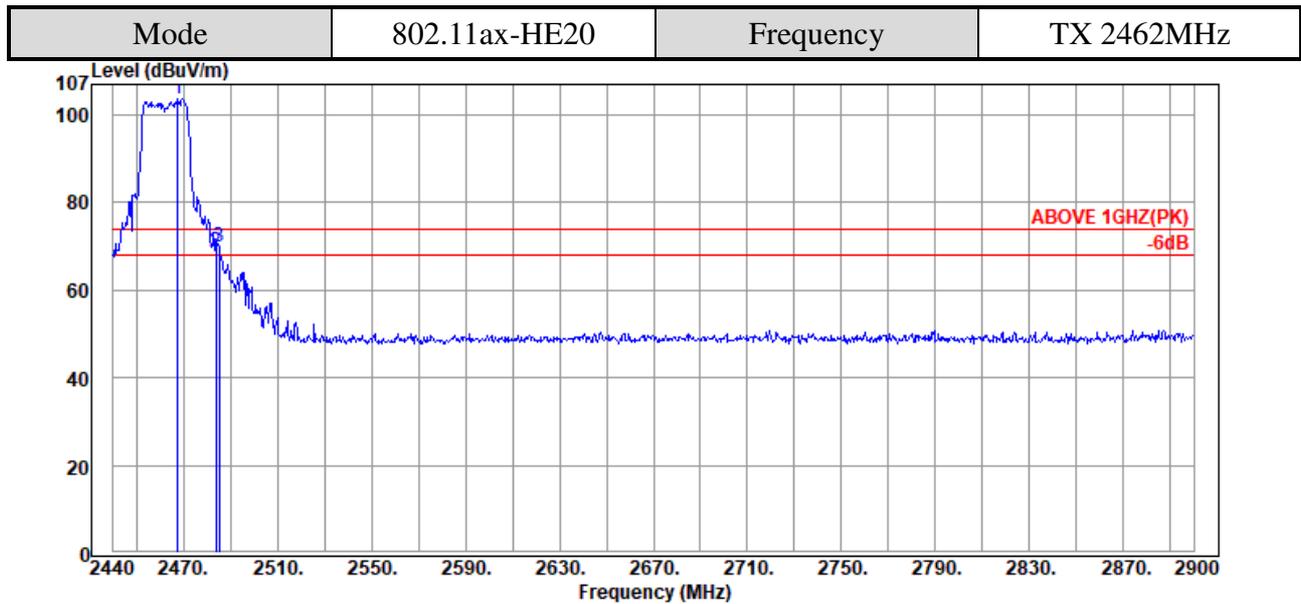

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.60	28.61	6.11	69.13	103.85	---	---	Peak
2483.70	28.70	6.13	33.85	68.68	74.00	5.32	Peak
2485.08	28.71	6.13	34.95	69.79	74.00	4.21	Peak

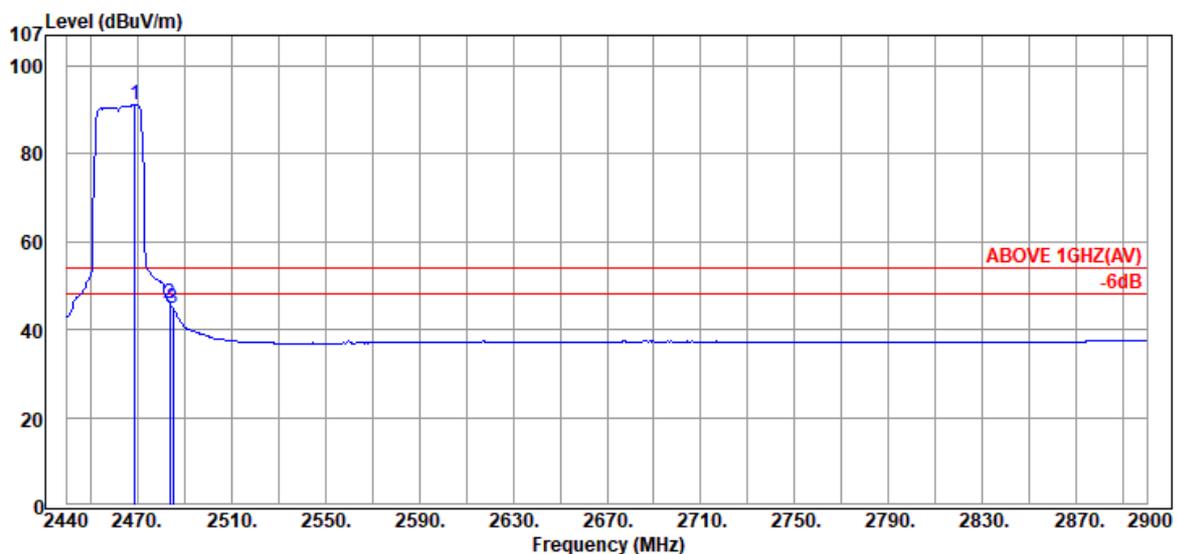

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.98	28.61	6.12	56.56	91.29	---	---	Average
2483.70	28.70	6.13	11.08	45.91	54.00	8.09	Average
2485.08	28.71	6.13	10.02	44.86	54.00	9.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

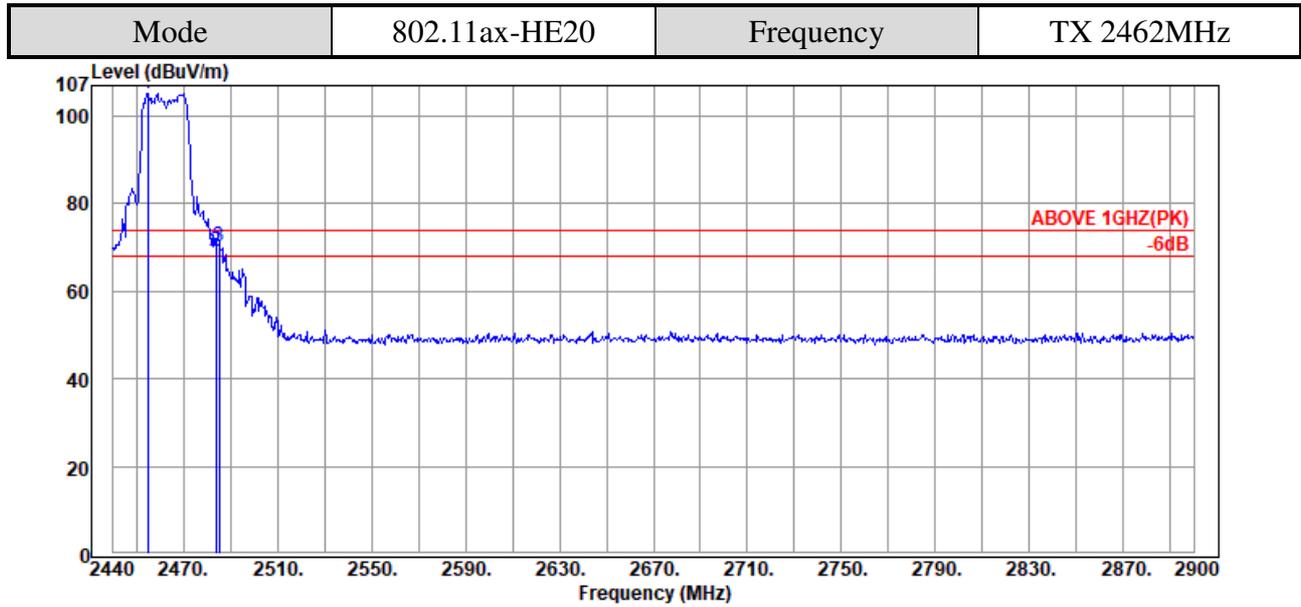

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.72	28.53	6.10	70.63	105.26	---	---	Peak
2483.70	28.70	6.13	34.40	69.23	74.00	4.77	Peak
2485.08	28.71	6.13	35.31	70.15	74.00	3.85	Peak

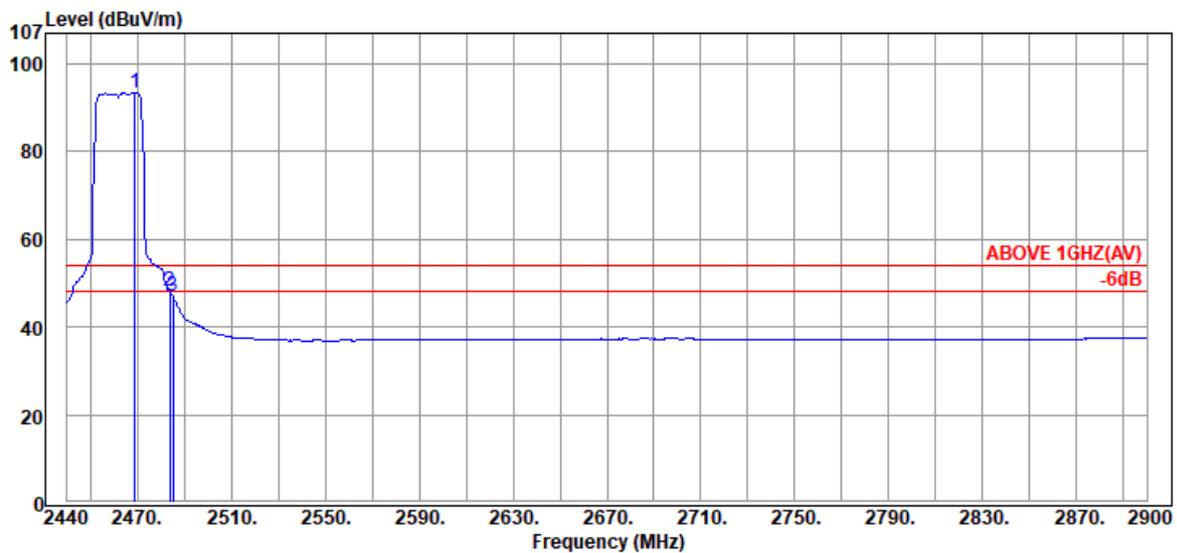

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.98	28.61	6.12	58.75	93.48	---	---	Average
2483.70	28.70	6.13	13.20	48.03	54.00	5.97	Average
2485.08	28.71	6.13	12.15	46.99	54.00	7.01	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

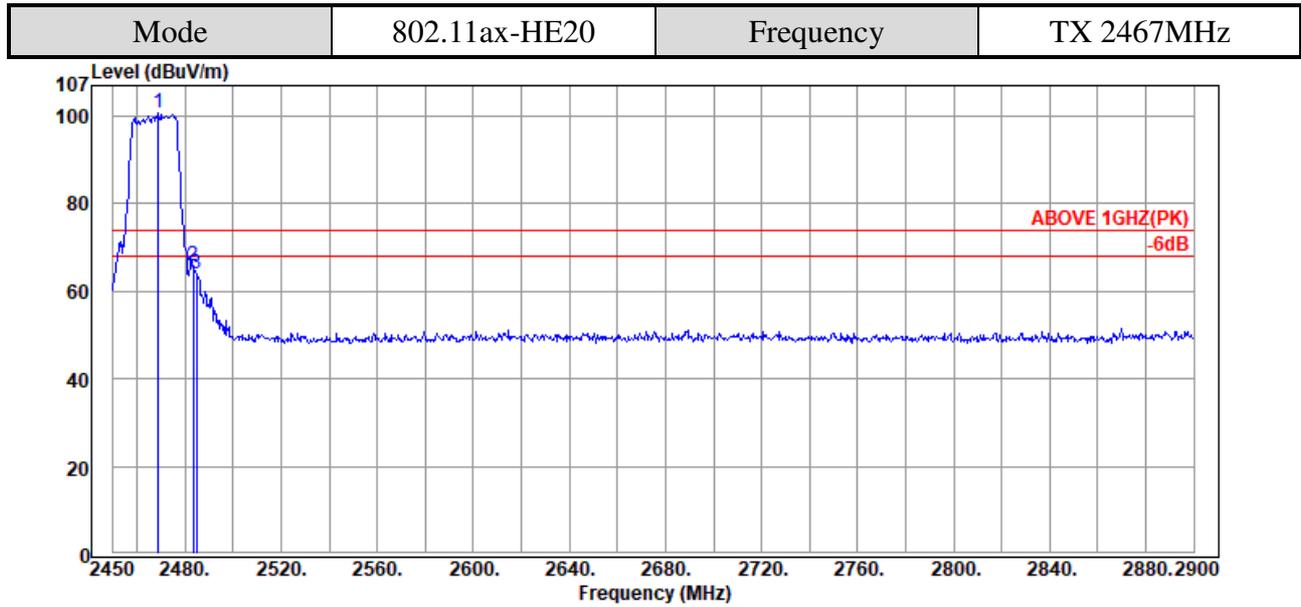

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.90	28.61	6.12	66.00	100.73	---	---	Peak
2483.30	28.70	6.13	31.14	65.97	74.00	8.03	Peak
2484.65	28.71	6.13	29.30	64.14	74.00	9.86	Peak

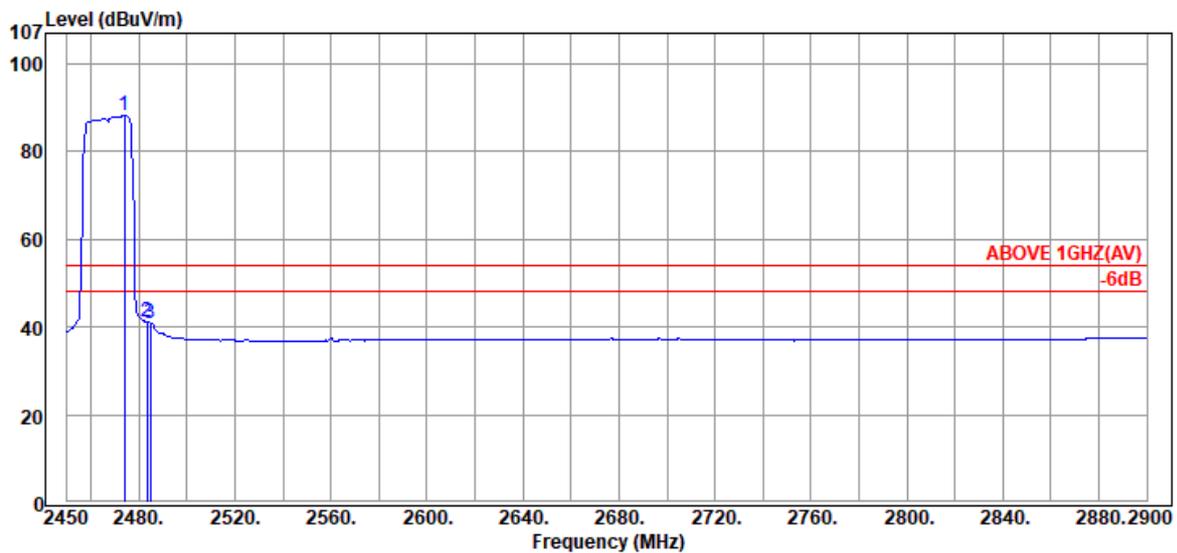

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.85	28.64	6.12	53.54	88.30	---	---	Average
2483.30	28.70	6.13	6.33	41.16	54.00	12.84	Average
2484.65	28.71	6.13	6.09	40.93	54.00	13.07	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

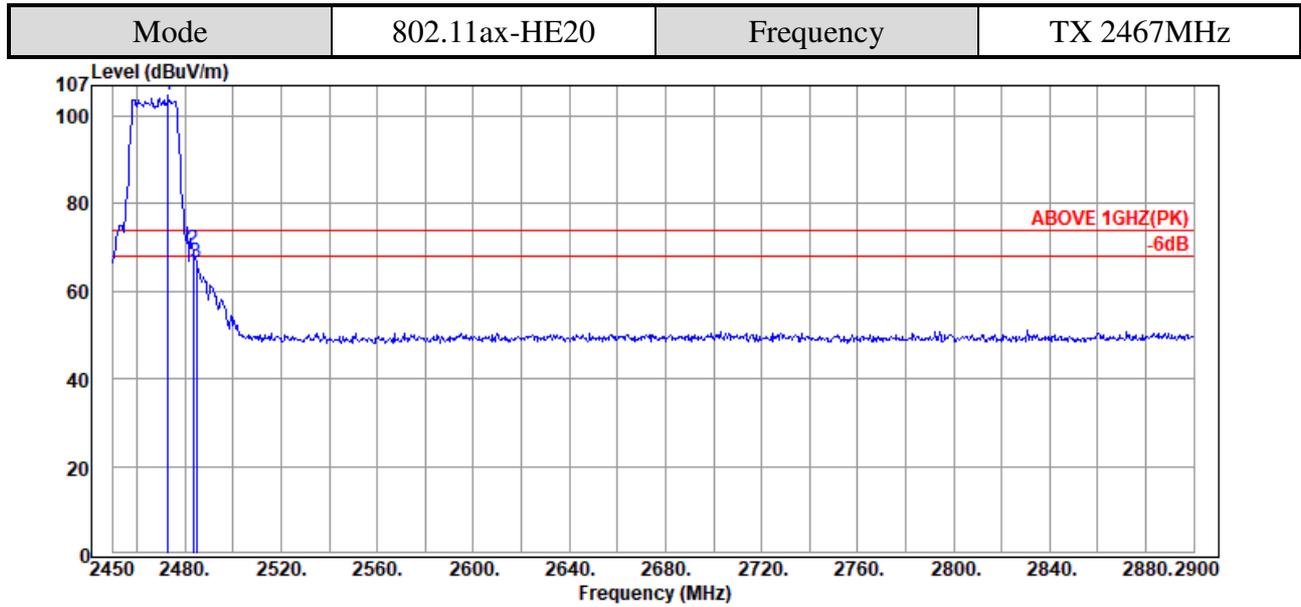

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.95	28.64	6.12	70.10	104.86	---	---	Peak
2483.30	28.70	6.13	34.69	69.52	74.00	4.48	Peak
2484.65	28.71	6.13	31.62	66.46	74.00	7.54	Peak

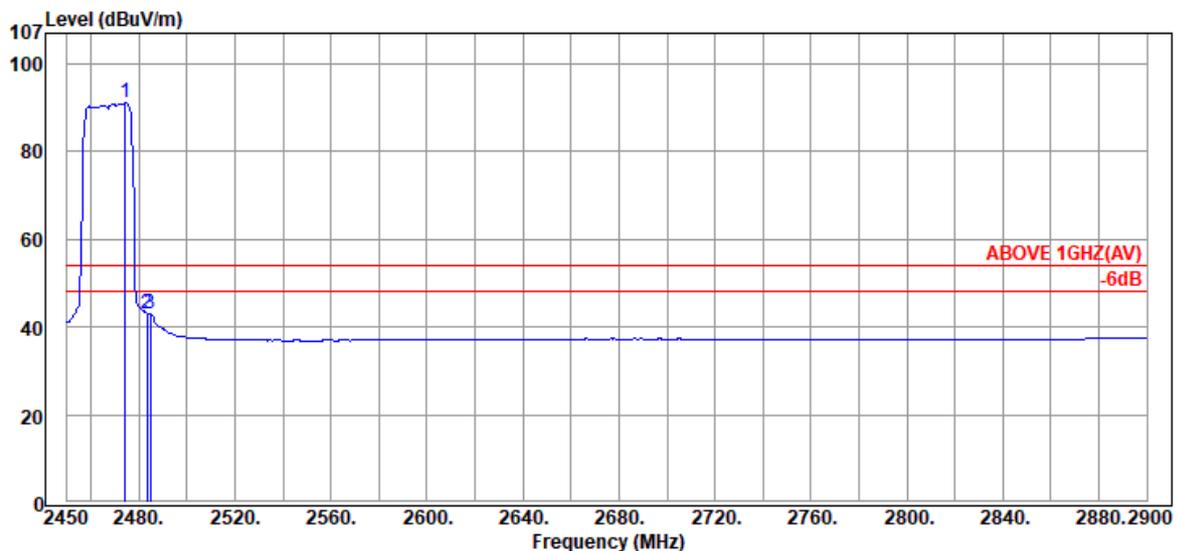


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.30	28.65	6.12	56.32	91.09	---	---	Average
2483.30	28.70	6.13	8.27	43.10	54.00	10.90	Average
2484.65	28.71	6.13	8.11	42.95	54.00	11.05	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

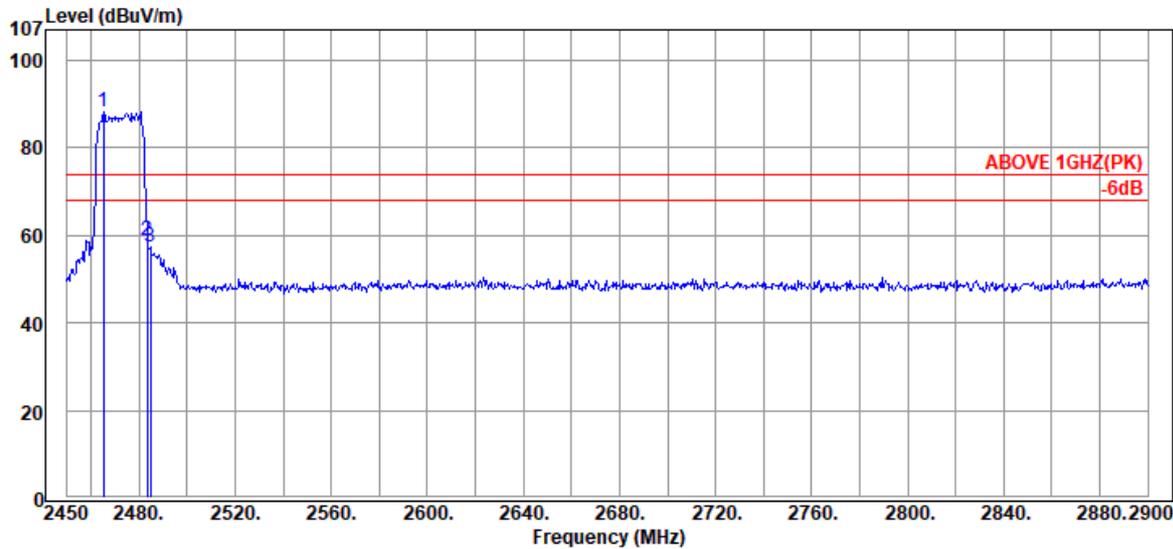

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.30	28.59	6.11	53.60	88.30	---	---	Peak
2483.30	28.70	6.13	23.95	58.78	74.00	15.22	Peak
2484.65	28.71	6.13	22.59	57.43	74.00	16.57	Peak

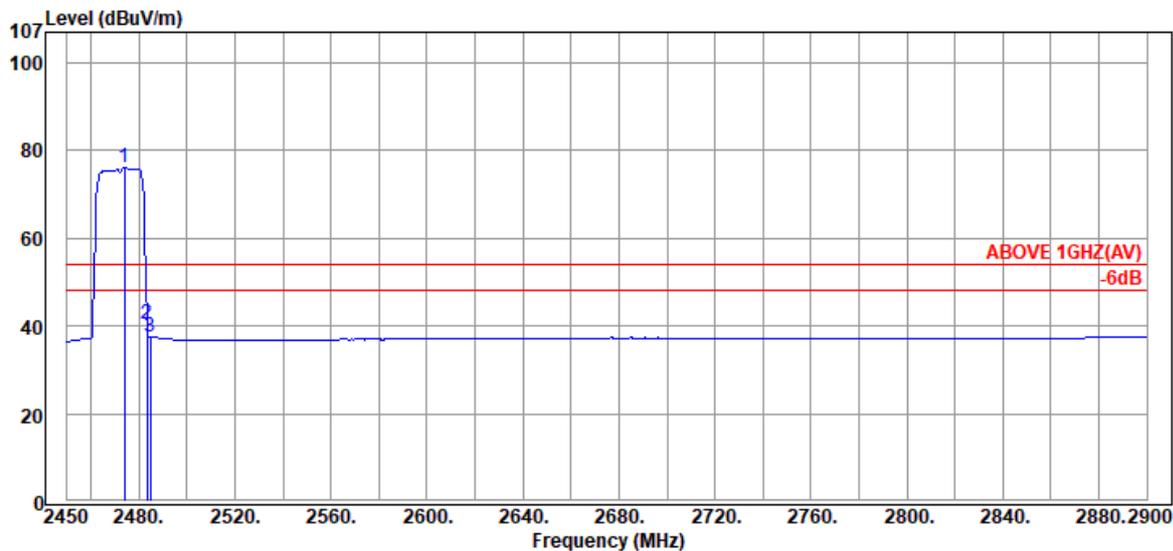


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.85	28.64	6.12	41.28	76.04	---	---	Average
2483.30	28.70	6.13	5.57	40.40	54.00	13.60	Average
2484.65	28.71	6.13	2.70	37.54	54.00	16.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

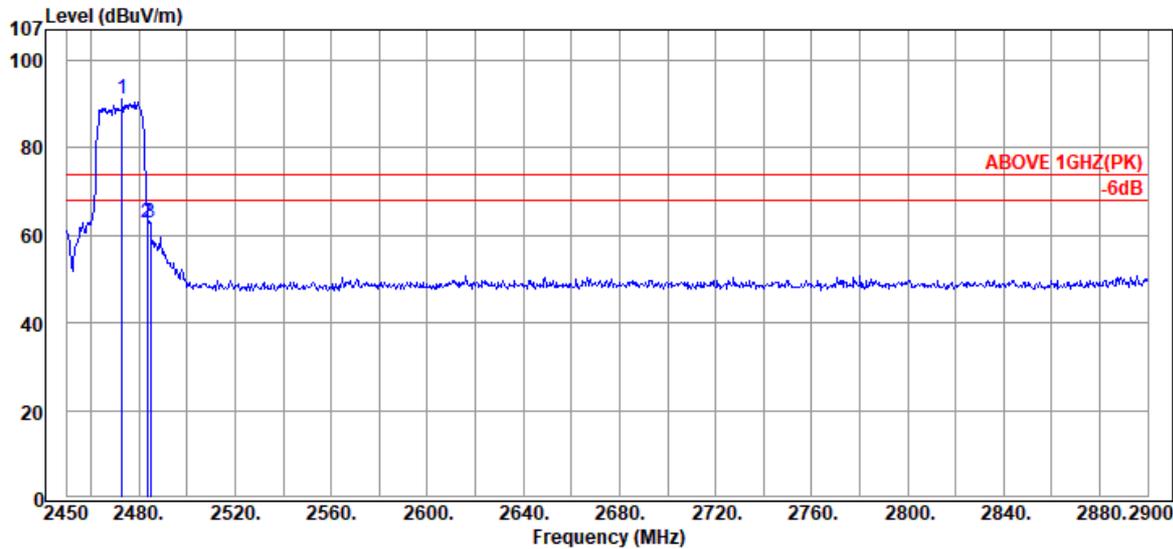

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.95	28.64	6.12	56.30	91.06	---	---	Peak
2483.30	28.70	6.13	27.95	62.78	74.00	11.22	Peak
2484.65	28.71	6.13	27.87	62.71	74.00	11.29	Peak

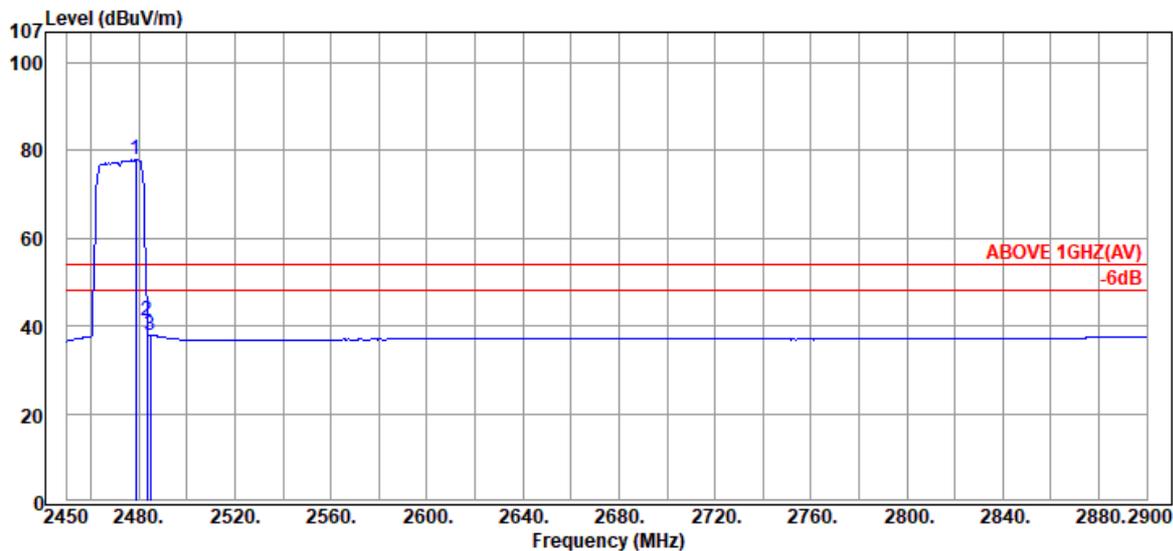


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.80	28.67	6.13	43.16	77.96	---	---	Average
2483.30	28.70	6.13	6.50	41.33	54.00	12.67	Average
2484.65	28.71	6.13	3.07	37.91	54.00	16.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

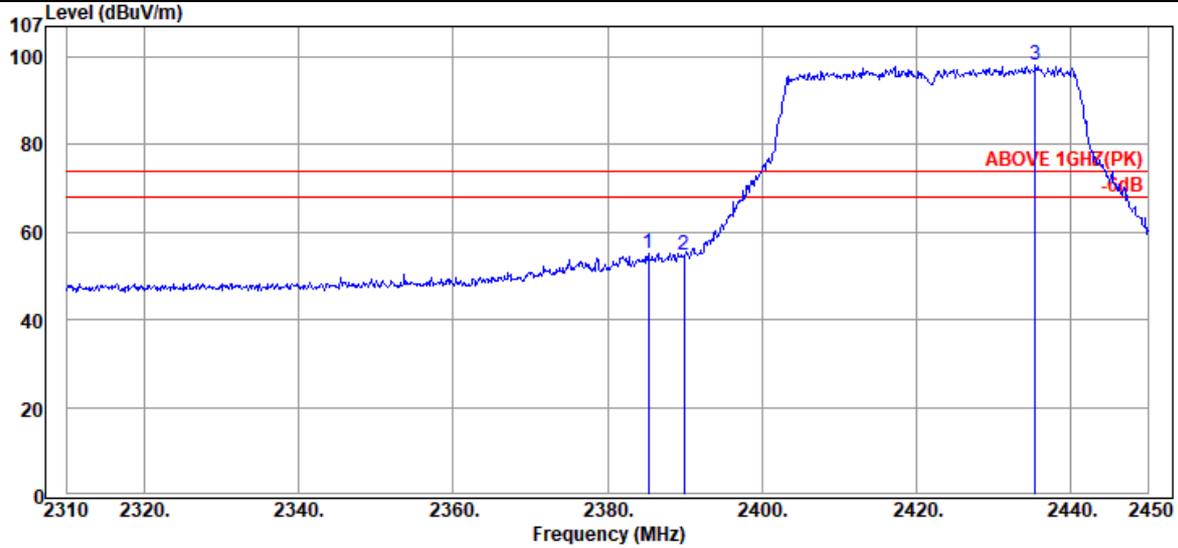

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.32	28.28	6.02	20.84	55.14	74.00	18.86	Peak
2389.94	28.32	6.02	20.49	54.83	74.00	19.17	Peak
@ 2435.44	28.47	6.08	63.62	98.17	---	---	Peak

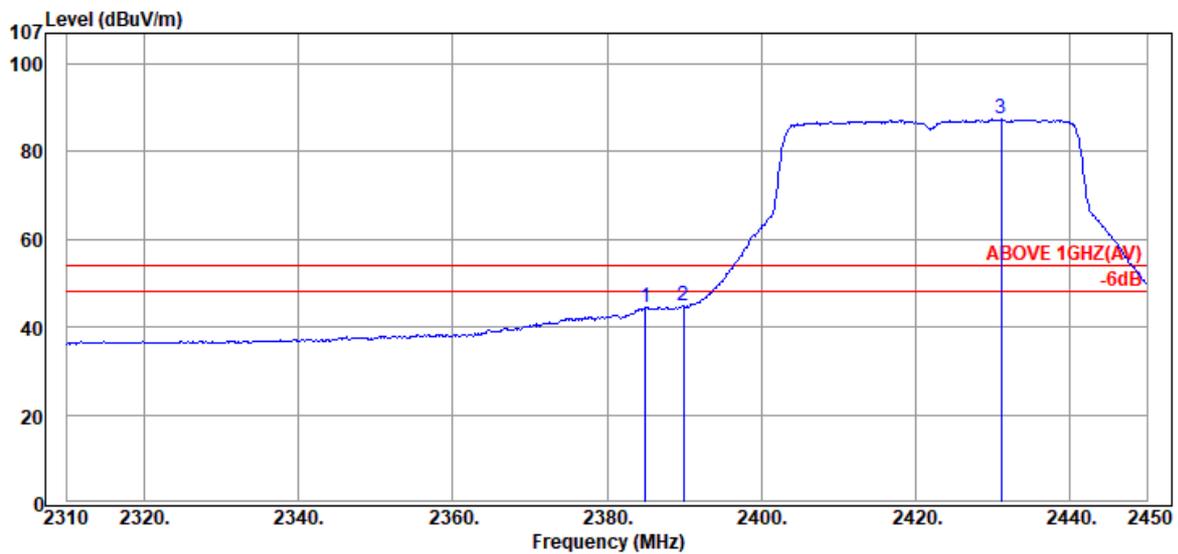

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.04	28.28	6.02	10.20	44.50	54.00	9.50	Average
2389.94	28.32	6.02	10.40	44.74	54.00	9.26	Average
@ 2431.10	28.46	6.07	52.83	87.36	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

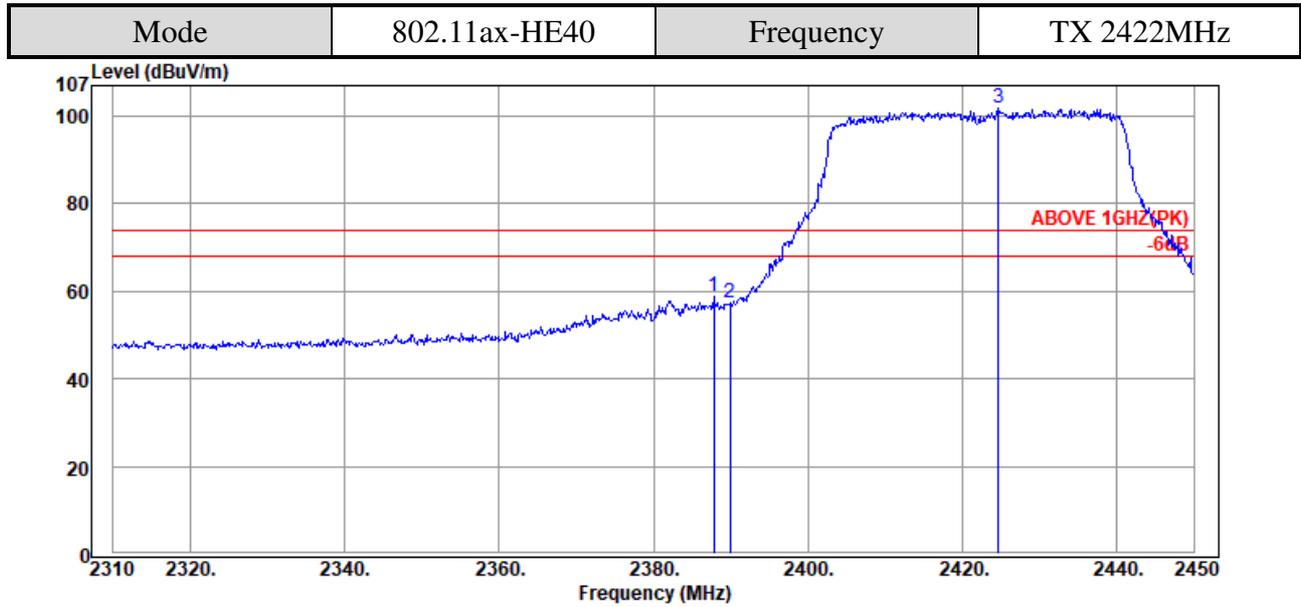

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.84	28.30	6.02	24.56	58.88	74.00	15.12	Peak
2389.94	28.32	6.02	22.99	57.33	74.00	16.67	Peak
@ 2424.66	28.45	6.06	67.29	101.80	---	---	Peak

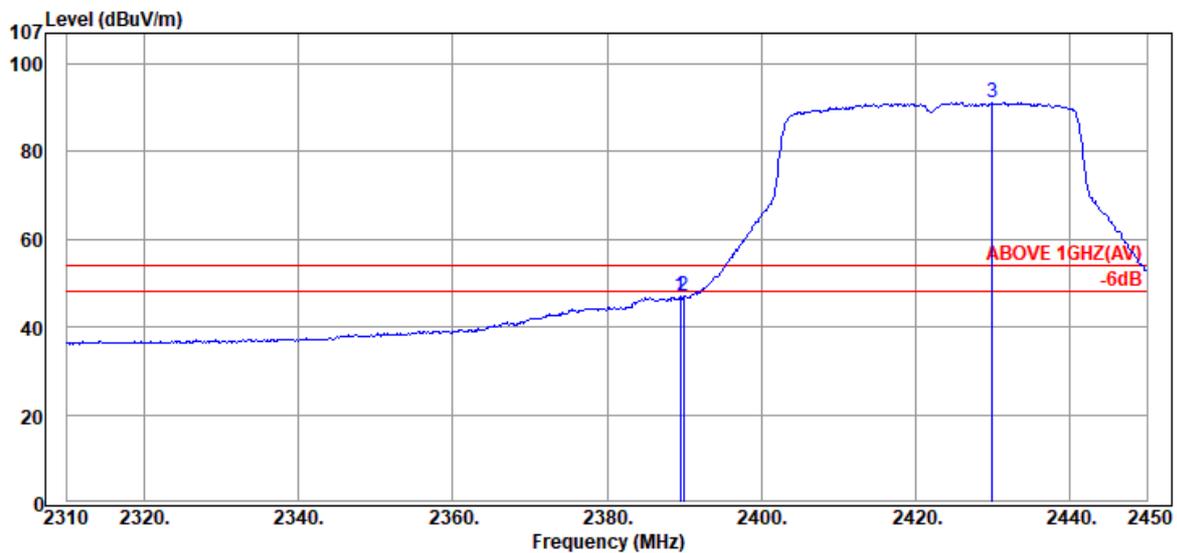

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	12.78	47.12	54.00	6.88	Average
2389.94	28.32	6.02	12.58	46.92	54.00	7.08	Average
@ 2429.98	28.46	6.07	56.66	91.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

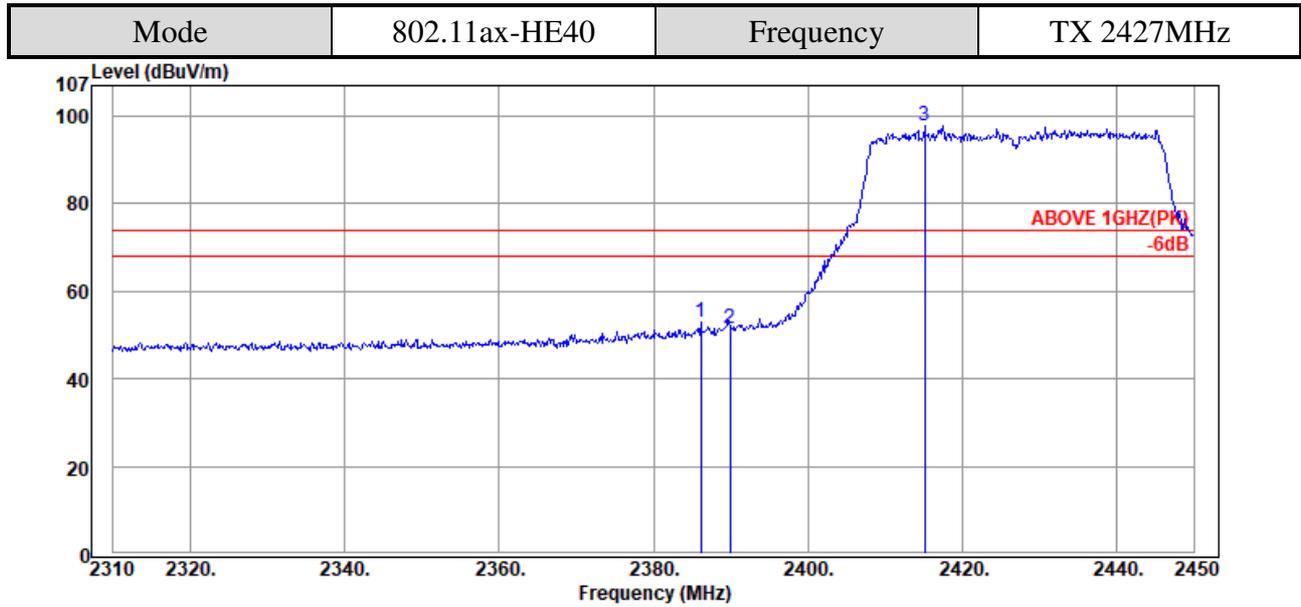

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.16	28.29	6.02	18.50	52.81	74.00	21.19	Peak
2389.94	28.32	6.02	17.28	51.62	74.00	22.38	Peak
@ 2415.14	28.43	6.05	63.43	97.91	---	---	Peak

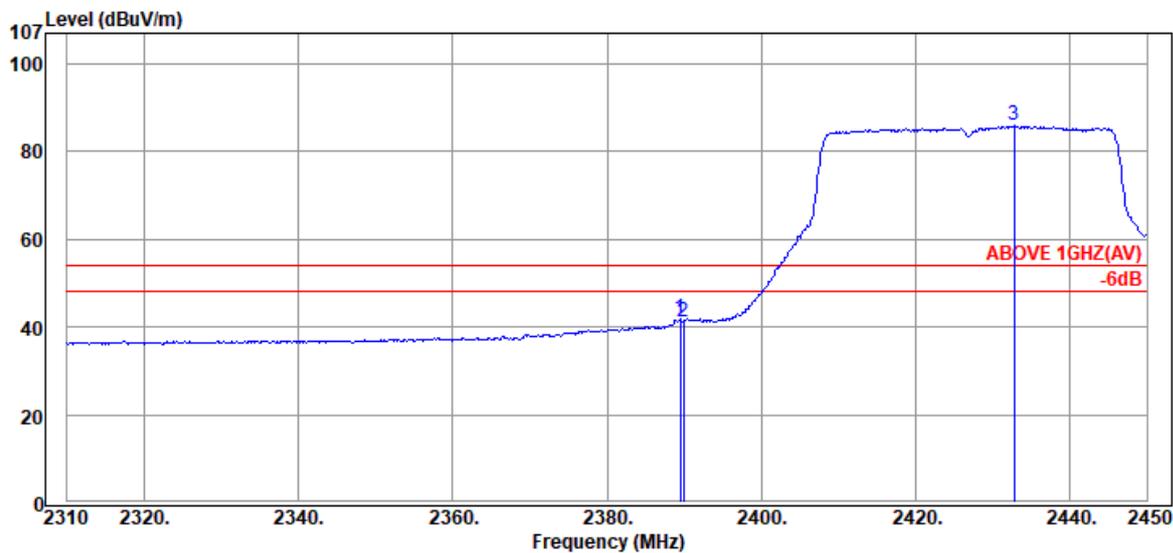

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	7.50	41.84	54.00	12.16	Average
2389.94	28.32	6.02	6.97	41.31	54.00	12.69	Average
@ 2432.78	28.47	6.07	51.35	85.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

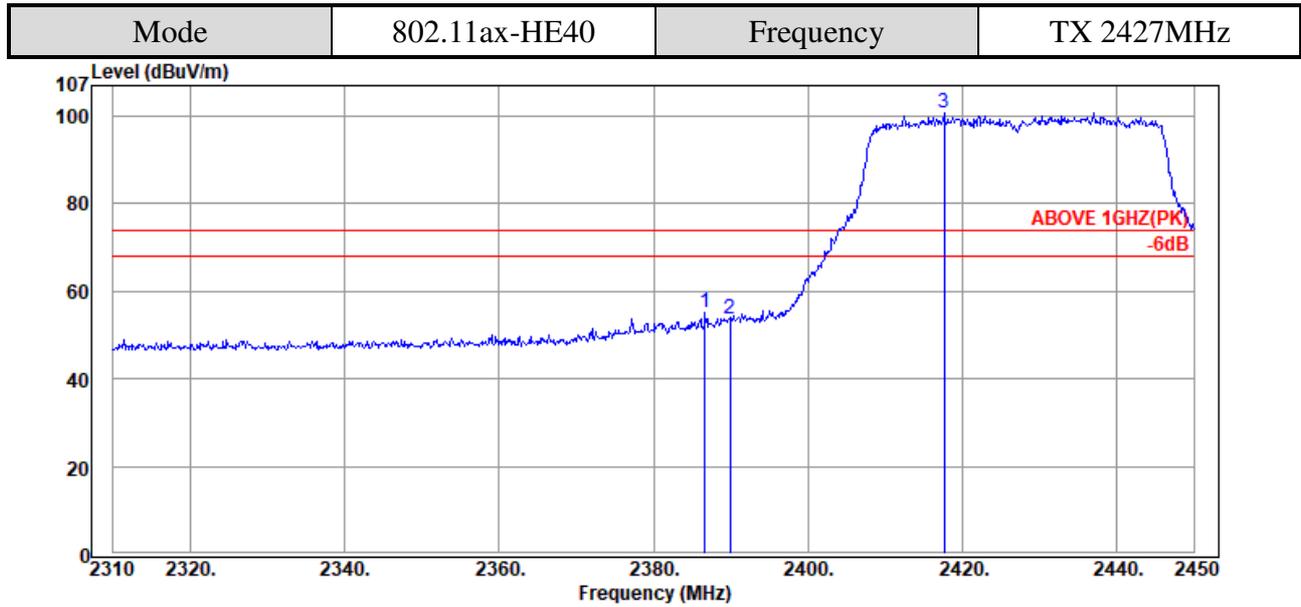

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.72	28.29	6.02	20.80	55.11	74.00	18.89	Peak
2389.94	28.32	6.02	19.33	53.67	74.00	20.33	Peak
@ 2417.66	28.44	6.06	66.38	100.88	---	---	Peak

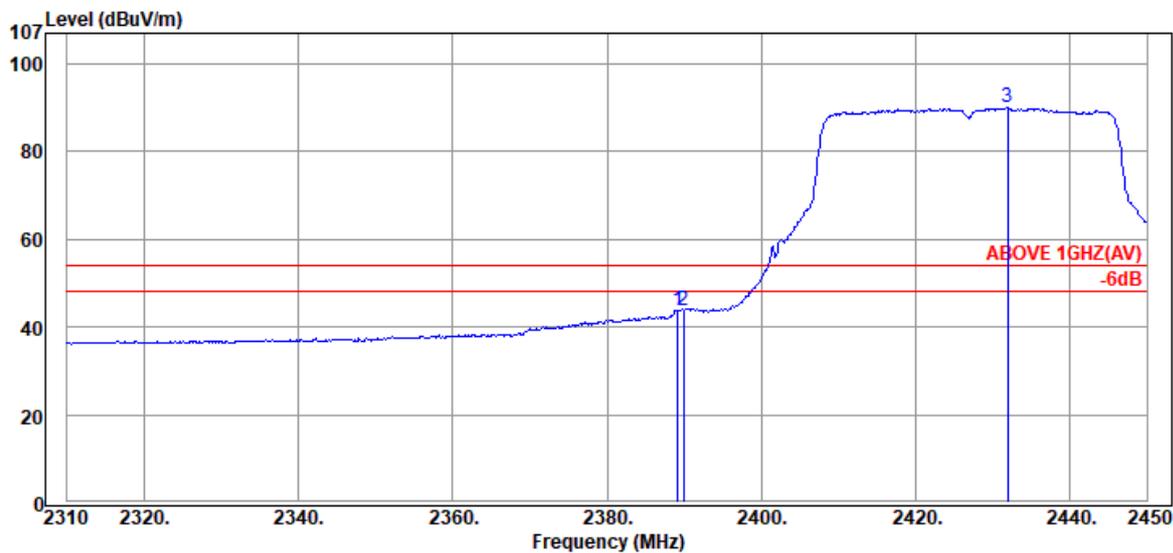


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.24	28.31	6.02	9.58	43.91	54.00	10.09	Average
2389.94	28.32	6.02	9.60	43.94	54.00	10.06	Average
@ 2431.94	28.46	6.07	55.46	89.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

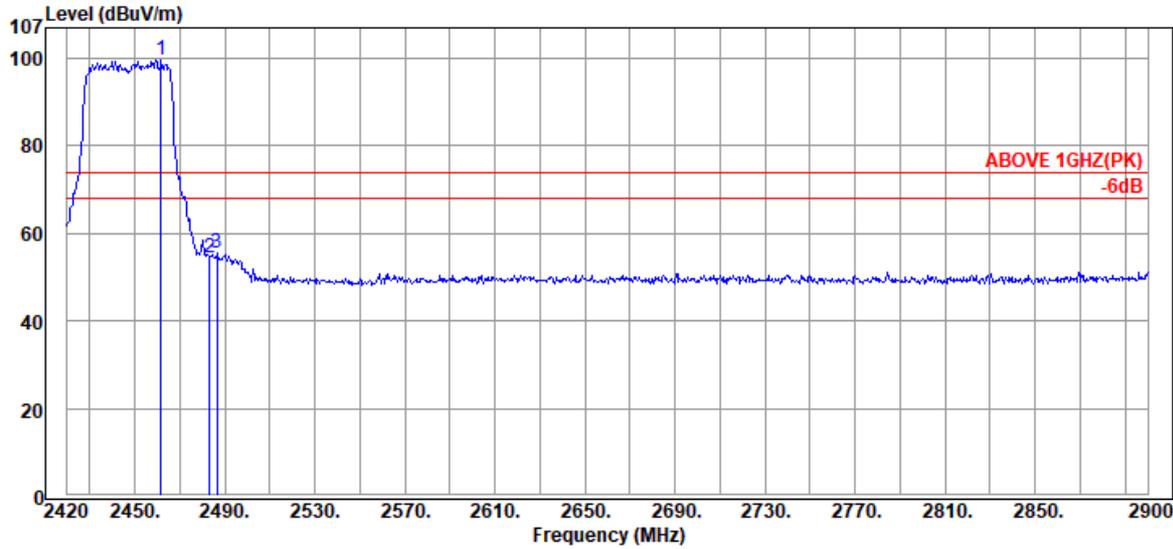

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.76	28.57	6.11	64.93	99.61	---	---	Peak
2483.36	28.70	6.13	19.58	54.41	74.00	19.59	Peak
2486.72	28.72	6.14	20.66	55.52	74.00	18.48	Peak

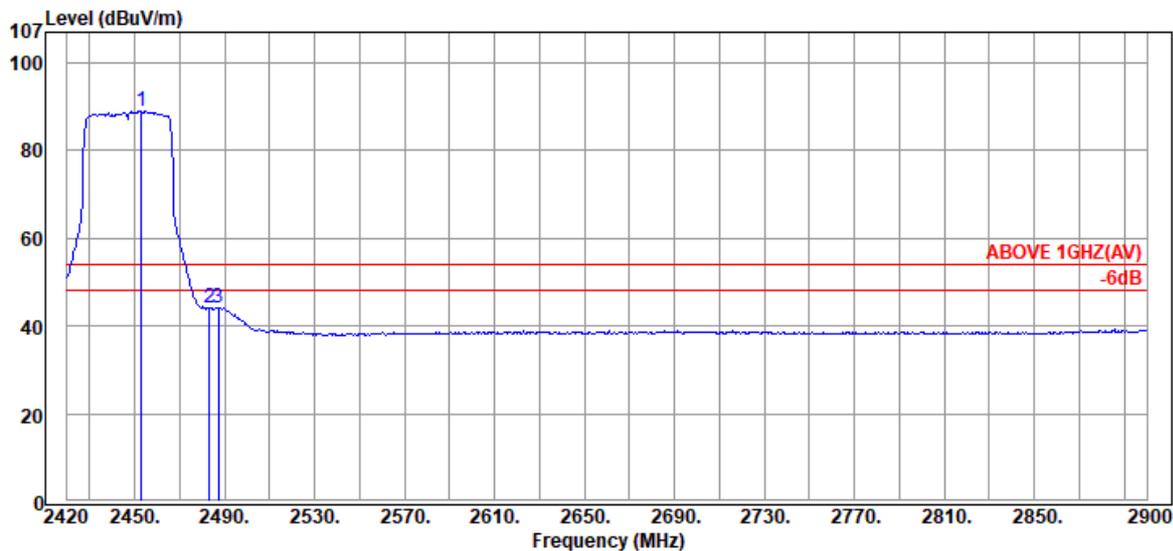


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.12	28.52	6.10	54.37	88.99	---	---	Average
2483.36	28.70	6.13	9.23	44.06	54.00	9.94	Average
2487.20	28.72	6.14	9.38	44.24	54.00	9.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

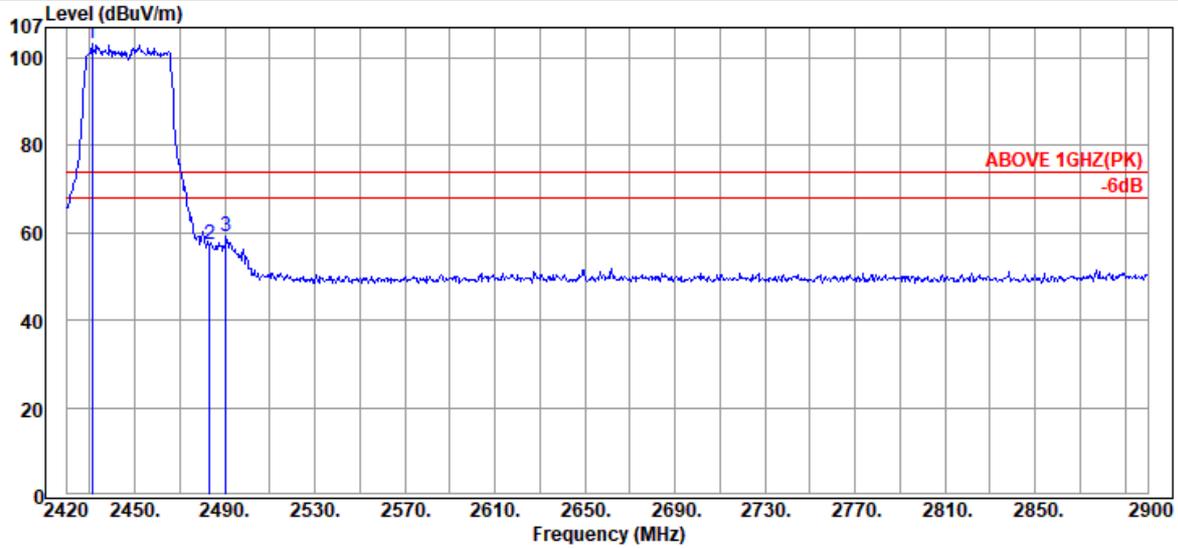

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2431.04	28.46	6.07	68.65	103.18	---	---	Peak
2483.36	28.70	6.13	22.58	57.41	74.00	16.59	Peak
2490.56	28.74	6.14	24.36	59.24	74.00	14.76	Peak

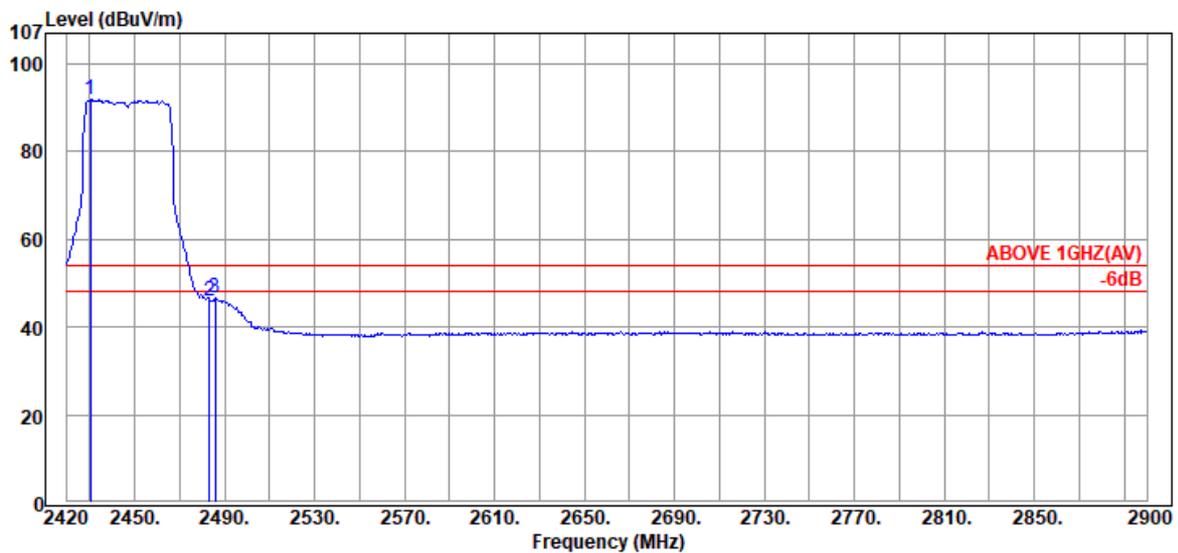


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2430.56	28.46	6.07	57.28	91.81	---	---	Average
2483.36	28.70	6.13	11.29	46.12	54.00	7.88	Average
2485.76	28.71	6.13	11.69	46.53	54.00	7.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

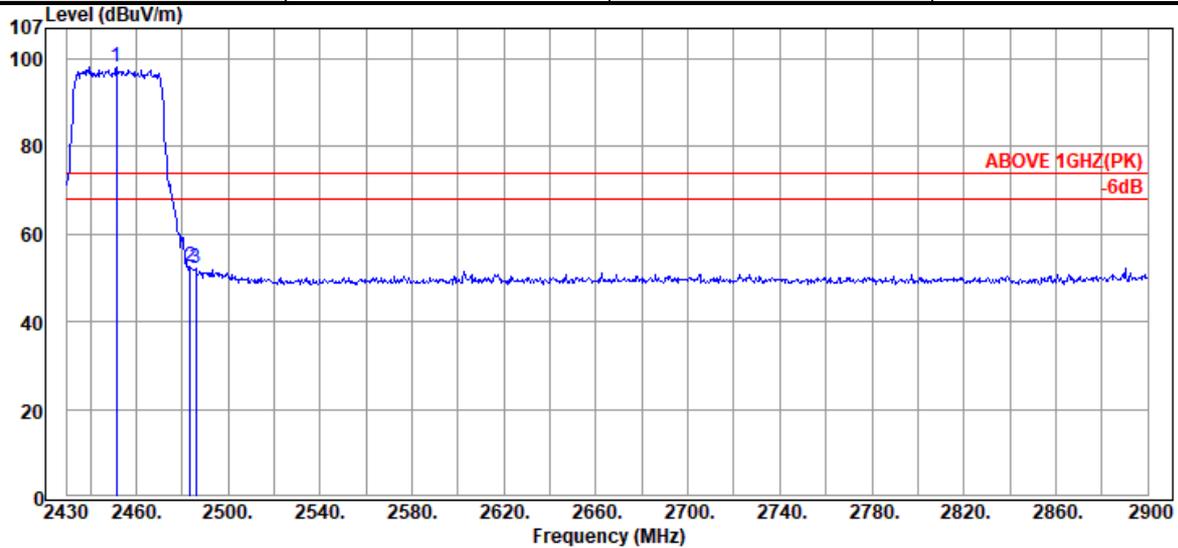

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.62	28.51	6.10	63.47	98.08	---	---	Peak
2483.58	28.70	6.13	17.88	52.71	74.00	21.29	Peak
2485.93	28.72	6.13	17.32	52.17	74.00	21.83	Peak

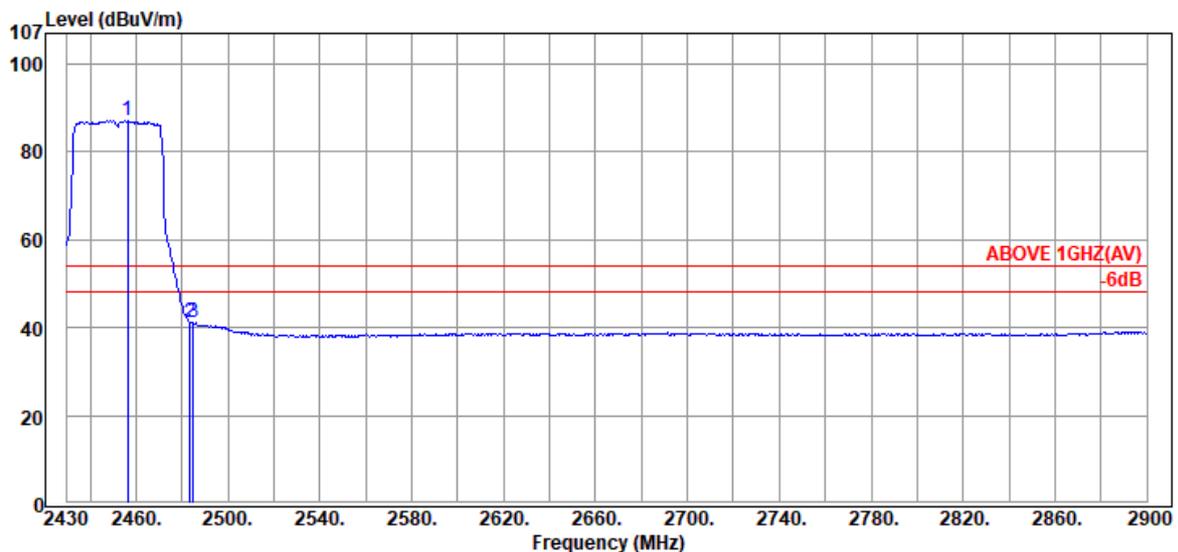

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.32	28.54	6.10	52.40	87.04	---	---	Average
2483.58	28.70	6.13	6.19	41.02	54.00	12.98	Average
2484.99	28.71	6.13	6.18	41.02	54.00	12.98	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

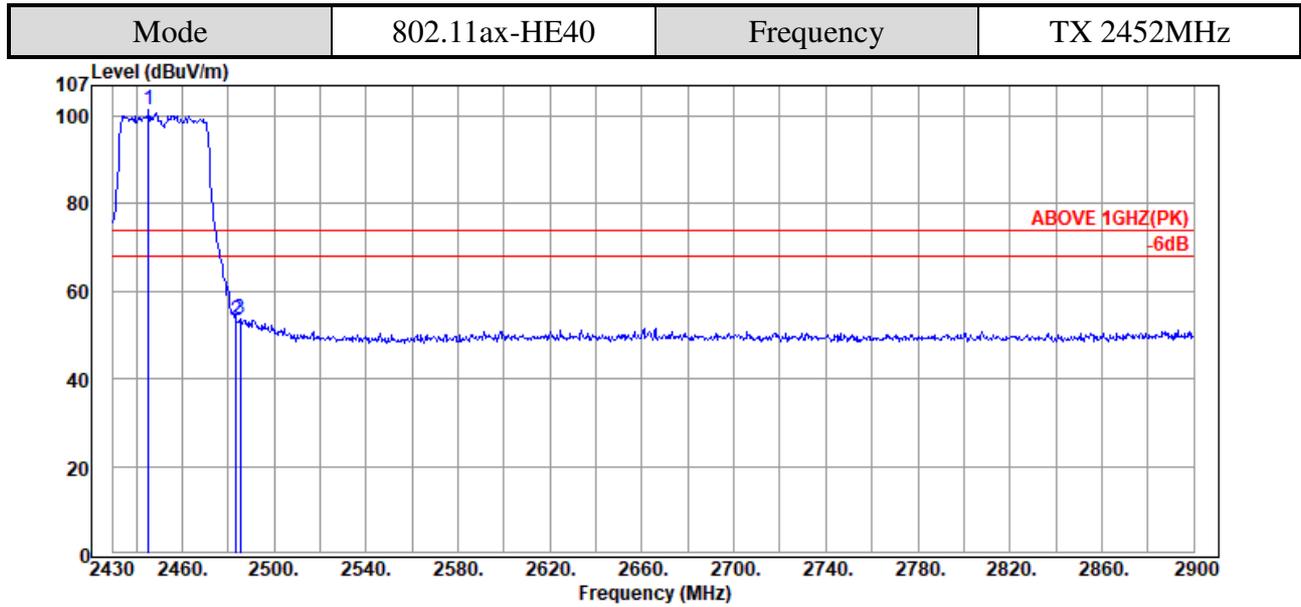

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.51	28.49	6.09	67.05	101.63	---	---	Peak
2483.58	28.70	6.13	18.57	53.40	74.00	20.60	Peak
2485.46	28.71	6.13	18.84	53.68	74.00	20.32	Peak

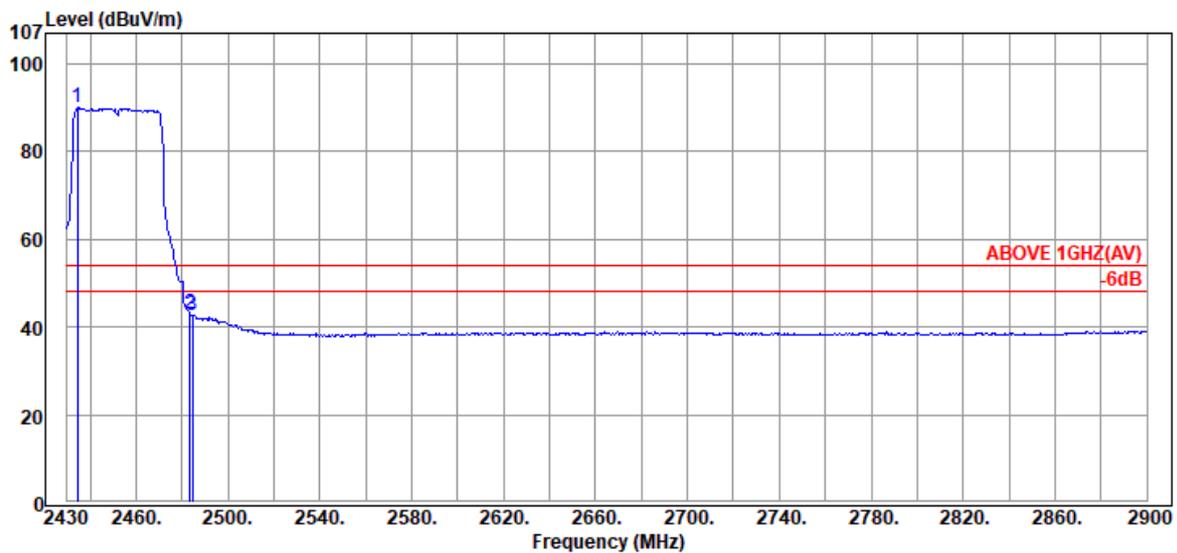


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2434.70	28.47	6.08	55.48	90.03	---	---	Average
2483.58	28.70	6.13	8.11	42.94	54.00	11.06	Average
2484.52	28.71	6.13	7.84	42.68	54.00	11.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

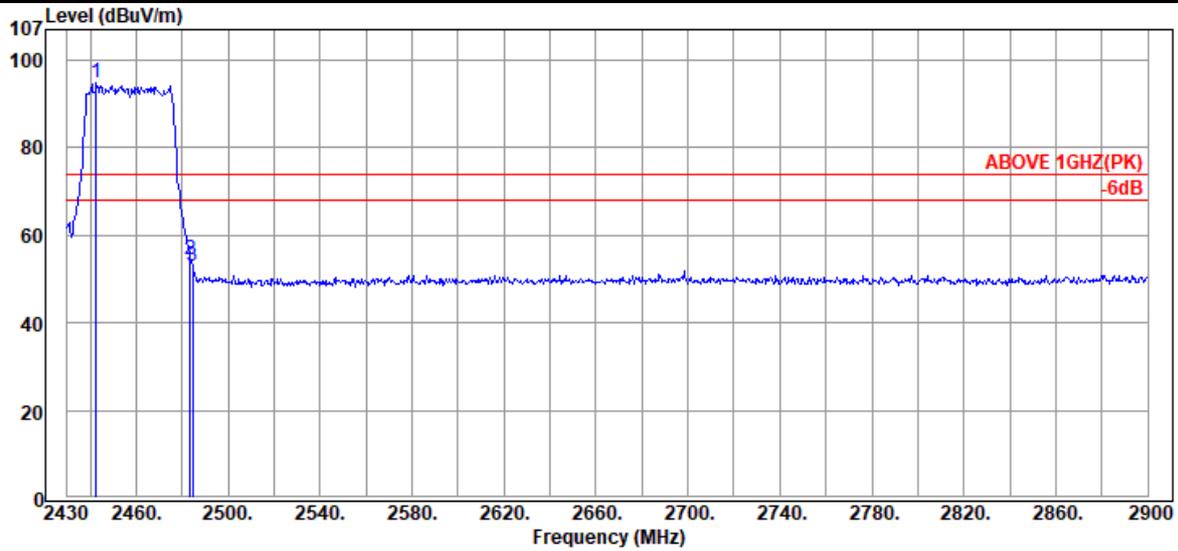

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.69	28.49	6.09	60.11	94.69	---	---	Peak
2483.58	28.70	6.13	19.57	54.40	74.00	19.60	Peak
2484.52	28.71	6.13	18.10	52.94	74.00	21.06	Peak

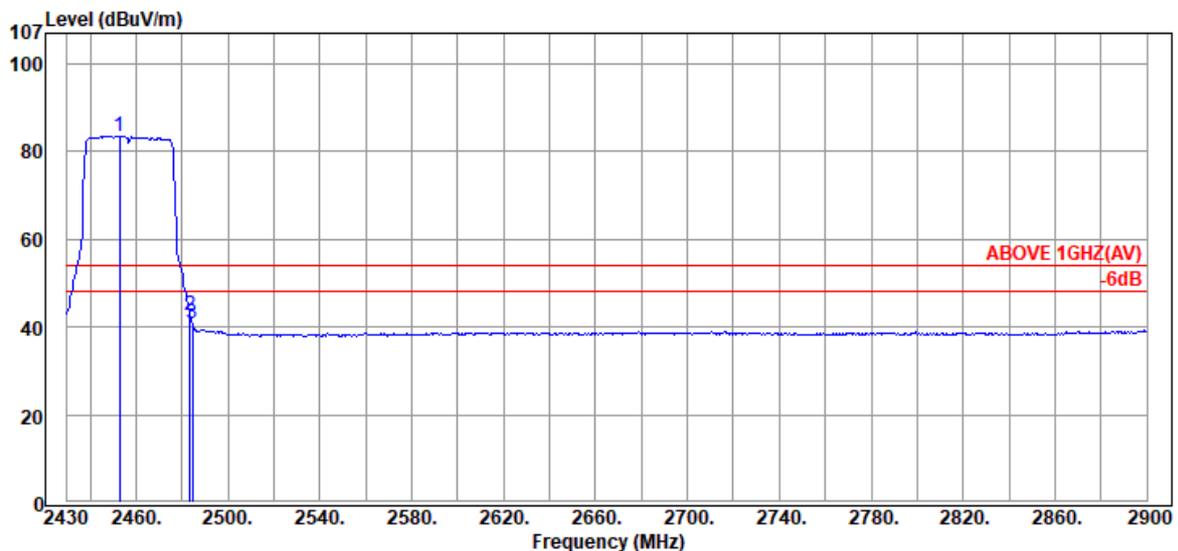


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.03	28.52	6.10	48.99	83.61	---	---	Average
2483.58	28.70	6.13	7.87	42.70	54.00	11.30	Average
2484.52	28.71	6.13	5.85	40.69	54.00	13.31	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

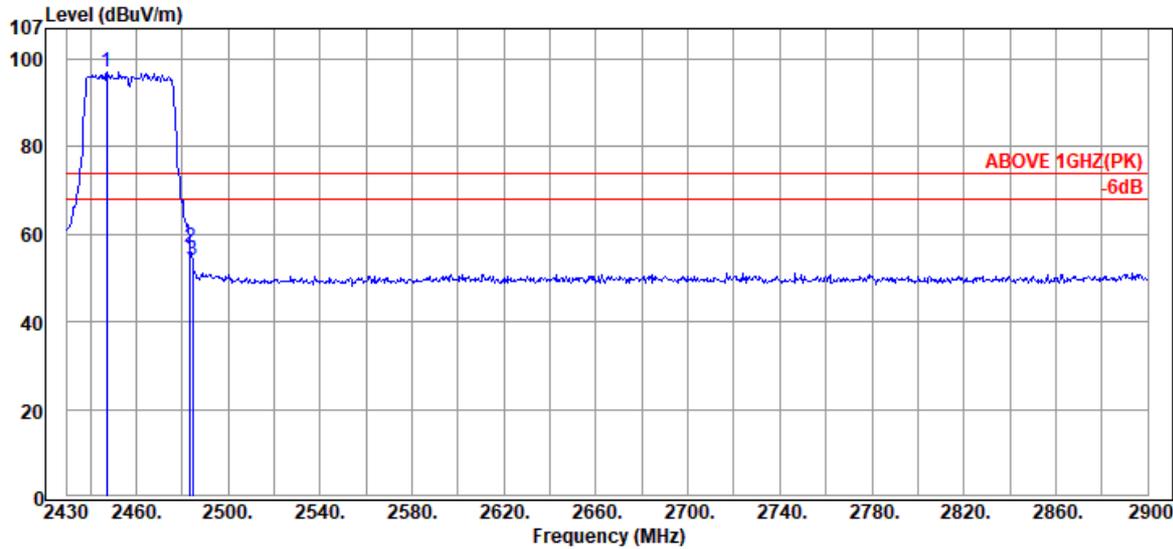

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.39	28.49	6.09	62.52	97.10	---	---	Peak
2483.58	28.70	6.13	22.31	57.14	74.00	16.86	Peak
2484.52	28.71	6.13	19.26	54.10	74.00	19.90	Peak

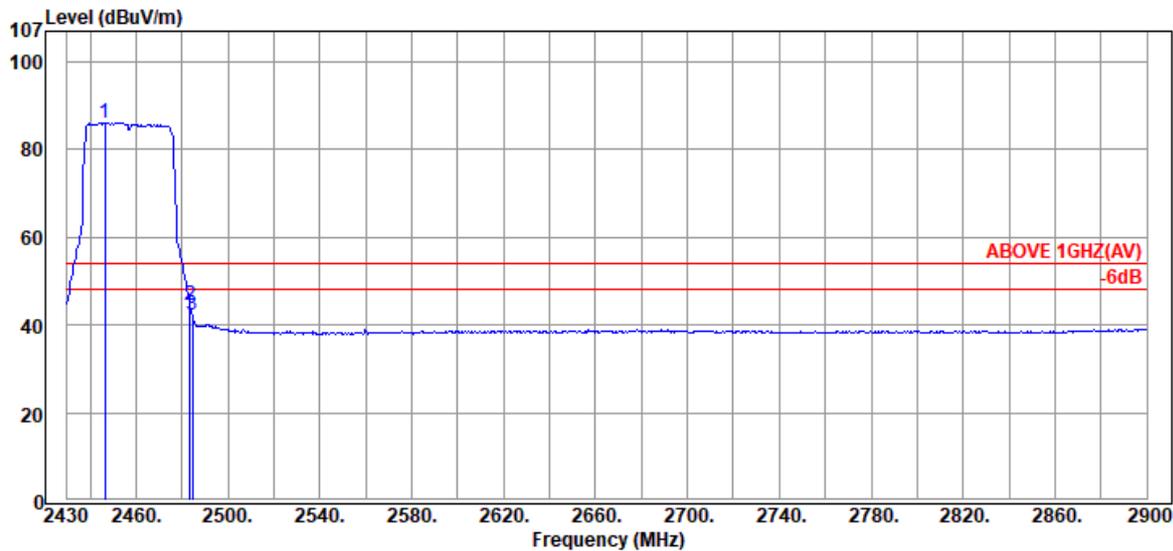


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.45	28.49	6.09	51.61	86.19	---	---	Average
2483.58	28.70	6.13	9.63	44.46	54.00	9.54	Average
2484.52	28.71	6.13	7.39	42.23	54.00	11.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

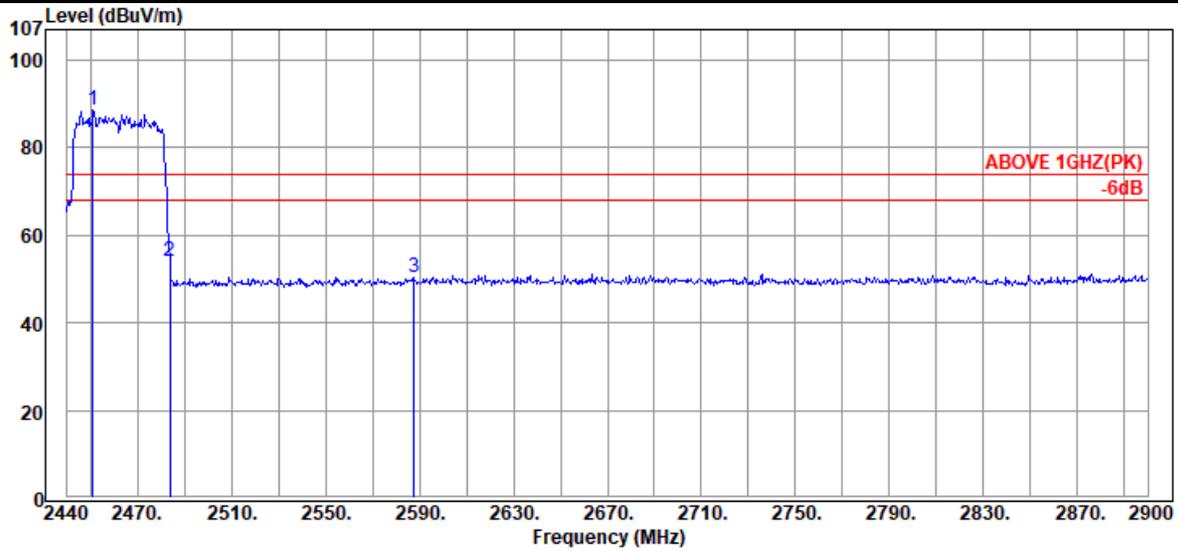

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.04	28.51	6.10	54.12	88.73	---	---	Peak
2483.70	28.70	6.13	19.39	54.22	74.00	19.78	Peak
2587.66	29.05	6.27	15.15	50.47	74.00	23.53	Peak

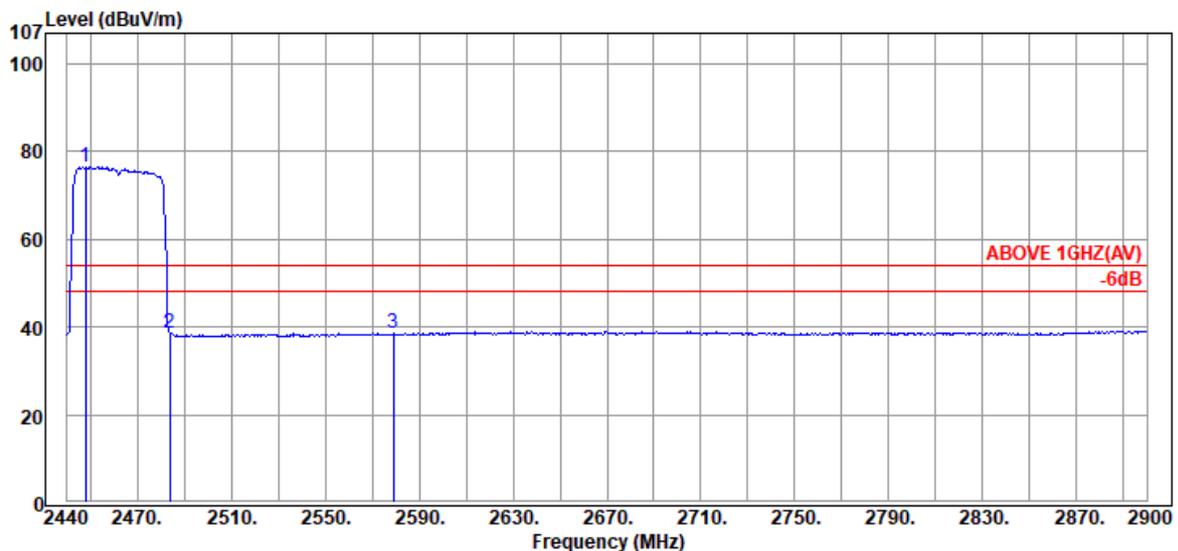


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.82	28.50	6.09	41.98	76.57	---	---	Average
2483.70	28.70	6.13	3.96	38.79	54.00	15.21	Average
2578.92	29.02	6.25	3.32	38.59	54.00	15.41	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

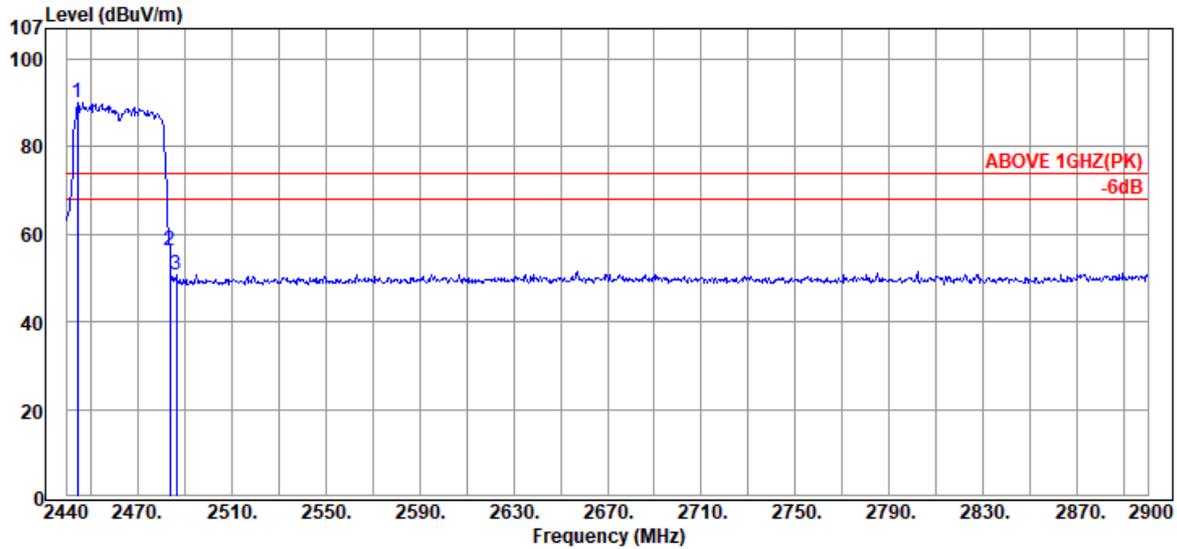

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.60	28.49	6.09	55.58	90.16	---	---	Peak
2483.70	28.70	6.13	21.54	56.37	74.00	17.63	Peak
2486.46	28.72	6.13	16.06	50.91	74.00	23.09	Peak

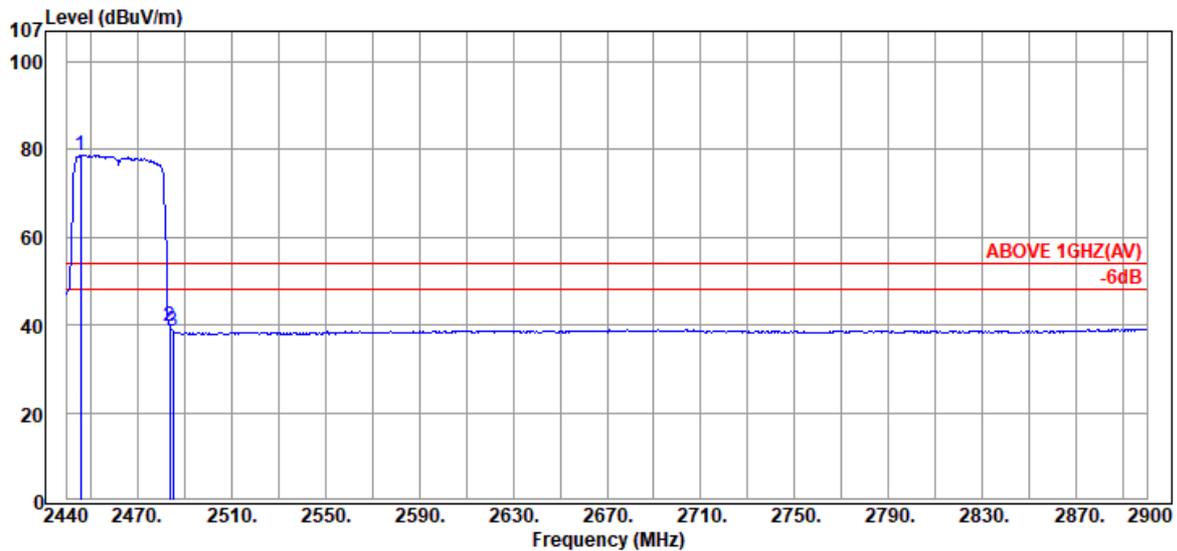


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.98	28.49	6.09	44.29	78.87	---	---	Average
2483.70	28.70	6.13	4.75	39.58	54.00	14.42	Average
2485.08	28.71	6.13	3.84	38.68	54.00	15.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Config	26/0

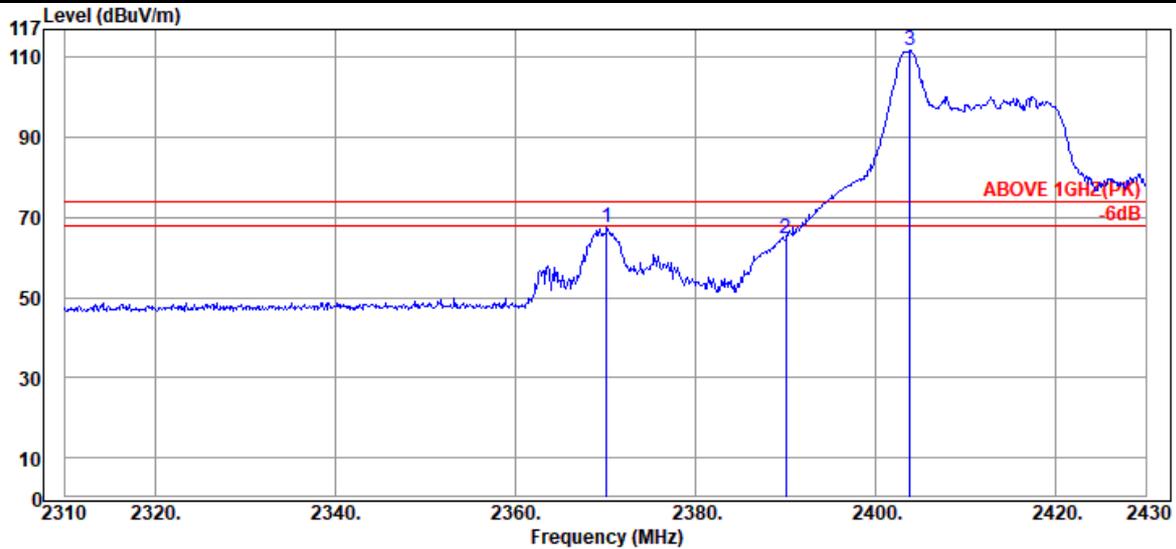

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.12	28.16	6.00	33.51	67.67	74.00	6.33	Peak
2390.04	28.32	6.03	30.54	64.89	74.00	9.11	Peak
@ 2403.84	28.41	6.04	77.31	111.76	---	---	Peak

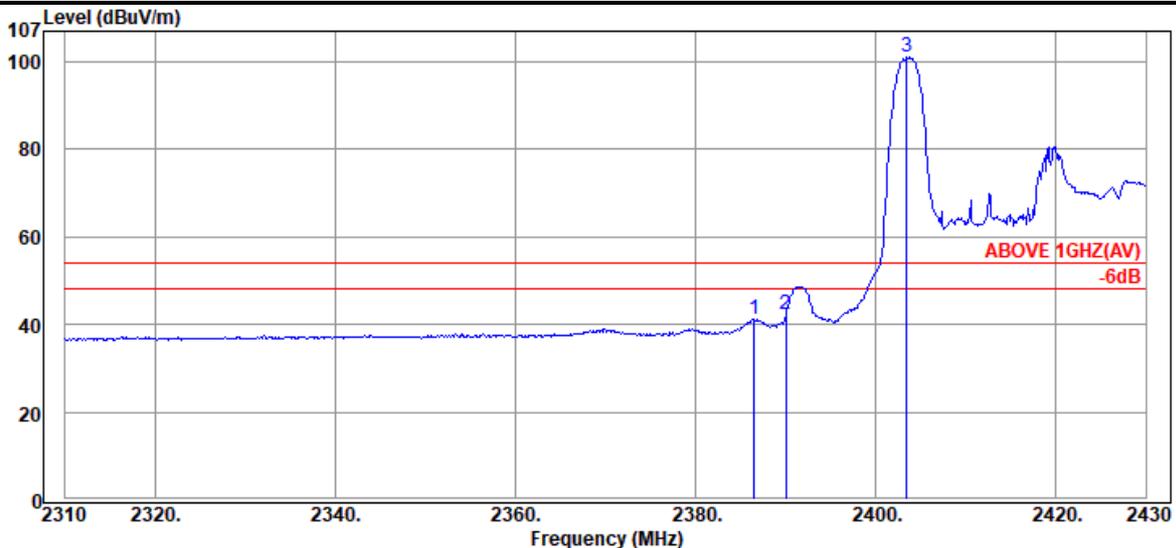


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.56	28.29	6.02	6.88	41.19	54.00	12.81	Average
2390.04	28.32	6.03	7.78	42.13	54.00	11.87	Average
@ 2403.48	28.41	6.04	66.52	100.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Config	26/0

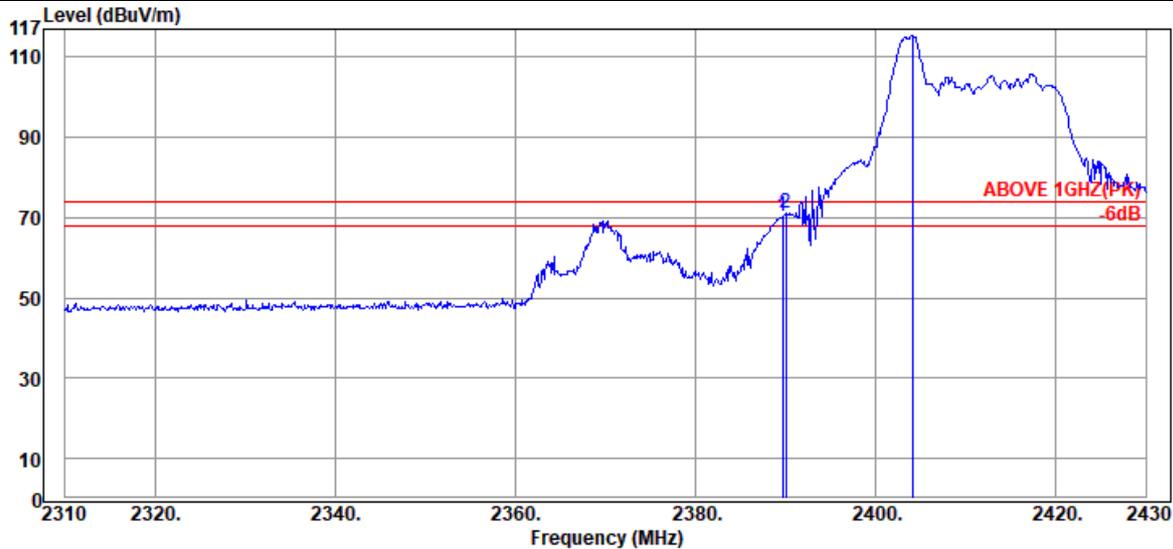

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	36.14	70.48	74.00	3.52	Peak
2390.04	28.32	6.03	36.64	70.99	74.00	3.01	Peak
@ 2404.08	28.41	6.04	81.05	115.50	---	---	Peak

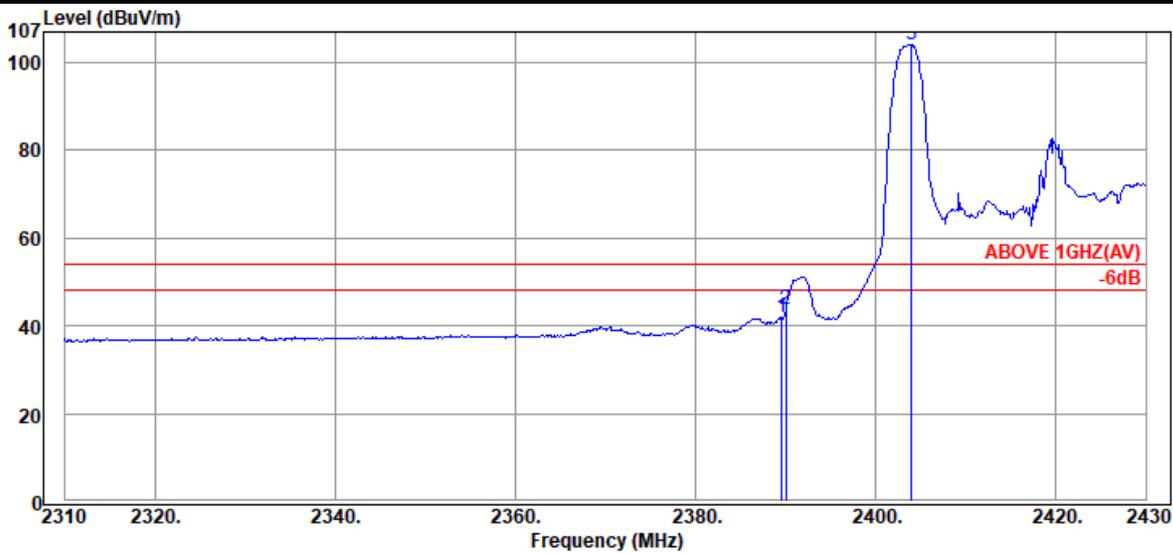


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	7.57	41.91	54.00	12.09	Average
2390.04	28.32	6.03	9.29	43.64	54.00	10.36	Average
@ 2403.96	28.41	6.04	69.70	104.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Config	52/37

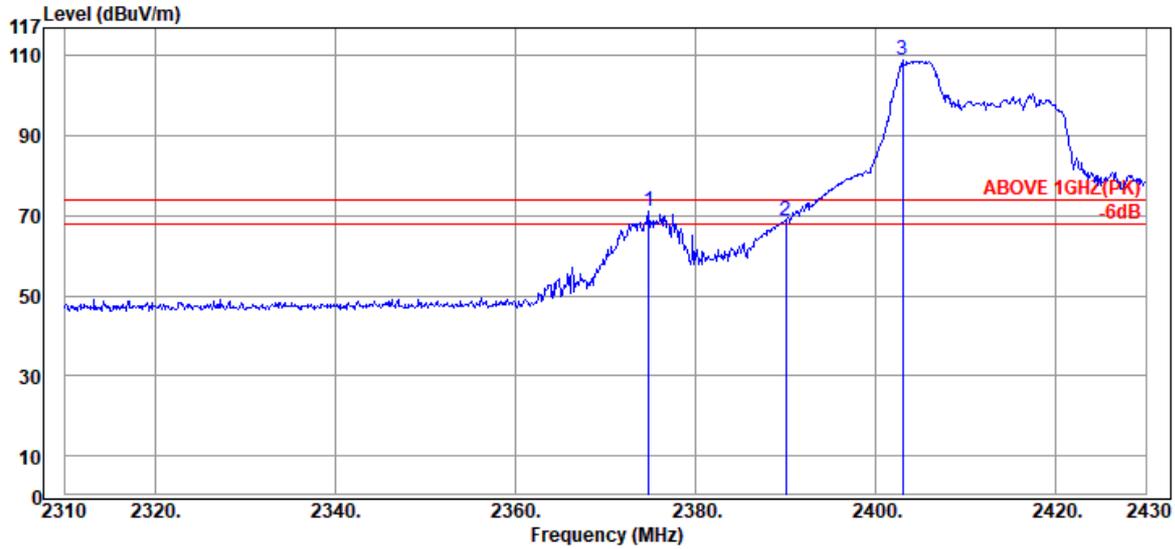

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.80	28.20	6.01	36.89	71.10	74.00	2.90	Peak
2390.04	28.32	6.03	34.58	68.93	74.00	5.07	Peak
@ 2403.00	28.41	6.04	74.48	108.93	---	---	Peak

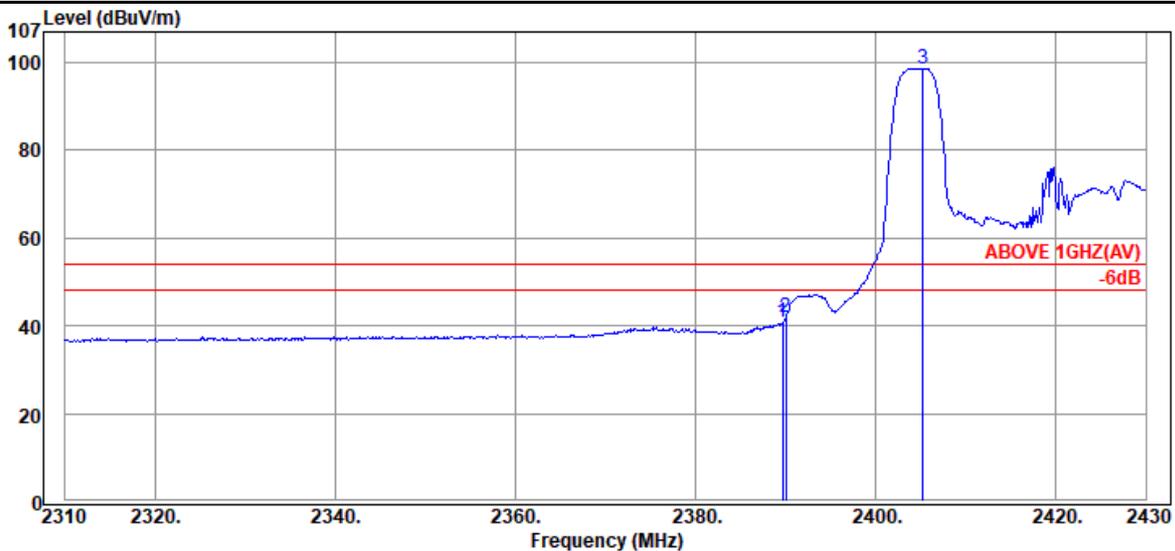


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	6.40	40.74	54.00	13.26	Average
2390.04	28.32	6.03	7.52	41.87	54.00	12.13	Average
@ 2405.28	28.41	6.04	64.25	98.70	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Config	52/37

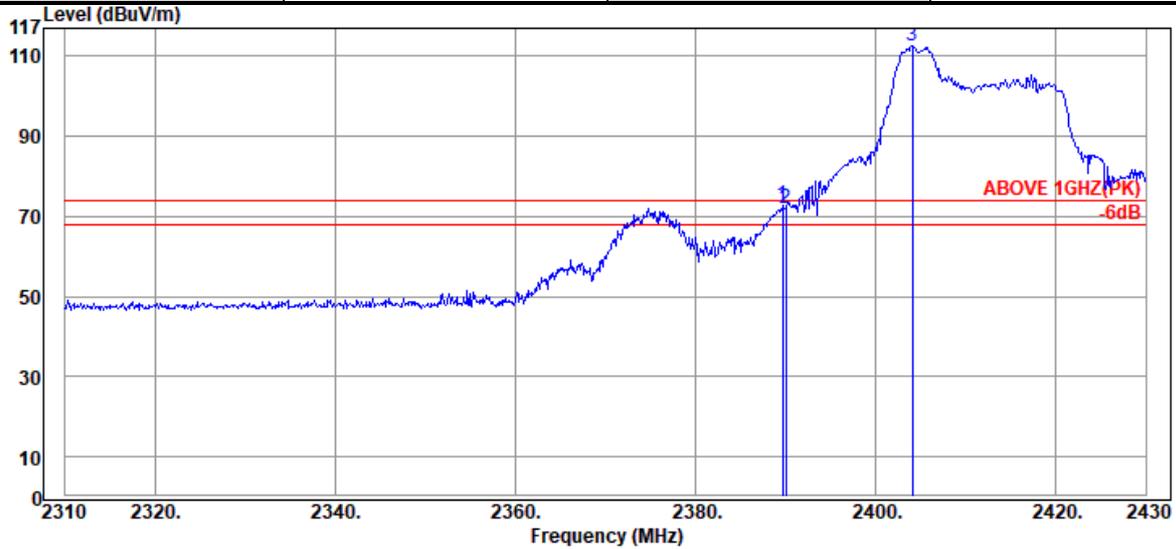

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	38.29	72.63	74.00	1.37	Peak
2390.04	28.32	6.03	37.80	72.15	74.00	1.85	Peak
@ 2404.08	28.41	6.04	78.13	112.58	---	---	Peak

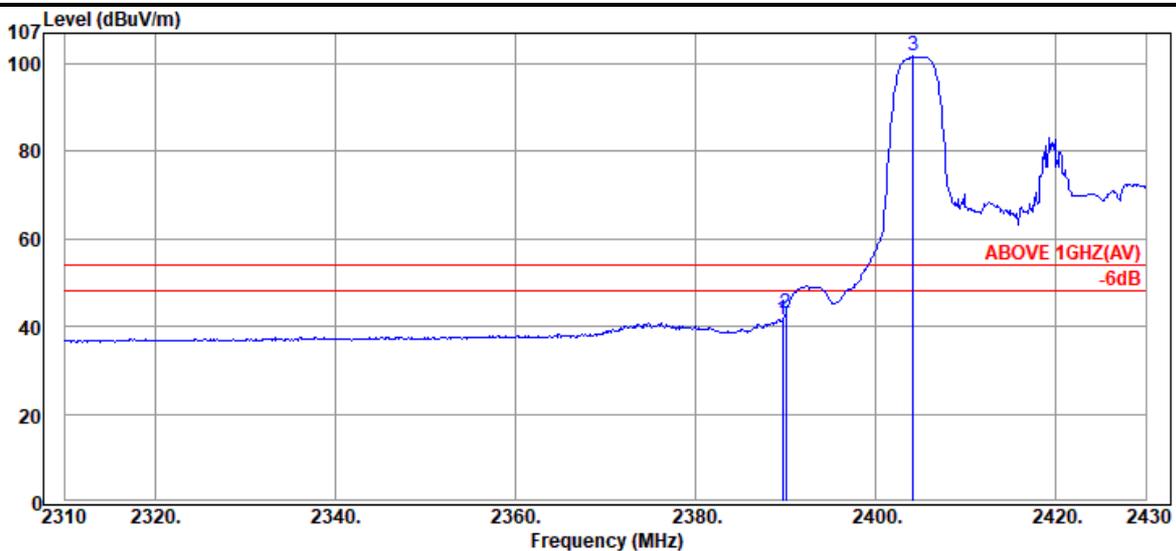


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	7.33	41.67	54.00	12.33	Average
2390.04	28.32	6.03	8.54	42.89	54.00	11.11	Average
@ 2404.20	28.41	6.04	67.27	101.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Config	106/53

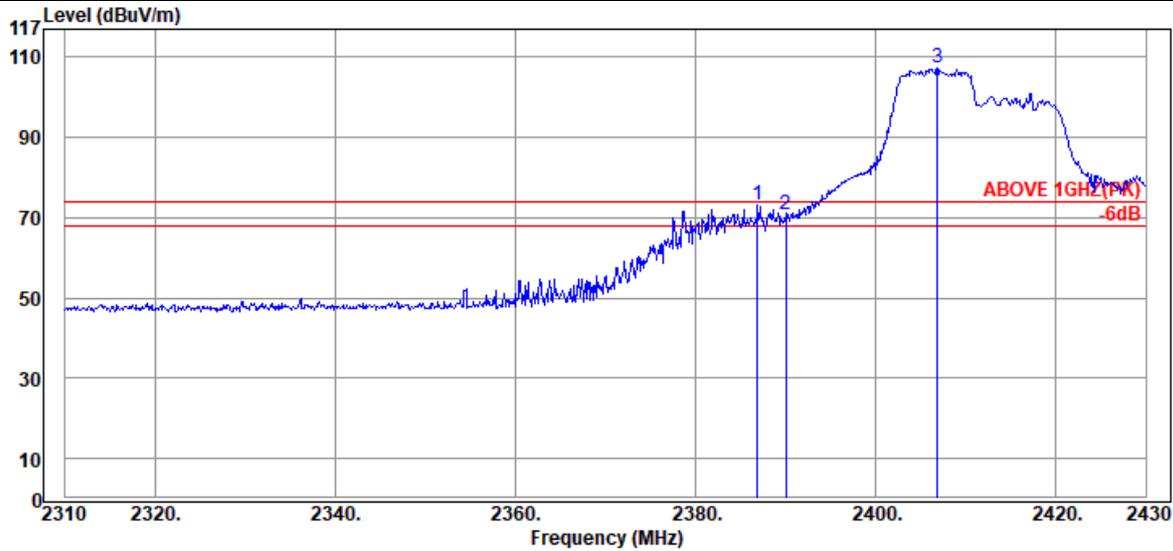

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.92	28.30	6.02	38.88	73.20	74.00	0.80	Peak
2390.04	28.32	6.03	36.48	70.83	74.00	3.17	Peak
@ 2406.84	28.41	6.04	72.72	107.17	---	---	Peak

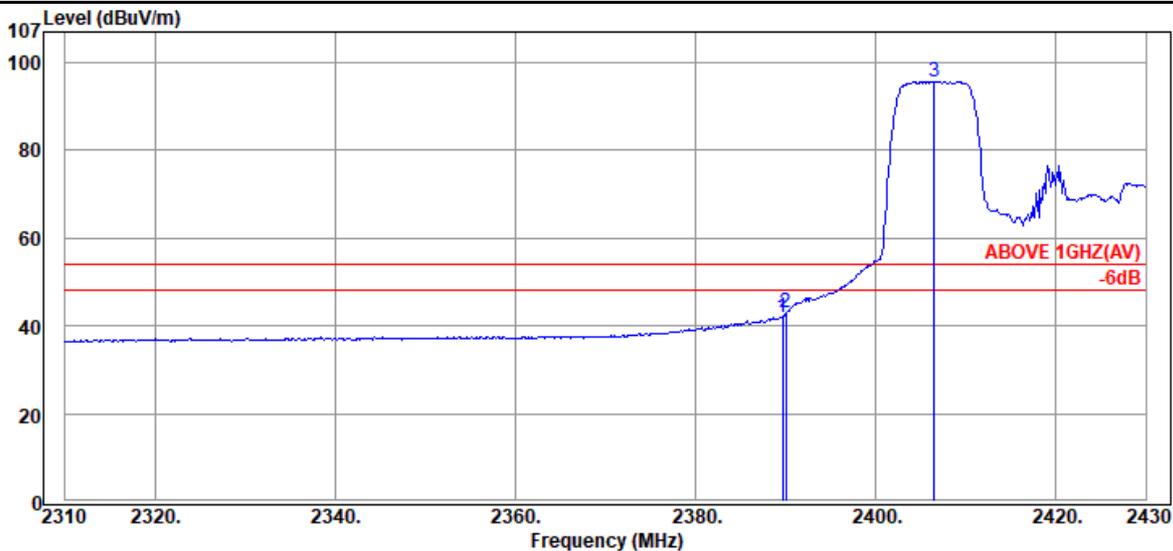


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	28.32	6.02	7.57	41.91	54.00	12.09	Average
2390.04	28.32	6.03	8.51	42.86	54.00	11.14	Average
@ 2406.48	28.41	6.04	61.18	95.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Config	106/53

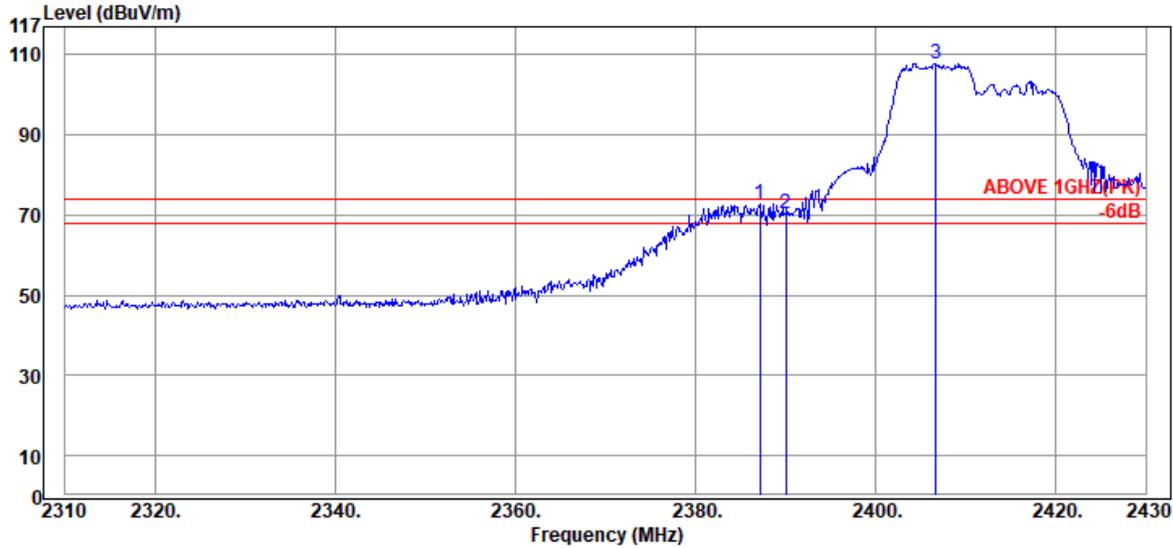

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.16	28.30	6.02	38.59	72.91	74.00	1.09	Peak
2390.04	28.32	6.03	35.93	70.28	74.00	3.72	Peak
@ 2406.72	28.41	6.04	73.48	107.93	---	---	Peak

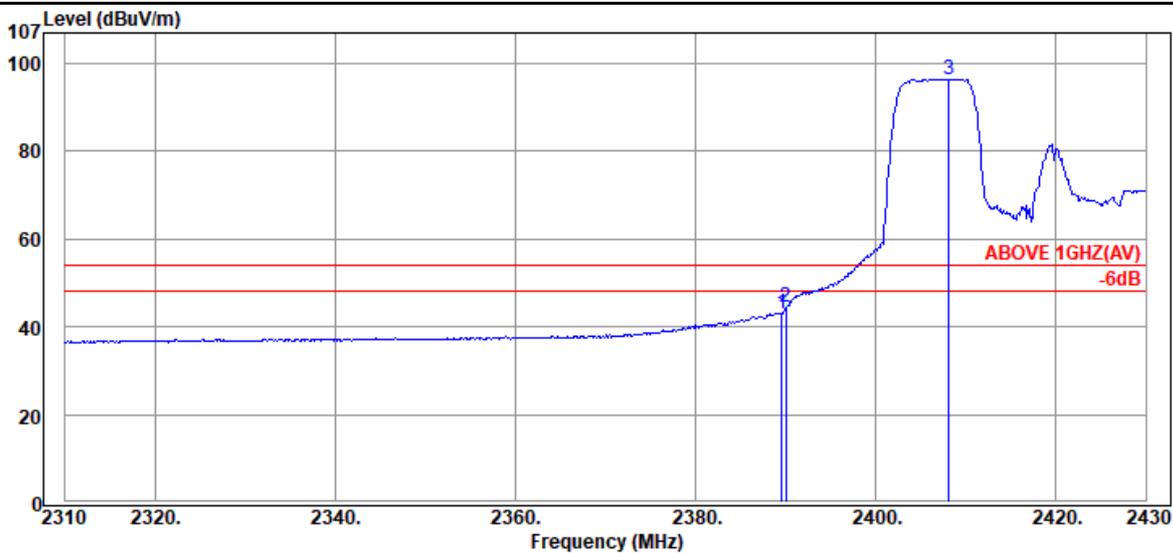


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	28.32	6.02	8.84	43.18	54.00	10.82	Average
2390.04	28.32	6.03	9.96	44.31	54.00	9.69	Average
@ 2408.16	28.42	6.05	61.99	96.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Config	26/8

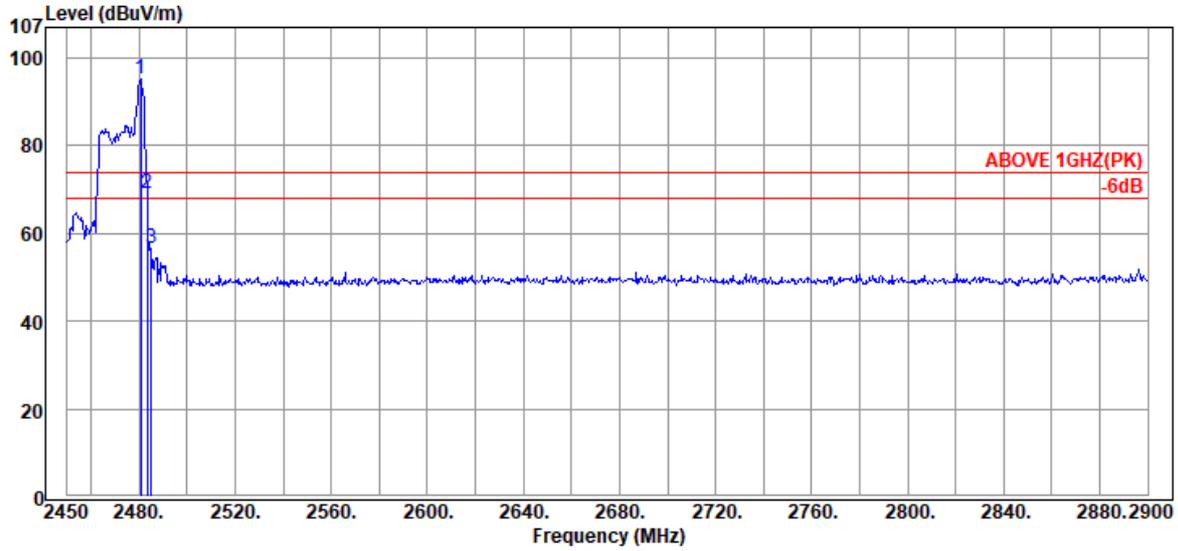

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.60	28.68	6.13	60.43	95.24	---	---	Peak
2483.30	28.70	6.13	34.43	69.26	74.00	4.74	Peak
2485.10	28.71	6.13	21.78	56.62	74.00	17.38	Peak

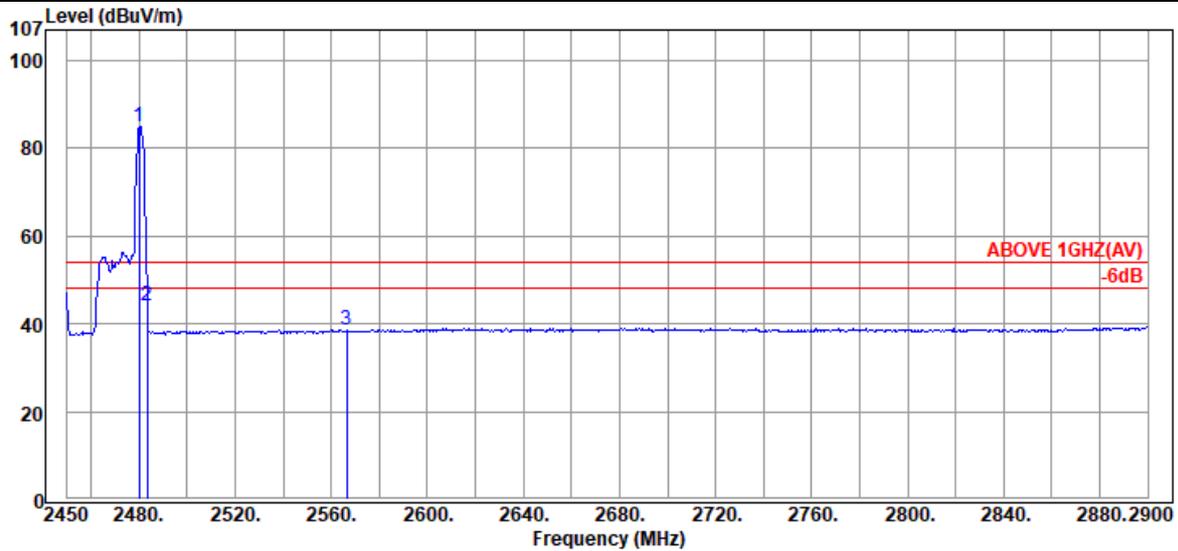


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	50.23	85.04	---	---	Average
2483.30	28.70	6.13	9.25	44.08	54.00	9.92	Average
2566.55	28.97	6.24	3.56	38.77	54.00	15.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Config	26/8

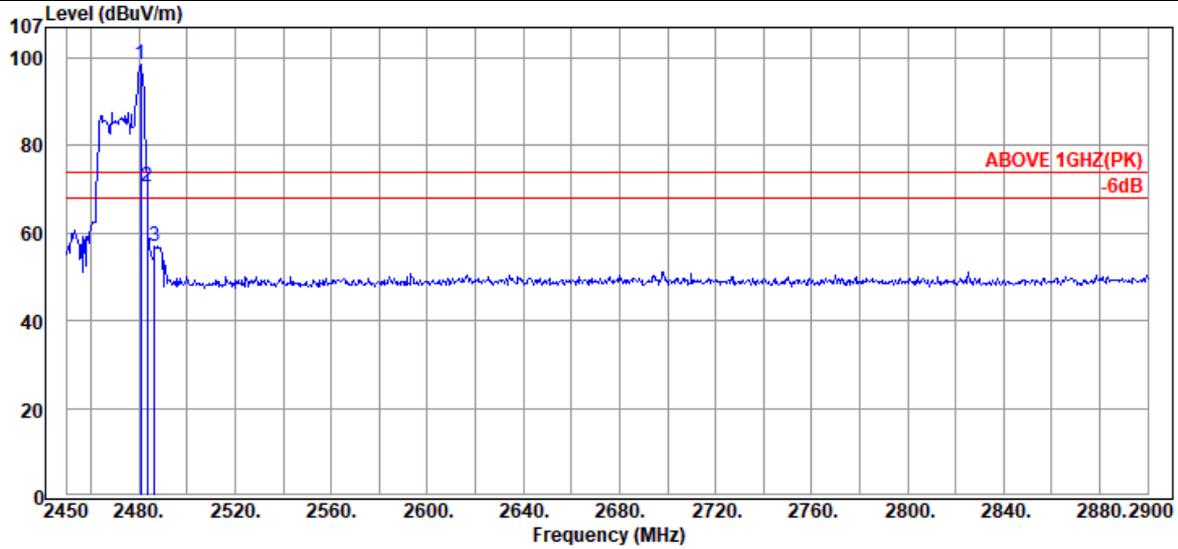

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.60	28.68	6.13	63.57	98.38	---	---	Peak
2483.30	28.70	6.13	35.63	70.46	74.00	3.54	Peak
2486.45	28.72	6.13	22.28	57.13	74.00	16.87	Peak

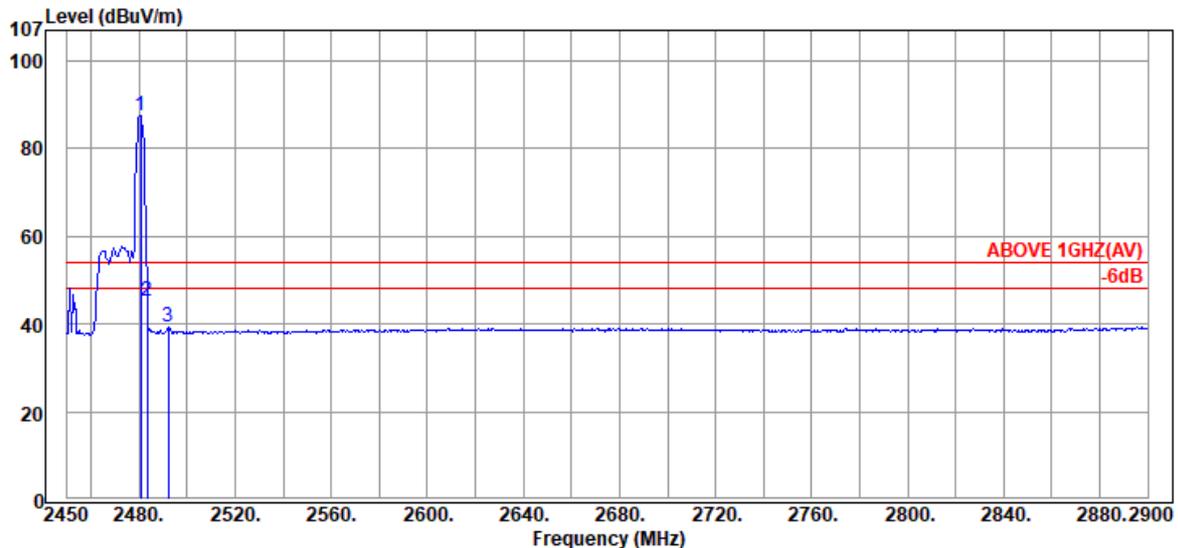


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.60	28.68	6.13	52.75	87.56	---	---	Average
2483.30	28.70	6.13	10.38	45.21	54.00	8.79	Average
2492.30	28.75	6.14	4.45	39.34	54.00	14.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Config	52/40

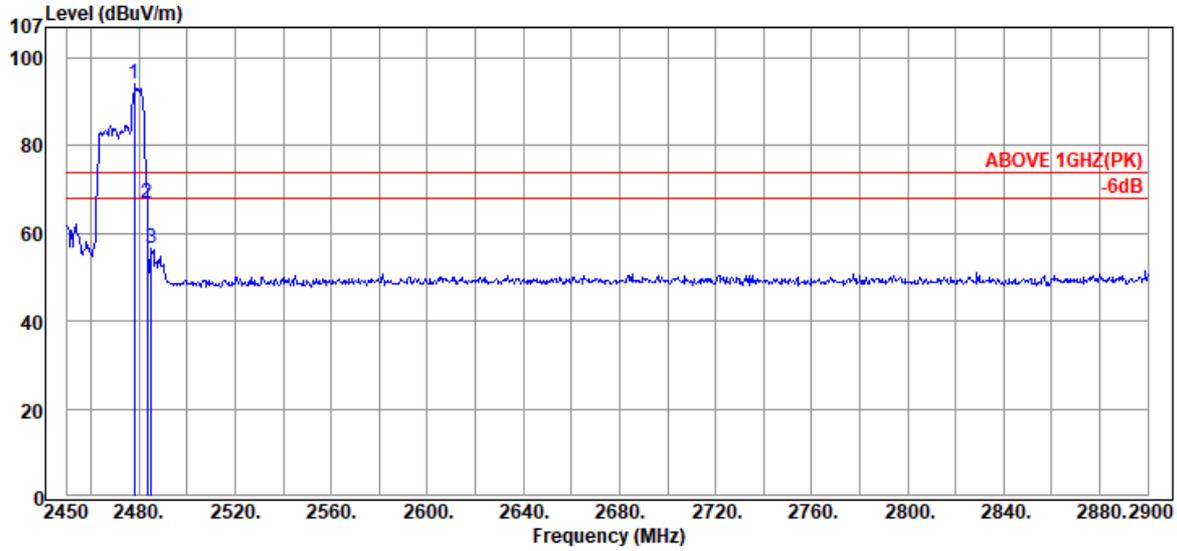

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.90	28.67	6.13	59.47	94.27	---	---	Peak
2483.30	28.70	6.13	32.01	66.84	74.00	7.16	Peak
2485.10	28.71	6.13	21.75	56.59	74.00	17.41	Peak

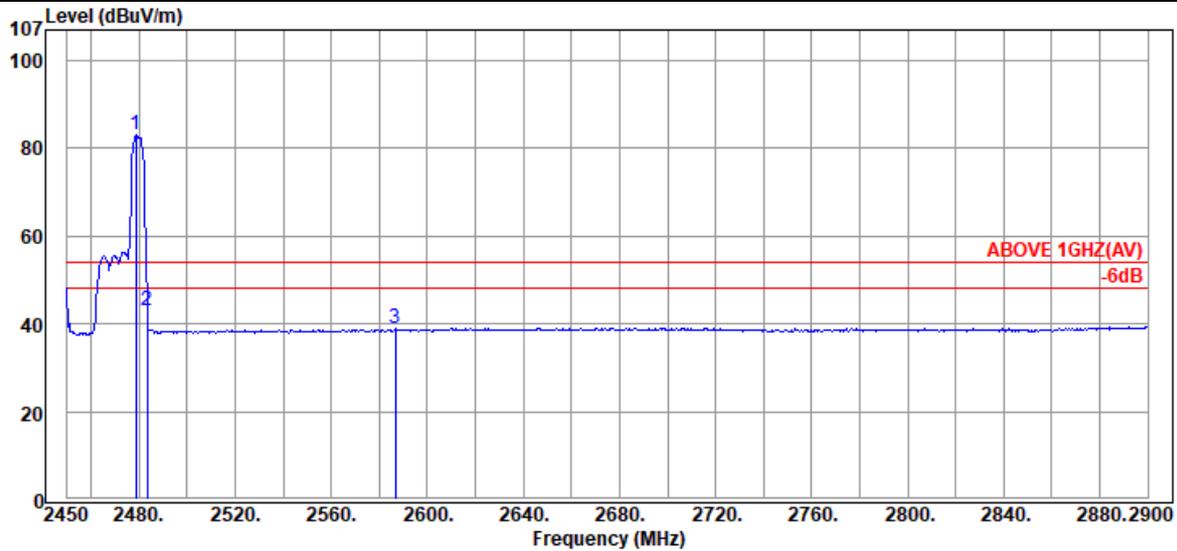


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.80	28.67	6.13	48.23	83.03	---	---	Average
2483.30	28.70	6.13	8.09	42.92	54.00	11.08	Average
2586.80	29.05	6.26	3.75	39.06	54.00	14.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Config	52/40

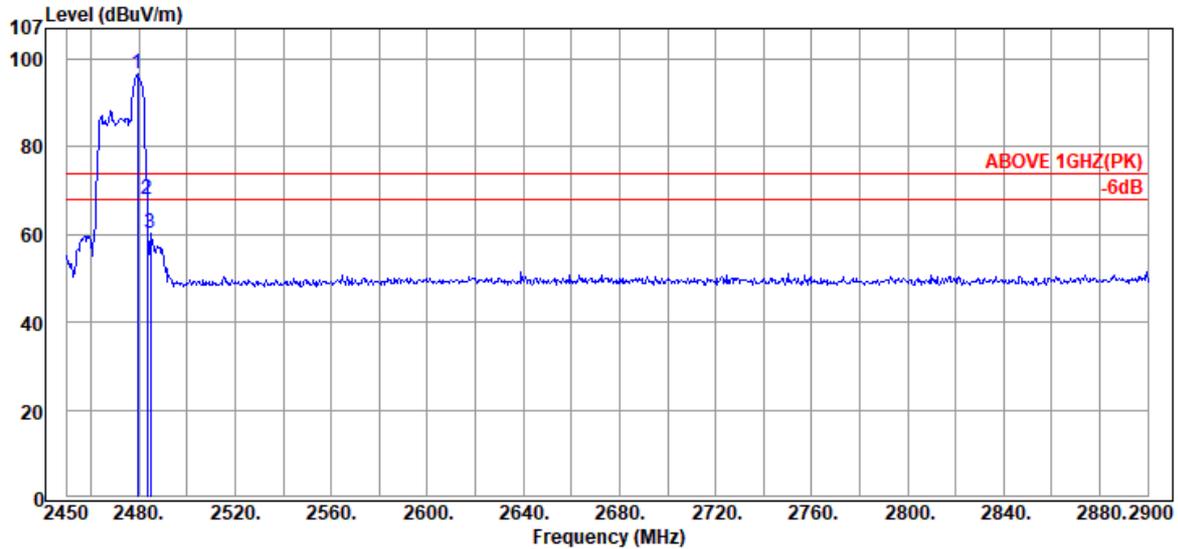

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.25	28.68	6.13	62.01	96.82	---	---	Peak
2483.30	28.70	6.13	33.02	67.85	74.00	6.15	Peak
2484.65	28.71	6.13	25.28	60.12	74.00	13.88	Peak

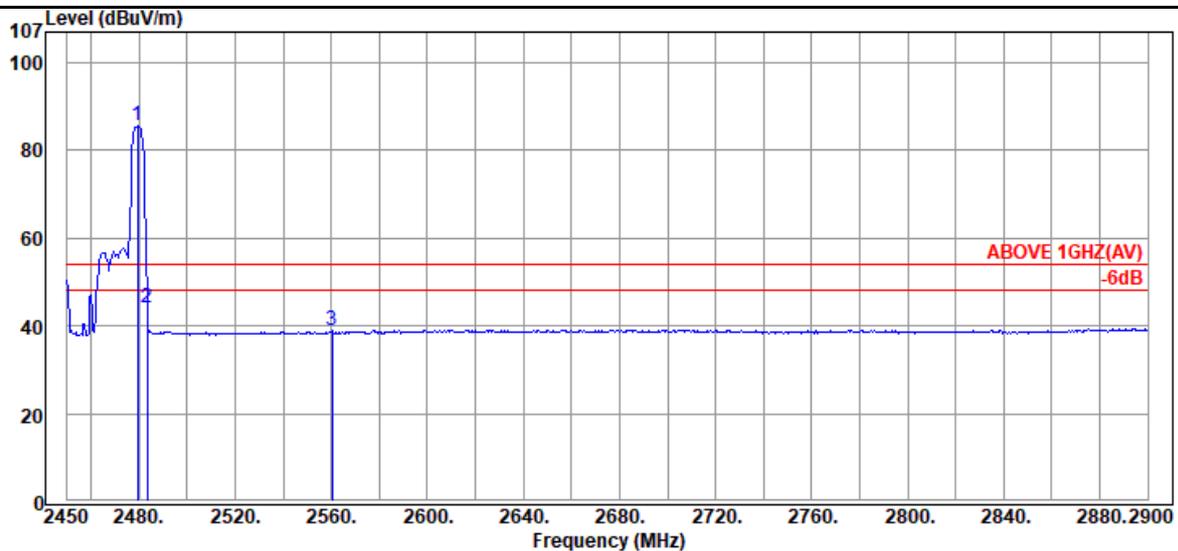


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.25	28.68	6.13	50.82	85.63	---	---	Average
2483.30	28.70	6.13	9.45	44.28	54.00	9.72	Average
2560.25	28.94	6.23	3.86	39.03	54.00	14.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Config	106/54

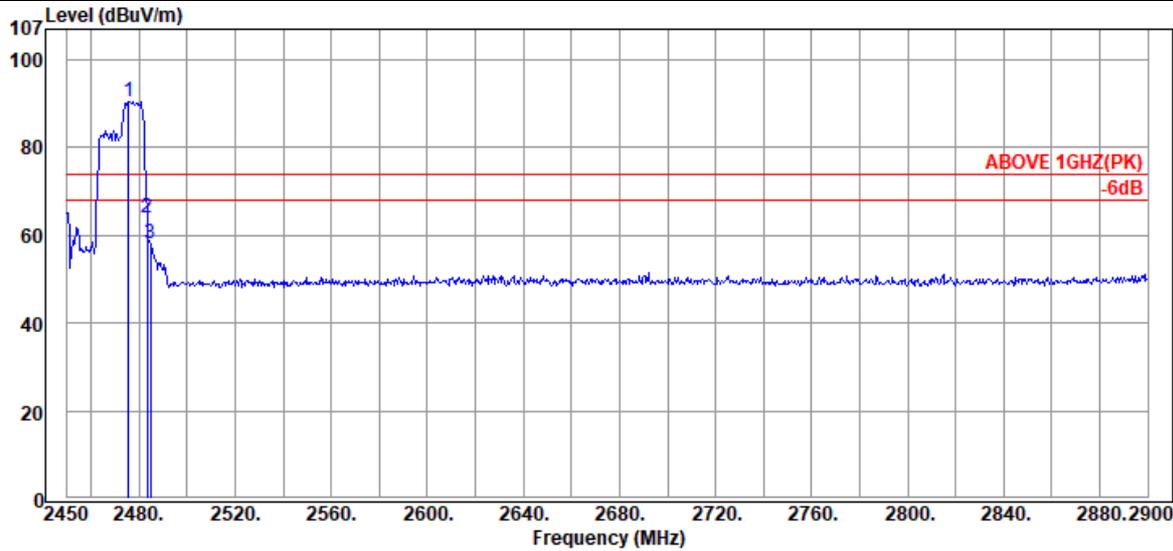

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.65	28.65	6.12	55.71	90.48	---	---	Peak
2483.30	28.70	6.13	29.28	64.11	74.00	9.89	Peak
2484.65	28.71	6.13	23.28	58.12	74.00	15.88	Peak

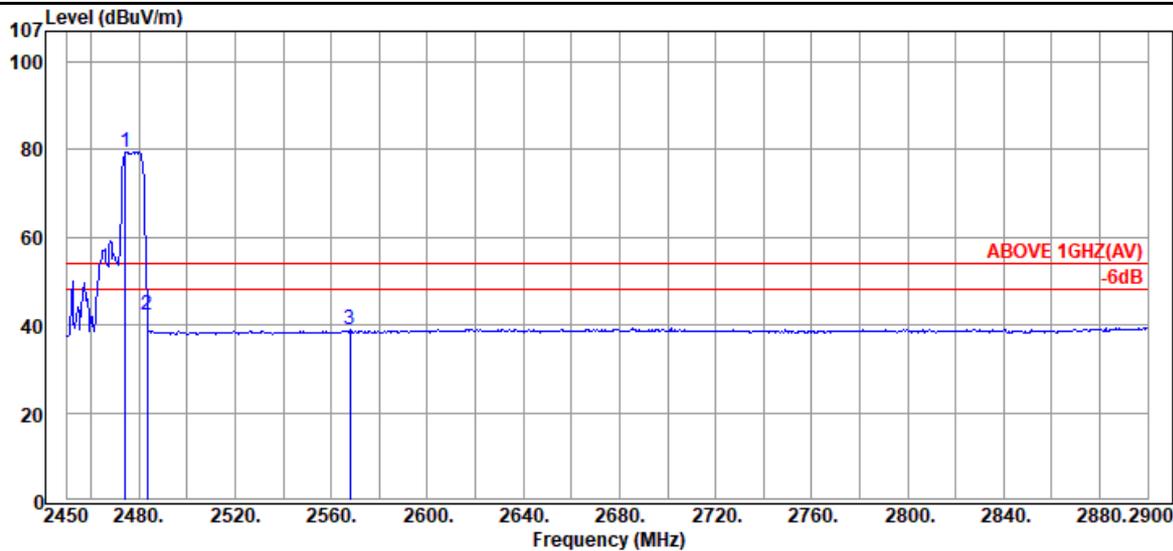


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.30	28.65	6.12	44.74	79.51	---	---	Average
2483.30	28.70	6.13	7.48	42.31	54.00	11.69	Average
2567.90	28.97	6.24	3.58	38.79	54.00	15.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Config	106/54

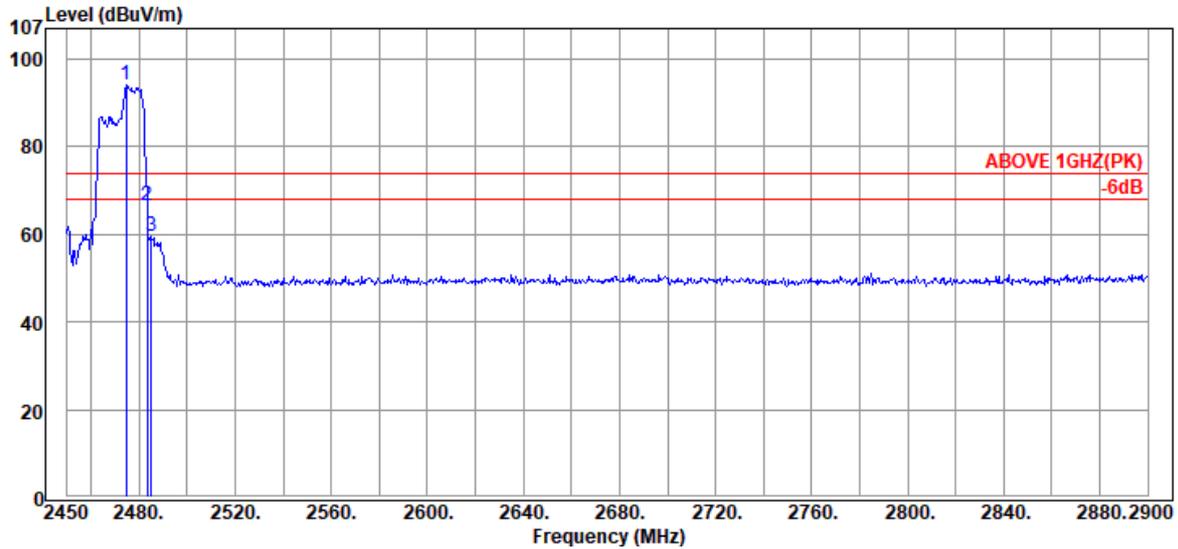

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.75	28.65	6.12	59.40	94.17	---	---	Peak
2483.30	28.70	6.13	31.65	66.48	74.00	7.52	Peak
2485.10	28.71	6.13	24.70	59.54	74.00	14.46	Peak

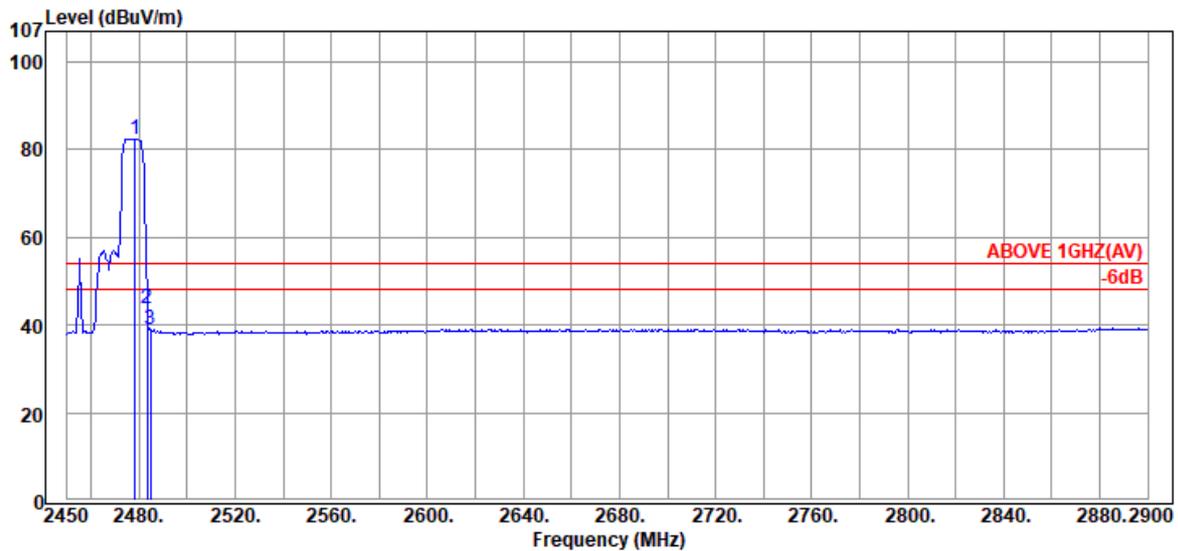


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.35	28.67	6.13	47.69	82.49	---	---	Average
2483.30	28.70	6.13	9.05	43.88	54.00	10.12	Average
2484.65	28.71	6.13	4.20	39.04	54.00	14.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Config	242/61

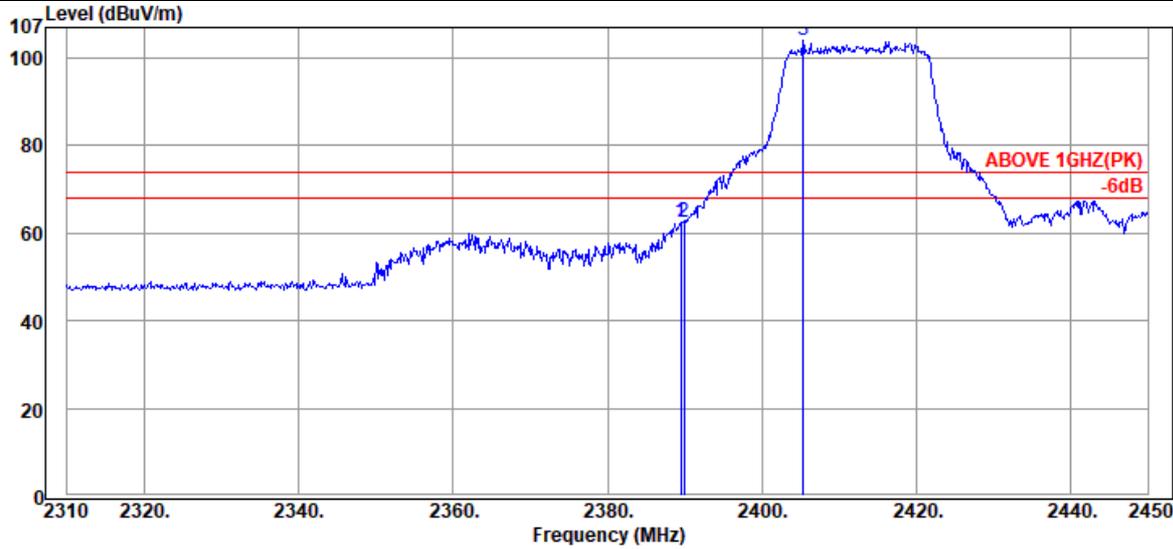

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	28.07	62.41	74.00	11.59	Peak
2389.94	28.32	6.02	28.21	62.55	74.00	11.45	Peak
@ 2405.34	28.41	6.04	69.60	104.05	---	---	Peak

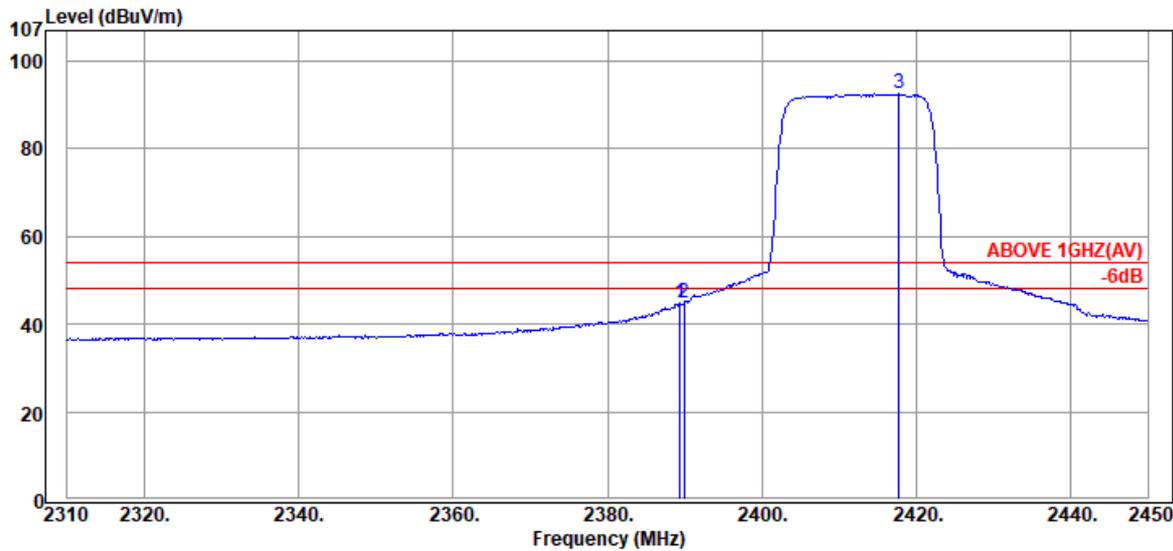


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	28.32	6.02	10.38	44.72	54.00	9.28	Average
2389.94	28.32	6.02	10.64	44.98	54.00	9.02	Average
@ 2417.80	28.44	6.06	58.00	92.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Config	242/61

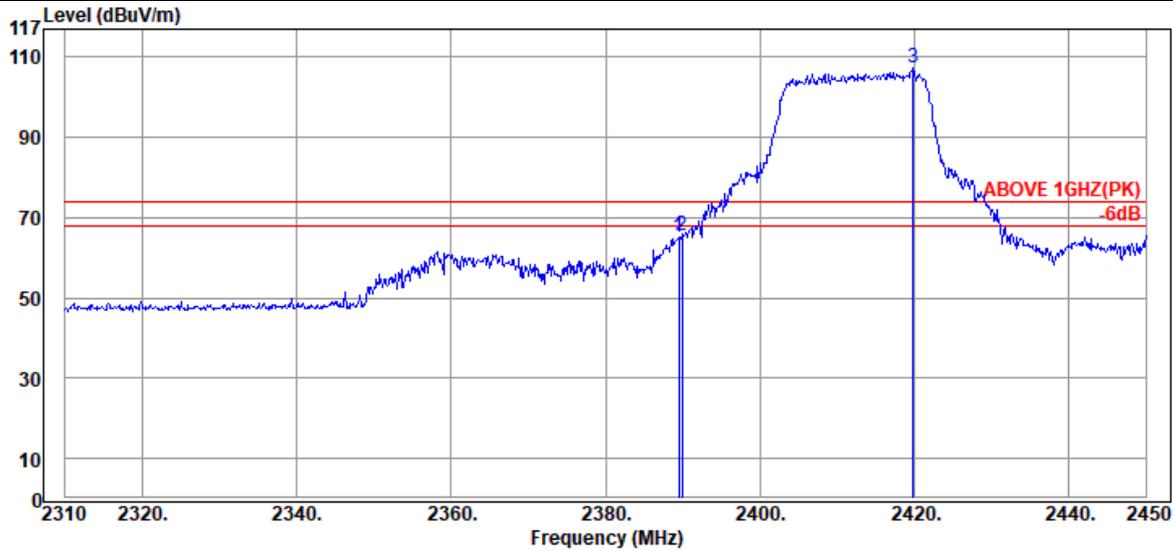

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.52	28.32	6.02	30.66	65.00	74.00	9.00	Peak
2389.94	28.32	6.02	31.02	65.36	74.00	8.64	Peak
@ 2419.90	28.44	6.06	73.04	107.54	---	---	Peak

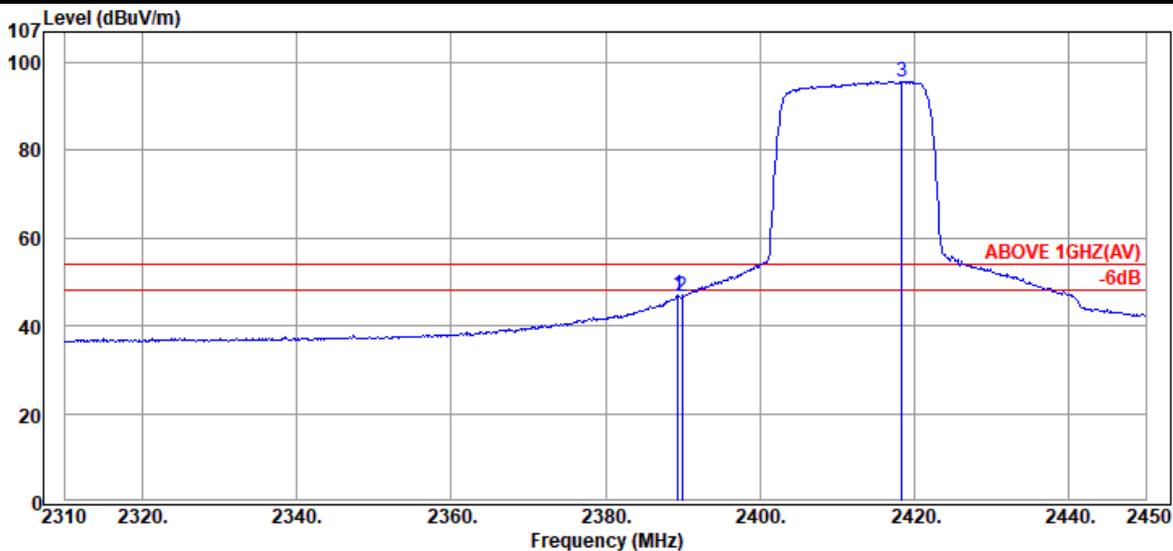


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	28.32	6.02	12.72	47.06	54.00	6.94	Average
2389.94	28.32	6.02	12.41	46.75	54.00	7.25	Average
@ 2418.36	28.44	6.06	61.21	95.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Config	242/62

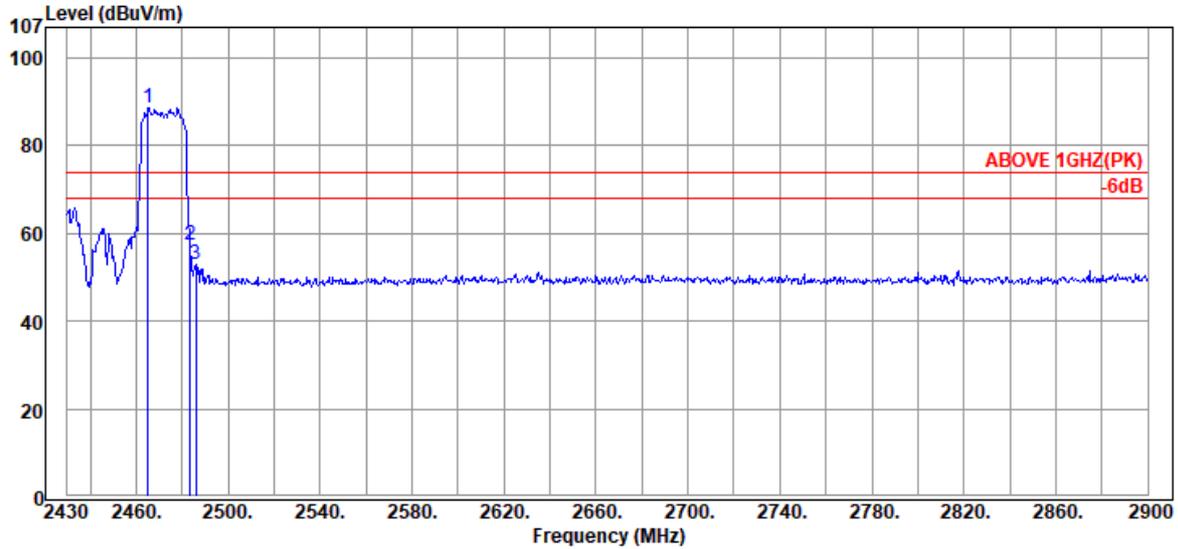

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.25	28.59	6.11	54.02	88.72	---	---	Peak
2483.58	28.70	6.13	22.41	57.24	74.00	16.76	Peak
2485.93	28.72	6.13	18.19	53.04	74.00	20.96	Peak

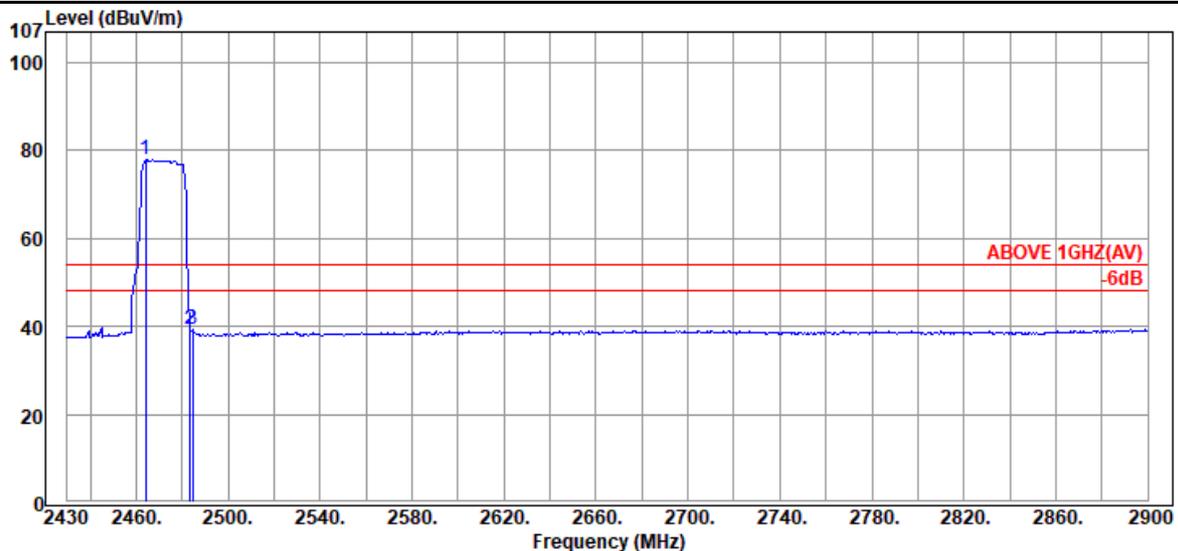


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.31	28.59	6.11	43.12	77.82	---	---	Average
2483.58	28.70	6.13	4.68	39.51	54.00	14.49	Average
2484.52	28.71	6.13	4.34	39.18	54.00	14.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Config	242/62

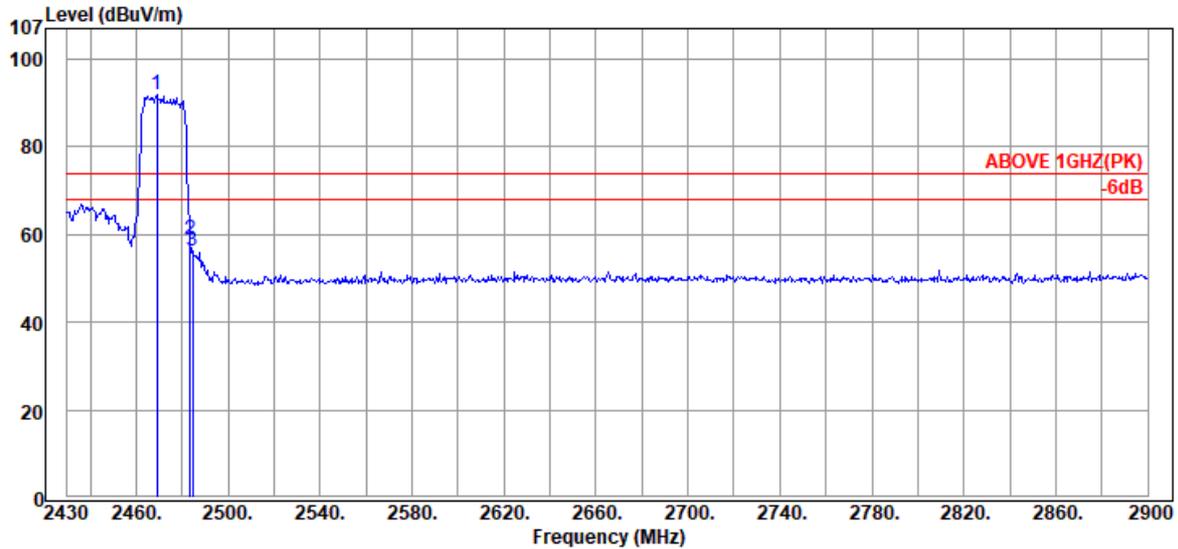

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.01	28.61	6.12	57.08	91.81	---	---	Peak
2483.58	28.70	6.13	24.13	58.96	74.00	15.04	Peak
2484.52	28.71	6.13	21.48	56.32	74.00	17.68	Peak

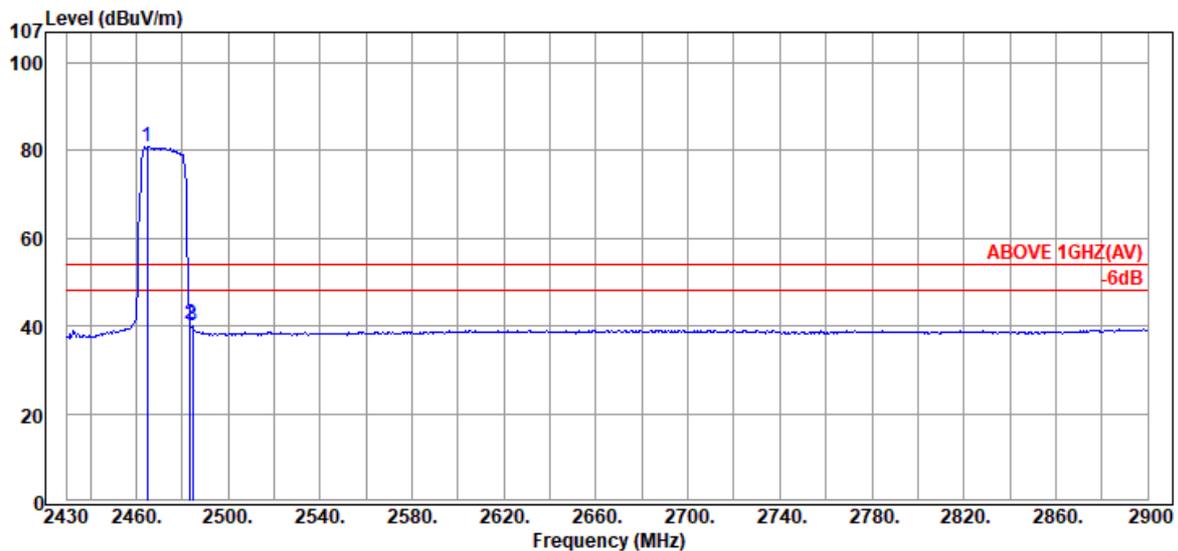

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.78	28.59	6.11	46.18	80.88	---	---	Average
2483.58	28.70	6.13	5.49	40.32	54.00	13.68	Average
2484.52	28.71	6.13	5.15	39.99	54.00	14.01	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

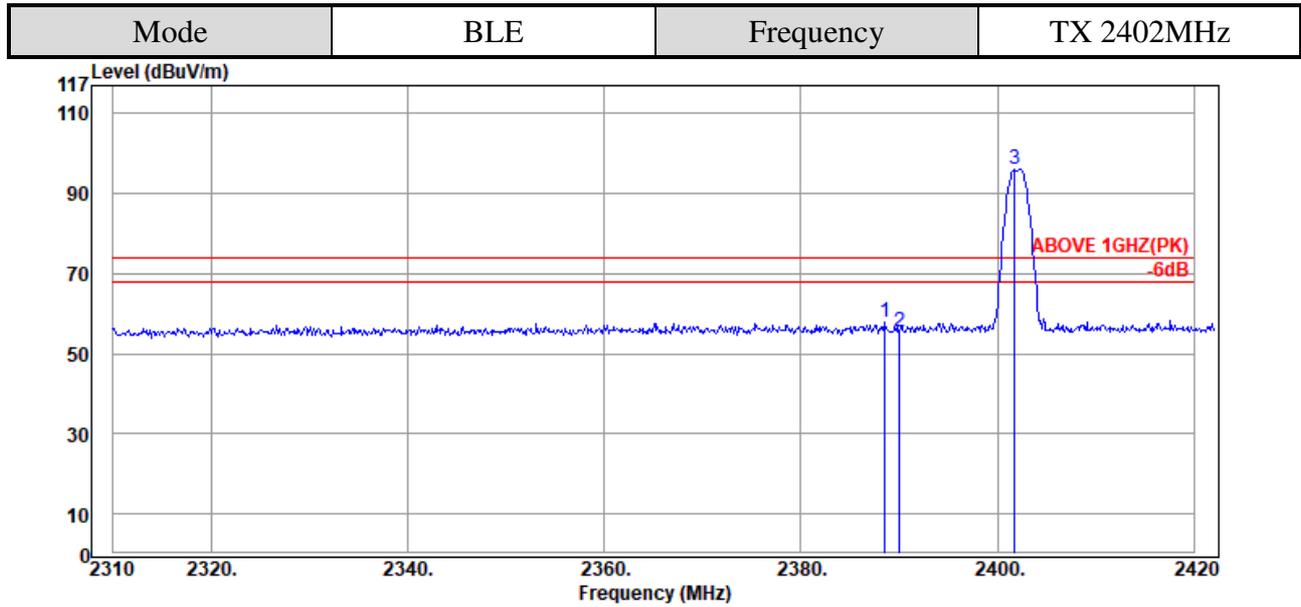

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.60	28.31	6.02	23.56	57.89	74.00	16.11	Peak
2390.04	28.32	6.03	21.32	55.67	74.00	18.33	Peak
@ 2401.80	28.40	6.04	61.51	95.95	---	---	Peak

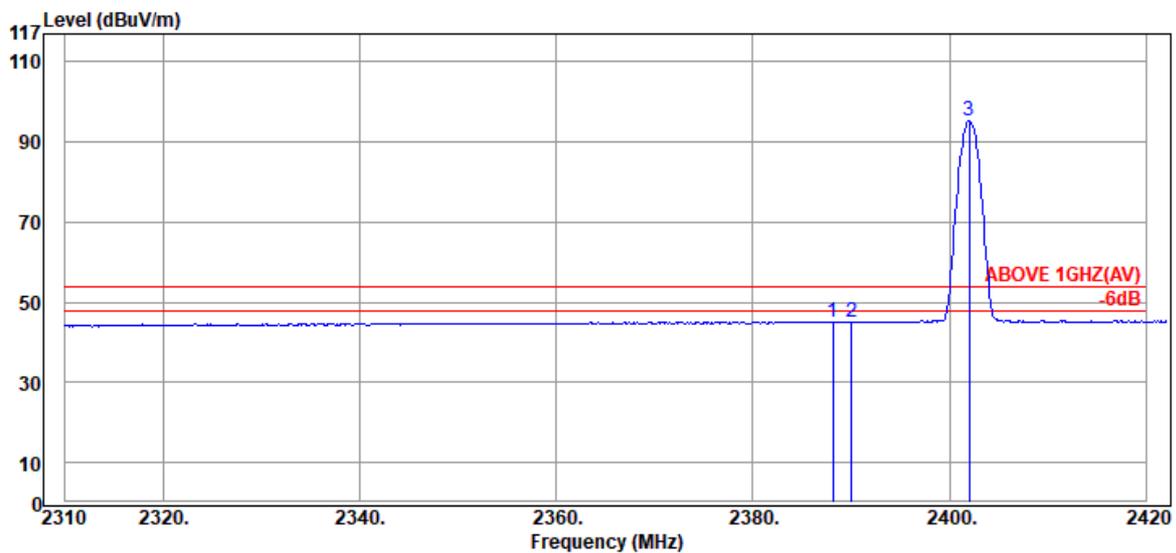

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.12	28.30	6.02	10.89	45.21	54.00	8.79	Average
2390.04	28.32	6.03	10.65	45.00	54.00	9.00	Average
@ 2402.04	28.40	6.04	60.71	95.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

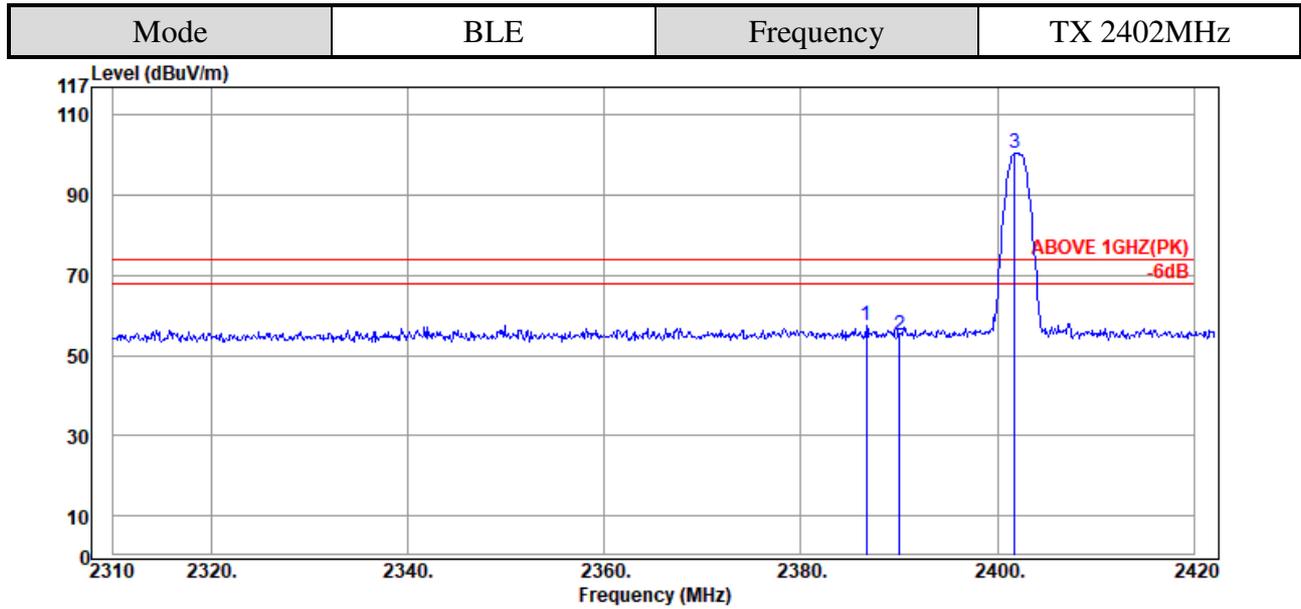

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.68	28.29	6.02	23.24	57.55	74.00	16.45	Peak
2390.04	28.32	6.03	20.63	54.98	74.00	19.02	Peak
@ 2401.80	28.40	6.04	65.91	100.35	---	---	Peak

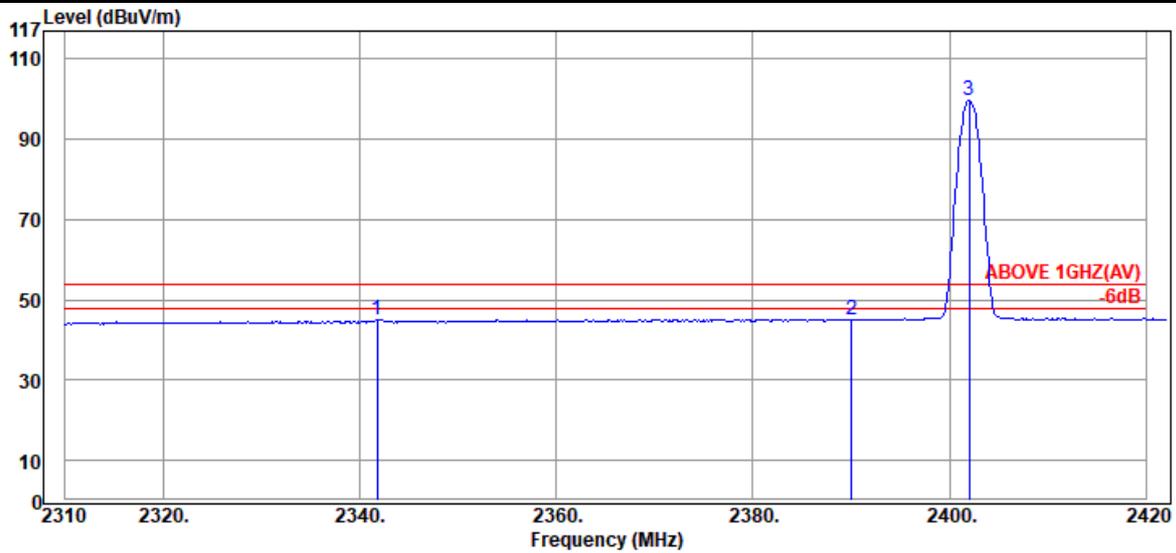


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.80	27.97	5.97	11.24	45.18	54.00	8.82	Average
2390.04	28.32	6.03	10.67	45.02	54.00	8.98	Average
@ 2402.04	28.40	6.04	65.35	99.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

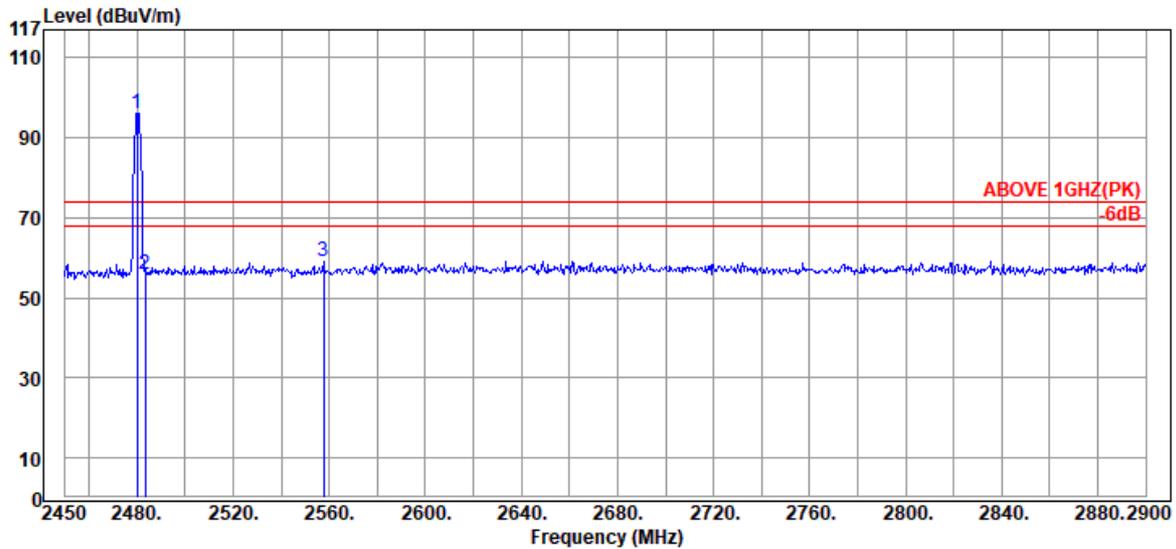

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	61.43	96.24	---	---	Peak
2483.30	28.70	6.13	21.15	55.98	74.00	18.02	Peak
2557.55	28.93	6.23	23.90	59.06	74.00	14.94	Peak

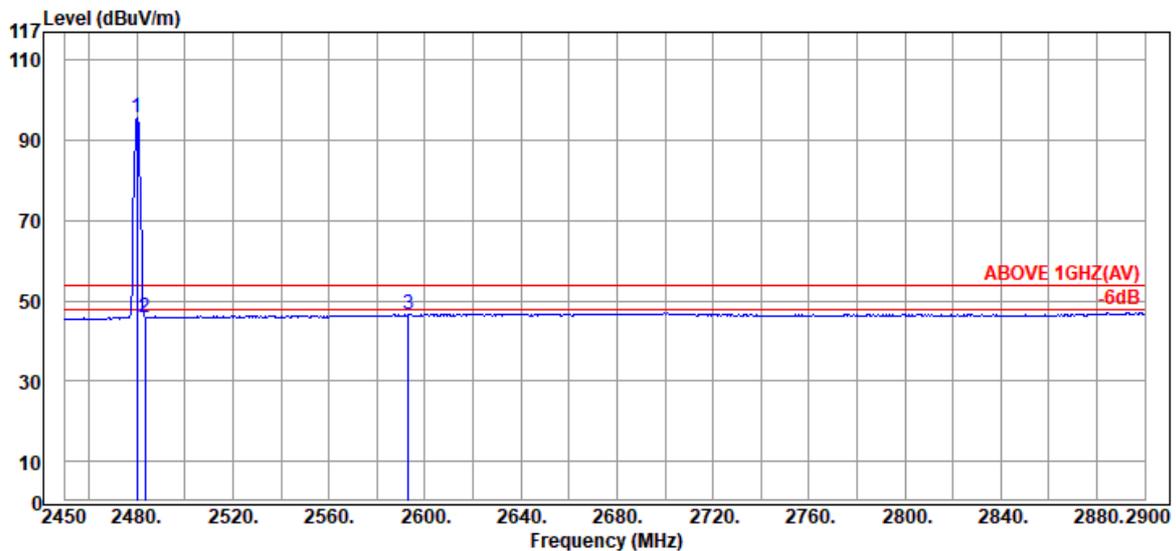


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	60.70	95.51	---	---	Average
2483.30	28.70	6.13	10.95	45.78	54.00	8.22	Average
2593.10	29.07	6.27	11.27	46.61	54.00	7.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

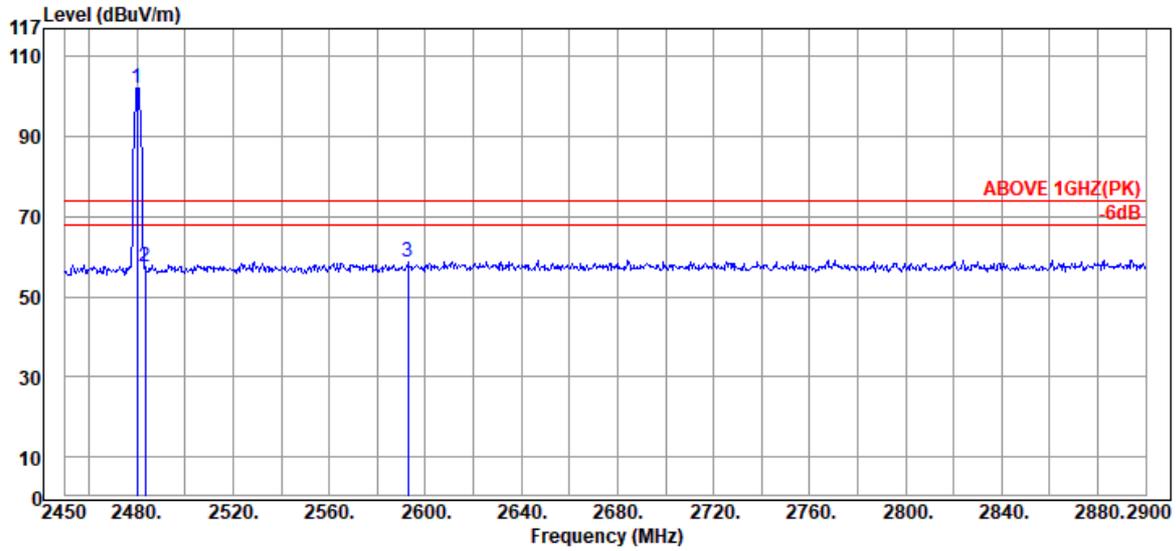

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	67.31	102.12	---	---	Peak
2483.30	28.70	6.13	22.54	57.37	74.00	16.63	Peak
2592.65	29.07	6.27	23.36	58.70	74.00	15.30	Peak

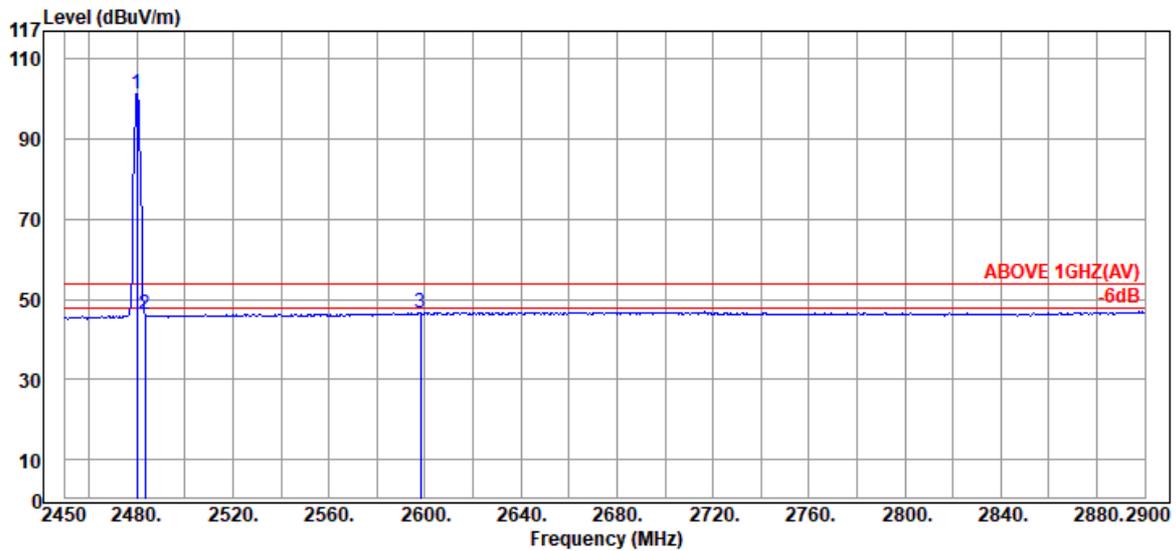

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.15	28.68	6.13	66.37	101.18	---	---	Average
2483.30	28.70	6.13	11.36	46.19	54.00	7.81	Average
2598.05	29.09	6.28	11.18	46.55	54.00	7.45	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.04	40.02	54.00	13.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	0.46	42.52	54.00	11.48	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.21	39.85	54.00	14.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.08	39.98	54.00	14.02	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-1.45	40.61	54.00	13.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-0.73	41.33	54.00	12.67	Peak

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4894.00	33.58	8.53	-1.98	40.13	54.00	13.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4894.00	33.58	8.53	-1.03	41.08	54.00	12.92	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.81	39.25	54.00	14.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-1.34	40.72	54.00	13.28	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.15	39.91	54.00	14.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4884.00	33.54	8.52	-2.44	39.62	54.00	14.38	Peak

Mode	BLE	Frequency	TX 2402MHz				
------	-----	-----------	------------	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	33.31	8.44	-2.34	39.41	54.00	14.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	33.31	8.44	-2.53	39.22	54.00	14.78	Peak

Mode	BLE	Frequency	TX 2440MHz				
------	-----	-----------	------------	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	33.52	8.52	-2.88	39.16	54.00	14.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	33.52	8.52	-1.52	40.52	54.00	13.48	Peak

Mode	BLE	Frequency	TX 2480MHz				
------	-----	-----------	------------	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	33.72	8.60	-0.90	41.42	54.00	12.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	33.72	8.60	-1.61	40.71	54.00	13.29	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 6dB/OCCUPIED BANDWIDTH

Test Date	2019/09/19 ~ 25	Temp./Hum.	24~25°C/50~54%
Test Voltage	AC 120V, 60Hz (via AC Adapter)	Tested By	Martin Chen
Cable Loss	0.5dB		


A.3.1 Emission Bandwidth Result


Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11b	2412	10.14	13.386	>500kHz
	2442	10.14	13.444	
	2462	10.14	13.398	
	2472	10.14	13.854	
802.11g	2412	16.38	16.607	
	2442	16.40	16.800	
	2462	16.38	16.678	
	2472	16.38	16.370	
802.11n-HT20	2412	17.62	17.781	
	2442	17.62	17.812	
	2462	17.62	17.794	
	2472	17.62	17.594	
802.11n-HT40	2422	36.40	36.208	
	2442	36.40	36.231	
	2452	36.36	36.187	
	2462	36.36	36.106	
802.11ax-HE20	2412	18.98	18.978	
	2442	18.85	18.988	
	2462	18.85	19.011	
	2472	18.63	18.708	
802.11ax-HE40	2422	38.01	37.753	
	2442	38.02	37.729	
	2452	38.03	37.740	
	2462	37.77	37.474	


Mode	RU Config	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
802.11ax-HE20	26/0	2412	2.063	18.272	>500kHz
	52/37		14.48	18.129	
	106/53		17.19	18.198	
	26/8	2472	2.032	18.036	
	52/40		16.96	17.940	
	106/54		17.04	17.965	
802.11ax-HE40	242/61	2422	18.88	18.740	
	242/62	2462	18.58	18.513	

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE	2402	0.6760	1.0648	>500kHz
	2440	0.6844	1.0613	
	2480	0.6956	1.0633	

A.3.2 Measurement Plots

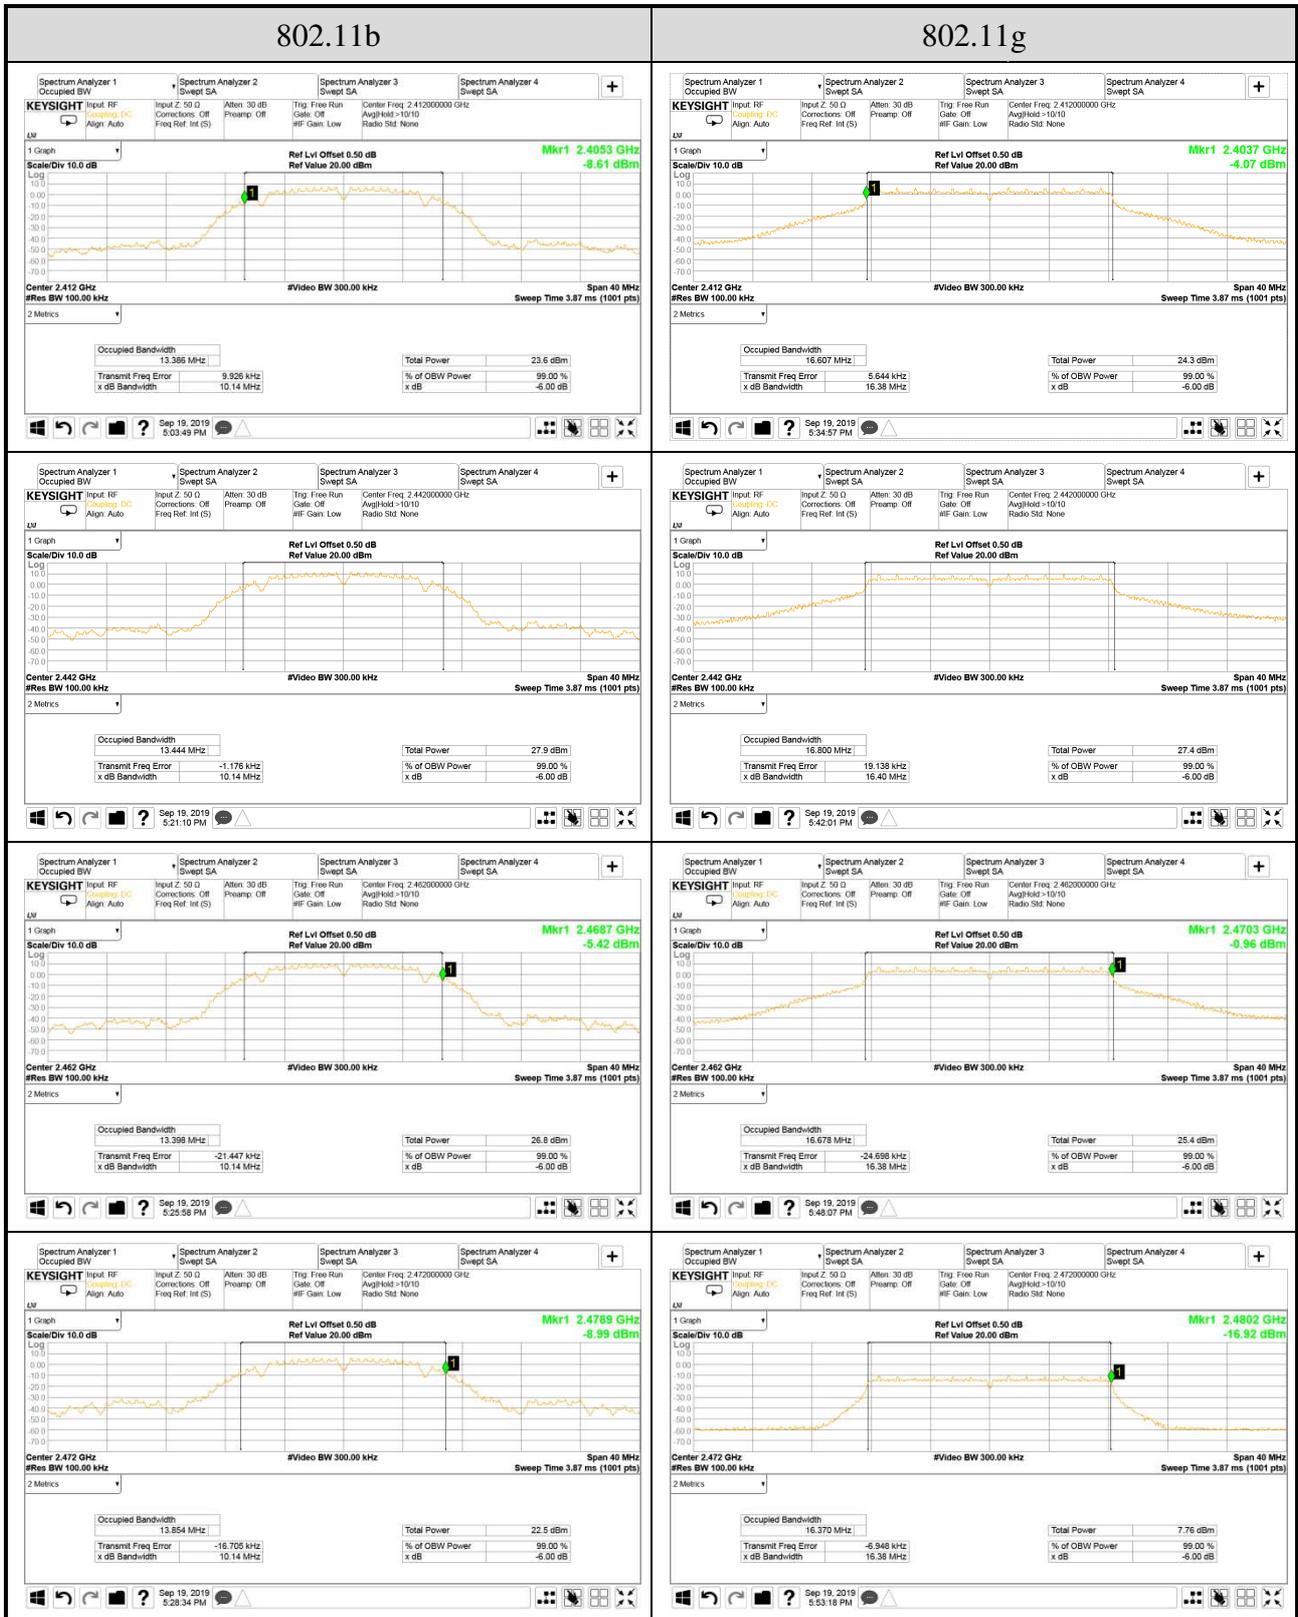

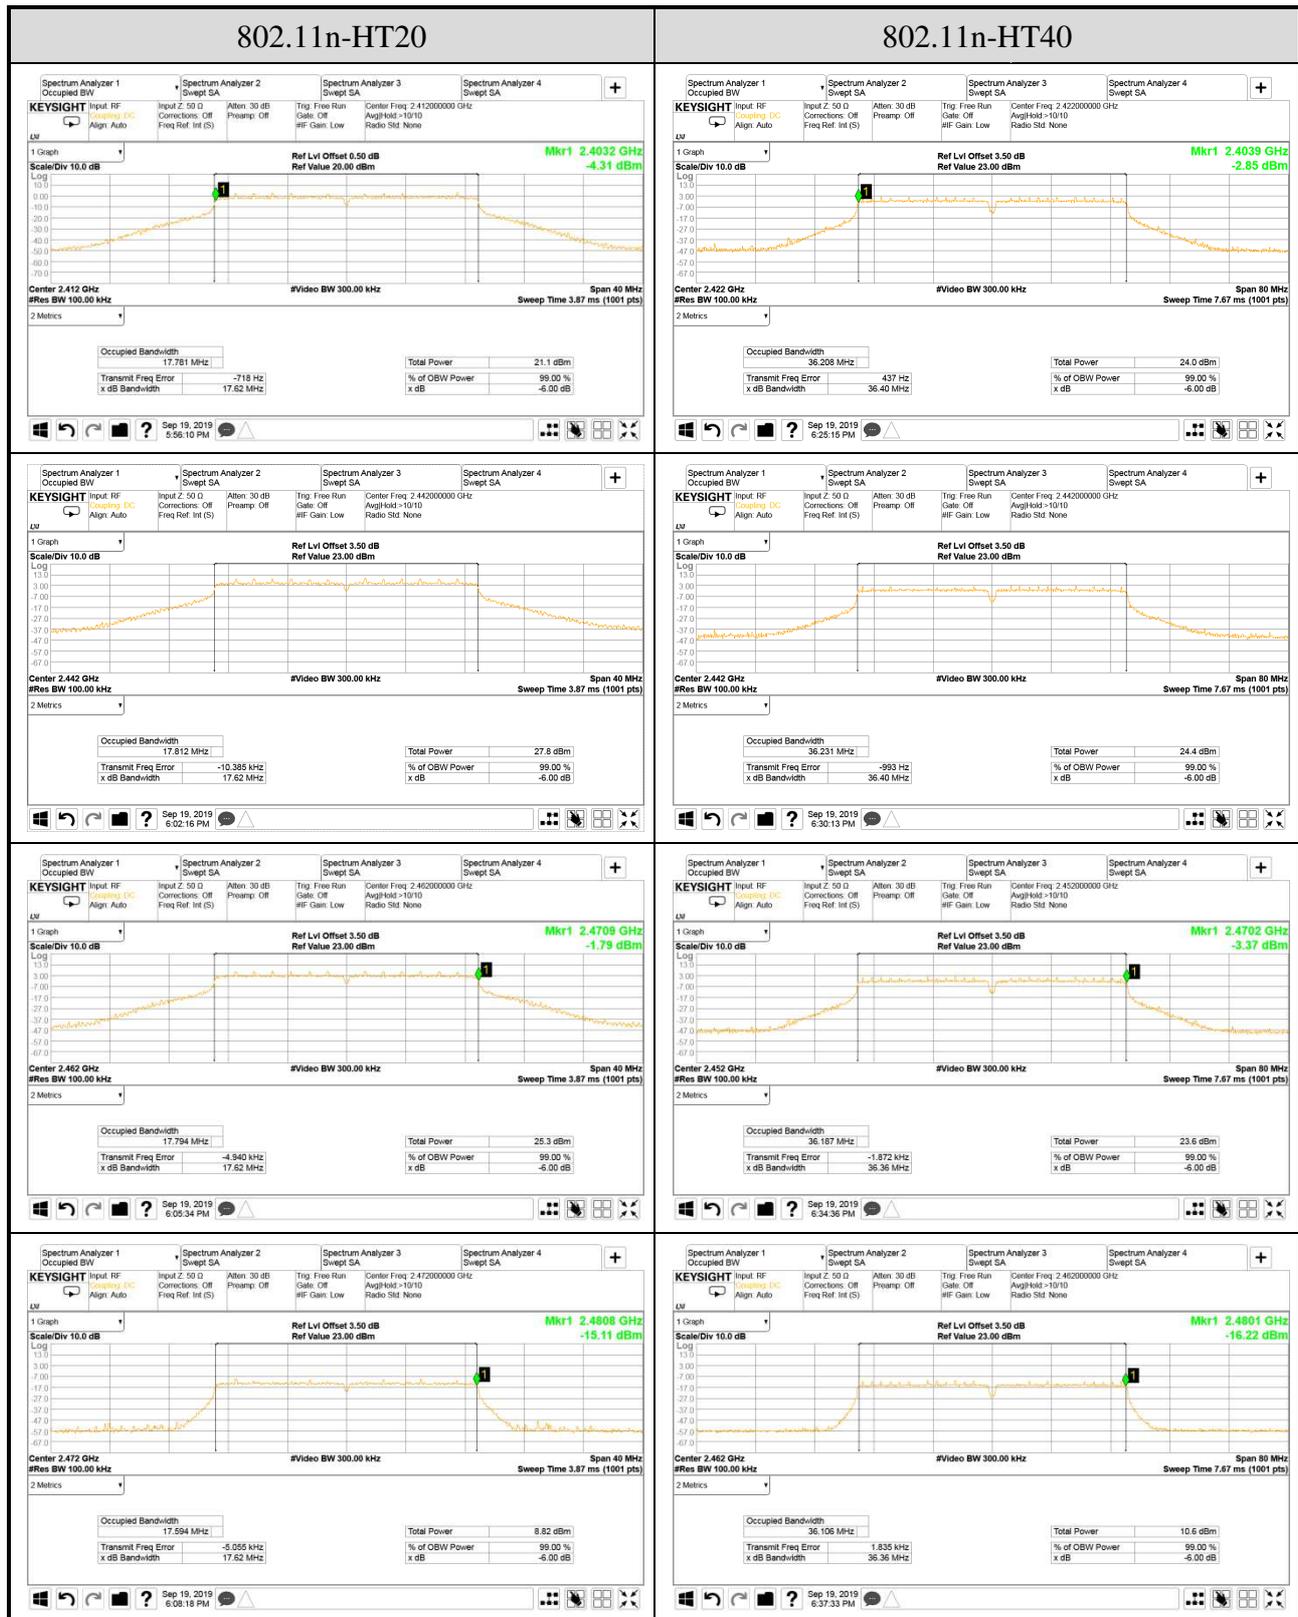

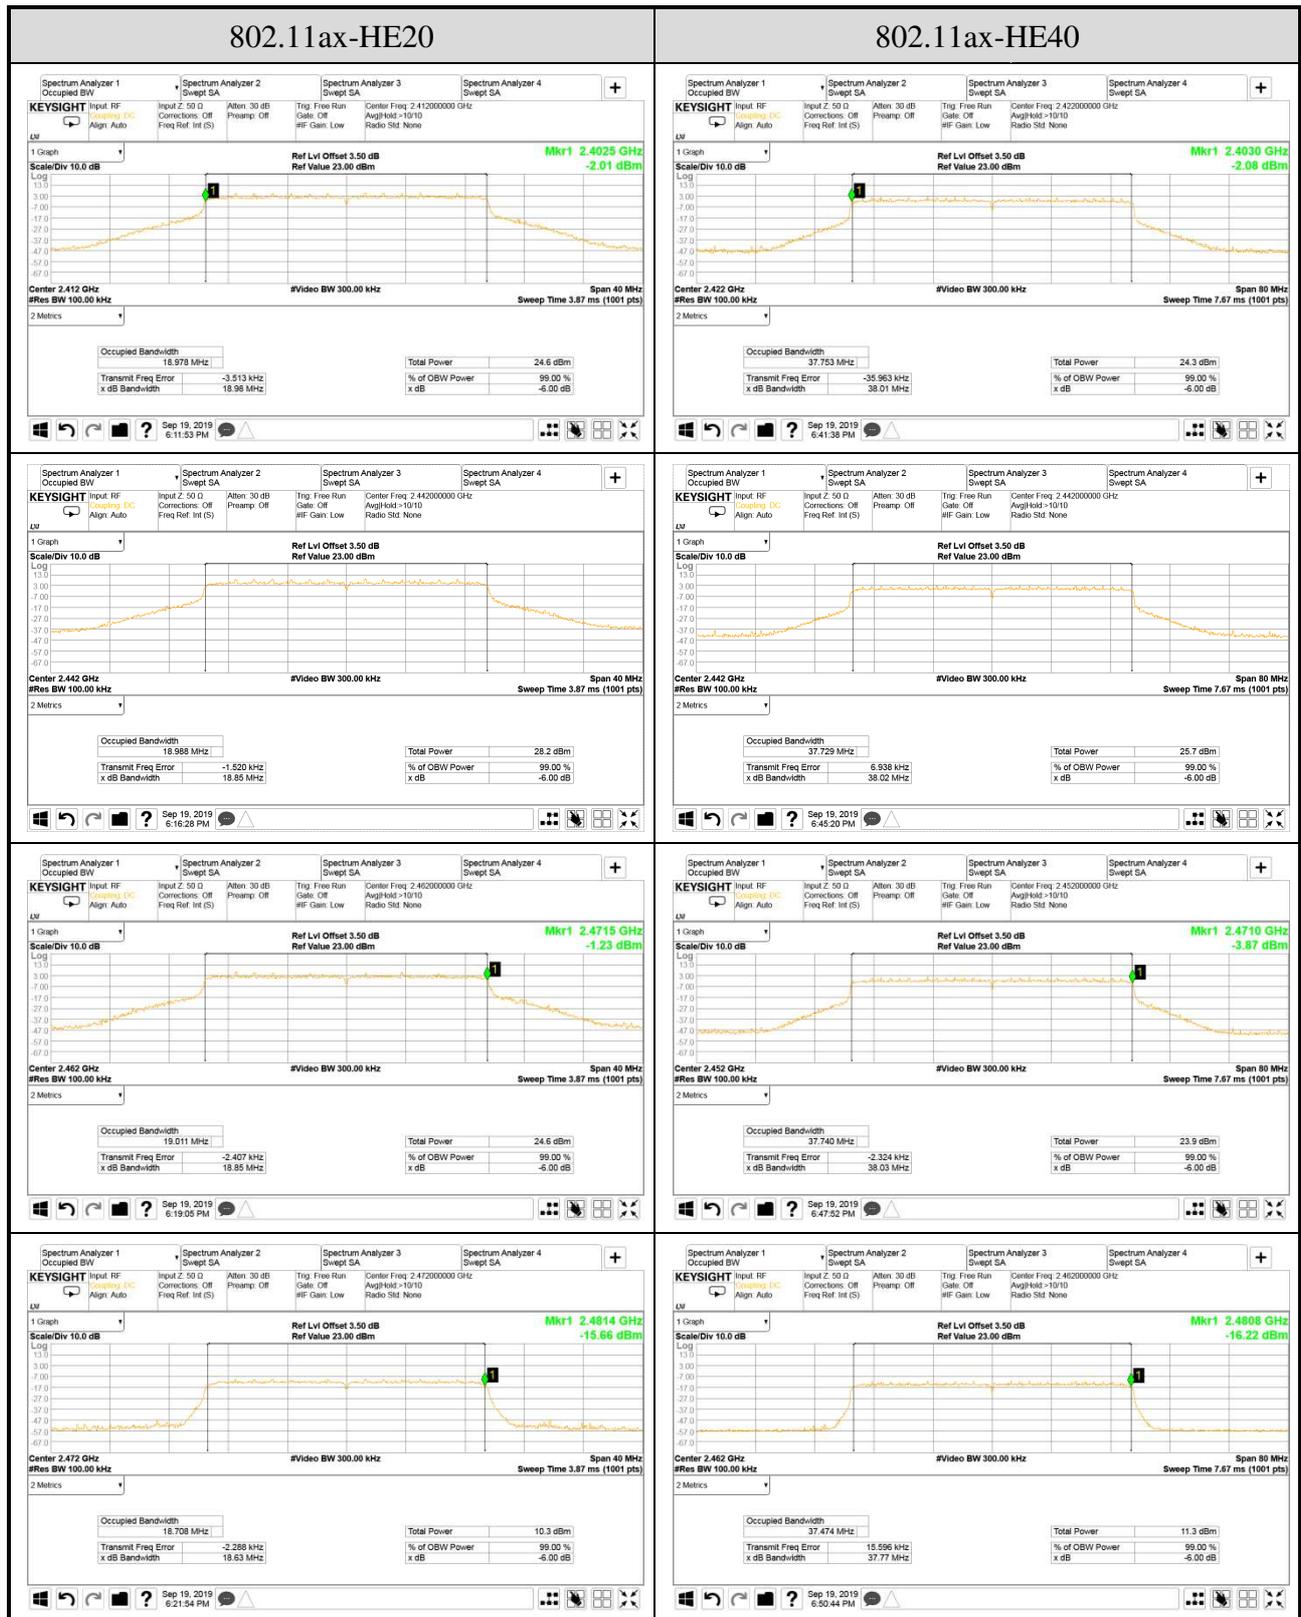



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX B

TEST PHOTOGRAPHS

(Model: 15Z995)