

FCC 15.407 NII 5GHz Test Report

for

LG Electronics Inc.

**222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do,
451-713, Korea**

Product Name : Notebook Computer
Model Name : 15Z995
Brand : LG
FCC ID : BEJNT-15Z995

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION.....	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Antenna Information	9
3.4. EUT Specifications Assessed in Current Report	9
3.5. Description of Key Components	12
3.6. Test Configuration.....	14
3.7. Tested Supporting System List.....	22
3.8. Setup Configuration.....	22
3.9. Operating Condition of EUT	22
3.10. Description of Test Facility	23
3.11. Measurement Uncertainty	24
4. MEASUREMENT EQUIPMENTLIST.....	25
4.1. Conducted Emission Measurement	25
4.2. Radiated Emission Measurement	26
4.3. RF Conducted Measurement	26
5. CONDUCTED EMISSION.....	27
5.1. Block Diagram of Test Setup	27
5.2. Conducted Emission Limit	27
5.3. Test Procedure	27
5.4. Test Results	28
6. RADIATED EMISSION	29
6.1. Block Diagram of Test Setup	29
6.2. Radiated Emission Limits.....	30
6.3. Test Procedure	32
6.4. Measurement Result Explanation.....	33
6.5. Test Results	33
7. 26dB/6dB BANDWIDTH	34
7.1. Block Diagram of Test Setup	34
7.2. Specification Limits.....	34
7.3. Test Procedure	34
7.4. Test Results	34
8. MAXIMUM OUTPUT POWER	35
8.1. Block Diagram of Test Setup	35
8.2. Specification Limits.....	35
8.3. Test Procedure	36
8.4. Test Results	36
9. EMISSION LIMITATIONS MEASUREMENT	37
9.1. Block Diagram of Test Setup	37
9.2. Specification Limits.....	37
9.3. Test Procedure	39



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

9.4. Test Results	39
10. POWER SPECTRAL DENSITY	40
10.1. Block Diagram of Test Setup	40
10.2. Specification Limits.....	40
10.3. Test Procedure	40
10.4. Test Results	40
11. FREQUENCY STABILITY	41
11.1. Block Diagram of Test Setup	41
11.2. Specification Limits.....	41
11.3. Test Procedure	41
11.4. Test Results	41
12. DEVIATION TO TEST SPECIFICATIONS	42

APPENDIX A TEST DATA AND PLOTS
APPENDIX B TESTPHOTOGRAPHS

TEST REPORT


Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory #1 : LG Electronics Nanjing New Technology Co., Ltd.
Factory #2 : SEO HEUNG ELECTRONICS CO LTD
EUT Description
(1) Product : Notebook Computer
(2) Model : 15Z995
(3) Brand : LG
(4) Power Supply: DC 19V, 2.53A

Applicable Standards:

47 CFR FCC Part 15 Subpart E
ANSI C 63.10:2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **Audix Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2020. 01. 07

Reviewed by: 
(Annie Yu/Administrator)

Approved by: 
(Johnny Hsueh/Section Manager)

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Data	Revision Summary	Report Number
0	2020. 01. 07	Original Report	EM-F190534

2. SUMMARY OF TEST RESULTS

Rule	Description	Data Reused	Results
15.207	Conducted Emission	No	PASS
15.205/15.209	Radiated Band Edge and Radiated Spurious Emission	No	PASS
15.407(a)(5)/15.407(e)	26dB/6dB Bandwidth	Yes	PASS
15.407(a)	Maximum Output Power	SPOT CHECK Note 2	PASS
15.407(b)	Conducted Band Edges	No	PASS
15.407(a)	Power Spectral Density	Yes	PASS
15.203	Antenna Requirement	Yes	Compliance
15.407	Frequency Stability	---	PASS

Note: 1. The uncertainties value is not used in determining the result.
2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N grant on 11/29 2019. According to KDB 484596 D01, we did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do, 451-713, Korea
Manufacturer	LG Electronics Inc. 222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do, 451-713, Korea
Factory #1	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Factory #2	SEO HEUNG ELECTRONICS CO LTD 55 Asan valley Seo-ro, Dunpo-myeon, Asan-si, Chungcheongnam-do, 31409 Korea
Product	Notebook Computer The product has two colors (Dark Silver and White).
Model	15Z995
Brand	LG

3.2. Description of EUT

Test Model	15Z995																												
Serial Number	N/A																												
Power Rating	DC 19V, 2.53A																												
RF Features	WLAN: 802.11 a/b/g/n/ac/ax Bluetooth: BT and BLE (BT 5.0)																												
Transmit Type	<table border="1"> <thead> <tr> <th colspan="2">2.4 GHz</th> </tr> </thead> <tbody> <tr> <td>802.11b</td> <td>1T1R</td> </tr> <tr> <td>802.11g</td> <td>1T1R</td> </tr> <tr> <td>802.11n-HT20</td> <td>2T2R</td> </tr> <tr> <td>802.11n-HT40</td> <td>2T2R</td> </tr> <tr> <td>802.11ax-HE20</td> <td>2T2R</td> </tr> <tr> <td>802.11ax-HE40</td> <td>2T2R</td> </tr> <tr> <td>BT/BLE</td> <td>1T1R</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">UNII Bands</th> </tr> </thead> <tbody> <tr> <td>802.11a</td> <td>1T1R</td> </tr> <tr> <td>802.11n-HT20/802.11ac-VHT20/802.11ax-HE20</td> <td>2T2R</td> </tr> <tr> <td>802.11n-HT40/802.11ac-VHT40/802.11ax-HE40</td> <td>2T2R</td> </tr> <tr> <td>802.11ac-VHT80/802.11ax-HE80</td> <td>2T2R</td> </tr> <tr> <td>802.11ac-VHT160/802.11ax-HE160</td> <td>2T2R</td> </tr> </tbody> </table>	2.4 GHz		802.11b	1T1R	802.11g	1T1R	802.11n-HT20	2T2R	802.11n-HT40	2T2R	802.11ax-HE20	2T2R	802.11ax-HE40	2T2R	BT/BLE	1T1R	UNII Bands		802.11a	1T1R	802.11n-HT20/802.11ac-VHT20/802.11ax-HE20	2T2R	802.11n-HT40/802.11ac-VHT40/802.11ax-HE40	2T2R	802.11ac-VHT80/802.11ax-HE80	2T2R	802.11ac-VHT160/802.11ax-HE160	2T2R
2.4 GHz																													
802.11b	1T1R																												
802.11g	1T1R																												
802.11n-HT20	2T2R																												
802.11n-HT40	2T2R																												
802.11ax-HE20	2T2R																												
802.11ax-HE40	2T2R																												
BT/BLE	1T1R																												
UNII Bands																													
802.11a	1T1R																												
802.11n-HT20/802.11ac-VHT20/802.11ax-HE20	2T2R																												
802.11n-HT40/802.11ac-VHT40/802.11ax-HE40	2T2R																												
802.11ac-VHT80/802.11ax-HE80	2T2R																												
802.11ac-VHT160/802.11ax-HE160	2T2R																												
Device Category	<input type="checkbox"/> Outdoor Access Point <input type="checkbox"/> Fixed point-to-point Access Point <input type="checkbox"/> Indoor Access Point <input checked="" type="checkbox"/> Mobile and Portable client device																												
Software Version	N/A																												
Sample Status	Mass production																												
Date of Receipt	2019. 12. 16																												
Date of Test	2019. 12. 25 ~ 2020. 01. 07																												
Interface Ports of EUT	<ul style="list-style-type: none"> • One Micro SD Card Slot • One Earphone Port • Three USB 3.0 Ports • One USB Type C Port • One HDMI Port • One DC Input Port 																												
Accessories Supplied	<ul style="list-style-type: none"> • AC Adapter • LAN Gender 																												

3.3. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	15Z980 ANTENNA ASM (Main)	LUXSHARE-ICT	PIFA	2400-2500	-1.21
				5150-5350	-2.1
				5470-5725	-1.3
				5725-5850	-1.1
2	15Z980 ANTENNA ASM (AUX)	LUXSHARE-ICT	PIFA	2400-2500	-0.8
				5150-5350	-2.8
				5470-5725	-2.0
				5725-5850	-3.5

3.4. EUT Specifications Assessed in Current Report

Mode	UNII Band	Fundamental Range (MHz)	Channel Number
802.11a	NII-I	5180-5240	4
	NII-2A	5260-5320	4
	NII-2C	5500-5720	12
	NII-III	5745-5825	5
802.11n-HT20/ 802.11ac-VHT20 802.11ax-HE20	NII-I	5180-5240	4
	NII-2A	5260-5320	4
	NII-2C	5500-5720	12
	NII-III	5745-5825	5
802.11n-HT40/ 802.11ac-VHT40 802.11ax-HE40	NII-I	5190-5230	2
	NII-2A	5270-5310	2
	NII-2C	5510-5710	6
	NII-III	5755-5795	2
802.11ac-VHT80 802.11ax-HE80	NII-I	5210	1
	NII-2A	5290	1
	NII-2C	5530-5690	3
	NII-III	5775	1
802.11ac-VHT160 /802.11ax-HE160	NII-I	5250	1
	NII-2A		
	NII-2C	5570	1
Remark: 1. NII-2A and NII-2C (DFS Function, Slave/no In service monitor, no Ad-Hoc mode) 2. 802.11ax channel puncturing is not implemented.			

Mode	Modulation	Data Rate (Mbps)
802.11a	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 144.4
802.11n-HT40		Up to 300
802.11ac-VHT20	OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)	Up to 173.3
802.11ac-VHT40		Up to 400
802.11ac-VHT80		Up to 866.7
802.11ac-VHT160		Up to 1733.3
802.11ax-HE20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM)	Up to 287
802.11ax-HE40		Up to 574
802.11ax-HE80		Up to 1201
802.11ax-HE160		Up to 2402

Channel List					
802.11a/802.11n-HT20/802.11ac-VHT20/802.11ax-HE20					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
NII-I	36	5180	NII-2C	120	5600
	40	5200		124	5620
	44	5220		128	5640
	48	5240		132	5660
NII-2A	52	5260		136	5680
	56	5280		140	5700
	60	5300		144	5720
	64	5320		149	5745
NII-2C	100	5500	NII-III	153	5765
	104	5520		157	5785
	108	5540		161	5805
	112	5560		165	5825
	116	5580			

Channel List					
802.11n-HT40/802.11ac-VHT40/802.11ax-HE40					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
NII-I	38	5190	NII-2C	118	5590
	46	5230		126	5630
NII-2A	54	5270		134	5670
	62	5310		142	5710
NII-2C	102	5510	NII-III	151	5755
	110	5550		159	5795

Channel List					
802.11ac-VHT80/802.11ax-HE80					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
NII-I	42	5210	NII-2C	138	5690
NII-2A	58	5290	NII-III	155	5775
NII-2C	106	5530			
	122	5610			

Channel List					
802.11ac-VHT160/802.11ax-HE160					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
NII-I	50	5250	NII-2C	114	5570
NII-2A					

Note: Test modes are presented at section 3.6.

3.5. Description of Key Components

3.5.1. For the All Component Lists

Item	Supplier	Model / Type	Character	
System	Microsoft	Win10 Home	---	
	Microsoft	Win10 Pro	---	
Main Board	LG	14_15Z990/995 Main B/D	Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited	
SUB Board	LG	15Z990 WLAN SUB B/D	Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited	
CPU (Socket:FCBGA1528)	Intel	i5-10210U	1.6GHz, up to 4.2GHz	
		i7-10510U	1.8GHz, up to 4.9GHz	
15.6" LCD Panel	LG Display	LP156WFA(SP)(G1)	Resolution: 1920 x 1080, 60Hz FHD IPS (Touch)	
	LG Display	LP156WFC(SP)(Y1)	Resolution: 1920 x 1080, 60Hz FHD IPS (Normal Non touch)	
Storage (SSD)	Samsung	MZ-VLB2560	256GB	
	Samsung	MZ-VLB512B	512GB	
Memory (RAM)	Samsung	-	8GB DDR4	
	SK hynix	-	8GB DDR4	
	Samsung	-	8GB DDR4 SODIMM (On Card)	
Battery Pack	LG	LBS1224E	72Wh, DC7.7V, 9450mAh	
WLAN Combo Card	Intel	AX201D2W	WLAN and BT, 2x2 CNVi 1216 FCC ID: PD9AX201NG IC: 1000M-AX201NG	
WLAN Combo Antenna	LG (LUXSHARE-ICT)	15Z980 ANTENNA ASM	PIFA Type Main: Black, Aux: Gray	
Keyboard	LG	SN3870BL	15Z980 Black KBD	
		SN3870BL1	15Z980 White KBD	
Web Camera	Chicony	CKFIH2821005290LH	With two microphones	
		CKFIH28-121005290LH	With One microphone	
	Luxvisions	7BF109N2DC	With two microphones	
		7BF109N2DD	With One microphone	
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100 Megabit Ethernet	
		80-5946-101	(Black) 10/100 Megabit Ethernet	
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100Megabit Ethernet	
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet	
	Type C to LAN: Shielded, Undetached, 0.12m			
	SUZHOU MEC ELECTRONICS	80-5946-200	(White) 10/100/1000 Megabit Ethernet	
		80-5946-210	(Black) 10/100/1000 Megabit Ethernet	
Type C to LAN: Shielded, Undetached, 0.13m.				
AC Adapter (48W)	LG (HONOR)	ADS-48MS-19-2 19048E	I/P: AC 100-240V, 50-60Hz, 1.5A, O/P: DC 19V, 2.53A	
	DC Power Cord: Non-Shielded, Undetached, 1.5m AC Power Cord: Non-Shielded, Detached, 1.55m (2C)			

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

- 3.5.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:


SKU	
Main Board	LG, 14_15Z990/995 Main B/D
SUB Board	LG, 15Z990 WLAN SUB B/D
CPU	Intel, i7-10510U
15.6" LCD Panel	LG Display, LP156WFA(SP)(G1) (Touch)
Storage (SSD)	Samsung, 256GB
Memory (RAM)	SK hynix, 8GB
	Samsung, 8GB (On Card)
Battery Pack	LG, LBS1224E
WLAN Combo Card	Intel, AX201D2W
WLAN Combo Antenna	LG (LUXSHARE-ICT), 15Z980 ANTENNA ASM
Keyboard	LG, SN3870BL1 (White KBD)
Web Camera	Chicony, CKFIH2821005290LH
Type C	Link to LAN Gender
AC Adapter	SUZHOU MEC ELECTRONICS, 80-5946-200 (White)
	LG (HONOR), ADS-48MS-19-2 19048E


3.6. Test Configuration

Mode	TX _{on} (ms)	1/ TX _{on} (kHz)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
802.11a	2.080	0.481	0.986	N/A
802.11n-HT20	3.970	0.252	0.988	N/A
802.11n-HT40	3.960	0.253	0.990	N/A
802.11ac-VHT80	3.960	0.253	0.990	N/A
802.11ac-VHT160	2.780	0.360	0.986	N/A
802.11ax-HE20	3.960	0.253	0.990	N/A
802.11ax-HE40	3.940	0.254	0.985	N/A
802.11ax-HE80	3.950	0.253	0.985	N/A
802.11ax-HE160	2.280	0.439	0.982	N/A

Note: When duty cycle is less than 98% (0.98) that duty cycle factor 10log(1/x) is needed to add in conducted test items measured in average detector.



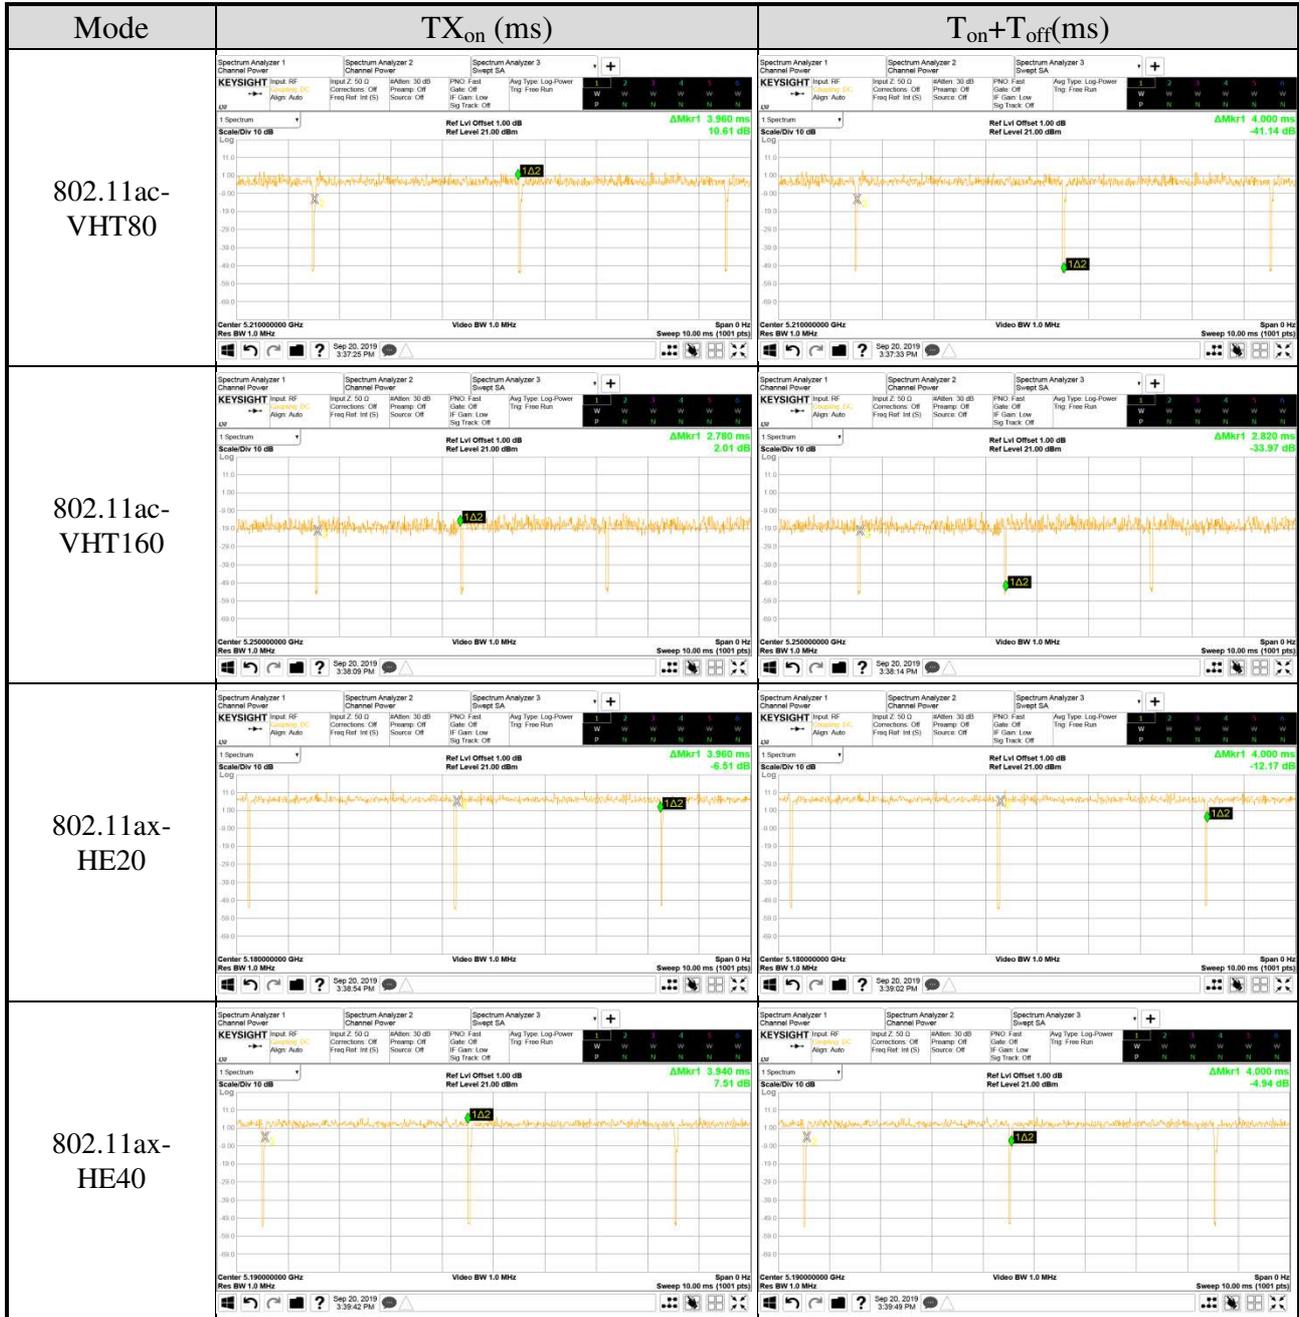

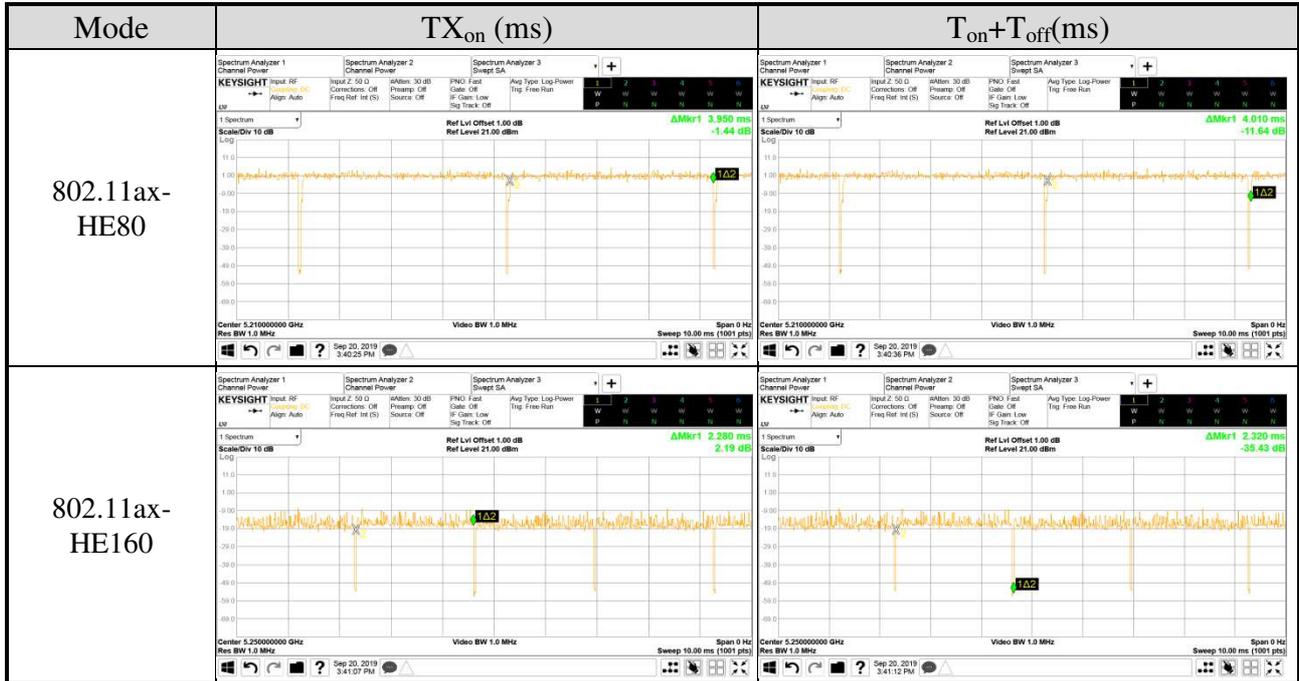

AC Conduction
Normal operation

Item	Mode	Data Rate ^{Note3}	Test Channel
Radiated Test Case	Radiated Band Edge ^{Note1}	802.11a	6 Mbps 36/64/100/140/144
		802.11n-HT20	MCS8 36/64/100/140/144
		802.11n-HT40	MCS8 38/62/102/134/142
		802.11ac-VHT80	MCS0 42/58/106/122/138
		802.11ac-VHT160	MCS0 50/114
		802.11ax-HE20	MCS0 36/64/100/140/144
		802.11ax-HE40	MCS0 38/62/102/134/142
		802.11ax-HE80	MCS0 42/58/106/122/138
	802.11ax-HE160	MCS0 50/114	
	Radiated Spurious Emission ^{Note1 & 2}	802.11a	6 Mbps 48/52/116/144/149
		802.11n-HT20	MCS8 48/52/116/144/157
		802.11n-HT40	MCS8 46/54/134/142/159
		802.11ac-VHT80	MCS0 42/58/122/138/155
		802.11ac-VHT160	MCS0 50/114
		802.11ax-HE20	MCS0 48/52/116/144/165
		802.11ax-HE40	MCS0 46/54/134/142/159
802.11ax-HE80		MCS0 42/58/122/138/155	
802.11ax-HE160	MCS0 50/114		

Item	Mode	Data Rate ^{Note 3}	RU Configuration	Test Channel
Radiated Test Case	802.11ax-HE20	MCS0	26/0	36/100
			52/37	
			106/53	
		MCS0	26/8	64/140
			52/40	
			106/54	
	802.11ax-HE40	MCS0	242/61	38/102
		MCS0	242/62	62/134
	802.11ax-HE80	MCS0	484/65	42/106
		MCS0	484/66	58/122
	802.11ax-HE160	MCS0	996/67	50/114
		MCS0	996/S67	50/114

Item		Mode	Data Rate ^{Note3}	Test Channel
Conducted Test Case	26dB/6 dB Bandwidth	802.11a	6 Mbps	36/40/48/52/60/64/100/ 116/140/144/149/ 157/165
		802.11n-HT20	MCS8	36/40/48/52/60/64/100/ 116/140/144/149/ 157/165
		802.11n-HT40	MCS8	38/46/54/62/102/110/ 134/142/151/159
		802.11ac-VHT80	MCS0	42/58/106/122/138/155
		802.11ac-VHT160	MCS0	50/114
		802.11ax-HE20	MCS0	36/40/48/52/60/64/100/ 116/140/144/149/157/1 65
		802.11ax-HE40	MCS0	38/46/54/62/102/110/ 134/142/151/159
		802.11ax-HE80	MCS0	42/58/106/122/138/155
	802.11ax-HE160	MCS0	50/114	
	Maximum output power	802.11a	6 Mbps	36/40/48/52/60/64/100/ 116/140/144/149/ 157/165
		802.11n-HT20	MCS8	36/40/48/52/60/64/100/ 116/140/144/149/ 157/165
		802.11n-HT40	MCS8	38/46/54/62/102/110/ 134/142/151/159
		802.11ac-VHT80	MCS0	42/58/106/122/138/155
		802.11ac-VHT160	MCS0	50/114
		802.11ax-HE20	MCS0	36/40/48/52/60/64/100/ 116/140/144/149/ 157/165
		802.11ax-HE40	MCS0	38/46/54/62/102/110/ 134/142/151/159
802.11ax-HE80		MCS0	42/58/106/122/138/155	
802.11ax-HE160	MCS0	50/114		

Item		Mode	Data Rate <small>Note3</small>	Test Channel
Conducted Test Case	Conducted Band Edges	802.11a	6 Mbps	149/165
		802.11n-HT20	MCS8	149/165
		802.11n-HT40	MCS8	151/159
		802.11ac-VHT80	MCS0	155
		802.11ax-HE20	MCS0	149/165
		802.11ax-HE40	MCS0	151/159
		802.11ax-HE80	MCS0	155
	Power spectral density	802.11a	6 Mbps	36/40/48/52/60/64/100/ 116/140/144/149/ 157/165
		802.11n-HT20	MCS8	36/40/48/52/60/64/100/ 116/140/144/149/ 157/165
		802.11n-HT40	MCS8	38/46/54/62/102/110/ 134/142/151/159
		802.11ac-VHT80	MCS0	42/58/106/122/138/155
		802.11ac-VHT160	MCS0	50/114
		802.11ax-HE20	MCS0	36/40/48/52/60/64/100/ 116/140/144/149/ 157/165
		802.11ax-HE40	MCS0	38/46/54/62/102/110/ 134/142/151/159
		802.11ax-HE80	MCS0	42/58/106/122/138/155
802.11ax-HE160	MCS0	50/114		

Item		Mode	Data Rate ^{Note3}	RU Configuration	Test Channel
Conducted Test Case	26dB/6dB Bandwidth	802.11ax-HE20	MCS0	26/0	36/100/149
				52/37	
				106/53	
			MCS0	26/8	64/140/165
				52/40	
				106/54	
		802.11ax-HE40	MCS0	242/61	38/102/151
			MCS0	242/62	62/134/159
		802.11ax-HE80	MCS0	484/65	42/106/155
			MCS0	484/66	58/122/155
		802.11ax-HE160	MCS0	996/67	50/114
			MCS0	996/S67	50/114
	Maximum output power	802.11ax-HE20	MCS0	26/0	36/100/149
				52/37	
				106/53	
			MCS0	26/8	64/140/165
				52/40	
				106/5	
		802.11ax-HE40	MCS0	242/61	38/102/151
			MCS0	242/62	62/134/159
		802.11ax-HE80	MCS0	484/65	42/106/155
			MCS0	484/66	58/122/155
		802.11ax-HE160	MCS0	996/67	50/114
			MCS0	996/S67	50/114
Conducted Band Edges	802.11ax-HE20	MCS0	26/0	149	
			52/37		
			106/53		
		MCS0	26/8	165	
			52/40		
			106/54		
	802.11ax-HE40	MCS0	242/61	151	
		MCS0	242/62	159	
	802.11ax-HE80	MCS0	484/65	155	
			484/66		

Item		Mode	Data Rate ^{Note3}	RU Configuration	Test Channel
Conducted Test Case	Power spectral density	802.11ax-HE20	MCS0	26/0	36/100/149
				52/37	
				106/53	
		802.11ax-HE40	MCS0	26/8	64/140/165
				52/40	
				106/54	
		802.11ax-HE40	MCS0	242/61	38/102/151
				242/62	62/134/159
		802.11ax-HE80	MCS0	484/65	42/106/155
				484/66	58/122/155
		802.11ax-HE160	MCS0	996/67	50/114
				996/S67	50/114

Note 1: Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: Lie Side Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

Note 3: The data rates were selected based on preliminary testing that identified those rate as the worst case for output power.

3.7. Tested Supporting System List

3.7.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD Monitor	LG	22LK330-DB	N/A	N/A
2.	USB Mouse	ASUS	MOBTUO	N/A	FCC By DoC
3.	Earphone	APPLE	N/A	N/A	N/A

3.7.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8m
3.	Earphone Cable: Unshielded, Undetachable, 0.9m

3.8. Setup Configuration

3.8.1. EUT Configuration for Power Line & Radiated Emission

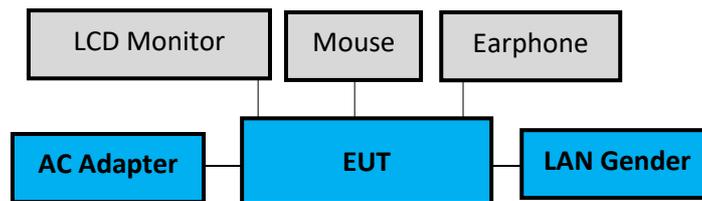

3.8.2. EUT Configuration for RF Conducted Test Items

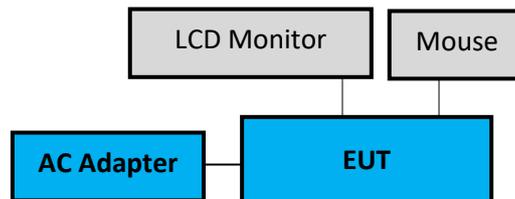

3.9. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT WLAN function under continues transmitting and choosing data rate/ channel.

[Chain 0 is aux port (A Button in DRTU) Chain 1 is main port (B Button in DRTU)].

3.10. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber

3.11.Measurement Uncertainty

Test Items/Facilities		Frequency Range	Uncertainty
Conduction Test		9kHz-150kHz	±3.7dB
		150kHz-30MHz	±3.5dB
Radiation Test	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.1dB
		200MHz-1000MHz, 3m, Horizontal	±3.9dB
		30MHz-200MHz, 3m, Vertical	±4.2dB
		200MHz-1000MHz, 3m, Vertical	±4.1dB
		1GHz-6GHz, 3m	±4.2dB
		6GHz-18GHz, 3m	±4.6dB
	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
		200MHz-1000MHz, 3m, Horizontal	±3.9dB
		30MHz-200MHz, 3m, Vertical	±4.4dB
		200MHz-1000MHz, 3m, Vertical	±4.1dB
	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.3dB
		200MHz-1000MHz, 3m, Horizontal	±4.0dB
		30MHz-200MHz, 3m, Vertical	±4.3dB
		200MHz-1000MHz, 3m, Vertical	±4.4dB
		1GHz-6GHz, 3m	±4.5dB
		6GHz-18GHz, 3m	±4.6dB
	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.0dB
		200MHz-1000MHz, 3m, Horizontal	±3.9dB
		30MHz-200MHz, 3m, Vertical	±4.2dB
		200MHz-1000MHz, 3m, Vertical	±4.3dB
		1GHz-6GHz, 3m	±4.3dB
		6GHz-18GHz, 3m	±4.7dB
	Fully Anechoic Chamber	30MHz~1000MHz	±4.7dB
		1GHz~18GHz	±5.3dB

Remark : Uncertainty = $ku_c(y)$

Test Items	Uncertainty
Emission Bandwidth	± 0.2kHz
Maximum output power	± 0.33dB
Power spectral density	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2019. 01. 23	1 Year
2.	A.M.N.	R&S	ENV4200	100169	2019. 11. 13	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2019. 12. 10	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2019. 01. 12	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2019. 04. 20	1 Year
6.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2019. 09. 11	1 Year
2.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2019. 01. 17	1 Year
3.	Test Receiver	R & S	ESCS30	100338	2019. 06. 12	1 Year
4.	Amplifier	HP	8447D	2944A06305	2019. 01. 30	1 Year
5.	Amplifier	HP	8449B	3008A02678	2019. 03. 07	1 Year
6.	Amplifier	Keysight	83051A	MY53010042	2019. 08. 08	1 Year
7.	Bilog Antenna	TESEQ	CBL6112D	33821	2019. 01. 19	1 Year
8.	Loop Antenna	R&S	HFH2-Z2	891847/27	2019.12. 16	2 Years
9	Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00135902	2019. 03. 13	1 Year
10.	Horn Antenna	COM-POWER	AH-840	101092	2019 .05. 14	1 Year
11.	5G Notch Filter	Microwave Circuits	N0452502	459775	2019. 05. 07	1 Year
12.	5G Notch Filter	Microwave Circuits	N0555983	459481	2019. 05. 07	1 Year
13.	5G Notch Filter	Microwave Circuits	N0257881	459776	2019. 08. 21	1 Year
14.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2019. 02. 01	1 Year
15.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	54602/6	2019. 02. 01	1 Year
16.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	MY1493/2	2019. 02. 01	1 Year
17.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	MY1495/2	2019. 02. 01	1 Year
18.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2019. 04. 20	1 Year
19.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2019. 01. 17	1 Year
2.	Power Meter	Anritsu	ML2495A	1145008	2019. 11. 06	1 Year
3.	Power Sensor	Anritsu	MA2411B	1126096	2019. 11. 06	1 Year
4.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2019. 04. 20	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.8

5.1.2. Shielded Room Setup Diagram

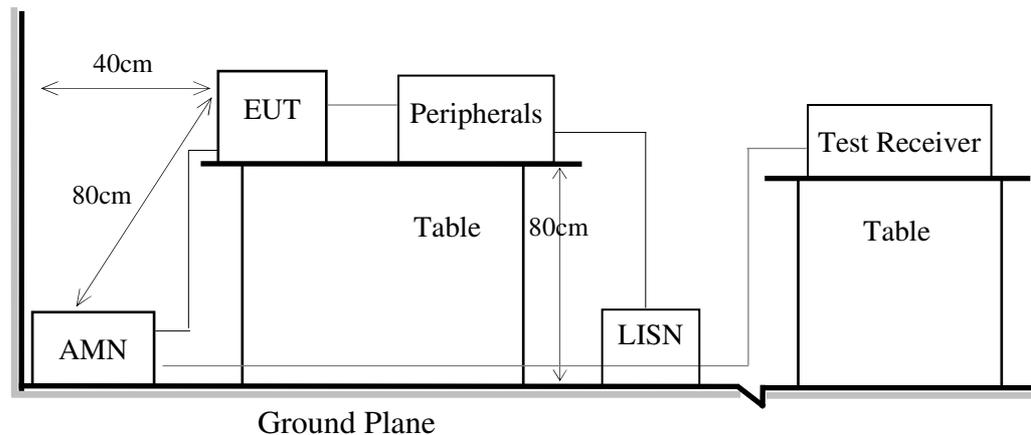

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.).
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.



5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.8


6.1.2. Setup Diagram for 9kHz-30MHz

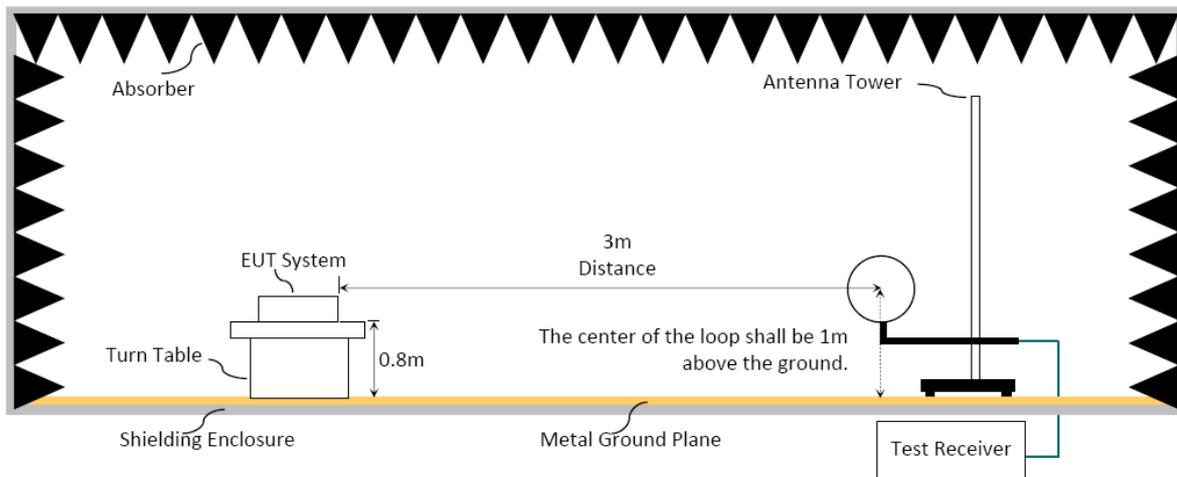

6.1.3. Setup Diagram for 30-1000MHz

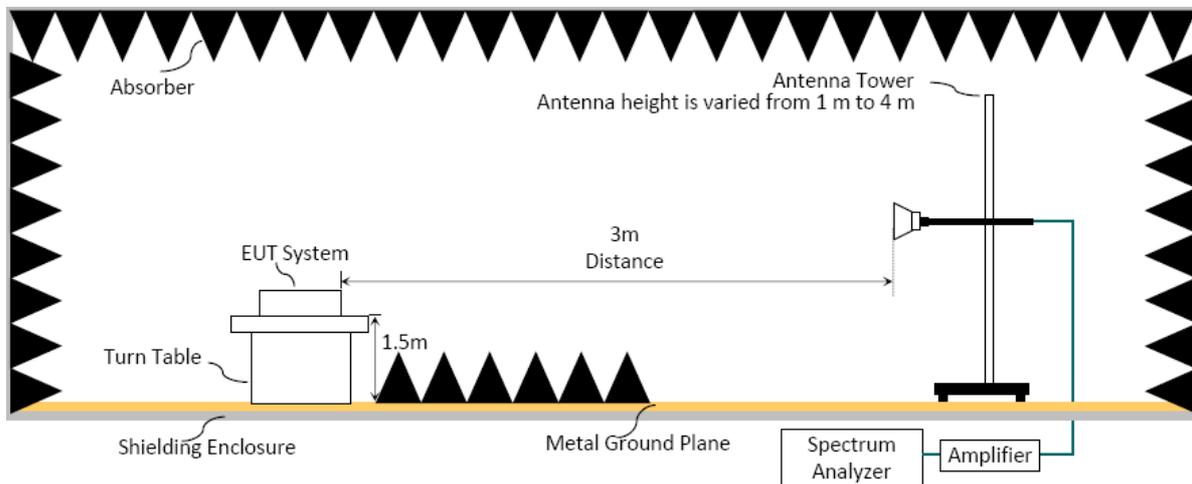

6.1.4. Setup Diagram for above 1GHz

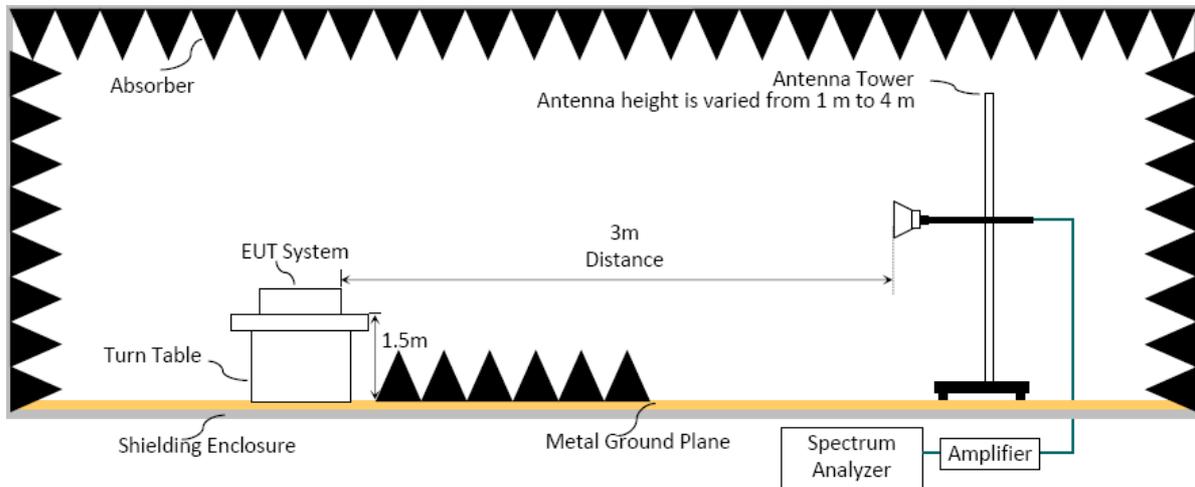

6.2. Radiated Emission Limits

Radiated emissions fall in restricted bands, as defined in Section 15.205 must be in compliance with the radiated emission limits specified in 15.209 as below.

6.2.1. General Limit

Frequency (MHz)	Distance(m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)


- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.2.2. Limit for non-restricted frequency above 1 GHz

Frequency Band (MHz)	E.I.R.P. Limit	Field Strength Limit at 3 m
5150 to 5250	-27 dBm	68.2
5250 to 5350		68.2
5470 to 5725		68.2

Note: Field Strength at 3 m= E.I.R.P. + 95.2 dB

Frequency Band (MHz)	Field Strength Limit at 3 m	
5725 to 5850	<input checked="" type="checkbox"/>	15.407(b)(4)(i) All emissions shall be limited to a level of 68.2 dB μ V/mat 75 MHz or more above or below the band edge increasing linearly to 105.2dB μ V/m at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 110.8 dB μ V/m at 5 MHz above or below the band edge increasing linearly to a level of 68.2 dB μ V/m at the band edge.
	<input type="checkbox"/>	15.407(b)(4)(ii) ,compliance with the emission limits in § 15.247(d) Shall be at least 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power,. Attenuation below the general limits specified in §15.209(a) is not required. In addition,radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

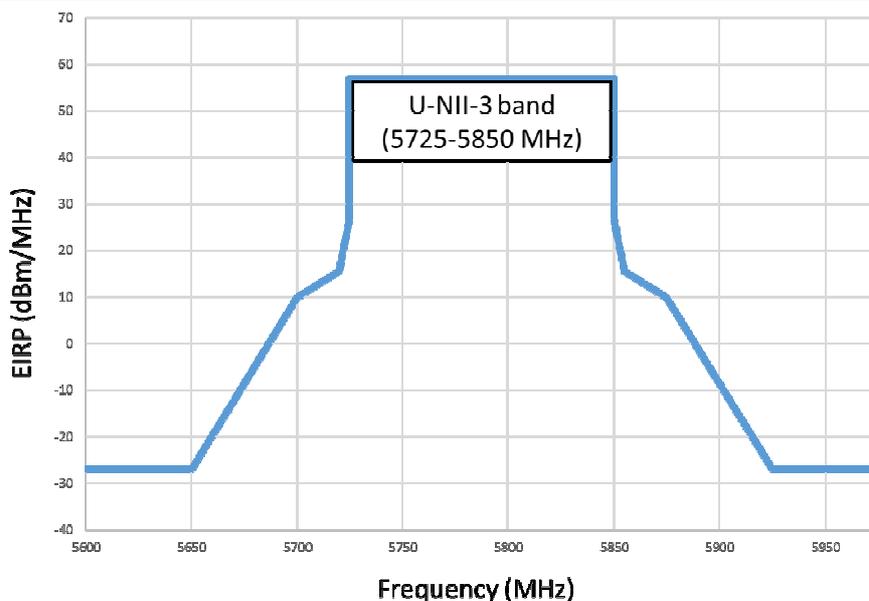

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 40GHz:

The EUT setup on the turn table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic(up to 40 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:**■ Option 1:**

(1) RBW = 1MHz

(2) VBW \geq 1/ T.

Modulation Type	T (ms)	1/ T (kHz)	VBW Setting(Hz)
802.11a	2.080	0.481	10Hz
802.11n-HT20	3.970	0.252	10Hz
802.11n-HT40	3.960	0.253	10Hz
802.11ac-VHT80	3.960	0.253	10Hz
802.11ac-VHT160	2.780	0.360	10Hz
802.11ax-HE20	3.960	0.253	10Hz
802.11ax-HE40	3.940	0.254	10Hz
802.11ax-HE80	3.950	0.253	10Hz
802.11ax-HE160	2.280	0.439	10Hz

N/A: 1/ T is not implemented when duty cycle presented in section 3.6 is \geq 98%.

(1) Detector = Peak.

(2) Sweep time = auto.

(3) Trace mode = max hold.

(4) Allow sweeps to continue until the trace stabilizes.

□ Option 2:


Average Emission Level= Peak Emission Level+ D.C.C.F.

6.4. Measurement Result Explanation**■** Peak Emission Level=Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)**■** Average Emission Level l=Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used) Average Emission Level= Peak Emission Level+ DCCFDuty Cycle Correction Factor (DCCF)= $20\log(TX_{on}/TX_{on+off})$ presented in section 3.7 ERP= Peak Emission Level-95.2dB-2.14dB**6.5. Test Results**

Please refer to Appendix A.

7. 26dB/6dB BANDWIDTH

7.1. Block Diagram of Test Setup

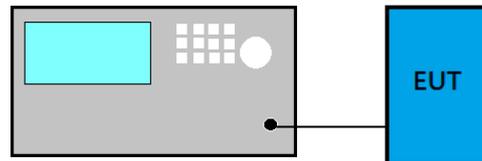

7.2. Specification Limits

Frequency Band (MHz)	Limit
5150 to 5250	Reference only
5250 to 5350	
5470 to 5725	
5725 to 5850	$\geq 500\text{kHz}$

7.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ Applicable to all bands except to 5725 MHz- 5850 MHz

- (1) Set RBW= 1% of the emission bandwidth
- (2) Set VBW > RBW
- (3) Detector = Peak
- (4) Trace mode = max hold
- (5) Setting channel bandwidth function x dB to -26 dB to record the final bandwidth.

■ 5725 MHz- 5850 MHz


- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.

7.4. Test Results


Please refer to Appendix A

8. MAXIMUM OUTPUT POWER

8.1. Block Diagram of Test Setup

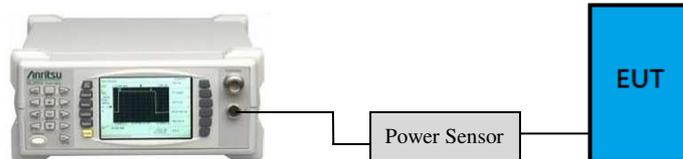

- For 802.11ac-VHT80/160, 802.11ax-HE80/160 modes only

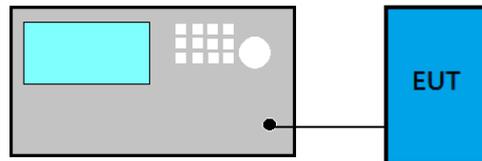

8.2. Specification Limits

Frequency Band (MHz)	Category	Limit
5150 to 5250	Outdoor Access Point	1 W(30 dBm)/ Max e.i.r.p. ≤125 mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon
	Fixed point-to-point Access Point	1 W(30 dBm)
	Indoor Access Point	1 W(30 dBm)
	Mobile and Portable client device	250 mW(24 dBm)
5250 to 5350	N/A	250 mW or 11 dBm + 10 log B ^{Note1}
5470 to 5725		250 mW or 11 dBm + 10 log B ^{Note1}
5725 to 5850		1 W(30 dBm)

Note 1: B is the 26 dB emission bandwidth, which presented in section 7 and appendix A.1.

8.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

■ **Method AVGSA-2 (Spectrum channel power) for 802.11ac-VHT80/160, 802.11ax-HE80/160 modes only**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW) \geq 3 MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is < 98%.

8.4. Test Results

Please refer to Appendix A

9. EMISSION LIMITATIONS MEASUREMENT


9.1. Block Diagram of Test Setup

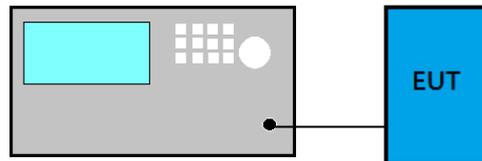

9.2. Specification Limits

Frequency Band (MHz)	E.I.R.P. Limit
5150 to 5250	-27 dBm
5250 to 5350	
5470 to 5725	

Frequency Band (MHz)	E.I.R.P. Limit	
5725 to 5850	<input checked="" type="checkbox"/>	15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
	<input type="checkbox"/>	15.407(b)(4)(ii) ,compliance with the emission limits in § 15.247(d) Shall be at least 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power,. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

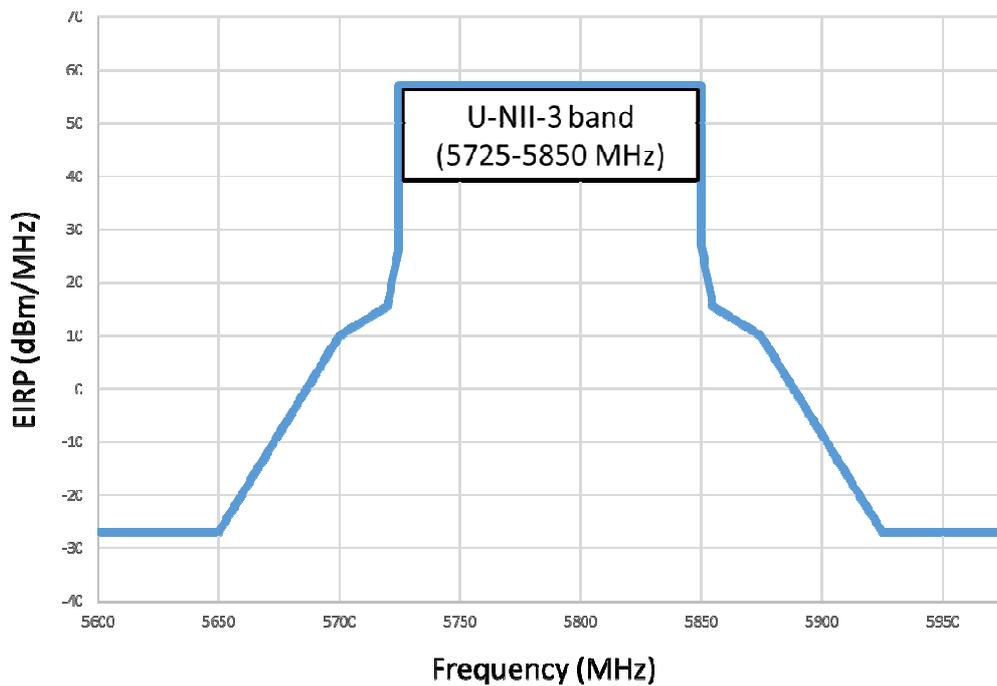

9.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:


- (1) RBW = 1 MHz
- (2) VBW $\geq 3 \times$ RBW
- (3) Detector = Peak
- (4) Sweep time = auto
- (5) Trace mode = max hold
- (6) Allow sweeps to continue until the trace stabilizes.

9.4. Test Results

Please refer to Appendix A

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

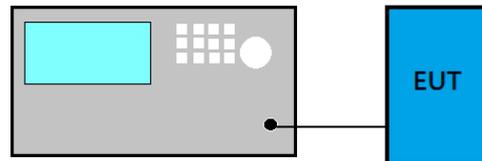

10.2. Specification Limits

Frequency Band (MHz)	Category	Limit
5150 to 5250	Outdoor Access Point	17dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz
5250 to 5350	N/A	11 dBm/MHz
5470 to 5725		11 dBm/MHz
5725 to 5850		30dBm/500 kHz

10.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ Method AVGSA-2 (Spectrum channel power)


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW) \geq 3 MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Use peak search function to find out the maximum power density.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is $<$ 98%.

10.4. Test Results

Please refer to Appendix A

11. FREQUENCY STABILITY

11.1. Block Diagram of Test Setup

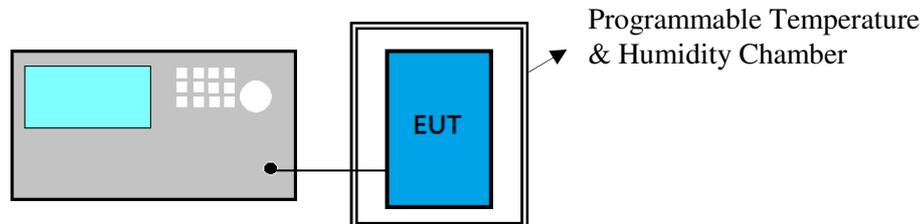

11.2. Specification Limits

NONE

11.3. Test Procedure

- (1) Frequency: Test frequency.
- (2) Span: enough to cover the complete power envelope
- (3) RBW: 1MHz(modulation ON) ; 10KHz(CW)
- (4) VBW: 1MHz(modulation ON) ; 10KHz(CW)
- (5) Detector Mode: Positive Peak
- (6) Indication mode: Max hold
- (7) Find the peak frequency and take calculate by the formula:
(Measurement Value-declaration frequency)/ declaration frequency)

11.4. Test Results

Please refer to Appendix A

12. DEVIATION TO TEST SPECIFICATIONS

【NONE】



APPDNDIX A

TEST DATA AND PLOTS


(Model: 15Z995)

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	121
A.2.3 Emissions in Non-restricted Frequency Bands.....	135
A.3 26dB/6dB BANDWIDTH	136
A.3.1 26dB/6dB Bandwidth Result	136
A.3.2 Measurement Plots	141
A.4 MAXIMUM OUTPUT POWER	161
A.4.1 Average Output Power	161
A.4.2 Measurement Plots	169
A.5 CONDUCTED BAND EDGES	180
A.6 POWER SPECTRAL DENSITY	185
A.6.1 Power Spectral Density Result	185
A.6.2 Measurement Plots	189
A.7 FREQUENCY STABILITY	208
A.7.1 Frequency stability Result	208

A.1 CONDUCTED EMISSION

Test Date	2019/12/30	Temp./Hum.	25°C/59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

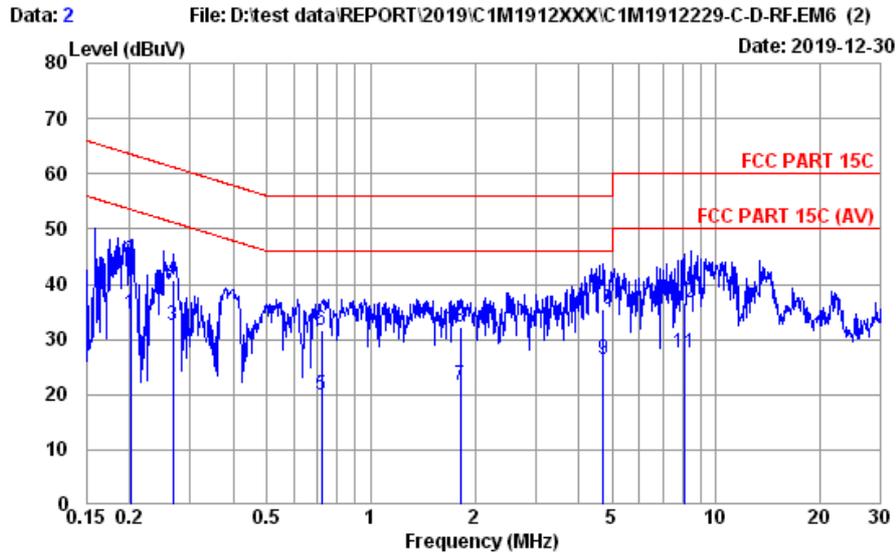


Site no. : No.8 Shielded Room Data no. : 2
 Condition : ENV4200 (169) (A) LISN Phase : NEUTRAL
 Limit : FCC PART 15C
 Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
 EUT : 15Z995
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

	ISN.	Cable	Pulse	Emission		Limits	Margin	Remark	
	Freq.	Factor	Loss	Att.	Reading	Level			
	(MHz)	(dB)	(dB)	(dB)	(dBµV)	(dBµV)	(dBµV)	(dB)	
1	0.202	10.65	0.04	9.86	14.07	34.62	53.54	18.92	Average
2	0.202	10.65	0.04	9.86	23.64	44.19	63.54	19.35	QP
3	0.267	10.60	0.04	9.86	11.89	32.39	51.20	18.81	Average
4	0.267	10.60	0.04	9.86	20.27	40.77	61.20	20.43	QP
5	0.720	10.51	0.05	9.86	-0.39	20.03	46.00	25.97	Average
6	0.720	10.51	0.05	9.86	11.25	31.67	56.00	24.33	QP
7	1.819	10.53	0.07	9.86	1.09	21.55	46.00	24.45	Average
8	1.819	10.53	0.07	9.86	11.73	32.19	56.00	23.81	QP
9	4.721	10.81	0.10	9.87	5.72	26.50	46.00	19.50	Average
10	4.721	10.81	0.10	9.87	14.68	35.46	56.00	20.54	QP
11	8.062	11.25	0.13	9.88	6.41	27.67	50.00	22.33	Average
12	8.062	11.25	0.13	9.88	15.44	36.70	60.00	23.30	QP

Remarks: 1. Emission Level= ISN. Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2019/12/30	Temp./Hum.	25°C/59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

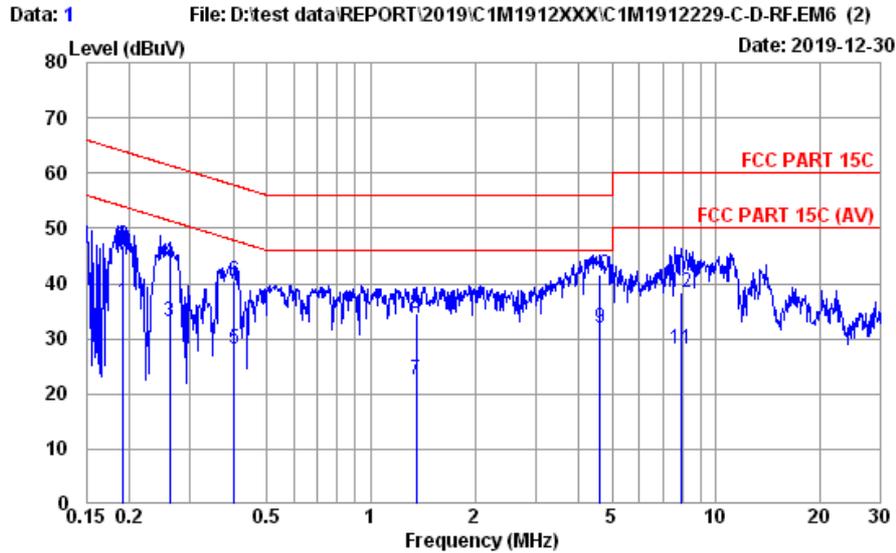

Site no. : No.8 Shielded Room Data no. : 1
 Condition : ENV4200 (169) (A) LISN Phase : LINE
 Limit : FCC PART 15C
 Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
 EUT : 15Z995
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

	ISN.	Cable	Pulse	Emission					
Freq.	Factor	Loss	Att.	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dBμV)	(dB)		
1	0.191	10.62	0.04	9.86	16.13	36.65	53.98	17.33	Average
2	0.191	10.62	0.04	9.86	26.50	47.02	63.98	16.96	QP
3	0.262	10.56	0.04	9.86	12.70	33.16	51.38	18.22	Average
4	0.262	10.56	0.04	9.86	23.55	44.01	61.38	17.37	QP
5	0.402	10.49	0.04	9.86	7.74	28.13	47.81	19.68	Average
6	0.402	10.49	0.04	9.86	19.99	40.38	57.81	17.43	QP
7	1.352	10.49	0.06	9.86	2.12	22.53	46.00	23.47	Average
8	1.352	10.49	0.06	9.86	14.13	34.54	56.00	21.46	QP
9	4.598	10.70	0.10	9.87	11.20	31.87	46.00	14.13	Average
10	4.598	10.70	0.10	9.87	20.91	41.58	56.00	14.42	QP
11	7.893	11.06	0.13	9.88	6.97	28.04	50.00	21.96	Average
12	7.893	11.06	0.13	9.88	17.45	38.52	60.00	21.48	QP

Remarks: 1. Emission Level= ISN. Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2019/12/25 ~ 26	Temp./Hum.	22°C/50 ~ 58%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Sean Wang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	UNII Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
53.28	13.98	1.62	9.25	24.85	40.00	15.15	Peak
93.05	16.05	2.20	5.59	23.84	43.50	19.66	Peak
243.40	18.50	3.88	4.54	26.92	46.00	19.08	Peak
335.55	20.76	4.99	3.90	29.65	46.00	16.35	Peak
862.26	27.02	8.25	2.42	37.69	46.00	8.31	Peak
942.77	27.64	8.71	1.57	37.92	46.00	8.08	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	25.03	1.21	9.09	35.33	40.00	4.67	Peak
52.31	14.20	1.60	21.87	37.67	40.00	2.33	Peak
119.24	18.63	2.52	7.66	28.81	43.50	14.69	Peak
179.38	15.43	3.22	12.82	31.47	43.50	12.03	Peak
515.97	23.88	6.77	4.02	34.67	46.00	11.33	Peak
910.76	27.39	8.52	1.91	37.82	46.00	8.18	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	UNII Band	NII-I
		Frequency	TX 5180MHz

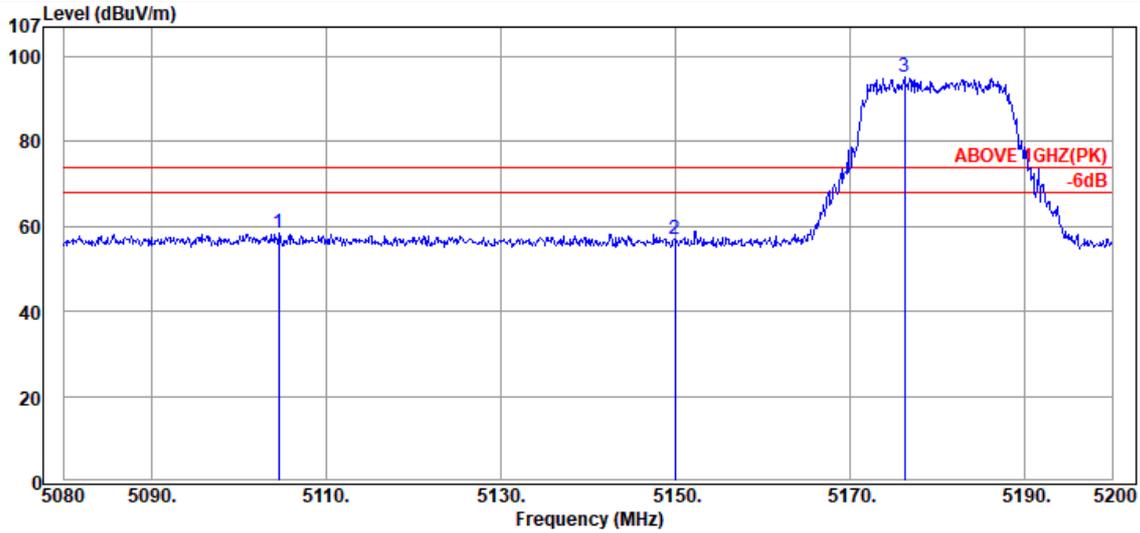

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.60	33.81	8.70	15.85	58.36	74.00	15.64	Peak
5149.96	33.90	8.73	14.38	57.01	74.00	16.99	Peak
@ 5176.24	34.00	8.74	52.39	95.13	---	---	Peak

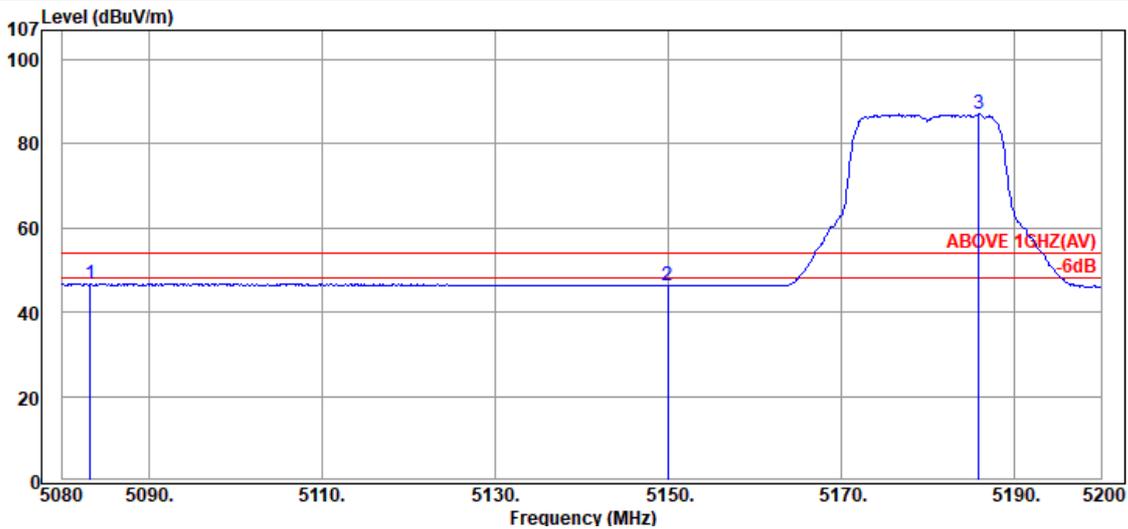


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5083.24	33.80	8.69	4.24	46.73	54.00	7.27	Average
5149.96	33.90	8.73	3.67	46.30	54.00	7.70	Average
@ 5185.84	34.04	8.75	44.23	87.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	UNII Band	NII-I
		Frequency	TX 5180MHz

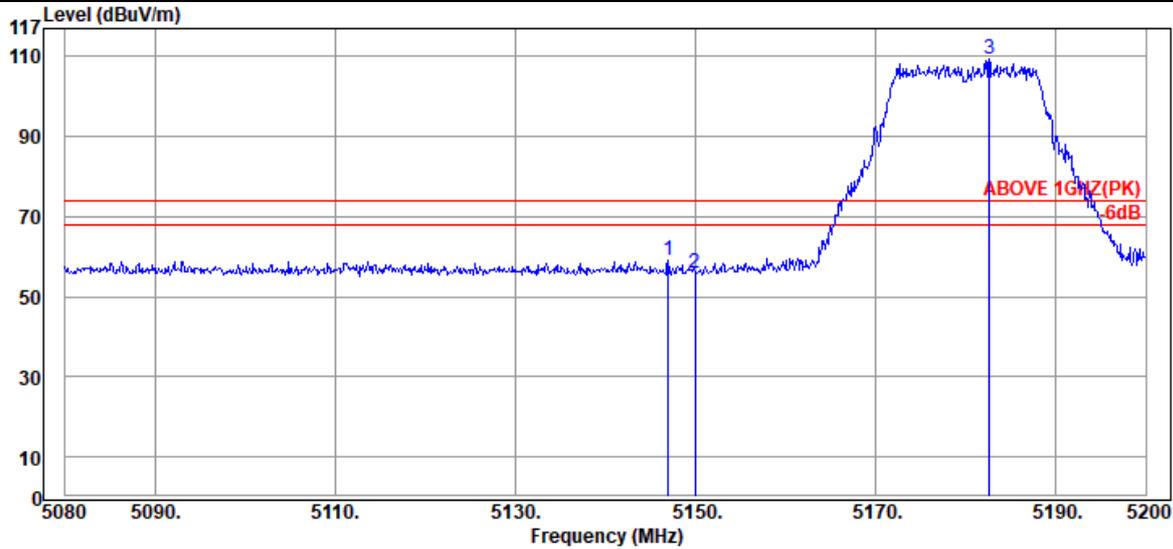

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.96	33.89	8.73	16.30	58.92	74.00	15.08	Peak
5149.96	33.90	8.73	13.09	55.72	74.00	18.28	Peak
@ 5182.60	34.03	8.75	66.71	109.49	---	---	Peak

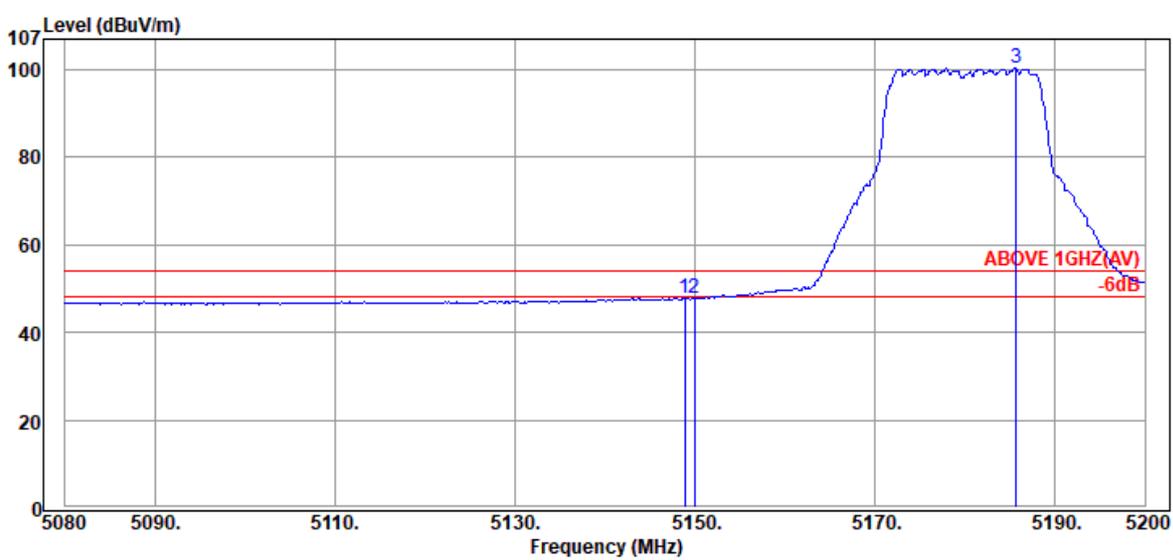


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.88	33.90	8.73	5.16	47.79	54.00	6.21	Average
5149.96	33.90	8.73	5.08	47.71	54.00	6.29	Average
@ 5185.72	34.04	8.75	57.57	100.36	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	UNII Band	NII-2A
		Frequency	TX 5320MHz

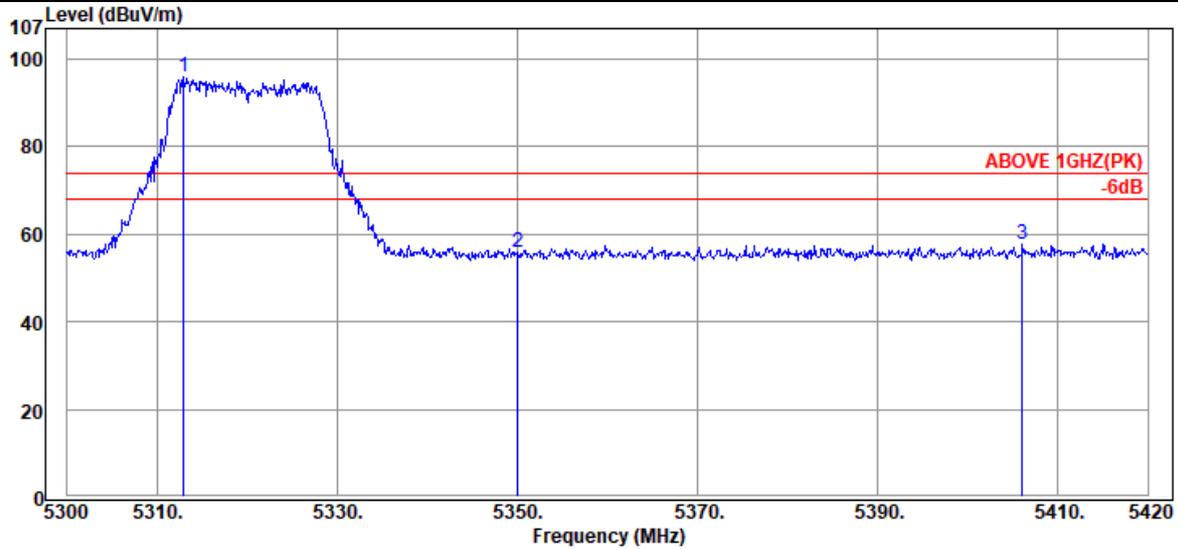

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5312.96	34.50	8.82	52.47	95.79	---	---	Peak
	5350.04	34.50	8.84	12.63	55.97	74.00	18.03	Peak
	5406.08	34.50	8.87	14.40	57.77	74.00	16.23	Peak

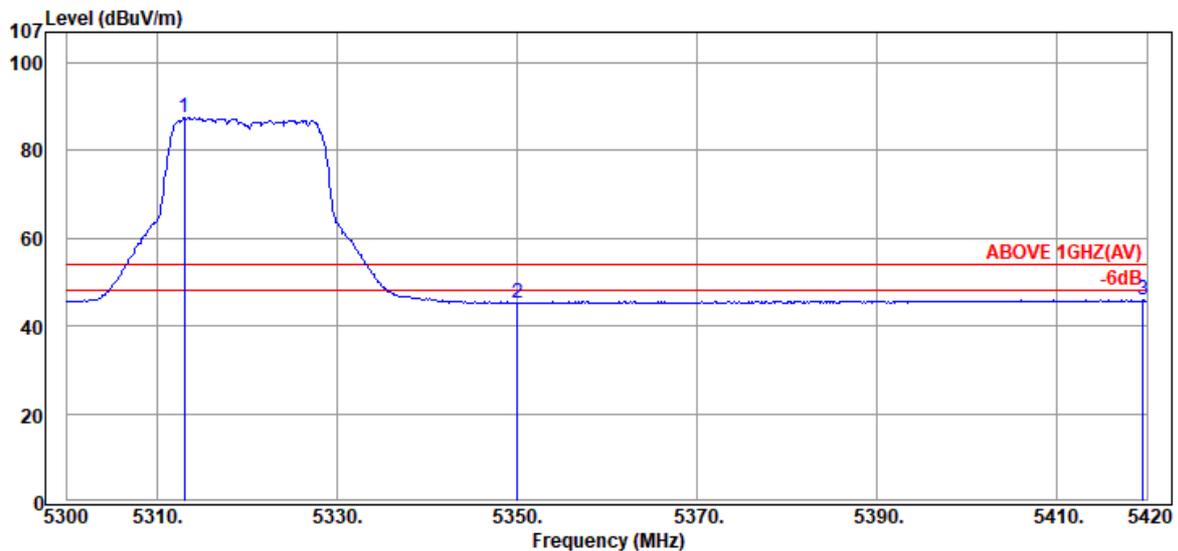


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5313.08	34.50	8.82	44.20	87.52	---	---	Average
	5350.04	34.50	8.84	2.00	45.34	54.00	8.66	Average
	5419.52	34.50	8.88	2.50	45.88	54.00	8.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	UNII Band	NII-2A
		Frequency	TX 5320MHz

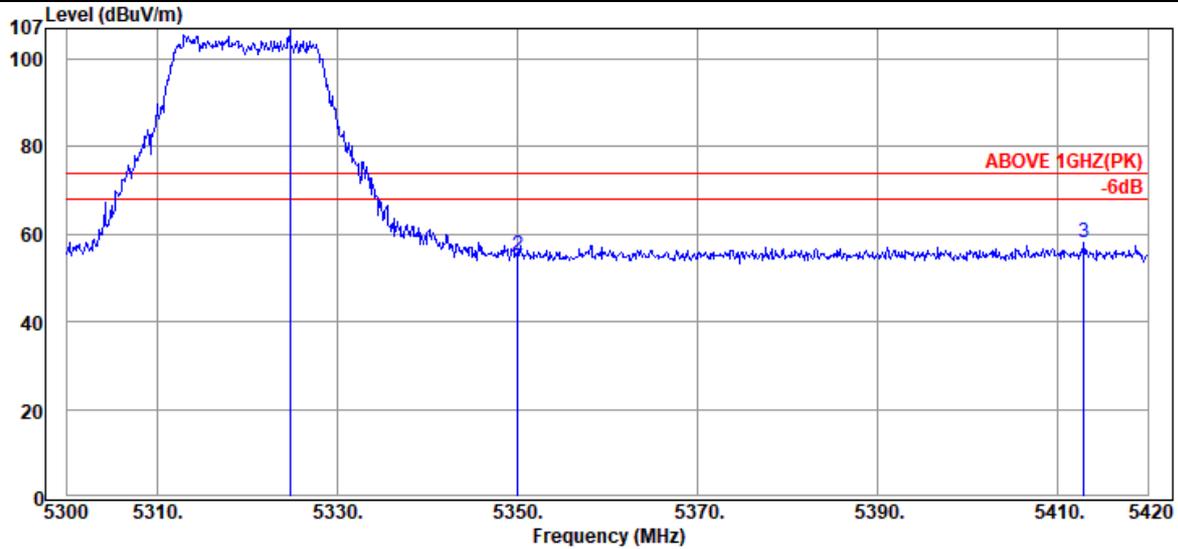

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5324.72	34.50	8.83	63.13	106.46	---	---	Peak
	5350.04	34.50	8.84	11.75	55.09	74.00	18.91	Peak
	5412.92	34.50	8.88	14.78	58.16	74.00	15.84	Peak

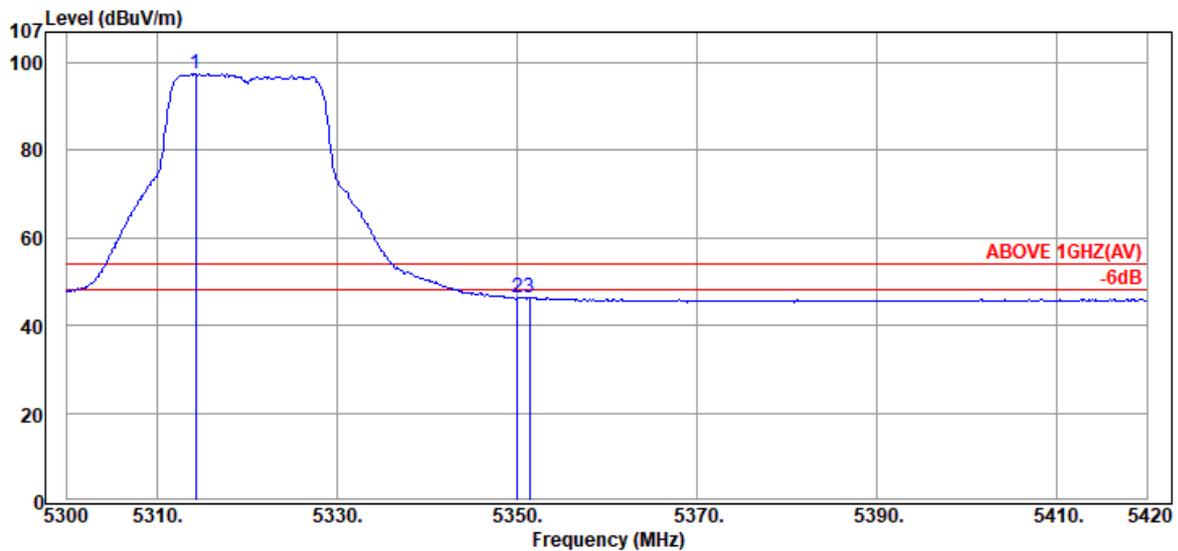


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5314.28	34.50	8.82	54.13	97.45	---	---	Average
	5350.04	34.50	8.84	2.87	46.21	54.00	7.79	Average
	5351.36	34.50	8.84	3.10	46.44	54.00	7.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	UNII Band	NII-2C
		Frequency	TX 5500MHz

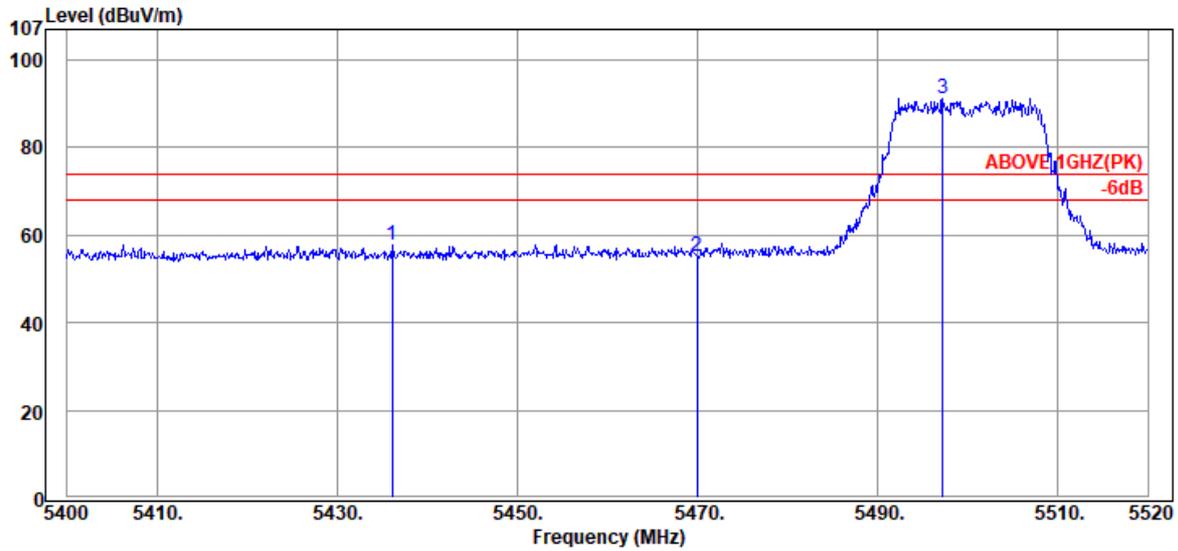

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.12	34.50	8.89	14.45	57.84	74.00	16.16	Peak
5469.96	34.50	8.91	11.79	55.20	74.00	18.80	Peak
@ 5497.20	34.50	8.92	47.77	91.19	---	---	Peak

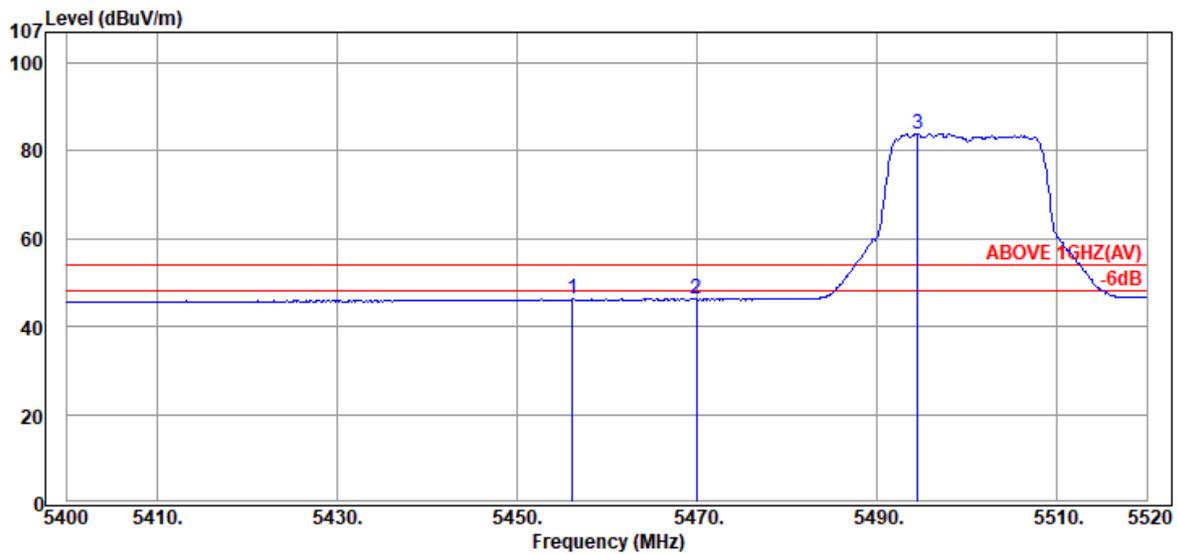


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.16	34.50	8.90	2.82	46.22	54.00	7.78	Average
5469.96	34.50	8.91	2.81	46.22	54.00	7.78	Average
@ 5494.56	34.50	8.92	40.56	83.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	UNII Band	NII-2C
		Frequency	TX 5500MHz

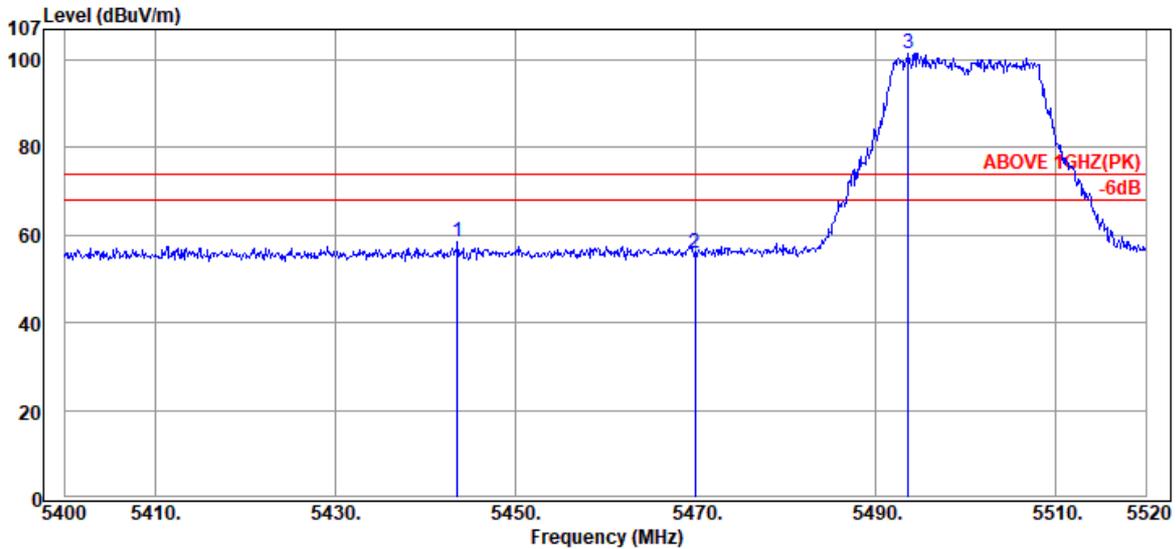

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.56	34.50	8.89	14.93	58.32	74.00	15.68	Peak
5469.96	34.50	8.91	12.60	56.01	74.00	17.99	Peak
@ 5493.60	34.50	8.92	58.07	101.49	---	---	Peak

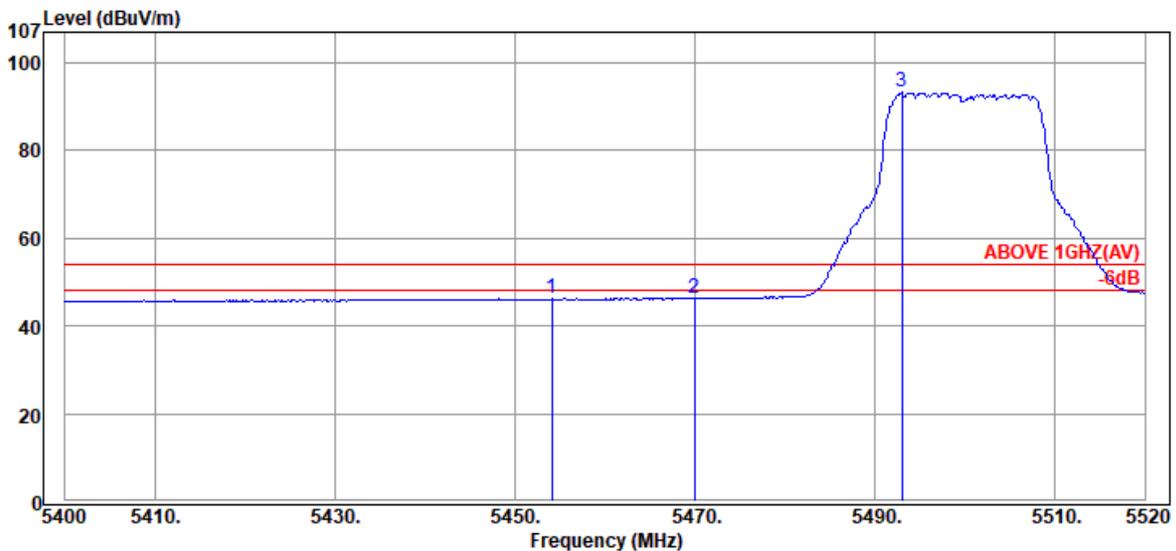


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.12	34.50	8.90	2.85	46.25	54.00	7.75	Average
5469.96	34.50	8.91	2.88	46.29	54.00	7.71	Average
@ 5493.00	34.50	8.92	49.81	93.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	UNII Band	NII-2C
		Frequency	TX 5700MHz

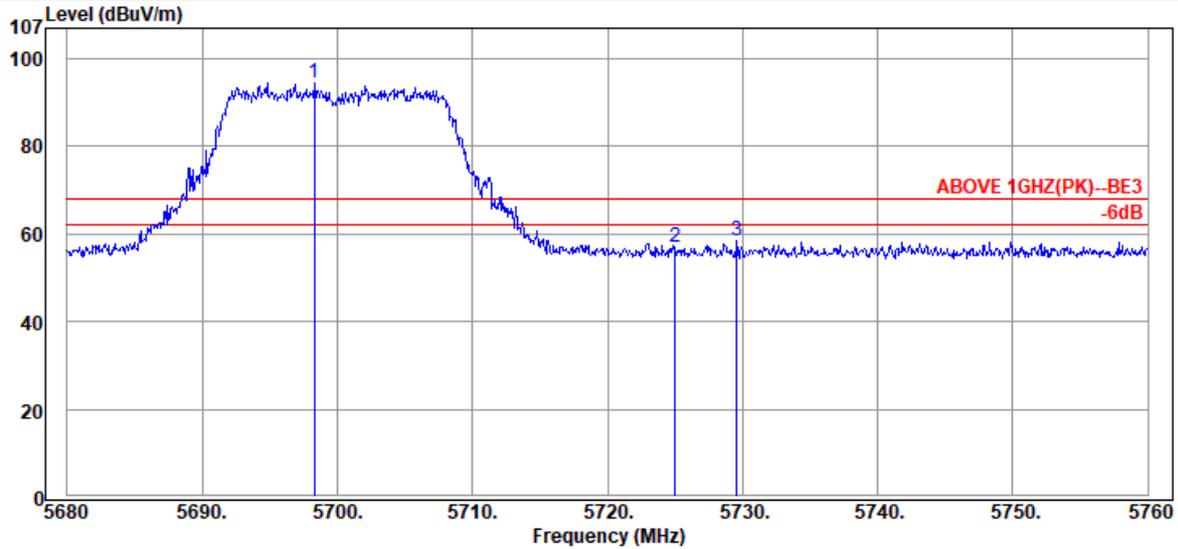

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5698.32	34.41	9.03	51.08	94.52	---	---	Peak
	5725.04	34.40	9.04	13.50	56.94	68.20	11.26	Peak
	5729.60	34.40	9.04	14.91	58.35	68.20	9.85	Peak

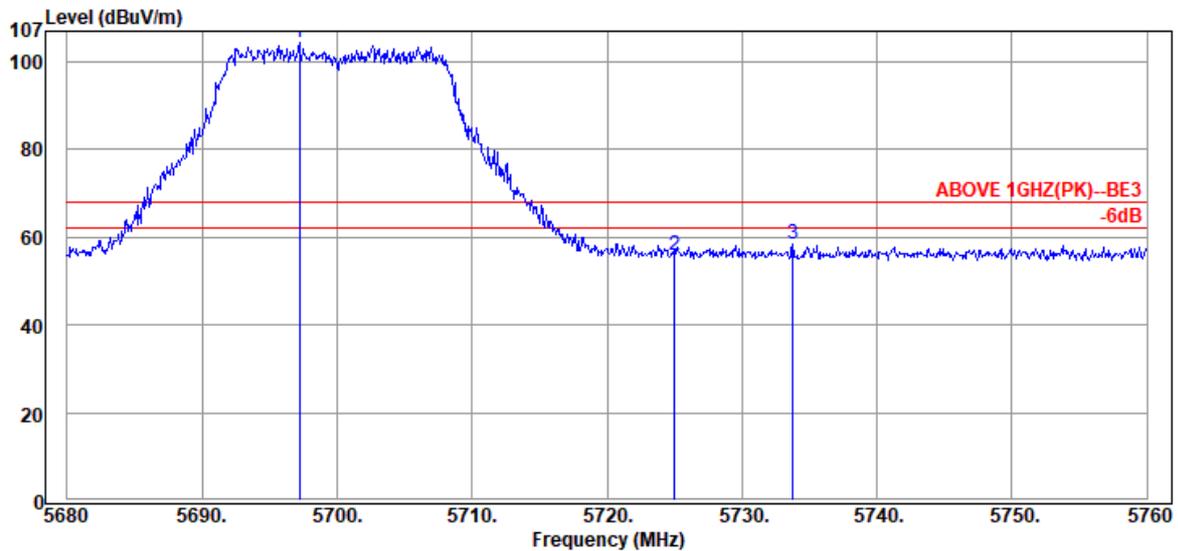


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5697.20	34.41	9.03	60.81	104.25	---	---	Peak
	5725.04	34.40	9.04	12.46	55.90	68.20	12.30	Peak
	5733.76	34.40	9.05	15.01	58.46	68.20	9.74	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	UNII Band	NII-2C
		Frequency	TX 5720MHz

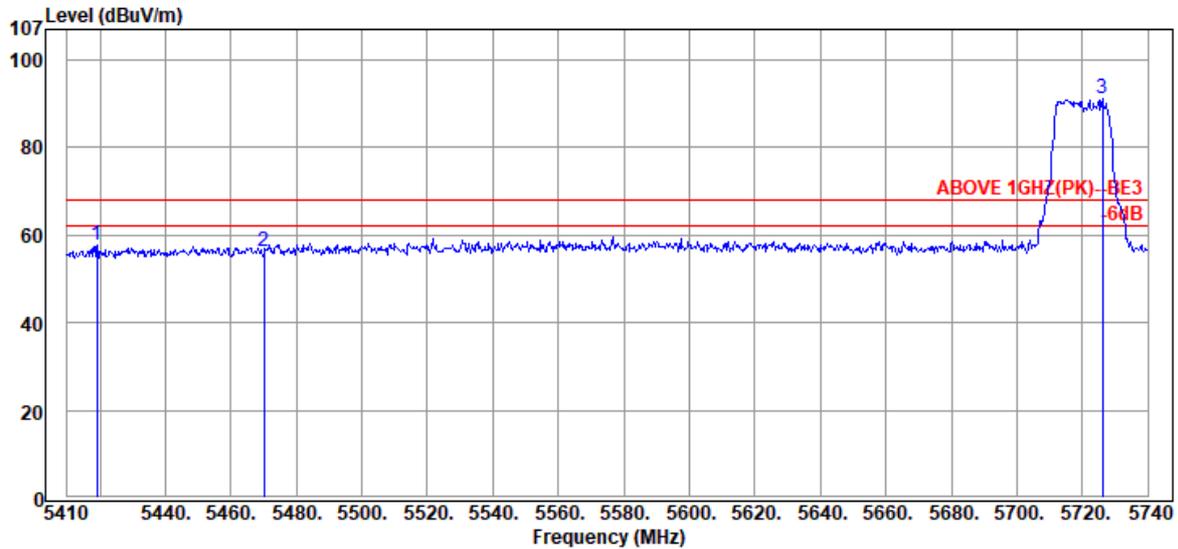

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.24	34.50	8.88	14.44	57.82	68.20	10.38	Peak
5470.06	34.50	8.91	12.82	56.23	68.20	11.97	Peak
@ 5726.14	34.40	9.04	47.74	91.18	---	---	Peak

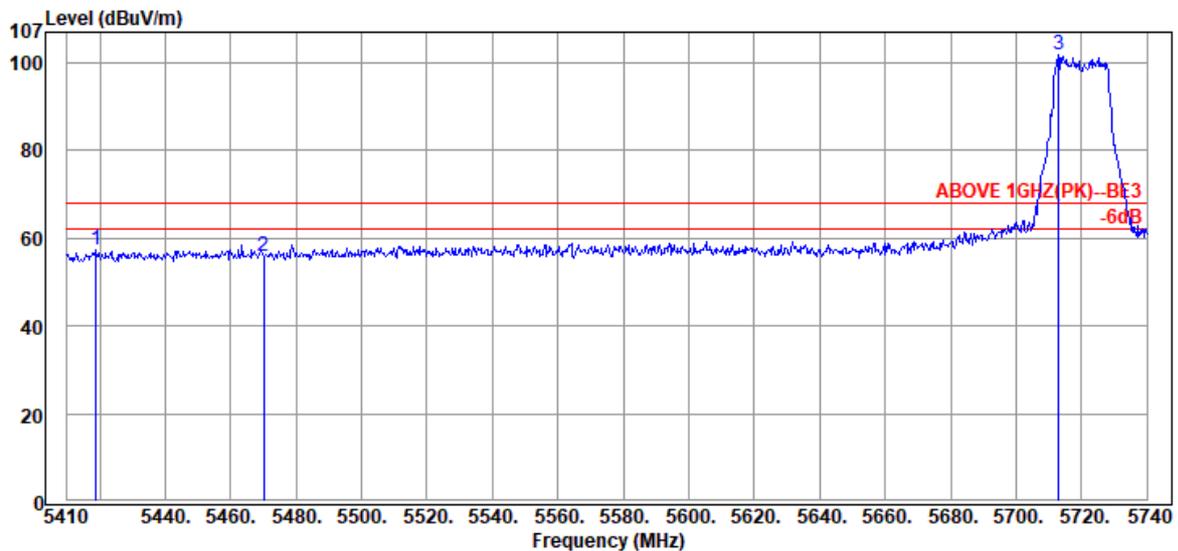


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.91	34.50	8.88	13.94	57.32	68.20	10.88	Peak
5470.06	34.50	8.91	12.63	56.04	68.20	12.16	Peak
@ 5712.94	34.40	9.03	58.25	101.68	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	UNII Band	NII-2C
		Frequency	TX 5720MHz

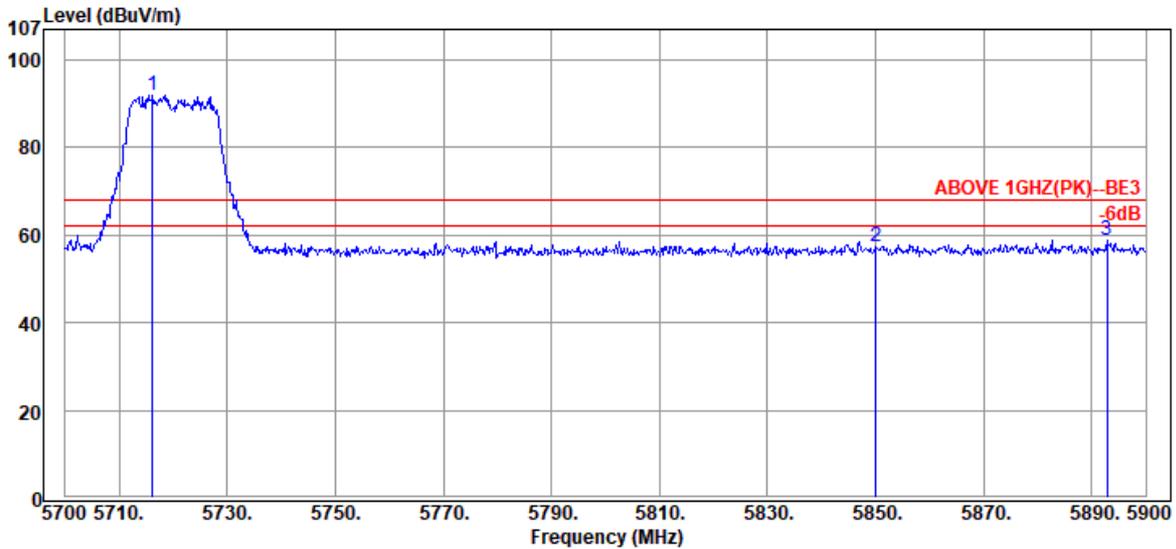

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5716.20	34.40	9.04	48.42	91.86	---	---	Peak
5850.00	34.40	9.11	13.93	57.44	68.20	10.76	Peak
@ 5892.80	34.49	9.13	15.09	58.71	68.20	9.49	Peak

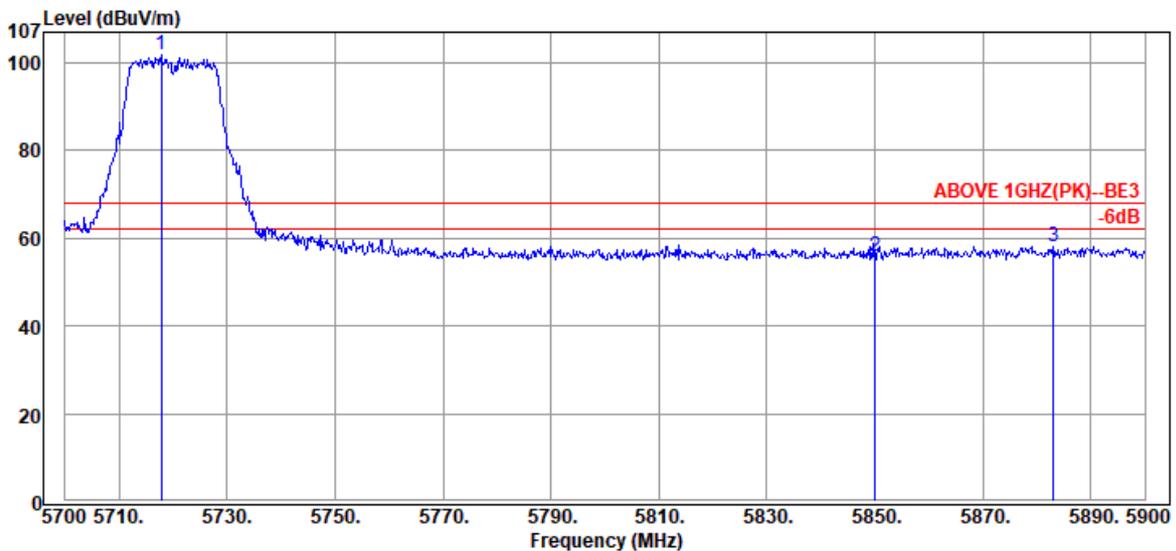


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5717.80	34.40	9.04	58.30	101.74	---	---	Peak
5850.00	34.40	9.11	12.29	55.80	68.20	12.40	Peak
@ 5883.00	34.47	9.12	14.69	58.28	68.20	9.92	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-I
		Frequency	TX 5180MHz

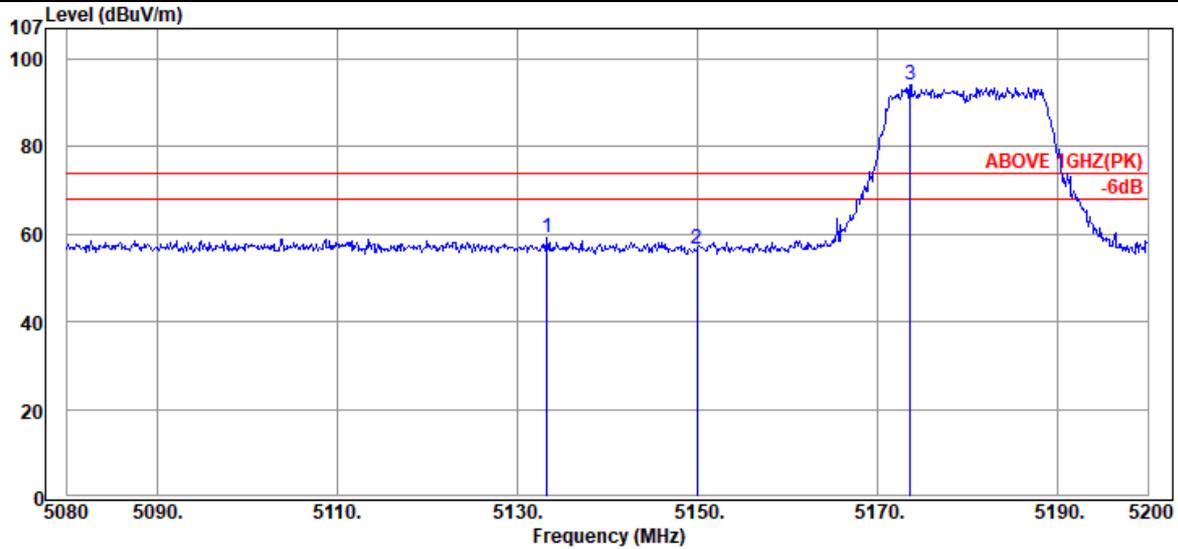

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.28	33.87	8.72	16.48	59.07	74.00	14.93	Peak
5149.96	33.90	8.73	14.07	56.70	74.00	17.30	Peak
@ 5173.60	33.99	8.74	51.24	93.97	---	---	Peak

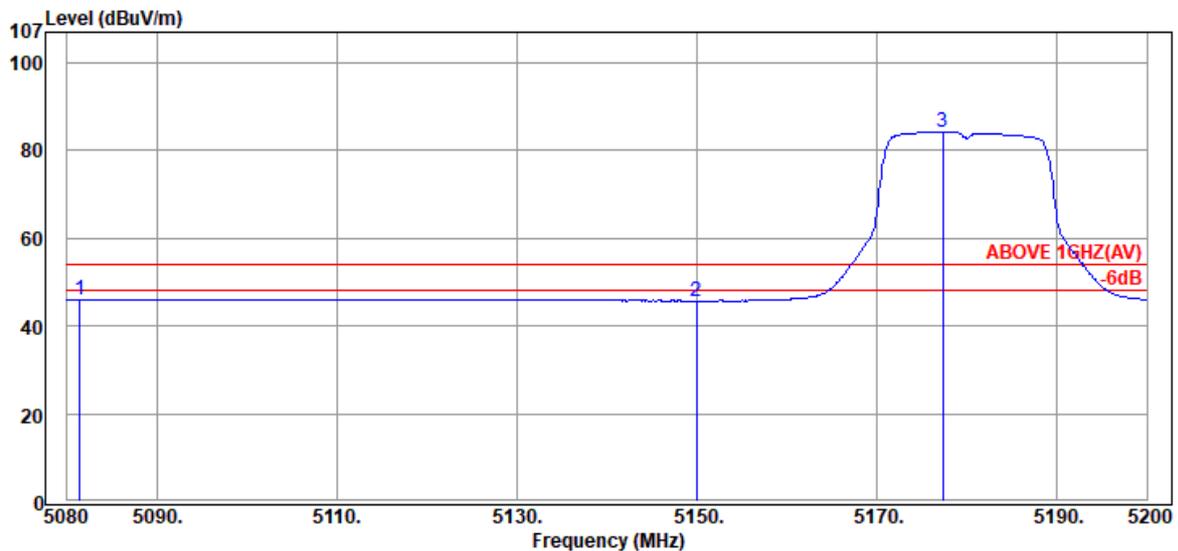


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5081.44	33.80	8.69	3.60	46.09	54.00	7.91	Average
5149.96	33.90	8.73	3.10	45.73	54.00	8.27	Average
@ 5177.32	34.01	8.74	41.50	84.25	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-
		Frequency	TX 5180MHz

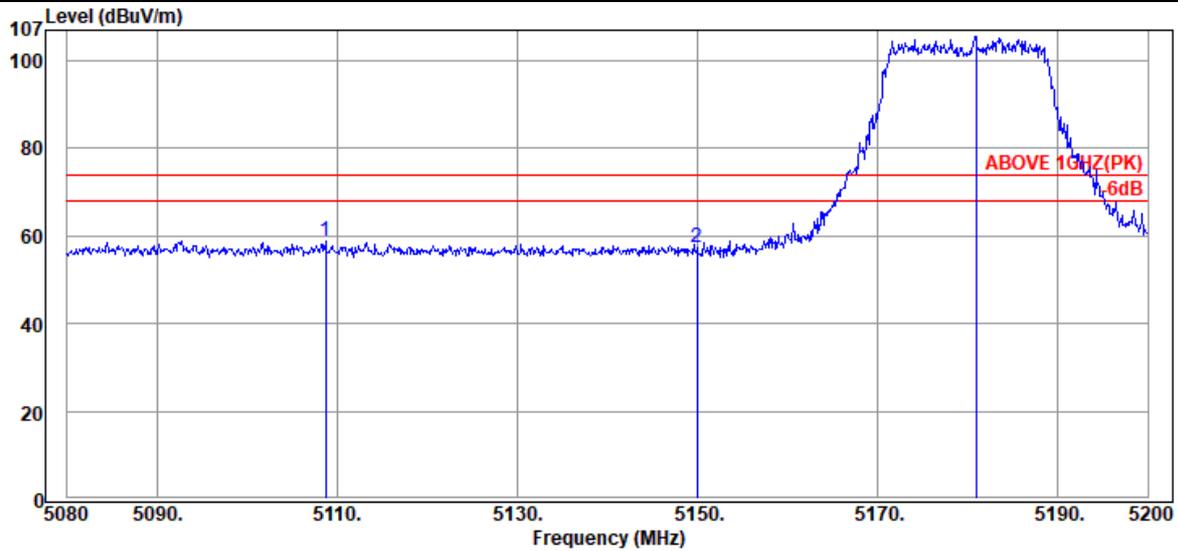

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.68	33.82	8.70	16.43	58.95	74.00	15.05	Peak
5149.96	33.90	8.73	14.75	57.38	74.00	16.62	Peak
@ 5180.92	34.02	8.75	62.69	105.46	---	---	Peak

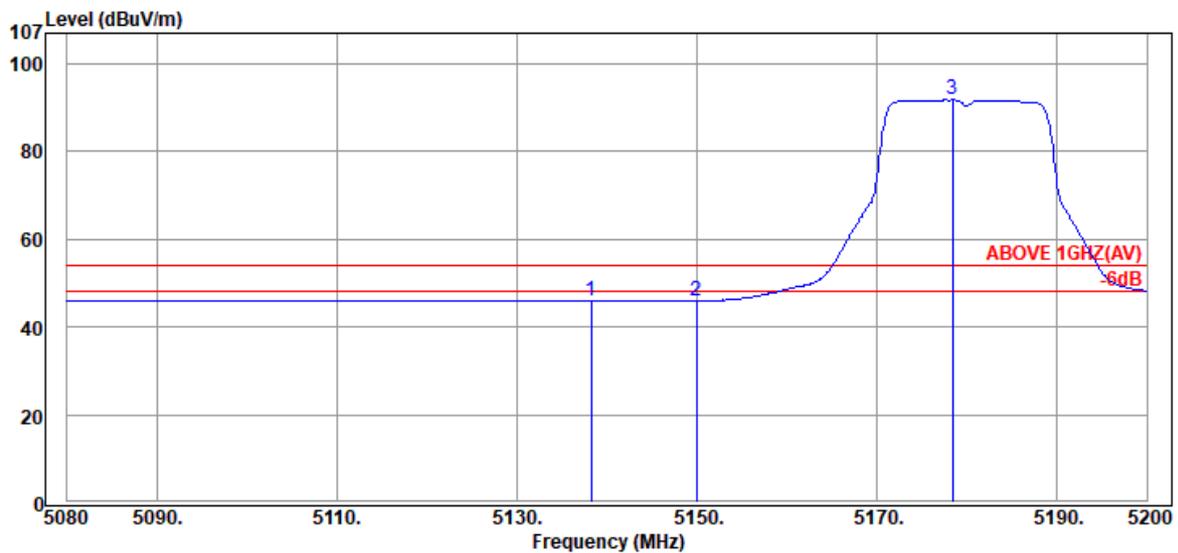


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.20	33.88	8.72	3.54	46.14	54.00	7.86	Average
5149.96	33.90	8.73	3.45	46.08	54.00	7.92	Average
@ 5178.40	34.01	8.74	49.03	91.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-2A
		Frequency	TX 5320MHz

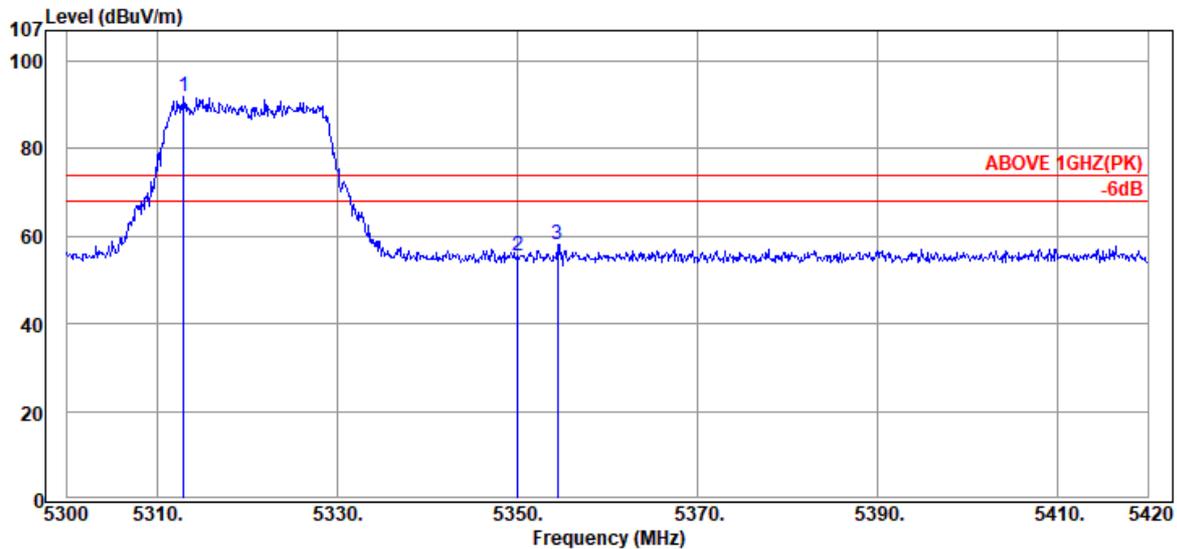

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5312.96	34.50	8.82	48.54	91.86	---	---	Peak
	5350.04	34.50	8.84	12.03	55.37	74.00	18.63	Peak
	5354.48	34.50	8.84	14.64	57.98	74.00	16.02	Peak

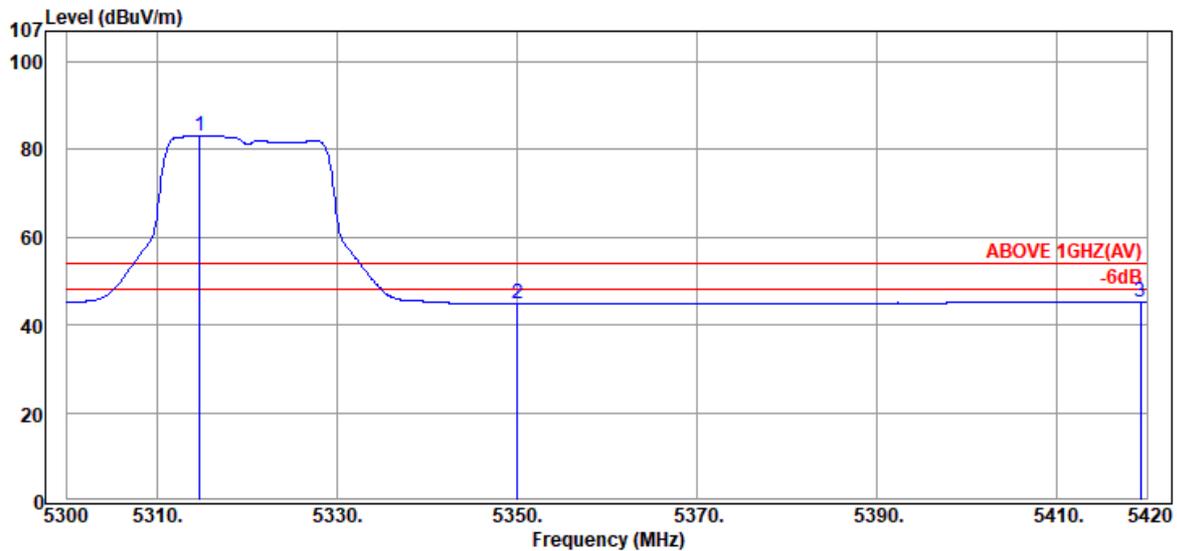


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5314.76	34.50	8.82	39.93	83.25	---	---	Average
	5350.04	34.50	8.84	1.53	44.87	54.00	9.13	Average
	5419.28	34.50	8.88	1.86	45.24	54.00	8.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-2A
		Frequency	TX 5320MHz

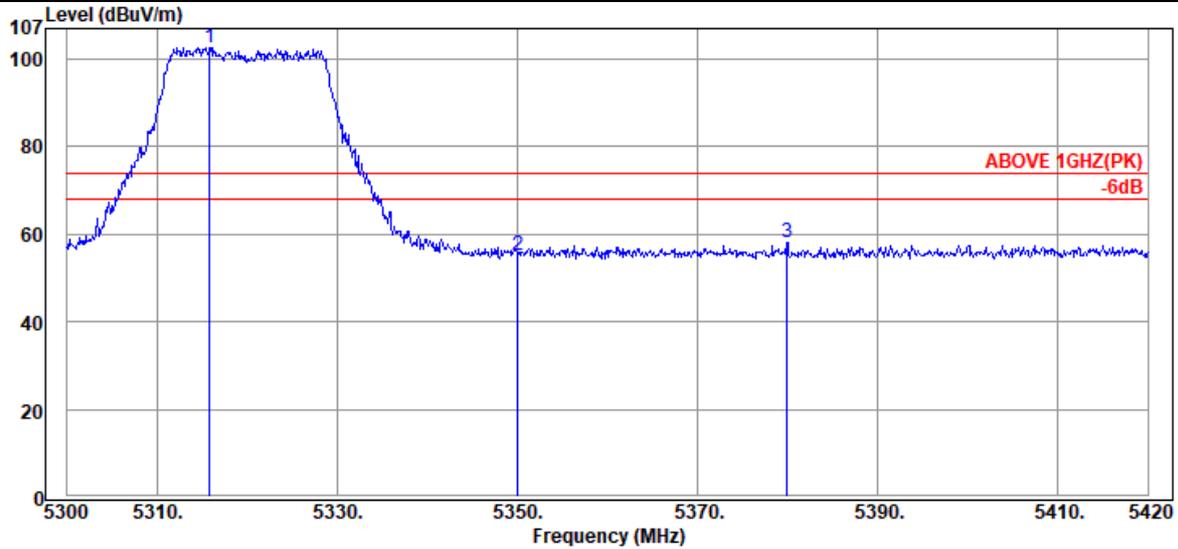

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5315.84	34.50	8.82	59.34	102.66	---	---	Peak
	5350.04	34.50	8.84	11.69	55.03	74.00	18.97	Peak
	5379.92	34.50	8.86	14.64	58.00	74.00	16.00	Peak

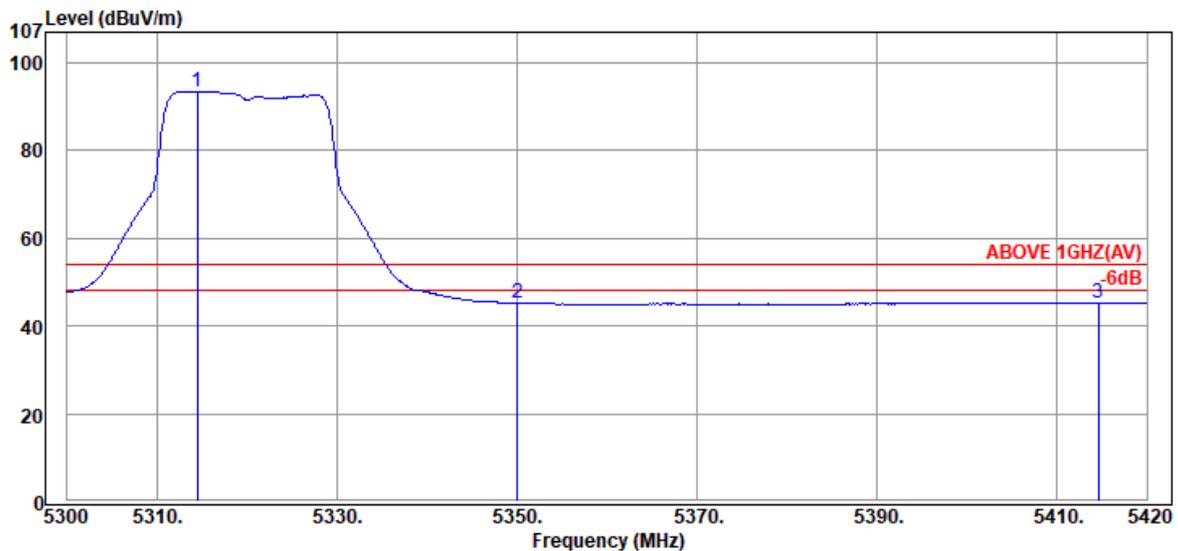


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5314.52	34.50	8.82	50.18	93.50	---	---	Average
	5350.04	34.50	8.84	1.86	45.20	54.00	8.80	Average
	5414.60	34.50	8.88	1.96	45.34	54.00	8.66	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-2C
		Frequency	TX 5500MHz

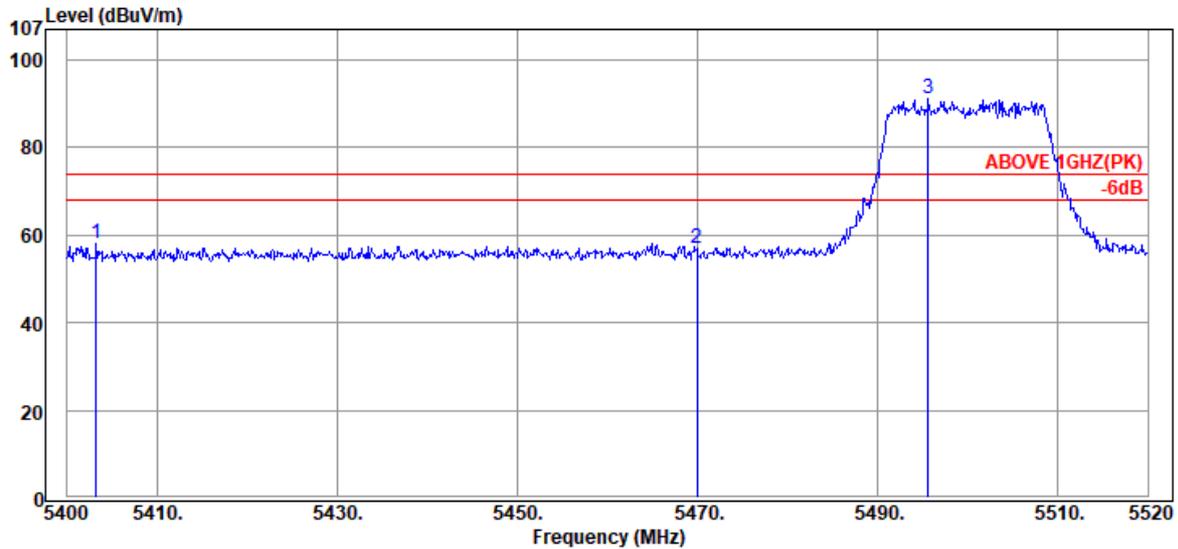

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5403.24	34.50	8.87	14.64	58.01	74.00	15.99	Peak
5469.96	34.50	8.91	13.62	57.03	74.00	16.97	Peak
@ 5495.64	34.50	8.92	47.64	91.06	---	---	Peak

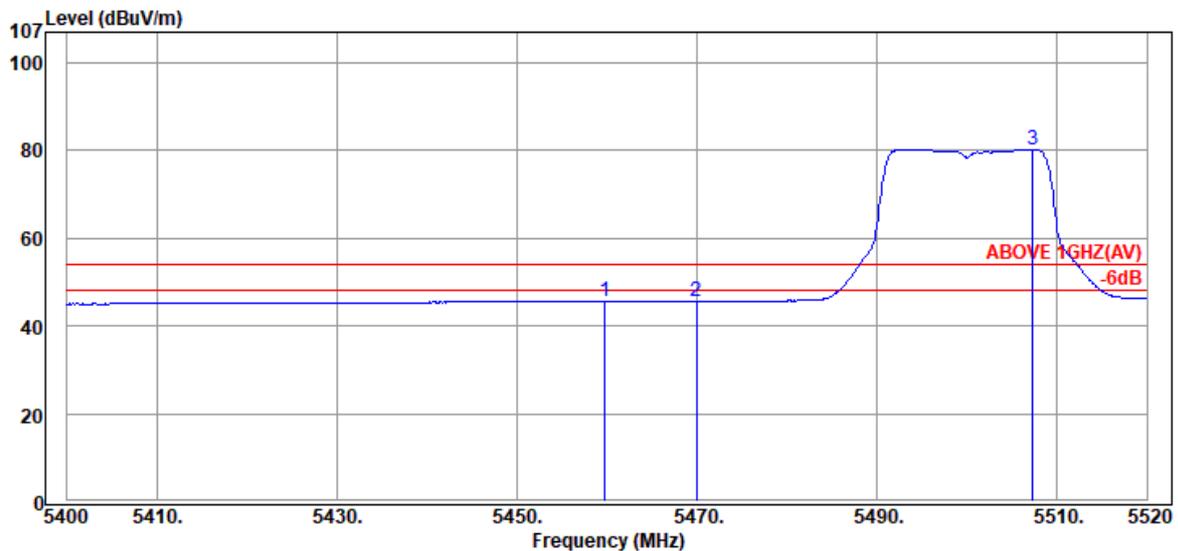


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.76	34.50	8.90	2.19	45.59	54.00	8.41	Average
5469.96	34.50	8.91	2.24	45.65	54.00	8.35	Average
@ 5507.28	34.51	8.93	36.79	80.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-2C
		Frequency	TX 5500MHz

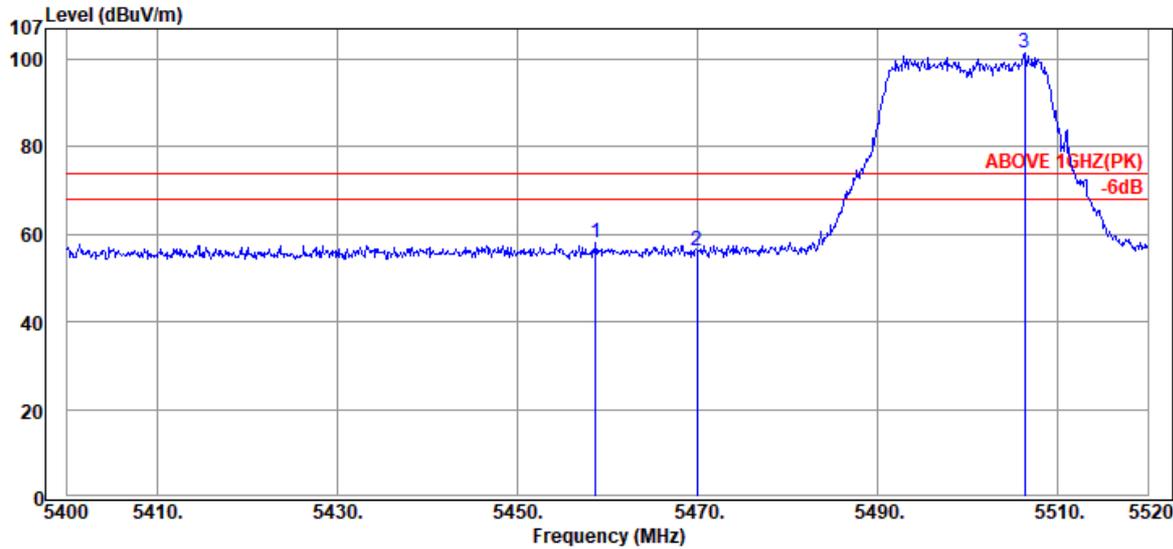

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.68	34.50	8.90	14.80	58.20	74.00	15.80	Peak
5469.96	34.50	8.91	12.70	56.11	74.00	17.89	Peak
@ 5506.32	34.51	8.93	57.97	101.41	---	---	Peak

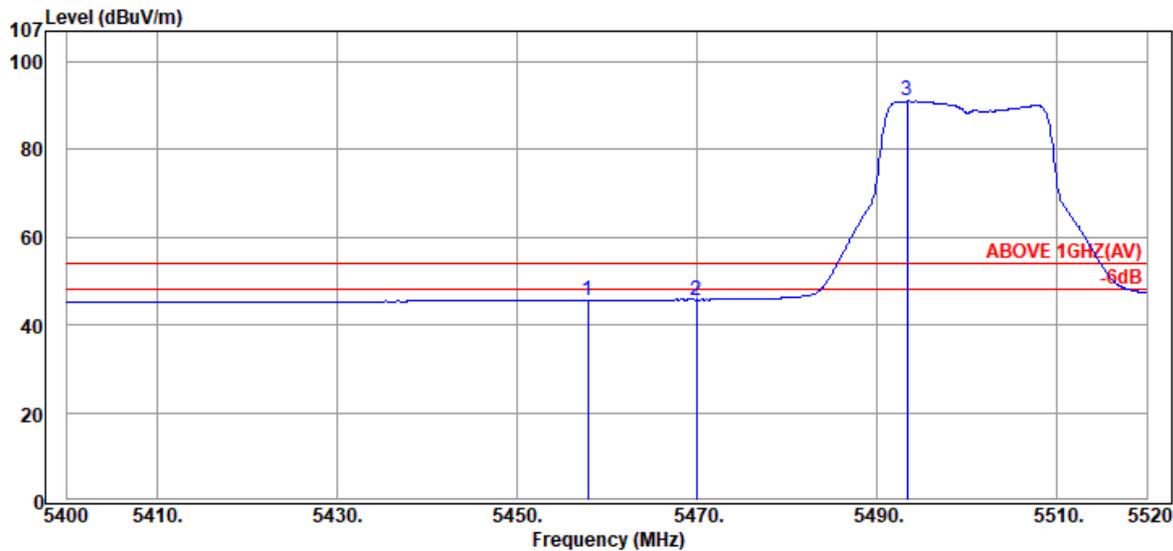


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.84	34.50	8.90	2.30	45.70	54.00	8.30	Average
5469.96	34.50	8.91	2.37	45.78	54.00	8.22	Average
@ 5493.36	34.50	8.92	47.62	91.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-2C
		Frequency	TX 5700MHz

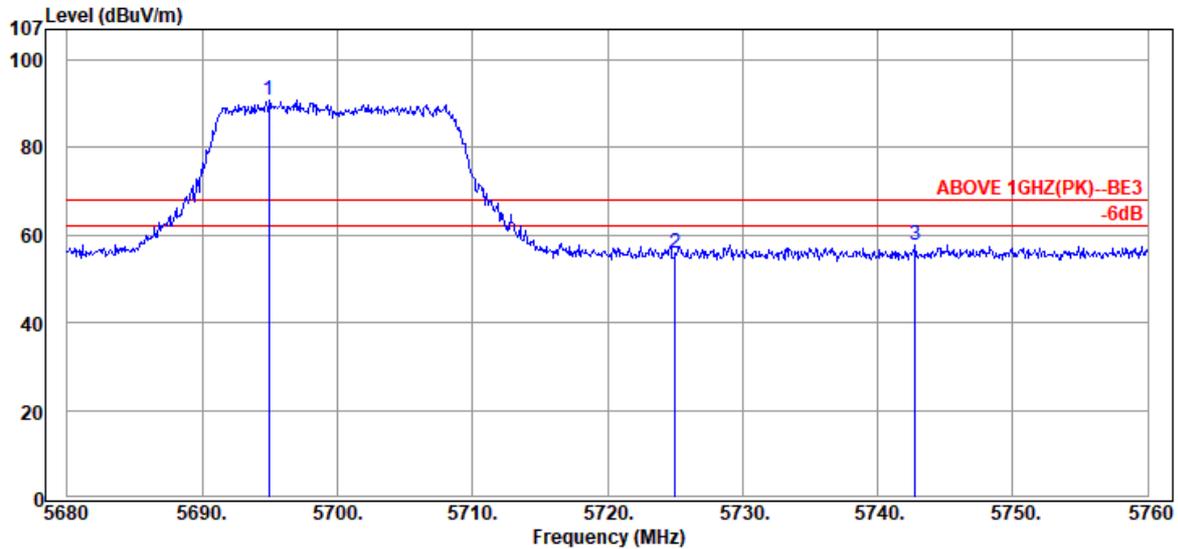

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5694.96	34.42	9.03	47.34	90.79	---	---	Peak
	5725.04	34.40	9.04	12.48	55.92	68.20	12.28	Peak
	5742.80	34.40	9.05	14.21	57.66	68.20	10.54	Peak

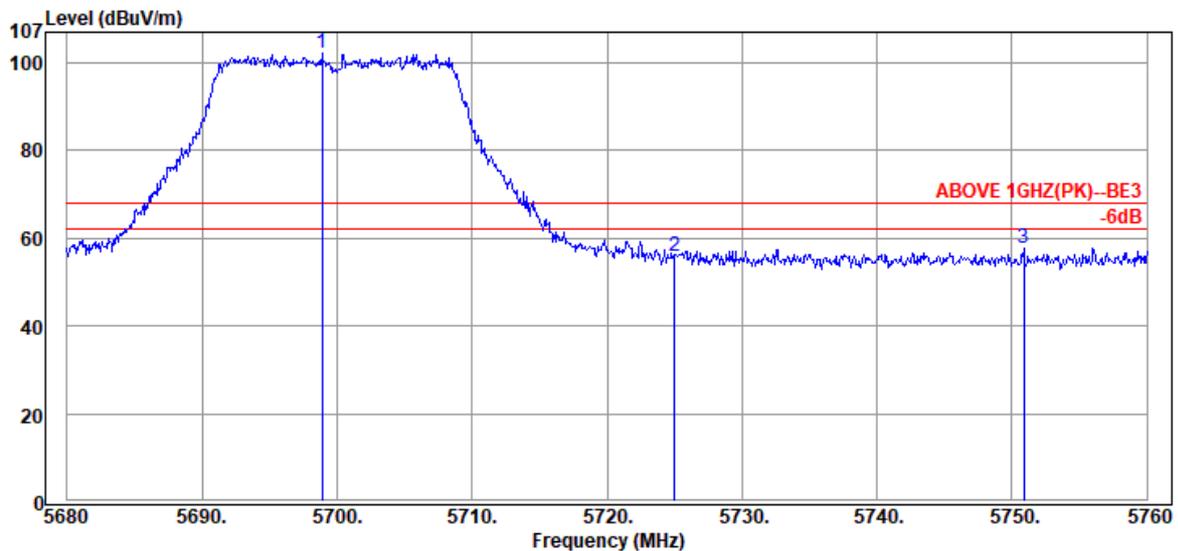


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5698.88	34.40	9.03	58.76	102.19	---	---	Peak
	5725.04	34.40	9.04	12.41	55.85	68.20	12.35	Peak
	5750.88	34.40	9.05	14.20	57.65	68.20	10.55	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-2C
		Frequency	TX 5720MHz

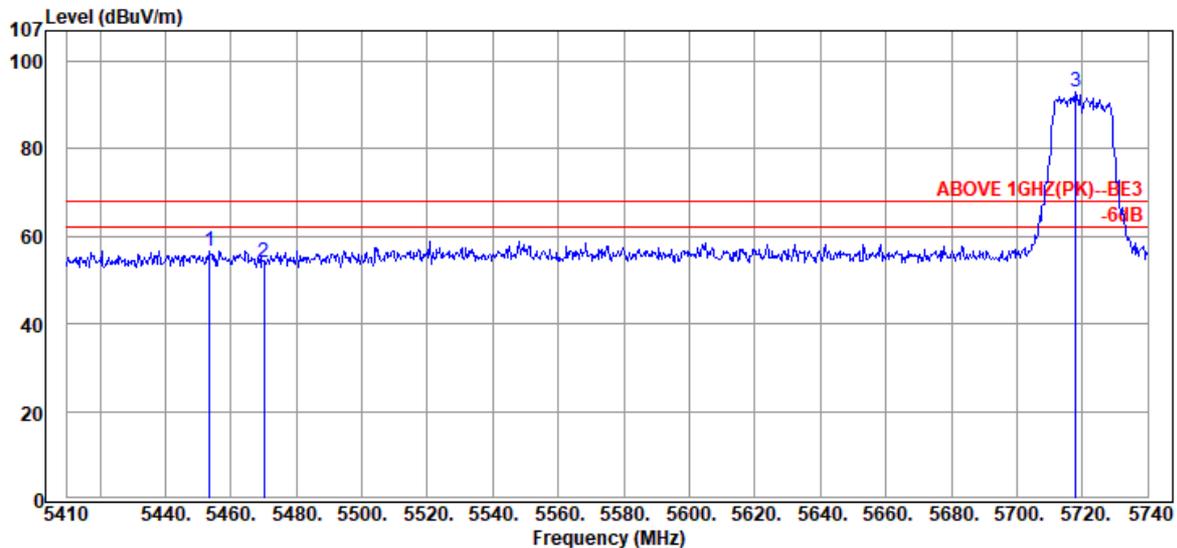

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.56	34.50	8.90	13.23	56.63	68.20	11.57	Peak
5470.06	34.50	8.91	10.57	53.98	68.20	14.22	Peak
@ 5717.89	34.40	9.04	49.69	93.13	---	---	Peak

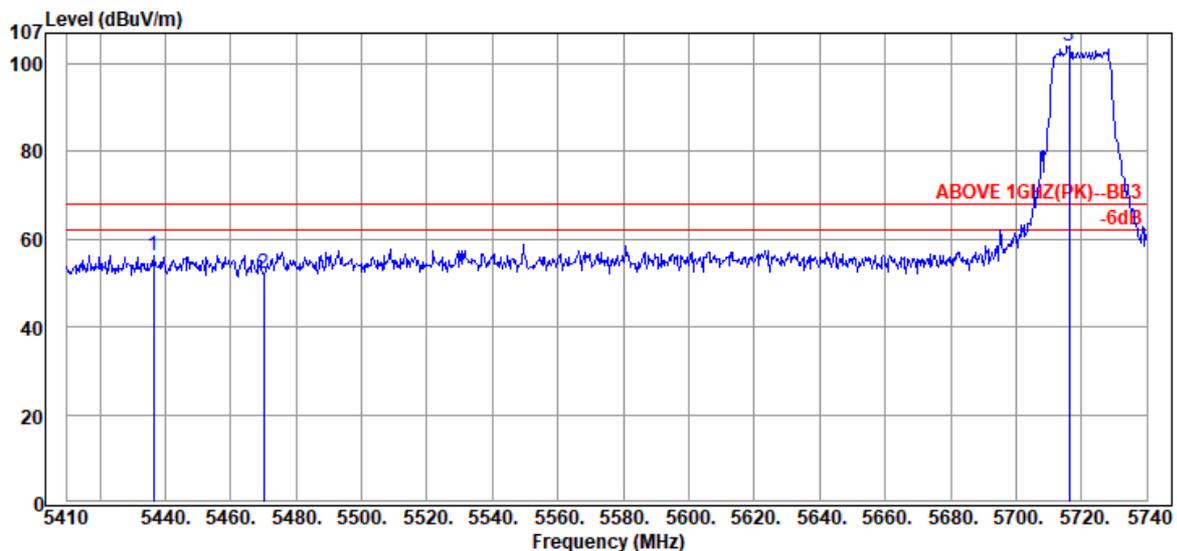


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.40	34.50	8.89	12.98	56.37	68.20	11.83	Peak
5470.06	34.50	8.91	8.96	52.37	68.20	15.83	Peak
@ 5716.24	34.40	9.04	60.69	104.13	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	UNII Band	NII-2C
		Frequency	TX 5720MHz

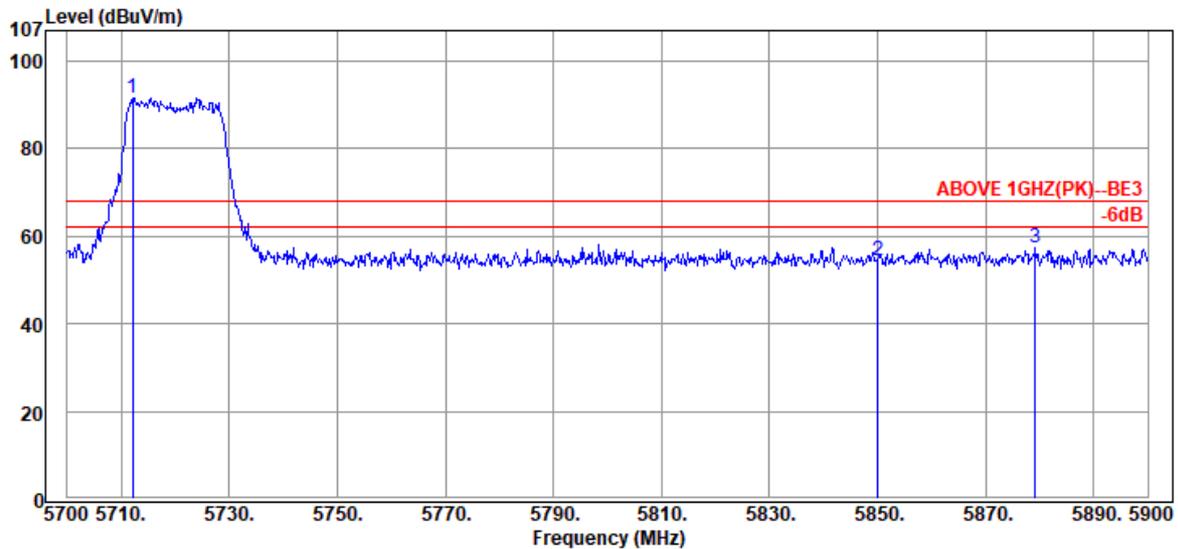

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5712.20	34.40	9.03	48.10	91.53	---	---	Peak
	5850.00	34.40	9.11	10.89	54.40	68.20	13.80	Peak
	5879.20	34.46	9.12	13.67	57.25	68.20	10.95	Peak

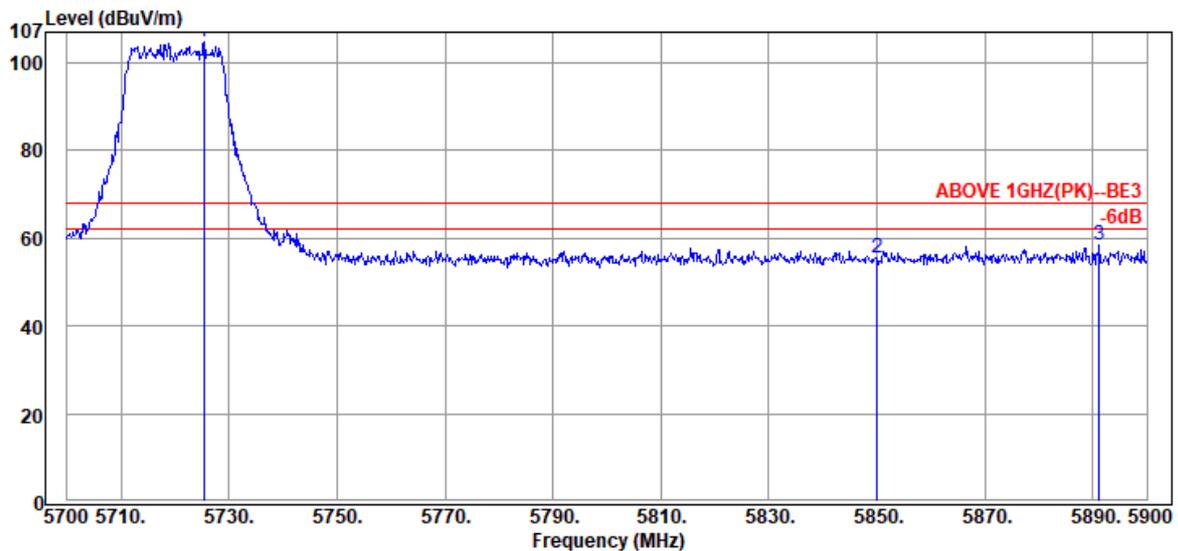


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5725.40	34.40	9.04	61.36	104.80	---	---	Peak
	5850.00	34.40	9.11	12.16	55.67	68.20	12.53	Peak
	5891.20	34.48	9.13	14.71	58.32	68.20	9.88	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-I
		Frequency	TX 5190MHz

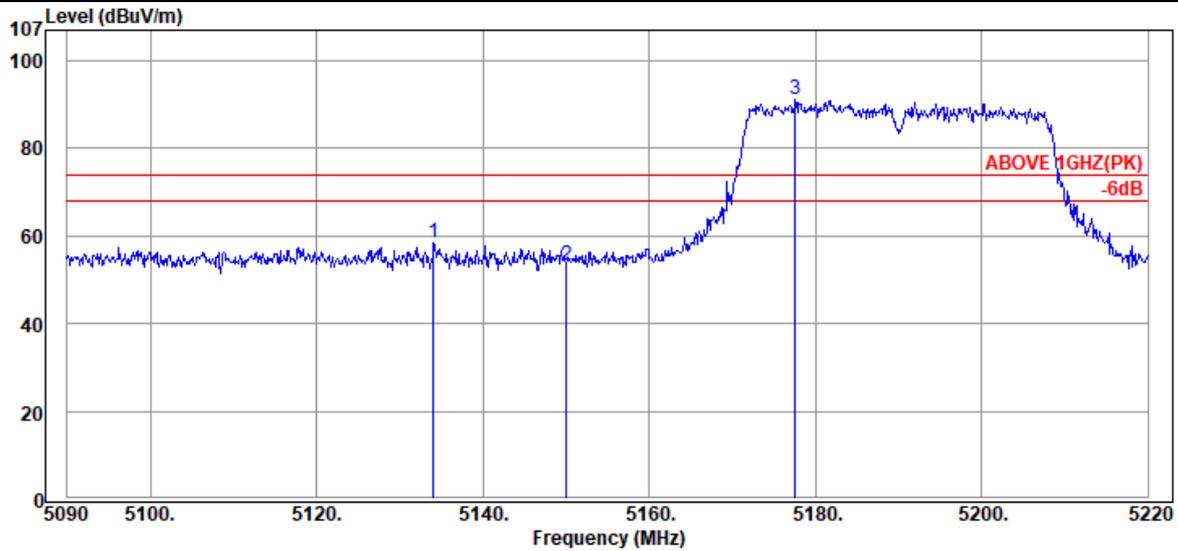

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.07	33.87	8.72	15.80	58.39	74.00	15.61	Peak
5150.06	33.90	8.73	10.51	53.14	74.00	20.86	Peak
@ 5177.62	34.01	8.74	48.55	91.30	---	---	Peak

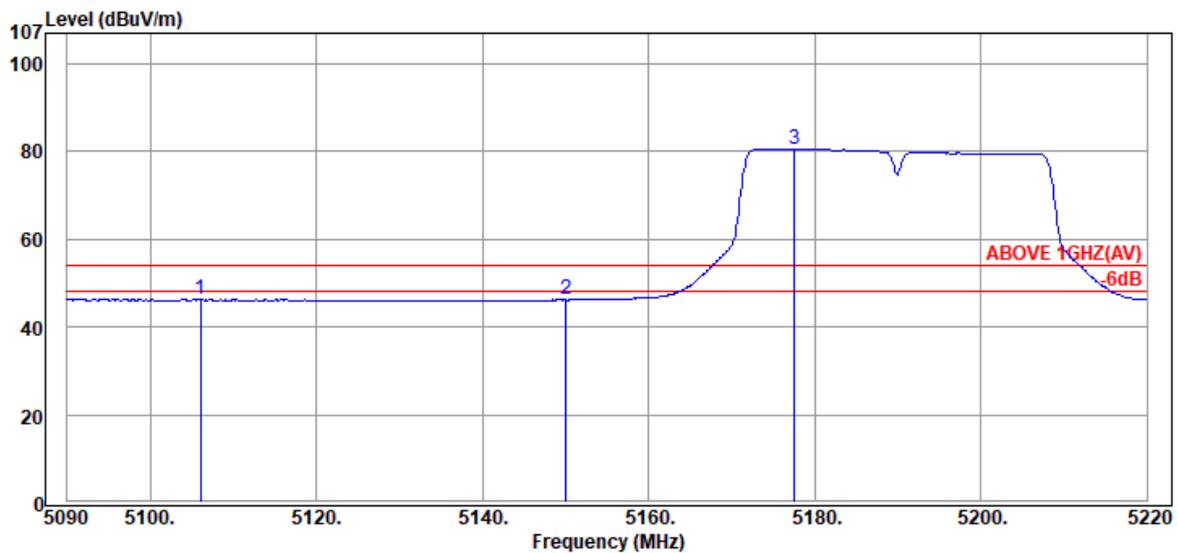


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.12	33.81	8.70	3.70	46.21	54.00	7.79	Average
5150.06	33.90	8.73	3.52	46.15	54.00	7.85	Average
@ 5177.62	34.01	8.74	37.90	80.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-I
		Frequency	TX 5190MHz

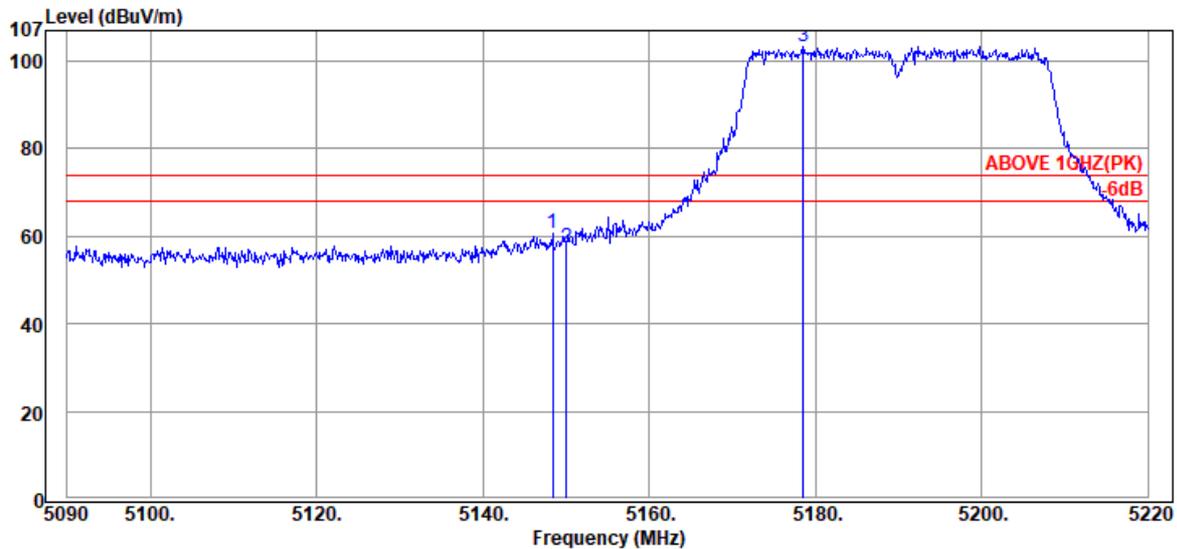

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.37	33.90	8.73	17.94	60.57	74.00	13.43	Peak
5150.06	33.90	8.73	14.75	57.38	74.00	16.62	Peak
@ 5178.53	34.01	8.74	60.54	103.29	---	---	Peak

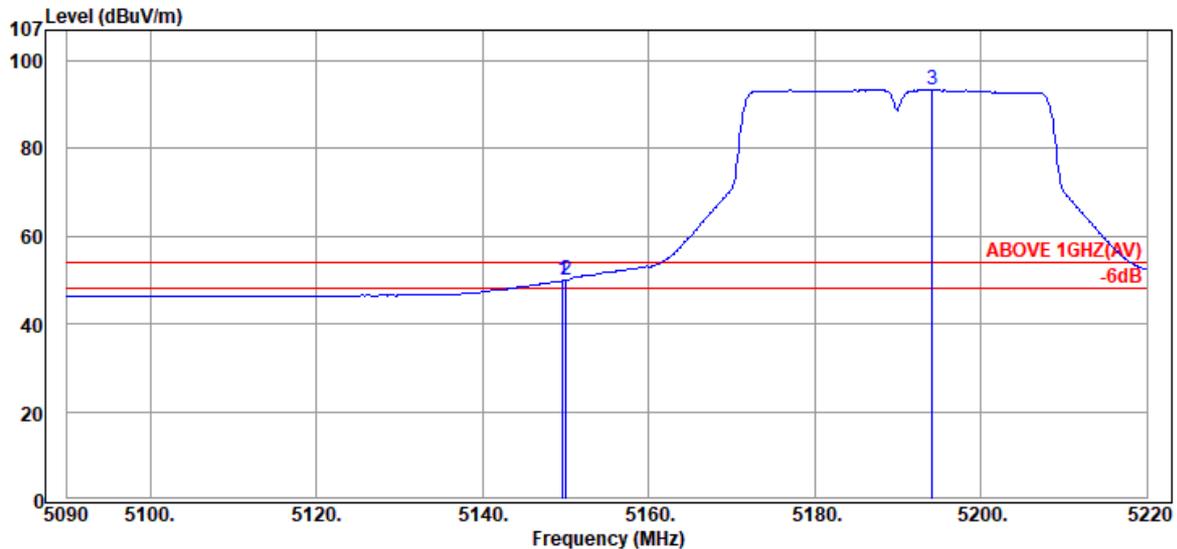


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	7.28	49.91	54.00	4.09	Average
5150.06	33.90	8.73	7.47	50.10	54.00	3.90	Average
@ 5194.13	34.08	8.75	50.57	93.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-2A
		Frequency	TX 5310MHz

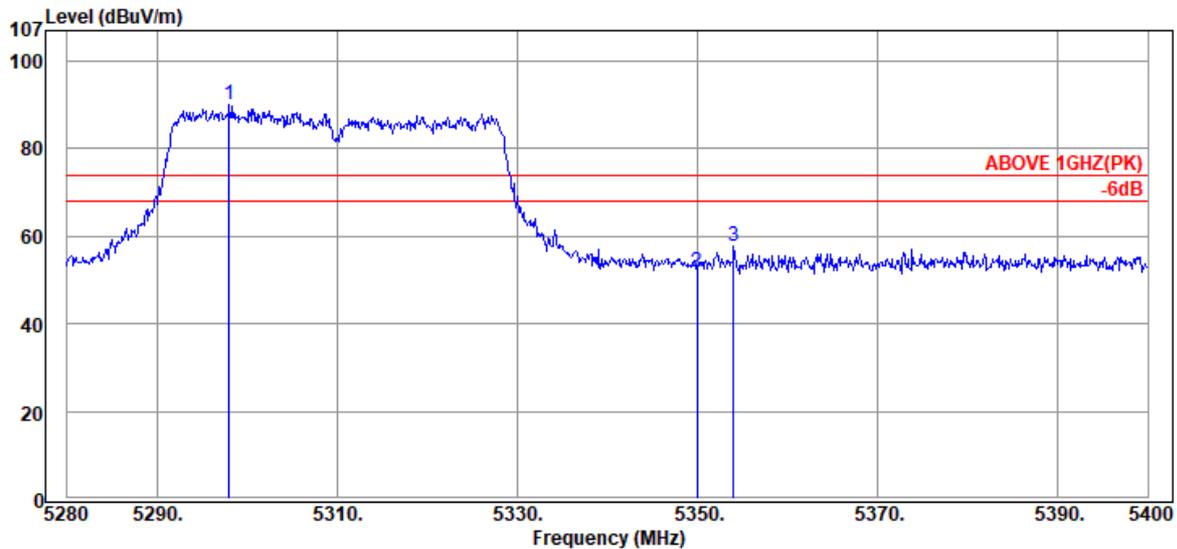

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5298.00	34.50	8.81	46.78	90.09	---	---	Peak
	5349.96	34.50	8.84	8.50	51.84	74.00	22.16	Peak
	5354.04	34.50	8.84	14.57	57.91	74.00	16.09	Peak

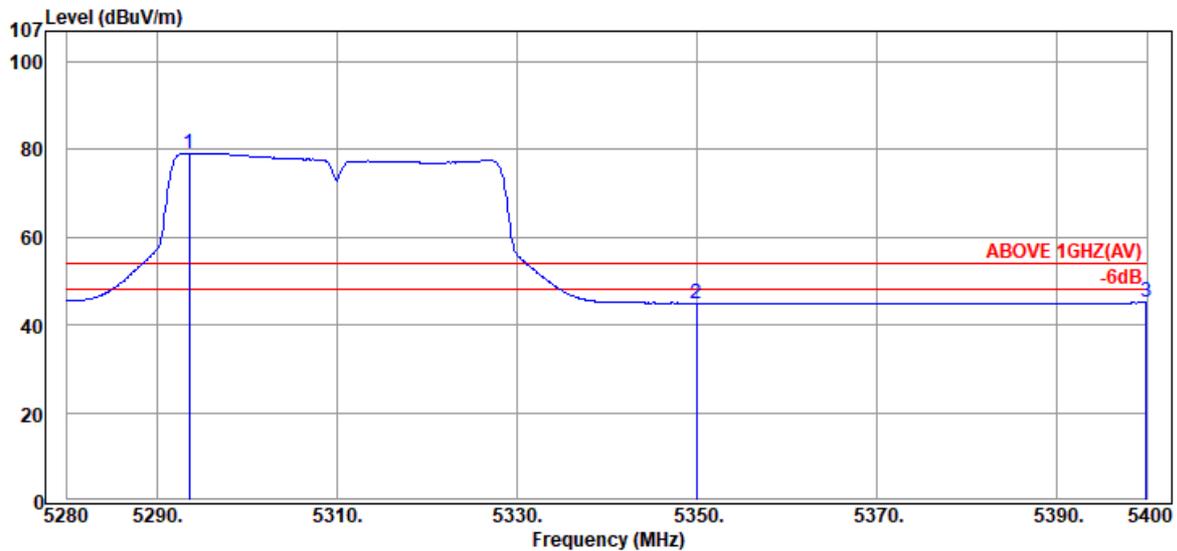


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5293.56	34.49	8.81	35.88	79.18	---	---	Average
	5349.96	34.50	8.84	1.65	44.99	54.00	9.01	Average
	5399.88	34.50	8.87	1.72	45.09	54.00	8.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-2A
		Frequency	TX 5310MHz

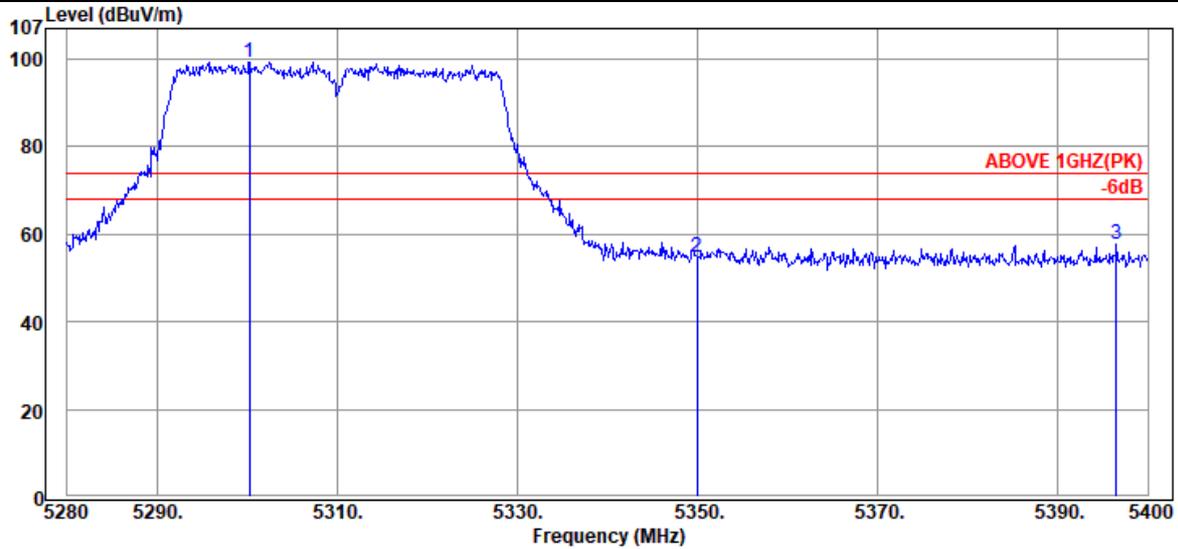

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5300.28	34.50	8.81	56.07	99.38	---	---	Peak
	5349.96	34.50	8.84	11.63	54.97	74.00	19.03	Peak
	5396.52	34.50	8.87	14.20	57.57	74.00	16.43	Peak

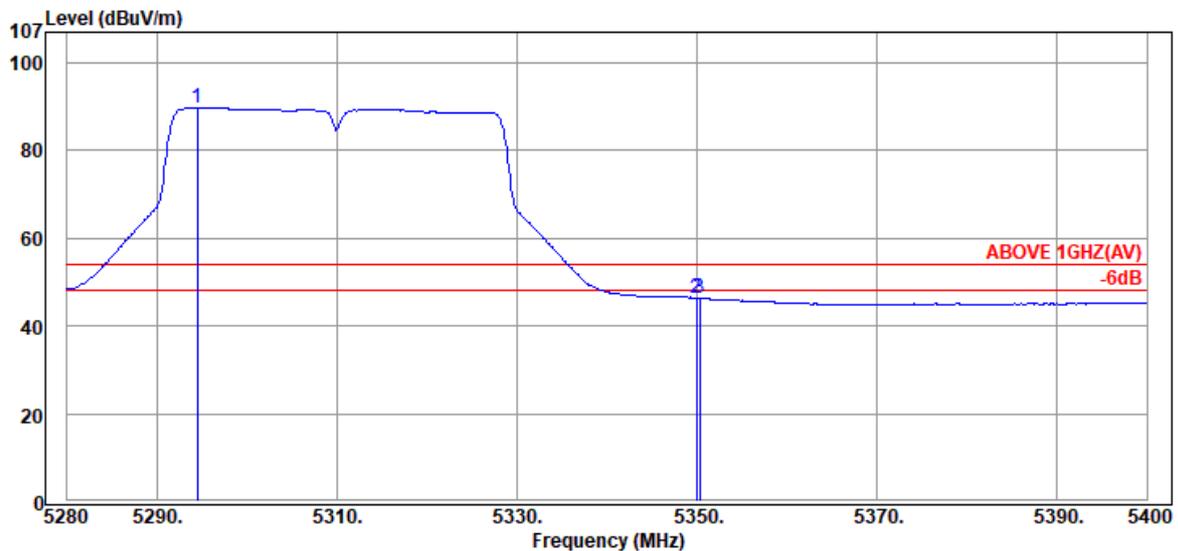


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5294.52	34.49	8.81	46.37	89.67	---	---	Average
	5349.96	34.50	8.84	3.01	46.35	54.00	7.65	Average
	5350.32	34.50	8.84	3.03	46.37	54.00	7.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-2C
		Frequency	TX 5510MHz

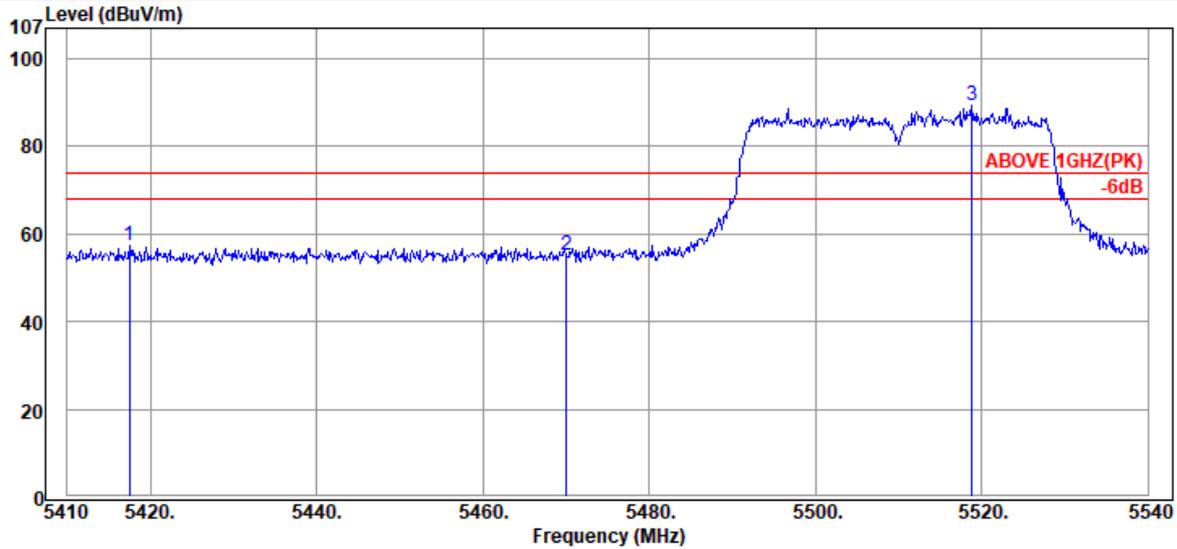

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.54	34.50	8.88	14.08	57.46	74.00	16.54	Peak
5470.06	34.50	8.91	11.88	55.29	74.00	18.71	Peak
@ 5518.81	34.54	8.93	45.94	89.41	---	---	Peak

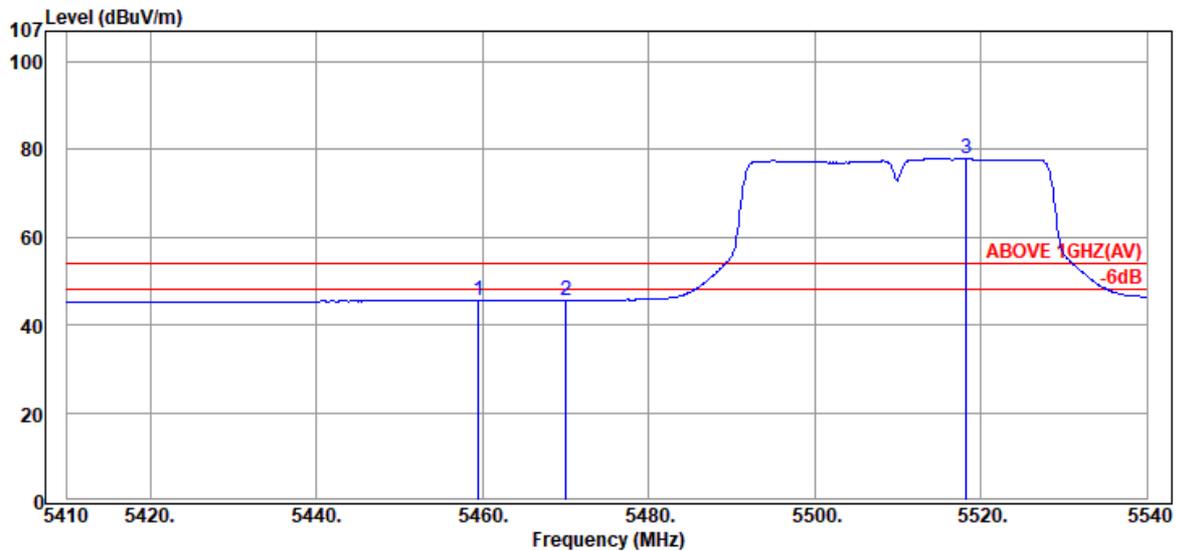


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.53	34.50	8.90	2.21	45.61	54.00	8.39	Average
5470.06	34.50	8.91	2.27	45.68	54.00	8.32	Average
@ 5518.29	34.54	8.93	34.42	77.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-2C
		Frequency	TX 5510MHz

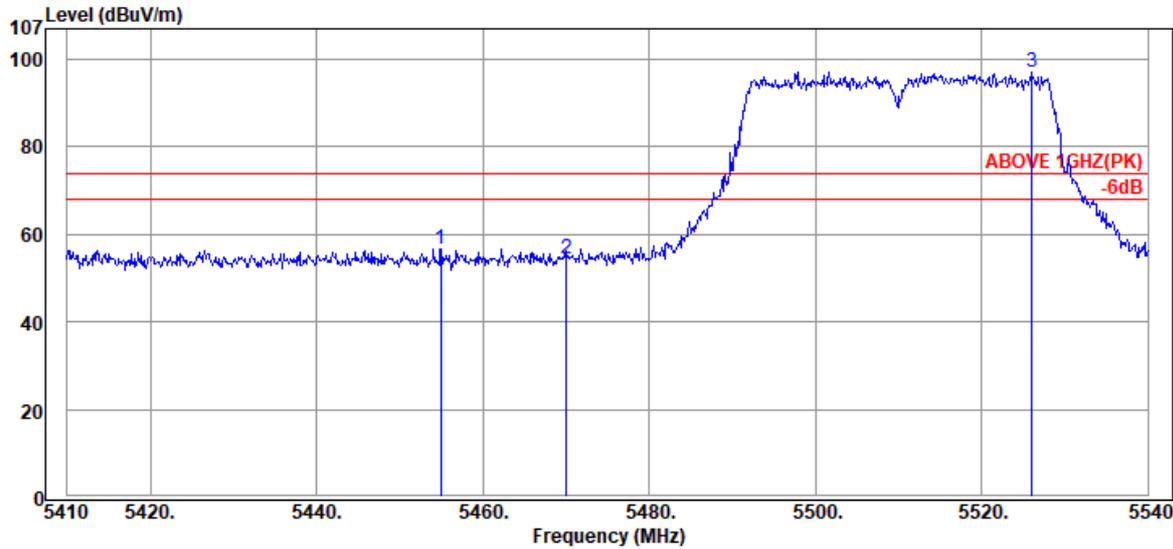

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.98	34.50	8.90	13.12	56.52	74.00	17.48	Peak
5470.06	34.50	8.91	11.06	54.47	74.00	19.53	Peak
@ 5526.09	34.55	8.94	53.68	97.17	---	---	Peak

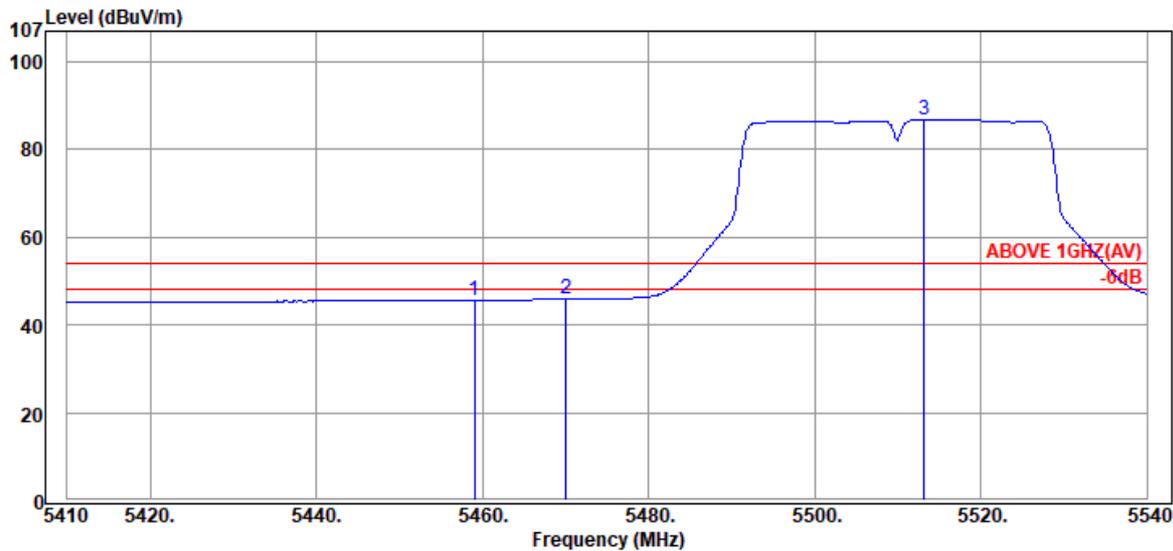


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.01	34.50	8.90	2.29	45.69	54.00	8.31	Average
5470.06	34.50	8.91	2.42	45.83	54.00	8.17	Average
@ 5513.22	34.53	8.93	43.40	86.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-2C
		Frequency	TX 5670MHz

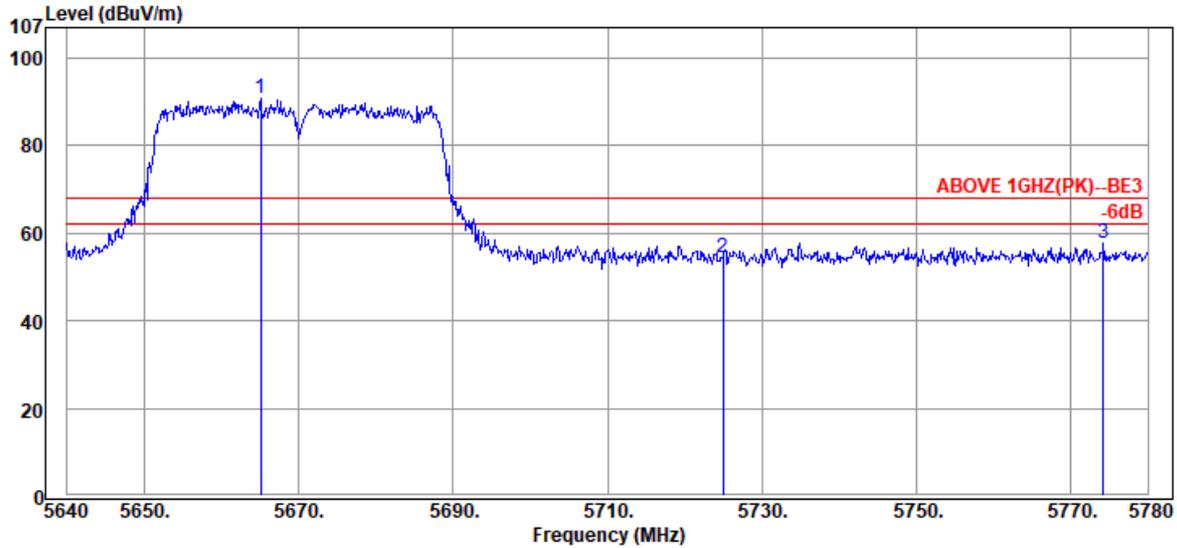

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
@	5665.06	34.54	9.01	47.17	90.72	---	---	Peak
	5724.98	34.40	9.04	10.96	54.40	68.20	13.80	Peak
	5774.26	34.30	9.07	14.35	57.72	68.20	10.48	Peak

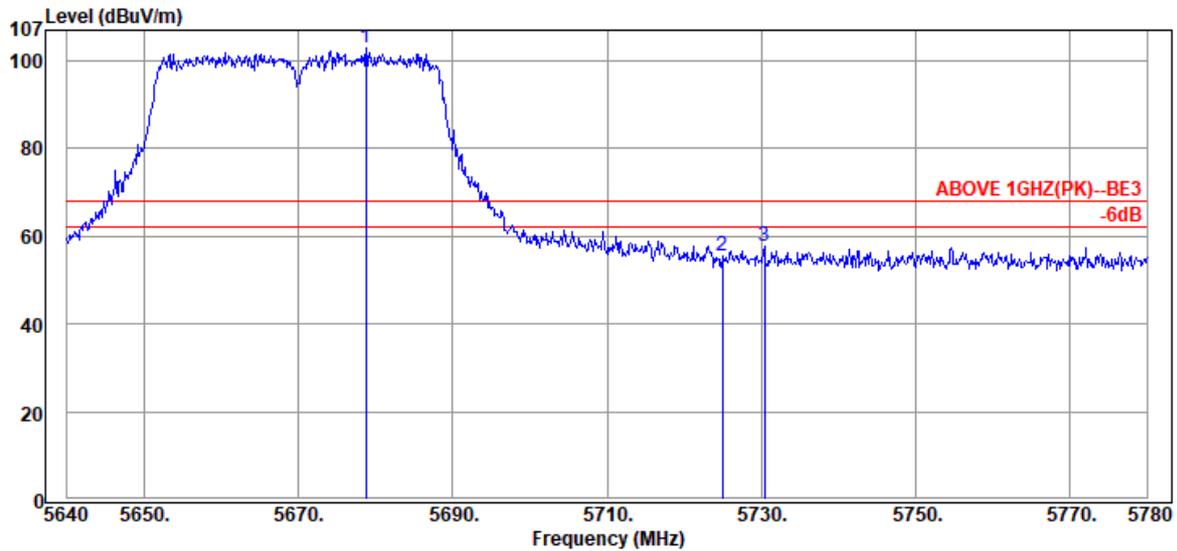


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
@	5678.78	34.48	9.02	59.28	102.78	---	---	Peak
	5724.98	34.40	9.04	12.10	55.54	68.20	12.66	Peak
	5730.44	34.40	9.04	14.12	57.56	68.20	10.64	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-2C
		Frequency	TX 5710MHz

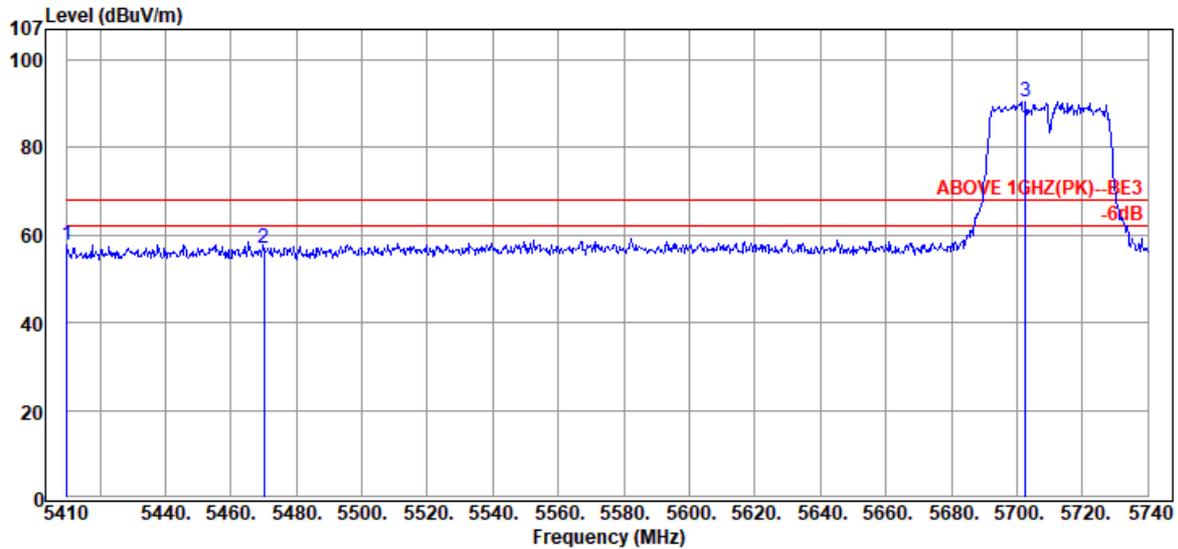

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5410.00	34.50	8.87	14.52	57.89	68.20	10.31	Peak
5470.06	34.50	8.91	13.54	56.95	68.20	11.25	Peak
@ 5702.71	34.40	9.03	47.09	90.52	---	---	Peak

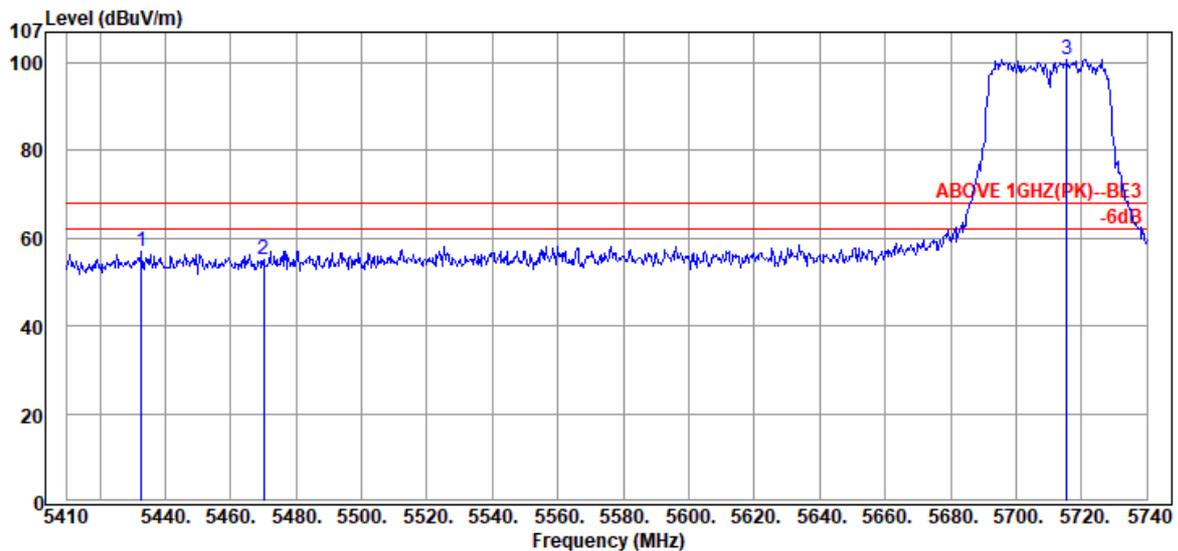


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.77	34.50	8.89	13.63	57.02	68.20	11.18	Peak
5470.06	34.50	8.91	11.84	55.25	68.20	12.95	Peak
@ 5715.58	34.40	9.04	57.48	100.92	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	UNII Band	NII-2C
		Frequency	TX 5710MHz

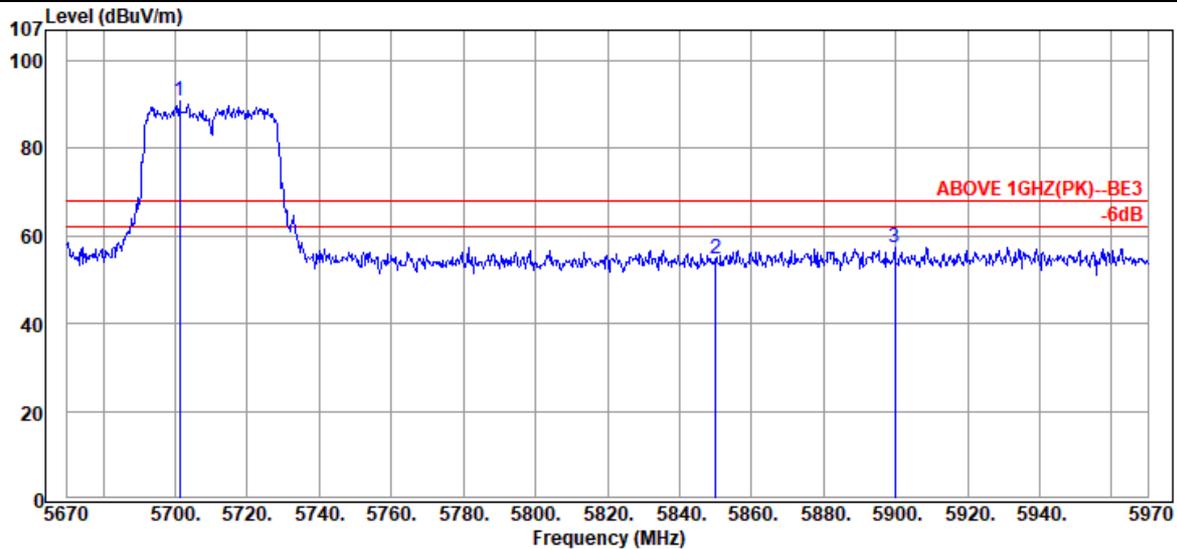

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.20	34.40	9.03	47.52	90.95	---	---	Peak
	5850.00	34.40	9.11	11.38	54.89	68.20	13.31	Peak
	5899.80	34.50	9.13	13.62	57.25	68.20	10.95	Peak

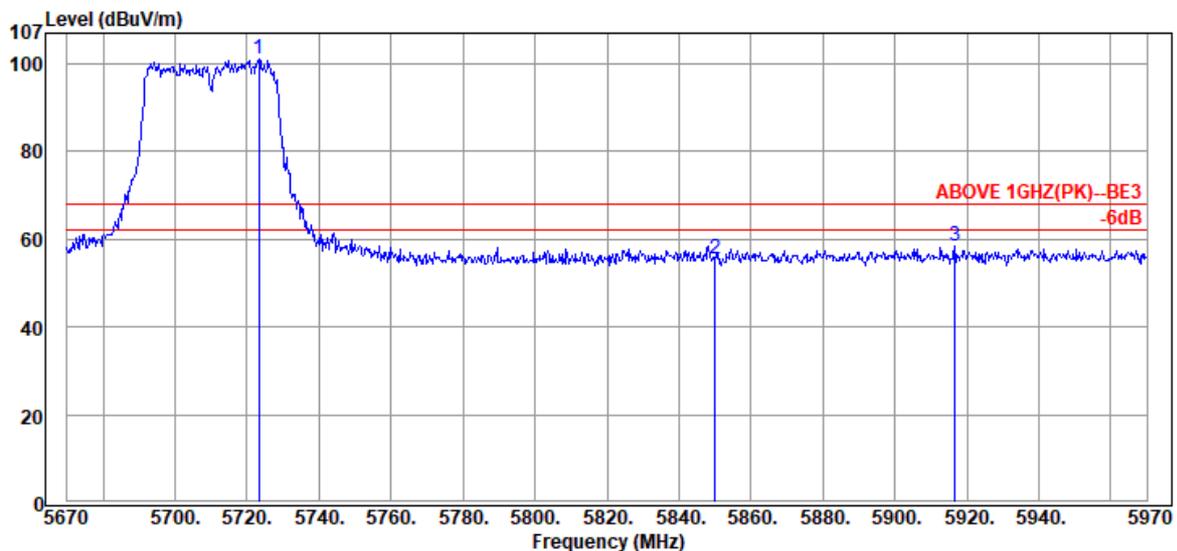


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5723.40	34.40	9.04	57.66	101.10	---	---	Peak
	5850.00	34.40	9.11	12.08	55.59	68.20	12.61	Peak
	5916.60	34.60	9.14	14.64	58.38	68.20	9.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	UNII Band	NII-I
		Frequency	TX 5210MHz

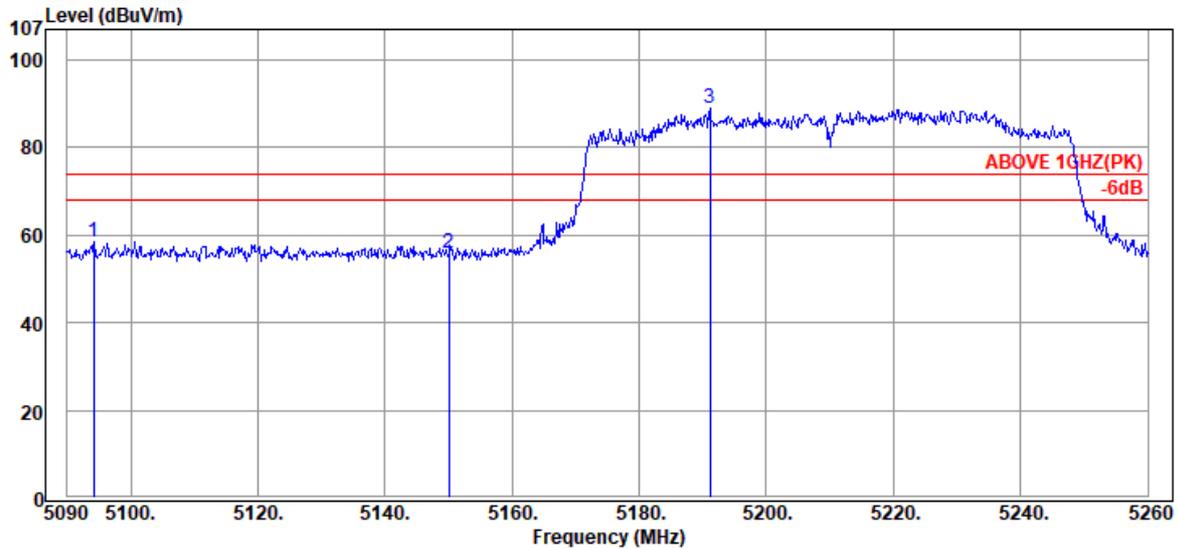

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5094.25	33.80	8.70	15.90	58.40	74.00	15.60	Peak
5150.01	33.90	8.73	13.13	55.76	74.00	18.24	Peak
@ 5191.15	34.06	8.75	46.04	88.85	---	---	Peak

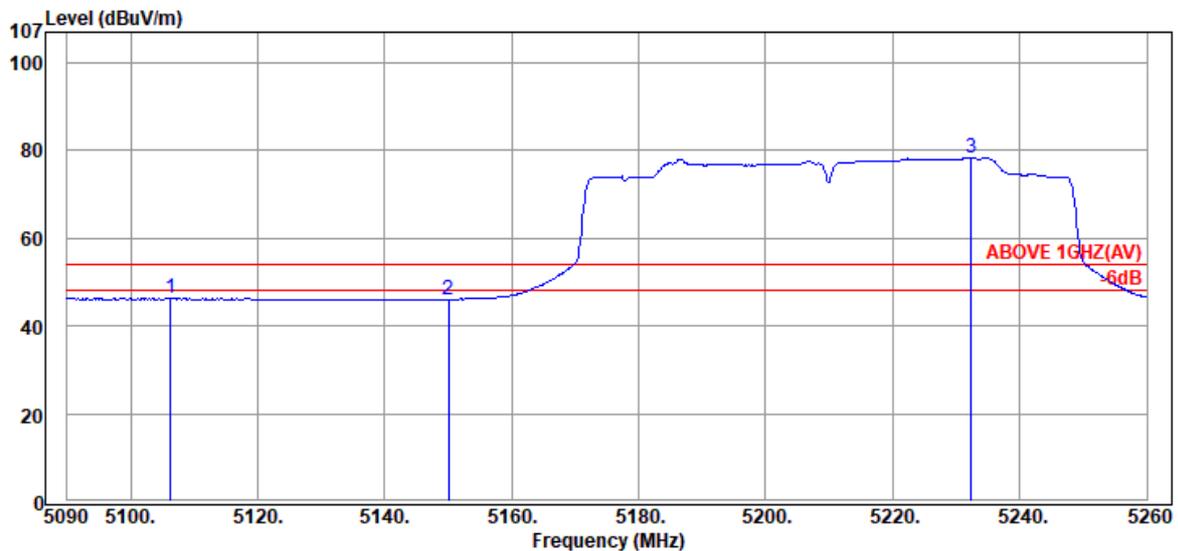


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.32	33.81	8.70	3.69	46.20	54.00	7.80	Average
5150.01	33.90	8.73	3.49	46.12	54.00	7.88	Average
@ 5232.29	34.29	8.77	35.25	78.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	UNII Band	NII-I
		Frequency	TX 5210MHz

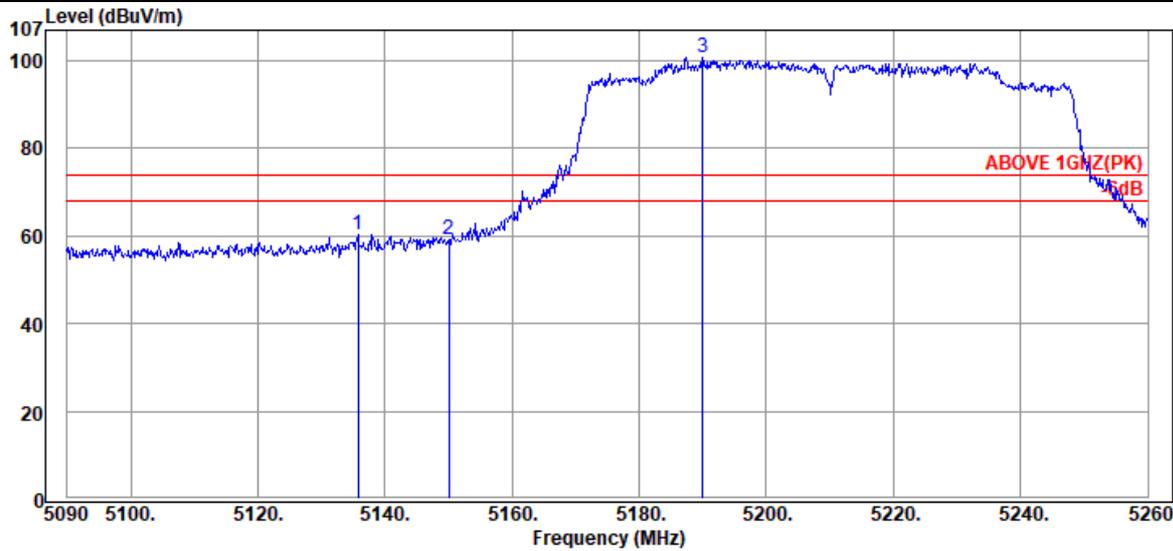

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.73	33.87	8.72	17.59	60.18	74.00	13.82	Peak
5150.01	33.90	8.73	16.69	59.32	74.00	14.68	Peak
@ 5189.96	34.06	8.75	57.90	100.71	---	---	Peak

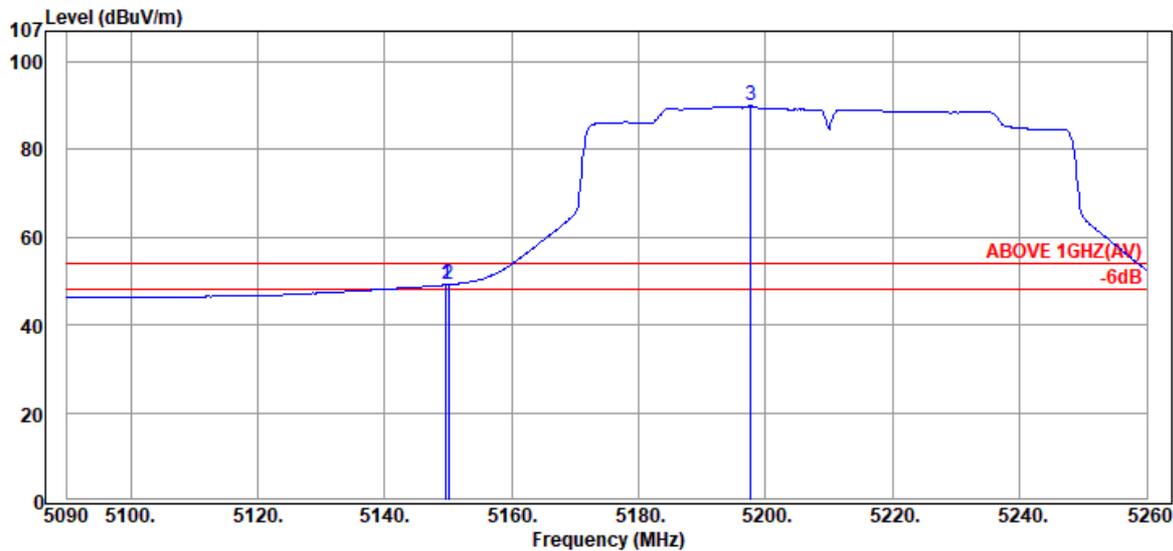


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	6.51	49.14	54.00	4.86	Average
5150.01	33.90	8.73	6.60	49.23	54.00	4.77	Average
@ 5197.61	34.09	8.75	47.18	90.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	UNII Band	NII-2A
		Frequency	TX 5290MHz

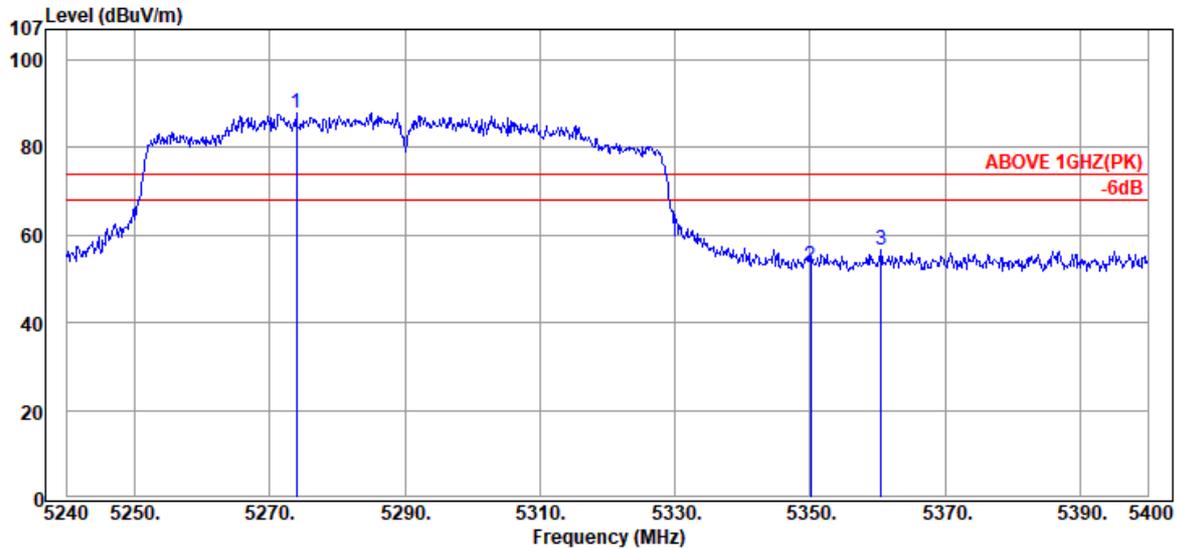

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5273.92	34.45	8.80	44.62	87.87	---	---	Peak
	5350.08	34.50	8.84	9.52	52.86	74.00	21.14	Peak
	5360.48	34.50	8.85	13.34	56.69	74.00	17.31	Peak

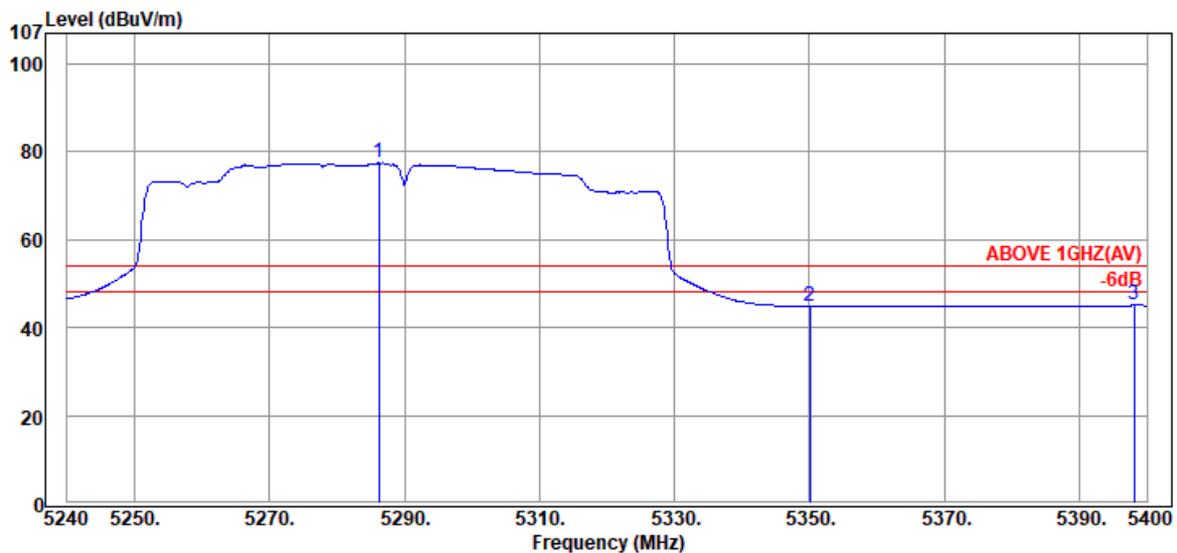


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5286.24	34.47	8.80	34.28	77.55	---	---	Average
	5350.08	34.50	8.84	1.64	44.98	54.00	9.02	Average
	5398.08	34.50	8.87	1.71	45.08	54.00	8.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	UNII Band	NII-2A
		Frequency	TX 5290MHz

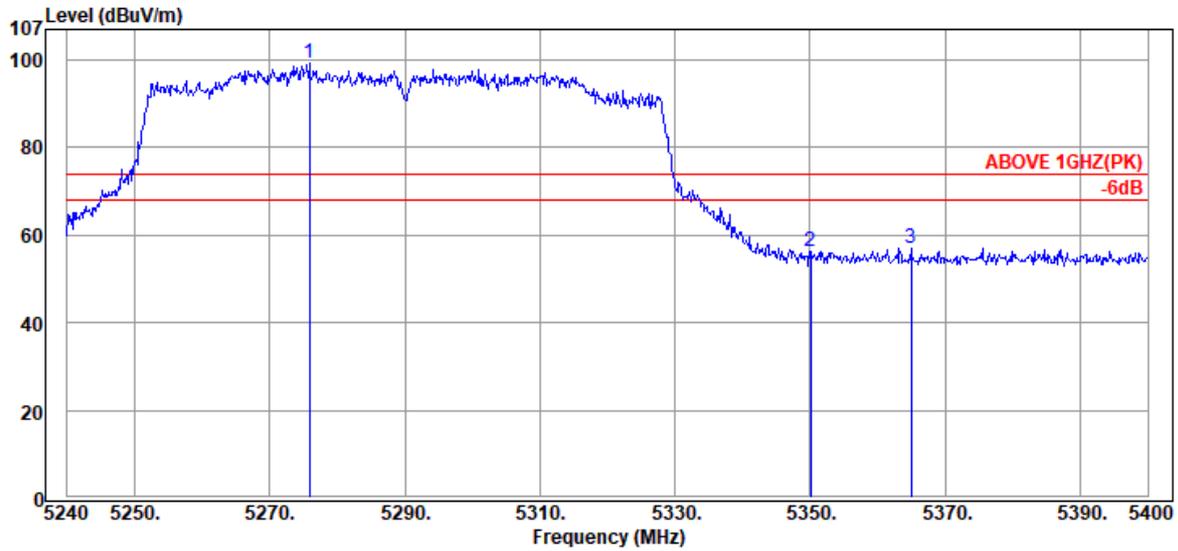

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5275.84	34.45	8.80	55.87	99.12	---	---	Peak
	5350.08	34.50	8.84	13.05	56.39	74.00	17.61	Peak
	5364.96	34.50	8.85	13.59	56.94	74.00	17.06	Peak

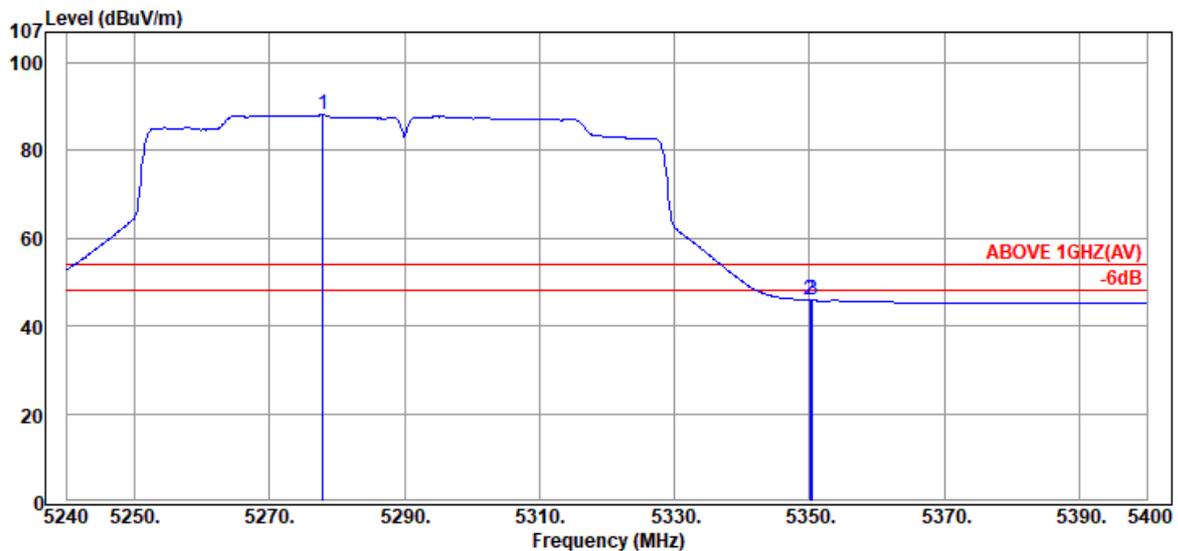


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5277.92	34.46	8.80	45.08	88.34	---	---	Average
	5350.08	34.50	8.84	2.60	45.94	54.00	8.06	Average
	5350.40	34.50	8.84	2.61	45.95	54.00	8.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	UNII Band	NII-2C
		Frequency	TX 5530MHz

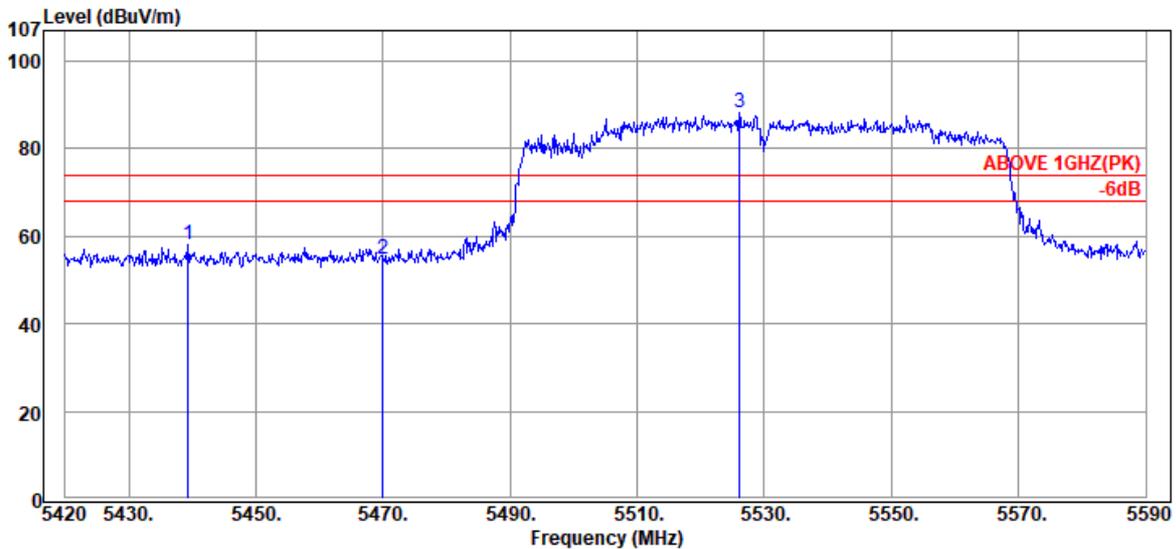

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.38	34.50	8.89	14.83	58.22	74.00	15.78	Peak
5469.98	34.50	8.91	11.54	54.95	74.00	19.05	Peak
@ 5526.08	34.55	8.94	44.60	88.09	---	---	Peak

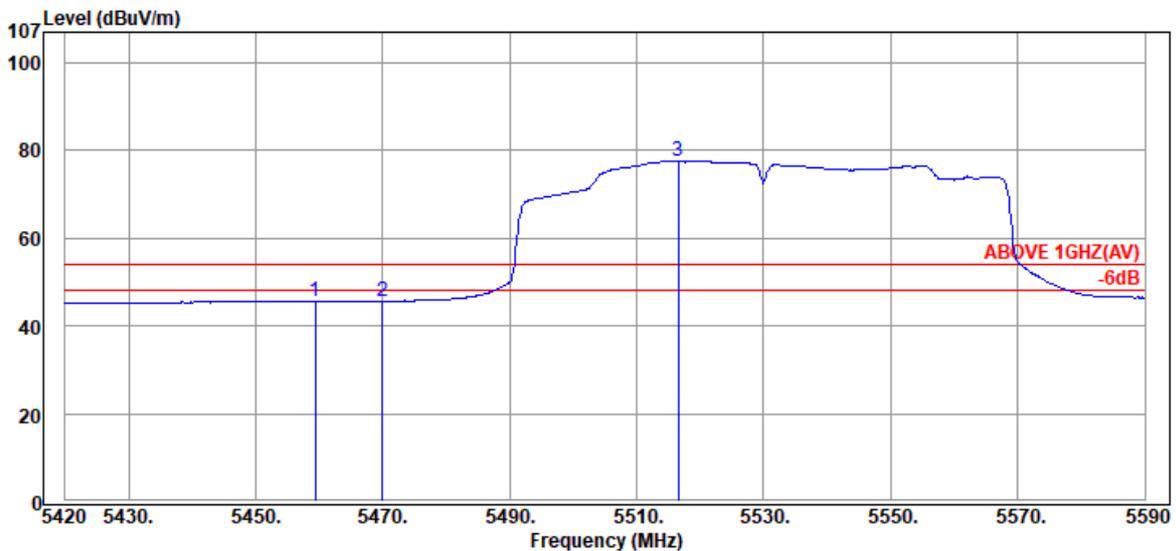


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.44	34.50	8.90	2.24	45.64	54.00	8.36	Average
5469.98	34.50	8.91	2.29	45.70	54.00	8.30	Average
@ 5516.56	34.53	8.93	34.19	77.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	UNII Band	NII-2C
		Frequency	TX 5530MHz

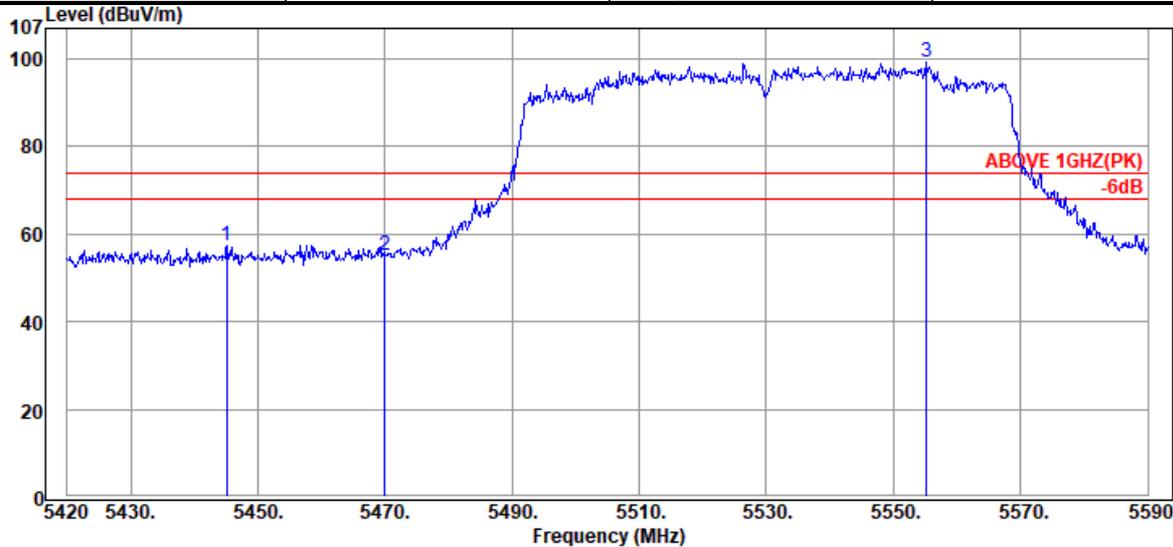

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.16	34.50	8.89	14.08	57.47	74.00	16.53	Peak
5469.98	34.50	8.91	11.62	55.03	74.00	18.97	Peak
@ 5555.15	34.61	8.95	55.56	99.12	---	---	Peak

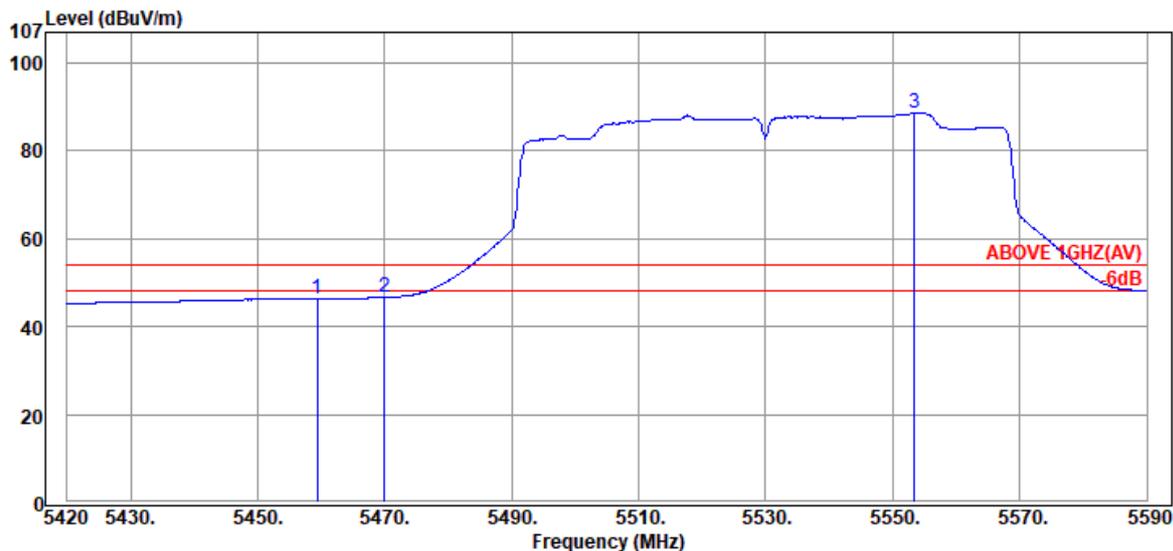


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.44	34.50	8.90	2.97	46.37	54.00	7.63	Average
5469.98	34.50	8.91	3.23	46.64	54.00	7.36	Average
@ 5553.45	34.61	8.95	45.13	88.69	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	UNII Band	NII-2C
		Frequency	TX 5690MHz

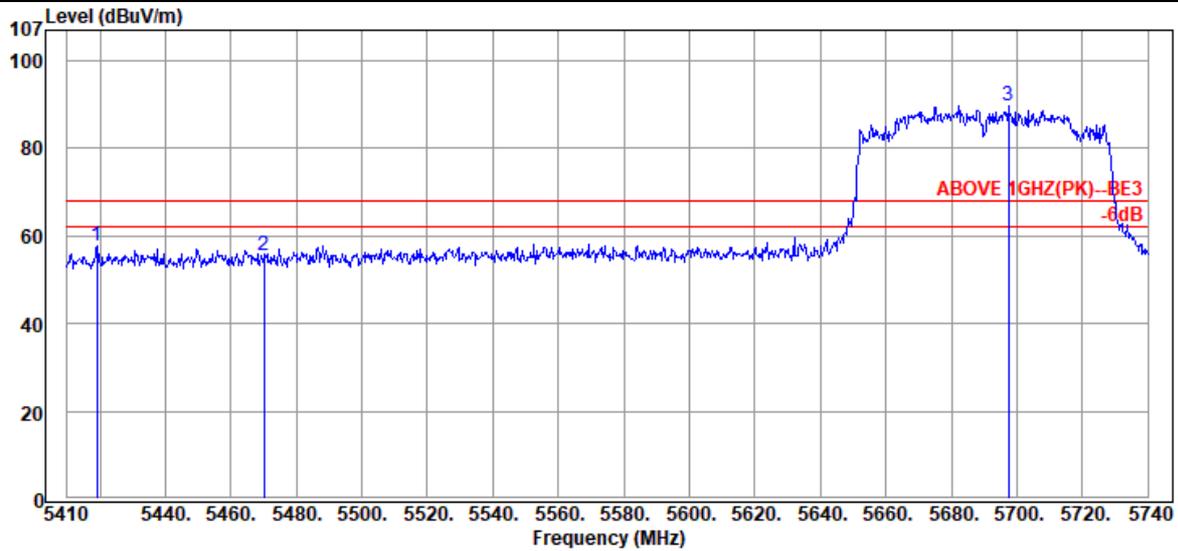

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.24	34.50	8.88	14.23	57.61	68.20	10.59	Peak
5470.06	34.50	8.91	12.25	55.66	68.20	12.54	Peak
@ 5697.43	34.41	9.03	46.22	89.66	---	---	Peak

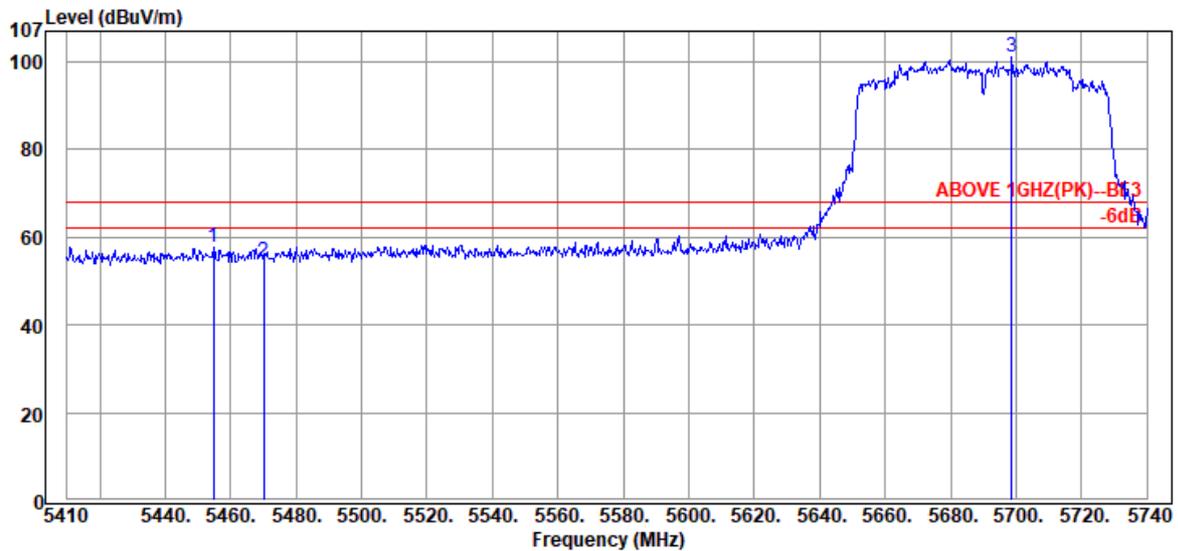


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.88	34.50	8.90	14.32	57.72	68.20	10.48	Peak
5470.06	34.50	8.91	10.89	54.30	68.20	13.90	Peak
@ 5698.75	34.41	9.03	57.72	101.16	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	UNII Band	NII-2C
		Frequency	TX 5690MHz

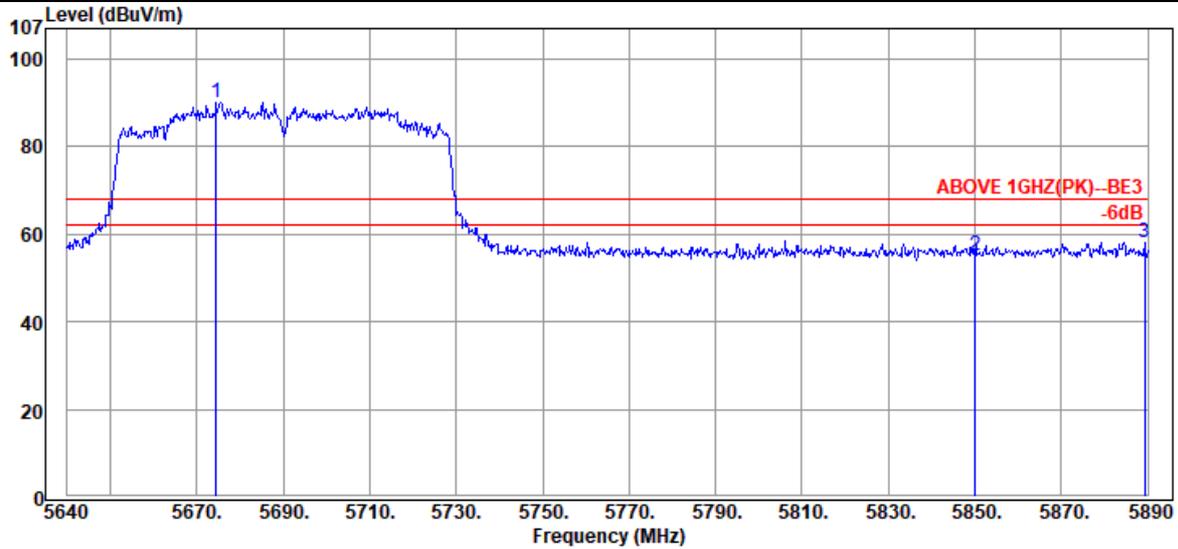

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5674.50	34.50	9.01	46.66	90.17	---	---	Peak
	5850.00	34.40	9.11	11.65	55.16	68.20	13.04	Peak
	5889.25	34.48	9.12	14.60	58.20	68.20	10.00	Peak

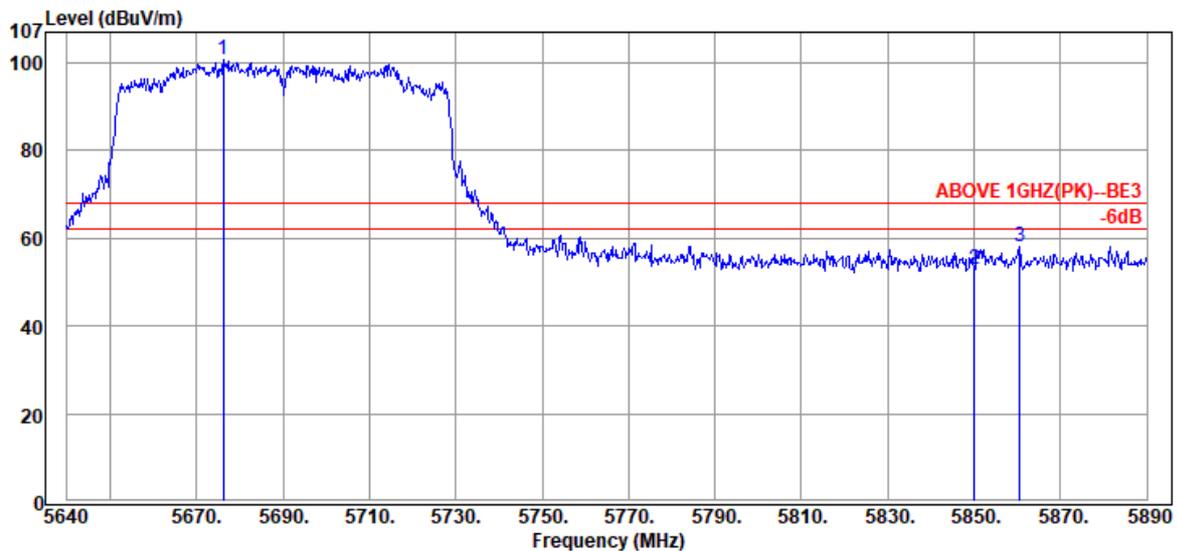


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5676.25	34.49	9.02	57.19	100.70	---	---	Peak
	5850.00	34.40	9.11	9.58	53.09	68.20	15.11	Peak
	5860.50	34.42	9.11	14.55	58.08	68.20	10.12	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	UNII Band	NII-I & NII-2A
		Frequency	TX 5250MHz

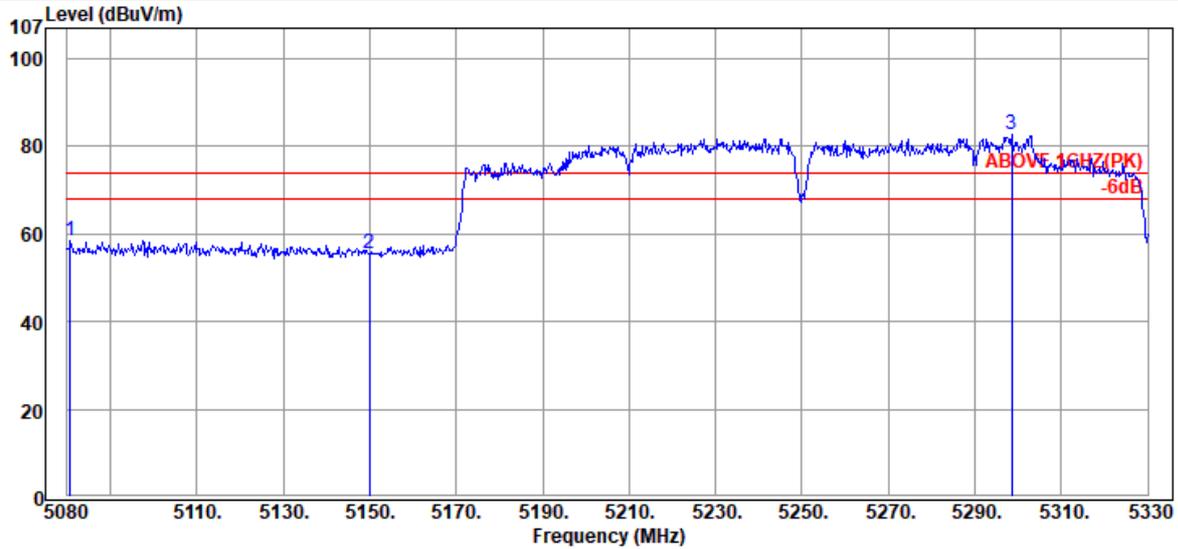

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.75	33.80	8.69	15.84	58.33	74.00	15.67	Peak
5150.00	33.90	8.73	12.90	55.53	74.00	18.47	Peak
@ 5298.50	34.50	8.81	39.49	82.80	---	---	Peak

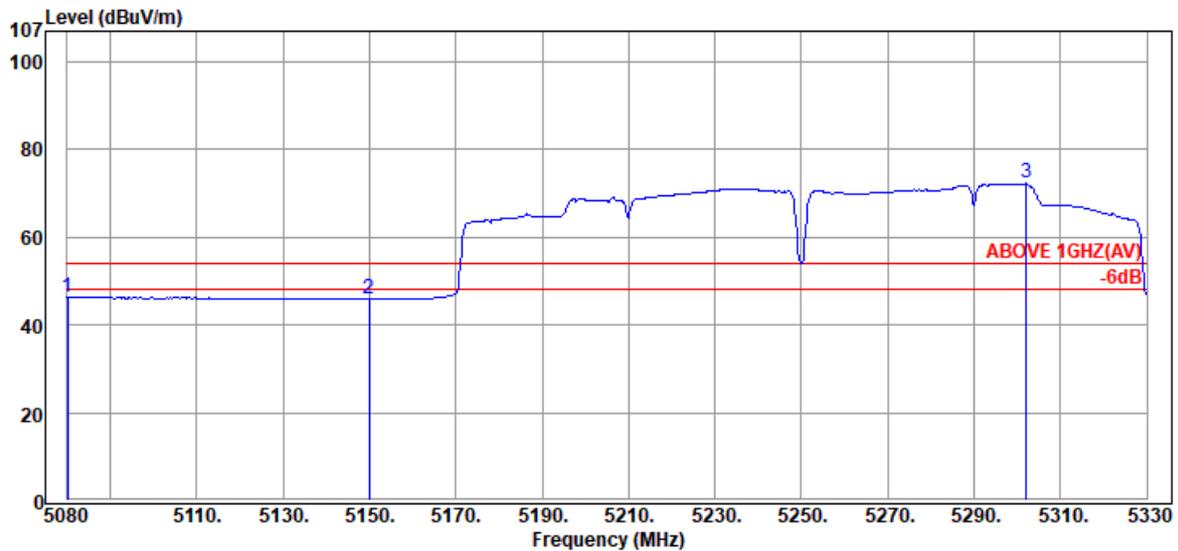


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.25	33.80	8.69	3.74	46.23	54.00	7.77	Average
5150.00	33.90	8.73	3.30	45.93	54.00	8.07	Average
@ 5302.00	34.50	8.81	28.96	72.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	UNII Band	NII- I & NII-2A
		Frequency	TX 5250MHz

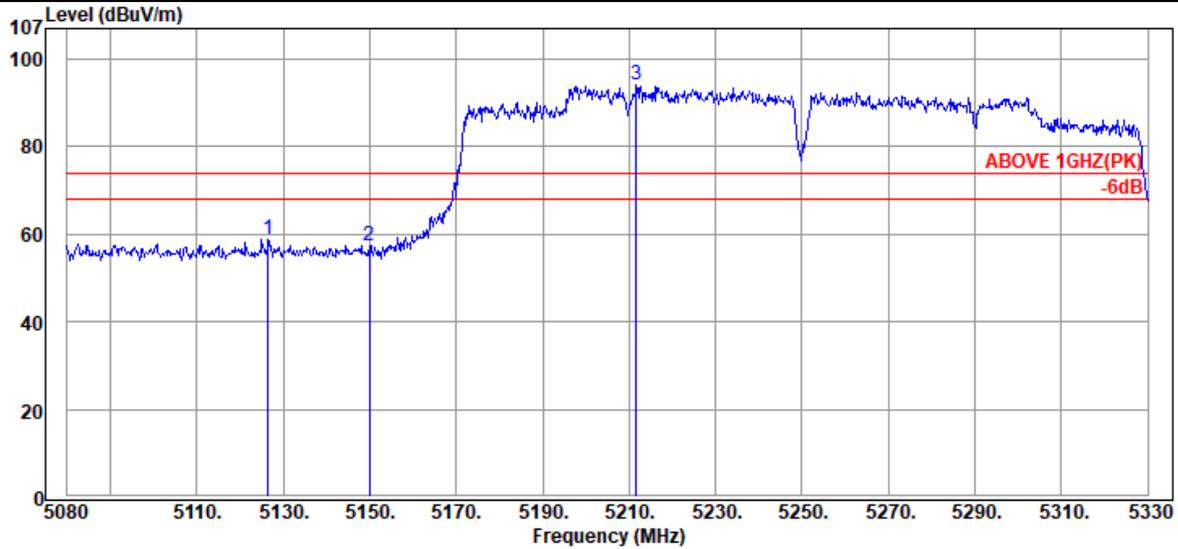

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.50	33.85	8.71	16.25	58.81	74.00	15.19	Peak
5150.00	33.90	8.73	14.78	57.41	74.00	16.59	Peak
@ 5211.75	34.17	8.76	51.19	94.12	---	---	Peak

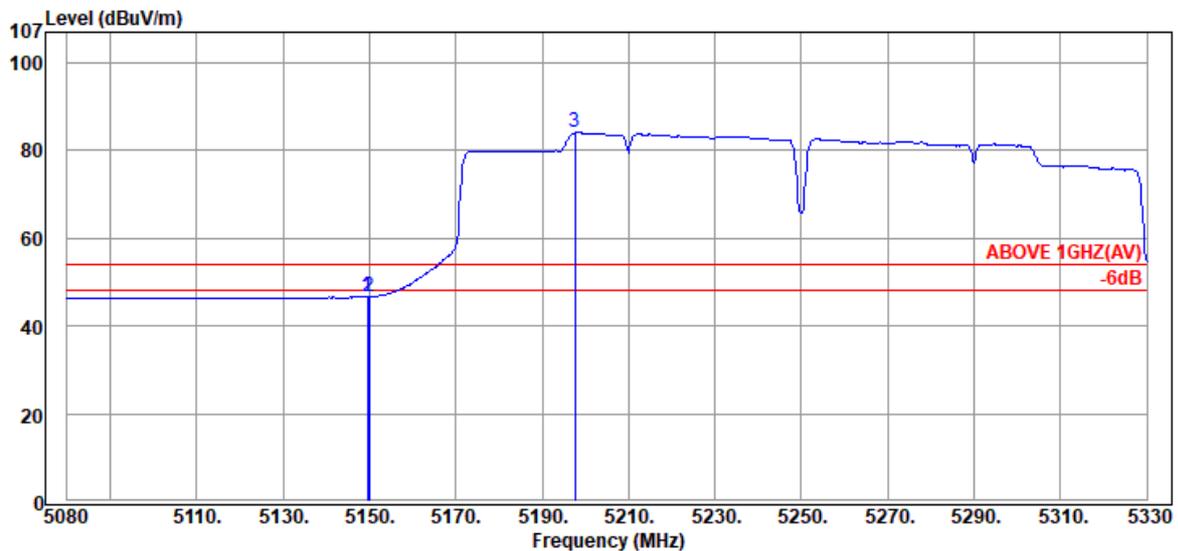


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	33.90	8.73	4.03	46.66	54.00	7.34	Average
5150.00	33.90	8.73	4.06	46.69	54.00	7.31	Average
@ 5197.50	34.09	8.75	41.36	84.20	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	UNII Band	NII-I & NII-2A
		Frequency	TX 5250MHz

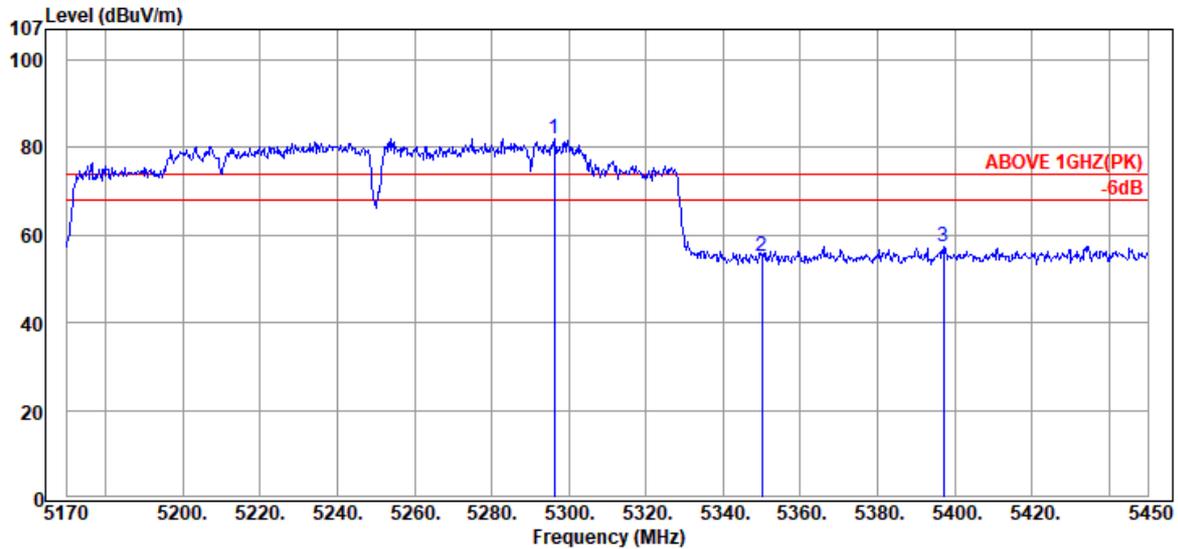

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5296.28	34.49	8.81	38.75	82.05	---	---	Peak
	5350.04	34.50	8.84	11.87	55.21	74.00	18.79	Peak
	5397.08	34.50	8.87	13.98	57.35	74.00	16.65	Peak

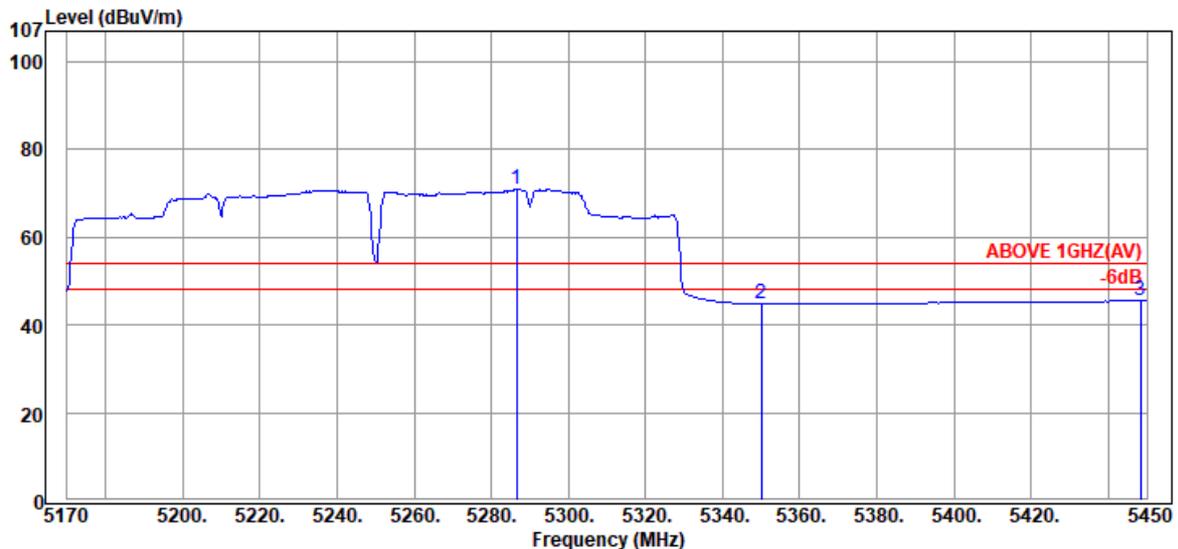


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5286.48	34.47	8.81	27.72	71.00	---	---	Average
	5350.04	34.50	8.84	1.53	44.87	54.00	9.13	Average
	5448.32	34.50	8.89	2.13	45.52	54.00	8.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	UNII Band	NII-I & NII-2A
		Frequency	TX 5250MHz

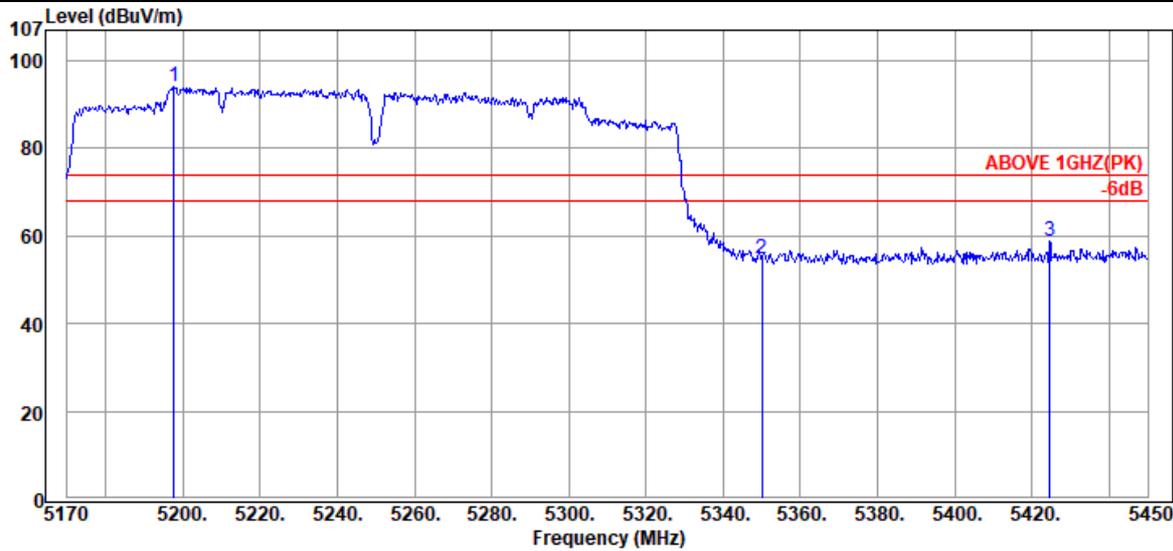

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5197.72	34.09	8.75	51.43	94.27	---	---	Peak
	5350.04	34.50	8.84	11.62	54.96	74.00	19.04	Peak
	5424.52	34.50	8.88	15.35	58.73	74.00	15.27	Peak

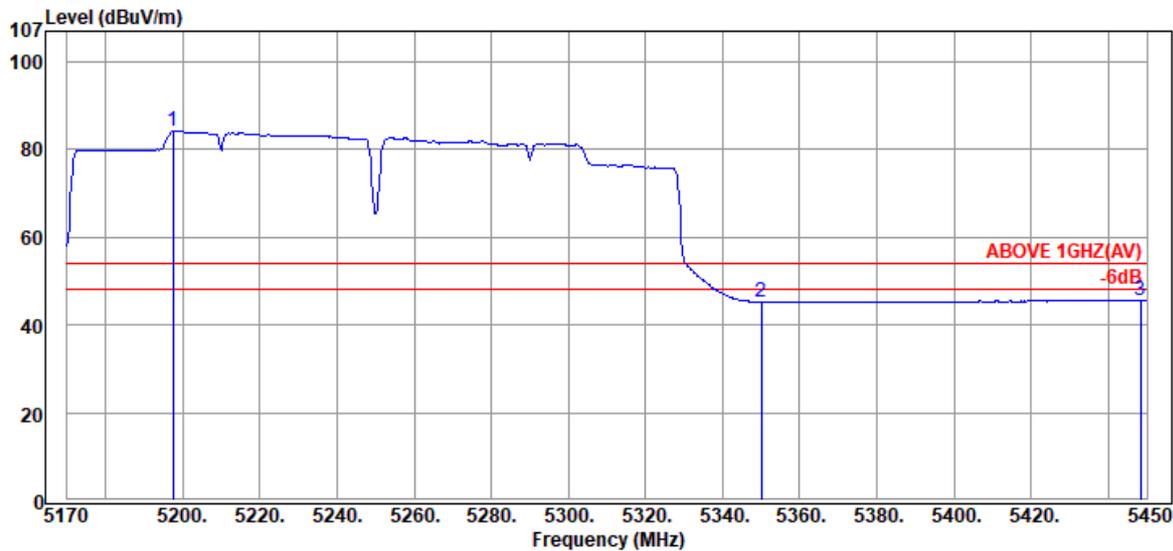


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5197.44	34.09	8.75	41.46	84.30	---	---	Average
	5350.04	34.50	8.84	1.87	45.21	54.00	8.79	Average
	5448.32	34.50	8.89	2.25	45.64	54.00	8.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	UNII Band	NII-2C
		Frequency	TX 5570MHz

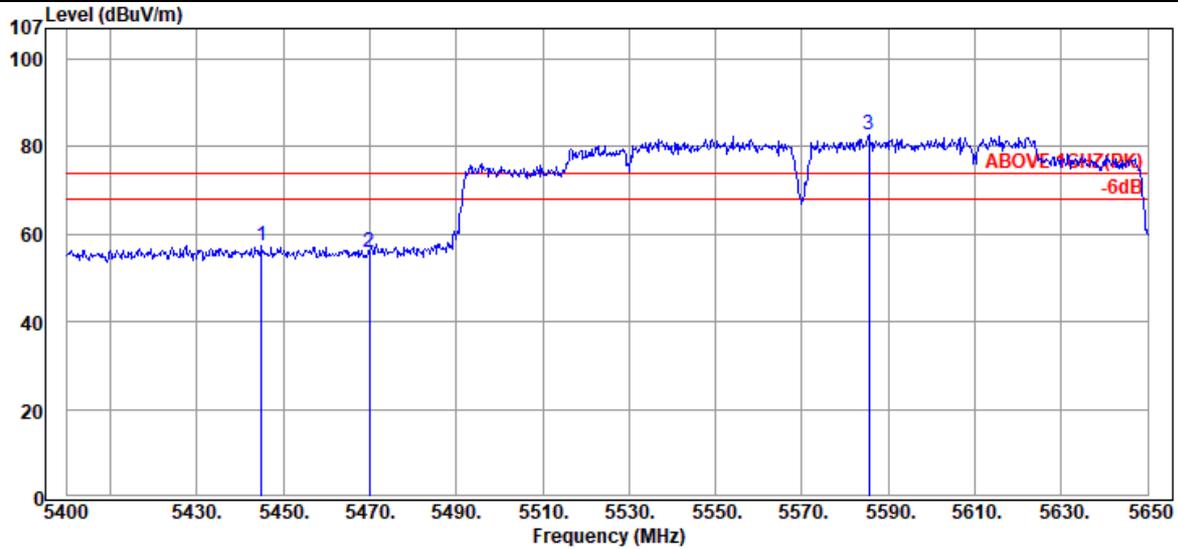

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.00	34.50	8.89	13.89	57.28	74.00	16.72	Peak
5470.00	34.50	8.91	12.57	55.98	74.00	18.02	Peak
@ 5585.50	34.67	8.97	39.27	82.91	---	---	Peak

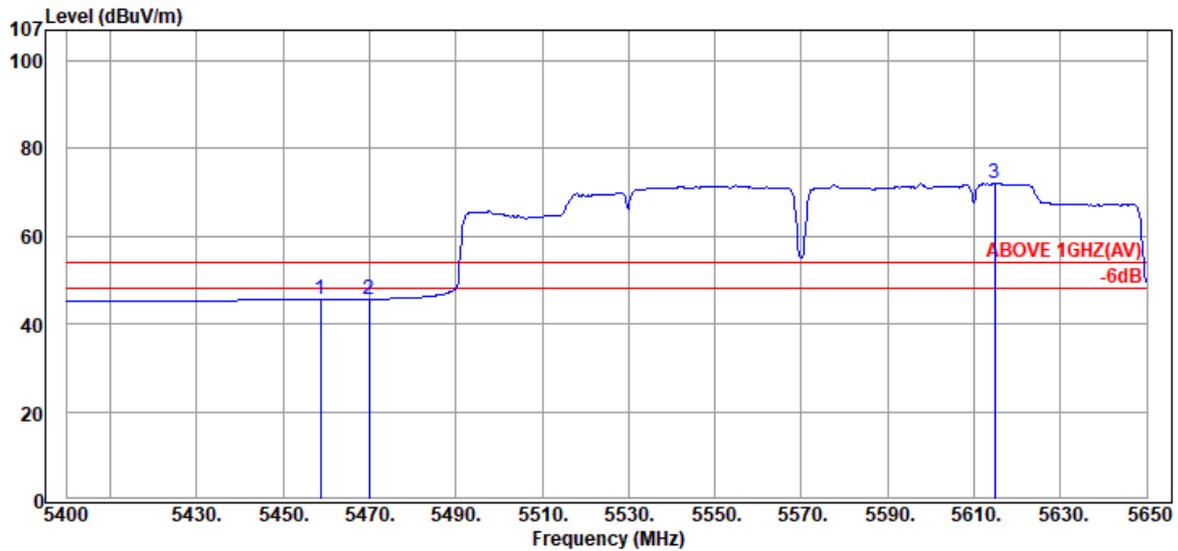


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.75	34.50	8.90	2.20	45.60	54.00	8.40	Average
5470.00	34.50	8.91	2.28	45.69	54.00	8.31	Average
@ 5614.75	34.67	8.98	28.32	71.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	UNII Band	NII-2C
		Frequency	TX 5570MHz

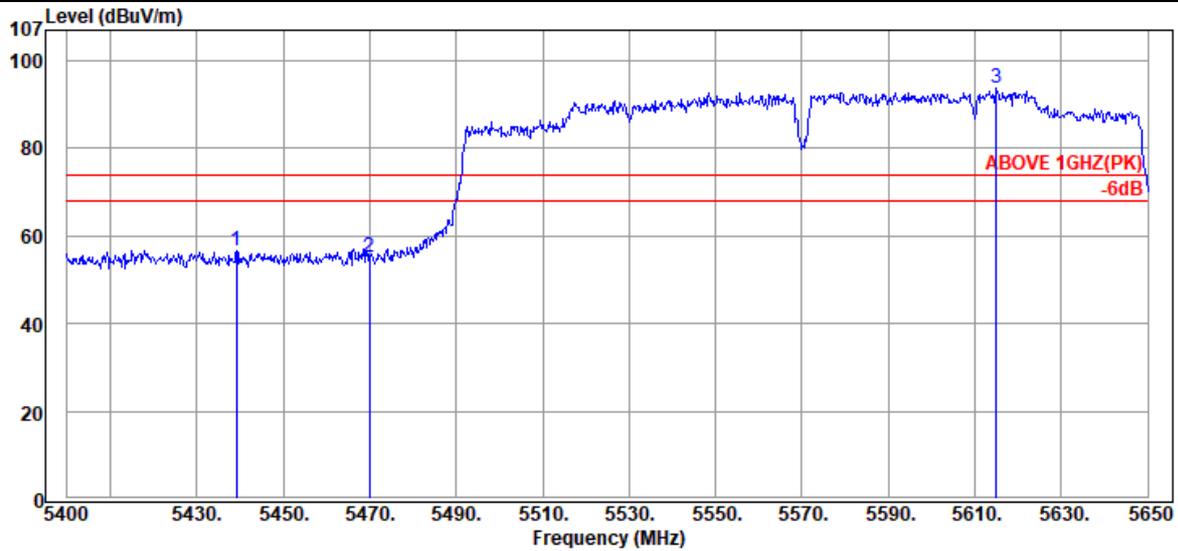

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.25	34.50	8.89	13.12	56.51	74.00	17.49	Peak
5470.00	34.50	8.91	11.71	55.12	74.00	18.88	Peak
@ 5615.00	34.67	8.98	49.93	93.58	---	---	Peak

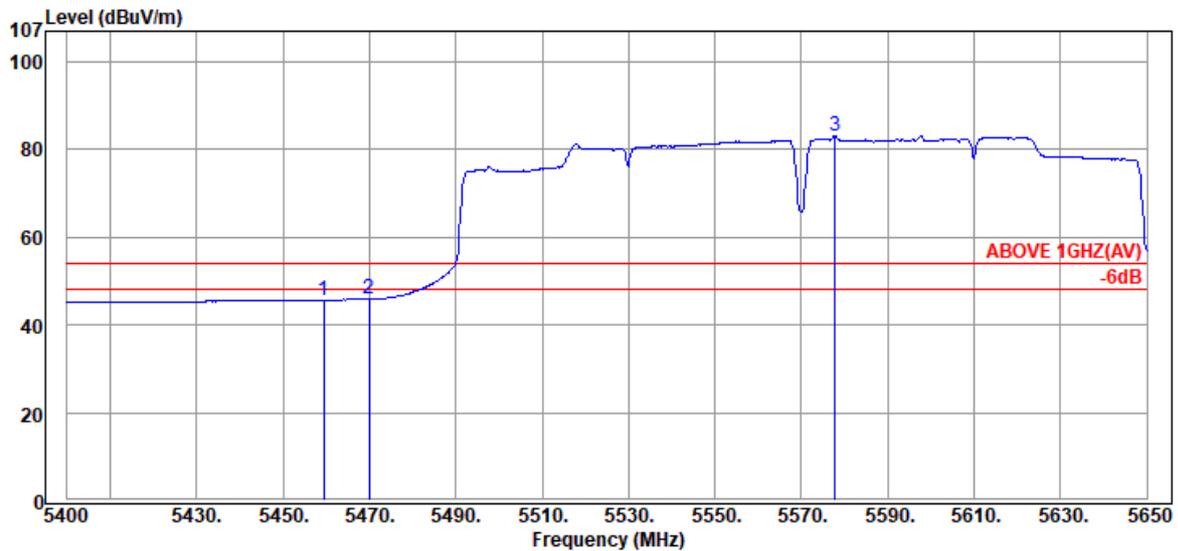


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.50	34.50	8.90	2.34	45.74	54.00	8.26	Average
5470.00	34.50	8.91	2.49	45.90	54.00	8.10	Average
@ 5577.75	34.66	8.96	39.52	83.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	UNII Band	NII-2C
		Frequency	TX 5570MHz

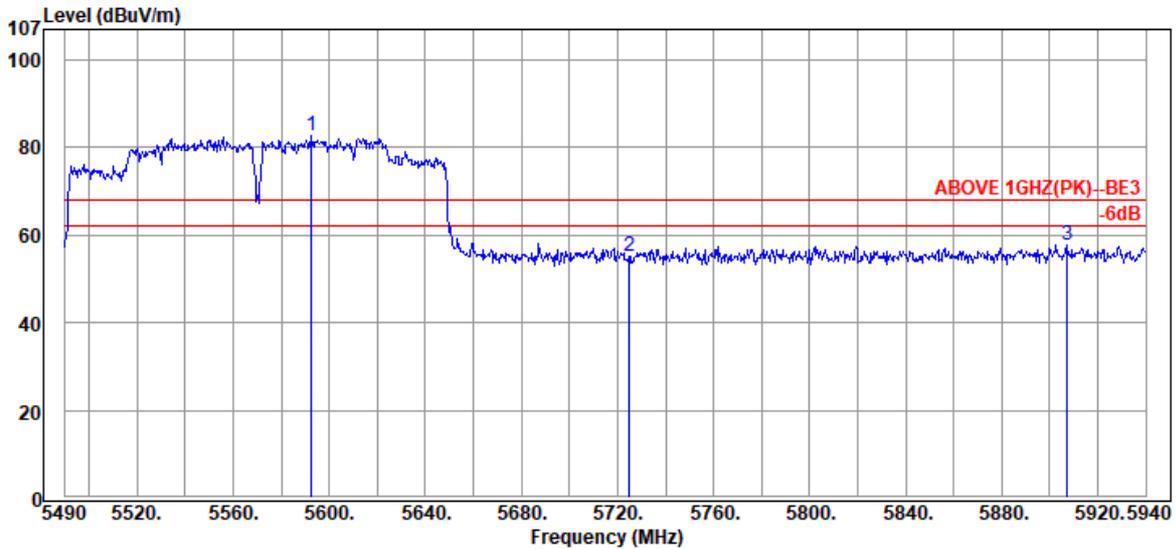

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5592.60	34.69	8.97	38.91	82.57	---	---	Peak
	5724.90	34.40	9.04	11.62	55.06	68.20	13.14	Peak
	5907.15	34.54	9.13	14.21	57.88	68.20	10.32	Peak

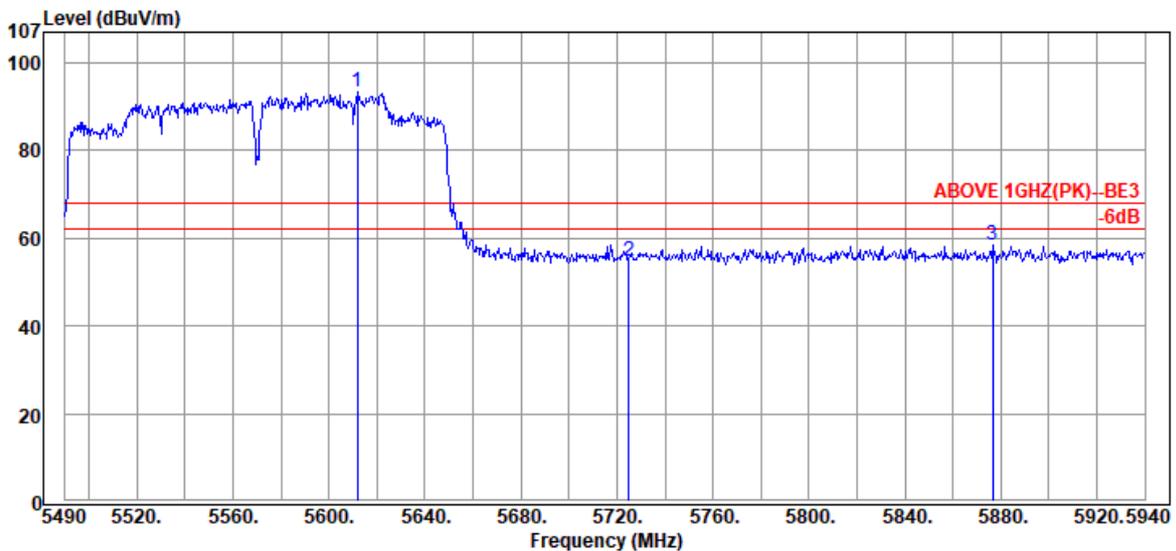


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5611.95	34.68	8.98	49.75	93.41	---	---	Peak
	5724.90	34.40	9.04	11.34	54.78	68.20	13.42	Peak
	5876.55	34.45	9.12	15.06	58.63	68.20	9.57	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-I
		Frequency	TX 5180MHz

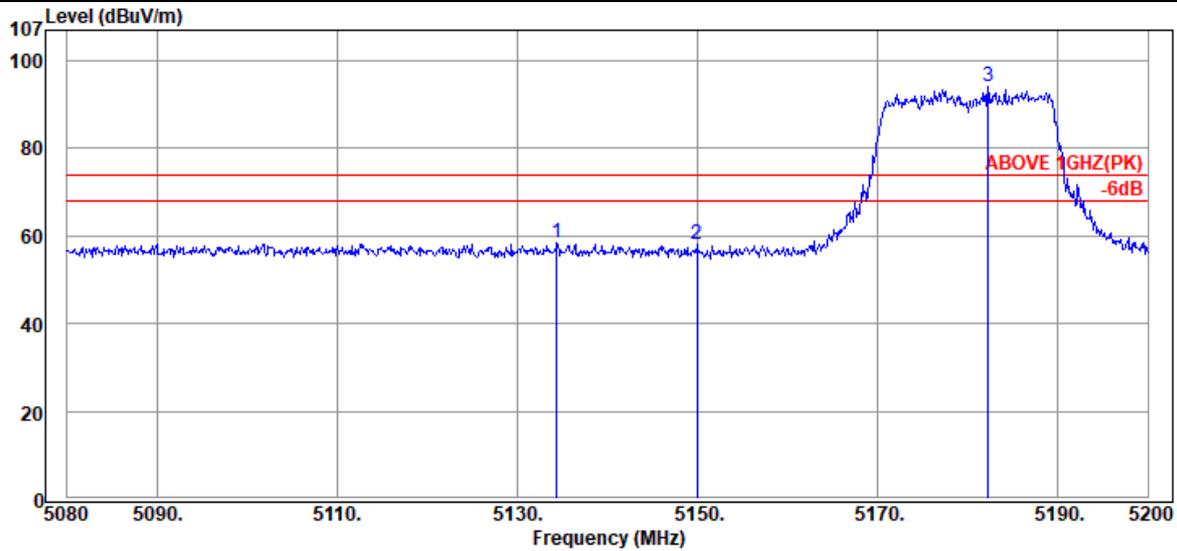

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.36	33.87	8.72	15.78	58.37	74.00	15.63	Peak
5149.96	33.90	8.73	15.48	58.11	74.00	15.89	Peak
@ 5182.24	34.03	8.75	51.27	94.05	---	---	Peak

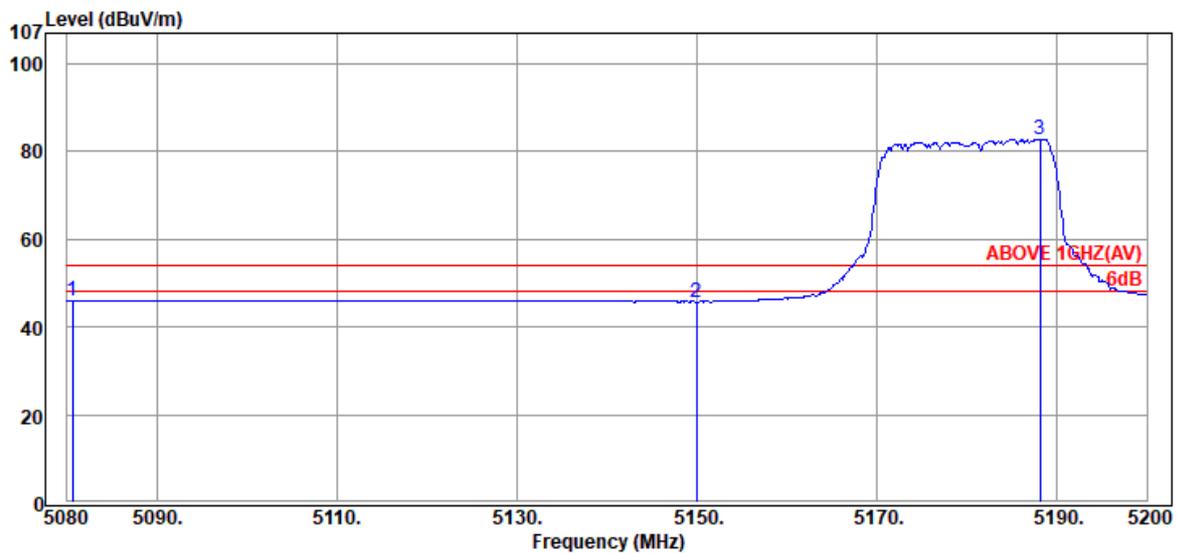


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.60	33.80	8.69	3.60	46.09	54.00	7.91	Average
5149.96	33.90	8.73	3.13	45.76	54.00	8.24	Average
@ 5188.12	34.05	8.75	40.07	82.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-I
		Frequency	TX 5180MHz

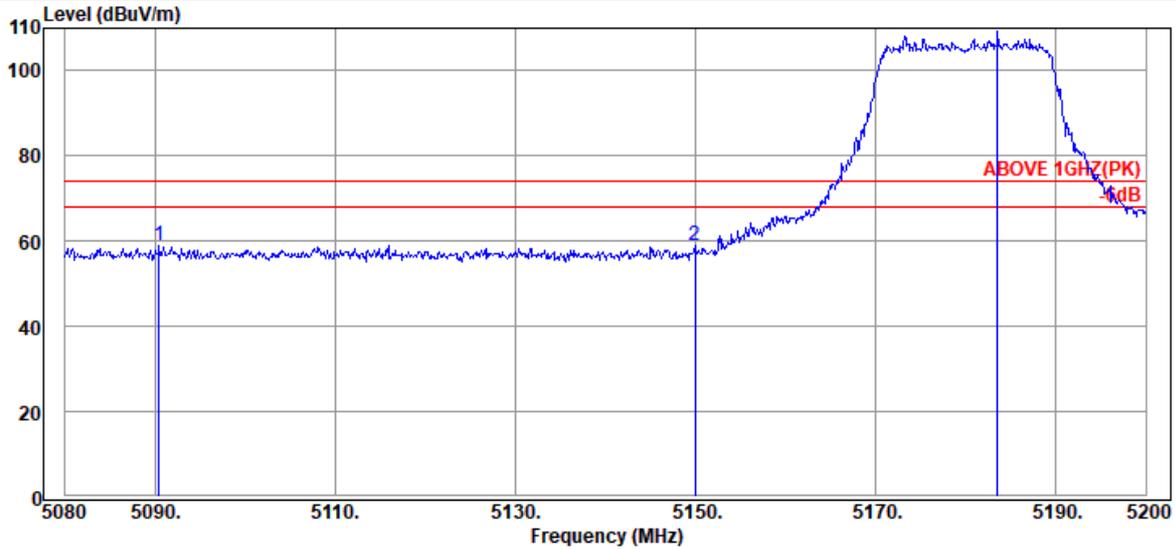

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5090.44	33.80	8.69	16.31	58.80	74.00	15.20	Peak
5149.96	33.90	8.73	16.16	58.79	74.00	15.21	Peak
@ 5183.56	34.03	8.75	66.40	109.18	---	---	Peak

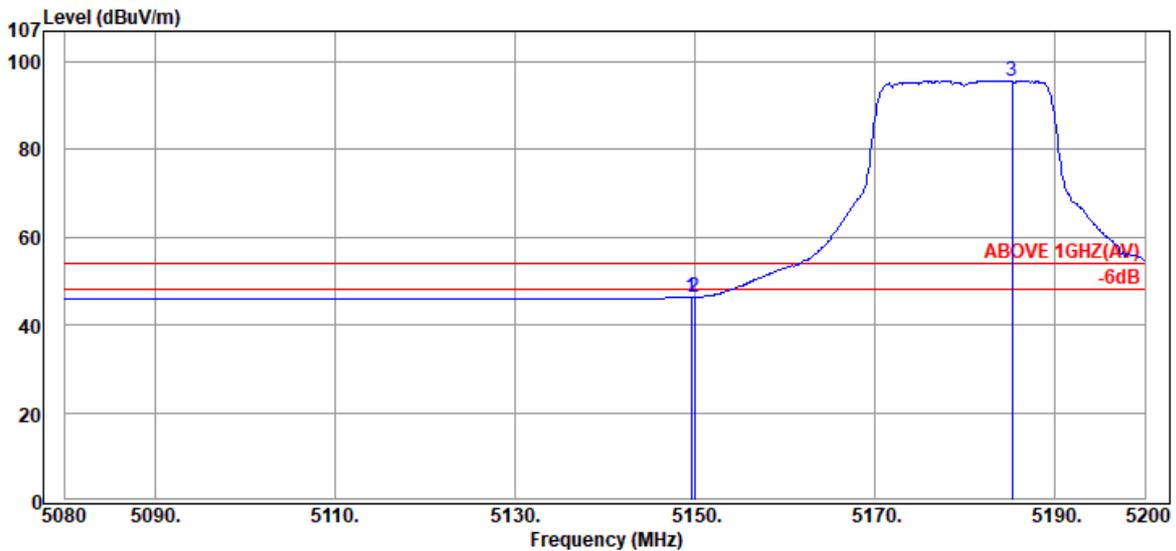


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.60	33.90	8.73	3.70	46.33	54.00	7.67	Average
5149.96	33.90	8.73	3.72	46.35	54.00	7.65	Average
@ 5185.24	34.04	8.75	52.95	95.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2A
		Frequency	TX 5320MHz

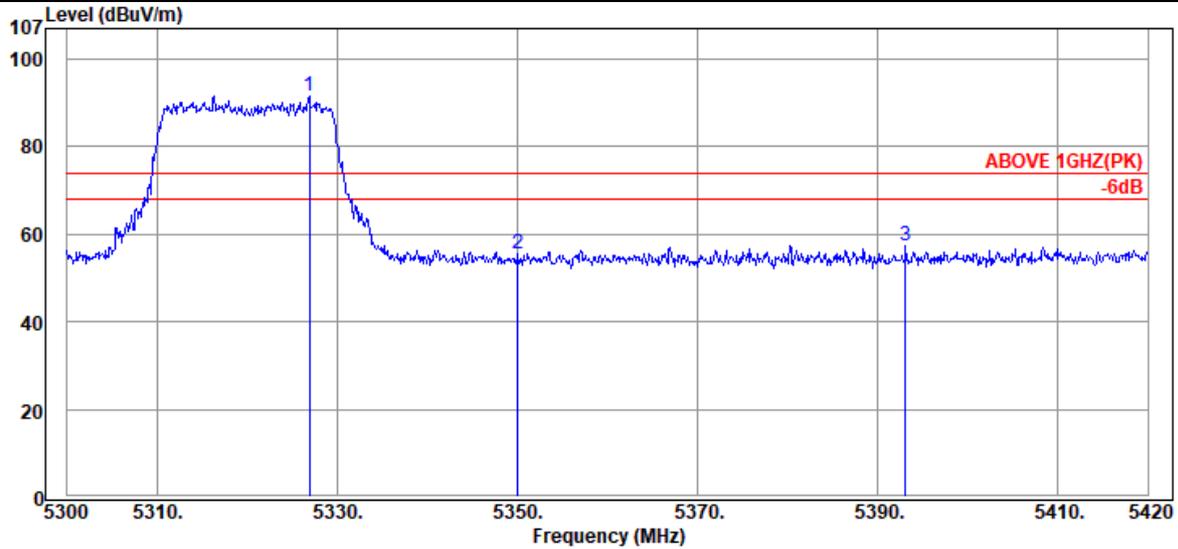

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5326.88	34.50	8.83	48.30	91.63	---	---	Peak
	5350.04	34.50	8.84	12.20	55.54	74.00	18.46	Peak
	5393.12	34.50	8.86	14.07	57.43	74.00	16.57	Peak

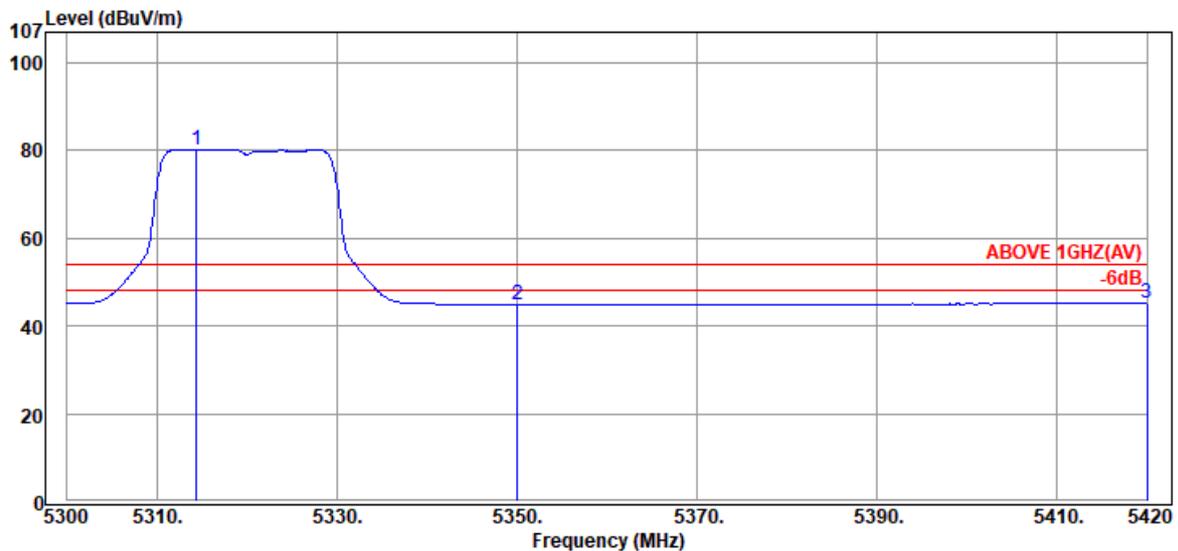


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5314.40	34.50	8.82	37.00	80.32	---	---	Average
	5350.04	34.50	8.84	1.51	44.85	54.00	9.15	Average
	5420.00	34.50	8.88	1.84	45.22	54.00	8.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2A
		Frequency	TX 5320MHz

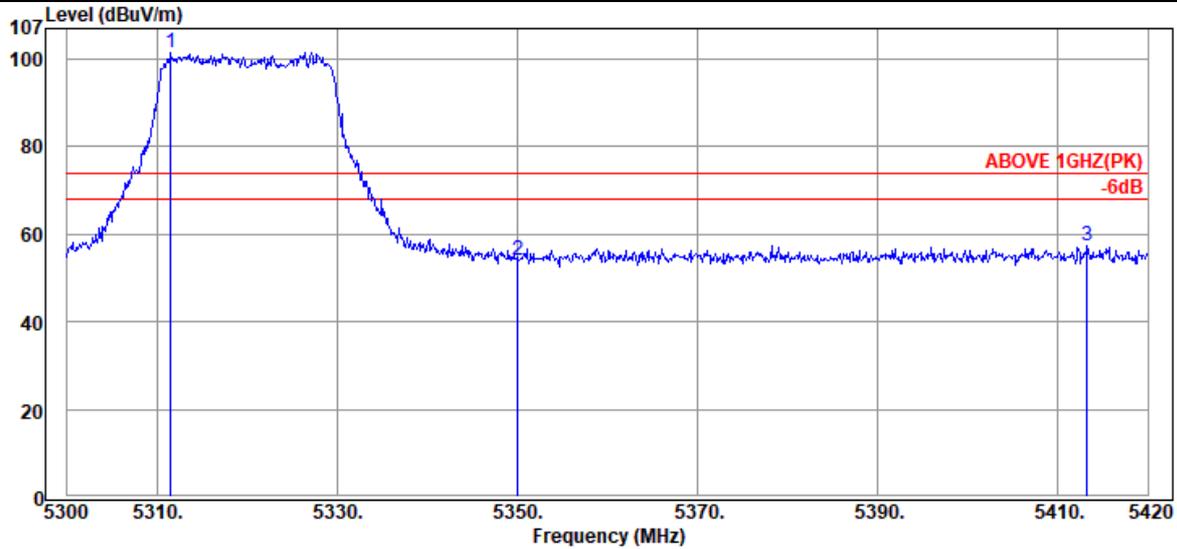

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5311.52	34.50	8.82	58.15	101.47	---	---	Peak
	5350.04	34.50	8.84	10.65	53.99	74.00	20.01	Peak
	5413.28	34.50	8.88	14.01	57.39	74.00	16.61	Peak

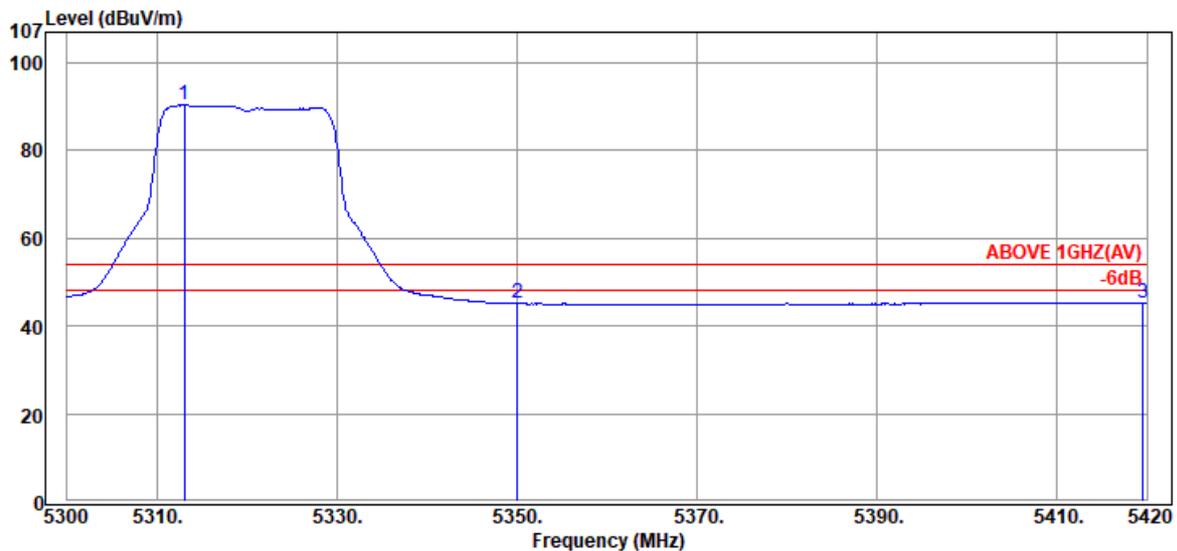


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5313.08	34.50	8.82	47.07	90.39	---	---	Average
	5350.04	34.50	8.84	1.73	45.07	54.00	8.93	Average
	5419.52	34.50	8.88	1.90	45.28	54.00	8.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
		Frequency	TX 5500MHz

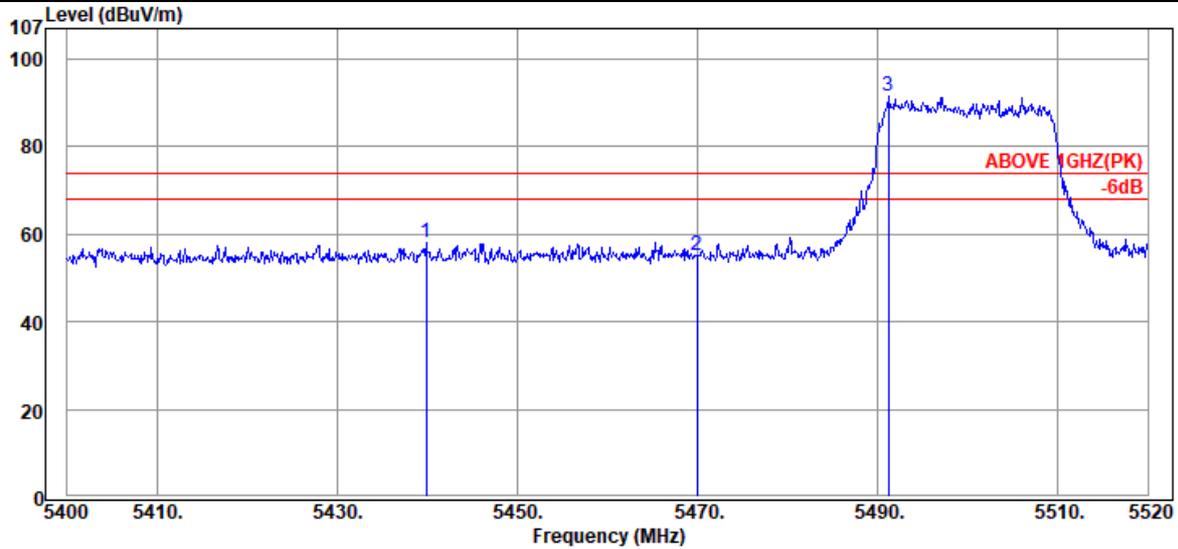

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.84	34.50	8.89	14.84	58.23	74.00	15.77	Peak
5469.96	34.50	8.91	11.75	55.16	74.00	18.84	Peak
@ 5491.20	34.50	8.92	48.22	91.64	---	---	Peak

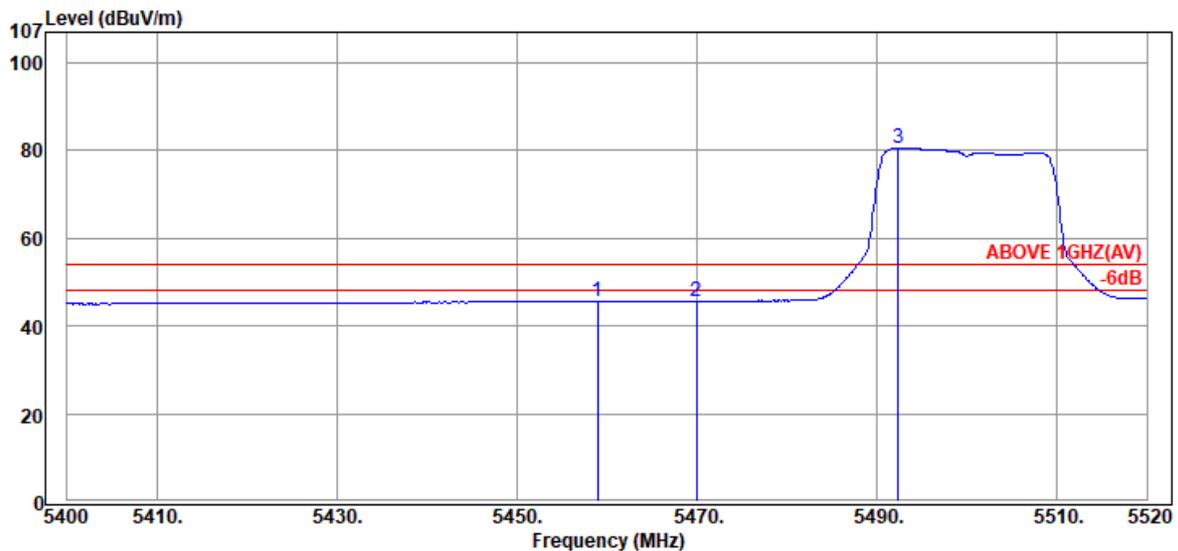


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.92	34.50	8.90	2.17	45.57	54.00	8.43	Average
5469.96	34.50	8.91	2.23	45.64	54.00	8.36	Average
@ 5492.40	34.50	8.92	37.08	80.50	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
		Frequency	TX 5500MHz

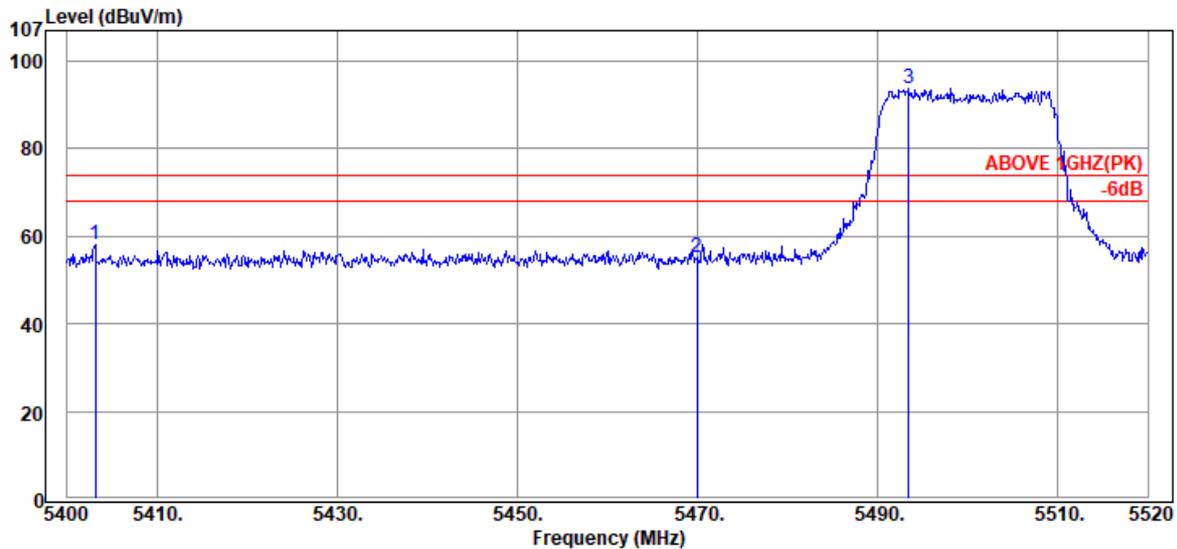

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5403.12	34.50	8.87	14.64	58.01	74.00	15.99	Peak
5469.96	34.50	8.91	11.79	55.20	74.00	18.80	Peak
@ 5493.48	34.50	8.92	50.39	93.81	---	---	Peak

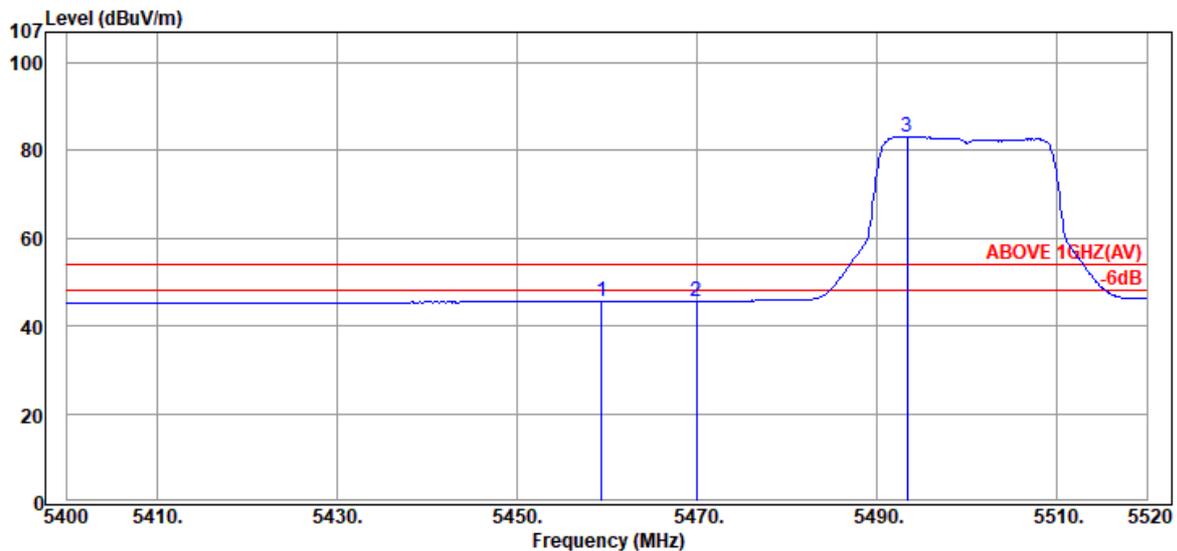


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5459.40	34.50	8.90	2.19	45.59	54.00	8.41	Average
5469.96	34.50	8.91	2.28	45.69	54.00	8.31	Average
@ 5493.36	34.50	8.92	39.70	83.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
		Frequency	TX 5700MHz

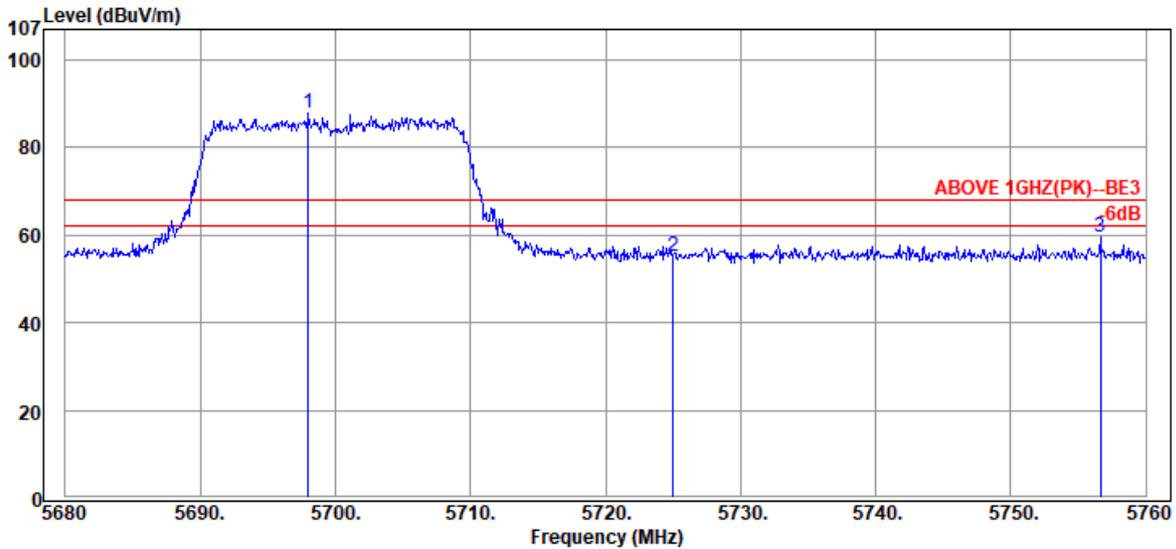

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.00	34.41	9.03	44.48	87.92	---	---	Peak
5725.04	34.40	9.04	11.69	55.13	68.20	13.07	Peak
5756.64	34.37	9.06	16.12	59.55	68.20	8.65	Peak

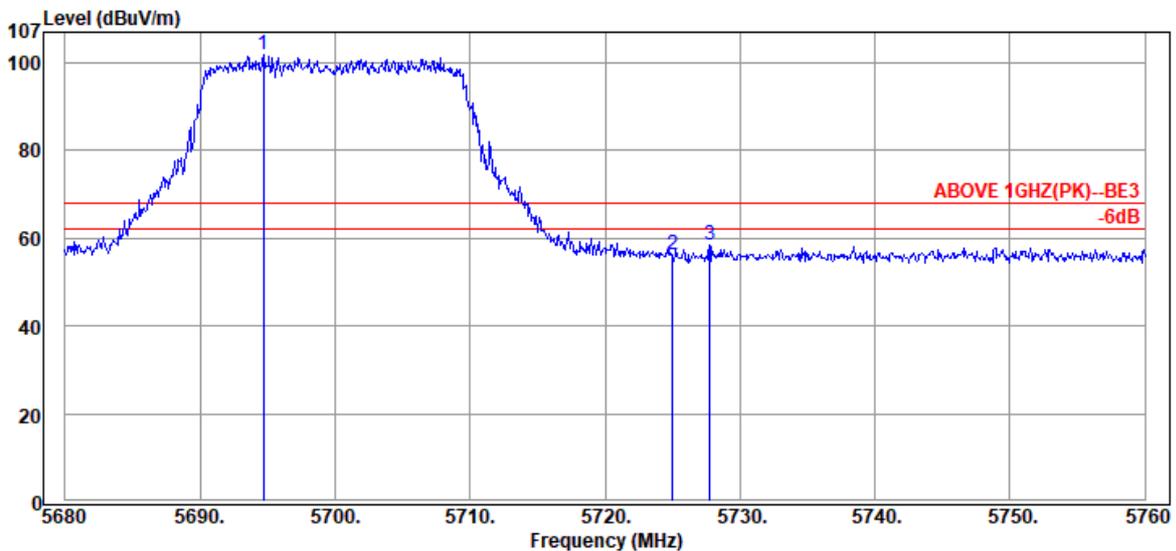


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5694.72	34.42	9.03	58.30	101.75	---	---	Peak
5725.04	34.40	9.04	13.00	56.44	68.20	11.76	Peak
5727.76	34.40	9.04	14.87	58.31	68.20	9.89	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
		Frequency	TX 5720MHz

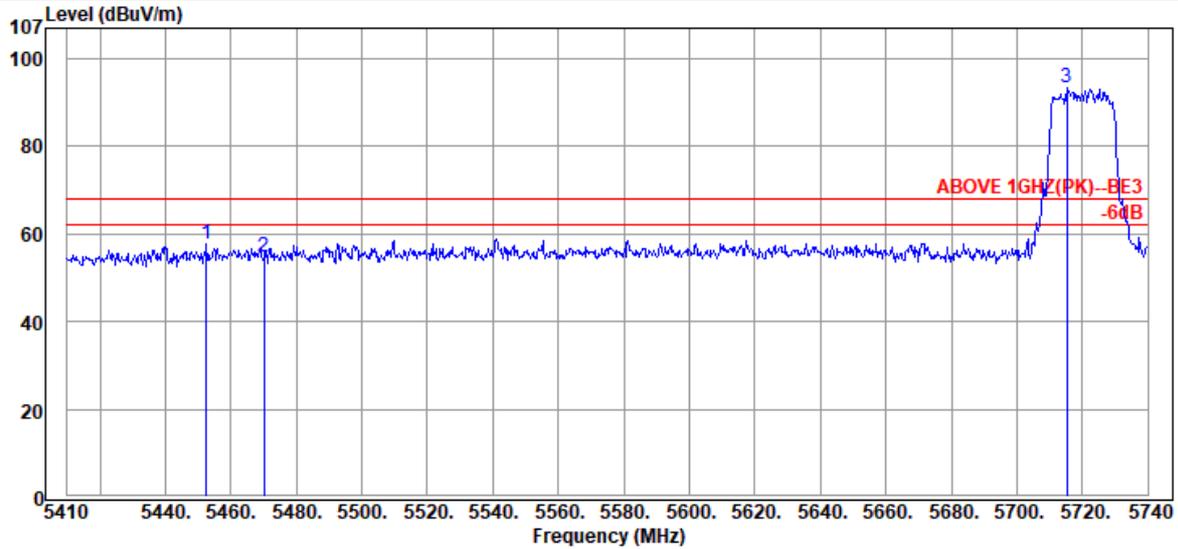

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.57	34.50	8.90	14.18	57.58	68.20	10.62	Peak
5470.06	34.50	8.91	11.21	54.62	68.20	13.58	Peak
@ 5715.25	34.40	9.04	49.88	93.32	---	---	Peak

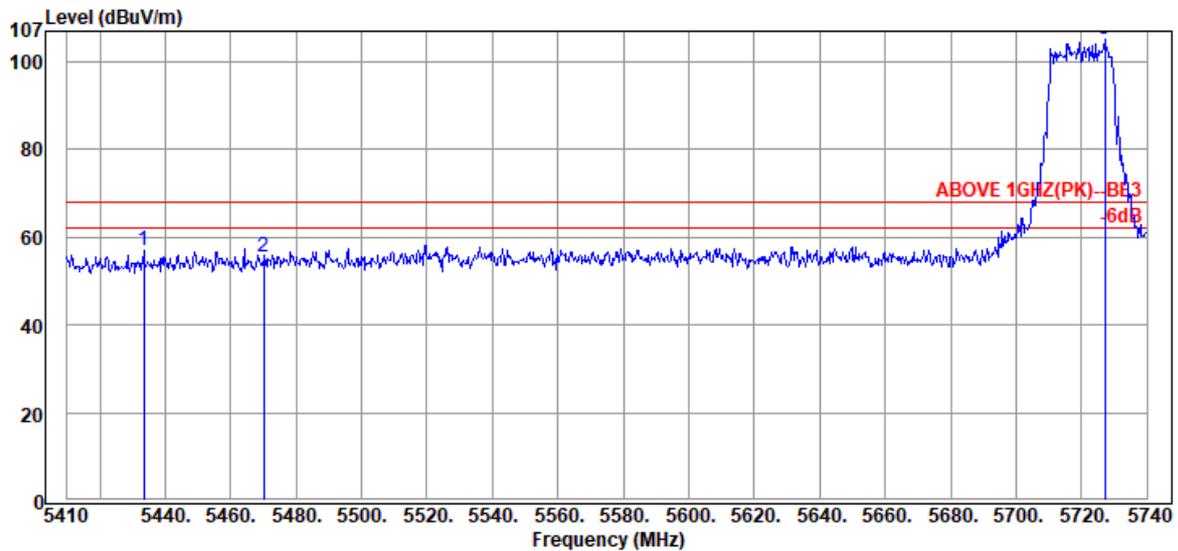


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.43	34.50	8.89	13.68	57.07	68.20	11.13	Peak
5470.06	34.50	8.91	12.17	55.58	68.20	12.62	Peak
@ 5727.13	34.40	9.04	61.55	104.99	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
		Frequency	TX 5720MHz

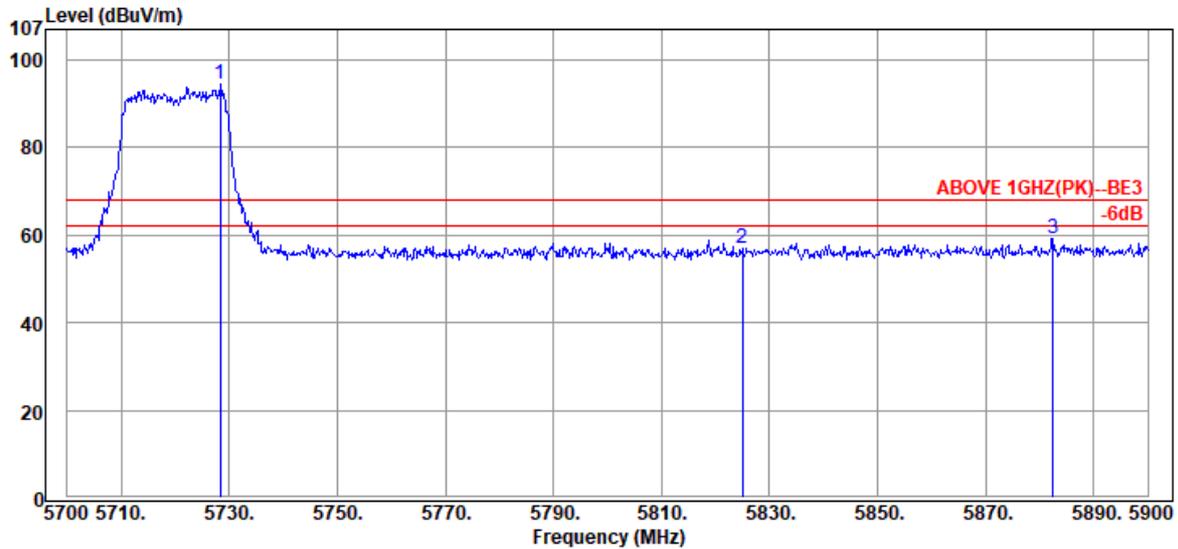

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5728.40	34.40	9.04	50.99	94.43	---	---	Peak
	5825.00	34.30	9.09	13.66	57.05	68.20	11.15	Peak
	5882.40	34.46	9.12	15.70	59.28	68.20	8.92	Peak

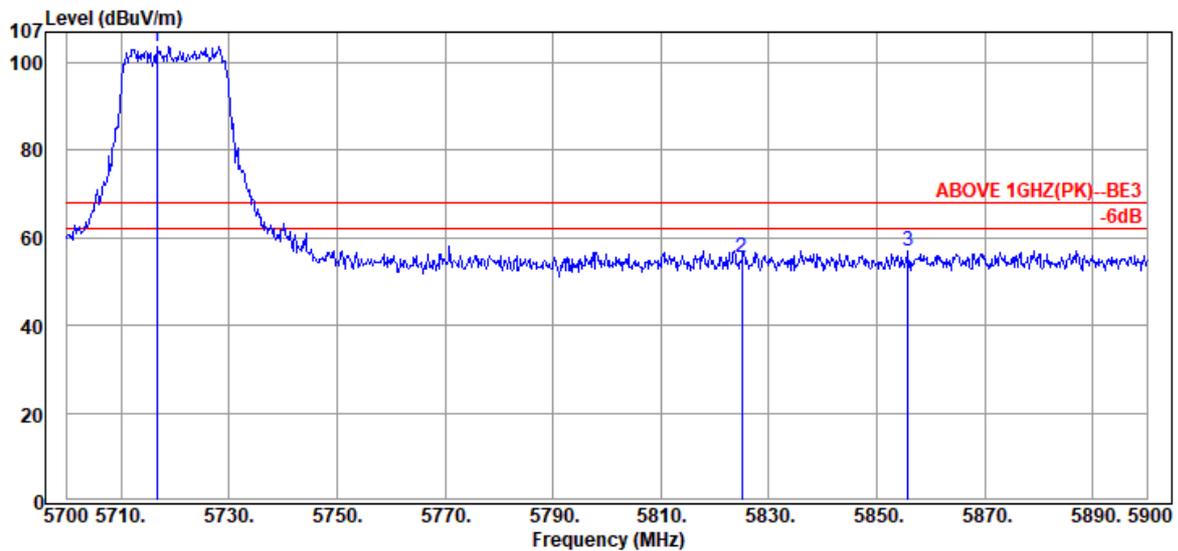


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5716.60	34.40	9.04	60.19	103.63	---	---	Peak
	5825.00	34.30	9.09	12.13	55.52	68.20	12.68	Peak
	5855.80	34.41	9.11	13.37	56.89	68.20	11.31	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-I
		Frequency	TX 5190MHz

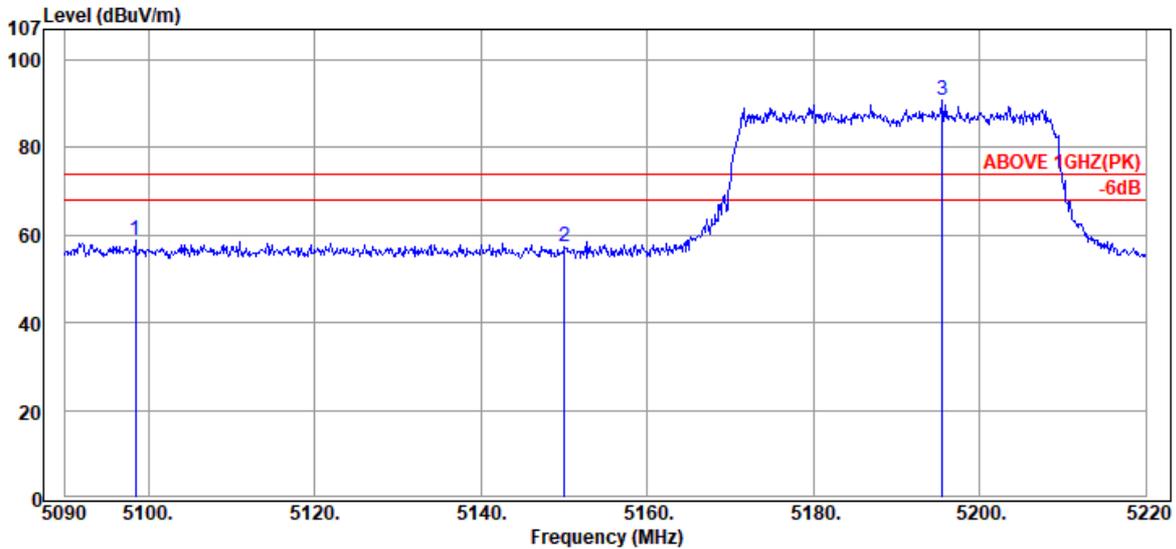

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5098.45	33.80	8.70	16.50	59.00	74.00	15.00	Peak
5150.06	33.90	8.73	14.64	57.27	74.00	16.73	Peak
@ 5195.56	34.08	8.75	47.89	90.72	---	---	Peak

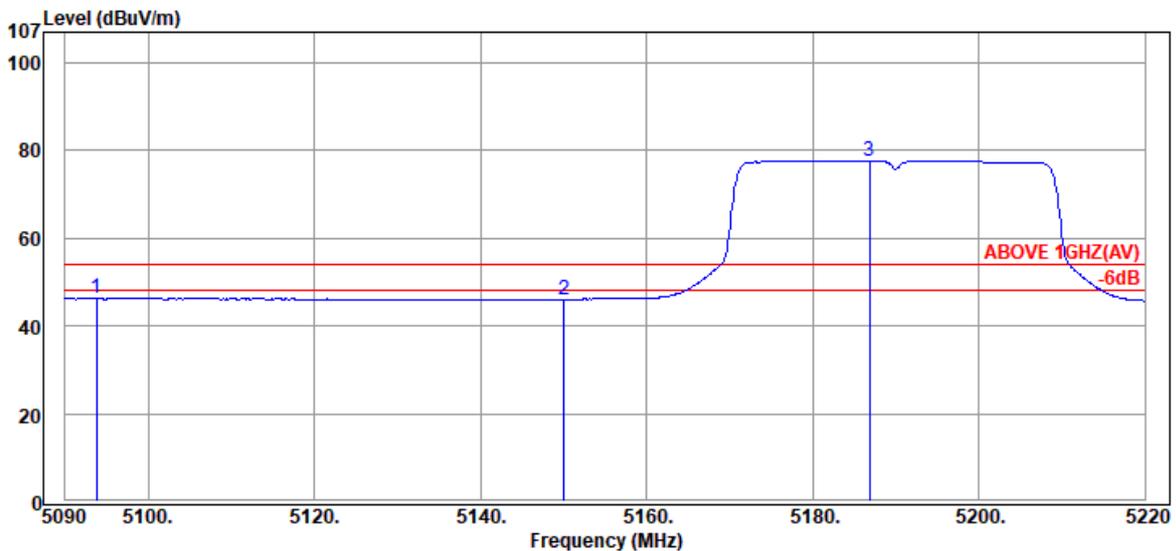


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5093.77	33.80	8.70	3.72	46.22	54.00	7.78	Average
5150.06	33.90	8.73	3.46	46.09	54.00	7.91	Average
@ 5186.85	34.05	8.75	34.92	77.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	I
		Frequency	TX 5190MHz

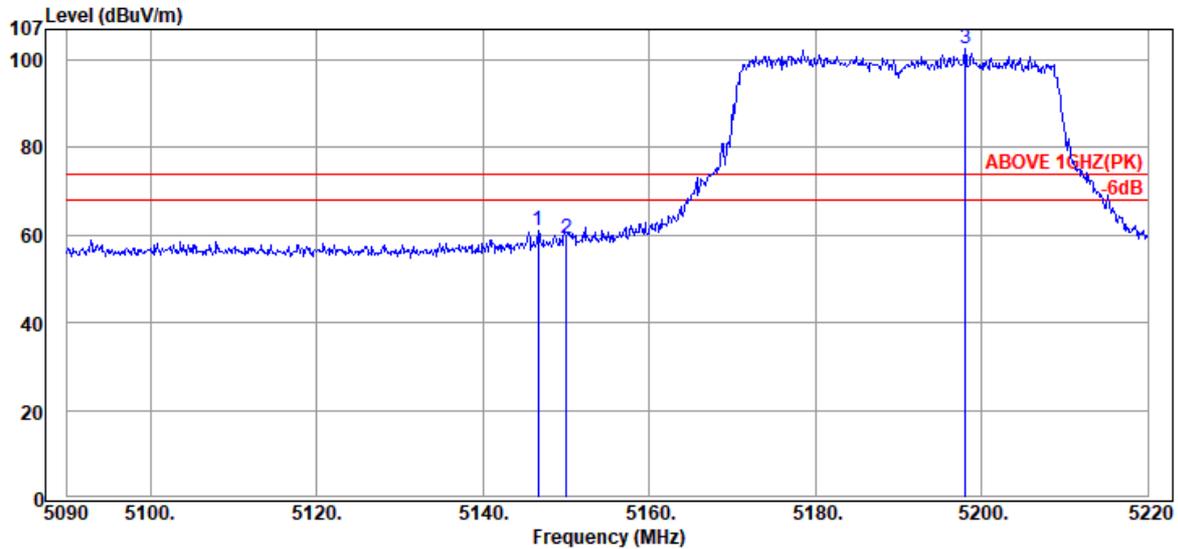

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.68	33.89	8.73	18.24	60.86	74.00	13.14	Peak
5150.06	33.90	8.73	16.42	59.05	74.00	14.95	Peak
@ 5198.03	34.09	8.76	59.66	102.51	---	---	Peak

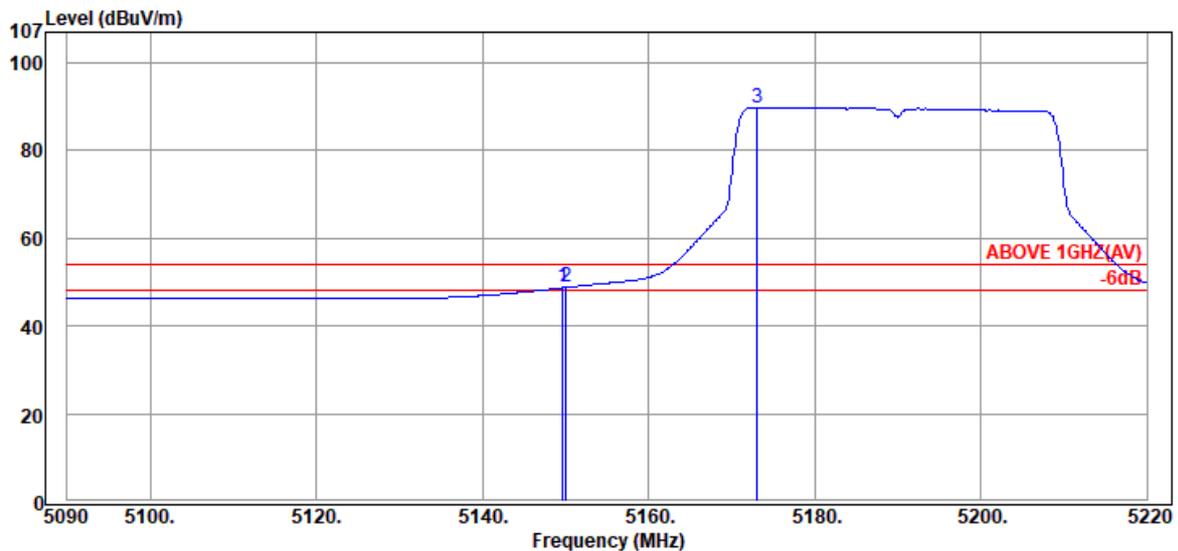


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	6.12	48.75	54.00	5.25	Average
5150.06	33.90	8.73	6.18	48.81	54.00	5.19	Average
@ 5173.07	33.99	8.74	47.14	89.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2A
		Frequency	TX 5310MHz

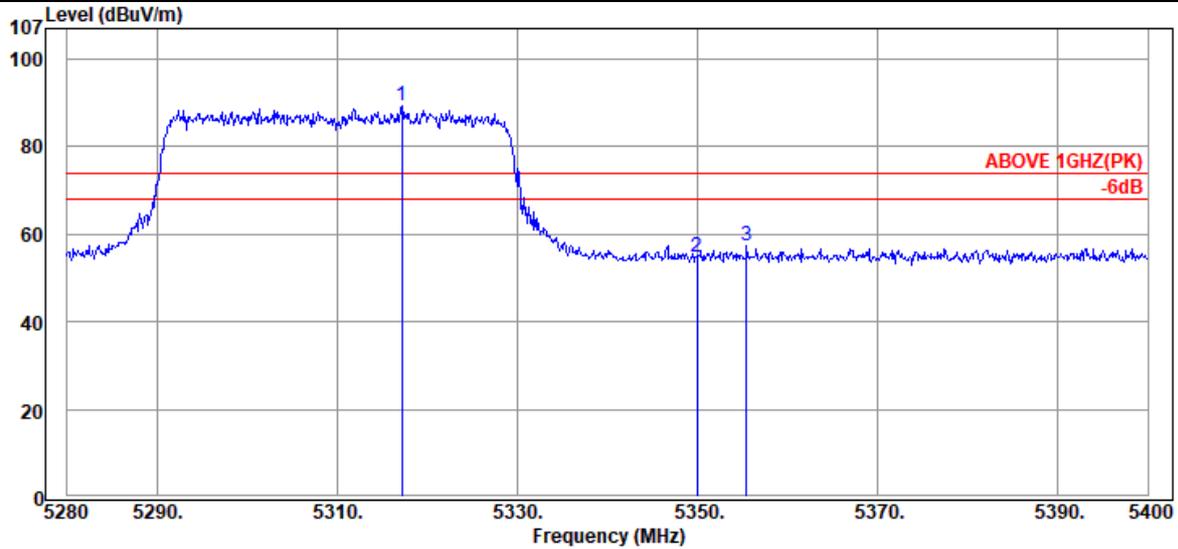

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.20	34.50	8.82	46.03	89.35	---	---	Peak
	5349.96	34.50	8.84	11.58	54.92	74.00	19.08	Peak
	5355.48	34.50	8.84	14.19	57.53	74.00	16.47	Peak

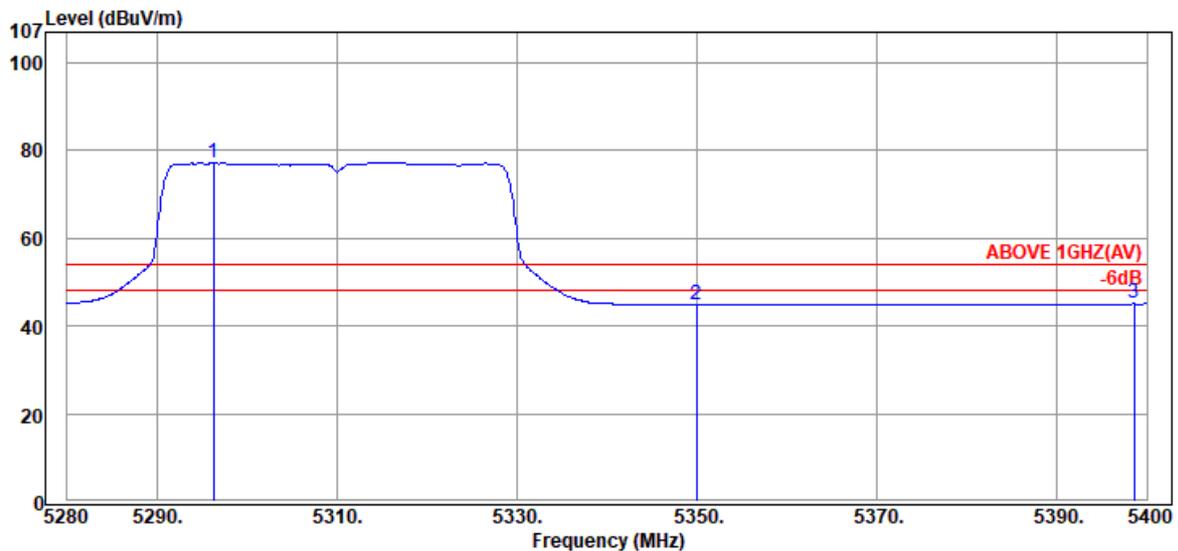


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5296.32	34.49	8.81	33.93	77.23	---	---	Average
	5349.96	34.50	8.84	1.55	44.89	54.00	9.11	Average
	5398.56	34.50	8.87	1.72	45.09	54.00	8.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2A
		Frequency	TX 5310MHz

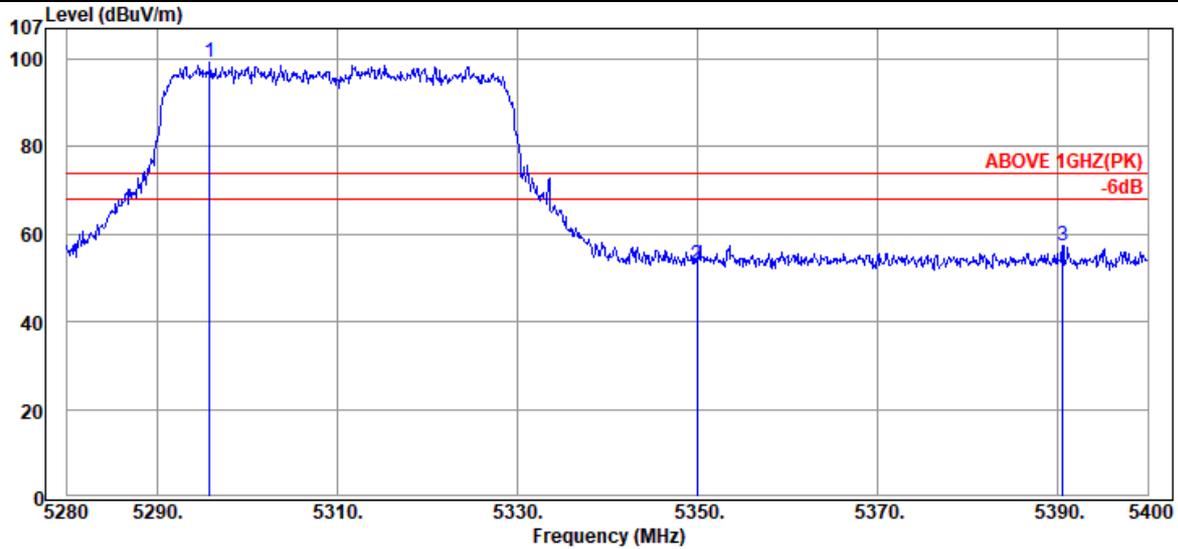

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5295.84	34.49	8.81	55.86	99.16	---	---	Peak
	5349.96	34.50	8.84	9.48	52.82	74.00	21.18	Peak
	5390.52	34.50	8.86	14.05	57.41	74.00	16.59	Peak

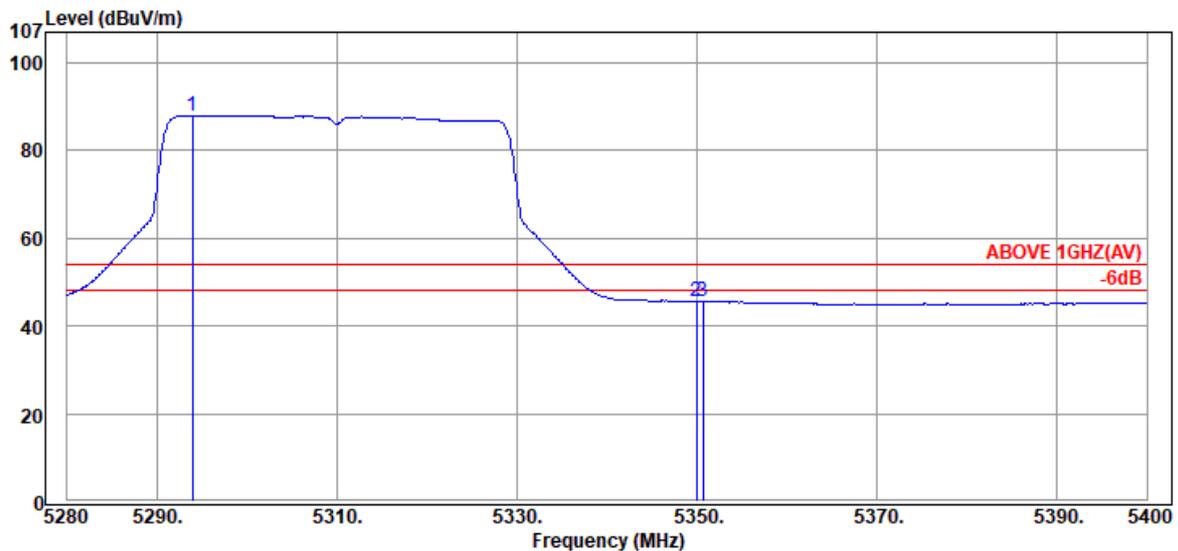


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5293.92	34.49	8.81	44.70	88.00	---	---	Average
	5349.96	34.50	8.84	2.29	45.63	54.00	8.37	Average
	5350.68	34.50	8.84	2.32	45.66	54.00	8.34	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2C
		Frequency	TX 5510MHz

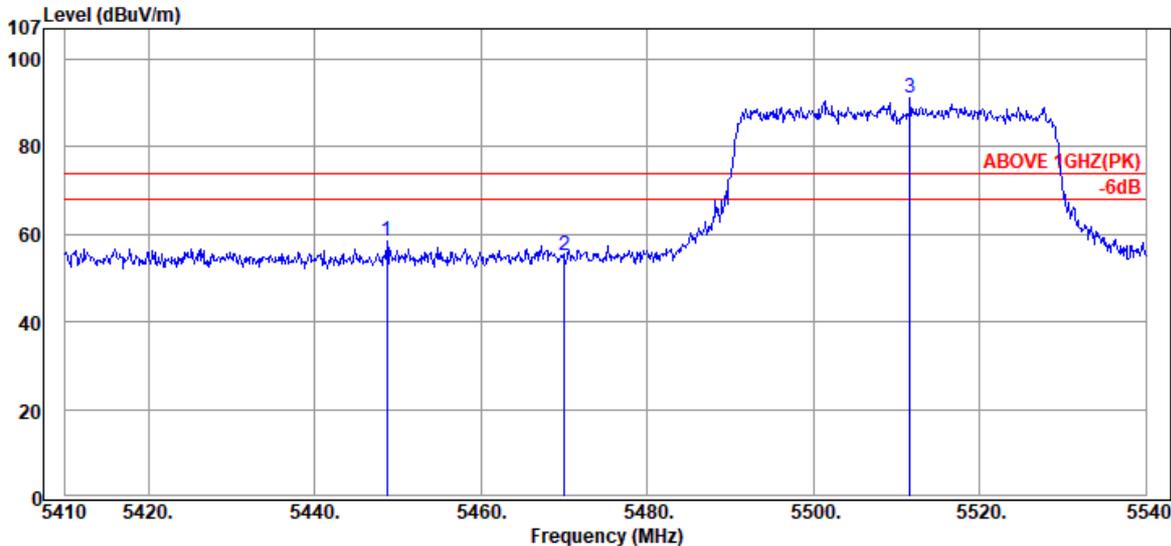

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.74	34.50	8.89	14.90	58.29	74.00	15.71	Peak
5470.06	34.50	8.91	11.64	55.05	74.00	18.95	Peak
@ 5511.66	34.52	8.93	47.60	91.05	---	---	Peak

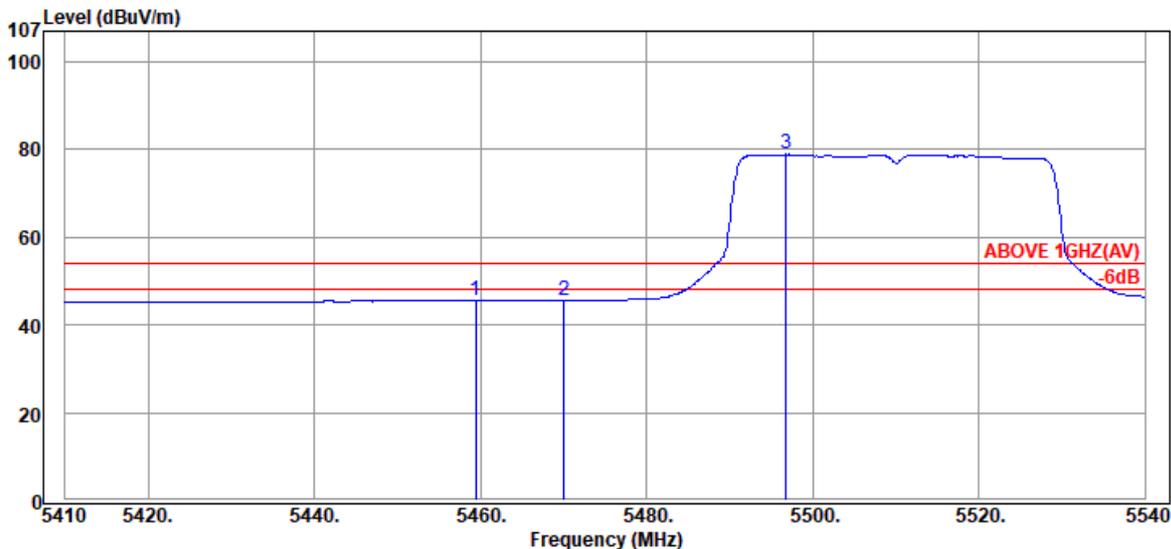


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.40	34.50	8.90	2.19	45.59	54.00	8.41	Average
5470.06	34.50	8.91	2.25	45.66	54.00	8.34	Average
@ 5496.84	34.50	8.92	35.47	78.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2C
		Frequency	TX 5510MHz

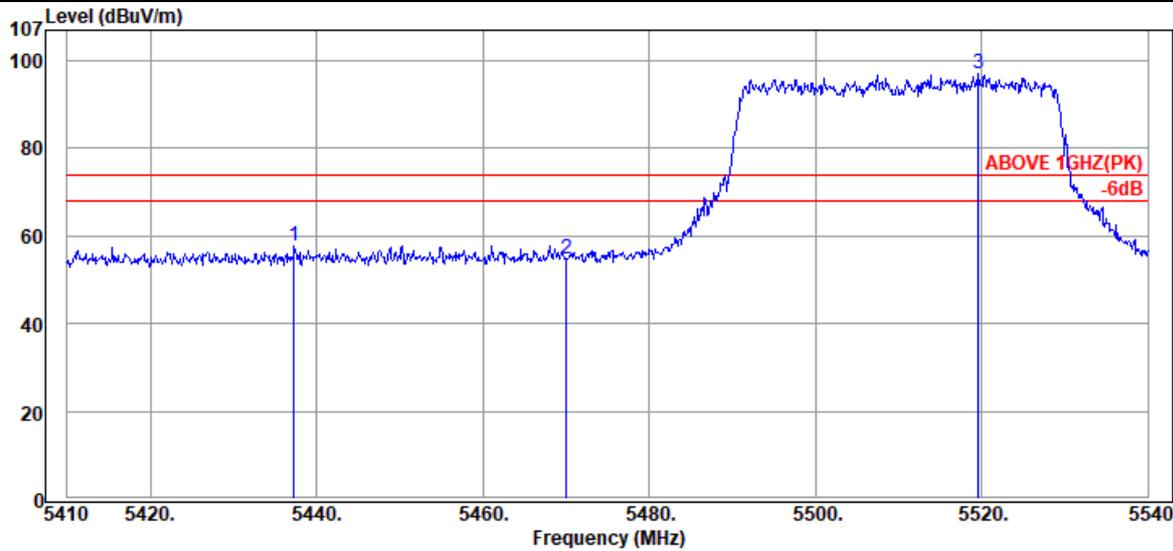

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.30	34.50	8.89	14.49	57.88	74.00	16.12	Peak
5470.06	34.50	8.91	11.53	54.94	74.00	19.06	Peak
@ 5519.59	34.54	8.93	53.72	97.19	---	---	Peak

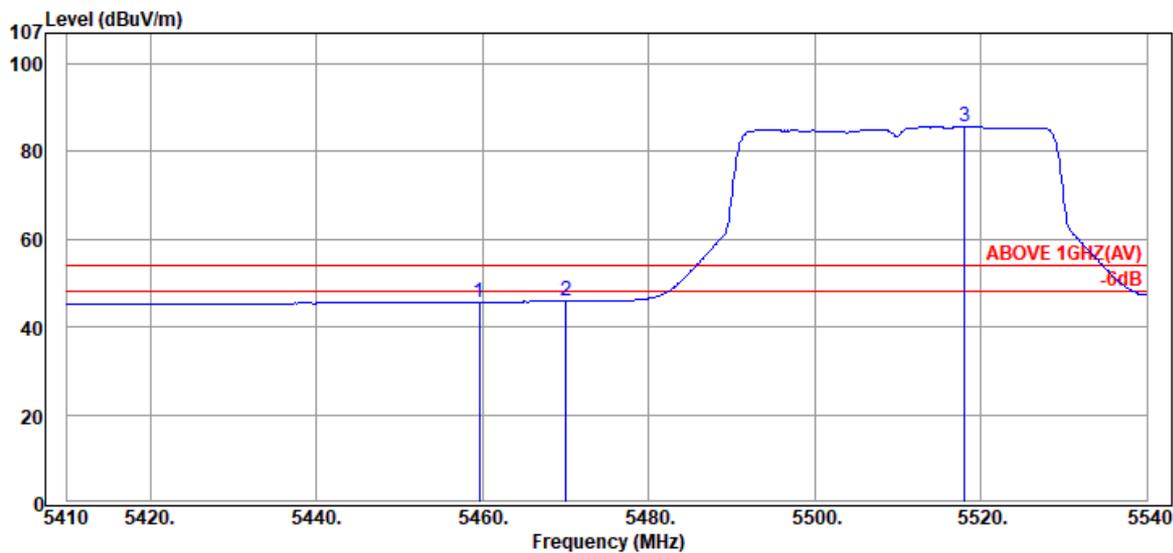


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.66	34.50	8.90	2.28	45.68	54.00	8.32	Average
5470.06	34.50	8.91	2.49	45.90	54.00	8.10	Average
@ 5518.03	34.54	8.93	42.21	85.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2C
		Frequency	TX 5670MHz

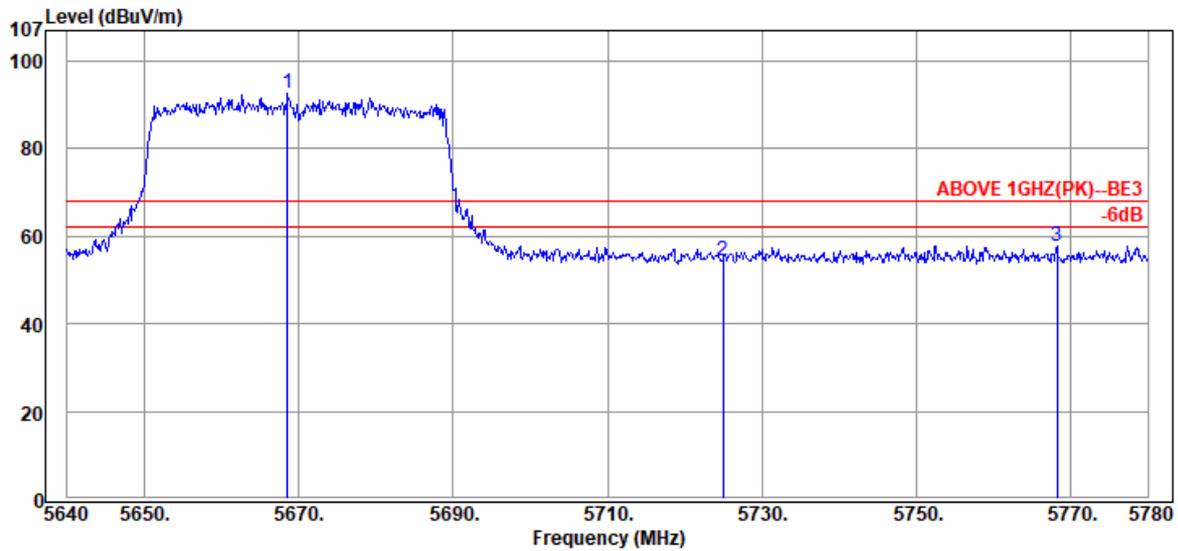

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
@	5668.56	34.53	9.01	49.02	92.56	---	---	Peak
	5724.98	34.40	9.04	10.83	54.27	68.20	13.93	Peak
	5768.24	34.33	9.06	14.48	57.87	68.20	10.33	Peak

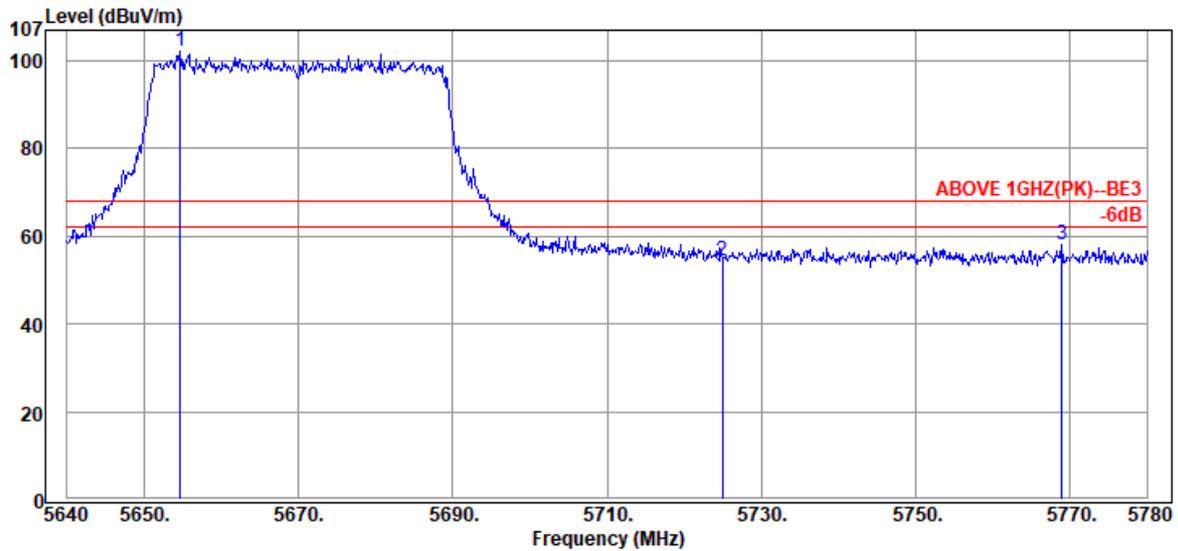


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
@	5654.70	34.58	9.00	58.49	102.07	---	---	Peak
	5724.98	34.40	9.04	11.03	54.47	68.20	13.73	Peak
	5768.94	34.32	9.06	14.69	58.07	68.20	10.13	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2C
		Frequency	TX 5710MHz

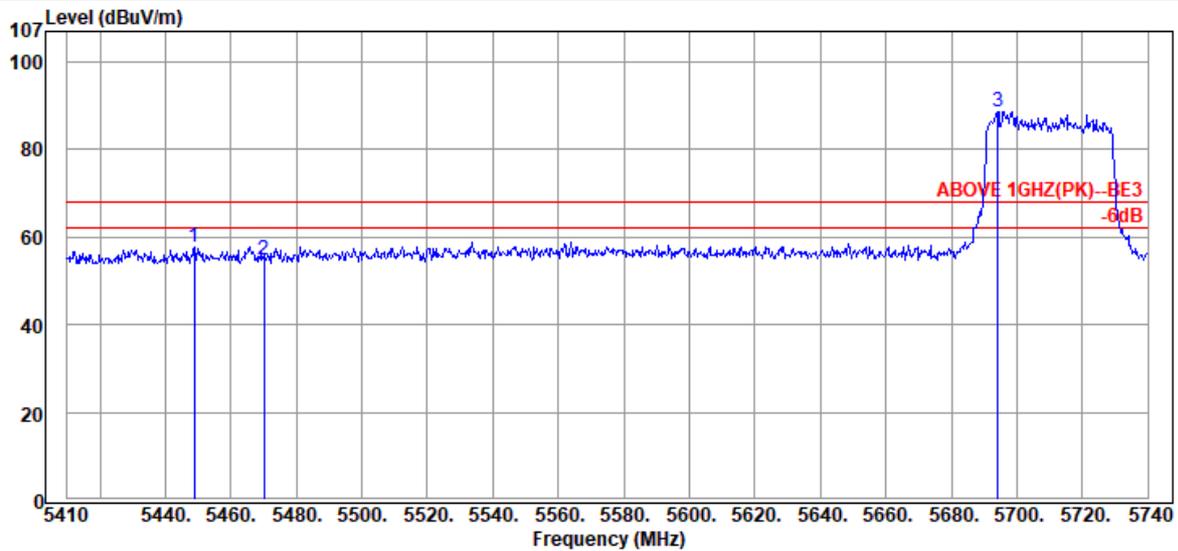

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.94	34.50	8.89	14.24	57.63	68.20	10.57	Peak
5470.06	34.50	8.91	11.36	54.77	68.20	13.43	Peak
@ 5694.13	34.42	9.03	45.22	88.67	---	---	Peak

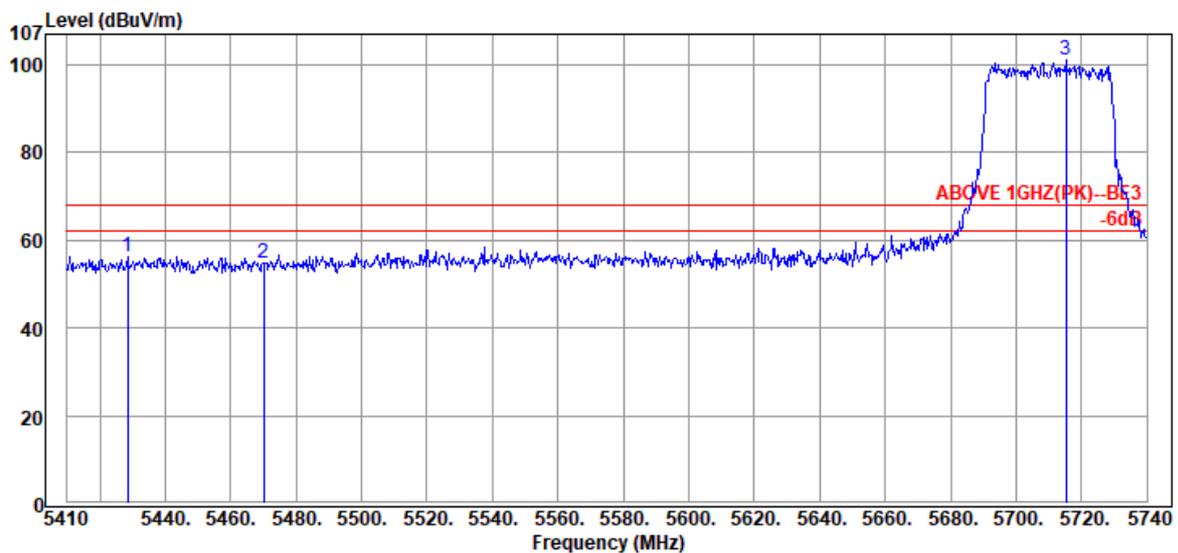


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.48	34.50	8.88	13.06	56.44	68.20	11.76	Peak
5470.06	34.50	8.91	11.34	54.75	68.20	13.45	Peak
@ 5715.25	34.40	9.04	57.53	100.97	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2C
		Frequency	TX 5710MHz

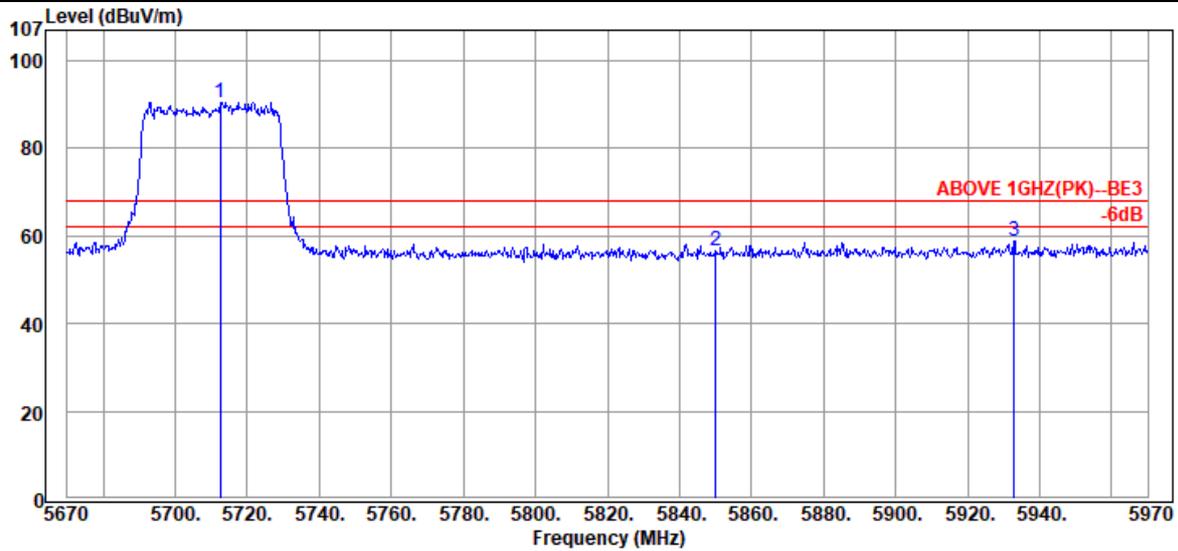

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5712.60	34.40	9.03	47.14	90.57	---	---	Peak
	5850.00	34.40	9.11	13.14	56.65	68.20	11.55	Peak
	5932.80	34.70	9.15	15.00	58.85	68.20	9.35	Peak

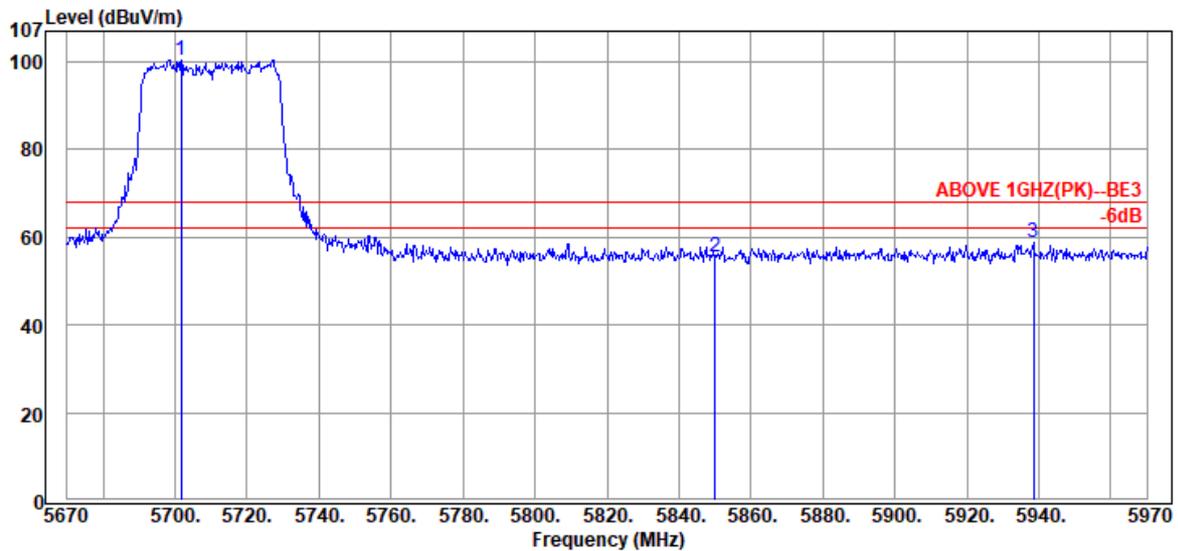


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.80	34.40	9.03	57.07	100.50	---	---	Peak
	5850.00	34.40	9.11	11.92	55.43	68.20	12.77	Peak
	5938.50	34.73	9.15	14.98	58.86	68.20	9.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-I
		Frequency	TX 5210MHz

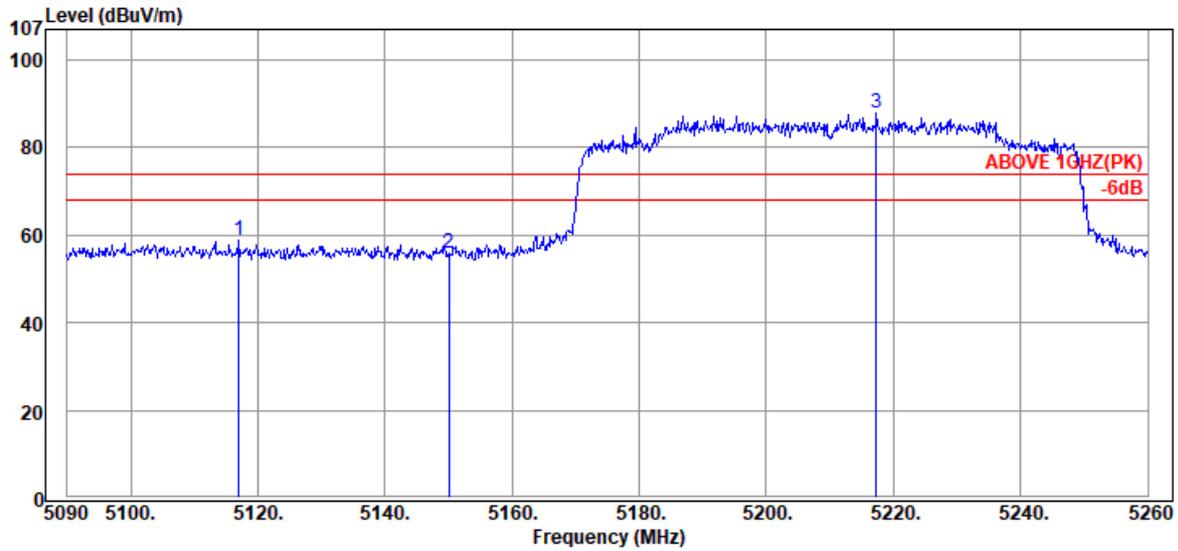

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.03	33.83	8.71	16.33	58.87	74.00	15.13	Peak
5150.01	33.90	8.73	13.28	55.91	74.00	18.09	Peak
@ 5217.33	34.20	8.77	44.86	87.83	---	---	Peak

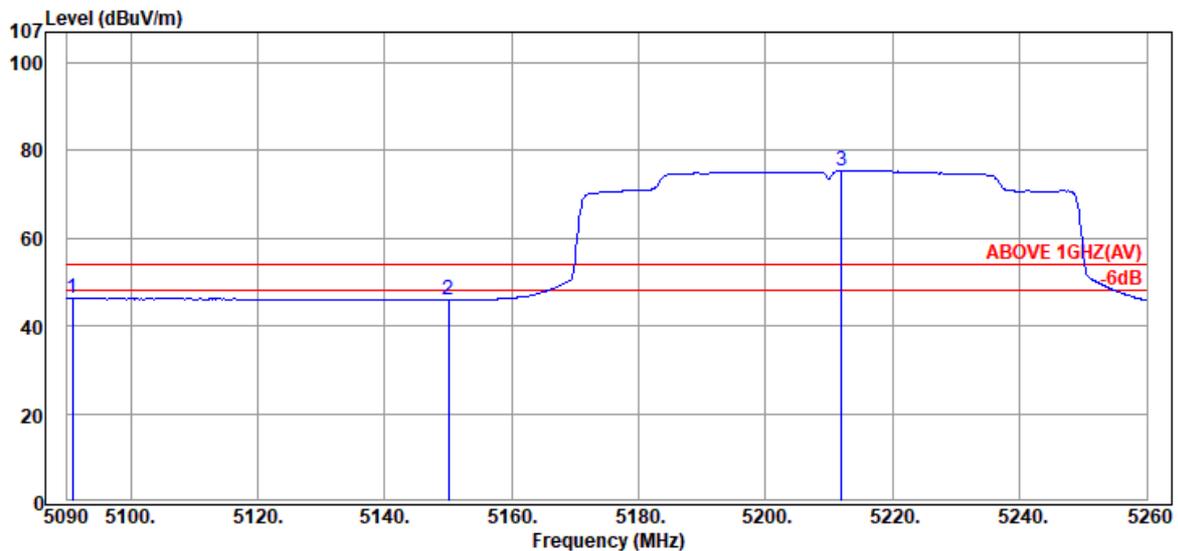


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5090.85	33.80	8.69	3.72	46.21	54.00	7.79	Average
5150.01	33.90	8.73	3.36	45.99	54.00	8.01	Average
@ 5211.89	34.17	8.76	32.59	75.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-I
		Frequency	TX 5210MHz

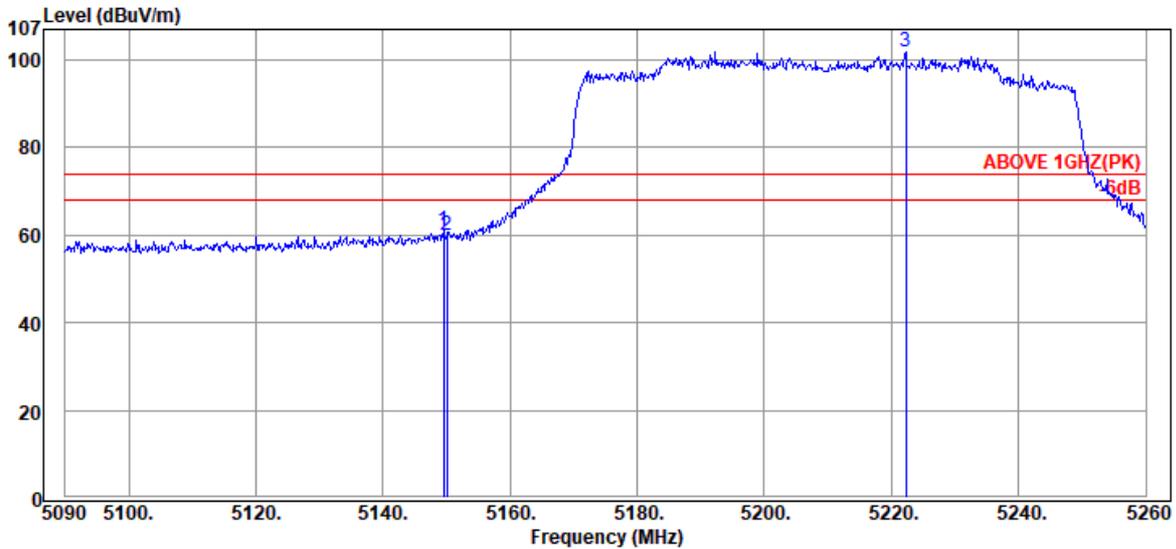

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	33.90	8.73	18.45	61.08	74.00	12.92	Peak
5150.01	33.90	8.73	17.30	59.93	74.00	14.07	Peak
@ 5222.26	34.23	8.77	58.97	101.97	---	---	Peak

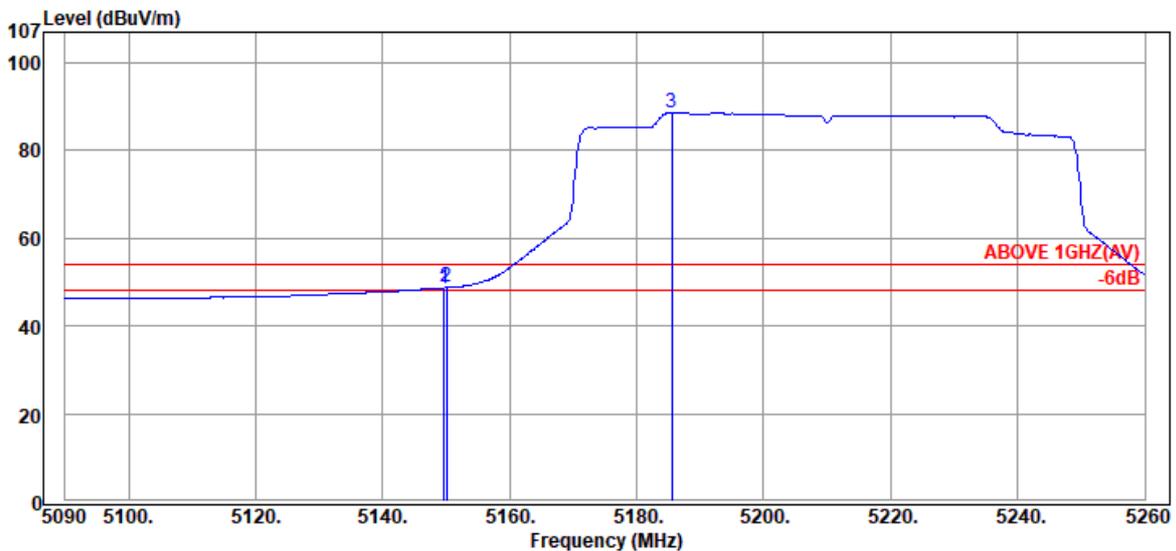


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.67	33.90	8.73	6.08	48.71	54.00	5.29	Average
5150.01	33.90	8.73	6.15	48.78	54.00	5.22	Average
@ 5185.54	34.04	8.75	45.77	88.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2A
		Frequency	TX 5290MHz

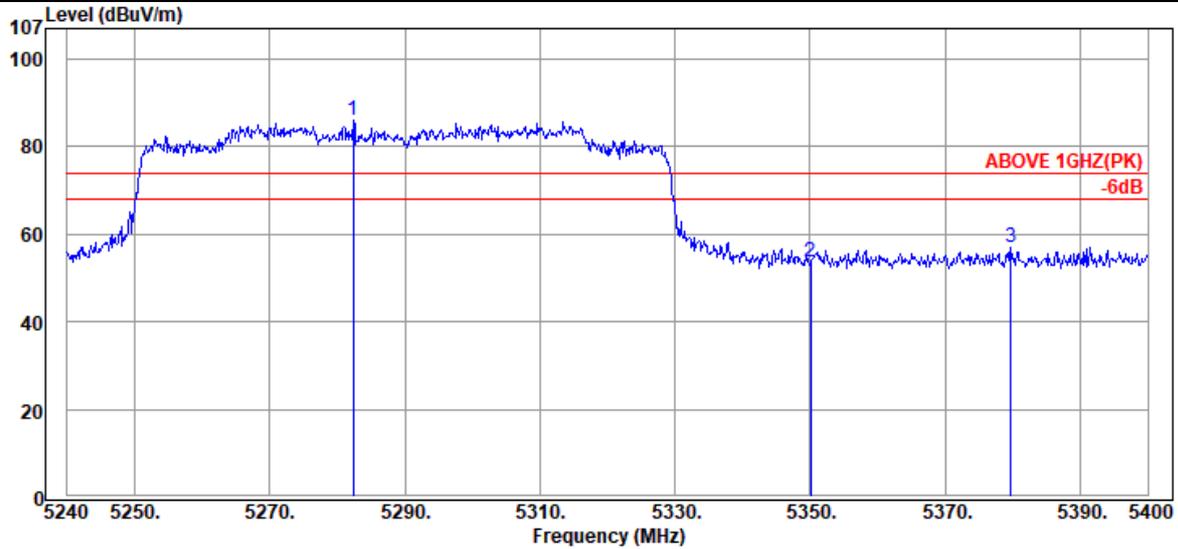

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5282.40	34.46	8.80	42.66	85.92	---	---	Peak
	5350.08	34.50	8.84	10.47	53.81	74.00	20.19	Peak
	5379.68	34.50	8.86	13.53	56.89	74.00	17.11	Peak

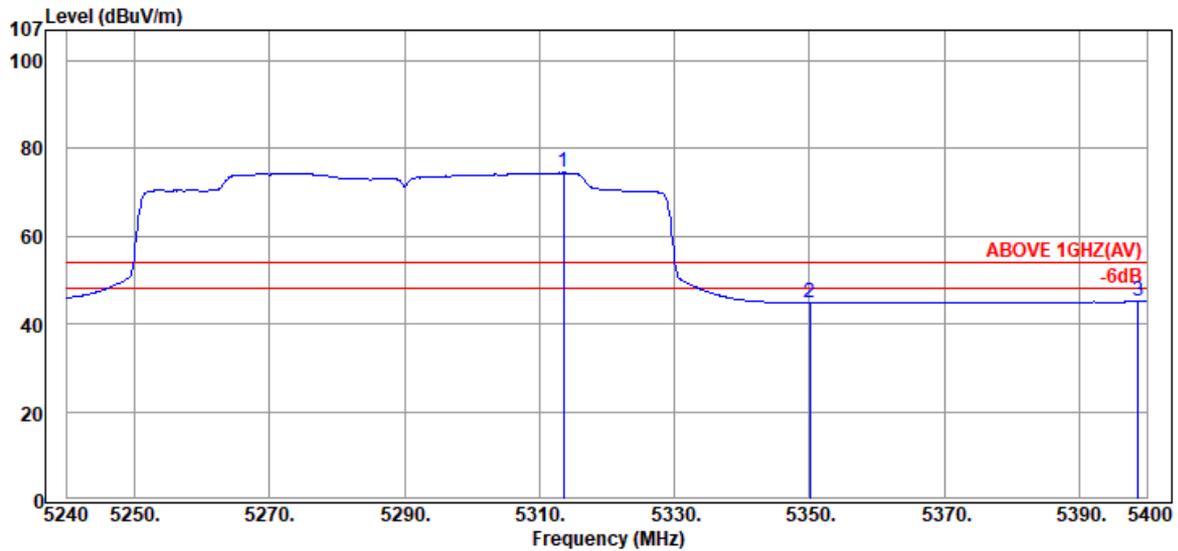


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5313.60	34.50	8.82	31.16	74.48	---	---	Average
	5350.08	34.50	8.84	1.60	44.94	54.00	9.06	Average
	5398.72	34.50	8.87	1.72	45.09	54.00	8.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2A
		Frequency	TX 5290MHz

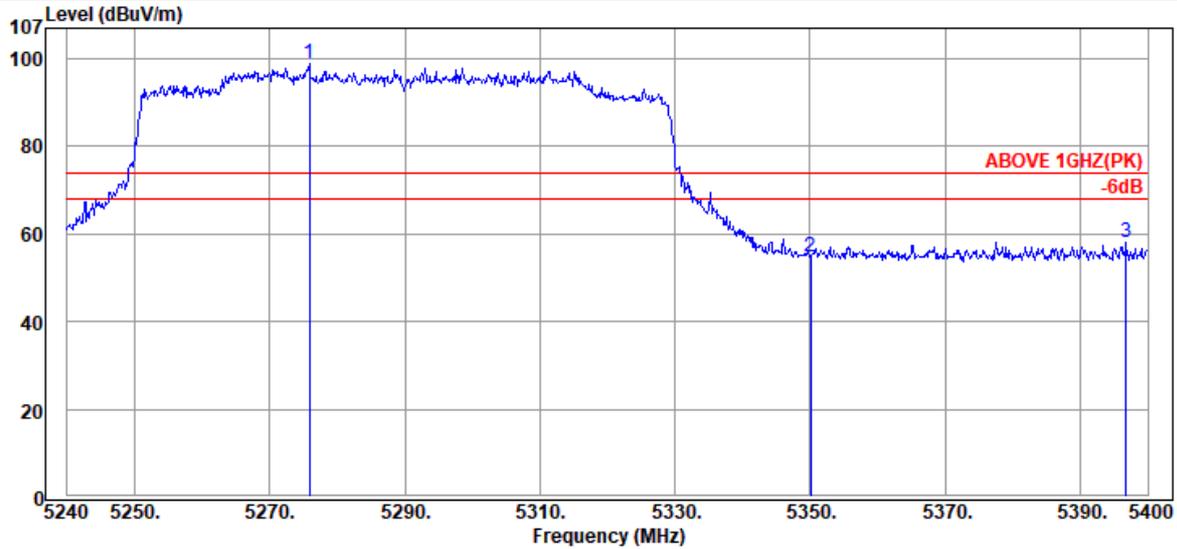

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5275.84	34.45	8.80	55.64	98.89	---	---	Peak
	5350.08	34.50	8.84	11.58	54.92	74.00	19.08	Peak
	5396.80	34.50	8.87	14.82	58.19	74.00	15.81	Peak

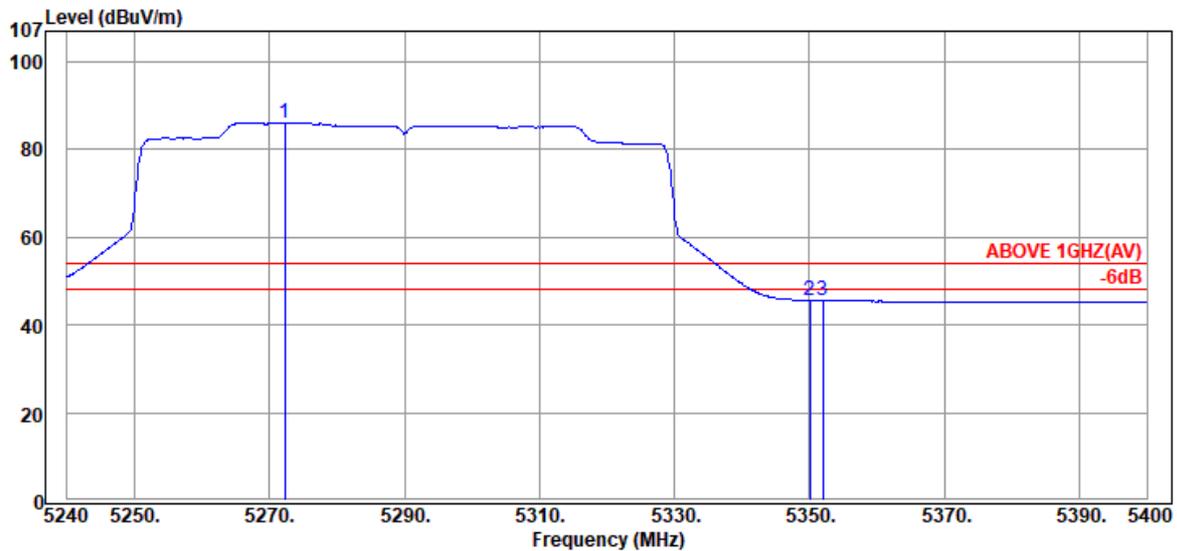


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5272.32	34.44	8.80	42.88	86.12	---	---	Average
	5350.08	34.50	8.84	2.26	45.60	54.00	8.40	Average
	5352.00	34.50	8.84	2.31	45.65	54.00	8.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2C
		Frequency	TX 5530MHz

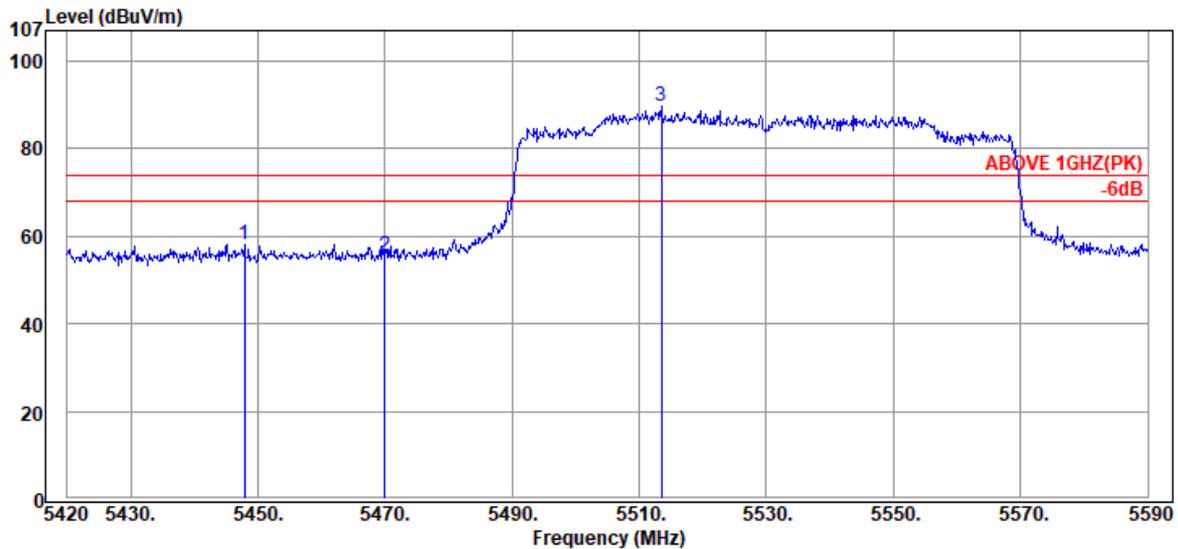

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.88	34.50	8.89	14.72	58.11	74.00	15.89	Peak
5469.98	34.50	8.91	11.95	55.36	74.00	18.64	Peak
@ 5513.50	34.53	8.93	46.38	89.84	---	---	Peak

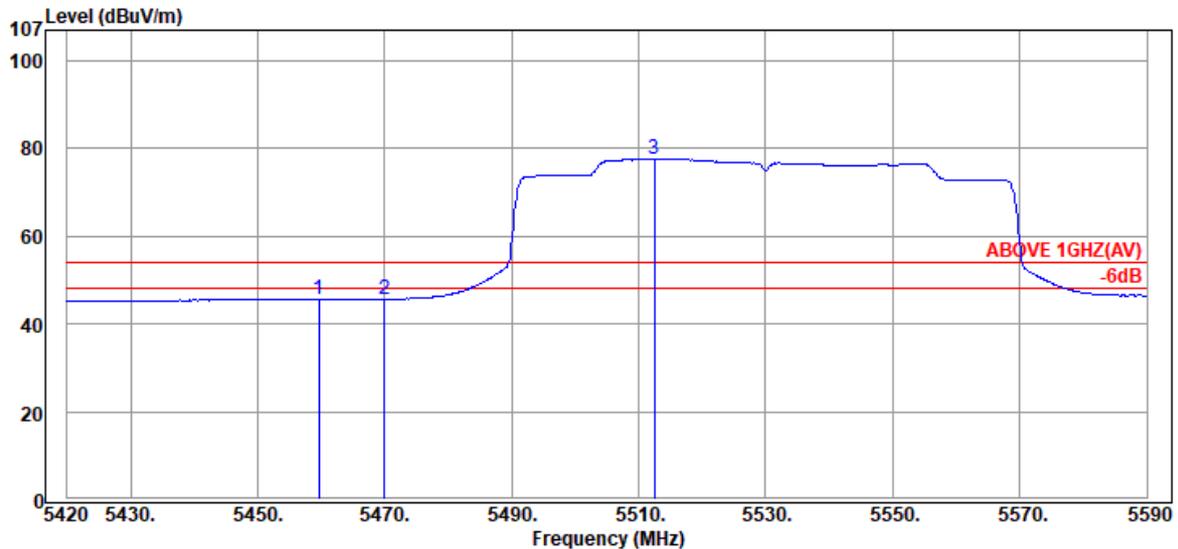


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.61	34.50	8.90	2.28	45.68	54.00	8.32	Average
5469.98	34.50	8.91	2.32	45.73	54.00	8.27	Average
@ 5512.48	34.52	8.93	34.31	77.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2C
		Frequency	TX 5530MHz

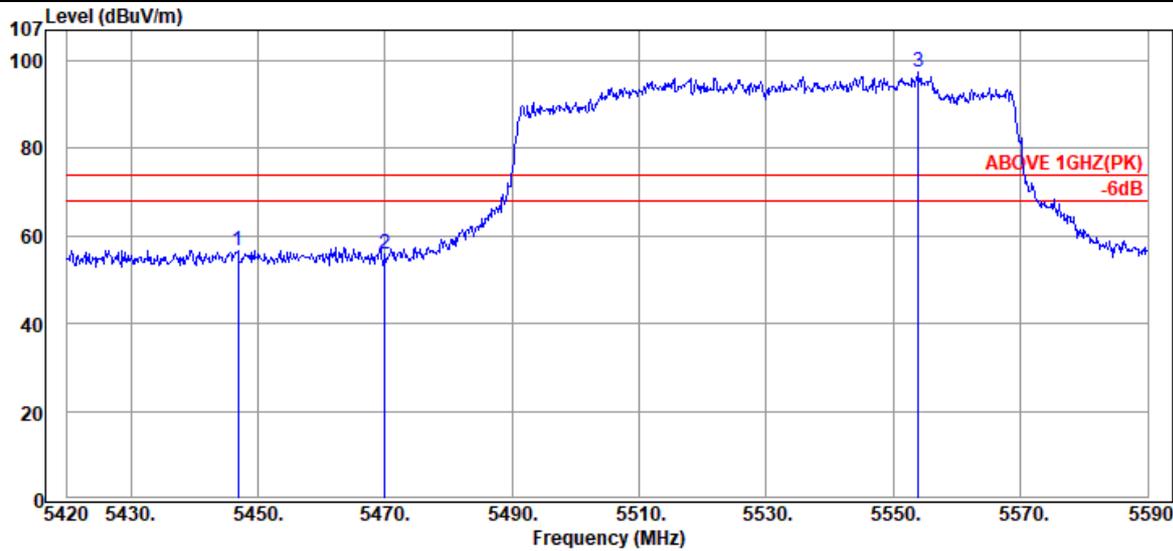

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.86	34.50	8.89	13.35	56.74	74.00	17.26	Peak
5469.98	34.50	8.91	12.57	55.98	74.00	18.02	Peak
@ 5553.96	34.61	8.95	53.84	97.40	---	---	Peak

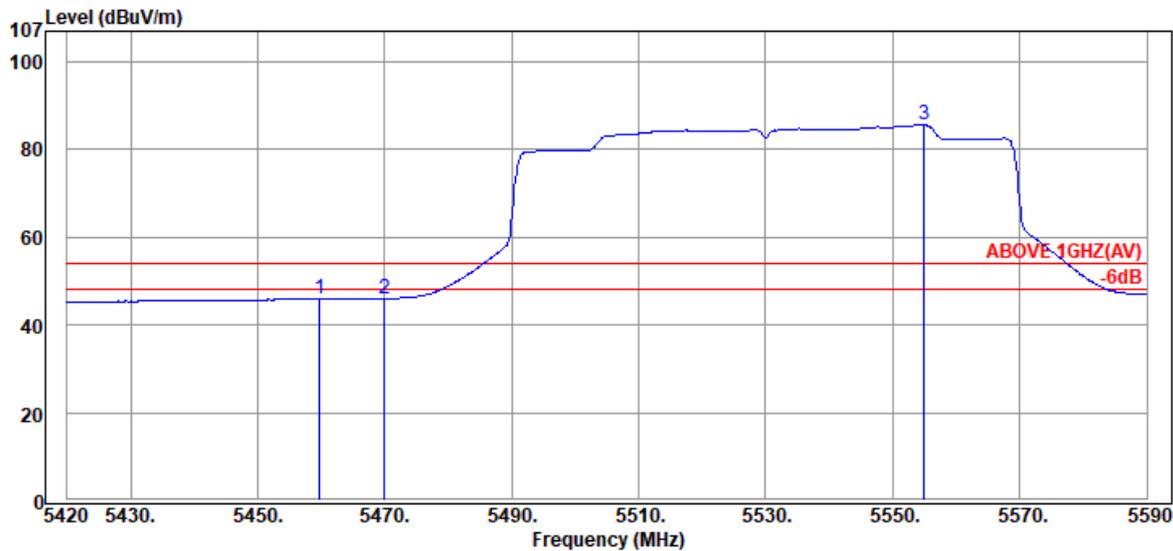


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.78	34.50	8.90	2.48	45.88	54.00	8.12	Average
5469.98	34.50	8.91	2.58	45.99	54.00	8.01	Average
@ 5554.98	34.61	8.95	42.05	85.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2C
		Frequency	TX 5690MHz

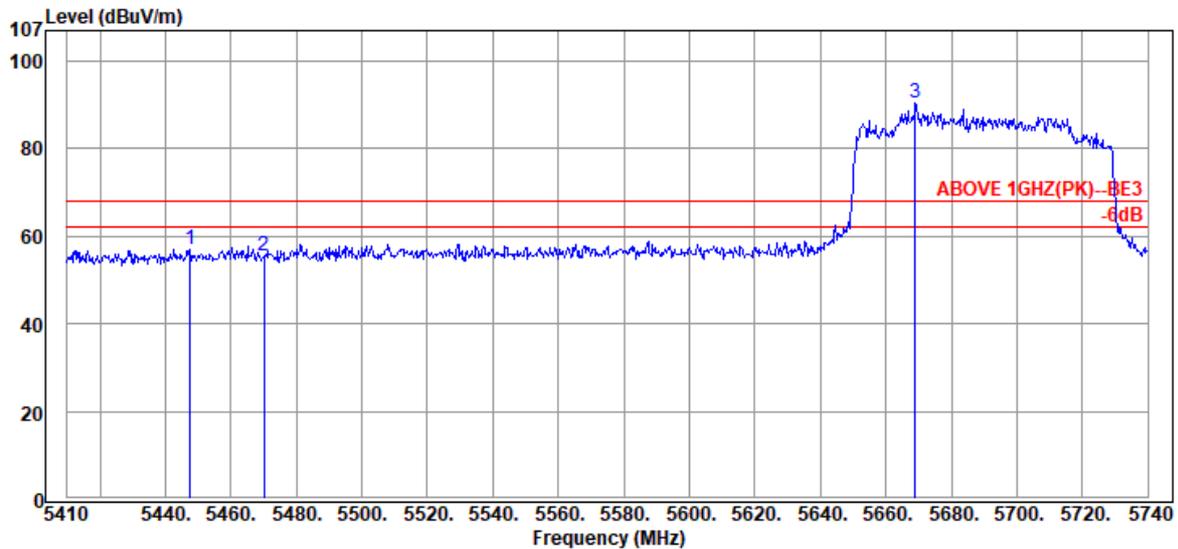

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.62	34.50	8.89	13.71	57.10	68.20	11.10	Peak
5470.06	34.50	8.91	12.01	55.42	68.20	12.78	Peak
@ 5669.05	34.52	9.01	46.75	90.28	---	---	Peak

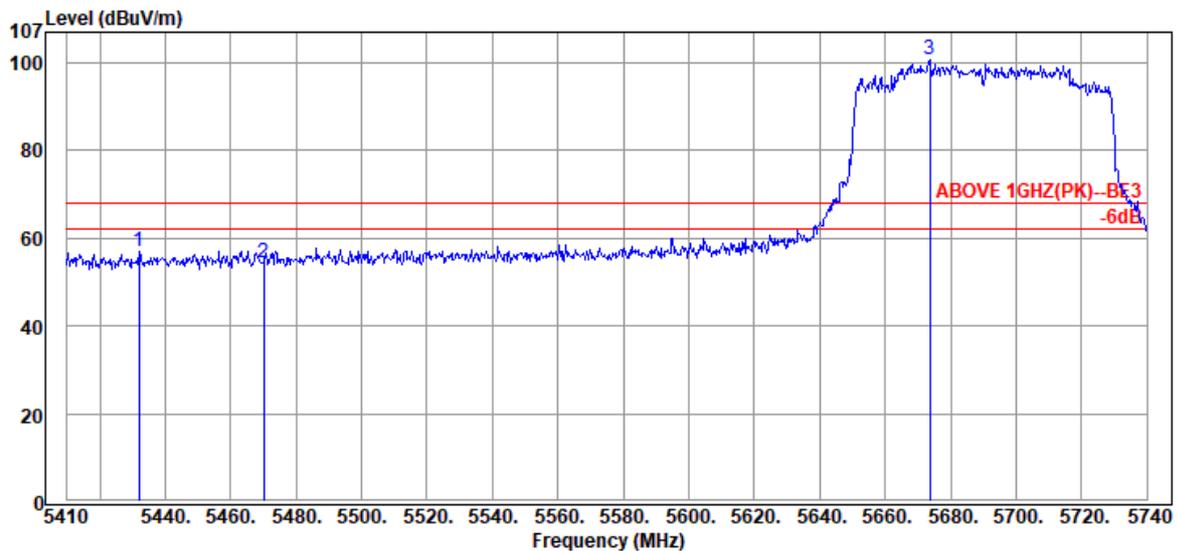


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.11	34.50	8.89	13.65	57.04	68.20	11.16	Peak
5470.06	34.50	8.91	11.13	54.54	68.20	13.66	Peak
@ 5673.67	34.51	9.01	57.29	100.81	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2C
		Frequency	TX 5690MHz

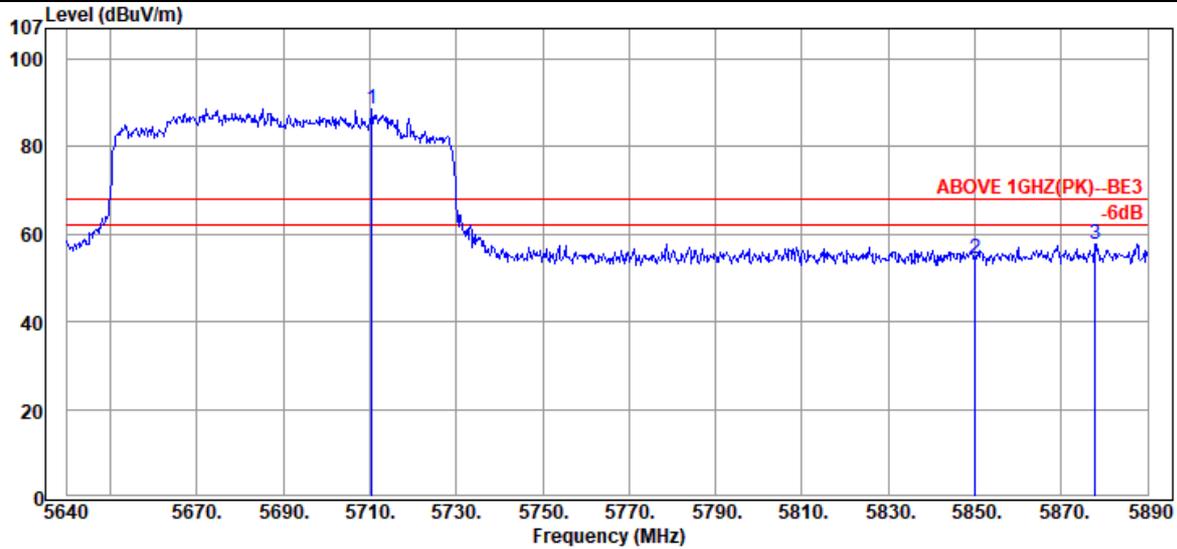

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5710.50	34.40	9.03	45.22	88.65	---	---	Peak
	5850.00	34.40	9.11	11.05	54.56	68.20	13.64	Peak
	5877.75	34.46	9.12	14.27	57.85	68.20	10.35	Peak

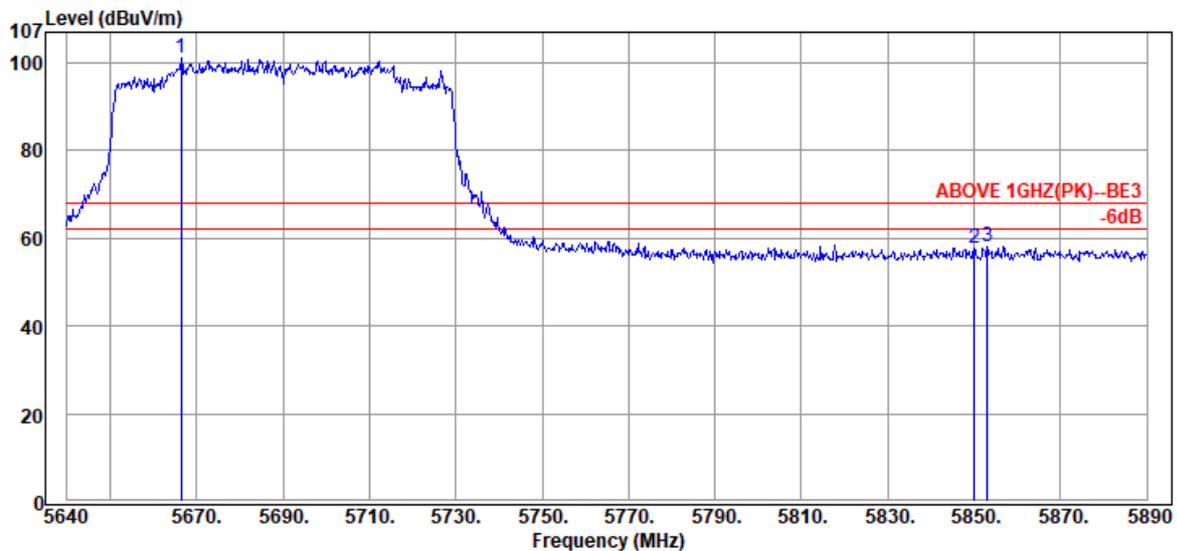


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5666.50	34.53	9.01	57.42	100.96	---	---	Peak
	5850.00	34.40	9.11	14.05	57.56	68.20	10.64	Peak
	5853.00	34.41	9.11	14.64	58.16	68.20	10.04	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-I & NII-2A
		Frequency	TX 5250MHz

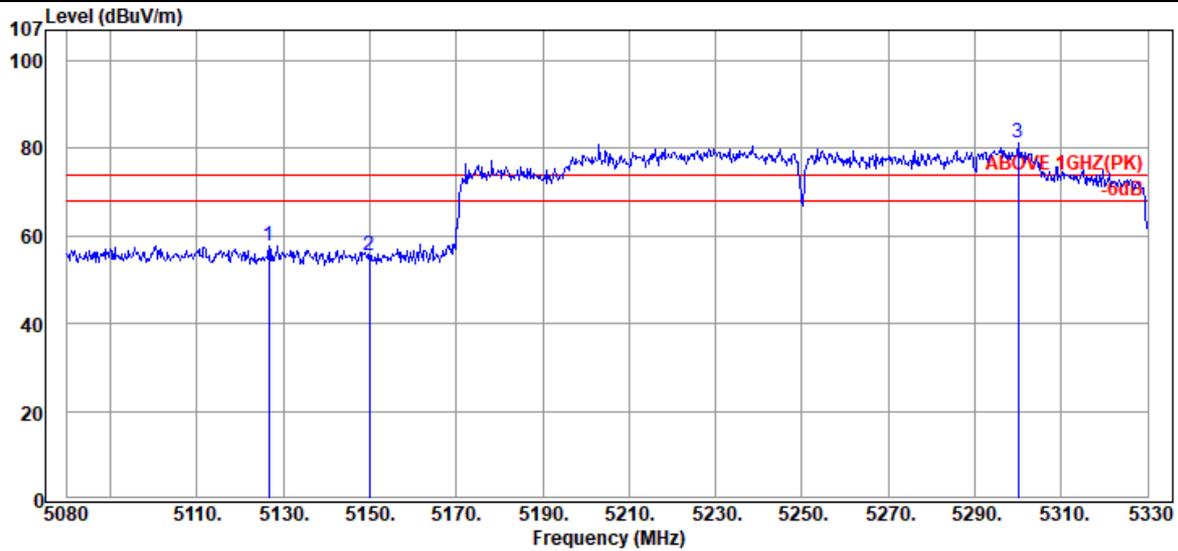

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.75	33.85	8.71	15.25	57.81	74.00	16.19	Peak
5150.00	33.90	8.73	13.03	55.66	74.00	18.34	Peak
@ 5300.00	34.50	8.81	37.84	81.15	---	---	Peak

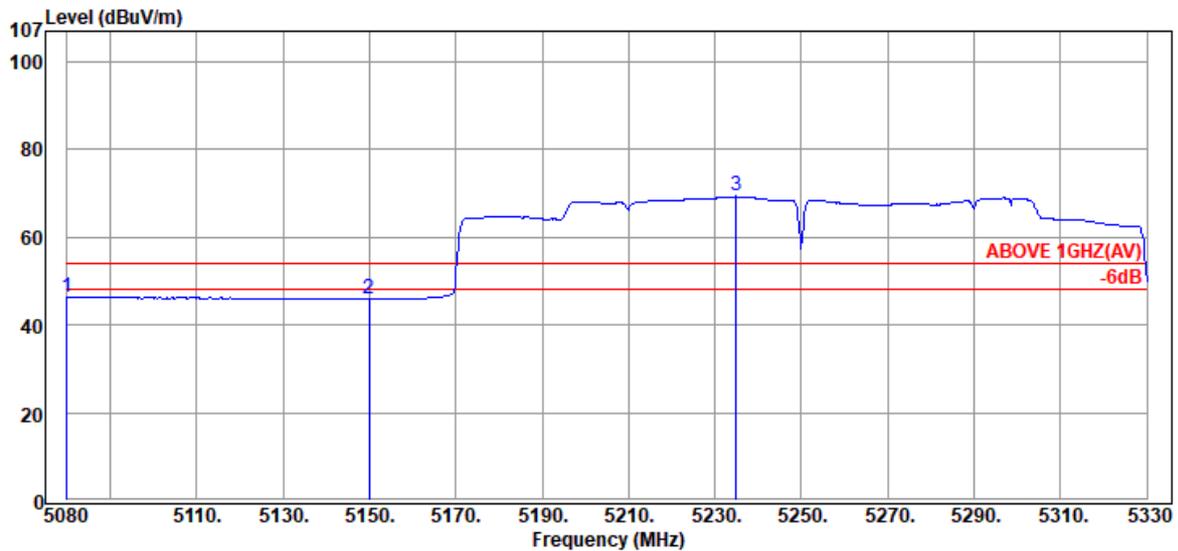


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.00	33.80	8.69	3.75	46.24	54.00	7.76	Average
5150.00	33.90	8.73	3.27	45.90	54.00	8.10	Average
@ 5235.00	34.31	8.78	26.24	69.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-I & NII-2A
		Frequency	TX 5250MHz

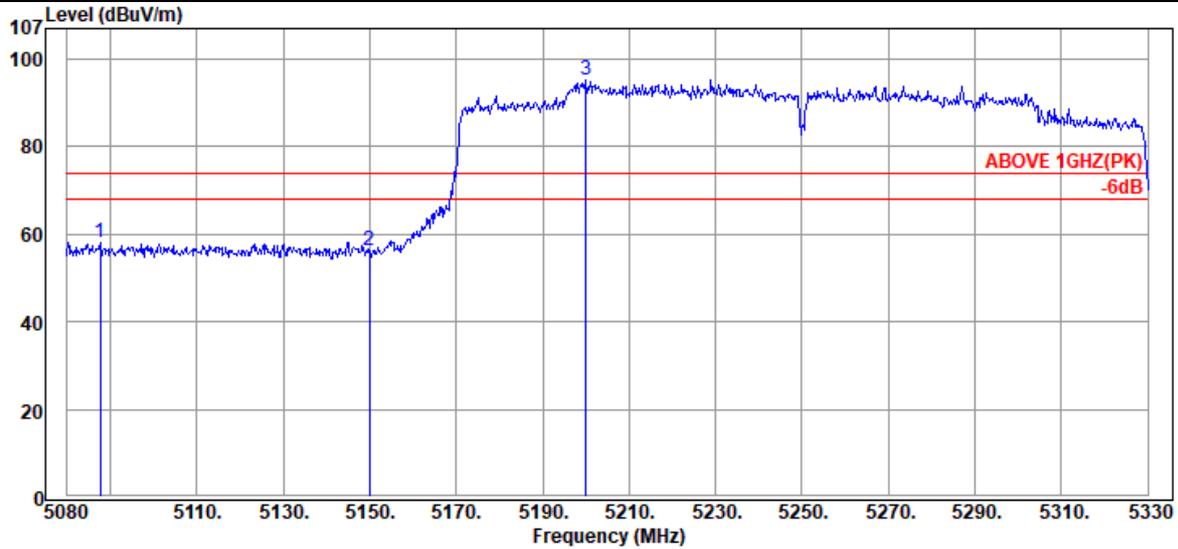

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5087.75	33.80	8.69	15.67	58.16	74.00	15.84	Peak
5150.00	33.90	8.73	13.58	56.21	74.00	17.79	Peak
@ 5200.00	34.10	8.76	52.33	95.19	---	---	Peak

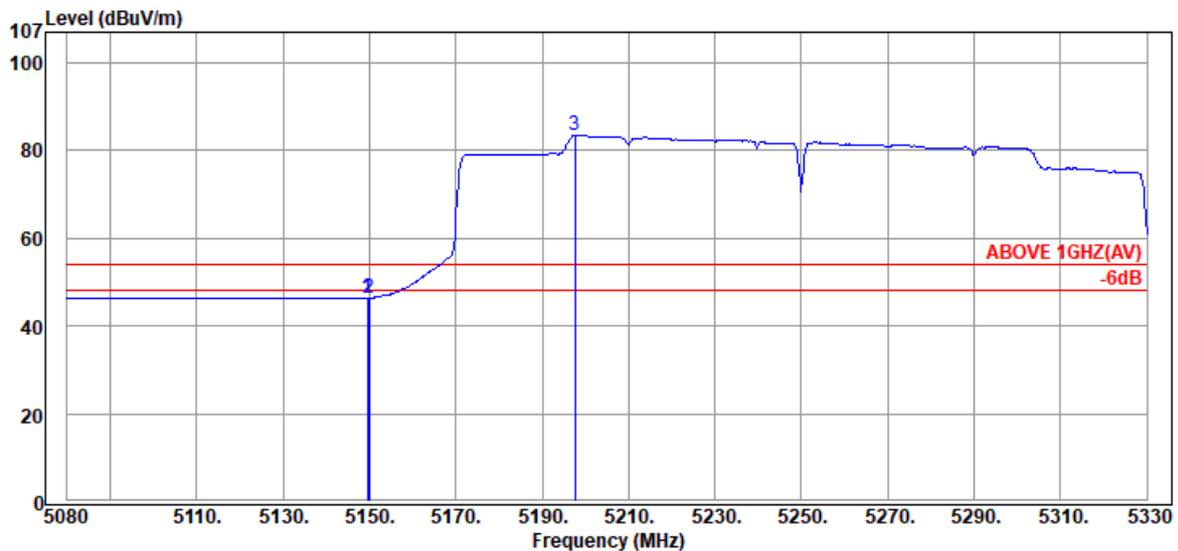


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	33.90	8.73	3.84	46.47	54.00	7.53	Average
5150.00	33.90	8.73	3.82	46.45	54.00	7.55	Average
@ 5197.50	34.09	8.75	40.58	83.42	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-I & NII-2A
		Frequency	TX 5250MHz

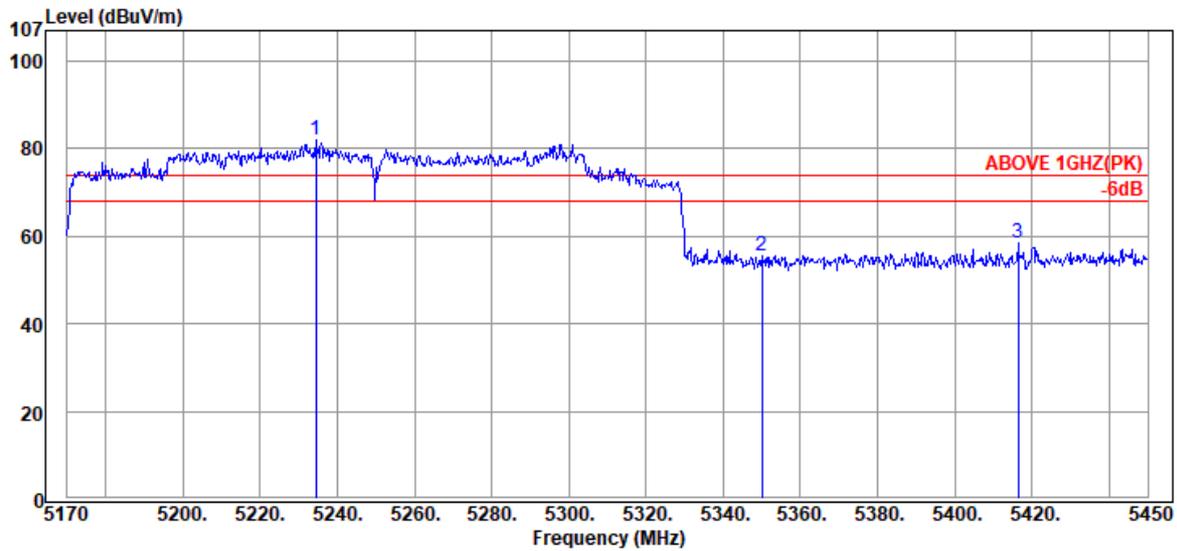

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5234.40	34.31	8.78	38.87	81.96	---	---	Peak
	5350.04	34.50	8.84	12.07	55.41	74.00	18.59	Peak
	5416.40	34.50	8.88	15.25	58.63	74.00	15.37	Peak

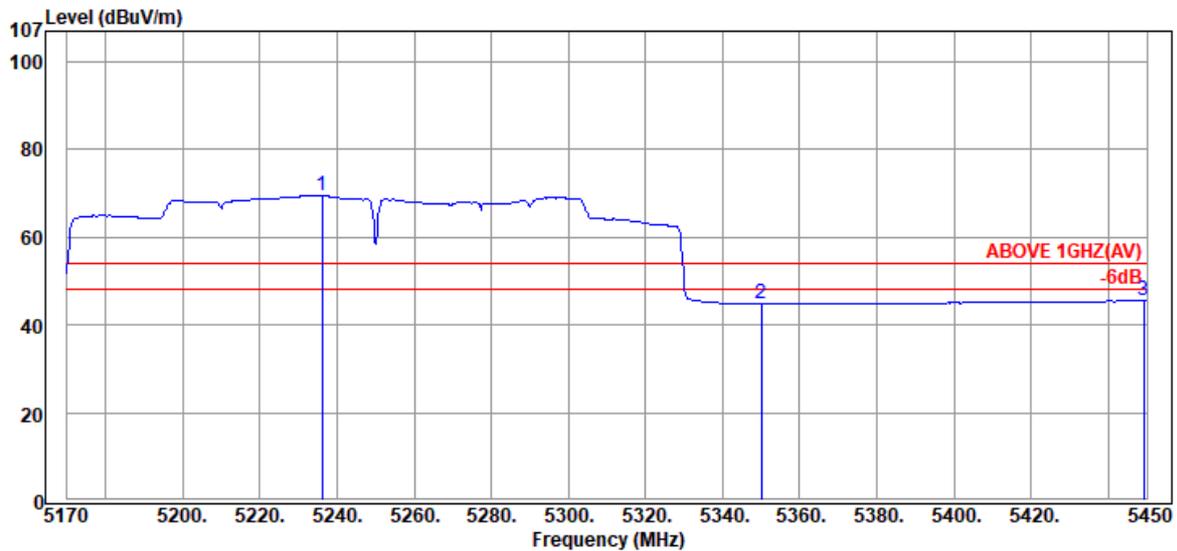


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5236.08	34.32	8.78	26.43	69.53	---	---	Average
	5350.04	34.50	8.84	1.53	44.87	54.00	9.13	Average
	5449.16	34.50	8.89	2.15	45.54	54.00	8.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII- I & NII-2A
		Frequency	TX 5250MHz

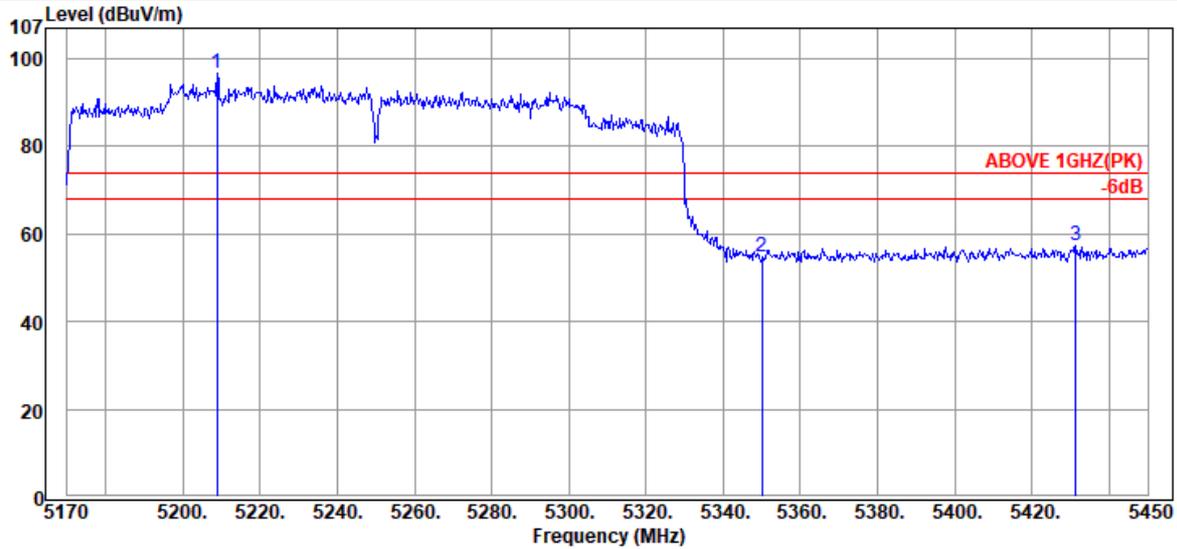

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5208.92	34.15	8.76	53.86	96.77	---	---	Peak
	5350.04	34.50	8.84	11.60	54.94	74.00	19.06	Peak
	5431.24	34.50	8.89	14.07	57.46	74.00	16.54	Peak

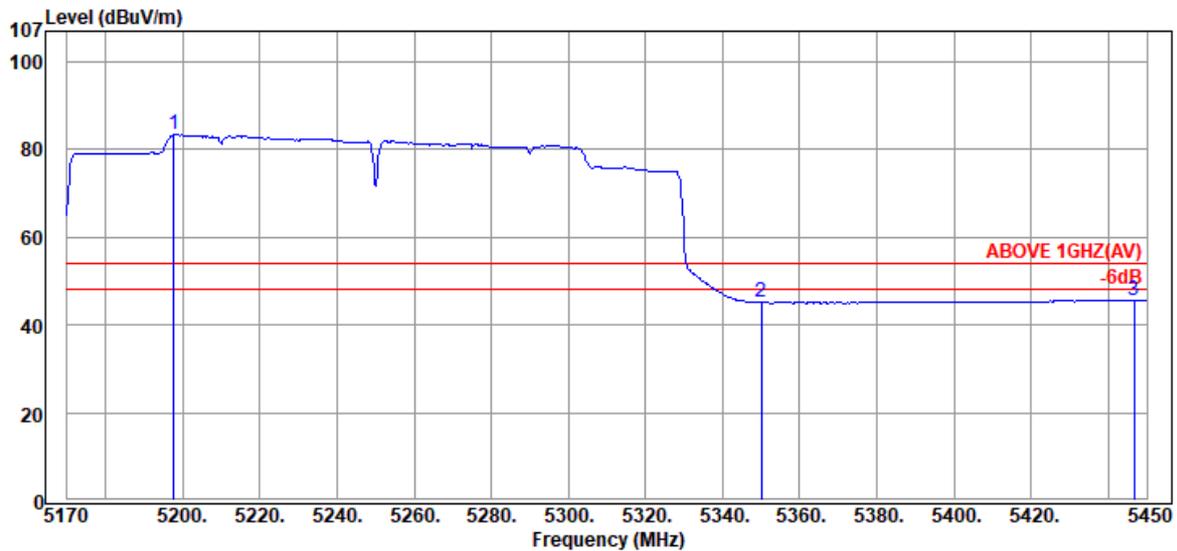


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5197.72	34.09	8.75	40.58	83.42	---	---	Average
	5350.04	34.50	8.84	1.77	45.11	54.00	8.89	Average
	5446.64	34.50	8.89	2.23	45.62	54.00	8.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
		Frequency	TX 5570MHz

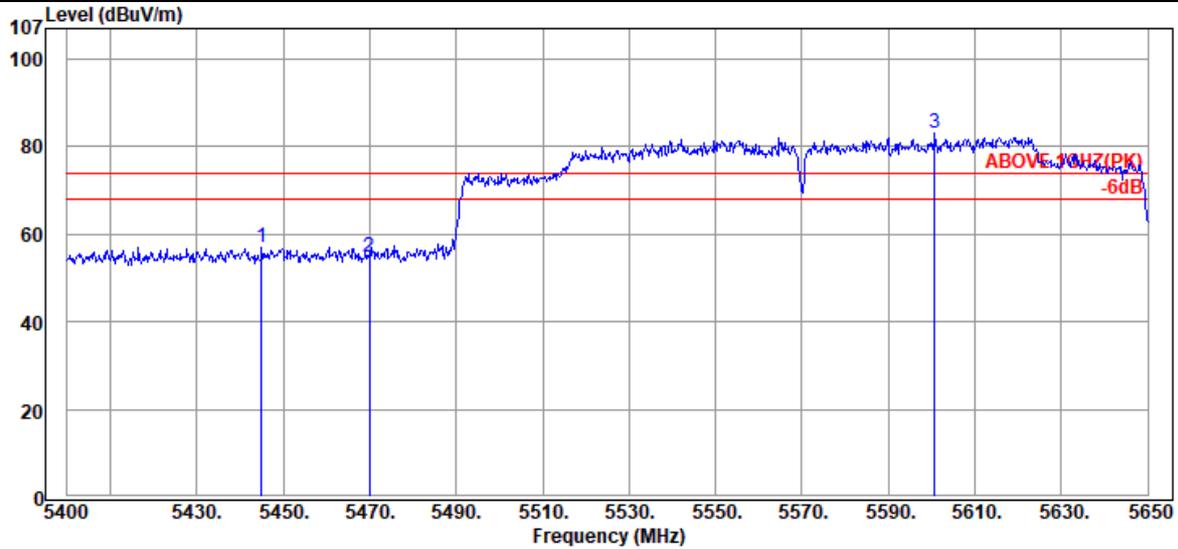

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.00	34.50	8.89	13.74	57.13	74.00	16.87	Peak
5470.00	34.50	8.91	11.48	54.89	74.00	19.11	Peak
@ 5600.75	34.70	8.98	39.32	83.00	---	---	Peak

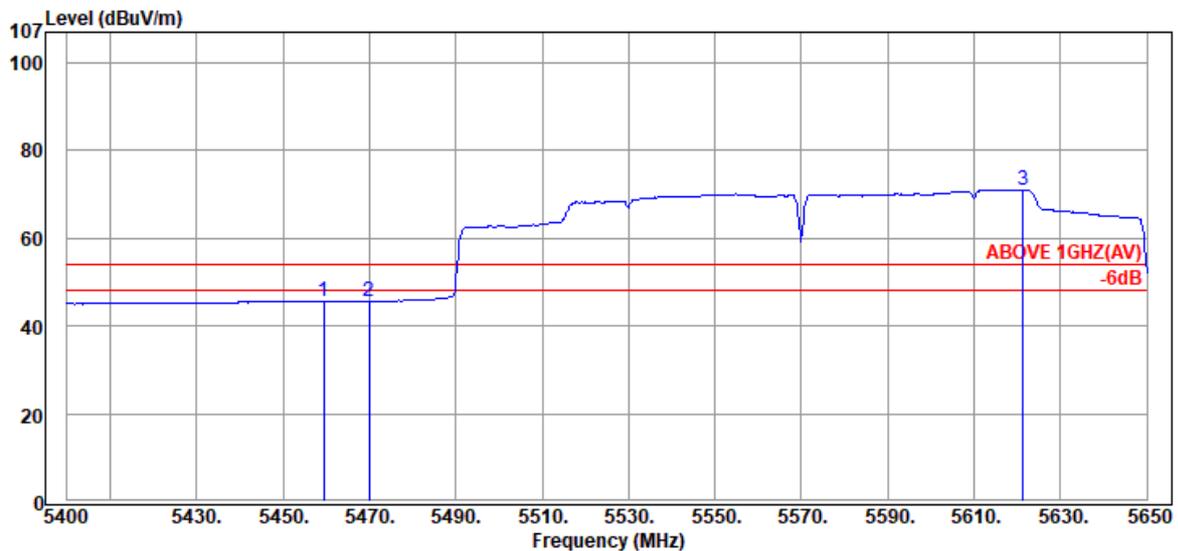


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.50	34.50	8.90	2.23	45.63	54.00	8.37	Average
5470.00	34.50	8.91	2.28	45.69	54.00	8.31	Average
@ 5621.25	34.66	8.99	27.39	71.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
		Frequency	TX 5570MHz

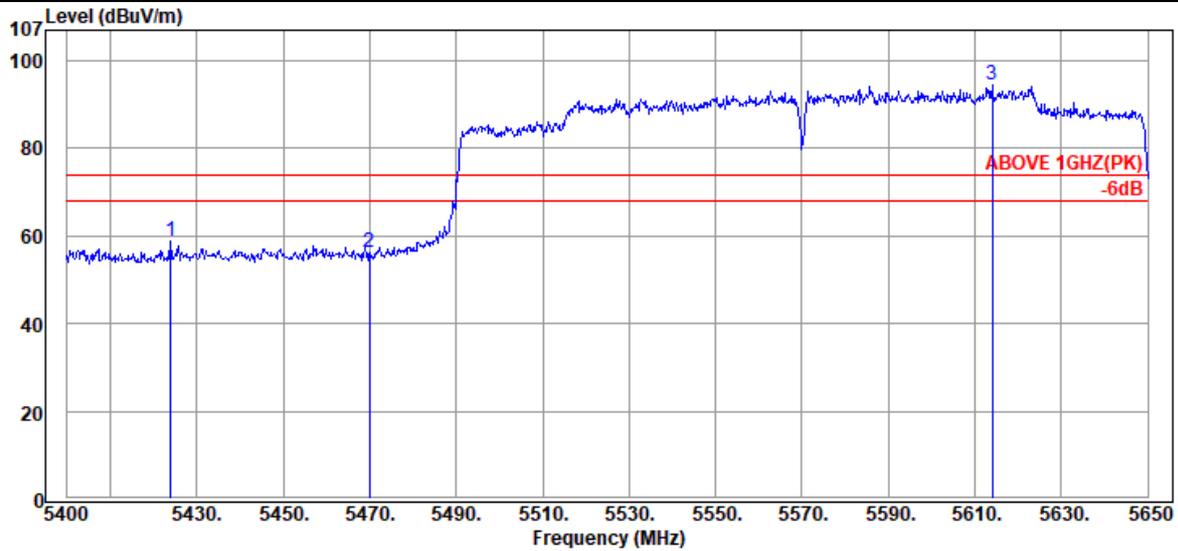

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.00	34.50	8.88	15.33	58.71	74.00	15.29	Peak
5470.00	34.50	8.91	12.84	56.25	74.00	17.75	Peak
@ 5614.00	34.67	8.98	50.78	94.43	---	---	Peak

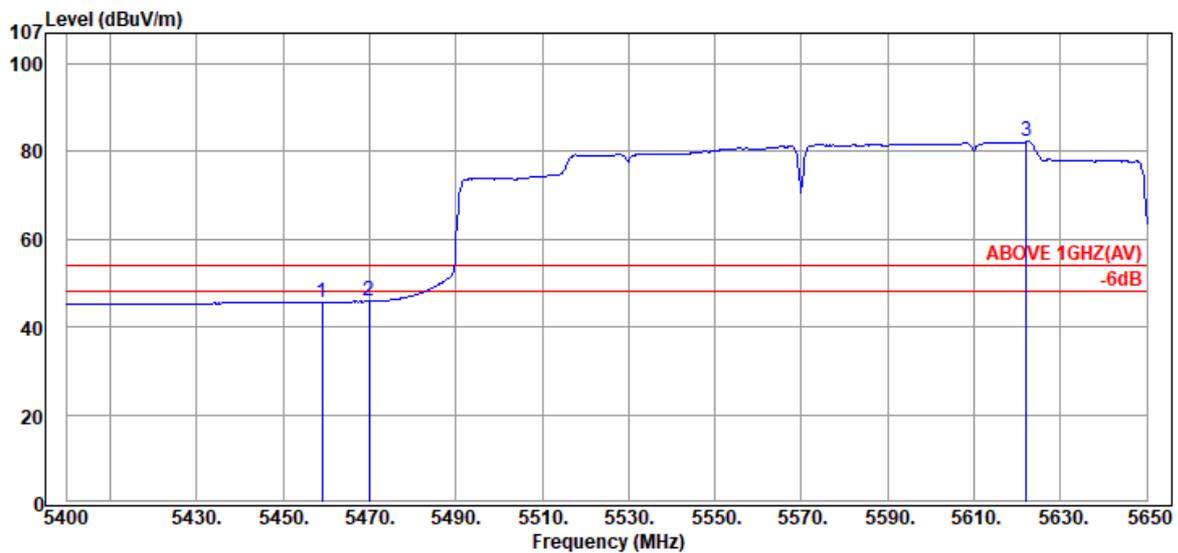


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.00	34.50	8.90	2.30	45.70	54.00	8.30	Average
5470.00	34.50	8.91	2.40	45.81	54.00	8.19	Average
@ 5622.00	34.66	8.99	38.62	82.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
		Frequency	TX 5570MHz

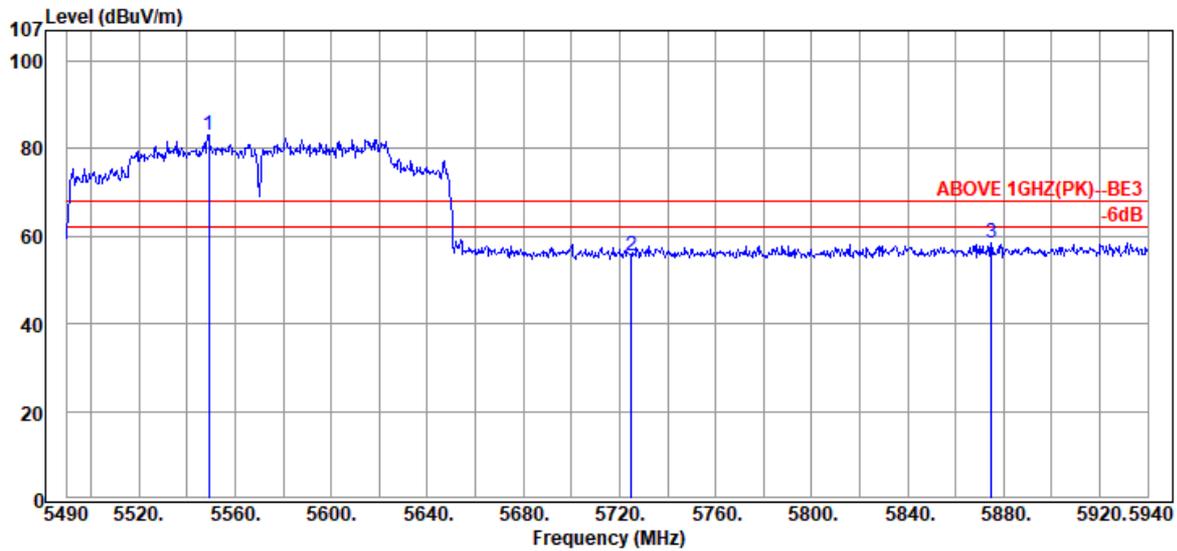

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5548.95	34.60	8.95	39.68	83.23	---	---	Peak
	5724.90	34.40	9.04	11.91	55.35	68.20	12.85	Peak
	5874.75	34.45	9.12	14.83	58.40	68.20	9.80	Peak

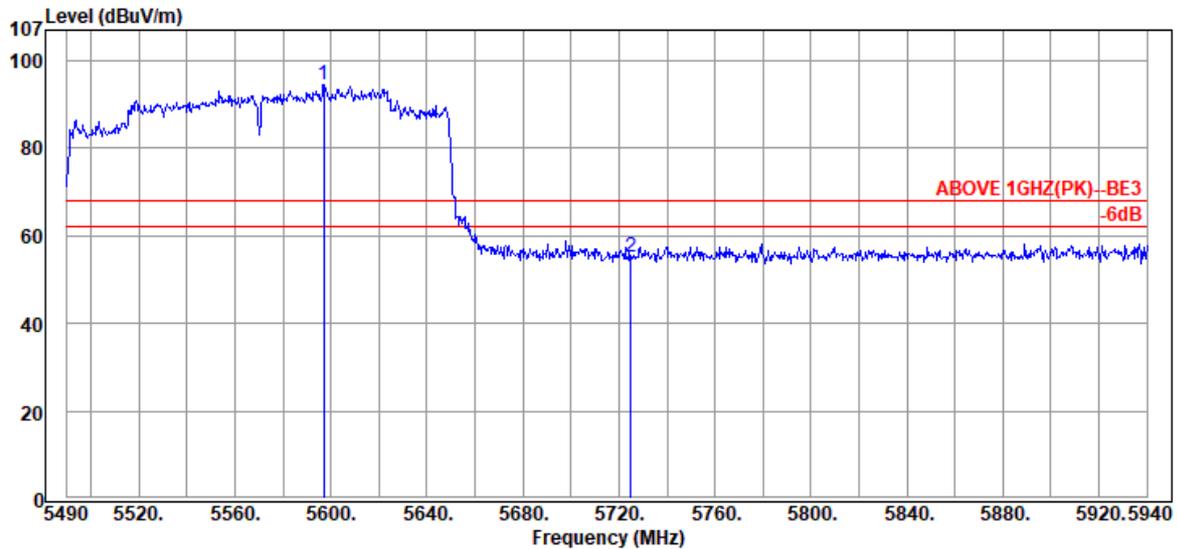


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5597.10	34.69	8.97	50.81	94.47	---	---	Peak
	5724.90	34.40	9.04	11.60	55.04	68.20	13.16	Peak
	5940.00	34.74	9.15	14.22	58.11	68.20	10.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

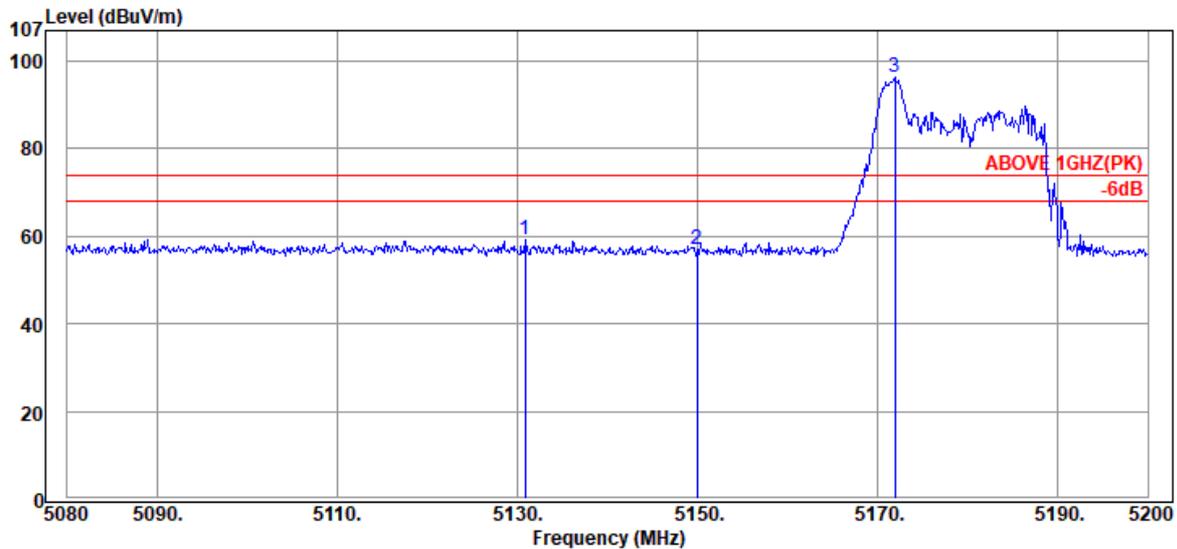

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.88	33.86	8.72	16.76	59.34	74.00	14.66	Peak
5149.96	33.90	8.73	14.50	57.13	74.00	16.87	Peak
@ 5171.92	33.99	8.74	53.49	96.22	---	---	Peak

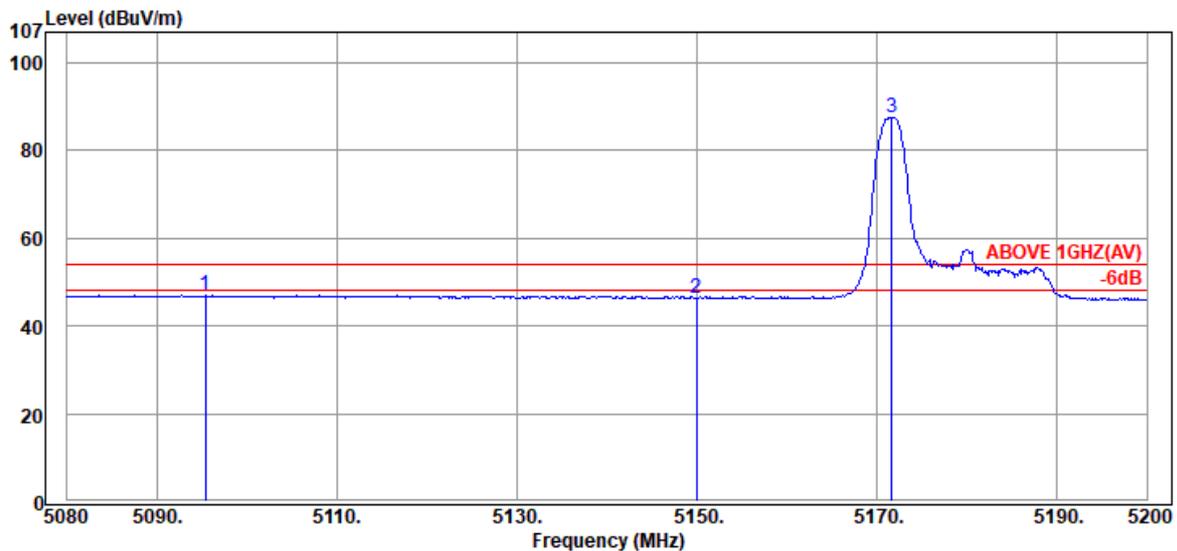


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5095.36	33.80	8.70	4.55	47.05	54.00	6.95	Average
5149.96	33.90	8.73	3.80	46.43	54.00	7.57	Average
@ 5171.68	33.99	8.74	44.96	87.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

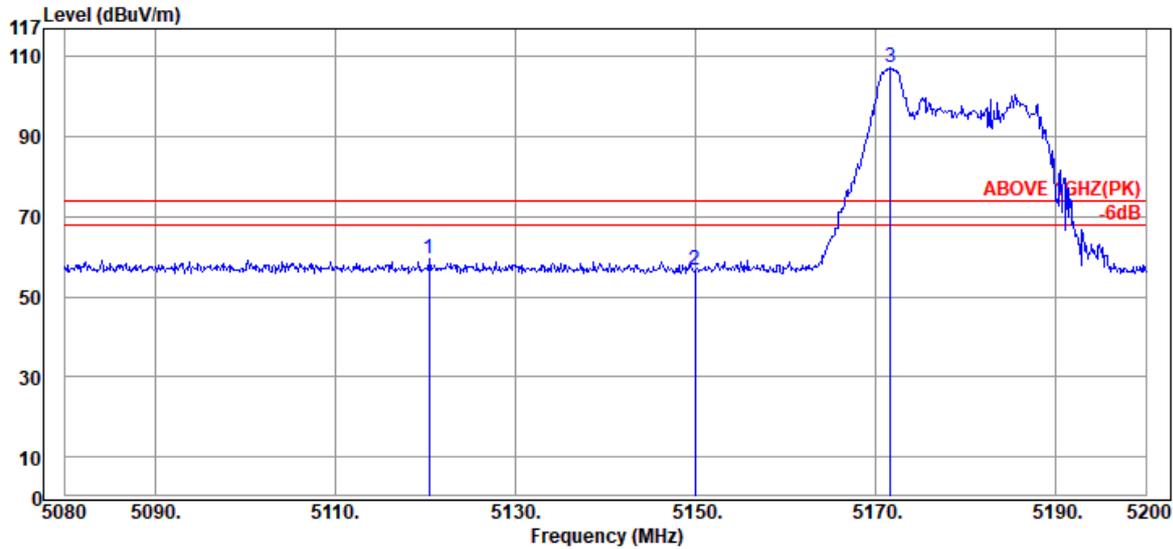

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.44	33.84	8.71	16.89	59.44	74.00	14.56	Peak
5149.96	33.90	8.73	14.10	56.73	74.00	17.27	Peak
@ 5171.68	33.99	8.74	64.72	107.45	---	---	Peak

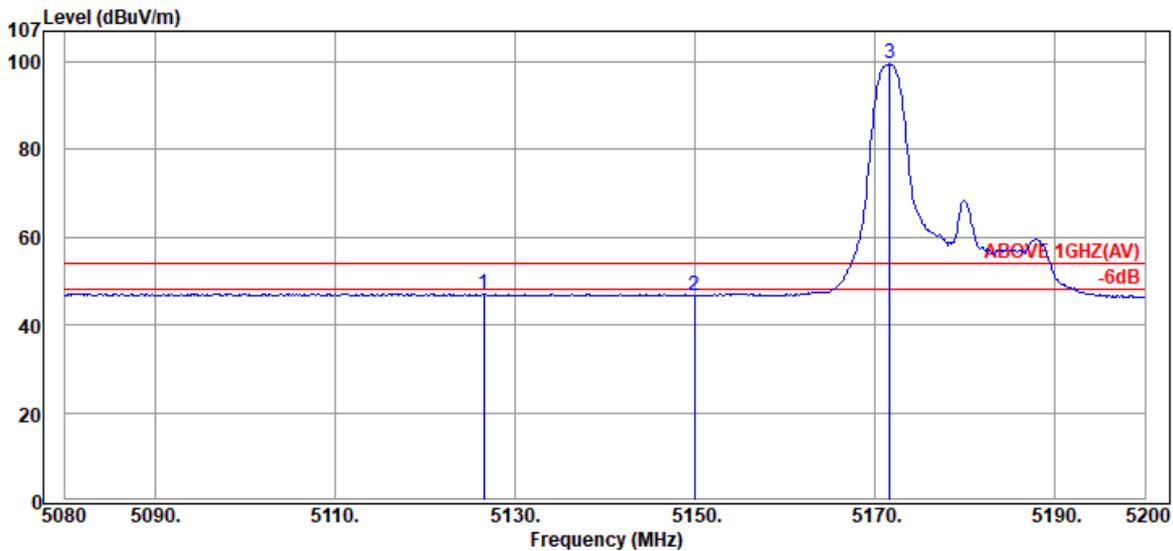


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.56	33.85	8.71	4.62	47.18	54.00	6.82	Average
5149.96	33.90	8.73	4.00	46.63	54.00	7.37	Average
@ 5171.68	33.99	8.74	56.75	99.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

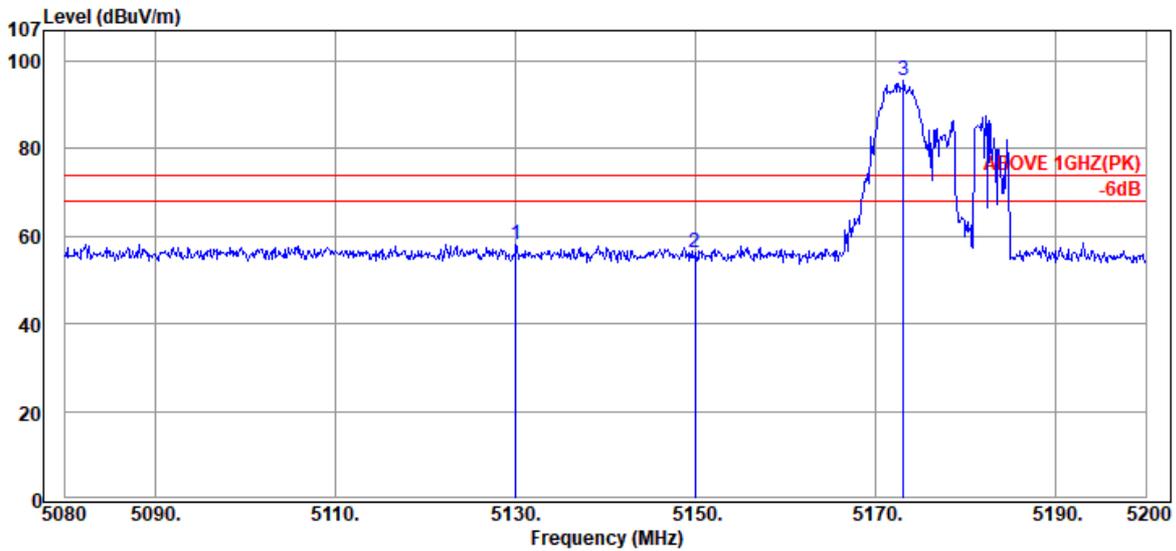

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.04	33.86	8.72	15.59	58.17	74.00	15.83	Peak
5149.96	33.90	8.73	13.81	56.44	74.00	17.56	Peak
@ 5173.12	33.99	8.74	52.89	95.62	---	---	Peak

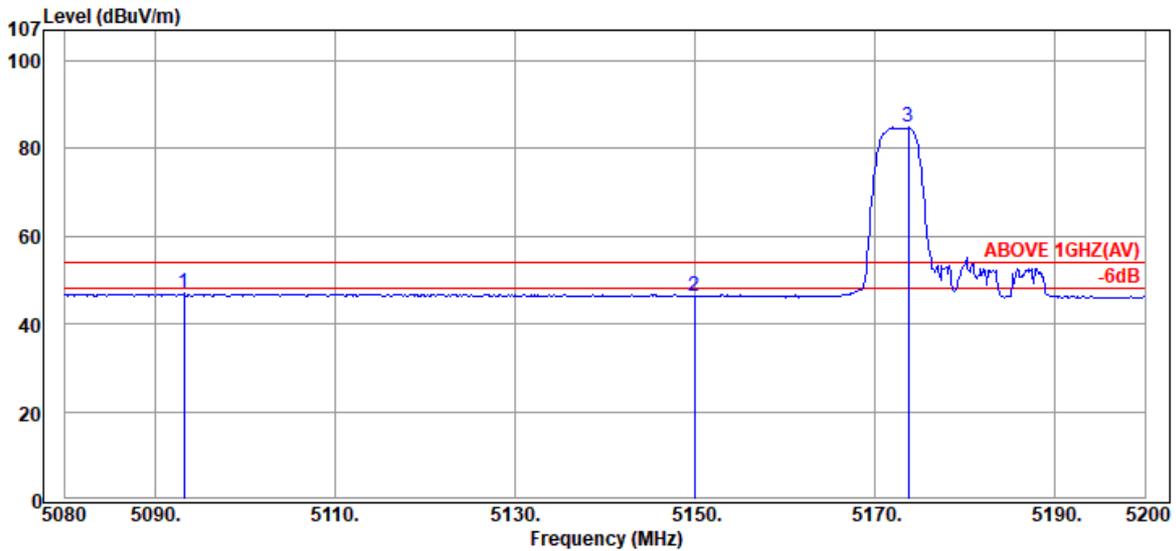


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5093.20	33.80	8.69	4.43	46.92	54.00	7.08	Average
5149.96	33.90	8.73	3.69	46.32	54.00	7.68	Average
@ 5173.72	33.99	8.74	42.05	84.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

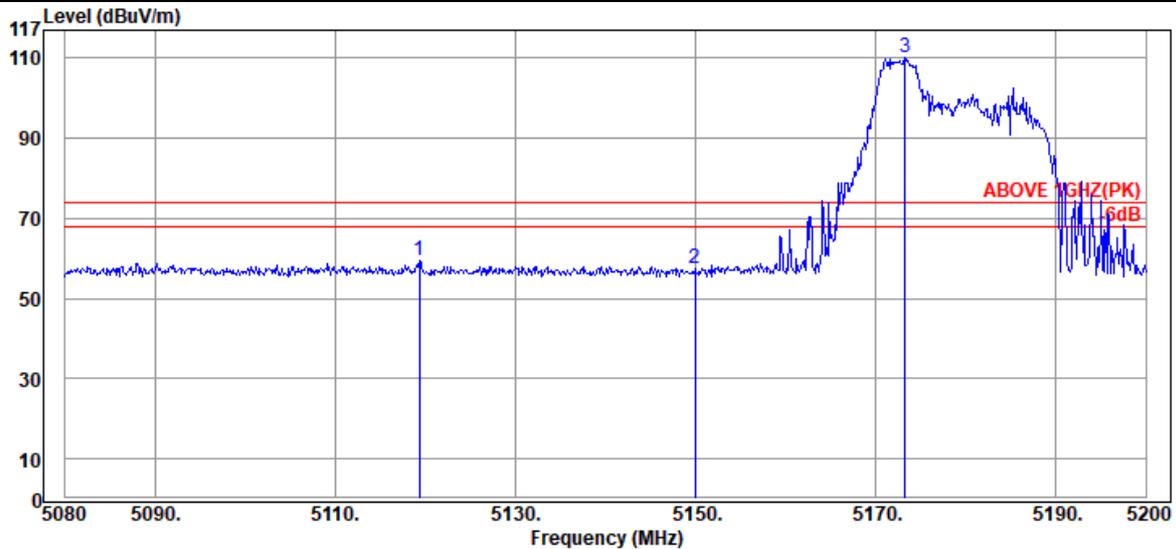

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.36	33.84	8.71	16.80	59.35	74.00	14.65	Peak
5149.96	33.90	8.73	14.68	57.31	74.00	16.69	Peak
@ 5173.24	33.99	8.74	67.30	110.03	---	---	Peak

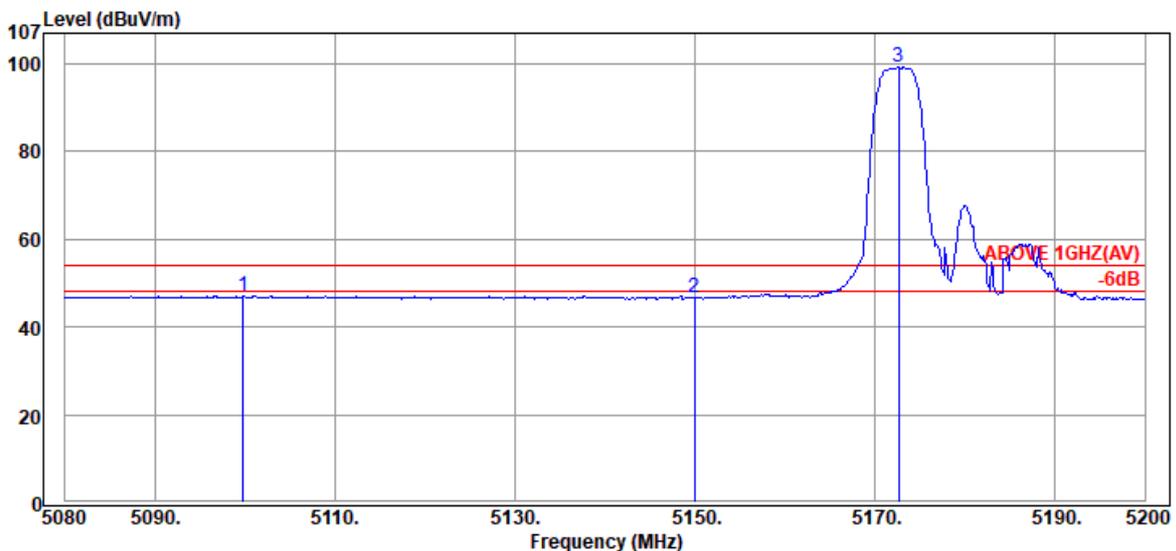


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5099.80	33.80	8.70	4.54	47.04	54.00	6.96	Average
5149.96	33.90	8.73	4.01	46.64	54.00	7.36	Average
@ 5172.64	33.99	8.74	56.52	99.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

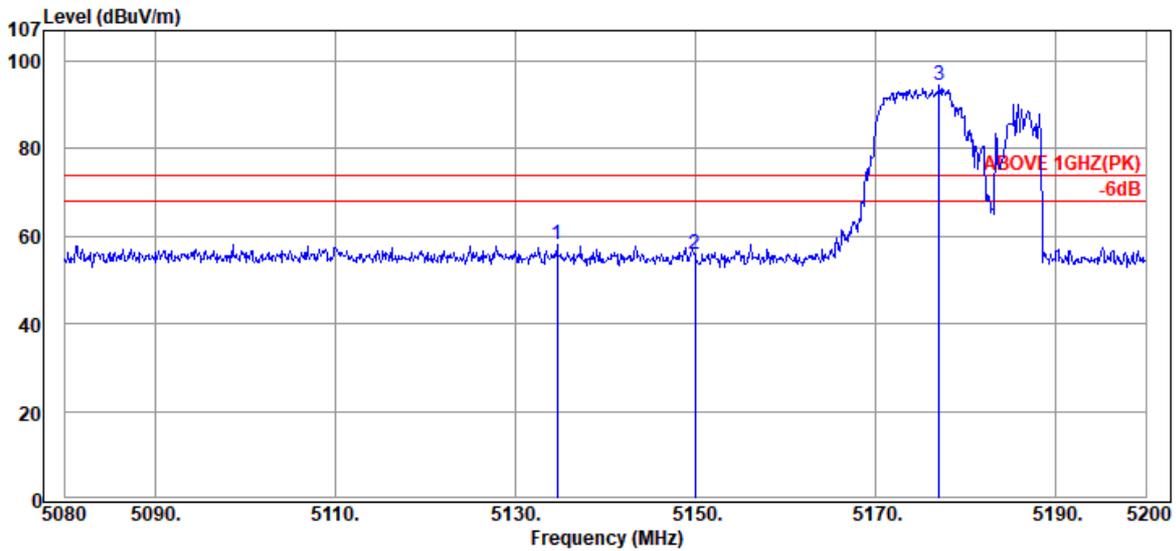

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.60	33.87	8.72	15.66	58.25	74.00	15.75	Peak
5149.96	33.90	8.73	13.27	55.90	74.00	18.10	Peak
@ 5177.08	34.01	8.74	51.92	94.67	---	---	Peak

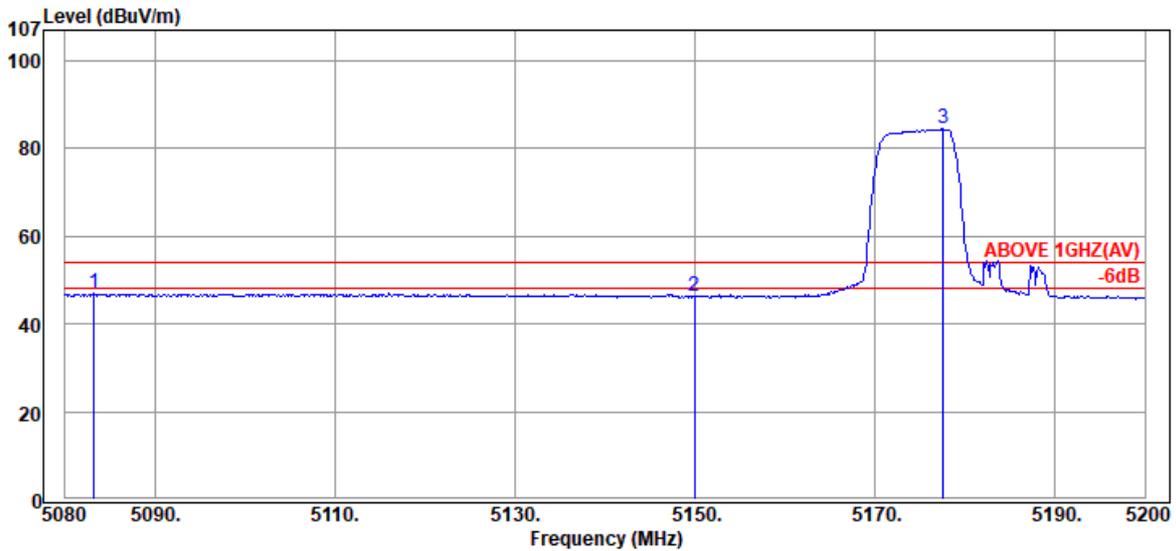


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5083.24	33.80	8.69	4.48	46.97	54.00	7.03	Average
5149.96	33.90	8.73	3.69	46.32	54.00	7.68	Average
@ 5177.56	34.01	8.74	41.68	84.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

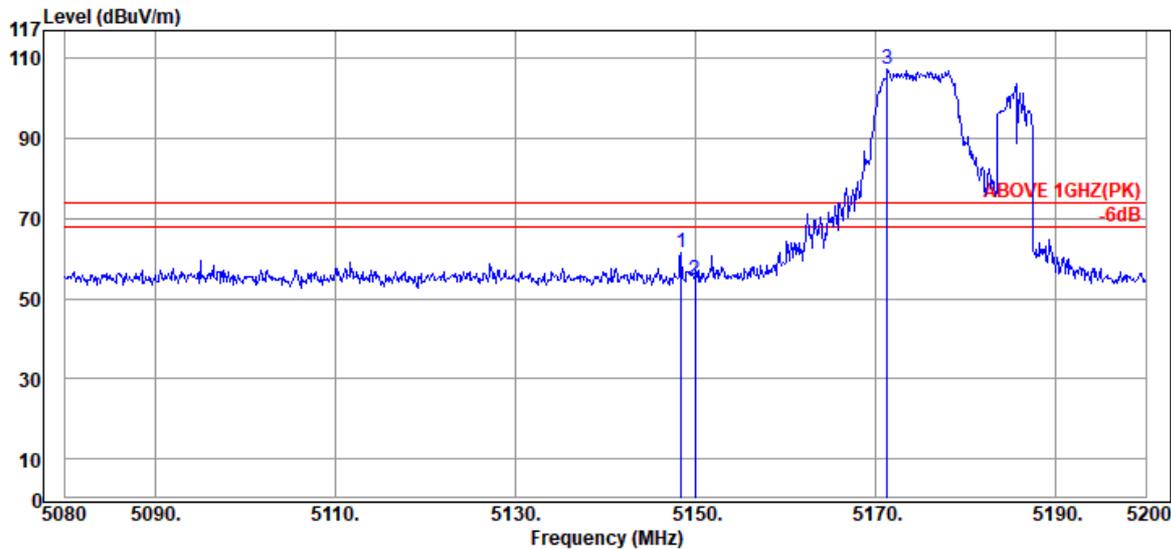

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.40	33.90	8.73	18.69	61.32	74.00	12.68	Peak
5149.96	33.90	8.73	12.00	54.63	74.00	19.37	Peak
@ 5171.32	33.99	8.74	64.58	107.31	---	---	Peak

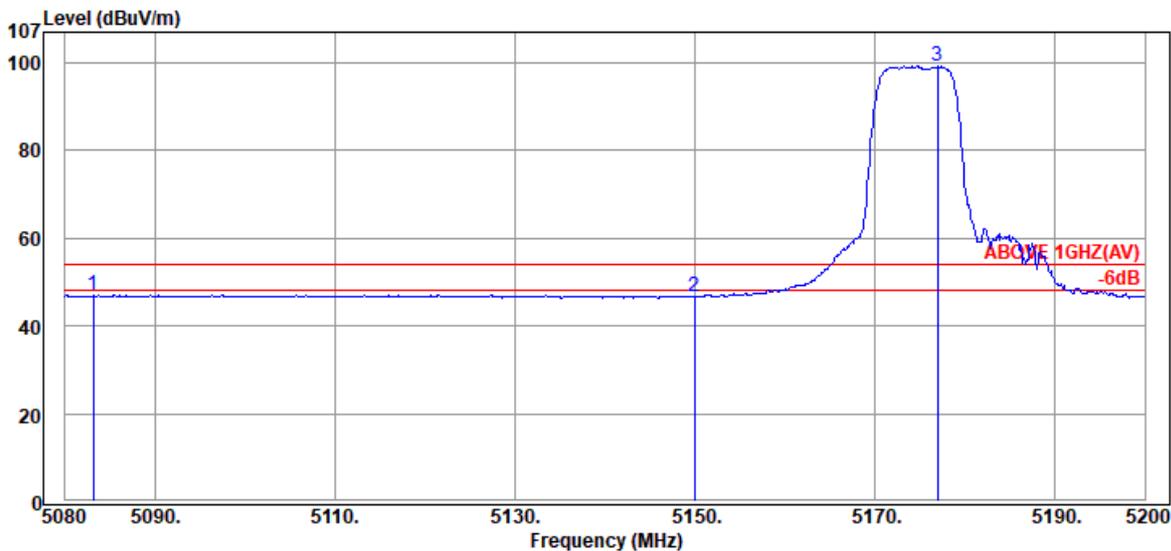


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5083.12	33.80	8.69	4.63	47.12	54.00	6.88	Average
5149.96	33.90	8.73	4.05	46.68	54.00	7.32	Average
@ 5176.96	34.01	8.74	56.45	99.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

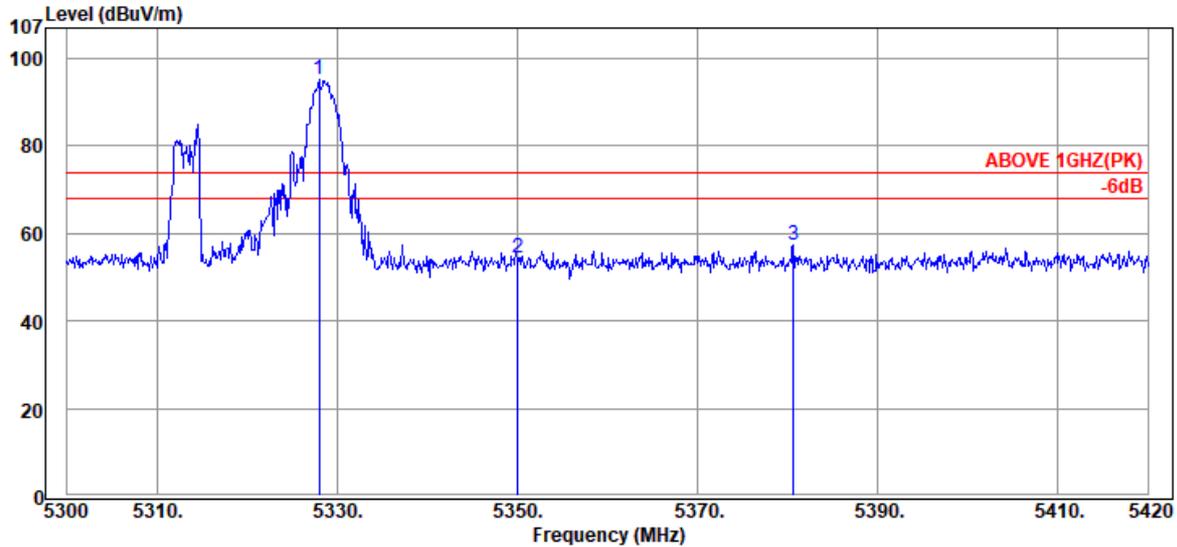

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.96	34.50	8.83	51.75	95.08	---	---	Peak
5350.04	34.50	8.84	11.13	54.47	74.00	19.53	Peak
5380.64	34.50	8.86	13.83	57.19	74.00	16.81	Peak

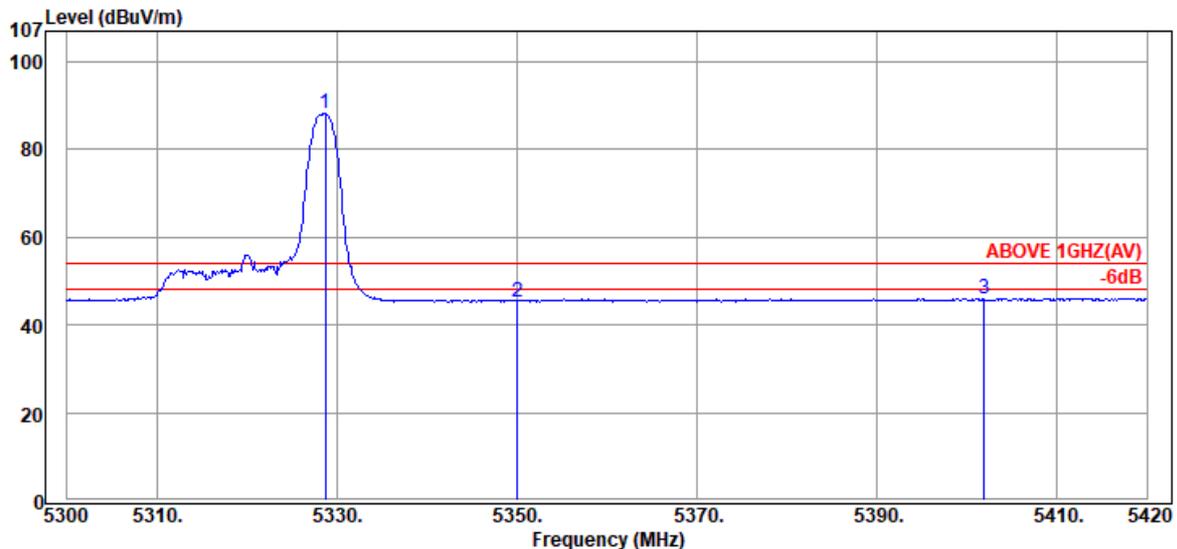


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.68	34.50	8.83	44.79	88.12	---	---	Average
5350.04	34.50	8.84	2.07	45.41	54.00	8.59	Average
5401.88	34.50	8.87	2.72	46.09	54.00	7.91	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

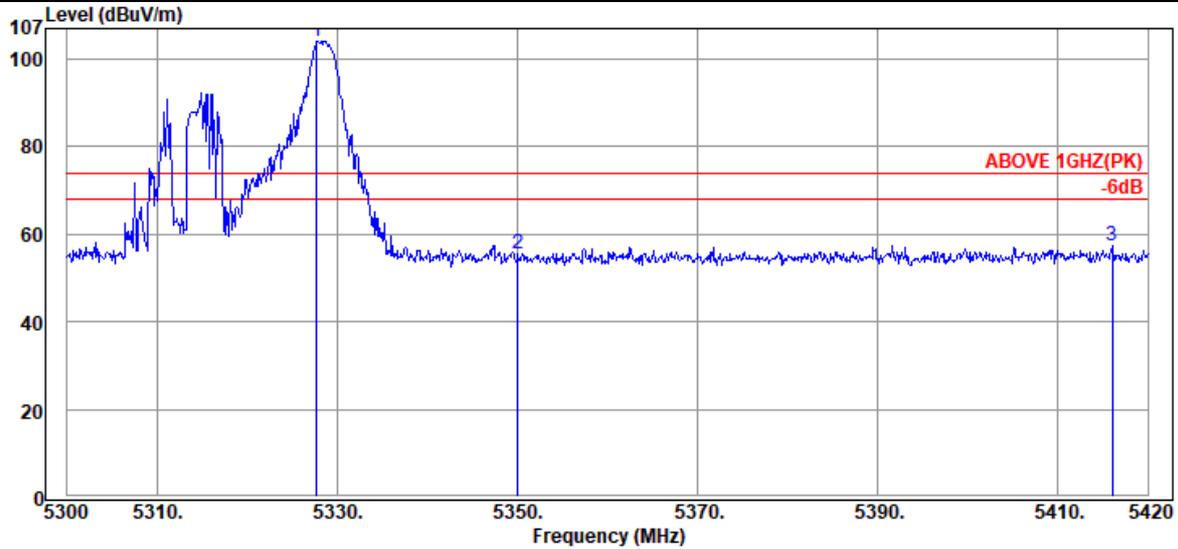

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.72	34.50	8.83	60.82	104.15	---	---	Peak
	5350.04	34.50	8.84	12.16	55.50	74.00	18.50	Peak
	5416.04	34.50	8.88	13.96	57.34	74.00	16.66	Peak

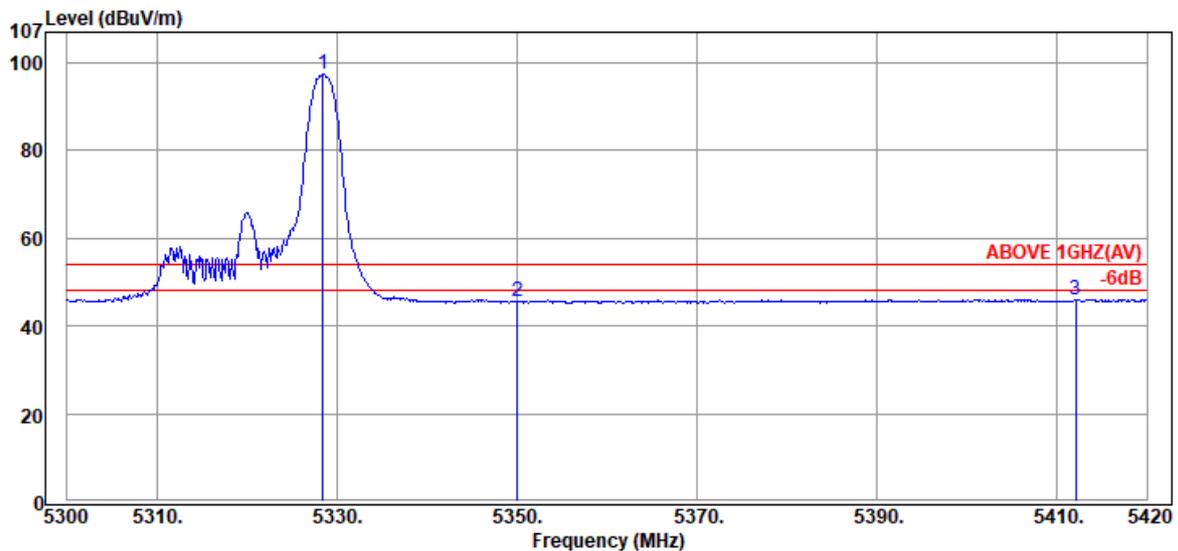


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.44	34.50	8.83	53.98	97.31	---	---	Average
	5350.04	34.50	8.84	2.38	45.72	54.00	8.28	Average
	5412.08	34.50	8.87	2.75	46.12	54.00	7.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

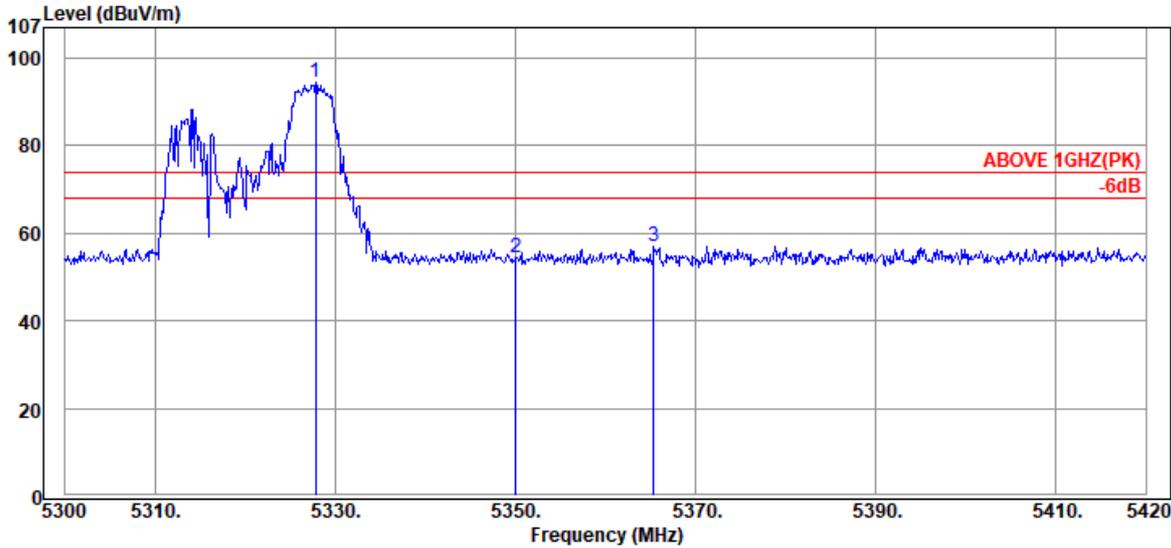

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.84	34.50	8.83	51.04	94.37	---	---	Peak
	5350.04	34.50	8.84	11.22	54.56	74.00	19.44	Peak
	5365.40	34.50	8.85	13.54	56.89	74.00	17.11	Peak

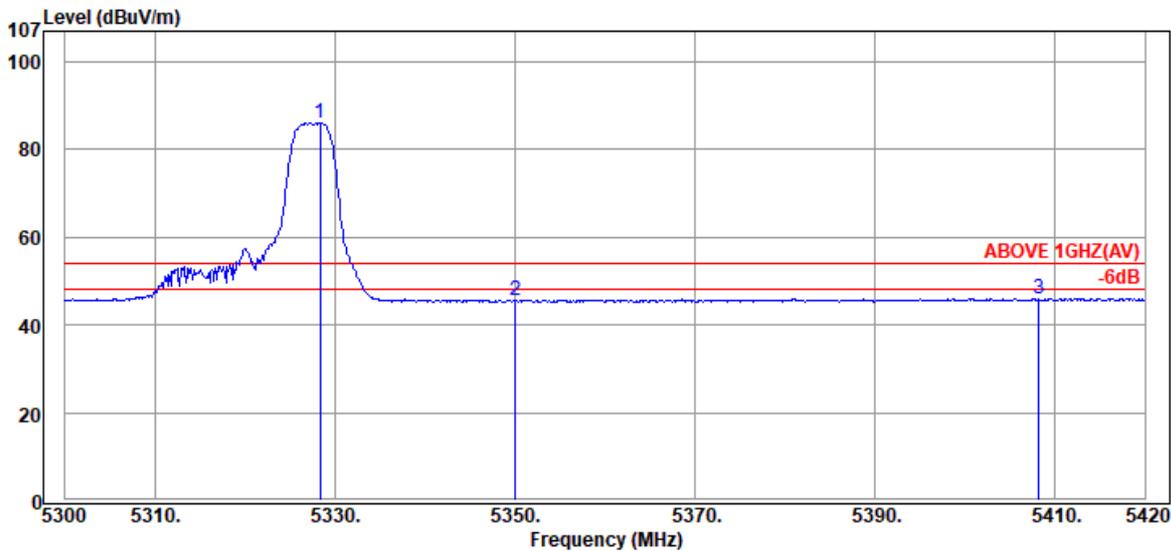


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.32	34.50	8.83	42.78	86.11	---	---	Average
	5350.04	34.50	8.84	2.18	45.52	54.00	8.48	Average
	5408.24	34.50	8.87	2.70	46.07	54.00	7.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

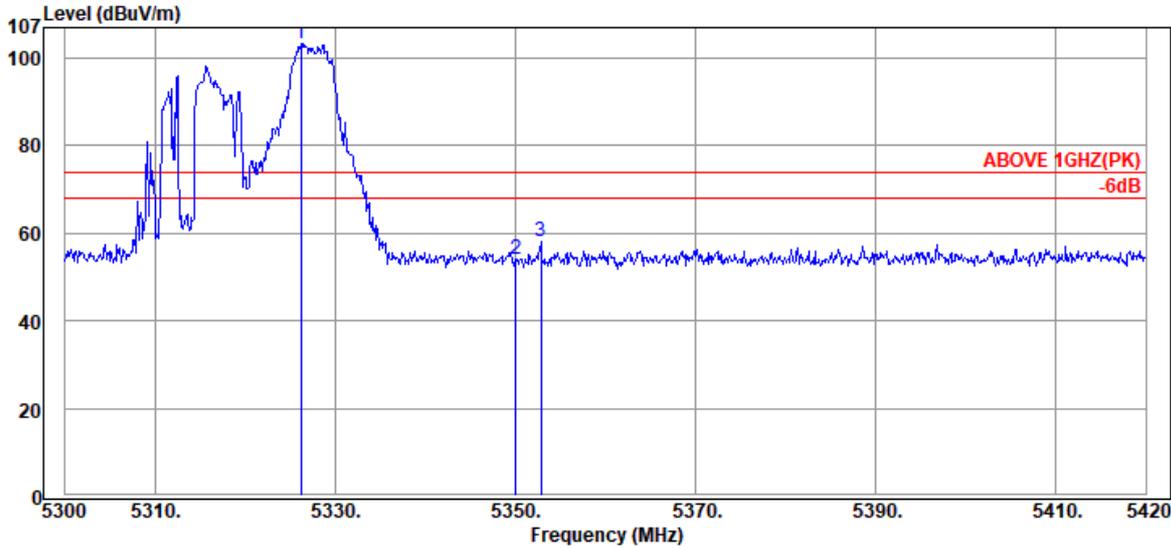

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
@	5326.16	34.50	8.83	59.98	103.31	---	---	Peak
	5350.04	34.50	8.84	10.63	53.97	74.00	20.03	Peak
	5352.80	34.50	8.84	14.58	57.92	74.00	16.08	Peak

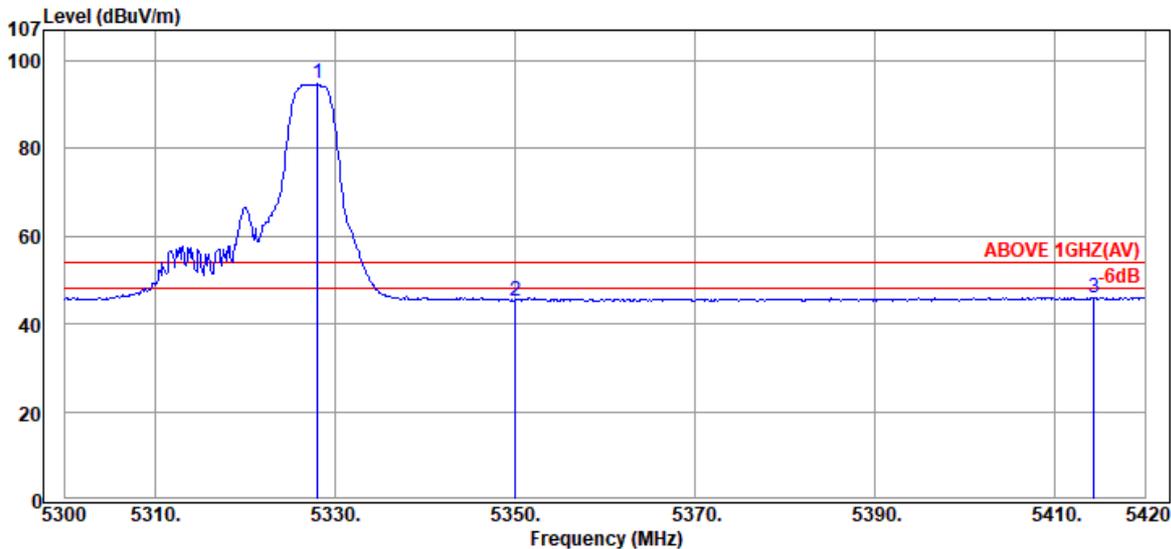


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
@	5328.08	34.50	8.83	51.38	94.71	---	---	Average
	5350.04	34.50	8.84	1.94	45.28	54.00	8.72	Average
	5414.36	34.50	8.88	2.74	46.12	54.00	7.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

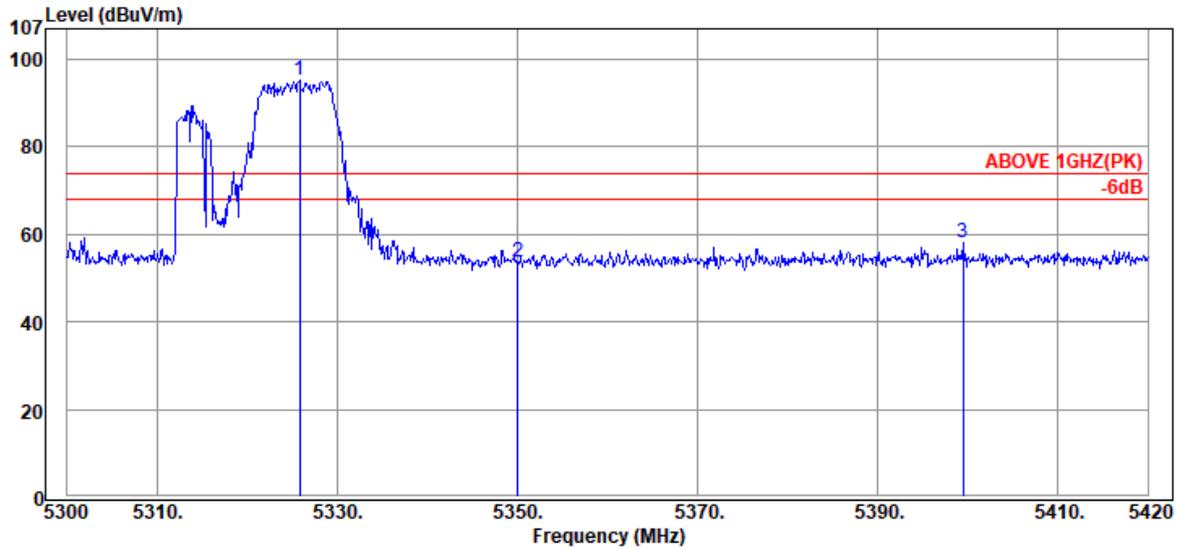

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5325.80	34.50	8.83	51.94	95.27	---	---	Peak
	5350.04	34.50	8.84	10.17	53.51	74.00	20.49	Peak
	5399.48	34.50	8.87	14.73	58.10	74.00	15.90	Peak

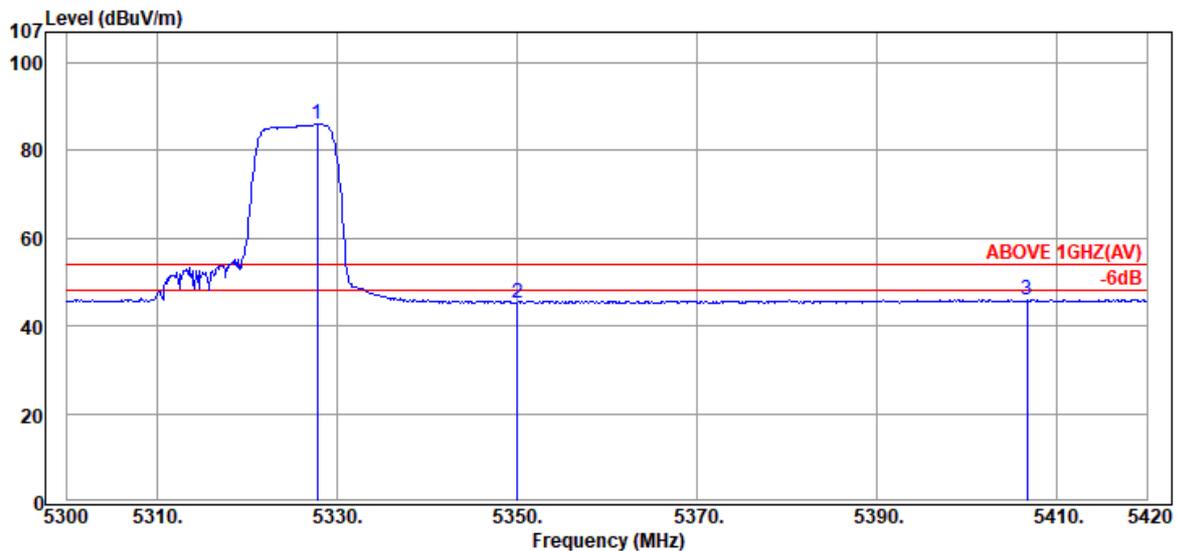


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.84	34.50	8.83	42.70	86.03	---	---	Average
	5350.04	34.50	8.84	2.06	45.40	54.00	8.60	Average
	5406.68	34.50	8.87	2.64	46.01	54.00	7.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

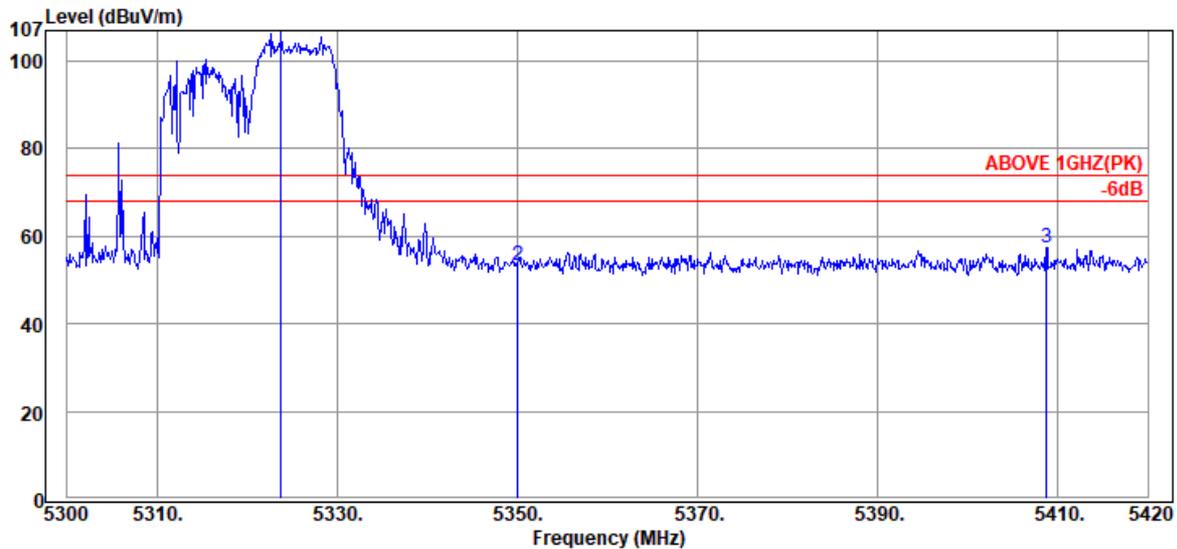

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5323.76	34.50	8.83	63.20	106.53	---	---	Peak
	5350.04	34.50	8.84	10.04	53.38	74.00	20.62	Peak
	5408.72	34.50	8.87	13.98	57.35	74.00	16.65	Peak

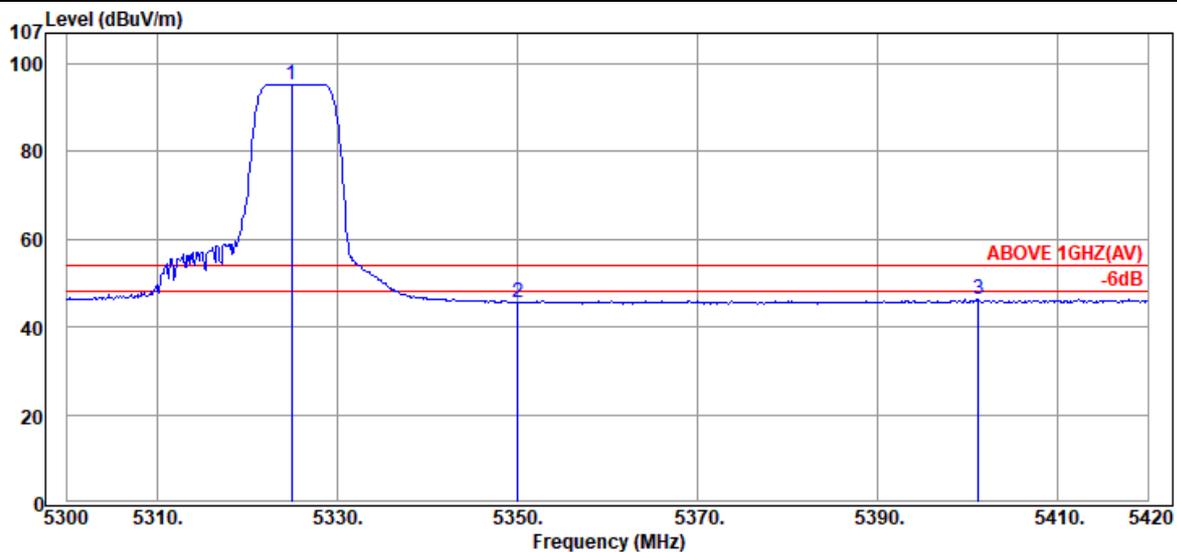


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5324.96	34.50	8.83	52.08	95.41	---	---	Average
	5350.04	34.50	8.84	2.34	45.68	54.00	8.32	Average
	5401.16	34.50	8.87	2.88	46.25	54.00	7.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

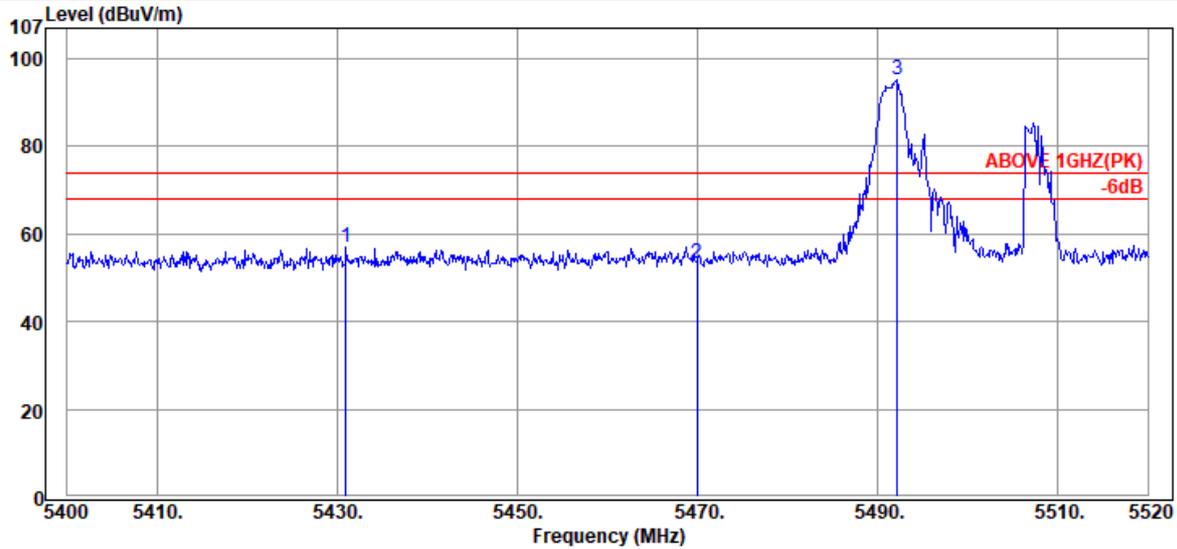

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.96	34.50	8.88	13.67	57.05	74.00	16.95	Peak
5469.96	34.50	8.91	9.96	53.37	74.00	20.63	Peak
@ 5492.16	34.50	8.92	51.75	95.17	---	---	Peak

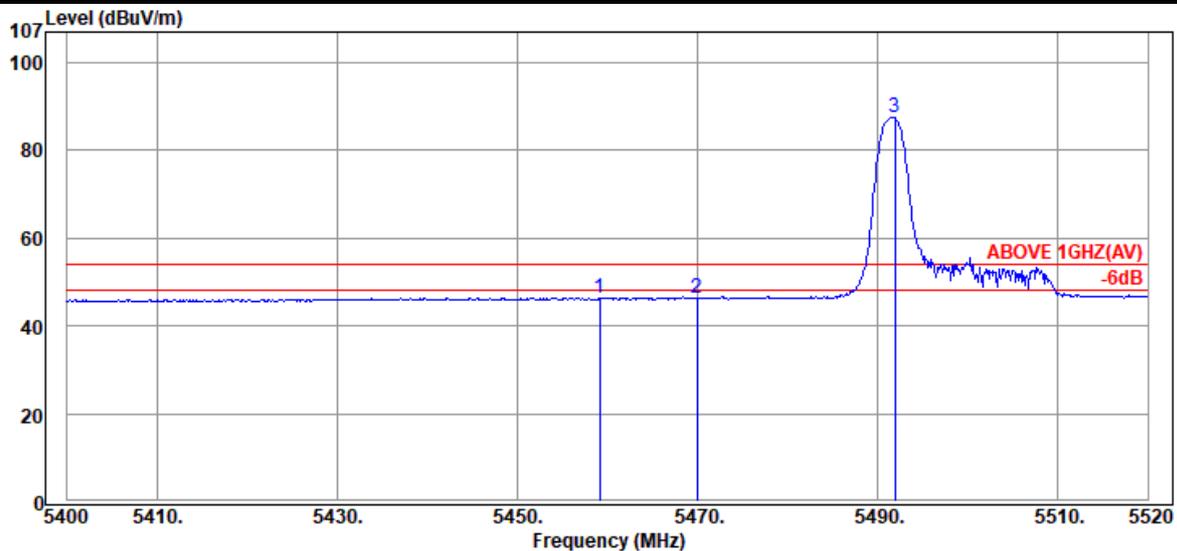


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.16	34.50	8.90	3.05	46.45	54.00	7.55	Average
5469.96	34.50	8.91	2.92	46.33	54.00	7.67	Average
@ 5491.92	34.50	8.92	44.10	87.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

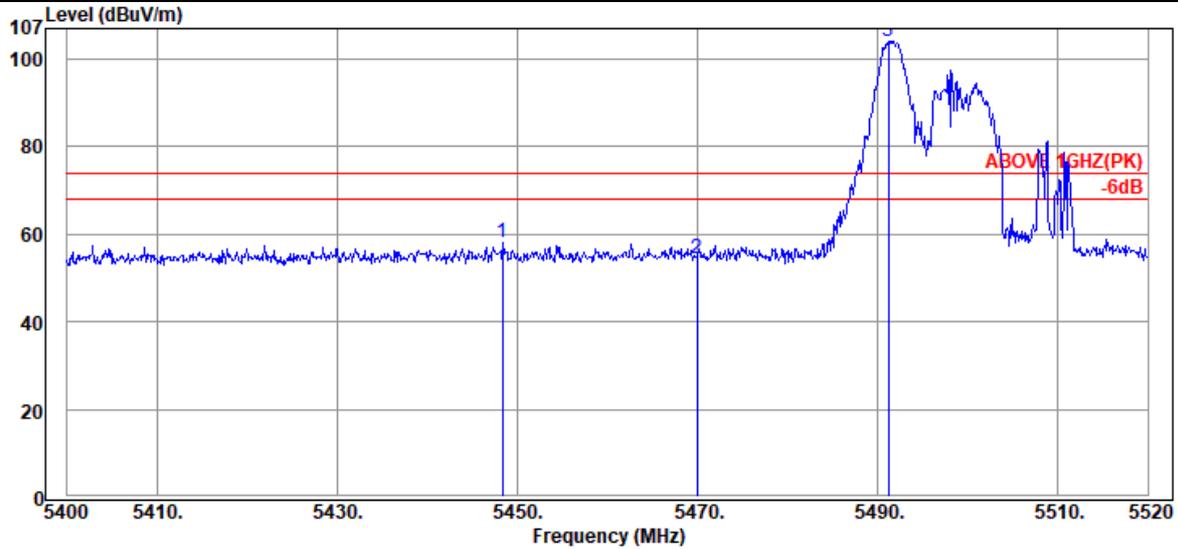

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.36	34.50	8.89	14.76	58.15	74.00	15.85	Peak
5469.96	34.50	8.91	11.04	54.45	74.00	19.55	Peak
@ 5491.20	34.50	8.92	60.65	104.07	---	---	Peak

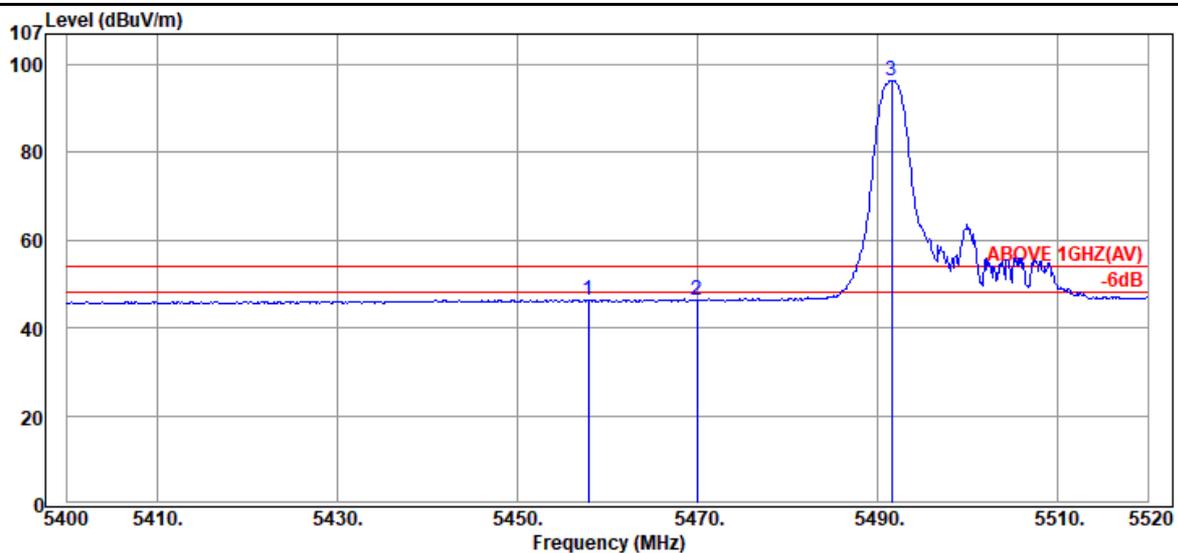


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.84	34.50	8.90	3.01	46.41	54.00	7.59	Average
5469.96	34.50	8.91	2.94	46.35	54.00	7.65	Average
@ 5491.56	34.50	8.92	53.09	96.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

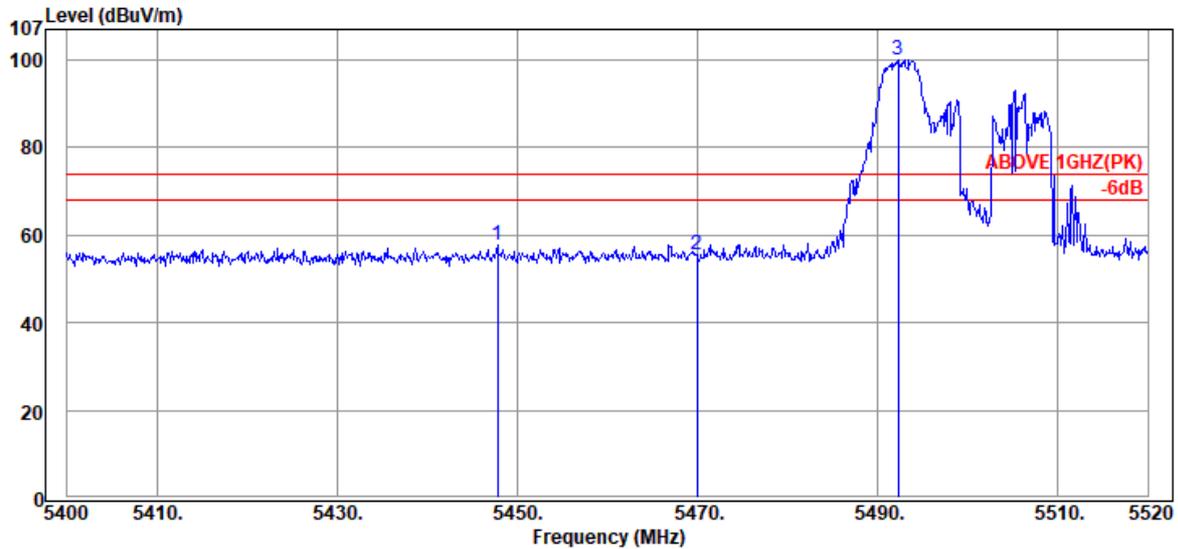

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.76	34.50	8.89	14.51	57.90	74.00	16.10	Peak
5469.96	34.50	8.91	11.97	55.38	74.00	18.62	Peak
@ 5492.28	34.50	8.92	56.52	99.94	---	---	Peak

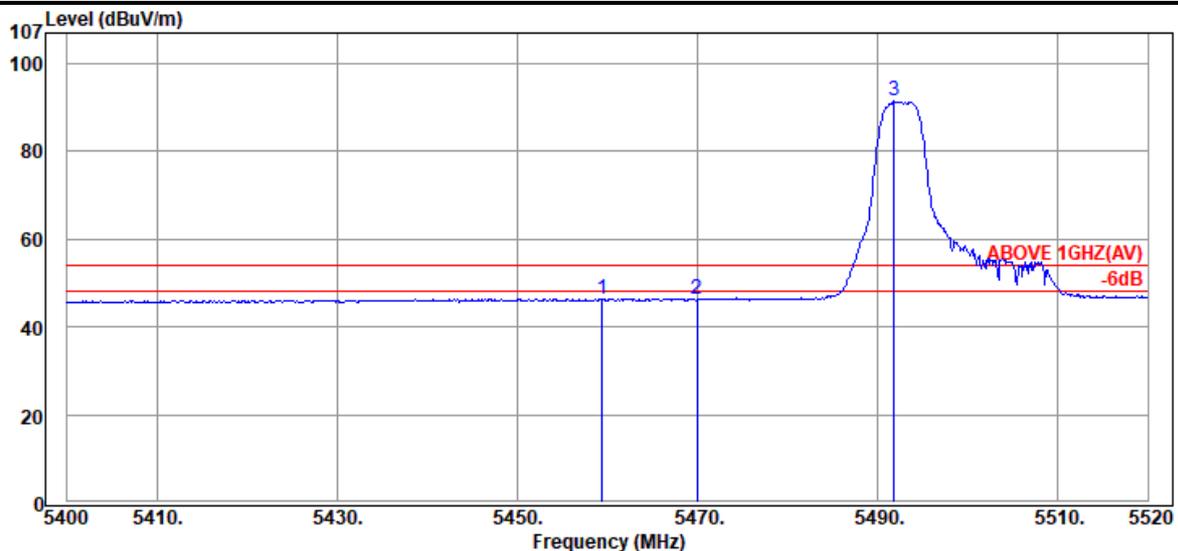


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.40	34.50	8.90	3.03	46.43	54.00	7.57	Average
5469.96	34.50	8.91	2.82	46.23	54.00	7.77	Average
@ 5491.80	34.50	8.92	48.00	91.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

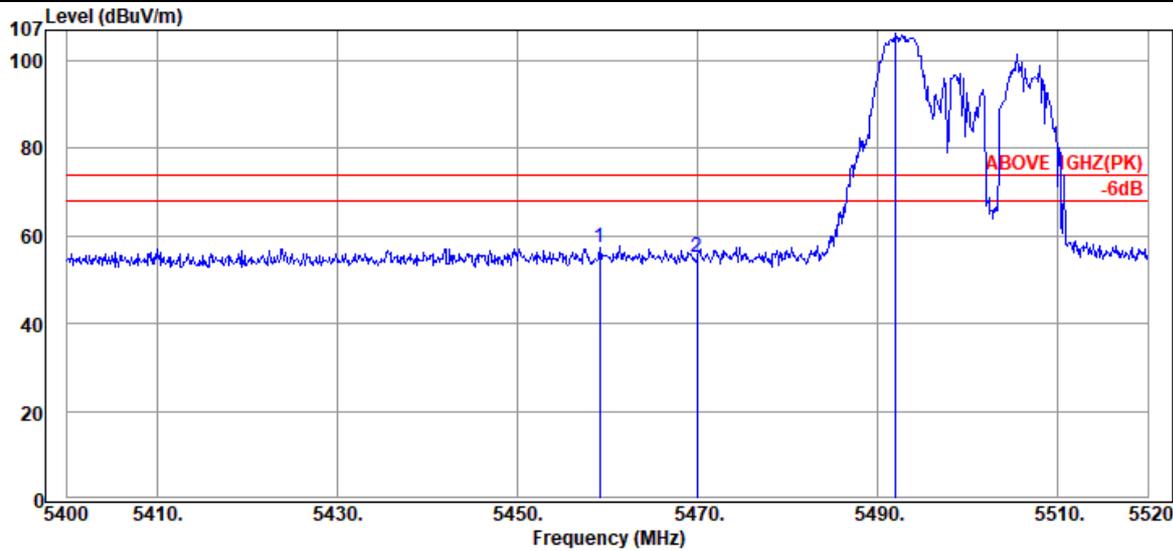

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.16	34.50	8.90	13.85	57.25	74.00	16.75	Peak
5469.96	34.50	8.91	11.83	55.24	74.00	18.76	Peak
@ 5491.92	34.50	8.92	62.92	106.34	---	---	Peak

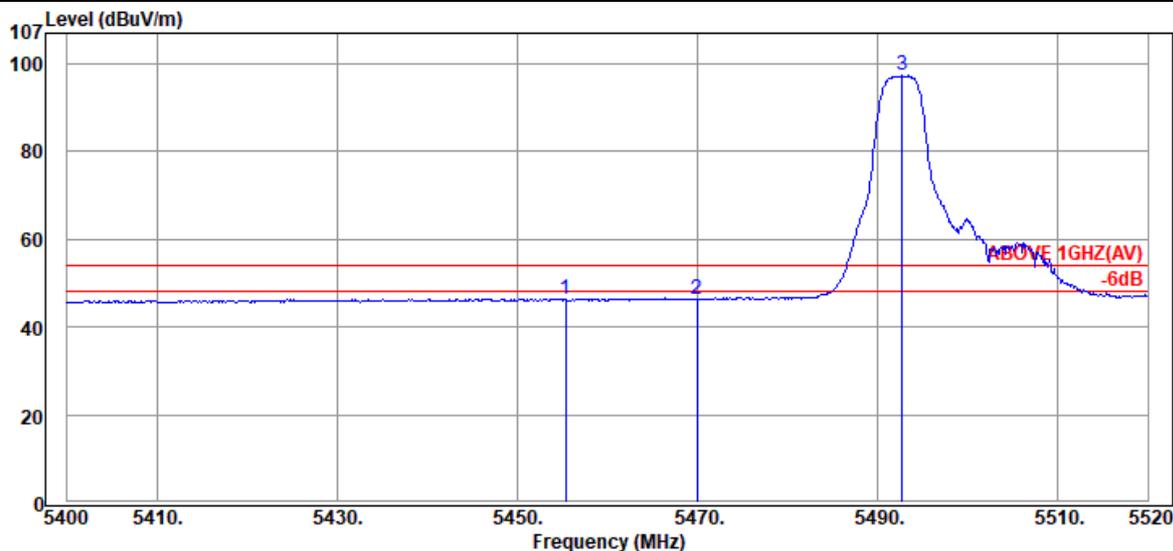


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.32	34.50	8.90	3.04	46.44	54.00	7.56	Average
5469.96	34.50	8.91	3.00	46.41	54.00	7.59	Average
@ 5492.76	34.50	8.92	53.96	97.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

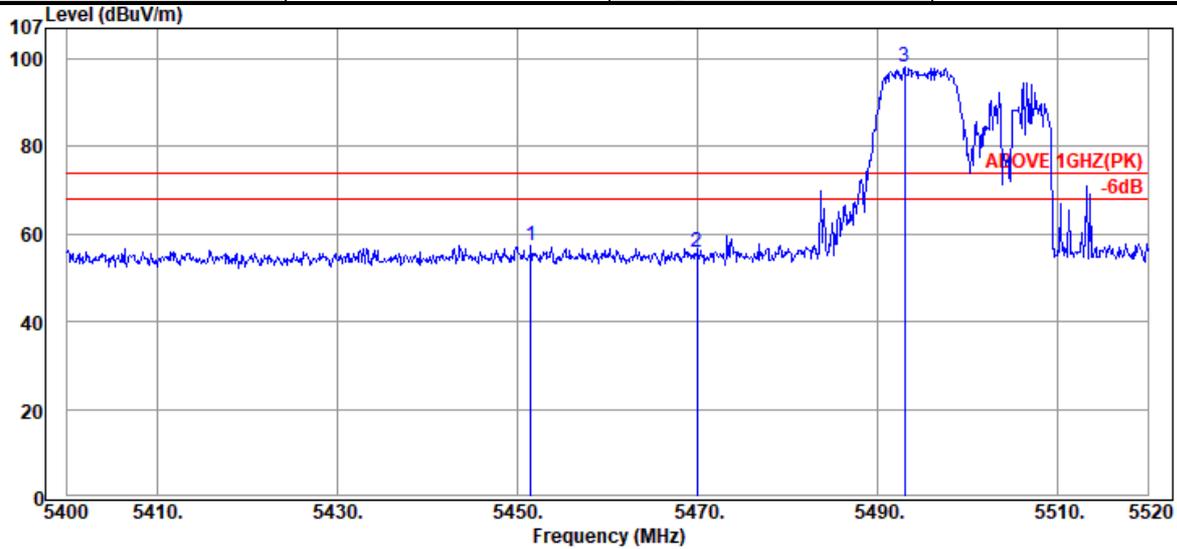

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.48	34.50	8.90	13.82	57.22	74.00	16.78	Peak
5469.96	34.50	8.91	12.46	55.87	74.00	18.13	Peak
@ 5493.00	34.50	8.92	54.62	98.04	---	---	Peak

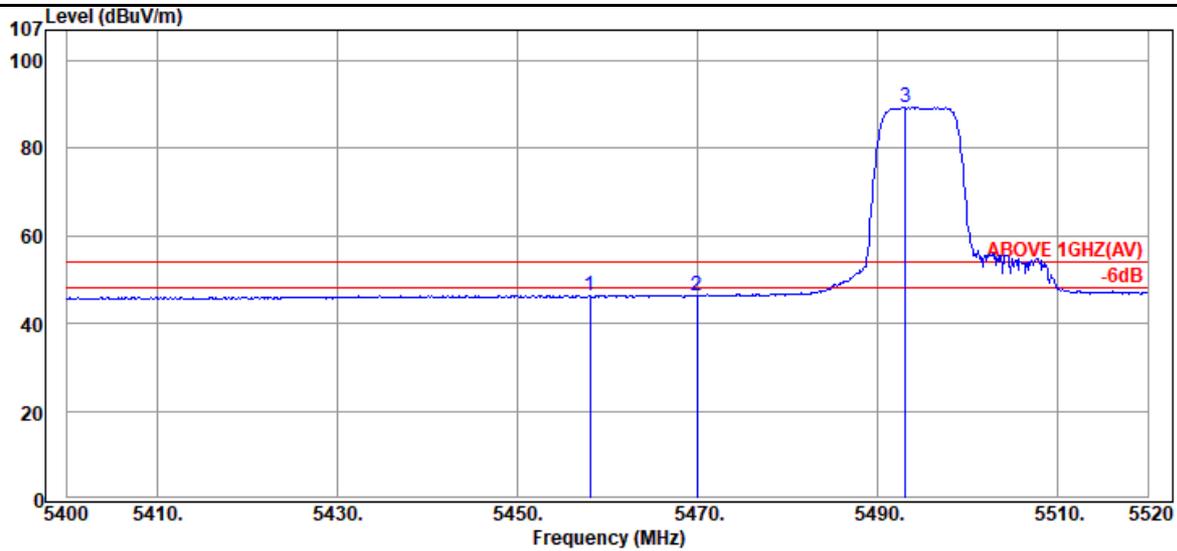


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.08	34.50	8.90	2.98	46.38	54.00	7.62	Average
5469.96	34.50	8.91	3.01	46.42	54.00	7.58	Average
@ 5493.12	34.50	8.92	45.88	89.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

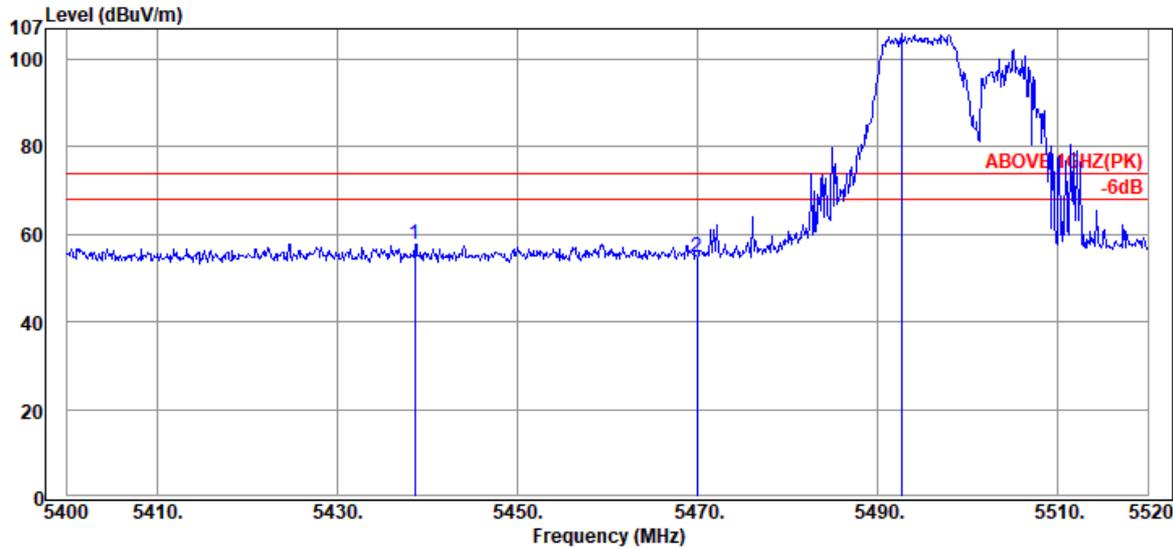

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.64	34.50	8.89	14.30	57.69	74.00	16.31	Peak
5469.96	34.50	8.91	11.49	54.90	74.00	19.10	Peak
@ 5492.64	34.50	8.92	62.49	105.91	---	---	Peak

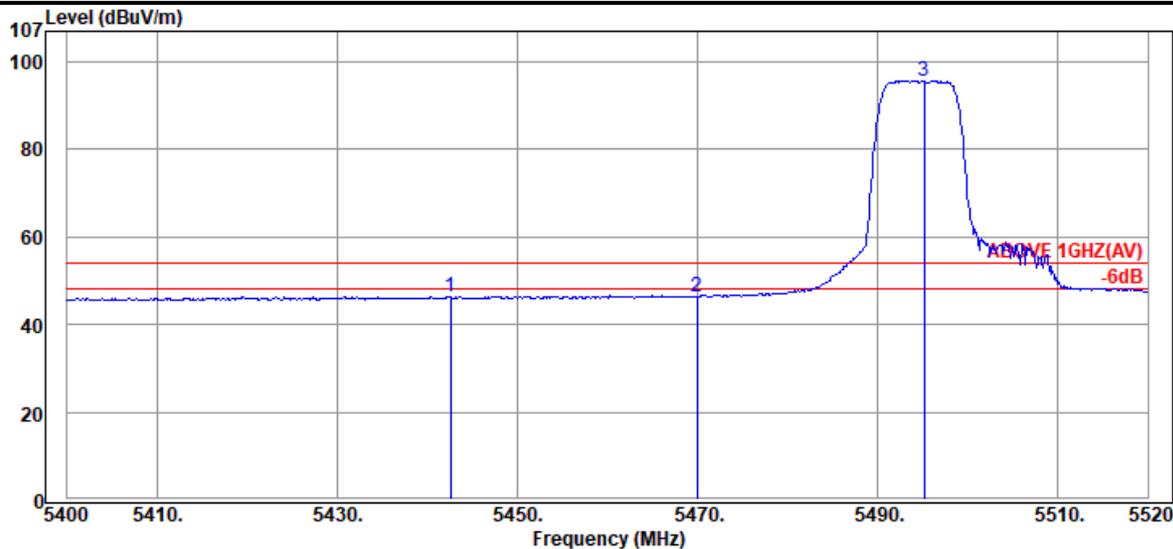


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.60	34.50	8.89	3.08	46.47	54.00	7.53	Average
5469.96	34.50	8.91	2.95	46.36	54.00	7.64	Average
@ 5495.16	34.50	8.92	52.28	95.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	26/8	Frequency	TX 5700MHz

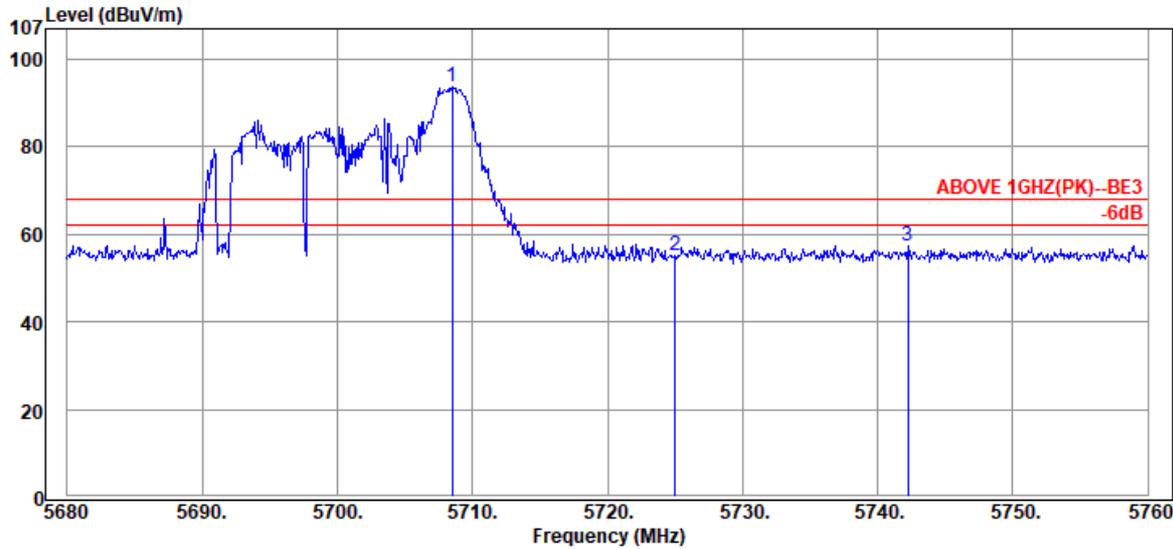

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.48	34.40	9.03	50.15	93.58	---	---	Peak
5725.04	34.40	9.04	11.63	55.07	68.20	13.13	Peak
5742.24	34.40	9.05	13.97	57.42	68.20	10.78	Peak

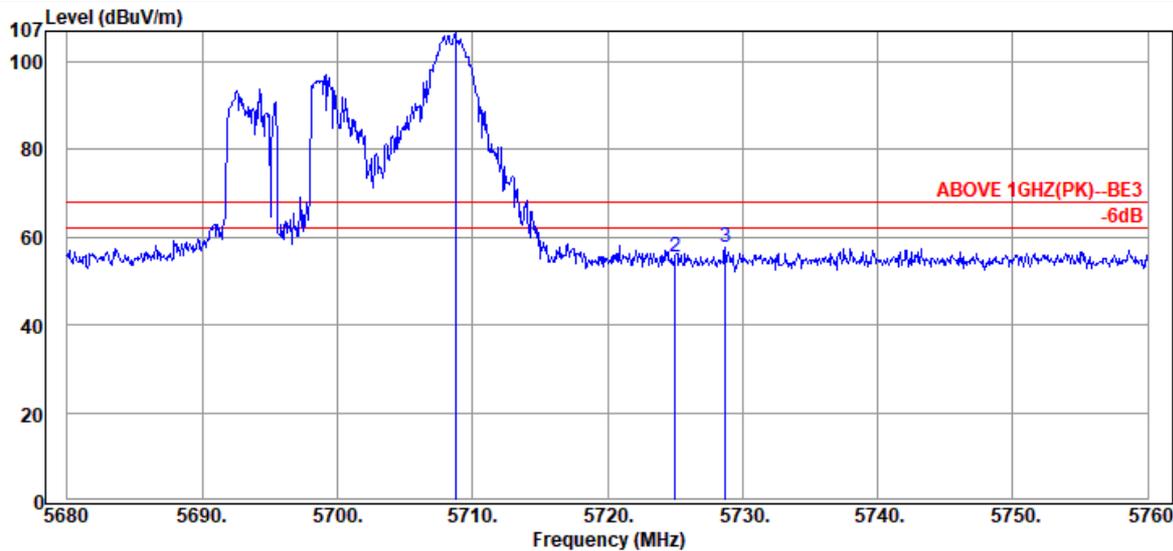


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.72	34.40	9.03	63.07	106.50	---	---	Peak
5725.04	34.40	9.04	11.91	55.35	68.20	12.85	Peak
5728.72	34.40	9.04	14.12	57.56	68.20	10.64	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	52/40	Frequency	TX 5700MHz

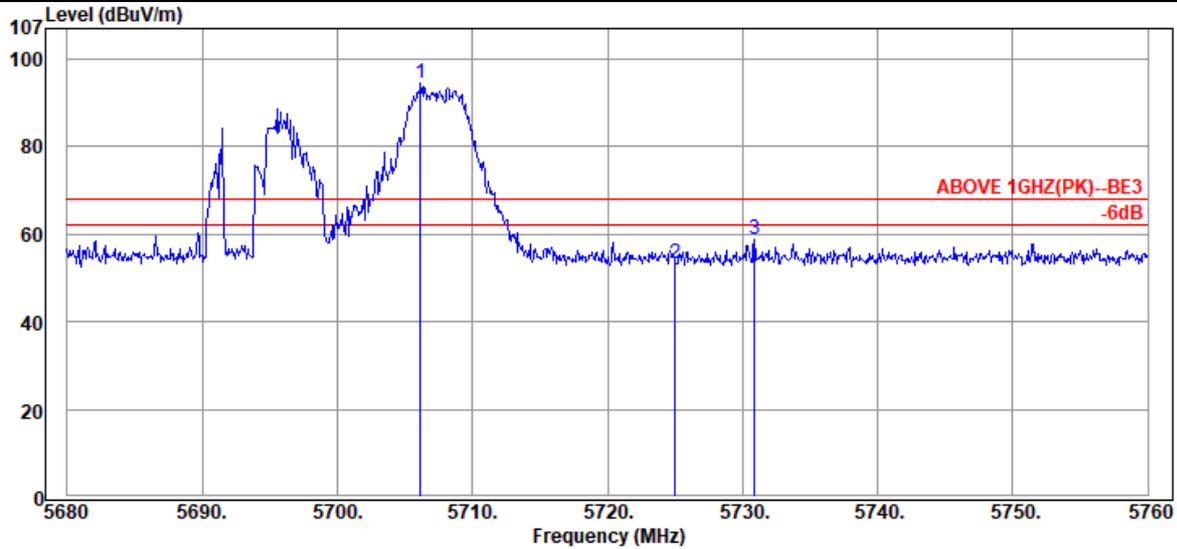

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.16	34.40	9.03	50.91	94.34	---	---	Peak
5725.04	34.40	9.04	9.86	53.30	68.20	14.90	Peak
5730.88	34.40	9.04	15.28	58.72	68.20	9.48	Peak

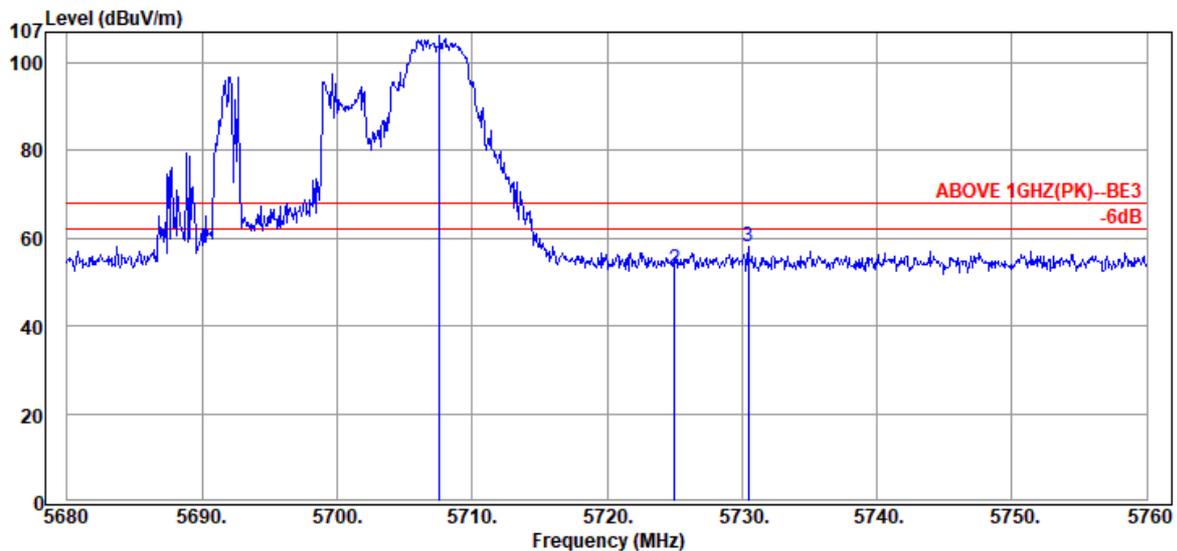


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.60	34.40	9.03	62.82	106.25	---	---	Peak
5725.04	34.40	9.04	9.37	52.81	68.20	15.39	Peak
5730.48	34.40	9.04	14.69	58.13	68.20	10.07	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	UNII Band	NII-2C
RU Configuration	106/54	Frequency	TX 5700MHz

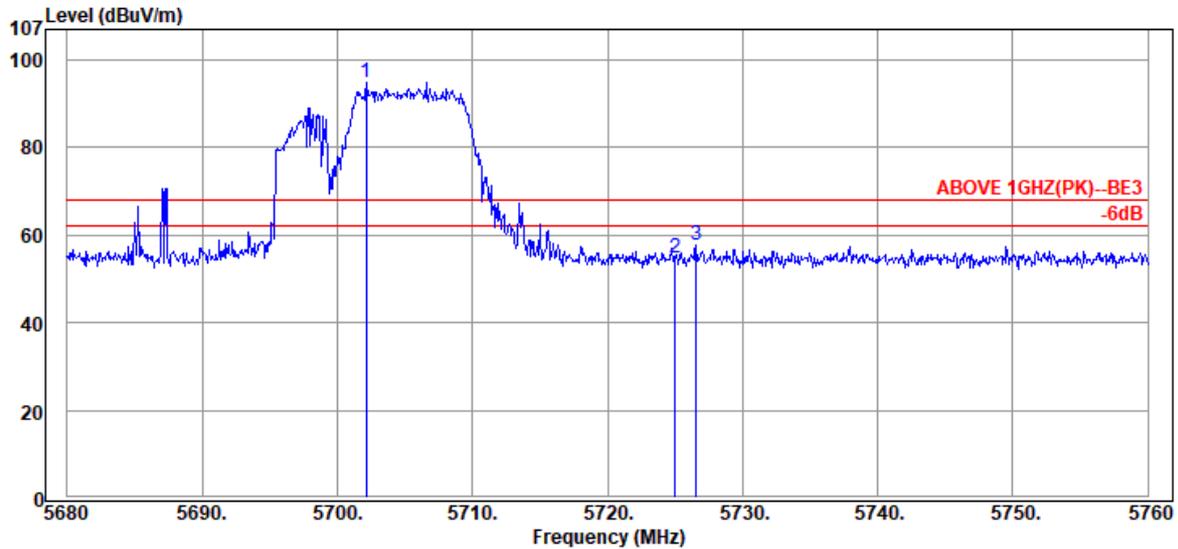

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.16	34.40	9.03	51.35	94.78	---	---	Peak
	5725.04	34.40	9.04	11.33	54.77	68.20	13.43	Peak
	5726.56	34.40	9.04	14.26	57.70	68.20	10.50	Peak

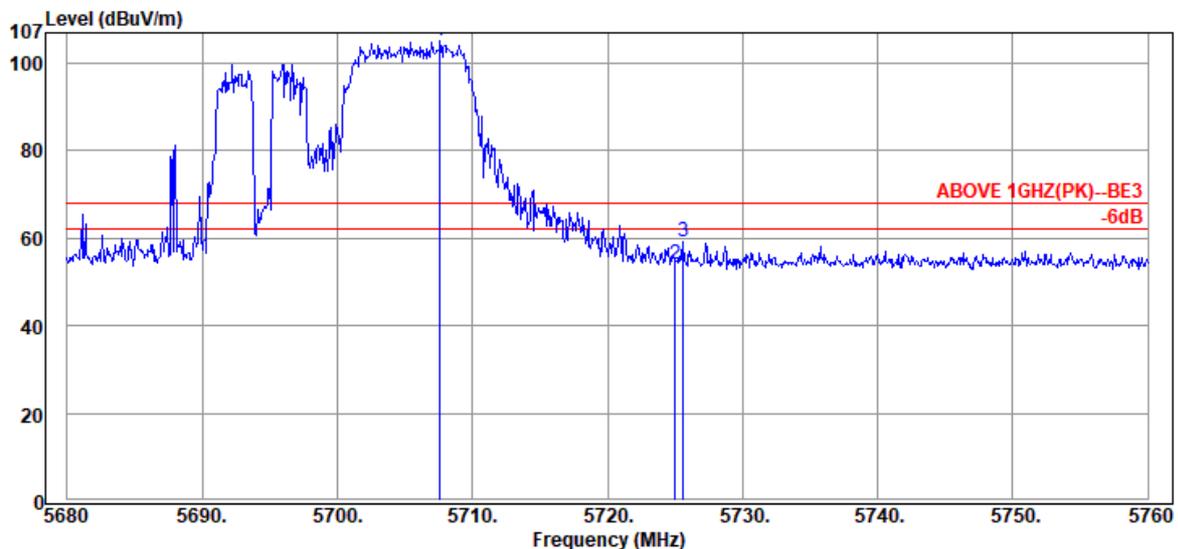


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.60	34.40	9.03	61.83	105.26	---	---	Peak
	5725.04	34.40	9.04	10.57	54.01	68.20	14.19	Peak
	5725.60	34.40	9.04	15.75	59.19	68.20	9.01	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

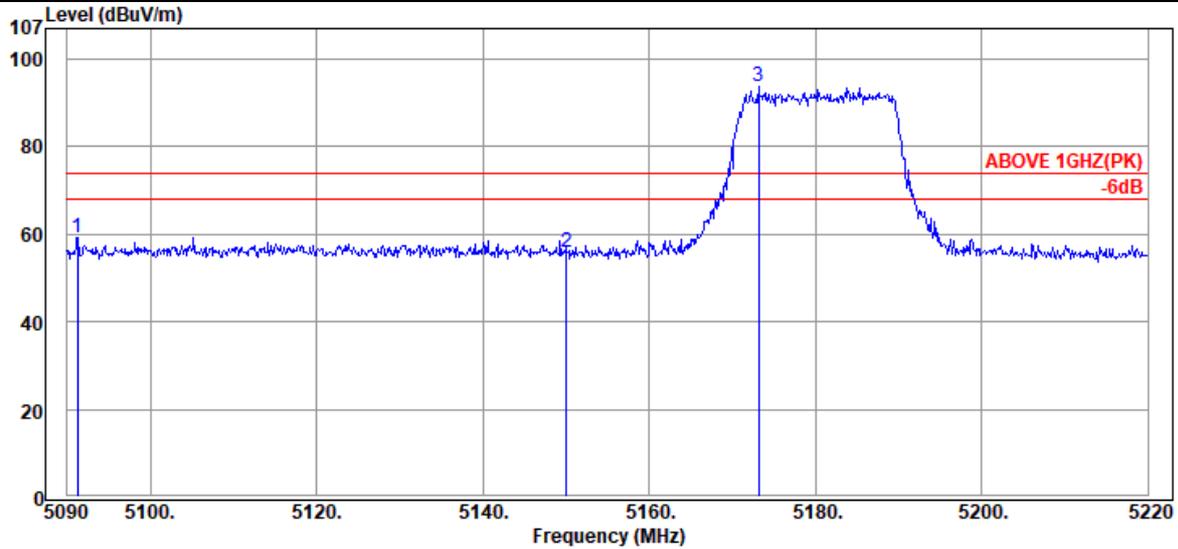

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5091.30	33.80	8.69	16.85	59.34	74.00	14.66	Peak
5150.06	33.90	8.73	13.29	55.92	74.00	18.08	Peak
@ 5173.20	33.99	8.74	51.07	93.80	---	---	Peak

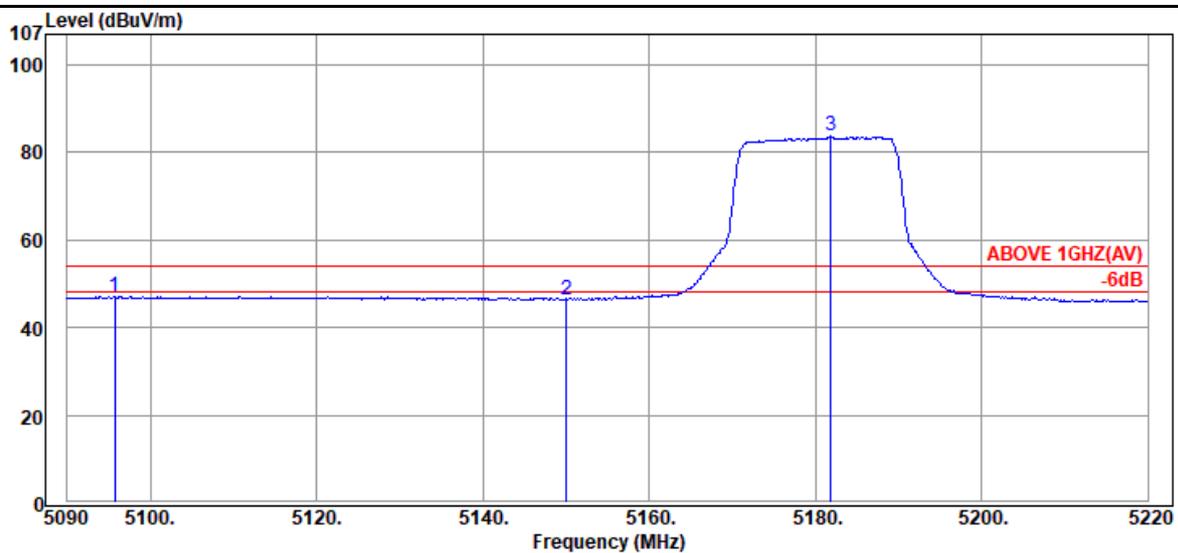


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5095.72	33.80	8.70	4.58	47.08	54.00	6.92	Average
5150.06	33.90	8.73	3.86	46.49	54.00	7.51	Average
@ 5181.91	34.03	8.75	40.88	83.66	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

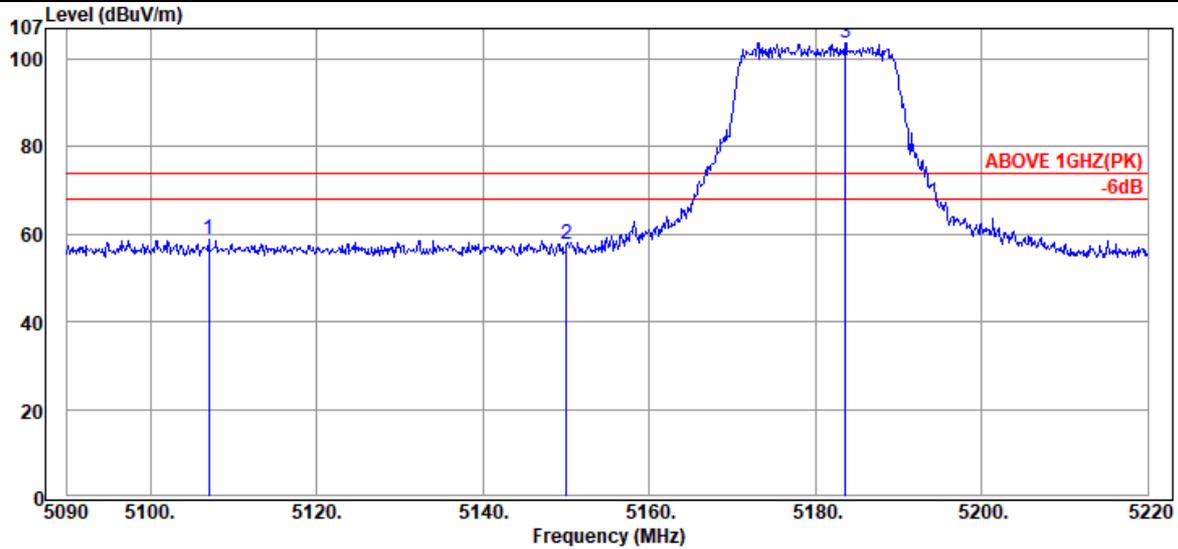

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.03	33.81	8.70	16.24	58.75	74.00	15.25	Peak
5150.06	33.90	8.73	15.24	57.87	74.00	16.13	Peak
@ 5183.60	34.03	8.75	61.06	103.84	---	---	Peak

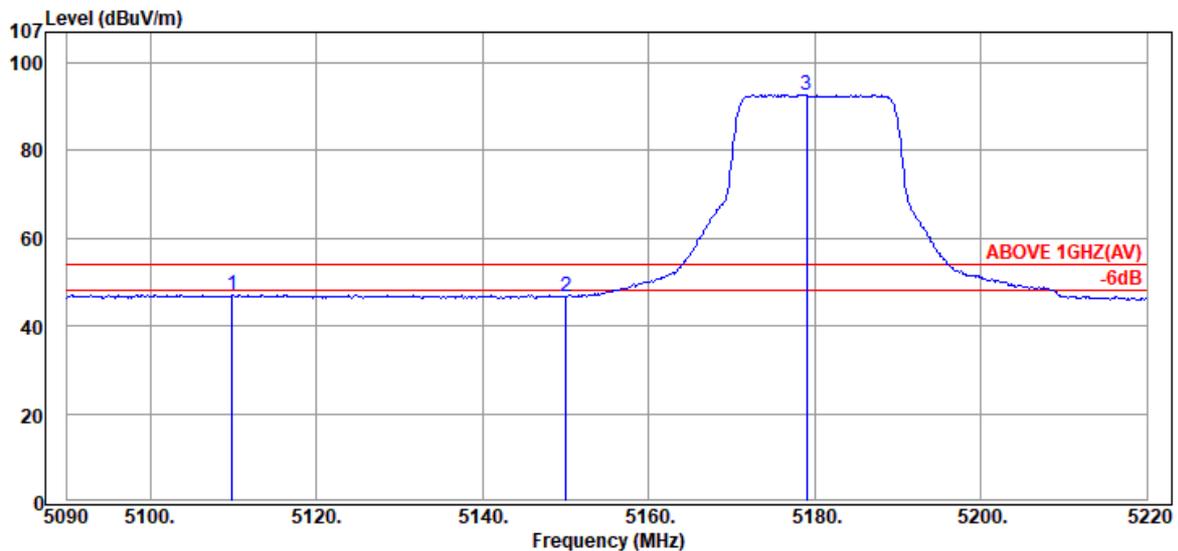


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.89	33.82	8.70	4.64	47.16	54.00	6.84	Average
5150.06	33.90	8.73	4.19	46.82	54.00	7.18	Average
@ 5179.05	34.02	8.74	49.98	92.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

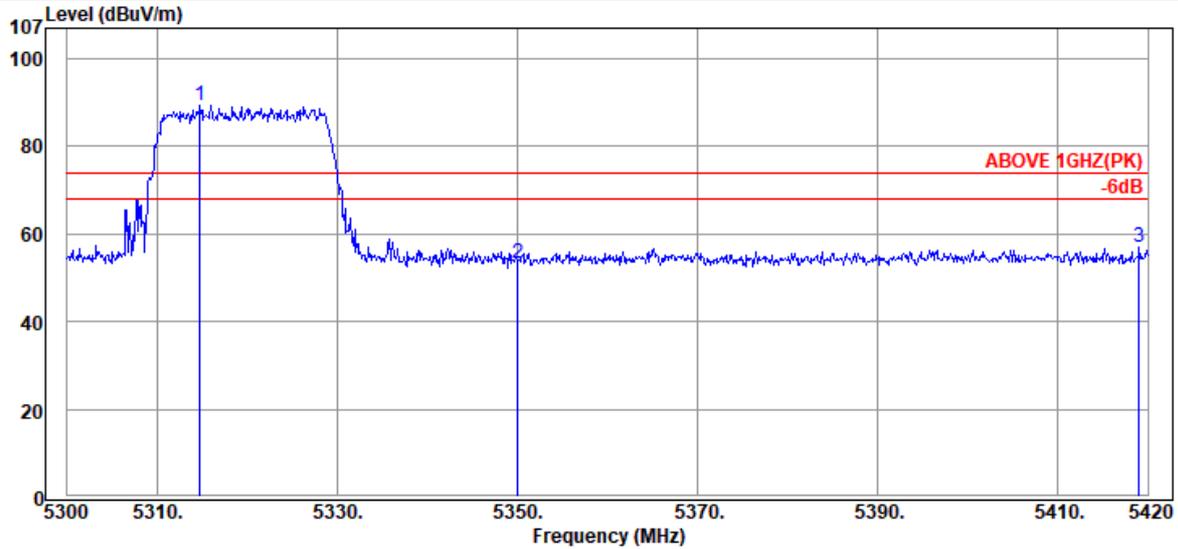

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5314.76	34.50	8.82	46.15	89.47	---	---	Peak
	5350.04	34.50	8.84	10.04	53.38	74.00	20.62	Peak
	5419.04	34.50	8.88	13.75	57.13	74.00	16.87	Peak

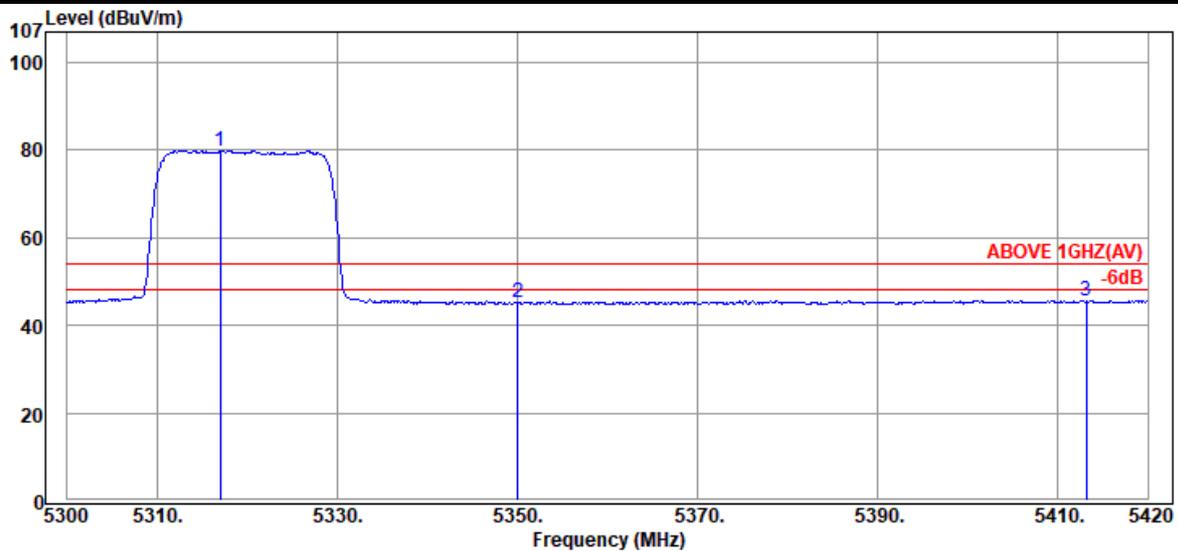


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.04	34.50	8.82	36.58	79.90	---	---	Average
	5350.04	34.50	8.84	1.94	45.28	54.00	8.72	Average
	5413.16	34.50	8.88	2.31	45.69	54.00	8.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

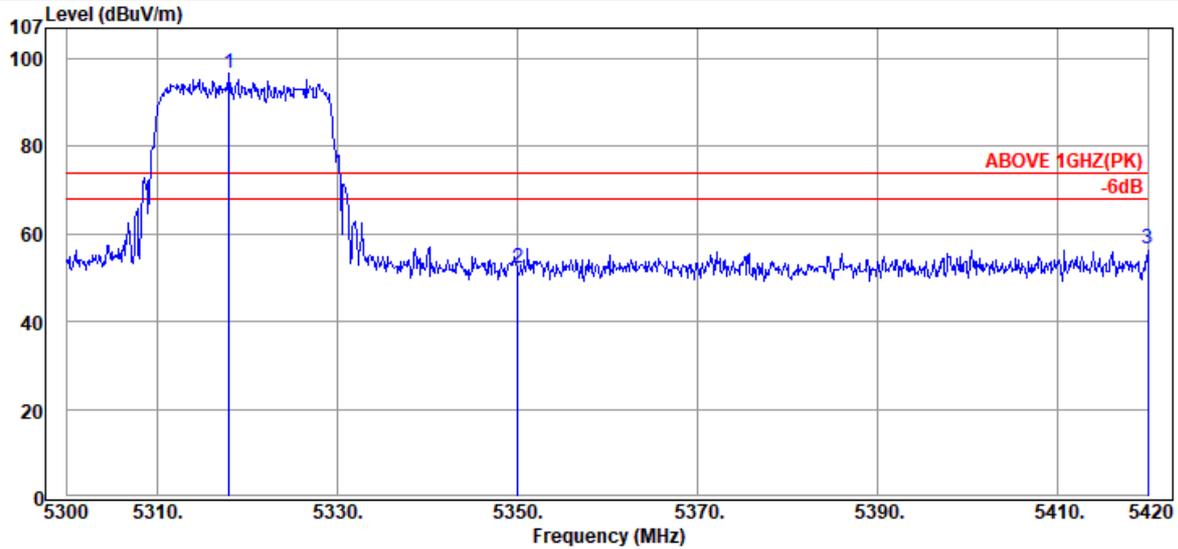

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.00	34.50	8.82	53.34	96.66	---	---	Peak
	5350.04	34.50	8.84	8.78	52.12	74.00	21.88	Peak
	5420.00	34.50	8.88	13.16	56.54	74.00	17.46	Peak

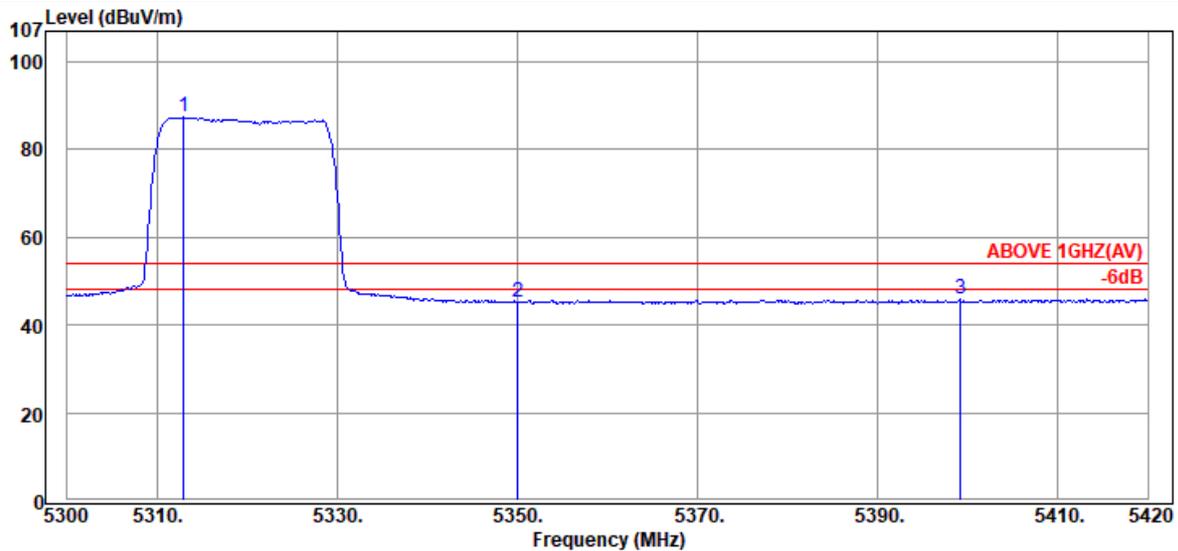


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5312.96	34.50	8.82	44.06	87.38	---	---	Average
	5350.04	34.50	8.84	1.98	45.32	54.00	8.68	Average
	5399.24	34.50	8.87	2.44	45.81	54.00	8.19	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

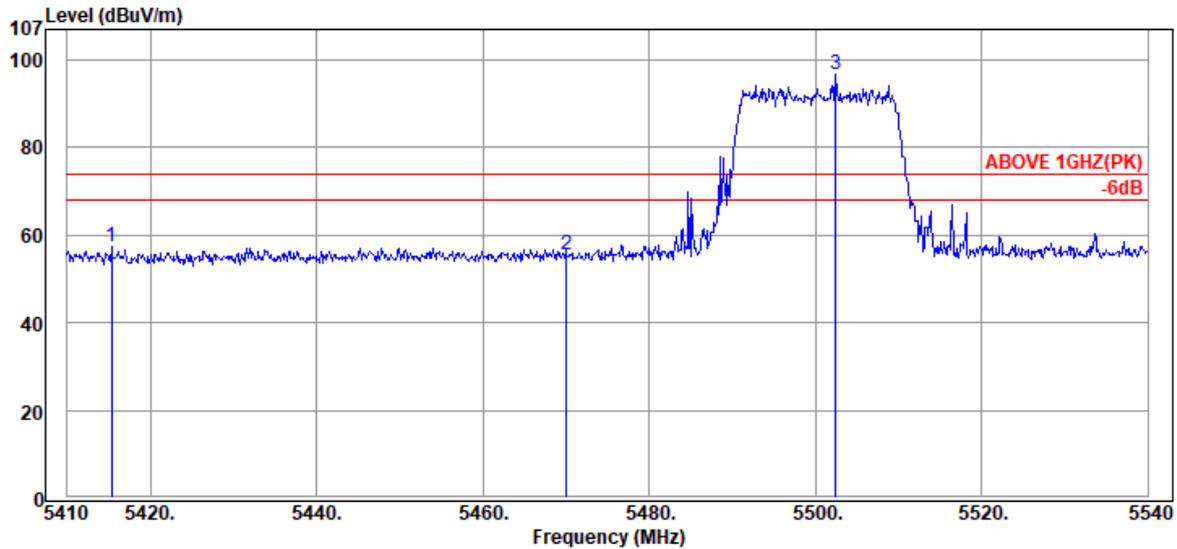

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.33	34.50	8.88	13.90	57.28	74.00	16.72	Peak
5470.06	34.50	8.91	12.05	55.46	74.00	18.54	Peak
@ 5502.43	34.50	8.92	53.26	96.68	---	---	Peak

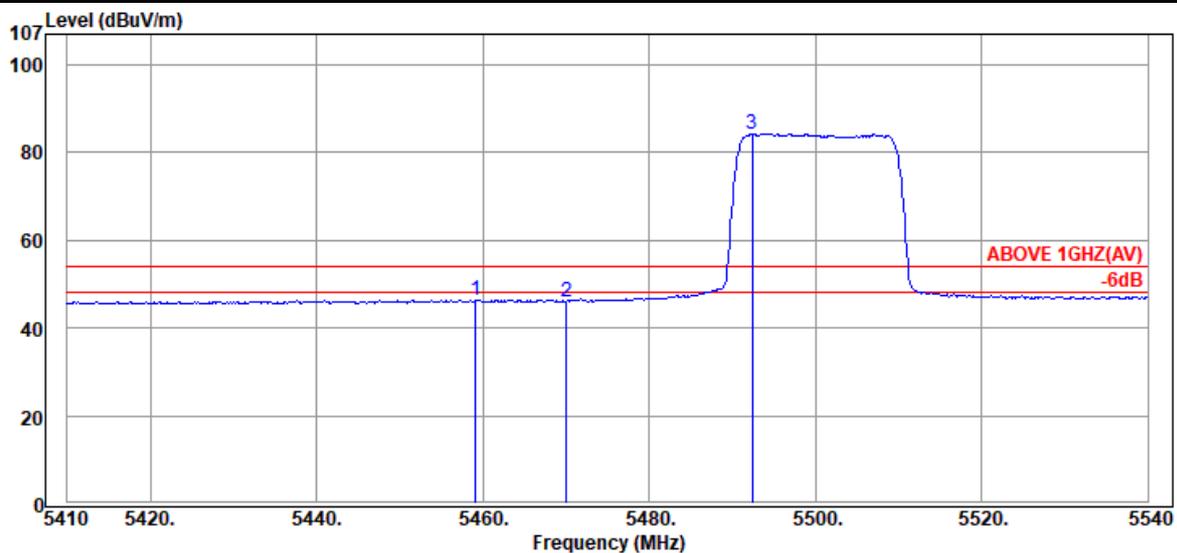


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.14	34.50	8.90	2.95	46.35	54.00	7.65	Average
5470.06	34.50	8.91	2.68	46.09	54.00	7.91	Average
@ 5492.42	34.50	8.92	40.93	84.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

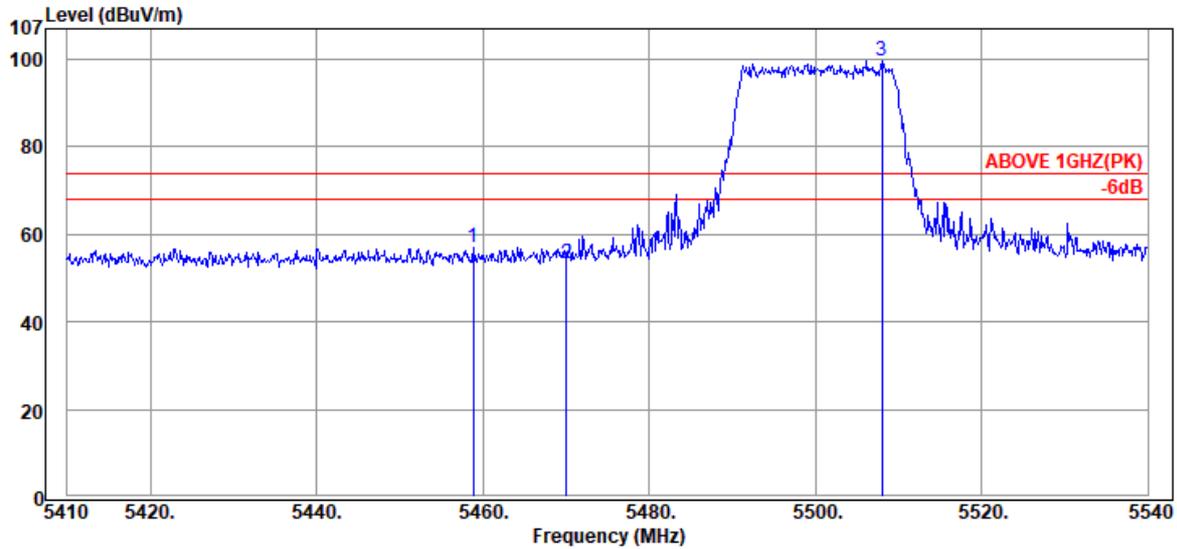

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.88	34.50	8.90	13.77	57.17	74.00	16.83	Peak
5470.06	34.50	8.91	9.99	53.40	74.00	20.60	Peak
@ 5508.02	34.52	8.93	56.03	99.48	---	---	Peak

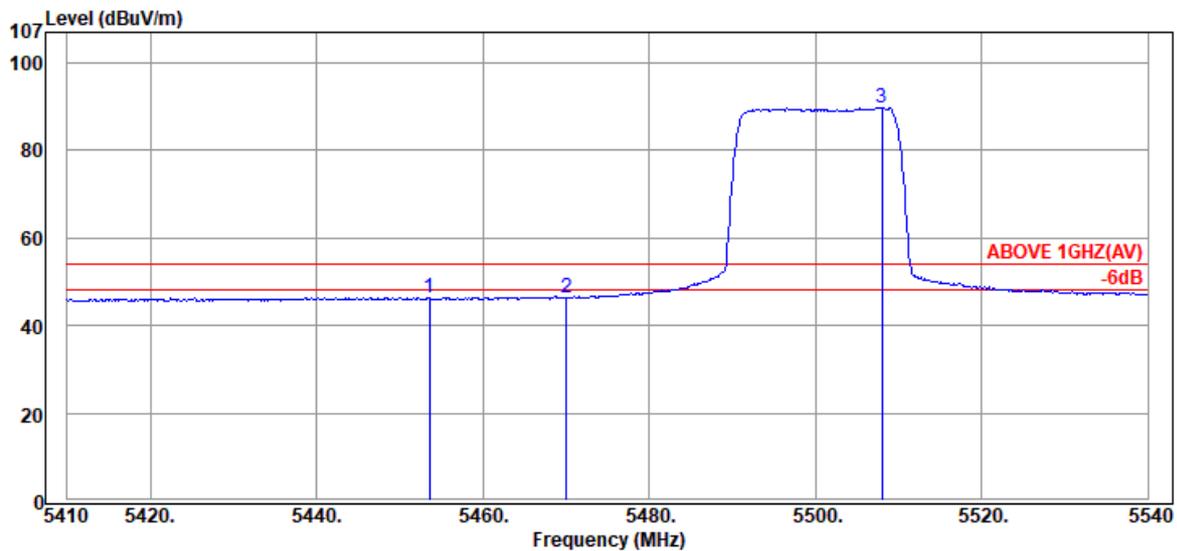


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.55	34.50	8.90	2.98	46.38	54.00	7.62	Average
5470.06	34.50	8.91	2.80	46.21	54.00	7.79	Average
@ 5508.02	34.52	8.93	46.29	89.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	UNII Band	NII-2C
RU Configuration	242/62	Frequency	TX 5670MHz

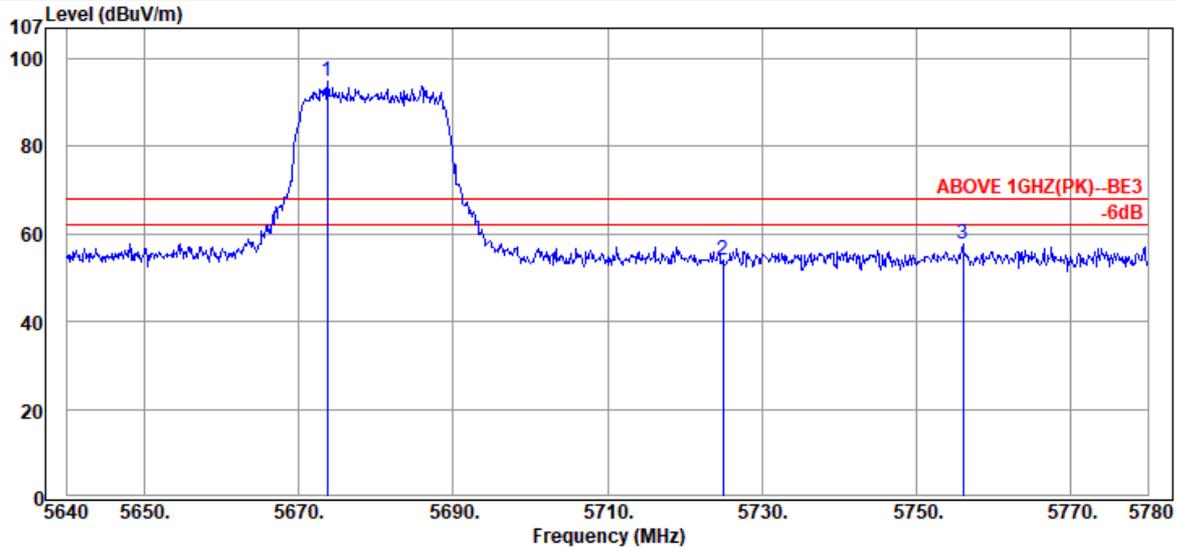

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5673.74	34.51	9.01	51.39	94.91	---	---	Peak
	5724.98	34.40	9.04	10.44	53.88	68.20	14.32	Peak
	5756.06	34.38	9.06	14.27	57.71	68.20	10.49	Peak

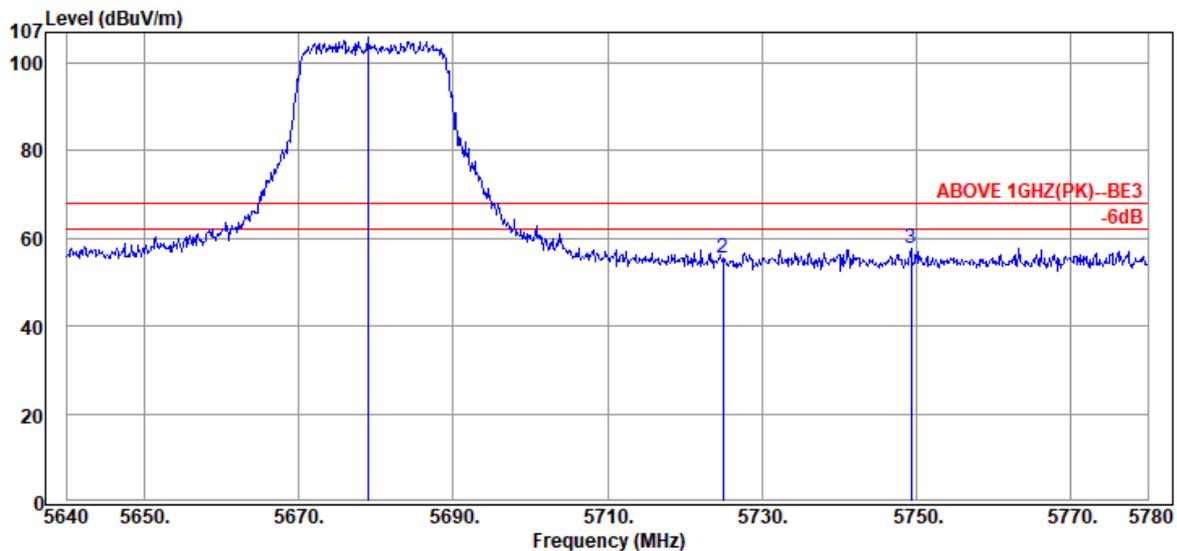


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5678.92	34.48	9.02	62.26	105.76	---	---	Peak
	5724.98	34.40	9.04	12.24	55.68	68.20	12.52	Peak
	5749.34	34.40	9.05	14.20	57.65	68.20	10.55	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

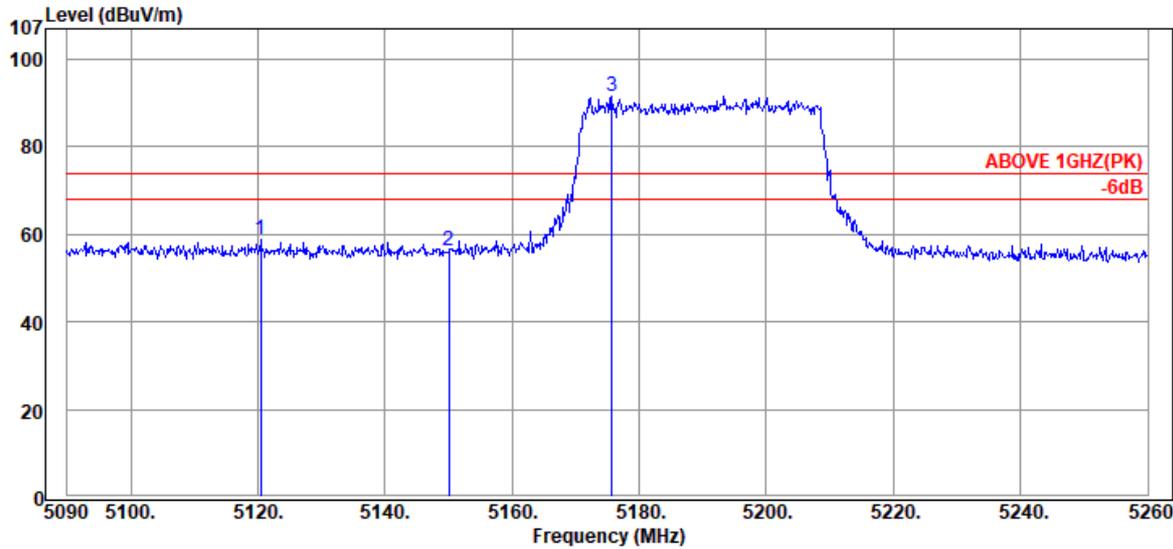

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.43	33.84	8.71	16.22	58.77	74.00	15.23	Peak
5150.01	33.90	8.73	13.48	56.11	74.00	17.89	Peak
@ 5175.68	34.00	8.74	48.92	91.66	---	---	Peak

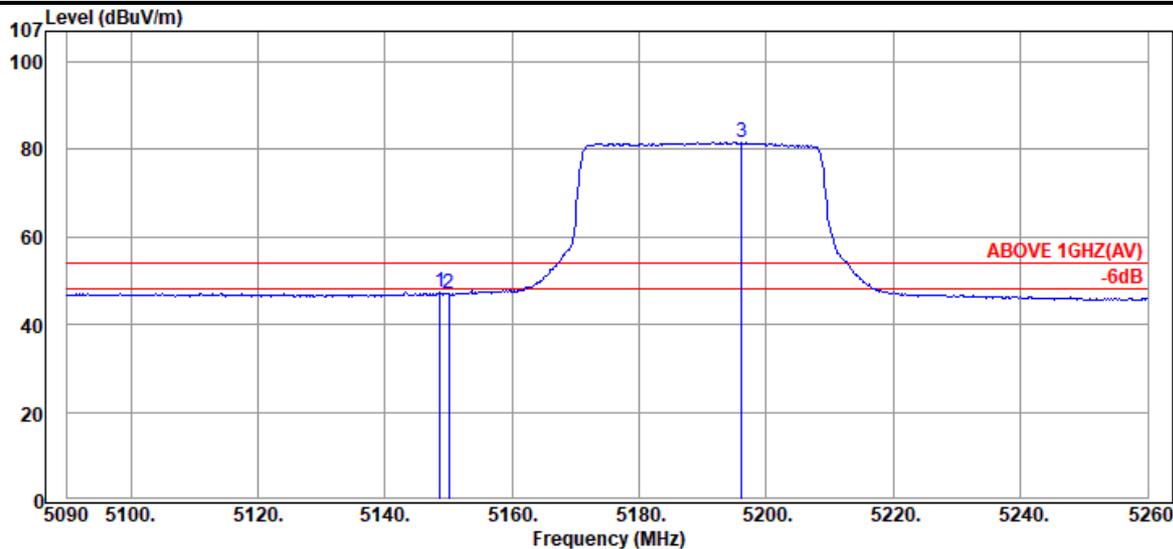


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.65	33.90	8.73	4.64	47.27	54.00	6.73	Average
5150.01	33.90	8.73	4.28	46.91	54.00	7.09	Average
@ 5196.08	34.08	8.75	38.75	81.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

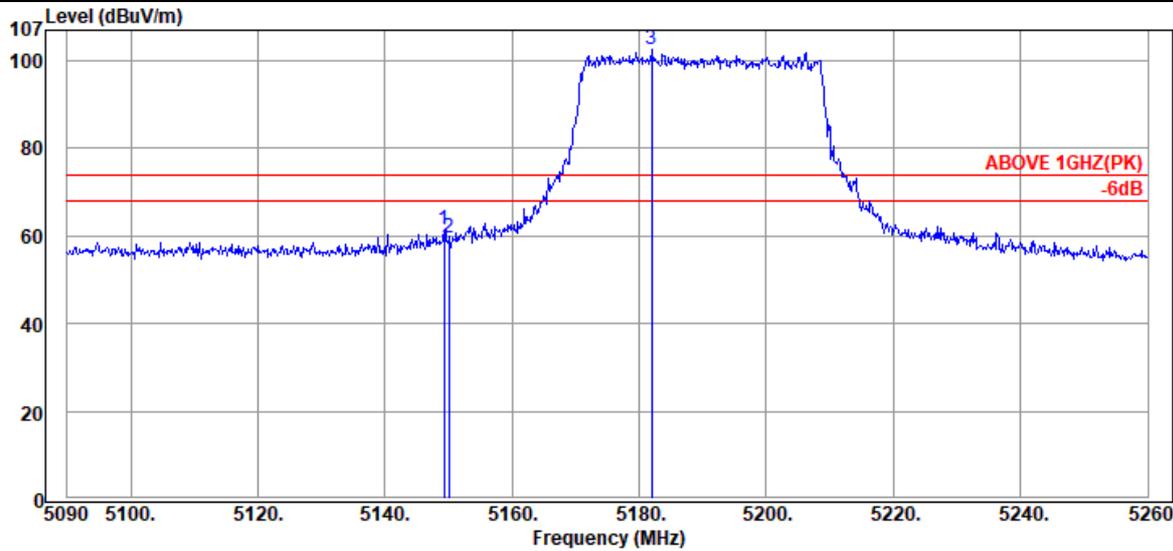

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.33	33.90	8.73	18.95	61.58	74.00	12.42	Peak
5150.01	33.90	8.73	16.94	59.57	74.00	14.43	Peak
@ 5181.97	34.03	8.75	59.84	102.62	---	---	Peak

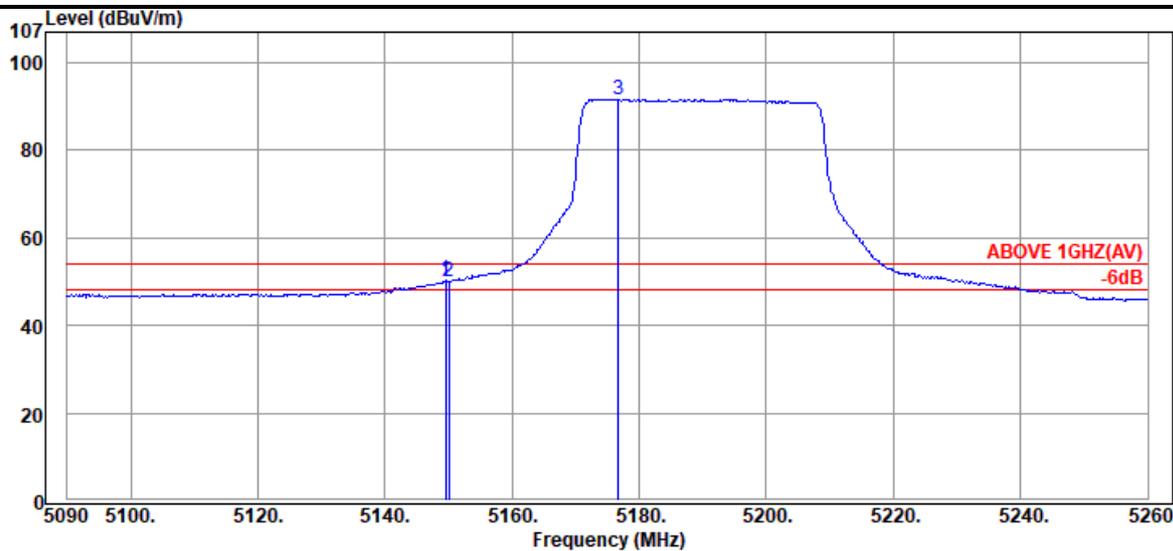


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	33.90	8.73	7.66	50.29	54.00	3.71	Average
5150.01	33.90	8.73	7.21	49.84	54.00	4.16	Average
@ 5176.70	34.01	8.74	48.94	91.69	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

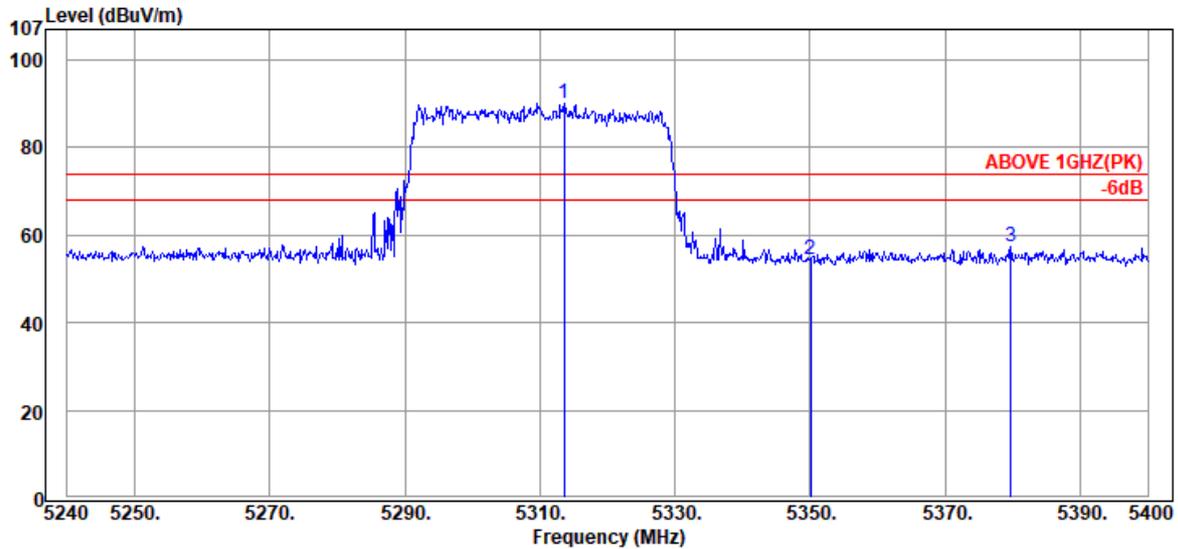

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5313.60	34.50	8.82	46.66	89.98	---	---	Peak
	5350.08	34.50	8.84	10.96	54.30	74.00	19.70	Peak
	5379.68	34.50	8.86	13.98	57.34	74.00	16.66	Peak

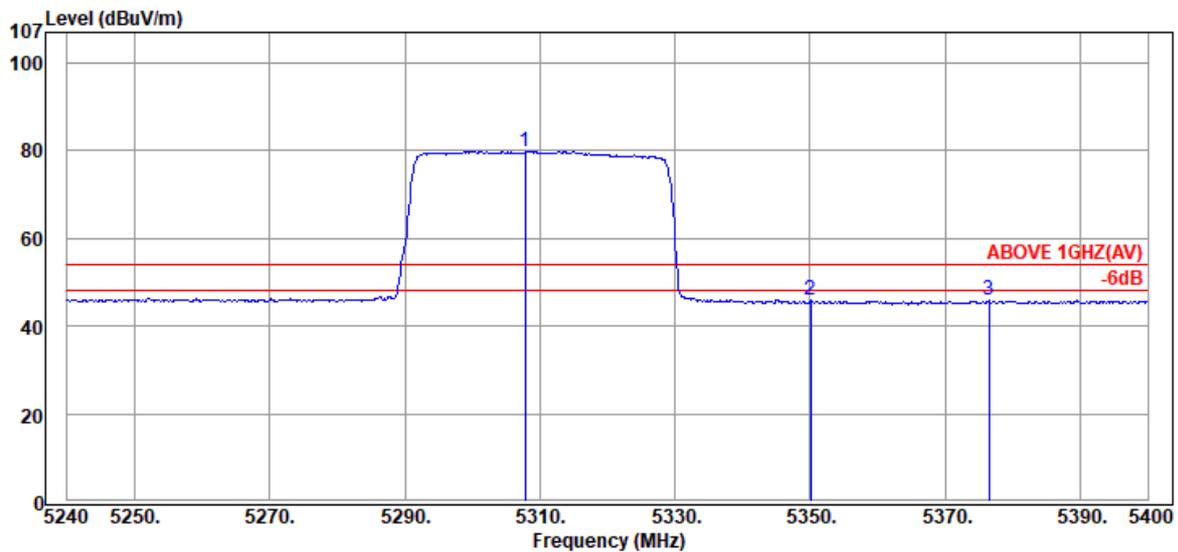


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5307.84	34.50	8.82	36.57	79.89	---	---	Average
	5350.08	34.50	8.84	2.50	45.84	54.00	8.16	Average
	5376.48	34.50	8.86	2.48	45.84	54.00	8.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

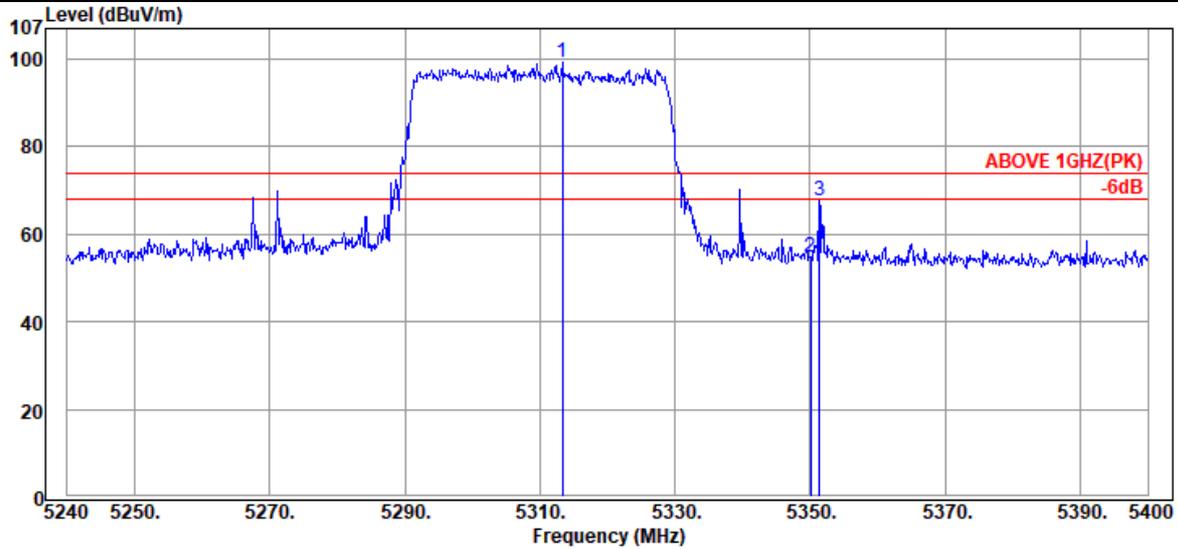

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5313.28	34.50	8.82	55.90	99.22	---	---	Peak
	5350.08	34.50	8.84	11.55	54.89	74.00	19.11	Peak
	5351.36	34.50	8.84	24.35	67.69	74.00	6.31	Peak

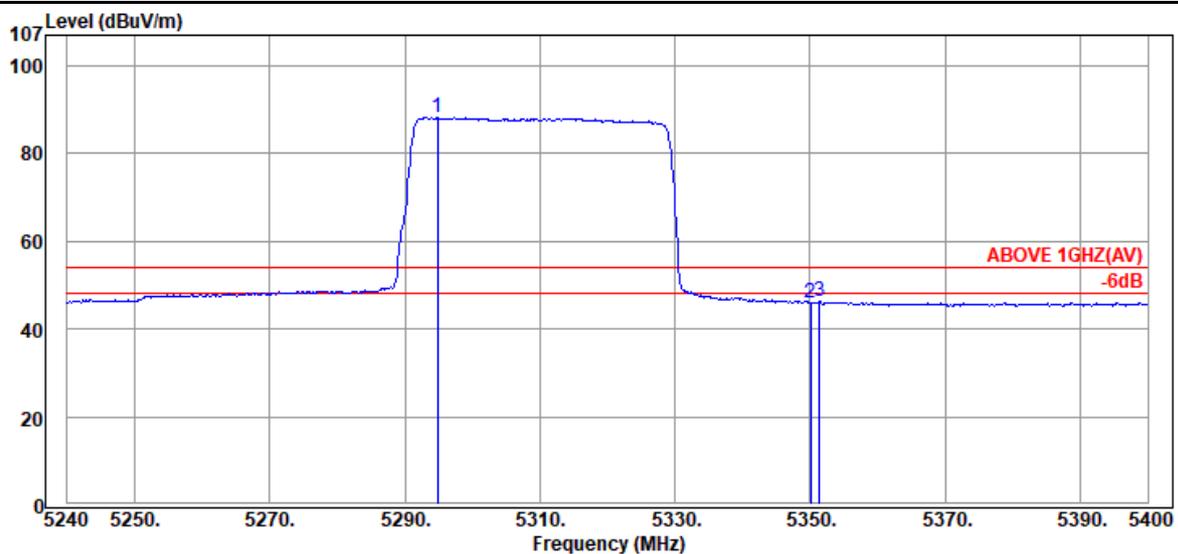


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5294.88	34.49	8.81	44.87	88.17	---	---	Average
	5350.08	34.50	8.84	2.64	45.98	54.00	8.02	Average
	5351.36	34.50	8.84	2.96	46.30	54.00	7.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

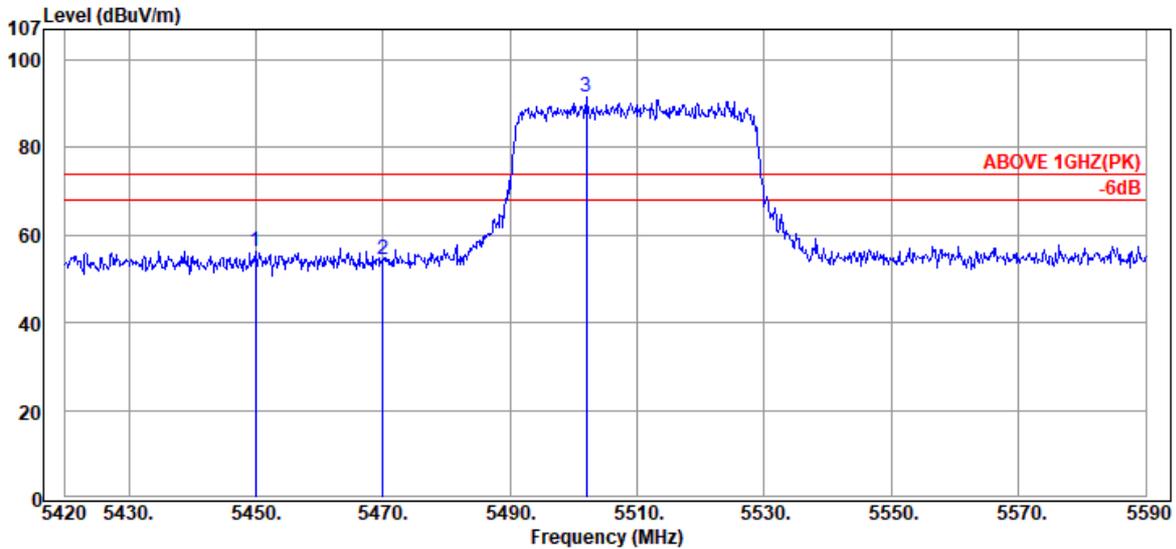

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.92	34.50	8.90	12.97	56.37	74.00	17.63	Peak
5469.98	34.50	8.91	11.19	54.60	74.00	19.40	Peak
@ 5501.94	34.50	8.92	48.11	91.53	---	---	Peak

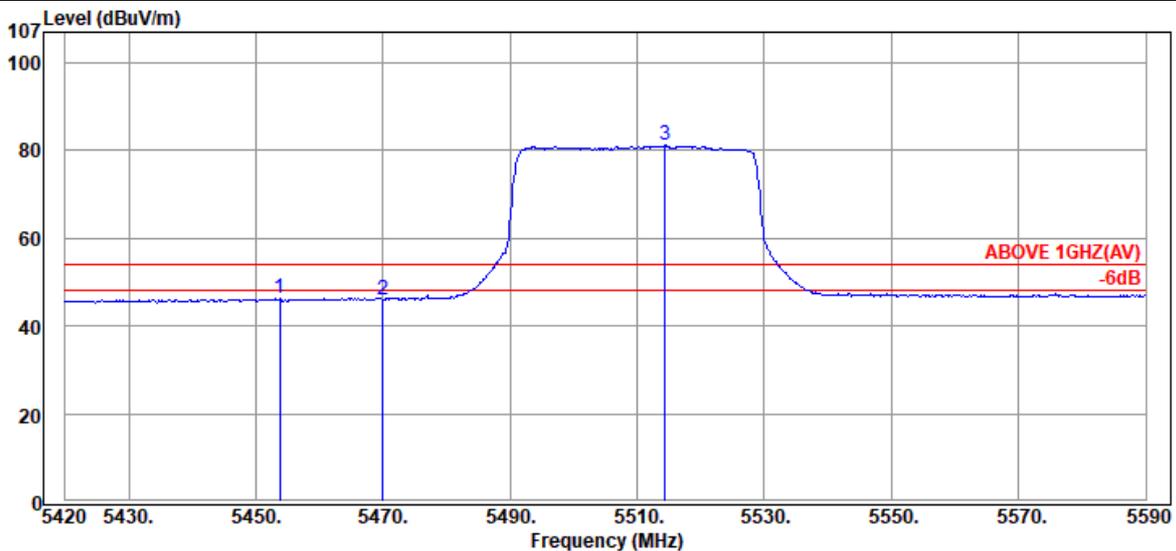


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.83	34.50	8.90	2.89	46.29	54.00	7.71	Average
5469.98	34.50	8.91	2.63	46.04	54.00	7.96	Average
@ 5514.35	34.53	8.93	37.67	81.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	UNII Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

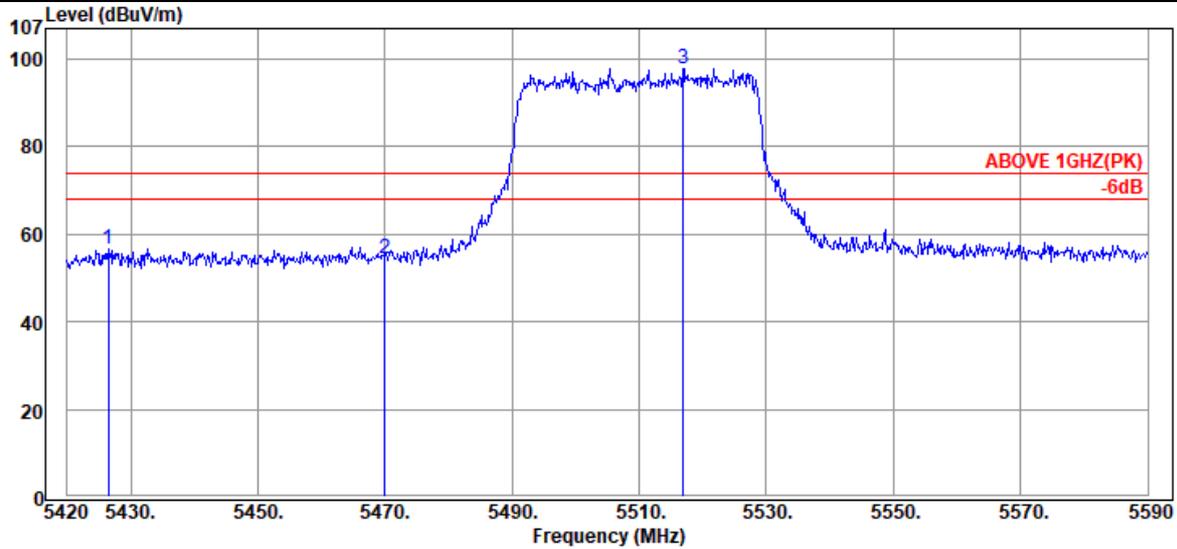

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.46	34.50	8.88	13.32	56.70	74.00	17.30	Peak
5469.98	34.50	8.91	11.15	54.56	74.00	19.44	Peak
@ 5516.90	34.53	8.93	54.32	97.78	---	---	Peak

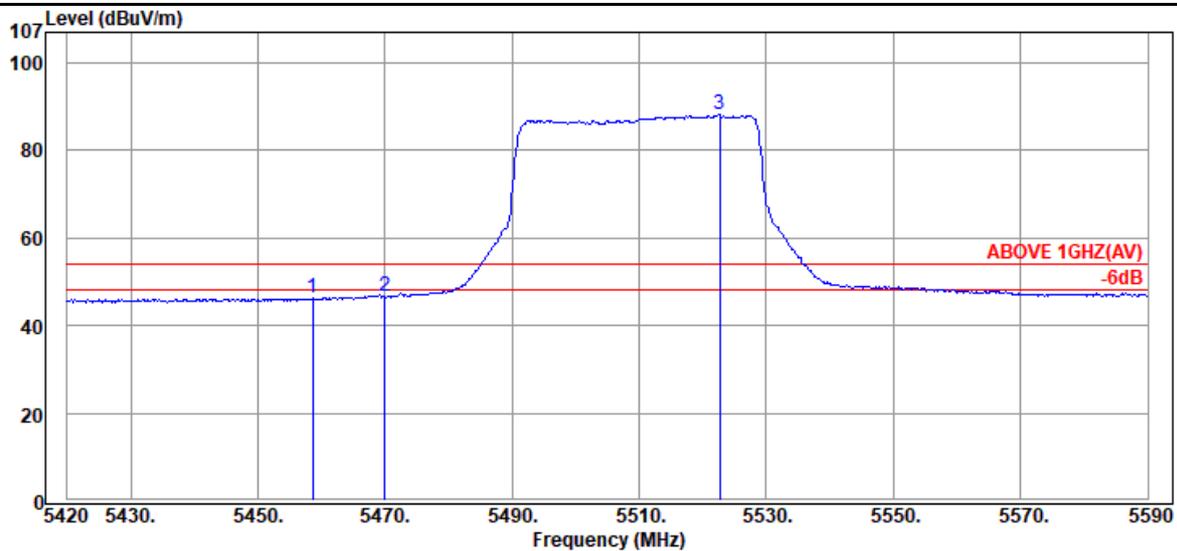


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.59	34.50	8.90	2.79	46.19	54.00	7.81	Average
5469.98	34.50	8.91	3.18	46.59	54.00	7.41	Average
@ 5522.68	34.55	8.93	44.71	88.19	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-I
RU Configuration	996/67	Frequency	TX 5250MHz

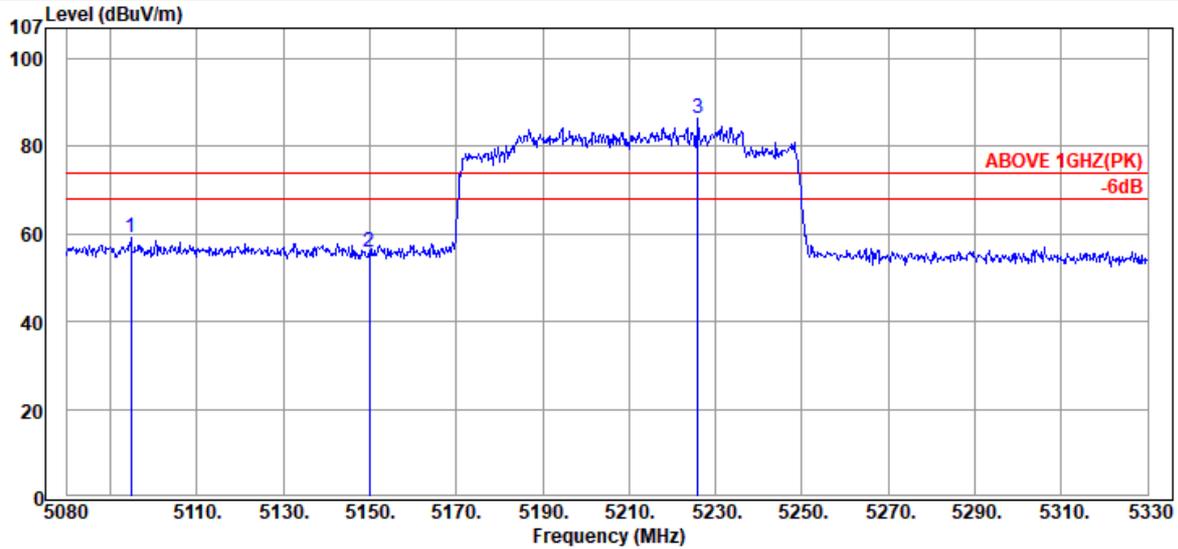

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5094.75	33.80	8.70	16.63	59.13	74.00	14.87	Peak
5150.00	33.90	8.73	13.37	56.00	74.00	18.00	Peak
@ 5226.00	34.26	8.77	43.32	86.35	---	---	Peak

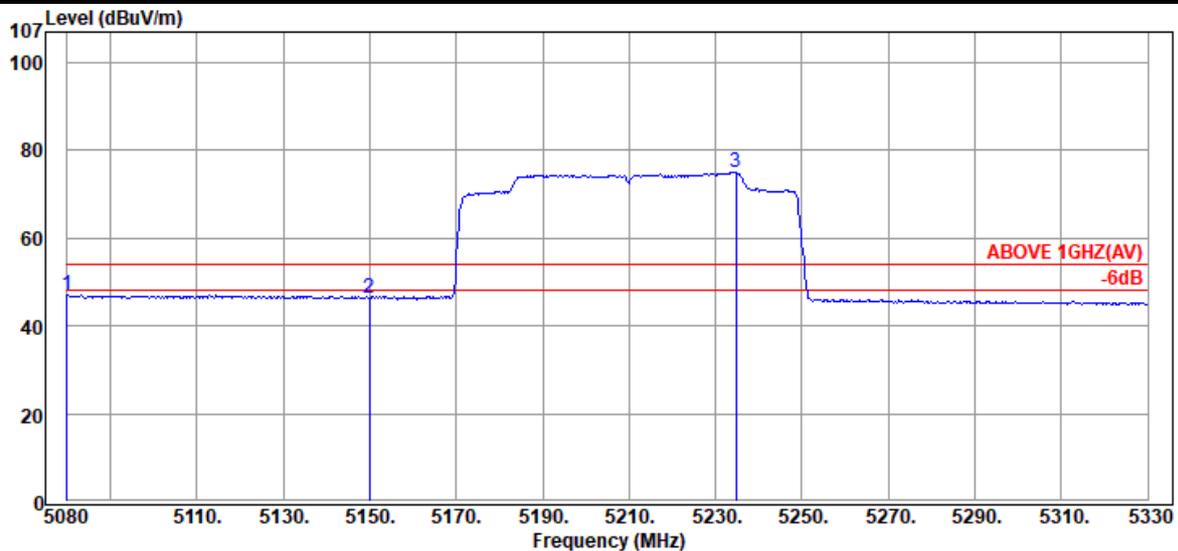


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5080.00	33.80	8.69	4.68	47.17	54.00	6.83	Average
5150.00	33.90	8.73	3.61	46.24	54.00	7.76	Average
@ 5234.75	34.31	8.78	31.95	75.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-I
RU Configuration	996/67	Frequency	TX 5250MHz

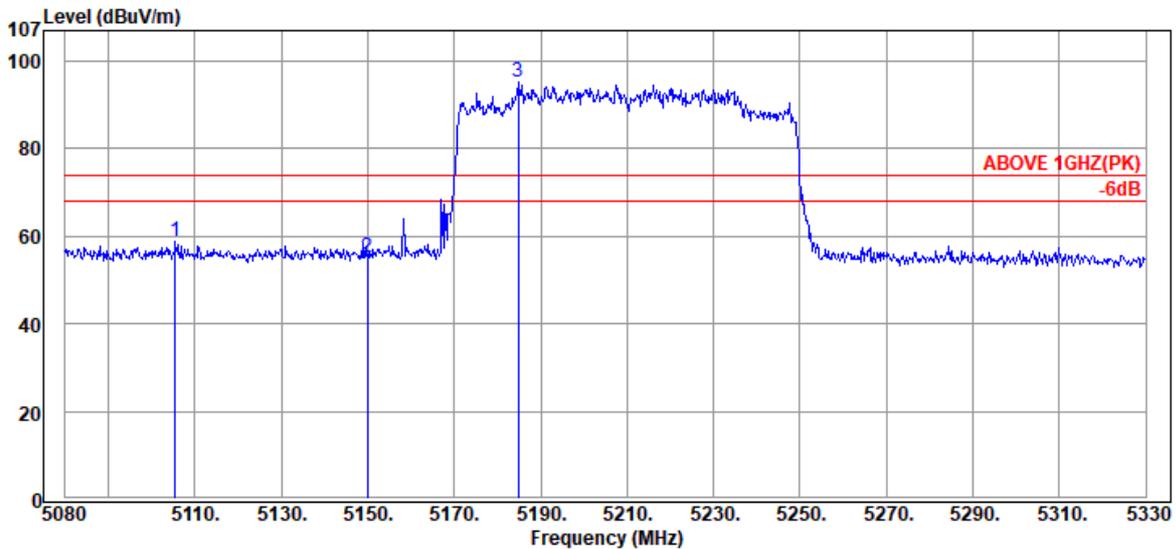

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5105.50	33.81	8.70	16.31	58.82	74.00	15.18	Peak
5150.00	33.90	8.73	12.55	55.18	74.00	18.82	Peak
@ 5184.75	34.04	8.75	52.42	95.21	---	---	Peak

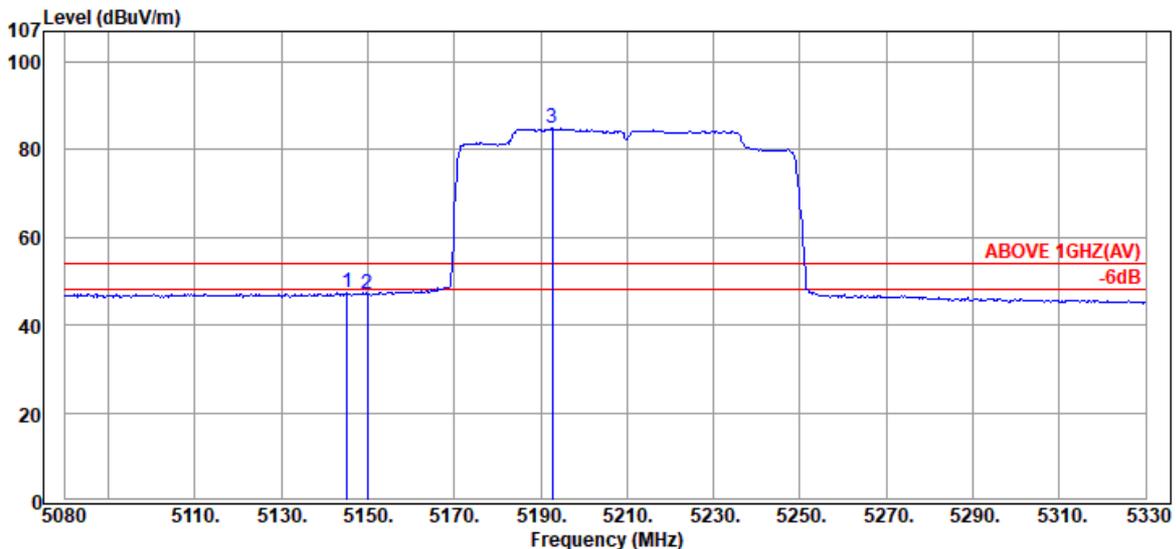


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.25	33.89	8.72	4.73	47.34	54.00	6.66	Average
5150.00	33.90	8.73	4.48	47.11	54.00	6.89	Average
@ 5192.75	34.07	8.75	41.97	84.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-I
RU Configuration	996/S67	Frequency	TX 5250MHz

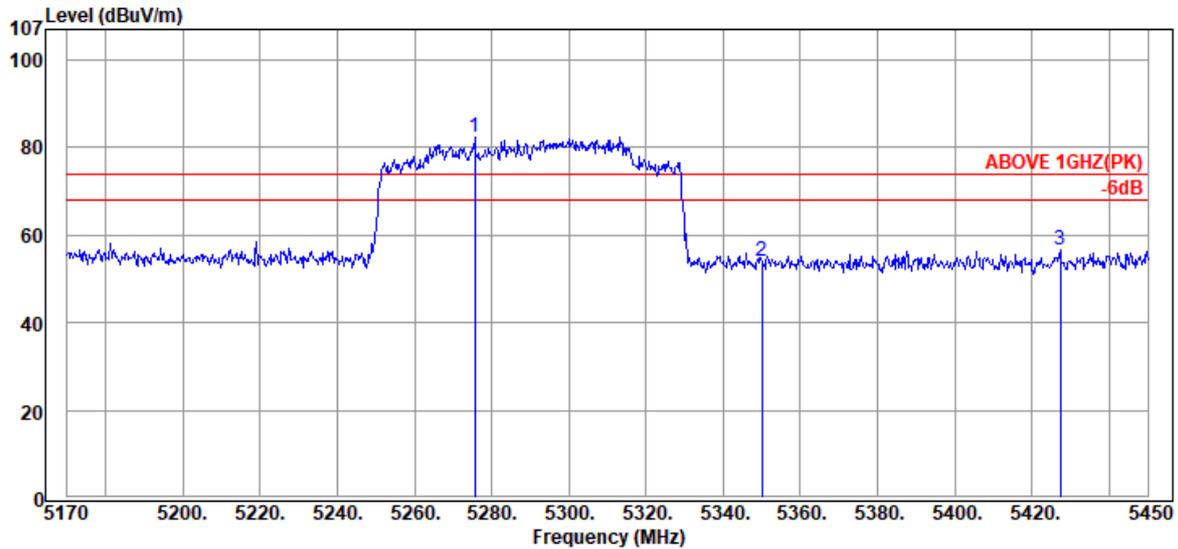

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5275.56	34.45	8.80	39.23	82.48	---	---	Peak
	5350.04	34.50	8.84	10.63	53.97	74.00	20.03	Peak
	5427.32	34.50	8.88	13.13	56.51	74.00	17.49	Peak

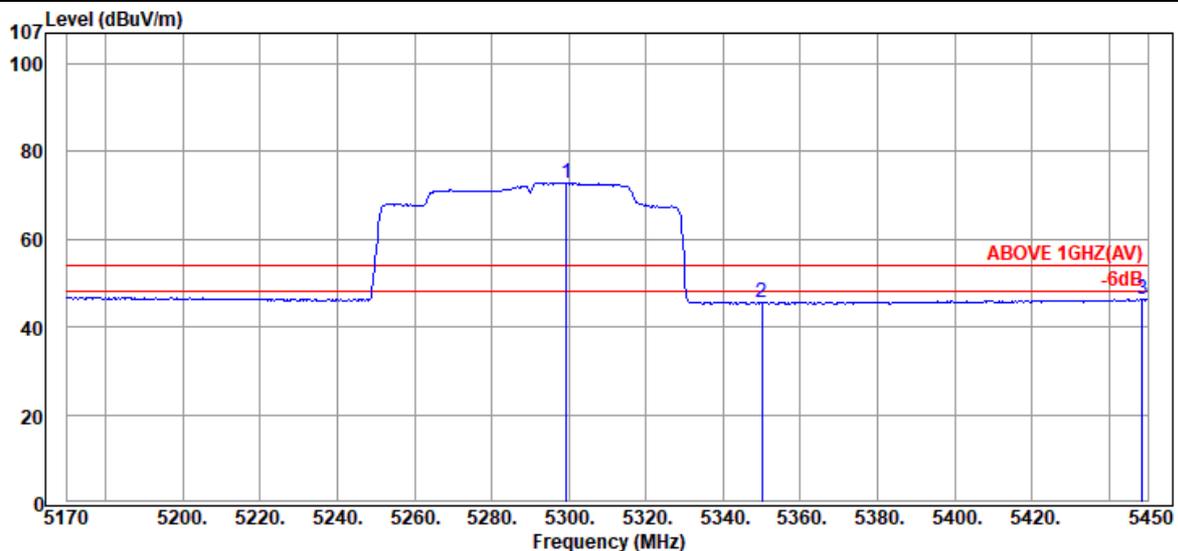


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5299.36	34.50	8.81	29.59	72.90	---	---	Average
	5350.04	34.50	8.84	2.10	45.44	54.00	8.56	Average
	5448.60	34.50	8.89	2.86	46.25	54.00	7.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-I
RU Configuration	996/S67	Frequency	TX 5250MHz

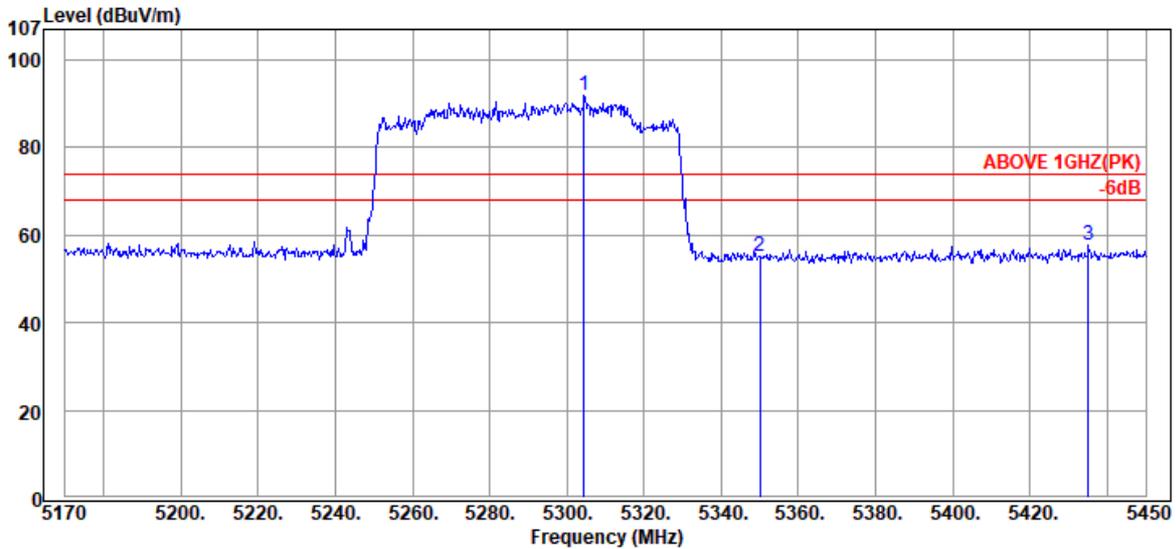

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5304.40	34.50	8.82	48.44	91.76	---	---	Peak
	5350.04	34.50	8.84	11.92	55.26	74.00	18.74	Peak
	5435.16	34.50	8.89	14.23	57.62	74.00	16.38	Peak

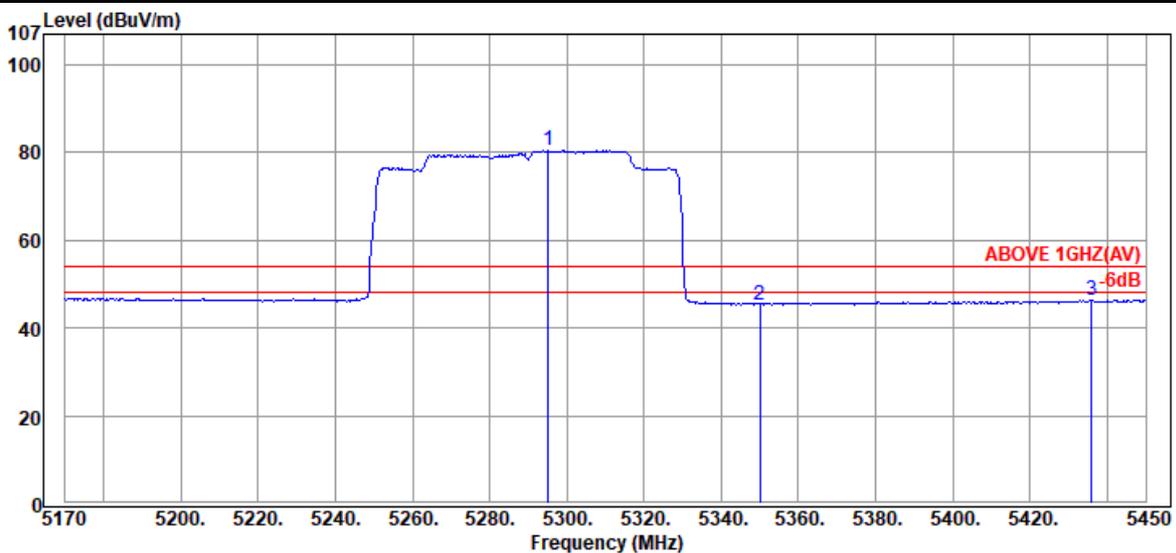


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5295.16	34.49	8.81	37.26	80.56	---	---	Average
	5350.04	34.50	8.84	2.06	45.40	54.00	8.60	Average
	5436.00	34.50	8.89	3.01	46.40	54.00	7.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

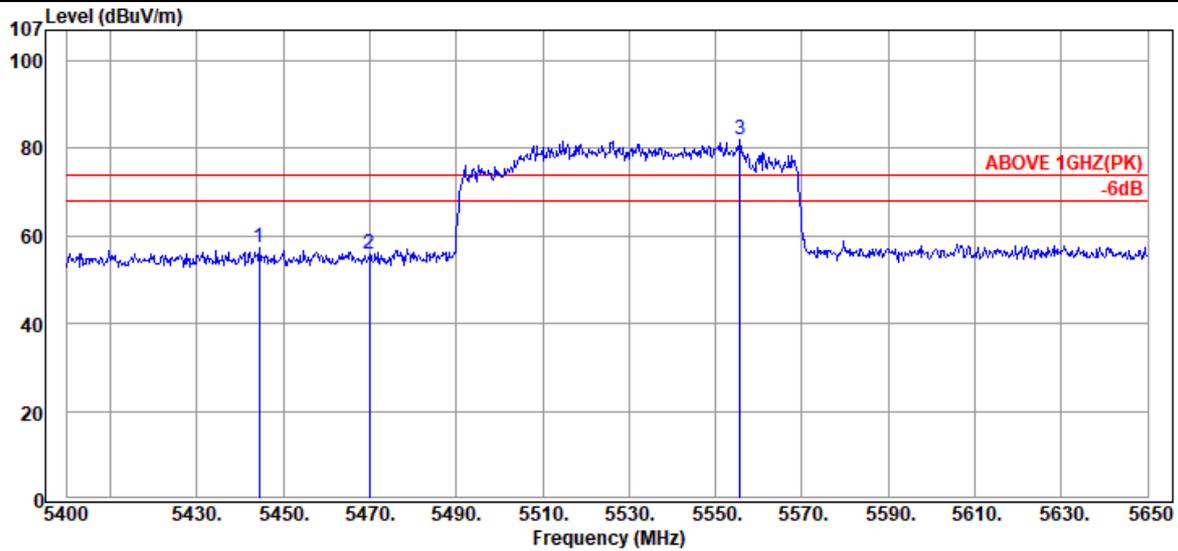

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.50	34.50	8.89	13.80	57.19	74.00	16.81	Peak
5470.00	34.50	8.91	12.56	55.97	74.00	18.03	Peak
@ 5555.75	34.61	8.95	38.27	81.83	---	---	Peak

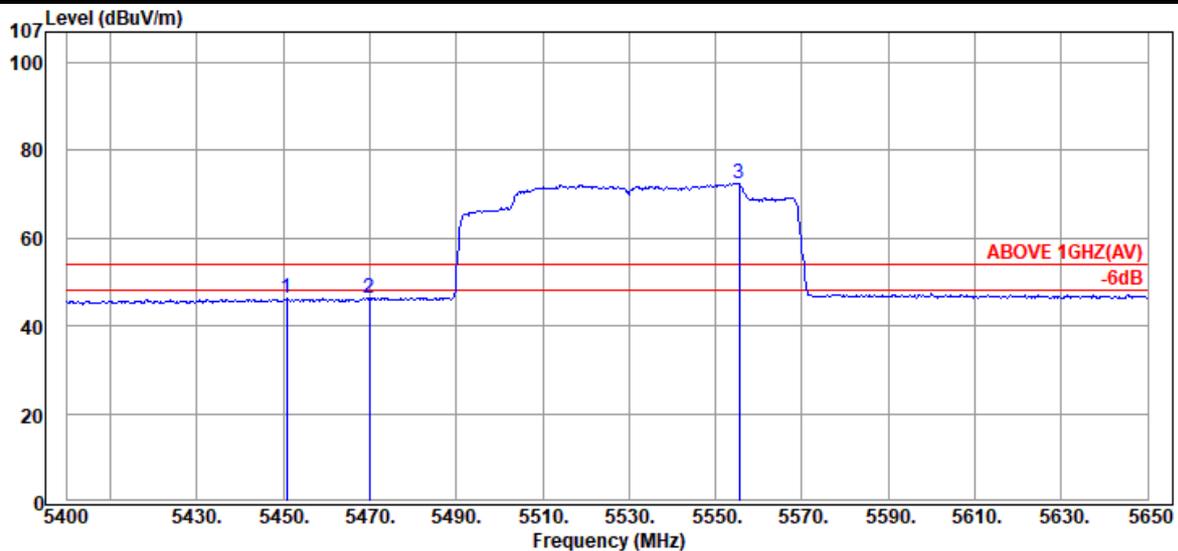


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.75	34.50	8.90	3.08	46.48	54.00	7.52	Average
5470.00	34.50	8.91	2.76	46.17	54.00	7.83	Average
@ 5555.50	34.61	8.95	28.89	72.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

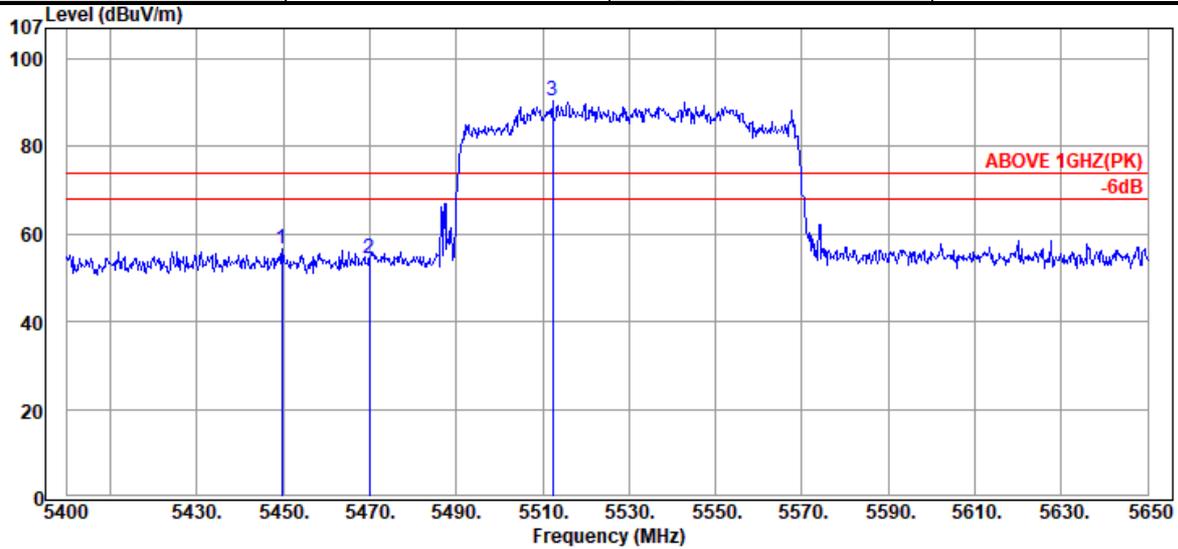

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.75	34.50	8.90	13.18	56.58	74.00	17.42	Peak
5470.00	34.50	8.91	10.94	54.35	74.00	19.65	Peak
@ 5512.25	34.52	8.93	46.85	90.30	---	---	Peak

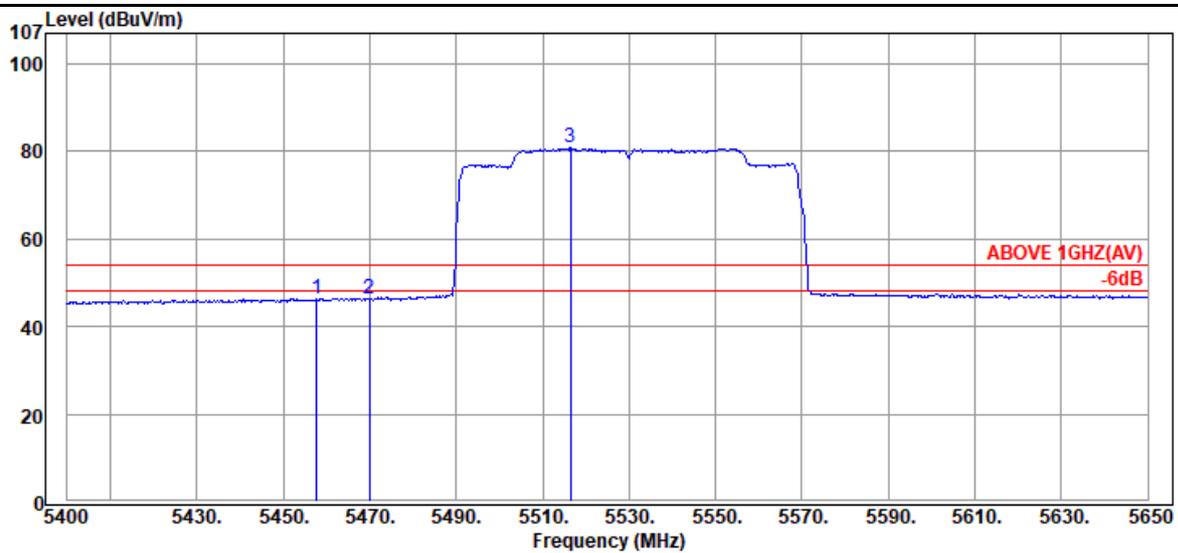


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.75	34.50	8.90	3.00	46.40	54.00	7.60	Average
5470.00	34.50	8.91	2.78	46.19	54.00	7.81	Average
@ 5516.50	34.53	8.93	37.30	80.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/S67	Frequency	TX 5570MHz

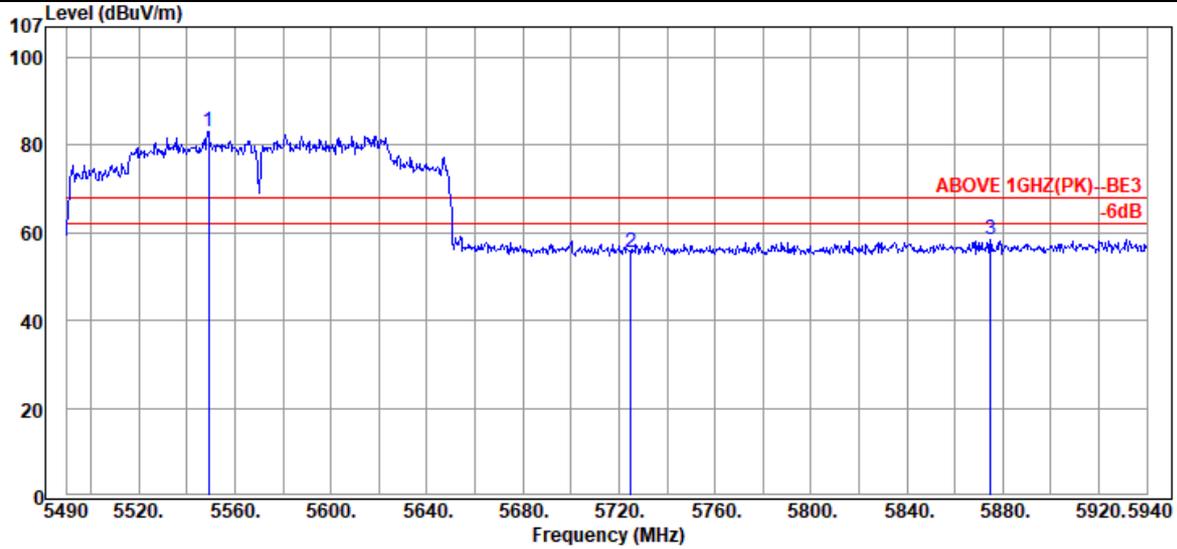

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5548.95	34.60	8.95	39.68	83.23	---	---	Peak
5724.90	34.40	9.04	11.91	55.35	68.20	12.85	Peak
@ 5874.75	34.45	9.12	14.83	58.40	68.20	9.80	Peak

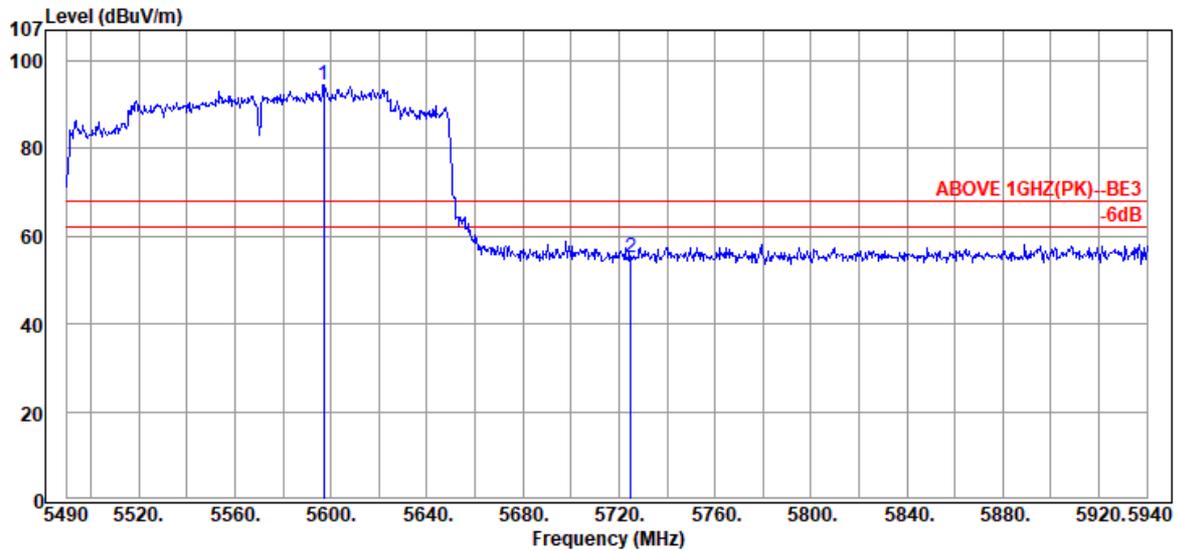

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5597.10	34.69	8.97	50.81	94.47	---	---	Peak
5724.90	34.40	9.04	11.60	55.04	68.20	13.16	Peak
@ 5940.00	34.74	9.15	14.22	58.11	68.20	10.09	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	UNII Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-1.49	48.71	54.00	5.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-1.68	48.52	54.00	5.48	Peak

Mode	802.11a	UNII Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-1.37	48.87	54.00	5.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-1.71	48.53	54.00	5.47	Peak

Mode	802.11a	UNII Band	NNII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11600.00	40.20	12.90	-3.55	49.55	54.00	4.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11600.00	40.20	12.90	-3.62	49.48	54.00	4.52	Peak

Mode	802.11a	UNII Band	NNII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-3.23	49.37	54.00	4.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-2.25	50.35	54.00	3.65	Peak

Mode	802.11a	UNII Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11490.00	40.07	12.75	-3.96	48.86	54.00	5.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11490.00	40.07	12.75	-3.55	49.27	54.00	4.73	Peak

Mode	802.11n-HT20	UNII Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-1.71	48.49	54.00	5.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-2.39	47.81	54.00	6.19	Peak

Mode	802.11n-HT20	UNII Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-1.83	48.41	54.00	5.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-1.02	49.22	54.00	4.78	Peak

Mode	802.11n-HT20	UNII Band	NNII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-3.09	48.49	54.00	5.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-3.13	48.45	54.00	5.55	Peak

Mode	802.11n-HT20	UNII Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-3.84	48.76	54.00	5.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-3.65	48.95	54.00	5.05	Peak

Mode	802.11n-HT20	UNII Band	NII-III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.00	40.17	12.86	-2.85	50.18	54.00	3.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.00	40.17	12.86	-3.39	49.64	54.00	4.36	Peak

Mode	802.11n-HT40	UNII Band	NII-I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.00	38.36	11.81	-1.81	48.36	54.00	5.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.00	38.36	11.81	-1.98	48.19	54.00	5.81	Peak

Mode	802.11n-HT40	UNII Band	NII-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.00	38.40	11.85	-1.02	49.23	54.00	4.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.00	38.40	11.85	-0.11	50.14	54.00	3.86	Peak

Mode	802.11n-HT40	UNII Band	NII-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.00	39.62	12.55	-3.39	48.78	54.00	5.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.00	39.62	12.55	-3.75	48.42	54.00	5.58	Peak

Mode	802.11n-HT40	UNII Band	NII-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.00	39.86	12.66	-3.86	48.66	54.00	5.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.00	39.86	12.66	-4.11	48.41	54.00	5.59	Peak

Mode	802.11n-HT40	UNII Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.00	40.19	12.88	-3.89	49.18	54.00	4.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.00	40.19	12.88	-3.81	49.26	54.00	4.74	Peak

Mode	802.11ac-VHT80	UNII Band	NII-I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10420.00	38.32	11.78	-2.35	47.75	54.00	6.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10420.00	38.32	11.78	-1.45	48.65	54.00	5.35	Peak

Mode	802.11ac-VHT80	UNII Band	NII-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10580.00	38.40	11.87	-3.08	47.19	54.00	6.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10580.00	38.40	11.87	-2.08	48.19	54.00	5.81	Peak

Mode	802.11ac-VHT80	UNII Band	NII-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.00	39.42	12.38	-3.71	48.09	54.00	5.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.00	39.42	12.38	-3.51	48.29	54.00	5.71	Peak

Mode	802.11ac-VHT80	UNII Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.00	39.74	12.60	-3.57	48.77	54.00	5.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.00	39.74	12.60	-3.22	49.12	54.00	4.88	Peak

Mode	802.11ac-VHT80	UNII Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.00	40.15	12.83	-3.47	49.51	54.00	4.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.00	40.15	12.83	-3.14	49.84	54.00	4.16	Peak

Mode	802.11ac-VHT160	UNII Band	NII-I
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.00	38.40	11.83	-2.45	47.78	54.00	6.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.00	38.40	11.83	-2.48	47.75	54.00	6.25	Peak

Mode	802.11ac-VHT160	UNII Band	NII-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.00	39.22	12.27	-3.23	48.26	54.00	5.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.00	39.22	12.27	-1.96	49.53	54.00	4.47	Peak

Mode	802.11ax-HE20	UNII Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-1.58	48.62	54.00	5.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.00	38.38	11.82	-2.07	48.13	54.00	5.87	Peak

Mode	802.11ax-HE20	UNII Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-1.95	48.29	54.00	5.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.00	38.40	11.84	-1.89	48.35	54.00	5.65	Peak

Mode	802.11ax-HE20	UNII Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-2.99	48.59	54.00	5.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.00	39.28	12.30	-2.25	49.33	54.00	4.67	Peak

Mode	802.11ax-HE20	UNII Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-4.74	47.86	54.00	6.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.00	39.92	12.68	-4.01	48.59	54.00	5.41	Peak

Mode	802.11ax-HE20	UNII Band	NII-III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.00	40.20	12.96	-5.05	48.11	54.00	5.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.00	40.20	12.96	-4.54	48.62	54.00	5.38	Peak

Mode	802.11ax-HE40	UNII Band	NII-I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.00	38.36	11.81	-2.06	48.11	54.00	5.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.00	38.36	11.81	-1.61	48.56	54.00	5.44	Peak

Mode	802.11ax-HE40	UNII Band	NII-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.00	38.40	11.85	-1.13	49.12	54.00	4.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.00	38.40	11.85	-1.43	48.82	54.00	5.18	Peak

Mode	802.11ax-HE40	UNII Band	NII-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.00	39.62	12.55	-3.75	48.42	54.00	5.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.00	39.62	12.55	-4.21	47.96	54.00	6.04	Peak

Mode	802.11ax-HE40	UNII Band	NII-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.00	39.86	12.66	-4.25	48.27	54.00	5.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.00	39.86	12.66	-4.13	48.39	54.00	5.61	Peak

Mode	802.11ax-HE40	UNII Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.00	40.19	12.88	-4.09	48.98	54.00	5.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.00	40.19	12.88	-3.29	49.78	54.00	4.22	Peak

Mode	802.11ax-HE80	UNII Band	NII-I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.00	38.32	11.78	-1.27	48.83	54.00	5.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.00	38.32	11.78	-1.38	48.72	54.00	5.28	Peak

Mode	802.11ax-HE80	UNII Band	NII-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.00	38.40	11.87	-1.25	49.02	54.00	4.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.00	38.40	11.87	-1.43	48.84	54.00	5.16	Peak

Mode	802.11ax-HE80	UNII Band	NII-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.00	39.42	12.38	-3.35	48.45	54.00	5.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11220.00	39.42	12.38	-3.14	48.66	54.00	5.34	Peak

Mode	802.11ax-HE80	UNII Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11380.00	39.74	12.60	-4.56	47.78	54.00	6.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11380.00	39.74	12.60	-3.82	48.52	54.00	5.48	Peak

Mode	802.11ax-HE80	UNII Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11550.00	40.15	12.83	-3.66	49.32	54.00	4.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11550.00	40.15	12.83	-3.23	49.75	54.00	4.25	Peak

Mode	802.11ax-HE160	UNII Band	NII-I
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.00	38.40	11.83	-2.22	48.01	54.00	5.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.00	38.40	11.83	-1.99	48.24	54.00	5.76	Peak

Mode	802.11ax-HE160	UNII Band	NII-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.00	39.22	12.27	-2.32	49.17	54.00	4.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.00	39.22	12.27	-3.33	48.16	54.00	5.84	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

A.3 26dB/6dB BANDWIDTH

Test Date	2019/09/23~10/3	Temp./Hum.	24°C/57%
Cable Loss	1.00dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 26dB/6dB Bandwidth Result

- For 26dB Bandwidth

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	NII-I	5180	22.81	16.805	Reference only
		5200	22.97	16.807	
		5240	23.88	16.796	
	NII-2A	5260	23.28	16.823	
		5300	22.95	16.805	
		5320	22.65	16.803	
	NII-2C	5500	23.54	16.807	
		5580	23.23	16.767	
		5700	23.08	16.870	
		5720	23.04	16.830	
802.11n-HT20	NII-I	5180	23.71	17.979	Reference only
		5200	23.62	17.944	
		5240	23.07	18.056	
	NII-2A	5260	23.53	17.940	
		5300	23.70	17.984	
		5320	23.51	17.953	
	NII-2C	5500	23.87	18.008	
		5580	25.08	17.995	
		5700	24.13	17.941	
		5720	24.57	18.035	

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11n-HT40	NII-I	5190	43.90	36.525	Reference only
		5230	44.43	36.413	
	NII-2A	5270	44.39	36.422	
		5310	43.23	36.372	
	NII-2C	5510	43.15	36.419	
		5550	42.94	36.401	
		5670	43.38	36.409	
802.11ac-VHT80	NII-I	5210	83.82	75.168	Reference only
	NII-2A	5290	84.27	75.078	
	NII-2C	5530	84.12	75.110	
		5610	83.55	75.154	
		5690	83.09	75.118	
802.11ac-VHT160	NII-I	5250	163.50	153.050	Reference only
	NII-2A				
	NII-2C	5570	162.60	153.080	

Mode	UNII Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-I	5180	24.43	19.033	Reference only
		5200	23.80	19.067	
		5240	23.57	19.038	
	NII-2A	5260	23.66	19.099	
		5300	24.21	19.084	
		5320	23.91	19.124	
	NII-2C	5500	24.21	19.120	
		5580	23.15	19.073	
		5700	23.74	19.095	
		5720	23.95	19.073	
802.11ax-HE40	NII-I	5190	42.11	37.738	Reference only
		5230	42.47	37.818	
	NII-2A	5270	42.56	37.861	
		5310	43.47	37.854	
	NII-2C	5510	42.03	37.840	
		5550	42.74	37.768	
		5670	41.08	37.850	
		5710	42.61	37.787	
802.11ax-HE80	NII-I	5210	81.78	76.665	Reference only
	NII-2A	5290	81.97	76.571	
	NII-2C	5530	81.83	76.536	
		5610	81.00	76.499	
		5690	82.38	76.536	
802.11ax-HE160	NII-I	5250	162.50	154.73	Reference only
	NII-2A				
	NII-2C	5570	163.50	155.11	

Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-I	5180	26/10	19.87	18.456	Reference only
			52/37	20.20	18.204	
			106/53	20.86	18.233	
	NII-2A	5320	26/8	20.14	18.518	
			52/40	21.49	18.158	
			106/54	20.57	17.889	
	NII-2C	5500	26/10	20.27	18.583	
			52/37	20.87	18.215	
			106/53	20.89	18.236	
5700		26/8	19.65	18.236		
		52/40	21.11	18.404		
		106/54	21.62	18.220		
802.11ax-HE40	NII-I	5190	242/61	23.43	18.846	Reference only
	NII-2A	5310	242/62	25.43	18.771	
	NII-2C	5510	242/61	24.54	18.796	
		5670	242/62	23.92	18.841	
802.11ax-HE80	NII-I	5210	484/65	41.80	37.553	Reference only
	NII-2A	5290	484/66	40.97	37.466	
	NII-2C	5530	484/65	42.78	37.403	
		5610	484/66	41.89	37.561	
802.11ax-HE160	NII-I/ NII-2A	5250	996/67	81.81	76.779	Reference only
			996/S67	81.49	76.969	
	NII-2C	5570	996/67	81.68	76.461	
			996/S67	81.49	76.802	


● For 6dB Bandwidth


Mode	UNII Band	Centre Frequency (MHz)	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	NII-III	5745	16.39	16.597	≥ 500kHz
		5785	16.43	16.581	
		5825	16.38	16.571	
802.11n-HT20	NII-III	5745	17.60	17.747	
		5785	17.81	17.821	
		5825	17.79	17.798	
802.11n-HT40	NII-III	5755	36.38	36.296	
		5795	36.42	36.311	
802.11ac-VHT80	NII-III	5775	52.67	75.108	
802.11ax-HE20	NII-III	5745	19.00	19.012	
		5785	19.07	18.984	
		5825	18.34	19.010	
802.11ax-HE40	NII-III	5755	38.03	37.798	
		5795	37.75	37.775	
802.11ax-HE80	NII-III	5775	68.96	76.654	


Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-III	5745	26/10	17.03	18.063	≥ 500kHz
			52/37	17.04	18.137	
			106/53	17.04	18.063	
	NII-III	5825	26/8	2.050	18.502	
			52/40	16.97	17.979	
			106/54	17.14	18.304	
802.11ax-HE40	NII-III	5755	242/61	18.89	18.803	
	NII-III	5795	242/62	18.74	18.805	
802.11ax-HE80	NII-III	5775	484/65	37.69	37.459	
			484/66	37.68	37.422	


A.3.2 Measurement Plots

- For 26dB Bandwidth

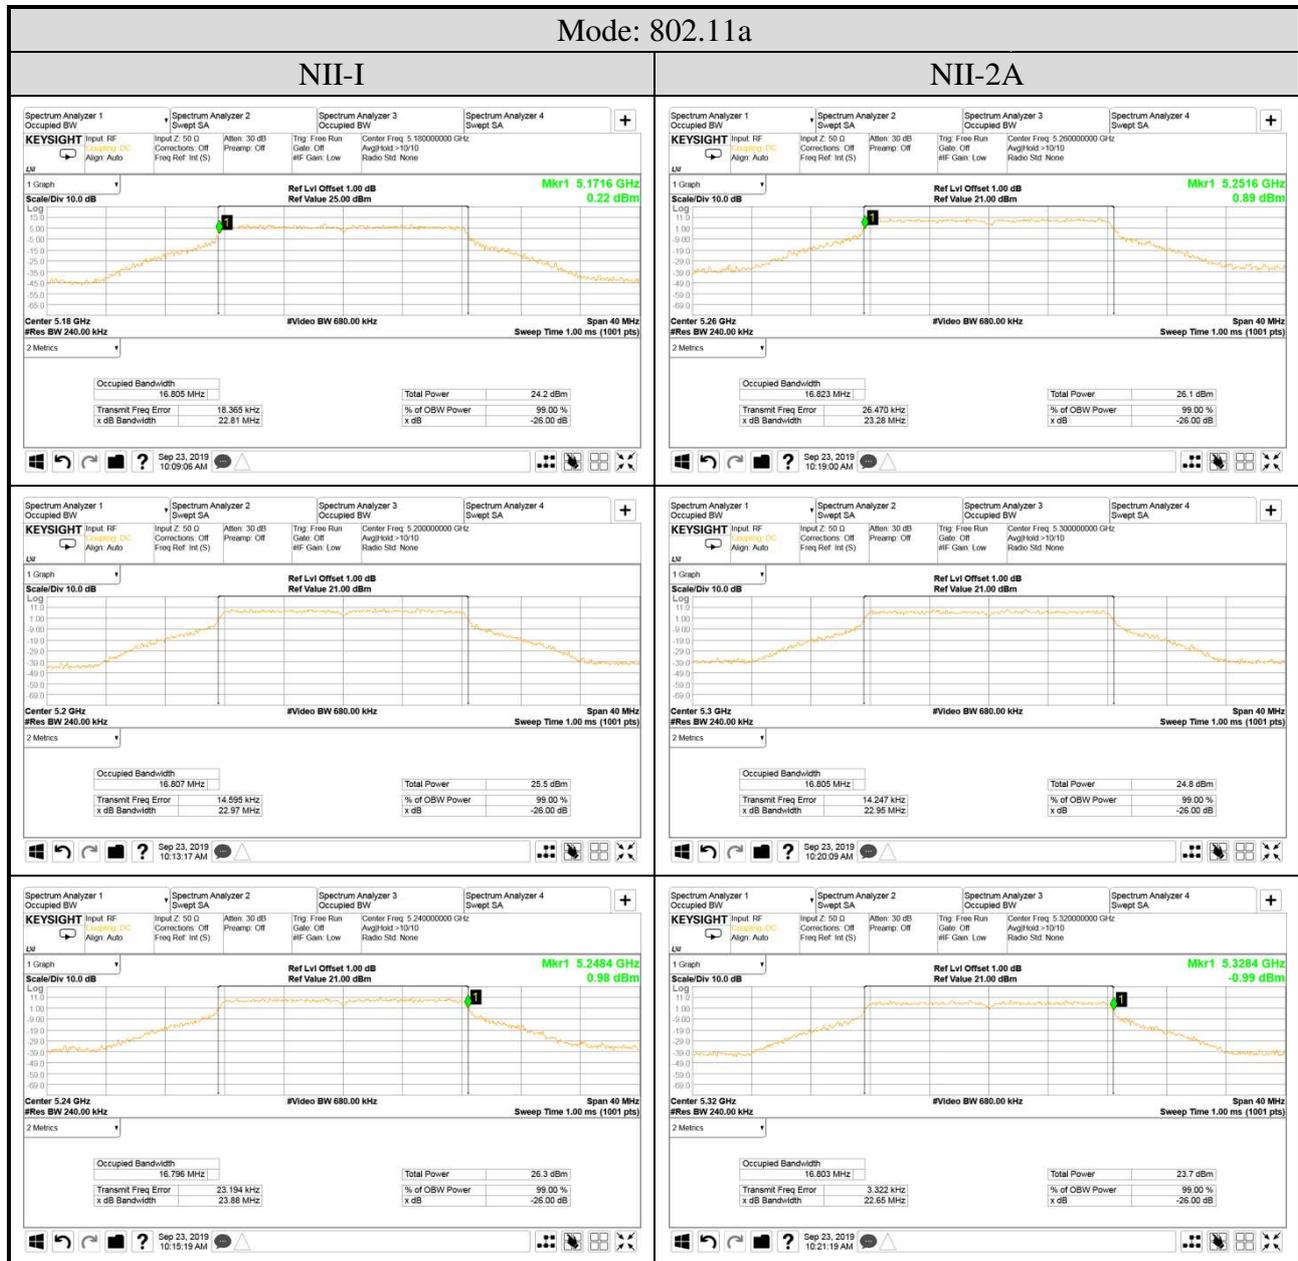

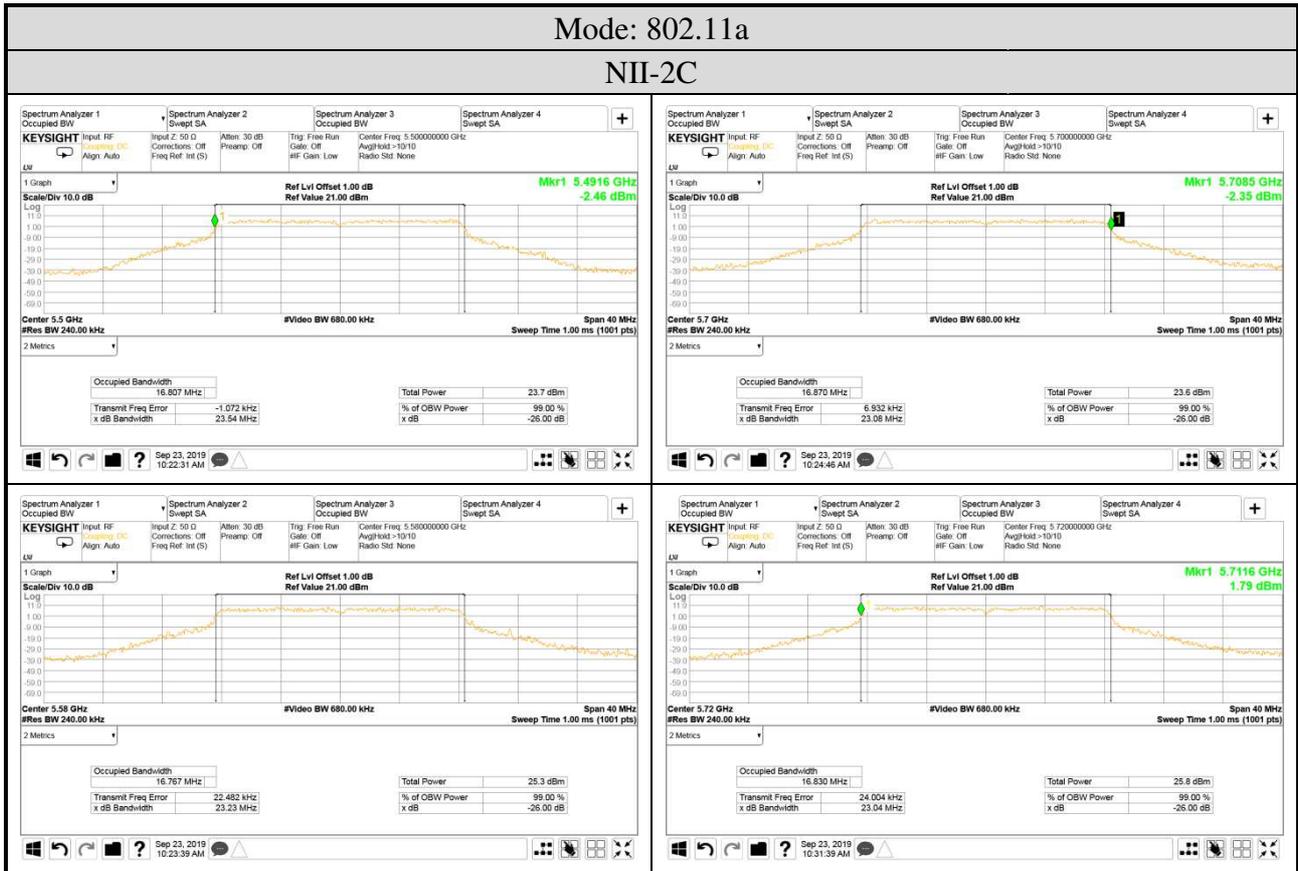

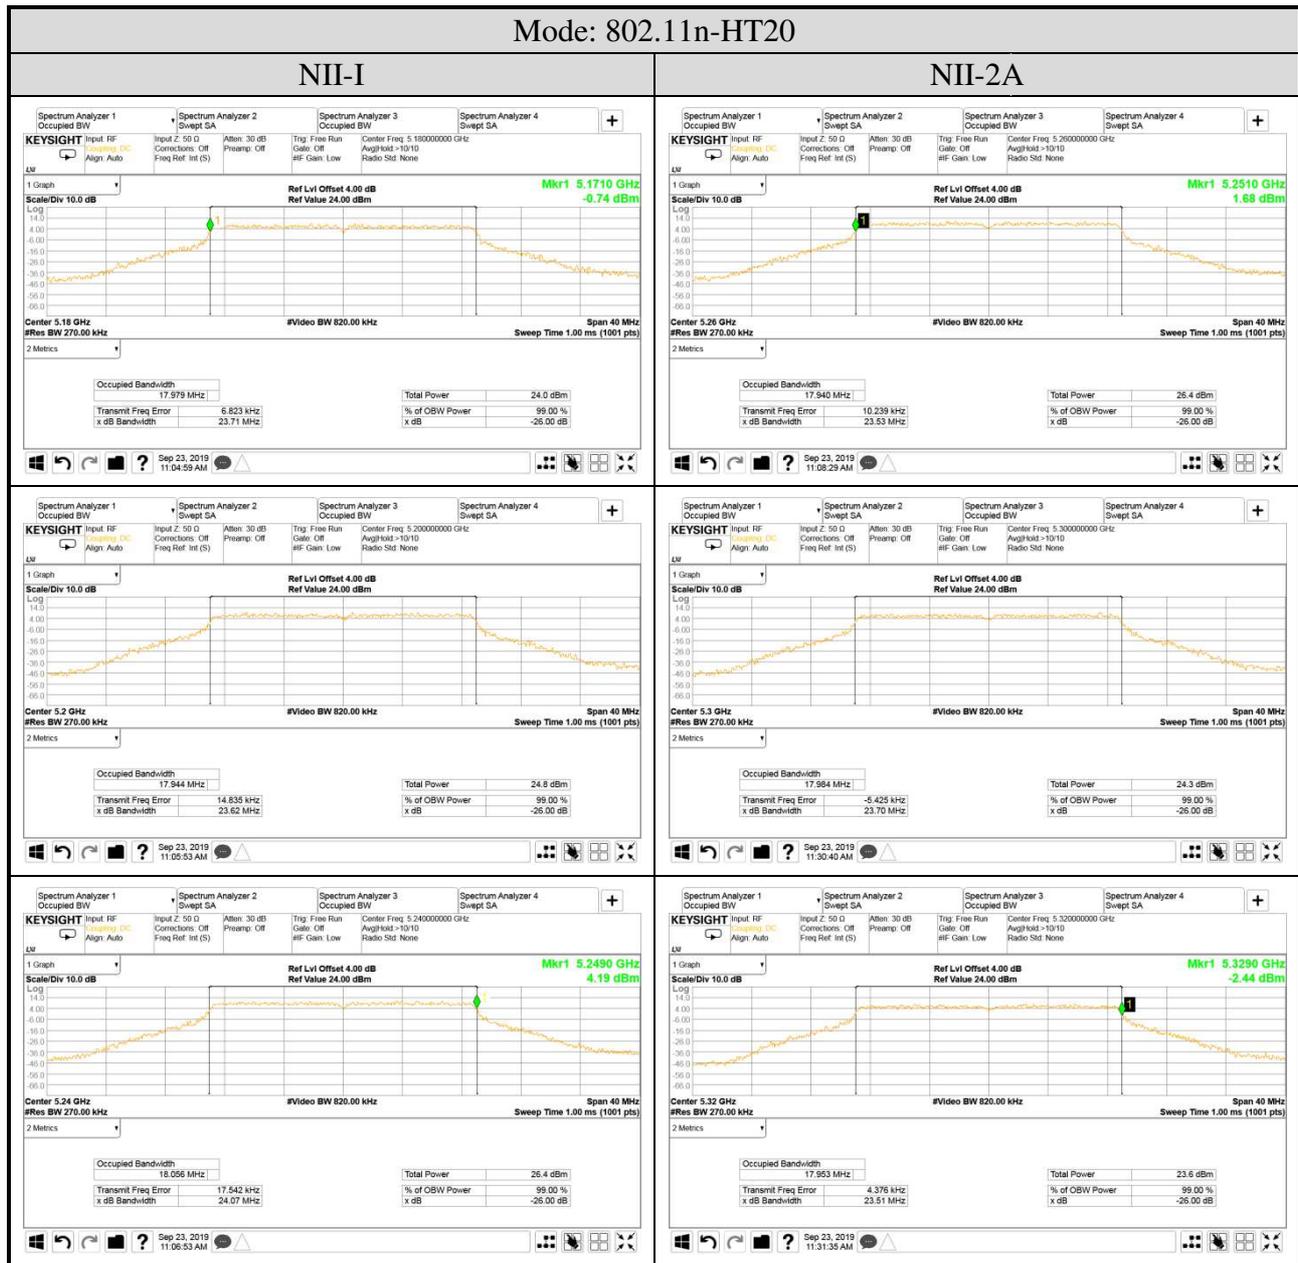

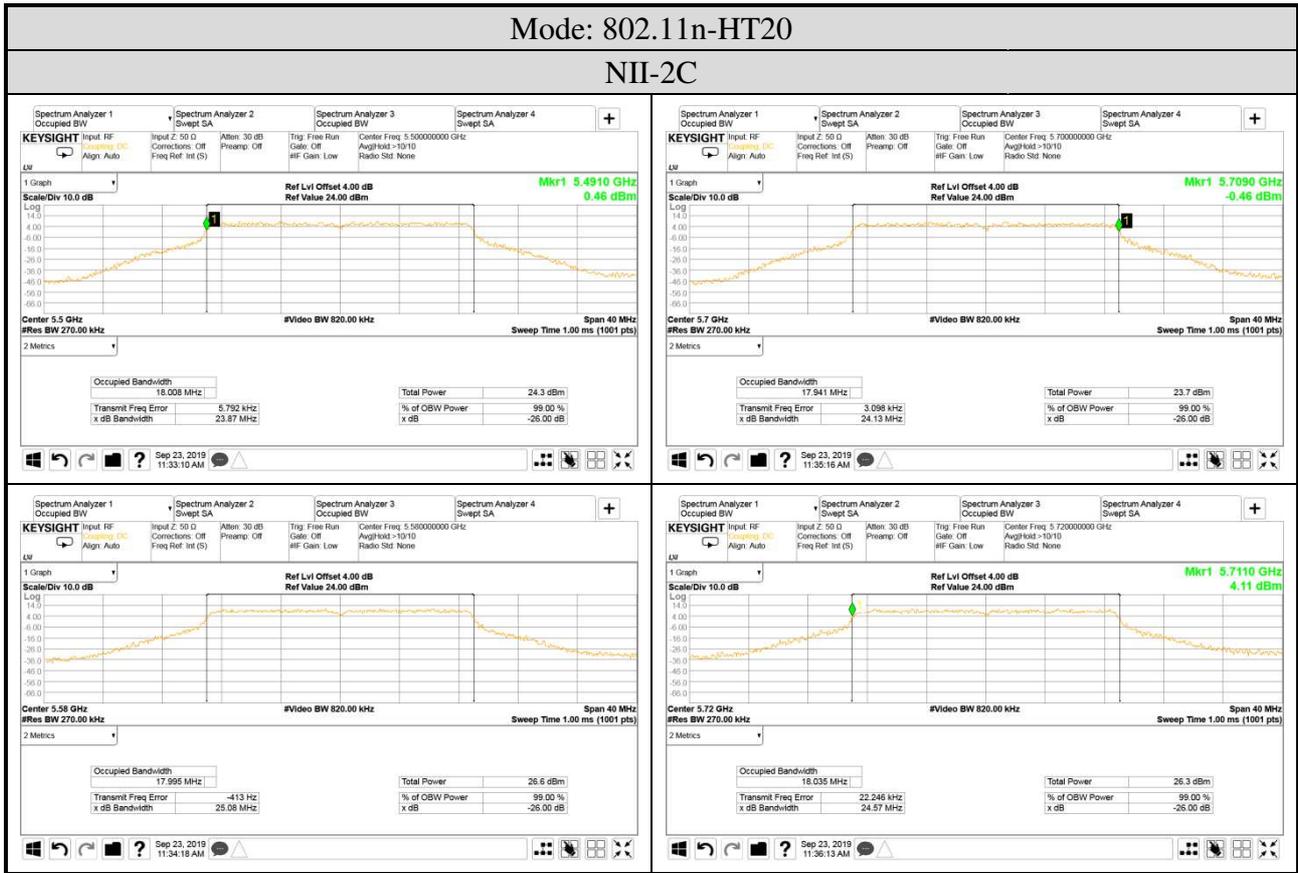



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX B

TEST PHOTOGRAPHS

(Model: 15Z995)