

## A.4 MAXIMUM OUTPUT POWER

Test Date	2019/09/20, 25, 26, 10/3 10/4, 12/25	Temp./Hum.	23~24°C/47~61%
Cable Loss	1.00dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

### A.4.1 Average Output Power

Mode	UNII Band	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11a	NII-I	5180	18.20	18.09	N/A	18.20	0.066	< 250 mW (24 dBm)
		5200	18.86	18.72		18.86	0.077	
		5240	19.89	19.72		19.89	0.097	
	NII-2A	5260	19.96	19.94		19.96	0.099	
		5300	18.98	18.77		18.98	0.079	
		5320	18.26	17.90		18.26	0.067	
	NII-2C	5500	18.49	18.29		18.49	0.071	
		5580	19.92	19.61		19.92	0.098	
		5700	17.75	18.26		18.26	0.067	
	NII-III	5720	20.01	19.71		20.01	0.100	
		5745	19.85	20.08		20.08	0.102	
		5785	19.72	20.01		20.01	0.100	< 1 W (30 dBm)
5825	19.67	19.79	19.79	0.095				

Note: The results have been included cable loss.

### SPOT CHECK

Mode	UNII Band	Centre Frequency (MHz)	Average Output Power (dBm)		10log (1/X)	Max Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11a	NII-I	5180	17.98	17.78	N/A	17.98	0.063	< 250 mW (24 dBm)
		5200	19.22	18.63		19.22	0.084	
		5240	19.83	19.70		19.83	0.096	
	NII-2A	5260	20.13	20.29		20.29	0.107	
		5300	18.98	19.10		19.10	0.081	
		5320	18.60	18.24		18.60	0.072	
	NII-2C	5500	17.18	16.56		17.18	0.052	
		5580	18.16	18.83		18.83	0.076	
		5700	16.64	16.85		16.85	0.048	
	NII-III	5720	18.63	18.58		18.63	0.073	
		5745	19.90	20.19		20.19	0.104	
		5785	20.12	19.69		20.12	0.103	< 1 W (30 dBm)
5825	20.05	19.66	20.05	0.101				

Note: 1. The results have been included cable loss.

- This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

Mode	UNII Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11n-HT20	NII-I	5180	15.58	15.33	N/A	18.47	0.070	< 250 mW (24 dBm)
		5200	16.23	16.04		19.15	0.082	
		5240	17.46	17.18		20.33	0.108	
	NII-2A	5260	17.61	17.49		20.56	0.114	
		5300	16.35	16.07		19.22	0.084	
		5320	15.41	15.19		18.31	0.068	
	NII-2C	5500	15.82	15.55		18.70	0.074	
		5580	17.52	17.29		20.42	0.110	
		5700	15.11	14.57		17.86	0.061	
		5720	17.49	17.21		20.36	0.109	
	NII-III	5745	17.26	17.24		20.26	0.106	
		5785	17.35	17.25		20.31	0.107	
5825		17.28	17.26	20.28	0.107			
802.11n-HT40	NII-I	5190	15.81	15.51	N/A	18.67	0.074	< 250 mW (24 dBm)
		5230	17.35	17.11		20.24	0.106	
	NII-2A	5270	16.69	16.61		19.66	0.092	
		5310	14.78	14.52		17.66	0.058	
	NII-2C	5510	15.10	14.69		17.91	0.062	
		5550	15.89	15.65		18.78	0.076	
		5670	17.35	16.88		20.13	0.103	
		5710	17.98	17.55		20.78	0.120	
	NII-III	5755	17.68	17.65		20.68	0.117	
		5795	17.78	17.74		20.77	0.119	
802.11ac-VHT80	NII-I	5210	16.10	15.75	N/A	18.94	0.078	< 250 mW (24 dBm)
	NII-2A	5290	14.79	14.58		17.70	0.059	
		NII-2C	5530	15.64		15.24	18.45	
	5610		17.83	17.64		20.75	0.119	
	5690		18.19	17.84		21.03	0.127	
	NII-III	5775	16.50	16.53		19.53	0.090	
802.11ac-VHT160	NII-I/NII-2A	5250	11.94	11.84	N/A	14.90	0.031	< 250 mW (24 dBm)
	NII-2C	5570	11.51	11.39		14.46	0.028	

Note: The results have been included cable loss.

**SPOT CHECK**

Mode	UNII Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11n-HT20	NII-I	5180	15.74	15.78	N/A	18.77	0.075	< 250 mW (24 dBm)
		5200	16.00	15.95		18.99	0.079	
		5240	17.78	17.48		20.64	0.116	
	NII-2A	5260	17.47	17.41		20.45	0.111	
		5300	16.11	15.75		18.94	0.078	
		5320	14.97	15.31		18.15	0.065	
	NII-2C	5500	14.32	13.93		17.14	0.052	
		5580	16.32	15.84		19.10	0.081	
		5700	13.71	12.67		16.23	0.042	
		5720	15.43	15.63		18.54	0.071	
	NII-III	5745	17.32	16.77		20.06	0.101	
		5785	17.62	17.61		20.63	0.116	
5825		17.04	16.97	20.02	0.100			
802.11n-HT40	NII-I	5190	15.92	15.03	N/A	18.51	0.071	< 250 mW (24 dBm)
		5230	17.17	17.62		20.41	0.110	
	NII-2A	5270	16.85	16.54		19.71	0.094	
		5310	14.93	14.11		17.55	0.057	
	NII-2C	5510	13.48	13.16		16.33	0.043	
		5550	14.15	14.04		17.11	0.051	
		5670	15.59	14.86		18.25	0.067	
		5710	16.32	16.14		19.24	0.084	
	NII-III	5755	17.43	17.80		20.63	0.116	
		5795	17.61	17.72		20.68	0.117	
802.11ac-VHT80	NII-I	5210	15.62	15.46	N/A	18.55	0.072	< 250 mW (24 dBm)
	NII-2A	5290	15.03	14.63		17.84	0.061	
		NII-2C	5530	15.35		15.24	18.31	
	5610		16.18	15.74		18.98	0.079	
	5690	17.11	16.58	19.86		0.097		
	NII-III	5775	16.68	17.01		19.86	0.097	
802.11ac-VHT160	NII-I/II-2A	5250	12.17	12.02	N/A	15.11	0.032	< 250 mW (24 dBm)
	II-2C	5570	11.69	11.53		14.62	0.029	

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

Mode	UNII Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE20	NII-I	5180	15.51	15.28	N/A	18.41	0.069	< 250 mW (24 dBm)
		5200	16.21	15.95		19.09	0.081	
		5240	17.37	17.22		20.31	0.107	
	NII-2A	5260	17.47	17.44		20.47	0.111	
		5300	16.22	16.01		19.13	0.082	
		5320	15.31	15.06		18.20	0.066	
	NII-2C	5500	15.76	15.46		18.62	0.073	
		5580	17.38	17.27		20.34	0.108	
		5700	15.01	14.45		17.75	0.060	
		5720	17.36	17.12		20.25	0.106	
	NII-III	5745	17.10	17.07		20.10	0.102	
		5785	17.22	17.16		20.20	0.105	
5825		17.17	17.13	20.16	0.104			
802.11ax-HE40	NII-I	5190	15.59	15.37	18.49	0.071	< 250 mW (24 dBm)	
		5230	17.11	16.94	20.04	0.101		
	NII-2A	5270	16.45	16.32	19.40	0.087		
		5310	14.47	14.26	17.38	0.055		
	NII-2C	5510	14.87	14.47	17.68	0.059		
		5550	15.67	15.44	18.57	0.072		
		5670	17.03	16.61	19.84	0.096		
		5710	17.73	17.30	20.53	0.113		
	NII-III	5755	17.41	17.34	20.39	0.109		
		5795	17.52	17.43	20.49	0.112		
802.11ax-HE80	NII-I	5210	15.55	15.57	18.57	0.072	< 250 mW (24 dBm)	
	NII-2A	5290	14.33	14.34	17.35	0.054		
		5530	15.28	15.01	18.16	0.065		
	NII-2C	5610	17.71	17.47	20.60	0.115		
		5690	17.98	17.62	20.81	0.121		
	NII-III	5775	16.20	16.27	19.25	0.084		
802.11ax-HE160	NII-I/NII-2A	5250	11.65	11.58	14.63	0.029	< 250 mW (24 dBm)	
	NII-2C	5570	11.23	11.15	14.20	0.026		

Note: The results have been included cable loss.

**SPOT CHECK**

Mode	UNII Band	Centre Frequency (MHz)	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
			Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE20	NII-I	5180	15.24	15.41	N/A	18.34	0.069	< 250 mW (24 dBm)
		5200	15.99	16.15		19.08	0.081	
		5240	17.30	17.47		20.40	0.107	
	NII-2A	5260	17.25	17.82		20.55	0.111	
		5300	16.56	15.74		19.18	0.082	
		5320	15.22	14.83		18.04	0.067	
	NII-2C	5500	13.84	14.51		17.20	0.072	
		5580	15.81	15.61		18.72	0.109	
		5700	13.52	13.14		16.34	0.060	
		5720	15.53	15.46		18.51	0.106	
	NII-III	5745	16.90	17.40		20.17	0.103	
		5785	16.97	16.93		19.96	0.106	
5825		17.66	16.90	20.31	0.104			
802.11ax-HE40	NII-I	5190	15.41	15.26	N/A	18.35	0.068	< 250 mW (24 dBm)
		5230	17.40	17.17		20.30	0.107	
	NII-2A	5270	16.31	16.25		19.29	0.085	
		5310	13.97	14.64		17.33	0.054	
	NII-2C	5510	13.76	13.26		16.53	0.045	
		5550	14.19	14.04		17.13	0.052	
		5670	15.87	15.10		18.51	0.071	
		5710	16.12	16.29		19.22	0.084	
	NII-III	5755	17.25	17.38		20.33	0.108	
		5795	17.83	17.43		20.64	0.116	
802.11ax-HE80	NII-I	5210	15.16	15.94	N/A	18.58	0.072	< 250 mW (24 dBm)
	NII-2A	5290	14.91	14.19		17.58	0.057	
	NII-2C	5530	14.05	13.51		16.80	0.048	
		5610	16.32	15.61		18.99	0.079	
		5690	16.56	16.29		19.44	0.088	
	NII-III	5775	16.38	16.56		19.48	0.089	
802.11ax-HE160	NII-I/II-2A	5250	11.73	12.12	N/A	14.94	0.031	< 250 mW (24 dBm)
	NII-2C	5570	11.54	10.99		14.28	0.027	

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
				Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE20	NII-I	5180	26/0	11.43	11.18	N/A	14.32	0.027	< 250 mW (24 dBm)
			52/37	14.45	14.25		17.36	0.054	
			106/53	15.68	15.46		18.58	0.072	
	NII-2A	5320	26/8	11.82	11.63		14.74	0.030	
			52/40	12.06	11.92		15.00	0.032	
			106/54	15.55	15.35		18.46	0.070	
	NII-2C	5500	26/0	11.74	11.43		14.60	0.029	
			52/37	14.76	14.48		17.63	0.058	
			106/53	15.78	15.64		18.72	0.074	
		5700	26/8	11.89	11.42		14.67	0.029	
			52/40	13.06	12.59		15.84	0.038	
			106/54	14.72	14.17		17.46	0.056	
	NII-III	5745	26/0	11.58	11.45		14.53	0.028	
			52/37	14.60	14.54		17.58	0.057	
			106/53	17.17	17.15		20.17	0.104	
		5825	26/8	16.65	16.42		19.55	0.090	
52/40			16.86	16.68	19.78	0.095			
106/54			16.96	16.64	19.81	0.096			
802.11ax-HE40	NII-I	5190	242/61	15.42	15.34	18.39	0.069	< 250 mW (24 dBm)	
	NII-2A	5310	242/62	14.59	14.36	17.49	0.056		
	NII-2C	5510	242/61	15.05	14.75	17.91	0.062		
		5670	242/62	16.98	16.64	19.82	0.096		
	NII-III	5755	242/61	17.03	17.02	20.04	0.101	< 1 W (30 dBm)	
		5795	242/62	16.98	16.96	19.98	0.100		

Note: The results have been included cable loss.

**SPOT CHECK**

Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
				Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE20	NII-I	5180	26/0	11.24	11.65	N/A	14.46	0.027	< 250 mW (24 dBm)
			52/37	14.37	13.74		17.08	0.055	
			106/53	15.40	15.29		18.36	0.072	
	NII-2A	5320	26/8	12.03	11.29		14.69	0.029	
			52/40	11.48	11.49		14.50	0.032	
			106/54	15.44	15.22		18.34	0.070	
	NII-2C	5500	26/0	12.10	11.07		14.63	0.029	
			52/37	14.32	13.00		16.72	0.058	
			106/53	14.18	13.98		17.09	0.074	
		5700	26/8	11.92	11.55		14.75	0.029	
			52/40	13.28	12.42		15.88	0.038	
			106/54	13.19	13.00		16.11	0.056	
	NII-III	5745	26/0	12.15	11.31		14.76	0.028	
			52/37	14.58	14.92		17.76	0.057	
			106/53	17.09	17.01		20.06	0.103	
		5825	26/8	16.37	16.00		19.20	0.091	
52/40			16.57	16.83	19.71	0.095			
106/54			16.79	16.91	19.86	0.095			
802.11ax-HE40	NII-I	5190	242/61	15.11	15.31	18.22	0.066	< 250 mW (24 dBm)	
	NII-2A	5310	242/62	14.23	14.30	17.28	0.053		
	NII-2C	5510	242/61	13.42	13.50	16.47	0.044		
		5670	242/62	15.41	15.39	18.41	0.069		
	NII-III	5755	242/61	17.33	16.72	20.05	0.101	< 1 W (30 dBm)	
		5795	242/62	17.25	17.05	20.16	0.104		

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
				Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE80	NII-I	5210	484/65	15.21	15.47	N/A	18.35	0.068	< 250 mW (24 dBm)
	NII-2A	5290	484/66	12.33	11.76		15.06	0.032	
	NII-2C	5530	484/65	13.85	13.53		16.70	0.047	
		5610	484/66	15.78	15.62		18.71	0.074	
	NII-III	5775	484/65	15.39	16.22		18.84	0.077	< 1 W (30 dBm)
			484/66	15.71	15.45		18.59	0.072	
802.11ax-HE160	NII-I/ NII-2A	5250	996/67	10.75	10.59	N/A	13.68	0.023	< 250 mW (24 dBm)
			996/S67	10.47	10.34		13.42	0.022	
	NII-2C	5570	996/67	10.14	9.53		12.86	0.019	
			996/S67	9.90	9.71		12.82	0.019	

Note: The results have been included cable loss.


**SPOT CHECK**


Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		10log (1/X)	Total Average Output Power		Limit
				Chain 0	Chain 1		(dBm)	(W)	
802.11ax-HE80	NII-I	5210	484/65	15.31	15.76	N/A	18.55	0.072	< 250 mW (24 dBm)
	NII-2A	5290	484/66	11.89	12.38		15.15	0.033	
	NII-2C	5530	484/65	12.92	13.34		16.15	0.041	
		5610	484/66	14.24	14.46		17.36	0.054	
	NII-III	5775	484/65	15.14	15.72		18.45	0.070	< 1 W (30 dBm)
			484/66	15.41	15.62		18.53	0.071	
802.11ax-HE160	NII-I/ II-2A	5250	996/67	10.34	10.12	N/A	13.24	0.021	< 250 mW (24 dBm)
			996/S67	10.46	10.10		13.29	0.021	
	NII-2C	5570	996/67	10.65	9.80		13.26	0.021	
			996/S67	9.98	9.90		12.95	0.020	


Note: 1. The results have been included cable loss.


2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results.

A.4.2 Measurement Plots

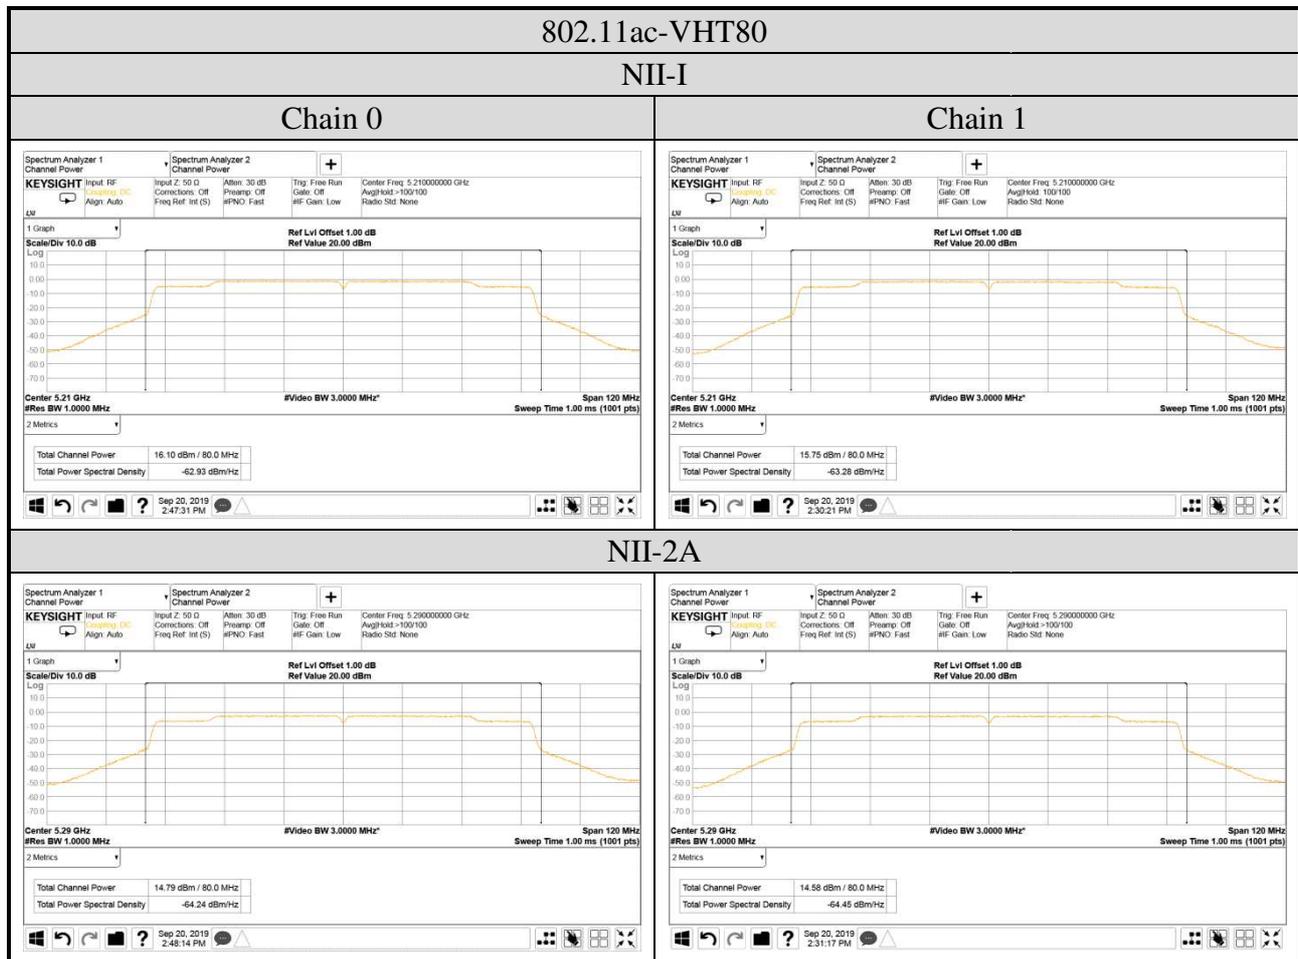

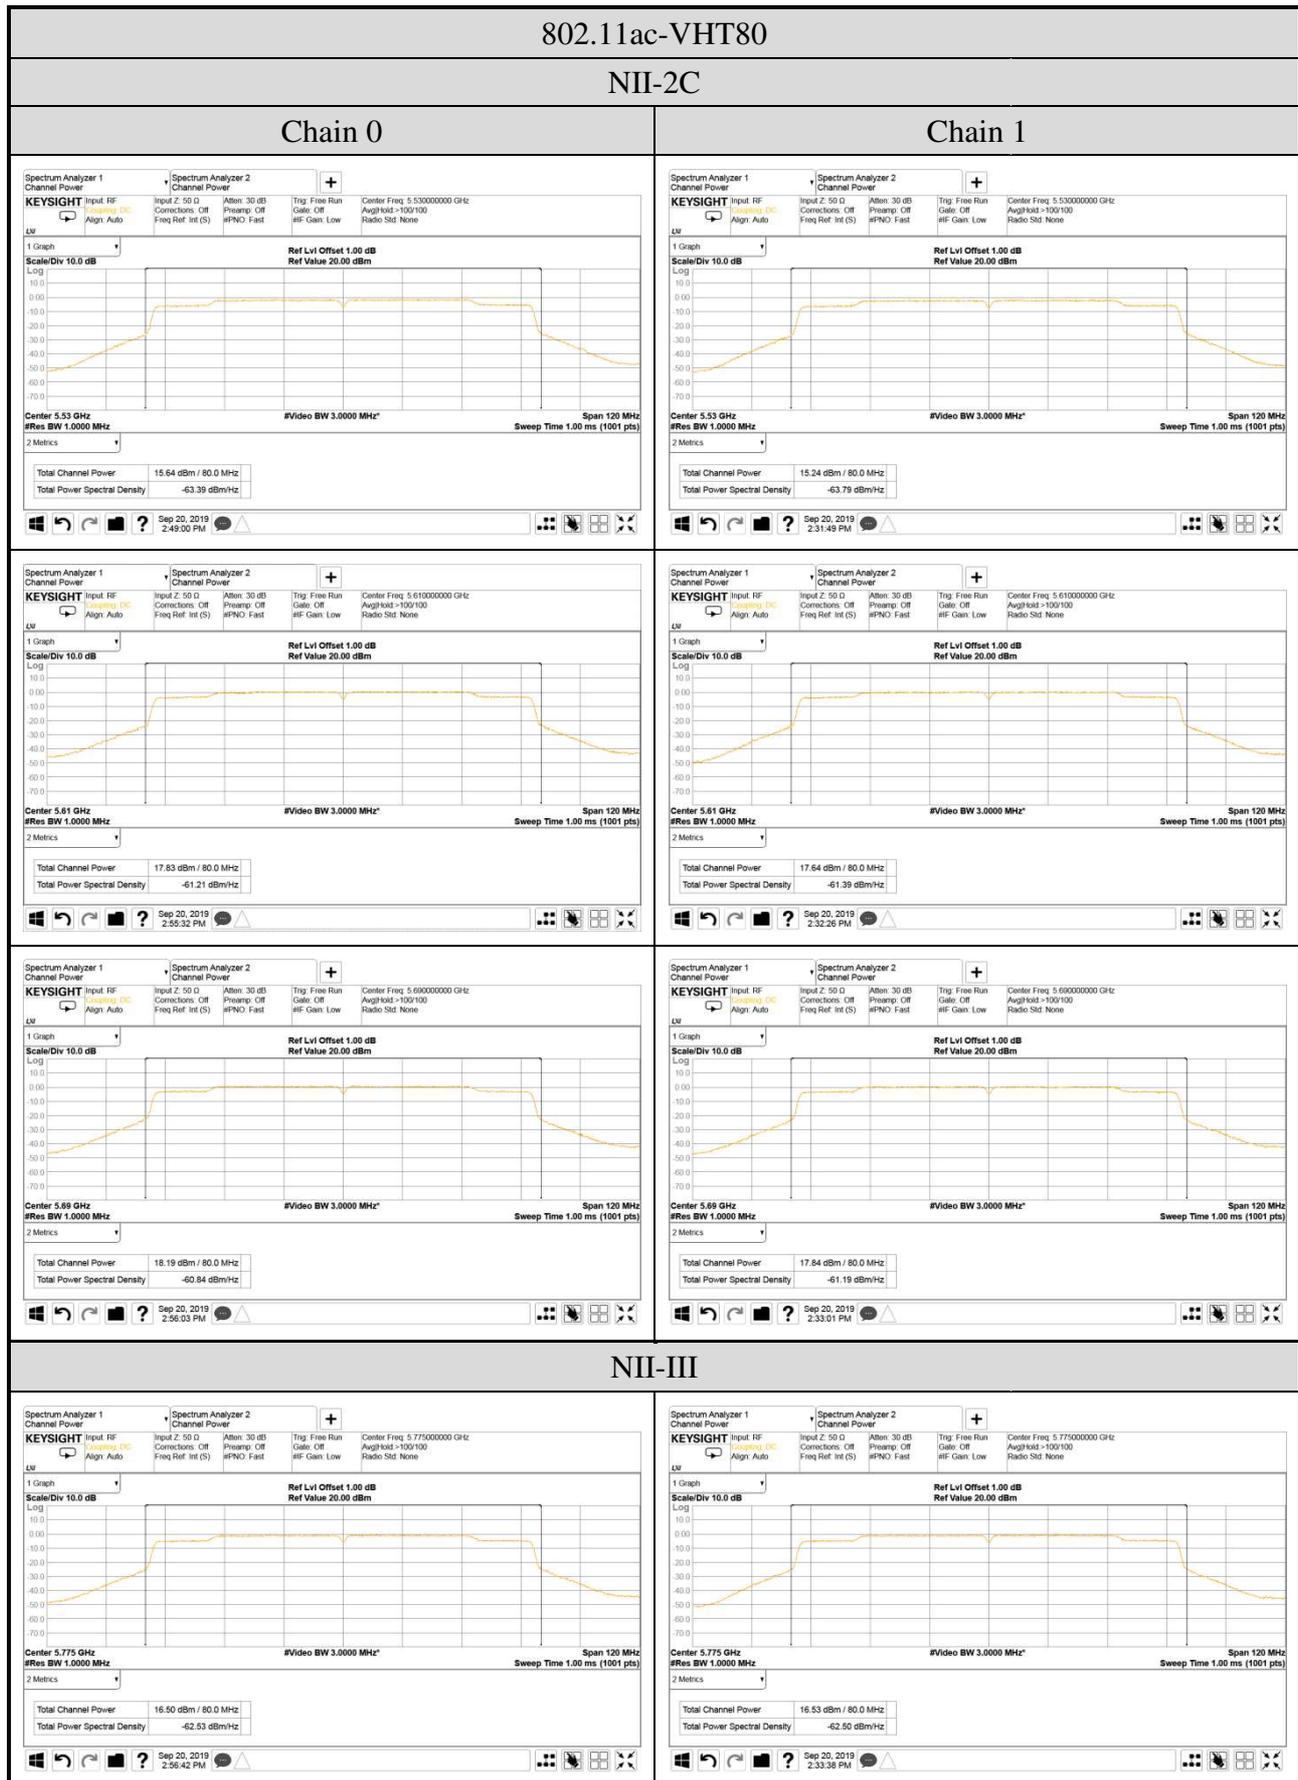

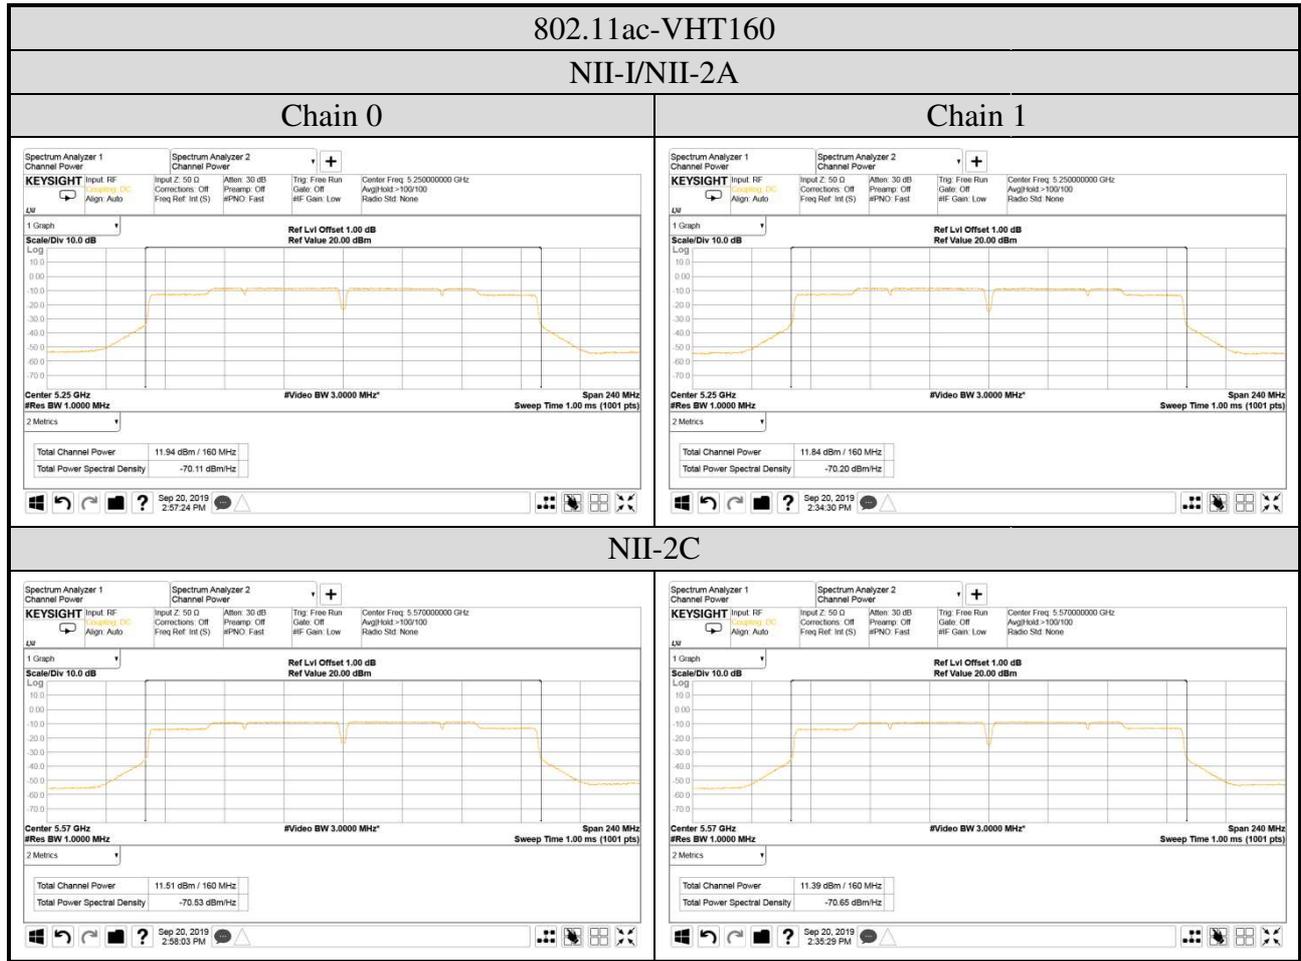






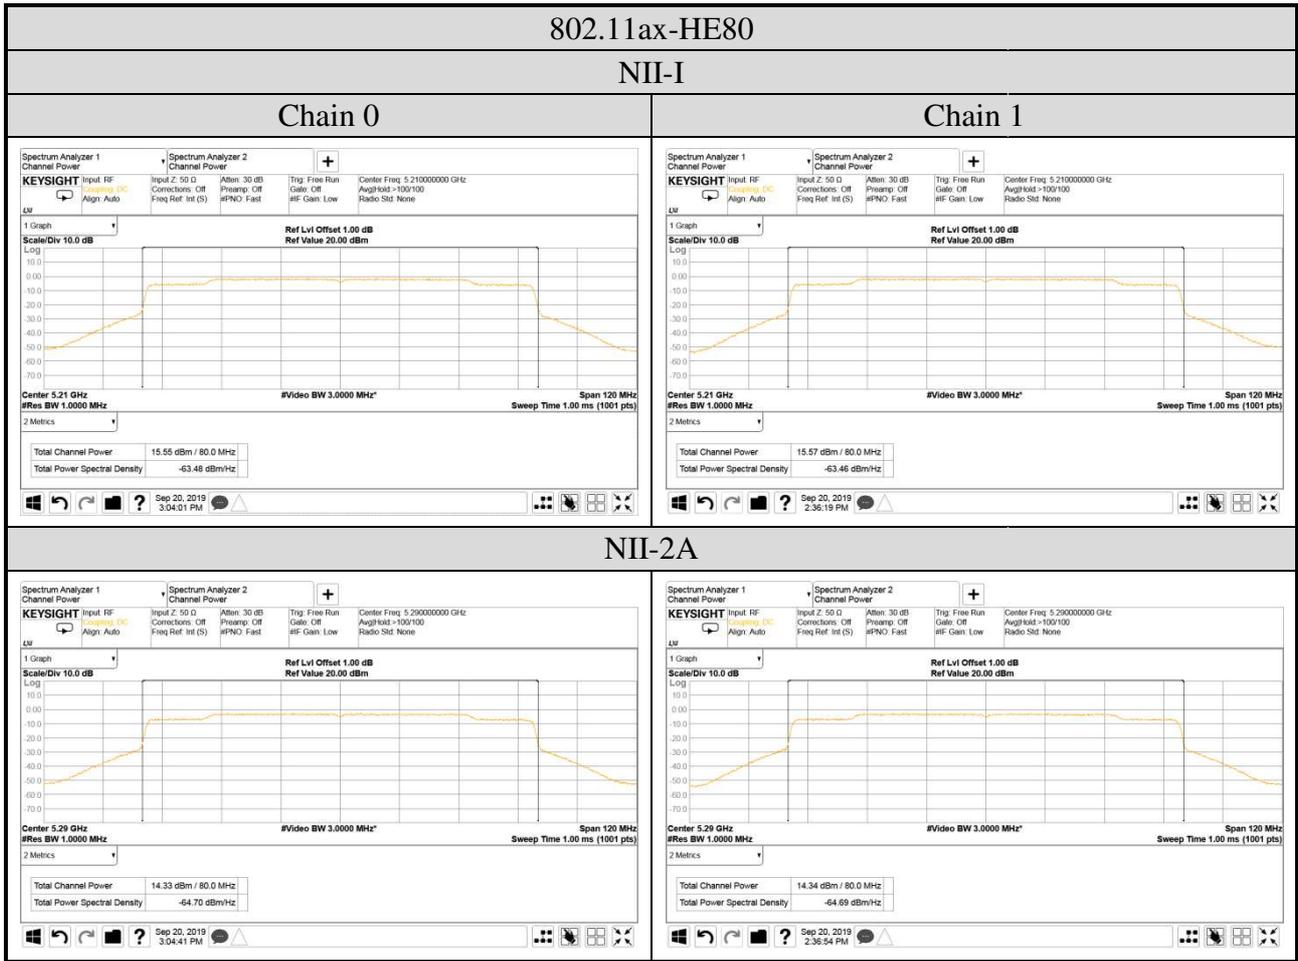


802.11ax-HE80



NII-2C

Chain 0

Chain 1

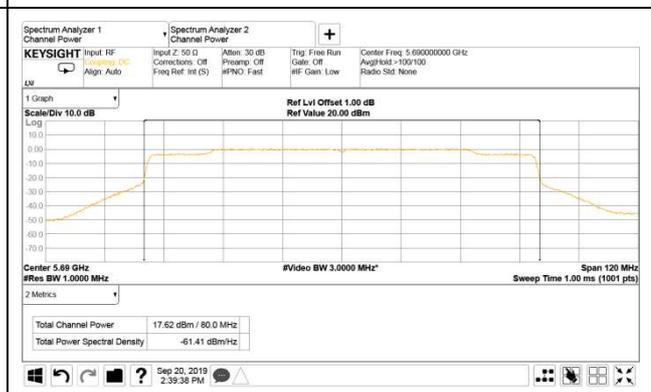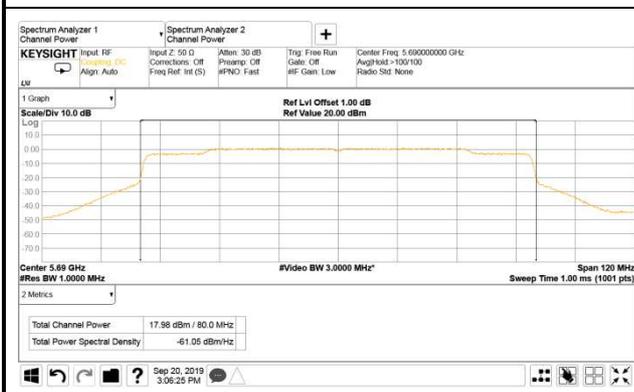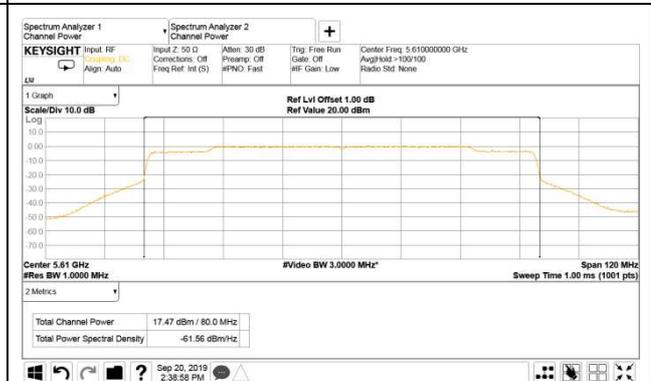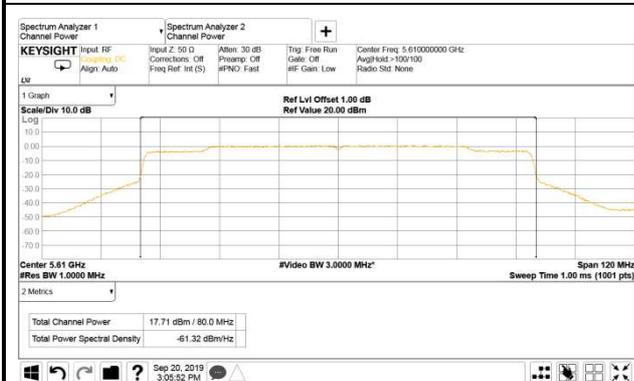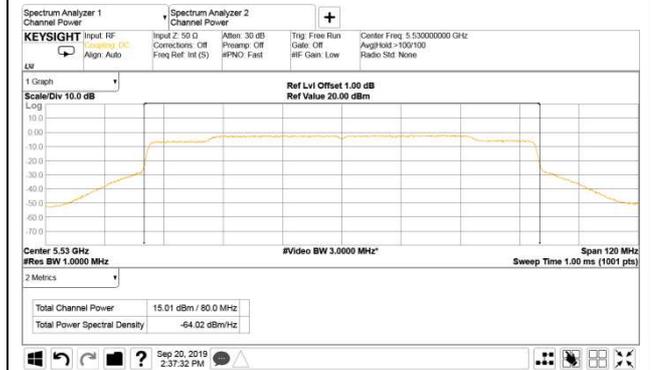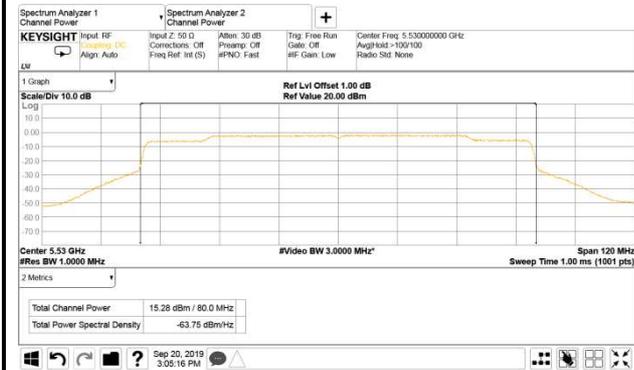



NII-III

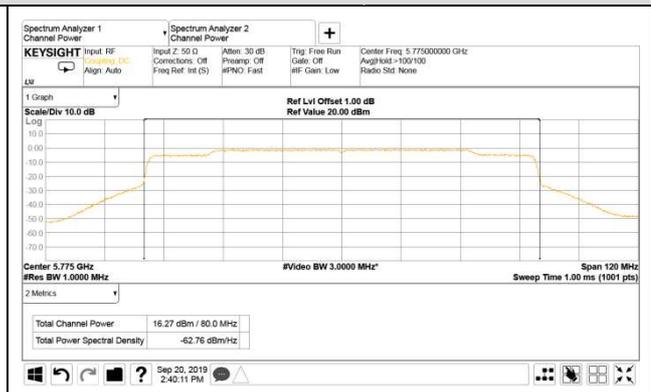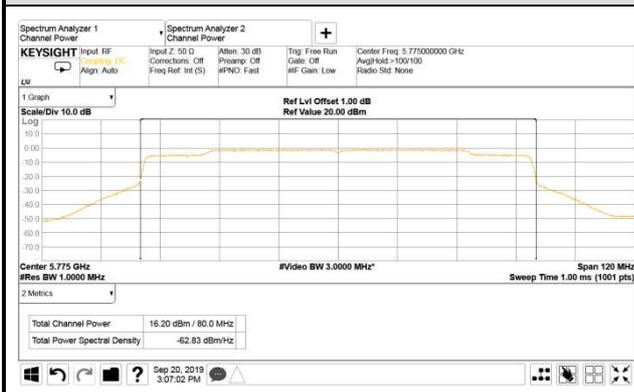


**Audix Technology Corp.**  
 No. 53-11, Dingfu, Linkou, Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

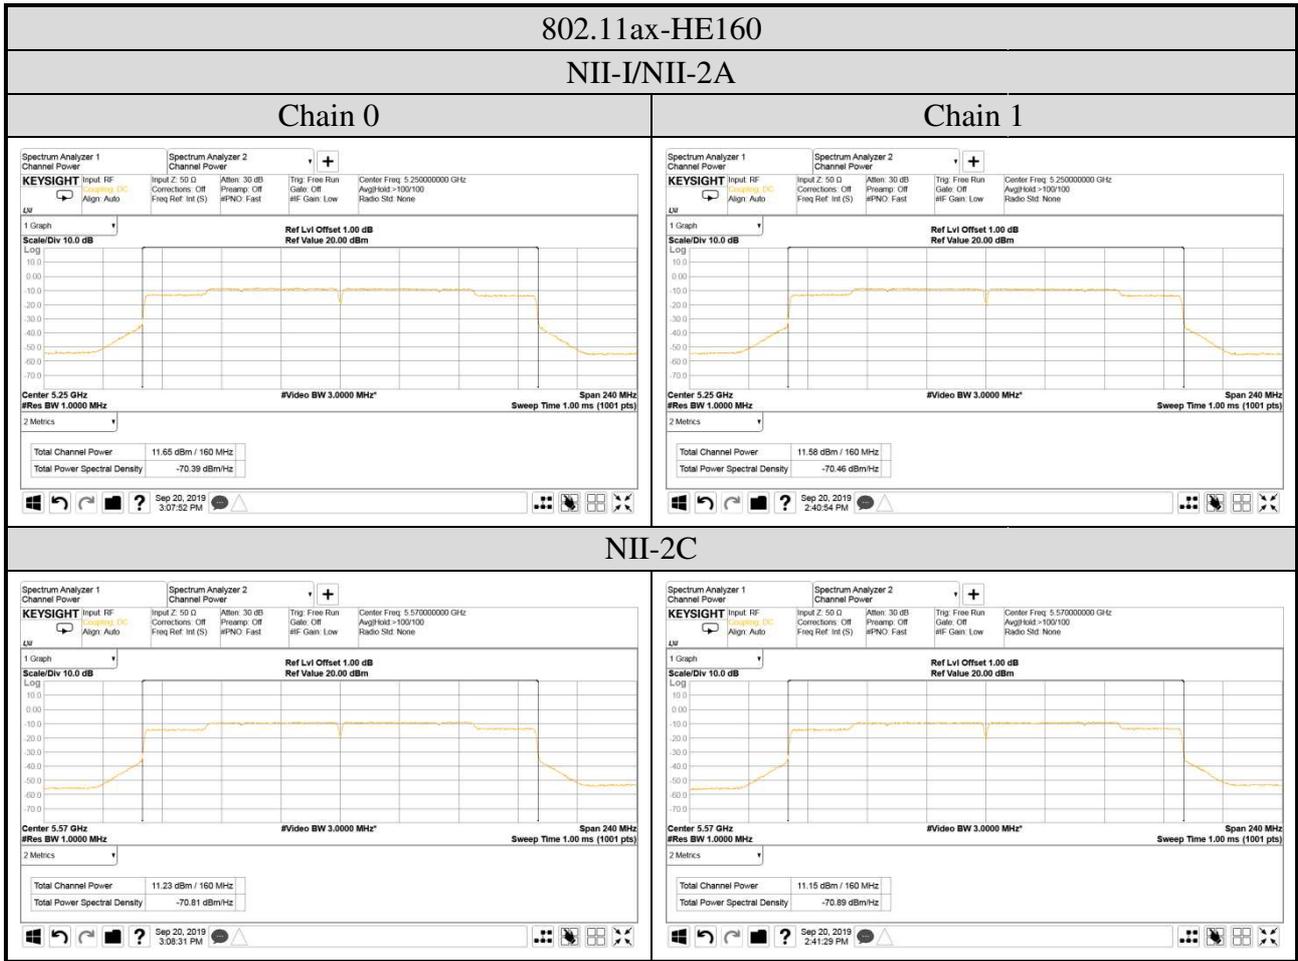

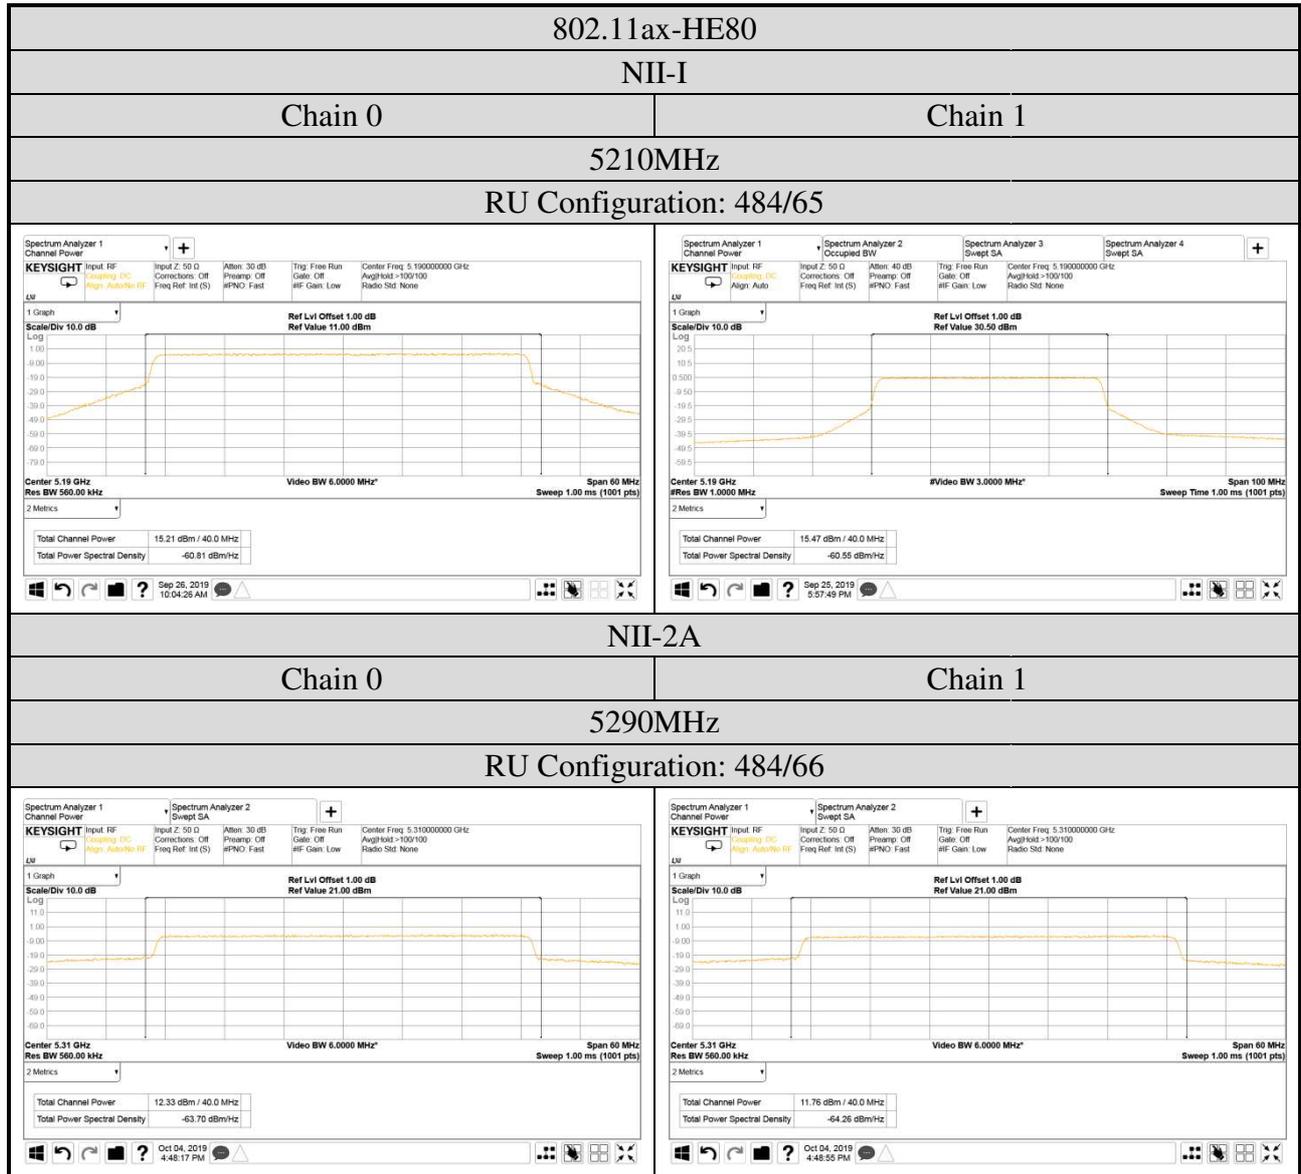


802.11ax-HE80  
 NII-2C  
 Chain 0 Chain 1  
 5530MHz  
 RU Configuration: 484/65

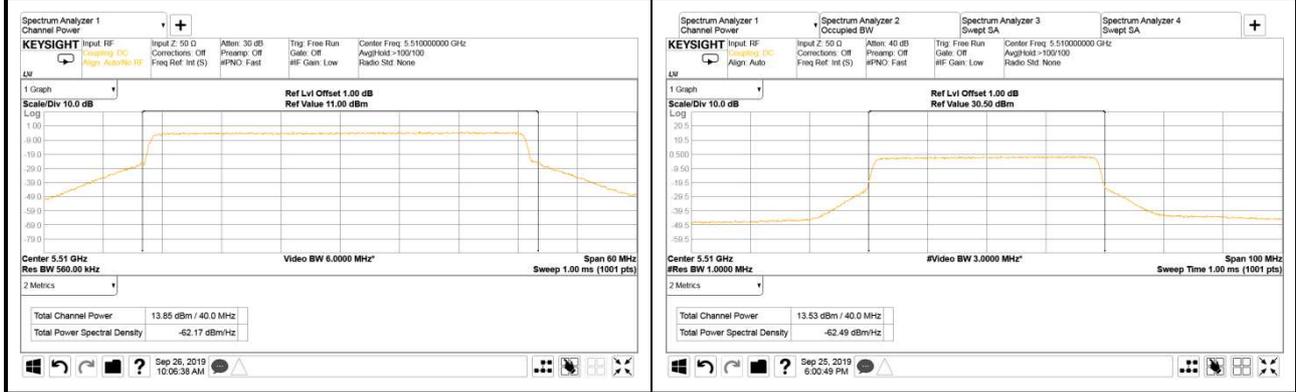



Chain 0 Chain 1

5610MHz  
 RU Configuration: 484/66




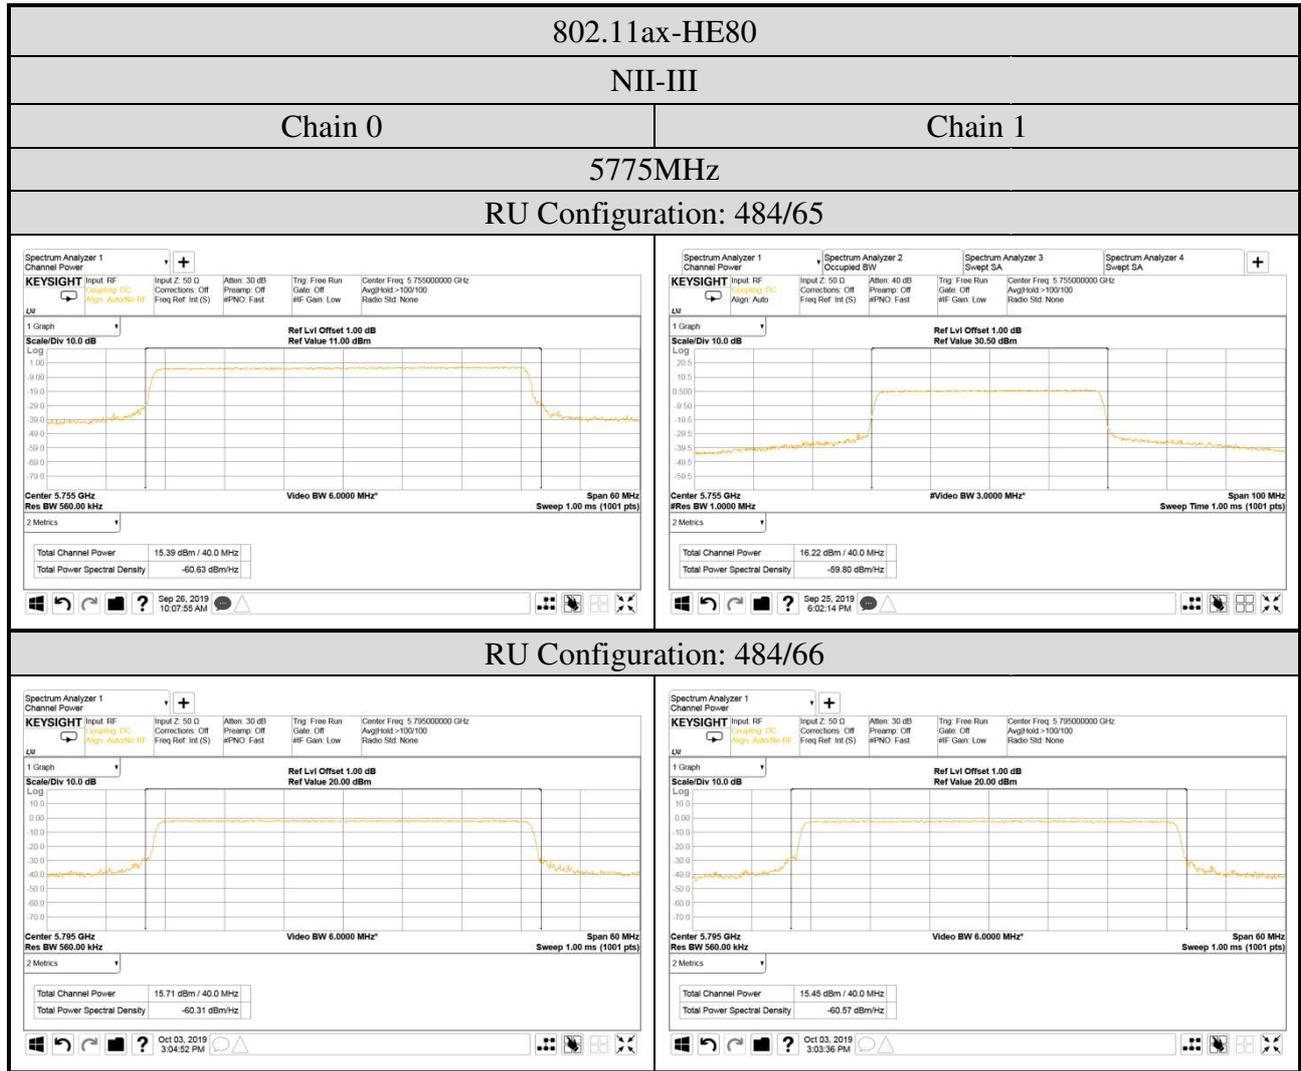




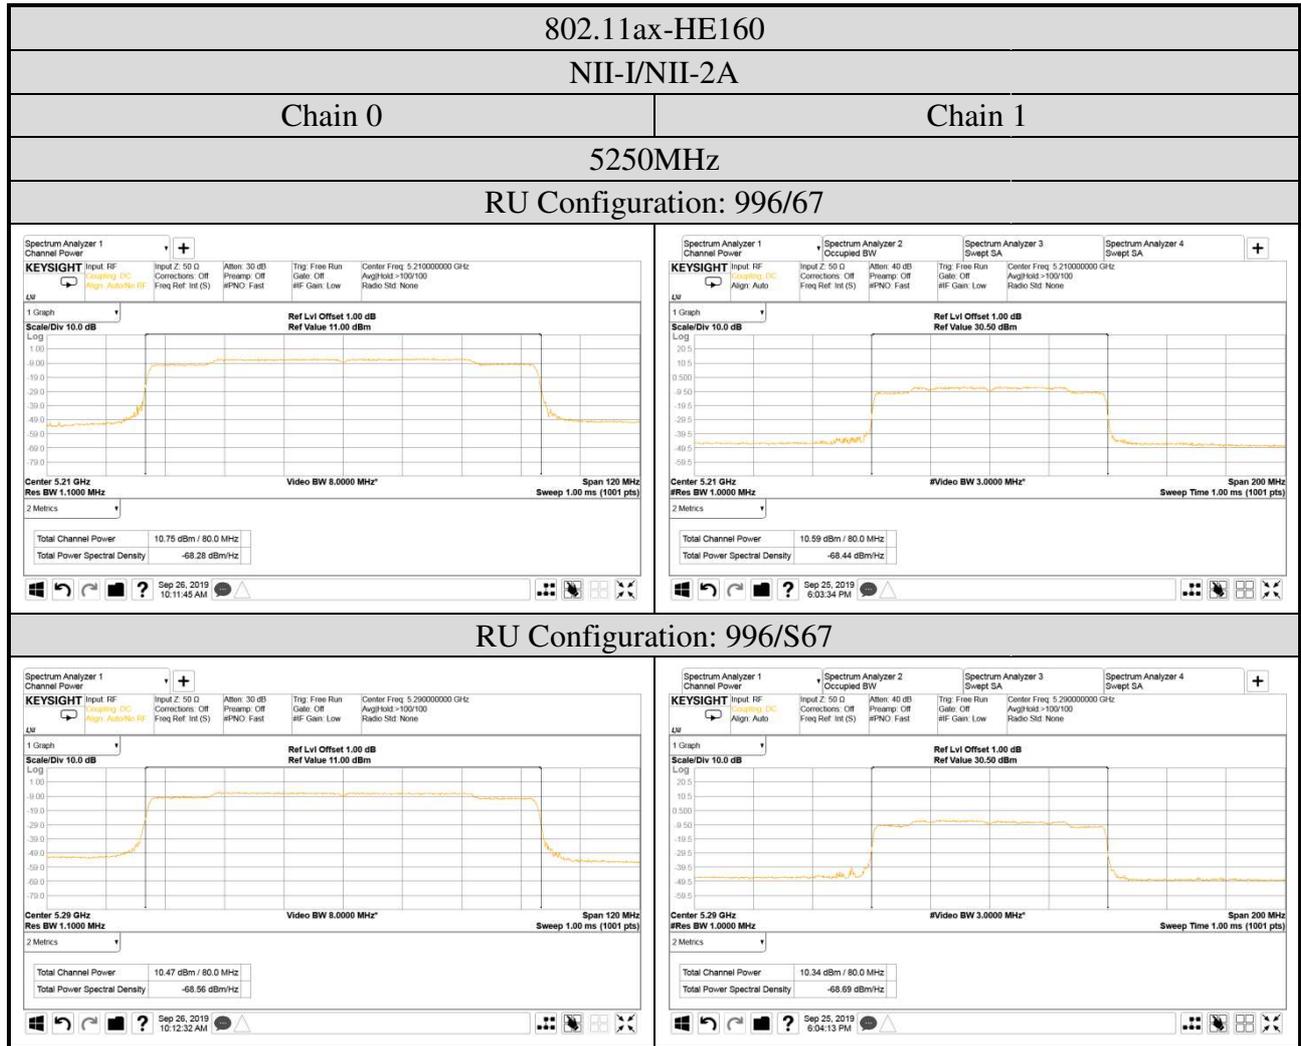



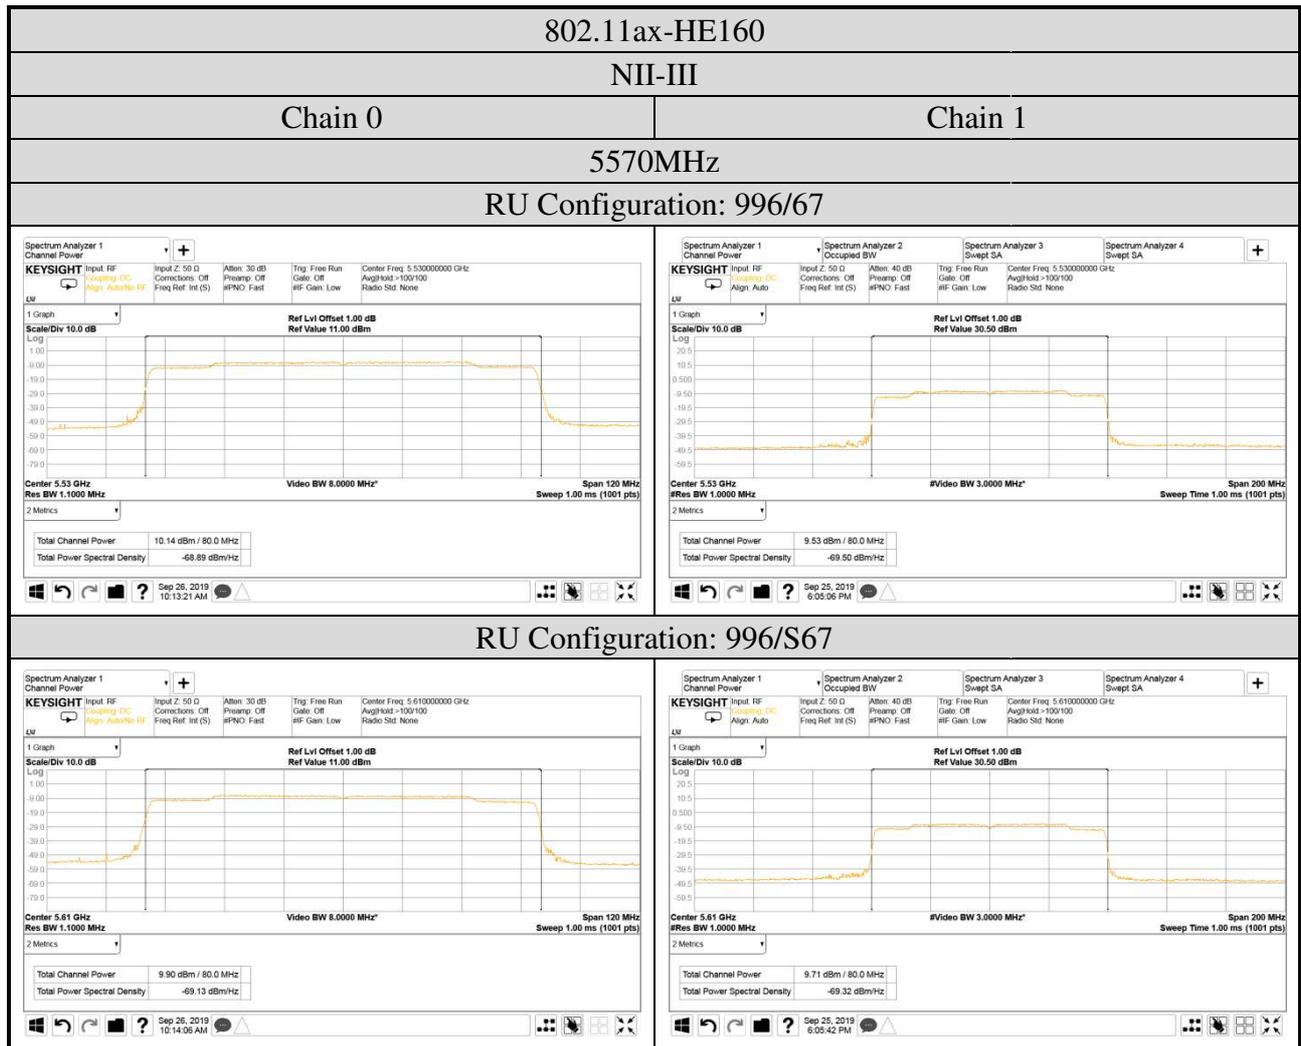



## A.5 CONDUCTED BAND EDGES



Test Date	2020/01/07	Temp./Hum.	23°C/60%
Cable Loss	1.80dB	Tested By	Kuper Hsu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)	802.11a: 0 802.11n-HT20/40: 3 802.11ac-VHT80/160: 3 802.11ax-HE80/160: 3		

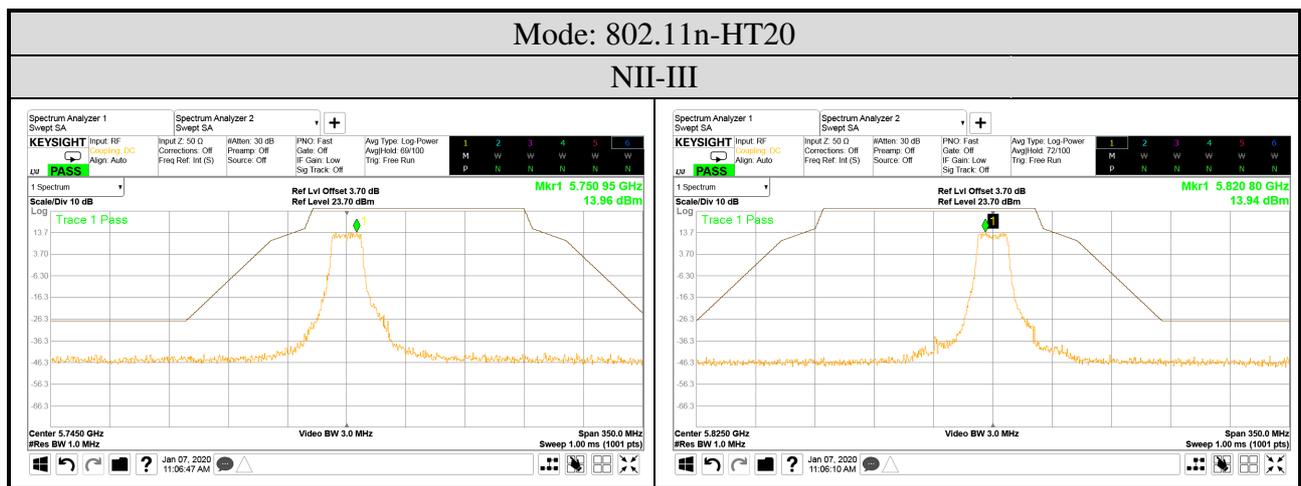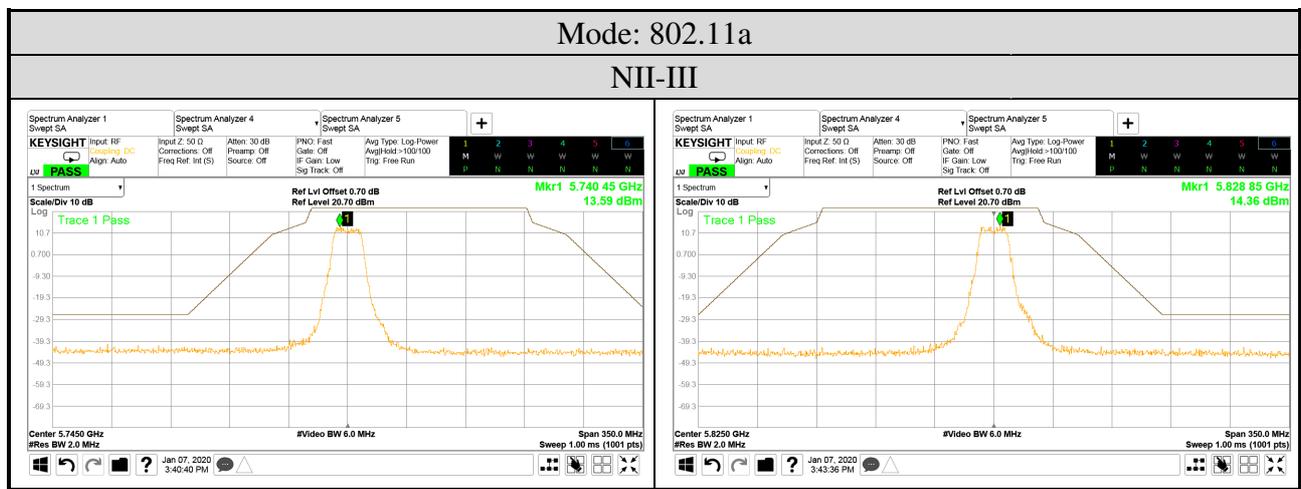

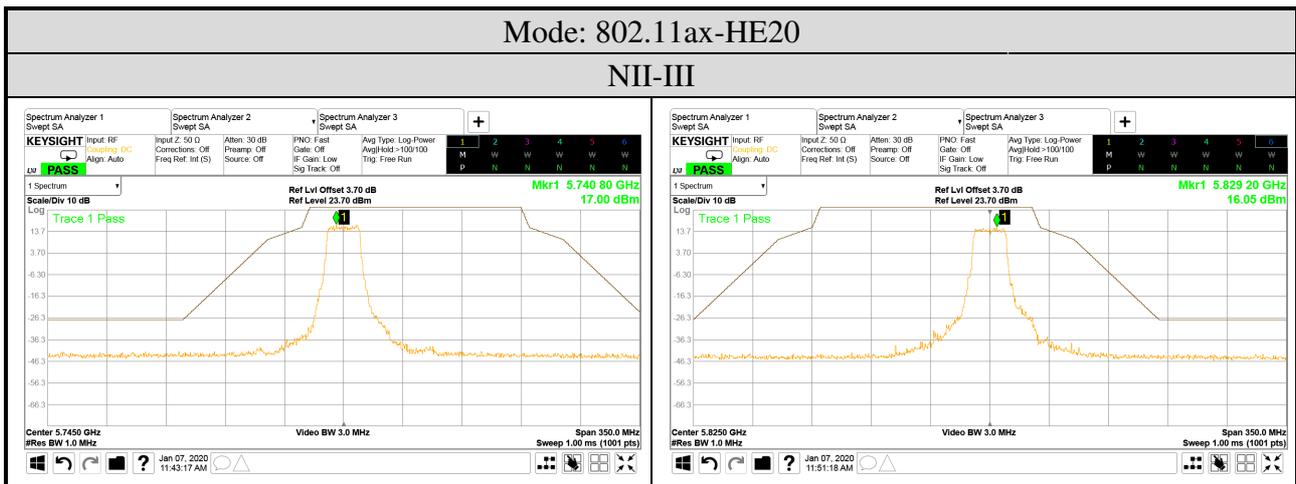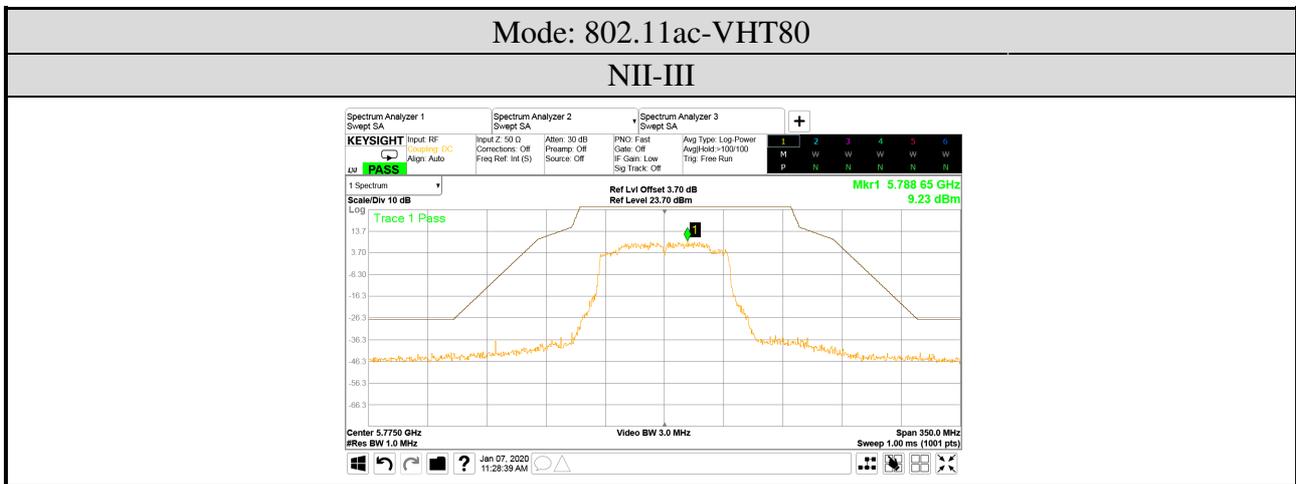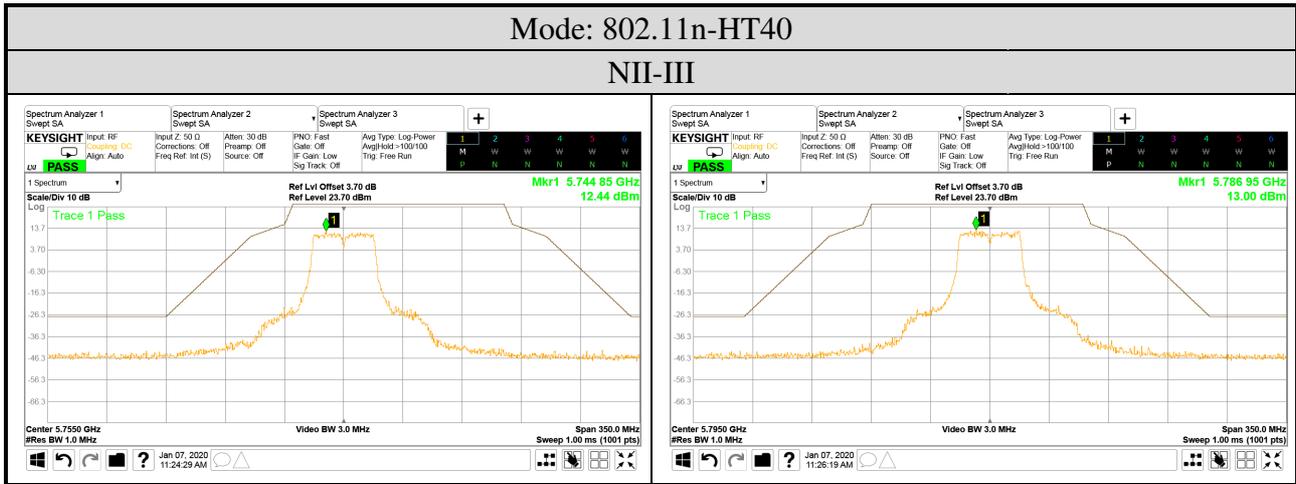

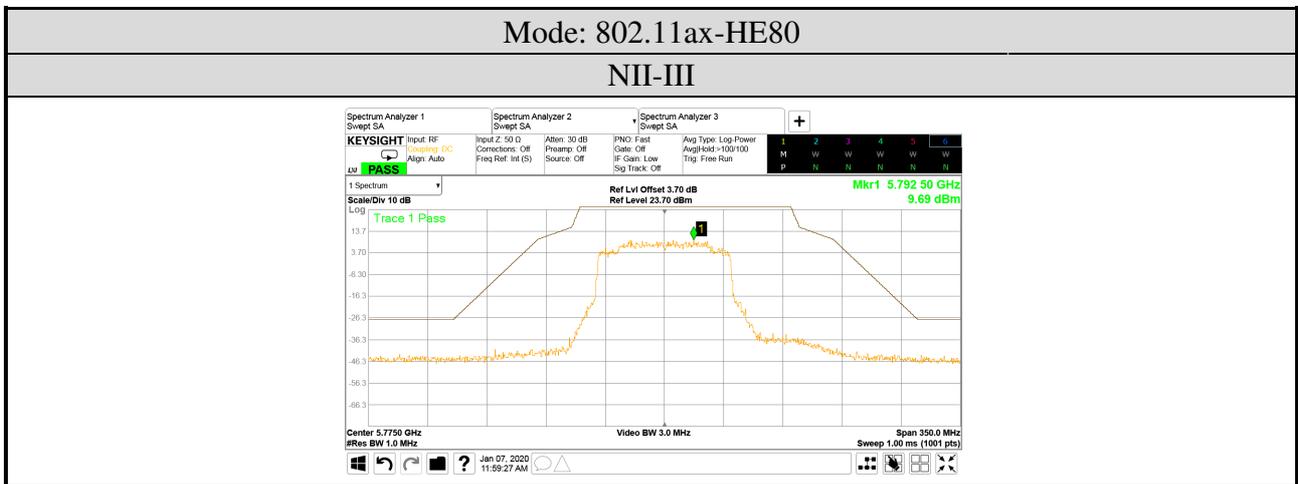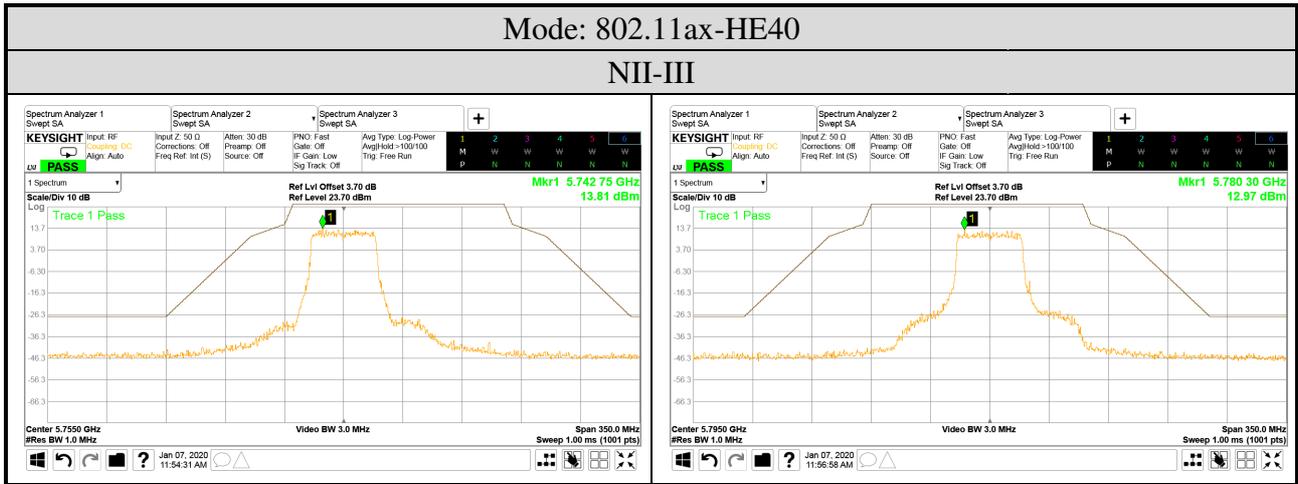

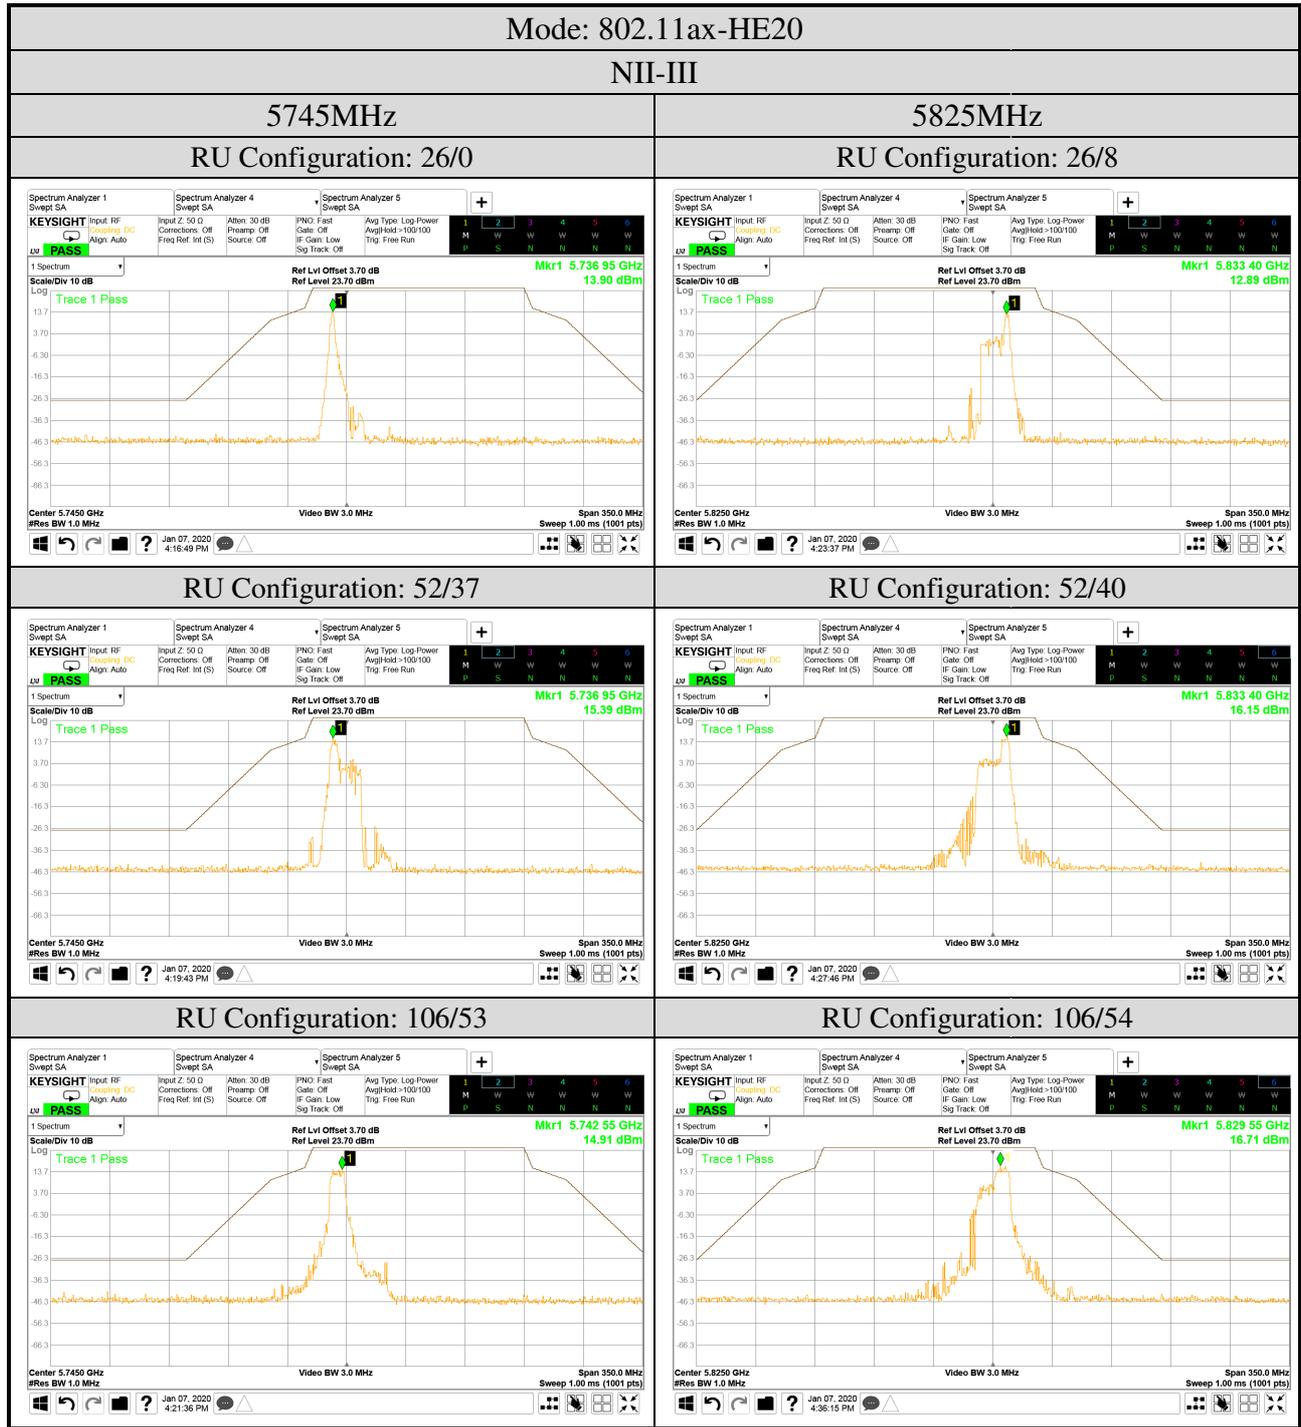

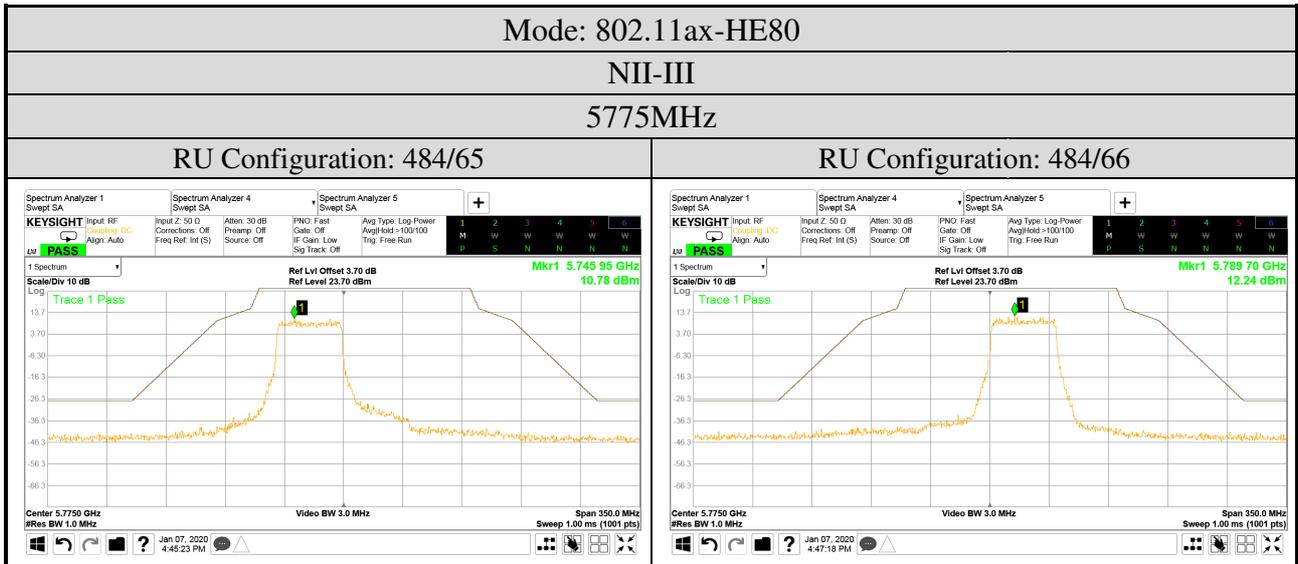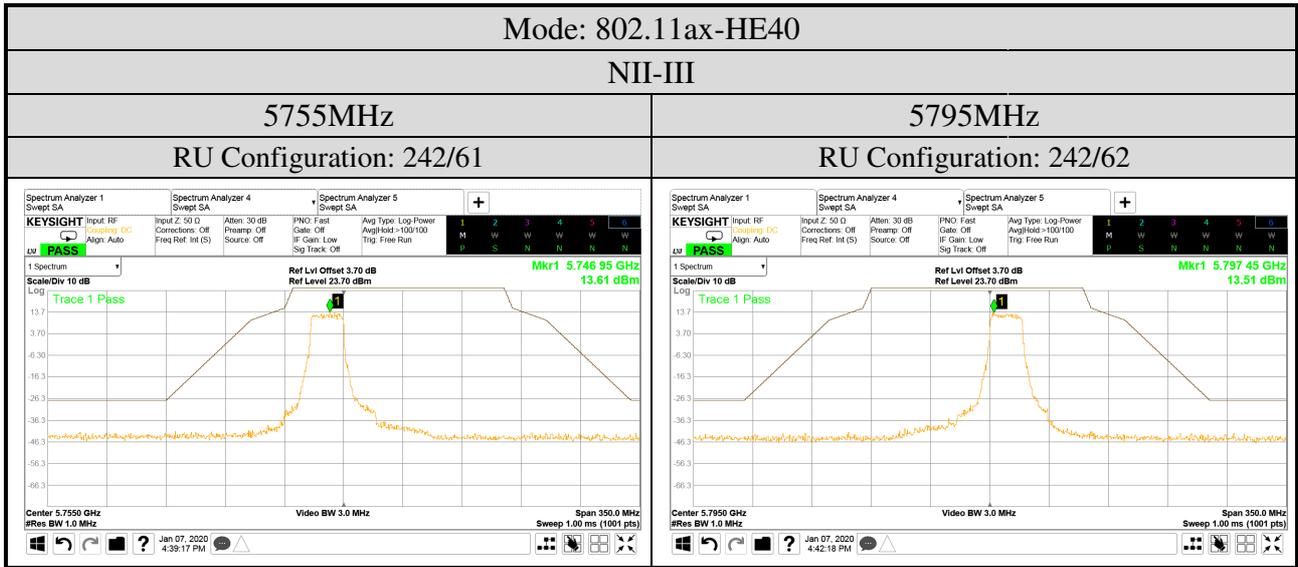

## A.6 POWER SPECTRAL DENSITY

Test Date	2019/09/23~10/3	Temp./Hum.	24°C /47~53%
Cable Loss	1.00dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		802.11a: 0 802.11n-HT20/40: 3 802.11ac-VHT80/160: 3 802.11ax-HE80/160: 3	

### A.6.1 Power Spectral Density Result

Mode	UNII Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11a	NII-I	5180	7.304	11 dBm/MHz
		5200	8.070	
		5240	8.864	
	NII-2A	5260	8.770	
		5300	7.407	
		5320	6.531	
	NII-2C	5500	6.744	
		5580	8.860	
		5700	6.507	
		5720	8.838	
	NII-III <sup>Note2</sup>	5745	6.604	30dBm/500 kHz
		5785	6.672	
5825		6.616		

Note 1: All results have been included cable loss and Simultaneous Factor and correct duty factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

Mode	UNII Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11n- HT20	NII-I	5180	7.207	11 dBm/MHz
		5200	7.751	
		5240	8.948	
	NII-2A	5260	9.014	
		5300	7.552	
		5320	6.079	
	NII-2C	5500	6.477	
		5580	8.936	
		5700	6.287	
		5720	8.803	
NII-III <sup>Note2</sup>	5745	6.562	30dBm/500 kHz	
	5785	7.103		
	5825	6.825		
802.11n- HT40	NII-I	5190	4.124	11 dBm/MHz
		5230	5.601	
	NII-2A	5270	4.613	
		5310	2.175	
	NII-2C	5510	2.677	
		5550	3.714	
		5670	5.746	
	NII-III <sup>Note2</sup>	5710	6.437	
		5755	3.771	30dBm/500 kHz
	5795	3.783		
802.11ac- VHT80	NII-I	5210	1.109	11 dBm/MHz
	NII-2A	5290	-0.078	
		5530	1.630	
	NII-2C	5610	3.978	
		5690	1.682	
	NII-III <sup>Note2</sup>	5775	-0.372	30dBm/500 kHz
802.11ac- VHT160	NII-I/NII-2A	5250	-5.753	11 dBm/MHz
	NII-2C	5570	-5.638	

Note 1: All results have been included cable loss and Simultaneous Factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

Mode	UNII Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11ax-HE20	NII-I	5180	6.955	11 dBm/MHz
		5200	7.579	
		5240	8.661	
	NII-2A	5260	9.004	
		5300	6.932	
		5320	6.014	
	NII-2C	5500	6.177	
		5580	8.680	
		5700	6.106	
		5720	8.779	
	NII-III <sup>Note2</sup>	5745	5.230	30dBm/500 kHz
5785		5.201		
5825		5.344		
802.11ax-HE40	NII-I	5190	3.664	11 dBm/MHz
		5230	5.246	
	NII-2A	5270	4.226	
		5310	1.608	
	NII-2C	5510	2.252	
		5550	3.309	
		5670	5.314	
	NII-III <sup>Note2</sup>	5710	5.871	
		5755	2.431	30dBm/500 kHz
		5795	2.550	
802.11ax-HE80	NII-I	5210	0.831	11 dBm/MHz
	NII-2A	5290	-0.441	
		5530	1.185	
	NII-2C	5610	3.570	
		5690	3.682	
	NII-III <sup>Note2</sup>	5775	-1.398	30dBm/500 kHz
802.11ax-HE160	NII-I/NII-2A	5250	-6.145	11 dBm/MHz
	NII-2C	5570	-6.191	

Note 1: All results have been included cable loss and Simultaneous Factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

Mode	UNII Band	Centre Frequency (MHz)	RU Configuration	Power Spectral Density (dBm)	Limit
802.11ax-HE20	NII-I	5180	26/10	10.204	11 dBm/MHz
			52/37	10.844	
			106/53	9.840	
	NII-2A	5320	26/8	10.090	
			52/40	7.383	
			106/54	8.675	
	NII-2C	5500	26/10	10.522	
			52/37	10.852	
			106/53	9.587	
		5700	26/8	9.841	
			52/40	8.772	
			106/54	8.214	
NII-III <sup>Note2</sup>	5745	26/10	7.675	30dBm/500 kHz	
		52/37	7.773		
		106/53	7.986		
	5825	26/8	13.528		
		52/40	10.901		
		106/54	8.154		
802.11ax-HE40	NII-I	5190	242/61	6.586	11 dBm/MHz
	NII-2A	5310	242/62	4.462	
	NII-2C	5510	242/61	5.450	
		5670	242/62	6.834	
	NII-III <sup>Note2</sup>	5755	242/61	4.064	30dBm/500 kHz
		5795	242/62	4.563	
802.11ax-HE80	NII-I	5210	484/65	3.093	11 dBm/MHz
	NII-2A	5290	484/66	1.752	
	NII-2C	5530	484/65	2.010	
		5610	484/66	4.301	
	NII-III <sup>Note2</sup>	5775	484/65	0.411	30dBm/500 kHz
			484/66	0.620	
802.11ax-HE160	NII-I/ NII-2A	5250	996/67	-3.198	11 dBm/MHz
			996/S67	-3.453	
	NII-2C	5570	996/67	-4.063	
			996/S67	-3.809	

Note 1: All results have been included cable loss and Simultaneous Factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

A.6.2 Measurement Plots

