

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	88
A.2.3 Emissions in Non-restricted Frequency Bands:.....	91
A.3 DTS/OCCUPIED BANDWIDTH	92
A.3.1 DTS/Occupied Bandwidth Result.....	92
A.3.2 Measurement Plots	94
A.4 MAXIMUM PEAK OUTPUT POWER	110
A.4.1 Peak Output Power	110
A.4.2 Average Output Power (Reporting only).....	114
A.4.3 Measurement Plots	117
A.5 EMISSION LIMITATIONS	119
A.6 POWER SPECTRAL DENSITY	145
A.6.1 Power Spectral Density Result	145
A.6.2 Measurement Plots	148

A.1 CONDUCTED EMISSION

Test Date	2023/03/13	Temp./Hum.	23°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Ken Yang

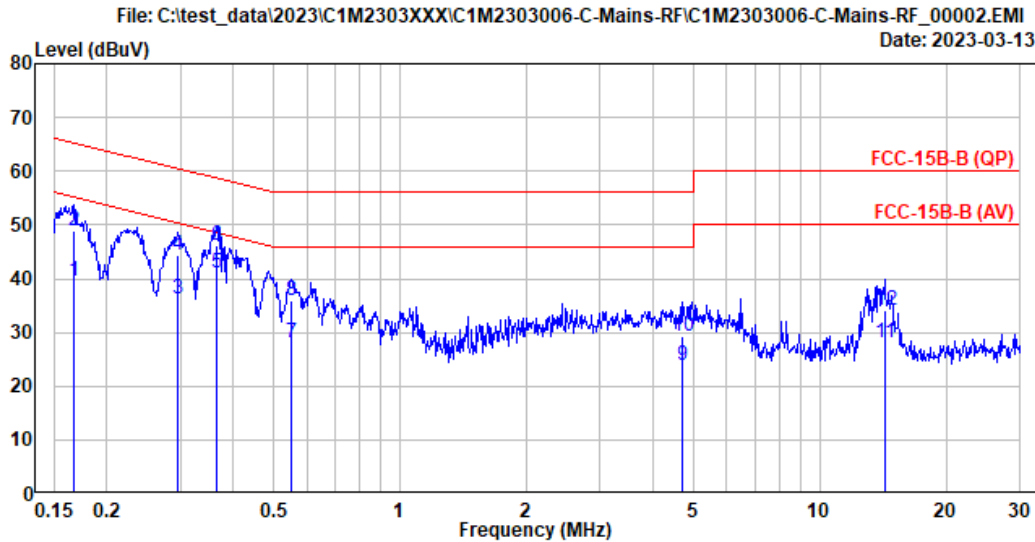


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 23°C/51%	Test Rating	: 120Vac/60Hz
EUT Model	: 16U75R	Engineer	: Ken Yang
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.167	10.33	0.03	9.85	19.23	39.44	55.13	15.69	Average
2	0.167	10.33	0.03	9.85	28.64	48.85	65.13	16.28	QP
3	0.295	10.32	0.03	9.85	16.02	36.22	50.37	14.15	Average
4	0.295	10.32	0.03	9.85	24.25	44.45	60.37	15.92	QP
5	0.364	10.32	0.03	9.85	20.85	41.05	48.63	7.58	Average
6	0.364	10.32	0.03	9.85	25.97	46.17	58.63	12.46	QP
7	0.551	10.33	0.03	9.85	7.89	28.10	46.00	17.90	Average
8	0.551	10.33	0.03	9.85	15.68	35.89	56.00	20.11	QP
9	4.721	10.44	0.09	9.87	3.44	23.84	46.00	22.16	Average
10	4.721	10.44	0.09	9.87	8.94	29.34	56.00	26.66	QP
11	14.275	10.85	0.17	9.91	7.12	28.05	50.00	21.95	Average
12	14.275	10.85	0.17	9.91	13.05	33.98	60.00	26.02	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/03/13	Temp./Hum.	23°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Ken Yang

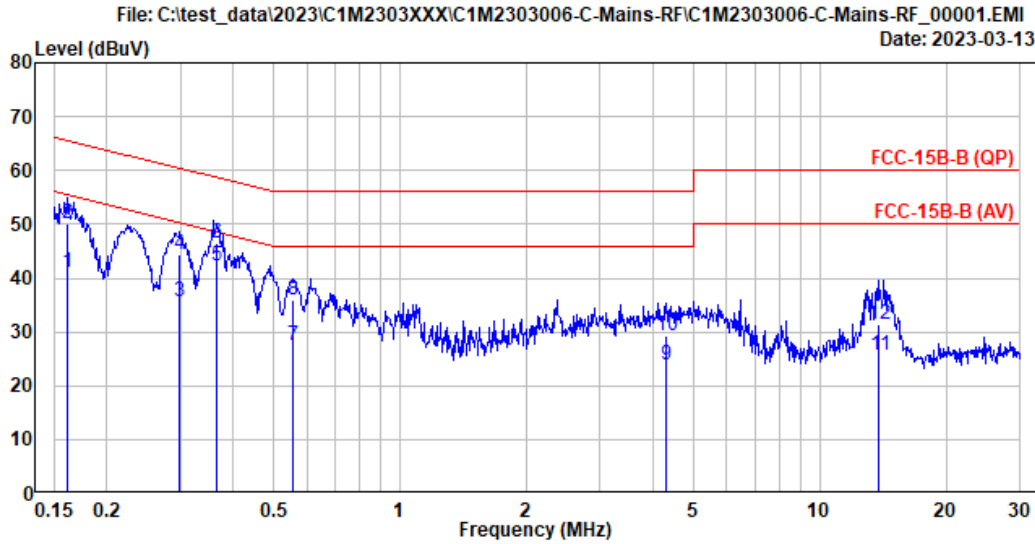

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 23°C/51%	Test Rating	: 120Vac/60Hz
EUT Model	: 16U75R	Engineer	: Ken Yang
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.22	0.03	9.85	21.00	41.10	55.38	14.28	Average
2	0.162	10.22	0.03	9.85	29.87	49.97	65.38	15.41	QP
3	0.298	10.22	0.03	9.85	15.66	35.76	50.29	14.53	Average
4	0.298	10.22	0.03	9.85	24.42	44.52	60.29	15.77	QP
5	0.366	10.22	0.03	9.85	22.20	42.30	48.59	6.29	Average
6	0.366	10.22	0.03	9.85	26.31	46.41	58.59	12.18	QP
7	0.556	10.22	0.03	9.85	7.47	27.57	46.00	18.43	Average
8	0.556	10.22	0.03	9.85	15.90	36.00	56.00	20.00	QP
9	4.294	10.29	0.08	9.86	3.48	23.71	46.00	22.29	Average
10	4.294	10.29	0.08	9.86	9.14	29.37	56.00	26.63	QP
11	13.855	10.52	0.16	9.91	5.18	25.77	50.00	24.23	Average
12	13.855	10.52	0.16	9.91	10.87	31.46	60.00	28.54	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2023/03/07 ~ 13	Temp./Hum.	18 ~ 22°C/52 ~ 62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.08	1.43	26.49	30.74	28.76	40.00	11.24	Peak
101.780	16.96	2.63	26.28	35.66	28.98	43.50	14.52	Peak
250.190	18.49	4.26	25.69	33.71	30.78	46.00	15.22	Peak
397.630	21.58	5.90	26.42	32.77	33.83	46.00	12.17	Peak
485.900	23.25	6.65	27.04	34.96	37.82	46.00	8.18	Peak
540.220	23.86	6.90	27.24	34.80	38.32	46.00	7.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	39.72	37.91	40.00	2.09	Peak
119.240	17.98	2.84	26.16	31.13	25.79	43.50	17.71	Peak
250.190	18.49	4.26	25.69	33.91	30.98	46.00	15.02	Peak
485.900	23.25	6.65	27.04	34.52	37.39	46.00	8.61	Peak
540.220	23.86	6.90	27.24	35.03	38.55	46.00	7.45	Peak
655.650	24.58	7.40	27.42	32.26	36.83	46.00	9.17	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.88	1.46	26.49	31.00	28.86	40.00	11.14	Peak
101.780	16.96	2.63	26.28	35.04	28.36	43.50	15.14	Peak
250.190	18.49	4.26	25.69	34.05	31.11	46.00	14.89	Peak
378.230	21.17	5.69	26.28	31.81	32.39	46.00	13.61	Peak
505.300	23.52	6.78	27.15	32.77	35.93	46.00	10.07	Peak
540.220	23.86	6.90	27.24	34.93	38.46	46.00	7.54	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	39.69	37.88	40.00	2.12	Peak
115.360	17.78	2.80	26.19	31.17	25.56	43.50	17.94	Peak
145.430	17.18	3.15	26.02	31.64	25.95	43.50	17.55	Peak
344.280	20.42	5.28	26.01	31.19	30.89	46.00	15.11	Peak
485.900	23.25	6.65	27.04	33.74	36.61	46.00	9.39	Peak
540.220	23.86	6.90	27.24	35.08	38.60	46.00	7.40	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

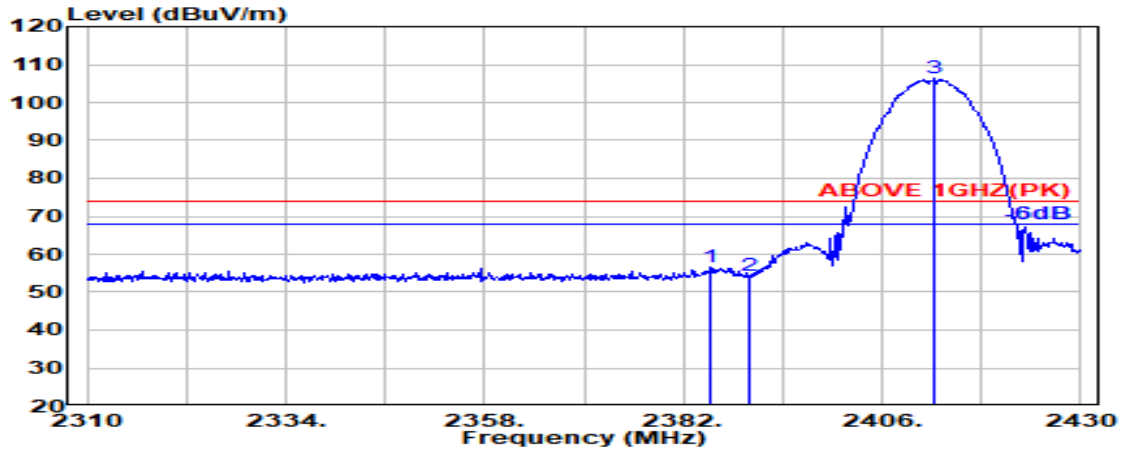

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.400	32.00	5.72	34.51	53.21	56.42	74.00	17.58	Peak
2390.000	32.00	5.72	34.51	51.00	54.22	74.00	19.78	Peak
@ 2412.300	32.00	5.76	34.51	103.08	106.32	---	---	Peak

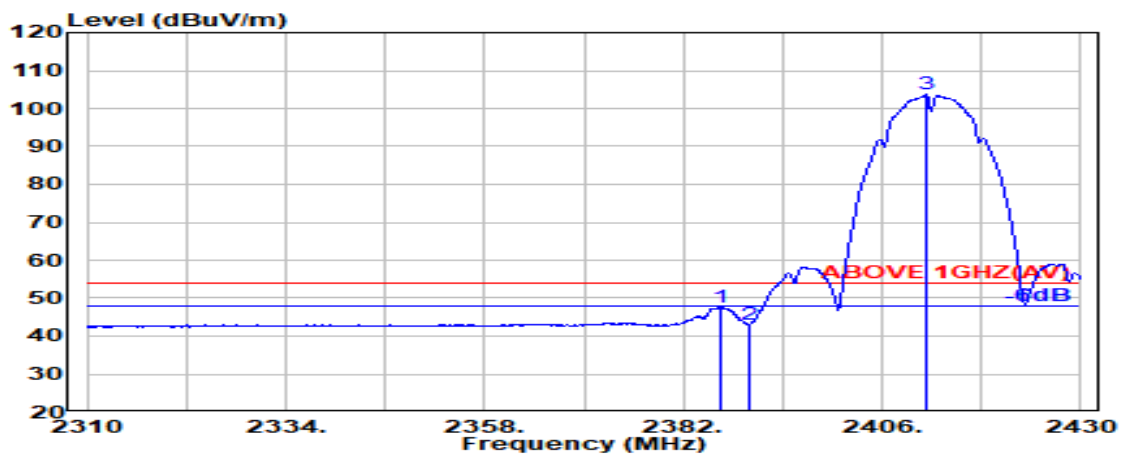


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.600	32.00	5.72	34.51	44.40	47.61	54.00	6.39	Average
2390.000	32.00	5.72	34.51	39.78	43.00	54.00	11.00	Average
@ 2411.200	32.00	5.76	34.51	100.38	103.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

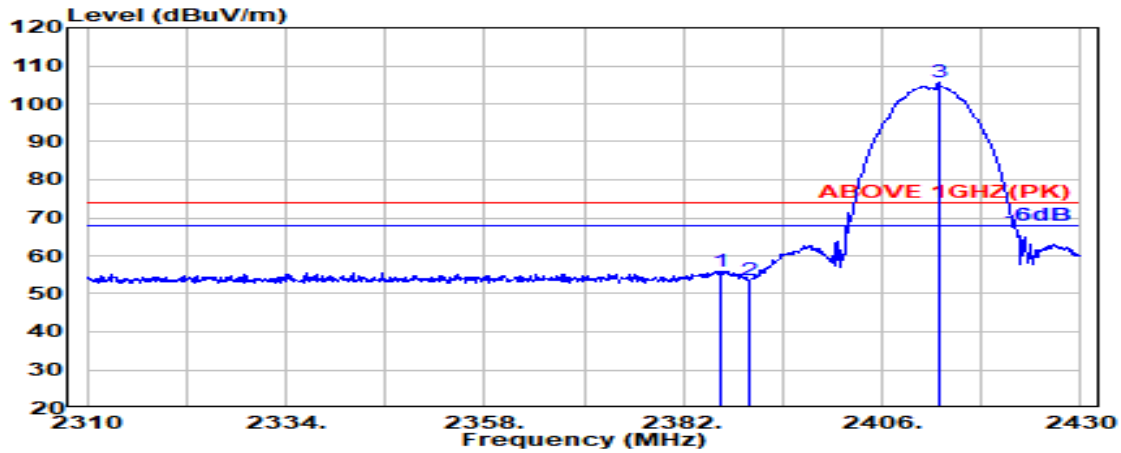

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.400	32.00	5.72	34.51	52.79	56.00	74.00	18.00	Peak
2390.000	32.00	5.72	34.51	50.45	53.67	74.00	20.33	Peak
@ 2412.800	32.00	5.76	34.51	102.52	105.77	---	---	Peak

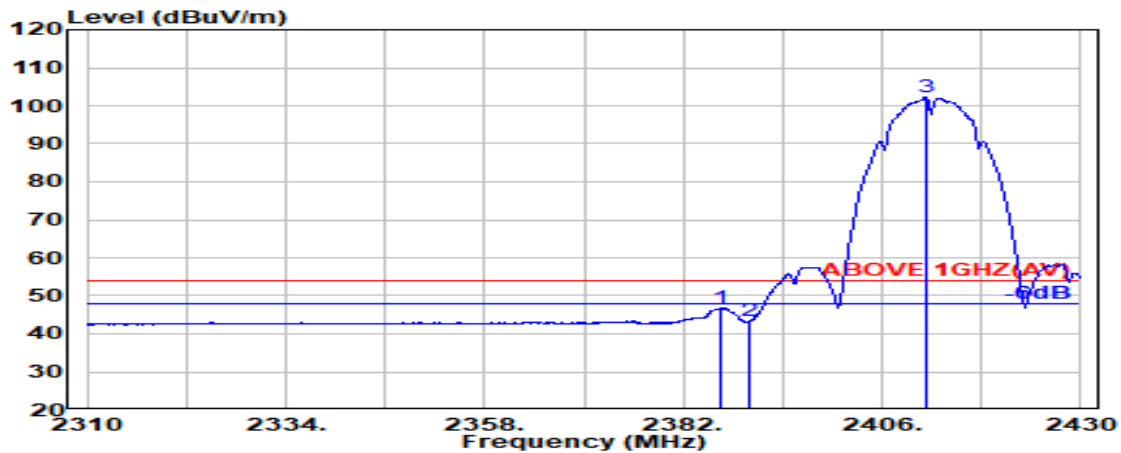


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.600	32.00	5.72	34.51	43.58	46.79	54.00	7.21	Average
2390.000	32.00	5.72	34.51	40.12	43.33	54.00	10.67	Average
@ 2411.200	32.00	5.76	34.51	98.92	102.16	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

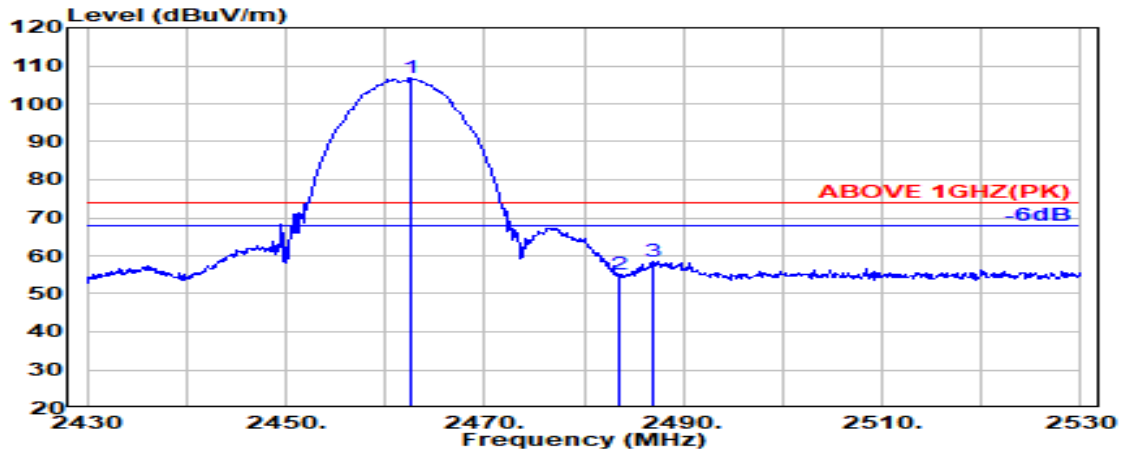

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.600	32.15	5.83	34.52	103.31	106.77	---	---	Peak
2483.500	32.40	5.87	34.53	51.41	55.16	74.00	18.84	Peak
2486.900	32.44	5.87	34.53	54.79	58.58	74.00	15.42	Peak

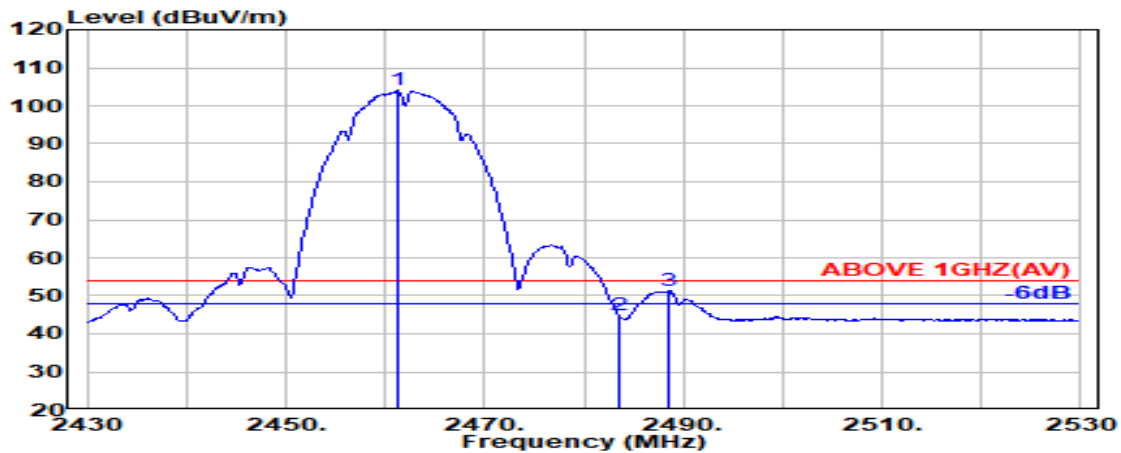


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	32.14	5.83	34.52	100.54	103.99	---	---	Average
2483.500	32.40	5.87	34.53	41.35	45.09	54.00	8.91	Average
2488.600	32.46	5.87	34.53	47.36	51.17	54.00	2.83	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

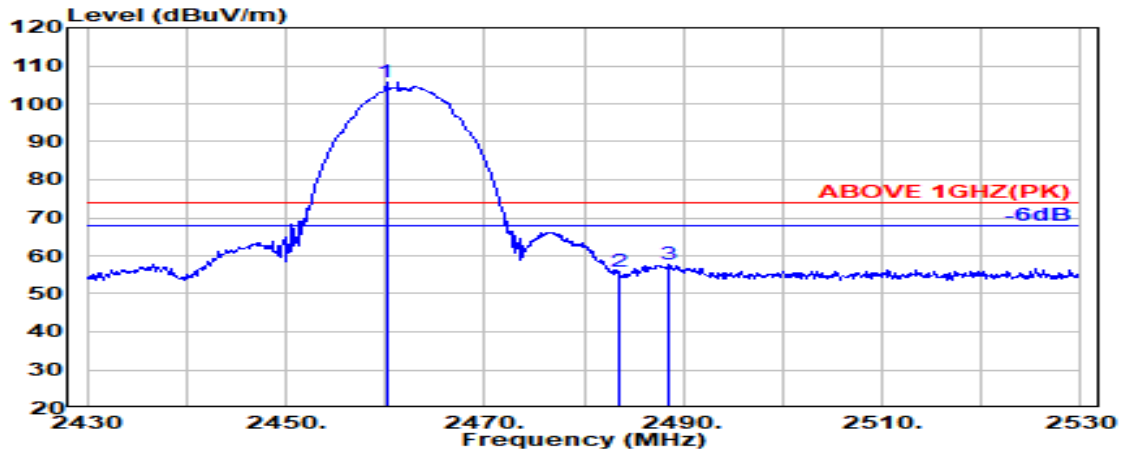

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	32.12	5.83	34.52	102.20	105.63	---	---	Peak
2483.500	32.40	5.87	34.53	52.21	55.95	74.00	18.05	Peak
2488.500	32.46	5.87	34.53	54.09	57.90	74.00	16.10	Peak

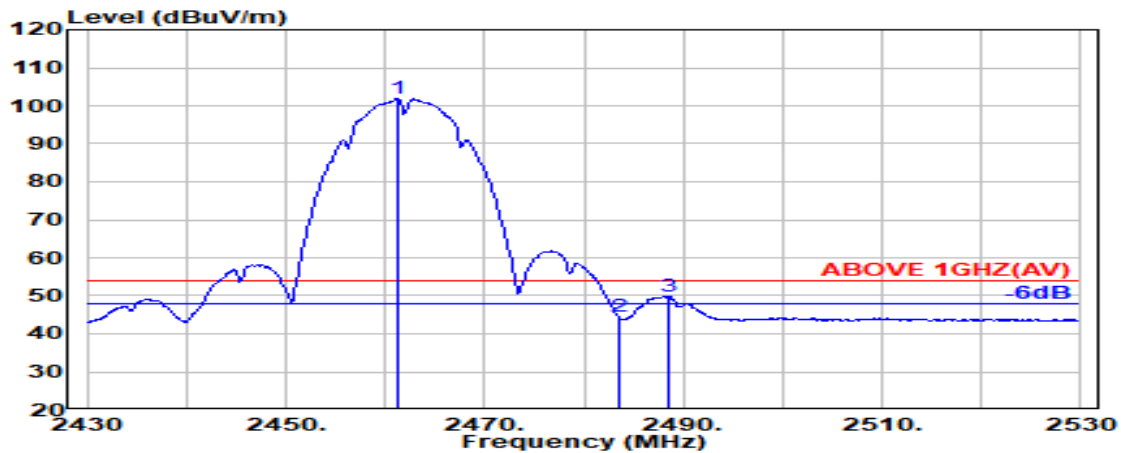


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	32.14	5.83	34.52	98.36	101.80	---	---	Average
2483.500	32.40	5.87	34.53	40.88	44.62	54.00	9.38	Average
2488.400	32.46	5.87	34.53	46.01	49.81	54.00	4.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

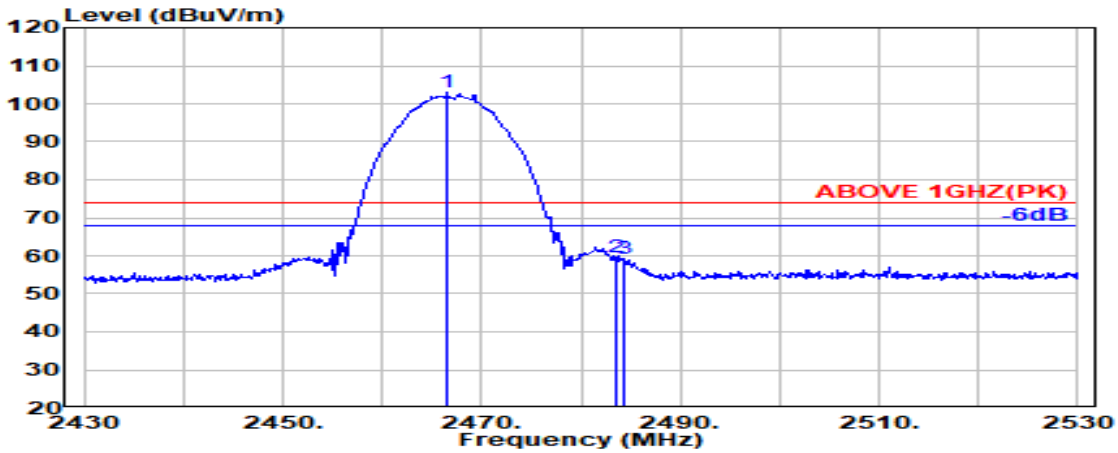

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	32.20	5.84	34.52	99.49	103.00	---	---	Peak
2483.500	32.40	5.87	34.53	56.00	59.74	74.00	14.26	Peak
2484.400	32.41	5.87	34.53	55.33	59.09	74.00	14.91	Peak

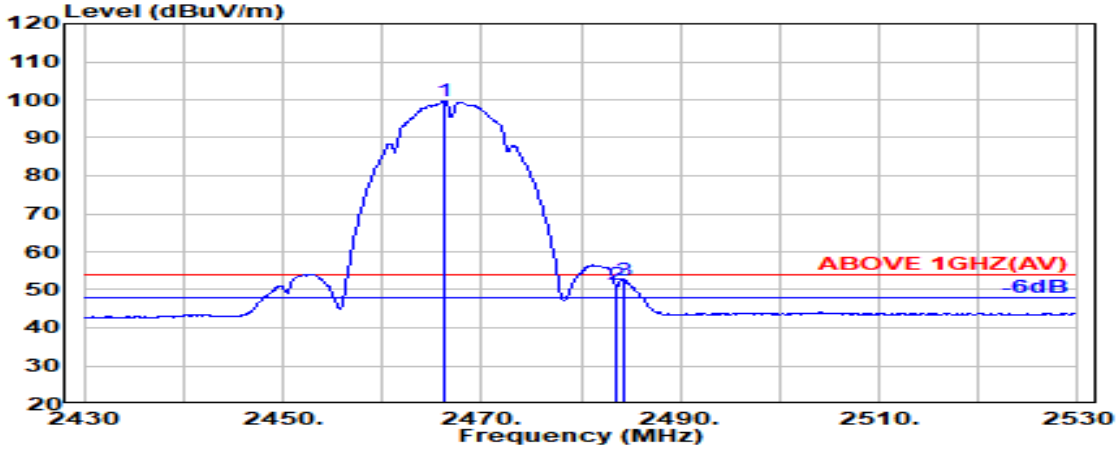


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	32.20	5.84	34.52	96.13	99.65	---	---	Average
2483.500	32.40	5.87	34.53	47.66	51.40	54.00	2.60	Average
2484.400	32.41	5.87	34.53	48.73	52.49	54.00	1.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

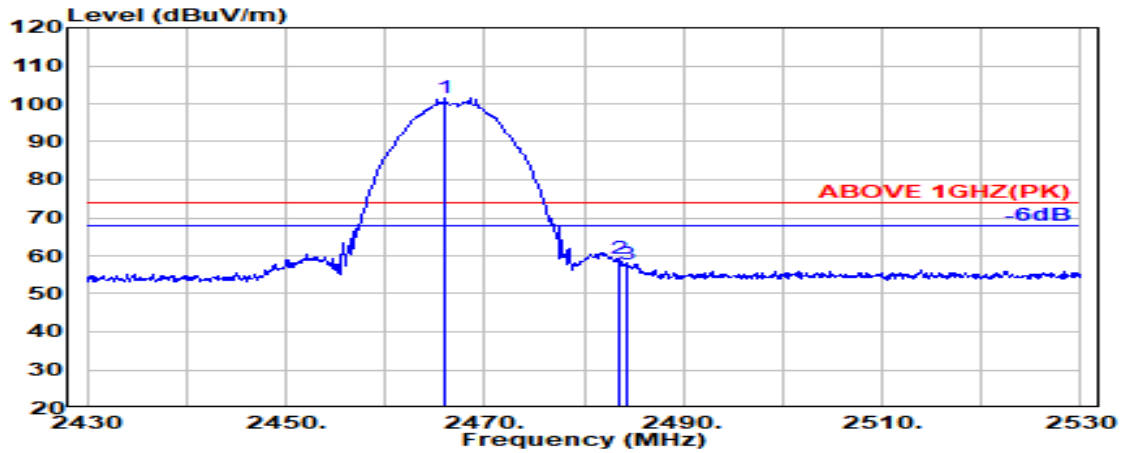

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	32.19	5.84	34.52	97.96	101.47	---	---	Peak
2483.500	32.40	5.87	34.53	55.40	59.14	74.00	14.86	Peak
2484.400	32.41	5.87	34.53	54.11	57.86	74.00	16.14	Peak

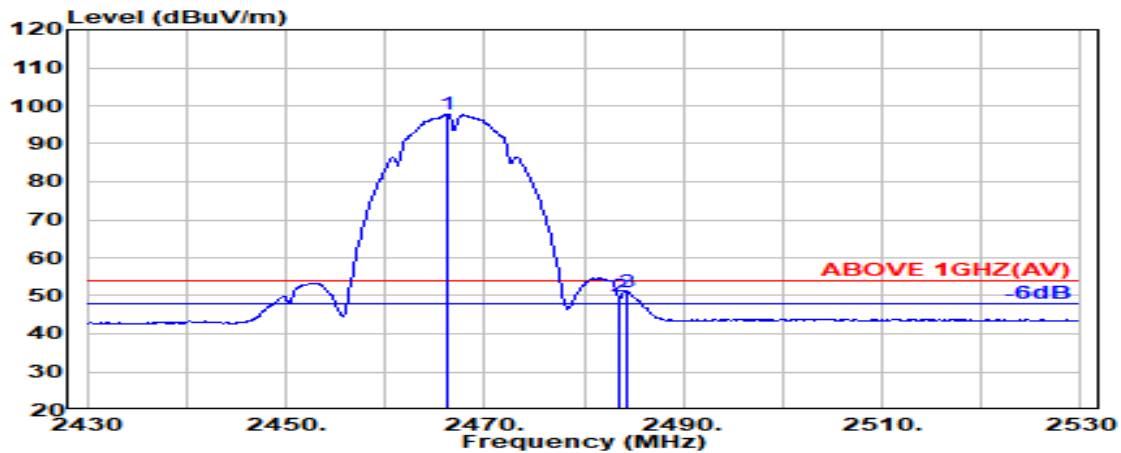


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.20	5.84	34.52	94.30	97.82	---	---	Average
2483.500	32.40	5.87	34.53	46.05	49.80	54.00	4.20	Average
2484.400	32.41	5.87	34.53	47.18	50.94	54.00	3.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

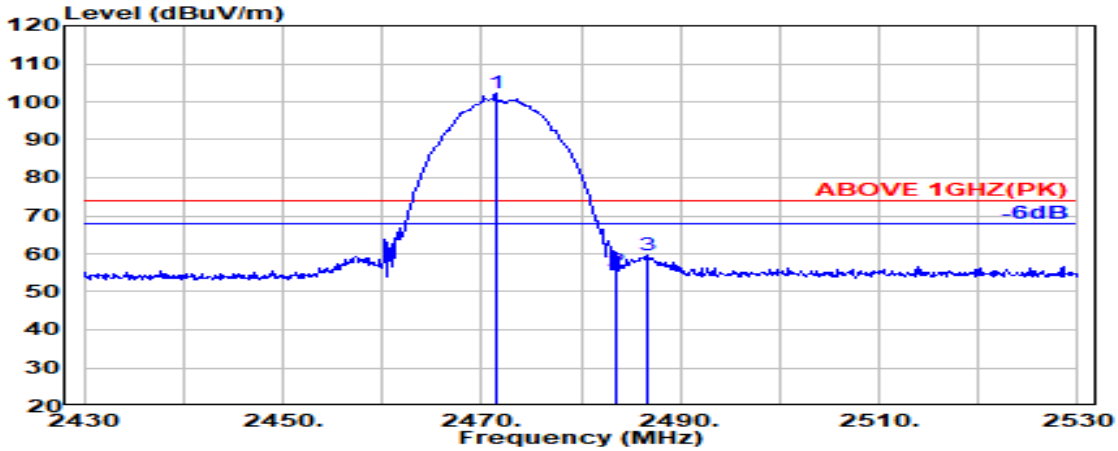

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.400	32.26	5.85	34.52	98.67	102.25	---	---	Peak
2483.500	32.40	5.87	34.53	51.75	55.49	74.00	18.51	Peak
2486.600	32.44	5.87	34.53	55.92	59.70	74.00	14.30	Peak

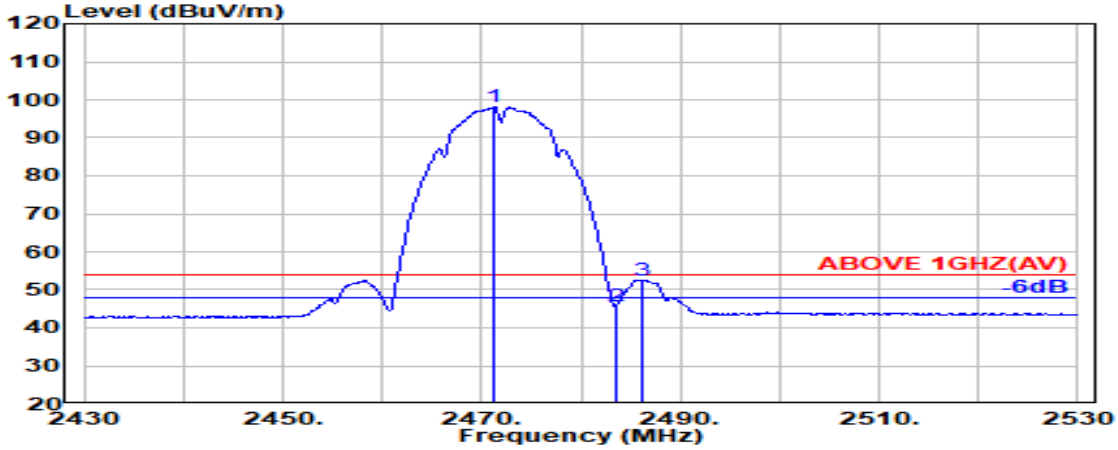


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	32.26	5.85	34.52	94.57	98.15	---	---	Average
2483.500	32.40	5.87	34.53	41.78	45.52	54.00	8.48	Average
2486.100	32.43	5.87	34.53	48.72	52.49	54.00	1.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

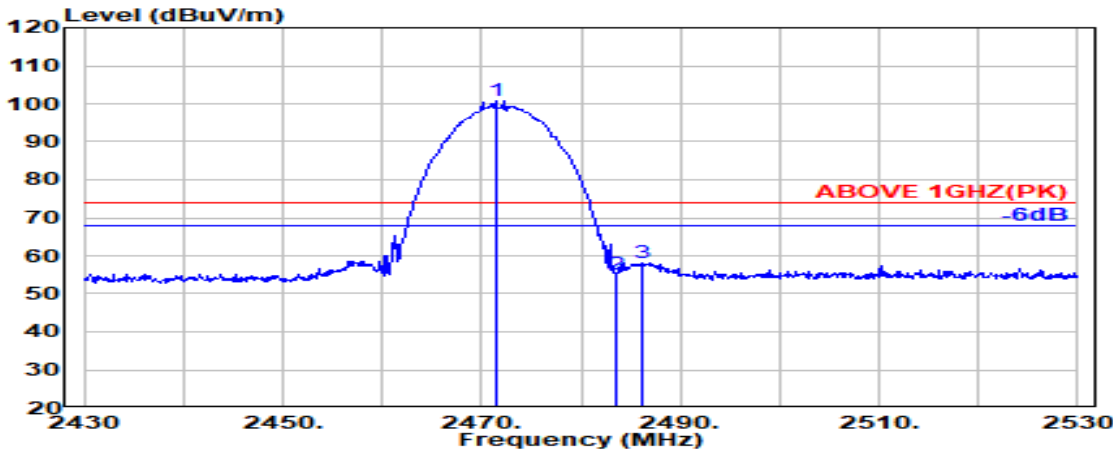

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.400	32.26	5.85	34.52	97.33	100.91	---	---	Peak
2483.500	32.40	5.87	34.53	51.48	55.22	74.00	18.78	Peak
2486.100	32.43	5.87	34.53	54.22	58.00	74.00	16.00	Peak

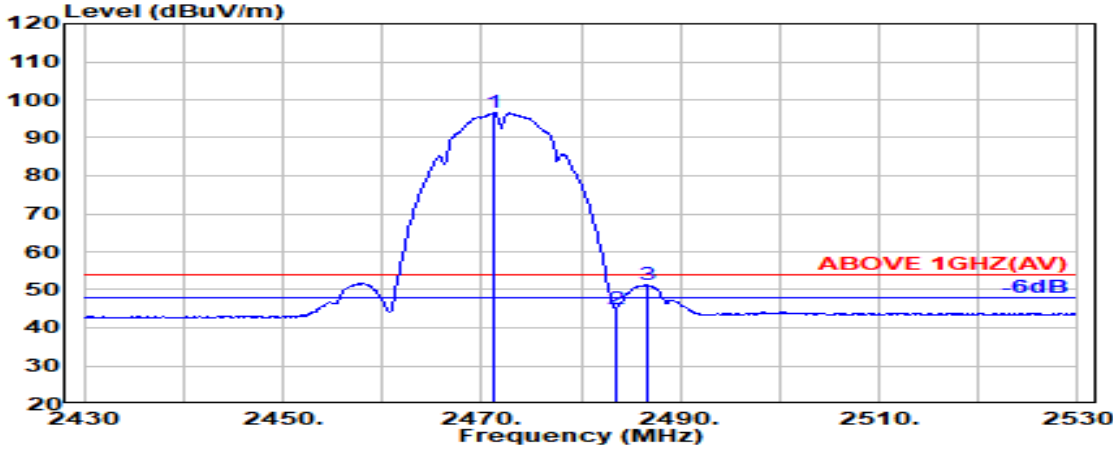


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	32.26	5.85	34.52	93.09	96.67	---	---	Average
2483.500	32.40	5.87	34.53	41.22	44.96	54.00	9.04	Average
2486.600	32.44	5.87	34.53	47.60	51.39	54.00	2.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

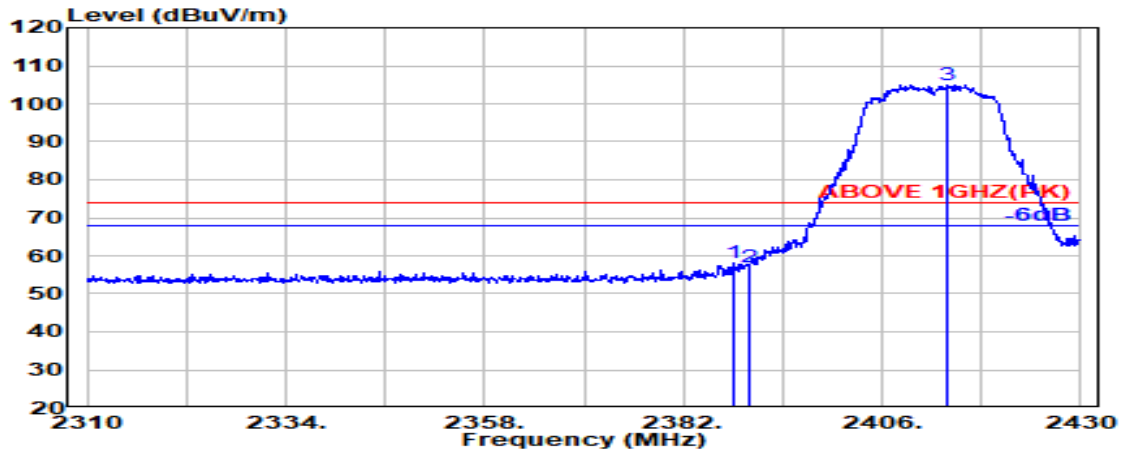

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.100	32.00	5.72	34.51	54.81	58.02	74.00	15.98	Peak
2390.000	32.00	5.72	34.51	53.63	56.85	74.00	17.15	Peak
@ 2414.000	32.00	5.76	34.51	101.75	104.99	---	---	Peak

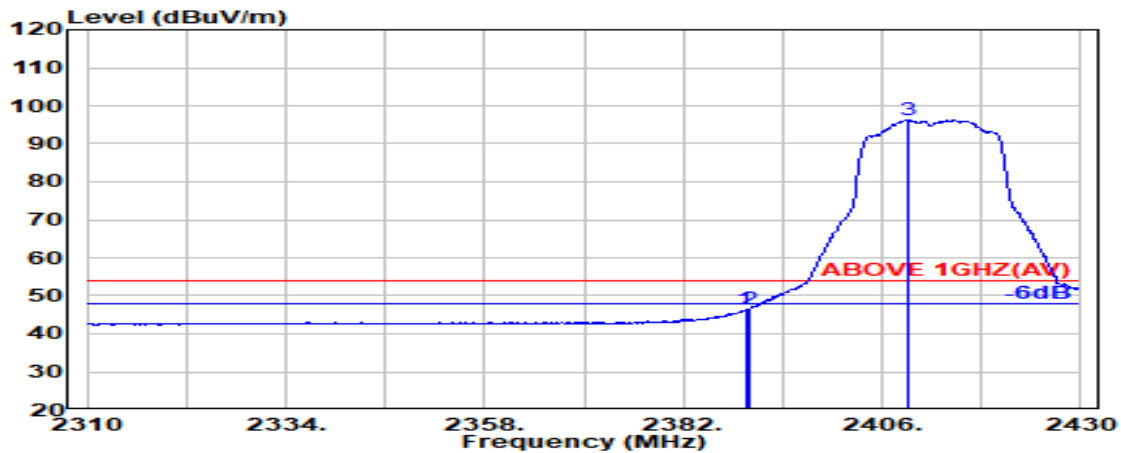


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	43.29	46.50	54.00	7.50	Average
2390.000	32.00	5.72	34.51	43.20	46.42	54.00	7.58	Average
@ 2409.200	32.00	5.75	34.51	92.98	96.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

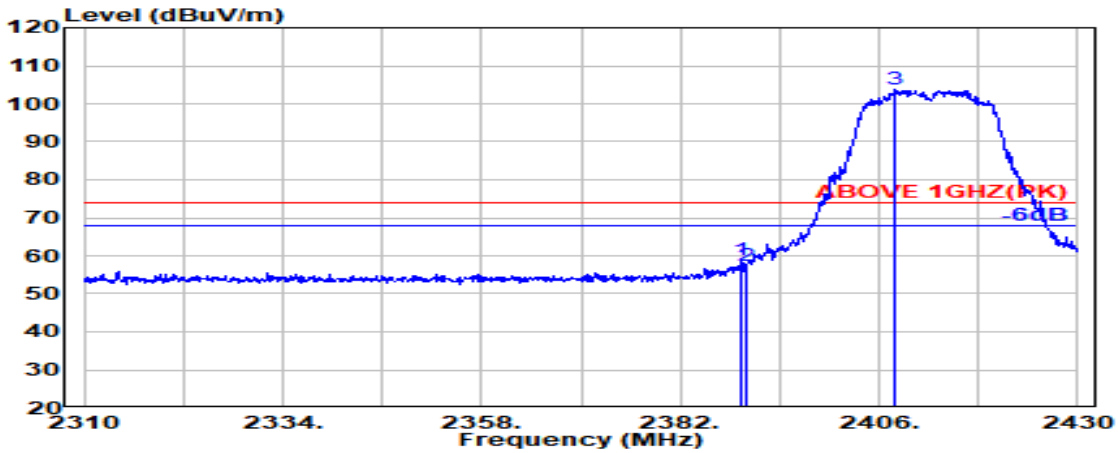

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	32.00	5.72	34.51	55.48	58.69	74.00	15.31	Peak
2390.000	32.00	5.72	34.51	54.01	57.23	74.00	16.77	Peak
@ 2408.000	32.00	5.75	34.51	100.41	103.65	---	---	Peak

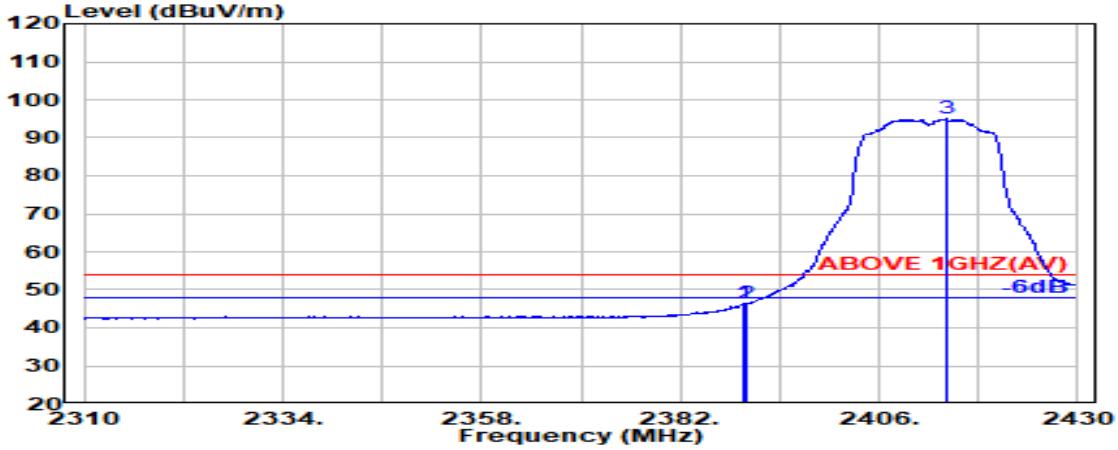


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	32.00	5.72	34.51	43.08	46.29	54.00	7.71	Average
2390.000	32.00	5.72	34.51	43.25	46.47	54.00	7.53	Average
@ 2414.200	32.00	5.76	34.51	91.67	94.92	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

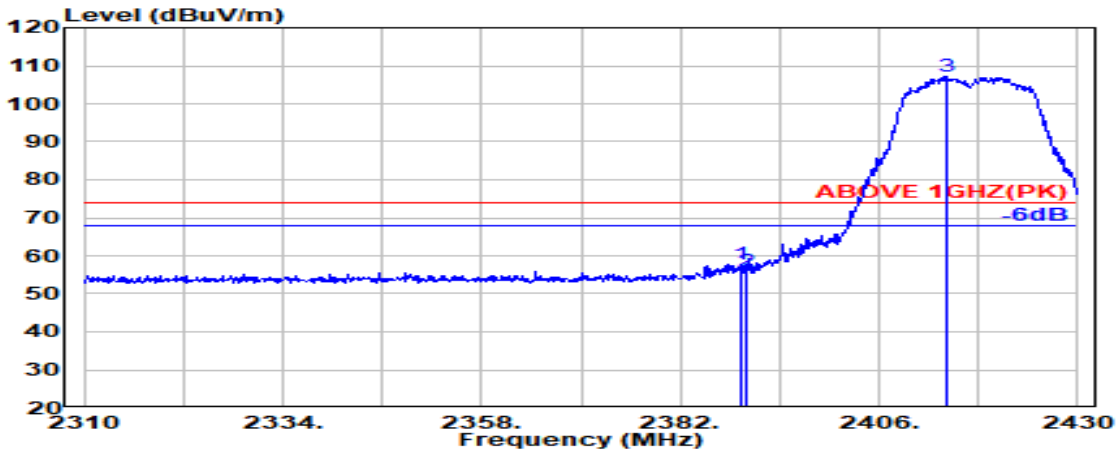

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	32.00	5.72	34.51	54.66	57.87	74.00	16.13	Peak
2390.000	32.00	5.72	34.51	52.76	55.97	74.00	18.03	Peak
@ 2414.100	32.00	5.76	34.51	103.91	107.16	---	---	Peak

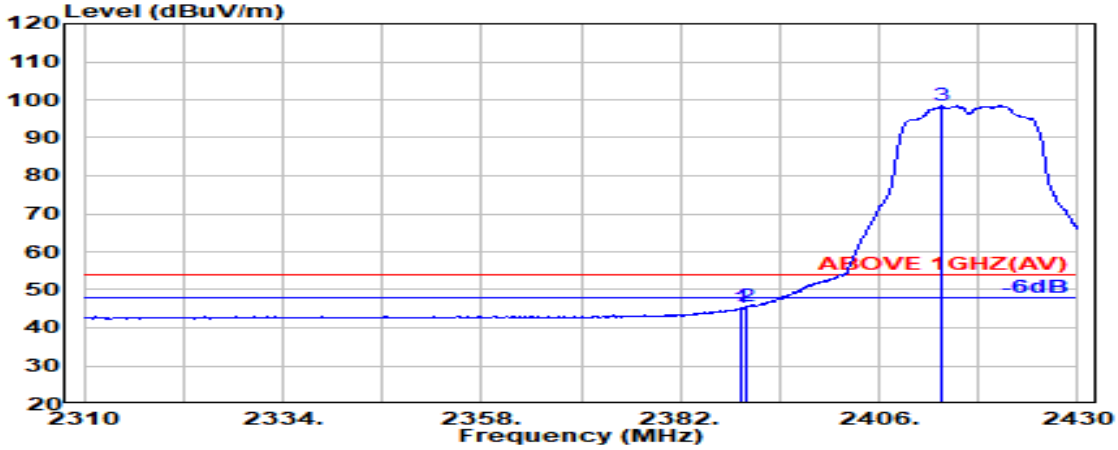


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	41.96	45.17	54.00	8.83	Average
2390.000	32.00	5.72	34.51	42.35	45.56	54.00	8.44	Average
@ 2413.400	32.00	5.76	34.51	95.16	98.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

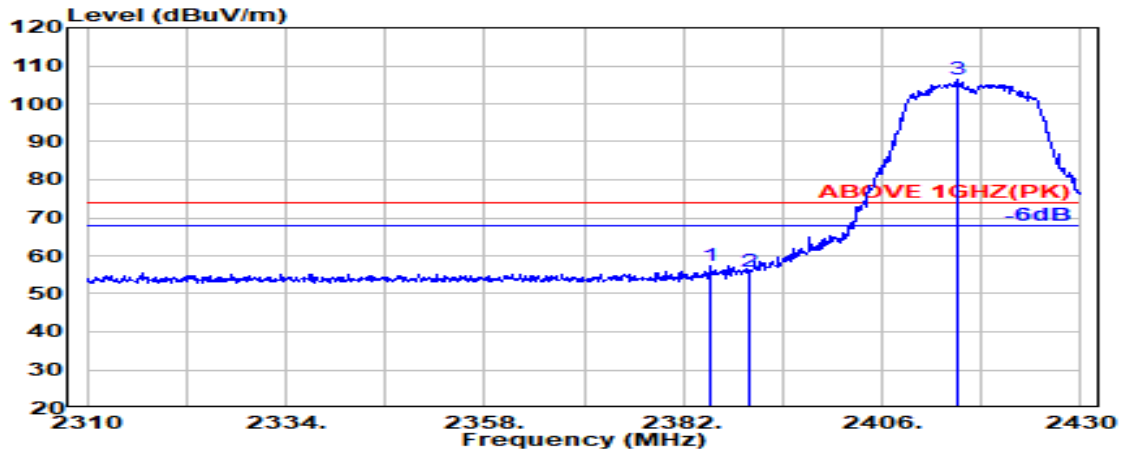

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.300	32.00	5.72	34.51	54.03	57.24	74.00	16.76	Peak
2390.000	32.00	5.72	34.51	52.56	55.78	74.00	18.22	Peak
@ 2415.100	32.00	5.76	34.51	103.11	106.35	---	---	Peak


Antenna at Vertical Polarization

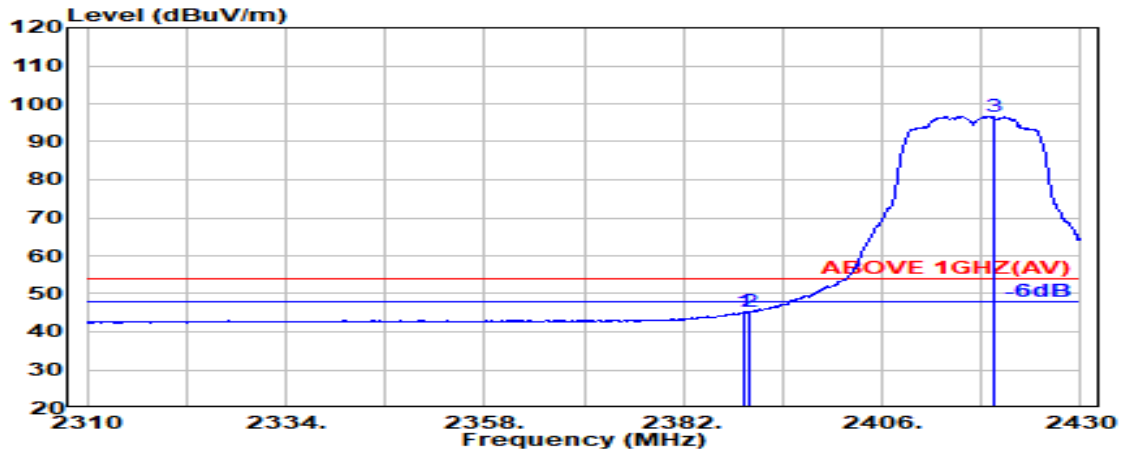

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	32.00	5.72	34.51	42.01	45.23	54.00	8.77	Average
2390.000	32.00	5.72	34.51	41.99	45.20	54.00	8.80	Average
@ 2419.400	32.00	5.77	34.51	93.45	96.71	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

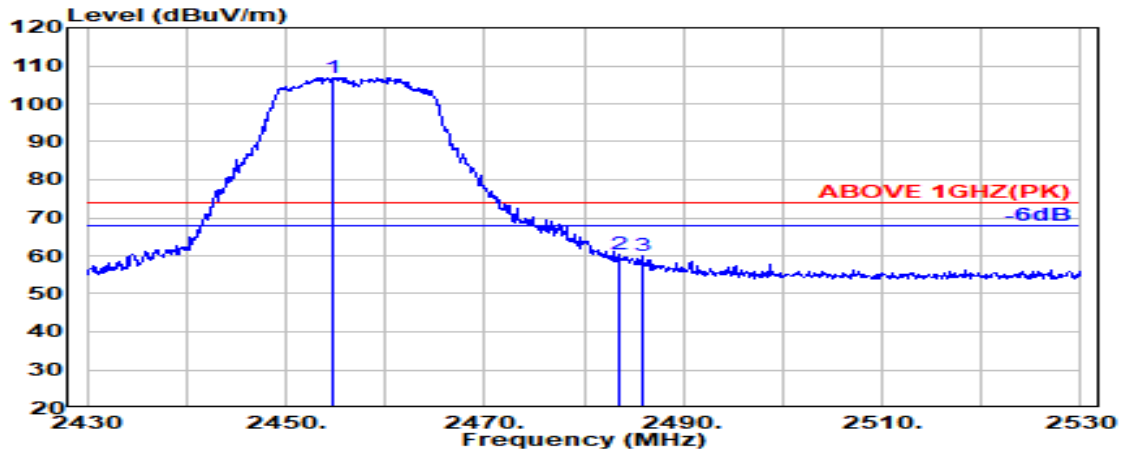

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.700	32.06	5.82	34.52	103.55	106.91	---	---	Peak
2483.500	32.40	5.87	34.53	56.69	60.43	74.00	13.57	Peak
2485.800	32.43	5.87	34.53	56.40	60.17	74.00	13.83	Peak

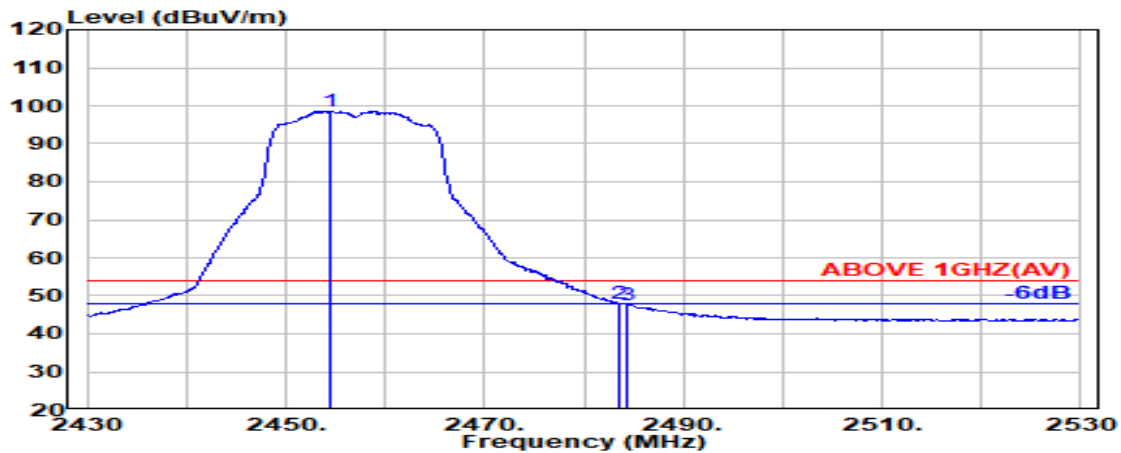


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	32.05	5.82	34.52	95.21	98.57	---	---	Average
2483.500	32.40	5.87	34.53	44.15	47.89	54.00	6.11	Average
2484.400	32.41	5.87	34.53	43.92	47.68	54.00	6.32	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

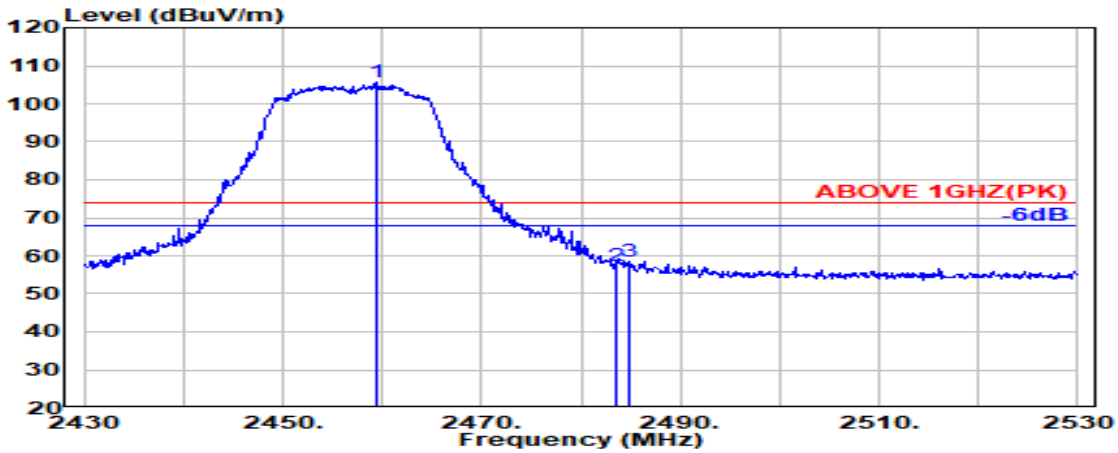

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.11	5.83	34.52	102.33	105.75	---	---	Peak
2483.500	32.40	5.87	34.53	53.59	57.33	74.00	16.67	Peak
2484.900	32.42	5.87	34.53	54.75	58.51	74.00	15.49	Peak

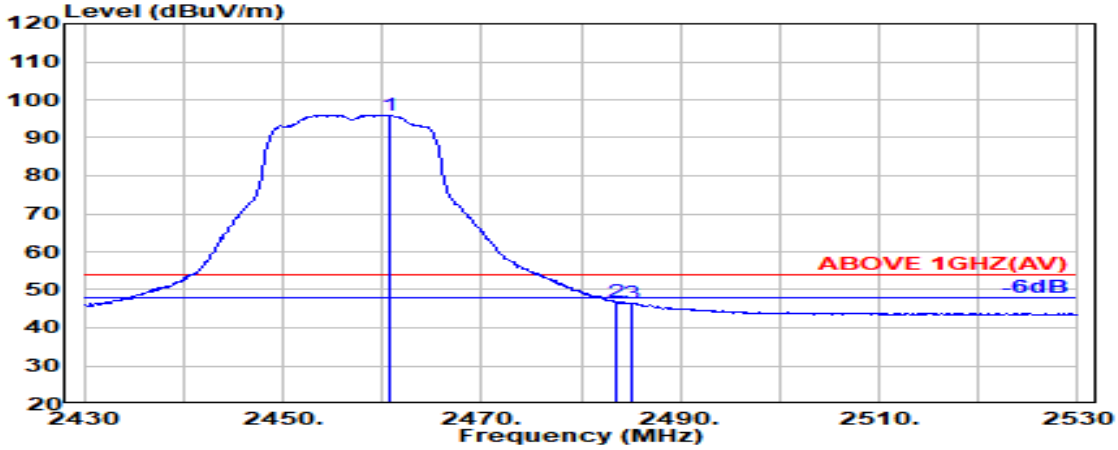

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	32.13	5.83	34.52	92.59	96.03	---	---	Average
2483.500	32.40	5.87	34.53	43.22	46.97	54.00	7.03	Average
2485.100	32.42	5.87	34.53	42.71	46.47	54.00	7.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.600	32.19	5.84	34.52	101.93	105.44	---	---	Peak
2483.500	32.40	5.87	34.53	61.08	64.83	74.00	9.17	Peak
2485.000	32.42	5.87	34.53	57.88	61.65	74.00	12.35	Peak




Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	32.13	5.83	34.52	93.27	96.70	---	---	Average
2483.500	32.40	5.87	34.53	46.77	50.51	54.00	3.49	Average
2484.500	32.42	5.87	34.53	45.63	49.38	54.00	4.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

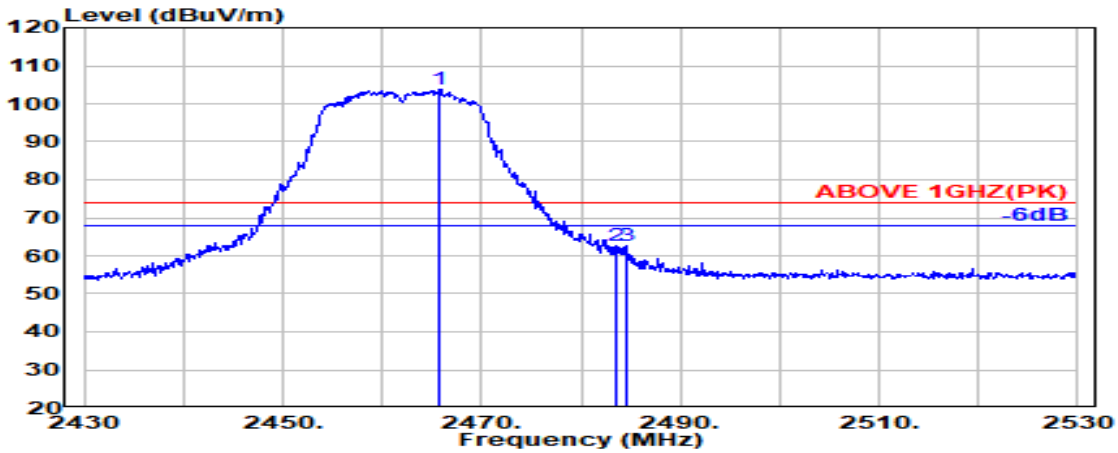

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	32.19	5.84	34.52	100.21	103.72	---	---	Peak
2483.500	32.40	5.87	34.53	58.72	62.46	74.00	11.54	Peak
2484.600	32.42	5.87	34.53	58.83	62.58	74.00	11.42	Peak

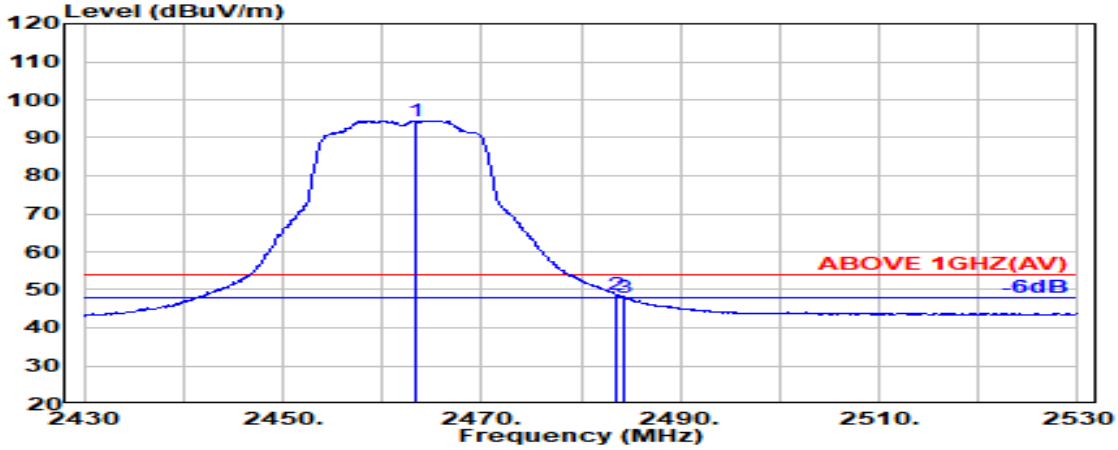


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	32.16	5.84	34.52	91.05	94.52	---	---	Average
2483.500	32.40	5.87	34.53	45.03	48.77	54.00	5.23	Average
2484.400	32.41	5.87	34.53	44.19	47.94	54.00	6.06	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

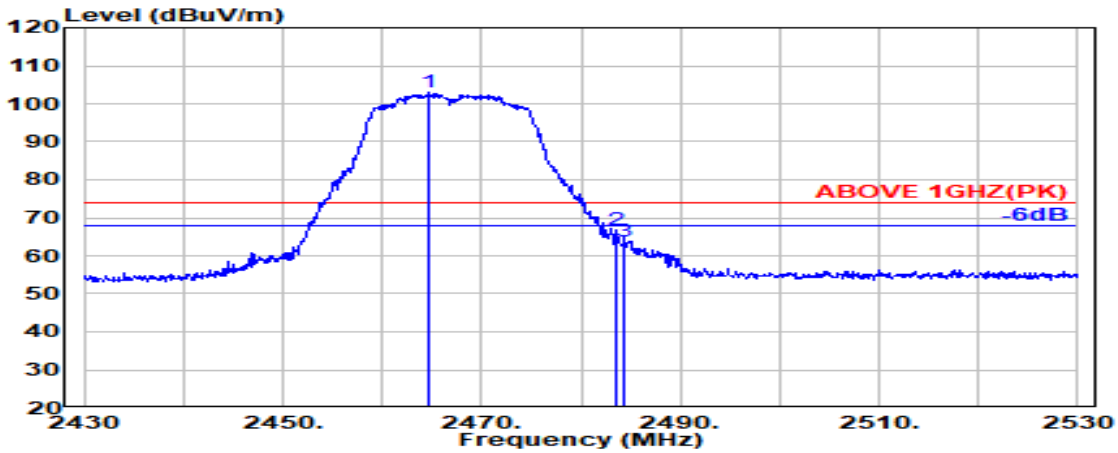

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	32.18	5.84	34.52	99.37	102.86	---	---	Peak
2483.500	32.40	5.87	34.53	63.11	66.85	74.00	7.15	Peak
2484.400	32.41	5.87	34.53	60.20	63.95	74.00	10.05	Peak

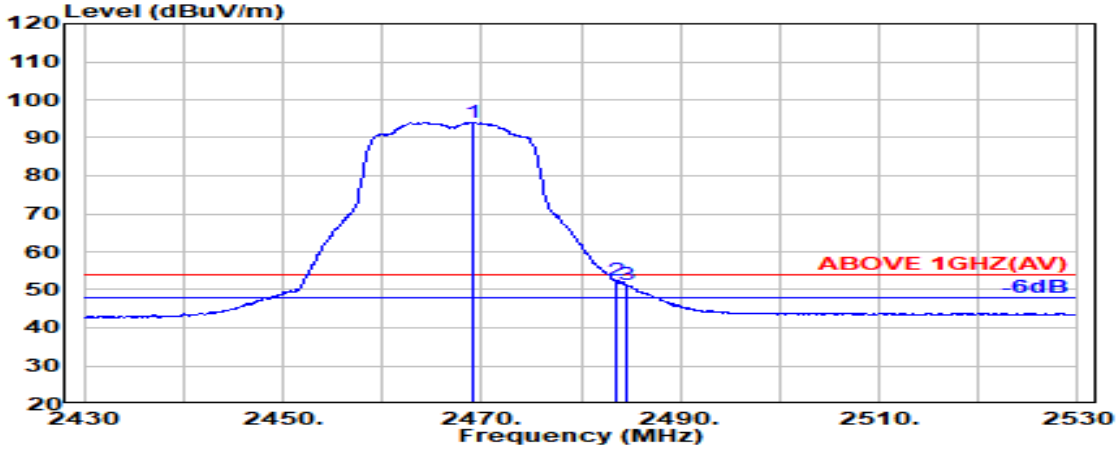


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.100	32.23	5.84	34.52	90.54	94.09	---	---	Average
2483.500	32.40	5.87	34.53	48.63	52.37	54.00	1.63	Average
2484.500	32.42	5.87	34.53	47.69	51.45	54.00	2.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

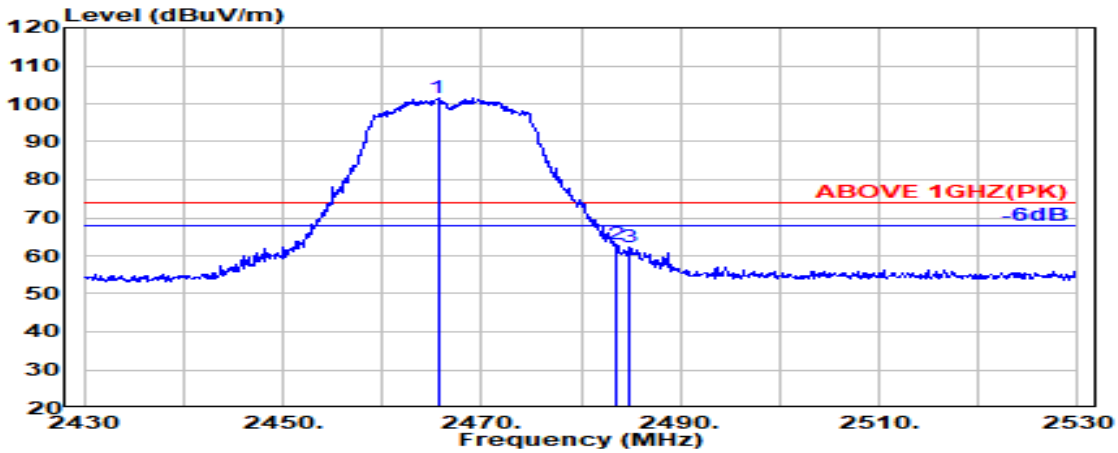

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.600	32.19	5.84	34.52	97.86	101.36	---	---	Peak
2483.500	32.40	5.87	34.53	59.36	63.10	74.00	10.90	Peak
2484.800	32.42	5.87	34.53	58.54	62.30	74.00	11.70	Peak

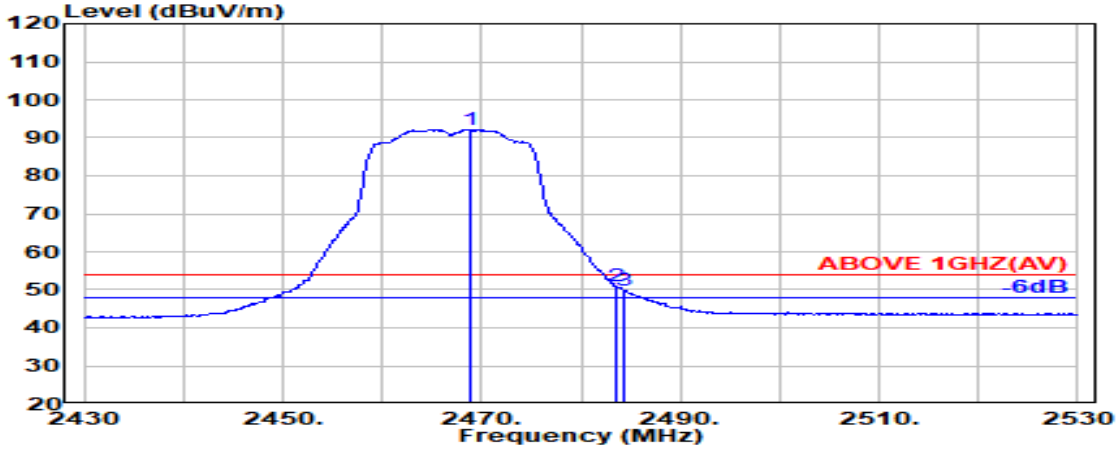


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	32.23	5.84	34.52	88.57	92.12	---	---	Average
2483.500	32.40	5.87	34.53	47.07	50.81	54.00	3.19	Average
2484.400	32.41	5.87	34.53	46.01	49.76	54.00	4.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

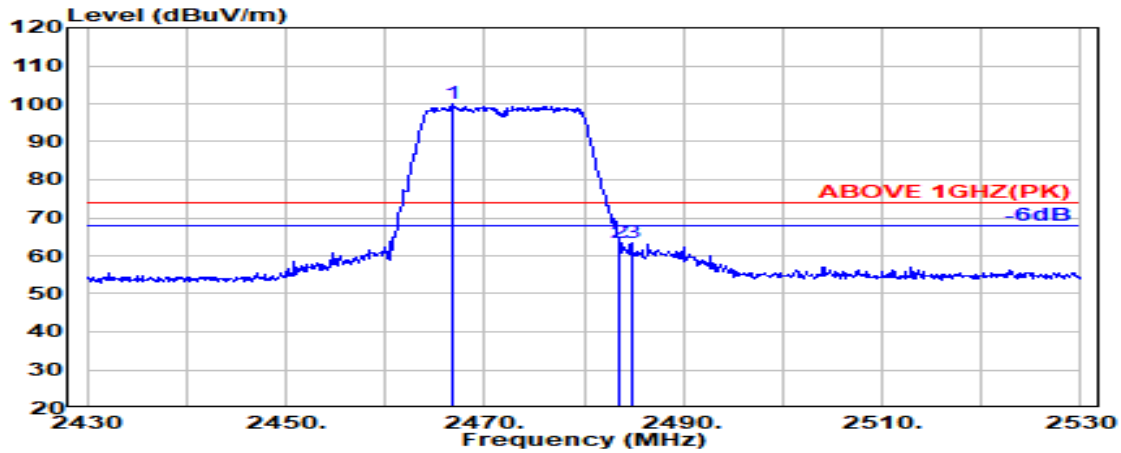

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.900	32.20	5.84	34.52	96.29	99.81	---	---	Peak
2483.500	32.40	5.87	34.53	59.64	63.38	74.00	10.62	Peak
2484.800	32.42	5.87	34.53	59.66	63.42	74.00	10.58	Peak

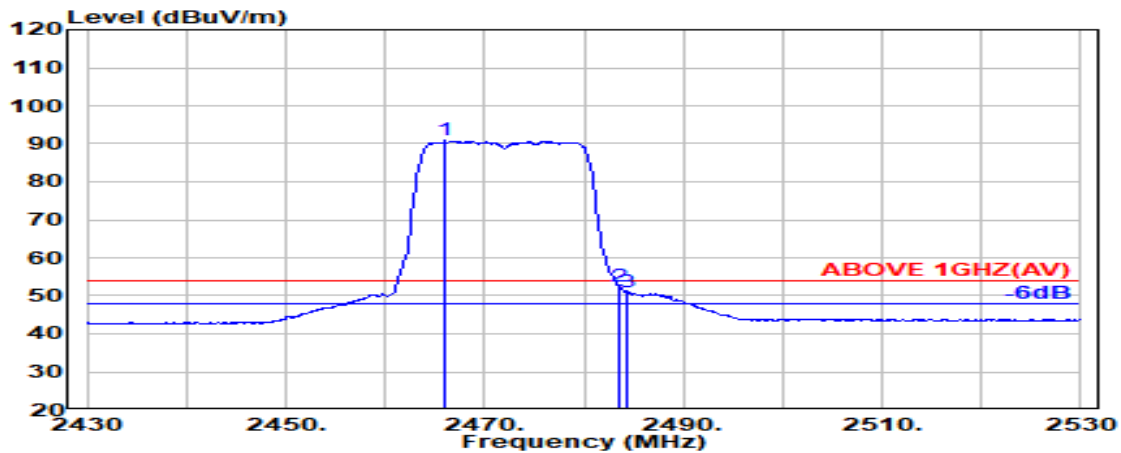


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	32.19	5.84	34.52	87.26	90.77	---	---	Average
2483.500	32.40	5.87	34.53	48.67	52.41	54.00	1.59	Average
2484.400	32.41	5.87	34.53	47.36	51.12	54.00	2.88	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

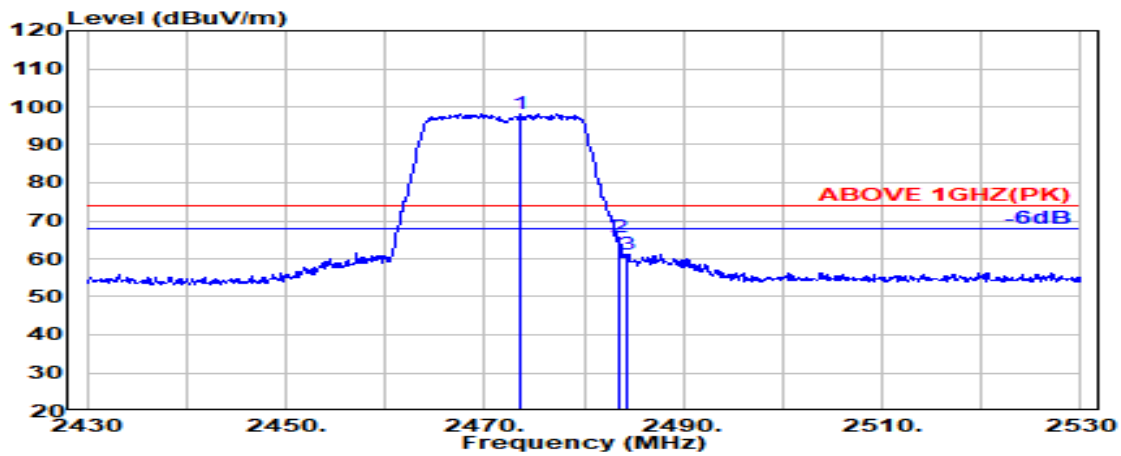

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.600	32.28	5.85	34.52	94.56	98.17	---	---	Peak
2483.500	32.40	5.87	34.53	61.80	65.54	74.00	8.46	Peak
2484.400	32.41	5.87	34.53	57.31	61.07	74.00	12.93	Peak




Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.100	32.33	5.86	34.53	85.64	89.30	---	---	Average
2483.500	32.40	5.87	34.53	47.67	51.41	54.00	2.59	Average
2485.200	32.42	5.87	34.53	45.83	49.60	54.00	4.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

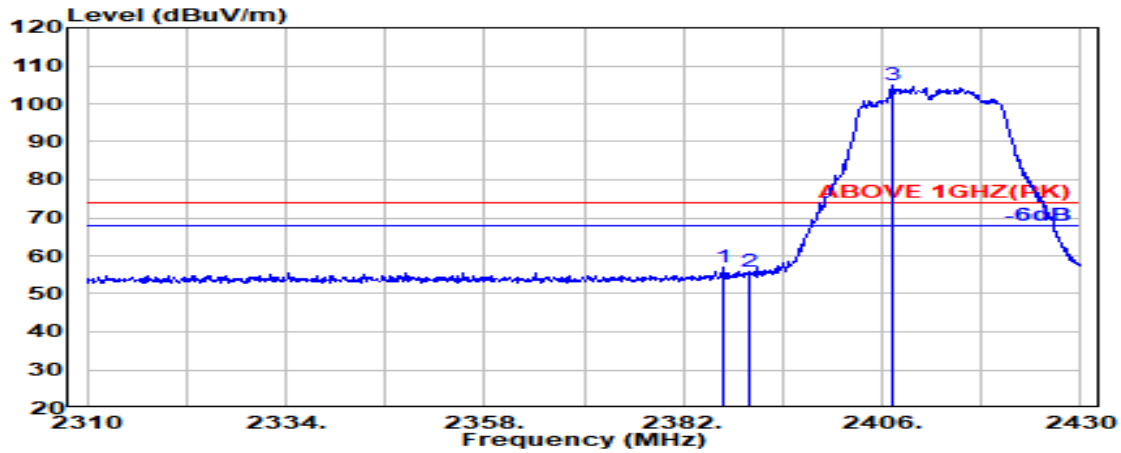

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.900	32.00	5.72	34.51	53.59	56.80	74.00	17.20	Peak
2390.000	32.00	5.72	34.51	52.56	55.78	74.00	18.22	Peak
@ 2407.400	32.00	5.75	34.51	101.53	104.77	---	---	Peak

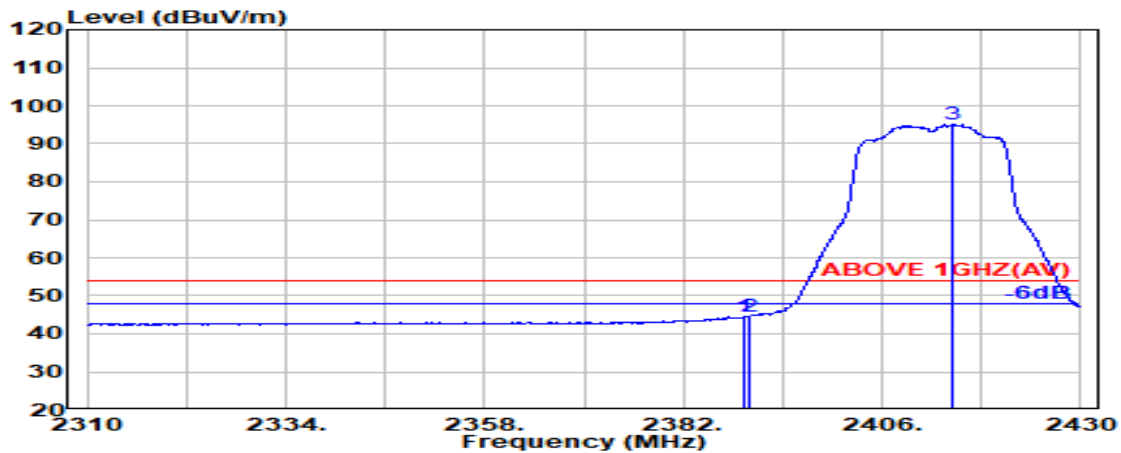


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	32.00	5.72	34.51	41.22	44.43	54.00	9.57	Average
2390.000	32.00	5.72	34.51	41.39	44.60	54.00	9.40	Average
@ 2414.600	32.00	5.76	34.51	91.72	94.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

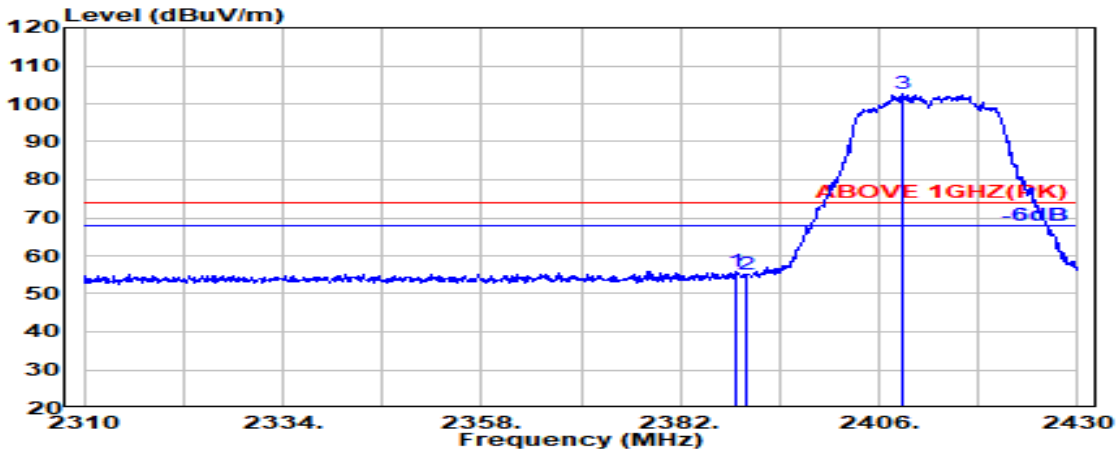

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	32.00	5.72	34.51	52.76	55.97	74.00	18.03	Peak
2390.000	32.00	5.72	34.51	51.81	55.03	74.00	18.97	Peak
@ 2408.800	32.00	5.75	34.51	99.44	102.68	---	---	Peak

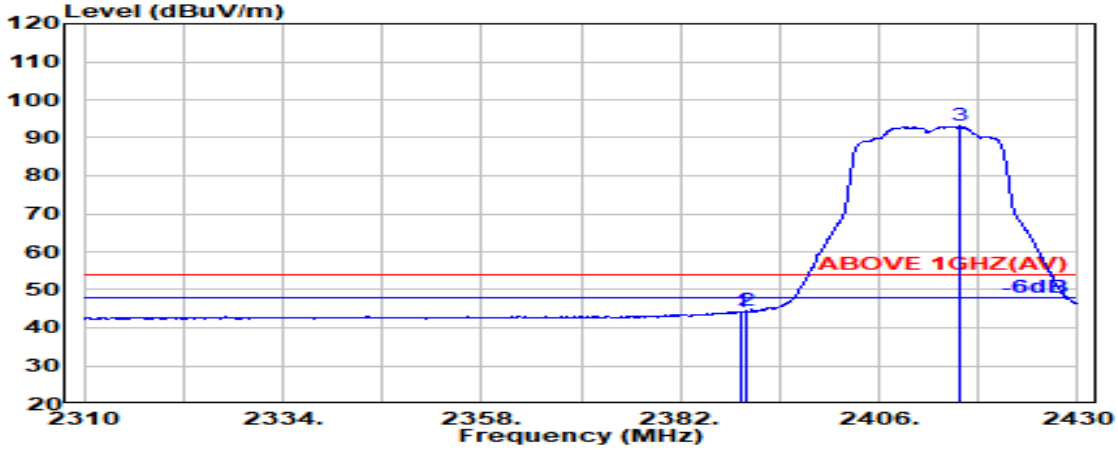


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	32.00	5.72	34.51	41.13	44.34	54.00	9.66	Average
2390.000	32.00	5.72	34.51	41.35	44.57	54.00	9.43	Average
@ 2415.600	32.00	5.76	34.51	89.86	93.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

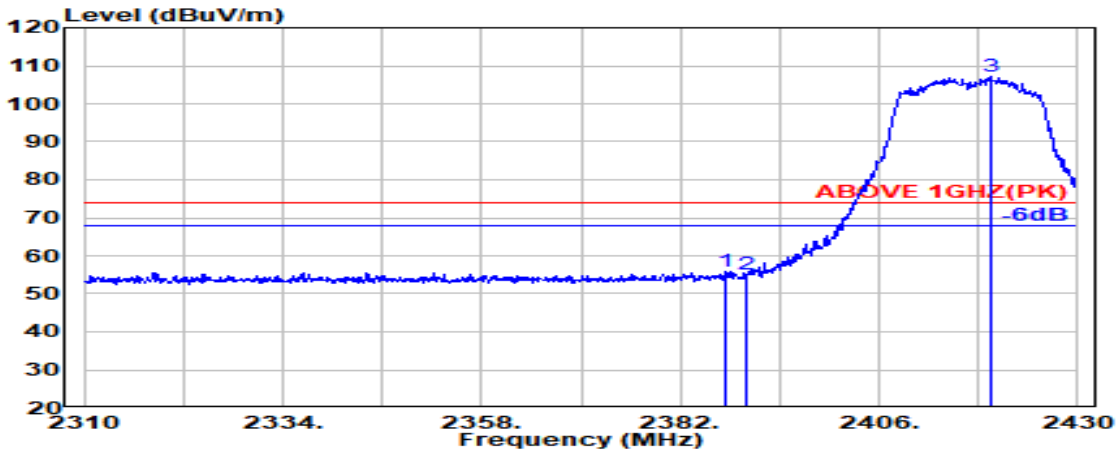

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	32.00	5.72	34.51	52.72	55.93	74.00	18.07	Peak
2390.000	32.00	5.72	34.51	51.99	55.20	74.00	18.80	Peak
@ 2419.500	32.00	5.77	34.51	103.84	107.09	---	---	Peak

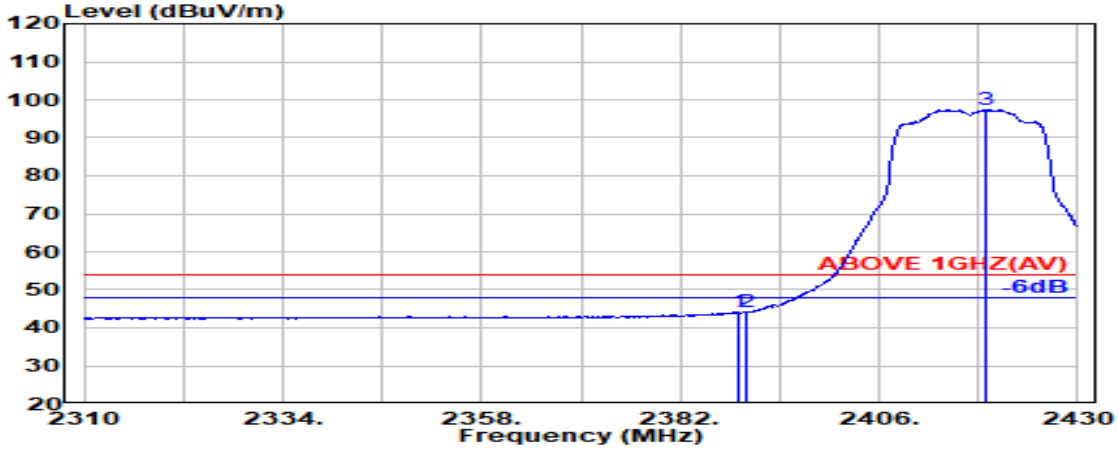


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	32.00	5.72	34.51	40.97	44.18	54.00	9.82	Average
2390.000	32.00	5.72	34.51	40.87	44.08	54.00	9.92	Average
@ 2419.000	32.00	5.77	34.51	94.16	97.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

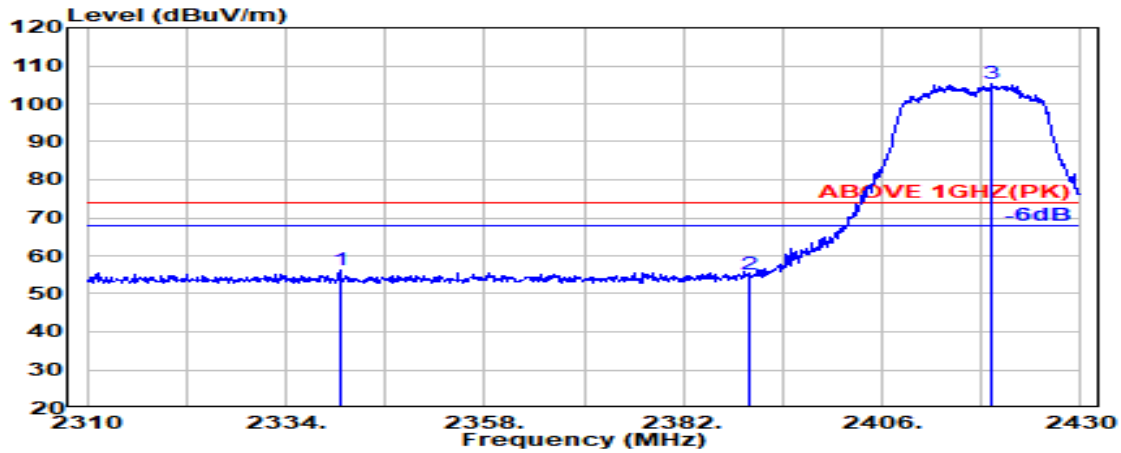

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2340.500	32.04	5.64	34.50	52.96	56.14	74.00	17.86	Peak
2390.000	32.00	5.72	34.51	51.78	54.99	74.00	19.01	Peak
@ 2419.300	32.00	5.77	34.51	101.86	105.12	---	---	Peak

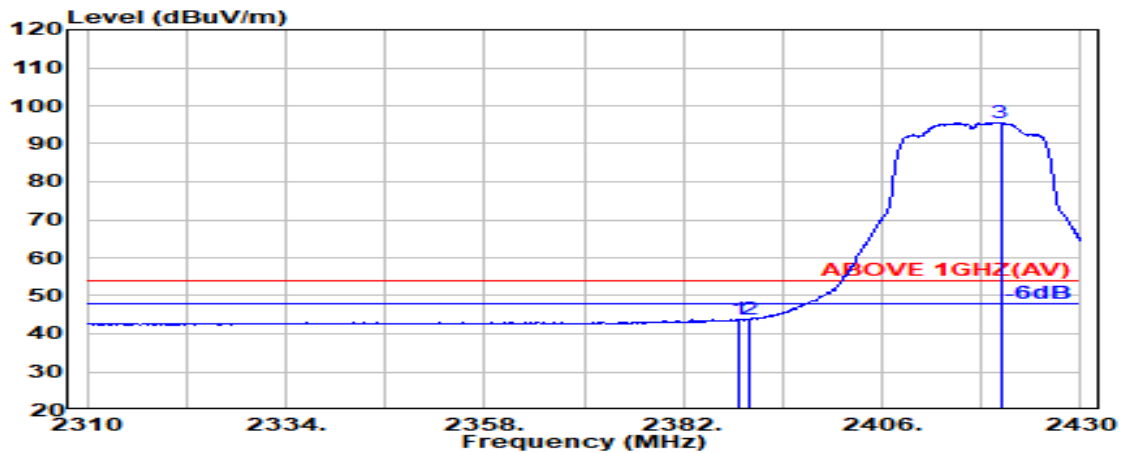


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	32.00	5.72	34.51	40.60	43.81	54.00	10.19	Average
2390.000	32.00	5.72	34.51	40.66	43.87	54.00	10.13	Average
@ 2420.300	32.00	5.77	34.51	92.22	95.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

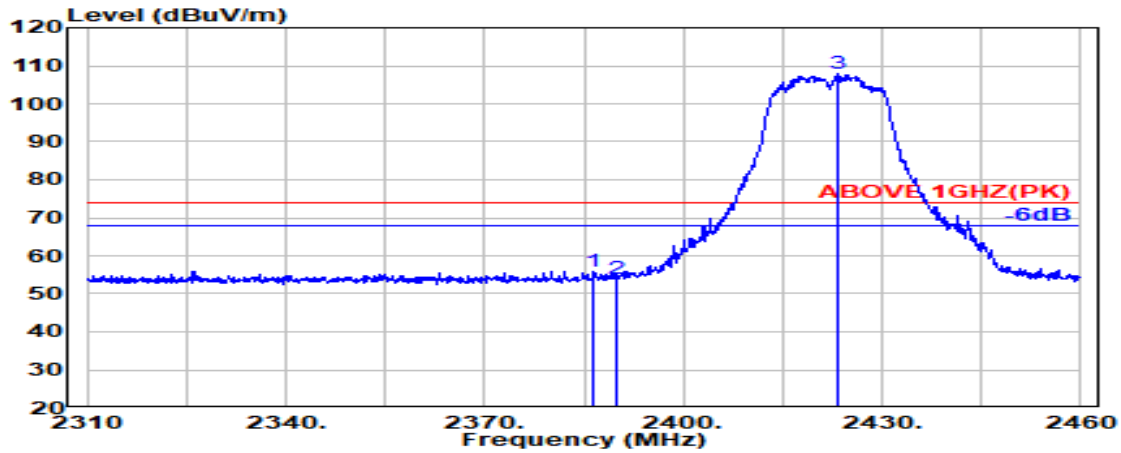

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.400	32.00	5.72	34.51	52.71	55.92	74.00	18.08	Peak
2390.000	32.00	5.72	34.51	50.89	54.10	74.00	19.90	Peak
@ 2423.200	32.00	5.77	34.51	104.52	107.78	---	---	Peak

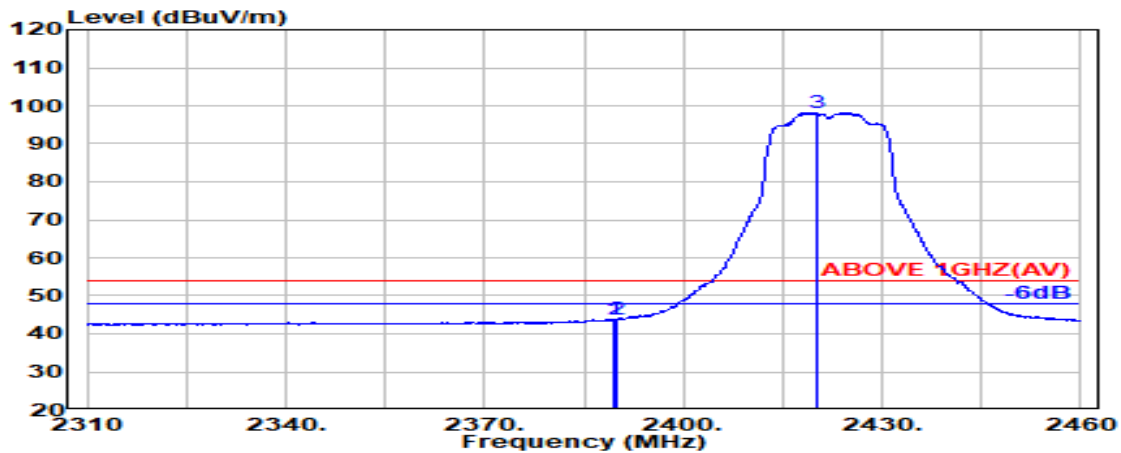


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	40.74	43.95	54.00	10.05	Average
2390.000	32.00	5.72	34.51	40.47	43.69	54.00	10.31	Average
@ 2420.100	32.00	5.77	34.51	94.95	98.21	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

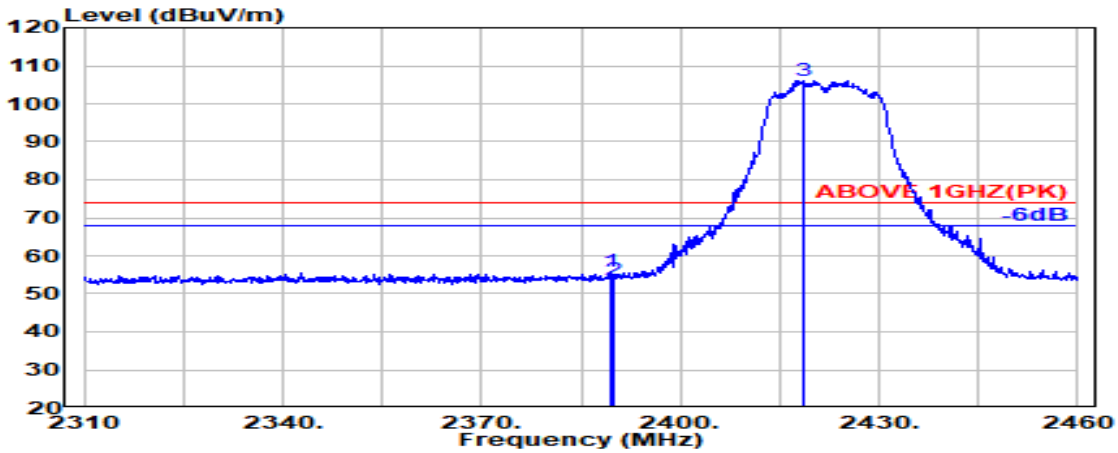

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	32.00	5.72	34.51	52.56	55.77	74.00	18.23	Peak
2390.000	32.00	5.72	34.51	50.52	53.73	74.00	20.27	Peak
@ 2418.600	32.00	5.77	34.51	102.94	106.20	---	---	Peak

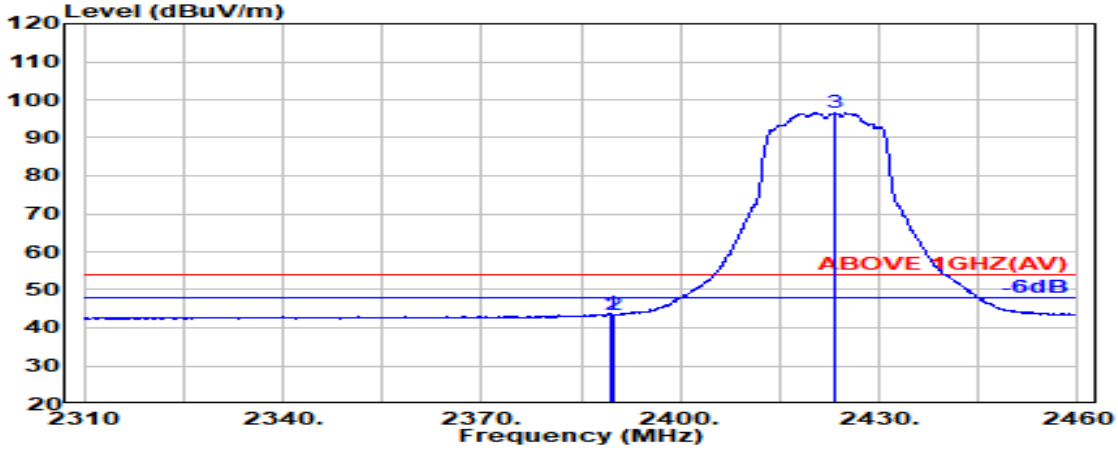


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	40.47	43.68	54.00	10.32	Average
2390.000	32.00	5.72	34.51	40.34	43.55	54.00	10.45	Average
@ 2423.500	32.00	5.77	34.51	93.24	96.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

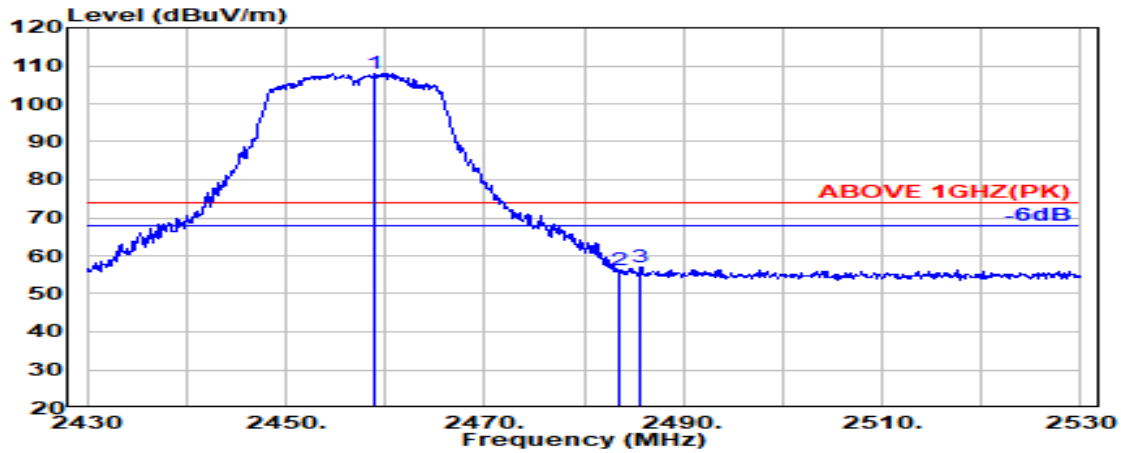

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	32.11	5.83	34.52	104.64	108.06	---	---	Peak
2483.500	32.40	5.87	34.53	52.56	56.30	74.00	17.70	Peak
2485.700	32.43	5.87	34.53	53.26	57.03	74.00	16.97	Peak

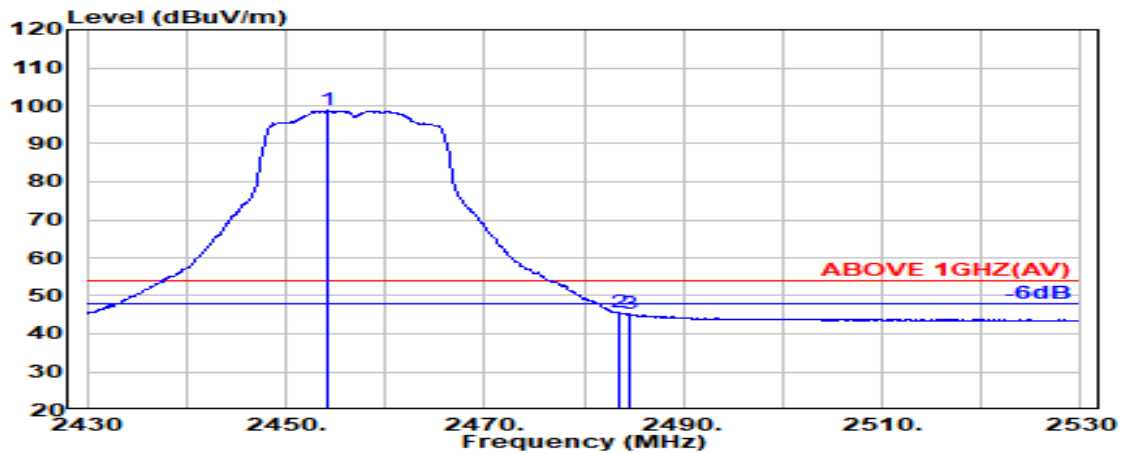


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.300	32.05	5.82	34.52	95.39	98.74	---	---	Average
2483.500	32.40	5.87	34.53	41.74	45.48	54.00	8.52	Average
2484.700	32.42	5.87	34.53	41.43	45.19	54.00	8.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

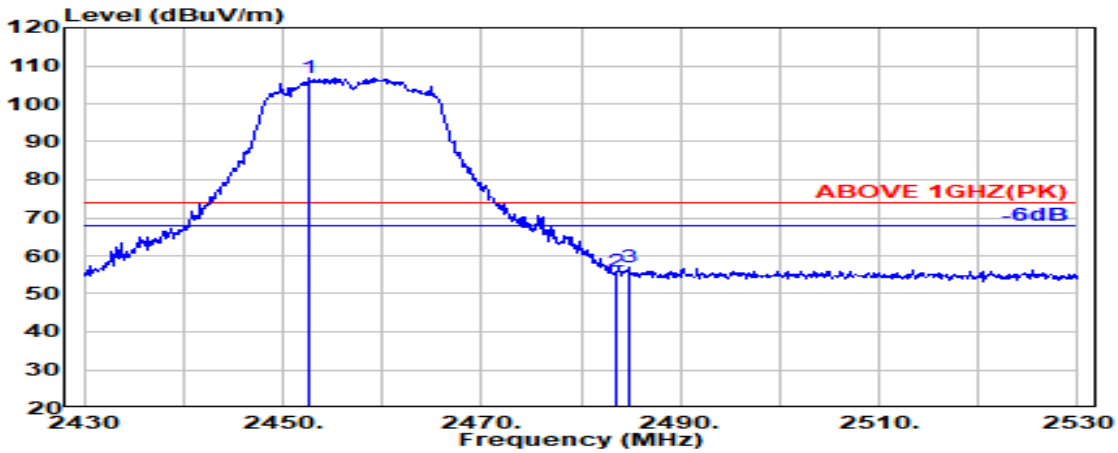

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.600	32.03	5.82	34.52	103.61	106.94	---	---	Peak
2483.500	32.40	5.87	34.53	52.14	55.88	74.00	18.12	Peak
2484.800	32.42	5.87	34.53	53.35	57.11	74.00	16.89	Peak

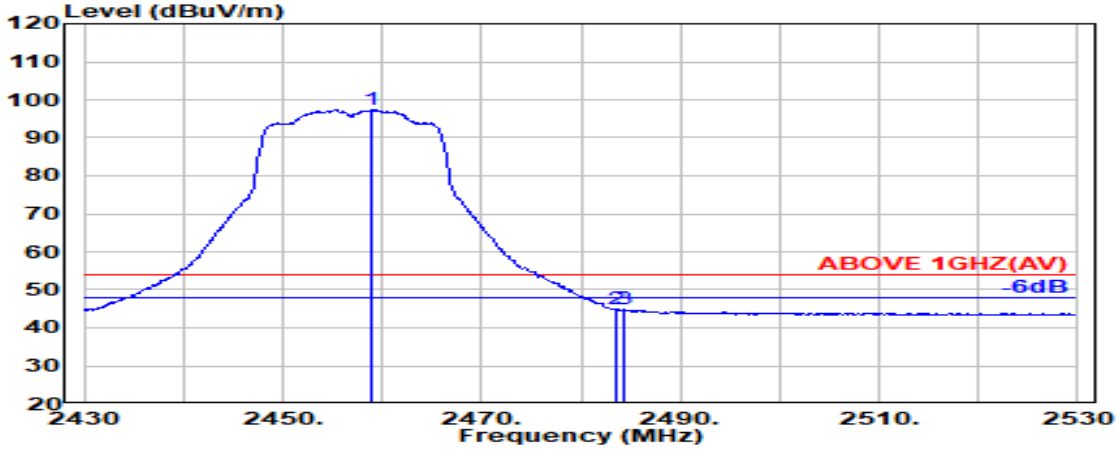


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	32.11	5.83	34.52	93.90	97.32	---	---	Average
2483.500	32.40	5.87	34.53	41.17	44.91	54.00	9.09	Average
2484.400	32.41	5.87	34.53	41.00	44.75	54.00	9.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

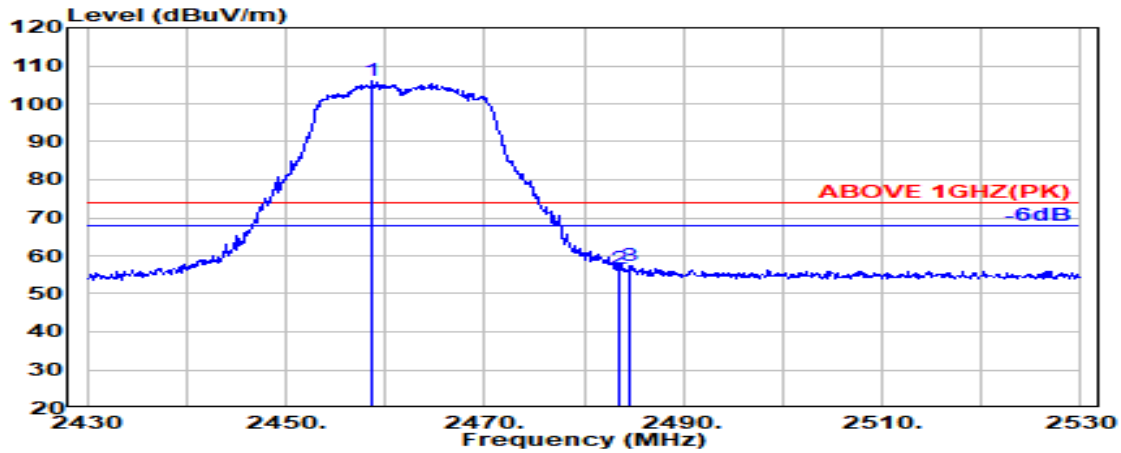

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	32.11	5.83	34.52	102.61	106.02	---	---	Peak
2483.500	32.40	5.87	34.53	53.04	56.78	74.00	17.22	Peak
2484.700	32.42	5.87	34.53	53.52	57.28	74.00	16.72	Peak

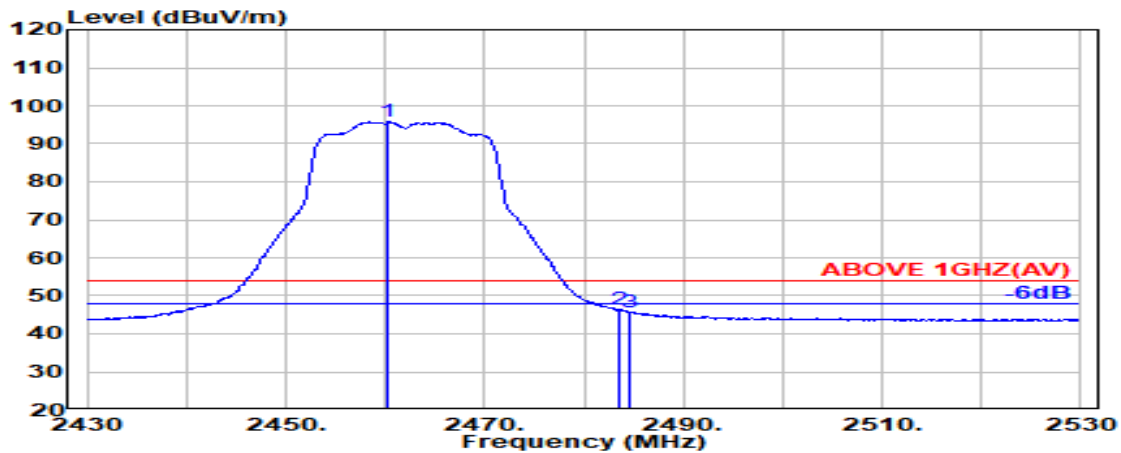

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.300	32.12	5.83	34.52	92.28	95.71	---	---	Average
2483.500	32.40	5.87	34.53	42.69	46.43	54.00	7.57	Average
2484.500	32.42	5.87	34.53	41.97	45.73	54.00	8.27	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	32.16	5.83	34.52	101.83	105.30	---	---	Peak
2483.500	32.40	5.87	34.53	52.80	56.54	74.00	17.46	Peak
2484.500	32.42	5.87	34.53	53.80	57.56	74.00	16.44	Peak

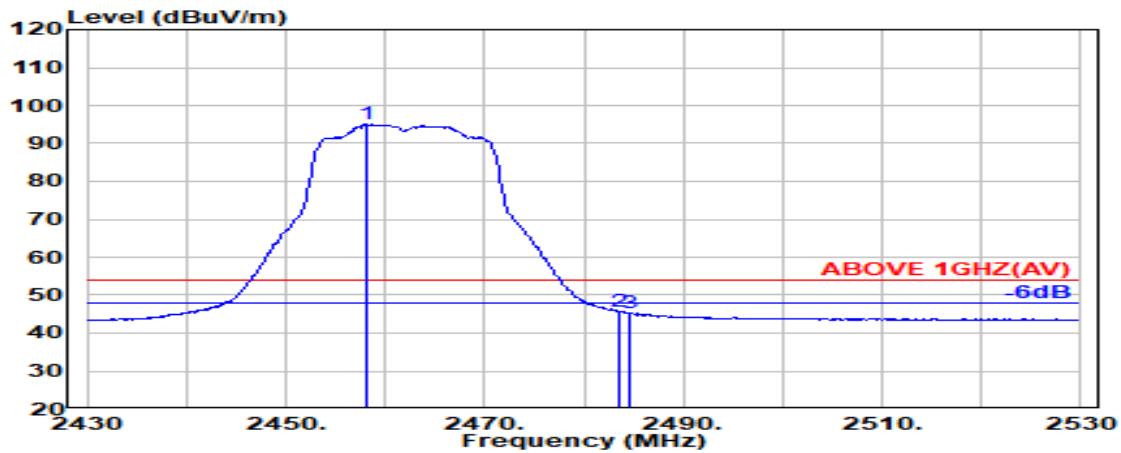


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	32.10	5.83	34.52	91.61	95.01	---	---	Average
2483.500	32.40	5.87	34.53	41.82	45.56	54.00	8.44	Average
2484.700	32.42	5.87	34.53	41.53	45.29	54.00	8.71	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

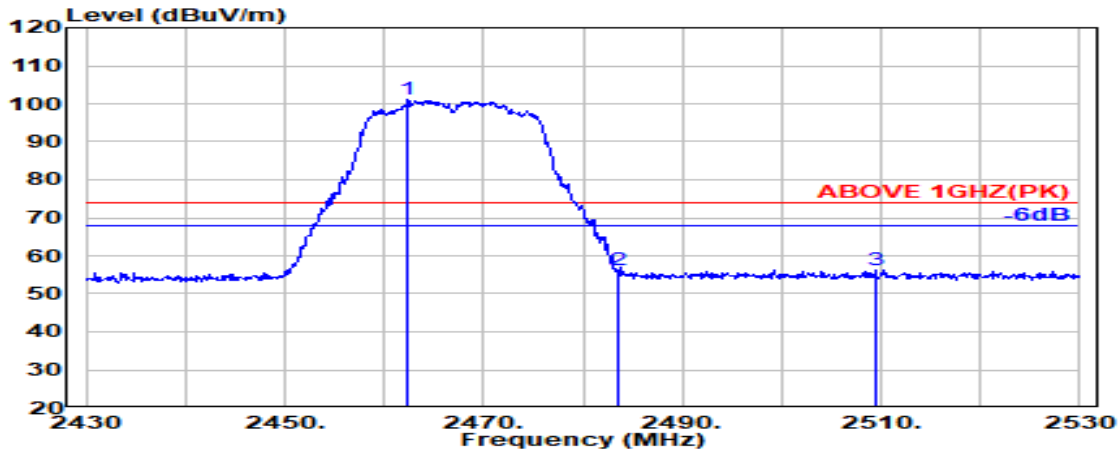

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.300	32.15	5.83	34.52	97.60	101.06	---	---	Peak
2483.500	32.40	5.87	34.53	52.30	56.04	74.00	17.96	Peak
2509.500	32.56	5.91	34.53	52.21	56.15	74.00	17.85	Peak




Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	32.18	5.84	34.52	87.59	91.09	---	---	Average
2483.500	32.40	5.87	34.53	42.01	45.75	54.00	8.25	Average
2484.400	32.41	5.87	34.53	40.38	44.13	54.00	9.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

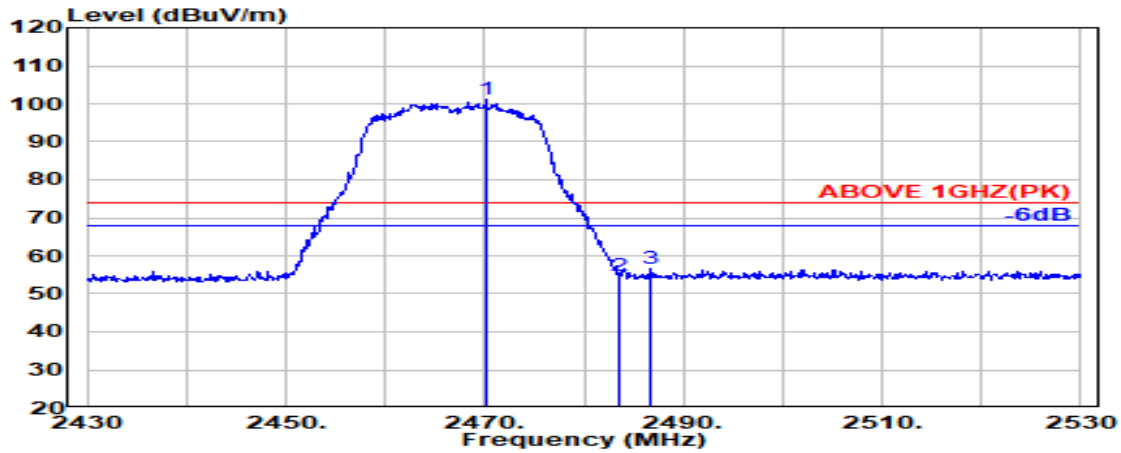

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.200	32.24	5.85	34.52	97.67	101.23	---	---	Peak
2483.500	32.40	5.87	34.53	51.06	54.80	74.00	19.20	Peak
2486.600	32.44	5.87	34.53	52.67	56.45	74.00	17.55	Peak

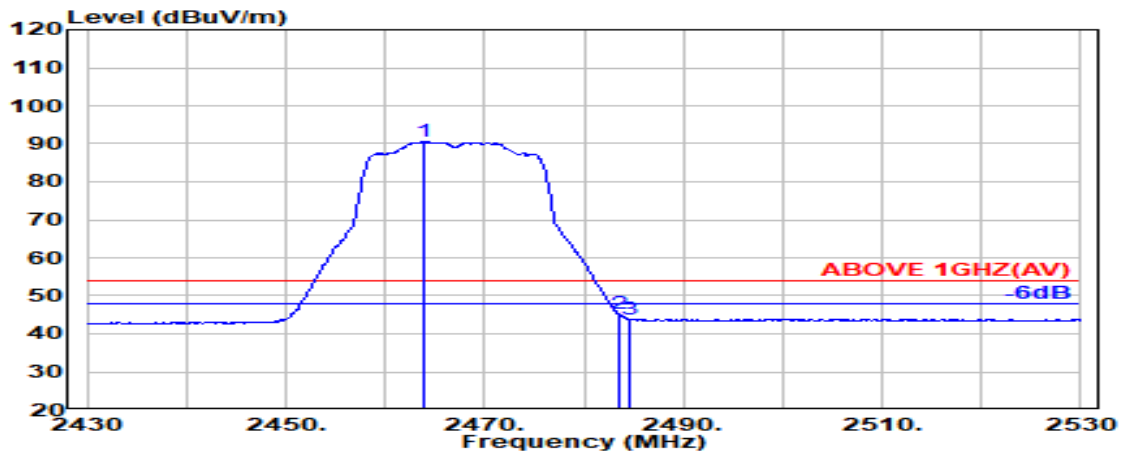


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	32.17	5.84	34.52	87.05	90.53	---	---	Average
2483.500	32.40	5.87	34.53	41.41	45.15	54.00	8.85	Average
2484.500	32.42	5.87	34.53	40.17	43.93	54.00	10.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

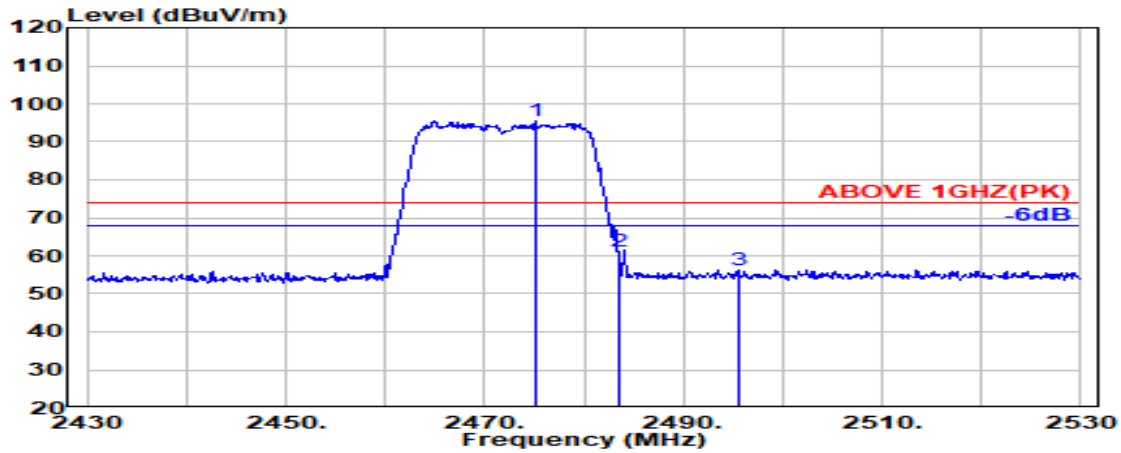

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.100	32.30	5.85	34.53	91.85	95.48	---	---	Peak
2483.500	32.40	5.87	34.53	57.57	61.31	74.00	12.69	Peak
2495.600	32.55	5.88	34.53	52.27	56.17	74.00	17.83	Peak

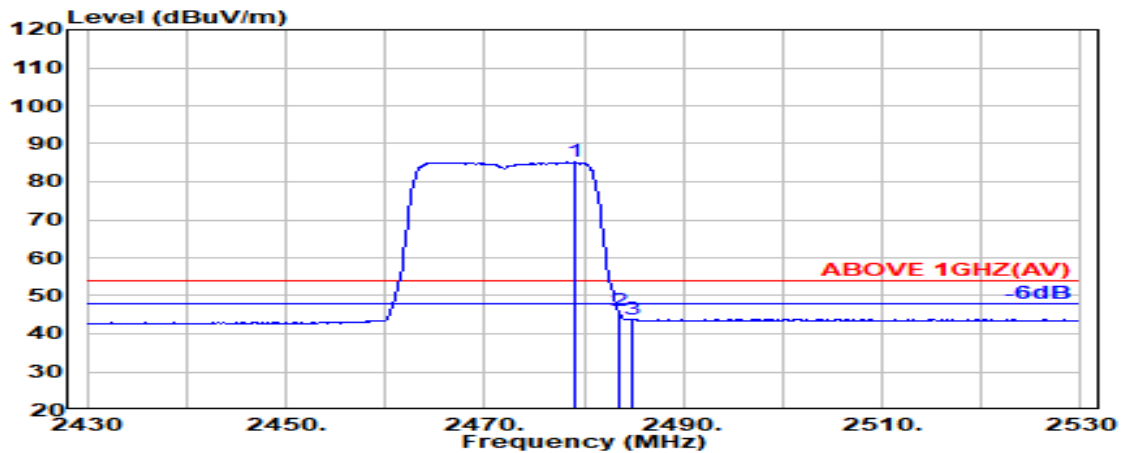


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.35	5.86	34.53	81.67	85.35	---	---	Average
2483.500	32.40	5.87	34.53	42.20	45.95	54.00	8.05	Average
2484.800	32.42	5.87	34.53	40.07	43.83	54.00	10.17	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

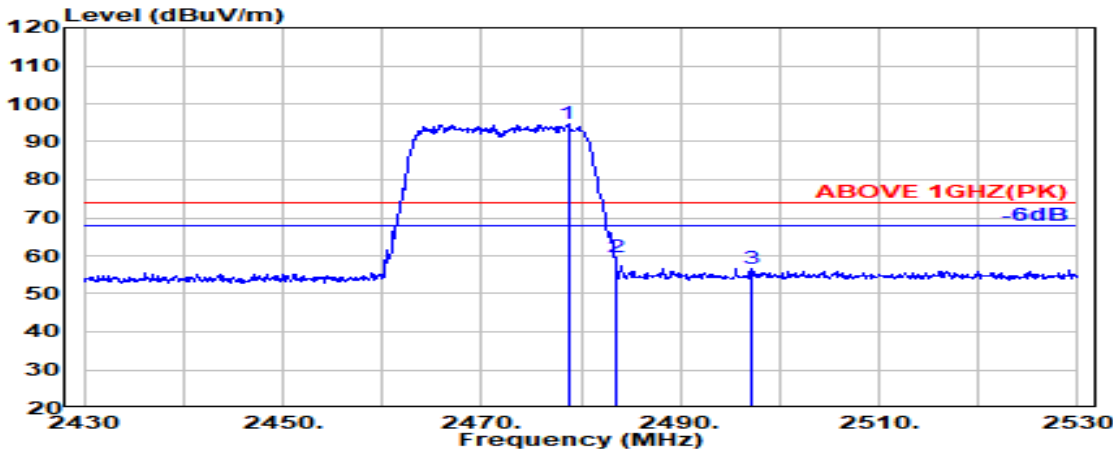

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	32.35	5.86	34.53	90.98	94.66	---	---	Peak
2483.500	32.40	5.87	34.53	55.87	59.61	74.00	14.39	Peak
2497.200	32.57	5.89	34.53	52.85	56.77	74.00	17.23	Peak




Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.700	32.33	5.86	34.53	80.81	84.47	---	---	Average
2483.500	32.40	5.87	34.53	42.02	45.76	54.00	8.24	Average
2489.000	32.47	5.87	34.53	40.03	43.85	54.00	10.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

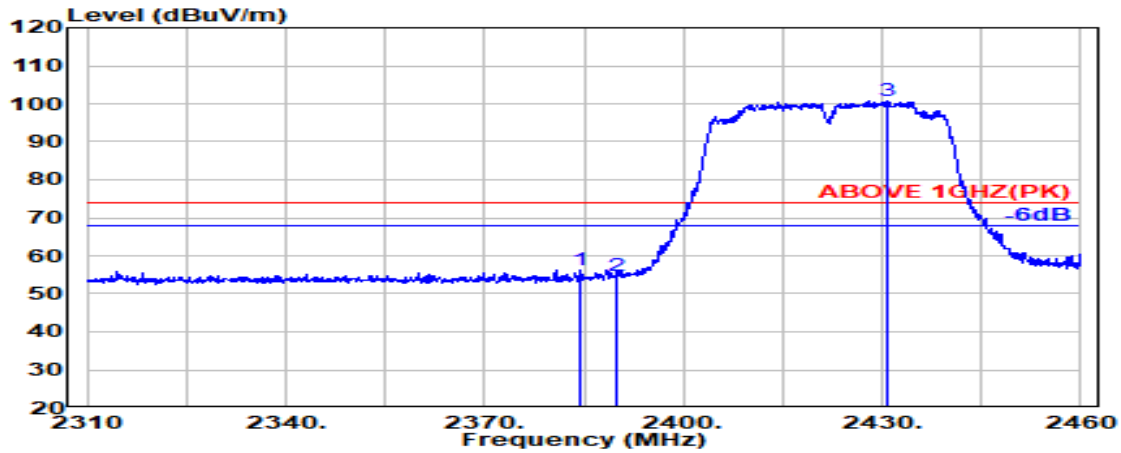

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2384.600	32.00	5.71	34.51	52.93	56.14	74.00	17.86	Peak
2390.000	32.00	5.72	34.51	51.31	54.53	74.00	19.47	Peak
@ 2430.900	32.00	5.79	34.52	97.37	100.64	---	---	Peak

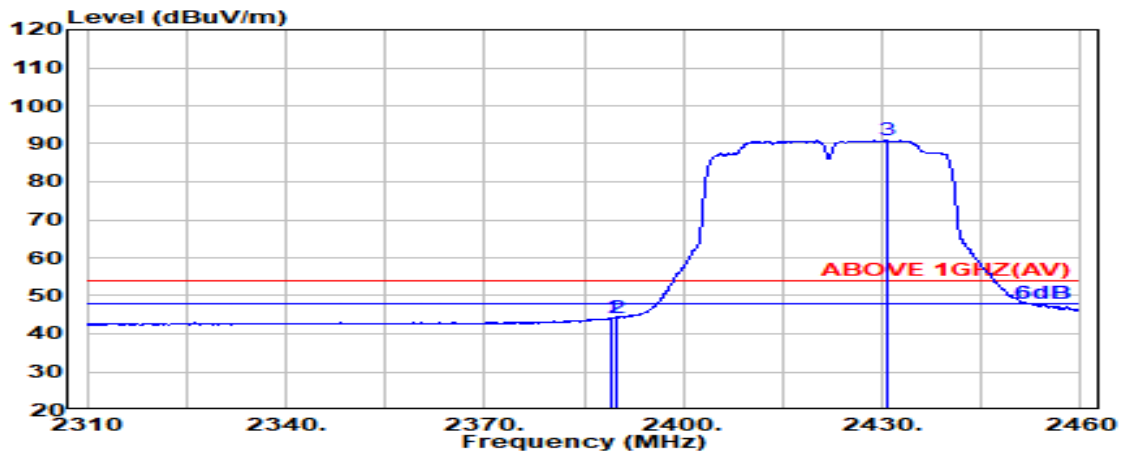


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	32.00	5.72	34.51	41.06	44.28	54.00	9.72	Average
2390.000	32.00	5.72	34.51	41.11	44.32	54.00	9.68	Average
@ 2430.700	32.00	5.79	34.52	87.60	90.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

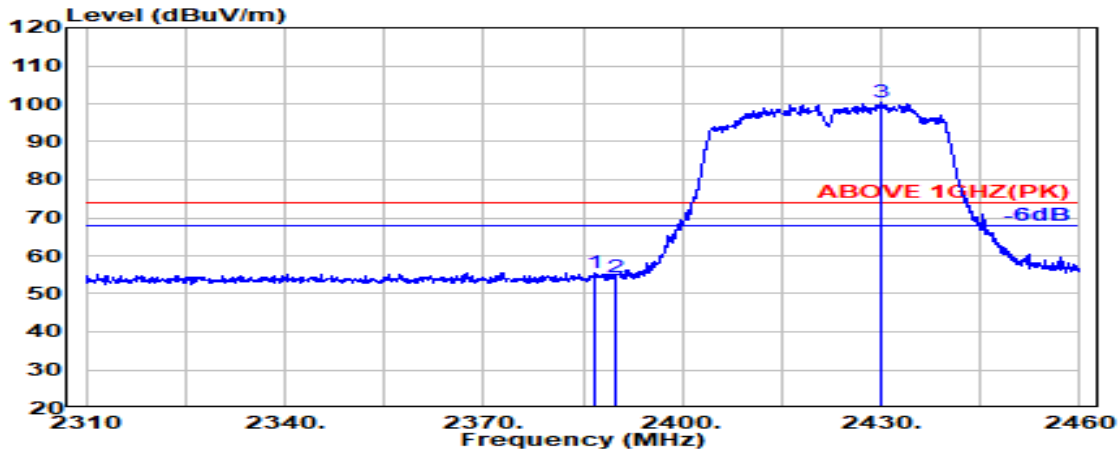

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.700	32.00	5.72	34.51	52.42	55.63	74.00	18.37	Peak
2390.000	32.00	5.72	34.51	50.95	54.16	74.00	19.84	Peak
@ 2430.100	32.00	5.78	34.52	97.05	100.32	---	---	Peak

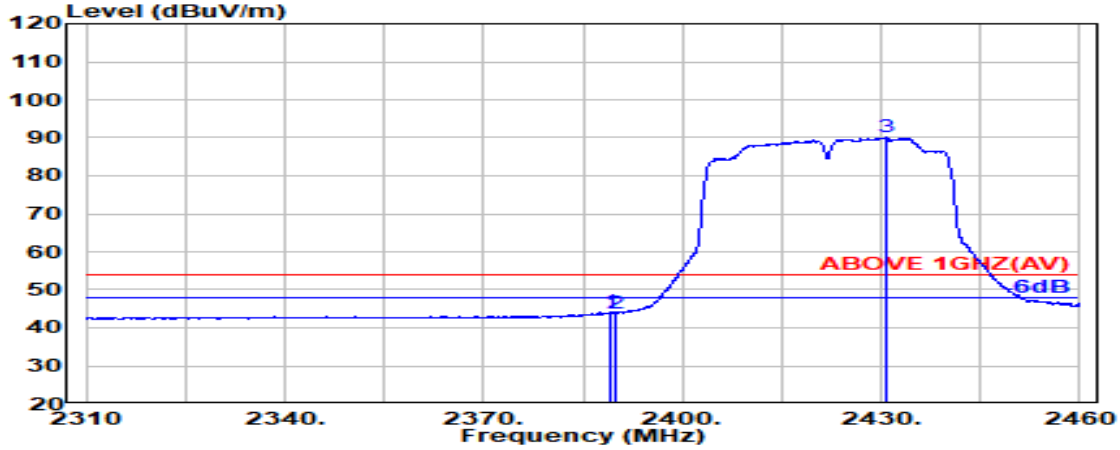


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	32.00	5.72	34.51	40.91	44.12	54.00	9.88	Average
2390.000	32.00	5.72	34.51	40.66	43.87	54.00	10.13	Average
@ 2430.800	32.00	5.79	34.52	86.73	90.00	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

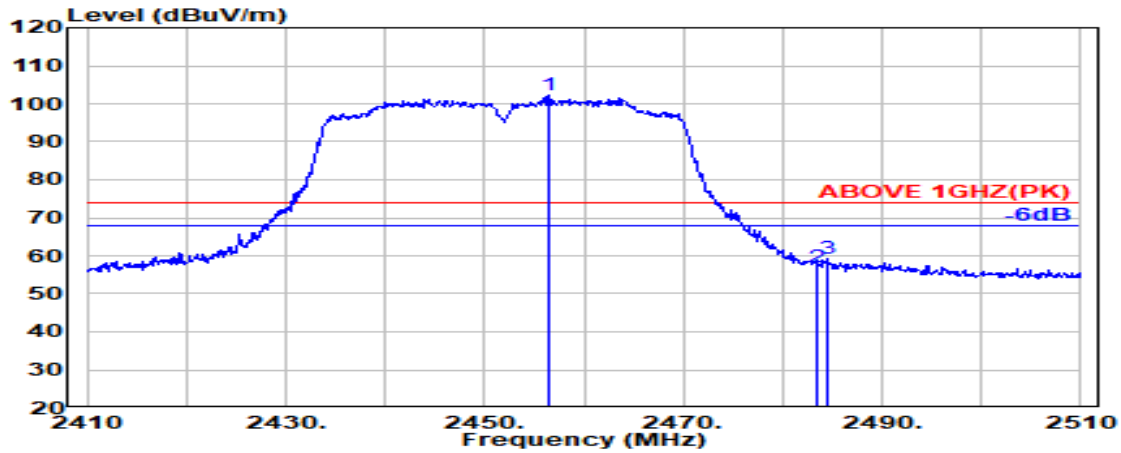

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.400	32.08	5.82	34.52	98.80	102.18	---	---	Peak
2483.500	32.40	5.87	34.53	53.18	56.92	74.00	17.08	Peak
2484.600	32.42	5.87	34.53	55.36	59.11	74.00	14.89	Peak

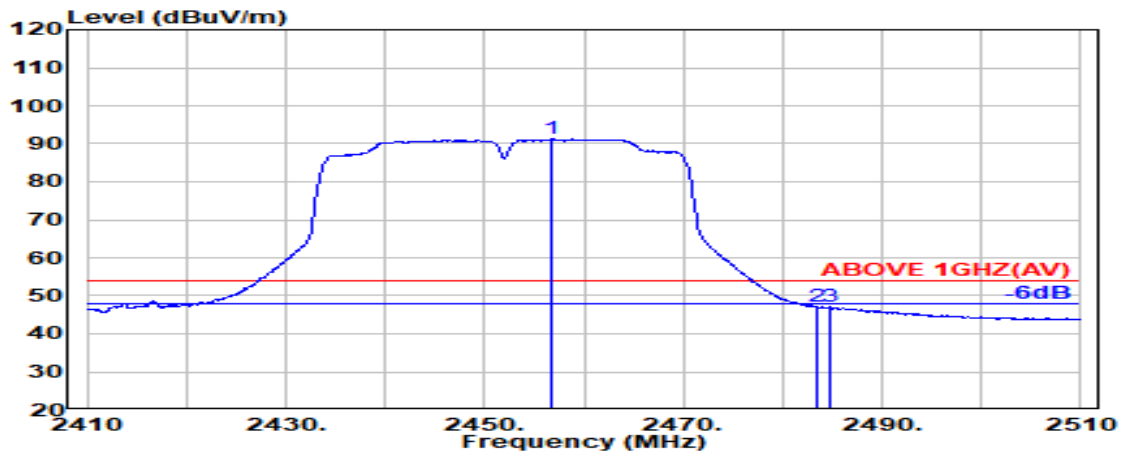


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.800	32.08	5.83	34.52	87.90	91.28	---	---	Average
2483.500	32.40	5.87	34.53	43.30	47.05	54.00	6.95	Average
2484.800	32.42	5.87	34.53	43.26	47.02	54.00	6.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

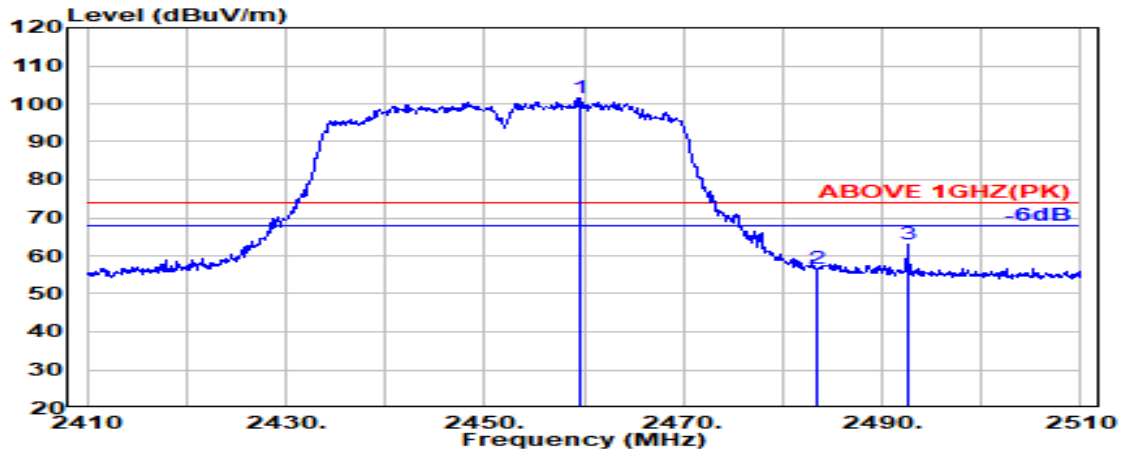

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	32.11	5.83	34.52	98.28	101.70	---	---	Peak
2483.500	32.40	5.87	34.53	52.79	56.53	74.00	17.47	Peak
2492.500	32.51	5.88	34.53	58.98	62.84	74.00	11.16	Peak

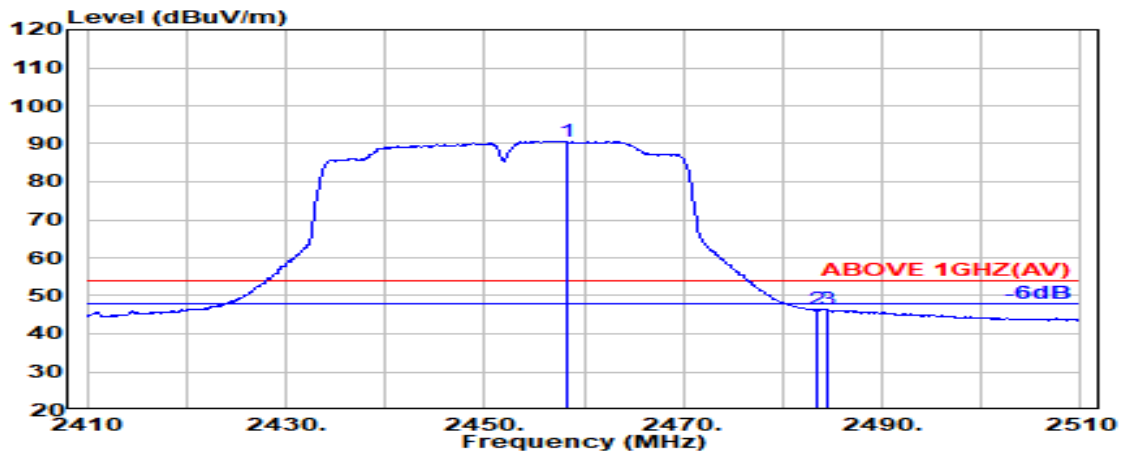


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	32.10	5.83	34.52	87.32	90.72	---	---	Average
2483.500	32.40	5.87	34.53	42.54	46.28	54.00	7.72	Average
2484.600	32.42	5.87	34.53	42.54	46.30	54.00	7.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

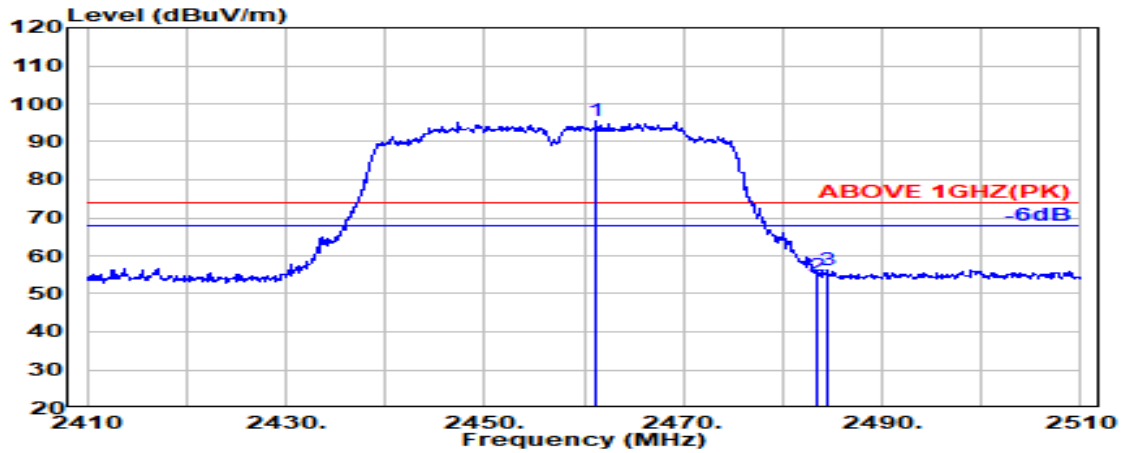

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	32.14	5.83	34.52	92.02	95.46	---	---	Peak
2483.500	32.40	5.87	34.53	50.98	54.73	74.00	19.27	Peak
2484.400	32.41	5.87	34.53	52.50	56.26	74.00	17.74	Peak

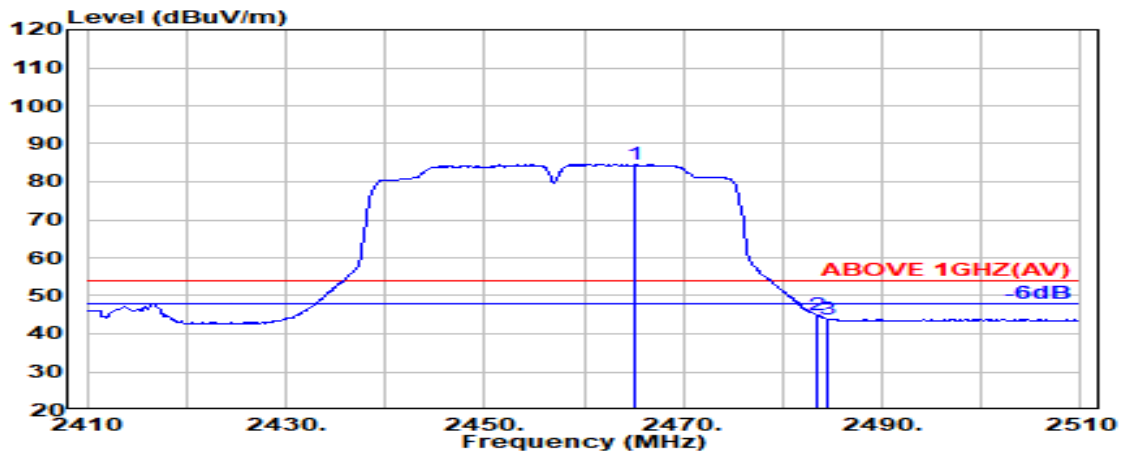


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	32.18	5.84	34.52	81.03	84.52	---	---	Average
2483.500	32.40	5.87	34.53	41.10	44.84	54.00	9.16	Average
2484.400	32.41	5.87	34.53	40.19	43.95	54.00	10.05	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

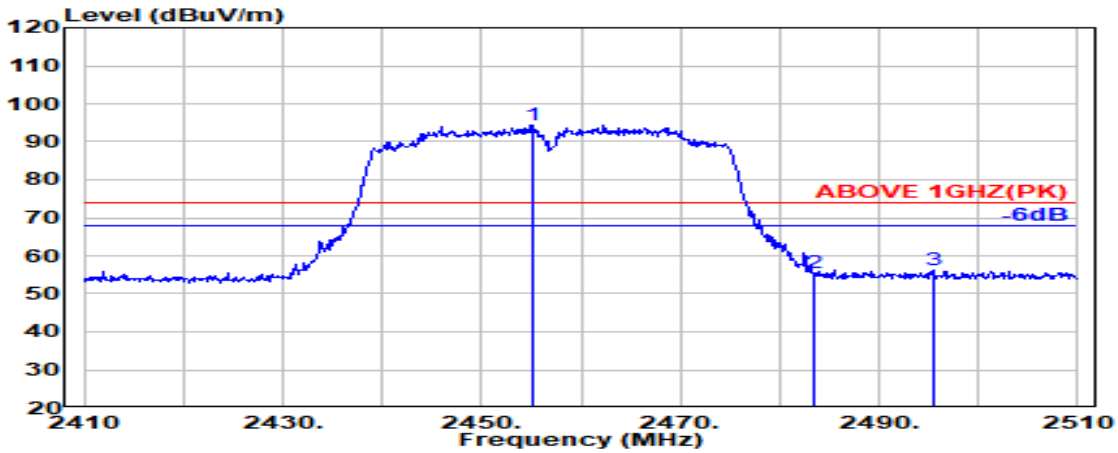

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.100	32.06	5.82	34.52	90.91	94.27	---	---	Peak
2483.500	32.40	5.87	34.53	51.73	55.48	74.00	18.52	Peak
2495.600	32.55	5.88	34.53	52.37	56.27	74.00	17.73	Peak

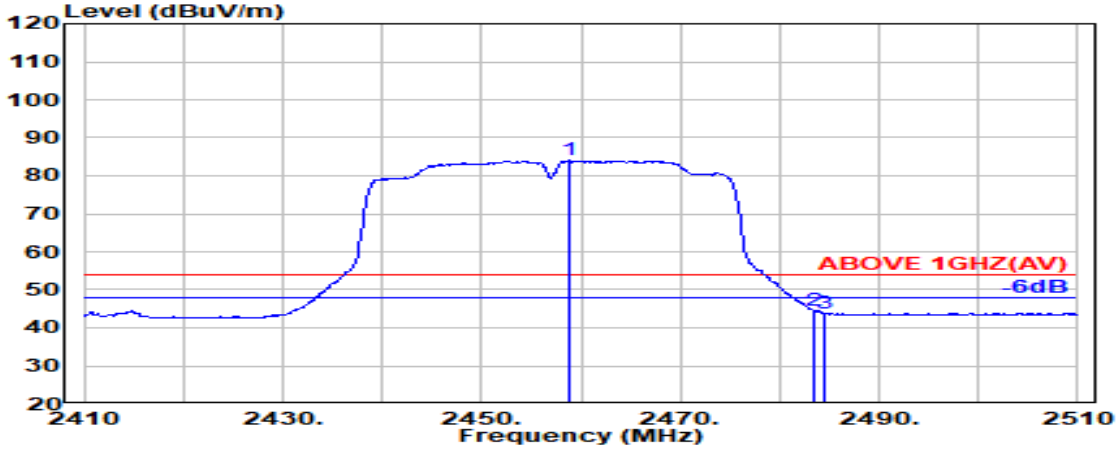


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	32.11	5.83	34.52	80.71	84.13	---	---	Average
2483.500	32.40	5.87	34.53	40.92	44.66	54.00	9.34	Average
2484.400	32.41	5.87	34.53	40.09	43.84	54.00	10.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

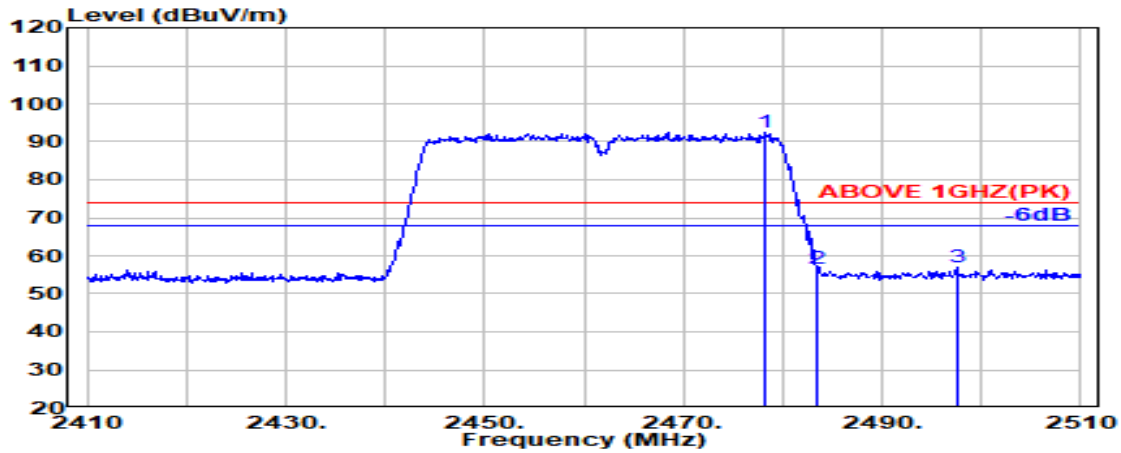

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	32.34	5.86	34.53	88.81	92.48	---	---	Peak
2483.500	32.40	5.87	34.53	52.94	56.69	74.00	17.31	Peak
2497.500	32.57	5.89	34.53	52.95	56.87	74.00	17.13	Peak

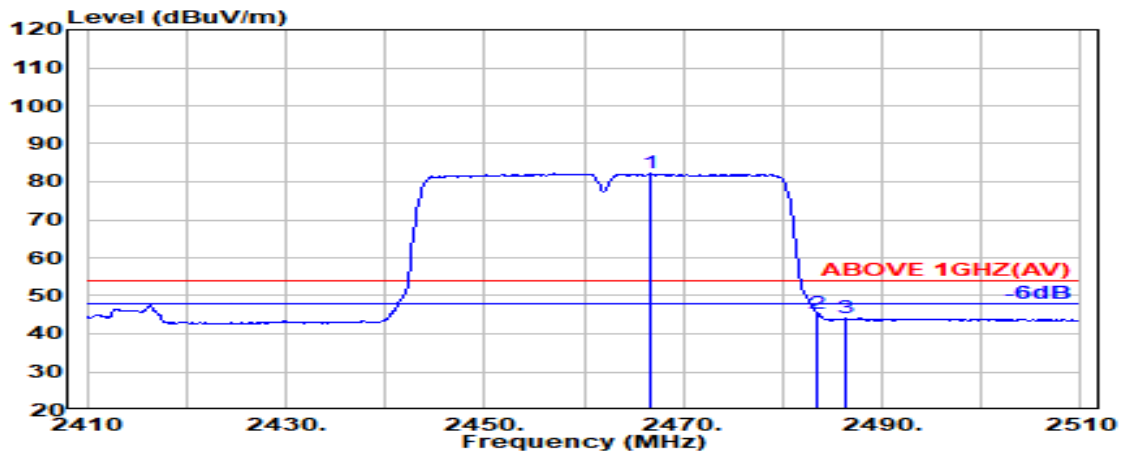


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.700	32.20	5.84	34.52	78.68	82.19	---	---	Average
2483.500	32.40	5.87	34.53	41.52	45.26	54.00	8.74	Average
2486.300	32.44	5.87	34.53	40.30	44.08	54.00	9.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

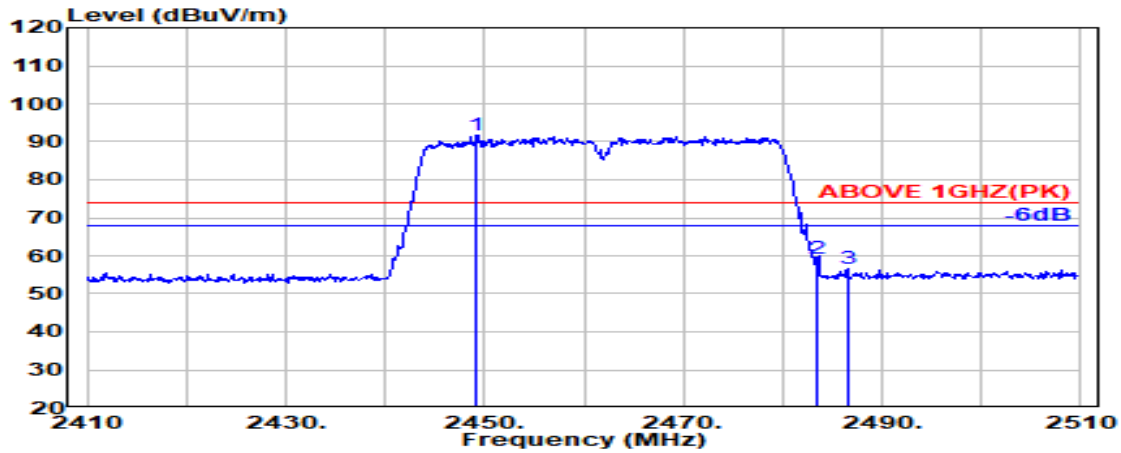

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.200	32.00	5.81	34.52	88.47	91.77	---	---	Peak
2483.500	32.40	5.87	34.53	55.63	59.37	74.00	14.63	Peak
2486.500	32.44	5.87	34.53	52.68	56.46	74.00	17.54	Peak

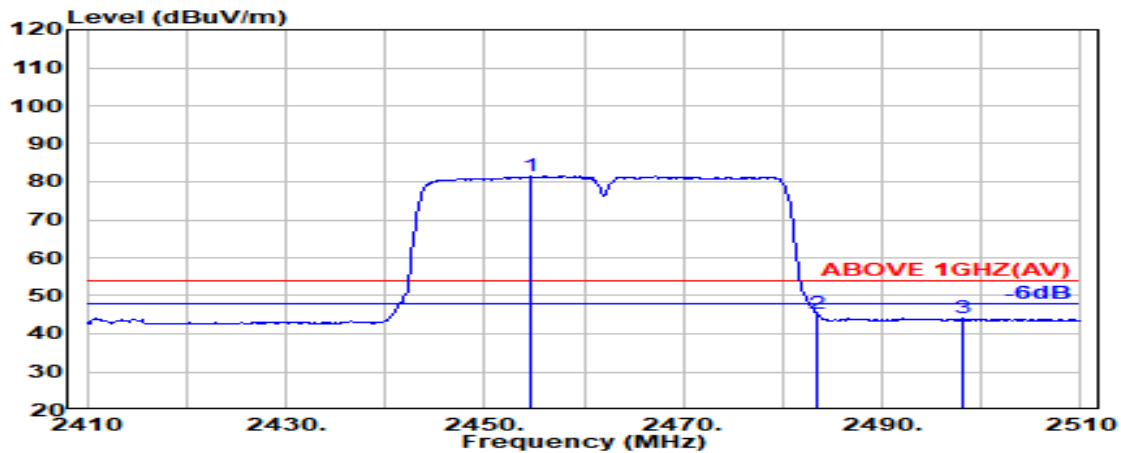


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.600	32.06	5.82	34.52	78.12	81.48	---	---	Average
2483.500	32.40	5.87	34.53	41.41	45.15	54.00	8.85	Average
2498.200	32.58	5.89	34.53	40.10	44.04	54.00	9.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

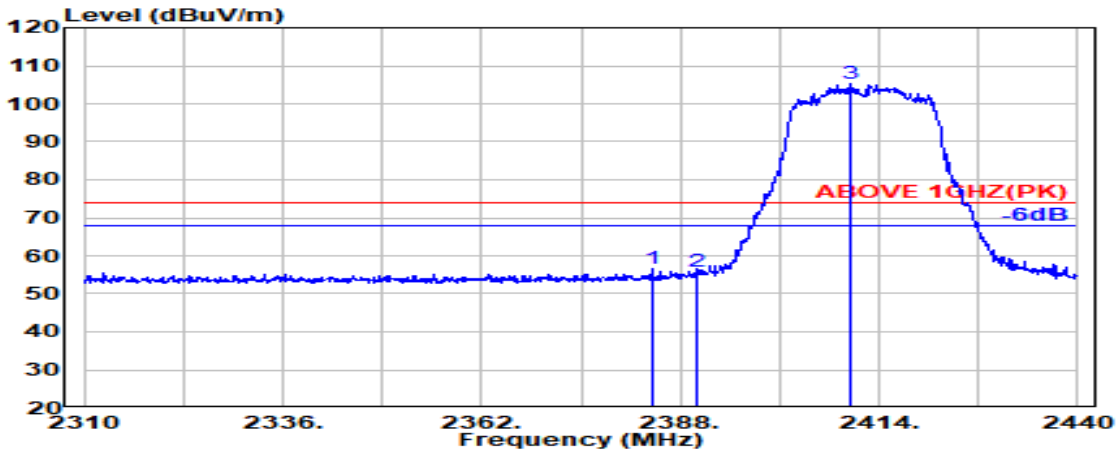

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.300	32.00	5.71	34.51	53.27	56.48	74.00	17.52	Peak
2390.000	32.00	5.72	34.51	52.63	55.84	74.00	18.16	Peak
@ 2410.200	32.00	5.75	34.51	101.97	105.21	---	---	Peak

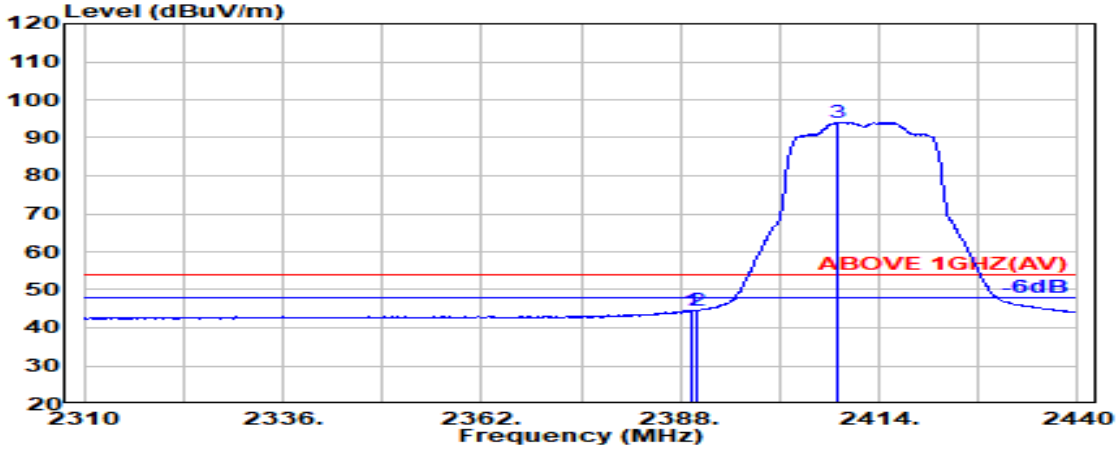


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	41.32	44.54	54.00	9.46	Average
2390.000	32.00	5.72	34.51	41.43	44.64	54.00	9.36	Average
@ 2408.700	32.00	5.75	34.51	90.86	94.10	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

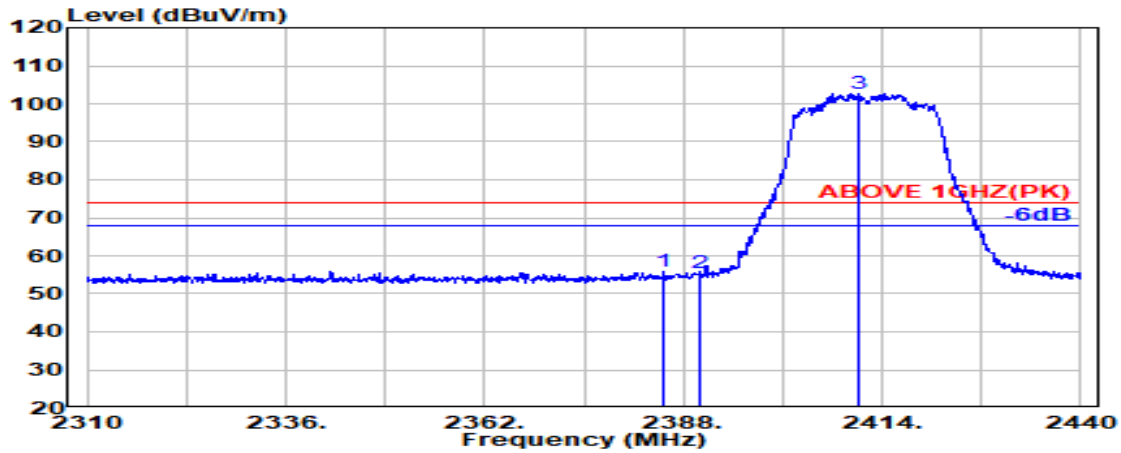

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.500	32.00	5.72	34.51	52.80	56.01	74.00	17.99	Peak
2390.000	32.00	5.72	34.51	52.30	55.52	74.00	18.48	Peak
@ 2410.800	32.00	5.75	34.51	99.33	102.57	---	---	Peak

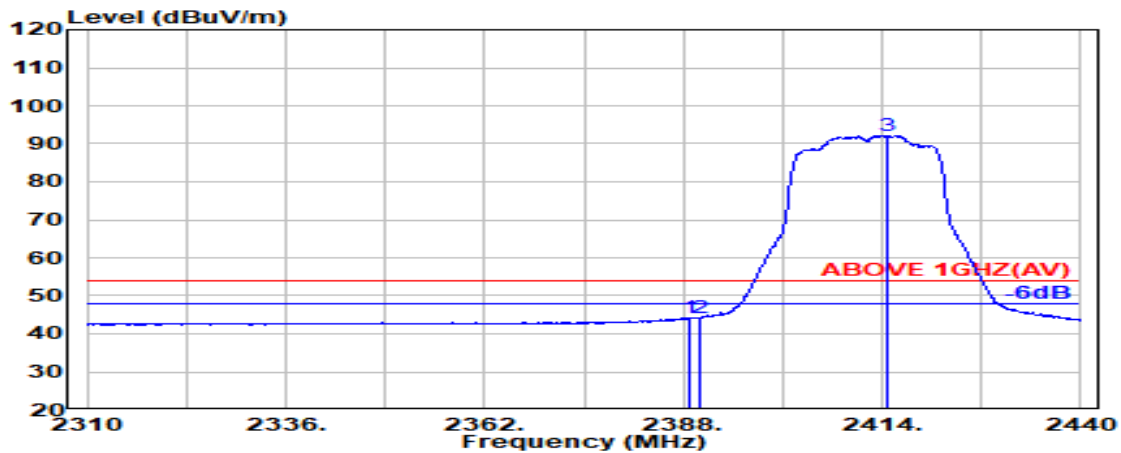


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	32.00	5.72	34.51	41.06	44.27	54.00	9.73	Average
2390.000	32.00	5.72	34.51	41.05	44.26	54.00	9.74	Average
@ 2414.700	32.00	5.76	34.51	88.82	92.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

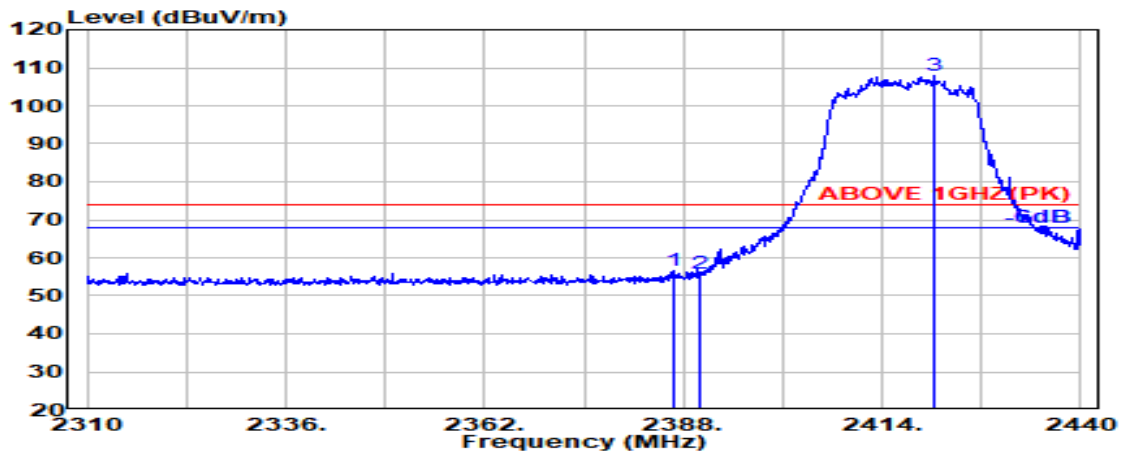

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.600	32.00	5.72	34.51	53.23	56.44	74.00	17.56	Peak
2390.000	32.00	5.72	34.51	52.49	55.71	74.00	18.29	Peak
@ 2420.800	32.00	5.77	34.51	104.62	107.87	---	---	Peak

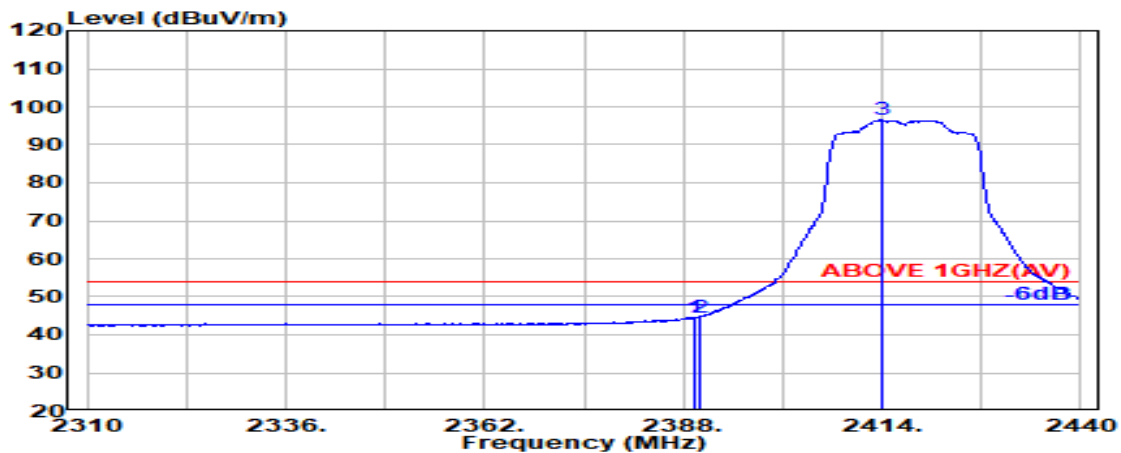


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	41.41	44.62	54.00	9.38	Average
2390.000	32.00	5.72	34.51	41.47	44.68	54.00	9.32	Average
@ 2413.900	32.00	5.76	34.51	93.21	96.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

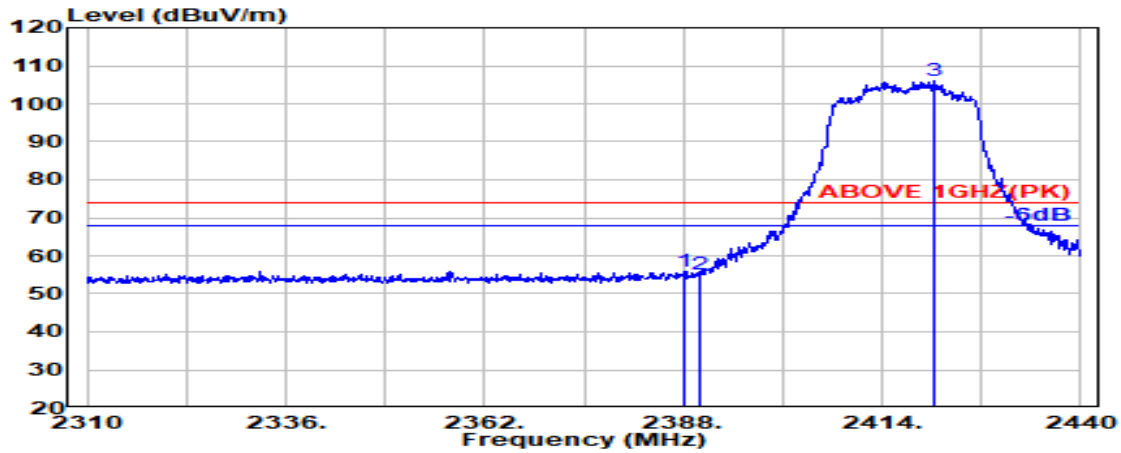

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	32.00	5.72	34.51	52.82	56.04	74.00	17.96	Peak
2390.000	32.00	5.72	34.51	51.88	55.10	74.00	18.90	Peak
@ 2420.700	32.00	5.77	34.51	102.81	106.06	---	---	Peak

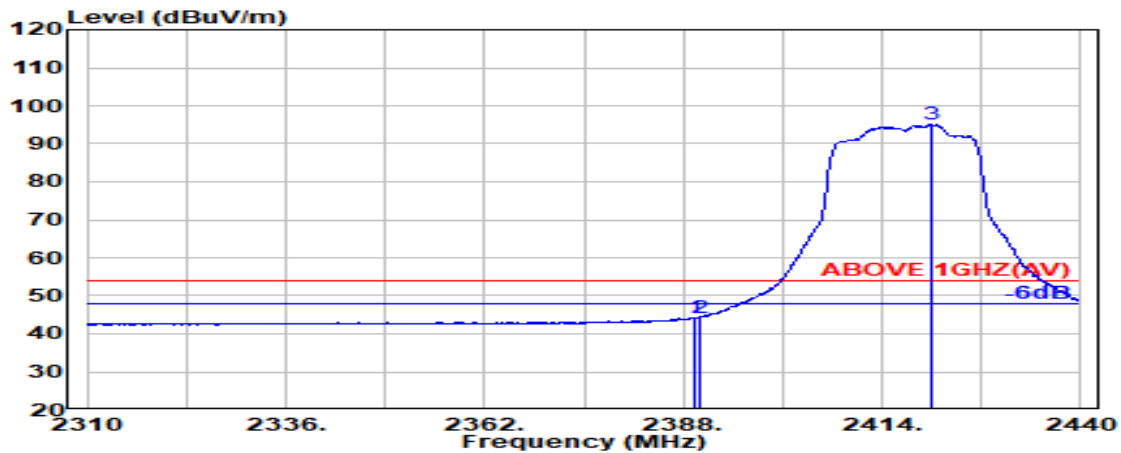


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	32.00	5.72	34.51	40.93	44.15	54.00	9.85	Average
2390.000	32.00	5.72	34.51	40.97	44.18	54.00	9.82	Average
@ 2420.500	32.00	5.77	34.51	91.91	95.16	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

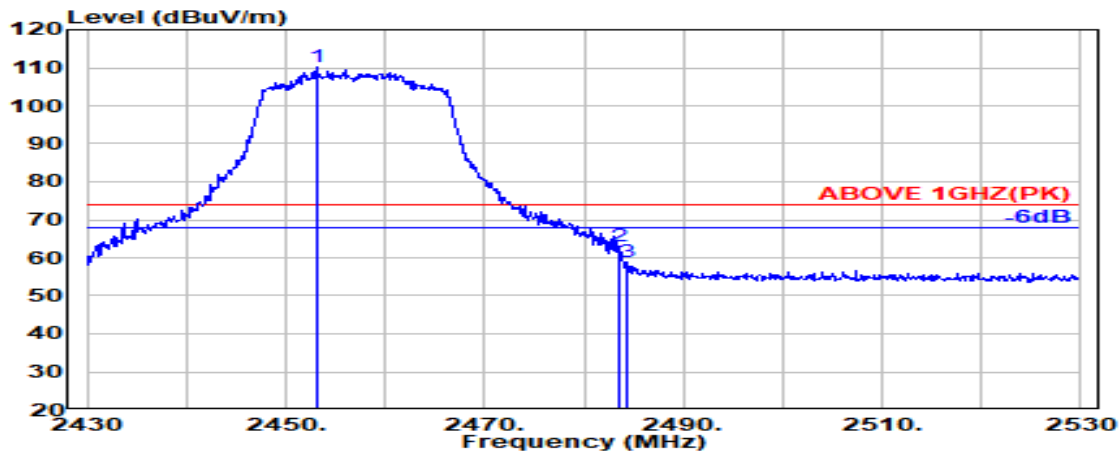

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.100	32.04	5.82	34.52	106.88	110.21	---	---	Peak
2483.500	32.40	5.87	34.53	59.33	63.07	74.00	10.93	Peak
2484.400	32.41	5.87	34.53	55.22	58.97	74.00	15.03	Peak

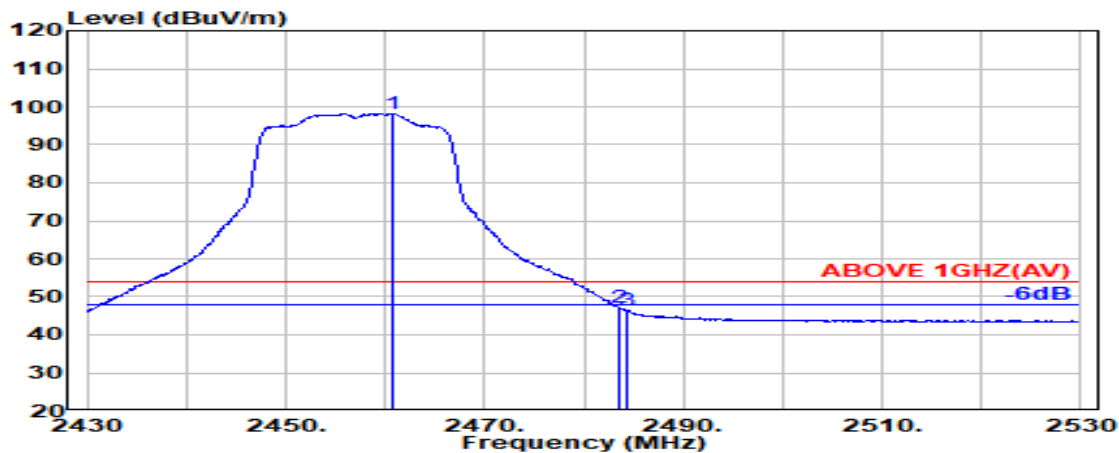


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	32.13	5.83	34.52	94.81	98.25	---	---	Average
2483.500	32.40	5.87	34.53	43.54	47.28	54.00	6.72	Average
2484.400	32.41	5.87	34.53	42.64	46.39	54.00	7.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

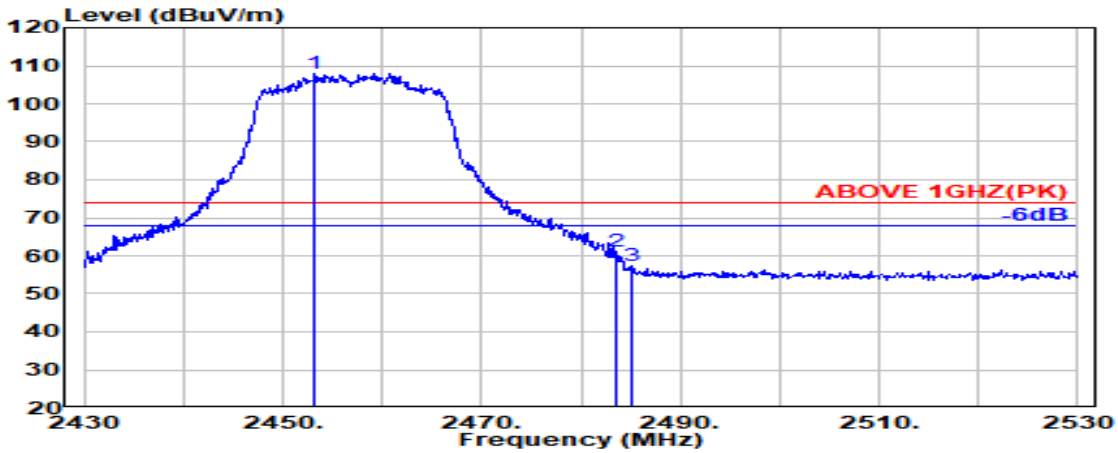

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.200	32.04	5.82	34.52	104.77	108.11	---	---	Peak
2483.500	32.40	5.87	34.53	57.41	61.15	74.00	12.85	Peak
2485.200	32.42	5.87	34.53	53.44	57.20	74.00	16.80	Peak

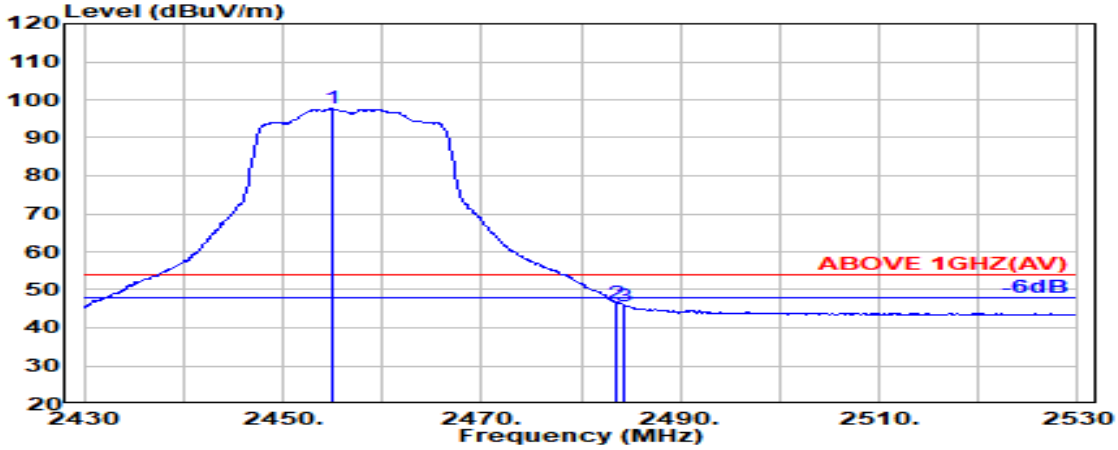

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.900	32.06	5.82	34.52	94.29	97.65	---	---	Average
2483.500	32.40	5.87	34.53	42.75	46.49	54.00	7.51	Average
2484.400	32.41	5.87	34.53	41.99	45.75	54.00	8.25	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	32.12	5.83	34.52	102.79	106.22	---	---	Peak
2483.500	32.40	5.87	34.53	54.02	57.76	74.00	16.24	Peak
2485.500	32.43	5.87	34.53	53.83	57.60	74.00	16.40	Peak

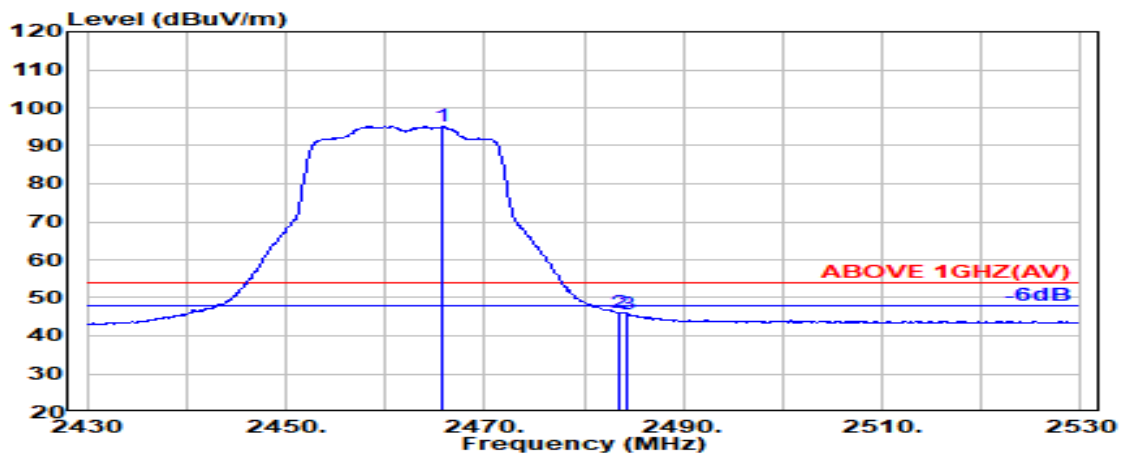


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	32.19	5.84	34.52	91.62	95.12	---	---	Average
2483.500	32.40	5.87	34.53	42.42	46.16	54.00	7.84	Average
2484.400	32.41	5.87	34.53	42.04	45.79	54.00	8.21	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

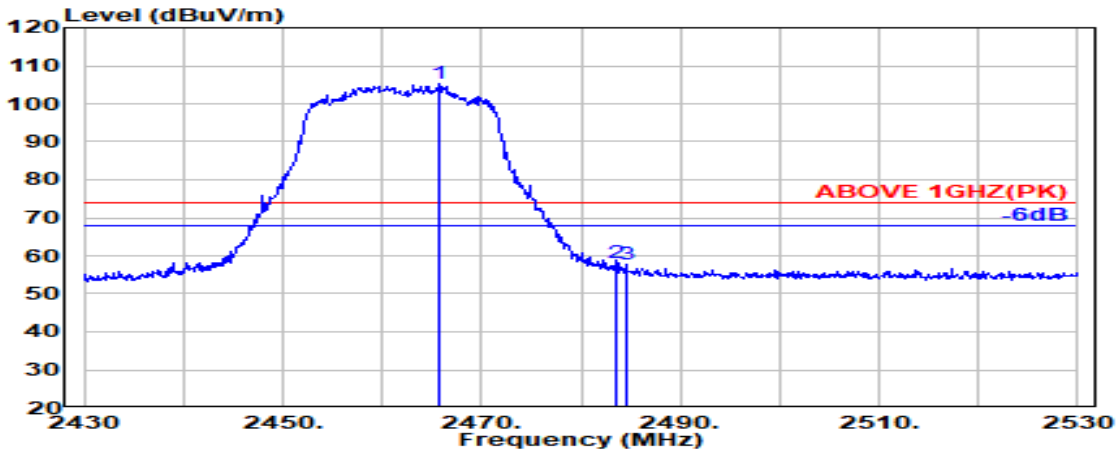

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	32.19	5.84	34.52	101.85	105.35	---	---	Peak
2483.500	32.40	5.87	34.53	54.40	58.15	74.00	15.85	Peak
2484.600	32.42	5.87	34.53	53.79	57.55	74.00	16.45	Peak




Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	32.12	5.83	34.52	91.03	94.46	---	---	Average
2483.500	32.40	5.87	34.53	42.12	45.86	54.00	8.14	Average
2484.400	32.41	5.87	34.53	42.04	45.79	54.00	8.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

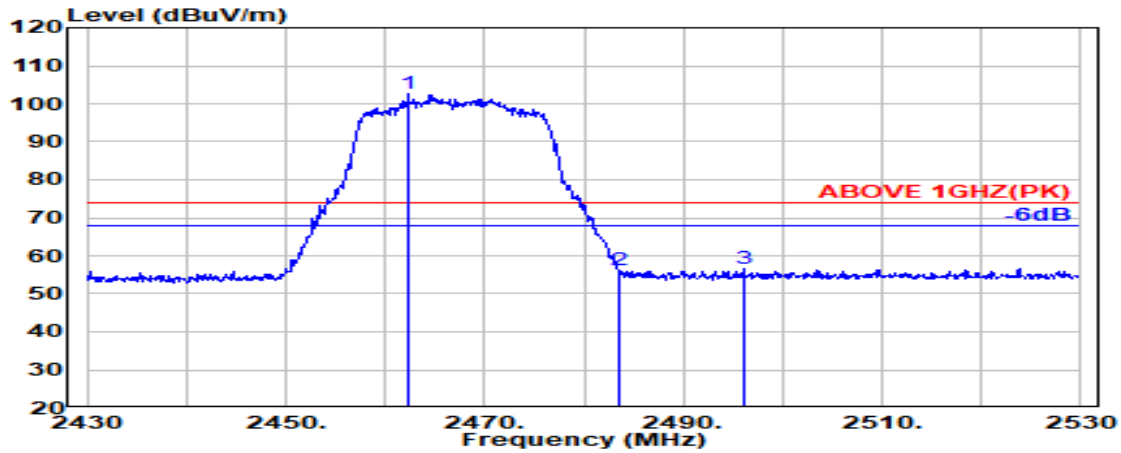

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.300	32.15	5.83	34.52	99.26	102.72	---	---	Peak
2483.500	32.40	5.87	34.53	52.31	56.05	74.00	17.95	Peak
2496.100	32.55	5.88	34.53	52.77	56.68	74.00	17.32	Peak

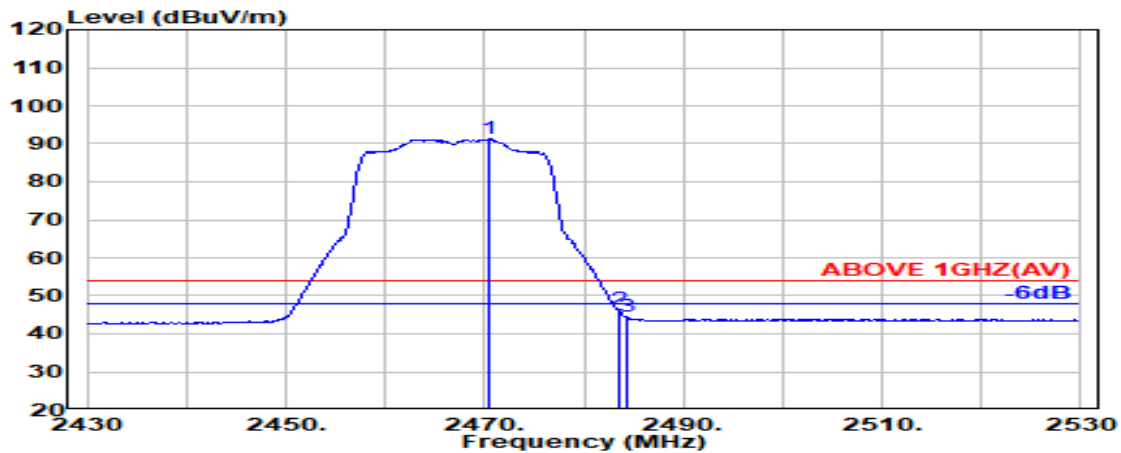


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.400	32.25	5.85	34.52	87.60	91.16	---	---	Average
2483.500	32.40	5.87	34.53	42.49	46.23	54.00	7.77	Average
2484.400	32.41	5.87	34.53	40.61	44.37	54.00	9.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

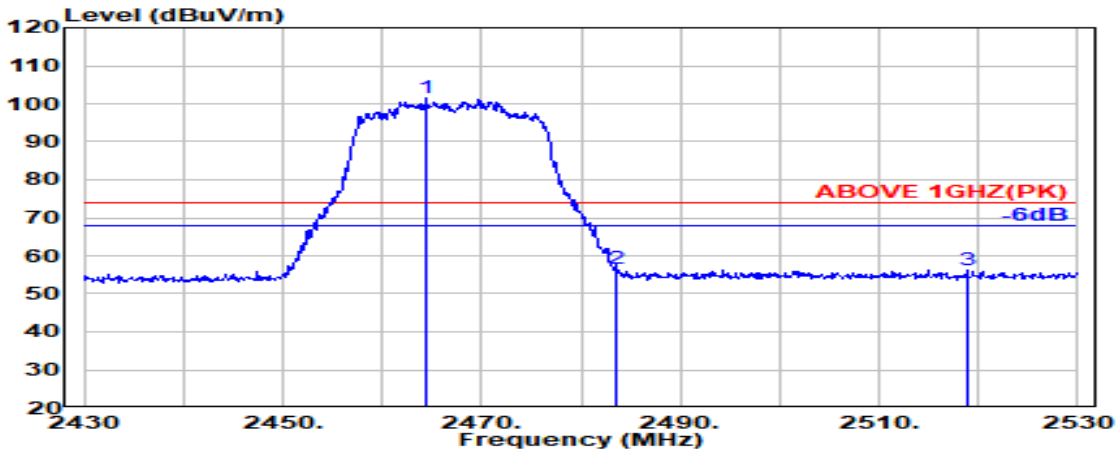

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	32.17	5.84	34.52	97.92	101.41	---	---	Peak
2483.500	32.40	5.87	34.53	52.81	56.55	74.00	17.45	Peak
2518.800	32.52	5.94	34.53	52.40	56.32	74.00	17.68	Peak

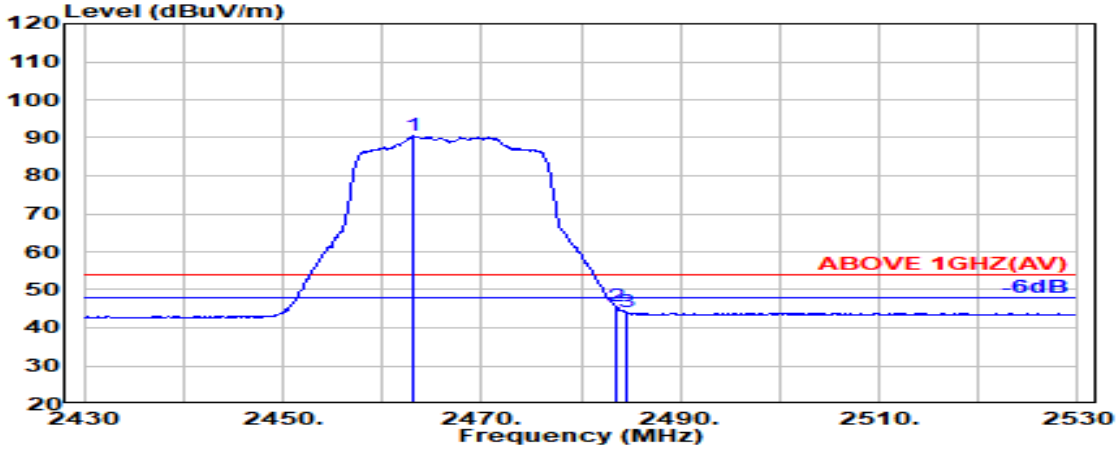


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.200	32.16	5.83	34.52	86.98	90.45	---	---	Average
2483.500	32.40	5.87	34.53	42.09	45.84	54.00	8.16	Average
2484.600	32.42	5.87	34.53	40.29	44.05	54.00	9.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

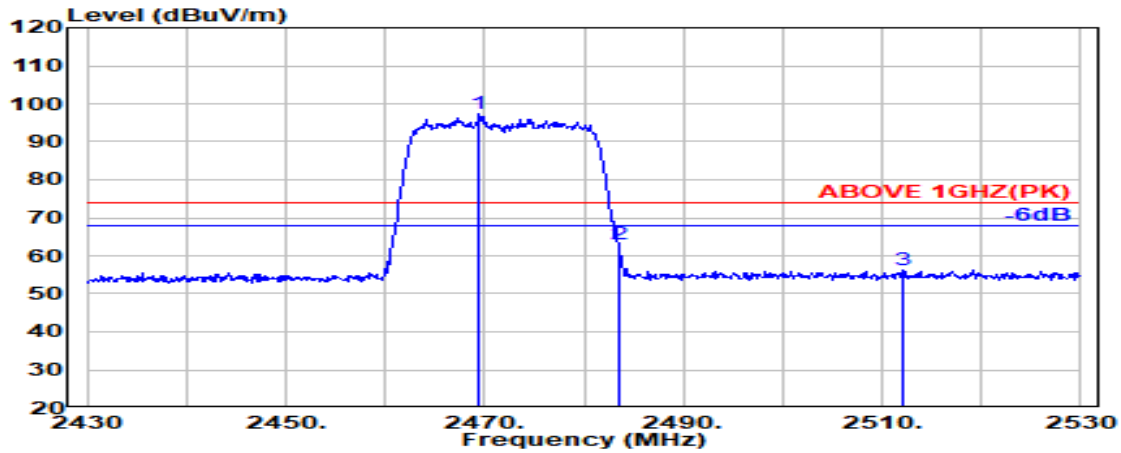

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	32.24	5.84	34.52	93.75	97.30	---	---	Peak
2483.500	32.40	5.87	34.53	59.45	63.19	74.00	10.81	Peak
2512.200	32.55	5.92	34.53	52.47	56.41	74.00	17.59	Peak



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	32.32	5.85	34.53	81.15	84.80	---	---	Average
2483.500	32.40	5.87	34.53	42.70	46.44	54.00	7.56	Average
2491.900	32.50	5.88	34.53	40.19	44.05	54.00	9.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	32.18	5.84	34.52	92.02	95.52	---	---	Peak
2483.500	32.40	5.87	34.53	57.06	60.80	74.00	13.20	Peak
2506.800	32.57	5.91	34.53	52.55	56.50	74.00	17.50	Peak

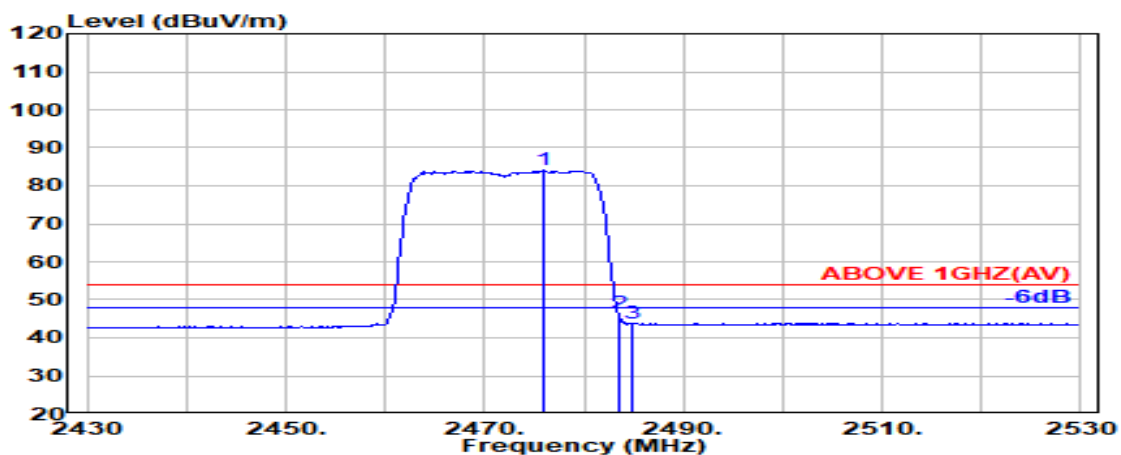


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	32.31	5.85	34.53	80.50	84.14	---	---	Average
2483.500	32.40	5.87	34.53	42.65	46.39	54.00	7.61	Average
2484.800	32.42	5.87	34.53	40.03	43.79	54.00	10.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

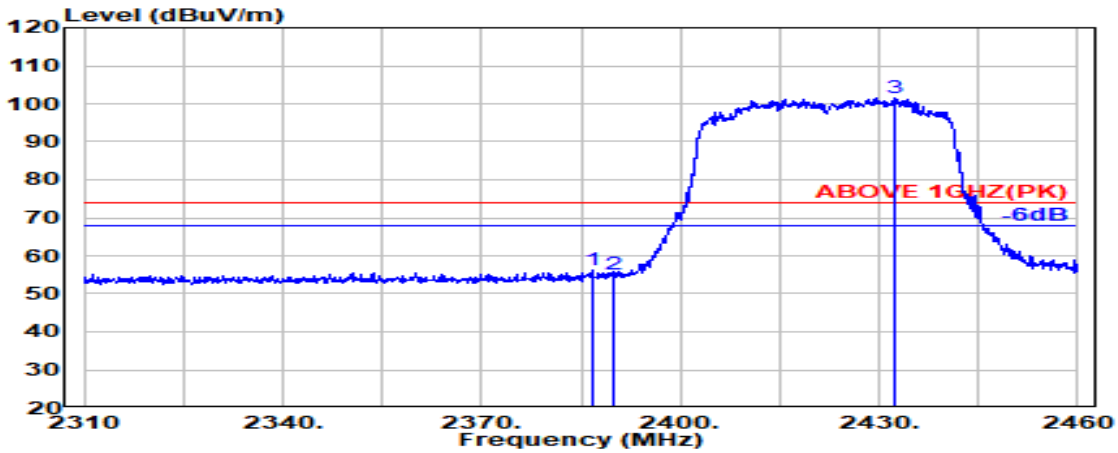

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.600	32.00	5.72	34.51	53.03	56.24	74.00	17.76	Peak
2390.000	32.00	5.72	34.51	52.04	55.25	74.00	18.75	Peak
@ 2432.300	32.00	5.79	34.52	98.16	101.43	---	---	Peak

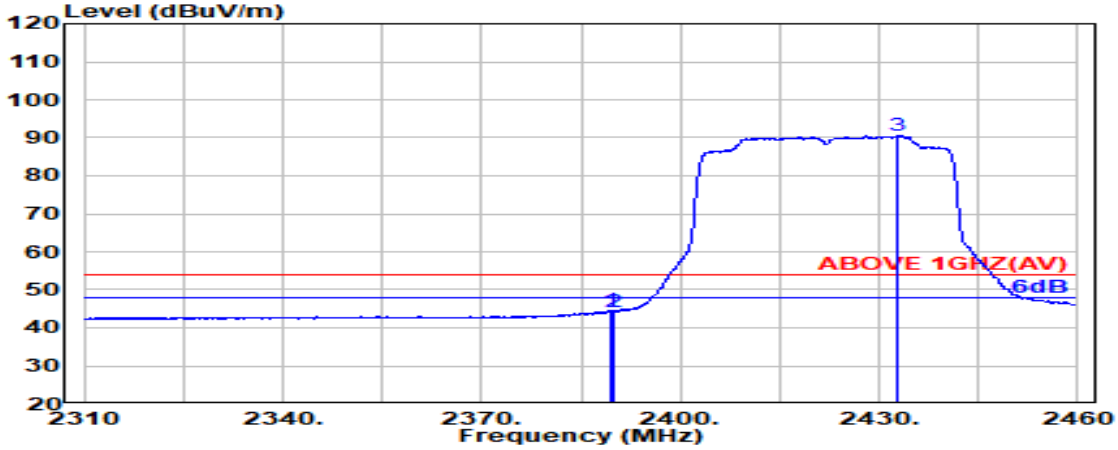


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	32.00	5.72	34.51	41.28	44.50	54.00	9.50	Average
2390.000	32.00	5.72	34.51	40.98	44.19	54.00	9.81	Average
@ 2432.900	32.00	5.79	34.52	87.28	90.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

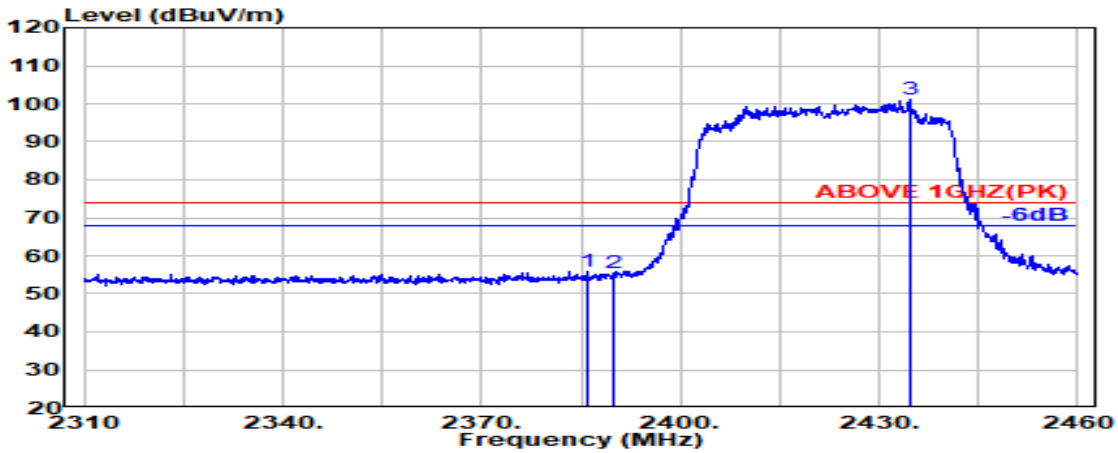

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.000	32.00	5.72	34.51	52.73	55.94	74.00	18.06	Peak
2390.000	32.00	5.72	34.51	52.17	55.38	74.00	18.62	Peak
@ 2434.600	32.00	5.79	34.52	97.91	101.19	---	---	Peak

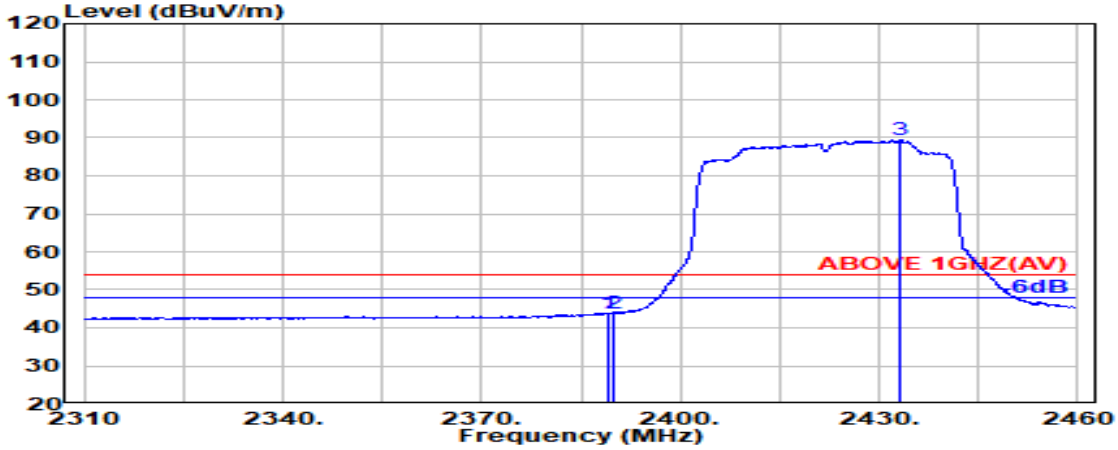


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	32.00	5.72	34.51	40.69	43.90	54.00	10.10	Average
2390.000	32.00	5.72	34.51	40.74	43.95	54.00	10.05	Average
@ 2433.200	32.00	5.79	34.52	86.07	89.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

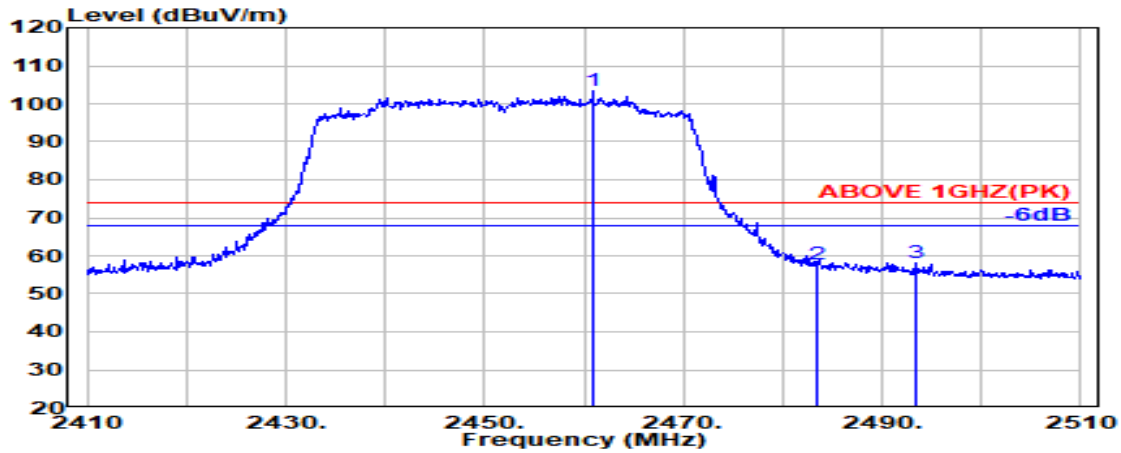

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.900	32.13	5.83	34.52	100.12	103.56	---	---	Peak
2483.500	32.40	5.87	34.53	53.81	57.55	74.00	16.45	Peak
2493.300	32.52	5.88	34.53	54.38	58.25	74.00	15.75	Peak

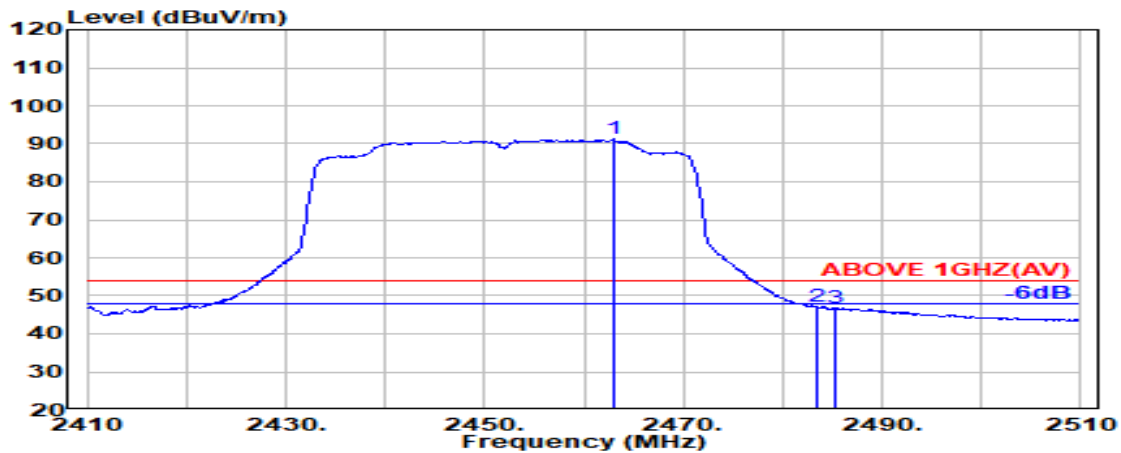


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	32.16	5.83	34.52	87.67	91.14	---	---	Average
2483.500	32.40	5.87	34.53	43.43	47.17	54.00	6.83	Average
2485.200	32.42	5.87	34.53	42.96	46.72	54.00	7.28	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

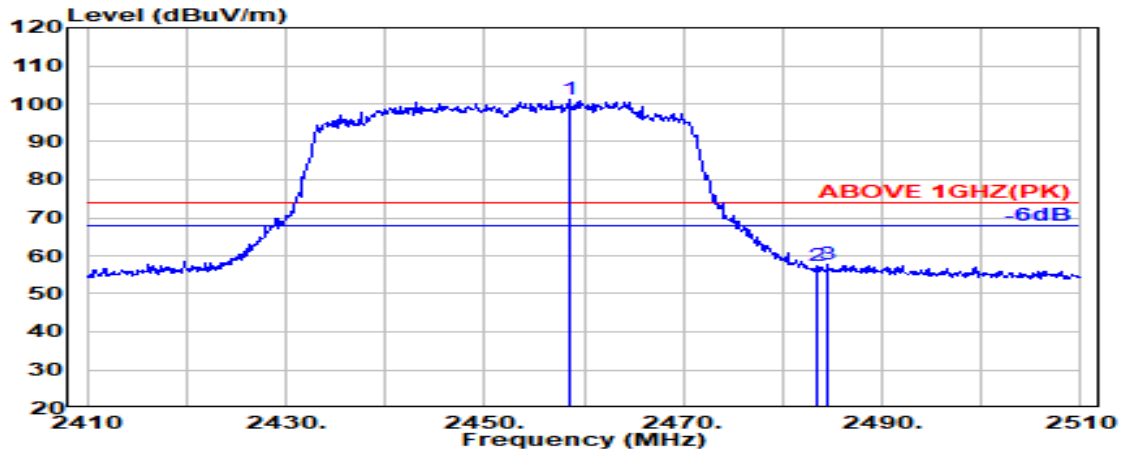

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	32.10	5.83	34.52	97.68	101.09	---	---	Peak
2483.500	32.40	5.87	34.53	53.64	57.38	74.00	16.62	Peak
2484.500	32.42	5.87	34.53	53.99	57.74	74.00	16.26	Peak

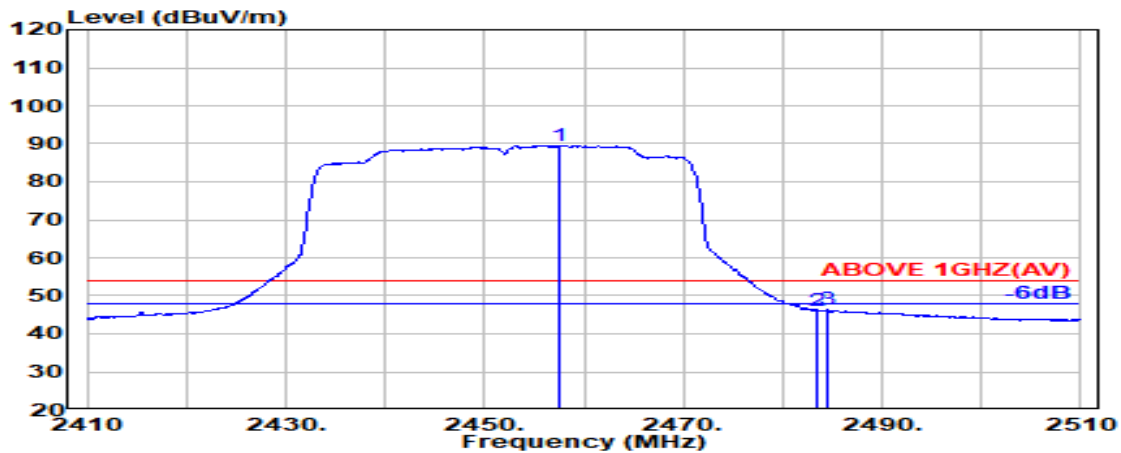


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.400	32.09	5.83	34.52	86.21	89.61	---	---	Average
2483.500	32.40	5.87	34.53	42.36	46.10	54.00	7.90	Average
2484.400	32.41	5.87	34.53	42.48	46.23	54.00	7.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

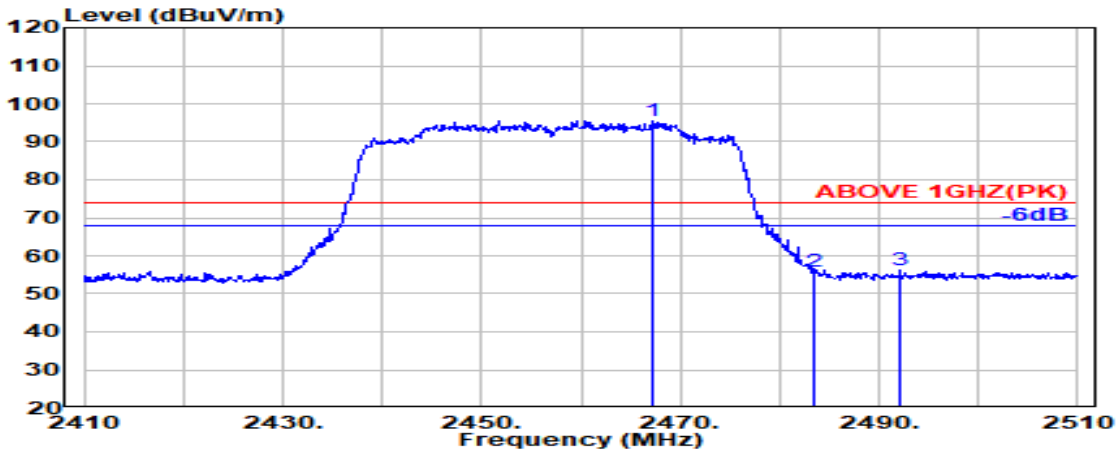

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.100	32.21	5.84	34.52	91.97	95.49	---	---	Peak
2483.500	32.40	5.87	34.53	51.92	55.66	74.00	18.34	Peak
2492.200	32.51	5.88	34.53	52.38	56.24	74.00	17.76	Peak

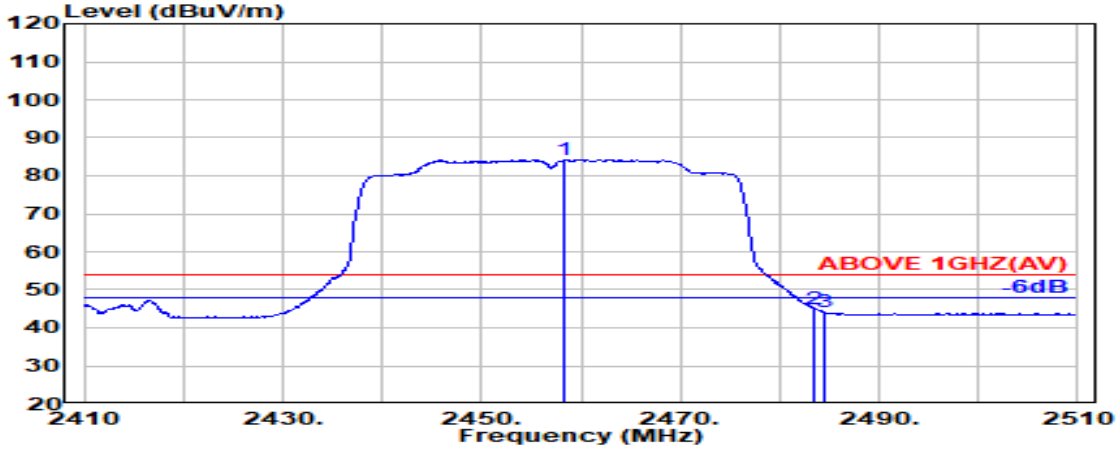


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.400	32.10	5.83	34.52	80.82	84.23	---	---	Average
2483.500	32.40	5.87	34.53	41.33	45.07	54.00	8.93	Average
2484.400	32.41	5.87	34.53	40.45	44.20	54.00	9.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

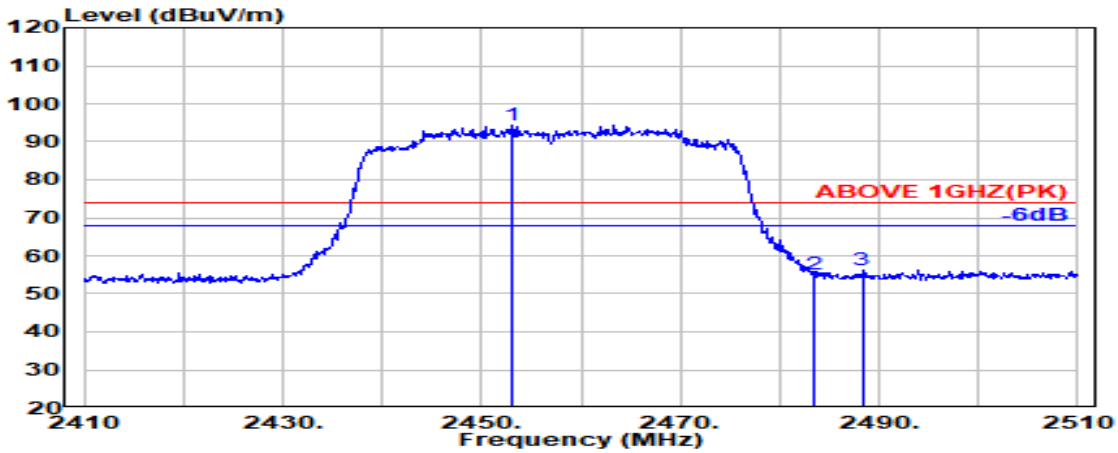

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.000	32.04	5.82	34.52	90.91	94.25	---	---	Peak
2483.500	32.40	5.87	34.53	51.46	55.21	74.00	18.79	Peak
2488.300	32.46	5.87	34.53	52.24	56.05	74.00	17.95	Peak

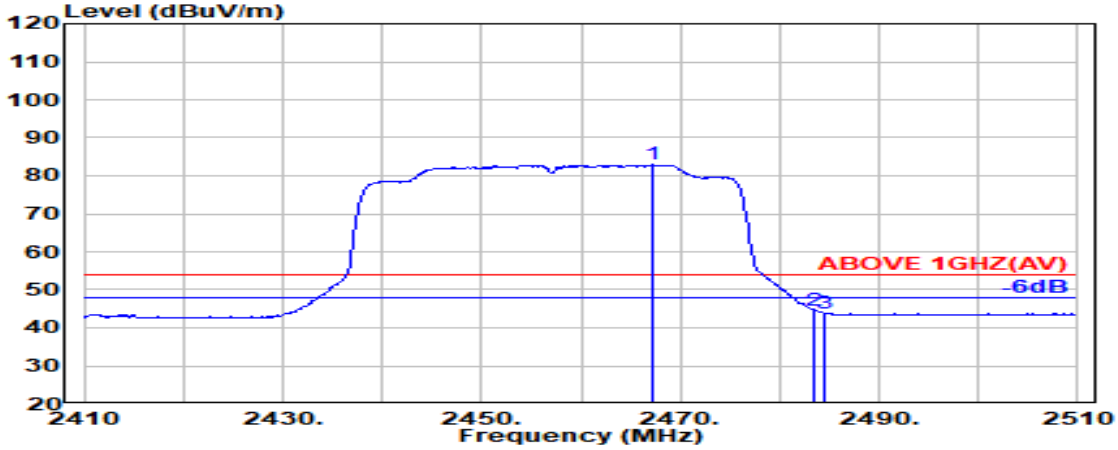


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.100	32.21	5.84	34.52	79.42	82.95	---	---	Average
2483.500	32.40	5.87	34.53	40.90	44.64	54.00	9.36	Average
2484.400	32.41	5.87	34.53	40.19	43.95	54.00	10.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

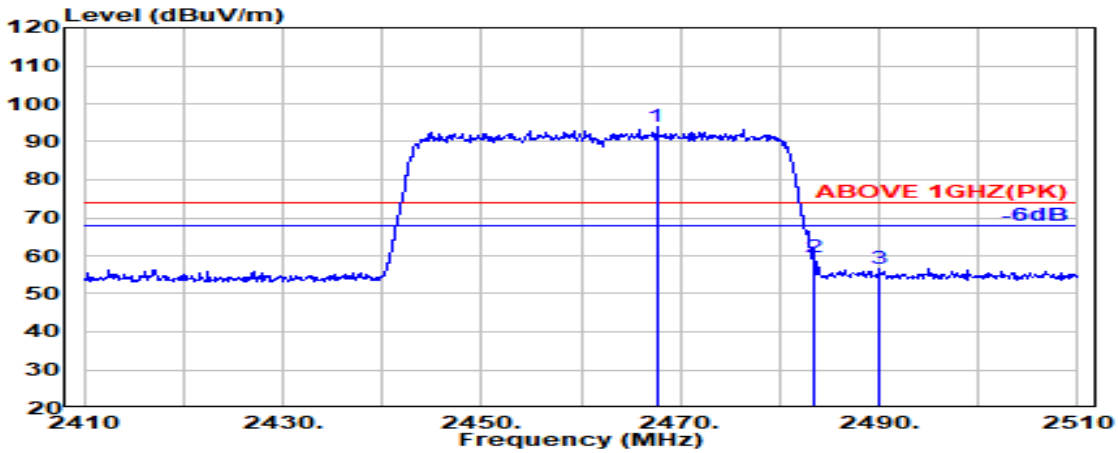

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	32.21	5.84	34.52	90.58	94.11	---	---	Peak
2483.500	32.40	5.87	34.53	55.80	59.55	74.00	14.45	Peak
2490.100	32.48	5.88	34.53	52.85	56.68	74.00	17.32	Peak

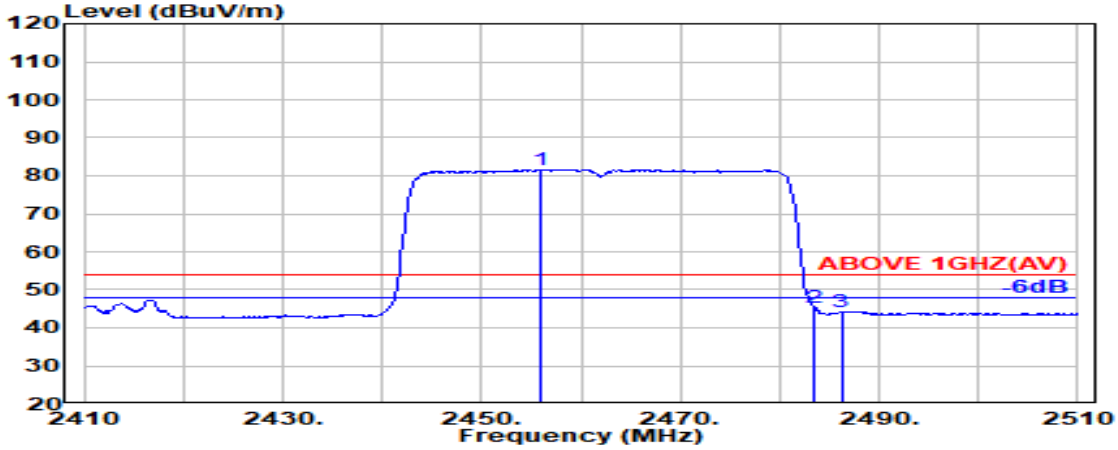


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	32.07	5.82	34.52	78.30	81.68	---	---	Average
2483.500	32.40	5.87	34.53	41.65	45.39	54.00	8.61	Average
2486.200	32.44	5.87	34.53	40.50	44.28	54.00	9.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

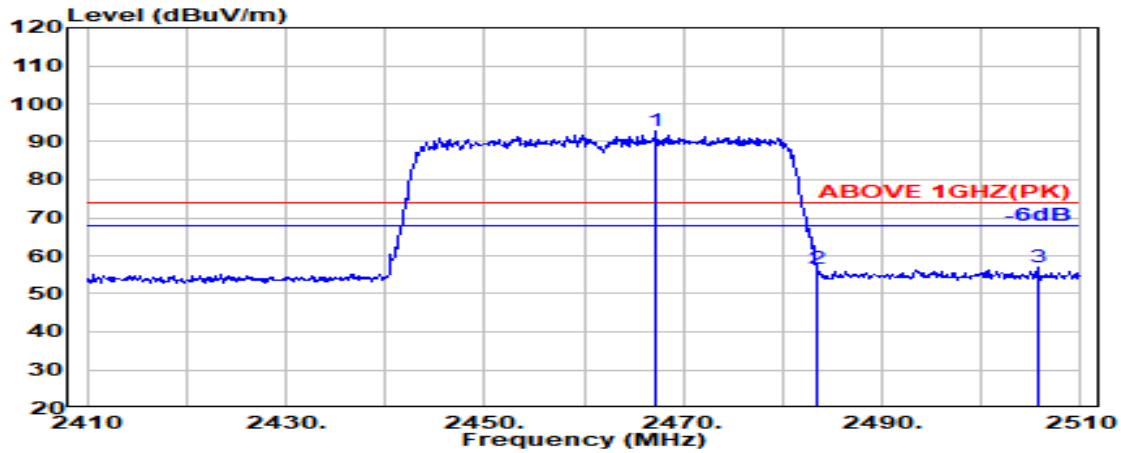

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.200	32.21	5.84	34.52	89.26	92.78	---	---	Peak
2483.500	32.40	5.87	34.53	52.69	56.43	74.00	17.57	Peak
2505.600	32.58	5.90	34.53	52.98	56.93	74.00	17.07	Peak

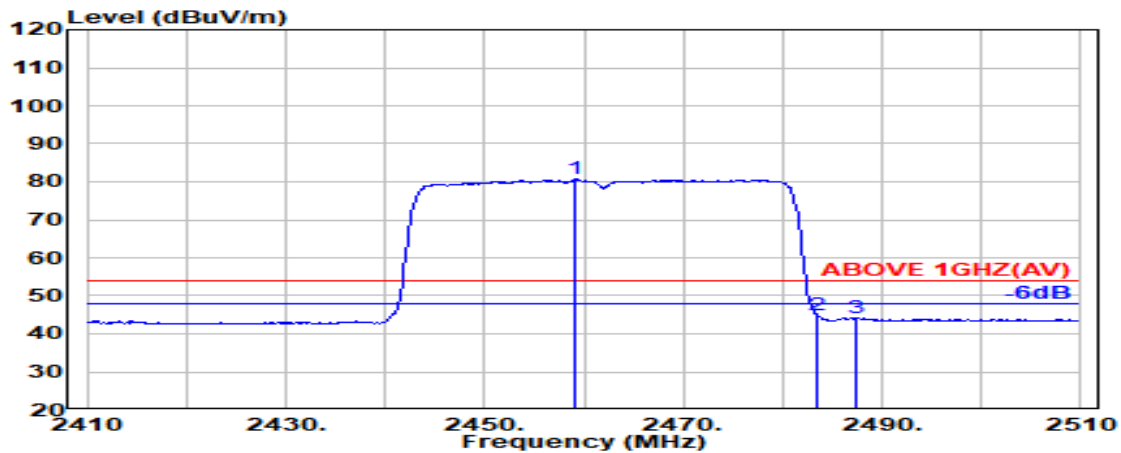


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	32.11	5.83	34.52	77.32	80.74	---	---	Average
2483.500	32.40	5.87	34.53	41.13	44.87	54.00	9.13	Average
2487.300	32.45	5.87	34.53	40.42	44.21	54.00	9.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

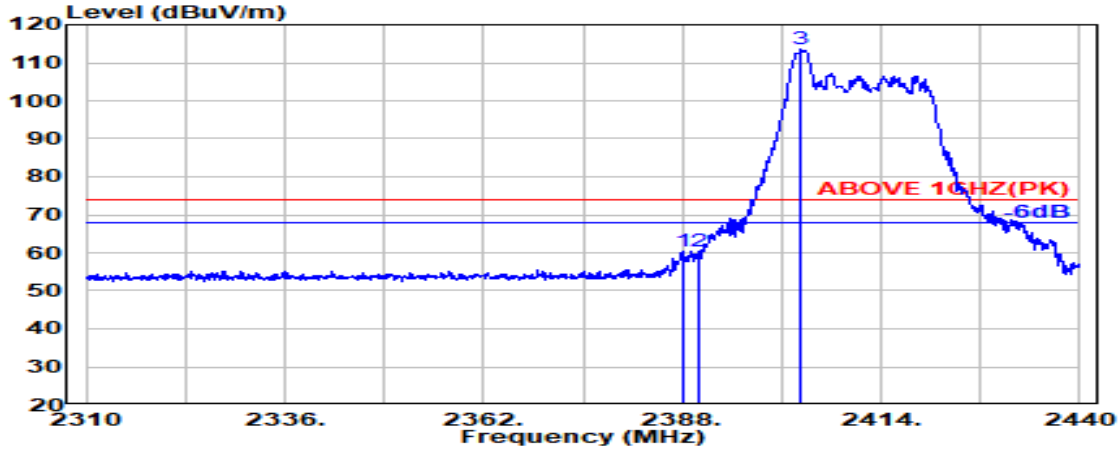

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	32.00	5.72	34.51	57.09	60.30	74.00	13.70	Peak
2390.000	32.00	5.72	34.51	57.11	60.33	74.00	13.67	Peak
@ 2403.600	32.00	5.74	34.51	110.34	113.57	---	---	Peak

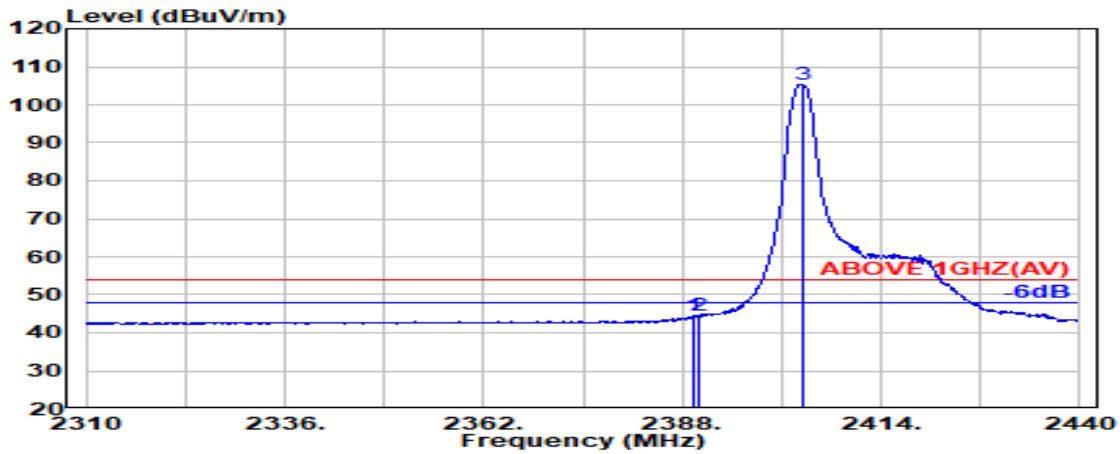


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	32.00	5.72	34.51	41.20	44.41	54.00	9.59	Average
2390.000	32.00	5.72	34.51	41.28	44.50	54.00	9.50	Average
@ 2403.800	32.00	5.74	34.51	102.17	105.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

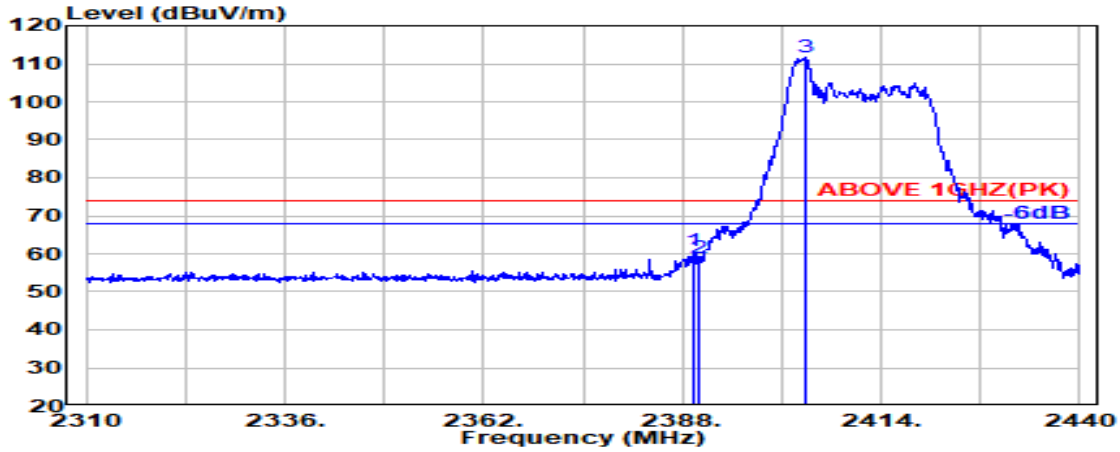

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	57.50	60.72	74.00	13.28	Peak
2390.000	32.00	5.72	34.51	55.75	58.97	74.00	15.03	Peak
@ 2404.000	32.00	5.74	34.51	108.29	111.52	---	---	Peak

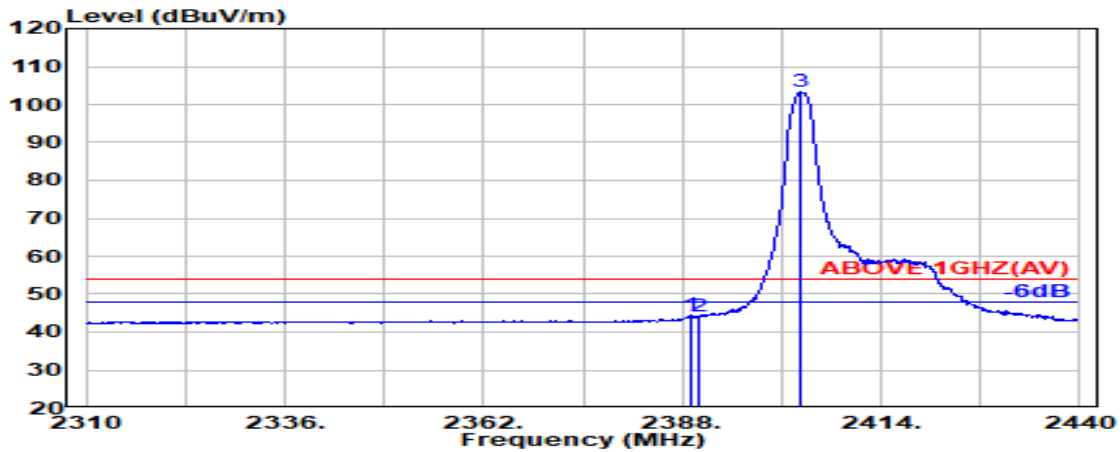


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	32.00	5.72	34.51	41.41	44.62	54.00	9.38	Average
2390.000	32.00	5.72	34.51	40.87	44.08	54.00	9.92	Average
@ 2403.400	32.00	5.74	34.51	100.14	103.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

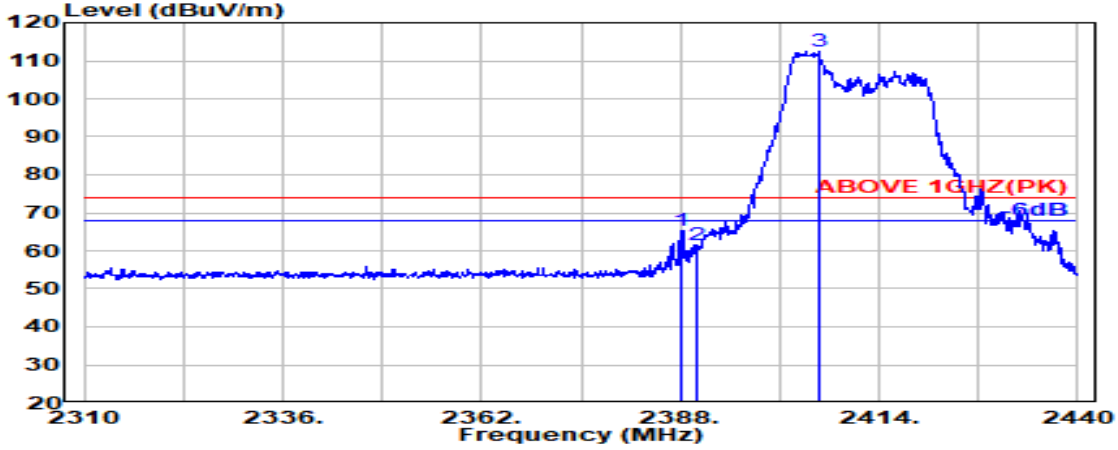

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	32.00	5.72	34.51	62.03	65.24	74.00	8.76	Peak
2390.000	32.00	5.72	34.51	58.22	61.44	74.00	12.56	Peak
@ 2406.100	32.00	5.75	34.51	109.37	112.61	---	---	Peak

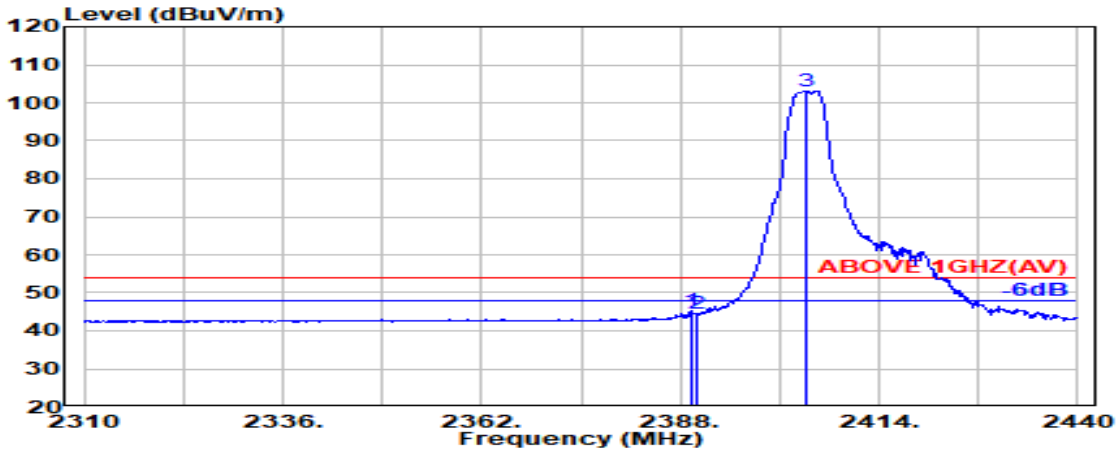


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	42.14	45.36	54.00	8.64	Average
2390.000	32.00	5.72	34.51	41.48	44.69	54.00	9.31	Average
@ 2404.600	32.00	5.75	34.51	99.88	103.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

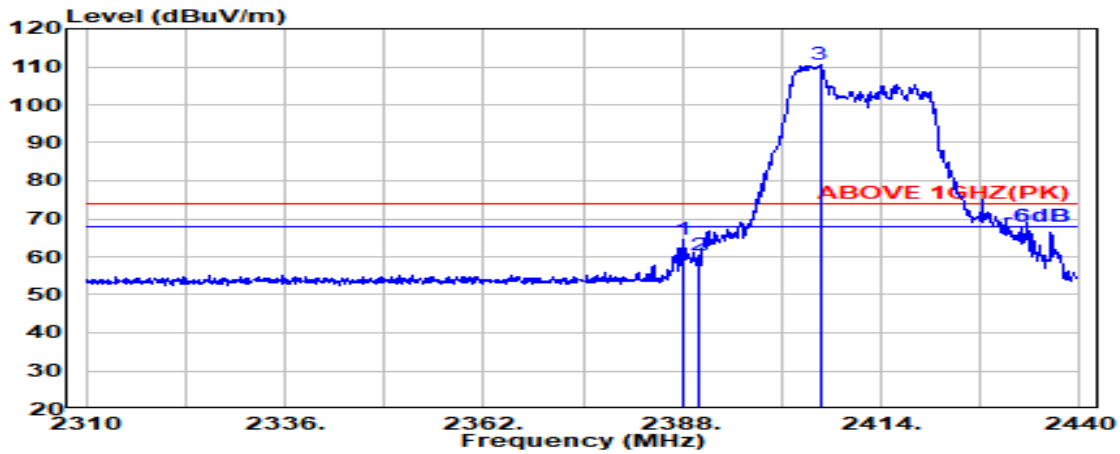

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.100	32.00	5.72	34.51	61.48	64.69	74.00	9.31	Peak
2390.000	32.00	5.72	34.51	57.06	60.27	74.00	13.73	Peak
@ 2406.000	32.00	5.75	34.51	107.44	110.67	---	---	Peak

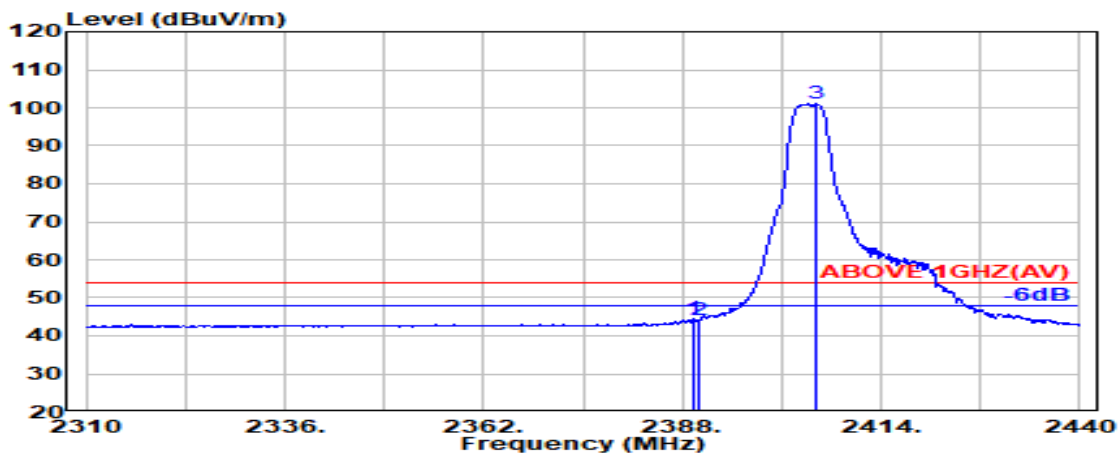


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	41.25	44.46	54.00	9.54	Average
2390.000	32.00	5.72	34.51	40.94	44.16	54.00	9.84	Average
@ 2405.600	32.00	5.75	34.51	97.79	101.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

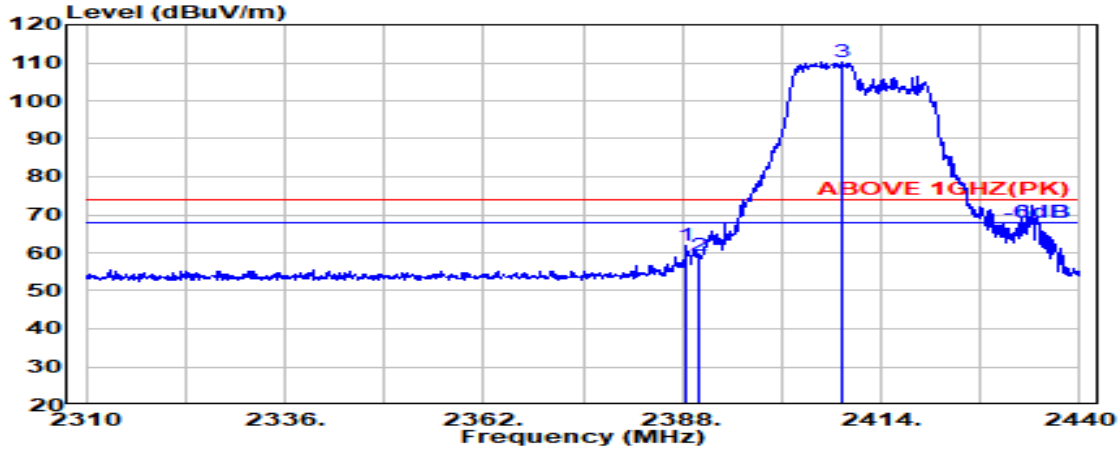

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	32.00	5.72	34.51	58.66	61.87	74.00	12.13	Peak
2390.000	32.00	5.72	34.51	55.92	59.13	74.00	14.87	Peak
@ 2408.900	32.00	5.75	34.51	106.81	110.05	---	---	Peak

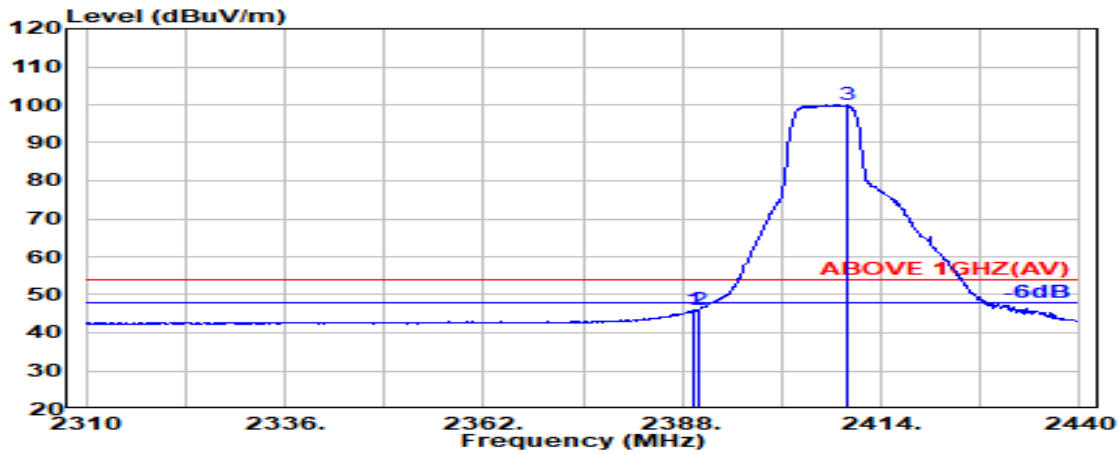


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	32.00	5.72	34.51	42.66	45.88	54.00	8.12	Average
2390.000	32.00	5.72	34.51	42.76	45.97	54.00	8.03	Average
@ 2409.500	32.00	5.75	34.51	96.83	100.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

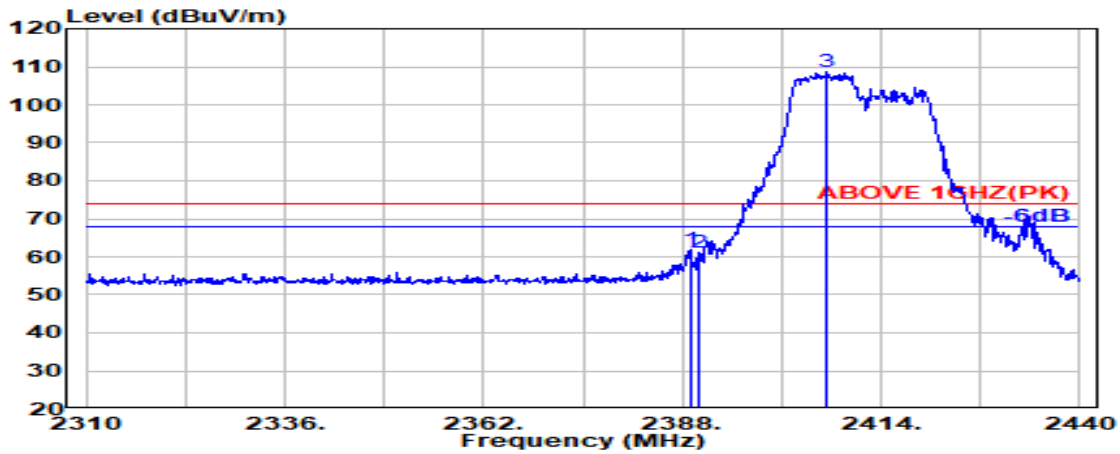

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	32.00	5.72	34.51	58.52	61.74	74.00	12.26	Peak
2390.000	32.00	5.72	34.51	57.81	61.02	74.00	12.98	Peak
@ 2407.000	32.00	5.75	34.51	105.30	108.54	---	---	Peak

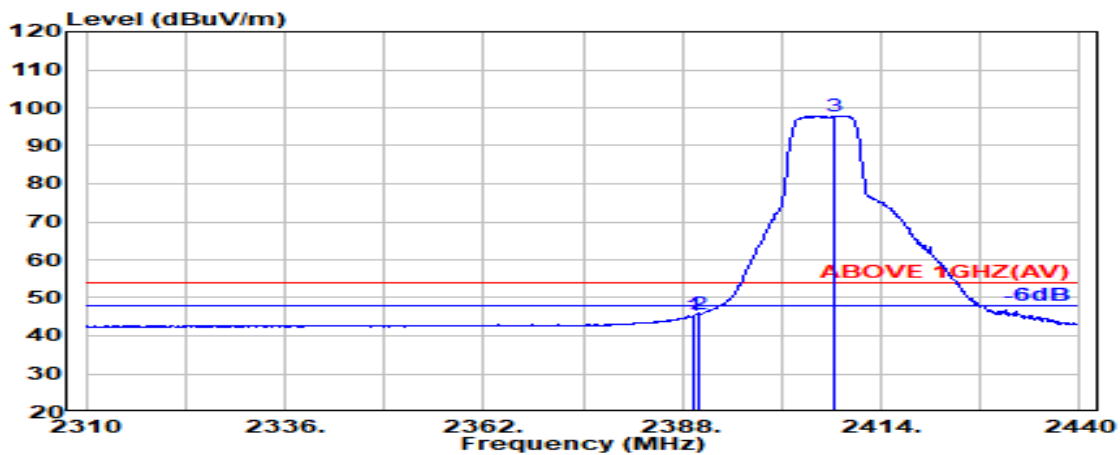


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	42.21	45.42	54.00	8.58	Average
2390.000	32.00	5.72	34.51	42.46	45.68	54.00	8.32	Average
@ 2408.000	32.00	5.75	34.51	94.68	97.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

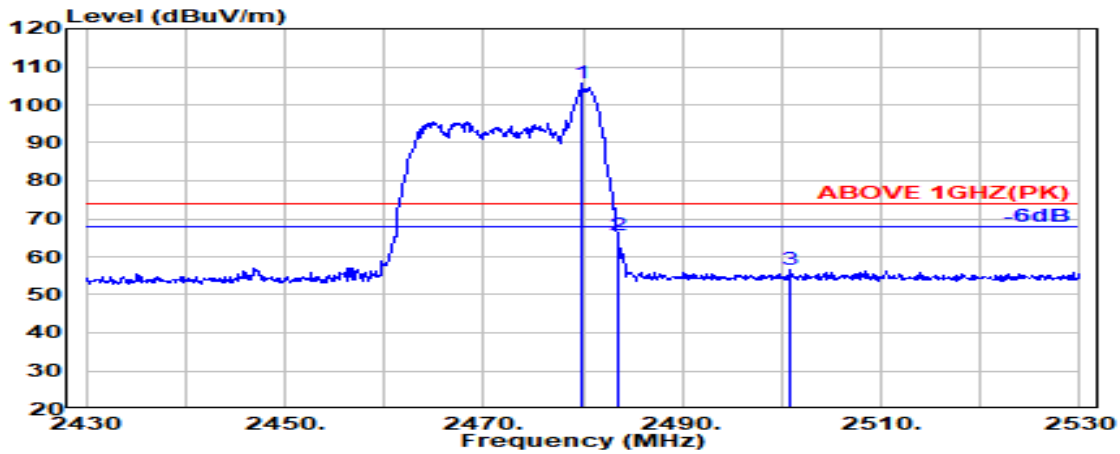

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	32.36	5.86	34.53	101.97	105.66	---	---	Peak
2483.500	32.40	5.87	34.53	61.93	65.67	74.00	8.33	Peak
2500.900	32.60	5.89	34.53	52.52	56.48	74.00	17.52	Peak

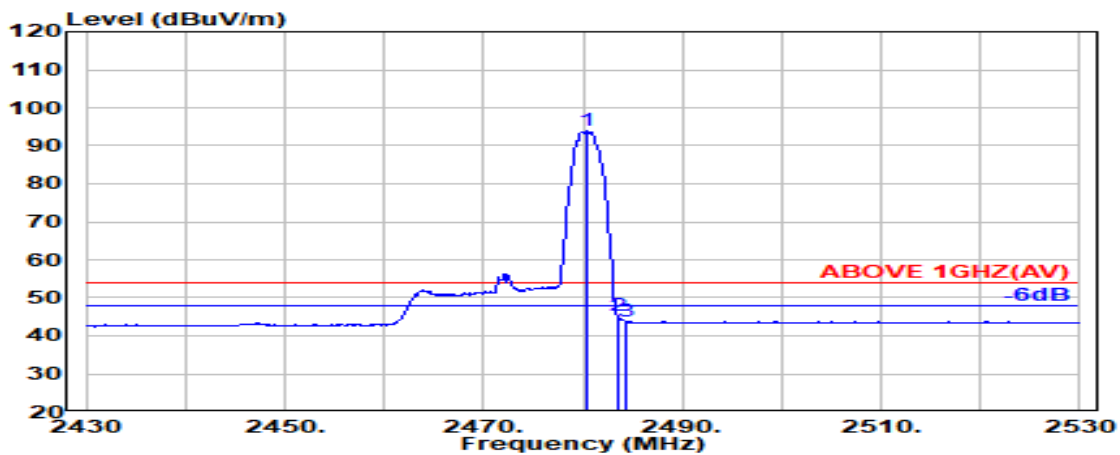


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	32.37	5.86	34.53	90.39	94.09	---	---	Average
2483.500	32.40	5.87	34.53	41.66	45.41	54.00	8.59	Average
2484.400	32.41	5.87	34.53	40.02	43.77	54.00	10.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

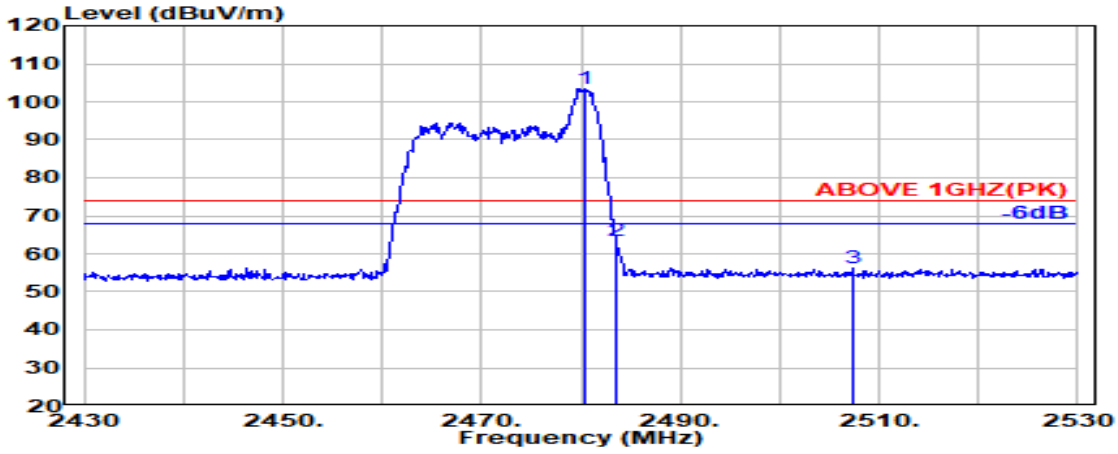

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	32.37	5.86	34.53	99.88	103.58	---	---	Peak
2483.500	32.40	5.87	34.53	59.50	63.25	74.00	10.75	Peak
2507.300	32.57	5.91	34.53	52.32	56.26	74.00	17.74	Peak

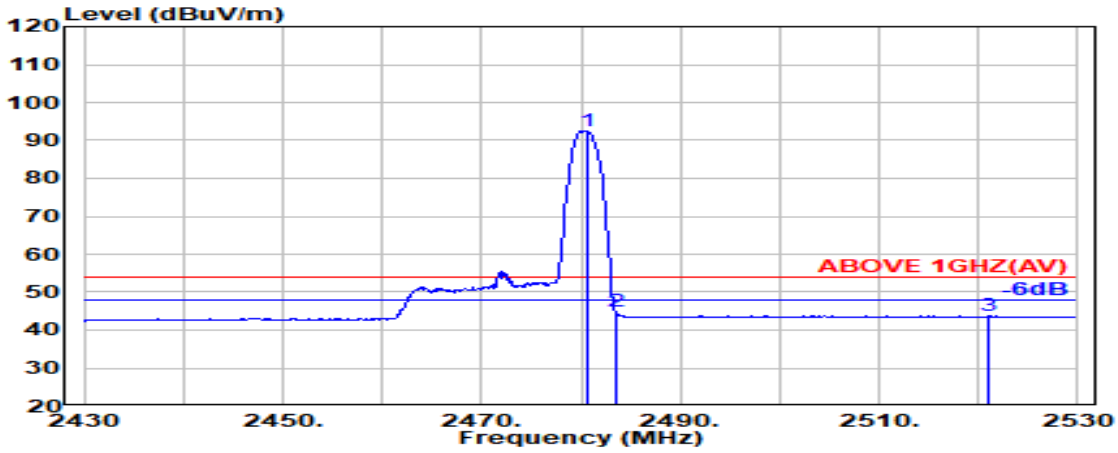


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.600	32.37	5.86	34.53	88.92	92.62	---	---	Average
2483.500	32.40	5.87	34.53	41.21	44.96	54.00	9.04	Average
2521.100	32.52	5.94	34.54	39.91	43.83	54.00	10.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

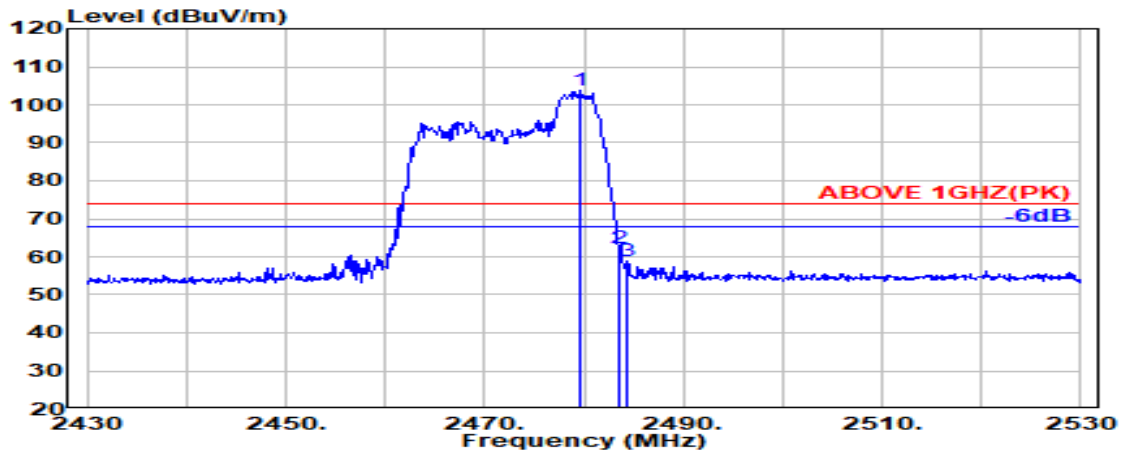

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	32.36	5.86	34.53	100.15	103.84	---	---	Peak
2483.500	32.40	5.87	34.53	58.55	62.29	74.00	11.71	Peak
2484.400	32.41	5.87	34.53	55.04	58.80	74.00	15.20	Peak

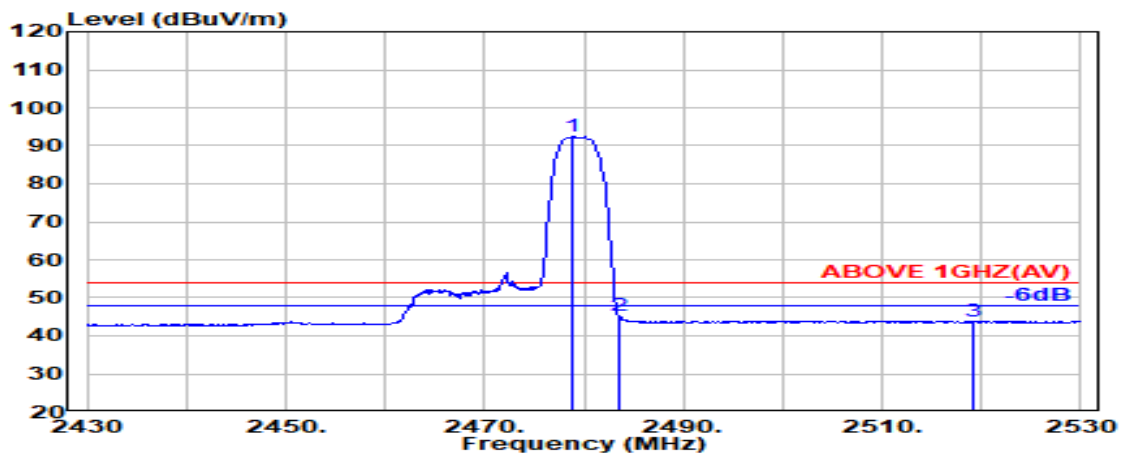


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	32.35	5.86	34.53	88.65	92.34	---	---	Average
2483.500	32.40	5.87	34.53	41.55	45.29	54.00	8.71	Average
2519.100	32.52	5.94	34.53	39.95	43.88	54.00	10.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

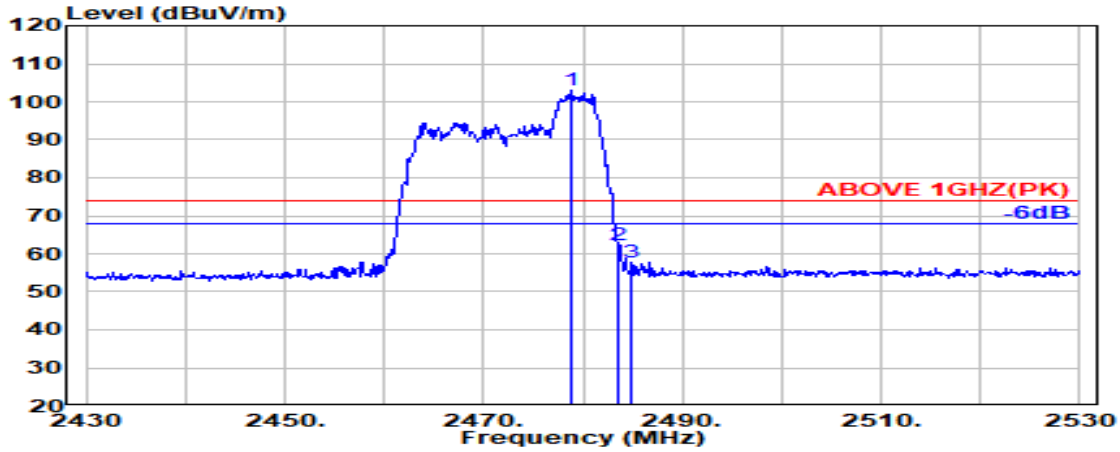

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	32.35	5.86	34.53	99.53	103.21	---	---	Peak
2483.500	32.40	5.87	34.53	58.63	62.38	74.00	11.62	Peak
2484.900	32.42	5.87	34.53	54.02	57.78	74.00	16.22	Peak

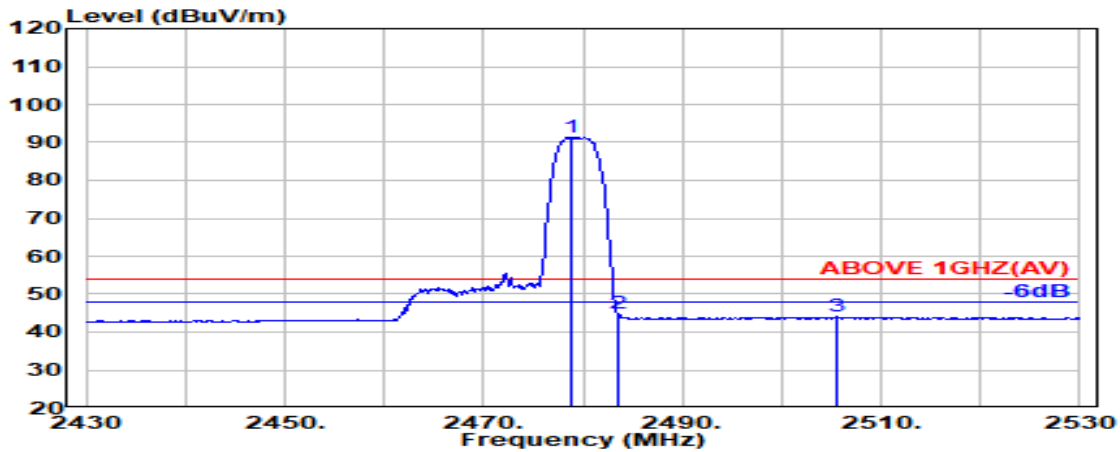


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	32.35	5.86	34.53	87.71	91.39	---	---	Average
2483.500	32.40	5.87	34.53	41.24	44.98	54.00	9.02	Average
2505.600	32.58	5.90	34.53	40.14	44.09	54.00	9.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

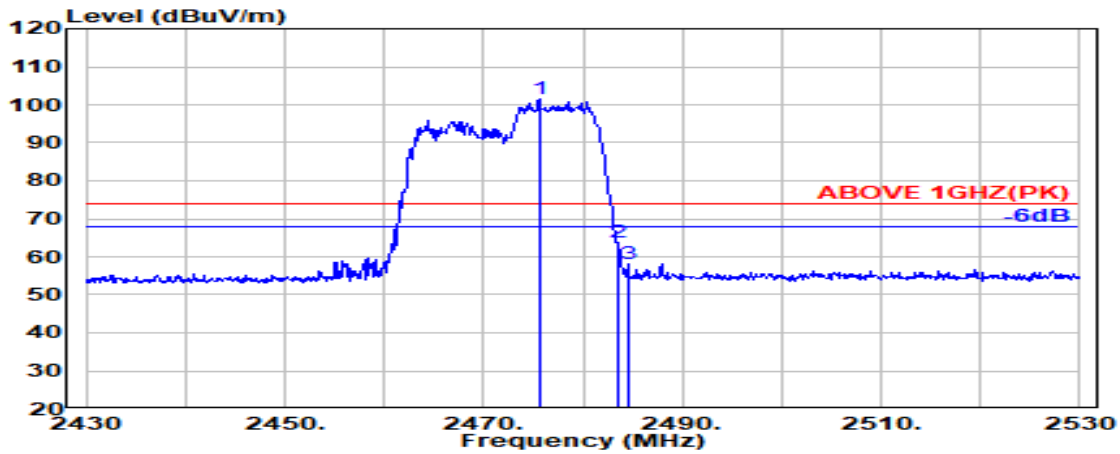

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.600	32.31	5.85	34.53	97.69	101.33	---	---	Peak
2483.500	32.40	5.87	34.53	60.18	63.93	74.00	10.07	Peak
2484.500	32.42	5.87	34.53	54.52	58.27	74.00	15.73	Peak

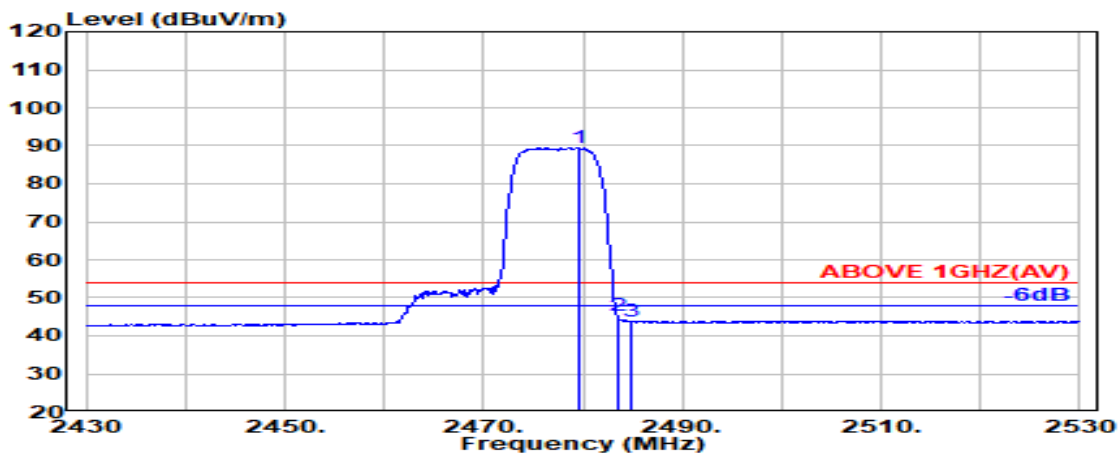


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	32.36	5.86	34.53	85.79	89.48	---	---	Average
2483.500	32.40	5.87	34.53	41.40	45.14	54.00	8.86	Average
2484.800	32.42	5.87	34.53	40.18	43.94	54.00	10.06	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

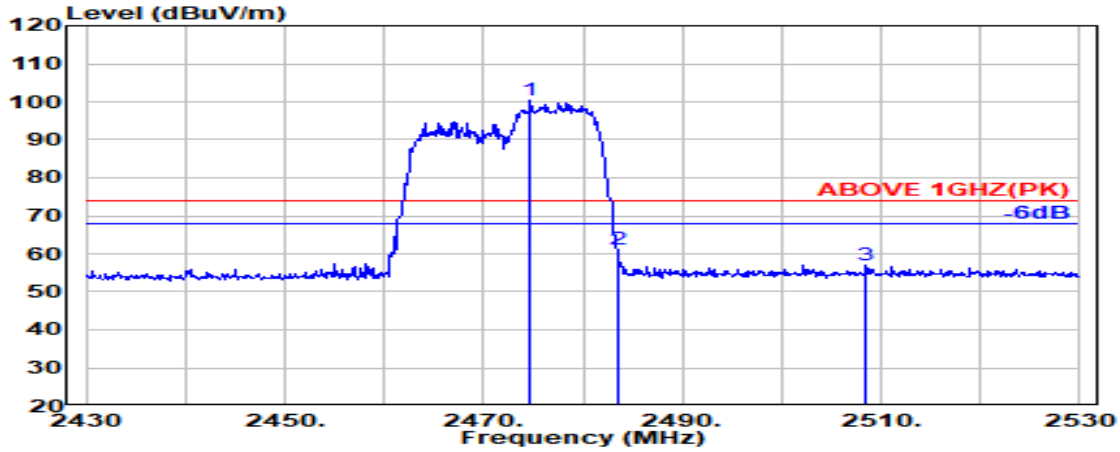

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.700	32.30	5.85	34.52	96.84	100.46	---	---	Peak
2483.500	32.40	5.87	34.53	57.21	60.96	74.00	13.04	Peak
2508.500	32.57	5.91	34.53	52.94	56.88	74.00	17.12	Peak

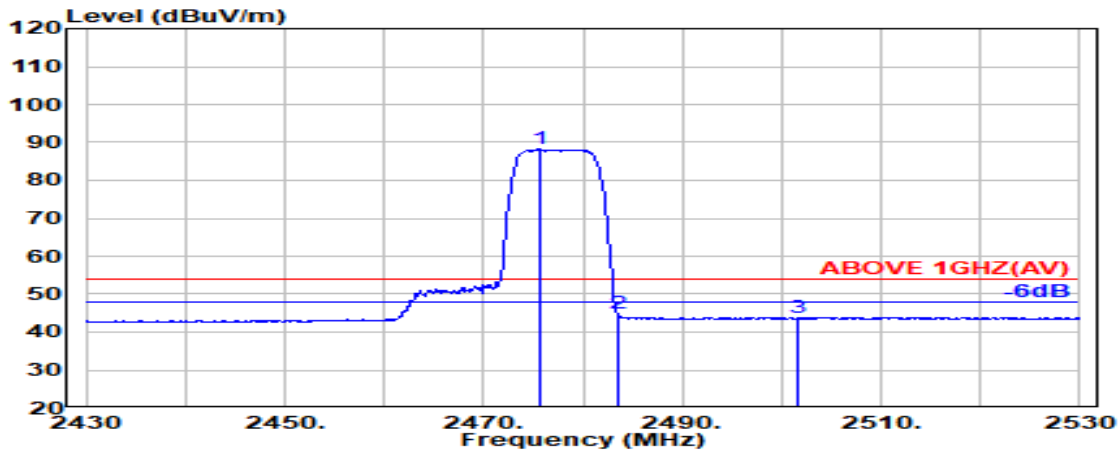


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.800	32.31	5.85	34.53	84.61	88.25	---	---	Average
2483.500	32.40	5.87	34.53	41.14	44.88	54.00	9.12	Average
2501.700	32.59	5.89	34.53	39.99	43.94	54.00	10.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

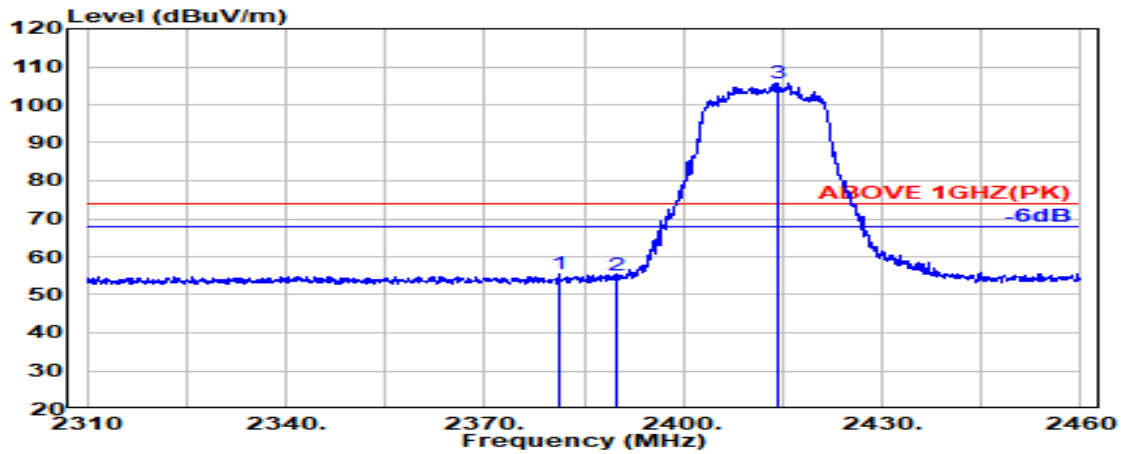

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.300	32.00	5.71	34.51	52.09	55.30	74.00	18.70	Peak
2390.000	32.00	5.72	34.51	52.04	55.26	74.00	18.74	Peak
@ 2414.100	32.00	5.76	34.51	102.48	105.73	---	---	Peak

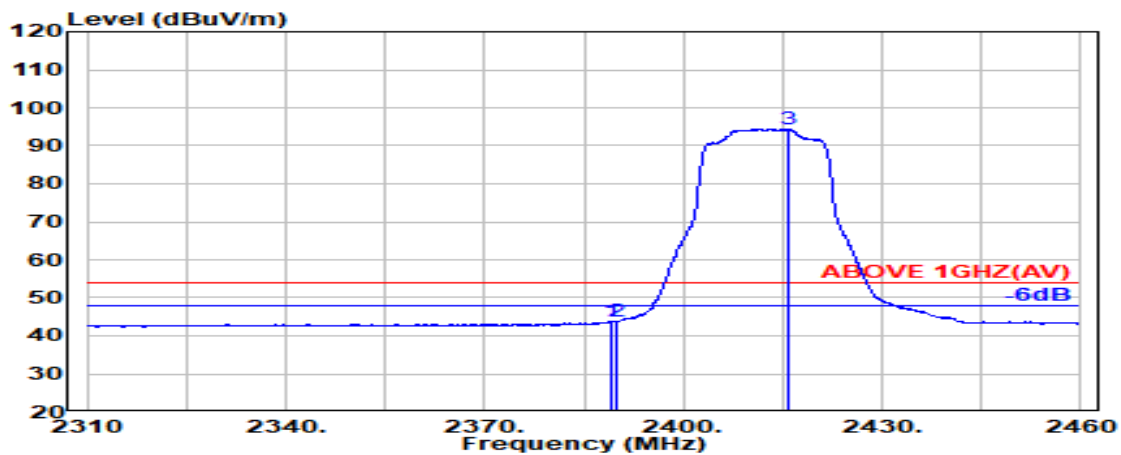


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	32.00	5.72	34.51	40.60	43.81	54.00	10.19	Average
2390.000	32.00	5.72	34.51	40.60	43.81	54.00	10.19	Average
@ 2415.800	32.00	5.76	34.51	91.26	94.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

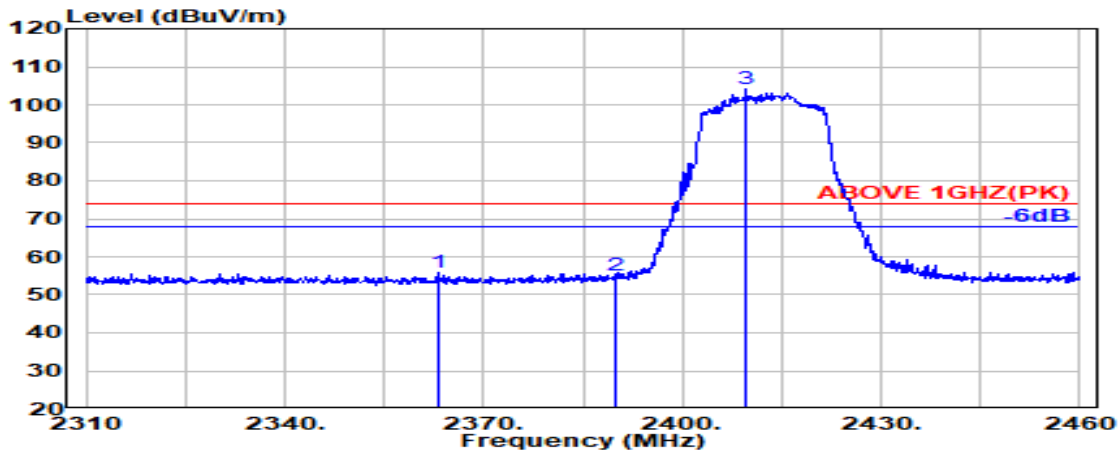

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2363.300	32.00	5.68	34.50	52.81	55.99	74.00	18.01	Peak
2390.000	32.00	5.72	34.51	51.99	55.20	74.00	18.80	Peak
@ 2409.500	32.00	5.75	34.51	100.75	103.99	---	---	Peak

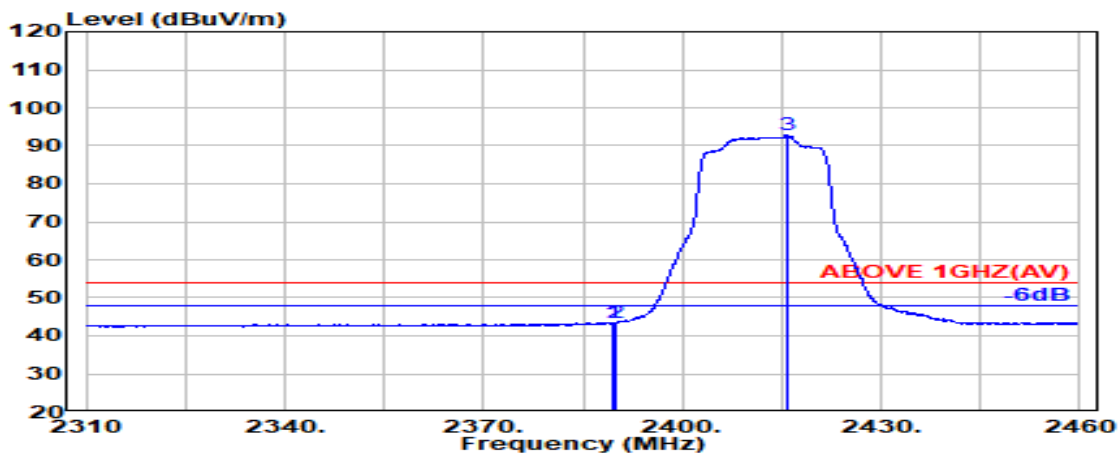


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	32.00	5.72	34.51	40.36	43.58	54.00	10.42	Average
2390.000	32.00	5.72	34.51	40.21	43.43	54.00	10.57	Average
@ 2415.700	32.00	5.76	34.51	89.54	92.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

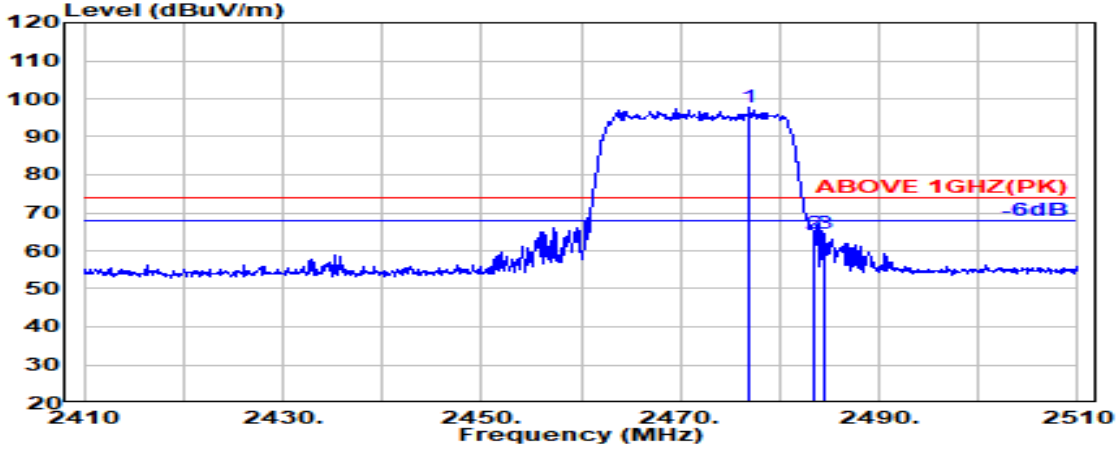

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.900	32.32	5.86	34.53	94.18	97.83	---	---	Peak
2483.500	32.40	5.87	34.53	60.94	64.69	74.00	9.31	Peak
2484.400	32.41	5.87	34.53	60.77	64.52	74.00	9.48	Peak

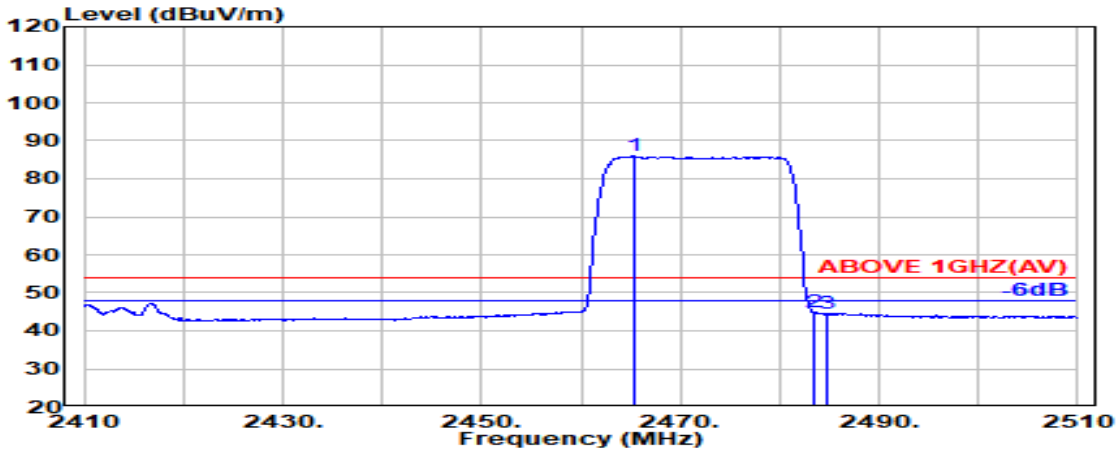


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	32.19	5.84	34.52	82.67	86.17	---	---	Average
2483.500	32.40	5.87	34.53	41.06	44.81	54.00	9.19	Average
2484.700	32.42	5.87	34.53	40.82	44.57	54.00	9.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

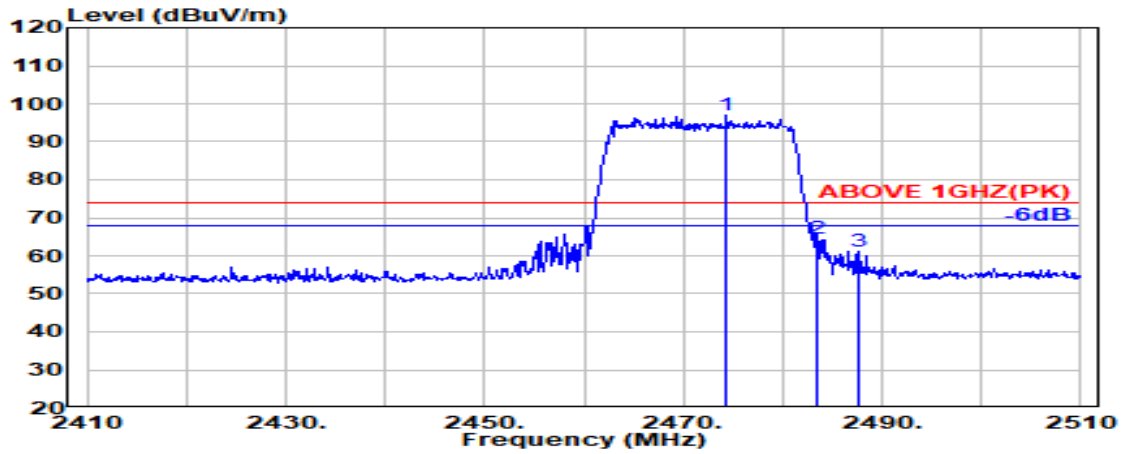

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.300	32.29	5.85	34.52	93.36	96.98	---	---	Peak
2483.500	32.40	5.87	34.53	60.92	64.66	74.00	9.34	Peak
2487.600	32.45	5.87	34.53	57.24	61.04	74.00	12.96	Peak

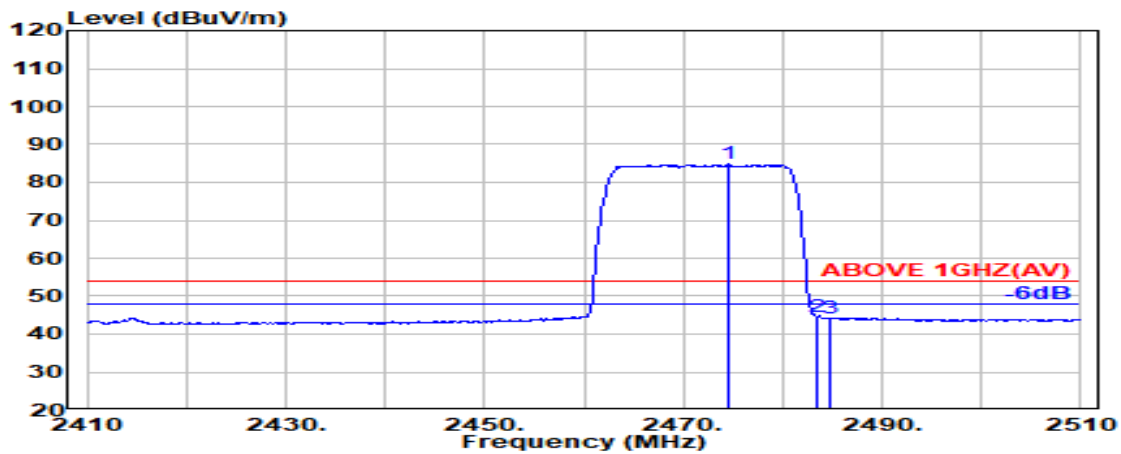


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.600	32.30	5.85	34.52	81.11	84.73	---	---	Average
2483.500	32.40	5.87	34.53	40.84	44.58	54.00	9.42	Average
2484.800	32.42	5.87	34.53	40.57	44.33	54.00	9.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

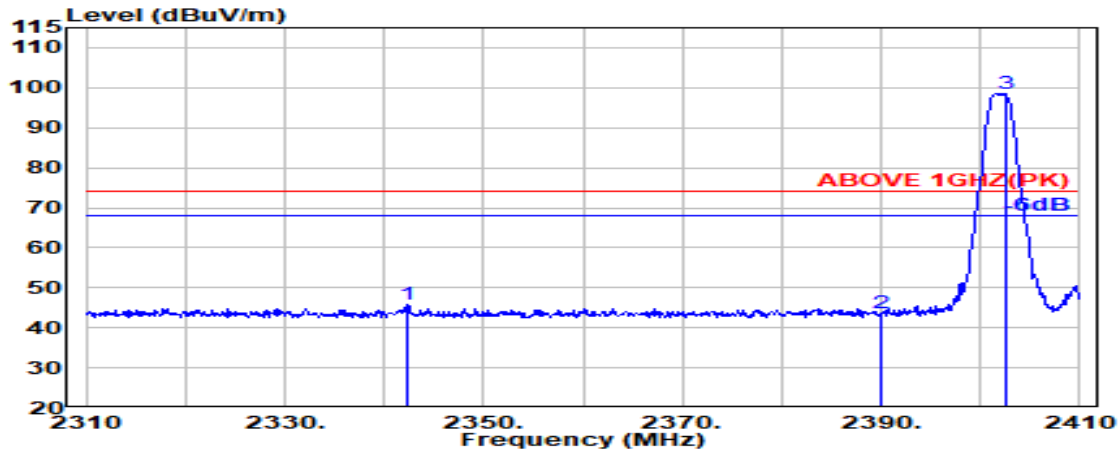

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.200	32.03	5.65	34.50	42.46	45.64	74.00	28.36	Peak
2390.000	32.00	5.72	34.51	40.30	43.52	74.00	30.48	Peak
@ 2402.500	32.00	5.74	34.51	95.18	98.42	---	---	Peak

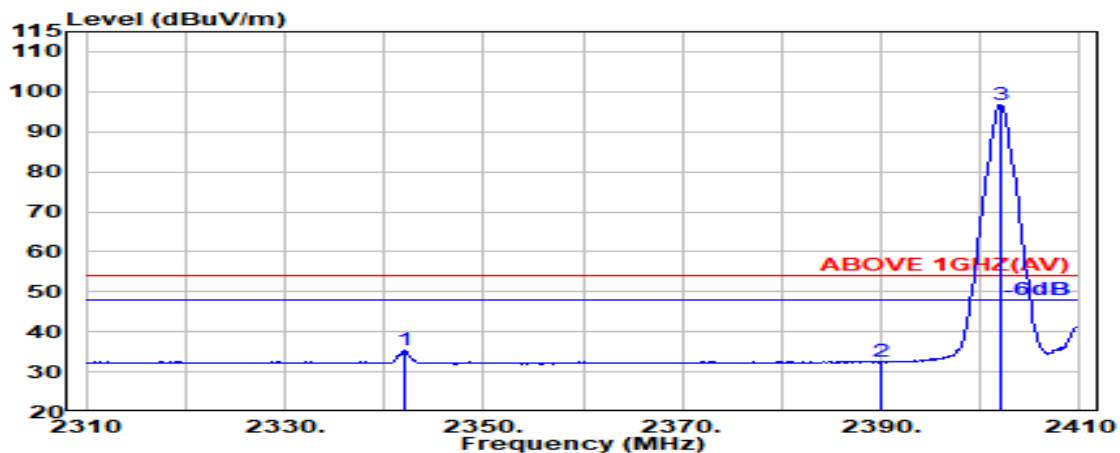


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.100	32.03	5.65	34.50	32.12	35.30	54.00	18.70	Average
2390.000	32.00	5.72	34.51	29.23	32.45	54.00	21.55	Average
@ 2402.000	32.00	5.74	34.51	93.50	96.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

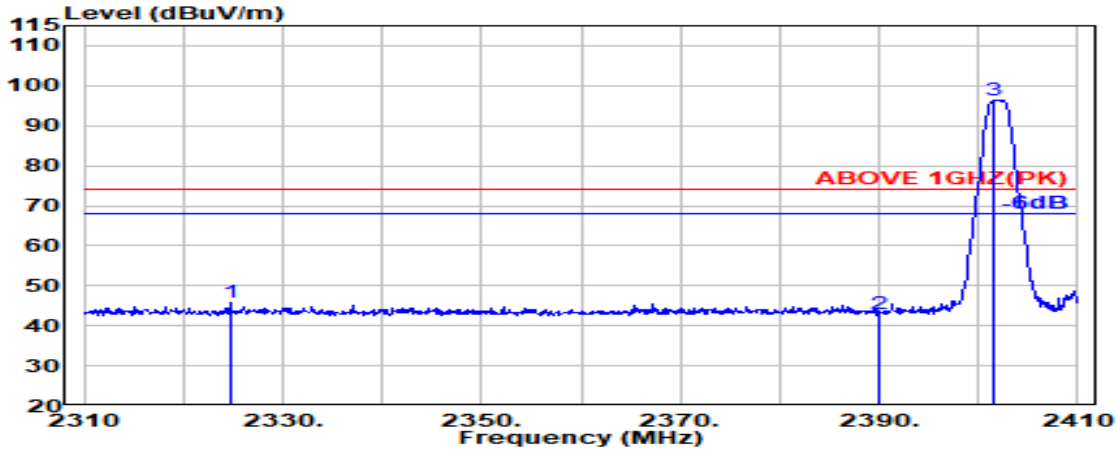

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2324.700	32.10	5.62	34.49	42.42	45.65	74.00	28.35	Peak
2390.000	32.00	5.72	34.51	39.88	43.09	74.00	30.91	Peak
@ 2401.500	32.00	5.74	34.51	93.26	96.49	---	---	Peak

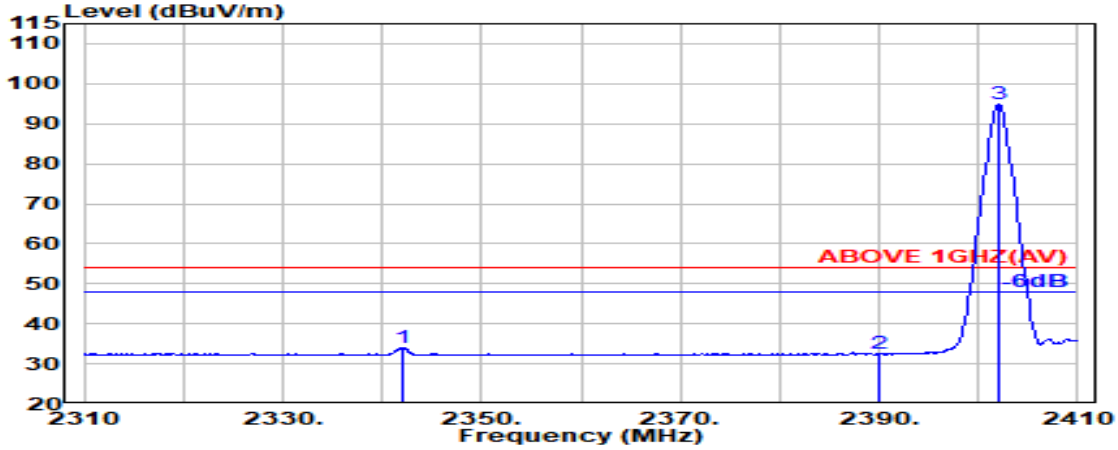


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	32.03	5.65	34.50	30.97	34.15	54.00	19.85	Average
2390.000	32.00	5.72	34.51	29.16	32.37	54.00	21.63	Average
@ 2402.000	32.00	5.74	34.51	91.59	94.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

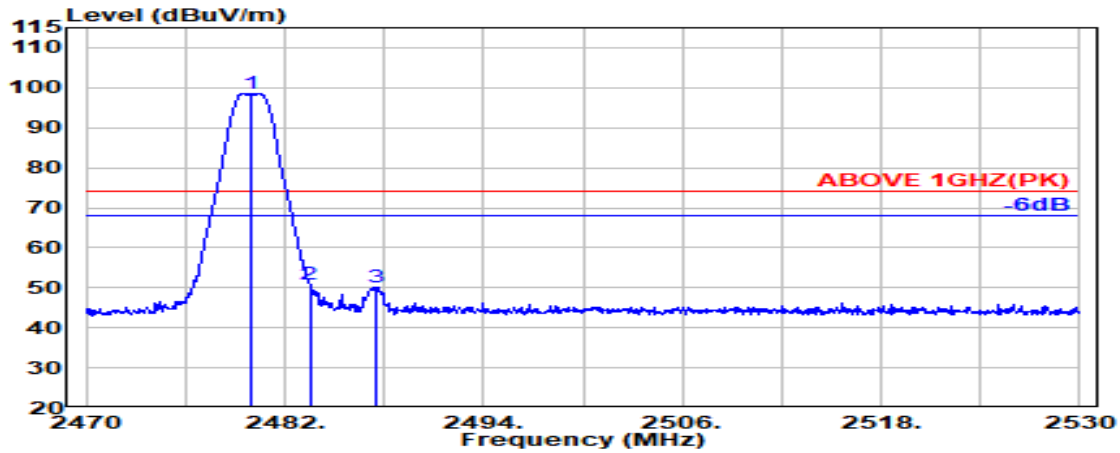

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	32.36	5.86	34.53	94.88	98.58	---	---	Peak
2483.500	32.40	5.87	34.53	47.15	50.89	74.00	23.11	Peak
2487.450	32.45	5.87	34.53	46.44	50.23	74.00	23.77	Peak

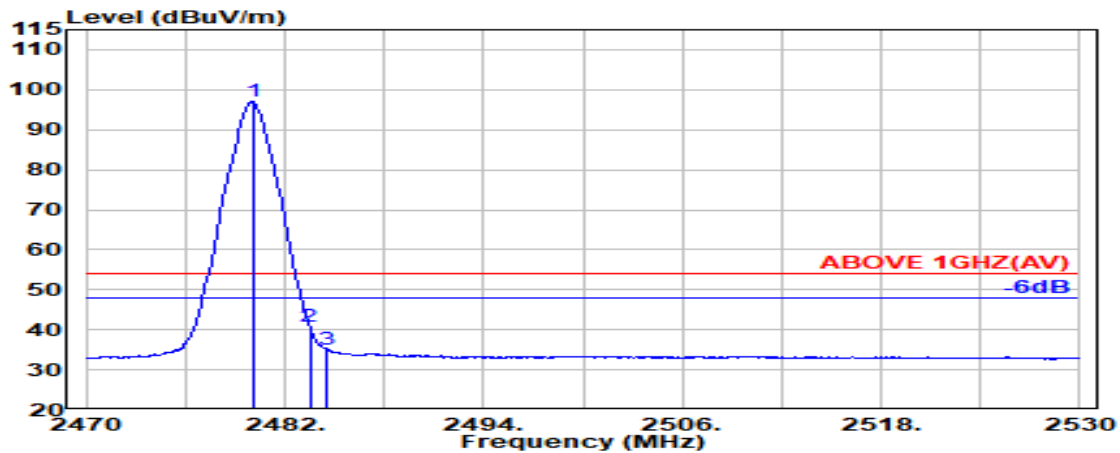


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	32.36	5.86	34.53	93.22	96.91	---	---	Average
2483.500	32.40	5.87	34.53	37.17	40.91	54.00	13.09	Average
2484.500	32.42	5.87	34.53	31.39	35.15	54.00	18.85	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

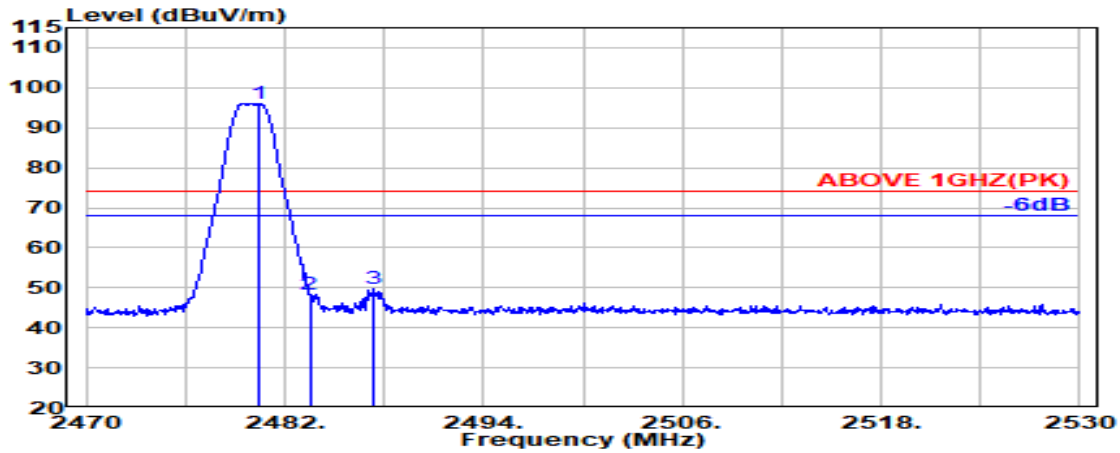

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.37	5.86	34.53	92.42	96.13	---	---	Peak
2483.500	32.40	5.87	34.53	44.50	48.24	74.00	25.76	Peak
2487.400	32.45	5.87	34.53	45.83	49.62	74.00	24.38	Peak

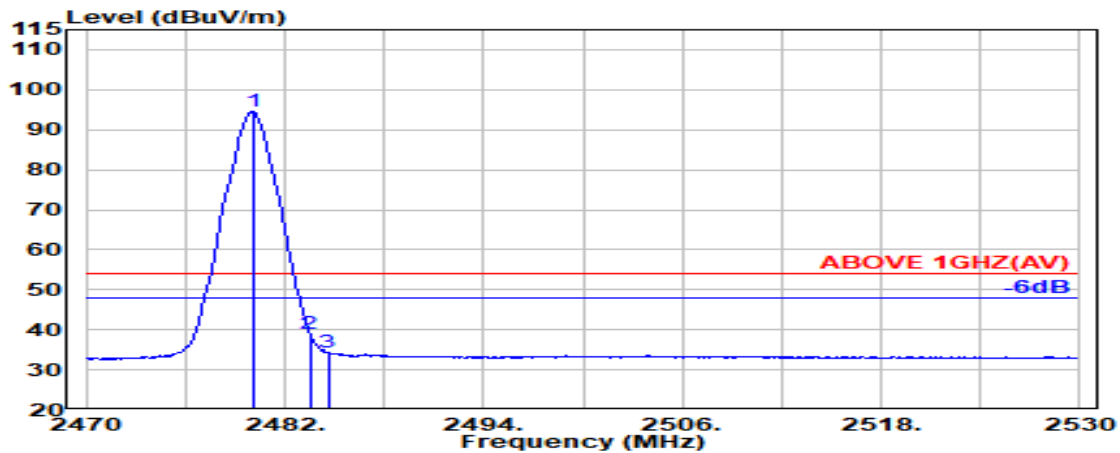

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	32.36	5.86	34.53	90.96	94.66	---	---	Average
2483.500	32.40	5.87	34.53	35.42	39.16	54.00	14.84	Average
2484.600	32.42	5.87	34.53	30.61	34.37	54.00	19.63	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	34.59	42.87	54.00	11.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	35.03	43.31	54.00	10.69	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	34.11	42.39	54.00	11.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	33.63	41.91	54.00	12.09	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	34.83	43.12	54.00	10.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	33.72	42.00	54.00	12.00	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	34.33	42.62	54.00	11.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	34.83	43.12	54.00	10.88	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	35.11	43.39	54.00	10.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	34.28	42.56	54.00	11.44	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	34.41	42.69	54.00	11.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.06	8.64	34.42	35.05	43.34	54.00	10.66	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz		
------	-------------	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	34.11	8.53	34.43	35.41	43.61	54.00	10.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	34.11	8.53	34.43	34.38	42.58	54.00	11.42	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz		
------	-------------	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	34.08	8.63	34.42	34.43	42.72	54.00	11.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	34.08	8.63	34.42	35.55	43.85	54.00	10.15	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz		
------	-------------	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.22	8.75	34.41	35.15	43.71	54.00	10.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.22	8.75	34.41	35.55	44.11	54.00	9.89	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.