


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	153
A.2.3 Emissions in Non-restricted Frequency Bands.....	168
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH	169
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	169
A.3.2 Measurement Plots	179
A.4 POWER SPECTRAL DENSITY	218
A.4.1 Power Spectral Density Result	218
A.4.2 Measurement Plots	227
A.5 FREQUENCY STABILITY	269
A.5.1 Frequency stability Result	269

A.1 CONDUCTED EMISSION

Test Date	2023/03/13	Temp./Hum.	23°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Ken Yang

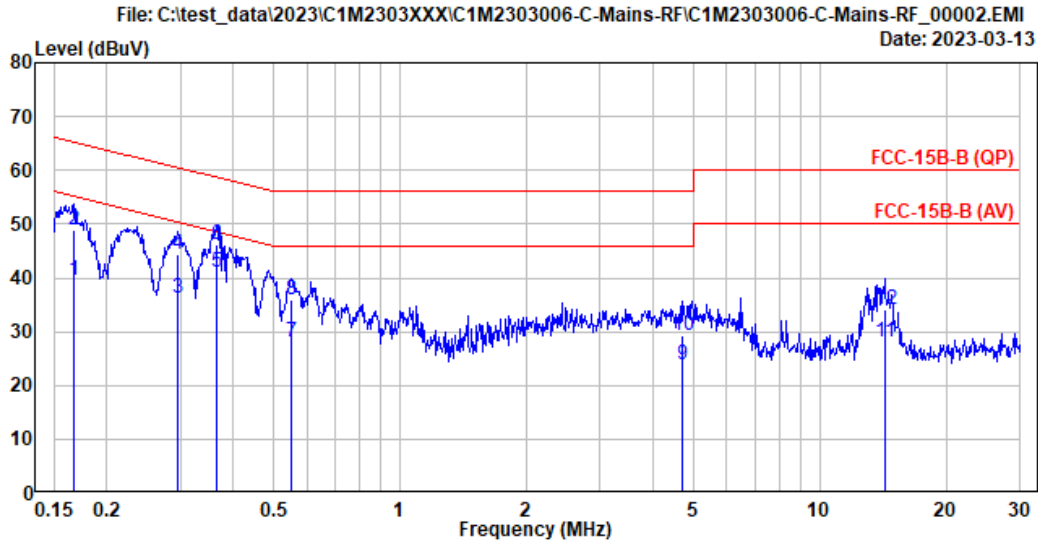


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 23°C/51%	Test Rating	: 120Vac/60Hz
EUT Model	: 16U75R	Engineer	: Ken Yang
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.167	10.33	0.03	9.85	19.23	39.44	55.13	15.69	Average
2	0.167	10.33	0.03	9.85	28.64	48.85	65.13	16.28	QP
3	0.295	10.32	0.03	9.85	16.02	36.22	50.37	14.15	Average
4	0.295	10.32	0.03	9.85	24.25	44.45	60.37	15.92	QP
5	0.364	10.32	0.03	9.85	20.85	41.05	48.63	7.58	Average
6	0.364	10.32	0.03	9.85	25.97	46.17	58.63	12.46	QP
7	0.551	10.33	0.03	9.85	7.89	28.10	46.00	17.90	Average
8	0.551	10.33	0.03	9.85	15.68	35.89	56.00	20.11	QP
9	4.721	10.44	0.09	9.87	3.44	23.84	46.00	22.16	Average
10	4.721	10.44	0.09	9.87	8.94	29.34	56.00	26.66	QP
11	14.275	10.85	0.17	9.91	7.12	28.05	50.00	21.95	Average
12	14.275	10.85	0.17	9.91	13.05	33.98	60.00	26.02	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/03/13	Temp./Hum.	23°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Ken Yang

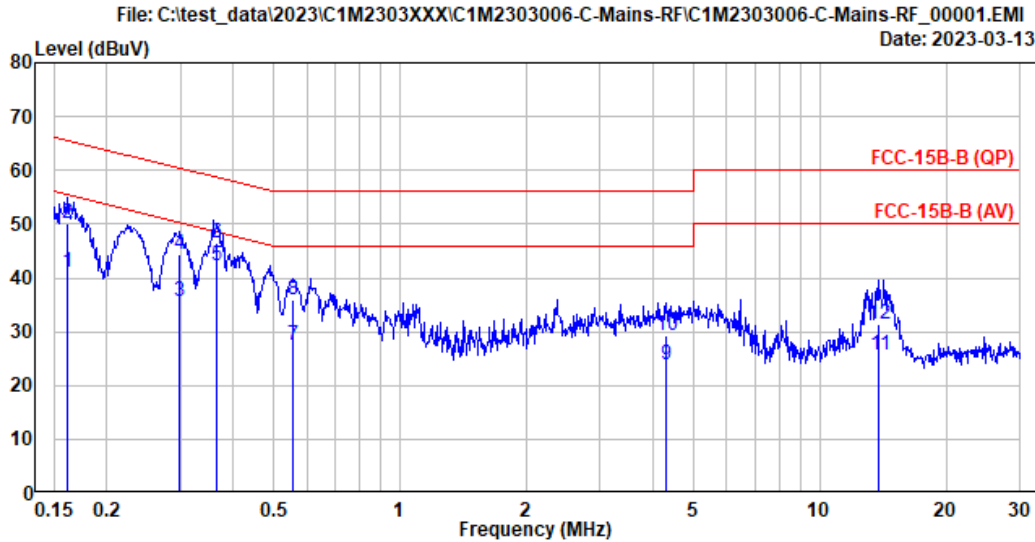

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 23°C/51%	Test Rating	: 120Vac/60Hz
EUT Model	: 16U75R	Engineer	: Ken Yang
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.162	10.22	0.03	9.85	21.00	41.10	55.38	14.28	Average
2	0.162	10.22	0.03	9.85	29.87	49.97	65.38	15.41	QP
3	0.298	10.22	0.03	9.85	15.66	35.76	50.29	14.53	Average
4	0.298	10.22	0.03	9.85	24.42	44.52	60.29	15.77	QP
5	0.366	10.22	0.03	9.85	22.20	42.30	48.59	6.29	Average
6	0.366	10.22	0.03	9.85	26.31	46.41	58.59	12.18	QP
7	0.556	10.22	0.03	9.85	7.47	27.57	46.00	18.43	Average
8	0.556	10.22	0.03	9.85	15.90	36.00	56.00	20.00	QP
9	4.294	10.29	0.08	9.86	3.48	23.71	46.00	22.29	Average
10	4.294	10.29	0.08	9.86	9.14	29.37	56.00	26.63	QP
11	13.855	10.52	0.16	9.91	5.18	25.77	50.00	24.23	Average
12	13.855	10.52	0.16	9.91	10.87	31.46	60.00	28.54	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

A.2 RADIATED EMISSION

Test Date	2023/03/08 ~ 13	Temp./Hum.	20 ~ 22°C/53 ~ 62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	30.67	28.86	40.00	11.14	Peak
101.780	16.96	2.63	26.28	35.64	28.96	43.50	14.54	Peak
250.190	18.49	4.26	25.69	34.52	31.59	46.00	14.41	Peak
299.660	19.30	4.69	25.61	33.74	32.12	46.00	13.88	Peak
485.900	23.25	6.65	27.04	34.13	37.00	46.00	9.00	Peak
540.220	23.86	6.90	27.24	34.28	37.81	46.00	8.19	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.27	1.41	26.49	39.18	37.37	40.00	2.63	Peak
112.450	17.61	2.76	26.21	32.18	26.34	43.50	17.16	Peak
250.190	18.49	4.26	25.69	33.26	30.32	46.00	15.68	Peak
458.740	22.77	6.44	26.86	32.43	34.78	46.00	11.22	Peak
540.220	23.86	6.90	27.24	35.25	38.77	46.00	7.23	Peak
612.970	24.44	7.17	27.40	32.13	36.33	46.00	9.67	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

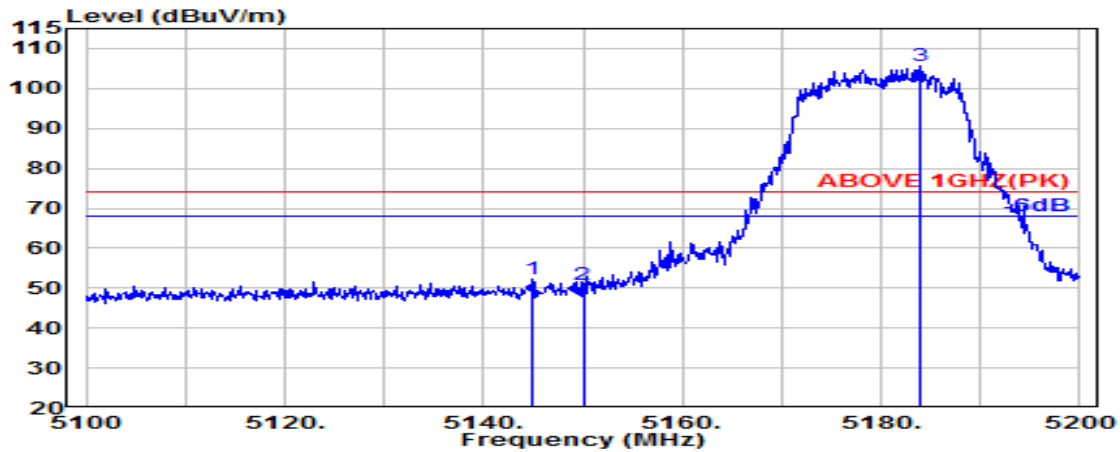

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	34.47	8.88	34.34	43.16	52.17	74.00	21.83	Peak
5150.000	34.50	8.89	34.34	41.90	50.95	74.00	23.05	Peak
@ 5184.000	34.64	8.91	34.32	96.64	105.86	---	---	Peak

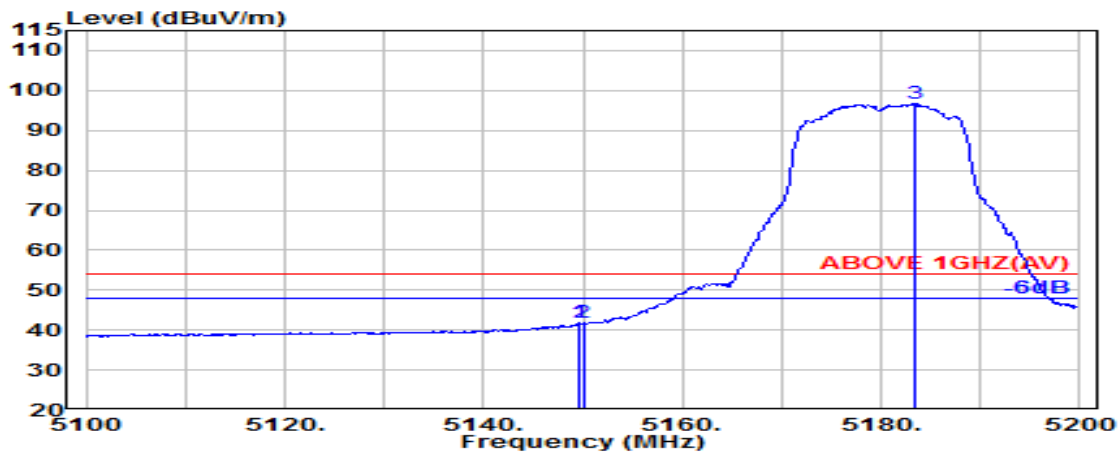


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	32.67	41.71	54.00	12.29	Average
5150.000	34.50	8.89	34.34	32.71	41.76	54.00	12.24	Average
@ 5183.300	34.63	8.90	34.32	87.50	96.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

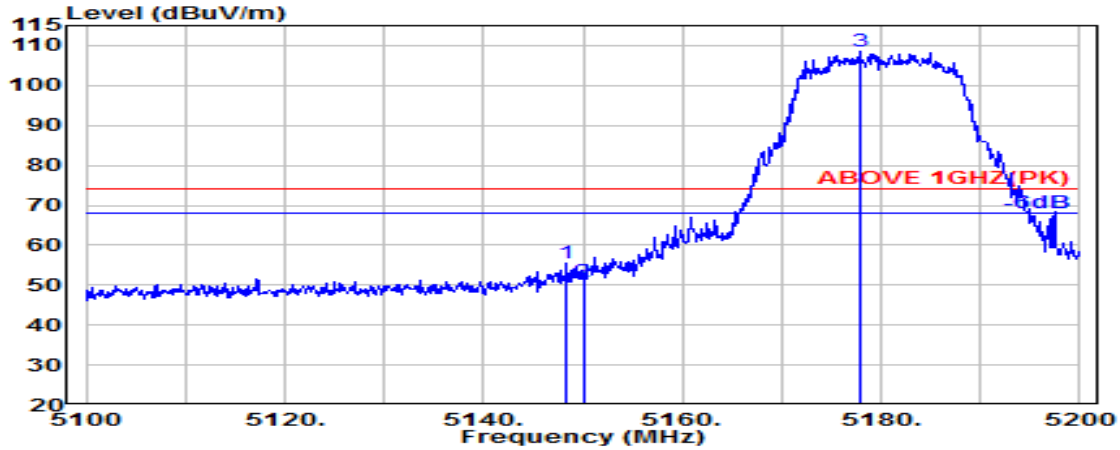

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	34.49	8.88	34.34	46.53	55.57	74.00	18.43	Peak
5150.000	34.50	8.89	34.34	41.71	50.76	74.00	23.24	Peak
@ 5177.800	34.61	8.90	34.33	99.34	108.53	---	---	Peak

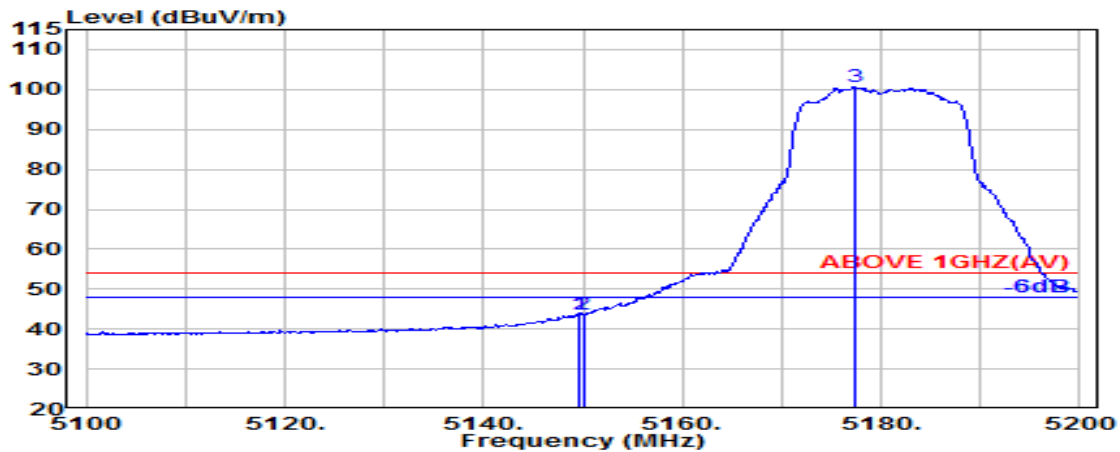


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	34.70	43.74	54.00	10.26	Average
5150.000	34.50	8.89	34.34	34.75	43.80	54.00	10.20	Average
@ 5177.300	34.61	8.90	34.33	91.40	100.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

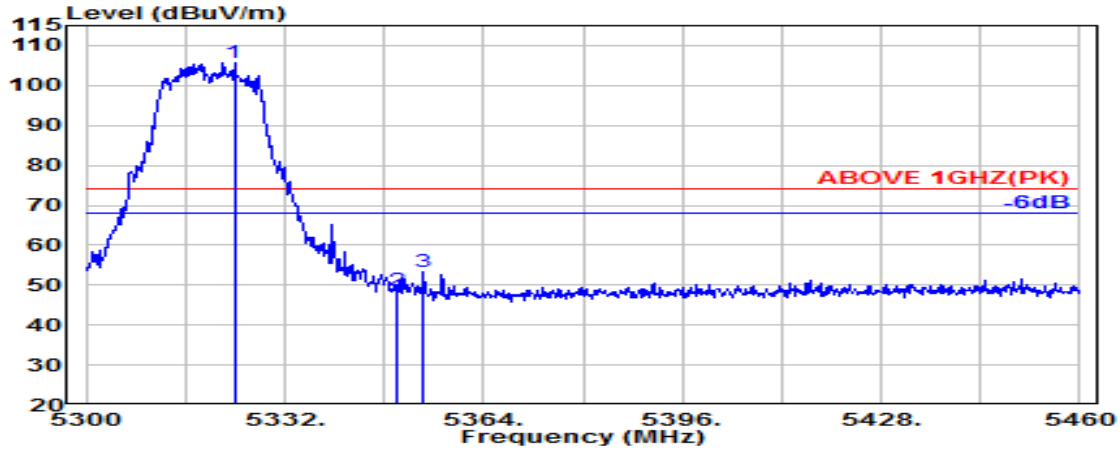

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	34.64	8.98	34.27	96.49	105.84	---	---	Peak
5350.000	34.90	9.00	34.26	39.20	48.84	74.00	25.16	Peak
5354.400	34.89	9.00	34.26	43.64	53.27	74.00	20.73	Peak

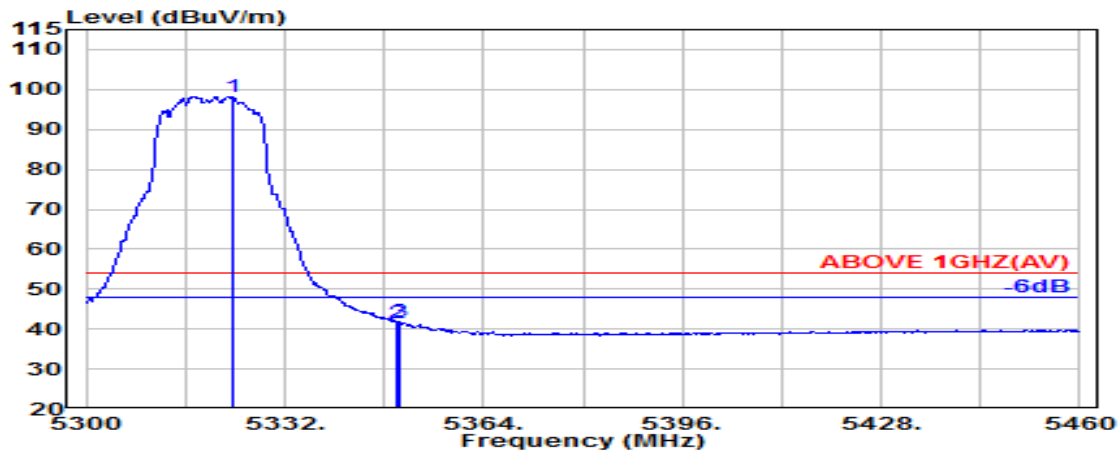


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	34.64	8.98	34.27	88.95	98.30	---	---	Average
5350.000	34.90	9.00	34.26	32.04	41.67	54.00	12.33	Average
5350.400	34.90	9.00	34.26	32.21	41.84	54.00	12.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

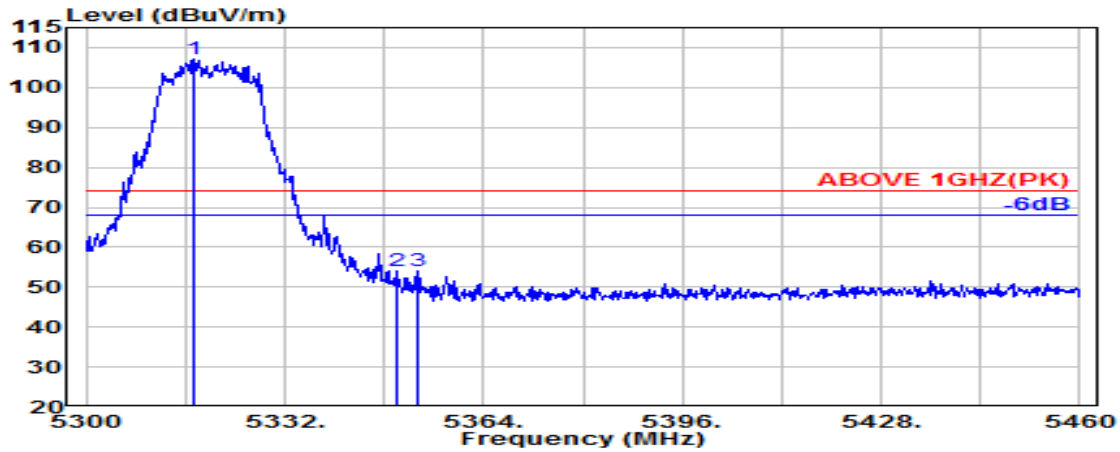

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.280	34.57	8.98	34.27	97.87	107.15	---	---	Peak
5350.000	34.90	9.00	34.26	44.45	54.09	74.00	19.91	Peak
5353.280	34.89	9.00	34.26	44.56	54.19	74.00	19.81	Peak

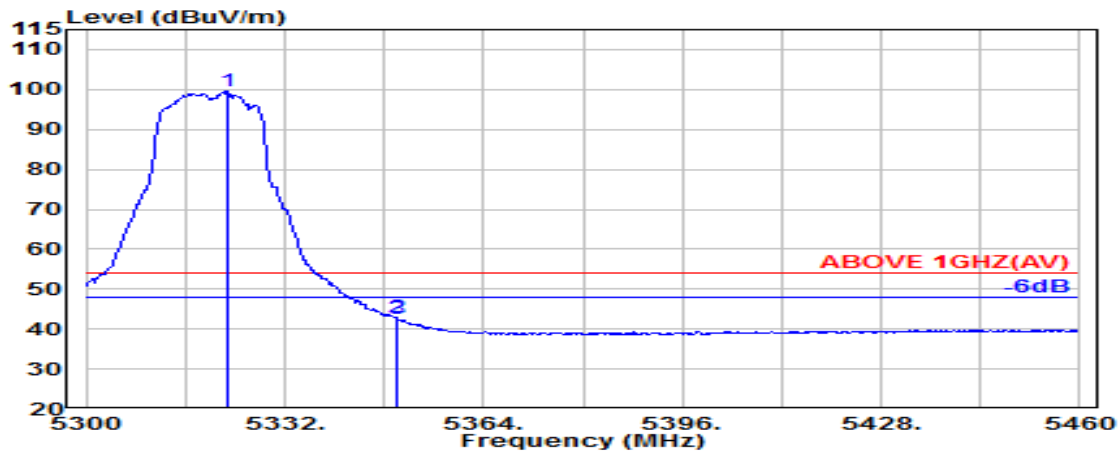


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	34.63	8.98	34.27	90.12	99.46	---	---	Average
5350.000	34.90	9.00	34.26	33.25	42.89	54.00	11.11	Average
5350.240	34.90	9.00	34.26	32.93	42.57	54.00	11.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

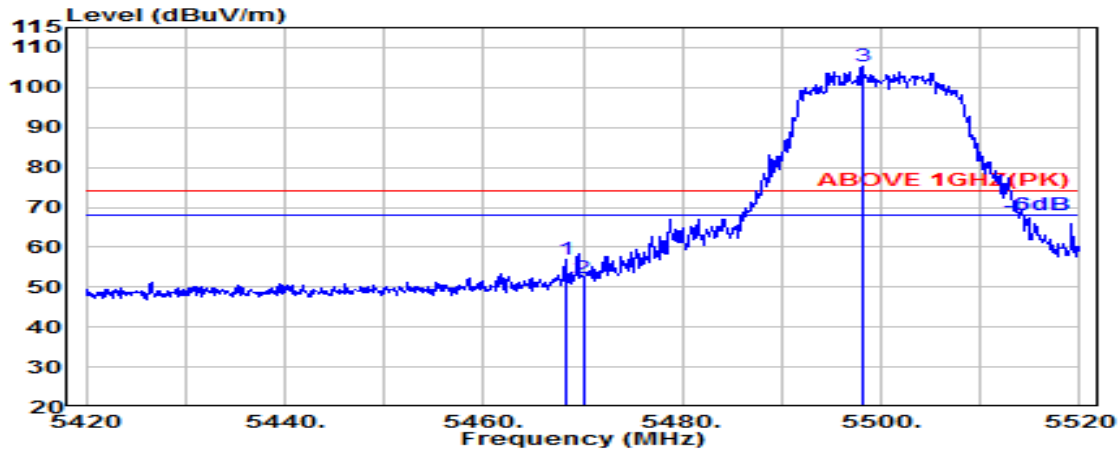

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.64	9.06	34.21	47.28	56.76	74.00	17.24	Peak
5470.000	34.64	9.06	34.21	42.93	52.42	74.00	21.58	Peak
@ 5498.100	34.70	9.08	34.20	95.66	105.23	---	---	Peak

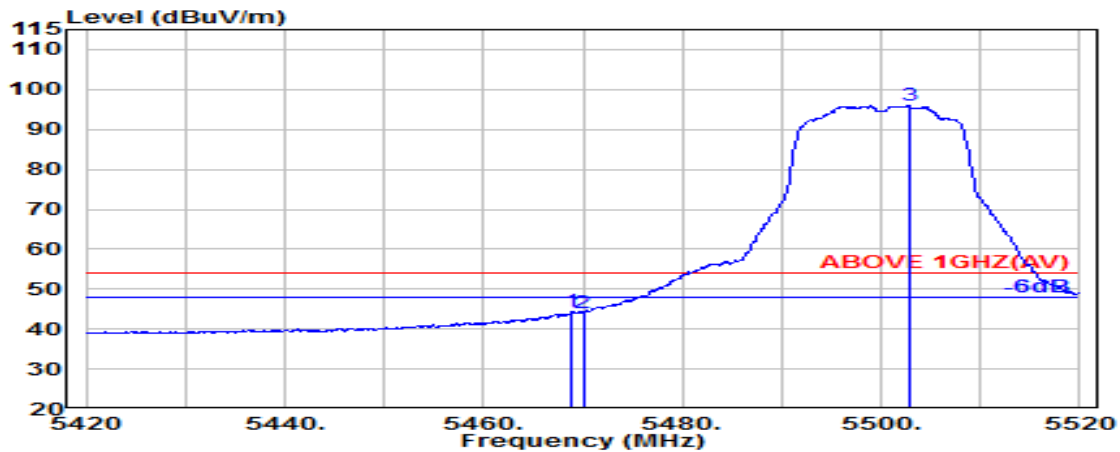


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.64	9.06	34.21	34.76	44.25	54.00	9.75	Average
5470.000	34.64	9.06	34.21	34.65	44.14	54.00	9.86	Average
@ 5502.800	34.70	9.08	34.20	86.34	95.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

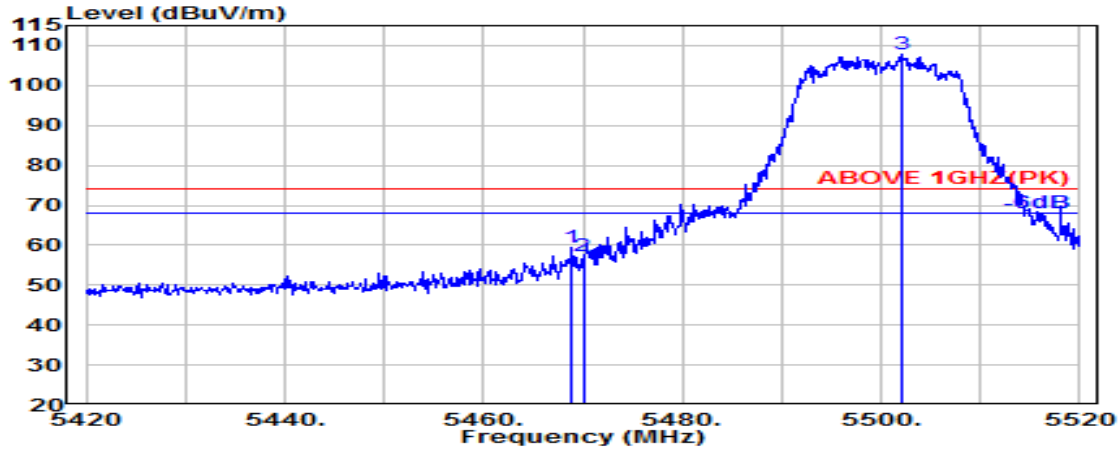

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.64	9.06	34.21	50.11	59.59	74.00	14.41	Peak
5470.000	34.64	9.06	34.21	47.78	57.27	74.00	16.73	Peak
@ 5502.200	34.70	9.08	34.20	98.19	107.76	---	---	Peak

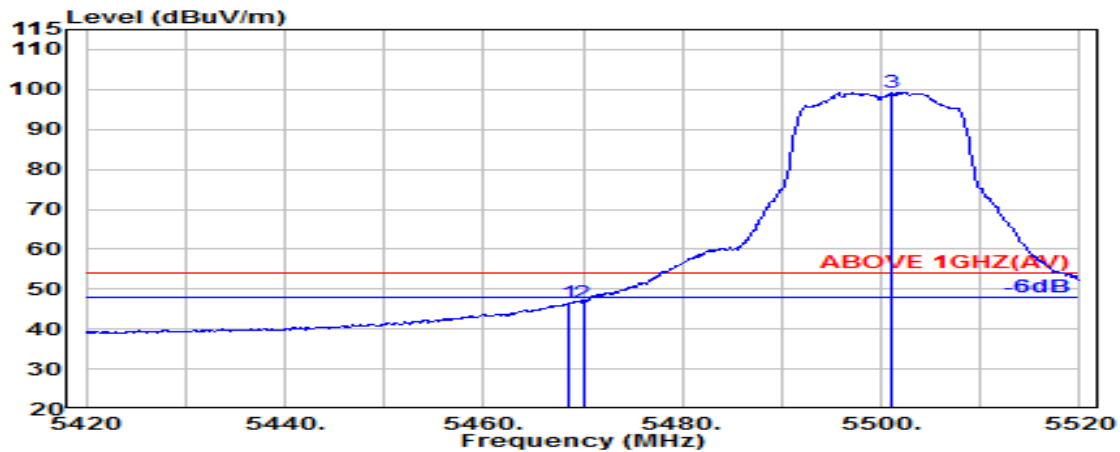


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.500	34.64	9.06	34.21	37.12	46.61	54.00	7.39	Average
5470.000	34.64	9.06	34.21	37.17	46.66	54.00	7.34	Average
@ 5501.100	34.70	9.08	34.20	89.62	99.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

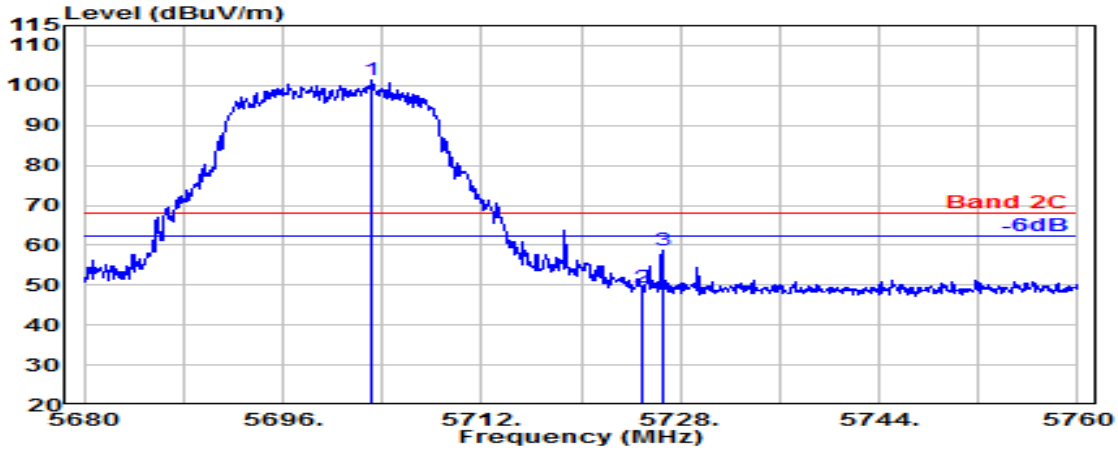

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.200	34.72	9.18	34.30	91.79	101.39	---	---	Peak
5725.000	34.85	9.19	34.31	39.73	49.47	68.20	18.73	Peak
5726.560	34.86	9.19	34.31	48.81	58.56	68.20	9.64	Peak

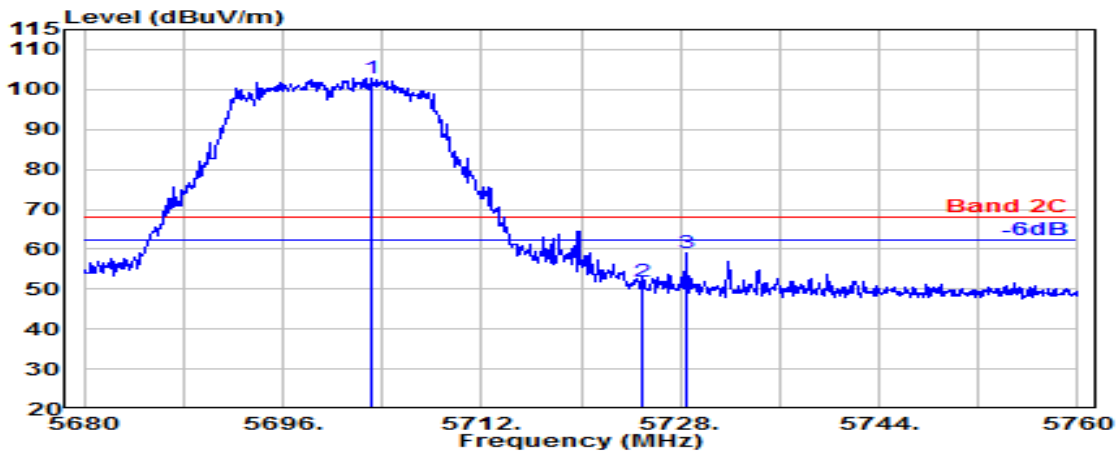


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.120	34.72	9.18	34.30	93.17	102.77	---	---	Peak
5725.000	34.85	9.19	34.31	42.33	52.07	68.20	16.13	Peak
5728.400	34.87	9.20	34.31	49.20	58.96	68.20	9.24	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

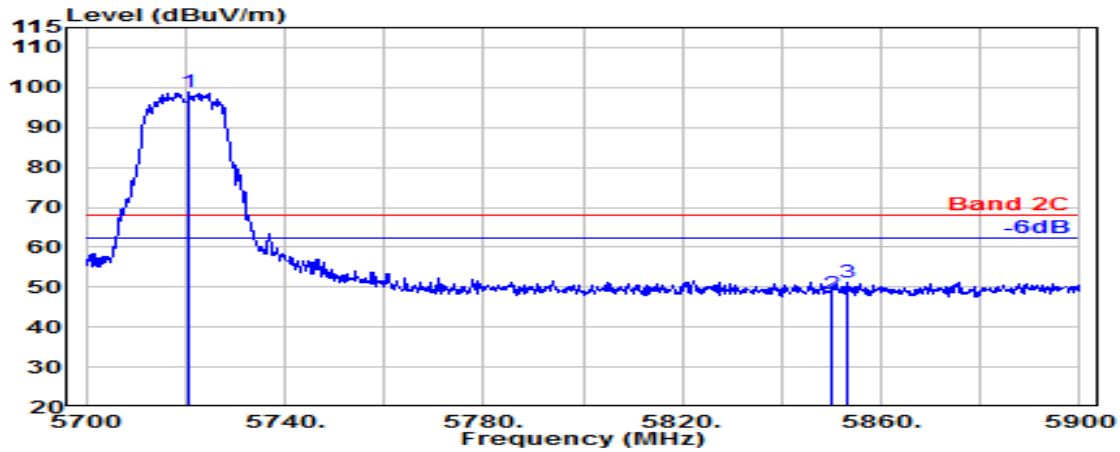

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.800	34.83	9.19	34.30	89.04	98.76	---	---	Peak
5850.000	35.40	9.26	34.36	38.10	48.40	68.20	19.80	Peak
5853.400	35.43	9.26	34.36	40.87	51.19	68.20	17.01	Peak

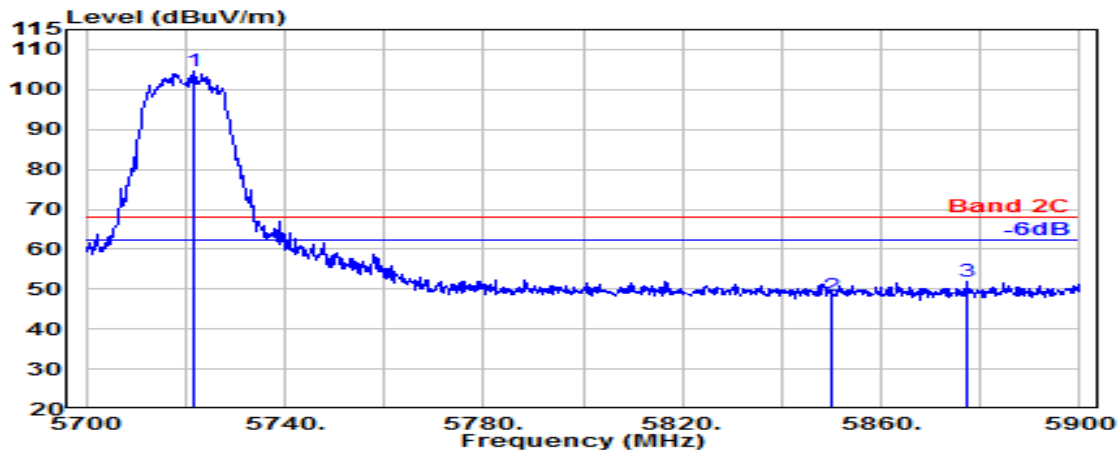


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.600	34.83	9.19	34.30	95.04	104.76	---	---	Peak
5850.000	35.40	9.26	34.36	38.15	48.45	68.20	19.75	Peak
5877.200	35.62	9.27	34.38	41.35	51.86	68.20	16.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

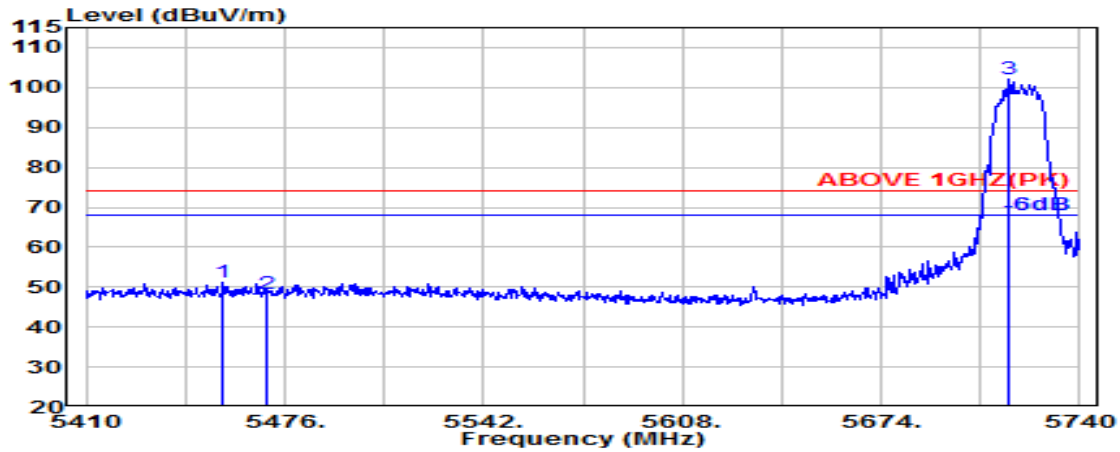

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.210	34.61	9.05	34.22	41.57	51.01	74.00	22.99	Peak
5470.000	34.64	9.06	34.21	38.87	48.36	74.00	25.64	Peak
@ 5716.570	34.80	9.19	34.30	92.32	102.01	---	---	Peak

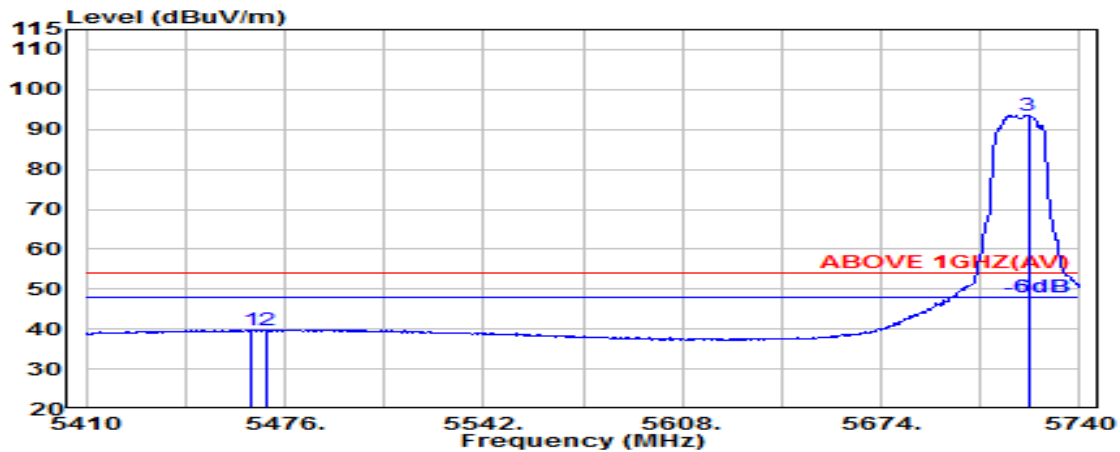


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.110	34.63	9.06	34.21	30.31	39.79	54.00	14.21	Average
5470.000	34.64	9.06	34.21	30.08	39.57	54.00	14.43	Average
@ 5722.840	34.84	9.19	34.30	83.92	93.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

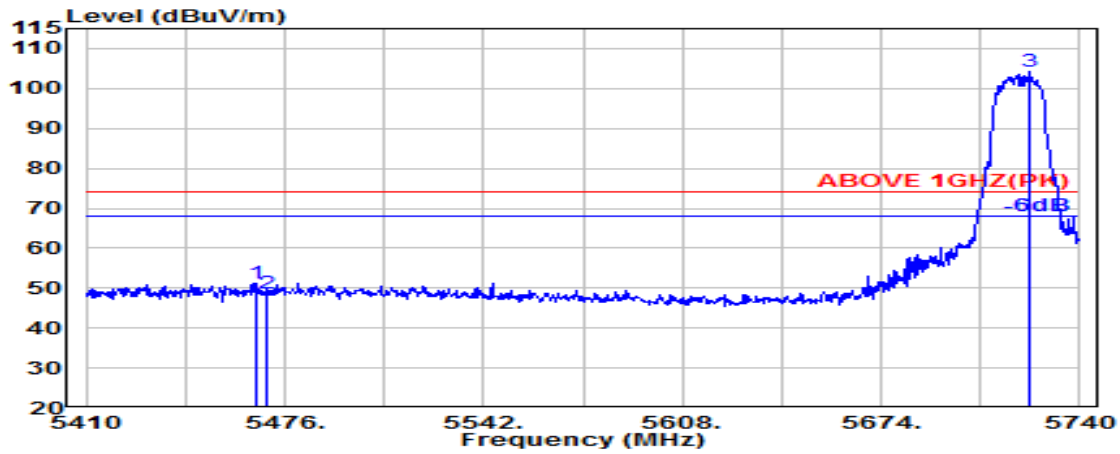

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.430	34.63	9.06	34.21	41.79	51.26	74.00	22.74	Peak
5470.000	34.64	9.06	34.21	39.30	48.79	74.00	25.21	Peak
@ 5723.500	34.84	9.19	34.31	94.62	104.35	---	---	Peak

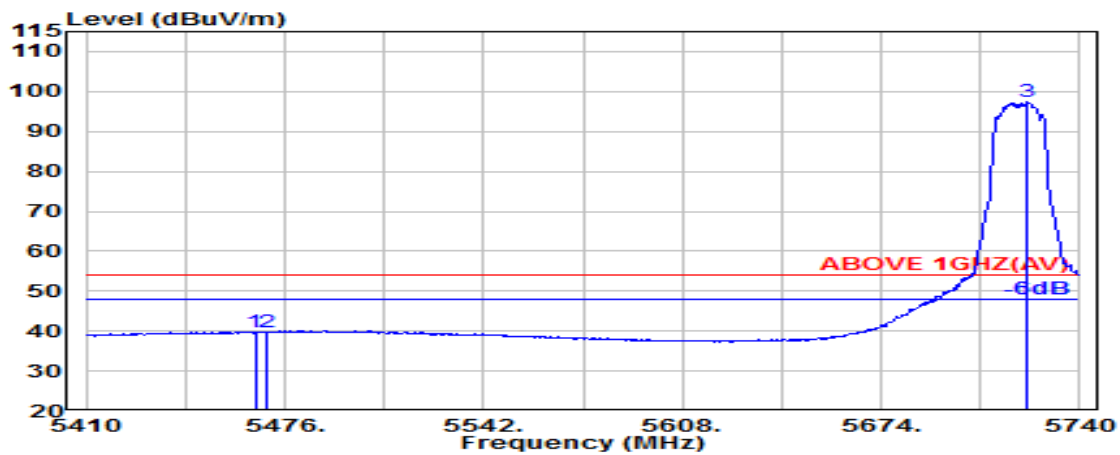


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.63	9.06	34.21	30.32	39.79	54.00	14.21	Average
5470.000	34.64	9.06	34.21	30.38	39.87	54.00	14.13	Average
@ 5722.510	34.84	9.19	34.30	87.58	97.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

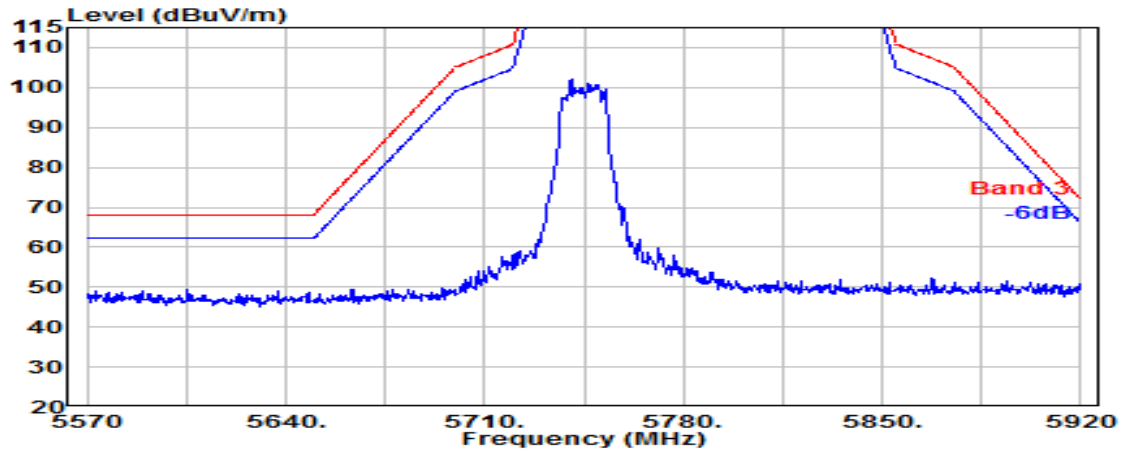


Antenna at Vertical Polarization

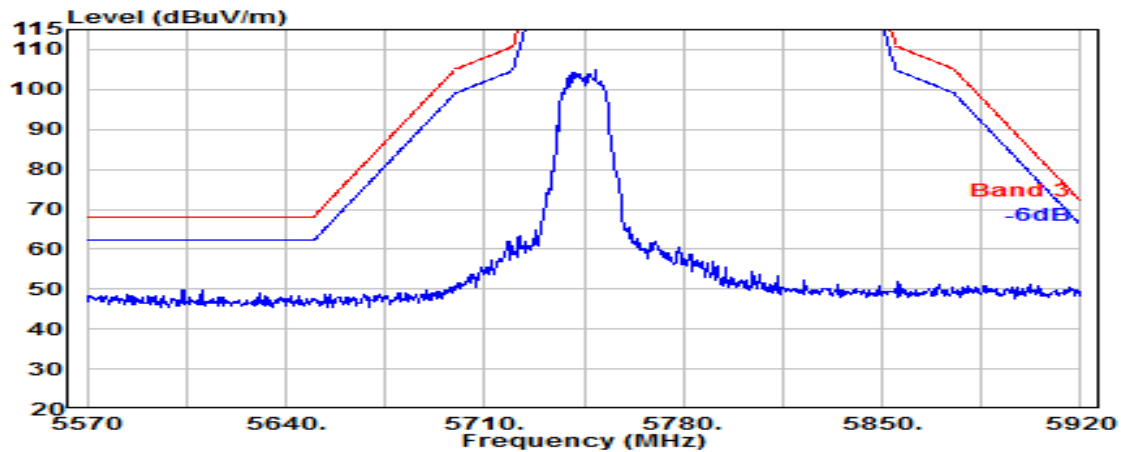


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

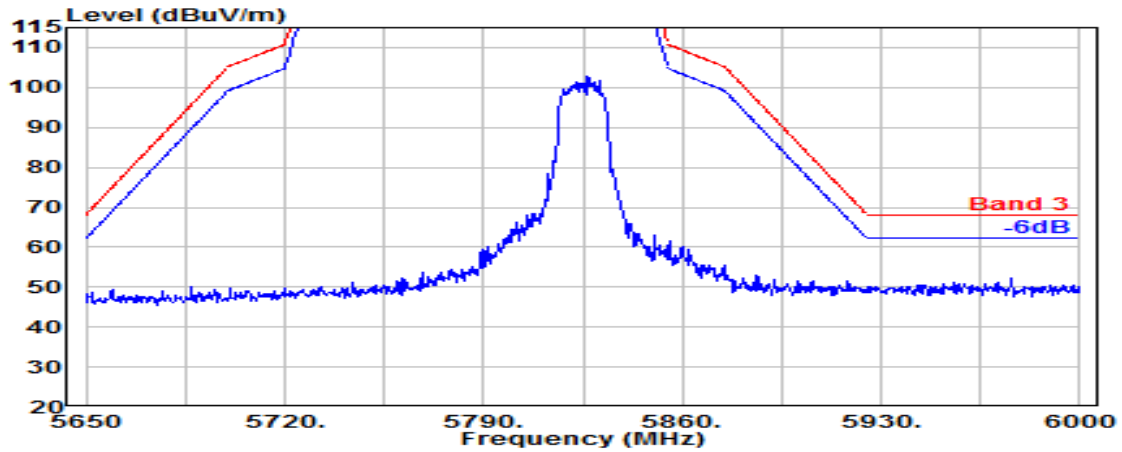

Antenna at Vertical Polarization

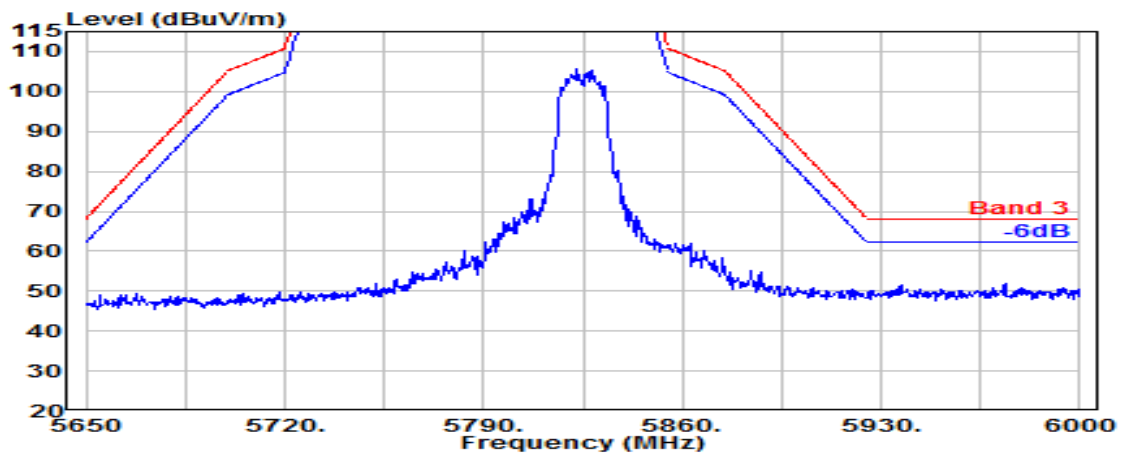


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

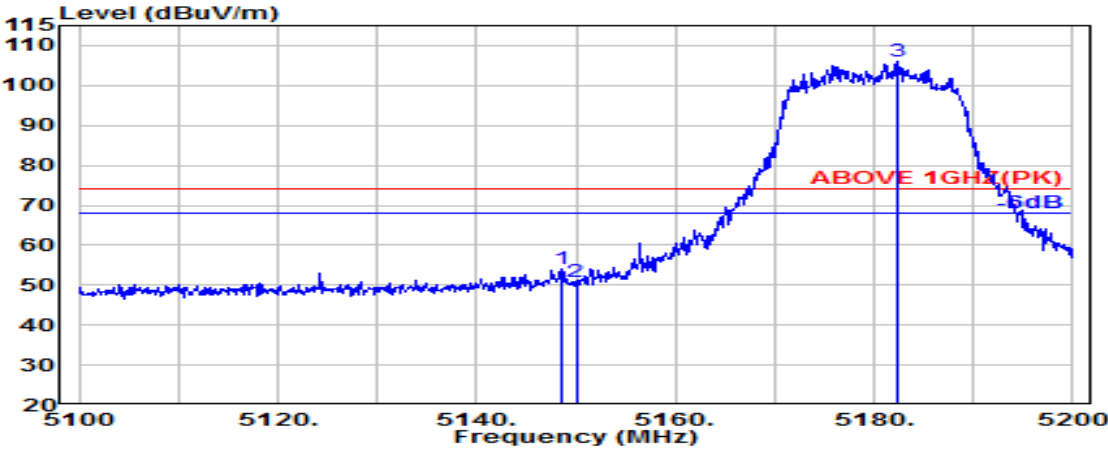

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.49	8.89	34.34	45.10	54.14	74.00	19.86	Peak
5150.000	34.50	8.89	34.34	41.94	50.98	74.00	23.02	Peak
@ 5182.400	34.63	8.90	34.32	96.90	106.11	---	---	Peak

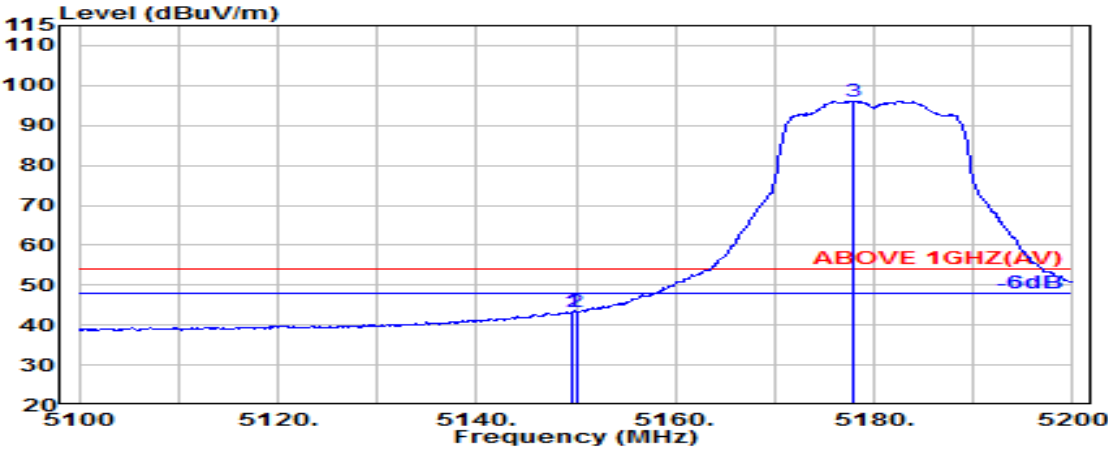


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	34.18	43.23	54.00	10.77	Average
5150.000	34.50	8.89	34.34	34.27	43.32	54.00	10.68	Average
@ 5178.000	34.61	8.90	34.33	86.94	96.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

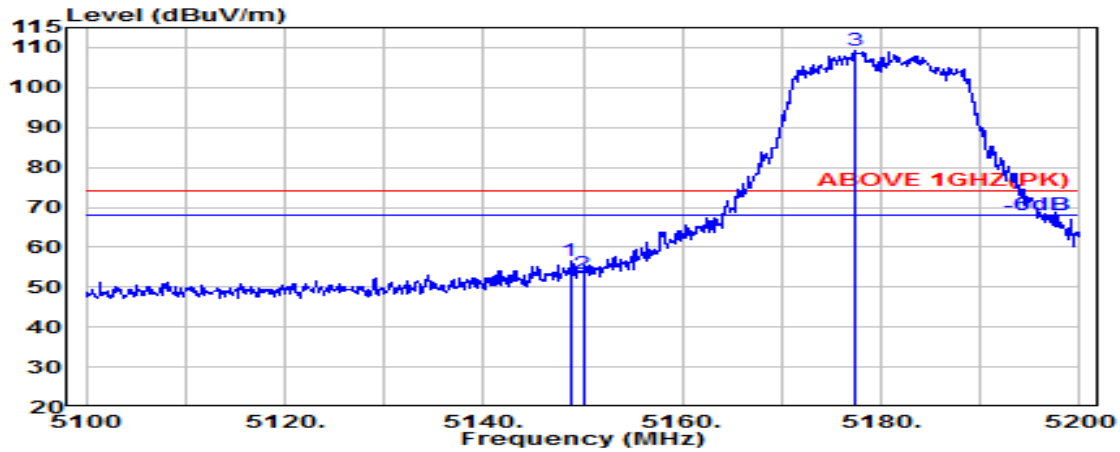

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.700	34.49	8.89	34.34	47.51	56.55	74.00	17.45	Peak
5150.000	34.50	8.89	34.34	44.21	53.26	74.00	20.74	Peak
@ 5177.500	34.61	8.90	34.33	100.16	109.34	---	---	Peak

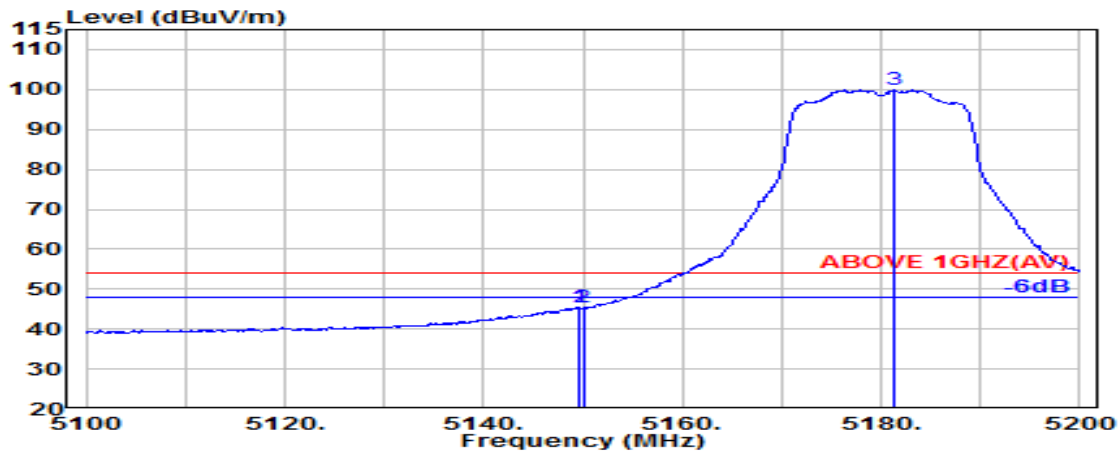


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	34.50	8.89	34.34	36.25	45.29	54.00	8.71	Average
5150.000	34.50	8.89	34.34	36.26	45.31	54.00	8.69	Average
@ 5181.300	34.63	8.90	34.33	90.73	99.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

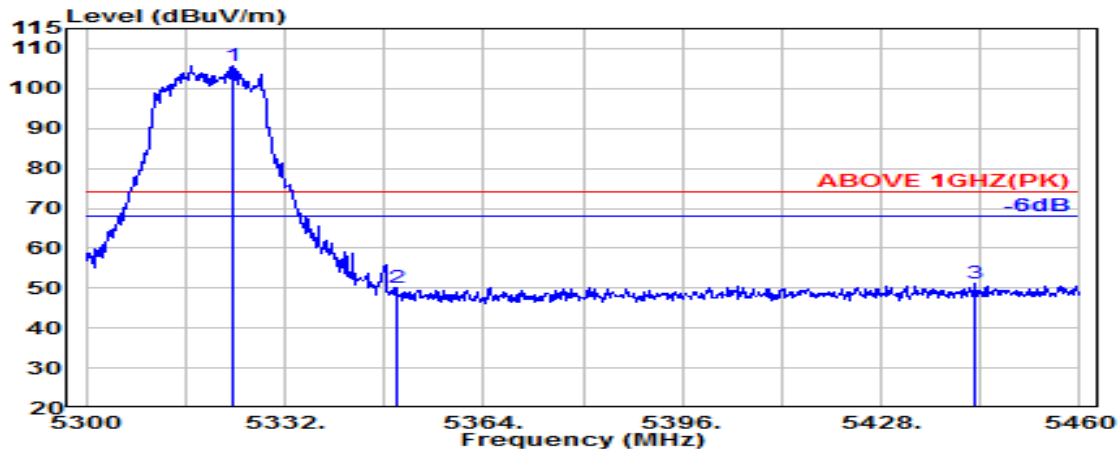

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.520	34.64	8.98	34.27	96.23	105.58	---	---	Peak
5350.000	34.90	9.00	34.26	40.62	50.26	74.00	23.74	Peak
5443.040	34.63	9.05	34.22	41.57	51.02	74.00	22.98	Peak

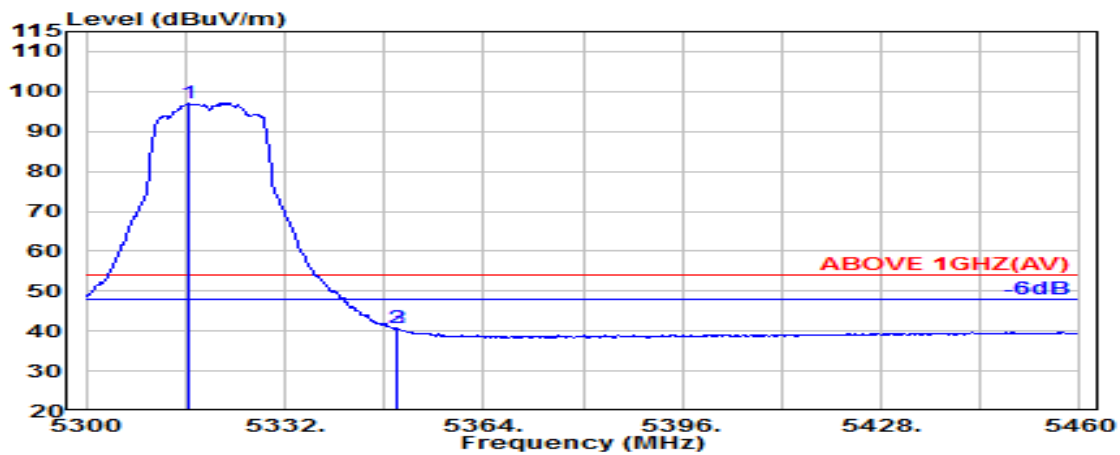


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.640	34.57	8.98	34.27	87.84	97.11	---	---	Average
5350.000	34.90	9.00	34.26	31.15	40.79	54.00	13.21	Average
5350.240	34.90	9.00	34.26	31.02	40.66	54.00	13.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

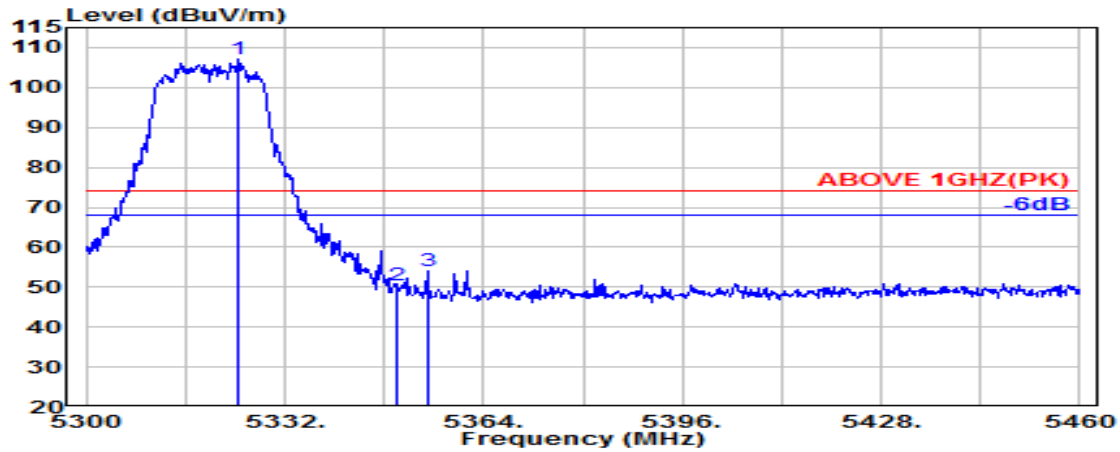

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.320	34.64	8.98	34.27	97.85	107.21	---	---	Peak
5350.000	34.90	9.00	34.26	40.96	50.60	74.00	23.40	Peak
5354.880	34.89	9.00	34.26	44.51	54.15	74.00	19.85	Peak

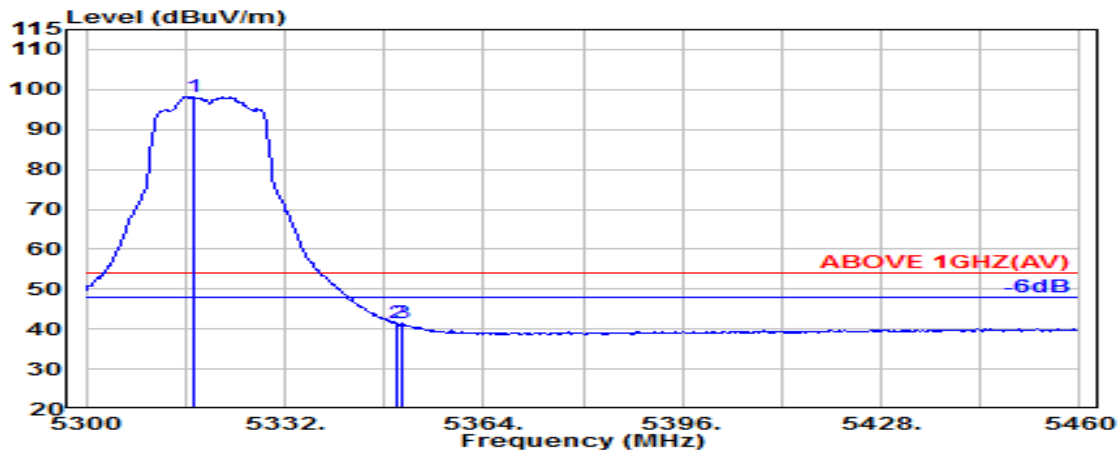


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.280	34.57	8.98	34.27	89.02	98.30	---	---	Average
5350.000	34.90	9.00	34.26	31.78	41.41	54.00	12.59	Average
5351.040	34.90	9.00	34.26	31.70	41.34	54.00	12.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

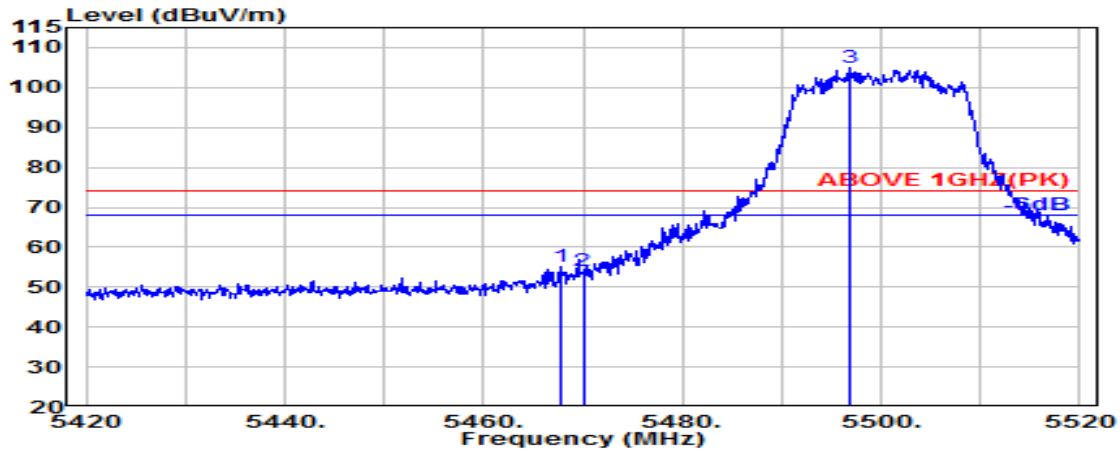

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.64	9.06	34.21	45.66	55.15	74.00	18.85	Peak
5470.000	34.64	9.06	34.21	44.56	54.05	74.00	19.95	Peak
@ 5496.900	34.69	9.08	34.20	95.55	105.11	---	---	Peak

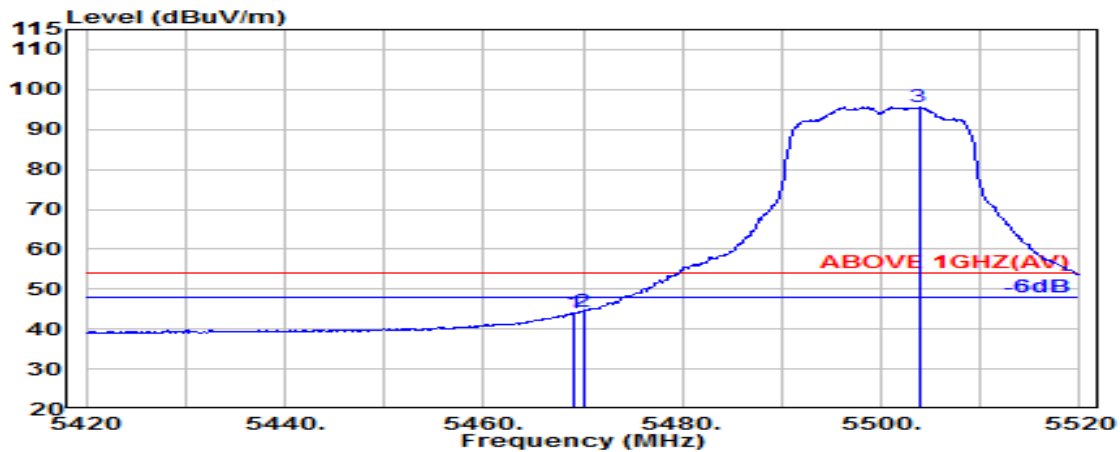


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.64	9.06	34.21	34.45	43.94	54.00	10.06	Average
5470.000	34.64	9.06	34.21	34.90	44.39	54.00	9.61	Average
@ 5503.800	34.70	9.08	34.20	86.07	95.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

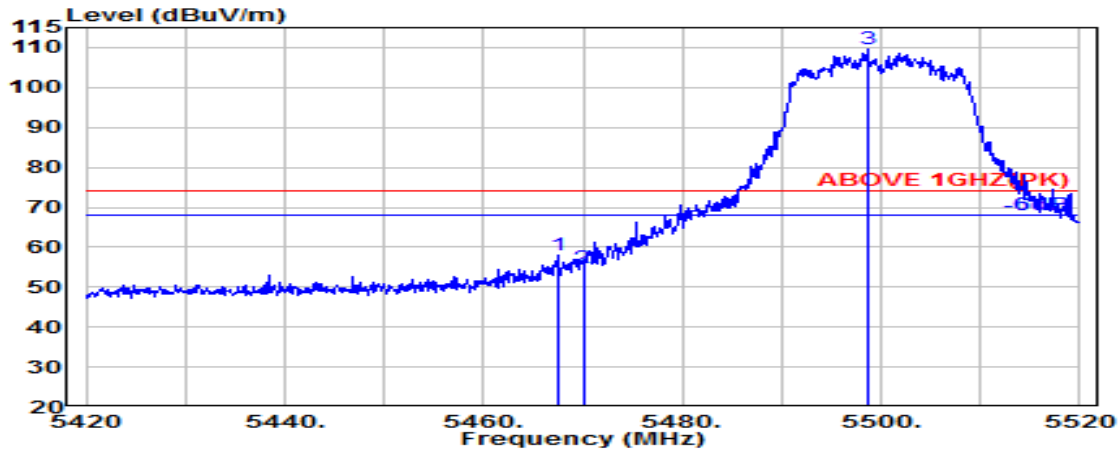

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.63	9.06	34.21	48.64	58.12	74.00	15.88	Peak
5470.000	34.64	9.06	34.21	45.46	54.95	74.00	19.05	Peak
@ 5498.600	34.70	9.08	34.20	100.14	109.72	---	---	Peak

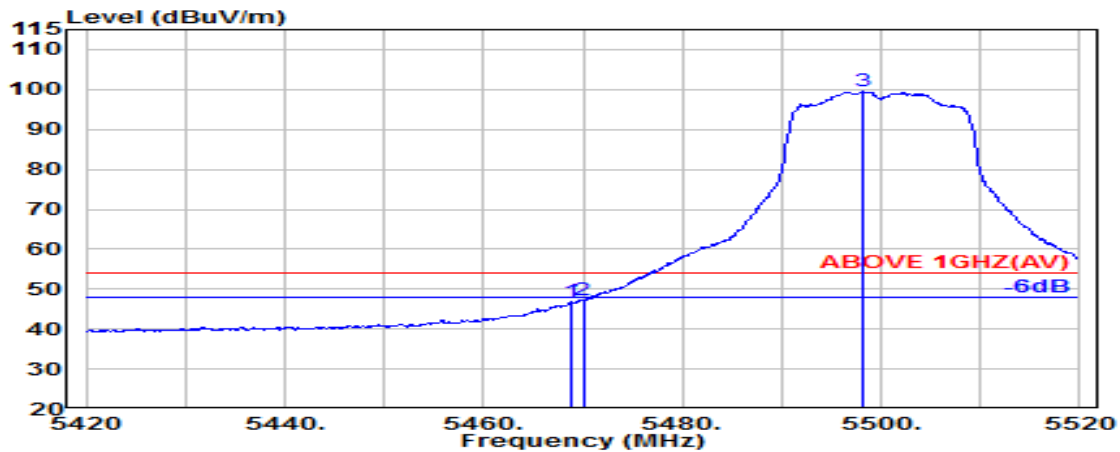


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.64	9.06	34.21	37.35	46.84	54.00	7.16	Average
5470.000	34.64	9.06	34.21	37.82	47.31	54.00	6.69	Average
@ 5498.200	34.70	9.08	34.20	89.95	99.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

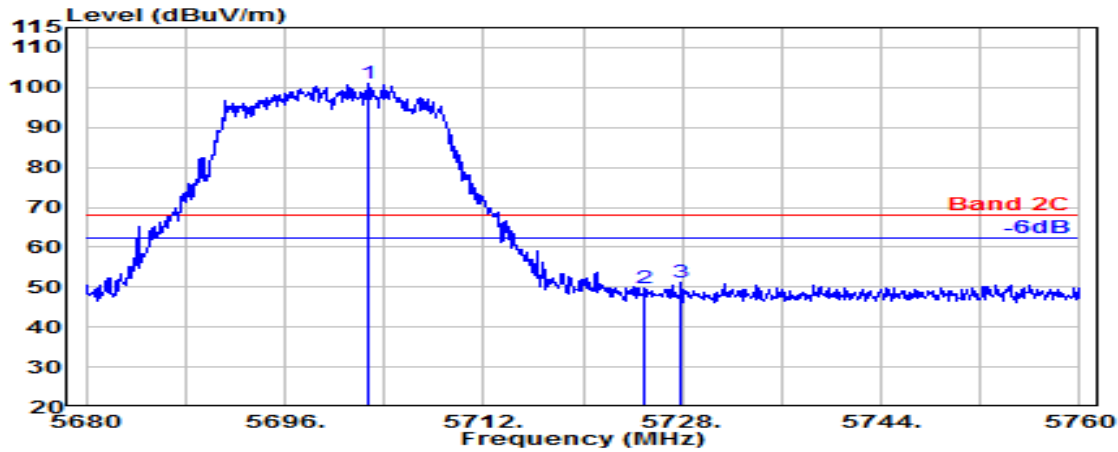

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.720	34.72	9.18	34.30	91.33	100.94	---	---	Peak
5725.000	34.85	9.19	34.31	39.89	49.63	68.20	18.57	Peak
5727.840	34.87	9.20	34.31	41.42	51.17	68.20	17.03	Peak

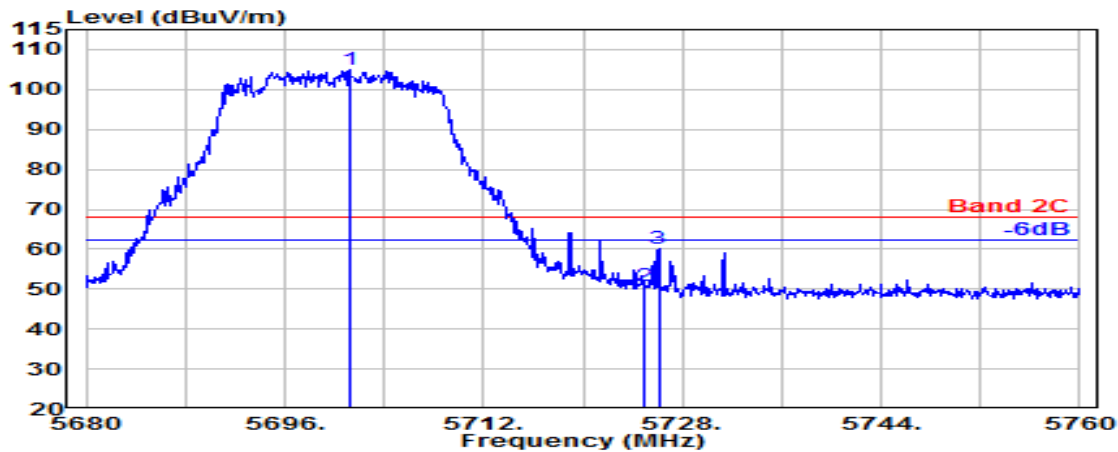


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.200	34.71	9.18	34.29	95.31	104.90	---	---	Peak
5725.000	34.85	9.19	34.31	41.15	50.89	68.20	17.31	Peak
5726.080	34.86	9.19	34.31	50.49	60.23	68.20	7.97	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

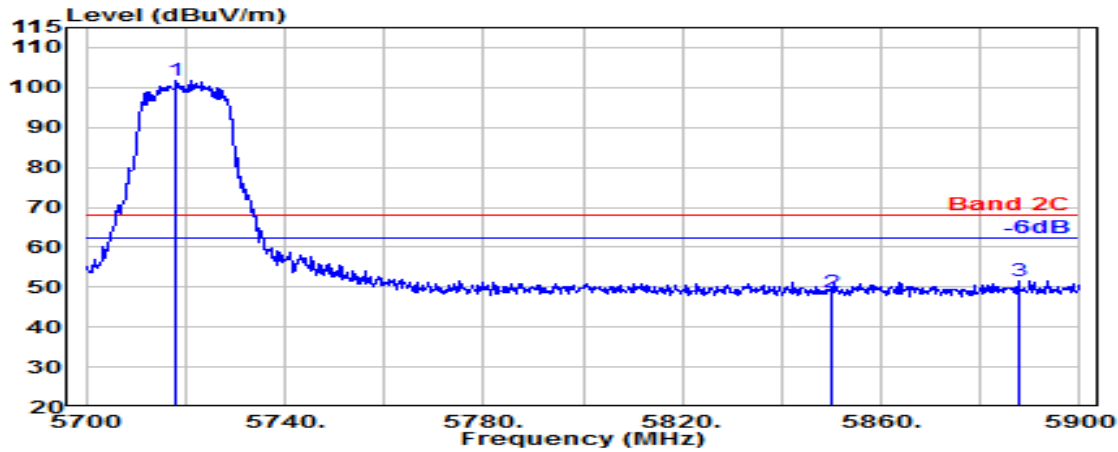

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.200	34.81	9.19	34.30	92.19	101.89	---	---	Peak
5850.000	35.40	9.26	34.36	38.42	48.71	68.20	19.49	Peak
5887.600	35.70	9.28	34.38	41.06	51.66	68.20	16.54	Peak

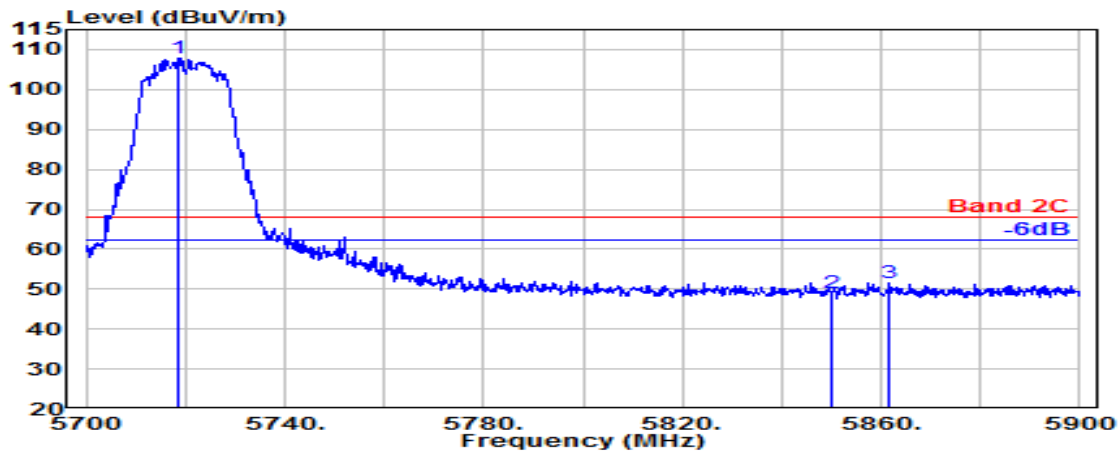


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.600	34.81	9.19	34.30	98.30	108.00	---	---	Peak
5850.000	35.40	9.26	34.36	38.68	48.97	68.20	19.23	Peak
5861.800	35.49	9.26	34.37	41.09	51.48	68.20	16.72	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

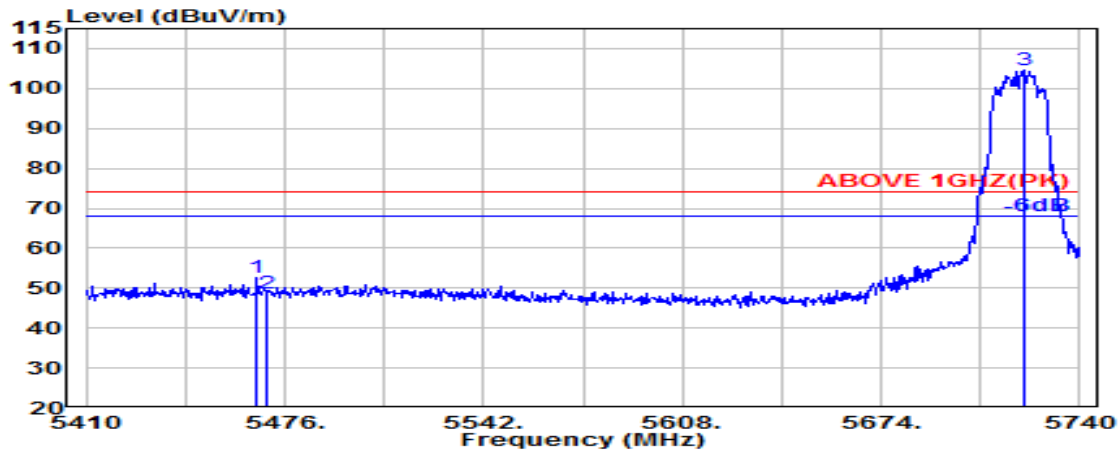

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.760	34.63	9.06	34.21	43.27	52.75	74.00	21.25	Peak
5470.000	34.64	9.06	34.21	39.16	48.65	74.00	25.35	Peak
@ 5721.520	34.83	9.19	34.30	94.79	104.51	---	---	Peak

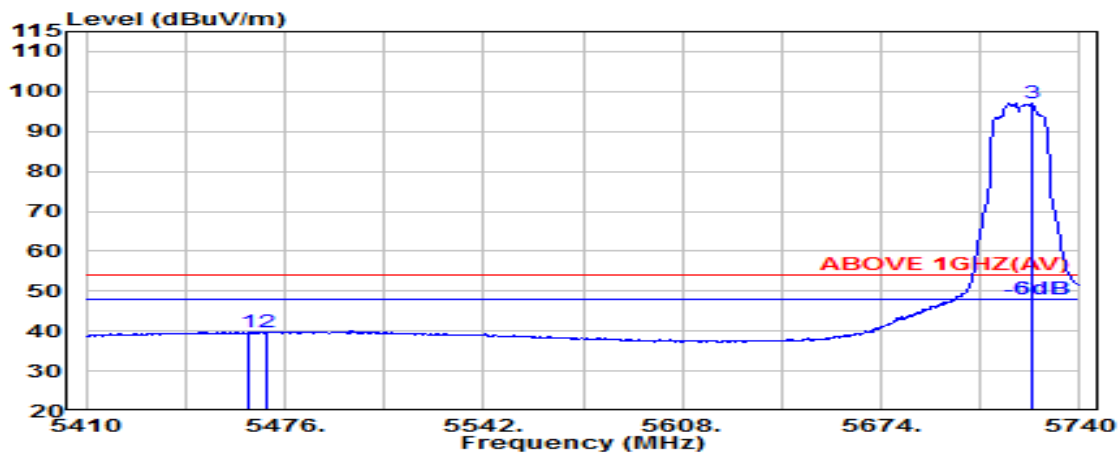


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.790	34.63	9.06	34.21	30.24	39.71	54.00	14.29	Average
5470.000	34.64	9.06	34.21	30.16	39.65	54.00	14.35	Average
@ 5724.160	34.85	9.19	34.31	87.34	97.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

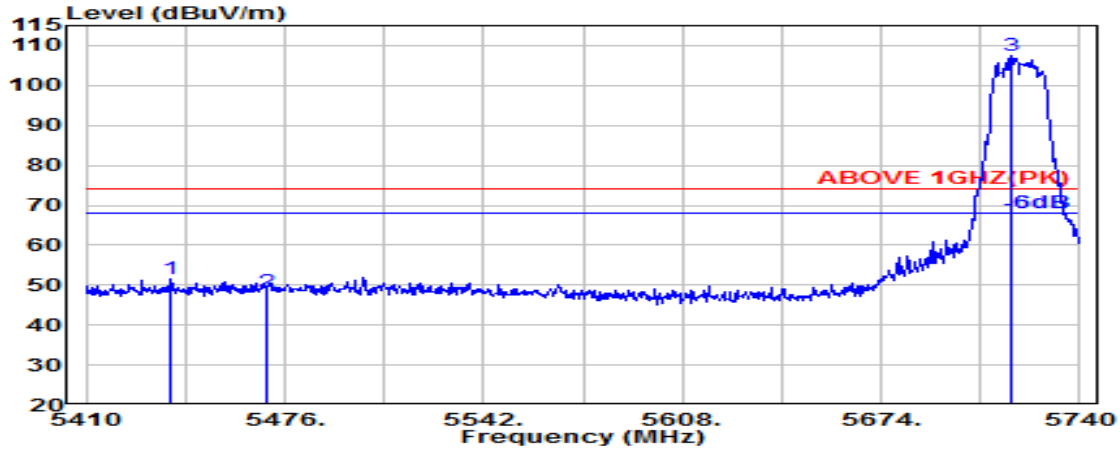

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.380	34.65	9.04	34.22	42.07	51.54	74.00	22.46	Peak
5470.000	34.64	9.06	34.21	38.97	48.46	74.00	25.54	Peak
@ 5716.900	34.80	9.19	34.30	97.74	107.43	---	---	Peak

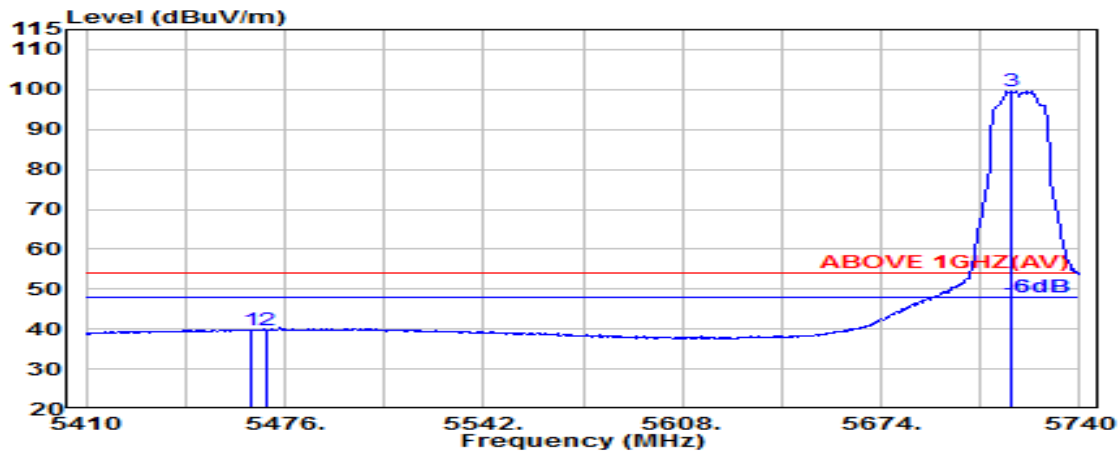


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.780	34.63	9.06	34.21	30.37	39.85	54.00	14.15	Average
5470.000	34.64	9.06	34.21	30.40	39.89	54.00	14.11	Average
@ 5717.560	34.81	9.19	34.30	89.90	99.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

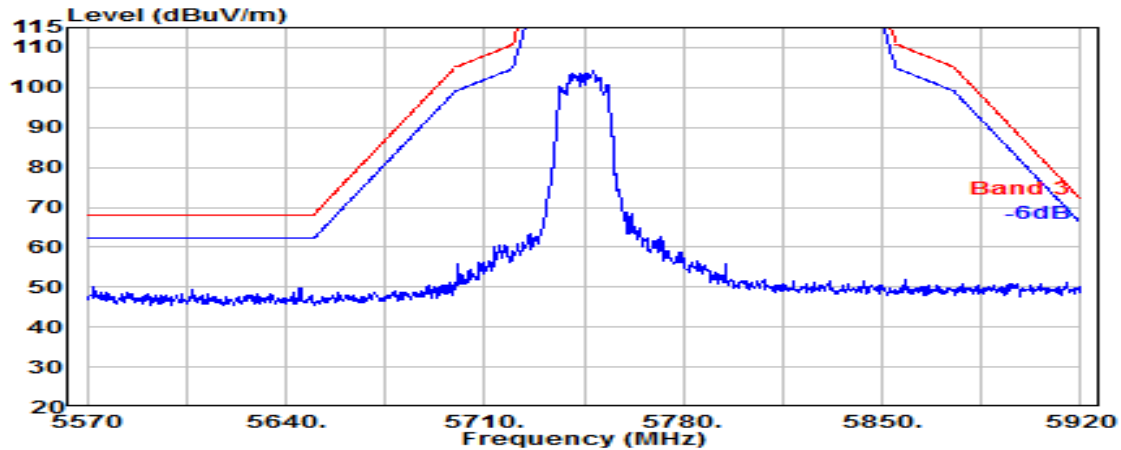


Antenna at Vertical Polarization

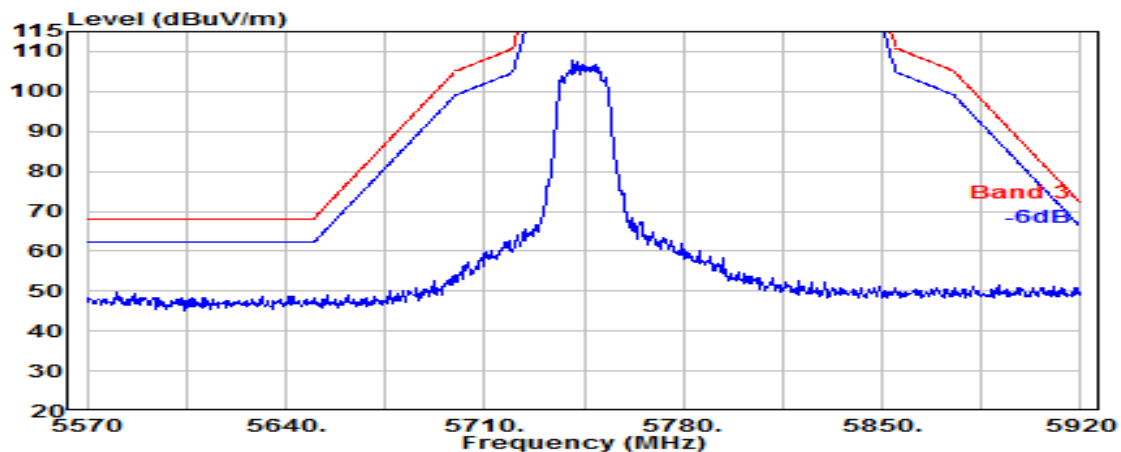


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

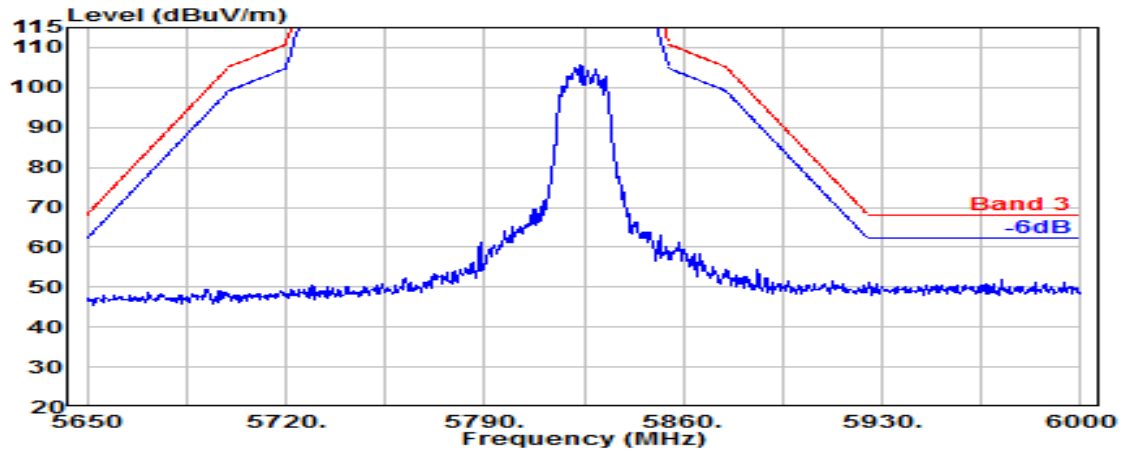

Antenna at Vertical Polarization

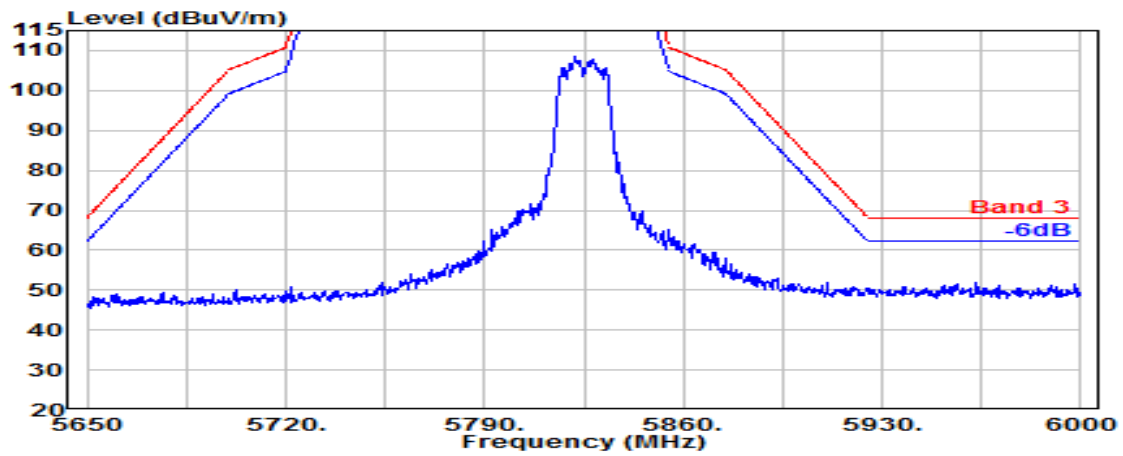


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

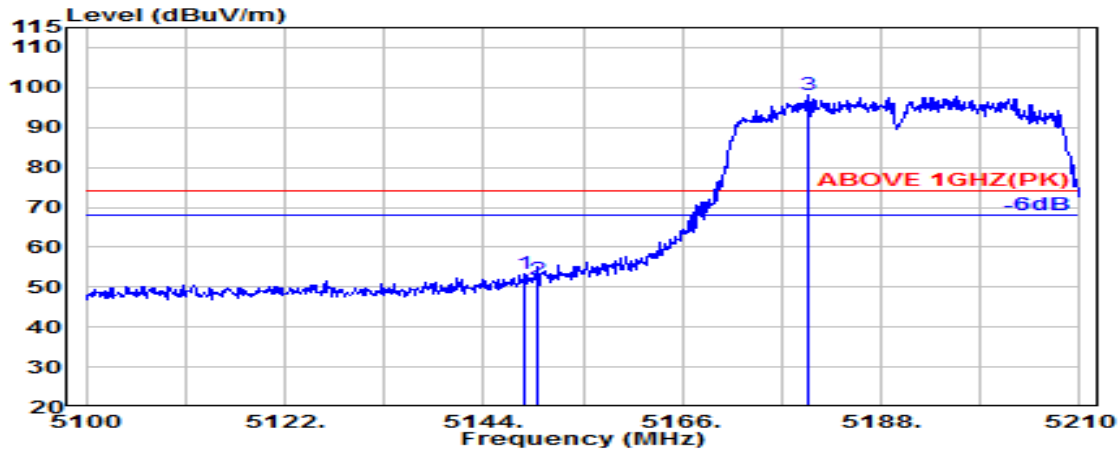

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.620	34.49	8.89	34.34	44.17	53.21	74.00	20.79	Peak
5150.000	34.50	8.89	34.34	43.01	52.06	74.00	21.94	Peak
@ 5179.860	34.62	8.90	34.33	88.95	98.14	---	---	Peak

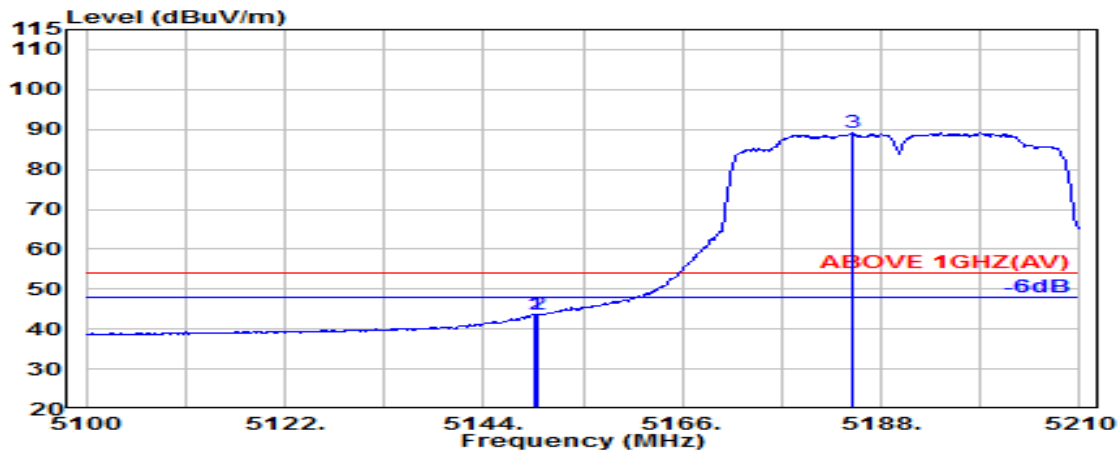


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.50	8.89	34.34	34.62	43.67	54.00	10.33	Average
5150.000	34.50	8.89	34.34	34.69	43.74	54.00	10.26	Average
@ 5184.920	34.64	8.91	34.32	79.85	89.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

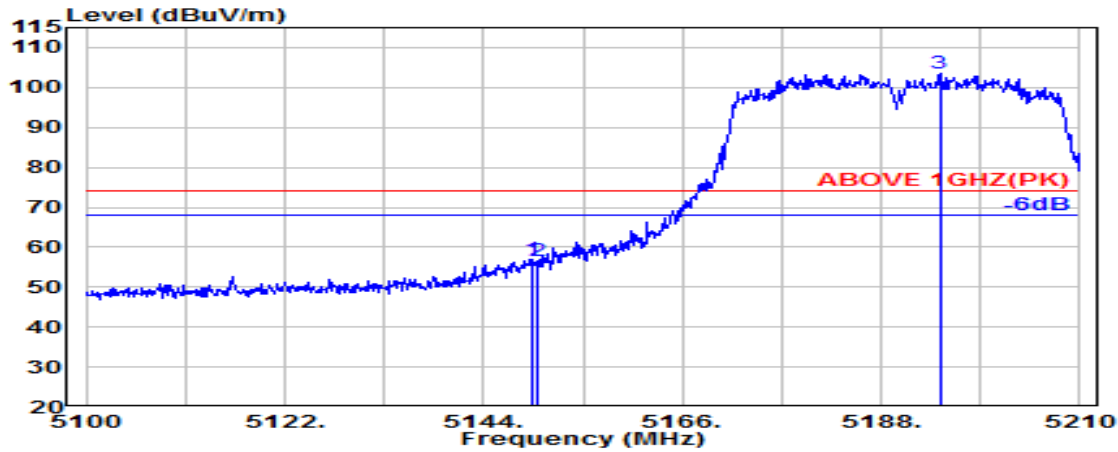

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.280	34.50	8.89	34.34	48.03	57.08	74.00	16.92	Peak
5150.000	34.50	8.89	34.34	47.40	56.45	74.00	17.55	Peak
@ 5194.490	34.68	8.91	34.32	94.35	103.61	---	---	Peak

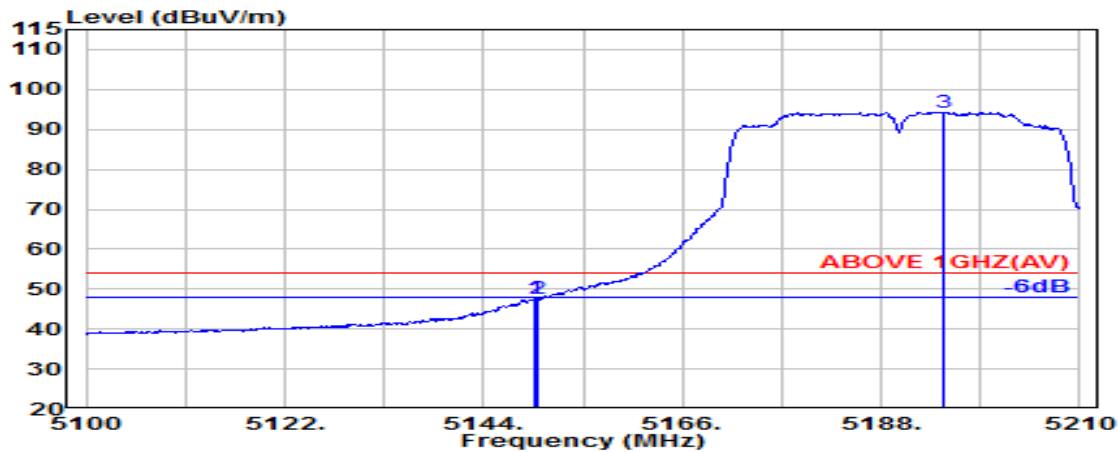


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.720	34.50	8.89	34.34	38.40	47.44	54.00	6.56	Average
5150.000	34.50	8.89	34.34	38.38	47.42	54.00	6.58	Average
@ 5194.930	34.68	8.91	34.32	85.03	94.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

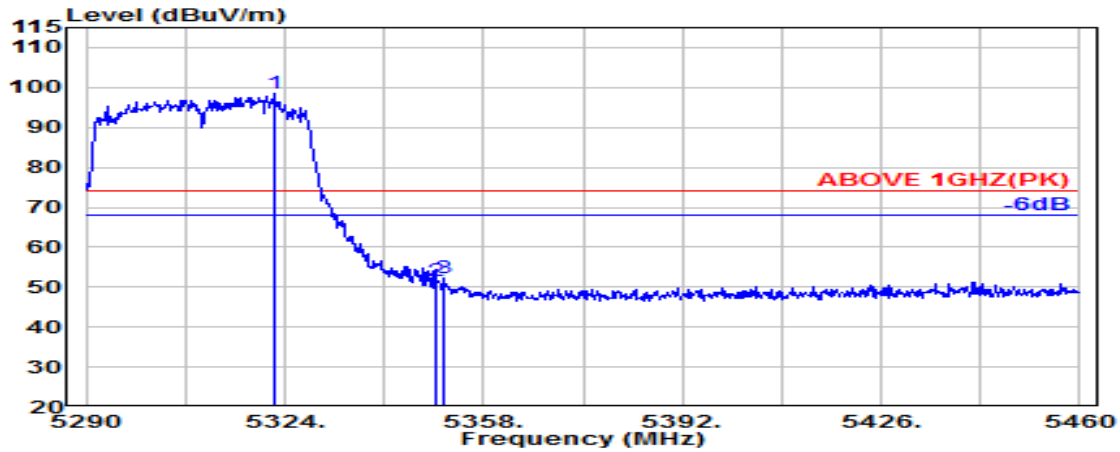

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.130	34.62	8.98	34.27	89.10	98.44	---	---	Peak
5350.000	34.90	9.00	34.26	41.81	51.45	74.00	22.55	Peak
5351.370	34.90	9.00	34.26	42.73	52.37	74.00	21.63	Peak

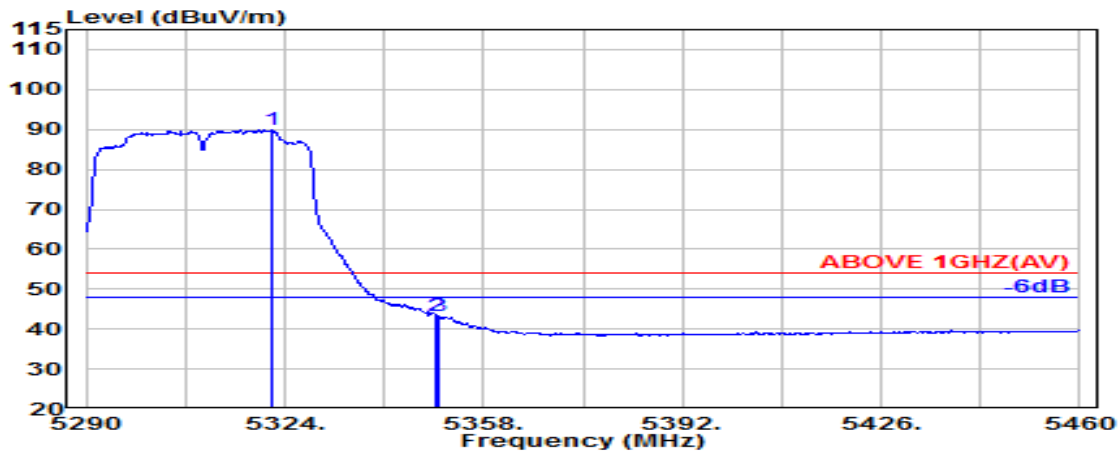


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.790	34.62	8.98	34.27	80.49	89.82	---	---	Average
5350.000	34.90	9.00	34.26	33.61	43.25	54.00	10.75	Average
5350.180	34.90	9.00	34.26	33.73	43.37	54.00	10.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

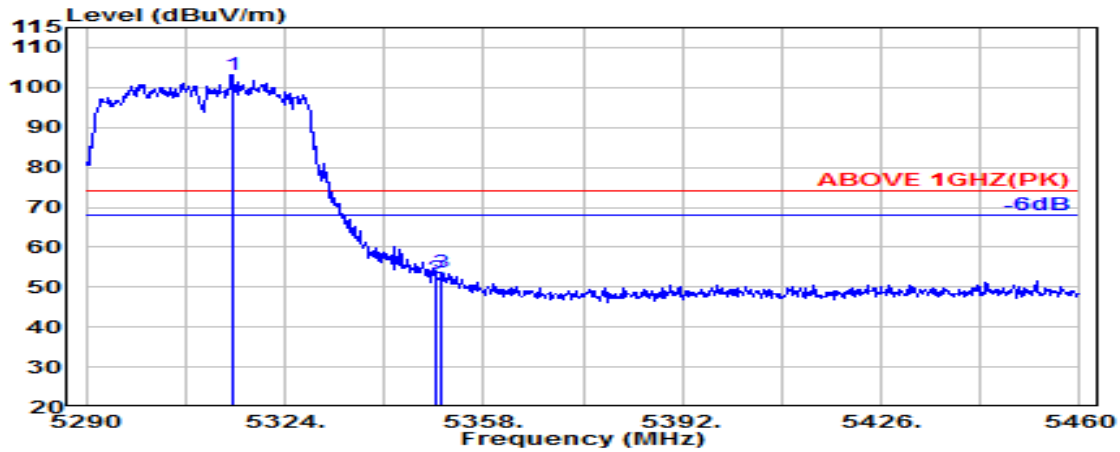

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.990	34.55	8.98	34.27	94.09	103.34	---	---	Peak
5350.000	34.90	9.00	34.26	42.75	52.39	74.00	21.61	Peak
5350.690	34.90	9.00	34.26	43.93	53.57	74.00	20.43	Peak

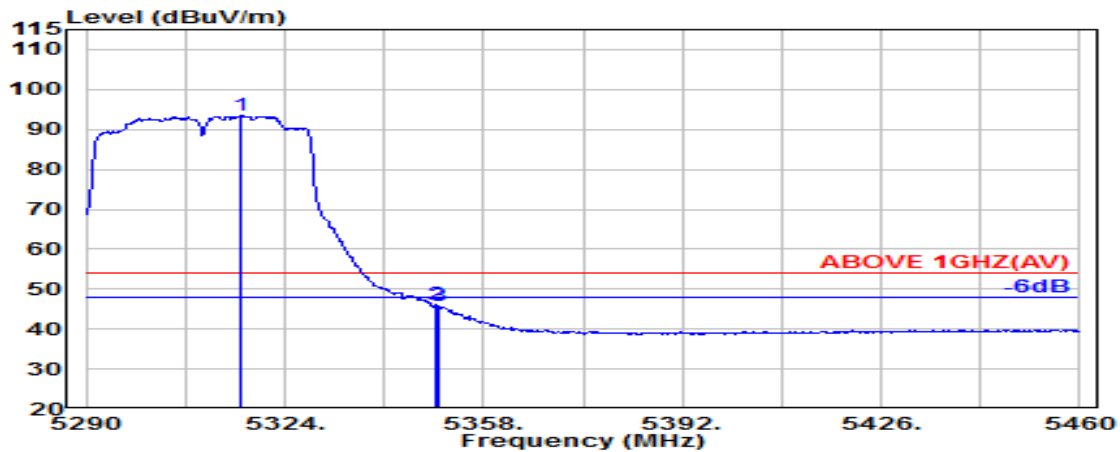


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.350	34.56	8.98	34.27	84.09	93.36	---	---	Average
5350.000	34.90	9.00	34.26	36.40	46.04	54.00	7.96	Average
5350.180	34.90	9.00	34.26	36.05	45.69	54.00	8.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

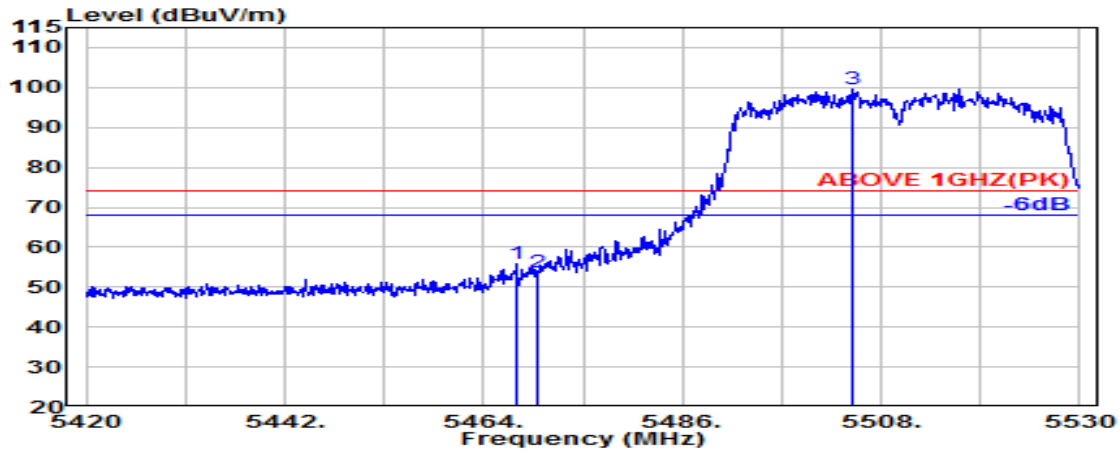

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.630	34.64	9.06	34.21	46.30	55.78	74.00	18.22	Peak
5470.000	34.64	9.06	34.21	44.38	53.87	74.00	20.13	Peak
@ 5504.920	34.70	9.08	34.20	90.13	99.71	---	---	Peak

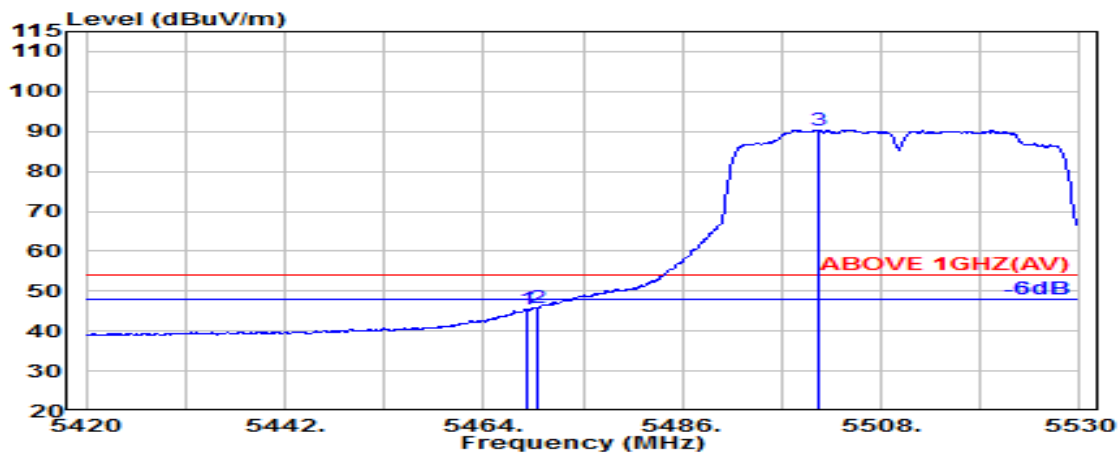


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.840	34.64	9.06	34.21	35.92	45.41	54.00	8.59	Average
5470.000	34.64	9.06	34.21	36.48	45.97	54.00	8.03	Average
@ 5500.960	34.70	9.08	34.20	80.85	90.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

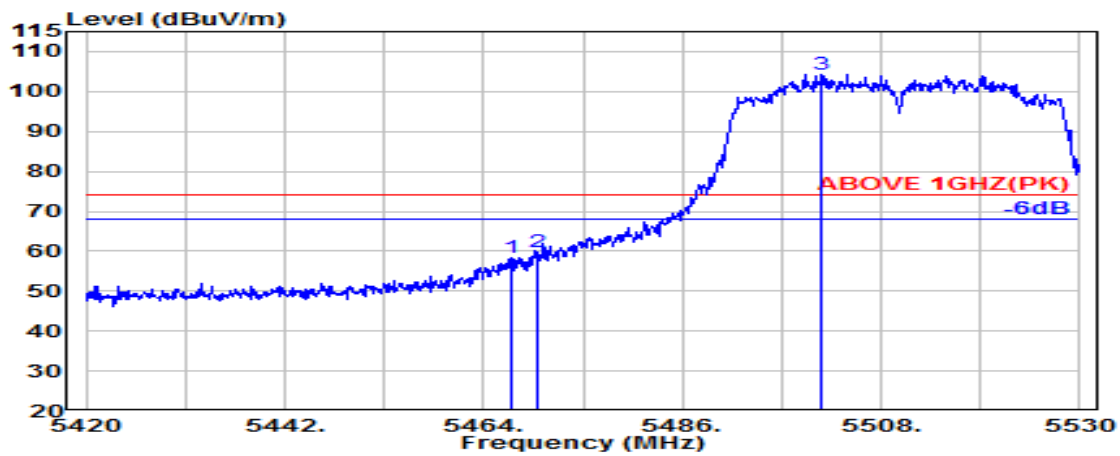

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.080	34.63	9.06	34.21	48.99	58.47	74.00	15.53	Peak
5470.000	34.64	9.06	34.21	50.17	59.66	74.00	14.34	Peak
@ 5501.400	34.70	9.08	34.20	94.70	104.28	---	---	Peak

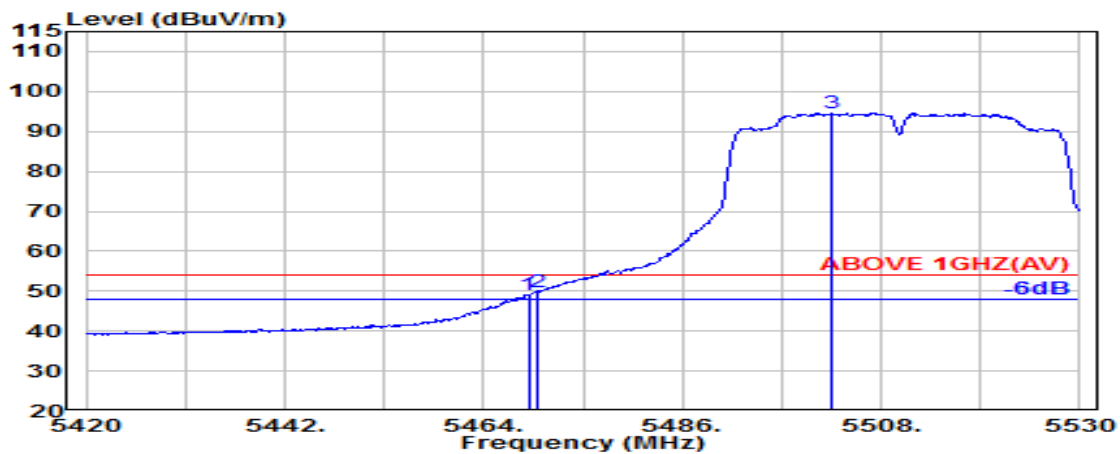


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.64	9.06	34.21	39.68	49.17	54.00	4.83	Average
5470.000	34.64	9.06	34.21	40.38	49.87	54.00	4.13	Average
@ 5502.390	34.70	9.08	34.20	84.96	94.54	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

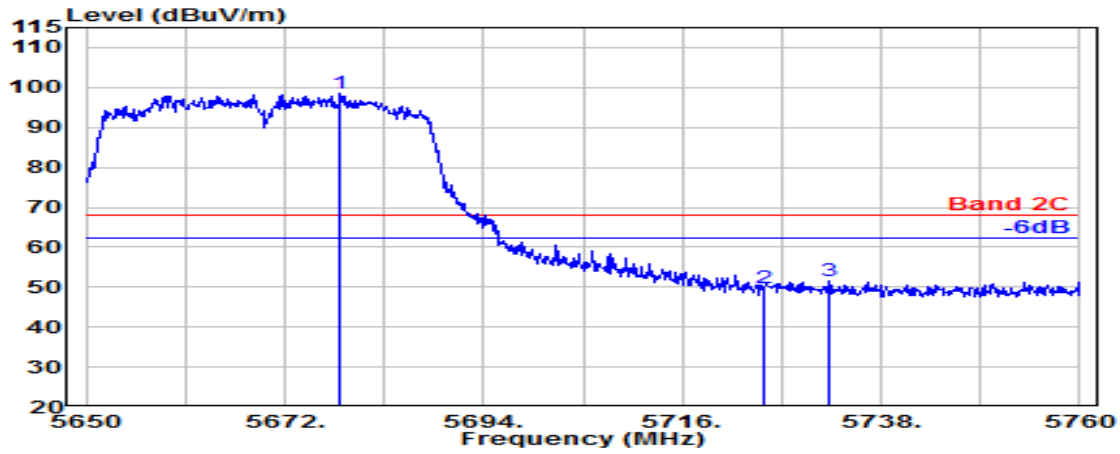

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.050	34.61	9.17	34.28	88.84	98.34	---	---	Peak
5725.000	34.85	9.19	34.31	40.18	49.92	68.20	18.28	Peak
5732.170	34.89	9.20	34.31	41.73	51.51	68.20	16.69	Peak

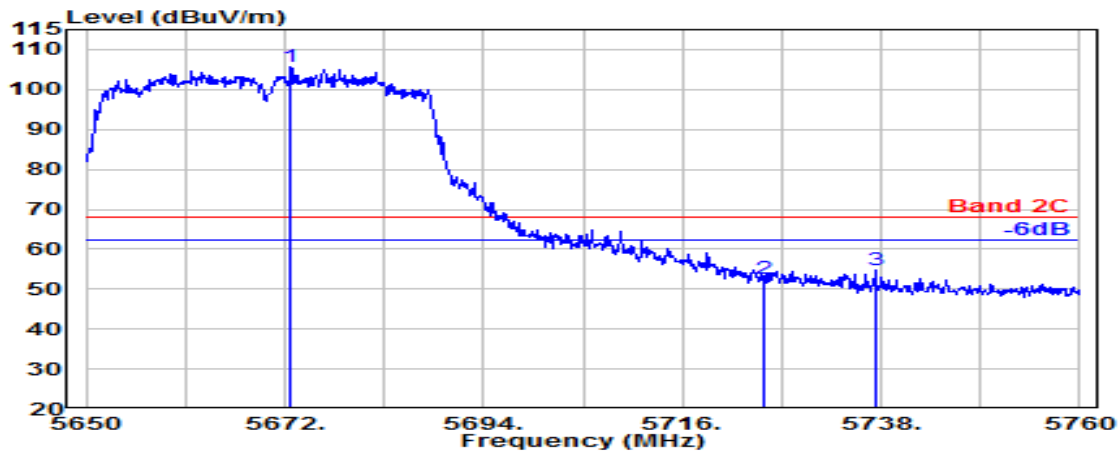


Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.660	34.59	9.17	34.28	96.19	105.66	---	---	Peak
5725.000	34.85	9.19	34.31	42.77	52.50	68.20	15.70	Peak
5737.450	34.92	9.20	34.31	45.02	54.83	68.20	13.37	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

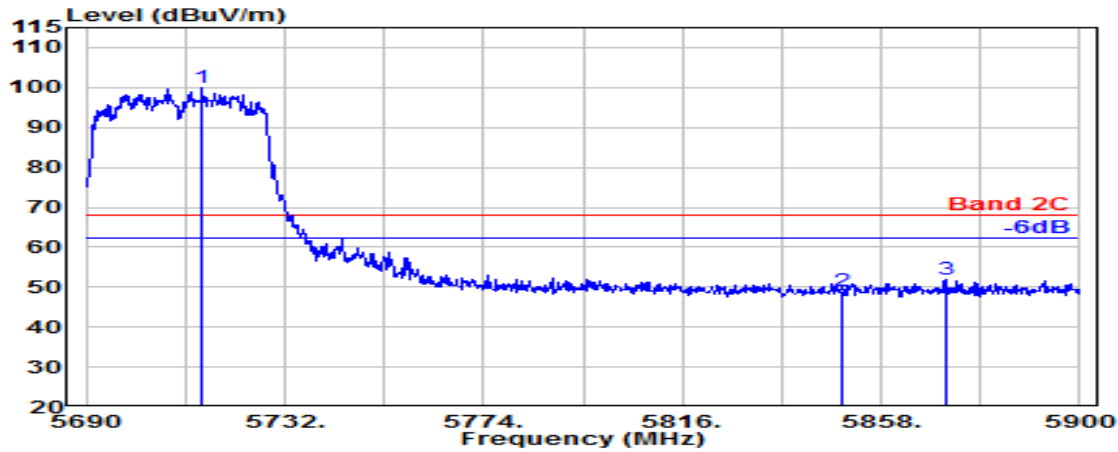
Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.360	34.79	9.19	34.30	90.35	100.02	---	---	Peak
5850.000	35.40	9.26	34.36	38.87	49.17	68.20	19.03	Peak
5871.650	35.57	9.27	34.37	41.37	51.83	68.20	16.37	Peak

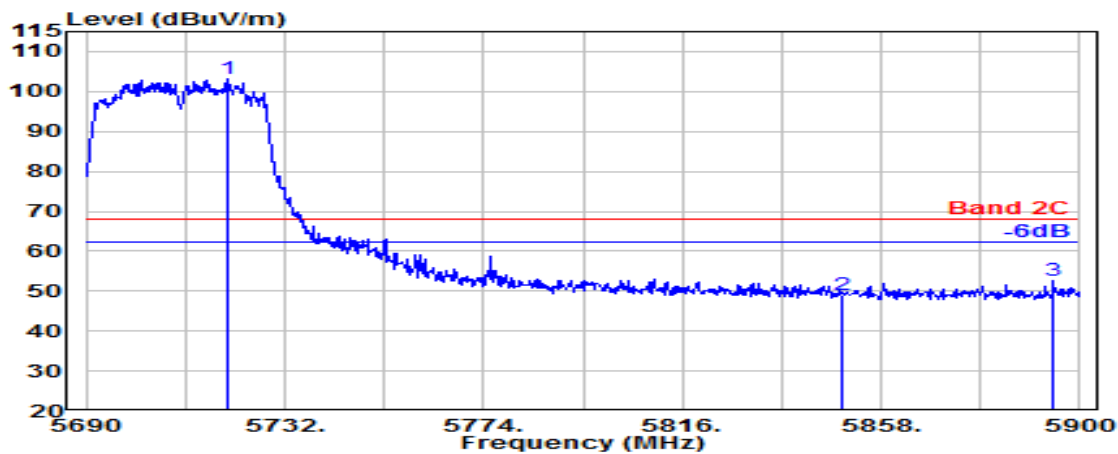
Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.820	34.82	9.19	34.30	93.57	103.28	---	---	Peak
5850.000	35.40	9.26	34.36	38.69	48.99	68.20	19.21	Peak
5894.330	35.75	9.28	34.38	42.05	52.70	68.20	15.50	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

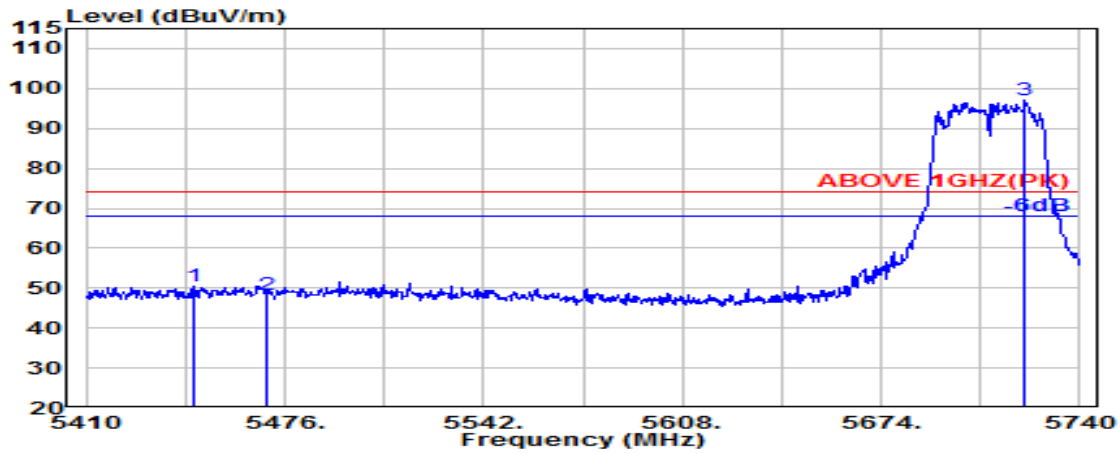

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.640	34.62	9.05	34.22	40.94	50.39	74.00	23.61	Peak
5470.000	34.64	9.06	34.21	38.85	48.34	74.00	25.66	Peak
@ 5721.850	34.83	9.19	34.30	87.19	96.91	---	---	Peak

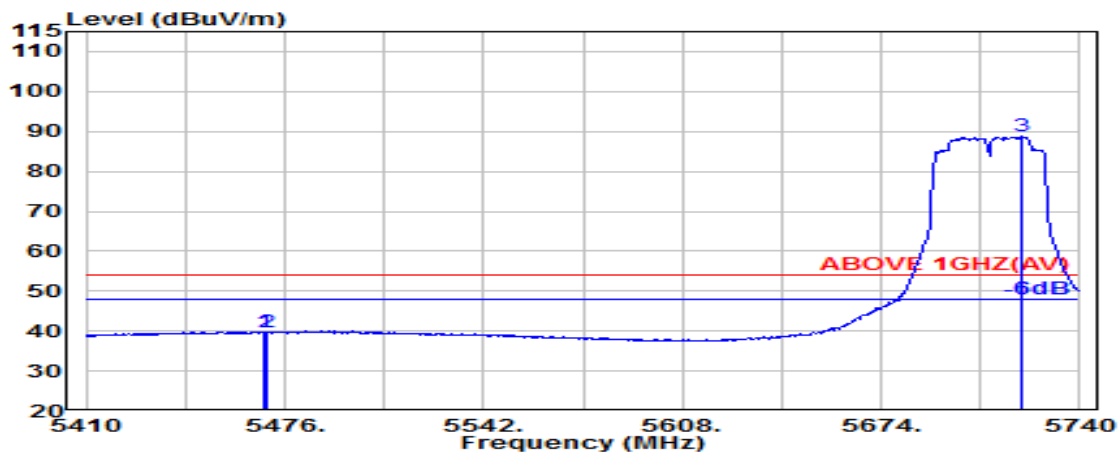


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.740	34.64	9.06	34.21	30.34	39.83	54.00	14.17	Average
5470.000	34.64	9.06	34.21	30.27	39.76	54.00	14.24	Average
@ 5720.860	34.83	9.19	34.30	78.94	88.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

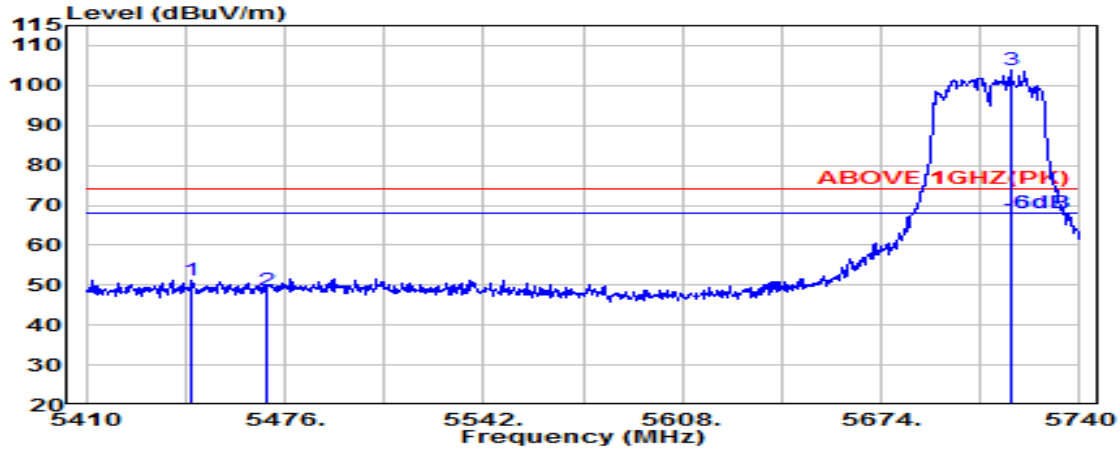

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5444.980	34.62	9.05	34.22	41.91	51.35	74.00	22.65	Peak
5470.000	34.64	9.06	34.21	39.05	48.54	74.00	25.46	Peak
@ 5716.900	34.80	9.19	34.30	94.33	104.02	---	---	Peak

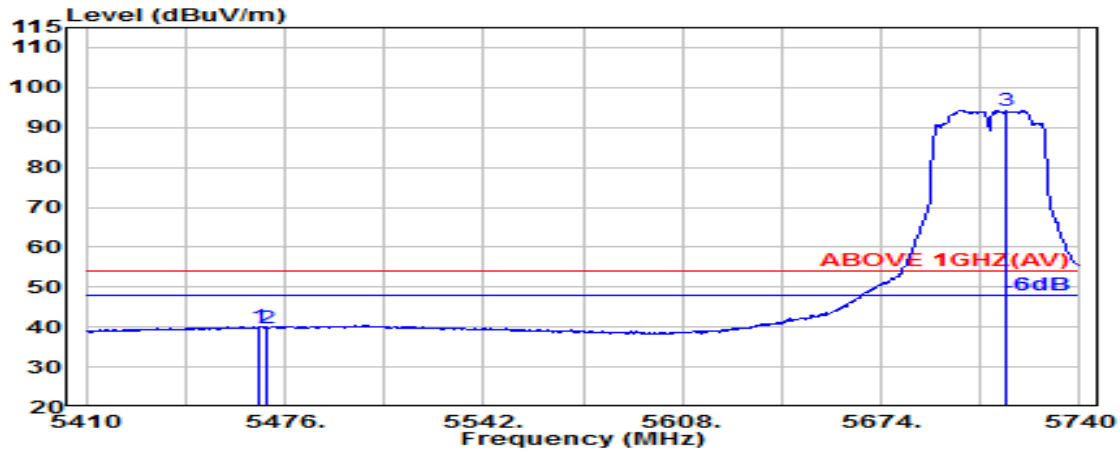


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.750	34.64	9.06	34.21	30.55	40.04	54.00	13.96	Average
5470.000	34.64	9.06	34.21	30.40	39.89	54.00	14.11	Average
@ 5715.250	34.79	9.19	34.30	84.64	94.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

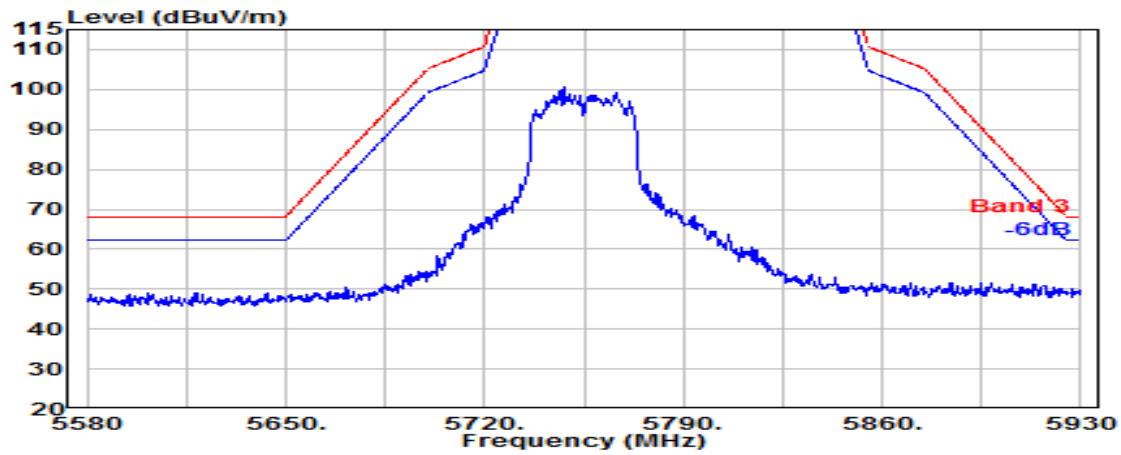


Antenna at Vertical Polarization

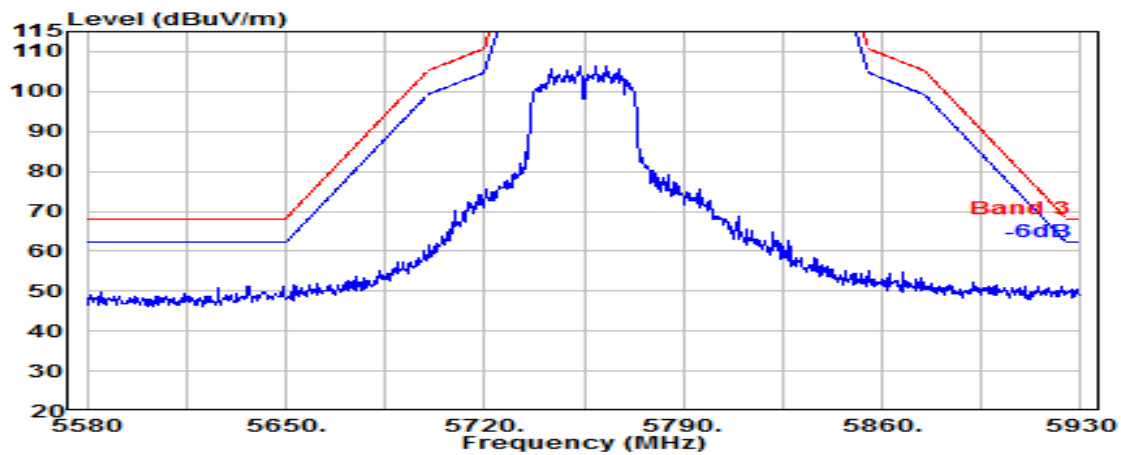


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

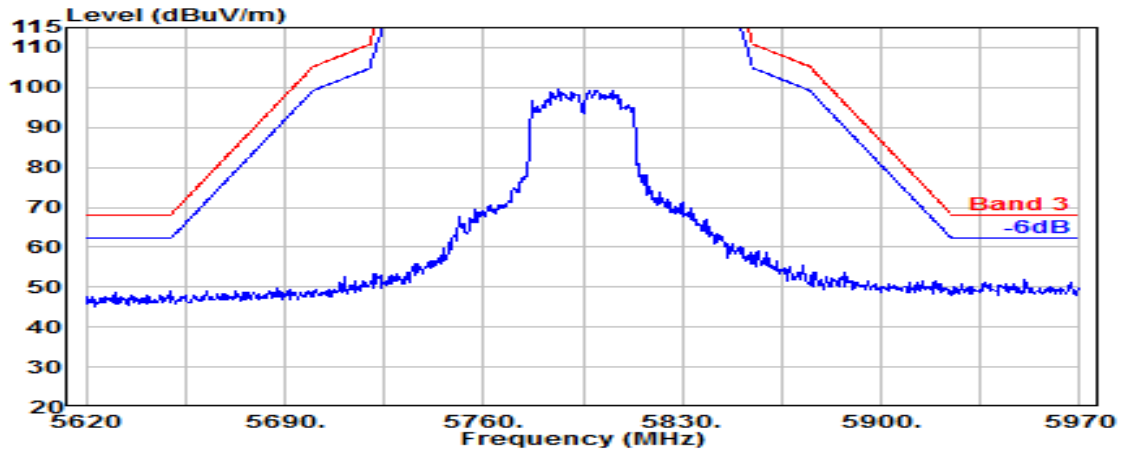

Antenna at Vertical Polarization

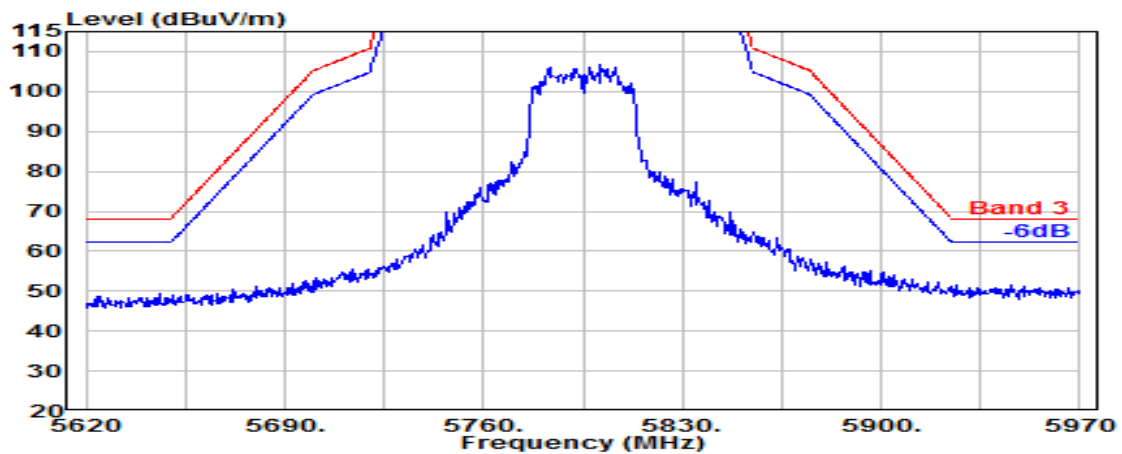


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

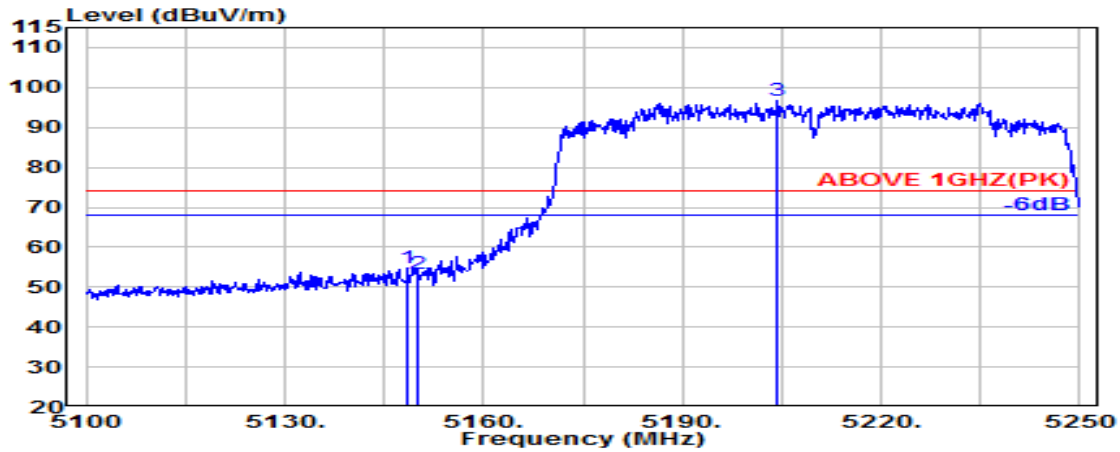

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.49	8.89	34.34	45.79	54.83	74.00	19.17	Peak
5150.000	34.50	8.89	34.34	44.45	53.50	74.00	20.50	Peak
@ 5204.400	34.68	8.92	34.32	87.31	96.59	---	---	Peak

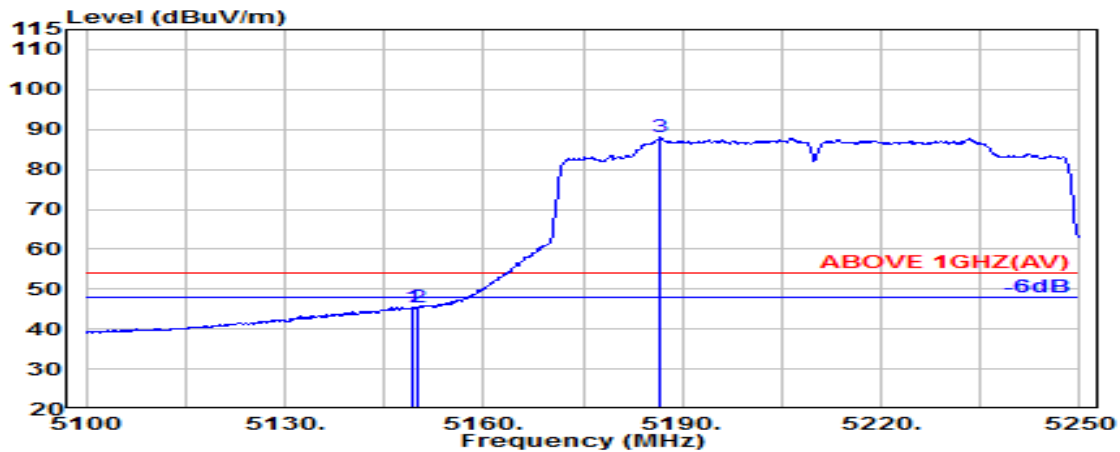


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.50	8.89	34.34	36.33	45.37	54.00	8.63	Average
5150.000	34.50	8.89	34.34	36.29	45.34	54.00	8.66	Average
@ 5186.550	34.65	8.91	34.32	78.86	88.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

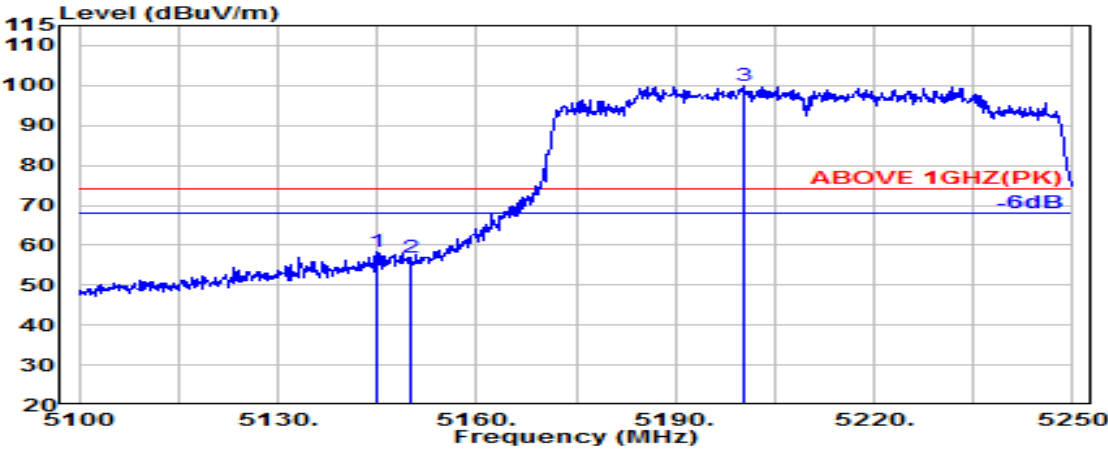

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	34.47	8.88	34.34	49.24	58.25	74.00	15.75	Peak
5150.000	34.50	8.89	34.34	47.92	56.97	74.00	17.03	Peak
@ 5200.500	34.70	8.91	34.32	90.53	99.83	---	---	Peak

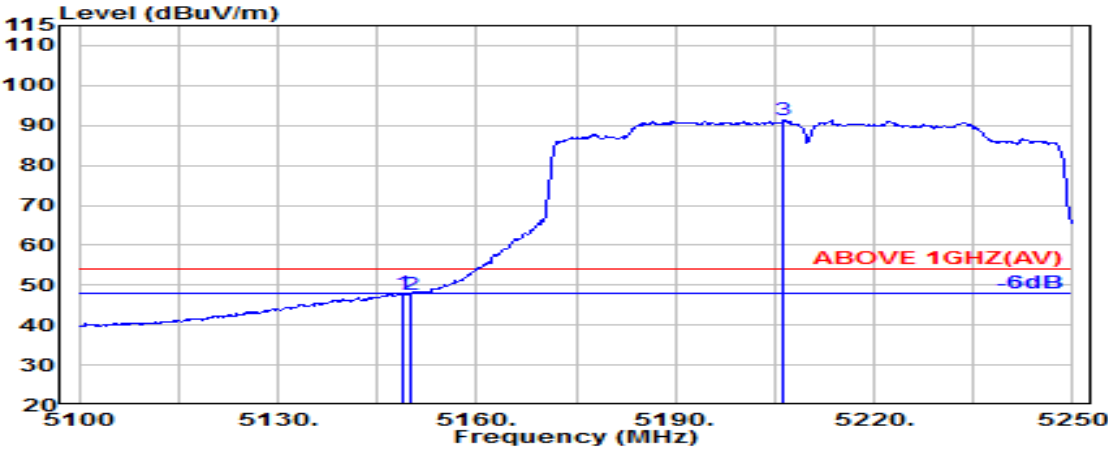


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	34.49	8.89	34.34	39.03	48.07	54.00	5.93	Average
5150.000	34.50	8.89	34.34	38.53	47.57	54.00	6.43	Average
@ 5206.350	34.67	8.92	34.32	81.97	91.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

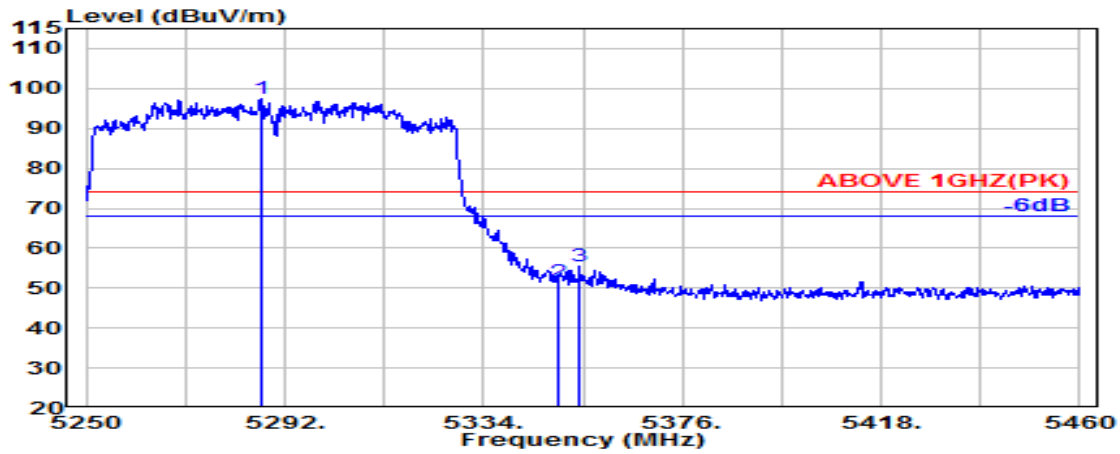

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.170	34.43	8.96	34.28	88.15	97.26	---	---	Peak
5350.000	34.90	9.00	34.26	41.99	51.63	74.00	22.37	Peak
5354.370	34.89	9.00	34.26	45.71	55.34	74.00	18.66	Peak

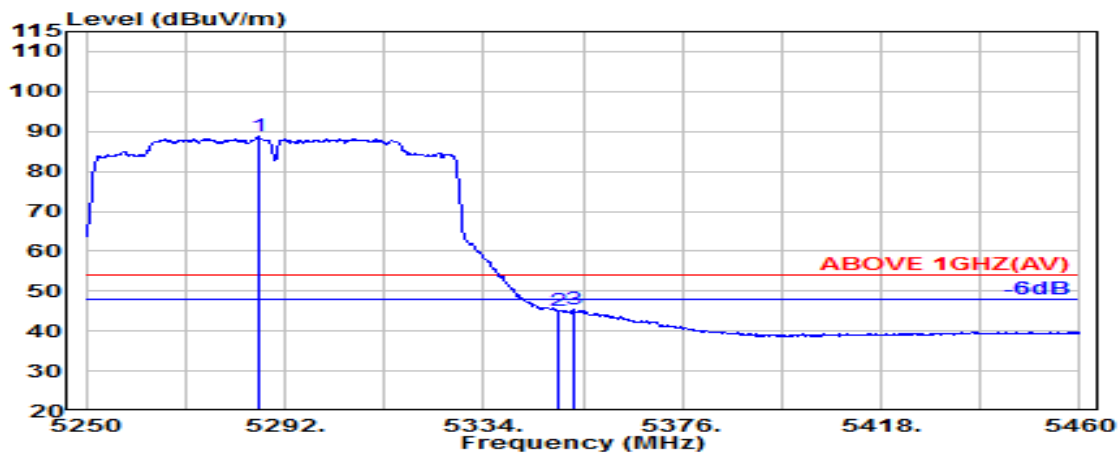


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.540	34.43	8.96	34.28	79.59	88.69	---	---	Average
5350.000	34.90	9.00	34.26	35.40	45.04	54.00	8.96	Average
5353.110	34.89	9.00	34.26	35.66	45.30	54.00	8.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

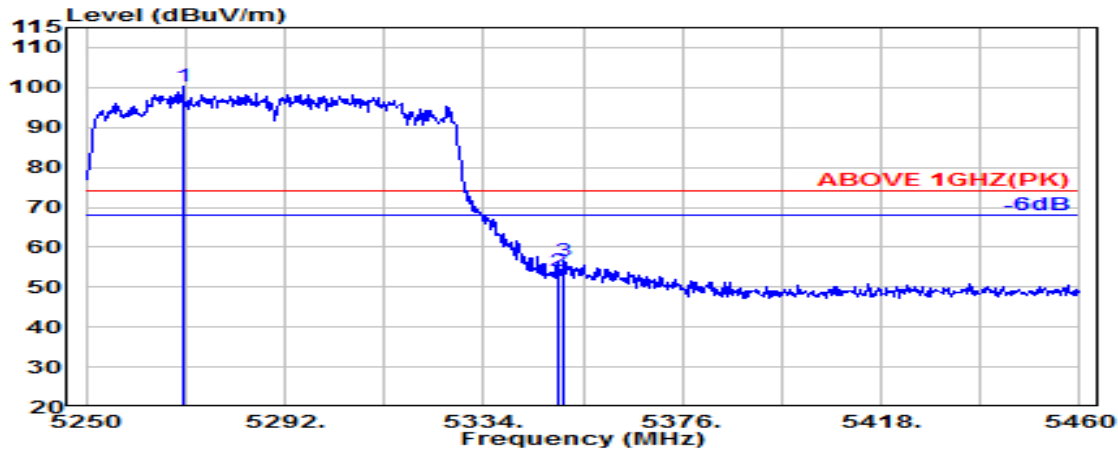

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.580	34.46	8.95	34.29	91.10	100.23	---	---	Peak
5350.000	34.90	9.00	34.26	44.43	54.07	74.00	19.93	Peak
5351.010	34.90	9.00	34.26	46.81	56.45	74.00	17.55	Peak

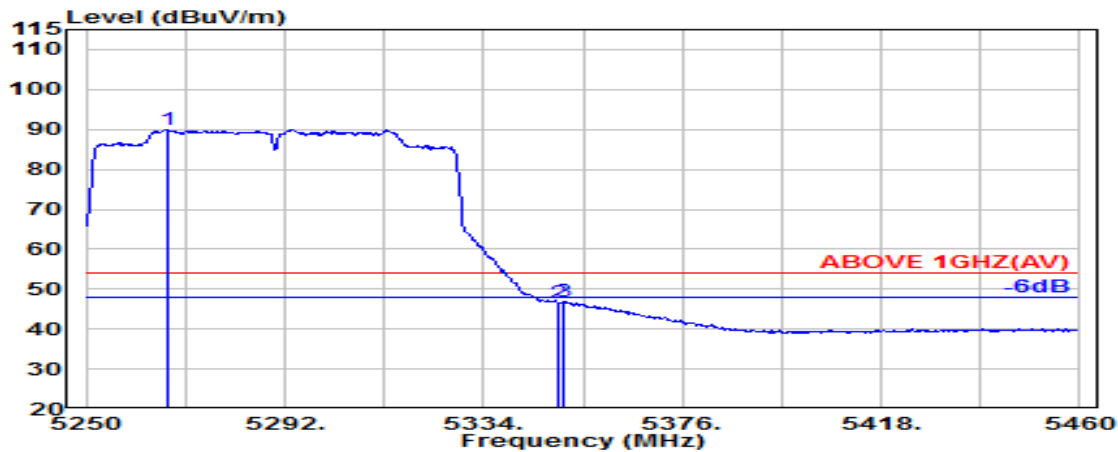


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.010	34.47	8.95	34.29	80.90	90.03	---	---	Average
5350.000	34.90	9.00	34.26	36.81	46.45	54.00	7.55	Average
5351.010	34.90	9.00	34.26	37.27	46.90	54.00	7.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

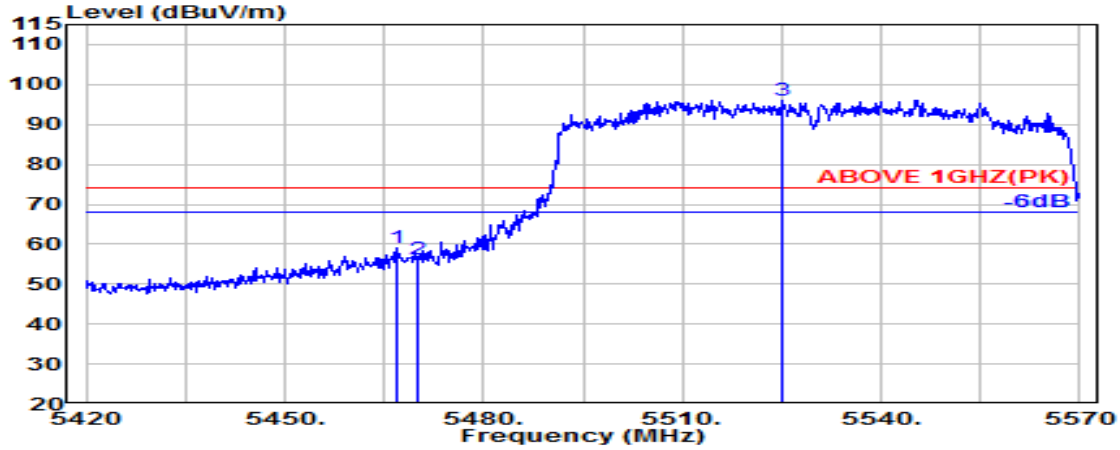

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.63	9.06	34.21	49.70	59.18	74.00	14.82	Peak
5470.000	34.64	9.06	34.21	46.88	56.37	74.00	17.63	Peak
@ 5525.150	34.70	9.09	34.21	86.52	96.10	---	---	Peak

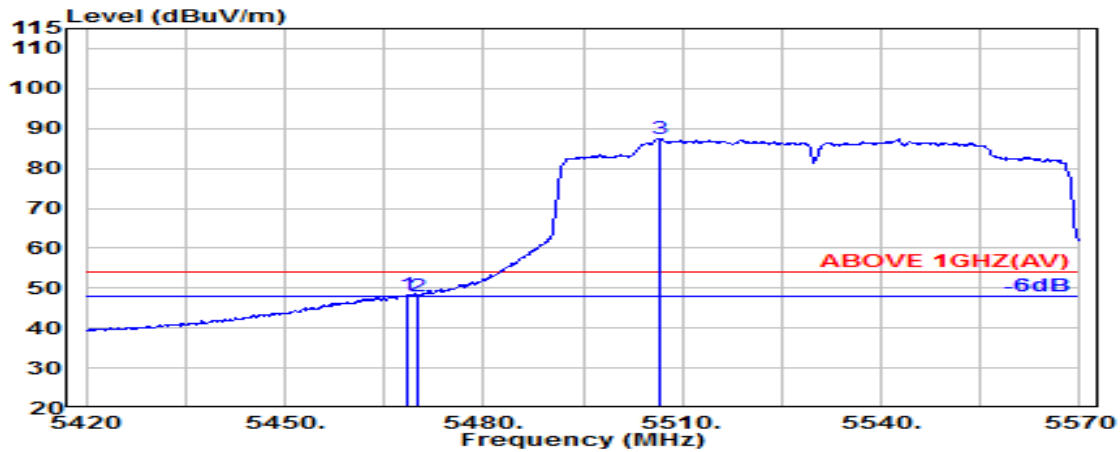


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.64	9.06	34.21	38.82	48.31	54.00	5.69	Average
5470.000	34.64	9.06	34.21	38.64	48.13	54.00	5.87	Average
@ 5506.700	34.70	9.08	34.20	77.84	87.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

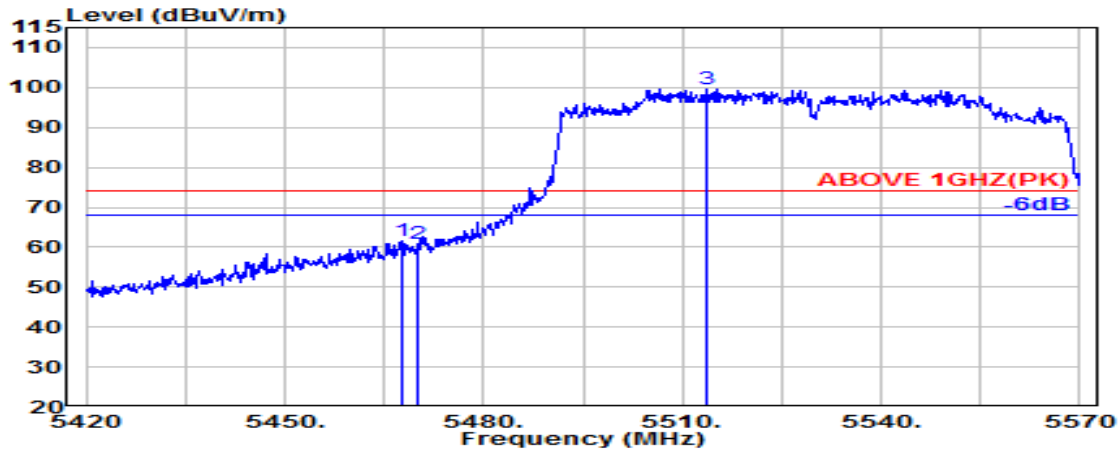

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.550	34.64	9.06	34.21	51.97	61.45	74.00	12.55	Peak
5470.000	34.64	9.06	34.21	51.43	60.92	74.00	13.08	Peak
@ 5513.600	34.70	9.08	34.21	90.16	99.74	---	---	Peak

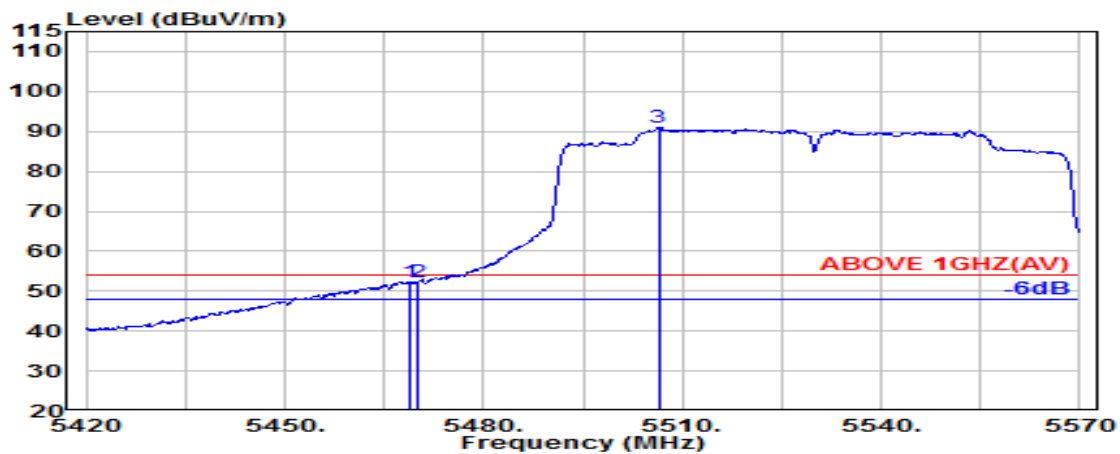


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.750	34.64	9.06	34.21	42.80	52.28	54.00	1.72	Average
5470.000	34.64	9.06	34.21	42.69	52.18	54.00	1.82	Average
@ 5506.400	34.70	9.08	34.20	81.55	91.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

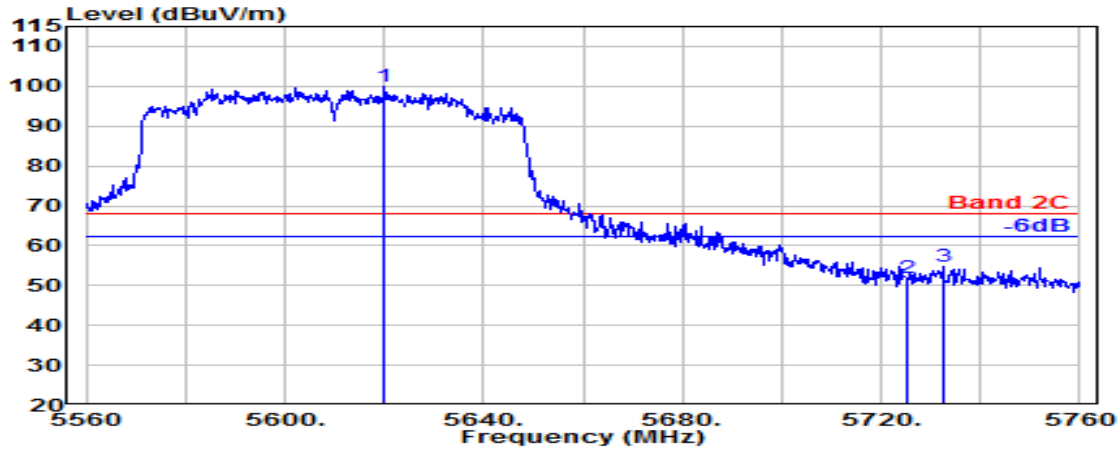

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5620.000	34.44	9.14	34.26	90.74	100.06	---	---	Peak
5725.000	34.85	9.19	34.31	42.27	52.01	68.20	16.19	Peak
5732.400	34.89	9.20	34.31	44.86	54.64	68.20	13.56	Peak

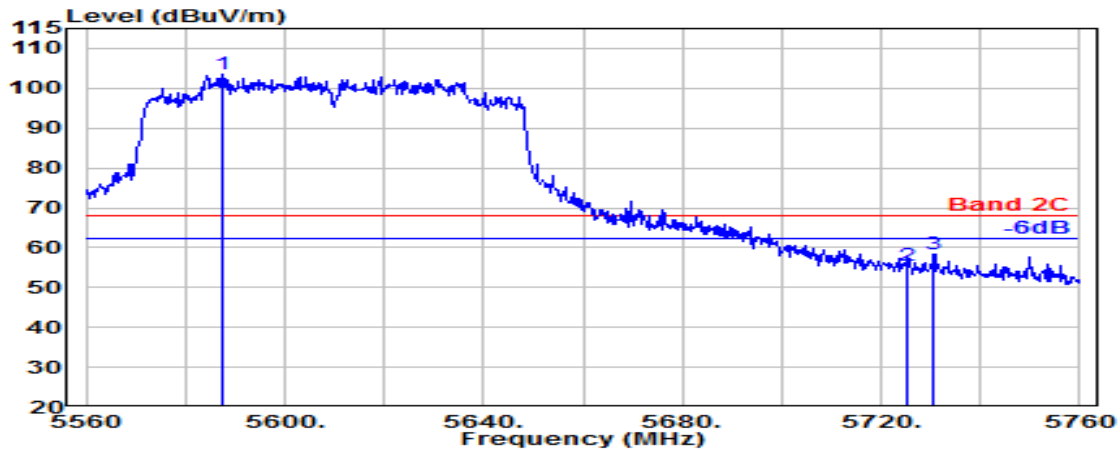


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5587.600	34.47	9.12	34.24	94.05	103.41	---	---	Peak
5725.000	34.85	9.19	34.31	45.60	55.33	68.20	12.87	Peak
5730.600	34.88	9.20	34.31	48.70	58.47	68.20	9.73	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

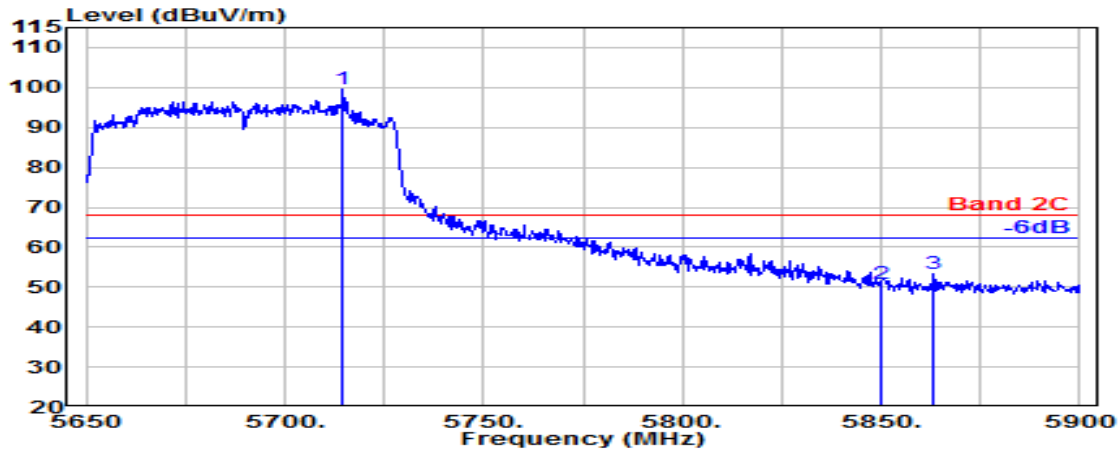

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.500	34.79	9.19	34.30	89.75	99.42	---	---	Peak
5850.000	35.40	9.26	34.36	40.50	50.80	68.20	17.40	Peak
5863.250	35.51	9.26	34.37	42.90	53.30	68.20	14.90	Peak

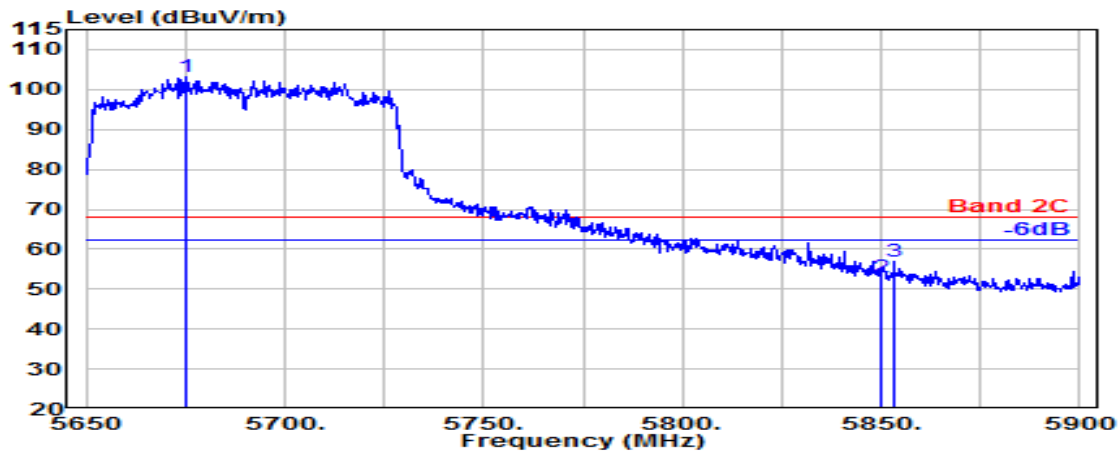


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.250	34.60	9.17	34.28	93.76	103.25	---	---	Peak
5850.000	35.40	9.26	34.36	42.82	53.11	68.20	15.09	Peak
5853.250	35.43	9.26	34.36	46.77	57.09	68.20	11.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

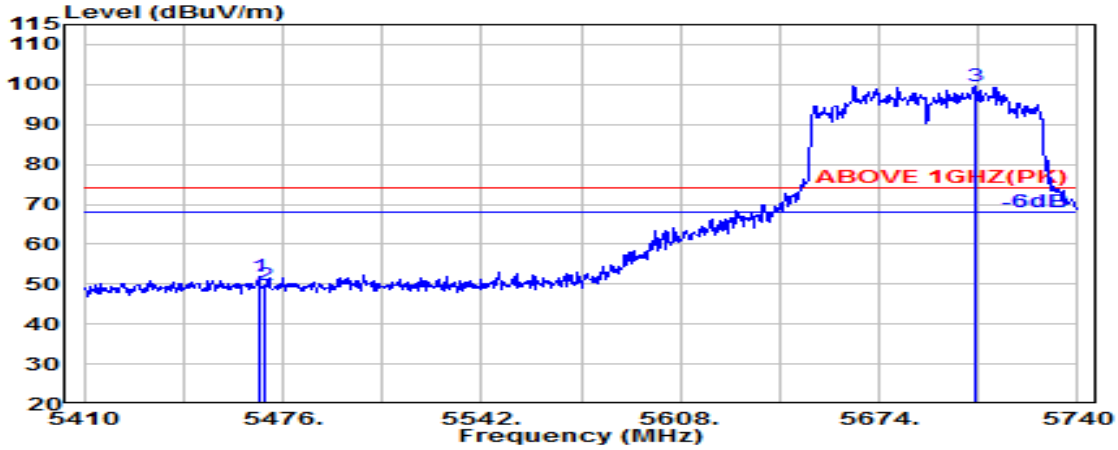

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.080	34.64	9.06	34.21	42.28	51.76	74.00	22.24	Peak
5470.000	34.64	9.06	34.21	40.23	49.72	74.00	24.28	Peak
@ 5705.680	34.73	9.18	34.30	89.85	99.47	---	---	Peak

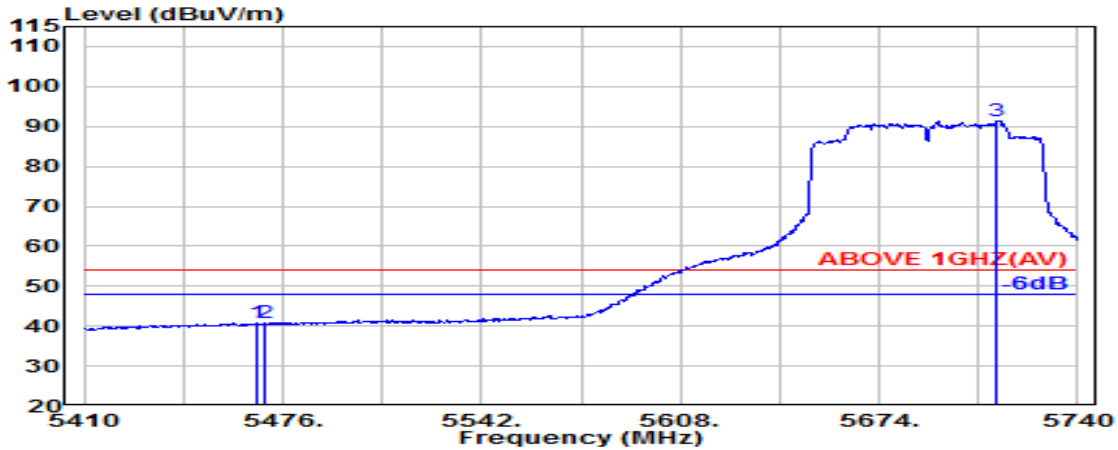


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.64	9.06	34.21	31.15	40.64	54.00	13.36	Average
5470.000	34.64	9.06	34.21	31.15	40.64	54.00	13.36	Average
@ 5713.270	34.78	9.19	34.30	81.74	91.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

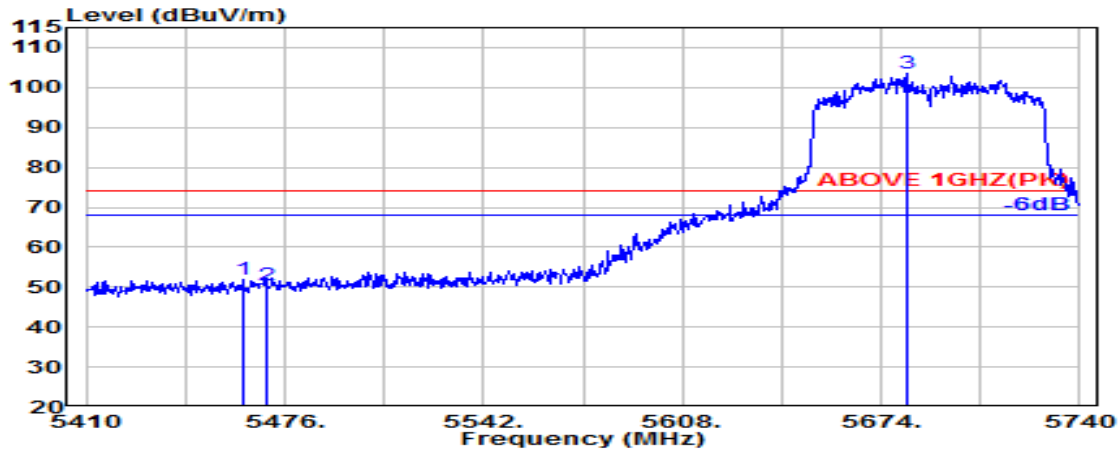

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.140	34.62	9.06	34.21	42.50	51.97	74.00	22.03	Peak
5470.000	34.64	9.06	34.21	41.05	50.54	74.00	23.46	Peak
@ 5682.580	34.63	9.17	34.29	94.03	103.55	---	---	Peak

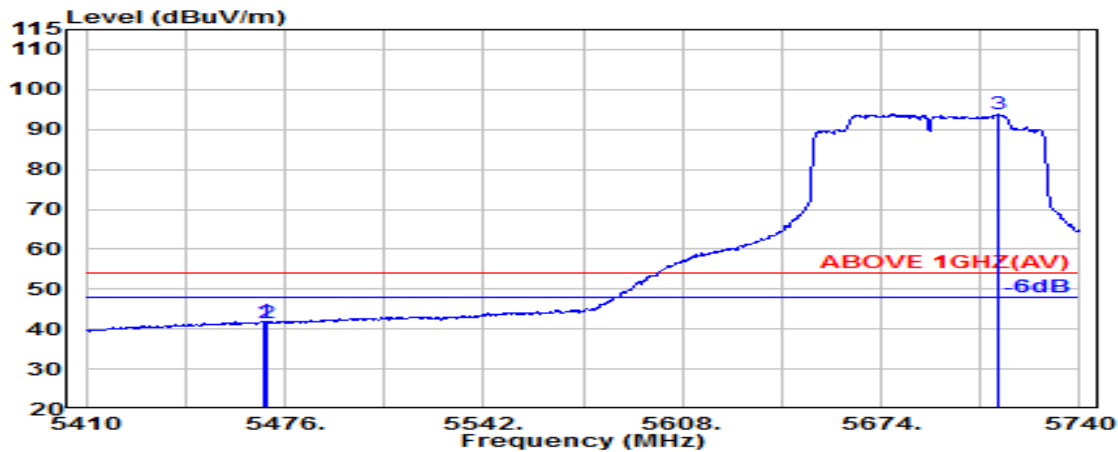


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.740	34.64	9.06	34.21	32.32	41.80	54.00	12.20	Average
5470.000	34.64	9.06	34.21	32.05	41.54	54.00	12.46	Average
@ 5713.270	34.78	9.19	34.30	84.19	93.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

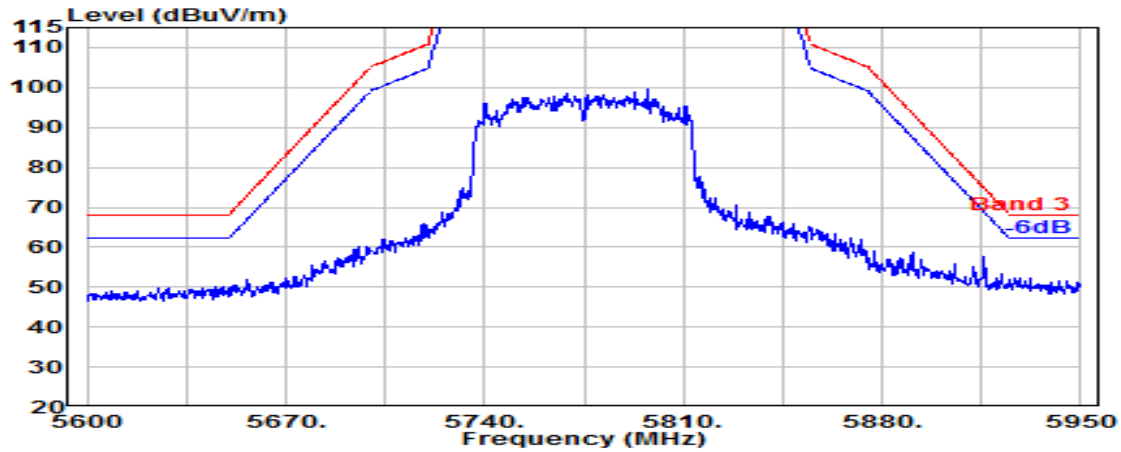

Antenna at Vertical Polarization

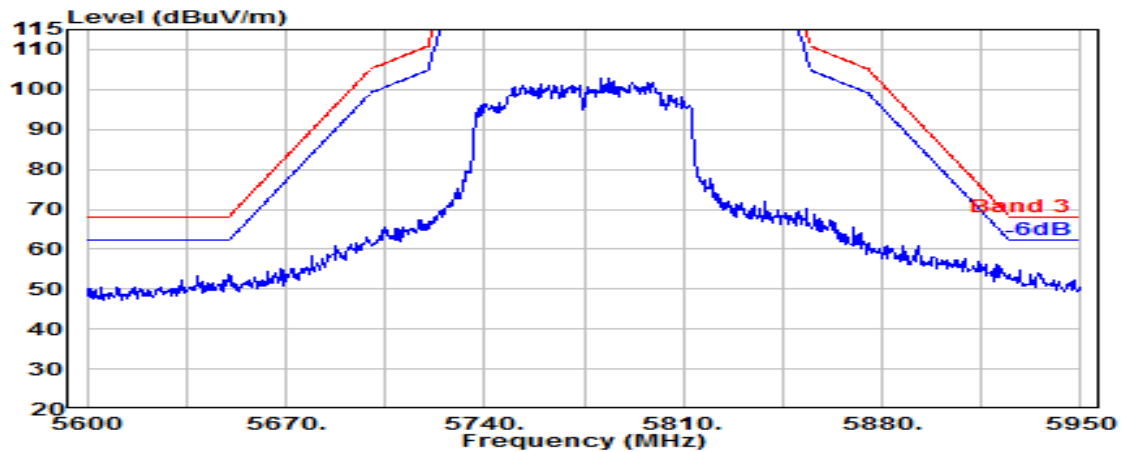


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

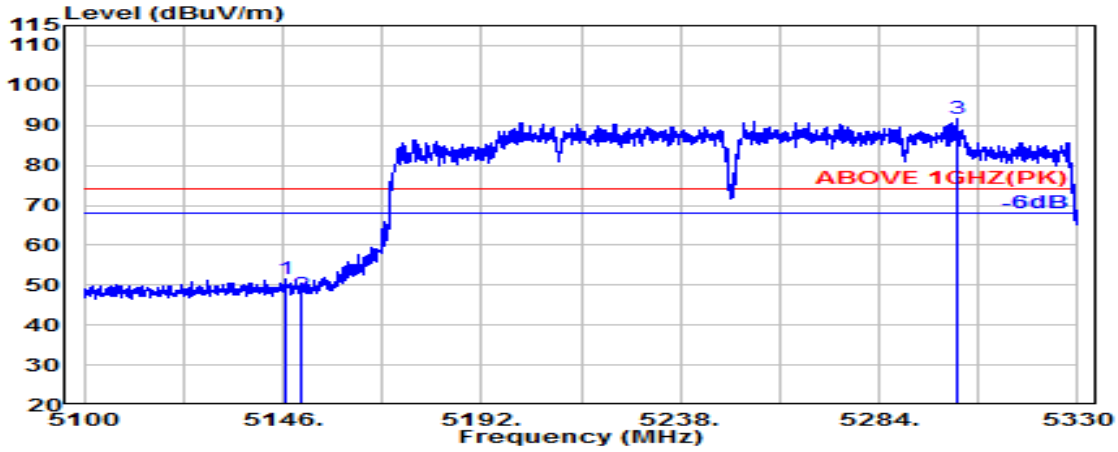

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.700	34.48	8.88	34.34	42.66	51.68	74.00	22.32	Peak
5150.000	34.50	8.89	34.34	38.70	47.74	74.00	26.26	Peak
@ 5301.800	34.42	8.97	34.28	82.50	91.61	---	---	Peak

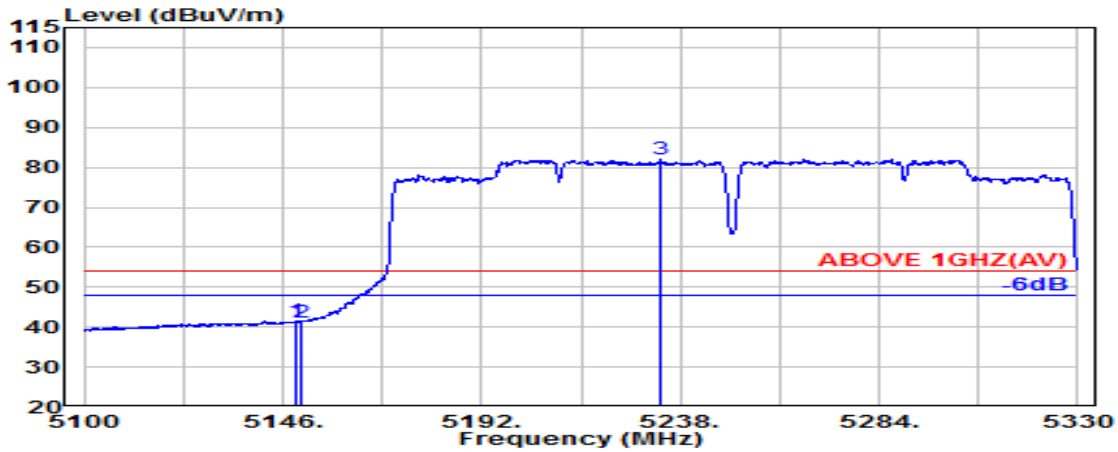


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	34.49	8.89	34.34	32.52	41.56	54.00	12.44	Average
5150.000	34.50	8.89	34.34	32.15	41.20	54.00	12.80	Average
@ 5233.400	34.57	8.93	34.30	72.72	81.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

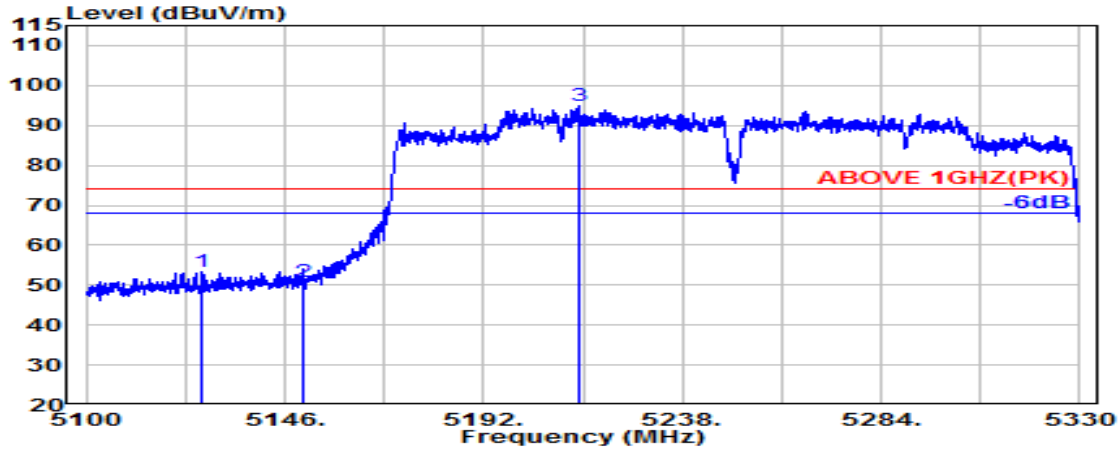

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.000	34.36	8.87	34.35	44.55	53.44	74.00	20.56	Peak
5150.000	34.50	8.89	34.34	41.79	50.84	74.00	23.16	Peak
@ 5214.000	34.64	8.92	34.31	85.61	94.87	---	---	Peak

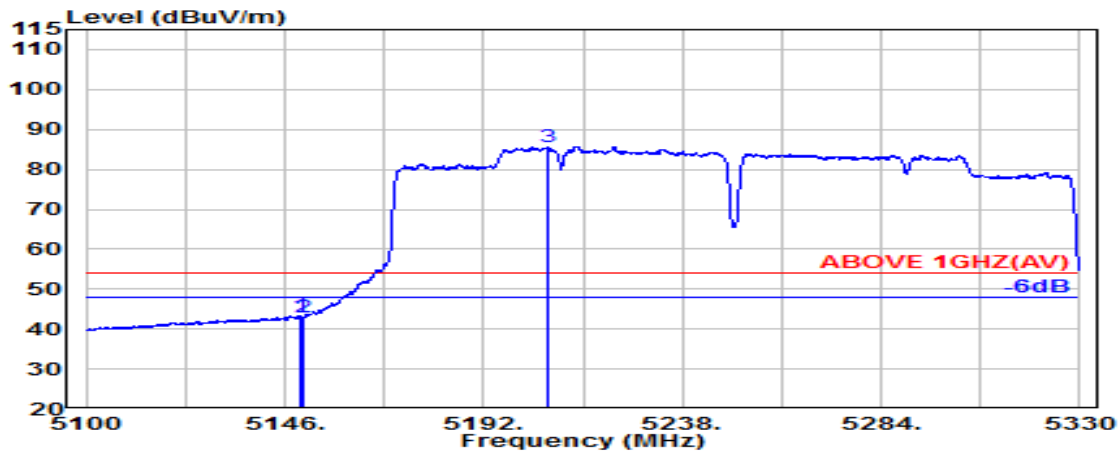


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	34.50	8.89	34.34	34.30	43.34	54.00	10.66	Average
5150.000	34.50	8.89	34.34	33.93	42.98	54.00	11.02	Average
@ 5206.700	34.67	8.92	34.32	76.44	85.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

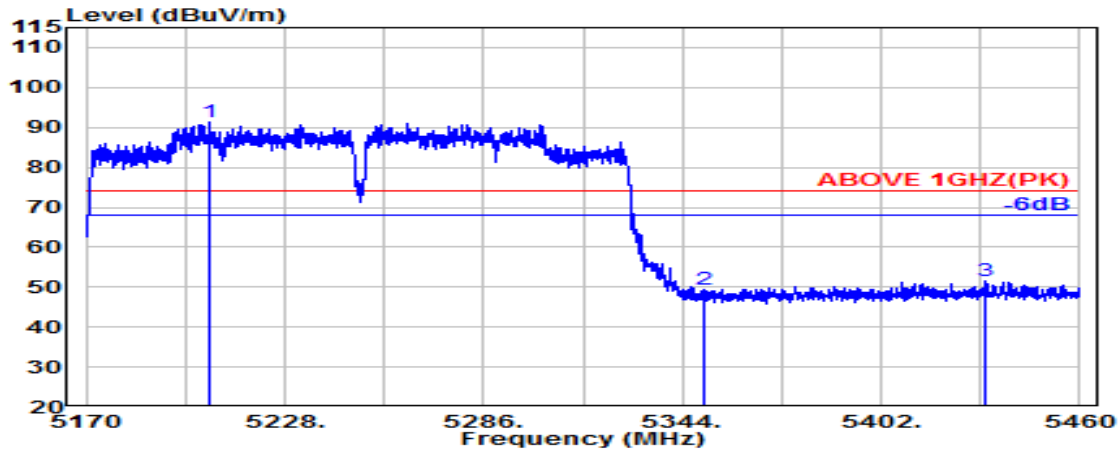

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5206.100	34.68	8.92	34.32	82.08	91.36	---	---	Peak
5350.000	34.90	9.00	34.26	39.74	49.38	74.00	24.62	Peak
5432.700	34.67	9.04	34.23	42.02	51.50	74.00	22.50	Peak

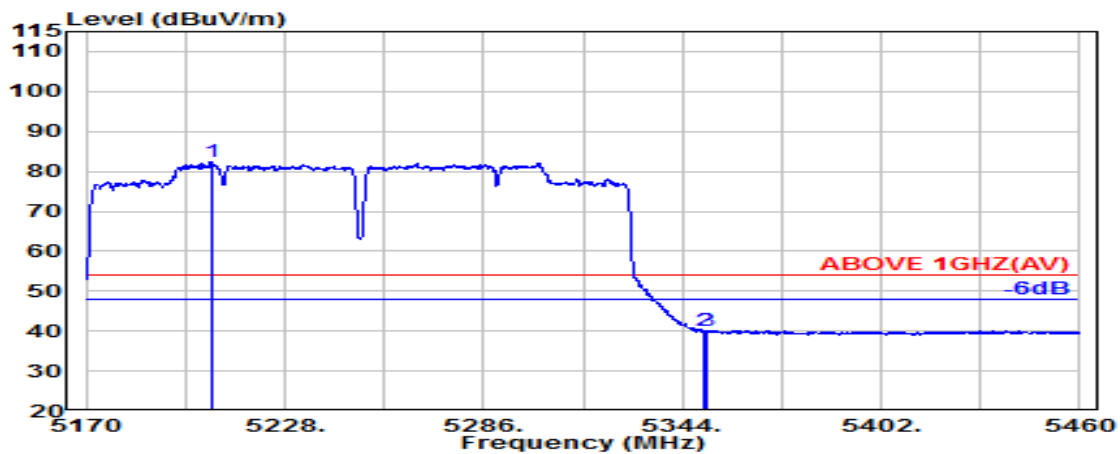

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5206.400	34.67	8.92	34.32	73.04	82.32	---	---	Average
5350.000	34.90	9.00	34.26	30.38	40.02	54.00	13.98	Average
5350.900	34.90	9.00	34.26	30.54	40.17	54.00	13.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5198.800	34.70	8.91	34.32	85.17	94.46	---	---	Peak
5350.000	34.90	9.00	34.26	40.11	49.75	74.00	24.25	Peak
5356.300	34.89	9.00	34.26	41.88	51.51	74.00	22.49	Peak

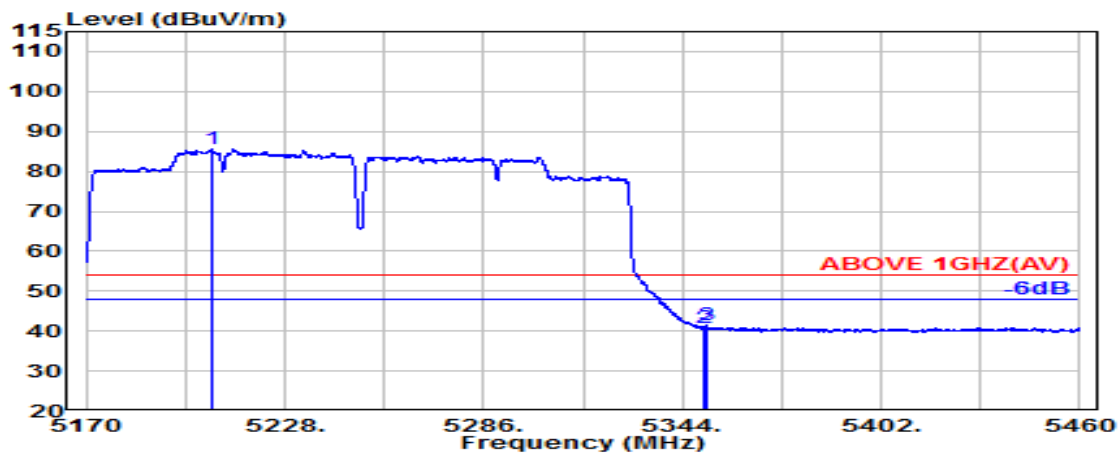


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.700	34.67	8.92	34.32	76.43	85.70	---	---	Average
5350.000	34.90	9.00	34.26	31.33	40.97	54.00	13.03	Average
5351.300	34.90	9.00	34.26	31.73	41.36	54.00	12.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

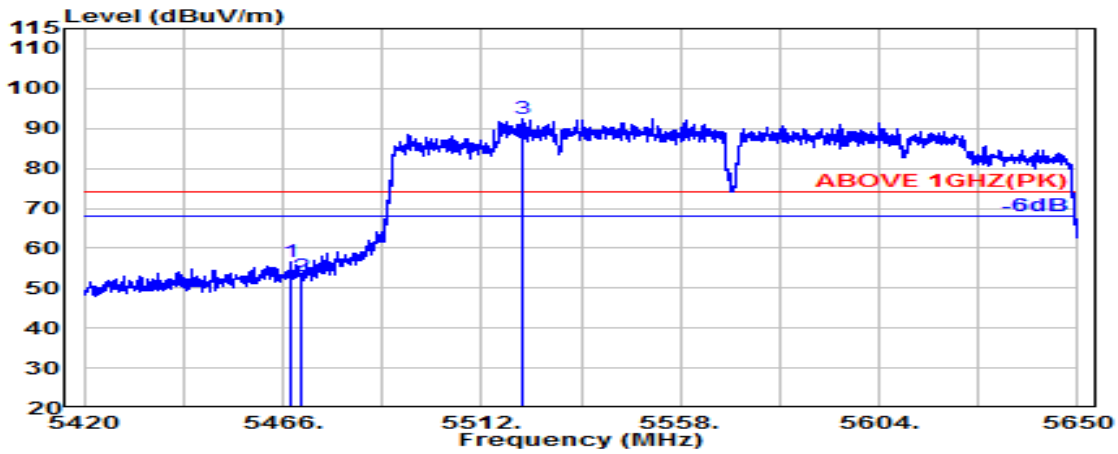

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.64	9.06	34.21	47.25	56.73	74.00	17.27	Peak
5470.000	34.64	9.06	34.21	43.52	53.01	74.00	20.99	Peak
@ 5521.400	34.70	9.09	34.21	82.89	92.46	---	---	Peak

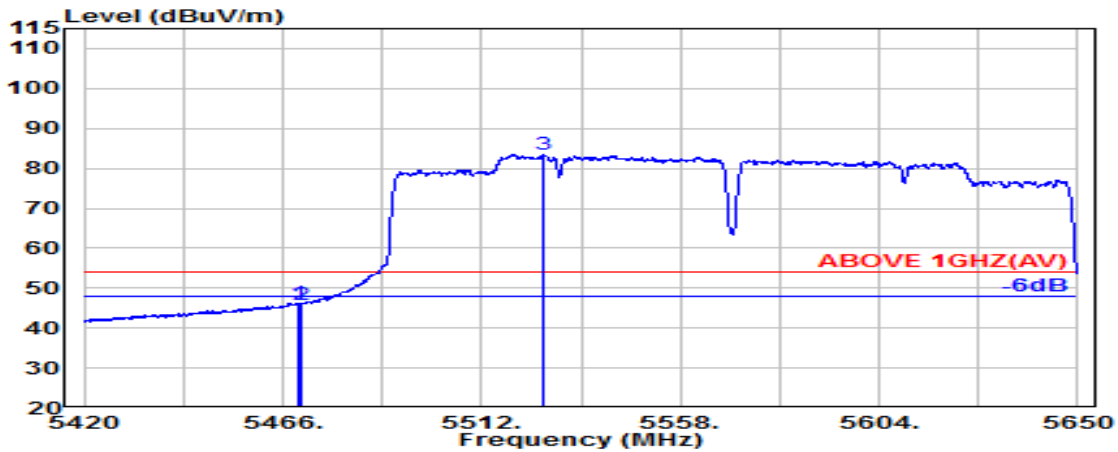


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.64	9.06	34.21	36.78	46.27	54.00	7.73	Average
5470.000	34.64	9.06	34.21	36.47	45.96	54.00	8.04	Average
@ 5526.100	34.70	9.09	34.21	73.90	83.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

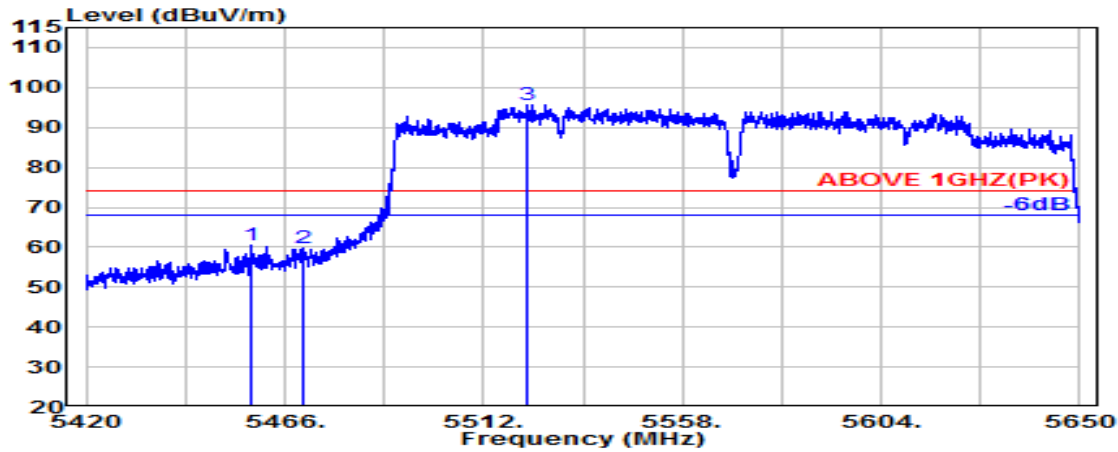

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.300	34.62	9.05	34.22	51.14	60.60	74.00	13.40	Peak
5470.000	34.64	9.06	34.21	50.32	59.81	74.00	14.19	Peak
@ 5522.100	34.70	9.09	34.21	86.24	95.82	---	---	Peak

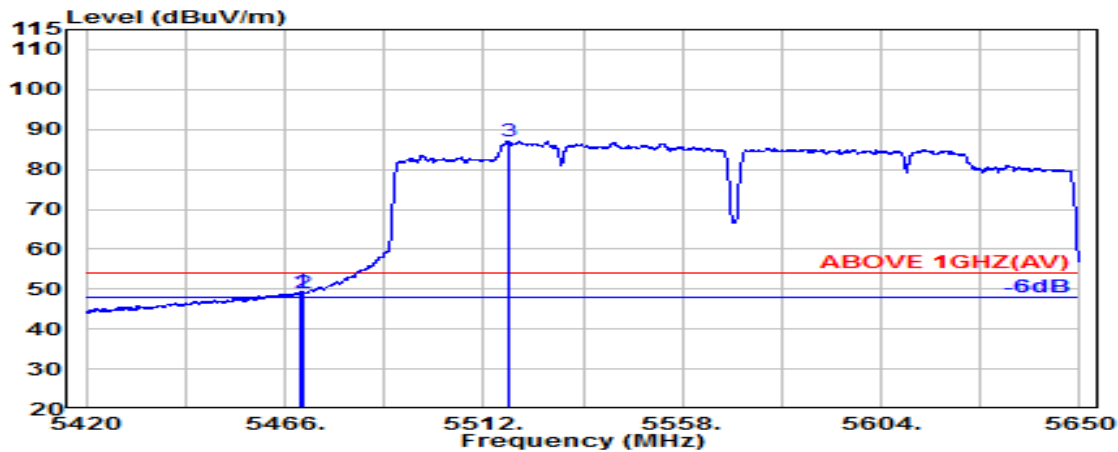


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.64	9.06	34.21	39.96	49.45	54.00	4.55	Average
5470.000	34.64	9.06	34.21	39.66	49.15	54.00	4.85	Average
@ 5518.000	34.70	9.09	34.21	77.46	87.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

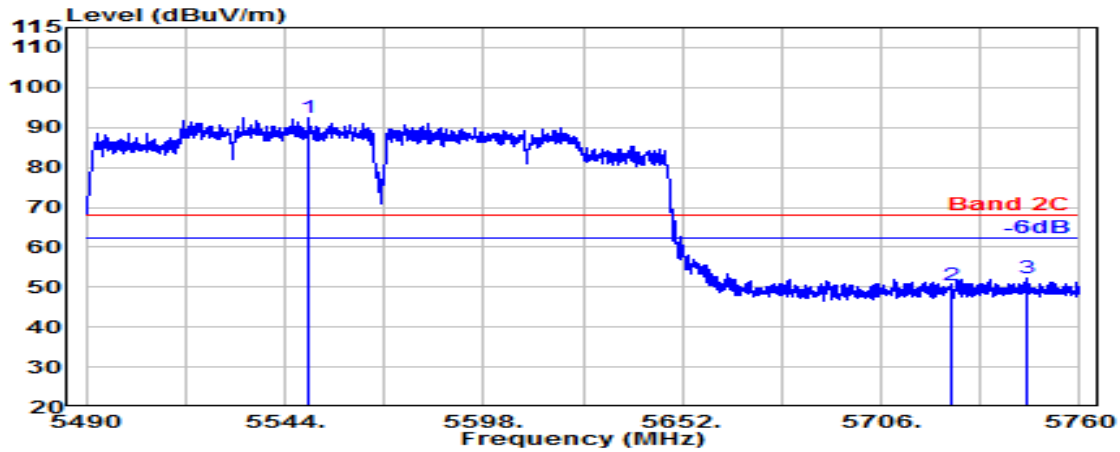

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5550.500	34.70	9.10	34.22	82.74	92.32	---	---	Peak
5725.000	34.85	9.19	34.31	40.79	50.53	68.20	17.67	Peak
5745.600	34.97	9.20	34.32	42.49	52.35	68.20	15.85	Peak

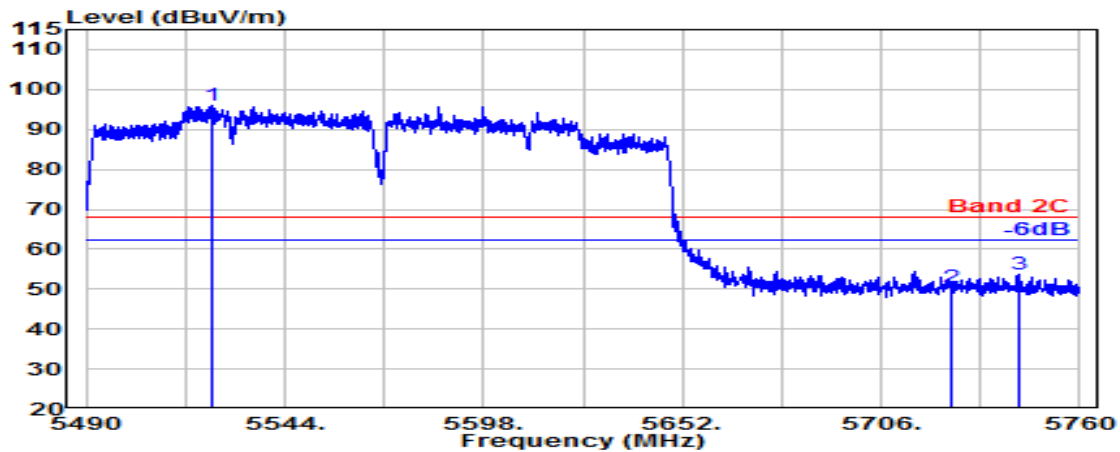


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5524.400	34.70	9.09	34.21	86.34	95.91	---	---	Peak
5725.000	34.85	9.19	34.31	40.70	50.44	68.20	17.76	Peak
5743.200	34.96	9.20	34.31	43.73	53.57	68.20	14.63	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

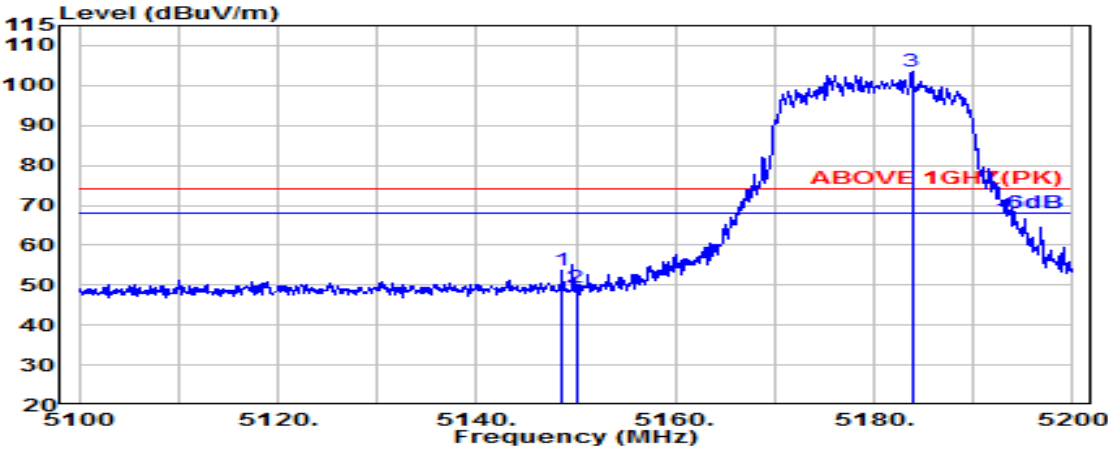

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.49	8.89	34.34	44.57	53.61	74.00	20.39	Peak
5150.000	34.50	8.89	34.34	40.28	49.33	74.00	24.67	Peak
@ 5183.800	34.64	8.90	34.32	94.24	103.46	---	---	Peak

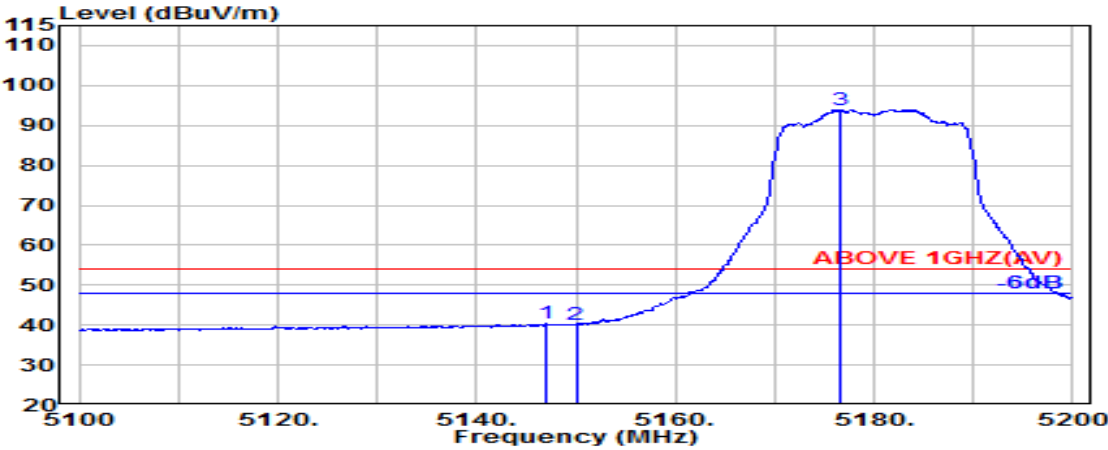


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	34.48	8.88	34.34	31.25	40.28	54.00	13.72	Average
5150.000	34.50	8.89	34.34	31.18	40.23	54.00	13.77	Average
@ 5176.500	34.61	8.90	34.33	84.72	93.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

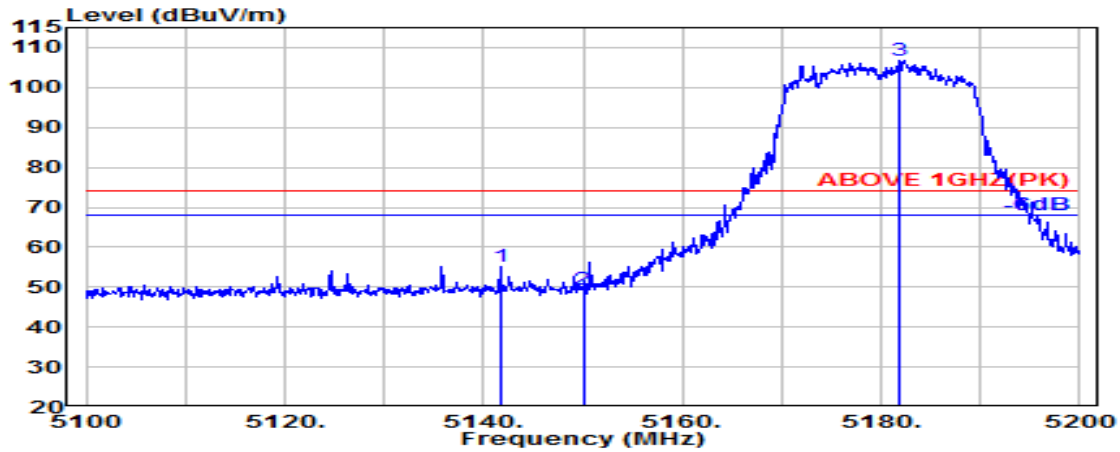

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.700	34.45	8.88	34.34	46.11	55.10	74.00	18.90	Peak
5150.000	34.50	8.89	34.34	40.36	49.41	74.00	24.59	Peak
@ 5181.900	34.63	8.90	34.33	97.56	106.77	---	---	Peak

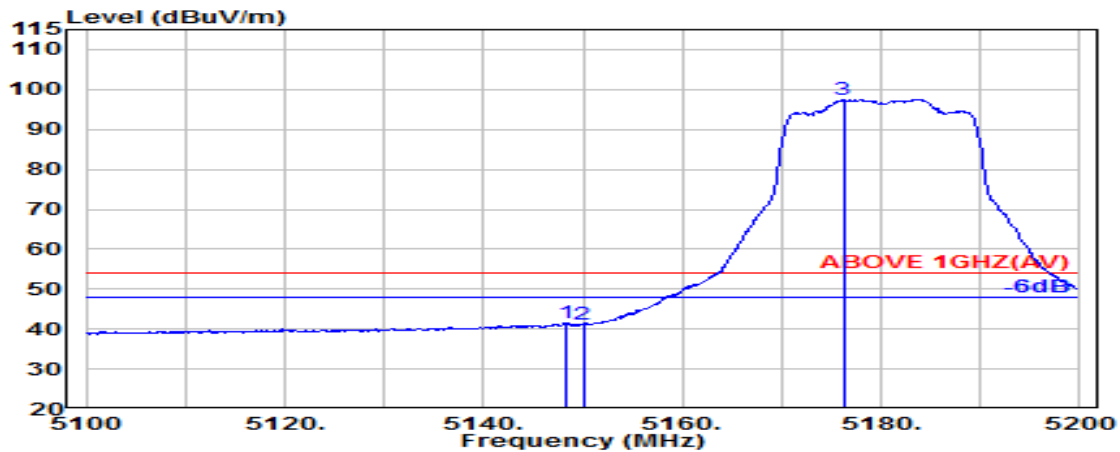


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	34.49	8.89	34.34	32.51	41.55	54.00	12.45	Average
5150.000	34.50	8.89	34.34	32.06	41.11	54.00	12.89	Average
@ 5176.200	34.61	8.90	34.33	88.31	97.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

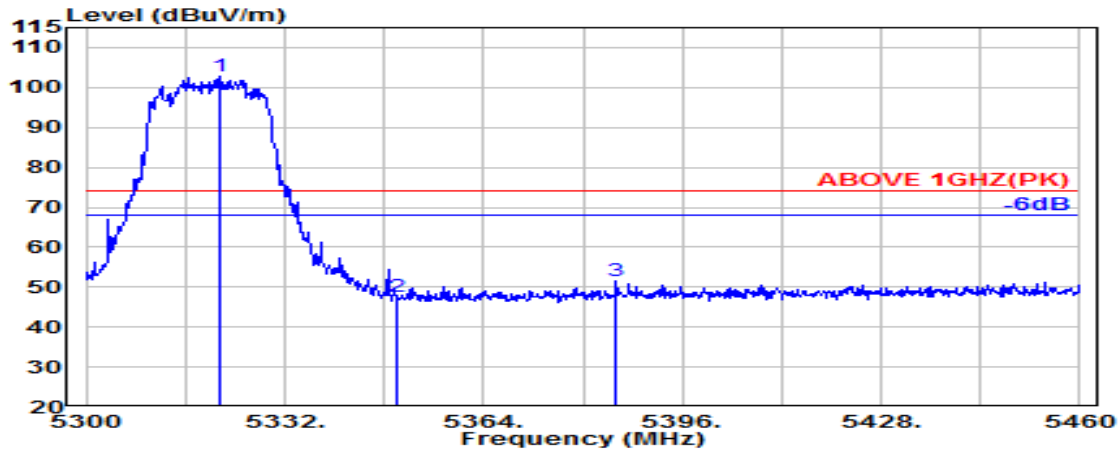

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.440	34.61	8.98	34.27	93.54	102.87	---	---	Peak
5350.000	34.90	9.00	34.26	38.10	47.74	74.00	26.26	Peak
5385.440	34.83	9.02	34.24	42.10	51.70	74.00	22.30	Peak

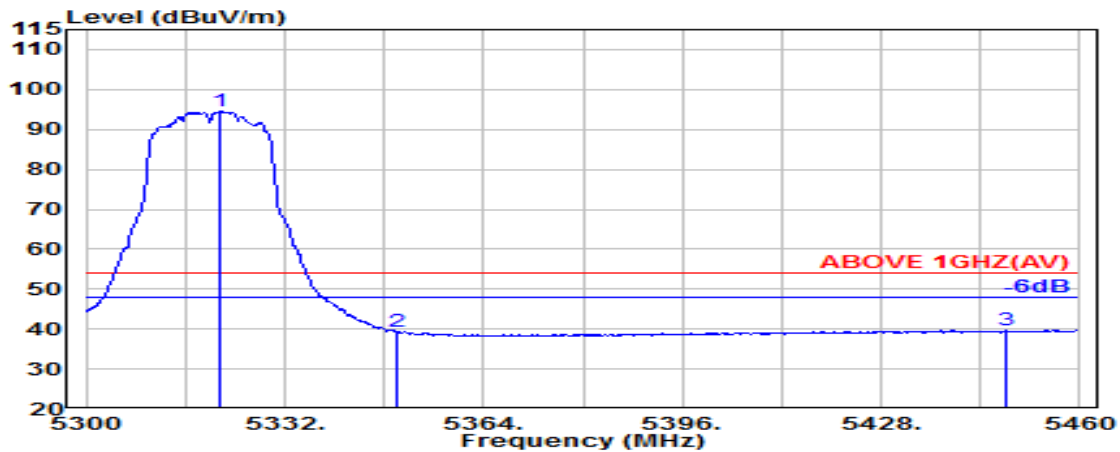


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.600	34.62	8.98	34.27	85.22	94.54	---	---	Average
5350.000	34.90	9.00	34.26	29.61	39.25	54.00	14.75	Average
5448.320	34.61	9.05	34.22	30.16	39.60	54.00	14.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

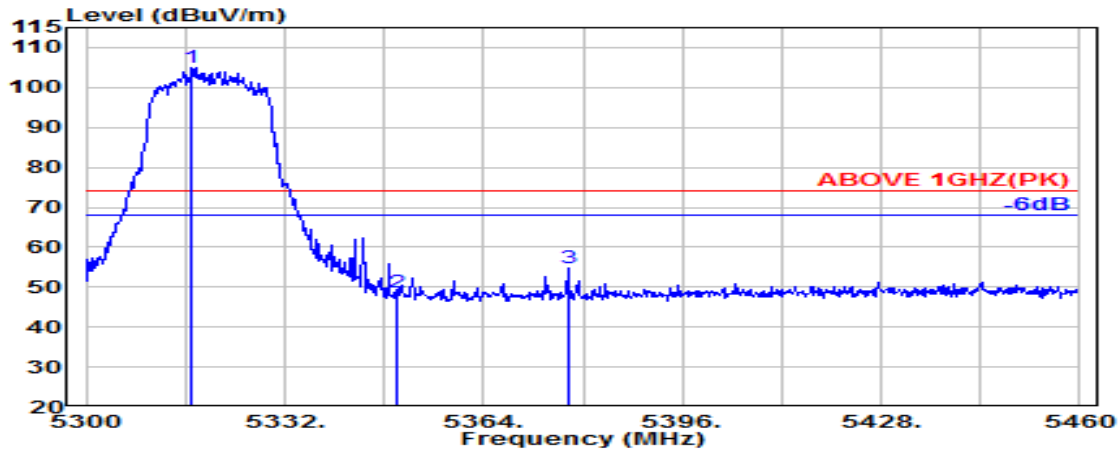

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.57	8.98	34.27	95.71	104.99	---	---	Peak
5350.000	34.90	9.00	34.26	38.94	48.58	74.00	25.42	Peak
5377.600	34.84	9.01	34.25	45.10	54.71	74.00	19.29	Peak

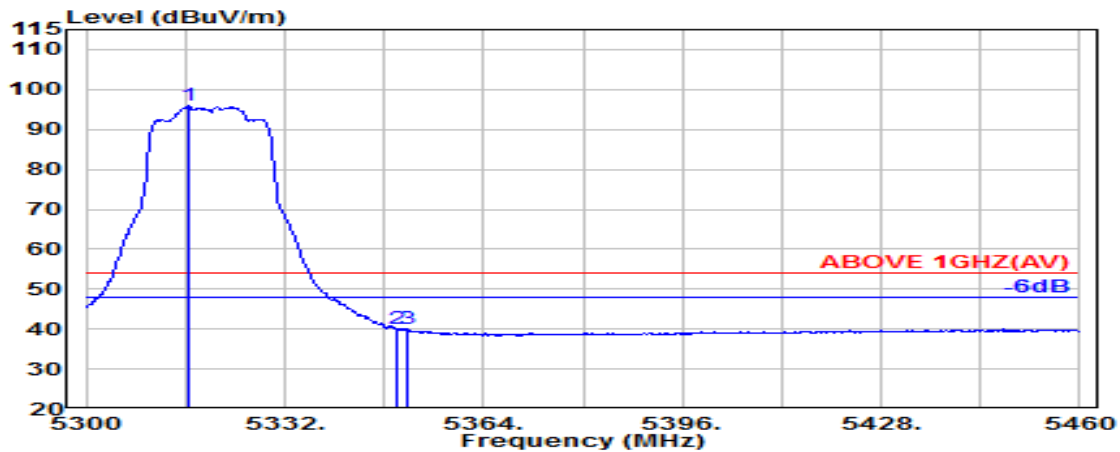


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.320	34.56	8.98	34.27	86.60	95.87	---	---	Average
5350.000	34.90	9.00	34.26	30.30	39.94	54.00	14.06	Average
5351.520	34.90	9.00	34.26	30.59	40.23	54.00	13.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

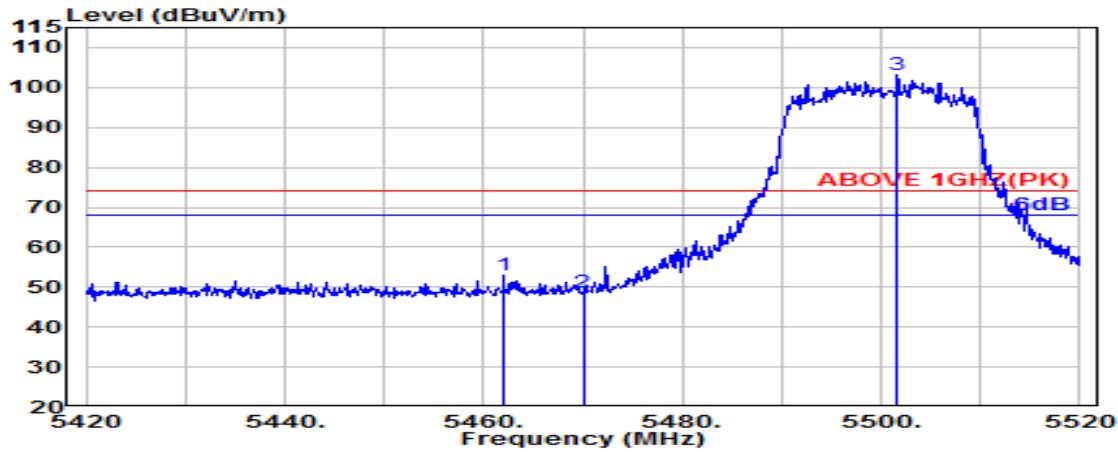

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.62	9.06	34.21	43.59	53.05	74.00	20.95	Peak
5470.000	34.64	9.06	34.21	39.30	48.79	74.00	25.21	Peak
@ 5501.600	34.70	9.08	34.20	93.55	103.12	---	---	Peak

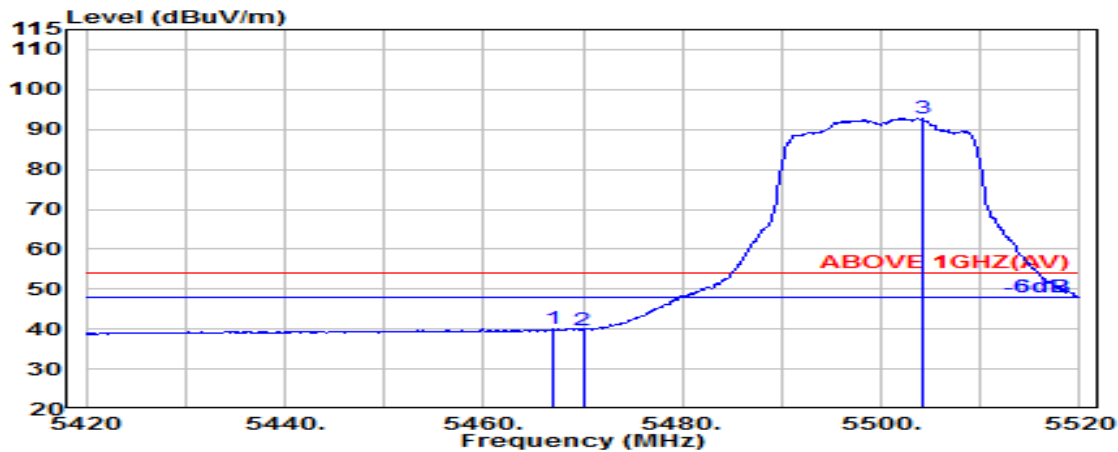


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.63	9.06	34.21	30.56	40.04	54.00	13.96	Average
5470.000	34.64	9.06	34.21	30.36	39.85	54.00	14.15	Average
@ 5504.100	34.70	9.08	34.20	83.26	92.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

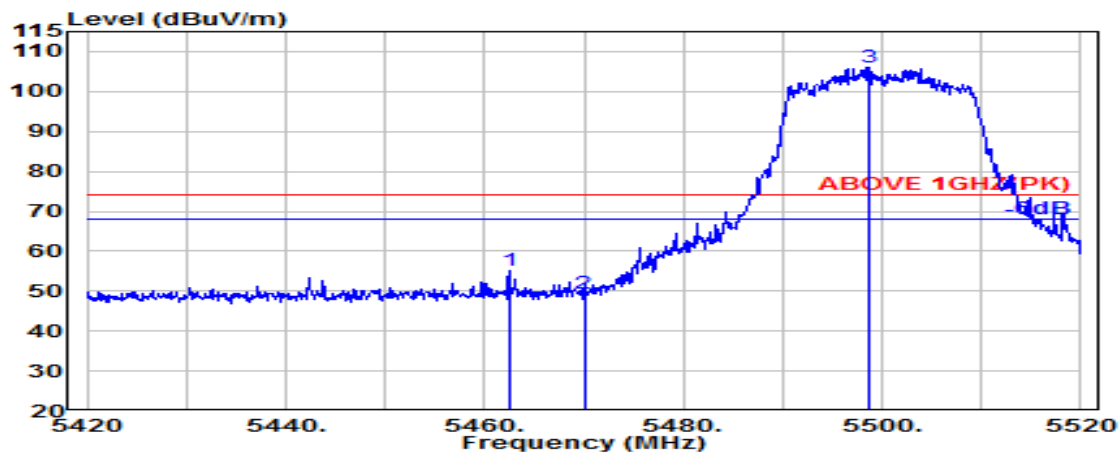

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.63	9.06	34.21	45.59	55.06	74.00	18.94	Peak
5470.000	34.64	9.06	34.21	40.01	49.50	74.00	24.50	Peak
@ 5498.600	34.70	9.08	34.20	96.60	106.17	---	---	Peak

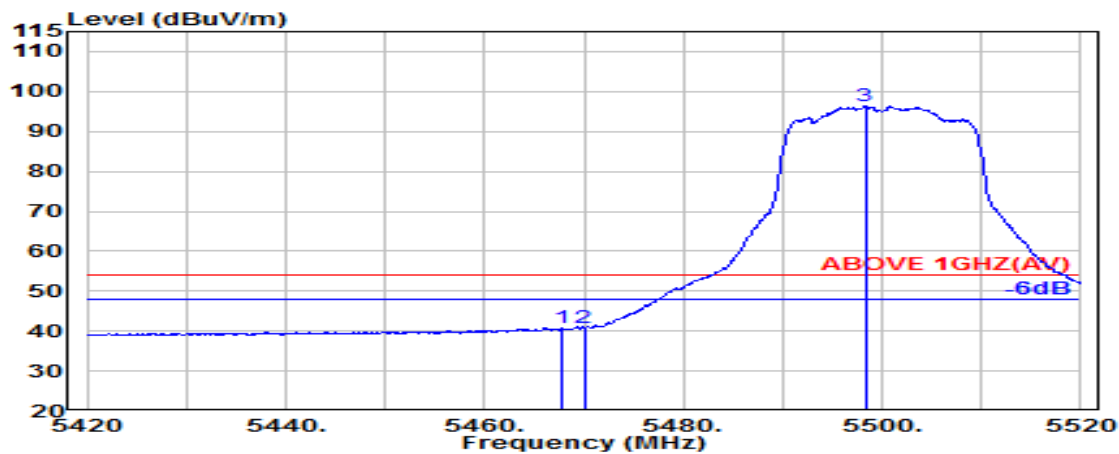


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.64	9.06	34.21	31.21	40.69	54.00	13.31	Average
5470.000	34.64	9.06	34.21	31.38	40.87	54.00	13.13	Average
@ 5498.300	34.70	9.08	34.20	86.74	96.31	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

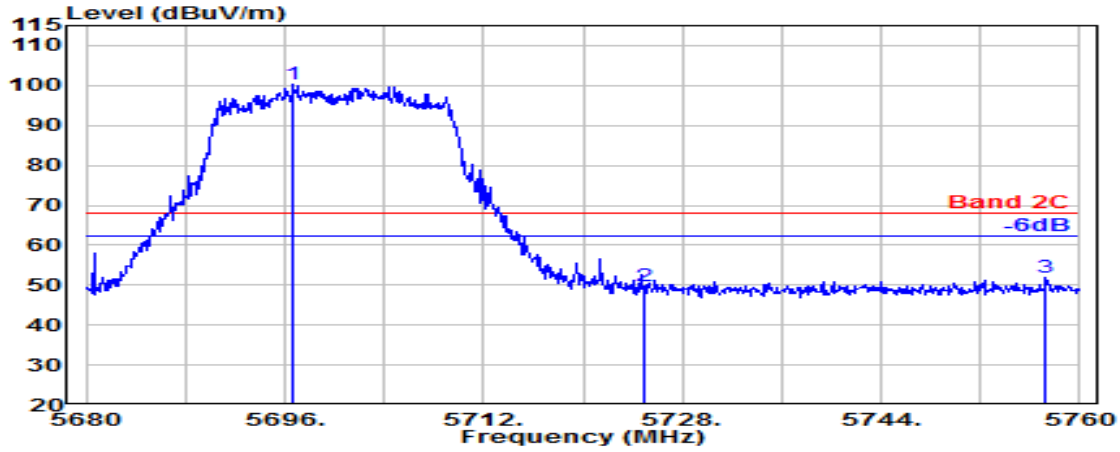

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.640	34.69	9.18	34.29	90.55	100.13	---	---	Peak
5725.000	34.85	9.19	34.31	40.04	49.78	68.20	18.42	Peak
5757.280	35.01	9.21	34.32	41.87	51.78	68.20	16.42	Peak

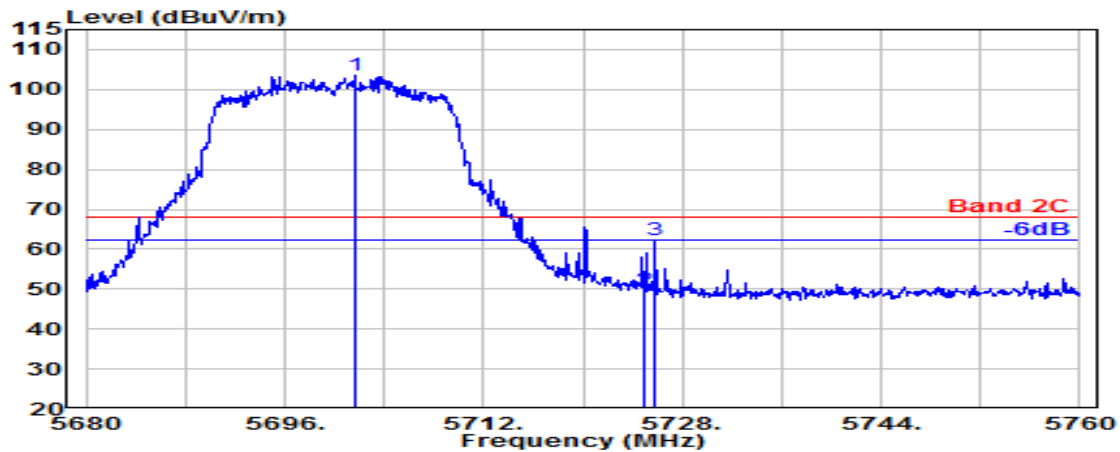


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.600	34.71	9.18	34.30	94.07	103.66	---	---	Peak
5725.000	34.85	9.19	34.31	39.97	49.70	68.20	18.50	Peak
5725.760	34.85	9.19	34.31	52.64	62.38	68.20	5.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

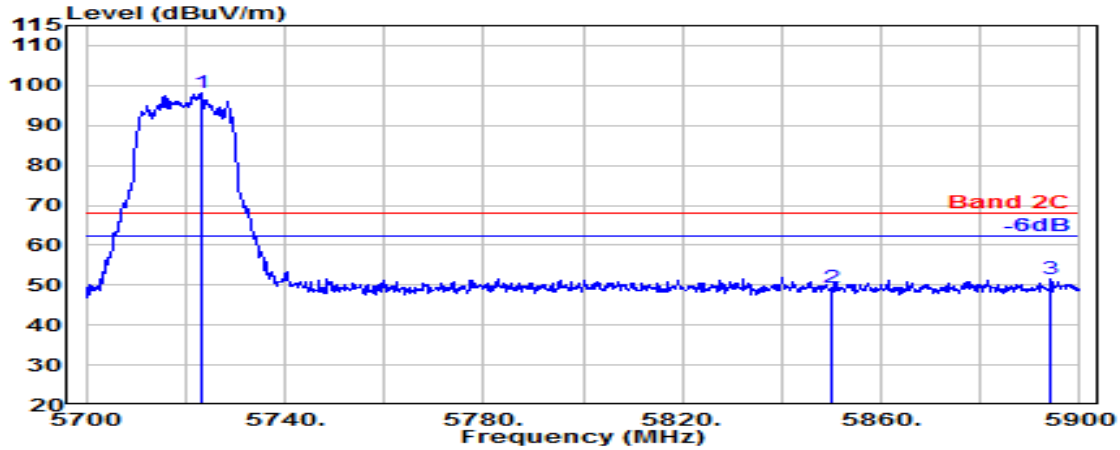

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.400	34.84	9.19	34.31	88.39	98.12	---	---	Peak
5850.000	35.40	9.26	34.36	38.94	49.23	68.20	18.97	Peak
5894.200	35.75	9.28	34.38	40.78	51.42	68.20	16.78	Peak

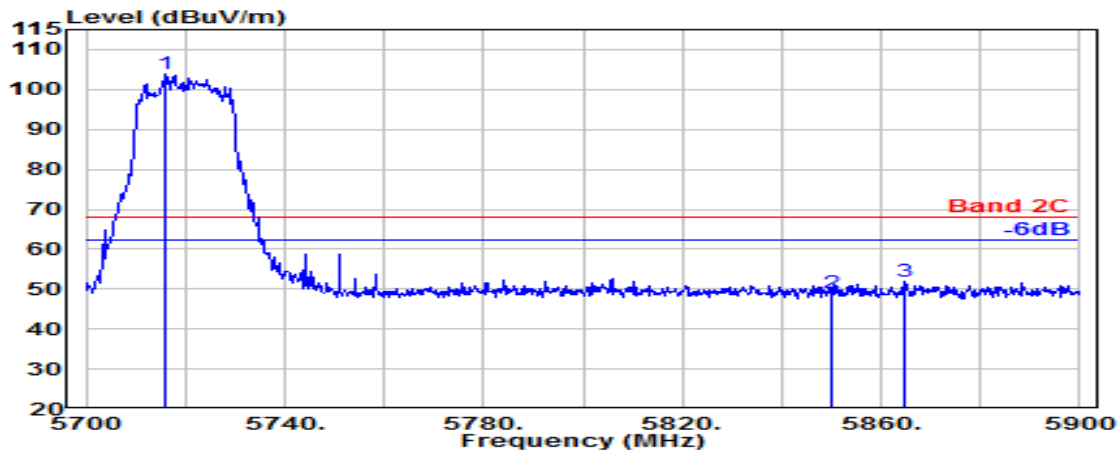


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.800	34.80	9.19	34.30	94.16	103.84	---	---	Peak
5850.000	35.40	9.26	34.36	38.60	48.89	68.20	19.31	Peak
5864.600	35.52	9.26	34.37	41.45	51.86	68.20	16.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

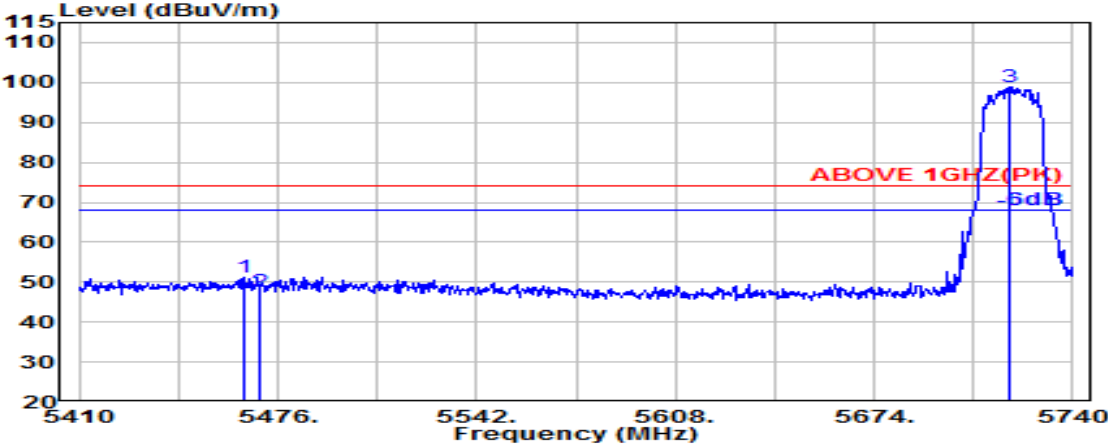

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	34.63	9.06	34.21	41.67	51.14	74.00	22.86	Peak
5470.000	34.64	9.06	34.21	38.27	47.76	74.00	26.24	Peak
@ 5718.550	34.81	9.19	34.30	89.10	98.79	---	---	Peak

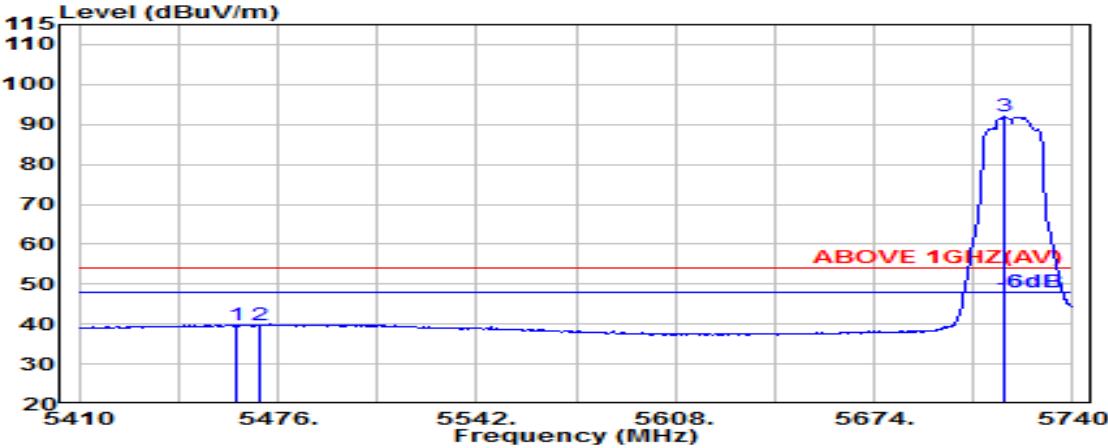


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.810	34.62	9.06	34.21	30.34	39.81	54.00	14.19	Average
5470.000	34.64	9.06	34.21	30.22	39.71	54.00	14.29	Average
@ 5716.900	34.80	9.19	34.30	82.23	91.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

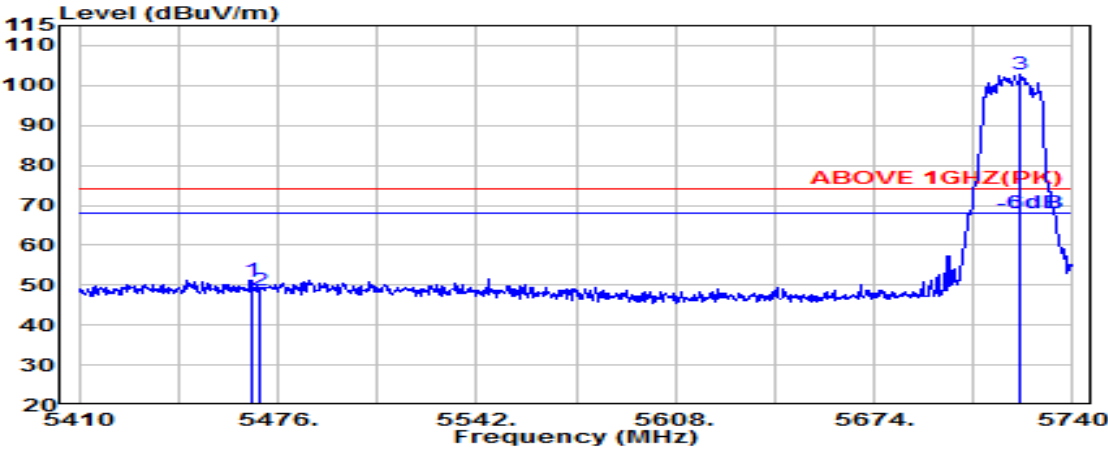

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.090	34.63	9.06	34.21	41.64	51.12	74.00	22.88	Peak
5470.000	34.64	9.06	34.21	39.06	48.55	74.00	25.45	Peak
@ 5722.510	34.84	9.19	34.30	93.25	102.97	---	---	Peak

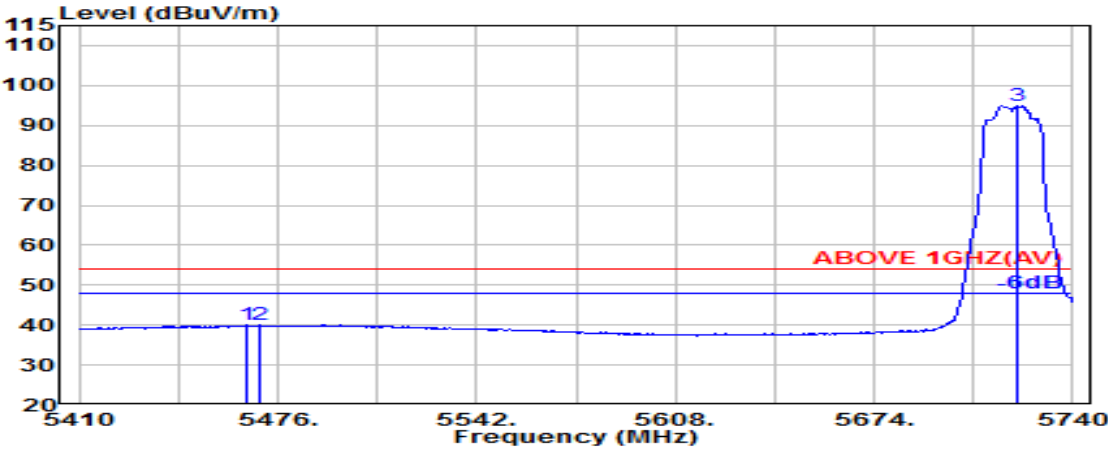


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.770	34.63	9.06	34.21	30.45	39.93	54.00	14.07	Average
5470.000	34.64	9.06	34.21	30.52	40.01	54.00	13.99	Average
@ 5721.850	34.83	9.19	34.30	85.29	95.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

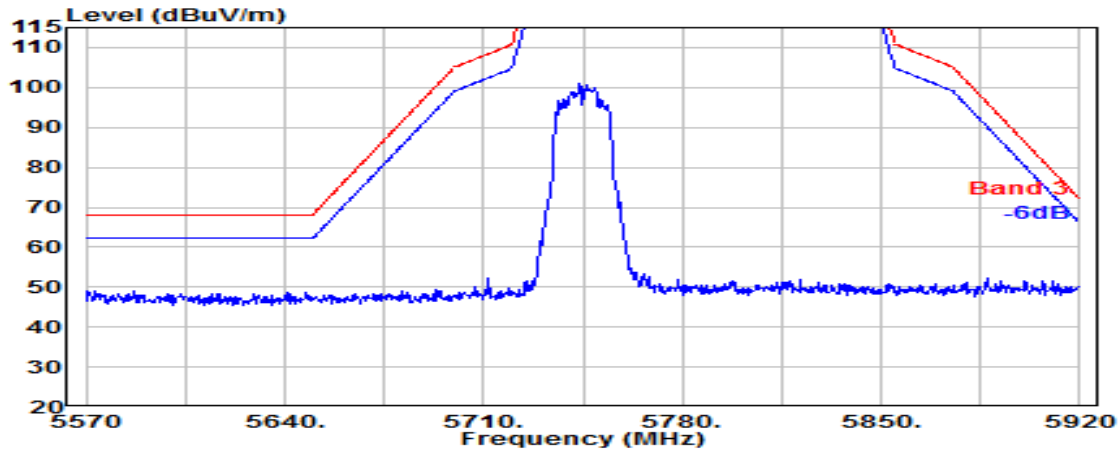


Antenna at Vertical Polarization

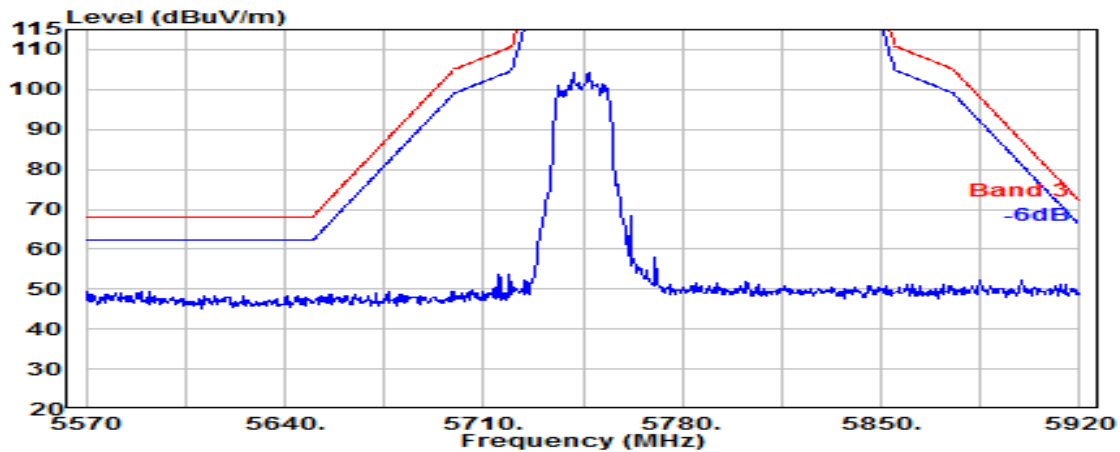


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

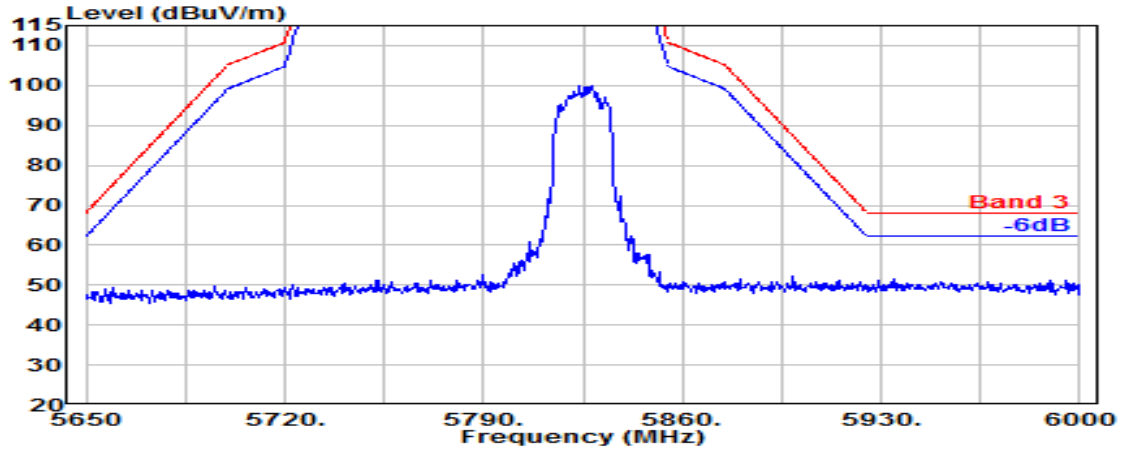

Antenna at Vertical Polarization

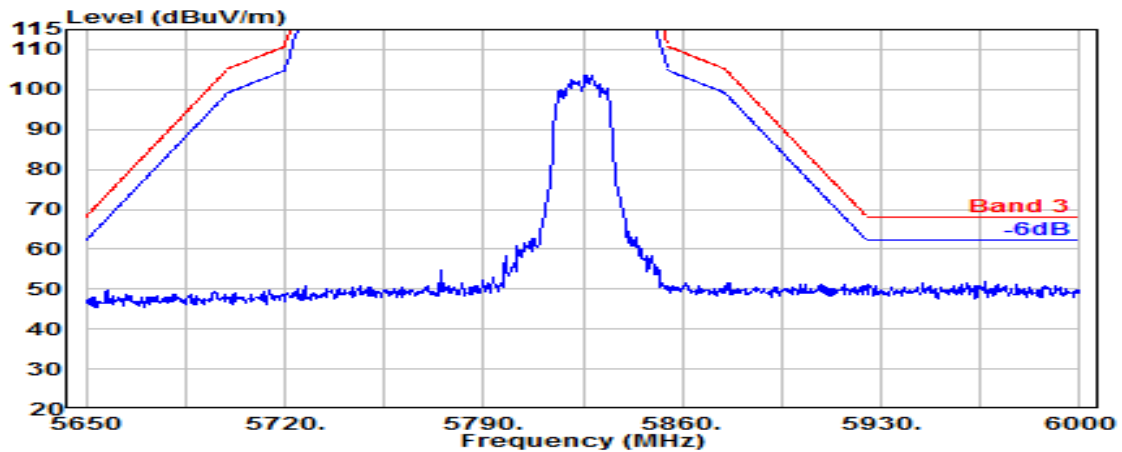


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

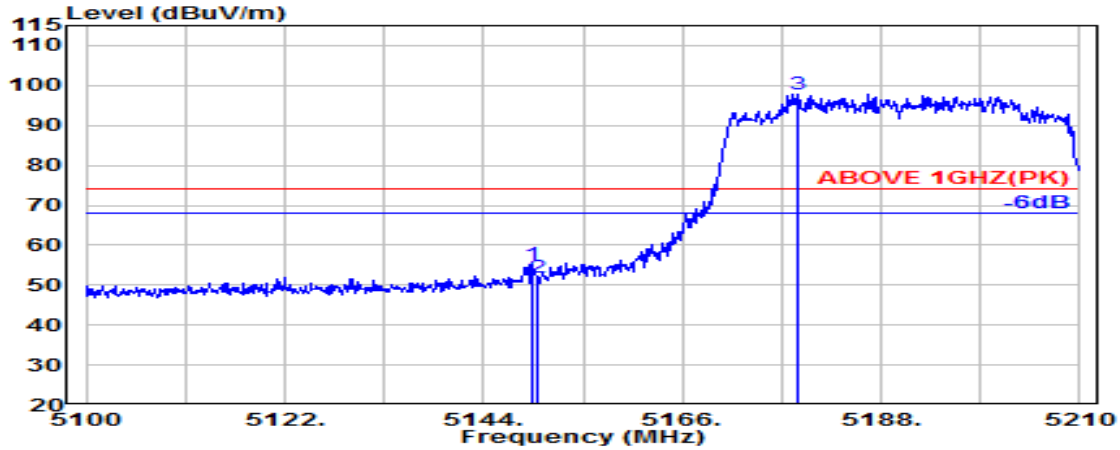

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.89	34.34	46.16	55.20	74.00	18.80	Peak
5150.000	34.50	8.89	34.34	42.73	51.78	74.00	22.22	Peak
@ 5178.760	34.62	8.90	34.33	88.74	97.94	---	---	Peak

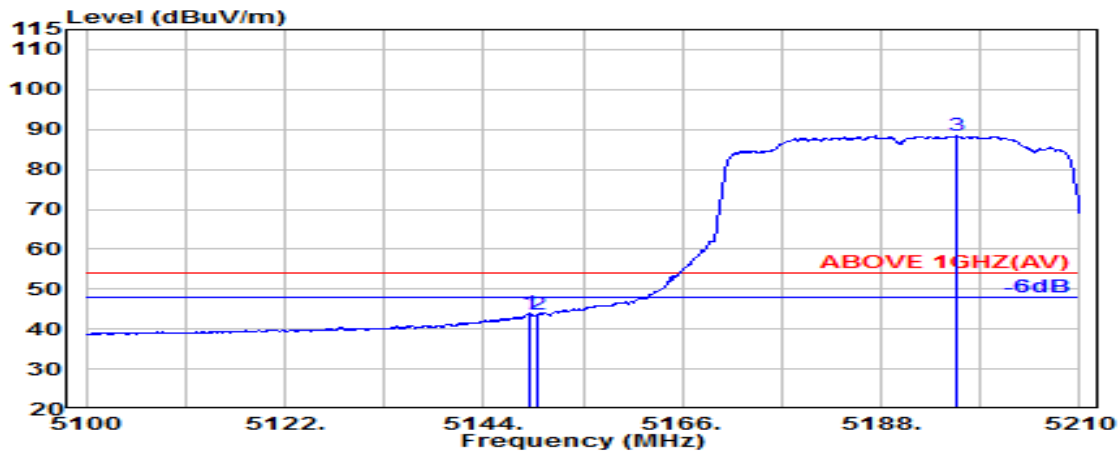


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.50	8.89	34.34	34.85	43.89	54.00	10.11	Average
5150.000	34.50	8.89	34.34	34.51	43.56	54.00	10.44	Average
@ 5196.470	34.69	8.91	34.32	79.05	88.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

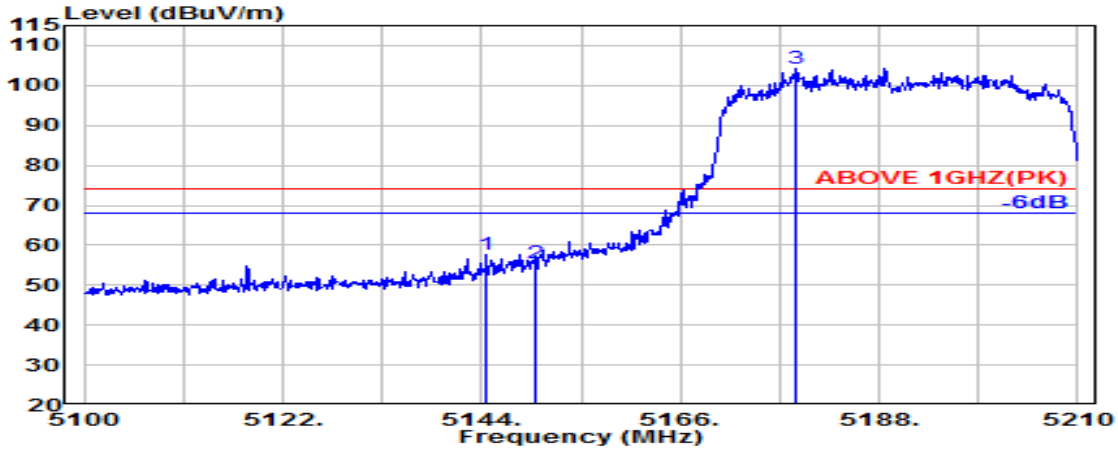

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5144.550	34.47	8.88	34.34	48.62	57.63	74.00	16.37	Peak
5150.000	34.50	8.89	34.34	46.58	55.63	74.00	18.37	Peak
@ 5178.870	34.62	8.90	34.33	95.13	104.32	---	---	Peak

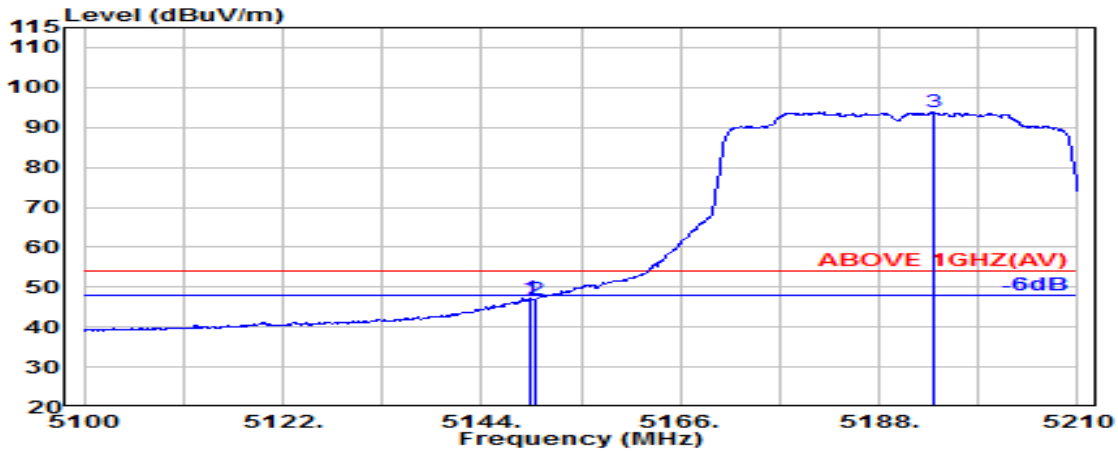


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	34.50	8.89	34.34	38.34	47.39	54.00	6.61	Average
5150.000	34.50	8.89	34.34	37.89	46.94	54.00	7.06	Average
@ 5194.050	34.68	8.91	34.32	84.57	93.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

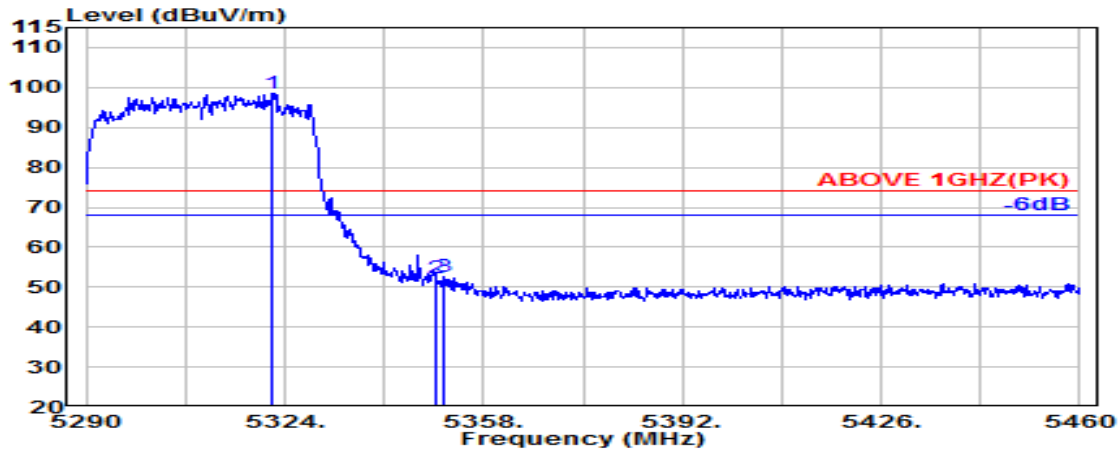

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.960	34.62	8.98	34.27	89.08	98.41	---	---	Peak
5350.000	34.90	9.00	34.26	42.69	52.33	74.00	21.67	Peak
5351.200	34.90	9.00	34.26	43.14	52.78	74.00	21.22	Peak

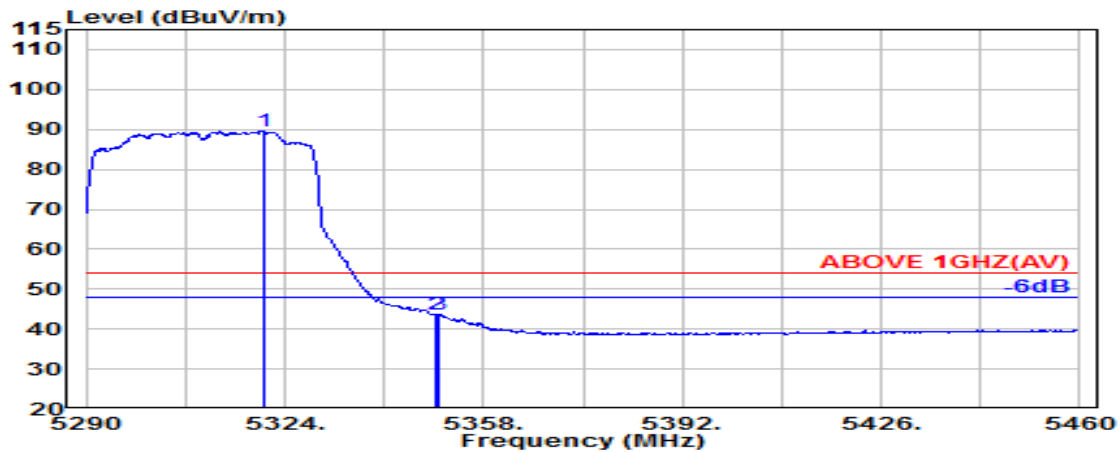


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.260	34.60	8.98	34.27	80.25	89.56	---	---	Average
5350.000	34.90	9.00	34.26	33.99	43.63	54.00	10.37	Average
5350.180	34.90	9.00	34.26	34.03	43.66	54.00	10.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

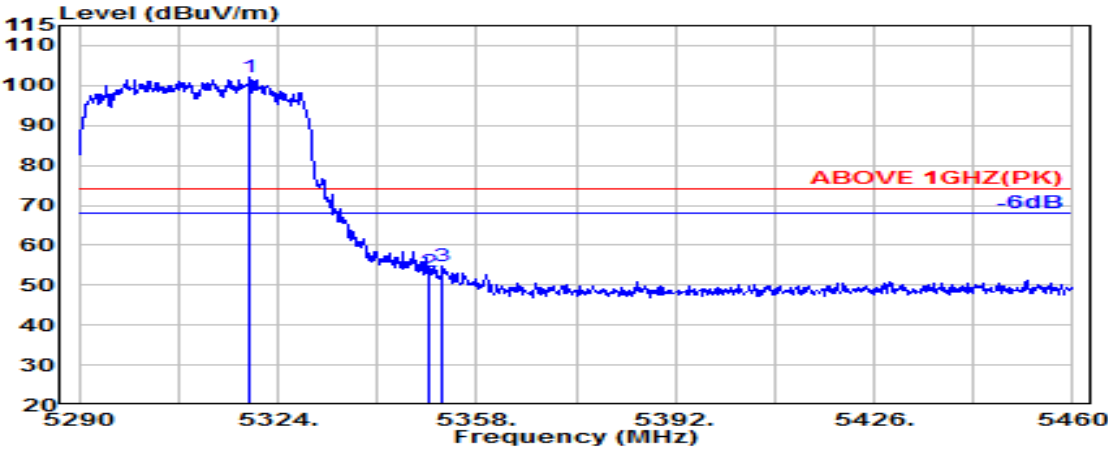

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.070	34.59	8.98	34.27	92.64	101.94	---	---	Peak
5350.000	34.90	9.00	34.26	43.58	53.22	74.00	20.78	Peak
5352.050	34.90	9.00	34.26	45.26	54.90	74.00	19.10	Peak

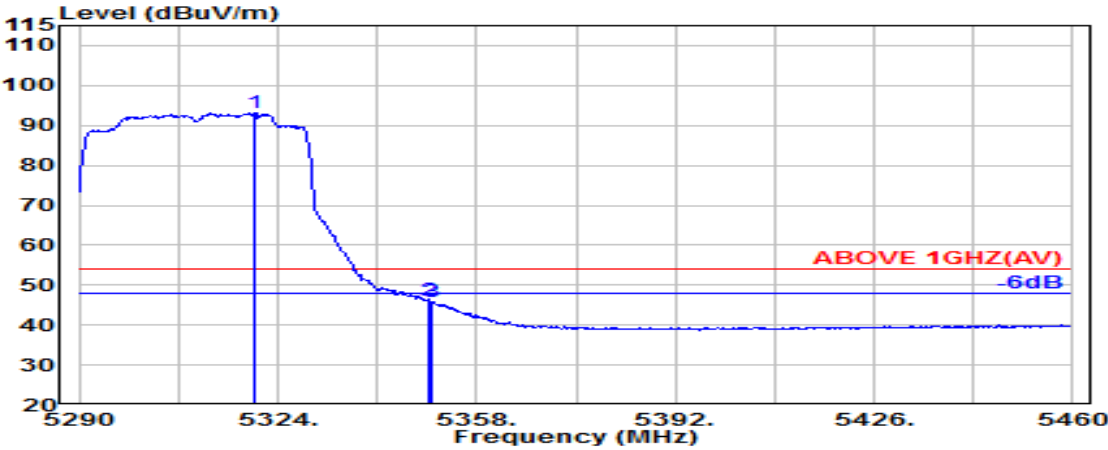


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.920	34.60	8.98	34.27	83.73	93.04	---	---	Average
5350.000	34.90	9.00	34.26	36.55	46.19	54.00	7.81	Average
5350.350	34.90	9.00	34.26	36.33	45.97	54.00	8.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

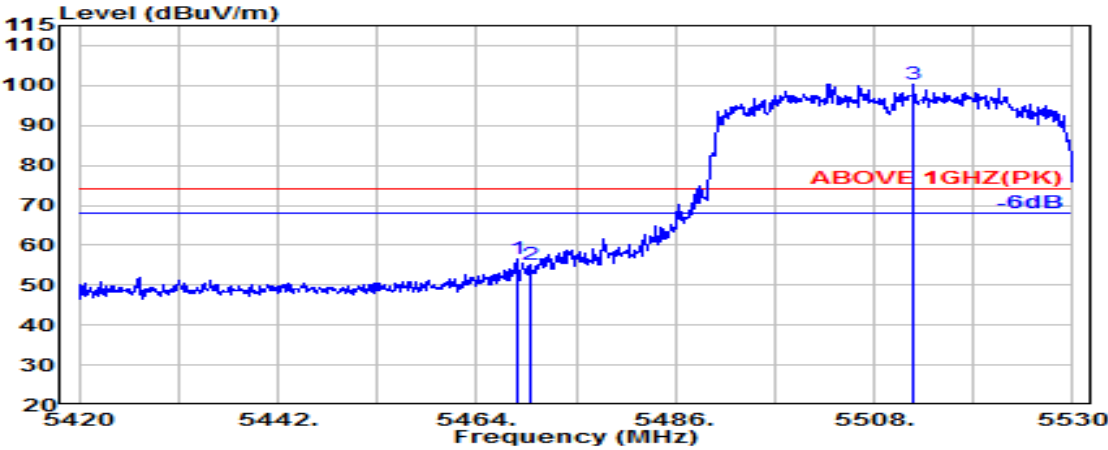

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.64	9.06	34.21	47.12	56.61	74.00	17.39	Peak
5470.000	34.64	9.06	34.21	45.77	55.26	74.00	18.74	Peak
@ 5512.400	34.70	9.08	34.21	90.79	100.36	---	---	Peak

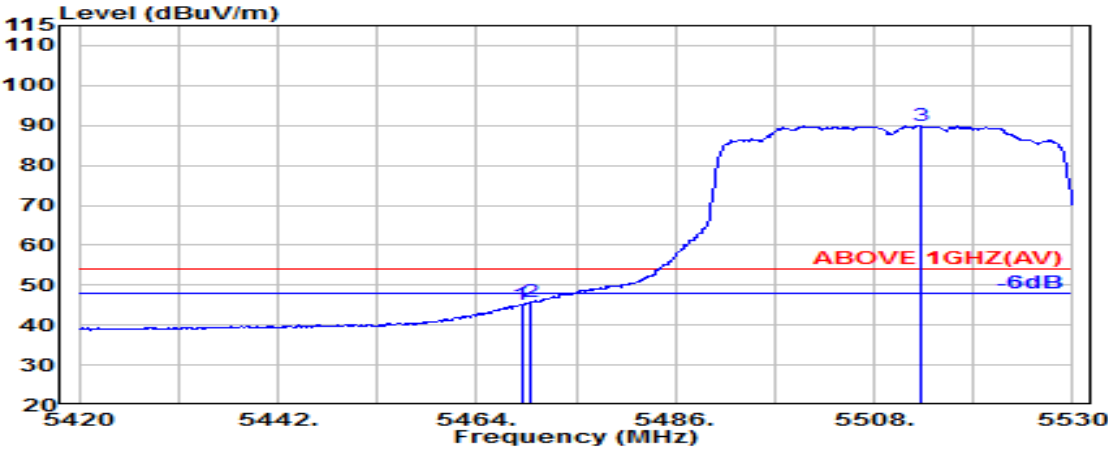


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.64	9.06	34.21	35.50	44.99	54.00	9.01	Average
5470.000	34.64	9.06	34.21	36.19	45.68	54.00	8.32	Average
@ 5513.170	34.70	9.08	34.21	80.50	90.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

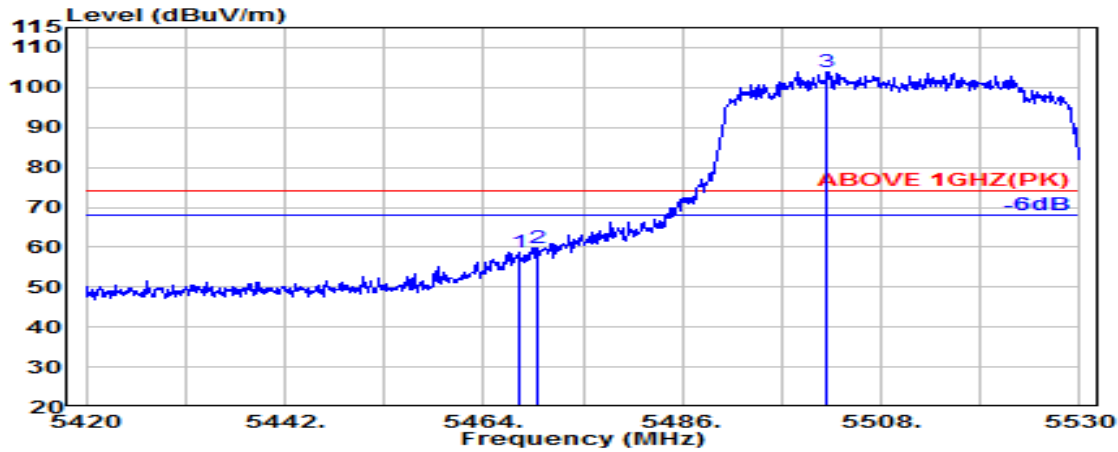

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.64	9.06	34.21	49.26	58.75	74.00	15.25	Peak
5470.000	34.64	9.06	34.21	50.15	59.64	74.00	14.36	Peak
@ 5501.950	34.70	9.08	34.20	94.47	104.04	---	---	Peak

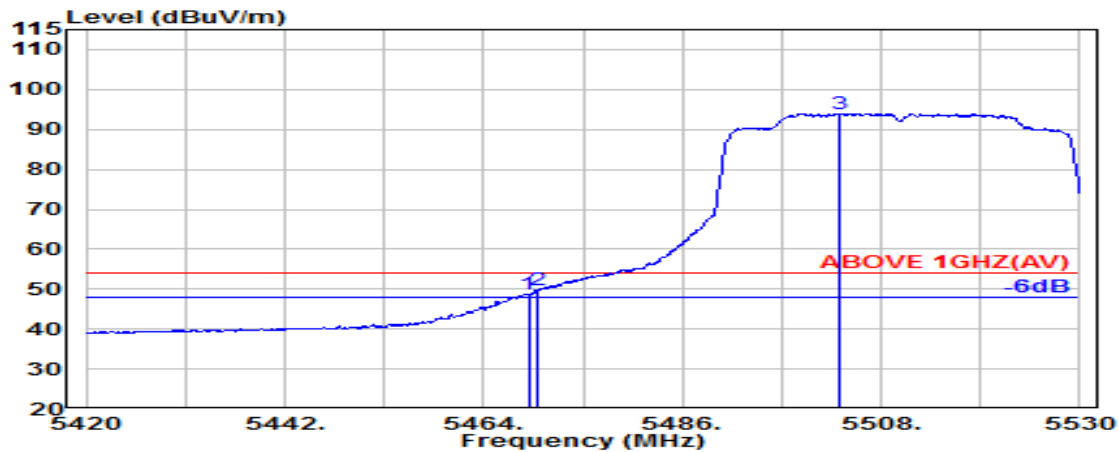


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.64	9.06	34.21	39.34	48.83	54.00	5.17	Average
5470.000	34.64	9.06	34.21	40.17	49.66	54.00	4.34	Average
@ 5503.270	34.70	9.08	34.20	84.43	94.00	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

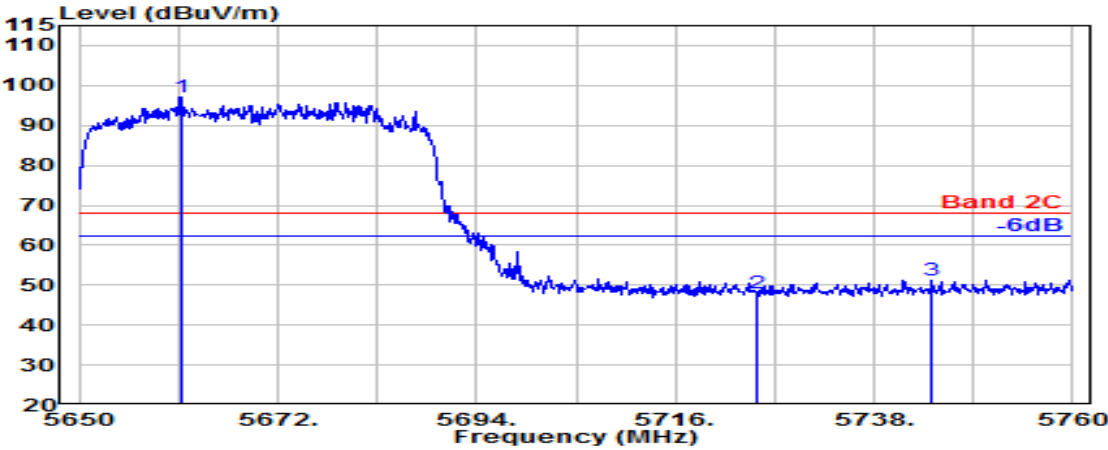

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.220	34.55	9.16	34.28	87.58	97.01	---	---	Peak
5725.000	34.85	9.19	34.31	38.10	47.84	68.20	20.36	Peak
5744.380	34.97	9.20	34.31	41.48	51.34	68.20	16.86	Peak

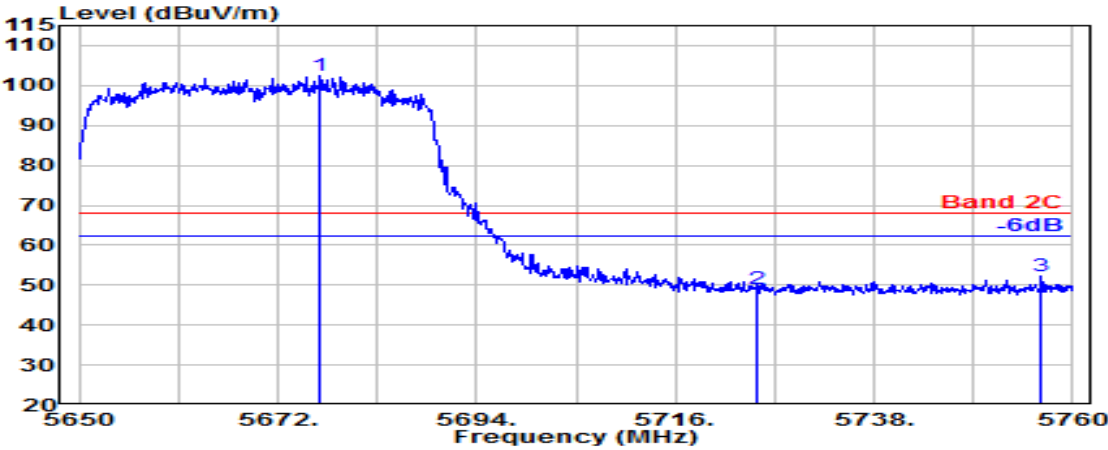


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.730	34.61	9.17	34.28	92.84	102.33	---	---	Peak
5725.000	34.85	9.19	34.31	39.28	49.01	68.20	19.19	Peak
5756.480	35.01	9.21	34.32	42.28	52.18	68.20	16.02	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

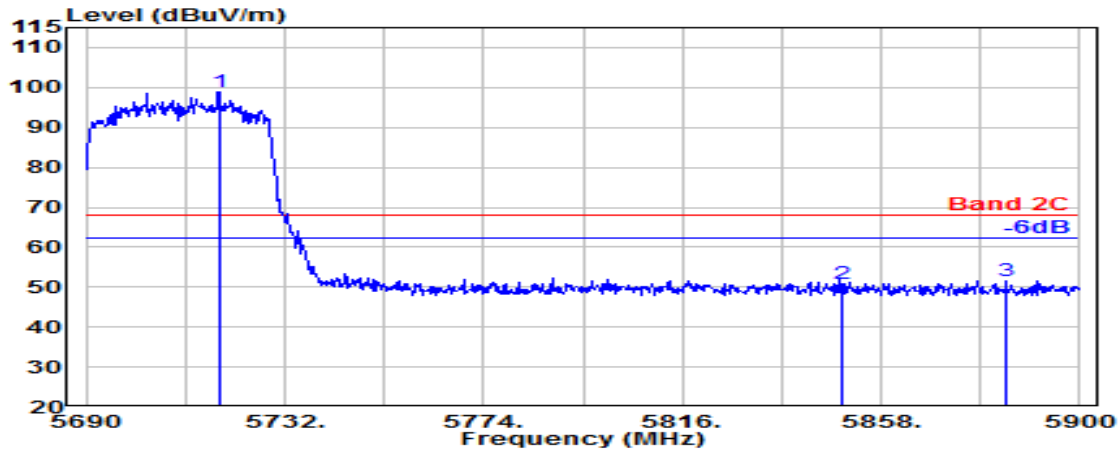

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.140	34.81	9.19	34.30	89.28	98.98	---	---	Peak
5850.000	35.40	9.26	34.36	40.49	50.78	68.20	17.42	Peak
5884.460	35.68	9.27	34.38	41.02	51.60	68.20	16.60	Peak

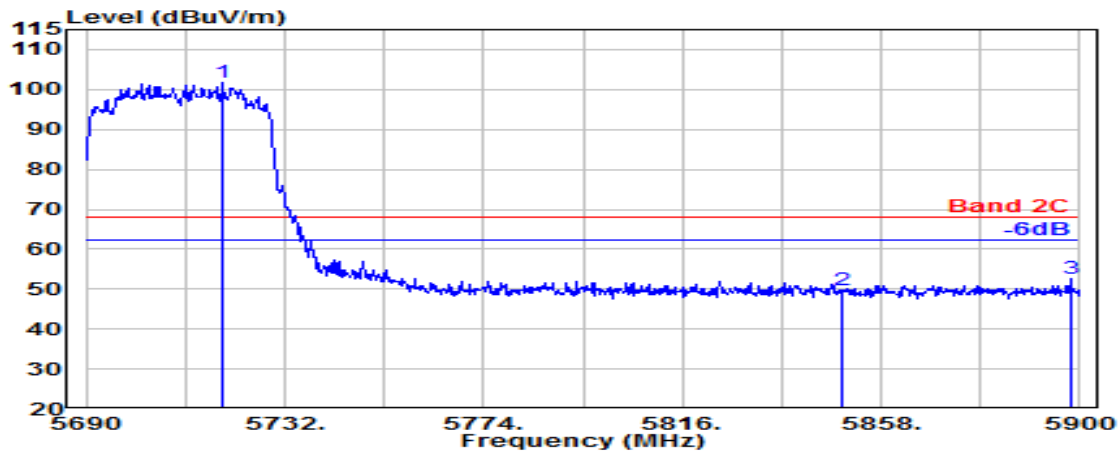


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.770	34.81	9.19	34.30	91.91	101.61	---	---	Peak
5850.000	35.40	9.26	34.36	39.46	49.75	68.20	18.45	Peak
5897.900	35.78	9.28	34.38	42.02	52.70	68.20	15.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

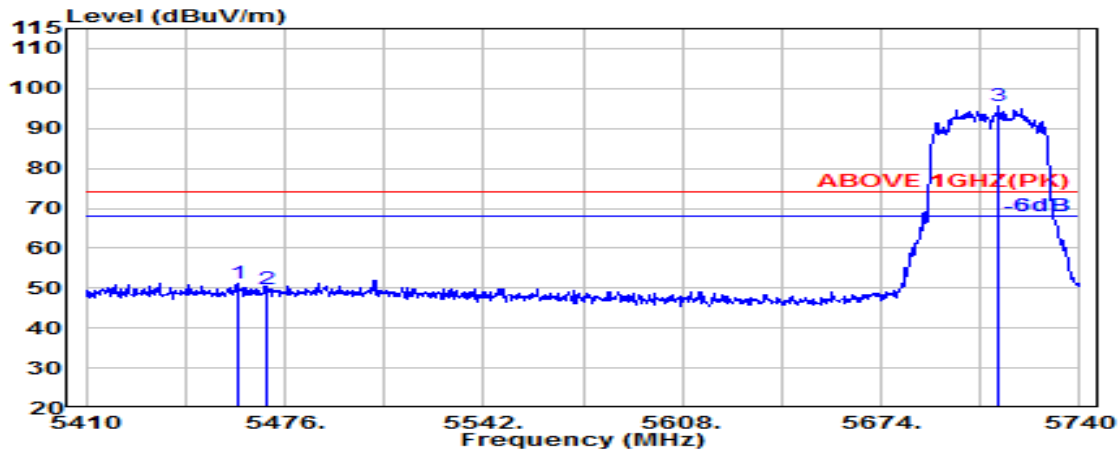

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.160	34.62	9.06	34.22	41.67	51.13	74.00	22.87	Peak
5470.000	34.64	9.06	34.21	40.31	49.80	74.00	24.20	Peak
@ 5713.270	34.78	9.19	34.30	85.87	95.53	---	---	Peak

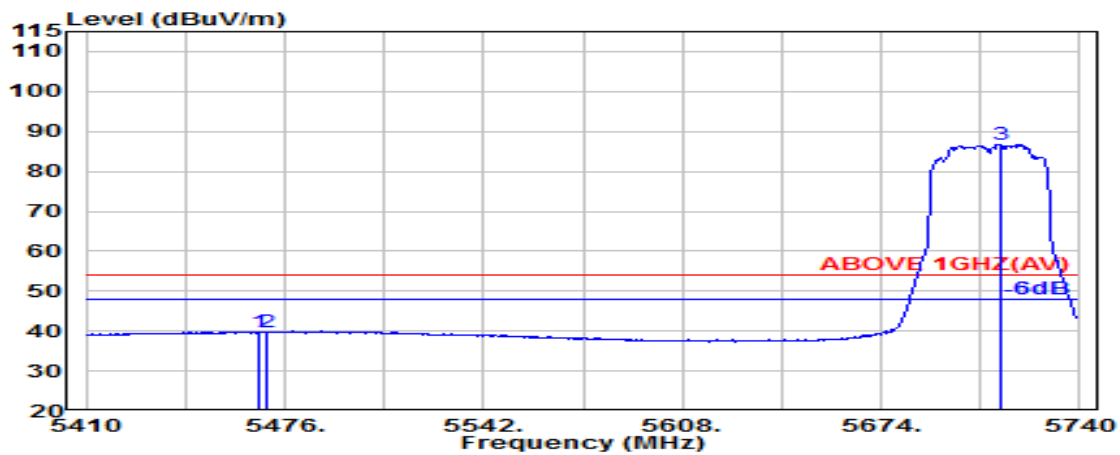


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.64	9.06	34.21	30.41	39.89	54.00	14.11	Peak
5470.000	34.64	9.06	34.21	30.39	39.88	54.00	14.12	Peak
@ 5713.600	34.78	9.19	34.30	77.09	86.76	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

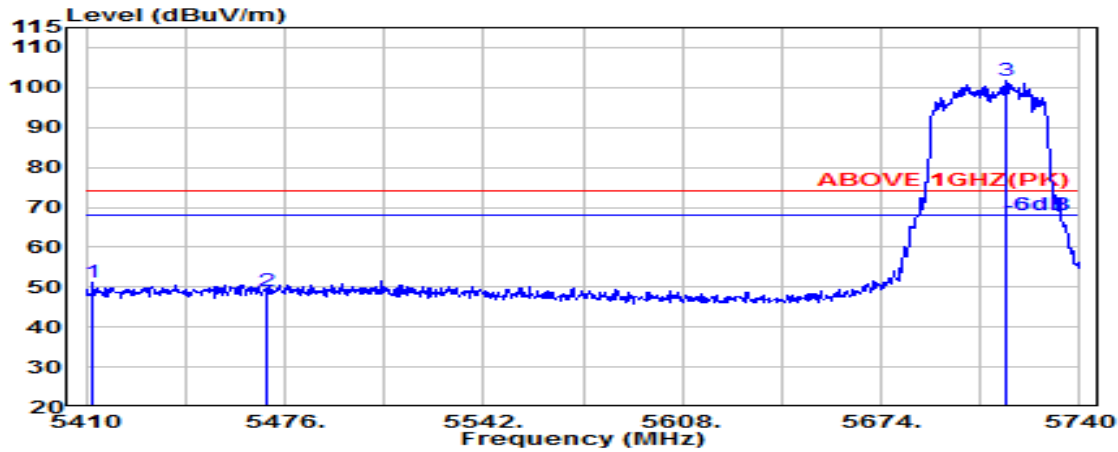

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.310	34.75	9.03	34.23	41.73	51.27	74.00	22.73	Peak
5470.000	34.64	9.06	34.21	39.41	48.90	74.00	25.10	Peak
@ 5715.910	34.80	9.19	34.30	92.13	101.81	---	---	Peak

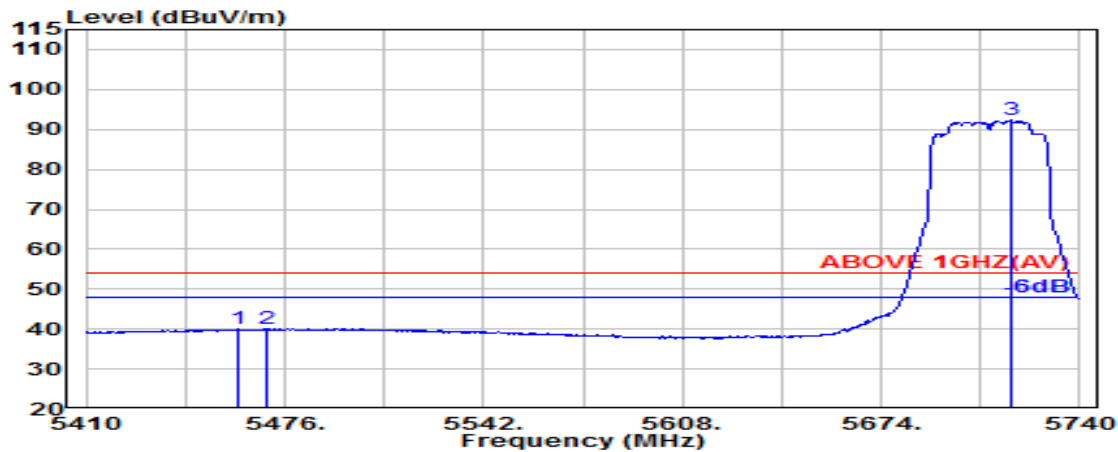


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.490	34.62	9.06	34.22	30.48	39.94	54.00	14.06	Peak
5470.000	34.64	9.06	34.21	30.43	39.92	54.00	14.08	Peak
@ 5716.900	34.80	9.19	34.30	82.73	92.42	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

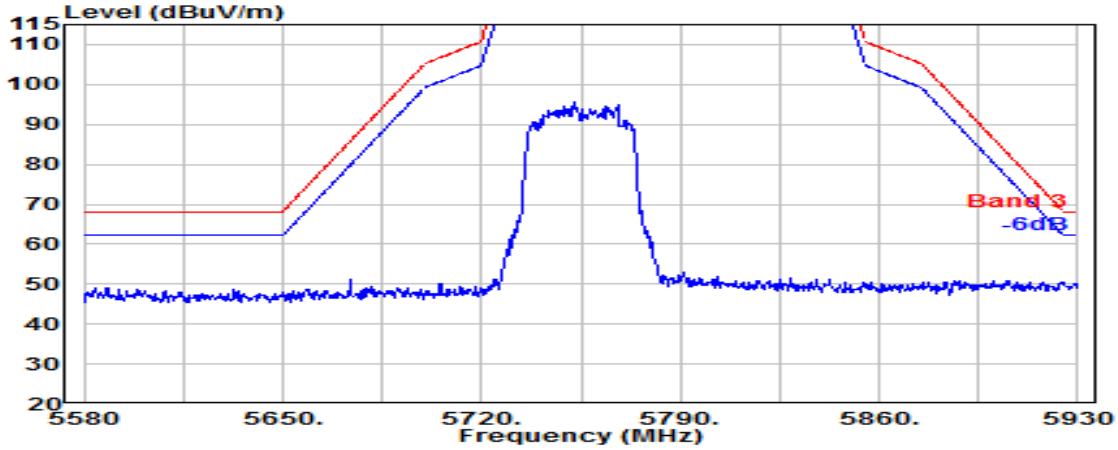


Antenna at Vertical Polarization

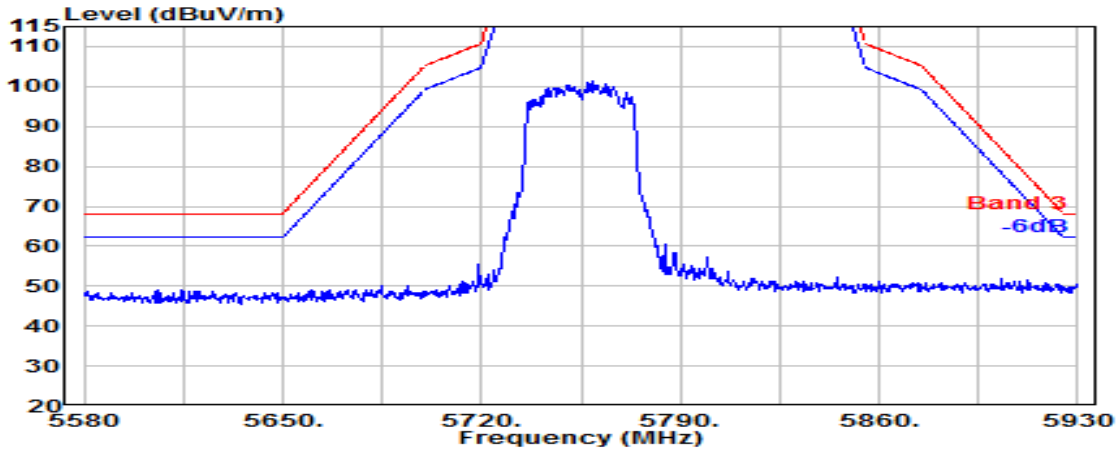


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

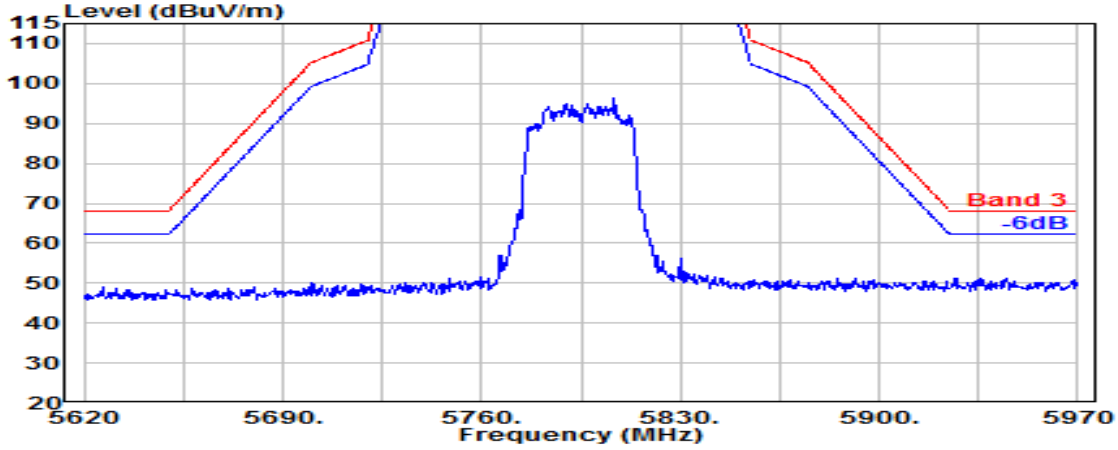

Antenna at Vertical Polarization

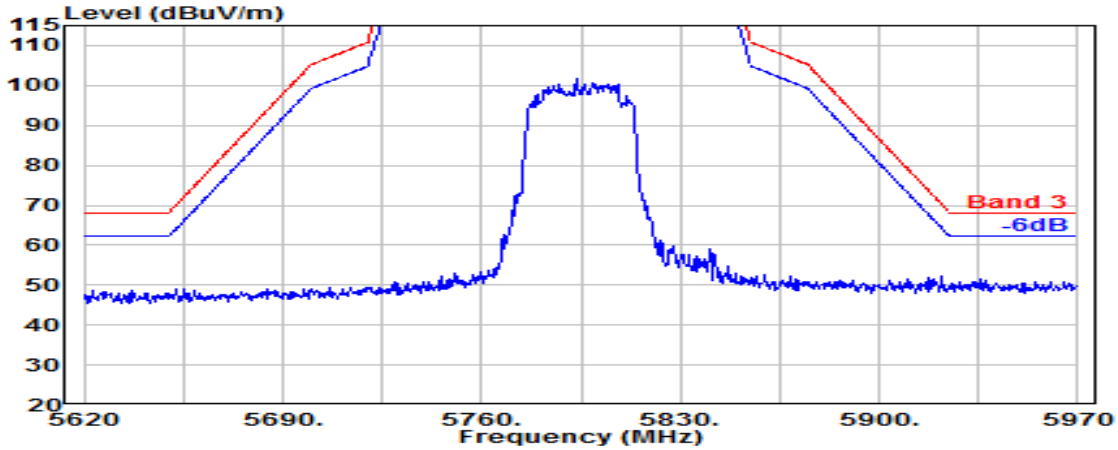


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

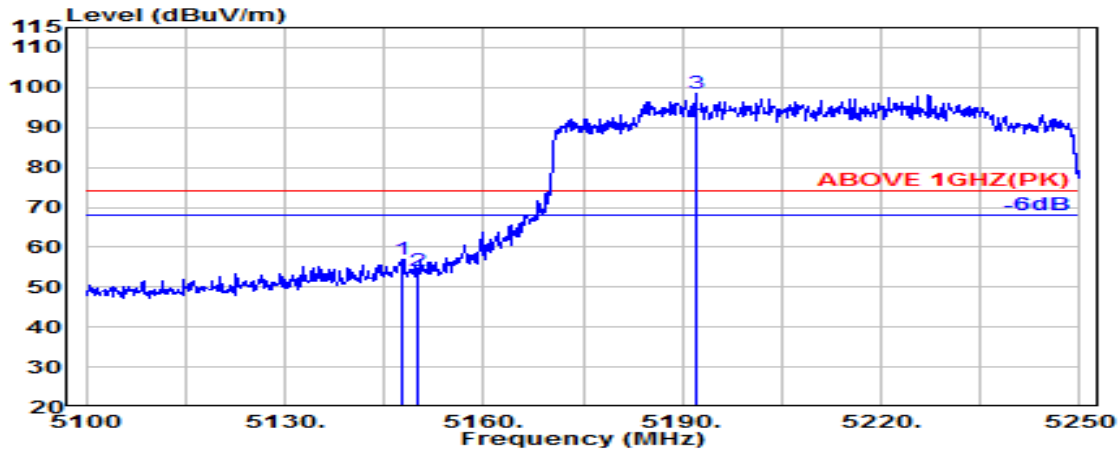

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.850	34.49	8.88	34.34	47.89	56.92	74.00	17.08	Peak
5150.000	34.50	8.89	34.34	45.12	54.17	74.00	19.83	Peak
@ 5191.950	34.67	8.91	34.32	89.18	98.44	---	---	Peak

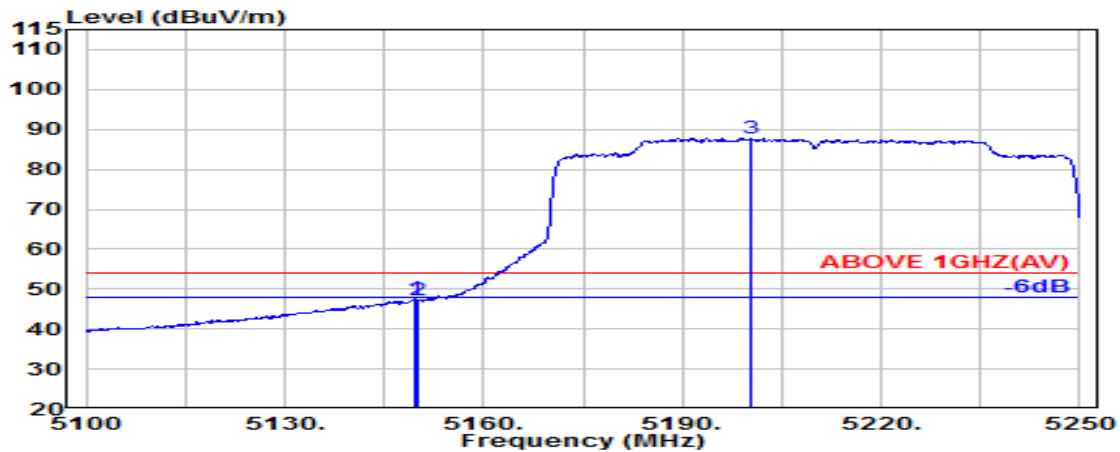


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.89	34.34	38.46	47.51	54.00	6.49	Average
5150.000	34.50	8.89	34.34	38.08	47.13	54.00	6.87	Average
@ 5200.350	34.70	8.91	34.32	78.46	87.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

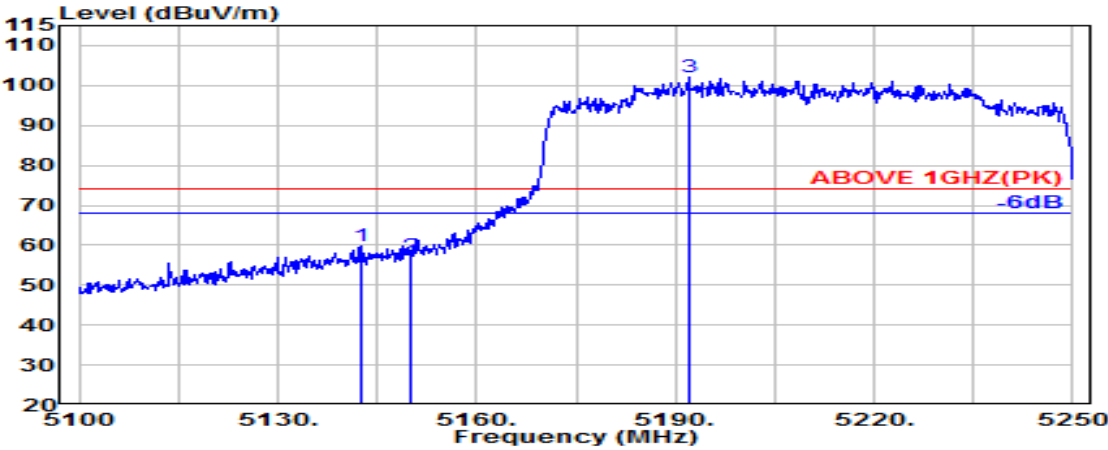

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.750	34.46	8.88	34.34	50.84	59.83	74.00	14.17	Peak
5150.000	34.50	8.89	34.34	48.15	57.20	74.00	16.80	Peak
@ 5191.950	34.67	8.91	34.32	92.90	102.16	---	---	Peak

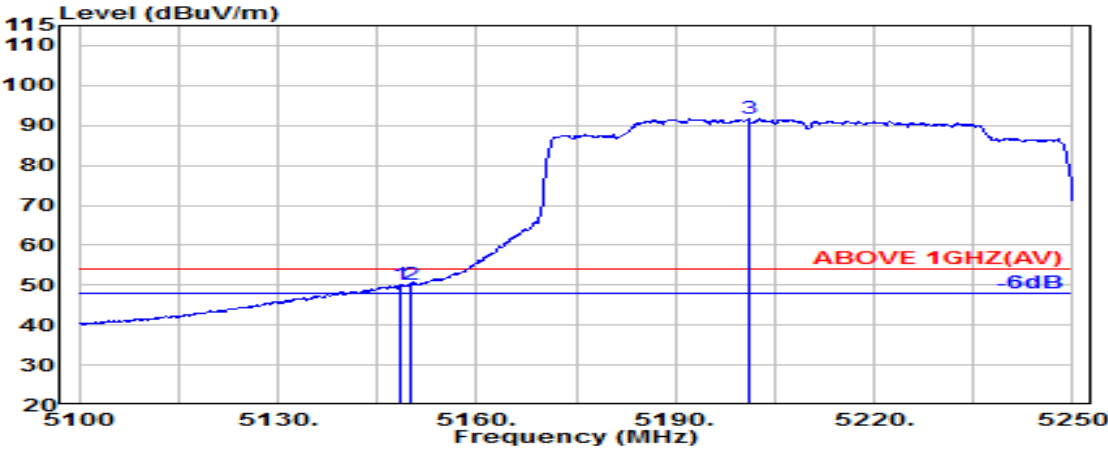


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.450	34.49	8.89	34.34	41.19	50.23	54.00	3.77	Average
5150.000	34.50	8.89	34.34	41.22	50.27	54.00	3.73	Average
@ 5201.100	34.70	8.91	34.32	82.46	91.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

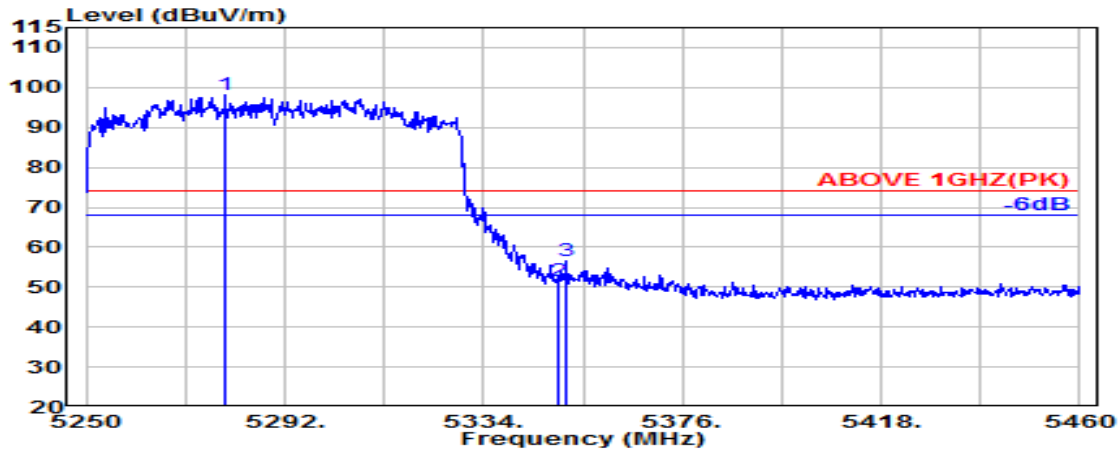

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.400	34.44	8.96	34.29	88.94	98.05	---	---	Peak
5350.000	34.90	9.00	34.26	41.84	51.48	74.00	22.52	Peak
5351.430	34.90	9.00	34.26	47.06	56.69	74.00	17.31	Peak

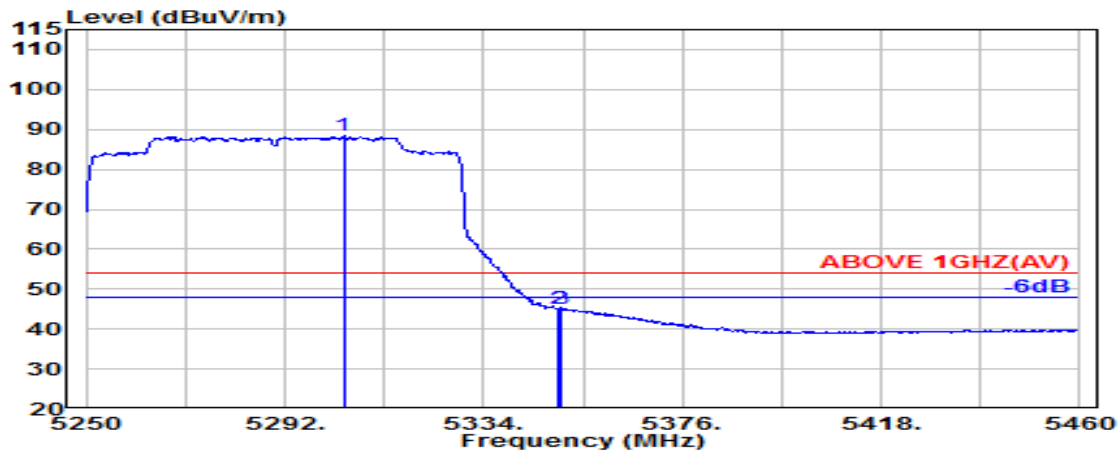


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.390	34.44	8.97	34.28	79.32	88.46	---	---	Average
5350.000	34.90	9.00	34.26	35.55	45.19	54.00	8.81	Average
5350.590	34.90	9.00	34.26	35.44	45.08	54.00	8.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

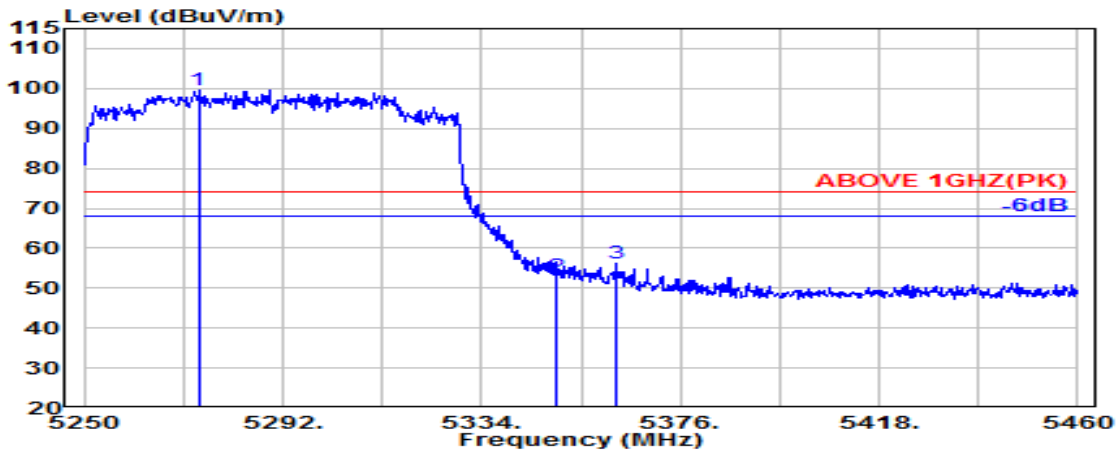

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5274.150	34.45	8.96	34.29	90.50	99.62	---	---	Peak
5350.000	34.90	9.00	34.26	43.52	53.16	74.00	20.84	Peak
5362.350	34.88	9.00	34.25	46.45	56.07	74.00	17.93	Peak

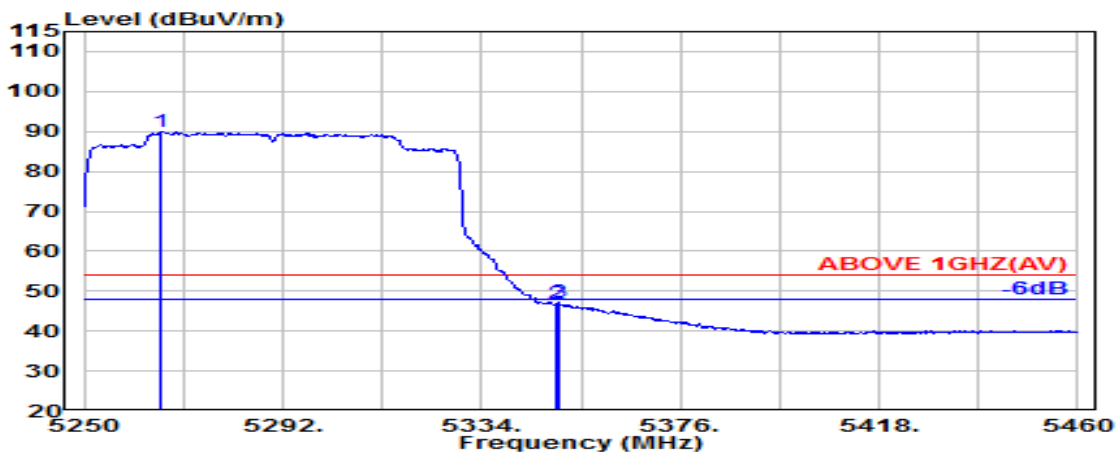


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.170	34.47	8.95	34.29	80.70	89.83	---	---	Average
5350.000	34.90	9.00	34.26	37.15	46.79	54.00	7.21	Average
5350.380	34.90	9.00	34.26	37.45	47.09	54.00	6.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

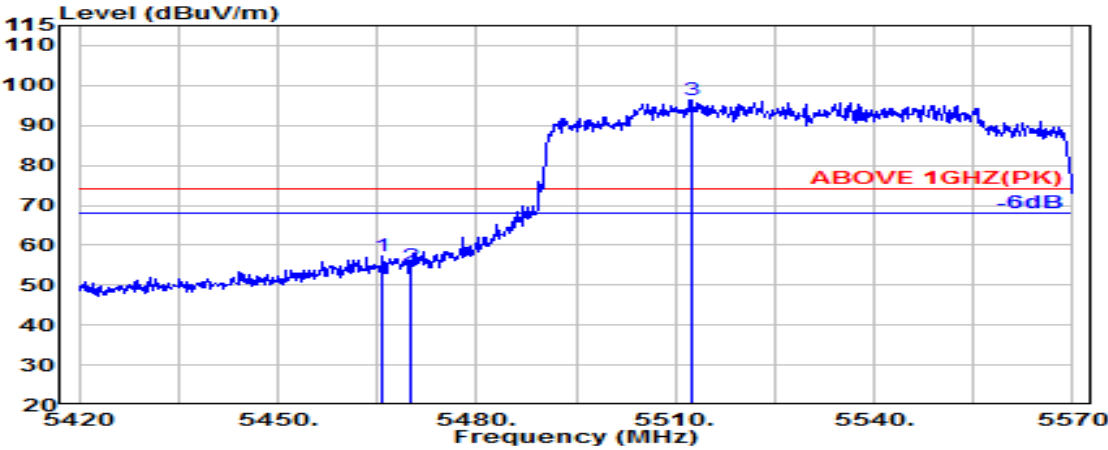

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.63	9.06	34.21	47.63	57.11	74.00	16.89	Peak
5470.000	34.64	9.06	34.21	45.45	54.94	74.00	19.06	Peak
@ 5512.400	34.70	9.08	34.21	86.86	96.44	---	---	Peak

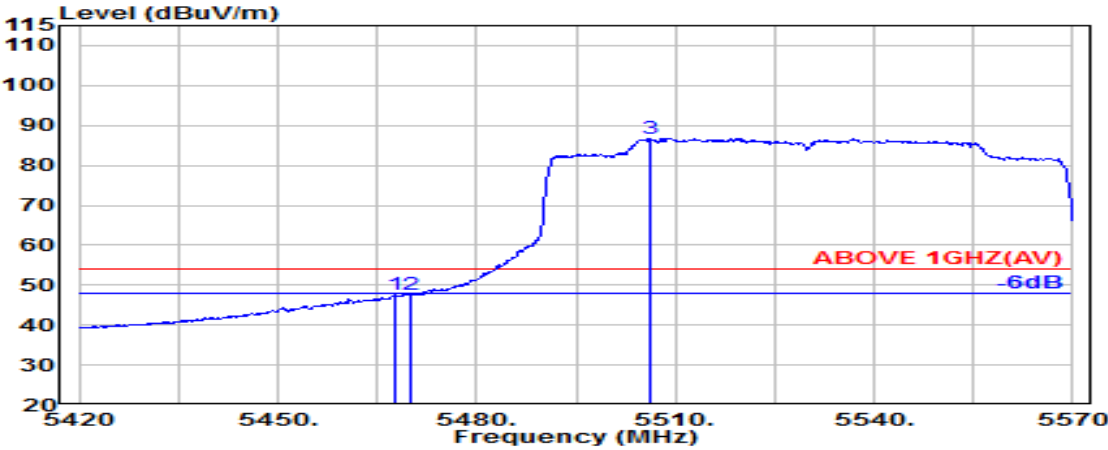


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.64	9.06	34.21	38.08	47.56	54.00	6.44	Average
5470.000	34.64	9.06	34.21	38.15	47.64	54.00	6.36	Average
@ 5506.100	34.70	9.08	34.20	77.23	86.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

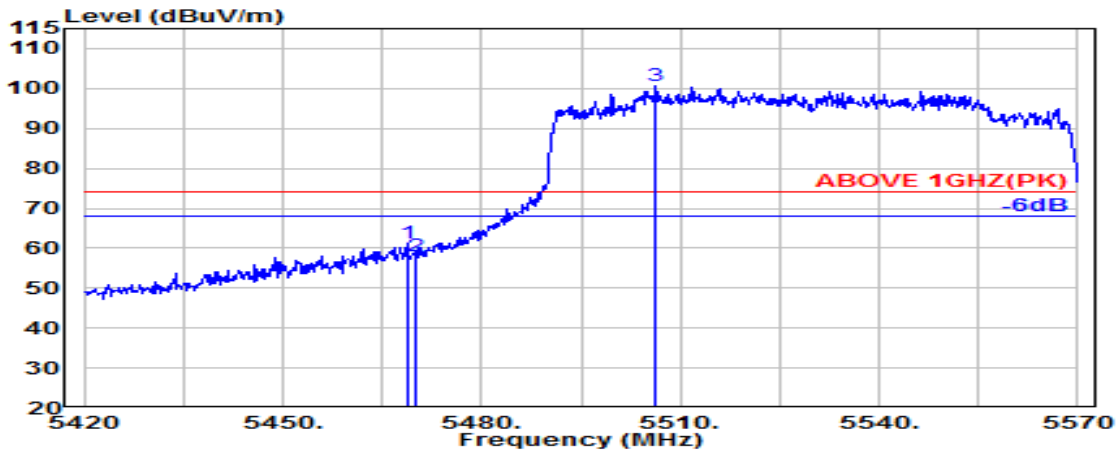

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.64	9.06	34.21	51.68	61.17	74.00	12.83	Peak
5470.000	34.64	9.06	34.21	48.58	58.07	74.00	15.93	Peak
@ 5506.250	34.70	9.08	34.20	90.92	100.50	---	---	Peak

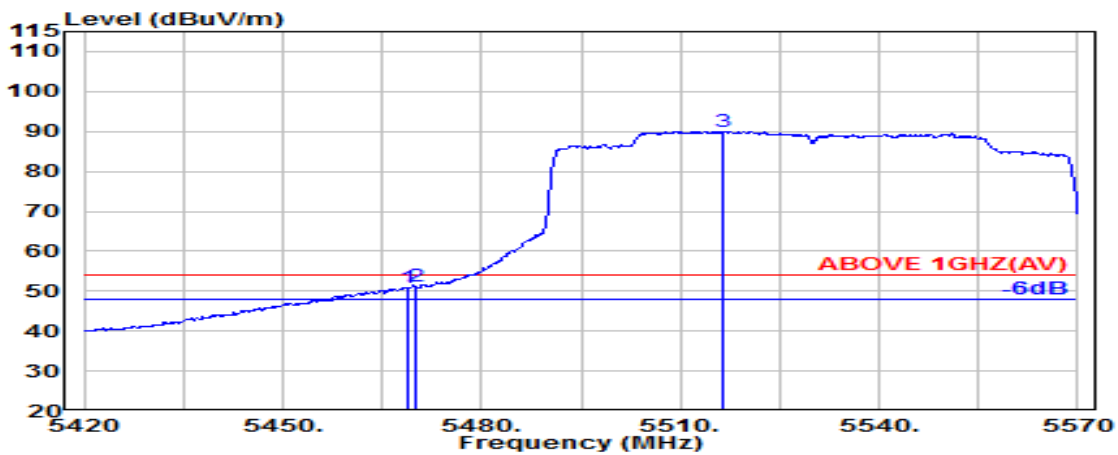


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.64	9.06	34.21	41.45	50.94	54.00	3.06	Average
5470.000	34.64	9.06	34.21	41.83	51.32	54.00	2.68	Average
@ 5516.300	34.70	9.09	34.21	80.49	90.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

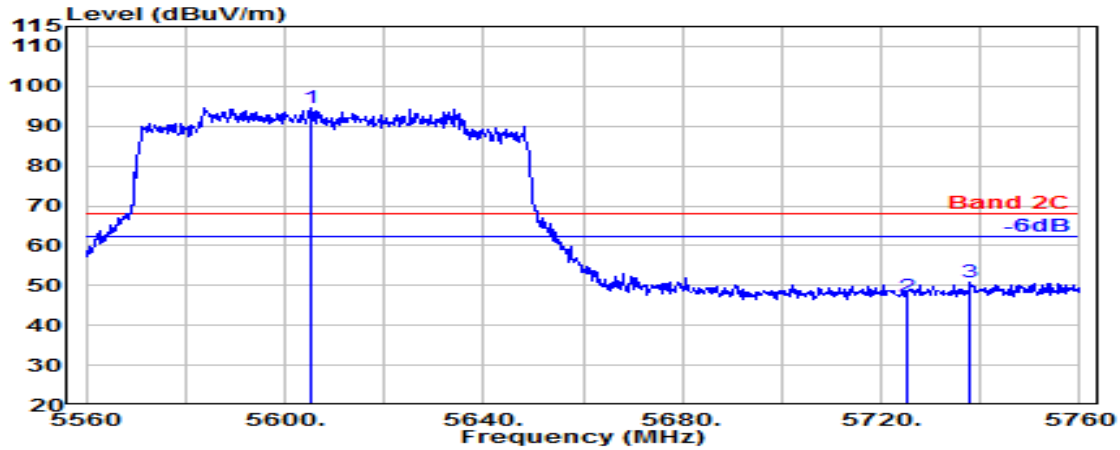

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.200	34.41	9.13	34.25	85.41	94.70	---	---	Peak
5725.000	34.85	9.19	34.31	37.48	47.22	68.20	20.98	Peak
5738.000	34.93	9.20	34.31	40.84	50.66	68.20	17.54	Peak

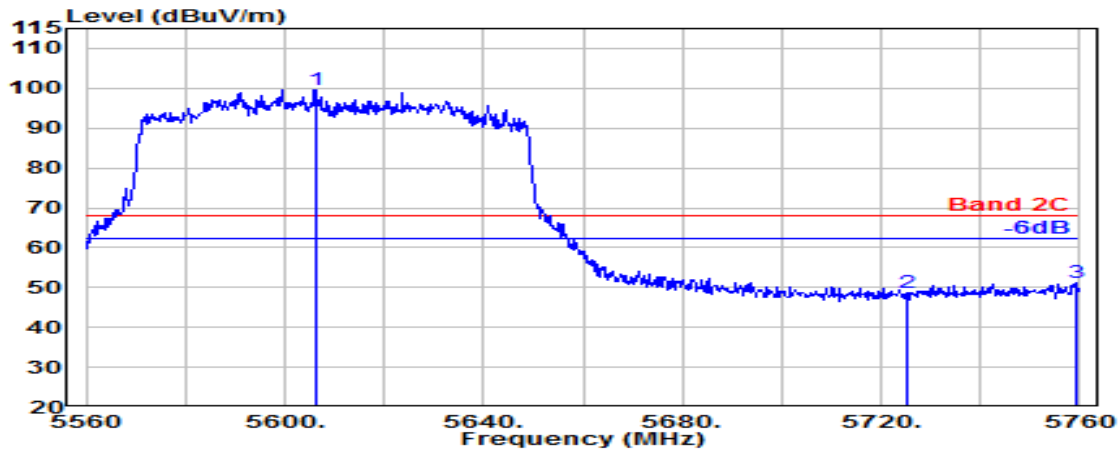


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.200	34.41	9.13	34.25	90.24	99.53	---	---	Peak
5725.000	34.85	9.19	34.31	39.04	48.78	68.20	19.42	Peak
5759.200	35.02	9.21	34.32	41.27	51.18	68.20	17.02	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

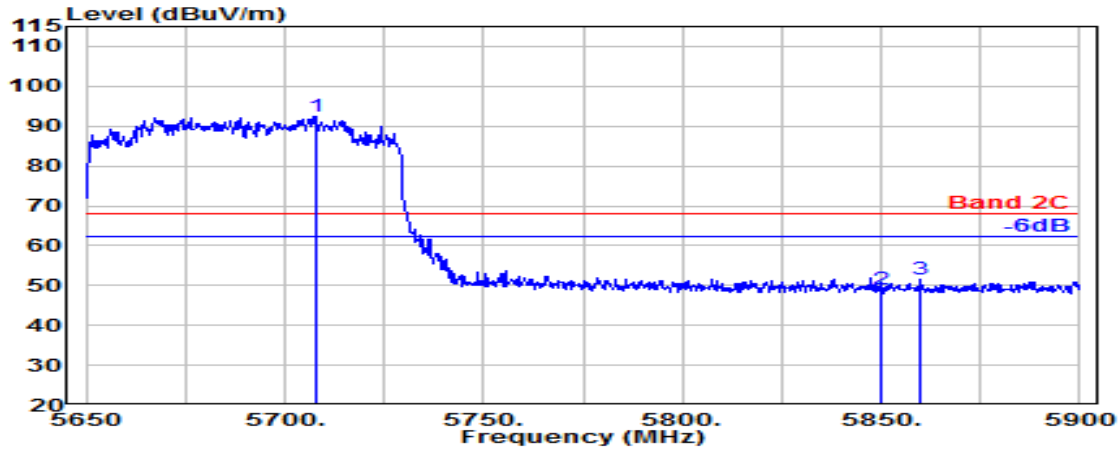

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.750	34.75	9.18	34.30	82.65	92.28	---	---	Peak
5850.000	35.40	9.26	34.36	38.81	49.10	68.20	19.10	Peak
5859.750	35.48	9.26	34.37	41.27	51.65	68.20	16.55	Peak

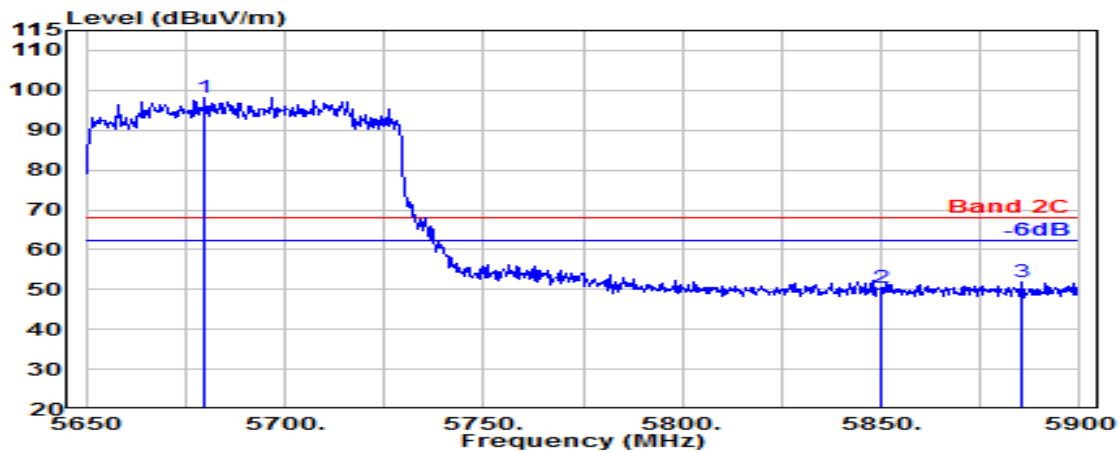


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.000	34.62	9.17	34.29	88.70	98.20	---	---	Peak
5850.000	35.40	9.26	34.36	40.20	50.50	68.20	17.70	Peak
5885.500	35.68	9.27	34.38	41.32	51.90	68.20	16.30	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

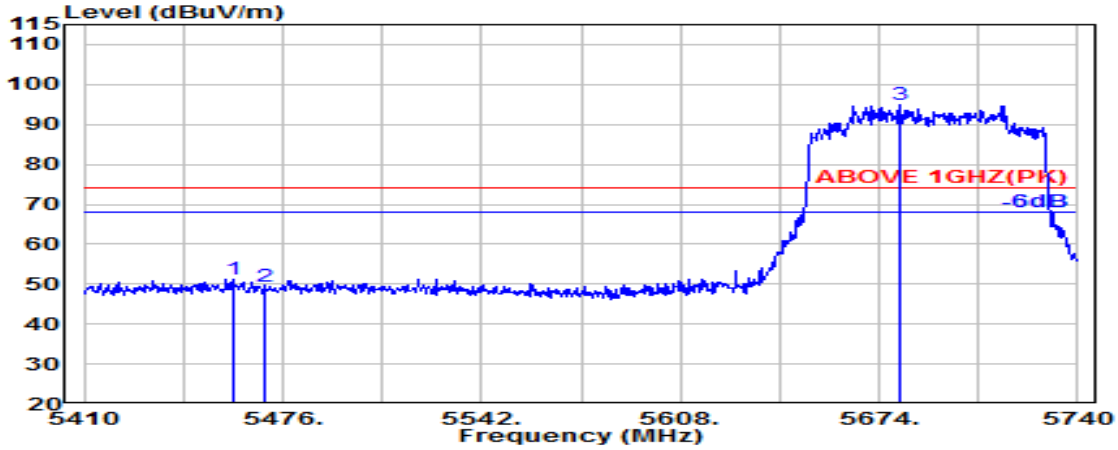

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.500	34.62	9.06	34.22	41.67	51.13	74.00	22.87	Peak
5470.000	34.64	9.06	34.21	39.97	49.46	74.00	24.54	Peak
@ 5680.600	34.62	9.17	34.29	85.39	94.89	---	---	Peak

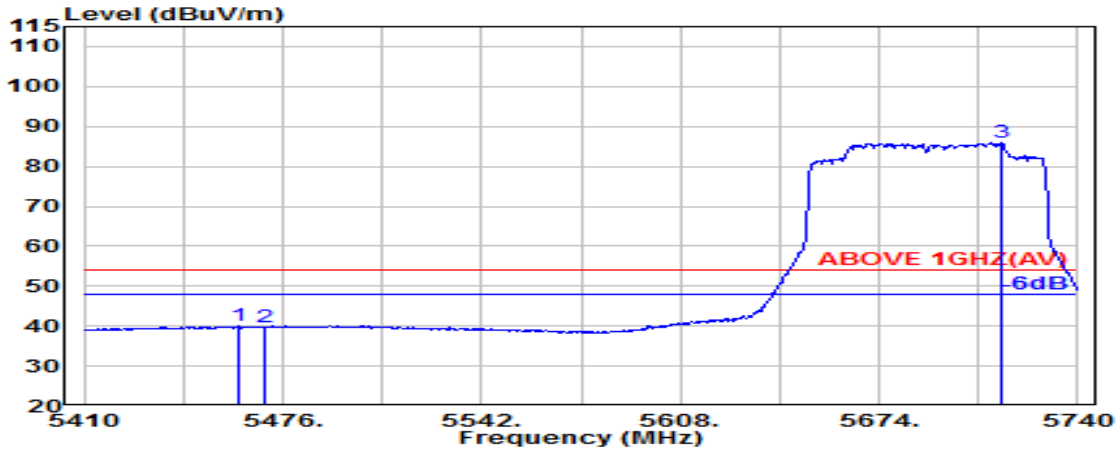


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.150	34.62	9.06	34.21	30.45	39.91	74.00	34.09	Peak
5470.000	34.64	9.06	34.21	30.26	39.75	74.00	34.25	Peak
@ 5714.590	34.79	9.19	34.30	76.21	85.88	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

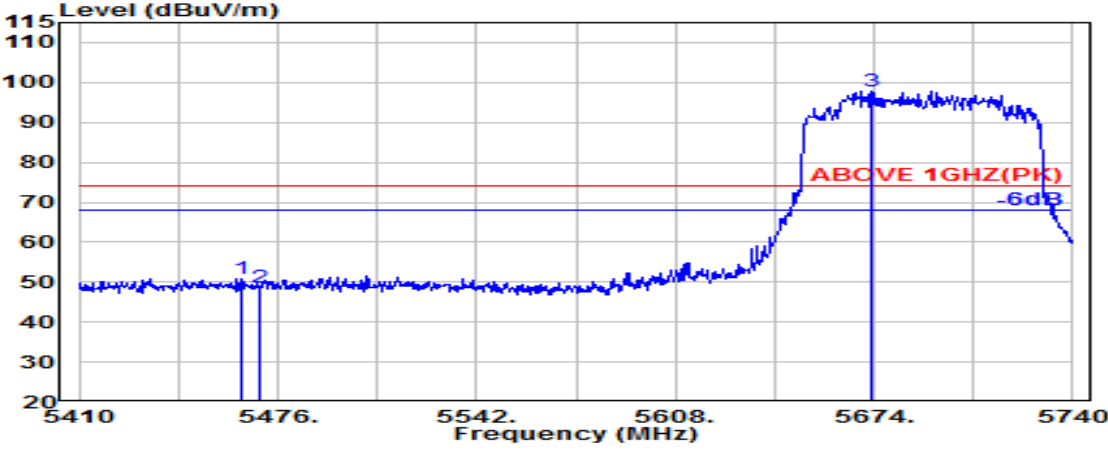

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.120	34.63	9.06	34.21	41.39	50.86	74.00	23.14	Peak
5470.000	34.64	9.06	34.21	39.26	48.75	74.00	25.25	Peak
@ 5673.010	34.59	9.17	34.28	88.40	97.88	---	---	Peak

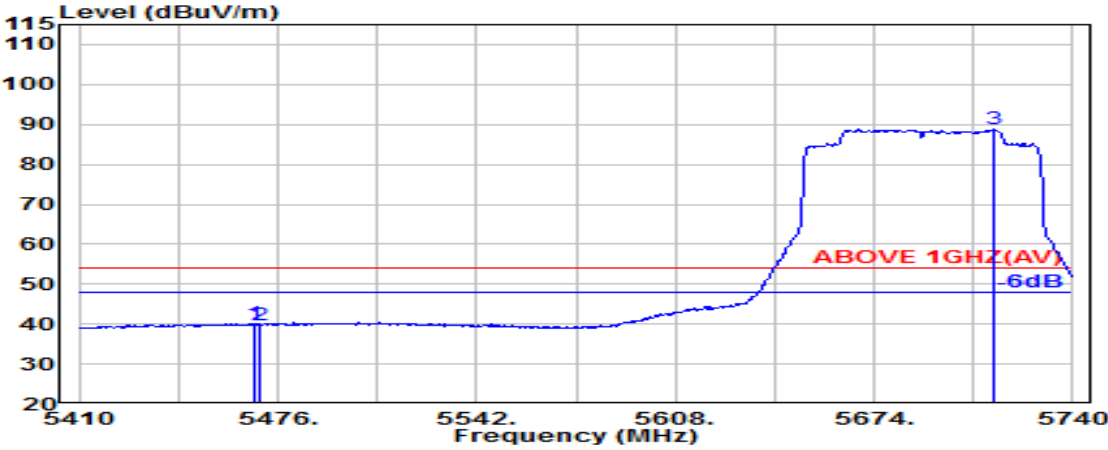


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.410	34.64	9.06	34.21	30.64	40.12	54.00	13.88	Average
5470.000	34.64	9.06	34.21	30.38	39.87	54.00	14.13	Average
@ 5713.600	34.78	9.19	34.30	79.11	88.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

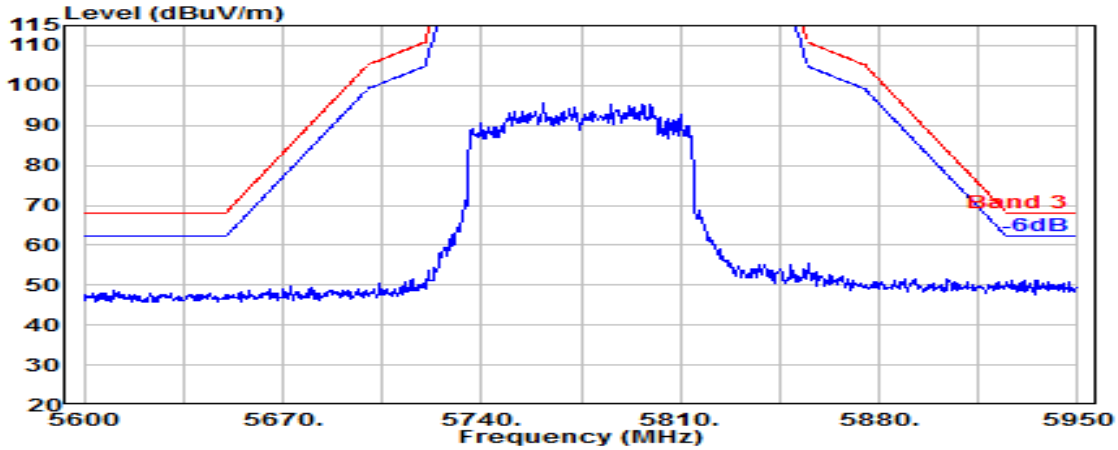

Antenna at Vertical Polarization

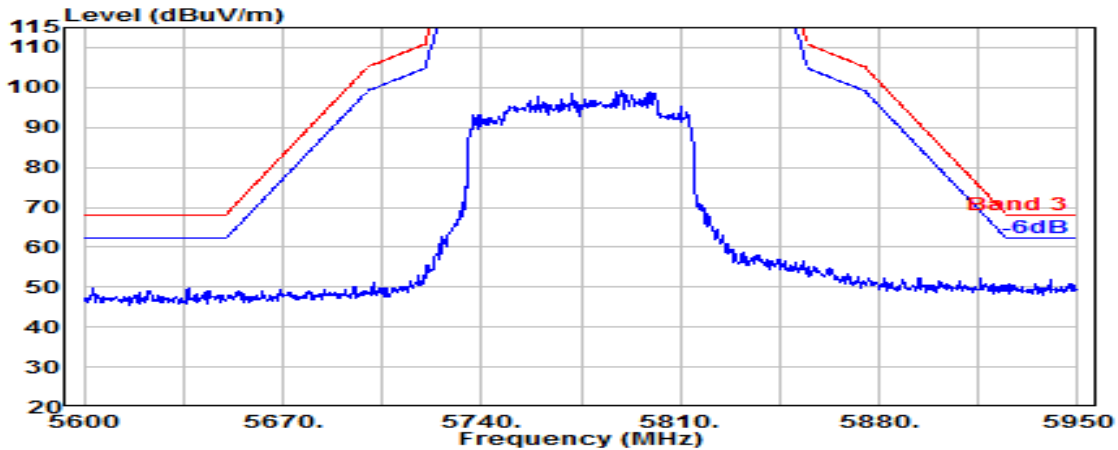


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

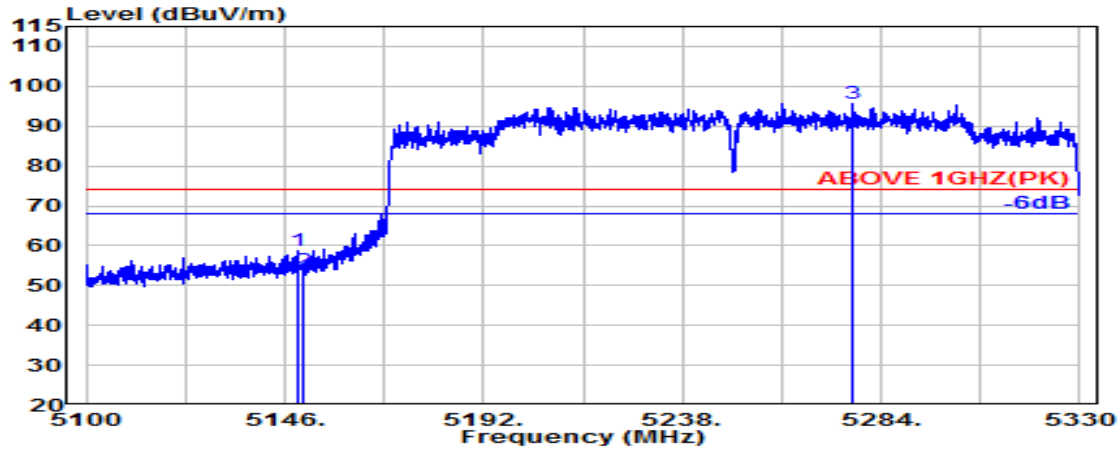

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.49	8.89	34.34	49.67	58.71	74.00	15.29	Peak
5150.000	34.50	8.89	34.34	44.69	53.74	74.00	20.26	Peak
@ 5277.600	34.44	8.96	34.29	86.62	95.74	---	---	Peak

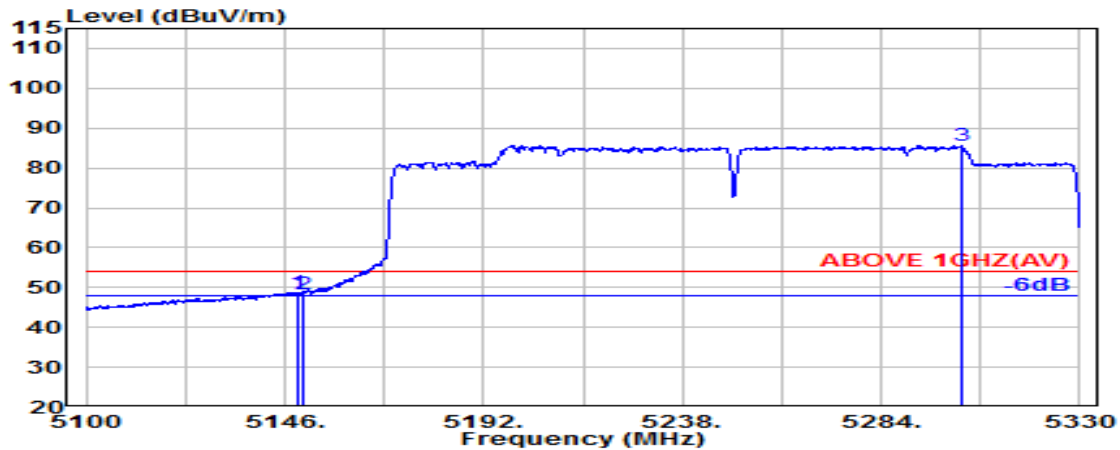


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.50	8.89	34.34	39.63	48.67	54.00	5.33	Average
5150.000	34.50	8.89	34.34	39.32	48.37	54.00	5.63	Average
@ 5302.700	34.43	8.97	34.28	76.46	85.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

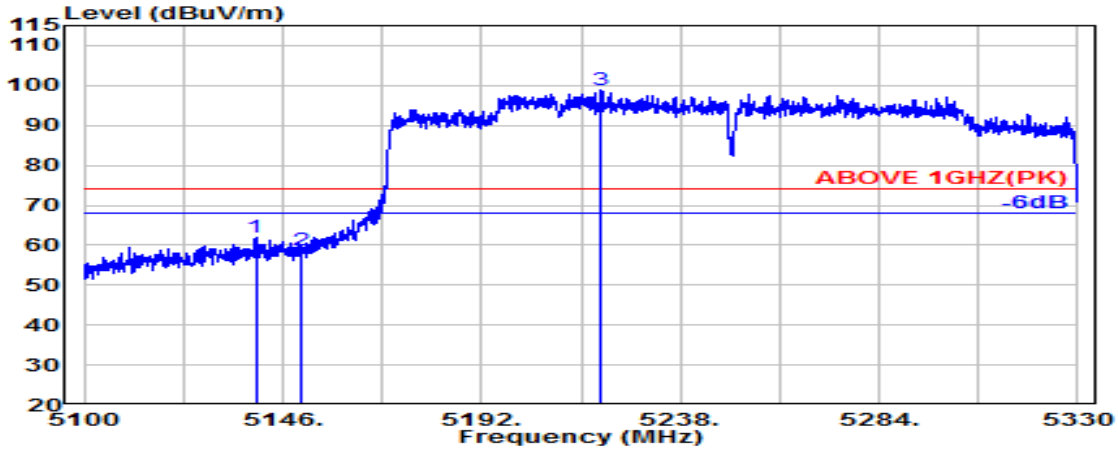

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.700	34.44	8.88	34.34	52.83	61.81	74.00	12.19	Peak
5150.000	34.50	8.89	34.34	49.82	58.87	74.00	15.13	Peak
@ 5219.800	34.62	8.93	34.31	89.69	98.92	---	---	Peak

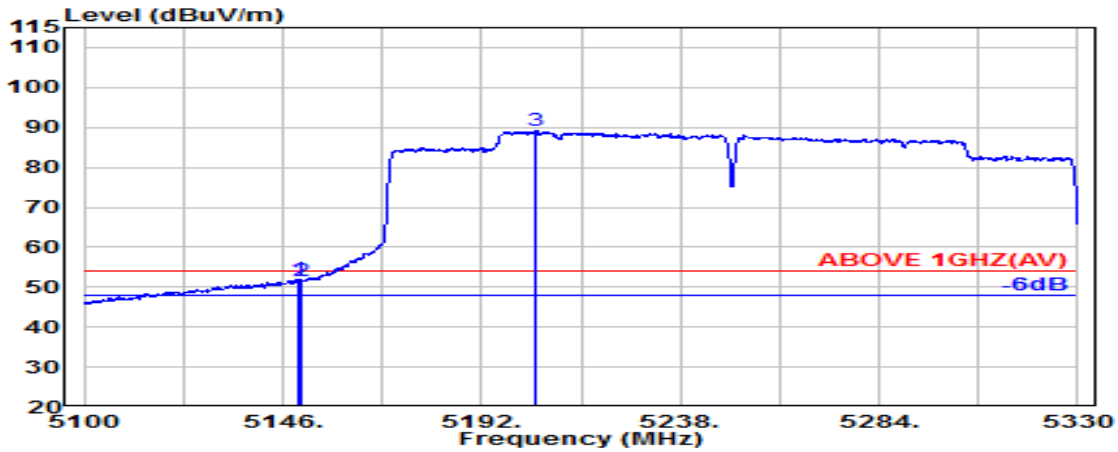


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.89	34.34	42.86	51.90	54.00	2.10	Average
5150.000	34.50	8.89	34.34	42.48	51.52	54.00	2.48	Average
@ 5204.700	34.68	8.92	34.32	80.05	89.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

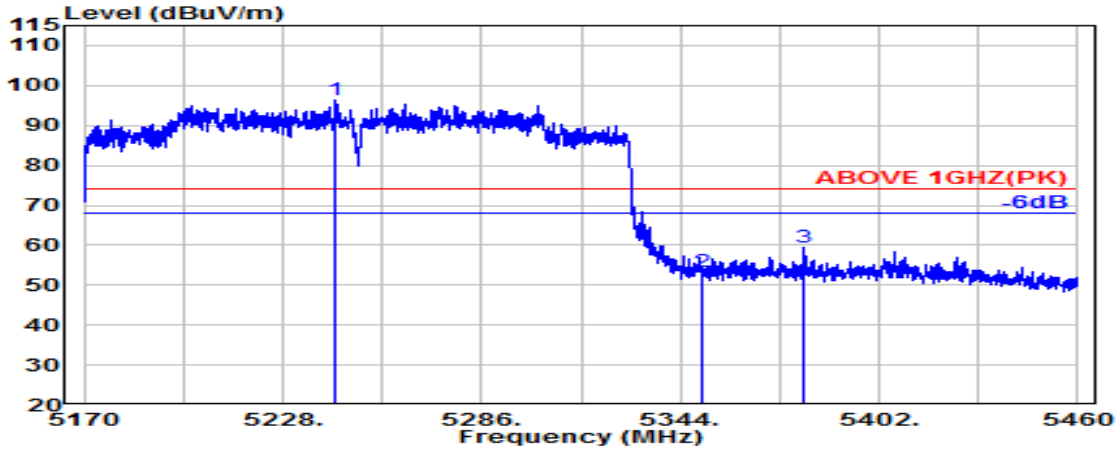

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5243.500	34.53	8.94	34.30	87.11	96.27	---	---	Peak
5350.000	34.90	9.00	34.26	43.66	53.30	74.00	20.70	Peak
5380.200	34.84	9.01	34.25	49.82	59.43	74.00	14.57	Peak

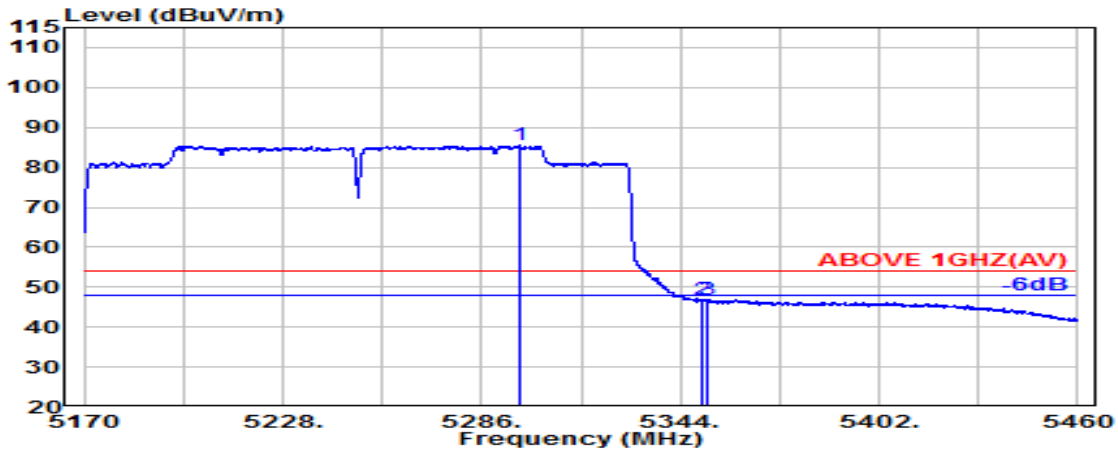


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.200	34.41	8.97	34.28	76.55	85.64	---	---	Average
5350.000	34.90	9.00	34.26	37.11	46.75	54.00	7.25	Average
5351.600	34.90	9.00	34.26	37.22	46.86	54.00	7.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

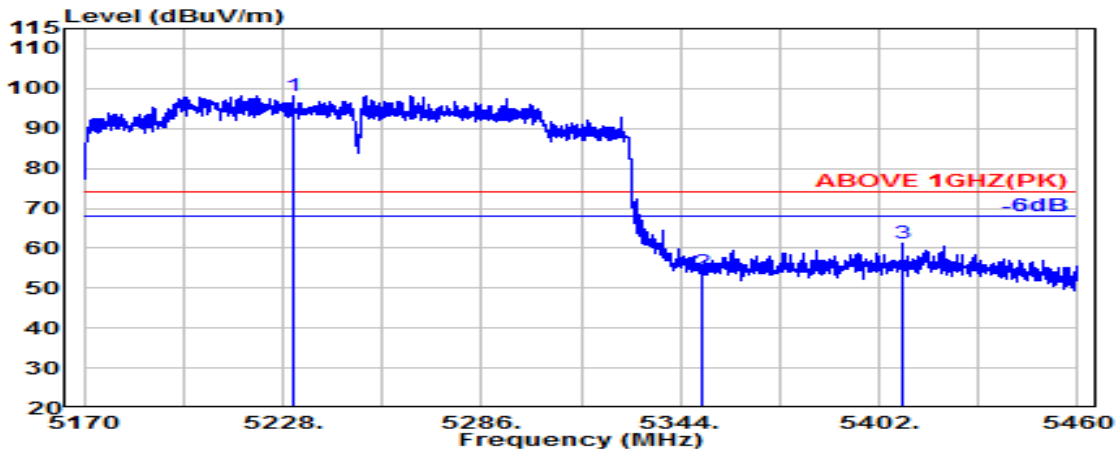

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5230.800	34.58	8.93	34.31	89.05	98.26	---	---	Peak
5350.000	34.90	9.00	34.26	44.36	54.00	74.00	20.00	Peak
5409.000	34.76	9.03	34.24	51.63	61.19	74.00	12.81	Peak

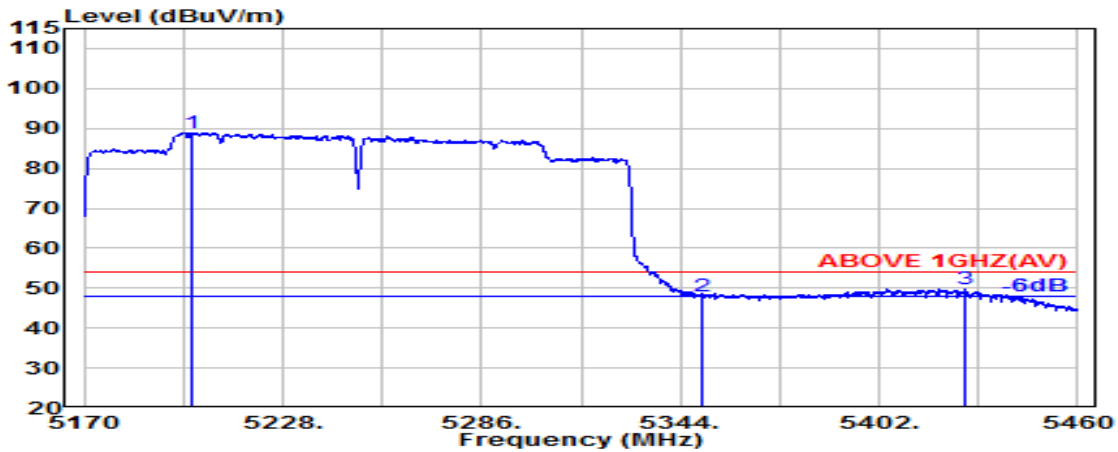


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5201.100	34.70	8.91	34.32	79.72	89.01	---	---	Average
5350.000	34.90	9.00	34.26	38.27	47.91	54.00	6.09	Average
5426.900	34.69	9.04	34.23	40.20	49.70	54.00	4.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

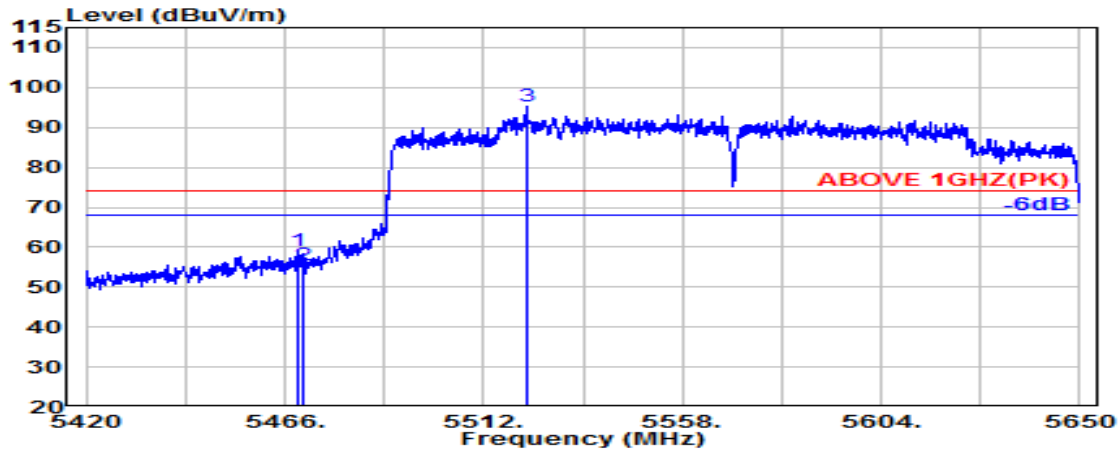

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.269	34.64	9.06	34.21	49.55	59.04	74.00	14.96	Peak
5470.000	34.64	9.06	34.21	46.07	55.56	74.00	18.44	Peak
@ 5521.926	34.70	9.09	34.21	85.76	95.34	---	---	Peak

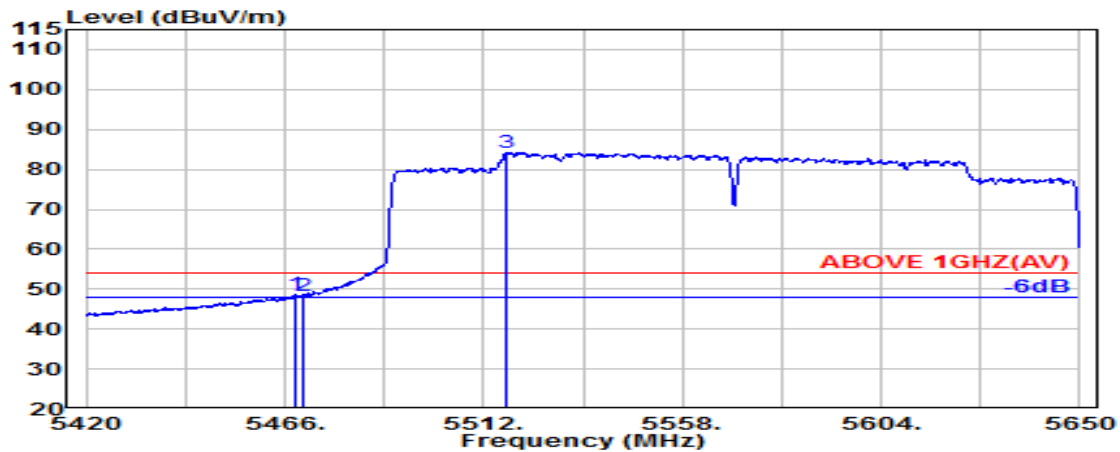


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.421	34.64	9.06	34.21	39.03	48.51	54.00	5.49	Average
5470.000	34.64	9.06	34.21	38.70	48.19	54.00	5.81	Average
@ 5517.326	34.70	9.09	34.21	74.70	84.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

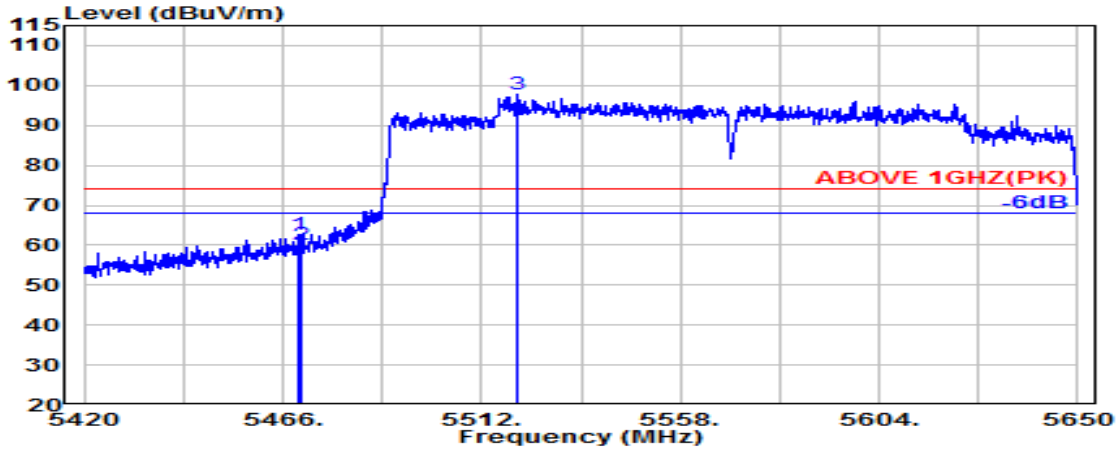

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.874	34.64	9.06	34.21	53.34	62.83	74.00	11.17	Peak
5470.000	34.64	9.06	34.21	50.62	60.11	74.00	13.89	Peak
@ 5520.474	34.70	9.09	34.21	88.38	97.96	---	---	Peak

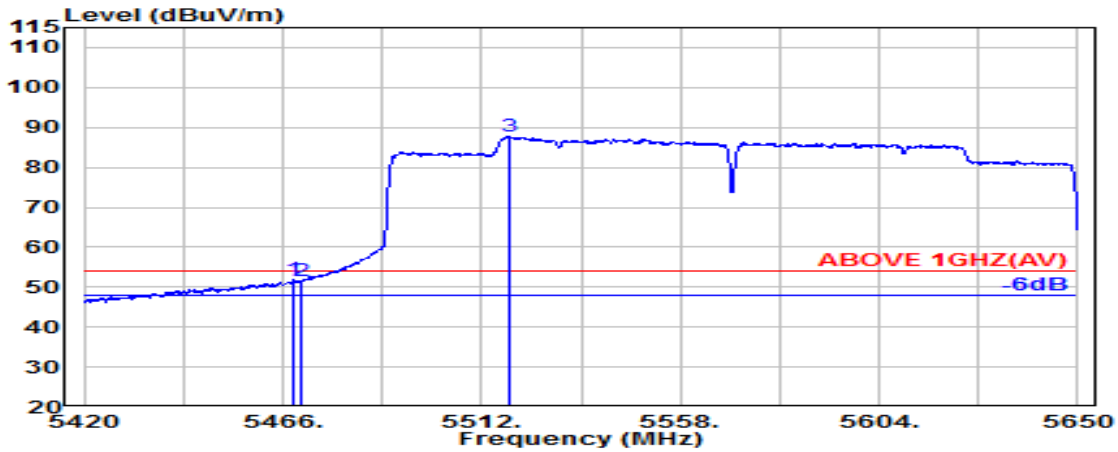


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.542	34.64	9.06	34.21	42.29	51.78	54.00	2.22	Average
5470.000	34.64	9.06	34.21	42.12	51.61	54.00	2.39	Average
@ 5518.416	34.70	9.09	34.21	78.08	87.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

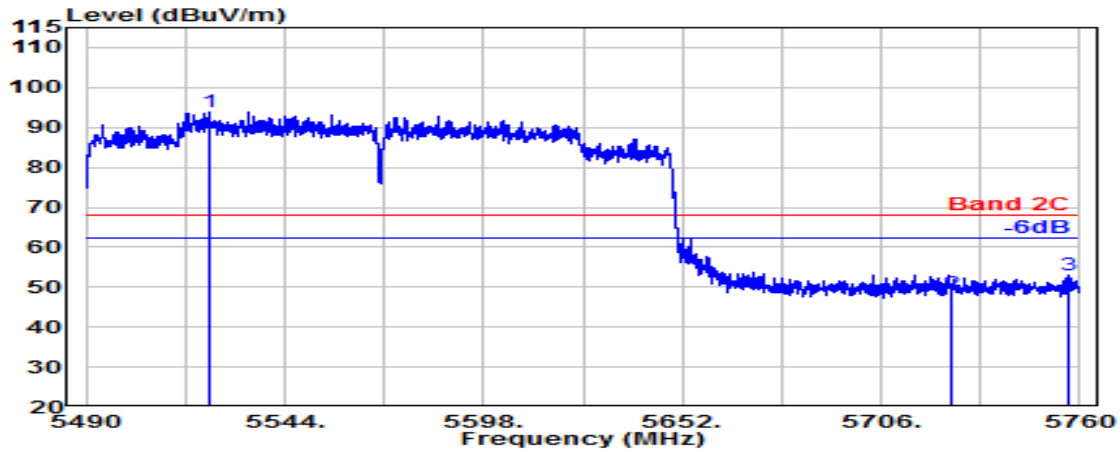

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5523.700	34.70	9.09	34.21	84.21	93.79	---	---	Peak
5725.000	34.85	9.19	34.31	38.67	48.41	68.20	19.79	Peak
5756.800	35.01	9.21	34.32	42.95	52.85	68.20	15.35	Peak

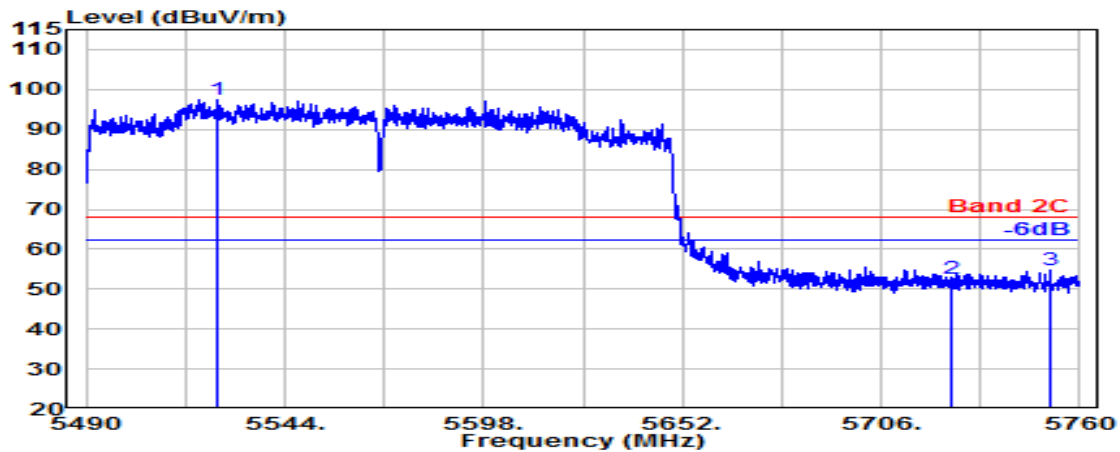


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5525.800	34.70	9.09	34.21	87.90	97.48	---	---	Peak
5725.000	34.85	9.19	34.31	42.86	52.60	68.20	15.60	Peak
5752.100	35.00	9.21	34.32	44.92	54.81	68.20	13.39	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

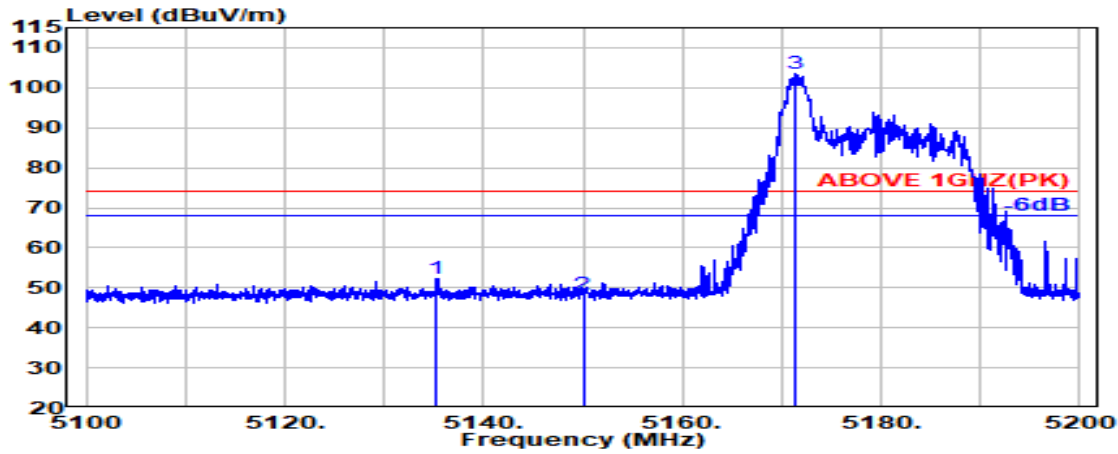

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.296	34.41	8.88	34.34	43.16	52.11	74.00	21.89	Peak
5150.000	34.50	8.89	34.34	39.42	48.46	74.00	25.54	Peak
@ 5171.296	34.59	8.90	34.33	94.34	103.49	---	---	Peak

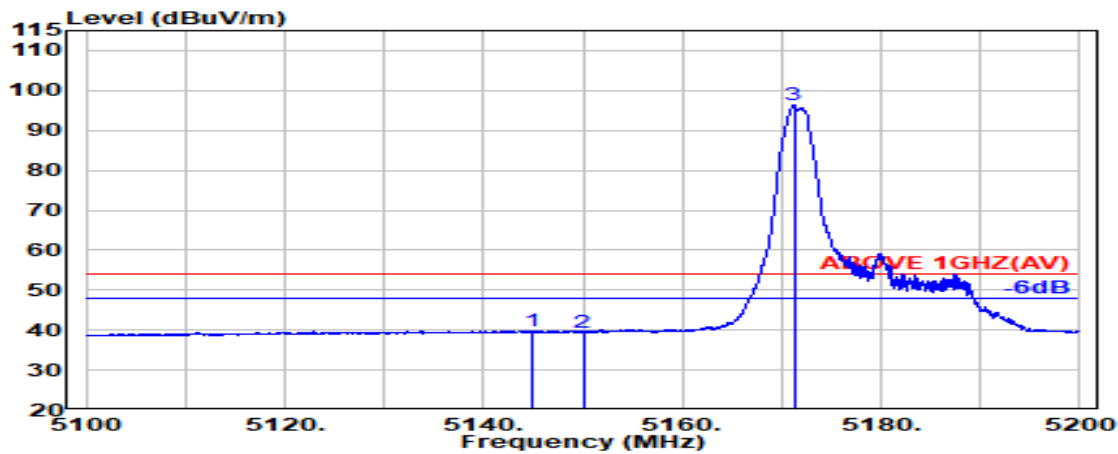


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.889	34.47	8.88	34.34	30.84	39.85	54.00	14.15	Average
5150.000	34.50	8.89	34.34	30.43	39.48	54.00	14.52	Average
@ 5171.222	34.59	8.90	34.33	87.07	96.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

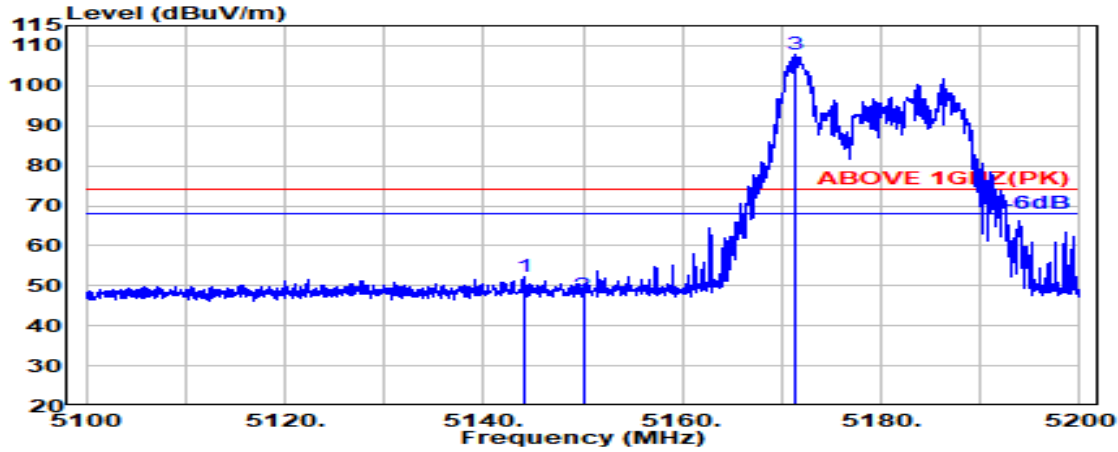

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.185	34.47	8.88	34.34	43.37	52.38	74.00	21.62	Peak
5150.000	34.50	8.89	34.34	38.63	47.68	74.00	26.32	Peak
@ 5171.259	34.59	8.90	34.33	98.58	107.73	---	---	Peak

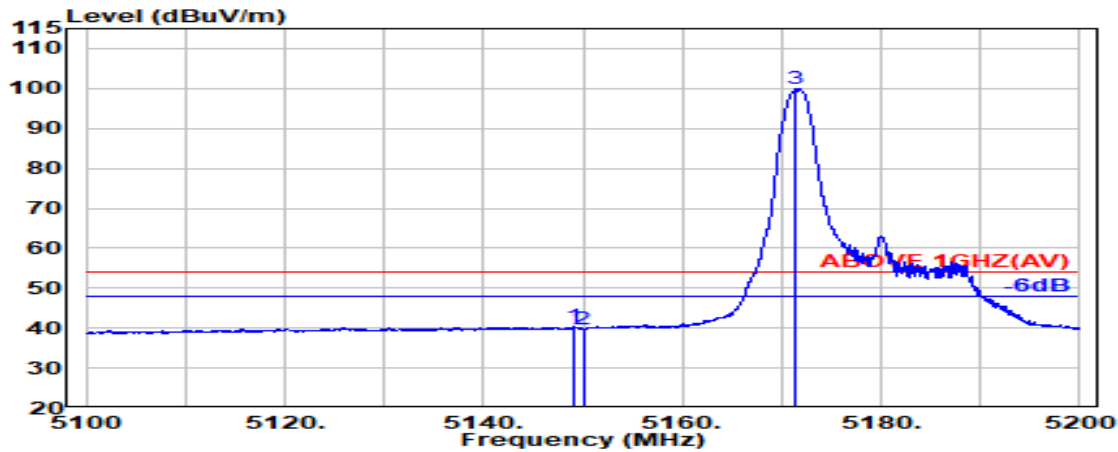


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	34.49	8.89	34.34	31.23	40.27	54.00	13.73	Average
5150.000	34.50	8.89	34.34	30.85	39.89	54.00	14.11	Average
@ 5171.333	34.59	8.90	34.33	90.79	99.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

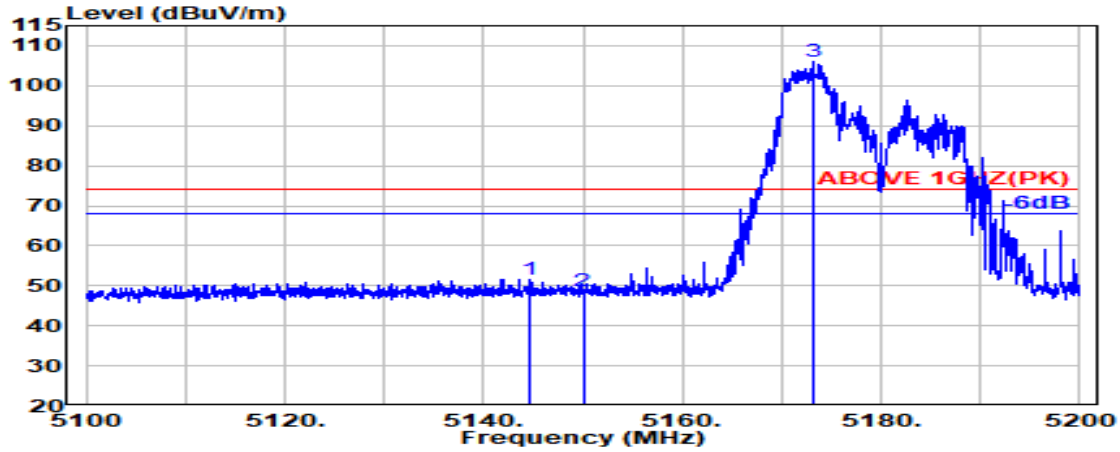

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.741	34.47	8.88	34.34	42.51	51.52	74.00	22.48	Peak
5150.000	34.50	8.89	34.34	39.49	48.54	74.00	25.46	Peak
@ 5173.074	34.59	8.90	34.33	96.85	106.02	---	---	Peak

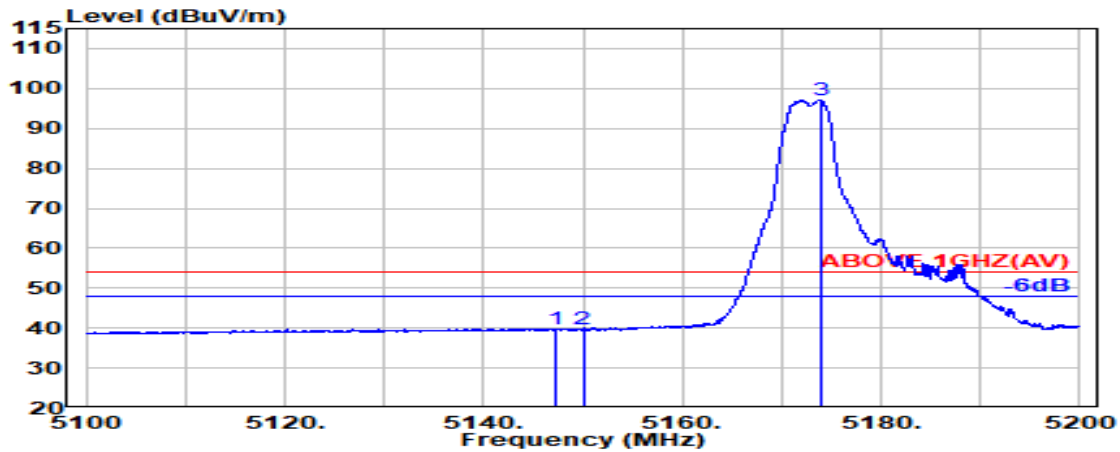


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.222	34.48	8.88	34.34	30.86	39.89	54.00	14.11	Average
5150.000	34.50	8.89	34.34	30.84	39.89	54.00	14.11	Average
@ 5173.852	34.60	8.90	34.33	87.97	97.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

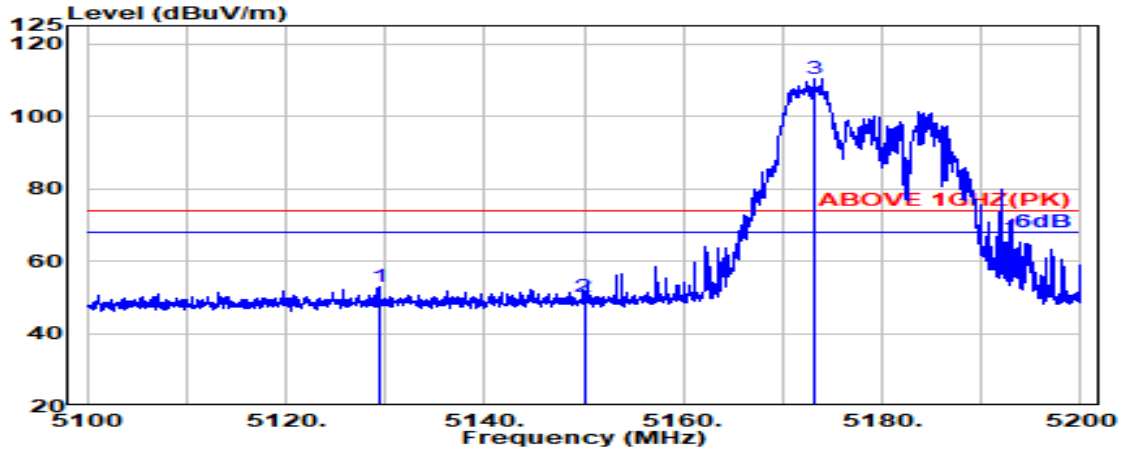

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.333	34.38	8.87	34.35	44.06	52.96	74.00	21.04	Peak
5150.000	34.50	8.89	34.34	41.01	50.06	74.00	23.94	Peak
@ 5173.185	34.59	8.90	34.33	101.26	110.42	---	---	Peak

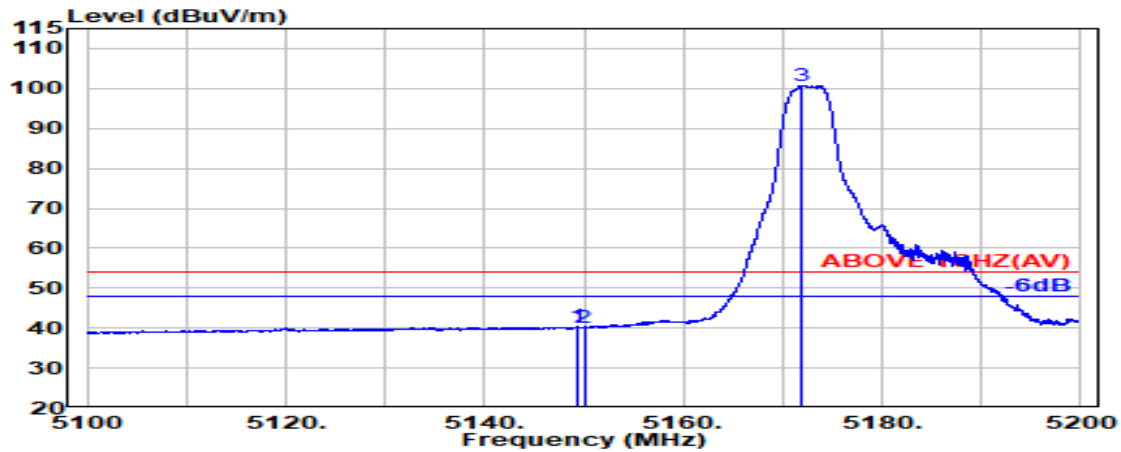


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.259	34.50	8.89	34.34	31.26	40.30	54.00	13.70	Average
5150.000	34.50	8.89	34.34	31.10	40.15	54.00	13.85	Average
@ 5171.815	34.59	8.90	34.33	91.65	100.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

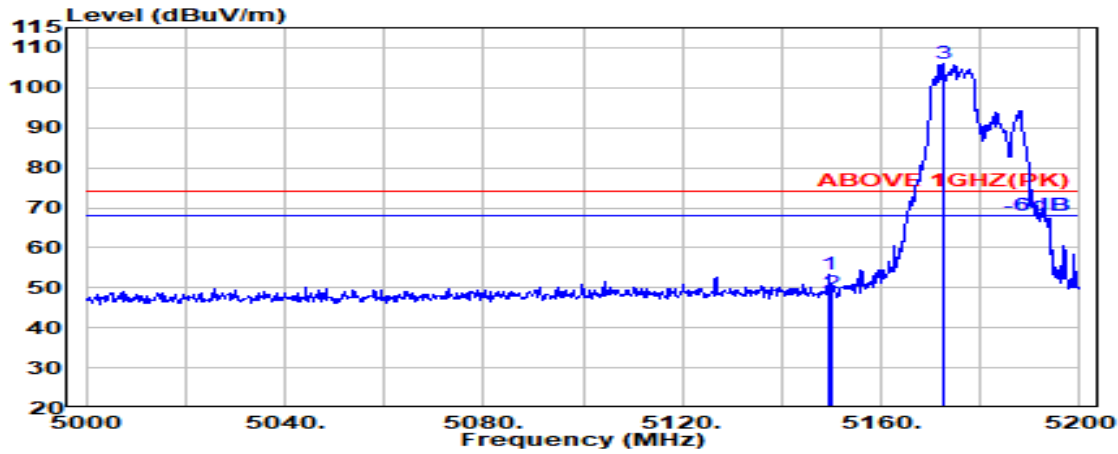

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.50	8.89	34.34	44.21	53.25	74.00	20.75	Peak
5150.000	34.50	8.89	34.34	39.70	48.75	74.00	25.25	Peak
@ 5172.600	34.59	8.90	34.33	96.72	105.88	---	---	Peak

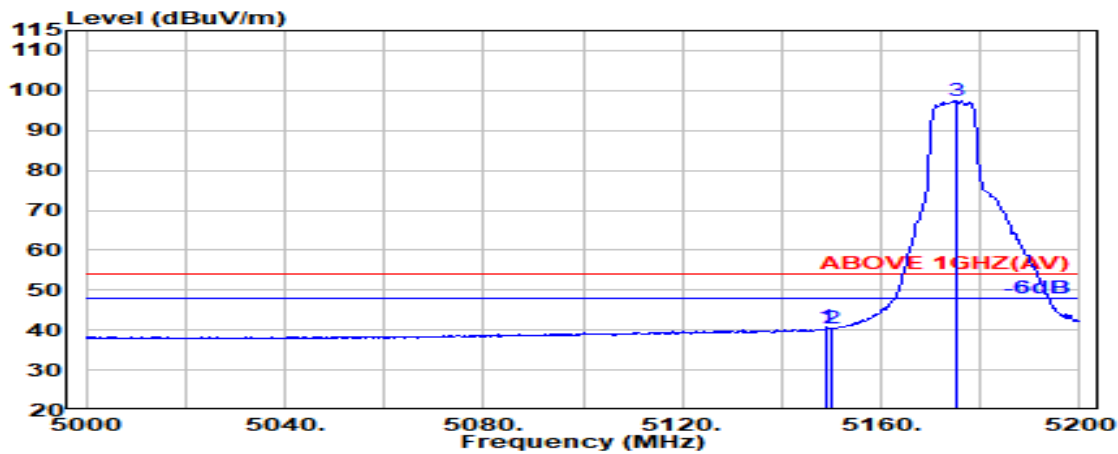


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.50	8.89	34.34	31.70	40.74	54.00	13.26	Average
5150.000	34.50	8.89	34.34	31.26	40.31	54.00	13.69	Average
@ 5175.000	34.60	8.90	34.33	88.15	97.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

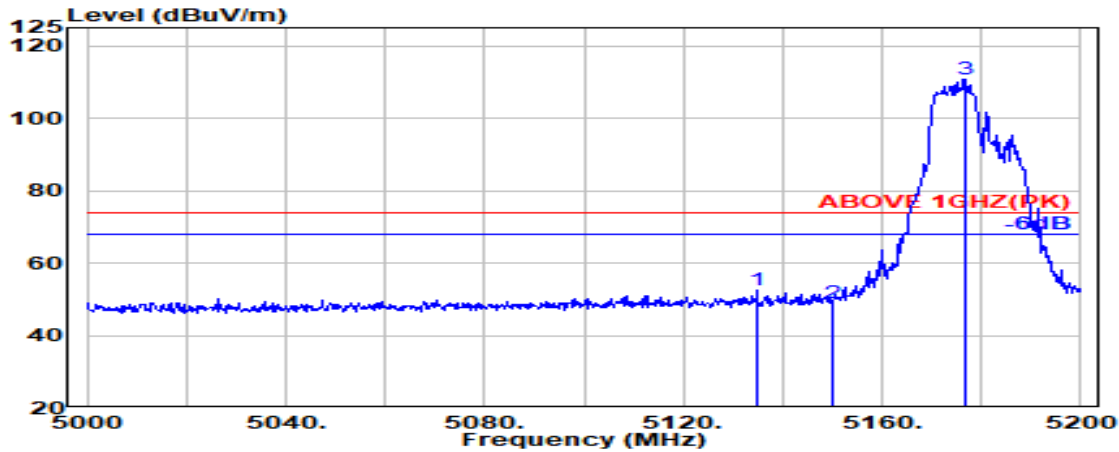

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.800	34.41	8.88	34.34	43.59	52.54	74.00	21.46	Peak
5150.000	34.50	8.89	34.34	40.07	49.12	74.00	24.88	Peak
@ 5176.600	34.61	8.90	34.33	101.56	110.74	---	---	Peak

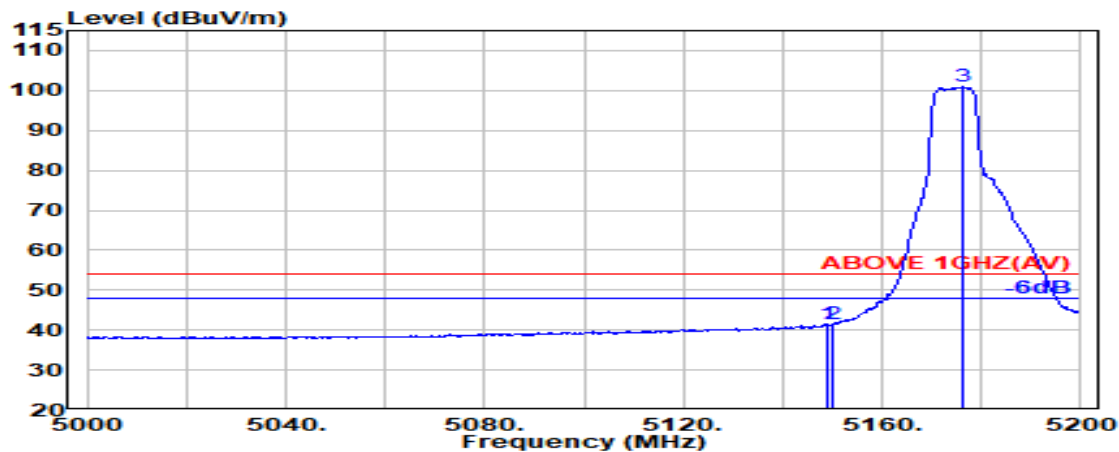


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.49	8.89	34.34	32.31	41.35	54.00	12.65	Average
5150.000	34.50	8.89	34.34	32.39	41.43	54.00	12.57	Average
@ 5176.000	34.60	8.90	34.33	91.73	100.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

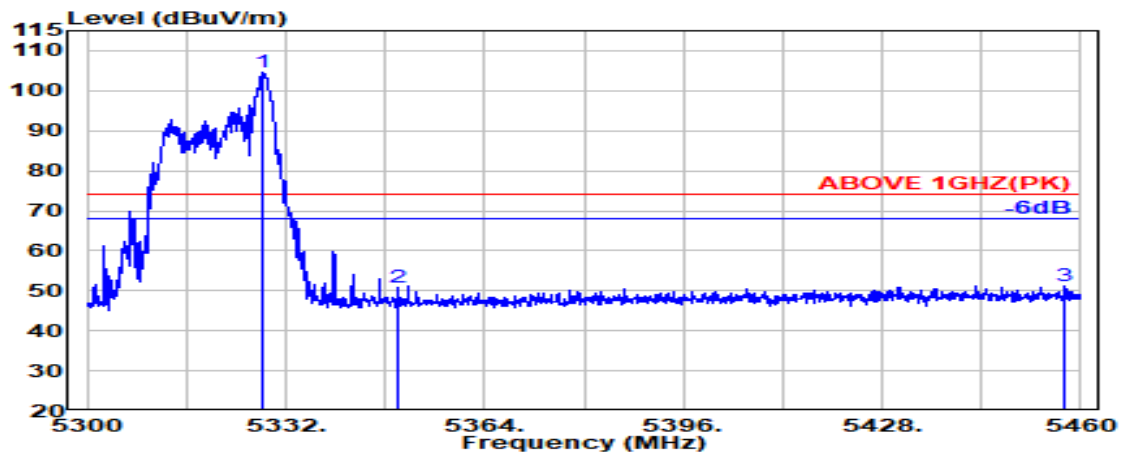

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	34.68	8.98	34.27	95.10	104.50	---	---	Peak
5350.000	34.90	9.00	34.26	41.03	50.67	74.00	23.33	Peak
5457.500	34.62	9.05	34.22	41.79	51.24	74.00	22.76	Peak

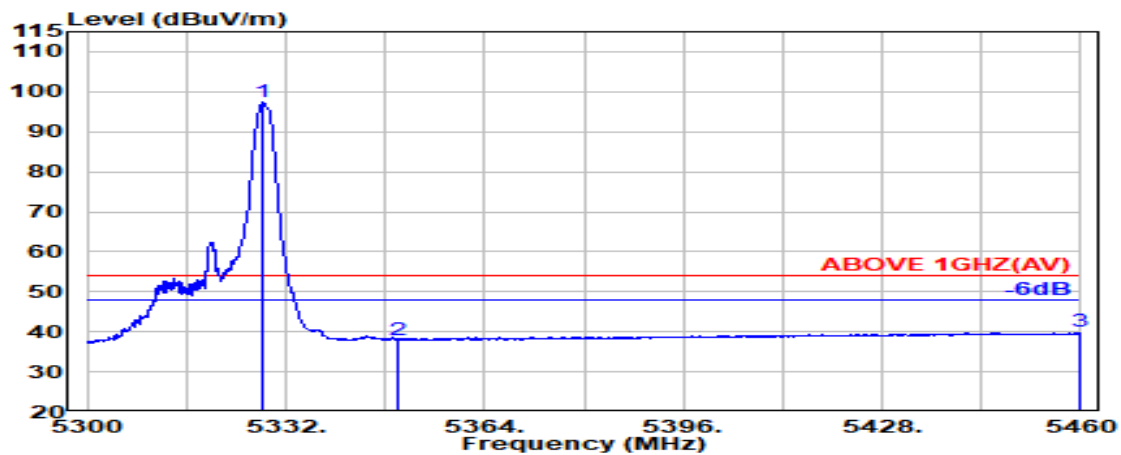


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	34.68	8.98	34.27	88.14	97.55	---	---	Average
5350.000	34.90	9.00	34.26	28.41	38.05	54.00	15.95	Average
5460.000	34.62	9.06	34.22	30.44	39.90	54.00	14.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

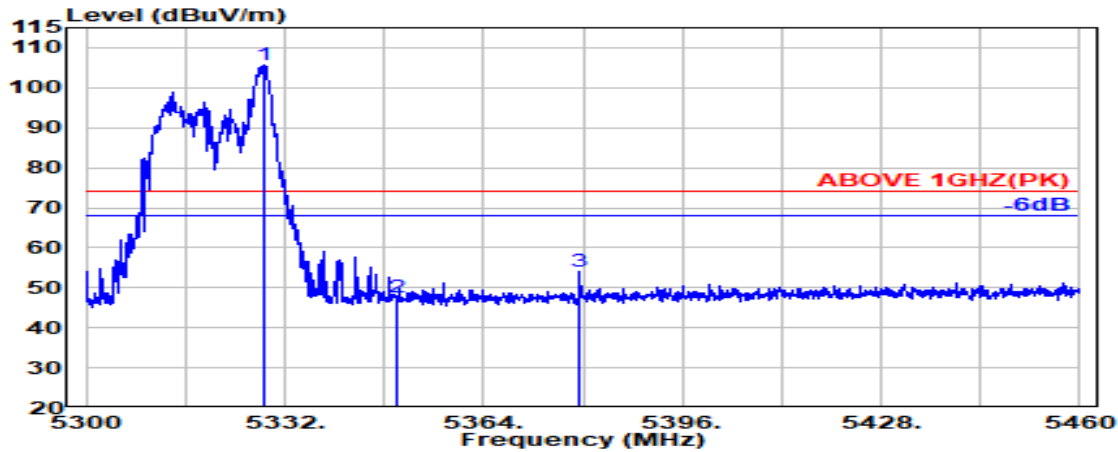

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	34.69	8.99	34.27	96.32	105.72	---	---	Peak
5350.000	34.90	9.00	34.26	37.80	47.44	74.00	26.56	Peak
5379.500	34.84	9.01	34.25	44.55	54.16	74.00	19.84	Peak

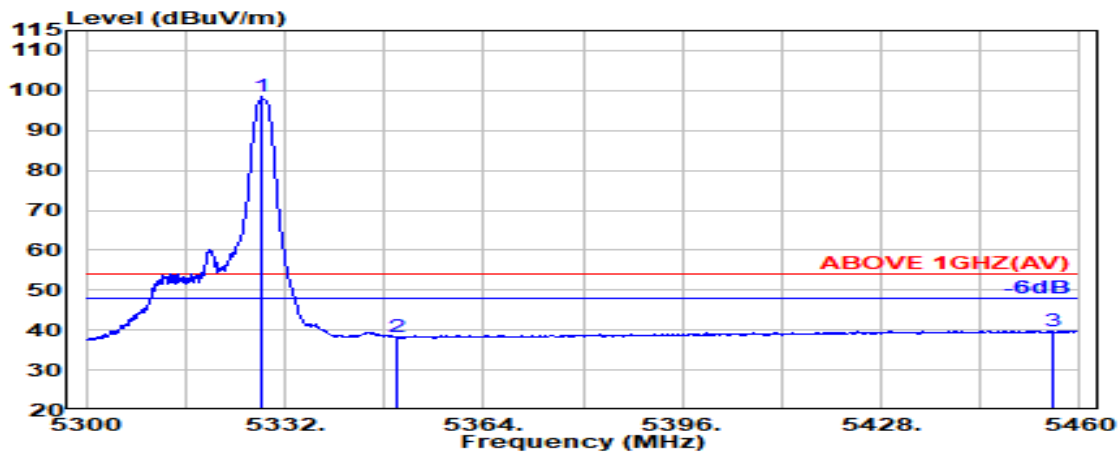


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	34.68	8.98	34.27	89.02	98.42	---	---	Average
5350.000	34.90	9.00	34.26	28.75	38.38	54.00	15.62	Average
5455.500	34.61	9.05	34.22	30.41	39.86	54.00	14.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

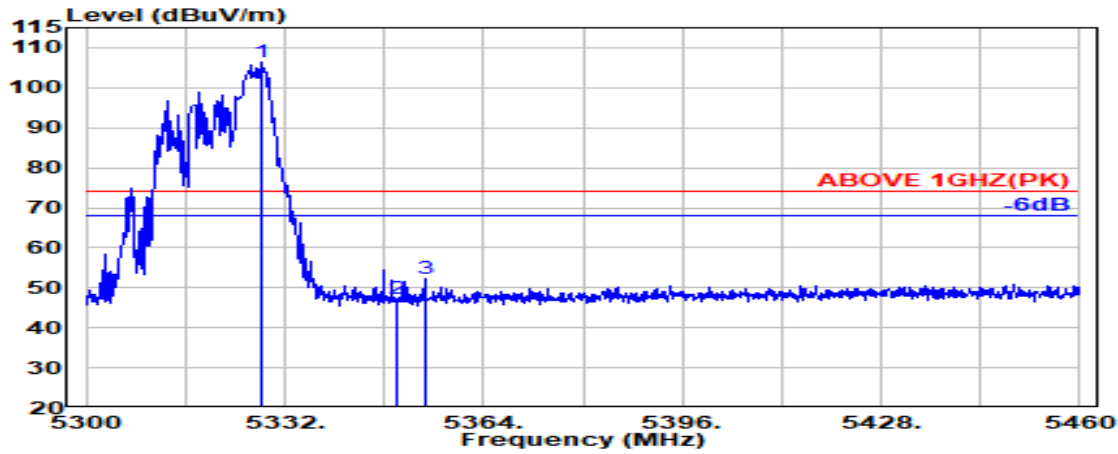

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.100	34.68	8.98	34.27	96.87	106.27	---	---	Peak
5350.000	34.90	9.00	34.26	37.69	47.33	74.00	26.67	Peak
5354.600	34.89	9.00	34.26	42.67	52.30	74.00	21.70	Peak

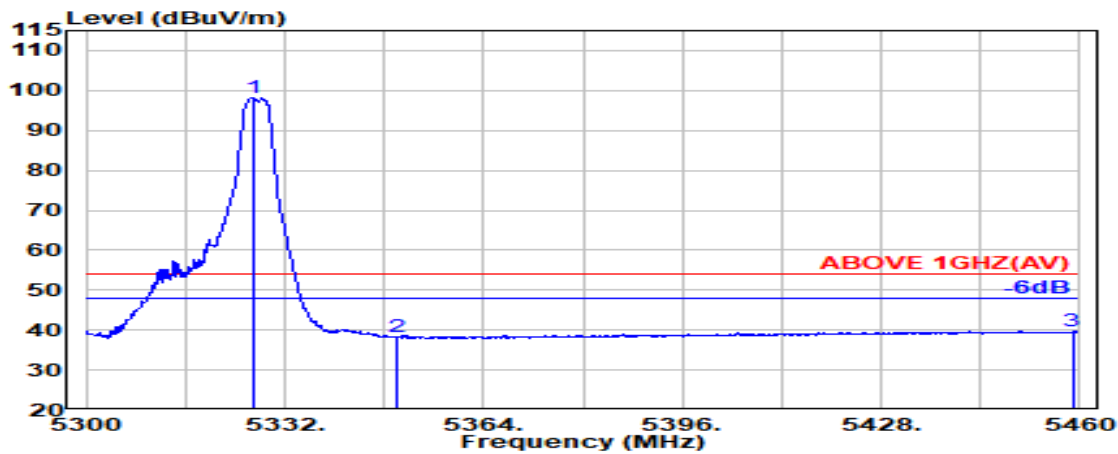


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.100	34.67	8.98	34.27	88.79	98.18	---	---	Average
5350.000	34.90	9.00	34.26	28.51	38.15	54.00	15.85	Average
5458.800	34.62	9.06	34.22	30.20	39.66	54.00	14.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

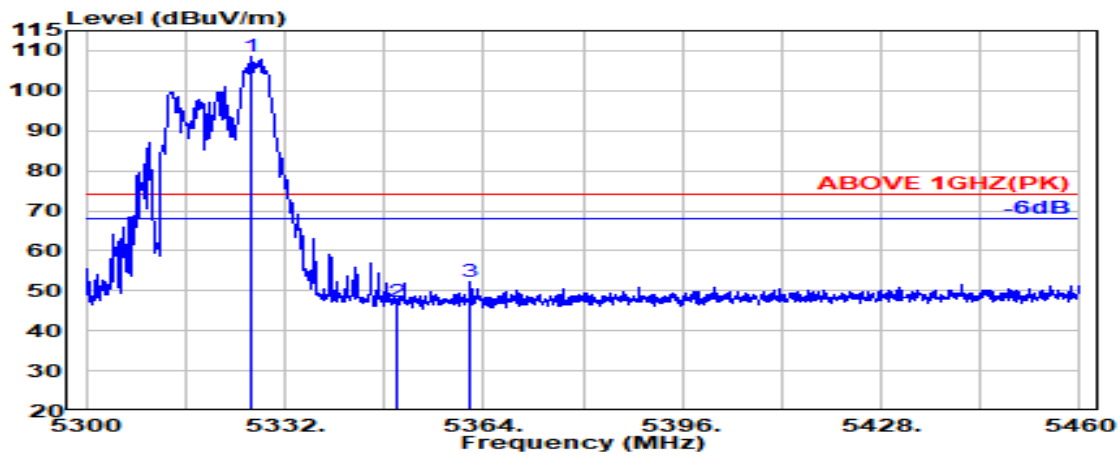

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.500	34.67	8.98	34.27	99.02	108.40	---	---	Peak
5350.000	34.90	9.00	34.26	37.53	47.16	74.00	26.84	Peak
5361.700	34.88	9.00	34.25	42.61	52.23	74.00	21.77	Peak

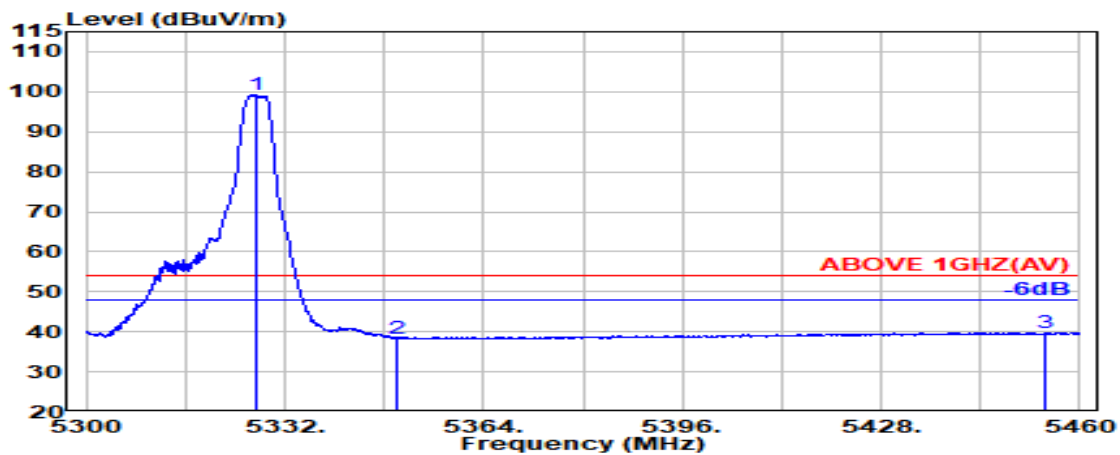


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	34.67	8.98	34.27	89.95	99.35	---	---	Average
5350.000	34.90	9.00	34.26	28.81	38.45	54.00	15.55	Average
5454.600	34.61	9.05	34.22	30.34	39.79	54.00	14.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

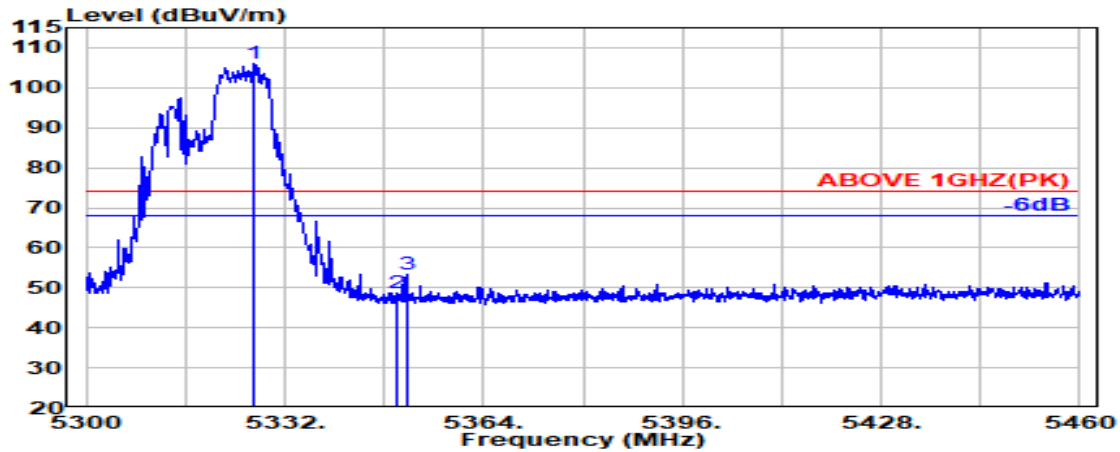

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	34.67	8.98	34.27	96.55	105.94	---	---	Peak
5350.000	34.90	9.00	34.26	38.96	48.59	74.00	25.41	Peak
5351.700	34.90	9.00	34.26	43.63	53.26	74.00	20.74	Peak

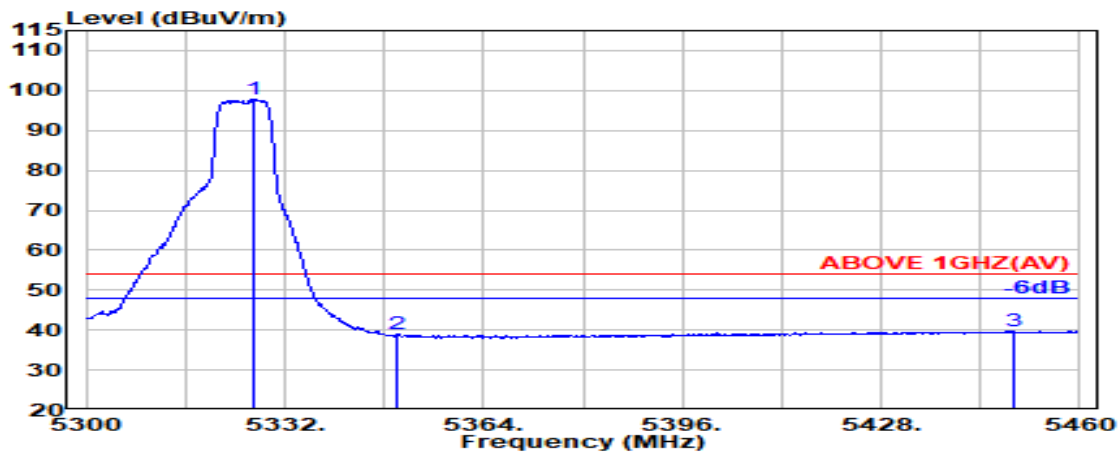


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.000	34.67	8.98	34.27	88.37	97.76	---	---	Average
5350.000	34.90	9.00	34.26	29.28	38.92	54.00	15.08	Average
5449.200	34.60	9.05	34.22	30.36	39.80	54.00	14.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

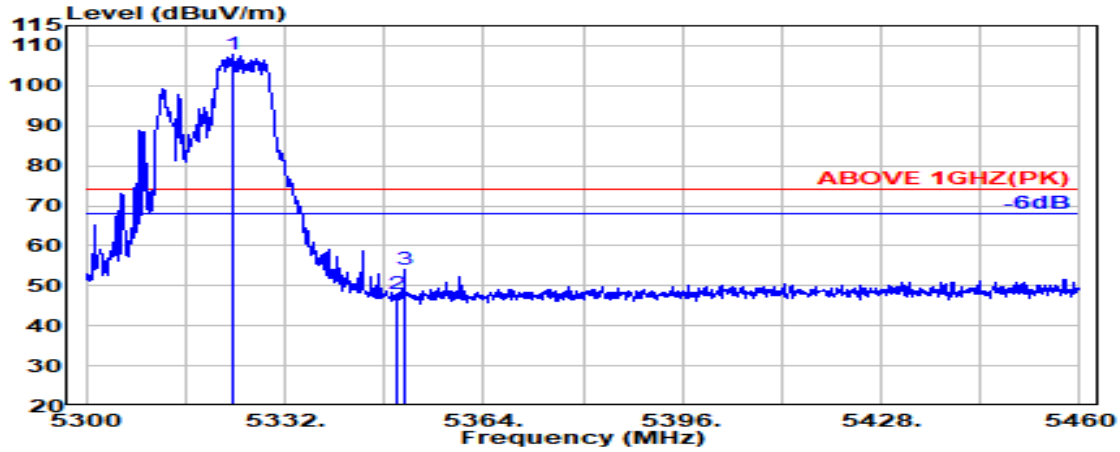

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	34.64	8.98	34.27	98.49	107.84	---	---	Peak
5350.000	34.90	9.00	34.26	38.29	47.93	74.00	26.07	Peak
5351.200	34.90	9.00	34.26	44.56	54.20	74.00	19.80	Peak

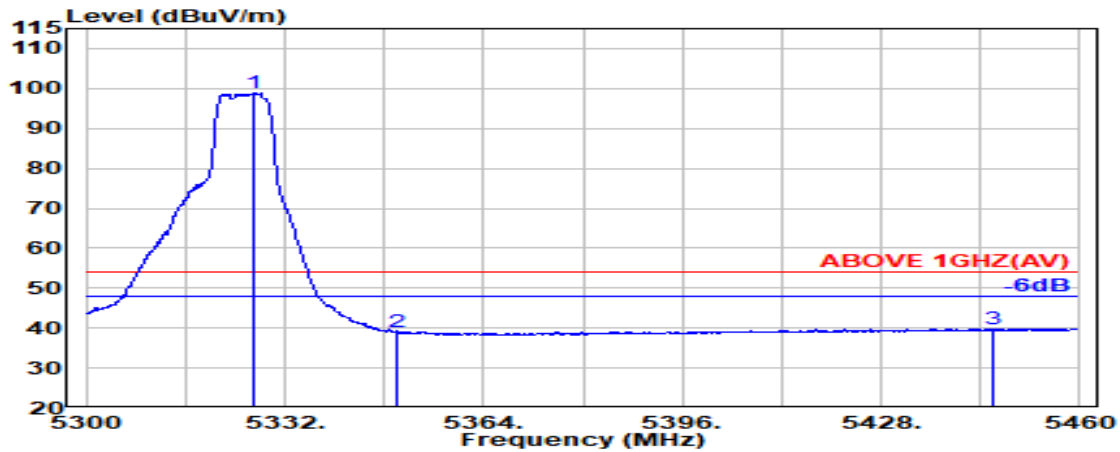


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	34.67	8.98	34.27	89.46	98.85	---	---	Average
5350.000	34.90	9.00	34.26	29.39	39.02	54.00	14.98	Average
5446.100	34.62	9.05	34.22	30.39	39.83	54.00	14.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

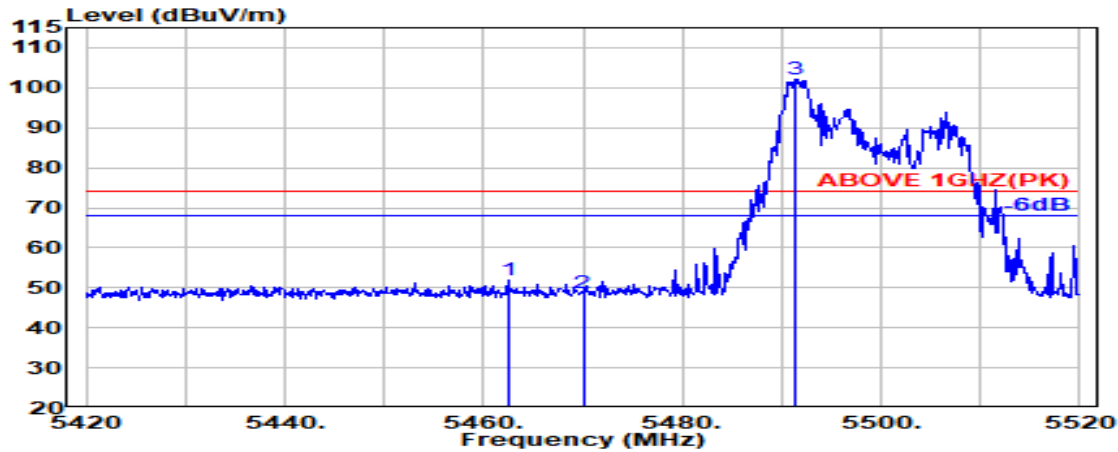

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.63	9.06	34.21	42.38	51.85	74.00	22.15	Peak
5470.000	34.64	9.06	34.21	39.11	48.60	74.00	25.40	Peak
@ 5491.400	34.68	9.07	34.20	92.65	102.20	---	---	Peak

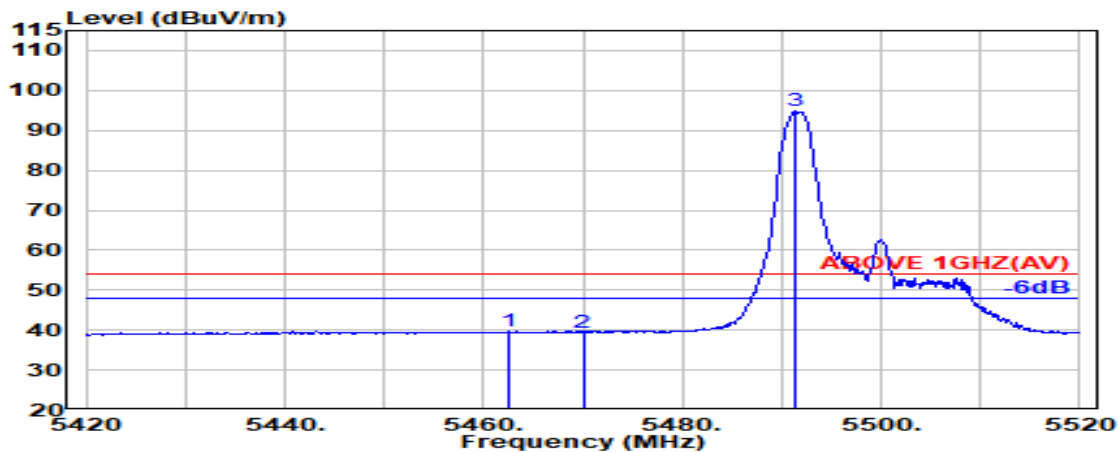


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.63	9.06	34.21	30.22	39.69	54.00	14.31	Average
5470.000	34.64	9.06	34.21	29.89	39.38	54.00	14.62	Average
@ 5491.300	34.68	9.07	34.20	85.22	94.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

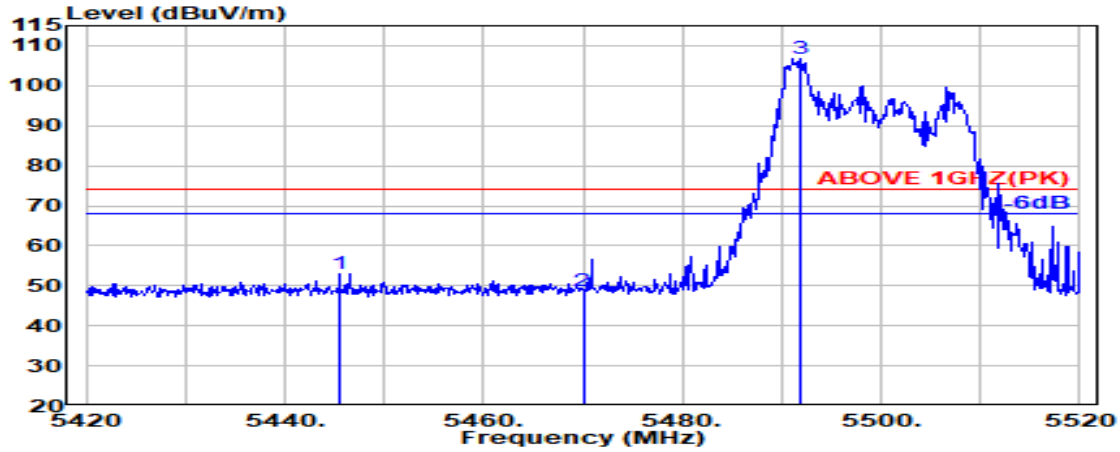

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.500	34.62	9.05	34.22	43.47	52.91	74.00	21.09	Peak
5470.000	34.64	9.06	34.21	39.13	48.62	74.00	25.38	Peak
@ 5491.800	34.68	9.07	34.20	97.30	106.85	---	---	Peak

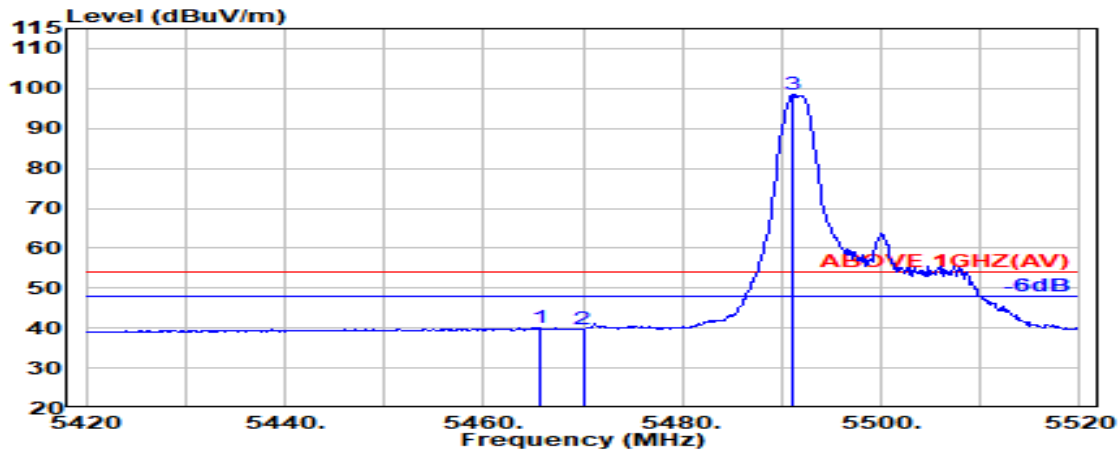


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.63	9.06	34.21	30.51	39.99	54.00	14.01	Average
5470.000	34.64	9.06	34.21	30.21	39.70	54.00	14.30	Average
@ 5491.200	34.68	9.07	34.20	88.94	98.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

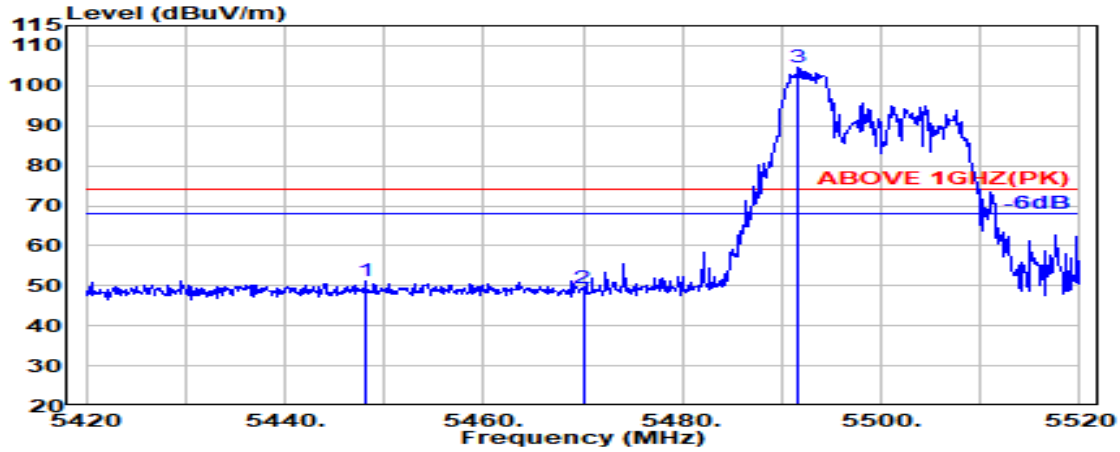

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.100	34.61	9.05	34.22	41.93	51.37	74.00	22.63	Peak
5470.000	34.64	9.06	34.21	39.91	49.40	74.00	24.60	Peak
@ 5491.700	34.68	9.07	34.20	95.06	104.62	---	---	Peak

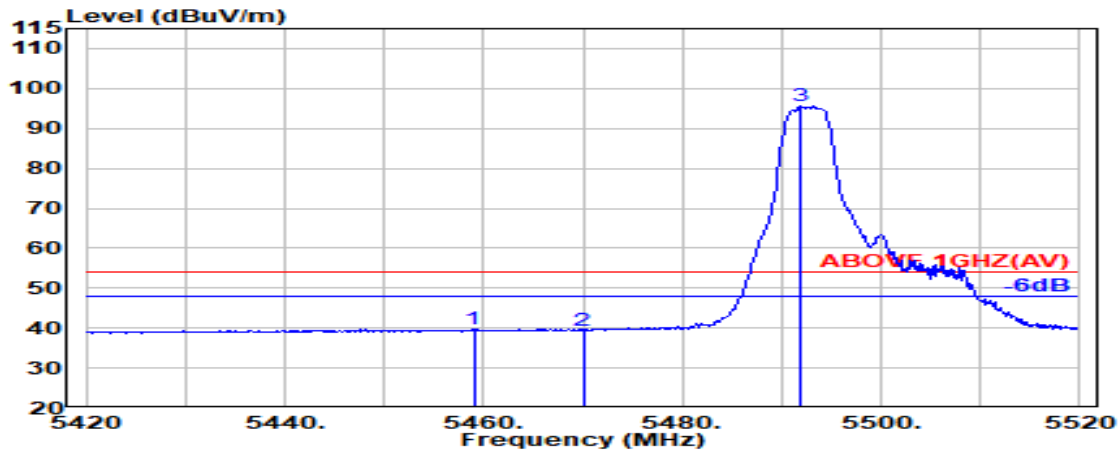


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.62	9.06	34.22	30.28	39.74	54.00	14.26	Average
5470.000	34.64	9.06	34.21	29.91	39.40	54.00	14.60	Average
@ 5491.900	34.68	9.07	34.20	86.02	95.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

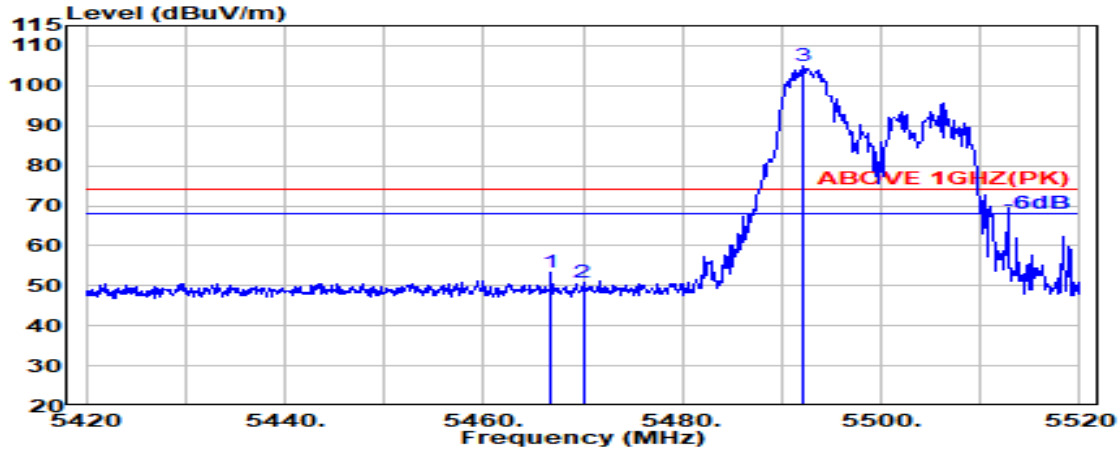

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.63	9.06	34.21	43.91	53.39	74.00	20.61	Peak
5470.000	34.64	9.06	34.21	41.50	50.99	74.00	23.01	Peak
@ 5492.200	34.68	9.07	34.20	95.59	105.14	---	---	Peak

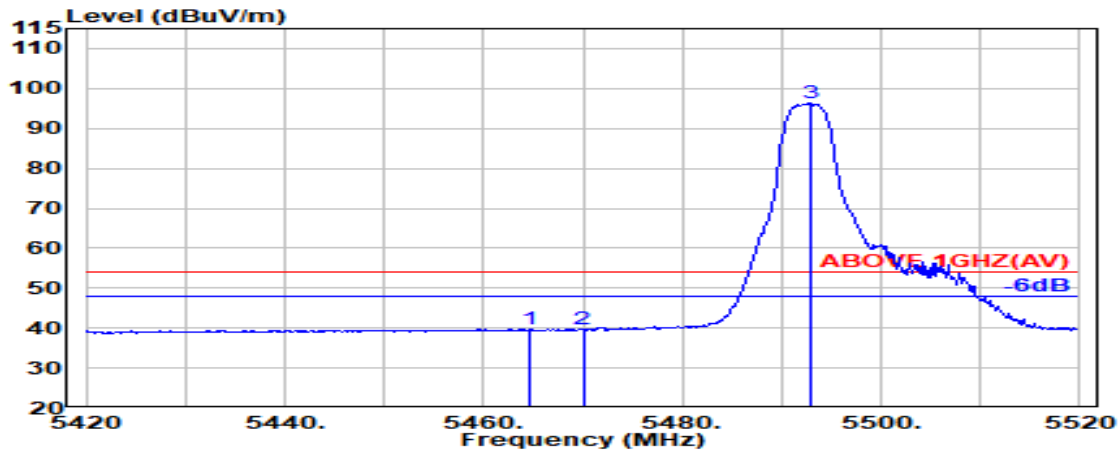


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.63	9.06	34.21	30.27	39.74	54.00	14.26	Average
5470.000	34.64	9.06	34.21	30.10	39.59	54.00	14.41	Average
@ 5493.000	34.69	9.07	34.20	86.77	96.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

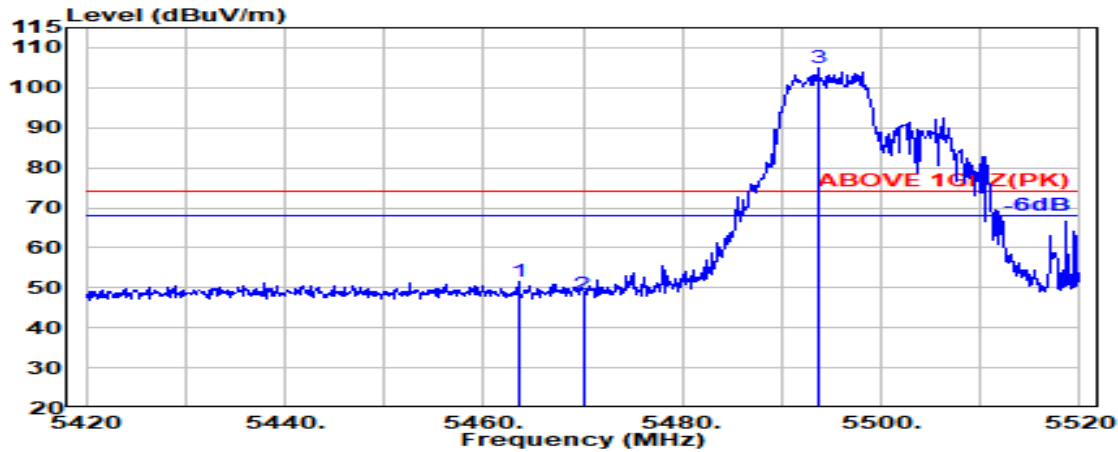

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.63	9.06	34.21	41.93	51.40	74.00	22.60	Peak
5470.000	34.64	9.06	34.21	38.89	48.38	74.00	25.62	Peak
@ 5493.600	34.69	9.07	34.20	95.55	105.11	---	---	Peak

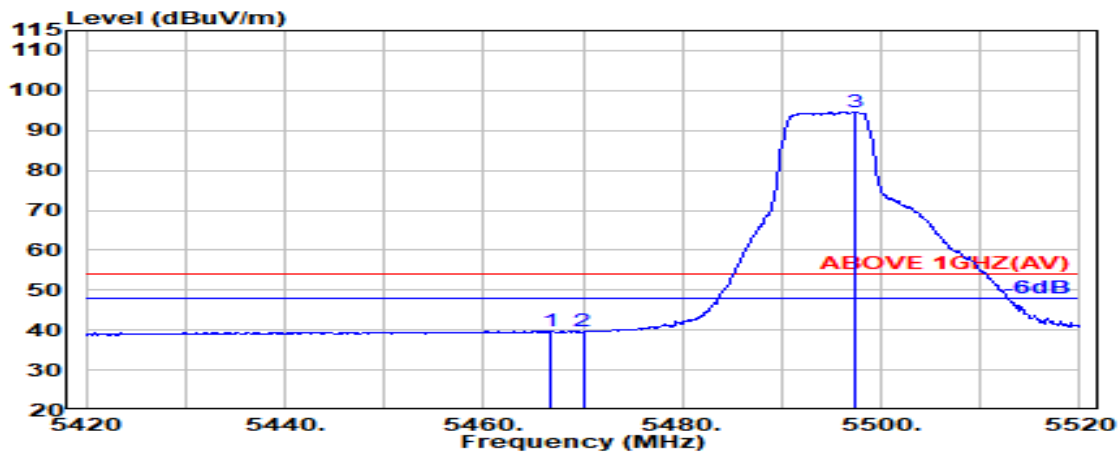


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.63	9.06	34.21	30.30	39.78	54.00	14.22	Average
5470.000	34.64	9.06	34.21	30.07	39.56	54.00	14.44	Average
@ 5497.500	34.70	9.08	34.20	85.12	94.69	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

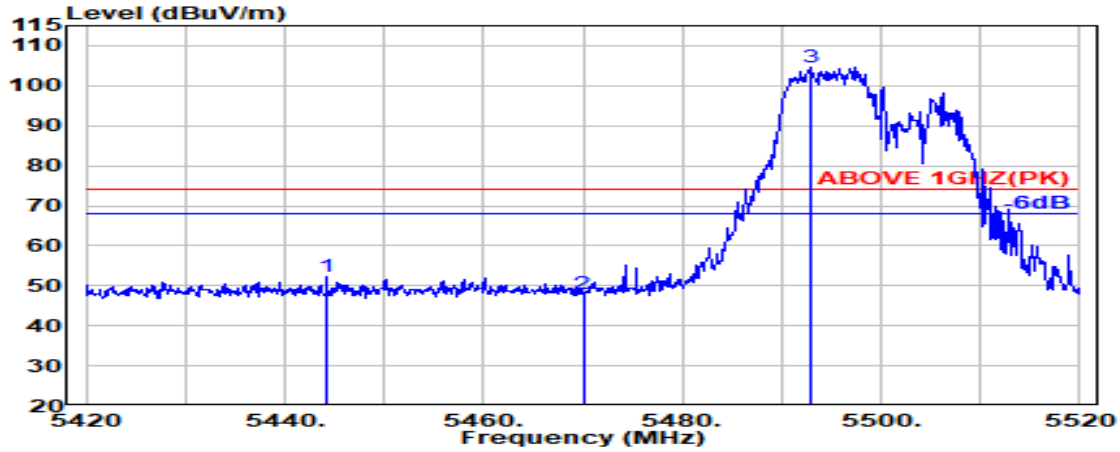

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.200	34.62	9.05	34.22	42.69	52.14	74.00	21.86	Peak
5470.000	34.64	9.06	34.21	38.55	48.04	74.00	25.96	Peak
@ 5493.000	34.69	9.07	34.20	95.20	104.76	---	---	Peak

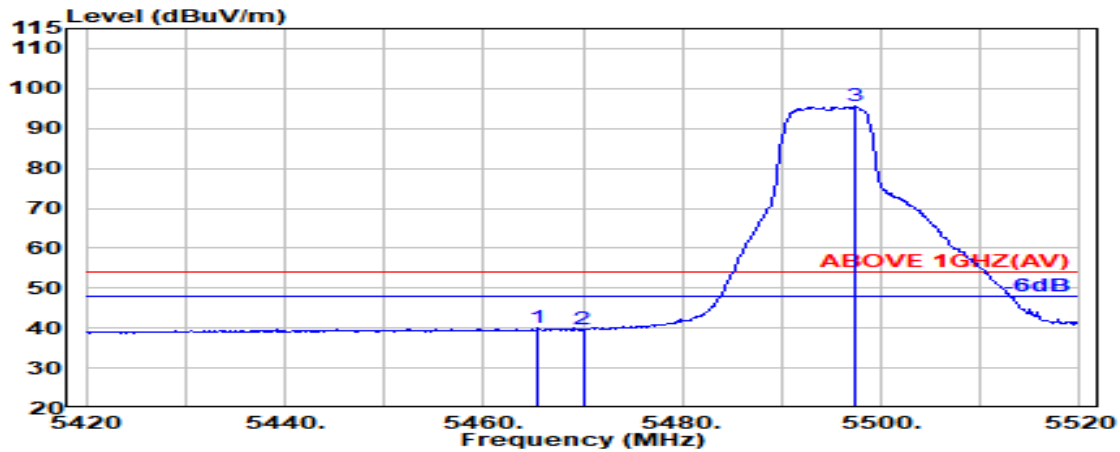


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.400	34.63	9.06	34.21	30.49	39.96	54.00	14.04	Average
5470.000	34.64	9.06	34.21	30.05	39.54	54.00	14.46	Average
@ 5497.500	34.70	9.08	34.20	85.91	95.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

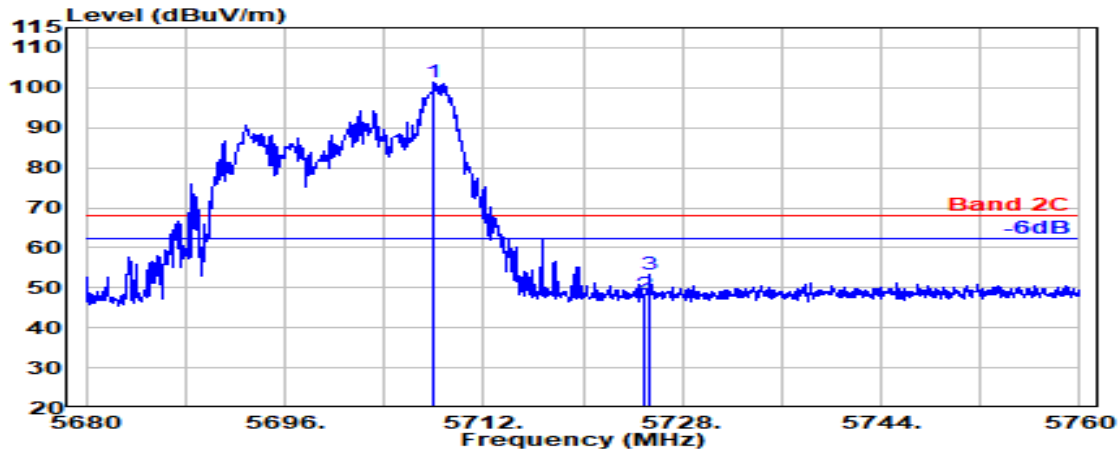

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.900	34.75	9.18	34.30	91.89	101.52	---	---	Peak
5725.000	34.85	9.19	34.31	38.43	48.17	68.20	20.03	Peak
5725.400	34.85	9.19	34.31	43.45	53.19	68.20	15.01	Peak

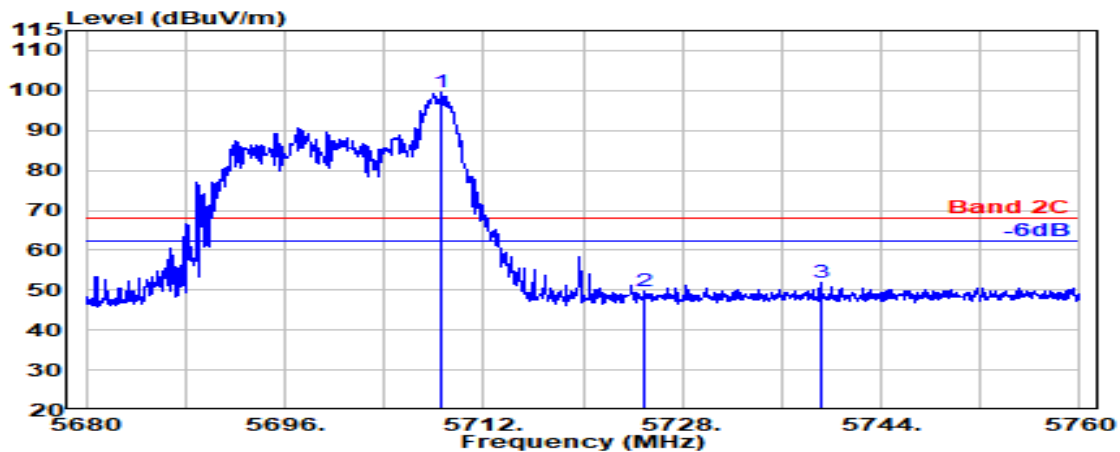


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.600	34.75	9.19	34.30	90.02	99.66	---	---	Peak
5725.000	34.85	9.19	34.31	39.97	49.71	68.20	18.49	Peak
5739.150	34.94	9.20	34.31	42.05	51.87	68.20	16.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

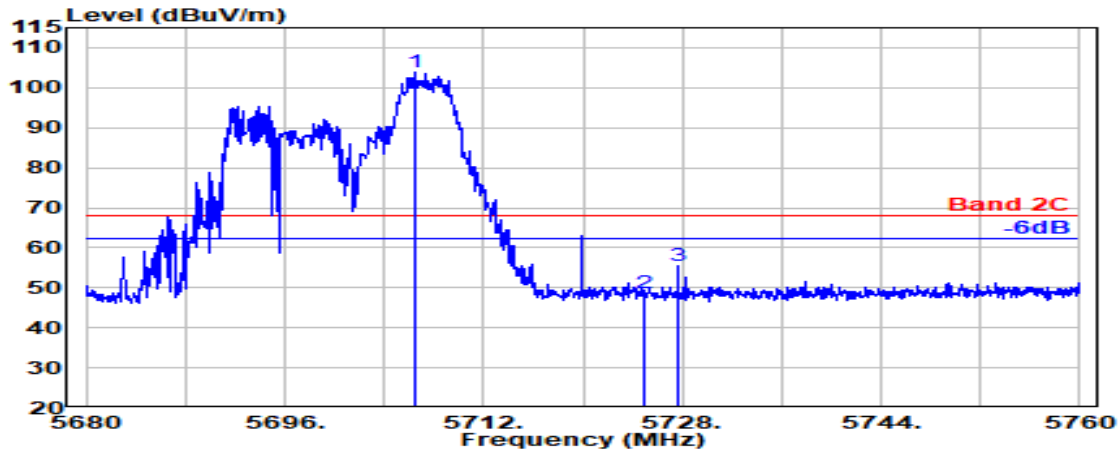

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.450	34.74	9.18	34.30	94.16	103.78	---	---	Peak
5725.000	34.85	9.19	34.31	38.86	48.59	68.20	19.61	Peak
5727.700	34.87	9.19	34.31	45.76	55.52	68.20	12.68	Peak

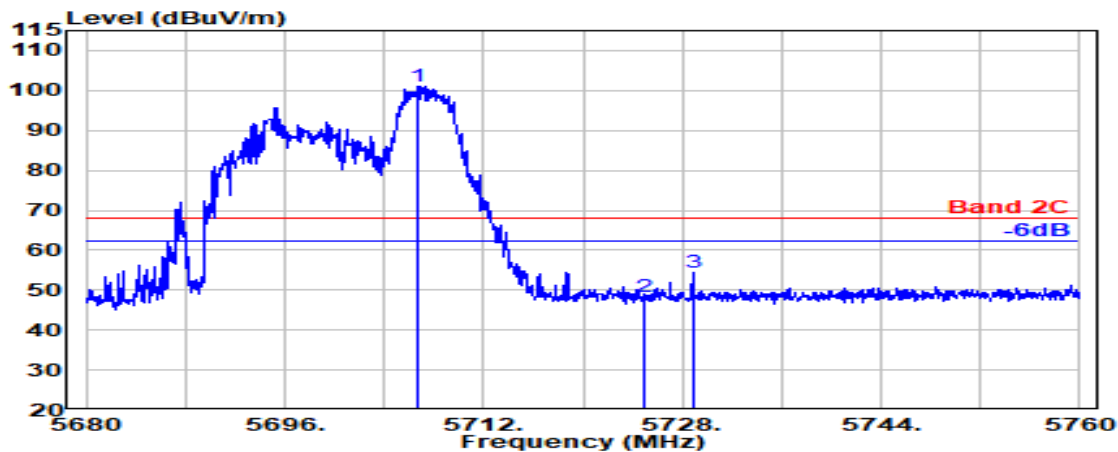


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.750	34.74	9.18	34.30	91.48	101.11	---	---	Peak
5725.000	34.85	9.19	34.31	38.56	48.30	68.20	19.90	Peak
5728.850	34.87	9.20	34.31	44.62	54.38	68.20	13.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

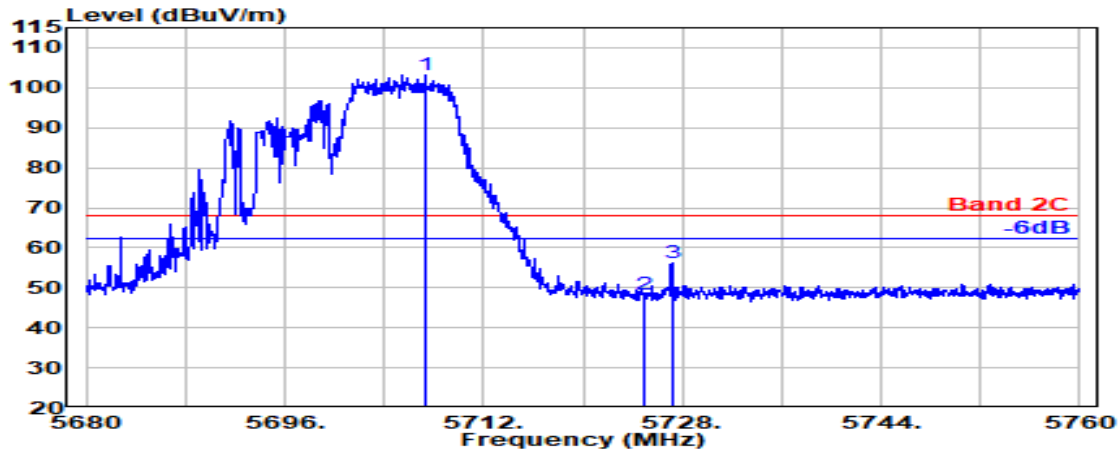

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.300	34.74	9.18	34.30	93.54	103.17	---	---	Peak
5725.000	34.85	9.19	34.31	38.42	48.16	68.20	20.04	Peak
5727.150	34.86	9.19	34.31	46.31	56.06	68.20	12.14	Peak

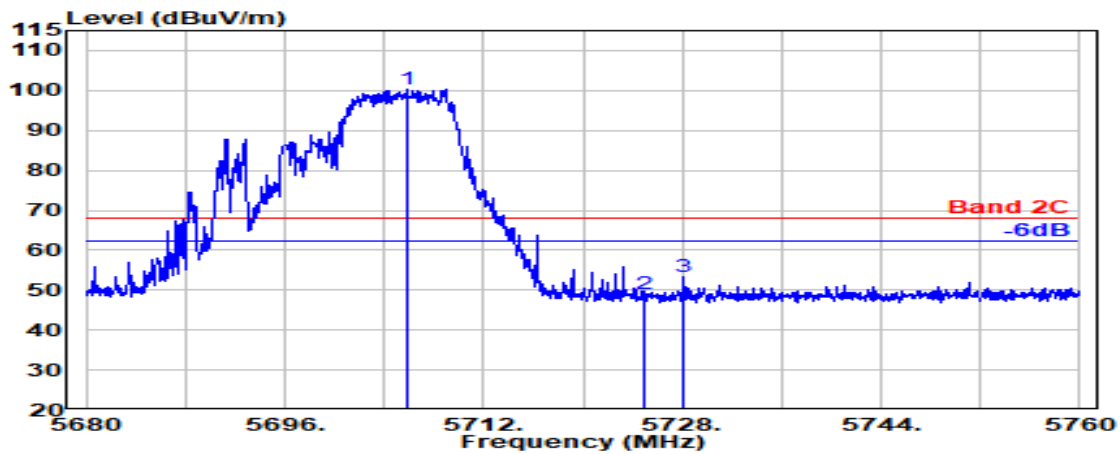


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.900	34.74	9.18	34.30	90.82	100.45	---	---	Peak
5725.000	34.85	9.19	34.31	39.22	48.96	68.20	19.24	Peak
5728.150	34.87	9.20	34.31	43.57	53.32	68.20	14.88	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

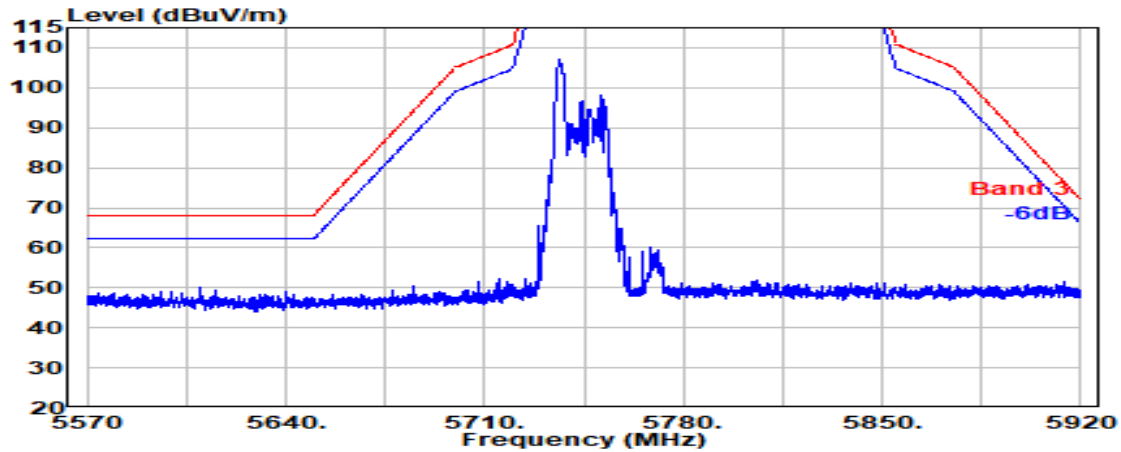


Antenna at Vertical Polarization

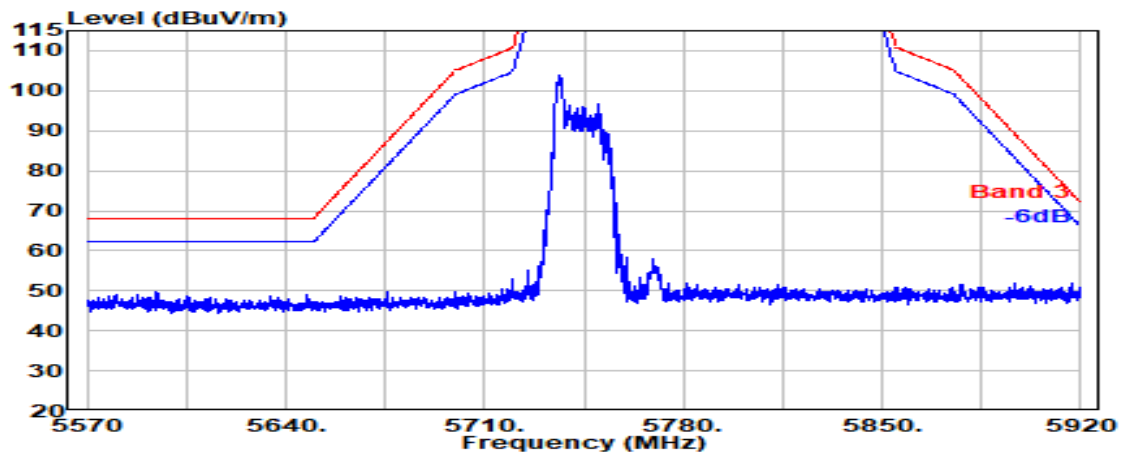


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

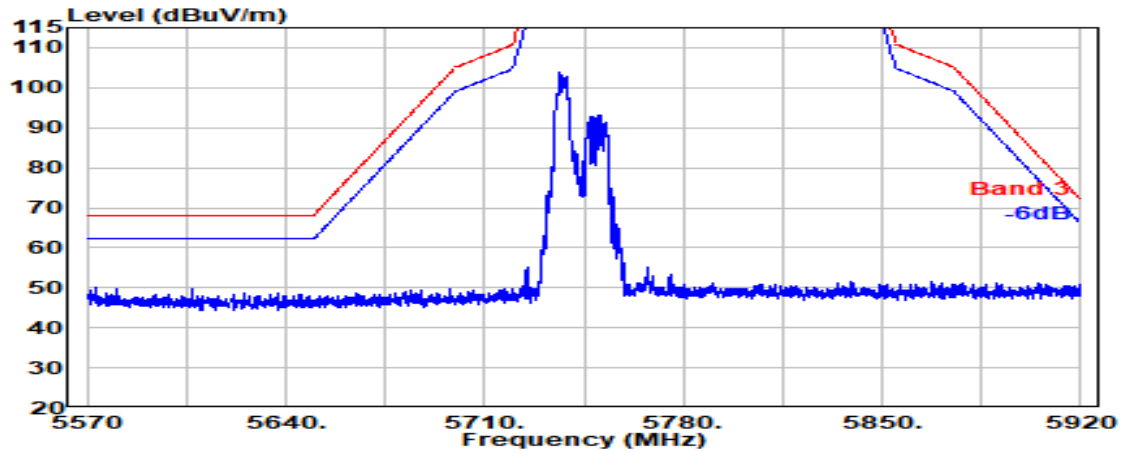


Antenna at Vertical Polarization

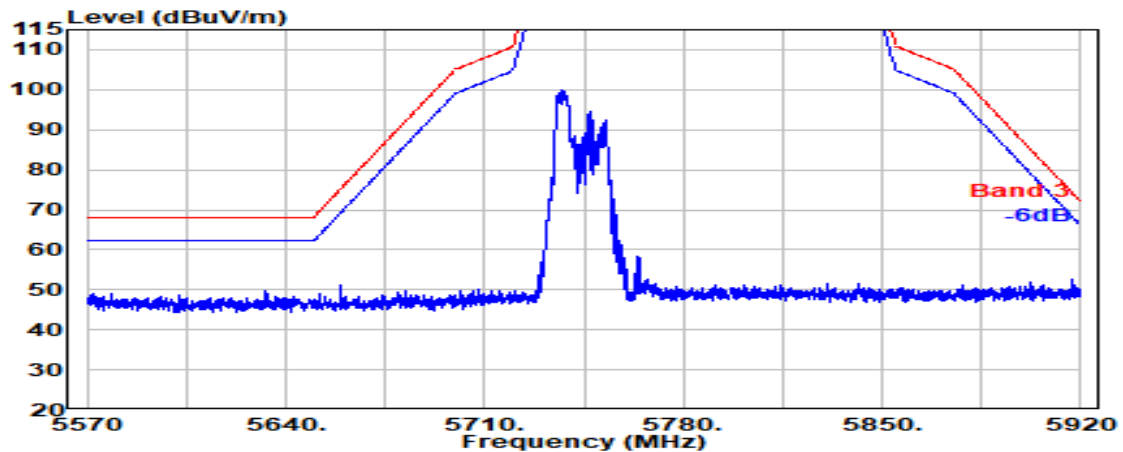


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

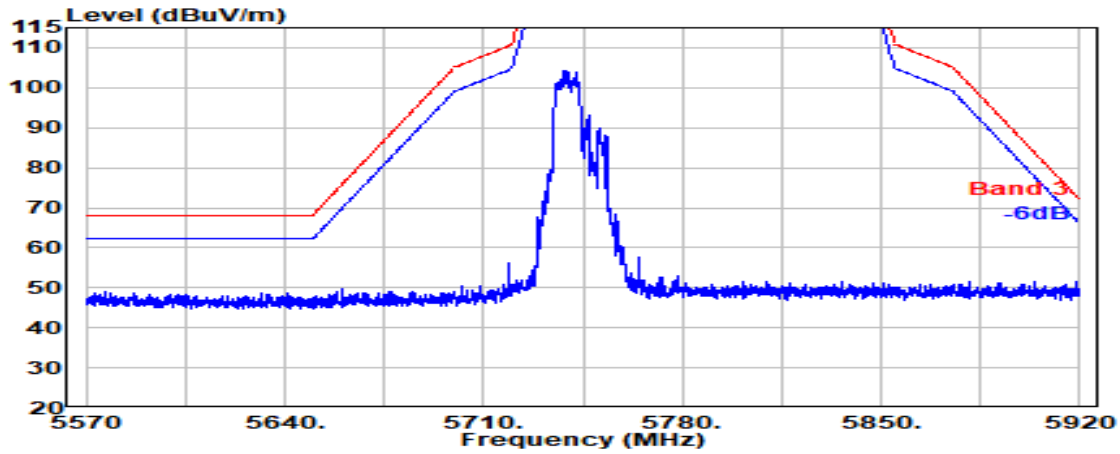


Antenna at Vertical Polarization

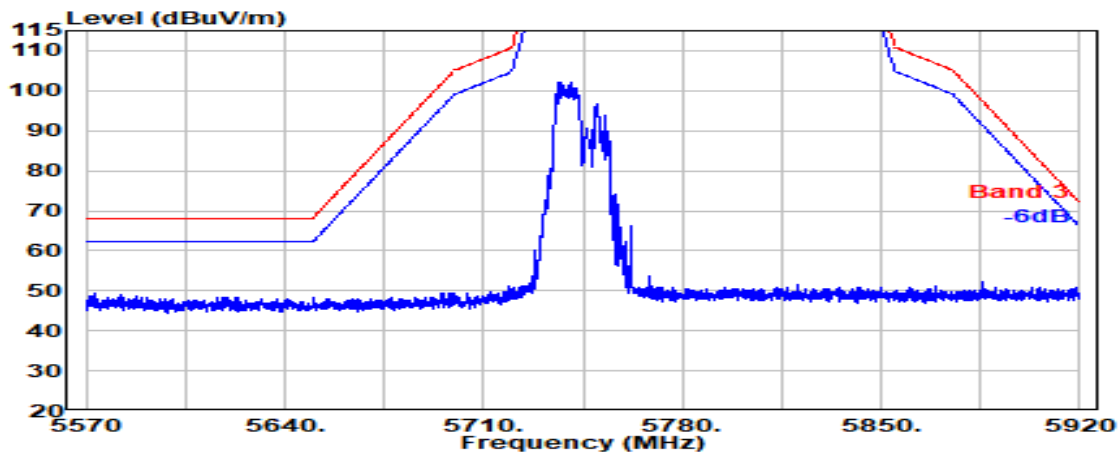


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

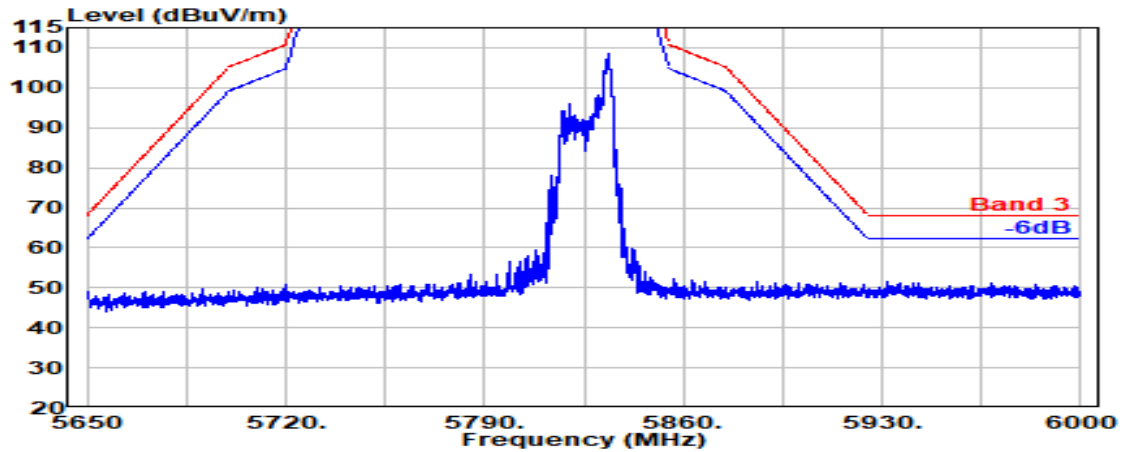


Antenna at Vertical Polarization

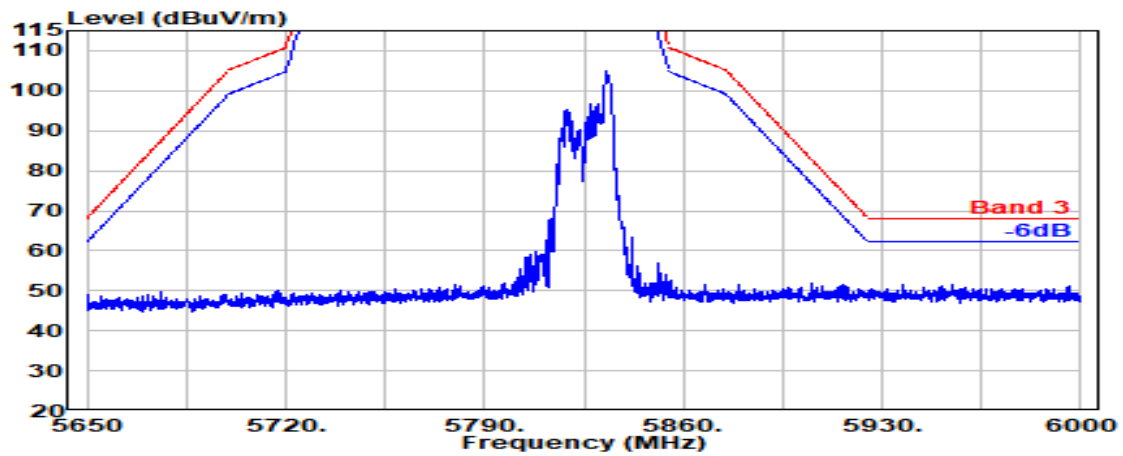


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

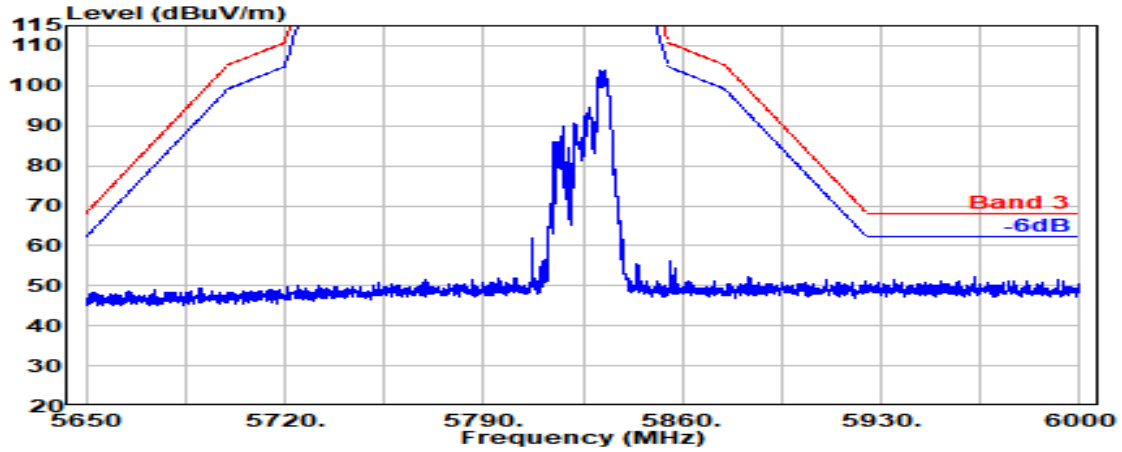


Antenna at Vertical Polarization

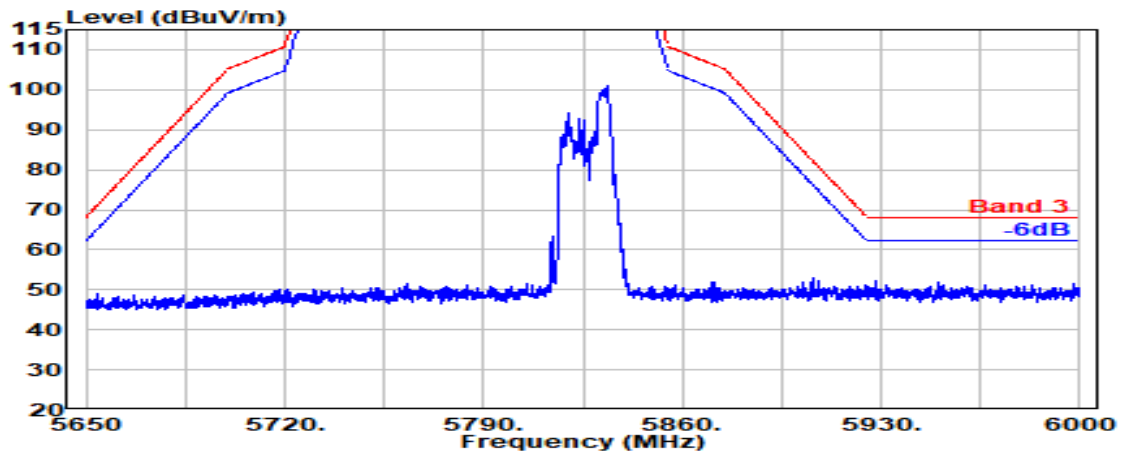


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

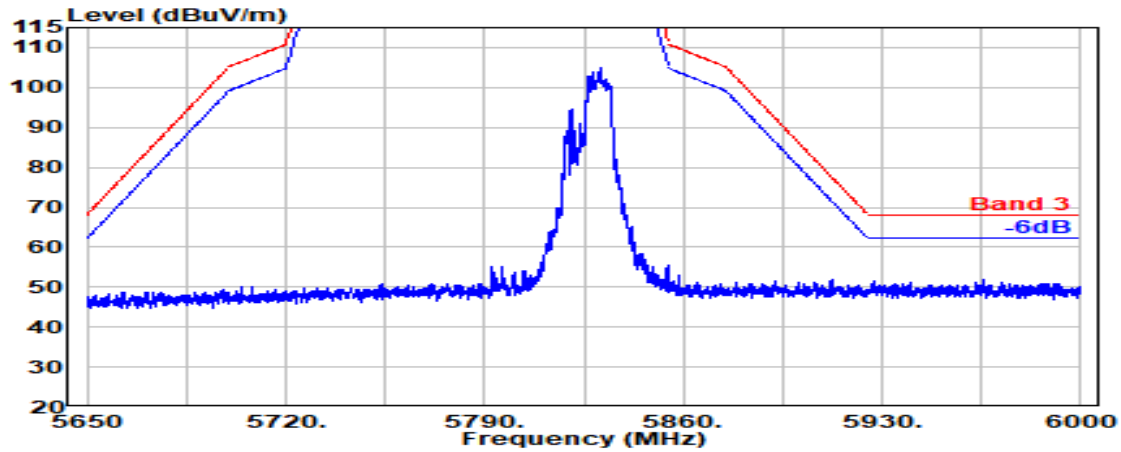

Antenna at Vertical Polarization

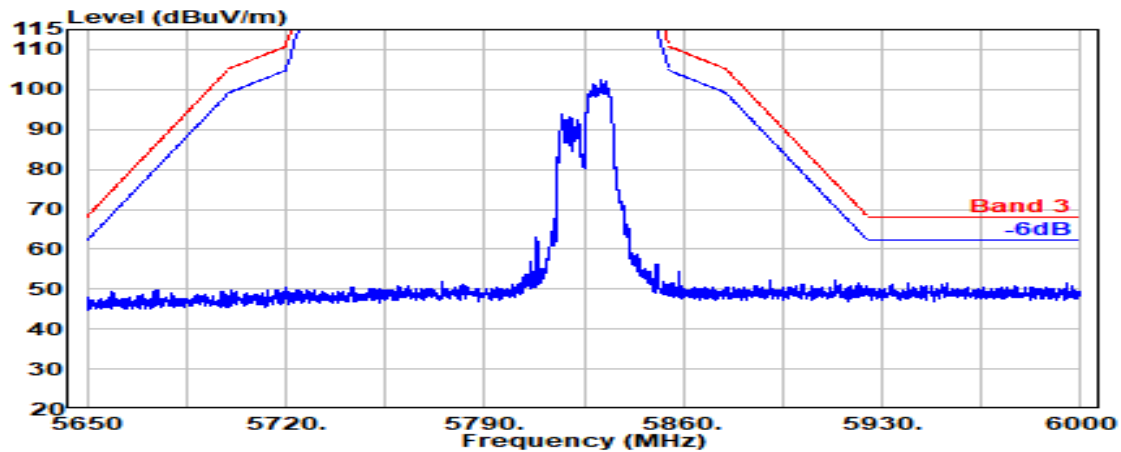


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

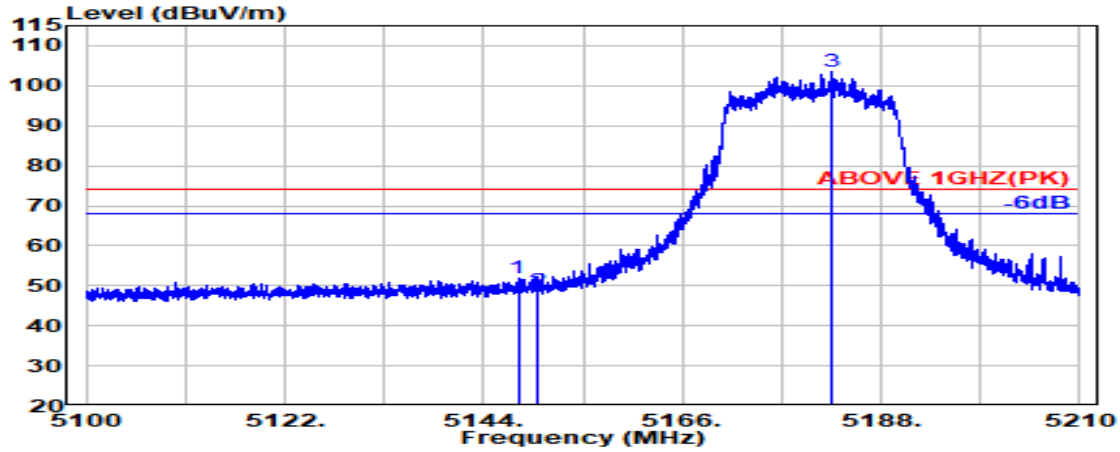

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.803	34.49	8.88	34.34	42.74	51.77	74.00	22.23	Peak
5150.000	34.50	8.89	34.34	39.77	48.82	74.00	25.18	Peak
@ 5182.657	34.63	8.90	34.32	94.20	103.41	---	---	Peak

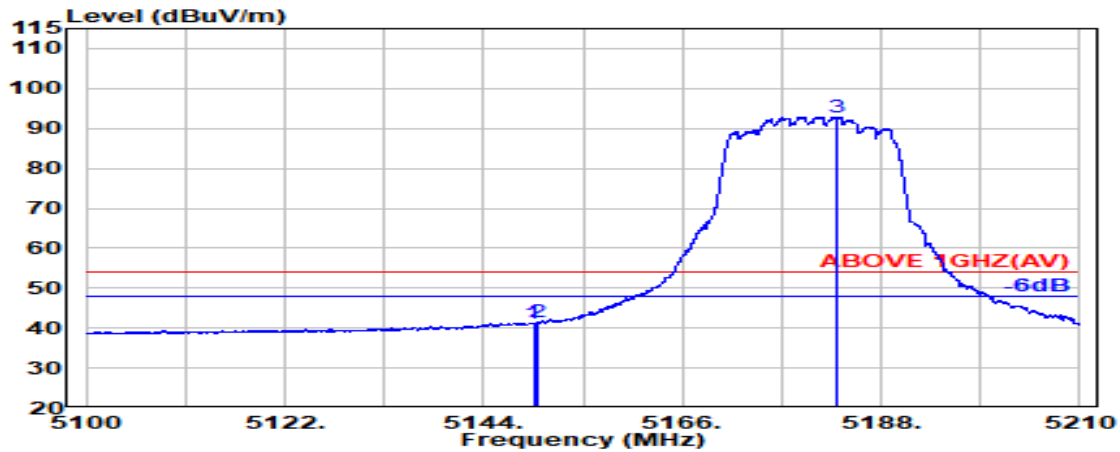


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.531	34.50	8.89	34.34	32.27	41.31	54.00	12.69	Average
5150.000	34.50	8.89	34.34	32.38	41.43	54.00	12.57	Average
@ 5183.066	34.63	8.90	34.32	83.70	92.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

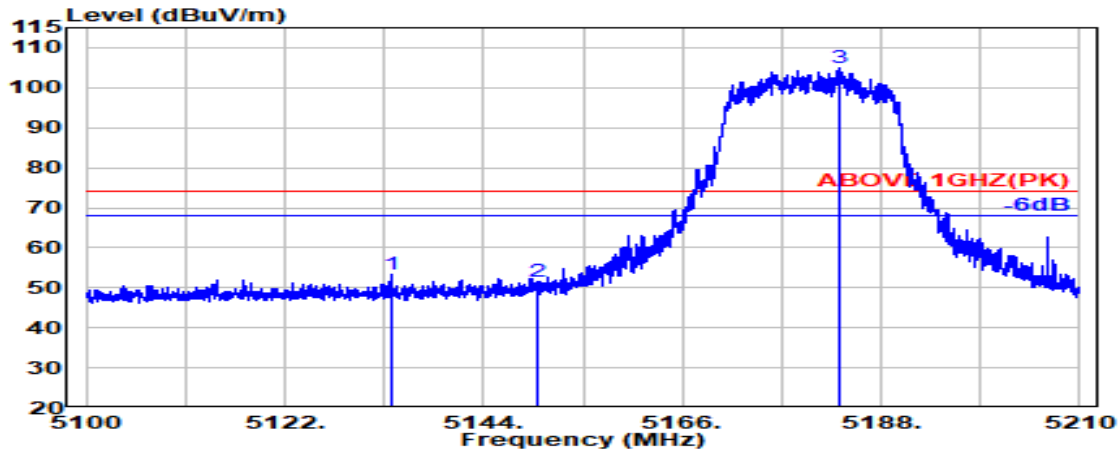

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.691	34.40	8.88	34.34	44.40	53.33	74.00	20.67	Peak
5150.000	34.50	8.89	34.34	42.43	51.47	74.00	22.53	Peak
@ 5183.286	34.63	8.90	34.32	95.85	105.07	---	---	Peak

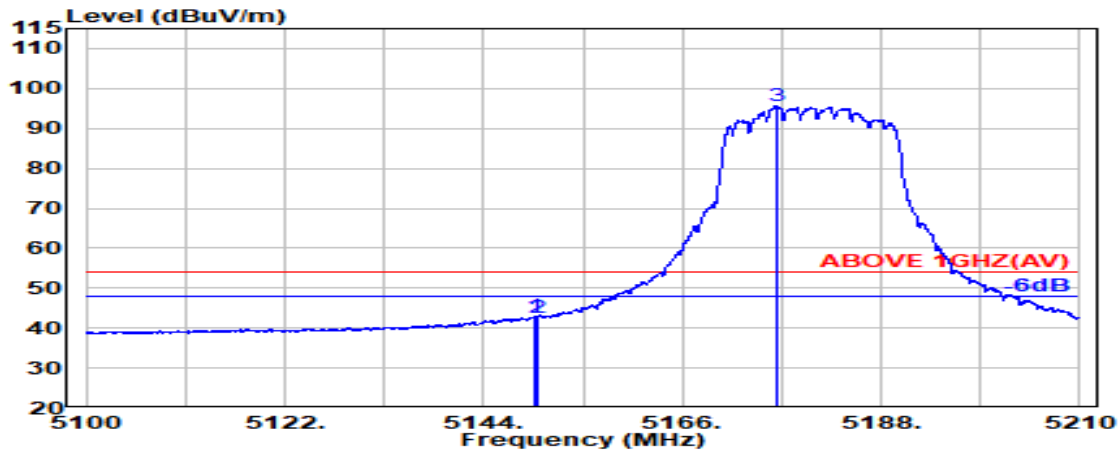


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.625	34.50	8.89	34.34	33.74	42.78	54.00	11.22	Average
5150.000	34.50	8.89	34.34	33.46	42.51	54.00	11.49	Average
@ 5176.340	34.61	8.90	34.33	86.46	95.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

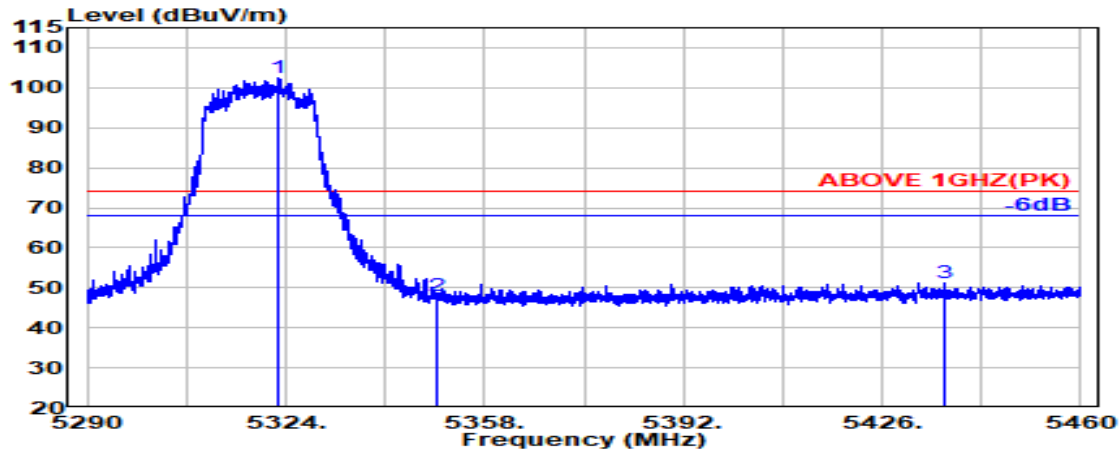

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.543	34.63	8.98	34.27	93.17	102.51	---	---	Peak
5350.000	34.90	9.00	34.26	38.26	47.90	74.00	26.10	Peak
5436.637	34.65	9.04	34.22	41.81	51.29	74.00	22.71	Peak

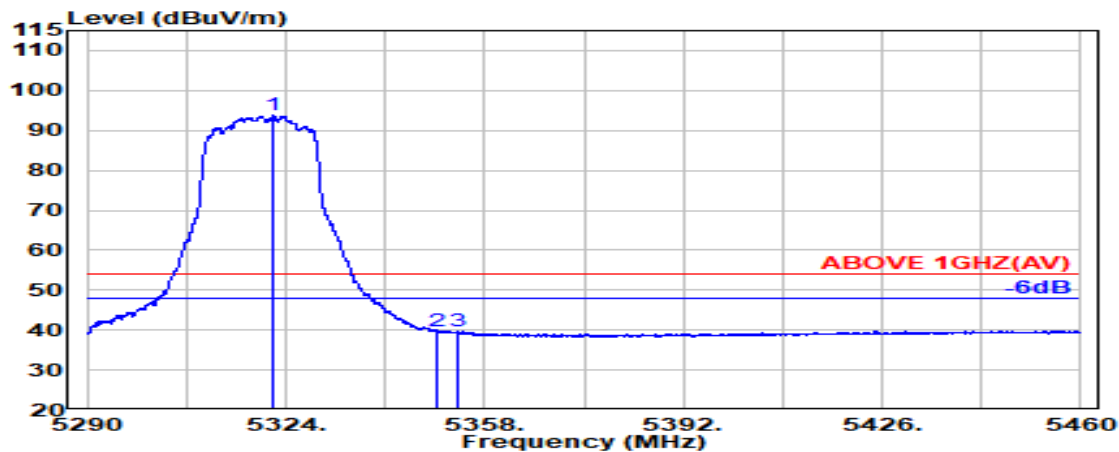


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.814	34.62	8.98	34.27	84.37	93.70	---	---	Average
5350.000	34.90	9.00	34.26	30.14	39.78	54.00	14.22	Average
5353.483	34.89	9.00	34.26	30.14	39.78	54.00	14.22	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

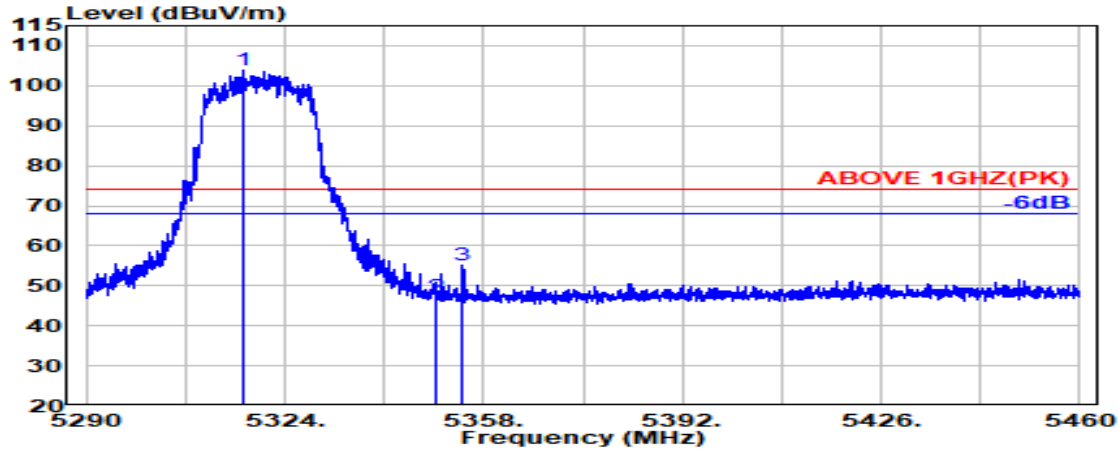

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.714	34.57	8.98	34.27	94.78	104.05	---	---	Peak
5350.000	34.90	9.00	34.26	37.56	47.19	74.00	26.81	Peak
5354.503	34.89	9.00	34.26	45.53	55.17	74.00	18.83	Peak

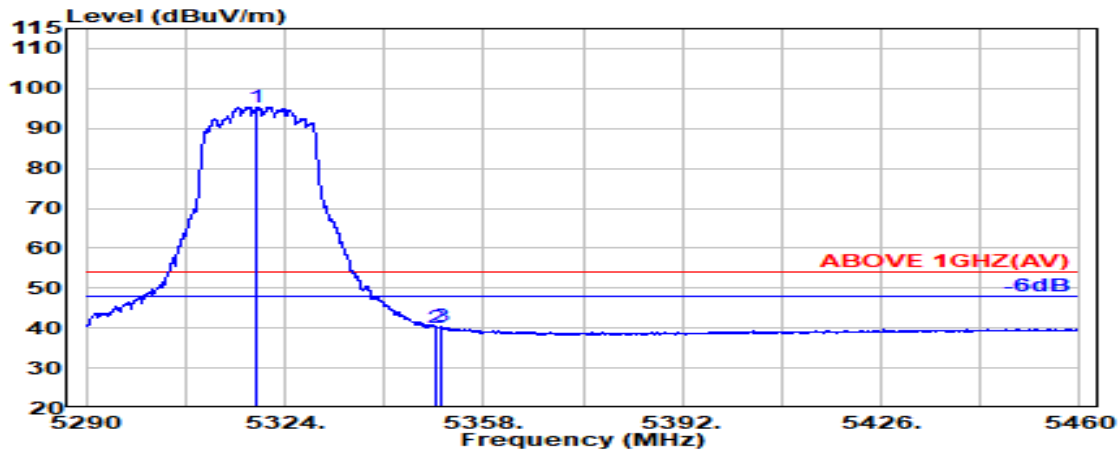


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.289	34.59	8.98	34.27	86.14	95.44	---	---	Average
5350.000	34.90	9.00	34.26	30.33	39.97	54.00	14.03	Average
5350.617	34.90	9.00	34.26	30.71	40.35	54.00	13.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

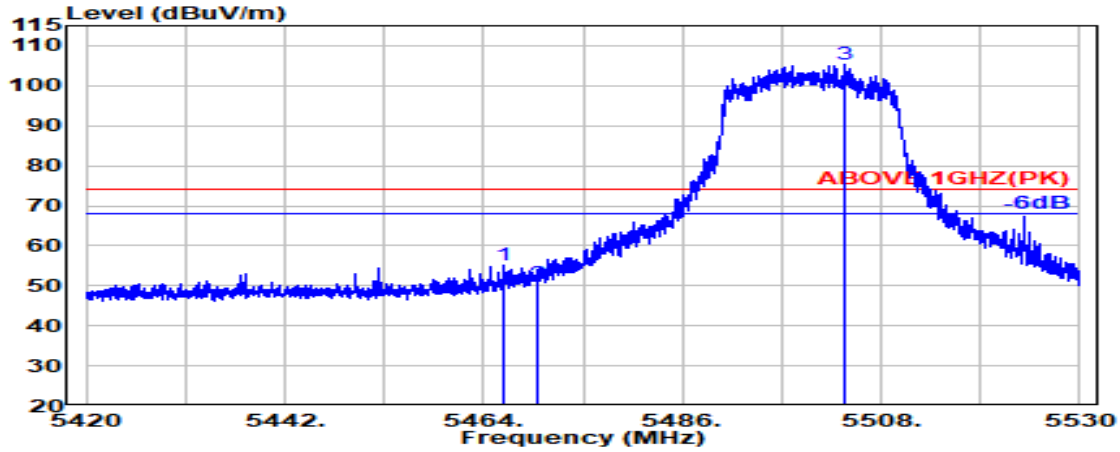

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.168	34.63	9.06	34.21	45.71	55.19	74.00	18.81	Peak
5470.000	34.64	9.06	34.21	41.11	50.60	74.00	23.40	Peak
@ 5503.883	34.70	9.08	34.20	95.87	105.45	---	---	Peak

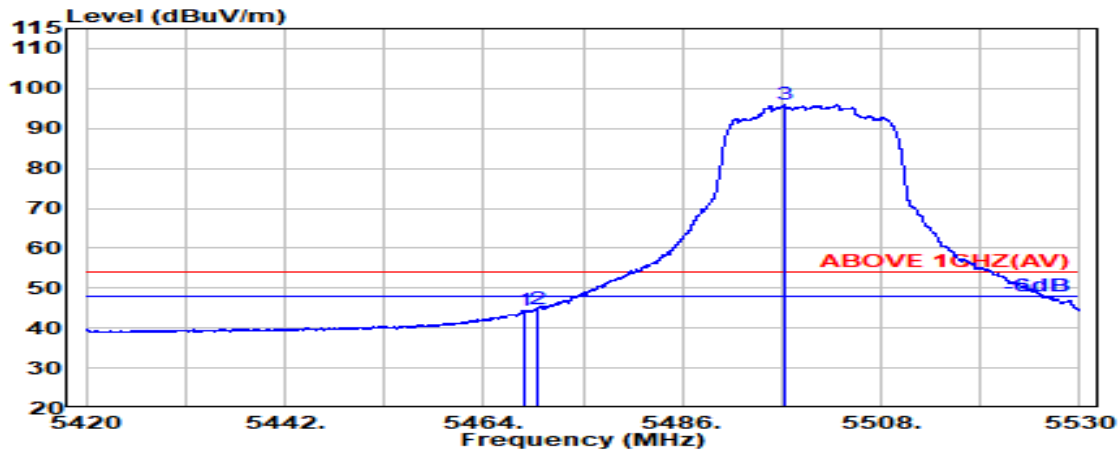


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.64	9.06	34.21	34.89	44.37	54.00	9.63	Average
5470.000	34.64	9.06	34.21	35.38	44.87	54.00	9.13	Average
@ 5497.314	34.69	9.08	34.20	86.38	95.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

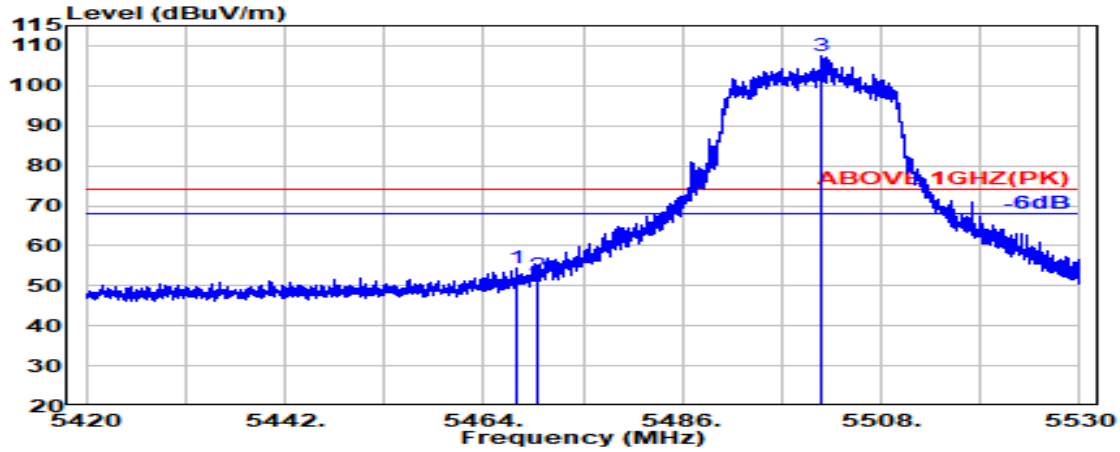

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.614	34.64	9.06	34.21	45.01	54.49	74.00	19.51	Peak
5470.000	34.64	9.06	34.21	43.13	52.62	74.00	21.38	Peak
@ 5501.494	34.70	9.08	34.20	97.97	107.55	---	---	Peak

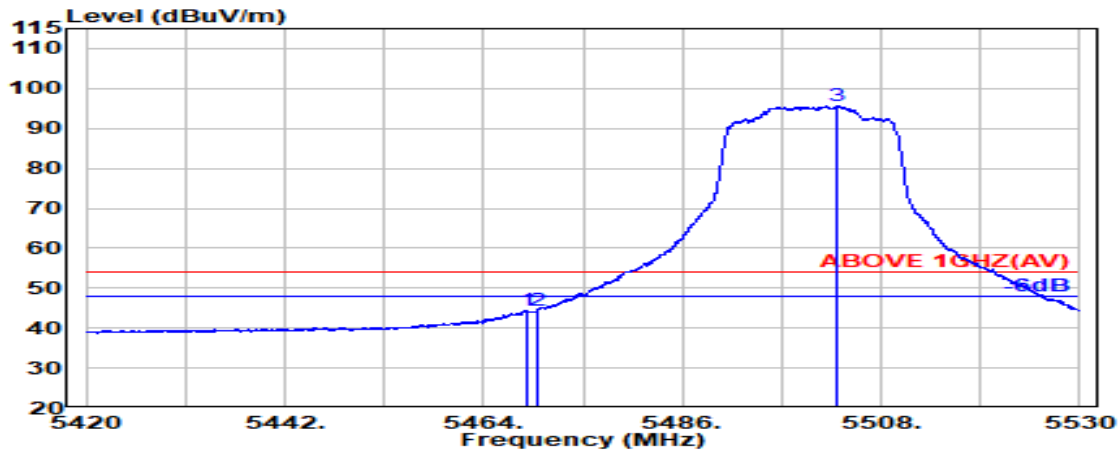


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.683	34.64	9.06	34.21	34.87	44.36	54.00	9.64	Average
5470.000	34.64	9.06	34.21	34.87	44.36	54.00	9.64	Average
@ 5503.191	34.70	9.08	34.20	86.16	95.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

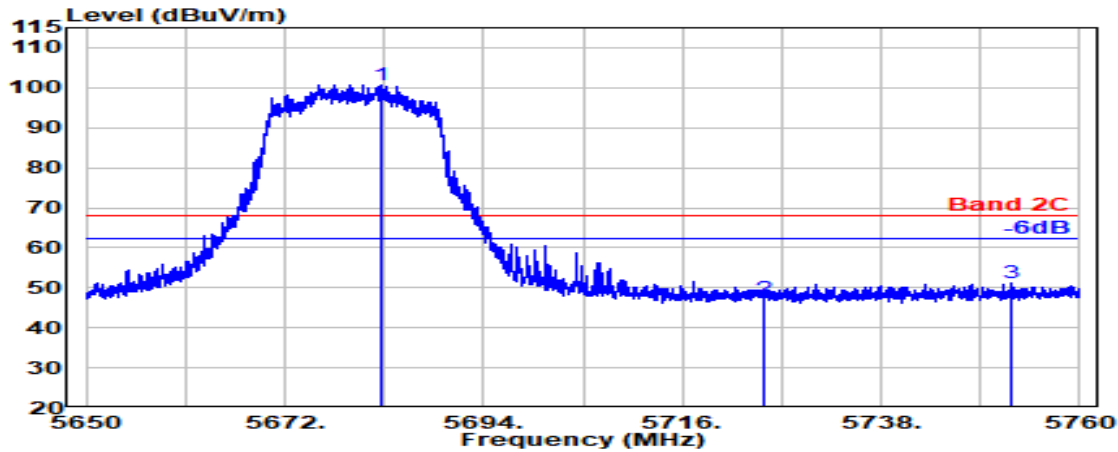

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.560	34.63	9.17	34.29	91.28	100.79	---	---	Peak
5725.000	34.85	9.19	34.31	37.62	47.36	68.20	20.84	Peak
5752.520	35.01	9.21	34.32	41.30	51.20	68.20	17.00	Peak

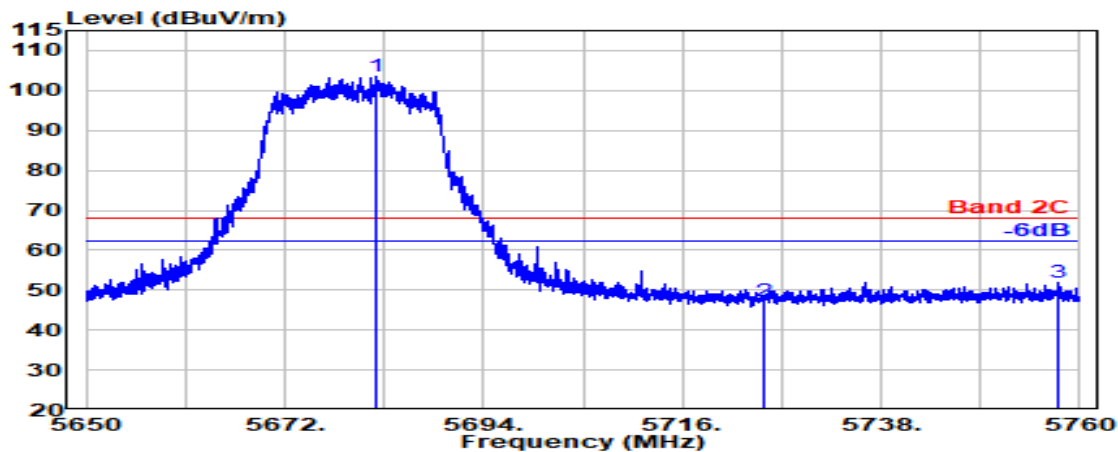


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.026	34.63	9.17	34.29	94.11	103.62	---	---	Peak
5725.000	34.85	9.19	34.31	37.41	47.14	68.20	21.06	Peak
5757.580	35.02	9.21	34.32	42.05	51.95	68.20	16.25	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

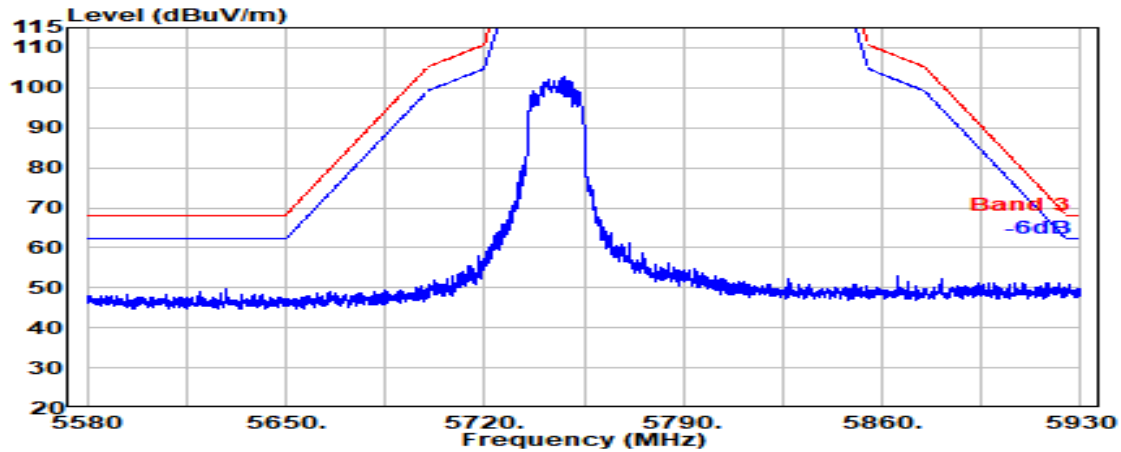


Antenna at Vertical Polarization

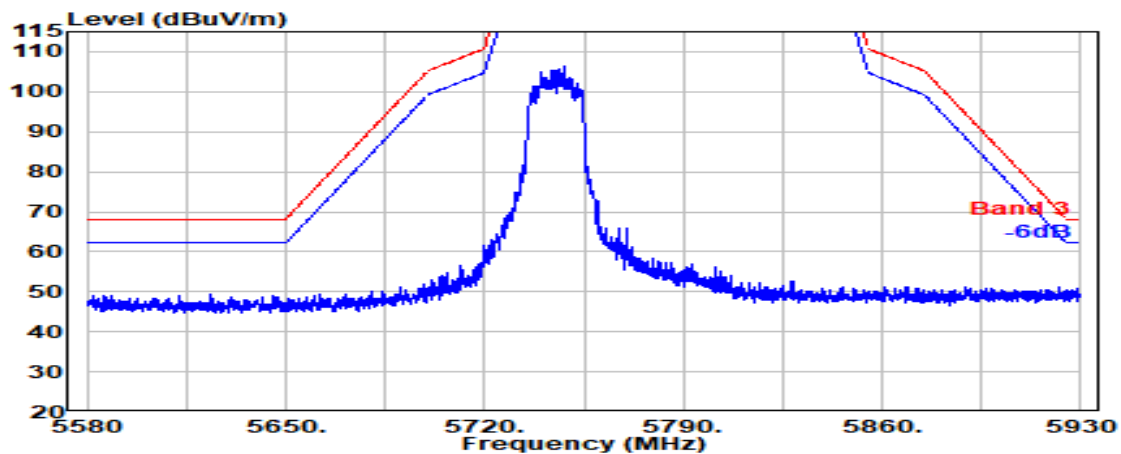


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

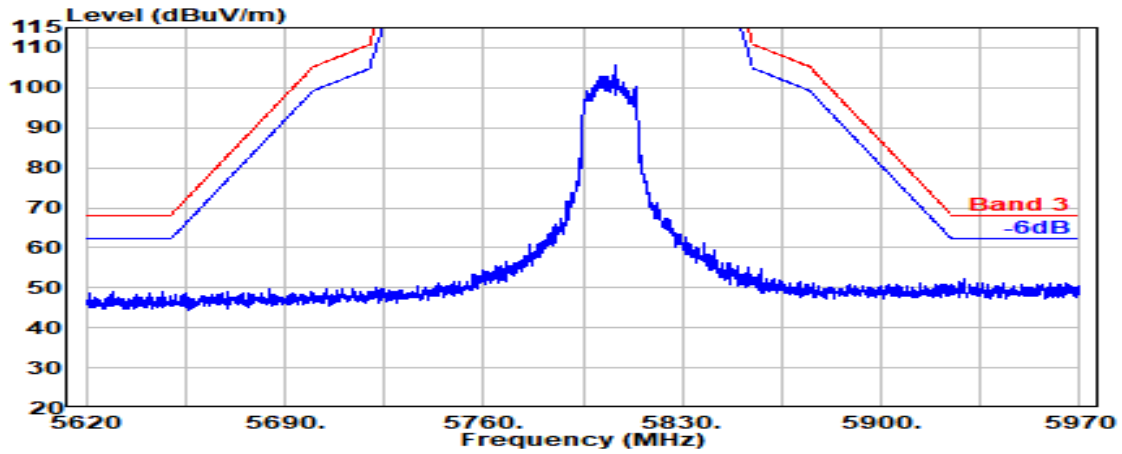

Antenna at Vertical Polarization

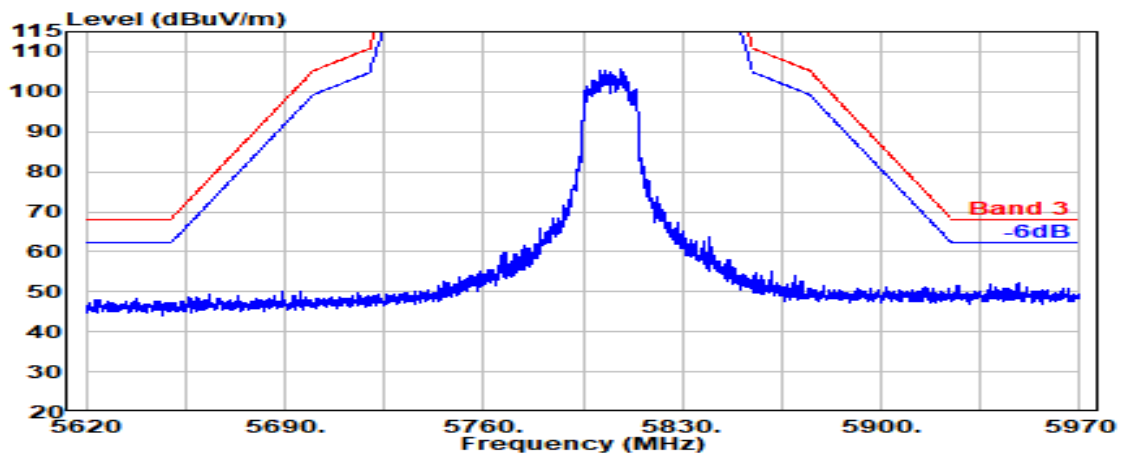


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

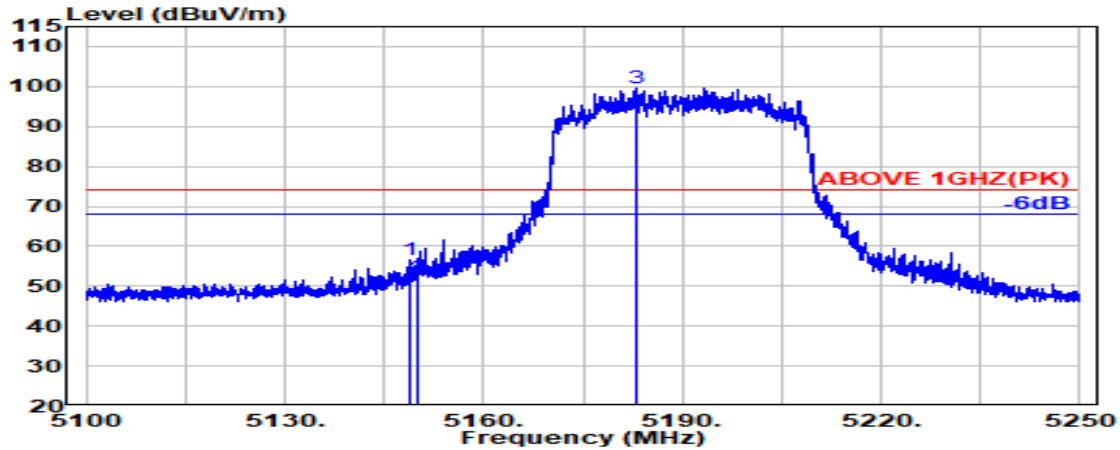

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.857	34.49	8.89	34.34	47.55	56.59	74.00	17.41	Peak
5150.000	34.50	8.89	34.34	42.86	51.90	74.00	22.10	Peak
@ 5182.886	34.63	8.90	34.32	90.35	99.57	---	---	Peak

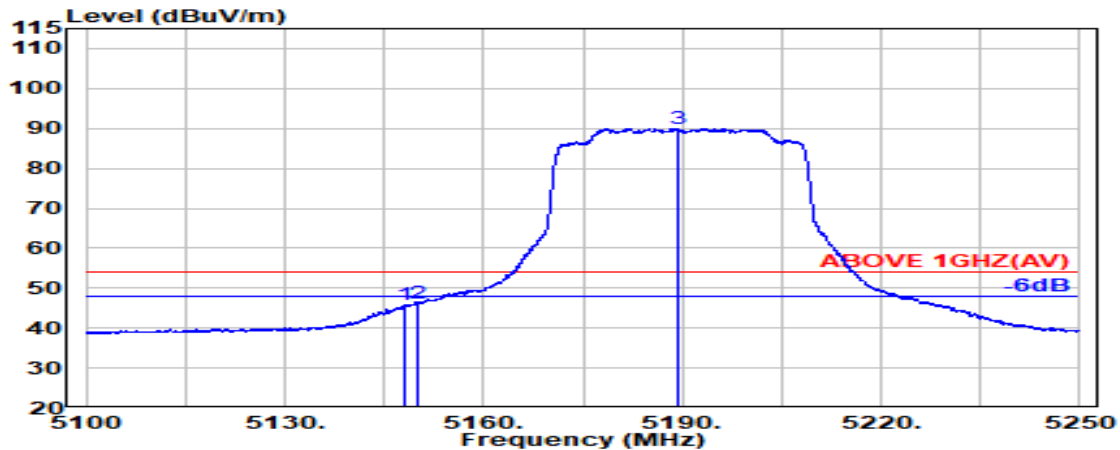


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.257	34.49	8.88	34.34	36.95	45.99	54.00	8.01	Average
5150.000	34.50	8.89	34.34	37.09	46.14	54.00	7.86	Average
@ 5189.229	34.66	8.91	34.32	80.74	89.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

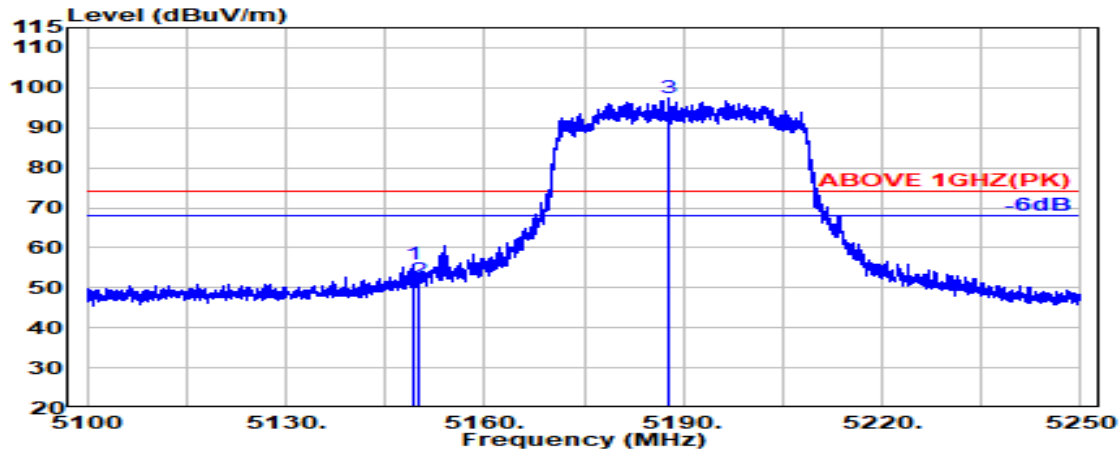

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.157	34.49	8.89	34.34	46.68	55.72	74.00	18.28	Peak
5150.000	34.50	8.89	34.34	43.01	52.06	74.00	21.94	Peak
@ 5187.814	34.65	8.91	34.32	88.29	97.52	---	---	Peak

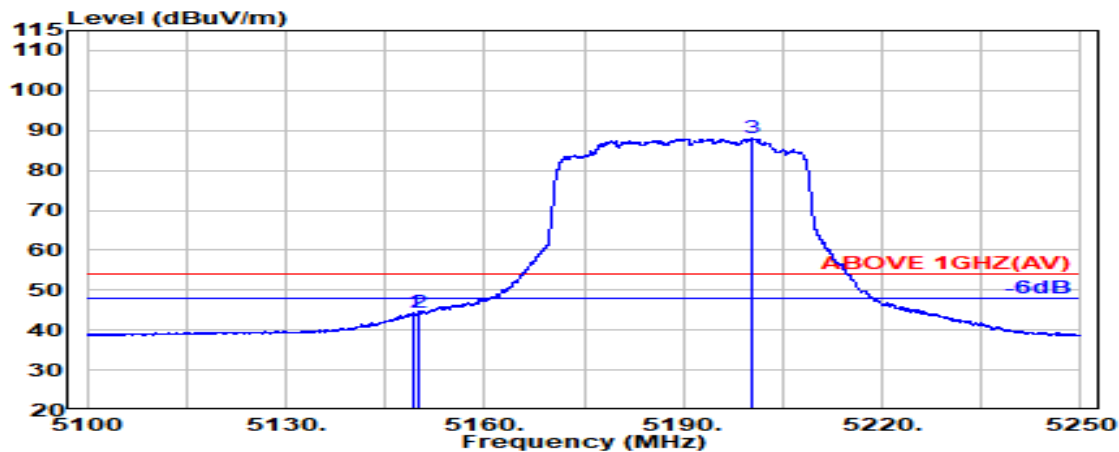


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.372	34.50	8.89	34.34	35.24	44.28	54.00	9.72	Average
5150.000	34.50	8.89	34.34	35.49	44.53	54.00	9.47	Average
@ 5200.329	34.70	8.91	34.32	78.67	87.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

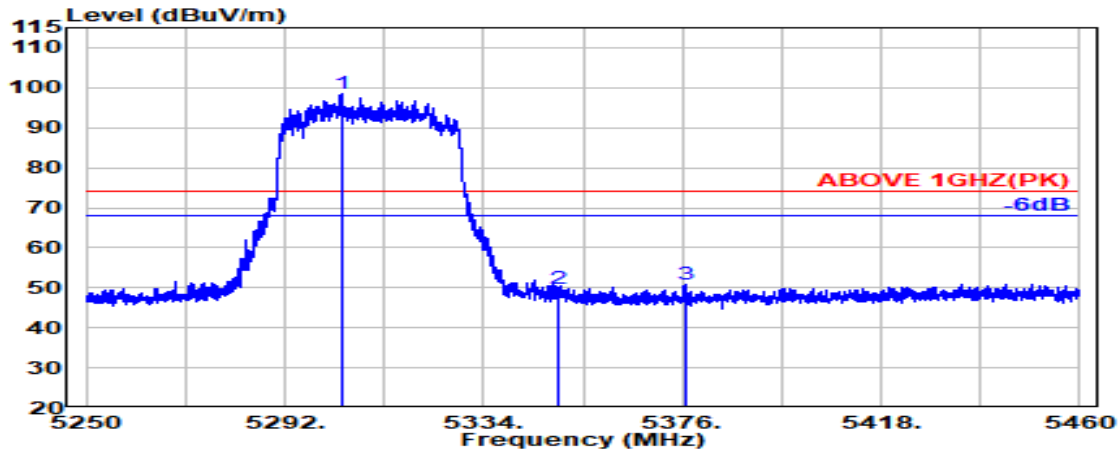

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.880	34.44	8.97	34.28	89.26	98.40	---	---	Peak
5350.000	34.90	9.00	34.26	39.98	49.62	74.00	24.38	Peak
5376.480	34.85	9.01	34.25	41.38	50.99	74.00	23.01	Peak

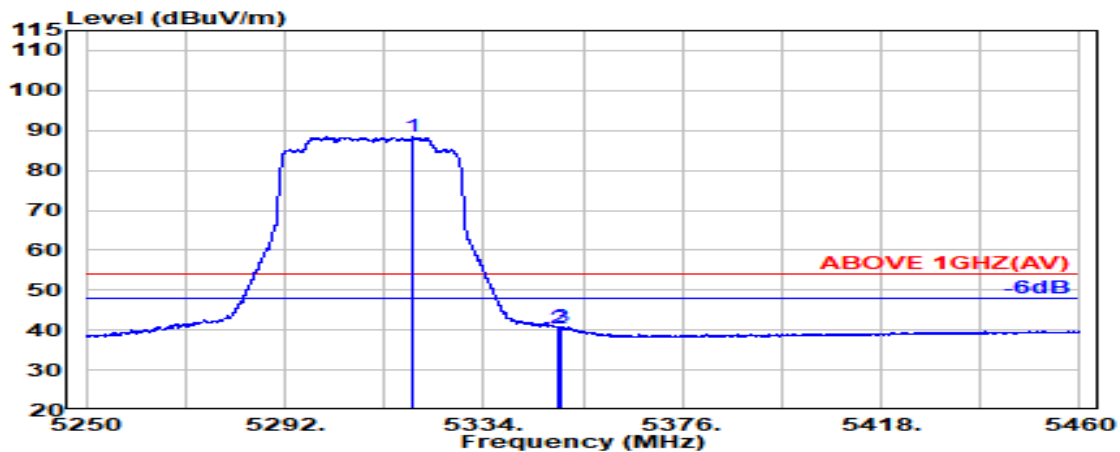


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.180	34.59	8.98	34.27	79.21	88.51	---	---	Average
5350.000	34.90	9.00	34.26	30.79	40.43	54.00	13.57	Average
5350.560	34.90	9.00	34.26	31.04	40.68	54.00	13.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

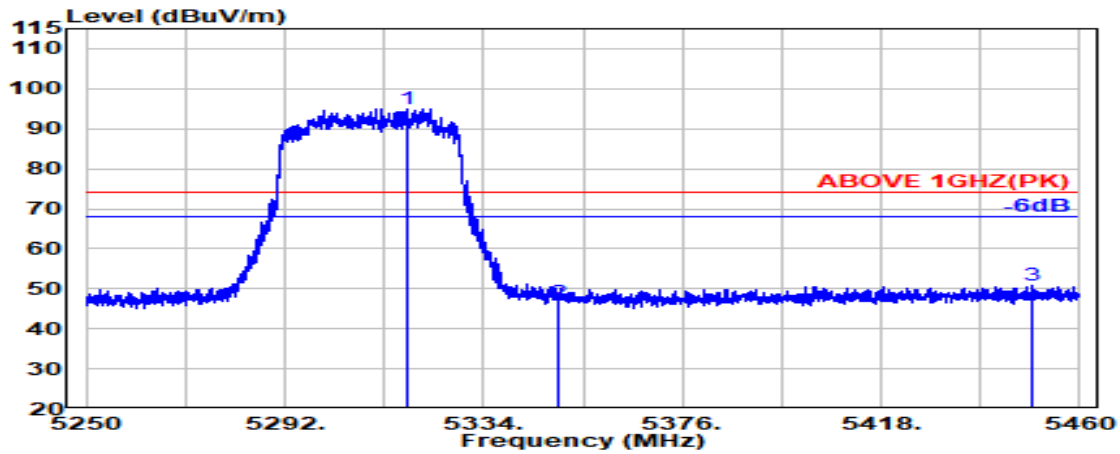

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.740	34.58	8.98	34.27	85.73	95.02	---	---	Peak
5350.000	34.90	9.00	34.26	36.94	46.58	74.00	27.42	Peak
5449.800	34.60	9.05	34.22	41.44	50.88	74.00	23.12	Peak

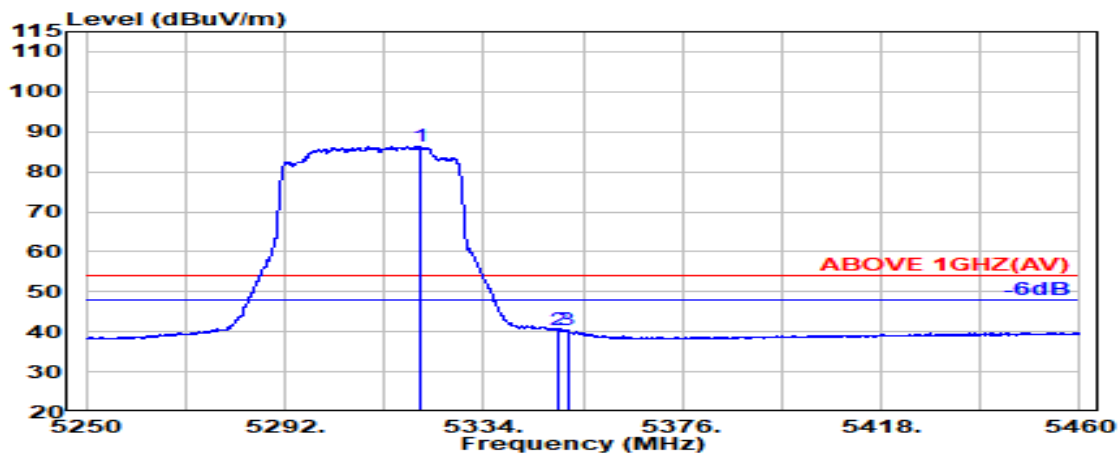


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.560	34.61	8.98	34.27	77.05	86.37	---	---	Average
5350.000	34.90	9.00	34.26	30.96	40.60	54.00	13.40	Average
5351.700	34.90	9.00	34.26	30.87	40.51	54.00	13.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

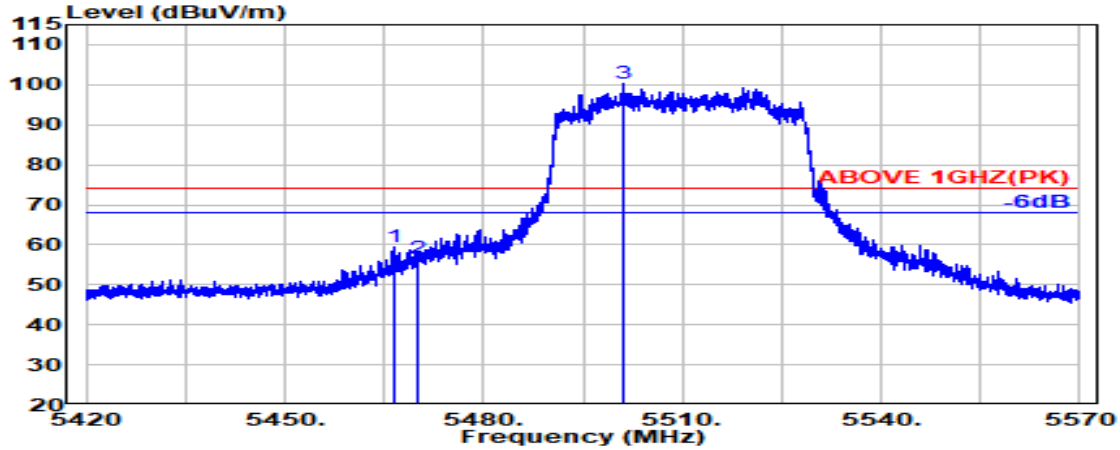

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.457	34.63	9.06	34.21	50.07	59.55	74.00	14.45	Peak
5470.000	34.64	9.06	34.21	46.93	56.42	74.00	17.58	Peak
@ 5500.957	34.70	9.08	34.20	90.64	100.22	---	---	Peak

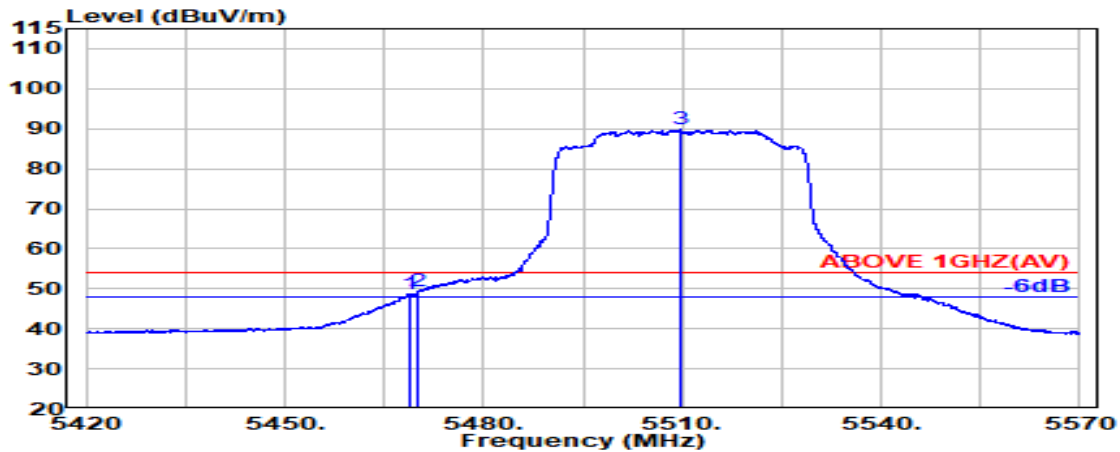


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.729	34.64	9.06	34.21	39.28	48.76	54.00	5.24	Average
5470.000	34.64	9.06	34.21	39.73	49.22	54.00	4.78	Average
@ 5509.614	34.70	9.08	34.20	80.16	89.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

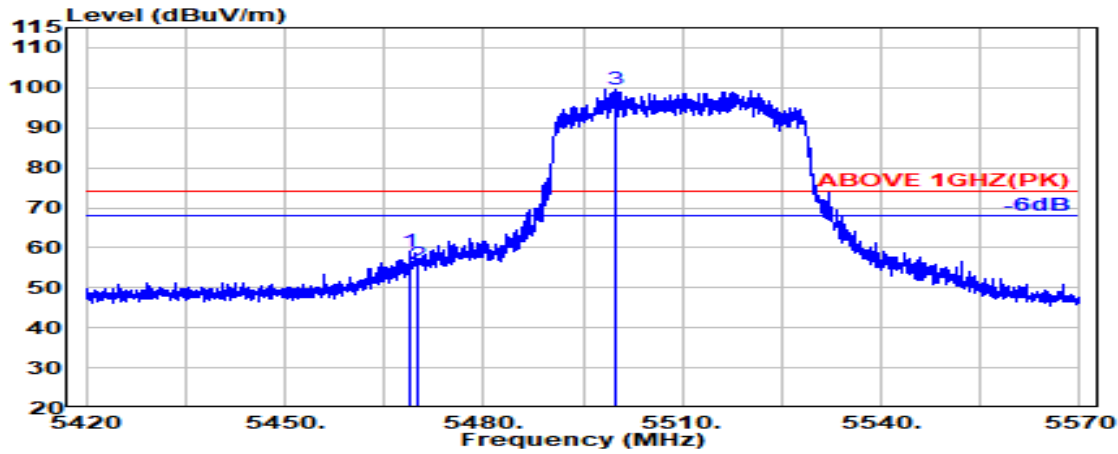

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.986	34.64	9.06	34.21	49.67	59.16	74.00	14.84	Peak
5470.000	34.64	9.06	34.21	46.39	55.88	74.00	18.12	Peak
@ 5500.014	34.70	9.08	34.20	90.08	99.66	---	---	Peak

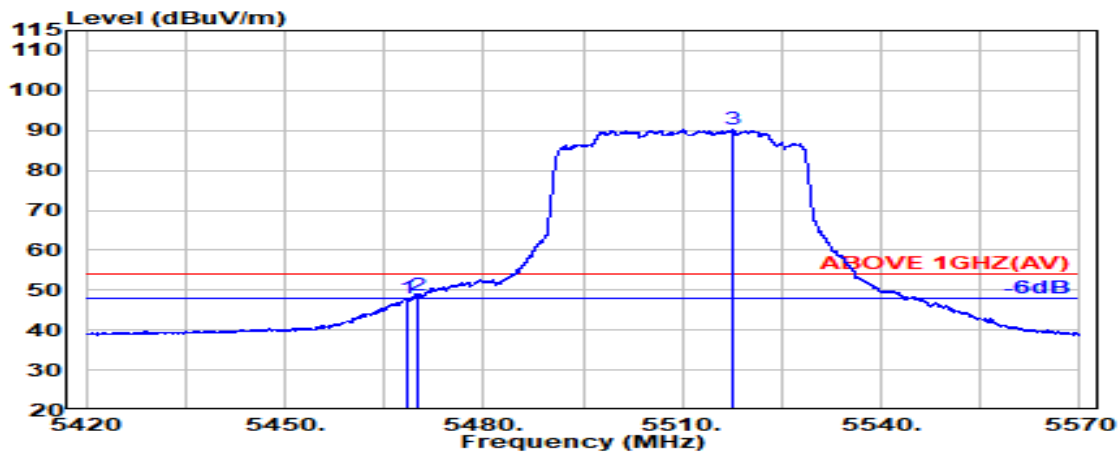


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.514	34.64	9.06	34.21	38.49	47.97	54.00	6.03	Average
5470.000	34.64	9.06	34.21	39.35	48.84	54.00	5.16	Average
@ 5517.543	34.70	9.09	34.21	80.55	90.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

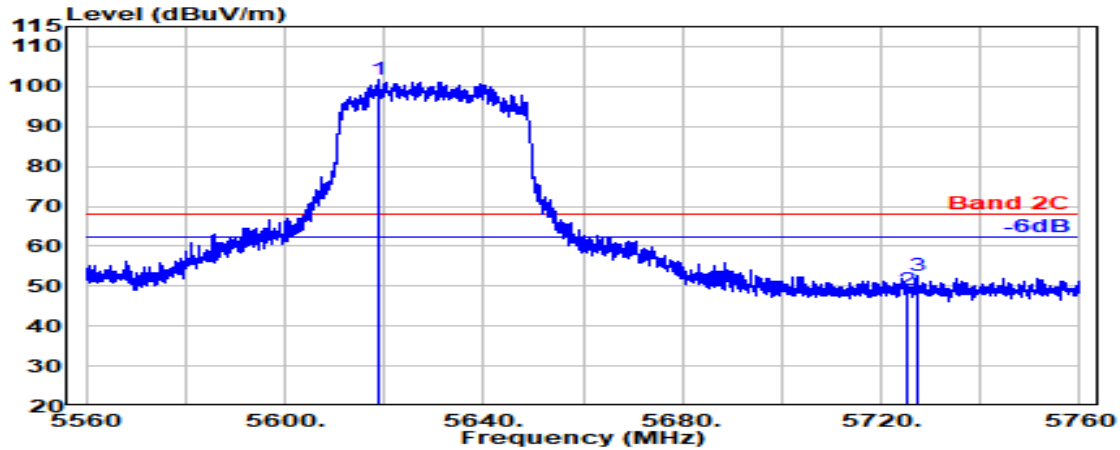

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5618.857	34.44	9.14	34.26	92.43	101.75	---	---	Peak
5725.000	34.85	9.19	34.31	39.27	49.01	68.20	19.19	Peak
5727.372	34.86	9.19	34.31	42.71	52.46	68.20	15.74	Peak

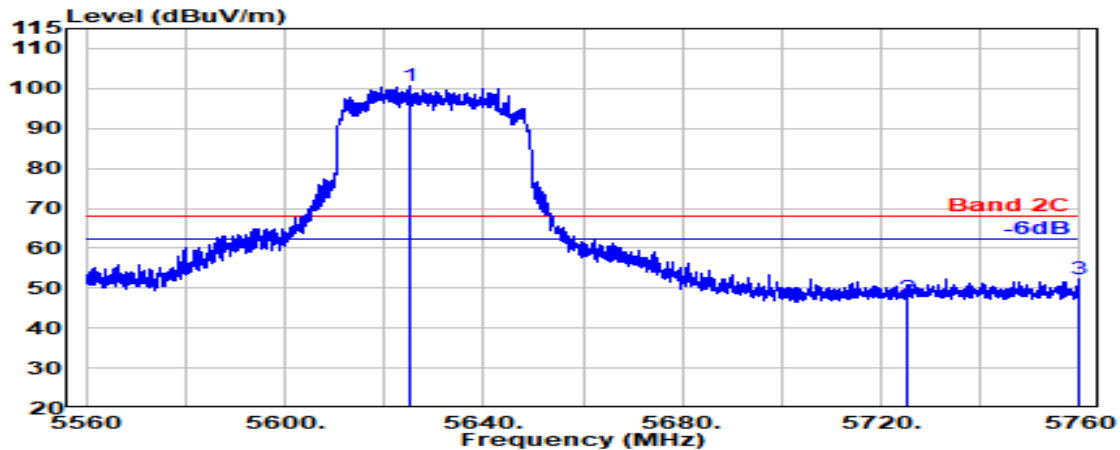


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5625.029	34.45	9.14	34.26	91.40	100.74	---	---	Peak
5725.000	34.85	9.19	34.31	37.71	47.45	68.20	20.75	Peak
5759.600	35.02	9.21	34.32	42.43	52.34	68.20	15.86	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

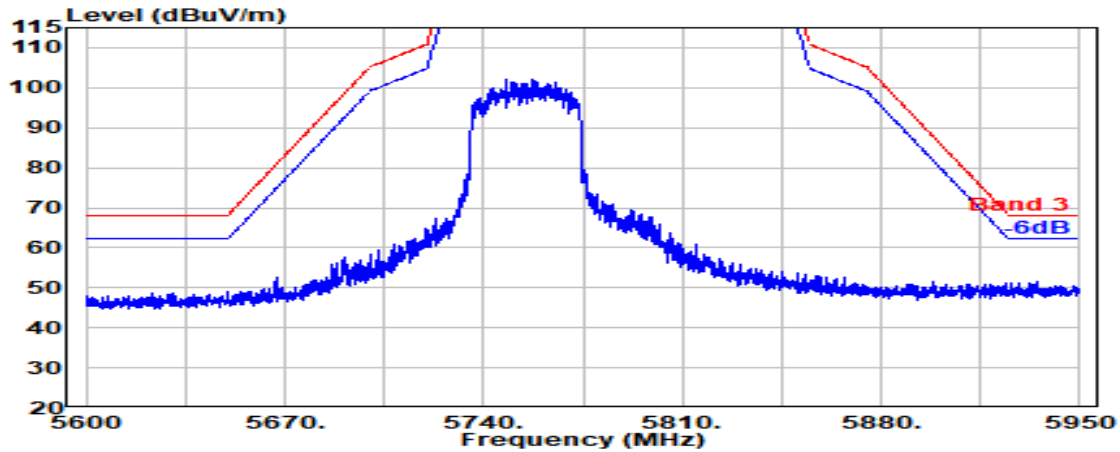


Antenna at Vertical Polarization

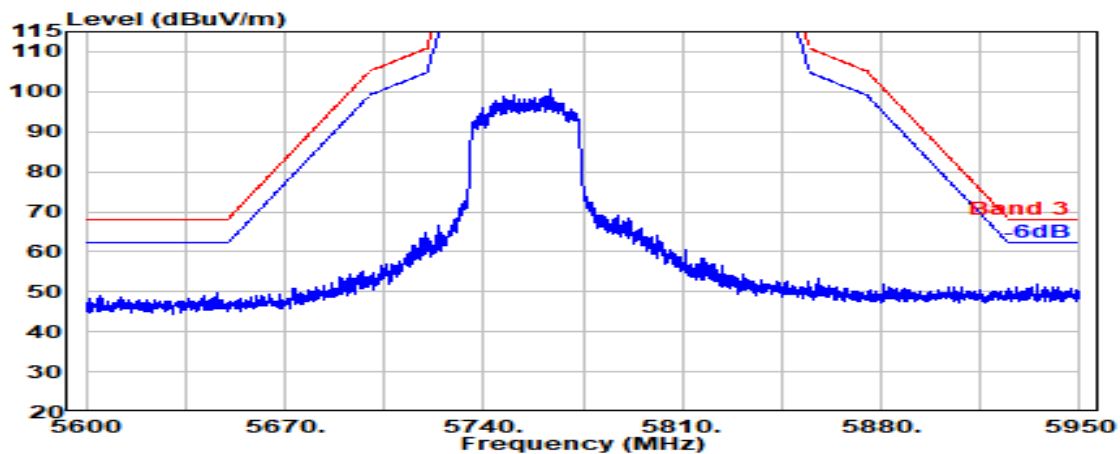


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

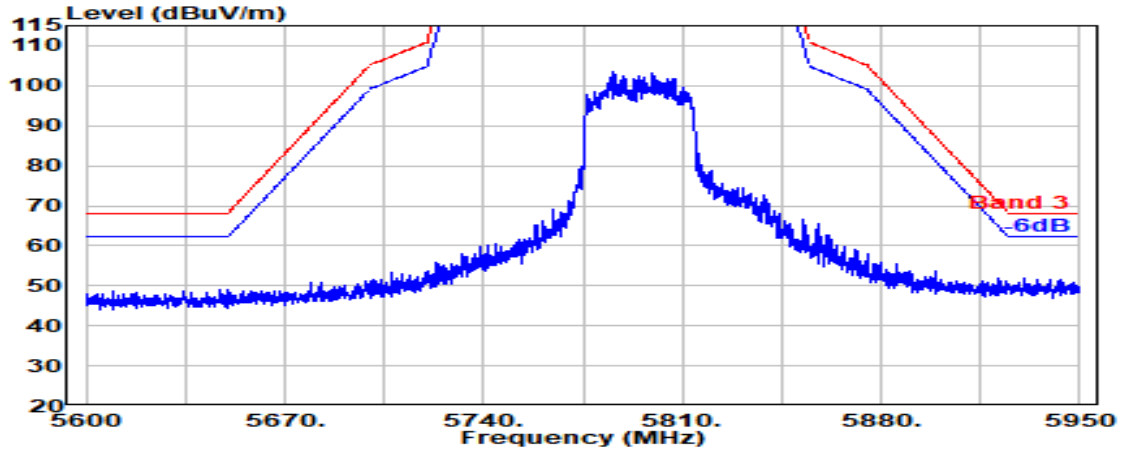

Antenna at Vertical Polarization

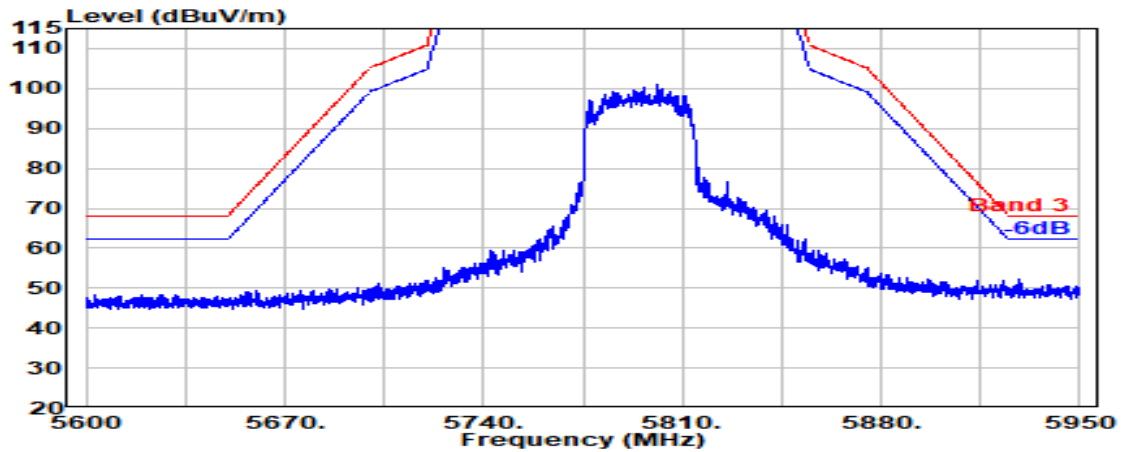


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

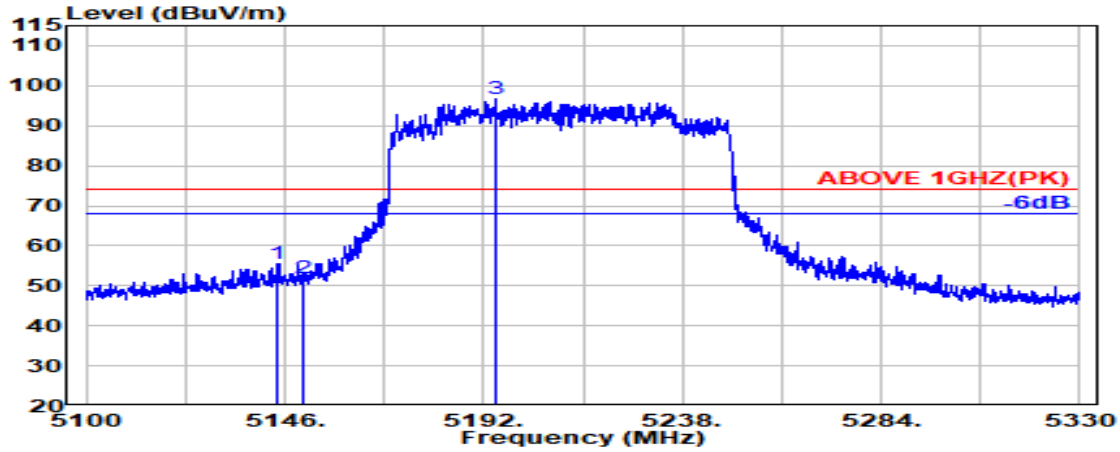

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.500	34.47	8.88	34.34	46.63	55.64	74.00	18.36	Peak
5150.000	34.50	8.89	34.34	43.03	52.08	74.00	21.92	Peak
@ 5194.900	34.68	8.91	34.32	87.37	96.64	---	---	Peak

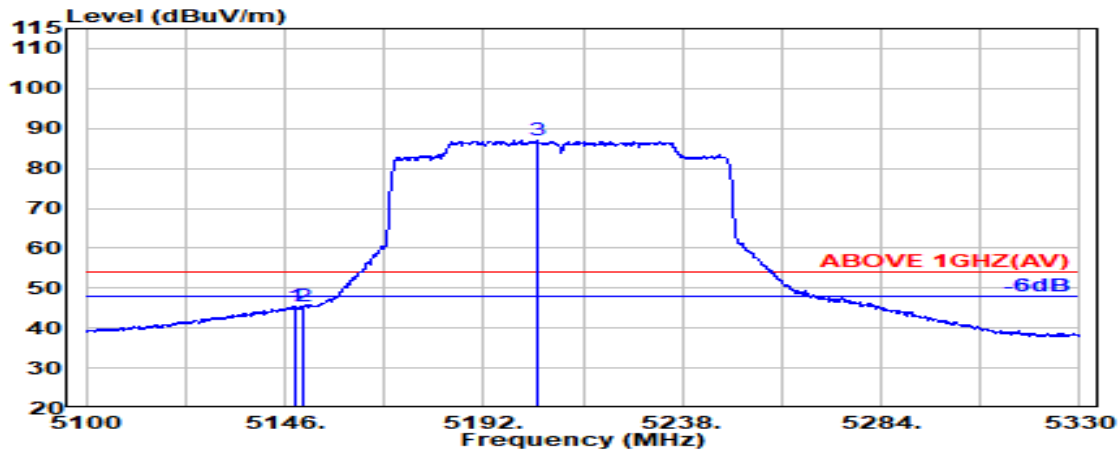


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	34.49	8.89	34.34	36.43	45.46	54.00	8.54	Average
5150.000	34.50	8.89	34.34	36.23	45.28	54.00	8.72	Average
@ 5204.400	34.68	8.92	34.32	77.63	86.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

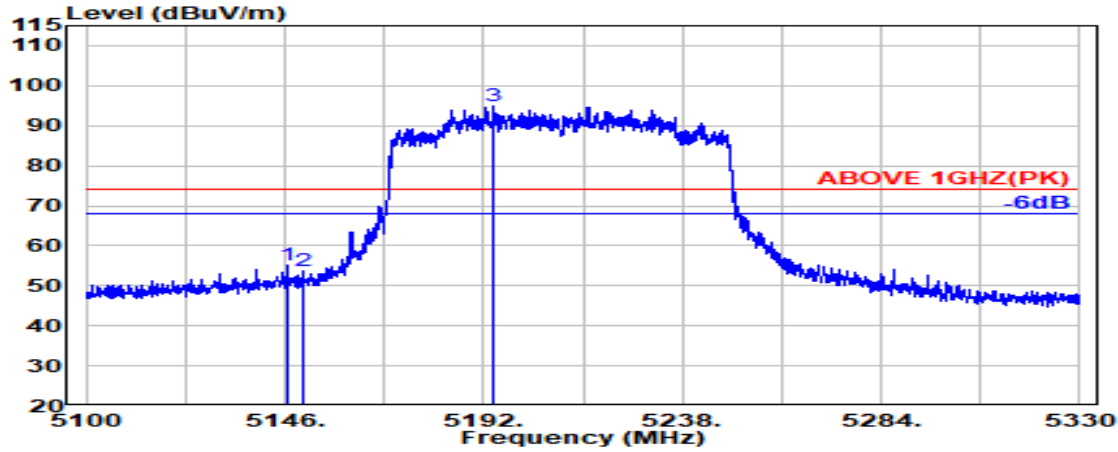

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	34.48	8.88	34.34	46.13	55.15	74.00	18.85	Peak
5150.000	34.50	8.89	34.34	44.74	53.79	74.00	20.21	Peak
@ 5194.500	34.68	8.91	34.32	85.62	94.89	---	---	Peak

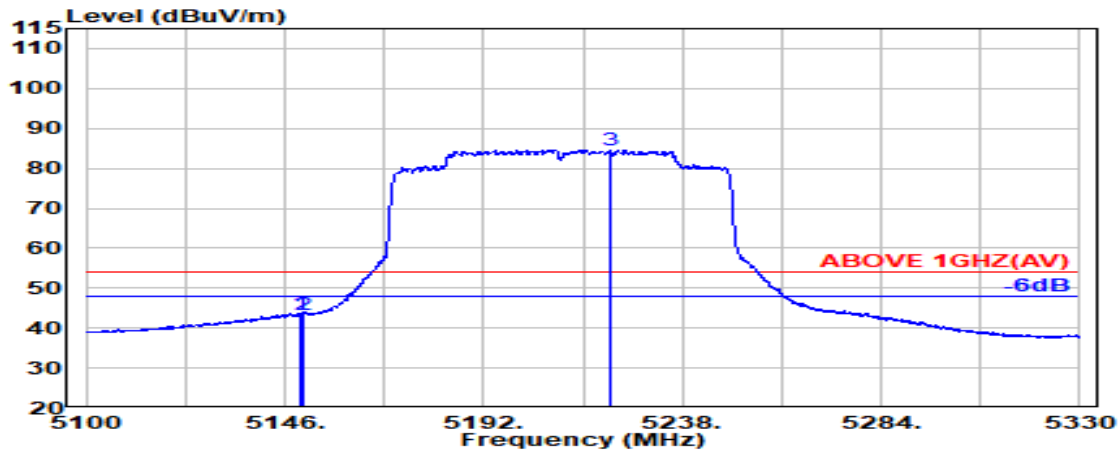


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.50	8.89	34.34	34.58	43.62	54.00	10.38	Average
5150.000	34.50	8.89	34.34	34.20	43.24	54.00	10.76	Average
@ 5221.200	34.61	8.93	34.31	75.44	84.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

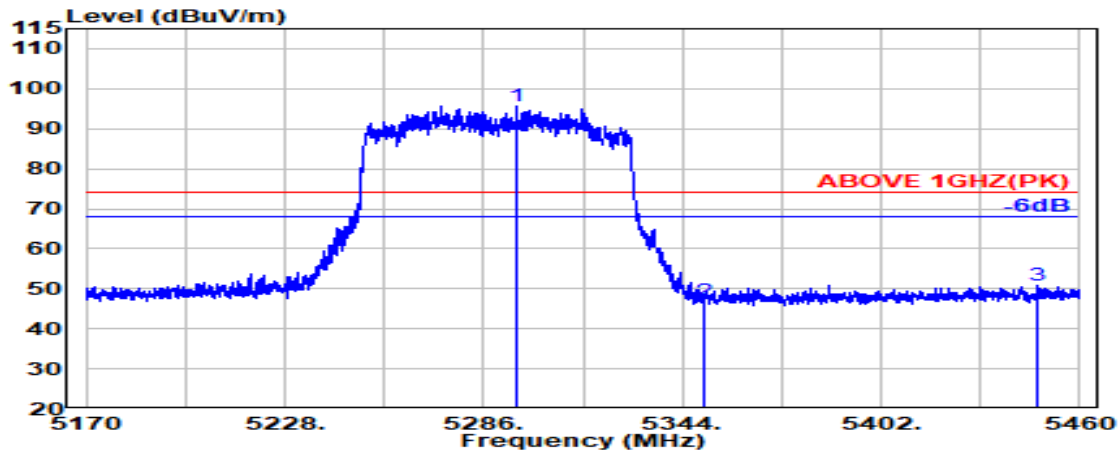

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5295.900	34.41	8.97	34.28	86.71	95.80	---	---	Peak
5350.000	34.90	9.00	34.26	37.08	46.71	74.00	27.29	Peak
5447.400	34.61	9.05	34.22	41.30	50.74	74.00	23.26	Peak

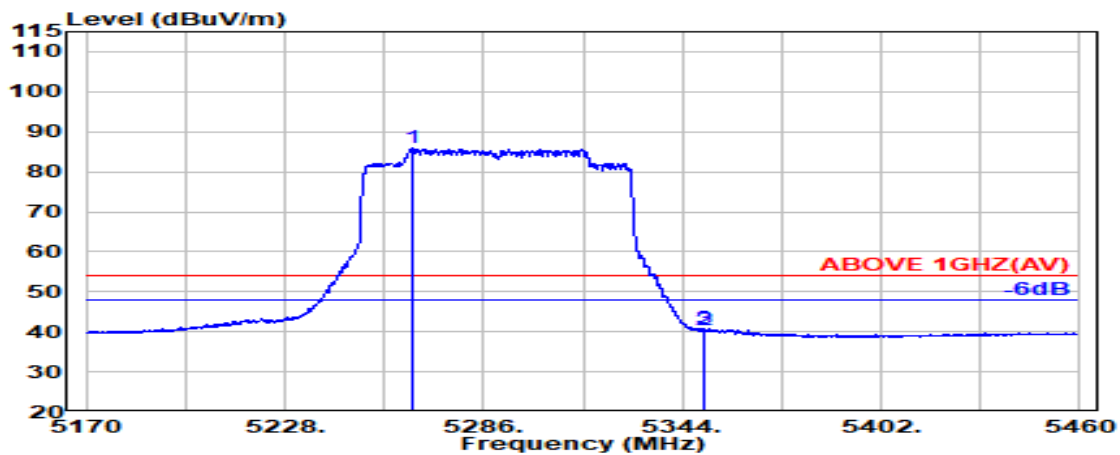


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.200	34.47	8.95	34.29	76.75	85.88	---	---	Average
5350.000	34.90	9.00	34.26	30.87	40.51	54.00	13.49	Average
5350.300	34.90	9.00	34.26	31.16	40.80	54.00	13.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

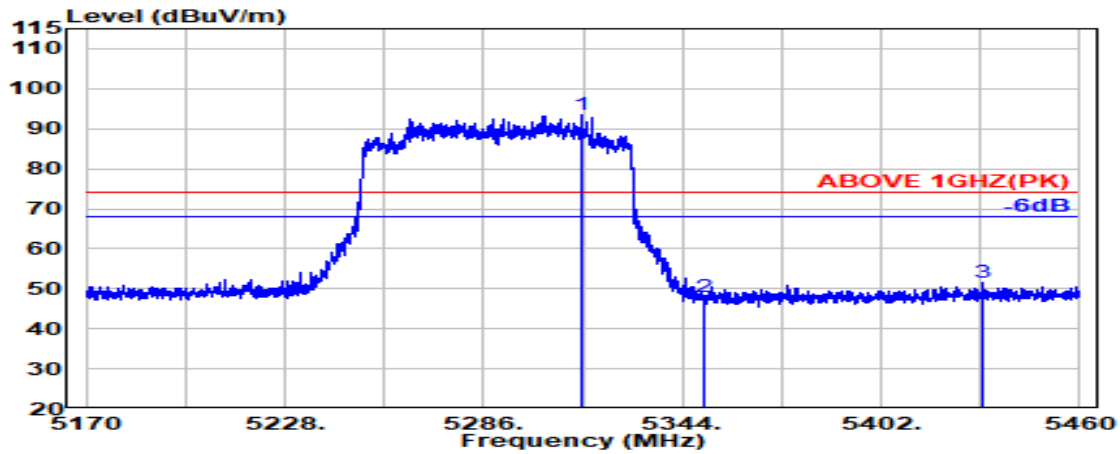

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.700	34.55	8.98	34.27	84.19	93.44	---	---	Peak
5350.000	34.90	9.00	34.26	38.43	48.07	74.00	25.93	Peak
5431.700	34.67	9.04	34.23	42.10	51.59	74.00	22.41	Peak

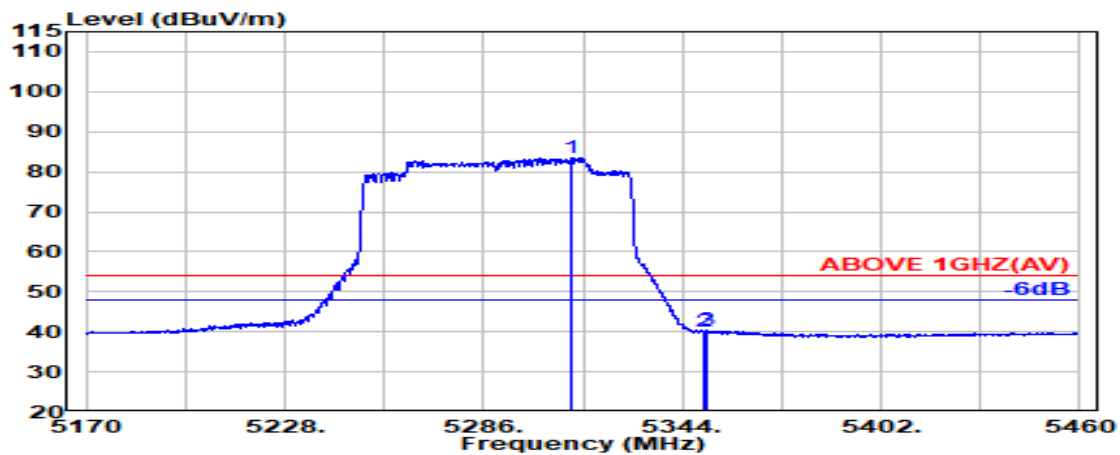


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.900	34.52	8.98	34.27	74.30	83.52	---	---	Average
5350.000	34.90	9.00	34.26	30.44	40.08	54.00	13.92	Average
5351.100	34.90	9.00	34.26	30.74	40.38	54.00	13.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

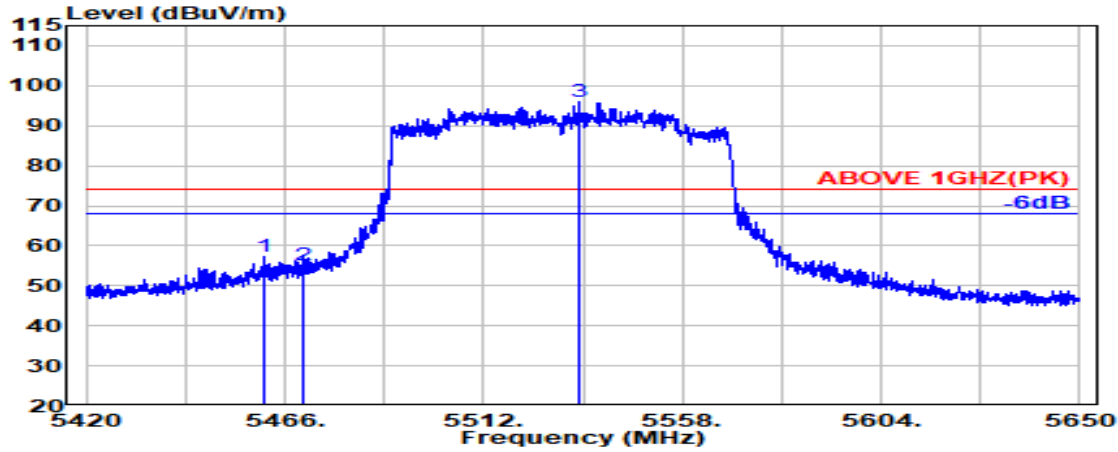

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.000	34.62	9.06	34.21	47.72	57.18	74.00	16.82	Peak
5470.000	34.64	9.06	34.21	45.46	54.95	74.00	19.05	Peak
@ 5534.100	34.70	9.10	34.22	86.52	96.10	---	---	Peak

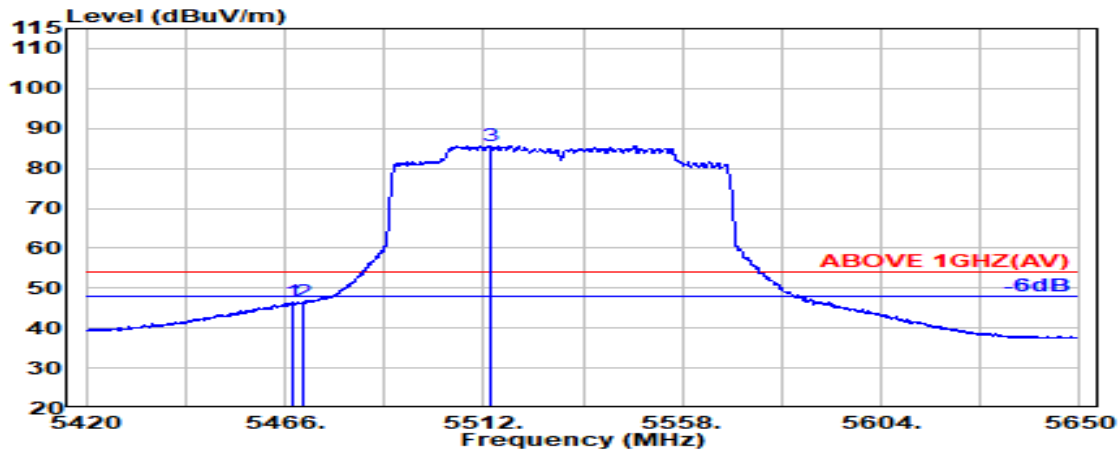


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.64	9.06	34.21	36.93	46.41	54.00	7.59	Average
5470.000	34.64	9.06	34.21	36.86	46.35	54.00	7.65	Average
@ 5513.400	34.70	9.08	34.21	75.98	85.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

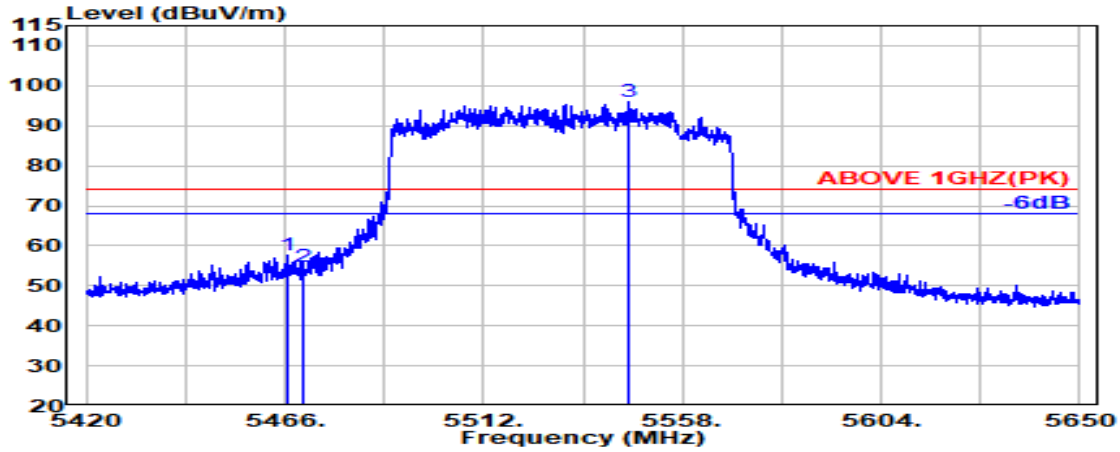

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.400	34.63	9.06	34.21	48.28	57.76	74.00	16.24	Peak
5470.000	34.64	9.06	34.21	45.45	54.94	74.00	19.06	Peak
@ 5545.500	34.70	9.10	34.22	86.44	96.02	---	---	Peak

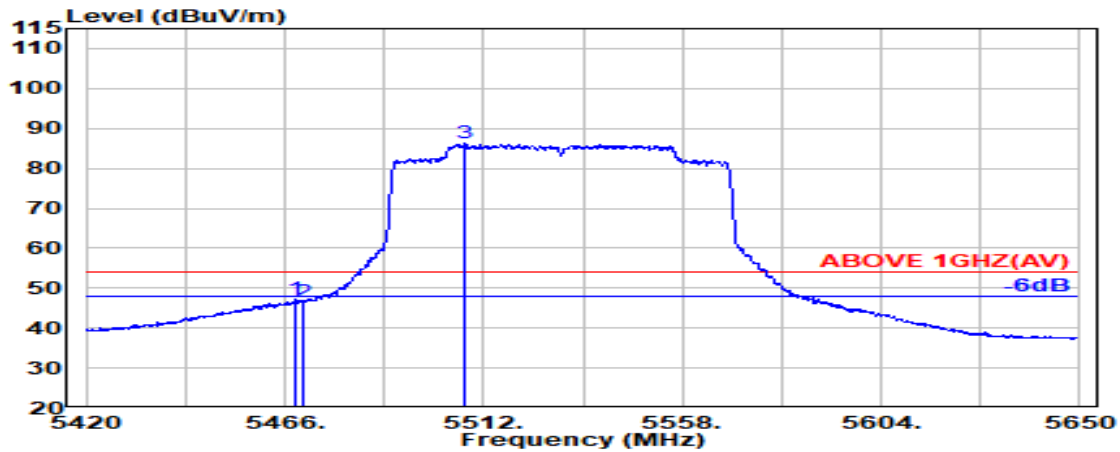


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.500	34.64	9.06	34.21	37.88	47.37	54.00	6.63	Average
5470.000	34.64	9.06	34.21	37.19	46.68	54.00	7.32	Average
@ 5507.600	34.70	9.08	34.20	76.62	86.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

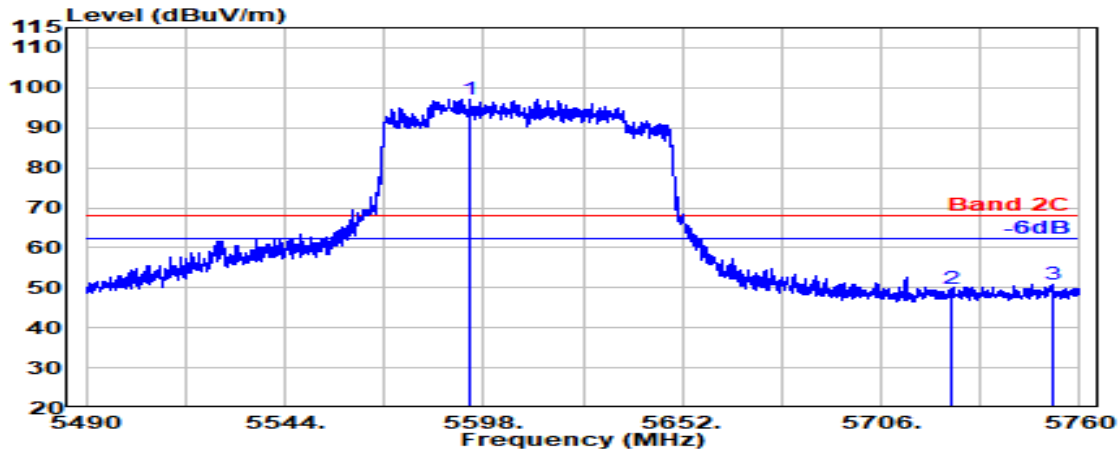

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5594.300	34.43	9.13	34.24	87.90	97.21	---	---	Peak
5725.000	34.85	9.19	34.31	40.06	49.80	68.20	18.40	Peak
5752.500	35.01	9.21	34.32	41.02	50.92	68.20	17.28	Peak

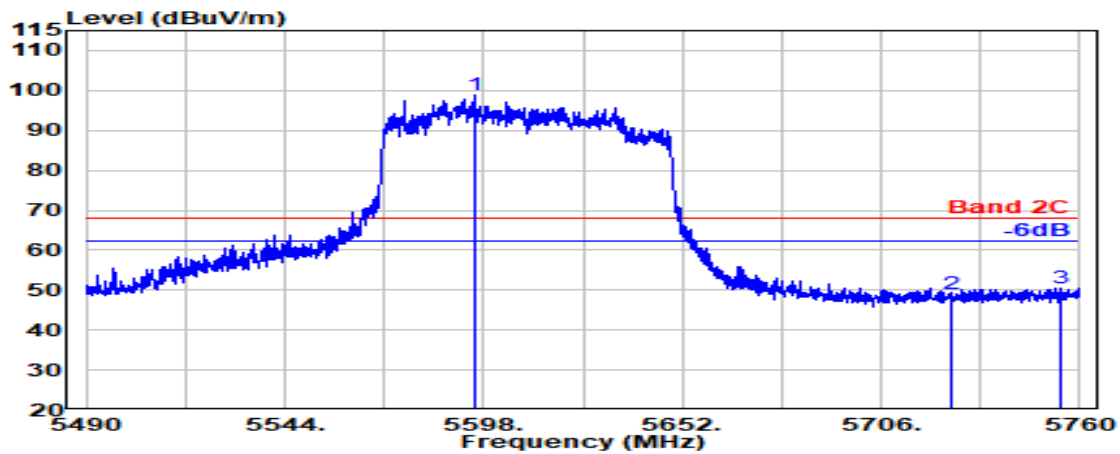

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.400	34.43	9.13	34.25	89.71	99.02	---	---	Peak
5725.000	34.85	9.19	34.31	39.13	48.87	68.20	19.33	Peak
5755.000	35.01	9.21	34.32	40.74	50.64	68.20	17.56	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	12.65	34.73	31.53	47.05	54.00	6.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	12.65	34.73	31.33	46.85	54.00	7.15	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	12.80	34.61	32.01	48.09	54.00	5.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	12.80	34.61	31.70	47.78	54.00	6.22	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.16	13.26	34.51	31.10	48.01	54.00	5.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.16	13.26	34.51	31.19	48.11	54.00	5.89	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	31.51	48.94	54.00	5.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	30.45	47.88	54.00	6.12	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.43	13.70	34.54	29.96	47.55	54.00	6.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.43	13.70	34.54	30.54	48.13	54.00	5.87	Peak

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.76	12.71	34.66	31.67	47.48	54.00	6.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.76	12.71	34.66	33.31	49.12	54.00	4.88	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	12.80	34.61	32.60	48.69	54.00	5.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	12.80	34.61	32.54	48.63	54.00	5.37	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.16	13.26	34.51	30.39	47.31	54.00	6.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.16	13.26	34.51	32.35	49.26	54.00	4.74	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	30.98	48.40	54.00	5.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	32.58	50.00	54.00	4.00	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.43	13.70	34.54	30.57	48.17	54.00	5.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.43	13.70	34.54	30.45	48.04	54.00	5.96	Peak

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.72	12.69	34.68	32.17	47.91	54.00	6.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.72	12.69	34.68	31.59	47.33	54.00	6.67	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.84	12.75	34.63	32.74	48.71	54.00	5.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.84	12.75	34.63	31.37	47.33	54.00	6.67	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.10	13.20	34.51	30.78	47.56	54.00	6.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.10	13.20	34.51	32.57	49.35	54.00	4.65	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.34	13.54	34.52	31.68	49.04	54.00	4.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.34	13.54	34.52	31.91	49.27	54.00	4.73	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.41	13.72	34.54	30.41	48.00	54.00	6.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.41	13.72	34.54	29.27	46.86	54.00	7.14	Peak

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.64	12.66	34.71	32.25	47.84	54.00	6.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.64	12.66	34.71	31.67	47.26	54.00	6.74	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.88	12.78	34.62	31.83	47.87	54.00	6.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.88	12.78	34.62	31.65	47.69	54.00	6.31	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.22	13.33	34.51	31.65	48.69	54.00	5.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.22	13.33	34.51	31.26	48.29	54.00	5.71	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.30	13.50	34.52	31.90	49.18	54.00	4.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.30	13.50	34.52	31.06	48.34	54.00	5.66	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.45	13.68	34.53	31.61	49.21	54.00	4.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.45	13.68	34.53	30.21	47.80	54.00	6.20	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10500.000	37.80	12.72	34.64	32.20	48.08	54.00	5.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10500.000	37.80	12.72	34.64	32.25	48.13	54.00	5.87	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.000	38.14	13.24	34.51	31.55	48.42	54.00	5.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.000	38.14	13.24	34.51	30.47	47.34	54.00	6.66	Peak

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.76	12.71	34.66	32.40	48.22	54.00	5.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.76	12.71	34.66	33.58	49.39	54.00	4.61	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.82	12.74	34.63	31.18	47.10	54.00	6.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.82	12.74	34.63	32.90	48.82	54.00	5.18	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	13.09	34.51	30.92	47.60	54.00	6.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	13.09	34.51	31.06	47.74	54.00	6.26	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	30.88	48.30	54.00	5.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.38	13.56	34.52	30.61	48.03	54.00	5.97	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.45	13.78	34.56	30.98	48.65	54.00	5.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.45	13.78	34.56	30.26	47.93	54.00	6.07	Peak

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.72	12.69	34.68	32.08	47.82	54.00	6.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.72	12.69	34.68	31.86	47.60	54.00	6.40	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.84	12.75	34.63	30.60	46.56	54.00	7.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.84	12.75	34.63	34.66	50.62	54.00	3.38	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.10	13.20	34.51	32.03	48.82	54.00	5.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	38.10	13.20	34.51	31.38	48.17	54.00	5.83	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.34	13.54	34.52	31.65	49.01	54.00	4.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.34	13.54	34.52	31.38	48.75	54.00	5.25	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.41	13.72	34.54	30.54	48.13	54.00	5.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.41	13.72	34.54	30.53	48.12	54.00	5.88	Peak

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.64	12.66	34.71	32.37	47.96	54.00	6.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.64	12.66	34.71	31.03	46.62	54.00	7.38	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.88	12.78	34.62	31.21	47.26	54.00	6.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.88	12.78	34.62	32.29	48.33	54.00	5.67	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.22	13.33	34.51	31.40	48.43	54.00	5.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.22	13.33	34.51	30.64	47.67	54.00	6.33	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.30	13.50	34.52	30.24	47.52	54.00	6.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.30	13.50	34.52	30.15	47.44	54.00	6.56	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.45	13.68	34.53	31.03	48.62	54.00	5.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.45	13.68	34.53	31.93	49.52	54.00	4.48	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	12.72	34.64	32.69	48.57	54.00	5.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	12.72	34.64	32.13	48.01	54.00	5.99	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.14	13.24	34.51	30.73	47.60	54.00	6.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.14	13.24	34.51	30.70	47.57	54.00	6.43	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.