

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	92
A.2.3 Emissions in Non-restricted Frequency Bands:.....	95
A.3 6dB OCCUPIED BANDWIDTH	96
A.3.1 Emission Bandwidth Result.....	96
A.3.2 Measurement Plots	98
A.4 MAXIMUM PEAK OUTPUT POWER	105
A.4.1 Peak Output Power	105
A.4.2 Average Output Power (Reporting only).....	113
A.4.3 Measurement Plots	119
A.5 EMISSION LIMITATIONS	121
A.6 POWER SPECTRAL DENSITY	148
A.6.1 Power Spectral Density Result	148
A.6.2 Measurement Plots	150

A.1 CONDUCTED EMISSION

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

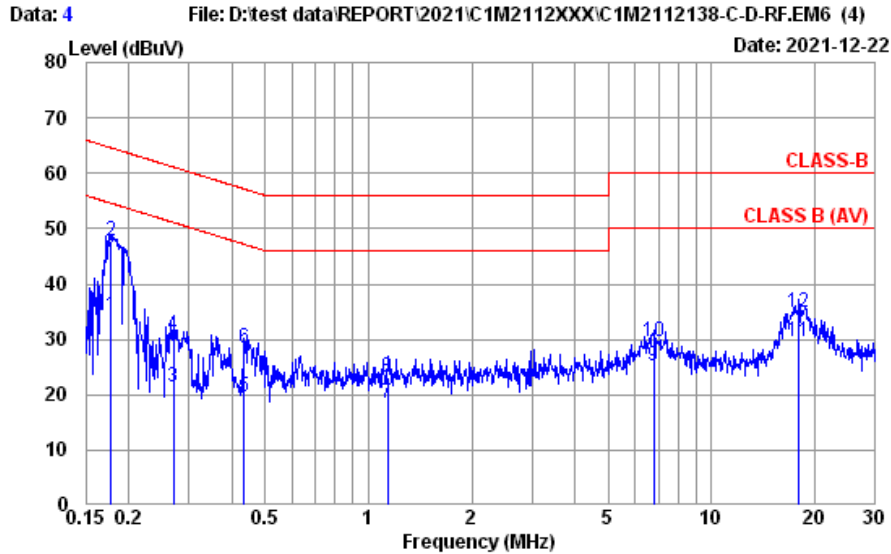


Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 16Z90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		
	INPAQ		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.178	10.40	0.03	9.85	13.97	34.25	54.59	20.34	Average
2	0.178	10.40	0.03	9.85	27.52	47.80	64.59	16.79	QP
3	0.270	10.38	0.03	9.85	1.09	21.35	51.12	29.77	Average
4	0.270	10.38	0.03	9.85	10.58	30.84	61.12	30.28	QP
5	0.433	10.37	0.03	9.85	-0.50	19.75	47.20	27.45	Average
6	0.433	10.37	0.03	9.85	8.23	28.48	57.20	28.72	QP
7	1.135	10.39	0.04	9.85	-1.68	18.60	46.00	27.40	Average
8	1.135	10.39	0.04	9.85	2.82	23.10	56.00	32.90	QP
9	6.769	10.58	0.11	9.87	4.53	25.09	50.00	24.91	Average
10	6.769	10.58	0.11	9.87	9.06	29.62	60.00	30.38	QP
11	17.944	11.04	0.18	9.93	8.31	29.46	50.00	20.54	Average
12	17.944	11.04	0.18	9.93	13.86	35.01	60.00	24.99	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

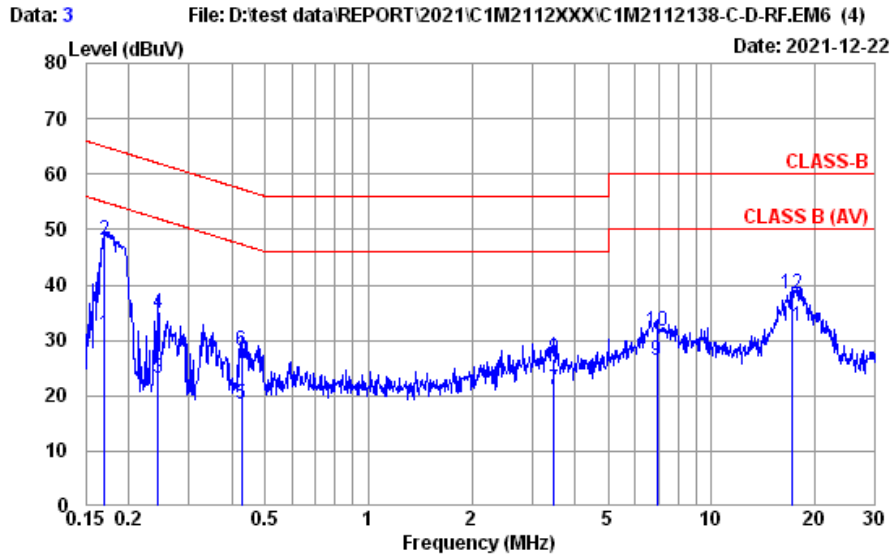


Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: I6Z90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		
	INPAQ		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.170	10.40	0.03	9.85	10.78	31.06	54.94	23.88	Average
2	0.170	10.40	0.03	9.85	27.66	47.94	64.94	17.00	QP
3	0.244	10.38	0.03	9.85	2.80	23.06	51.95	28.89	Average
4	0.244	10.38	0.03	9.85	14.51	34.77	61.95	27.18	QP
5	0.426	10.37	0.03	9.85	-1.69	18.56	47.33	28.77	Average
6	0.426	10.37	0.03	9.85	7.79	28.04	57.33	29.29	QP
7	3.472	10.42	0.08	9.86	0.81	21.17	46.00	24.83	Average
8	3.472	10.42	0.08	9.86	6.20	26.56	56.00	29.44	QP
9	6.951	10.50	0.12	9.87	5.85	26.34	50.00	23.66	Average
10	6.951	10.50	0.12	9.87	11.26	31.75	60.00	28.25	QP
11	17.109	10.72	0.18	9.92	11.64	32.46	50.00	17.54	Average
12	17.109	10.72	0.18	9.92	17.53	38.35	60.00	21.65	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

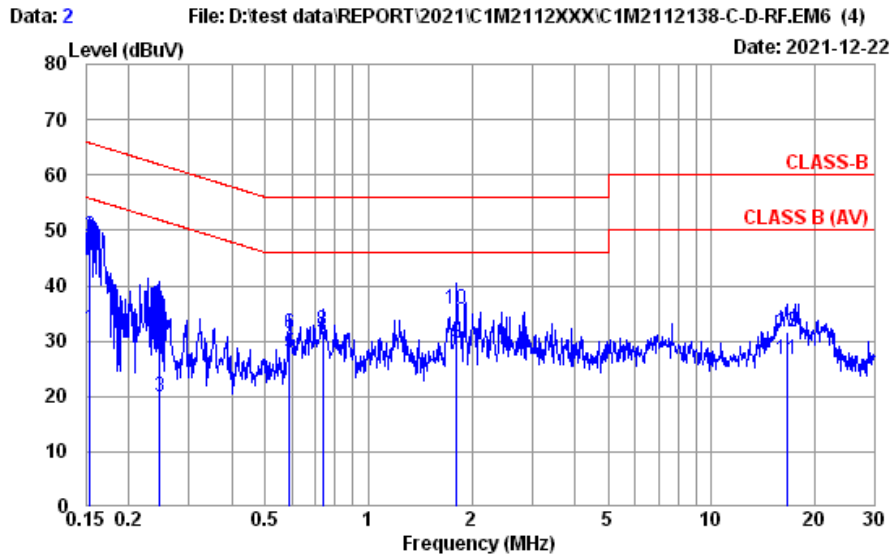


Site No. : No.8 Shielded Room Data No. : 2
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : NEUTRAL
 Environment : 22°C / 67% Engineer : Roy Hung
 EUT Model : 16Z90Q Test Rating : 120Vac/60Hz
 Test Mode : Operating
 Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.154	10.41	0.03	9.85	12.00	32.29	55.78	23.49	Average
2	0.154	10.41	0.03	9.85	28.65	48.94	65.78	16.84	QP
3	0.247	10.38	0.03	9.85	-0.34	19.92	51.86	31.94	Average
4	0.247	10.38	0.03	9.85	12.69	32.95	61.86	28.91	QP
5	0.589	10.37	0.03	9.85	7.67	27.92	46.00	18.08	Average
6	0.589	10.37	0.03	9.85	11.24	31.49	56.00	24.51	QP
7	0.735	10.38	0.04	9.85	8.97	29.24	46.00	16.76	Average
8	0.735	10.38	0.04	9.85	11.74	32.01	56.00	23.99	QP
9	1.810	10.41	0.06	9.86	9.33	29.66	46.00	16.34	Average
10	1.810	10.41	0.06	9.86	15.44	35.77	56.00	20.23	QP
11	16.573	10.99	0.18	9.92	5.45	26.54	50.00	23.46	Average
12	16.573	10.99	0.18	9.92	10.66	31.75	60.00	28.25	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

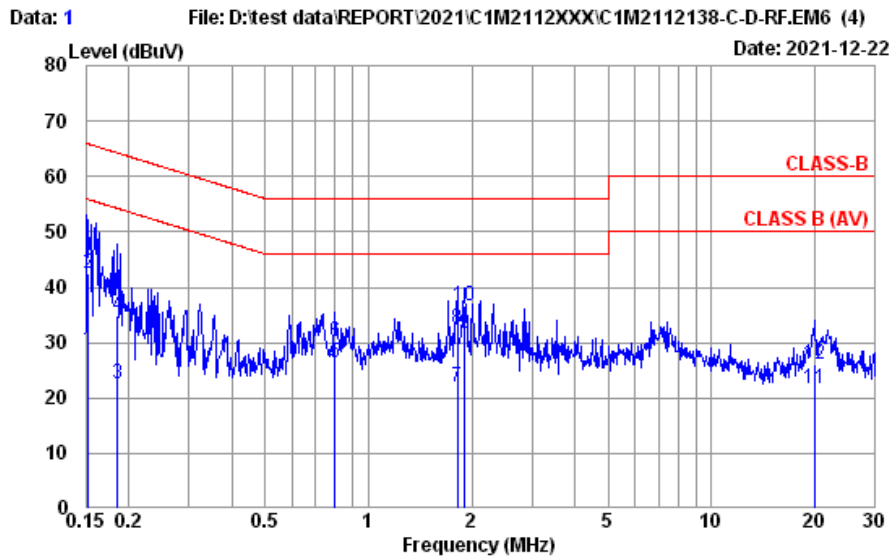

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 162900	Test Rating	: 120Vac/60Hz
Test Mode	: Operating Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.153	10.40	0.03	9.85	8.56	28.84	55.84	27.00	Average
2	0.153	10.40	0.03	9.85	22.09	42.37	65.84	23.47	QP
3	0.185	10.39	0.03	9.85	2.38	22.65	54.24	31.59	Average
4	0.185	10.39	0.03	9.85	14.49	34.76	64.24	29.48	QP
5	0.800	10.38	0.04	9.85	6.19	26.46	46.00	19.54	Average
6	0.800	10.38	0.04	9.85	9.77	30.04	56.00	25.96	QP
7	1.819	10.40	0.06	9.86	1.68	22.00	46.00	24.00	Average
8	1.819	10.40	0.06	9.86	12.16	32.48	56.00	23.52	QP
9	1.908	10.40	0.06	9.86	11.22	31.54	46.00	14.46	Average
10	1.908	10.40	0.06	9.86	16.34	36.66	56.00	19.34	QP
11	19.950	10.77	0.19	9.94	0.91	21.81	50.00	28.19	Average
12	19.950	10.77	0.19	9.94	5.28	26.18	60.00	33.82	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2021/12/22 ~ 2022/01/05	Temp./Hum.	20 ~ 23°C/60 ~ 69%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	21.77	1.28	32.43	47.18	37.80	40.00	2.20	Peak
215.270	16.12	3.53	32.24	49.63	37.04	43.50	6.46	Peak
317.120	19.50	4.53	32.25	50.33	42.11	46.00	3.89	Peak
677.960	24.68	7.17	32.13	37.71	37.43	46.00	8.57	Peak
887.480	26.26	8.37	31.53	40.30	43.40	46.00	2.60	Peak
968.960	26.88	8.81	30.81	31.51	36.39	54.00	17.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.940	22.86	1.22	32.43	45.06	36.71	40.00	3.29	Peak
94.990	15.67	2.21	32.35	54.04	39.57	43.50	3.93	Peak
317.120	19.50	4.53	32.25	52.34	44.12	46.00	1.88	Peak
508.210	23.22	6.46	32.23	42.98	40.43	46.00	5.57	Peak
887.480	26.26	8.37	31.53	37.98	41.08	46.00	4.92	Peak
963.140	26.83	8.78	30.89	32.65	37.37	54.00	16.63	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	21.77	1.28	32.43	46.46	37.08	40.00	2.92	Peak
215.270	16.12	3.53	32.24	49.41	36.82	43.50	6.68	Peak
317.120	19.50	4.53	32.25	51.24	43.02	46.00	2.98	Peak
677.960	24.68	7.17	32.13	38.95	38.67	46.00	7.33	Peak
888.450	26.26	8.37	31.53	38.68	41.78	46.00	4.22	Peak
966.050	26.85	8.79	30.89	32.29	37.04	54.00	16.96	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	32.43	45.13	37.16	40.00	2.84	Peak
98.870	16.33	2.26	32.35	53.28	39.52	43.50	3.98	Peak
322.940	19.67	4.62	32.25	51.60	43.64	46.00	2.36	Peak
536.340	23.57	6.56	32.26	42.29	40.16	46.00	5.84	Peak
888.450	26.26	8.37	31.53	37.58	40.68	46.00	5.32	Peak
966.050	26.85	8.79	30.89	31.03	35.78	54.00	18.22	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

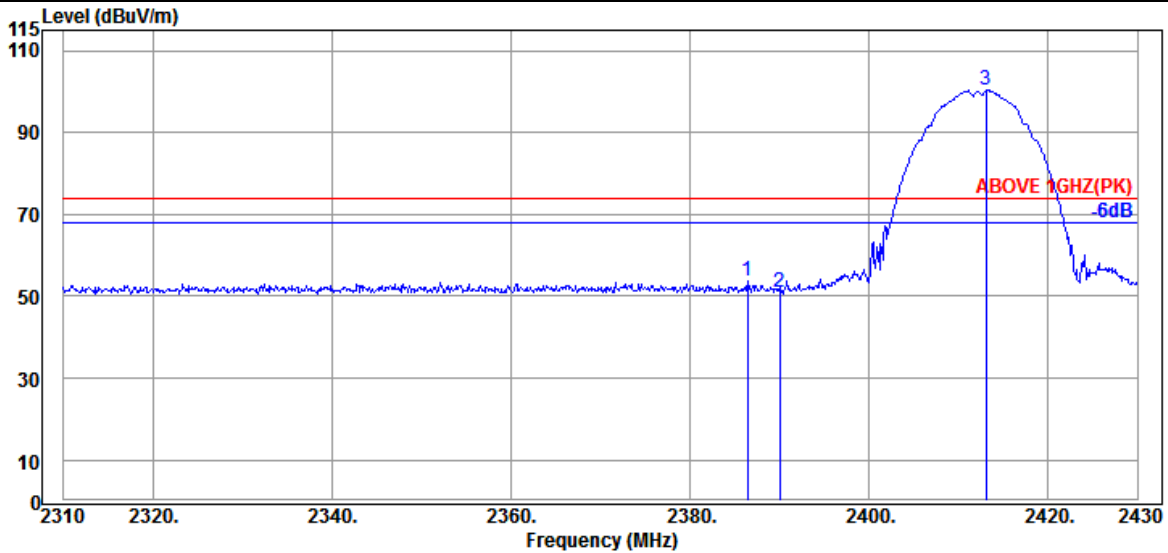

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.440	27.57	6.04	33.20	53.16	53.57	74.00	20.43	Peak
2390.040	27.57	6.04	33.19	50.69	51.11	74.00	22.89	Peak
@ 2413.080	27.66	6.07	33.17	100.01	100.57	---	---	Peak

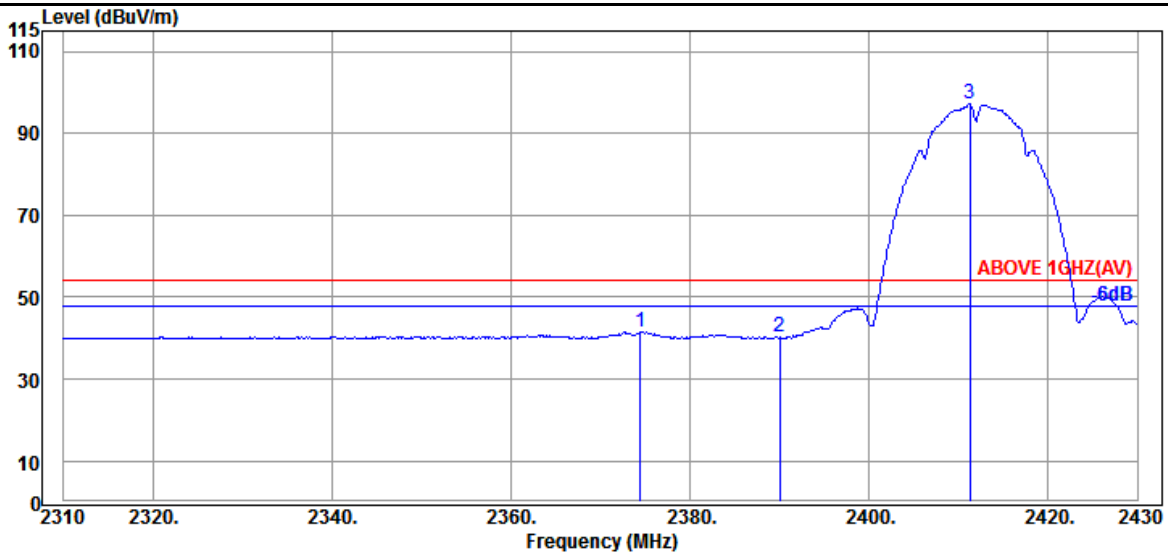


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.440	27.54	6.01	33.21	41.11	41.45	54.00	12.55	Average
2390.040	27.57	6.04	33.19	39.73	40.15	54.00	13.85	Average
@ 2411.280	27.66	6.07	33.17	96.47	97.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

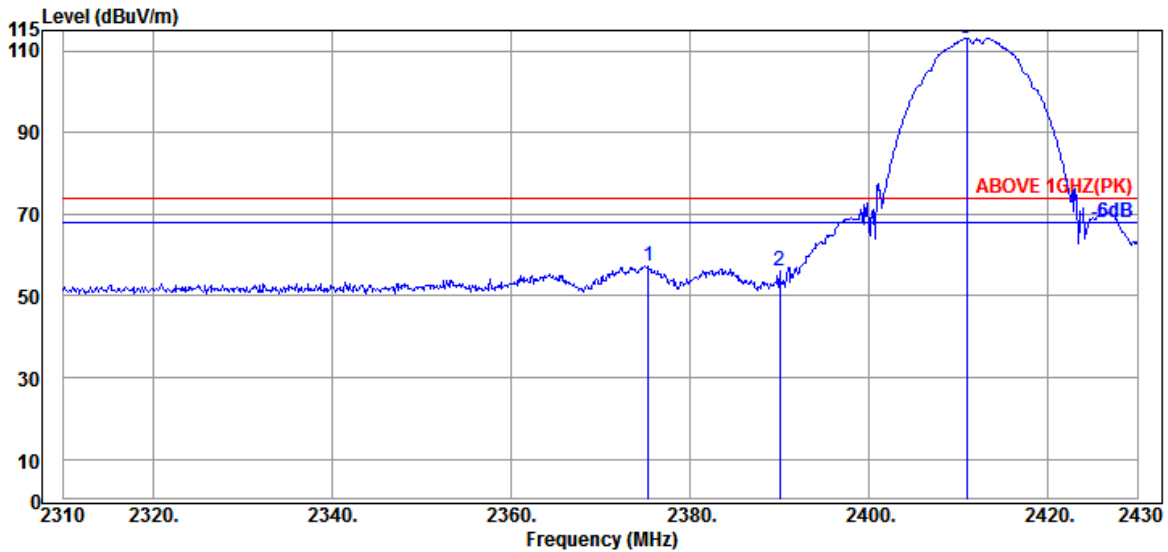

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.400	27.54	6.01	33.21	56.97	57.31	74.00	16.69	Peak
2390.040	27.57	6.04	33.19	55.52	55.94	74.00	18.06	Peak
@ 2410.920	27.63	6.07	33.17	112.52	113.05	---	---	Peak

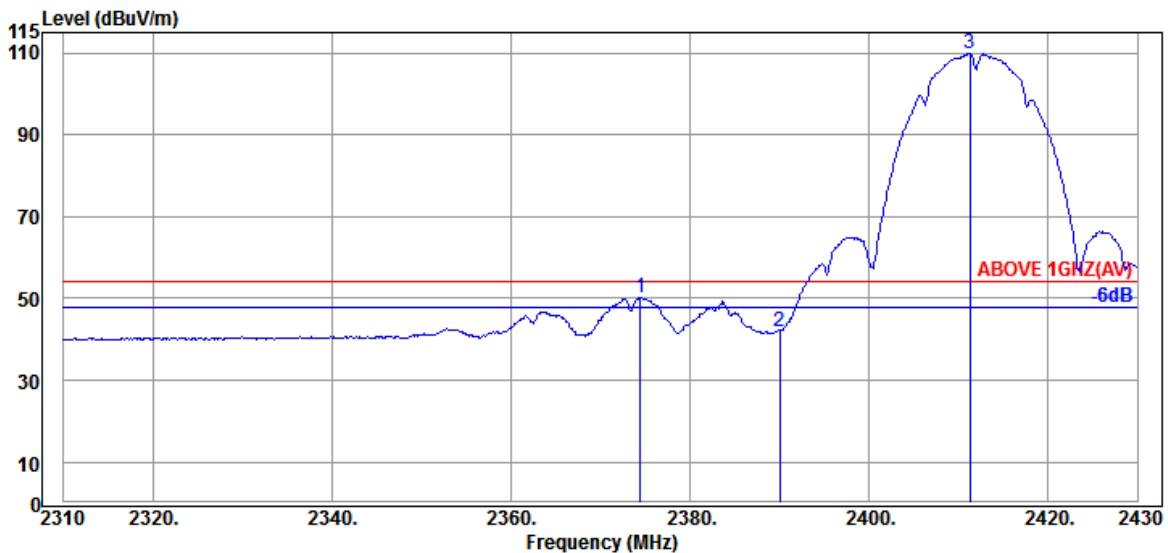


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.440	27.54	6.01	33.21	49.77	50.11	54.00	3.89	Average
2390.040	27.57	6.04	33.19	41.66	42.08	54.00	11.92	Average
@ 2411.280	27.66	6.07	33.17	109.33	109.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

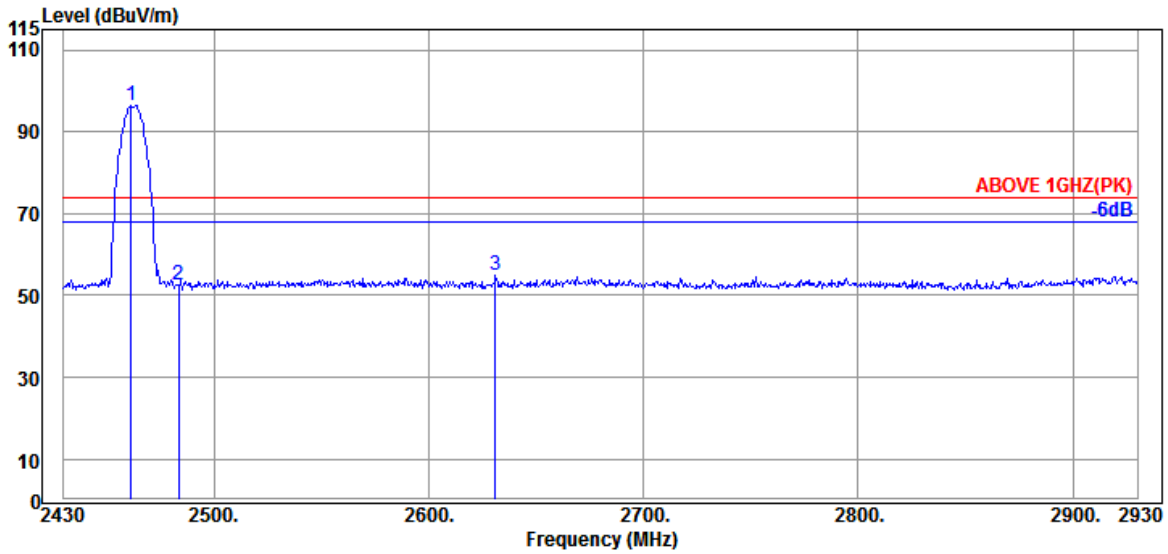

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	27.89	6.15	33.13	95.48	96.39	---	---	Peak
2483.500	28.01	6.18	33.11	51.29	52.37	74.00	21.63	Peak
2631.000	28.70	6.38	33.00	52.98	55.06	74.00	18.94	Peak

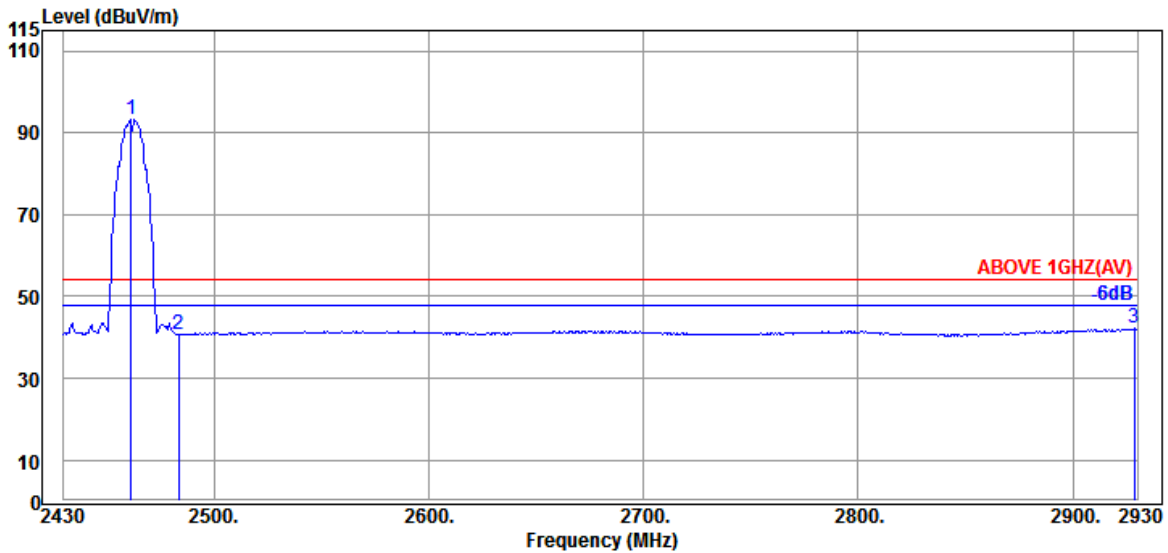


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	27.89	6.15	33.13	92.49	93.40	---	---	Average
2483.500	28.01	6.18	33.11	39.72	40.80	54.00	13.20	Average
2928.500	29.20	6.75	32.79	38.94	42.10	54.00	11.90	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

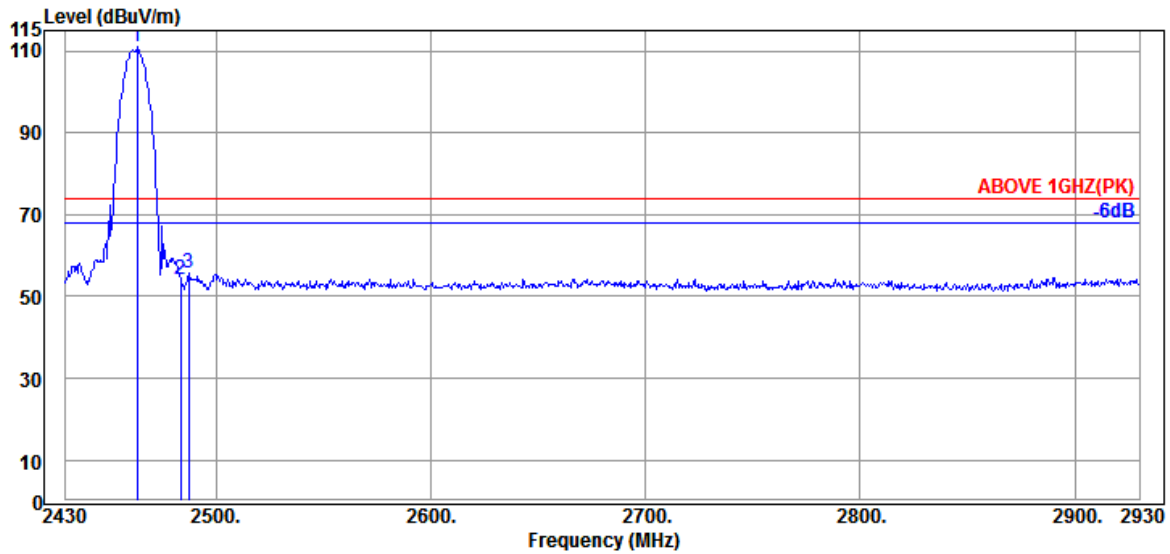

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	27.89	6.15	33.13	110.08	110.99	---	---	Peak
2483.500	28.01	6.18	33.11	52.92	54.00	74.00	20.00	Peak
2487.500	28.01	6.21	33.11	54.70	55.81	74.00	18.19	Peak

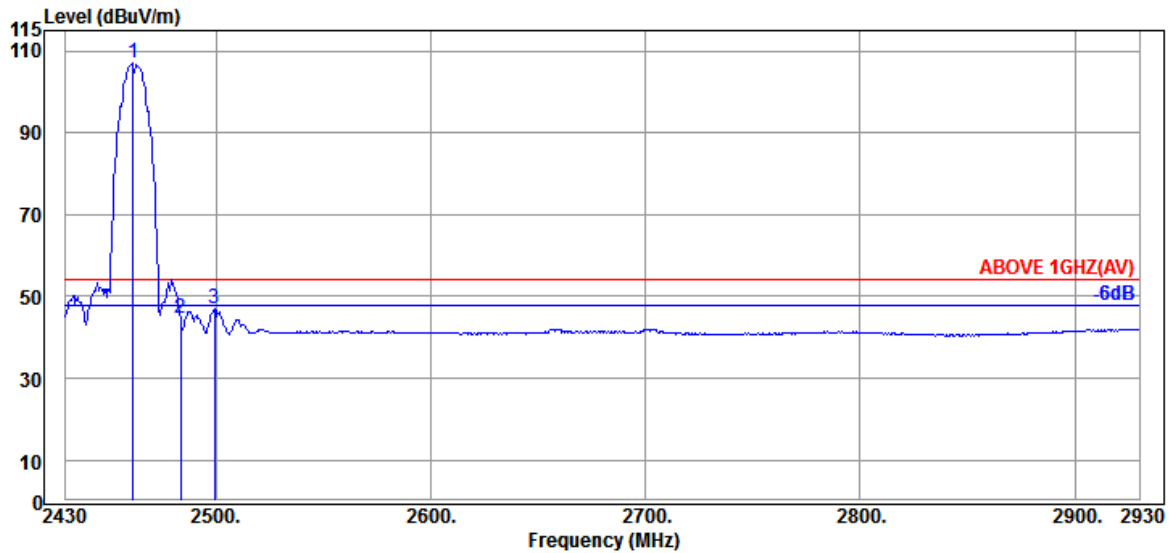


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	27.89	6.15	33.13	106.31	107.22	---	---	Average
2483.500	28.01	6.18	33.11	43.66	44.74	54.00	9.26	Average
2499.500	28.10	6.21	33.10	45.78	46.99	54.00	7.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

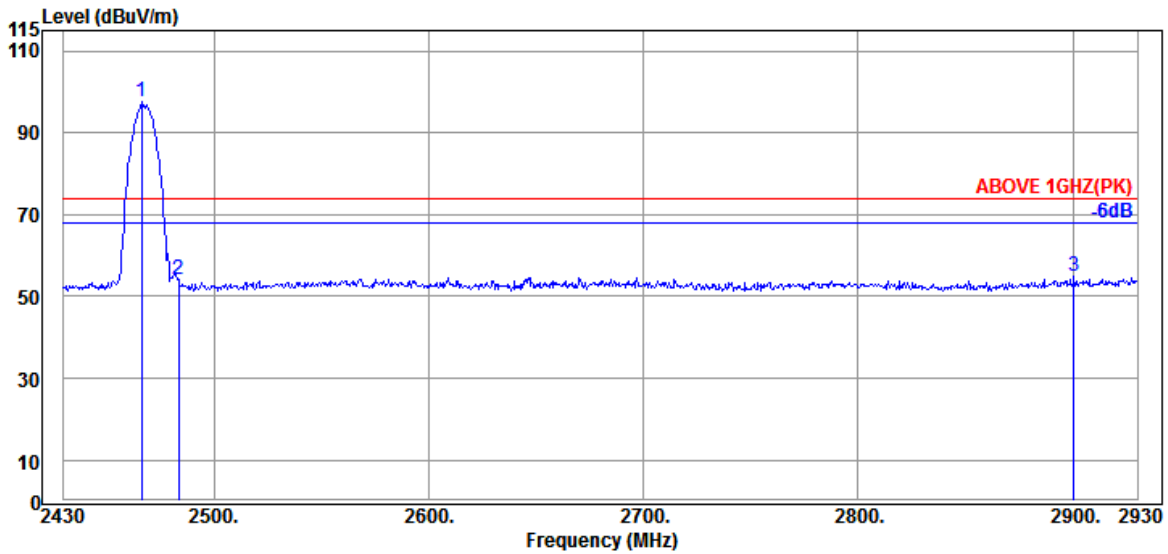

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	27.89	6.15	33.13	96.72	97.63	---	---	Peak
2483.500	28.01	6.18	33.11	52.87	53.95	74.00	20.05	Peak
2900.500	29.20	6.73	32.81	51.74	54.86	74.00	19.14	Peak

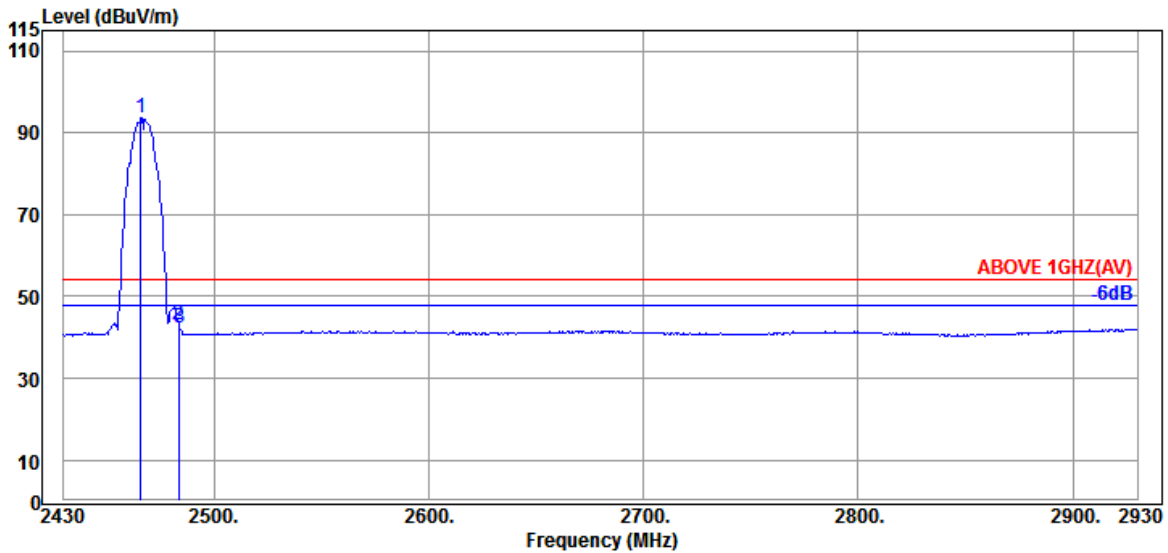


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	27.89	6.15	33.13	92.71	93.62	---	---	Average
2483.500	28.01	6.18	33.11	41.90	42.98	54.00	11.02	Average
2484.000	28.01	6.18	33.11	41.07	42.15	54.00	11.85	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

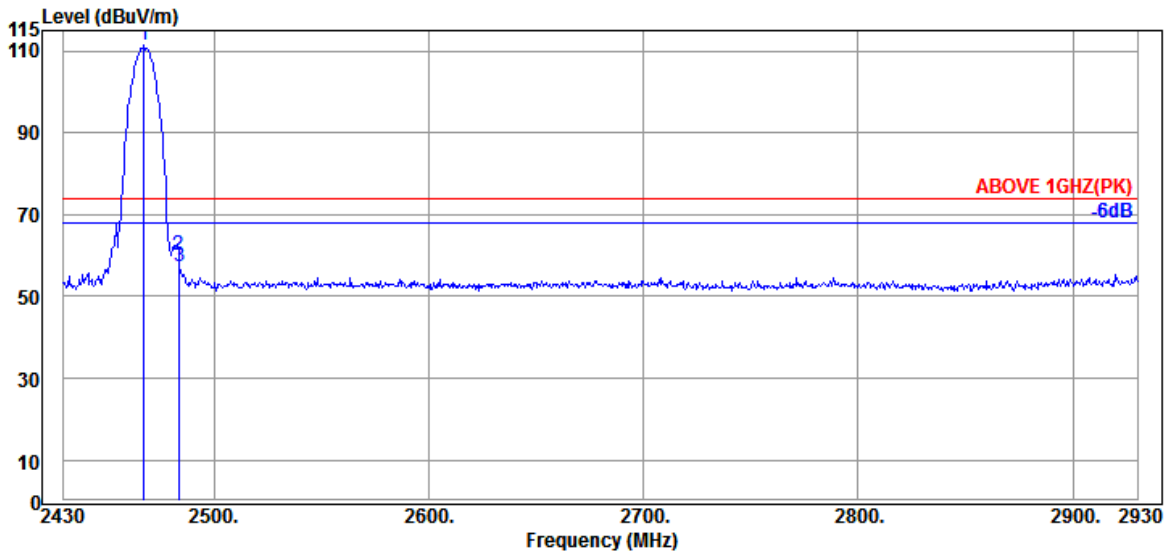

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	27.89	6.15	33.13	110.58	111.49	---	---	Peak
2483.500	28.01	6.18	33.11	59.07	60.15	74.00	13.85	Peak
2484.000	28.01	6.18	33.11	56.41	57.49	74.00	16.51	Peak

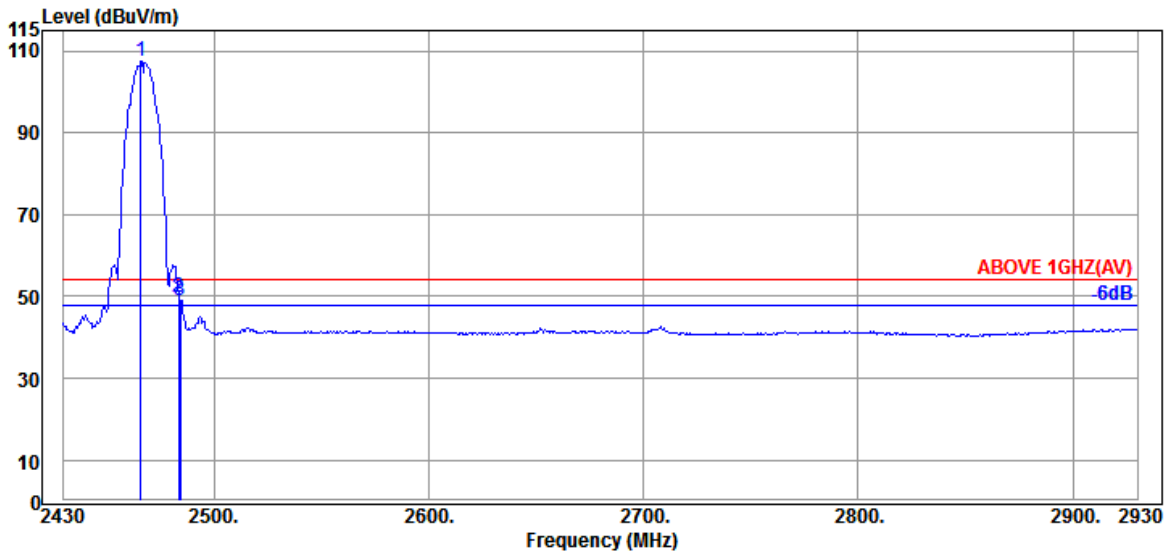


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	27.89	6.15	33.13	106.45	107.36	---	---	Average
2483.500	28.01	6.18	33.11	48.84	49.92	54.00	4.08	Average
2484.500	28.01	6.18	33.11	48.00	49.08	54.00	4.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

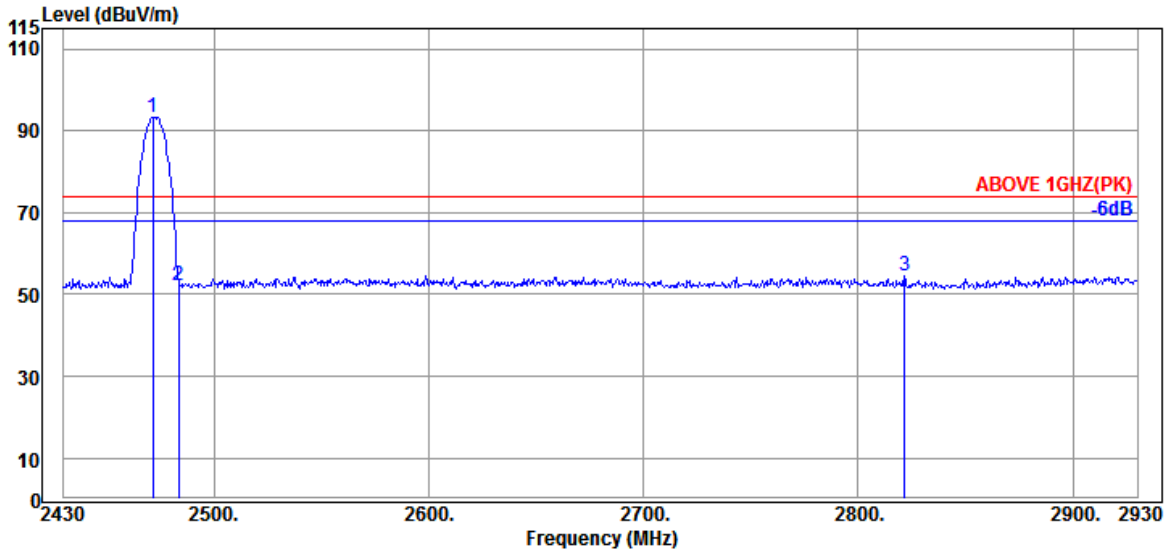

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	92.43	93.41	---	---	Peak
2483.500	28.01	6.18	33.11	51.19	52.27	74.00	21.73	Peak
2821.500	28.85	6.62	32.86	51.76	54.37	74.00	19.63	Peak

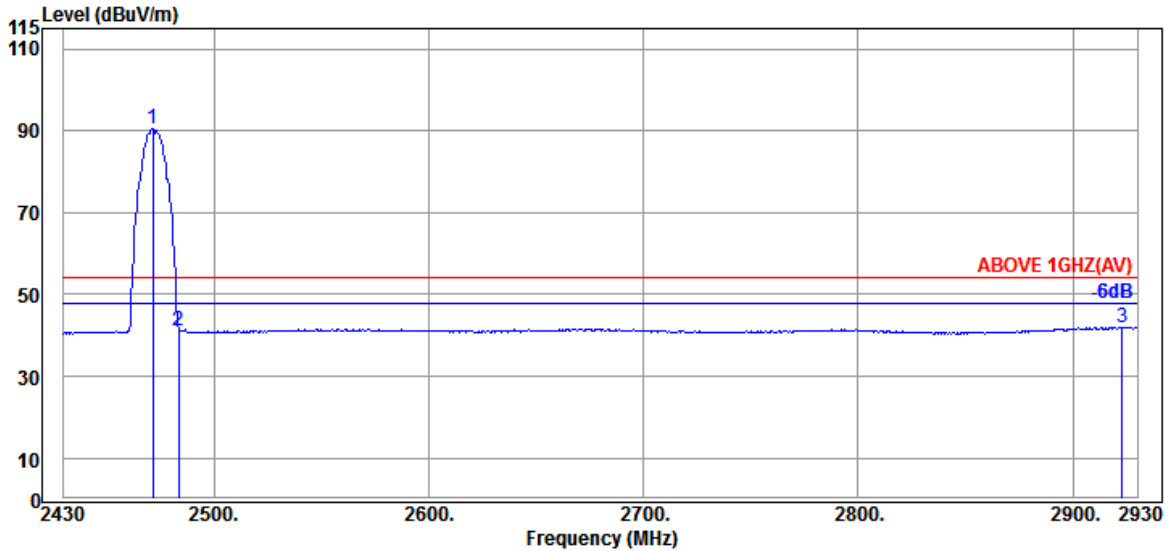


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	89.41	90.39	---	---	Average
2483.500	28.01	6.18	33.11	40.06	41.14	54.00	12.86	Average
2923.000	29.20	6.75	32.80	38.77	41.92	54.00	12.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

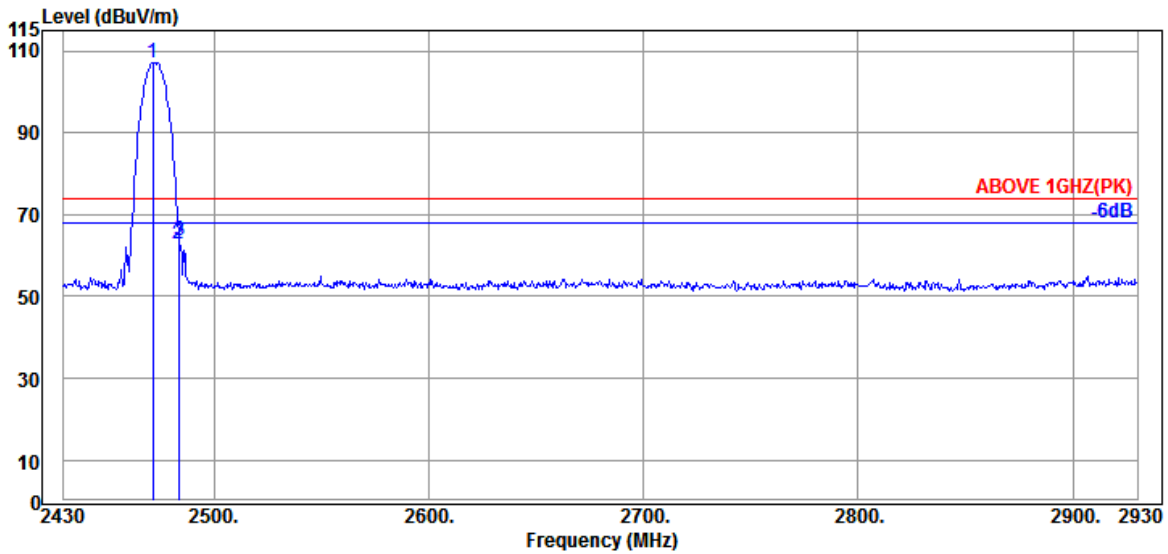

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	106.30	107.28	---	---	Peak
2483.500	28.01	6.18	33.11	61.63	62.71	74.00	11.29	Peak
2484.000	28.01	6.18	33.11	62.45	63.53	74.00	10.47	Peak

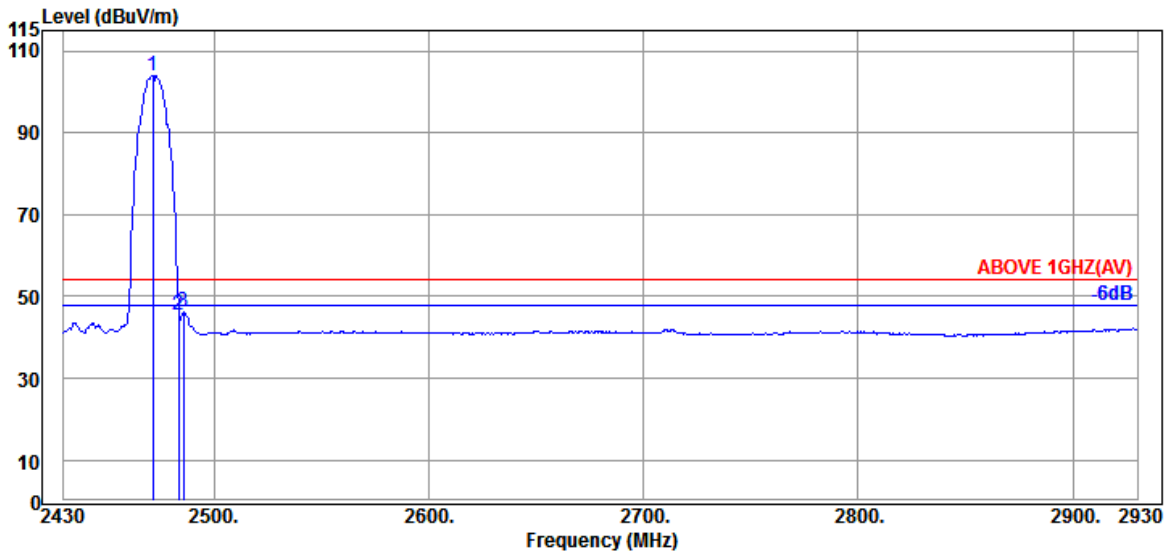


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	103.11	104.09	---	---	Average
2483.500	28.01	6.18	33.11	44.42	45.50	54.00	8.50	Average
2486.000	28.01	6.18	33.11	45.03	46.11	54.00	7.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

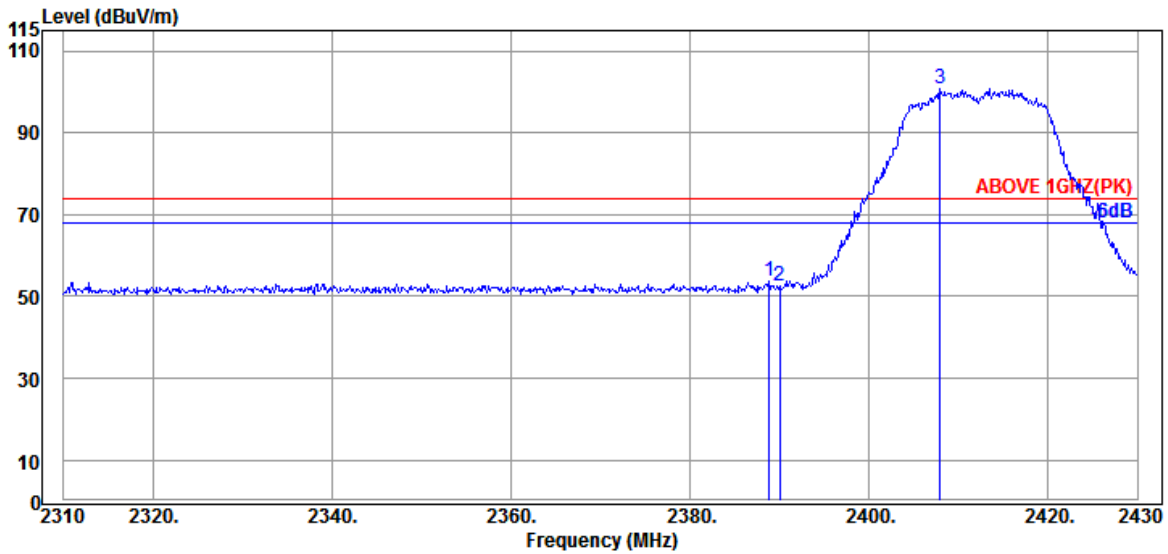

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.840	27.57	6.04	33.19	53.17	53.59	74.00	20.41	Peak
2390.040	27.57	6.04	33.19	51.95	52.37	74.00	21.63	Peak
@ 2407.920	27.63	6.07	33.18	100.15	100.67	---	---	Peak

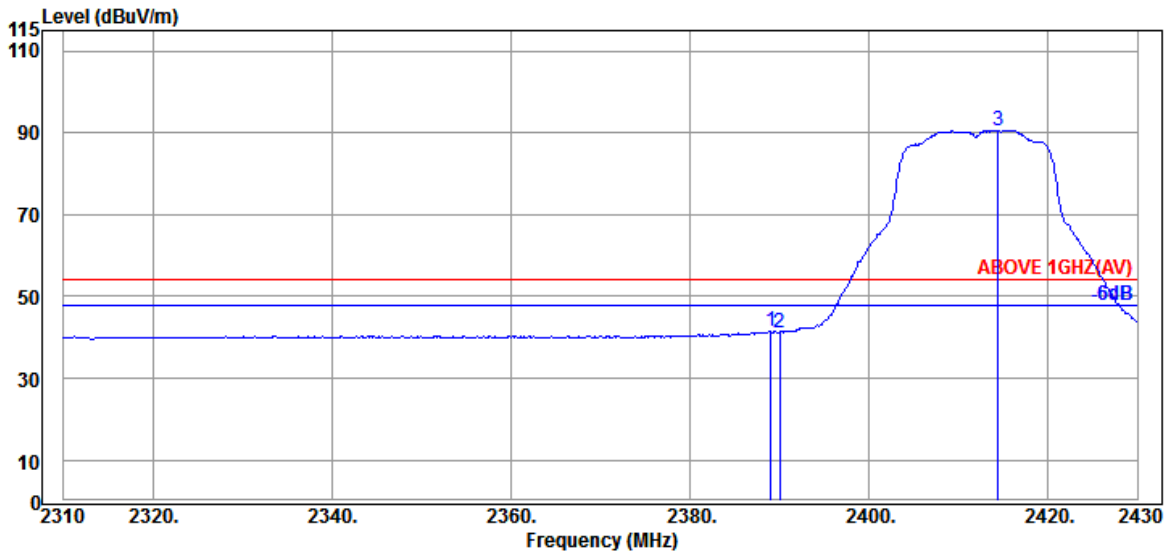


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.080	27.57	6.04	33.19	40.92	41.34	54.00	12.66	Average
2390.040	27.57	6.04	33.19	40.80	41.22	54.00	12.78	Average
@ 2414.400	27.66	6.07	33.17	90.13	90.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

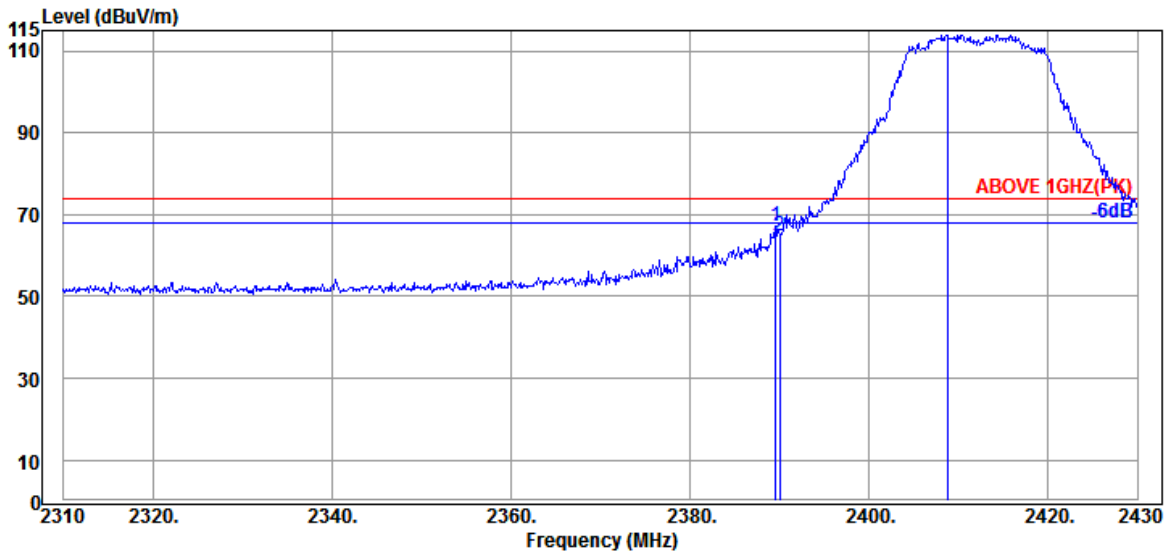

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	66.83	67.25	74.00	6.75	Peak
2390.040	27.57	6.04	33.19	64.41	64.83	74.00	9.17	Peak
@ 2408.760	27.63	6.07	33.18	113.39	113.91	---	---	Peak

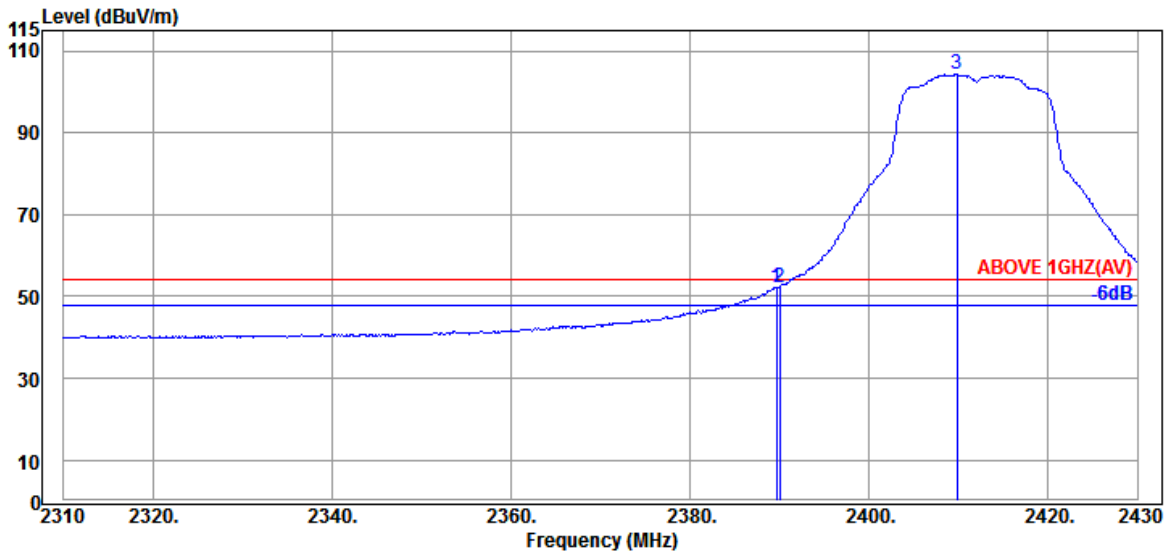


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	51.85	52.27	54.00	1.73	Average
2390.040	27.57	6.04	33.19	51.63	52.05	54.00	1.95	Average
@ 2409.840	27.63	6.07	33.18	103.92	104.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

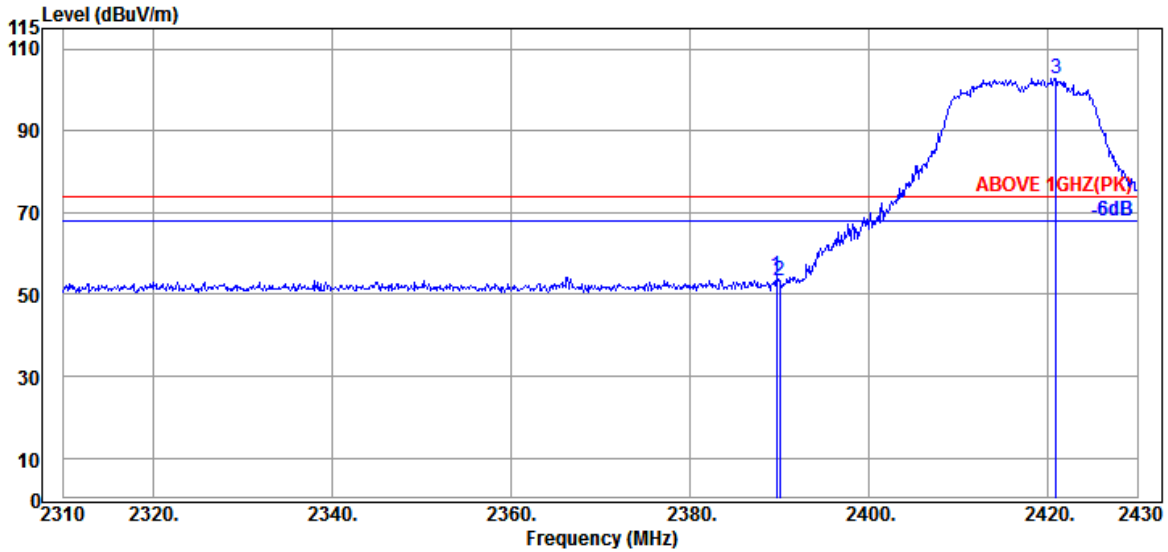

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	54.01	54.43	74.00	19.57	Peak
2390.040	27.57	6.04	33.19	52.84	53.26	74.00	20.74	Peak
@ 2420.880	27.69	6.10	33.17	102.19	102.81	---	---	Peak

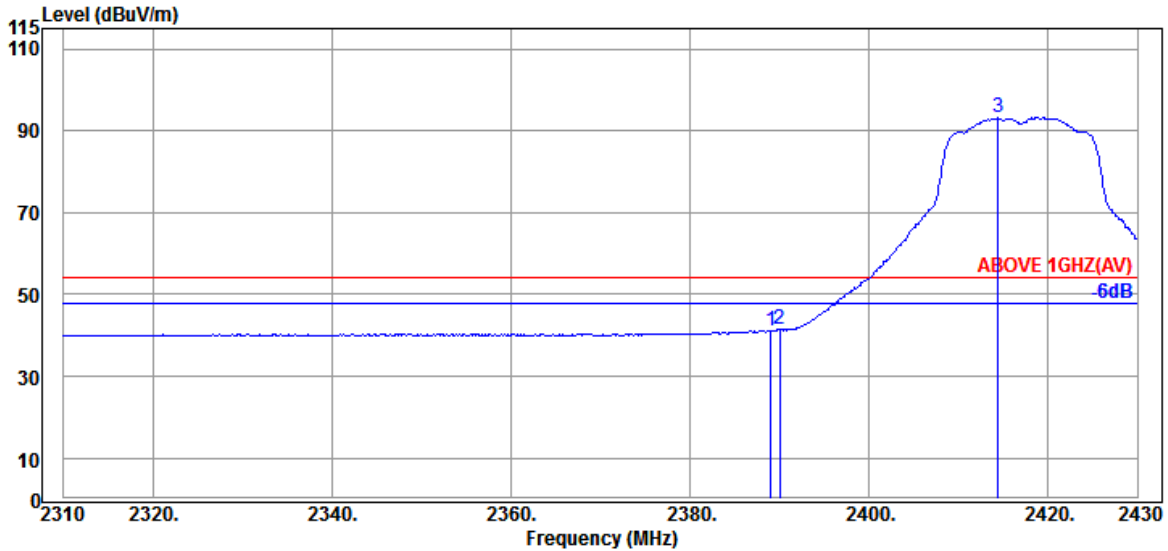


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	27.57	6.04	33.19	40.86	41.28	54.00	12.72	Average
2390.040	27.57	6.04	33.19	40.95	41.37	54.00	12.63	Average
@ 2414.400	27.66	6.07	33.17	92.63	93.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

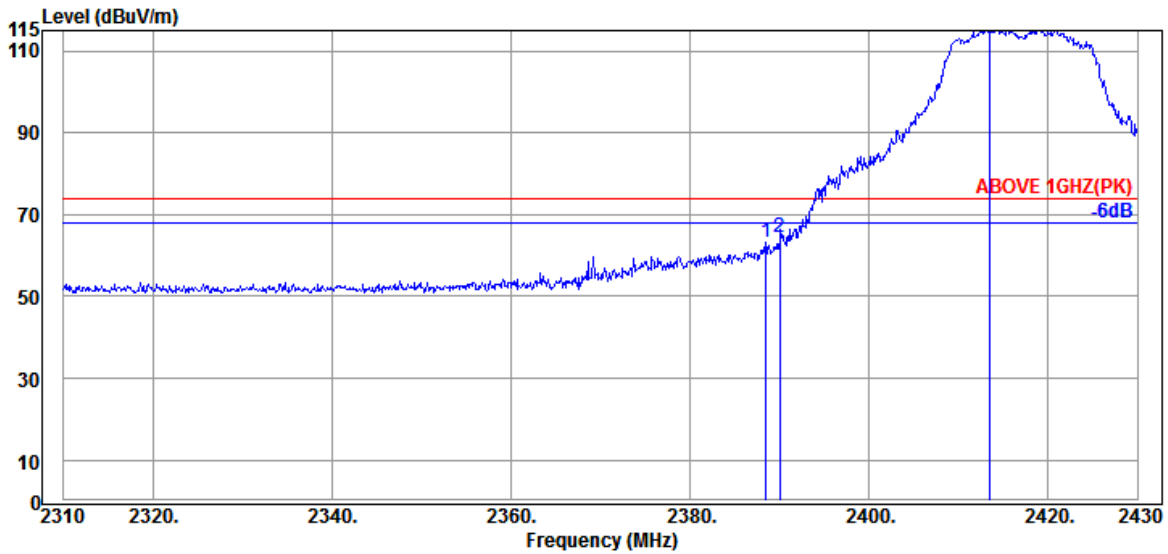

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.480	27.57	6.04	33.19	62.85	63.27	74.00	10.73	Peak
2390.040	27.57	6.04	33.19	64.04	64.46	74.00	9.54	Peak
@ 2413.440	27.66	6.07	33.17	115.31	115.87	---	---	Peak

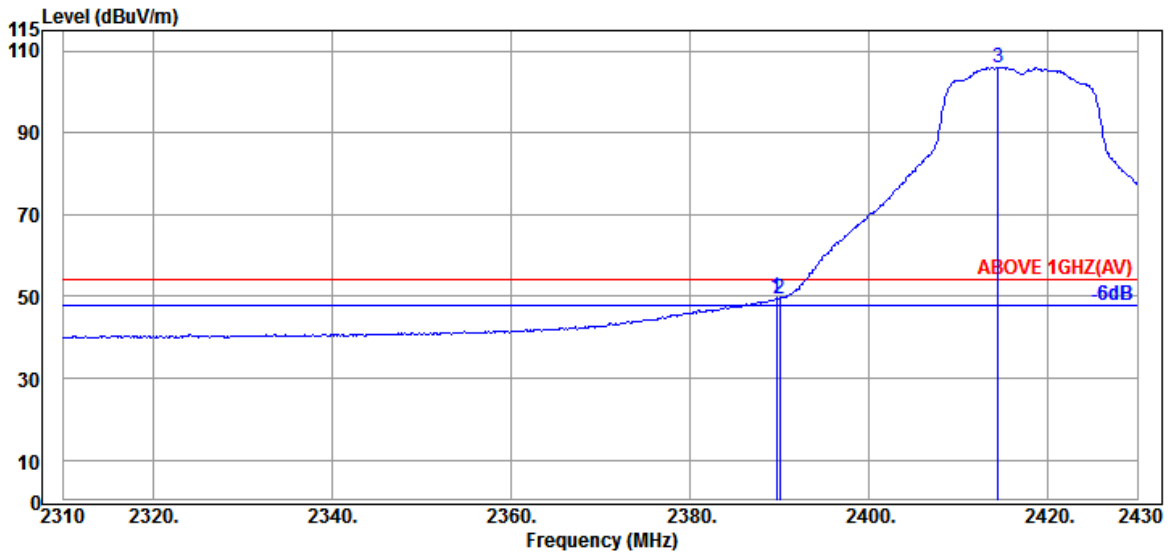


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	49.37	49.79	54.00	4.21	Average
2390.040	27.57	6.04	33.19	49.15	49.57	54.00	4.43	Average
@ 2414.400	27.66	6.07	33.17	105.48	106.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

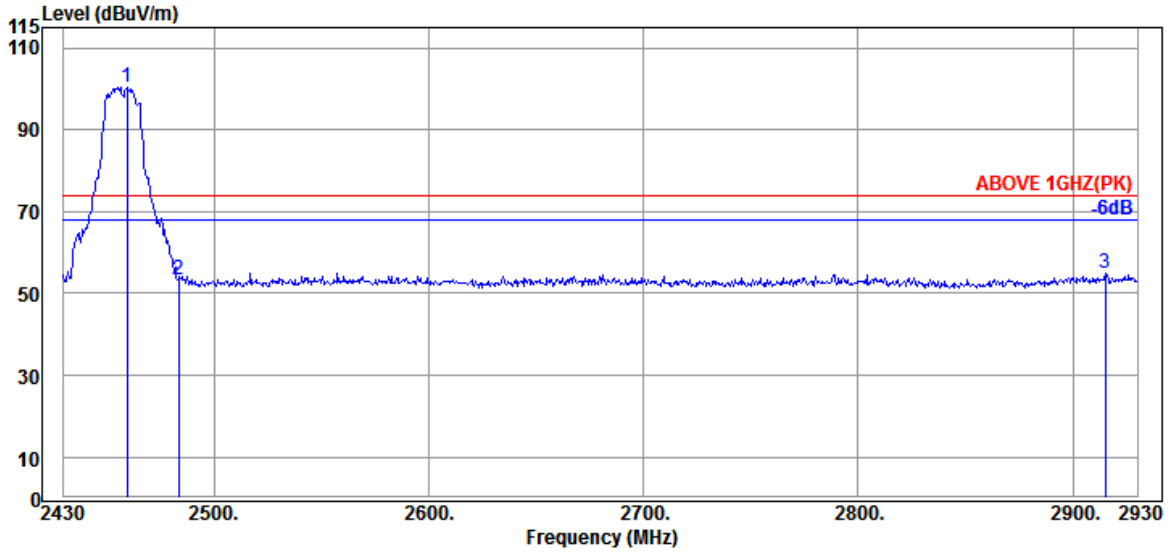

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	99.66	100.52	---	---	Peak
2483.500	28.01	6.18	33.11	52.36	53.44	74.00	20.56	Peak
2915.000	29.20	6.75	32.81	51.66	54.80	74.00	19.20	Peak

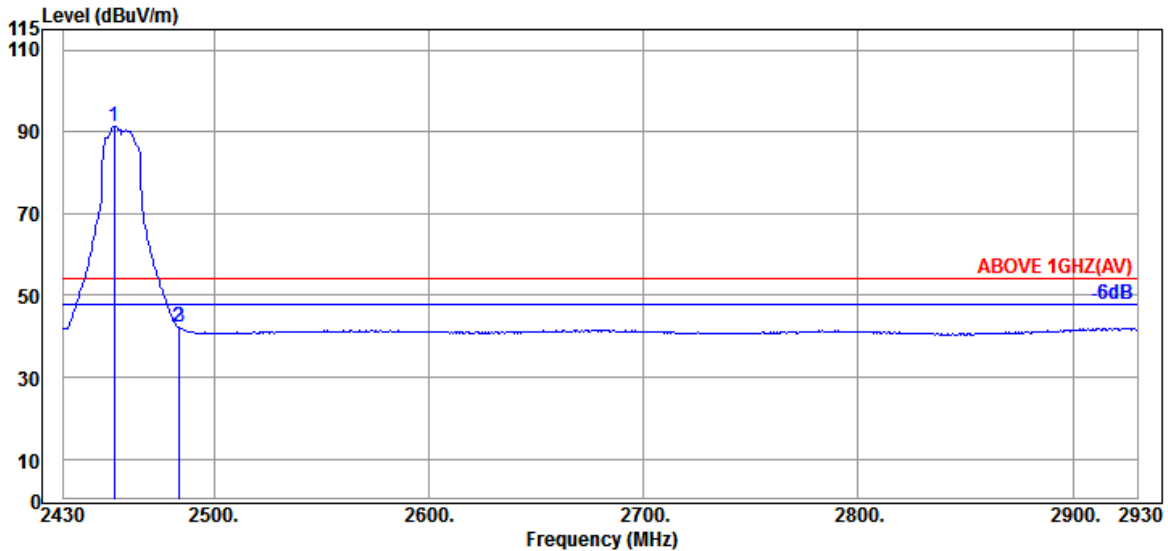


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	27.84	6.15	33.14	90.41	91.26	---	---	Average
2483.500	28.01	6.18	33.11	41.18	42.26	54.00	11.74	Average
2484.000	28.01	6.18	33.11	41.06	42.14	54.00	11.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

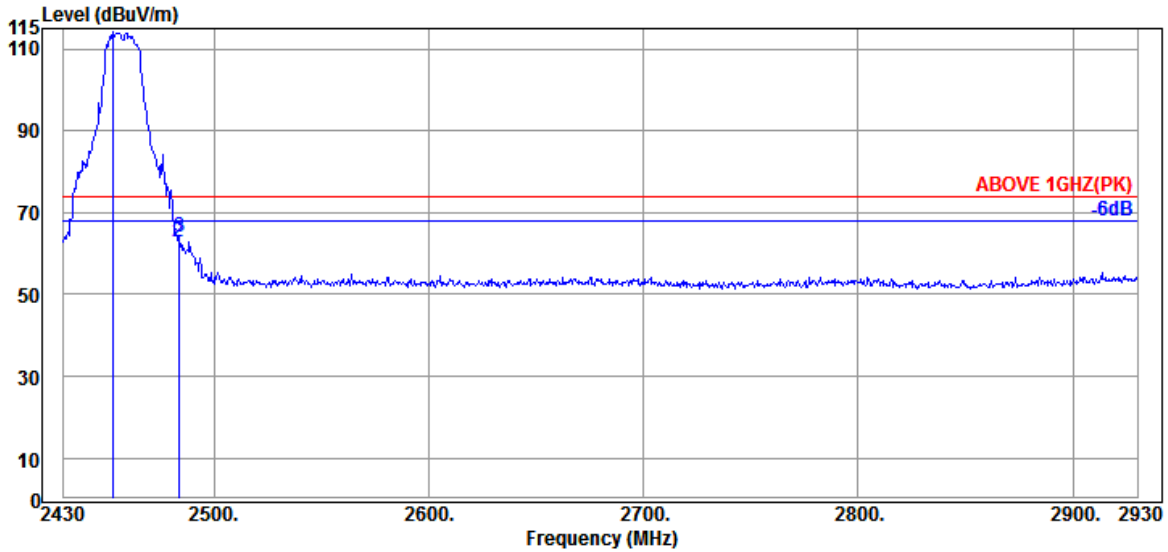

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.000	27.80	6.13	33.14	113.38	114.17	---	---	Peak
2483.500	28.01	6.18	33.11	61.81	62.89	74.00	11.11	Peak
2484.000	28.01	6.18	33.11	62.87	63.95	74.00	10.05	Peak

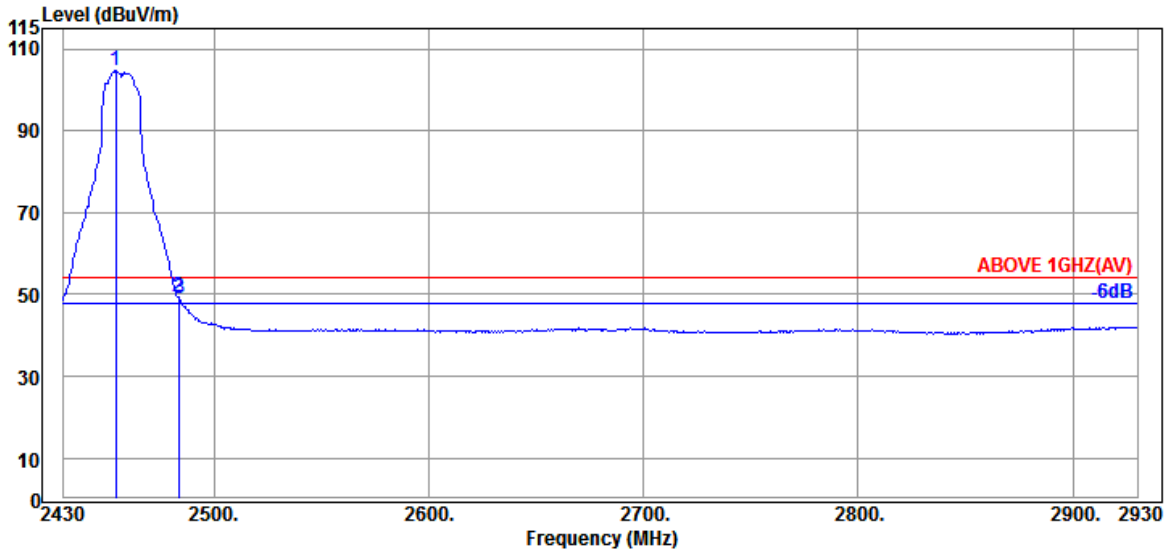


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.500	27.84	6.15	33.14	103.74	104.59	---	---	Average
2483.500	28.01	6.18	33.11	48.23	49.31	54.00	4.69	Average
2484.000	28.01	6.18	33.11	47.74	48.82	54.00	5.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

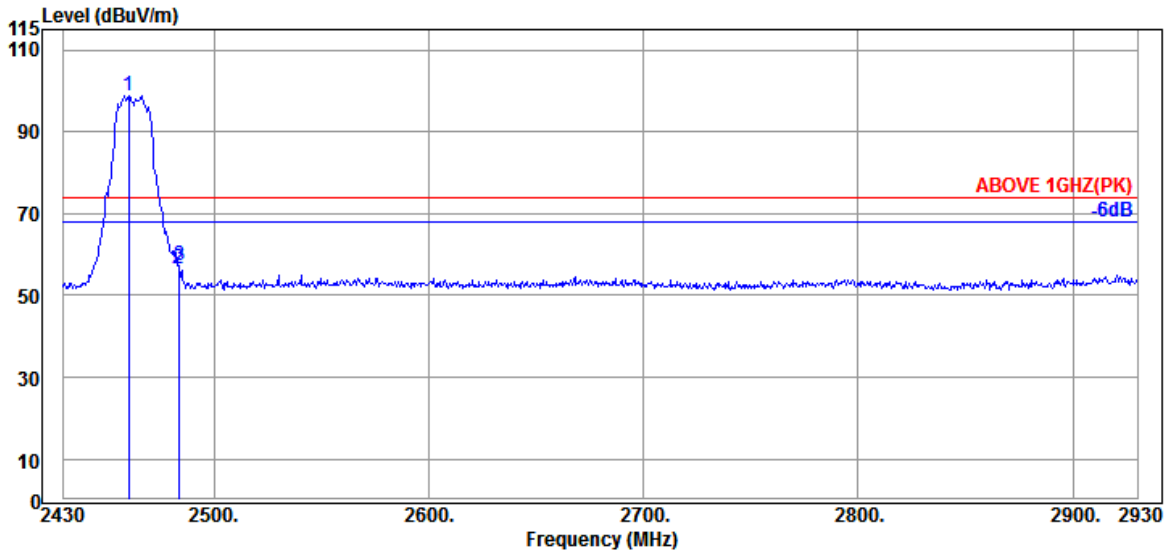

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	27.89	6.15	33.13	98.08	98.99	---	---	Peak
2483.500	28.01	6.18	33.11	55.36	56.44	74.00	17.56	Peak
2484.000	28.01	6.18	33.11	56.07	57.15	74.00	16.85	Peak

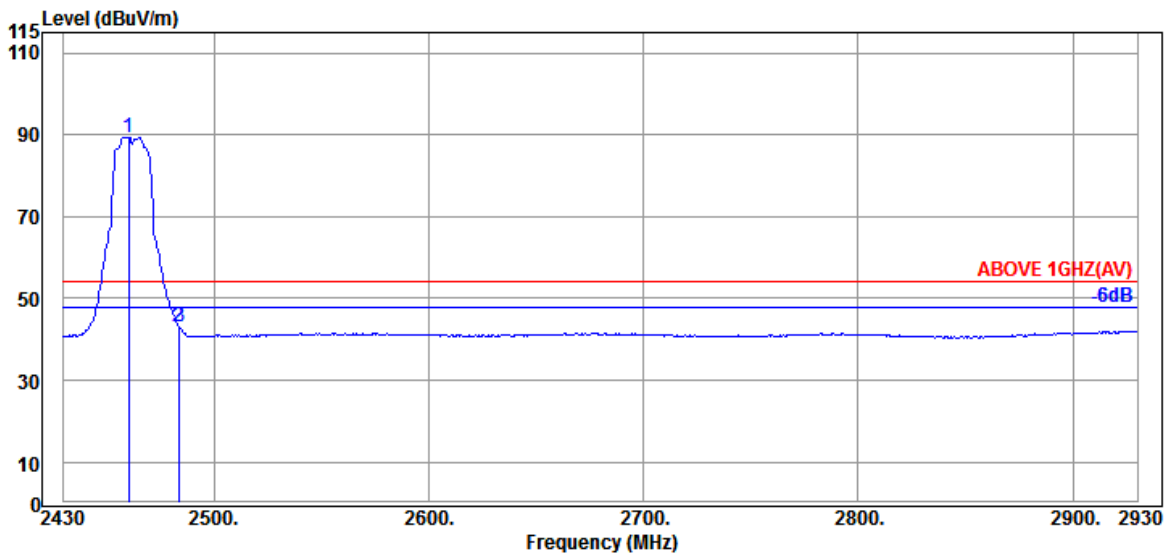


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	27.89	6.15	33.13	88.42	89.33	---	---	Average
2483.500	28.01	6.18	33.11	42.11	43.19	54.00	10.81	Average
2484.000	28.01	6.18	33.11	41.94	43.02	54.00	10.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

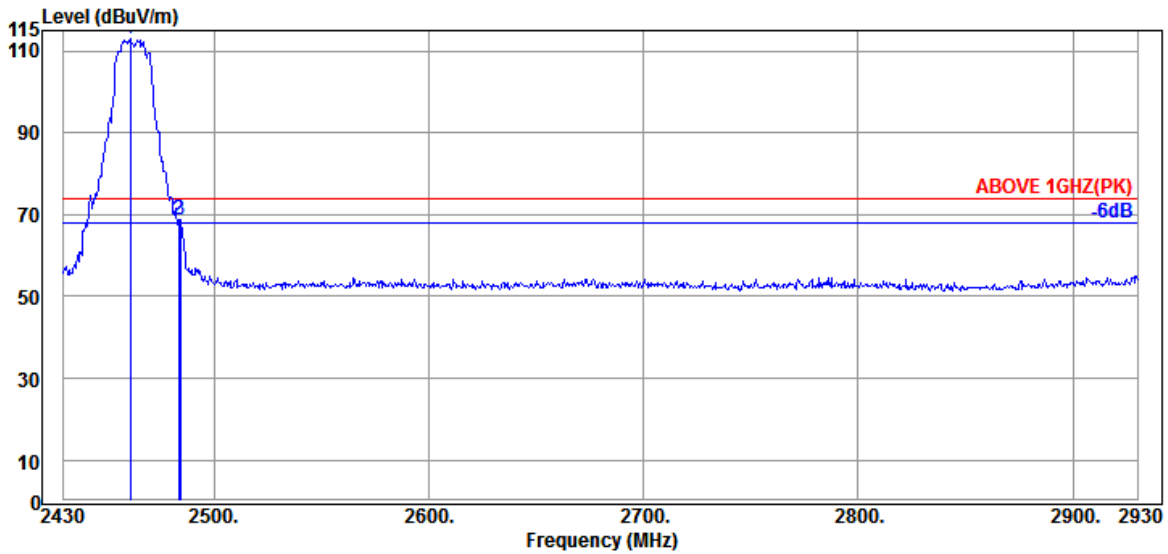

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	27.89	6.15	33.13	112.20	113.11	---	---	Peak
2483.500	28.01	6.18	33.11	67.51	68.59	74.00	5.41	Peak
2484.500	28.01	6.18	33.11	67.63	68.71	74.00	5.29	Peak

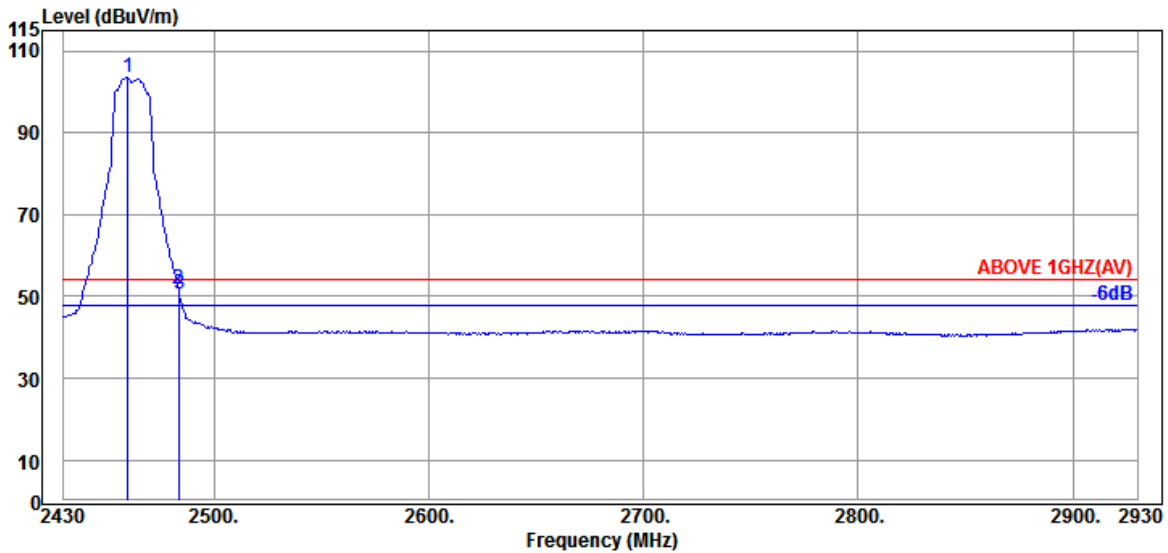


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.000	27.84	6.15	33.13	102.75	103.61	---	---	Average
2483.500	28.01	6.18	33.11	50.88	51.96	54.00	2.04	Average
2484.000	28.01	6.18	33.11	49.48	50.56	54.00	3.44	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

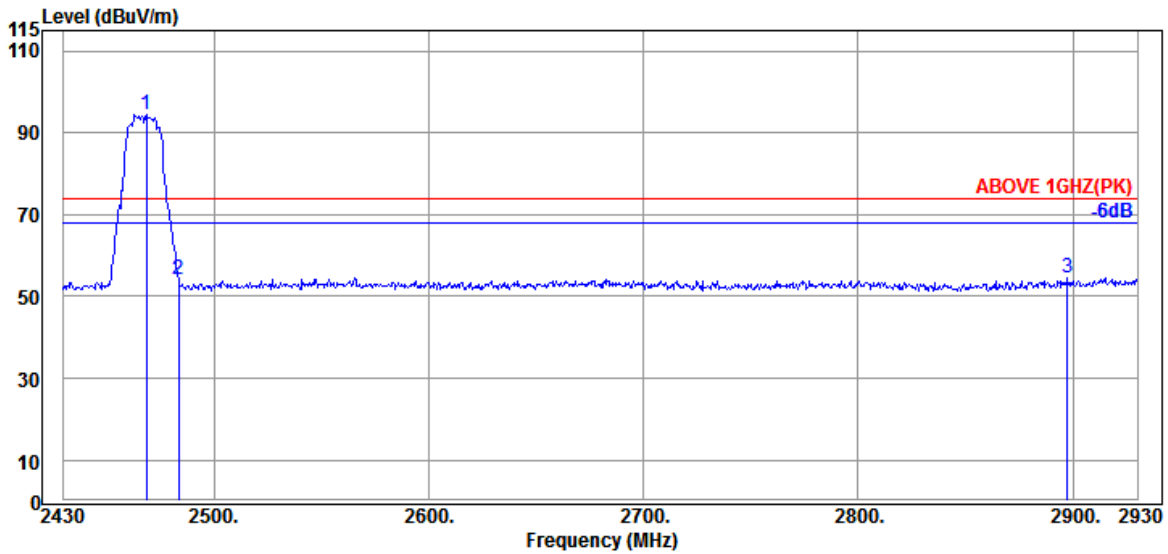

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	27.93	6.15	33.13	93.45	94.40	---	---	Peak
2483.500	28.01	6.18	33.11	52.91	53.99	74.00	20.01	Peak
2897.500	29.20	6.73	32.81	51.36	54.48	74.00	19.52	Peak

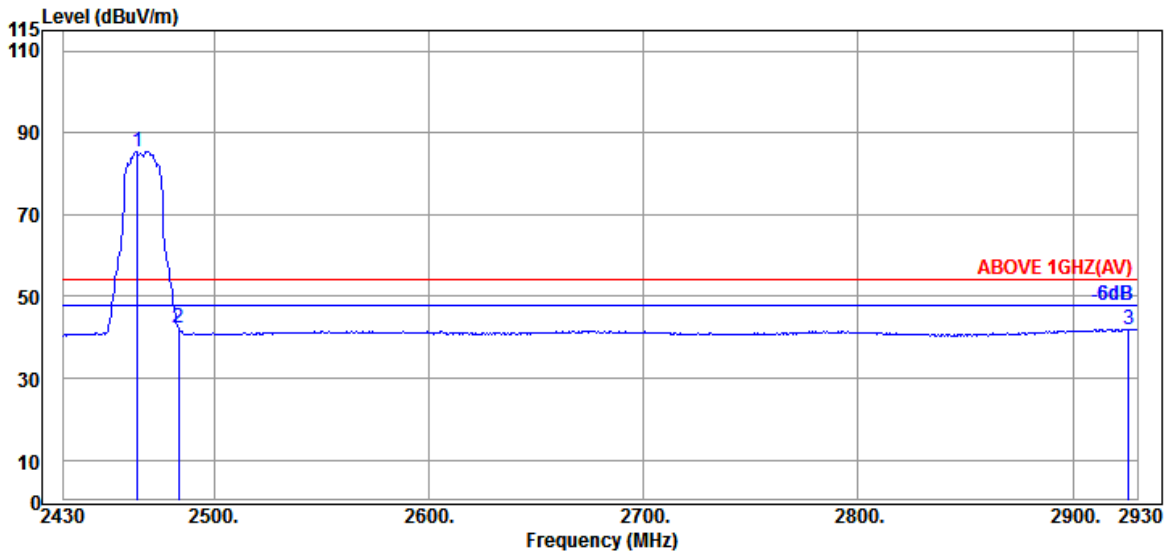


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	27.89	6.15	33.13	84.55	85.46	---	---	Average
2483.500	28.01	6.18	33.11	41.06	42.14	54.00	11.86	Average
2926.000	29.20	6.75	32.79	38.87	42.03	54.00	11.97	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

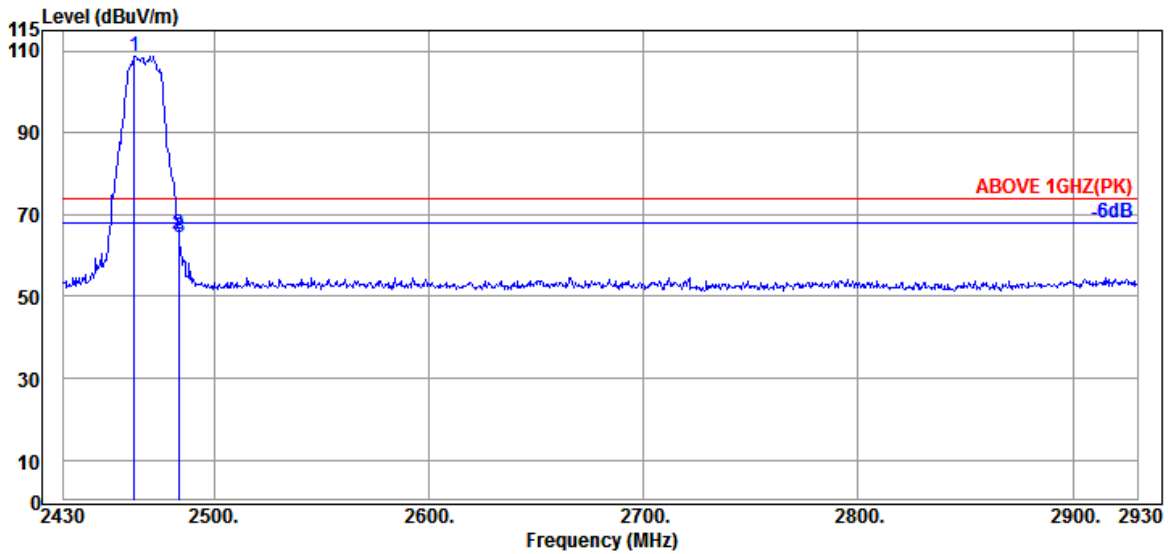

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	27.89	6.15	33.13	107.91	108.82	---	---	Peak
2483.500	28.01	6.18	33.11	64.29	65.37	74.00	8.63	Peak
2484.000	28.01	6.18	33.11	63.50	64.58	74.00	9.42	Peak

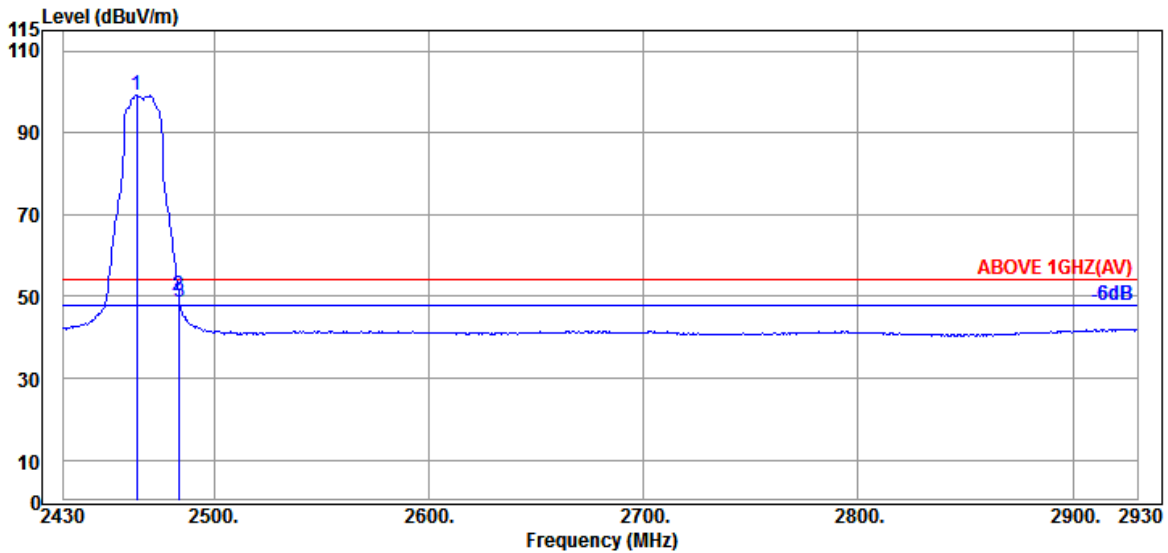


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	27.89	6.15	33.13	98.25	99.16	---	---	Average
2483.500	28.01	6.18	33.11	49.25	50.33	54.00	3.67	Average
2484.000	28.01	6.18	33.11	47.35	48.43	54.00	5.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

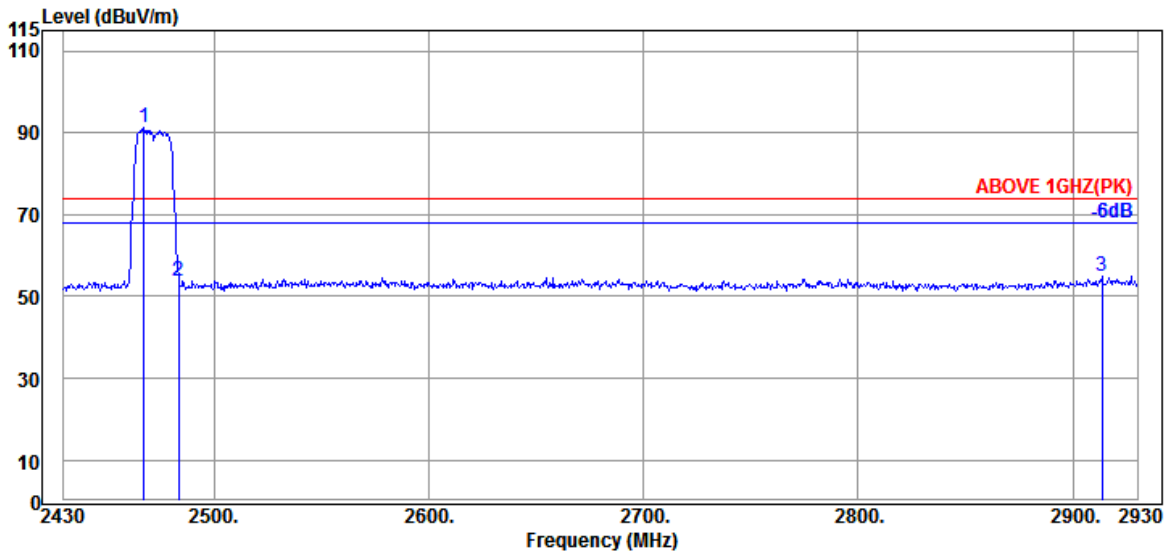

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	27.89	6.15	33.13	90.23	91.14	---	---	Peak
2483.500	28.01	6.18	33.11	52.55	53.63	74.00	20.37	Peak
2913.500	29.20	6.75	32.81	51.88	55.02	74.00	18.98	Peak

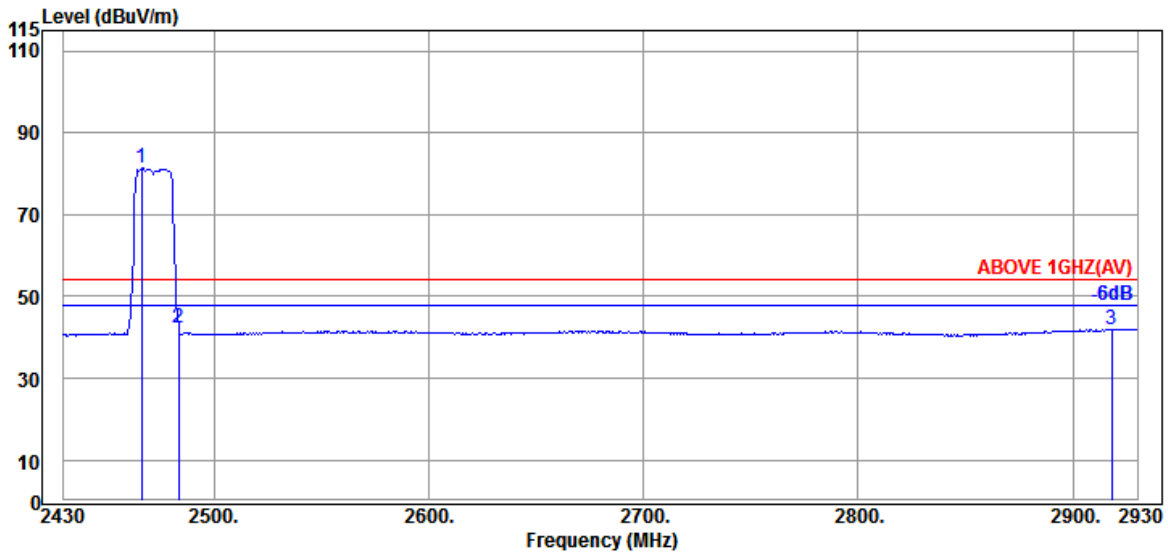


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	27.89	6.15	33.13	80.37	81.28	---	---	Average
2483.500	28.01	6.18	33.11	41.33	42.41	54.00	11.59	Average
2918.000	29.20	6.75	32.80	38.86	42.01	54.00	11.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

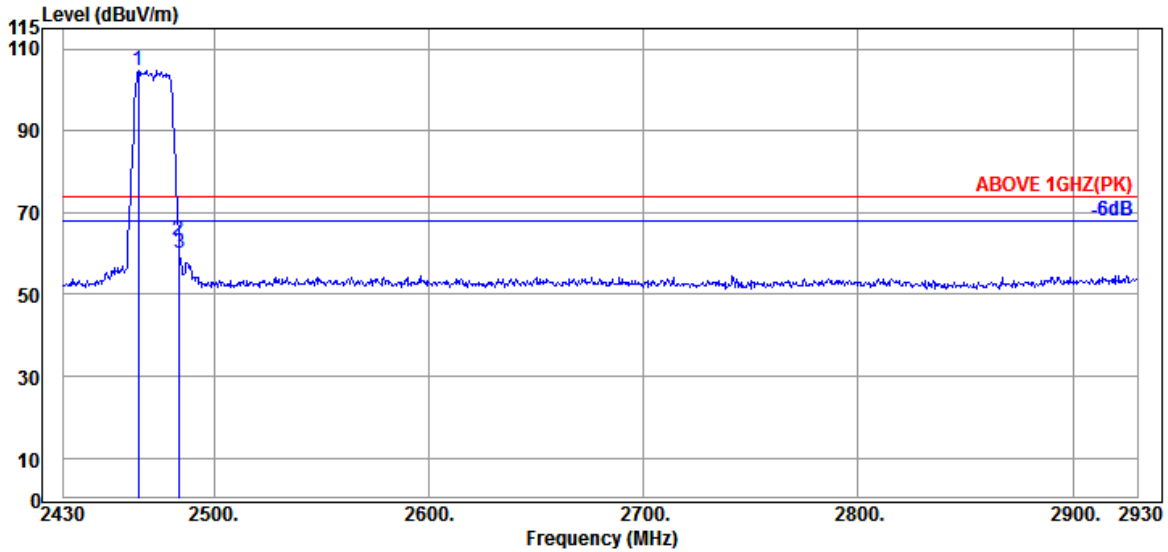

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	27.89	6.15	33.13	103.98	104.89	---	---	Peak
2483.500	28.01	6.18	33.11	62.32	63.40	74.00	10.60	Peak
2484.000	28.01	6.18	33.11	59.14	60.22	74.00	13.78	Peak

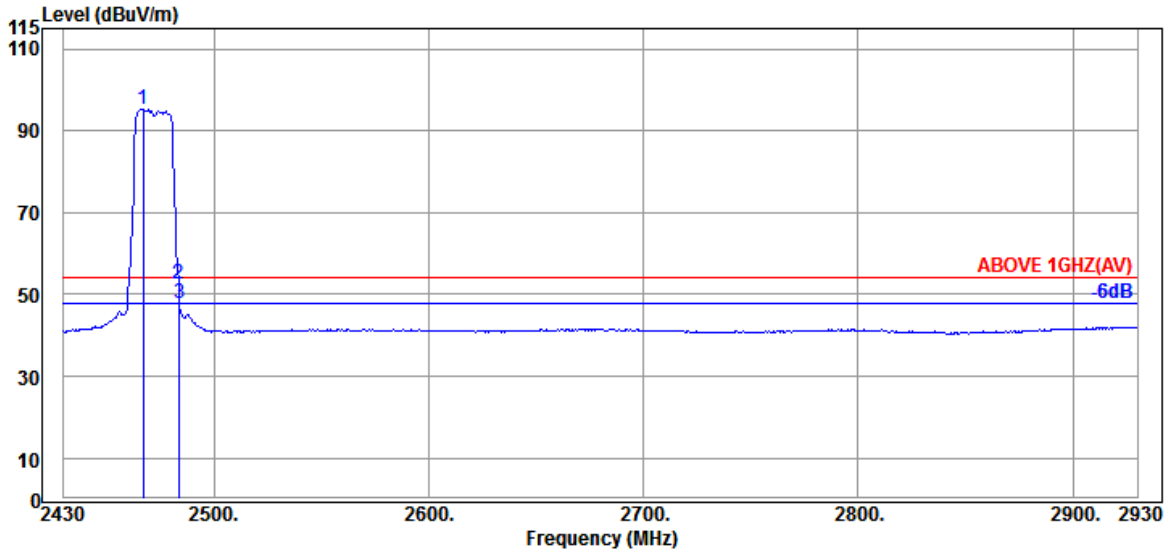


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	27.89	6.15	33.13	94.31	95.22	---	---	Average
2483.500	28.01	6.18	33.11	51.39	52.47	54.00	1.53	Average
2484.000	28.01	6.18	33.11	46.91	47.99	54.00	6.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

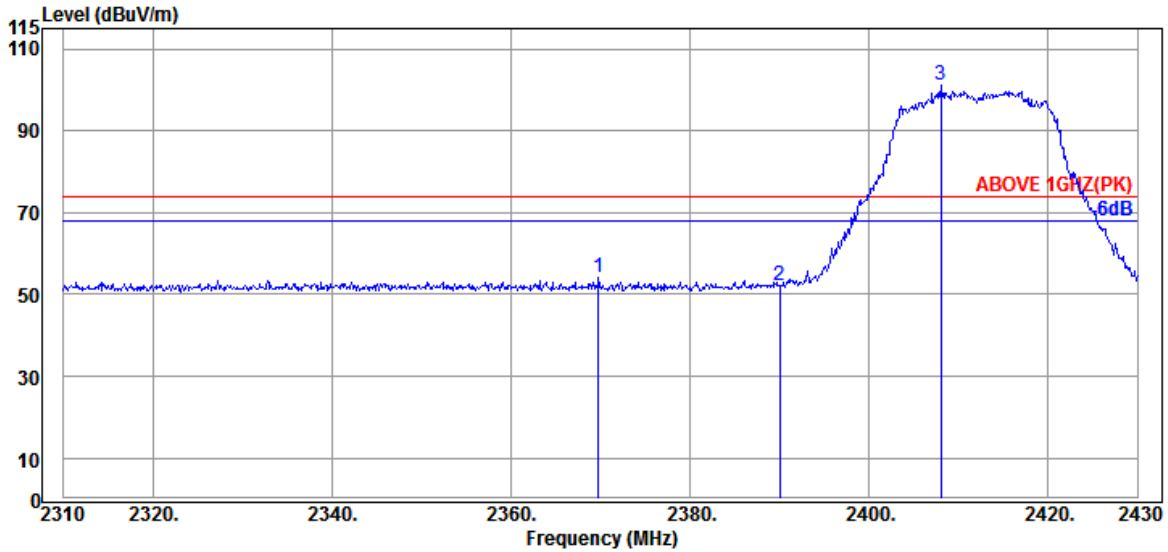

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2369.760	27.54	6.01	33.21	53.62	53.96	74.00	20.04	Peak
2390.040	27.57	6.04	33.19	51.76	52.18	74.00	21.82	Peak
@ 2408.040	27.63	6.07	33.18	100.62	101.14	---	---	Peak

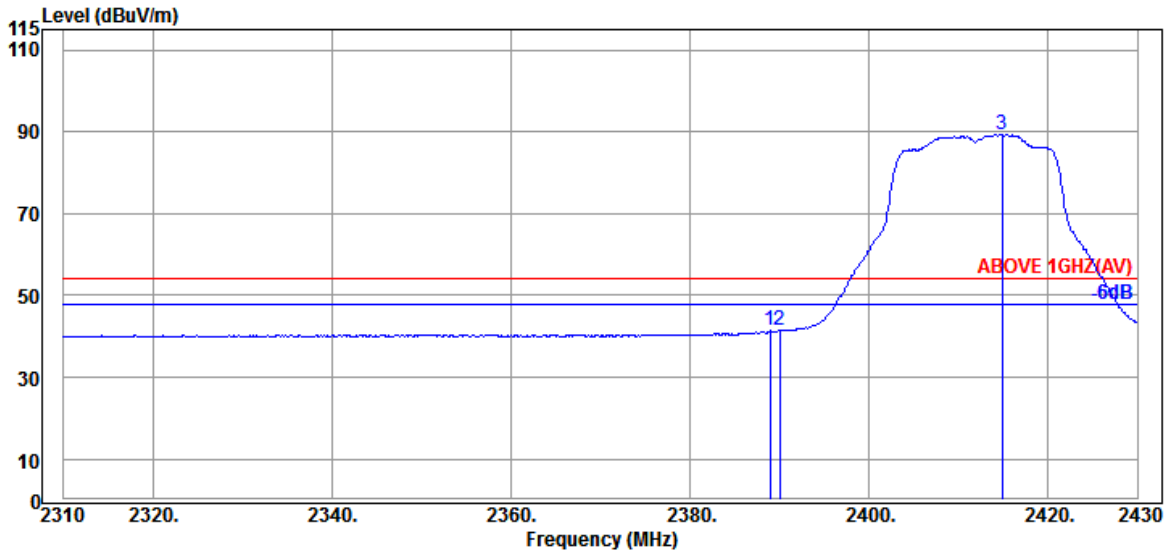


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	27.57	6.04	33.19	40.89	41.31	54.00	12.69	Average
2390.040	27.57	6.04	33.19	40.99	41.41	54.00	12.59	Average
@ 2414.880	27.66	6.07	33.17	88.76	89.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

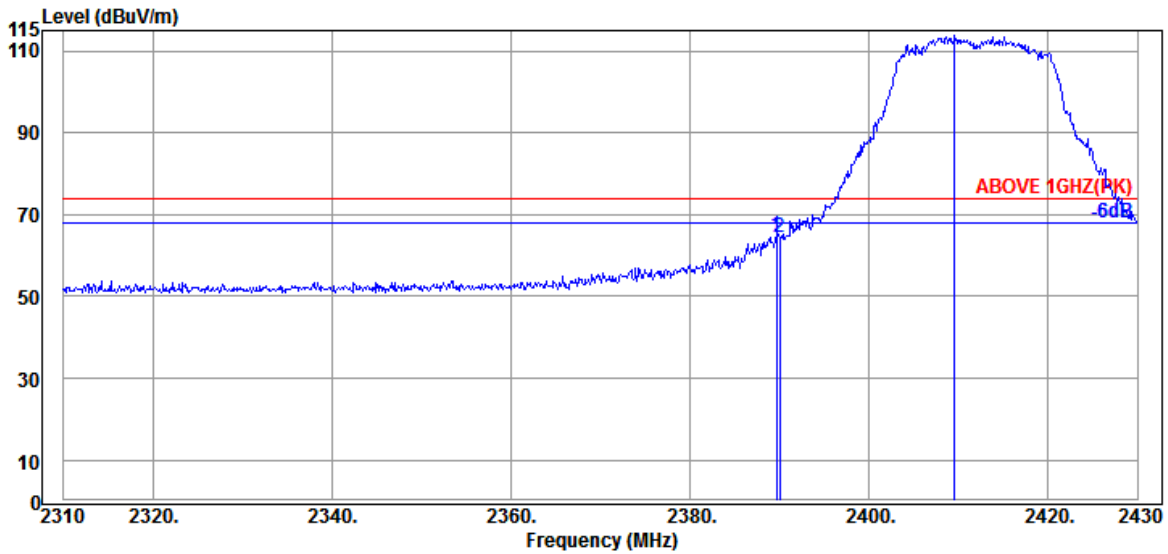

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	64.31	64.73	74.00	9.27	Peak
2390.040	27.57	6.04	33.19	63.87	64.29	74.00	9.71	Peak
@ 2409.600	27.63	6.07	33.18	113.21	113.73	---	---	Peak

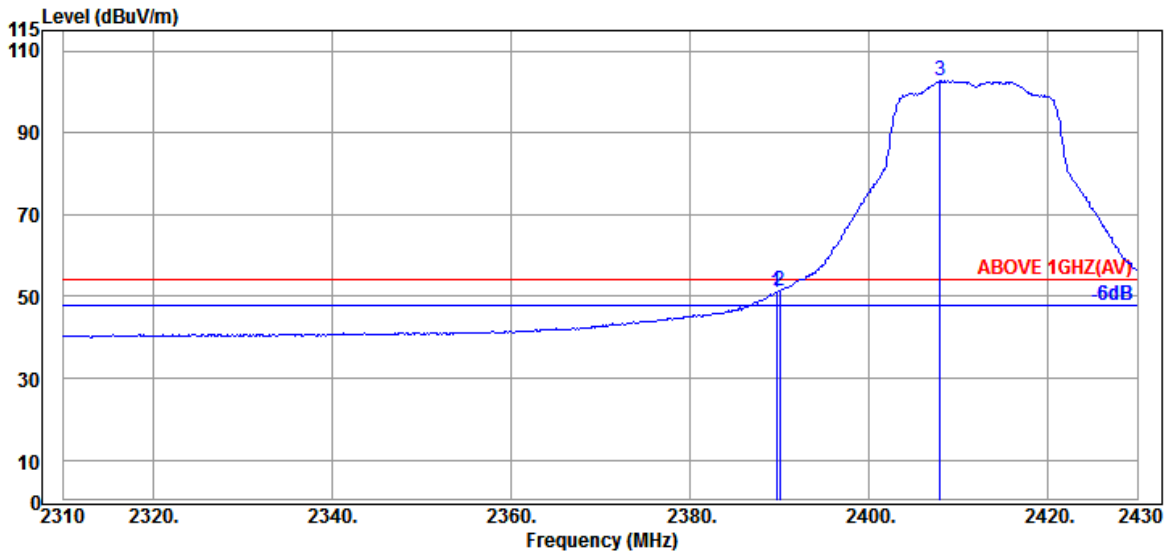


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	50.41	50.83	54.00	3.17	Average
2390.040	27.57	6.04	33.19	50.86	51.28	54.00	2.72	Average
@ 2407.920	27.63	6.07	33.18	102.08	102.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

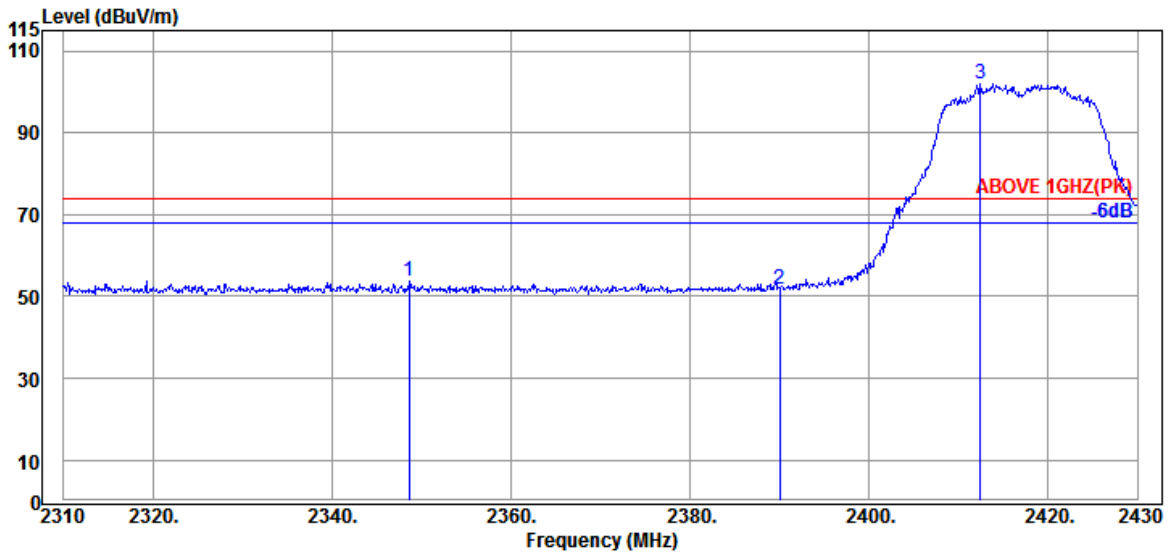

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2348.640	27.50	5.96	33.23	53.45	53.68	74.00	20.32	Peak
2390.040	27.57	6.04	33.19	51.42	51.84	74.00	22.16	Peak
@ 2412.480	27.66	6.07	33.17	101.57	102.13	---	---	Peak

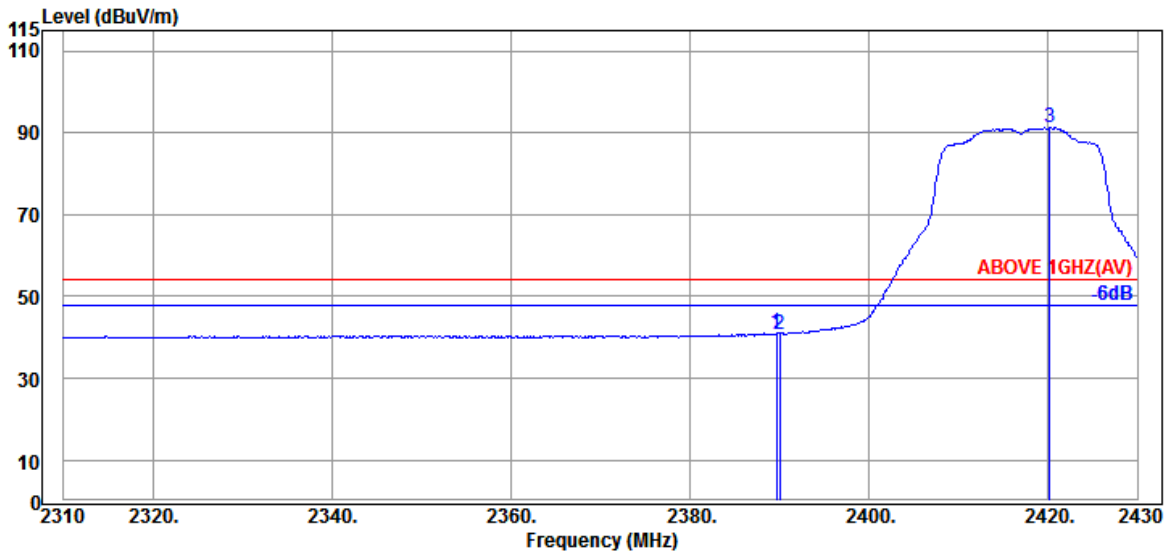


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	27.57	6.04	33.19	40.64	41.06	54.00	12.94	Average
2390.040	27.57	6.04	33.19	40.48	40.90	54.00	13.10	Average
@ 2420.160	27.69	6.10	33.17	90.64	91.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

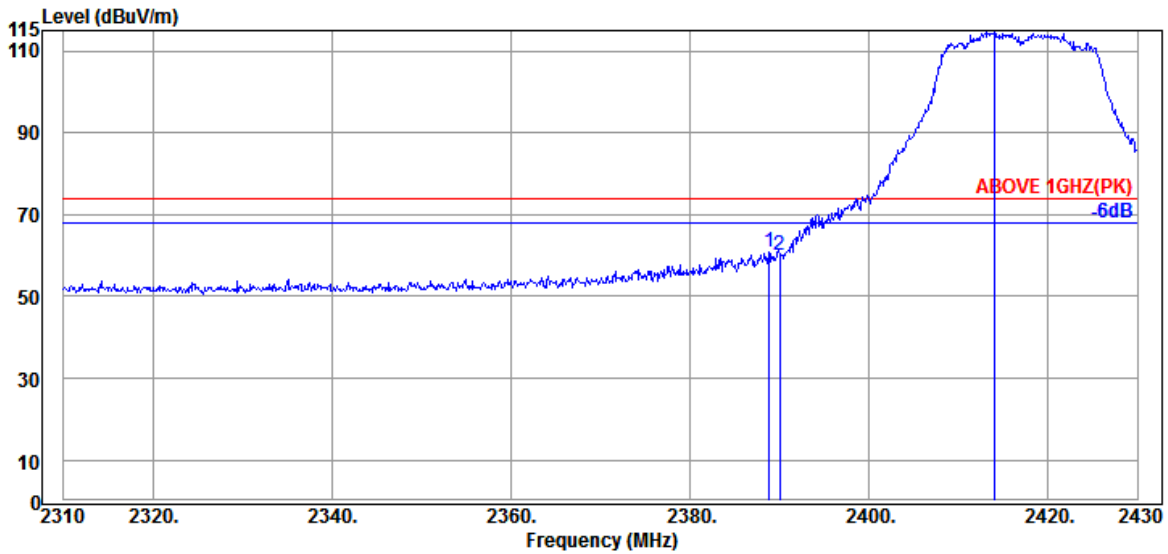

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	27.57	6.04	33.19	60.60	61.02	74.00	12.98	Peak
2390.040	27.57	6.04	33.19	59.71	60.13	74.00	13.87	Peak
@ 2414.040	27.66	6.07	33.17	114.11	114.67	---	---	Peak

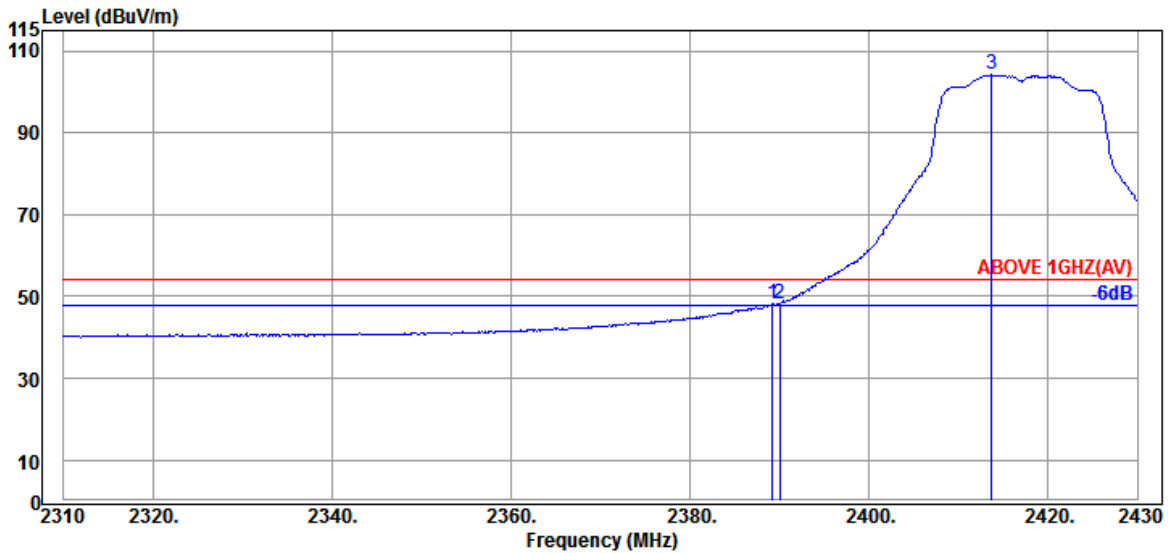


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	27.57	6.04	33.19	47.78	48.20	54.00	5.80	Average
2390.040	27.57	6.04	33.19	47.96	48.38	54.00	5.62	Average
@ 2413.680	27.66	6.07	33.17	103.57	104.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

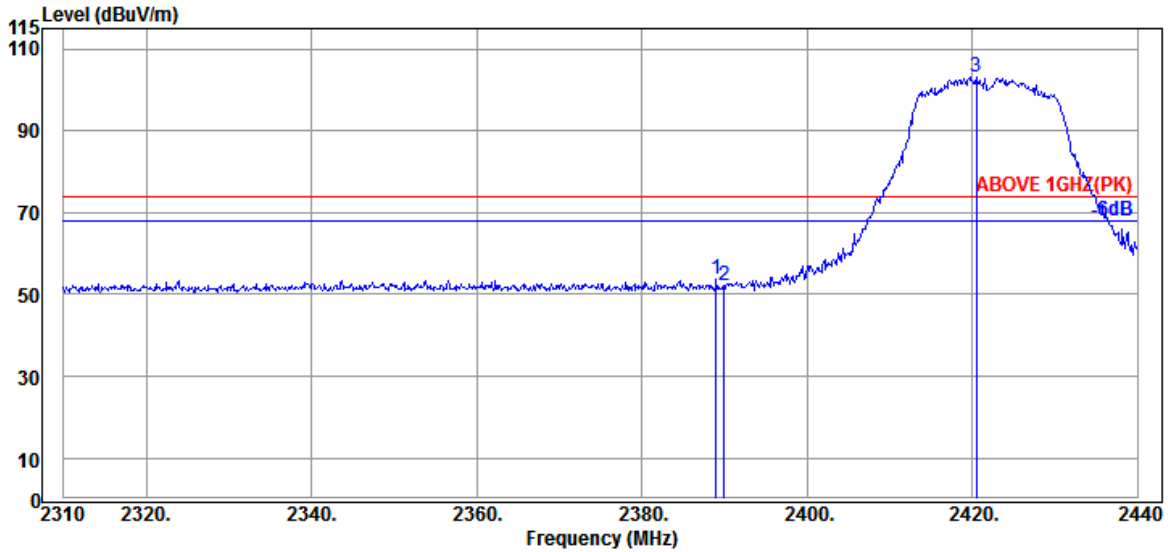

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.040	27.57	6.04	33.19	53.25	53.67	74.00	20.33	Peak
2389.950	27.57	6.04	33.19	51.79	52.21	74.00	21.79	Peak
@ 2420.500	27.69	6.10	33.17	102.62	103.24	---	---	Peak

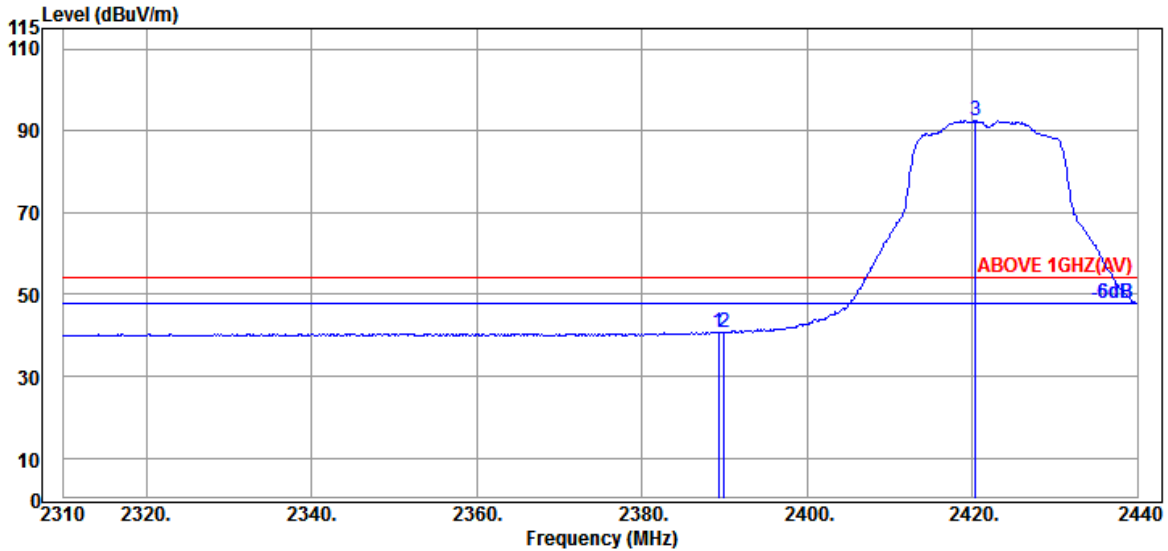


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.300	27.57	6.04	33.19	40.39	40.81	54.00	13.19	Average
2389.950	27.57	6.04	33.19	40.30	40.72	54.00	13.28	Average
@ 2420.370	27.69	6.10	33.17	91.87	92.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

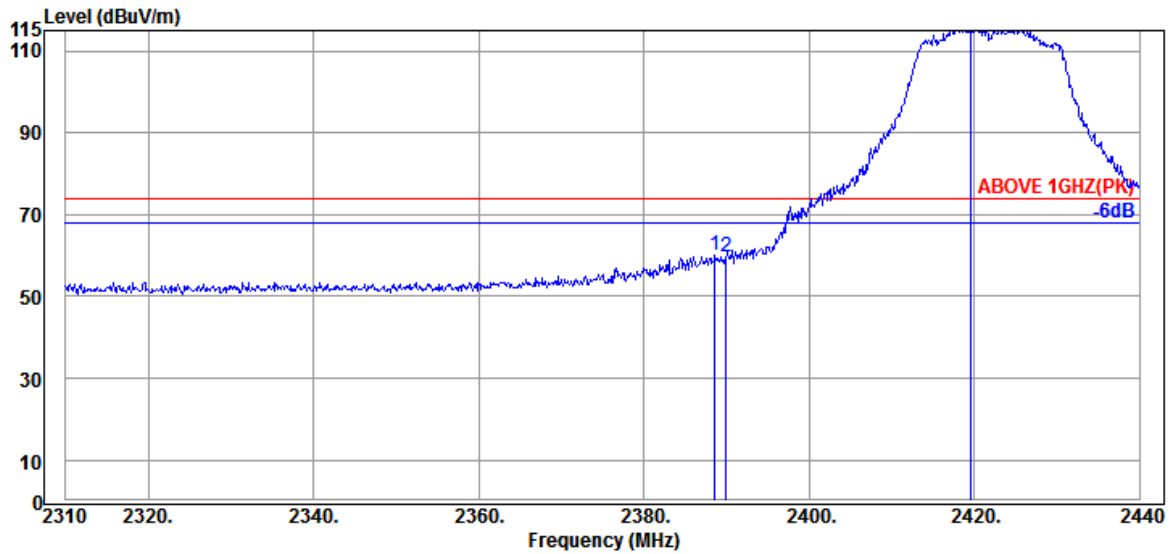

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.650	27.57	6.04	33.19	59.67	60.09	74.00	13.91	Peak
2389.950	27.57	6.04	33.19	59.24	59.66	74.00	14.34	Peak
@ 2419.590	27.69	6.10	33.17	115.63	116.25	---	---	Peak

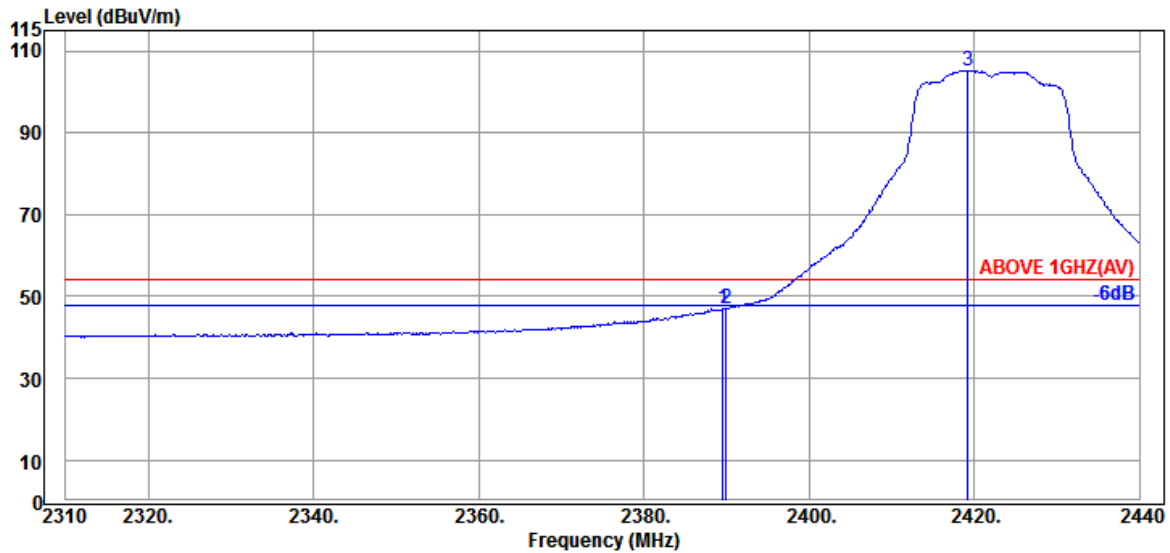


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	46.51	46.93	54.00	7.07	Average
2389.950	27.57	6.04	33.19	46.54	46.96	54.00	7.04	Average
@ 2419.200	27.69	6.07	33.17	104.59	105.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

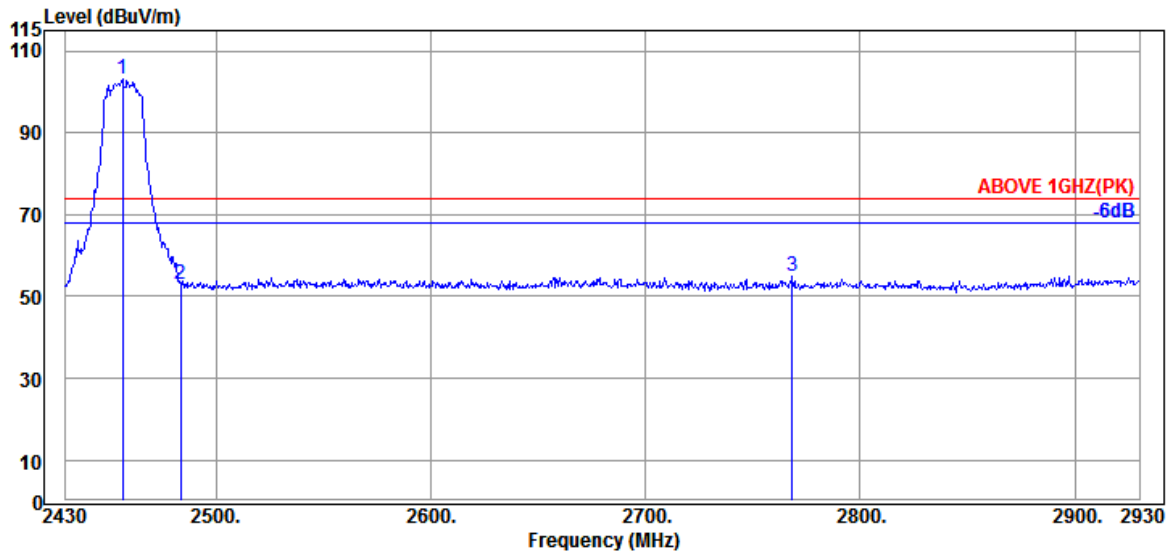

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	27.84	6.15	33.14	102.22	103.07	---	---	Peak
2483.500	28.01	6.18	33.11	52.06	53.14	74.00	20.86	Peak
2768.500	28.87	6.56	32.90	52.40	54.93	74.00	19.07	Peak

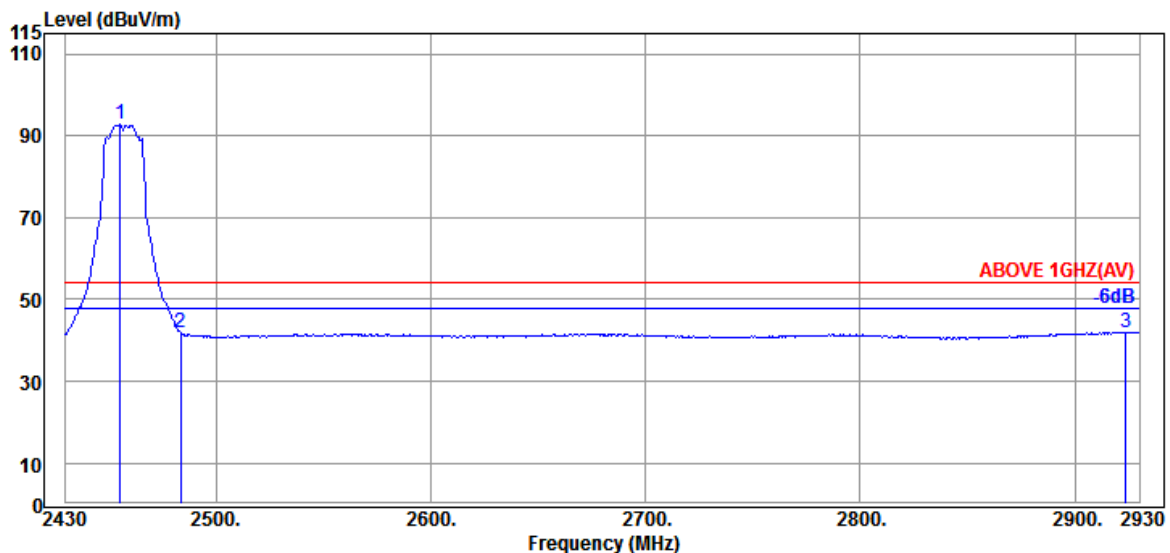


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	27.84	6.15	33.14	92.12	92.97	---	---	Average
2483.500	28.01	6.18	33.11	40.77	41.85	54.00	12.15	Average
2923.500	29.20	6.75	32.80	38.87	42.02	54.00	11.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

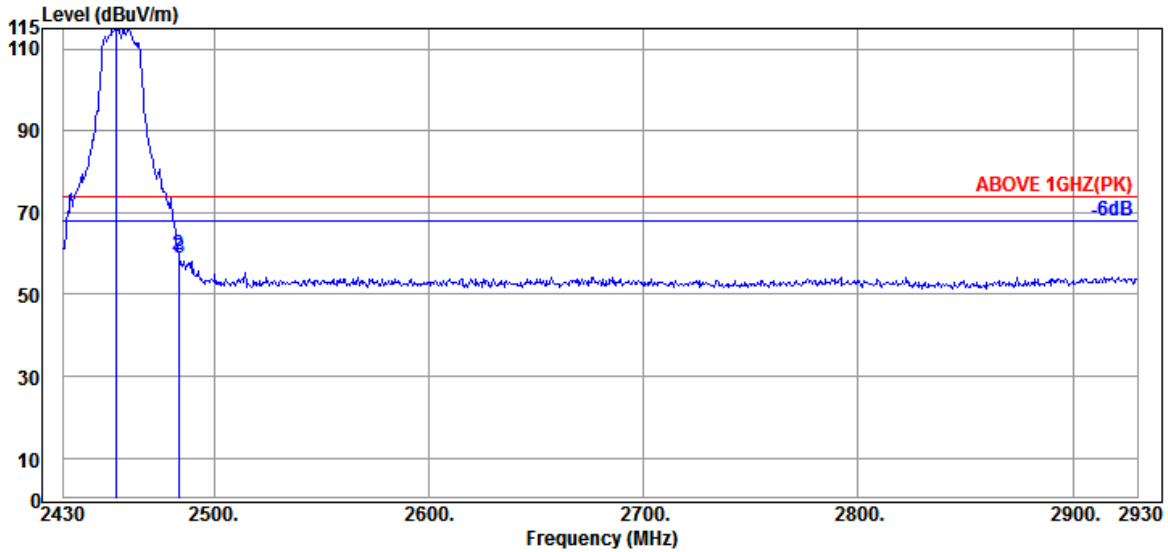

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.500	27.84	6.15	33.14	114.60	115.45	---	---	Peak
2483.500	28.01	6.18	33.11	58.73	59.81	74.00	14.19	Peak
2484.000	28.01	6.18	33.11	57.79	58.87	74.00	15.13	Peak

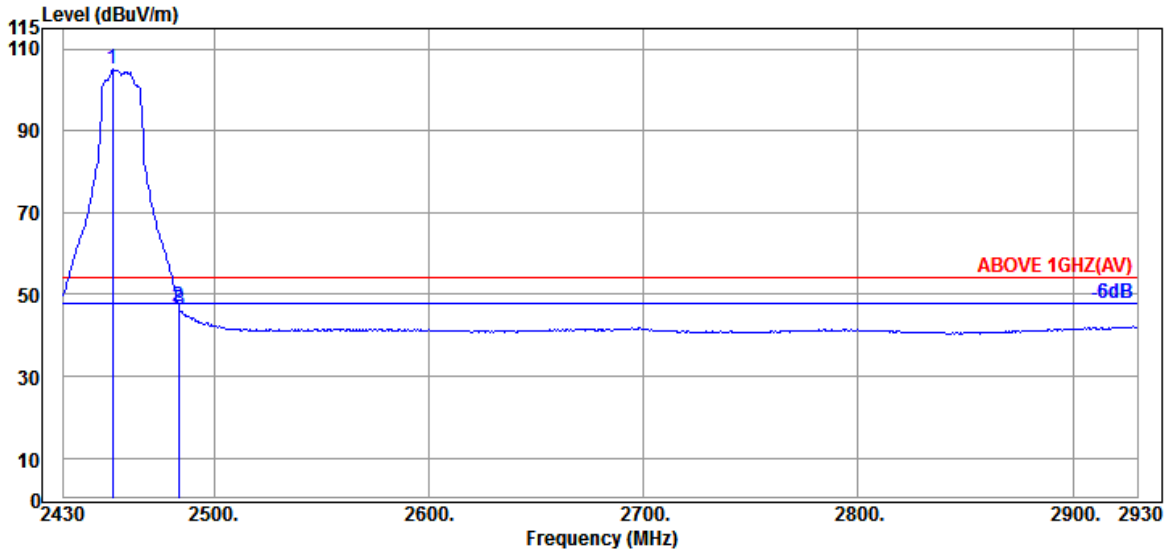


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.000	27.80	6.13	33.14	104.20	104.99	---	---	Average
2483.500	28.01	6.18	33.11	45.93	47.01	54.00	6.99	Average
2484.000	28.01	6.18	33.11	45.26	46.34	54.00	7.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

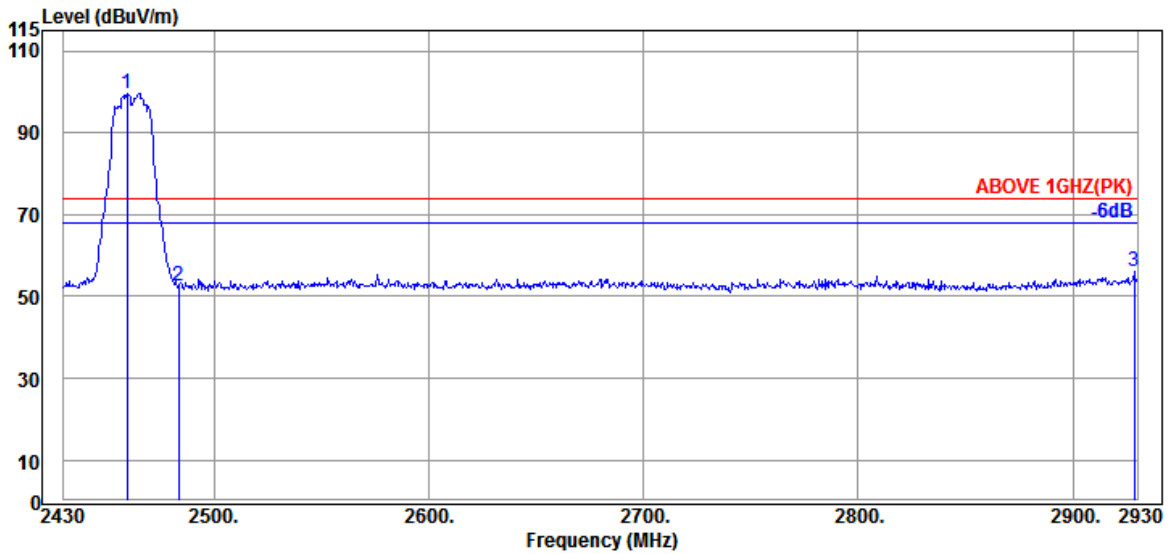

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	98.87	99.73	---	---	Peak
2483.500	28.01	6.18	33.11	51.63	52.71	74.00	21.29	Peak
2928.500	29.20	6.75	32.79	52.79	55.95	74.00	18.05	Peak

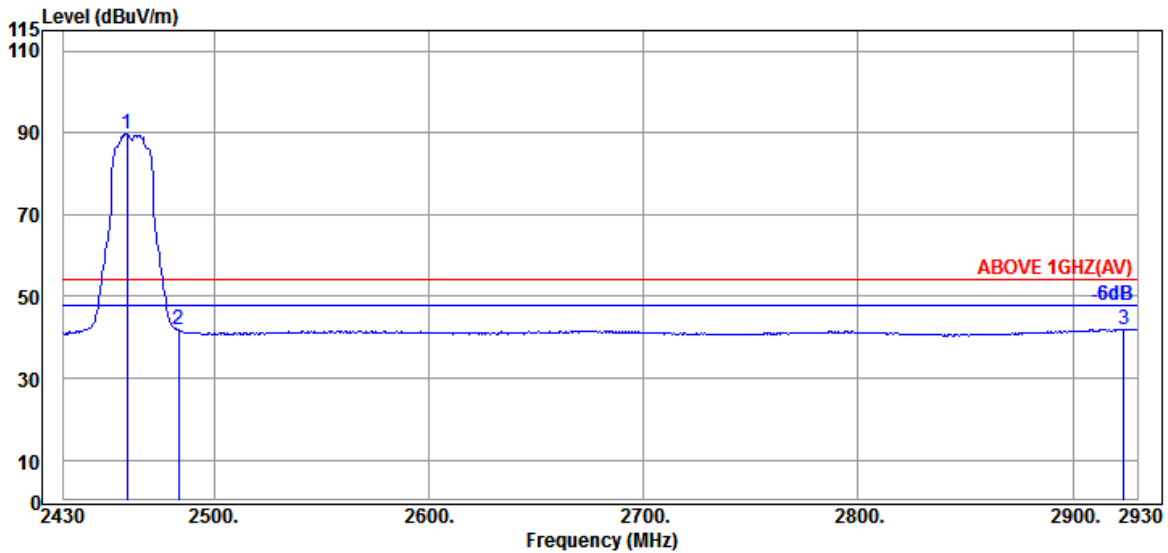


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	88.88	89.74	---	---	Average
2483.500	28.01	6.18	33.11	40.87	41.95	54.00	12.05	Average
2923.500	29.20	6.75	32.80	38.83	41.98	54.00	12.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

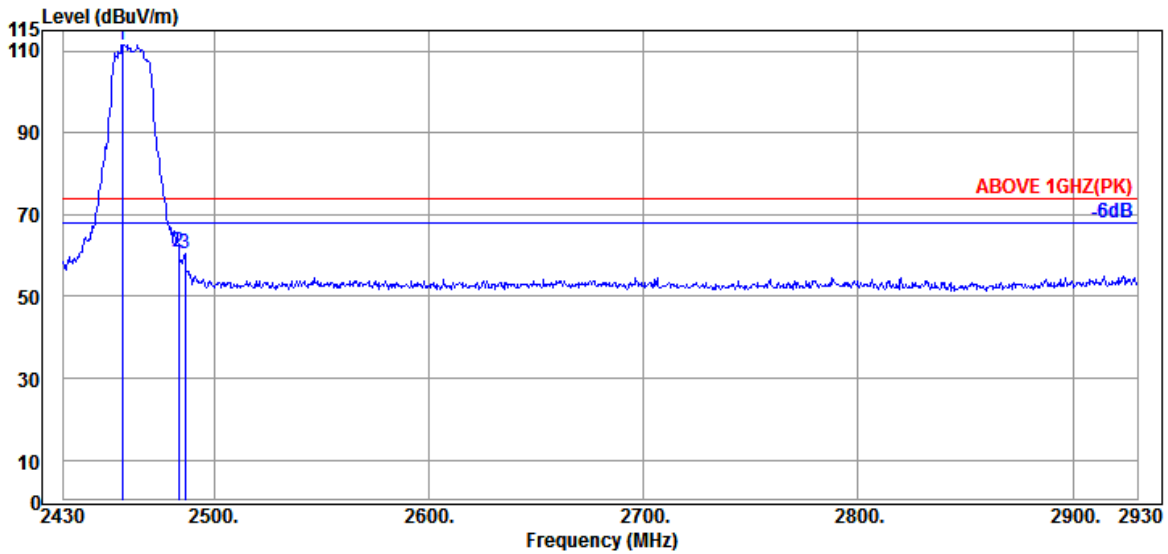

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.500	27.84	6.15	33.14	110.74	111.59	---	---	Peak
2483.500	28.01	6.18	33.11	59.78	60.86	74.00	13.14	Peak
2486.500	28.01	6.18	33.11	59.33	60.41	74.00	13.59	Peak

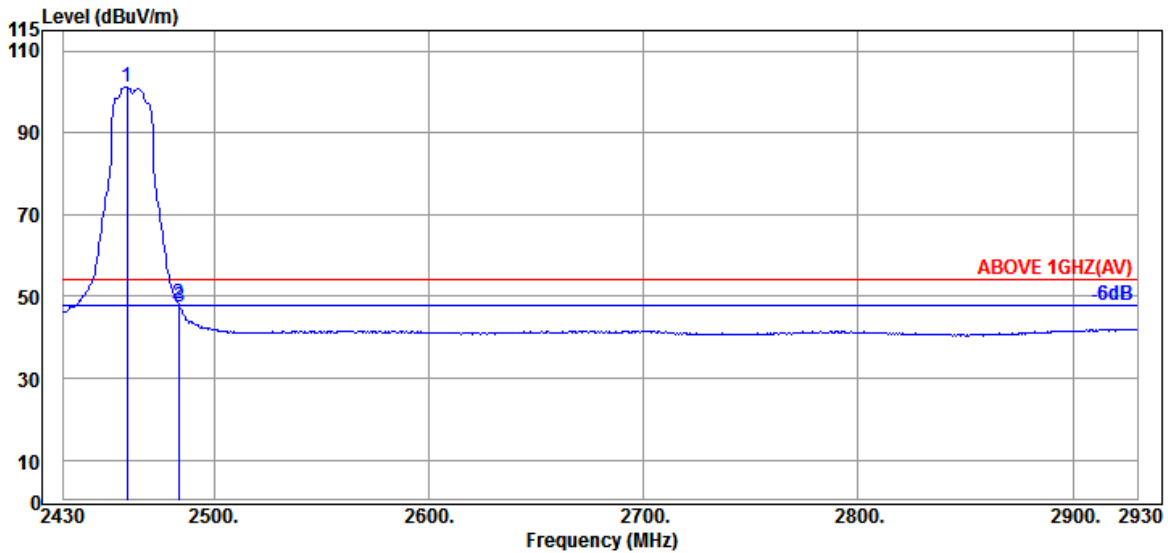


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	100.38	101.24	---	---	Average
2483.500	28.01	6.18	33.11	47.06	48.14	54.00	5.86	Average
2484.000	28.01	6.18	33.11	46.37	47.45	54.00	6.55	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

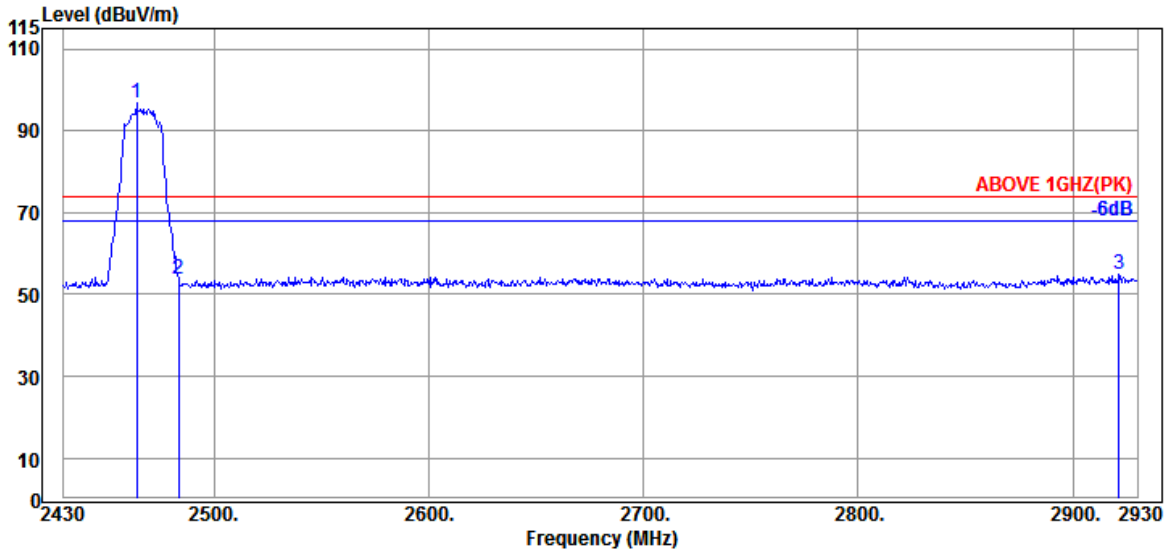

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.000	27.89	6.15	33.13	95.84	96.75	---	---	Peak
2483.500	28.01	6.18	33.11	52.57	53.65	74.00	20.35	Peak
2921.500	29.20	6.75	32.80	51.83	54.98	74.00	19.02	Peak

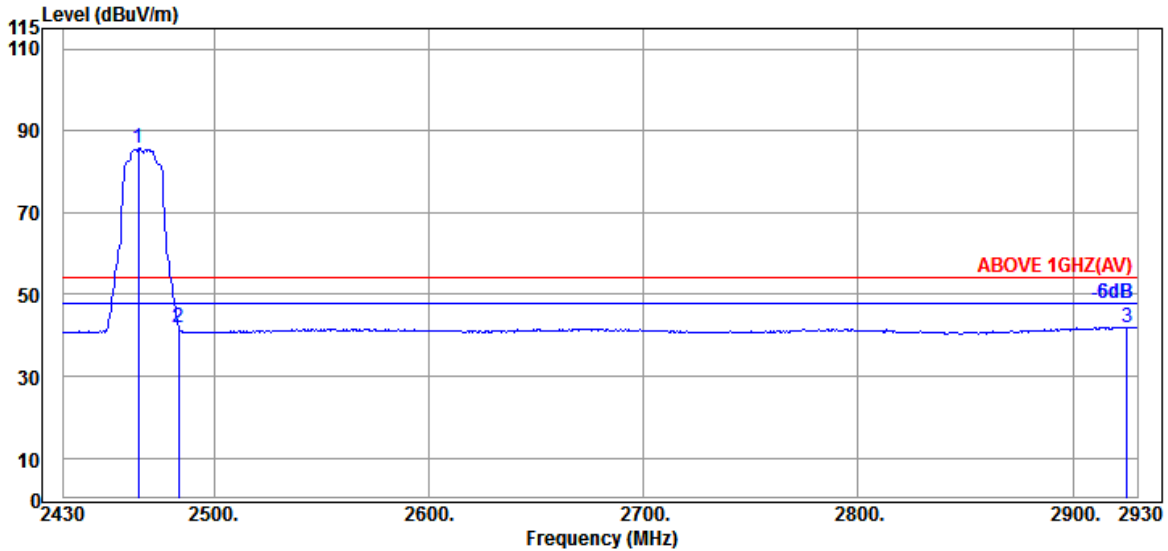


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.000	27.89	6.15	33.13	84.80	85.71	---	---	Average
2483.500	28.01	6.18	33.11	40.87	41.95	54.00	12.05	Average
2925.000	29.20	6.75	32.79	38.91	42.07	54.00	11.93	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

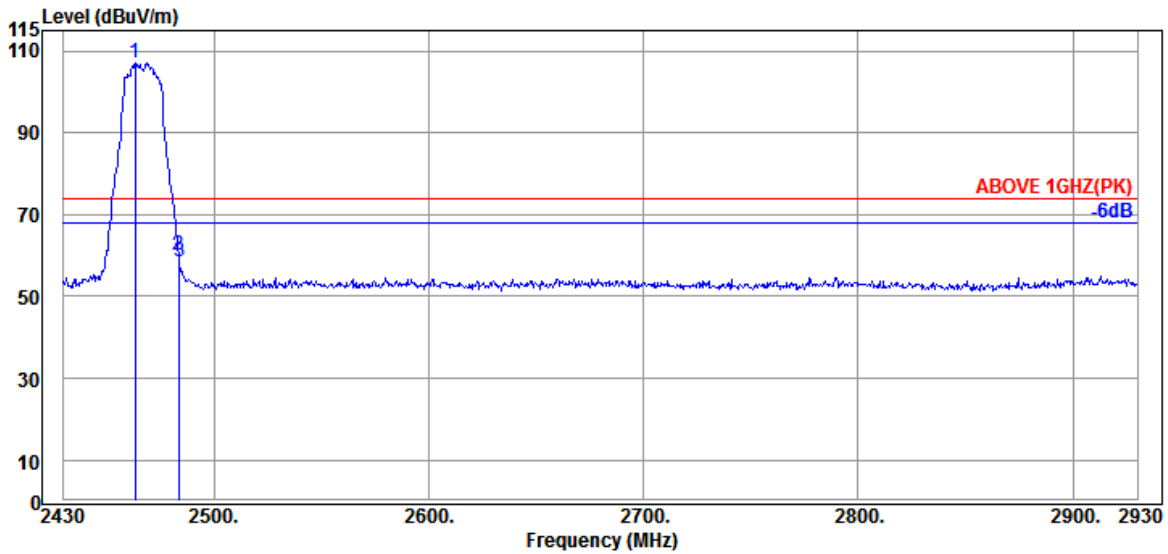

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	27.89	6.15	33.13	106.38	107.29	---	---	Peak
2483.500	28.01	6.18	33.11	58.83	59.91	74.00	14.09	Peak
2484.000	28.01	6.18	33.11	57.53	58.61	74.00	15.39	Peak

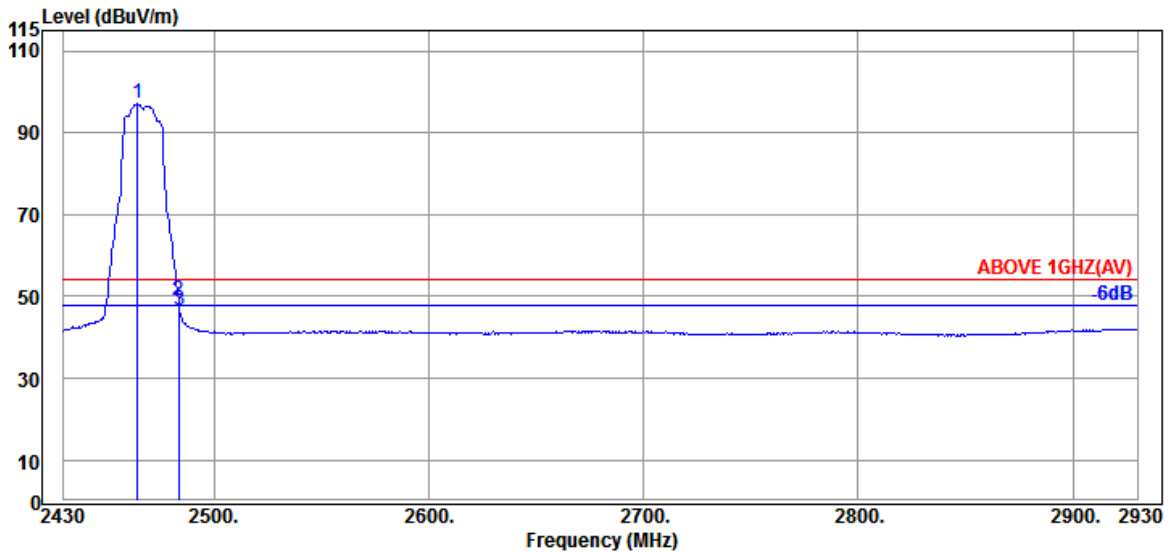


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	27.89	6.15	33.13	96.16	97.07	---	---	Average
2483.500	28.01	6.18	33.11	47.73	48.81	54.00	5.19	Average
2484.000	28.01	6.18	33.11	45.60	46.68	54.00	7.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

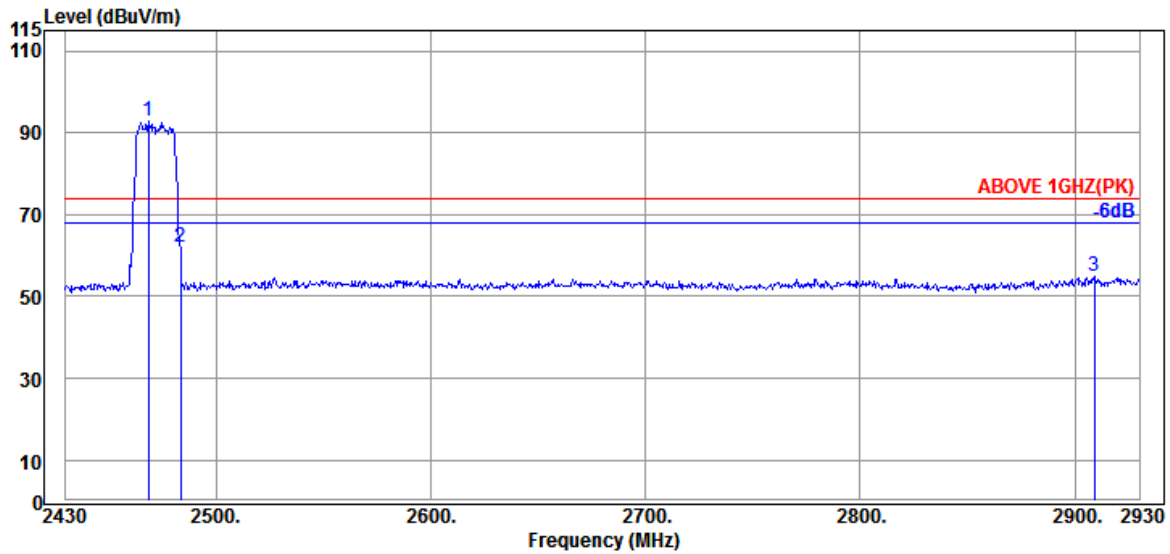

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.500	27.93	6.15	33.13	91.89	92.84	---	---	Peak
2483.500	28.01	6.18	33.11	60.83	61.91	74.00	12.09	Peak
2909.000	29.20	6.73	32.81	51.71	54.83	74.00	19.17	Peak

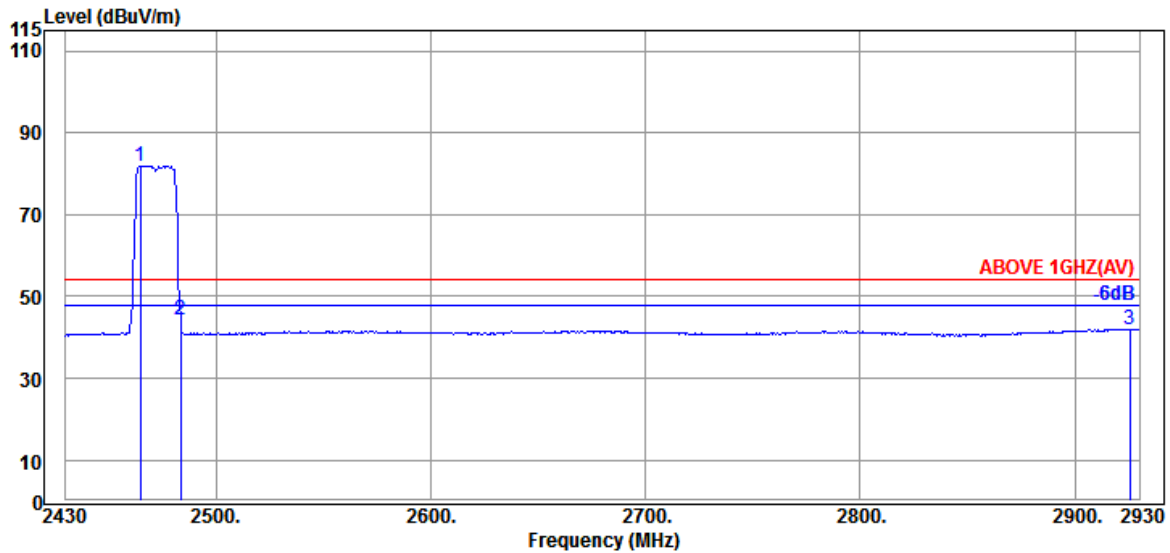


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.000	27.89	6.15	33.13	81.04	81.95	---	---	Average
2483.500	28.01	6.18	33.11	43.06	44.14	54.00	9.86	Average
2925.500	29.20	6.75	32.79	38.78	41.94	54.00	12.06	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

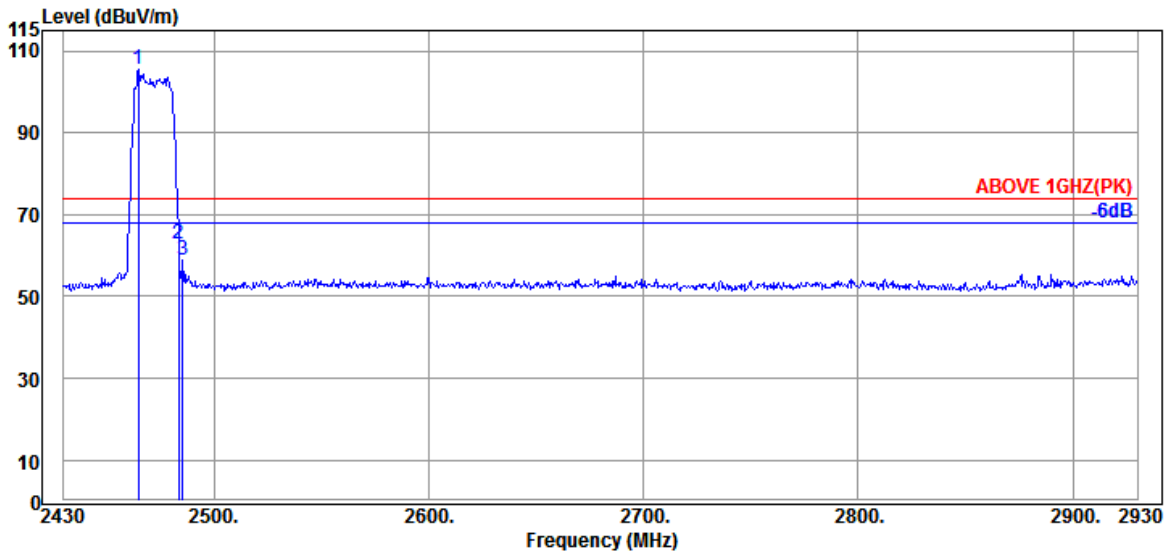

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	27.89	6.15	33.13	104.55	105.46	---	---	Peak
2483.500	28.01	6.18	33.11	61.79	62.87	74.00	11.13	Peak
2485.500	28.01	6.18	33.11	57.93	59.01	74.00	14.99	Peak

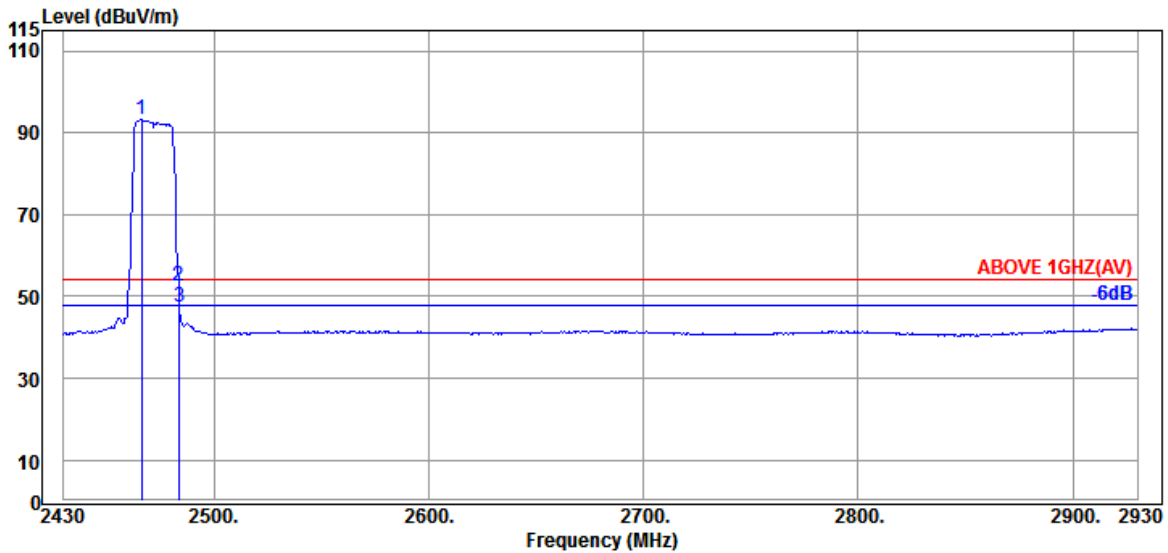


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	27.89	6.15	33.13	92.42	93.33	---	---	Average
2483.500	28.01	6.18	33.11	51.40	52.48	54.00	1.52	Average
2484.000	28.01	6.18	33.11	46.26	47.34	54.00	6.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

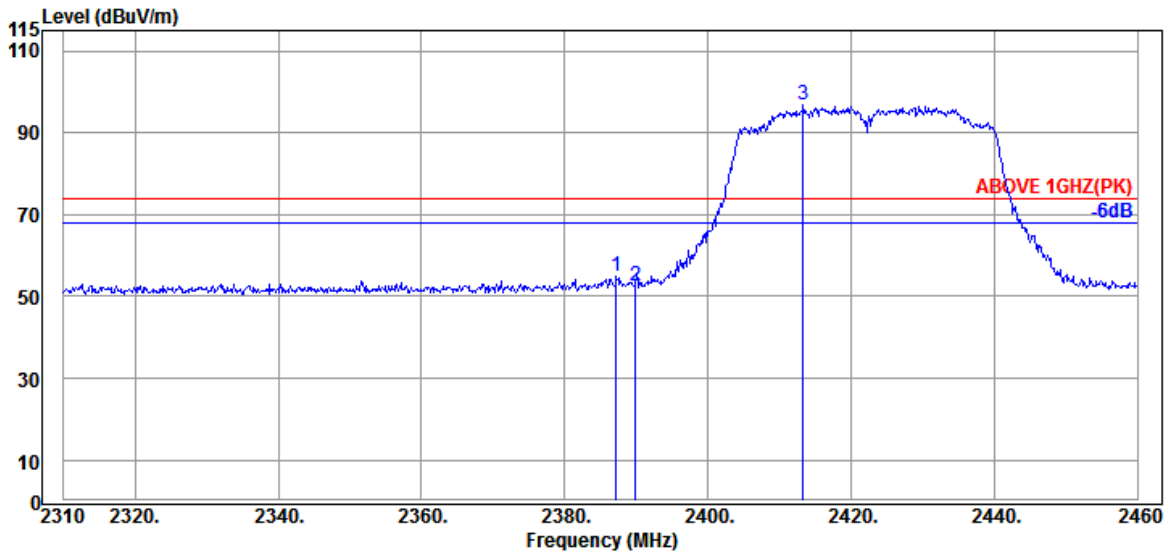

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2387.250	27.57	6.04	33.19	54.64	55.06	74.00	18.94	Peak
2389.950	27.57	6.04	33.19	52.23	52.65	74.00	21.35	Peak
@ 2413.350	27.66	6.07	33.17	96.08	96.64	---	---	Peak

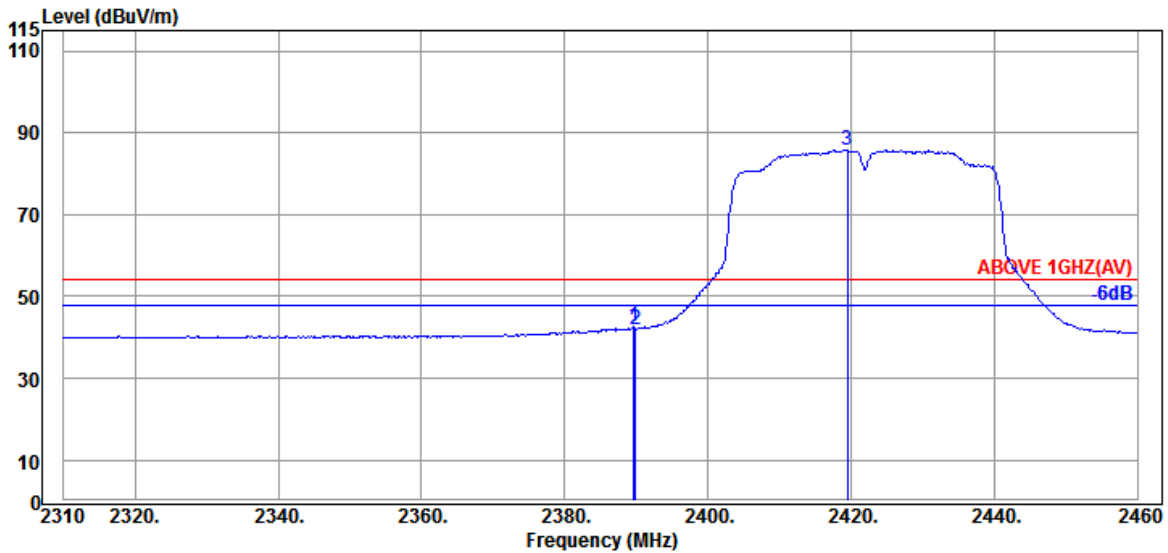


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	27.57	6.04	33.19	42.08	42.50	54.00	11.50	Average
2389.950	27.57	6.04	33.19	41.65	42.07	54.00	11.93	Average
@ 2419.500	27.69	6.10	33.17	85.29	85.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

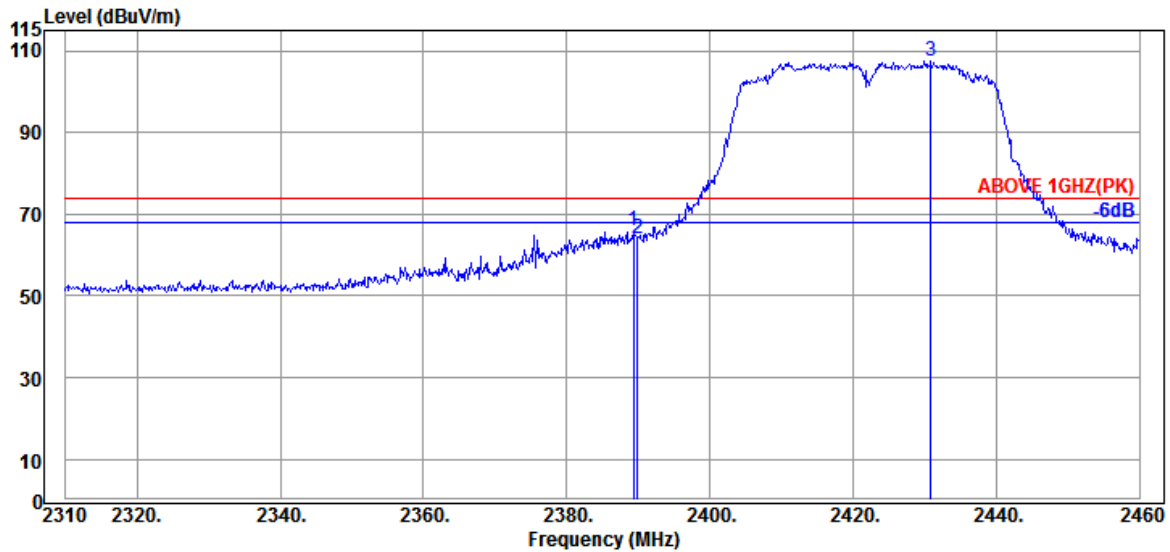

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	27.57	6.04	33.19	65.71	66.13	74.00	7.87	Peak
2389.950	27.57	6.04	33.19	63.47	63.89	74.00	10.11	Peak
@ 2430.900	27.71	6.10	33.16	106.98	107.63	---	---	Peak

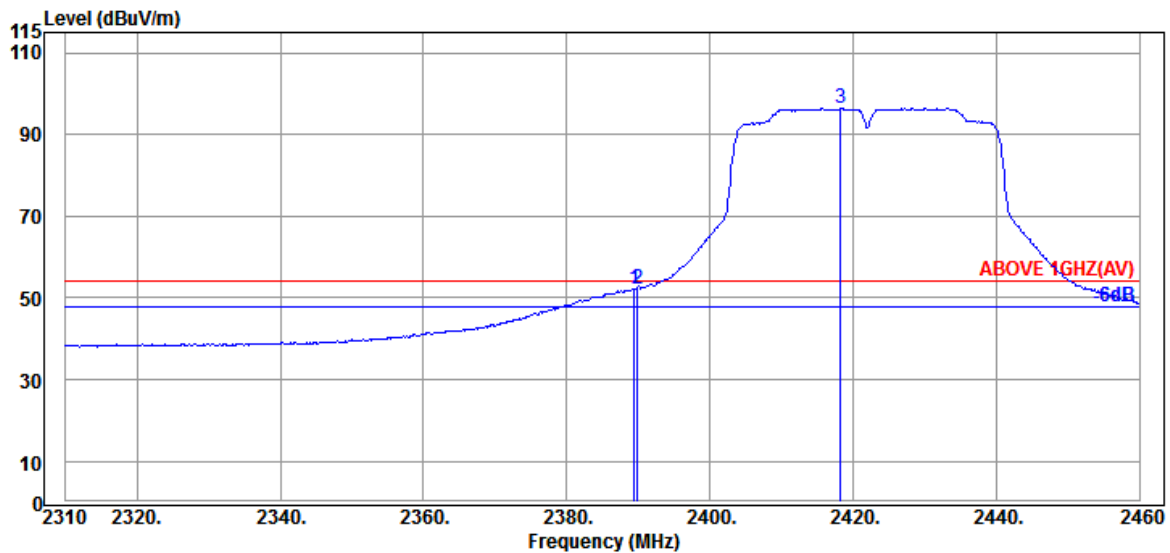


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	27.57	6.04	33.19	51.71	52.13	54.00	1.87	Average
2389.950	27.57	6.04	33.19	51.90	52.32	54.00	1.68	Average
@ 2418.300	27.69	6.07	33.17	95.97	96.56	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

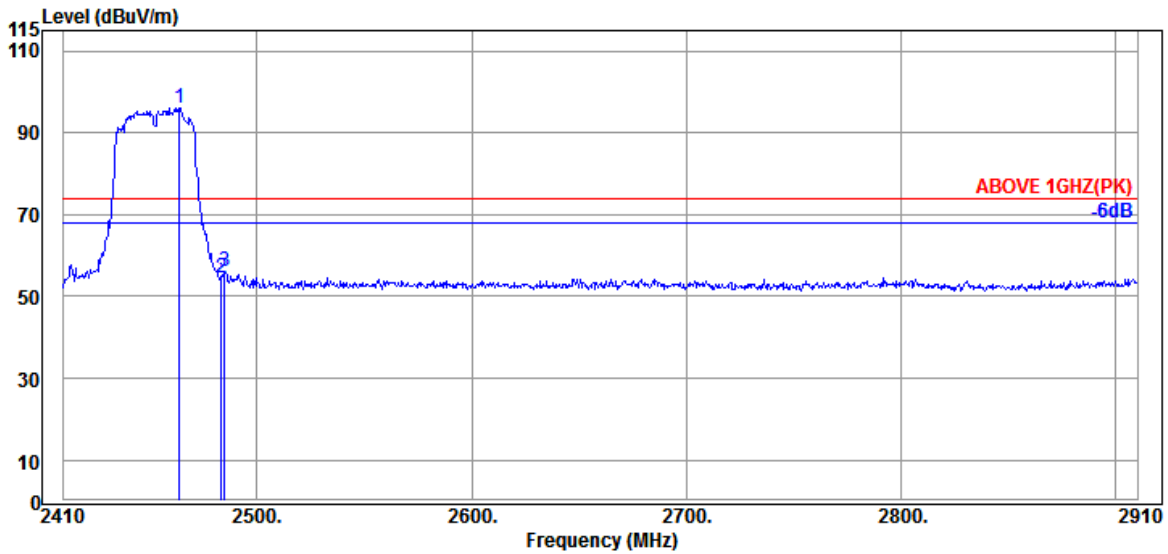

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	27.89	6.15	33.13	95.22	96.13	---	---	Peak
2483.500	28.01	6.18	33.11	53.33	54.41	74.00	19.59	Peak
2485.000	28.01	6.18	33.11	54.87	55.95	74.00	18.05	Peak

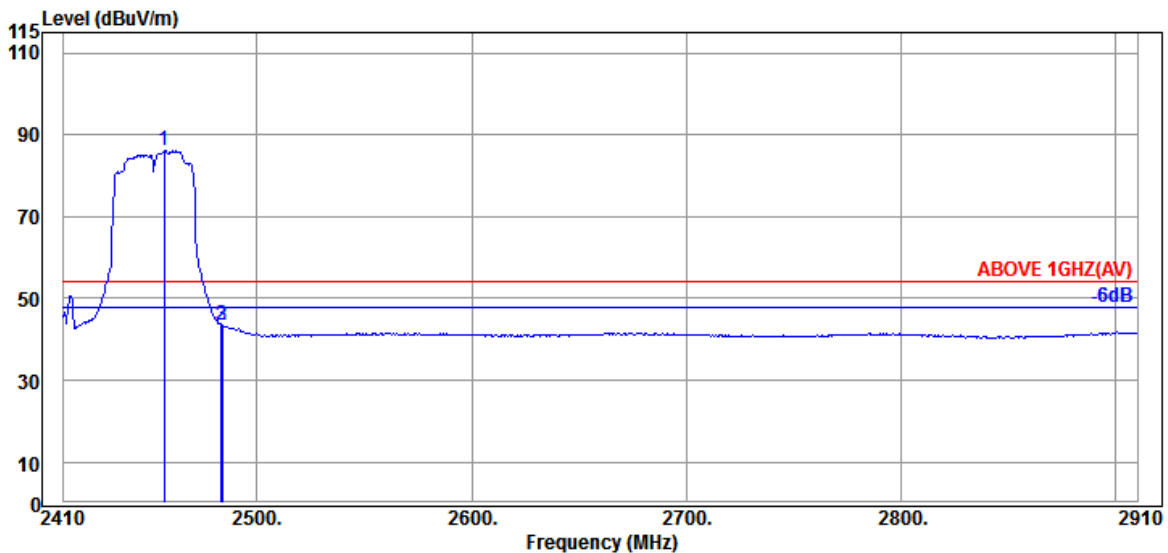


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.000	27.84	6.15	33.14	85.21	86.06	---	---	Average
2483.500	28.01	6.18	33.11	42.50	43.58	54.00	10.42	Average
2484.000	28.01	6.18	33.11	42.48	43.56	54.00	10.44	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

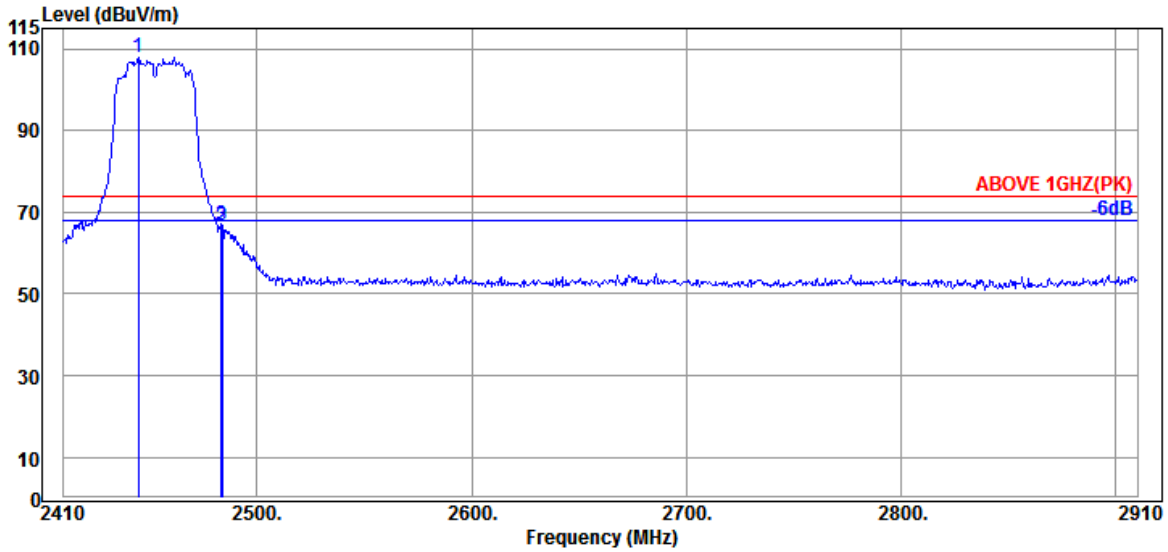

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.000	27.77	6.13	33.15	107.27	108.02	---	---	Peak
2483.500	28.01	6.18	33.11	65.27	66.35	74.00	7.65	Peak
2484.000	28.01	6.18	33.11	65.70	66.78	74.00	7.22	Peak

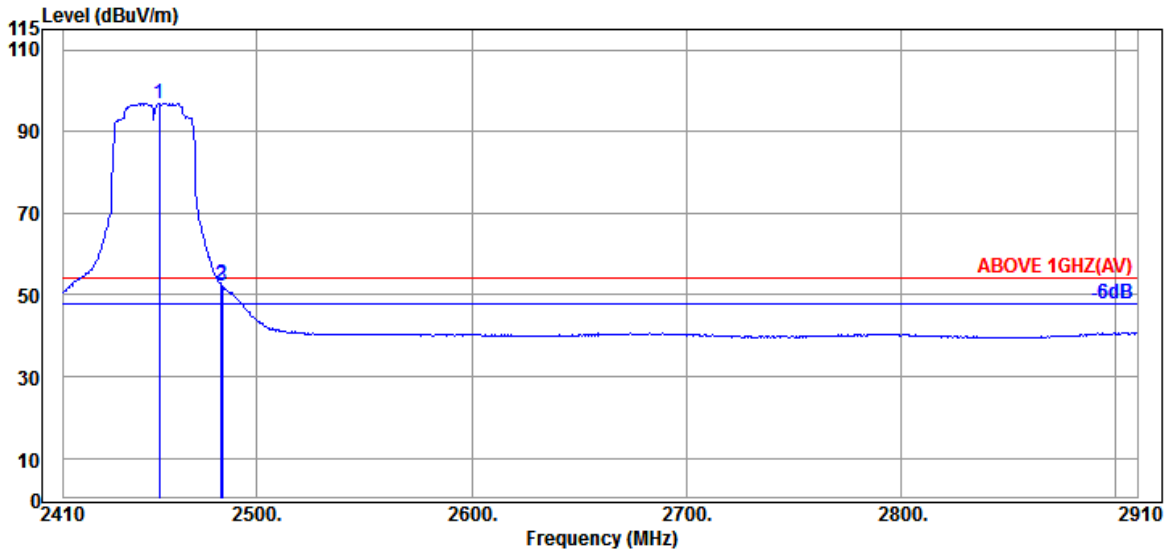


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	27.84	6.15	33.14	95.99	96.84	---	---	Average
2483.500	28.01	6.18	33.11	51.31	52.39	54.00	1.61	Average
2484.000	28.01	6.18	33.11	51.09	52.17	54.00	1.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

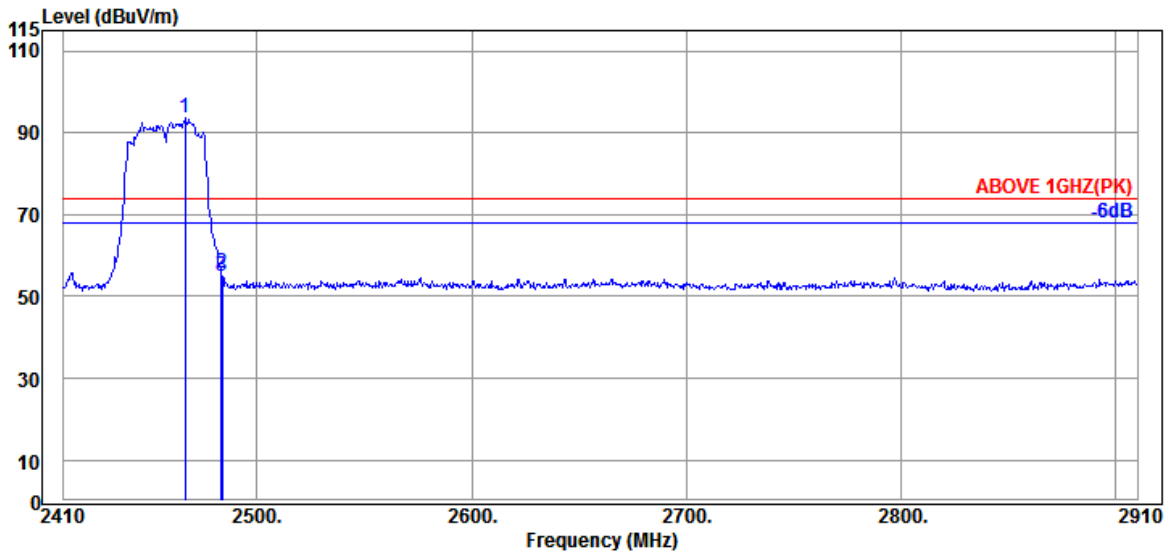

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.500	27.89	6.15	33.13	92.61	93.52	---	---	Peak
2483.500	28.01	6.18	33.11	54.81	55.89	74.00	18.11	Peak
2484.000	28.01	6.18	33.11	53.73	54.81	74.00	19.19	Peak

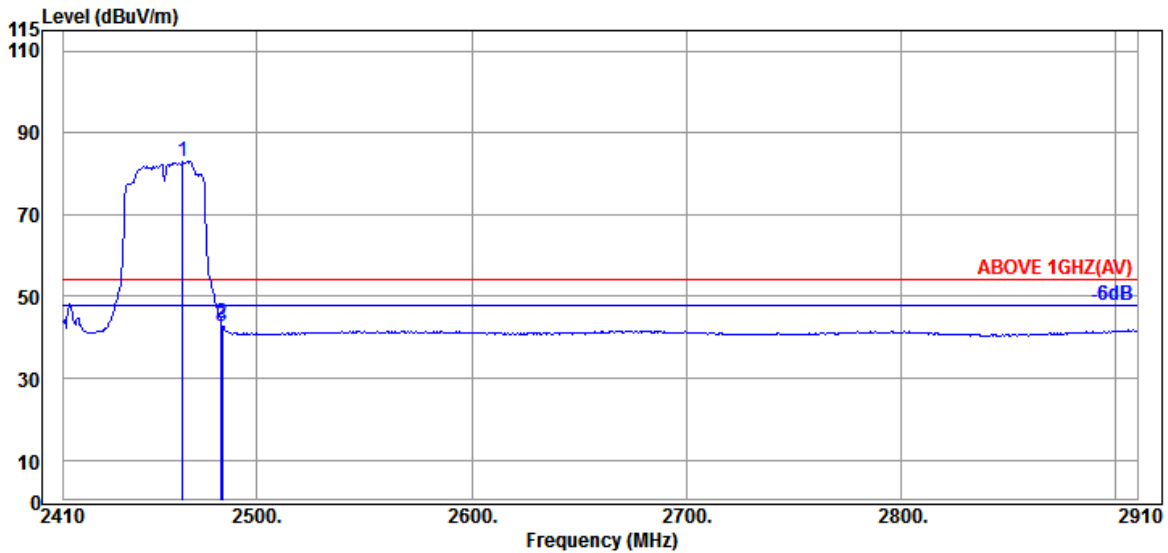


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.500	27.89	6.15	33.13	82.08	82.99	---	---	Average
2483.500	28.01	6.18	33.11	42.39	43.47	54.00	10.53	Average
2484.000	28.01	6.18	33.11	41.65	42.73	54.00	11.27	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

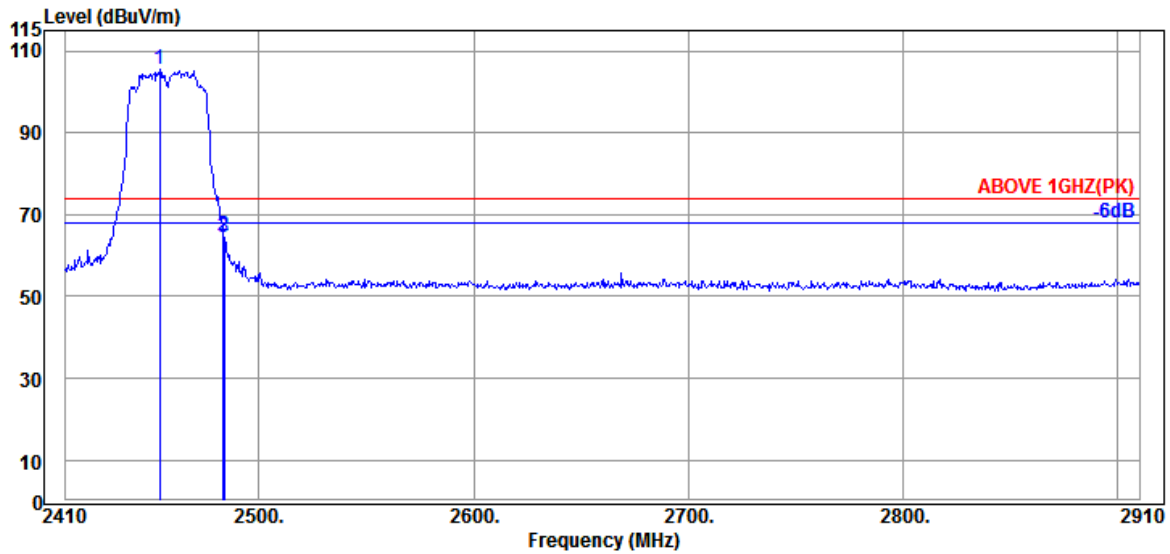

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.000	27.84	6.15	33.14	104.48	105.33	---	---	Peak
2483.500	28.01	6.18	33.11	63.74	64.82	74.00	9.18	Peak
2484.000	28.01	6.18	33.11	63.50	64.58	74.00	9.42	Peak

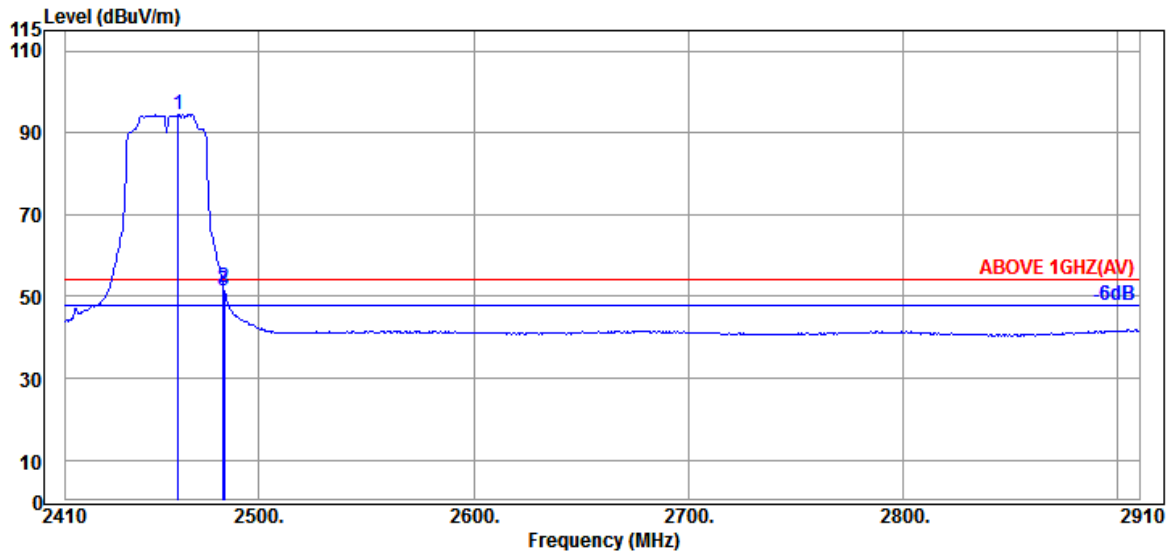


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.500	27.89	6.15	33.13	93.51	94.42	---	---	Average
2483.500	28.01	6.18	33.11	51.15	52.23	54.00	1.77	Average
2484.000	28.01	6.18	33.11	50.11	51.19	54.00	2.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

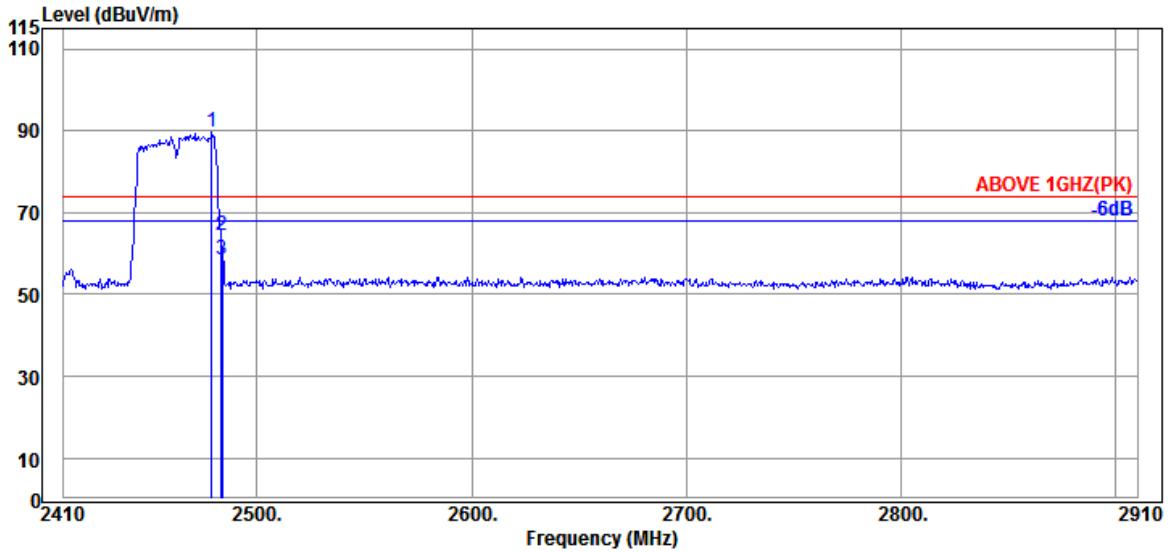

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.000	27.97	6.18	33.12	88.52	89.55	---	---	Peak
2483.500	28.01	6.18	33.11	63.29	64.37	74.00	9.63	Peak
2484.000	28.01	6.18	33.11	57.52	58.60	74.00	15.40	Peak

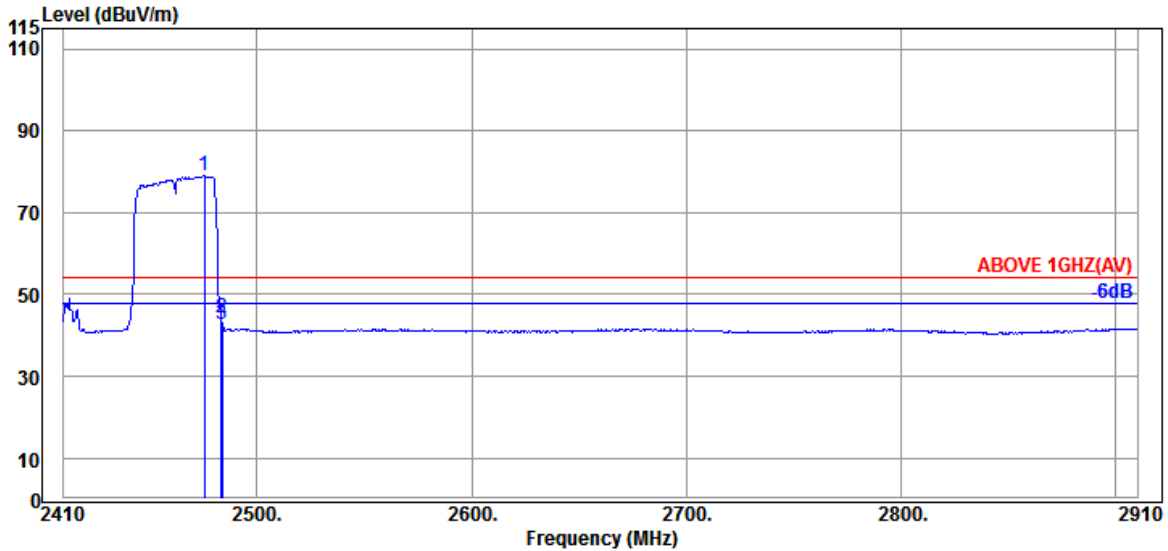


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.500	27.97	6.18	33.12	77.92	78.95	---	---	Average
2483.500	28.01	6.18	33.11	43.01	44.09	54.00	9.91	Average
2484.000	28.01	6.18	33.11	41.46	42.54	54.00	11.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

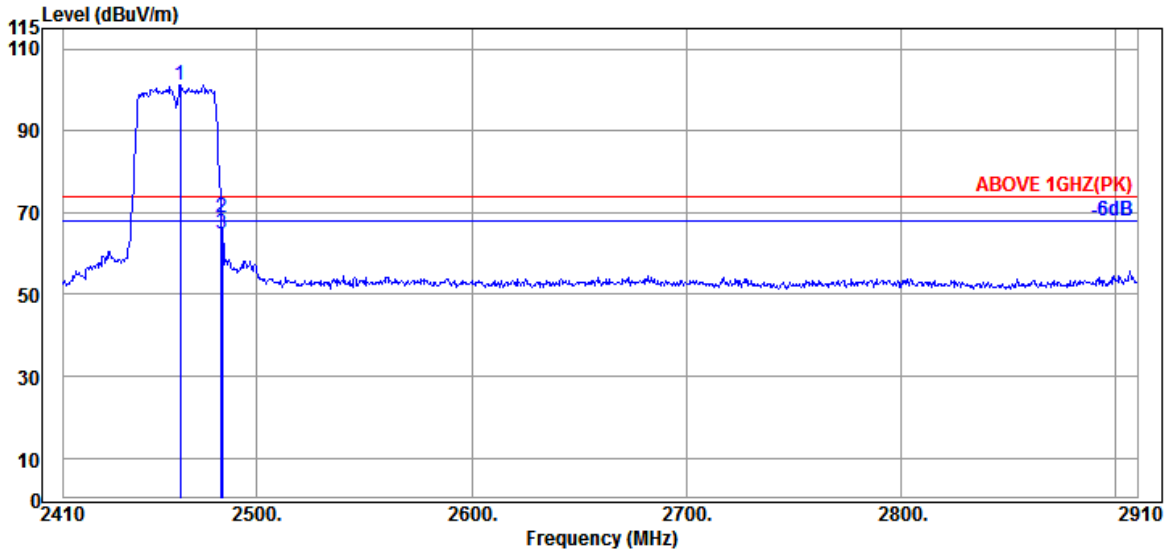

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	27.89	6.15	33.13	100.40	101.31	---	---	Peak
2483.500	28.01	6.18	33.11	67.78	68.86	74.00	5.14	Peak
2484.000	28.01	6.18	33.11	63.65	64.73	74.00	9.27	Peak

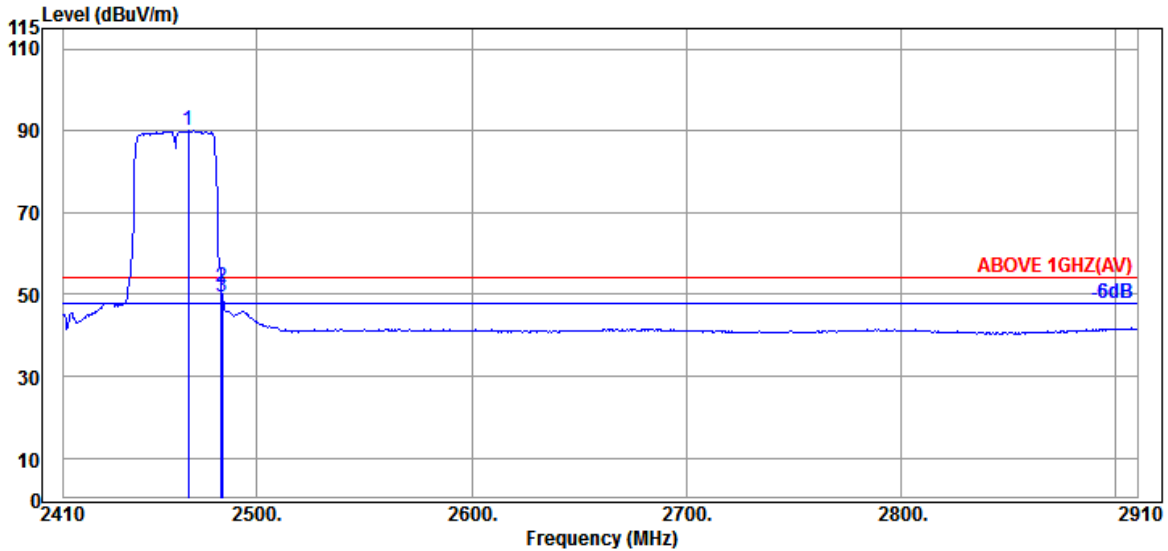


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	27.93	6.15	33.13	89.00	89.95	---	---	Average
2483.500	28.01	6.18	33.11	50.71	51.79	54.00	2.21	Average
2484.000	28.01	6.18	33.11	48.37	49.45	54.00	4.55	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

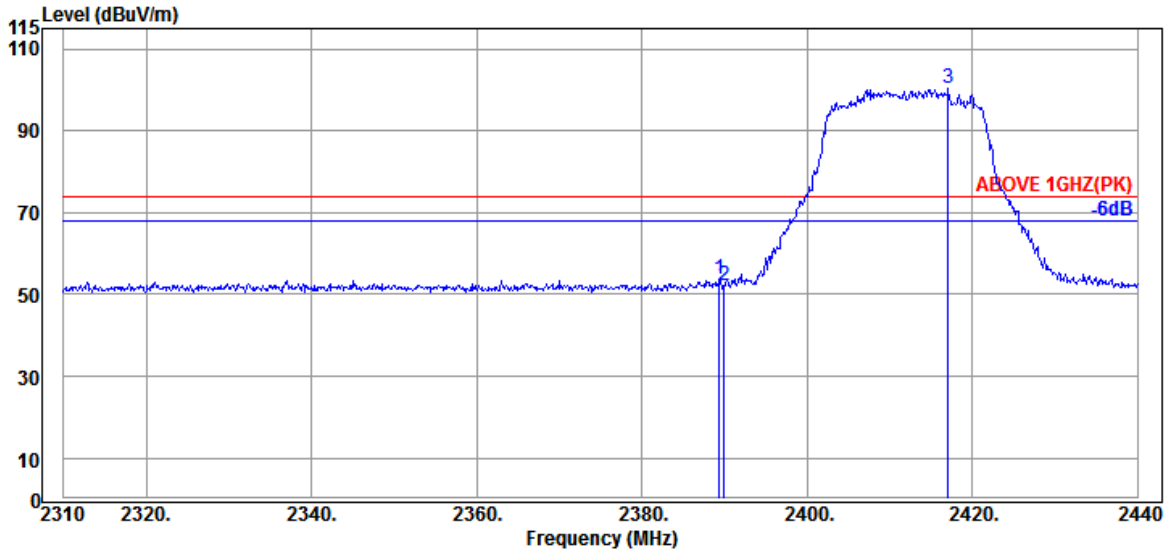

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.430	27.57	6.04	33.19	53.13	53.55	74.00	20.45	Peak
2389.950	27.57	6.04	33.19	51.71	52.13	74.00	21.87	Peak
@ 2417.120	27.66	6.07	33.17	99.77	100.33	---	---	Peak

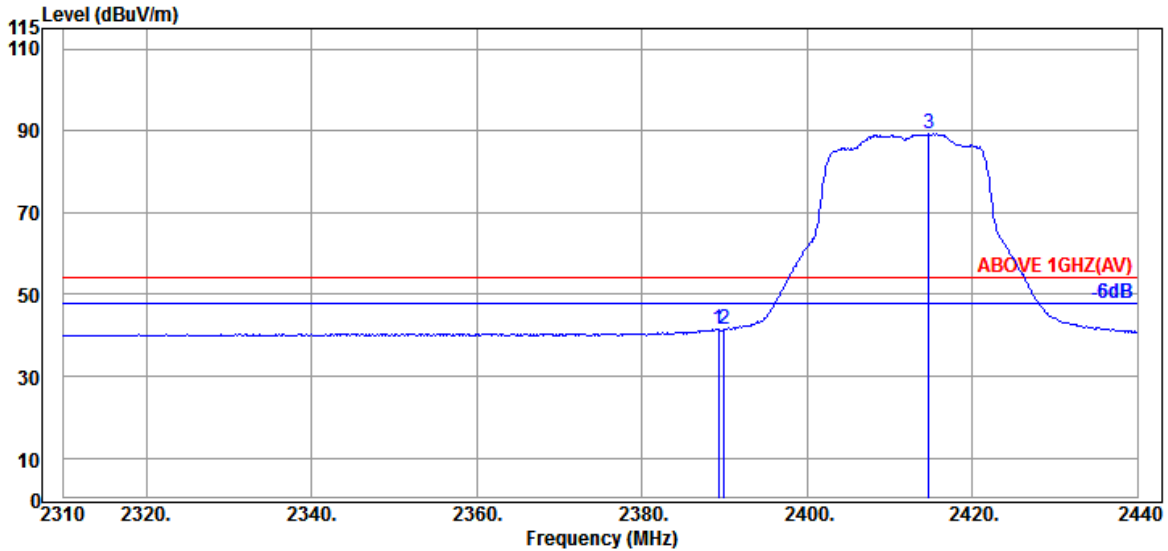

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	27.57	6.04	33.19	41.00	41.42	54.00	12.58	Average
2389.950	27.57	6.04	33.19	41.03	41.45	54.00	12.55	Average
@ 2414.780	27.66	6.07	33.17	88.63	89.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

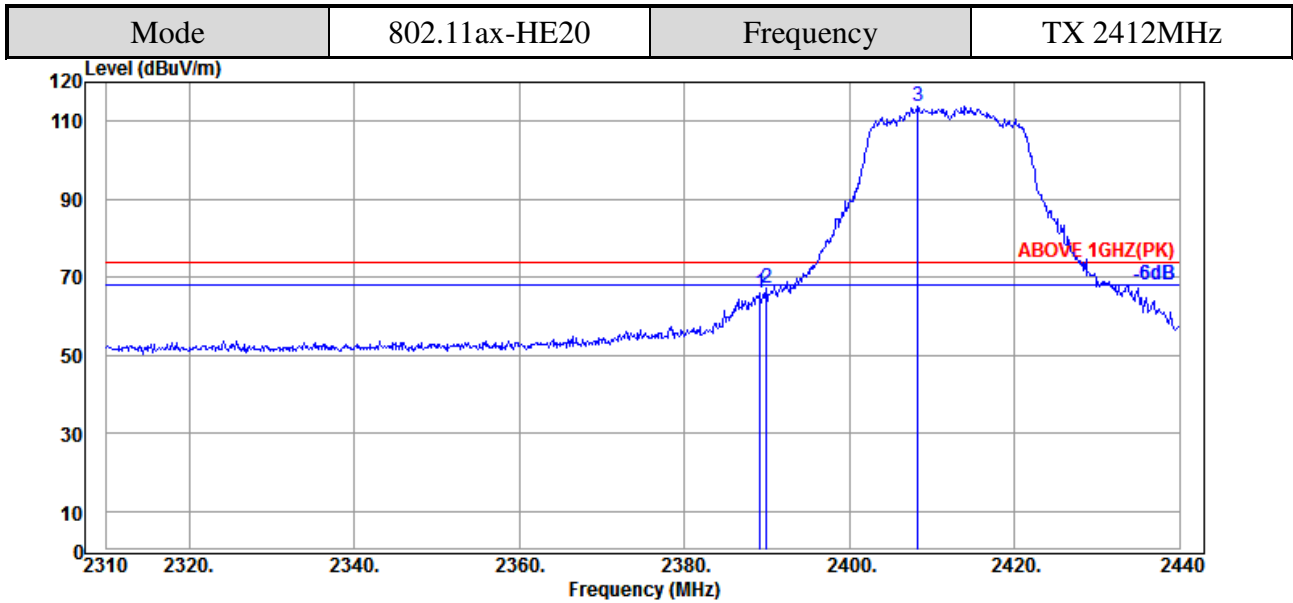

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.170	27.57	6.04	33.19	65.41	65.83	74.00	8.17	Peak
2389.950	27.57	6.04	33.19	66.67	67.09	74.00	6.91	Peak
@ 2408.280	27.63	6.07	33.18	113.20	113.72	---	---	Peak

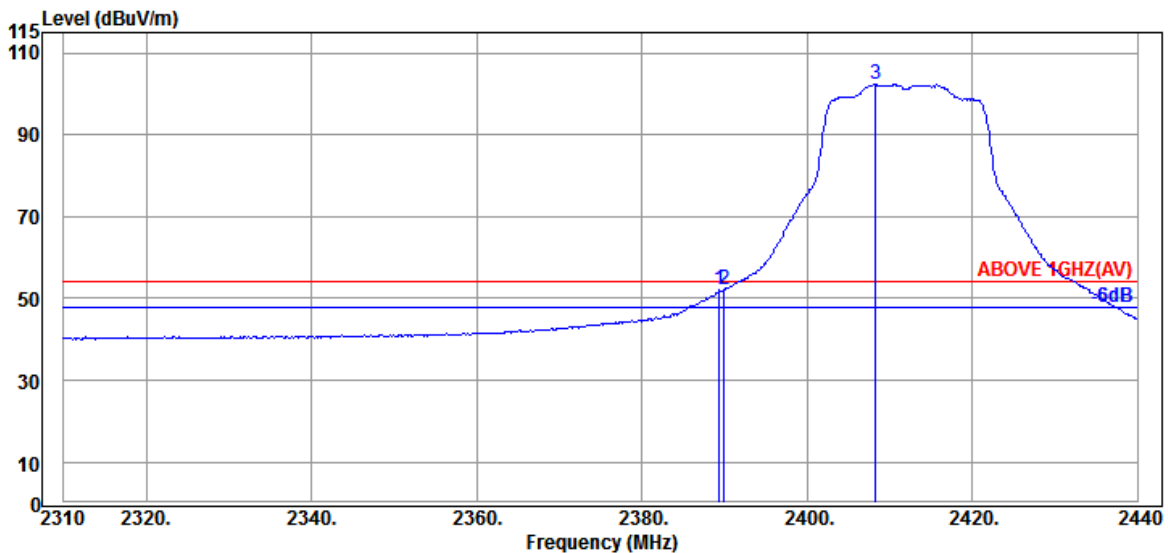


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.430	27.57	6.04	33.19	51.57	51.99	54.00	2.01	Average
2389.950	27.57	6.04	33.19	51.65	52.07	54.00	1.93	Average
@ 2408.280	27.63	6.07	33.18	101.90	102.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

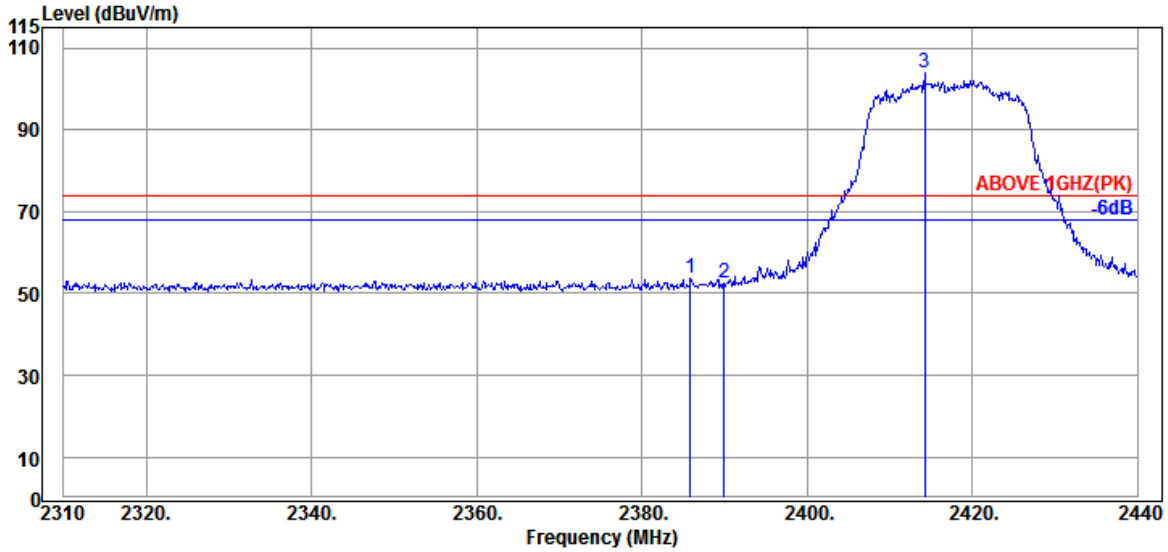

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.920	27.57	6.04	33.20	53.15	53.56	74.00	20.44	Peak
2389.950	27.57	6.04	33.19	52.19	52.61	74.00	21.39	Peak
@ 2414.260	27.66	6.07	33.17	103.25	103.81	---	---	Peak

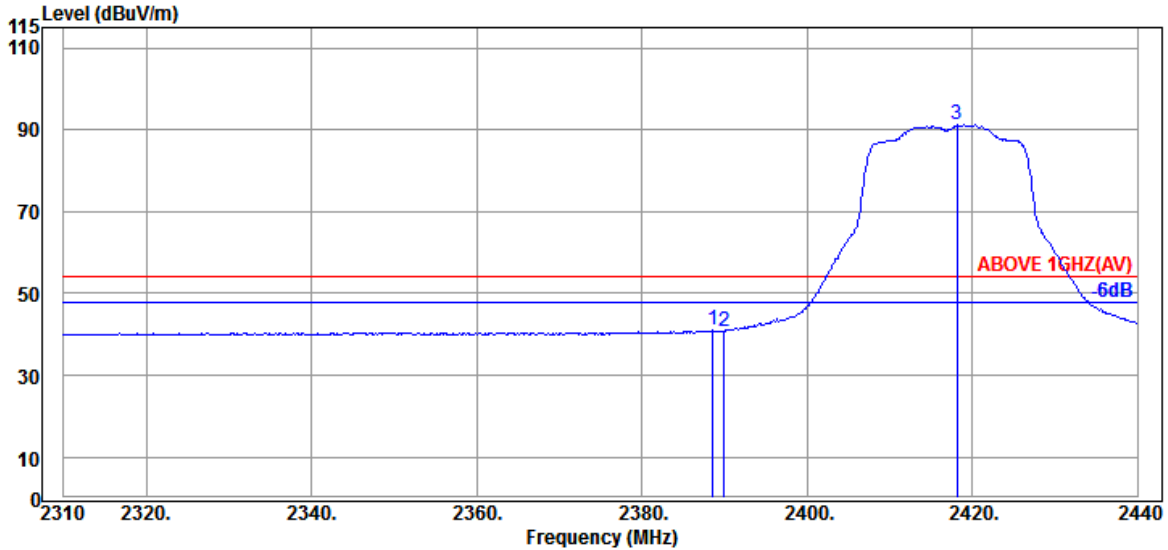


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	27.57	6.04	33.19	40.63	41.05	54.00	12.95	Average
2389.950	27.57	6.04	33.19	40.27	40.69	54.00	13.31	Average
@ 2418.160	27.66	6.07	33.17	90.64	91.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

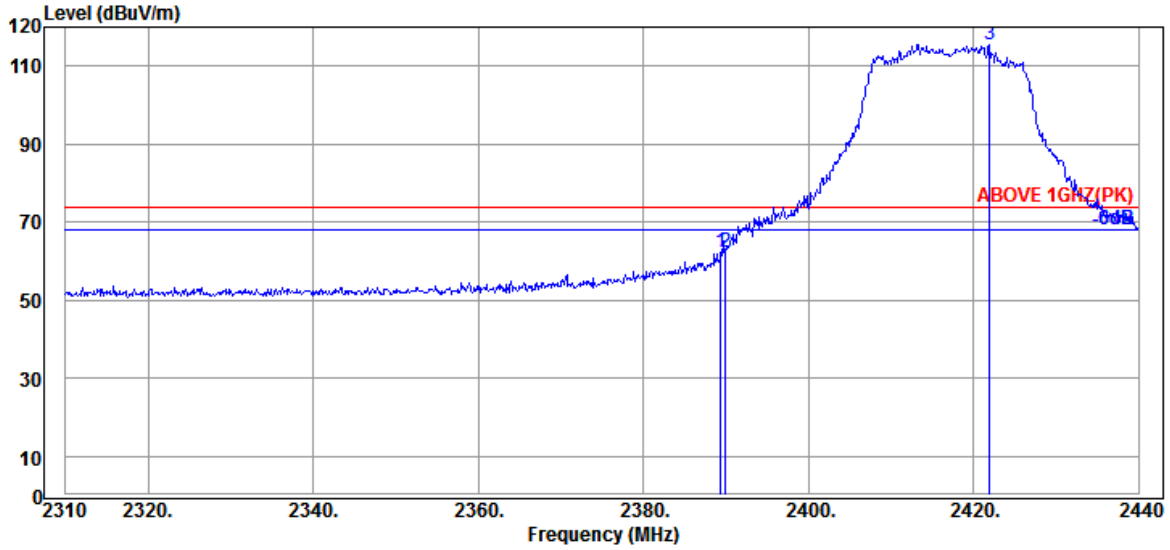

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.430	27.57	6.04	33.19	61.69	62.11	74.00	11.89	Peak
2389.950	27.57	6.04	33.19	61.96	62.38	74.00	11.62	Peak
@ 2421.930	27.69	6.10	33.17	114.93	115.55	---	---	Peak

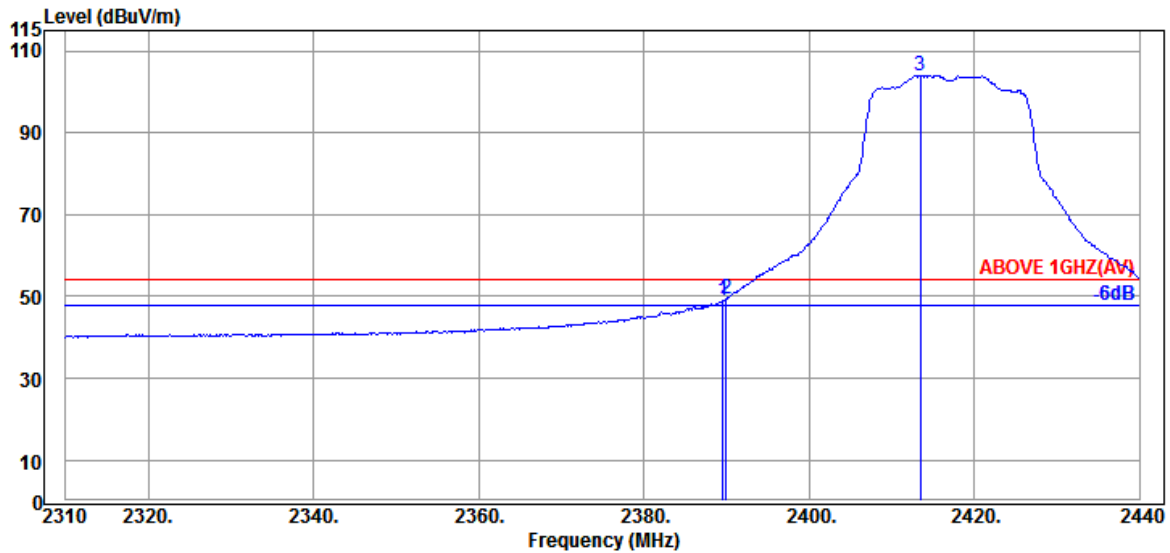


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	48.58	49.00	54.00	5.00	Average
2389.950	27.57	6.04	33.19	48.90	49.32	54.00	4.68	Average
@ 2413.480	27.66	6.07	33.17	103.45	104.01	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

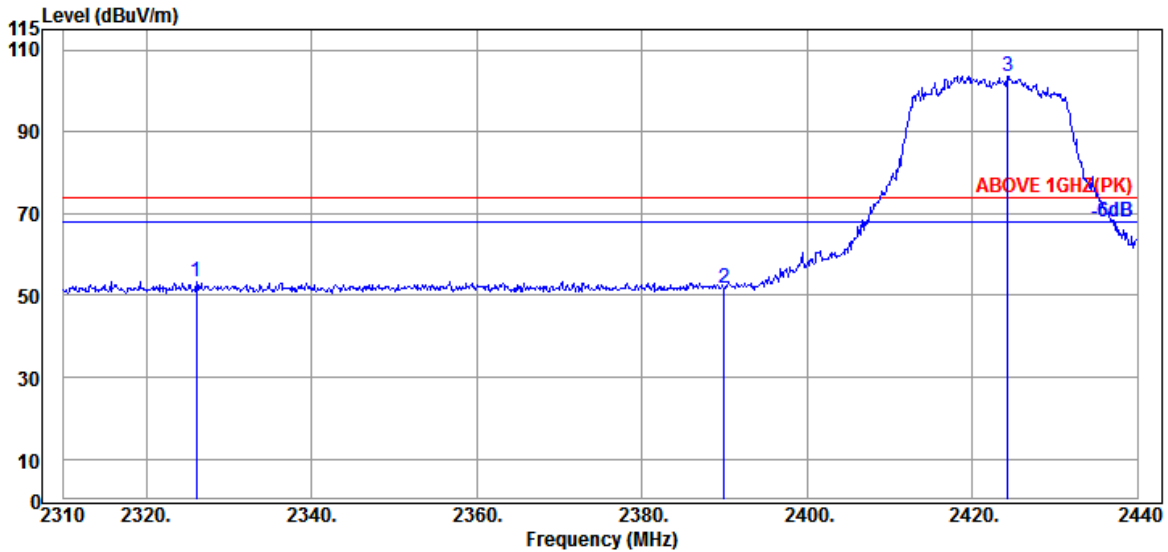

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2326.120	27.50	5.93	33.25	53.31	53.49	74.00	20.51	Peak
2389.950	27.57	6.04	33.19	51.51	51.93	74.00	22.07	Peak
@ 2424.270	27.69	6.10	33.17	103.08	103.70	---	---	Peak

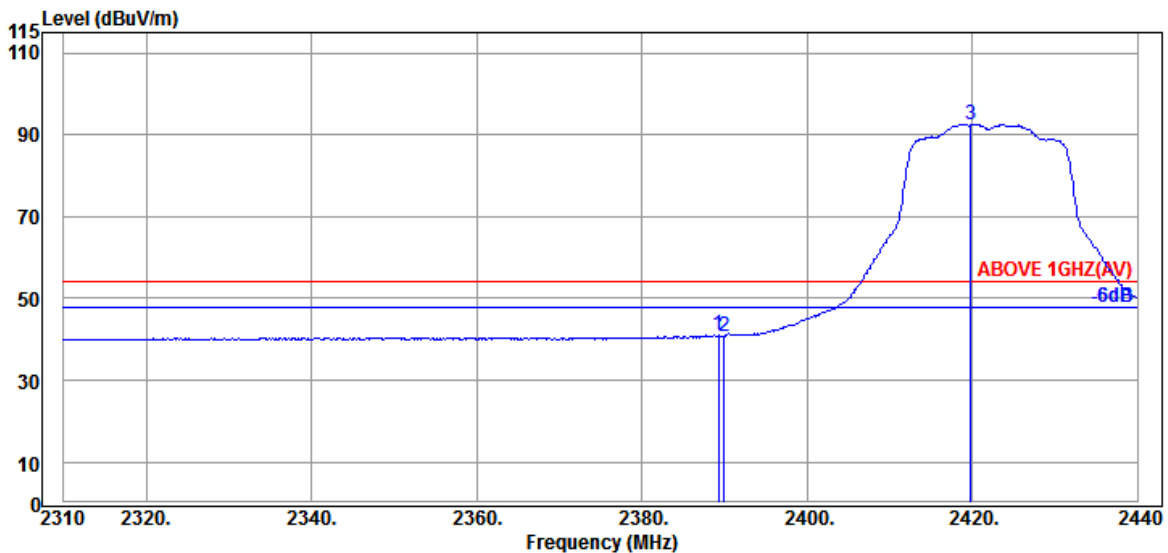


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	27.57	6.04	33.19	40.59	41.01	54.00	12.99	Average
2389.950	27.57	6.04	33.19	40.42	40.84	54.00	13.16	Average
@ 2419.850	27.69	6.10	33.17	91.91	92.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

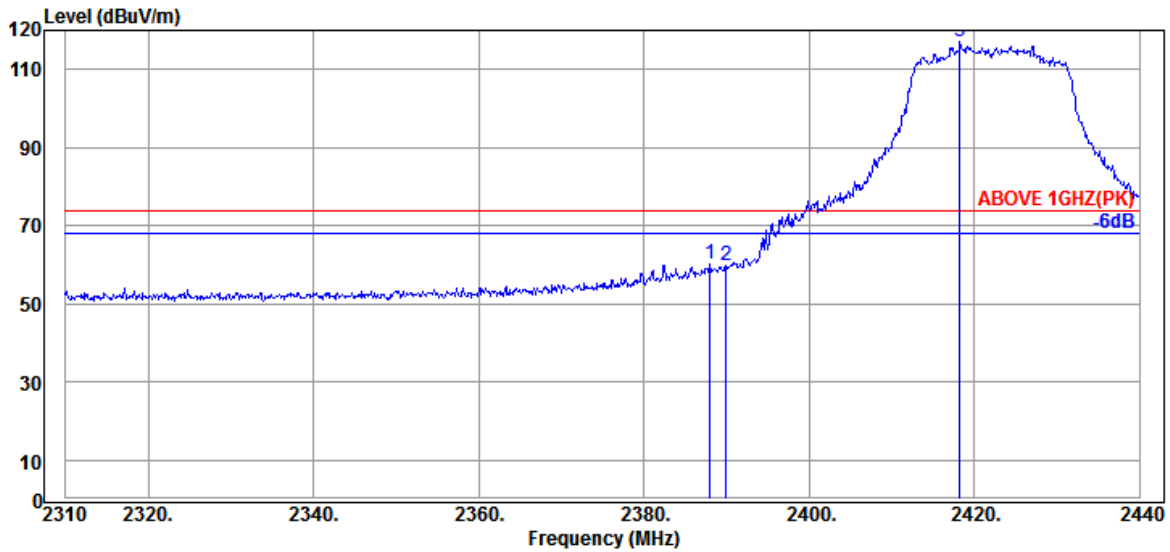

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	27.57	6.04	33.19	59.81	60.23	74.00	13.77	Peak
2389.950	27.57	6.04	33.19	59.55	59.97	74.00	14.03	Peak
@ 2418.290	27.69	6.07	33.17	116.37	116.96	---	---	Peak

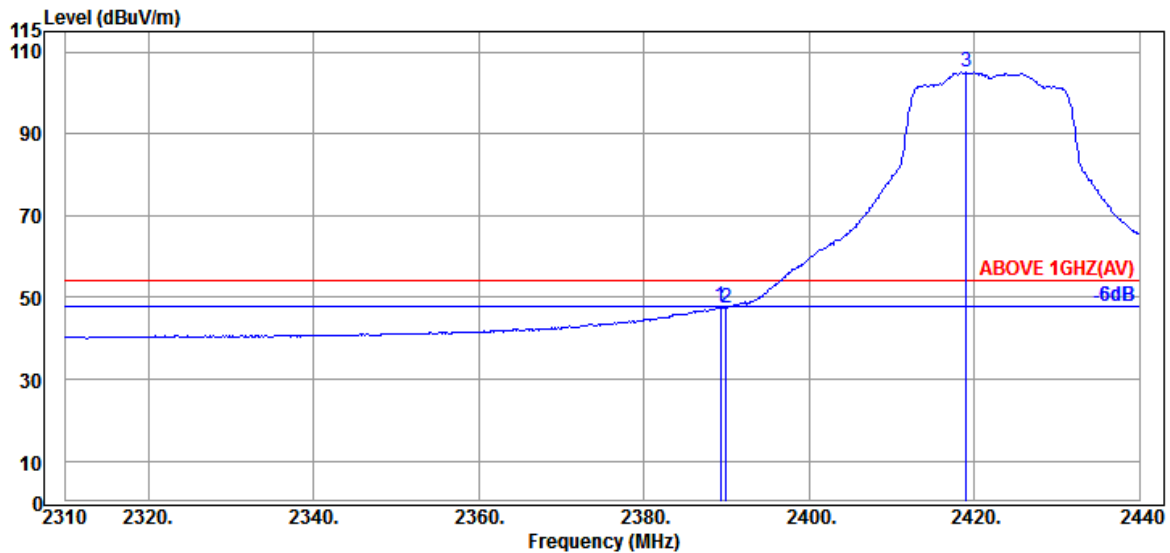


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	27.57	6.04	33.19	47.25	47.67	54.00	6.33	Average
2389.950	27.57	6.04	33.19	47.16	47.58	54.00	6.42	Average
@ 2419.070	27.69	6.07	33.17	104.49	105.08	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

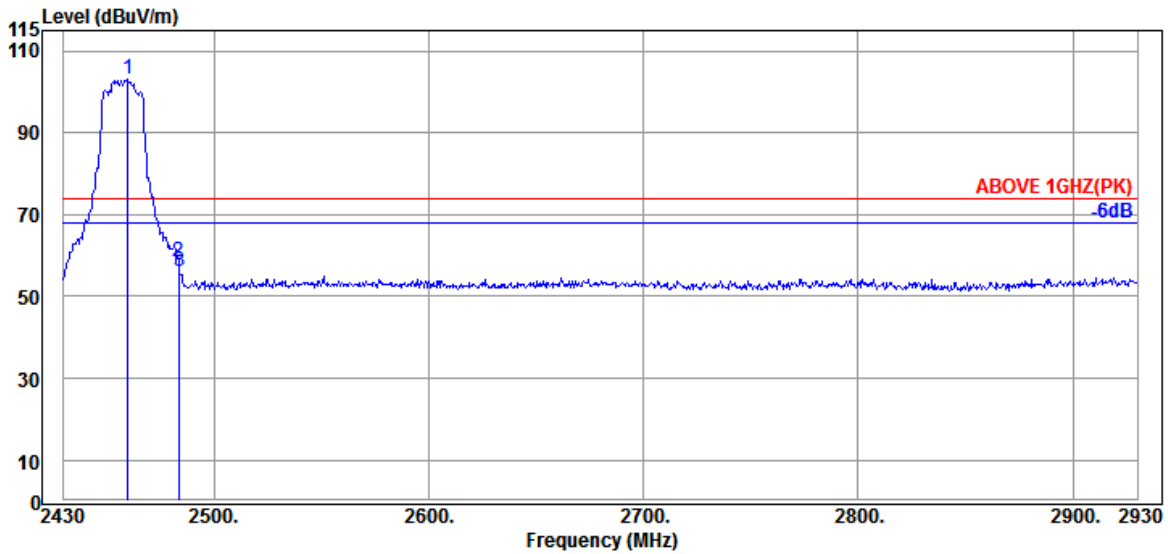

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	27.84	6.15	33.13	102.14	103.00	---	---	Peak
2483.500	28.01	6.18	33.11	57.33	58.41	74.00	15.59	Peak
2484.000	28.01	6.18	33.11	55.05	56.13	74.00	17.87	Peak

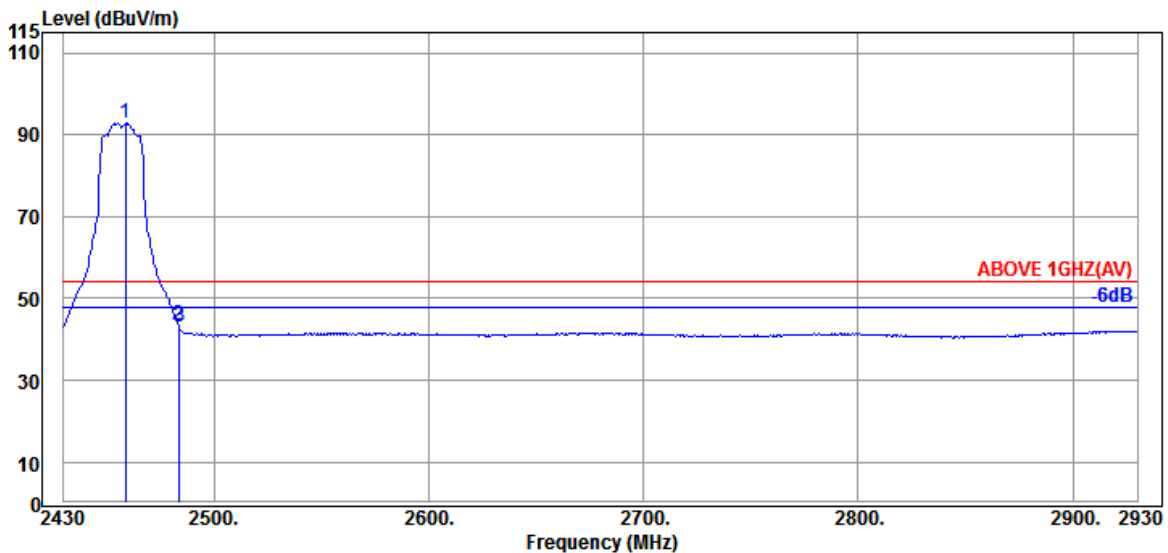


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	27.84	6.15	33.13	92.05	92.91	---	---	Average
2483.500	28.01	6.18	33.11	42.39	43.47	54.00	10.53	Average
2484.000	28.01	6.18	33.11	42.03	43.11	54.00	10.89	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

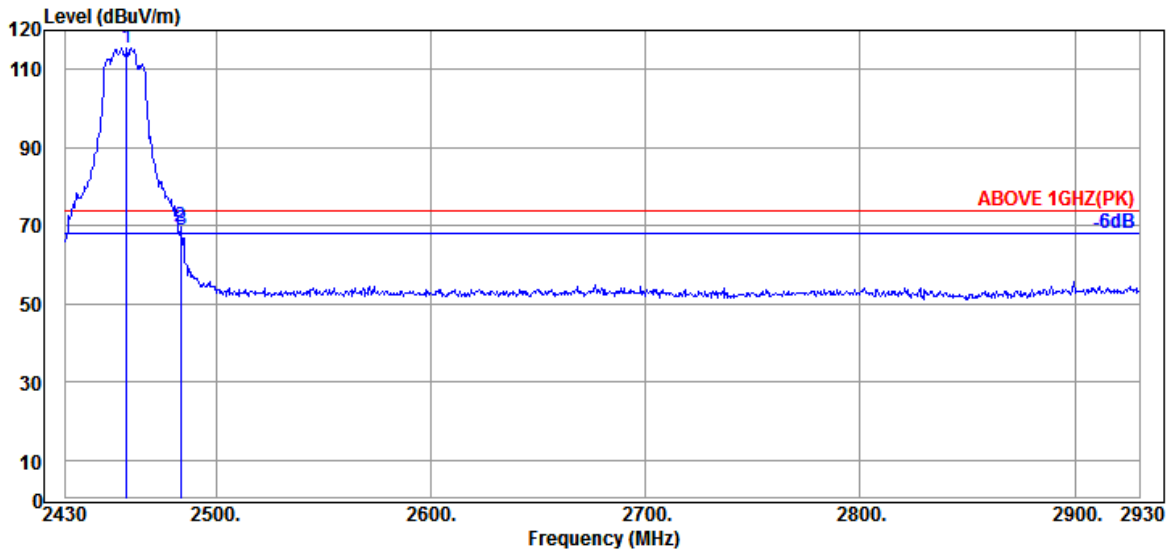

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.500	27.84	6.15	33.14	114.82	115.67	---	---	Peak
2483.500	28.01	6.18	33.11	68.46	69.54	74.00	4.46	Peak
2484.000	28.01	6.18	33.11	67.76	68.84	74.00	5.16	Peak

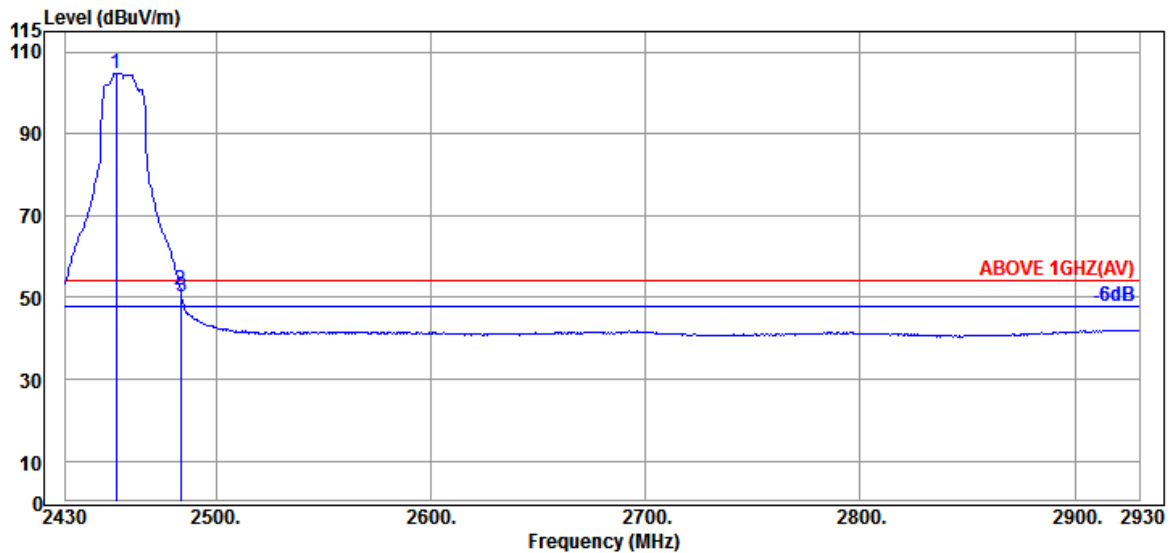


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.500	27.84	6.15	33.14	104.06	104.91	---	---	Average
2483.500	28.01	6.18	33.11	50.65	51.73	54.00	2.27	Average
2484.000	28.01	6.18	33.11	49.18	50.26	54.00	3.74	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

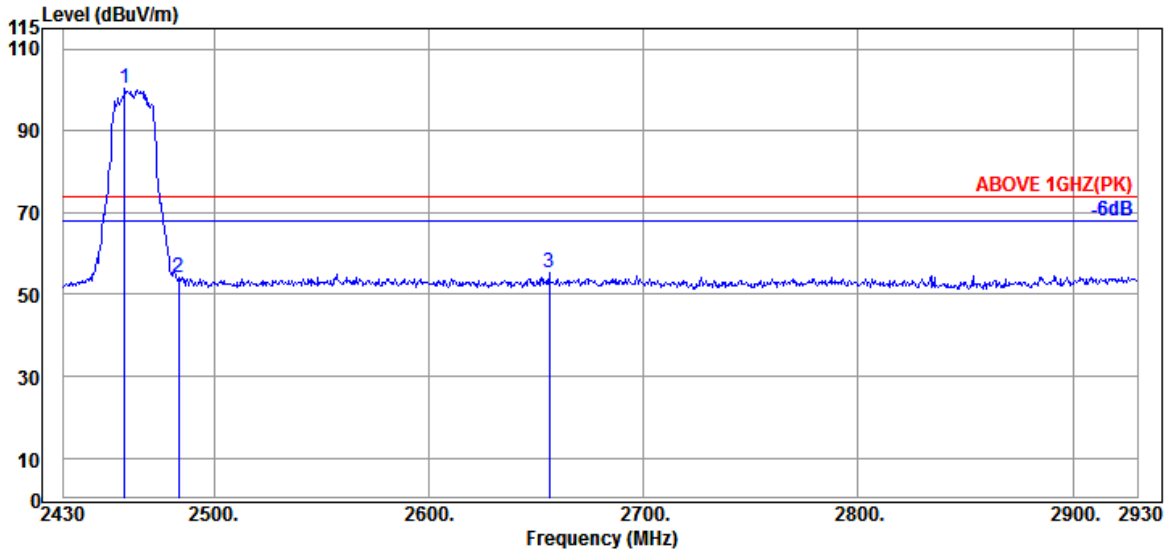

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	27.84	6.15	33.14	99.35	100.20	---	---	Peak
2483.500	28.01	6.18	33.11	53.10	54.18	74.00	19.82	Peak
2656.000	28.81	6.41	32.99	52.93	55.16	74.00	18.84	Peak

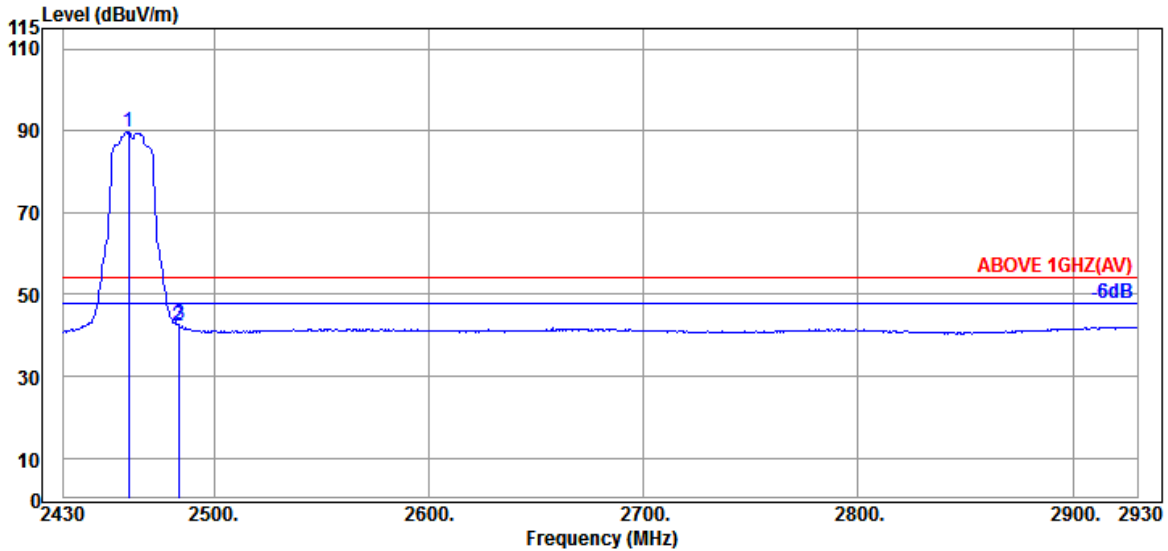


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	27.89	6.15	33.13	88.78	89.69	---	---	Average
2483.500	28.01	6.18	33.11	41.32	42.40	54.00	11.60	Average
2484.000	28.01	6.18	33.11	41.42	42.50	54.00	11.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

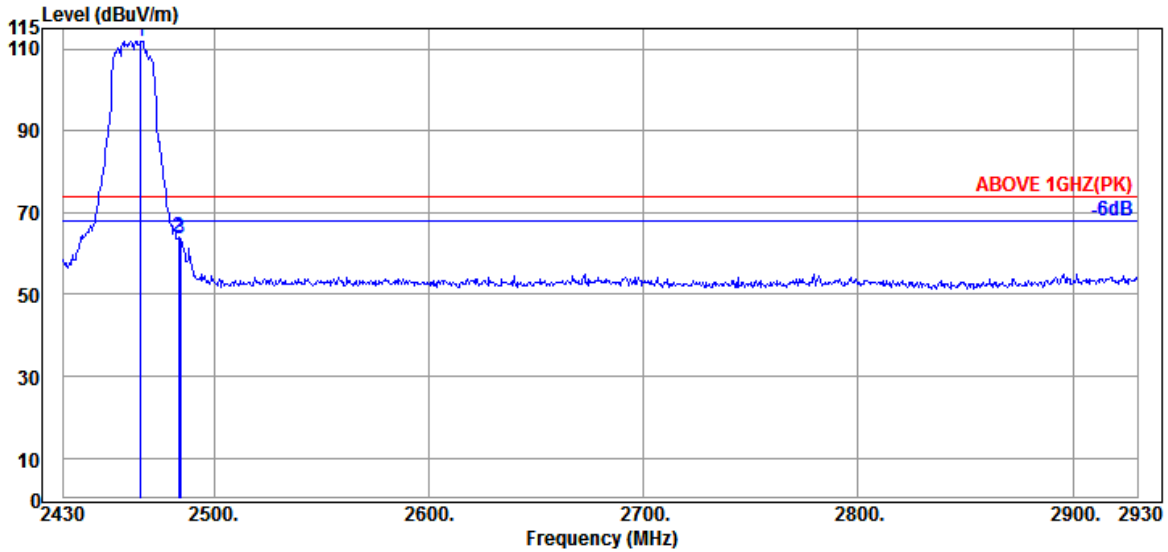

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	27.89	6.15	33.13	111.11	112.02	---	---	Peak
2483.500	28.01	6.18	33.11	62.88	63.96	74.00	10.04	Peak
2484.500	28.01	6.18	33.11	62.59	63.67	74.00	10.33	Peak

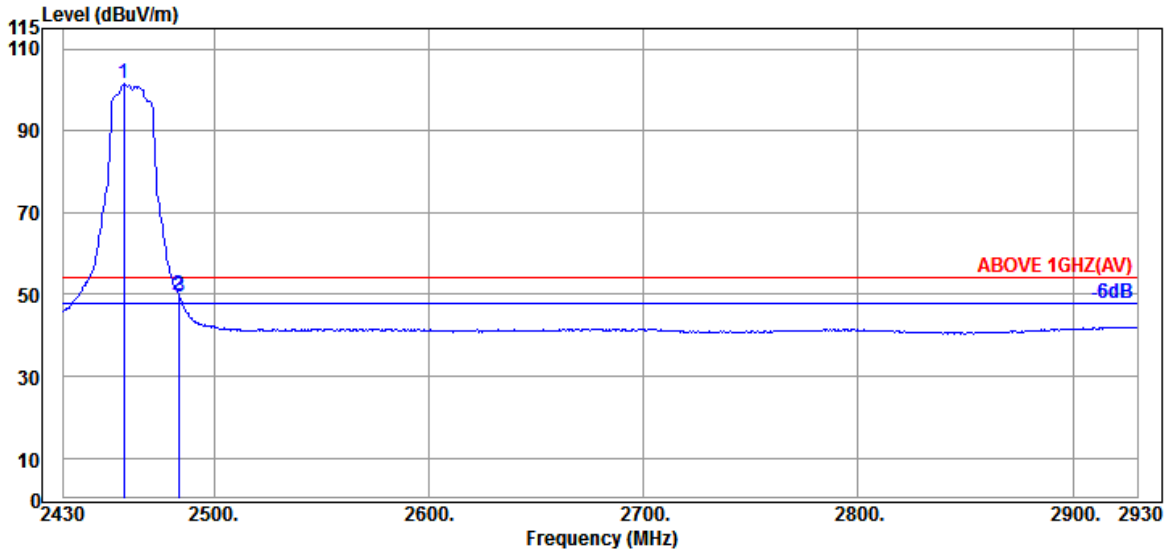


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.000	27.84	6.15	33.14	100.62	101.47	---	---	Average
2483.500	28.01	6.18	33.11	48.74	49.82	54.00	4.18	Average
2484.000	28.01	6.18	33.11	48.36	49.44	54.00	4.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

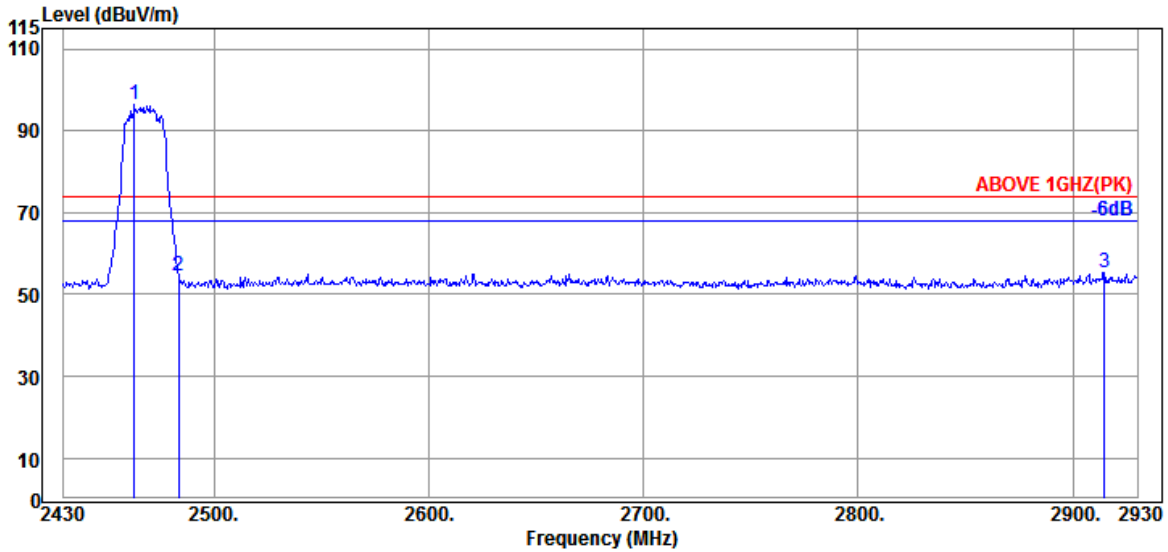

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.000	27.89	6.15	33.13	95.33	96.24	---	---	Peak
2483.500	28.01	6.18	33.11	53.59	54.67	74.00	19.33	Peak
2914.500	29.20	6.75	32.81	52.07	55.21	74.00	18.79	Peak

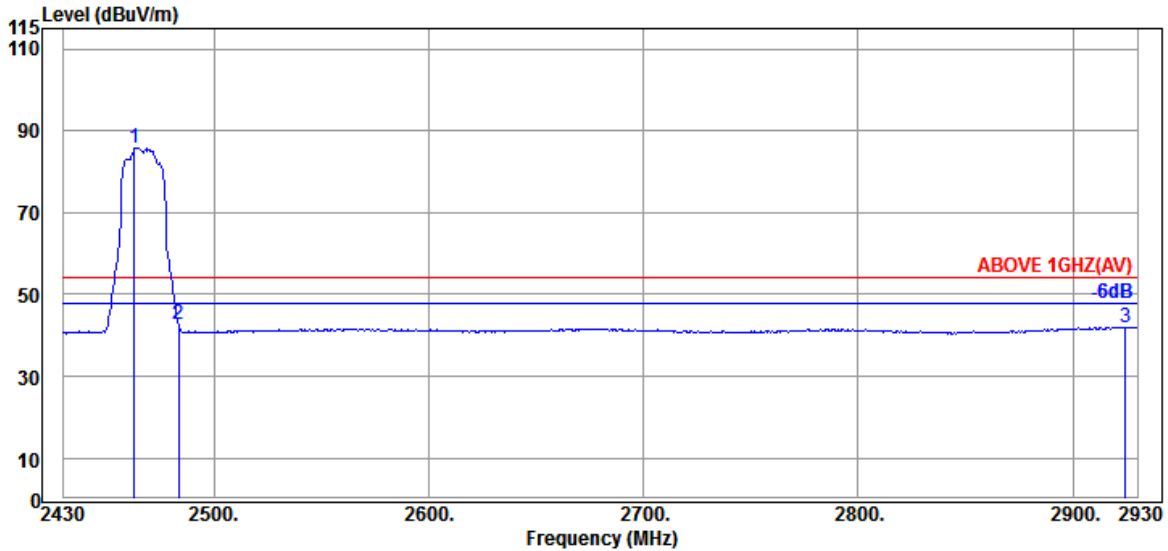


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.000	27.89	6.15	33.13	84.94	85.85	---	---	Average
2483.500	28.01	6.18	33.11	41.60	42.68	54.00	11.32	Average
2924.500	29.20	6.75	32.80	38.88	42.03	54.00	11.97	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

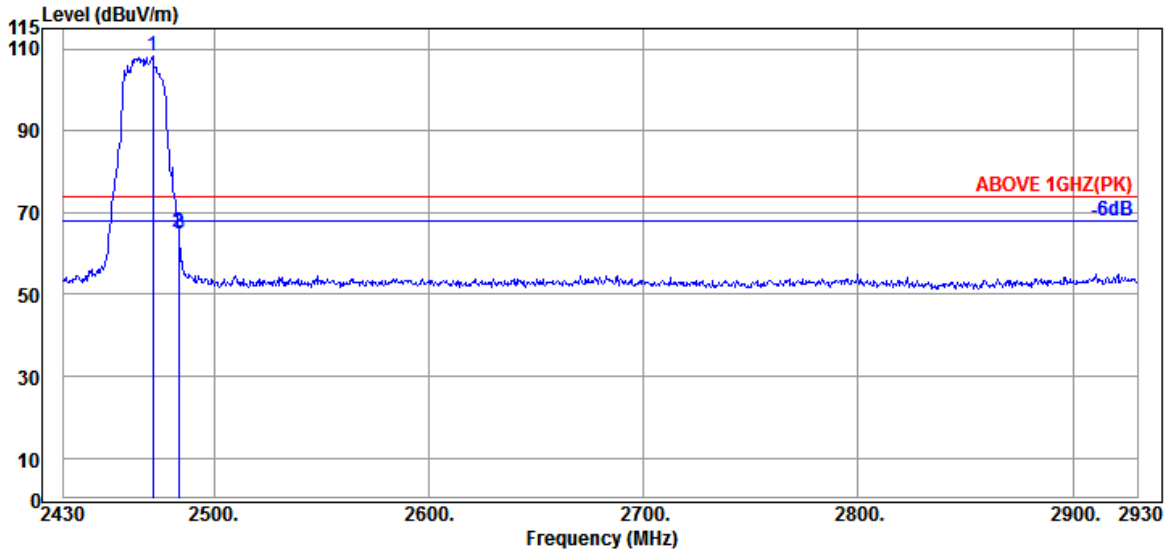

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	27.93	6.18	33.13	107.24	108.22	---	---	Peak
2483.500	28.01	6.18	33.11	63.98	65.06	74.00	8.94	Peak
2484.000	28.01	6.18	33.11	63.83	64.91	74.00	9.09	Peak

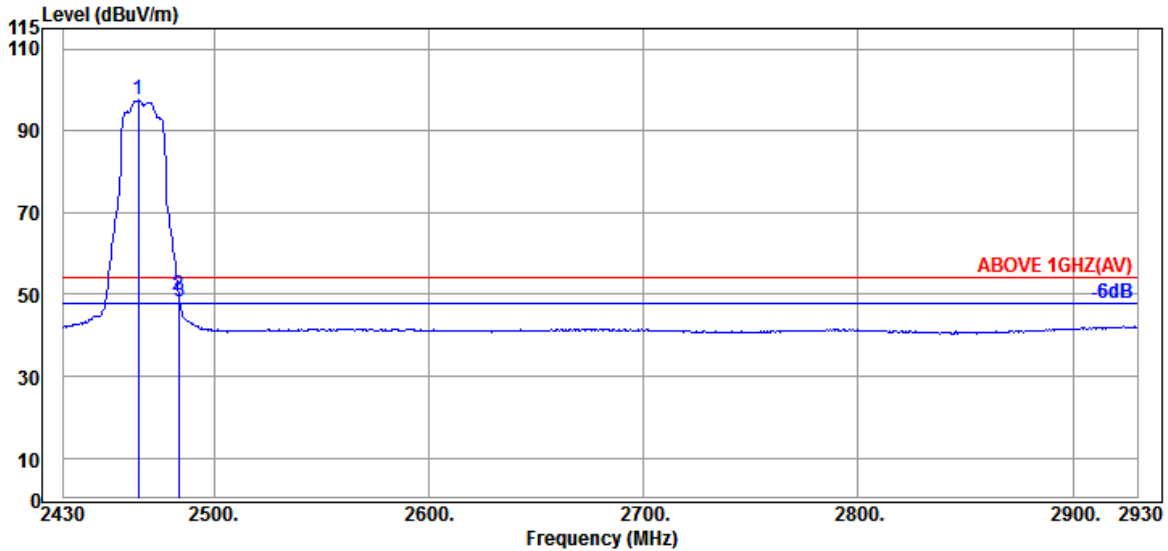


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	27.89	6.15	33.13	96.55	97.46	---	---	Average
2483.500	28.01	6.18	33.11	48.87	49.95	54.00	4.05	Average
2484.000	28.01	6.18	33.11	47.32	48.40	54.00	5.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

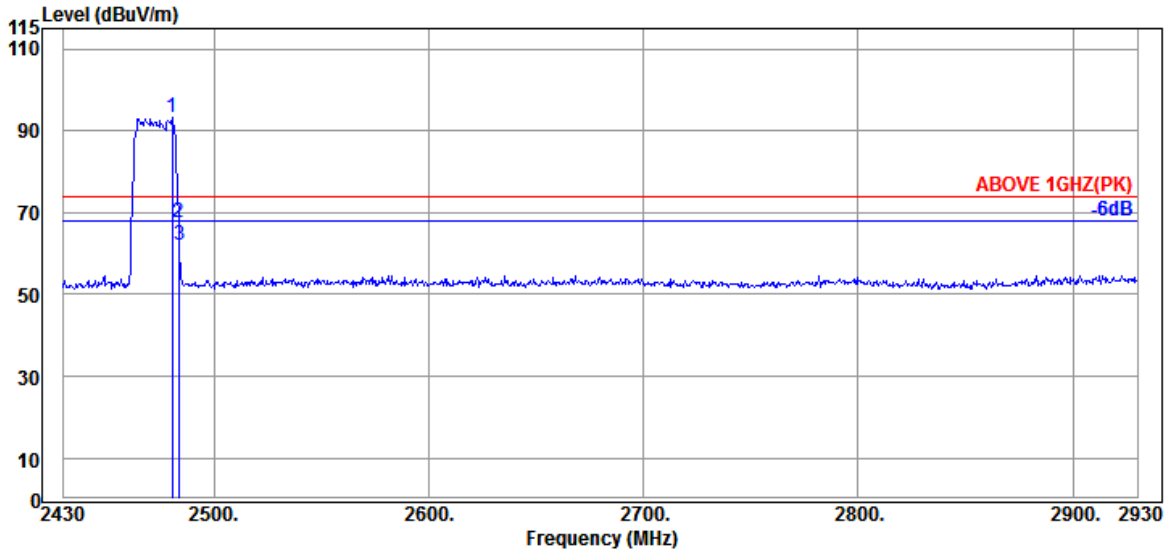

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	27.97	6.18	33.12	92.12	93.15	---	---	Peak
2483.500	28.01	6.18	33.11	66.34	67.42	74.00	6.58	Peak
2484.000	28.01	6.18	33.11	61.04	62.12	74.00	11.88	Peak

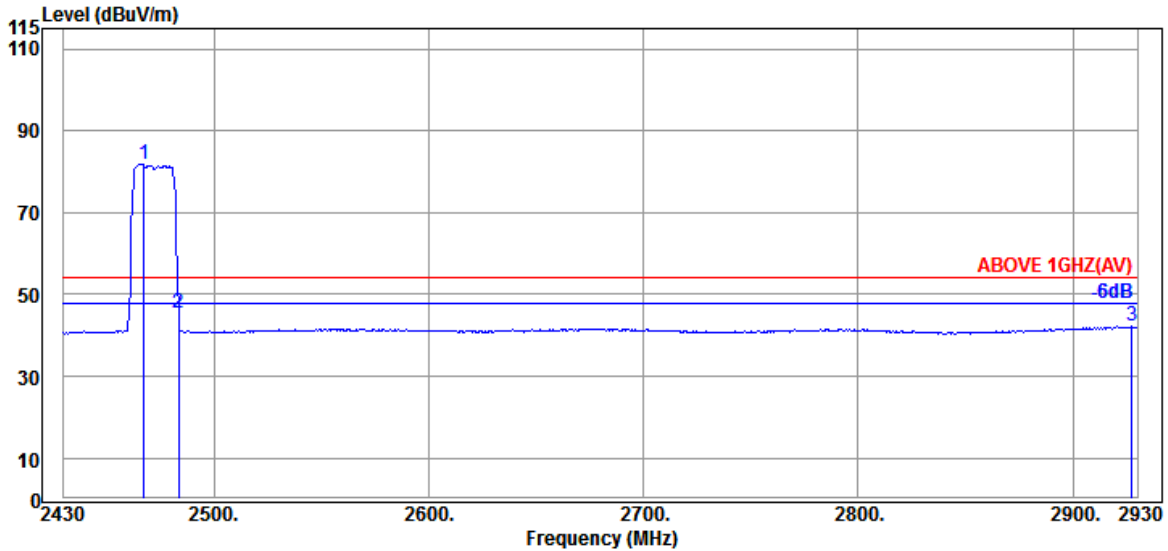


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.500	27.89	6.15	33.13	80.99	81.90	---	---	Average
2483.500	28.01	6.18	33.11	44.44	45.52	54.00	8.48	Average
2927.500	29.20	6.75	32.79	38.95	42.11	54.00	11.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

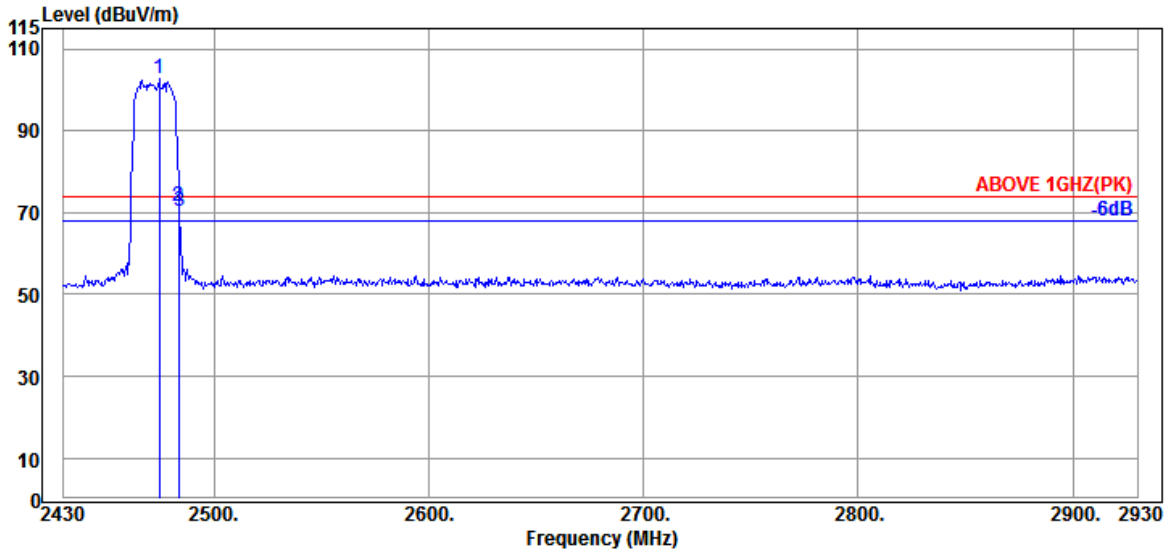

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.500	27.93	6.18	33.13	101.89	102.87	---	---	Peak
2483.500	28.01	6.18	33.11	70.51	71.59	74.00	2.41	Peak
2484.000	28.01	6.18	33.11	69.40	70.48	74.00	3.52	Peak

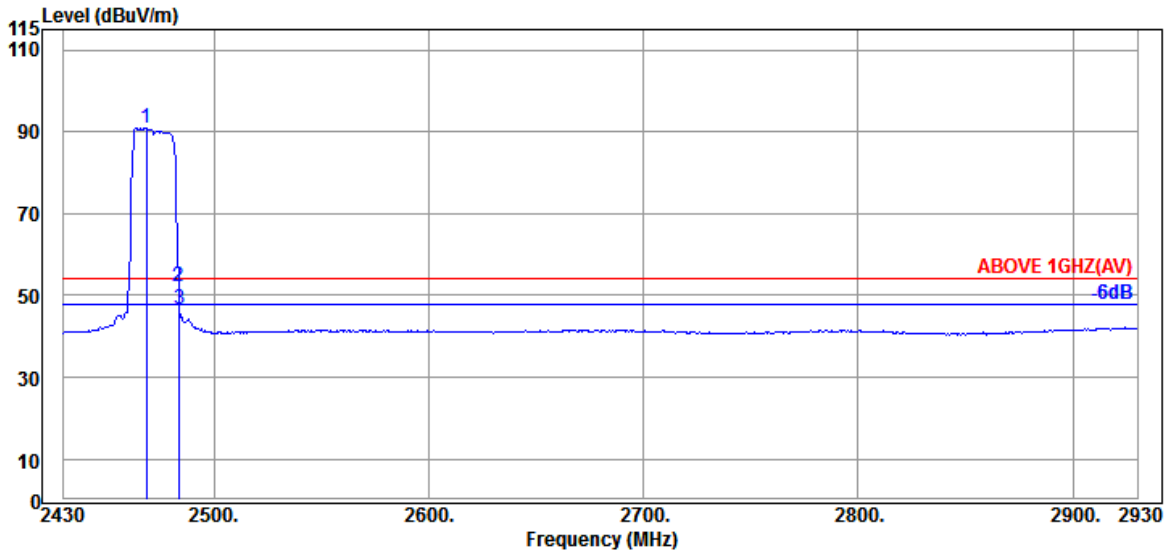


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	27.93	6.15	33.13	89.91	90.86	---	---	Average
2483.500	28.01	6.18	33.11	50.93	52.01	54.00	1.99	Average
2484.000	28.01	6.18	33.11	45.72	46.80	54.00	7.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

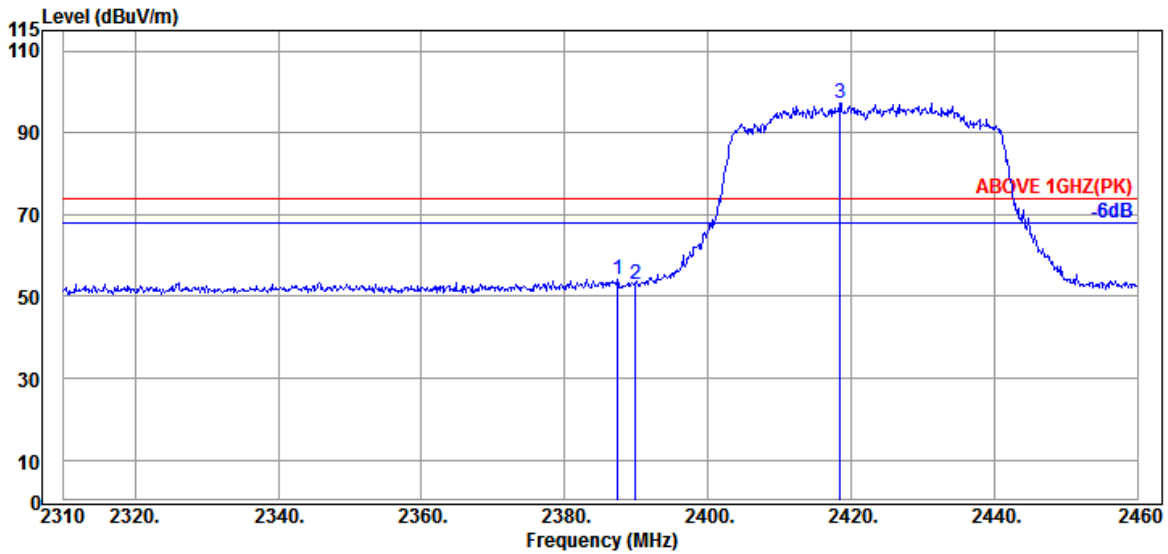

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.400	27.57	6.04	33.19	53.90	54.32	74.00	19.68	Peak
2389.950	27.57	6.04	33.19	52.48	52.90	74.00	21.10	Peak
@ 2418.450	27.69	6.07	33.17	96.81	97.40	---	---	Peak

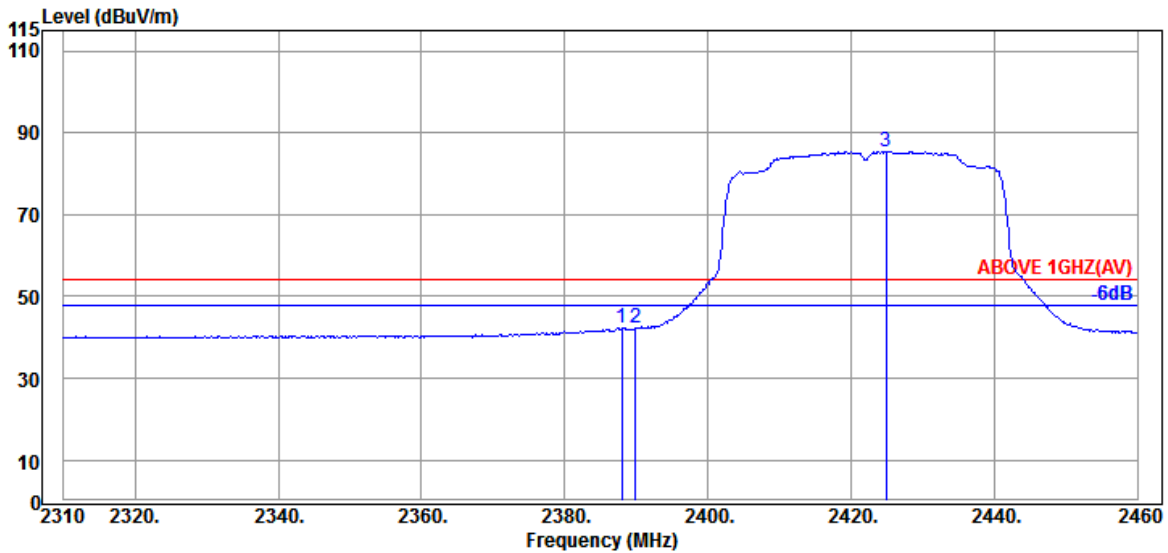


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	27.57	6.04	33.19	41.87	42.29	54.00	11.71	Average
2389.950	27.57	6.04	33.19	41.76	42.18	54.00	11.82	Average
@ 2424.900	27.69	6.10	33.17	84.91	85.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

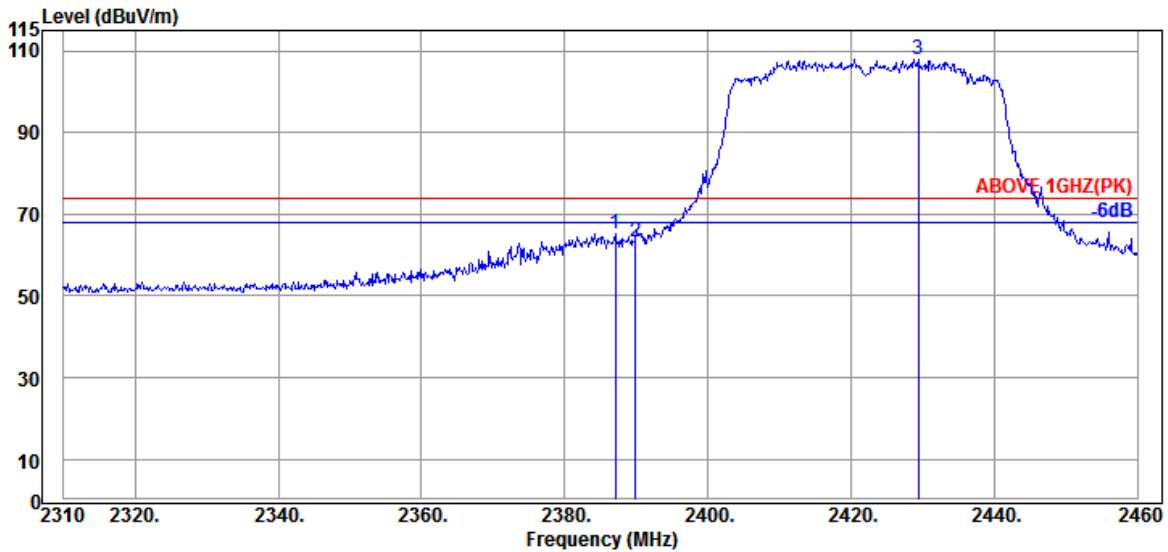

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	27.57	6.04	33.20	64.93	65.34	74.00	8.66	Peak
2389.950	27.57	6.04	33.19	62.94	63.36	74.00	10.64	Peak
@ 2429.400	27.71	6.10	33.16	107.40	108.05	---	---	Peak

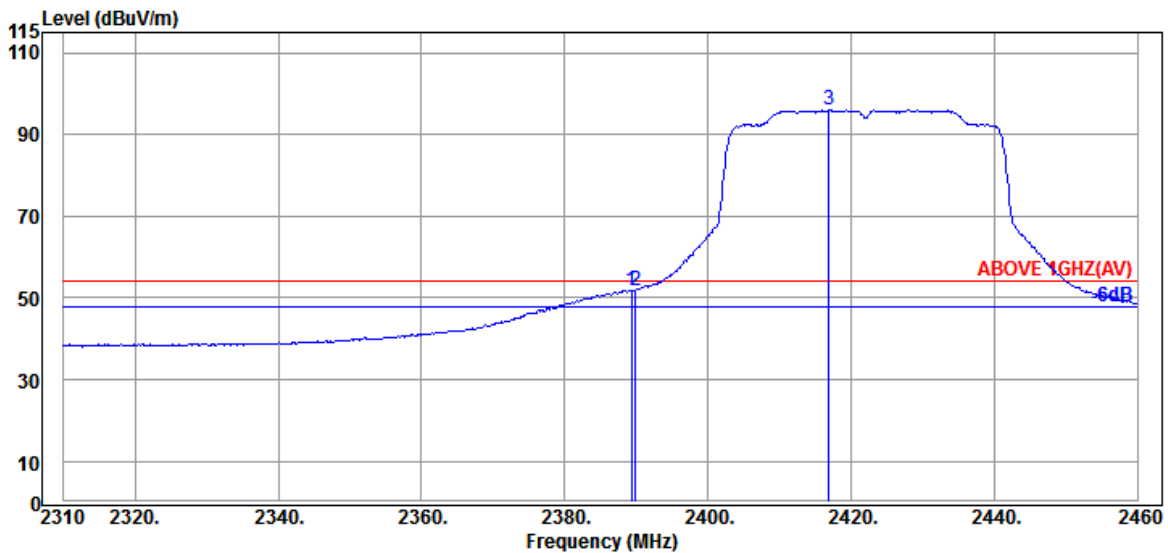


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	27.57	6.04	33.19	51.48	51.90	54.00	2.10	Average
2389.950	27.57	6.04	33.19	51.48	51.90	54.00	2.10	Average
@ 2416.950	27.66	6.07	33.17	95.42	95.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

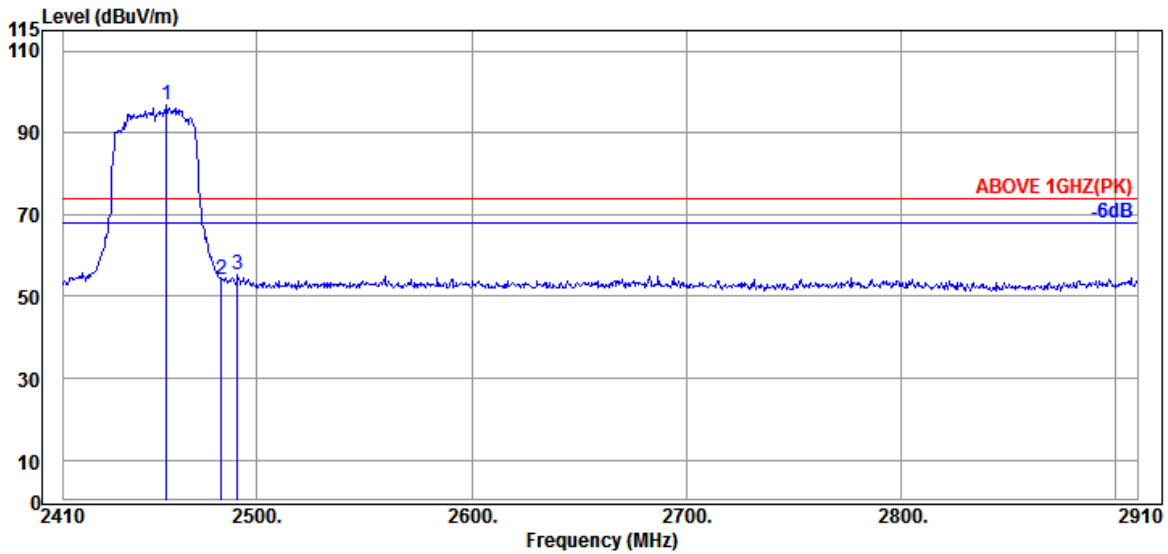

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	27.84	6.15	33.14	95.80	96.65	---	---	Peak
2483.500	28.01	6.18	33.11	53.17	54.25	74.00	19.75	Peak
2491.000	28.06	6.21	33.11	54.02	55.18	74.00	18.82	Peak

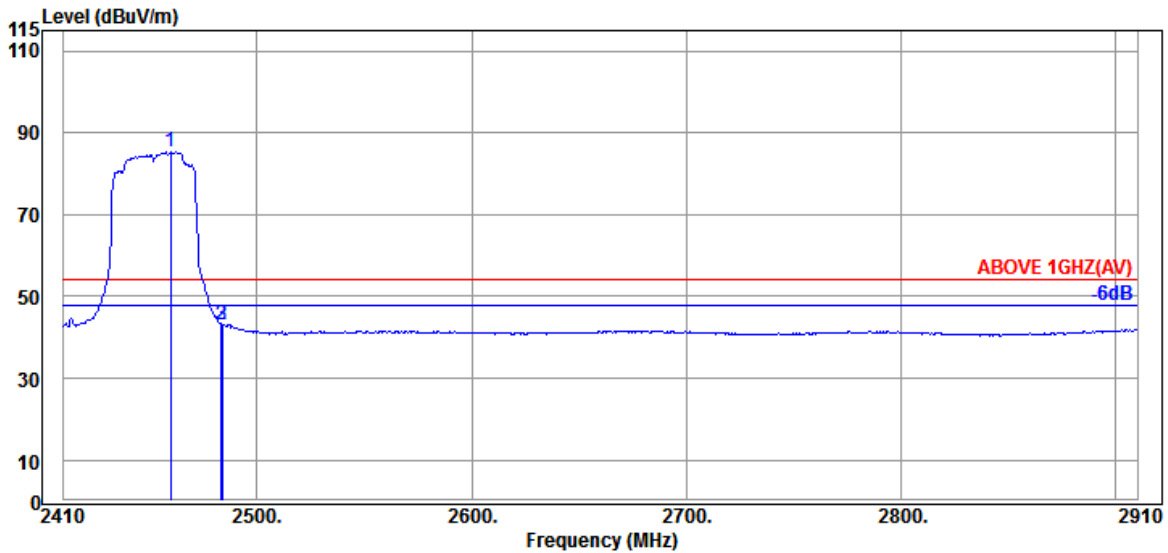


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	27.84	6.15	33.13	84.64	85.50	---	---	Average
2483.500	28.01	6.18	33.11	42.18	43.26	54.00	10.74	Average
2484.000	28.01	6.18	33.11	42.03	43.11	54.00	10.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

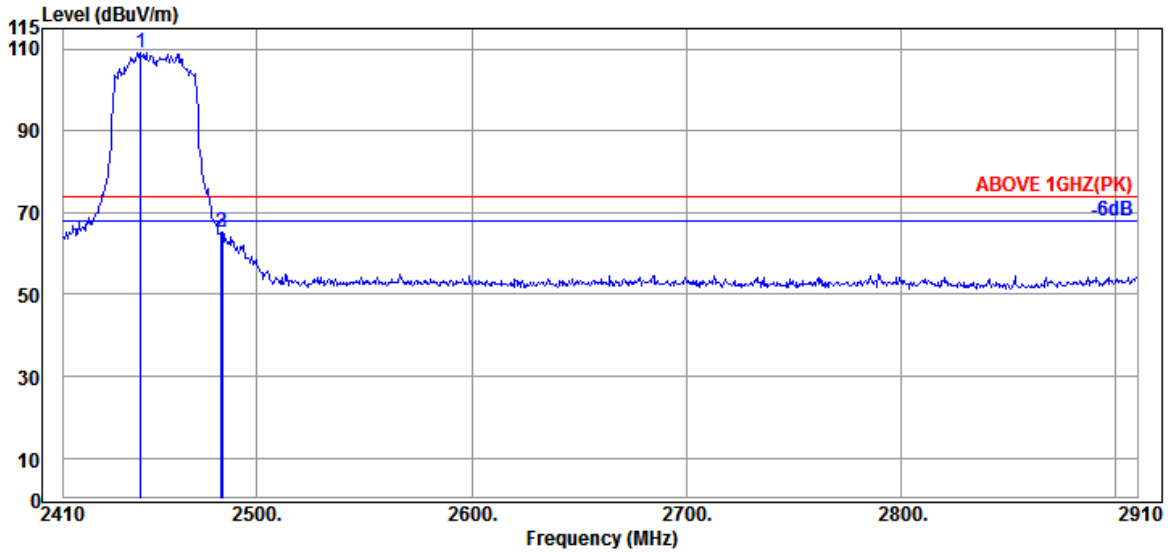

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	27.77	6.13	33.15	108.42	109.17	---	---	Peak
2483.500	28.01	6.18	33.11	64.07	65.15	74.00	8.85	Peak
2484.000	28.01	6.18	33.11	63.93	65.01	74.00	8.99	Peak

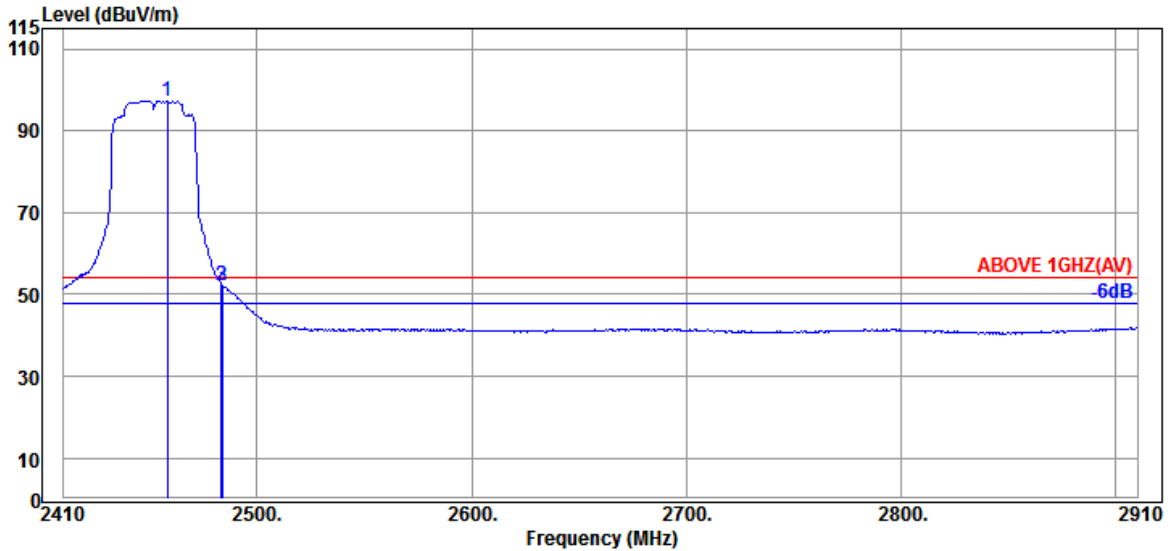


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	27.84	6.15	33.14	96.46	97.31	---	---	Average
2483.500	28.01	6.18	33.11	51.19	52.27	54.00	1.73	Average
2484.000	28.01	6.18	33.11	51.13	52.21	54.00	1.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

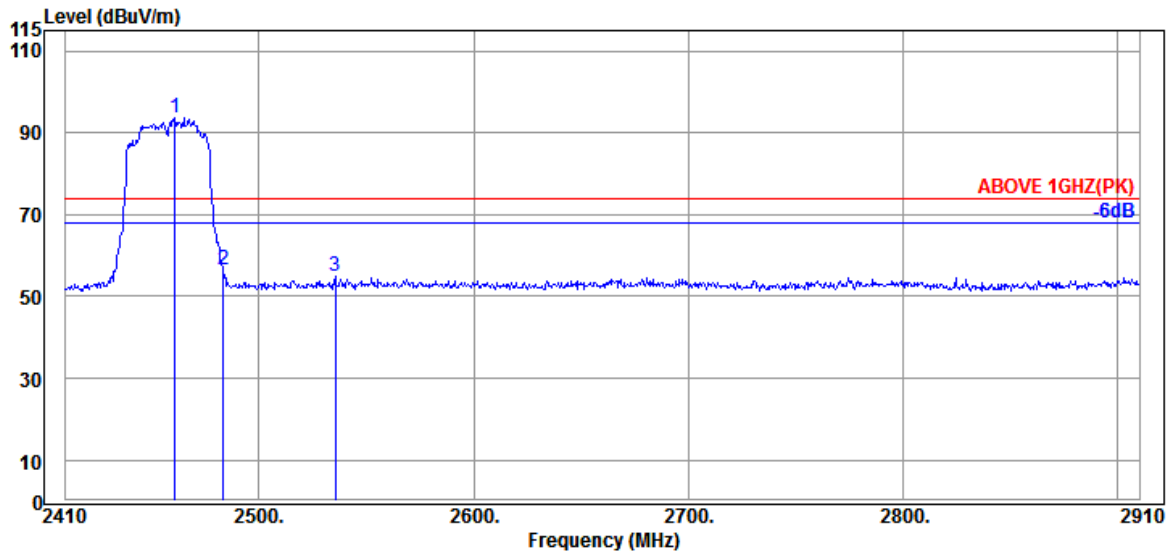

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	27.89	6.15	33.13	92.91	93.82	---	---	Peak
2483.500	28.01	6.18	33.11	55.63	56.71	74.00	17.29	Peak
2535.500	28.17	6.25	33.07	53.49	54.84	74.00	19.16	Peak

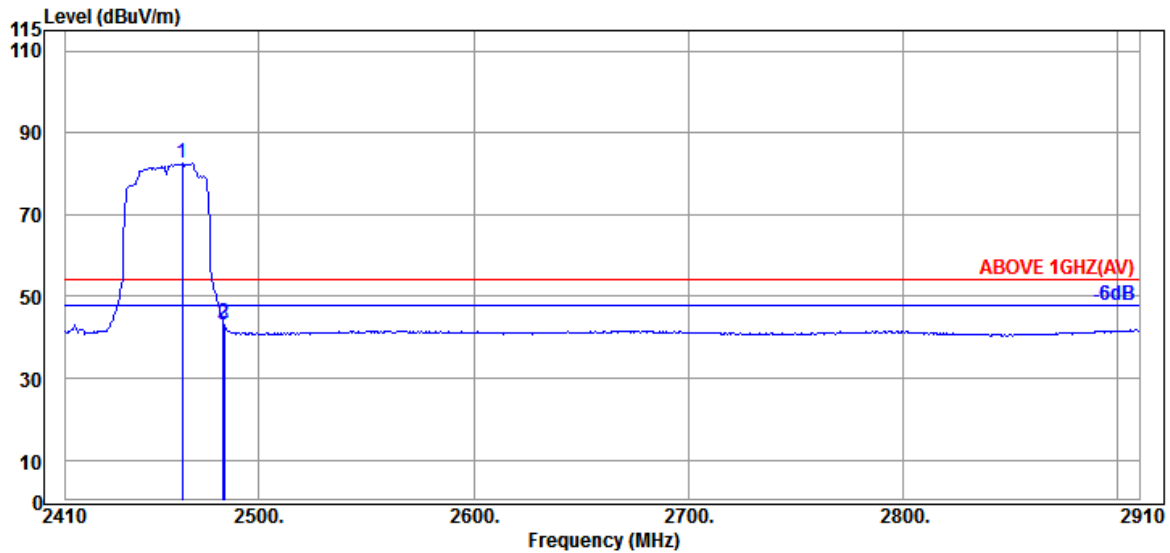


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	27.89	6.15	33.13	81.57	82.48	---	---	Average
2483.500	28.01	6.18	33.11	42.47	43.55	54.00	10.45	Average
2484.000	28.01	6.18	33.11	41.90	42.98	54.00	11.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

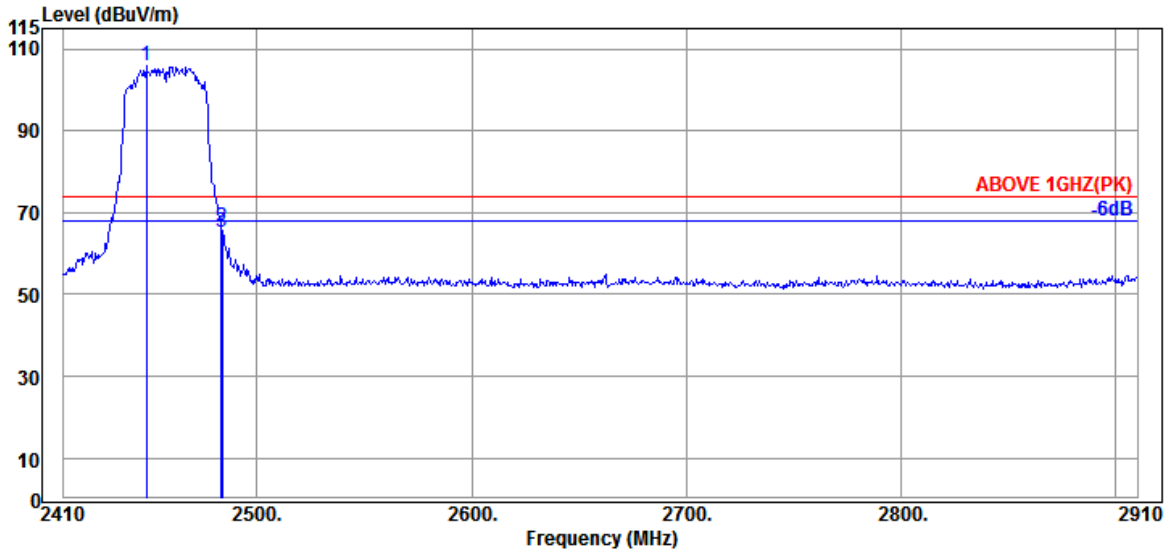

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.500	27.80	6.13	33.15	105.02	105.80	---	---	Peak
2483.500	28.01	6.18	33.11	65.13	66.21	74.00	7.79	Peak
2484.000	28.01	6.18	33.11	64.22	65.30	74.00	8.70	Peak

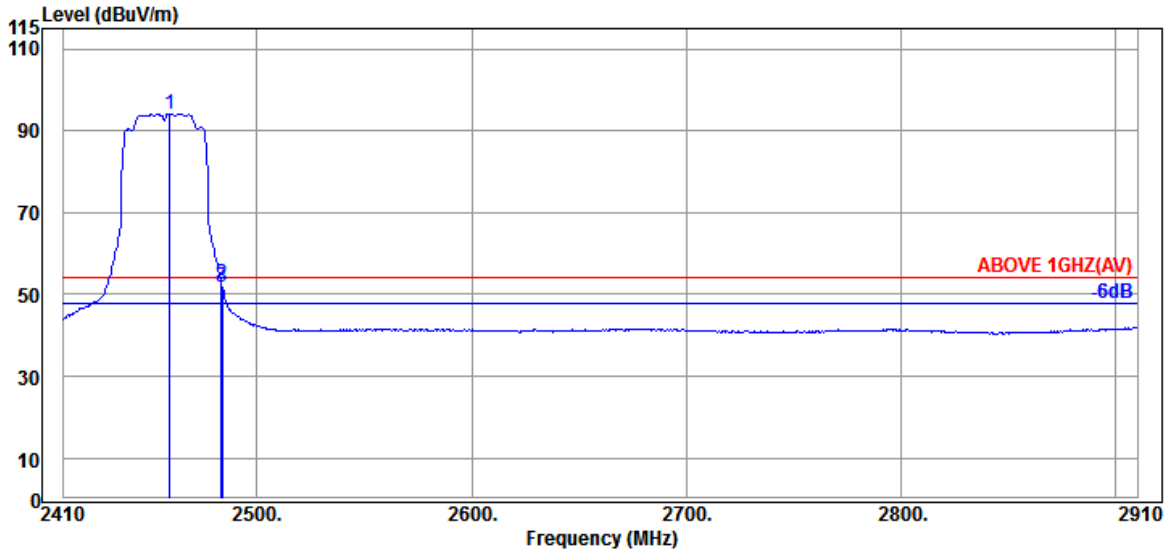


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.500	27.84	6.15	33.13	93.26	94.12	---	---	Average
2483.500	28.01	6.18	33.11	51.40	52.48	54.00	1.52	Average
2484.000	28.01	6.18	33.11	50.67	51.75	54.00	2.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

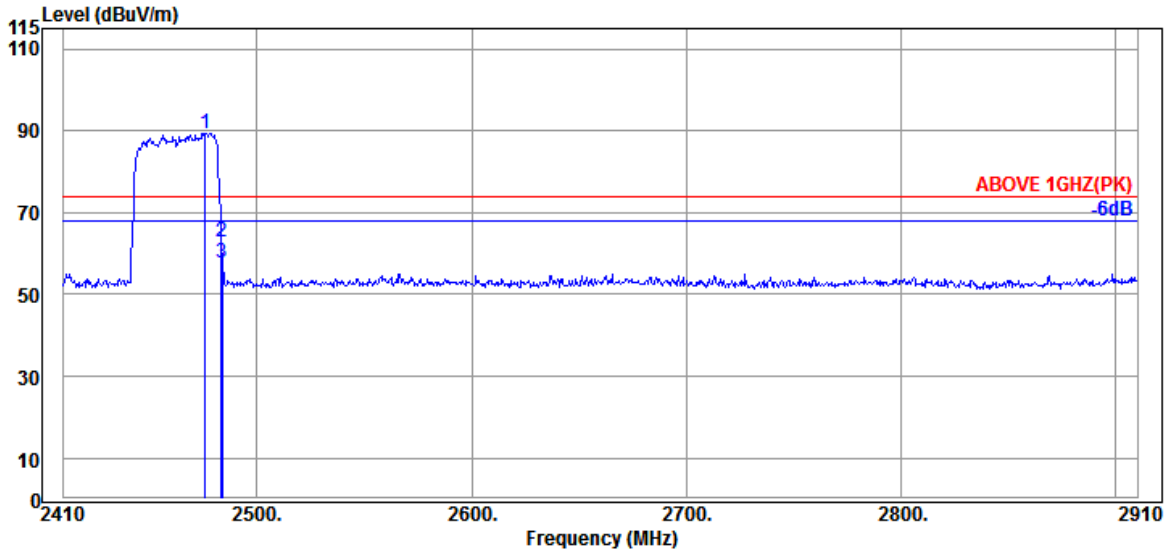

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	27.97	6.18	33.12	88.39	89.42	---	---	Peak
2483.500	28.01	6.18	33.11	61.85	62.93	74.00	11.07	Peak
2484.000	28.01	6.18	33.11	56.75	57.83	74.00	16.17	Peak

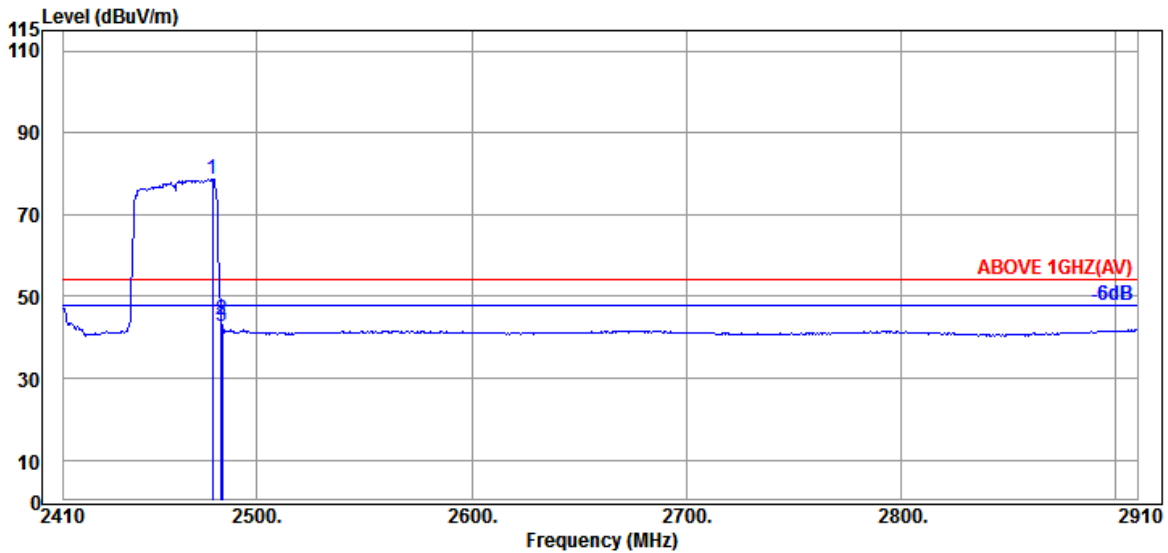


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	27.97	6.18	33.12	77.77	78.80	---	---	Average
2483.500	28.01	6.18	33.11	43.15	44.23	54.00	9.77	Average
2484.000	28.01	6.18	33.11	41.46	42.54	54.00	11.46	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

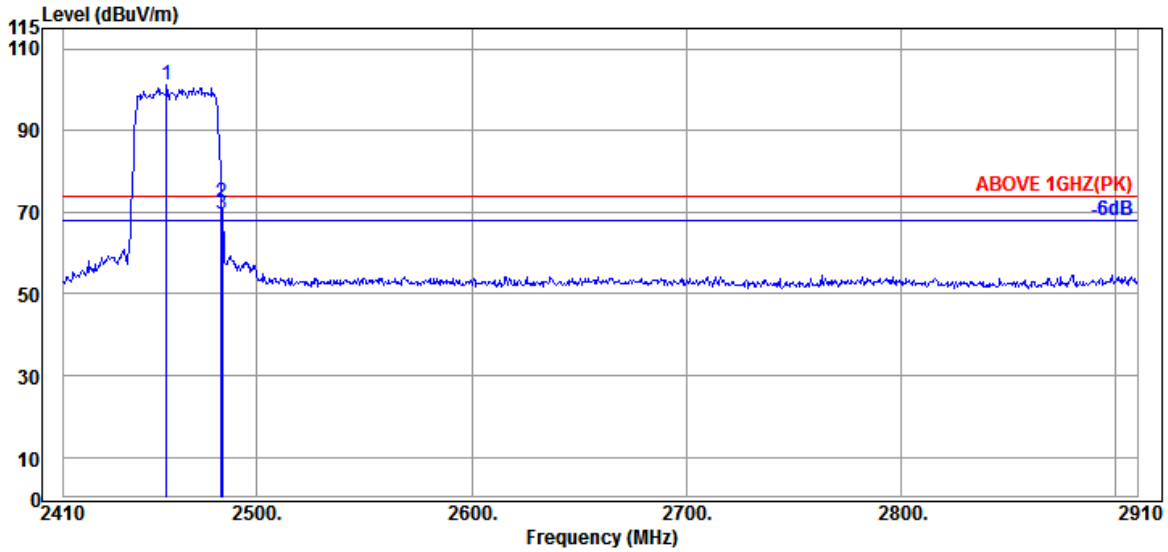

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	27.84	6.15	33.14	100.20	101.05	---	---	Peak
2483.500	28.01	6.18	33.11	71.13	72.21	74.00	1.79	Peak
2484.000	28.01	6.18	33.11	68.54	69.62	74.00	4.38	Peak

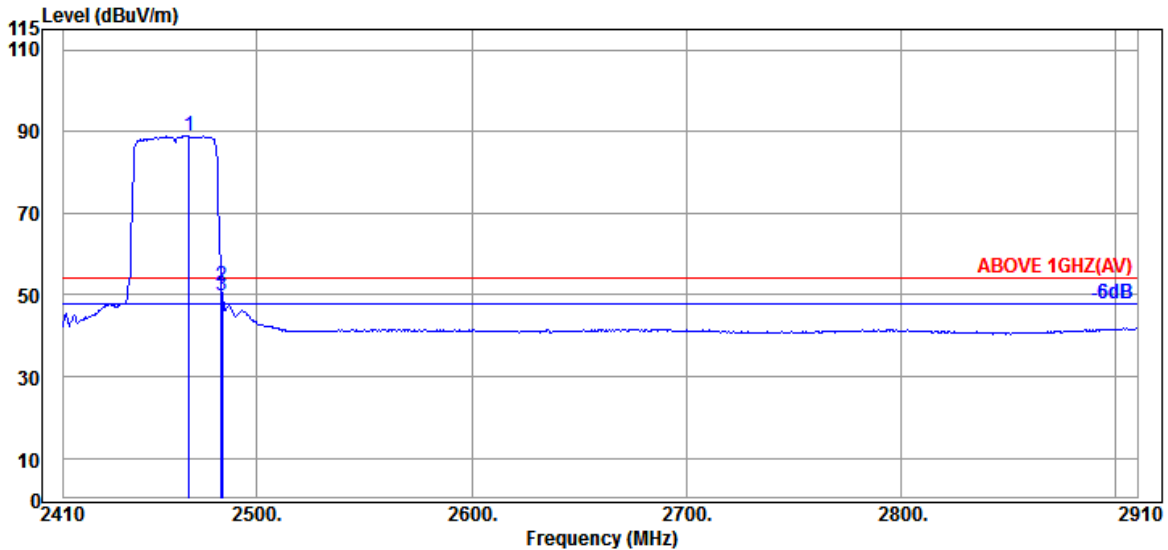


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	27.93	6.15	33.13	87.98	88.93	---	---	Average
2483.500	28.01	6.18	33.11	51.20	52.28	54.00	1.72	Average
2484.000	28.01	6.18	33.11	48.79	49.87	54.00	4.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

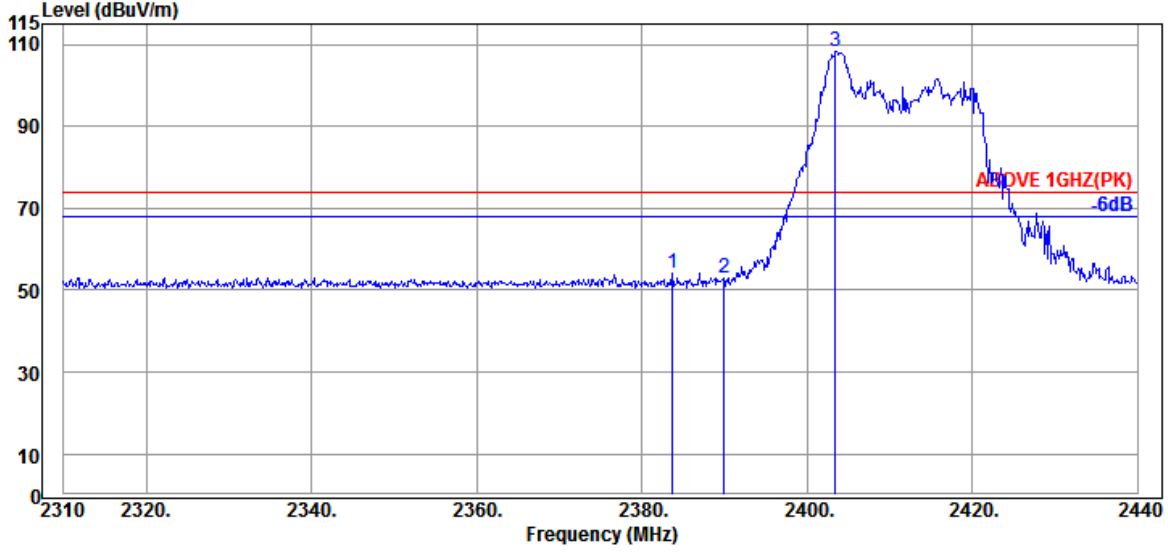

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.710	27.57	6.01	33.20	53.88	54.26	74.00	19.74	Peak
2389.950	27.57	6.04	33.19	52.41	52.83	74.00	21.17	Peak
@ 2403.470	27.60	6.07	33.18	107.83	108.32	---	---	Peak

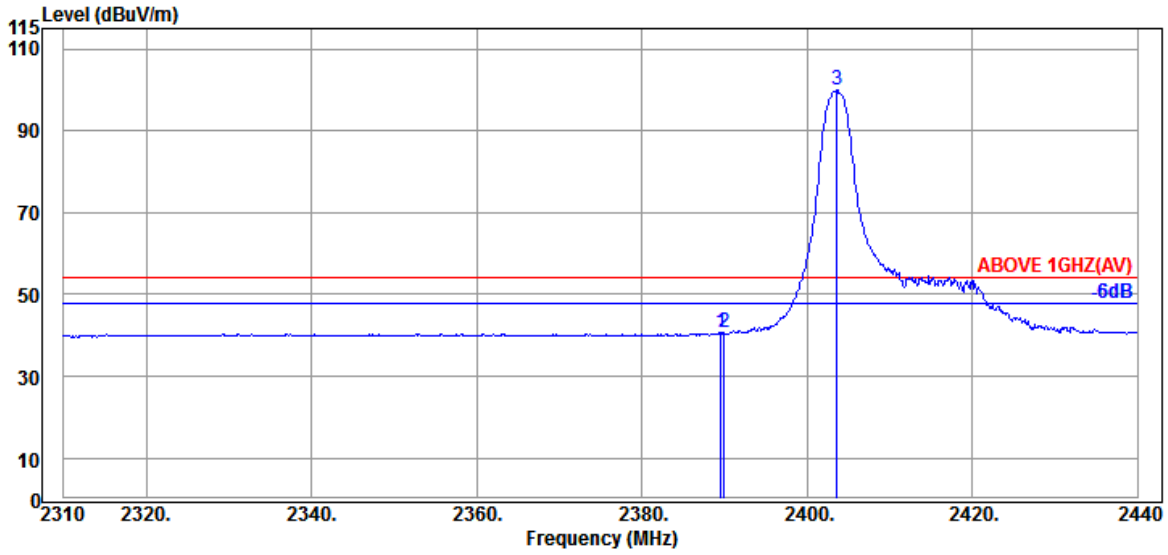


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	40.25	40.67	54.00	13.33	Average
2389.950	27.57	6.04	33.19	40.30	40.72	54.00	13.28	Average
@ 2403.600	27.60	6.07	33.18	99.41	99.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

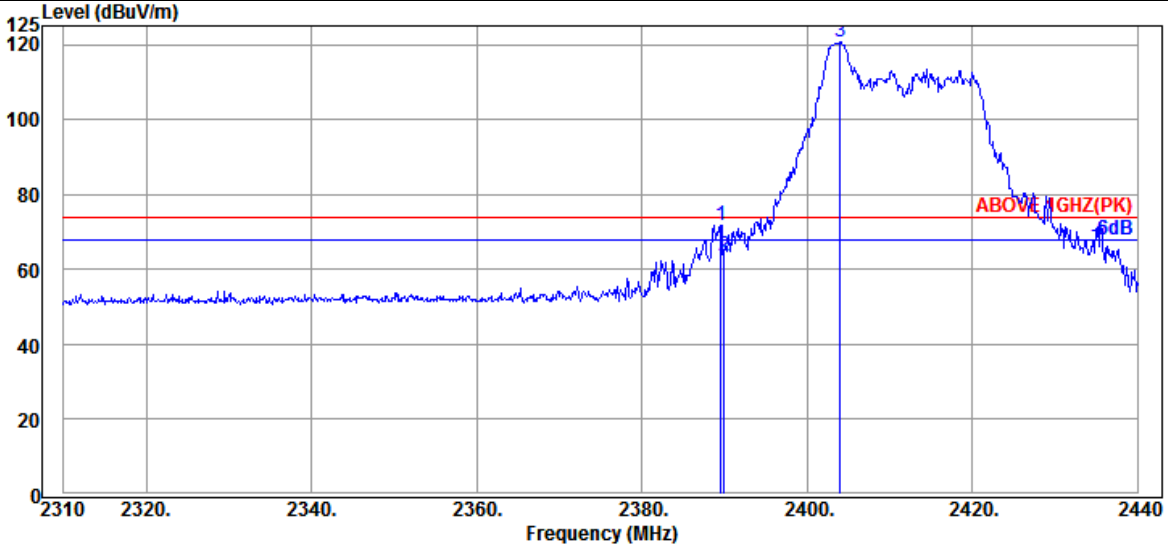

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	71.23	71.65	74.00	2.35	Peak
2389.950	27.57	6.04	33.19	63.36	63.78	74.00	10.22	Peak
@ 2403.990	27.60	6.07	33.18	120.11	120.60	---	---	Peak

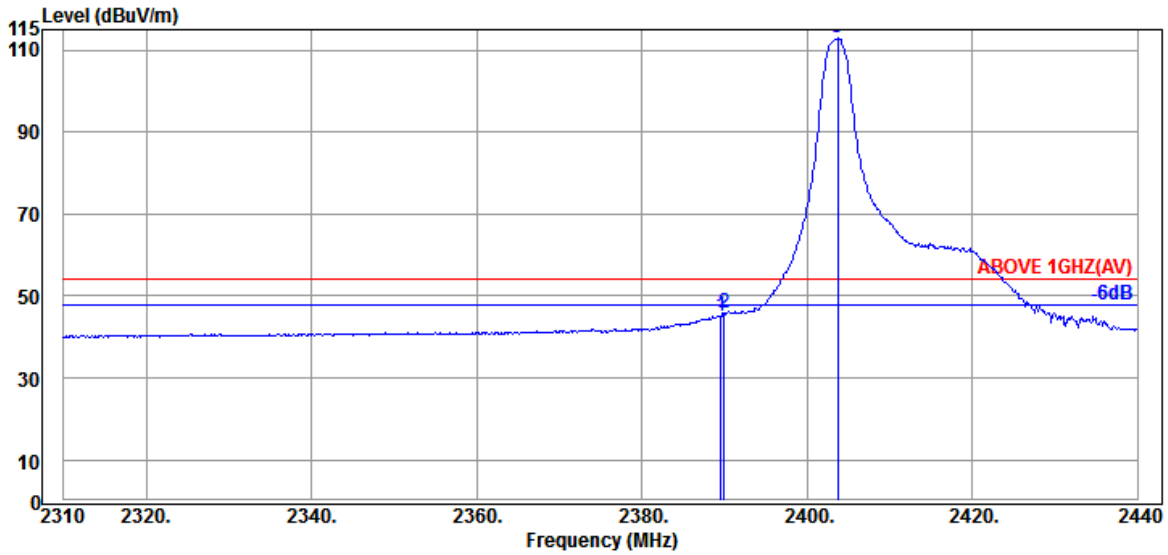


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	44.73	45.15	54.00	8.85	Average
2389.950	27.57	6.04	33.19	45.43	45.85	54.00	8.15	Average
@ 2403.730	27.60	6.07	33.18	112.34	112.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

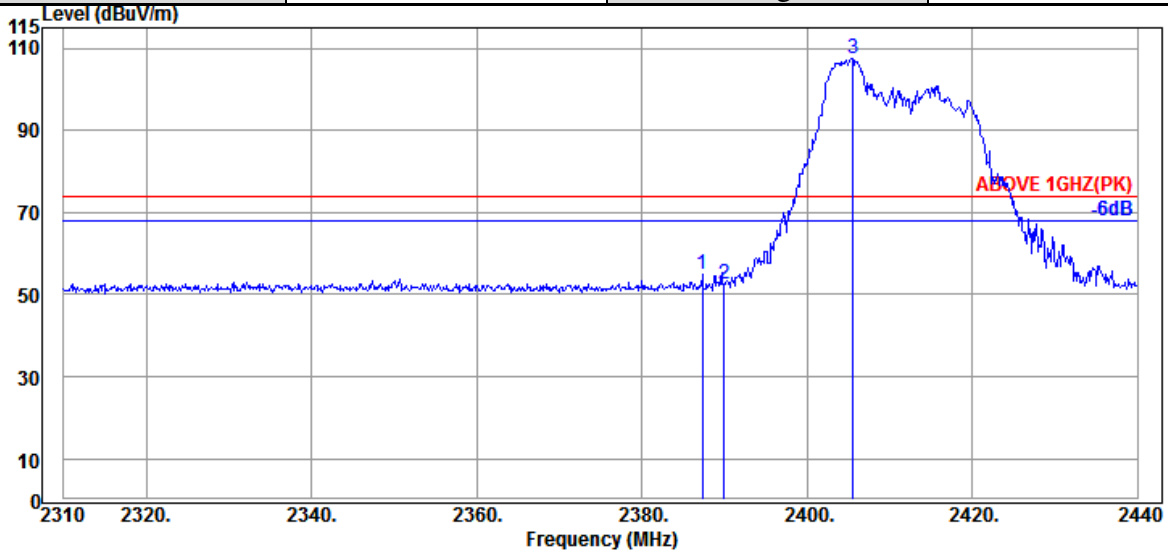

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.350	27.57	6.04	33.19	54.43	54.85	74.00	19.15	Peak
2389.950	27.57	6.04	33.19	51.98	52.40	74.00	21.60	Peak
@ 2405.550	27.63	6.07	33.18	107.05	107.57	---	---	Peak

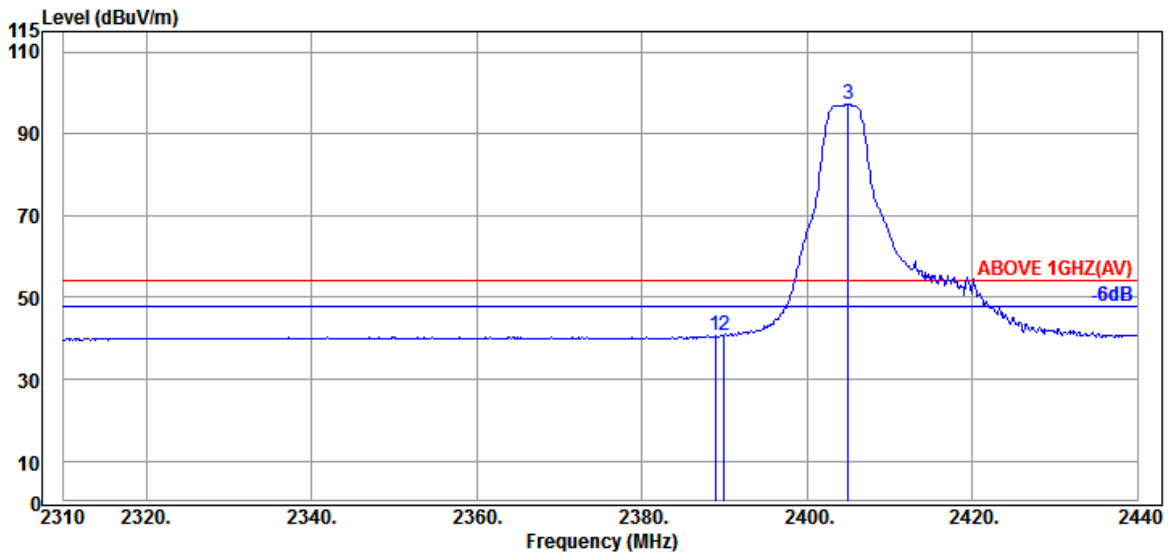


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.910	27.57	6.04	33.19	40.17	40.59	54.00	13.41	Average
2389.950	27.57	6.04	33.19	40.38	40.80	54.00	13.20	Average
@ 2405.030	27.63	6.07	33.18	96.75	97.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

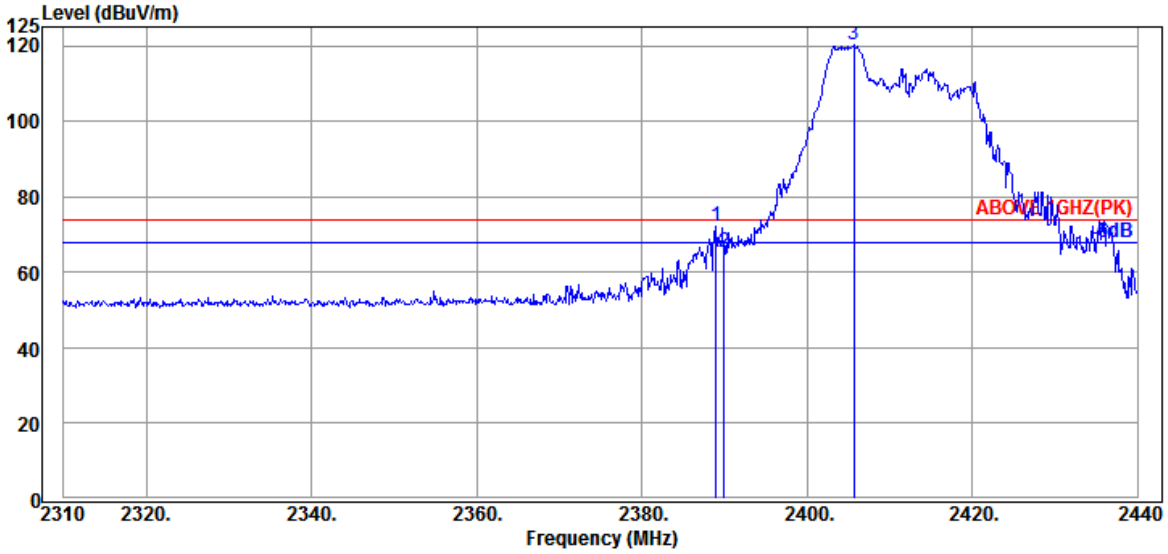

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.040	27.57	6.04	33.19	71.77	72.19	74.00	1.81	Peak
2389.950	27.57	6.04	33.19	64.92	65.34	74.00	8.66	Peak
@ 2405.680	27.63	6.07	33.18	119.89	120.41	---	---	Peak

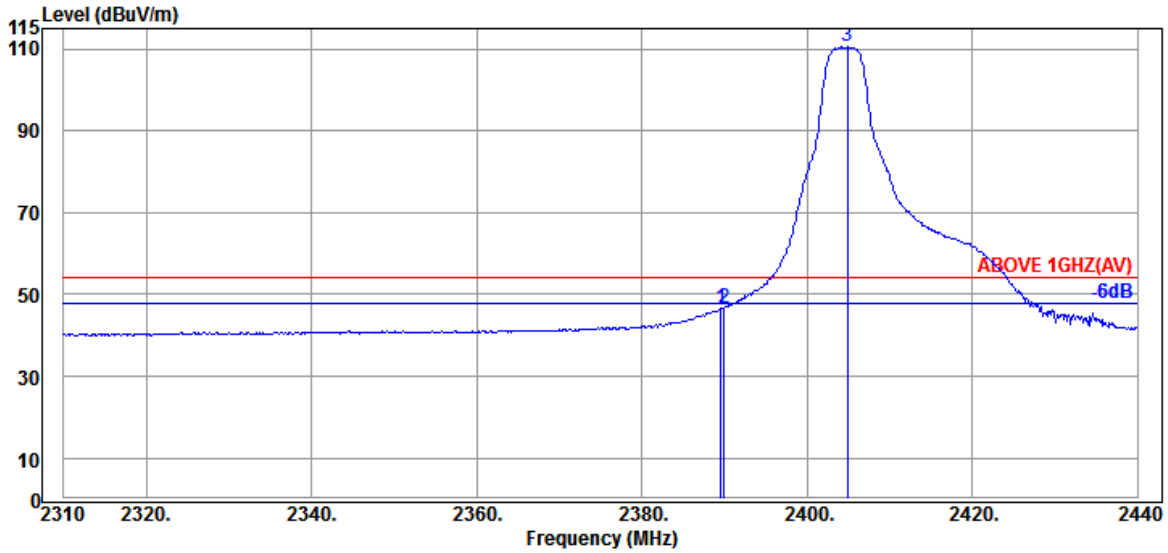


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.560	27.57	6.04	33.19	46.12	46.54	54.00	7.46	Average
2389.950	27.57	6.04	33.19	46.35	46.77	54.00	7.23	Average
@ 2404.900	27.63	6.07	33.18	109.98	110.50	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

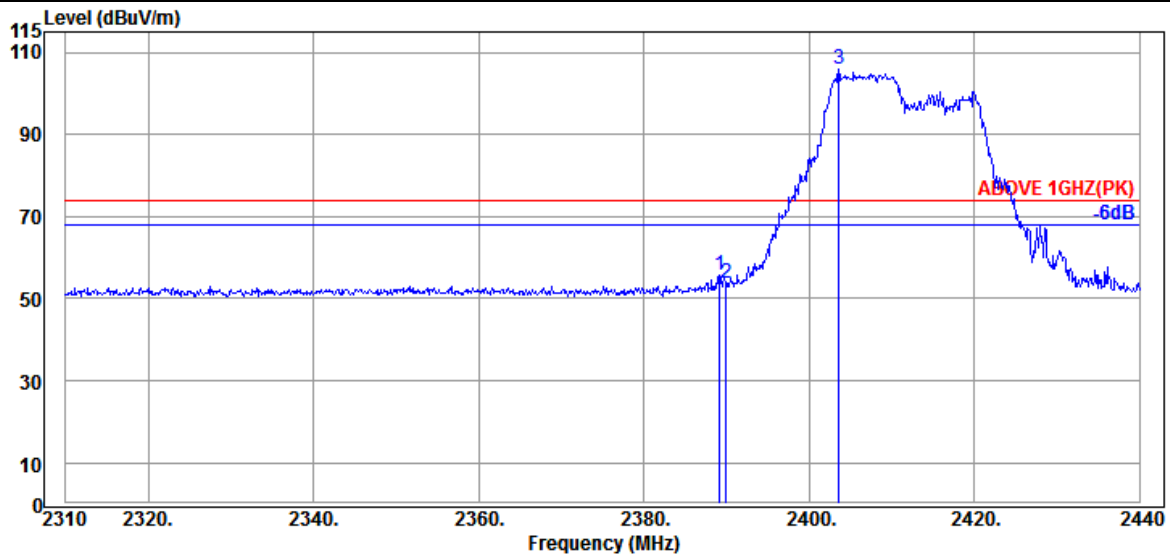

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.170	27.57	6.04	33.19	55.49	55.91	74.00	18.09	Peak
2389.950	27.57	6.04	33.19	53.47	53.89	74.00	20.11	Peak
@ 2403.600	27.60	6.07	33.18	105.23	105.72	---	---	Peak

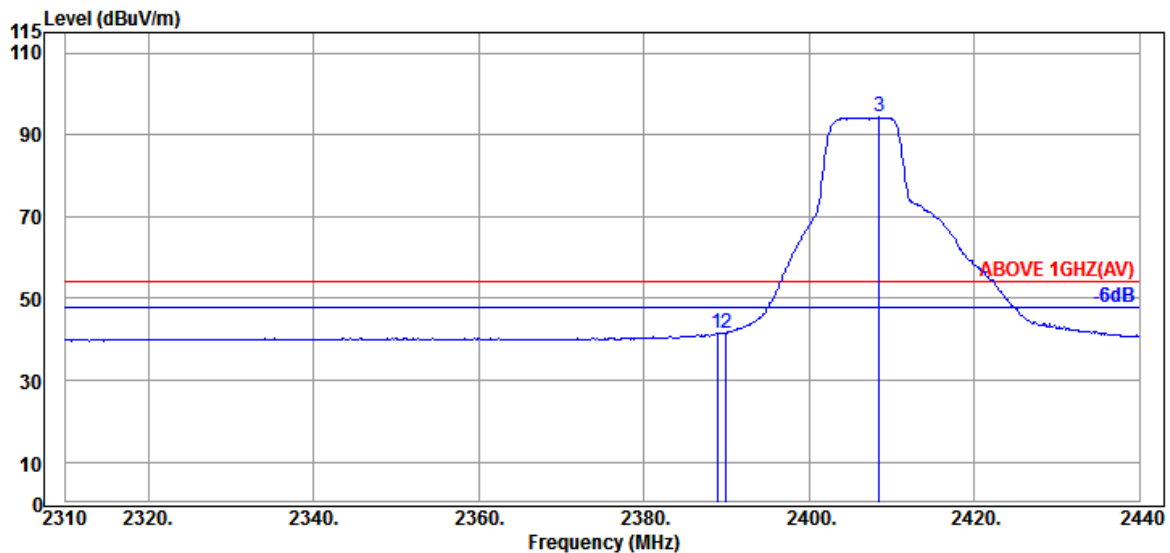


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.910	27.57	6.04	33.19	41.12	41.54	54.00	12.46	Average
2389.950	27.57	6.04	33.19	41.20	41.62	54.00	12.38	Average
@ 2408.540	27.63	6.07	33.18	93.81	94.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

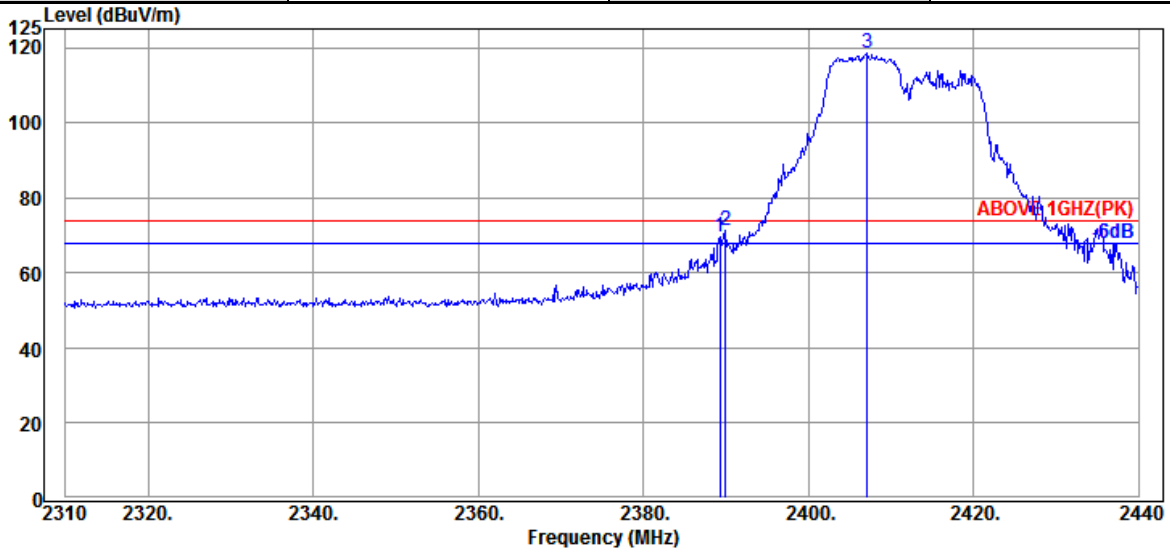

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	27.57	6.04	33.19	69.06	69.48	74.00	4.52	Peak
2389.950	27.57	6.04	33.19	70.73	71.15	74.00	2.85	Peak
@ 2407.110	27.63	6.07	33.18	118.20	118.72	---	---	Peak

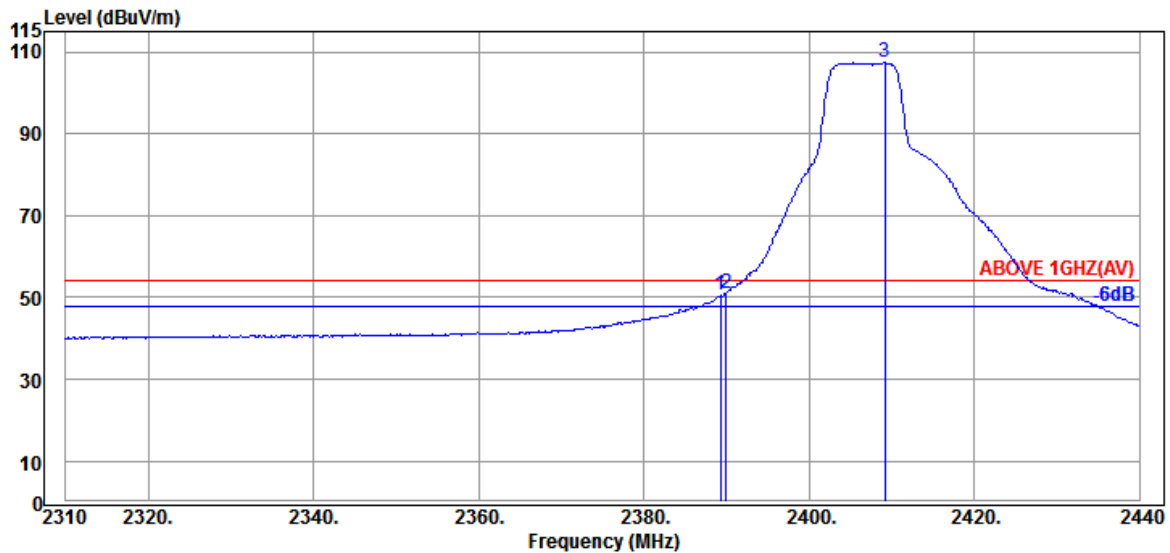


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	27.57	6.04	33.19	50.22	50.64	54.00	3.36	Average
2389.950	27.57	6.04	33.19	50.54	50.96	54.00	3.04	Average
@ 2409.190	27.63	6.07	33.18	106.89	107.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

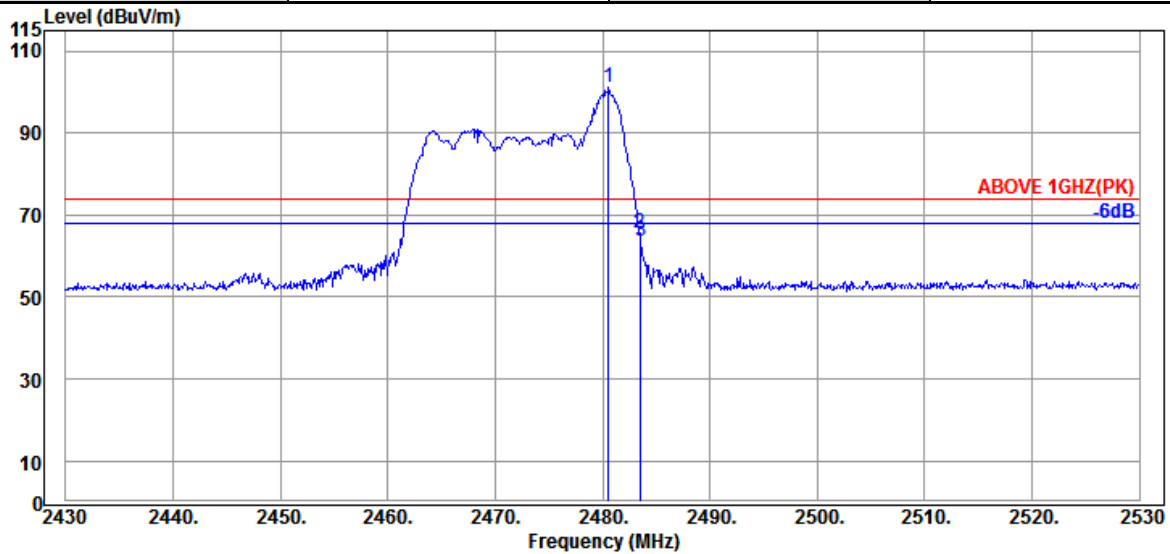

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.600	27.97	6.18	33.12	100.06	101.09	---	---	Peak
2483.500	28.01	6.18	33.11	64.38	65.46	74.00	8.54	Peak
2483.600	28.01	6.18	33.11	62.43	63.51	74.00	10.49	Peak

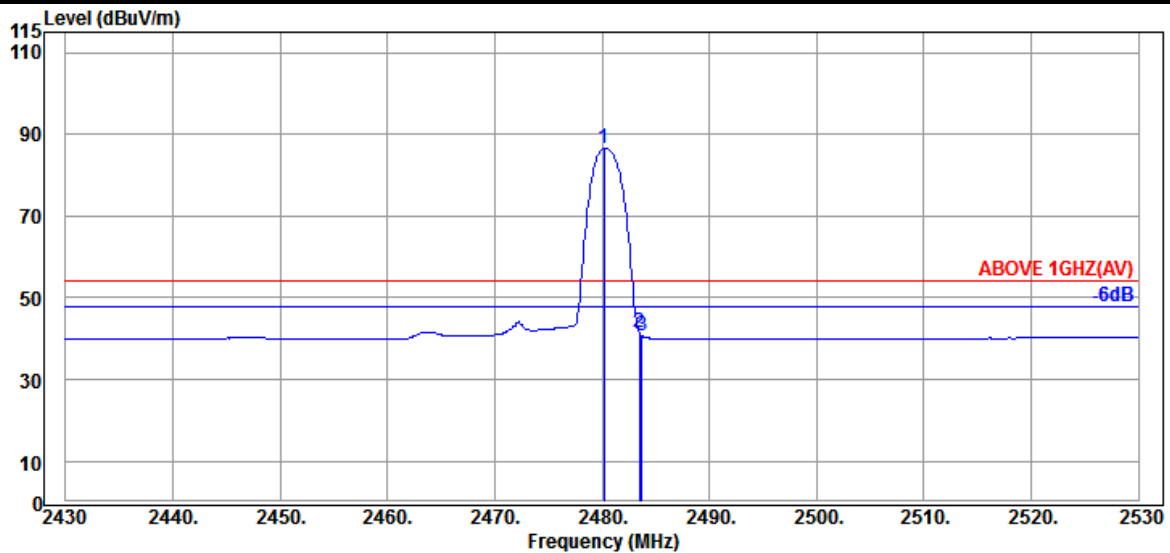


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	27.97	6.18	33.12	85.61	86.64	---	---	Average
2483.500	28.01	6.18	33.11	40.42	41.50	54.00	12.50	Average
2483.700	28.01	6.18	33.11	39.78	40.86	54.00	13.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

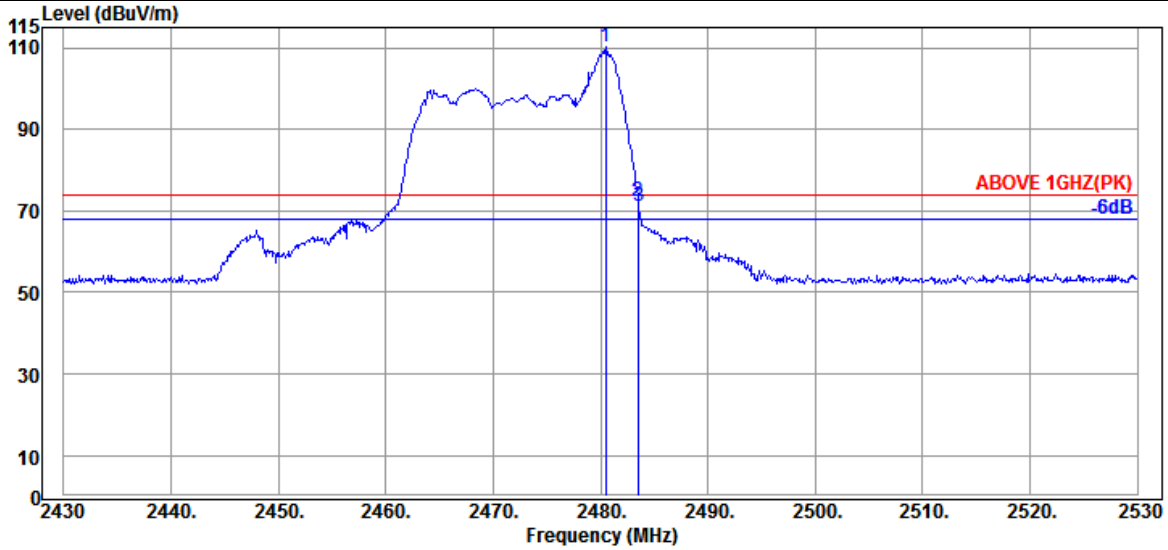

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	27.97	6.18	33.12	109.07	110.10	---	---	Peak
2483.500	28.01	6.18	33.11	71.41	72.49	74.00	1.51	Peak
2483.600	28.01	6.18	33.11	70.10	71.18	74.00	2.82	Peak

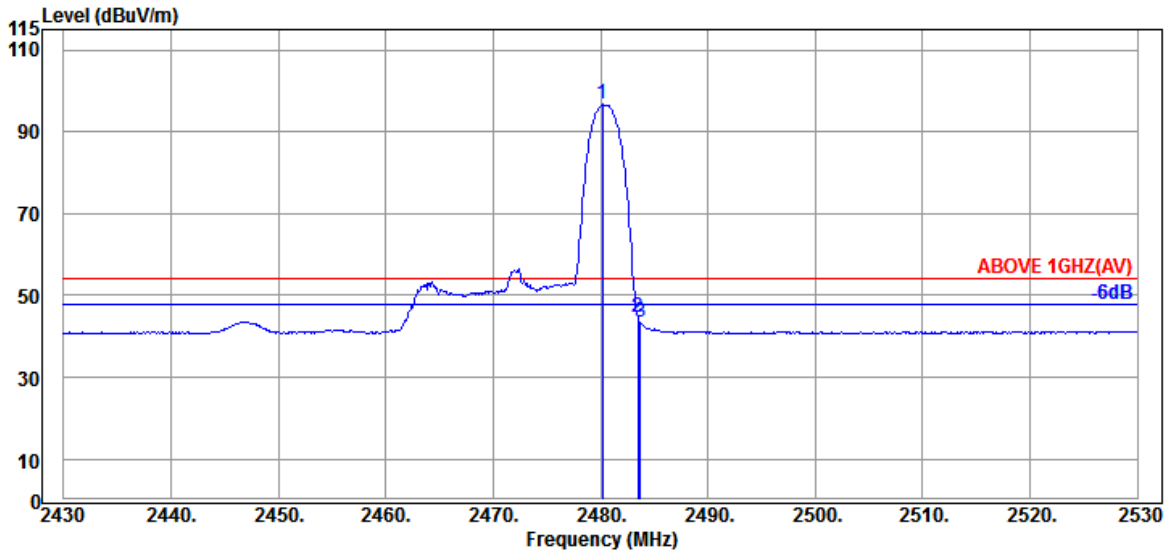


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	27.97	6.18	33.12	95.71	96.74	---	---	Average
2483.500	28.01	6.18	33.11	43.63	44.71	54.00	9.29	Average
2483.700	28.01	6.18	33.11	42.26	43.34	54.00	10.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

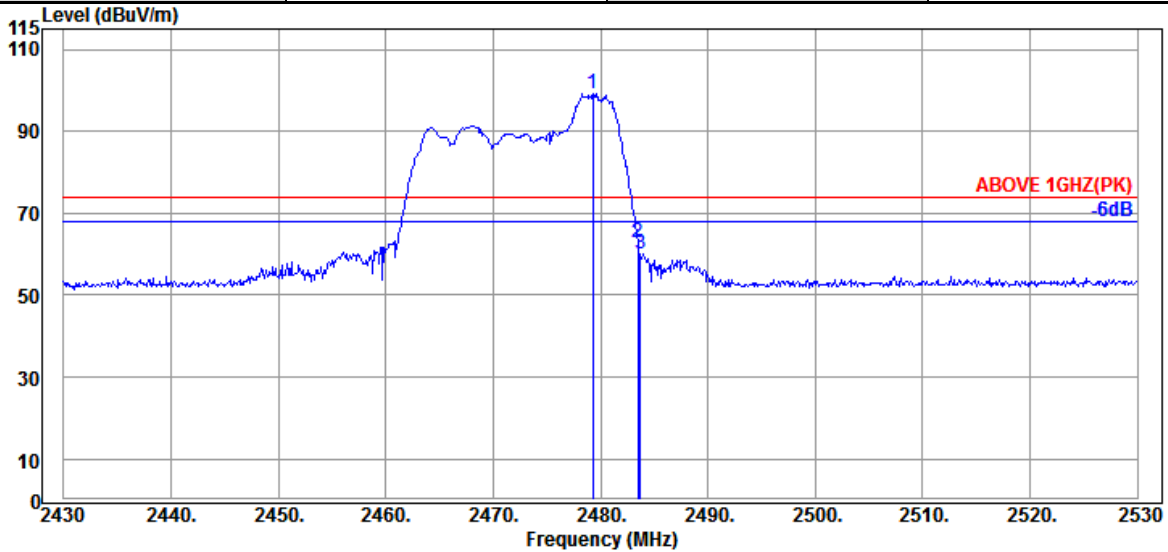

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	27.97	6.18	33.12	98.11	99.14	---	---	Peak
2483.500	28.01	6.18	33.11	61.89	62.97	74.00	11.03	Peak
2483.700	28.01	6.18	33.11	59.07	60.15	74.00	13.85	Peak

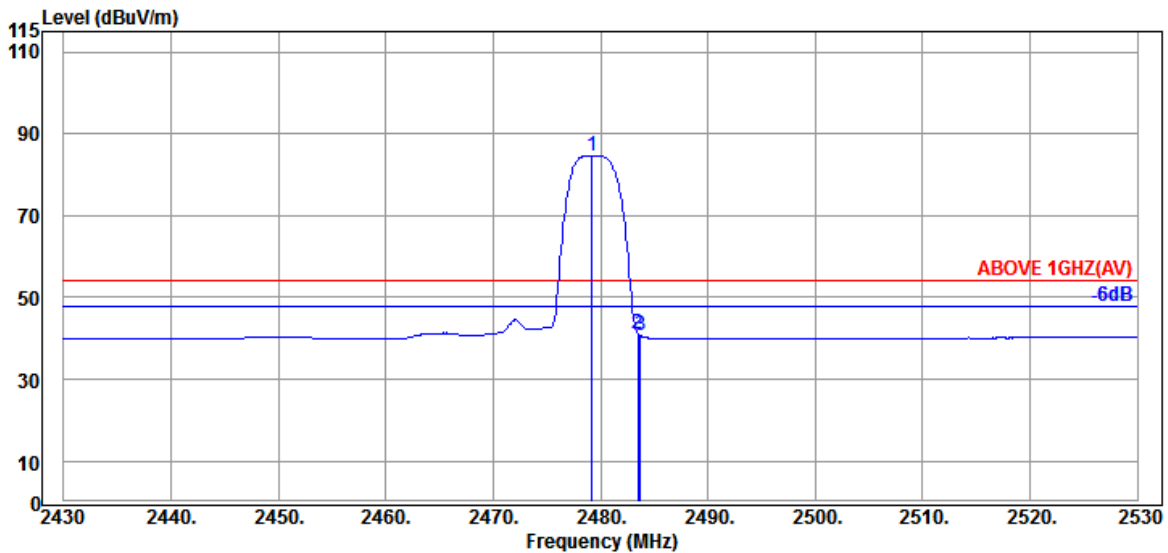


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	27.97	6.18	33.12	83.73	84.76	---	---	Average
2483.500	28.01	6.18	33.11	40.20	41.28	54.00	12.72	Average
2483.700	28.01	6.18	33.11	39.64	40.72	54.00	13.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

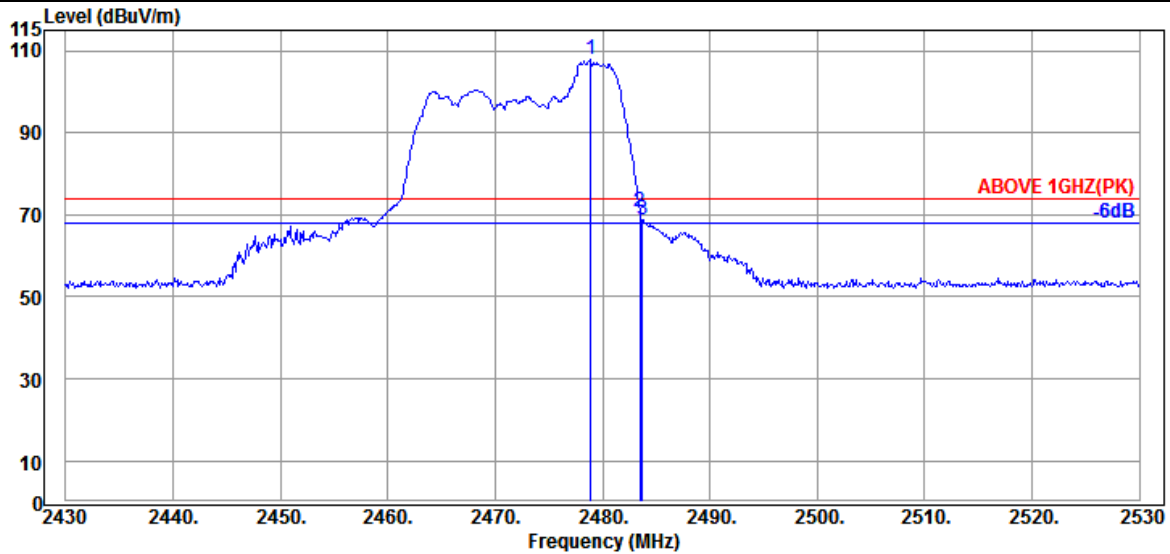

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	27.97	6.18	33.12	106.82	107.85	---	---	Peak
2483.500	28.01	6.18	33.11	69.80	70.88	74.00	3.12	Peak
2483.700	28.01	6.18	33.11	67.84	68.92	74.00	5.08	Peak

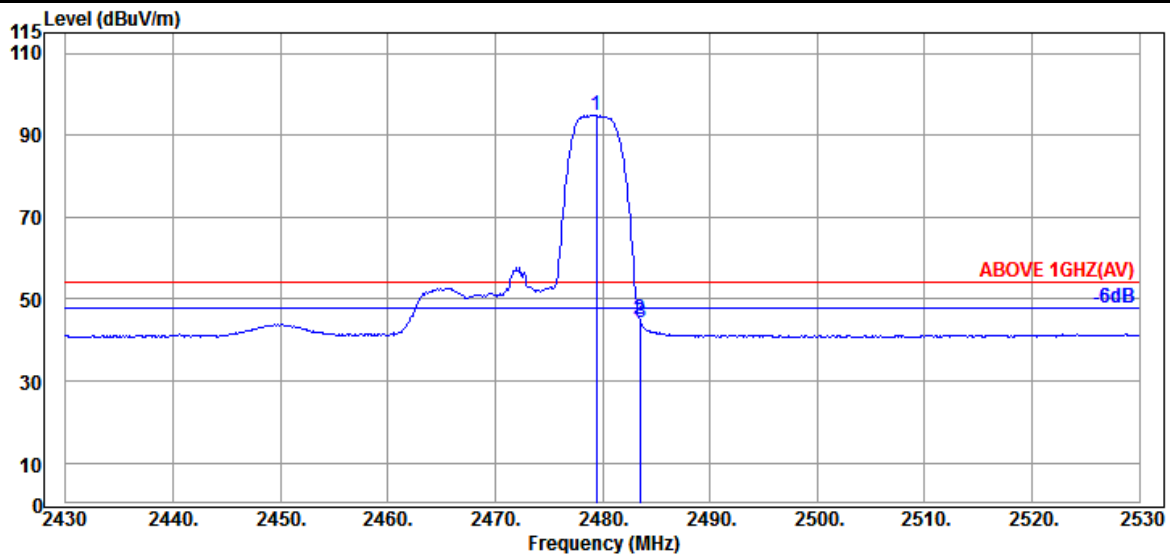


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	27.97	6.18	33.12	93.88	94.91	---	---	Average
2483.500	28.01	6.18	33.11	43.86	44.94	54.00	9.06	Average
2483.600	28.01	6.18	33.11	43.31	44.39	54.00	9.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

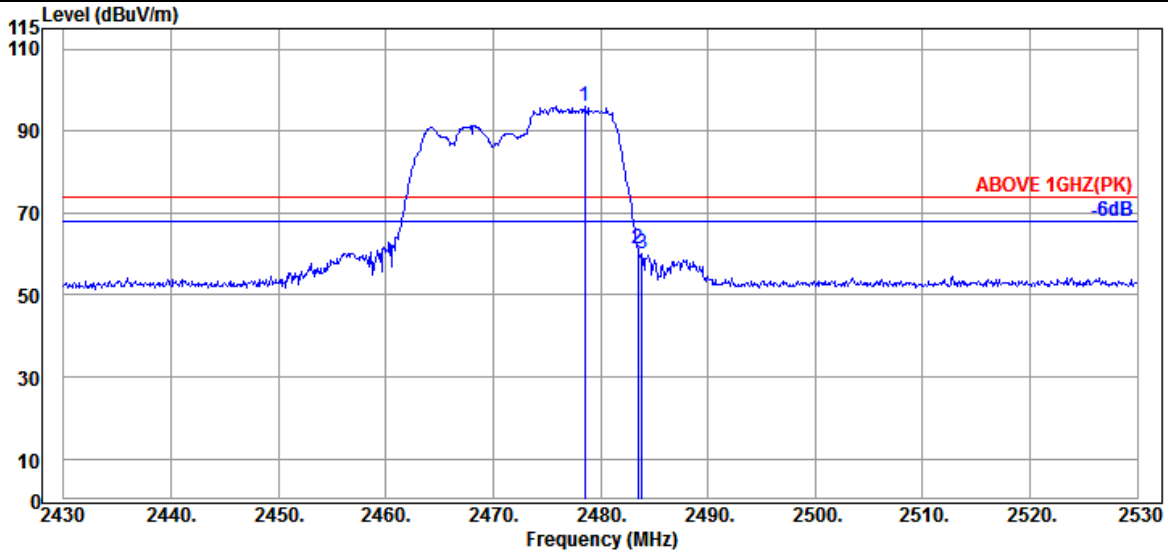

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	27.97	6.18	33.12	94.93	95.96	---	---	Peak
2483.500	28.01	6.18	33.11	60.20	61.28	74.00	12.72	Peak
2483.900	28.01	6.18	33.11	59.07	60.15	74.00	13.85	Peak

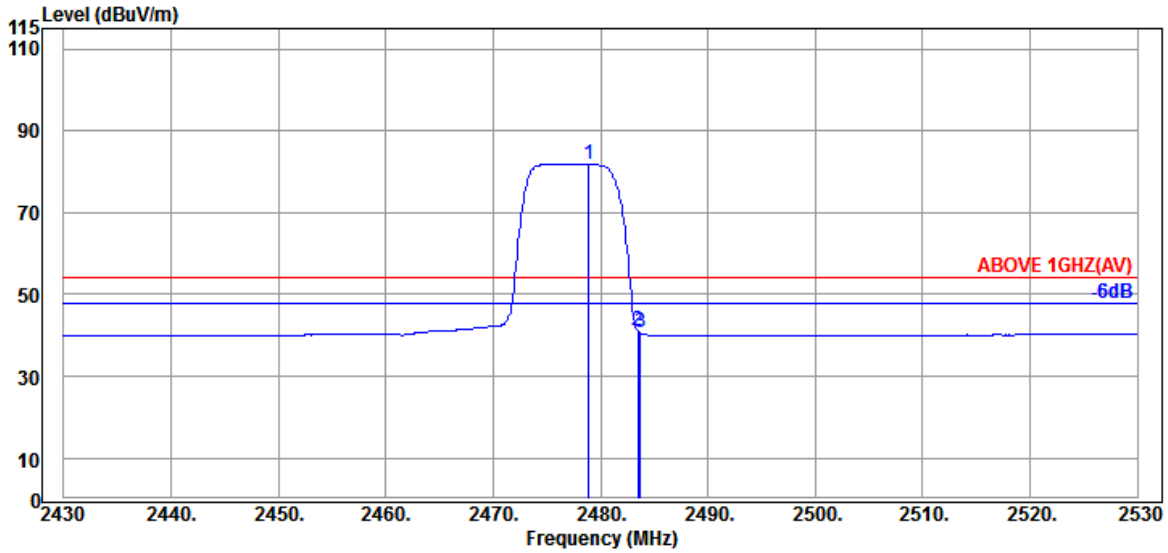


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	27.97	6.18	33.12	80.80	81.83	---	---	Average
2483.500	28.01	6.18	33.11	39.99	41.07	54.00	12.93	Average
2483.700	28.01	6.18	33.11	39.49	40.57	54.00	13.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

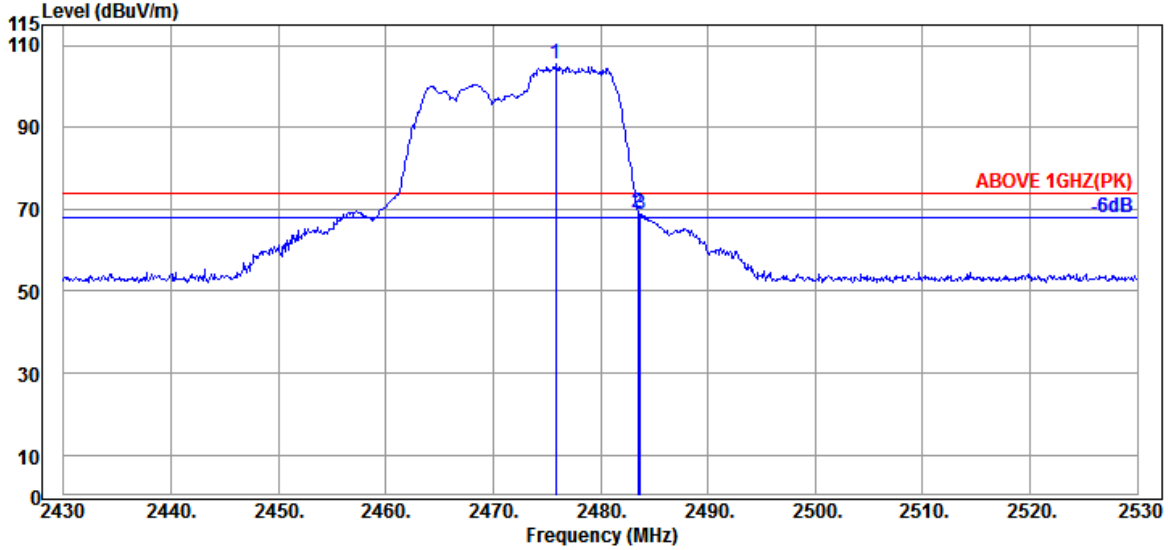

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.800	27.97	6.18	33.12	104.33	105.36	---	---	Peak
2483.500	28.01	6.18	33.11	68.12	69.20	74.00	4.80	Peak
2483.700	28.01	6.18	33.11	67.74	68.82	74.00	5.18	Peak

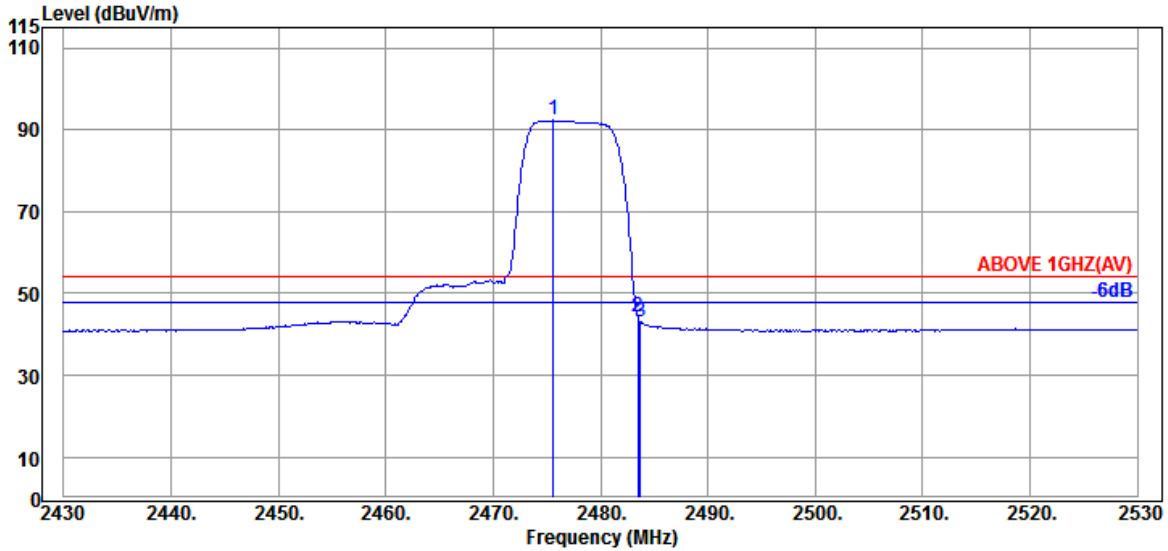


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.600	27.97	6.18	33.12	91.32	92.35	---	---	Average
2483.500	28.01	6.18	33.11	43.27	44.35	54.00	9.65	Average
2483.700	28.01	6.18	33.11	42.18	43.26	54.00	10.74	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

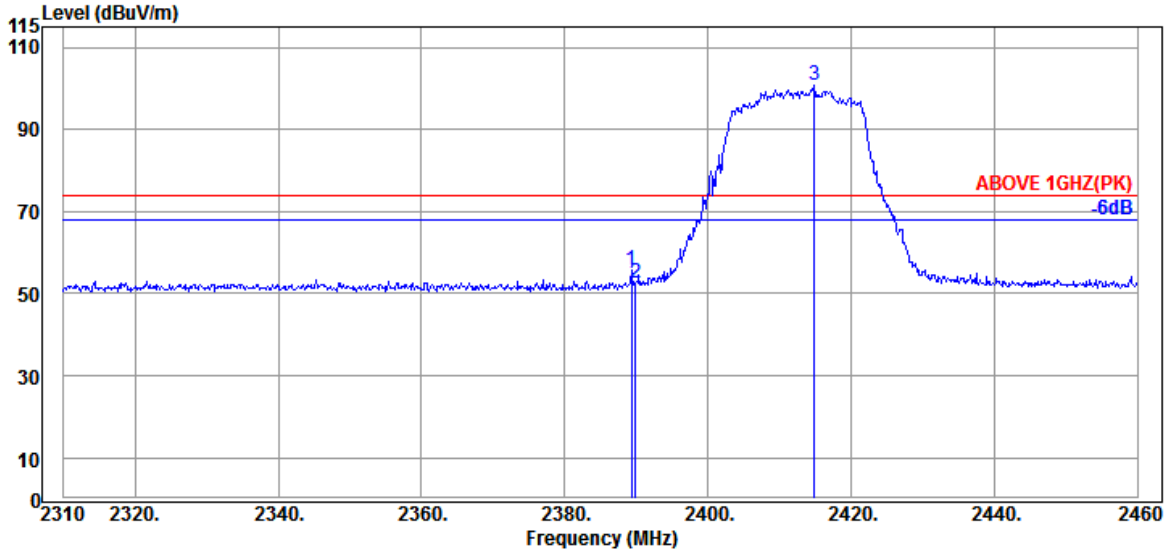

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	27.57	6.04	33.19	55.11	55.53	74.00	18.47	Peak
2389.950	27.57	6.04	33.19	52.08	52.50	74.00	21.50	Peak
@ 2414.850	27.66	6.07	33.17	100.06	100.62	---	---	Peak

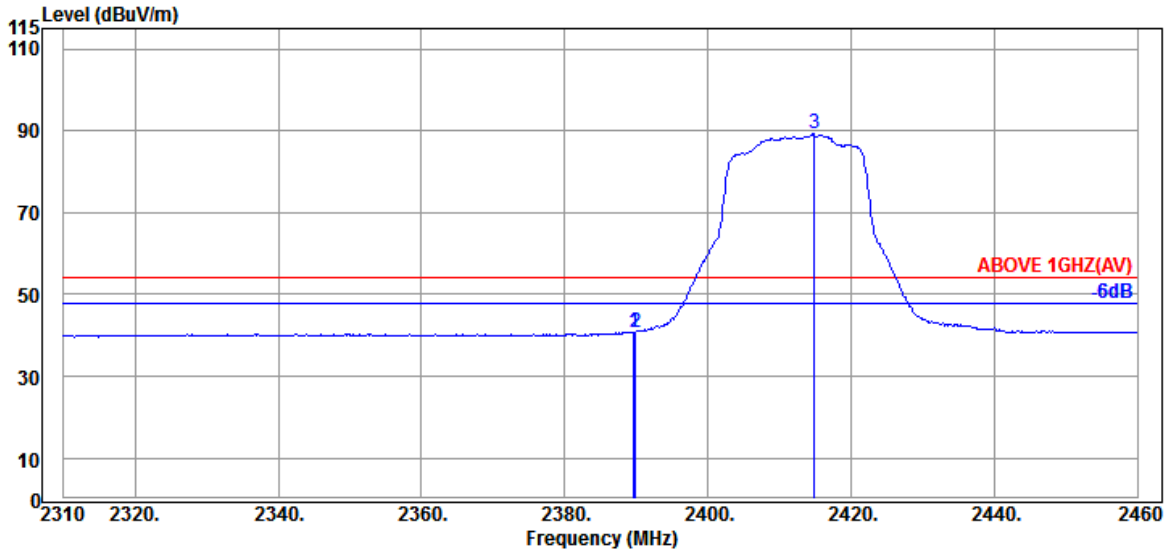


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	27.57	6.04	33.19	40.43	40.85	54.00	13.15	Average
2389.950	27.57	6.04	33.19	40.43	40.85	54.00	13.15	Average
@ 2414.850	27.66	6.07	33.17	88.69	89.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

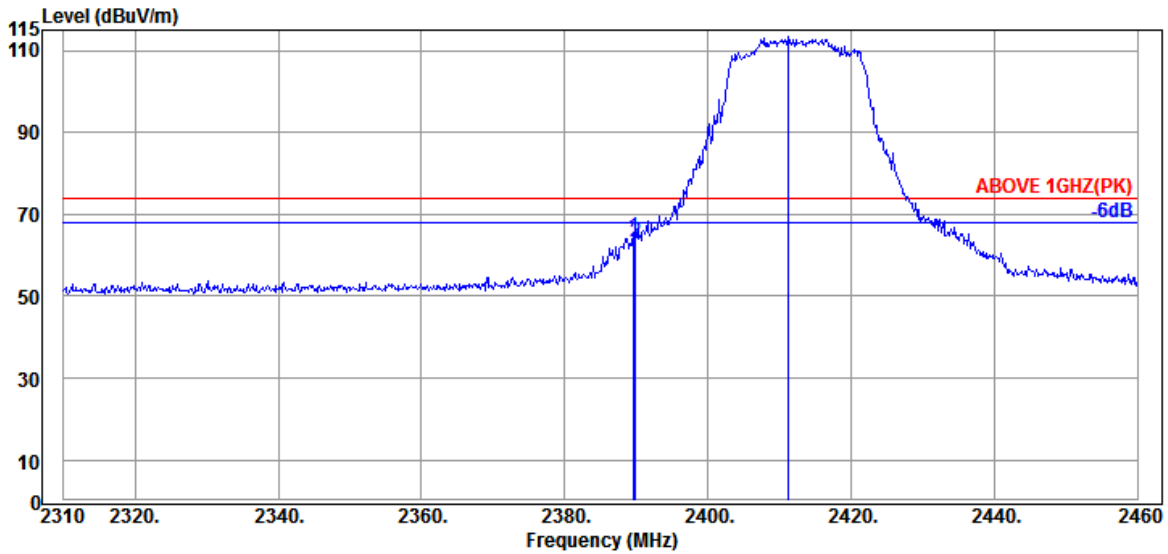

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	27.57	6.04	33.19	64.02	64.44	74.00	9.56	Peak
2389.950	27.57	6.04	33.19	62.65	63.07	74.00	10.93	Peak
@ 2411.250	27.66	6.07	33.17	112.66	113.22	---	---	Peak

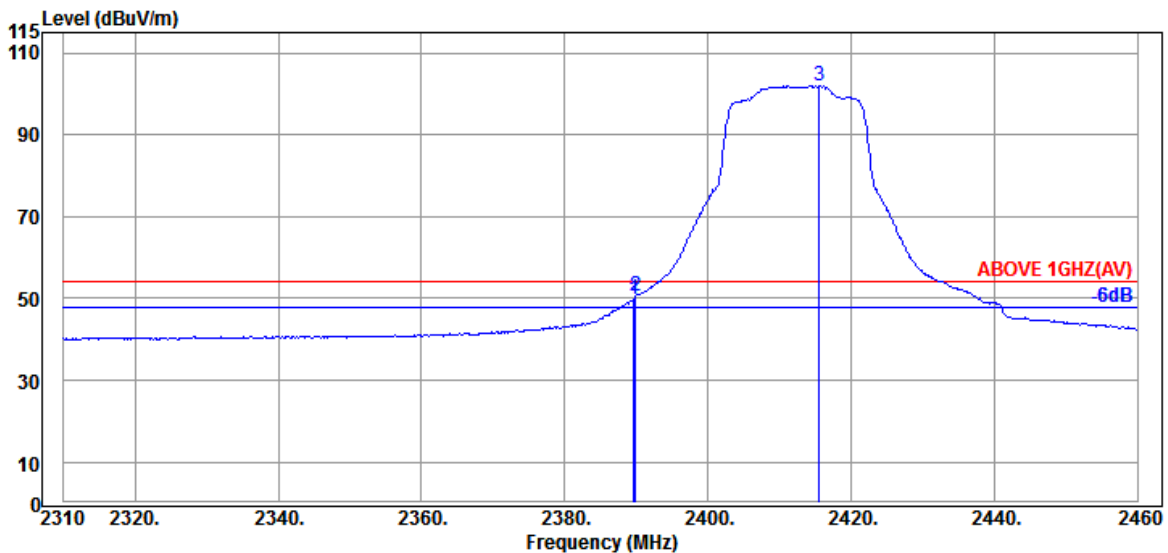


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	27.57	6.04	33.19	49.33	49.75	54.00	4.25	Average
2389.950	27.57	6.04	33.19	50.01	50.43	54.00	3.57	Average
@ 2415.600	27.66	6.07	33.17	101.44	102.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

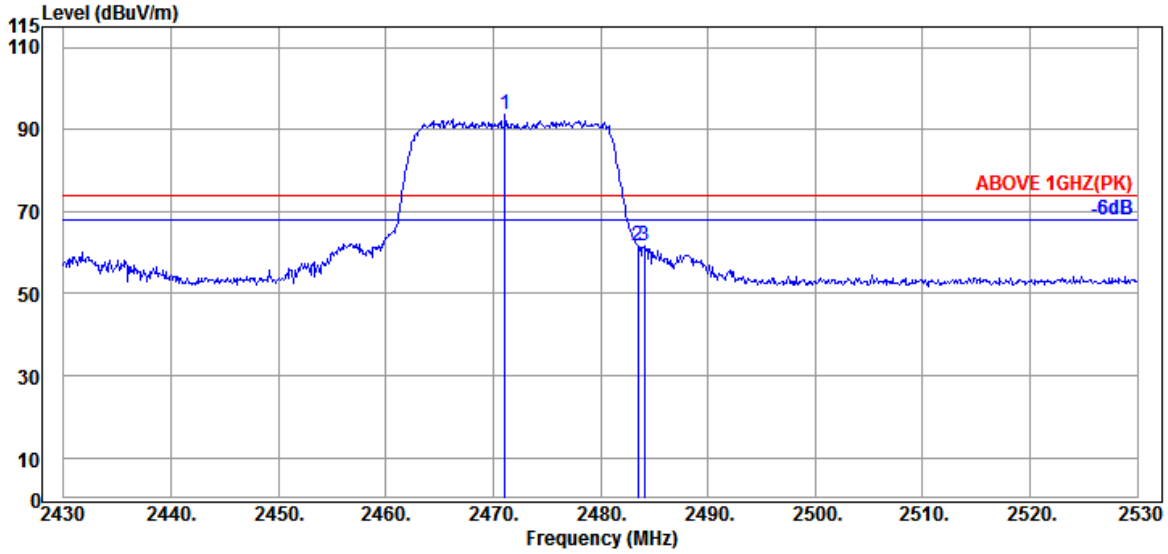

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.100	27.93	6.18	33.13	92.59	93.57	---	---	Peak
2483.500	28.01	6.18	33.11	60.71	61.79	74.00	12.21	Peak
2484.100	28.01	6.18	33.11	60.76	61.84	74.00	12.16	Peak

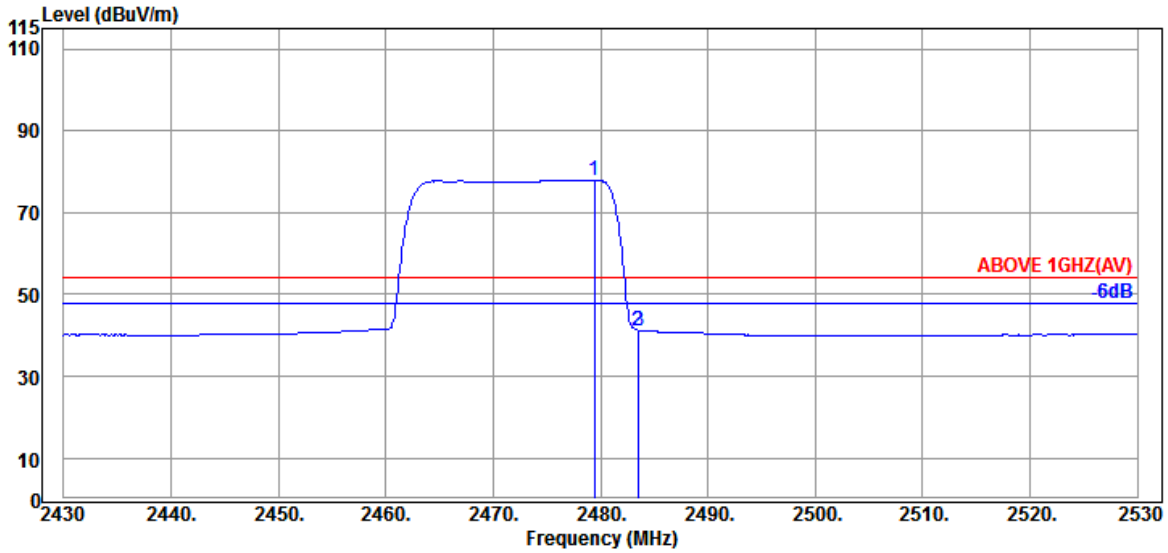


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	27.97	6.18	33.12	76.95	77.98	---	---	Average
2483.500	28.01	6.18	33.11	40.17	41.25	54.00	12.75	Average
2483.600	28.01	6.18	33.11	40.11	41.19	54.00	12.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

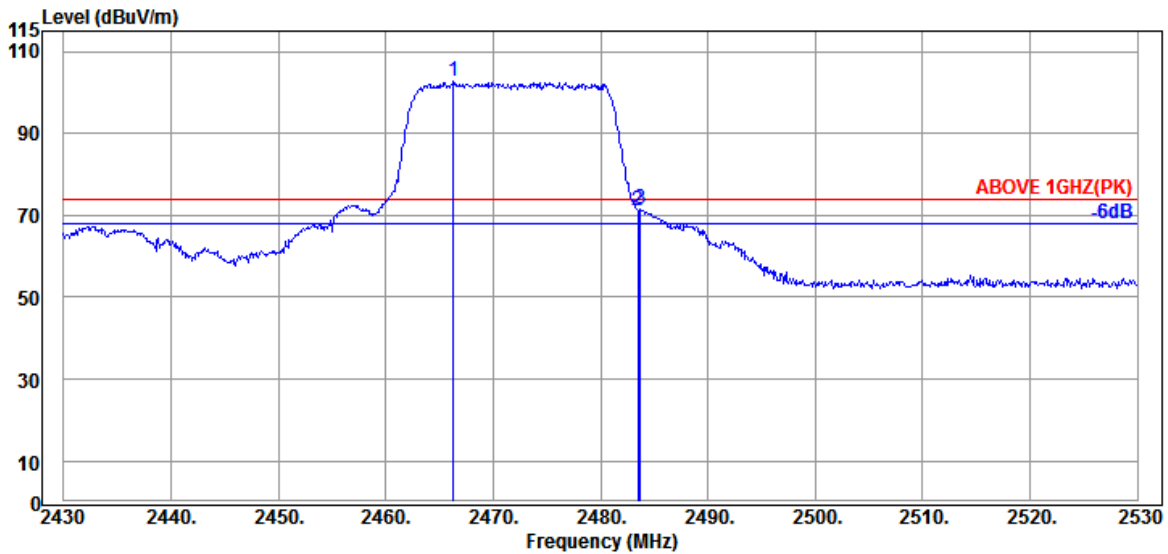

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	27.89	6.15	33.13	101.65	102.56	---	---	Peak
2483.500	28.01	6.18	33.11	70.22	71.30	74.00	2.70	Peak
2483.700	28.01	6.18	33.11	70.38	71.46	74.00	2.54	Peak

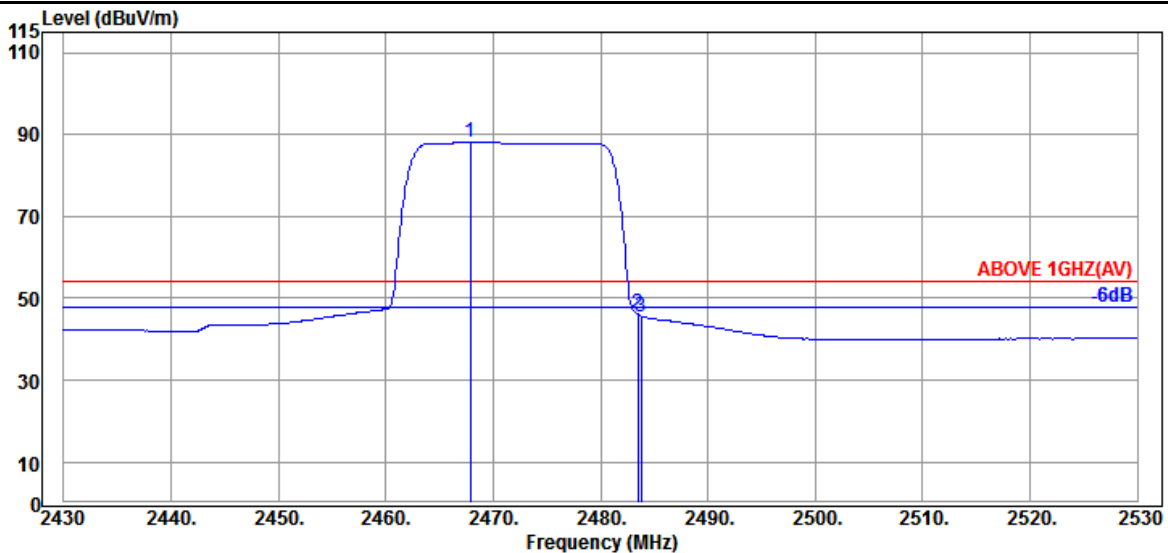


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.900	27.93	6.15	33.13	87.24	88.19	---	---	Average
2483.500	28.01	6.18	33.11	45.00	46.08	54.00	7.92	Average
2483.800	28.01	6.18	33.11	44.53	45.61	54.00	8.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

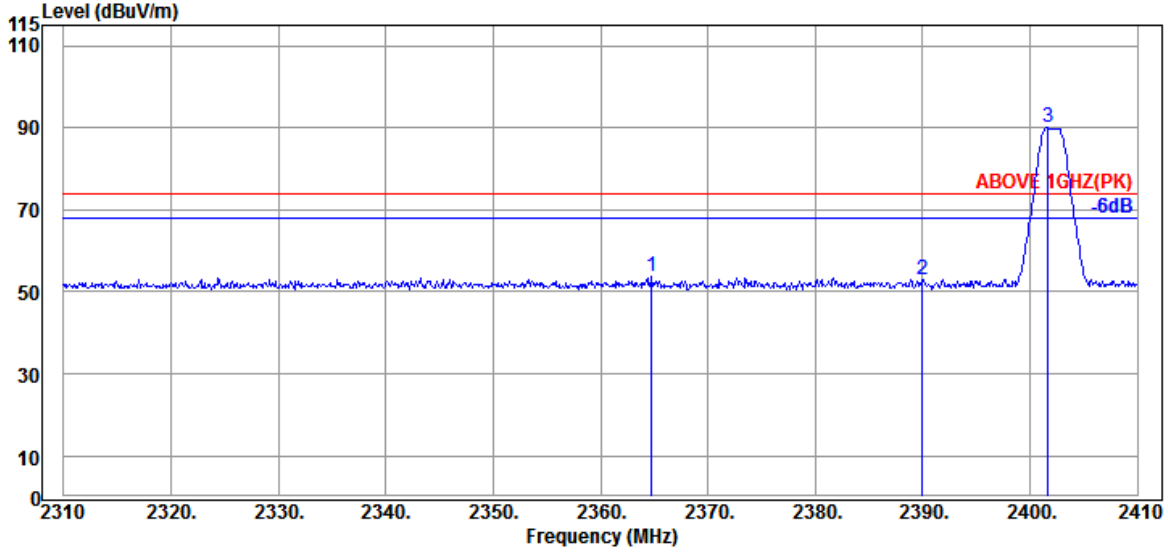

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2364.800	27.53	5.98	33.21	53.27	53.57	74.00	20.43	Peak
2390.000	27.57	6.04	33.19	52.54	52.96	74.00	21.04	Peak
@ 2401.700	27.60	6.04	33.19	89.59	90.04	---	---	Peak

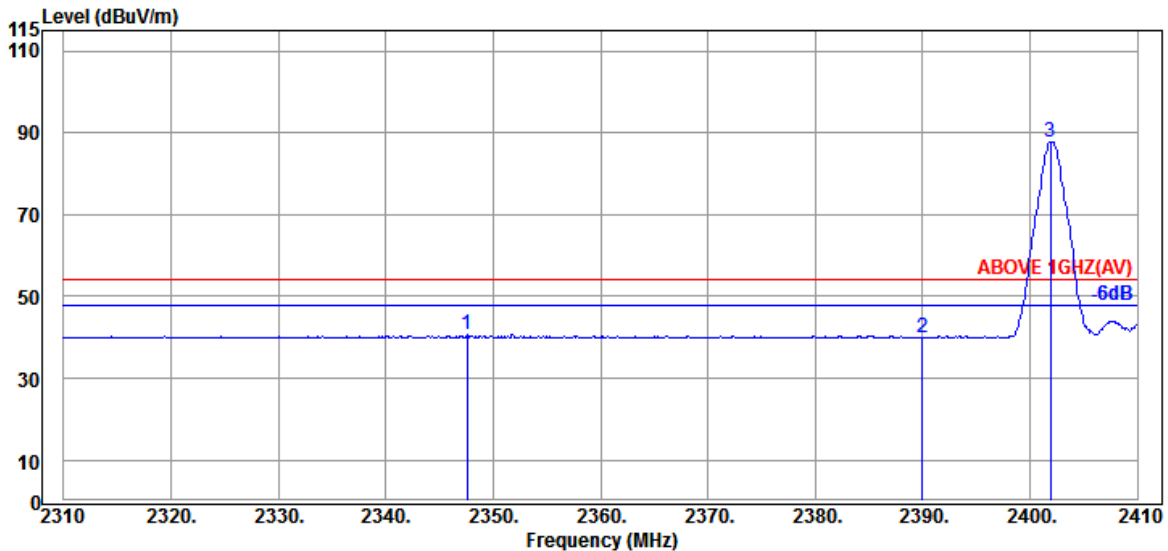


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2347.600	27.50	5.96	33.23	40.36	40.59	54.00	13.41	Average
2390.000	27.57	6.04	33.19	39.52	39.94	54.00	14.06	Average
@ 2401.900	27.60	6.04	33.19	87.32	87.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

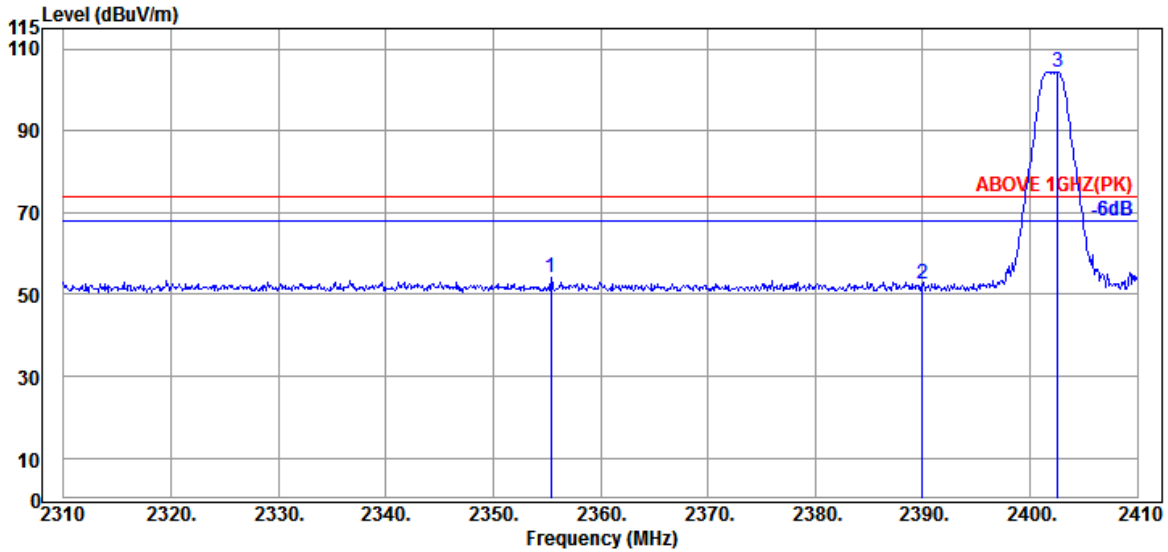

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2355.400	27.50	5.98	33.23	53.84	54.09	74.00	19.91	Peak
2390.000	27.57	6.04	33.19	52.19	52.61	74.00	21.39	Peak
@ 2402.600	27.60	6.07	33.19	103.93	104.41	---	---	Peak

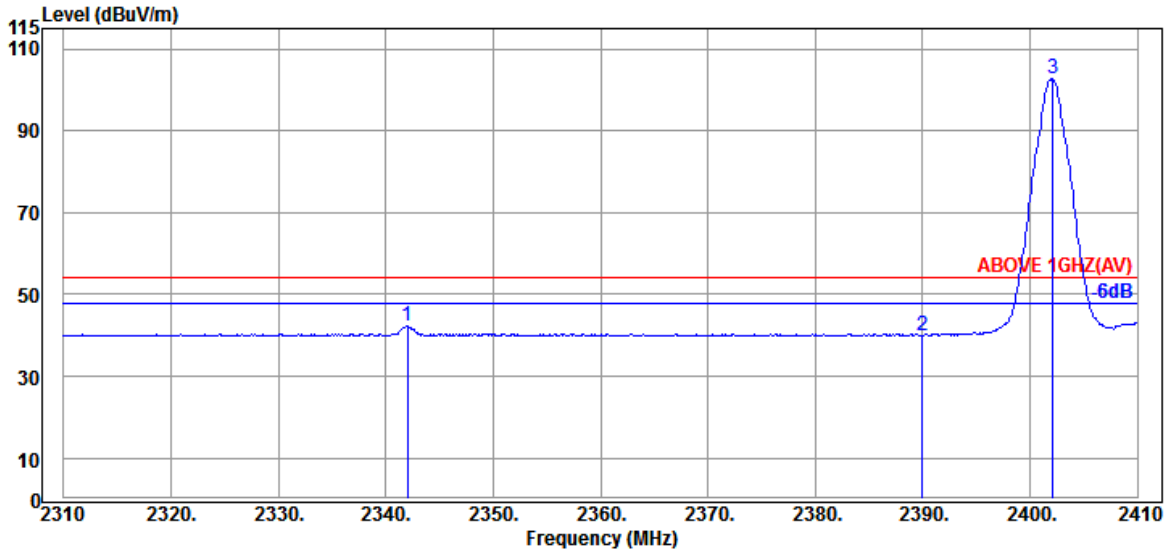


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	27.50	5.96	33.23	41.99	42.22	54.00	11.78	Average
2390.000	27.57	6.04	33.19	39.63	40.05	54.00	13.95	Average
@ 2402.100	27.60	6.04	33.19	102.30	102.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

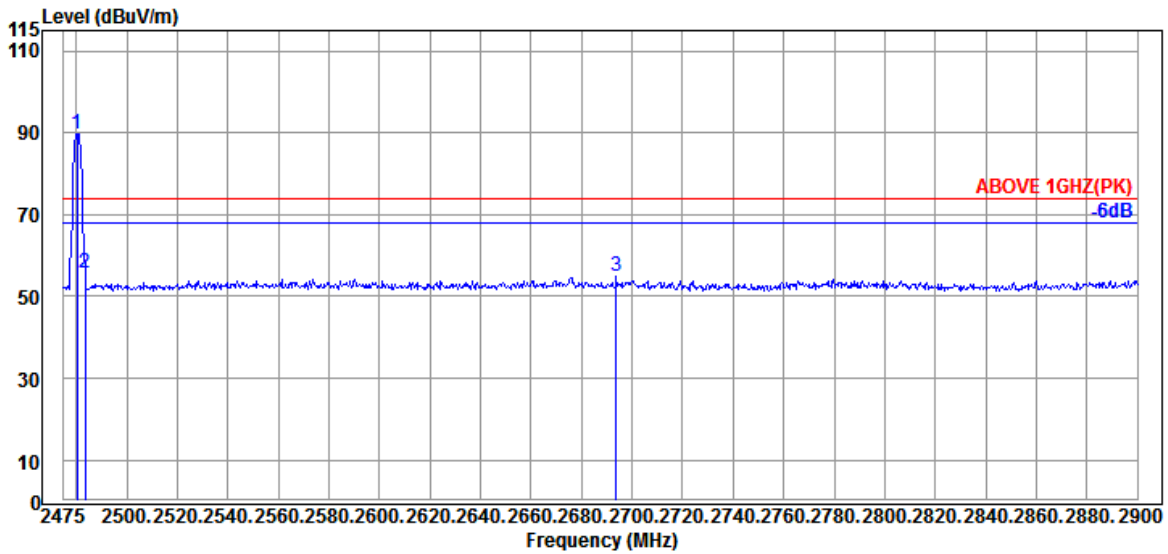

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.525	27.97	6.18	33.12	88.84	89.87	---	---	Peak
2483.500	28.01	6.18	33.11	54.53	55.61	74.00	18.39	Peak
2693.875	28.89	6.47	32.96	52.37	54.77	74.00	19.23	Peak

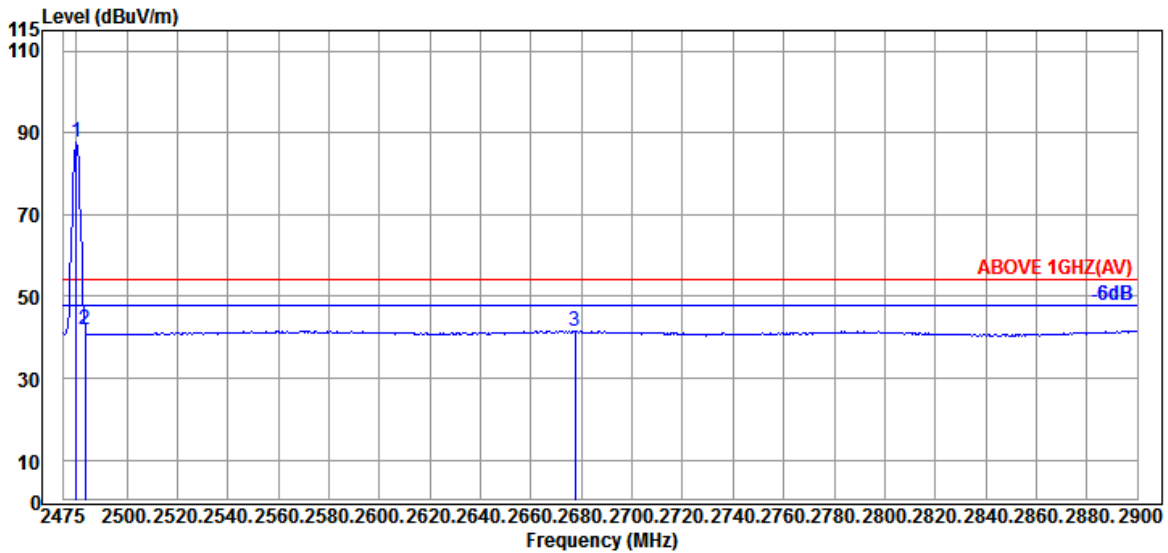


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.100	27.97	6.18	33.12	86.73	87.76	---	---	Average
2483.500	28.01	6.18	33.11	40.91	41.99	54.00	12.01	Average
2677.300	28.86	6.45	32.97	39.19	41.53	54.00	12.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

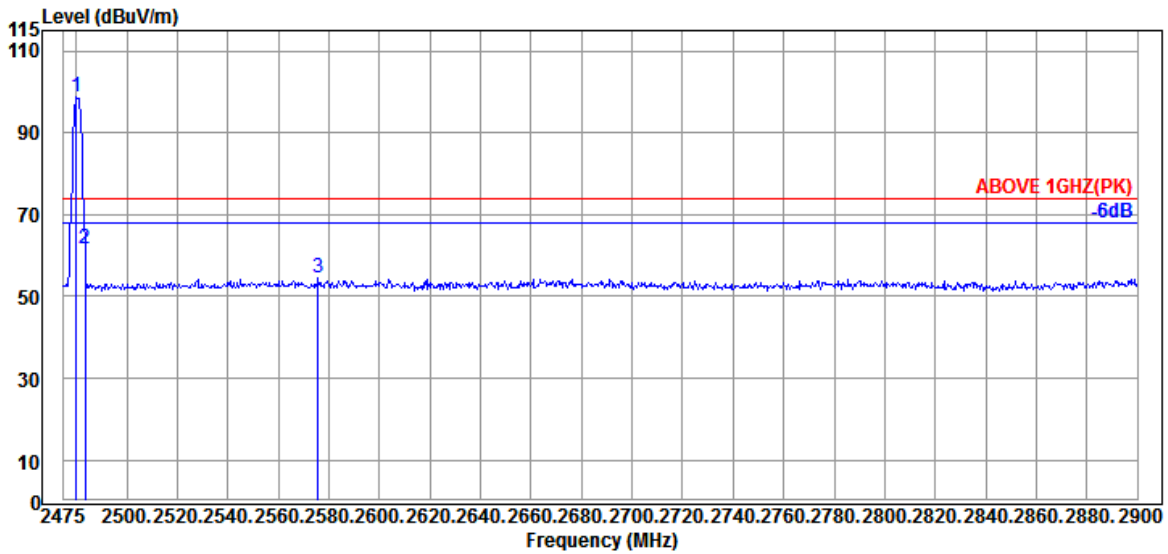

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.100	27.97	6.18	33.12	97.65	98.68	---	---	Peak
2483.500	28.01	6.18	33.11	60.64	61.72	74.00	12.28	Peak
2575.725	28.33	6.32	33.04	53.02	54.63	74.00	19.37	Peak

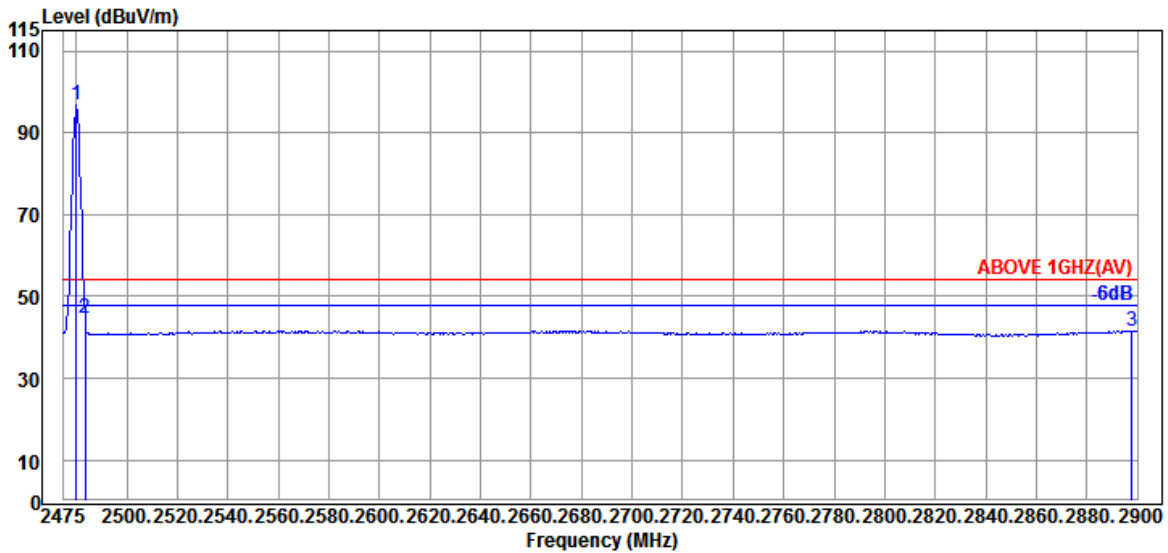

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.100	27.97	6.18	33.12	95.87	96.90	---	---	Average
2483.500	28.01	6.18	33.11	43.72	44.80	54.00	9.20	Average
2897.875	29.20	6.73	32.81	38.53	41.65	54.00	12.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	33.04	42.99	54.00	11.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	35.37	45.32	54.00	8.68	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	31.97	41.92	54.00	12.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	32.66	42.61	54.00	11.39	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	32.37	42.32	54.00	11.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	34.02	43.97	54.00	10.03	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	32.68	42.63	54.00	11.37	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	32.75	42.70	54.00	11.30	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	32.42	42.37	54.00	11.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	31.95	41.90	54.00	12.10	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	33.25	43.20	54.00	10.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	32.90	8.72	31.67	32.89	42.84	54.00	11.16	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.70	8.68	31.70	34.14	43.82	54.00	10.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.70	8.68	31.70	34.32	44.00	54.00	10.00	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	32.90	8.72	31.67	32.18	42.13	54.00	11.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	32.90	8.72	31.67	30.74	40.69	54.00	13.31	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.05	8.77	31.64	31.00	41.18	54.00	12.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.05	8.77	31.64	31.76	41.94	54.00	12.06	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.