


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	148
A.2.3 Emissions in Non-restricted Frequency Bands.....	163
A.3 26dB/6dB BANDWIDTH	164
A.3.1 26dB/6dB Bandwidth Result	164
A.3.2 Measurement Plots	169
A.4 MAXIMUM OUTPUT POWER	189
A.4.1 Average Output Power	189
A.4.2 Measurement Plots	194
A.5 POWER SPECTRAL DENSITY	202
A.5.1 Power Spectral Density Result	202
A.5.2 Measurement Plots	206
A.6 FREQUENCY STABILITY	225
A.6.1 Frequency stability Result	225

A.1 CONDUCTED EMISSION

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

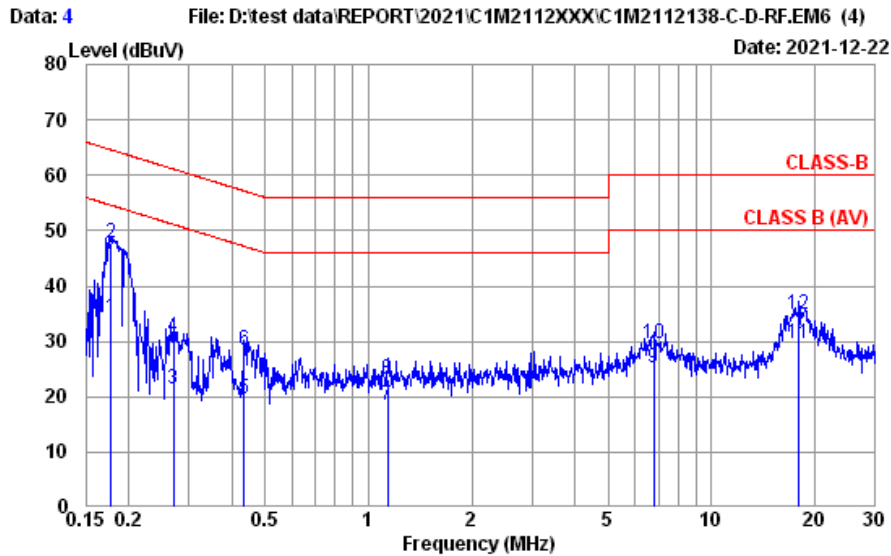


Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 16Z90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		
	INPAQ		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.178	10.40	0.03	9.85	13.97	34.25	54.59	20.34	Average
2	0.178	10.40	0.03	9.85	27.52	47.80	64.59	16.79	QP
3	0.270	10.38	0.03	9.85	1.09	21.35	51.12	29.77	Average
4	0.270	10.38	0.03	9.85	10.58	30.84	61.12	30.28	QP
5	0.433	10.37	0.03	9.85	-0.50	19.75	47.20	27.45	Average
6	0.433	10.37	0.03	9.85	8.23	28.48	57.20	28.72	QP
7	1.135	10.39	0.04	9.85	-1.68	18.60	46.00	27.40	Average
8	1.135	10.39	0.04	9.85	2.82	23.10	56.00	32.90	QP
9	6.769	10.58	0.11	9.87	4.53	25.09	50.00	24.91	Average
10	6.769	10.58	0.11	9.87	9.06	29.62	60.00	30.38	QP
11	17.944	11.04	0.18	9.93	8.31	29.46	50.00	20.54	Average
12	17.944	11.04	0.18	9.93	13.86	35.01	60.00	24.99	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

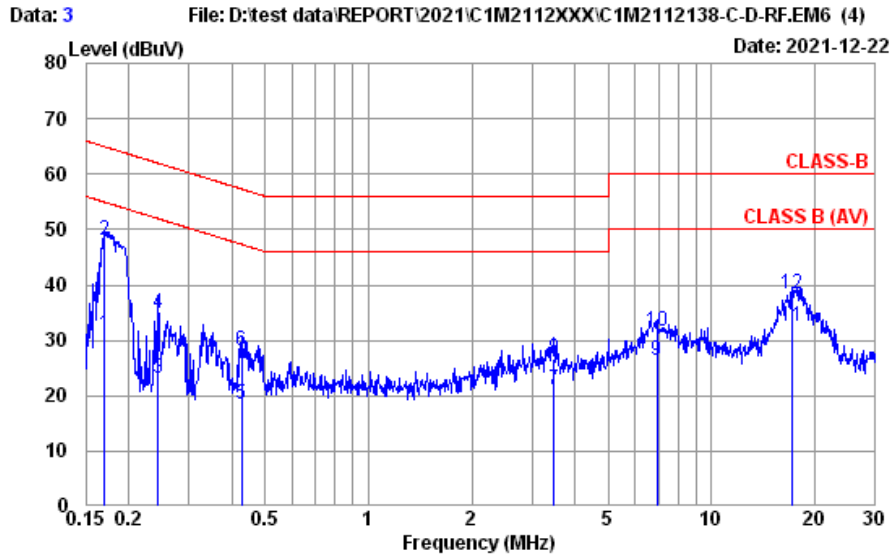


Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: I6Z90Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		
	INPAQ		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.170	10.40	0.03	9.85	10.78	31.06	54.94	23.88	Average
2	0.170	10.40	0.03	9.85	27.66	47.94	64.94	17.00	QP
3	0.244	10.38	0.03	9.85	2.80	23.06	51.95	28.89	Average
4	0.244	10.38	0.03	9.85	14.51	34.77	61.95	27.18	QP
5	0.426	10.37	0.03	9.85	-1.69	18.56	47.33	28.77	Average
6	0.426	10.37	0.03	9.85	7.79	28.04	57.33	29.29	QP
7	3.472	10.42	0.08	9.86	0.81	21.17	46.00	24.83	Average
8	3.472	10.42	0.08	9.86	6.20	26.56	56.00	29.44	QP
9	6.951	10.50	0.12	9.87	5.85	26.34	50.00	23.66	Average
10	6.951	10.50	0.12	9.87	11.26	31.75	60.00	28.25	QP
11	17.109	10.72	0.18	9.92	11.64	32.46	50.00	17.54	Average
12	17.109	10.72	0.18	9.92	17.53	38.35	60.00	21.65	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

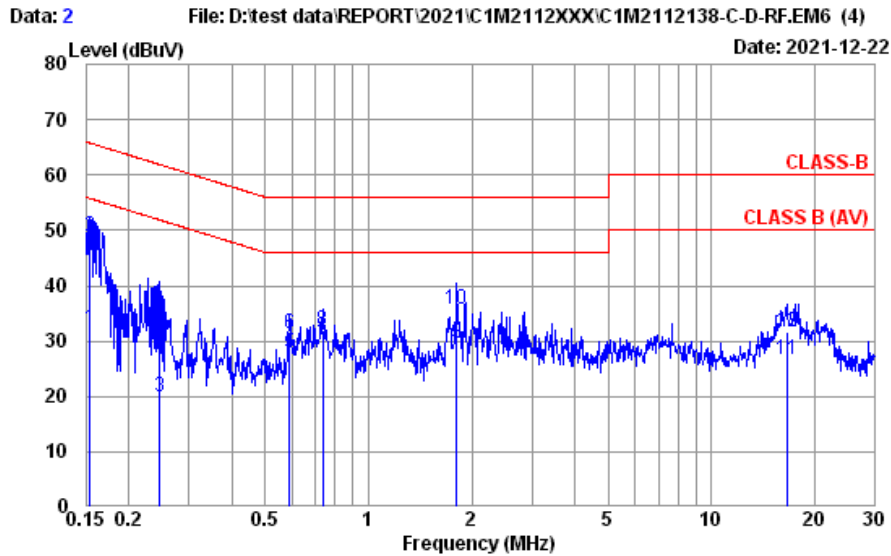


Site No. : No.8 Shielded Room Data No. : 2
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : NEUTRAL
 Environment : 22°C / 67% Engineer : Roy Hung
 EUT Model : 16Z90Q Test Rating : 120Vac/60Hz
 Test Mode : Operating
 Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.154	10.41	0.03	9.85	12.00	32.29	55.78	23.49	Average
2	0.154	10.41	0.03	9.85	28.65	48.94	65.78	16.84	QP
3	0.247	10.38	0.03	9.85	-0.34	19.92	51.86	31.94	Average
4	0.247	10.38	0.03	9.85	12.69	32.95	61.86	28.91	QP
5	0.589	10.37	0.03	9.85	7.67	27.92	46.00	18.08	Average
6	0.589	10.37	0.03	9.85	11.24	31.49	56.00	24.51	QP
7	0.735	10.38	0.04	9.85	8.97	29.24	46.00	16.76	Average
8	0.735	10.38	0.04	9.85	11.74	32.01	56.00	23.99	QP
9	1.810	10.41	0.06	9.86	9.33	29.66	46.00	16.34	Average
10	1.810	10.41	0.06	9.86	15.44	35.77	56.00	20.23	QP
11	16.573	10.99	0.18	9.92	5.45	26.54	50.00	23.46	Average
12	16.573	10.99	0.18	9.92	10.66	31.75	60.00	28.25	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2021/12/22	Temp./Hum.	22°C/67%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

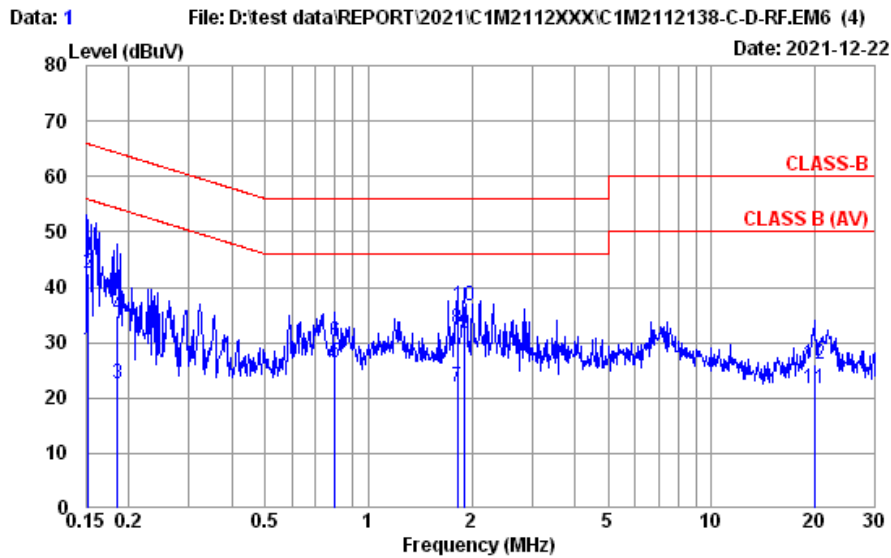

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: LINE
Environment	: 22°C / 67%	Engineer	: Roy Hung
EUT Model	: 162900	Test Rating	: 120Vac/60Hz
Test Mode	: Operating Luxshare		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.153	10.40	0.03	9.85	8.56	28.84	55.84	27.00	Average
2	0.153	10.40	0.03	9.85	22.09	42.37	65.84	23.47	QP
3	0.185	10.39	0.03	9.85	2.38	22.65	54.24	31.59	Average
4	0.185	10.39	0.03	9.85	14.49	34.76	64.24	29.48	QP
5	0.800	10.38	0.04	9.85	6.19	26.46	46.00	19.54	Average
6	0.800	10.38	0.04	9.85	9.77	30.04	56.00	25.96	QP
7	1.819	10.40	0.06	9.86	1.68	22.00	46.00	24.00	Average
8	1.819	10.40	0.06	9.86	12.16	32.48	56.00	23.52	QP
9	1.908	10.40	0.06	9.86	11.22	31.54	46.00	14.46	Average
10	1.908	10.40	0.06	9.86	16.34	36.66	56.00	19.34	QP
11	19.950	10.77	0.19	9.94	0.91	21.81	50.00	28.19	Average
12	19.950	10.77	0.19	9.94	5.28	26.18	60.00	33.82	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2021/12/21 ~ 2022/01/02	Temp./Hum.	20 ~ 23°C/59 ~ 69%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna) for UNII Band 2A/2C/III Test SKU #1 (with INPAQ Antenna) for UNII Band I Test		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	22.12	1.26	32.43	40.47	31.42	40.00	8.58	Peak
109.540	17.24	2.39	32.33	48.91	36.21	43.50	7.29	Peak
423.820	21.83	5.77	32.23	45.63	41.00	46.00	5.00	Peak
677.960	24.68	7.17	32.13	40.42	40.14	46.00	5.86	Peak
903.000	26.33	8.46	31.46	35.87	39.20	46.00	6.80	Peak
996.120	27.10	8.95	30.57	31.96	37.44	54.00	16.56	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.52	1.24	32.43	43.93	35.26	40.00	4.74	Peak
122.150	17.87	2.55	32.31	50.68	38.79	43.50	4.71	Peak
444.190	22.21	5.96	32.23	46.43	42.37	46.00	3.63	Peak
677.960	24.68	7.17	32.13	40.72	40.44	46.00	5.56	Peak
903.000	26.33	8.46	31.46	33.69	37.02	46.00	8.98	Peak
967.990	26.88	8.81	30.89	32.12	36.92	54.00	17.08	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

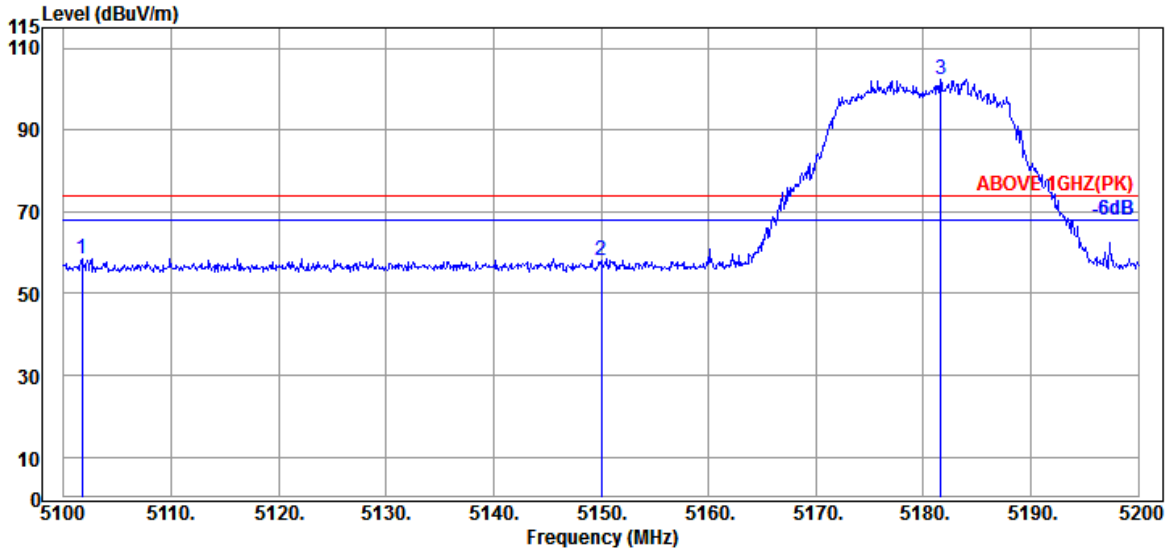

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.700	33.00	8.88	31.63	48.39	58.64	74.00	15.36	Peak
5150.000	33.10	8.92	31.63	47.77	58.16	74.00	15.84	Peak
@ 5181.600	33.17	8.95	31.63	91.99	102.48	---	---	Peak

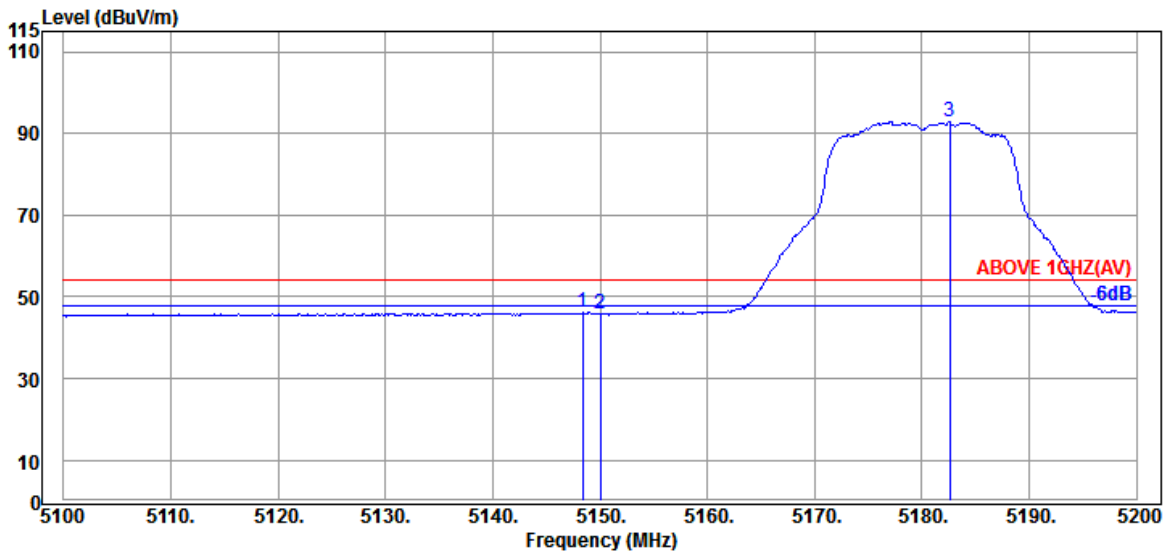


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.10	8.92	31.63	35.76	46.15	54.00	7.85	Average
5150.000	33.10	8.92	31.63	35.37	45.76	54.00	8.24	Average
@ 5182.600	33.17	8.95	31.63	82.33	92.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

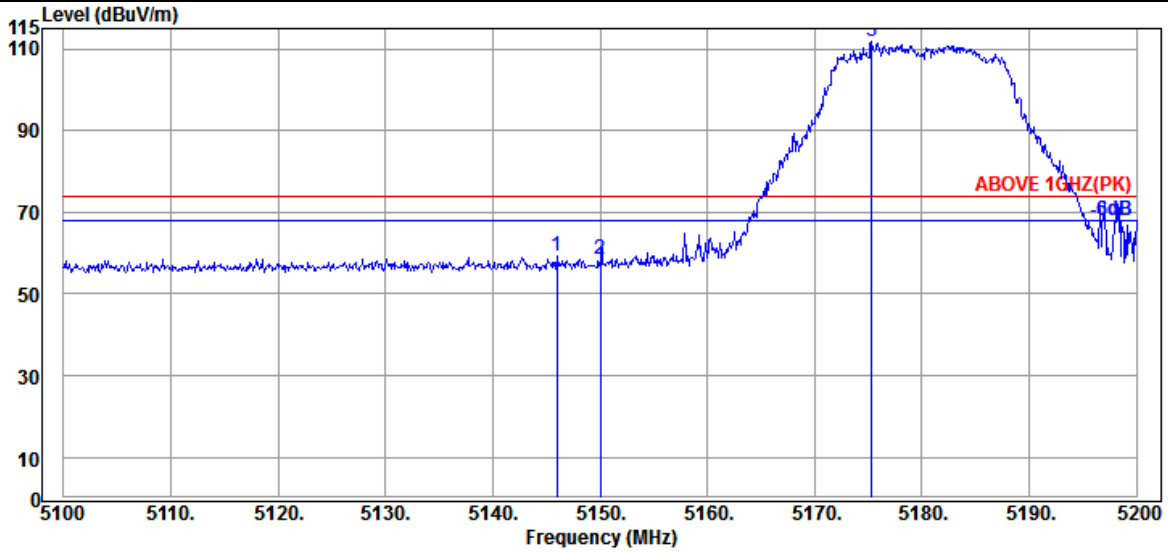

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.10	8.92	31.63	48.89	59.28	74.00	14.72	Peak
5150.000	33.10	8.92	31.63	48.08	58.47	74.00	15.53	Peak
@ 5175.300	33.17	8.95	31.63	101.19	111.68	---	---	Peak

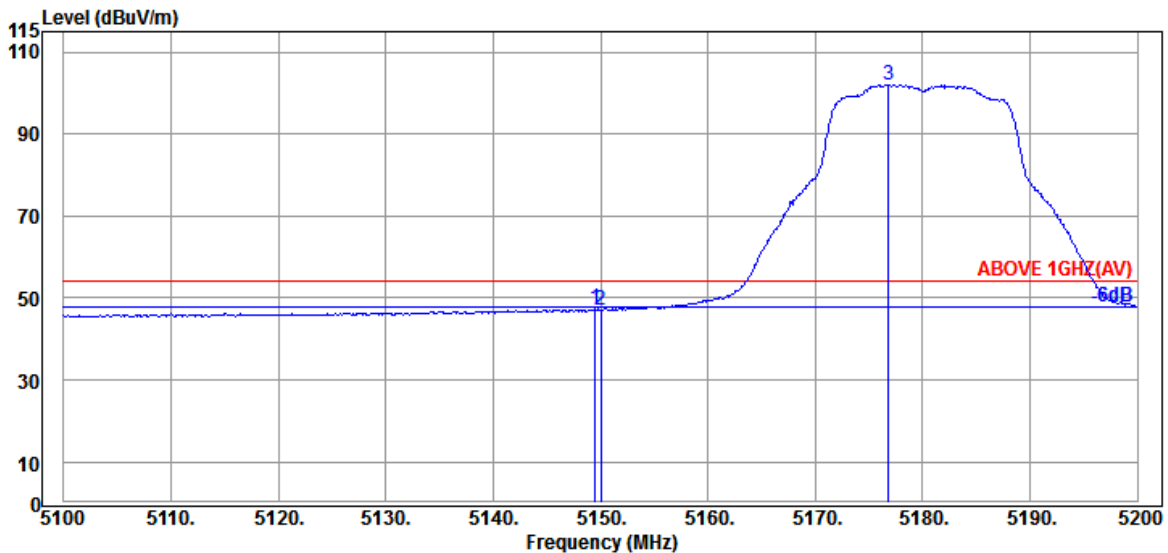


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.10	8.92	31.63	37.01	47.40	54.00	6.60	Average
5150.000	33.10	8.92	31.63	36.54	46.93	54.00	7.07	Average
@ 5176.800	33.17	8.95	31.63	91.61	102.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

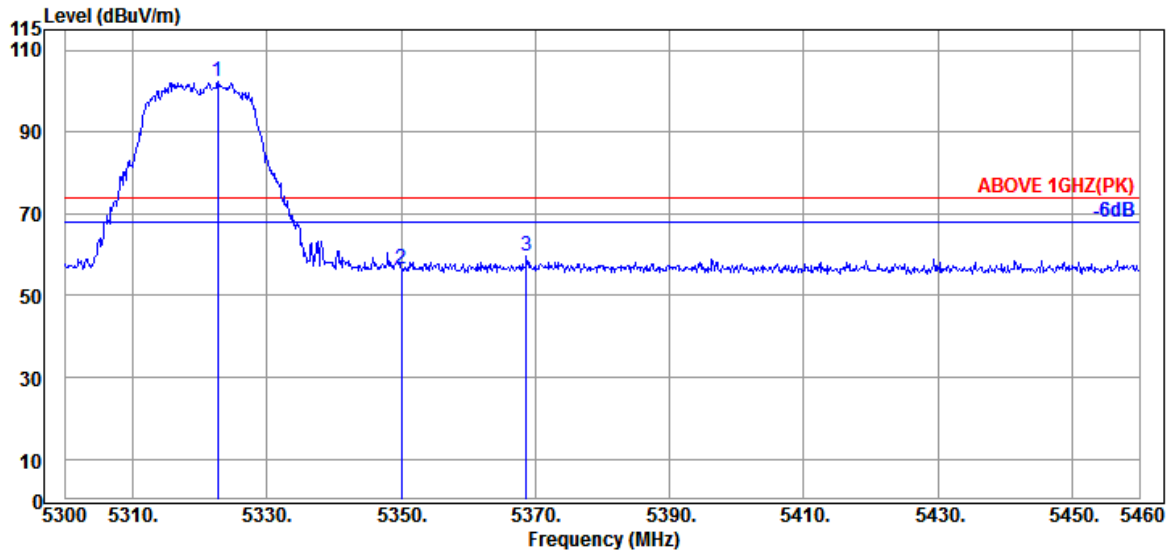

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	33.30	9.07	31.63	91.56	102.30	---	---	Peak
5350.080	33.50	9.10	31.63	45.69	56.66	74.00	17.34	Peak
5368.640	33.57	9.11	31.63	48.70	59.75	74.00	14.25	Peak

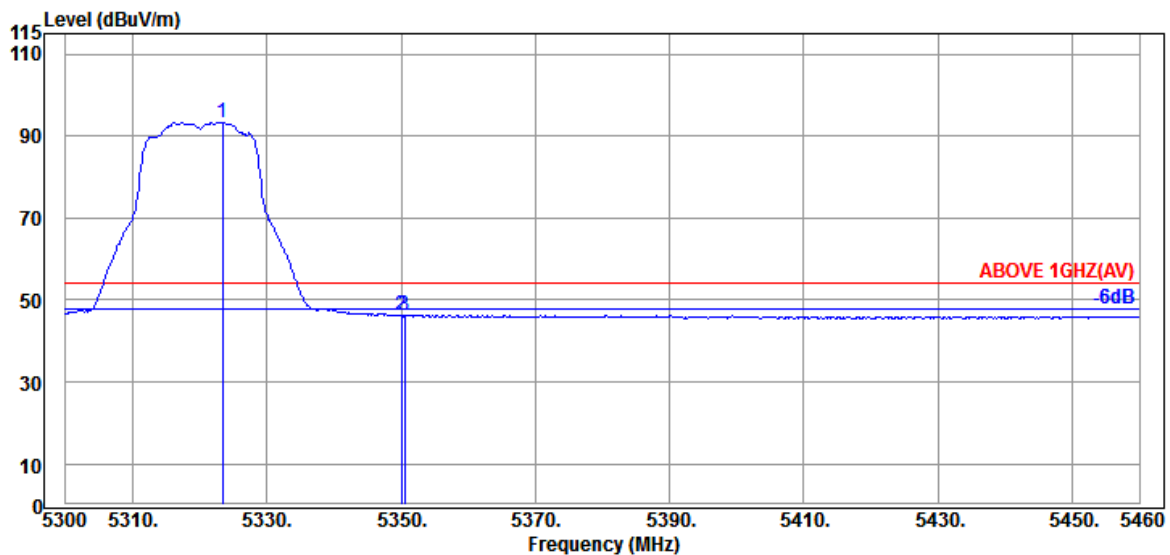


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	33.40	9.07	31.63	82.52	93.36	---	---	Average
5350.080	33.50	9.10	31.63	35.18	46.15	54.00	7.85	Average
5350.560	33.50	9.10	31.63	35.31	46.28	54.00	7.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

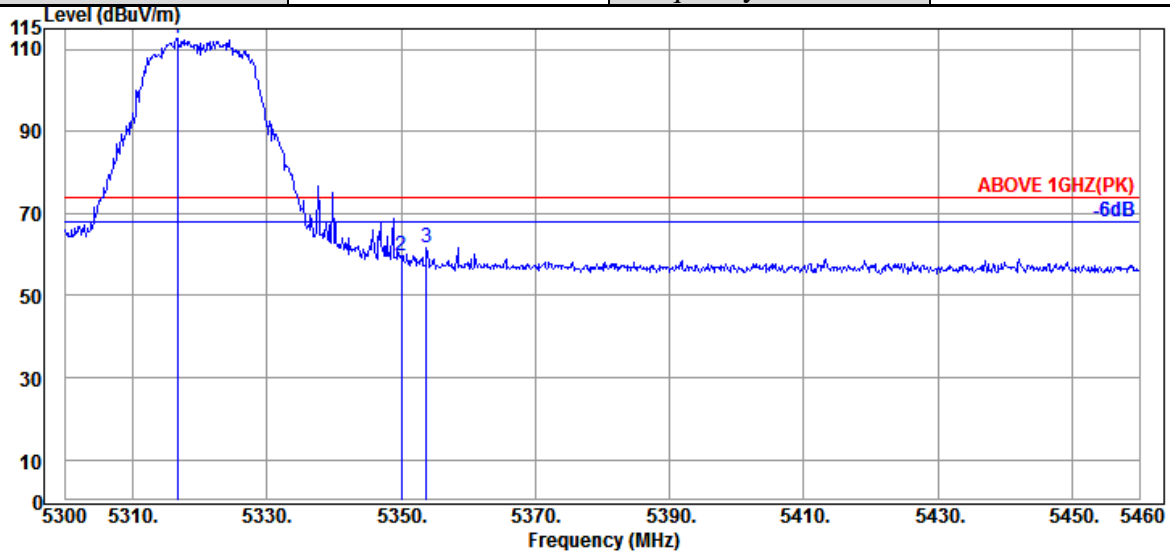

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.640	33.30	9.07	31.63	101.73	112.47	---	---	Peak
5350.080	33.50	9.10	31.63	48.83	59.80	74.00	14.20	Peak
5353.760	33.50	9.10	31.63	50.87	61.84	74.00	12.16	Peak

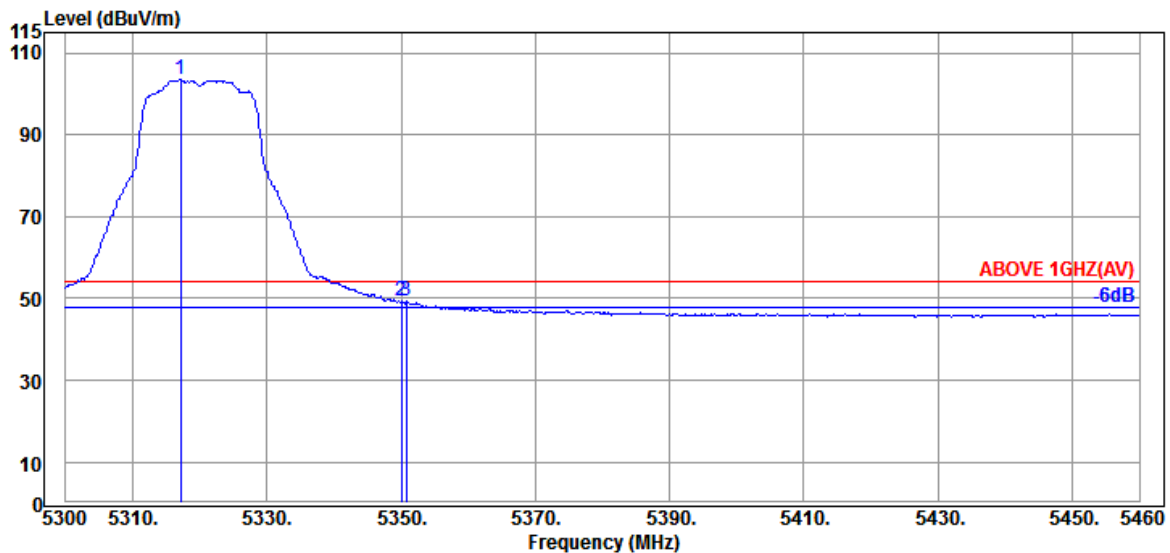


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	33.30	9.07	31.63	92.68	103.42	---	---	Average
5350.080	33.50	9.10	31.63	38.33	49.30	54.00	4.70	Average
5350.720	33.50	9.10	31.63	38.42	49.39	54.00	4.61	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

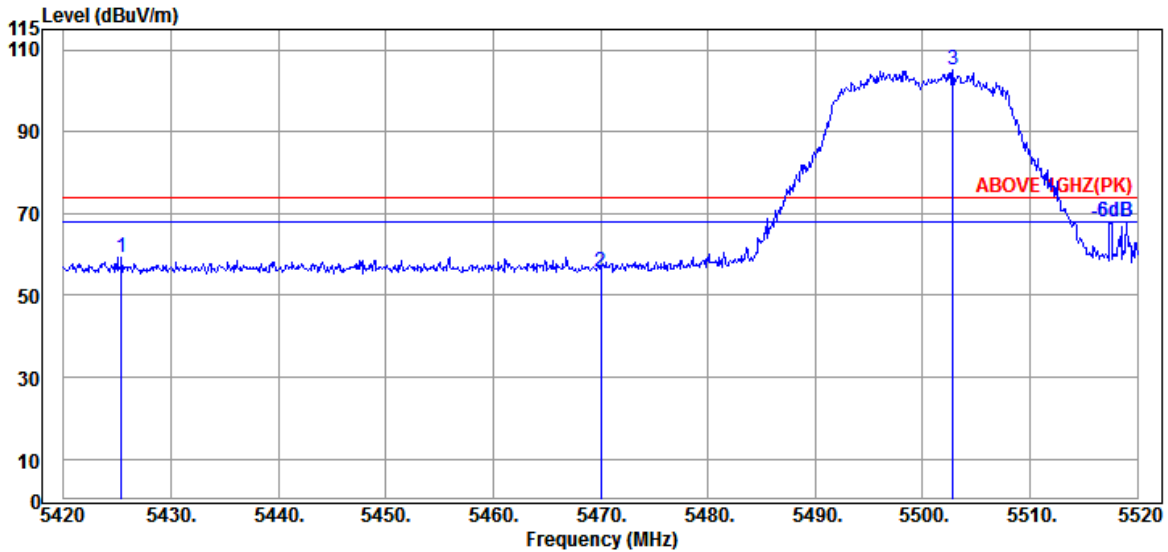

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.400	33.80	9.15	31.63	48.05	59.37	74.00	14.63	Peak
5470.000	33.97	9.20	31.63	44.19	55.73	74.00	18.27	Peak
@ 5502.800	34.10	9.23	31.63	93.34	105.04	---	---	Peak

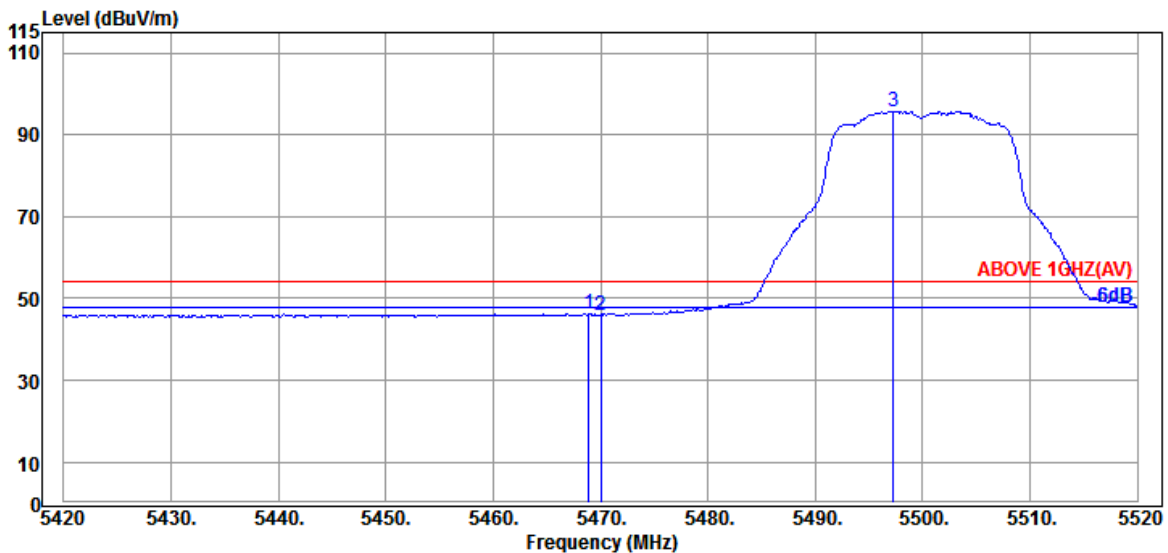


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	34.64	46.18	54.00	7.82	Average
5470.000	33.97	9.20	31.63	34.50	46.04	54.00	7.96	Average
@ 5497.300	34.10	9.23	31.63	84.02	95.72	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

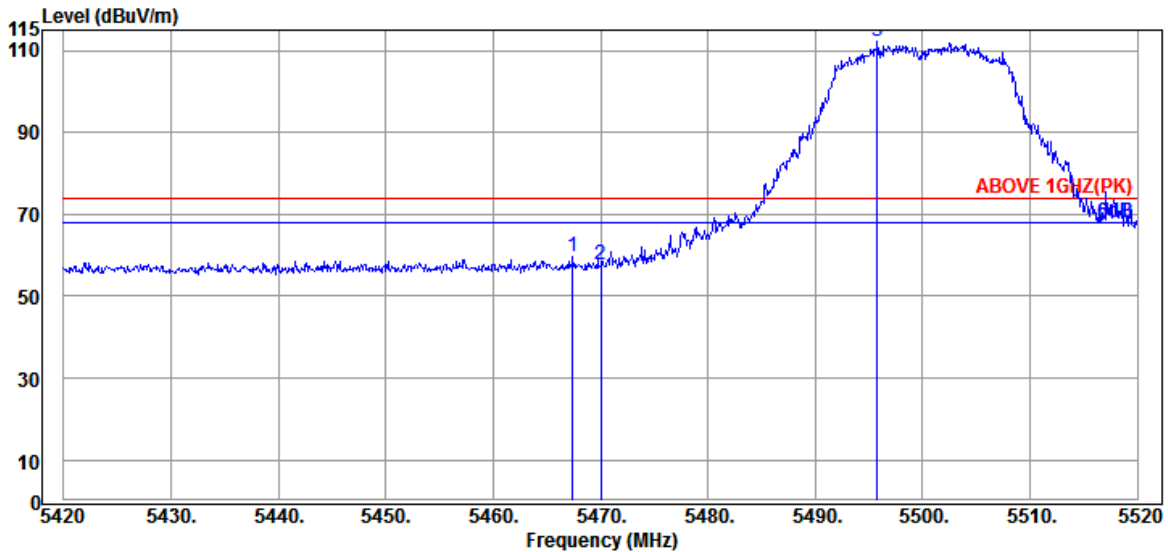

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	33.97	9.20	31.63	48.11	59.65	74.00	14.35	Peak
5470.000	33.97	9.20	31.63	46.17	57.71	74.00	16.29	Peak
@ 5495.800	34.10	9.21	31.63	100.36	112.04	---	---	Peak

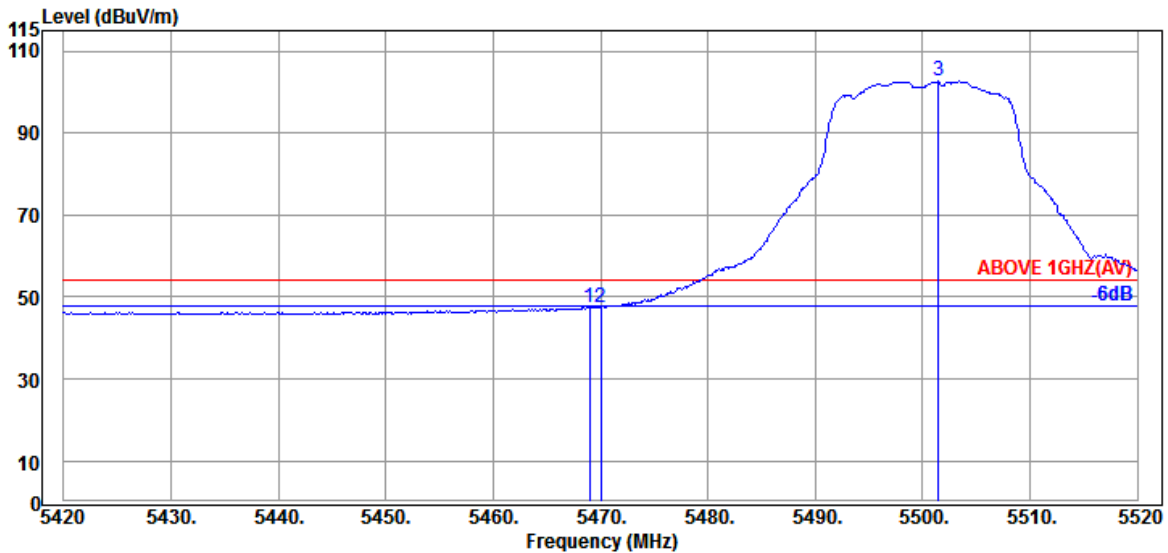


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	33.97	9.20	31.63	36.03	47.57	54.00	6.43	Average
5470.000	33.97	9.20	31.63	35.90	47.44	54.00	6.56	Average
@ 5501.500	34.10	9.23	31.63	90.89	102.59	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

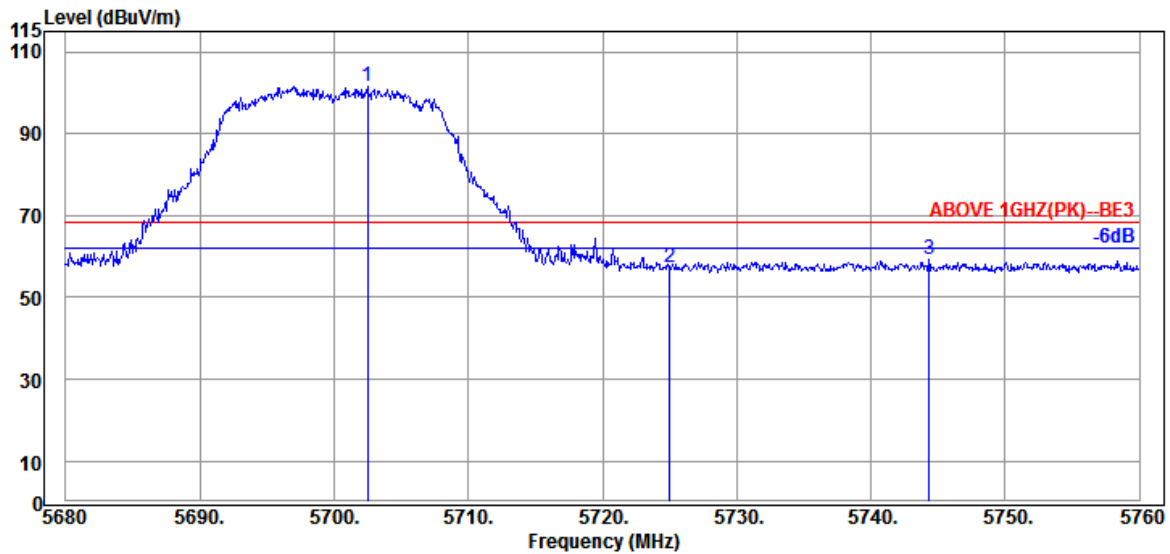

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.480	34.30	9.40	31.73	89.51	101.48	---	---	Peak
5725.040	34.50	9.42	31.74	45.27	57.45	68.20	10.75	Peak
5744.320	34.60	9.43	31.75	46.83	59.11	68.20	9.09	Peak

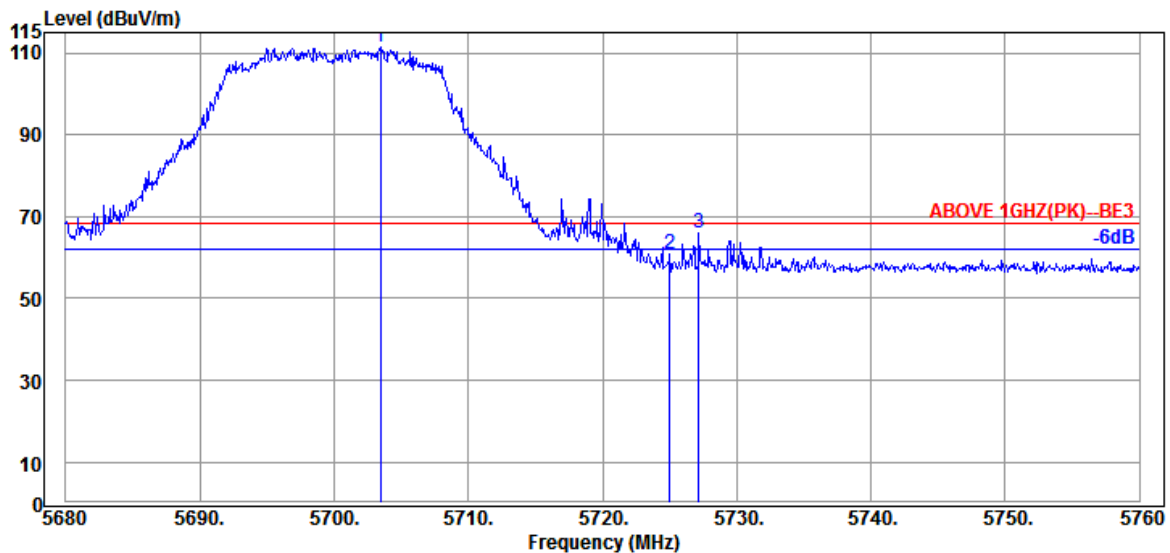


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.440	34.30	9.40	31.73	99.60	111.57	---	---	Peak
5725.040	34.50	9.42	31.74	48.73	60.91	68.20	7.29	Peak
5727.200	34.50	9.42	31.75	53.71	65.88	68.20	2.32	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

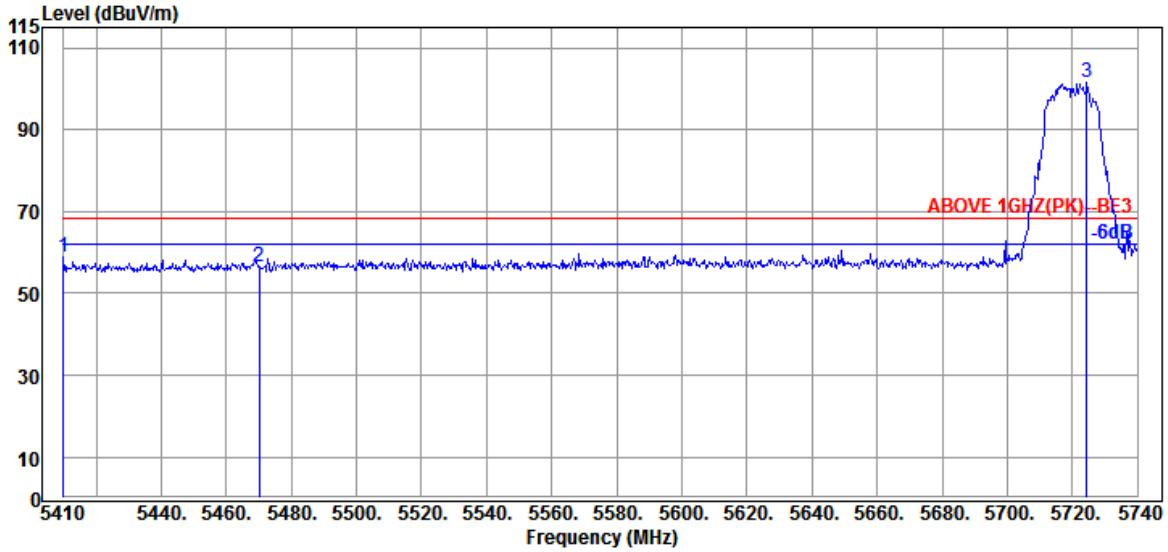

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5410.000	33.75	9.14	31.63	47.54	58.80	68.20	9.40	Peak
5470.060	33.97	9.20	31.63	45.01	56.55	68.20	11.65	Peak
@ 5724.490	34.50	9.42	31.74	89.30	101.48	---	---	Peak

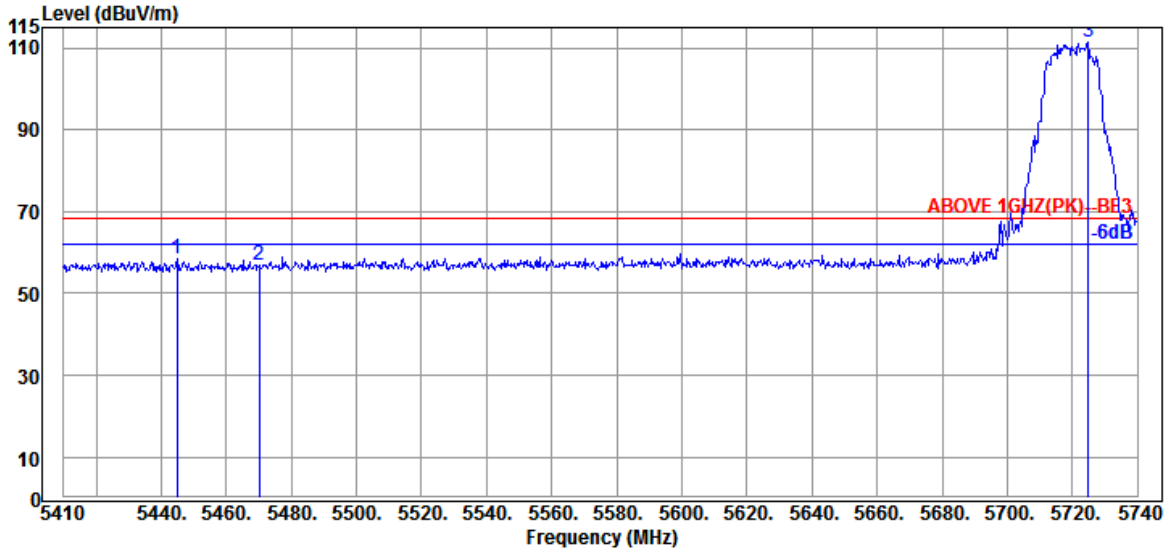


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.980	33.85	9.17	31.63	46.97	58.36	68.20	9.84	Peak
5470.060	33.97	9.20	31.63	45.17	56.71	68.20	11.49	Peak
@ 5724.820	34.50	9.42	31.74	99.07	111.25	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

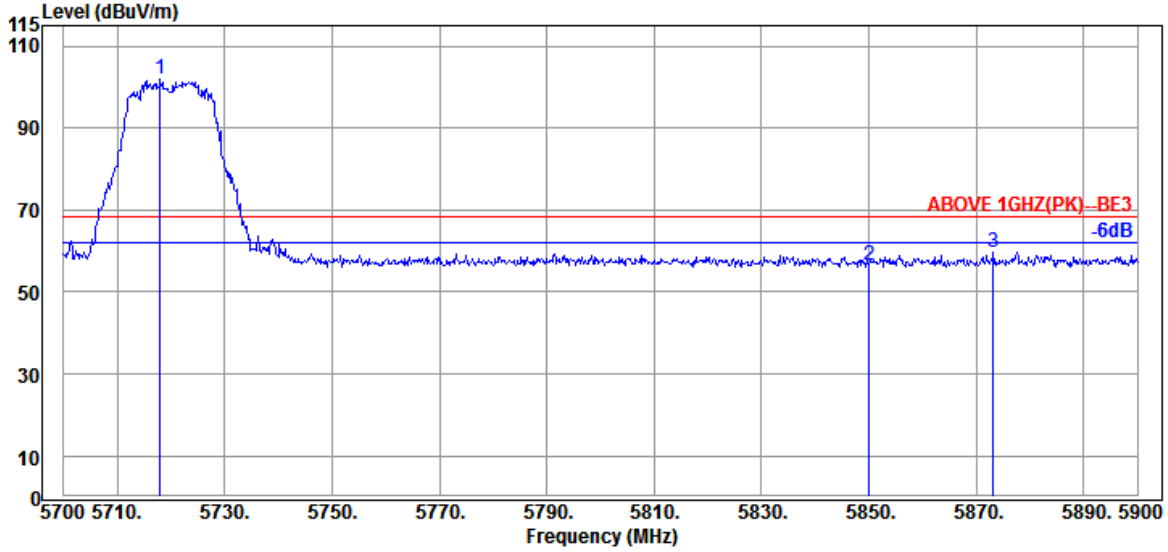

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.000	34.40	9.42	31.74	89.74	101.82	---	---	Peak
5850.000	35.00	9.52	31.80	43.93	56.65	68.20	11.55	Peak
5873.200	35.07	9.55	31.81	47.05	59.86	68.20	8.34	Peak

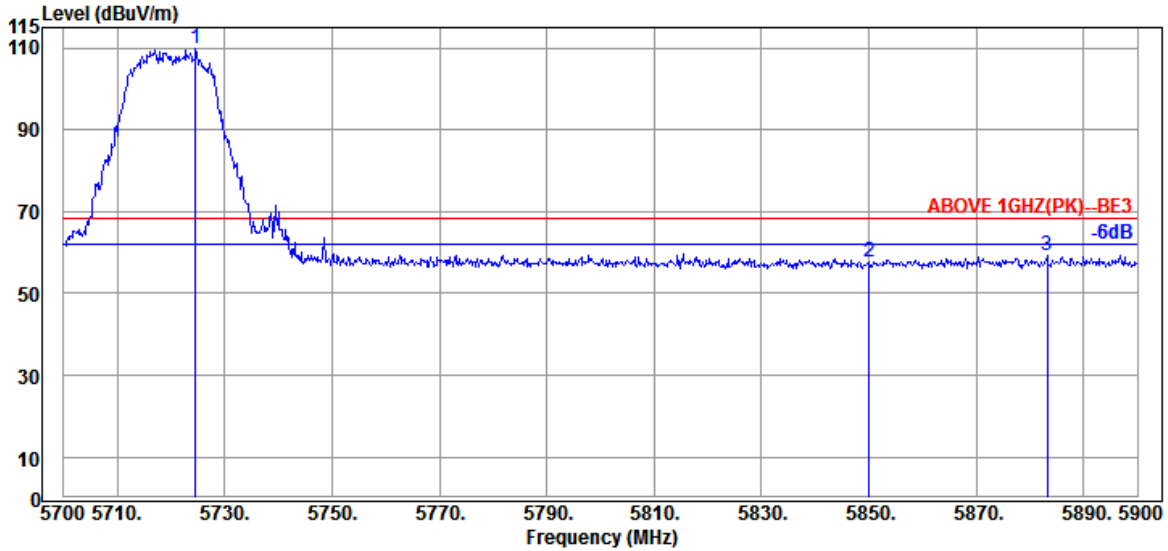


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.600	34.50	9.42	31.74	97.64	109.82	---	---	Peak
5850.000	35.00	9.52	31.80	44.96	57.68	68.20	10.52	Peak
5883.200	35.07	9.55	31.82	46.55	59.35	68.20	8.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

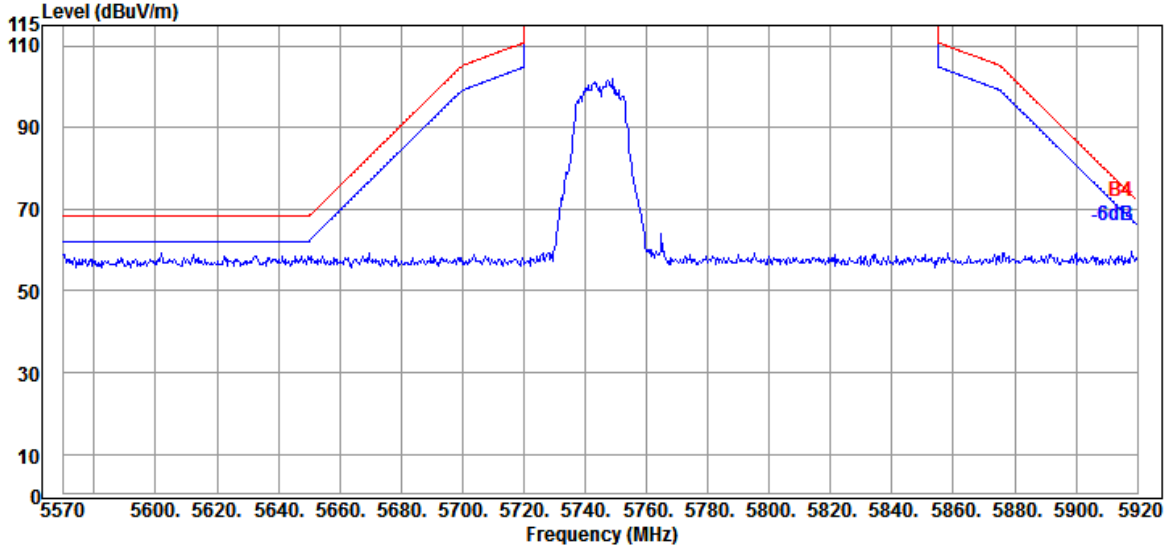


Antenna at Vertical Polarization

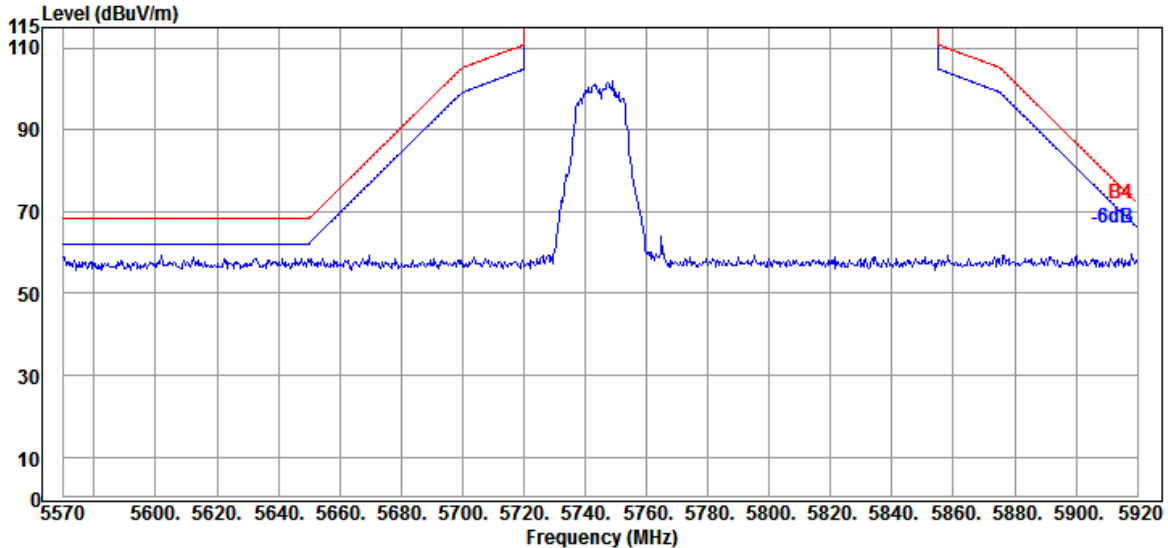


Mode	802.11a	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

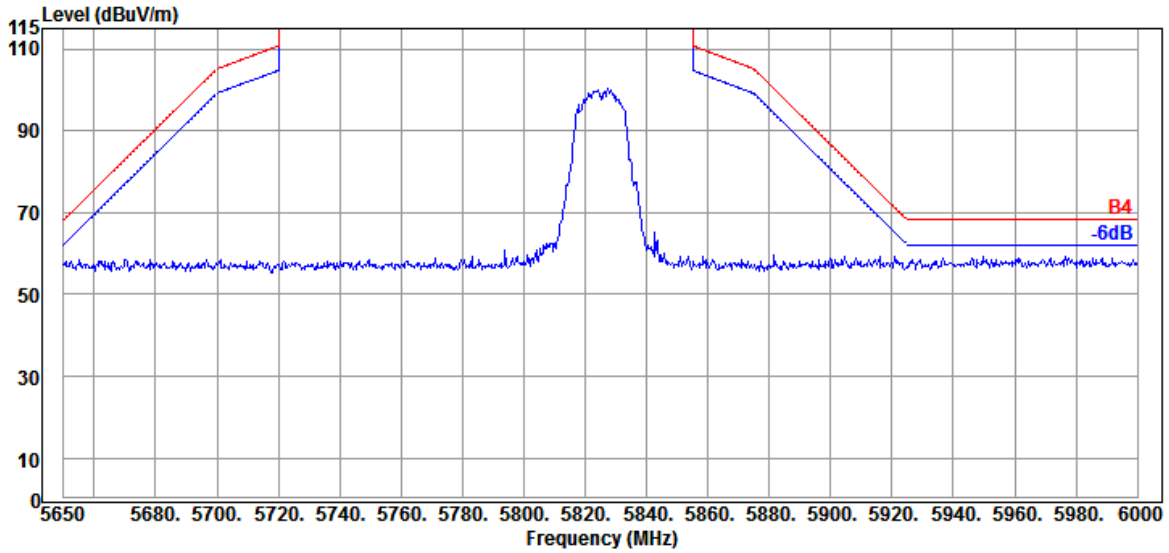

Antenna at Vertical Polarization

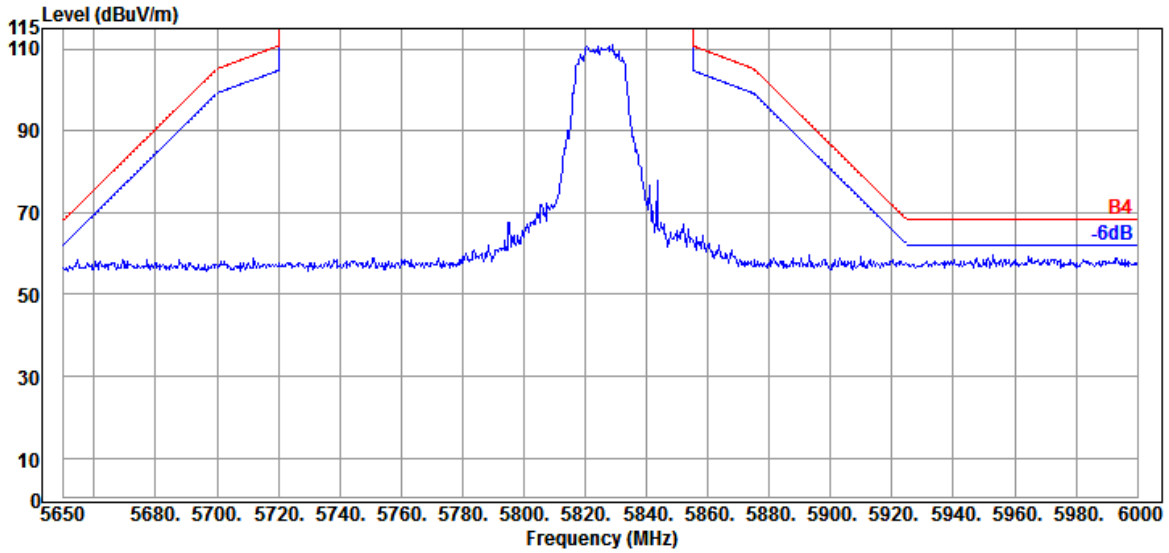


Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

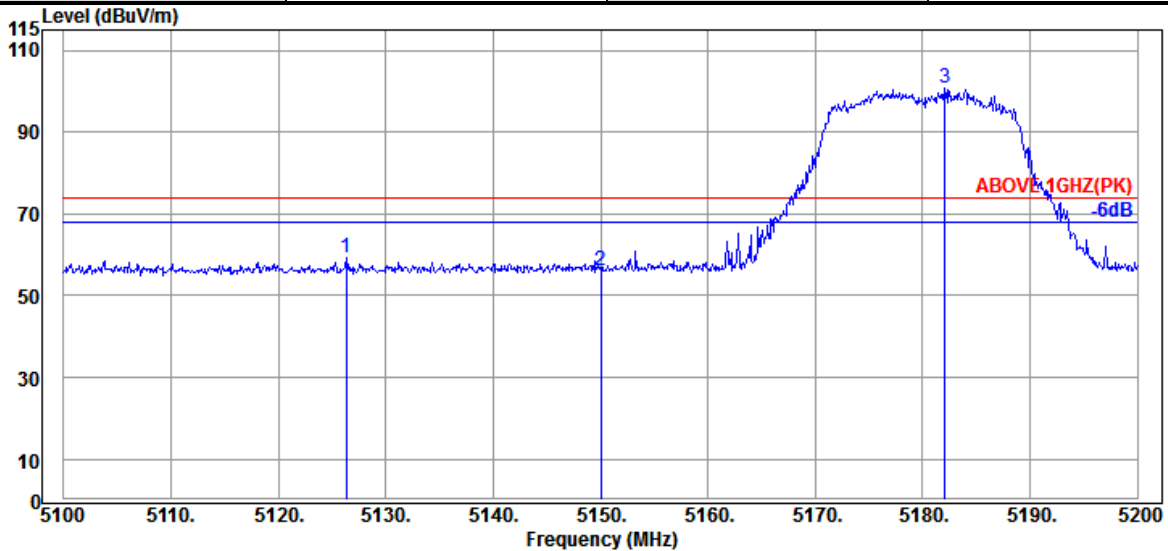

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.300	33.03	8.91	31.63	48.81	59.12	74.00	14.88	Peak
5150.000	33.10	8.92	31.63	45.74	56.13	74.00	17.87	Peak
@ 5182.100	33.17	8.95	31.63	90.44	100.93	---	---	Peak

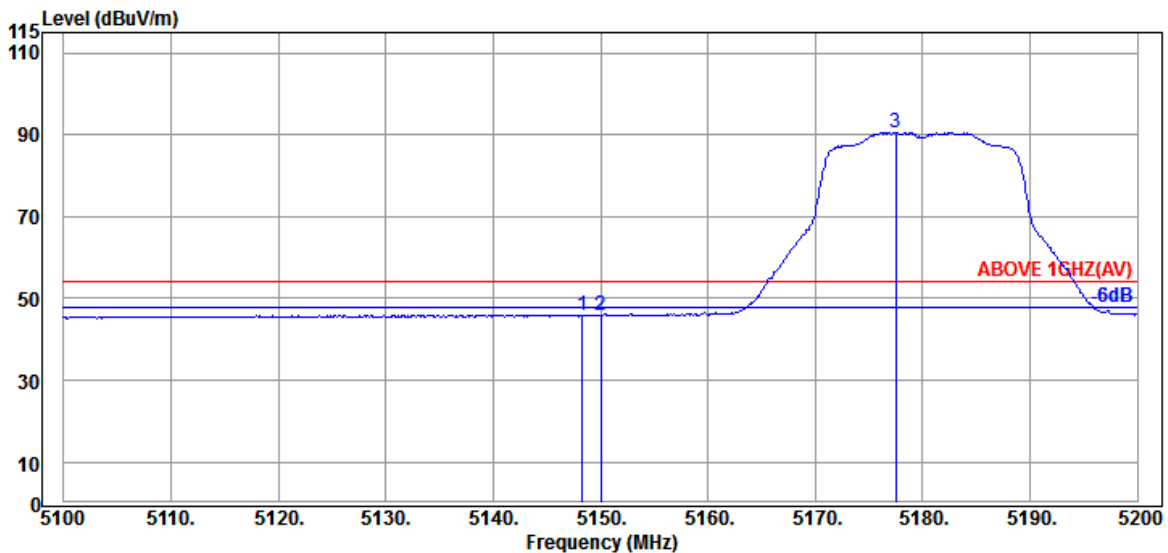


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.10	8.92	31.63	35.62	46.01	54.00	7.99	Average
5150.000	33.10	8.92	31.63	35.61	46.00	54.00	8.00	Average
@ 5177.500	33.17	8.95	31.63	80.18	90.67	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

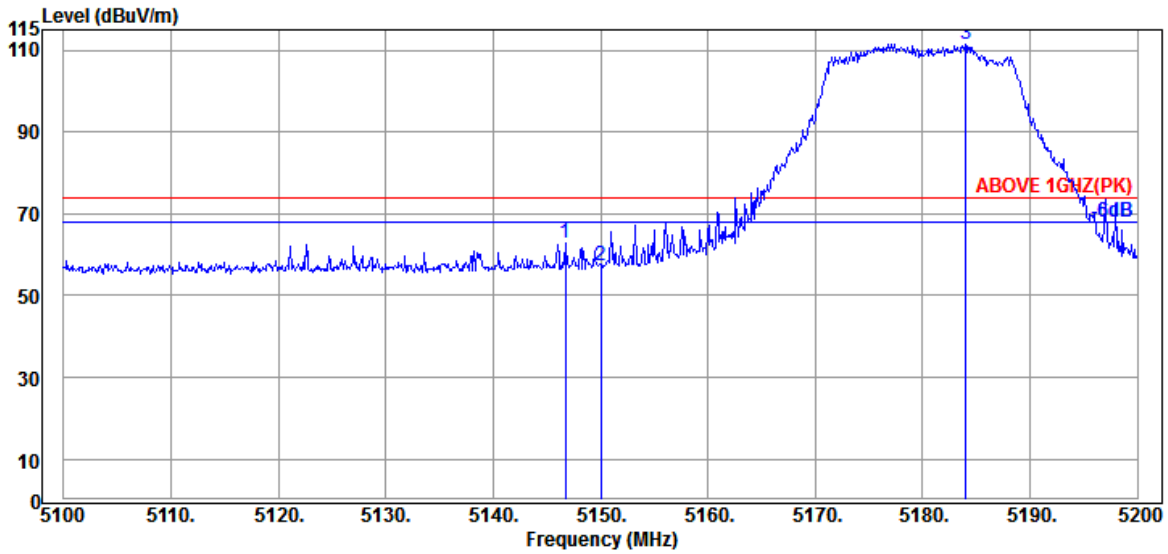

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.700	33.10	8.92	31.63	52.40	62.79	74.00	11.21	Peak
5150.000	33.10	8.92	31.63	46.72	57.11	74.00	16.89	Peak
@ 5184.000	33.17	8.95	31.63	101.13	111.62	---	---	Peak

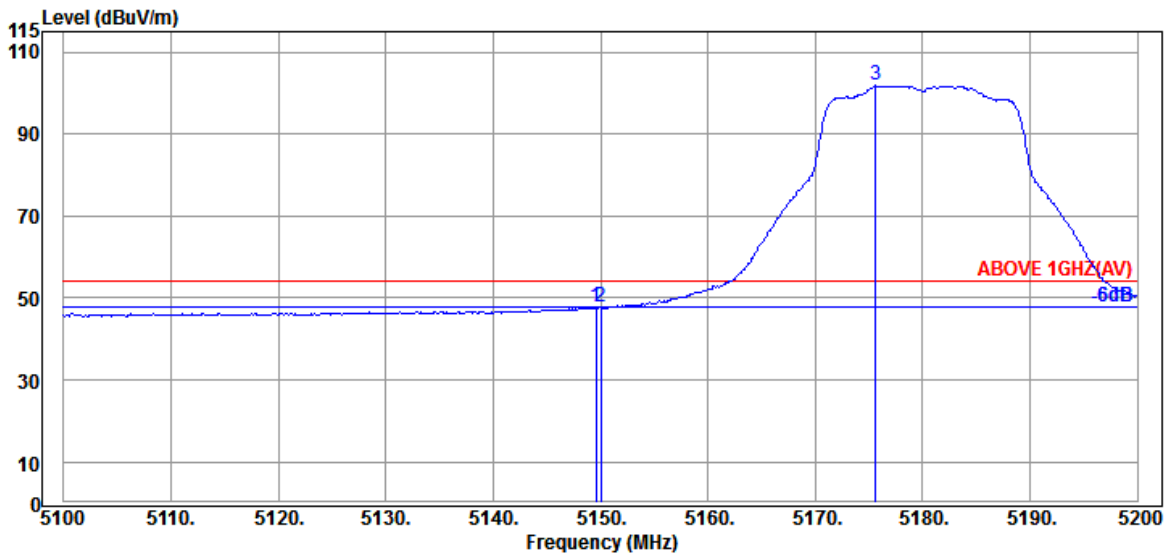


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.10	8.92	31.63	37.23	47.62	54.00	6.38	Average
5150.000	33.10	8.92	31.63	37.32	47.71	54.00	6.29	Average
@ 5175.600	33.17	8.95	31.63	91.36	101.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

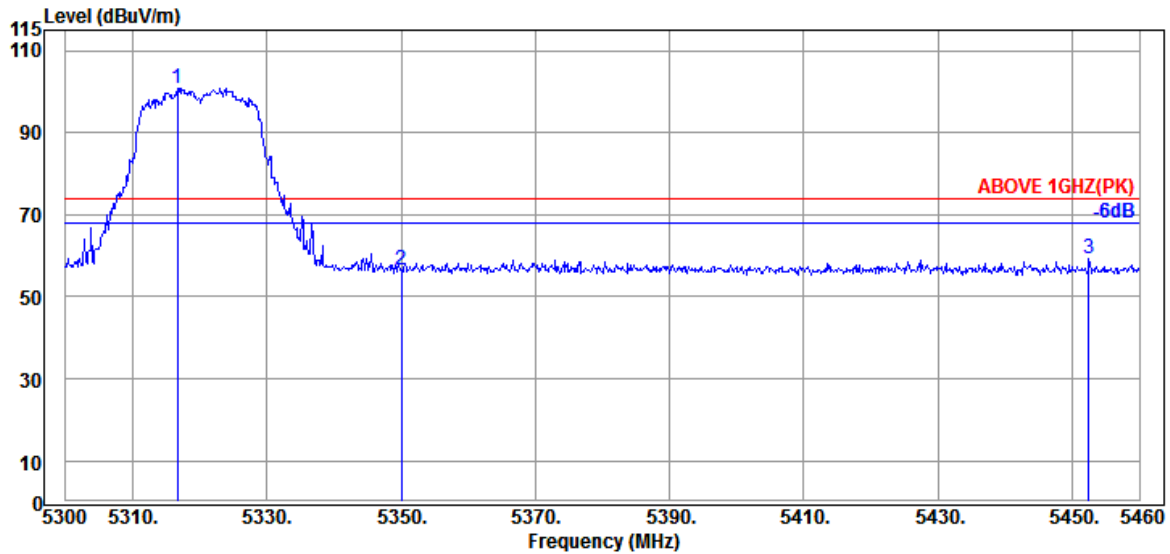

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.640	33.30	9.07	31.63	90.16	100.90	---	---	Peak
5350.080	33.50	9.10	31.63	45.62	56.59	74.00	17.41	Peak
5452.480	33.90	9.18	31.63	48.01	59.46	74.00	14.54	Peak

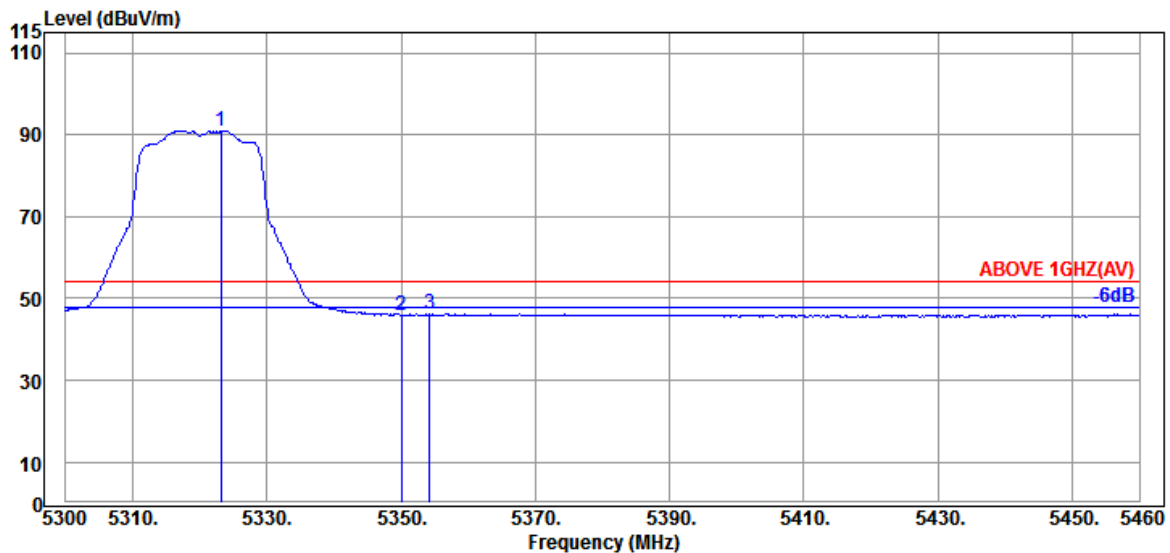


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	33.30	9.07	31.63	80.20	90.94	---	---	Average
5350.080	33.50	9.10	31.63	34.97	45.94	54.00	8.06	Average
5354.240	33.57	9.10	31.63	35.14	46.18	54.00	7.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

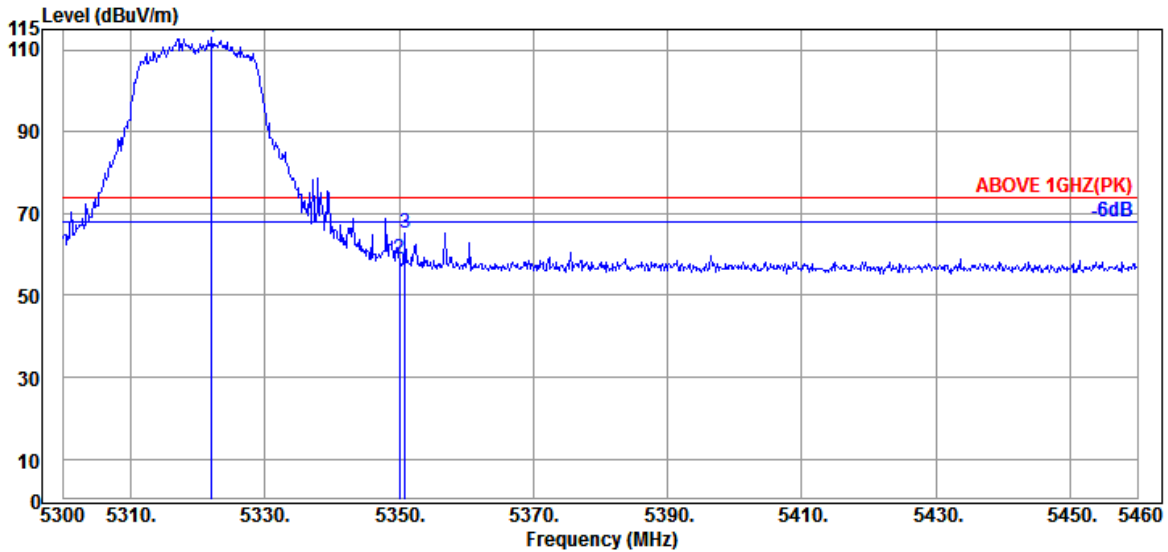

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.080	33.30	9.07	31.63	102.25	112.99	---	---	Peak
5350.080	33.50	9.10	31.63	47.93	58.90	74.00	15.10	Peak
5350.880	33.50	9.10	31.63	54.31	65.28	74.00	8.72	Peak

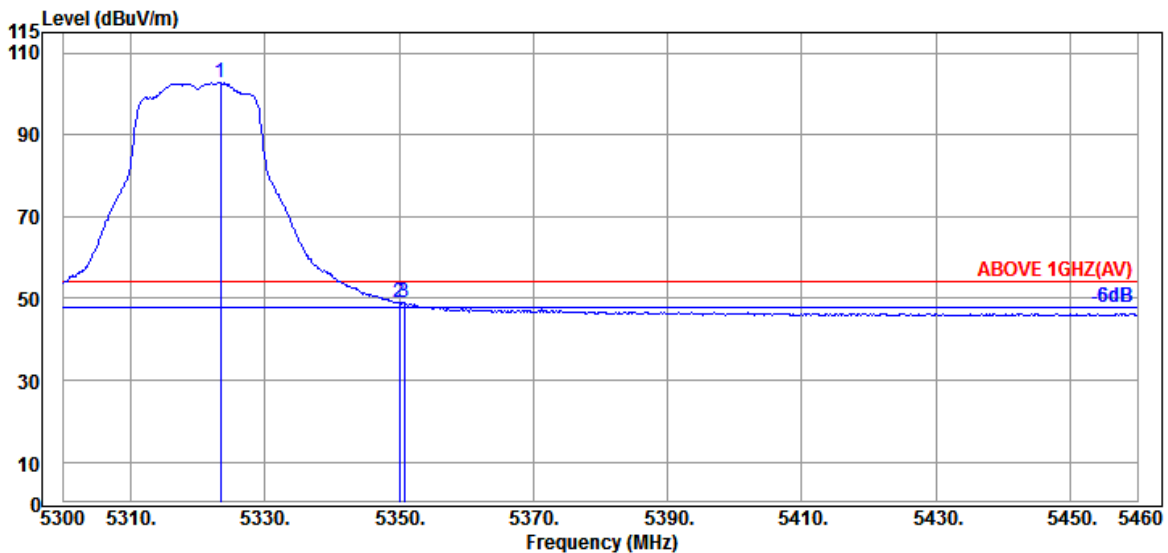


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.360	33.40	9.07	31.63	91.92	102.76	---	---	Average
5350.080	33.50	9.10	31.63	38.02	48.99	54.00	5.01	Average
5350.720	33.50	9.10	31.63	38.09	49.06	54.00	4.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

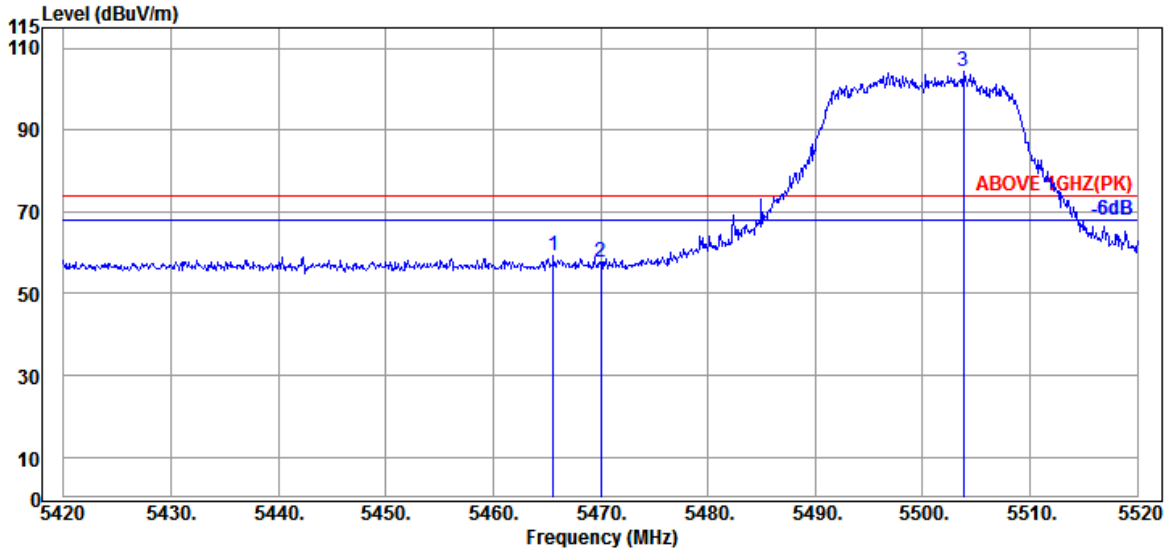

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	33.97	9.20	31.63	47.91	59.45	74.00	14.55	Peak
5470.000	33.97	9.20	31.63	46.11	57.65	74.00	16.35	Peak
@ 5503.800	34.10	9.23	31.63	92.64	104.34	---	---	Peak

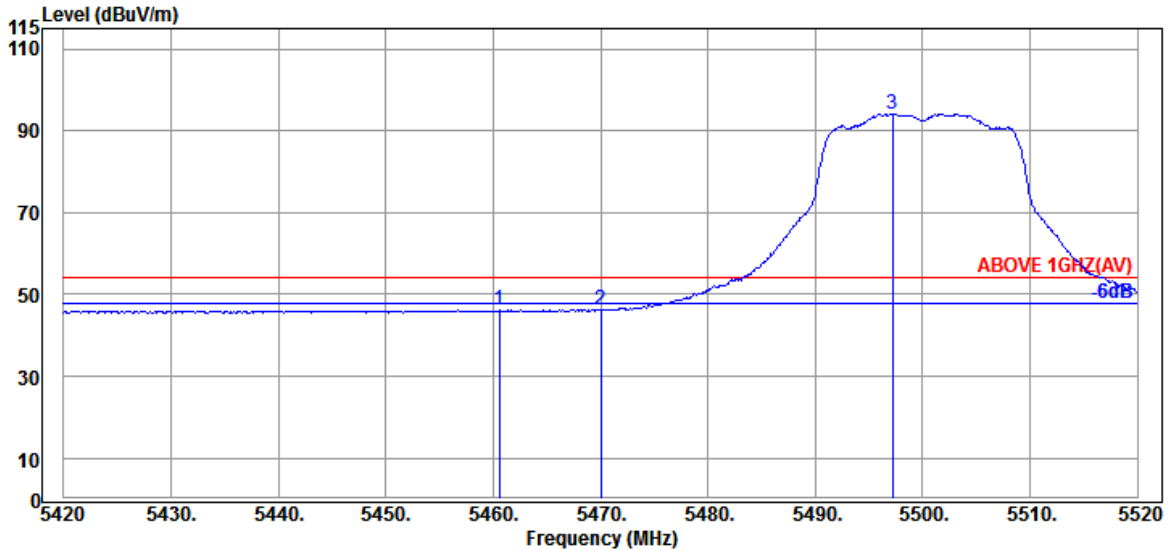


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.600	33.90	9.18	31.63	34.74	46.19	54.00	7.81	Average
5470.000	33.97	9.20	31.63	34.62	46.16	54.00	7.84	Average
@ 5497.200	34.10	9.23	31.63	82.48	94.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

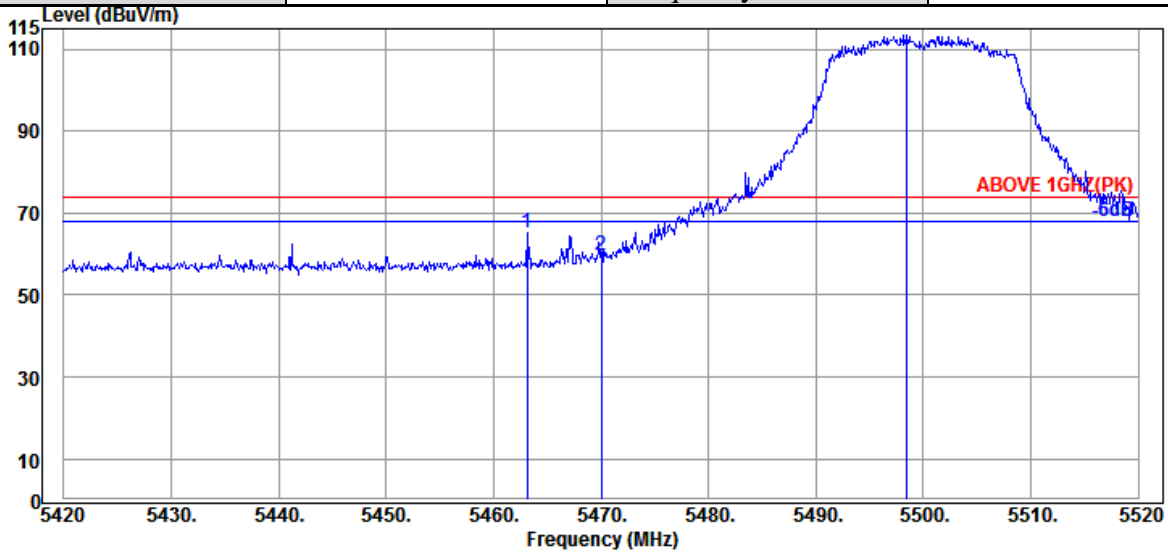

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	33.90	9.20	31.63	53.82	65.29	74.00	8.71	Peak
5470.000	33.97	9.20	31.63	48.18	59.72	74.00	14.28	Peak
@ 5498.400	34.10	9.23	31.63	101.72	113.42	---	---	Peak

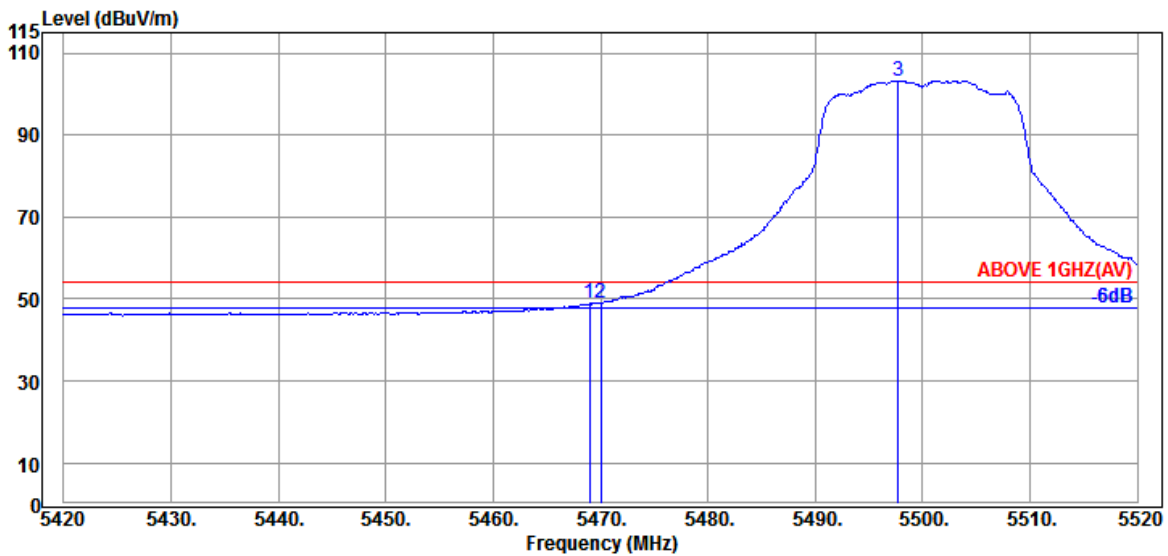


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	33.97	9.20	31.63	37.30	48.84	54.00	5.16	Average
5470.000	33.97	9.20	31.63	37.52	49.06	54.00	4.94	Average
@ 5497.700	34.10	9.23	31.63	91.60	103.30	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

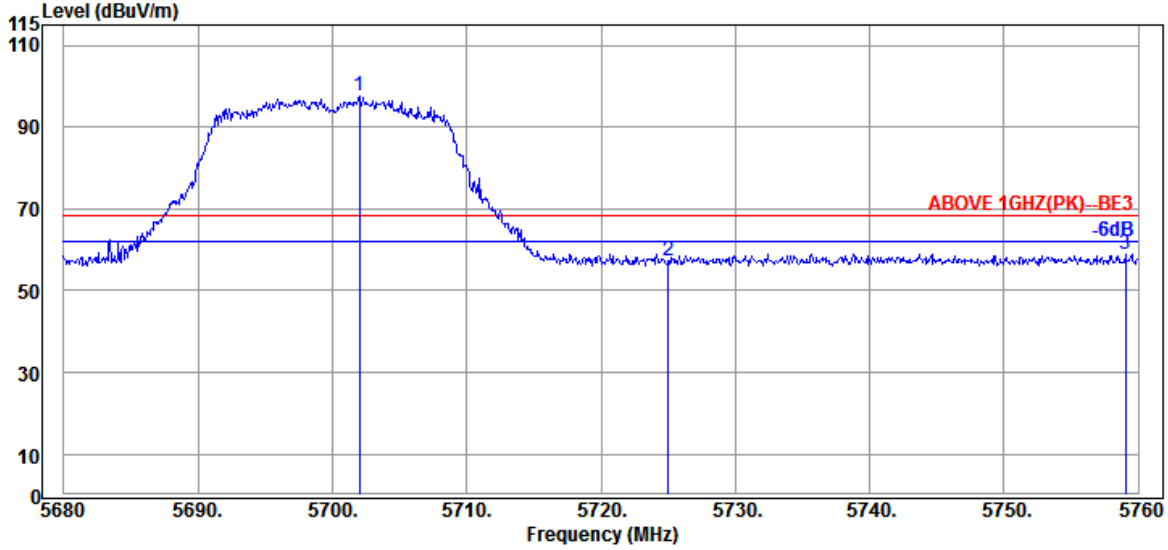

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.000	34.30	9.40	31.73	85.51	97.48	---	---	Peak
5725.040	34.50	9.42	31.74	44.93	57.11	68.20	11.09	Peak
5759.040	34.63	9.45	31.75	46.65	58.98	68.20	9.22	Peak

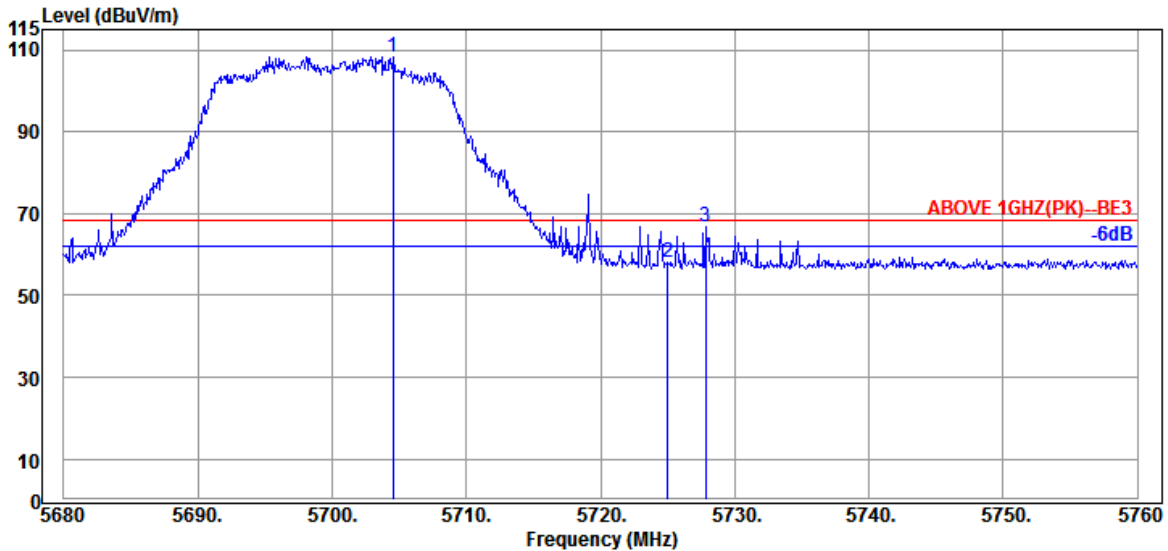


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.560	34.30	9.40	31.73	96.47	108.44	---	---	Peak
5725.040	34.50	9.42	31.74	45.99	58.17	68.20	10.03	Peak
5727.840	34.50	9.42	31.75	54.45	66.62	68.20	1.58	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

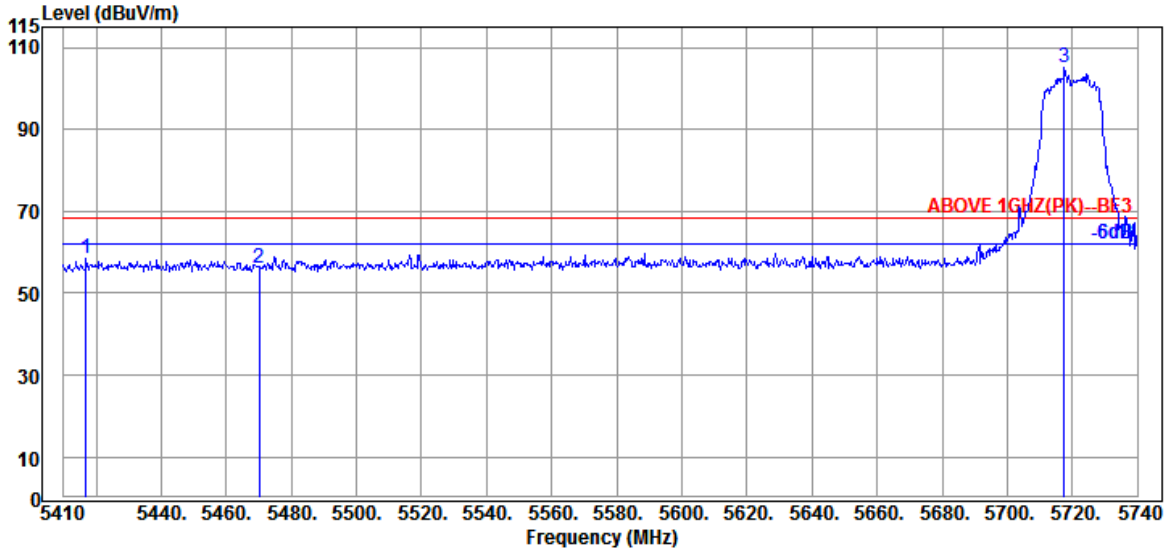

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5416.930	33.80	9.15	31.63	47.00	58.32	68.20	9.88	Peak
5470.060	33.97	9.20	31.63	44.70	56.24	68.20	11.96	Peak
@ 5717.560	34.40	9.42	31.74	93.20	105.28	---	---	Peak

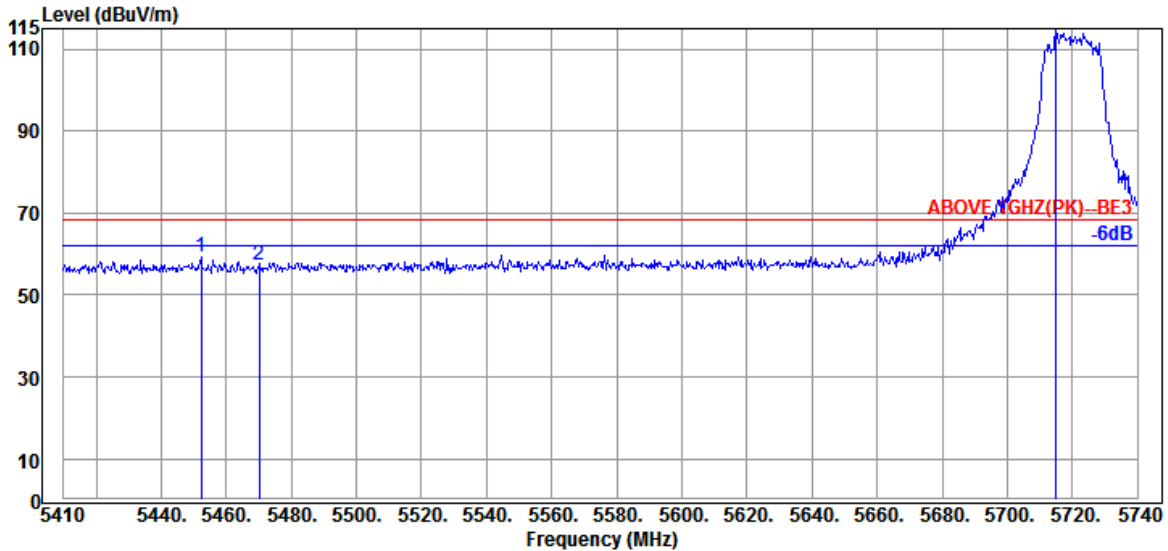


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.240	33.90	9.18	31.63	47.86	59.31	68.20	8.89	Peak
5470.060	33.97	9.20	31.63	45.74	57.28	68.20	10.92	Peak
@ 5714.920	34.40	9.40	31.74	102.53	114.59	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

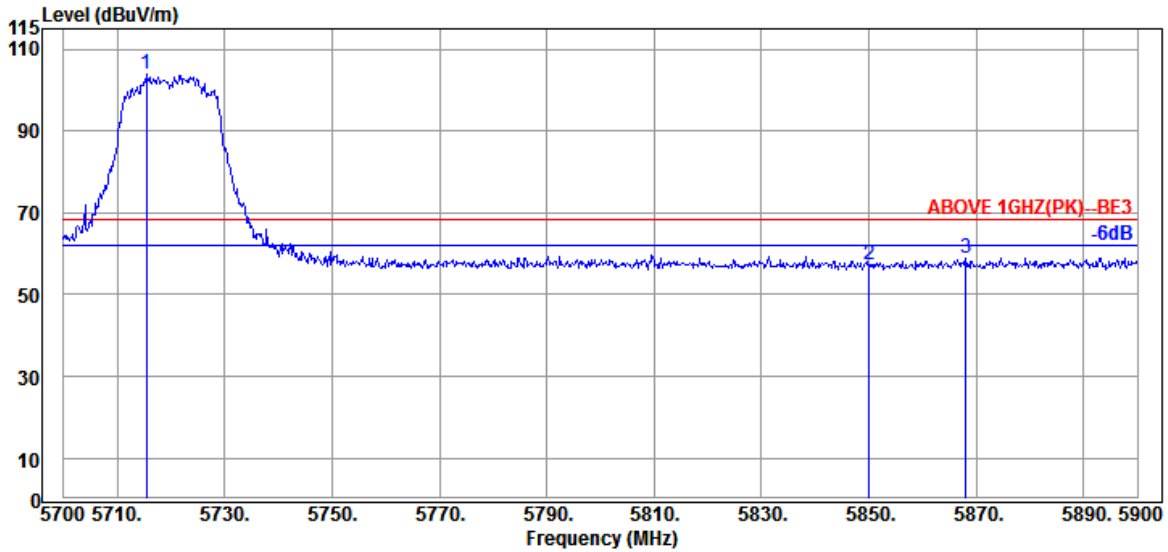

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5715.400	34.40	9.40	31.74	91.94	104.00	---	---	Peak
5850.000	35.00	9.52	31.80	44.42	57.14	68.20	11.06	Peak
5868.000	35.03	9.53	31.81	46.29	59.04	68.20	9.16	Peak

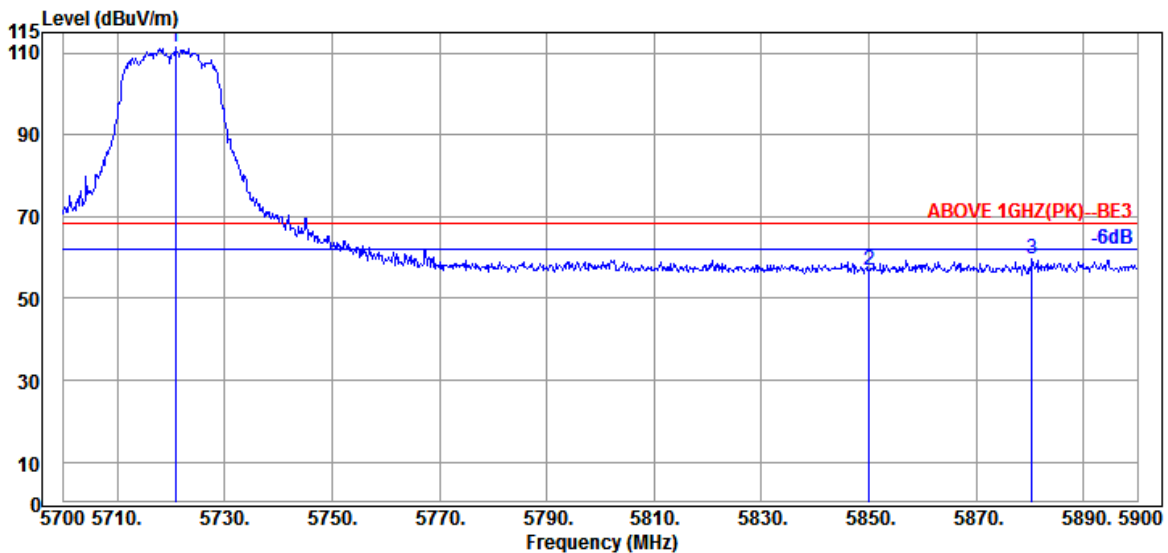


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5720.800	34.40	9.42	31.74	99.32	111.40	---	---	Peak
5850.000	35.00	9.52	31.80	44.27	56.99	68.20	11.21	Peak
5880.400	35.07	9.55	31.82	46.76	59.56	68.20	8.64	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

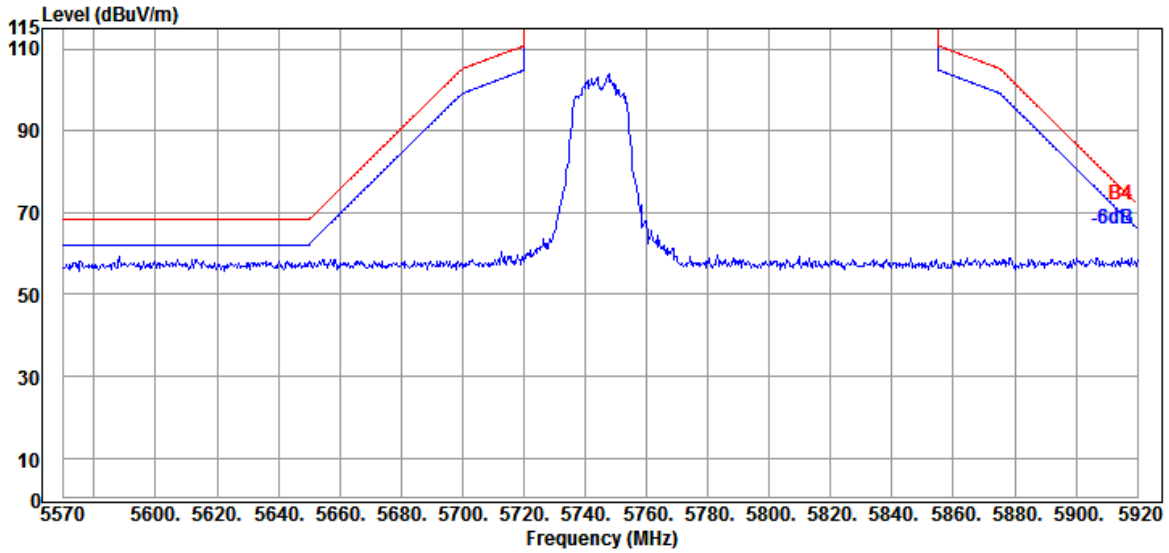


Antenna at Vertical Polarization

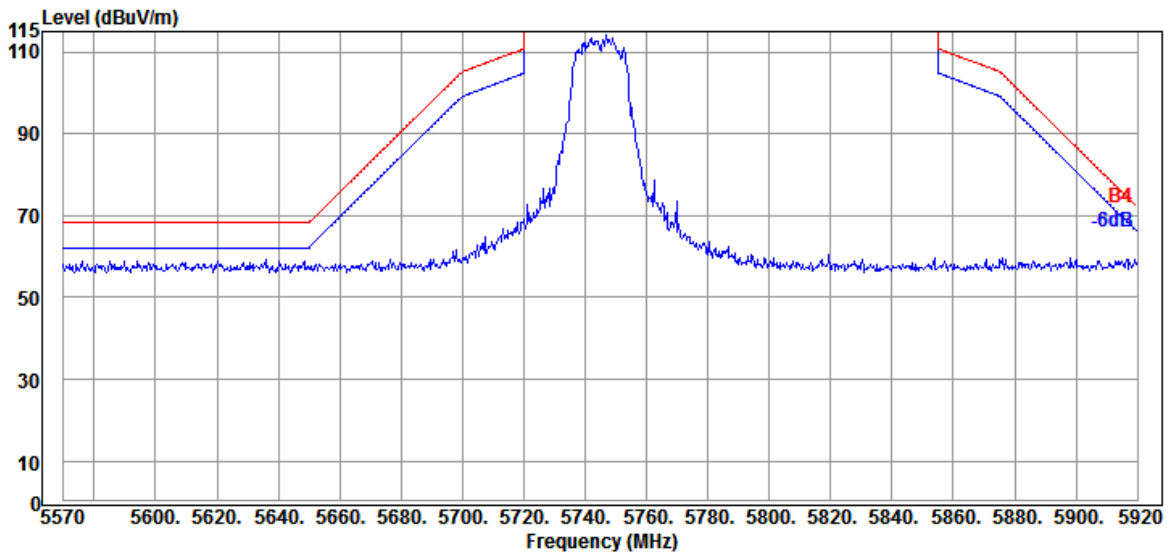


Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

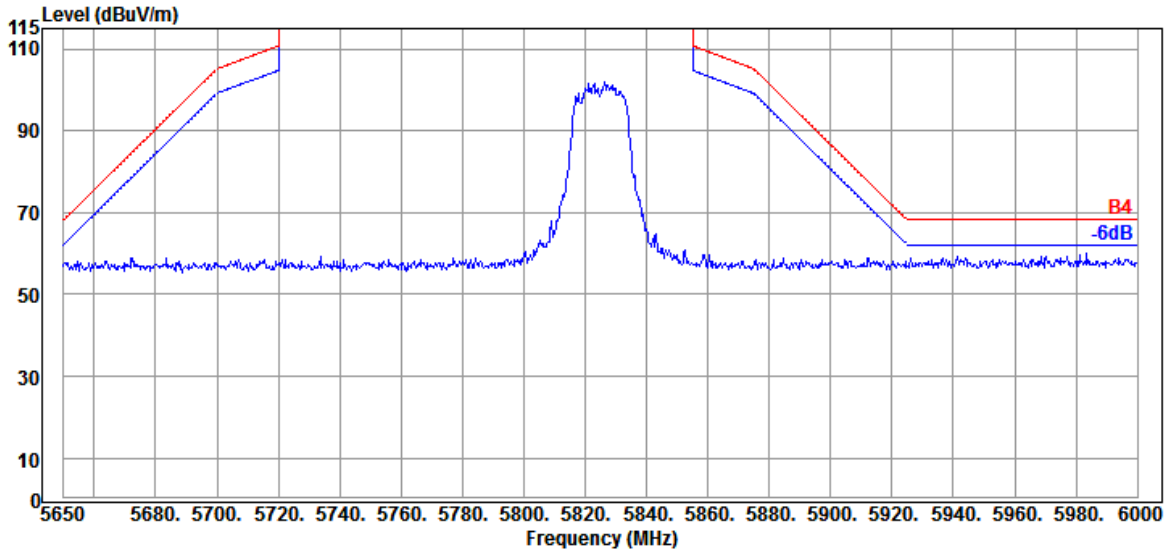

Antenna at Vertical Polarization

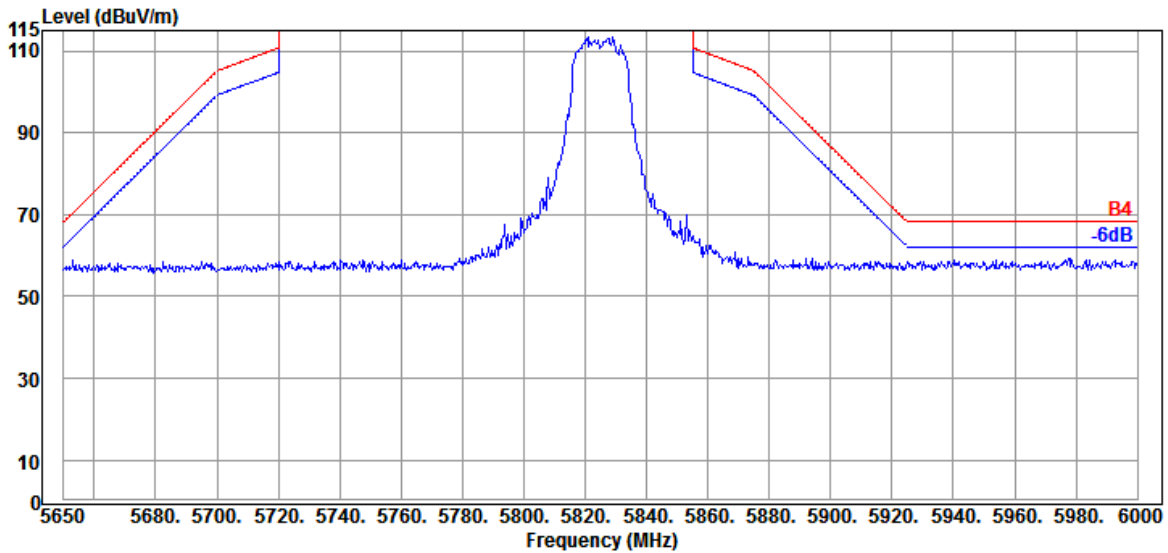


Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

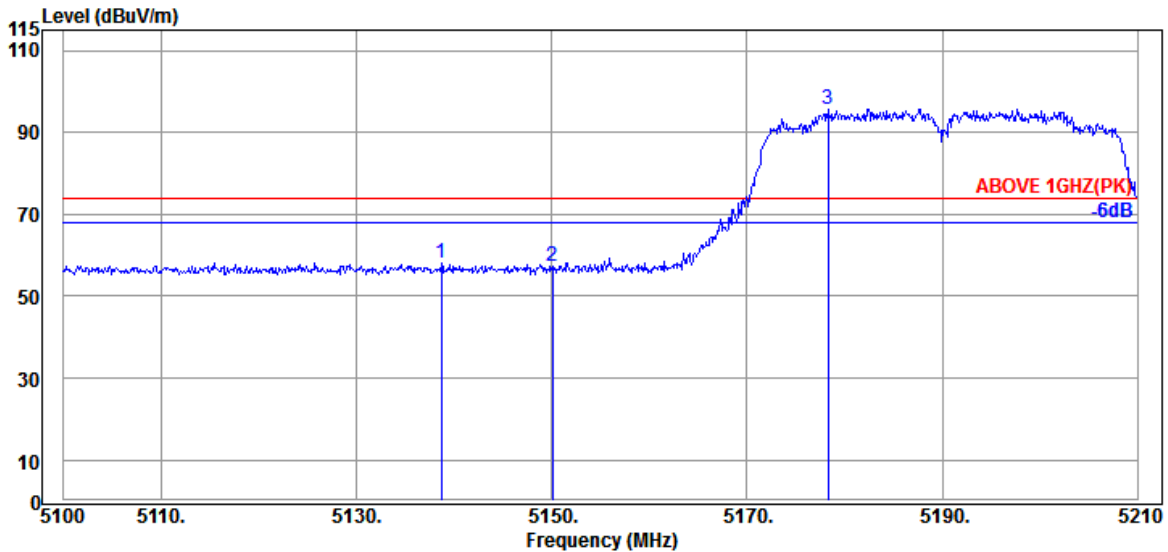

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.720	33.07	8.91	31.63	47.68	58.03	74.00	15.97	Peak
5150.050	33.10	8.92	31.63	46.89	57.28	74.00	16.72	Peak
@ 5178.320	33.17	8.95	31.63	85.21	95.70	---	---	Peak

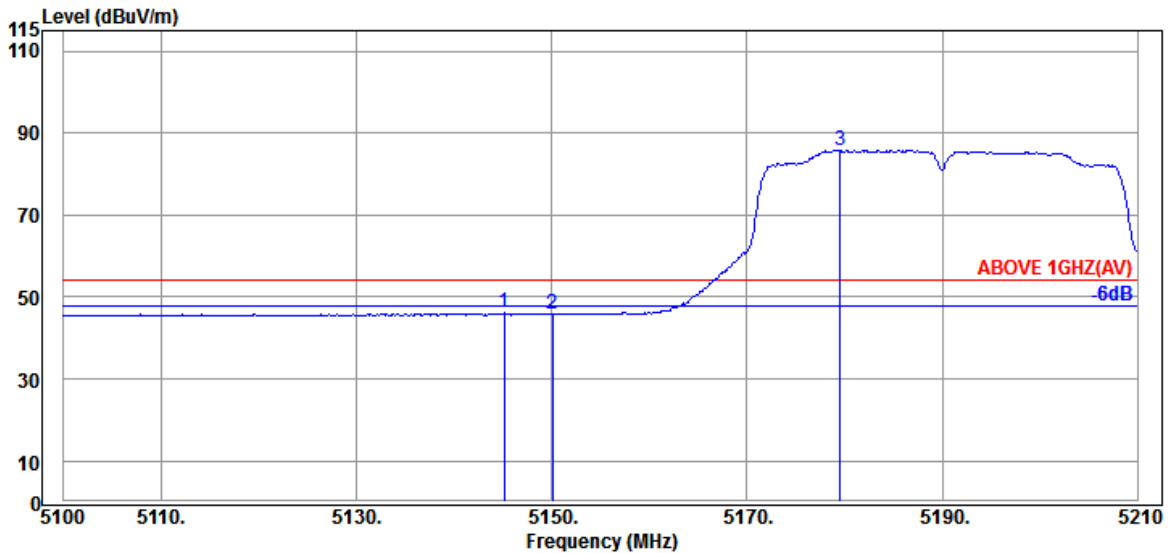


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.100	33.10	8.92	31.63	35.65	46.04	54.00	7.96	Average
5150.050	33.10	8.92	31.63	35.36	45.75	54.00	8.25	Average
@ 5179.530	33.17	8.95	31.63	75.34	85.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

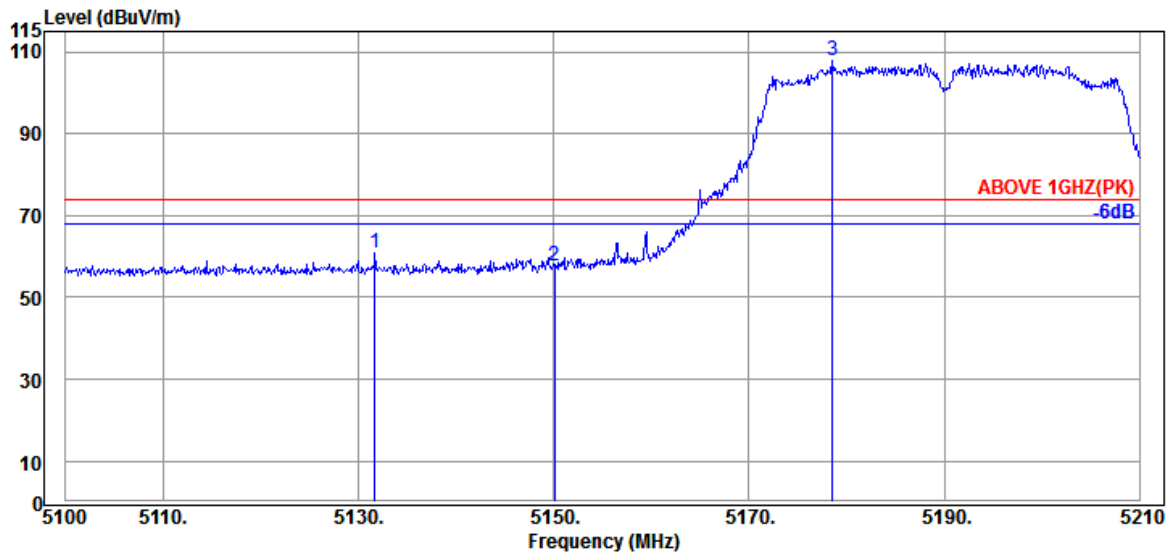

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.680	33.07	8.91	31.63	50.48	60.83	74.00	13.17	Peak
5150.050	33.10	8.92	31.63	47.31	57.70	74.00	16.30	Peak
@ 5178.540	33.17	8.95	31.63	97.38	107.87	---	---	Peak

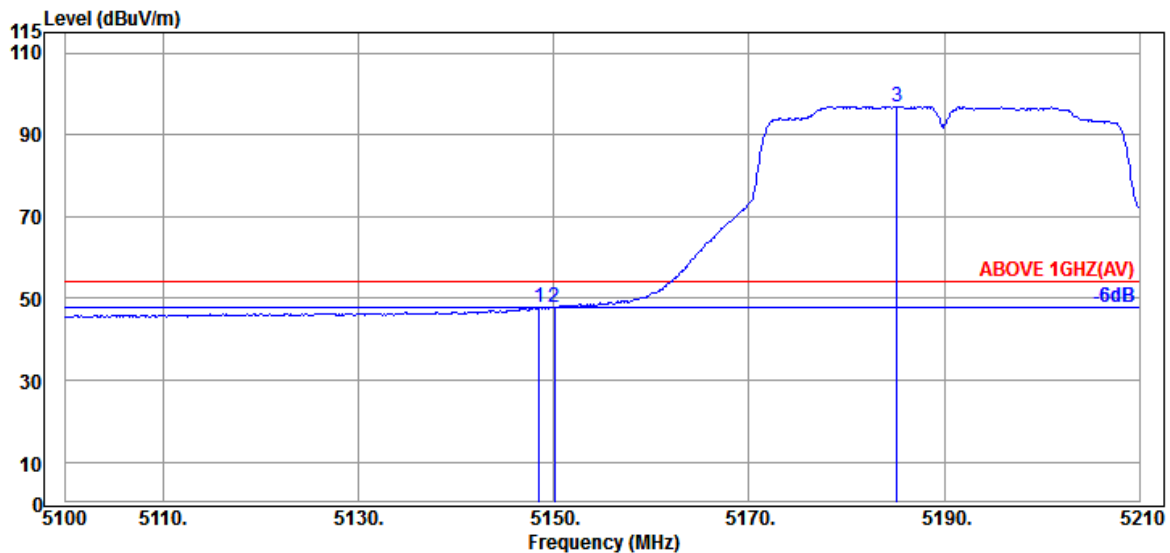


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	33.10	8.92	31.63	37.53	47.92	54.00	6.08	Average
5150.050	33.10	8.92	31.63	37.42	47.81	54.00	6.19	Average
@ 5185.140	33.17	8.95	31.63	86.45	96.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

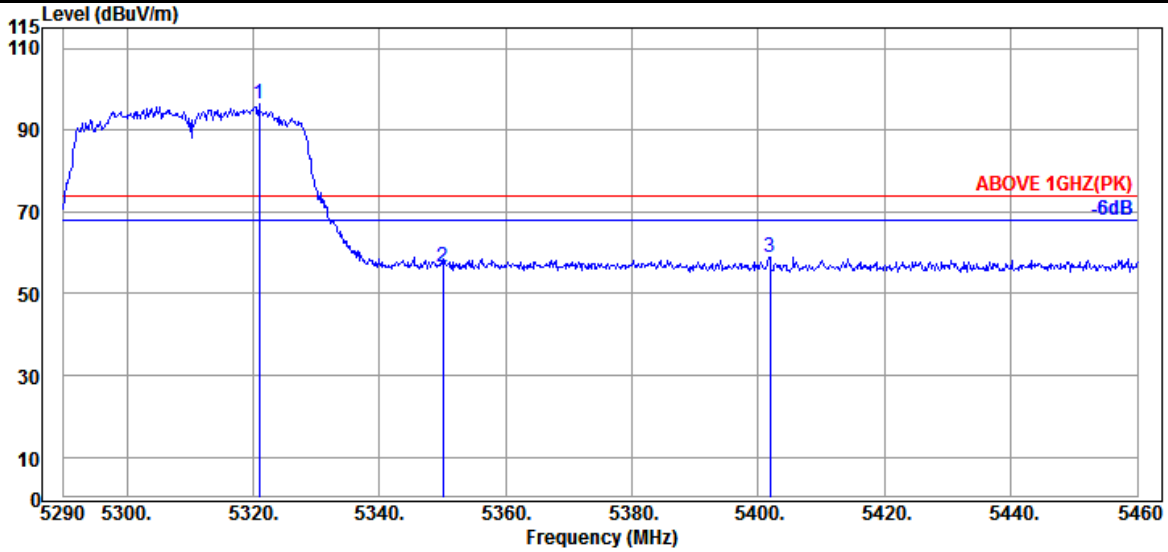

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5320.940	33.30	9.07	31.63	85.77	96.51	---	---	Peak
5350.010	33.50	9.10	31.63	45.67	56.64	74.00	17.36	Peak
5401.860	33.75	9.14	31.63	47.76	59.02	74.00	14.98	Peak

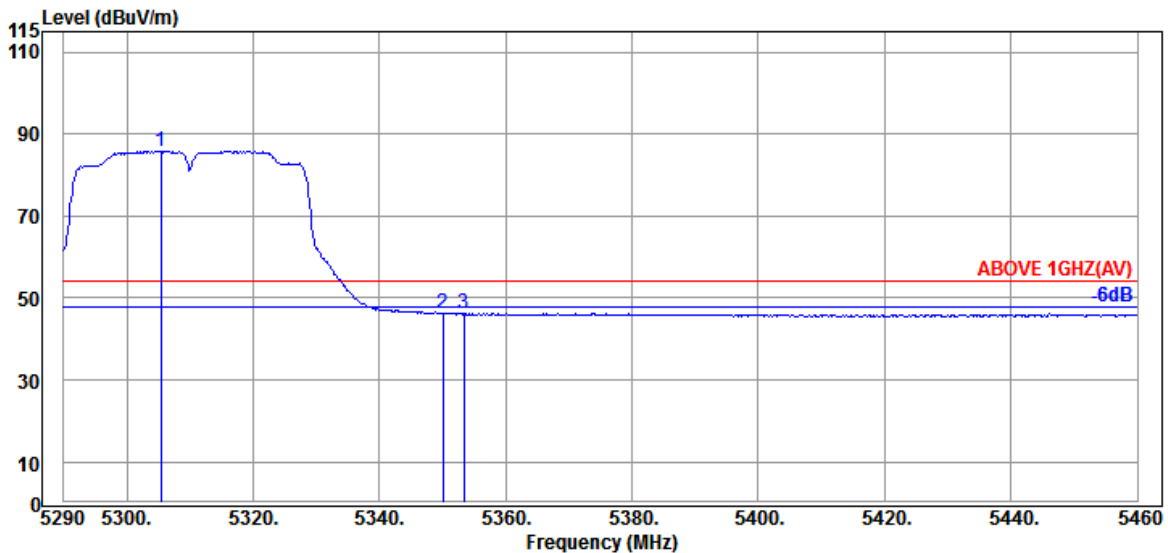


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5305.470	33.20	9.05	31.63	75.26	85.88	---	---	Average
5350.010	33.50	9.10	31.63	35.27	46.24	54.00	7.76	Average
5353.410	33.50	9.10	31.63	35.33	46.30	54.00	7.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

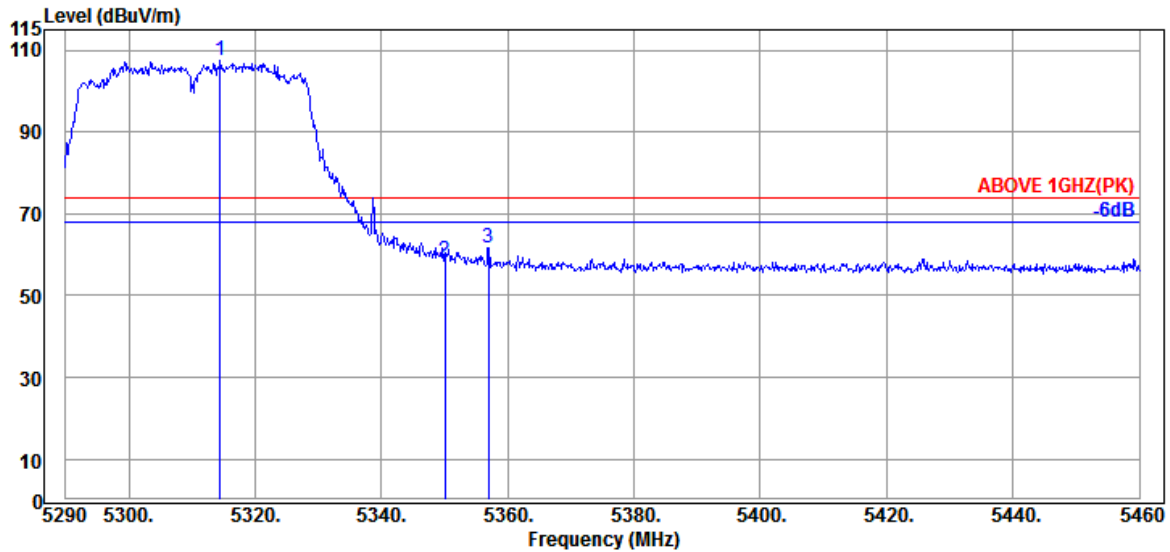

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.480	33.30	9.07	31.63	96.56	107.30	---	---	Peak
5350.010	33.50	9.10	31.63	47.65	58.62	74.00	15.38	Peak
5356.980	33.57	9.10	31.63	50.79	61.83	74.00	12.17	Peak

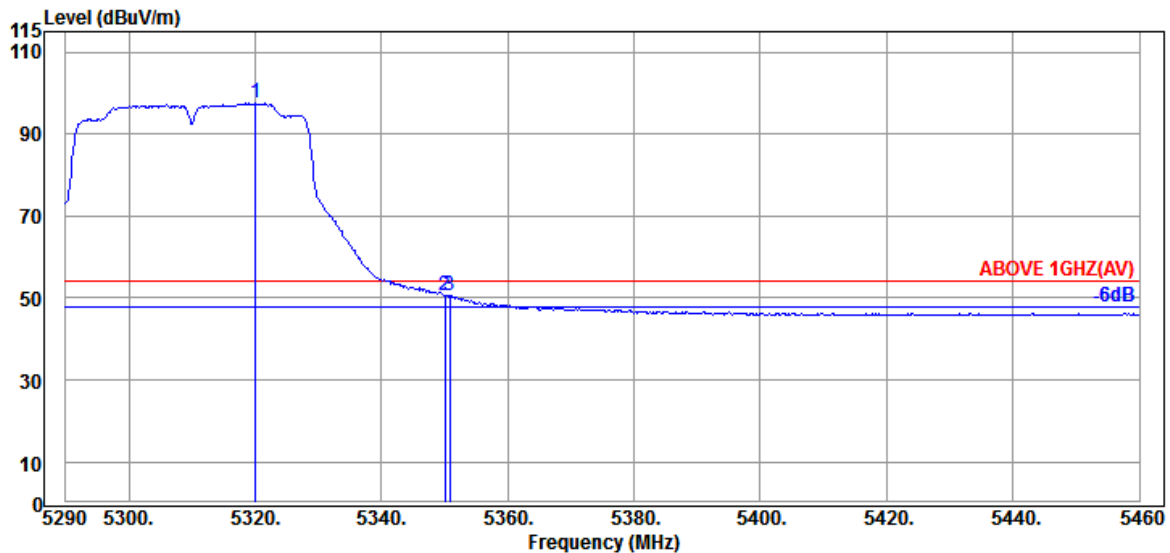


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.090	33.30	9.07	31.63	86.75	97.49	---	---	Average
5350.010	33.50	9.10	31.63	39.59	50.56	54.00	3.44	Average
5350.860	33.50	9.10	31.63	39.77	50.74	54.00	3.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

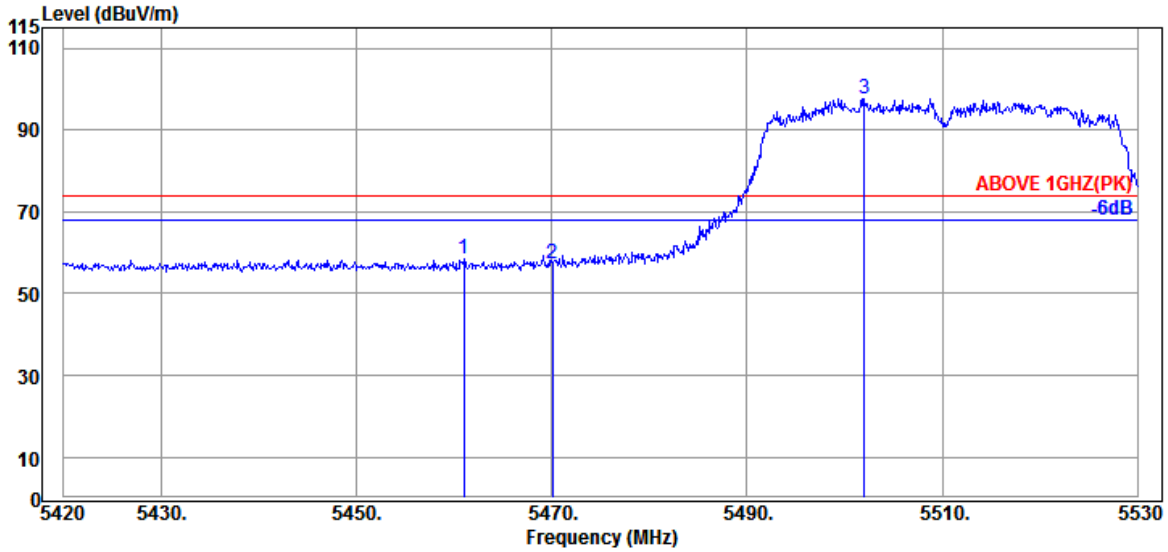

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.030	33.90	9.18	31.63	47.06	58.51	74.00	15.49	Peak
5470.050	33.97	9.20	31.63	45.92	57.46	74.00	16.54	Peak
@ 5502.060	34.10	9.23	31.63	86.00	97.70	---	---	Peak

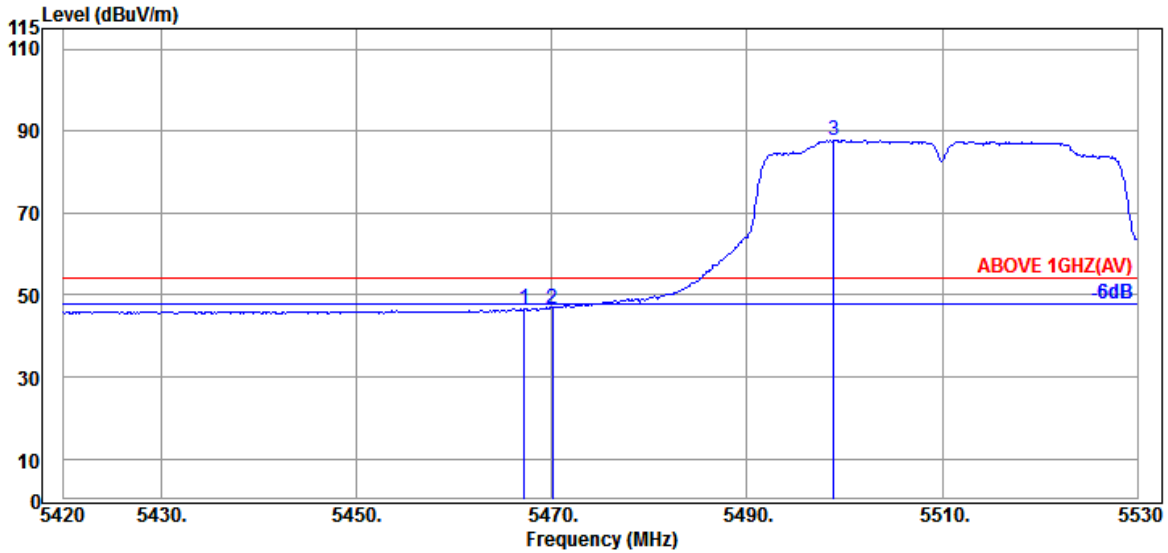


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.190	33.97	9.20	31.63	35.18	46.72	54.00	7.28	Average
5470.050	33.97	9.20	31.63	35.21	46.75	54.00	7.25	Average
@ 5498.870	34.10	9.23	31.63	76.22	87.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

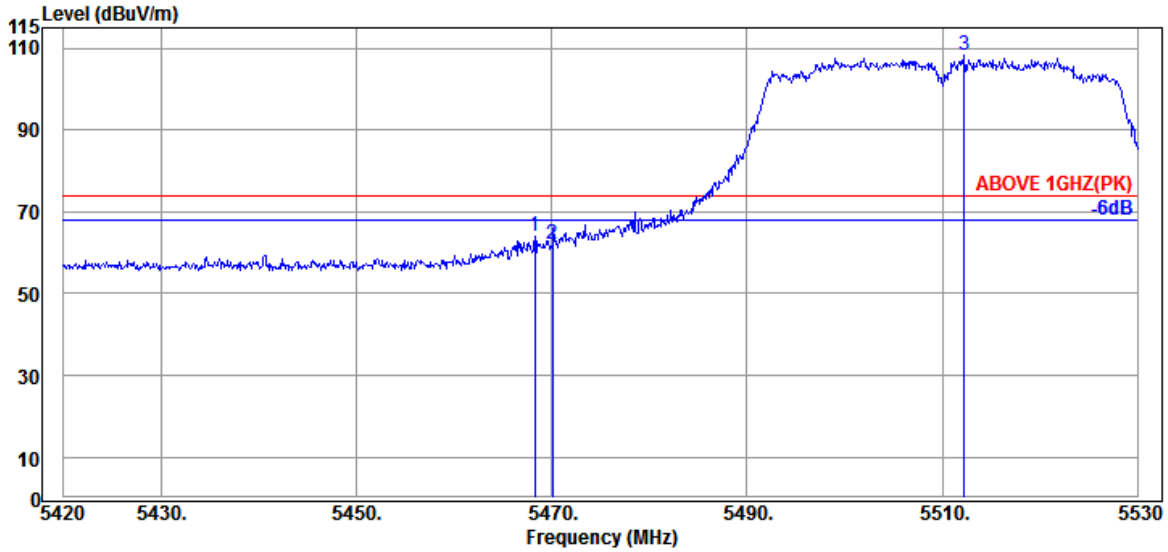

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	33.97	9.20	31.63	52.48	64.02	74.00	9.98	Peak
5470.050	33.97	9.20	31.63	50.46	62.00	74.00	12.00	Peak
@ 5512.290	34.13	9.23	31.64	96.45	108.17	---	---	Peak

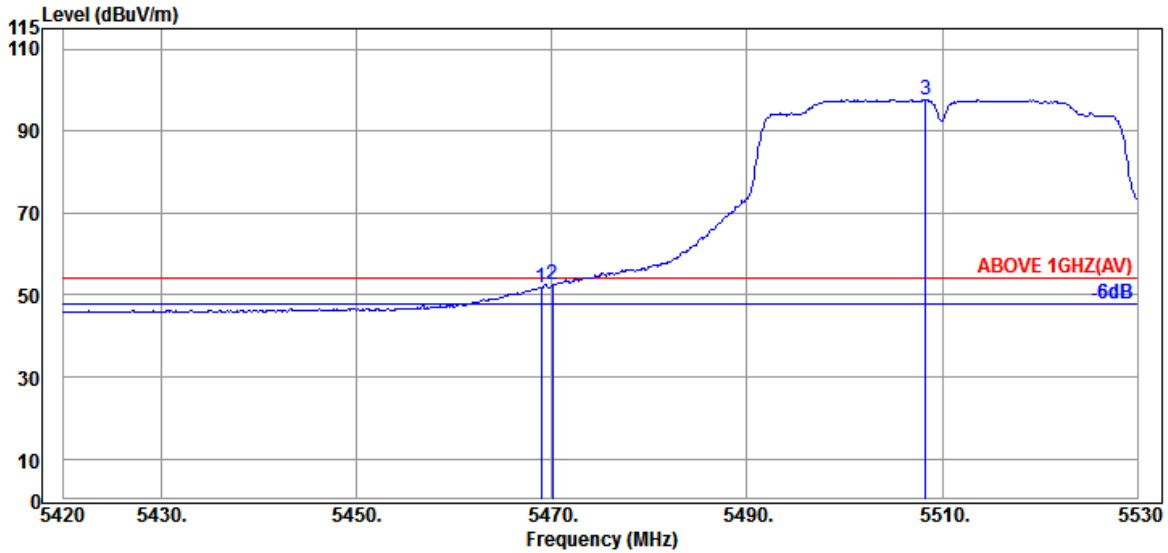


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	33.97	9.20	31.63	40.15	51.69	54.00	2.31	Average
5470.050	33.97	9.20	31.63	40.91	52.45	54.00	1.55	Average
@ 5508.330	34.10	9.23	31.64	85.93	97.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

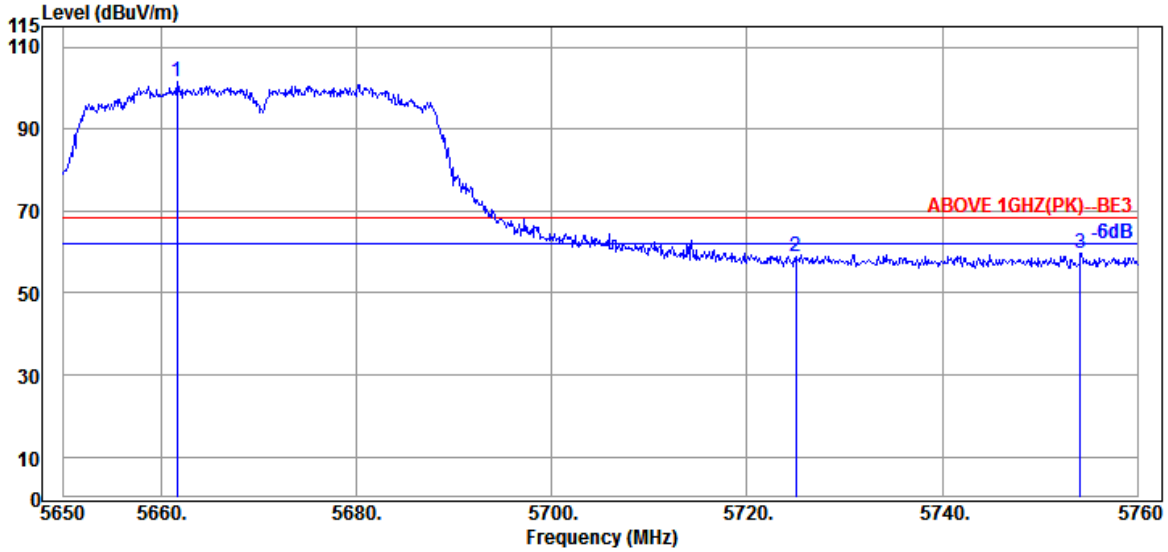

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.660	34.30	9.36	31.71	89.45	101.40	---	---	Peak
5725.020	34.50	9.42	31.74	46.60	58.78	68.20	9.42	Peak
5754.170	34.60	9.45	31.75	47.29	59.59	68.20	8.61	Peak

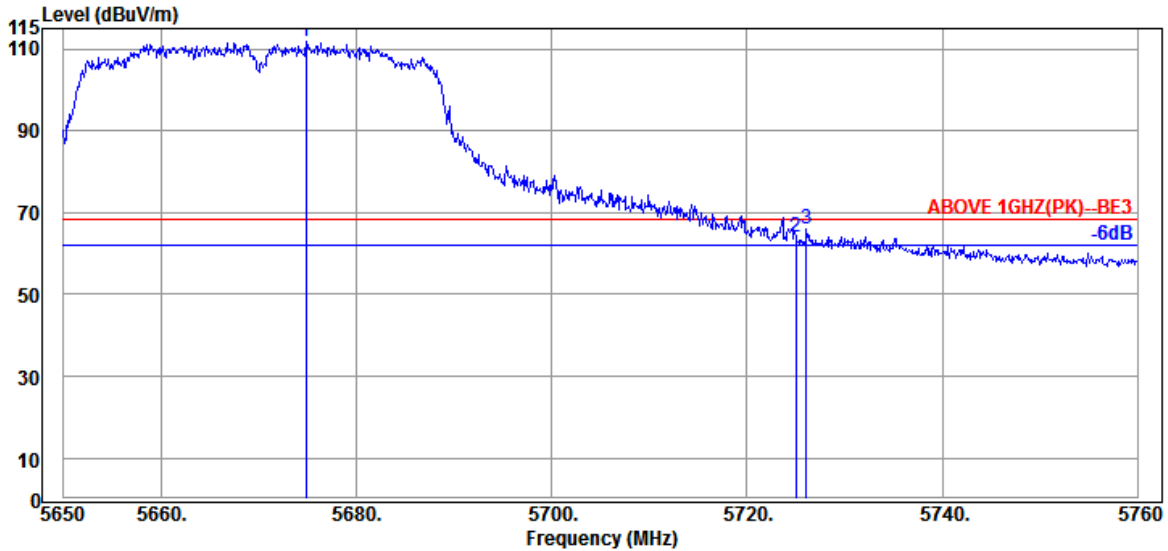


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.860	34.30	9.37	31.72	99.81	111.76	---	---	Peak
5725.020	34.50	9.42	31.74	51.92	64.10	68.20	4.10	Peak
5726.120	34.50	9.42	31.74	53.74	65.92	68.20	2.28	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

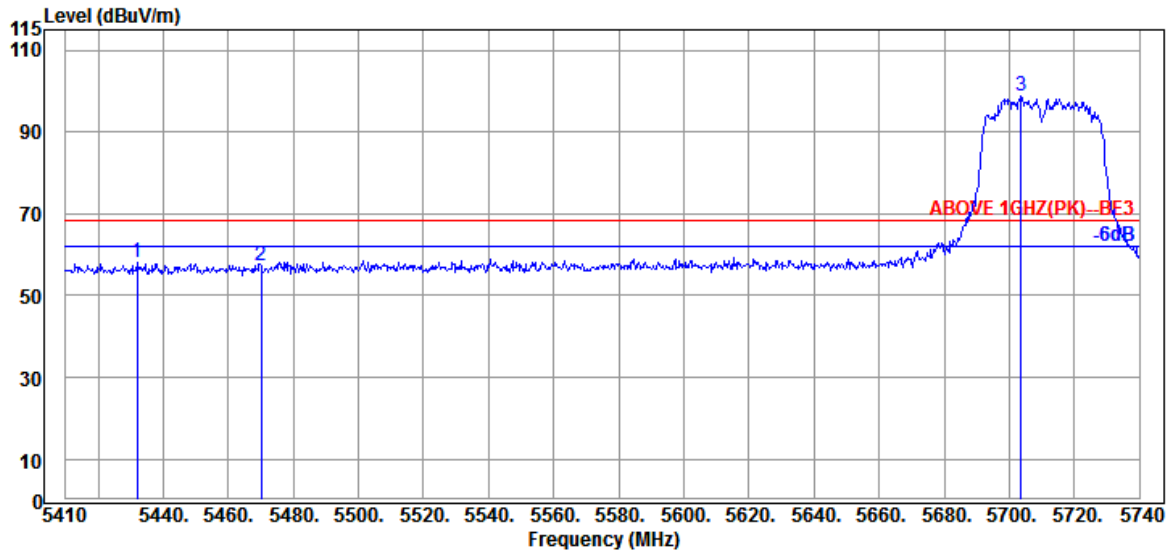

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.110	33.85	9.17	31.63	46.84	58.23	68.20	9.97	Peak
5470.060	33.97	9.20	31.63	45.77	57.31	68.20	10.89	Peak
@ 5703.700	34.30	9.40	31.73	86.95	98.92	---	---	Peak

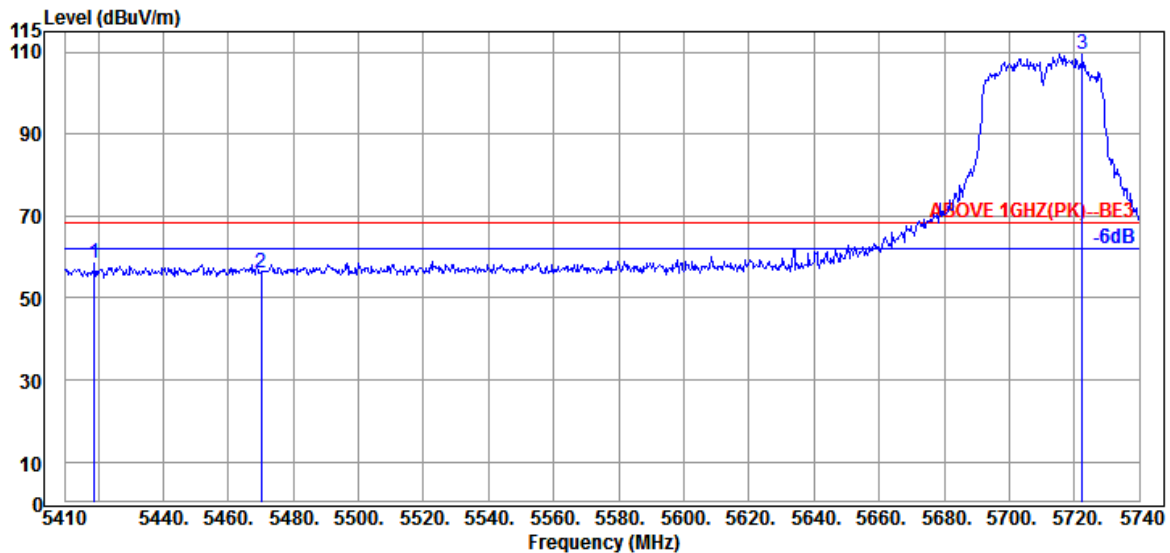


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.910	33.80	9.15	31.63	47.20	58.52	68.20	9.68	Peak
5470.060	33.97	9.20	31.63	44.45	55.99	68.20	12.21	Peak
@ 5722.510	34.50	9.42	31.74	97.30	109.48	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

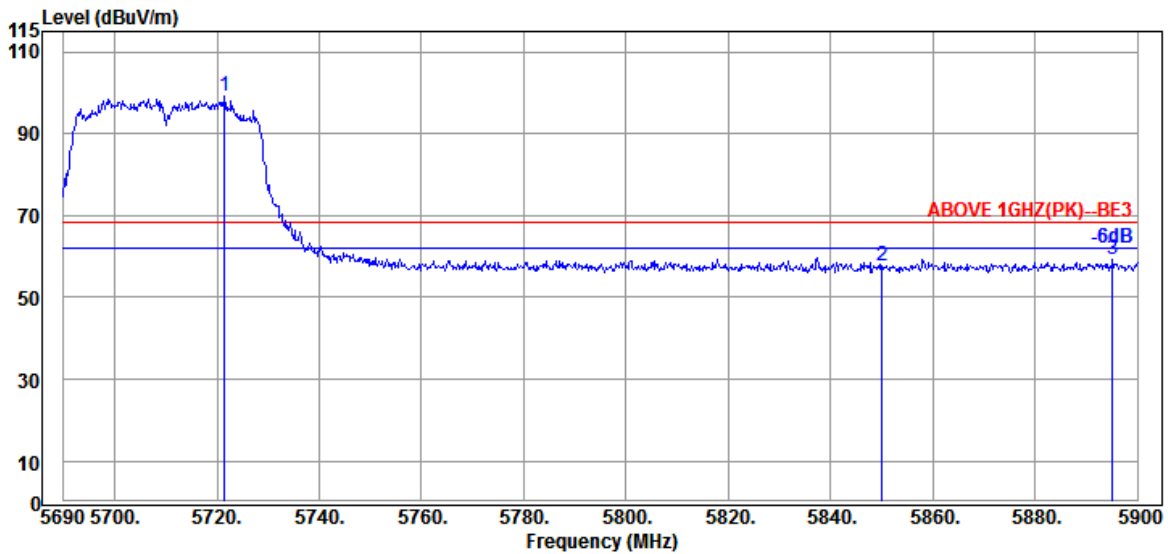

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5721.500	34.40	9.42	31.74	87.02	99.10	---	---	Peak
5850.020	35.00	9.52	31.80	44.83	57.55	68.20	10.65	Peak
5895.170	35.10	9.56	31.82	46.46	59.30	68.20	8.90	Peak

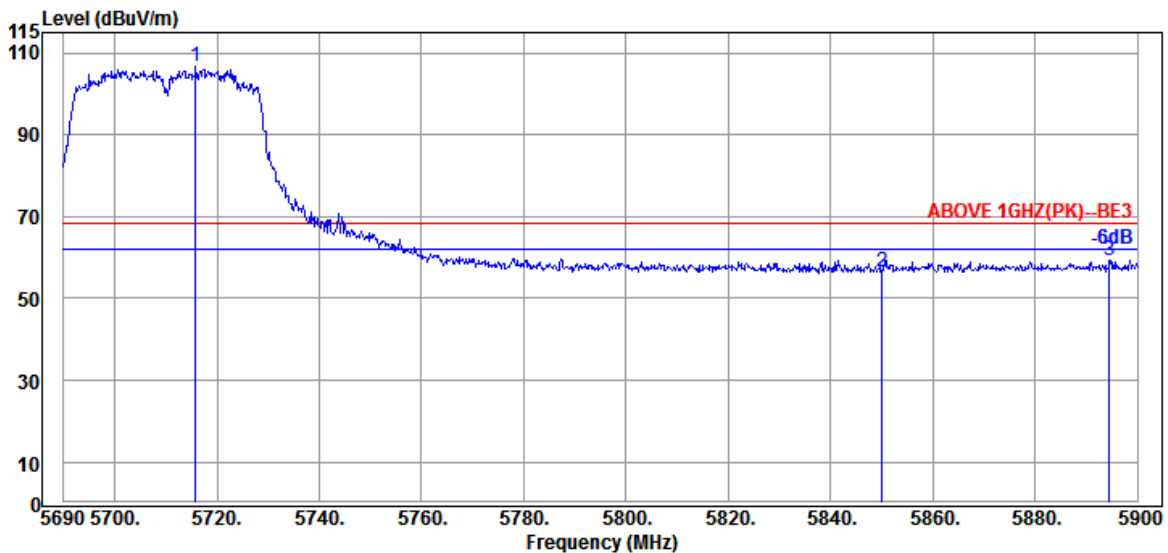


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5715.830	34.40	9.40	31.74	94.45	106.51	---	---	Peak
5850.020	35.00	9.52	31.80	43.84	56.56	68.20	11.64	Peak
5894.540	35.10	9.56	31.82	46.52	59.36	68.20	8.84	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

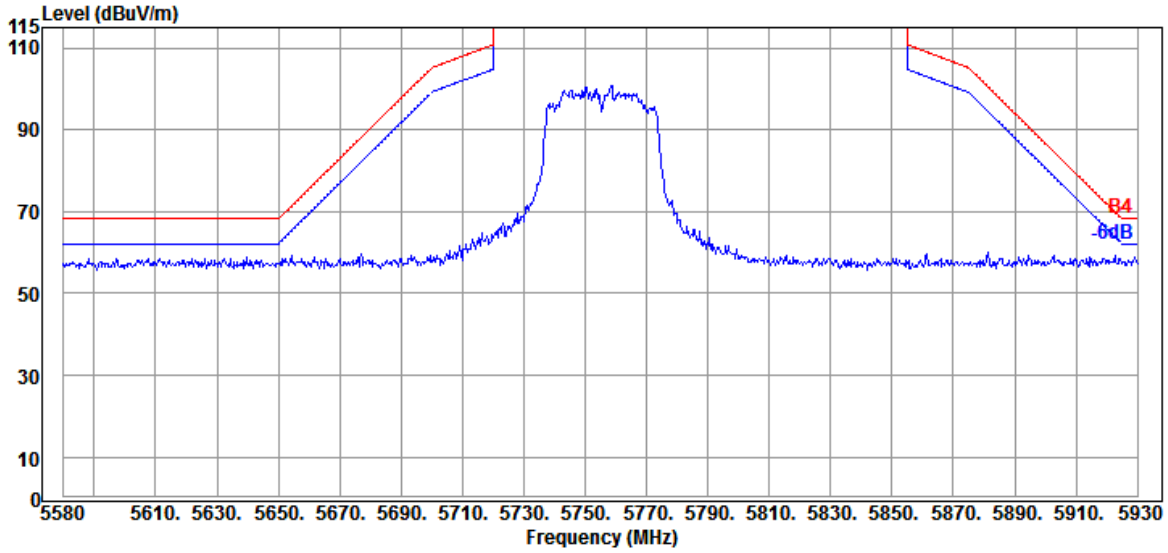


Antenna at Vertical Polarization

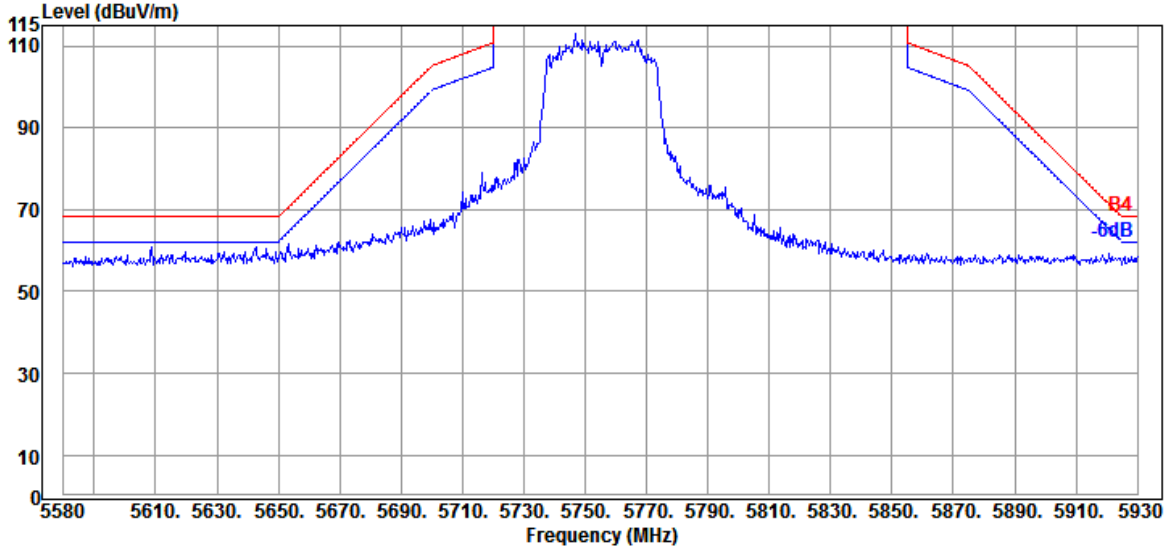


Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

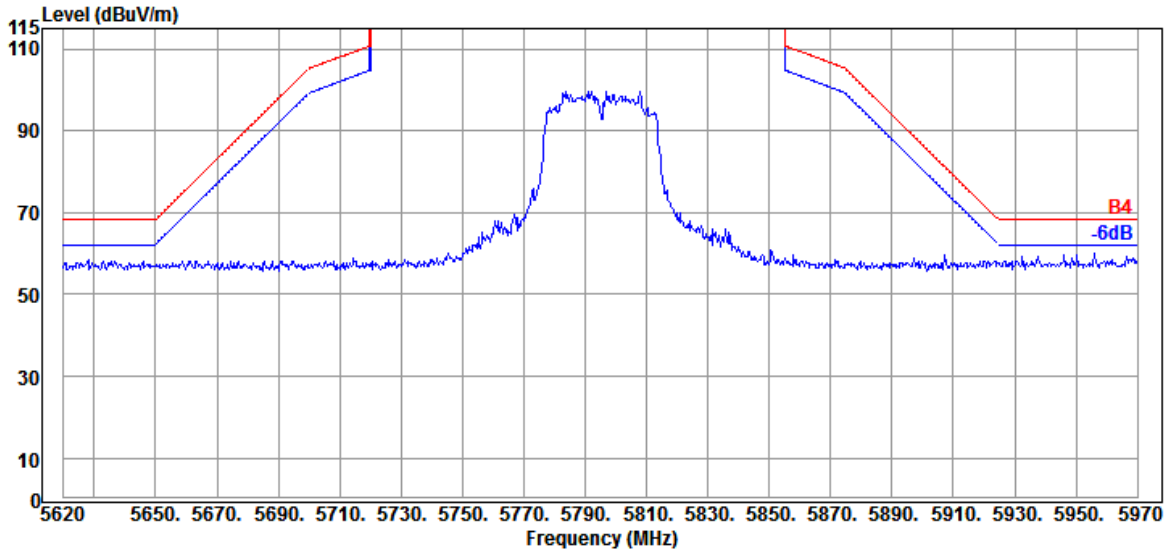

Antenna at Vertical Polarization

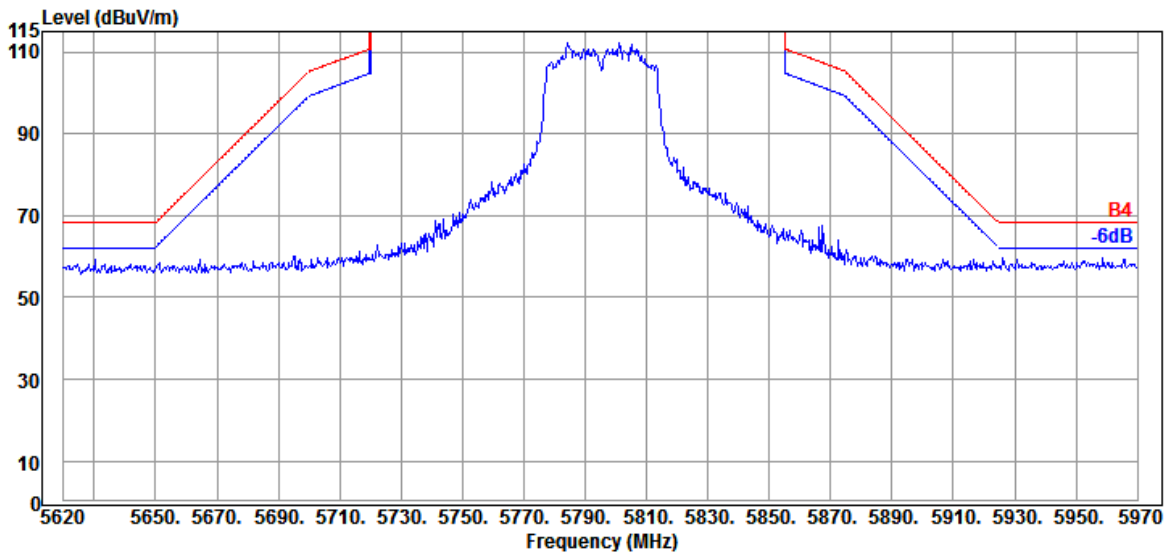


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

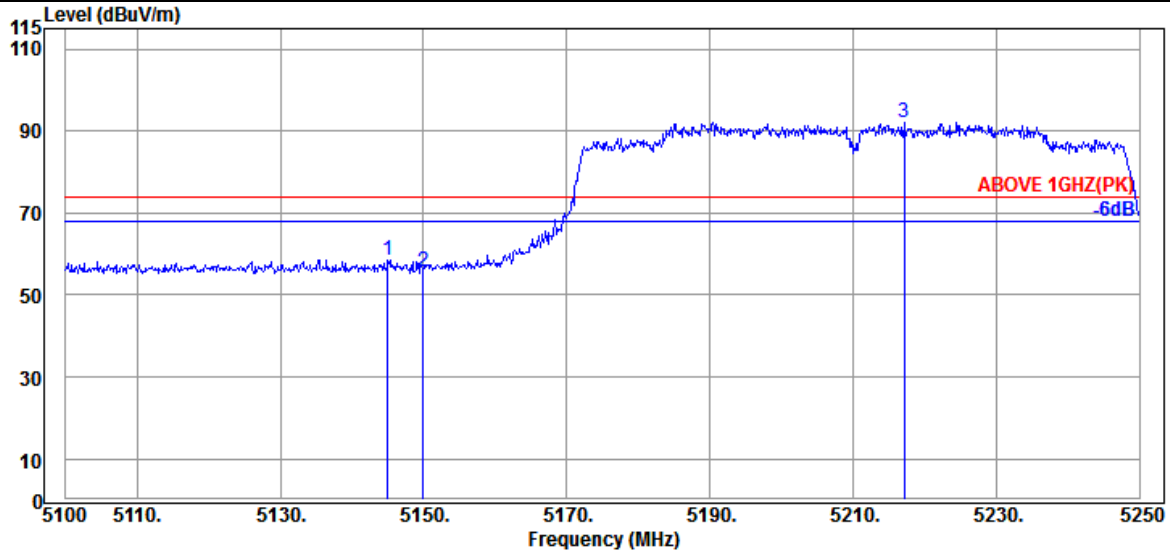

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	33.10	8.92	31.63	48.24	58.63	74.00	15.37	Peak
5149.950	33.10	8.92	31.63	45.50	55.89	74.00	18.11	Peak
@ 5217.150	33.15	8.98	31.63	81.59	92.09	---	---	Peak

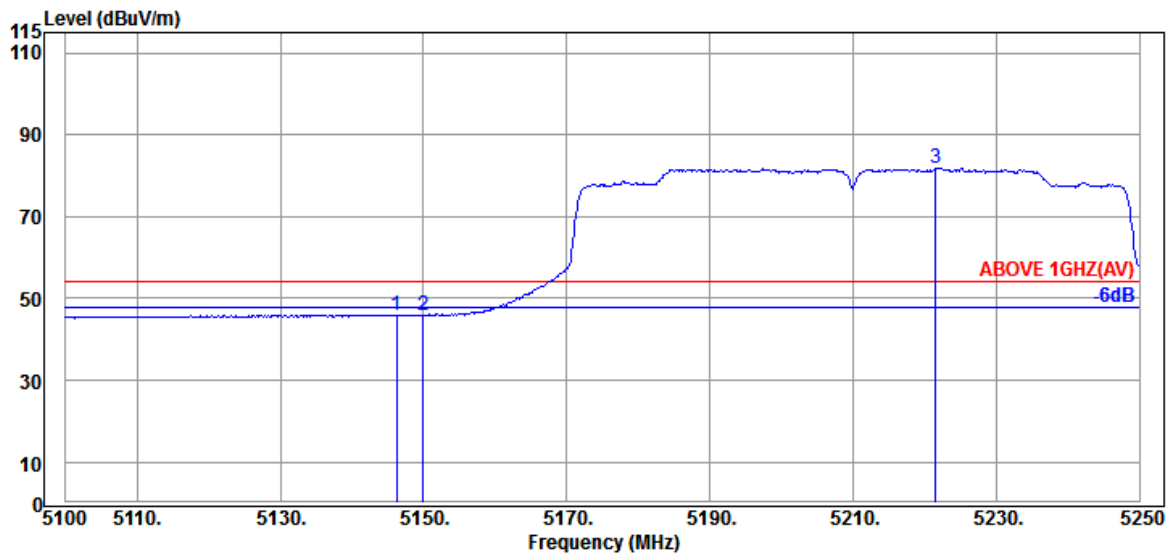


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.10	8.92	31.63	35.65	46.04	54.00	7.96	Average
5149.950	33.10	8.92	31.63	35.52	45.91	54.00	8.09	Average
@ 5221.500	33.15	8.98	31.63	71.33	81.83	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

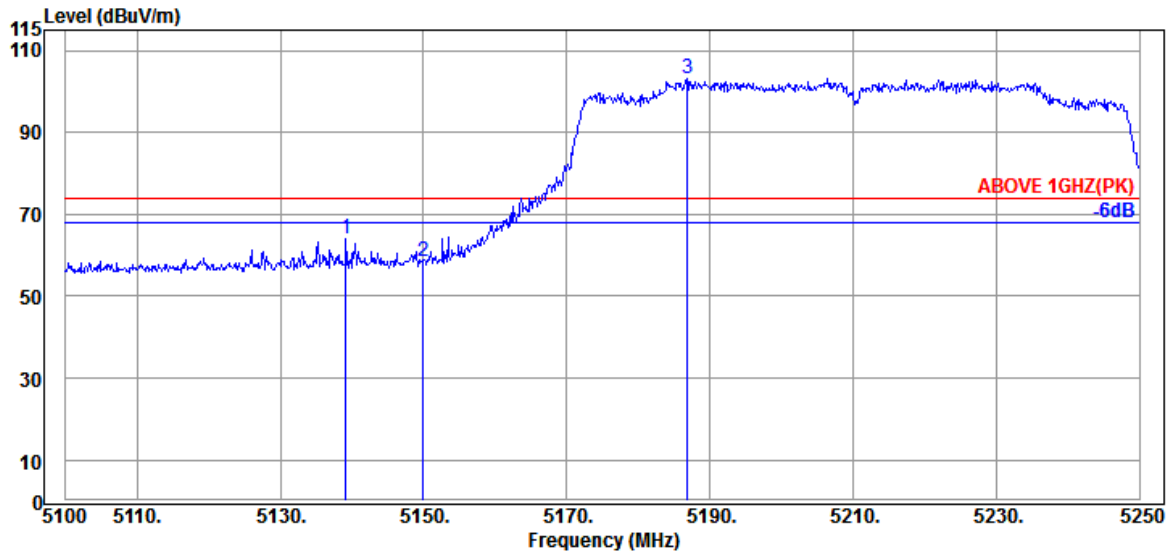

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.150	33.07	8.91	31.63	53.49	63.84	74.00	10.16	Peak
5149.950	33.10	8.92	31.63	48.09	58.48	74.00	15.52	Peak
@ 5186.850	33.20	8.95	31.63	92.56	103.08	---	---	Peak

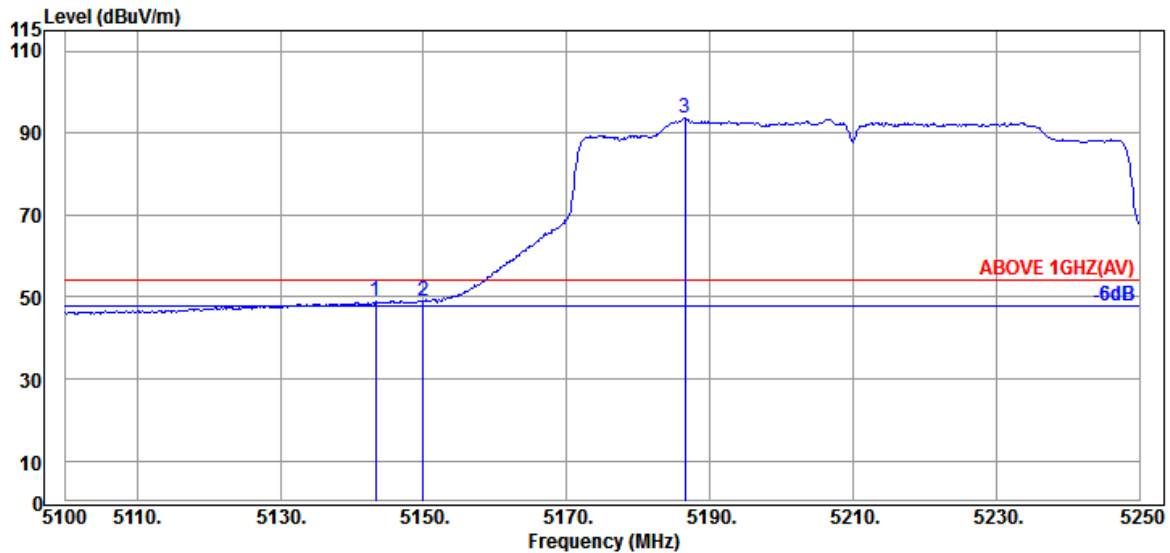


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.350	33.10	8.92	31.63	38.57	48.96	54.00	5.04	Average
5149.950	33.10	8.92	31.63	38.50	48.89	54.00	5.11	Average
@ 5186.550	33.20	8.95	31.63	83.01	93.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

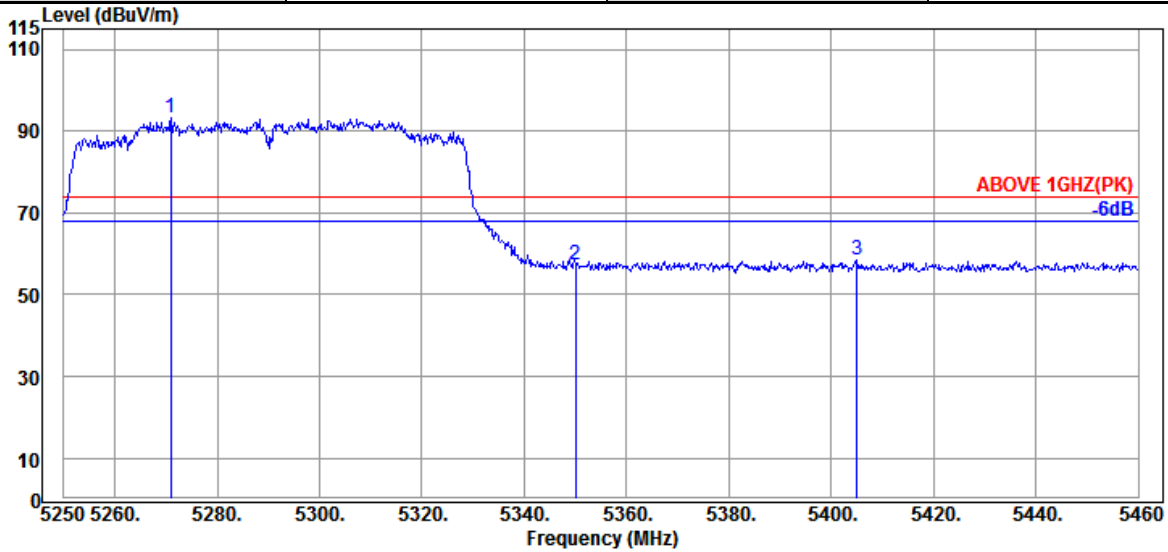

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5271.000	33.13	9.02	31.63	82.67	93.19	---	---	Peak
5349.960	33.50	9.10	31.63	46.28	57.25	74.00	16.75	Peak
5404.980	33.75	9.14	31.63	47.11	58.37	74.00	15.63	Peak

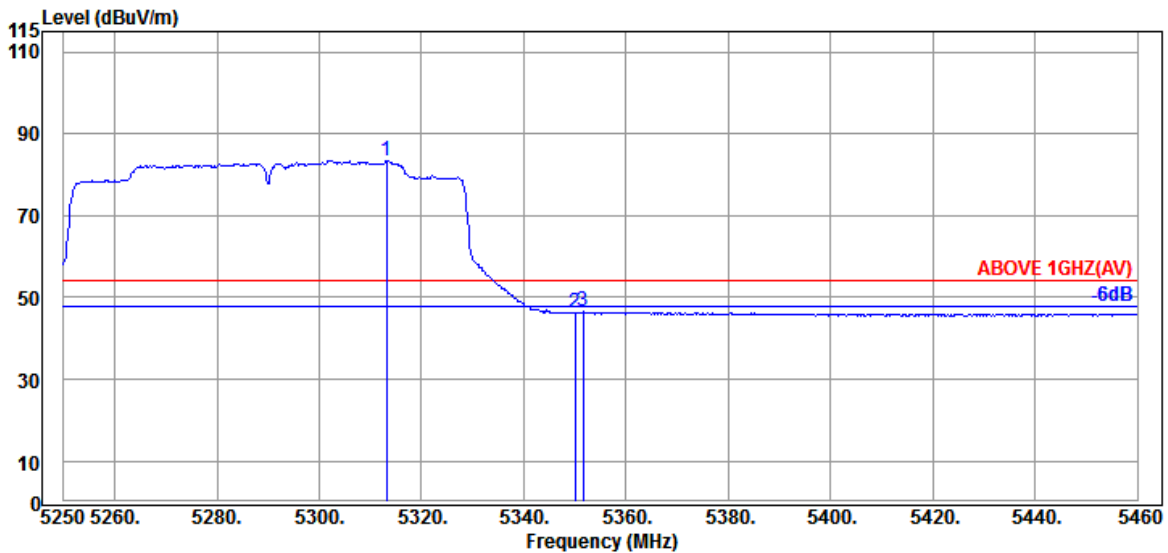


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.210	33.30	9.07	31.63	72.72	83.46	---	---	Average
5349.960	33.50	9.10	31.63	35.34	46.31	54.00	7.69	Average
5351.640	33.50	9.10	31.63	35.47	46.44	54.00	7.56	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

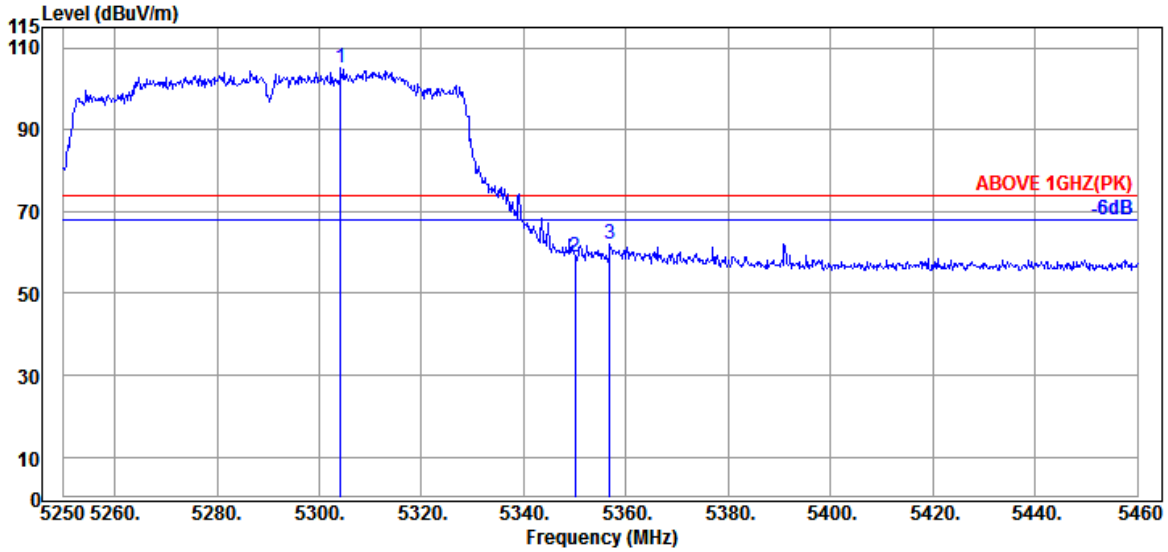

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.180	33.20	9.05	31.63	94.41	105.03	---	---	Peak
5349.960	33.50	9.10	31.63	47.84	58.81	74.00	15.19	Peak
5356.890	33.57	9.10	31.63	51.13	62.17	74.00	11.83	Peak

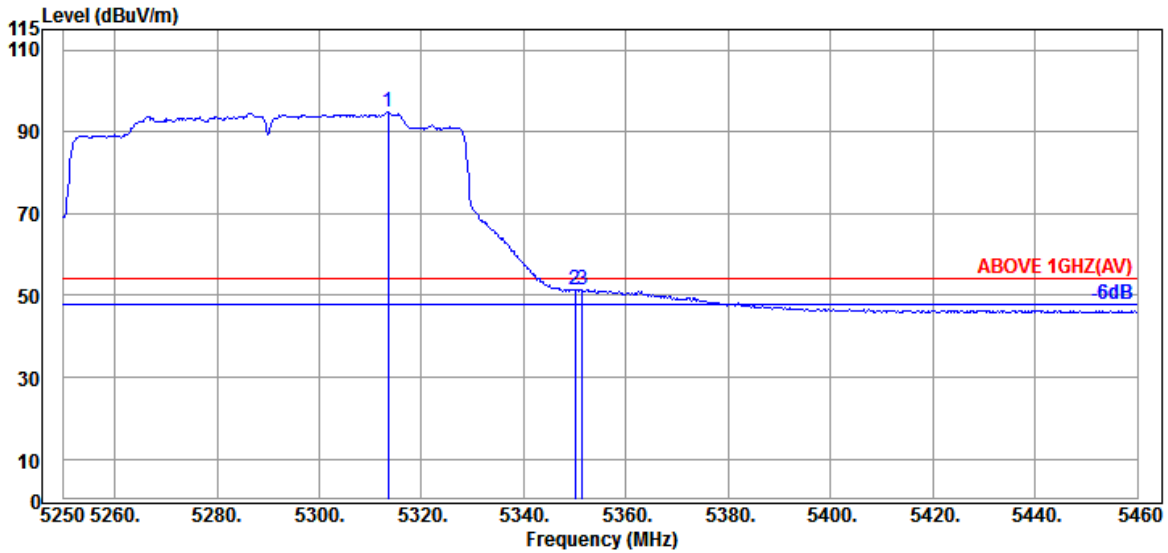


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.420	33.30	9.07	31.63	83.96	94.70	---	---	Average
5349.960	33.50	9.10	31.63	40.23	51.20	54.00	2.80	Average
5351.430	33.50	9.10	31.63	40.52	51.49	54.00	2.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

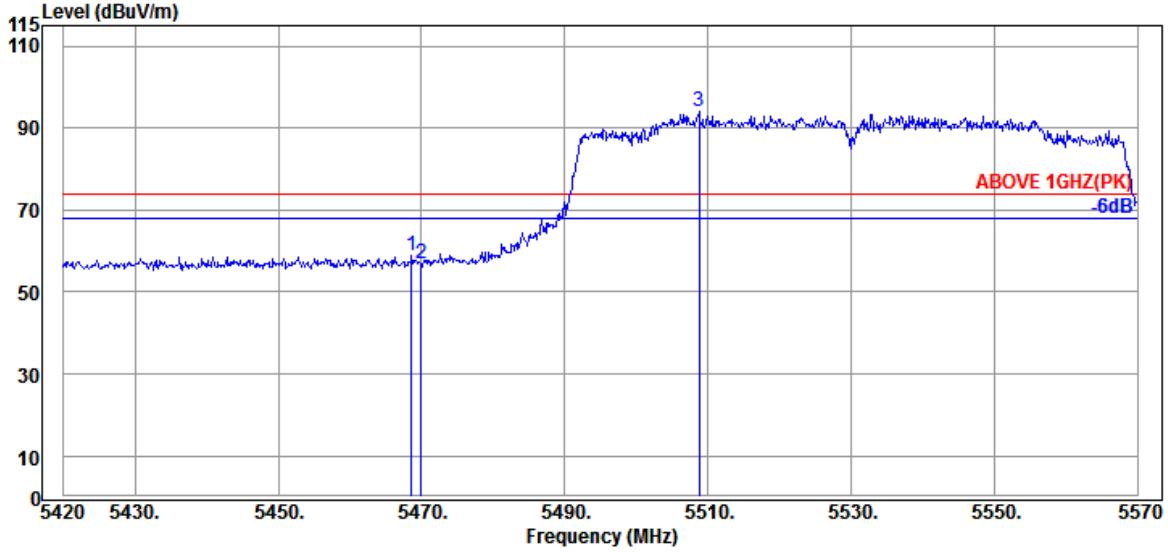

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	33.97	9.20	31.63	47.23	58.77	74.00	15.23	Peak
5469.950	33.97	9.20	31.63	45.27	56.81	74.00	17.19	Peak
@ 5508.800	34.10	9.23	31.64	82.24	93.93	---	---	Peak

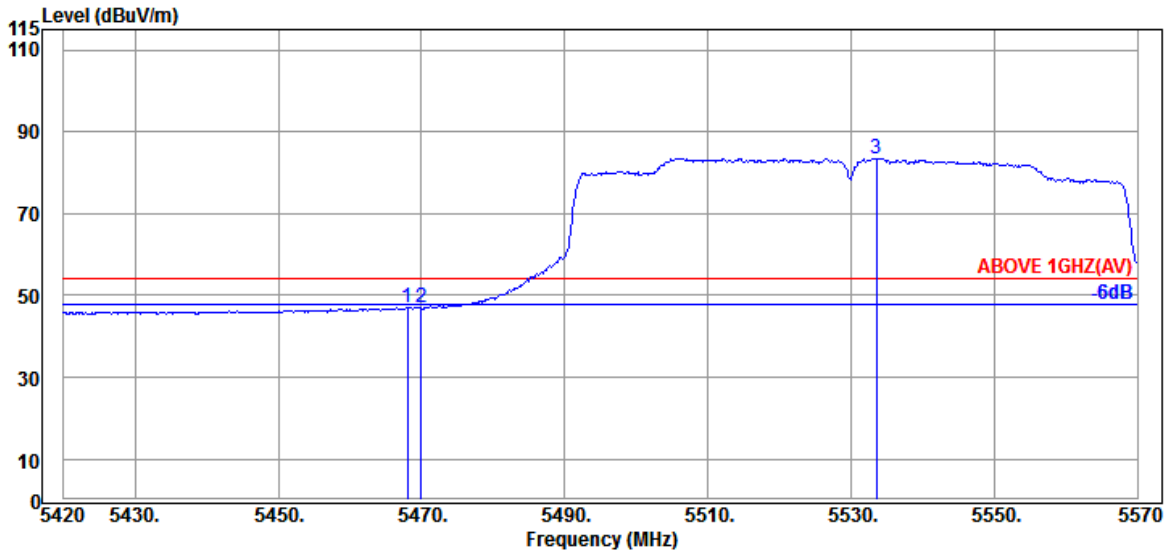


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	33.97	9.20	31.63	35.55	47.09	54.00	6.91	Average
5469.950	33.97	9.20	31.63	35.34	46.88	54.00	7.12	Average
@ 5533.550	34.17	9.26	31.65	71.77	83.55	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

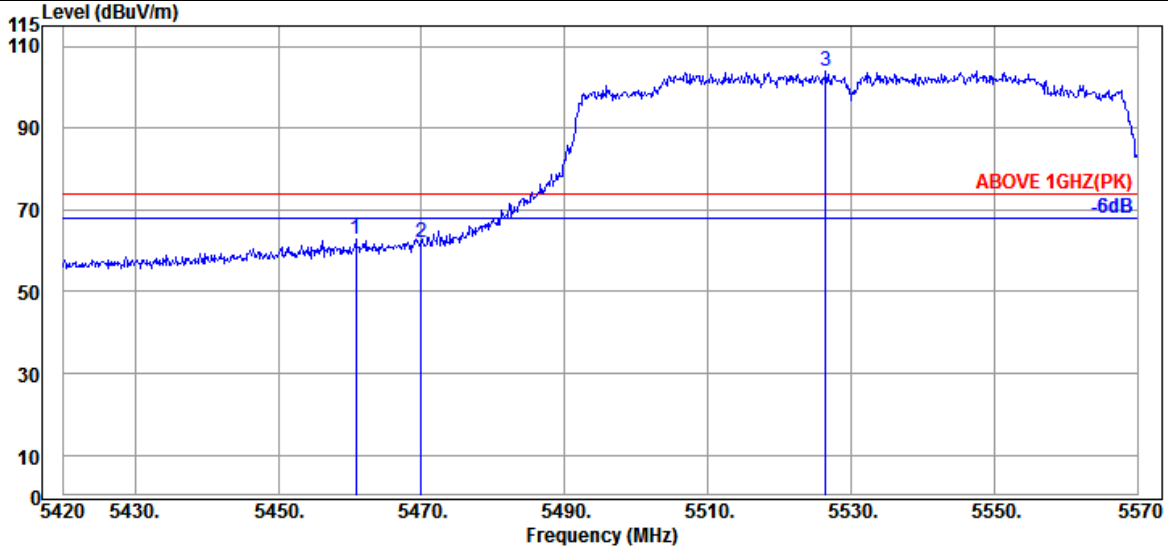

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.800	33.90	9.18	31.63	51.27	62.72	74.00	11.28	Peak
5469.950	33.97	9.20	31.63	50.57	62.11	74.00	11.89	Peak
@ 5526.500	34.13	9.24	31.65	92.10	103.82	---	---	Peak

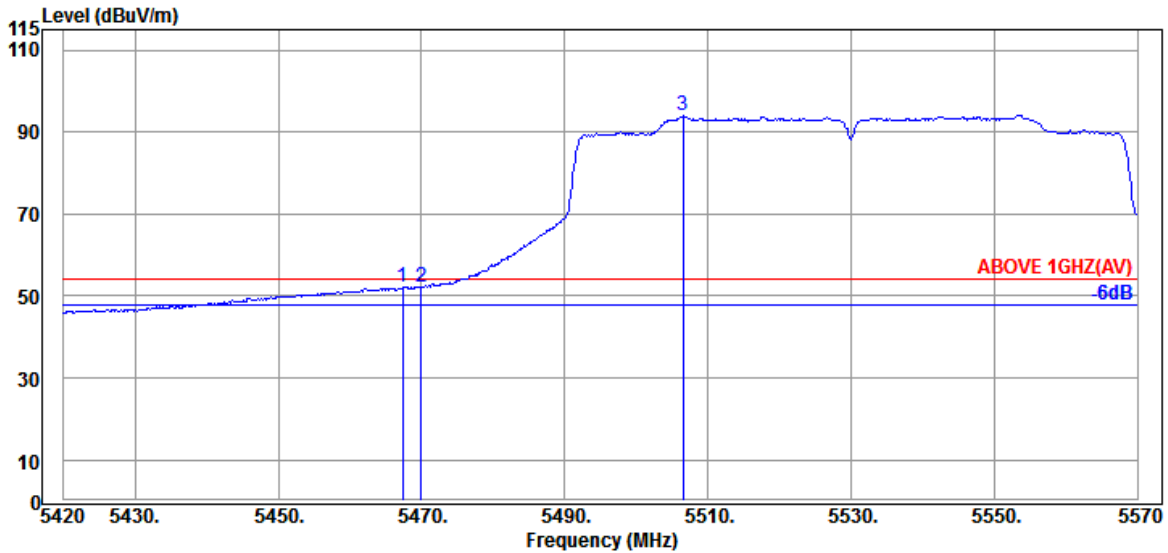


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	33.97	9.20	31.63	40.61	52.15	54.00	1.85	Average
5469.950	33.97	9.20	31.63	40.56	52.10	54.00	1.90	Average
@ 5506.550	34.10	9.23	31.64	82.37	94.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

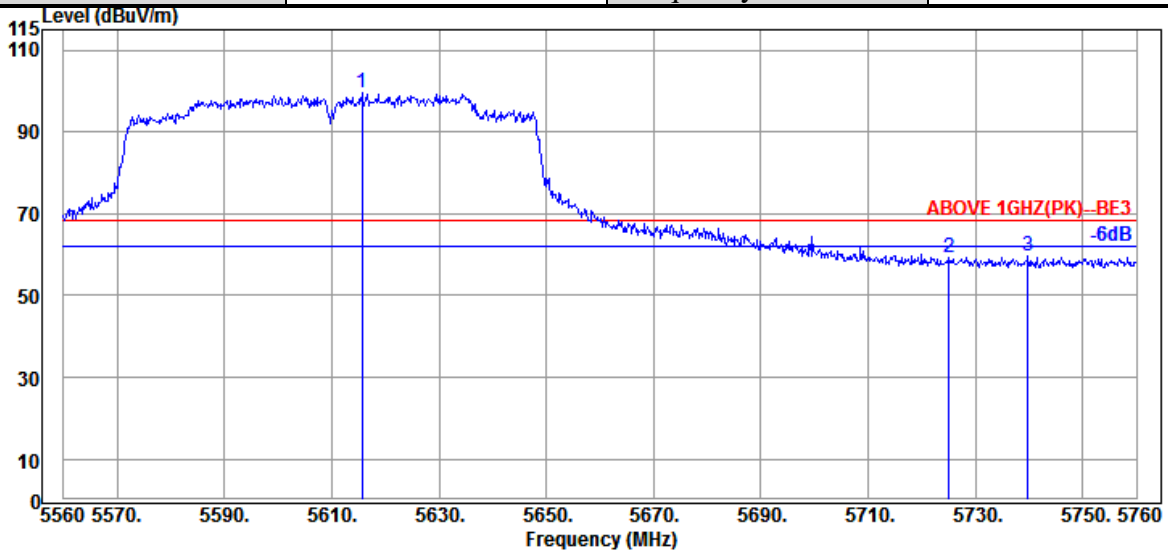

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5615.600	34.23	9.33	31.69	87.69	99.56	---	---	Peak
5725.000	34.50	9.42	31.74	47.08	59.26	68.20	8.94	Peak
5739.800	34.60	9.43	31.75	47.48	59.76	68.20	8.44	Peak

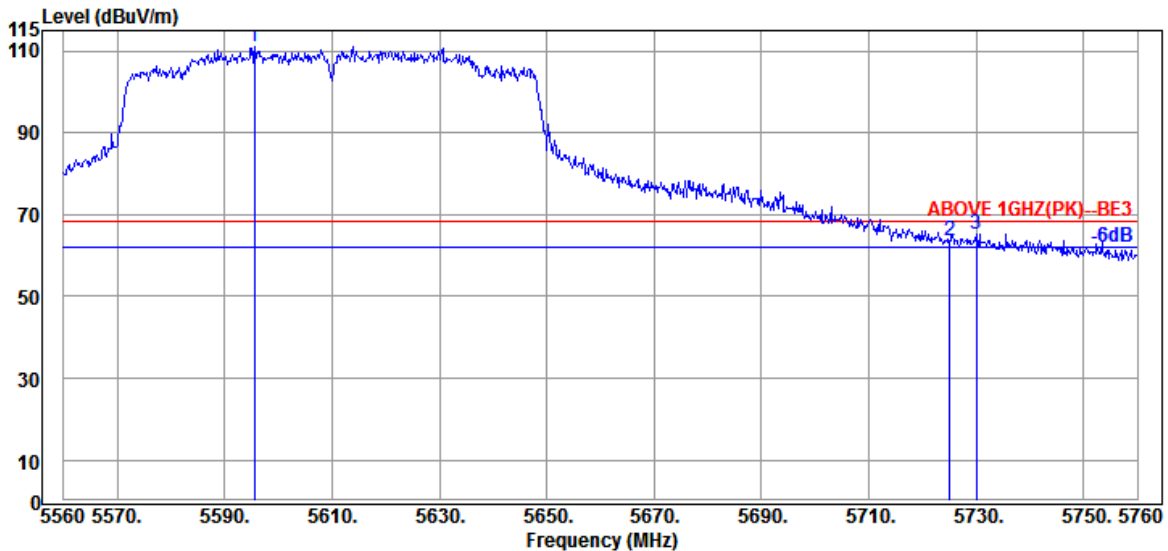


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.600	34.20	9.30	31.67	99.28	111.11	---	---	Peak
5725.000	34.50	9.42	31.74	51.60	63.78	68.20	4.42	Peak
5730.000	34.50	9.42	31.75	53.12	65.29	68.20	2.91	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

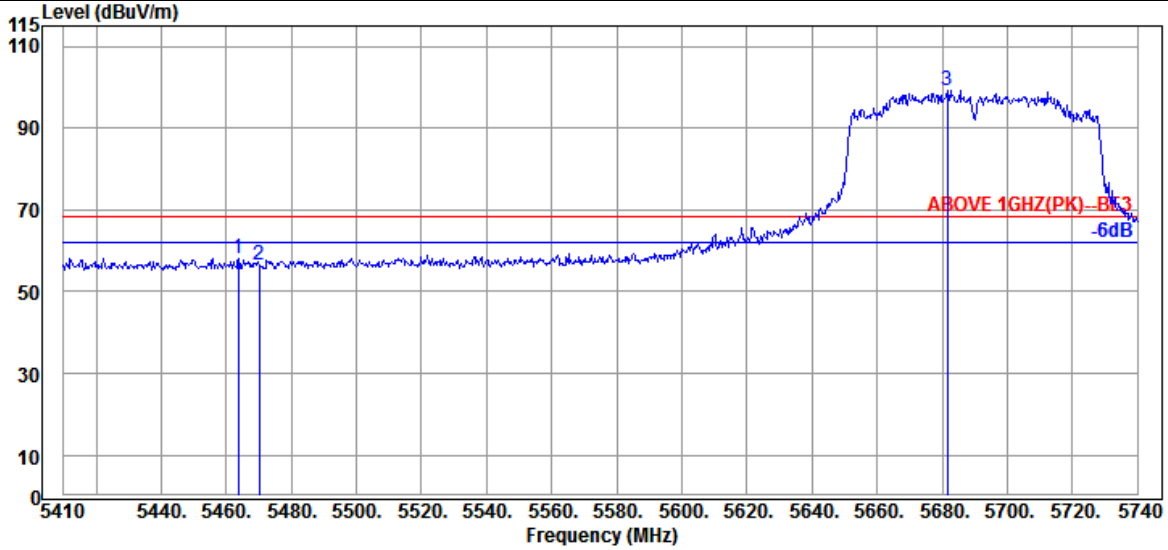

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.790	33.97	9.20	31.63	46.63	58.17	68.20	10.03	Peak
5470.060	33.97	9.20	31.63	45.11	56.65	68.20	11.55	Peak
@ 5681.590	34.30	9.37	31.72	87.16	99.11	---	---	Peak

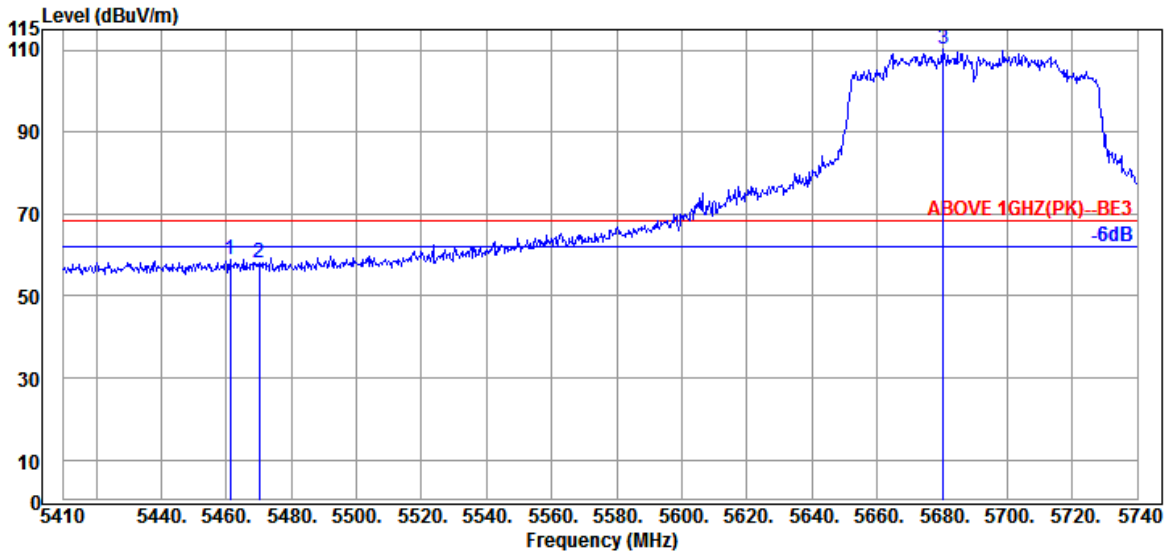


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.150	33.90	9.18	31.63	47.60	59.05	68.20	9.15	Peak
5470.060	33.97	9.20	31.63	46.49	58.03	68.20	10.17	Peak
@ 5680.270	34.30	9.37	31.72	98.14	110.09	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

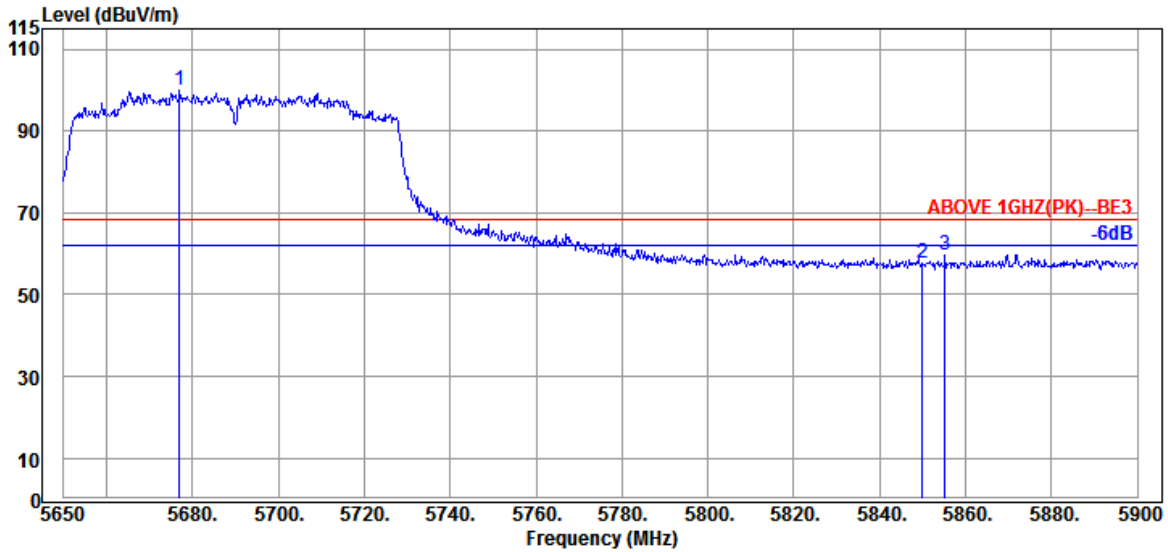

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.000	34.30	9.37	31.72	88.13	100.08	---	---	Peak
5850.000	35.00	9.52	31.80	44.82	57.54	68.20	10.66	Peak
5855.250	35.00	9.53	31.80	47.13	59.86	68.20	8.34	Peak

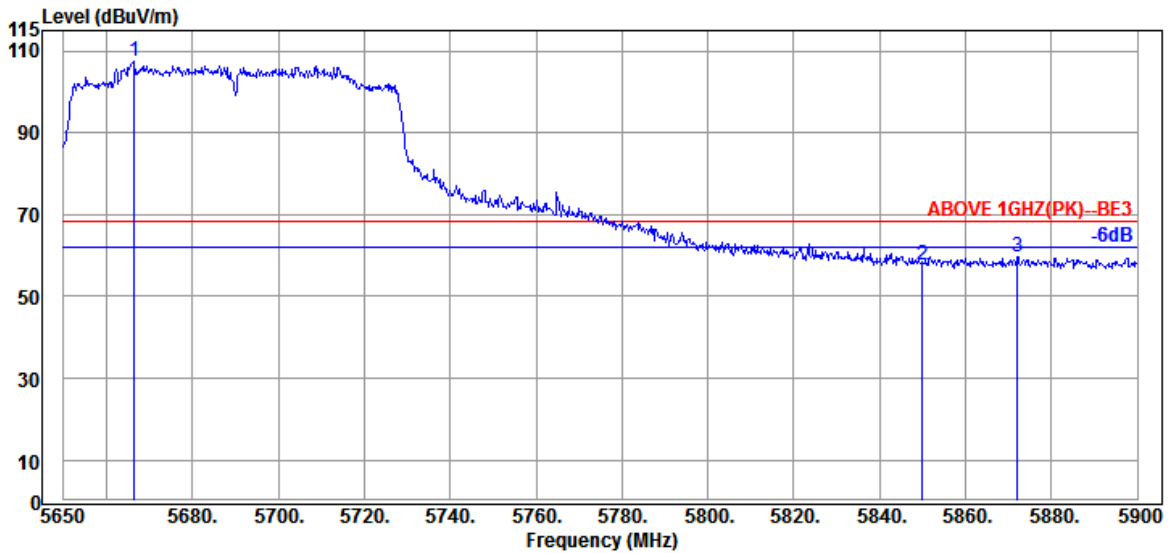


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5666.500	34.30	9.36	31.71	95.44	107.39	---	---	Peak
5850.000	35.00	9.52	31.80	45.16	57.88	68.20	10.32	Peak
5872.000	35.03	9.55	31.81	47.04	59.81	68.20	8.39	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

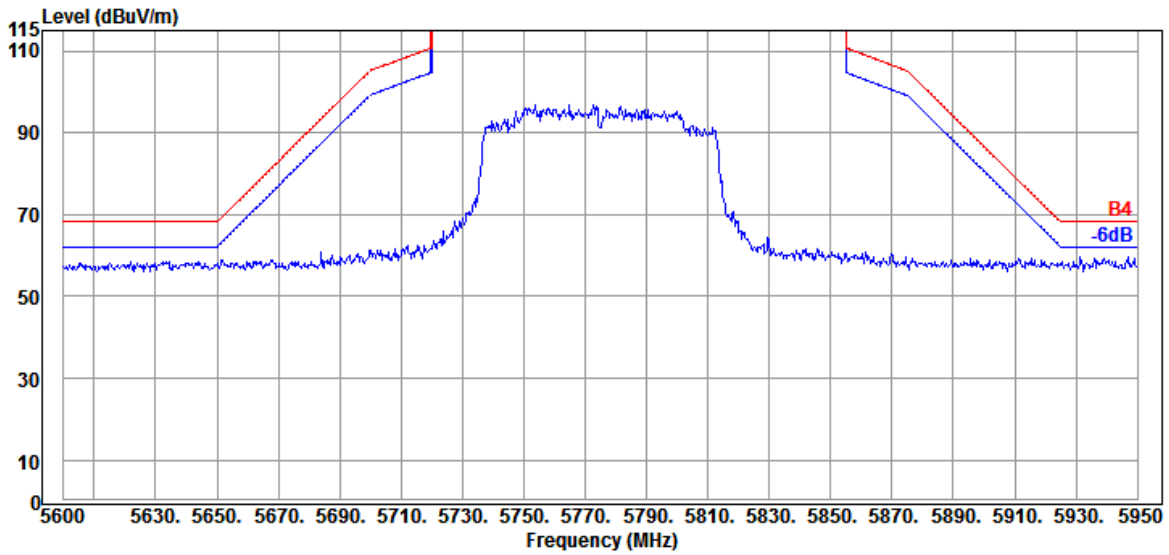

Antenna at Vertical Polarization

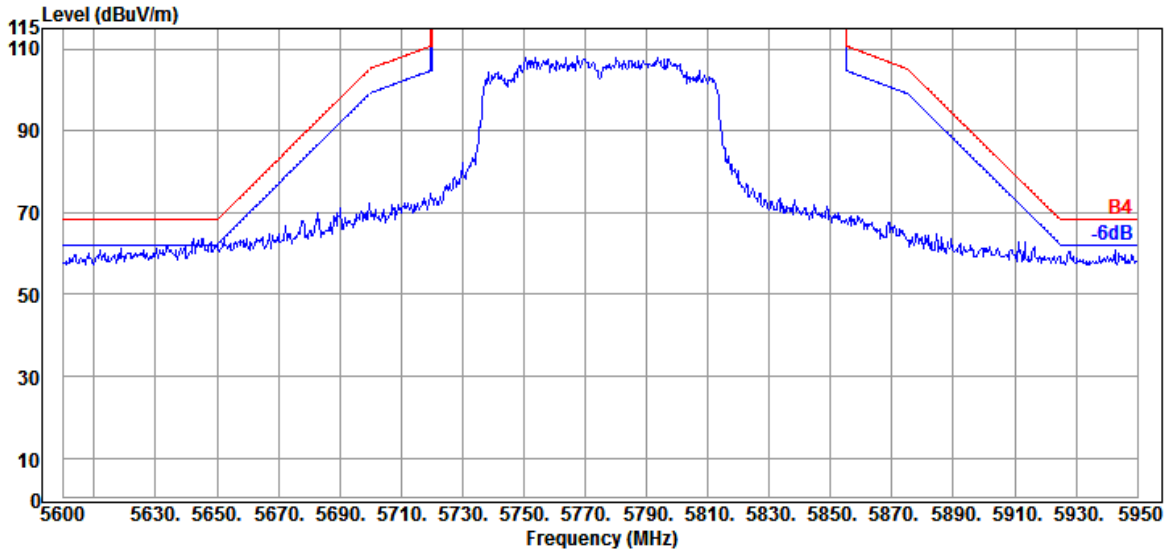


Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

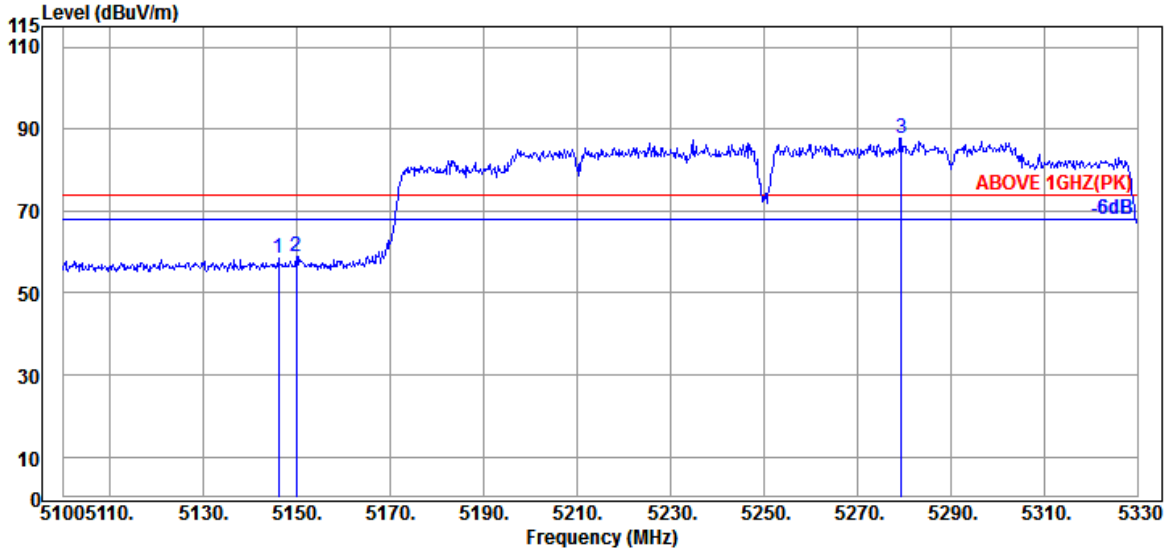

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.10	8.92	31.63	48.10	58.49	74.00	15.51	Peak
5149.910	33.10	8.92	31.63	48.64	59.03	74.00	14.97	Peak
@ 5279.400	33.17	9.04	31.63	77.03	87.61	---	---	Peak

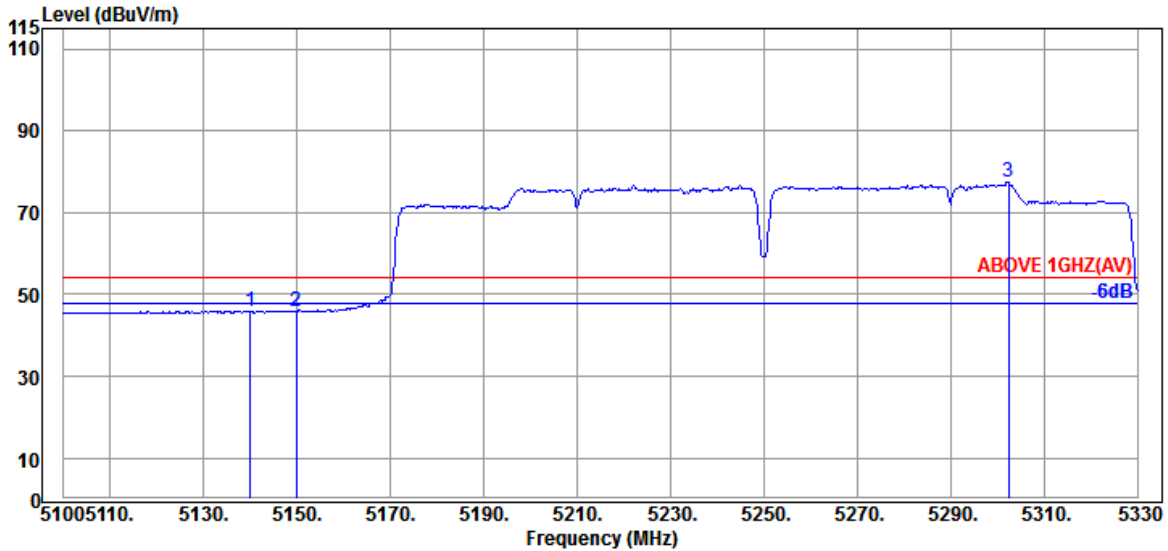


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.020	33.07	8.92	31.63	35.64	46.00	54.00	8.00	Average
5149.910	33.10	8.92	31.63	35.36	45.75	54.00	8.25	Average
@ 5302.400	33.20	9.05	31.63	66.89	77.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

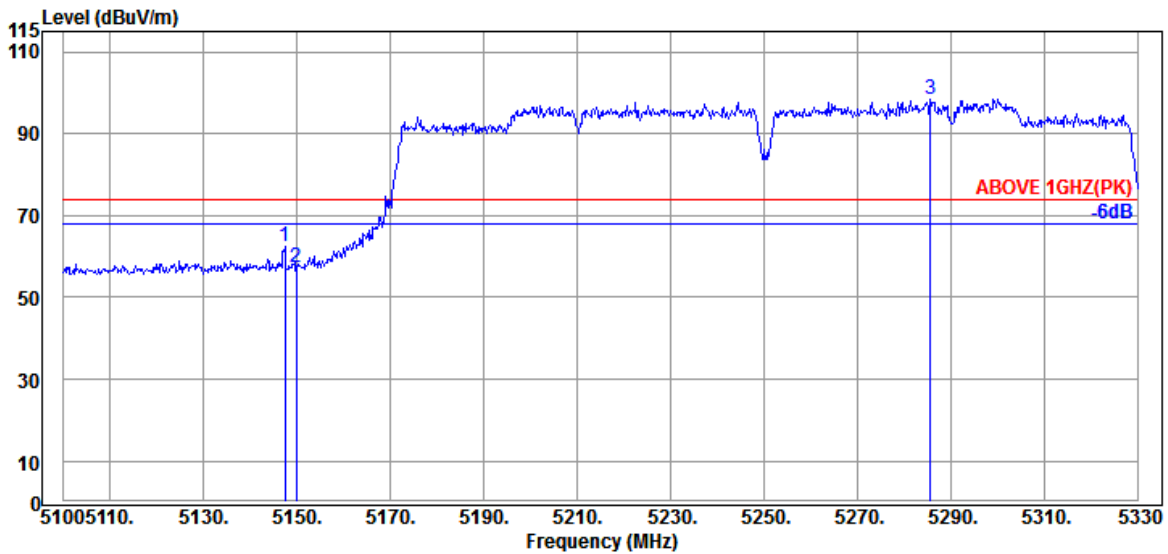

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.380	33.10	8.92	31.63	51.91	62.30	74.00	11.70	Peak
5149.910	33.10	8.92	31.63	46.98	57.37	74.00	16.63	Peak
@ 5285.610	33.17	9.04	31.63	87.74	98.32	---	---	Peak

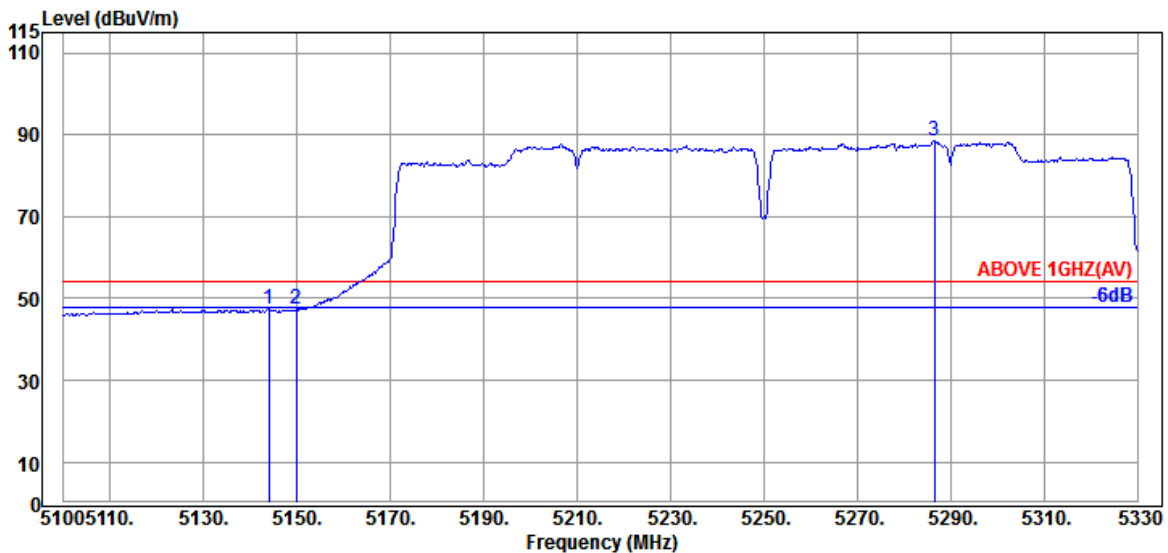


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.930	33.10	8.92	31.63	37.14	47.53	54.00	6.47	Average
5149.910	33.10	8.92	31.63	36.95	47.34	54.00	6.66	Average
@ 5286.530	33.17	9.04	31.63	78.07	88.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

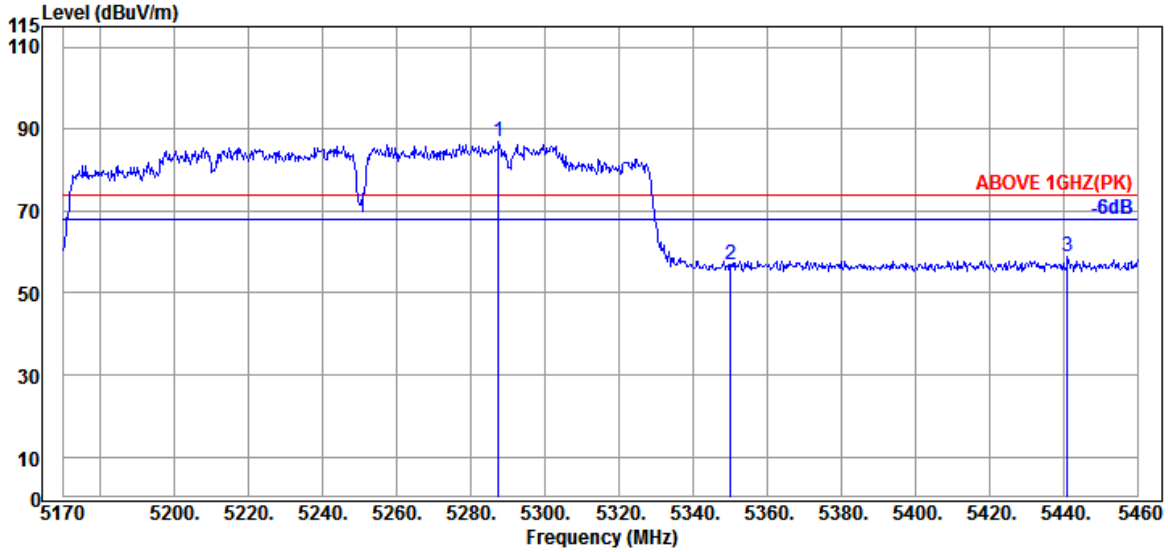

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.450	33.17	9.04	31.63	76.18	86.76	---	---	Peak
5350.090	33.50	9.10	31.63	46.08	57.05	74.00	16.95	Peak
5441.150	33.85	9.17	31.63	47.44	58.83	74.00	15.17	Peak

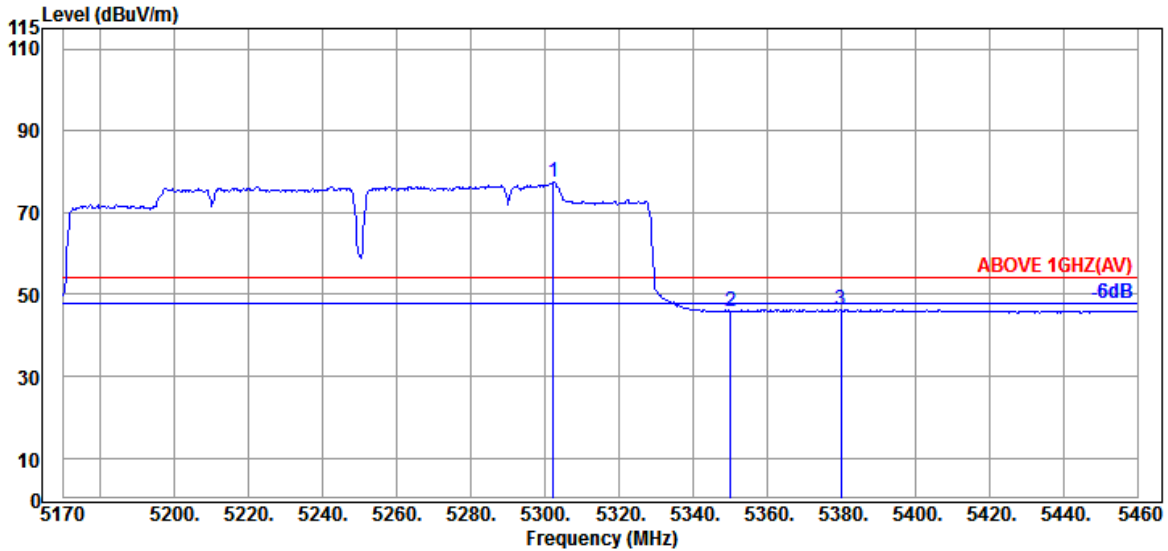


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	33.20	9.05	31.63	66.79	77.41	---	---	Average
5350.090	33.50	9.10	31.63	34.89	45.86	54.00	8.14	Average
5379.960	33.63	9.13	31.63	35.16	46.29	54.00	7.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

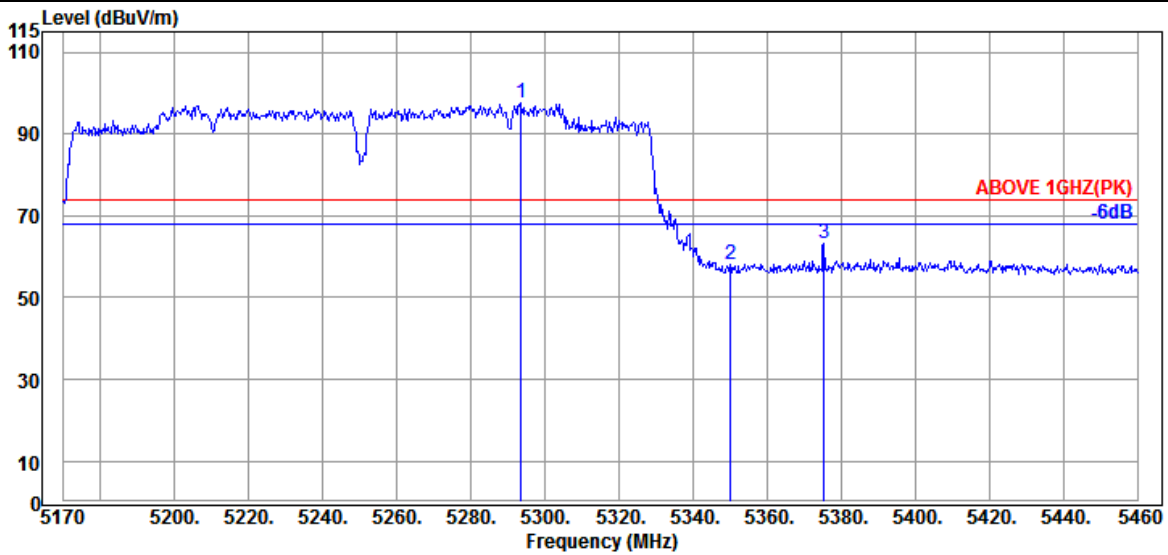

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.540	33.20	9.05	31.63	87.15	97.77	---	---	Peak
5350.090	33.50	9.10	31.63	47.13	58.10	74.00	15.90	Peak
5375.320	33.63	9.11	31.63	51.97	63.08	74.00	10.92	Peak

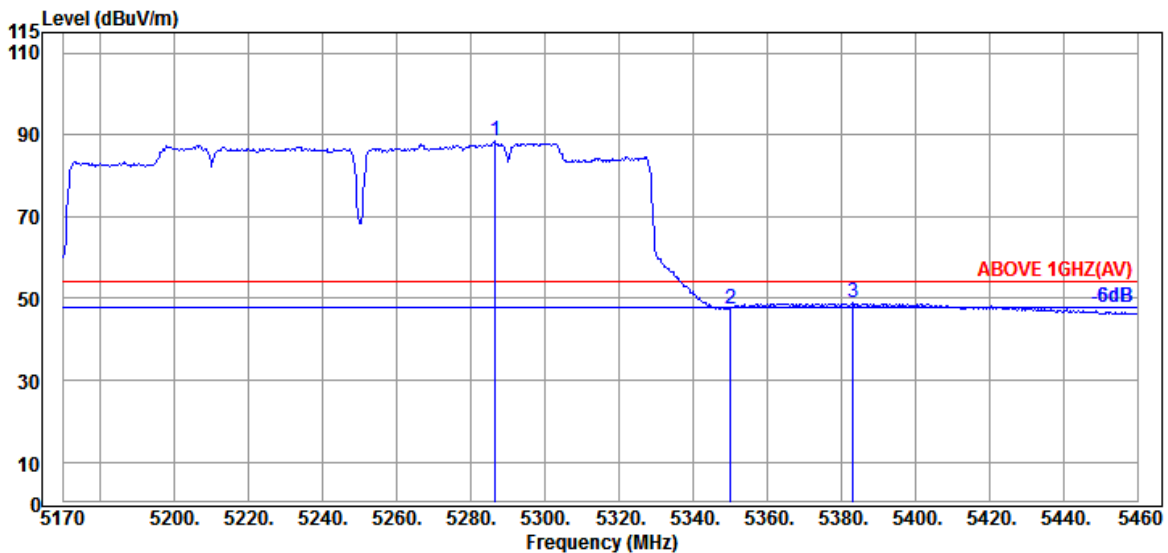


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.580	33.17	9.04	31.63	77.94	88.52	---	---	Average
5350.090	33.50	9.10	31.63	36.64	47.61	54.00	6.39	Average
5383.150	33.63	9.13	31.63	37.69	48.82	54.00	5.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

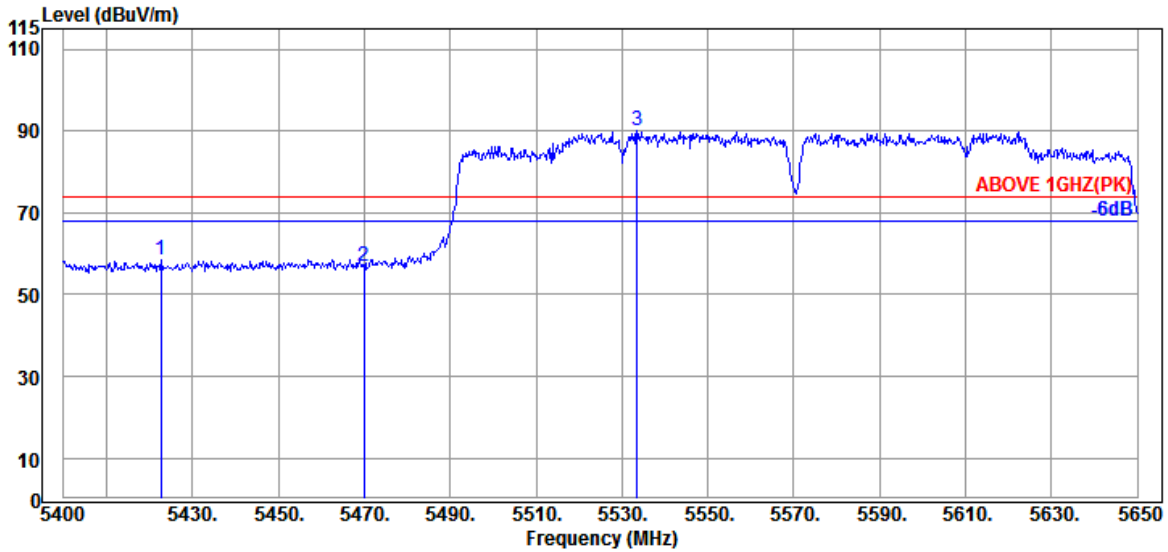

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.750	33.80	9.15	31.63	47.28	58.60	74.00	15.40	Peak
5470.000	33.97	9.20	31.63	45.55	57.09	74.00	16.91	Peak
@ 5533.500	34.17	9.26	31.65	78.19	89.97	---	---	Peak

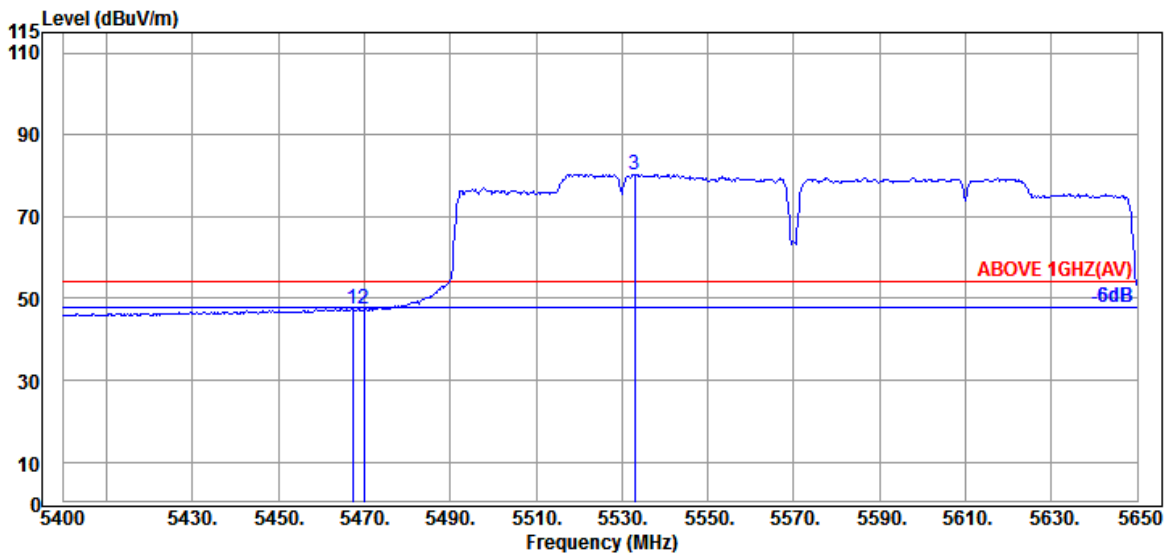


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	33.97	9.20	31.63	35.81	47.35	54.00	6.65	Average
5470.000	33.97	9.20	31.63	35.77	47.31	54.00	6.69	Average
@ 5533.000	34.17	9.26	31.65	68.59	80.37	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

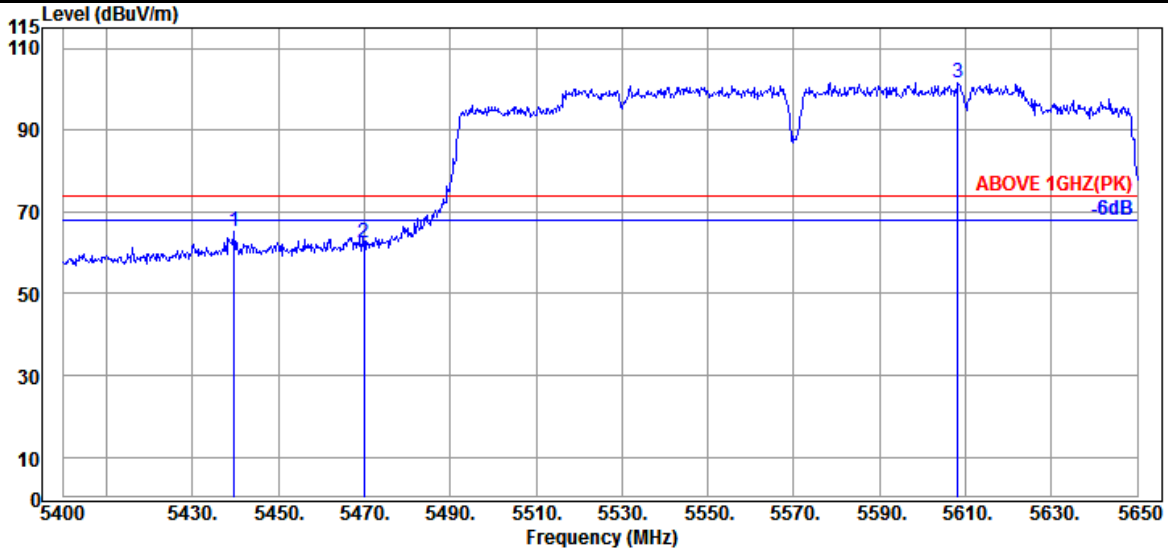

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.750	33.85	9.17	31.63	53.79	65.18	74.00	8.82	Peak
5470.000	33.97	9.20	31.63	50.81	62.35	74.00	11.65	Peak
@ 5608.250	34.23	9.31	31.68	89.80	101.66	---	---	Peak

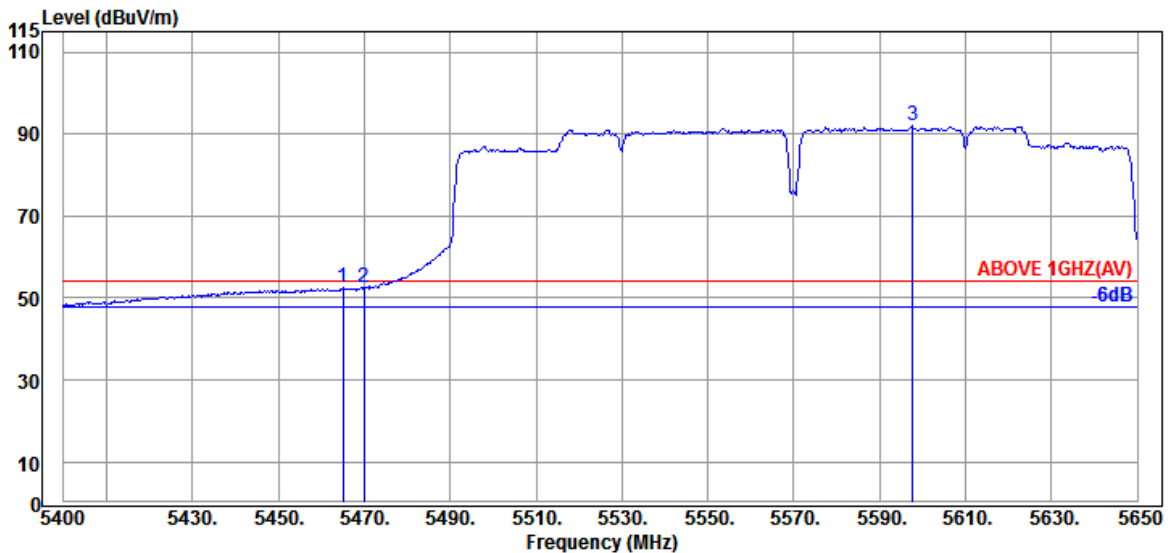


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	33.97	9.20	31.63	40.92	52.46	54.00	1.54	Average
5470.000	33.97	9.20	31.63	40.90	52.44	54.00	1.56	Average
@ 5597.750	34.20	9.30	31.68	80.23	92.05	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

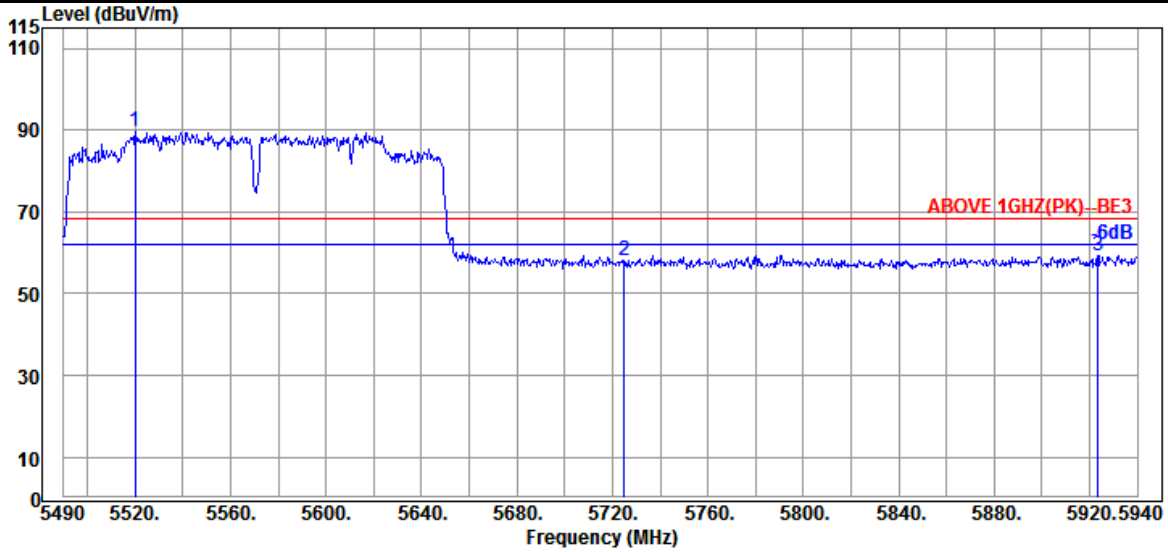

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5520.150	34.13	9.24	31.64	77.91	89.64	---	---	Peak
5724.900	34.50	9.42	31.74	45.91	58.09	68.20	10.11	Peak
5923.350	35.17	9.59	31.83	46.51	59.44	68.20	8.76	Peak

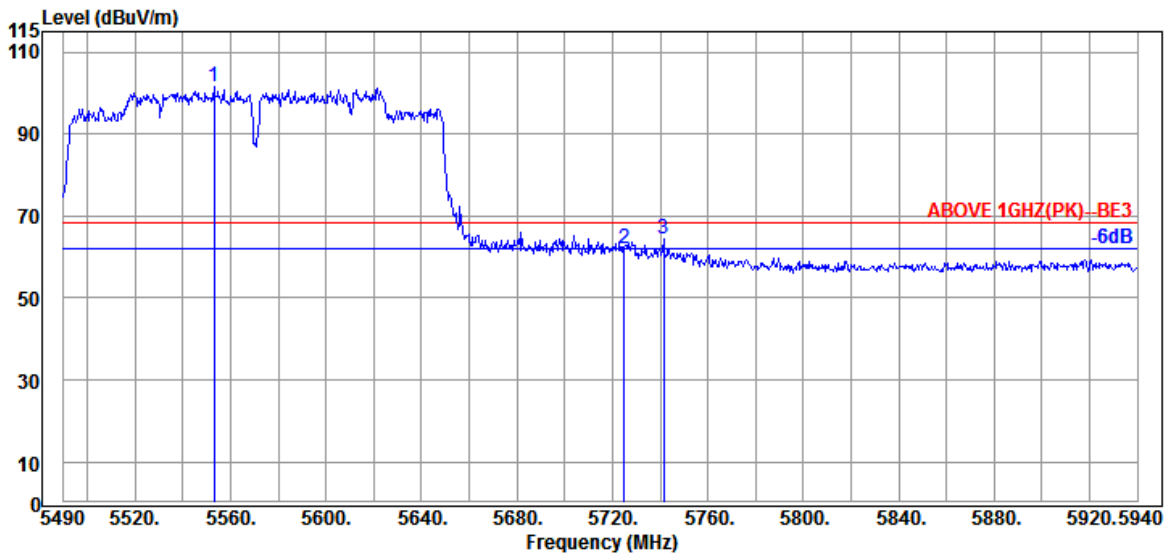


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5553.000	34.20	9.27	31.66	89.64	101.45	---	---	Peak
5724.900	34.50	9.42	31.74	49.89	62.07	68.20	6.13	Peak
5741.550	34.60	9.43	31.75	52.11	64.39	68.20	3.81	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

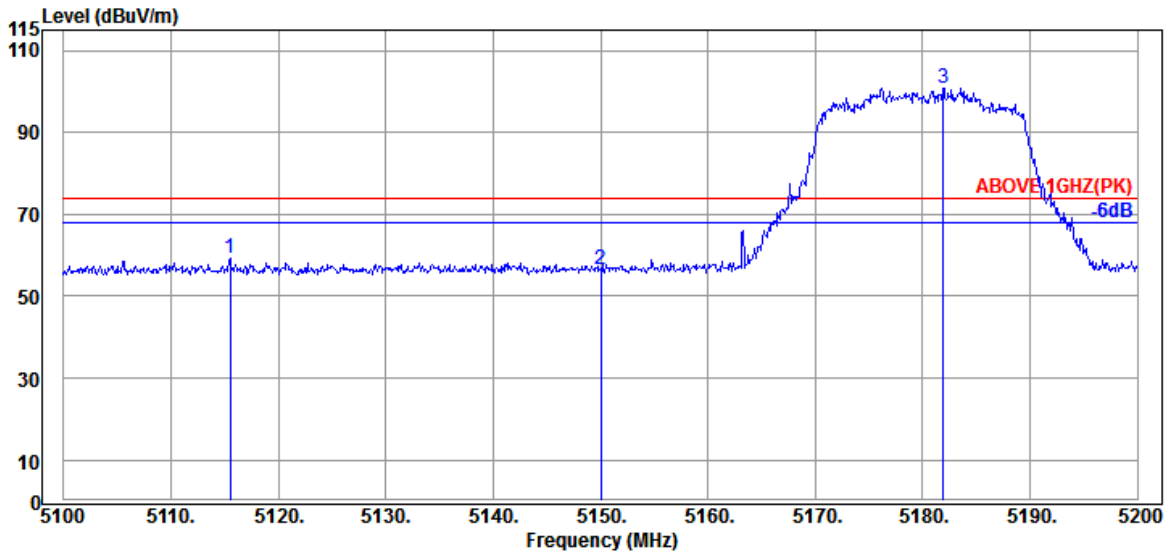

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.500	33.03	8.89	31.63	49.08	59.37	74.00	14.63	Peak
5150.000	33.10	8.92	31.63	46.24	56.63	74.00	17.37	Peak
@ 5181.900	33.17	8.95	31.63	90.34	100.83	---	---	Peak

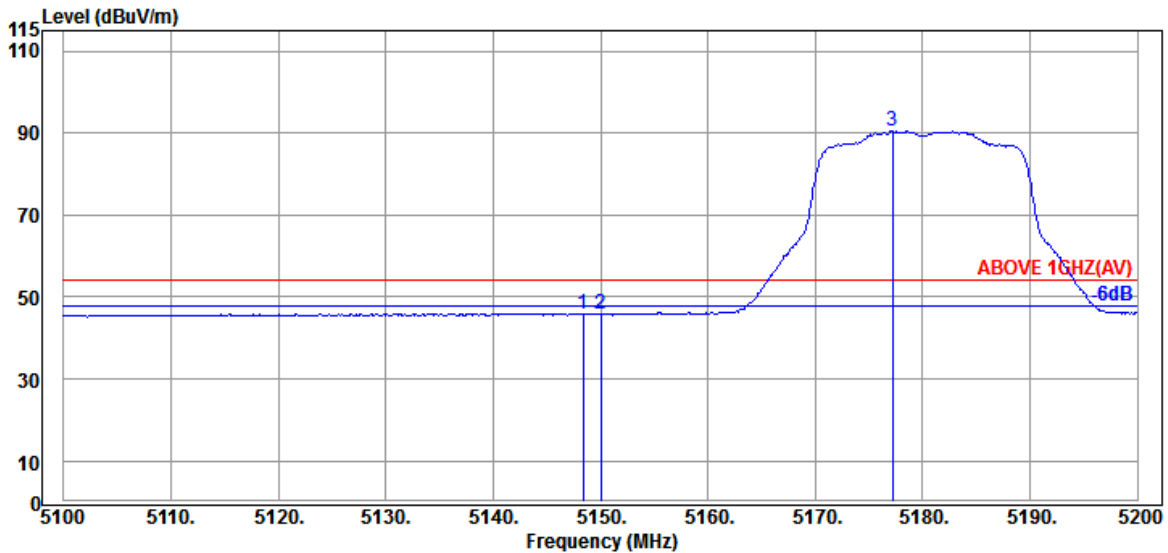


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.10	8.92	31.63	35.65	46.04	54.00	7.96	Average
5150.000	33.10	8.92	31.63	35.35	45.74	54.00	8.26	Average
@ 5177.200	33.17	8.95	31.63	80.06	90.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

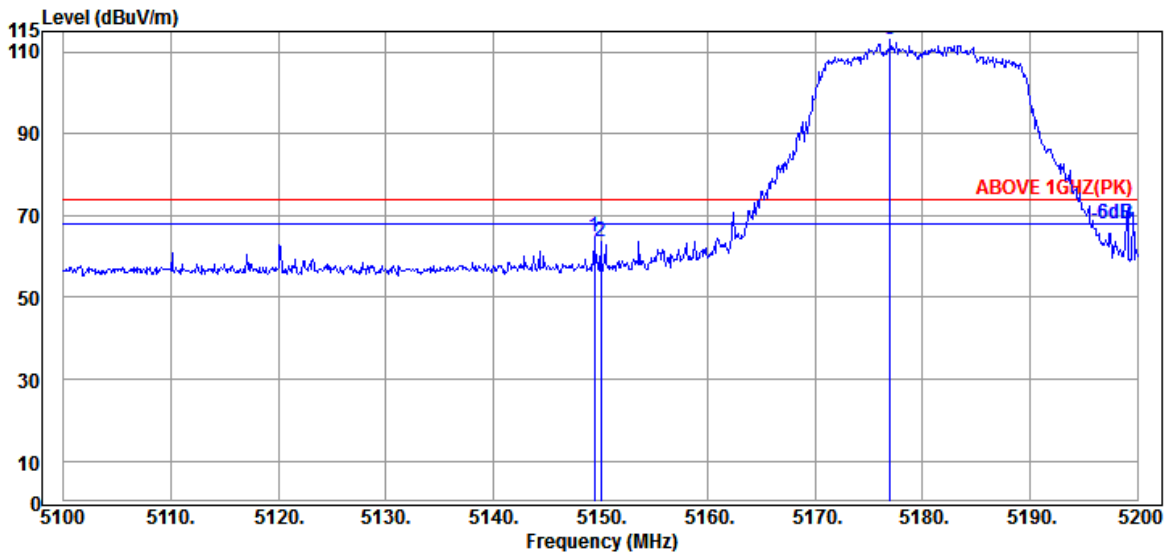

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.10	8.92	31.63	54.52	64.91	74.00	9.09	Peak
5150.000	33.10	8.92	31.63	53.14	63.53	74.00	10.47	Peak
@ 5177.000	33.17	8.95	31.63	102.52	113.01	---	---	Peak

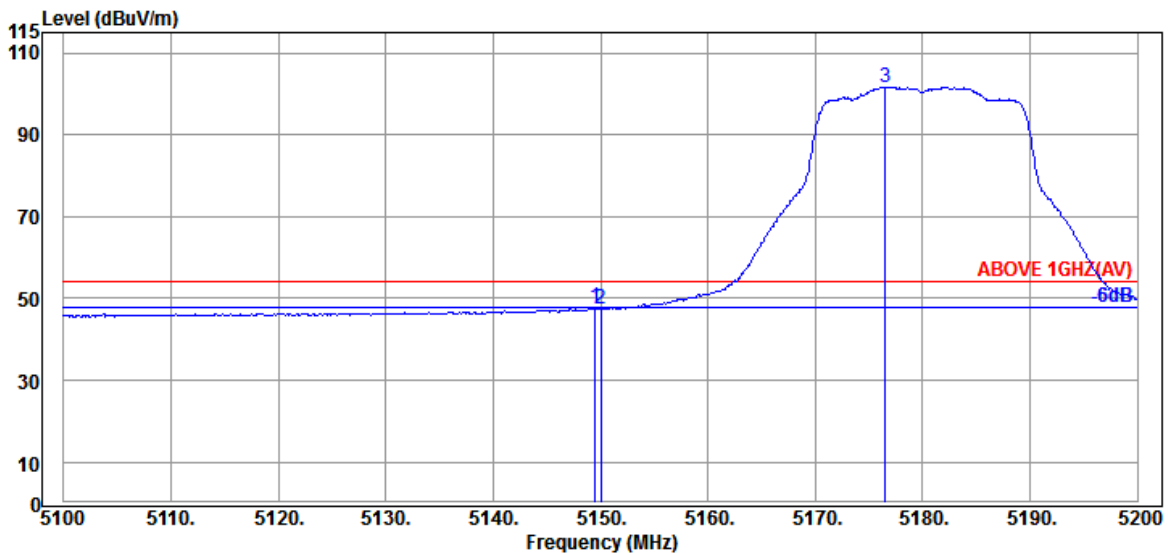


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.10	8.92	31.63	37.24	47.63	54.00	6.37	Average
5150.000	33.10	8.92	31.63	36.98	47.37	54.00	6.63	Average
@ 5176.500	33.17	8.95	31.63	91.12	101.61	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

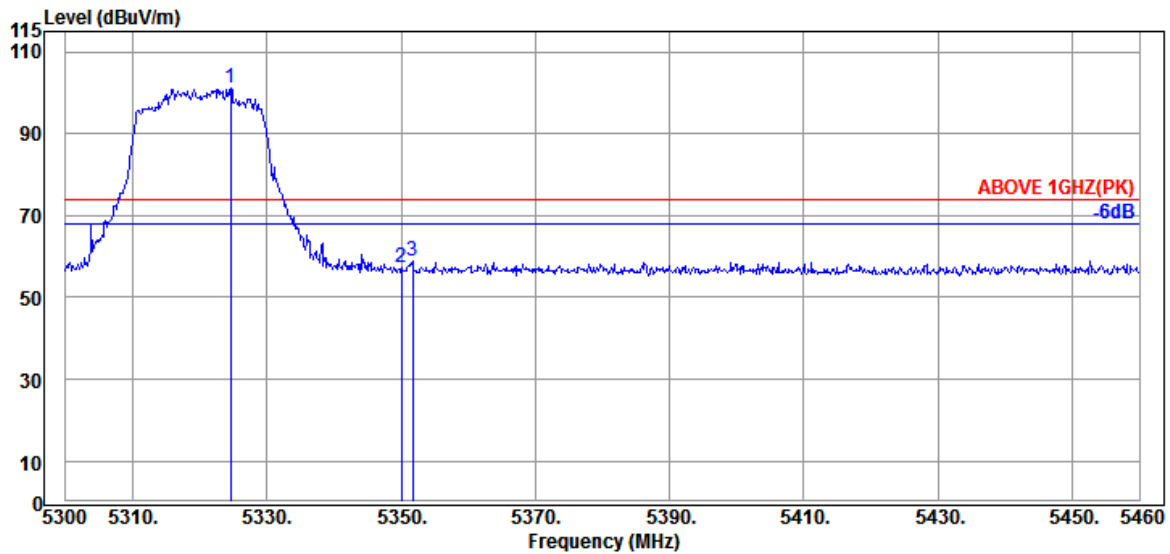

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.640	33.40	9.07	31.63	90.19	101.03	---	---	Peak
5350.080	33.50	9.10	31.63	46.24	57.21	74.00	16.79	Peak
5351.680	33.50	9.10	31.63	48.07	59.04	74.00	14.96	Peak

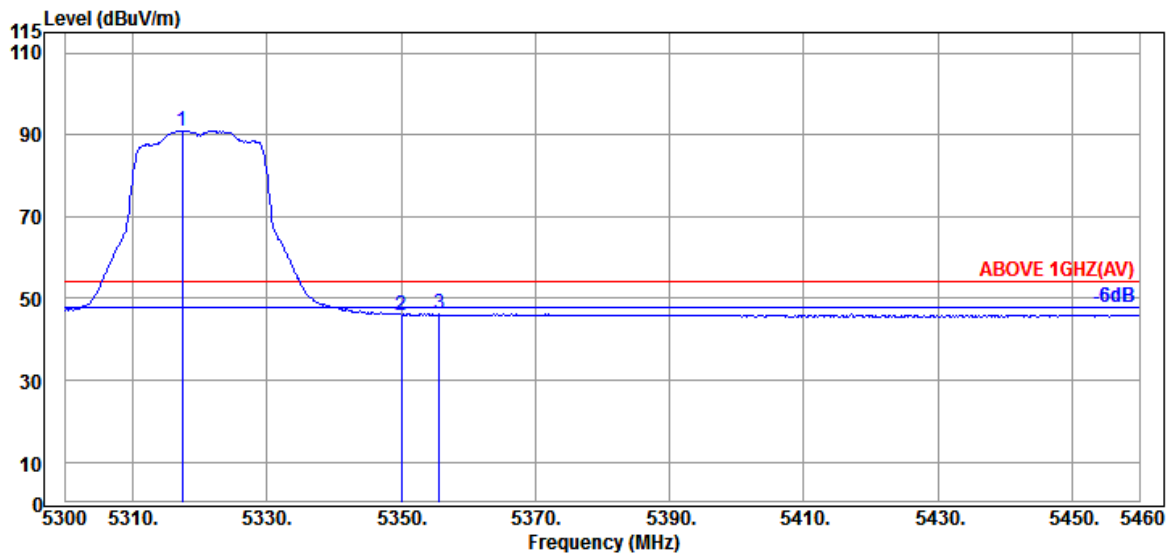


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	33.30	9.07	31.63	80.27	91.01	---	---	Average
5350.080	33.50	9.10	31.63	35.07	46.04	54.00	7.96	Average
5355.680	33.57	9.10	31.63	35.19	46.23	54.00	7.77	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

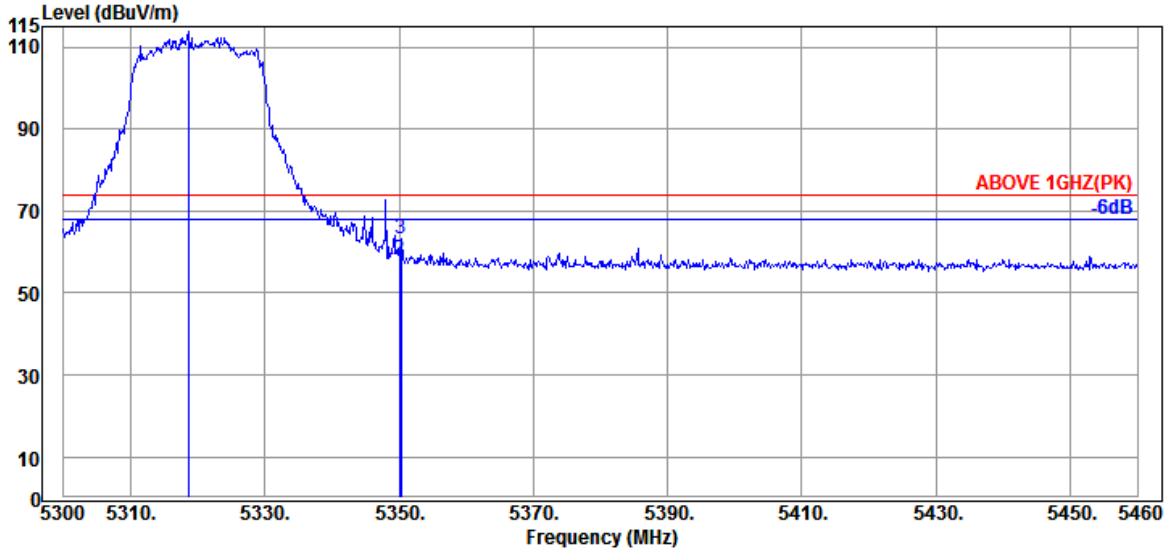

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.560	33.30	9.07	31.63	102.98	113.72	---	---	Peak
5350.080	33.50	9.10	31.63	47.01	57.98	74.00	16.02	Peak
5350.240	33.50	9.10	31.63	52.22	63.19	74.00	10.81	Peak

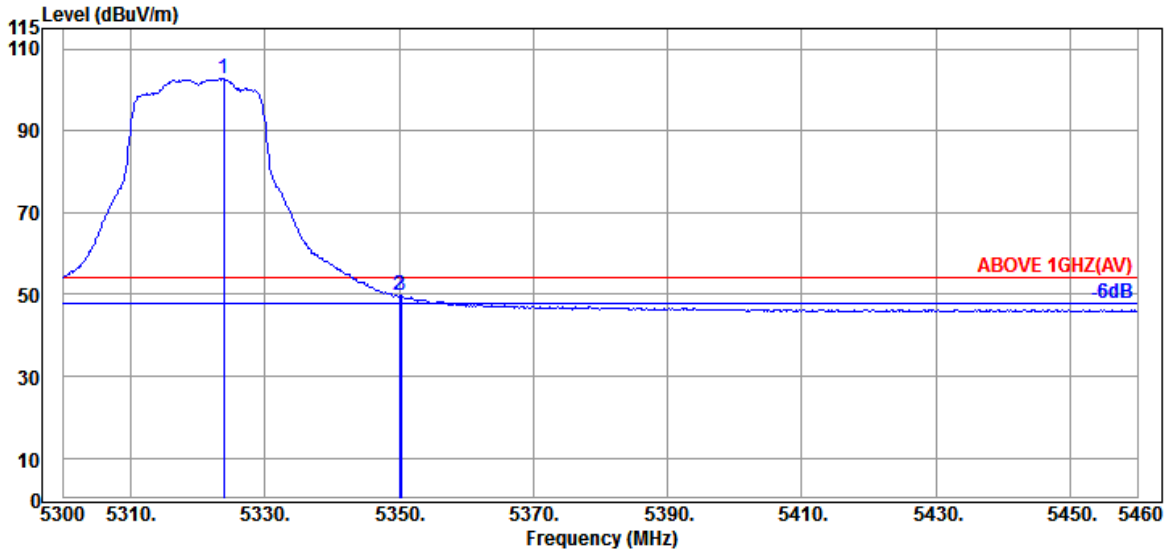


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.840	33.40	9.07	31.63	91.88	102.72	---	---	Average
5350.080	33.50	9.10	31.63	38.81	49.78	54.00	4.22	Average
5350.240	33.50	9.10	31.63	38.81	49.78	54.00	4.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

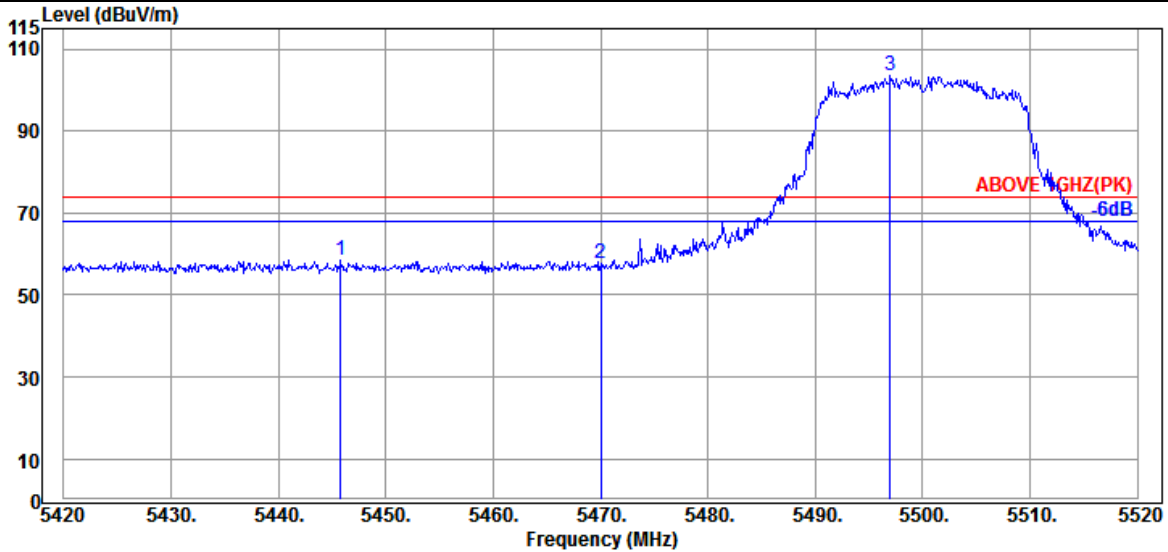

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.800	33.85	9.18	31.63	46.98	58.38	74.00	15.62	Peak
5470.000	33.97	9.20	31.63	46.07	57.61	74.00	16.39	Peak
@ 5497.000	34.10	9.23	31.63	91.89	103.59	---	---	Peak

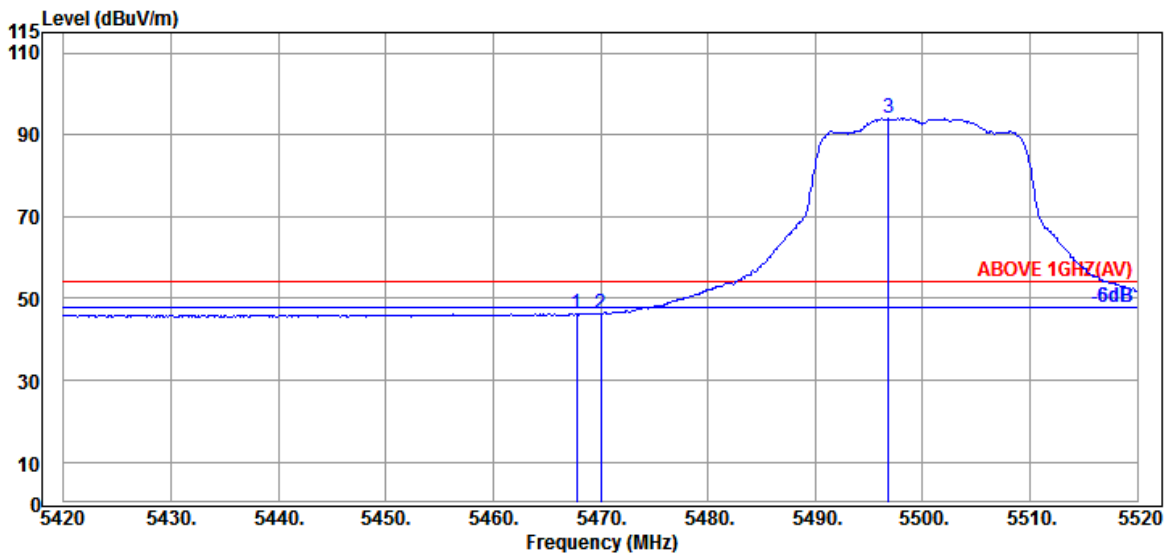


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	33.97	9.20	31.63	34.82	46.36	54.00	7.64	Average
5470.000	33.97	9.20	31.63	34.79	46.33	54.00	7.67	Average
@ 5496.800	34.10	9.23	31.63	82.28	93.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

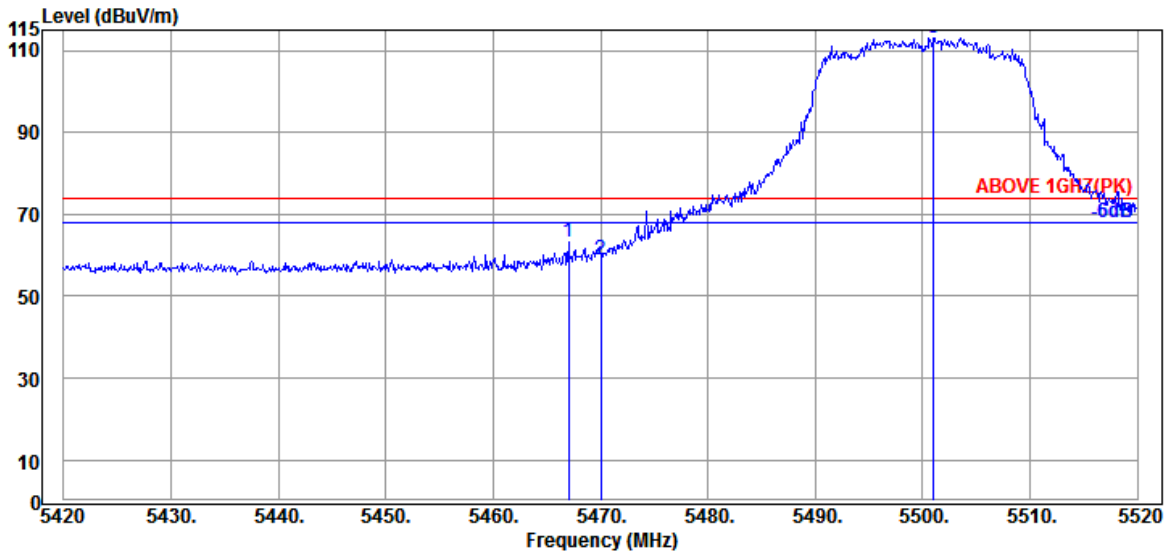

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	33.97	9.20	31.63	51.69	63.23	74.00	10.77	Peak
5470.000	33.97	9.20	31.63	47.29	58.83	74.00	15.17	Peak
@ 5501.000	34.10	9.23	31.63	101.46	113.16	---	---	Peak

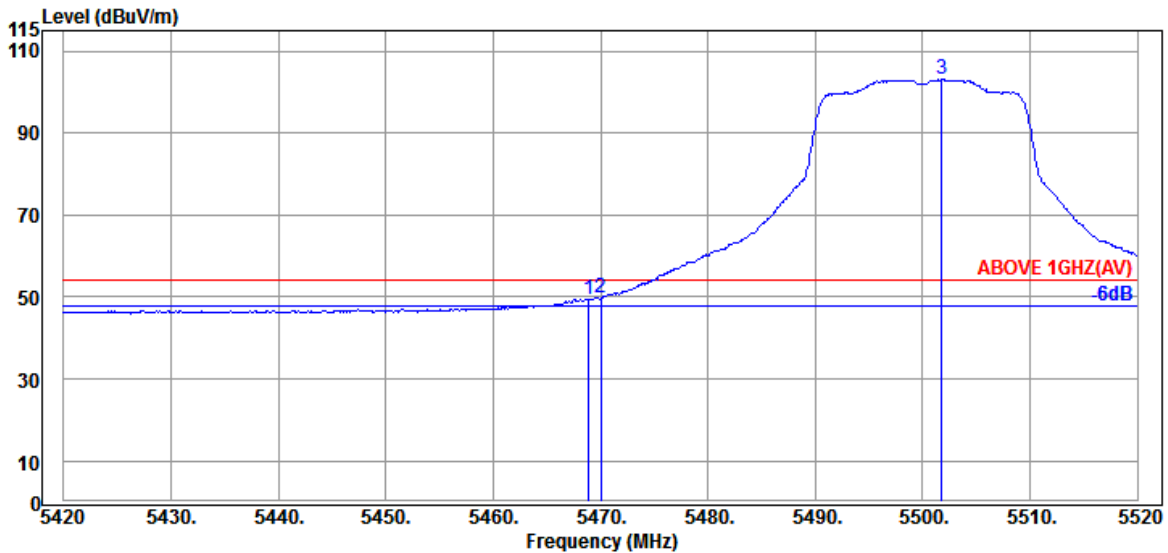


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	37.93	49.47	54.00	4.53	Average
5470.000	33.97	9.20	31.63	38.21	49.75	54.00	4.25	Average
@ 5501.800	34.10	9.23	31.63	91.37	103.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

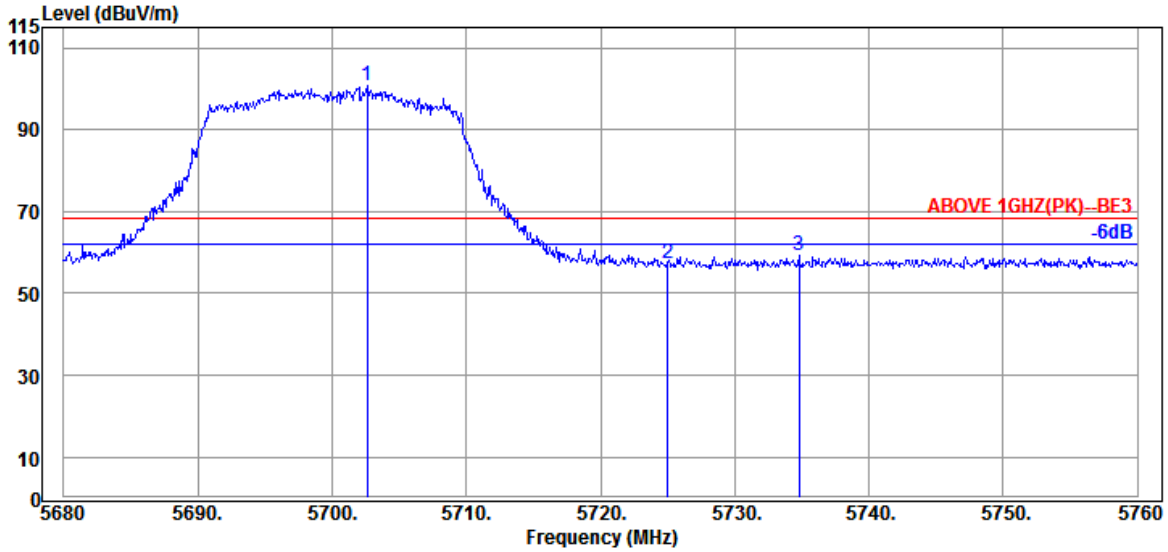

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.640	34.30	9.40	31.73	88.92	100.89	---	---	Peak
5725.040	34.50	9.42	31.74	44.93	57.11	68.20	11.09	Peak
5734.800	34.50	9.43	31.75	47.06	59.24	68.20	8.96	Peak

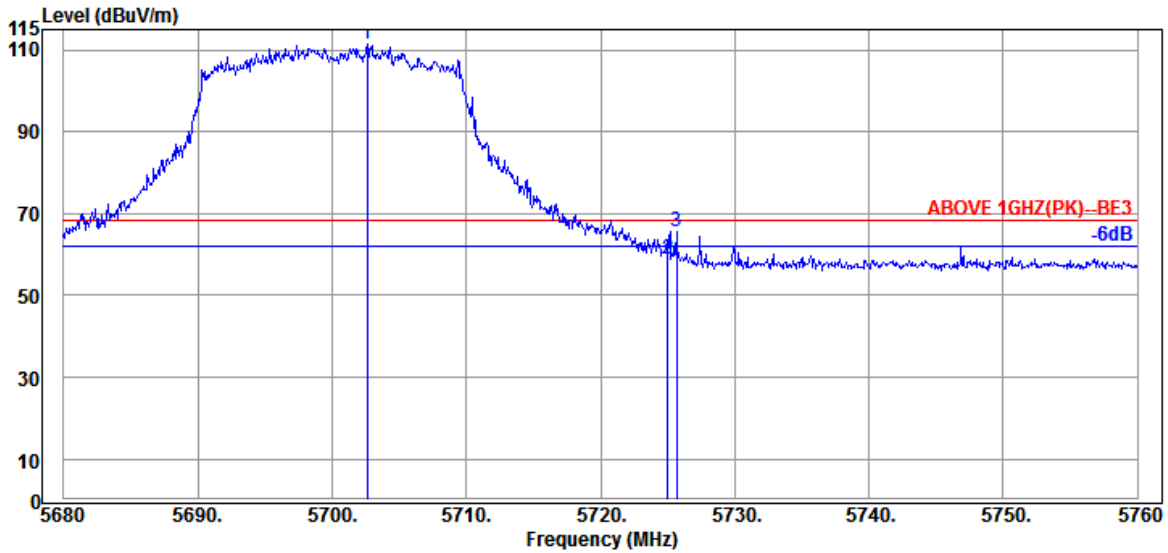


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.640	34.30	9.40	31.73	99.31	111.28	---	---	Peak
5725.040	34.50	9.42	31.74	46.61	58.79	68.20	9.41	Peak
5725.680	34.50	9.42	31.74	53.51	65.69	68.20	2.51	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

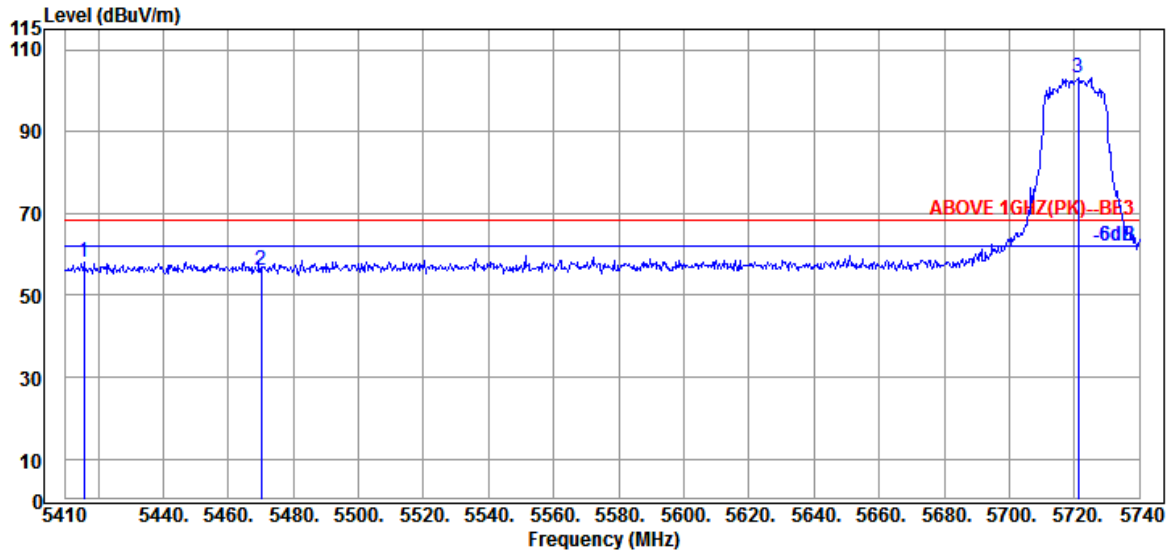

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.610	33.75	9.15	31.63	46.87	58.14	68.20	10.06	Peak
5470.060	33.97	9.20	31.63	44.70	56.24	68.20	11.96	Peak
@ 5721.190	34.40	9.42	31.74	91.14	103.22	---	---	Peak

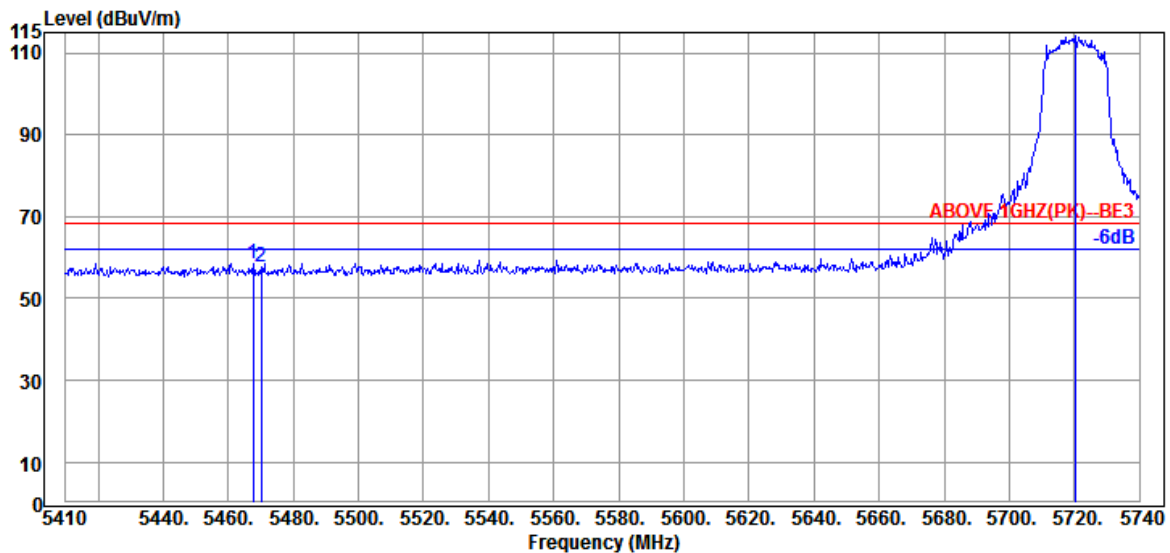


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	33.97	9.20	31.63	47.03	58.57	68.20	9.63	Peak
5470.060	33.97	9.20	31.63	46.17	57.71	68.20	10.49	Peak
@ 5720.200	34.40	9.42	31.74	102.08	114.16	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

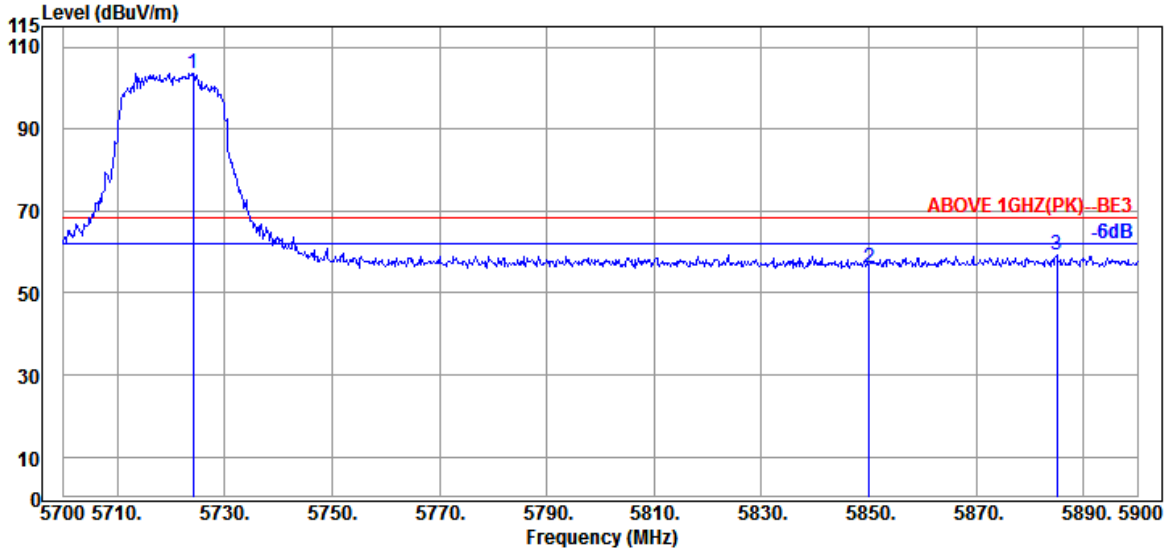

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.200	34.50	9.42	31.74	91.46	103.64	---	---	Peak
5850.000	35.00	9.52	31.80	43.38	56.10	68.20	12.10	Peak
5885.000	35.07	9.55	31.82	46.40	59.20	68.20	9.00	Peak

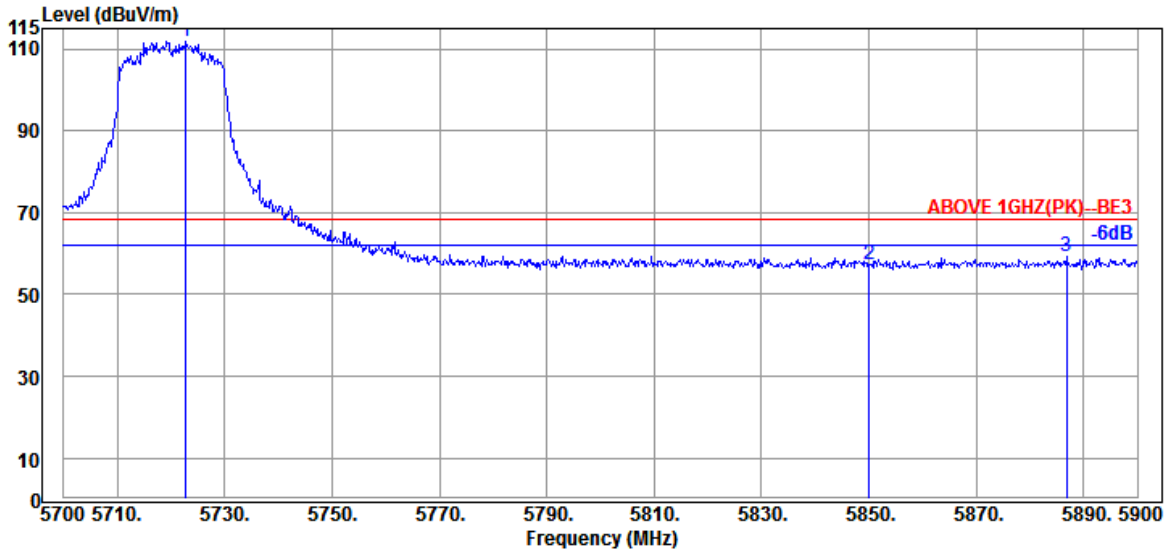


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	34.50	9.42	31.74	99.54	111.72	---	---	Peak
5850.000	35.00	9.52	31.80	44.58	57.30	68.20	10.90	Peak
5886.800	35.07	9.55	31.82	46.64	59.44	68.20	8.76	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

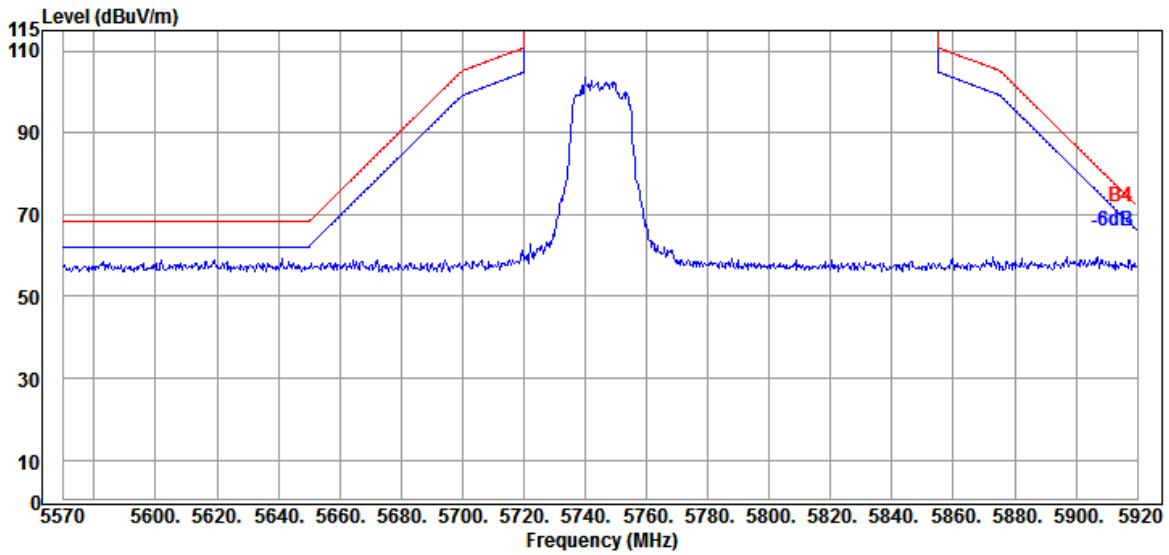


Antenna at Vertical Polarization

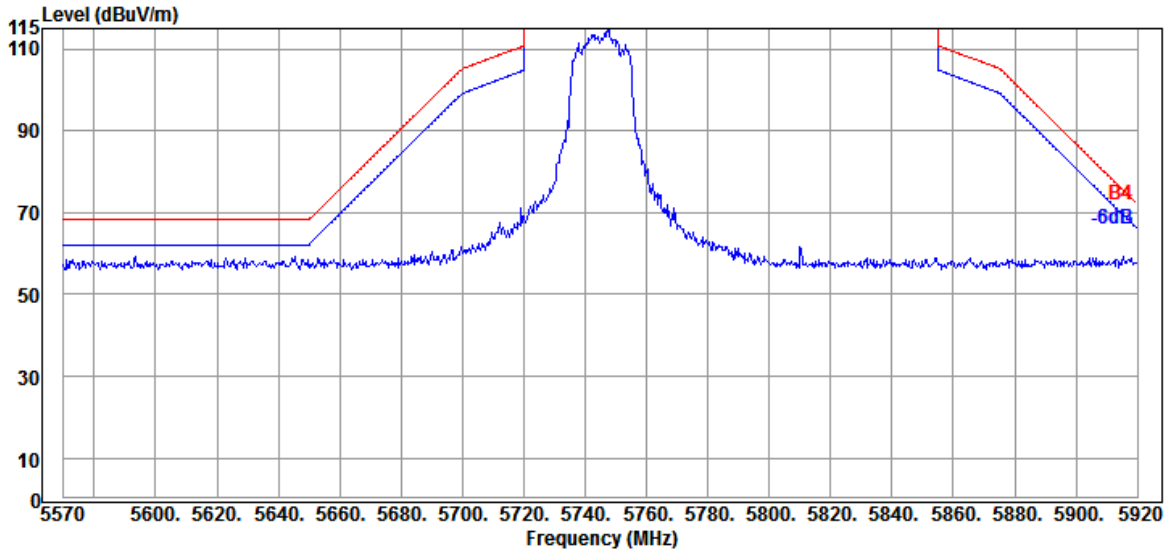


Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

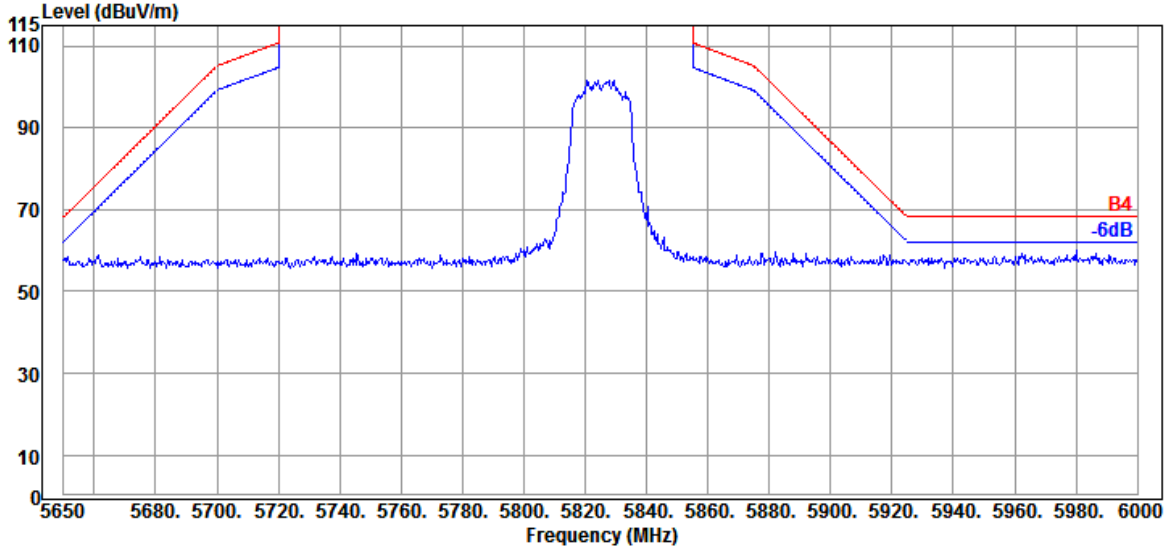

Antenna at Vertical Polarization

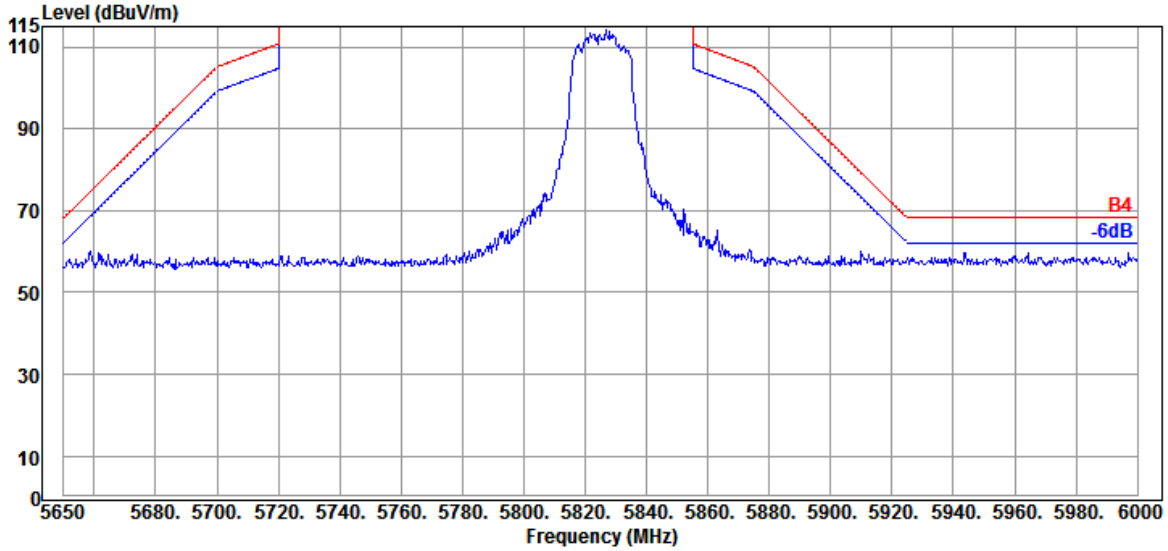


Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

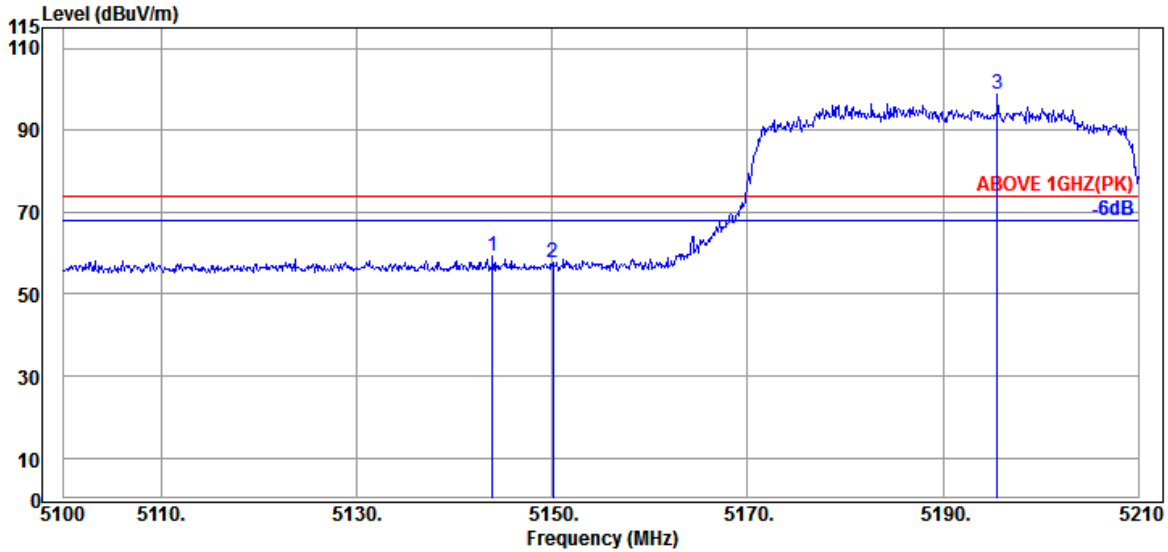

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.890	33.10	8.92	31.63	48.91	59.30	74.00	14.70	Peak
5150.050	33.10	8.92	31.63	47.49	57.88	74.00	16.12	Peak
@ 5195.590	33.20	8.96	31.63	88.36	98.89	---	---	Peak

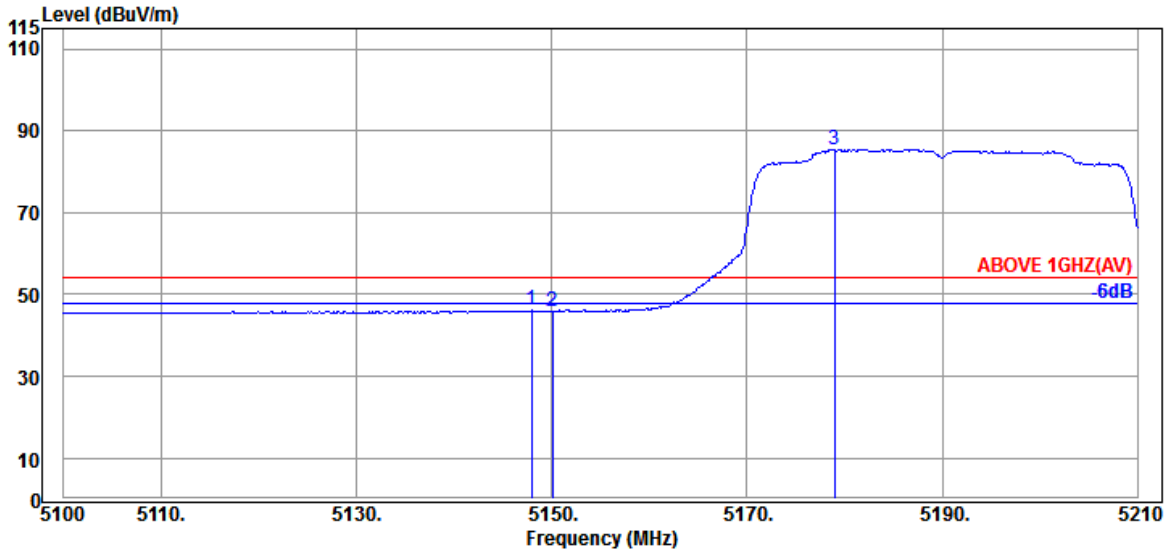


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.960	33.10	8.92	31.63	35.70	46.09	54.00	7.91	Average
5150.050	33.10	8.92	31.63	35.56	45.95	54.00	8.05	Average
@ 5178.980	33.17	8.95	31.63	75.00	85.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

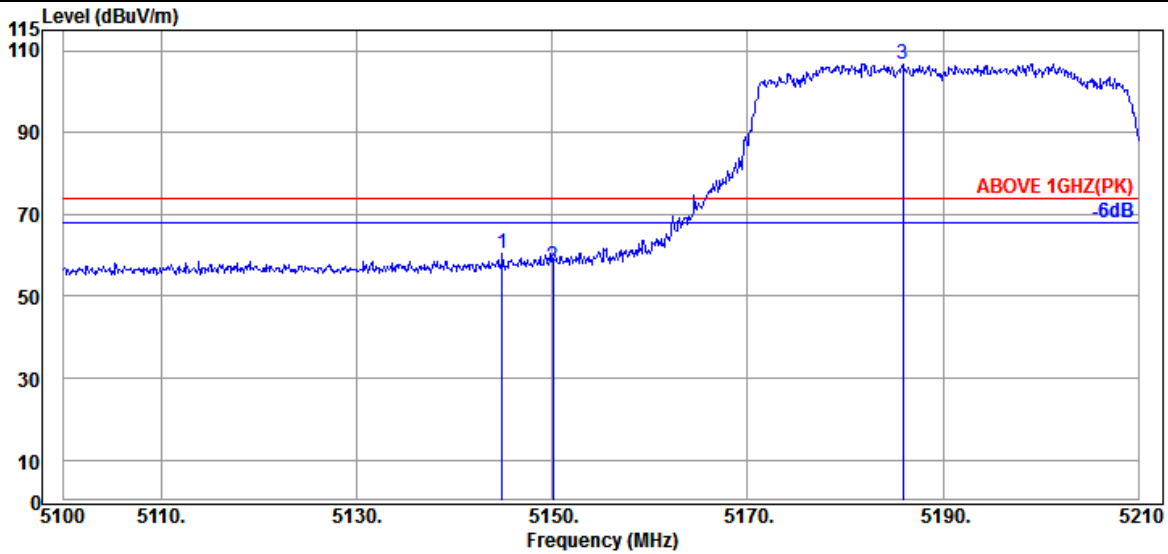

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.880	33.10	8.92	31.63	50.11	60.50	74.00	13.50	Peak
5150.050	33.10	8.92	31.63	47.10	57.49	74.00	16.51	Peak
@ 5185.910	33.17	8.95	31.63	96.16	106.65	---	---	Peak

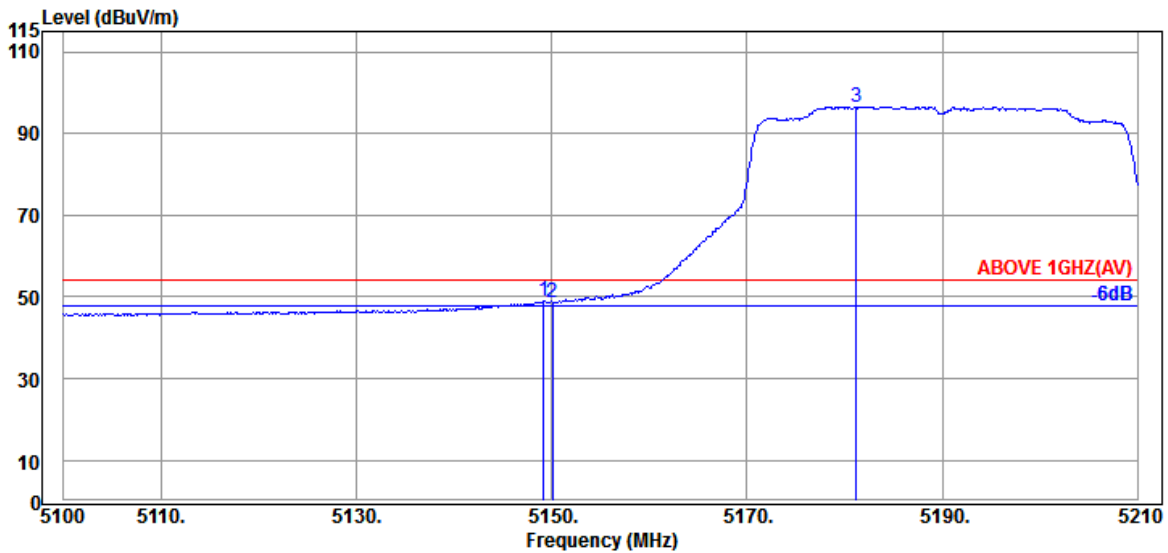


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	33.10	8.92	31.63	38.56	48.95	54.00	5.05	Average
5150.050	33.10	8.92	31.63	38.29	48.68	54.00	5.32	Average
@ 5181.180	33.17	8.95	31.63	86.13	96.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

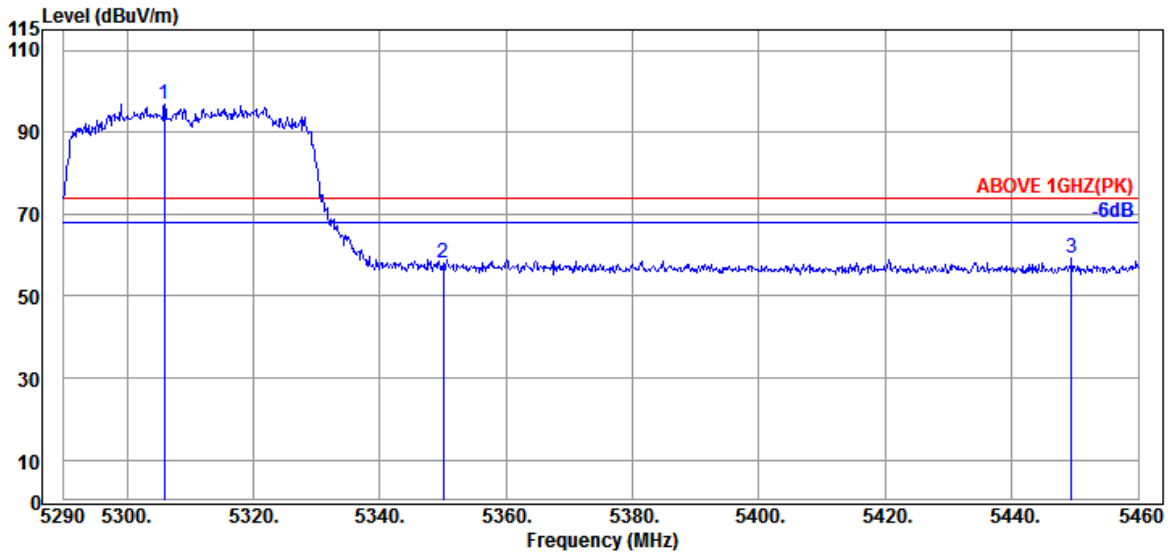

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.980	33.20	9.05	31.63	86.35	96.97	---	---	Peak
5350.010	33.50	9.10	31.63	46.98	57.95	74.00	16.05	Peak
5449.460	33.90	9.18	31.63	47.86	59.31	74.00	14.69	Peak

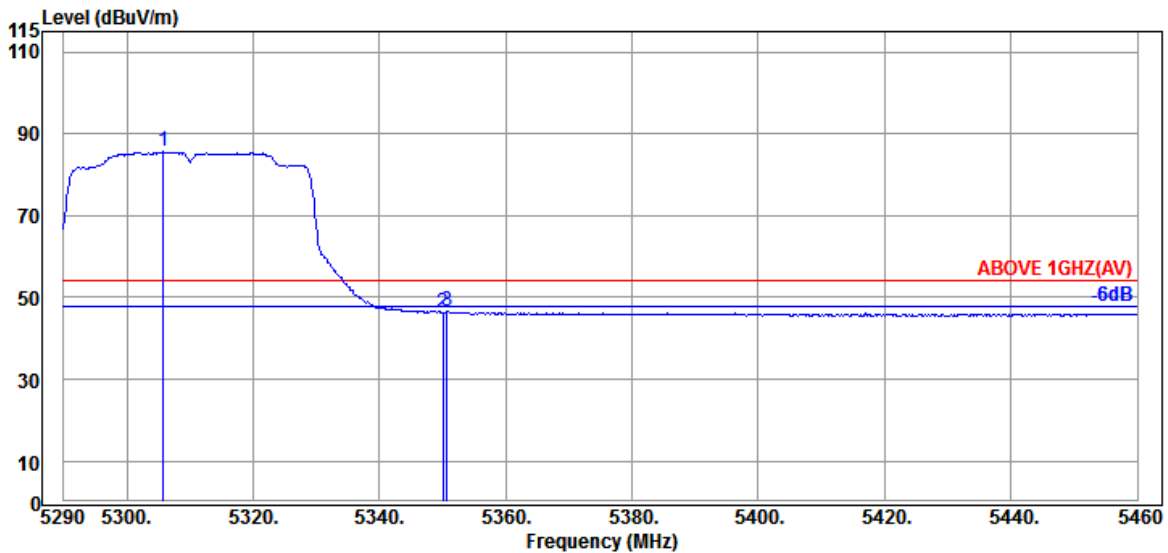


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.810	33.20	9.05	31.63	74.98	85.60	---	---	Average
5350.010	33.50	9.10	31.63	35.39	46.36	54.00	7.64	Average
5350.690	33.50	9.10	31.63	35.56	46.53	54.00	7.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

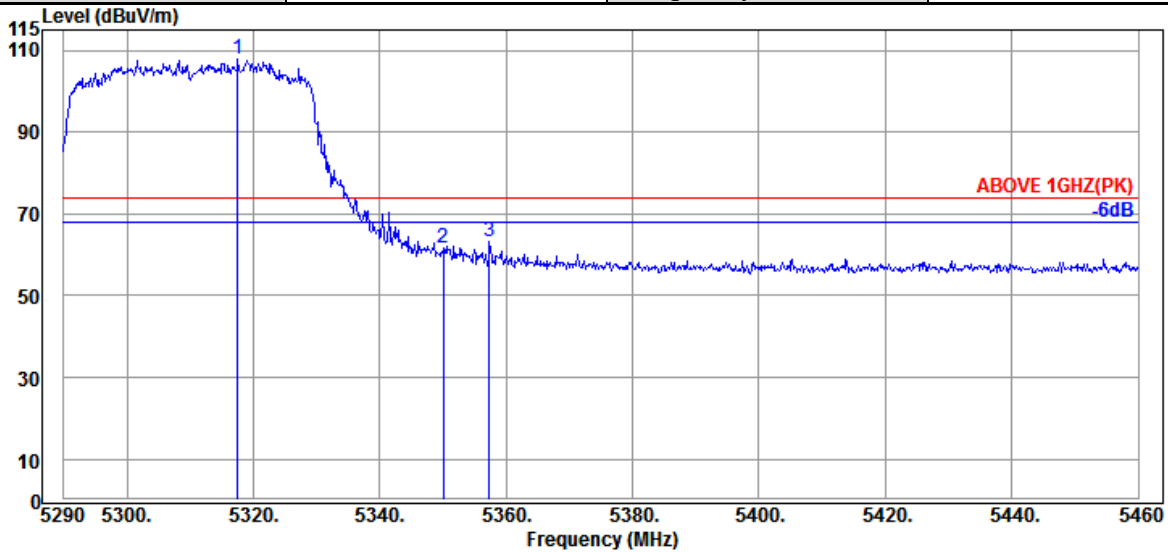

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.540	33.30	9.07	31.63	96.97	107.71	---	---	Peak
5350.010	33.50	9.10	31.63	50.87	61.84	74.00	12.16	Peak
5357.320	33.57	9.10	31.63	52.20	63.24	74.00	10.76	Peak

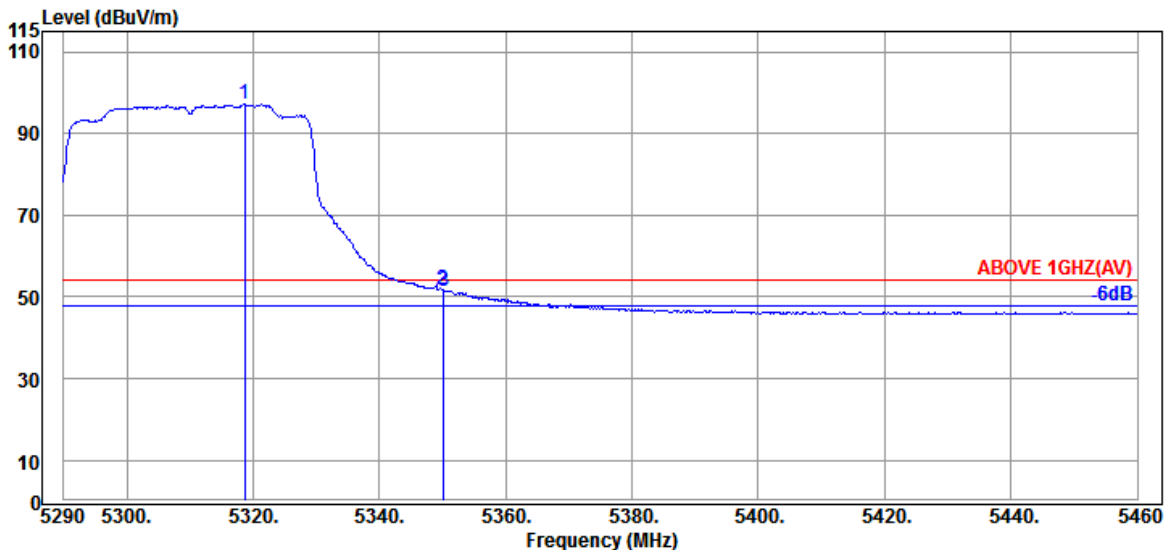


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.730	33.30	9.07	31.63	86.44	97.18	---	---	Average
5350.010	33.50	9.10	31.63	40.63	51.60	54.00	2.40	Average
5350.180	33.50	9.10	31.63	40.38	51.35	54.00	2.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

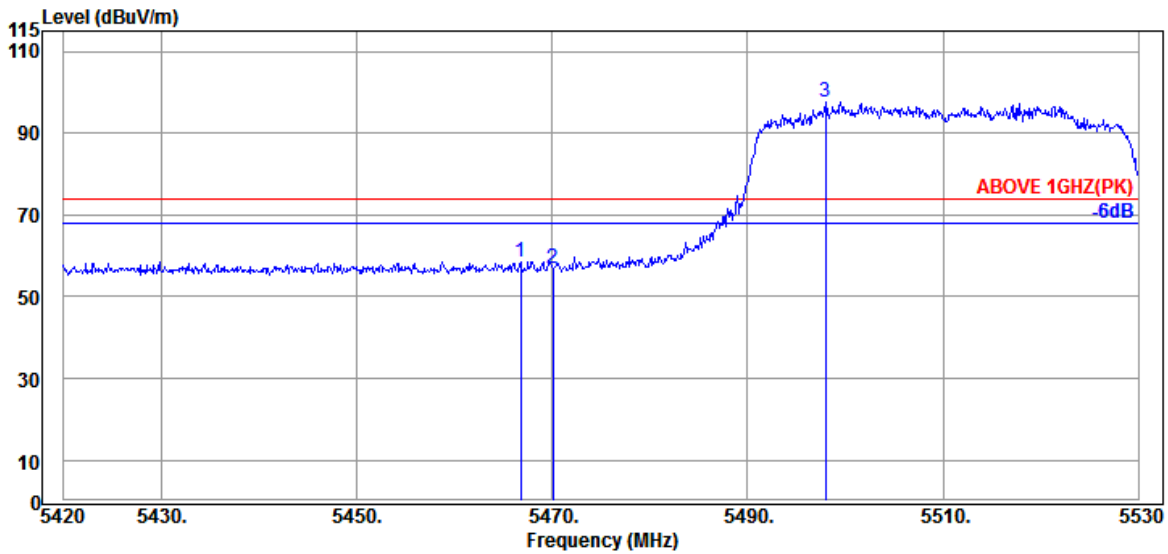

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.750	33.97	9.20	31.63	47.10	58.64	74.00	15.36	Peak
5470.050	33.97	9.20	31.63	45.34	56.88	74.00	17.12	Peak
@ 5497.990	34.10	9.23	31.63	85.95	97.65	---	---	Peak

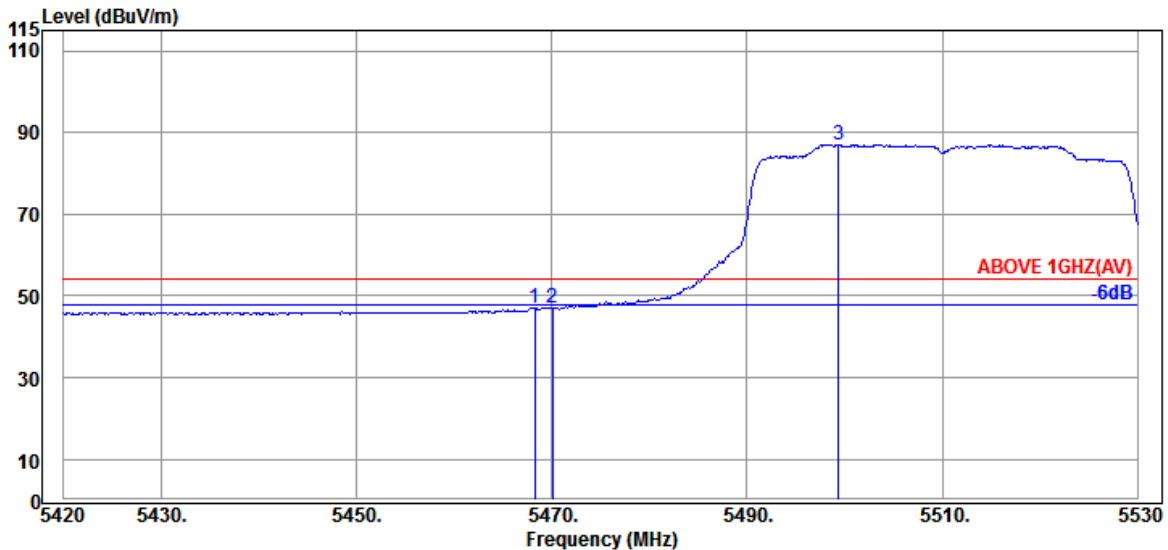


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	33.97	9.20	31.63	35.47	47.01	54.00	6.99	Average
5470.050	33.97	9.20	31.63	35.56	47.10	54.00	6.90	Average
@ 5499.420	34.10	9.23	31.63	75.44	87.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

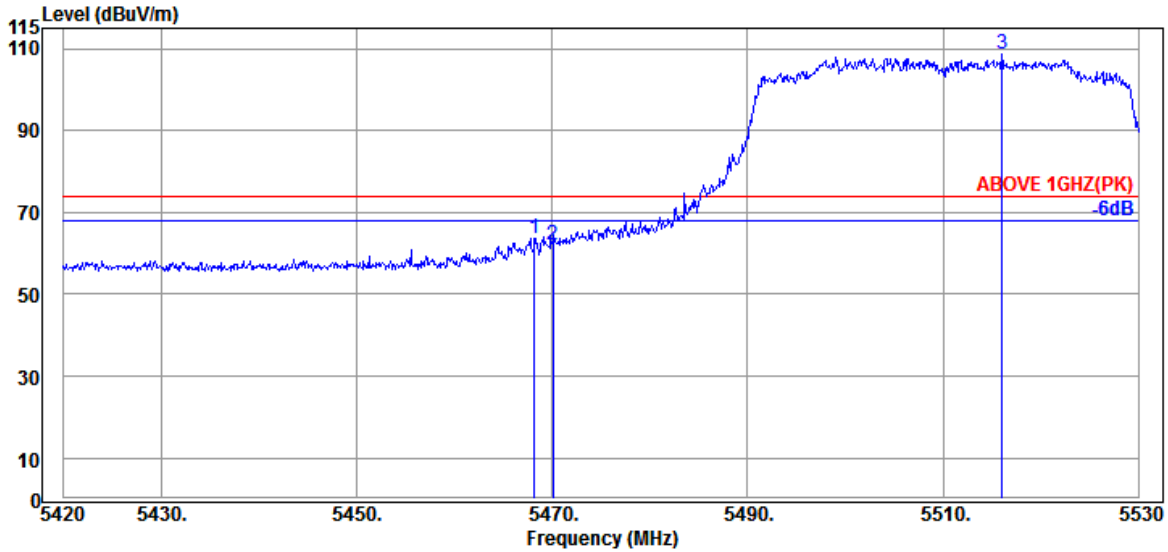

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.180	33.97	9.20	31.63	52.21	63.75	74.00	10.25	Peak
5470.050	33.97	9.20	31.63	50.57	62.11	74.00	11.89	Peak
@ 5516.030	34.13	9.24	31.64	96.86	108.59	---	---	Peak

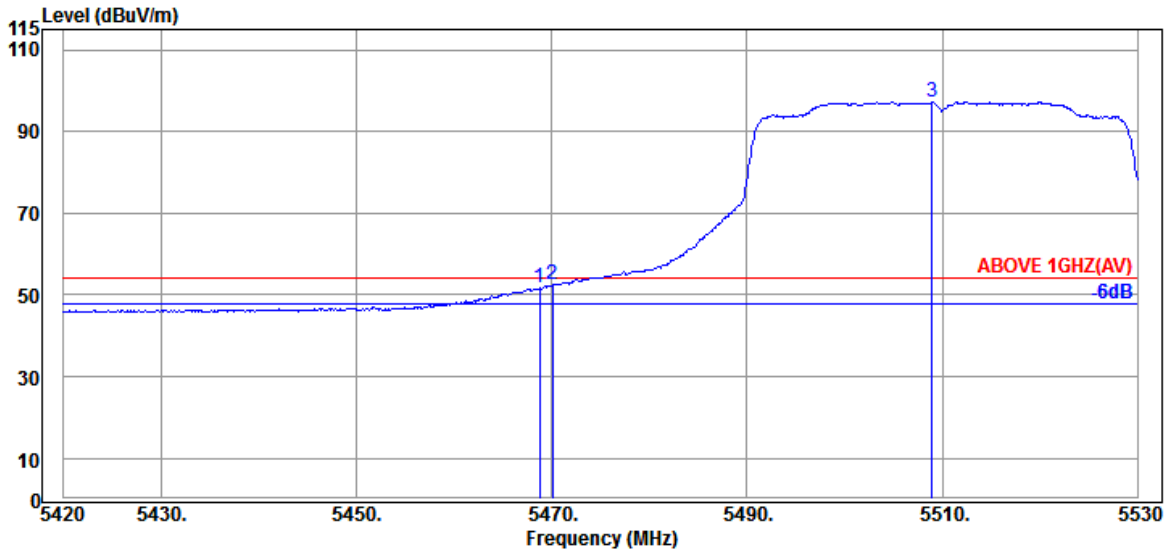


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.730	33.97	9.20	31.63	40.13	51.67	54.00	2.33	Average
5470.050	33.97	9.20	31.63	40.88	52.42	54.00	1.58	Average
@ 5508.990	34.10	9.23	31.64	85.54	97.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

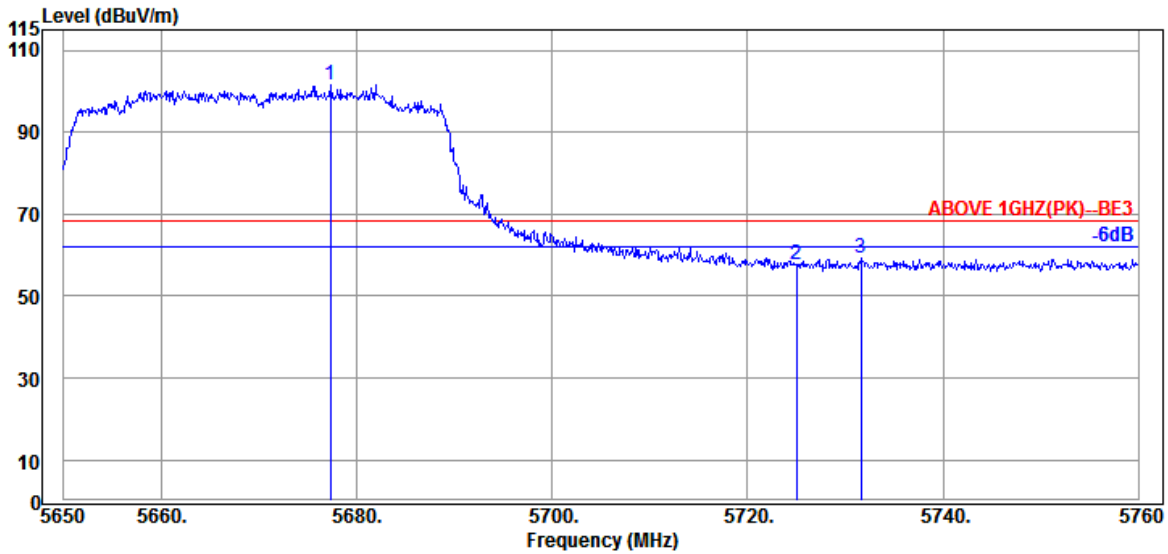

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.280	34.30	9.37	31.72	89.58	101.53	---	---	Peak
5725.020	34.50	9.42	31.74	45.35	57.53	68.20	10.67	Peak
5731.620	34.50	9.42	31.75	47.29	59.46	68.20	8.74	Peak

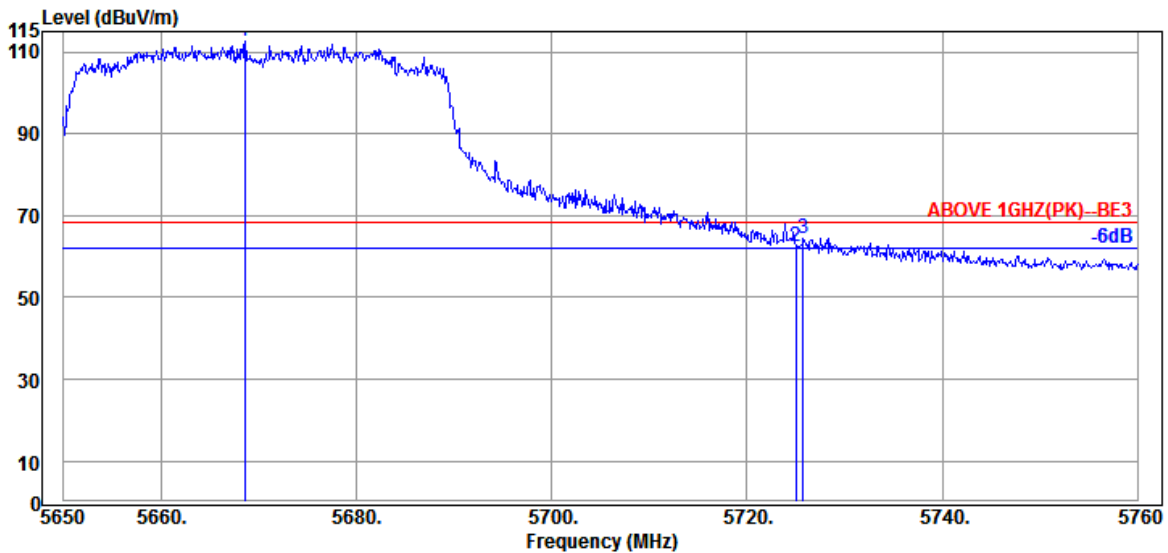


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.590	34.30	9.37	31.71	100.56	112.52	---	---	Peak
5725.020	34.50	9.42	31.74	50.11	62.29	68.20	5.91	Peak
5725.790	34.50	9.42	31.74	52.42	64.60	68.20	3.60	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

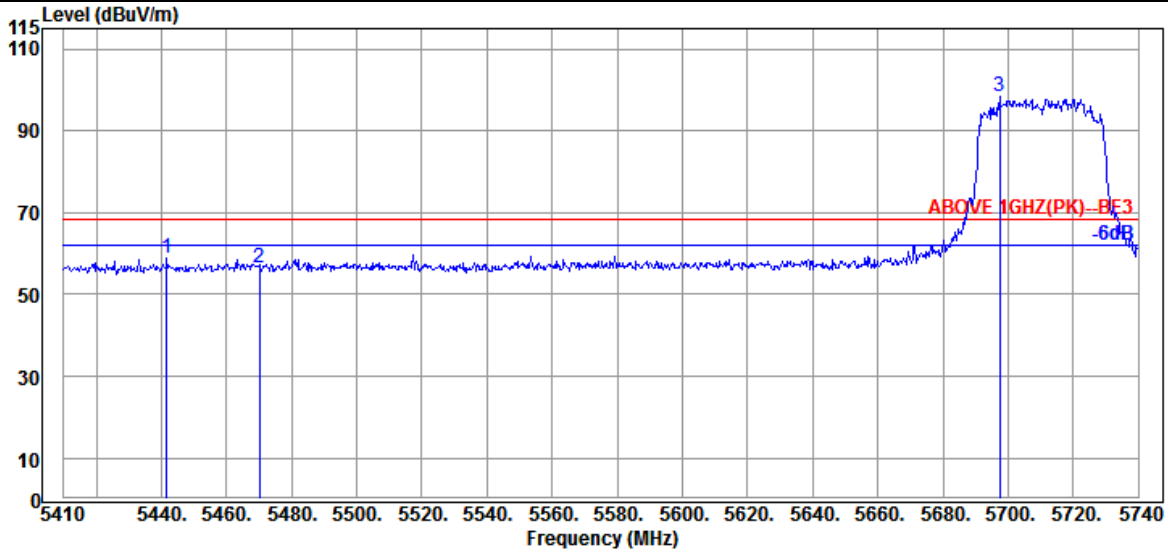

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.680	33.85	9.17	31.63	47.39	58.78	68.20	9.42	Peak
5470.060	33.97	9.20	31.63	44.96	56.50	68.20	11.70	Peak
@ 5697.430	34.30	9.39	31.73	86.47	98.43	---	---	Peak

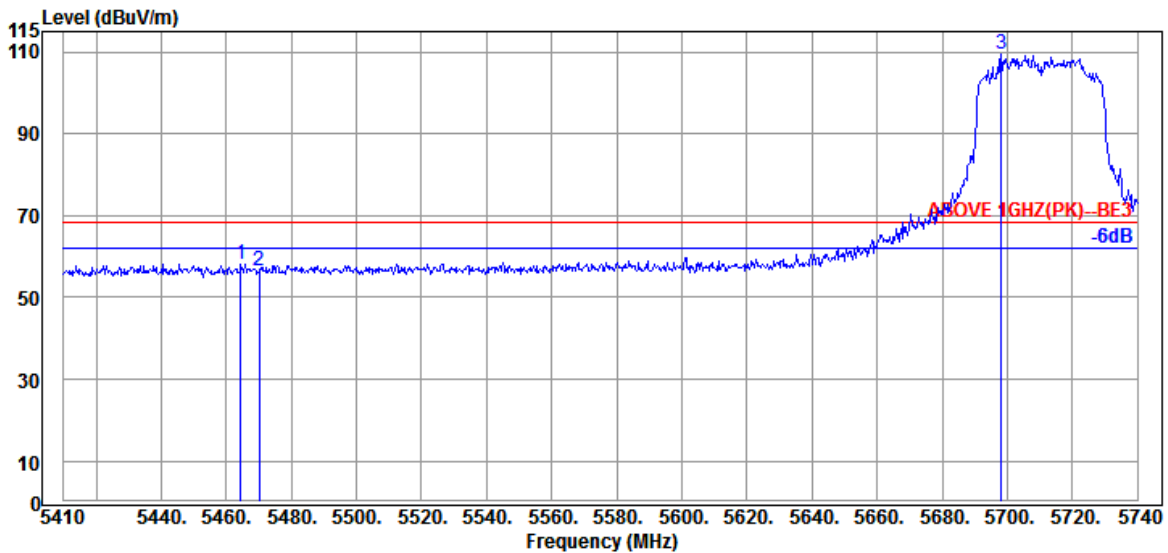


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	33.97	9.20	31.63	46.66	58.20	68.20	10.00	Peak
5470.060	33.97	9.20	31.63	45.16	56.70	68.20	11.50	Peak
@ 5698.090	34.30	9.39	31.73	97.53	109.49	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

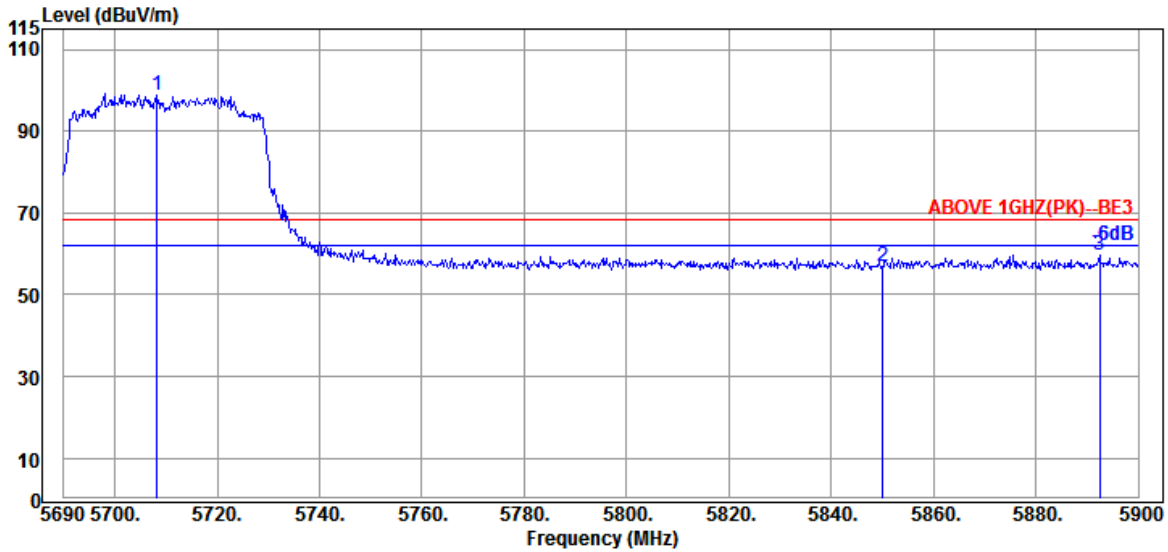

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5708.270	34.40	9.40	31.74	86.91	98.97	---	---	Peak
5850.020	35.00	9.52	31.80	44.08	56.80	68.20	11.40	Peak
5892.440	35.10	9.56	31.82	46.84	59.68	68.20	8.52	Peak

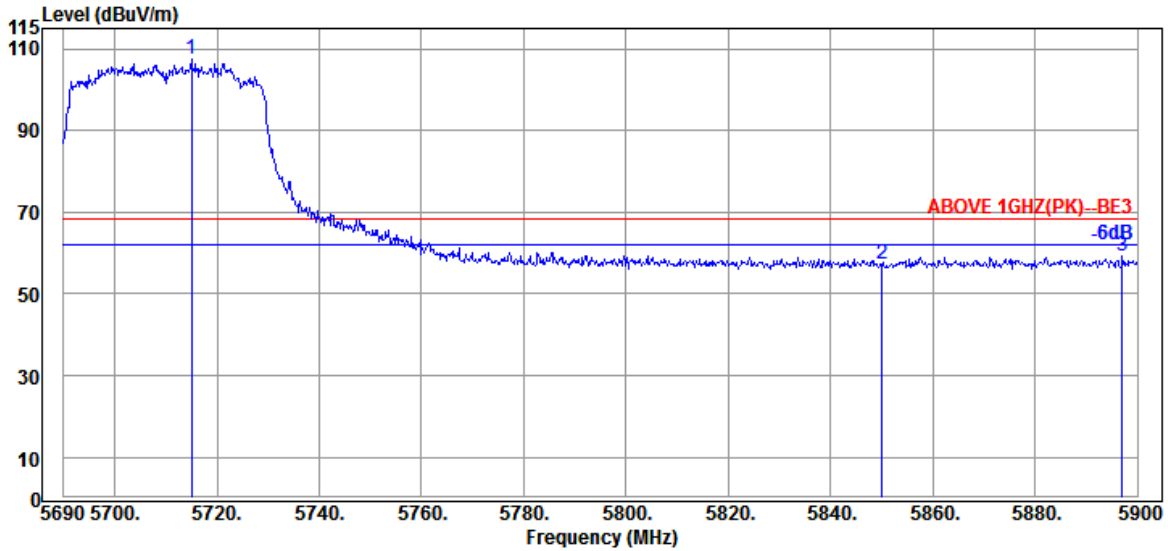


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5714.990	34.40	9.40	31.74	95.62	107.68	---	---	Peak
5850.020	35.00	9.52	31.80	44.74	57.46	68.20	10.74	Peak
5897.060	35.10	9.56	31.82	46.37	59.21	68.20	8.99	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

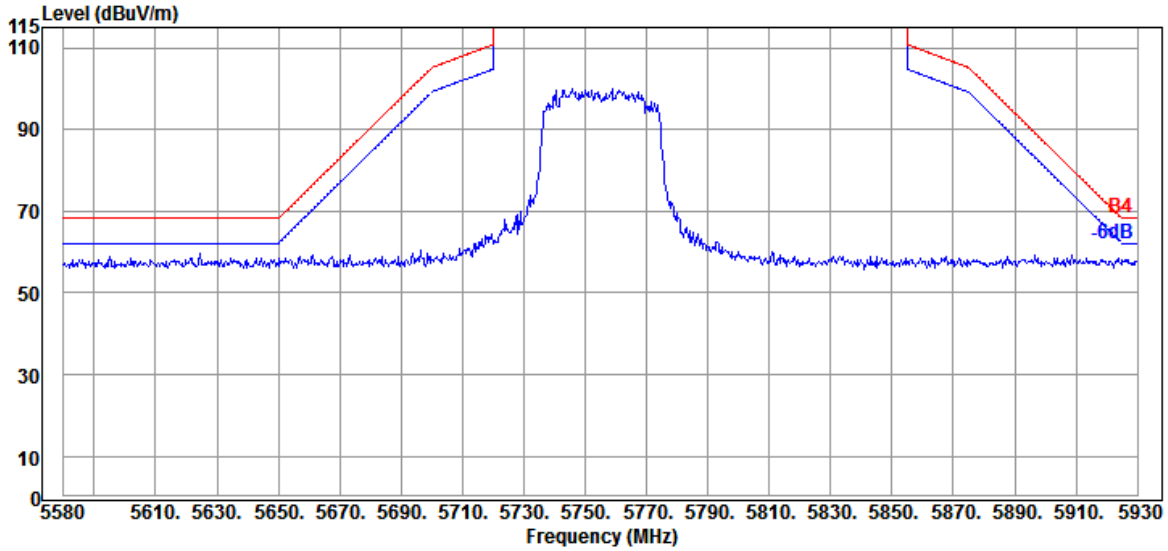


Antenna at Vertical Polarization

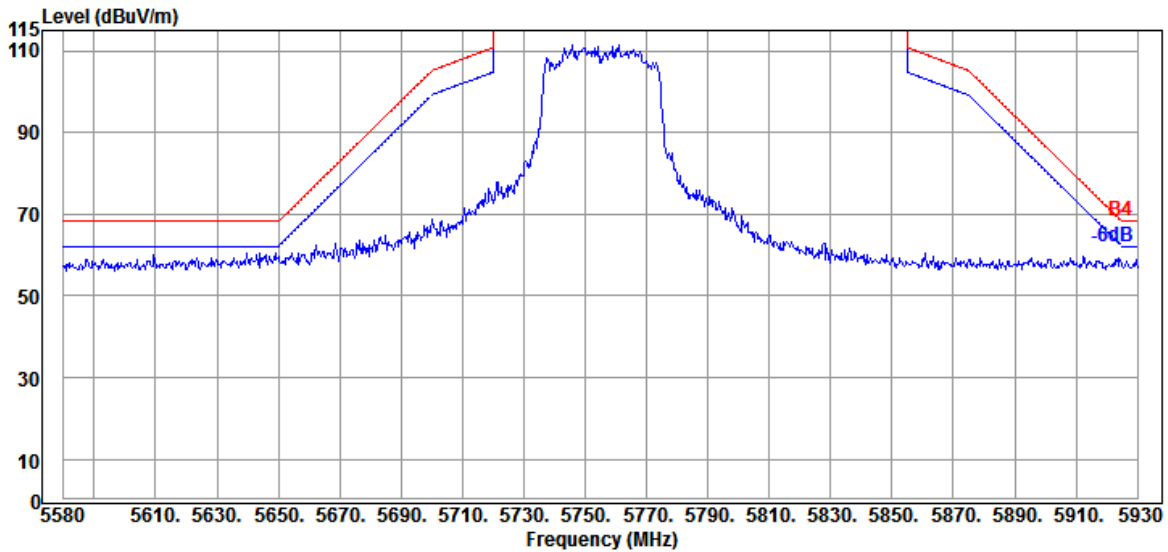


Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

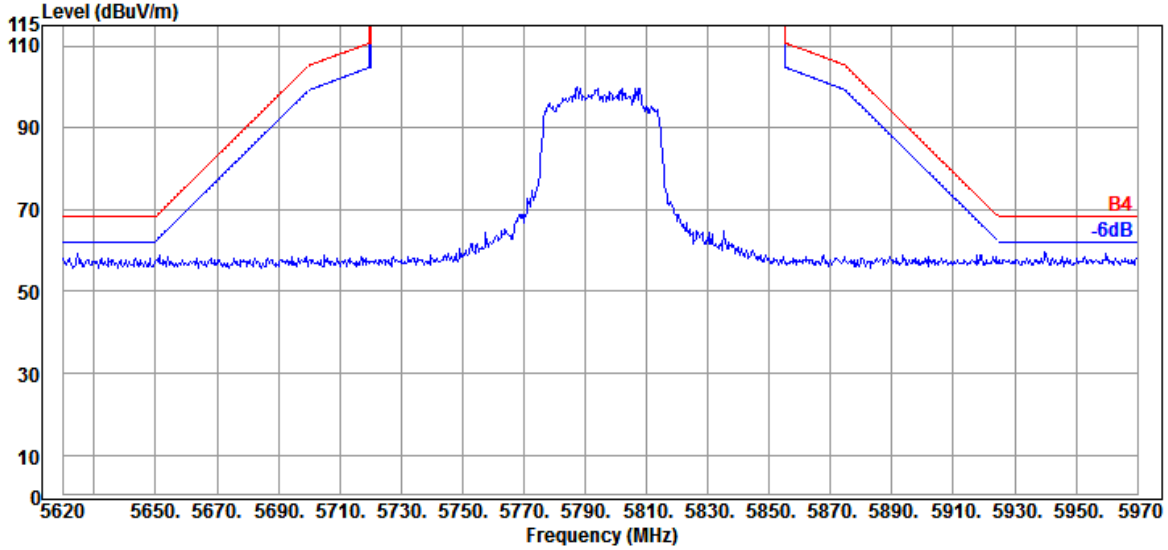

Antenna at Vertical Polarization

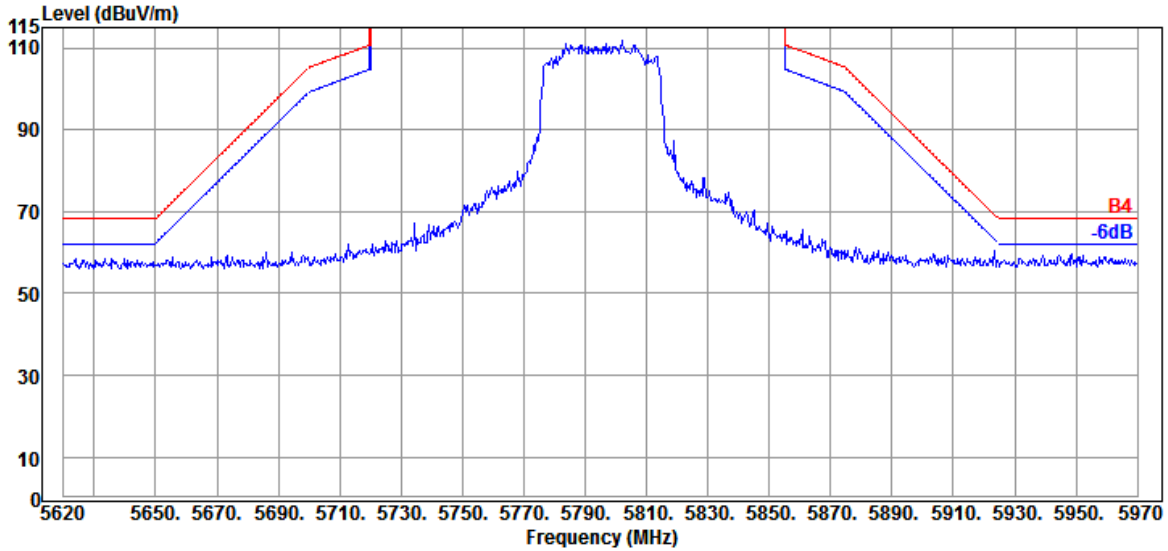


Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

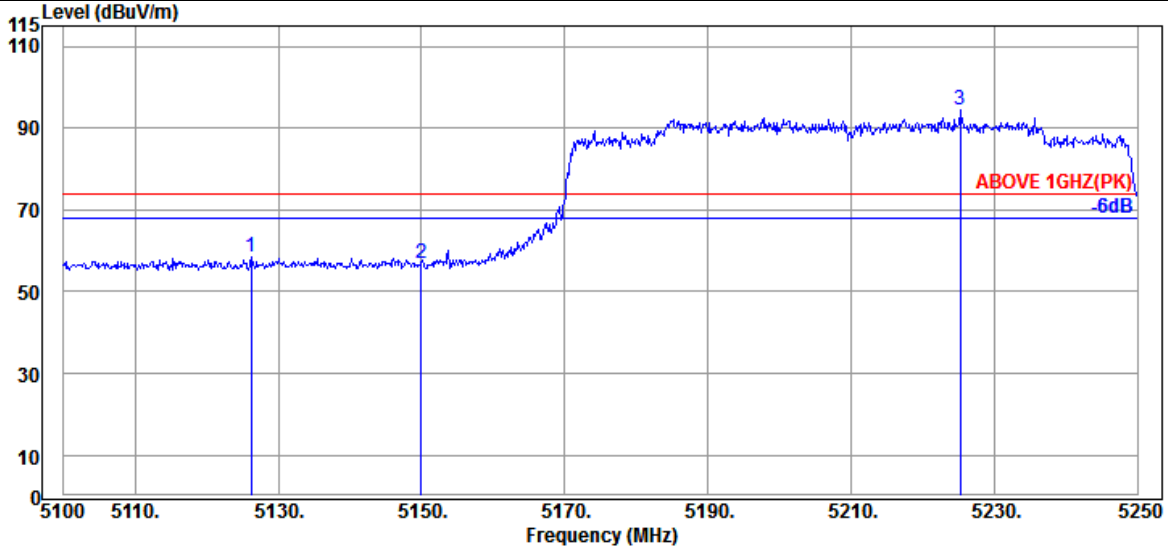

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.250	33.03	8.91	31.63	48.14	58.45	74.00	15.55	Peak
5149.950	33.10	8.92	31.63	46.48	56.87	74.00	17.13	Peak
@ 5225.250	33.15	8.99	31.63	84.09	94.60	---	---	Peak

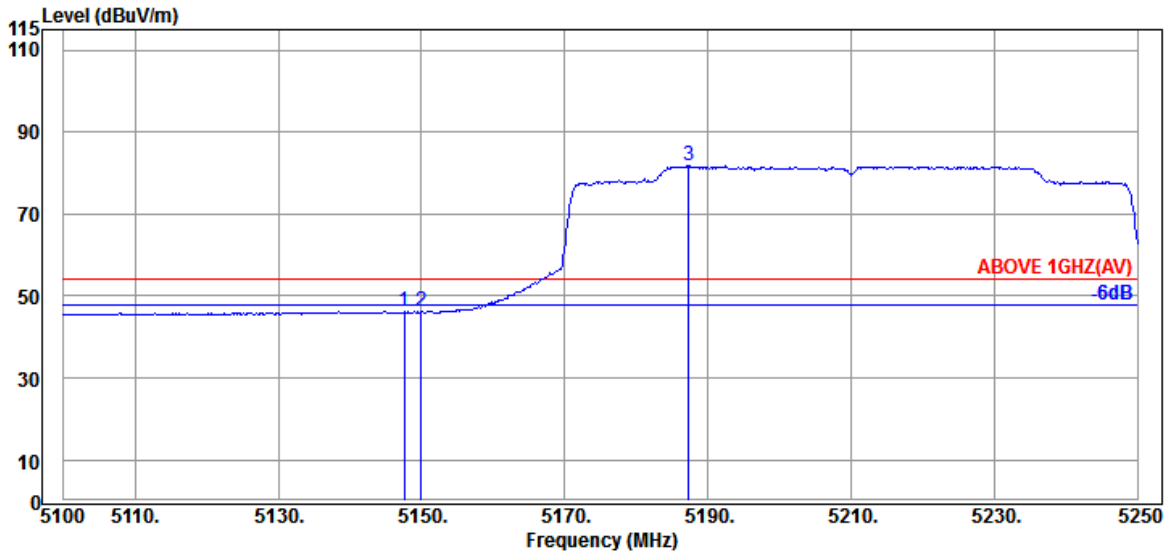


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.550	33.10	8.92	31.63	35.83	46.22	54.00	7.78	Average
5149.950	33.10	8.92	31.63	35.79	46.18	54.00	7.82	Average
@ 5187.300	33.20	8.95	31.63	71.18	81.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

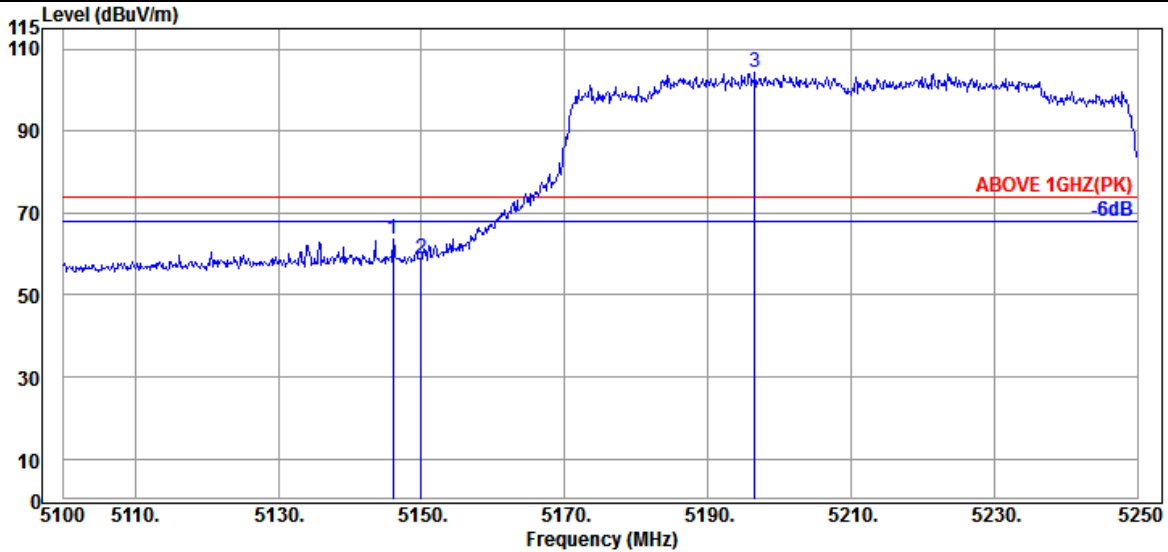

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.050	33.10	8.92	31.63	53.11	63.50	74.00	10.50	Peak
5149.950	33.10	8.92	31.63	48.33	58.72	74.00	15.28	Peak
@ 5196.600	33.20	8.96	31.63	93.83	104.36	---	---	Peak

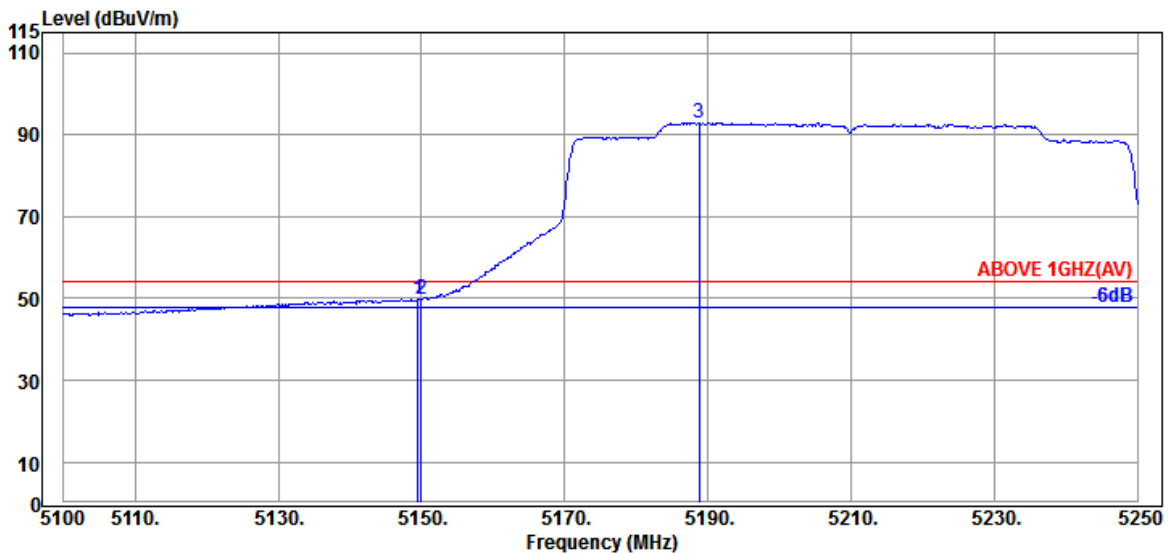


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.10	8.92	31.63	39.47	49.86	54.00	4.14	Average
5149.950	33.10	8.92	31.63	39.53	49.92	54.00	4.08	Average
@ 5188.800	33.20	8.95	31.63	82.54	93.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

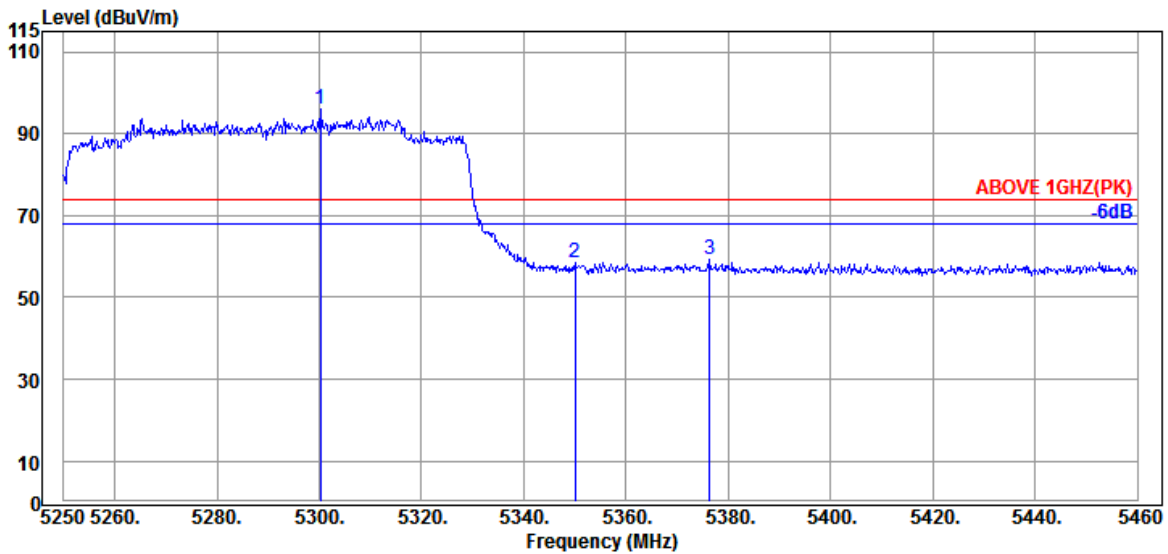

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.190	33.20	9.05	31.63	85.44	96.06	---	---	Peak
5349.960	33.50	9.10	31.63	47.67	58.64	74.00	15.36	Peak
5376.420	33.63	9.11	31.63	48.05	59.16	74.00	14.84	Peak

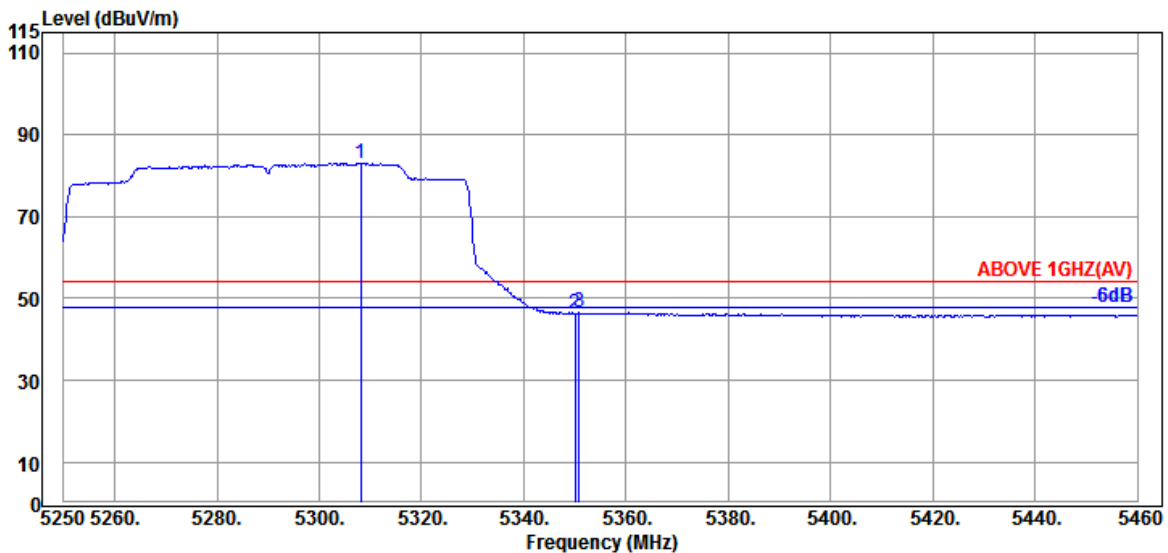


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.170	33.30	9.05	31.63	72.41	83.13	---	---	Average
5349.960	33.50	9.10	31.63	35.28	46.25	54.00	7.75	Average
5350.800	33.50	9.10	31.63	35.55	46.52	54.00	7.48	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

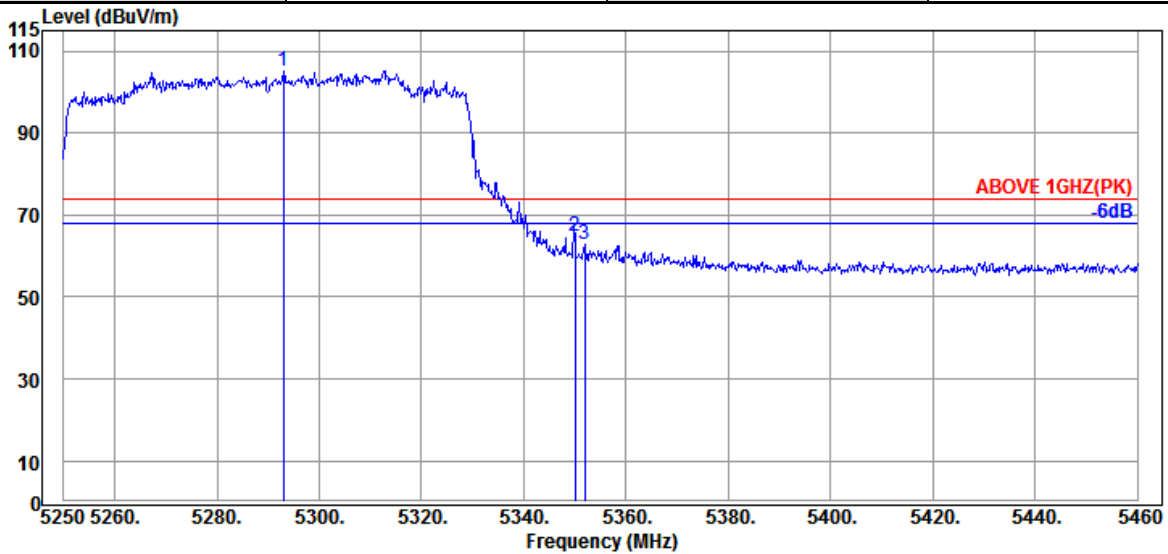

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.050	33.20	9.05	31.63	94.52	105.14	---	---	Peak
5349.960	33.50	9.10	31.63	53.76	64.73	74.00	9.27	Peak
5351.850	33.50	9.10	31.63	51.70	62.67	74.00	11.33	Peak

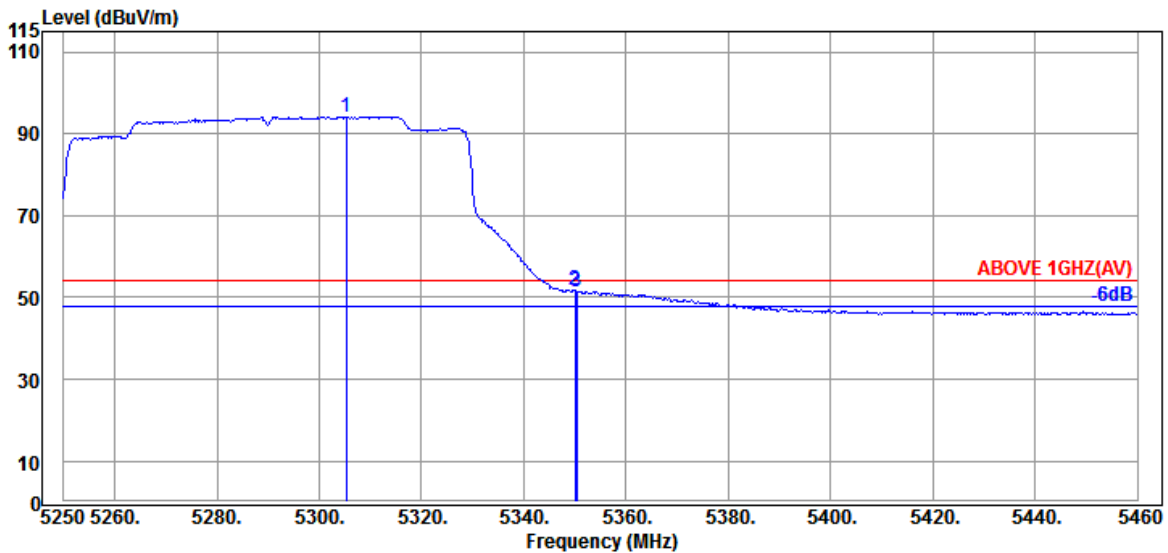


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.230	33.20	9.05	31.63	83.63	94.25	---	---	Average
5349.960	33.50	9.10	31.63	40.86	51.83	54.00	2.17	Average
5350.380	33.50	9.10	31.63	40.52	51.49	54.00	2.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

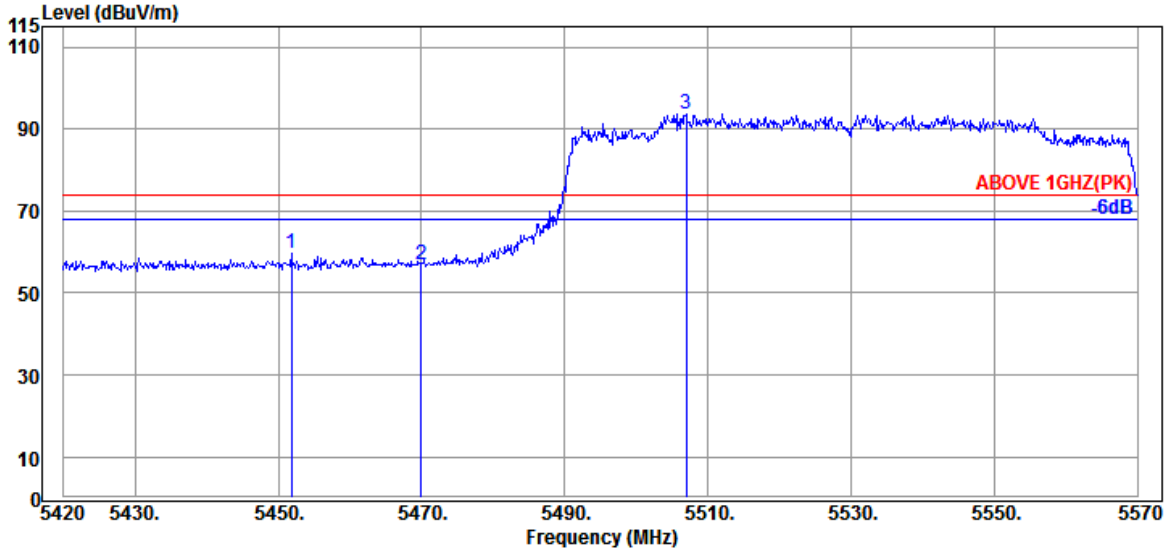

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.800	33.90	9.18	31.63	48.04	59.49	74.00	14.51	Peak
5469.950	33.97	9.20	31.63	45.43	56.97	74.00	17.03	Peak
@ 5507.000	34.10	9.23	31.64	82.14	93.83	---	---	Peak

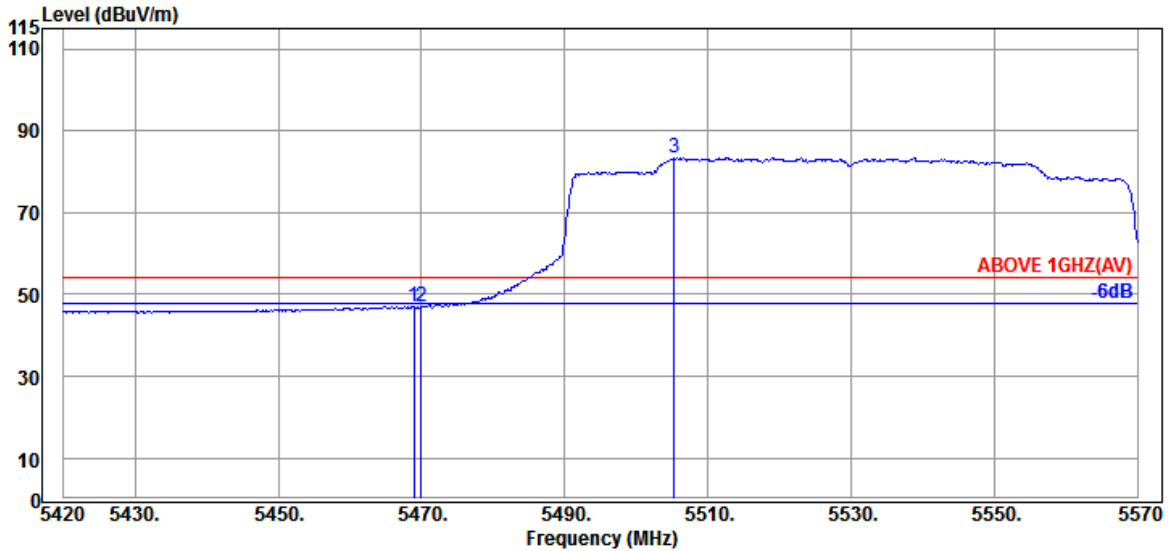


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	35.49	47.03	54.00	6.97	Average
5469.950	33.97	9.20	31.63	35.35	46.89	54.00	7.11	Average
@ 5505.350	34.10	9.23	31.63	71.62	83.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

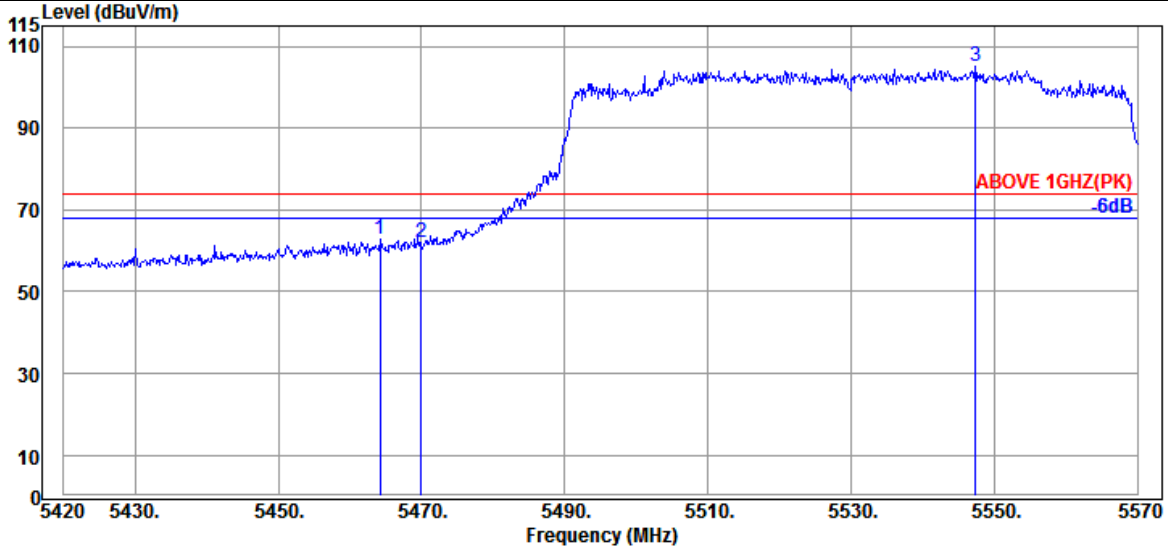

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.250	33.97	9.20	31.63	51.39	62.93	74.00	11.07	Peak
5469.950	33.97	9.20	31.63	50.64	62.18	74.00	11.82	Peak
@ 5547.350	34.20	9.26	31.66	93.17	104.97	---	---	Peak

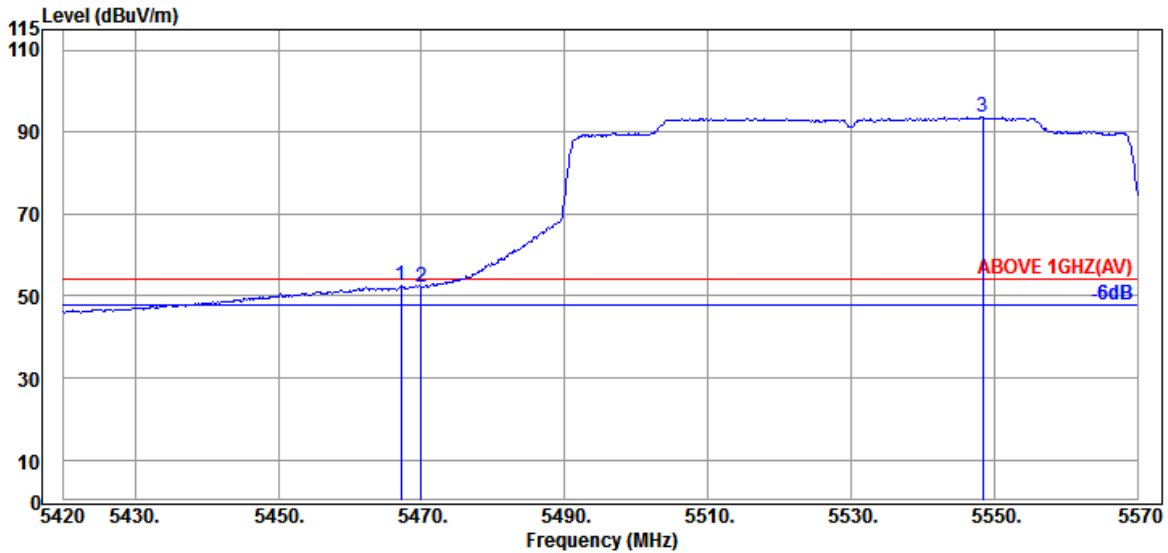


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	33.97	9.20	31.63	40.92	52.46	54.00	1.54	Average
5469.950	33.97	9.20	31.63	40.71	52.25	54.00	1.75	Average
@ 5548.400	34.20	9.27	31.66	81.72	93.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

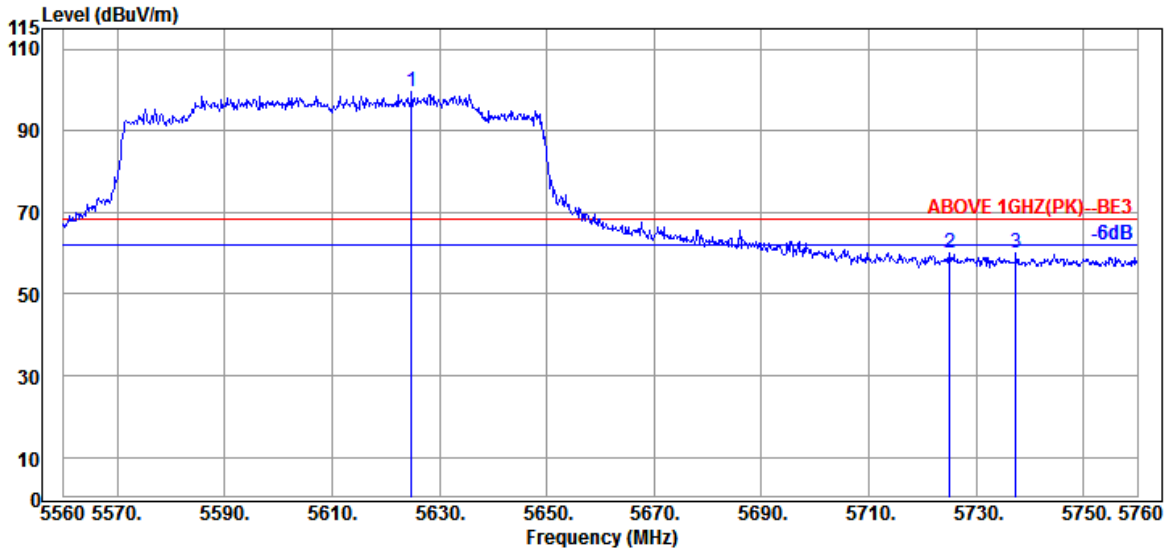

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.800	34.27	9.33	31.69	87.54	99.45	---	---	Peak
5725.000	34.50	9.42	31.74	47.89	60.07	68.20	8.13	Peak
5737.400	34.50	9.43	31.75	47.97	60.15	68.20	8.05	Peak

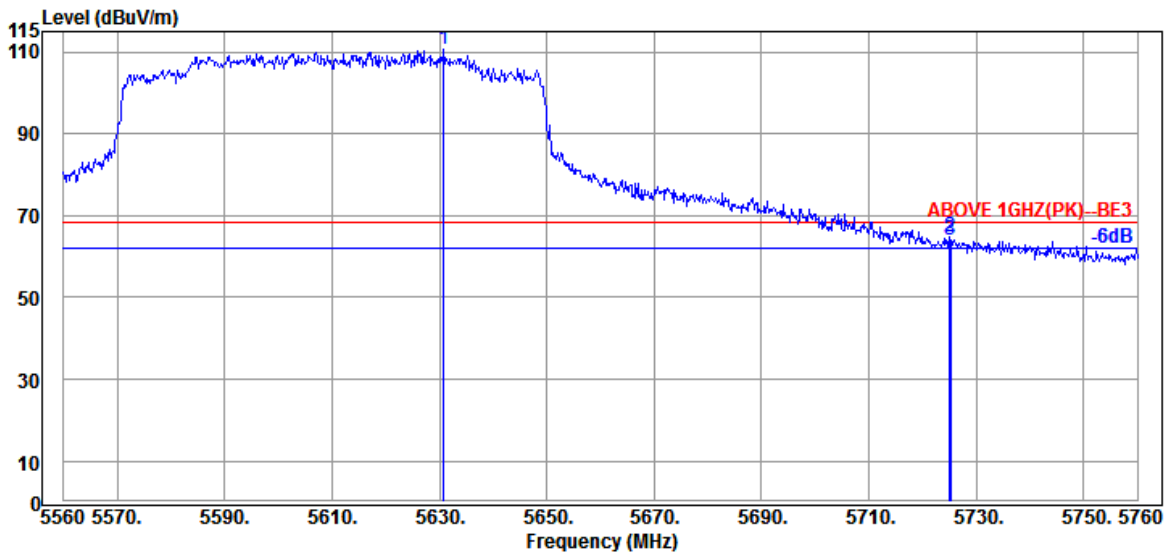


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5630.800	34.27	9.33	31.69	98.63	110.54	---	---	Peak
5725.000	34.50	9.42	31.74	52.63	64.81	68.20	3.39	Peak
5725.200	34.50	9.42	31.74	51.82	64.00	68.20	4.20	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

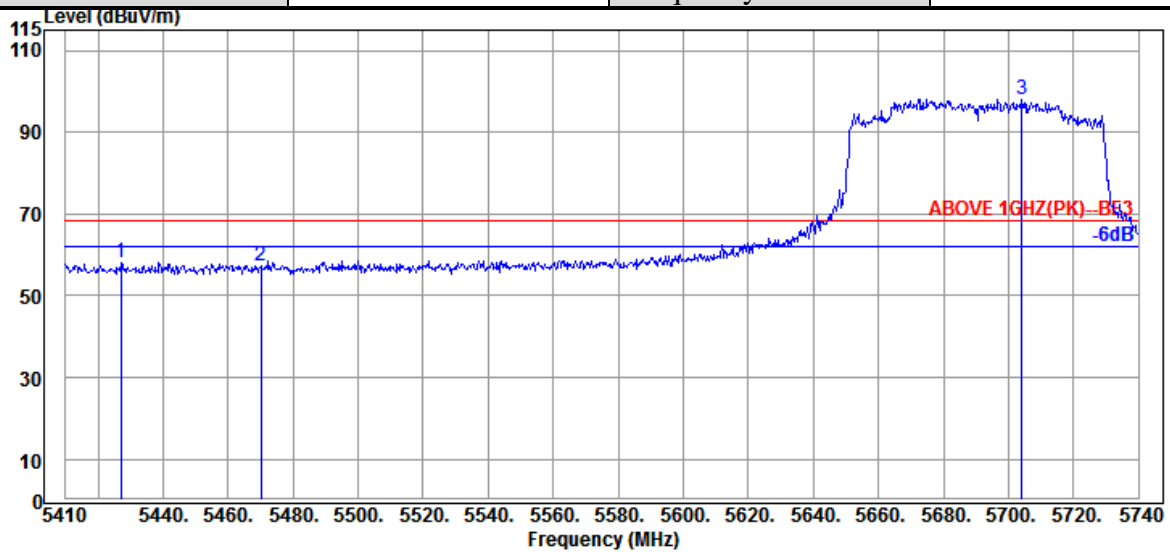

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.160	33.80	9.15	31.63	46.91	58.23	68.20	9.97	Peak
5470.060	33.97	9.20	31.63	45.59	57.13	68.20	11.07	Peak
@ 5704.030	34.30	9.40	31.73	86.23	98.20	---	---	Peak

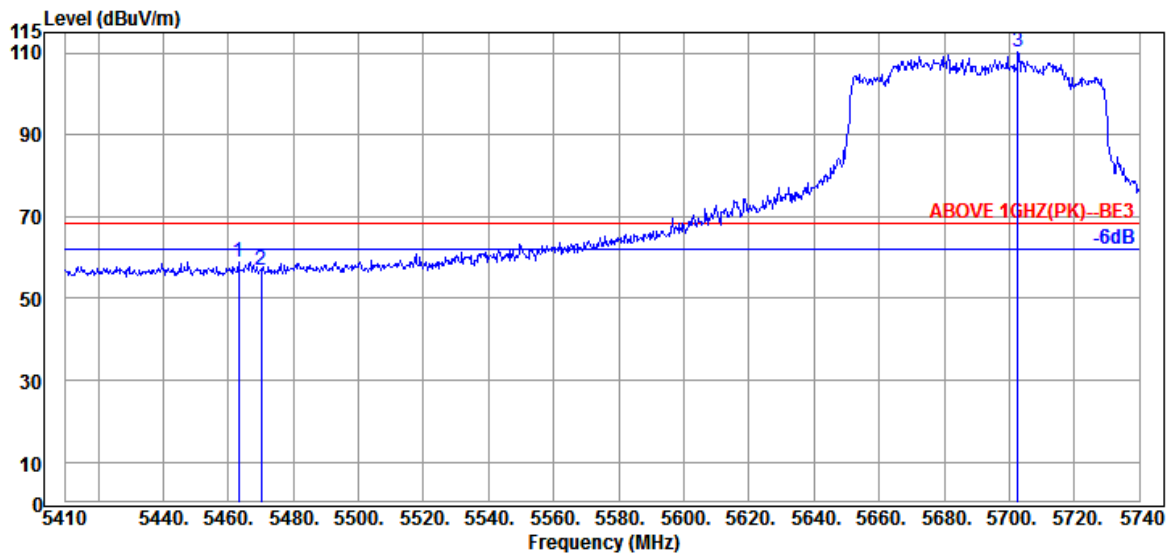


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.130	33.90	9.20	31.63	47.44	58.91	68.20	9.29	Peak
5470.060	33.97	9.20	31.63	45.55	57.09	68.20	11.11	Peak
@ 5702.710	34.30	9.40	31.73	98.34	110.31	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

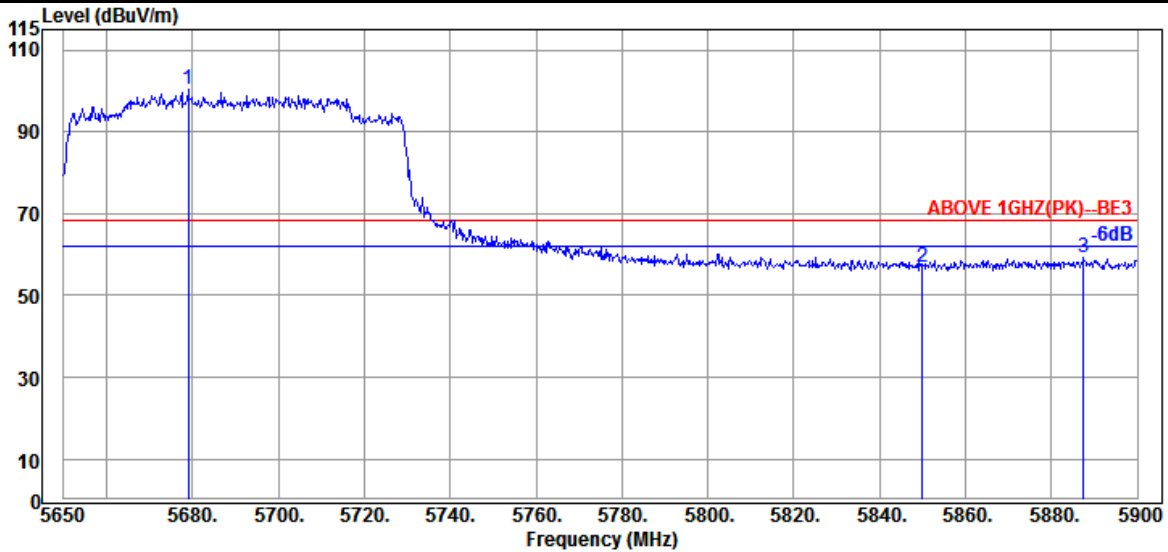

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.000	34.30	9.37	31.72	88.41	100.36	---	---	Peak
5850.000	35.00	9.52	31.80	44.25	56.97	68.20	11.23	Peak
5887.500	35.07	9.56	31.82	46.45	59.26	68.20	8.94	Peak

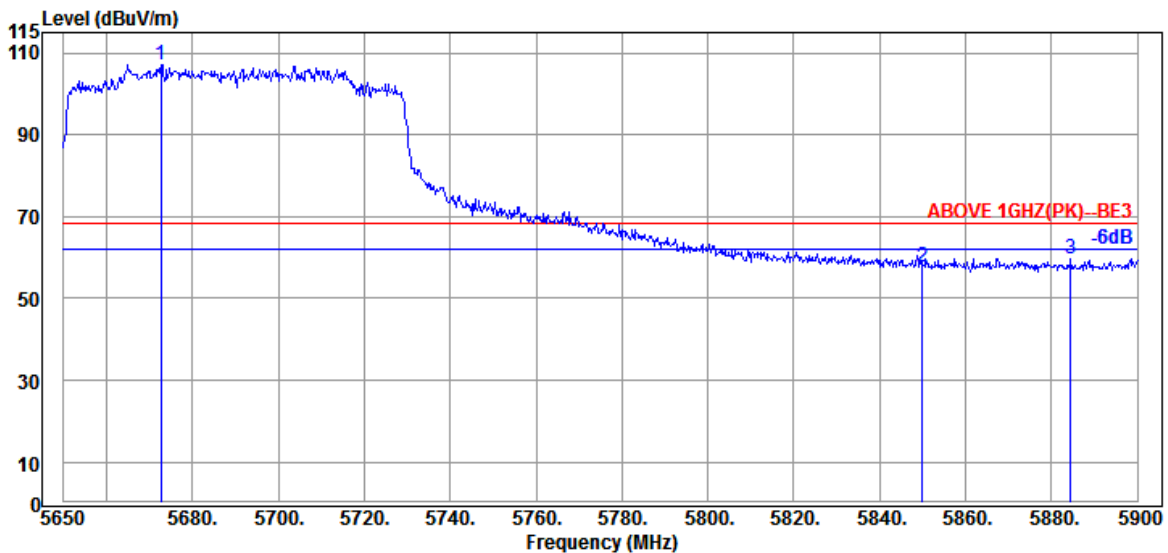


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.750	34.30	9.37	31.72	95.17	107.12	---	---	Peak
5850.000	35.00	9.52	31.80	44.96	57.68	68.20	10.52	Peak
5884.500	35.07	9.55	31.82	46.89	59.69	68.20	8.51	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

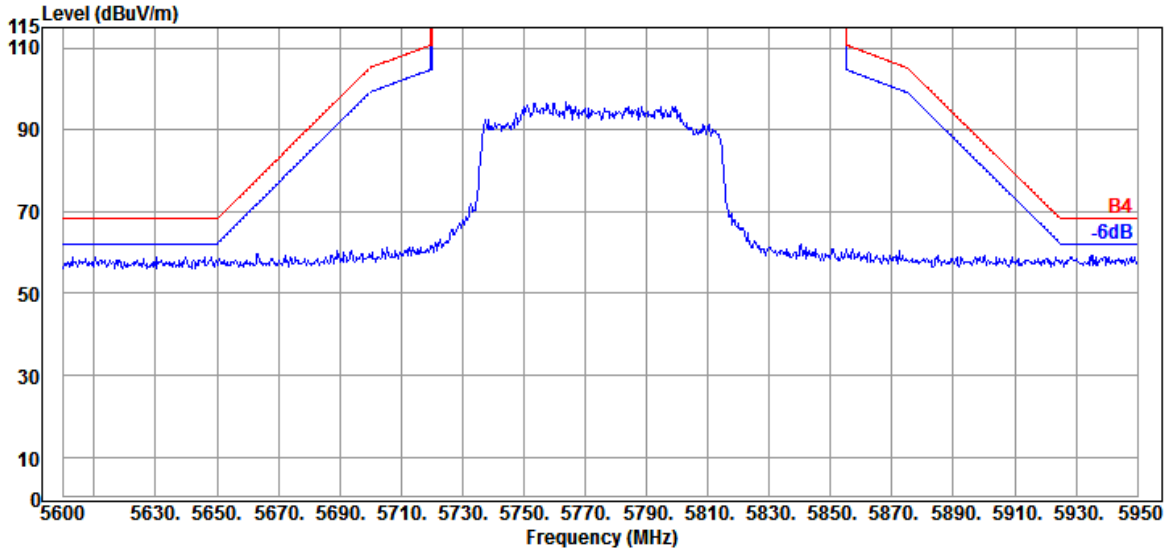

Antenna at Vertical Polarization

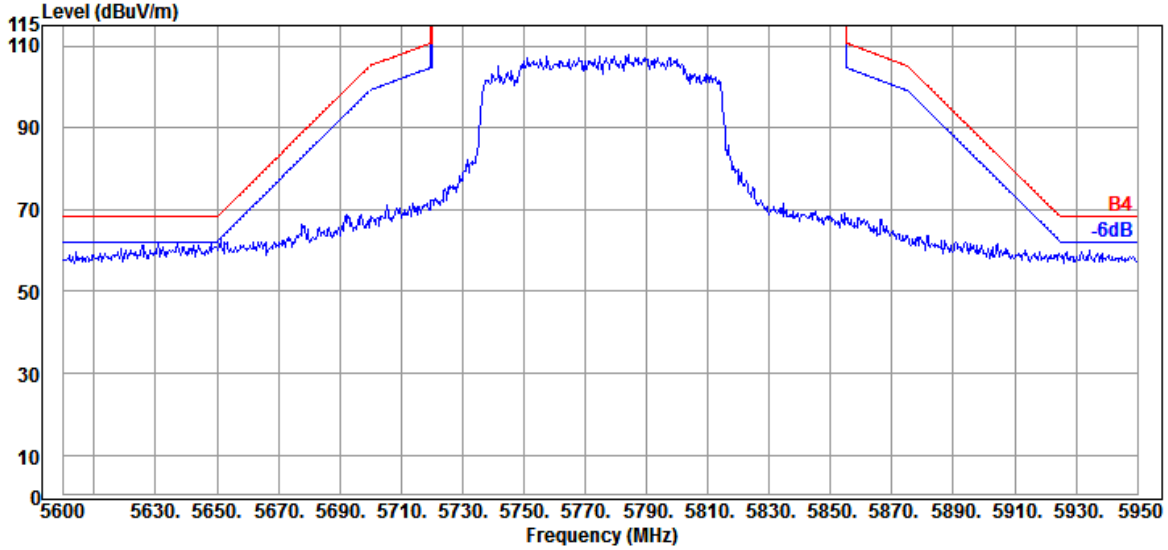


Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

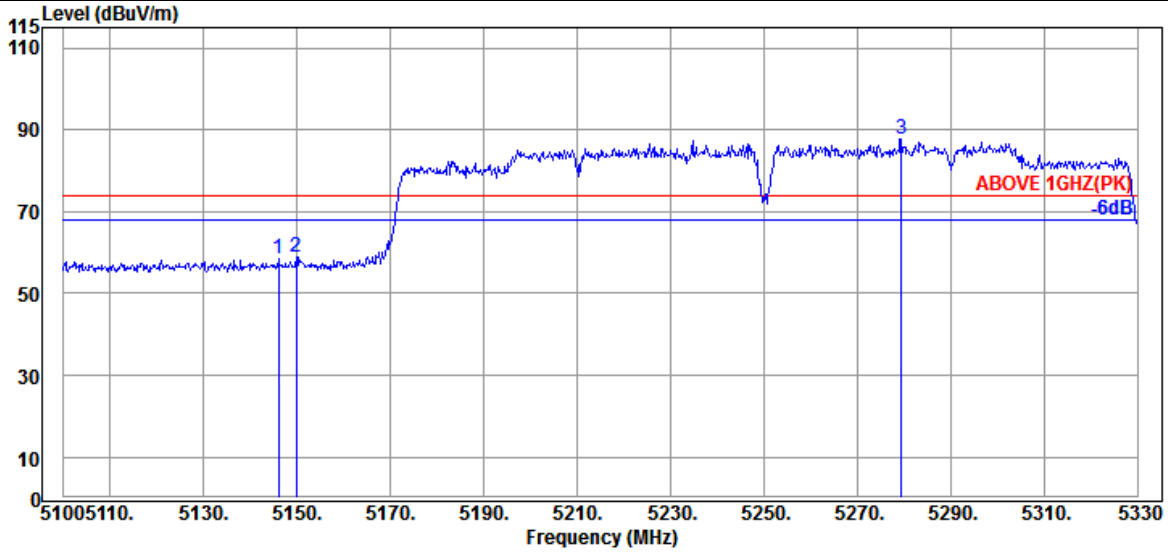

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.10	8.92	31.63	48.10	58.49	74.00	15.51	Peak
5149.910	33.10	8.92	31.63	48.64	59.03	74.00	14.97	Peak
@ 5279.400	33.17	9.04	31.63	77.03	87.61	---	---	Peak

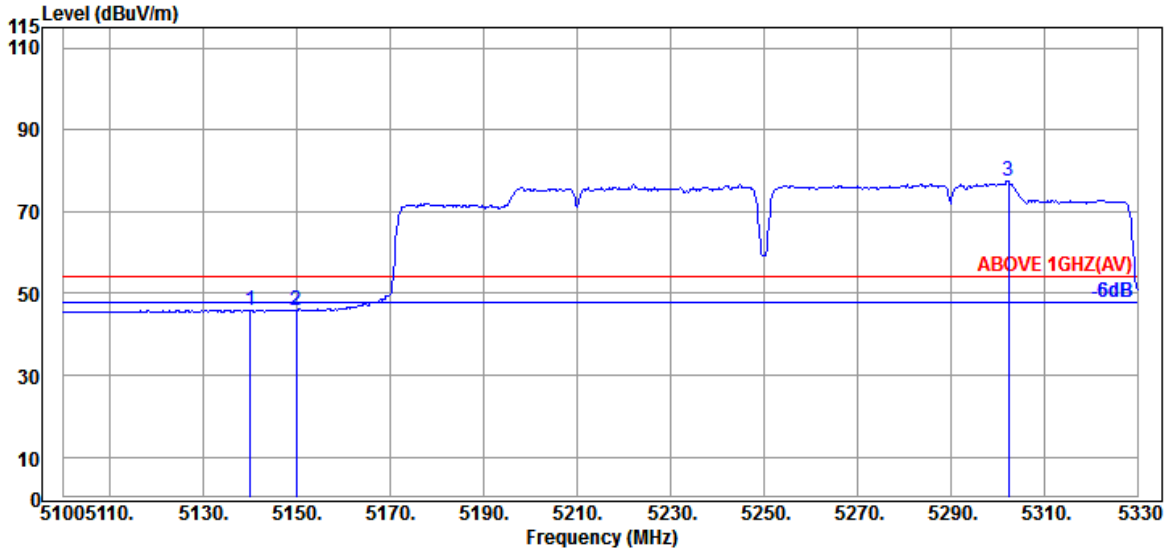


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.020	33.07	8.92	31.63	35.64	46.00	54.00	8.00	Average
5149.910	33.10	8.92	31.63	35.36	45.75	54.00	8.25	Average
@ 5302.400	33.20	9.05	31.63	66.89	77.51	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

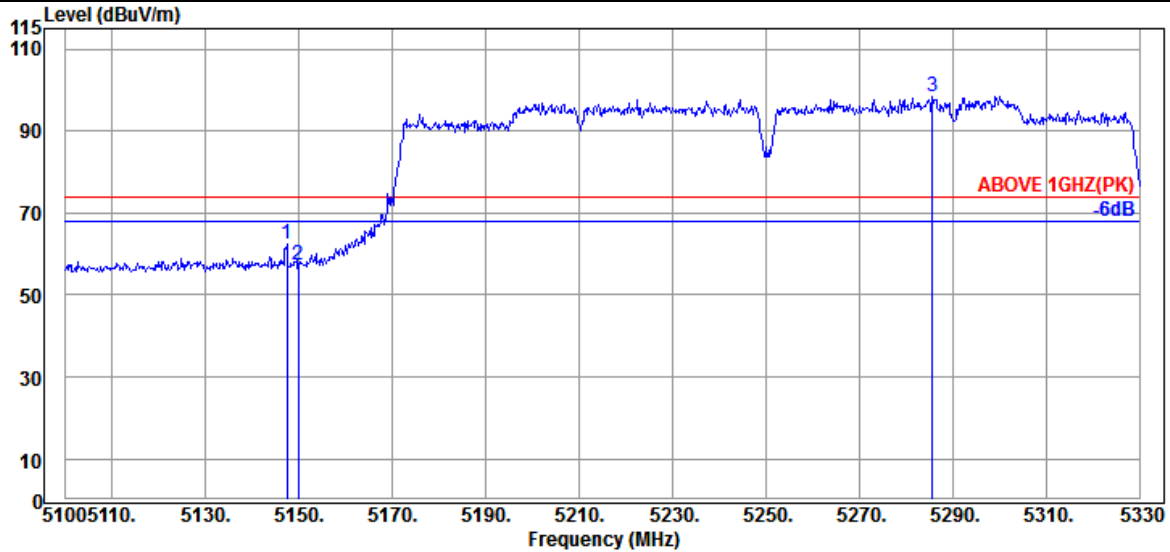

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.380	33.10	8.92	31.63	51.91	62.30	74.00	11.70	Peak
5149.910	33.10	8.92	31.63	46.98	57.37	74.00	16.63	Peak
@ 5285.610	33.17	9.04	31.63	87.74	98.32	---	---	Peak

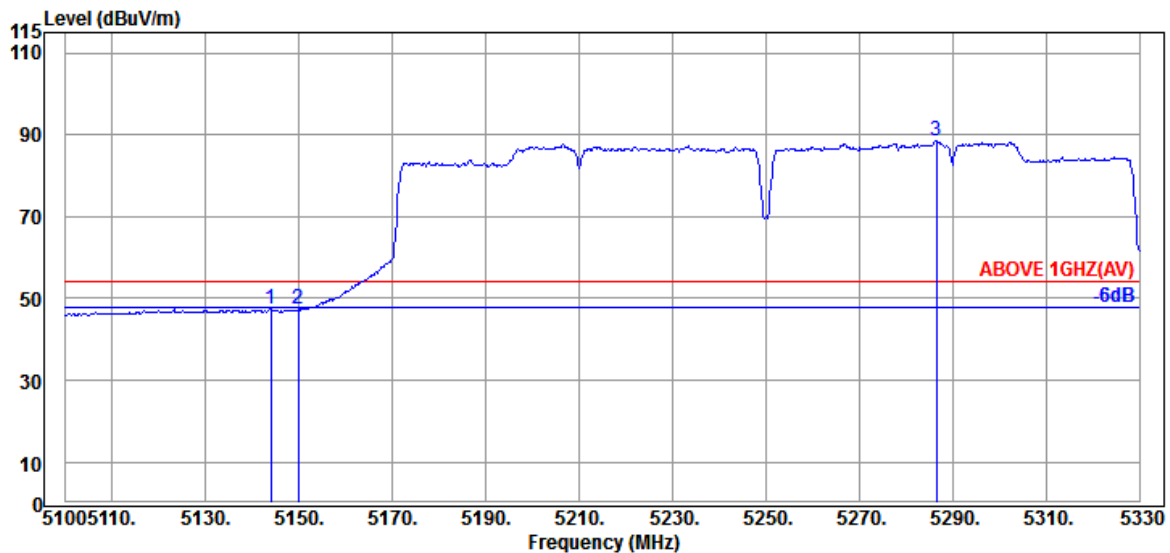


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.930	33.10	8.92	31.63	37.14	47.53	54.00	6.47	Average
5149.910	33.10	8.92	31.63	36.95	47.34	54.00	6.66	Average
@ 5286.530	33.17	9.04	31.63	78.07	88.65	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

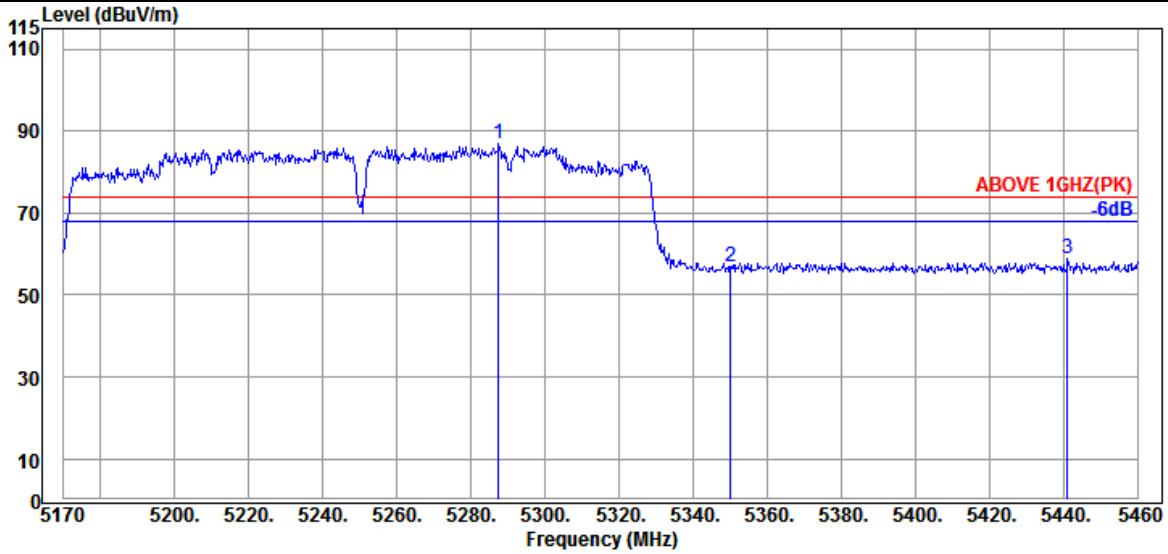

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.450	33.17	9.04	31.63	76.18	86.76	---	---	Peak
5350.090	33.50	9.10	31.63	46.08	57.05	74.00	16.95	Peak
5441.150	33.85	9.17	31.63	47.44	58.83	74.00	15.17	Peak

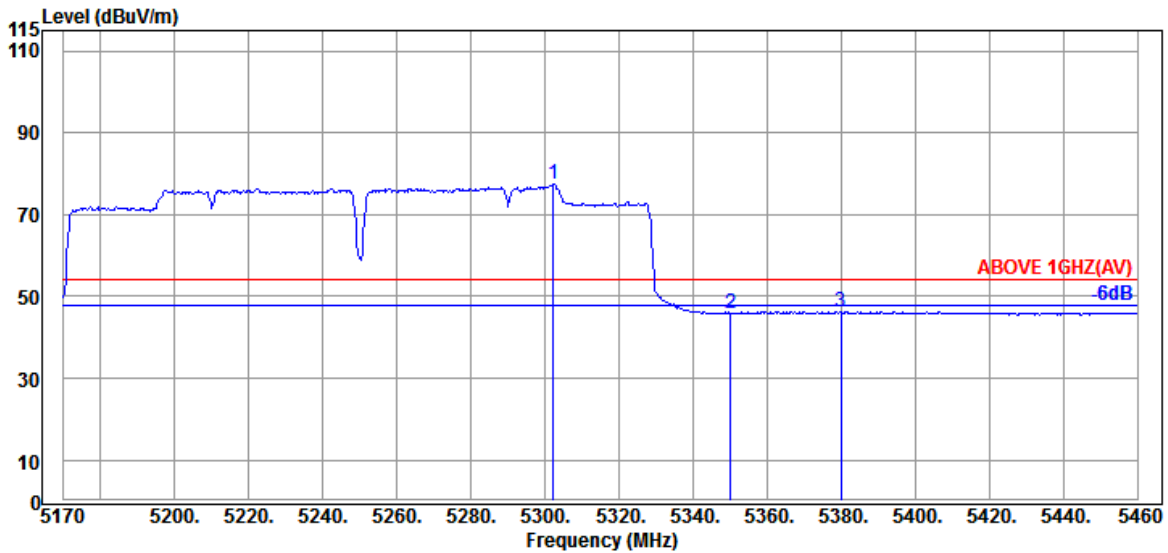


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	33.20	9.05	31.63	66.79	77.41	---	---	Average
5350.090	33.50	9.10	31.63	34.89	45.86	54.00	8.14	Average
5379.960	33.63	9.13	31.63	35.16	46.29	54.00	7.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

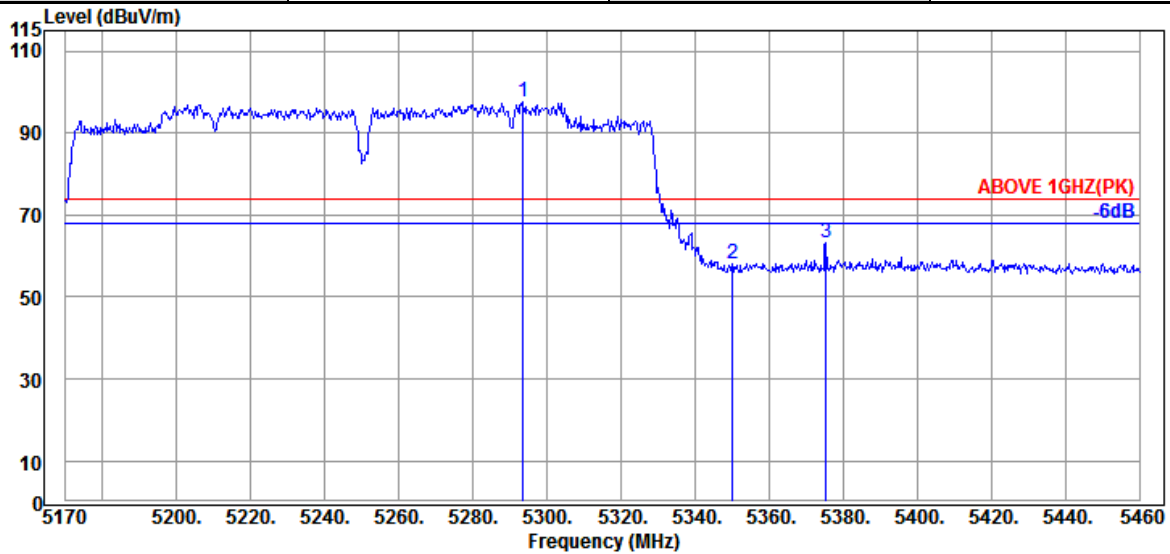

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.540	33.20	9.05	31.63	87.15	97.77	---	---	Peak
5350.090	33.50	9.10	31.63	47.13	58.10	74.00	15.90	Peak
5375.320	33.63	9.11	31.63	51.97	63.08	74.00	10.92	Peak

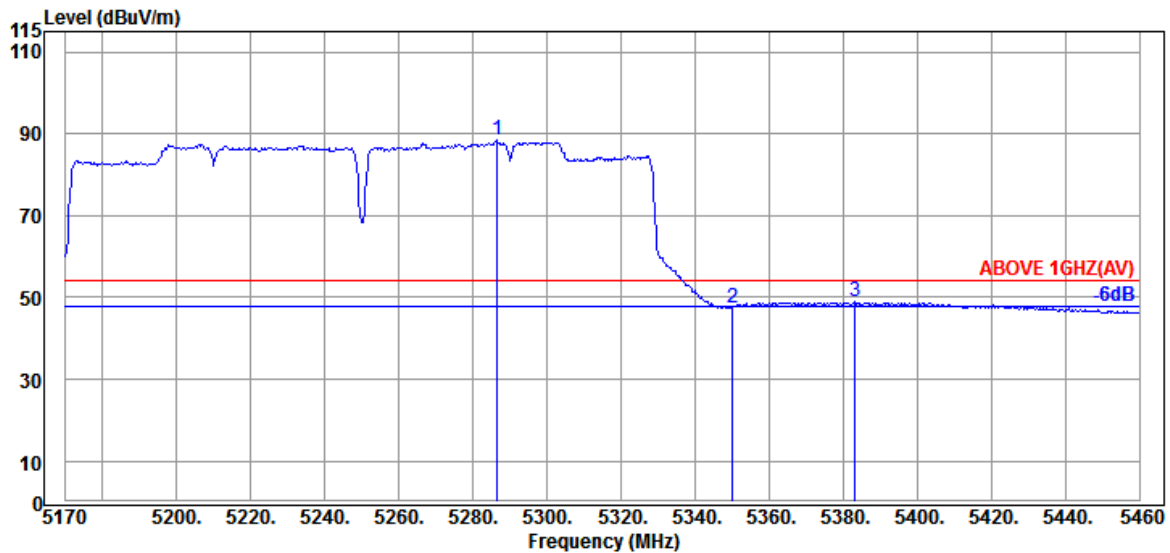


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.580	33.17	9.04	31.63	77.94	88.52	---	---	Average
5350.090	33.50	9.10	31.63	36.64	47.61	54.00	6.39	Average
5383.150	33.63	9.13	31.63	37.69	48.82	54.00	5.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

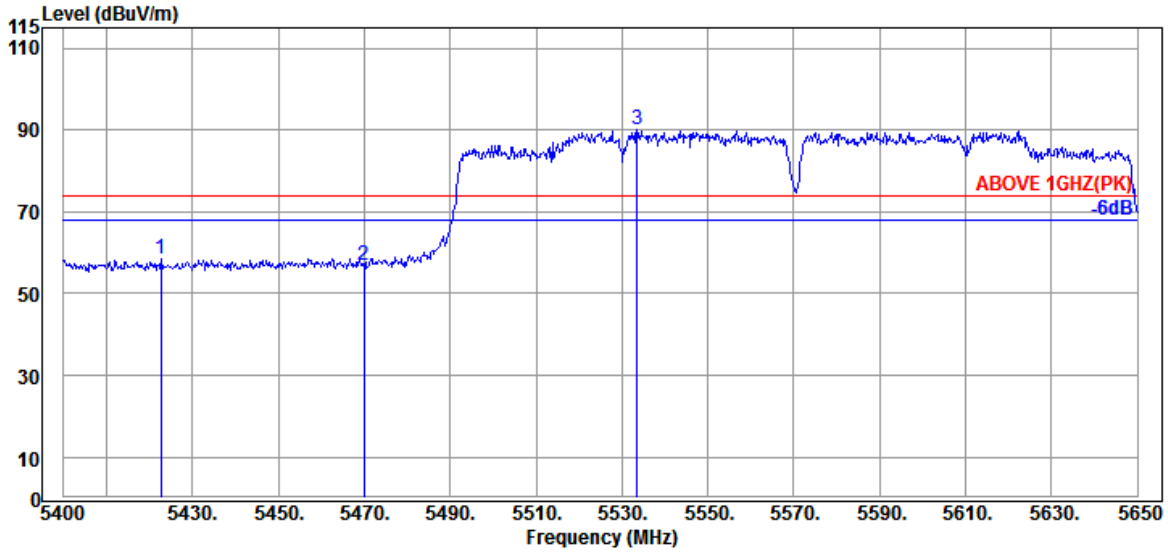

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.750	33.80	9.15	31.63	47.28	58.60	74.00	15.40	Peak
5470.000	33.97	9.20	31.63	45.55	57.09	74.00	16.91	Peak
@ 5533.500	34.17	9.26	31.65	78.19	89.97	---	---	Peak

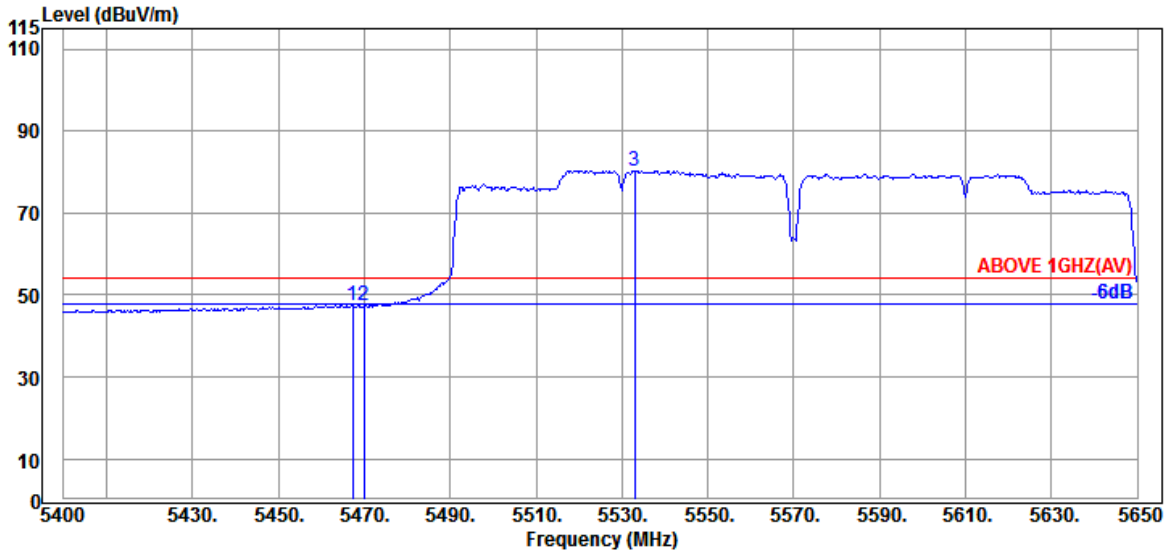


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	33.97	9.20	31.63	35.81	47.35	54.00	6.65	Average
5470.000	33.97	9.20	31.63	35.77	47.31	54.00	6.69	Average
@ 5533.000	34.17	9.26	31.65	68.59	80.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

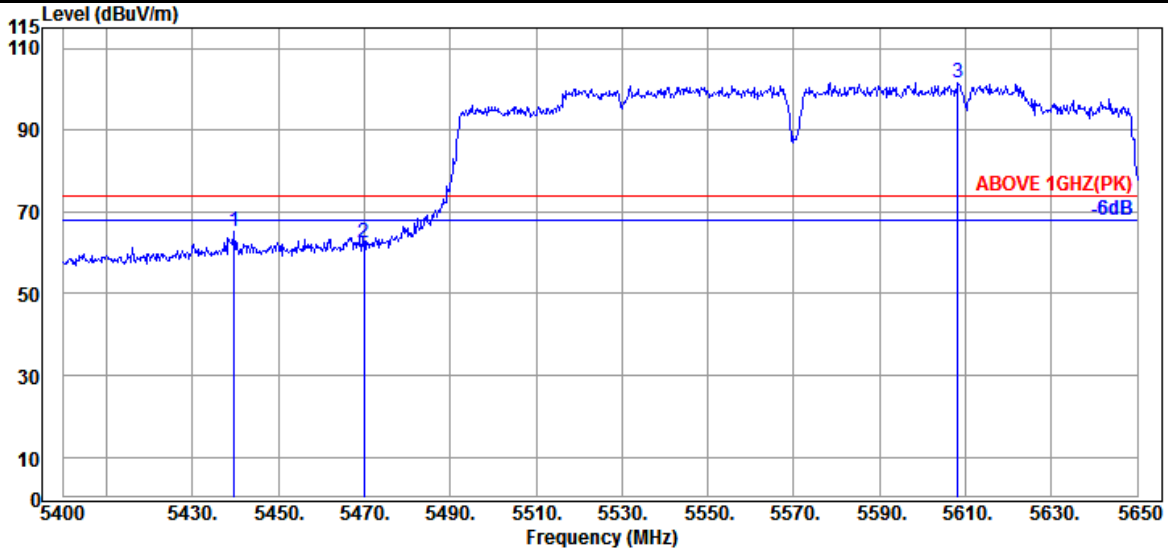

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.750	33.85	9.17	31.63	53.79	65.18	74.00	8.82	Peak
5470.000	33.97	9.20	31.63	50.81	62.35	74.00	11.65	Peak
@ 5608.250	34.23	9.31	31.68	89.80	101.66	---	---	Peak

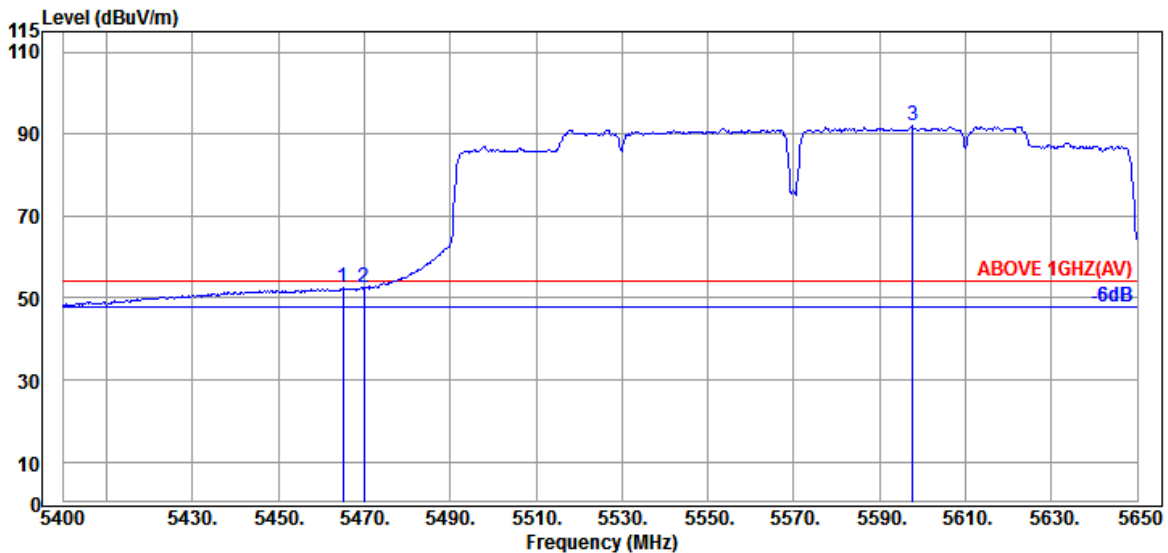


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	33.97	9.20	31.63	40.92	52.46	54.00	1.54	Average
5470.000	33.97	9.20	31.63	40.90	52.44	54.00	1.56	Average
@ 5597.750	34.20	9.30	31.68	80.23	92.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

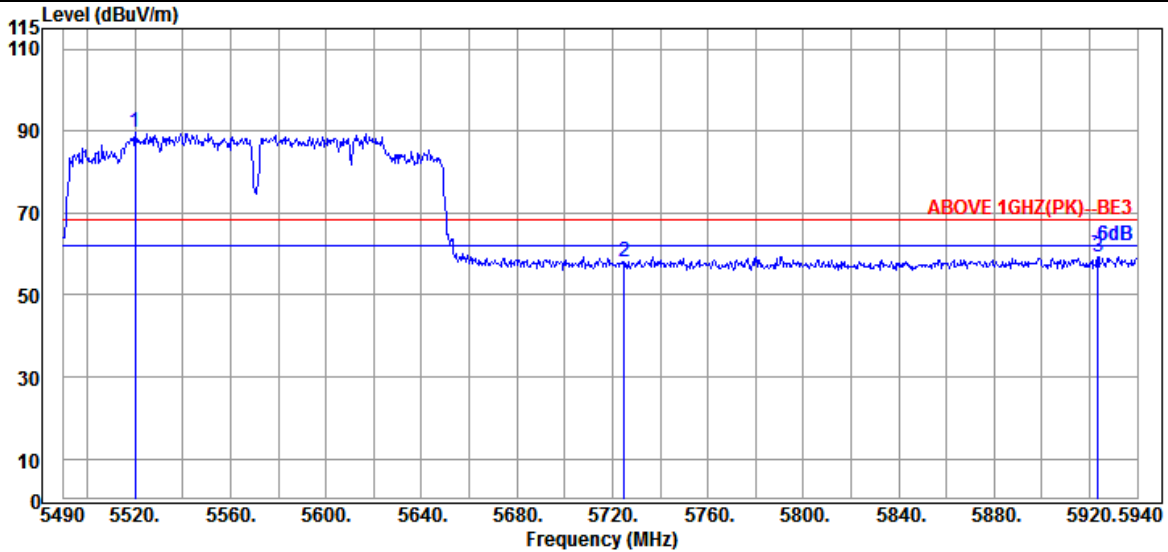

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5520.150	34.13	9.24	31.64	77.91	89.64	---	---	Peak
5724.900	34.50	9.42	31.74	45.91	58.09	68.20	10.11	Peak
5923.350	35.17	9.59	31.83	46.51	59.44	68.20	8.76	Peak

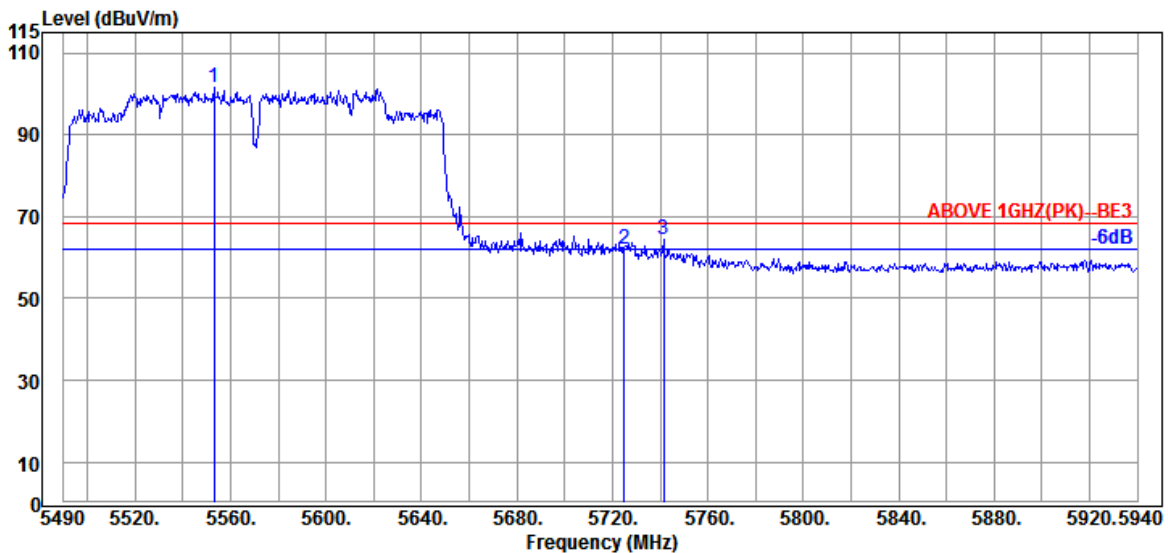


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5553.000	34.20	9.27	31.66	89.64	101.45	---	---	Peak
5724.900	34.50	9.42	31.74	49.89	62.07	68.20	6.13	Peak
5741.550	34.60	9.43	31.75	52.11	64.39	68.20	3.81	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

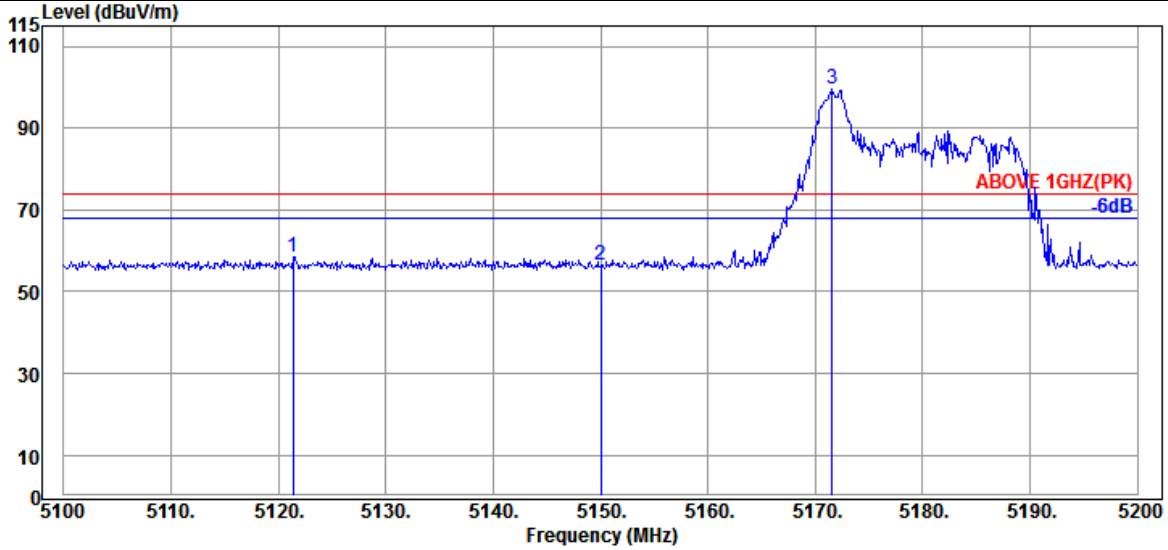

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.400	33.03	8.89	31.63	48.13	58.42	74.00	15.58	Peak
5150.000	33.10	8.92	31.63	46.22	56.61	74.00	17.39	Peak
@ 5171.600	33.17	8.94	31.63	89.25	99.73	---	---	Peak

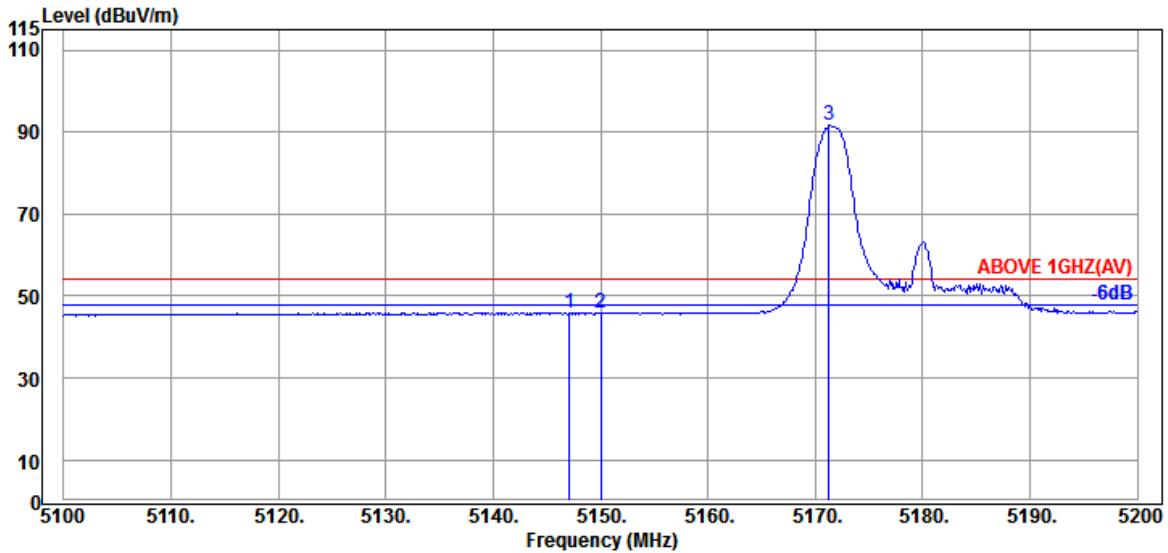


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.10	8.92	31.63	35.59	45.98	54.00	8.02	Average
5150.000	33.10	8.92	31.63	35.35	45.74	54.00	8.26	Average
@ 5171.300	33.13	8.94	31.63	81.27	91.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

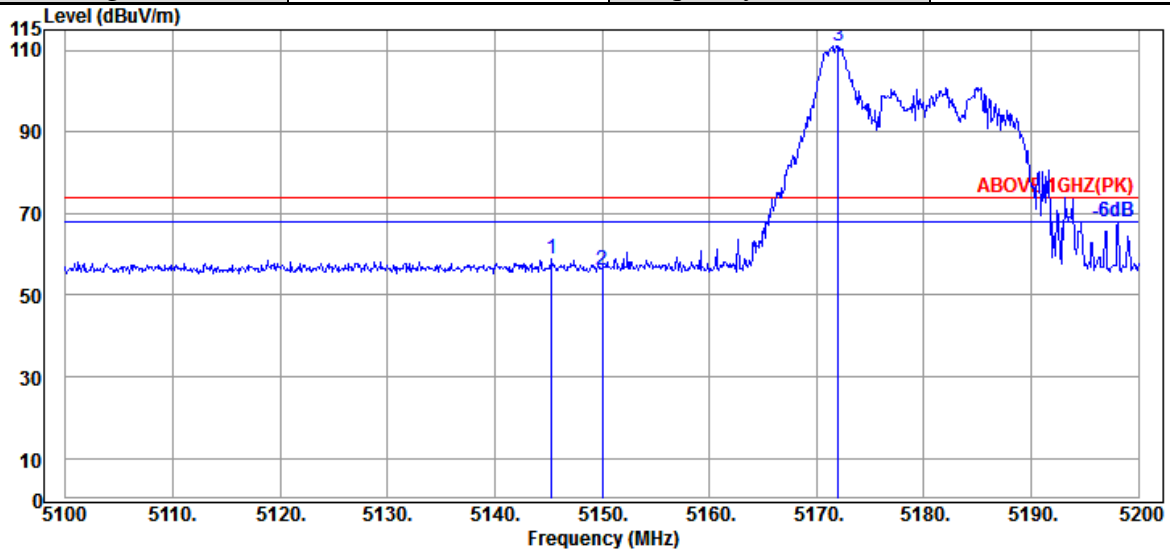

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	33.10	8.92	31.63	48.30	58.69	74.00	15.31	Peak
5150.000	33.10	8.92	31.63	45.58	55.97	74.00	18.03	Peak
@ 5172.000	33.17	8.94	31.63	100.73	111.21	---	---	Peak

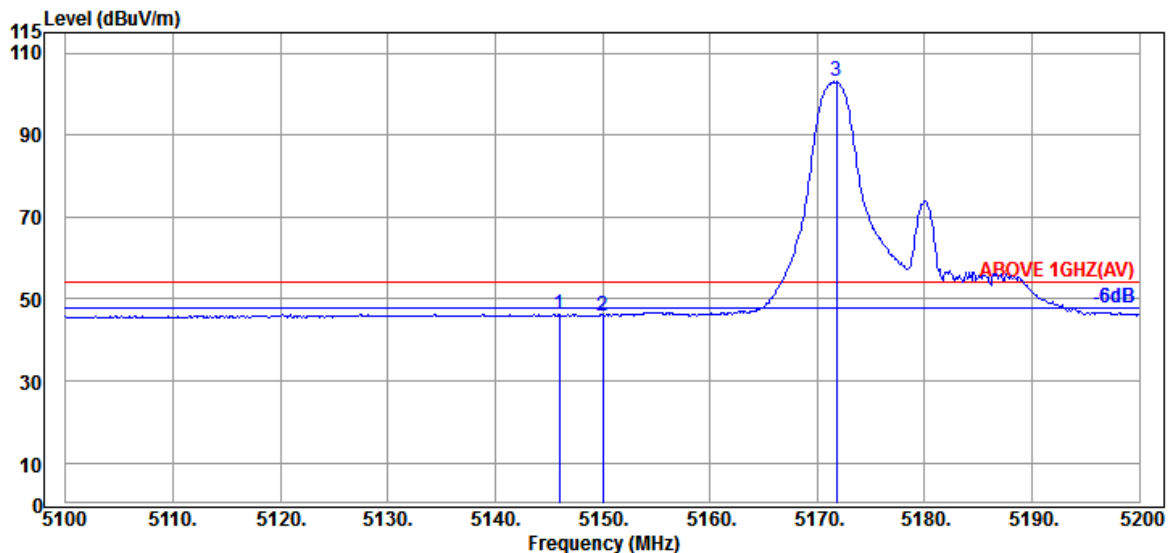


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.10	8.92	31.63	35.87	46.26	54.00	7.74	Average
5150.000	33.10	8.92	31.63	35.64	46.03	54.00	7.97	Average
@ 5171.800	33.17	8.94	31.63	92.59	103.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

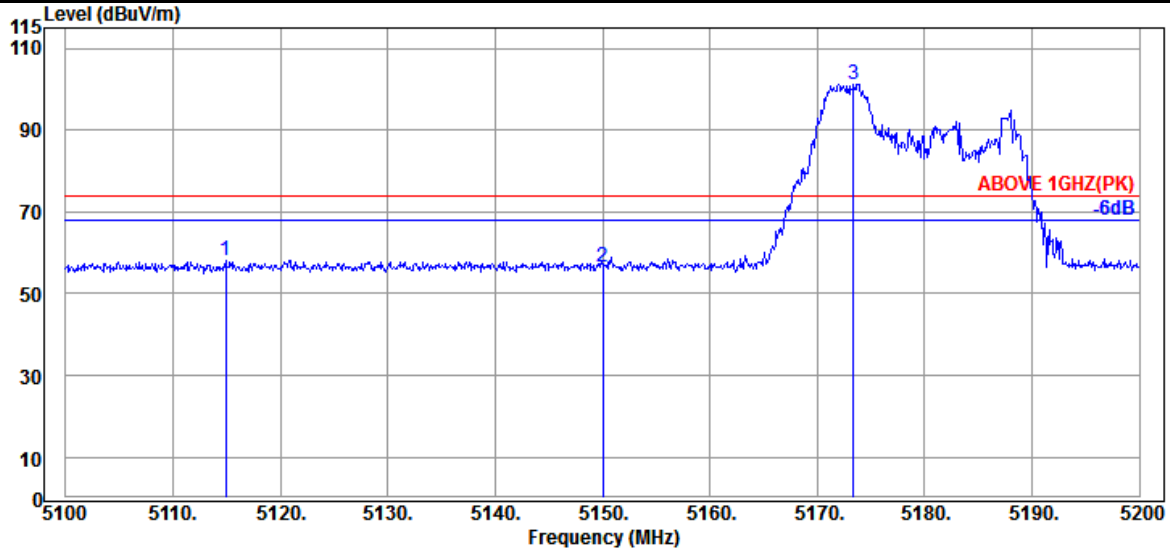

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5114.900	33.03	8.89	31.63	47.80	58.09	74.00	15.91	Peak
5150.000	33.10	8.92	31.63	45.99	56.38	74.00	17.62	Peak
@ 5173.400	33.17	8.94	31.63	90.84	101.32	---	---	Peak

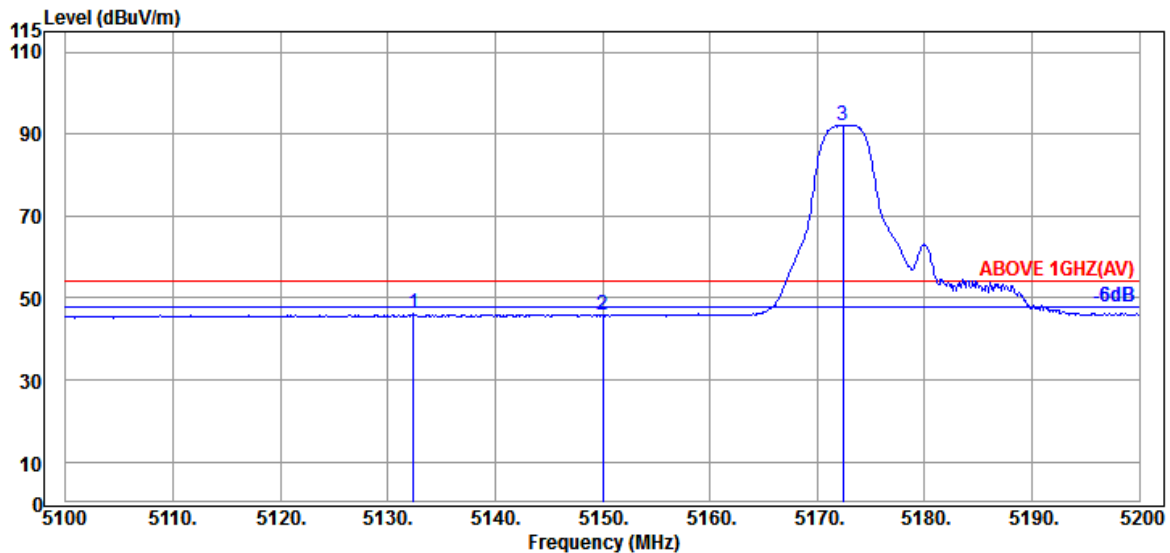


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5132.400	33.07	8.91	31.63	35.70	46.05	54.00	7.95	Average
5150.000	33.10	8.92	31.63	35.33	45.72	54.00	8.28	Average
@ 5172.400	33.17	8.94	31.63	81.77	92.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

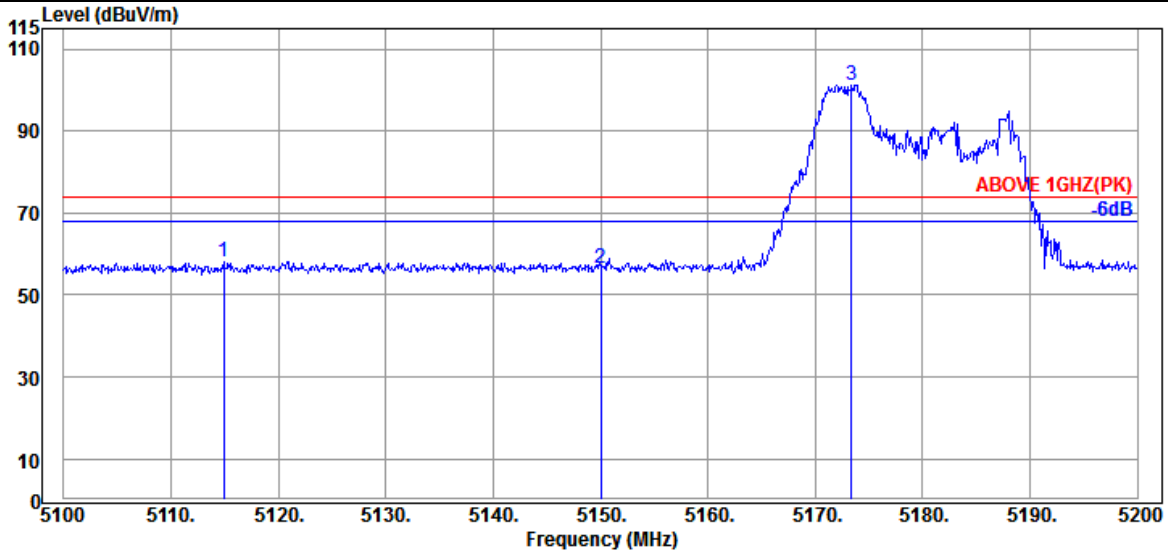

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5114.900	33.03	8.89	31.63	47.80	58.09	74.00	15.91	Peak
5150.000	33.10	8.92	31.63	45.99	56.38	74.00	17.62	Peak
@ 5173.400	33.17	8.94	31.63	90.84	101.32	---	---	Peak

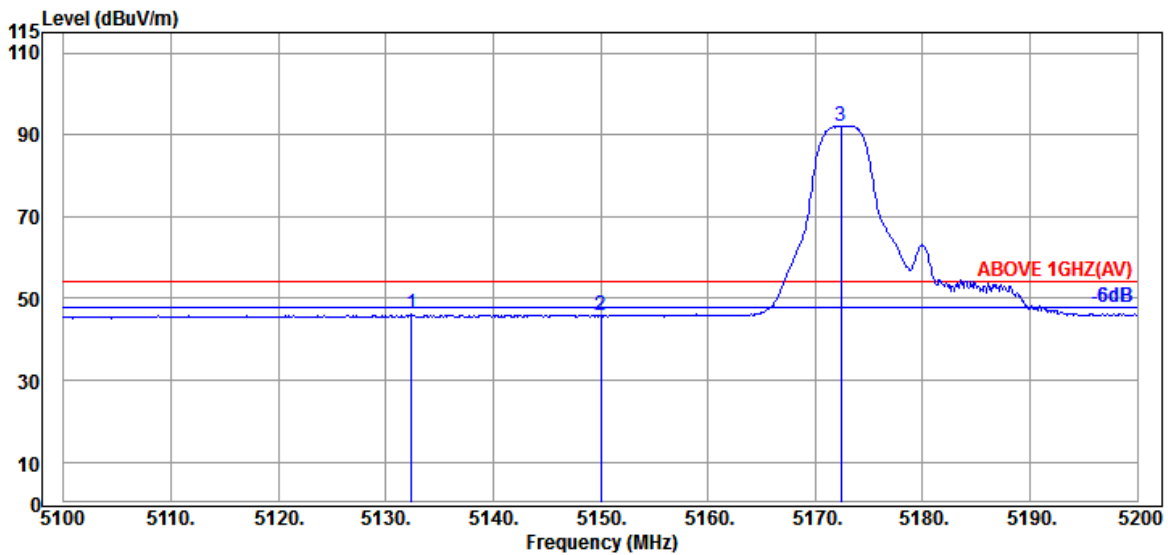


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5132.400	33.07	8.91	31.63	35.70	46.05	54.00	7.95	Average
5150.000	33.10	8.92	31.63	35.33	45.72	54.00	8.28	Average
@ 5172.400	33.17	8.94	31.63	81.77	92.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

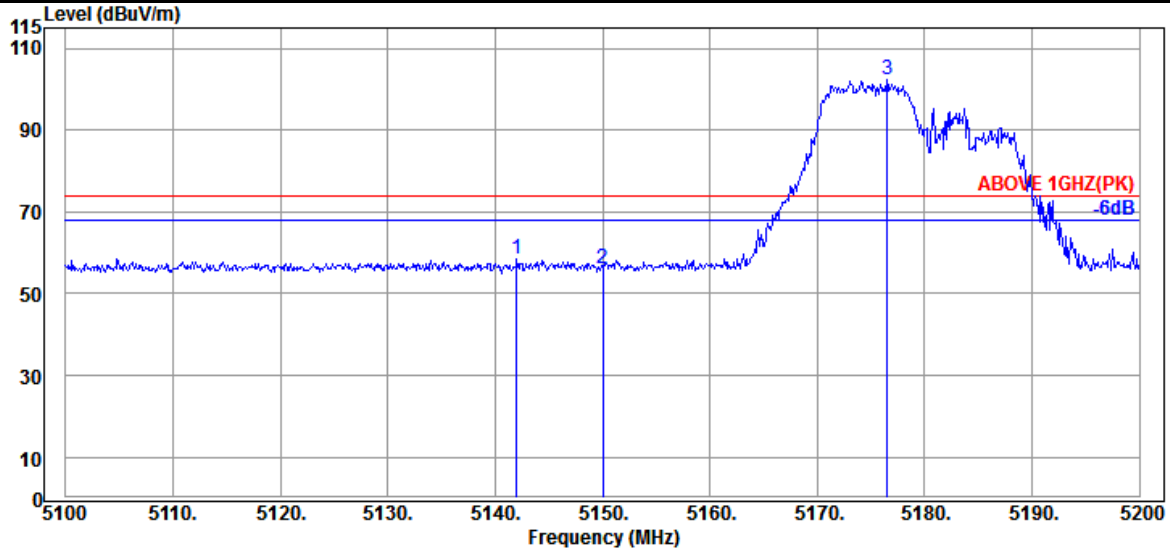

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.000	33.10	8.92	31.63	48.22	58.61	74.00	15.39	Peak
5150.000	33.10	8.92	31.63	45.84	56.23	74.00	17.77	Peak
@ 5176.500	33.17	8.95	31.63	91.74	102.23	---	---	Peak

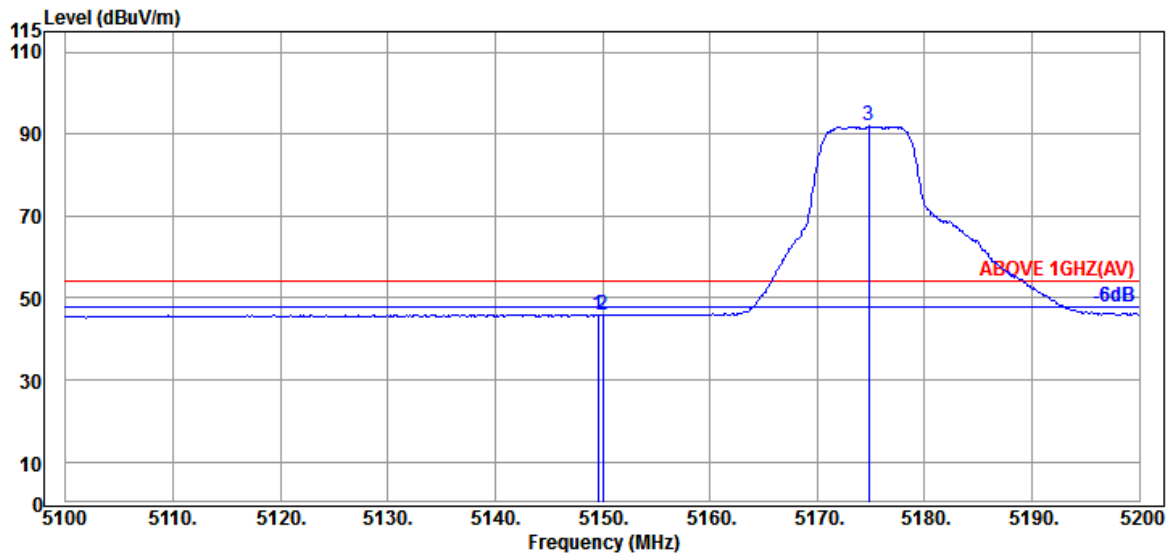


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.10	8.92	31.63	35.58	45.97	54.00	8.03	Average
5150.000	33.10	8.92	31.63	35.42	45.81	54.00	8.19	Average
@ 5174.800	33.17	8.95	31.63	81.47	91.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

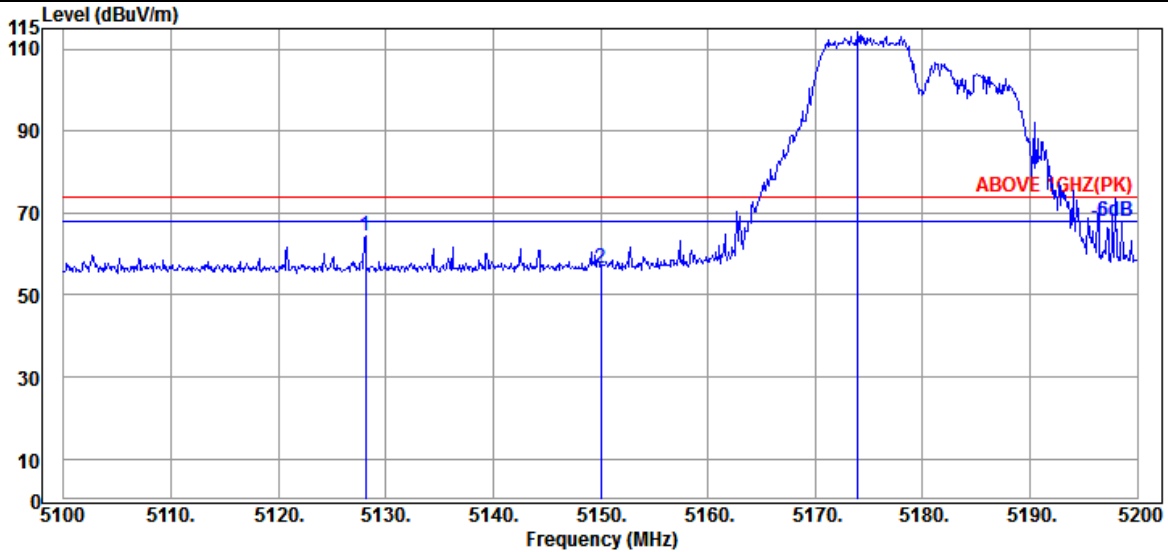

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.100	33.07	8.91	31.63	54.00	64.35	74.00	9.65	Peak
5150.000	33.10	8.92	31.63	46.07	56.46	74.00	17.54	Peak
@ 5174.000	33.17	8.95	31.63	103.53	114.02	---	---	Peak

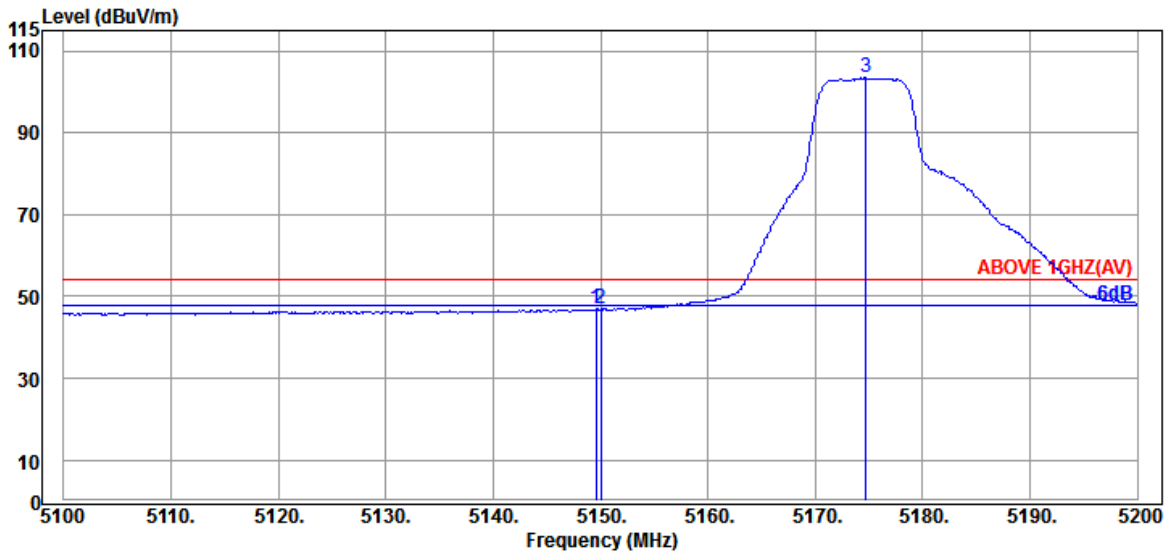


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.10	8.92	31.63	36.61	47.00	54.00	7.00	Average
5150.000	33.10	8.92	31.63	36.48	46.87	54.00	7.13	Average
@ 5174.700	33.17	8.95	31.63	92.93	103.42	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

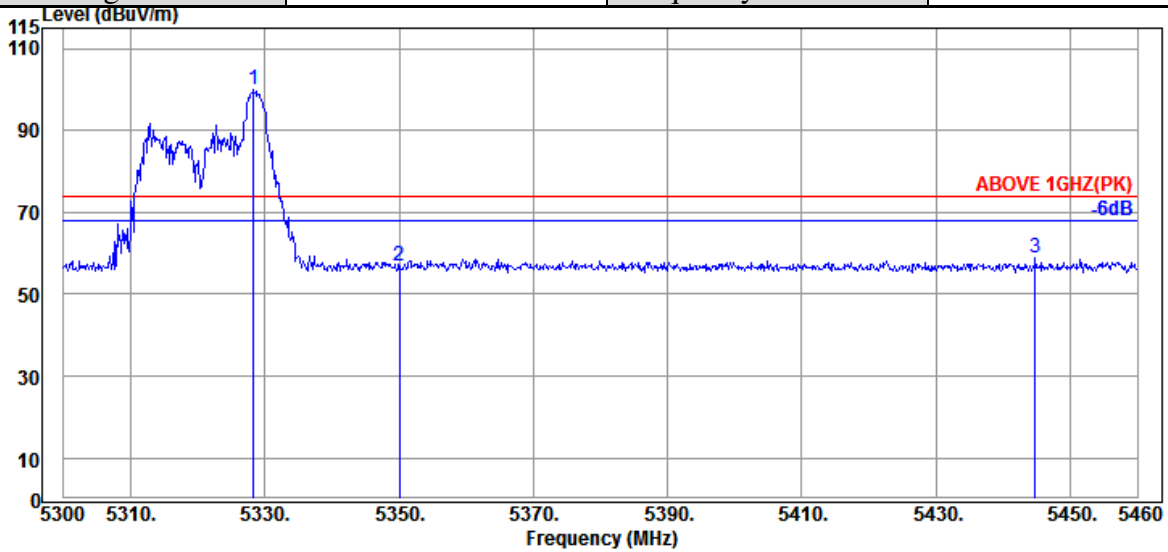

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.40	9.08	31.63	89.21	100.06	---	---	Peak
5350.080	33.50	9.10	31.63	46.10	57.07	74.00	16.93	Peak
5444.800	33.85	9.17	31.63	47.33	58.72	74.00	15.28	Peak

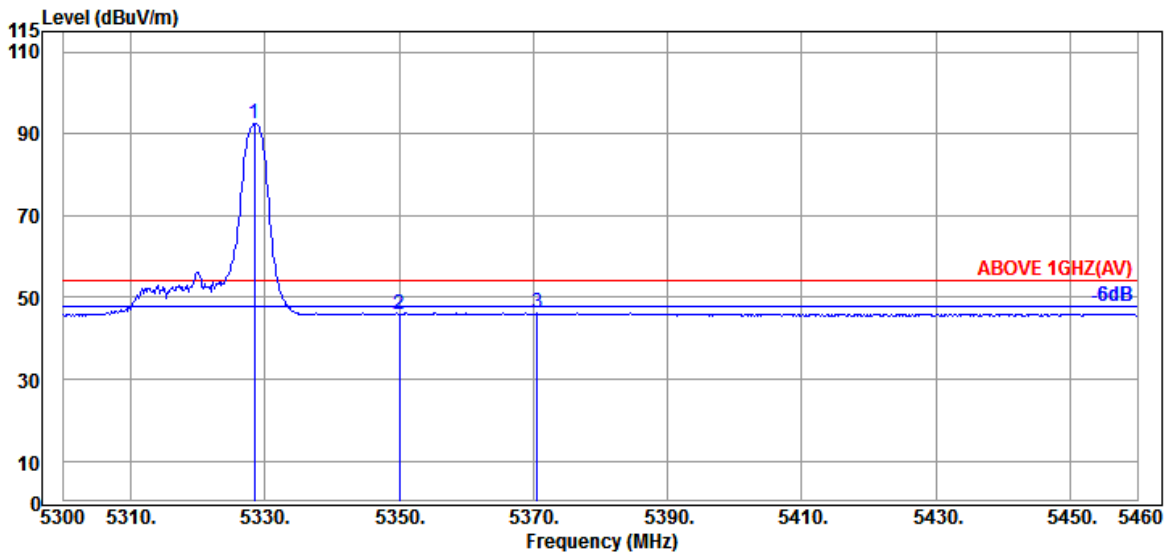


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	33.40	9.08	31.63	81.77	92.62	---	---	Average
5350.080	33.50	9.10	31.63	34.82	45.79	54.00	8.21	Average
5370.560	33.63	9.11	31.63	35.26	46.37	54.00	7.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

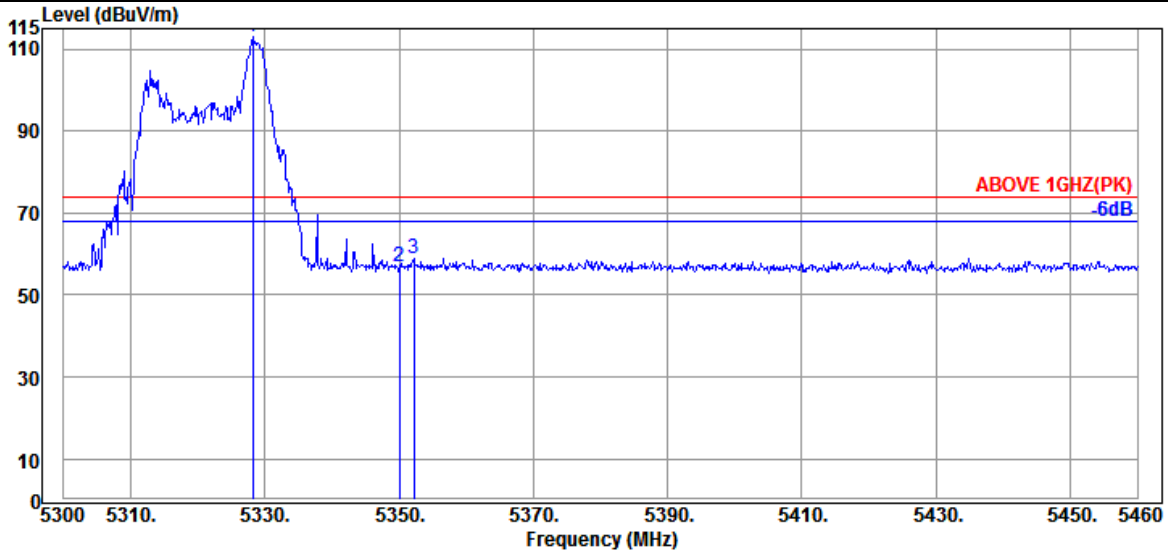

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	33.40	9.08	31.63	102.15	113.00	---	---	Peak
5350.080	33.50	9.10	31.63	45.91	56.88	74.00	17.12	Peak
5352.160	33.50	9.10	31.63	47.95	58.92	74.00	15.08	Peak

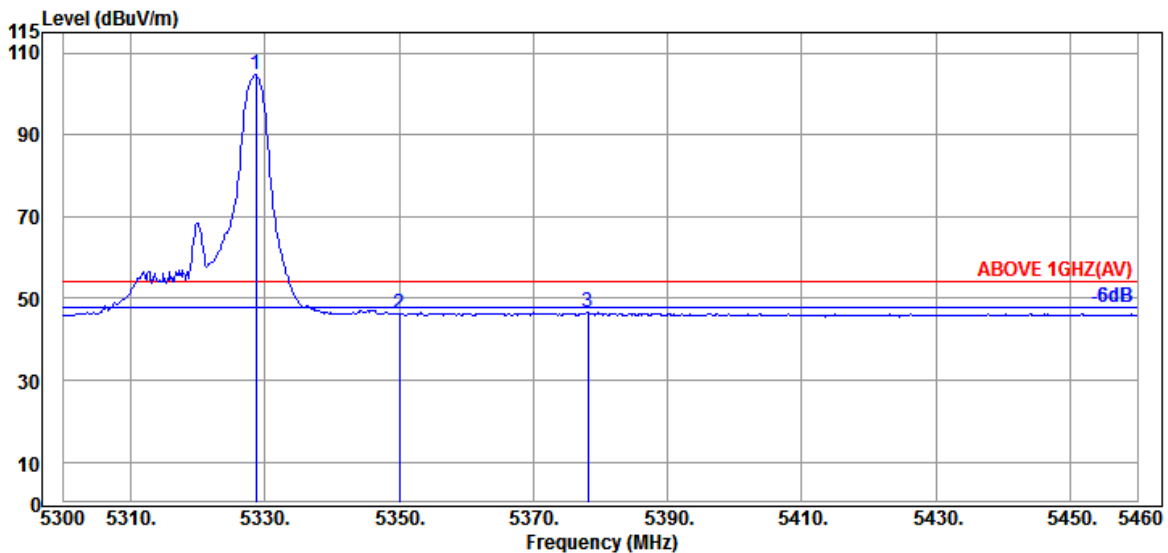


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	33.40	9.08	31.63	93.94	104.79	---	---	Average
5350.080	33.50	9.10	31.63	35.13	46.10	54.00	7.90	Average
5378.080	33.63	9.13	31.63	35.37	46.50	54.00	7.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

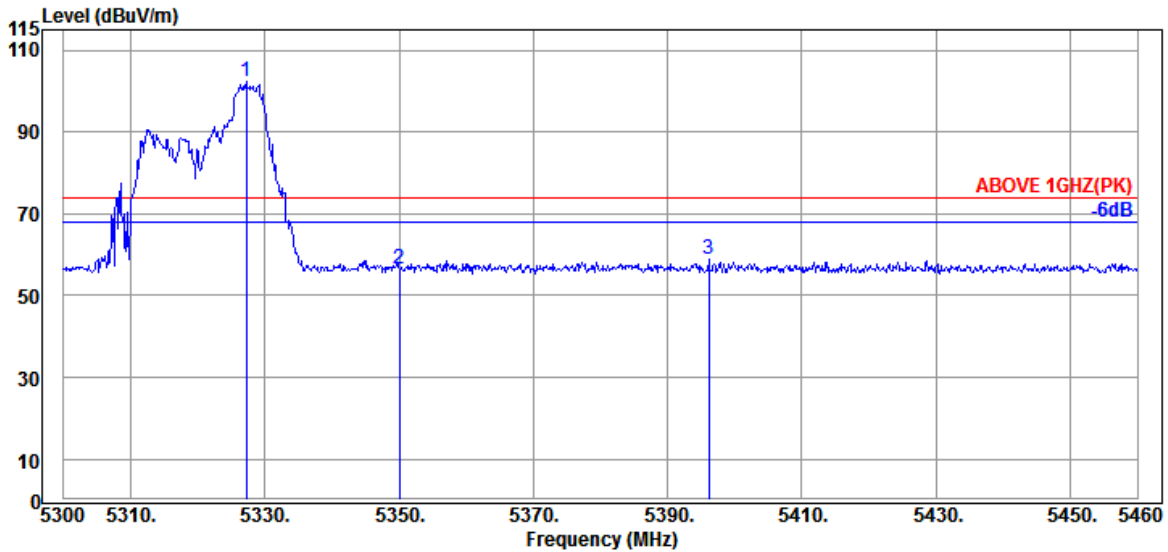

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.40	9.08	31.63	91.57	102.42	---	---	Peak
5350.080	33.50	9.10	31.63	45.68	56.65	74.00	17.35	Peak
5396.160	33.70	9.14	31.63	47.61	58.82	74.00	15.18	Peak

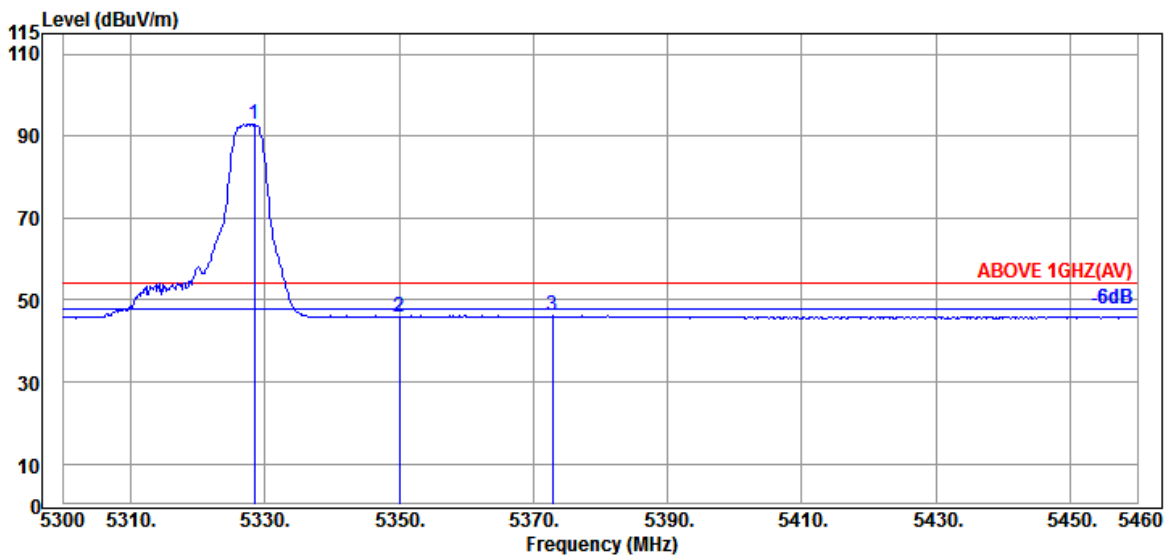


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	33.40	9.08	31.63	82.11	92.96	---	---	Average
5350.080	33.50	9.10	31.63	34.98	45.95	54.00	8.05	Average
5372.800	33.63	9.11	31.63	35.04	46.15	54.00	7.85	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

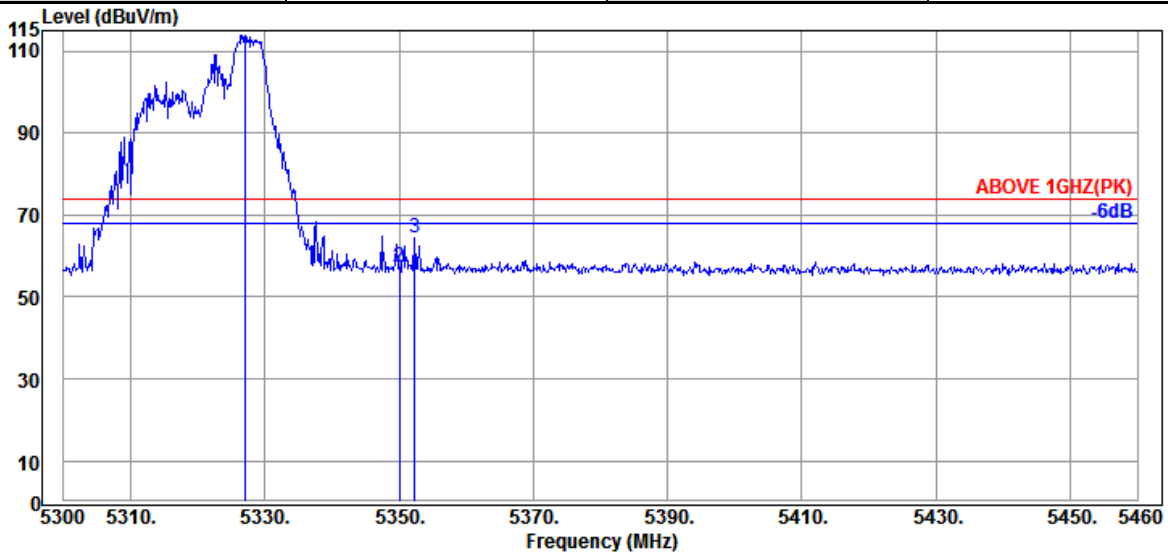

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.040	33.40	9.08	31.63	102.88	113.73	---	---	Peak
5350.080	33.50	9.10	31.63	46.30	57.27	74.00	16.73	Peak
5352.320	33.50	9.10	31.63	53.44	64.41	74.00	9.59	Peak

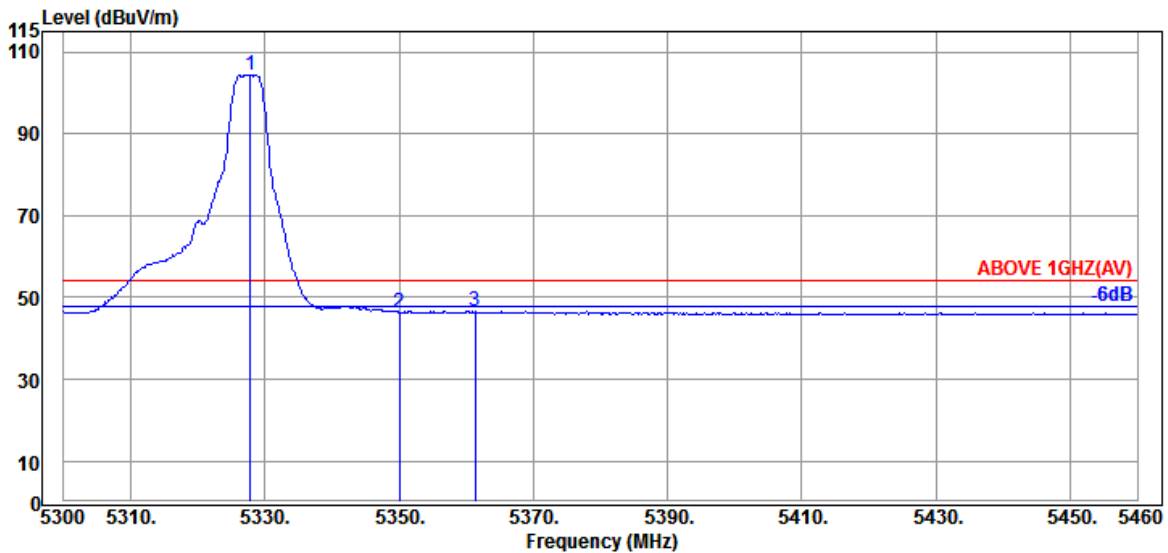


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	33.40	9.08	31.63	93.56	104.41	---	---	Average
5350.080	33.50	9.10	31.63	35.38	46.35	54.00	7.65	Average
5361.280	33.57	9.11	31.63	35.56	46.61	54.00	7.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

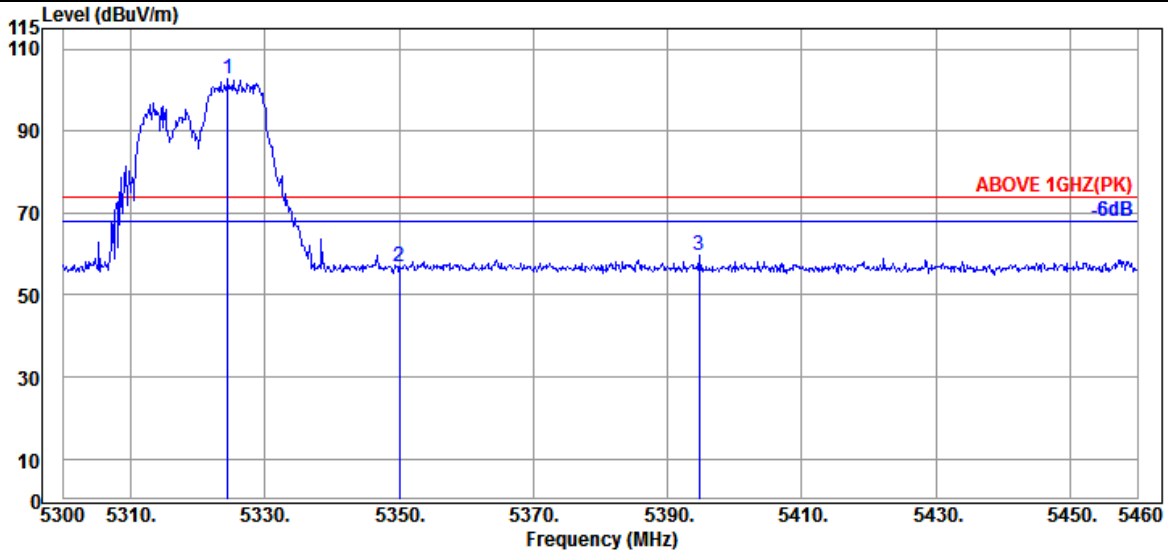

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.480	33.40	9.07	31.63	91.96	102.80	---	---	Peak
5350.080	33.50	9.10	31.63	45.77	56.74	74.00	17.26	Peak
5394.720	33.70	9.14	31.63	48.34	59.55	74.00	14.45	Peak

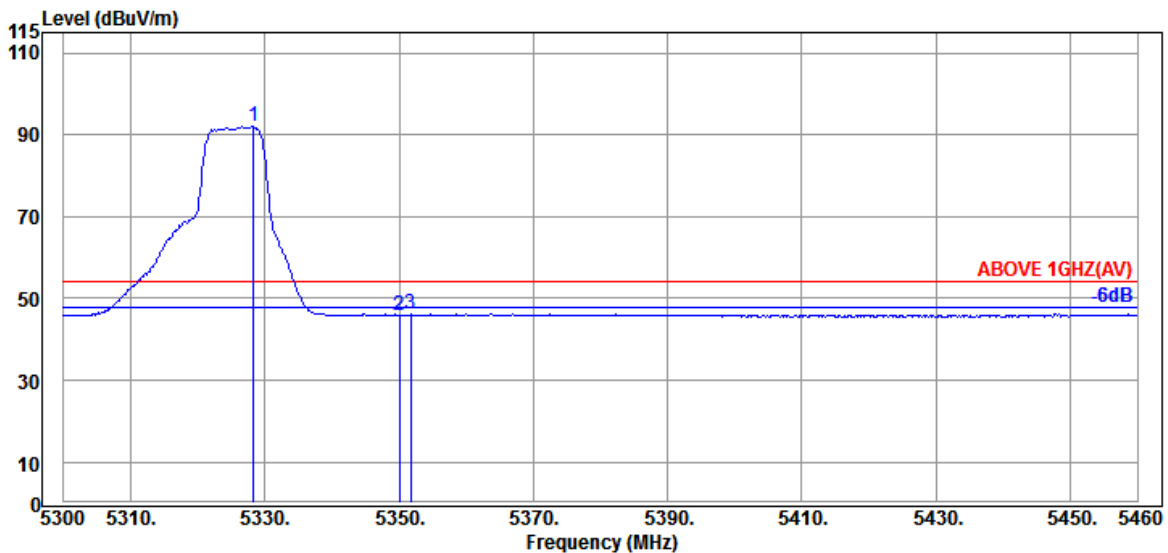


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.40	9.08	31.63	81.18	92.03	---	---	Average
5350.080	33.50	9.10	31.63	34.86	45.83	54.00	8.17	Average
5351.680	33.50	9.10	31.63	35.20	46.17	54.00	7.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

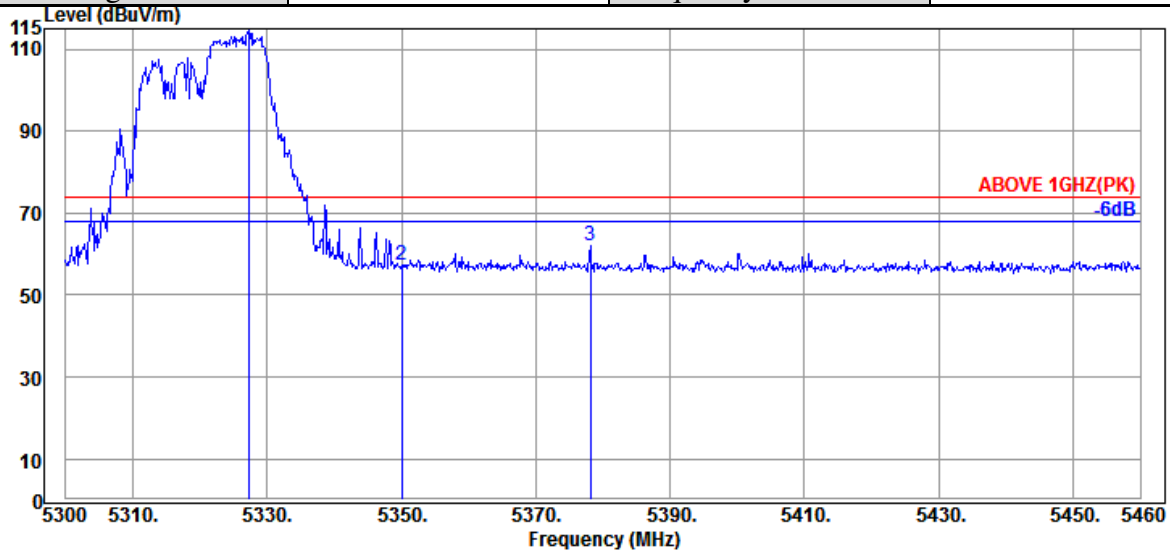

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.40	9.08	31.63	103.59	114.44	---	---	Peak
5350.080	33.50	9.10	31.63	46.18	57.15	74.00	16.85	Peak
5378.080	33.63	9.13	31.63	51.02	62.15	74.00	11.85	Peak

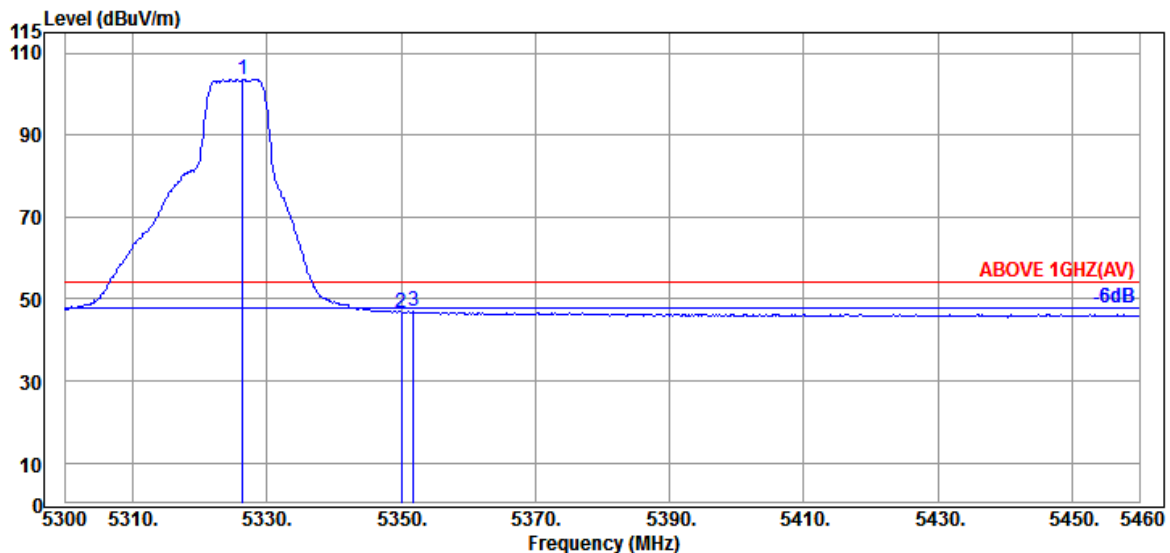


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.400	33.40	9.07	31.63	92.77	103.61	---	---	Average
5350.080	33.50	9.10	31.63	35.64	46.61	54.00	7.39	Average
5351.840	33.50	9.10	31.63	35.99	46.96	54.00	7.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

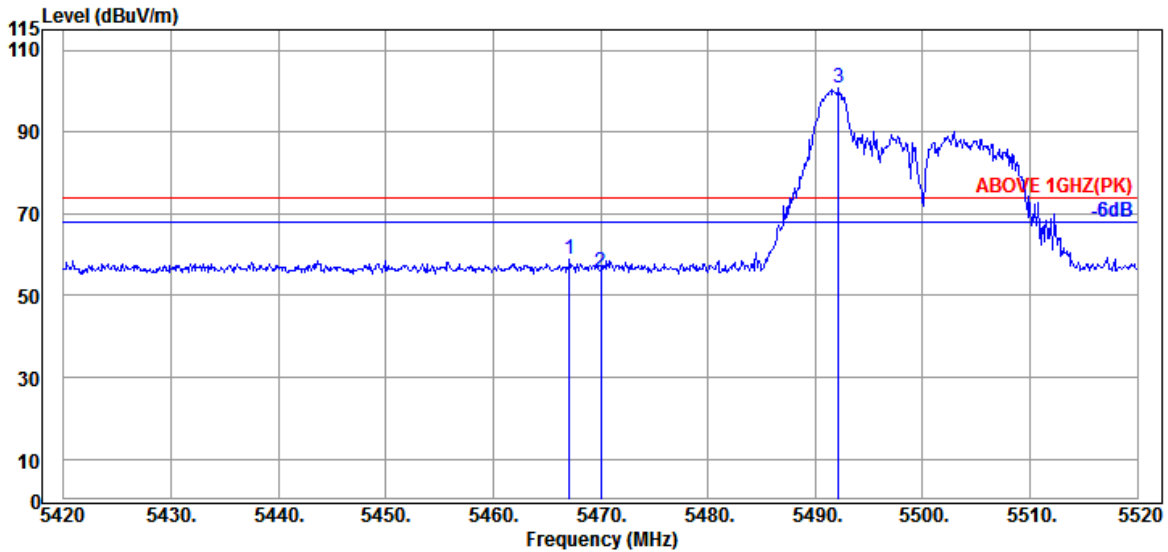

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	33.97	9.20	31.63	47.48	59.02	74.00	14.98	Peak
5470.000	33.97	9.20	31.63	44.36	55.90	74.00	18.10	Peak
@ 5492.200	34.03	9.21	31.63	89.29	100.90	---	---	Peak

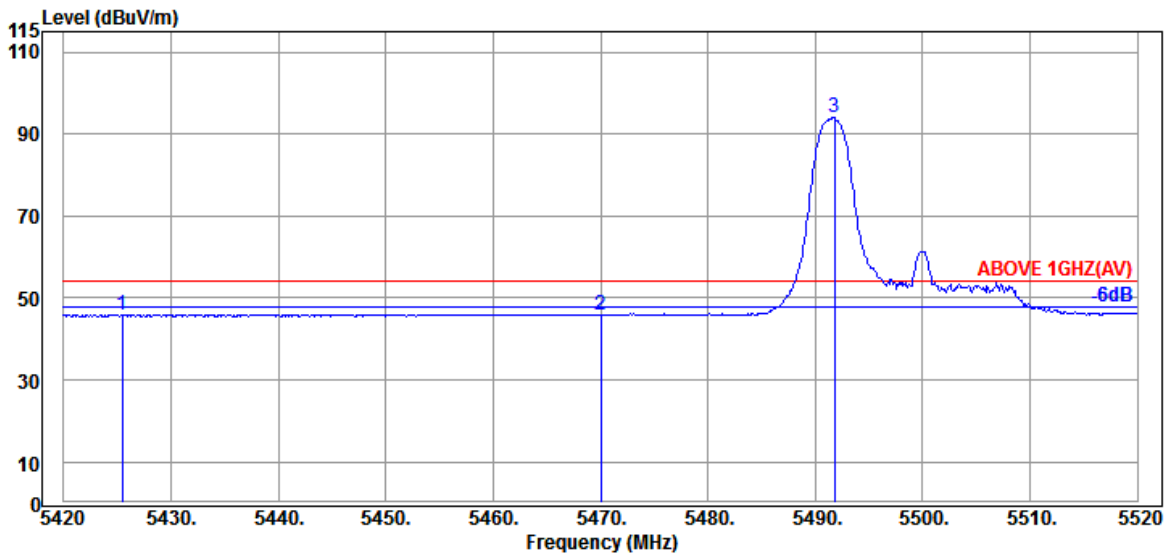


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.500	33.80	9.15	31.63	34.68	46.00	54.00	8.00	Average
5470.000	33.97	9.20	31.63	34.34	45.88	54.00	8.12	Average
@ 5491.800	34.03	9.21	31.63	82.38	93.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

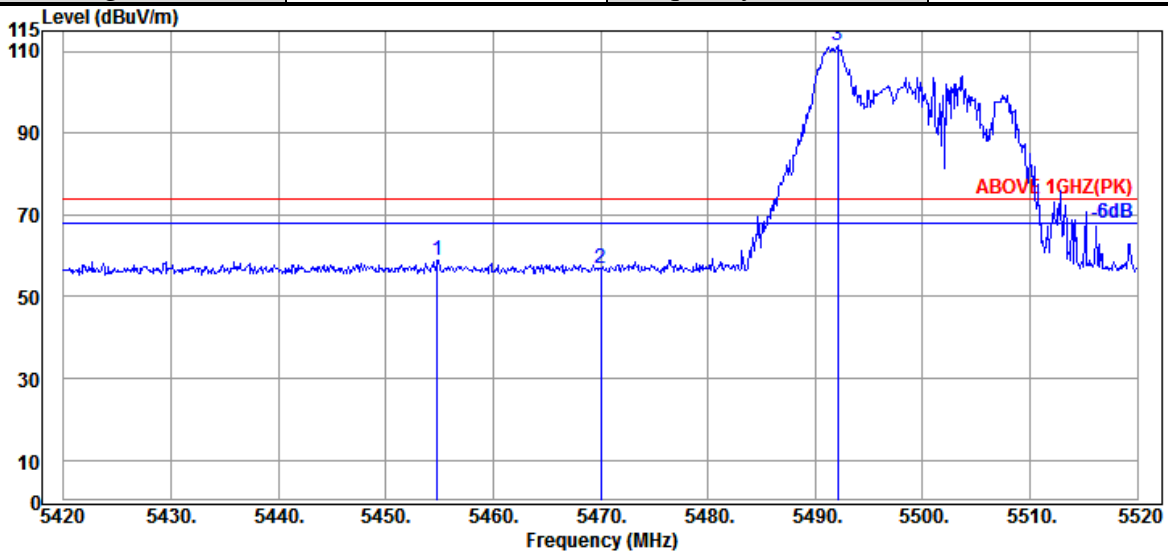

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.800	33.90	9.18	31.63	47.60	59.05	74.00	14.95	Peak
5470.000	33.97	9.20	31.63	45.39	56.93	74.00	17.07	Peak
@ 5492.100	34.03	9.21	31.63	99.83	111.44	---	---	Peak

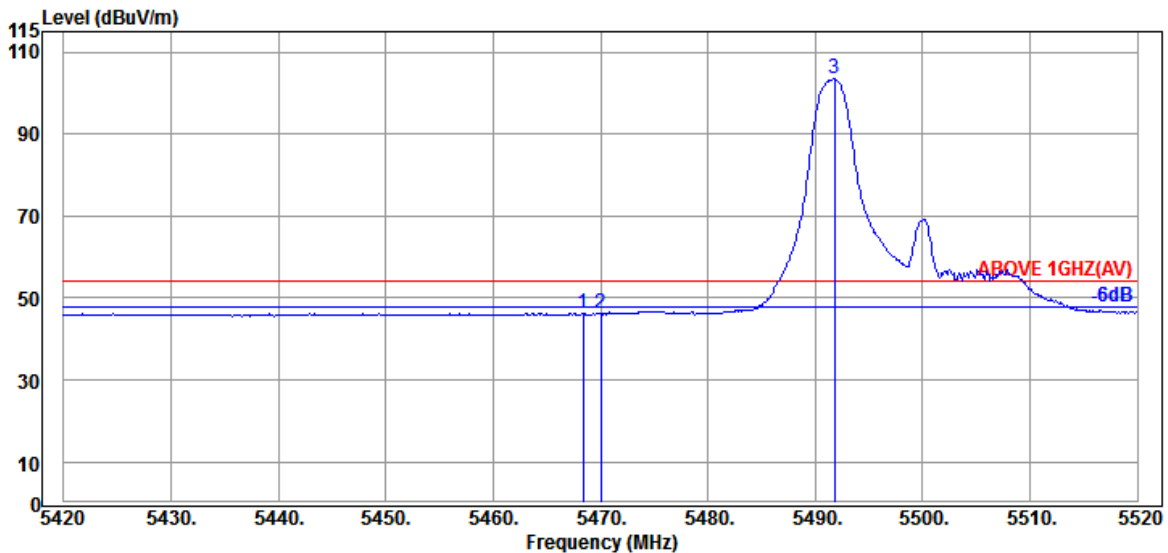


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	33.97	9.20	31.63	34.76	46.30	54.00	7.70	Average
5470.000	33.97	9.20	31.63	34.55	46.09	54.00	7.91	Average
@ 5491.800	34.03	9.21	31.63	91.82	103.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

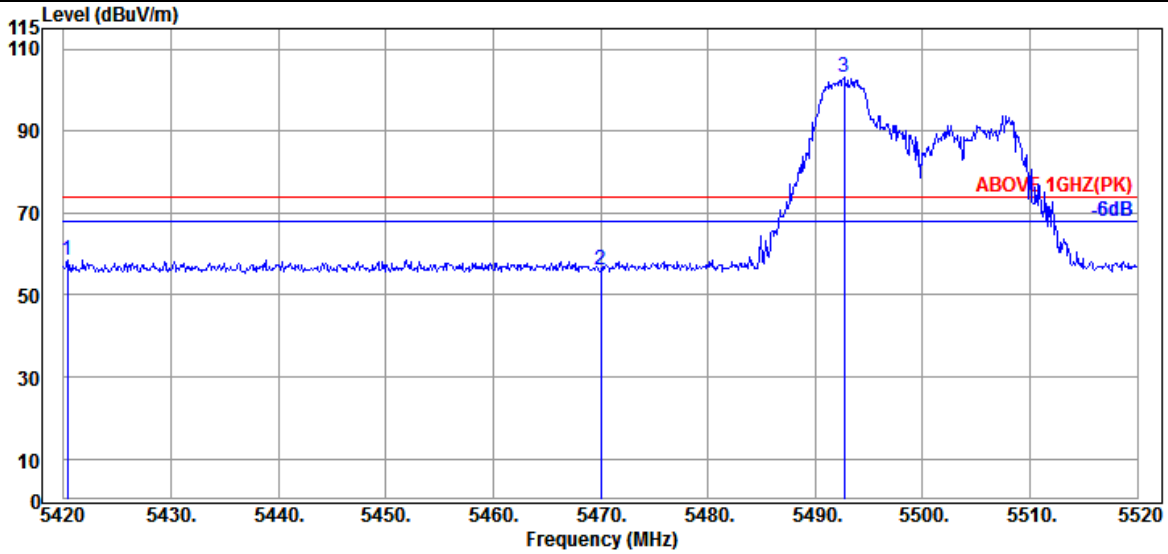

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.400	33.80	9.15	31.63	47.32	58.64	74.00	15.36	Peak
5470.000	33.97	9.20	31.63	44.68	56.22	74.00	17.78	Peak
@ 5492.700	34.03	9.21	31.63	91.47	103.08	---	---	Peak

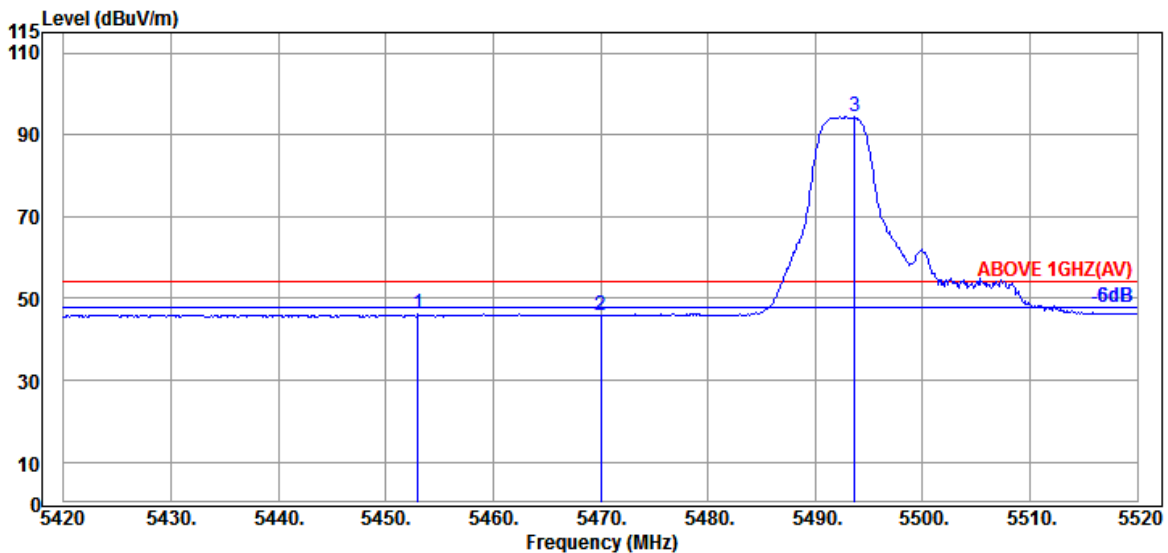


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.000	33.90	9.18	31.63	34.62	46.07	54.00	7.93	Average
5470.000	33.97	9.20	31.63	34.27	45.81	54.00	8.19	Average
@ 5493.700	34.03	9.21	31.63	82.76	94.37	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

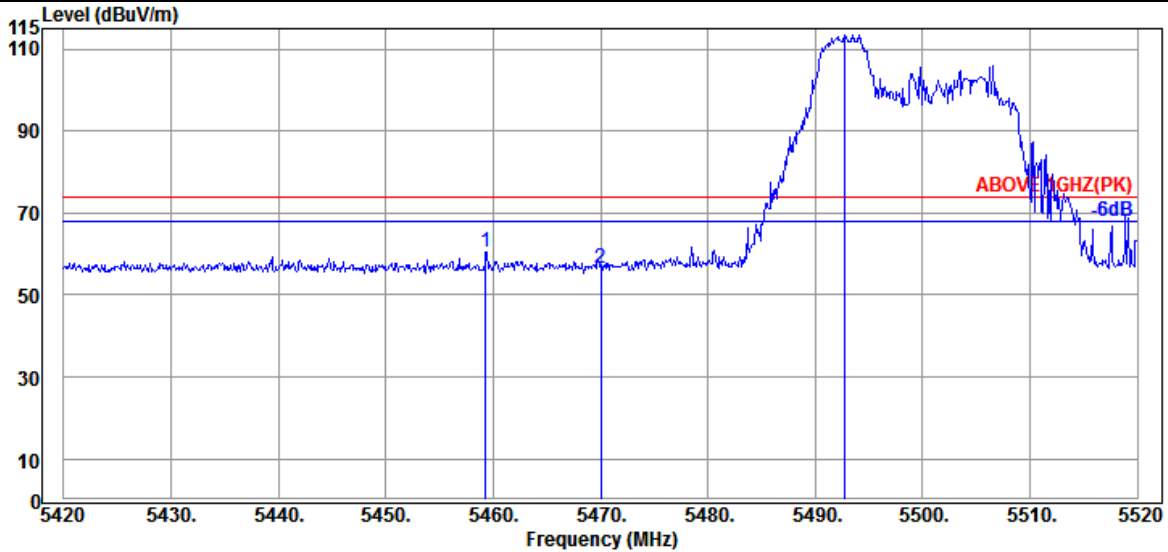

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	33.90	9.18	31.63	48.88	60.33	74.00	13.67	Peak
5470.000	33.97	9.20	31.63	45.16	56.70	74.00	17.30	Peak
@ 5492.700	34.03	9.21	31.63	101.96	113.57	---	---	Peak

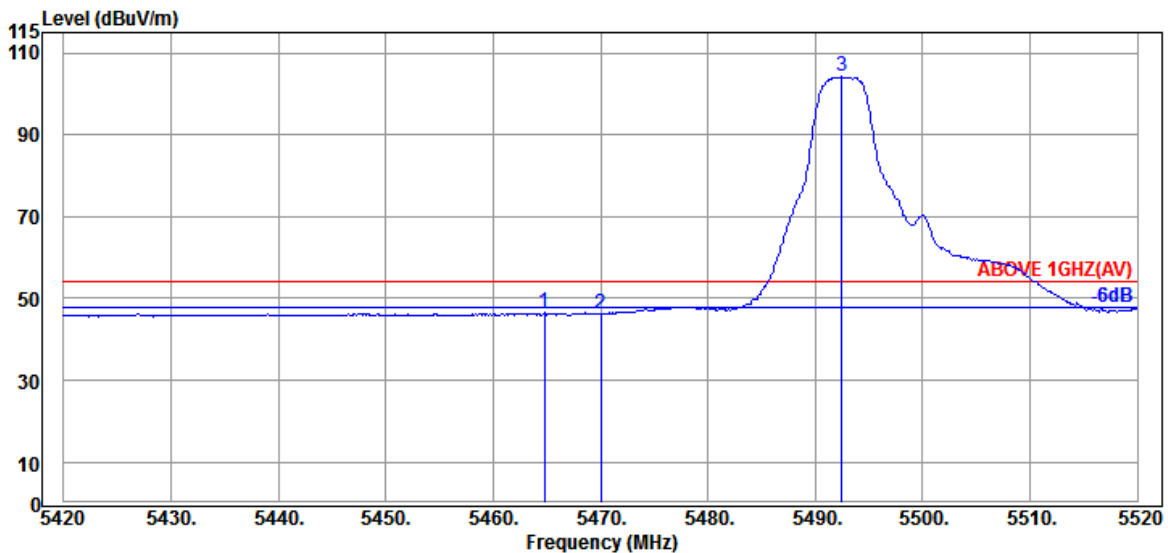


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.800	33.97	9.20	31.63	34.91	46.45	54.00	7.55	Average
5470.000	33.97	9.20	31.63	34.63	46.17	54.00	7.83	Average
@ 5492.500	34.03	9.21	31.63	92.56	104.17	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

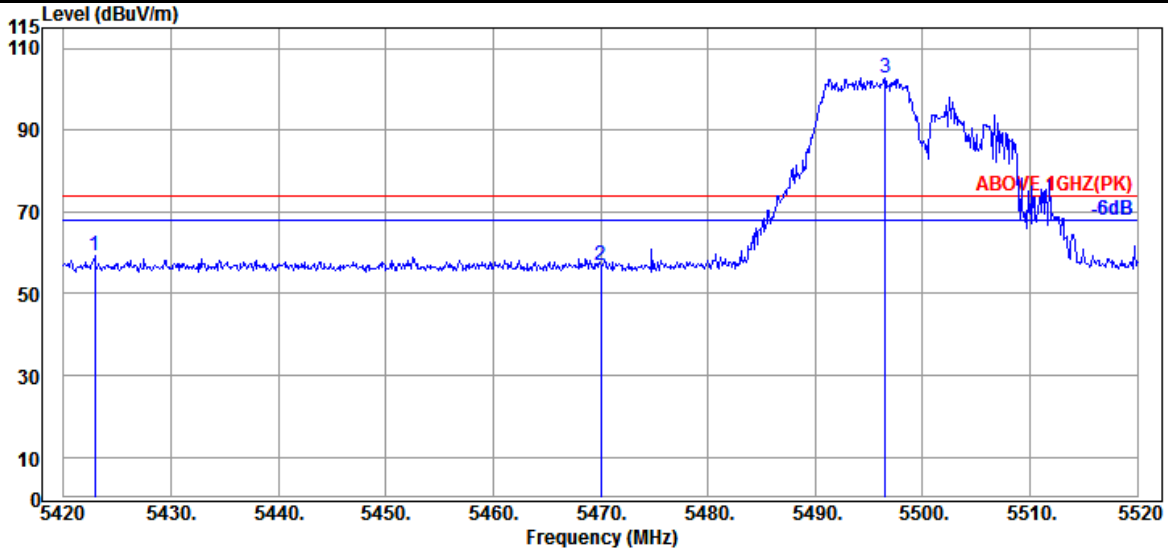

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.900	33.80	9.15	31.63	47.93	59.25	74.00	14.75	Peak
5470.000	33.97	9.20	31.63	45.28	56.82	74.00	17.18	Peak
@ 5496.500	34.10	9.21	31.63	91.14	102.82	---	---	Peak

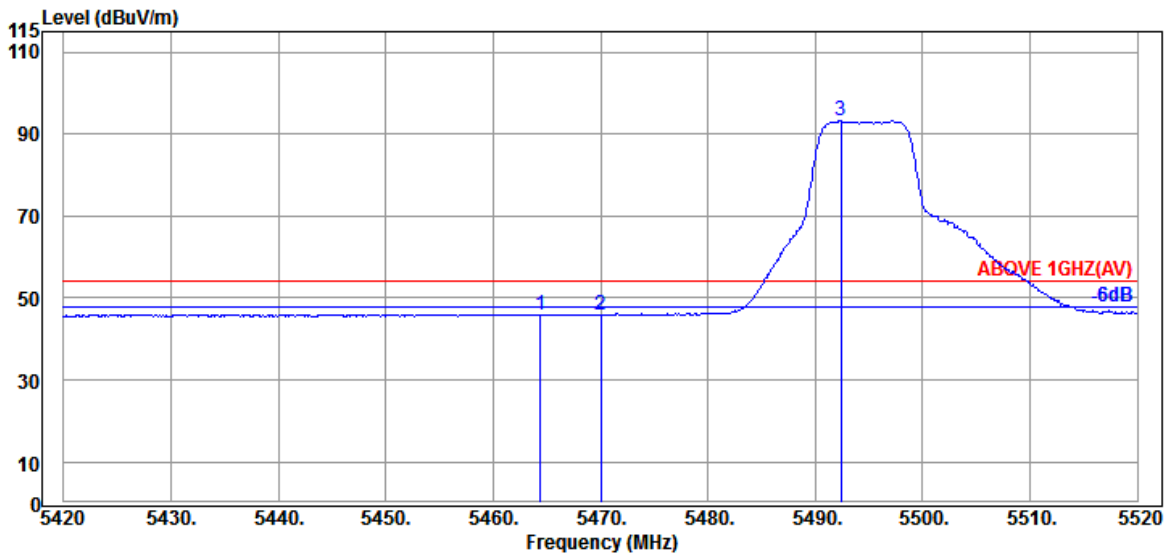


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	33.97	9.20	31.63	34.46	46.00	54.00	8.00	Average
5470.000	33.97	9.20	31.63	34.32	45.86	54.00	8.14	Average
@ 5492.400	34.03	9.21	31.63	81.72	93.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

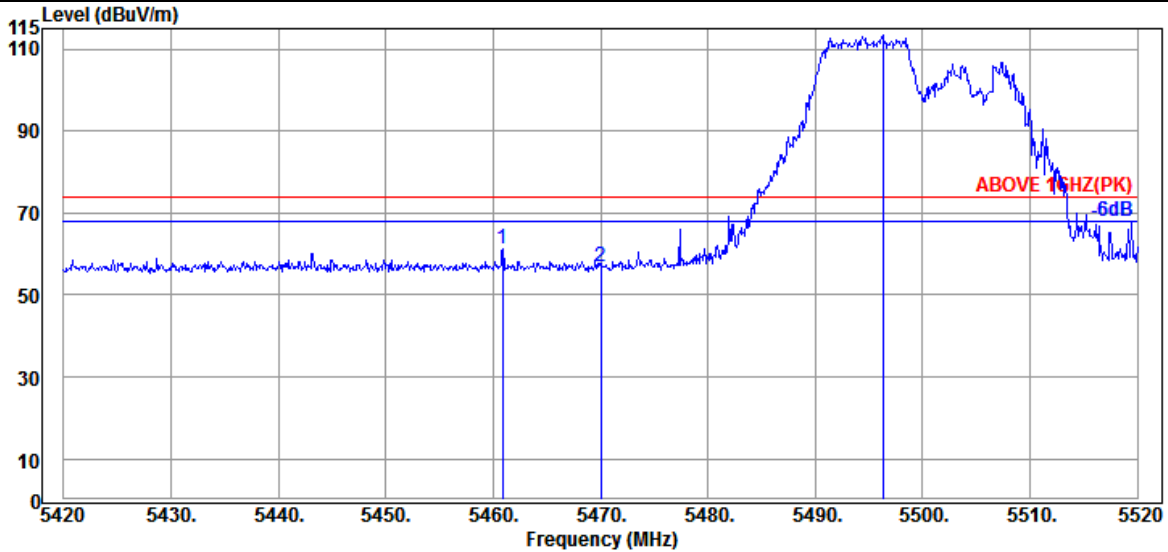

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.900	33.90	9.18	31.63	49.94	61.39	74.00	12.61	Peak
5470.000	33.97	9.20	31.63	45.33	56.87	74.00	17.13	Peak
@ 5496.300	34.10	9.21	31.63	101.92	113.60	---	---	Peak

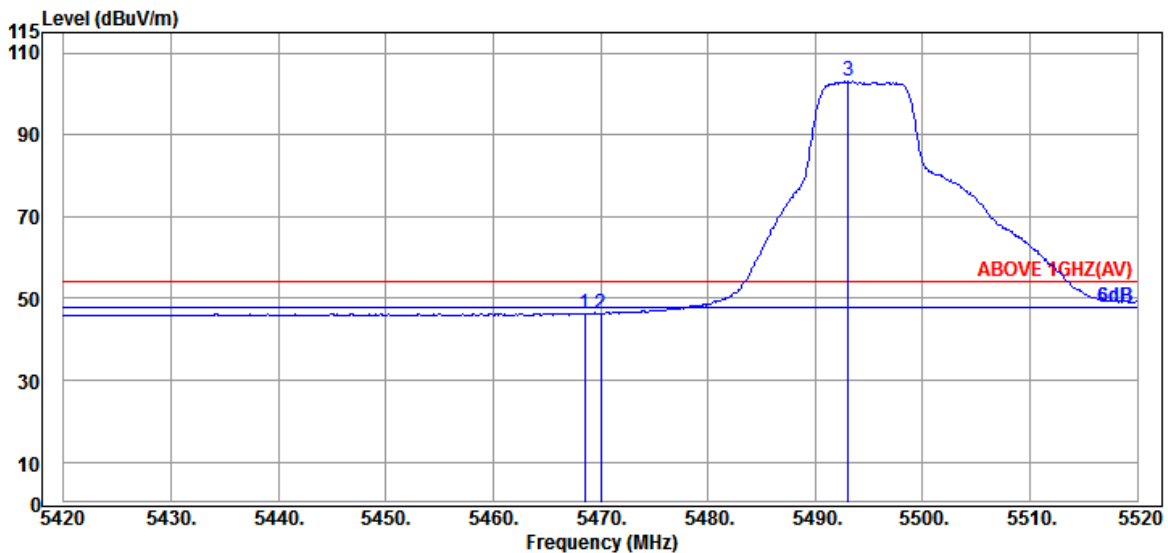


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	33.97	9.20	31.63	34.84	46.38	54.00	7.62	Average
5470.000	33.97	9.20	31.63	34.79	46.33	54.00	7.67	Average
@ 5493.100	34.03	9.21	31.63	91.42	103.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

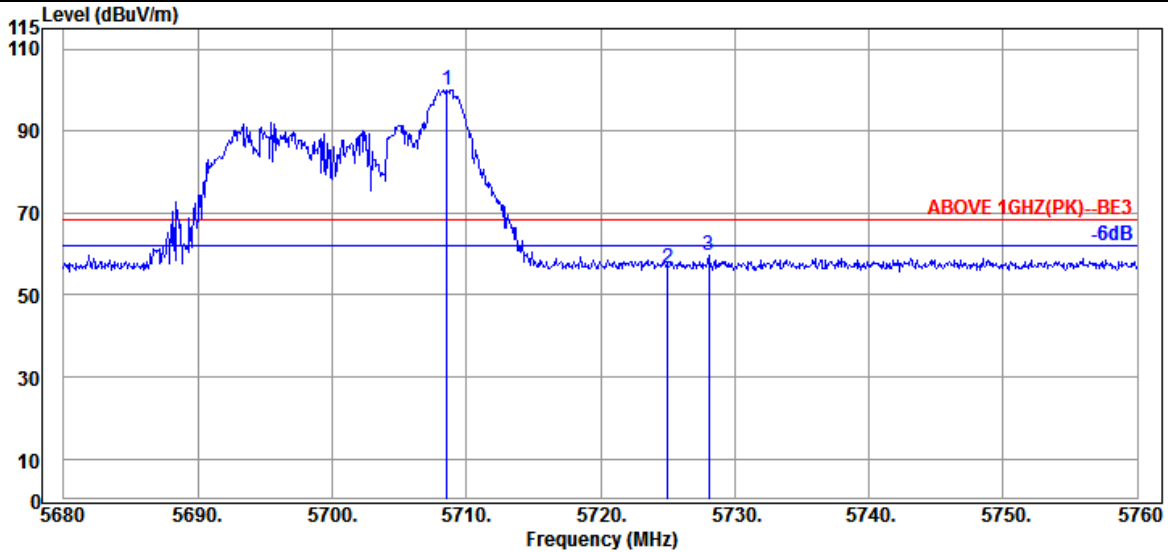

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.560	34.40	9.40	31.74	88.05	100.11	---	---	Peak
5725.040	34.50	9.42	31.74	44.42	56.60	68.20	11.60	Peak
5728.080	34.50	9.42	31.75	47.66	59.83	68.20	8.37	Peak

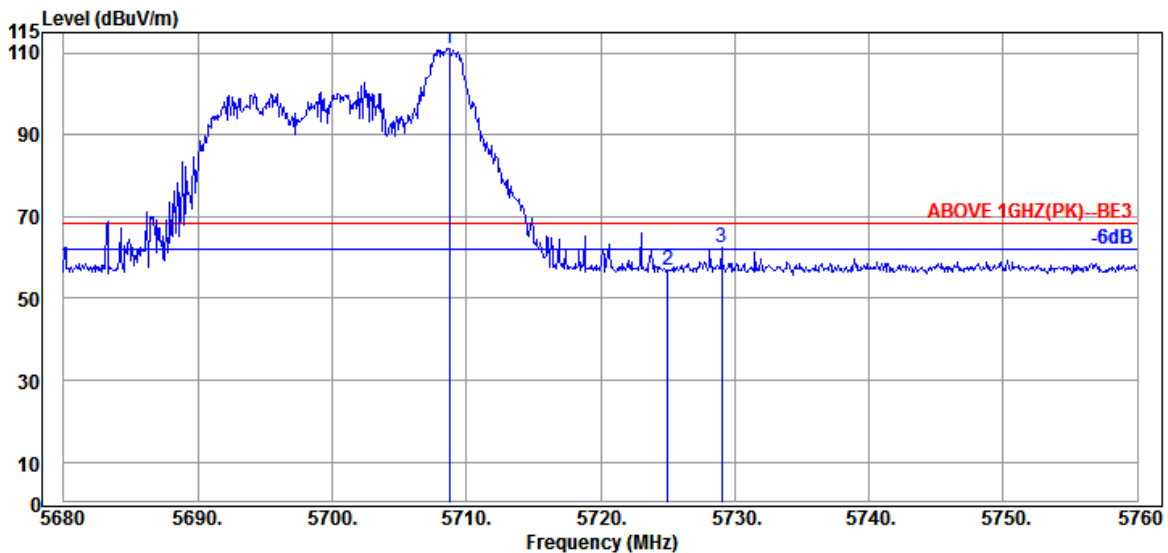


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.720	34.40	9.40	31.74	99.14	111.20	---	---	Peak
5725.040	34.50	9.42	31.74	44.76	56.94	68.20	11.26	Peak
5729.040	34.50	9.42	31.75	50.11	62.28	68.20	5.92	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

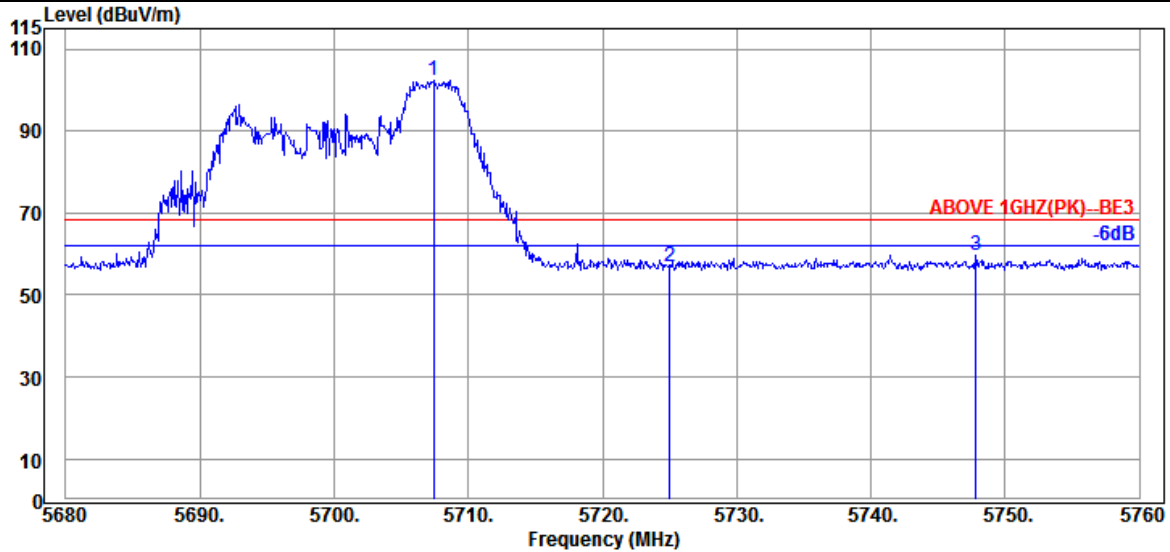

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5707.440	34.40	9.40	31.73	90.19	102.26	---	---	Peak
5725.040	34.50	9.42	31.74	44.70	56.88	68.20	11.32	Peak
5747.840	34.60	9.43	31.75	47.43	59.71	68.20	8.49	Peak

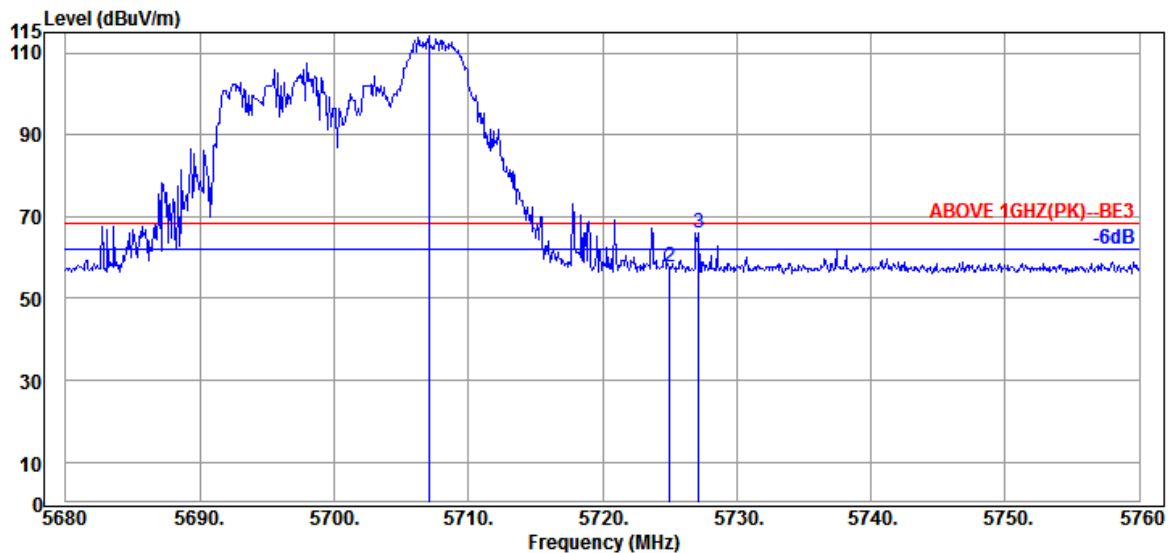


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5707.040	34.40	9.40	31.73	102.00	114.07	---	---	Peak
5725.040	34.50	9.42	31.74	45.65	57.83	68.20	10.37	Peak
5727.200	34.50	9.42	31.75	53.93	66.10	68.20	2.10	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

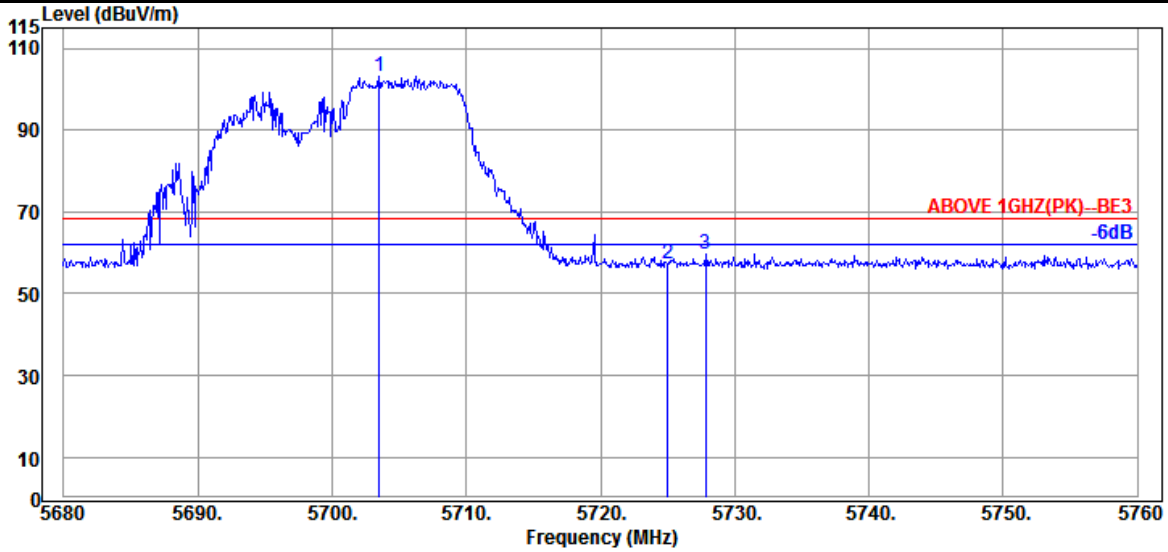

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.520	34.30	9.40	31.73	91.26	103.23	---	---	Peak
5725.040	34.50	9.42	31.74	45.19	57.37	68.20	10.83	Peak
5727.840	34.50	9.42	31.75	47.70	59.87	68.20	8.33	Peak

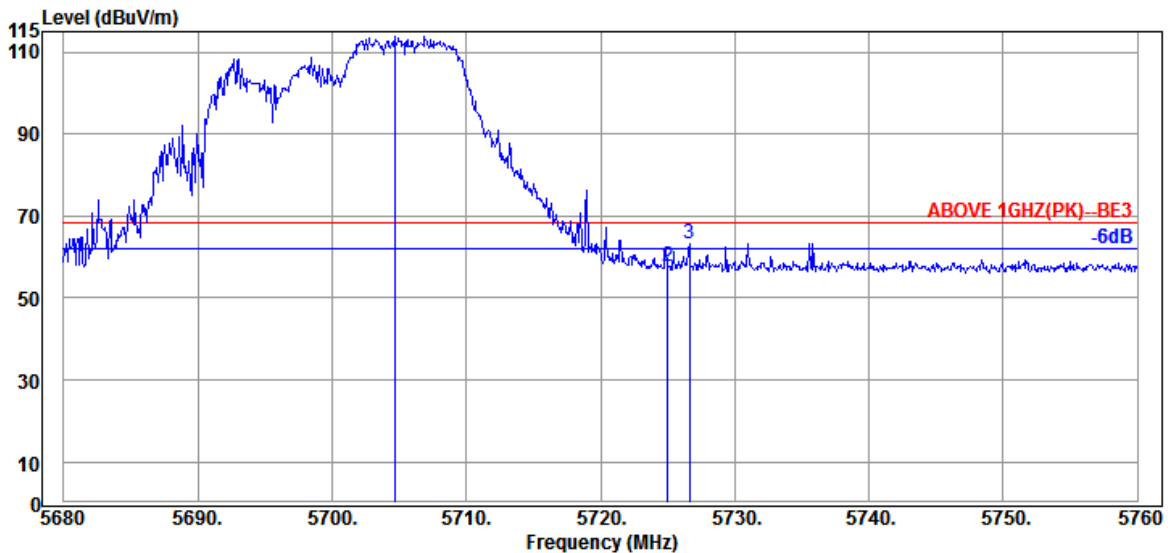


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.640	34.30	9.40	31.73	102.00	113.97	---	---	Peak
5725.040	34.50	9.42	31.74	45.66	57.84	68.20	10.36	Peak
5726.640	34.50	9.42	31.75	51.22	63.39	68.20	4.81	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

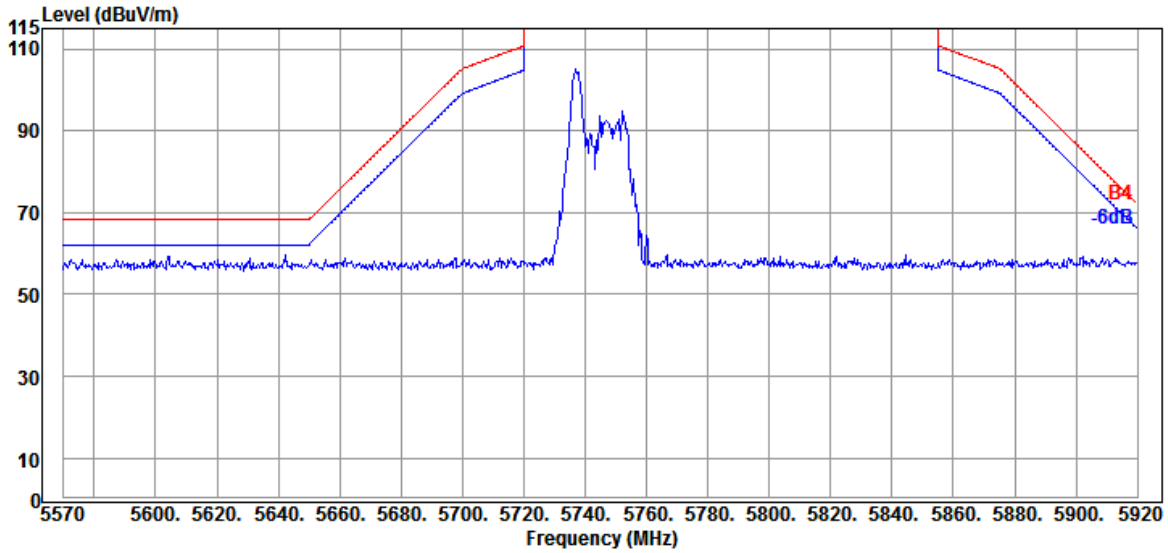


Antenna at Vertical Polarization

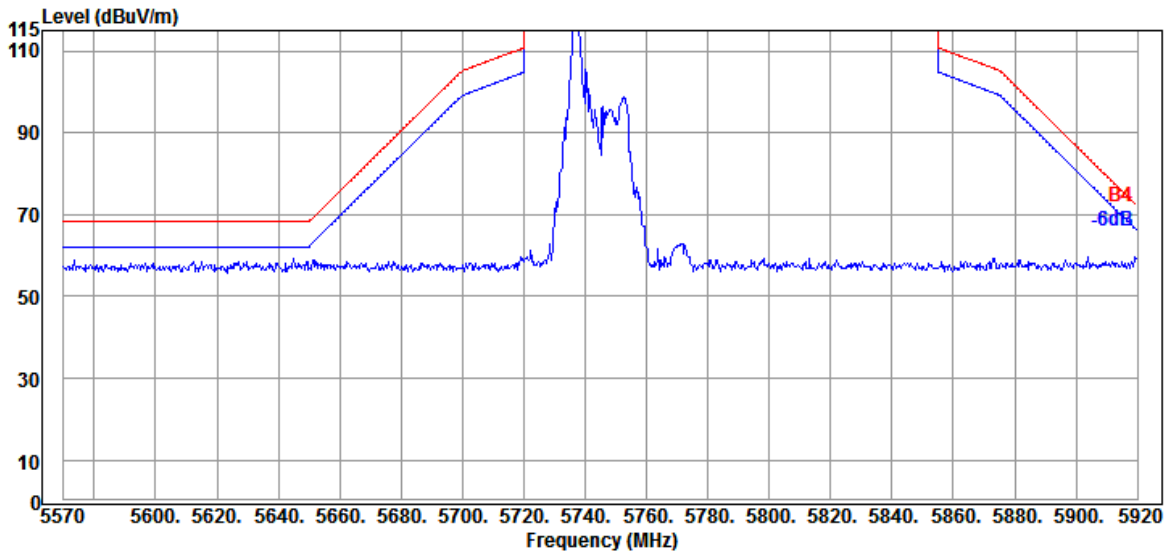


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

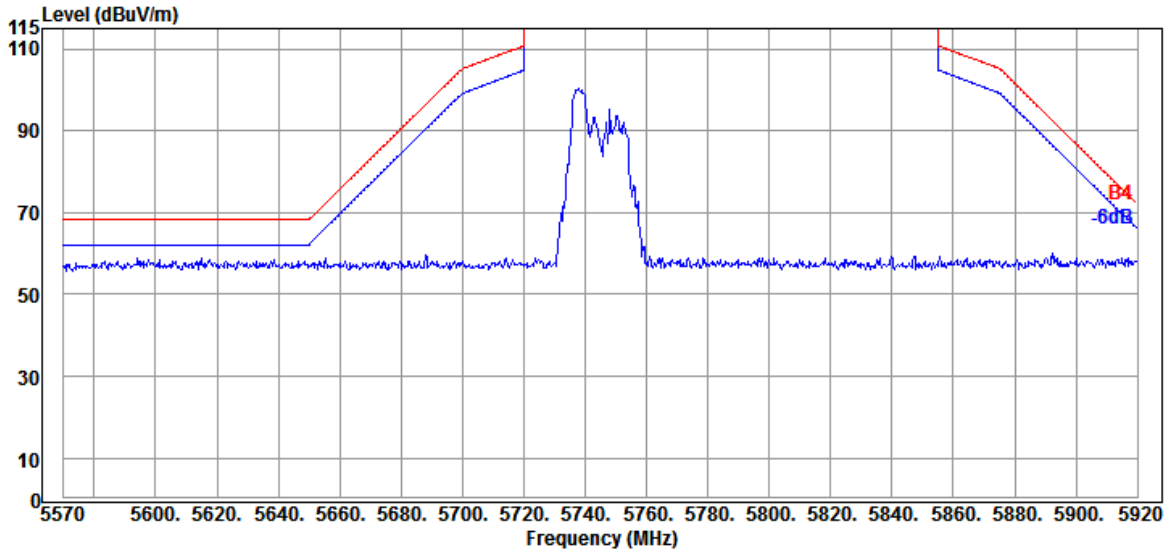


Antenna at Vertical Polarization

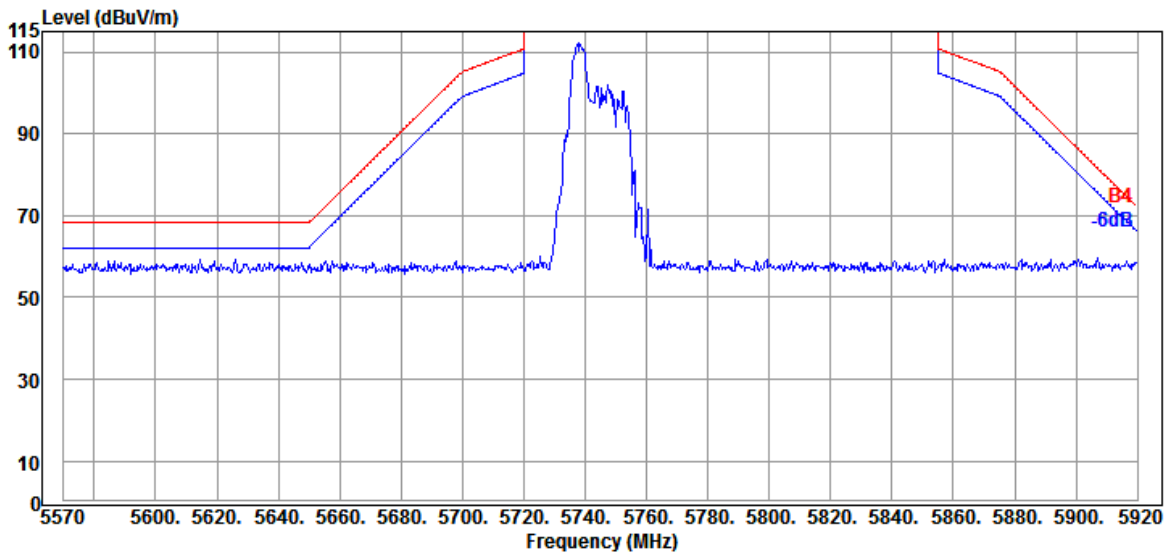


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

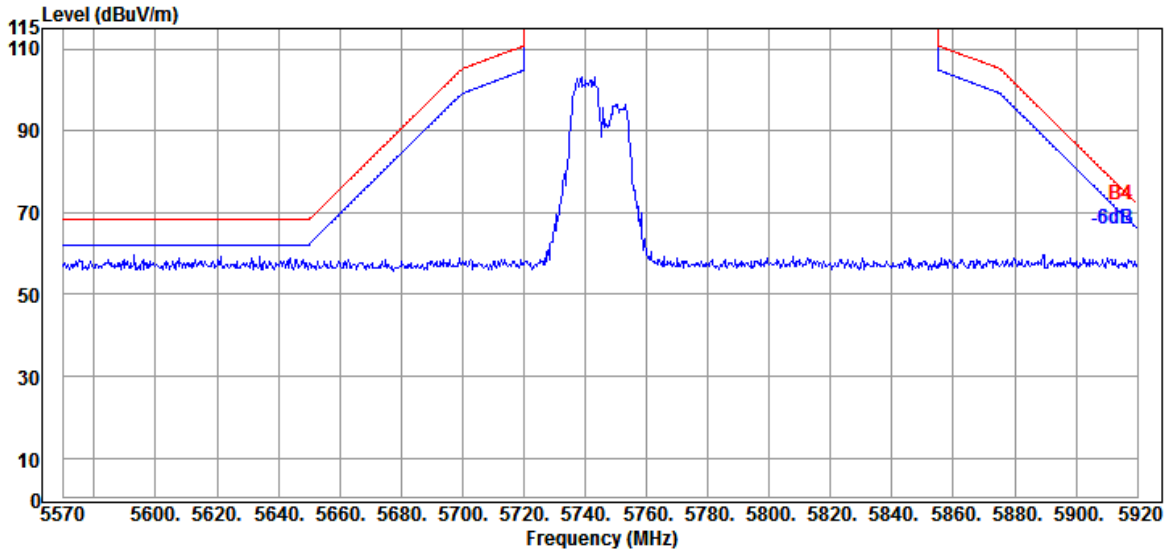


Antenna at Vertical Polarization

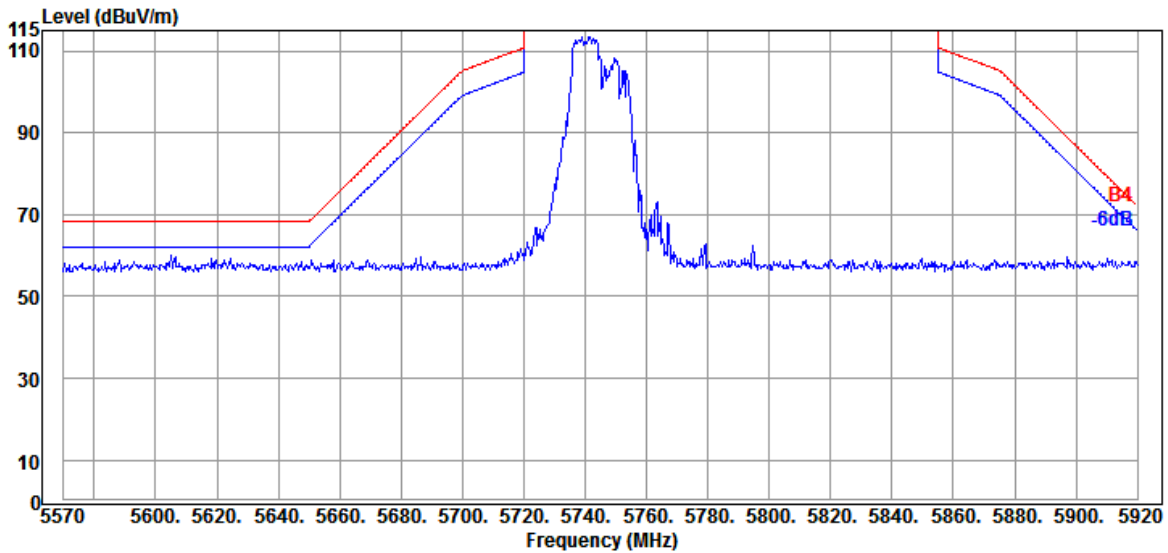


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

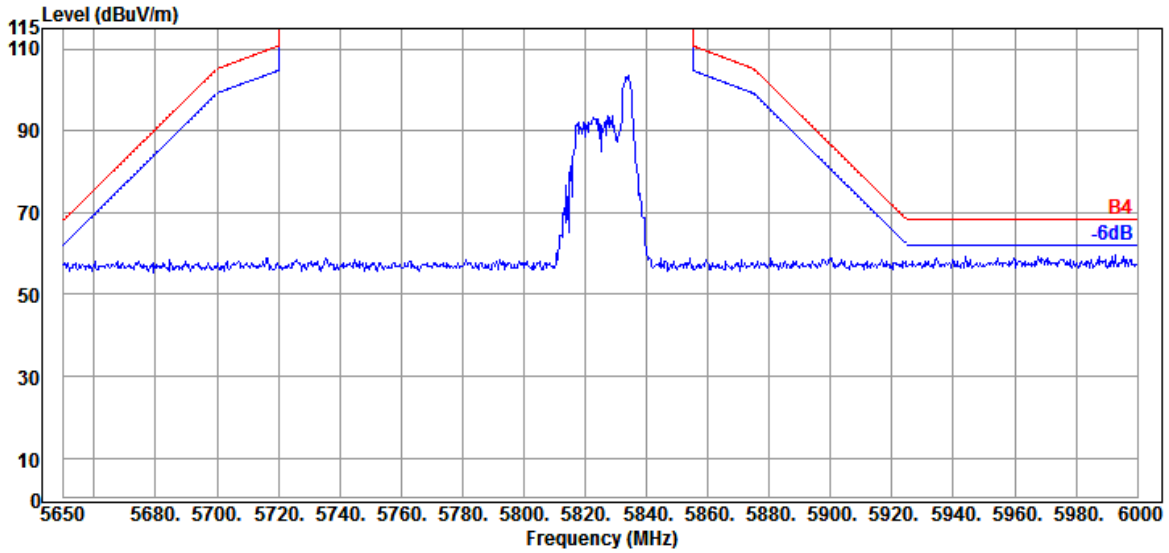


Antenna at Vertical Polarization

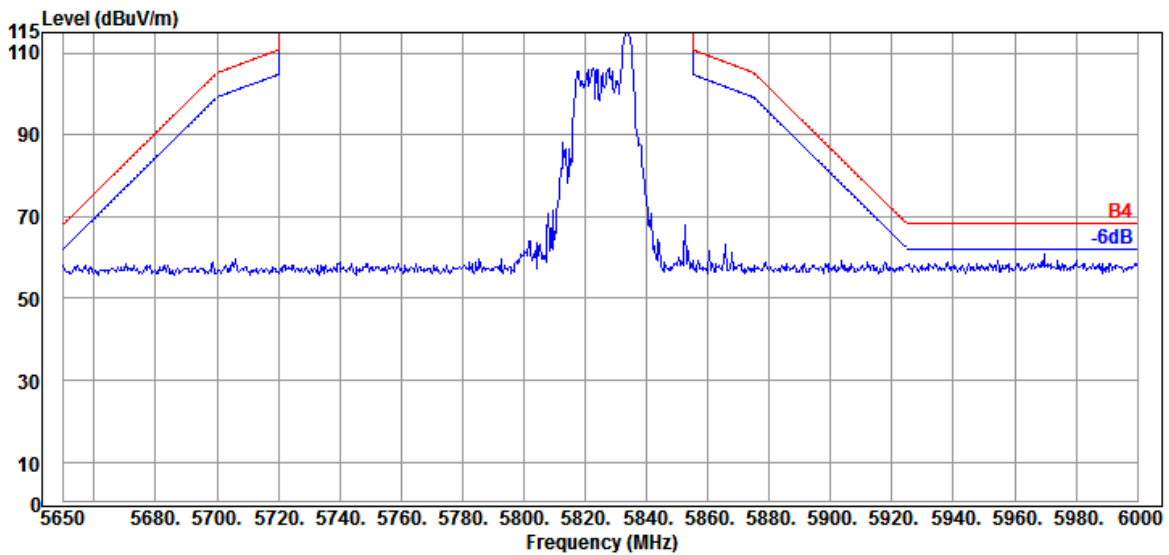


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

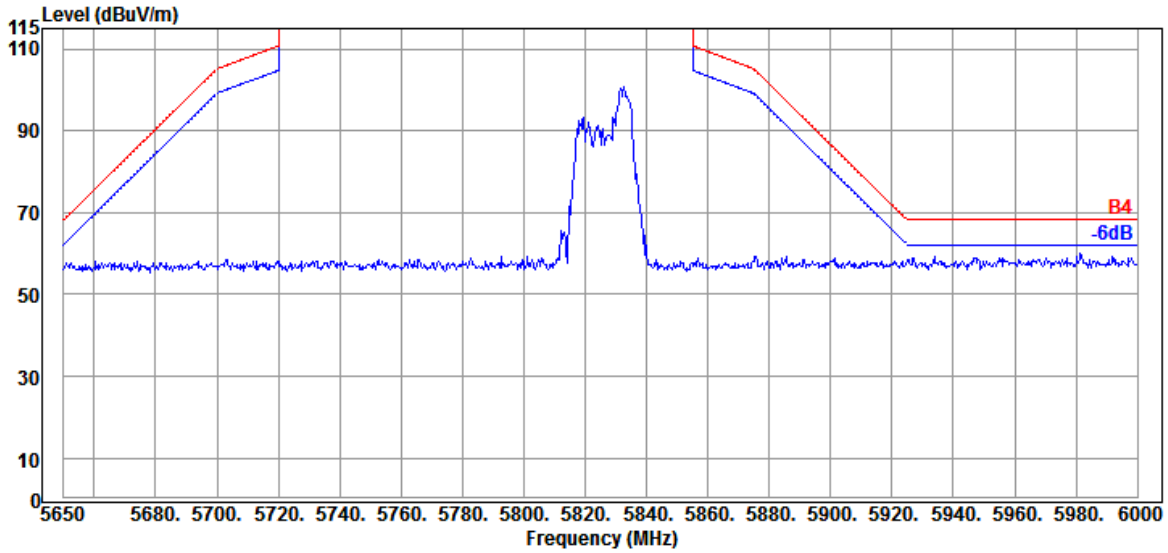


Antenna at Vertical Polarization

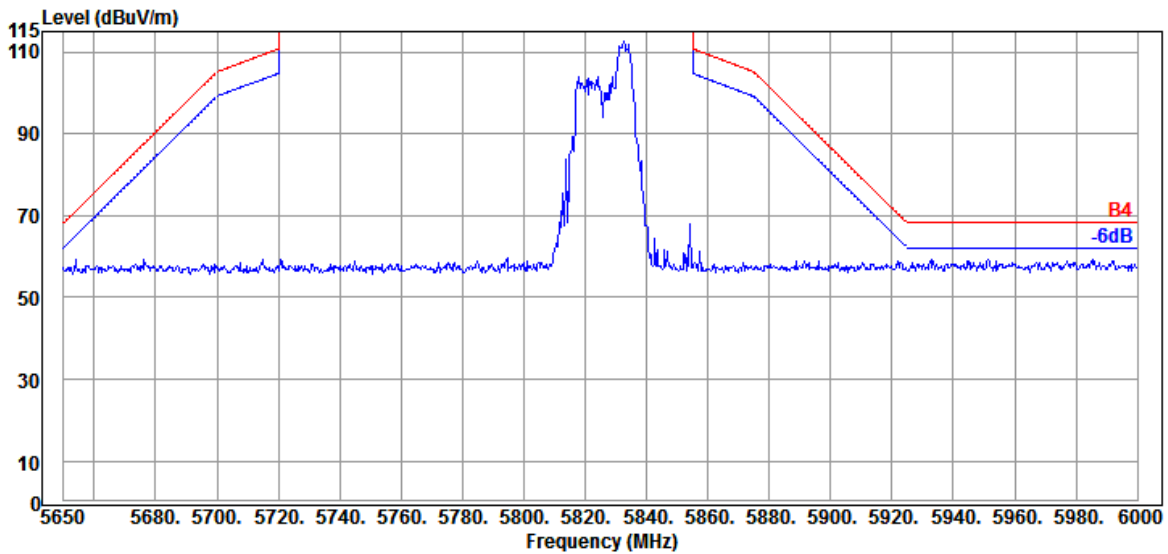


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

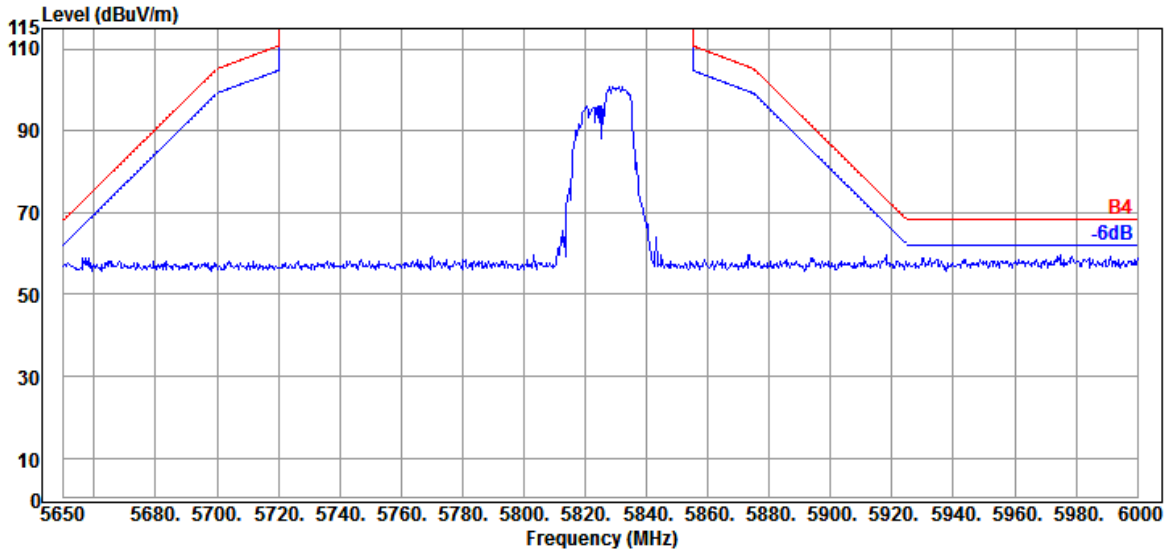

Antenna at Vertical Polarization

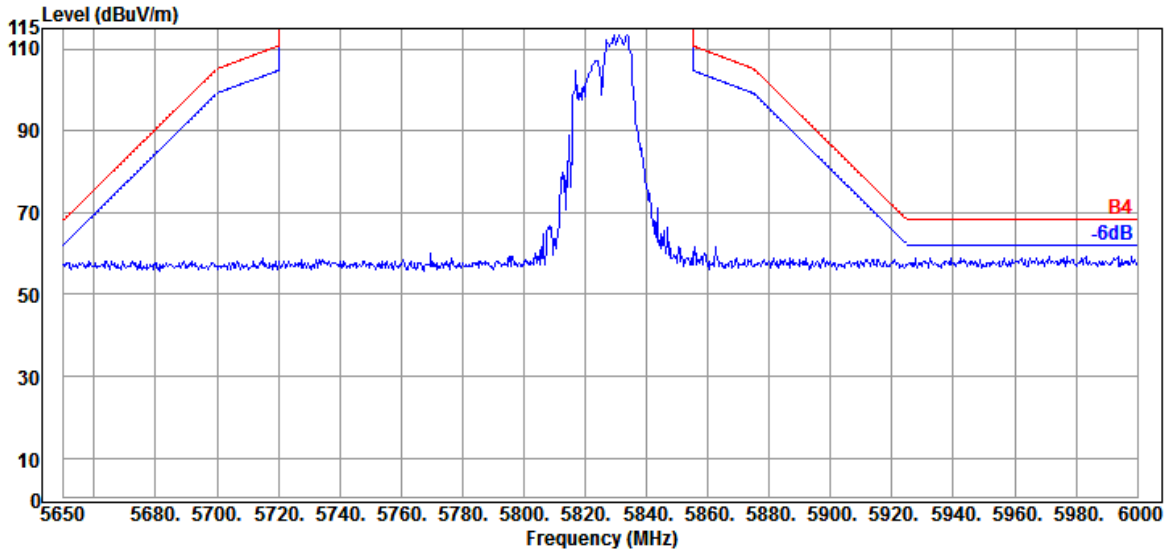


Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

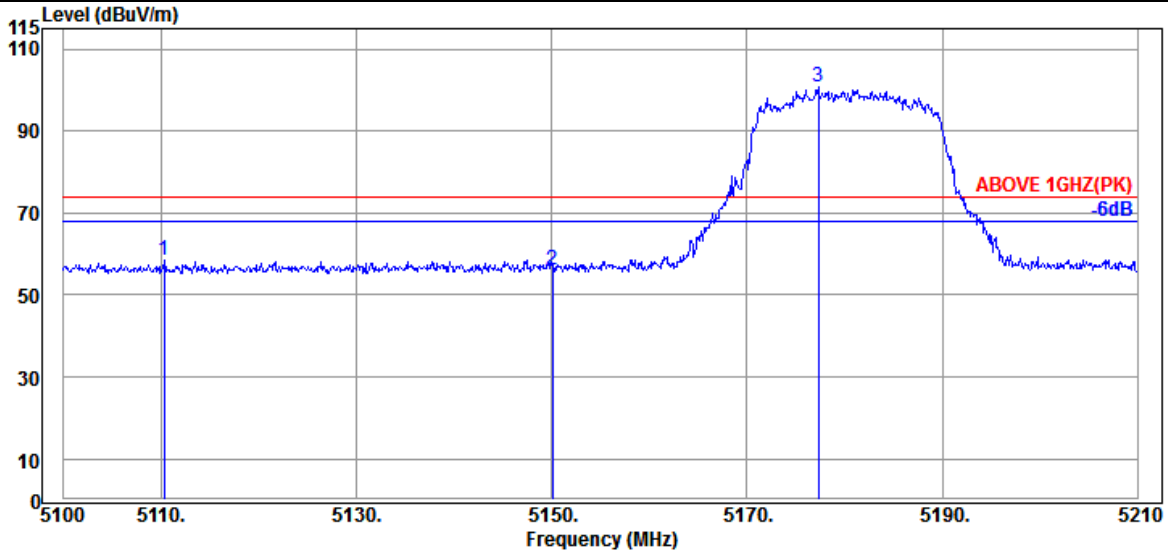

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.340	33.00	8.89	31.63	48.30	58.56	74.00	15.44	Peak
5150.050	33.10	8.92	31.63	45.54	55.93	74.00	18.07	Peak
@ 5177.330	33.17	8.95	31.63	90.45	100.94	---	---	Peak

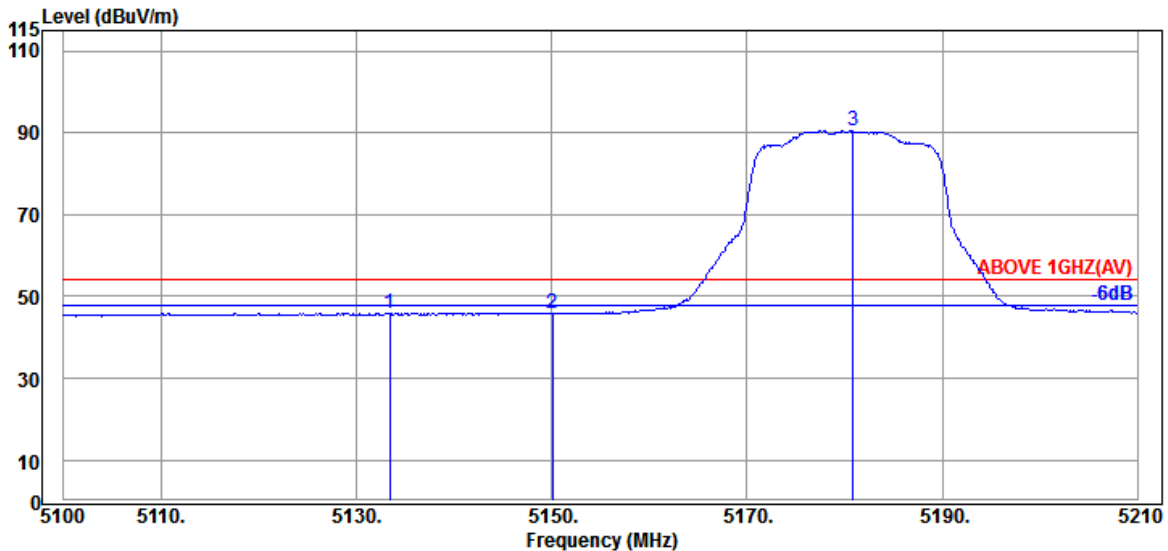


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.440	33.07	8.91	31.63	35.61	45.96	54.00	8.04	Average
5150.050	33.10	8.92	31.63	35.35	45.74	54.00	8.26	Average
@ 5180.850	33.17	8.95	31.63	79.99	90.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

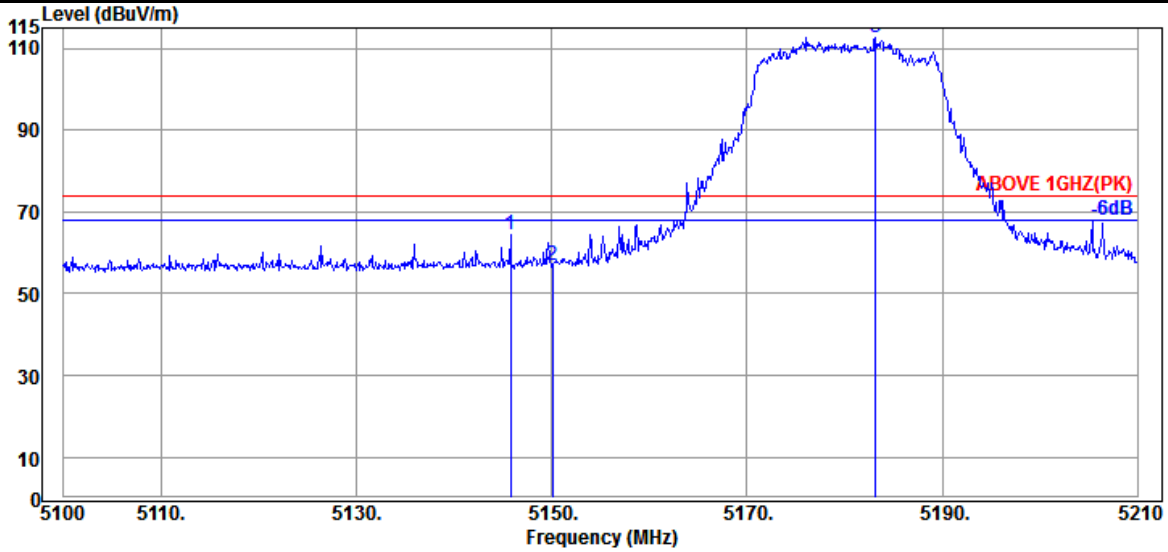

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.760	33.10	8.92	31.63	54.07	64.46	74.00	9.54	Peak
5150.050	33.10	8.92	31.63	46.36	56.75	74.00	17.25	Peak
@ 5183.160	33.17	8.95	31.63	102.24	112.73	---	---	Peak

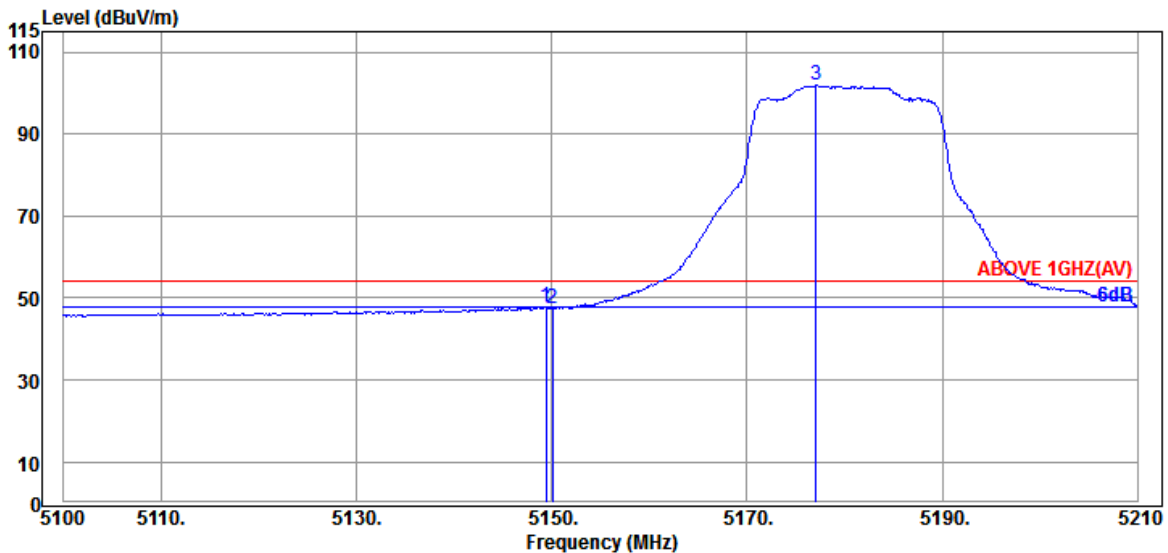


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	33.10	8.92	31.63	37.28	47.67	54.00	6.33	Average
5150.050	33.10	8.92	31.63	37.13	47.52	54.00	6.48	Average
@ 5177.110	33.17	8.95	31.63	91.37	101.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

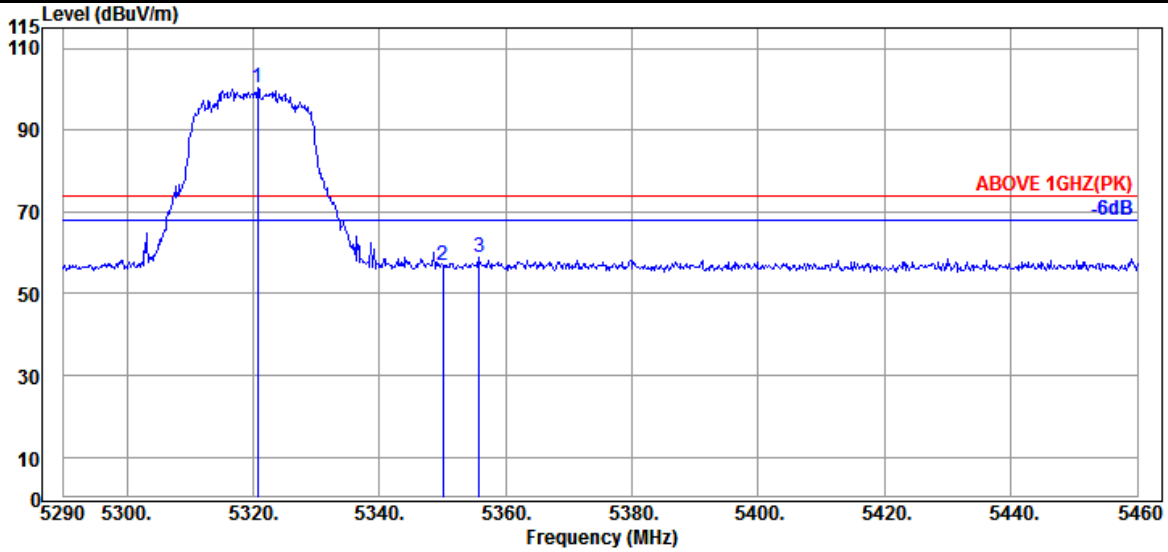

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.770	33.30	9.07	31.63	89.65	100.39	---	---	Peak
5350.010	33.50	9.10	31.63	45.95	56.92	74.00	17.08	Peak
5355.790	33.57	9.10	31.63	47.97	59.01	74.00	14.99	Peak

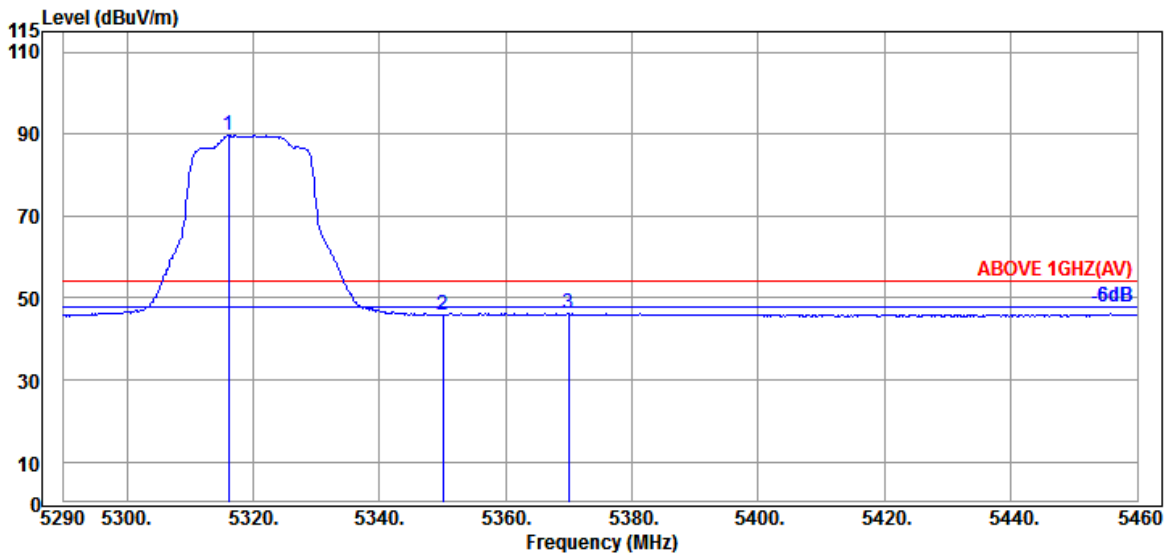


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.180	33.30	9.07	31.63	78.90	89.64	---	---	Average
5350.010	33.50	9.10	31.63	34.91	45.88	54.00	8.12	Average
5369.900	33.63	9.11	31.63	35.17	46.28	54.00	7.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

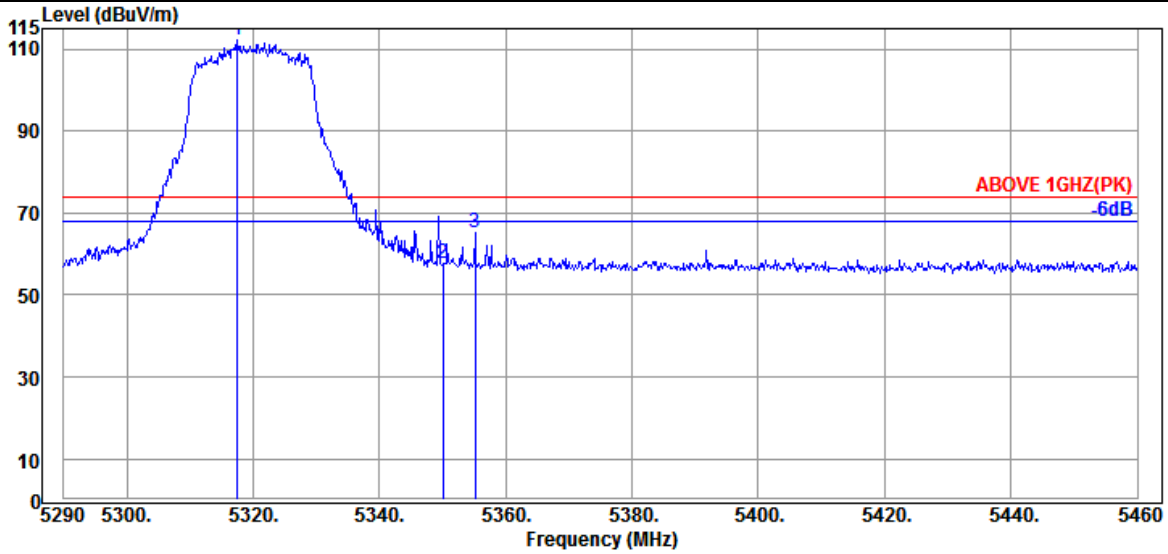

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5317.540	33.30	9.07	31.63	101.46	112.20	---	---	Peak
5350.010	33.50	9.10	31.63	46.73	57.70	74.00	16.30	Peak
5355.110	33.57	9.10	31.63	54.30	65.34	74.00	8.66	Peak

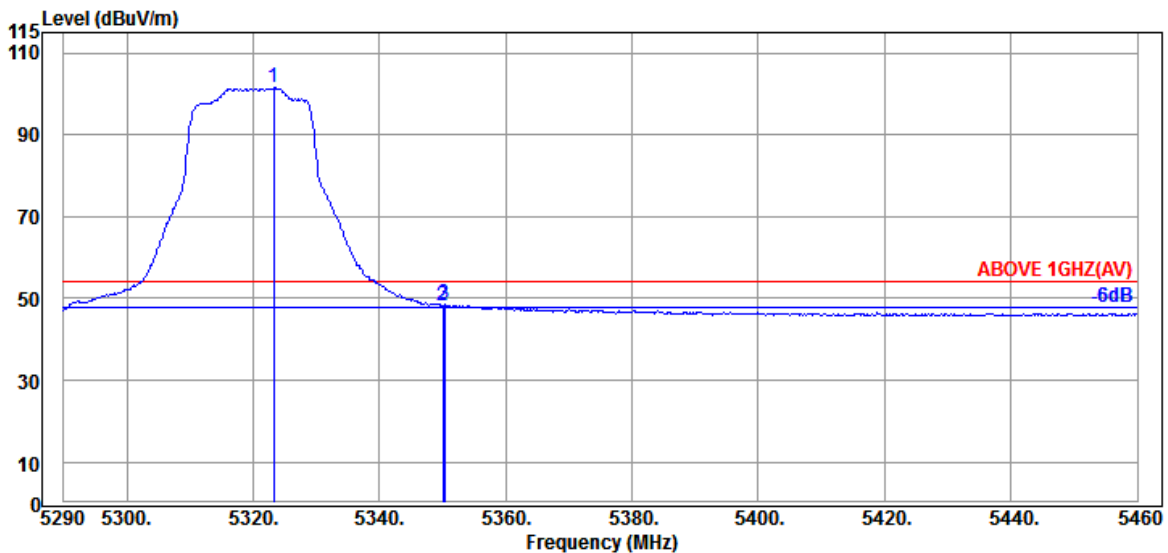


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5323.320	33.40	9.07	31.63	90.70	101.54	---	---	Average
5350.010	33.50	9.10	31.63	37.23	48.20	54.00	5.80	Average
5350.350	33.50	9.10	31.63	37.50	48.47	54.00	5.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

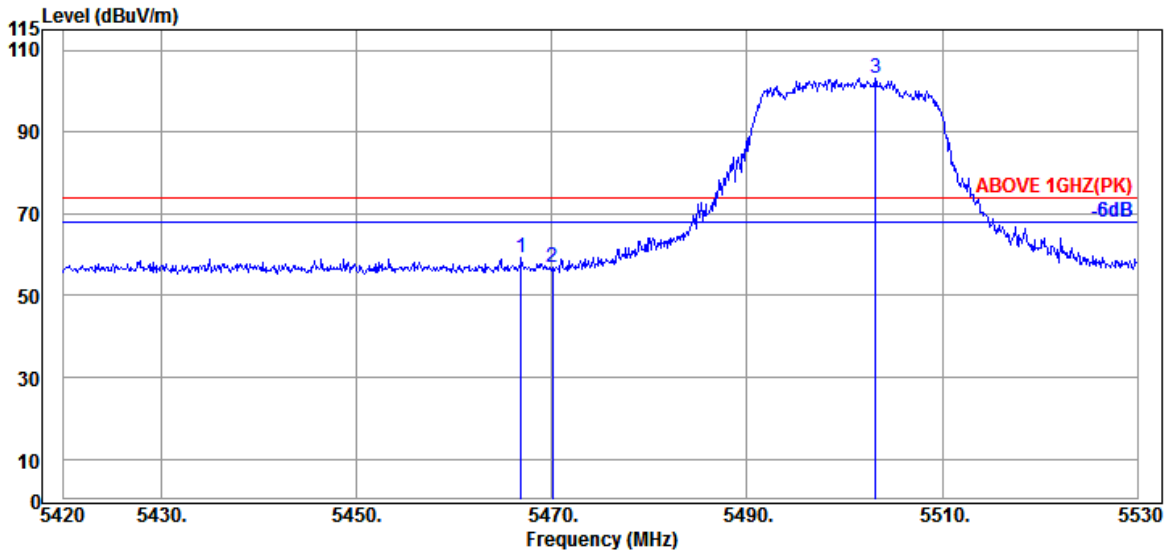

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.860	33.97	9.20	31.63	47.79	59.33	74.00	14.67	Peak
5470.050	33.97	9.20	31.63	45.29	56.83	74.00	17.17	Peak
@ 5503.160	34.10	9.23	31.63	91.43	103.13	---	---	Peak

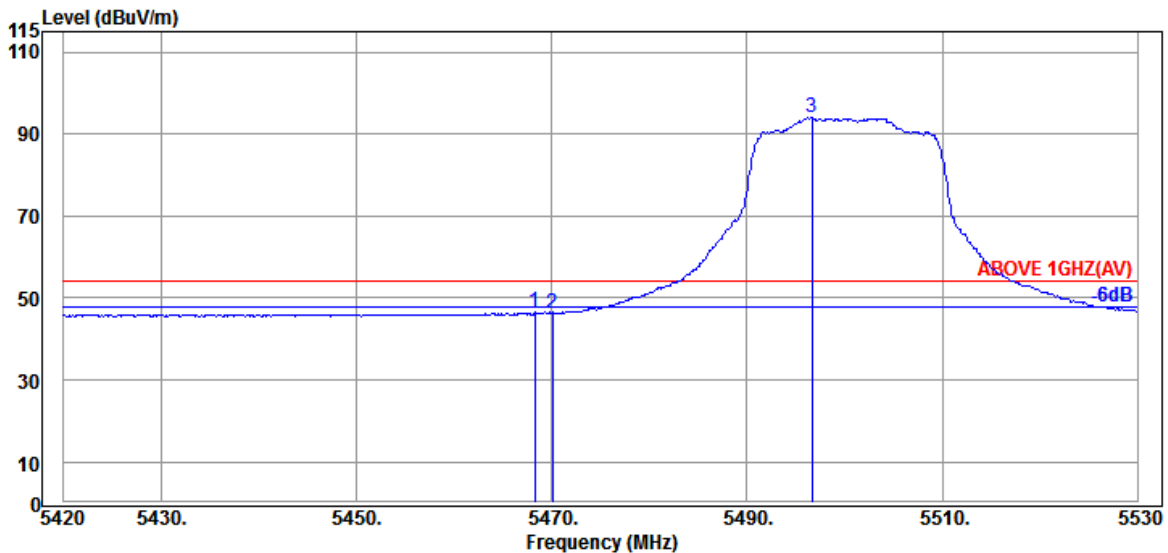


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.290	33.97	9.20	31.63	34.92	46.46	54.00	7.54	Average
5470.050	33.97	9.20	31.63	34.85	46.39	54.00	7.61	Average
@ 5496.670	34.10	9.23	31.63	82.36	94.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

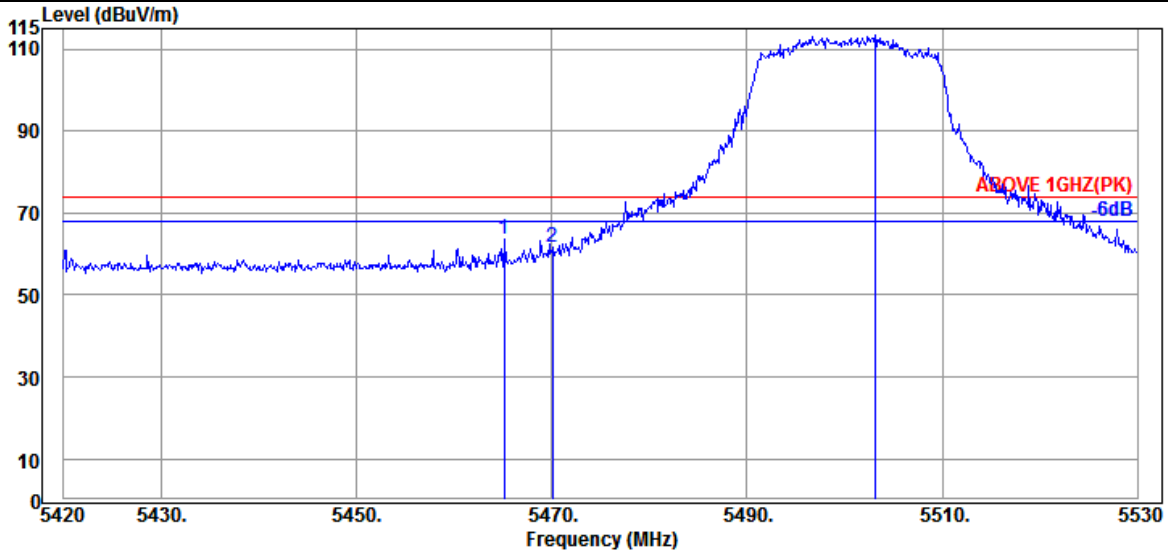

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.100	33.97	9.20	31.63	52.16	63.70	74.00	10.30	Peak
5470.050	33.97	9.20	31.63	49.91	61.45	74.00	12.55	Peak
@ 5503.160	34.10	9.23	31.63	101.83	113.53	---	---	Peak

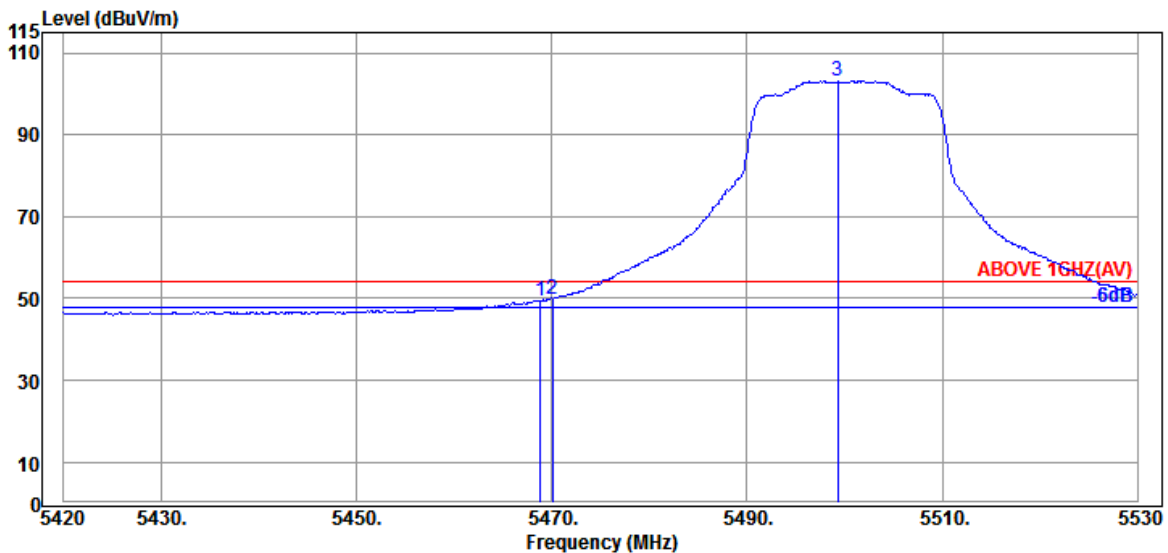


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.840	33.97	9.20	31.63	38.05	49.59	54.00	4.41	Average
5470.050	33.97	9.20	31.63	38.26	49.80	54.00	4.20	Average
@ 5499.310	34.10	9.23	31.63	91.45	103.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

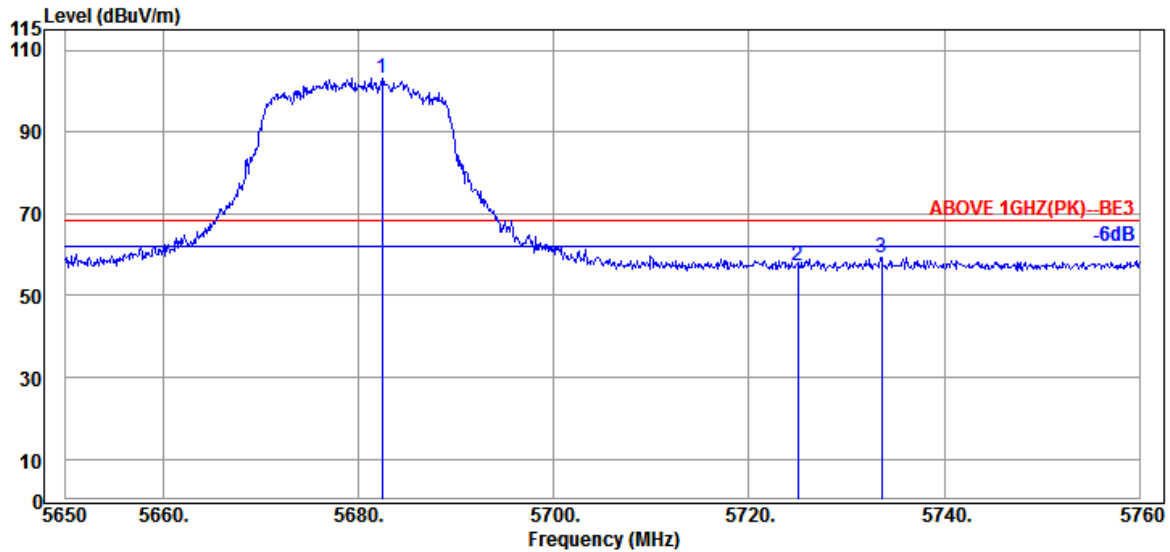

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.450	34.30	9.37	31.72	91.36	103.31	---	---	Peak
5725.020	34.50	9.42	31.74	45.24	57.42	68.20	10.78	Peak
5733.600	34.50	9.42	31.75	47.18	59.35	68.20	8.85	Peak

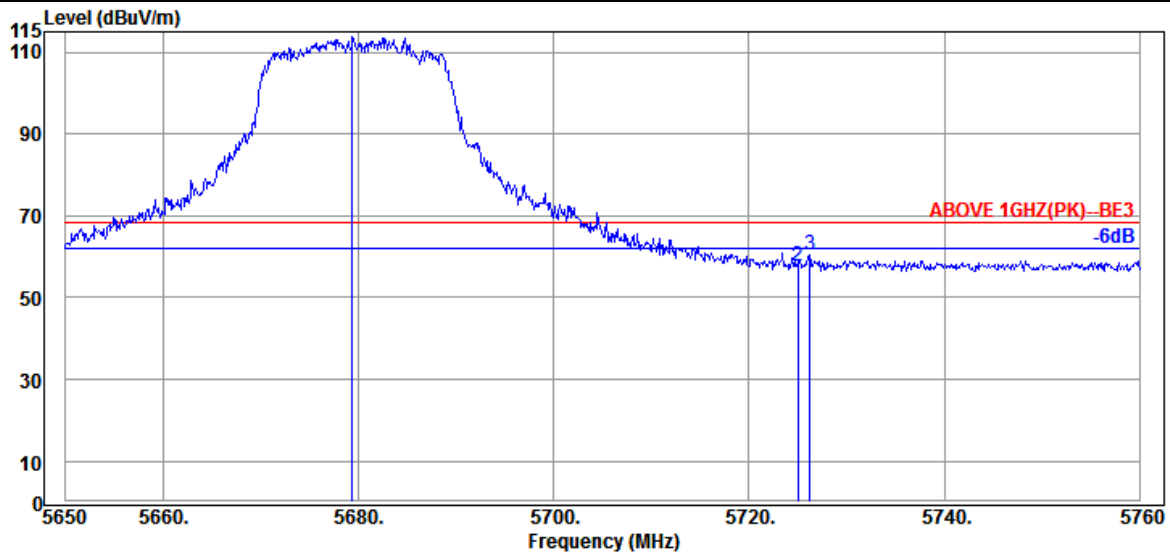


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.370	34.30	9.37	31.72	101.83	113.78	---	---	Peak
5725.020	34.50	9.42	31.74	45.61	57.79	68.20	10.41	Peak
5726.230	34.50	9.42	31.74	48.11	60.29	68.20	7.91	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

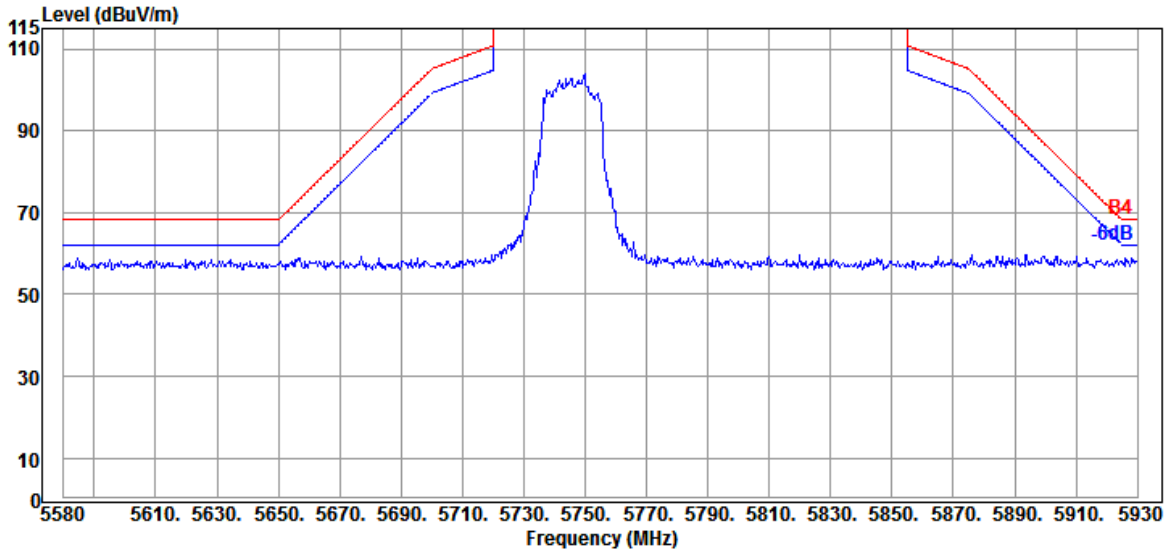


Antenna at Vertical Polarization

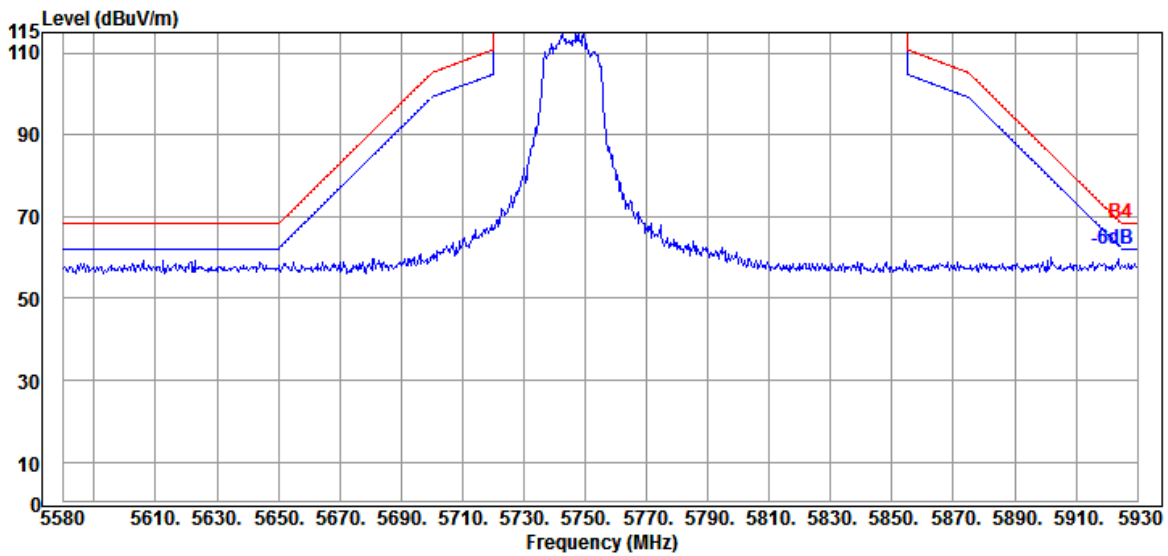


Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

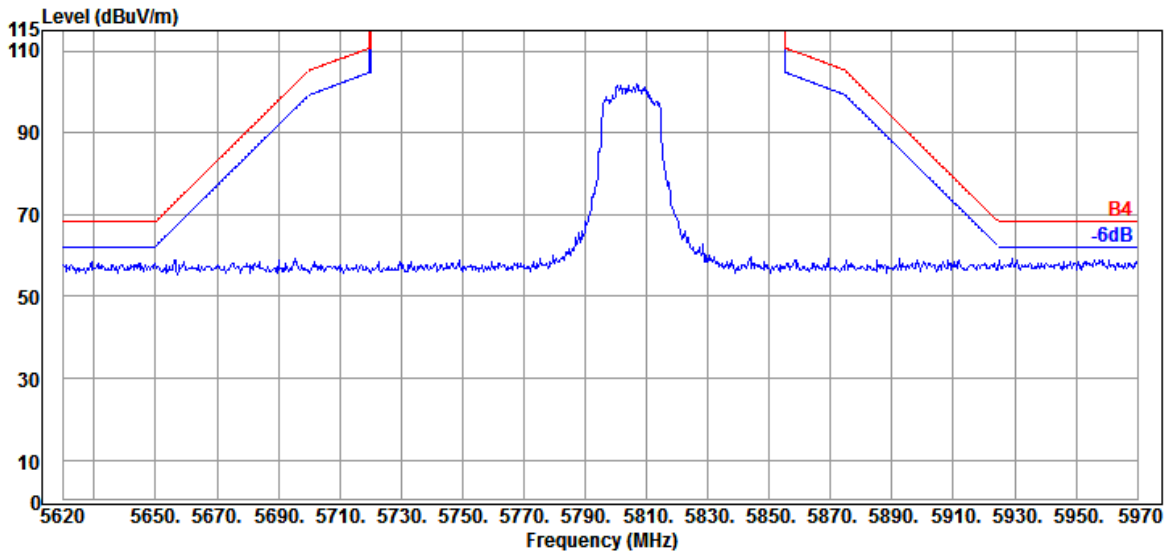

Antenna at Vertical Polarization

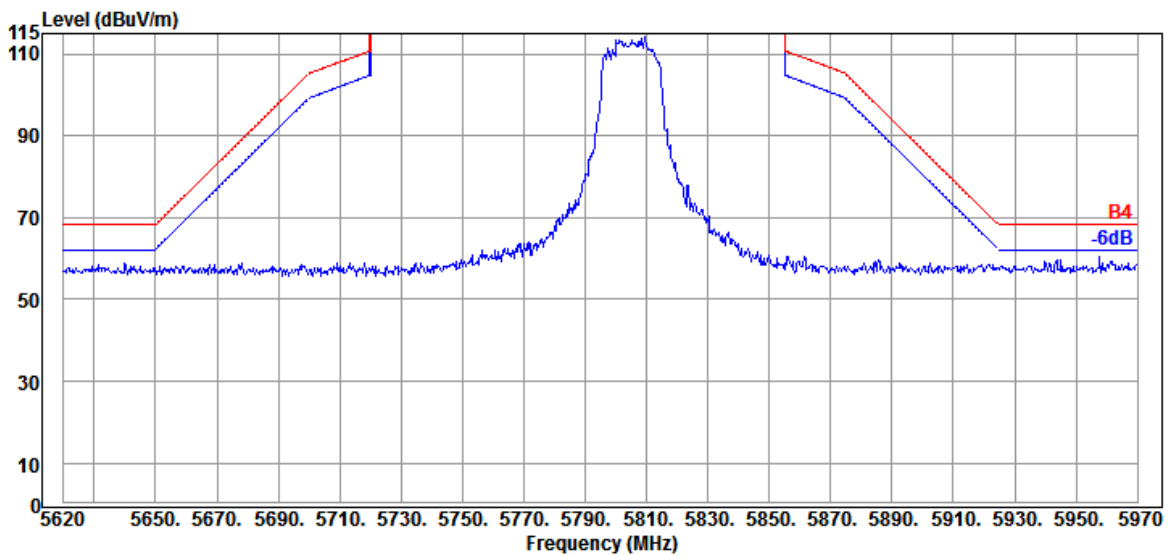


Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

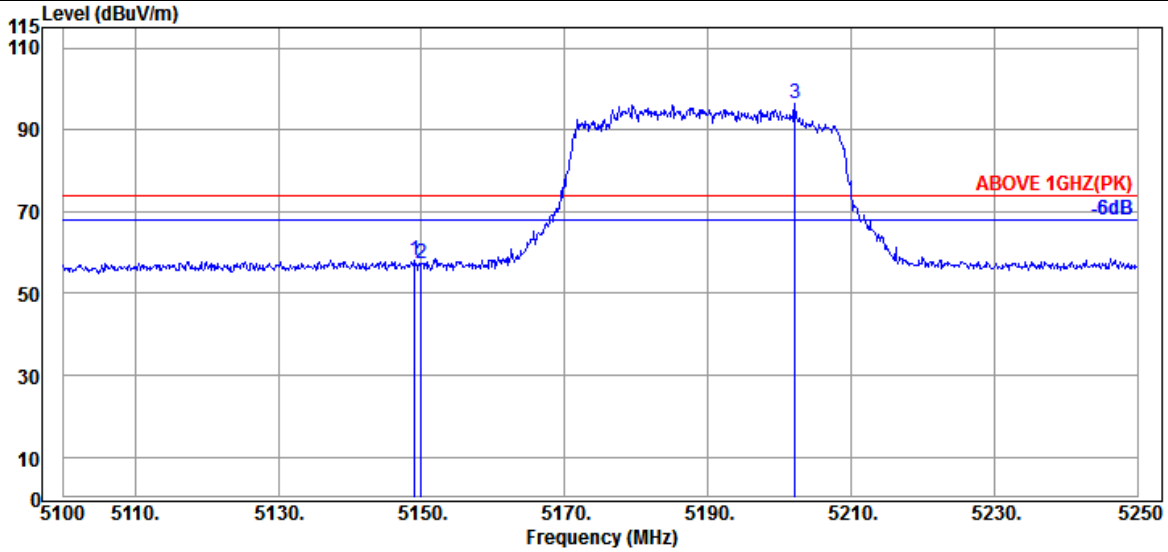

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	33.10	8.92	31.63	47.72	58.11	74.00	15.89	Peak
5149.950	33.10	8.92	31.63	46.73	57.12	74.00	16.88	Peak
@ 5202.150	33.17	8.96	31.63	85.86	96.36	---	---	Peak

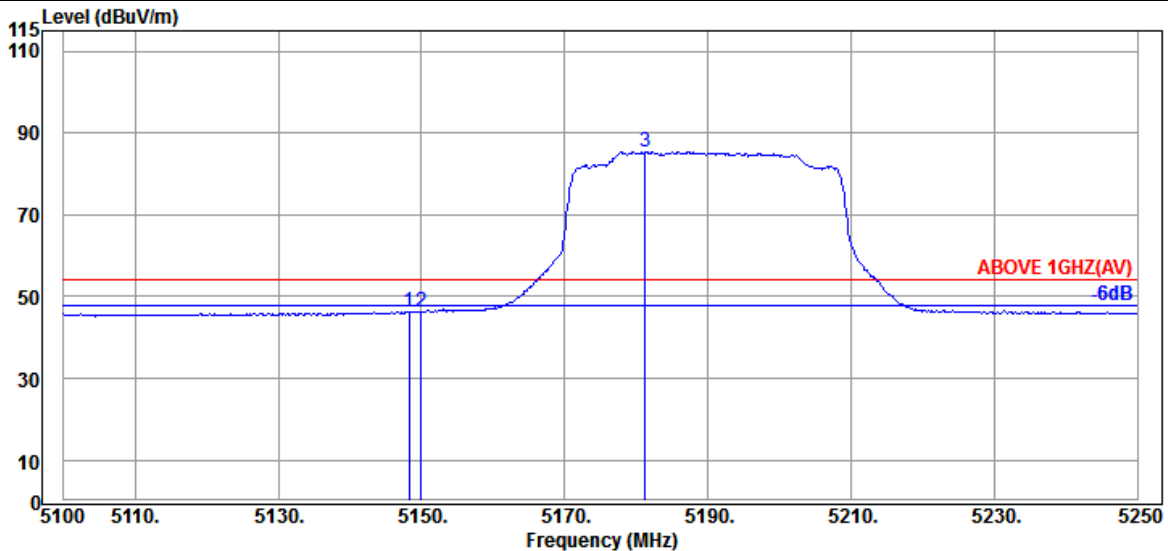


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.10	8.92	31.63	36.04	46.43	54.00	7.57	Average
5149.950	33.10	8.92	31.63	35.83	46.22	54.00	7.78	Average
@ 5181.300	33.17	8.95	31.63	74.92	85.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

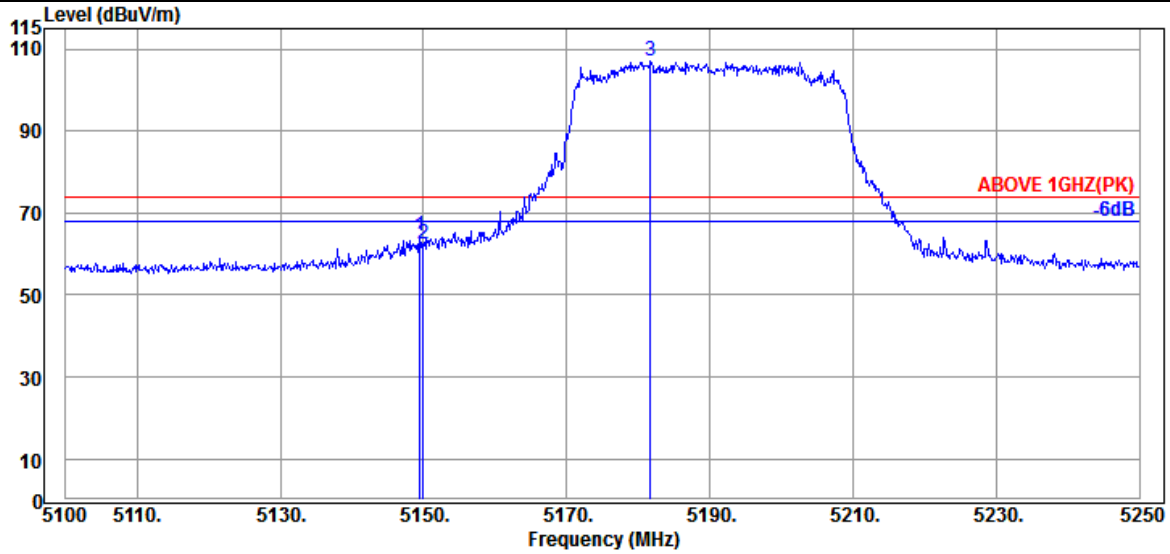

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.10	8.92	31.63	54.16	64.55	74.00	9.45	Peak
5149.950	33.10	8.92	31.63	51.99	62.38	74.00	11.62	Peak
@ 5181.750	33.17	8.95	31.63	96.48	106.97	---	---	Peak

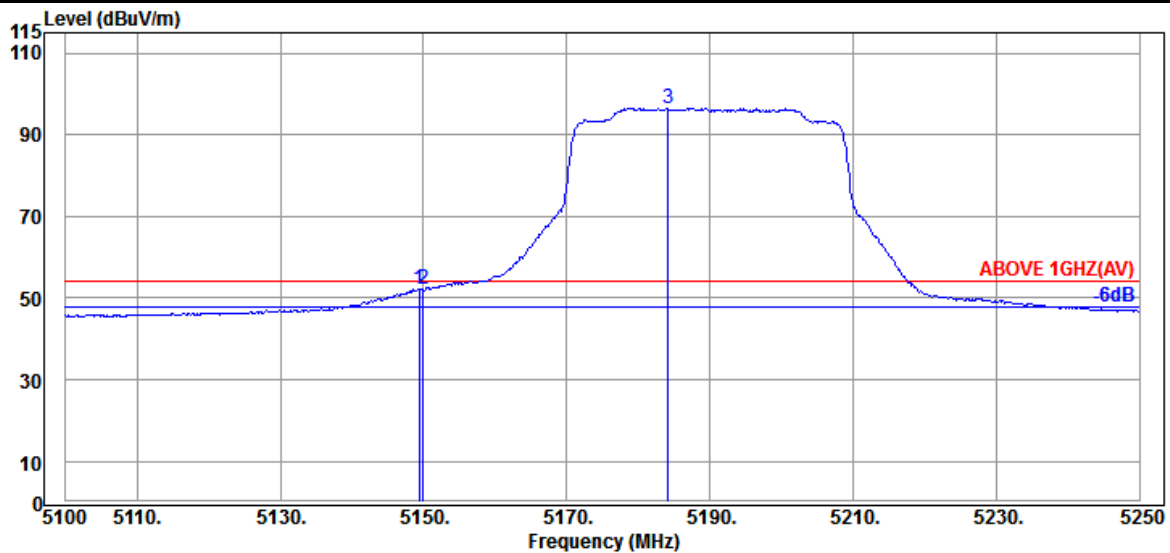


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	33.10	8.92	31.63	41.68	52.07	54.00	1.93	Average
5149.950	33.10	8.92	31.63	41.68	52.07	54.00	1.93	Average
@ 5184.150	33.17	8.95	31.63	85.94	96.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

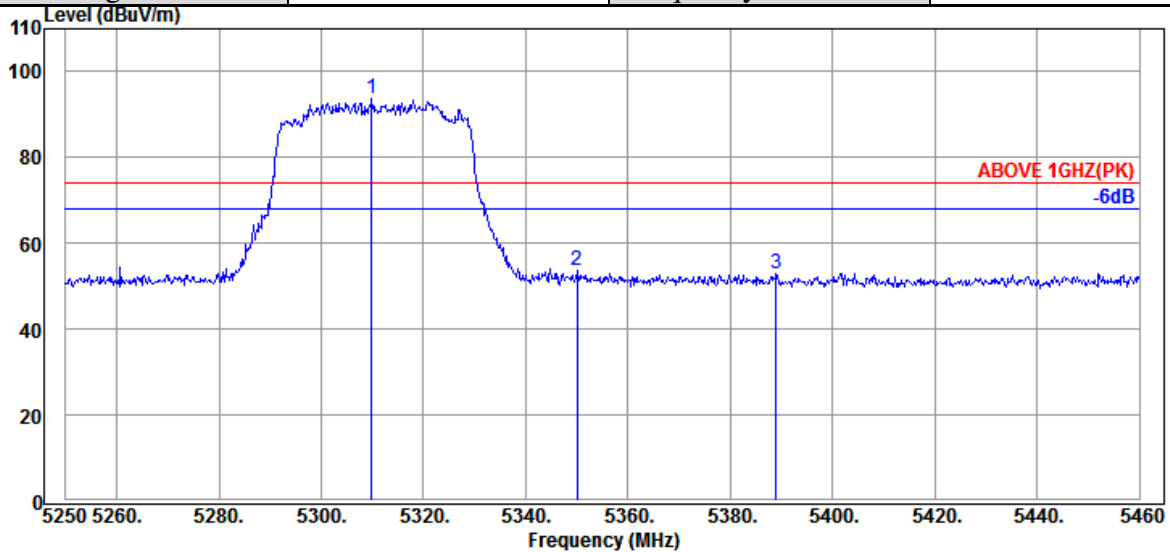

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.850	33.30	9.07	31.63	82.97	93.71	---	---	Peak
5349.960	33.50	9.10	31.63	42.77	53.74	74.00	20.26	Peak
5389.020	33.70	9.13	31.63	41.71	52.91	74.00	21.09	Peak

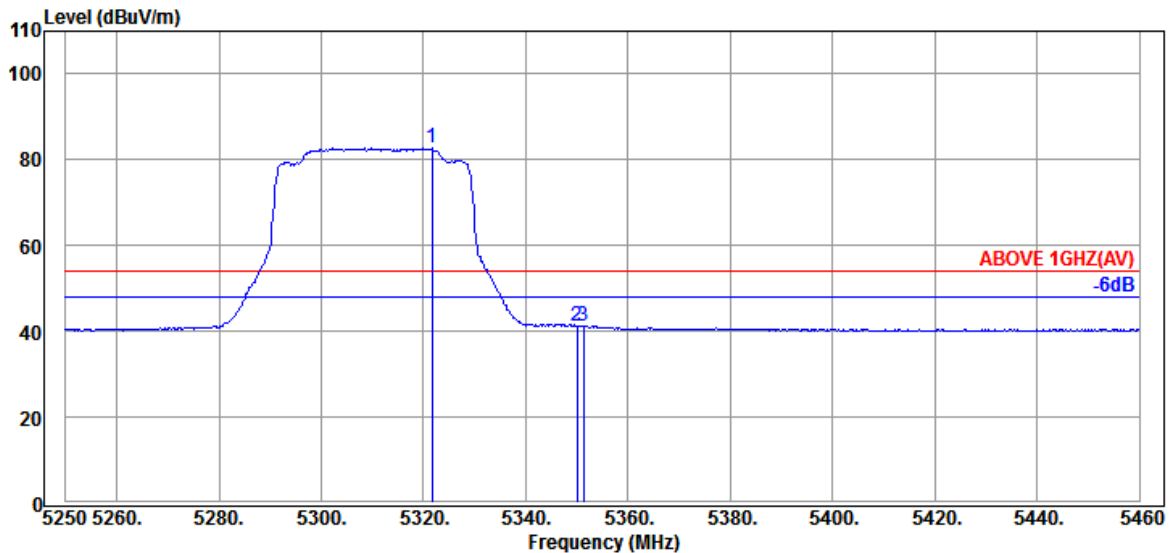


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.610	33.30	9.07	31.63	72.00	82.74	---	---	Average
5349.960	33.50	9.10	31.63	30.28	41.25	54.00	12.75	Average
5351.220	33.50	9.10	31.63	30.30	41.27	54.00	12.73	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

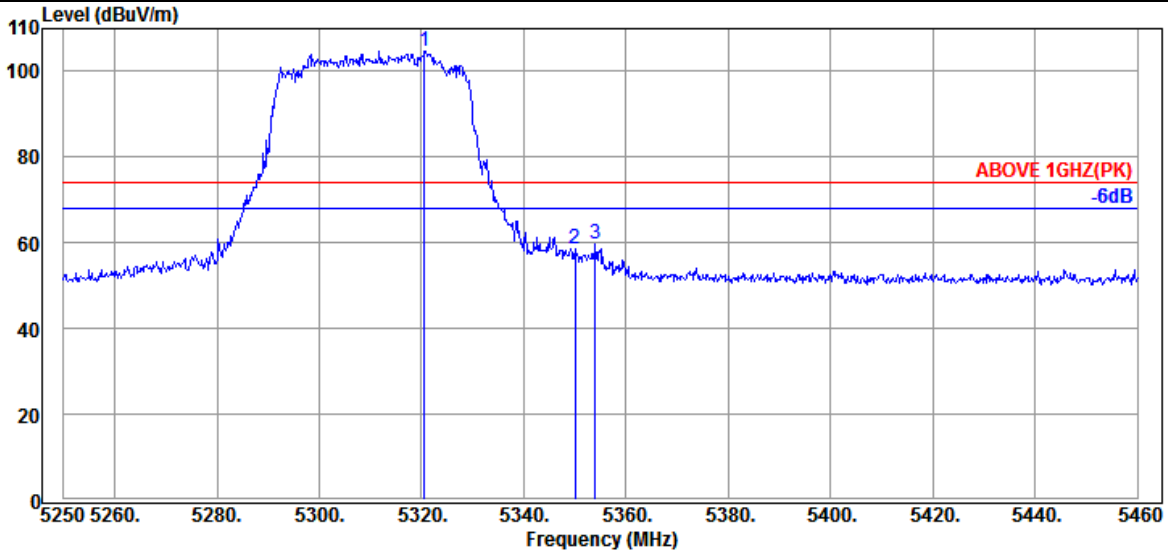

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.560	33.30	9.07	31.63	94.05	104.79	---	---	Peak
5349.960	33.50	9.10	31.63	47.54	58.51	74.00	15.49	Peak
5353.950	33.50	9.10	31.63	48.77	59.74	74.00	14.26	Peak

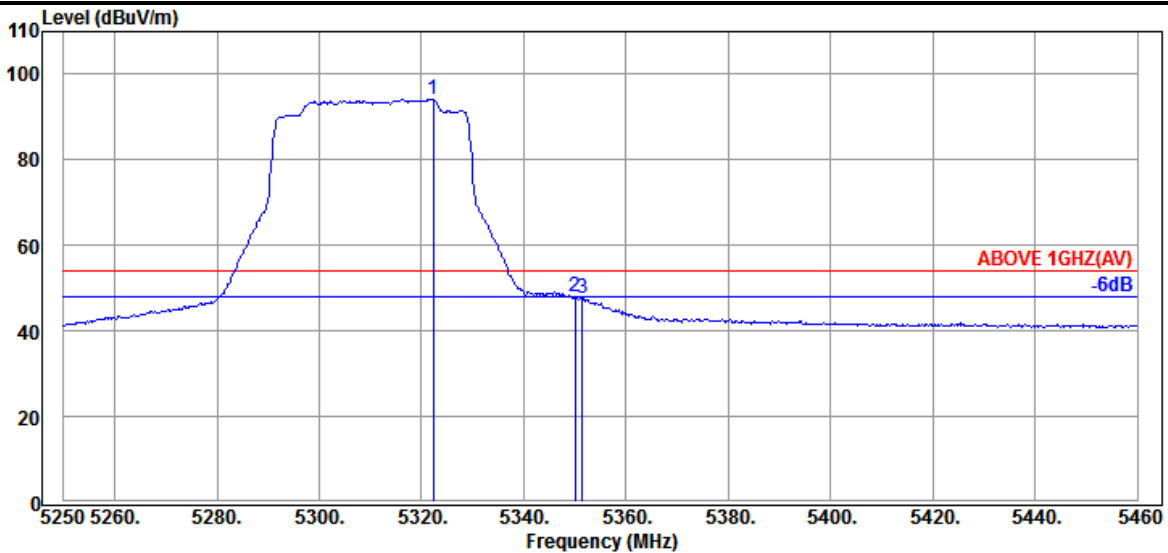


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.240	33.30	9.07	31.63	83.57	94.31	---	---	Average
5349.960	33.50	9.10	31.63	36.93	47.90	54.00	6.10	Average
5351.430	33.50	9.10	31.63	36.83	47.80	54.00	6.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

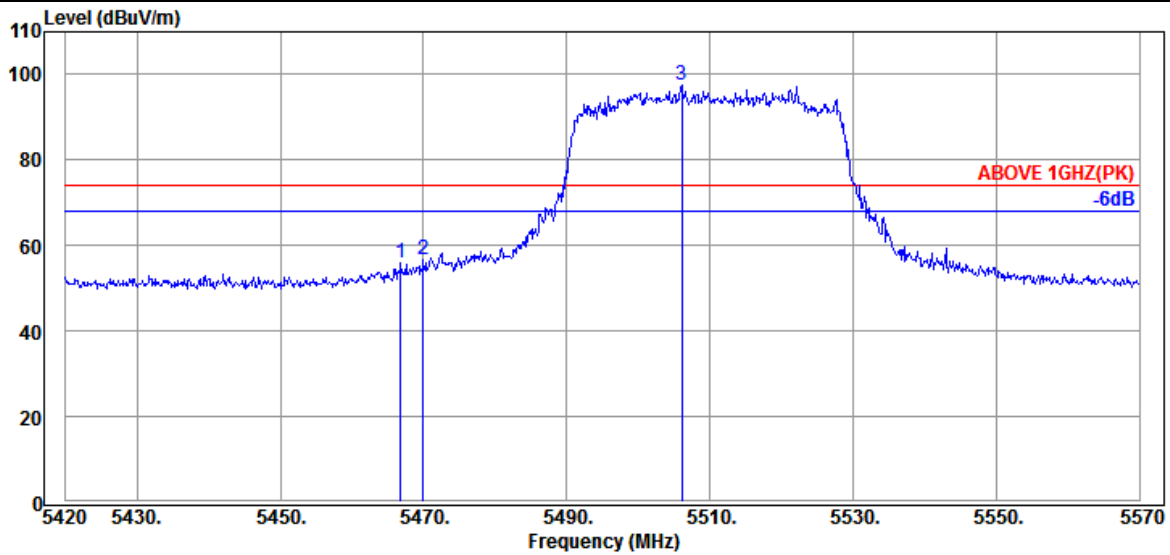

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	33.97	9.20	31.63	44.39	55.93	74.00	18.07	Peak
5469.950	33.97	9.20	31.63	45.32	56.86	74.00	17.14	Peak
@ 5506.100	34.10	9.23	31.64	85.69	97.38	---	---	Peak

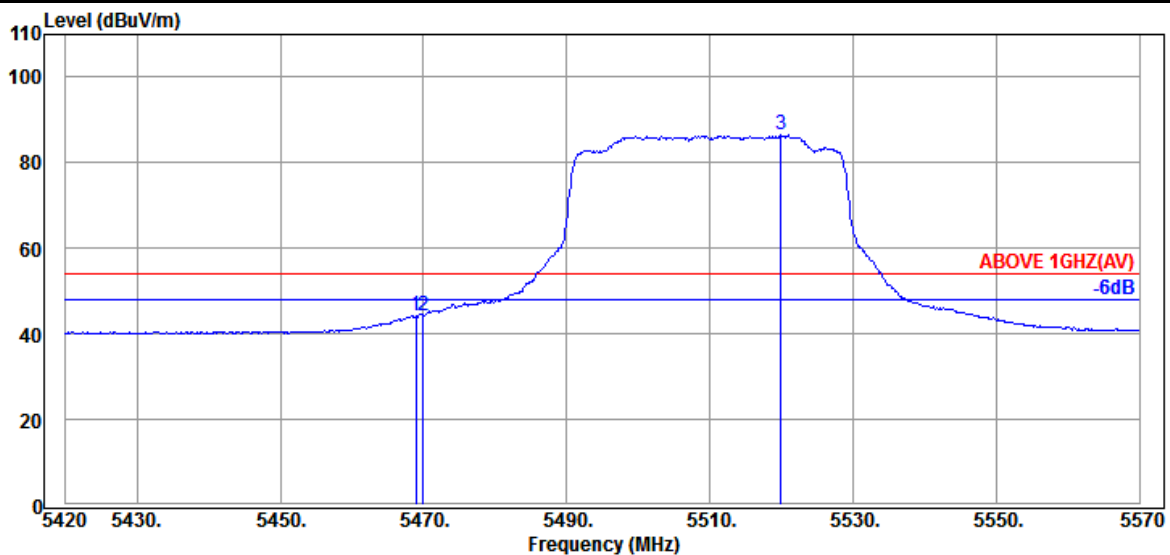


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	33.97	9.20	31.63	32.63	44.17	54.00	9.83	Average
5469.950	33.97	9.20	31.63	32.78	44.32	54.00	9.68	Average
@ 5519.900	34.13	9.24	31.64	74.75	86.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

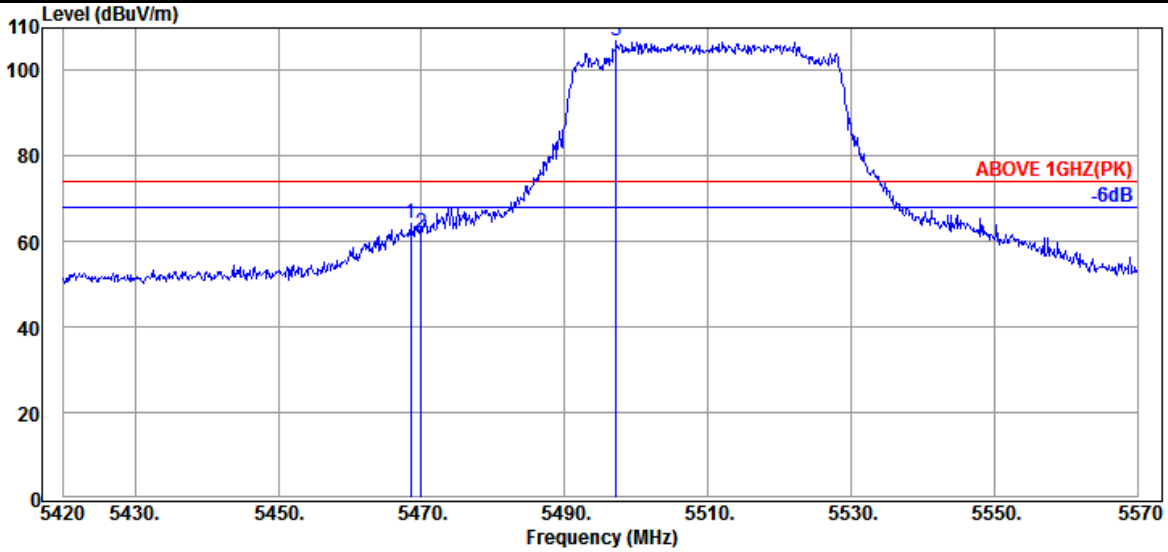

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.450	33.97	9.20	31.63	52.58	64.12	74.00	9.88	Peak
5469.950	33.97	9.20	31.63	50.33	61.87	74.00	12.13	Peak
@ 5497.250	34.10	9.23	31.63	95.23	106.93	---	---	Peak

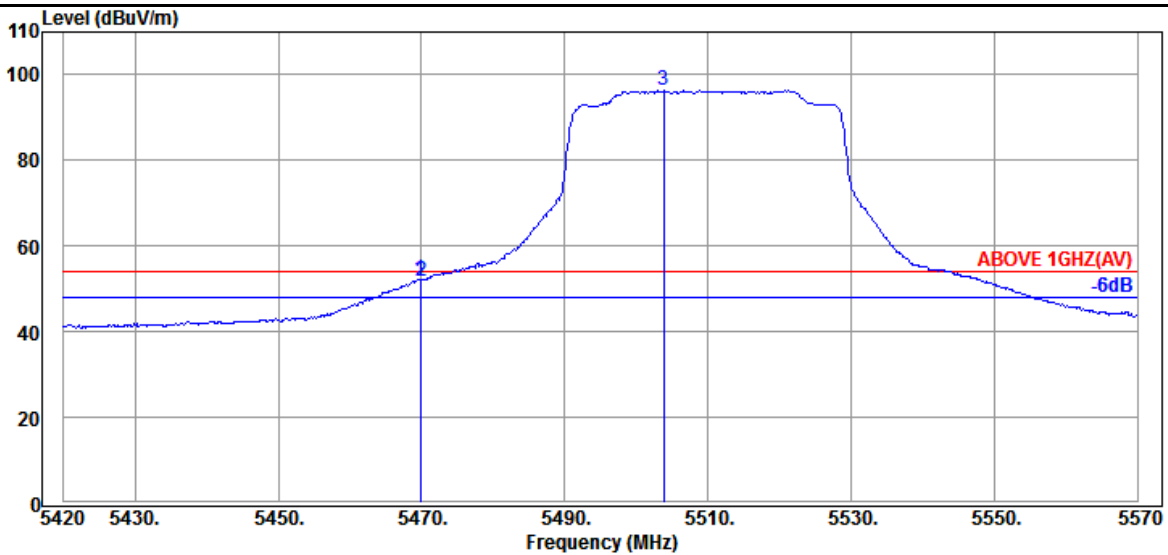


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	33.97	9.20	31.63	40.78	52.32	54.00	1.68	Average
5469.950	33.97	9.20	31.63	40.33	51.87	54.00	2.13	Average
@ 5503.850	34.10	9.23	31.63	84.72	96.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

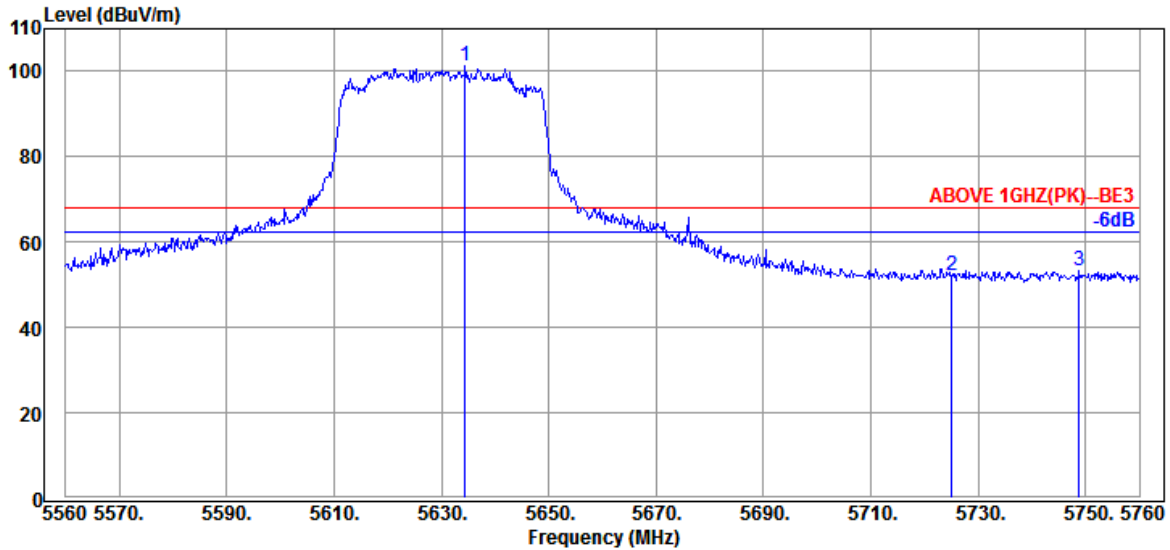

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5634.400	34.27	9.34	31.70	89.37	101.28	---	---	Peak
5725.000	34.50	9.42	31.74	39.98	52.16	68.20	16.04	Peak
5748.800	34.60	9.43	31.75	41.04	53.32	68.20	14.88	Peak

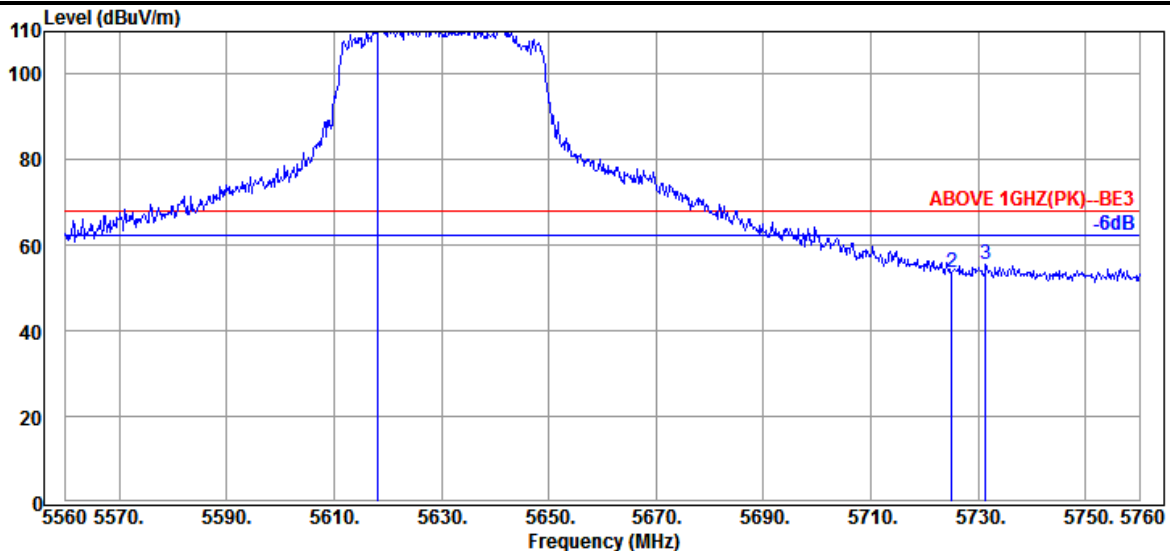


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5618.200	34.23	9.33	31.69	102.19	114.06	---	---	Peak
5725.000	34.50	9.42	31.74	41.67	53.85	68.20	14.35	Peak
5731.400	34.50	9.42	31.75	43.40	55.57	68.20	12.63	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

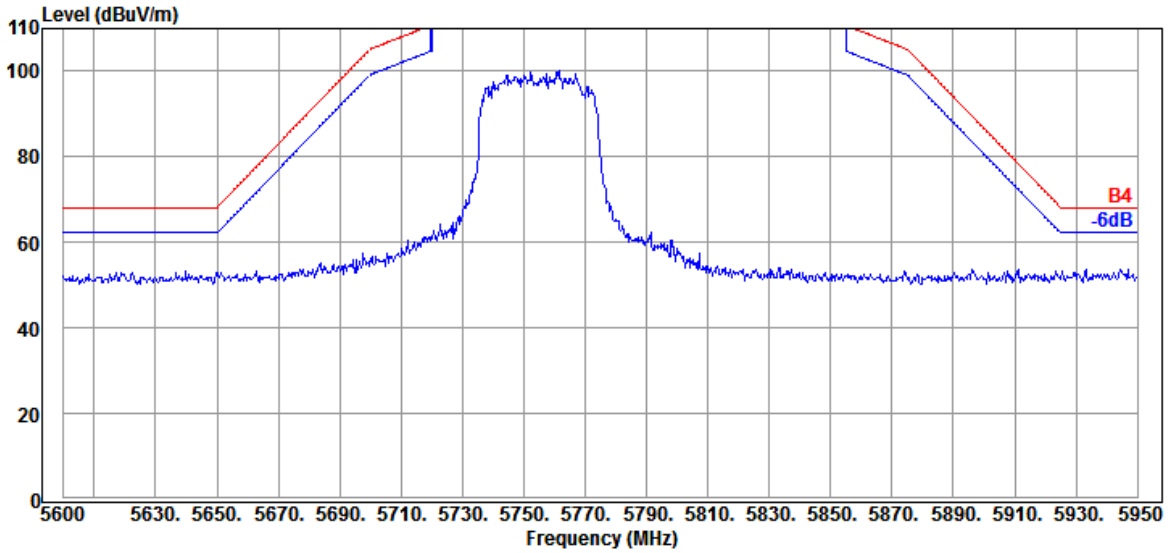


Antenna at Vertical Polarization

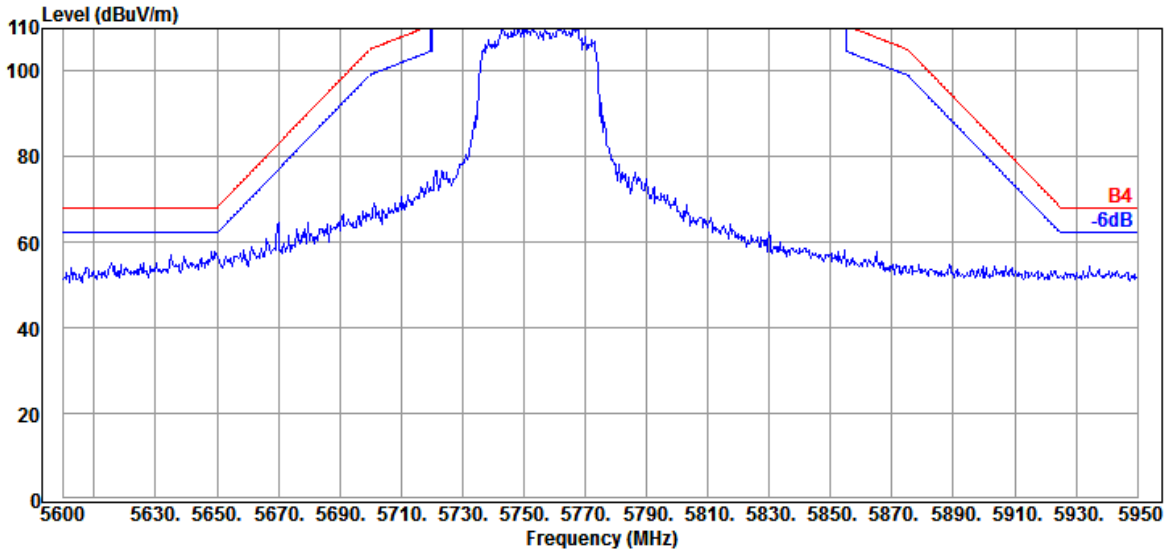


Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

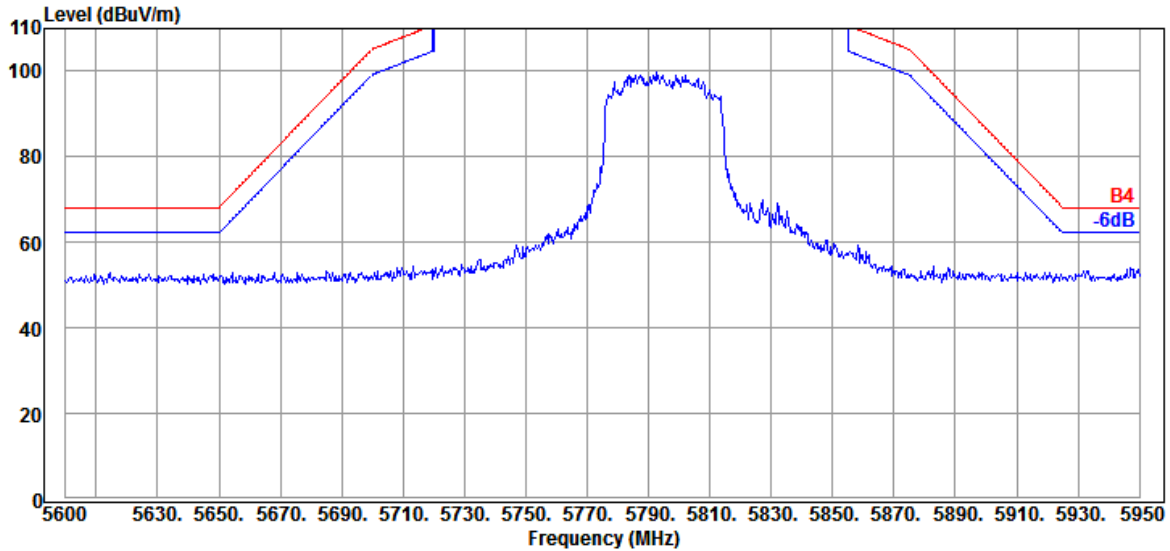

Antenna at Vertical Polarization

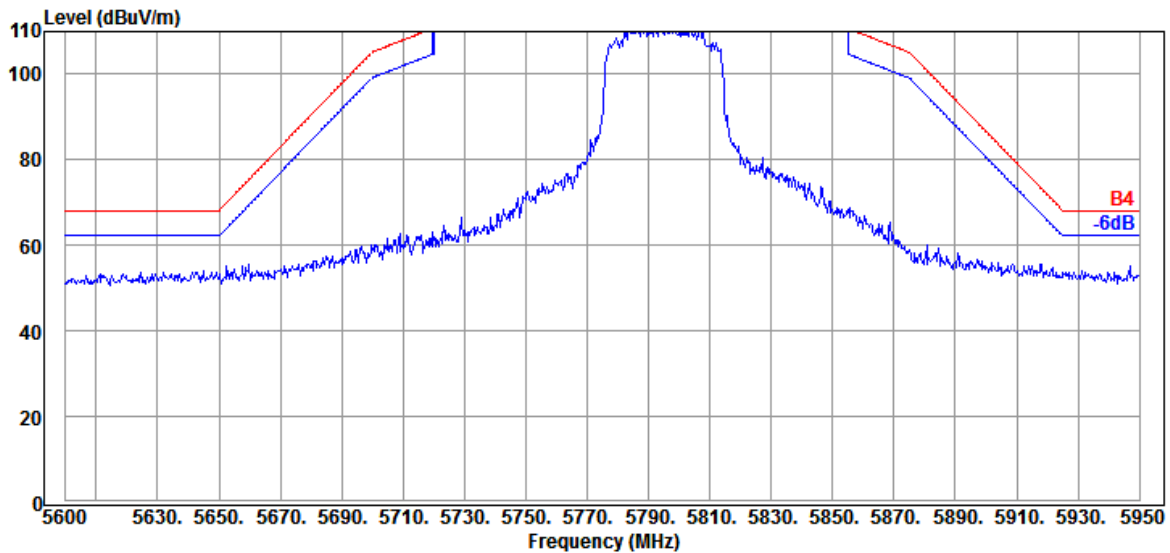


Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

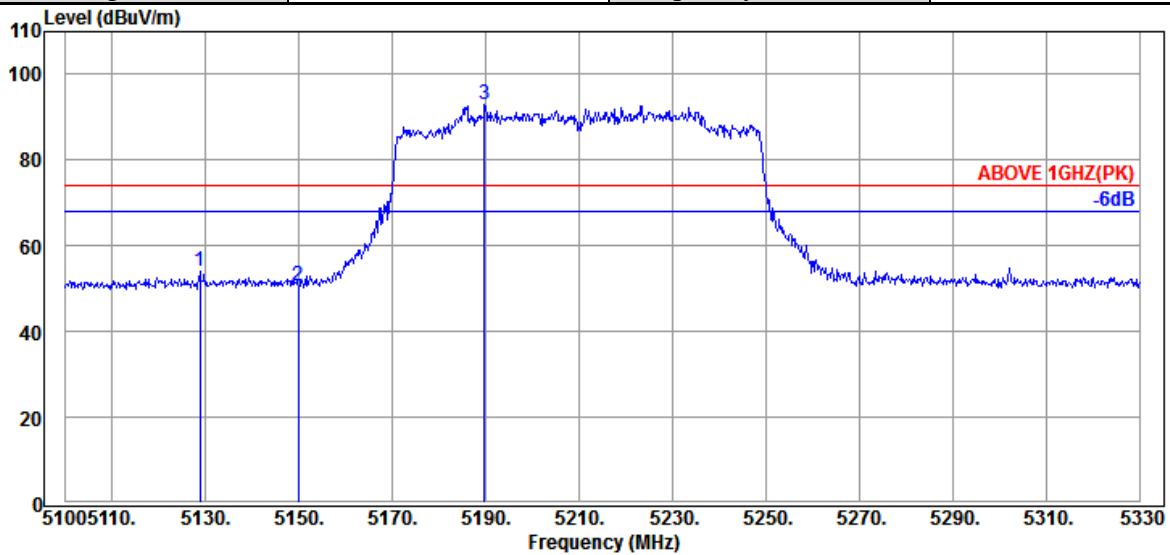

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.750	33.07	8.91	31.63	43.75	54.10	74.00	19.90	Peak
5149.910	33.10	8.92	31.63	40.38	50.77	74.00	23.23	Peak
@ 5189.700	33.20	8.95	31.63	82.32	92.84	---	---	Peak

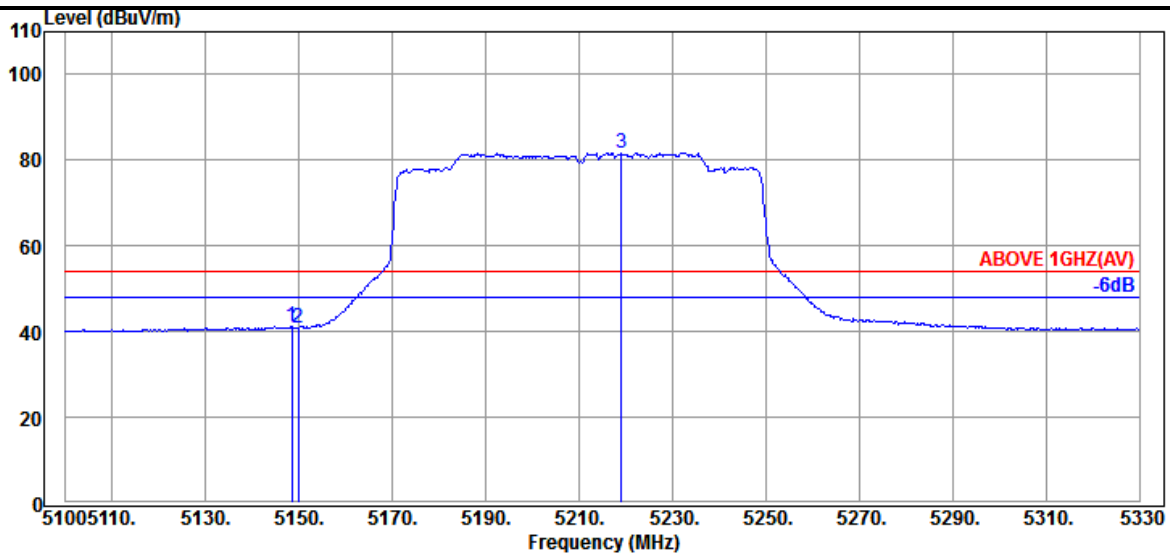


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.530	33.10	8.92	31.63	31.00	41.39	54.00	12.61	Average
5149.910	33.10	8.92	31.63	30.50	40.89	54.00	13.11	Average
@ 5219.140	33.15	8.98	31.63	71.13	81.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

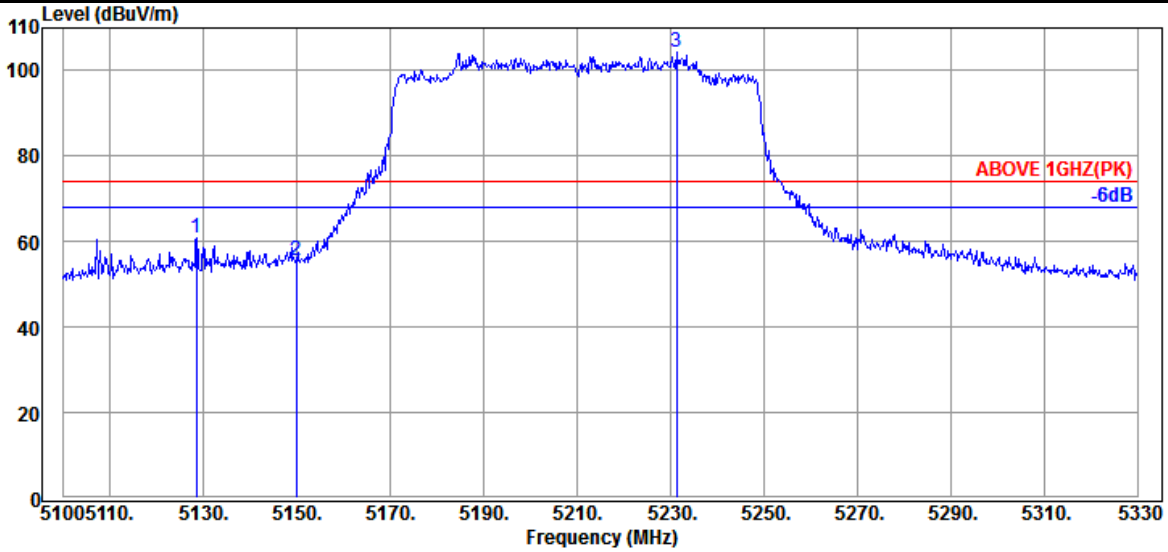

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.520	33.07	8.91	31.63	50.58	60.93	74.00	13.07	Peak
5149.910	33.10	8.92	31.63	45.20	55.59	74.00	18.41	Peak
@ 5231.330	33.15	8.99	31.63	93.67	104.18	---	---	Peak

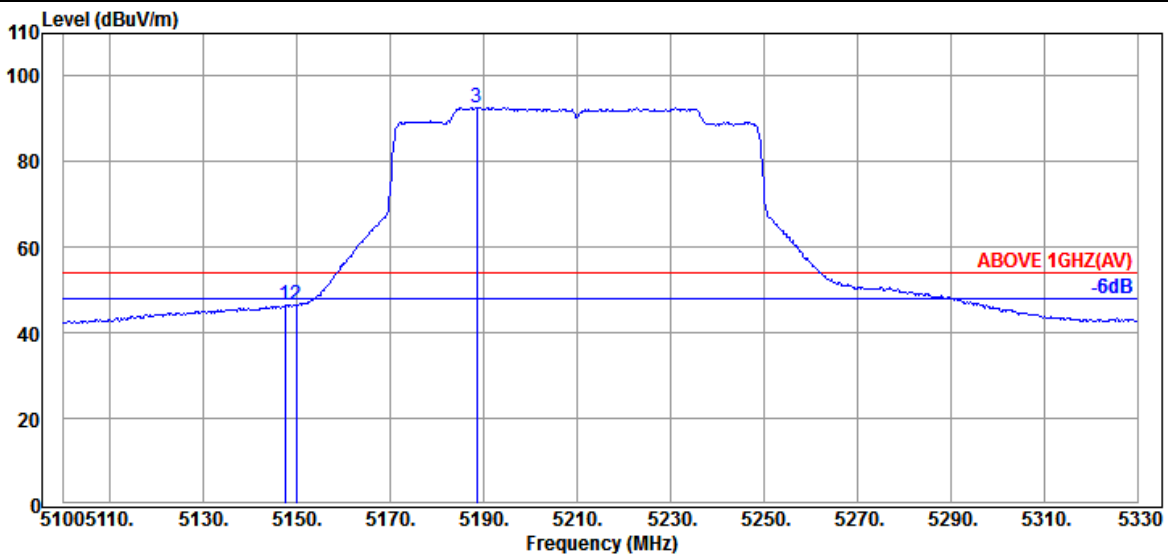


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.380	33.10	8.92	31.63	36.19	46.58	54.00	7.42	Average
5149.910	33.10	8.92	31.63	36.02	46.41	54.00	7.59	Average
@ 5188.550	33.20	8.95	31.63	82.19	92.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

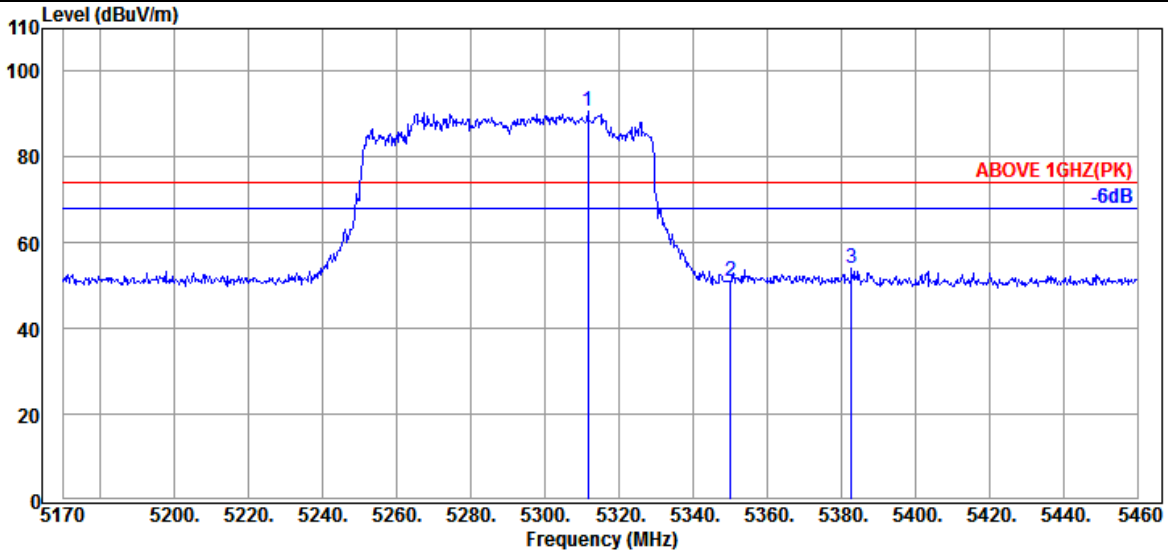

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.520	33.30	9.07	31.63	79.87	90.61	---	---	Peak
5350.090	33.50	9.10	31.63	40.09	51.06	74.00	22.94	Peak
5382.860	33.63	9.13	31.63	42.84	53.97	74.00	20.03	Peak

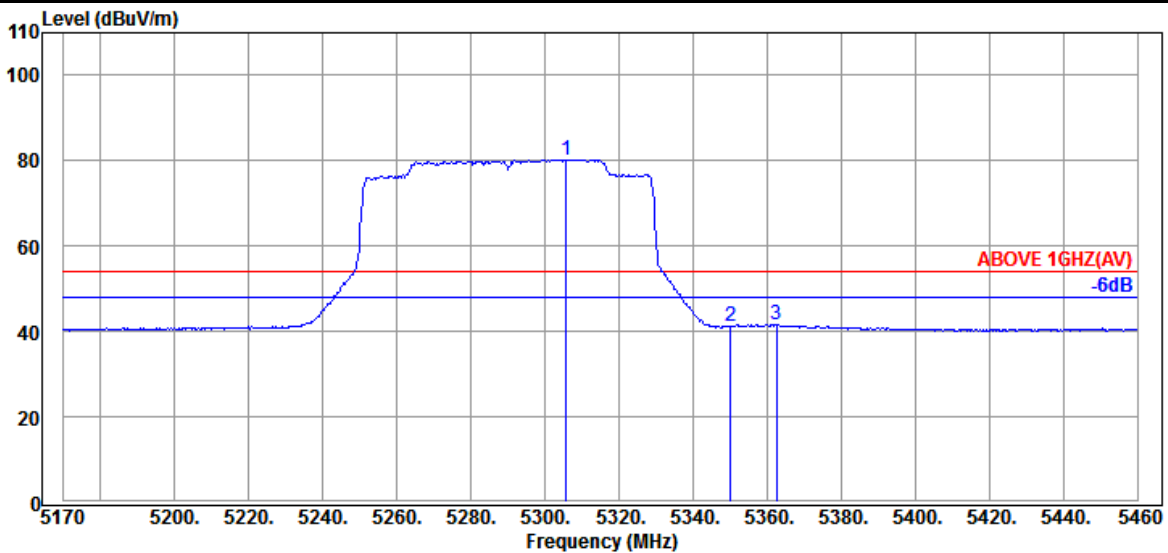


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.720	33.20	9.05	31.63	69.66	80.28	---	---	Average
5350.090	33.50	9.10	31.63	30.17	41.14	54.00	12.86	Average
5362.560	33.57	9.11	31.63	30.59	41.64	54.00	12.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

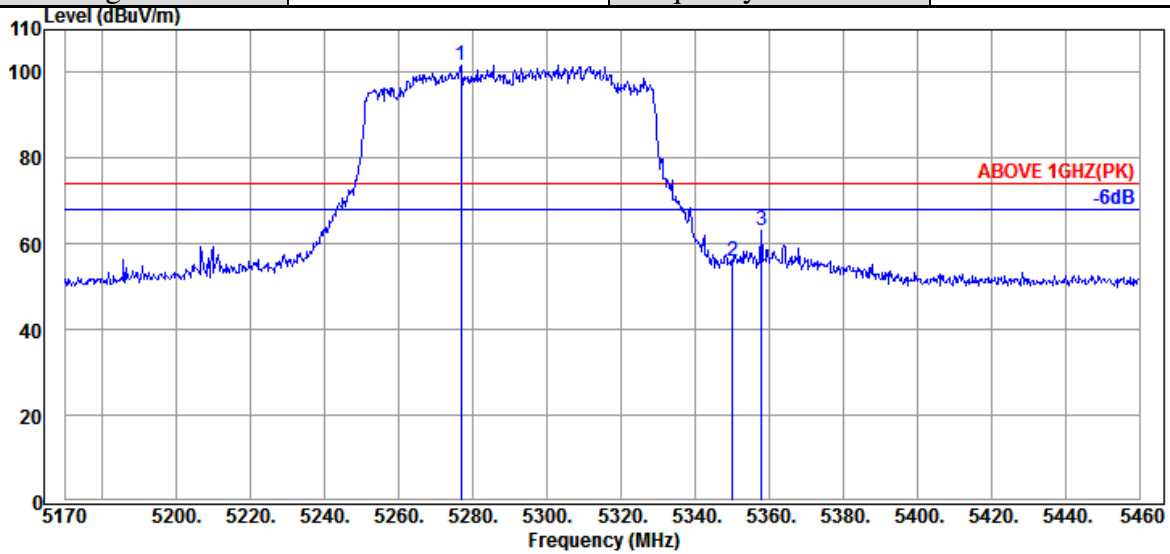

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5276.720	33.13	9.04	31.63	91.07	101.61	---	---	Peak
5350.090	33.50	9.10	31.63	45.11	56.08	74.00	17.92	Peak
5357.920	33.57	9.10	31.63	52.25	63.29	74.00	10.71	Peak

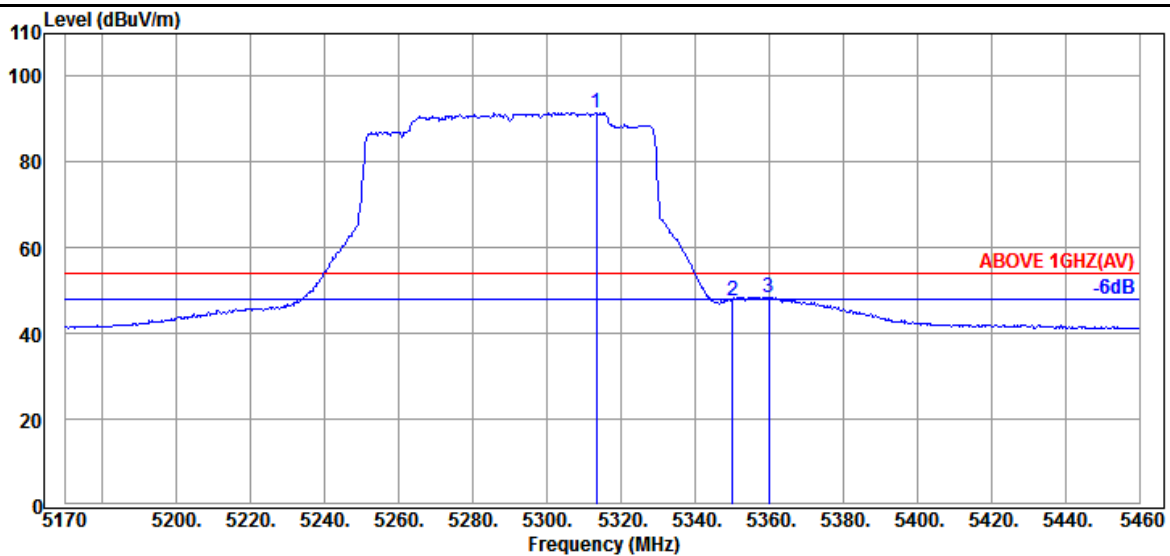


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.260	33.30	9.07	31.63	80.83	91.57	---	---	Average
5350.090	33.50	9.10	31.63	36.77	47.74	54.00	6.26	Average
5359.950	33.57	9.10	31.63	37.48	48.52	54.00	5.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

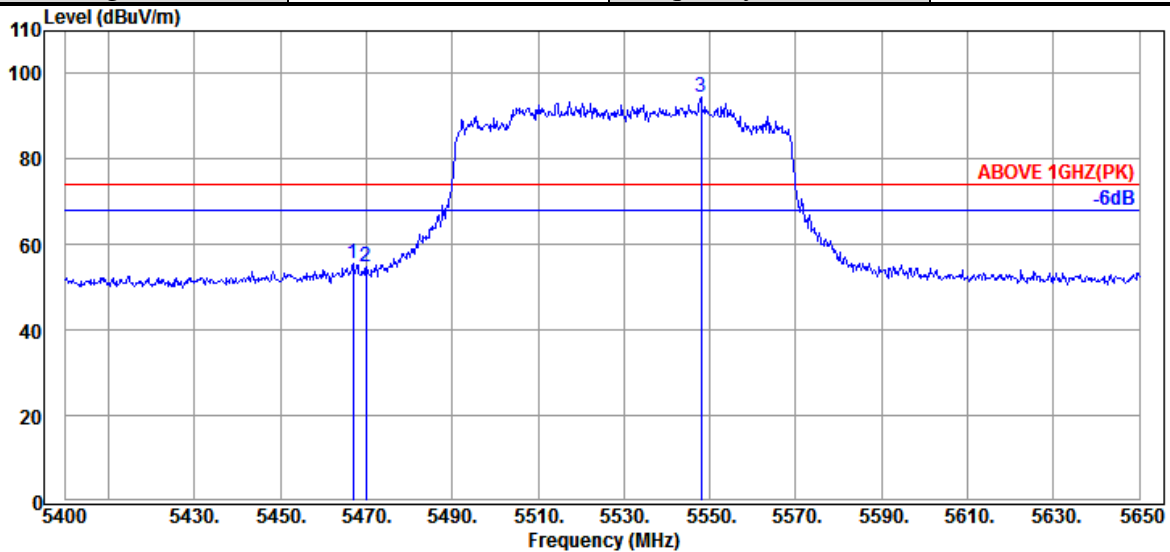

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	33.97	9.20	31.63	43.99	55.53	74.00	18.47	Peak
5470.000	33.97	9.20	31.63	43.23	54.77	74.00	19.23	Peak
@ 5548.000	34.20	9.27	31.66	82.55	94.36	---	---	Peak

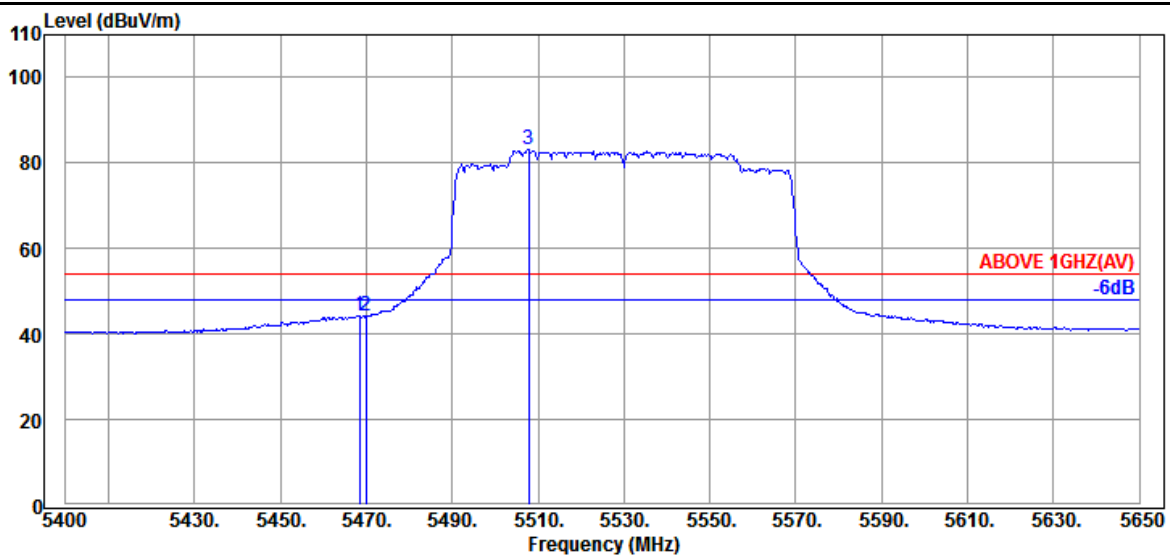


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	33.97	9.20	31.63	32.82	44.36	54.00	9.64	Average
5470.000	33.97	9.20	31.63	32.51	44.05	54.00	9.95	Average
@ 5507.750	34.10	9.23	31.64	71.36	83.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

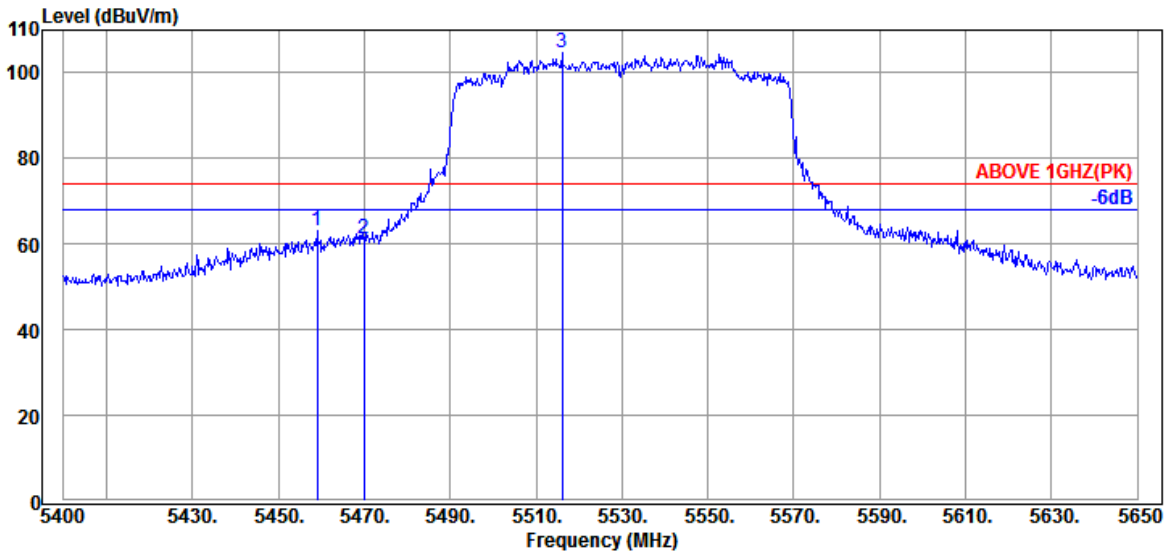

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	33.90	9.18	31.63	51.54	62.99	74.00	11.01	Peak
5470.000	33.97	9.20	31.63	49.84	61.38	74.00	12.62	Peak
@ 5516.000	34.13	9.24	31.64	92.87	104.60	---	---	Peak

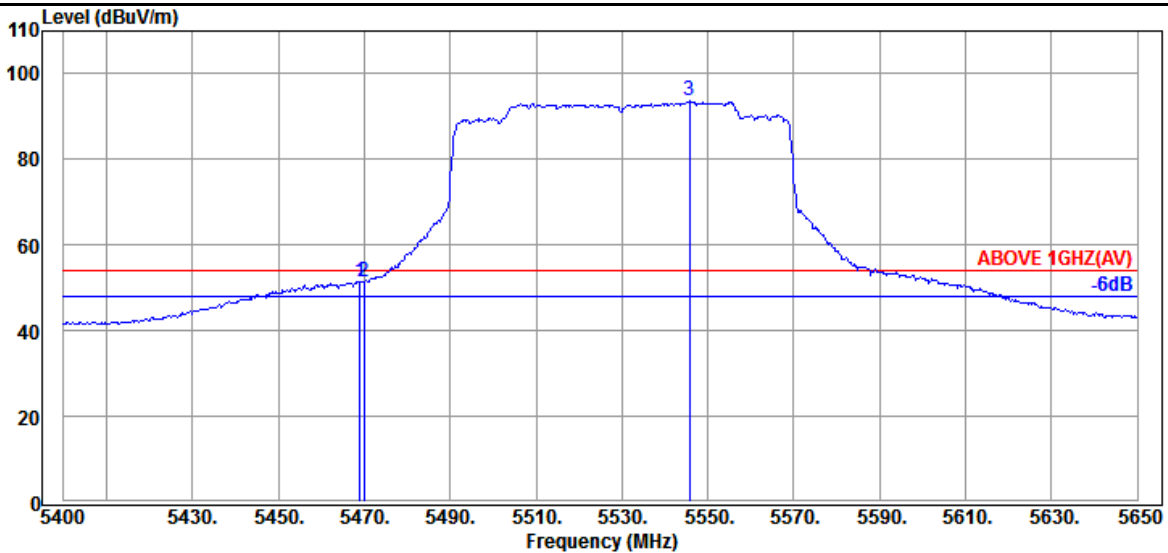


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	33.97	9.20	31.63	39.90	51.44	54.00	2.56	Average
5470.000	33.97	9.20	31.63	39.88	51.42	54.00	2.58	Average
@ 5545.750	34.20	9.26	31.66	81.86	93.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

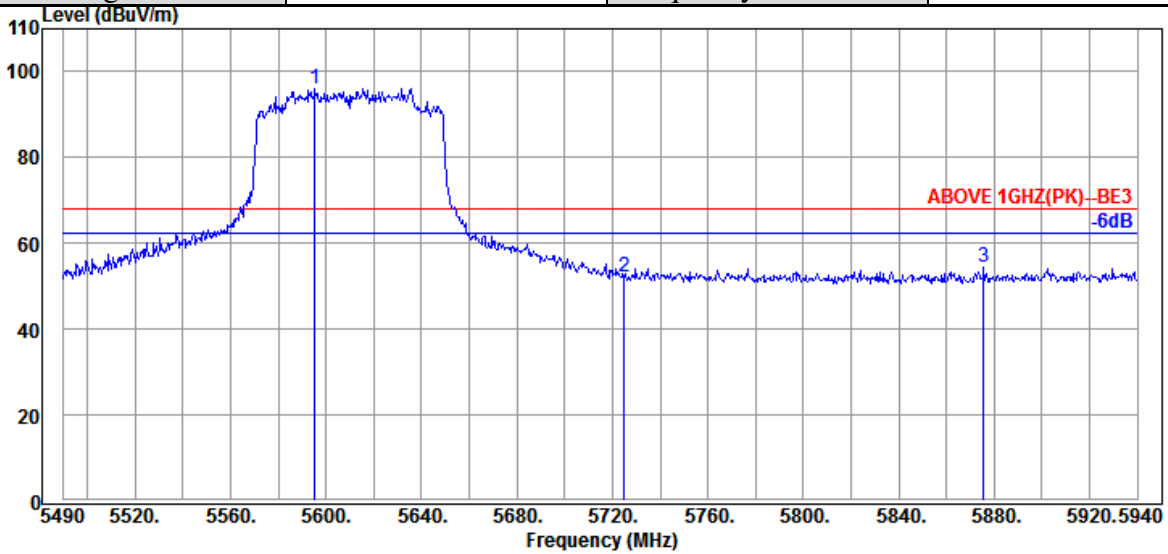

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.300	34.20	9.30	31.67	84.28	96.11	---	---	Peak
5724.900	34.50	9.42	31.74	39.95	52.13	68.20	16.07	Peak
5875.650	35.07	9.55	31.81	41.75	54.56	68.20	13.64	Peak

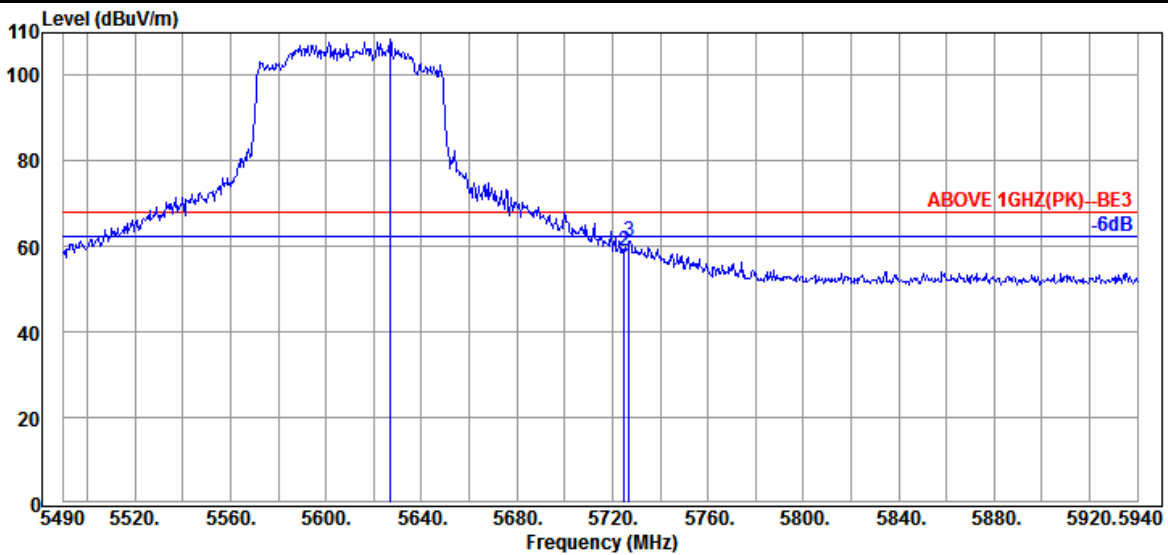

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.800	34.27	9.33	31.69	96.70	108.61	---	---	Peak
5724.900	34.50	9.42	31.74	46.88	59.06	68.20	9.14	Peak
5727.150	34.50	9.42	31.75	49.01	61.18	68.20	7.02	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.57	13.10	33.43	29.45	47.69	54.00	6.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.57	13.10	33.43	29.67	47.91	54.00	6.09	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.80	13.21	33.49	29.40	47.92	54.00	6.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.80	13.21	33.49	29.41	47.93	54.00	6.07	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	30.40	49.07	54.00	4.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.87	48.54	54.00	5.46	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.71	49.29	54.00	4.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.21	48.79	54.00	5.21	Peak

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.00	14.28	33.63	28.82	48.47	54.00	5.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.00	14.28	33.63	30.25	49.90	54.00	4.10	Peak

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 518MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.43	13.00	33.32	29.13	47.24	54.00	6.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.43	13.00	33.32	28.57	46.68	54.00	7.32	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.80	13.21	33.49	29.09	47.61	54.00	6.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.80	13.21	33.49	29.21	47.73	54.00	6.27	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.01	47.68	54.00	6.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.50	48.17	54.00	5.83	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.30	48.88	54.00	5.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.34	48.92	54.00	5.08	Peak

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.07	14.51	33.59	30.99	50.98	54.00	3.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	39.07	14.51	33.59	29.82	49.81	54.00	4.19	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.55	13.07	33.40	29.45	47.67	54.00	6.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.55	13.07	33.40	30.08	48.30	54.00	5.70	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.67	13.15	33.48	29.24	47.58	54.00	6.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.67	13.15	33.48	29.72	48.06	54.00	5.94	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.93	14.06	33.65	29.16	48.50	54.00	5.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.93	14.06	33.65	28.74	48.08	54.00	5.92	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.00	14.18	33.64	28.78	48.32	54.00	5.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.00	14.18	33.64	29.66	49.20	54.00	4.80	Peak

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.00	14.31	33.62	30.01	49.70	54.00	4.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.00	14.31	33.62	28.84	48.53	54.00	5.47	Peak

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.53	13.04	33.38	29.54	47.73	54.00	6.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.53	13.04	33.38	29.26	47.45	54.00	6.55	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.73	13.19	33.49	28.82	47.25	54.00	6.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.73	13.19	33.49	29.08	47.51	54.00	6.49	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.88	33.66	29.94	48.96	54.00	5.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.88	33.66	29.60	48.62	54.00	5.38	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.97	14.13	33.64	28.35	47.81	54.00	6.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.97	14.13	33.64	29.34	48.80	54.00	5.20	Peak

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	14.38	33.61	28.78	48.58	54.00	5.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	14.38	33.61	29.57	49.37	54.00	4.63	Peak

Mode	802.11ac-VHT160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10500.000	38.60	13.12	33.46	29.98	48.24	54.00	5.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
10500.000	38.60	13.12	33.46	28.45	46.71	54.00	7.29	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.000	38.80	13.75	33.66	29.56	48.45	54.00	5.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
11140.000	38.80	13.75	33.66	29.26	48.15	54.00	5.85	Peak

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.43	13.00	33.32	29.38	47.49	54.00	6.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.43	13.00	33.32	28.60	46.71	54.00	7.29	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.80	13.21	33.49	28.45	46.97	54.00	7.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.80	13.21	33.49	29.32	47.84	54.00	6.16	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.30	47.97	54.00	6.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.80	13.55	33.68	29.37	48.04	54.00	5.96	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	28.61	48.19	54.00	5.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.00	14.21	33.63	29.22	48.80	54.00	5.20	Peak

Mode	802.11ax-HE20	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.07	14.41	33.61	29.38	49.25	54.00	4.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.07	14.41	33.61	30.49	50.36	54.00	3.64	Peak

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.55	13.07	33.40	28.68	46.90	54.00	7.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.55	13.07	33.40	28.22	46.44	54.00	7.56	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.67	13.15	33.48	29.30	47.64	54.00	6.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.67	13.15	33.48	28.46	46.80	54.00	7.20	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.93	14.06	33.65	28.46	47.80	54.00	6.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.93	14.06	33.65	27.93	47.27	54.00	6.73	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.00	14.18	33.64	28.49	48.03	54.00	5.97	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.00	14.18	33.64	27.73	47.27	54.00	6.73	Peak

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	14.43	33.60	29.10	49.03	54.00	4.97	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	39.10	14.43	33.60	29.30	49.23	54.00	4.77	Peak

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.53	13.04	33.38	28.61	46.80	54.00	7.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.53	13.04	33.38	28.84	47.03	54.00	6.97	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.73	13.19	33.49	27.95	46.38	54.00	7.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.73	13.19	33.49	28.11	46.54	54.00	7.46	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.88	33.66	28.98	48.00	54.00	6.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.80	13.88	33.66	28.33	47.35	54.00	6.65	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.97	14.13	33.64	27.97	47.43	54.00	6.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.97	14.13	33.64	28.70	48.16	54.00	5.84	Peak

Mode	802.11ax-HE80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	14.38	33.61	29.58	49.38	54.00	4.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.03	14.38	33.61	30.25	50.05	54.00	3.95	Peak

Mode	802.11ax-HE160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.60	13.12	33.46	29.08	47.34	54.00	6.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.60	13.12	33.46	28.57	46.83	54.00	7.17	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.80	13.75	33.66	29.20	48.09	54.00	5.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.80	13.75	33.66	28.58	47.47	54.00	6.53	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.