


## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>6</b>
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	178
A.2.3 Emissions in Non-restricted Frequency Bands:.....	190
<b>A.3 DTS/OCCUPIED BANDWIDTH</b> .....	<b>191</b>
A.3.1 DTS/Occupied Bandwidth Result.....	191
A.3.2 Measurement Plots .....	193
<b>A.4 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>209</b>
A.4.1 Peak Output Power .....	209
A.4.2 Average Output Power (Reporting only).....	217
A.4.3 Measurement Plots .....	223
<b>A.5 EMISSION LIMITATIONS</b> .....	<b>225</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>251</b>
A.6.1 Power Spectral Density Result .....	251
A.6.2 Measurement Plots .....	254

## A.1 CONDUCTED EMISSION

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1		

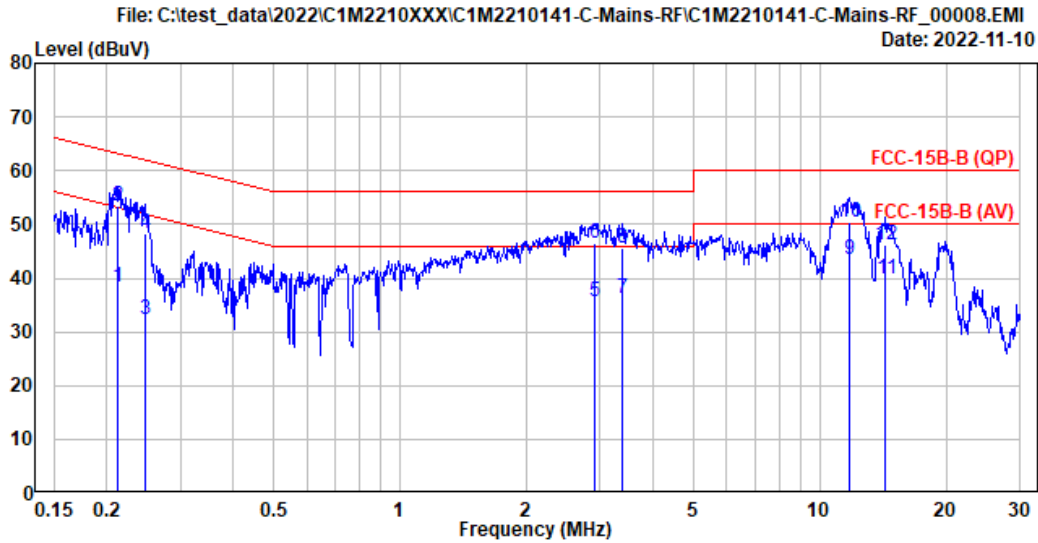


Site No.	: No.8 Shielded Room	Data No.	: 8
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 16Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.213	10.32	0.03	9.85	18.21	38.41	53.10	14.69	Average
2	0.213	10.32	0.03	9.85	33.33	53.53	63.10	9.57	QP
3	0.248	10.32	0.03	9.85	12.09	32.29	51.82	19.53	Average
4	0.248	10.32	0.03	9.85	28.03	48.23	61.82	13.59	QP
5	2.911	10.38	0.07	9.86	15.46	35.77	46.00	10.23	Average
6	2.911	10.38	0.07	9.86	26.14	46.45	56.00	9.55	QP
7	3.398	10.39	0.08	9.86	15.84	36.17	46.00	9.83	Average
8	3.398	10.39	0.08	9.86	25.35	45.68	56.00	10.32	QP
9	11.753	10.73	0.15	9.90	22.77	43.55	50.00	6.45	Average
10	11.753	10.73	0.15	9.90	29.61	50.39	60.00	9.61	QP
11	14.347	10.85	0.17	9.91	18.90	39.83	50.00	10.17	Average
12	14.347	10.85	0.17	9.91	25.14	46.07	60.00	13.93	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1		

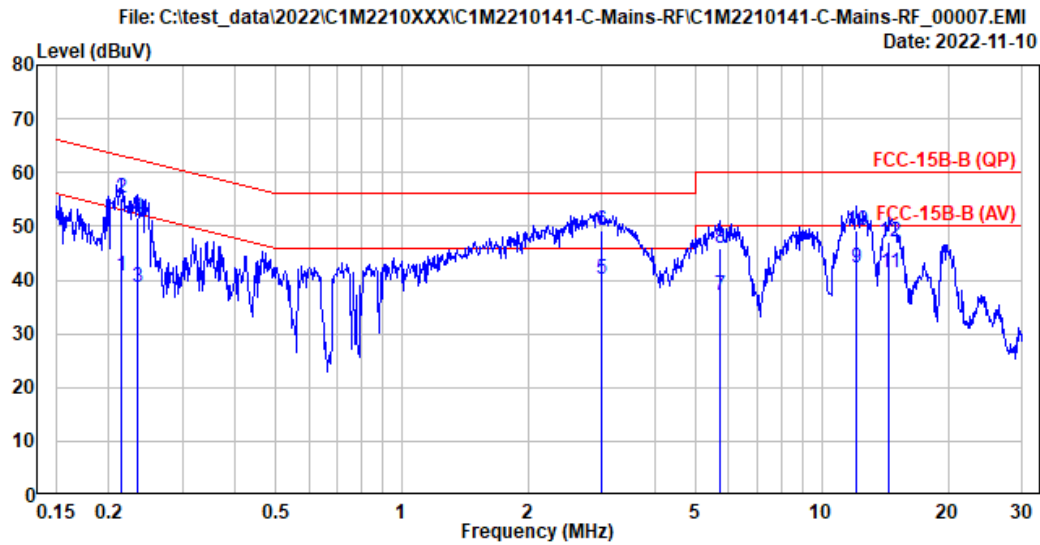


Site No.	: No.8 Shielded Room	Data No.	: 7
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 16Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.214	10.22	0.03	9.85	20.54	40.64	53.06	12.42	Average
2	0.214	10.22	0.03	9.85	35.19	55.29	63.06	7.77	QP
3	0.234	10.22	0.03	9.85	18.69	38.79	52.32	13.53	Average
4	0.234	10.22	0.03	9.85	31.64	51.74	62.32	10.58	QP
5	2.985	10.27	0.07	9.86	19.89	40.09	46.00	5.91	Average
6	2.985	10.27	0.07	9.86	28.88	49.08	56.00	6.92	QP
7	5.705	10.33	0.10	9.87	16.97	37.27	50.00	12.73	Average
8	5.705	10.33	0.10	9.87	25.45	45.75	60.00	14.25	QP
9	12.110	10.48	0.15	9.90	21.75	42.28	50.00	7.72	Average
10	12.110	10.48	0.15	9.90	28.59	49.12	60.00	10.88	QP
11	14.490	10.54	0.17	9.91	20.76	41.38	50.00	8.62	Average
12	14.490	10.54	0.17	9.91	26.54	47.16	60.00	12.84	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2		

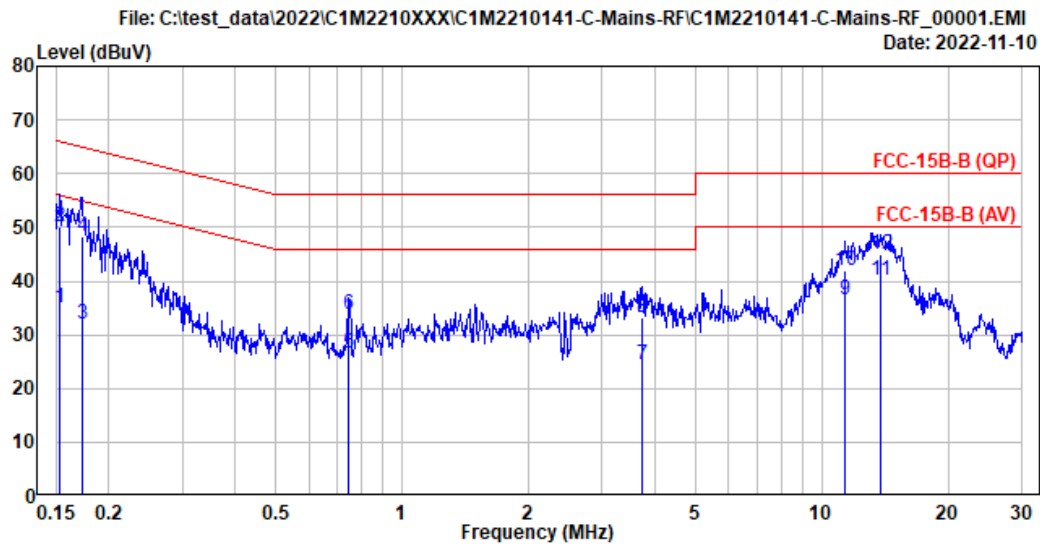

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 16Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.153	10.34	0.03	9.85	14.68	34.90	55.83	20.93	Average
2	0.153	10.34	0.03	9.85	29.90	50.12	65.83	15.71	QP
3	0.172	10.33	0.03	9.85	11.87	32.08	54.84	22.76	Average
4	0.172	10.33	0.03	9.85	27.96	48.17	64.84	16.67	QP
5	0.747	10.33	0.04	9.85	6.20	26.42	46.00	19.58	Average
6	0.747	10.33	0.04	9.85	13.71	33.93	56.00	22.07	QP
7	3.735	10.40	0.08	9.86	4.04	24.38	46.00	21.62	Average
8	3.735	10.40	0.08	9.86	12.88	33.22	56.00	22.78	QP
9	11.407	10.71	0.15	9.90	15.80	36.56	50.00	13.44	Average
10	11.407	10.71	0.15	9.90	21.32	42.08	60.00	17.92	QP
11	13.786	10.82	0.16	9.91	19.19	40.08	50.00	9.92	Average
12	13.786	10.82	0.16	9.91	24.20	45.09	60.00	14.91	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2		

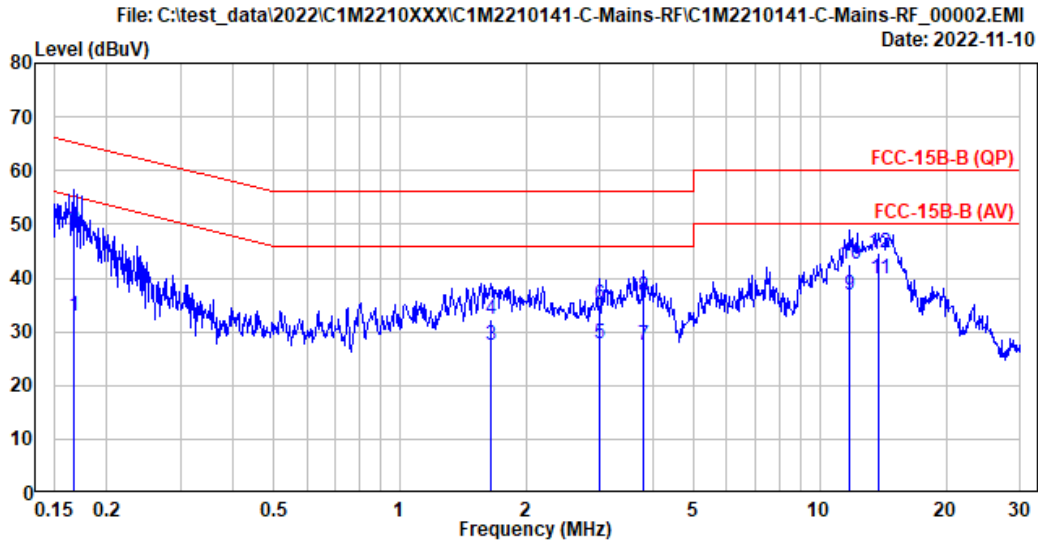

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 16Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.167	10.22	0.03	9.85	12.90	33.00	55.09	22.09	Average
2	0.167	10.22	0.03	9.85	28.74	48.84	65.09	16.25	QP
3	1.641	10.24	0.05	9.86	7.28	27.43	46.00	18.57	Average
4	1.641	10.24	0.05	9.86	12.23	32.38	56.00	23.62	QP
5	3.000	10.27	0.07	9.86	7.61	27.81	46.00	18.19	Average
6	3.000	10.27	0.07	9.86	14.73	34.93	56.00	21.07	QP
7	3.791	10.28	0.08	9.86	7.14	27.36	46.00	18.64	Average
8	3.791	10.28	0.08	9.86	16.18	36.40	56.00	19.60	QP
9	11.812	10.47	0.15	9.90	16.19	36.71	50.00	13.29	Average
10	11.812	10.47	0.15	9.90	22.08	42.60	60.00	17.40	QP
11	13.855	10.52	0.16	9.91	19.23	39.82	50.00	10.18	Average
12	13.855	10.52	0.16	9.91	24.20	44.79	60.00	15.21	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## A.2 RADIATED EMISSION

Test Date	2022/10/17 ~ 12/12	Temp./Hum.	20 ~ 24°C/52 ~ 63%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

● **Test SKU #1**

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.70	1.48	26.48	32.20	29.90	40.00	10.10	Peak
105.660	17.20	2.68	26.25	32.78	26.41	43.50	17.09	Peak
160.950	16.28	3.31	25.95	36.96	30.60	43.50	12.90	Peak
216.240	16.43	3.89	25.75	35.94	30.51	46.00	15.49	Peak
378.230	21.18	5.69	26.28	36.94	37.53	46.00	8.47	Peak
485.900	23.24	6.65	27.04	35.85	38.70	46.00	7.30	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.32	1.53	0.00	14.91	38.76	40.00	1.24	Peak
46.490	15.84	1.76	26.46	46.69	37.83	40.00	2.17	Peak
103.720	17.09	2.66	26.26	35.10	28.59	43.50	14.91	Peak
175.500	15.69	3.47	25.88	40.34	33.62	43.50	9.88	Peak
378.230	21.18	5.69	26.28	36.67	37.26	46.00	8.74	Peak
485.900	23.24	6.65	27.04	36.38	39.23	46.00	6.77	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	22.50	1.51	26.48	32.71	30.24	40.00	9.76	Peak
102.750	17.02	2.65	26.27	33.68	27.08	43.50	16.42	Peak
162.890	16.21	3.33	25.93	38.39	32.00	43.50	11.50	Peak
214.300	16.33	3.88	25.76	36.14	30.59	43.50	12.91	Peak
378.230	21.18	5.69	26.28	37.04	37.63	46.00	8.37	Peak
485.900	23.24	6.65	27.04	36.97	39.82	46.00	6.18	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	22.50	1.51	0.00	14.86	38.87	40.00	1.13	Peak
46.490	15.84	1.76	26.46	47.22	38.36	40.00	1.64	Peak
99.840	16.84	2.61	26.29	36.46	29.62	43.50	13.88	Peak
165.800	16.07	3.37	25.92	40.39	33.91	43.50	9.59	Peak
378.230	21.18	5.69	26.28	36.91	37.50	46.00	8.50	Peak
485.900	23.24	6.65	27.04	36.66	39.51	46.00	6.49	Peak

● Test SKU #2

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.70	1.48	26.48	32.14	29.84	40.00	10.16	Peak
103.720	17.09	2.66	26.26	32.36	25.85	43.50	17.65	Peak
166.770	16.05	3.37	25.92	35.47	28.97	43.50	14.53	Peak
214.300	16.33	3.88	25.76	35.73	30.18	43.50	13.32	Peak
378.230	21.18	5.69	26.28	37.01	37.60	46.00	8.40	Peak
485.900	23.24	6.65	27.04	36.04	38.89	46.00	7.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.32	1.53	0.00	14.84	38.69	40.00	1.31	Peak
46.490	15.84	1.76	26.46	47.65	38.79	40.00	1.21	Peak
119.240	18.00	2.85	26.16	34.22	28.91	43.50	14.59	Peak
170.650	15.88	3.42	25.90	39.36	32.76	43.50	10.74	Peak
378.230	21.18	5.69	26.28	36.49	37.08	46.00	8.92	Peak
485.900	23.24	6.65	27.04	36.75	39.60	46.00	6.40	Peak



Mode	BLE (2M)	Frequency	TX 2440MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.70	1.48	26.48	32.56	30.26	40.00	9.74	Peak
106.630	17.27	2.70	26.24	33.38	27.11	43.50	16.39	Peak
165.800	16.07	3.37	25.92	36.51	30.03	43.50	13.47	Peak
212.360	16.18	3.85	25.76	37.07	31.34	43.50	12.16	Peak
378.230	21.18	5.69	26.28	37.21	37.80	46.00	8.20	Peak
485.900	23.24	6.65	27.04	35.38	38.23	46.00	7.77	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.32	1.53	0.00	14.85	38.70	40.00	1.30	Peak
46.490	15.84	1.76	26.46	47.77	38.91	40.00	1.09	Peak
101.780	16.95	2.63	26.28	35.69	28.99	43.50	14.51	Peak
169.680	15.93	3.40	25.91	39.23	32.65	43.50	10.85	Peak
378.230	21.18	5.69	26.28	37.45	38.04	46.00	7.96	Peak
485.900	23.24	6.65	27.04	35.64	38.49	46.00	7.51	Peak

A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics

**Band Edge:**


- **Test SKU #1 (with LUXSHARE-ICT Antenna)**

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

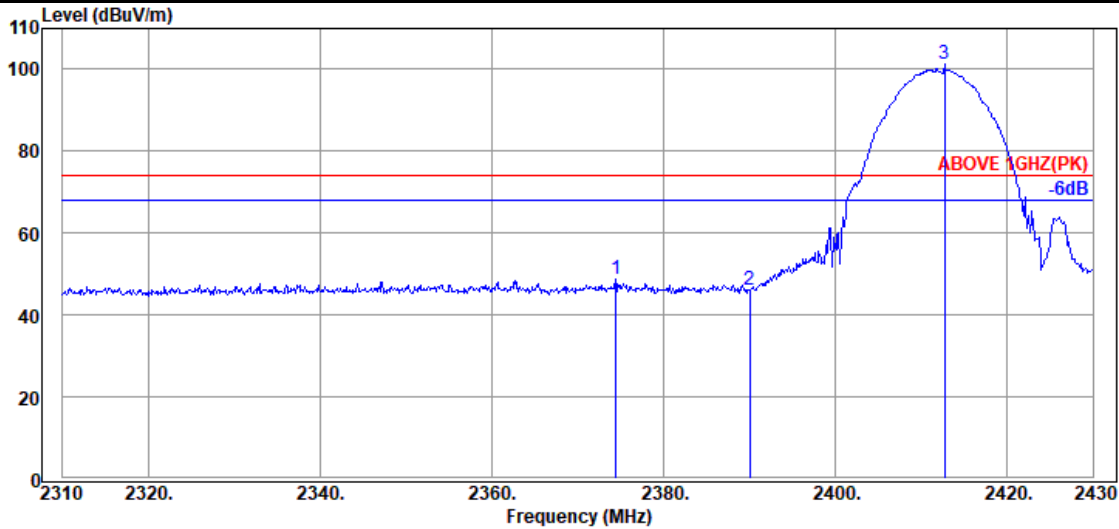

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.440	28.33	5.70	39.93	54.54	48.64	74.00	25.36	Peak
2390.040	28.21	5.72	39.93	51.95	45.95	74.00	28.05	Peak
@ 2412.720	28.19	5.76	39.93	107.19	101.21	---	---	Peak

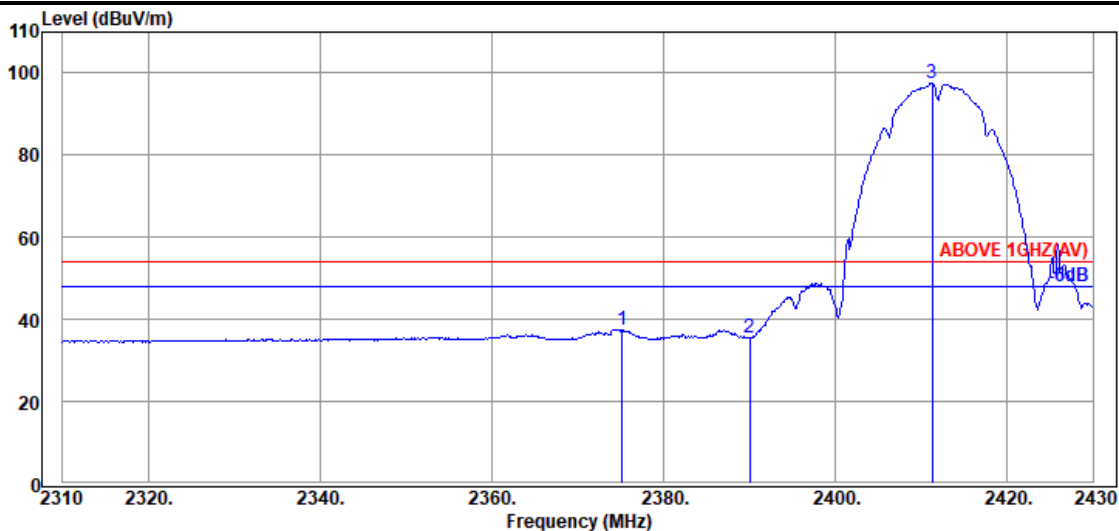


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.160	28.33	5.70	39.93	43.39	37.49	54.00	16.51	Average
2390.040	28.21	5.72	39.93	41.58	35.58	54.00	18.42	Average
@ 2411.280	28.19	5.76	39.93	103.50	97.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

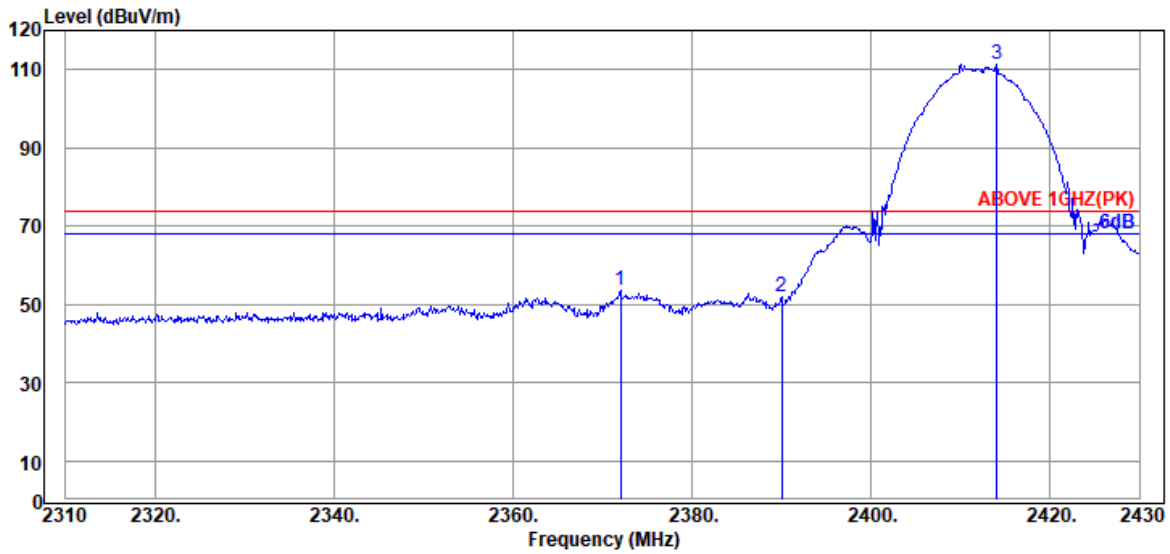

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.040	28.33	5.70	39.93	59.39	53.49	74.00	20.51	Peak
2390.040	28.21	5.72	39.93	57.86	51.86	74.00	22.14	Peak
@ 2414.040	28.19	5.76	39.93	117.30	111.32	---	---	Peak

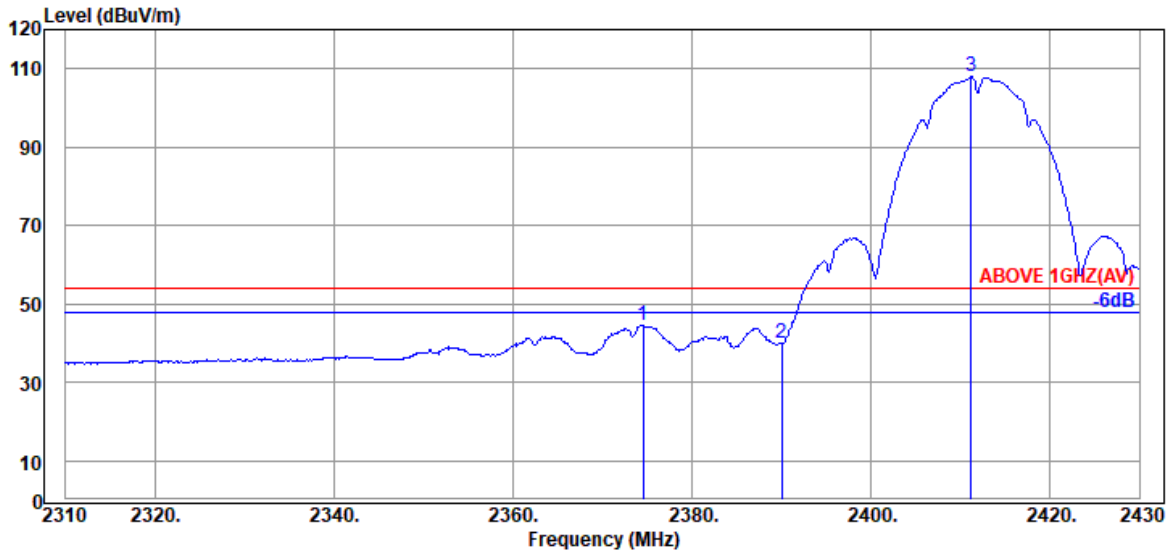


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.560	28.33	5.70	39.93	50.41	44.51	54.00	9.49	Average
2390.040	28.21	5.72	39.93	46.08	40.08	54.00	13.92	Average
@ 2411.160	28.14	5.75	39.93	113.92	107.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

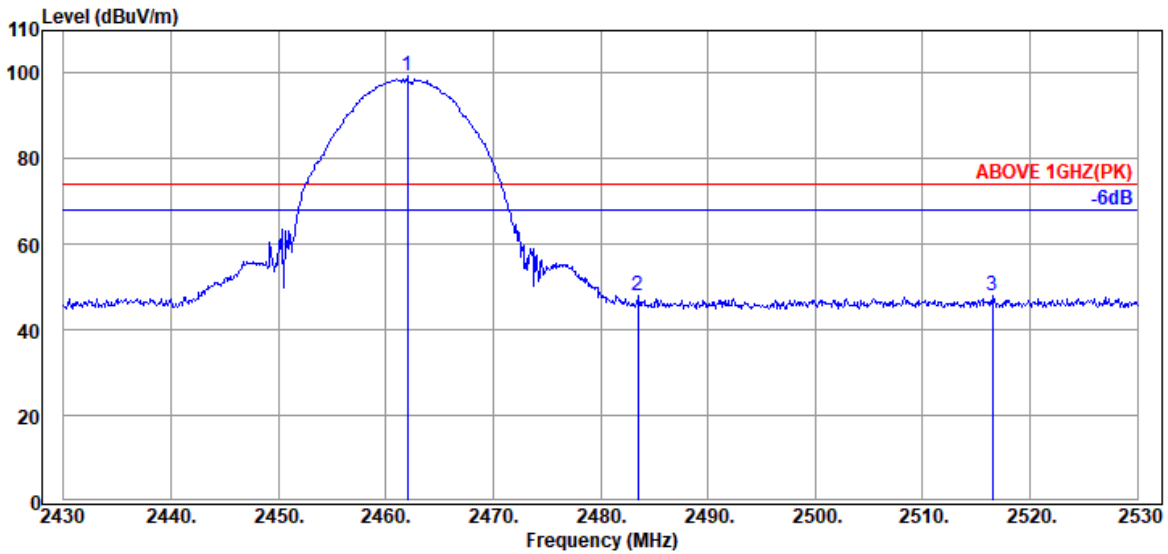

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.43	5.84	39.92	105.01	99.36	---	---	Peak
2483.500	28.47	5.87	39.92	53.63	48.05	74.00	25.95	Peak
2516.500	28.59	5.93	39.93	53.41	48.00	74.00	26.00	Peak

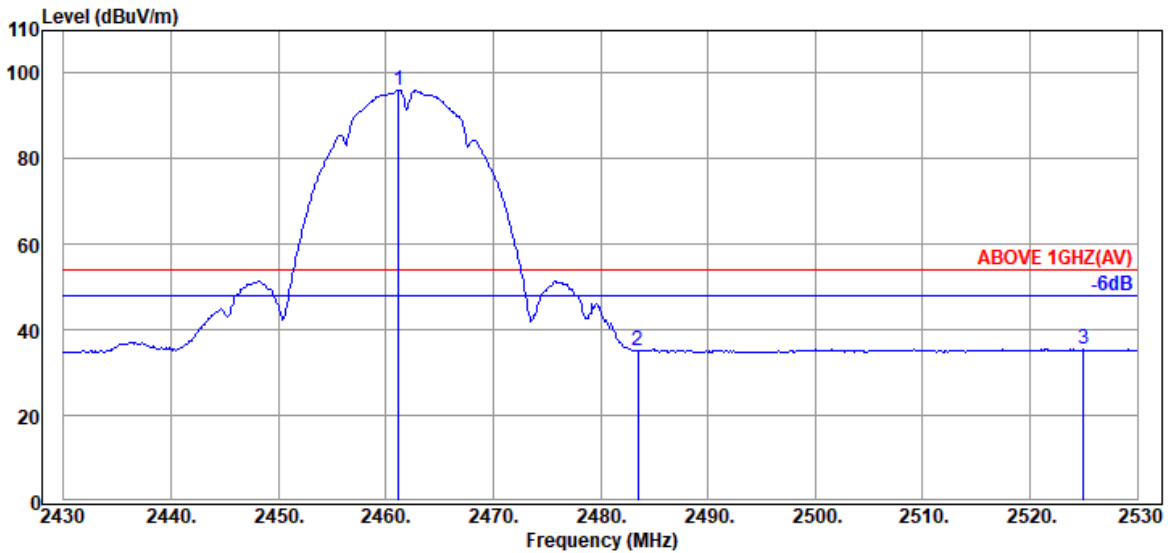


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.43	5.84	39.92	101.71	96.06	---	---	Average
2483.500	28.47	5.87	39.92	40.66	35.08	54.00	18.92	Average
2525.000	28.63	5.94	39.93	40.90	35.54	54.00	18.46	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

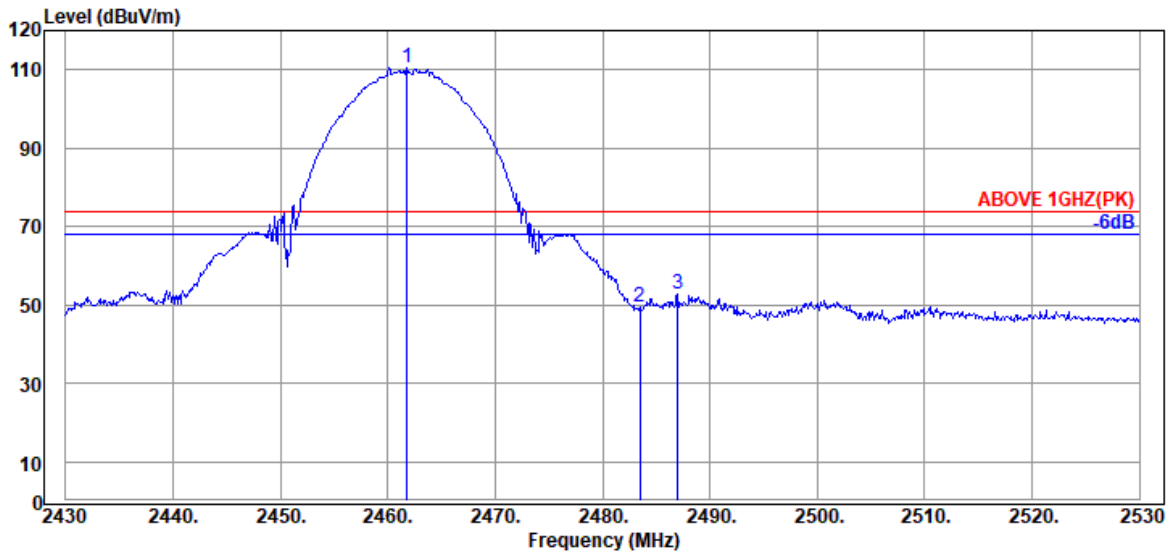

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.800	28.43	5.84	39.92	116.23	110.58	---	---	Peak
2483.500	28.47	5.87	39.92	54.95	49.37	74.00	24.63	Peak
2487.000	28.47	5.87	39.92	58.23	52.65	74.00	21.35	Peak

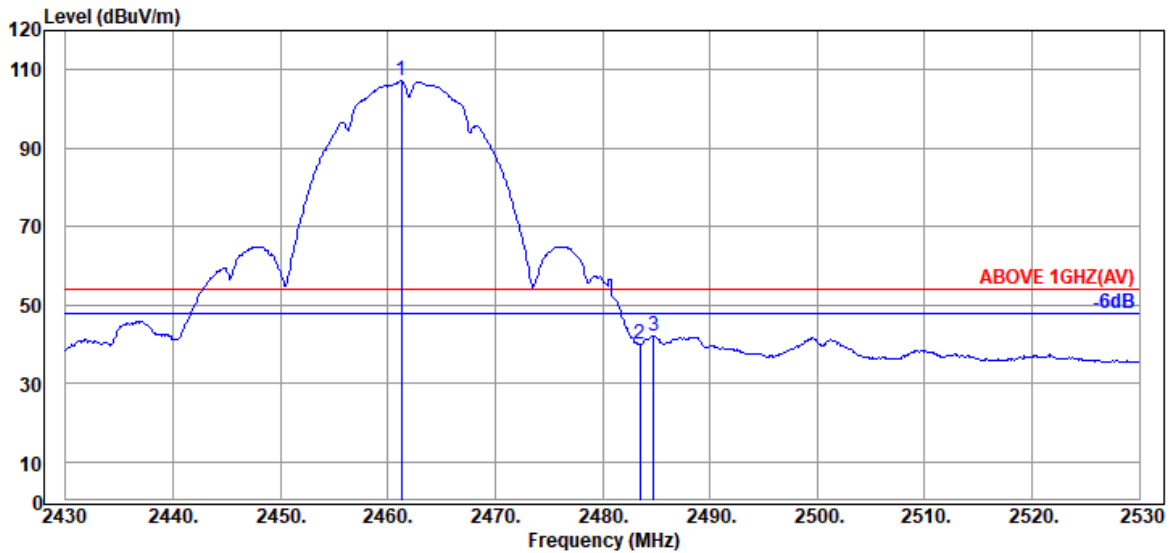


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.43	5.84	39.92	112.77	107.12	---	---	Average
2483.500	28.47	5.87	39.92	45.53	39.95	54.00	14.05	Average
2484.800	28.47	5.87	39.92	47.68	42.10	54.00	11.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

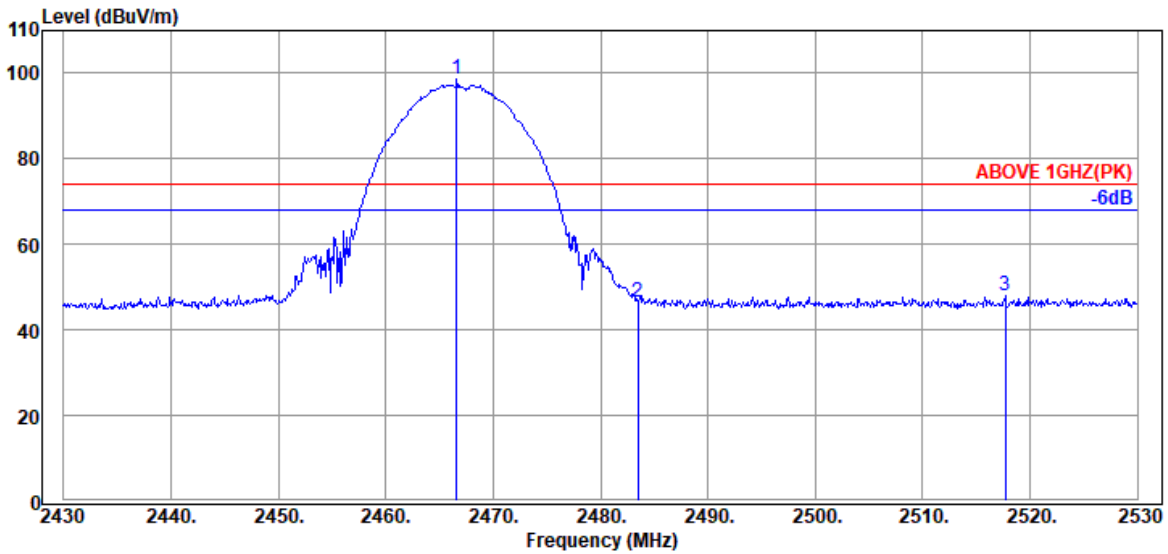

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.600	28.43	5.84	39.92	104.21	98.56	---	---	Peak
2483.500	28.47	5.87	39.92	51.96	46.38	74.00	27.62	Peak
2517.700	28.59	5.93	39.93	53.26	47.85	74.00	26.15	Peak

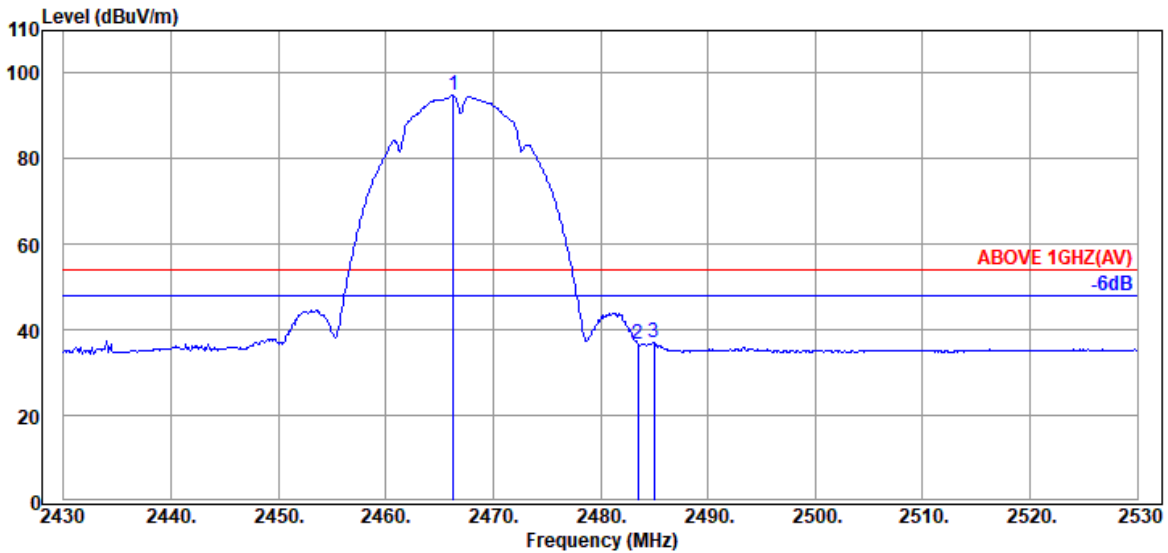


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	5.84	39.92	100.49	94.84	---	---	Average
2483.500	28.47	5.87	39.92	42.38	36.80	54.00	17.20	Average
2485.000	28.47	5.87	39.92	42.70	37.12	54.00	16.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

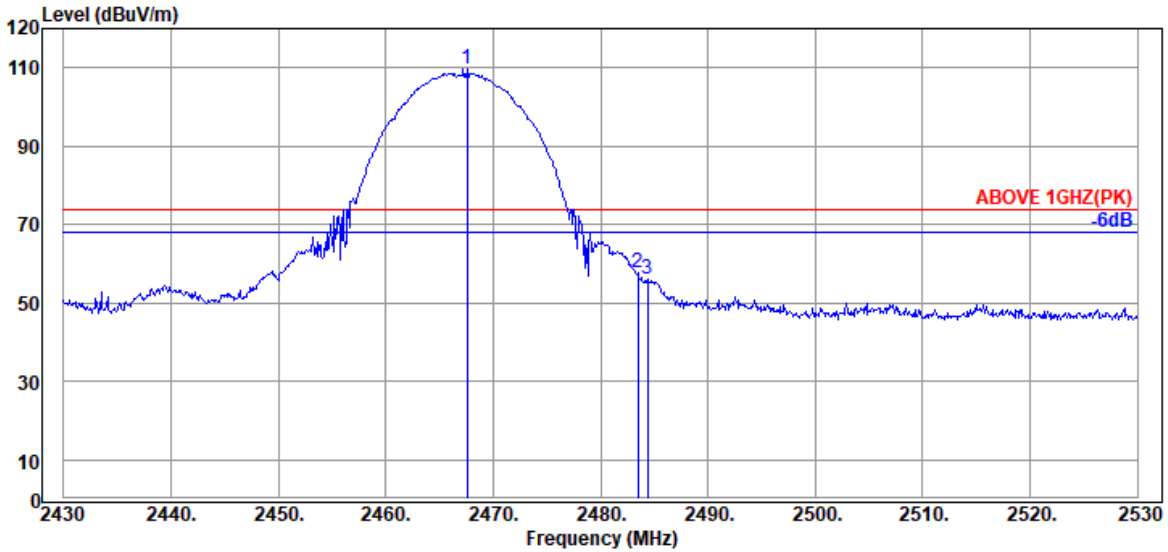

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.600	28.44	5.85	39.92	115.44	109.81	---	---	Peak
2483.500	28.47	5.87	39.92	63.51	57.93	74.00	16.07	Peak
2484.400	28.47	5.87	39.92	61.62	56.04	74.00	17.96	Peak

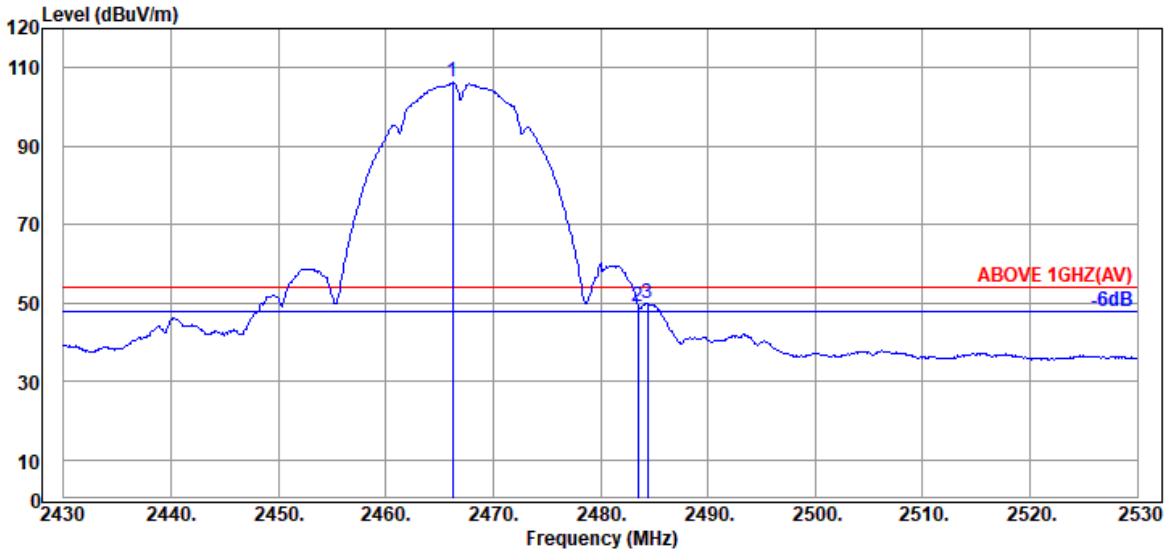


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.200	28.43	5.84	39.92	111.84	106.19	---	---	Average
2483.500	28.47	5.87	39.92	54.71	49.13	54.00	4.87	Average
2484.400	28.47	5.87	39.92	55.35	49.77	54.00	4.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

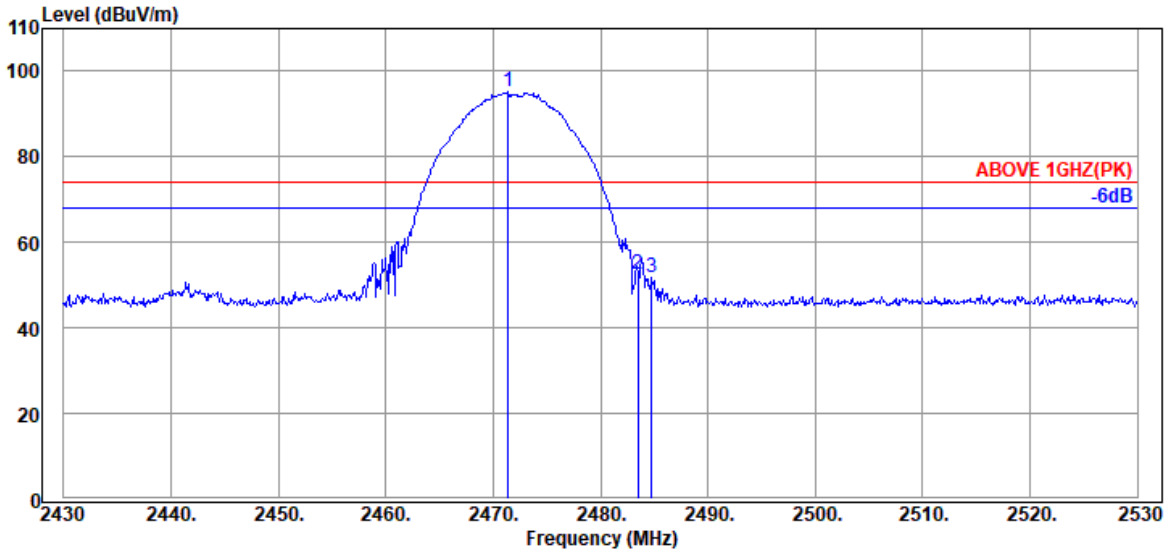

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.400	28.44	5.85	39.92	100.73	95.10	---	---	Peak
2483.500	28.47	5.87	39.92	58.19	52.61	74.00	21.39	Peak
2484.800	28.47	5.87	39.92	57.31	51.73	74.00	22.27	Peak

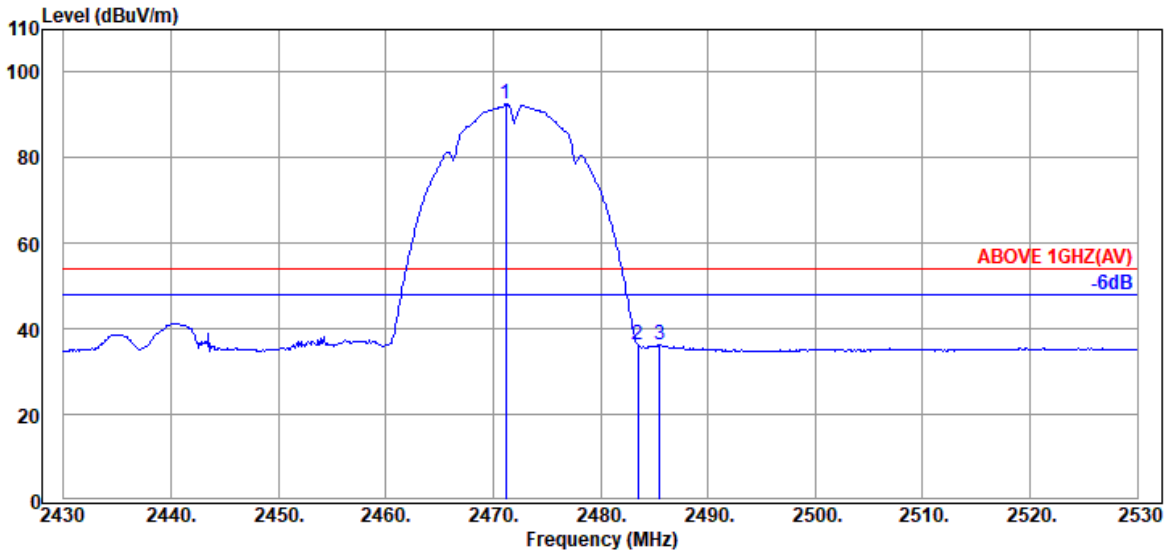


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	5.85	39.92	98.12	92.49	---	---	Average
2483.500	28.47	5.87	39.92	41.93	36.35	54.00	17.65	Average
2485.500	28.47	5.87	39.92	41.97	36.39	54.00	17.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

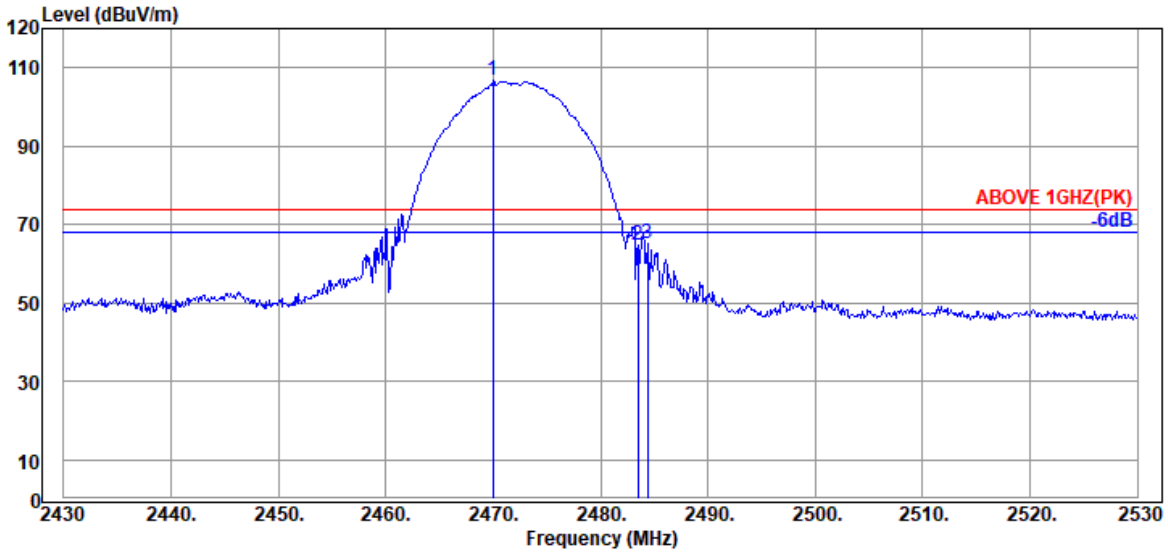

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	28.44	5.85	39.92	112.53	106.90	---	---	Peak
2483.500	28.47	5.87	39.92	70.43	64.85	74.00	9.15	Peak
2484.400	28.47	5.87	39.92	70.65	65.07	74.00	8.93	Peak

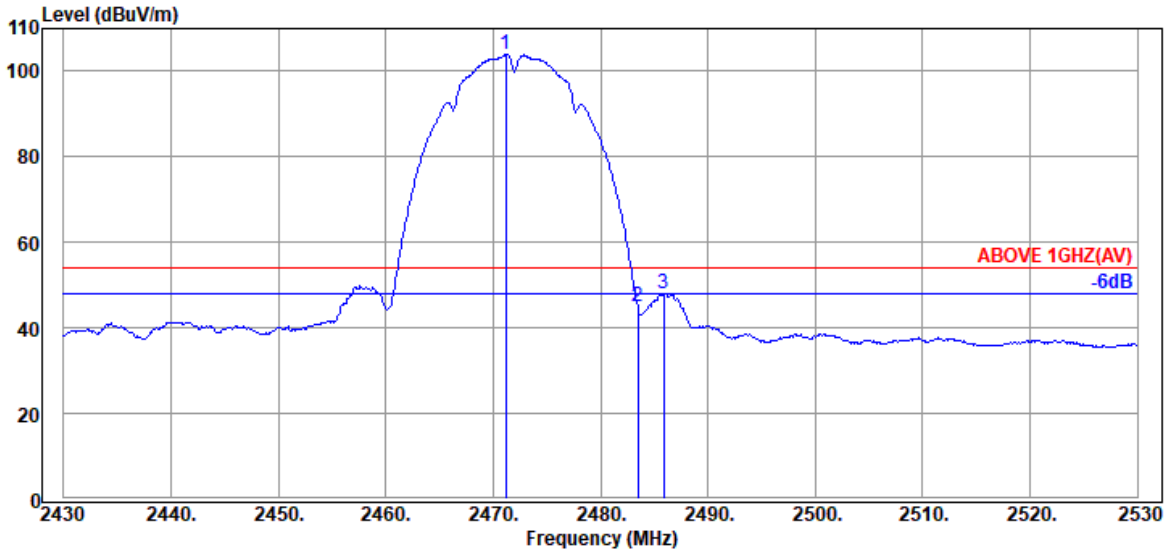


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	5.85	39.92	109.59	103.96	---	---	Average
2483.500	28.47	5.87	39.92	50.48	44.90	54.00	9.10	Average
2485.900	28.47	5.87	39.92	53.59	48.01	54.00	5.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

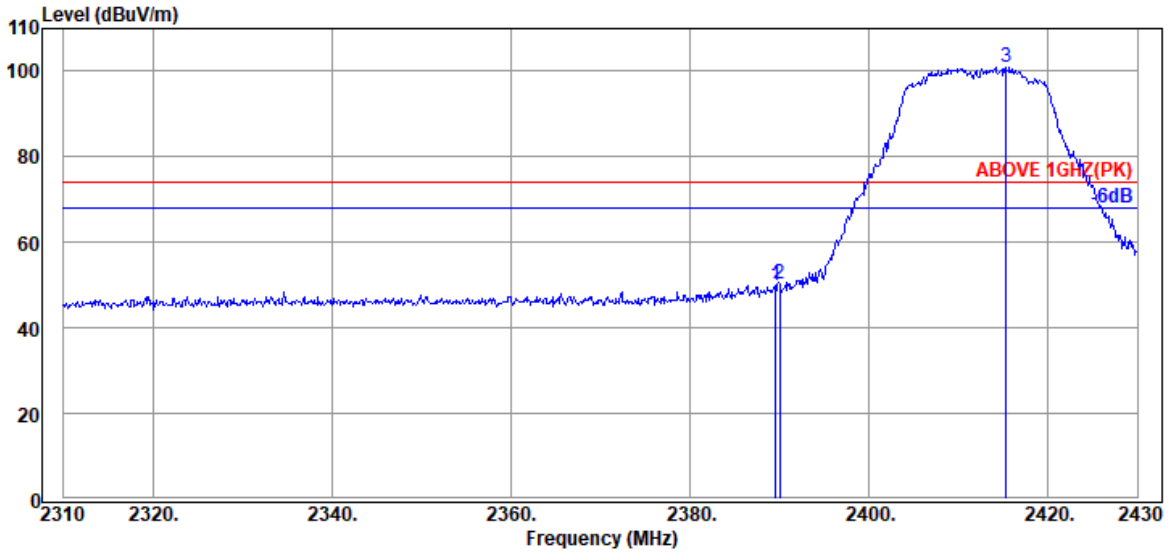

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	55.93	49.93	74.00	24.07	Peak
2390.040	28.21	5.72	39.93	56.19	50.19	74.00	23.81	Peak
@ 2415.360	28.19	5.76	39.93	107.00	101.02	---	---	Peak

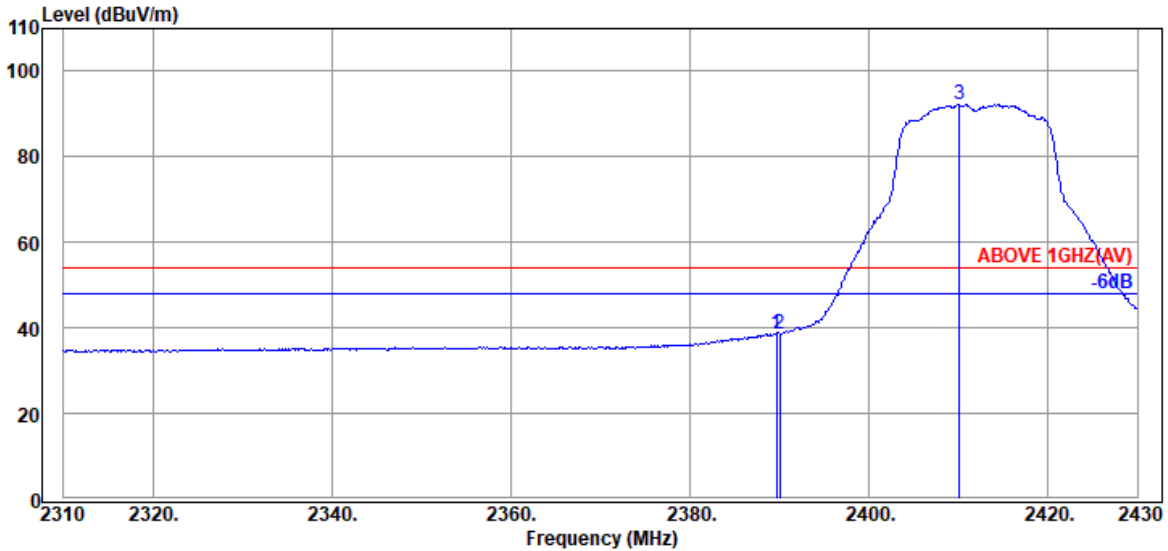


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	44.73	38.73	54.00	15.27	Average
2390.040	28.21	5.72	39.93	44.71	38.71	54.00	15.29	Average
@ 2410.080	28.14	5.75	39.93	98.31	92.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

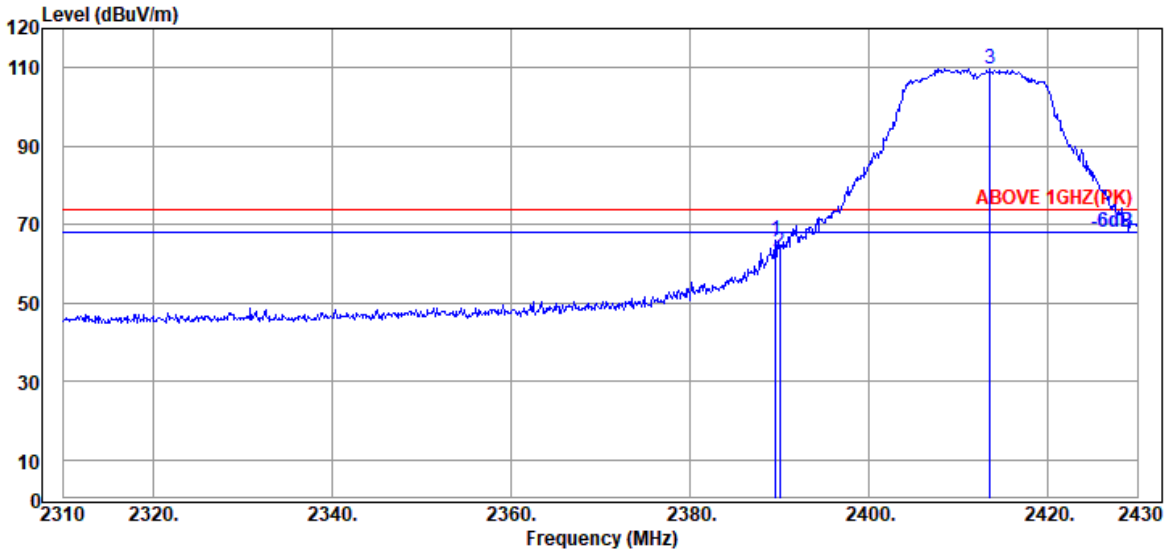

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	71.87	65.87	74.00	8.13	Peak
2390.040	28.21	5.72	39.93	69.25	63.25	74.00	10.75	Peak
@ 2413.560	28.19	5.76	39.93	115.64	109.66	---	---	Peak

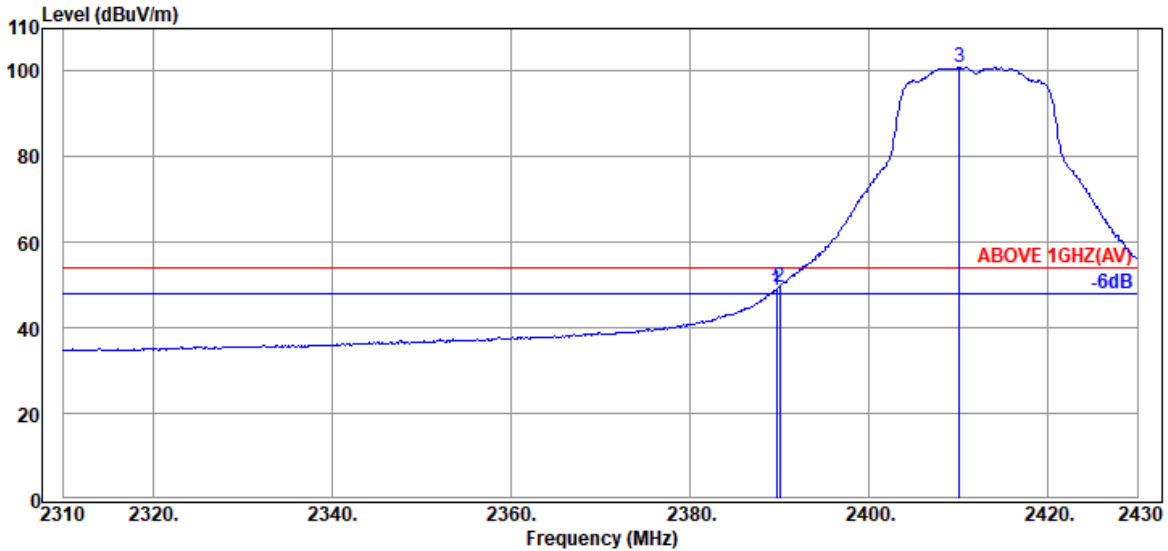


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	54.89	48.89	54.00	5.11	Average
2390.040	28.21	5.72	39.93	55.62	49.62	54.00	4.38	Average
@ 2410.080	28.14	5.75	39.93	107.04	101.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

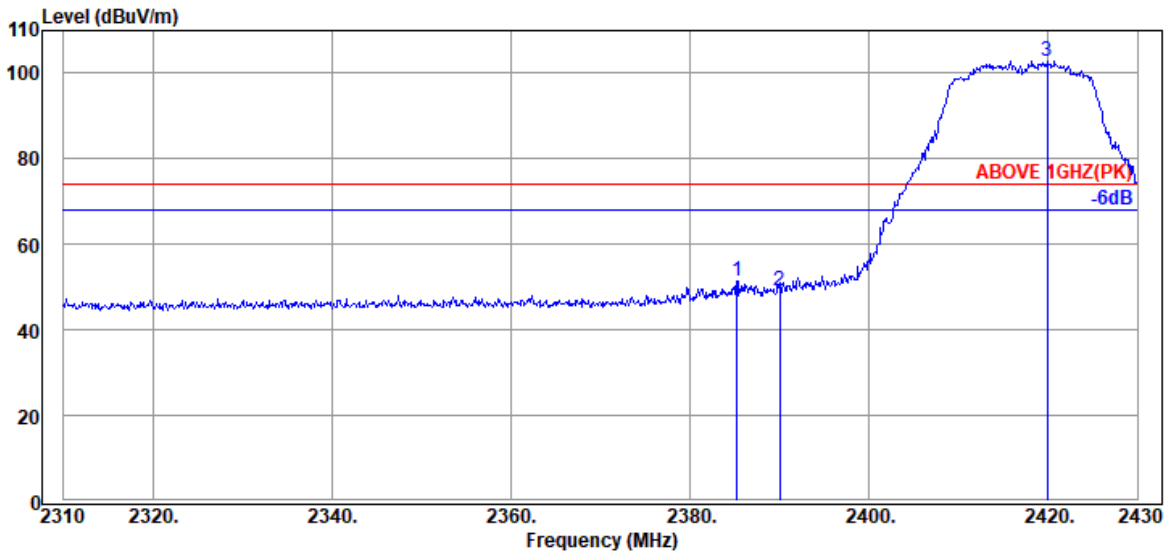

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.240	28.21	5.72	39.93	57.31	51.31	74.00	22.69	Peak
2390.040	28.21	5.72	39.93	55.30	49.30	74.00	24.70	Peak
@ 2419.920	28.23	5.77	39.93	108.83	102.90	---	---	Peak

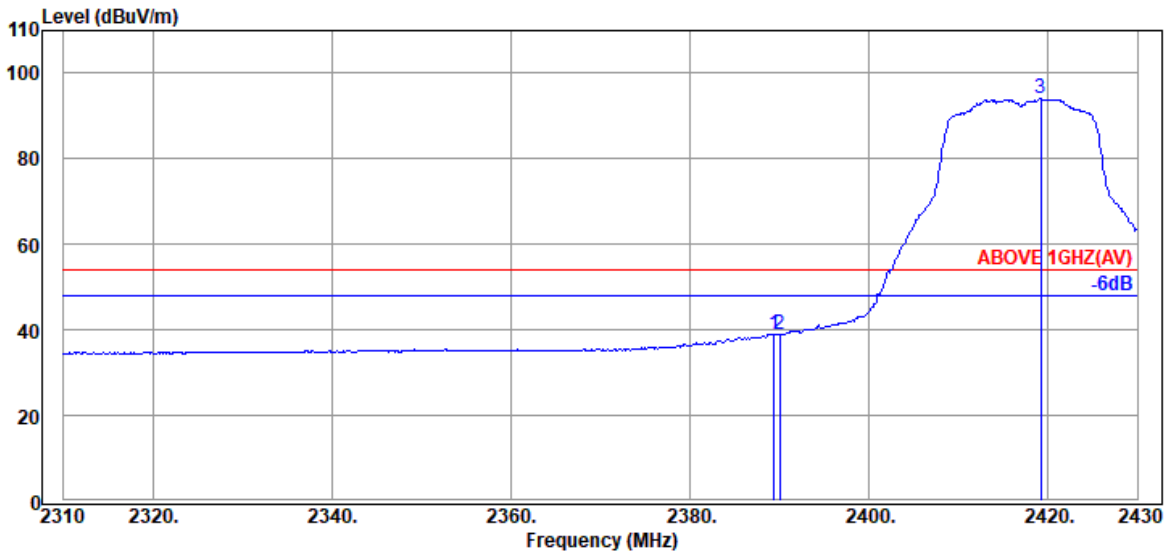


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.21	5.72	39.93	44.91	38.91	54.00	15.09	Average
2390.040	28.21	5.72	39.93	44.94	38.94	54.00	15.06	Average
@ 2419.200	28.23	5.77	39.93	99.93	94.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

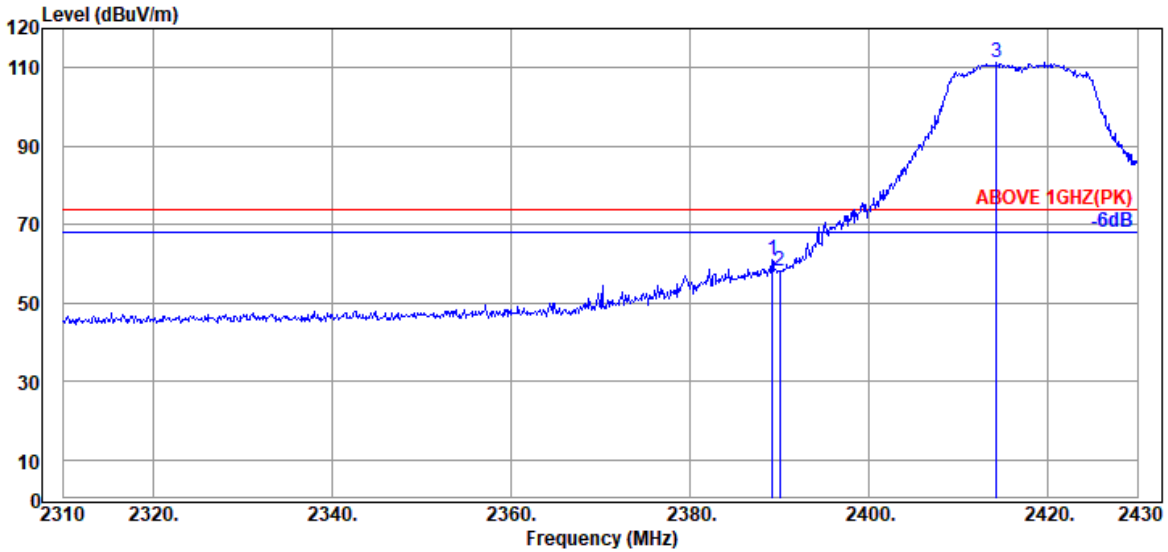

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.21	5.72	39.93	66.98	60.98	74.00	13.02	Peak
2390.040	28.21	5.72	39.93	64.26	58.26	74.00	15.74	Peak
@ 2414.280	28.19	5.76	39.93	117.29	111.31	---	---	Peak


Antenna at Vertical Polarization

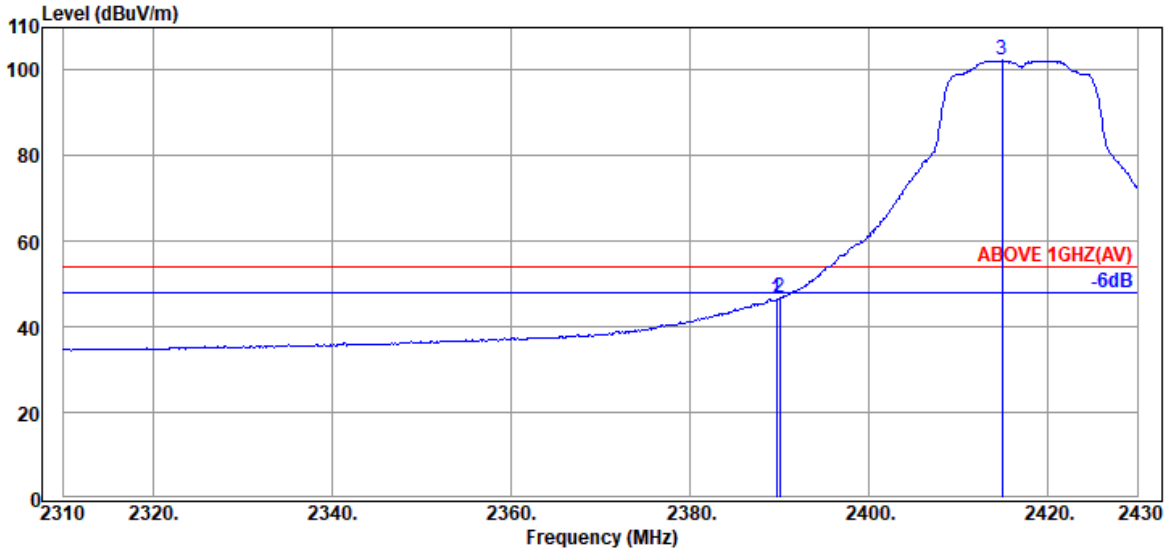

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	52.38	46.38	54.00	7.62	Average
2390.040	28.21	5.72	39.93	52.85	46.85	54.00	7.15	Average
@ 2414.880	28.19	5.76	39.93	108.27	102.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

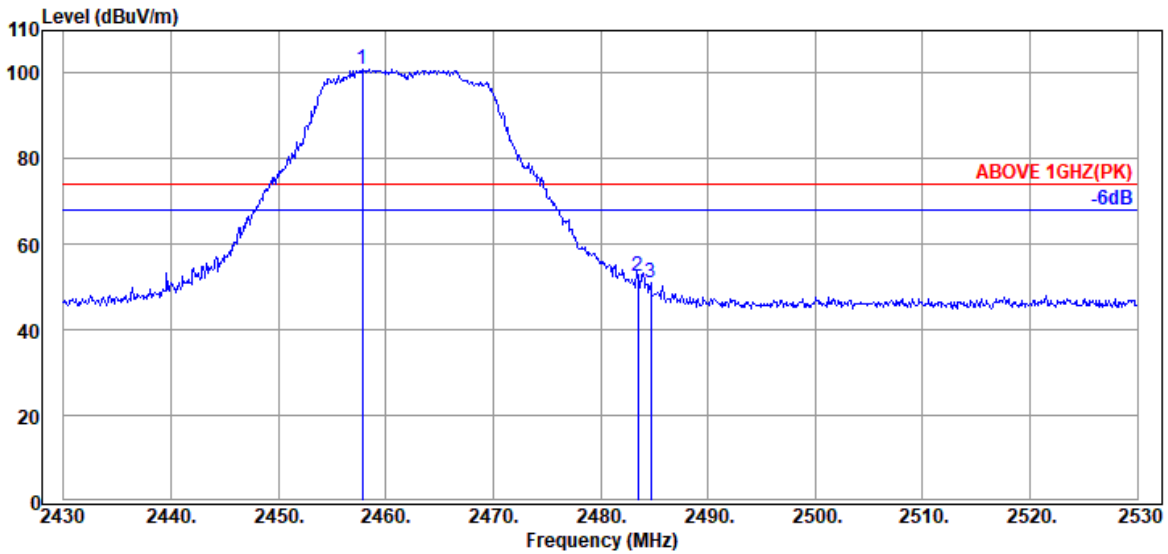

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.800	28.41	5.83	39.92	106.70	101.02	---	---	Peak
2483.500	28.47	5.87	39.92	58.20	52.62	74.00	21.38	Peak
2484.700	28.47	5.87	39.92	56.56	50.98	74.00	23.02	Peak

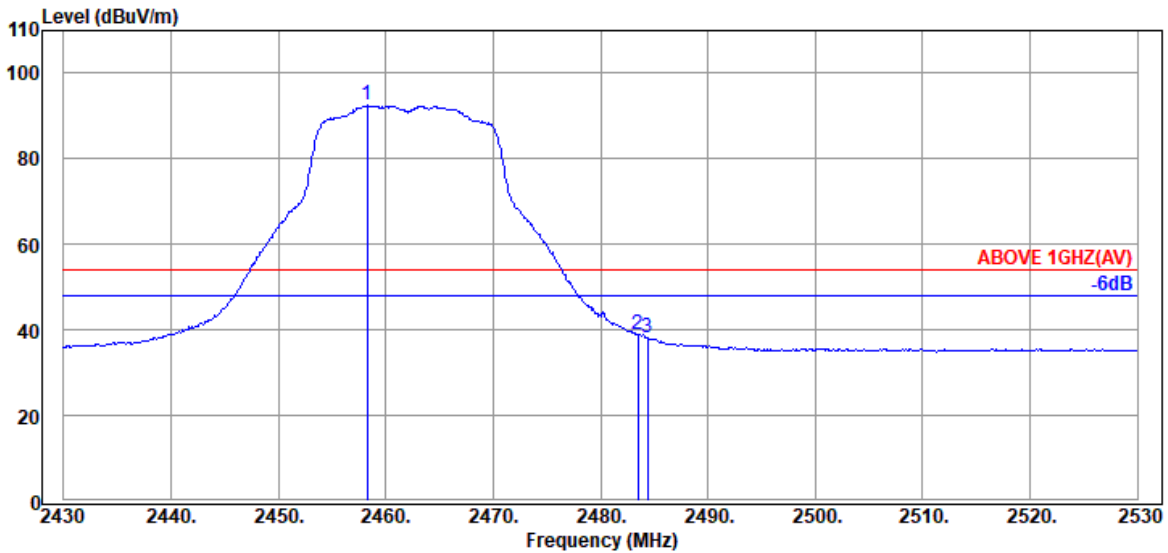


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	28.41	5.83	39.92	98.20	92.52	---	---	Average
2483.500	28.47	5.87	39.92	44.56	38.98	54.00	15.02	Average
2484.400	28.47	5.87	39.92	43.62	38.04	54.00	15.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

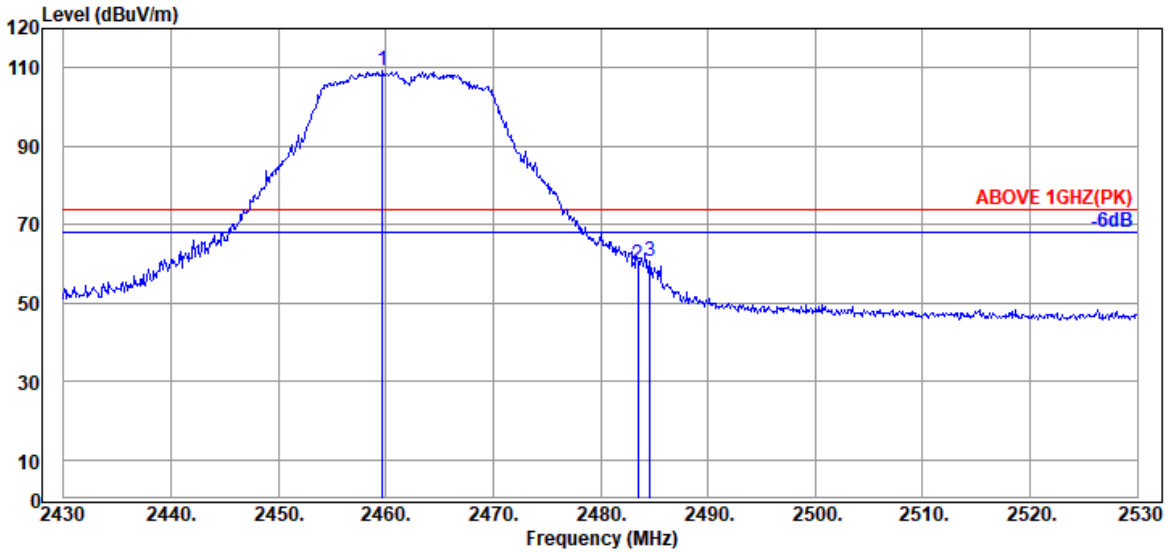

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	28.41	5.83	39.92	114.76	109.08	---	---	Peak
2483.500	28.47	5.87	39.92	65.28	59.70	74.00	14.30	Peak
2484.600	28.47	5.87	39.92	66.27	60.69	74.00	13.31	Peak

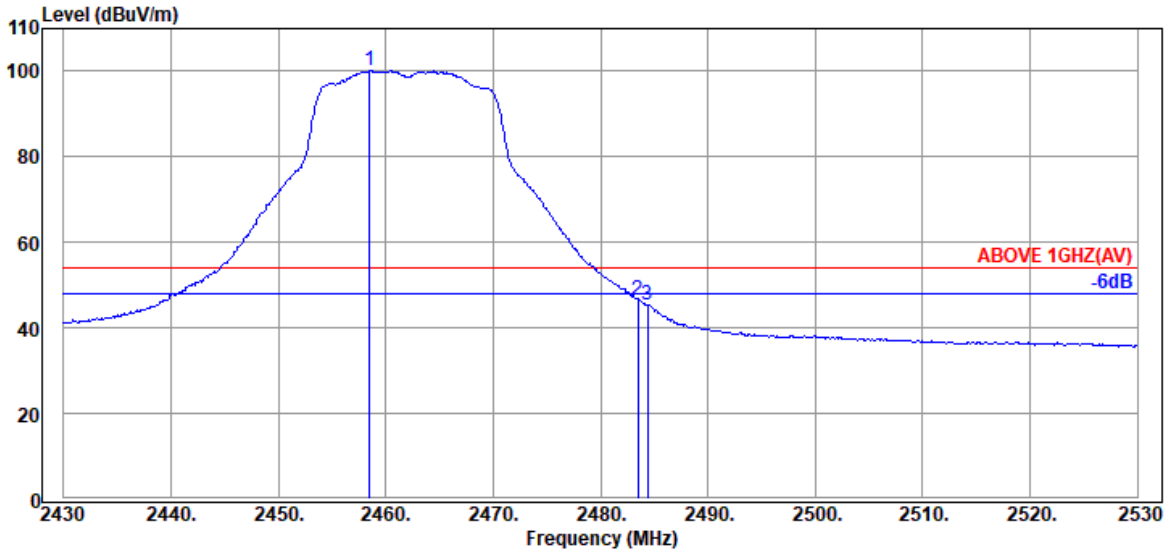


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	28.41	5.83	39.92	105.86	100.18	---	---	Average
2483.500	28.47	5.87	39.92	52.23	46.65	54.00	7.35	Average
2484.400	28.47	5.87	39.92	50.97	45.39	54.00	8.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

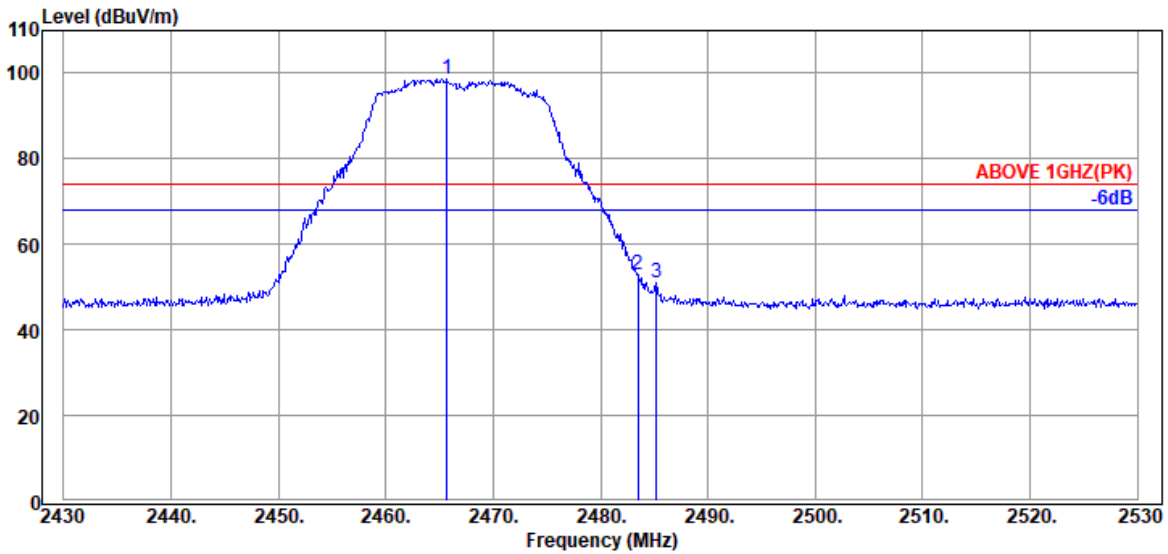

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.43	5.84	39.92	104.42	98.77	---	---	Peak
2483.500	28.47	5.87	39.92	58.42	52.84	74.00	21.16	Peak
2485.200	28.47	5.87	39.92	56.69	51.11	74.00	22.89	Peak

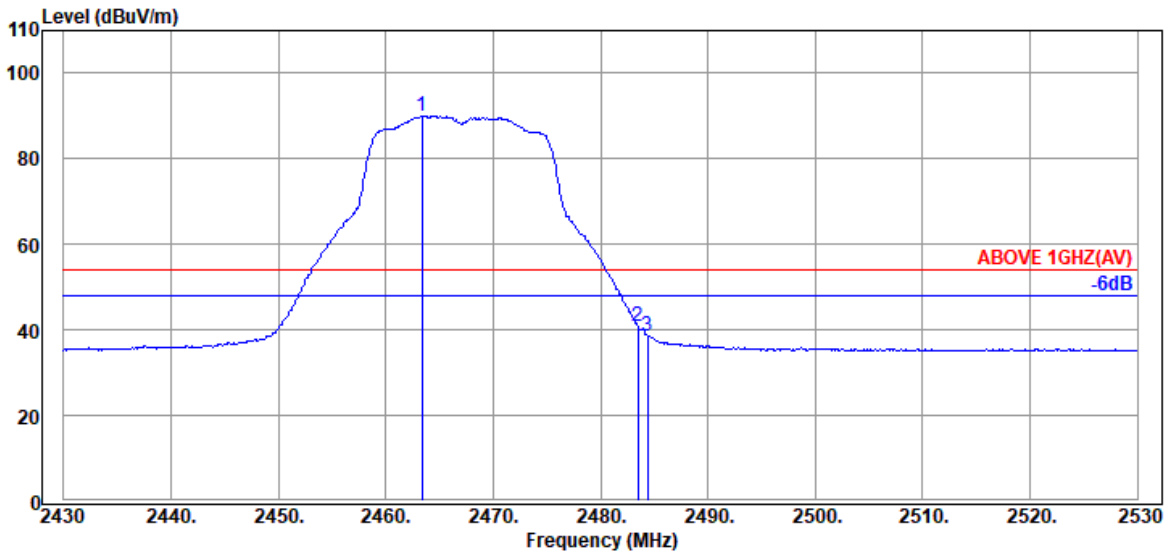


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.43	5.84	39.92	95.68	90.03	---	---	Average
2483.500	28.47	5.87	39.92	46.43	40.85	54.00	13.15	Average
2484.400	28.47	5.87	39.92	44.30	38.72	54.00	15.28	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

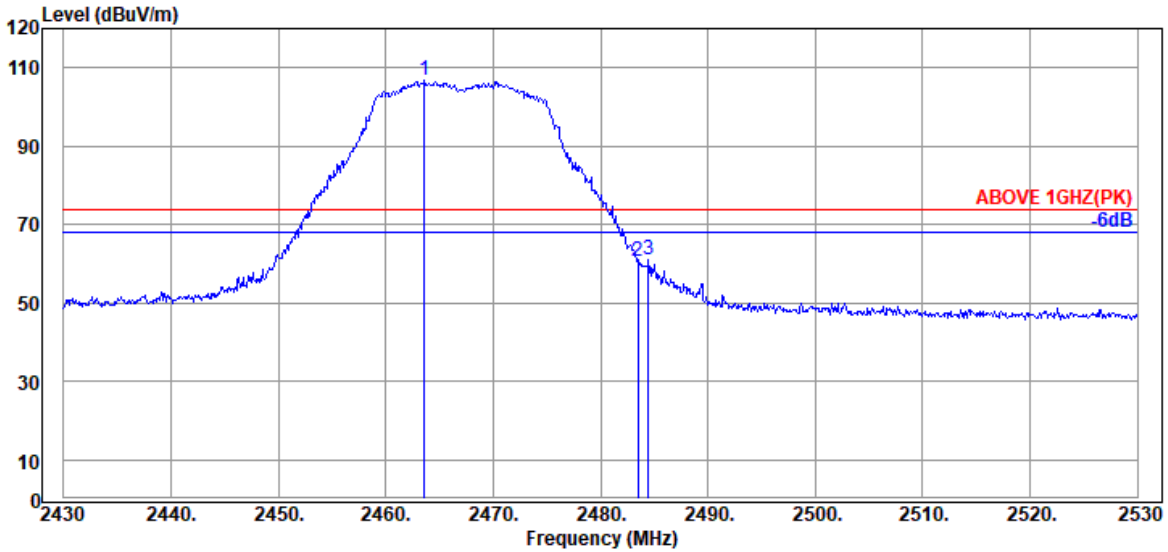

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.600	28.43	5.84	39.92	112.55	106.90	---	---	Peak
2483.500	28.47	5.87	39.92	66.33	60.75	74.00	13.25	Peak
2484.500	28.47	5.87	39.92	66.59	61.01	74.00	12.99	Peak

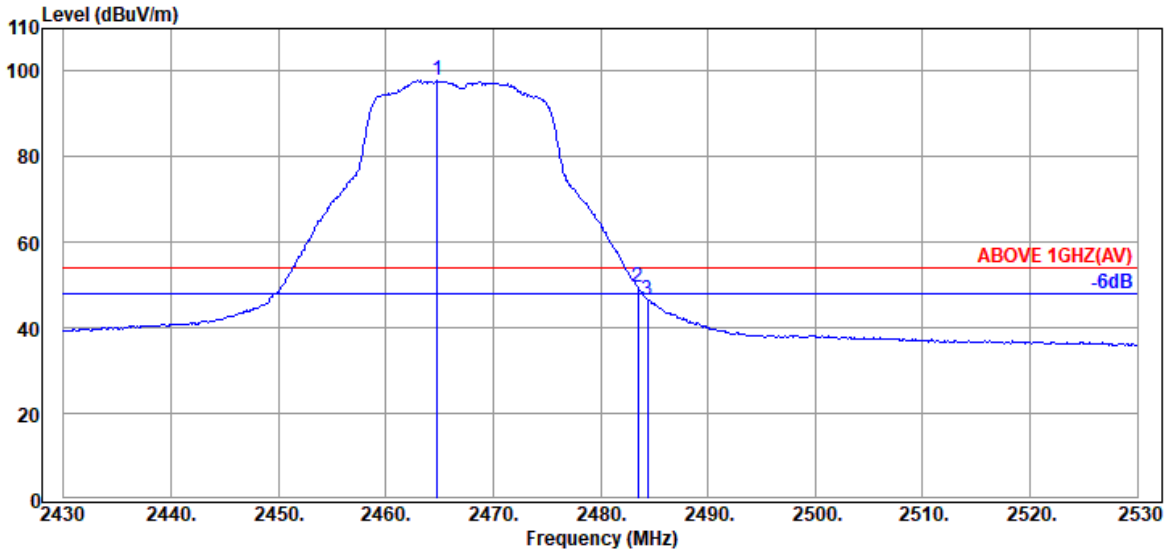


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.43	5.84	39.92	103.45	97.80	---	---	Average
2483.500	28.47	5.87	39.92	55.05	49.47	54.00	4.53	Average
2484.400	28.47	5.87	39.92	52.06	46.48	54.00	7.52	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

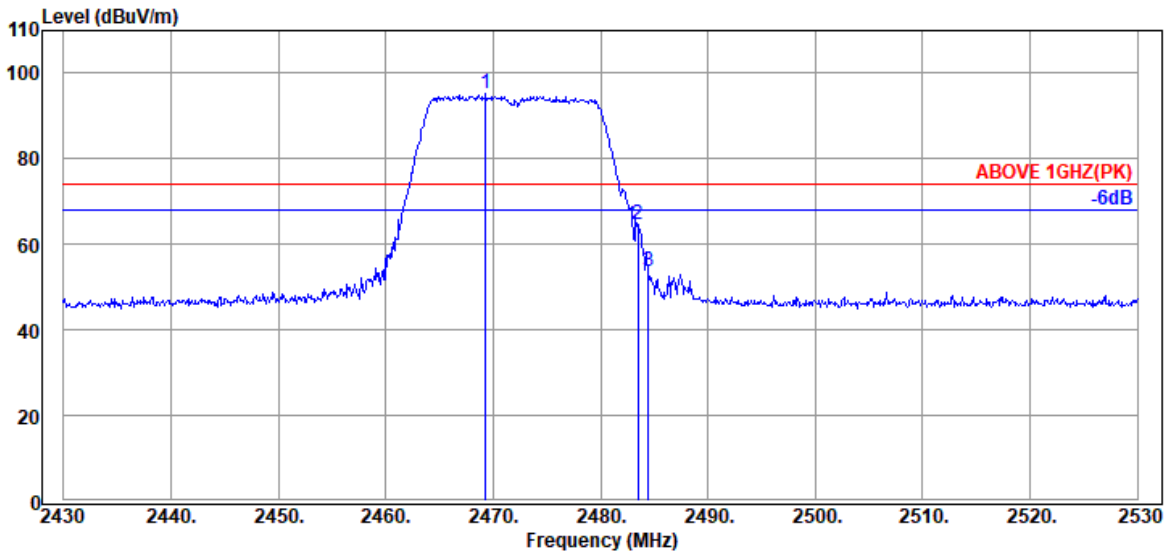

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.44	5.85	39.92	100.82	95.19	---	---	Peak
2483.500	28.47	5.87	39.92	70.35	64.77	74.00	9.23	Peak
2484.500	28.47	5.87	39.92	59.16	53.58	74.00	20.42	Peak

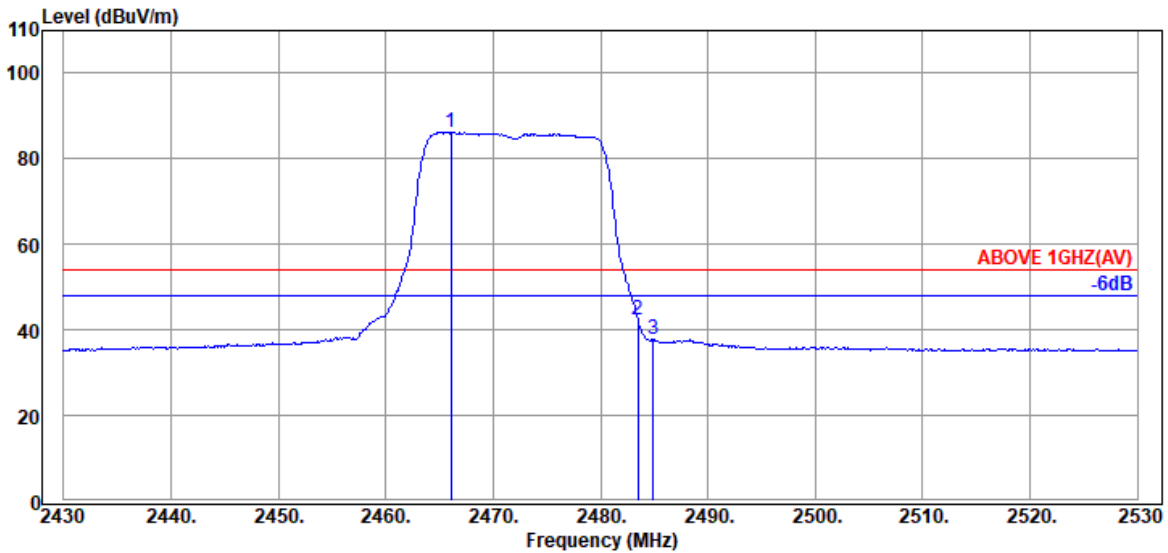


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	28.43	5.84	39.92	91.93	86.28	---	---	Average
2483.500	28.47	5.87	39.92	47.76	42.18	54.00	11.82	Average
2484.900	28.47	5.87	39.92	43.46	37.88	54.00	16.12	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

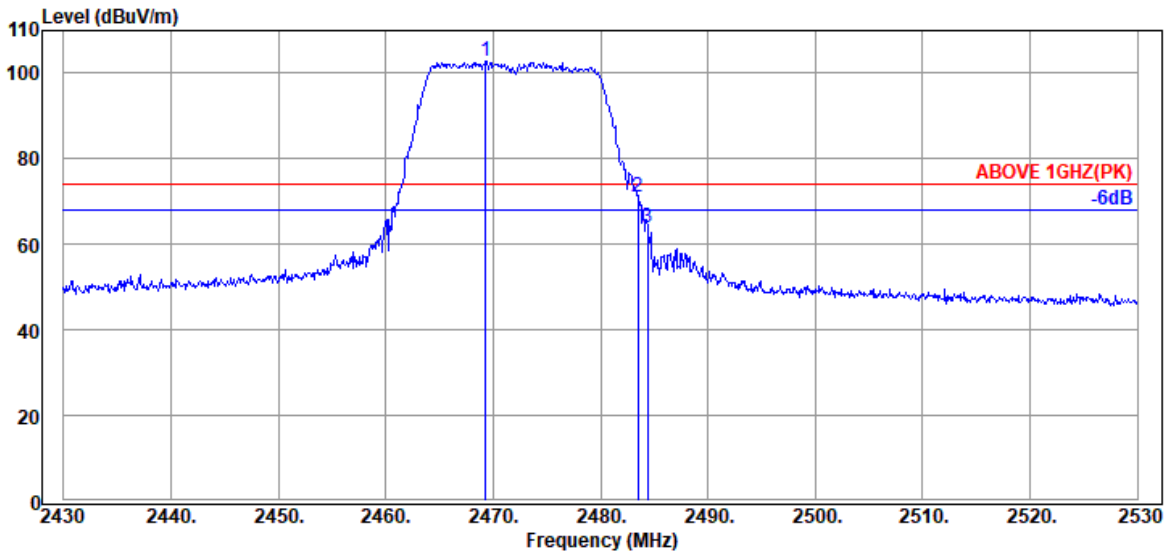

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.44	5.85	39.92	108.58	102.95	---	---	Peak
2483.500	28.47	5.87	39.92	76.60	71.02	74.00	2.98	Peak
2484.400	28.47	5.87	39.92	69.38	63.80	74.00	10.20	Peak

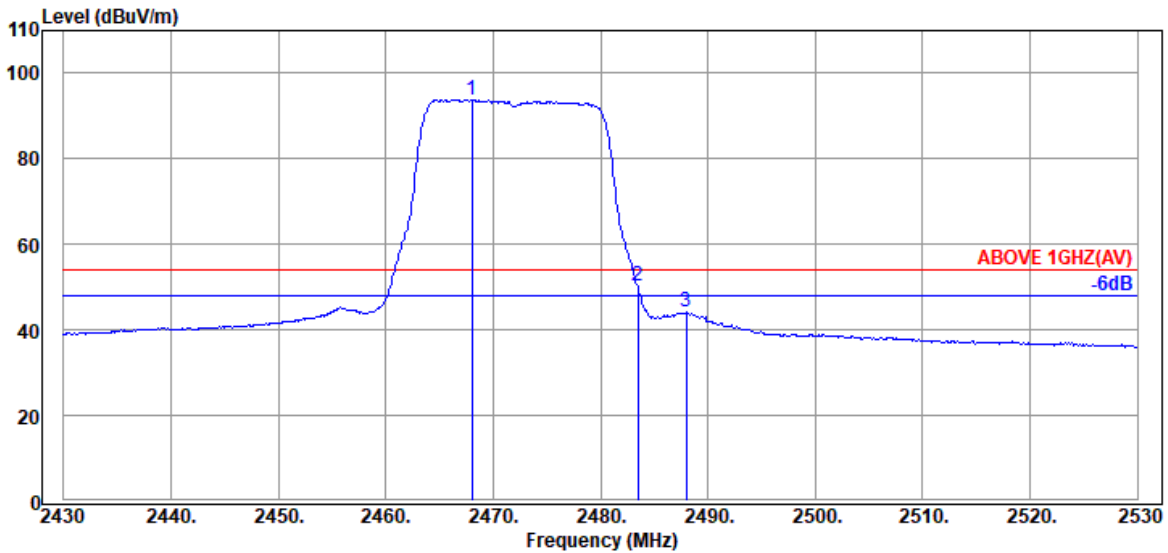


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	28.44	5.85	39.92	99.38	93.75	---	---	Average
2483.500	28.47	5.87	39.92	55.79	50.21	54.00	3.79	Average
2488.000	28.47	5.87	39.92	49.70	44.12	54.00	9.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

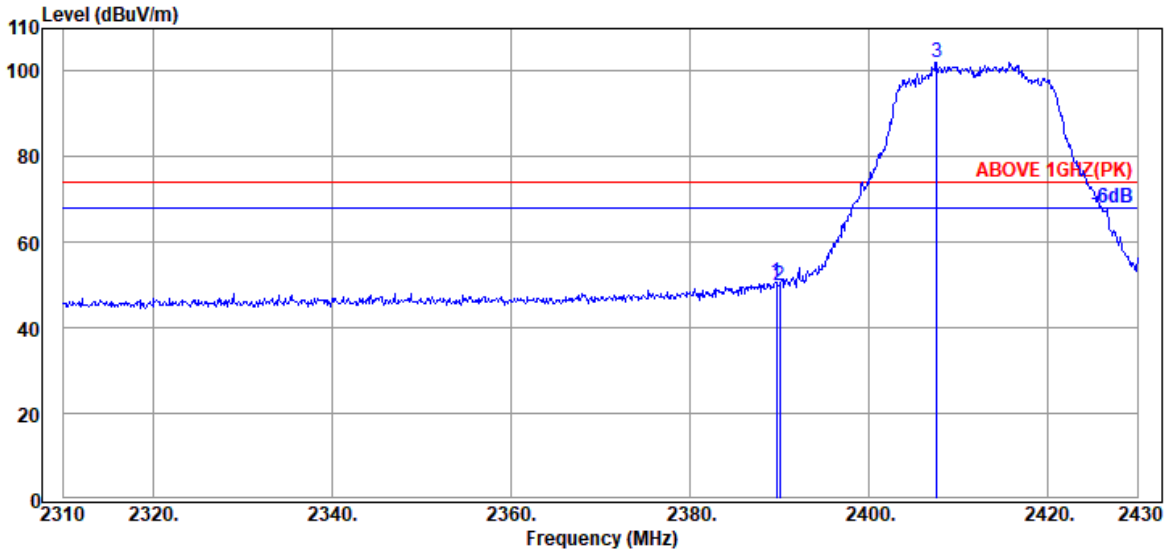

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	56.69	50.69	74.00	23.31	Peak
2390.040	28.21	5.72	39.93	55.74	49.74	74.00	24.26	Peak
@ 2407.560	28.14	5.75	39.93	108.22	102.18	---	---	Peak

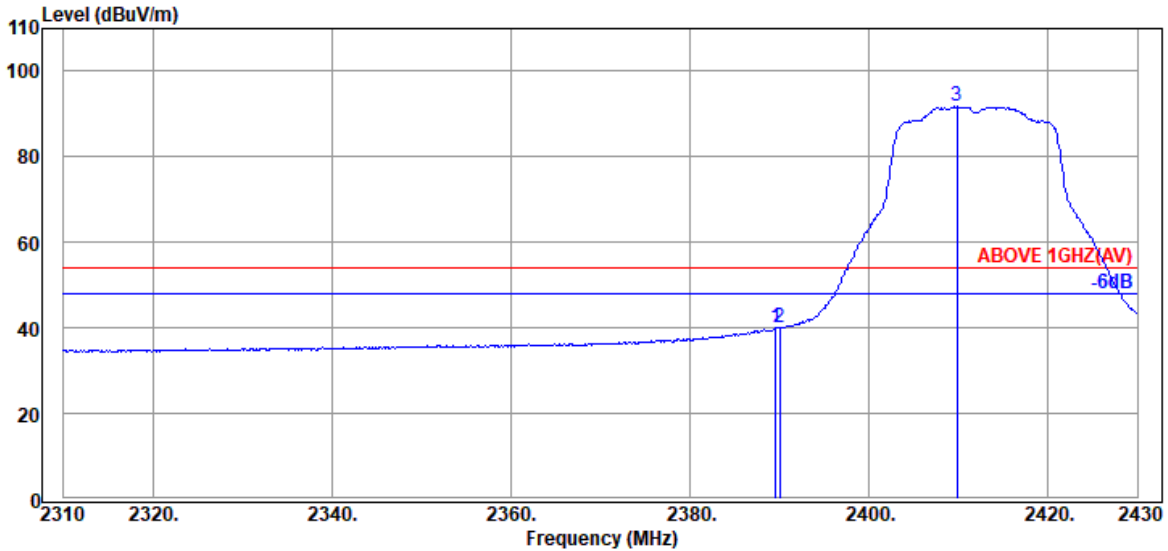


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	46.08	40.08	54.00	13.92	Average
2390.040	28.21	5.72	39.93	45.88	39.88	54.00	14.12	Average
@ 2409.840	28.14	5.75	39.93	97.76	91.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

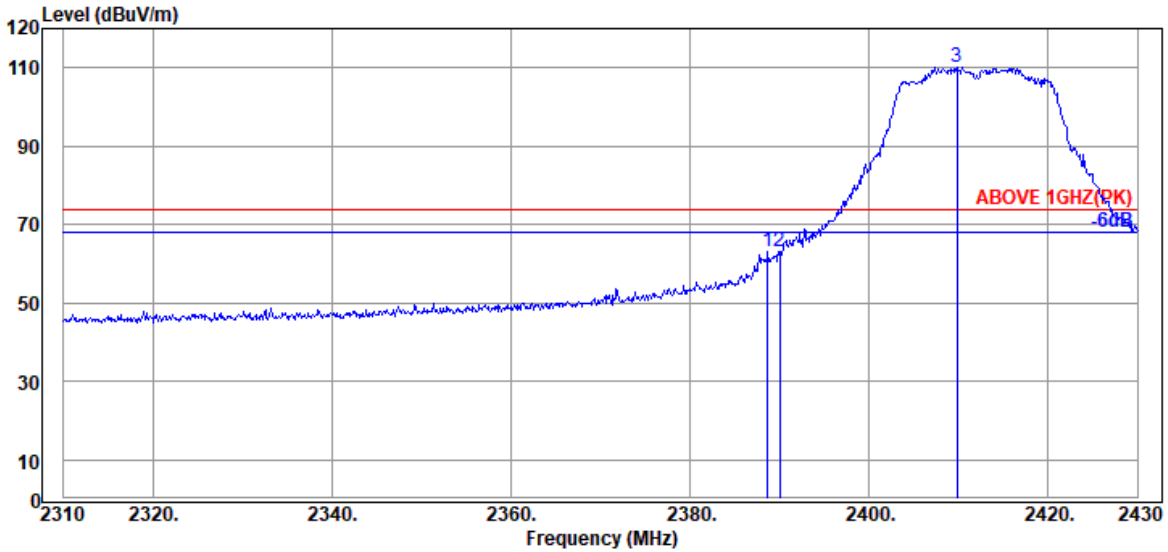

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.21	5.72	39.93	68.89	62.89	74.00	11.11	Peak
2390.040	28.21	5.72	39.93	69.11	63.11	74.00	10.89	Peak
@ 2409.840	28.14	5.75	39.93	116.21	110.17	---	---	Peak

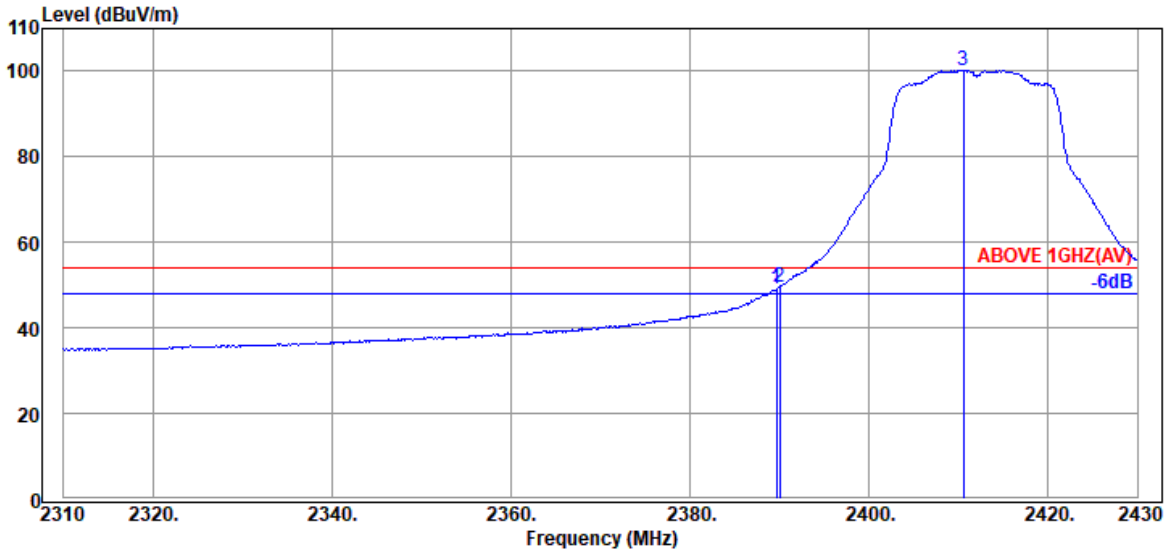


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	55.27	49.27	54.00	4.73	Average
2390.040	28.21	5.72	39.93	55.64	49.64	54.00	4.36	Average
@ 2410.560	28.14	5.75	39.93	106.30	100.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

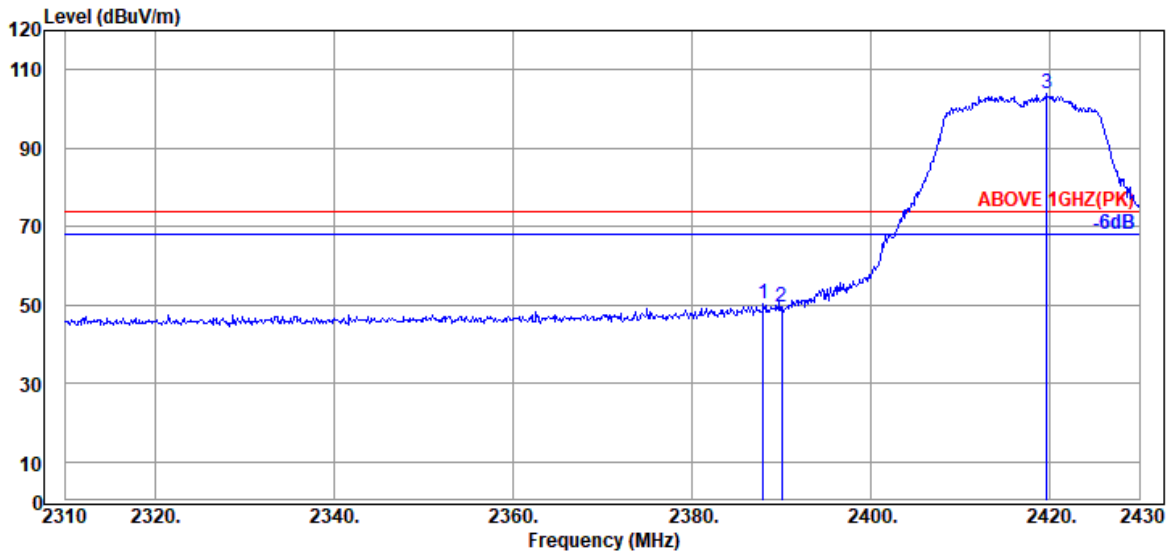

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.21	5.72	39.93	56.51	50.51	74.00	23.49	Peak
2390.040	28.21	5.72	39.93	55.42	49.42	74.00	24.58	Peak
@ 2419.680	28.23	5.77	39.93	109.78	103.85	---	---	Peak

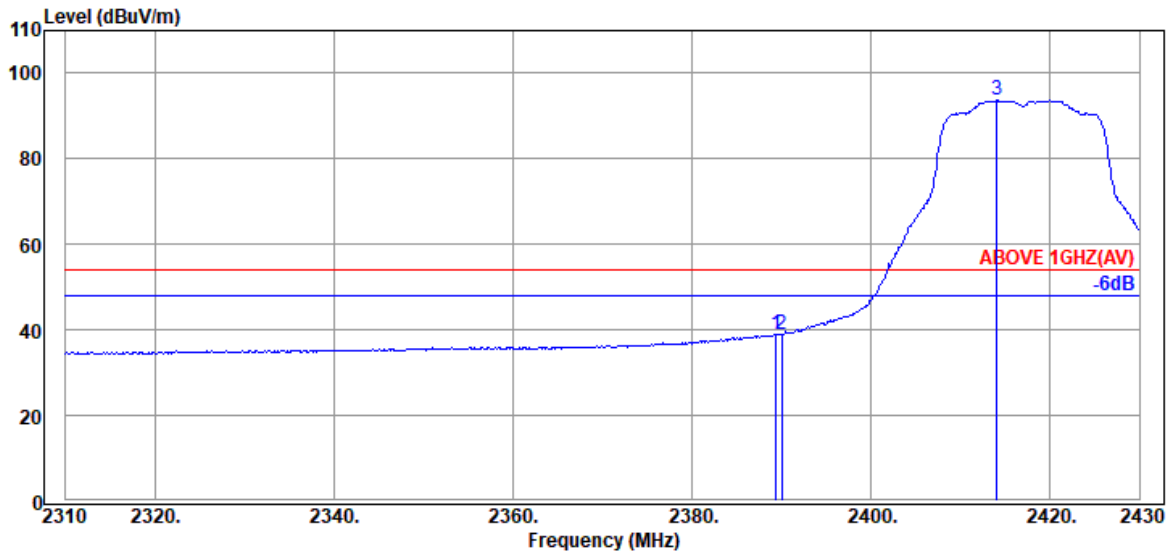


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.21	5.72	39.93	45.02	39.02	54.00	14.98	Average
2390.040	28.21	5.72	39.93	44.96	38.96	54.00	15.04	Average
@ 2414.040	28.19	5.76	39.93	99.59	93.61	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

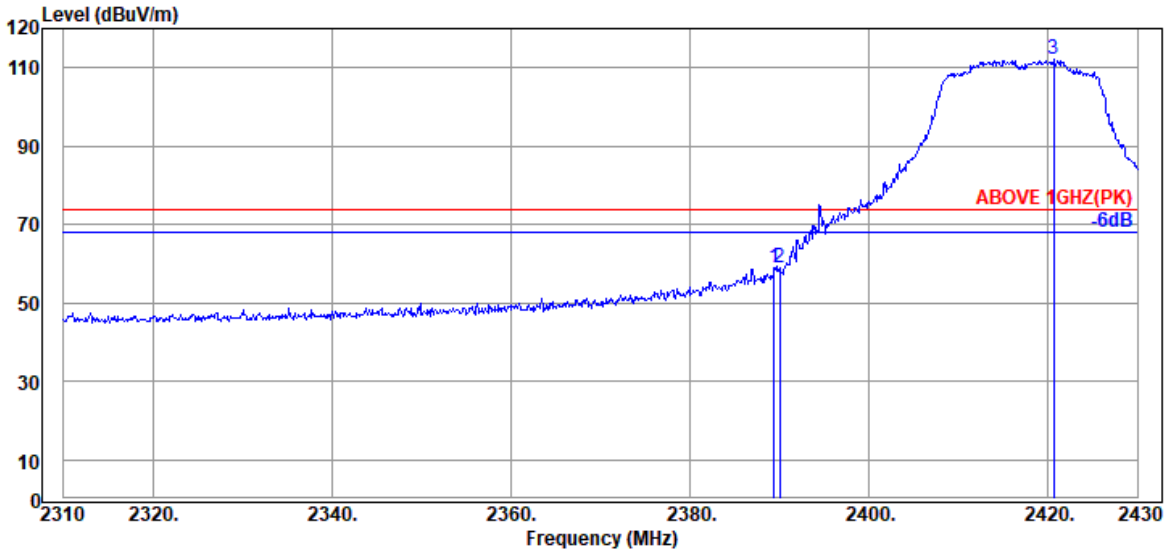

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.21	5.72	39.93	64.94	58.94	74.00	15.06	Peak
2390.040	28.21	5.72	39.93	65.04	59.04	74.00	14.96	Peak
@ 2420.640	28.23	5.77	39.93	117.90	111.97	---	---	Peak

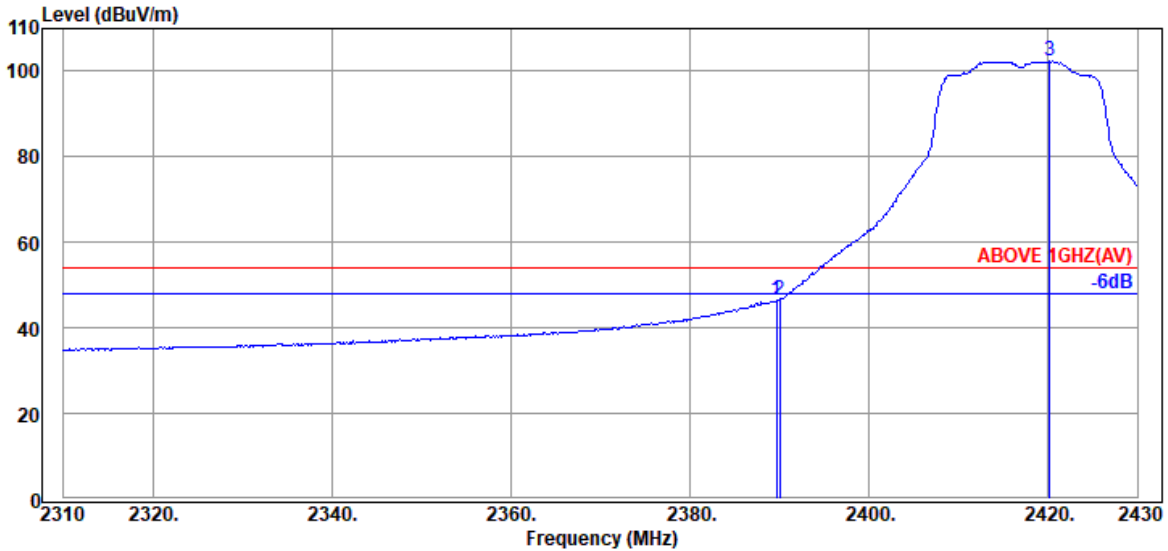


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	52.41	46.41	54.00	7.59	Average
2390.040	28.21	5.72	39.93	52.65	46.65	54.00	7.35	Average
@ 2420.160	28.23	5.77	39.93	108.28	102.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

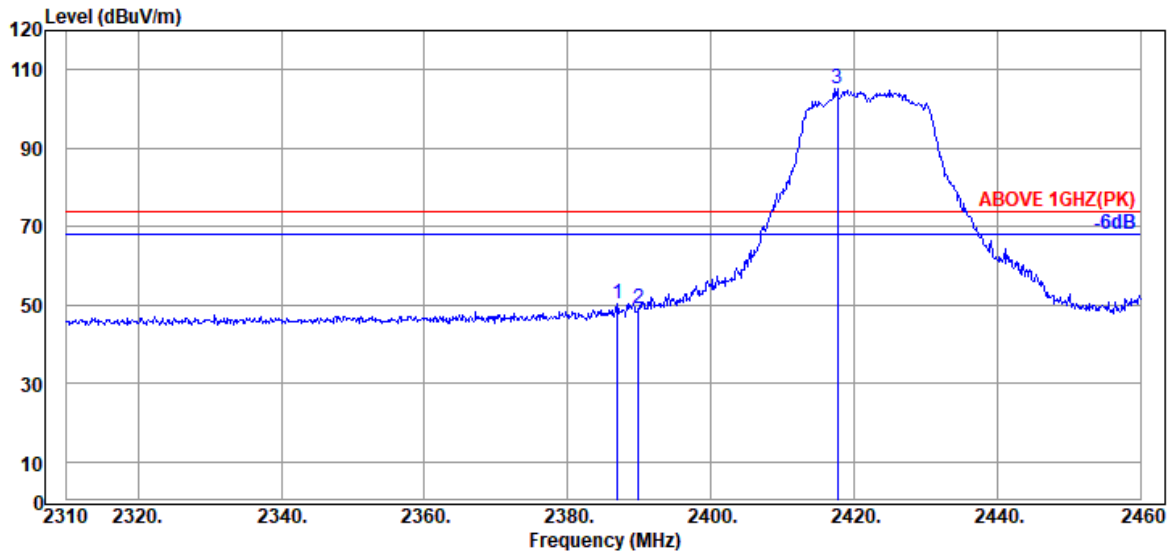

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.950	28.21	5.72	39.93	56.38	50.38	74.00	23.62	Peak
2389.950	28.21	5.72	39.93	55.08	49.08	74.00	24.92	Peak
@ 2417.700	28.19	5.76	39.93	111.09	105.11	---	---	Peak

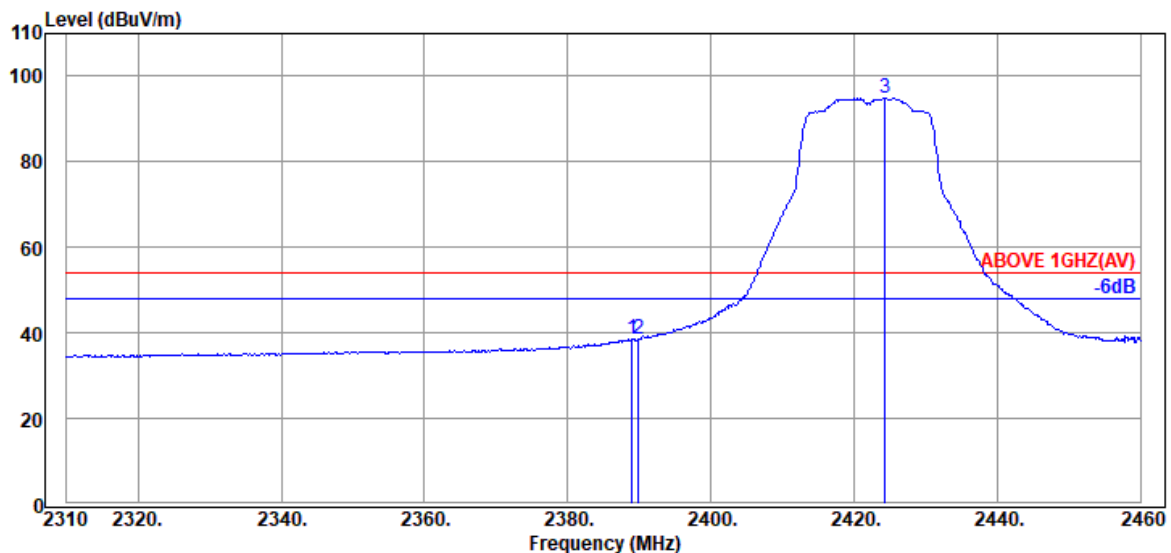


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.21	5.72	39.93	44.52	38.52	54.00	15.48	Average
2389.950	28.21	5.72	39.93	44.58	38.58	54.00	15.42	Average
@ 2424.300	28.23	5.77	39.93	100.86	94.93	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

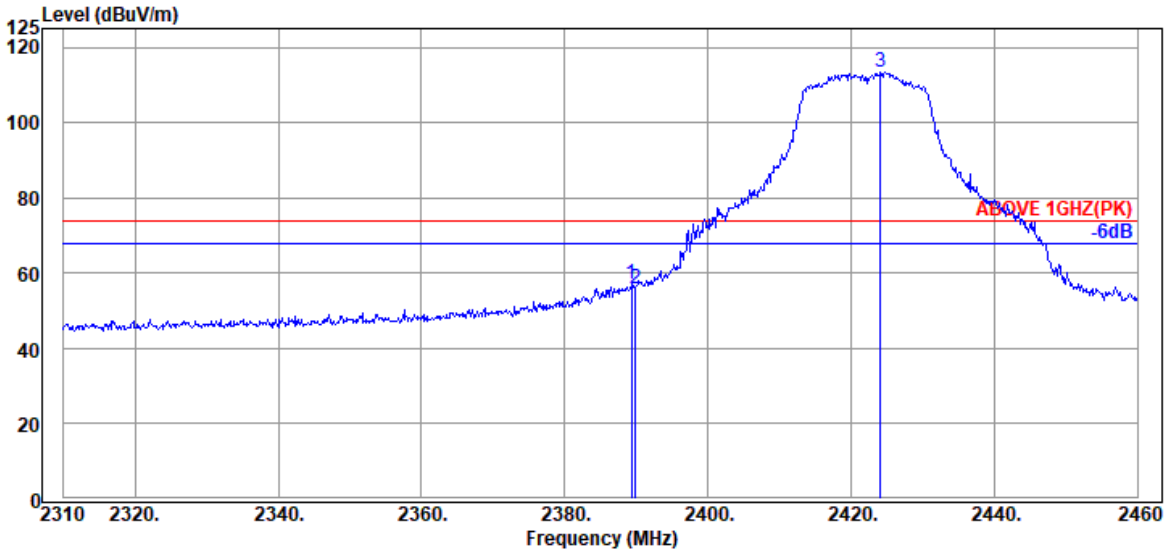

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.21	5.72	39.93	62.94	56.94	74.00	17.06	Peak
2389.950	28.21	5.72	39.93	61.73	55.73	74.00	18.27	Peak
@ 2424.150	28.23	5.77	39.93	119.47	113.54	---	---	Peak

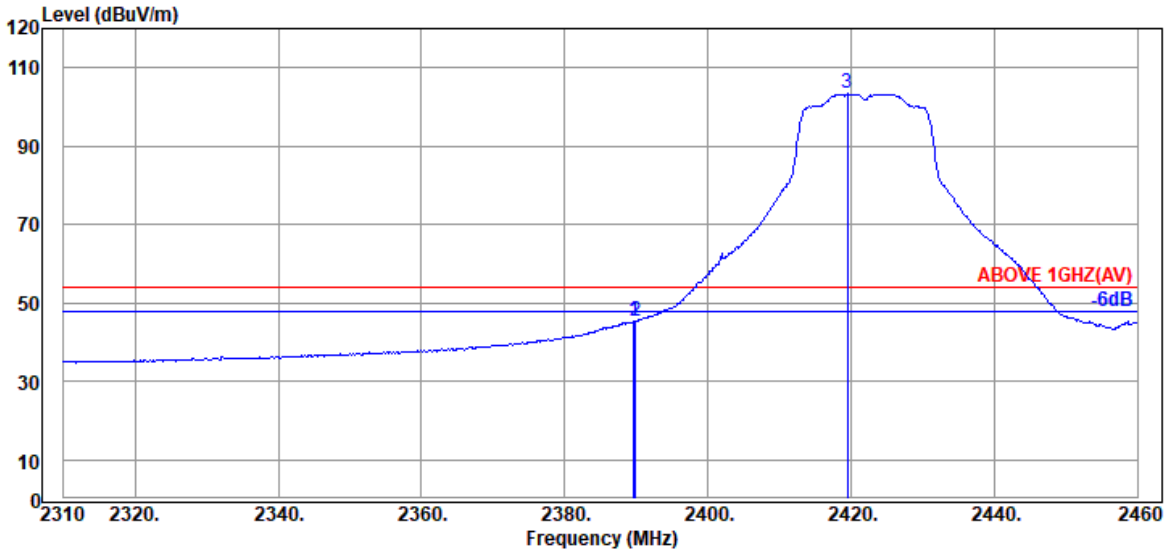


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.21	5.72	39.93	51.20	45.20	54.00	8.80	Average
2389.950	28.21	5.72	39.93	51.24	45.24	54.00	8.76	Average
@ 2419.500	28.23	5.77	39.93	109.31	103.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

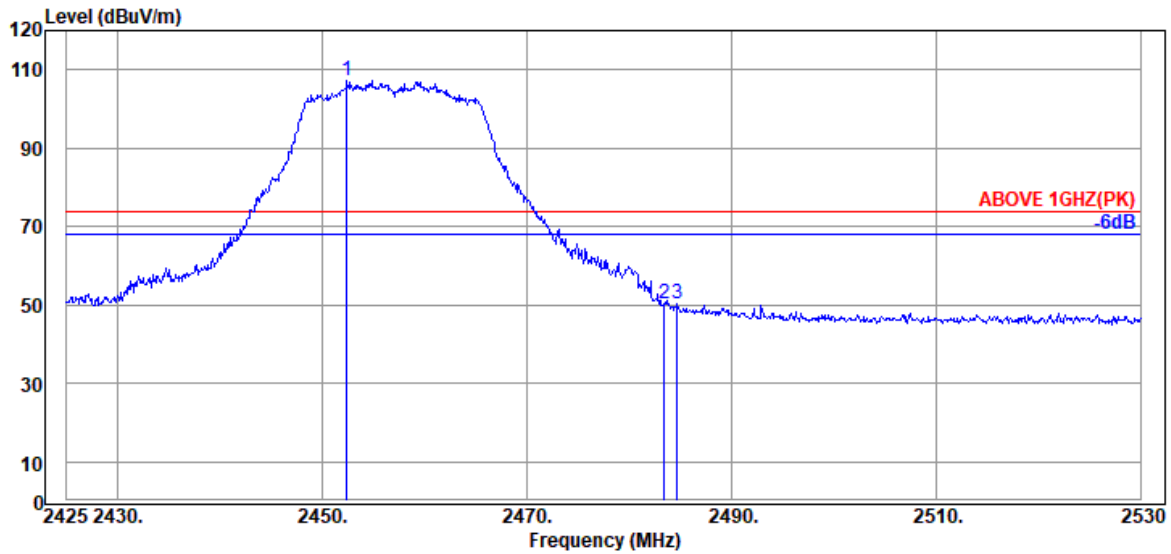

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.405	28.40	5.81	39.92	112.98	107.27	---	---	Peak
2483.485	28.47	5.87	39.92	55.94	50.36	74.00	23.64	Peak
2484.745	28.47	5.87	39.92	55.81	50.23	74.00	23.77	Peak

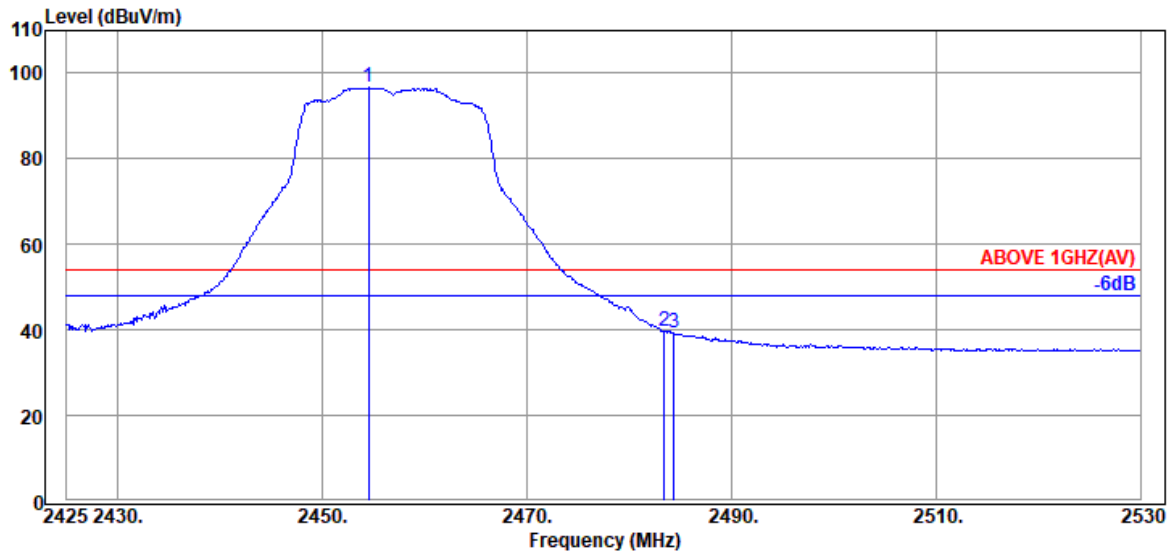


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.505	28.41	5.83	39.92	102.33	96.65	---	---	Average
2483.485	28.47	5.87	39.92	45.11	39.53	54.00	14.47	Average
2484.430	28.47	5.87	39.92	44.72	39.14	54.00	14.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

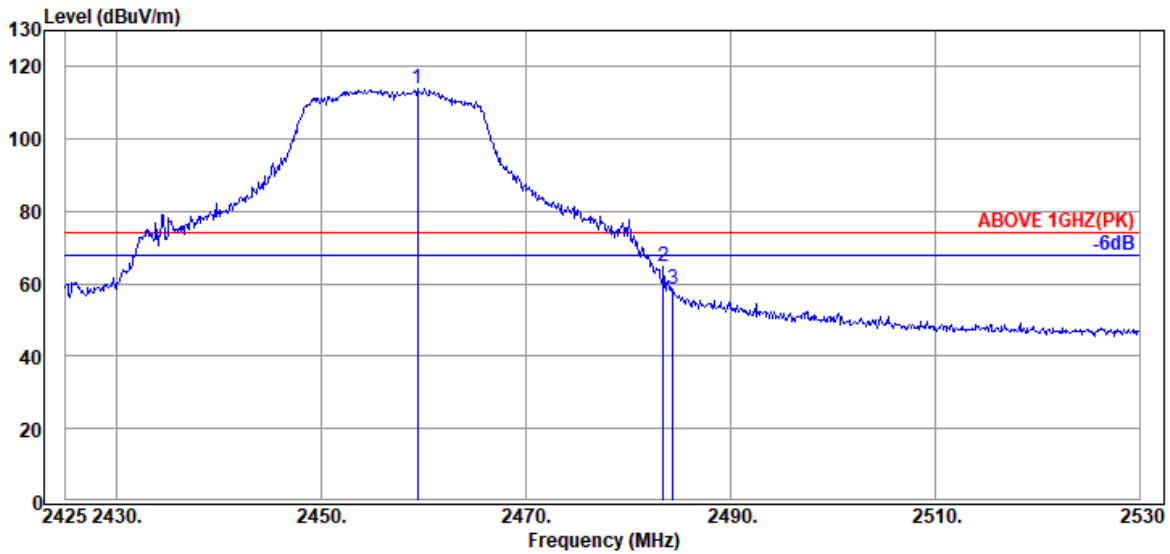

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.440	28.41	5.83	39.92	119.69	114.01	---	---	Peak
2483.485	28.47	5.87	39.92	70.40	64.82	74.00	9.18	Peak
2484.430	28.47	5.87	39.92	64.19	58.61	74.00	15.39	Peak

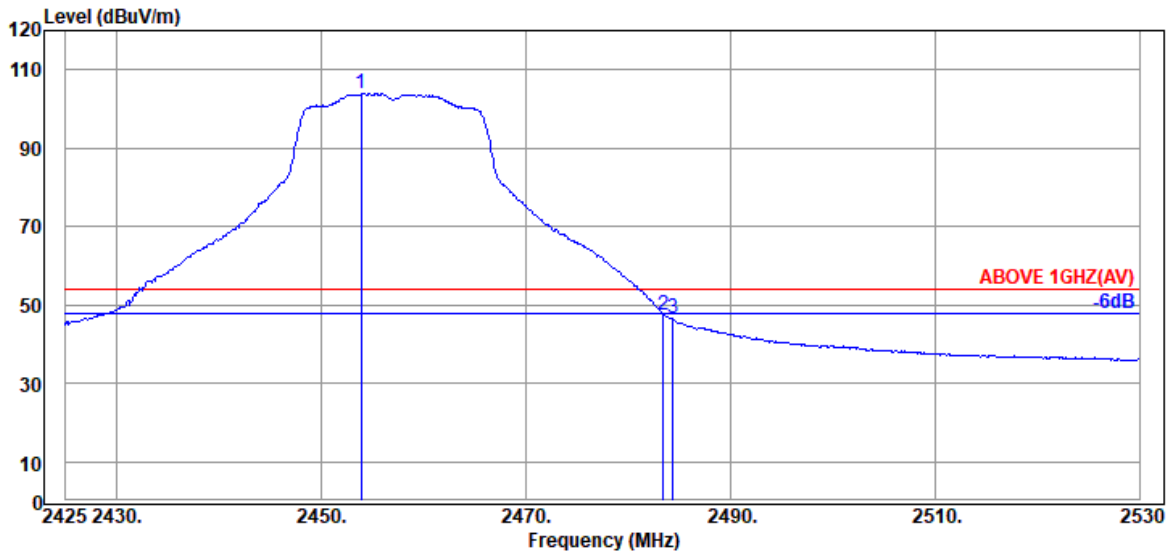


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.875	28.41	5.83	39.92	109.70	104.02	---	---	Average
2483.485	28.47	5.87	39.92	52.99	47.41	54.00	6.59	Average
2484.430	28.47	5.87	39.92	52.09	46.51	54.00	7.49	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

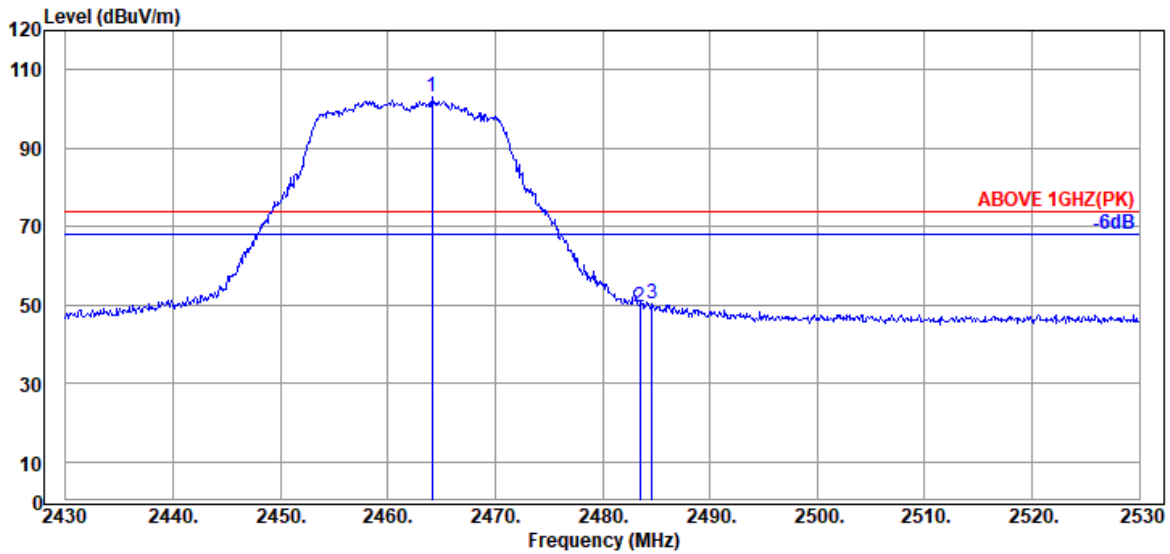

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	5.84	39.92	108.91	103.26	---	---	Peak
2483.500	28.47	5.87	39.92	55.05	49.47	74.00	24.53	Peak
2484.600	28.47	5.87	39.92	55.69	50.11	74.00	23.89	Peak

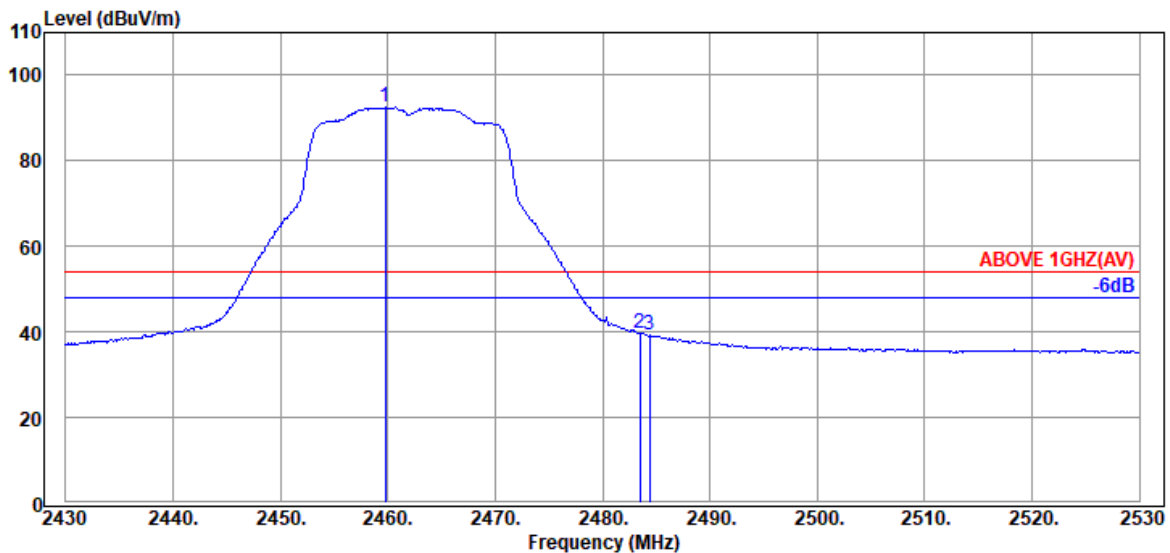


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	28.41	5.83	39.92	98.12	92.44	---	---	Average
2483.500	28.47	5.87	39.92	45.22	39.64	54.00	14.36	Average
2484.400	28.47	5.87	39.92	44.84	39.26	54.00	14.74	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

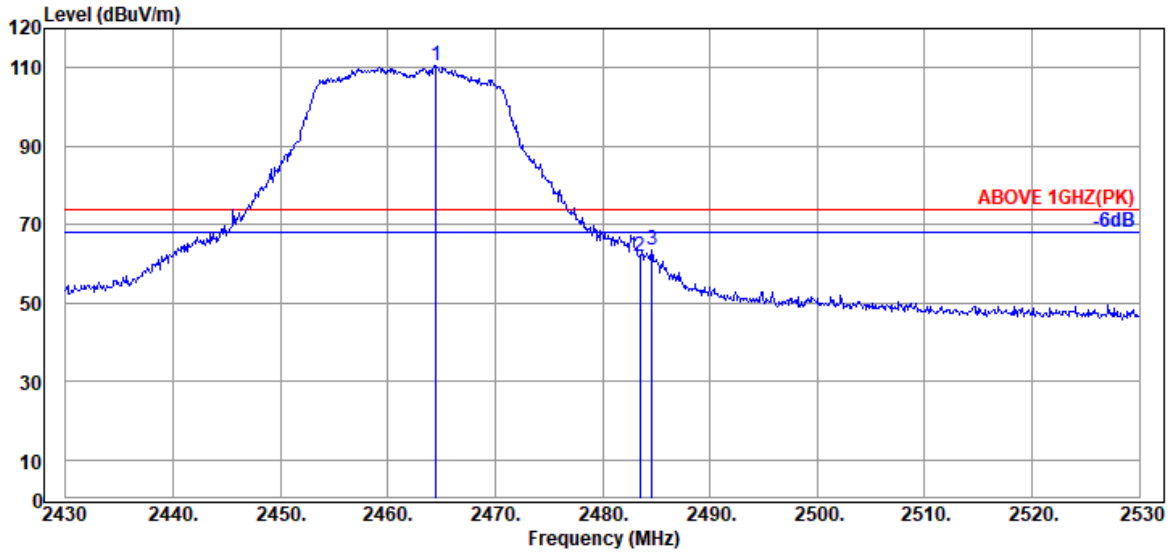

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.43	5.84	39.92	116.04	110.39	---	---	Peak
2483.500	28.47	5.87	39.92	67.28	61.70	74.00	12.30	Peak
2484.600	28.47	5.87	39.92	69.21	63.63	74.00	10.37	Peak

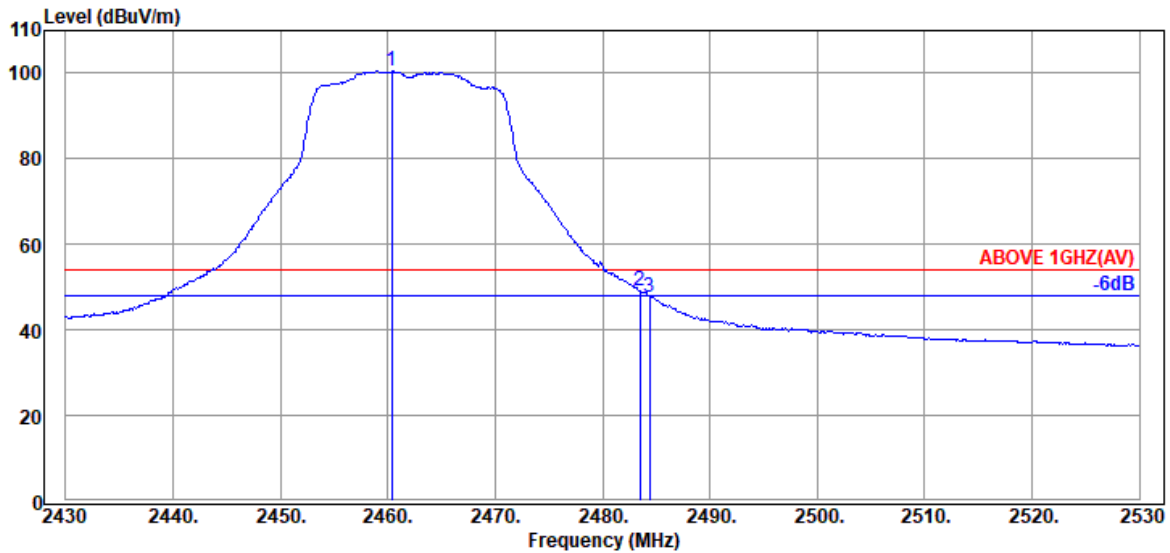


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	28.41	5.83	39.92	106.26	100.58	---	---	Average
2483.500	28.47	5.87	39.92	54.67	49.09	54.00	4.91	Average
2484.400	28.47	5.87	39.92	53.29	47.71	54.00	6.29	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

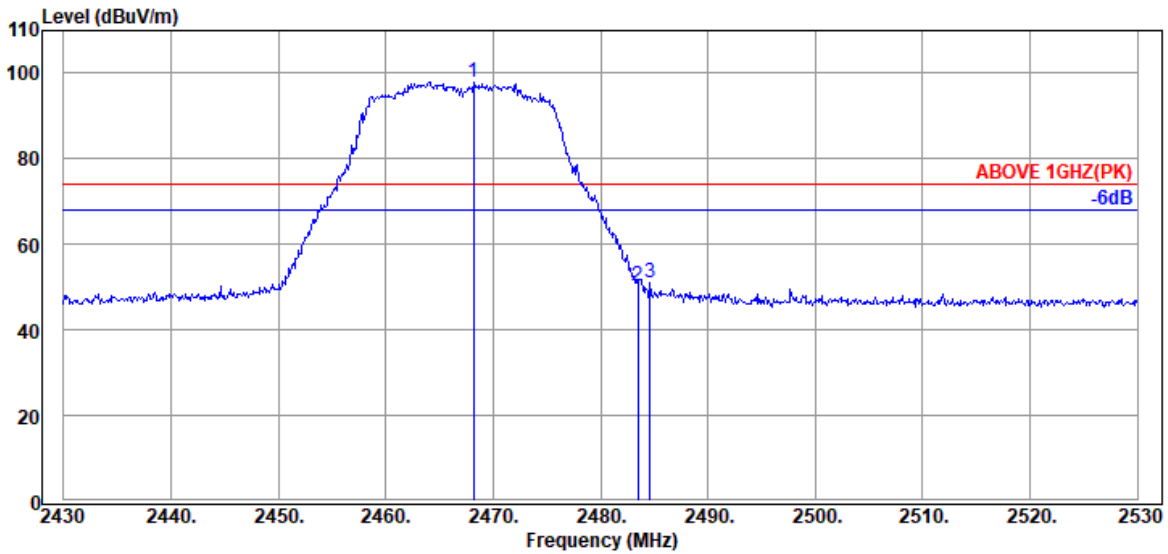

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	5.85	39.92	103.64	98.01	---	---	Peak
2483.500	28.47	5.87	39.92	55.86	50.28	74.00	23.72	Peak
2484.600	28.47	5.87	39.92	56.76	51.18	74.00	22.82	Peak

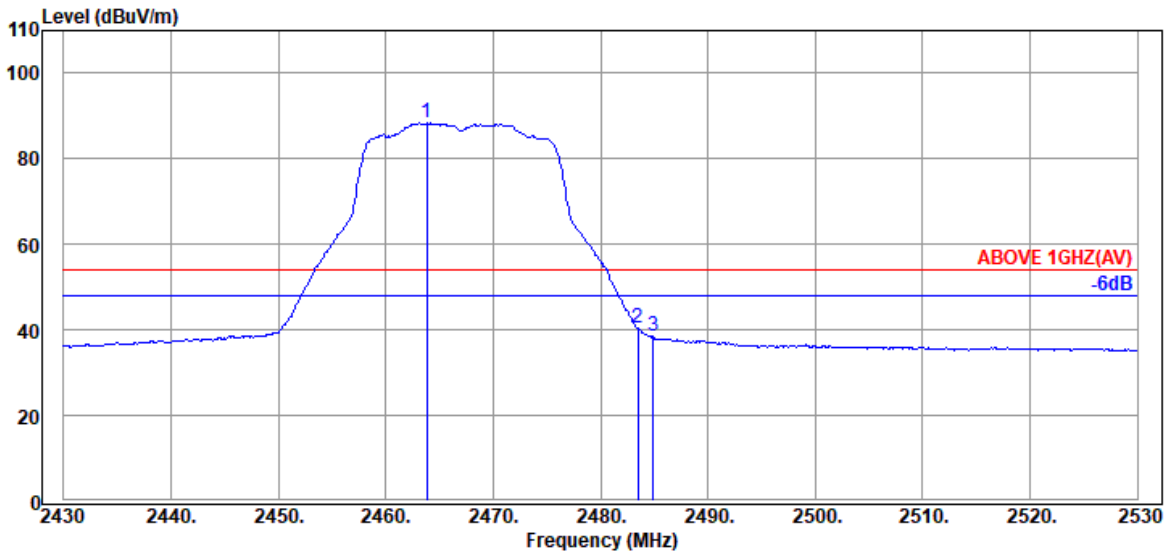


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.43	5.84	39.92	93.97	88.32	---	---	Average
2483.500	28.47	5.87	39.92	45.85	40.27	54.00	13.73	Average
2484.900	28.47	5.87	39.92	44.29	38.71	54.00	15.29	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

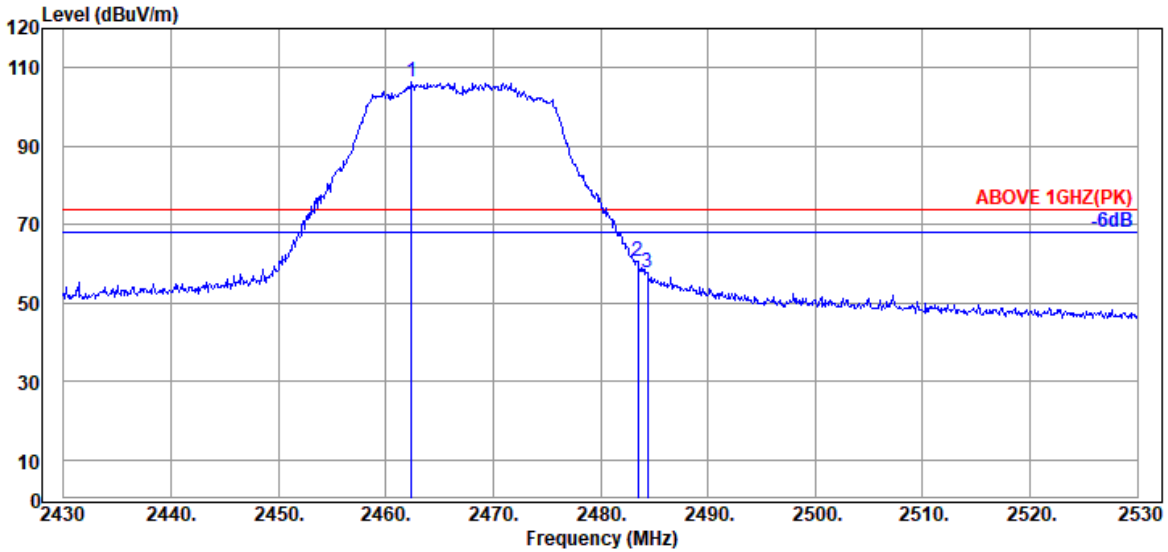

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.400	28.43	5.84	39.92	111.87	106.22	---	---	Peak
2483.500	28.47	5.87	39.92	66.07	60.49	74.00	13.51	Peak
2484.400	28.47	5.87	39.92	63.19	57.61	74.00	16.39	Peak

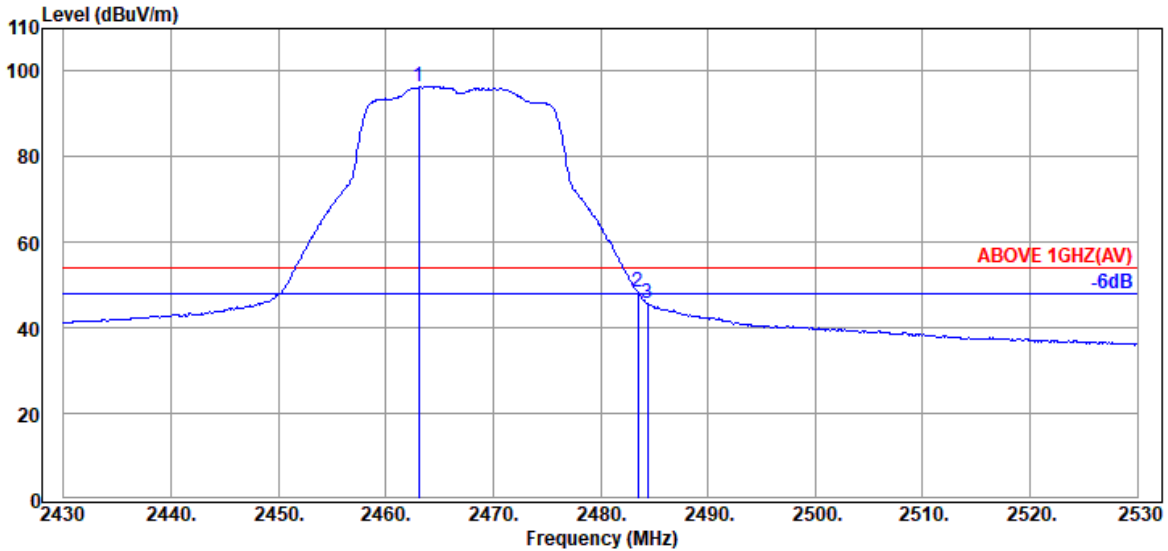


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.100	28.43	5.84	39.92	102.10	96.45	---	---	Average
2483.500	28.47	5.87	39.92	53.88	48.30	54.00	5.70	Average
2484.400	28.47	5.87	39.92	51.39	45.81	54.00	8.19	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

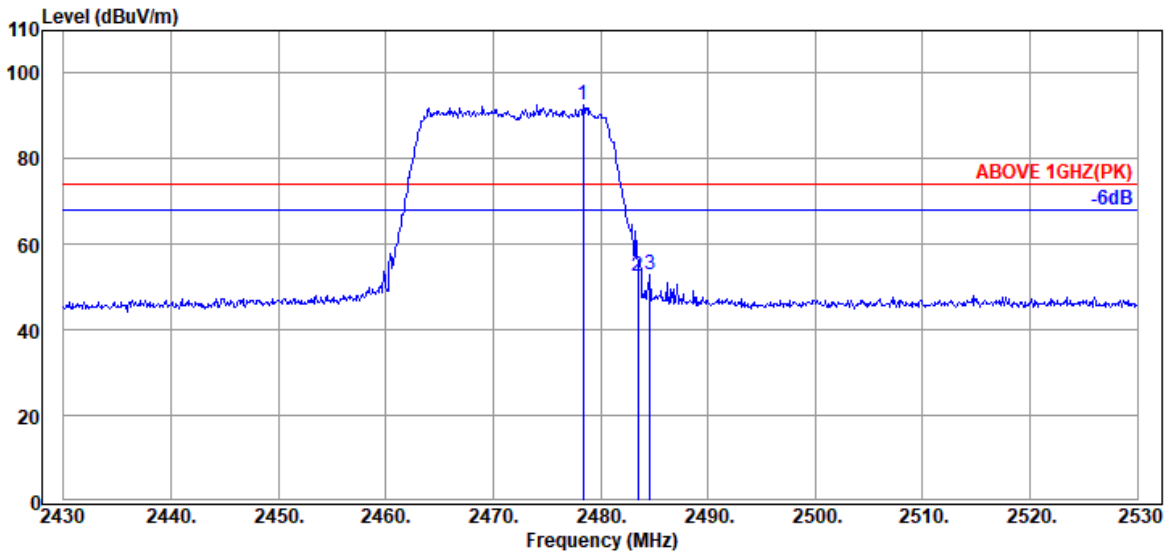

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.46	5.86	39.92	98.40	92.80	---	---	Peak
2483.500	28.47	5.87	39.92	58.01	52.43	74.00	21.57	Peak
2484.600	28.47	5.87	39.92	58.59	53.01	74.00	20.99	Peak

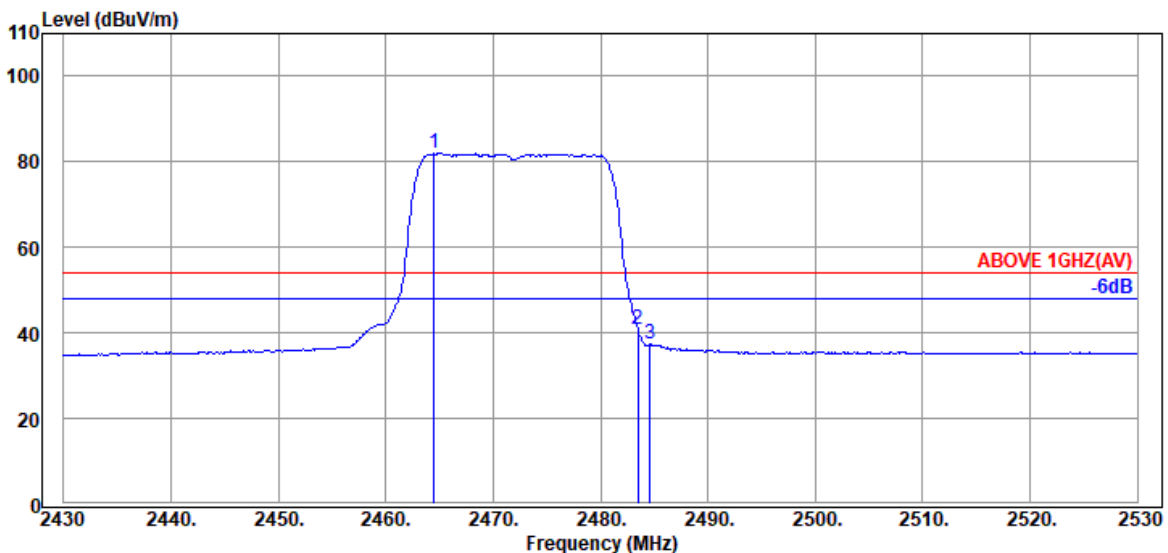


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.43	5.84	39.92	87.57	81.92	---	---	Average
2483.500	28.47	5.87	39.92	46.31	40.73	54.00	13.27	Average
2484.600	28.47	5.87	39.92	42.83	37.25	54.00	16.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

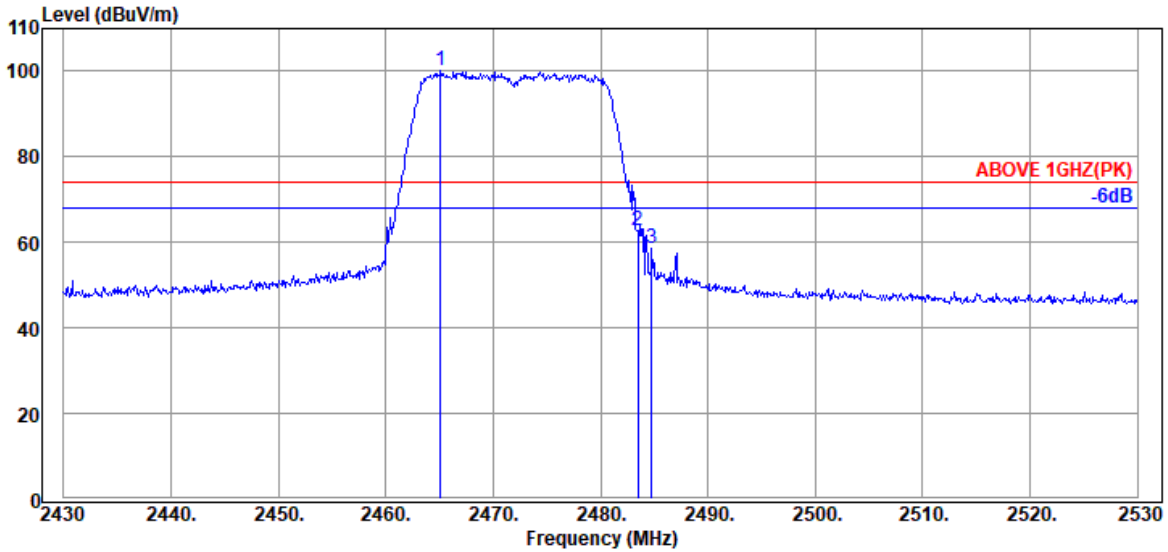

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.43	5.84	39.92	105.88	100.23	---	---	Peak
2483.500	28.47	5.87	39.92	68.34	62.76	74.00	11.24	Peak
2484.800	28.47	5.87	39.92	64.03	58.45	74.00	15.55	Peak

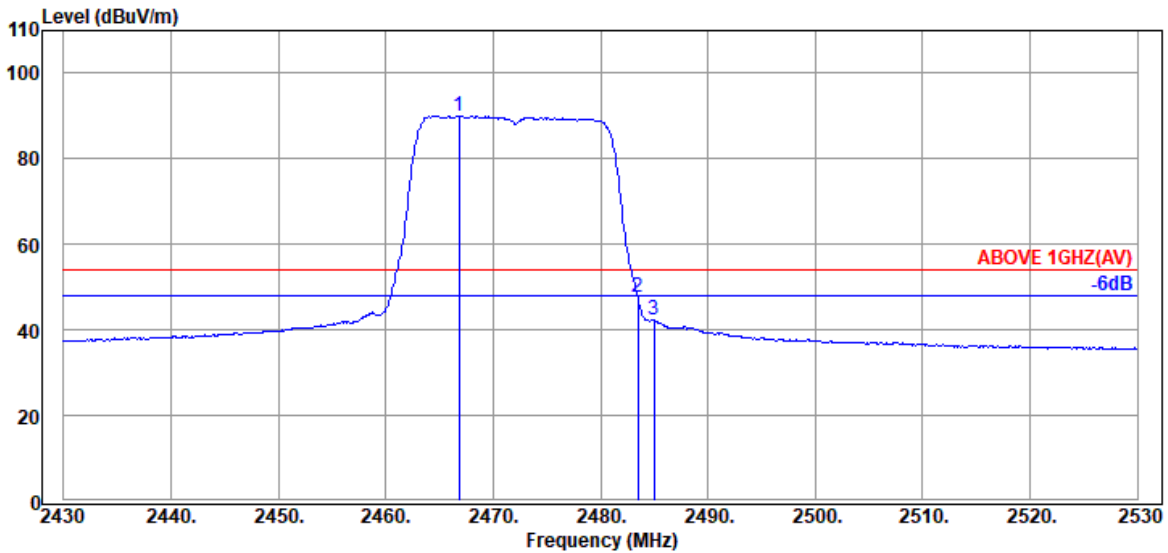


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.800	28.43	5.84	39.92	95.75	90.10	---	---	Average
2483.500	28.47	5.87	39.92	53.14	47.56	54.00	6.44	Average
2485.000	28.47	5.87	39.92	48.10	42.52	54.00	11.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

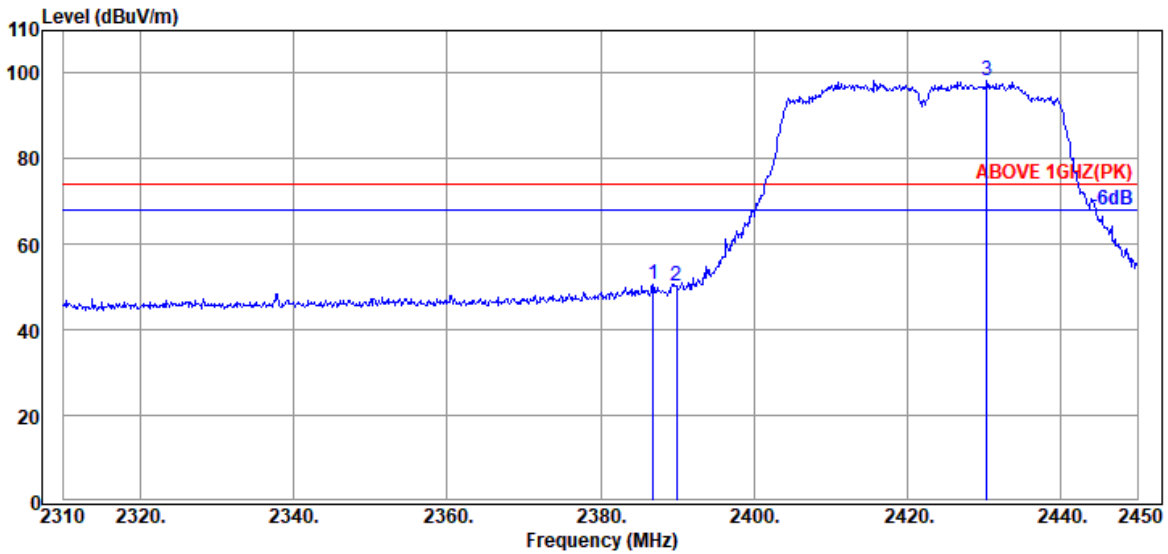

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2386.860	28.21	5.72	39.93	56.59	50.59	74.00	23.41	Peak
2389.940	28.21	5.72	39.93	56.26	50.26	74.00	23.74	Peak
@ 2430.400	28.27	5.78	39.93	104.10	98.22	---	---	Peak

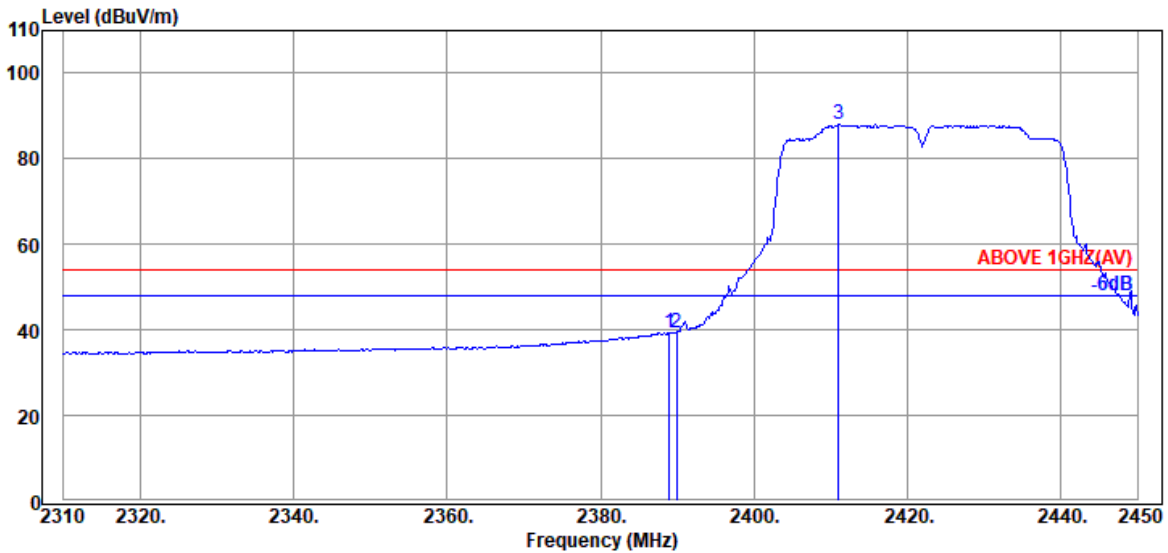


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.21	5.72	39.93	45.35	39.35	54.00	14.65	Average
2389.940	28.21	5.72	39.93	45.30	39.30	54.00	14.70	Average
@ 2411.080	28.14	5.75	39.93	94.05	88.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

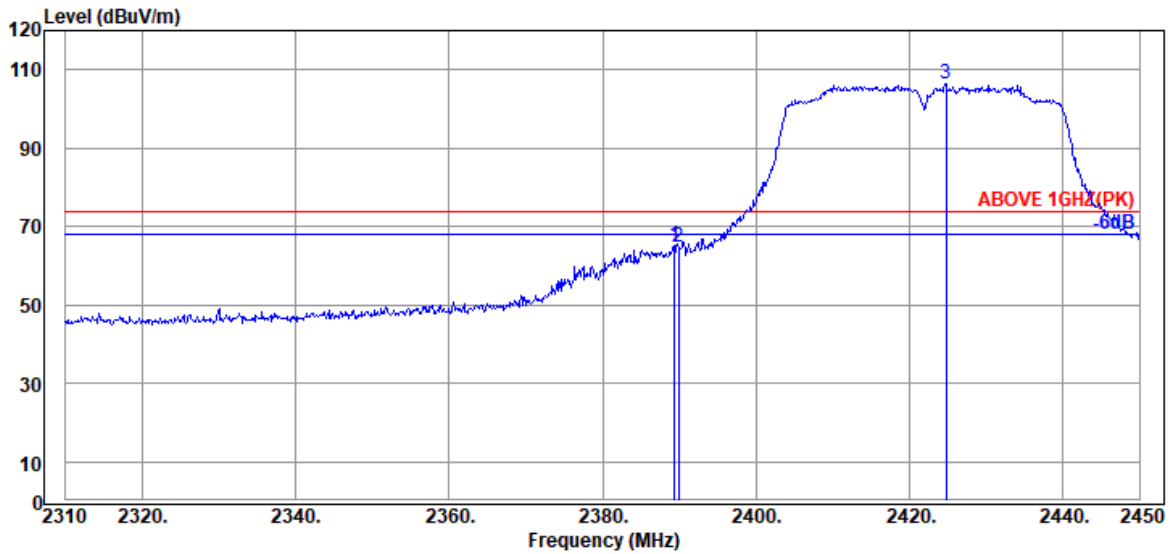

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.380	28.21	5.72	39.93	71.18	65.18	74.00	8.82	Peak
2389.940	28.21	5.72	39.93	70.59	64.59	74.00	9.41	Peak
@ 2424.800	28.23	5.77	39.93	112.37	106.44	---	---	Peak

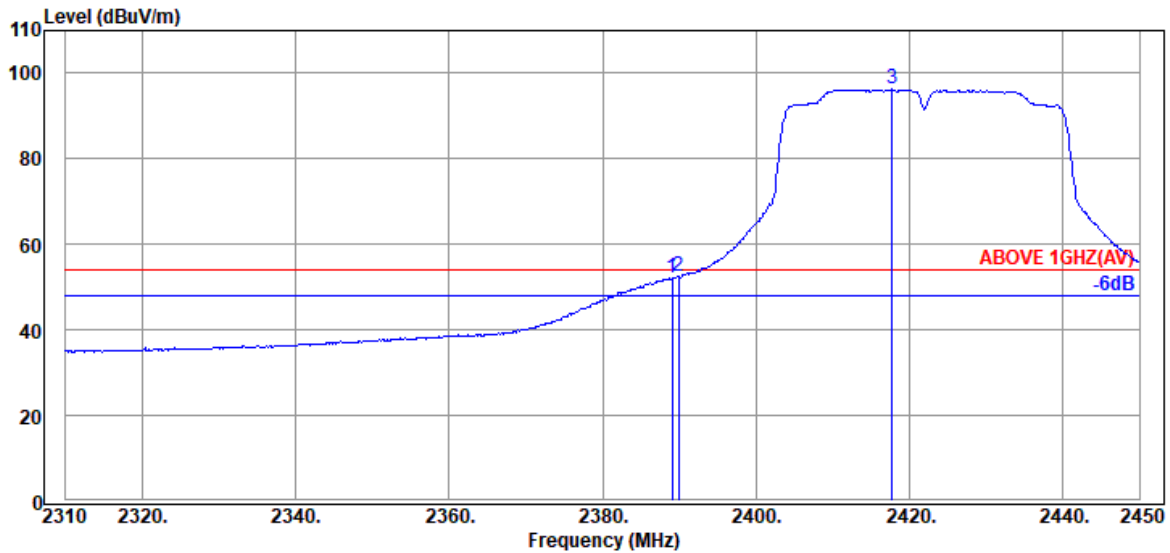


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.21	5.72	39.93	58.14	52.14	54.00	1.86	Average
2389.940	28.21	5.72	39.93	58.38	52.38	54.00	1.62	Average
@ 2417.800	28.19	5.76	39.93	102.20	96.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

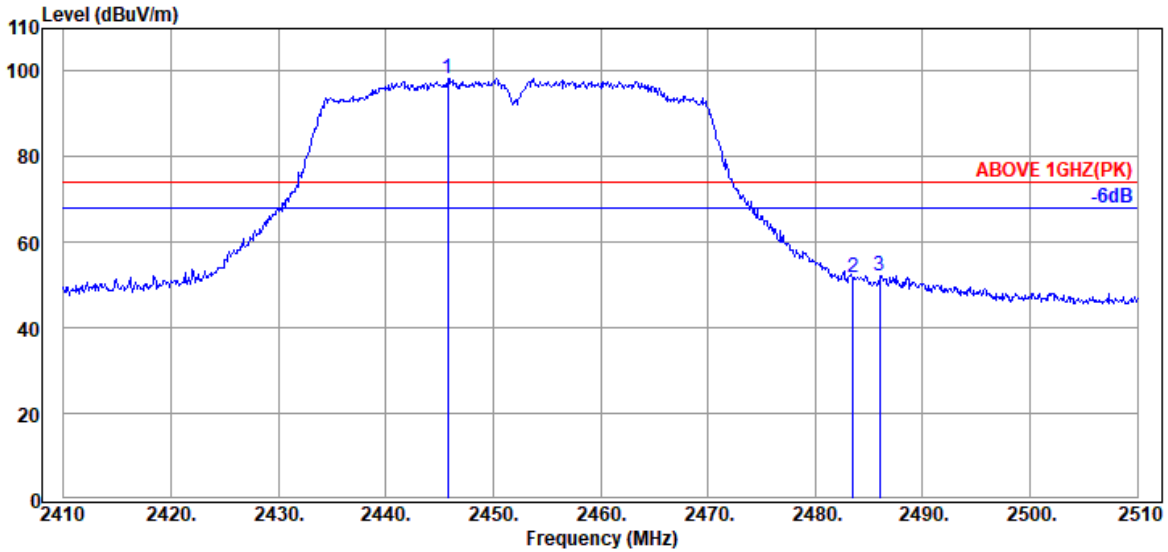

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.800	28.36	5.80	39.93	103.96	98.19	---	---	Peak
2483.500	28.47	5.87	39.92	57.43	51.85	74.00	22.15	Peak
2486.000	28.47	5.87	39.92	57.89	52.31	74.00	21.69	Peak

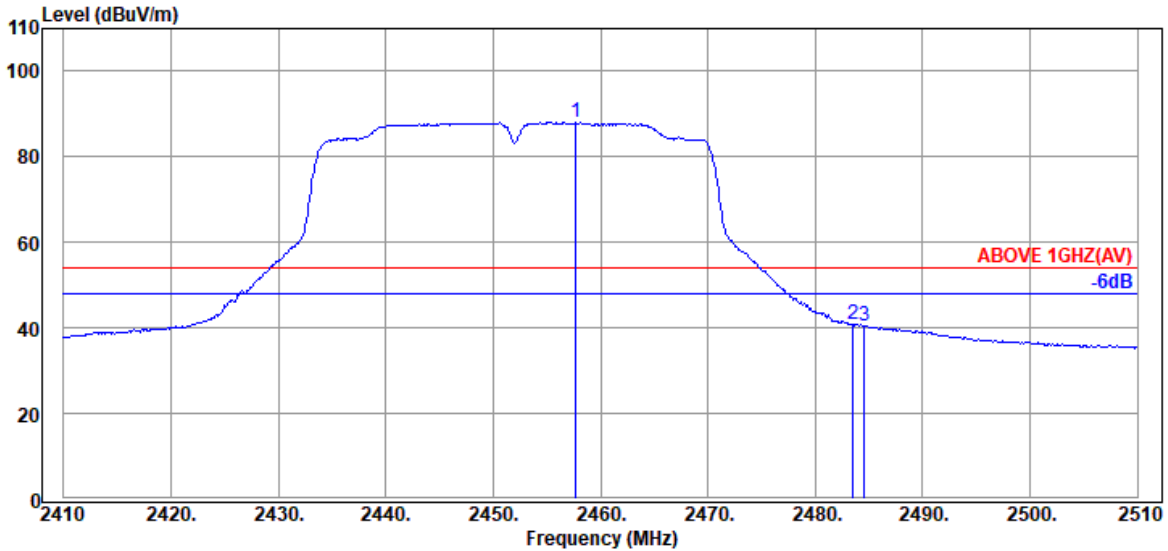


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2457.700	28.41	5.83	39.92	93.76	88.08	---	---	Average
2483.500	28.47	5.87	39.92	46.38	40.80	54.00	13.20	Average
2484.600	28.47	5.87	39.92	46.05	40.47	54.00	13.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

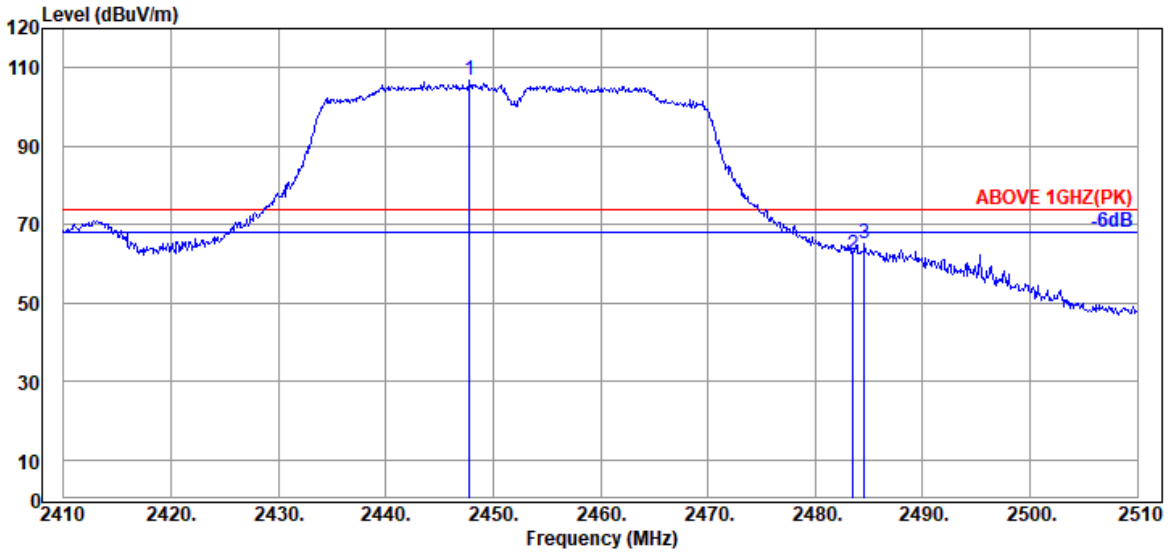

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.800	28.40	5.81	39.93	112.40	106.68	---	---	Peak
2483.500	28.47	5.87	39.92	67.74	62.16	74.00	11.84	Peak
2484.600	28.47	5.87	39.92	70.65	65.07	74.00	8.93	Peak

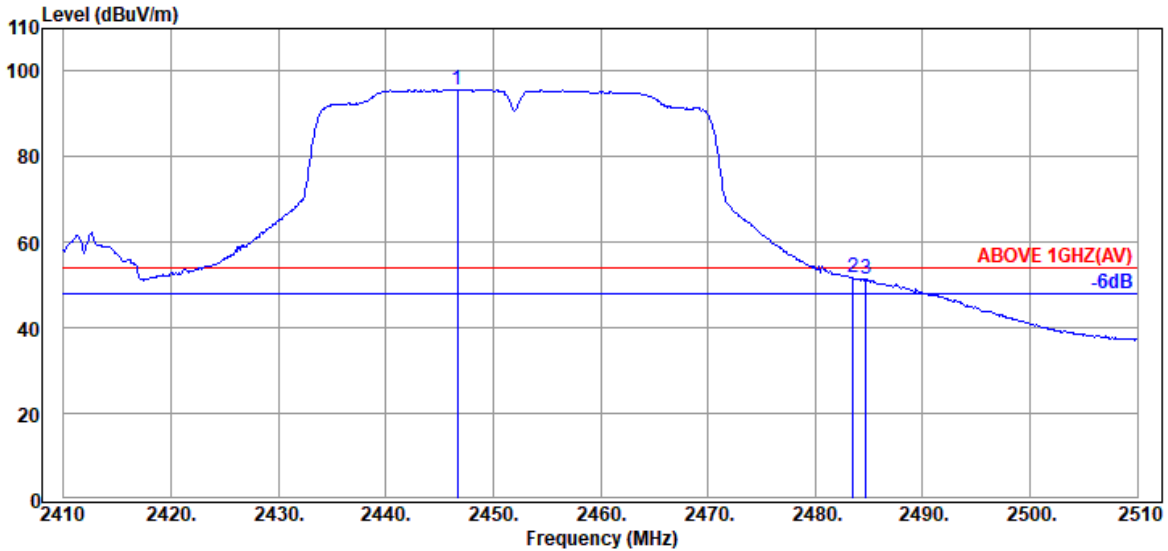


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.700	28.40	5.81	39.93	101.47	95.75	---	---	Average
2483.500	28.47	5.87	39.92	57.27	51.69	54.00	2.31	Average
2484.700	28.47	5.87	39.92	57.03	51.45	54.00	2.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

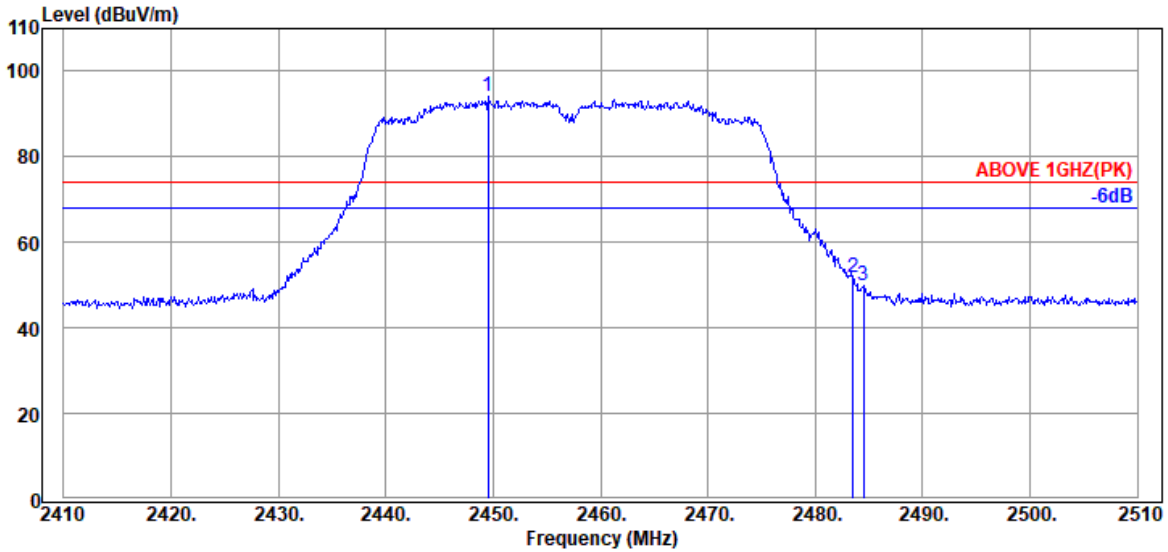

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.500	28.40	5.81	39.93	99.70	93.98	---	---	Peak
2483.500	28.47	5.87	39.92	57.37	51.79	74.00	22.21	Peak
2484.500	28.47	5.87	39.92	55.47	49.89	74.00	24.11	Peak

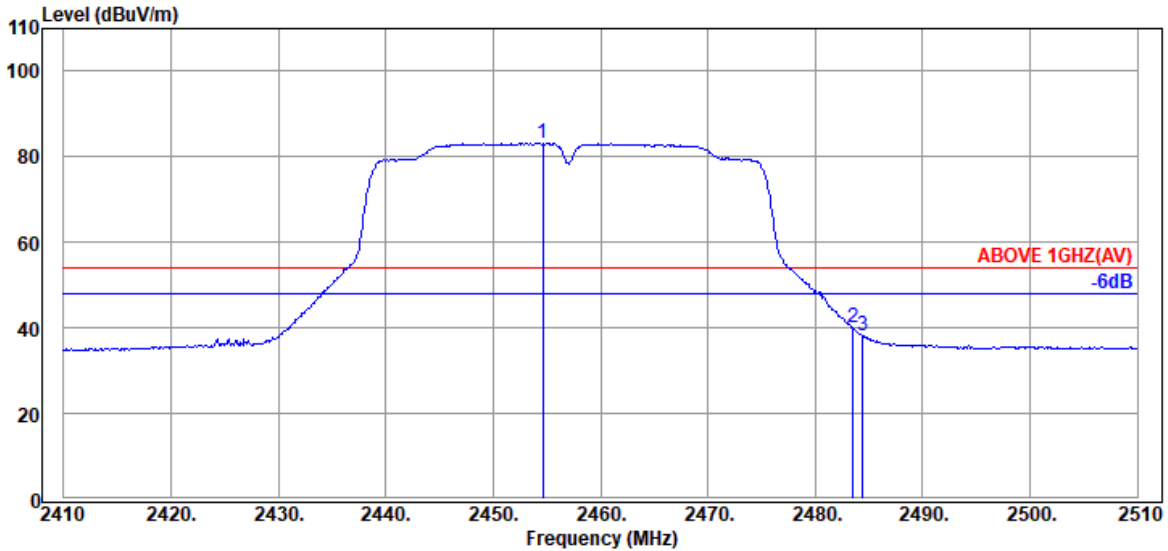


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.600	28.41	5.83	39.92	88.86	83.18	---	---	Average
2483.500	28.47	5.87	39.92	45.49	39.91	54.00	14.09	Average
2484.400	28.47	5.87	39.92	43.93	38.35	54.00	15.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

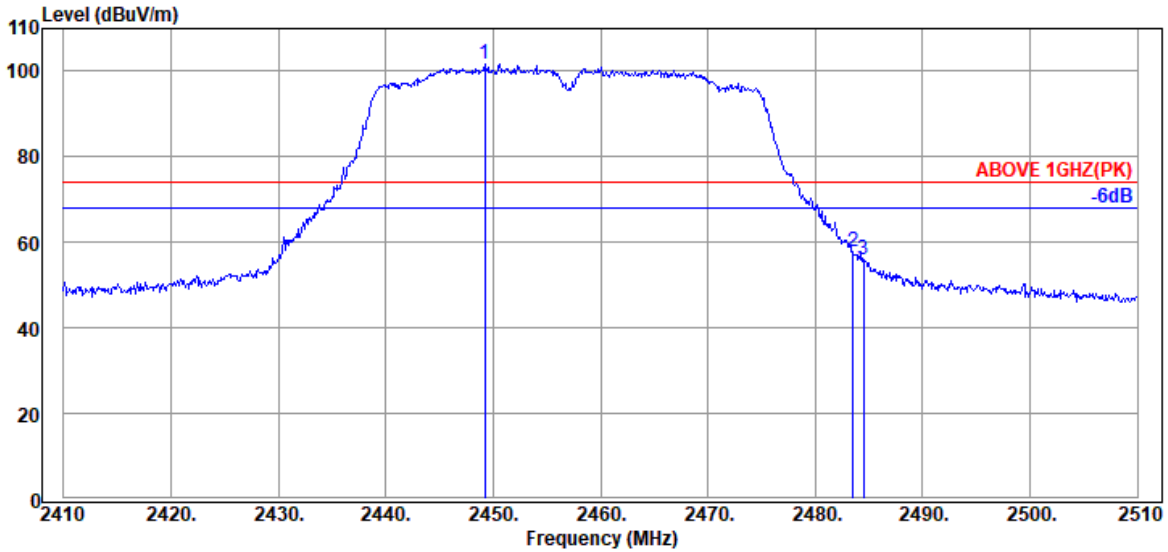

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.200	28.40	5.81	39.93	107.33	101.61	---	---	Peak
2483.500	28.47	5.87	39.92	63.60	58.02	74.00	15.98	Peak
2484.500	28.47	5.87	39.92	61.46	55.88	74.00	18.12	Peak

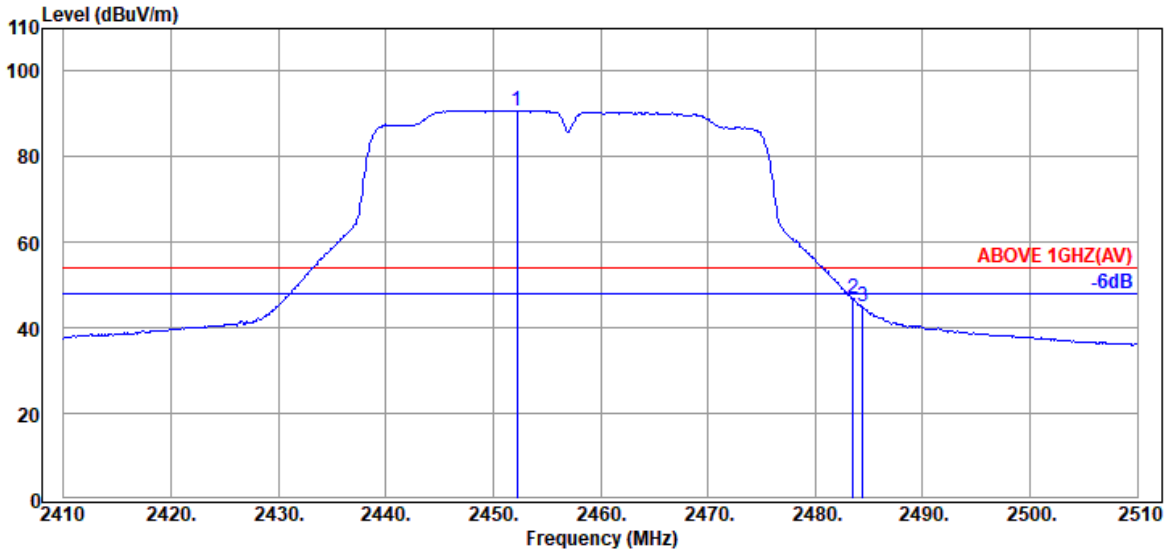


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.200	28.40	5.81	39.92	96.61	90.90	---	---	Average
2483.500	28.47	5.87	39.92	52.28	46.70	54.00	7.30	Average
2484.400	28.47	5.87	39.92	50.55	44.97	54.00	9.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

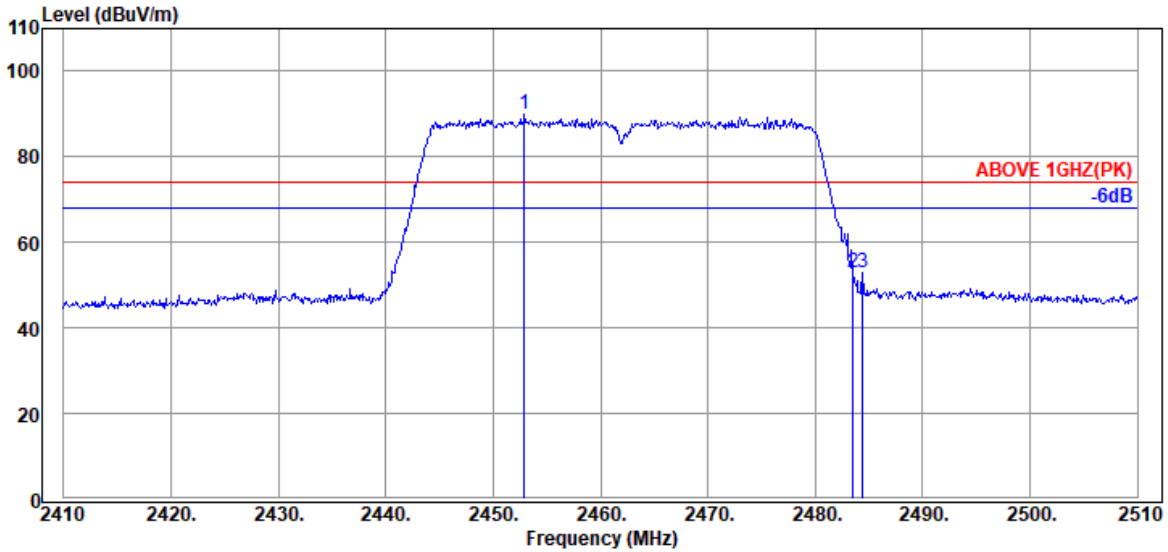

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.900	28.40	5.81	39.92	95.77	90.06	---	---	Peak
2483.500	28.47	5.87	39.92	58.50	52.92	74.00	21.08	Peak
2484.400	28.47	5.87	39.92	58.39	52.81	74.00	21.19	Peak

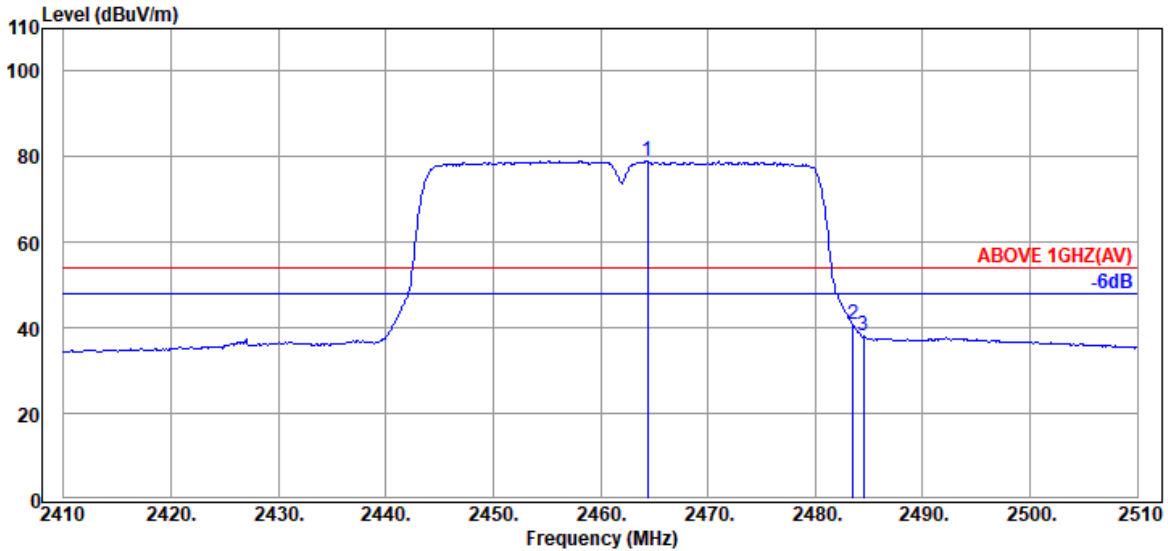


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	28.43	5.84	39.92	84.58	78.93	---	---	Average
2483.500	28.47	5.87	39.92	46.49	40.91	54.00	13.09	Average
2484.500	28.47	5.87	39.92	43.61	38.03	54.00	15.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

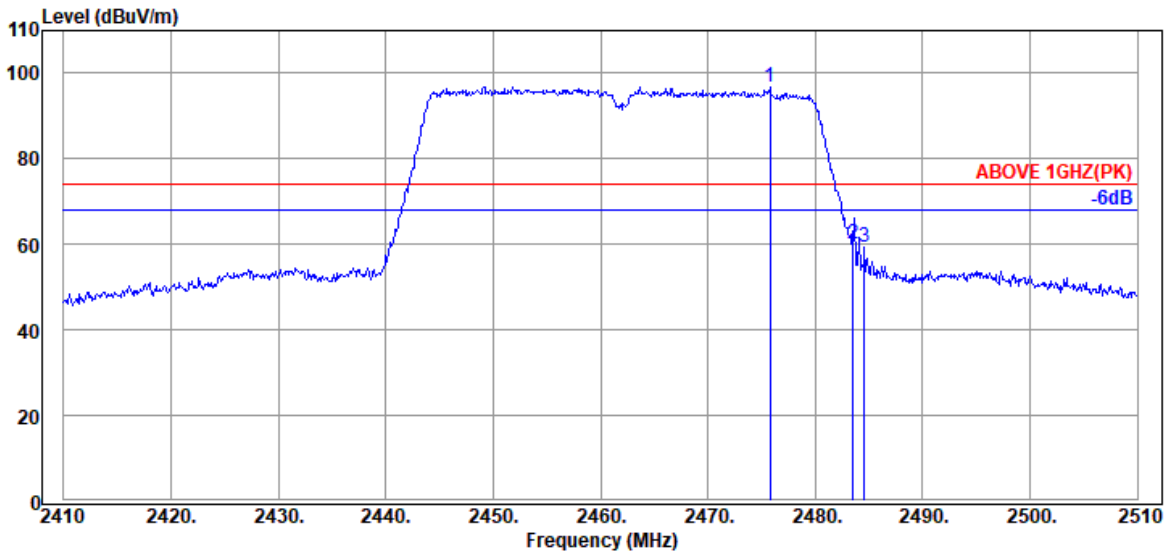

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.800	28.46	5.86	39.92	102.55	96.95	---	---	Peak
2483.500	28.47	5.87	39.92	65.80	60.22	74.00	13.78	Peak
2484.600	28.47	5.87	39.92	65.06	59.48	74.00	14.52	Peak

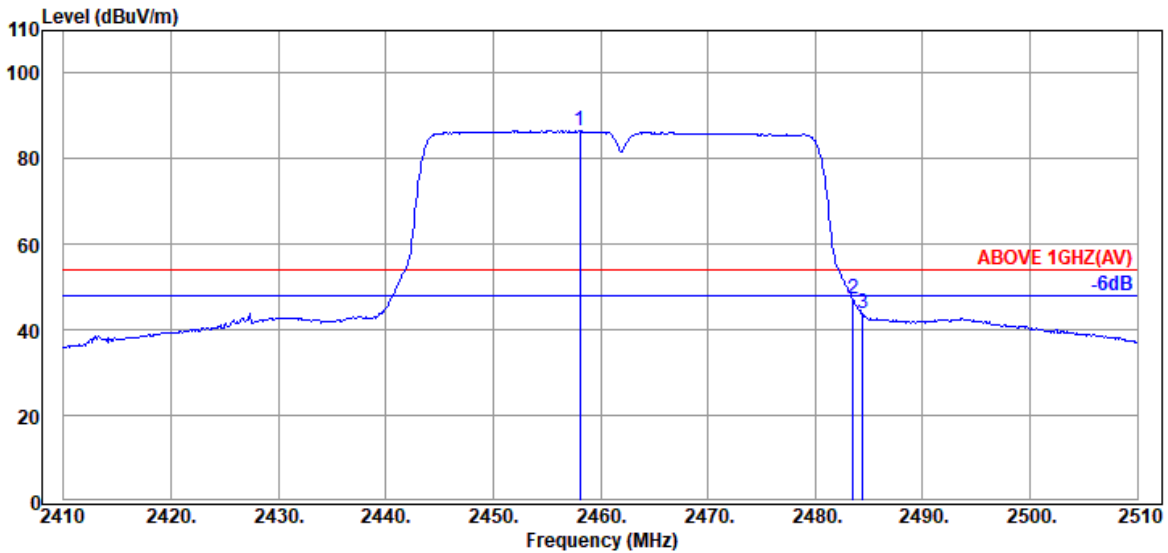


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.41	5.83	39.92	92.31	86.63	---	---	Average
2483.500	28.47	5.87	39.92	52.78	47.20	54.00	6.80	Average
2484.400	28.47	5.87	39.92	49.25	43.67	54.00	10.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

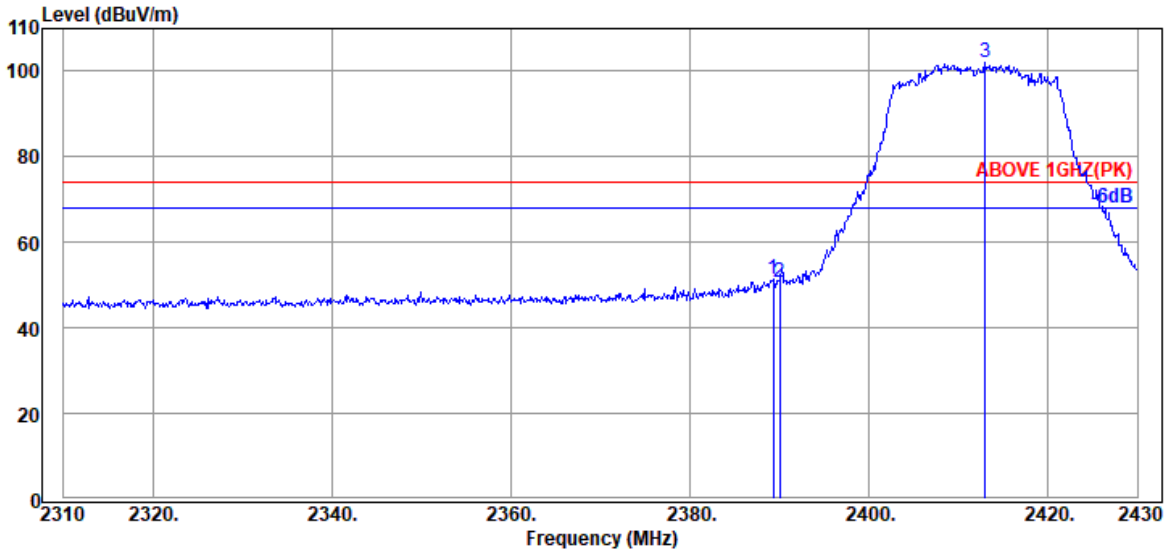

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	57.42	51.42	74.00	22.58	Peak
2390.040	28.21	5.72	39.93	56.58	50.58	74.00	23.42	Peak
@ 2412.960	28.19	5.76	39.93	107.98	102.00	---	---	Peak

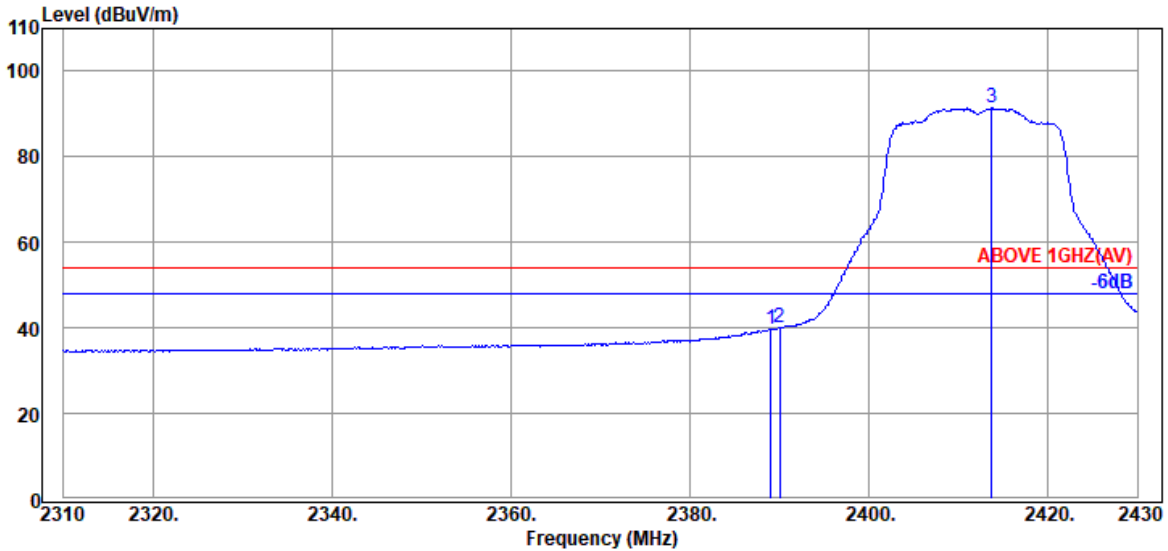


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.080	28.21	5.72	39.93	45.82	39.82	54.00	14.18	Average
2390.040	28.21	5.72	39.93	45.98	39.98	54.00	14.02	Average
@ 2413.680	28.19	5.76	39.93	97.45	91.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

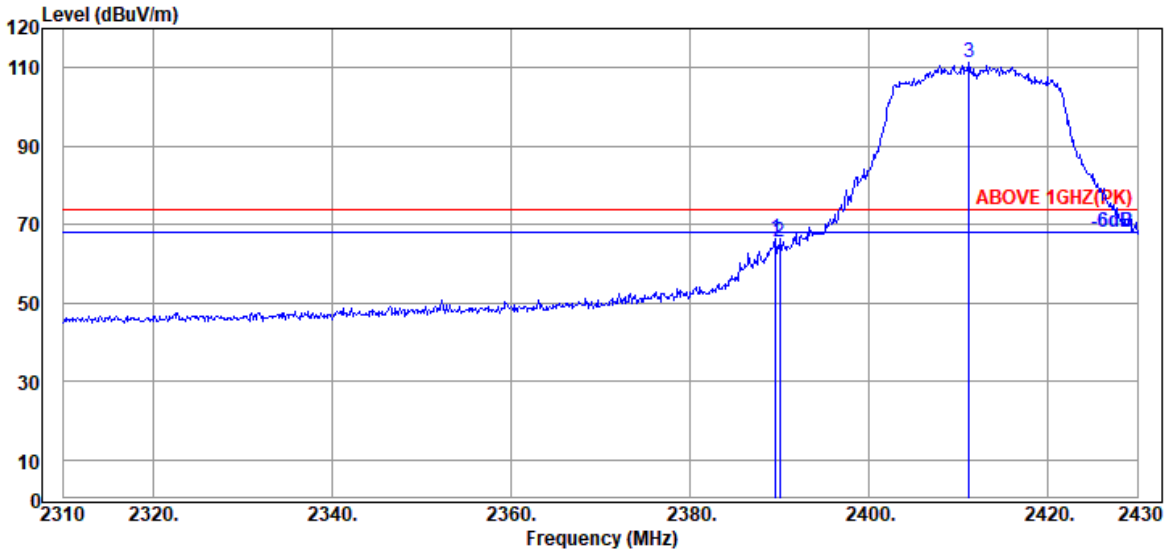

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	72.41	66.41	74.00	7.59	Peak
2390.040	28.21	5.72	39.93	71.52	65.52	74.00	8.48	Peak
@ 2411.160	28.14	5.75	39.93	117.40	111.36	---	---	Peak

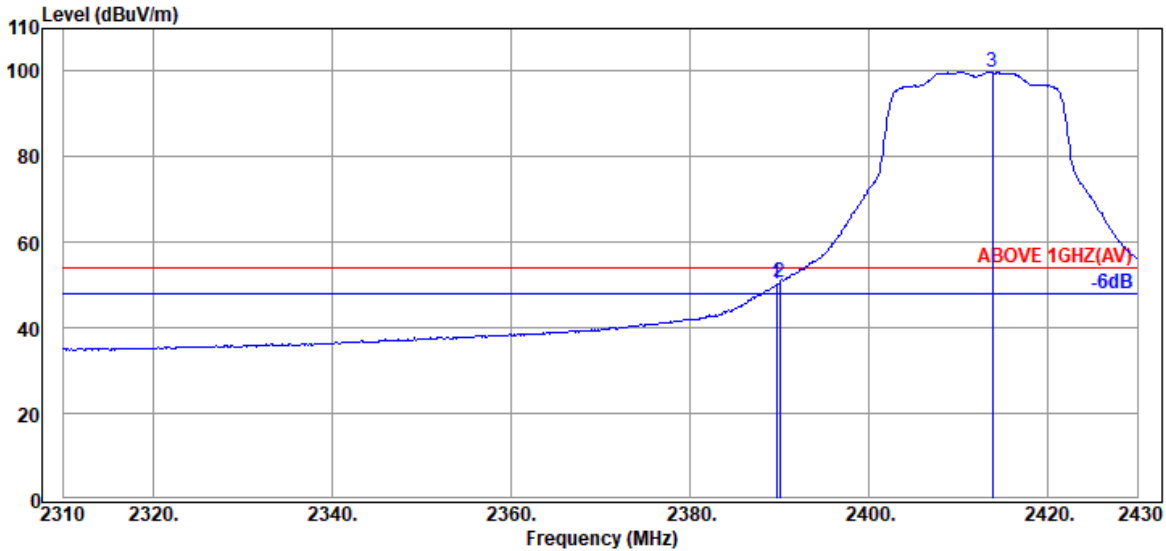


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	56.11	50.11	54.00	3.89	Average
2390.040	28.21	5.72	39.93	56.70	50.70	54.00	3.30	Average
@ 2413.800	28.19	5.76	39.93	105.89	99.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

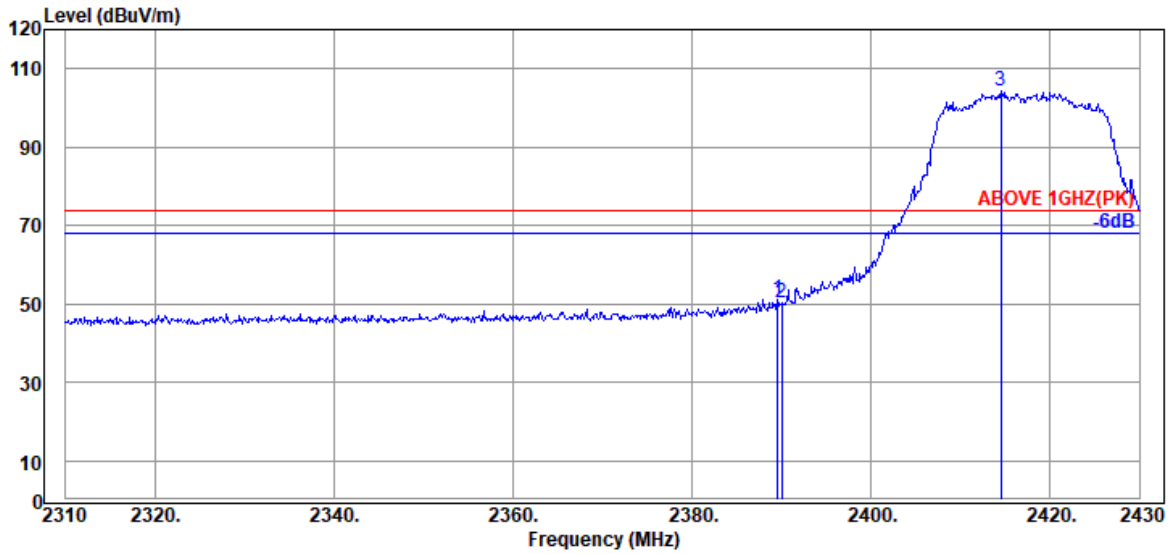

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	57.17	51.17	74.00	22.83	Peak
2390.040	28.21	5.72	39.93	56.41	50.41	74.00	23.59	Peak
@ 2414.520	28.19	5.76	39.93	110.45	104.47	---	---	Peak

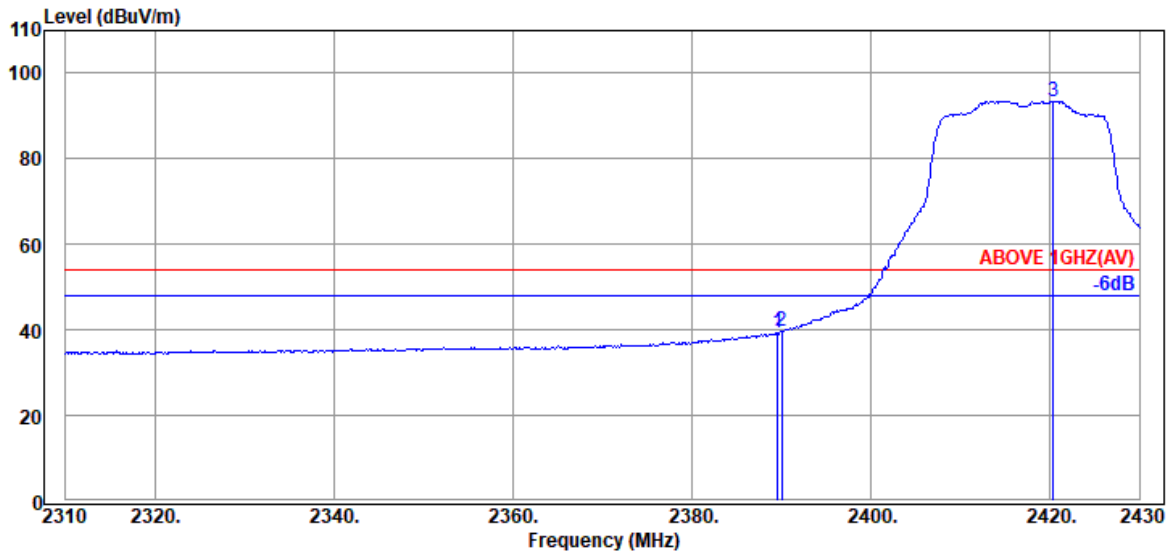


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	45.21	39.21	54.00	14.79	Average
2390.040	28.21	5.72	39.93	45.58	39.58	54.00	14.42	Average
@ 2420.400	28.23	5.77	39.93	99.32	93.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

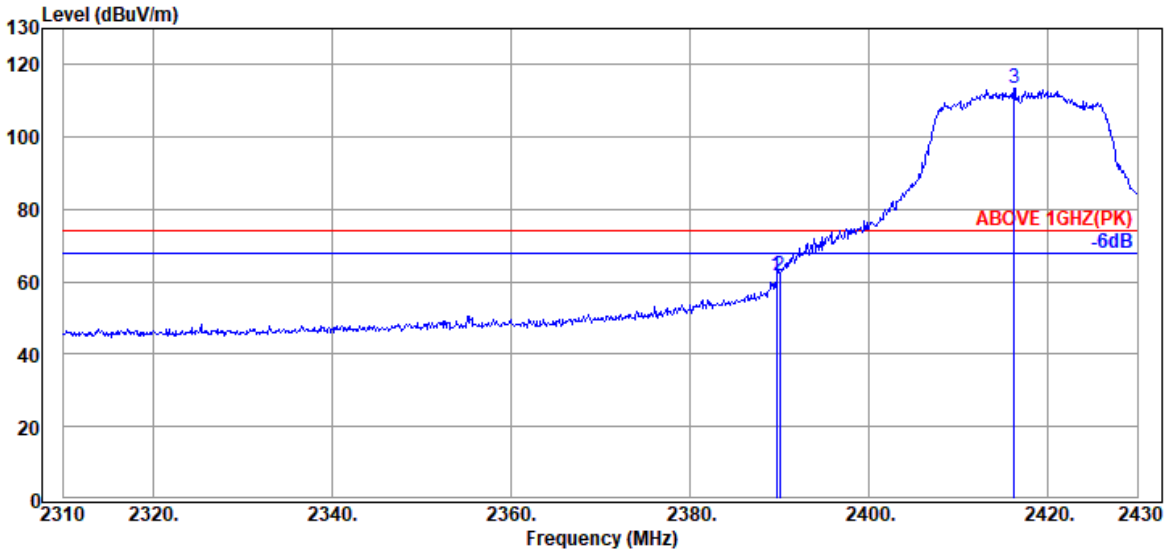

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	67.59	61.59	74.00	12.41	Peak
2390.040	28.21	5.72	39.93	67.54	61.54	74.00	12.46	Peak
@ 2416.200	28.19	5.76	39.93	119.57	113.59	---	---	Peak

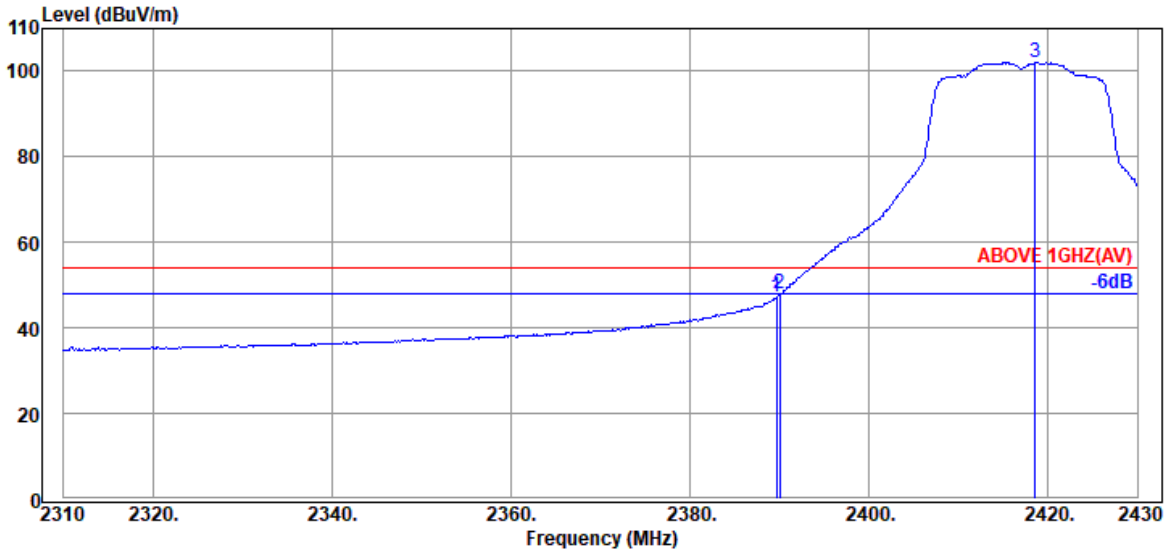


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	53.17	47.17	54.00	6.83	Average
2390.040	28.21	5.72	39.93	53.84	47.84	54.00	6.16	Average
@ 2418.600	28.23	5.77	39.93	108.00	102.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

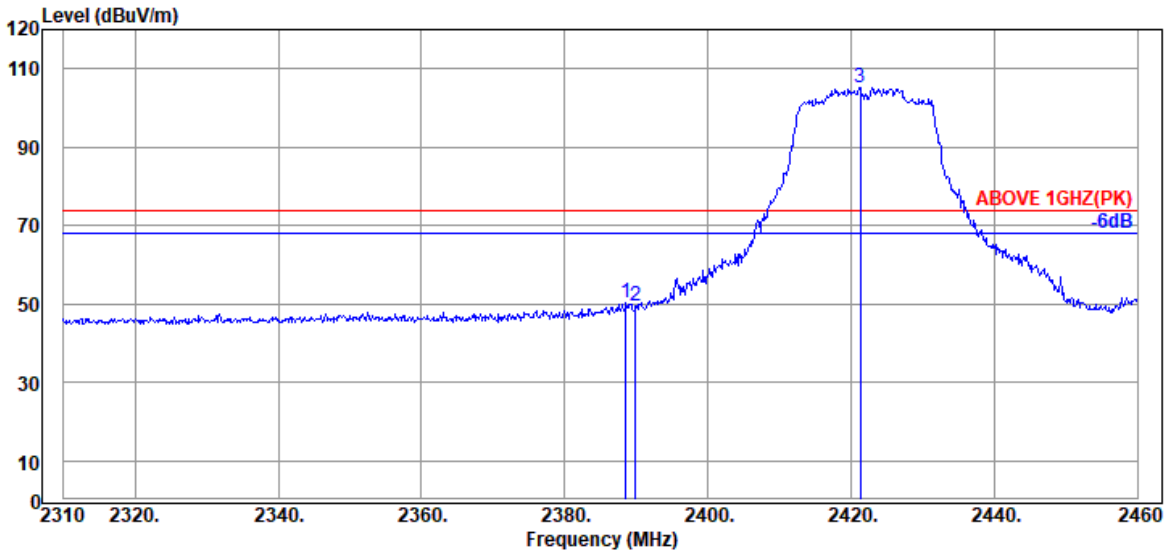

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.21	5.72	39.93	56.19	50.19	74.00	23.81	Peak
2389.950	28.21	5.72	39.93	55.64	49.64	74.00	24.36	Peak
@ 2421.300	28.23	5.77	39.93	111.10	105.17	---	---	Peak

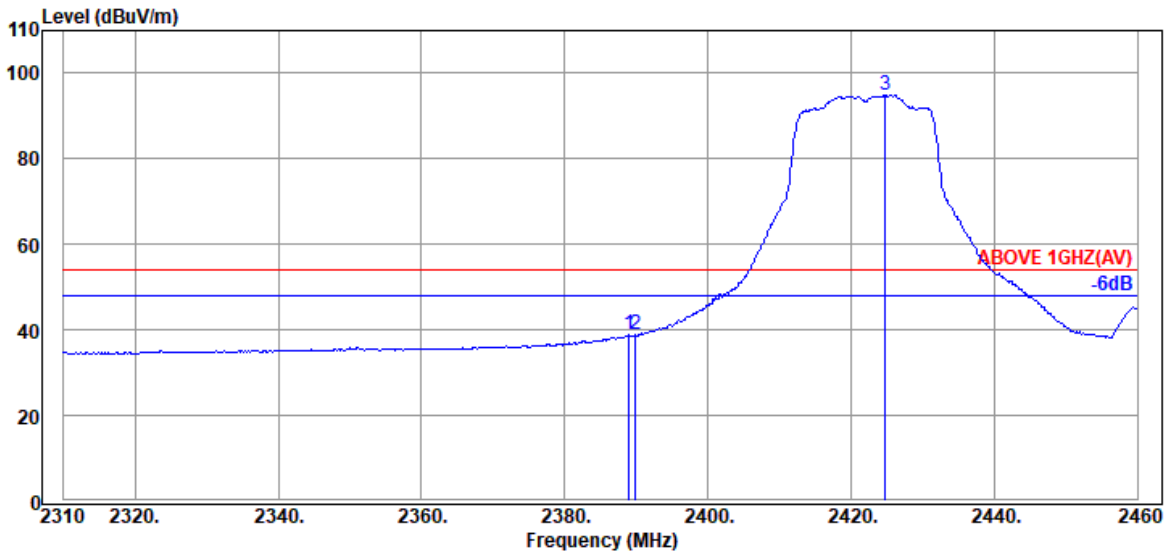


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.21	5.72	39.93	44.76	38.76	54.00	15.24	Average
2389.950	28.21	5.72	39.93	44.78	38.78	54.00	15.22	Average
@ 2424.750	28.23	5.77	39.93	100.90	94.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

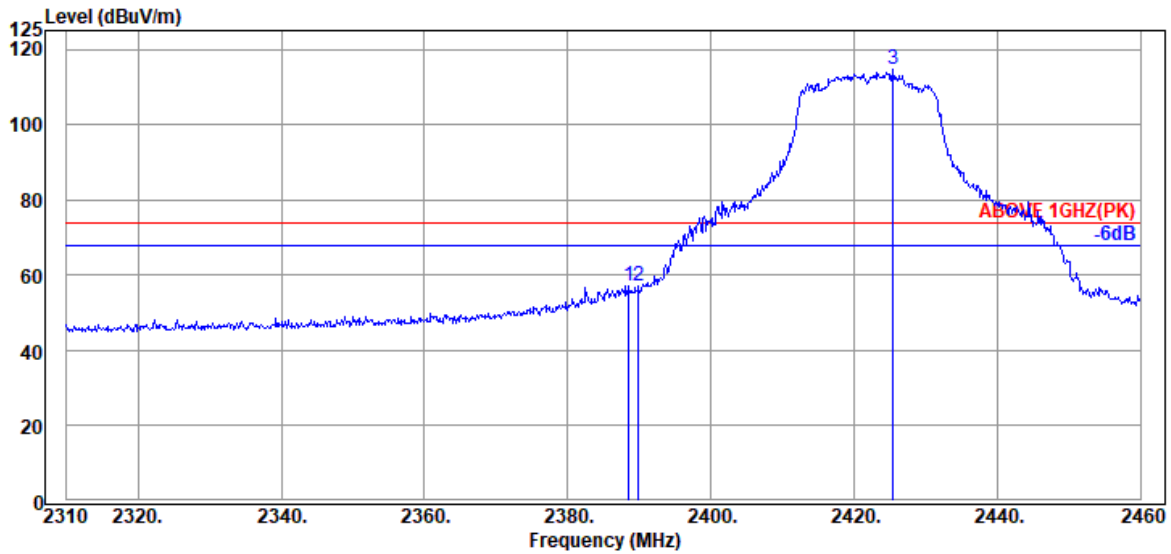

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.21	5.72	39.93	63.19	57.19	74.00	16.81	Peak
2389.950	28.21	5.72	39.93	63.00	57.00	74.00	17.00	Peak
@ 2425.500	28.27	5.78	39.93	120.41	114.53	---	---	Peak

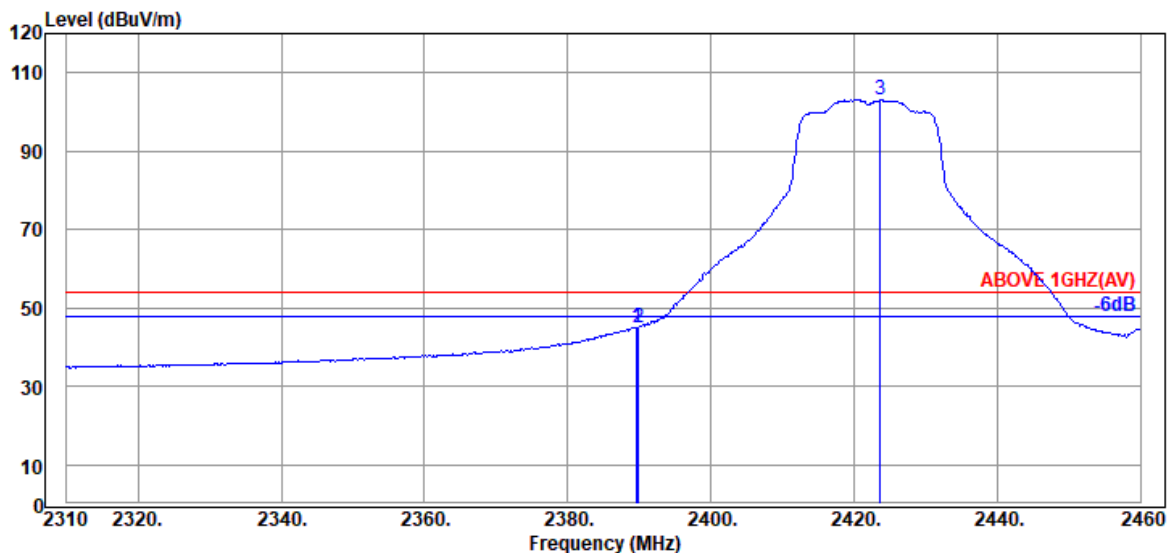


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.21	5.72	39.93	51.03	45.03	54.00	8.97	Average
2389.950	28.21	5.72	39.93	50.99	44.99	54.00	9.01	Average
@ 2423.700	28.23	5.77	39.93	109.16	103.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

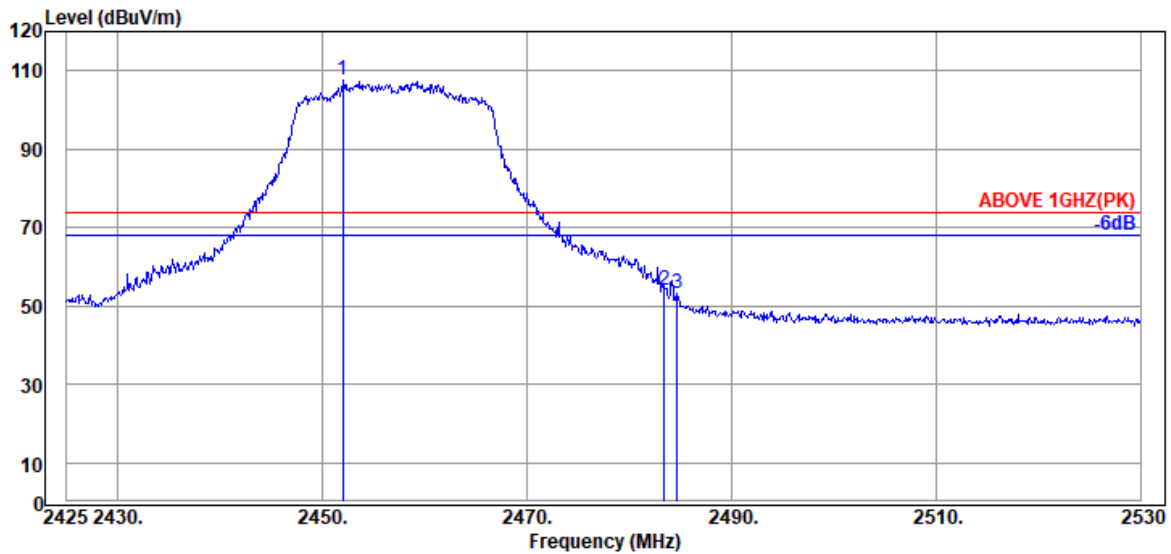

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.985	28.40	5.81	39.92	113.47	107.76	---	---	Peak
2483.485	28.47	5.87	39.92	59.44	53.86	74.00	20.14	Peak
2484.745	28.47	5.87	39.92	58.61	53.03	74.00	20.97	Peak

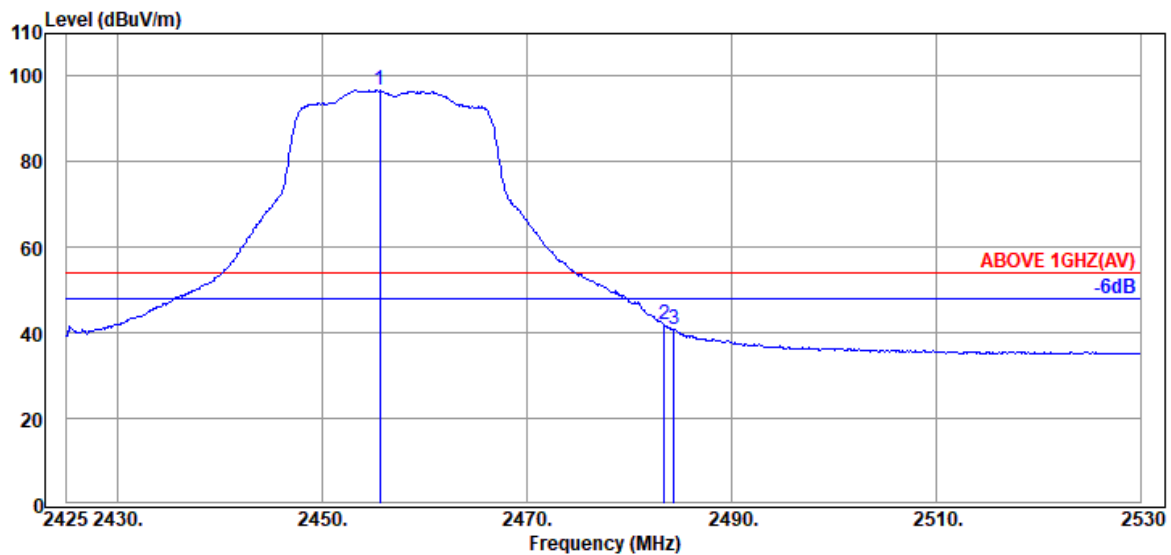


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.660	28.41	5.83	39.92	102.34	96.66	---	---	Average
2483.485	28.47	5.87	39.92	47.36	41.78	54.00	12.22	Average
2484.430	28.47	5.87	39.92	46.30	40.72	54.00	13.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

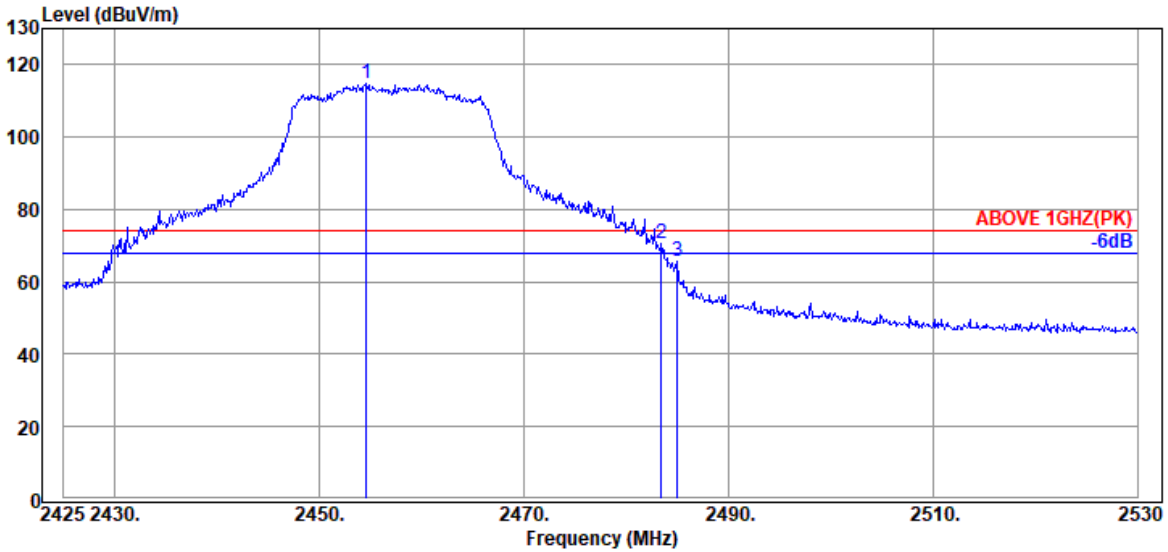

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.610	28.41	5.83	39.92	120.42	114.74	---	---	Peak
2483.485	28.47	5.87	39.92	76.03	70.45	74.00	3.55	Peak
2485.060	28.47	5.87	39.92	71.04	65.46	74.00	8.54	Peak

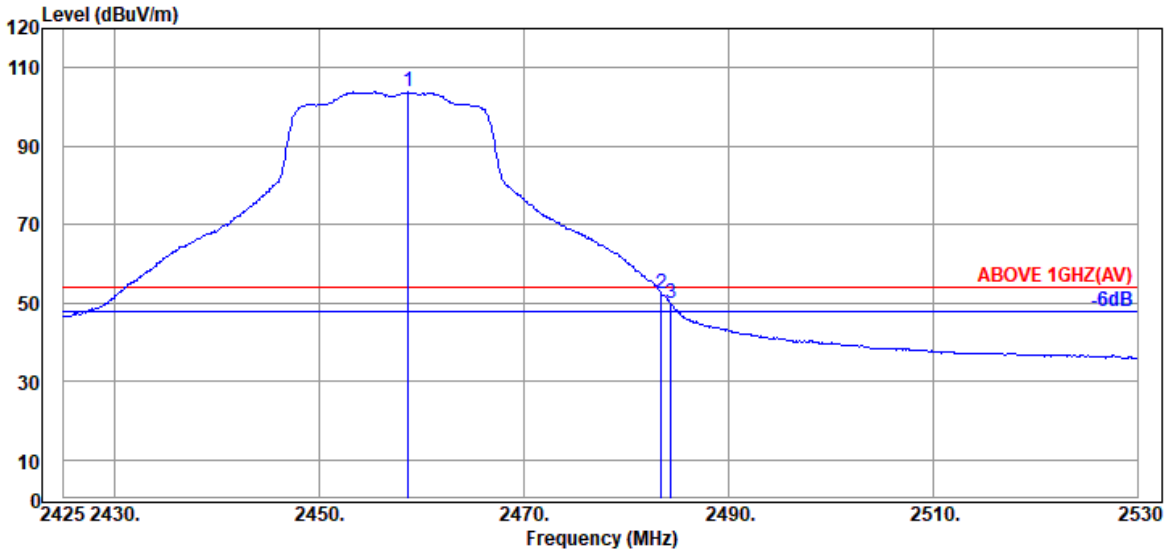


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.705	28.41	5.83	39.92	109.44	103.76	---	---	Average
2483.485	28.47	5.87	39.92	58.05	52.47	54.00	1.53	Average
2484.430	28.47	5.87	39.92	55.43	49.85	54.00	4.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

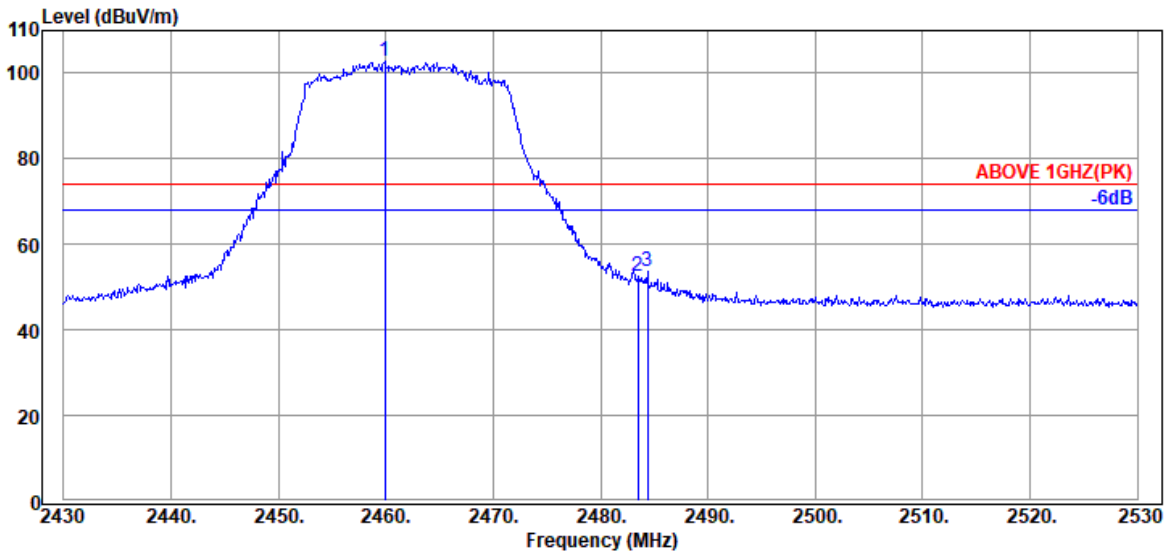

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.900	28.41	5.83	39.92	108.49	102.81	---	---	Peak
2483.500	28.47	5.87	39.92	57.97	52.39	74.00	21.61	Peak
2484.400	28.47	5.87	39.92	59.23	53.65	74.00	20.35	Peak

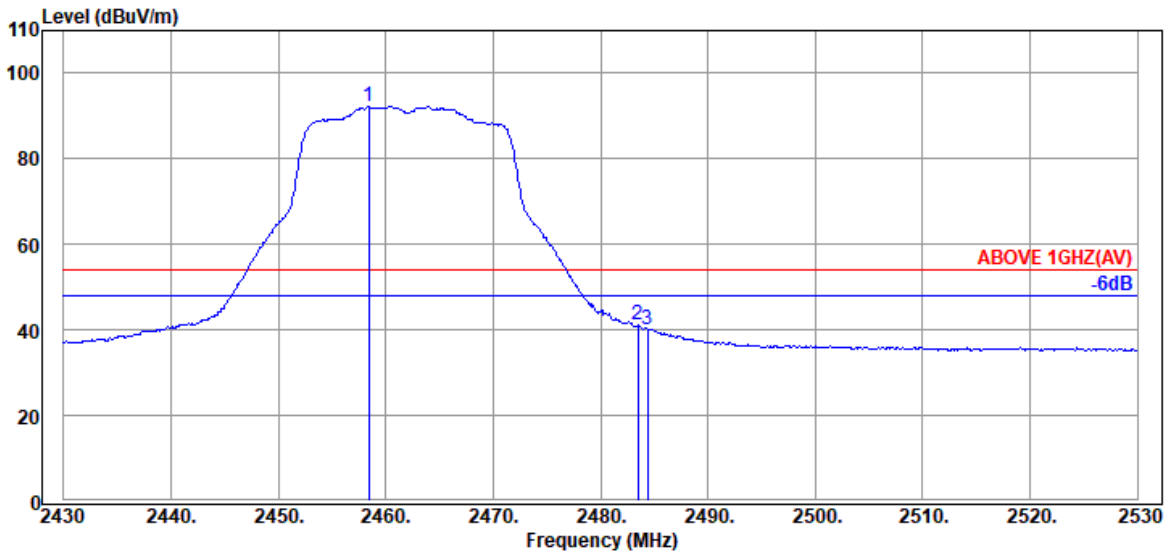


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.400	28.41	5.83	39.92	97.83	92.15	---	---	Average
2483.500	28.47	5.87	39.92	46.59	41.01	54.00	12.99	Average
2484.400	28.47	5.87	39.92	45.72	40.14	54.00	13.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

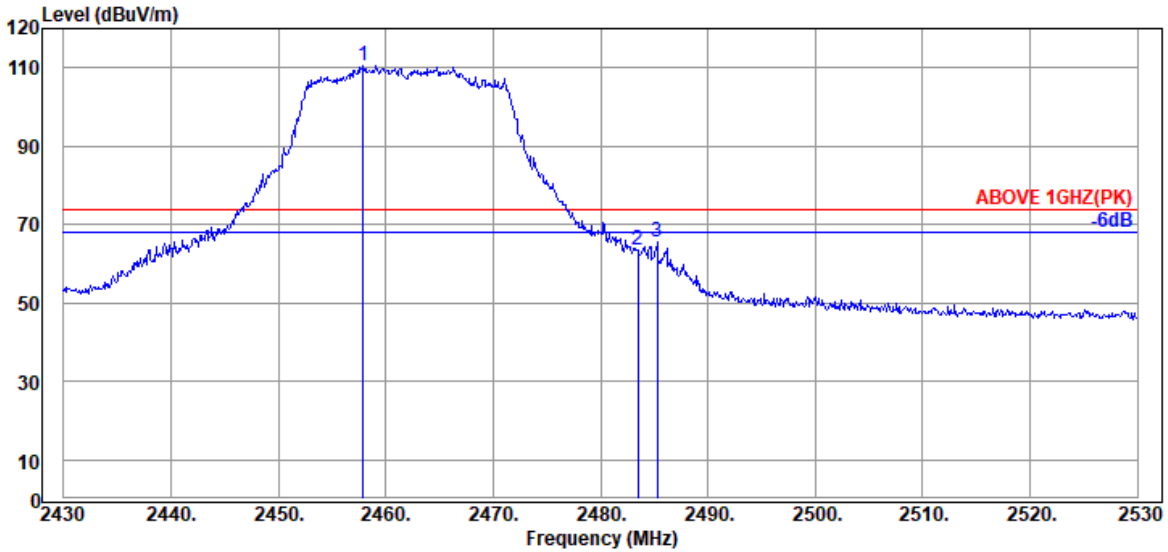

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.900	28.41	5.83	39.92	116.17	110.49	---	---	Peak
2483.500	28.47	5.87	39.92	69.18	63.60	74.00	10.40	Peak
2485.300	28.47	5.87	39.92	71.24	65.66	74.00	8.34	Peak

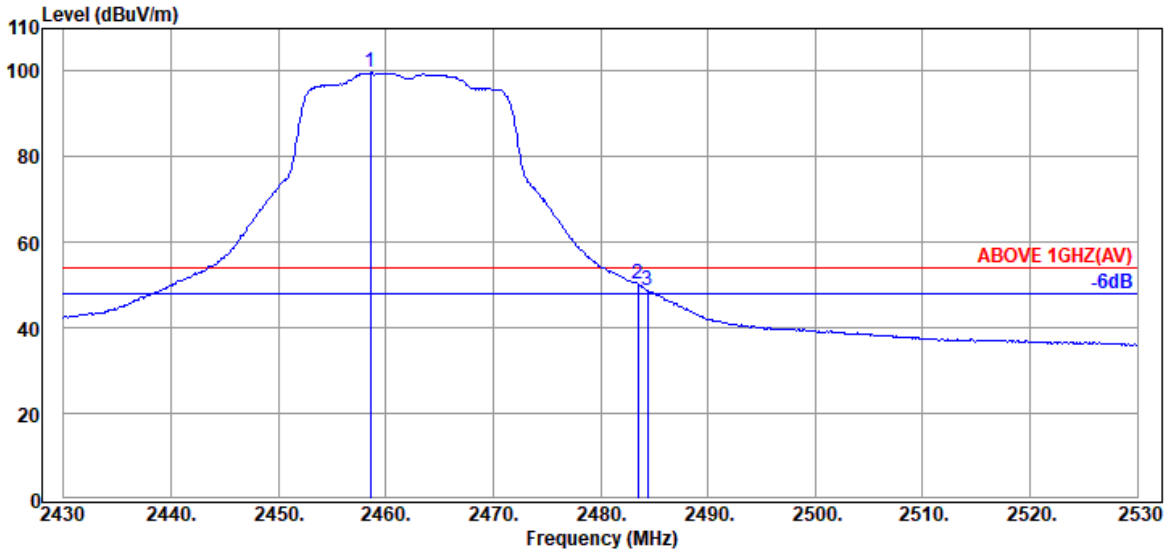


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.600	28.41	5.83	39.92	105.33	99.65	---	---	Average
2483.500	28.47	5.87	39.92	55.74	50.16	54.00	3.84	Average
2484.400	28.47	5.87	39.92	54.20	48.62	54.00	5.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

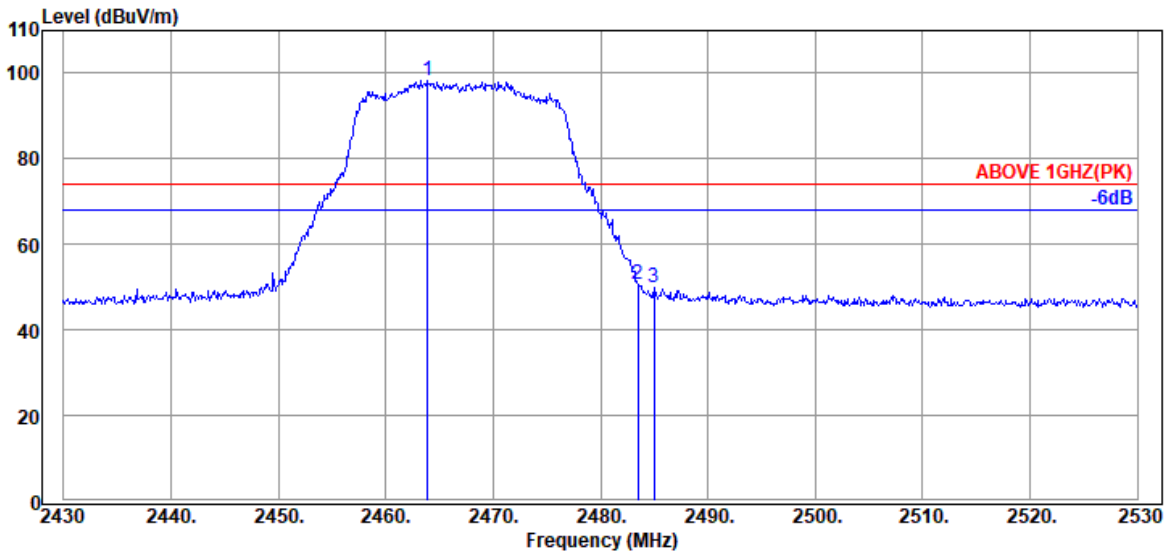

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	28.43	5.84	39.92	103.89	98.24	---	---	Peak
2483.500	28.47	5.87	39.92	56.22	50.64	74.00	23.36	Peak
2485.000	28.47	5.87	39.92	55.31	49.73	74.00	24.27	Peak

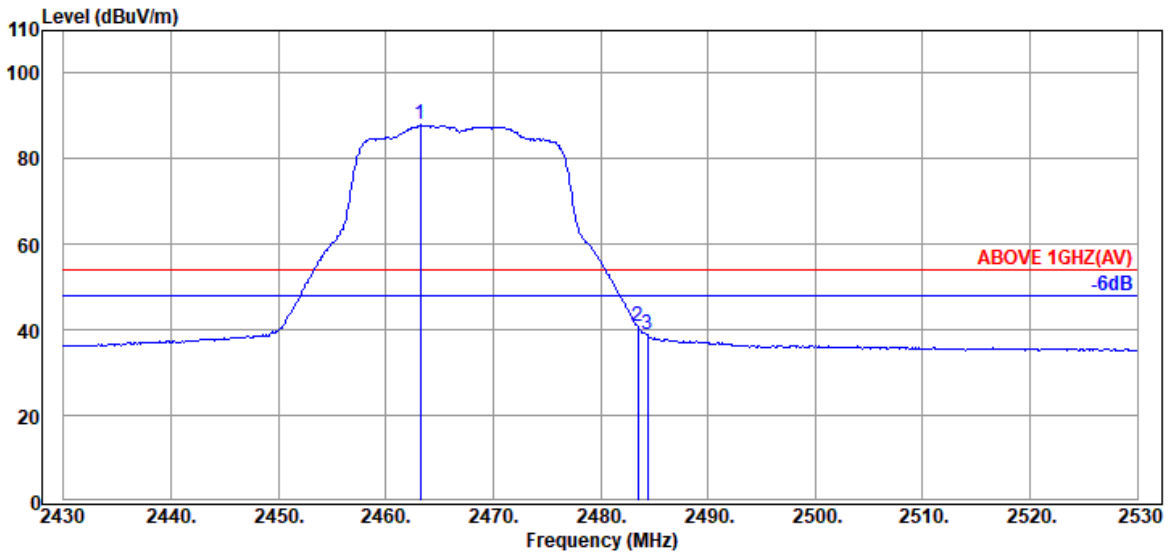


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.200	28.43	5.84	39.92	93.54	87.89	---	---	Average
2483.500	28.47	5.87	39.92	46.31	40.73	54.00	13.27	Average
2484.400	28.47	5.87	39.92	44.38	38.80	54.00	15.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

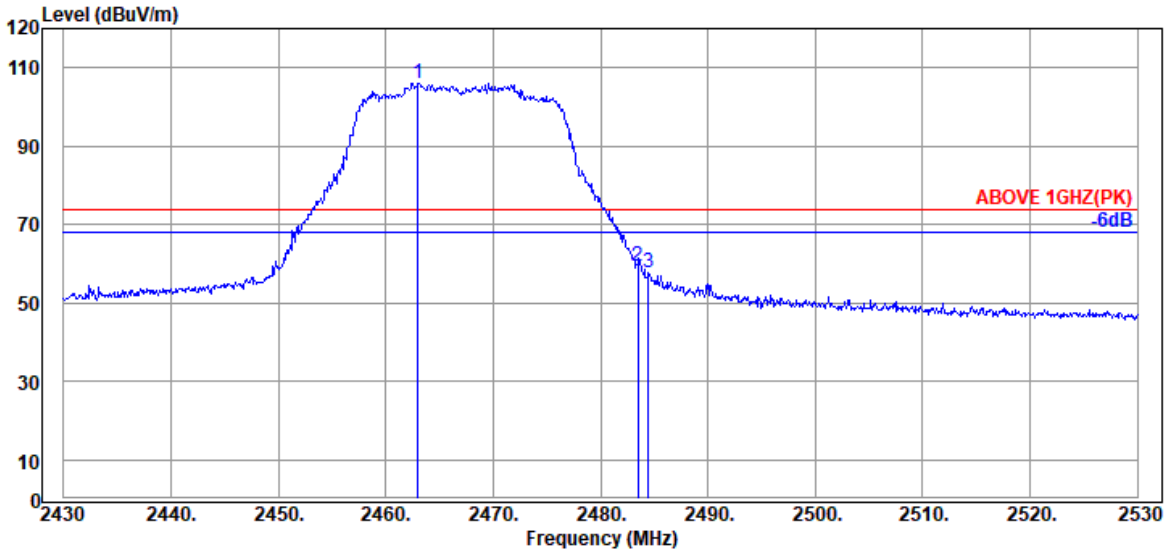

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	28.43	5.84	39.92	111.78	106.13	---	---	Peak
2483.500	28.47	5.87	39.92	64.94	59.36	74.00	14.64	Peak
2484.500	28.47	5.87	39.92	63.31	57.73	74.00	16.27	Peak

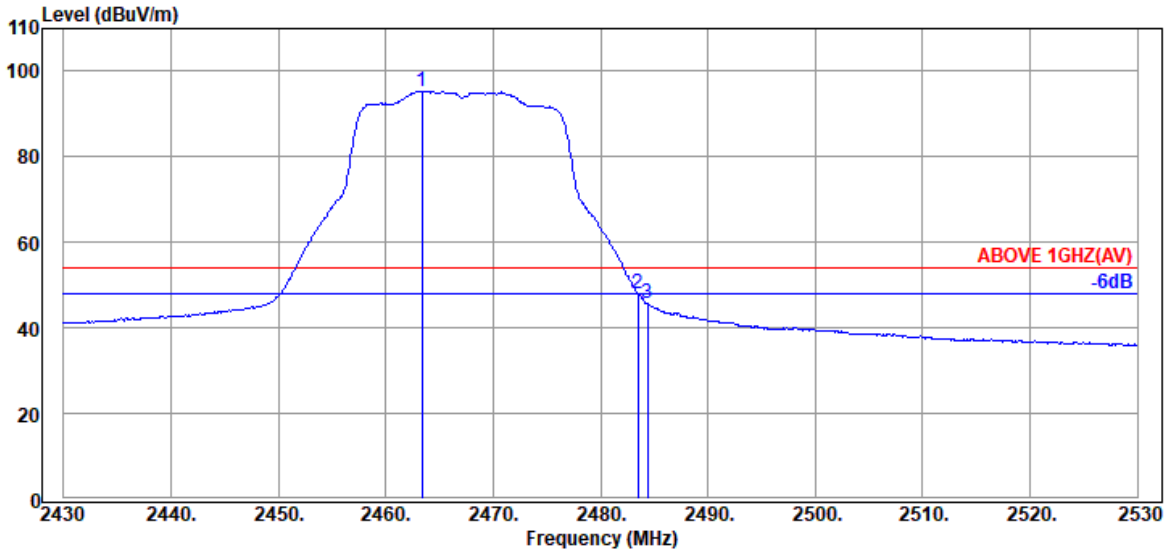


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.43	5.84	39.92	101.06	95.41	---	---	Average
2483.500	28.47	5.87	39.92	53.74	48.16	54.00	5.84	Average
2484.400	28.47	5.87	39.92	51.14	45.56	54.00	8.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

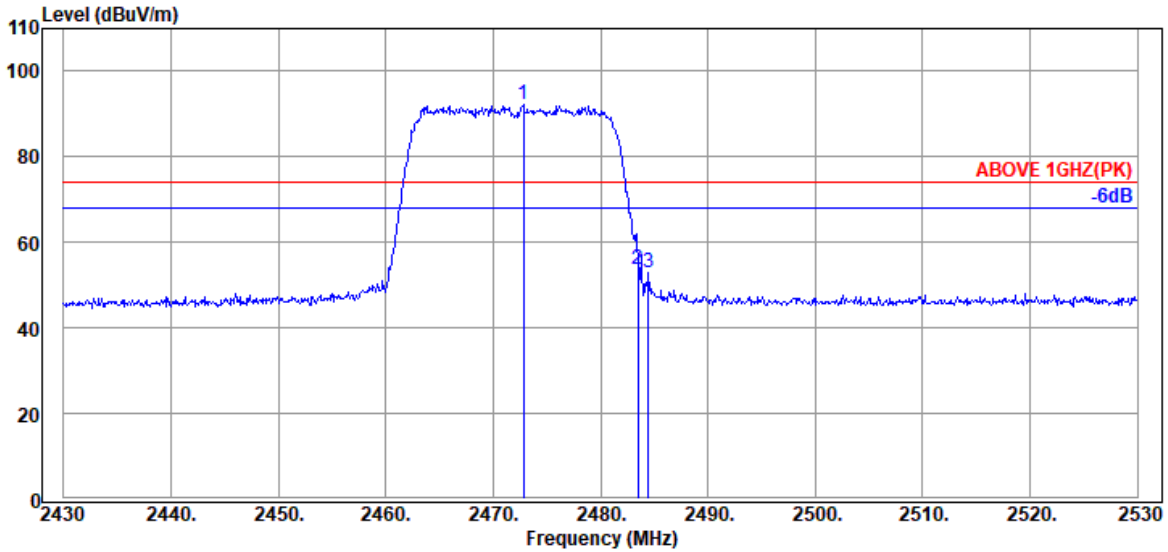

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.800	28.44	5.85	39.92	97.97	92.34	---	---	Peak
2483.500	28.47	5.87	39.92	59.39	53.81	74.00	20.19	Peak
2484.500	28.47	5.87	39.92	58.48	52.90	74.00	21.10	Peak

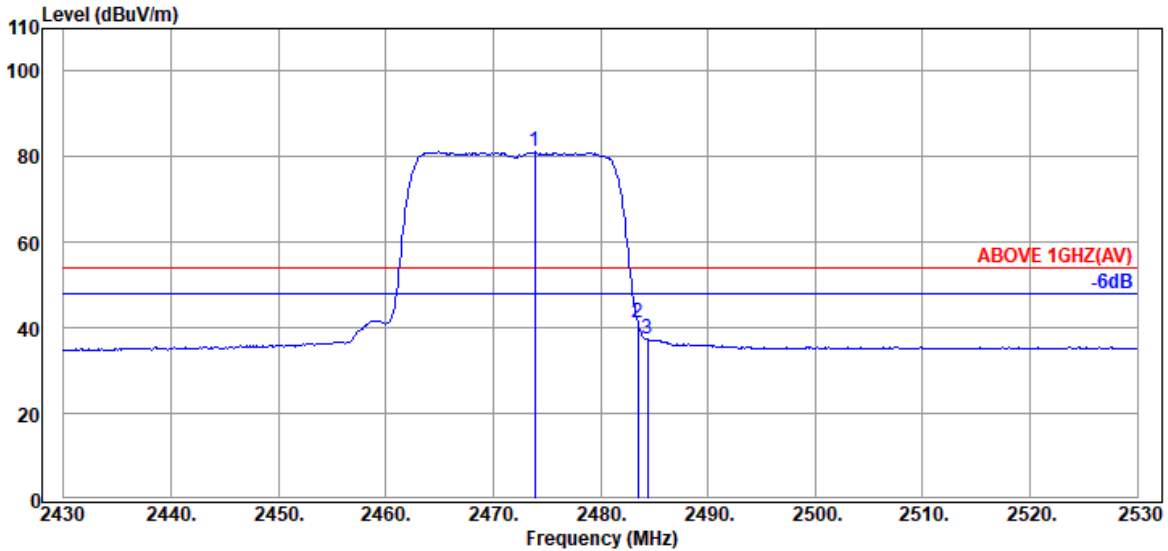


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.900	28.44	5.85	39.92	86.79	81.16	---	---	Average
2483.500	28.47	5.87	39.92	46.92	41.34	54.00	12.66	Average
2484.400	28.47	5.87	39.92	42.98	37.40	54.00	16.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

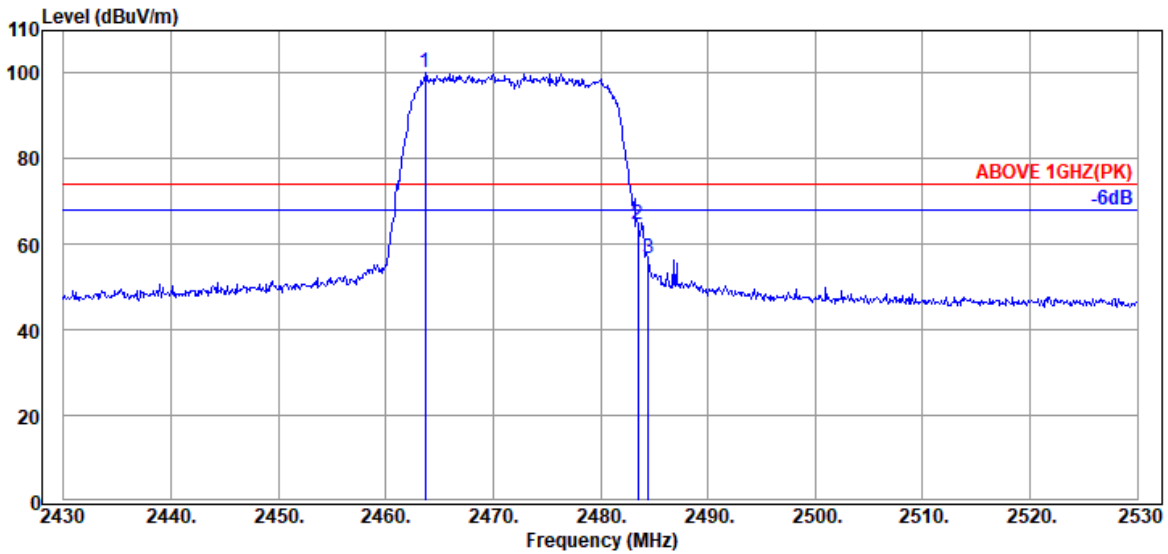

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.700	28.43	5.84	39.92	105.65	100.00	---	---	Peak
2483.500	28.47	5.87	39.92	70.13	64.55	74.00	9.45	Peak
2484.500	28.47	5.87	39.92	62.44	56.86	74.00	17.14	Peak

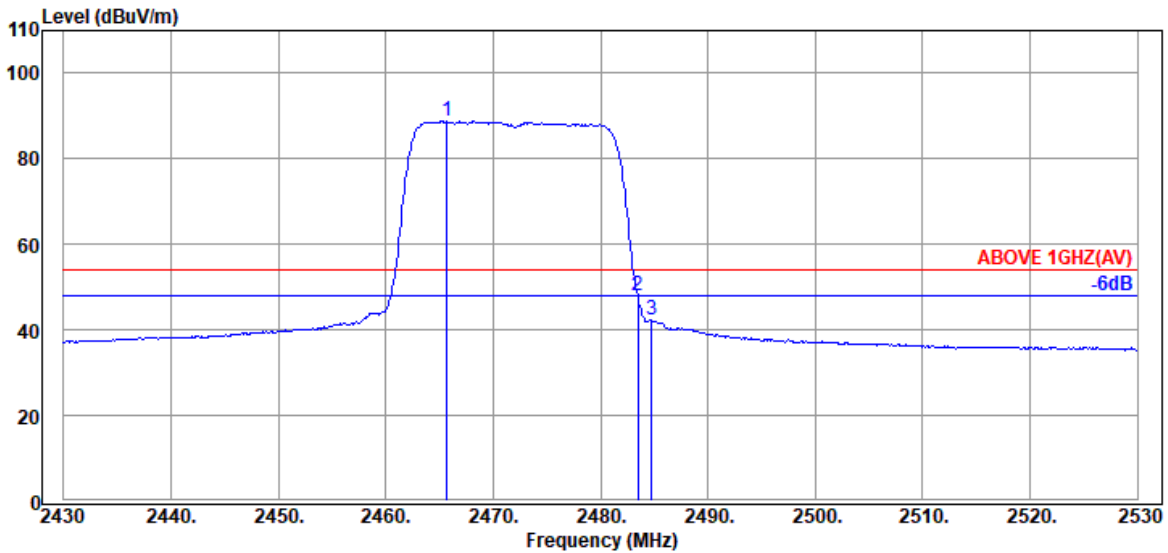


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.700	28.43	5.84	39.92	94.46	88.81	---	---	Average
2483.500	28.47	5.87	39.92	53.53	47.95	54.00	6.05	Average
2484.800	28.47	5.87	39.92	47.79	42.21	54.00	11.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

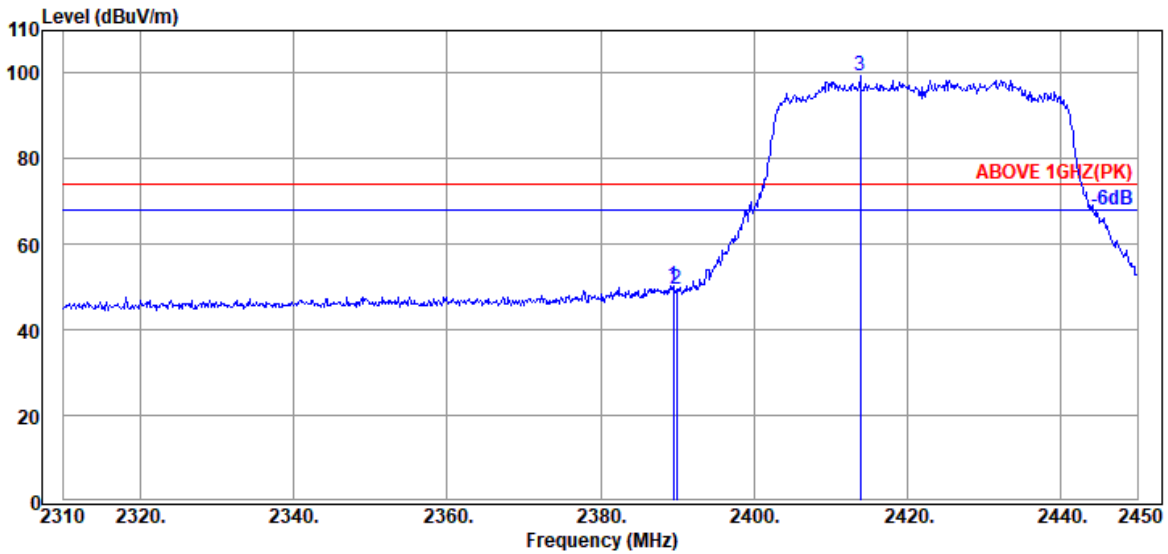

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.21	5.72	39.93	56.39	50.39	74.00	23.61	Peak
2389.940	28.21	5.72	39.93	55.49	49.49	74.00	24.51	Peak
@ 2413.880	28.19	5.76	39.93	105.24	99.26	---	---	Peak

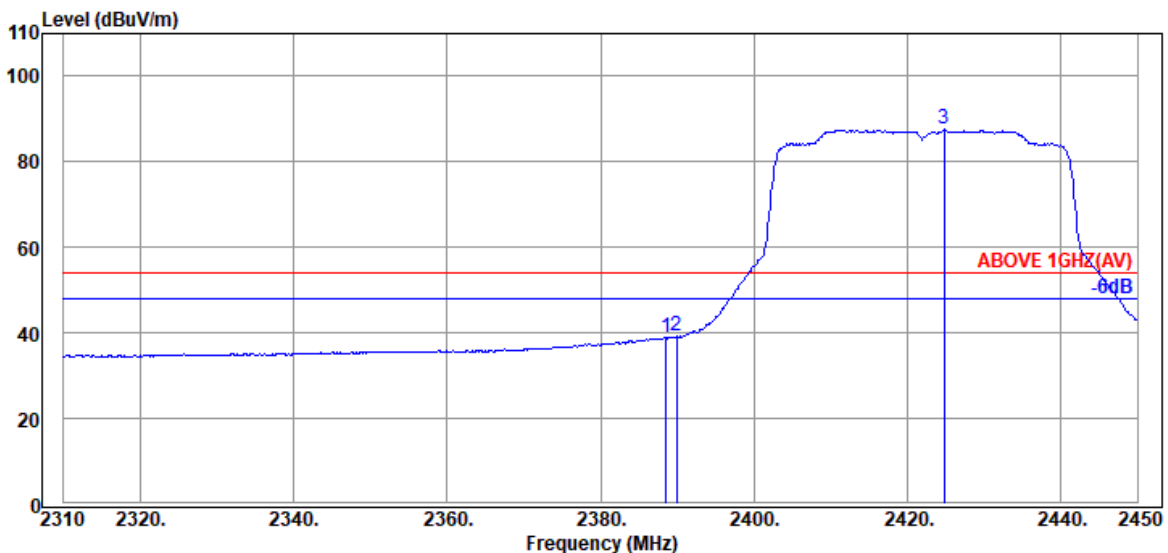


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.540	28.21	5.72	39.93	44.89	38.89	54.00	15.11	Average
2389.940	28.21	5.72	39.93	45.16	39.16	54.00	14.84	Average
@ 2424.800	28.23	5.77	39.93	93.49	87.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

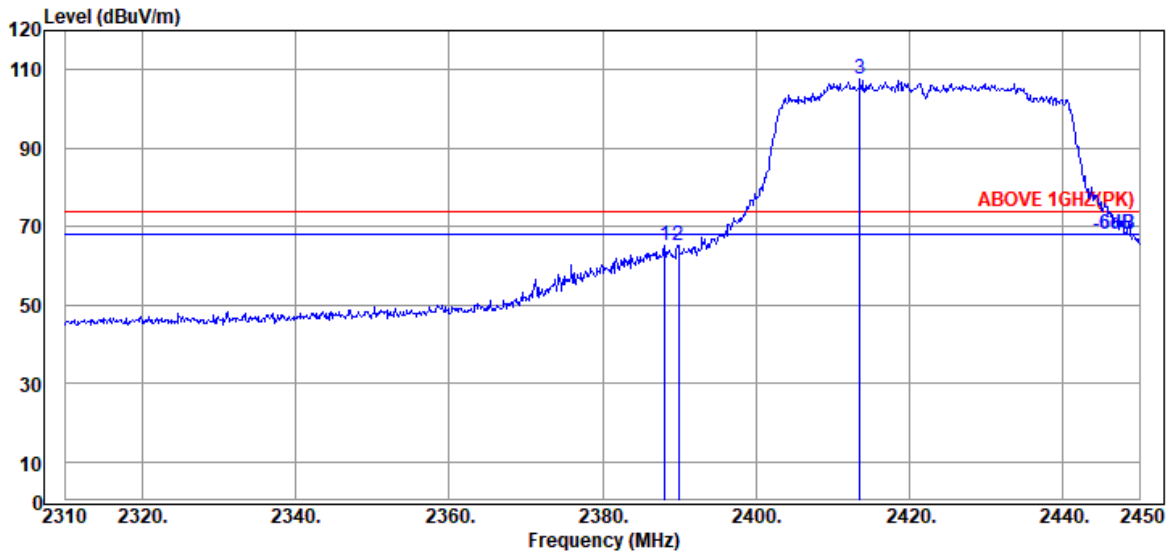

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	28.21	5.72	39.93	71.32	65.32	74.00	8.68	Peak
2389.940	28.21	5.72	39.93	71.18	65.18	74.00	8.82	Peak
@ 2413.600	28.19	5.76	39.93	113.59	107.61	---	---	Peak

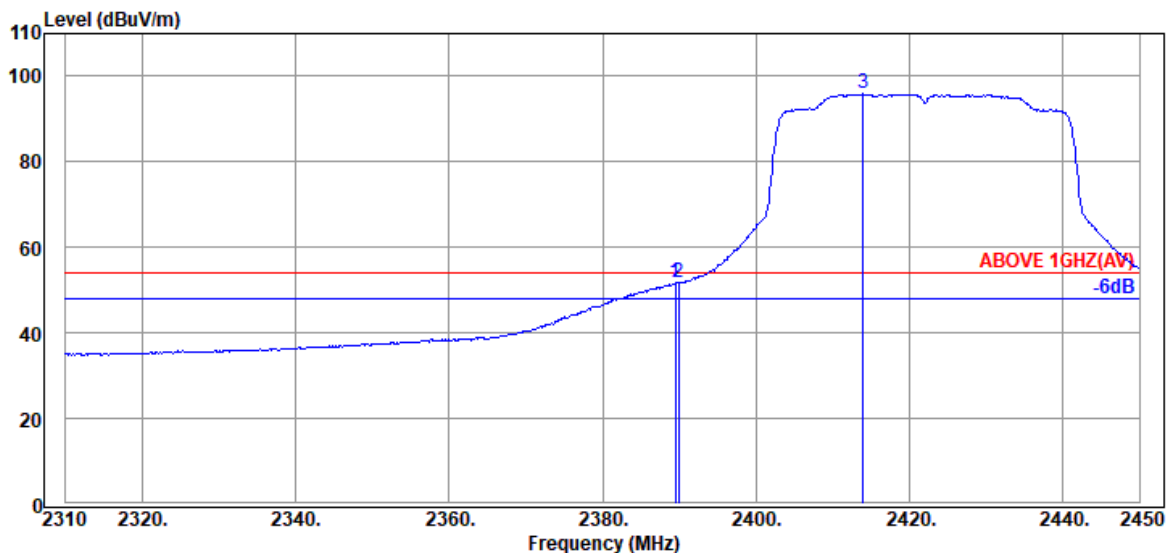


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.520	28.21	5.72	39.93	57.63	51.63	54.00	2.37	Average
2389.940	28.21	5.72	39.93	57.60	51.60	54.00	2.40	Average
@ 2414.020	28.19	5.76	39.93	101.81	95.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

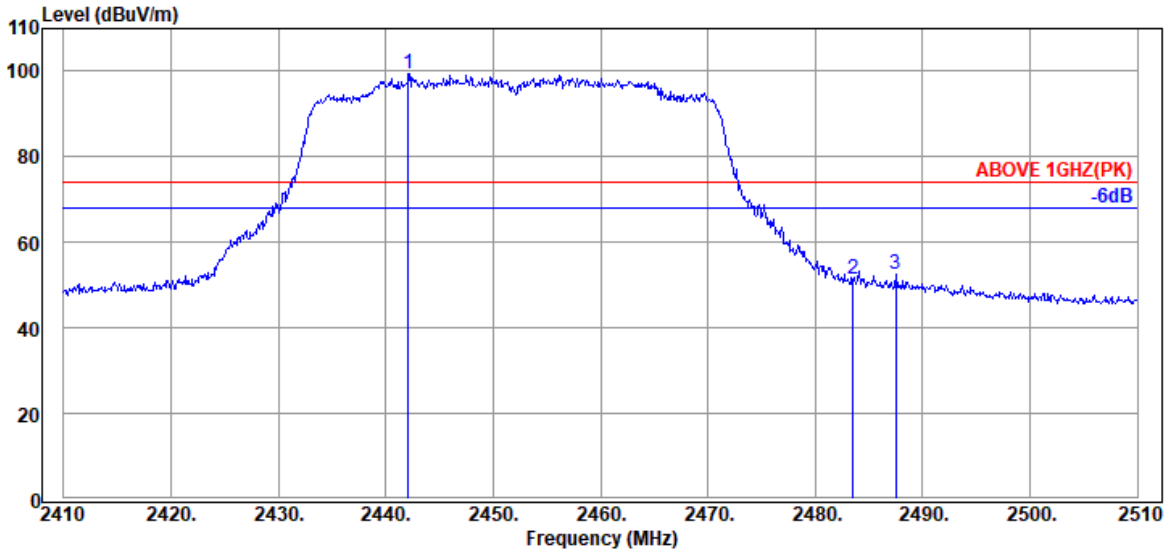

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.100	28.36	5.80	39.93	105.19	99.42	---	---	Peak
2483.500	28.47	5.87	39.92	57.02	51.44	74.00	22.56	Peak
2487.500	28.47	5.87	39.92	58.17	52.59	74.00	21.41	Peak

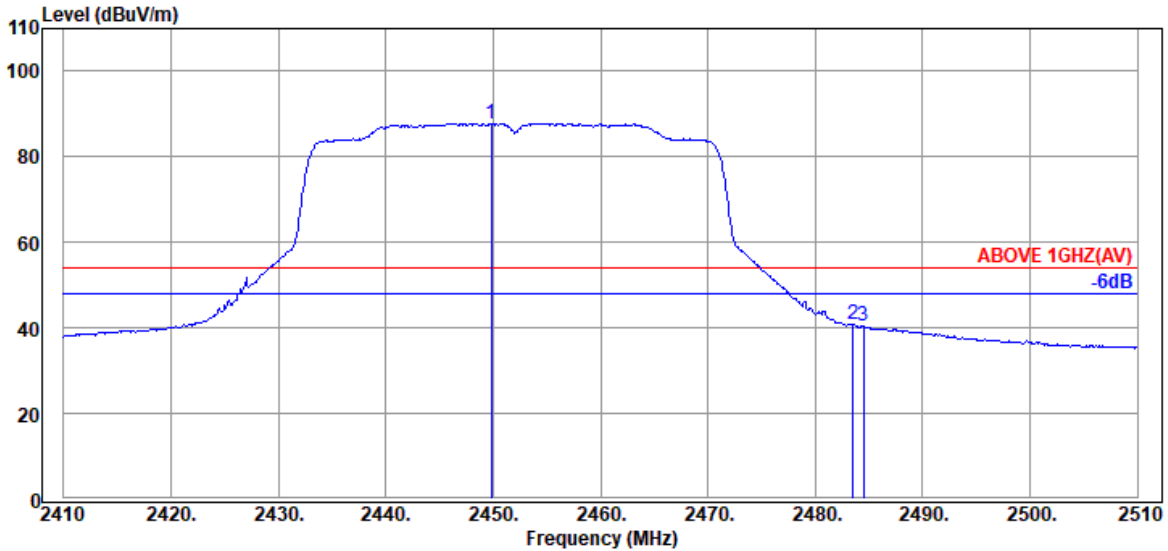


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.800	28.40	5.81	39.93	93.59	87.87	---	---	Average
2483.500	28.47	5.87	39.92	46.39	40.81	54.00	13.19	Average
2484.500	28.47	5.87	39.92	45.94	40.36	54.00	13.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

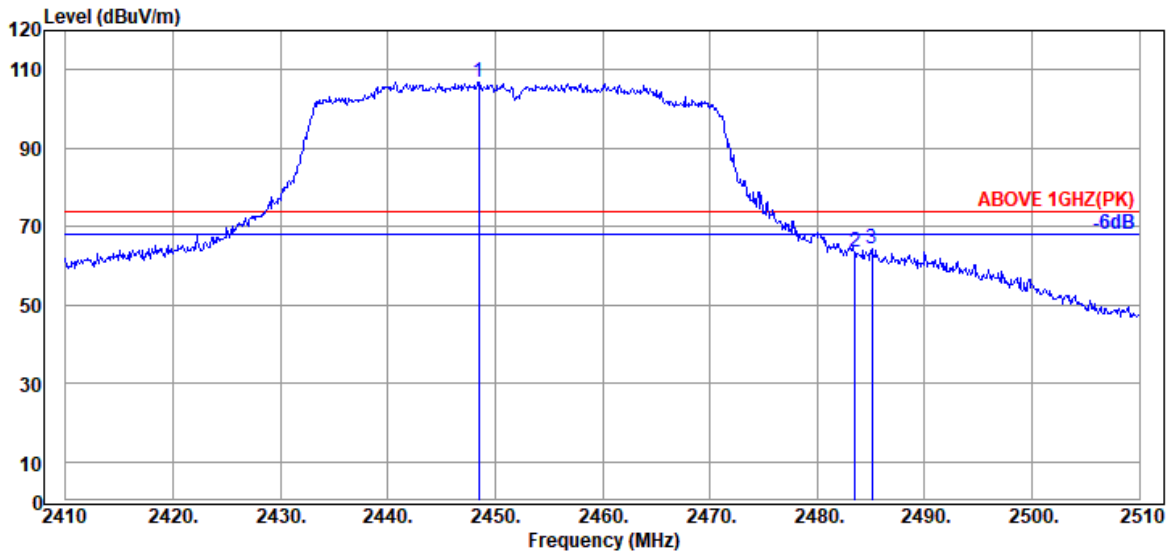

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.500	28.40	5.81	39.93	112.63	106.91	---	---	Peak
2483.500	28.47	5.87	39.92	69.07	63.49	74.00	10.51	Peak
2485.100	28.47	5.87	39.92	69.74	64.16	74.00	9.84	Peak

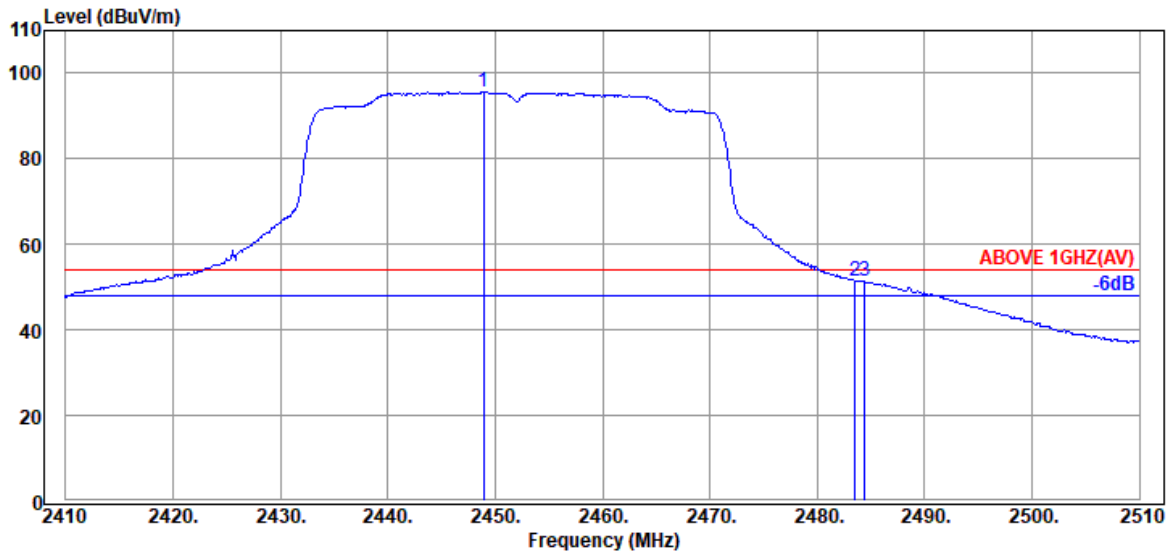


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.900	28.40	5.81	39.93	101.35	95.63	---	---	Average
2483.500	28.47	5.87	39.92	57.10	51.52	54.00	2.48	Average
2484.400	28.47	5.87	39.92	56.94	51.36	54.00	2.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

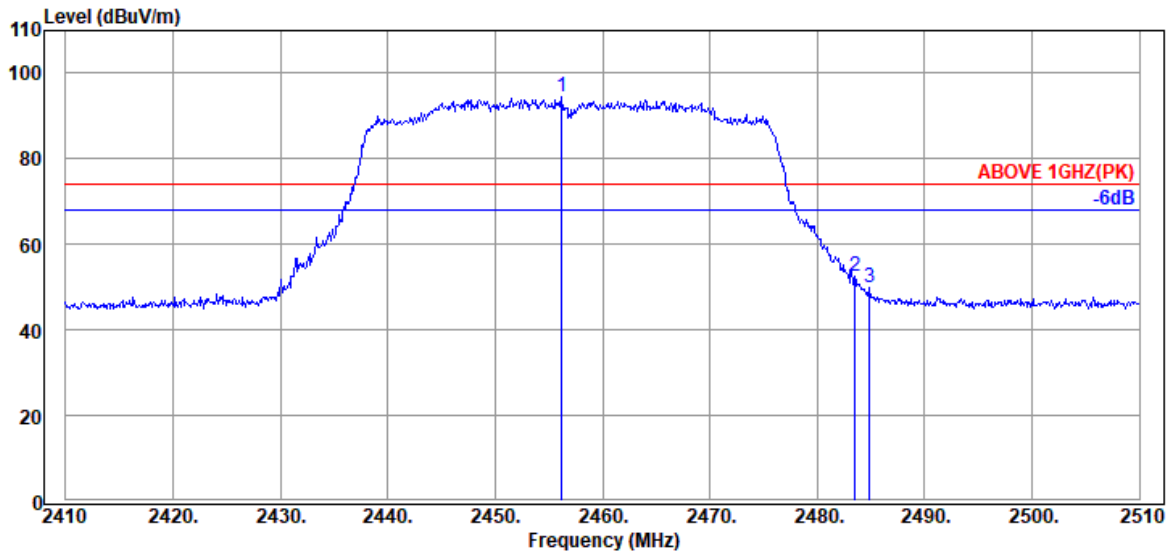

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.200	28.41	5.83	39.92	100.29	94.61	---	---	Peak
2483.500	28.47	5.87	39.92	58.11	52.53	74.00	21.47	Peak
2484.900	28.47	5.87	39.92	55.48	49.90	74.00	24.10	Peak

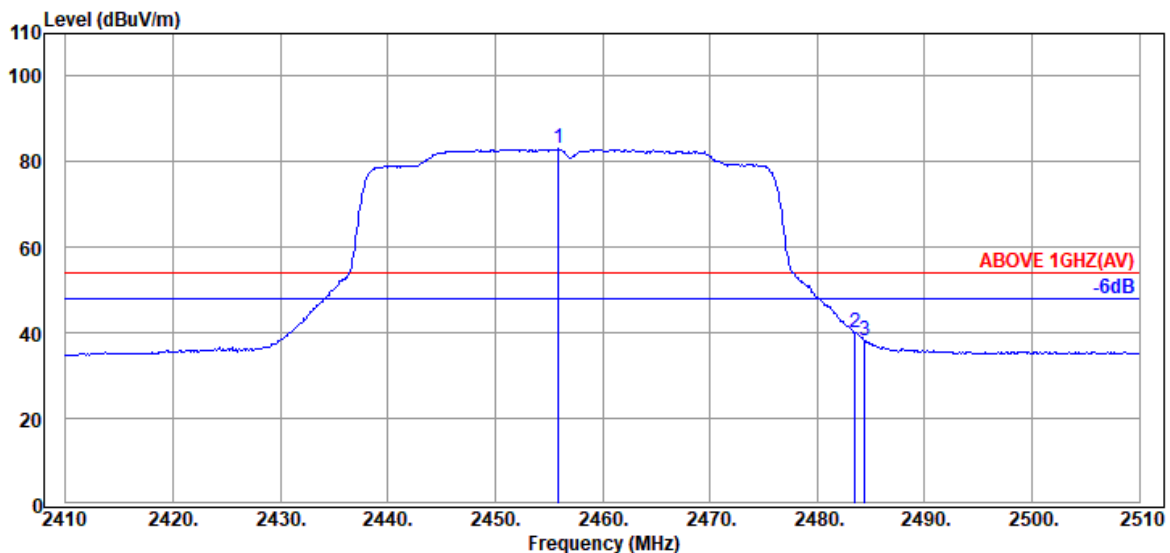


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.900	28.41	5.83	39.92	88.87	83.19	---	---	Average
2483.500	28.47	5.87	39.92	45.56	39.98	54.00	14.02	Average
2484.400	28.47	5.87	39.92	43.72	38.14	54.00	15.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

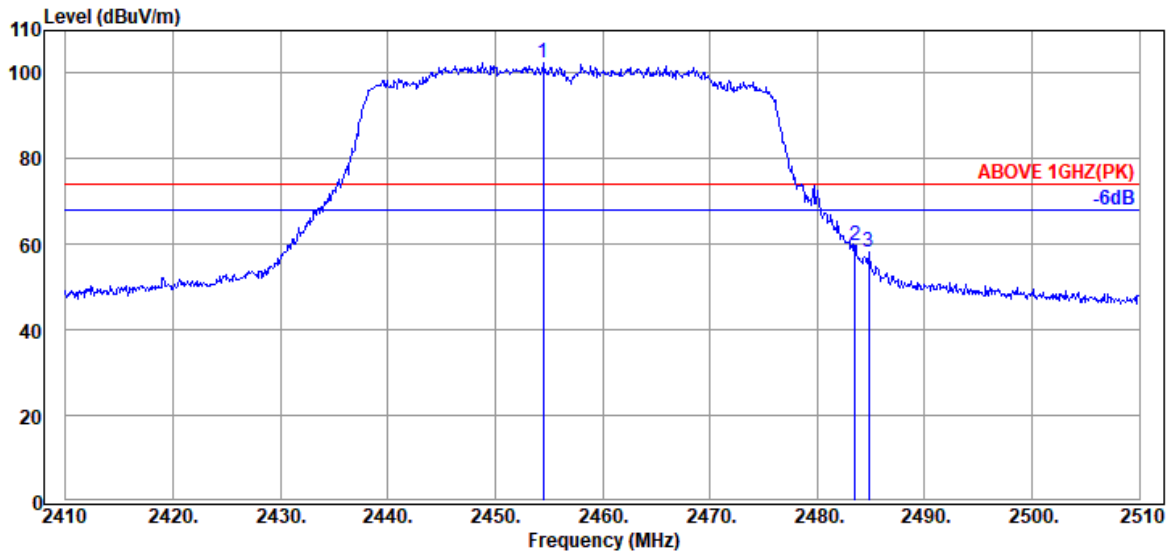

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	28.41	5.83	39.92	108.14	102.46	---	---	Peak
2483.500	28.47	5.87	39.92	65.38	59.80	74.00	14.20	Peak
2484.800	28.47	5.87	39.92	63.64	58.06	74.00	15.94	Peak

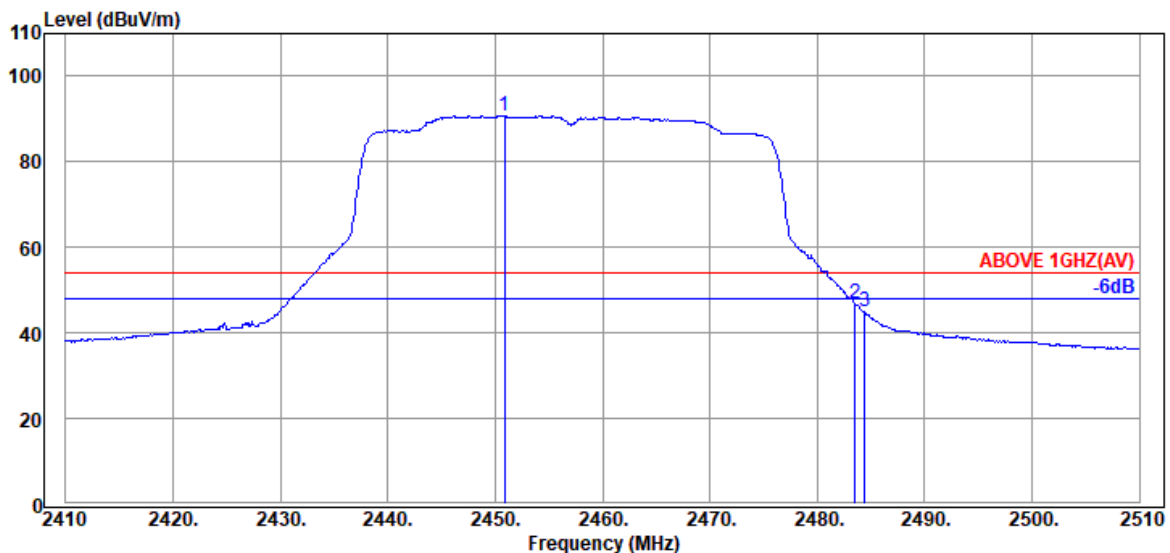


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.900	28.40	5.81	39.92	96.47	90.76	---	---	Average
2483.500	28.47	5.87	39.92	52.40	46.82	54.00	7.18	Average
2484.400	28.47	5.87	39.92	50.49	44.91	54.00	9.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

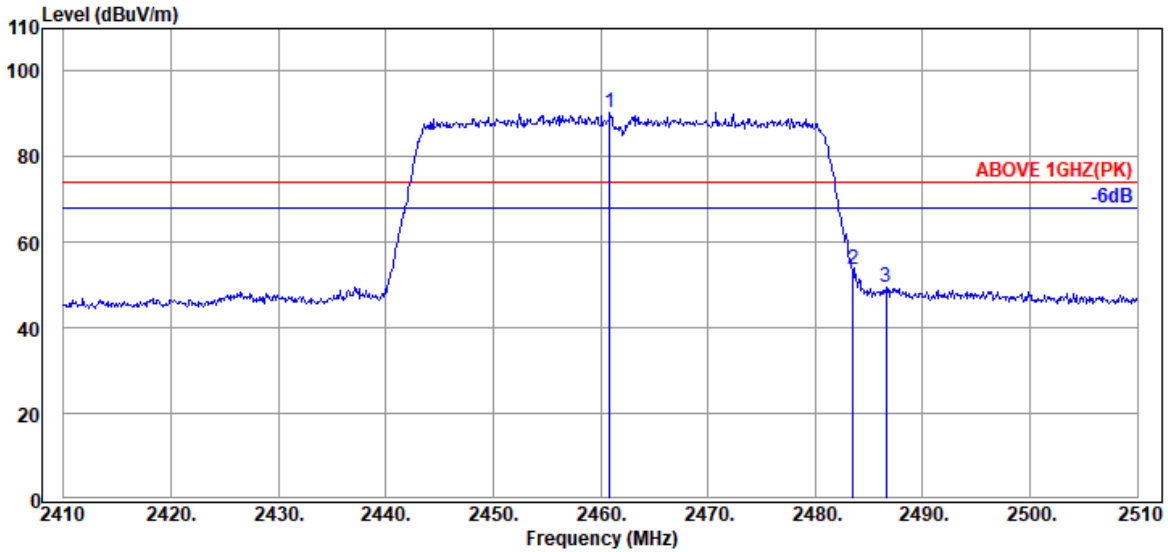

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.900	28.43	5.84	39.92	95.93	90.28	---	---	Peak
2483.500	28.47	5.87	39.92	59.16	53.58	74.00	20.42	Peak
2486.600	28.47	5.87	39.92	55.01	49.43	74.00	24.57	Peak

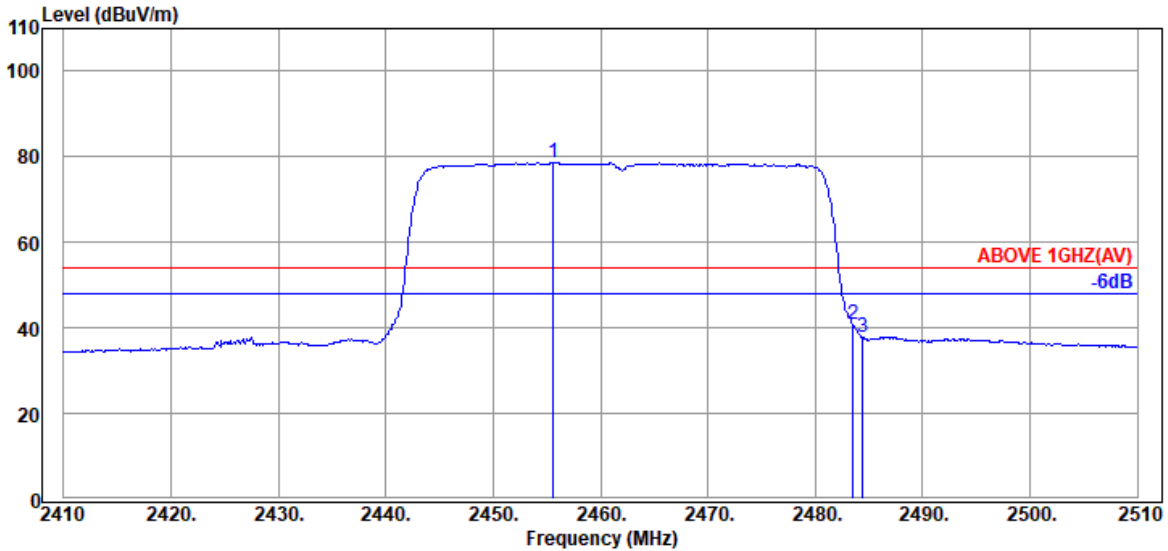


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.600	28.41	5.83	39.92	84.34	78.66	---	---	Average
2483.500	28.47	5.87	39.92	46.53	40.95	54.00	13.05	Average
2484.400	28.47	5.87	39.92	43.53	37.95	54.00	16.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

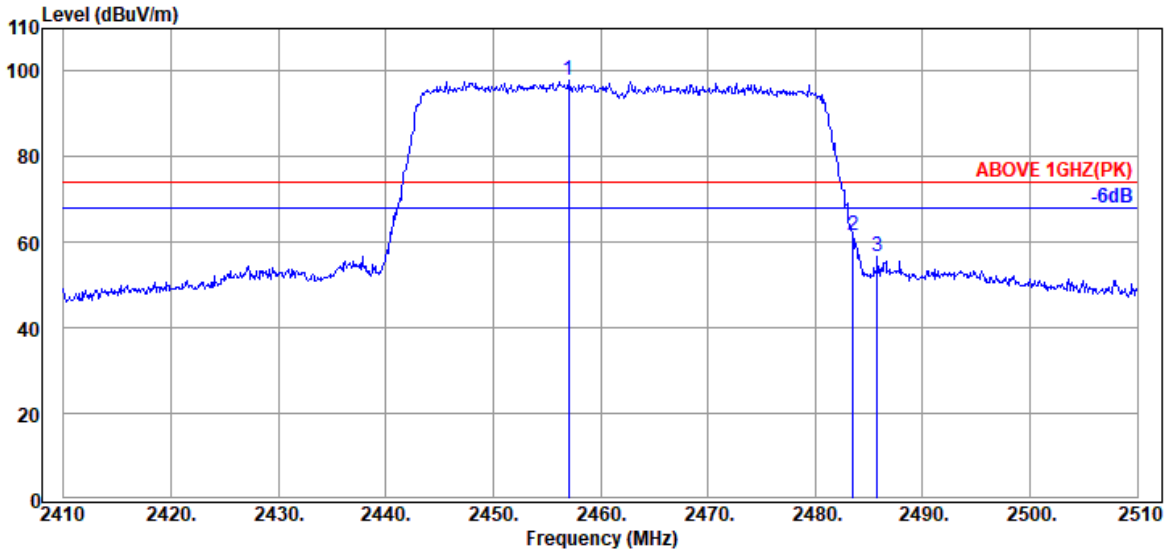

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.000	28.41	5.83	39.92	103.42	97.74	---	---	Peak
2483.500	28.47	5.87	39.92	67.36	61.78	74.00	12.22	Peak
2485.800	28.47	5.87	39.92	62.32	56.74	74.00	17.26	Peak

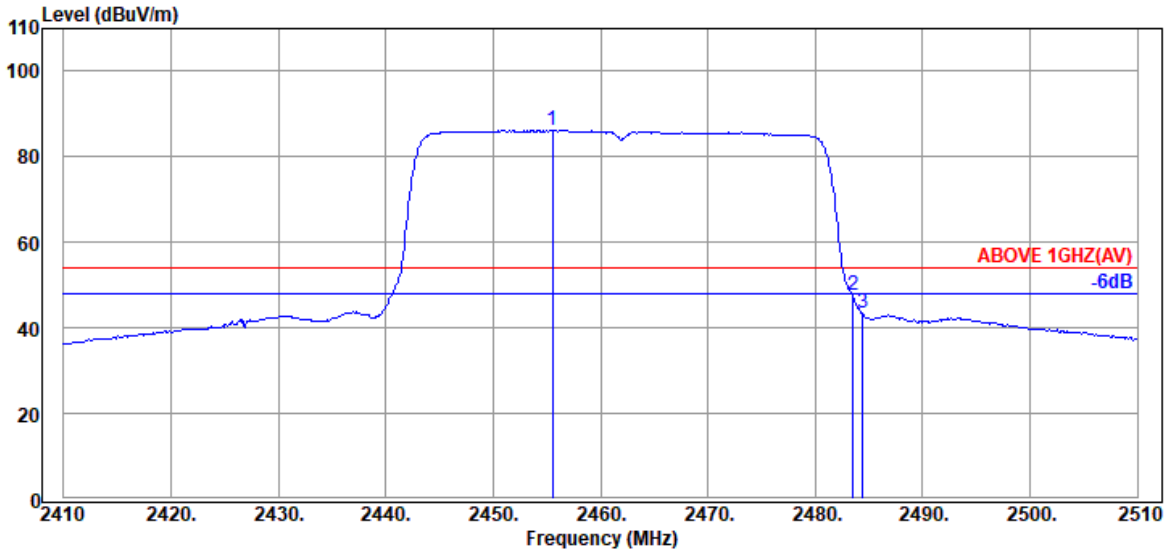


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	28.41	5.83	39.92	91.99	86.31	---	---	Average
2483.500	28.47	5.87	39.92	53.03	47.45	54.00	6.55	Average
2484.400	28.47	5.87	39.92	48.96	43.38	54.00	10.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

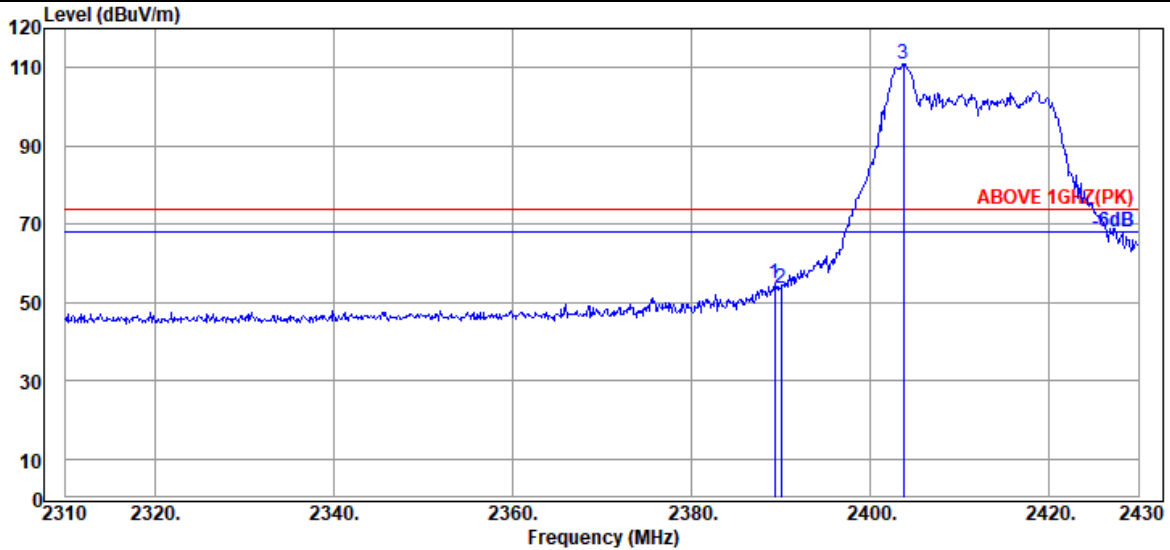

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	61.00	55.00	74.00	19.00	Peak
2390.040	28.21	5.72	39.93	59.55	53.55	74.00	20.45	Peak
@ 2403.720	28.10	5.74	39.93	117.13	111.04	---	---	Peak

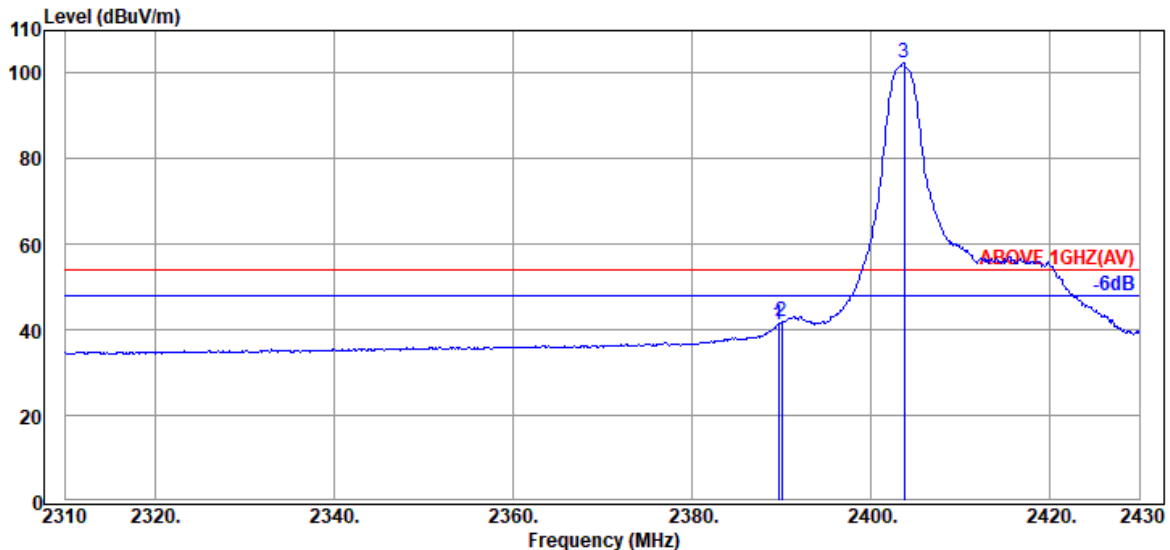


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	47.21	41.21	54.00	12.79	Average
2390.040	28.21	5.72	39.93	47.79	41.79	54.00	12.21	Average
@ 2403.720	28.10	5.74	39.93	108.47	102.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

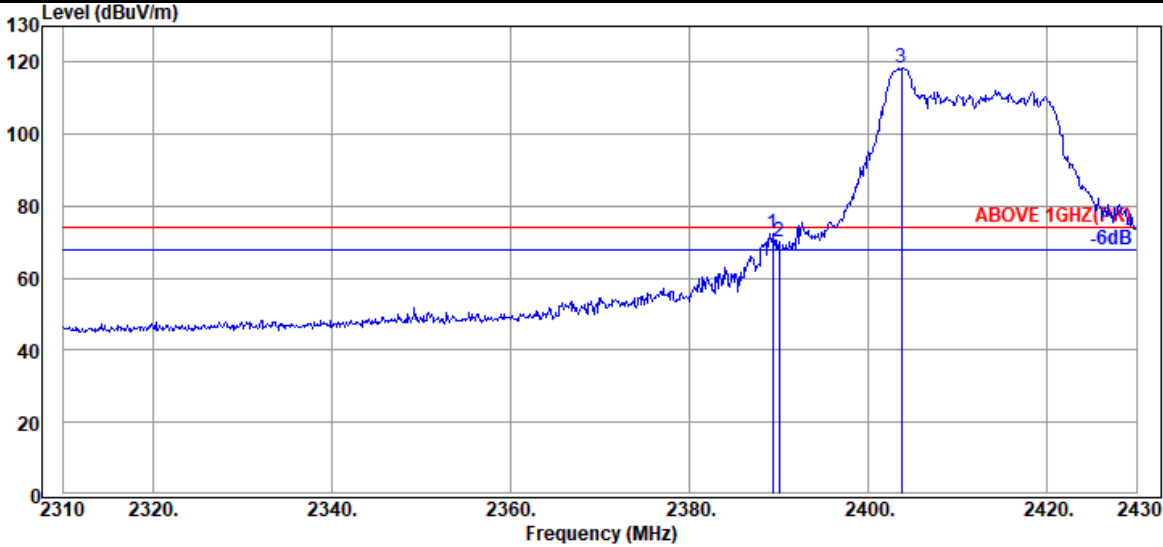

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	78.41	72.41	74.00	1.59	Peak
2390.040	28.21	5.72	39.93	76.06	70.06	74.00	3.94	Peak
@ 2403.720	28.10	5.74	39.93	124.31	118.22	---	---	Peak

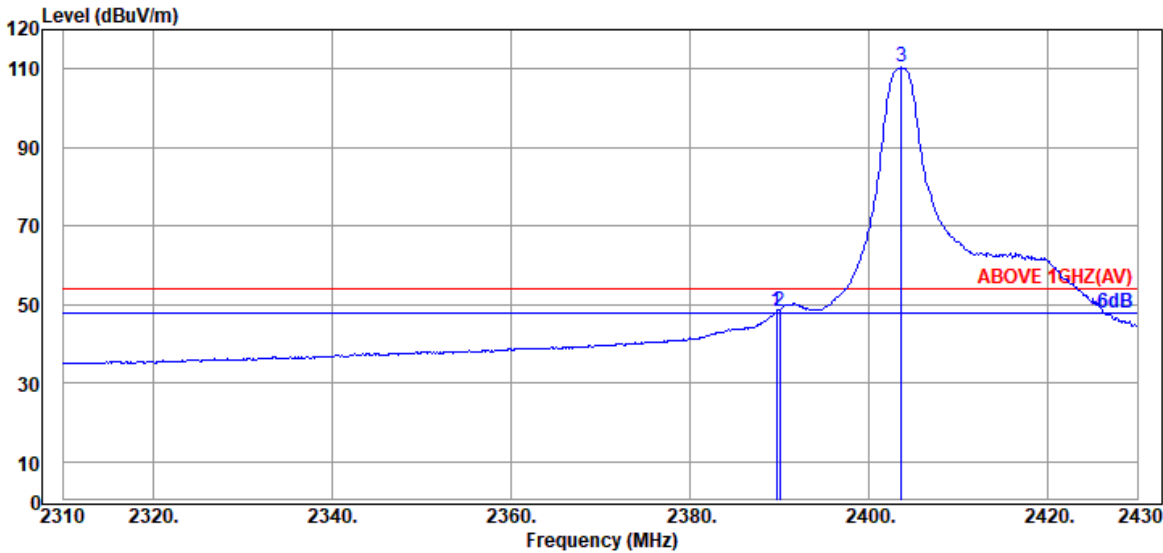


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	54.07	48.07	54.00	5.93	Average
2390.040	28.21	5.72	39.93	54.40	48.40	54.00	5.60	Average
@ 2403.600	28.10	5.74	39.93	116.54	110.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

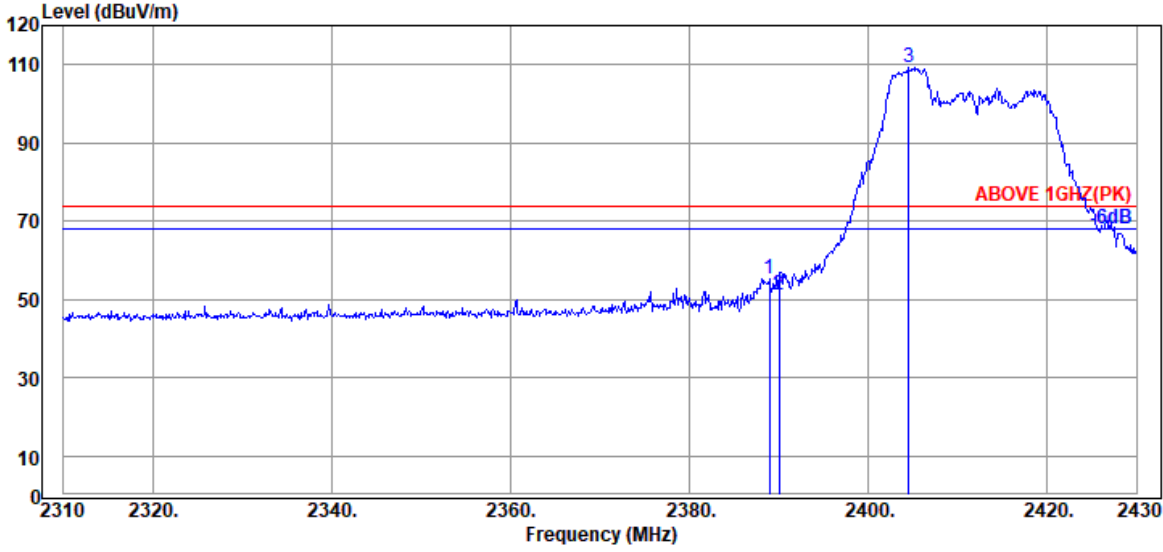

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.21	5.72	39.93	61.42	55.42	74.00	18.58	Peak
2390.040	28.21	5.72	39.93	57.22	51.22	74.00	22.78	Peak
@ 2404.560	28.14	5.75	39.93	115.19	109.15	---	---	Peak

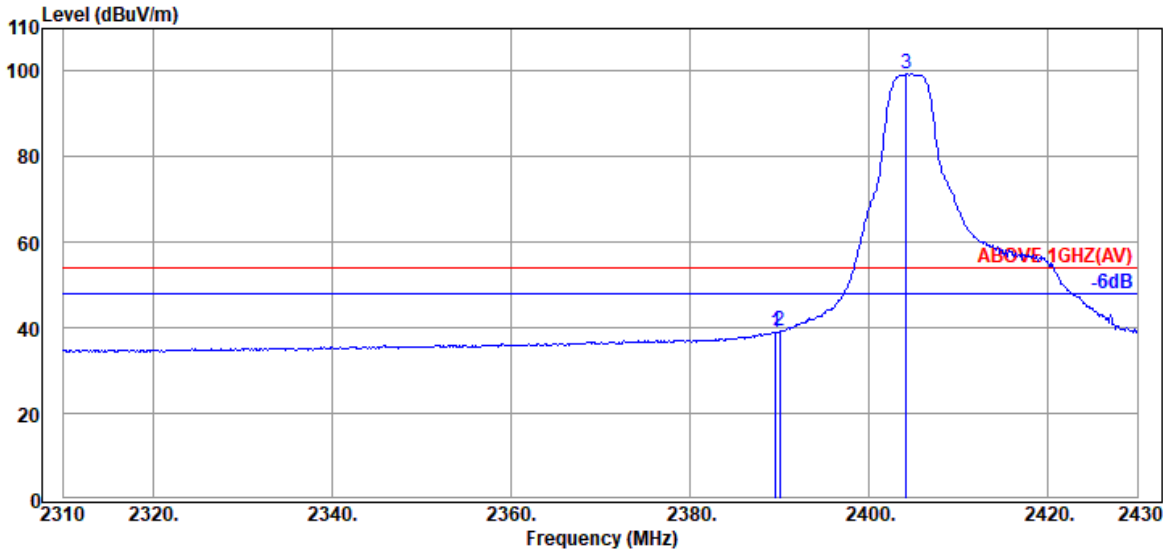


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.21	5.72	39.93	45.02	39.02	54.00	14.98	Average
2390.040	28.21	5.72	39.93	45.13	39.13	54.00	14.87	Average
@ 2404.200	28.10	5.74	39.93	105.57	99.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

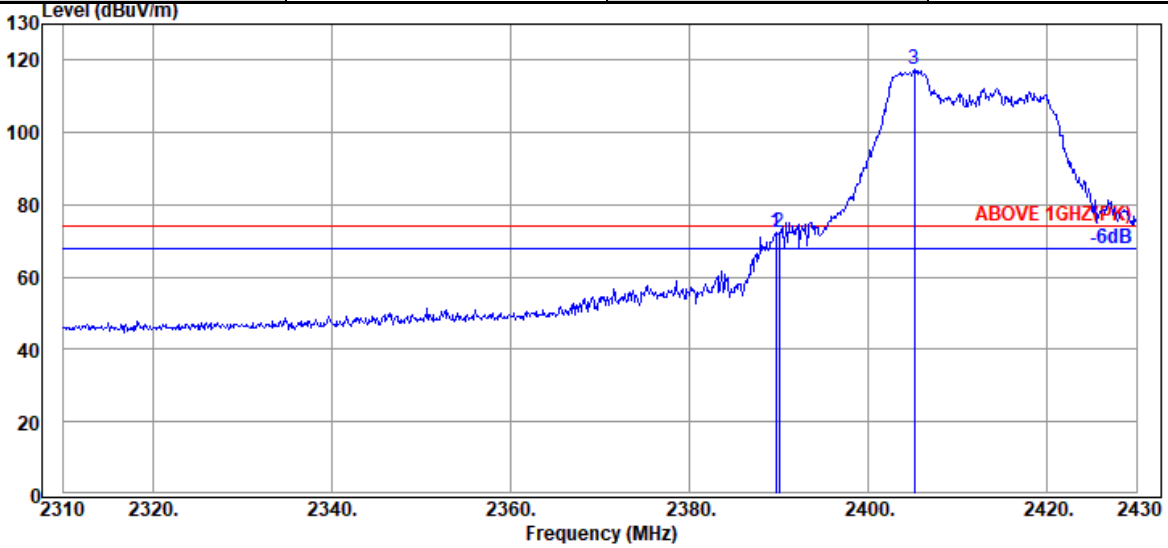

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	78.40	72.40	74.00	1.60	Peak
2390.040	28.21	5.72	39.93	78.27	72.27	74.00	1.73	Peak
@ 2405.160	28.14	5.75	39.93	123.44	117.40	---	---	Peak

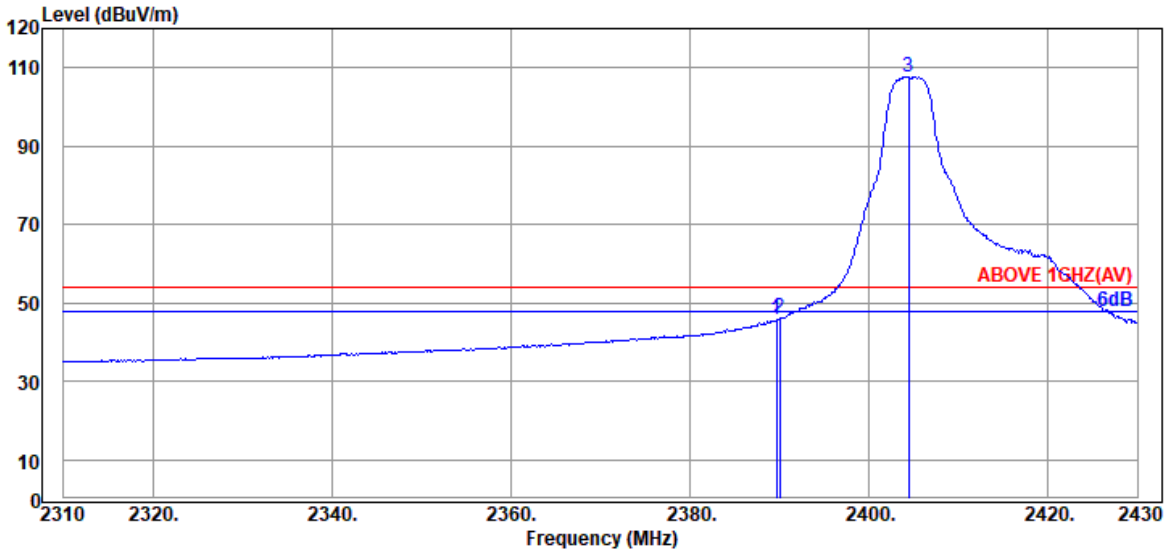


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	51.58	45.58	54.00	8.42	Average
2390.040	28.21	5.72	39.93	51.99	45.99	54.00	8.01	Average
@ 2404.440	28.14	5.75	39.93	113.73	107.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

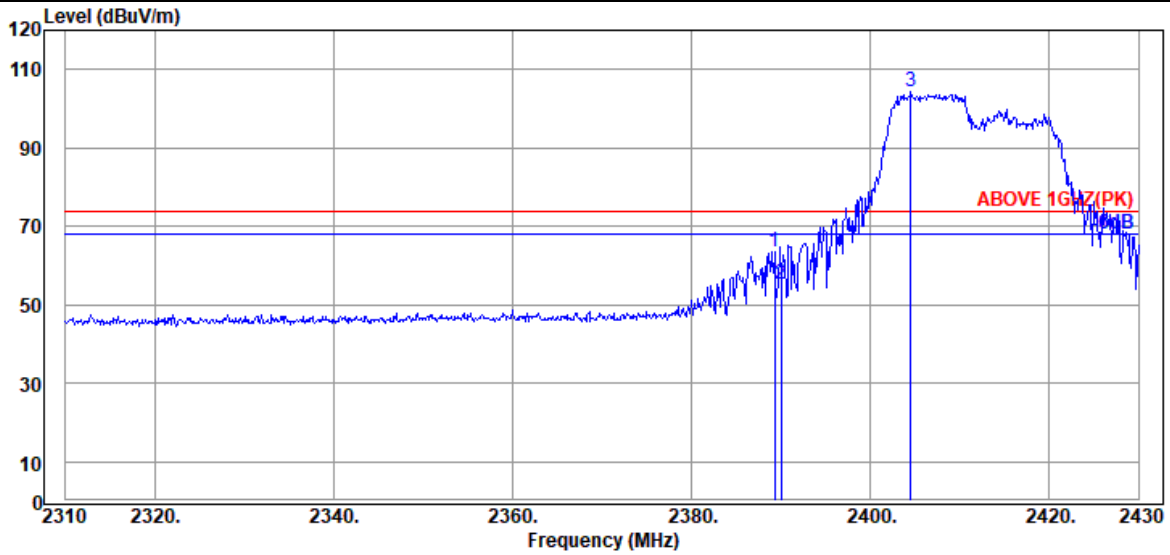

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.21	5.72	39.93	69.56	63.56	74.00	10.44	Peak
2390.040	28.21	5.72	39.93	61.40	55.40	74.00	18.60	Peak
@ 2404.560	28.14	5.75	39.93	110.32	104.28	---	---	Peak

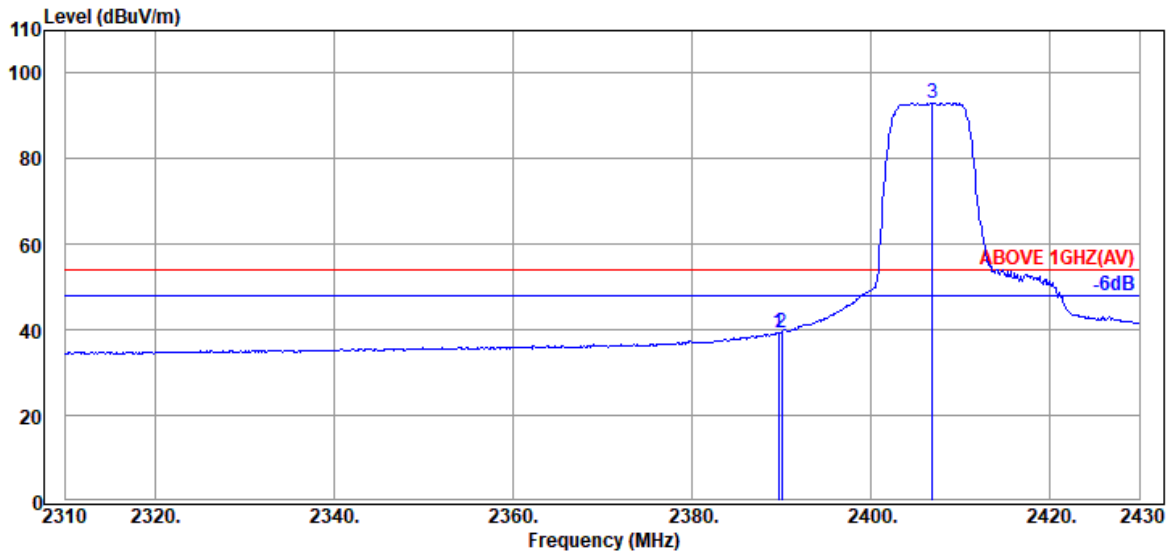


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	45.25	39.25	54.00	14.75	Average
2390.040	28.21	5.72	39.93	45.41	39.41	54.00	14.59	Average
@ 2406.840	28.14	5.75	39.93	99.02	92.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

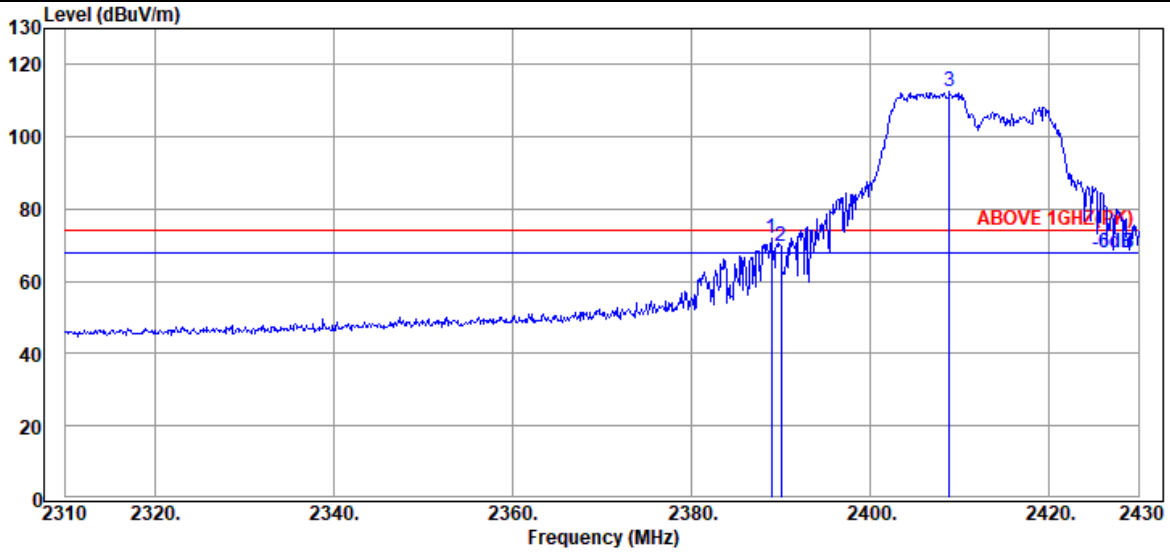

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.21	5.72	39.93	77.93	71.93	74.00	2.07	Peak
2390.040	28.21	5.72	39.93	75.72	69.72	74.00	4.28	Peak
@ 2408.880	28.14	5.75	39.93	118.67	112.63	---	---	Peak

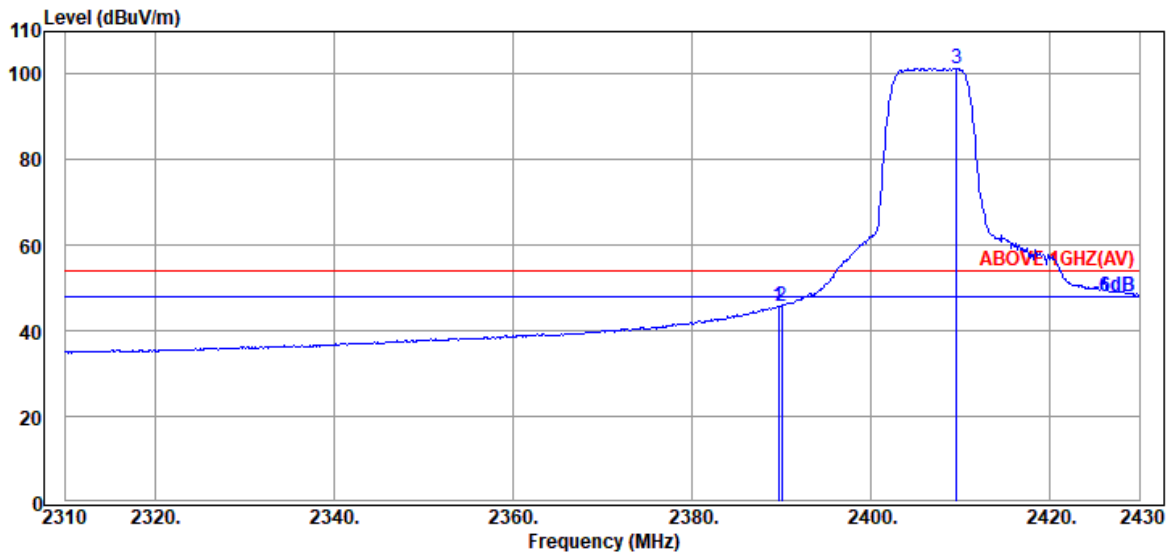


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.21	5.72	39.93	51.88	45.88	54.00	8.12	Average
2390.040	28.21	5.72	39.93	51.82	45.82	54.00	8.18	Average
@ 2409.600	28.14	5.75	39.93	107.31	101.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

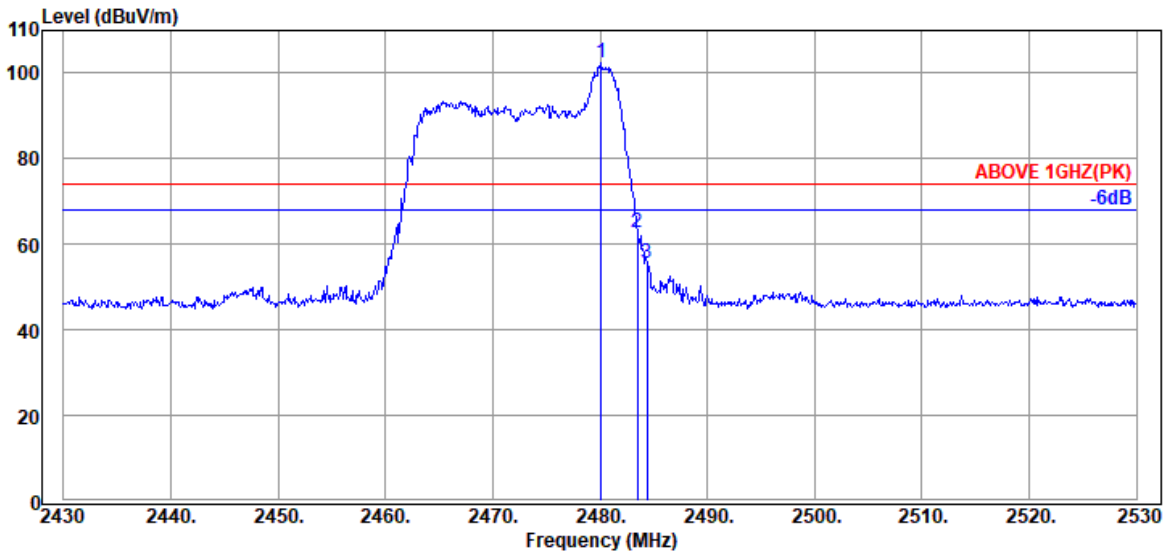

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	5.86	39.92	108.07	102.47	---	---	Peak
2483.500	28.47	5.87	39.92	68.40	62.82	74.00	11.18	Peak
2484.400	28.47	5.87	39.92	61.29	55.71	74.00	18.29	Peak

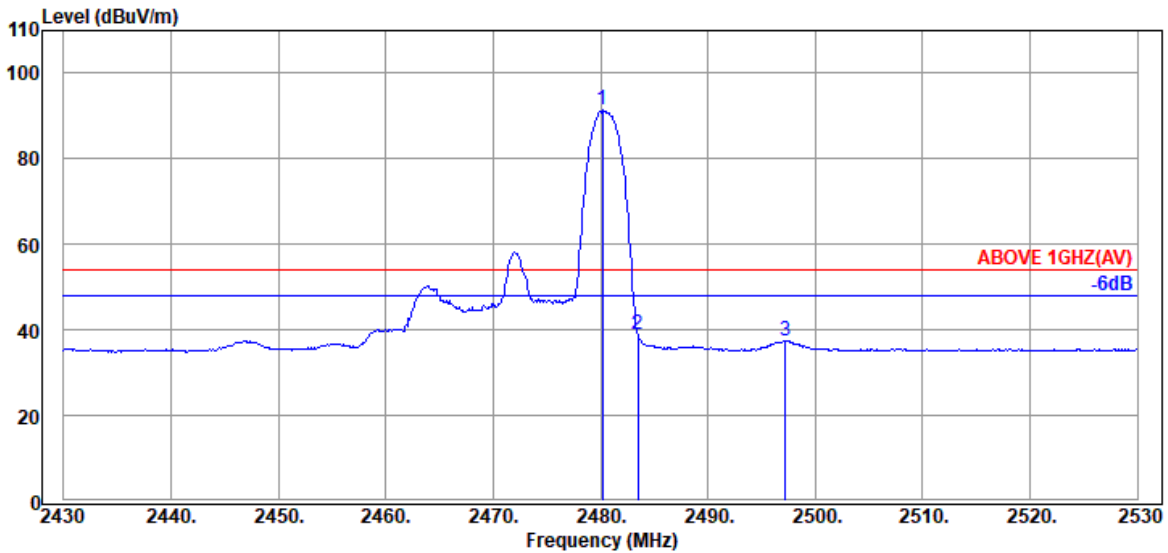


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	5.86	39.92	96.93	91.33	---	---	Average
2483.500	28.47	5.87	39.92	44.38	38.80	54.00	15.20	Average
2497.200	28.50	5.89	39.92	43.13	37.60	54.00	16.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

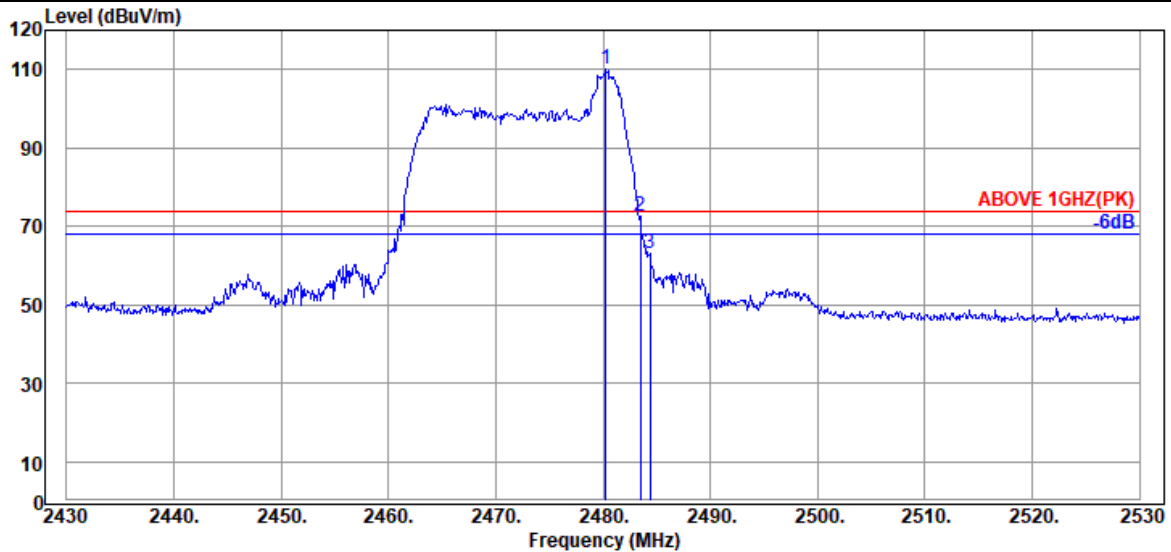

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.46	5.86	39.92	115.81	110.21	---	---	Peak
2483.500	28.47	5.87	39.92	78.08	72.50	74.00	1.50	Peak
2484.400	28.47	5.87	39.92	68.51	62.93	74.00	11.07	Peak

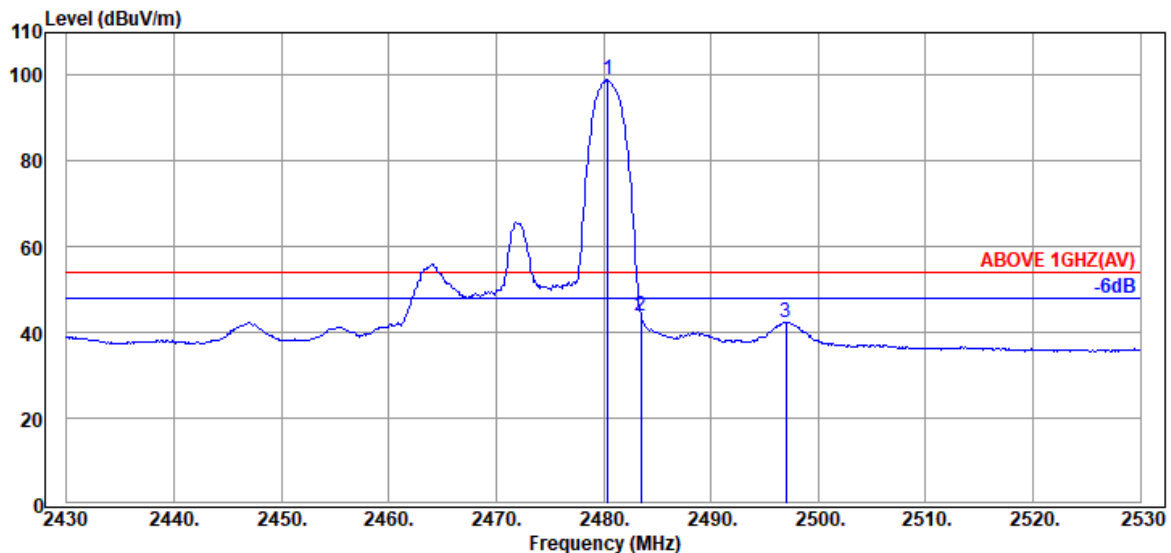


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.46	5.86	39.92	104.49	98.89	---	---	Average
2483.500	28.47	5.87	39.92	49.46	43.88	54.00	10.12	Average
2497.000	28.50	5.89	39.92	48.06	42.53	54.00	11.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

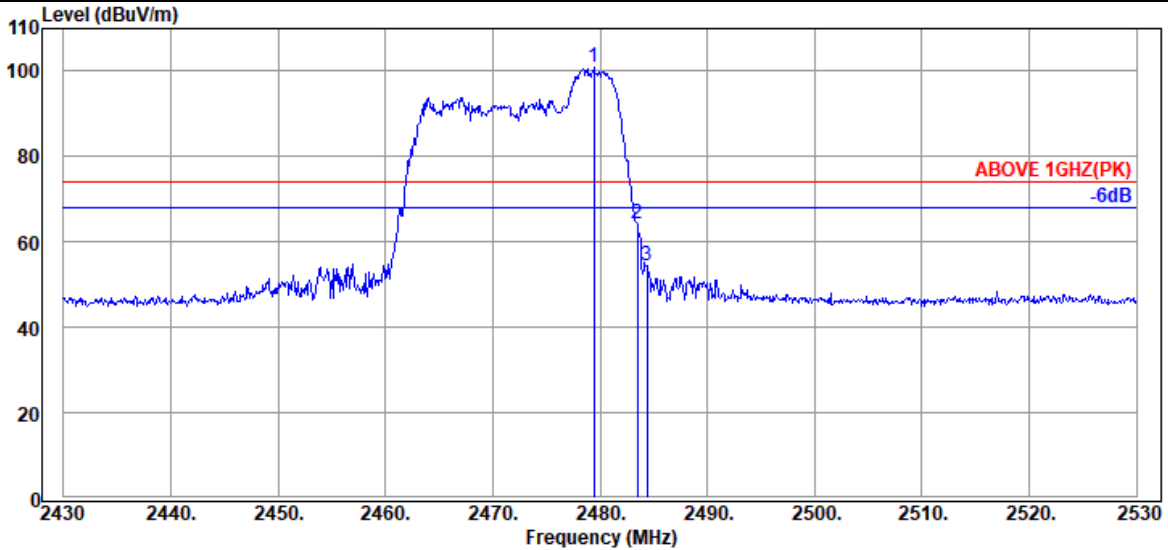

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.46	5.86	39.92	106.56	100.96	---	---	Peak
2483.500	28.47	5.87	39.92	69.80	64.22	74.00	9.78	Peak
2484.400	28.47	5.87	39.92	60.06	54.48	74.00	19.52	Peak

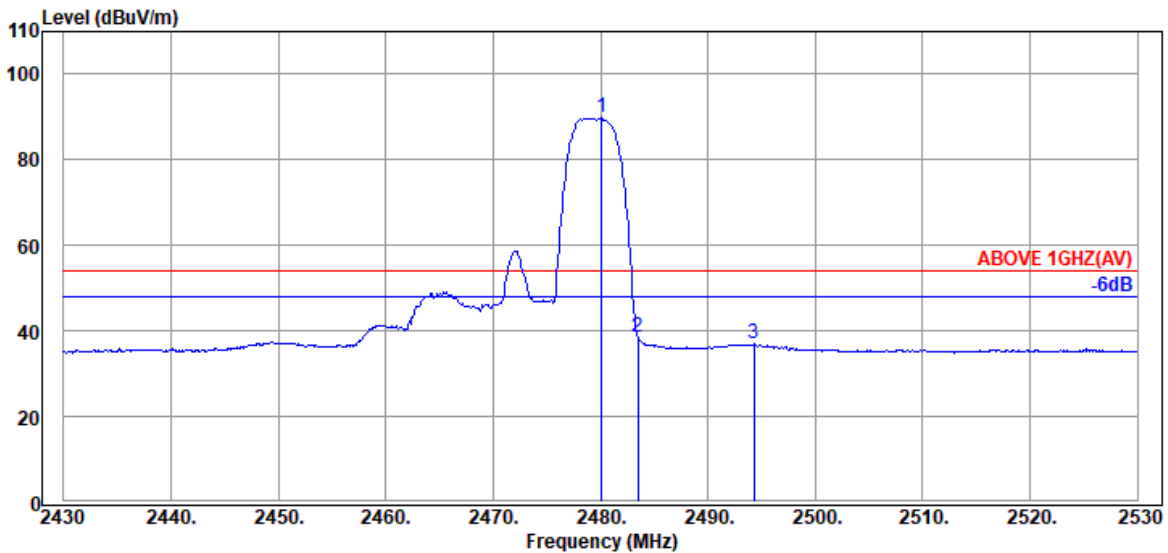


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	5.86	39.92	95.47	89.87	---	---	Average
2483.500	28.47	5.87	39.92	44.20	38.62	54.00	15.38	Average
2494.300	28.49	5.88	39.92	42.53	36.98	54.00	17.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

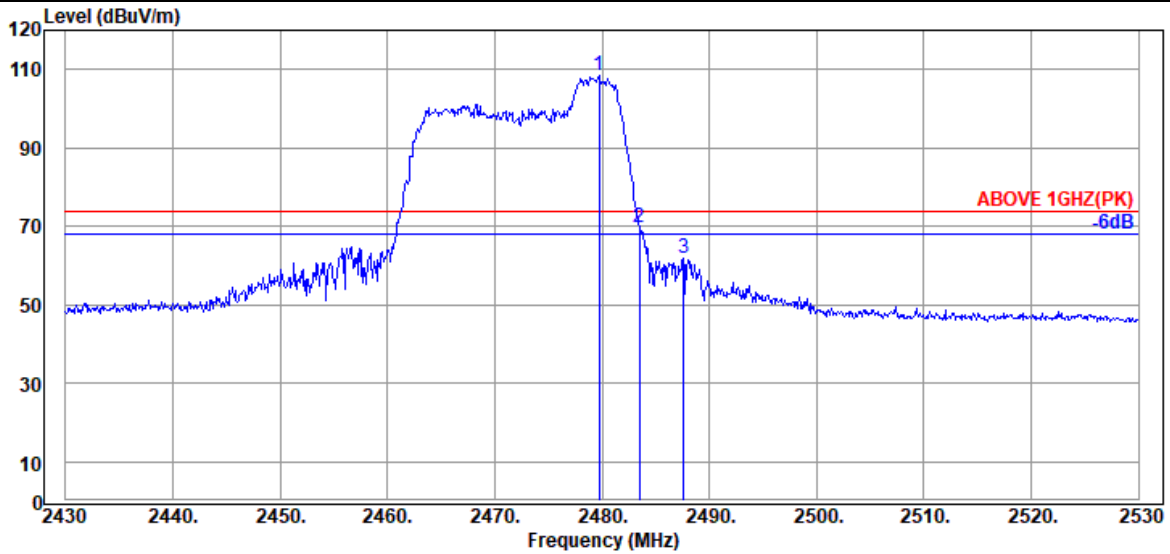

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	28.46	5.86	39.92	114.20	108.60	---	---	Peak
2483.500	28.47	5.87	39.92	75.10	69.52	74.00	4.48	Peak
2487.600	28.47	5.87	39.92	67.55	61.97	74.00	12.03	Peak

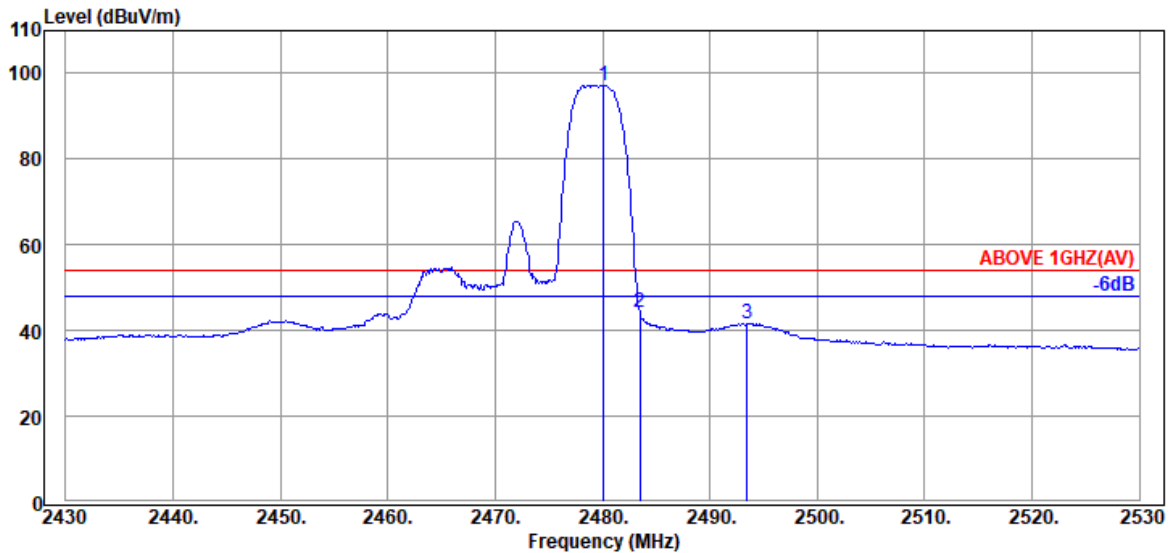


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	5.86	39.92	102.88	97.28	---	---	Average
2483.500	28.47	5.87	39.92	49.95	44.37	54.00	9.63	Average
2493.500	28.49	5.88	39.92	47.17	41.62	54.00	12.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

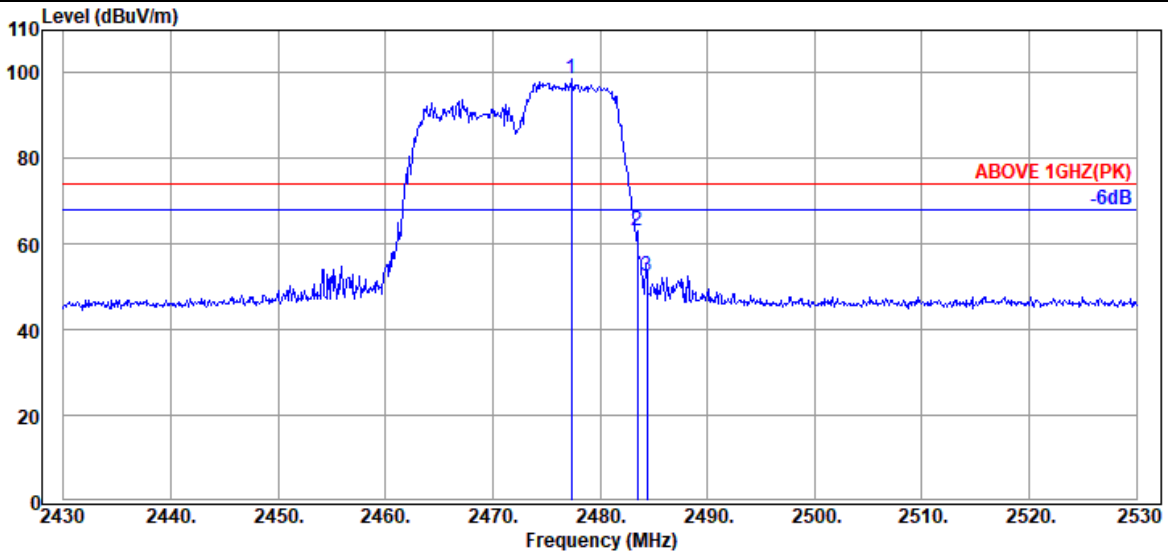

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.300	28.46	5.86	39.92	104.41	98.81	---	---	Peak
2483.500	28.47	5.87	39.92	68.64	63.06	74.00	10.94	Peak
2484.400	28.47	5.87	39.92	58.27	52.69	74.00	21.31	Peak

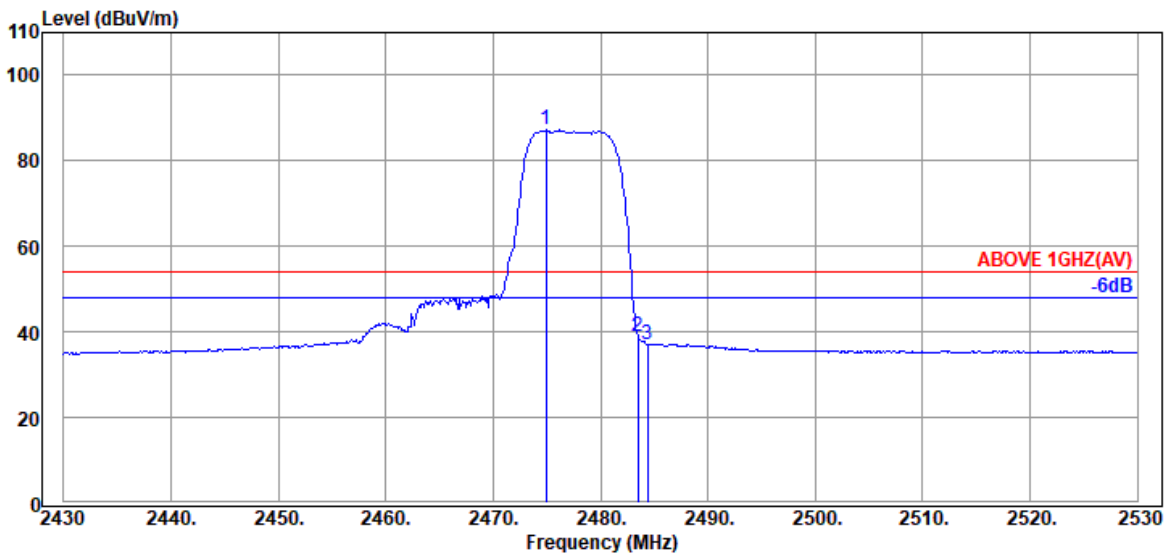


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.900	28.46	5.86	39.92	92.83	87.23	---	---	Average
2483.500	28.47	5.87	39.92	44.58	39.00	54.00	15.00	Average
2484.400	28.47	5.87	39.92	42.80	37.22	54.00	16.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

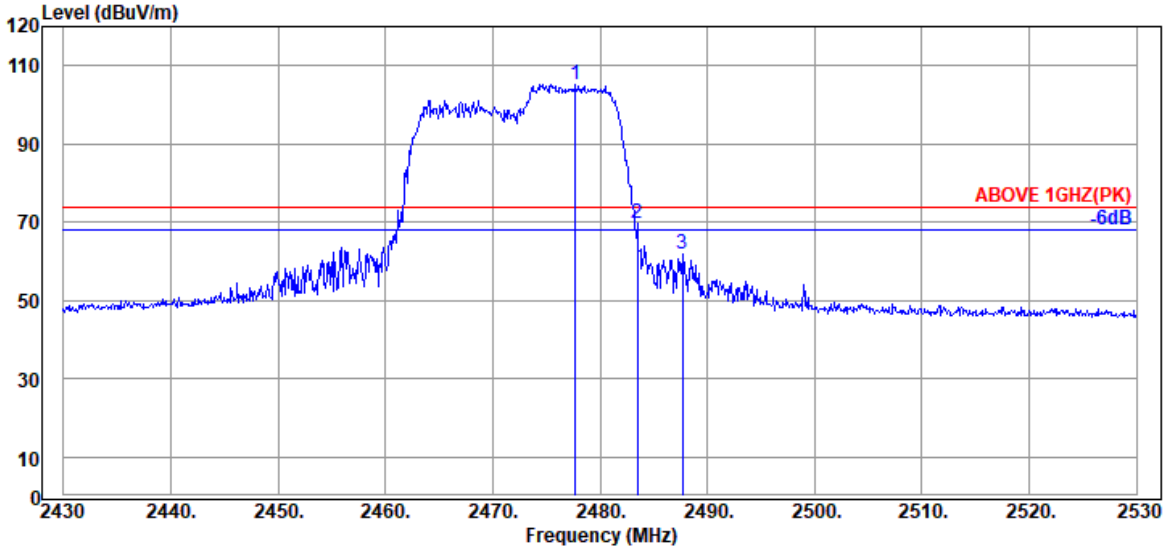

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.700	28.46	5.86	39.92	110.78	105.18	---	---	Peak
2483.500	28.47	5.87	39.92	75.27	69.69	74.00	4.31	Peak
2487.700	28.47	5.87	39.92	67.50	61.92	74.00	12.08	Peak

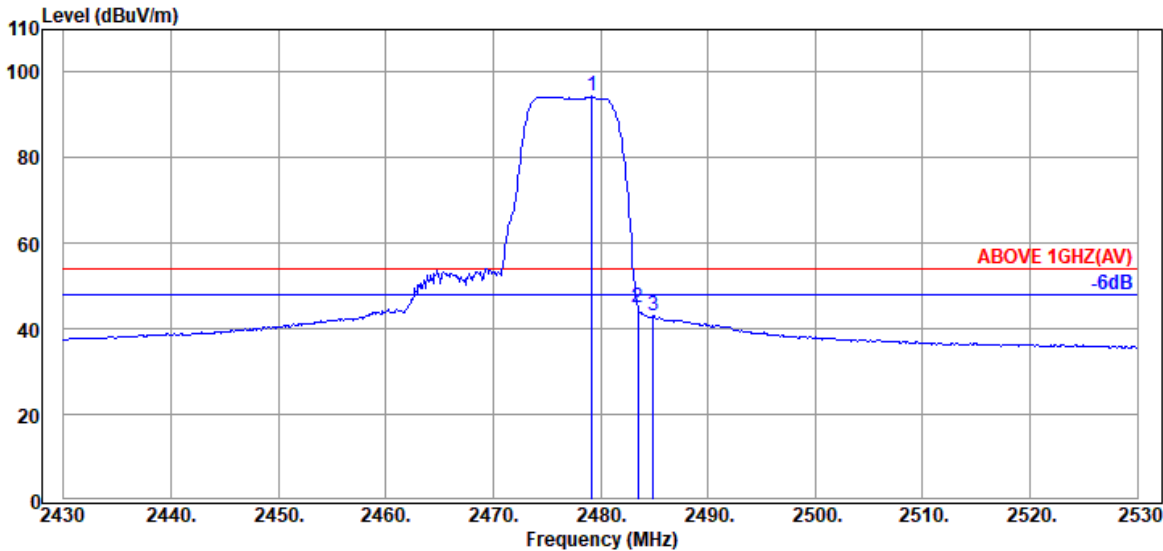


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.46	5.86	39.92	100.06	94.46	---	---	Average
2483.500	28.47	5.87	39.92	50.73	45.15	54.00	8.85	Average
2484.900	28.47	5.87	39.92	48.54	42.96	54.00	11.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

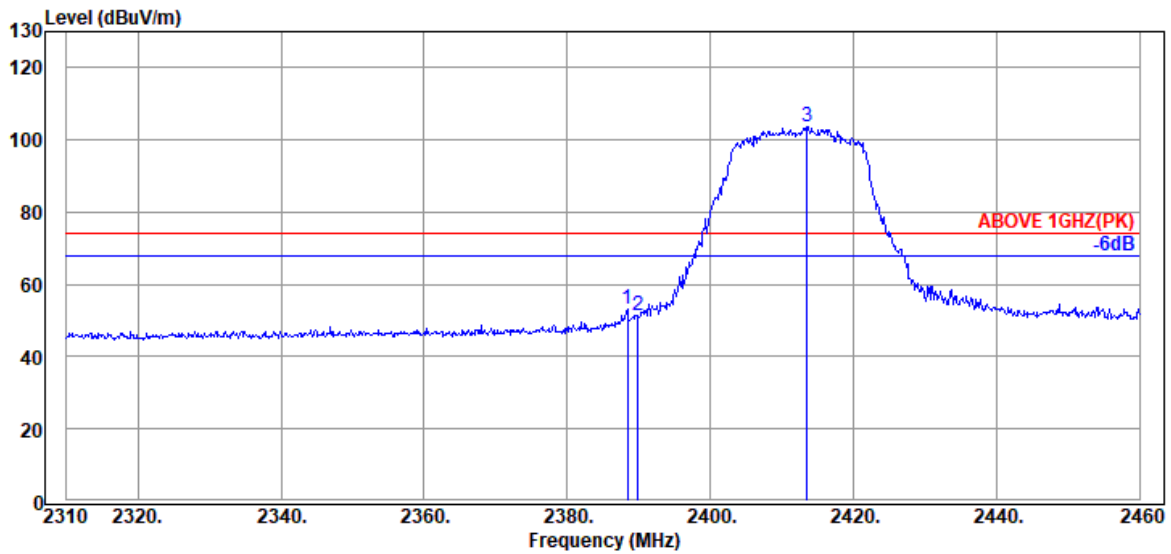

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.450	28.21	5.72	39.93	59.09	53.09	74.00	20.91	Peak
2389.950	28.21	5.72	39.93	57.49	51.49	74.00	22.51	Peak
@ 2413.500	28.19	5.76	39.93	109.63	103.65	---	---	Peak

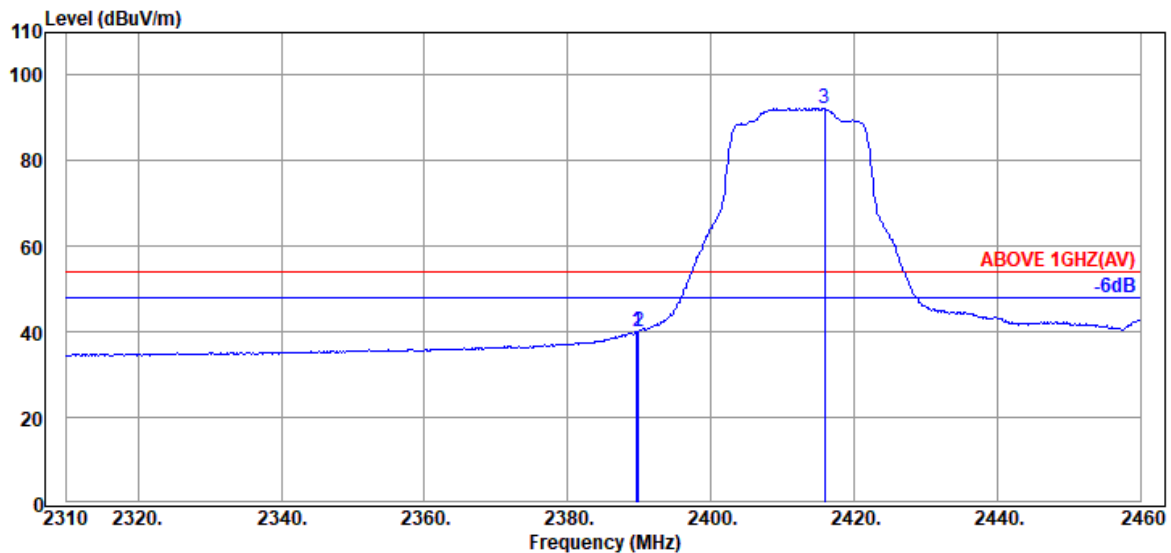


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.21	5.72	39.93	46.07	40.07	54.00	13.93	Average
2389.950	28.21	5.72	39.93	46.16	40.16	54.00	13.84	Average
@ 2415.900	28.19	5.76	39.93	98.34	92.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

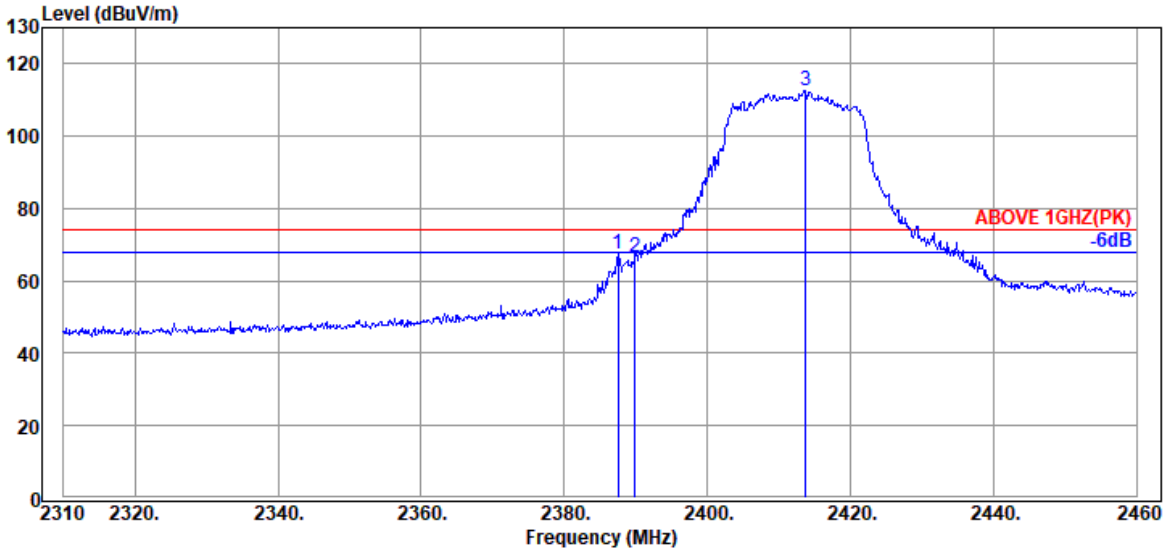

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.550	28.21	5.72	39.93	73.23	67.23	74.00	6.77	Peak
2389.950	28.21	5.72	39.93	72.51	66.51	74.00	7.49	Peak
@ 2413.800	28.19	5.76	39.93	118.52	112.54	---	---	Peak

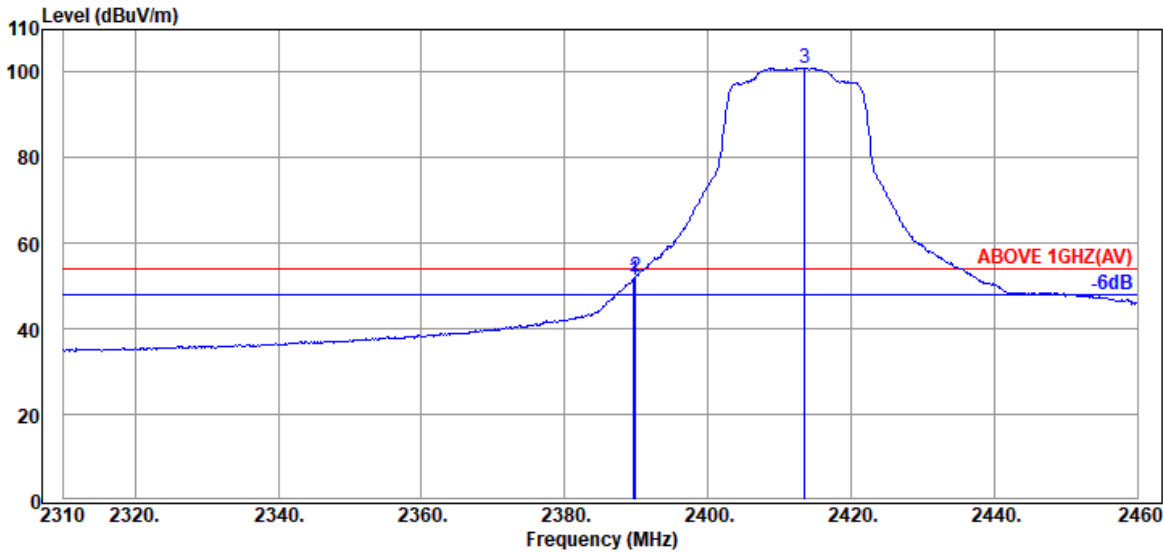


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.21	5.72	39.93	57.49	51.49	54.00	2.51	Average
2389.950	28.21	5.72	39.93	58.28	52.28	54.00	1.72	Average
@ 2413.500	28.19	5.76	39.93	106.99	101.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

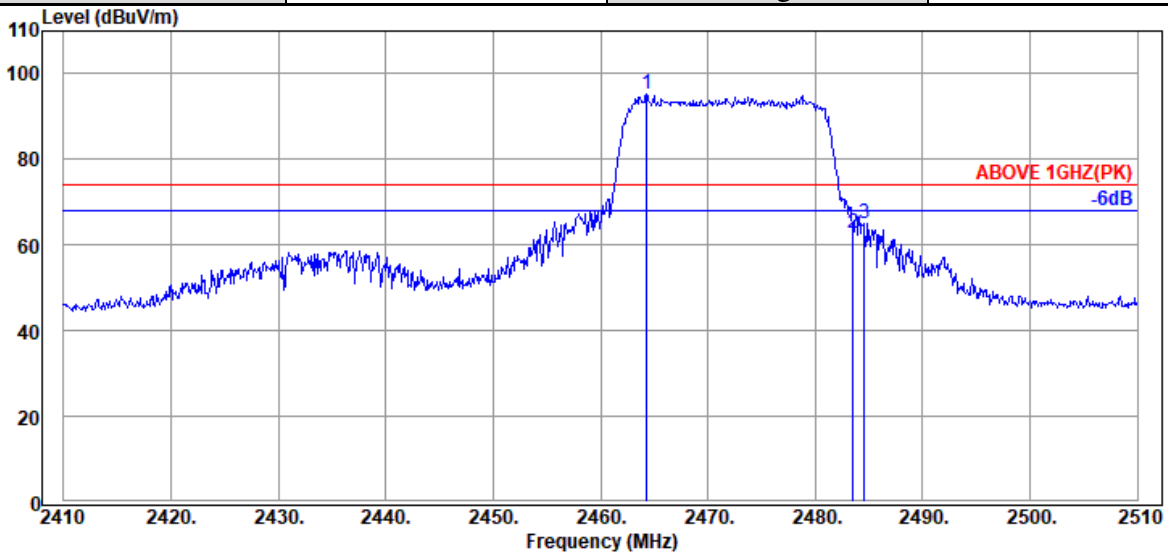

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.300	28.43	5.84	39.92	100.73	95.08	---	---	Peak
2483.500	28.47	5.87	39.92	68.26	62.68	74.00	11.32	Peak
2484.600	28.47	5.87	39.92	70.62	65.04	74.00	8.96	Peak

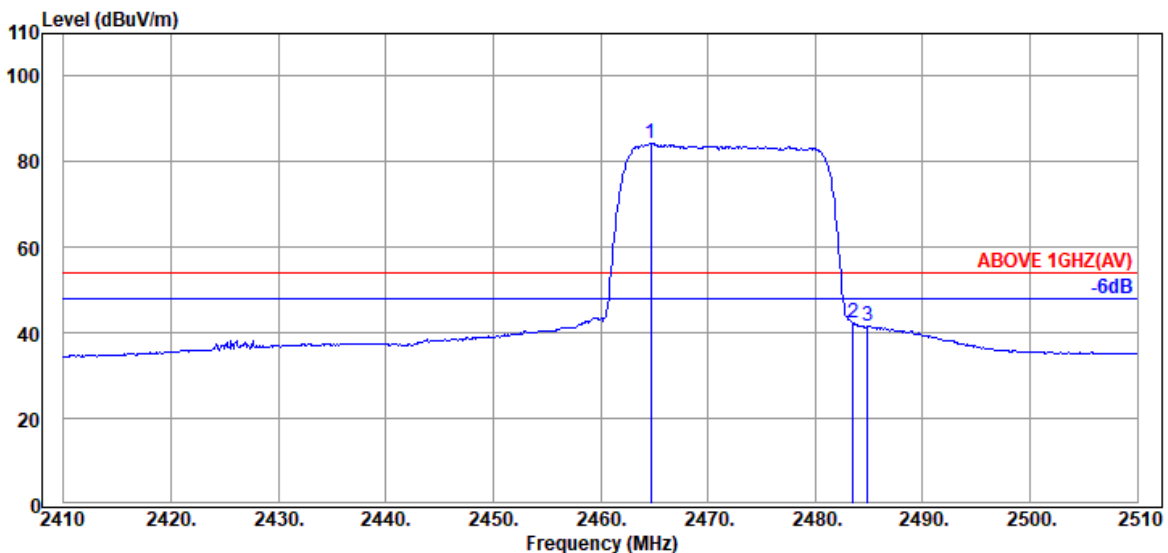


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	28.43	5.84	39.92	89.94	84.29	---	---	Average
2483.500	28.47	5.87	39.92	48.10	42.52	54.00	11.48	Average
2484.900	28.47	5.87	39.92	47.26	41.68	54.00	12.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

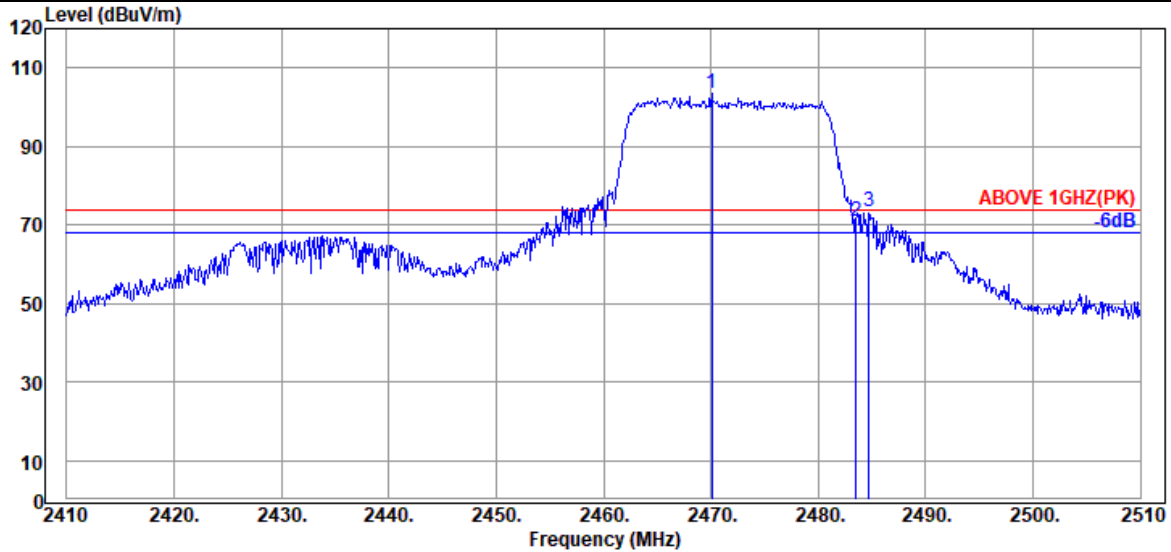

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.100	28.44	5.85	39.92	109.04	103.41	---	---	Peak
2483.500	28.47	5.87	39.92	76.50	70.92	74.00	3.08	Peak
2484.700	28.47	5.87	39.92	79.07	73.49	74.00	0.51	Peak

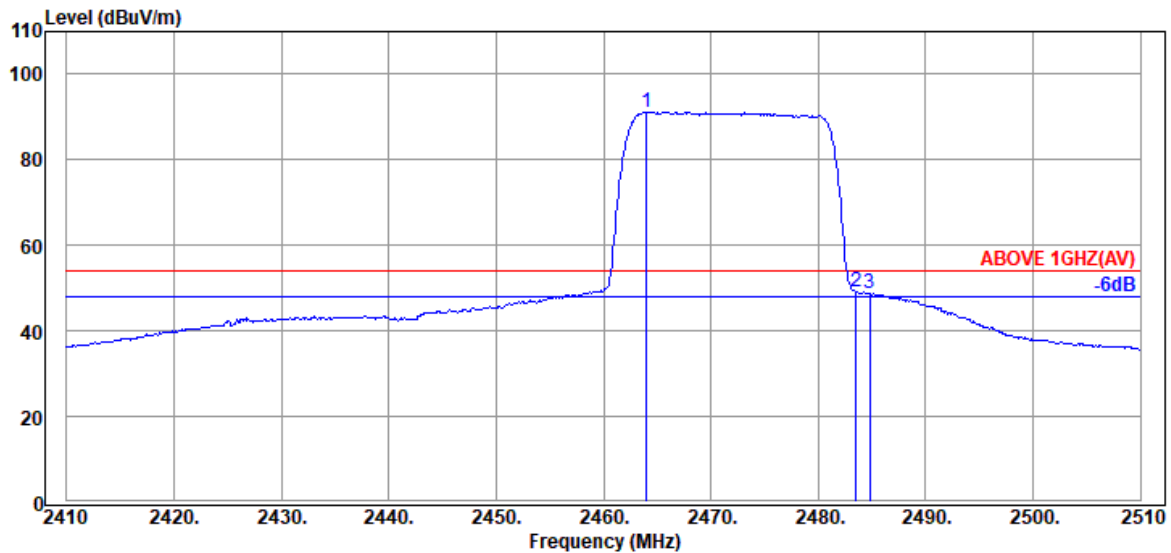


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.43	5.84	39.92	96.81	91.16	---	---	Average
2483.500	28.47	5.87	39.92	54.81	49.23	54.00	4.77	Average
2484.800	28.47	5.87	39.92	54.53	48.95	54.00	5.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

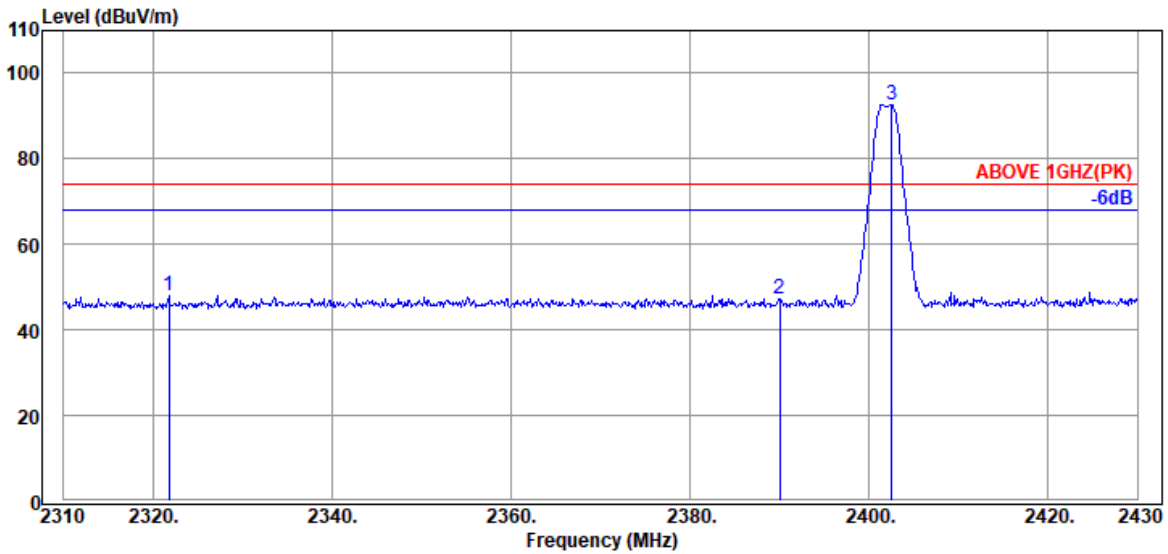

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2321.760	28.25	5.61	39.94	54.23	48.15	74.00	25.85	Peak
2390.040	28.21	5.72	39.93	53.41	47.41	74.00	26.59	Peak
@ 2402.520	28.10	5.74	39.93	98.84	92.75	---	---	Peak

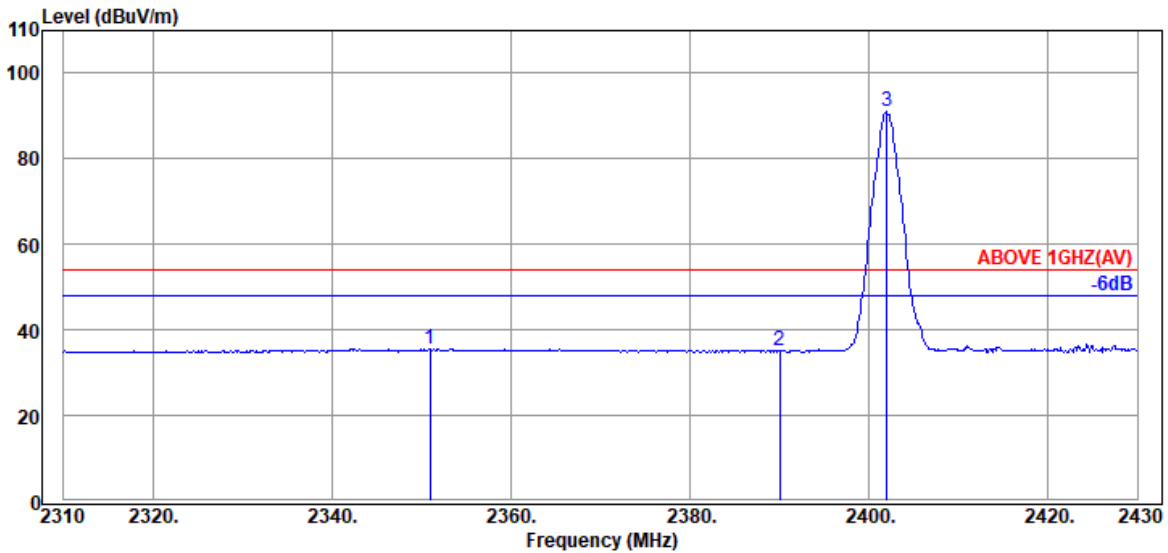


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2350.920	28.50	5.66	39.93	41.28	35.51	54.00	18.49	Average
2390.040	28.21	5.72	39.93	41.01	35.01	54.00	18.99	Average
@ 2402.040	28.10	5.74	39.93	97.29	91.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

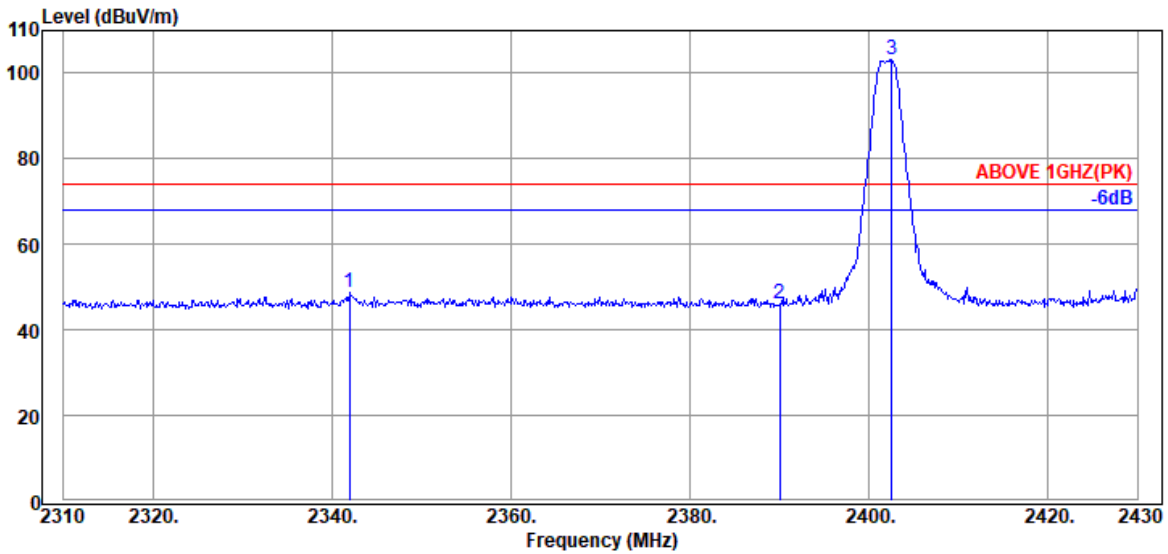

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.920	28.40	5.64	39.93	54.64	48.75	74.00	25.25	Peak
2390.040	28.21	5.72	39.93	52.04	46.04	74.00	27.96	Peak
@ 2402.520	28.10	5.74	39.93	109.14	103.05	---	---	Peak

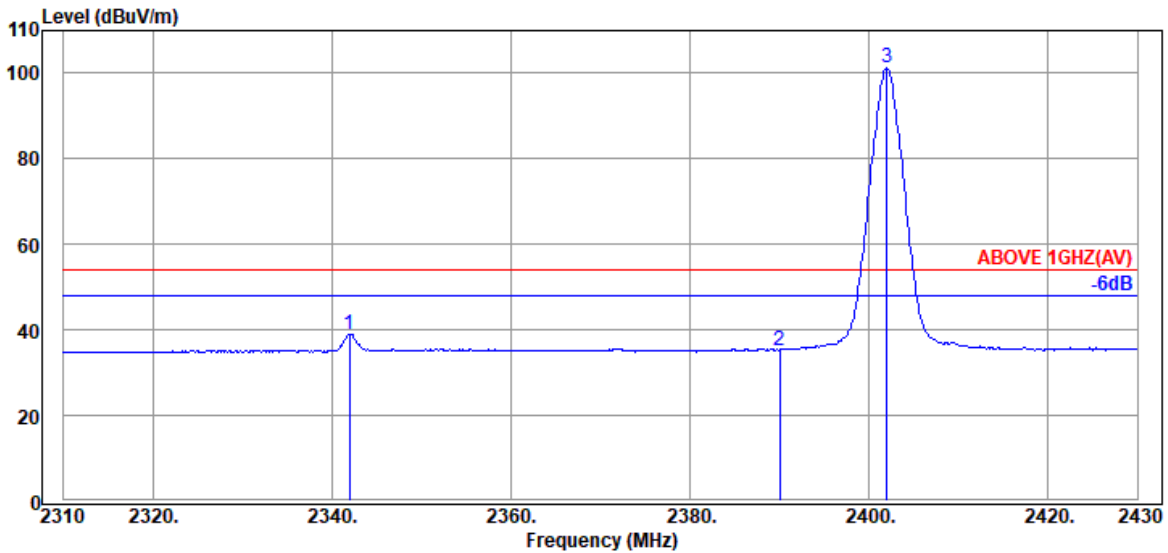


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.920	28.40	5.64	39.93	44.99	39.10	54.00	14.90	Average
2390.040	28.21	5.72	39.93	41.26	35.26	54.00	18.74	Average
@ 2402.040	28.10	5.74	39.93	107.38	101.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

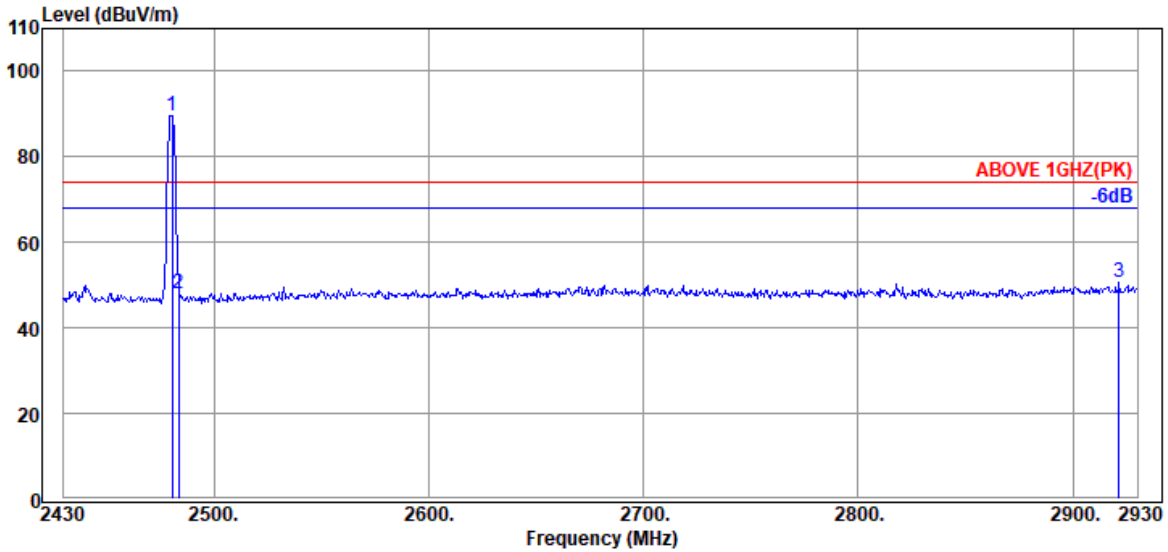

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	5.86	39.92	95.30	89.70	---	---	Peak
2483.500	28.47	5.87	39.92	53.77	48.19	74.00	25.81	Peak
2921.500	29.95	6.84	40.04	54.07	50.82	74.00	23.18	Peak

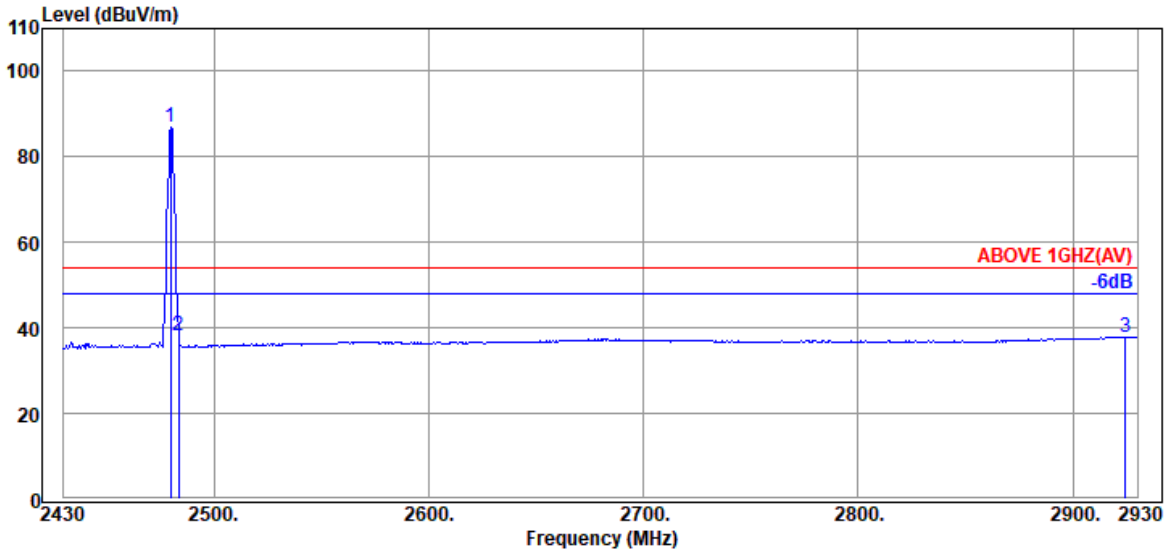


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	92.62	87.02	---	---	Average
2483.500	28.47	5.87	39.92	43.72	38.14	54.00	15.86	Average
2924.500	29.95	6.84	40.04	41.21	37.96	54.00	16.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

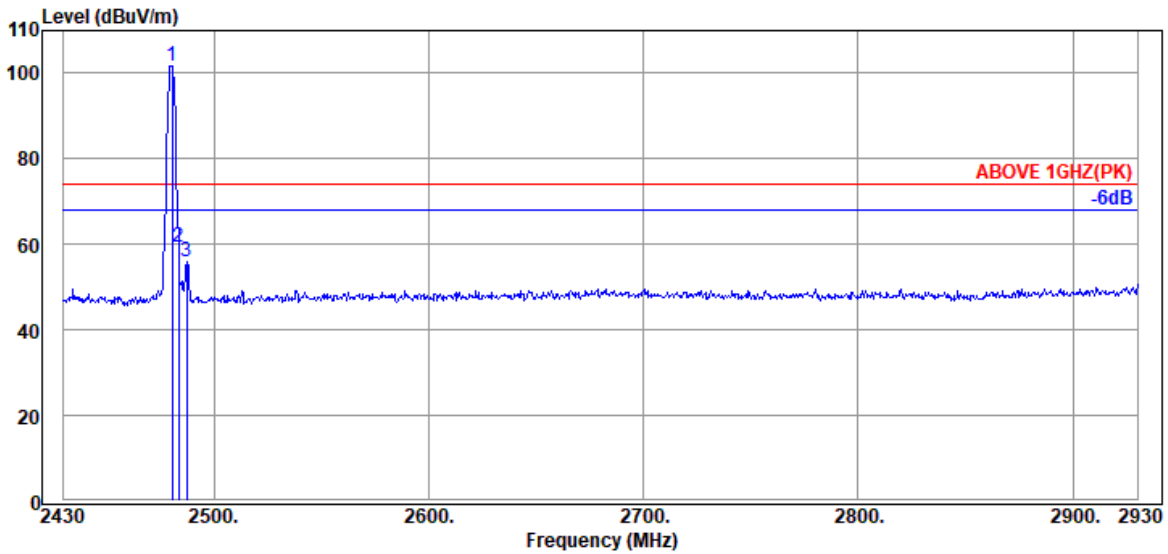

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.500	28.46	5.86	39.92	107.39	101.79	---	---	Peak
2483.500	28.47	5.87	39.92	64.75	59.17	74.00	14.83	Peak
2487.500	28.47	5.87	39.92	61.69	56.11	74.00	17.89	Peak

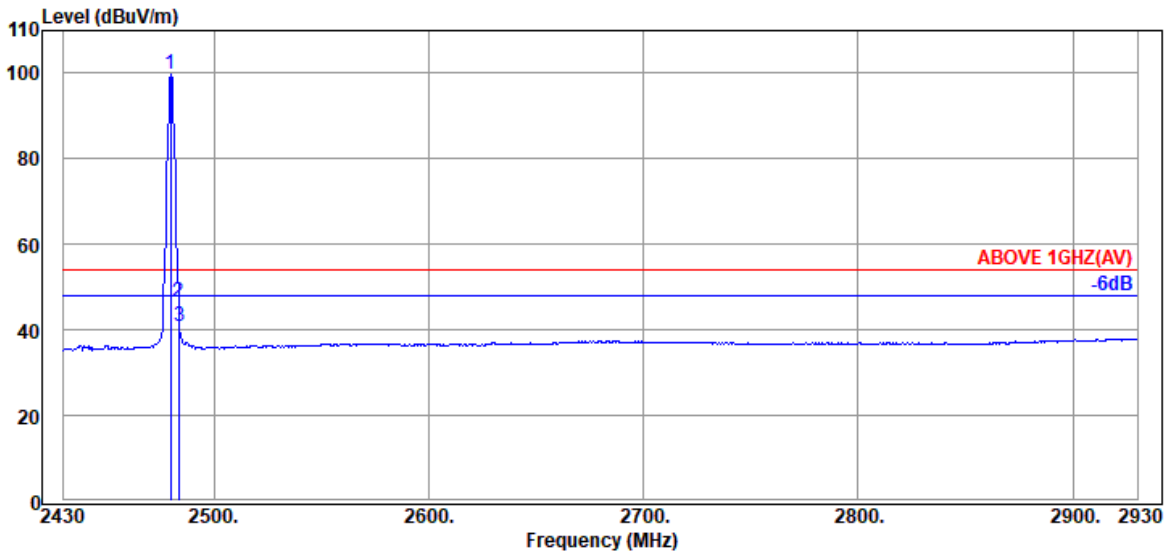


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.000	28.46	5.86	39.92	105.46	99.86	---	---	Average
2483.500	28.47	5.87	39.92	51.97	46.39	54.00	7.61	Average
2484.000	28.47	5.87	39.92	46.27	40.69	54.00	13.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


● Test SKU #1 (with INPAQ Antenna)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

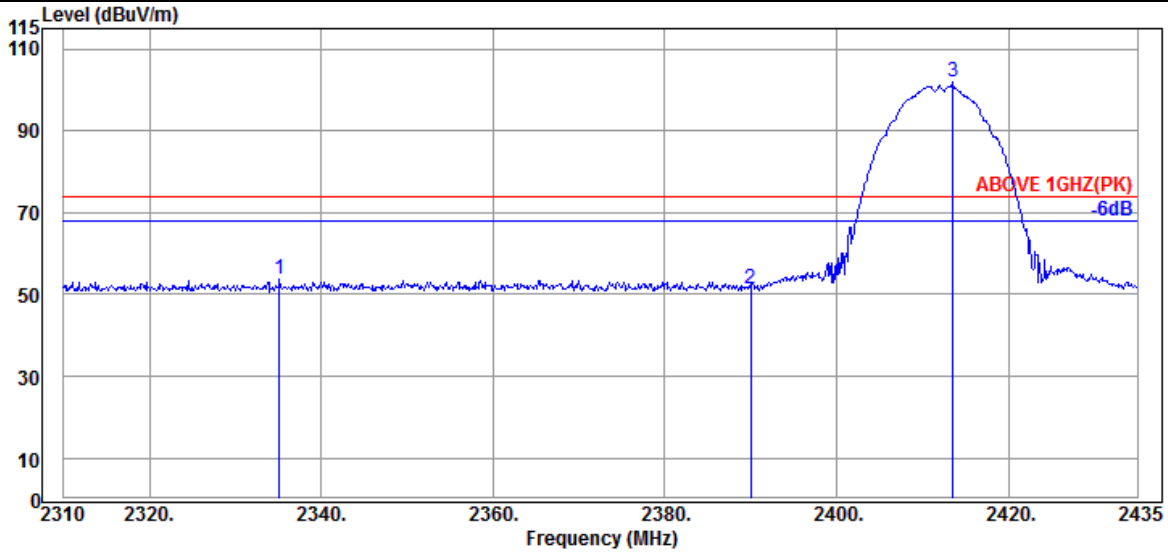

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2335.125	32.08	5.63	34.50	50.40	53.61	74.00	20.39	Peak
2390.000	32.00	5.72	34.51	48.32	51.53	74.00	22.47	Peak
@ 2413.500	32.00	5.76	34.51	98.65	101.90	---	---	Peak

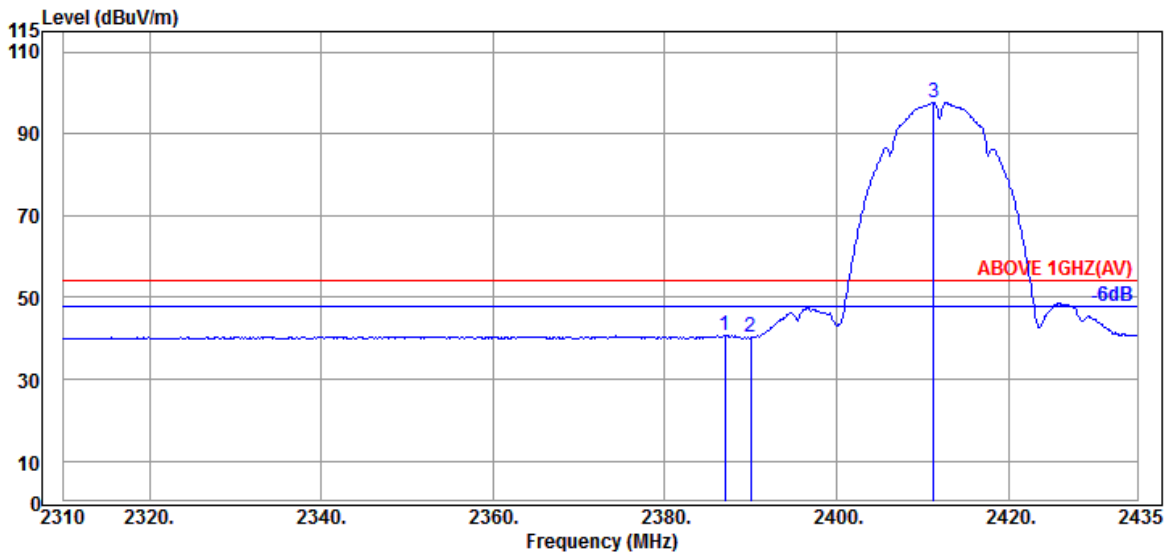


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.000	32.00	5.72	34.51	37.50	40.71	54.00	13.29	Average
2390.000	32.00	5.72	34.51	36.91	40.12	54.00	13.88	Average
@ 2411.250	32.00	5.76	34.51	94.47	97.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

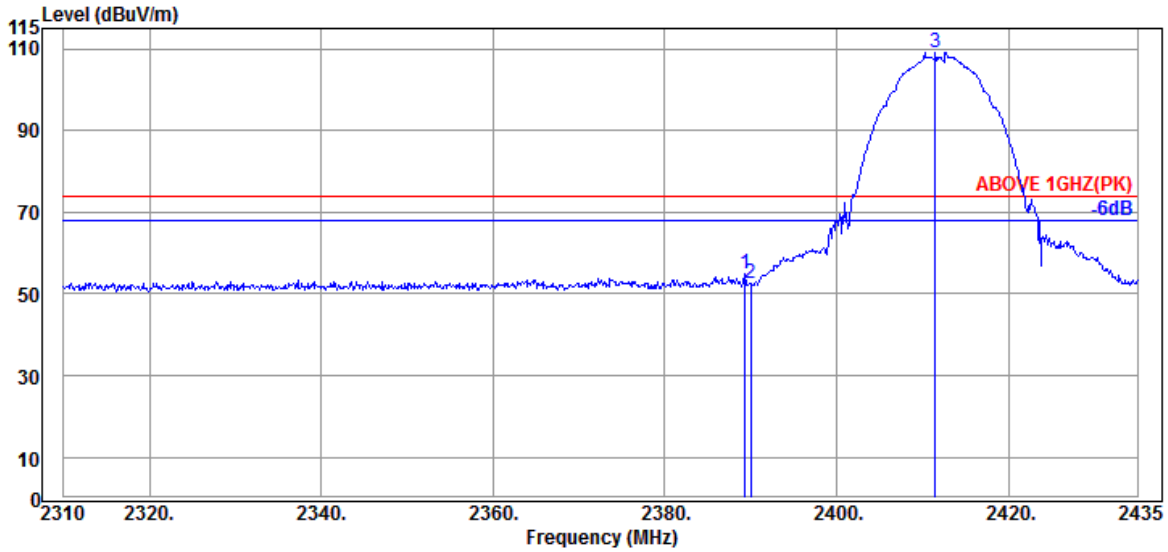

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	32.00	5.72	34.51	51.63	54.84	74.00	19.16	Peak
2390.000	32.00	5.72	34.51	49.18	52.39	74.00	21.61	Peak
@ 2411.500	32.00	5.76	34.51	105.95	109.20	---	---	Peak

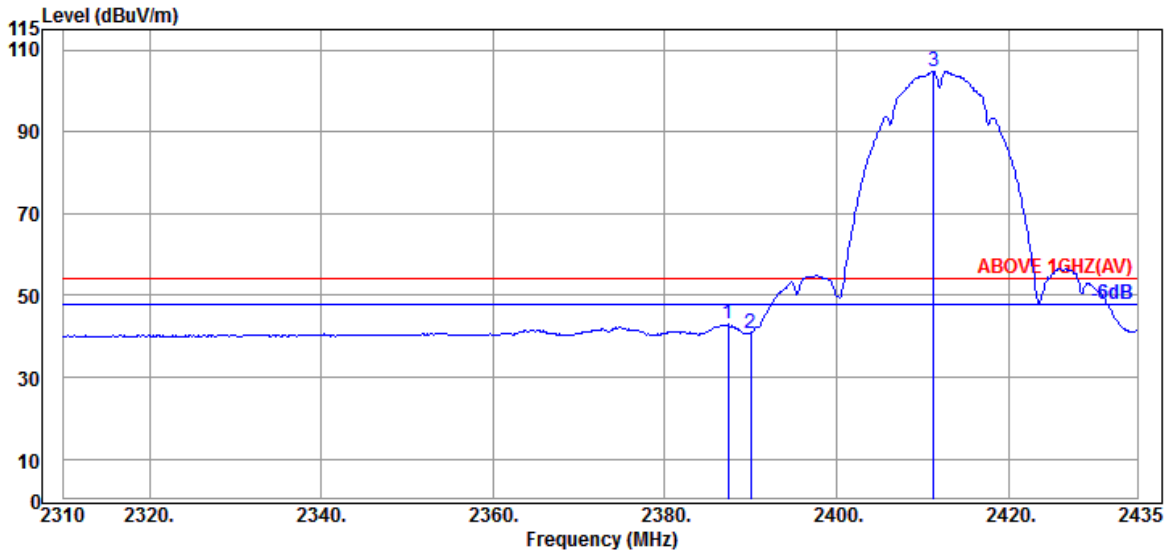


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.375	32.00	5.72	34.51	39.77	42.98	54.00	11.02	Average
2390.000	32.00	5.72	34.51	37.66	40.87	54.00	13.13	Average
@ 2411.250	32.00	5.76	34.51	101.51	104.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

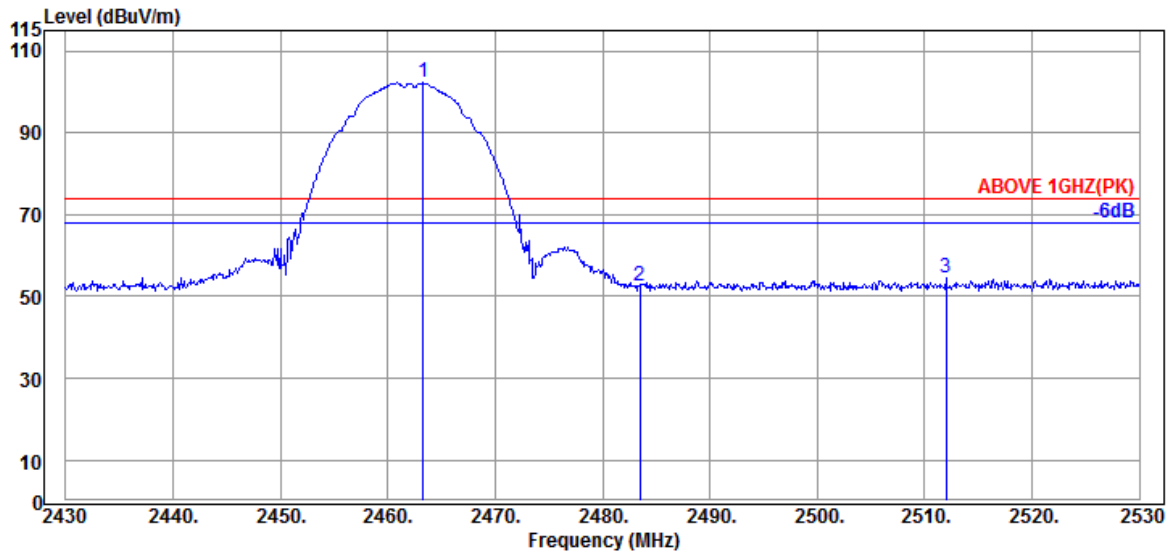

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	32.17	5.84	34.52	98.85	102.34	---	---	Peak
2483.500	32.43	5.87	34.53	48.70	52.47	74.00	21.53	Peak
2512.000	32.54	5.93	34.53	50.41	54.35	74.00	19.65	Peak

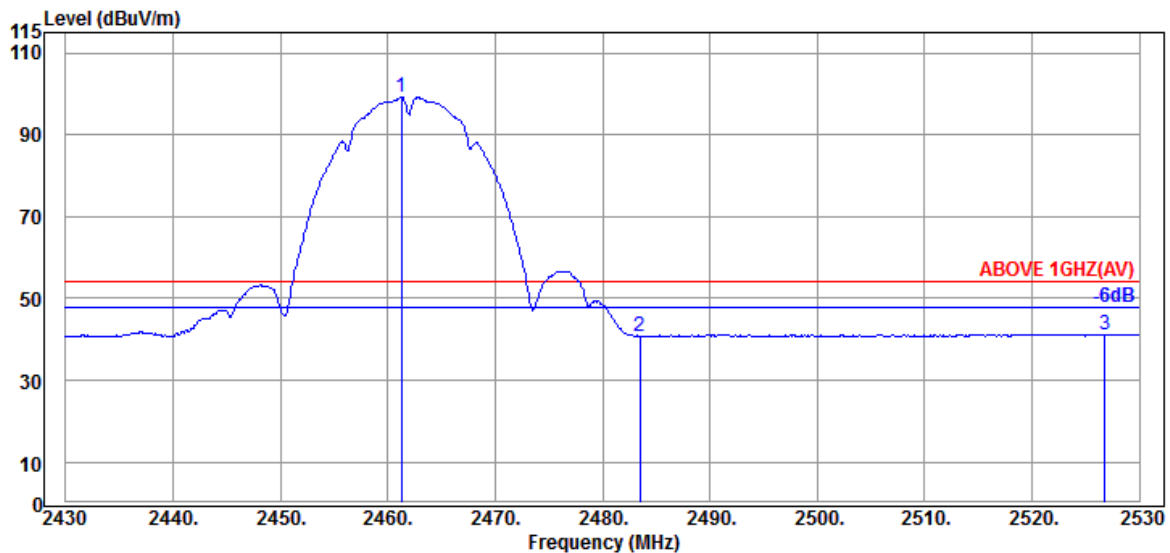


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	32.17	5.84	34.52	95.72	99.21	---	---	Average
2483.500	32.43	5.87	34.53	36.94	40.71	54.00	13.29	Average
2526.800	32.49	5.96	34.54	37.35	41.26	54.00	12.74	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

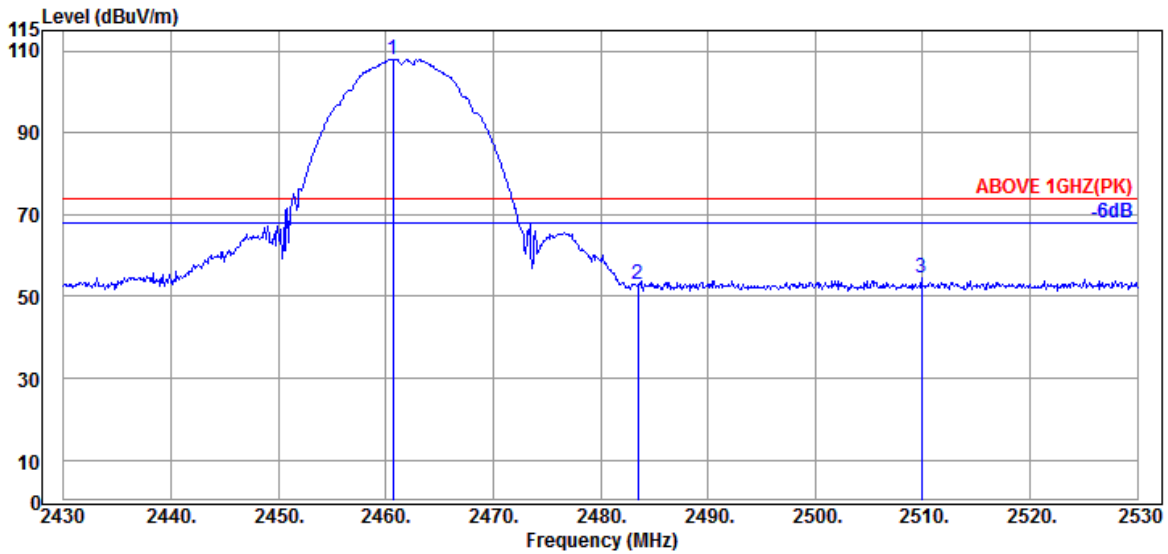

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	32.17	5.84	34.52	104.56	108.05	---	---	Peak
2483.500	32.43	5.87	34.53	49.06	52.83	74.00	21.17	Peak
2509.900	32.57	5.91	34.53	50.43	54.38	74.00	19.62	Peak

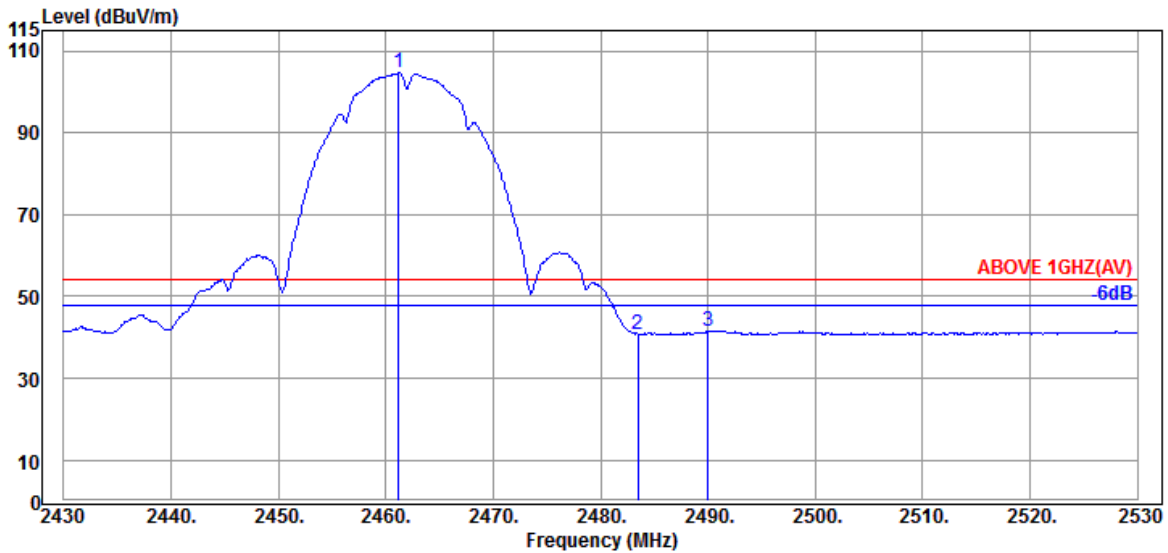


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	32.17	5.84	34.52	101.26	104.75	---	---	Average
2483.500	32.43	5.87	34.53	37.03	40.80	54.00	13.20	Average
2490.000	32.51	5.88	34.53	37.78	41.64	54.00	12.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

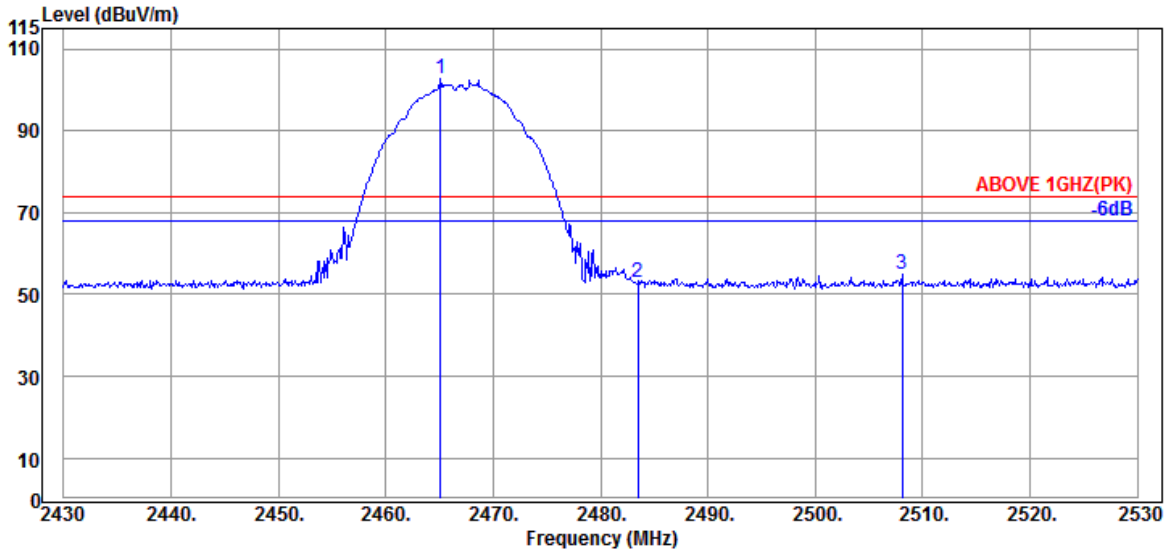

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	32.17	5.84	34.52	99.08	102.57	---	---	Peak
2483.500	32.43	5.87	34.53	49.14	52.91	74.00	21.09	Peak
2508.100	32.57	5.91	34.53	50.92	54.87	74.00	19.13	Peak

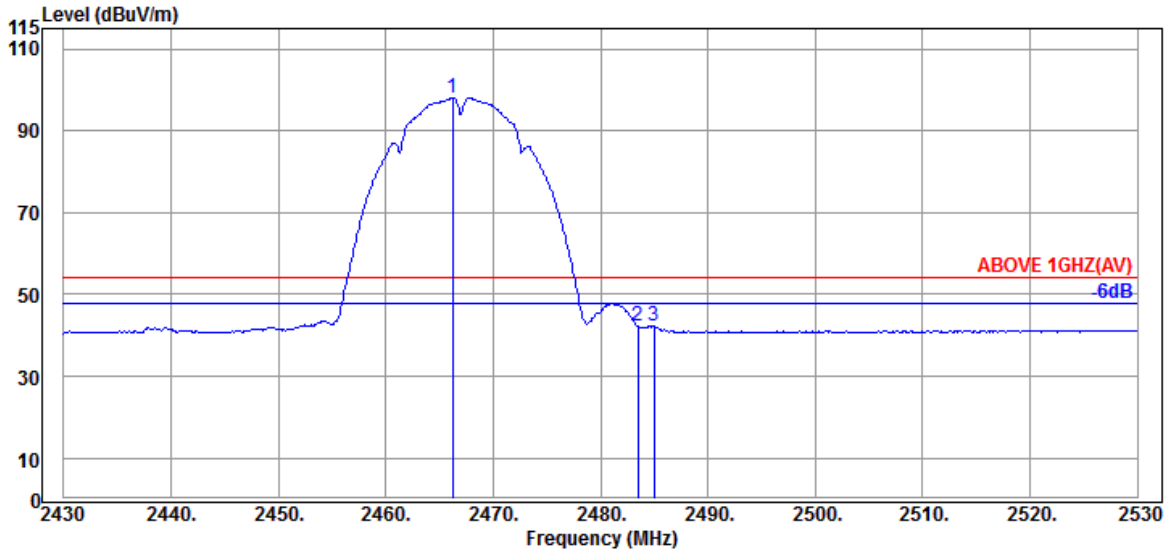


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.17	5.84	34.52	94.69	98.18	---	---	Average
2483.500	32.43	5.87	34.53	38.64	42.41	54.00	11.59	Average
2485.000	32.43	5.87	34.53	38.46	42.23	54.00	11.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

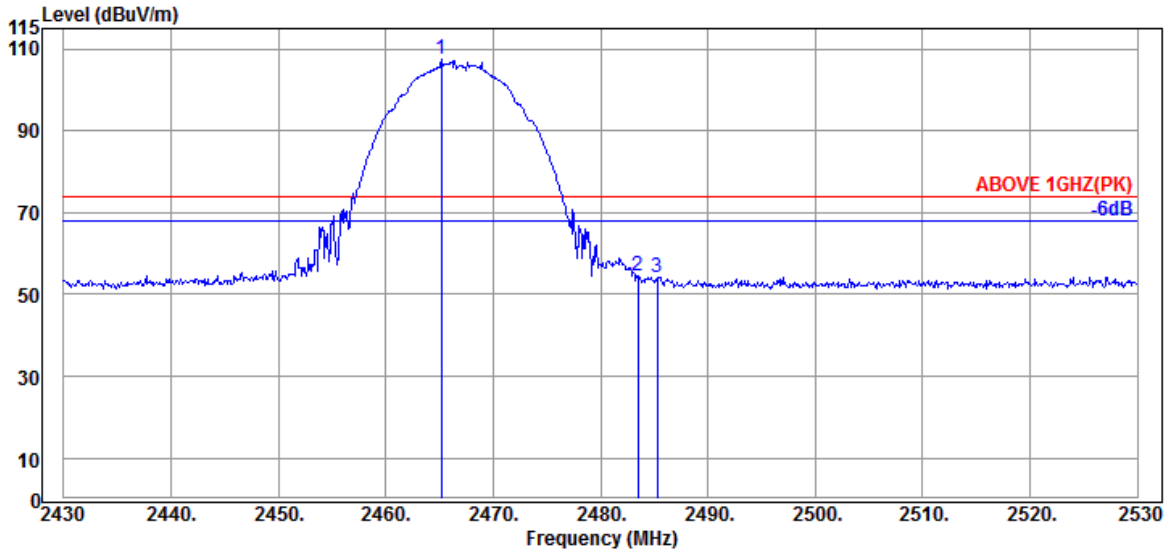

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	32.17	5.84	34.52	104.01	107.50	---	---	Peak
2483.500	32.43	5.87	34.53	50.76	54.53	74.00	19.47	Peak
2485.300	32.43	5.87	34.53	50.53	54.30	74.00	19.70	Peak

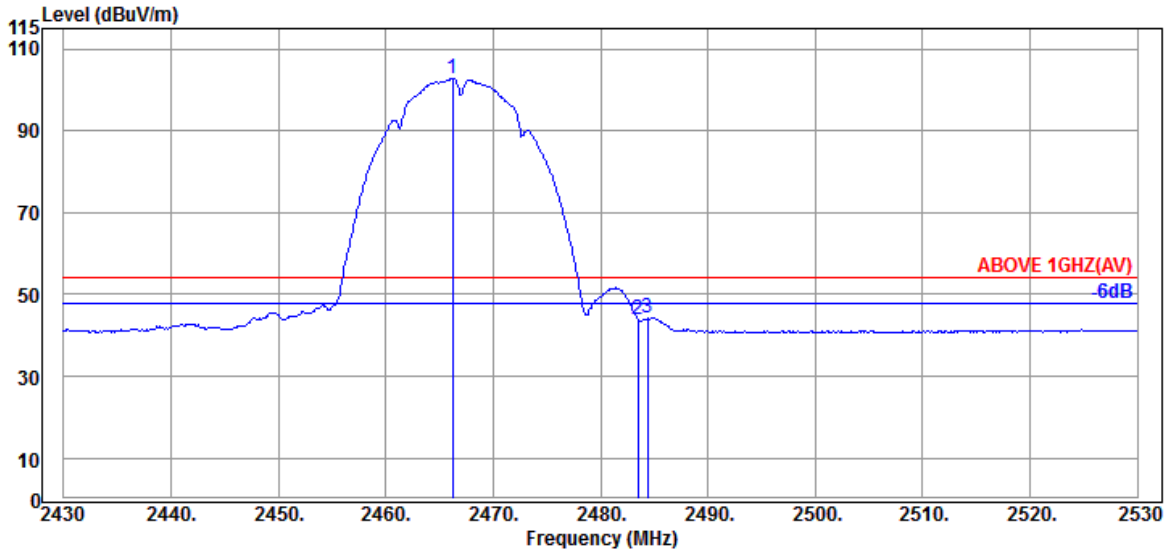


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.17	5.84	34.52	99.37	102.86	---	---	Average
2483.500	32.43	5.87	34.53	40.21	43.98	54.00	10.02	Average
2484.400	32.43	5.87	34.53	40.49	44.26	54.00	9.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

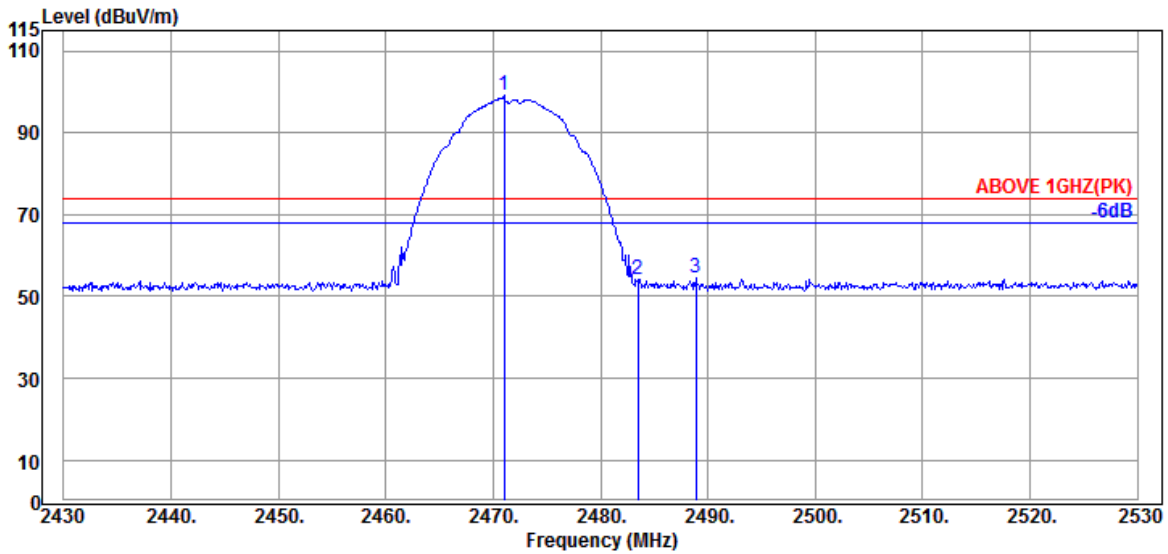

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	32.26	5.85	34.52	95.80	99.39	---	---	Peak
2483.500	32.43	5.87	34.53	50.21	53.98	74.00	20.02	Peak
2488.900	32.43	5.87	34.53	50.65	54.42	74.00	19.58	Peak

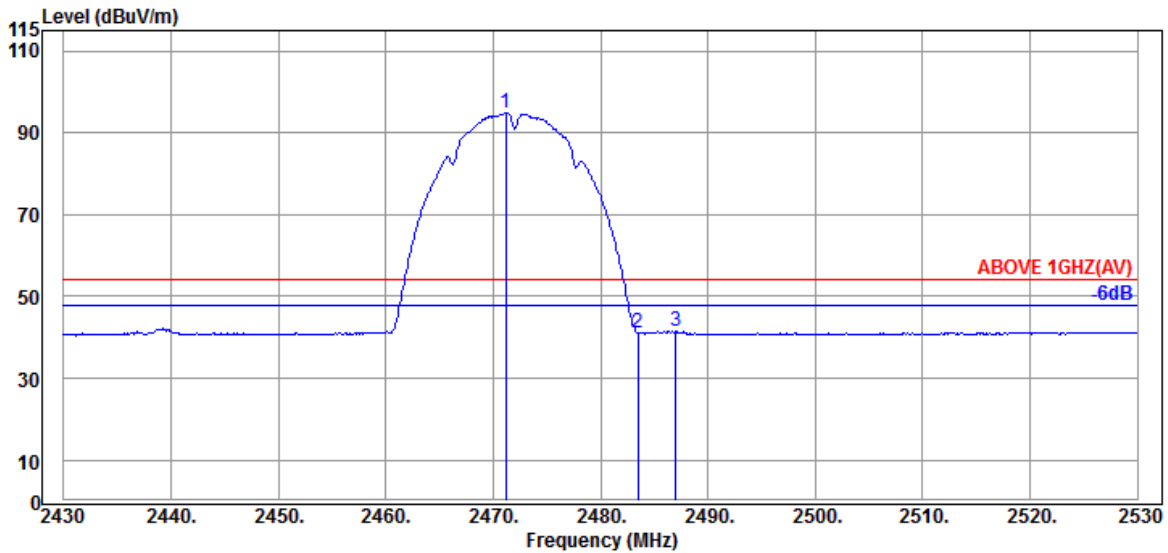


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	32.26	5.85	34.52	91.42	95.01	---	---	Average
2483.500	32.43	5.87	34.53	37.34	41.11	54.00	12.89	Average
2487.000	32.43	5.87	34.53	37.82	41.59	54.00	12.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

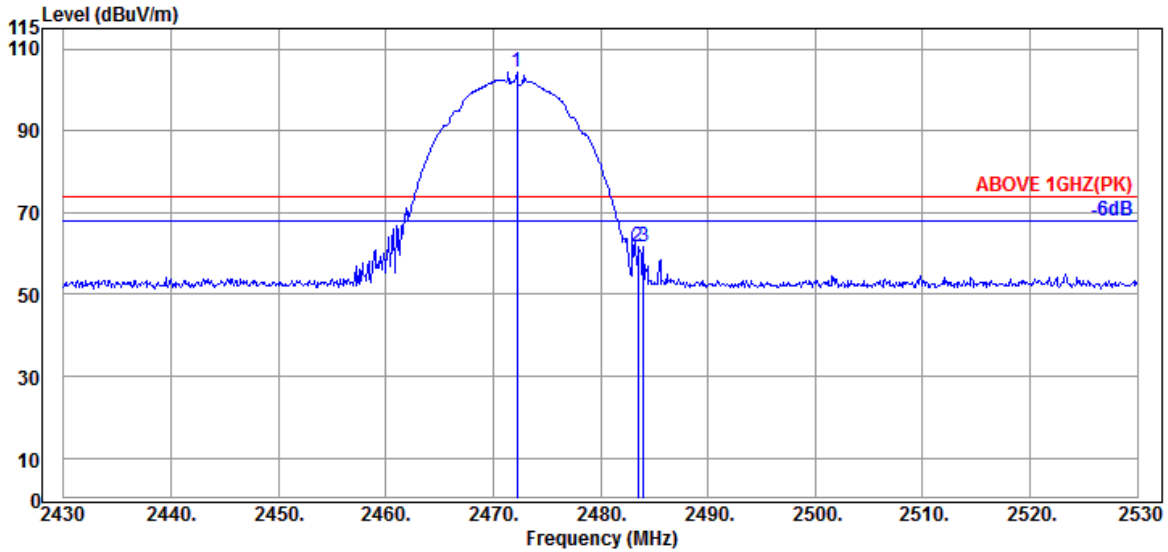

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.200	32.26	5.85	34.52	100.80	104.39	---	---	Peak
2483.500	32.43	5.87	34.53	57.91	61.68	74.00	12.32	Peak
2484.000	32.43	5.87	34.53	57.98	61.75	74.00	12.25	Peak

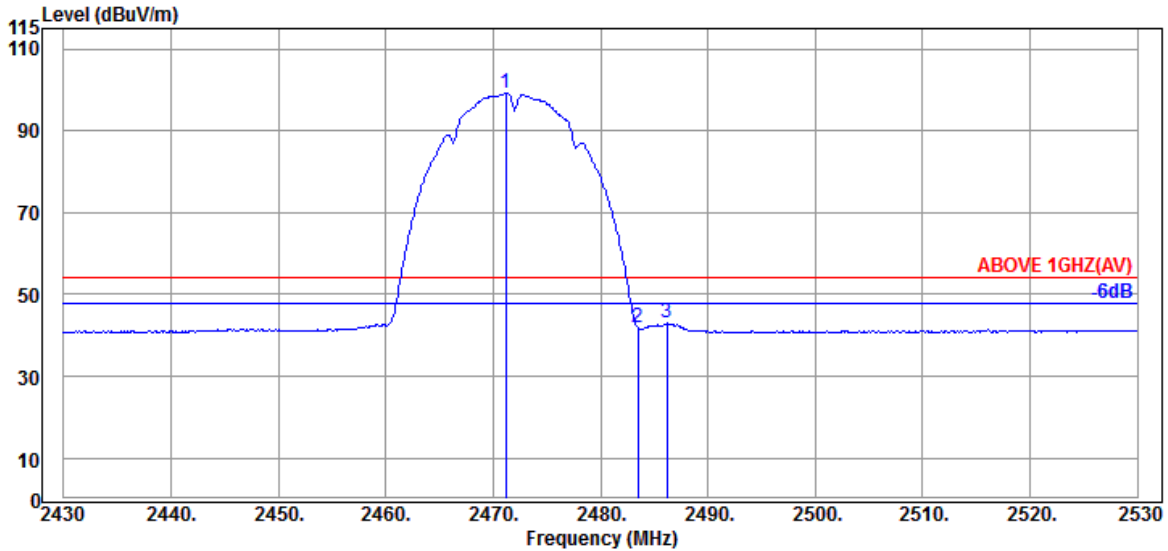


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	32.26	5.85	34.52	95.69	99.28	---	---	Average
2483.500	32.43	5.87	34.53	38.23	42.00	54.00	12.00	Average
2486.200	32.43	5.87	34.53	39.19	42.96	54.00	11.04	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

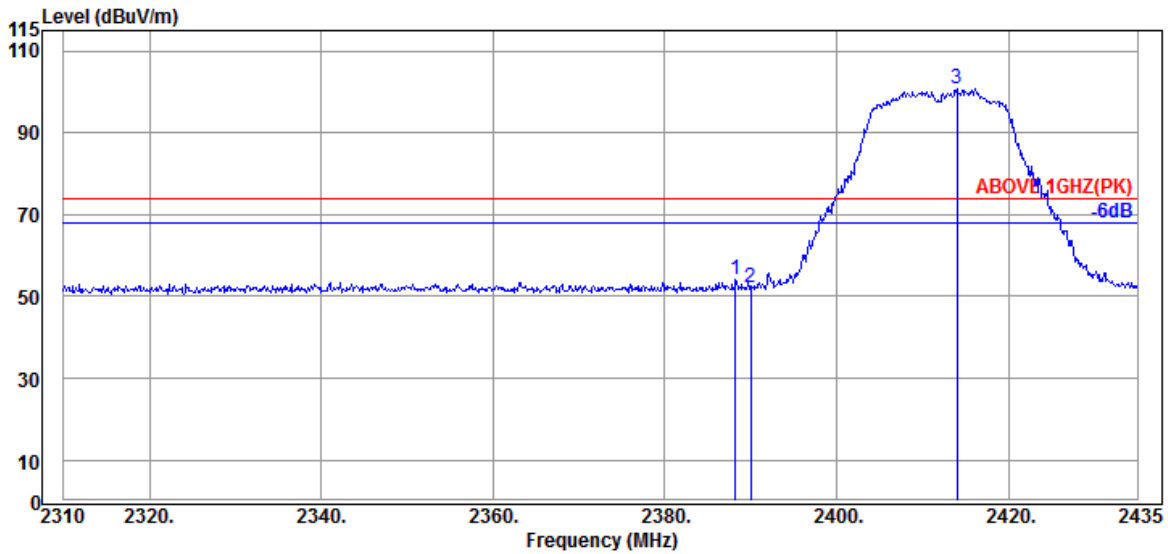

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.250	32.00	5.72	34.51	51.11	54.32	74.00	19.68	Peak
2390.000	32.00	5.72	34.51	49.09	52.30	74.00	21.70	Peak
@ 2414.000	32.00	5.76	34.51	97.47	100.72	---	---	Peak

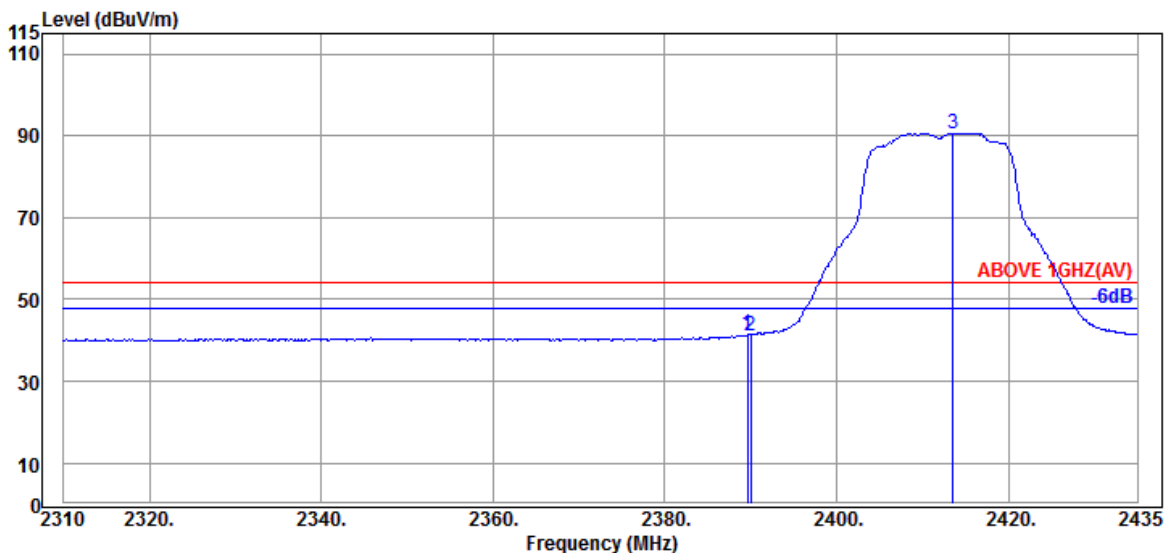


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	32.00	5.72	34.51	38.15	41.36	54.00	12.64	Average
2390.000	32.00	5.72	34.51	38.04	41.25	54.00	12.75	Average
@ 2413.500	32.00	5.76	34.51	87.42	90.67	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

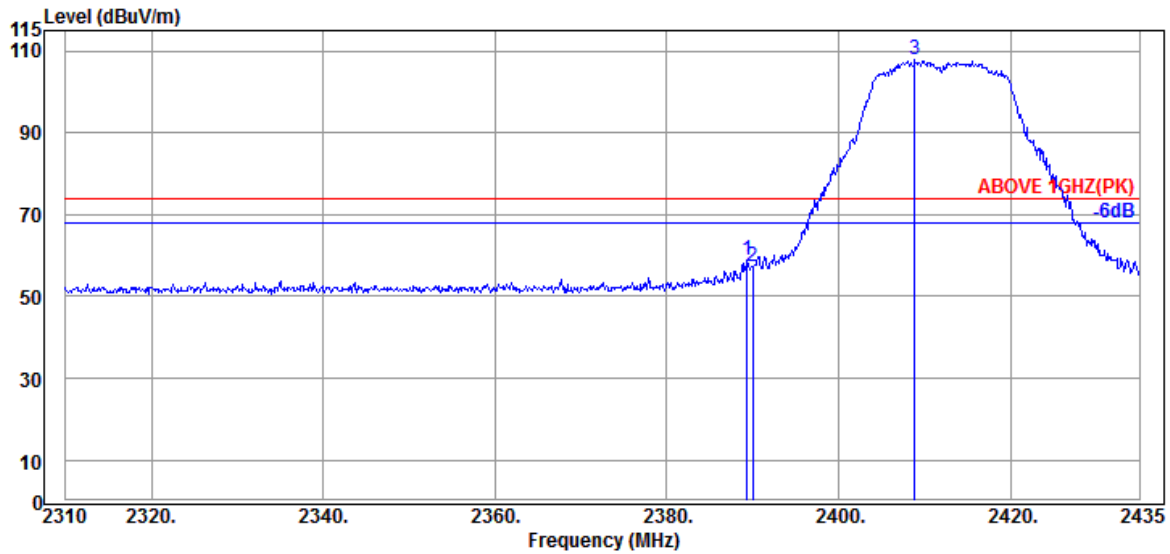

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	32.00	5.72	34.51	55.56	58.77	74.00	15.23	Peak
2390.000	32.00	5.72	34.51	54.24	57.45	74.00	16.55	Peak
@ 2408.875	32.00	5.75	34.51	104.62	107.86	---	---	Peak

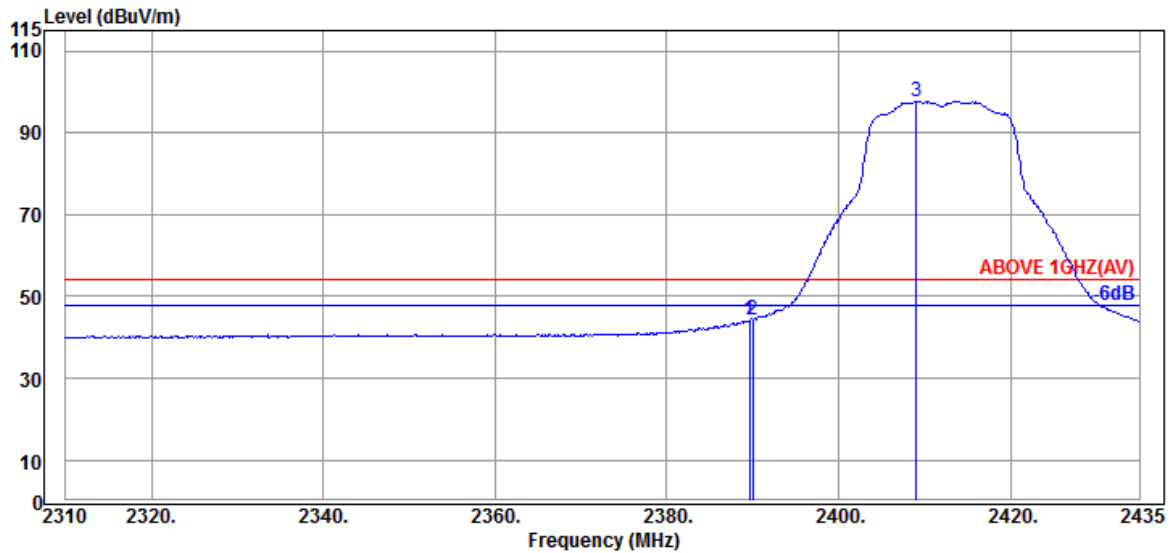


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	32.00	5.72	34.51	40.98	44.19	54.00	9.81	Average
2390.000	32.00	5.72	34.51	40.94	44.15	54.00	9.85	Average
@ 2409.000	32.00	5.75	34.51	94.41	97.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

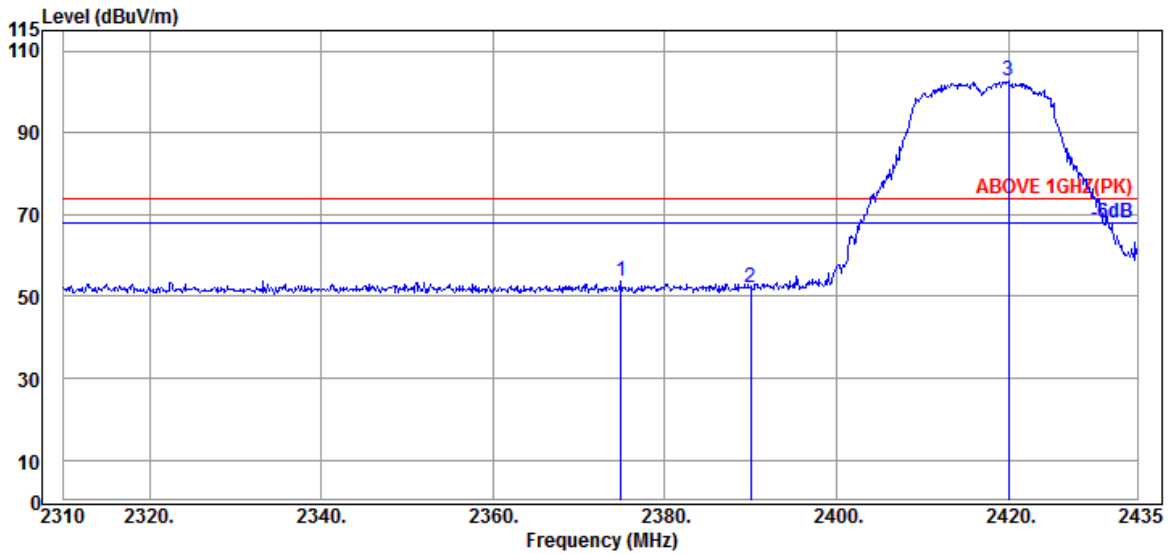

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.875	32.00	5.70	34.50	50.43	53.63	74.00	20.37	Peak
2390.000	32.00	5.72	34.51	49.08	52.29	74.00	21.71	Peak
@ 2420.000	32.00	5.77	34.51	99.36	102.62	---	---	Peak

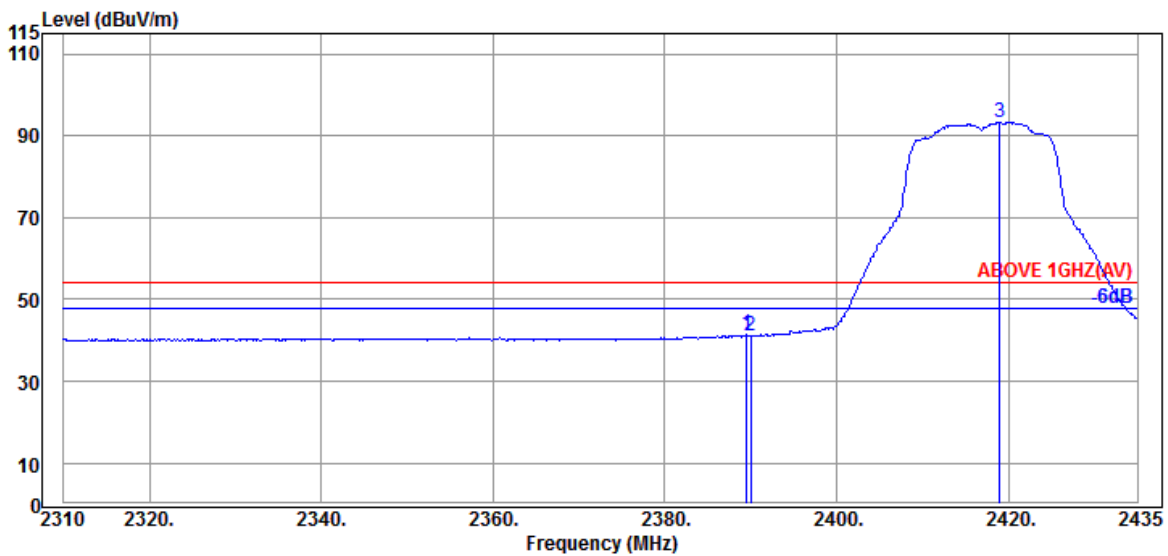


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	38.27	41.48	54.00	12.52	Average
2390.000	32.00	5.72	34.51	37.91	41.12	54.00	12.88	Average
@ 2419.000	32.00	5.77	34.51	90.02	93.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

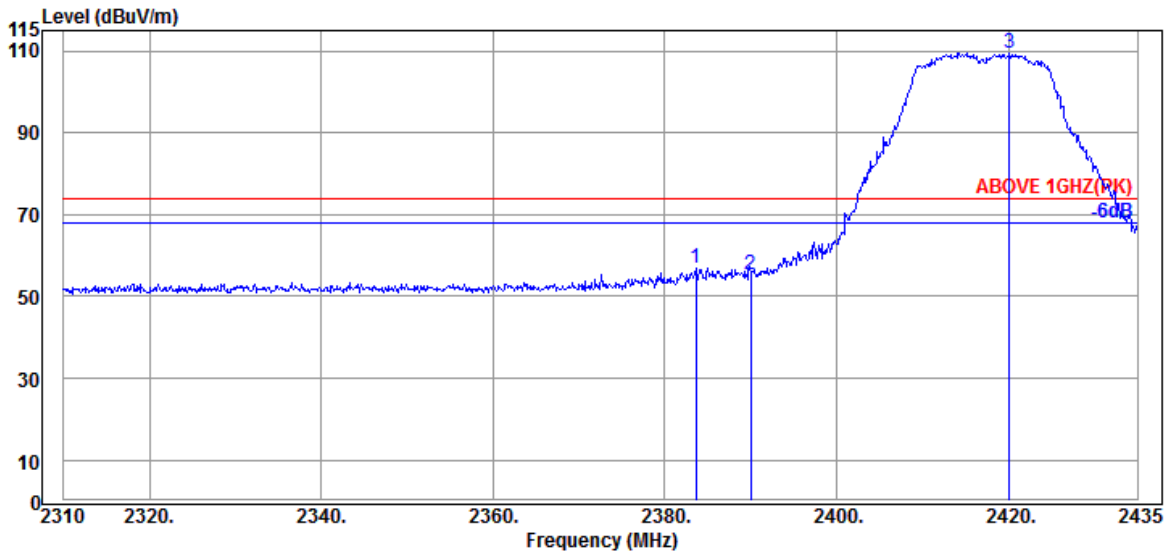

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2383.625	32.00	5.72	34.51	53.79	57.00	74.00	17.00	Peak
2390.000	32.00	5.72	34.51	51.97	55.18	74.00	18.82	Peak
@ 2420.125	32.00	5.77	34.51	106.31	109.57	---	---	Peak


Antenna at Vertical Polarization

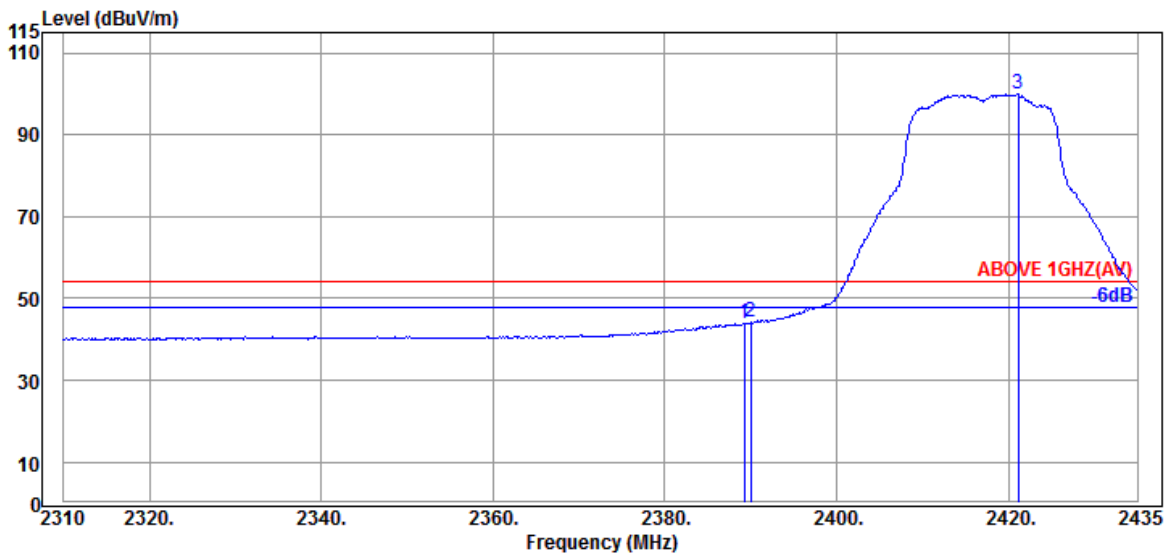

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.250	32.00	5.72	34.51	40.62	43.83	54.00	10.17	Average
2390.000	32.00	5.72	34.51	40.95	44.16	54.00	9.84	Average
@ 2421.125	32.00	5.77	34.51	96.63	99.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

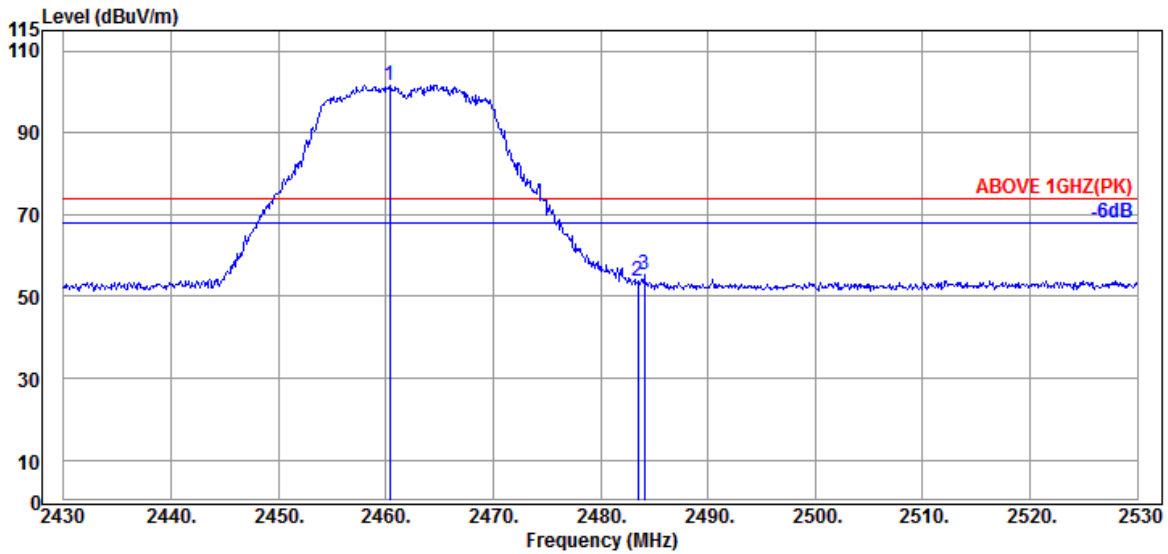

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	32.09	5.83	34.52	98.16	101.56	---	---	Peak
2483.500	32.43	5.87	34.53	49.98	53.75	74.00	20.25	Peak
2484.100	32.43	5.87	34.53	51.63	55.40	74.00	18.60	Peak

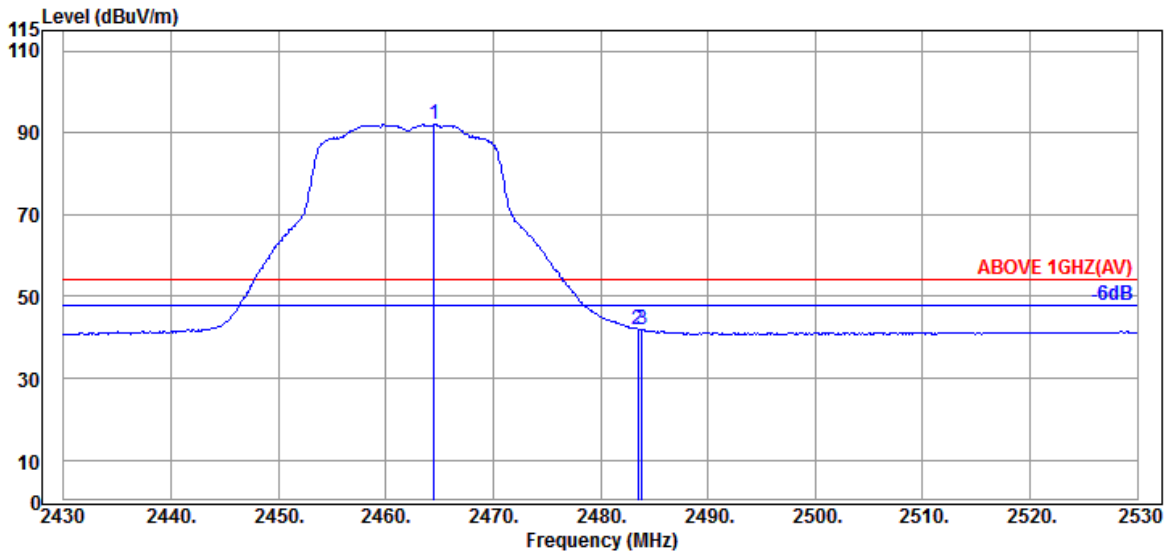


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	32.17	5.84	34.52	88.53	92.02	---	---	Average
2483.500	32.43	5.87	34.53	38.18	41.95	54.00	12.05	Average
2483.900	32.43	5.87	34.53	38.08	41.85	54.00	12.15	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

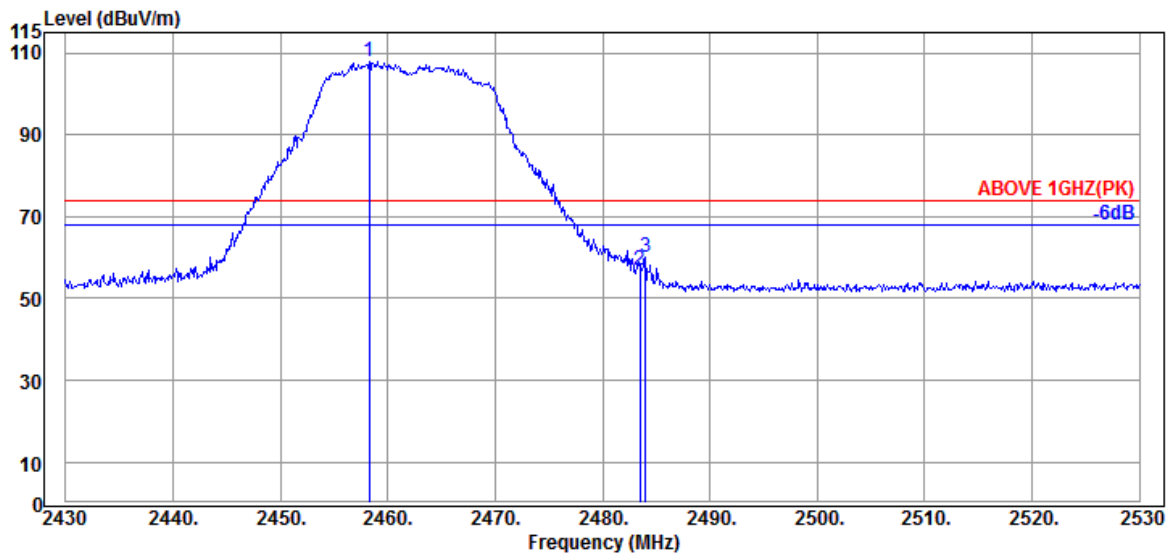

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	32.09	5.83	34.52	104.35	107.75	---	---	Peak
2483.500	32.43	5.87	34.53	53.15	56.92	74.00	17.08	Peak
2484.000	32.43	5.87	34.53	56.27	60.04	74.00	13.96	Peak

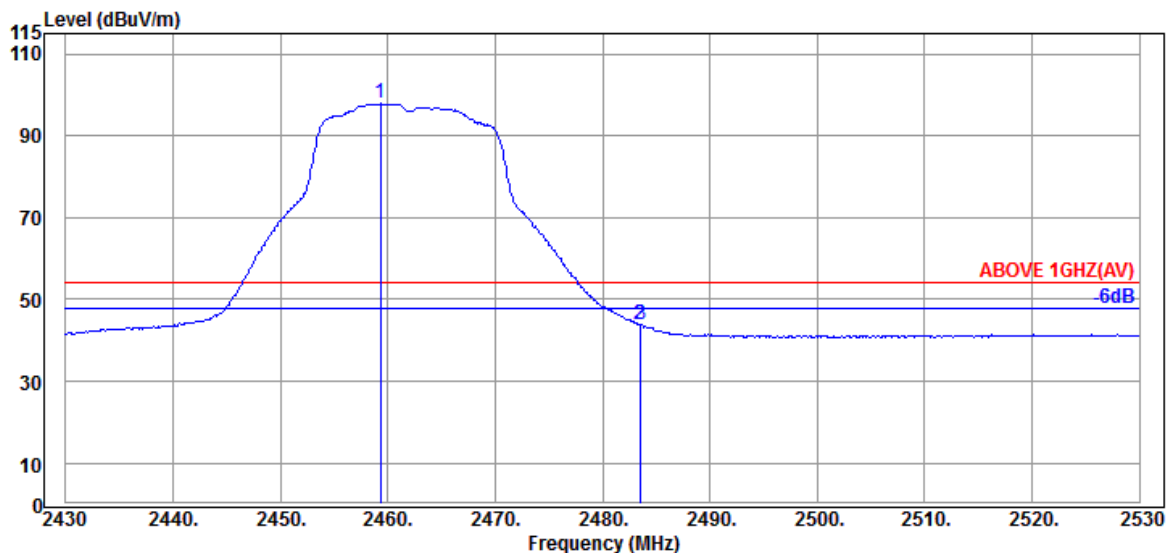


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	32.09	5.83	34.52	94.46	97.86	---	---	Average
2483.500	32.43	5.87	34.53	40.07	43.84	54.00	10.16	Average
2483.600	32.43	5.87	34.53	40.04	43.81	54.00	10.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

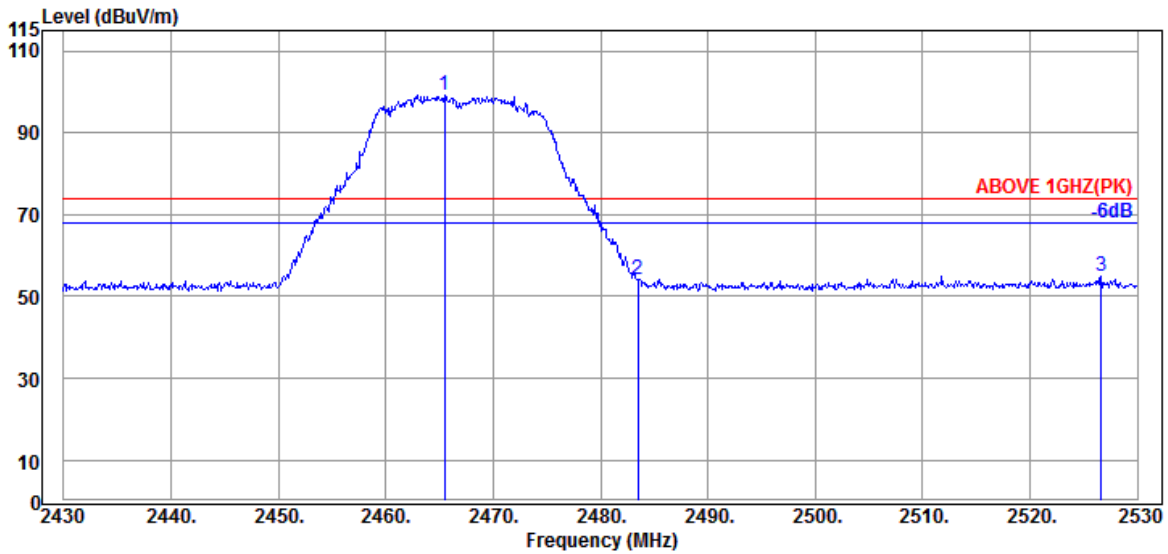

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.500	32.17	5.84	34.52	95.84	99.33	---	---	Peak
2483.500	32.43	5.87	34.53	50.30	54.07	74.00	19.93	Peak
2526.600	32.49	5.96	34.54	51.10	55.01	74.00	18.99	Peak

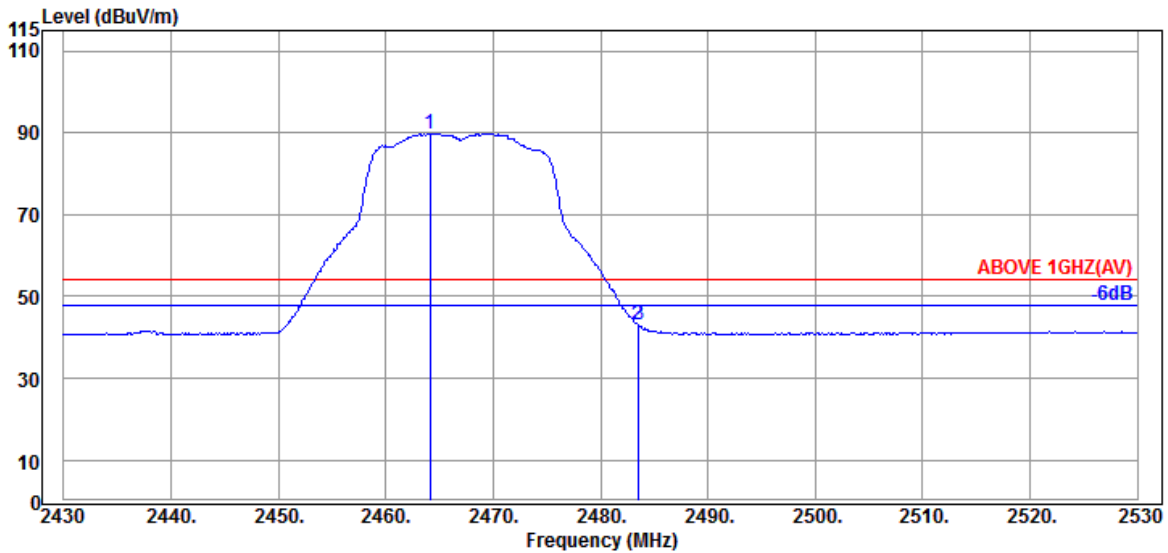


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.100	32.17	5.84	34.52	86.41	89.90	---	---	Average
2483.500	32.43	5.87	34.53	39.49	43.26	54.00	10.74	Average
2483.600	32.43	5.87	34.53	39.30	43.07	54.00	10.93	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

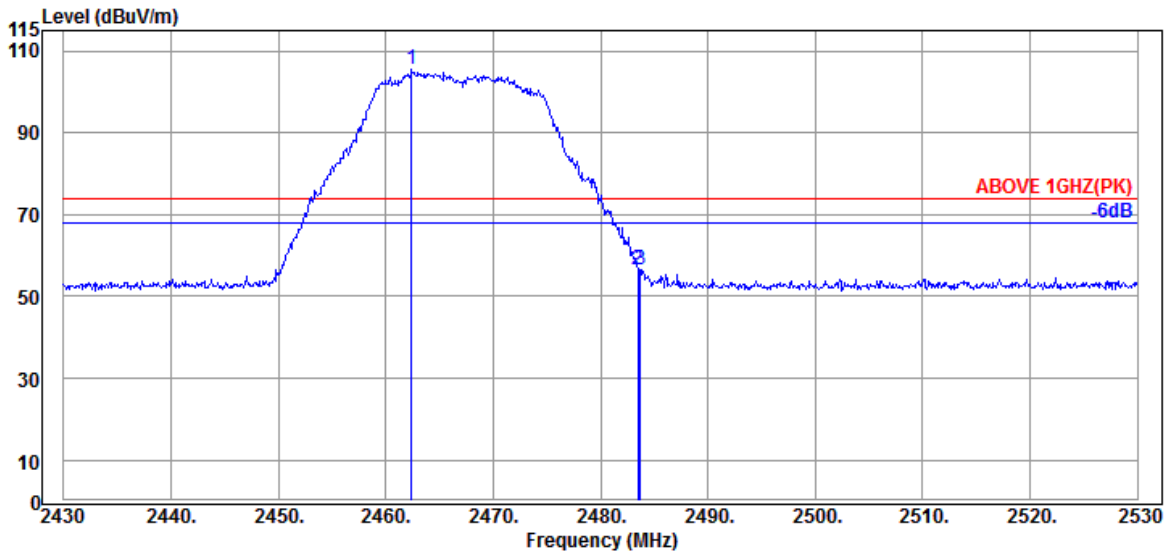

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.400	32.17	5.84	34.52	101.87	105.36	---	---	Peak
2483.500	32.43	5.87	34.53	52.85	56.62	74.00	17.38	Peak
2483.700	32.43	5.87	34.53	52.60	56.37	74.00	17.63	Peak

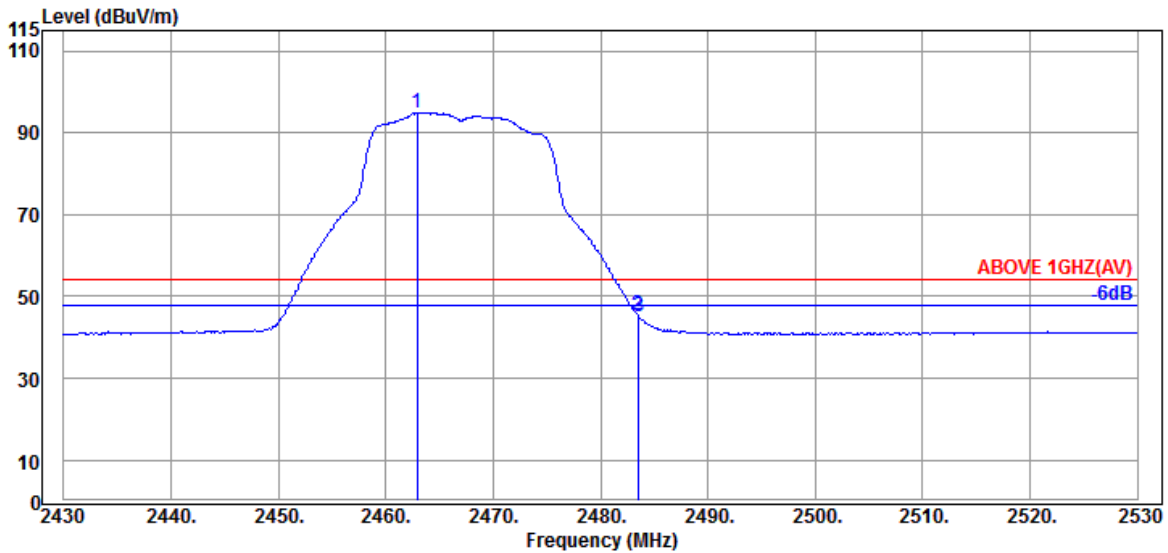


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.900	32.17	5.84	34.52	91.51	95.00	---	---	Average
2483.500	32.43	5.87	34.53	41.63	45.40	54.00	8.60	Average
2483.600	32.43	5.87	34.53	41.48	45.25	54.00	8.75	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

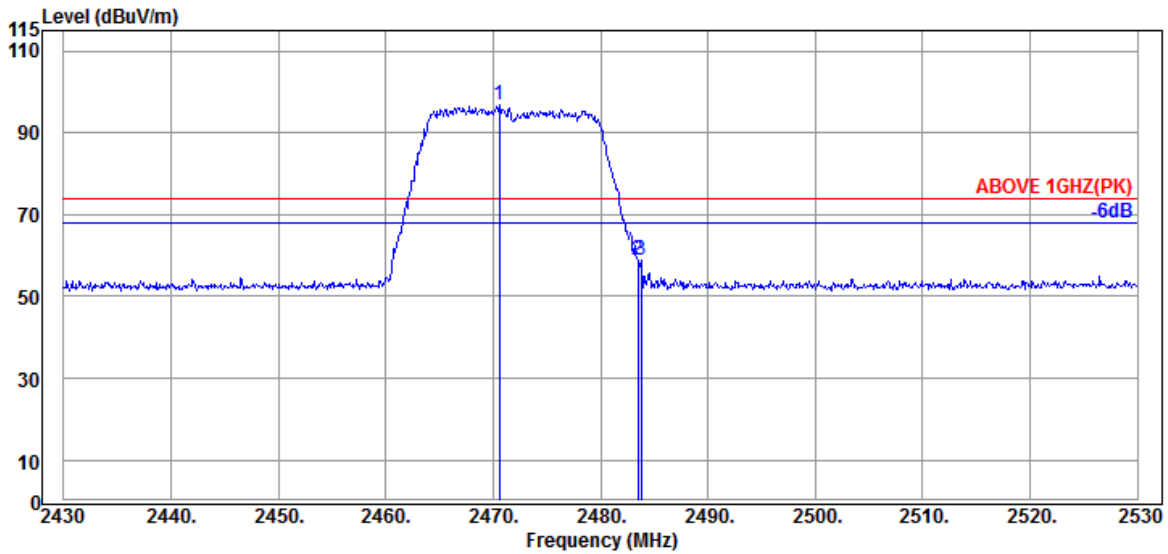

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.600	32.26	5.85	34.52	93.28	96.87	---	---	Peak
2483.500	32.43	5.87	34.53	55.11	58.88	74.00	15.12	Peak
2483.800	32.43	5.87	34.53	54.97	58.74	74.00	15.26	Peak

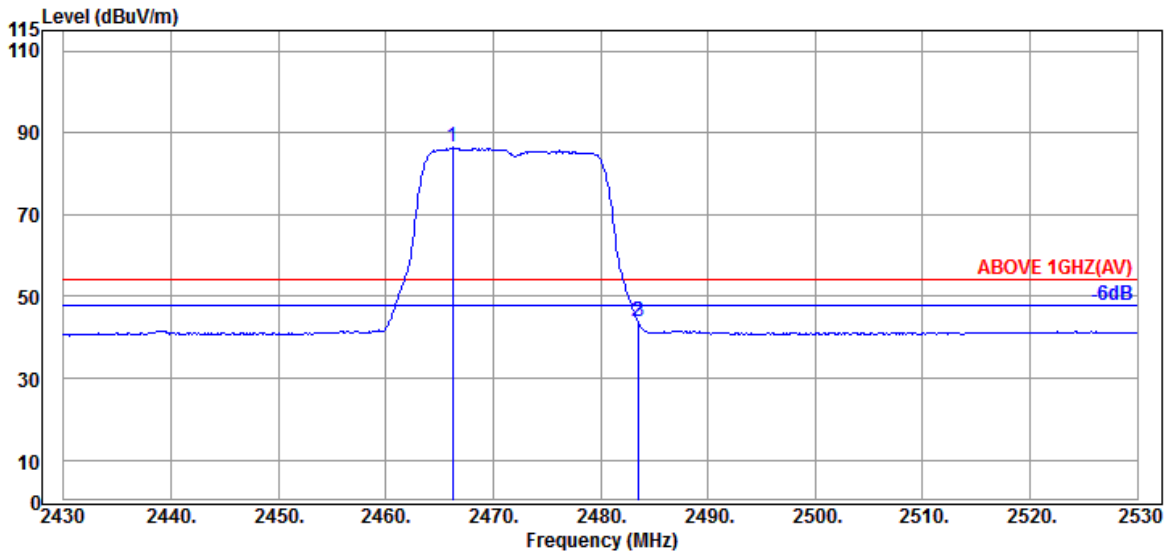


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	32.17	5.84	34.52	82.93	86.42	---	---	Average
2483.500	32.43	5.87	34.53	40.03	43.80	54.00	10.20	Average
2483.600	32.43	5.87	34.53	40.00	43.77	54.00	10.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

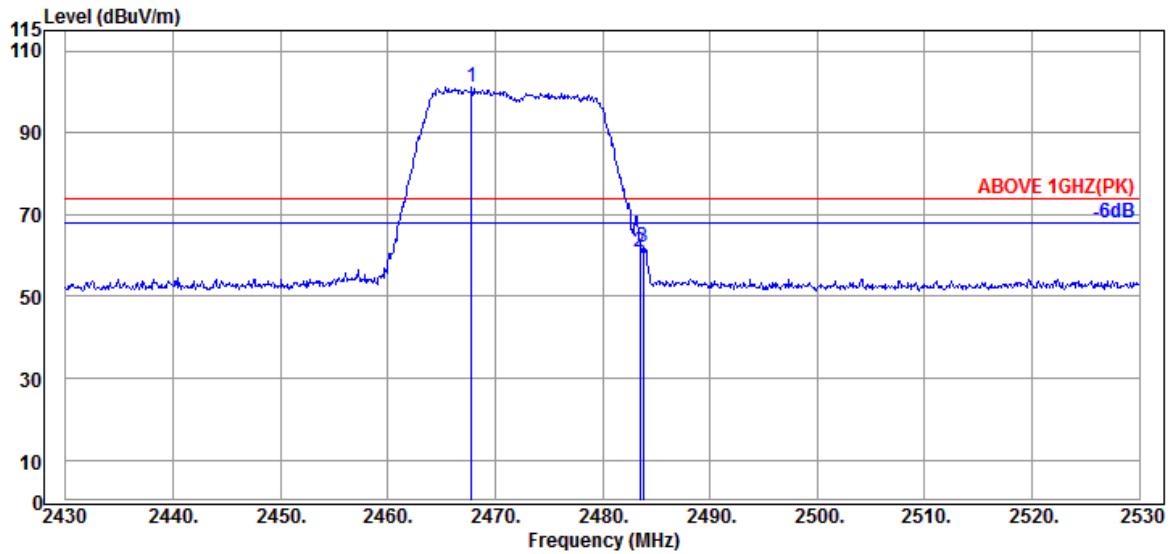

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.800	32.26	5.85	34.52	97.56	101.15	---	---	Peak
2483.500	32.43	5.87	34.53	57.26	61.03	74.00	12.97	Peak
2483.800	32.43	5.87	34.53	58.16	61.93	74.00	12.07	Peak

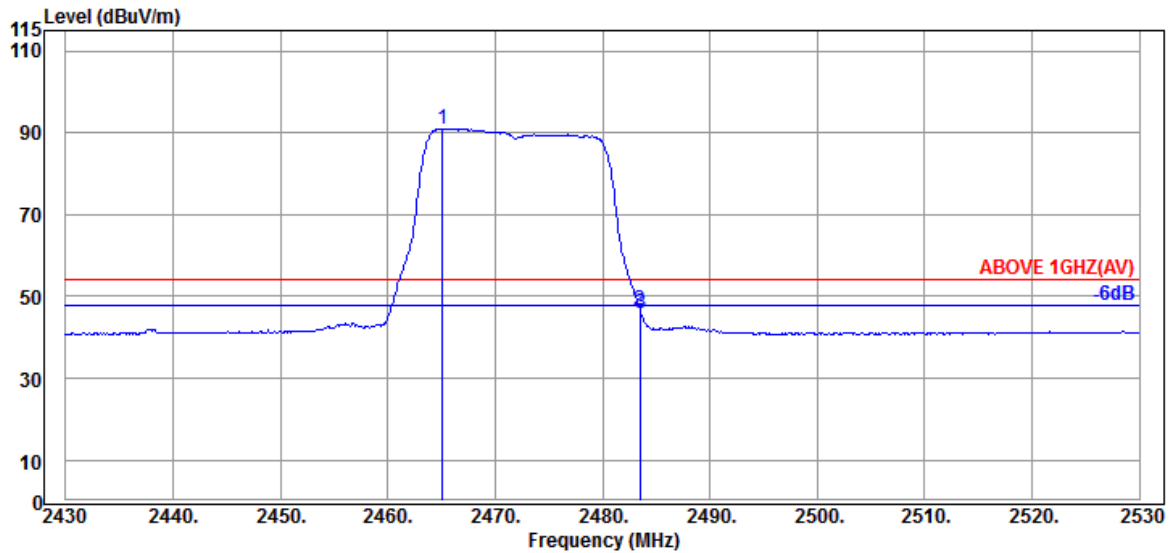


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	32.17	5.84	34.52	87.54	91.03	---	---	Average
2483.500	32.43	5.87	34.53	43.05	46.82	54.00	7.18	Average
2483.600	32.43	5.87	34.53	42.10	45.87	54.00	8.13	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

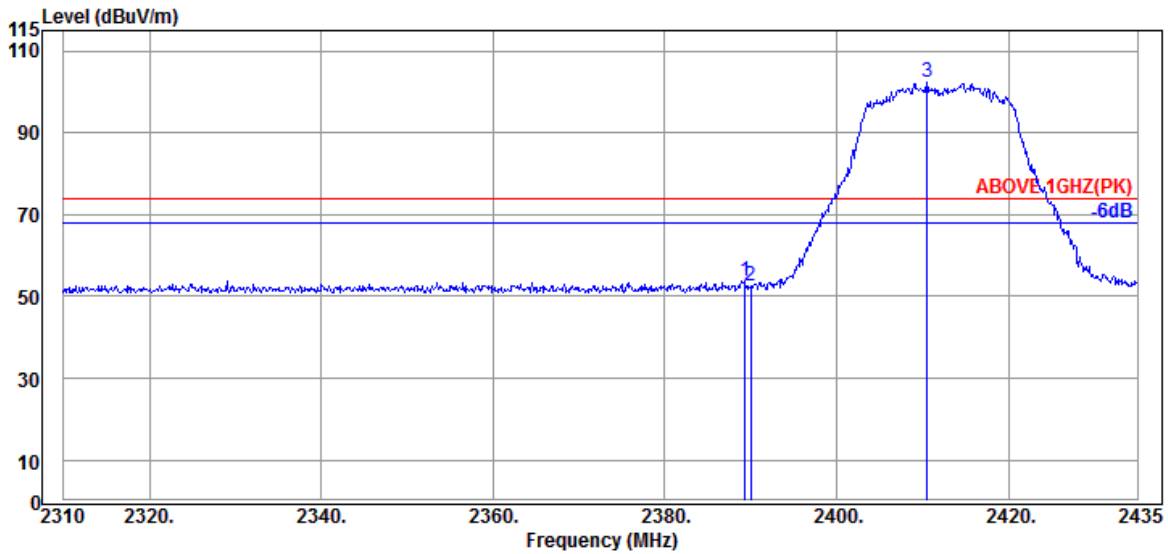

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	32.00	5.72	34.51	50.64	53.85	74.00	20.15	Peak
2390.000	32.00	5.72	34.51	49.23	52.44	74.00	21.56	Peak
@ 2410.500	32.00	5.75	34.51	99.02	102.26	---	---	Peak

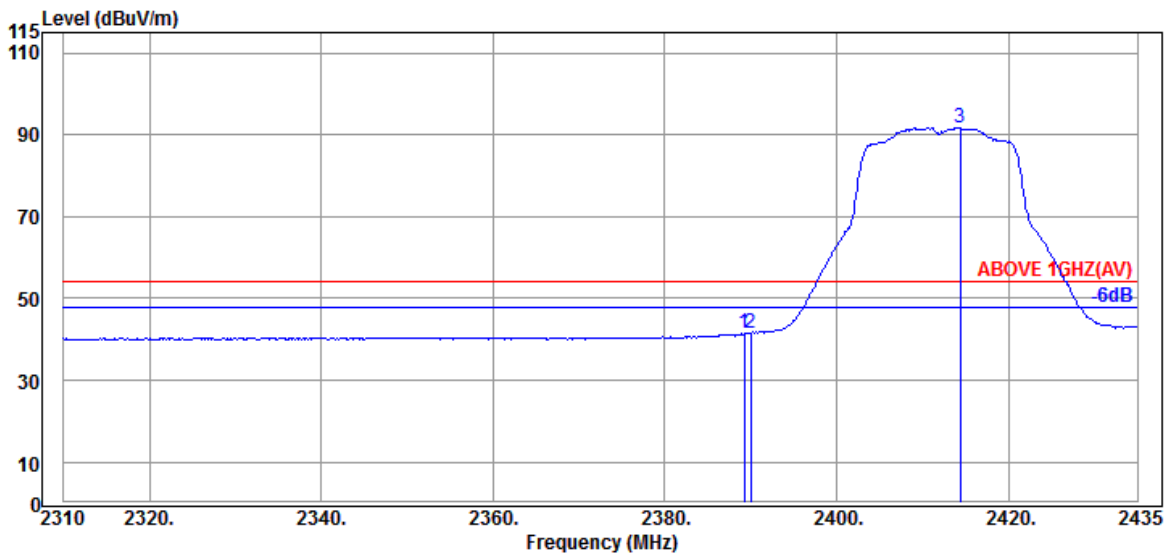


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	32.00	5.72	34.51	38.23	41.44	54.00	12.56	Average
2390.000	32.00	5.72	34.51	38.10	41.31	54.00	12.69	Average
@ 2414.375	32.00	5.76	34.51	88.55	91.80	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

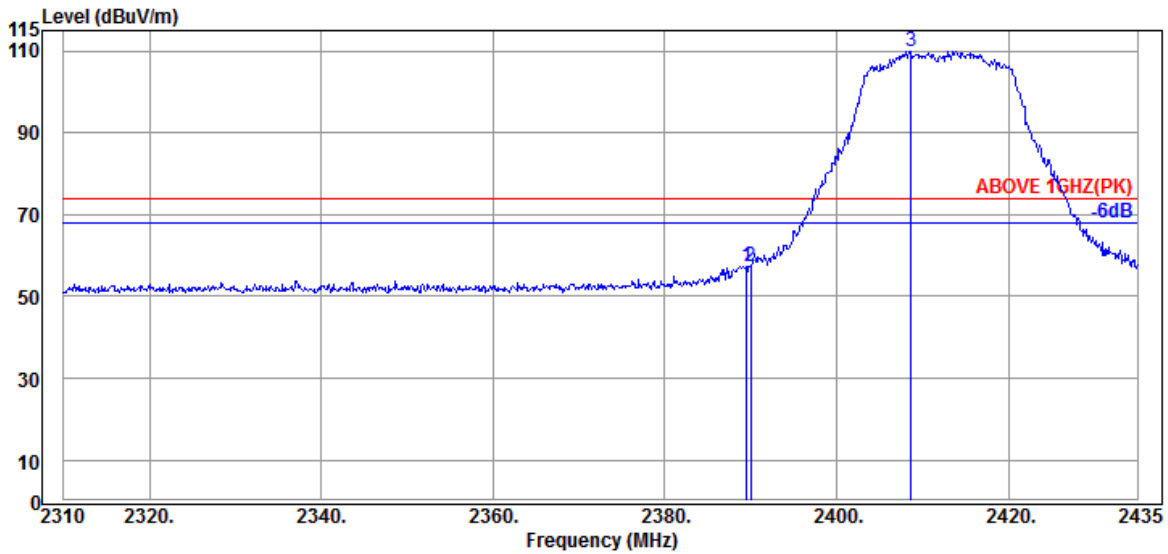

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	54.17	57.38	74.00	16.62	Peak
2390.000	32.00	5.72	34.51	54.27	57.48	74.00	16.52	Peak
@ 2408.625	32.00	5.75	34.51	106.71	109.95	---	---	Peak

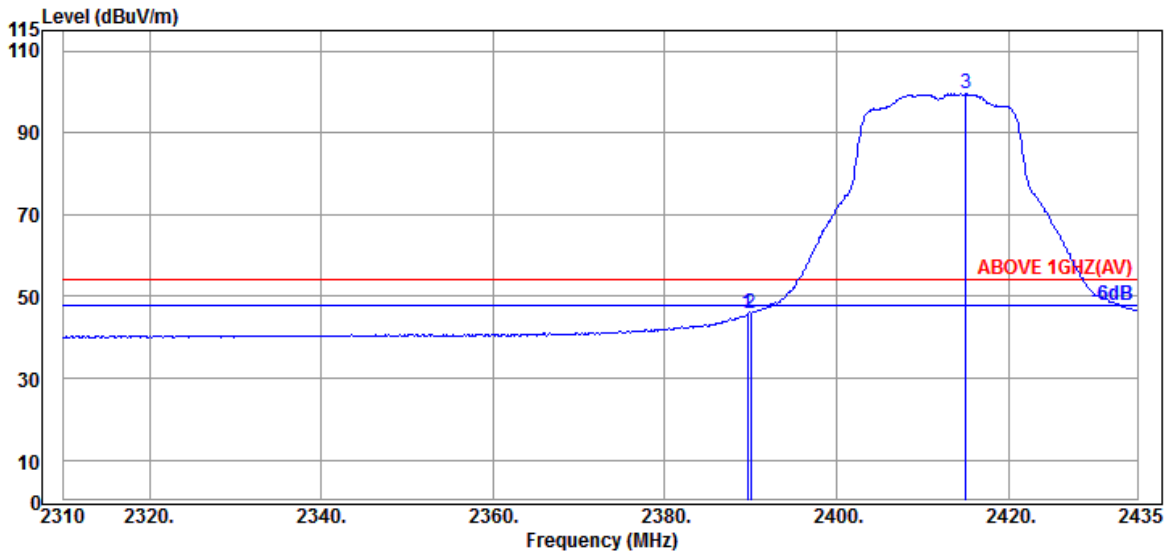


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	32.00	5.72	34.51	42.50	45.71	54.00	8.29	Average
2390.000	32.00	5.72	34.51	42.75	45.96	54.00	8.04	Average
@ 2415.000	32.00	5.76	34.51	96.25	99.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

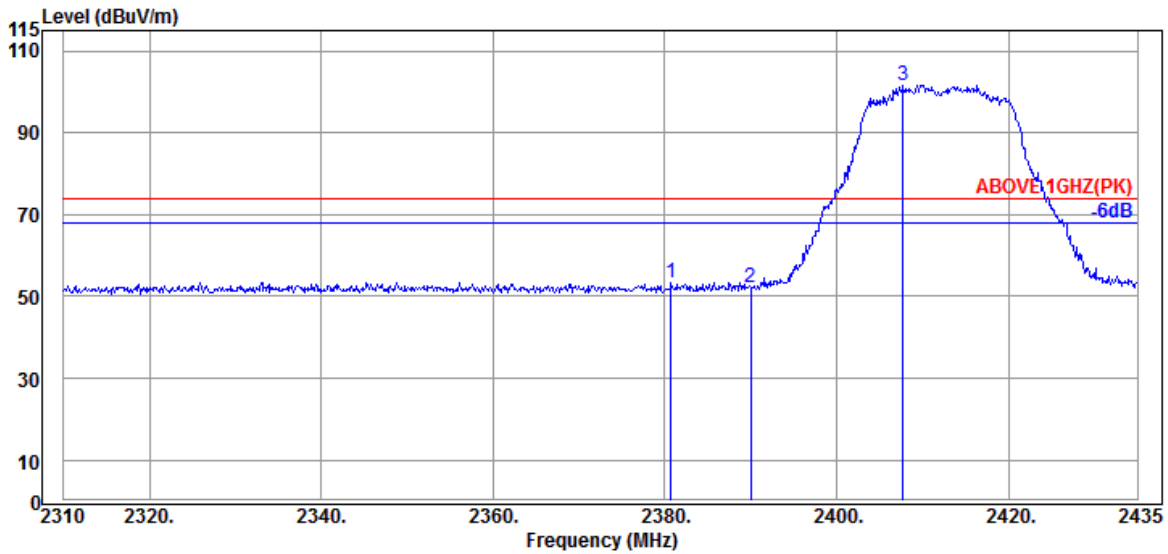

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.750	32.00	5.71	34.51	50.27	53.47	74.00	20.53	Peak
2390.000	32.00	5.72	34.51	48.87	52.08	74.00	21.92	Peak
@ 2407.750	32.00	5.75	34.51	98.35	101.59	---	---	Peak

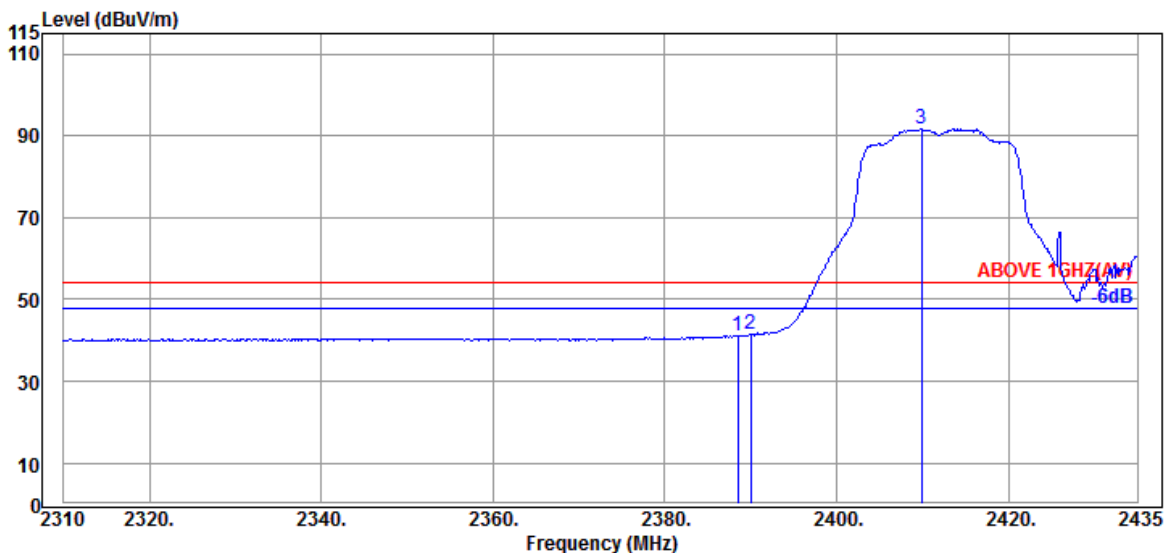


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	32.00	5.72	34.51	38.06	41.27	54.00	12.73	Average
2390.000	32.00	5.72	34.51	38.10	41.31	54.00	12.69	Average
@ 2409.875	32.00	5.75	34.51	88.41	91.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

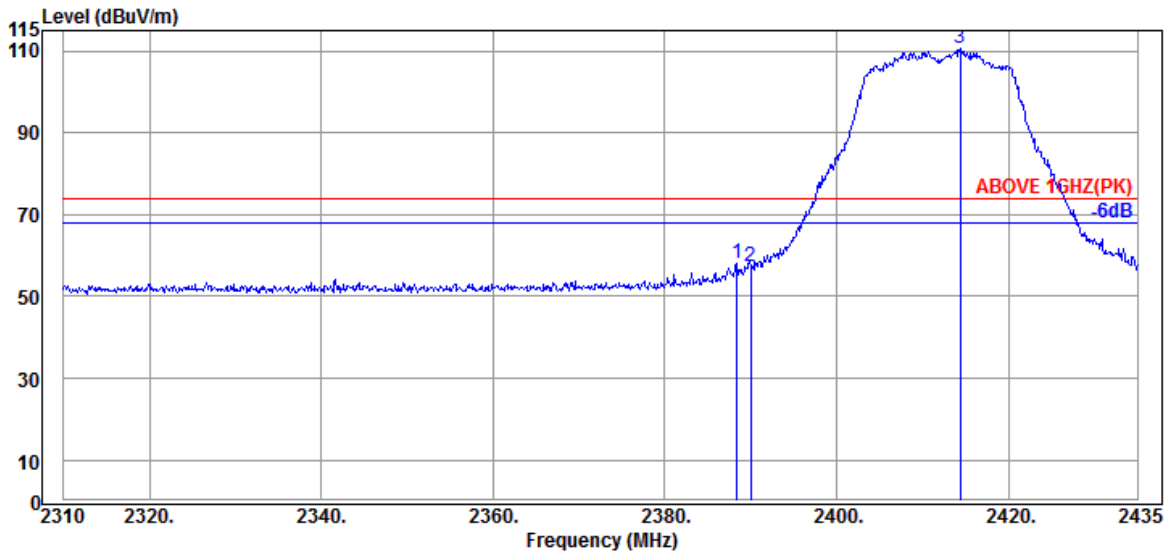

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.375	32.00	5.72	34.51	54.99	58.20	74.00	15.80	Peak
2390.000	32.00	5.72	34.51	53.91	57.12	74.00	16.88	Peak
@ 2414.375	32.00	5.76	34.51	107.23	110.48	---	---	Peak

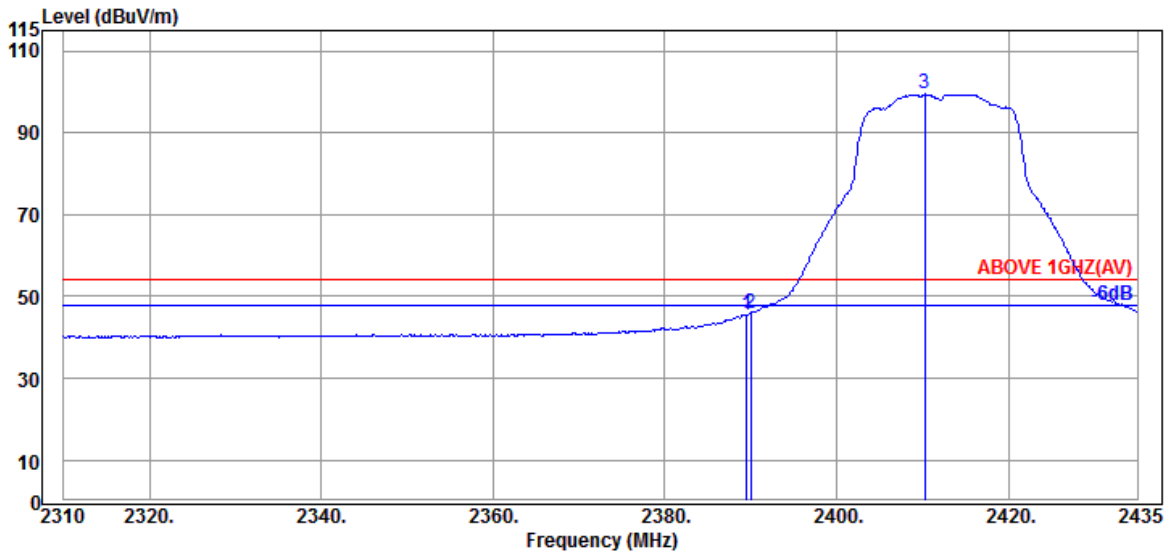


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	42.43	45.64	54.00	8.36	Average
2390.000	32.00	5.72	34.51	42.61	45.82	54.00	8.18	Average
@ 2410.250	32.00	5.75	34.51	96.15	99.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

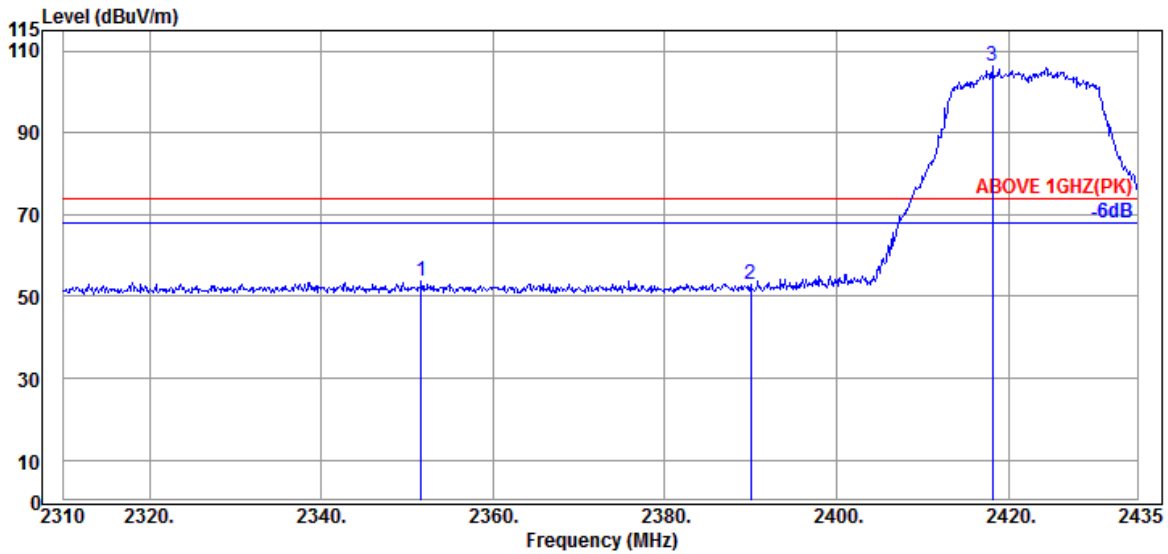

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2351.625	32.00	5.66	34.50	50.74	53.90	74.00	20.10	Peak
2390.000	32.00	5.72	34.51	49.81	53.02	74.00	20.98	Peak
@ 2418.125	32.00	5.76	34.51	102.96	106.21	---	---	Peak

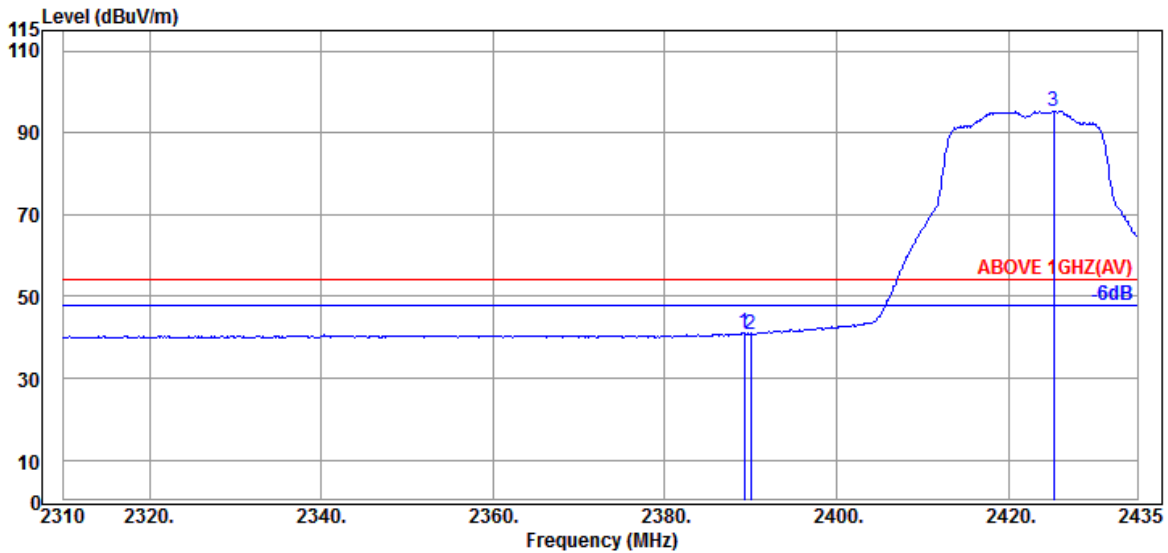


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.250	32.00	5.72	34.51	37.80	41.01	54.00	12.99	Average
2390.000	32.00	5.72	34.51	37.61	40.82	54.00	13.18	Average
@ 2425.250	32.00	5.78	34.51	92.08	95.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

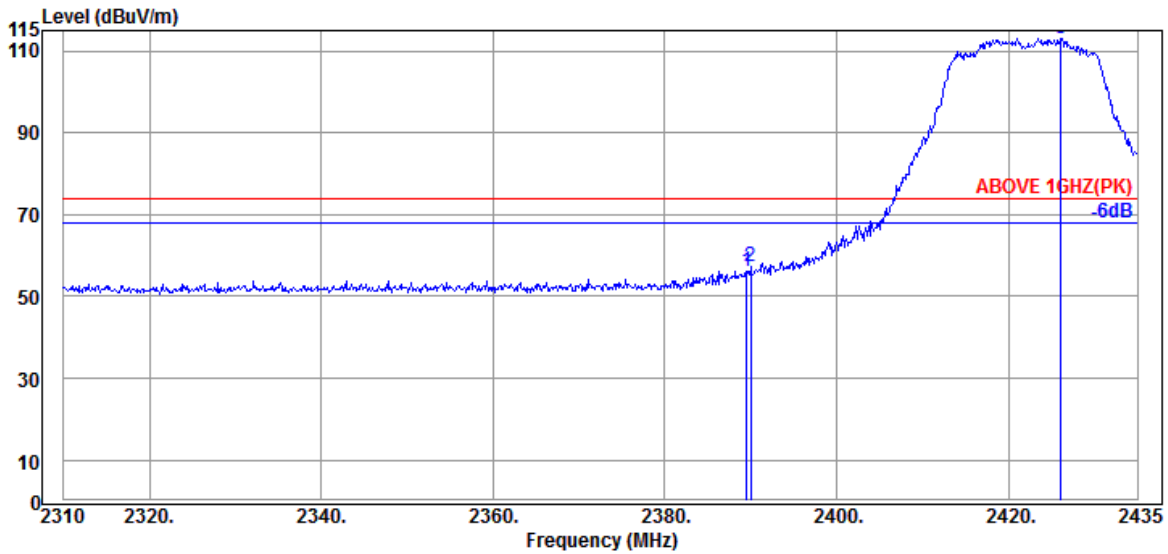

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	52.95	56.16	74.00	17.84	Peak
2390.000	32.00	5.72	34.51	53.95	57.16	74.00	16.84	Peak
@ 2426.125	32.00	5.78	34.51	109.86	113.13	---	---	Peak

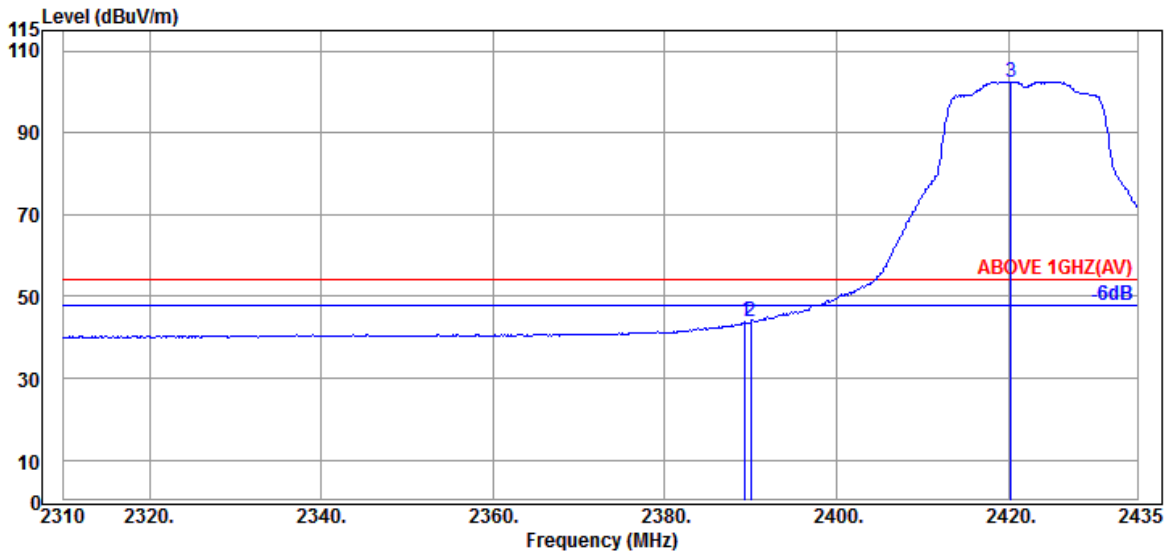


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	32.00	5.72	34.51	40.47	43.68	54.00	10.32	Average
2390.000	32.00	5.72	34.51	40.58	43.79	54.00	10.21	Average
@ 2420.250	32.00	5.77	34.51	99.23	102.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

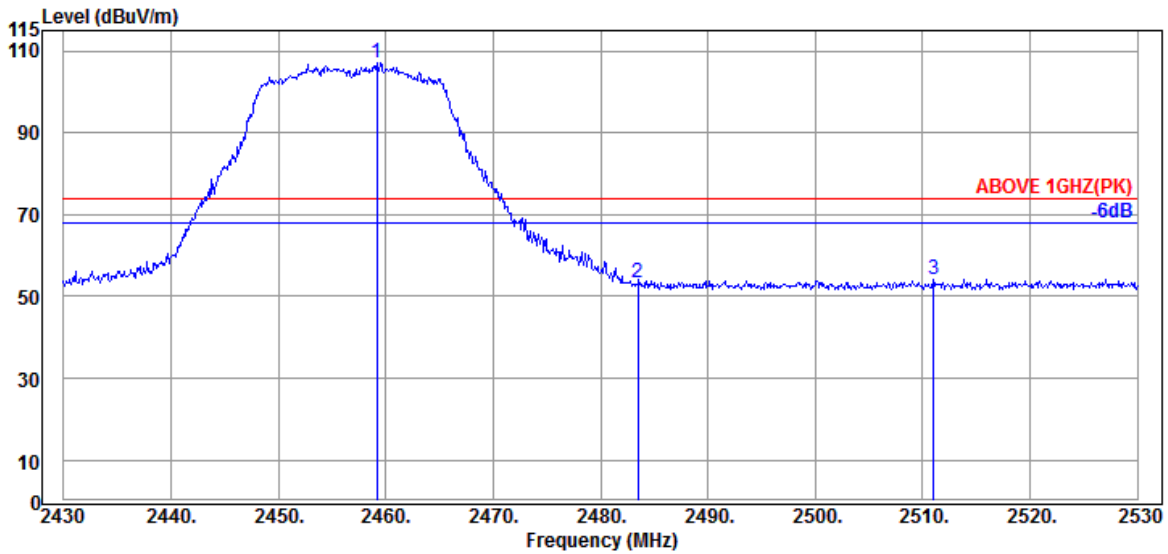

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	32.09	5.83	34.52	103.82	107.22	---	---	Peak
2483.500	32.43	5.87	34.53	49.47	53.24	74.00	20.76	Peak
2511.000	32.54	5.93	34.53	50.20	54.14	74.00	19.86	Peak

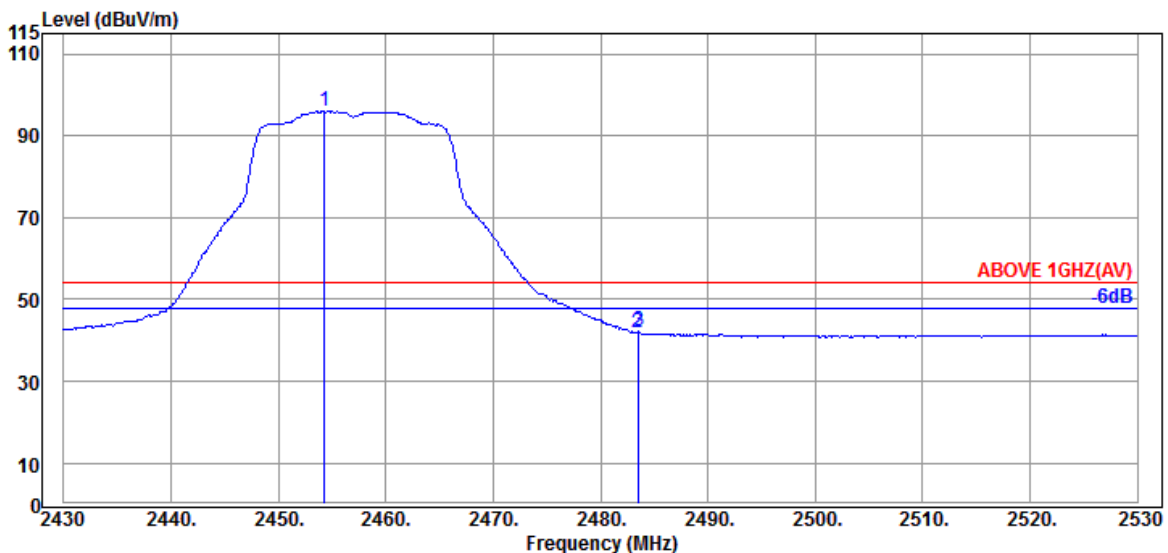


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.300	32.09	5.83	34.52	92.57	95.97	---	---	Average
2483.500	32.43	5.87	34.53	38.27	42.04	54.00	11.96	Average
2483.600	32.43	5.87	34.53	38.43	42.20	54.00	11.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

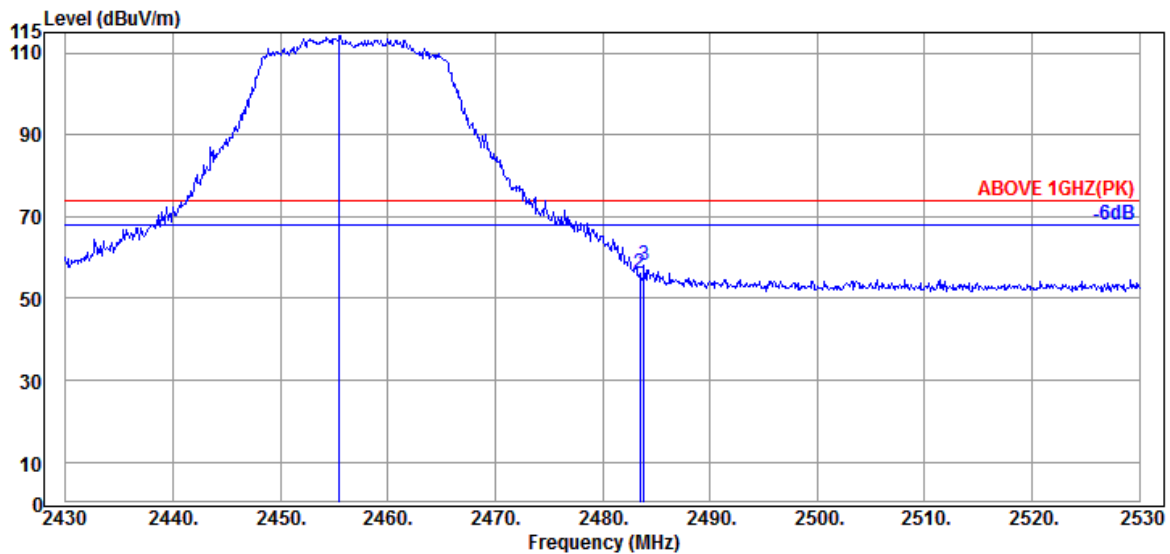

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	32.09	5.83	34.52	110.95	114.35	---	---	Peak
2483.500	32.43	5.87	34.53	52.34	56.11	74.00	17.89	Peak
2483.900	32.43	5.87	34.53	54.33	58.10	74.00	15.90	Peak

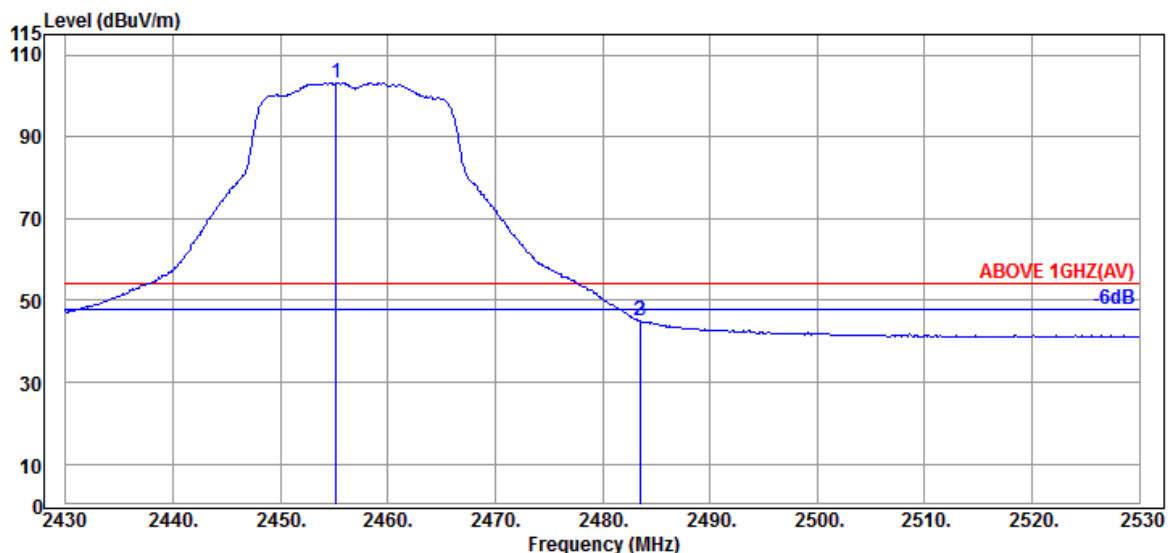


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.200	32.09	5.83	34.52	99.73	103.13	---	---	Average
2483.500	32.43	5.87	34.53	41.24	45.01	54.00	8.99	Average
2483.600	32.43	5.87	34.53	41.19	44.96	54.00	9.04	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

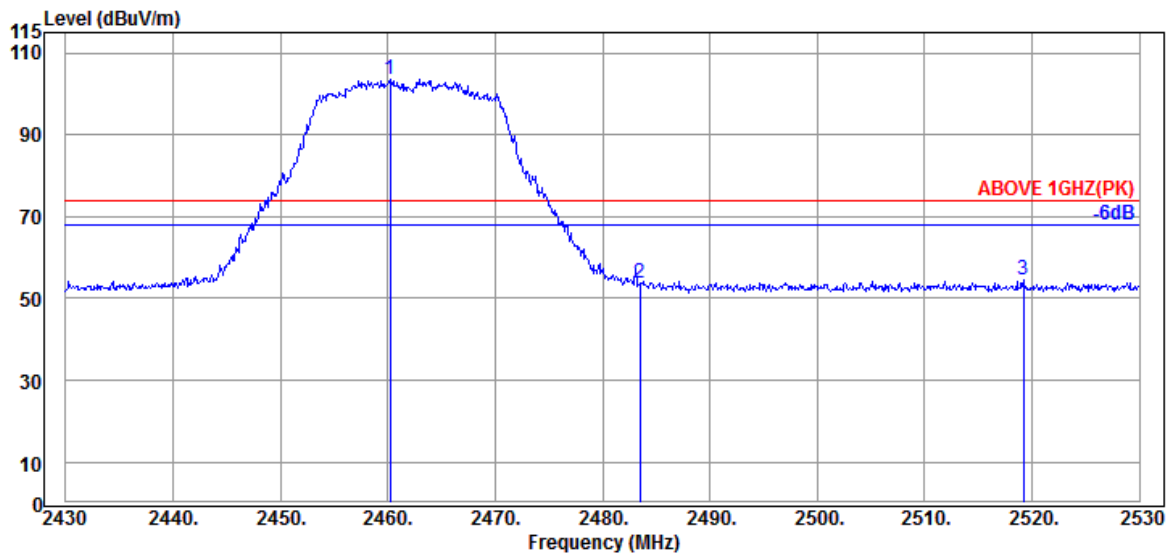

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	32.09	5.83	34.52	100.13	103.53	---	---	Peak
2483.500	32.43	5.87	34.53	49.80	53.57	74.00	20.43	Peak
2519.200	32.51	5.94	34.53	50.51	54.43	74.00	19.57	Peak

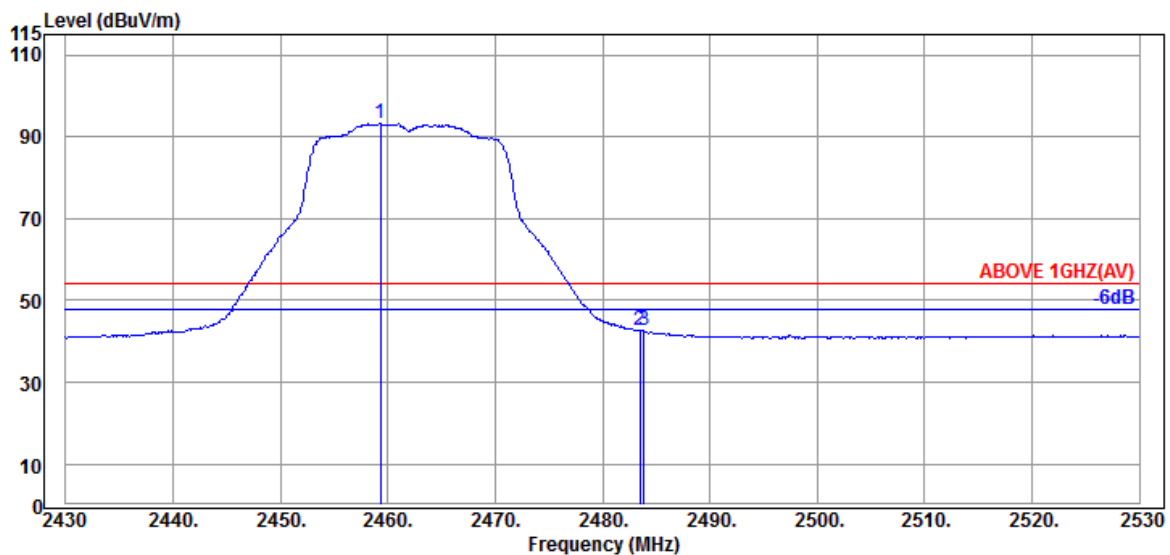


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	32.09	5.83	34.52	89.82	93.22	---	---	Average
2483.500	32.43	5.87	34.53	38.74	42.51	54.00	11.49	Average
2483.900	32.43	5.87	34.53	38.90	42.67	54.00	11.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

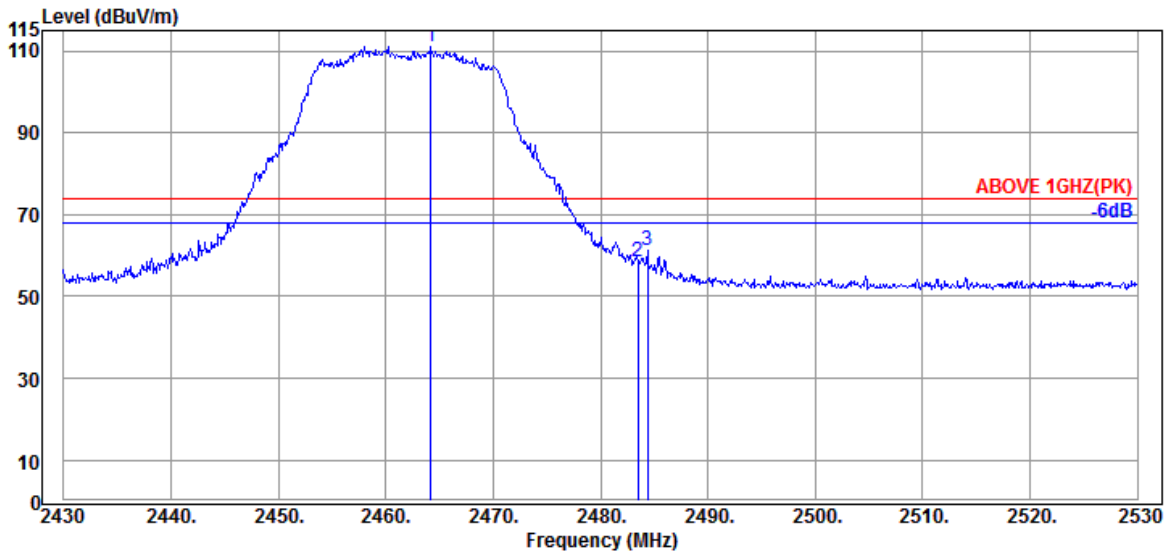

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	32.17	5.84	34.52	107.75	111.24	---	---	Peak
2483.500	32.43	5.87	34.53	54.54	58.31	74.00	15.69	Peak
2484.400	32.43	5.87	34.53	57.43	61.20	74.00	12.80	Peak

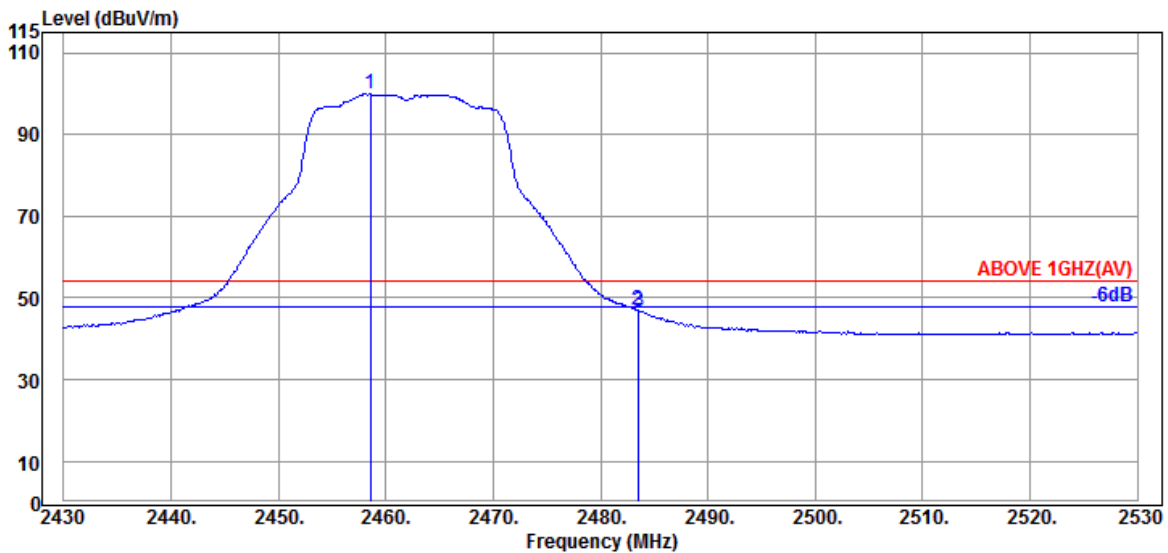


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.600	32.09	5.83	34.52	96.62	100.02	---	---	Average
2483.500	32.43	5.87	34.53	43.20	46.97	54.00	7.03	Average
2483.600	32.43	5.87	34.53	43.01	46.78	54.00	7.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

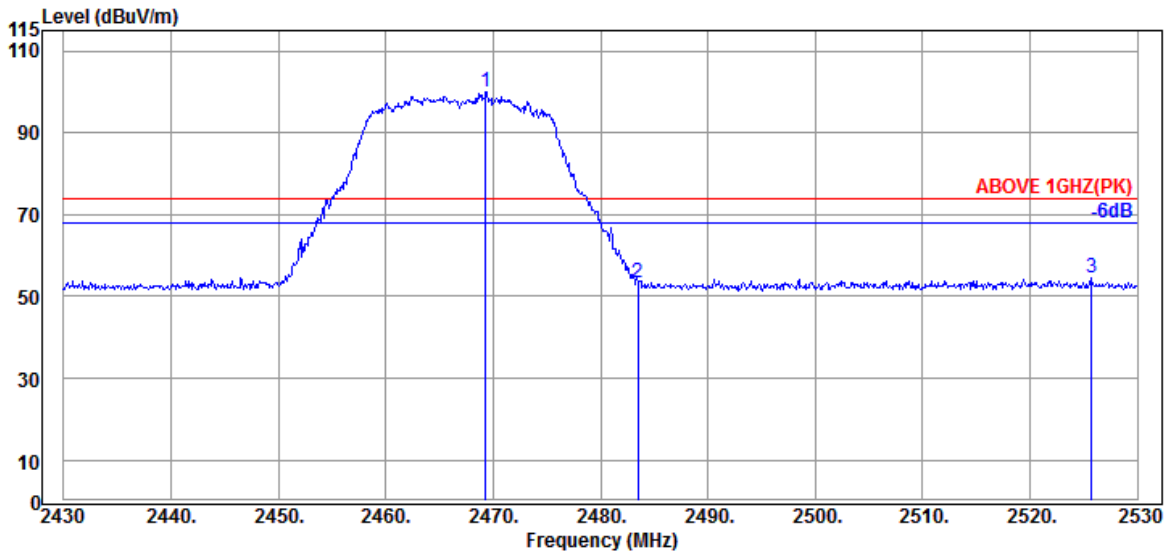

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	32.26	5.85	34.52	96.48	100.07	---	---	Peak
2483.500	32.43	5.87	34.53	49.70	53.47	74.00	20.53	Peak
2525.700	32.49	5.96	34.54	50.48	54.39	74.00	19.61	Peak

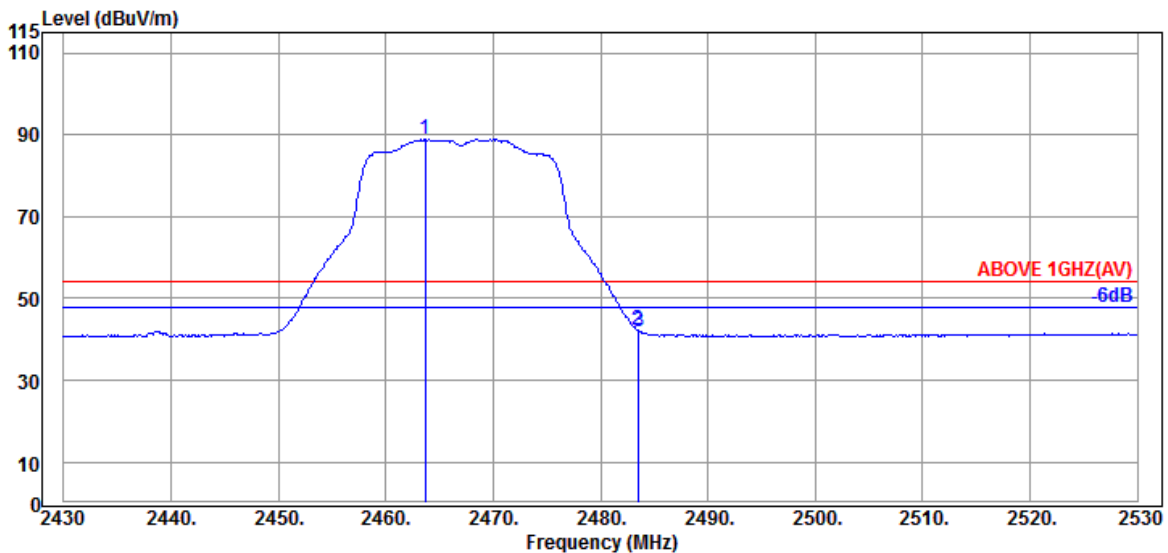


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.700	32.17	5.84	34.52	85.33	88.82	---	---	Average
2483.500	32.43	5.87	34.53	38.32	42.09	54.00	11.91	Average
2483.600	32.43	5.87	34.53	38.13	41.90	54.00	12.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

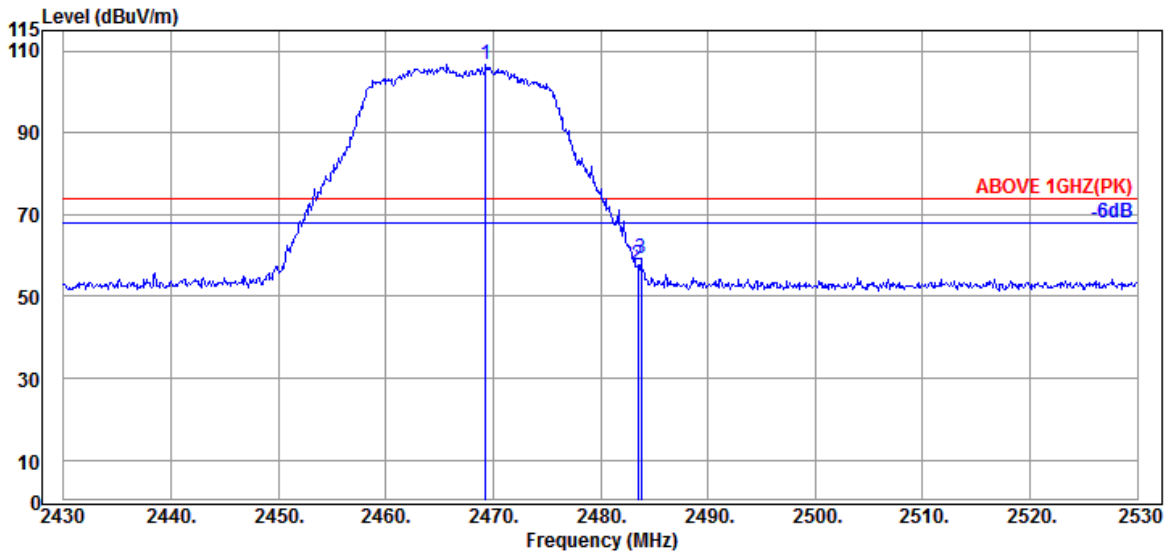

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	32.26	5.85	34.52	102.97	106.56	---	---	Peak
2483.500	32.43	5.87	34.53	54.05	57.82	74.00	16.18	Peak
2483.800	32.43	5.87	34.53	55.61	59.38	74.00	14.62	Peak

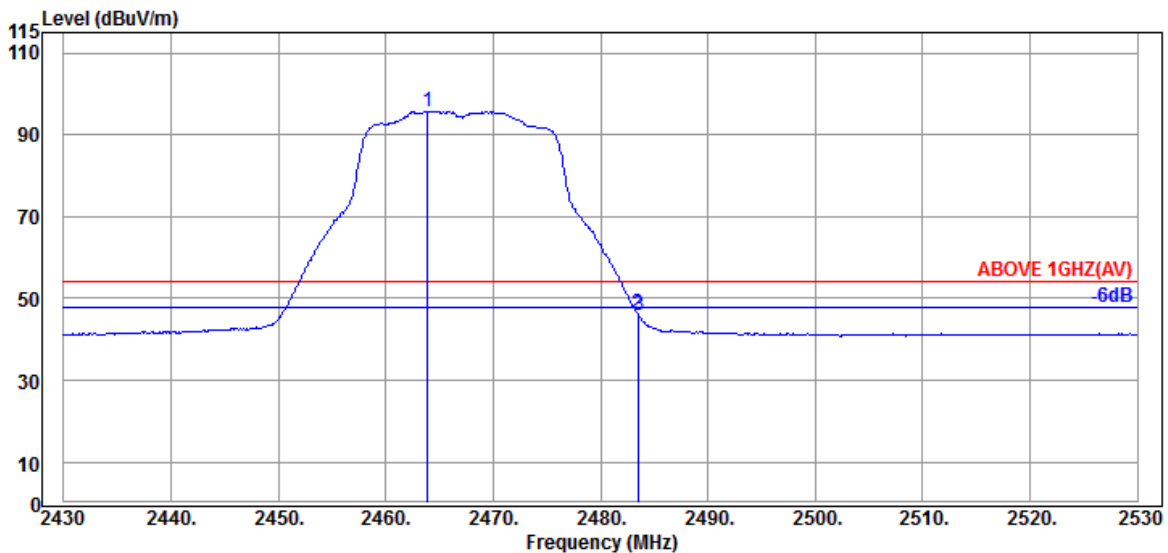


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	32.17	5.84	34.52	92.23	95.72	---	---	Average
2483.500	32.43	5.87	34.53	42.29	46.06	54.00	7.94	Average
2483.600	32.43	5.87	34.53	42.10	45.87	54.00	8.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

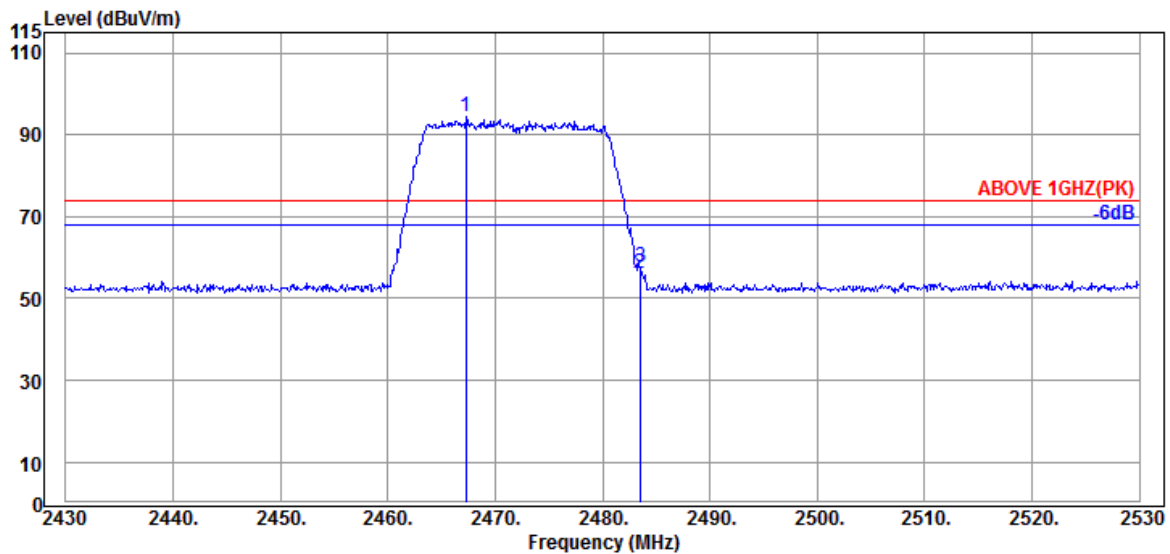

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.300	32.17	5.84	34.52	90.99	94.48	---	---	Peak
2483.500	32.43	5.87	34.53	52.34	56.11	74.00	17.89	Peak
2483.600	32.43	5.87	34.53	53.98	57.75	74.00	16.25	Peak

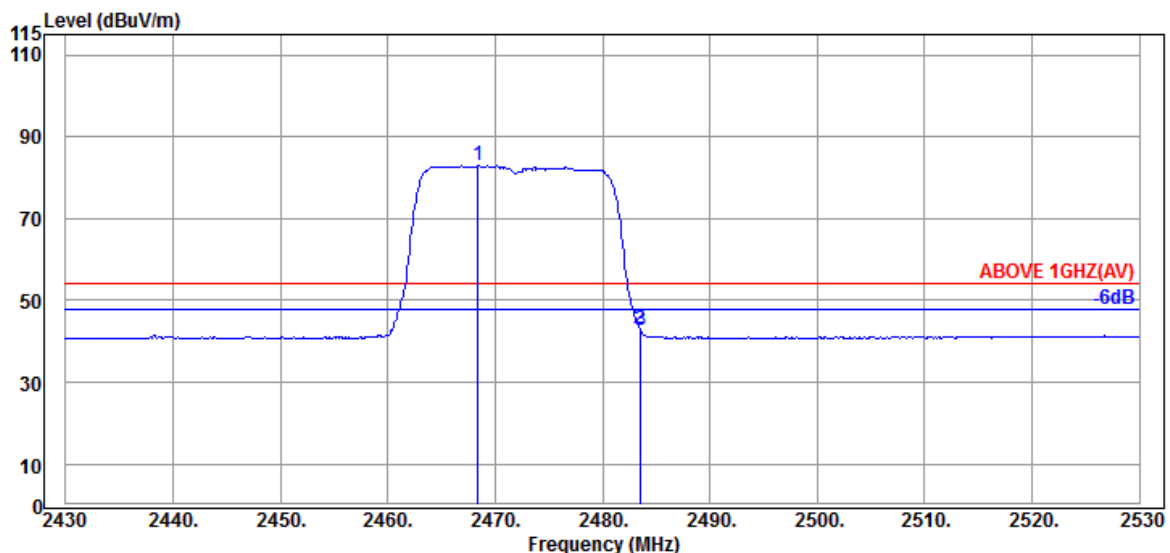


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.400	32.26	5.85	34.52	79.30	82.89	---	---	Average
2483.500	32.43	5.87	34.53	39.30	43.07	54.00	10.93	Average
2483.600	32.43	5.87	34.53	38.88	42.65	54.00	11.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

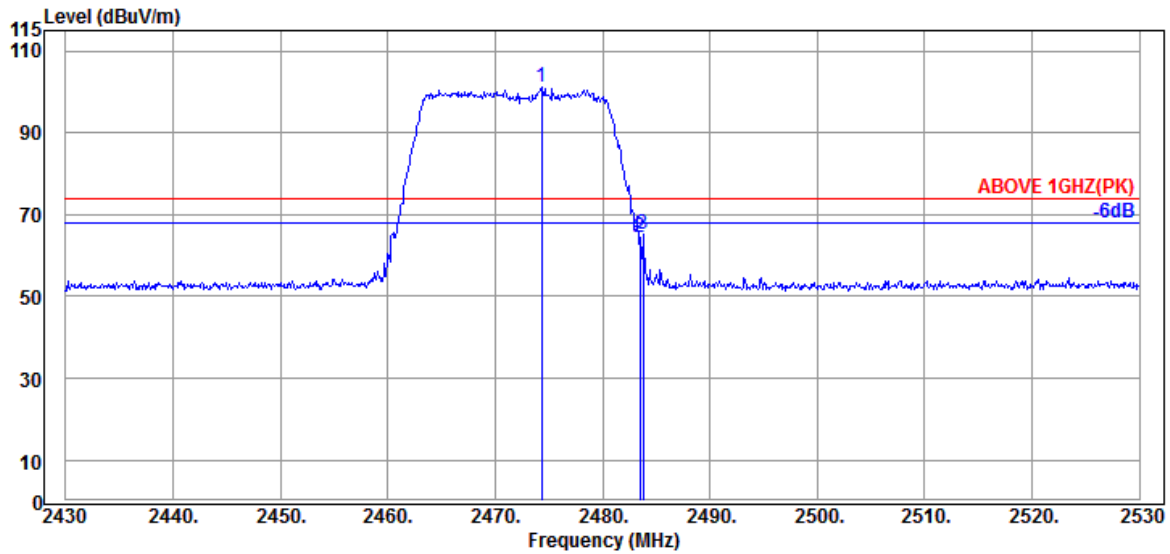

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.300	32.26	5.85	34.52	97.44	101.03	---	---	Peak
2483.500	32.43	5.87	34.53	60.57	64.34	74.00	9.66	Peak
2483.800	32.43	5.87	34.53	61.51	65.28	74.00	8.72	Peak

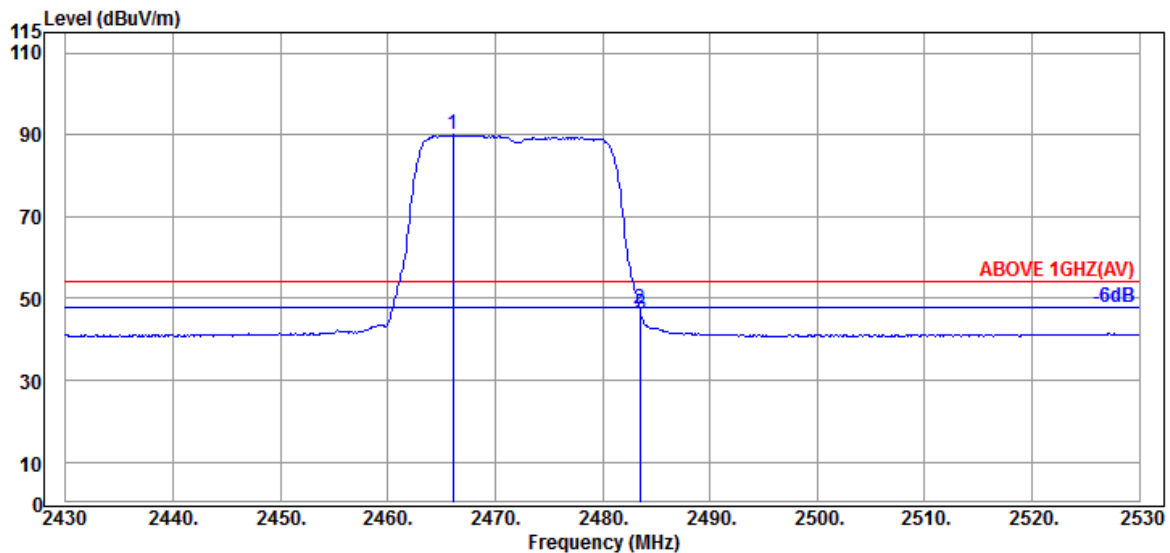


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	32.17	5.84	34.52	86.47	89.96	---	---	Average
2483.500	32.43	5.87	34.53	43.65	47.42	54.00	6.58	Average
2483.600	32.43	5.87	34.53	42.63	46.40	54.00	7.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

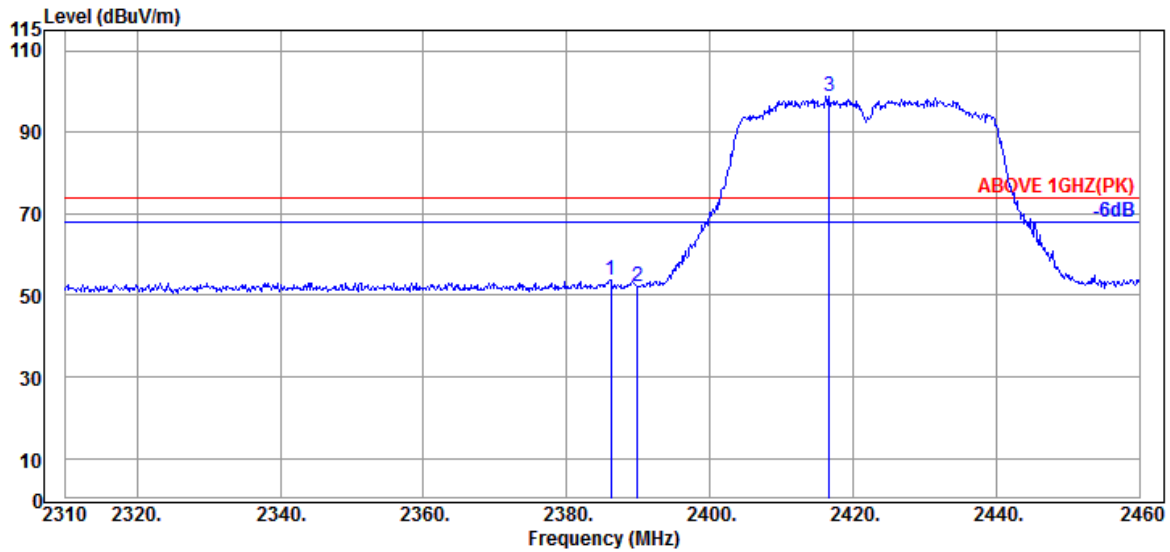

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2386.200	32.00	5.72	34.51	50.50	53.71	74.00	20.29	Peak
2389.950	32.00	5.72	34.51	49.08	52.29	74.00	21.71	Peak
@ 2416.650	32.00	5.76	34.51	95.66	98.91	---	---	Peak

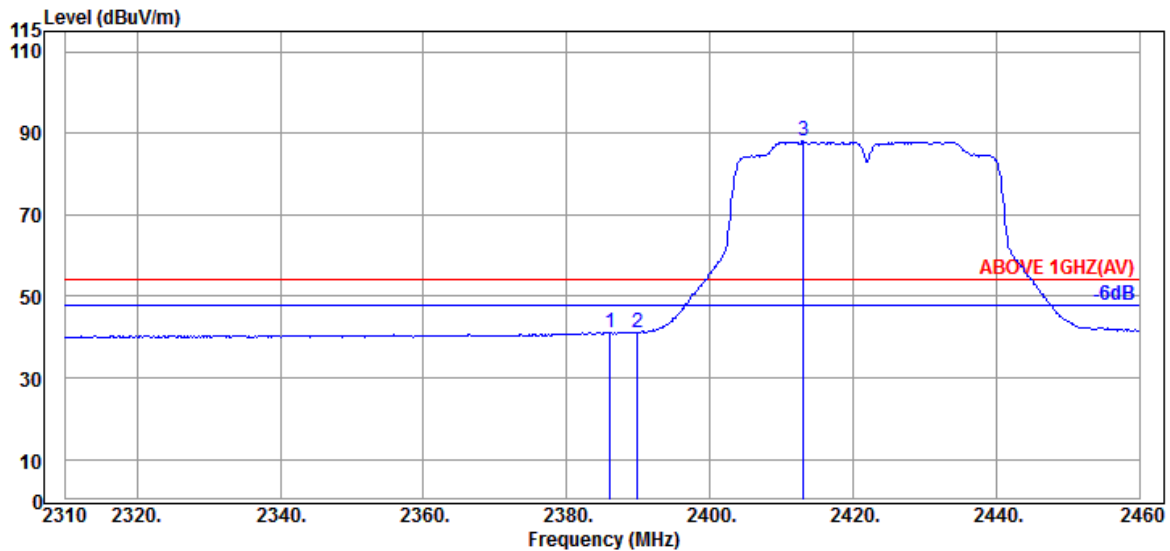


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.050	32.00	5.72	34.51	38.00	41.21	54.00	12.79	Average
2389.950	32.00	5.72	34.51	37.91	41.12	54.00	12.88	Average
@ 2413.050	32.00	5.76	34.51	84.75	88.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

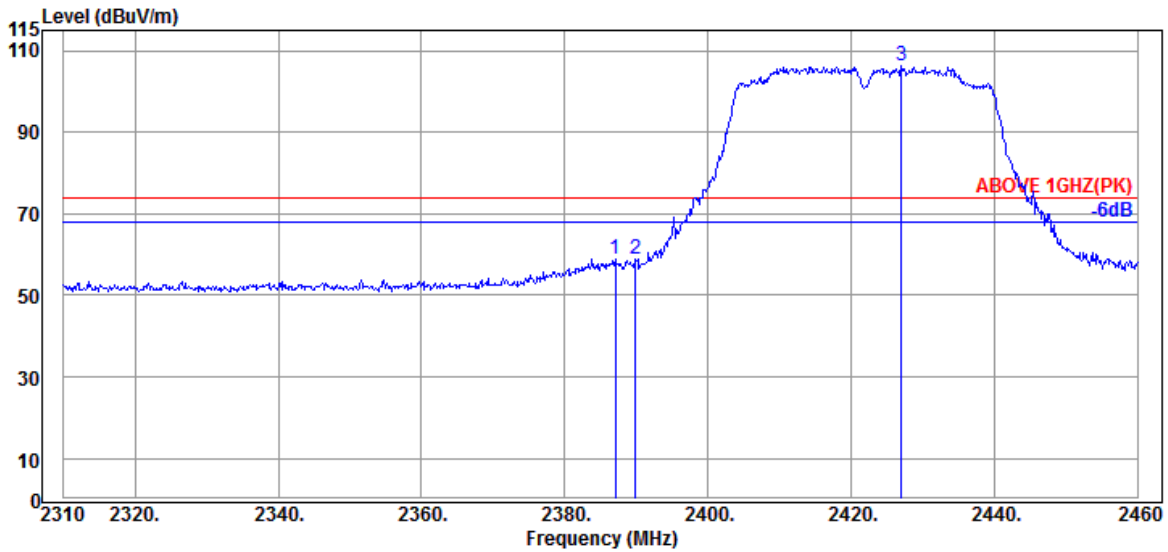

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	32.00	5.72	34.51	55.77	58.98	74.00	15.02	Peak
2389.950	32.00	5.72	34.51	55.50	58.71	74.00	15.29	Peak
@ 2427.000	32.00	5.78	34.52	103.13	106.39	---	---	Peak

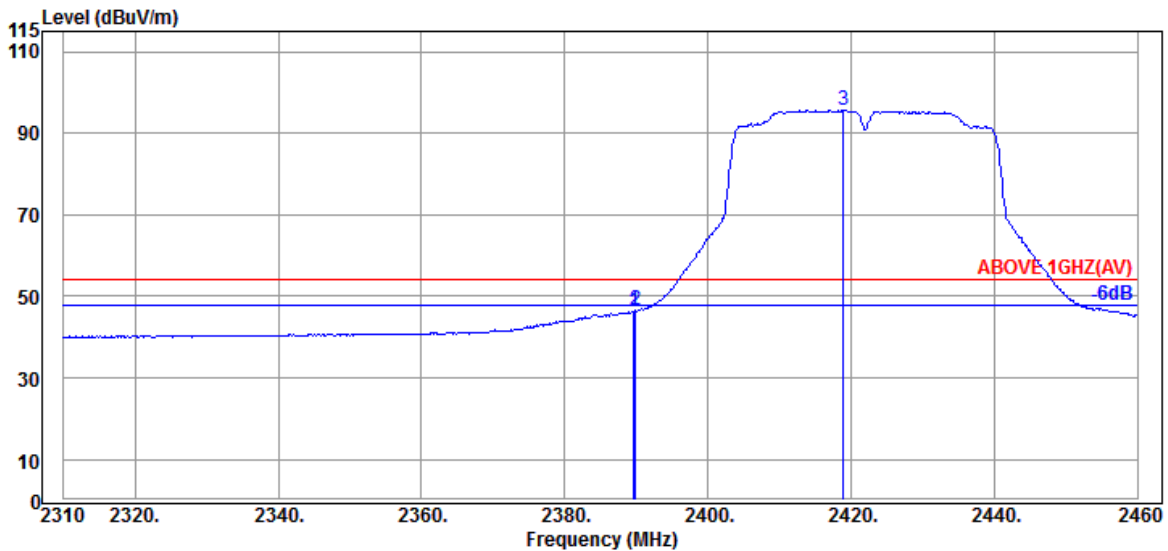


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	32.00	5.72	34.51	43.11	46.32	54.00	7.68	Average
2389.950	32.00	5.72	34.51	43.41	46.62	54.00	7.38	Average
@ 2418.900	32.00	5.77	34.51	92.42	95.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

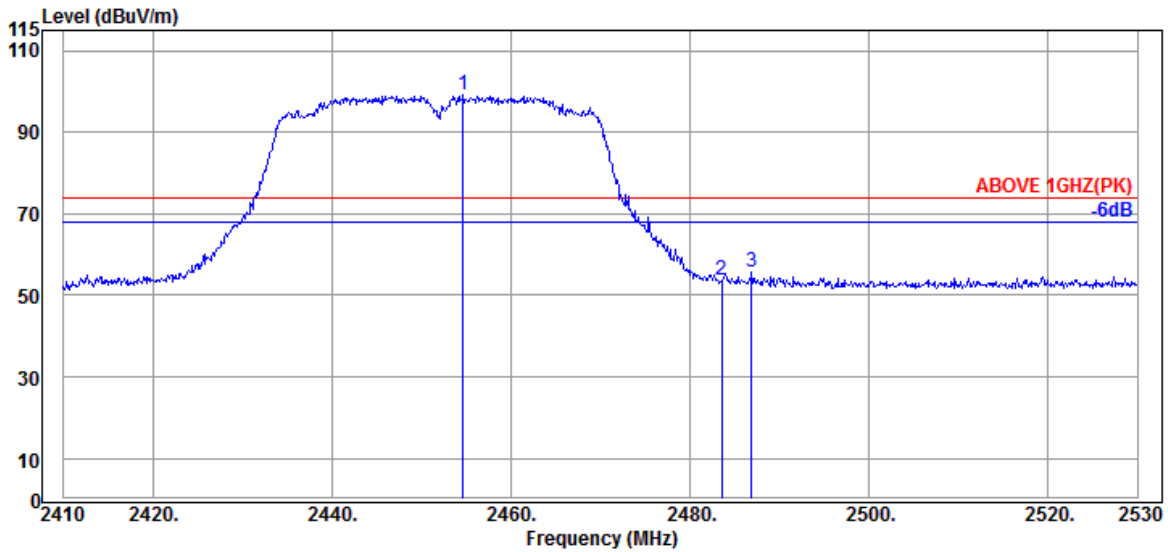

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.640	32.09	5.83	34.52	95.64	99.04	---	---	Peak
2483.560	32.43	5.87	34.53	49.94	53.71	74.00	20.29	Peak
2486.920	32.43	5.87	34.53	52.02	55.79	74.00	18.21	Peak

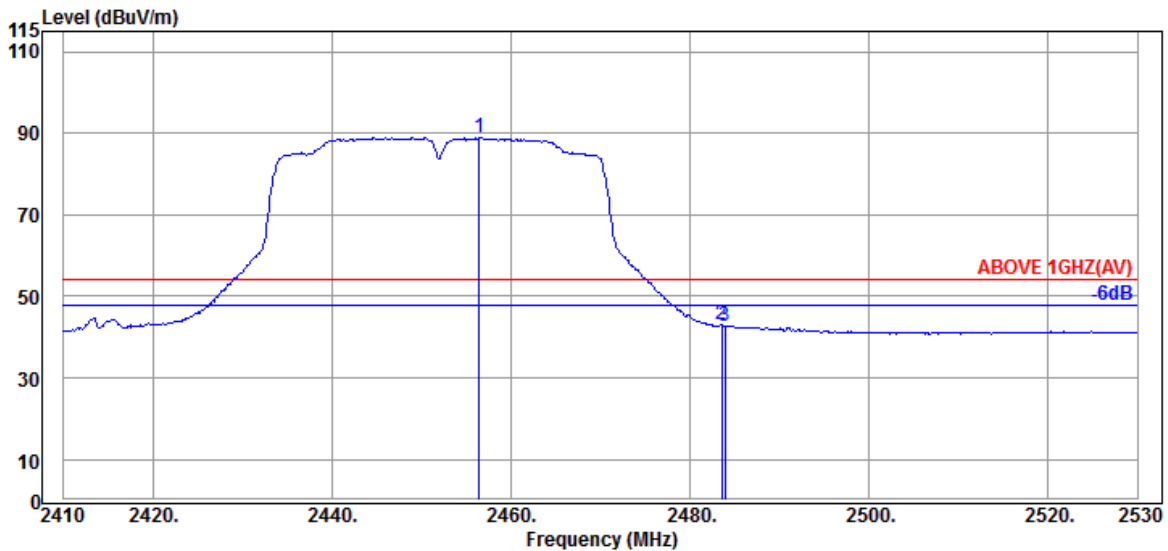


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.440	32.09	5.83	34.52	85.47	88.87	---	---	Average
2483.560	32.43	5.87	34.53	39.11	42.88	54.00	11.12	Average
2483.920	32.43	5.87	34.53	39.09	42.86	54.00	11.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

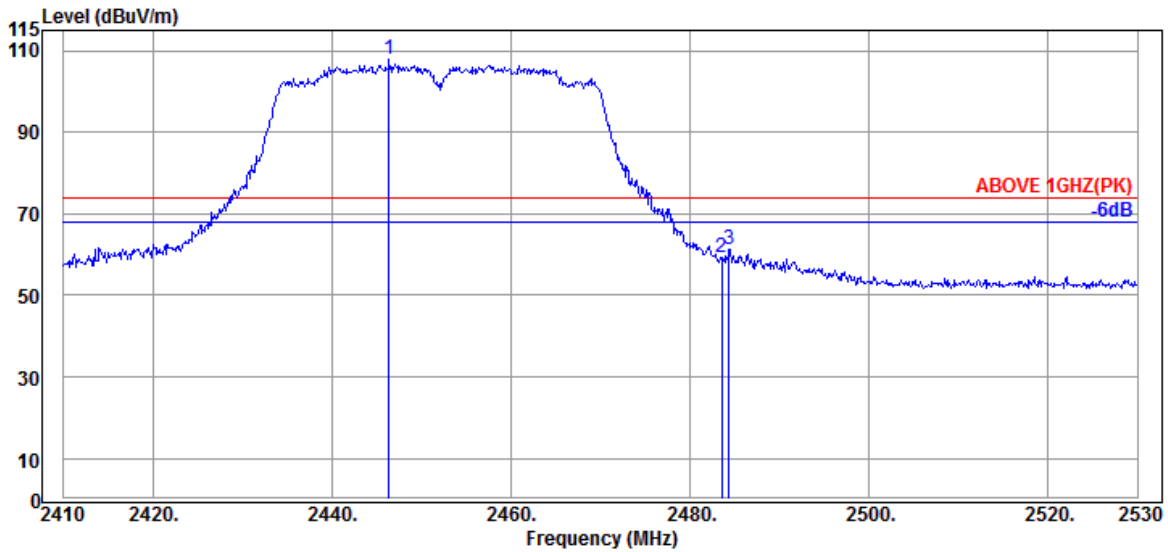

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.360	32.00	5.81	34.52	104.58	107.87	---	---	Peak
2483.560	32.43	5.87	34.53	55.62	59.39	74.00	14.61	Peak
2484.400	32.43	5.87	34.53	57.38	61.15	74.00	12.85	Peak

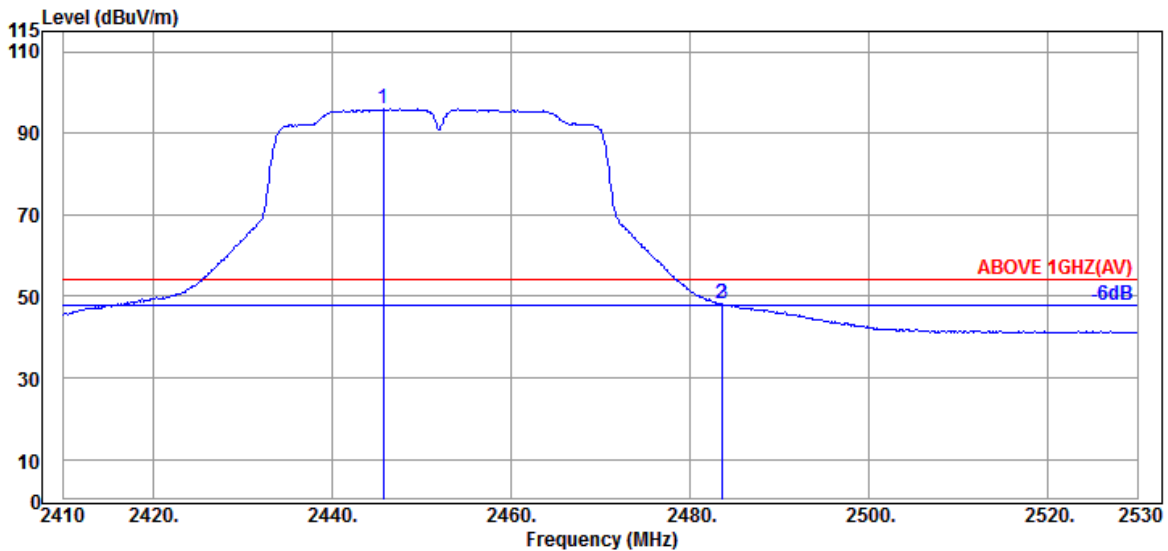


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.760	32.00	5.80	34.52	92.60	95.88	---	---	Average
2483.560	32.43	5.87	34.53	44.40	48.17	54.00	5.83	Average
2483.680	32.43	5.87	34.53	44.34	48.11	54.00	5.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

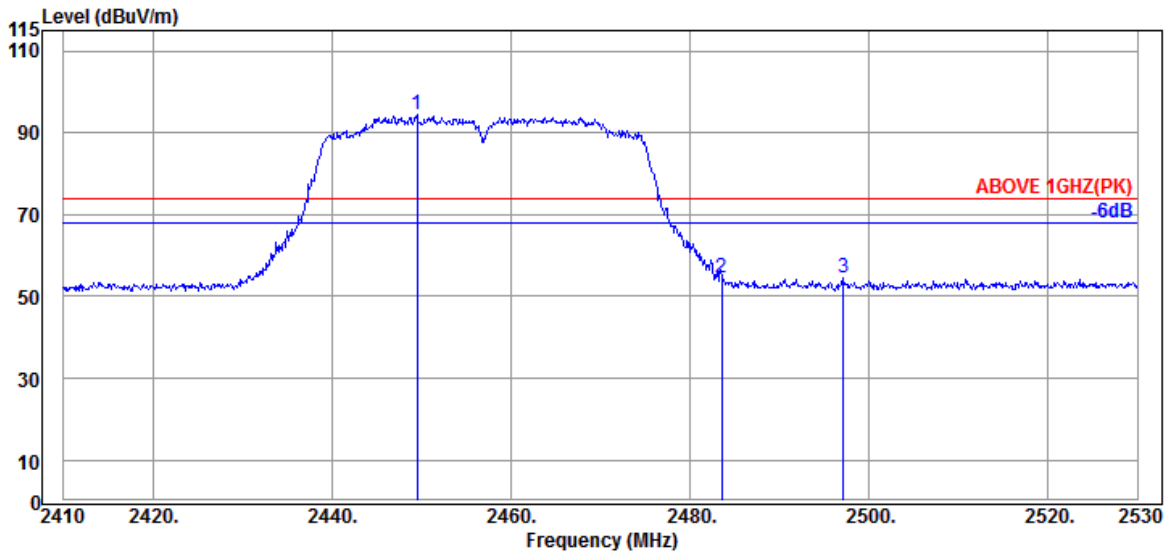

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.480	32.00	5.81	34.52	91.01	94.30	---	---	Peak
2483.560	32.43	5.87	34.53	50.85	54.62	74.00	19.38	Peak
2497.120	32.60	5.89	34.53	50.62	54.58	74.00	19.42	Peak

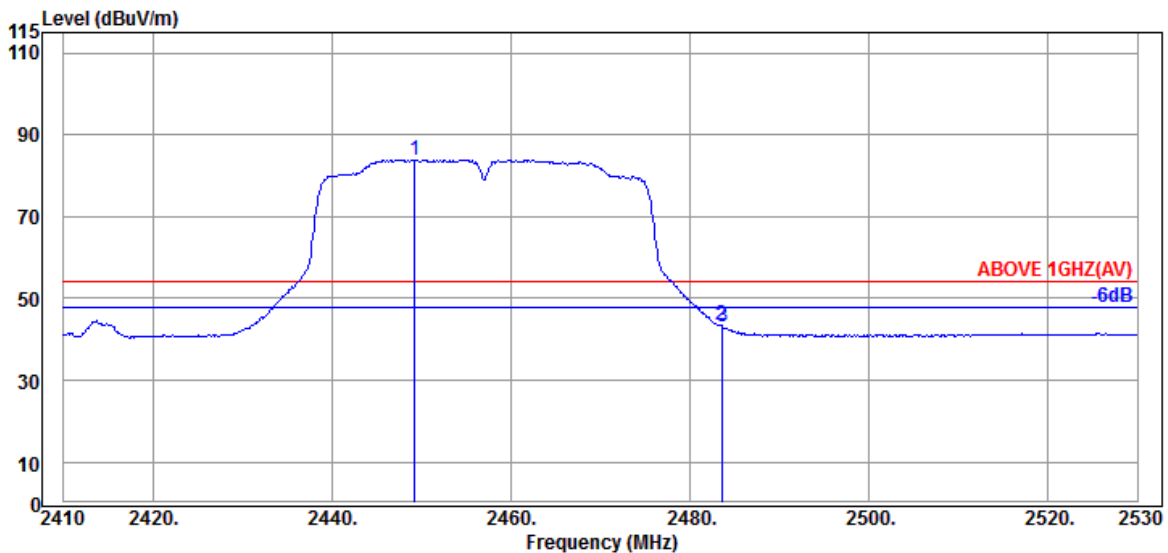


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.240	32.00	5.81	34.52	80.67	83.96	---	---	Average
2483.560	32.43	5.87	34.53	39.64	43.41	54.00	10.59	Average
2483.680	32.43	5.87	34.53	39.21	42.98	54.00	11.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

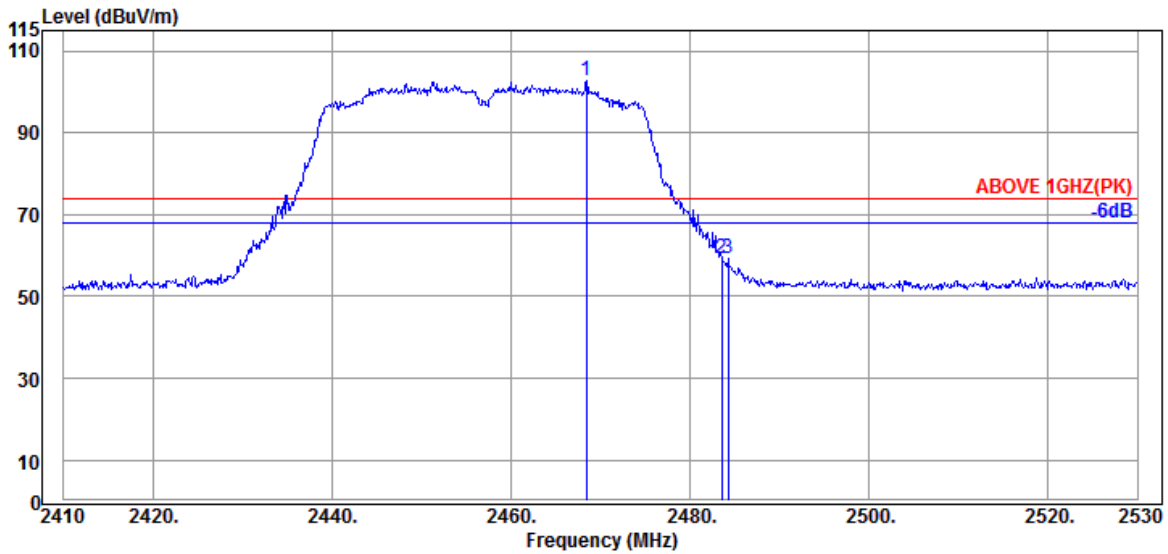

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.440	32.26	5.85	34.52	99.01	102.60	---	---	Peak
2483.560	32.43	5.87	34.53	55.33	59.10	74.00	14.90	Peak
2484.280	32.43	5.87	34.53	55.50	59.27	74.00	14.73	Peak

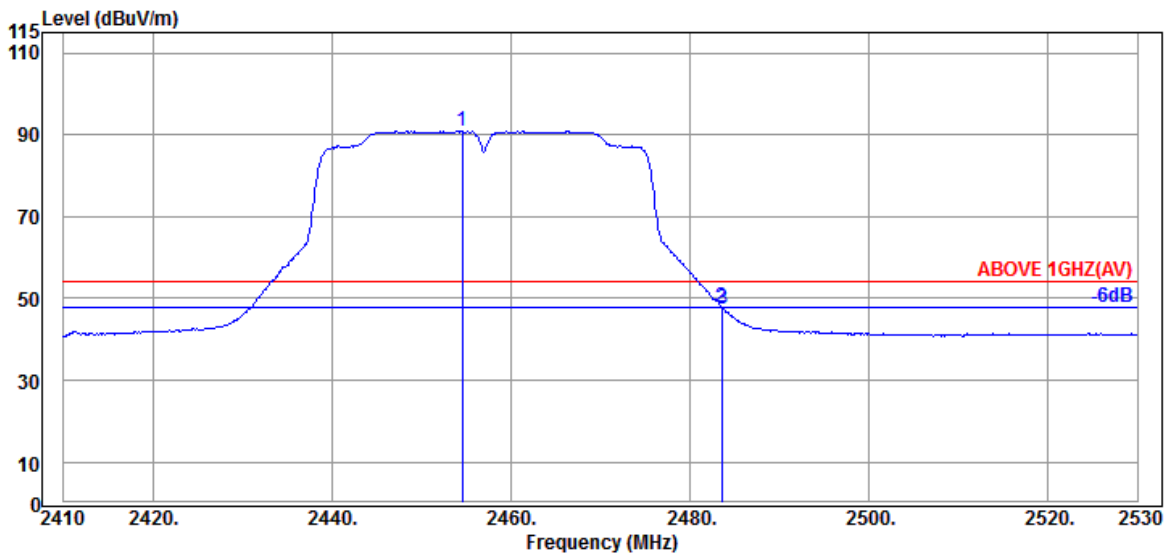


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.520	32.09	5.83	34.52	87.60	91.00	---	---	Average
2483.560	32.43	5.87	34.53	44.01	47.78	54.00	6.22	Average
2483.680	32.43	5.87	34.53	43.78	47.55	54.00	6.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

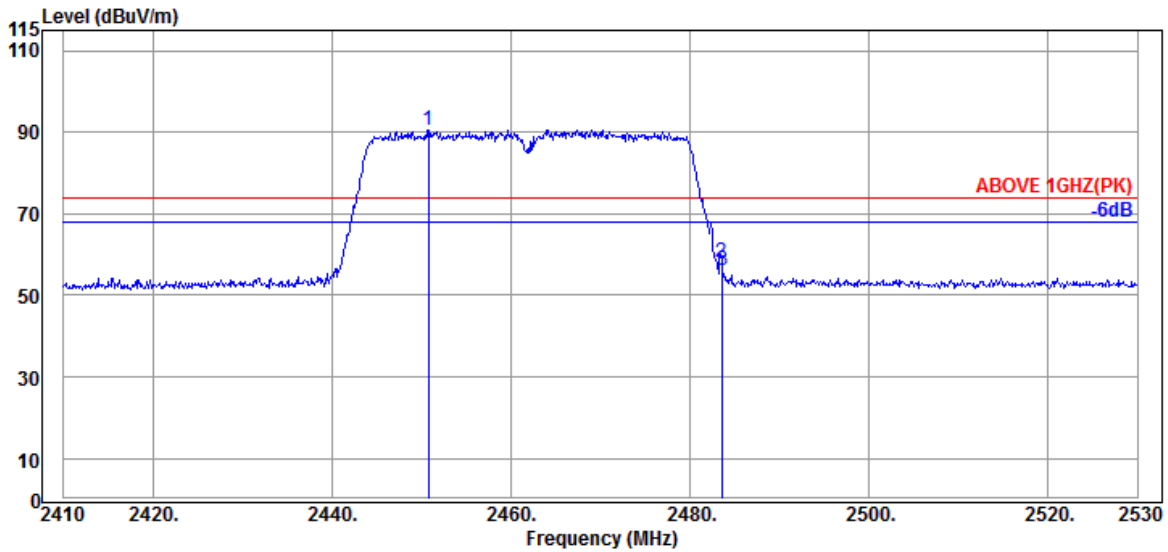

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.800	32.00	5.81	34.52	87.34	90.63	---	---	Peak
2483.560	32.43	5.87	34.53	54.50	58.27	74.00	15.73	Peak
2483.680	32.43	5.87	34.53	52.28	56.05	74.00	17.95	Peak

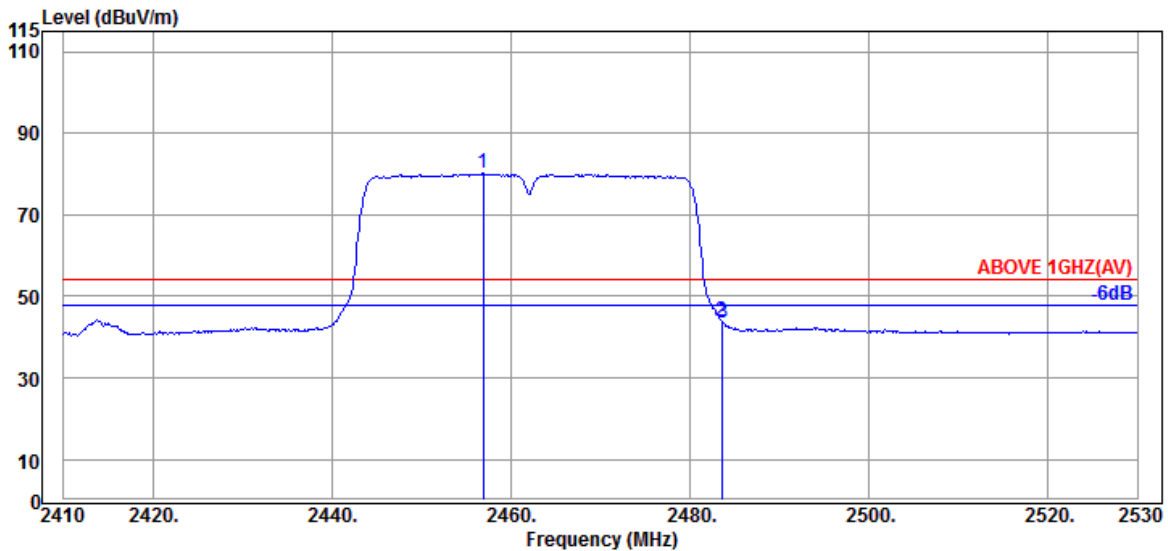


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.920	32.09	5.83	34.52	76.67	80.07	---	---	Average
2483.560	32.43	5.87	34.53	40.17	43.94	54.00	10.06	Average
2483.680	32.43	5.87	34.53	39.70	43.47	54.00	10.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

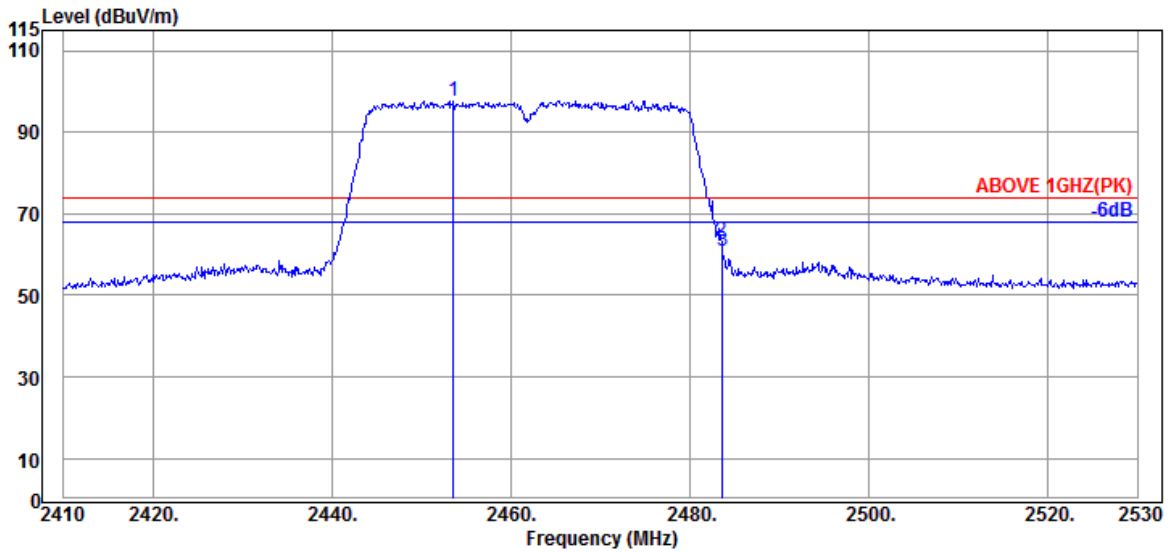

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.560	32.09	5.83	34.52	94.35	97.75	---	---	Peak
2483.560	32.43	5.87	34.53	59.64	63.41	74.00	10.59	Peak
2483.680	32.43	5.87	34.53	57.24	61.01	74.00	12.99	Peak

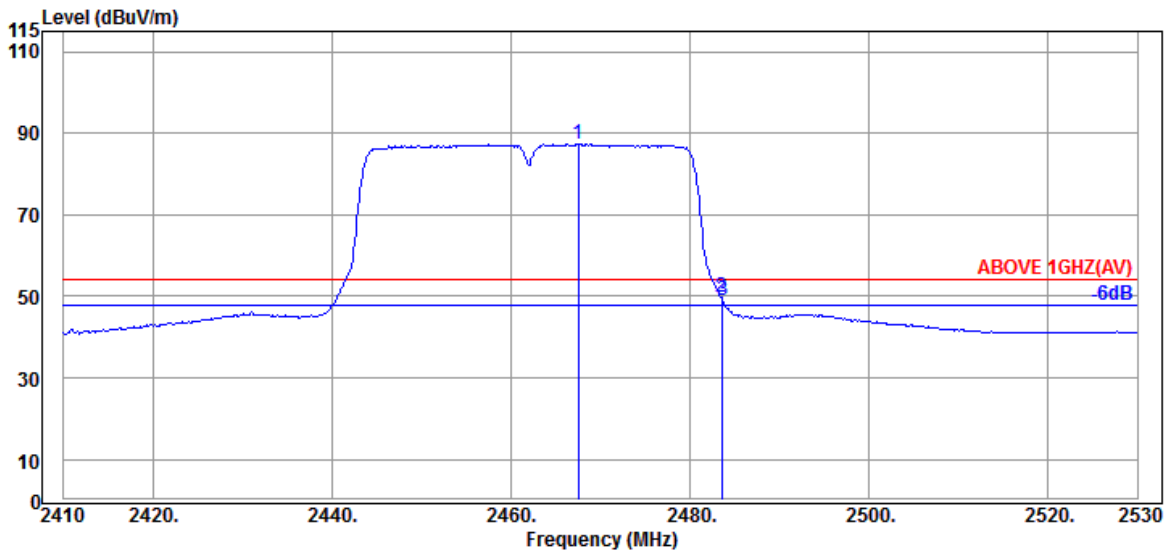


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.480	32.17	5.84	34.52	83.84	87.33	---	---	Average
2483.560	32.43	5.87	34.53	45.83	49.60	54.00	4.40	Average
2483.680	32.43	5.87	34.53	45.34	49.11	54.00	4.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

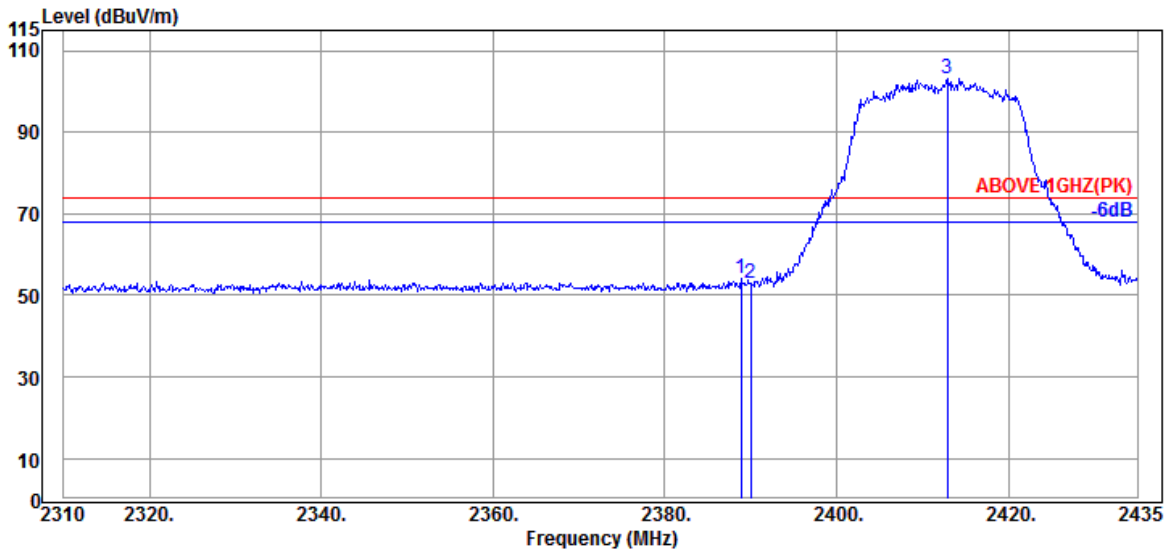

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.875	32.00	5.72	34.51	50.80	54.01	74.00	19.99	Peak
2390.000	32.00	5.72	34.51	49.85	53.06	74.00	20.94	Peak
@ 2412.875	32.00	5.76	34.51	99.93	103.18	---	---	Peak

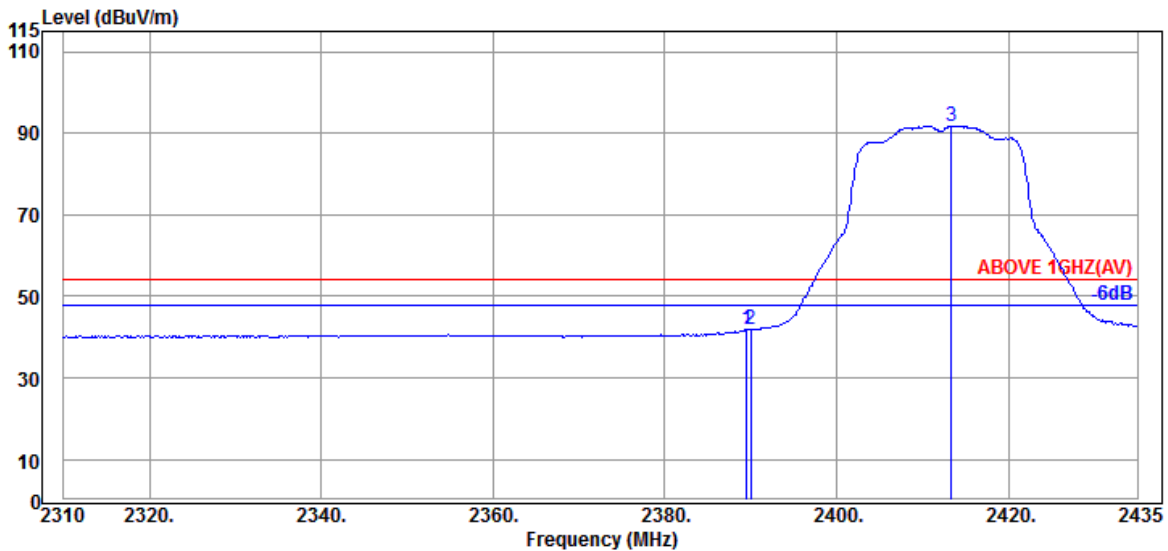


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	38.85	42.06	54.00	11.94	Average
2390.000	32.00	5.72	34.51	38.57	41.78	54.00	12.22	Average
@ 2413.375	32.00	5.76	34.51	88.60	91.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

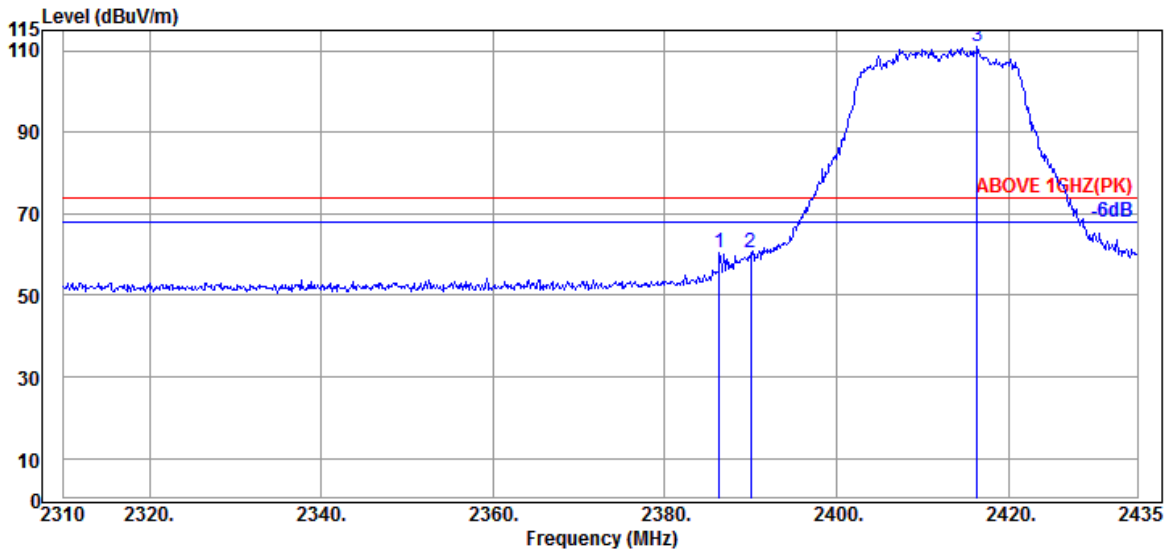

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.375	32.00	5.72	34.51	57.23	60.44	74.00	13.56	Peak
2390.000	32.00	5.72	34.51	57.10	60.31	74.00	13.69	Peak
@ 2416.375	32.00	5.76	34.51	107.78	111.03	---	---	Peak

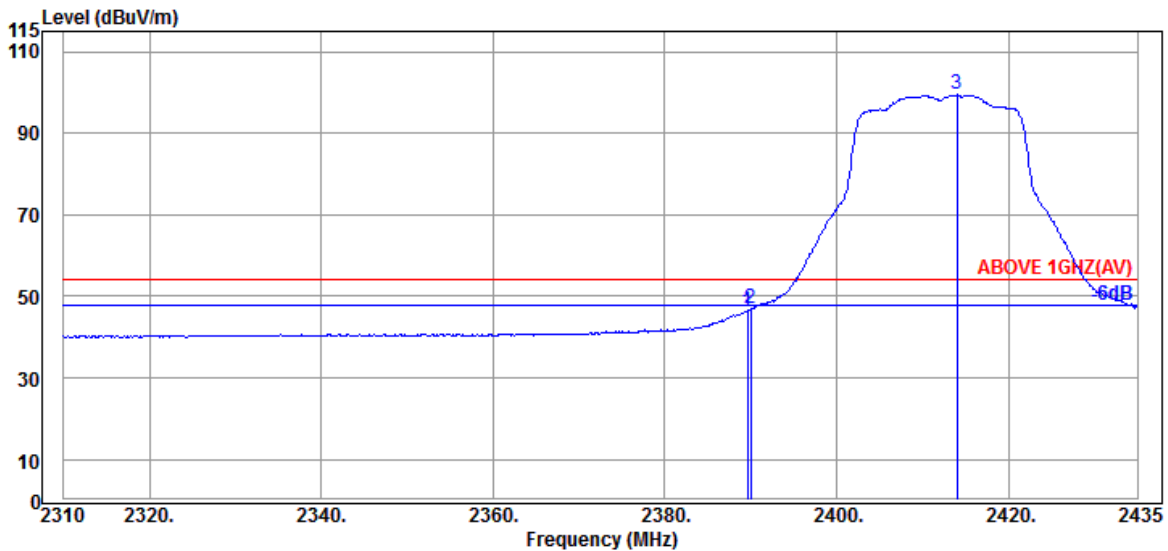


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	32.00	5.72	34.51	43.20	46.41	54.00	7.59	Average
2390.000	32.00	5.72	34.51	43.64	46.85	54.00	7.15	Average
@ 2414.000	32.00	5.76	34.51	96.21	99.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

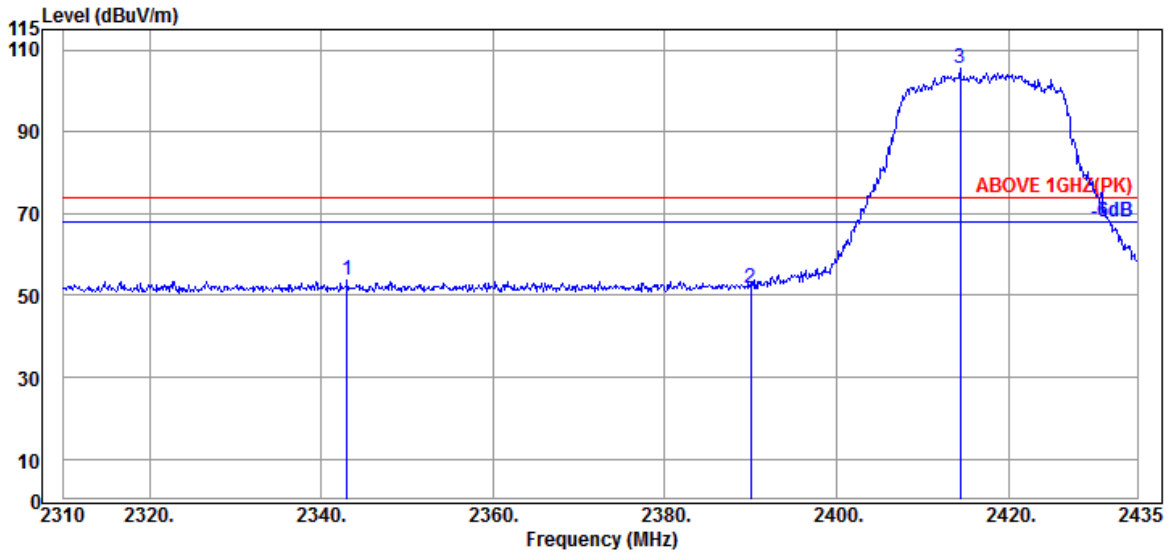

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2343.000	32.03	5.65	34.50	50.53	53.71	74.00	20.29	Peak
2390.000	32.00	5.72	34.51	48.55	51.76	74.00	22.24	Peak
@ 2414.375	32.00	5.76	34.51	102.18	105.43	---	---	Peak

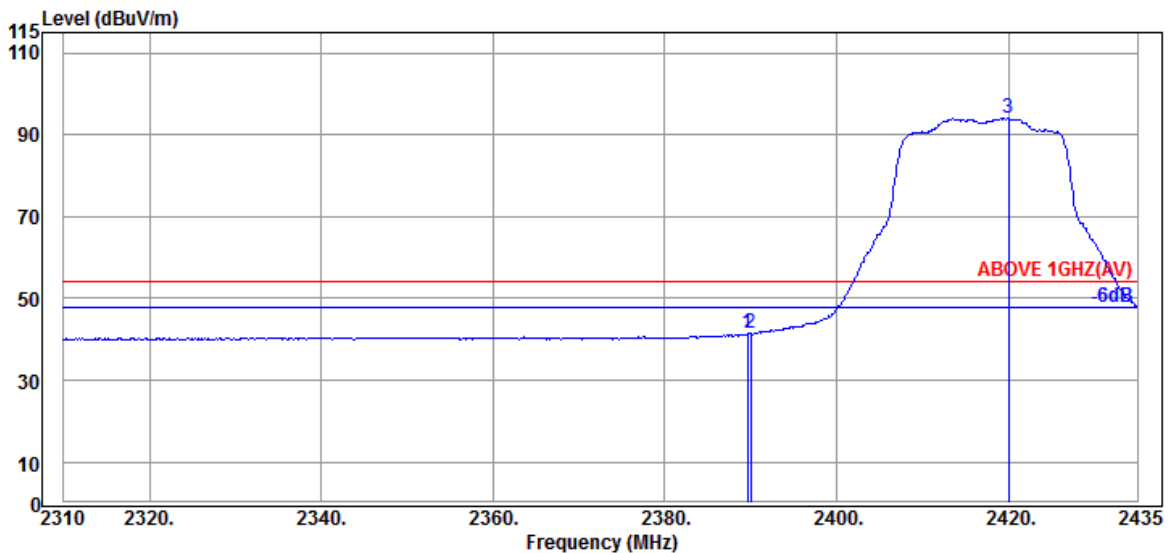


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	32.00	5.72	34.51	38.10	41.31	54.00	12.69	Average
2390.000	32.00	5.72	34.51	38.16	41.37	54.00	12.63	Average
@ 2420.000	32.00	5.77	34.51	90.69	93.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

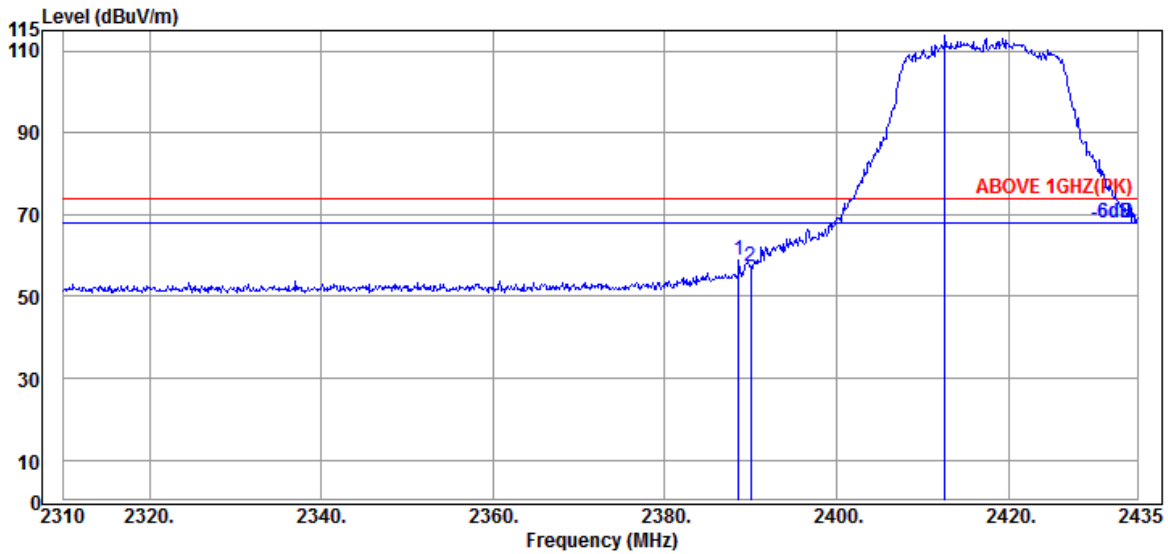

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.625	32.00	5.72	34.51	55.60	58.81	74.00	15.19	Peak
2390.000	32.00	5.72	34.51	53.90	57.11	74.00	16.89	Peak
@ 2412.625	32.00	5.76	34.51	110.48	113.73	---	---	Peak

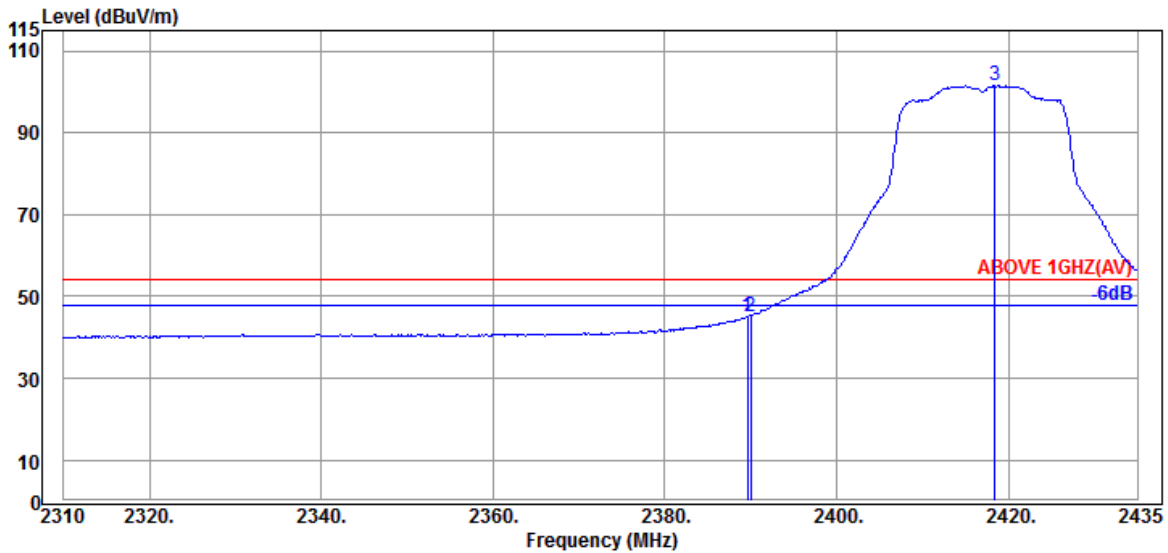


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	32.00	5.72	34.51	41.87	45.08	54.00	8.92	Average
2390.000	32.00	5.72	34.51	42.00	45.21	54.00	8.79	Average
@ 2418.375	32.00	5.77	34.51	98.24	101.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

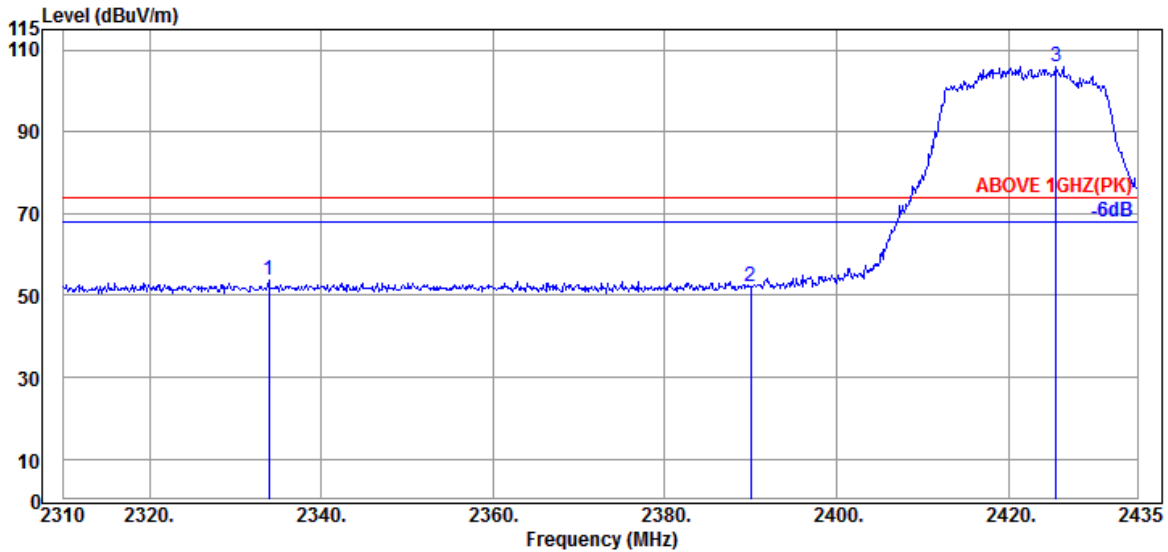

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2333.875	32.08	5.63	34.50	50.38	53.59	74.00	20.41	Peak
2390.000	32.00	5.72	34.51	49.03	52.24	74.00	21.76	Peak
@ 2425.500	32.00	5.78	34.51	102.58	105.85	---	---	Peak

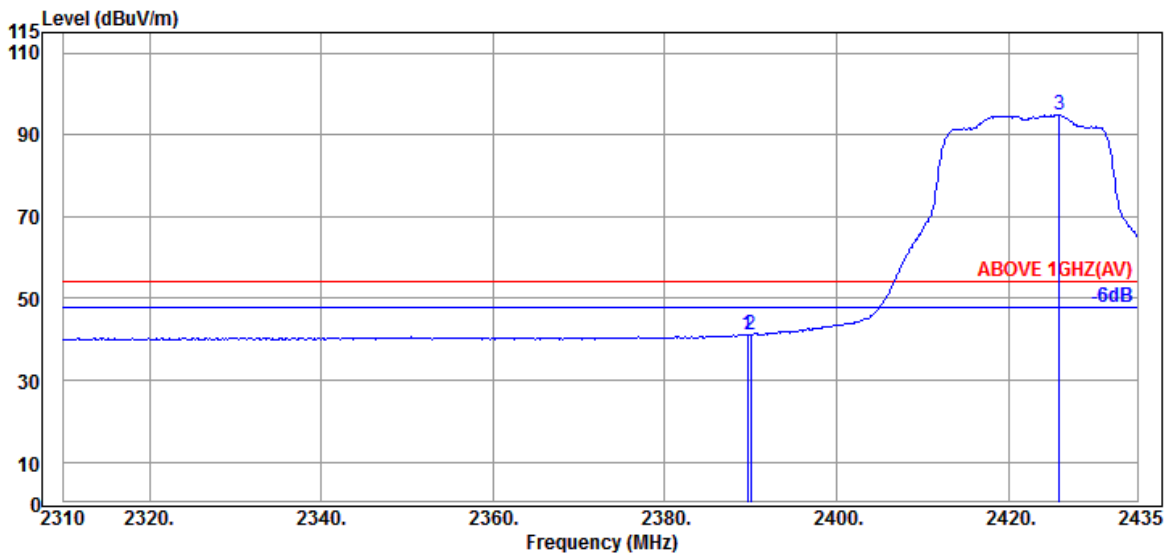


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.625	32.00	5.72	34.51	37.96	41.17	54.00	12.83	Average
2390.000	32.00	5.72	34.51	38.01	41.22	54.00	12.78	Average
@ 2425.875	32.00	5.78	34.51	91.70	94.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.



Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

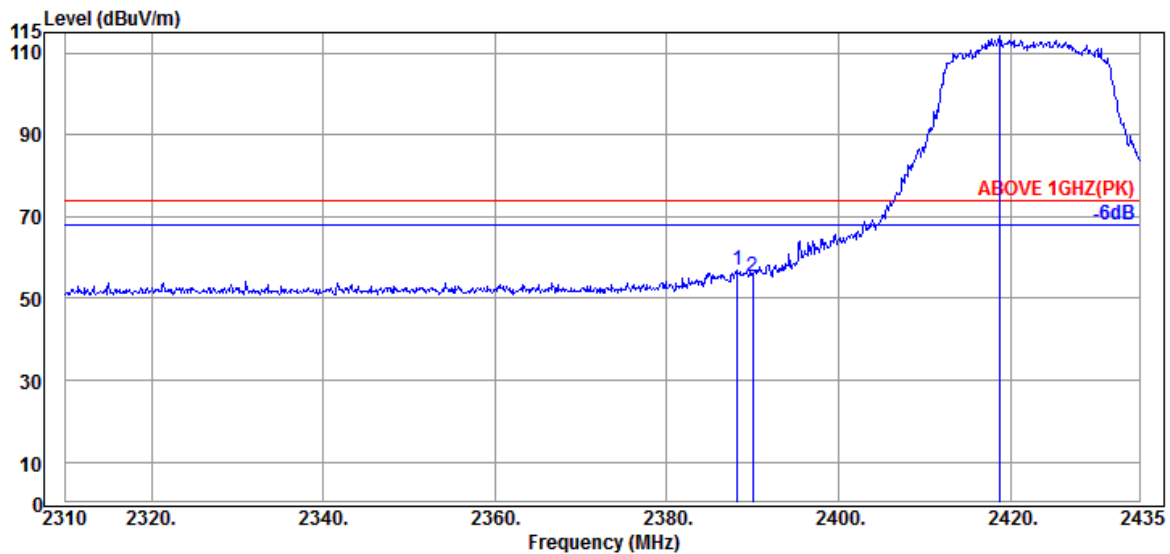
**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.250	32.00	5.72	34.51	53.74	56.95	74.00	17.05	Peak
2390.000	32.00	5.72	34.51	52.27	55.48	74.00	18.52	Peak
@ 2418.750	32.00	5.77	34.51	110.92	114.18	---	---	Peak

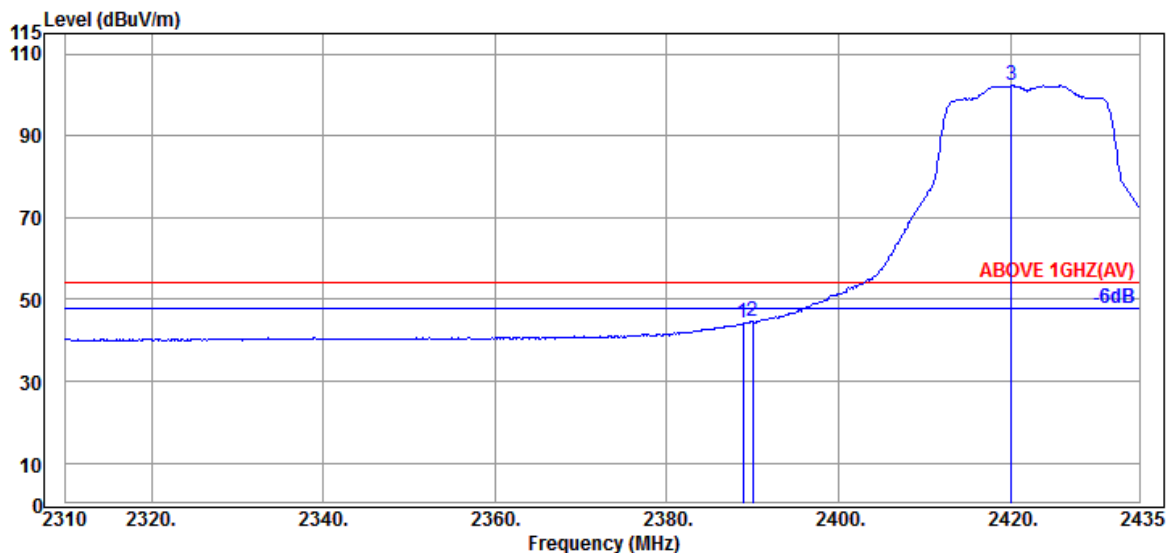
**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.875	32.00	5.72	34.51	41.08	44.29	54.00	9.71	Average
2390.000	32.00	5.72	34.51	41.29	44.50	54.00	9.50	Average
@ 2420.125	32.00	5.77	34.51	99.13	102.39	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

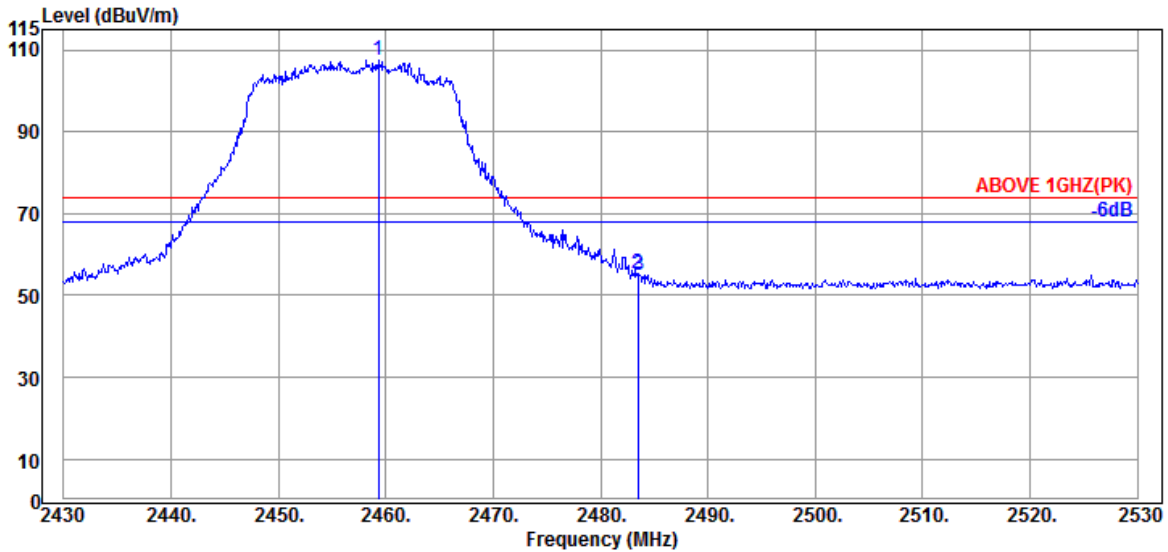

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	32.09	5.83	34.52	104.16	107.56	---	---	Peak
2483.500	32.43	5.87	34.53	51.42	55.19	74.00	18.81	Peak
2483.600	32.43	5.87	34.53	51.27	55.04	74.00	18.96	Peak

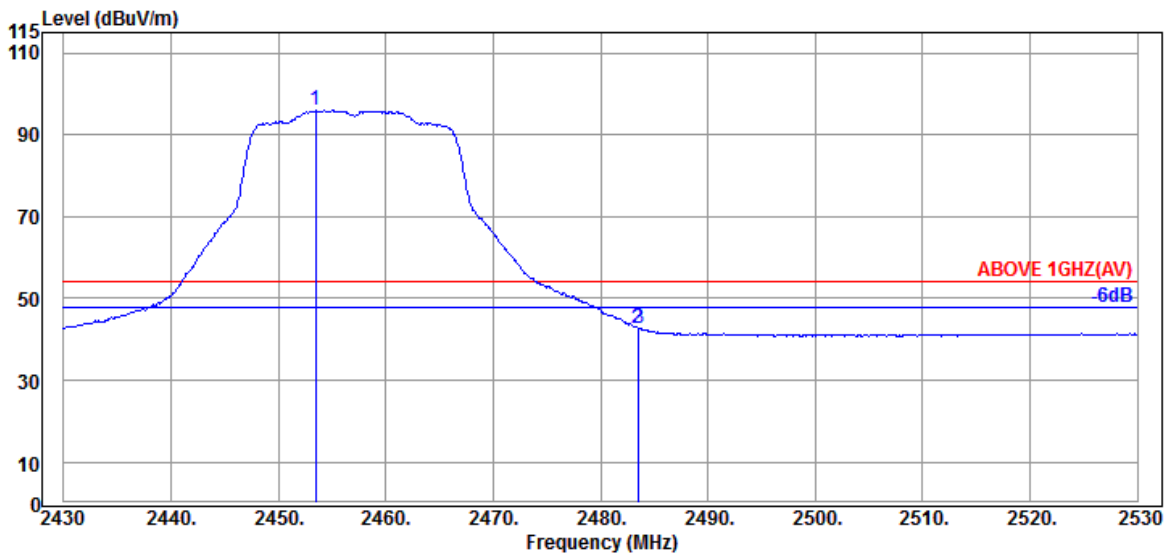


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	32.09	5.83	34.52	92.49	95.89	---	---	Average
2483.500	32.43	5.87	34.53	39.06	42.83	54.00	11.17	Average
2483.600	32.43	5.87	34.53	39.04	42.81	54.00	11.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

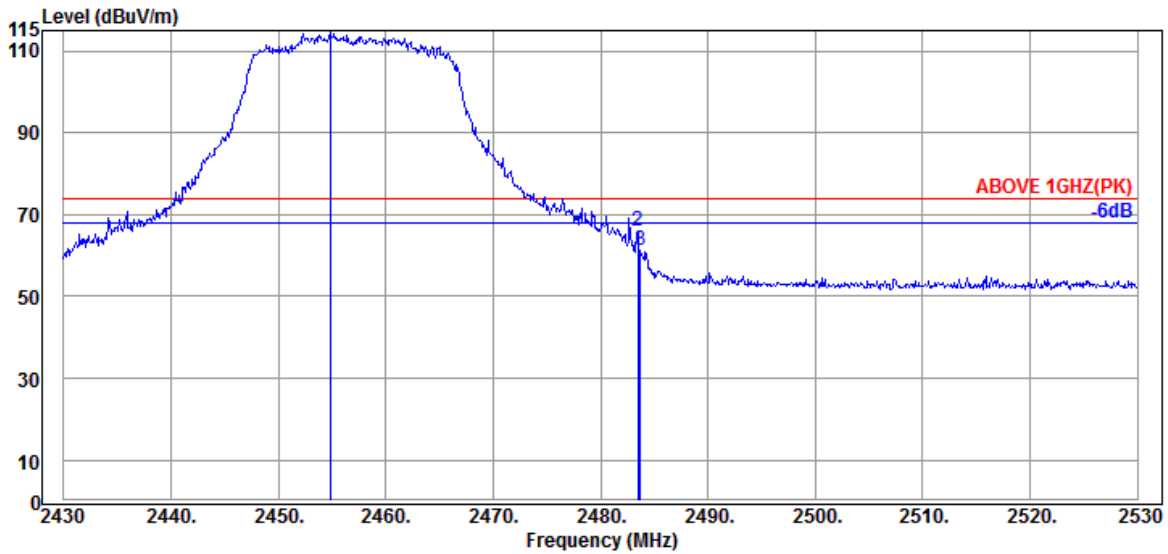

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.800	32.09	5.83	34.52	111.20	114.60	---	---	Peak
2483.500	32.43	5.87	34.53	62.22	65.99	74.00	8.01	Peak
2483.700	32.43	5.87	34.53	57.31	61.08	74.00	12.92	Peak

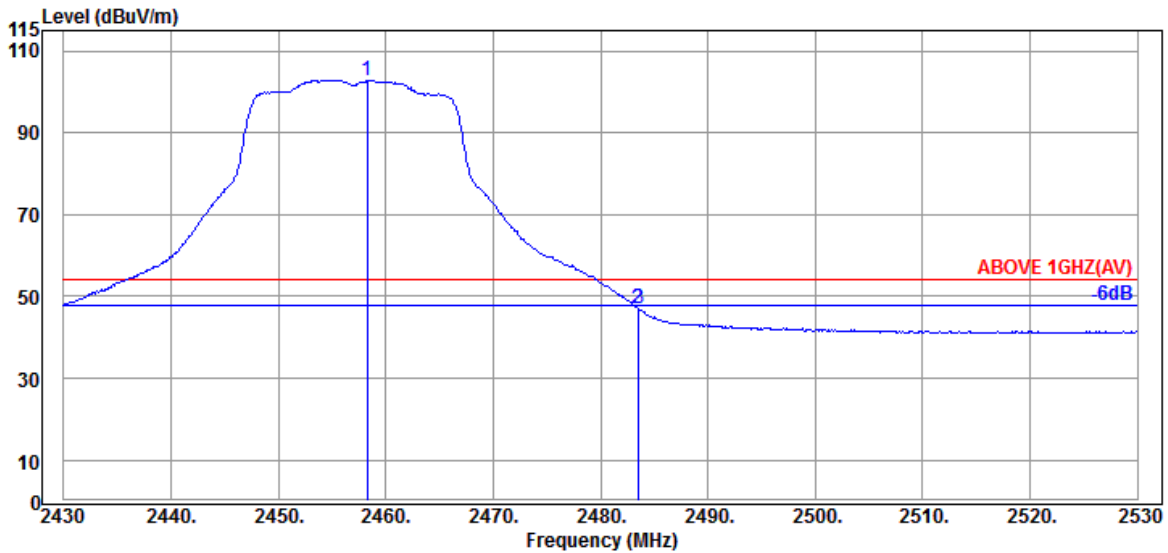


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.300	32.09	5.83	34.52	99.52	102.92	---	---	Average
2483.500	32.43	5.87	34.53	43.40	47.17	54.00	6.83	Average
2483.600	32.43	5.87	34.53	43.23	47.00	54.00	7.00	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

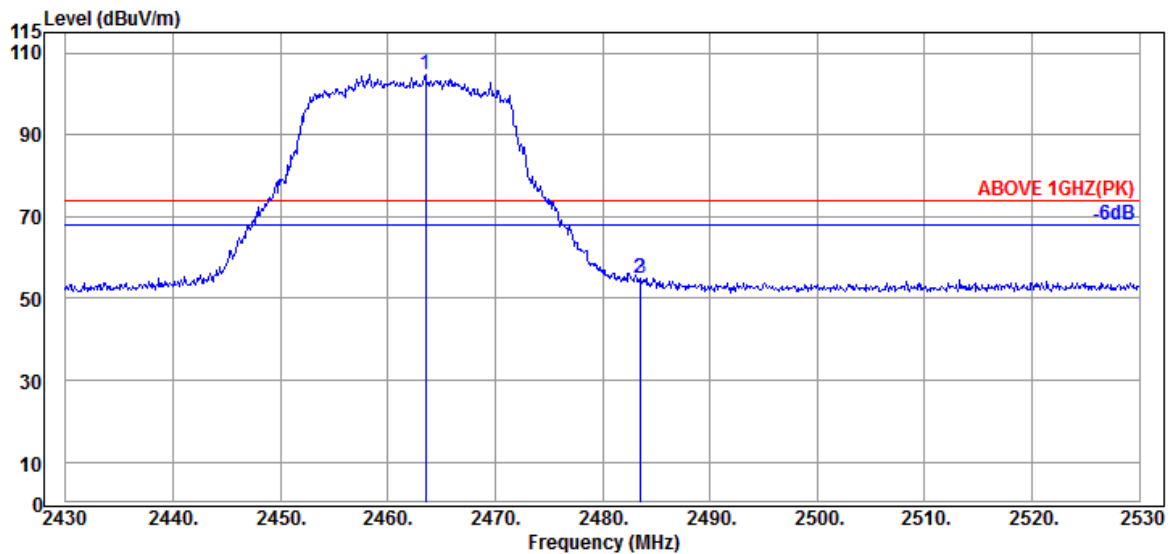

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	32.17	5.84	34.52	101.22	104.71	---	---	Peak
2483.500	32.43	5.87	34.53	50.97	54.74	74.00	19.26	Peak
2483.600	32.43	5.87	34.53	51.16	54.93	74.00	19.07	Peak

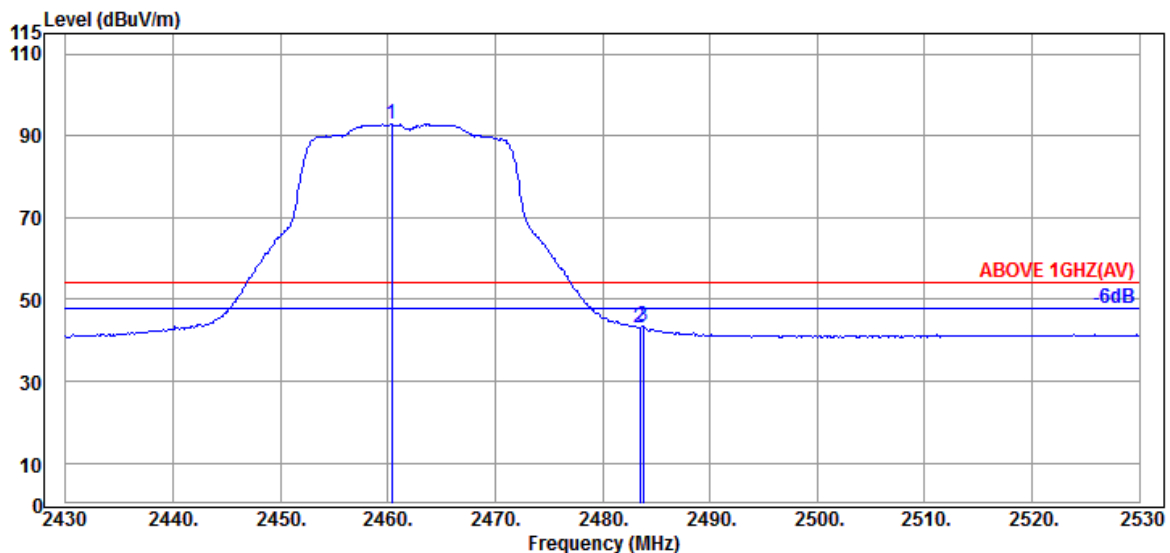


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	32.09	5.83	34.52	89.48	92.88	---	---	Average
2483.500	32.43	5.87	34.53	39.29	43.06	54.00	10.94	Average
2483.800	32.43	5.87	34.53	39.62	43.39	54.00	10.61	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

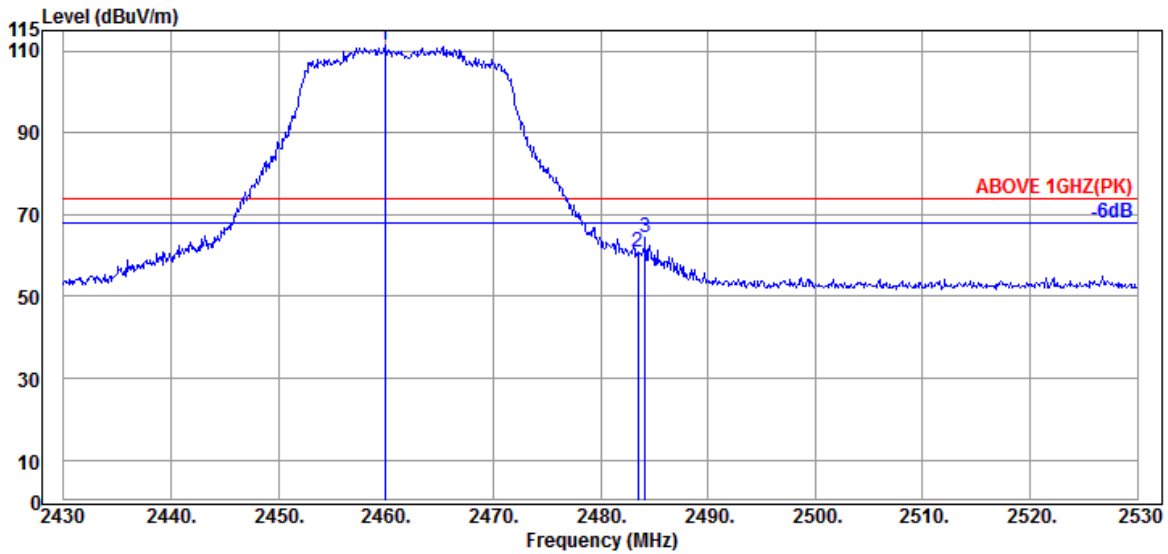

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.900	32.09	5.83	34.52	108.17	111.57	---	---	Peak
2483.500	32.43	5.87	34.53	56.95	60.72	74.00	13.28	Peak
2484.200	32.43	5.87	34.53	60.76	64.53	74.00	9.47	Peak

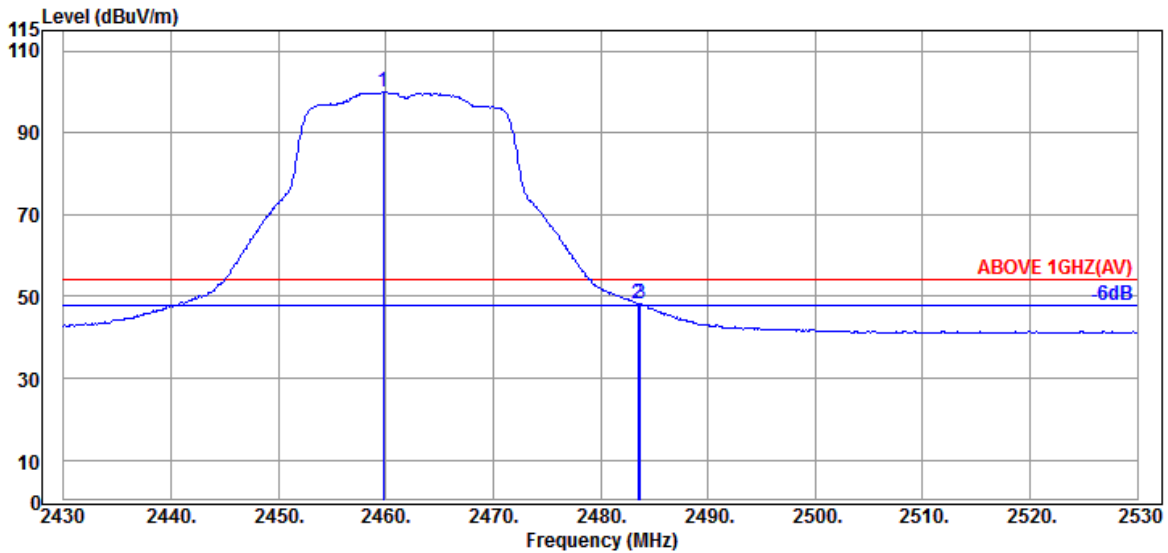


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	32.09	5.83	34.52	96.70	100.10	---	---	Average
2483.500	32.43	5.87	34.53	44.31	48.08	54.00	5.92	Average
2483.700	32.43	5.87	34.53	44.55	48.32	54.00	5.68	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

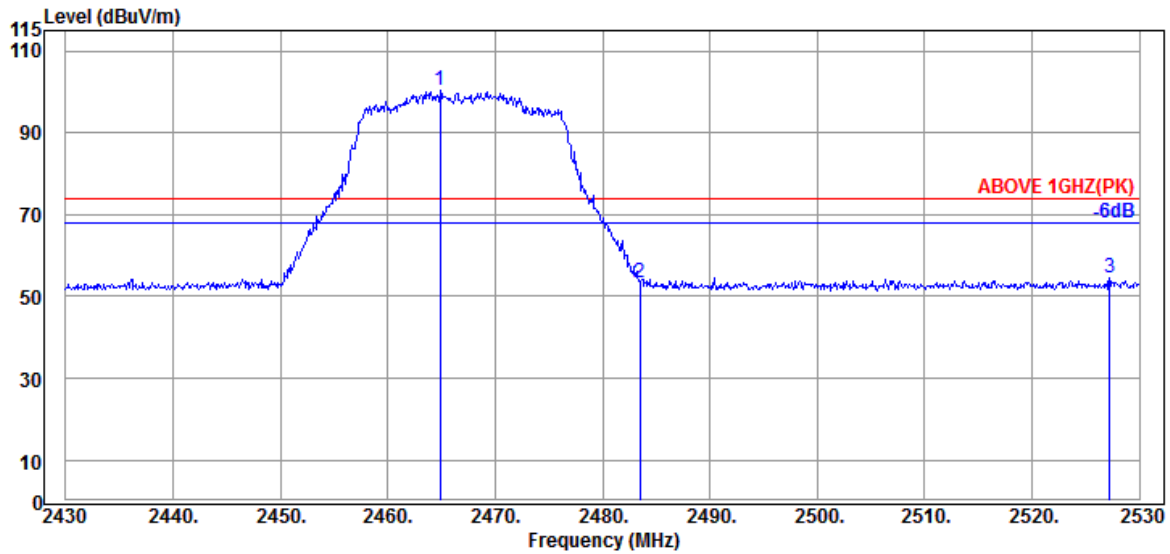

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	32.17	5.84	34.52	96.89	100.38	---	---	Peak
2483.500	32.43	5.87	34.53	49.54	53.31	74.00	20.69	Peak
2527.200	32.49	5.96	34.54	50.60	54.51	74.00	19.49	Peak

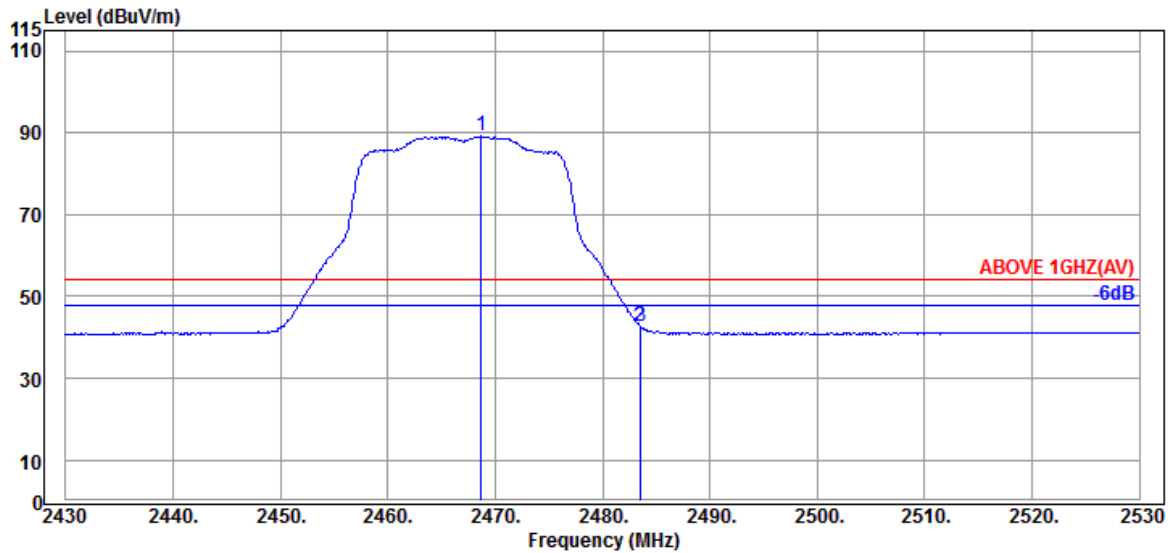


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.700	32.26	5.85	34.52	85.54	89.13	---	---	Average
2483.500	32.43	5.87	34.53	39.11	42.88	54.00	11.12	Average
2483.600	32.43	5.87	34.53	38.87	42.64	54.00	11.36	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

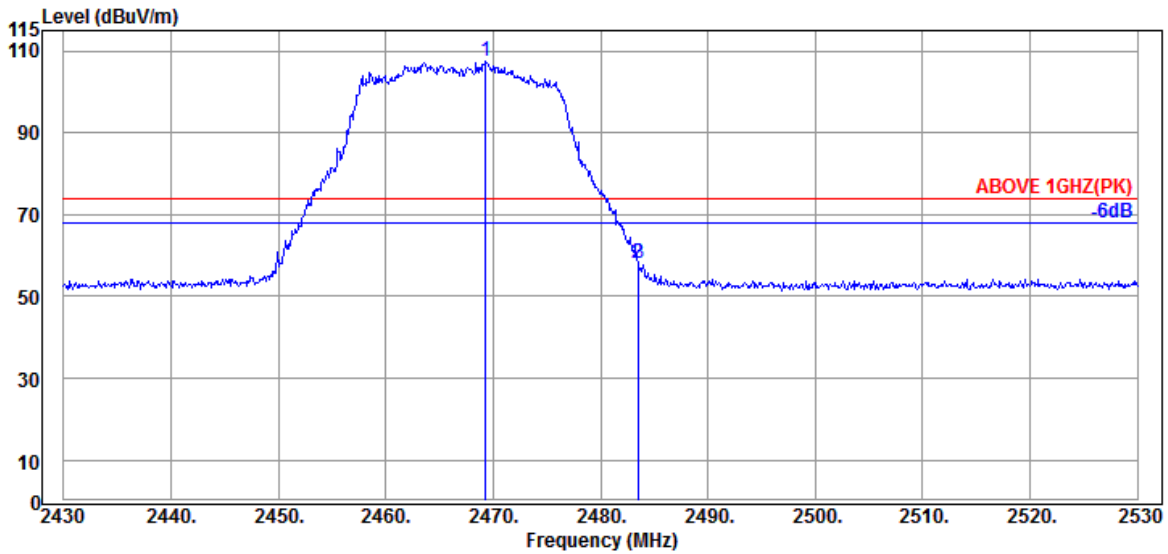

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	32.26	5.85	34.52	103.77	107.36	---	---	Peak
2483.500	32.43	5.87	34.53	54.25	58.02	74.00	15.98	Peak
2483.600	32.43	5.87	34.53	54.32	58.09	74.00	15.91	Peak

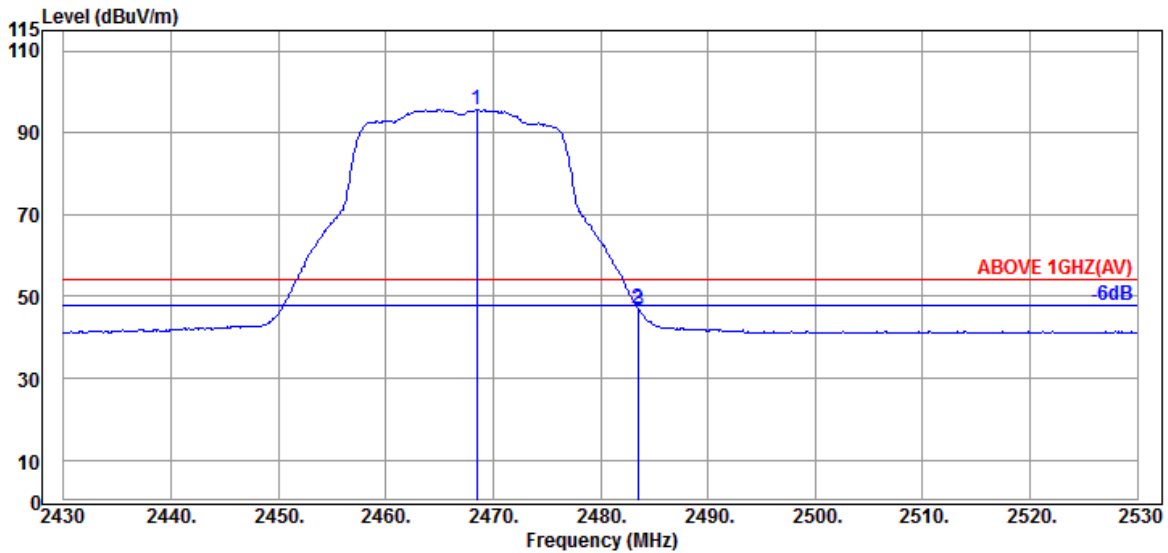


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.26	5.85	34.52	92.10	95.69	---	---	Average
2483.500	32.43	5.87	34.53	43.39	47.16	54.00	6.84	Average
2483.600	32.43	5.87	34.53	42.96	46.73	54.00	7.27	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

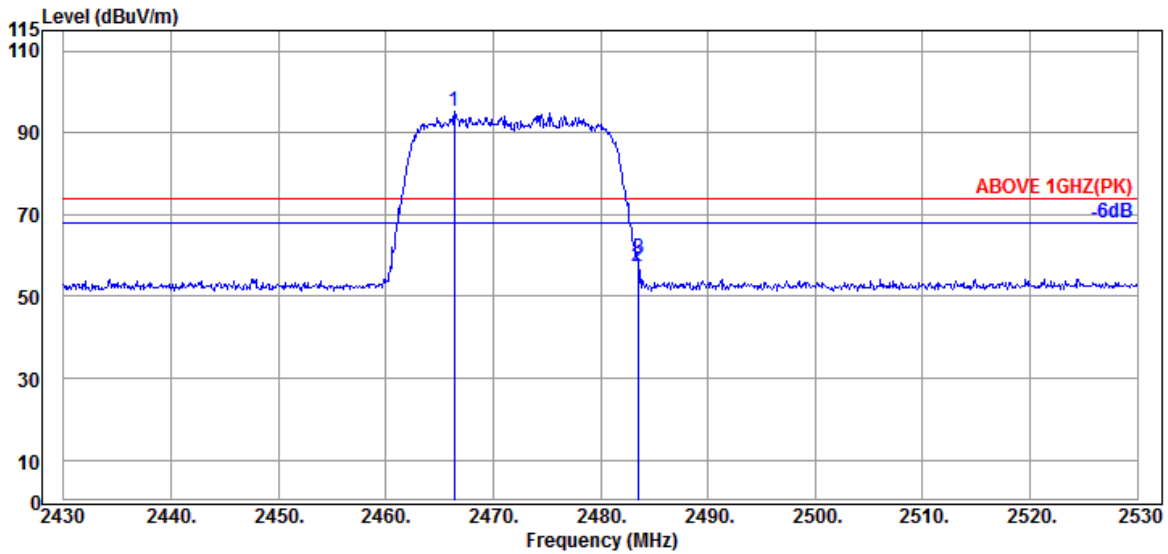

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	32.17	5.84	34.52	91.58	95.07	---	---	Peak
2483.500	32.43	5.87	34.53	53.50	57.27	74.00	16.73	Peak
2483.600	32.43	5.87	34.53	55.56	59.33	74.00	14.67	Peak

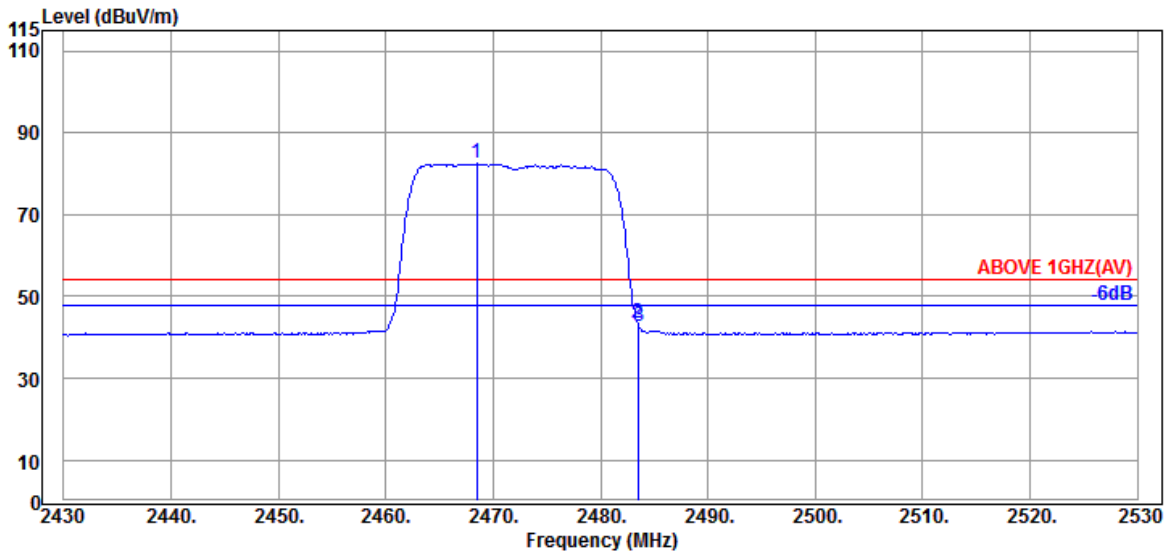


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	32.26	5.85	34.52	78.81	82.40	---	---	Average
2483.500	32.43	5.87	34.53	39.64	43.41	54.00	10.59	Average
2483.600	32.43	5.87	34.53	38.85	42.62	54.00	11.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

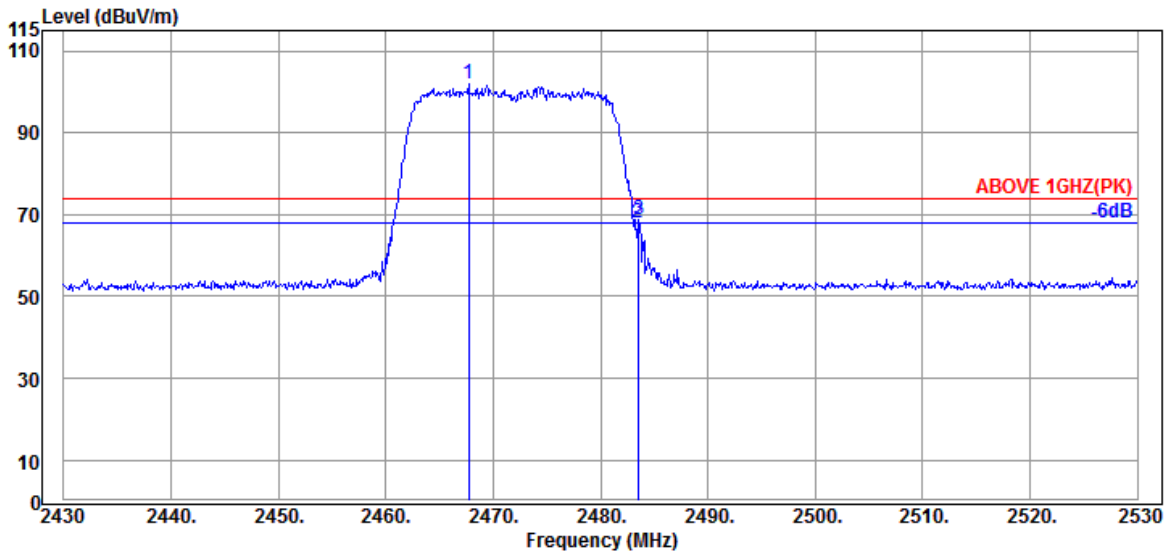

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.700	32.26	5.85	34.52	98.25	101.84	---	---	Peak
2483.500	32.43	5.87	34.53	64.01	67.78	74.00	6.22	Peak
2483.600	32.43	5.87	34.53	64.95	68.72	74.00	5.28	Peak

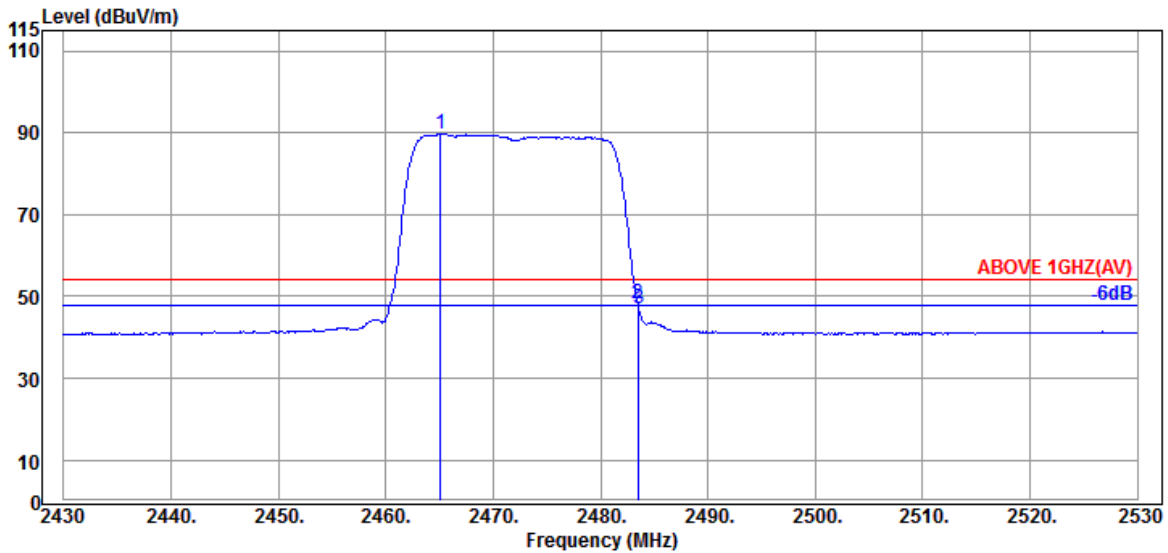


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	32.17	5.84	34.52	86.40	89.89	---	---	Average
2483.500	32.43	5.87	34.53	44.32	48.09	54.00	5.91	Average
2483.600	32.43	5.87	34.53	43.14	46.91	54.00	7.09	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

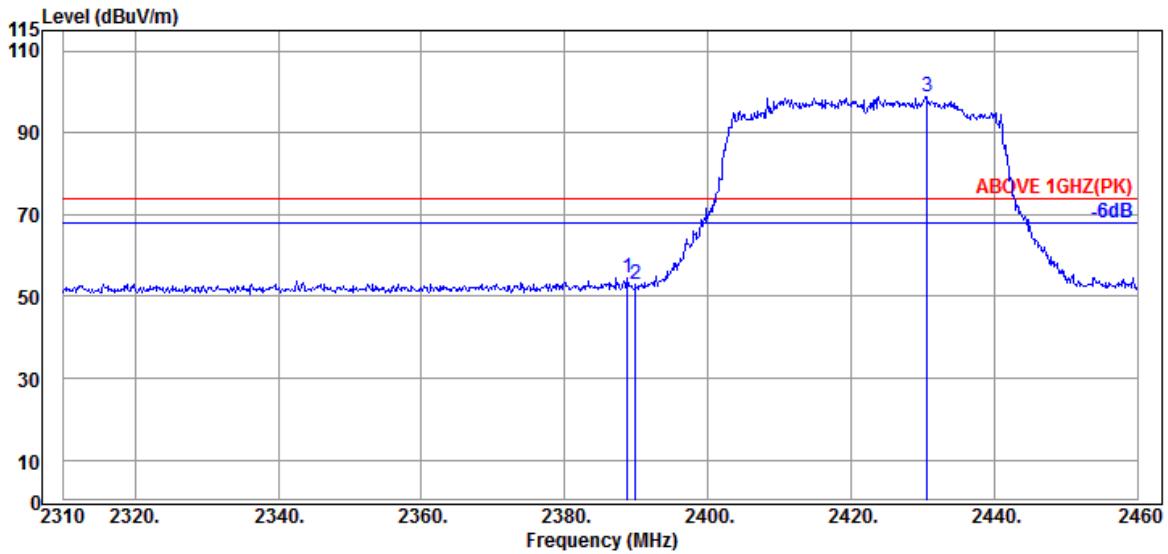

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.750	32.00	5.72	34.51	51.32	54.53	74.00	19.47	Peak
2389.950	32.00	5.72	34.51	49.64	52.85	74.00	21.15	Peak
@ 2430.600	32.00	5.78	34.52	95.47	98.73	---	---	Peak

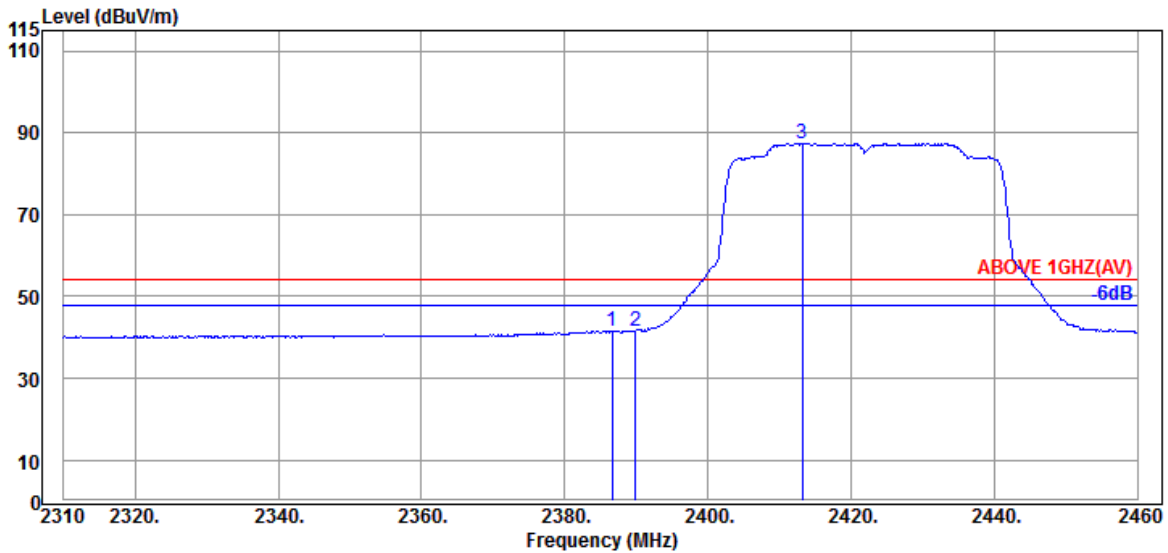


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.650	32.00	5.72	34.51	38.35	41.56	54.00	12.44	Average
2389.950	32.00	5.72	34.51	38.34	41.55	54.00	12.45	Average
@ 2413.200	32.00	5.76	34.51	84.21	87.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

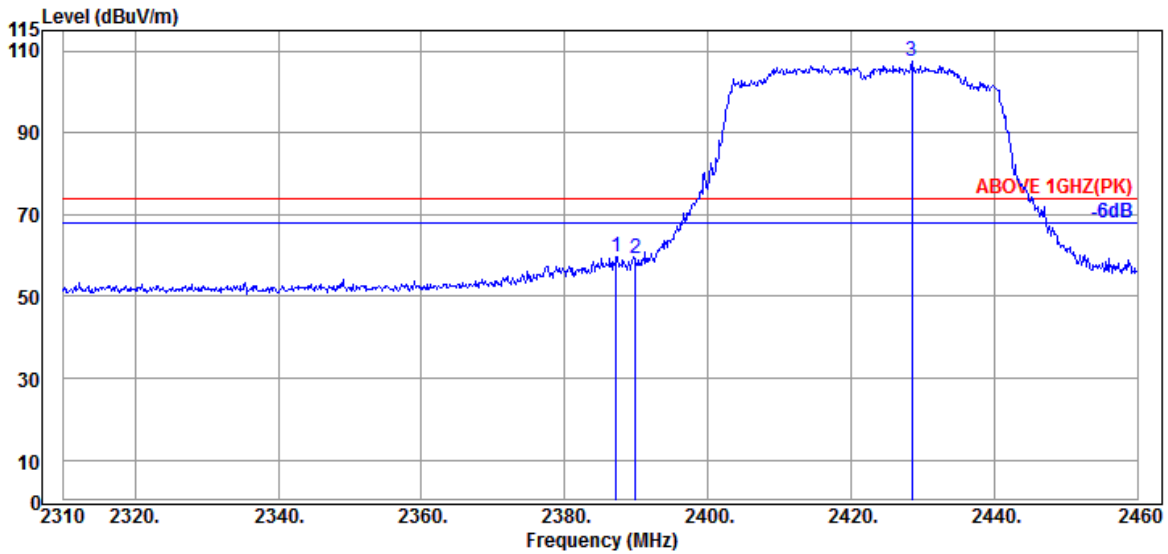

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.250	32.00	5.72	34.51	56.51	59.72	74.00	14.28	Peak
2389.950	32.00	5.72	34.51	55.90	59.11	74.00	14.89	Peak
@ 2428.500	32.00	5.78	34.52	104.05	107.31	---	---	Peak

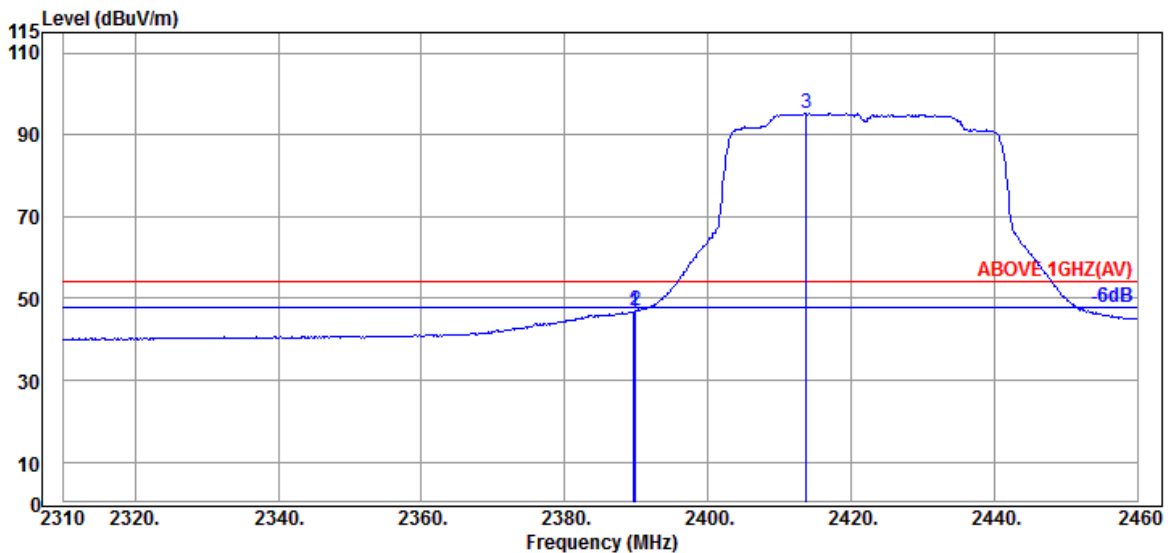


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	32.00	5.72	34.51	43.49	46.70	54.00	7.30	Average
2389.950	32.00	5.72	34.51	43.68	46.89	54.00	7.11	Average
@ 2413.800	32.00	5.76	34.51	92.10	95.35	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

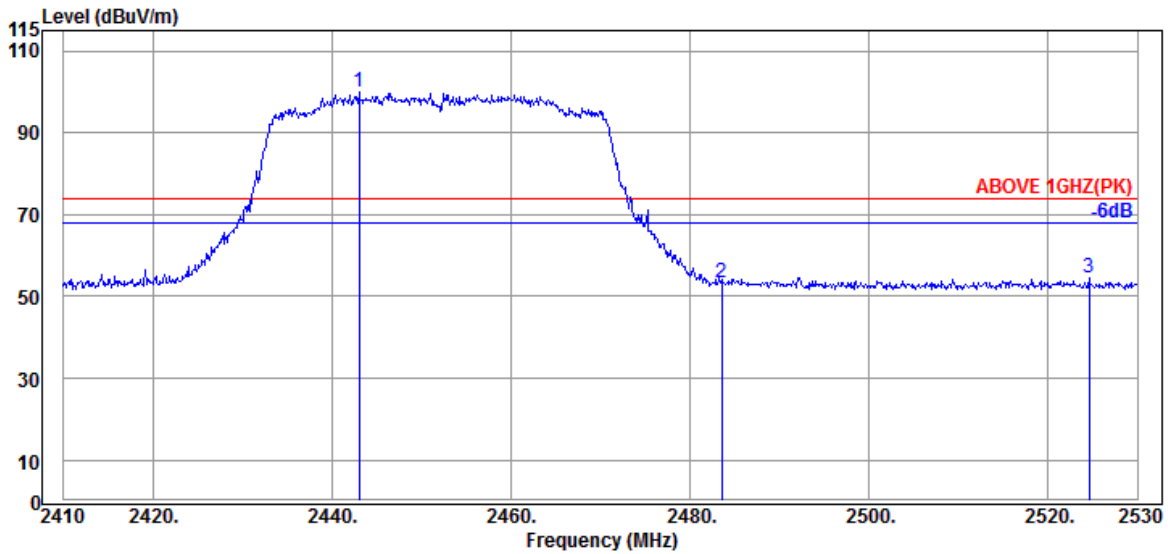

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2443.000	32.00	5.80	34.52	96.82	100.10	---	---	Peak
2483.560	32.43	5.87	34.53	49.53	53.30	74.00	20.70	Peak
2524.600	32.51	5.94	34.54	50.68	54.59	74.00	19.41	Peak

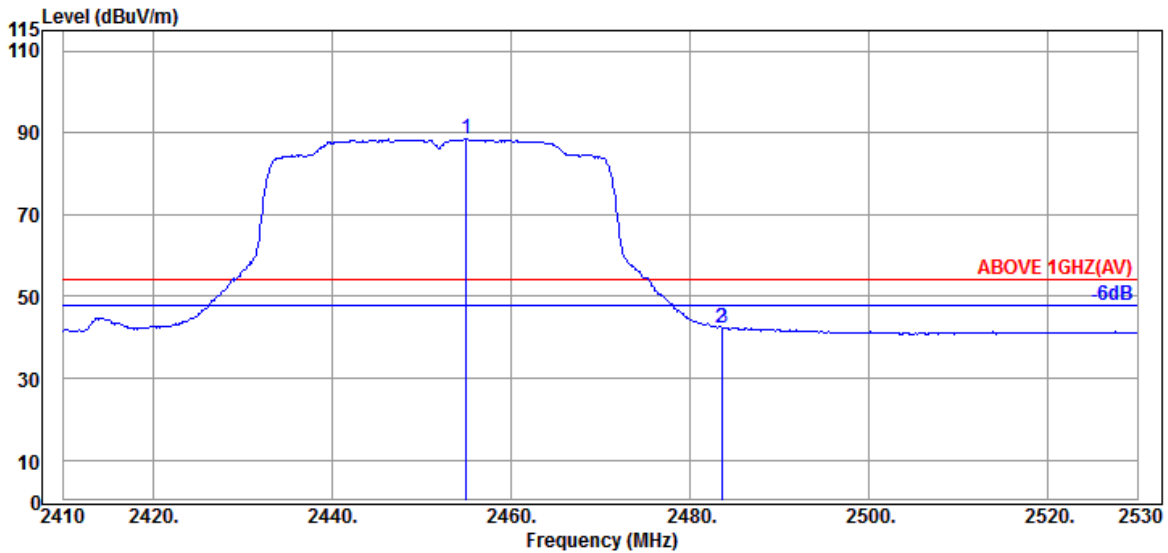


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.000	32.09	5.83	34.52	85.05	88.45	---	---	Average
2483.560	32.43	5.87	34.53	38.58	42.35	54.00	11.65	Average
2483.680	32.43	5.87	34.53	38.64	42.41	54.00	11.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

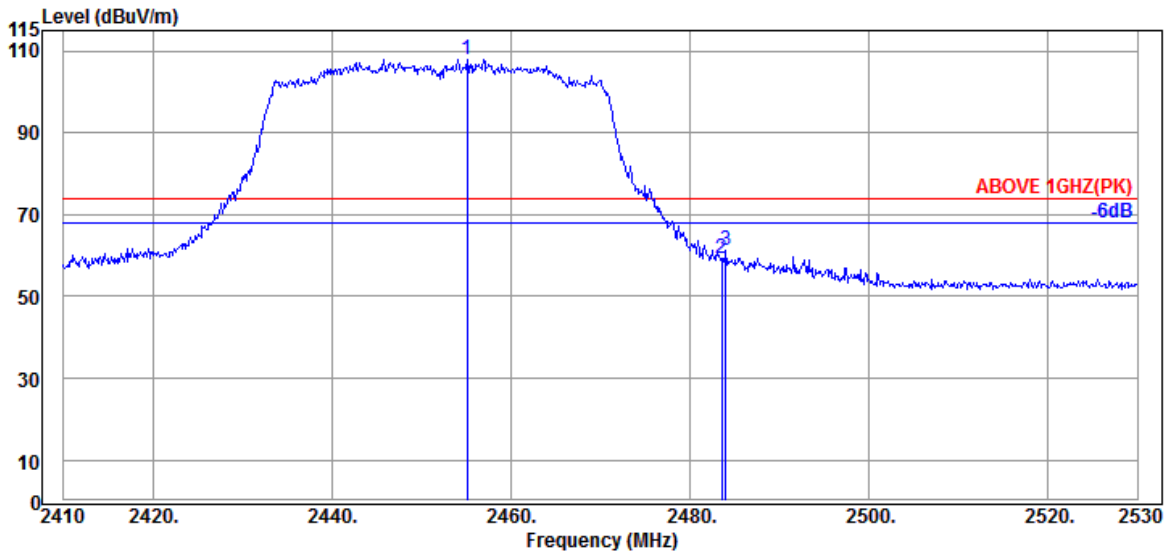

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.120	32.09	5.83	34.52	104.64	108.04	---	---	Peak
2483.560	32.43	5.87	34.53	55.61	59.38	74.00	14.62	Peak
2484.040	32.43	5.87	34.53	57.35	61.12	74.00	12.88	Peak

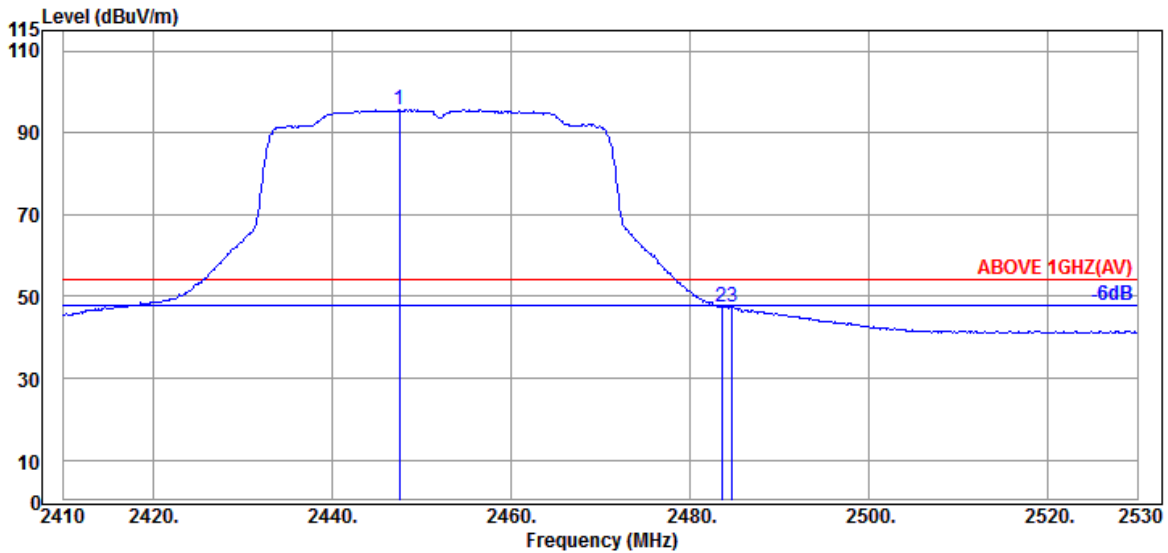


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.560	32.00	5.81	34.52	92.32	95.61	---	---	Average
2483.560	32.43	5.87	34.53	43.84	47.61	54.00	6.39	Average
2484.760	32.43	5.87	34.53	43.74	47.51	54.00	6.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

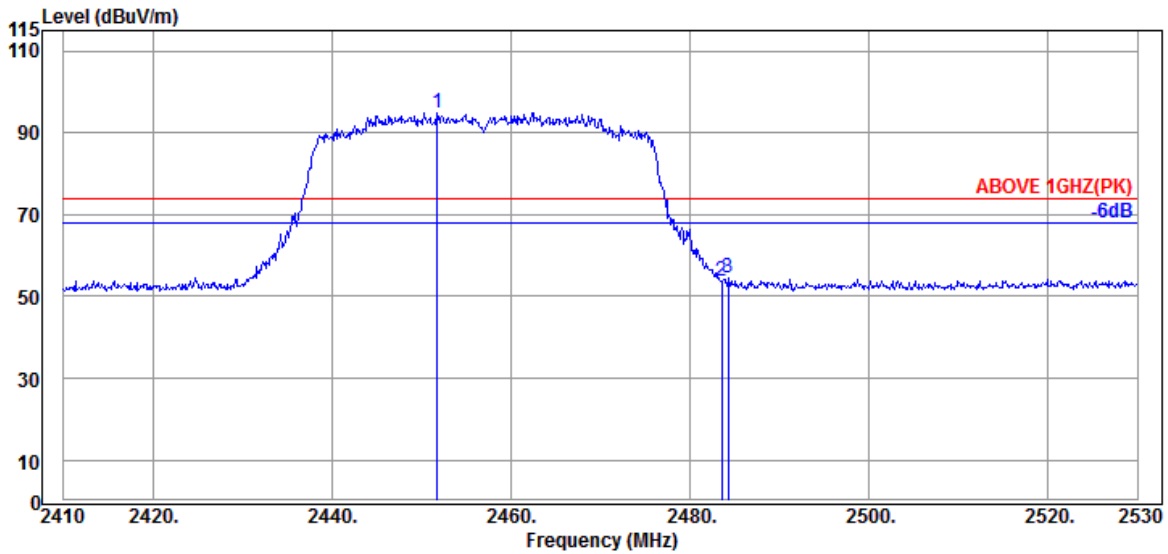

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.760	32.00	5.81	34.52	91.57	94.86	---	---	Peak
2483.560	32.43	5.87	34.53	49.87	53.64	74.00	20.36	Peak
2484.280	32.43	5.87	34.53	50.61	54.38	74.00	19.62	Peak

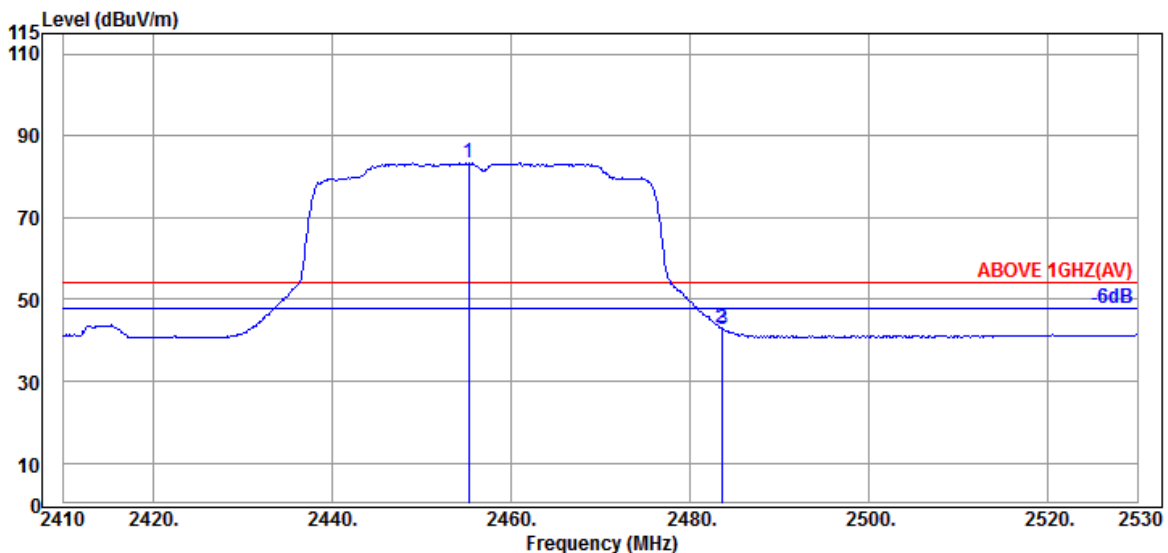


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.240	32.09	5.83	34.52	79.89	83.29	---	---	Average
2483.560	32.43	5.87	34.53	39.29	43.06	54.00	10.94	Average
2483.680	32.43	5.87	34.53	39.09	42.86	54.00	11.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

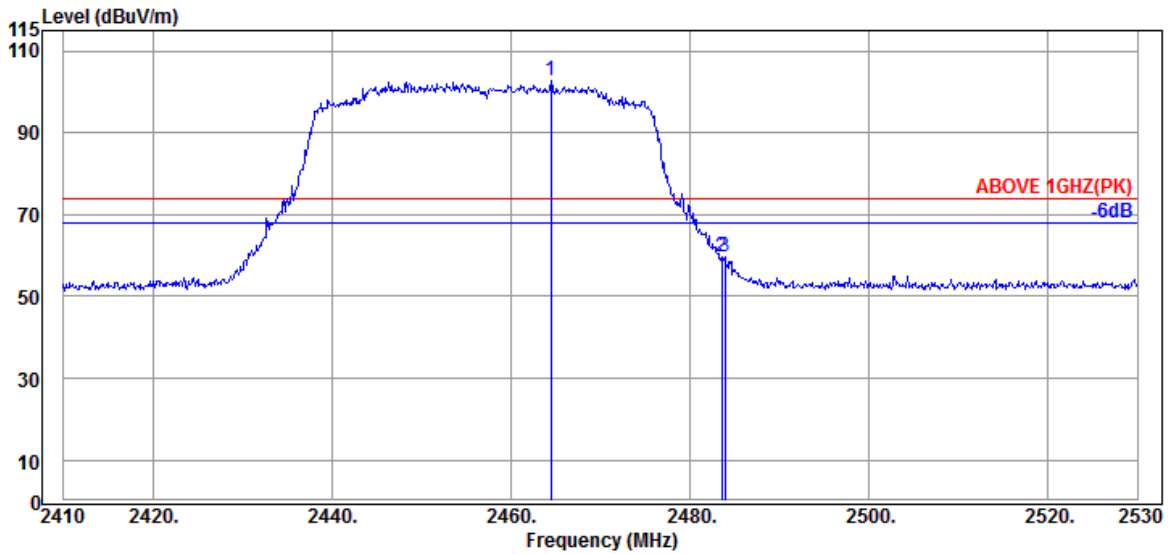

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.480	32.17	5.84	34.52	99.31	102.80	---	---	Peak
2483.560	32.43	5.87	34.53	55.91	59.68	74.00	14.32	Peak
2483.920	32.43	5.87	34.53	55.96	59.73	74.00	14.27	Peak

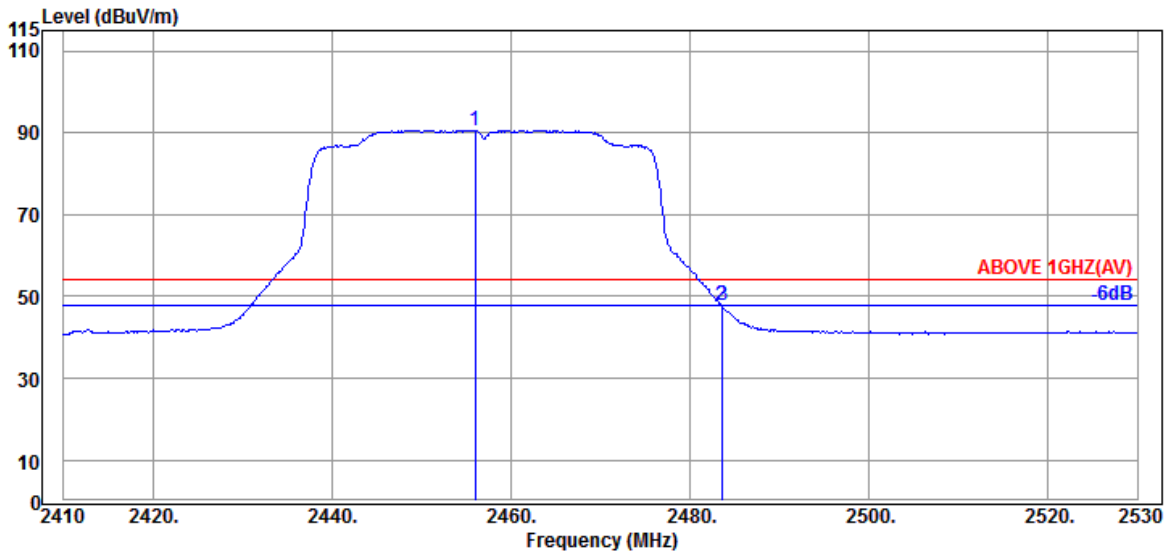


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.960	32.09	5.83	34.52	87.26	90.66	---	---	Average
2483.560	32.43	5.87	34.53	43.97	47.74	54.00	6.26	Average
2483.680	32.43	5.87	34.53	43.94	47.71	54.00	6.29	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

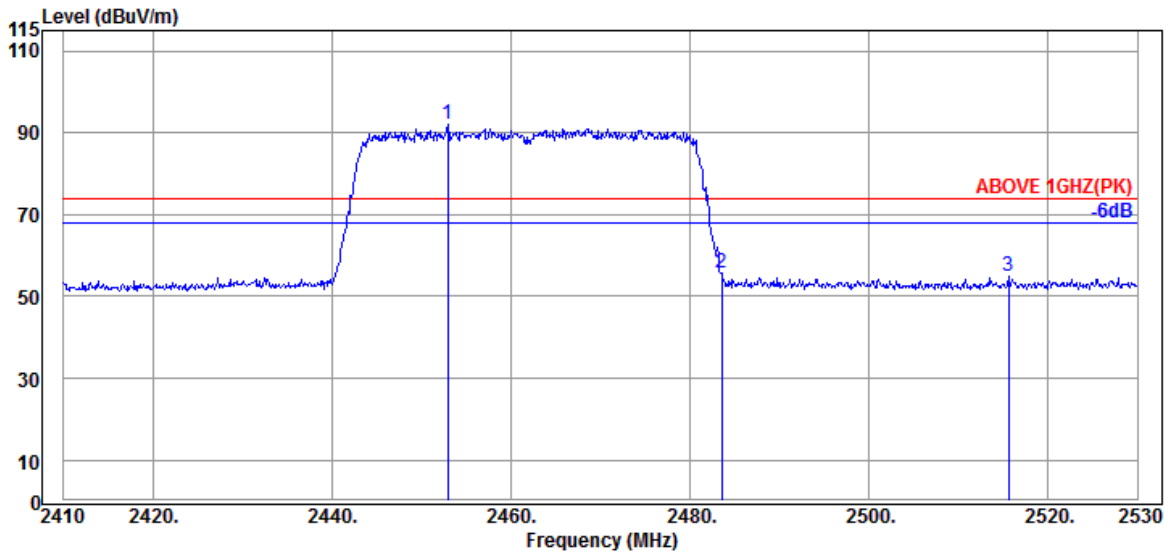

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2452.960	32.00	5.81	34.52	88.85	92.14	---	---	Peak
2483.560	32.43	5.87	34.53	51.97	55.74	74.00	18.26	Peak
2515.600	32.54	5.93	34.53	50.84	54.78	74.00	19.22	Peak

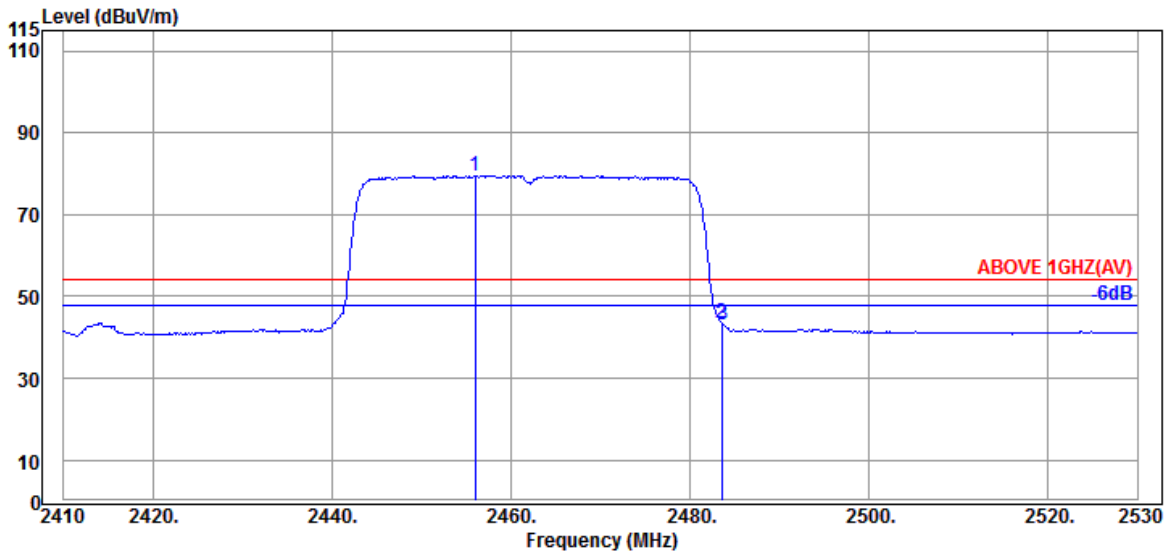


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.960	32.09	5.83	34.52	76.11	79.51	---	---	Average
2483.560	32.43	5.87	34.53	39.81	43.58	54.00	10.42	Average
2483.680	32.43	5.87	34.53	39.49	43.26	54.00	10.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

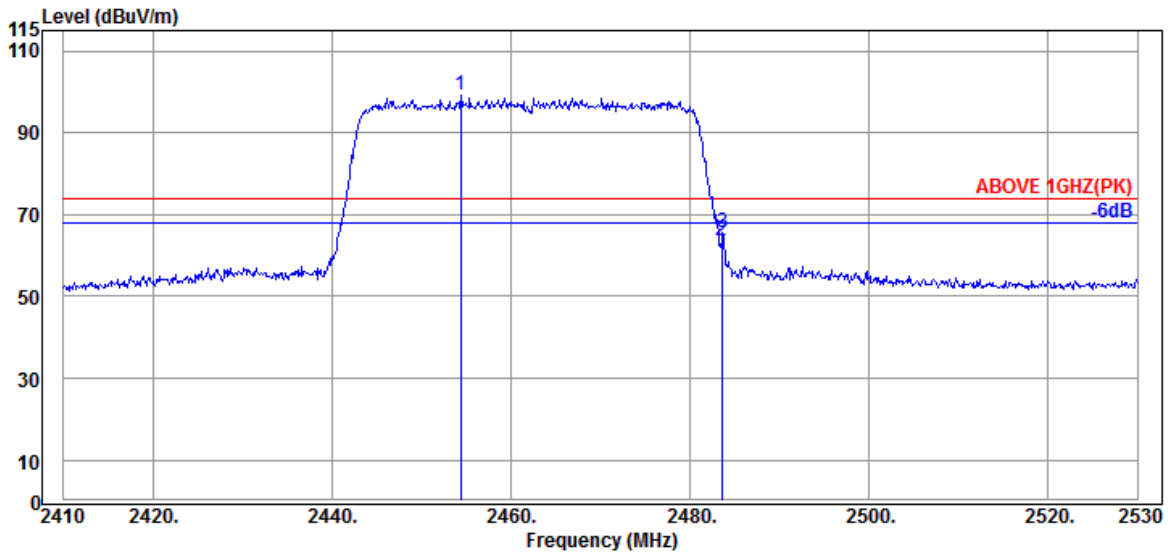

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.400	32.09	5.83	34.52	95.69	99.09	---	---	Peak
2483.560	32.43	5.87	34.53	59.96	63.73	74.00	10.27	Peak
2483.680	32.43	5.87	34.53	61.64	65.41	74.00	8.59	Peak

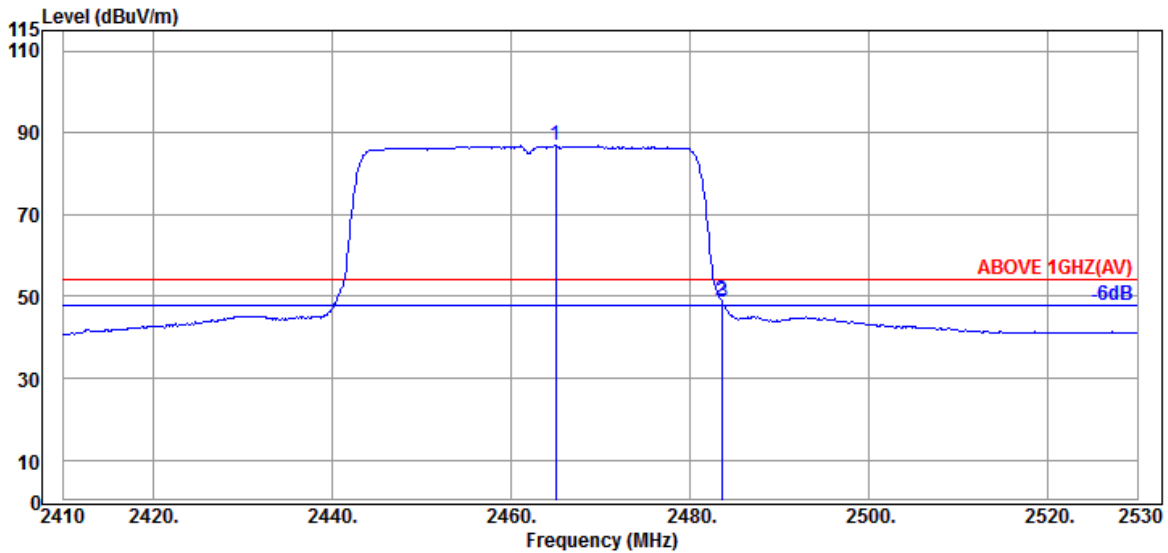


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.960	32.17	5.84	34.52	83.43	86.92	---	---	Average
2483.560	32.43	5.87	34.53	45.16	48.93	54.00	5.07	Average
2483.680	32.43	5.87	34.53	44.89	48.66	54.00	5.34	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

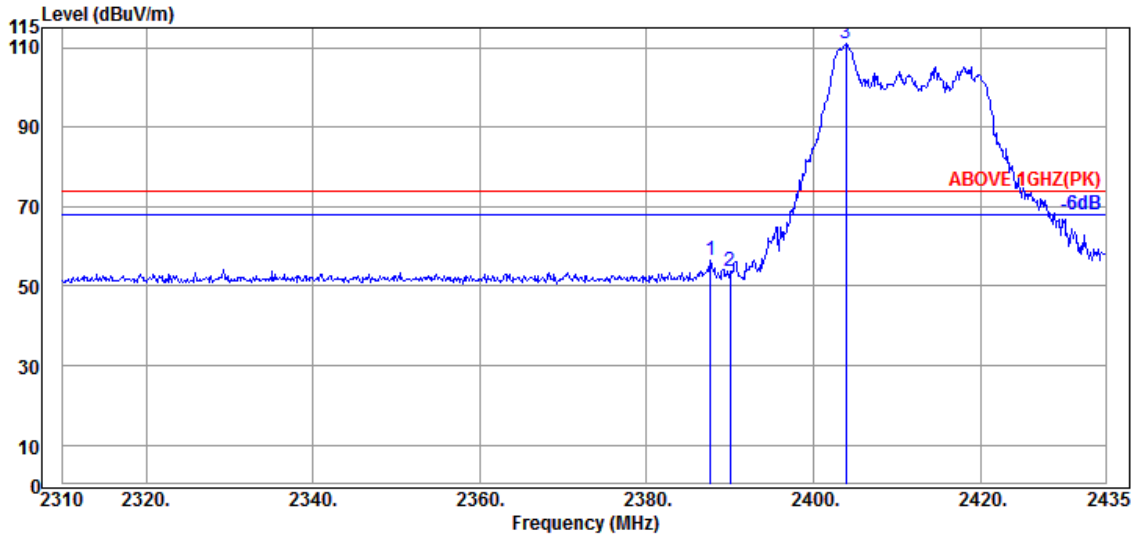

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.625	32.00	5.72	34.51	53.20	56.41	74.00	17.59	Peak
2390.000	32.00	5.72	34.51	50.40	53.61	74.00	20.39	Peak
@ 2403.875	32.00	5.74	34.51	107.65	110.88	---	---	Peak

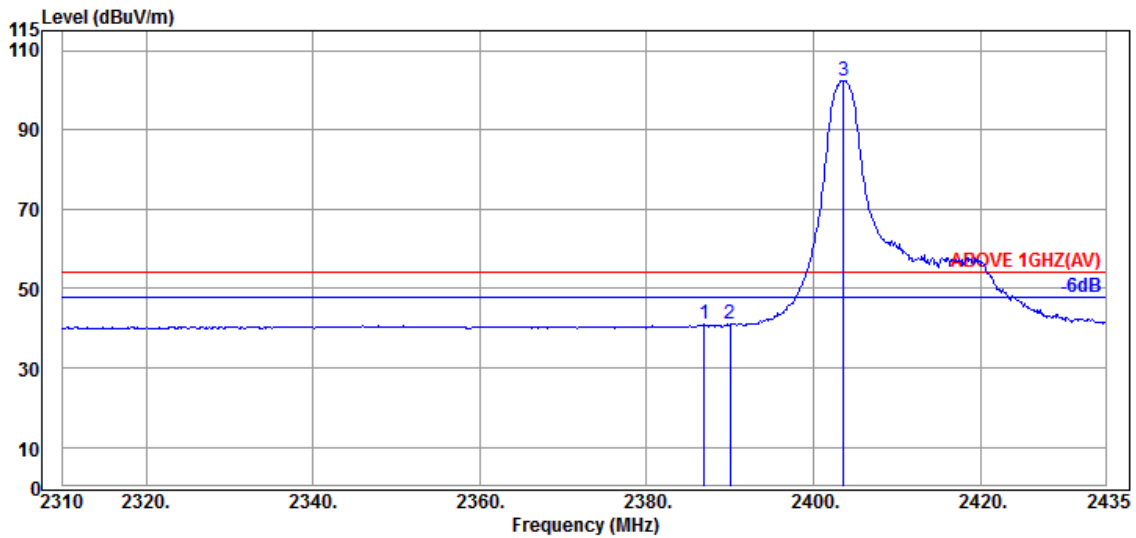


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.875	32.00	5.72	34.51	37.80	41.01	54.00	12.99	Average
2390.000	32.00	5.72	34.51	37.76	40.97	54.00	13.03	Average
@ 2403.625	32.00	5.74	34.51	99.28	102.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

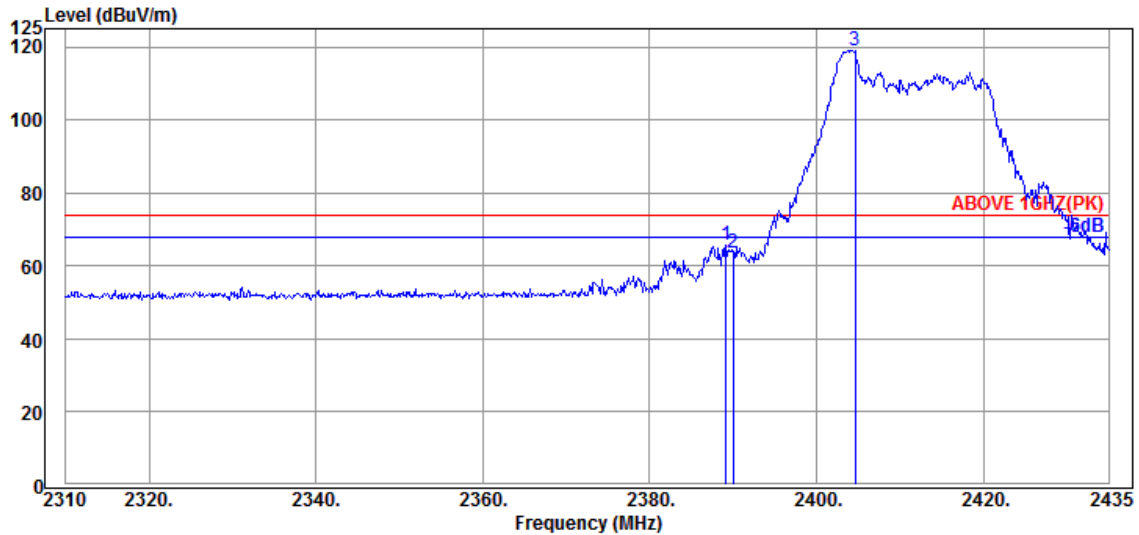

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.125	32.00	5.72	34.51	62.35	65.56	74.00	8.44	Peak
2390.000	32.00	5.72	34.51	60.43	63.64	74.00	10.36	Peak
@ 2404.625	32.00	5.75	34.51	115.74	118.98	---	---	Peak

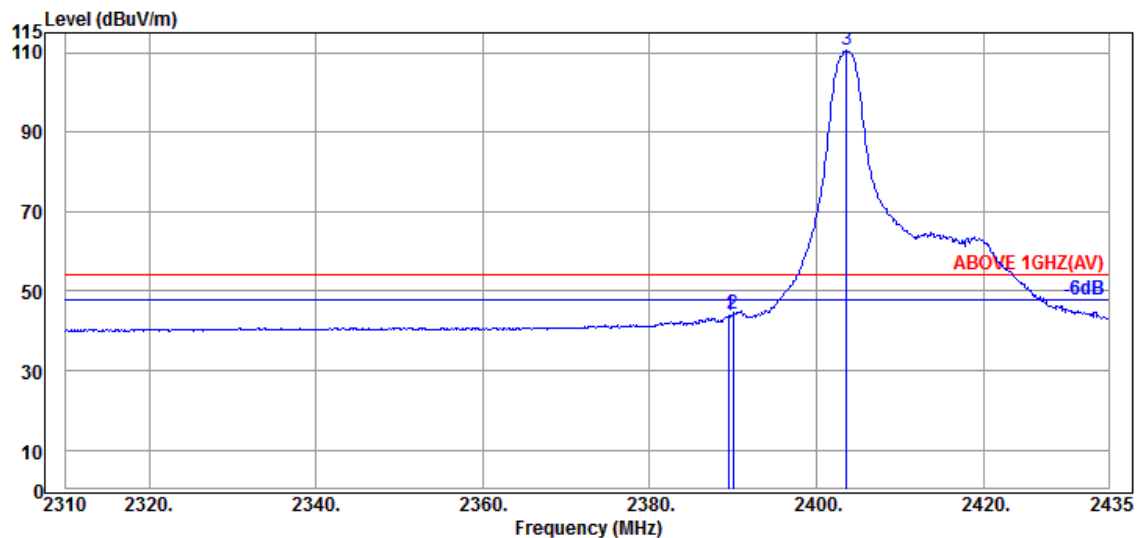


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	40.85	44.06	54.00	9.94	Average
2390.000	32.00	5.72	34.51	40.94	44.15	54.00	9.85	Average
@ 2403.625	32.00	5.74	34.51	107.44	110.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

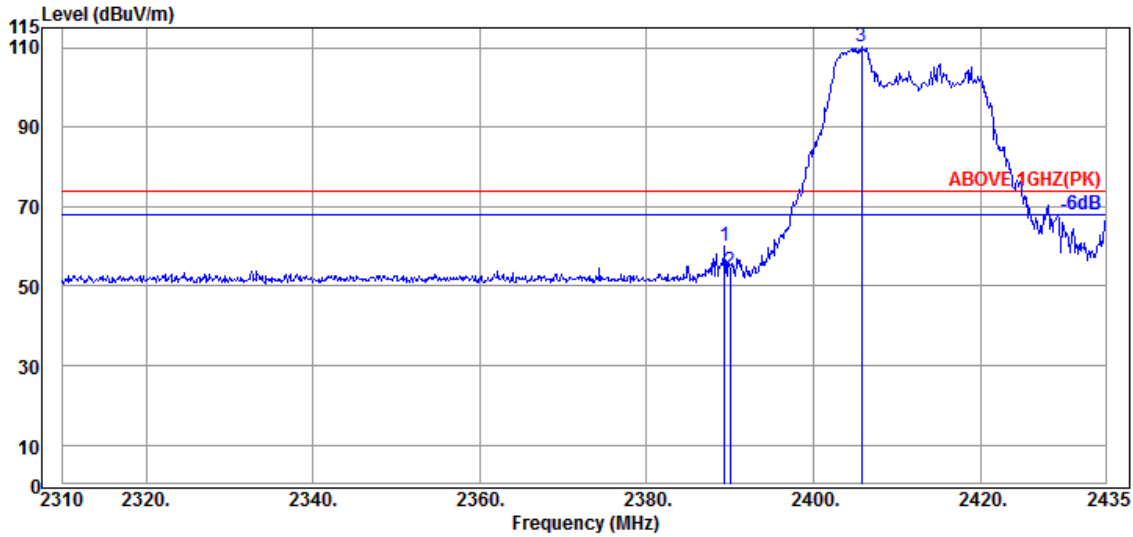

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	32.00	5.72	34.51	56.87	60.08	74.00	13.92	Peak
2390.000	32.00	5.72	34.51	50.34	53.55	74.00	20.45	Peak
@ 2405.750	32.00	5.75	34.51	106.90	110.14	---	---	Peak

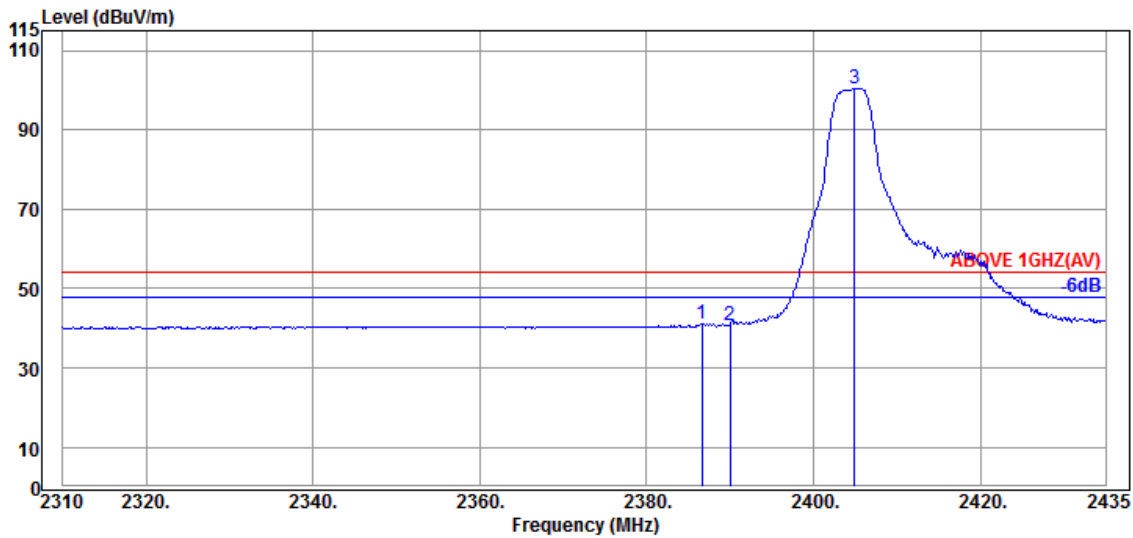


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.625	32.00	5.72	34.51	37.96	41.17	54.00	12.83	Average
2390.000	32.00	5.72	34.51	37.55	40.76	54.00	13.24	Average
@ 2404.875	32.00	5.75	34.51	97.33	100.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

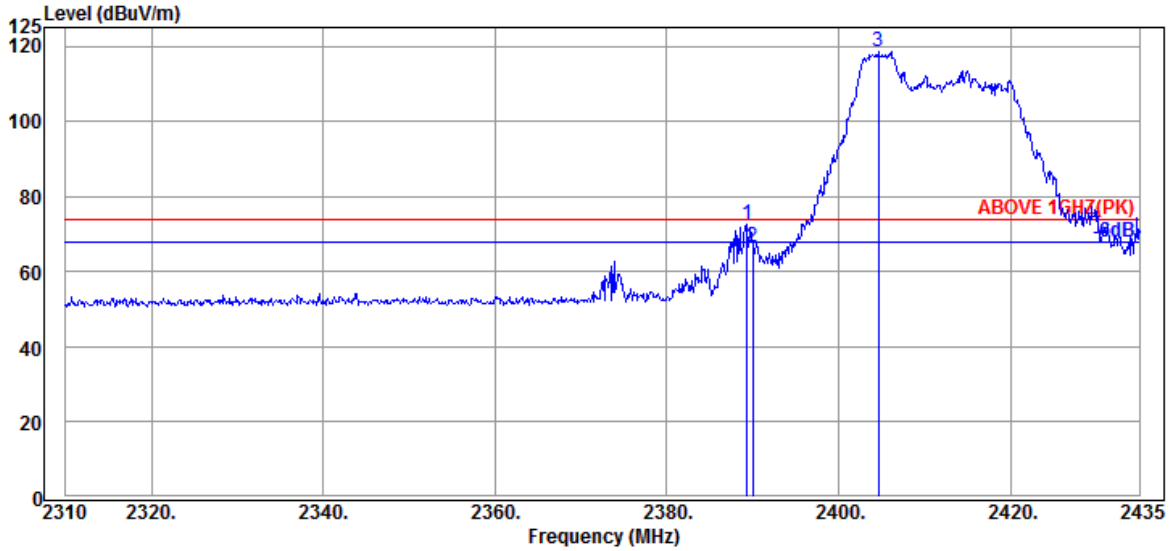

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	32.00	5.72	34.51	69.22	72.43	74.00	1.57	Peak
2390.000	32.00	5.72	34.51	63.35	66.56	74.00	7.44	Peak
@ 2404.625	32.00	5.75	34.51	115.41	118.65	---	---	Peak

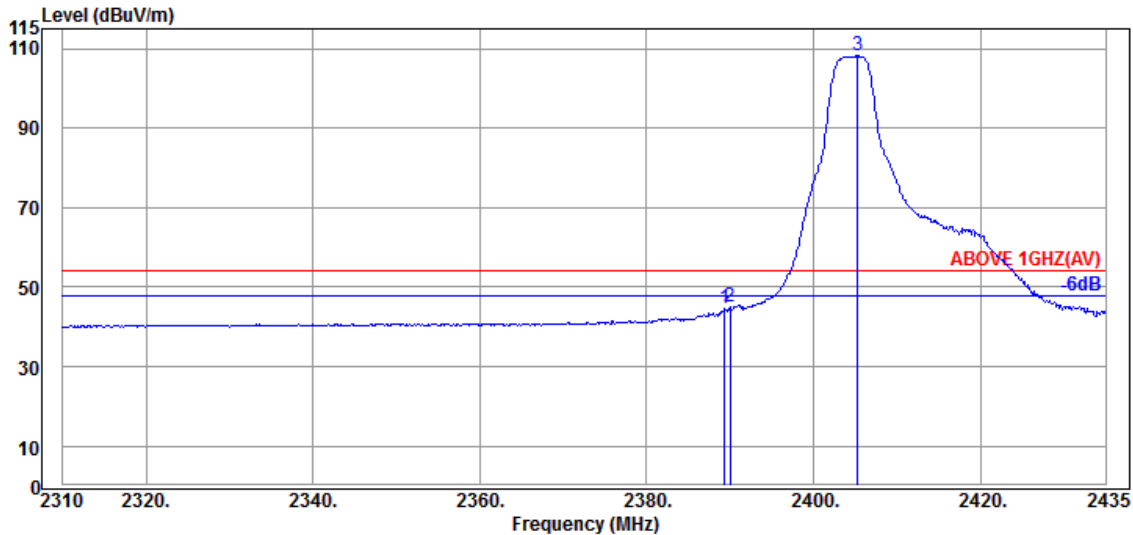


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.375	32.00	5.72	34.51	41.38	44.59	54.00	9.41	Average
2390.000	32.00	5.72	34.51	41.66	44.87	54.00	9.13	Average
@ 2405.250	32.00	5.75	34.51	104.93	108.17	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

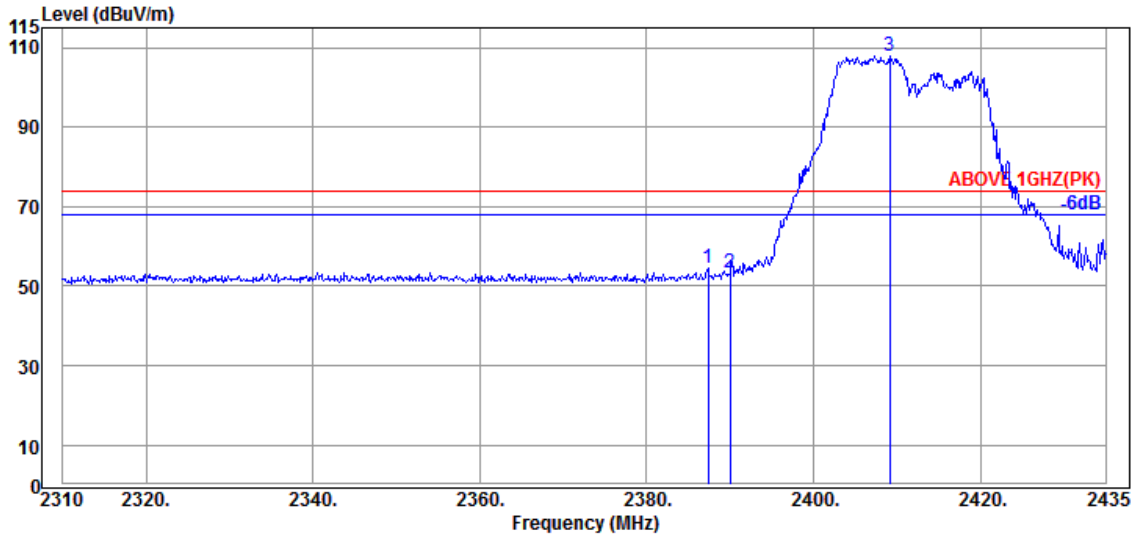

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.375	32.00	5.72	34.51	51.28	54.49	74.00	19.51	Peak
2390.000	32.00	5.72	34.51	50.23	53.44	74.00	20.56	Peak
@ 2409.125	32.00	5.75	34.51	104.61	107.85	---	---	Peak

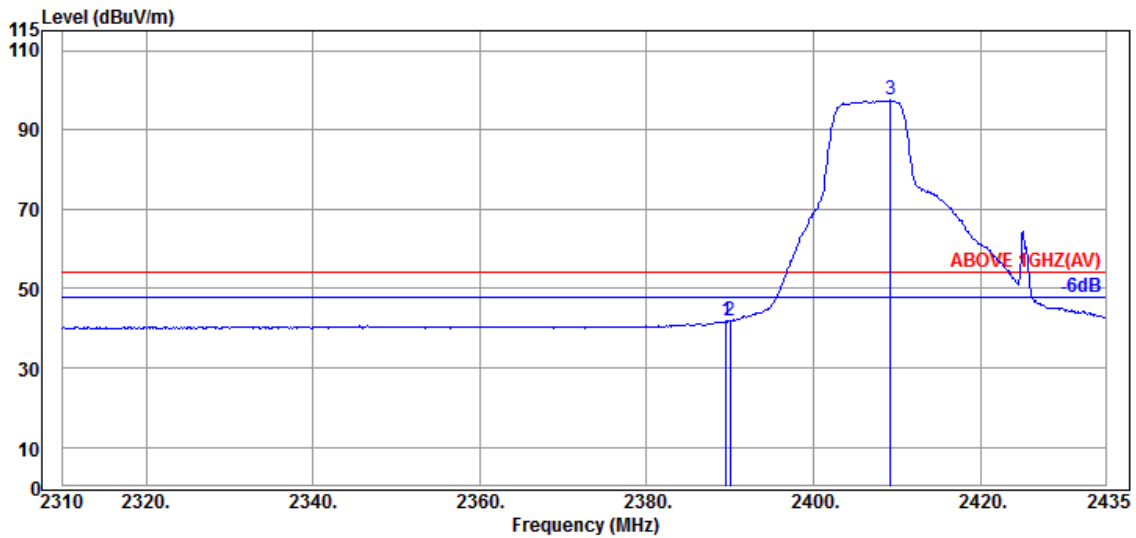


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	38.52	41.73	54.00	12.27	Average
2390.000	32.00	5.72	34.51	38.65	41.86	54.00	12.14	Average
@ 2409.250	32.00	5.75	34.51	94.27	97.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

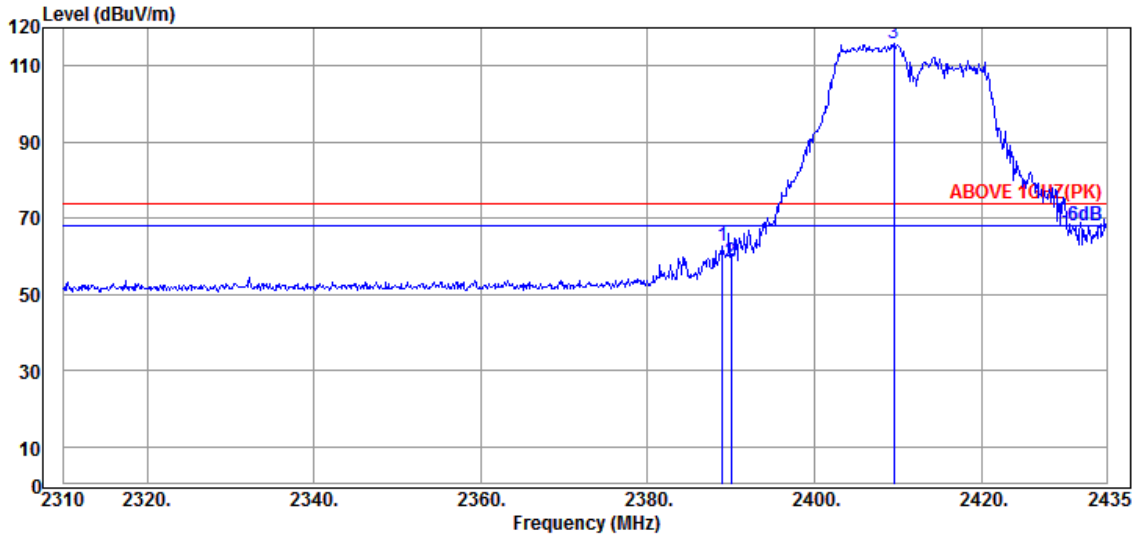

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	32.00	5.72	34.51	59.37	62.58	74.00	11.42	Peak
2390.000	32.00	5.72	34.51	55.22	58.43	74.00	15.57	Peak
@ 2409.500	32.00	5.75	34.51	112.84	116.08	---	---	Peak

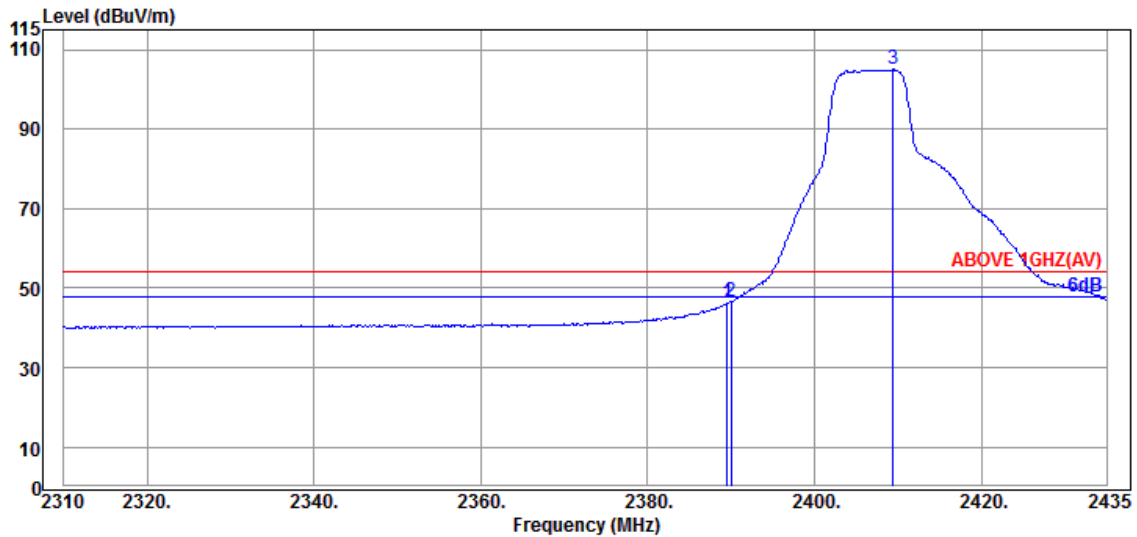


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	43.15	46.36	54.00	7.64	Average
2390.000	32.00	5.72	34.51	43.61	46.82	54.00	7.18	Average
@ 2409.375	32.00	5.75	34.51	101.76	105.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

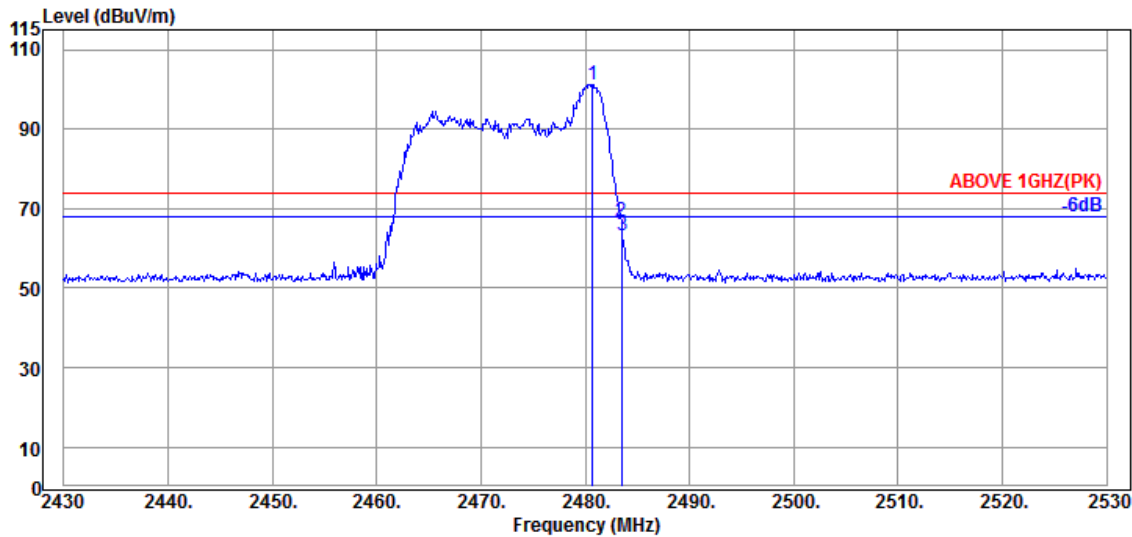

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.700	32.34	5.86	34.53	97.62	101.29	---	---	Peak
2483.500	32.43	5.87	34.53	63.18	66.95	74.00	7.05	Peak
2483.600	32.43	5.87	34.53	59.57	63.34	74.00	10.66	Peak

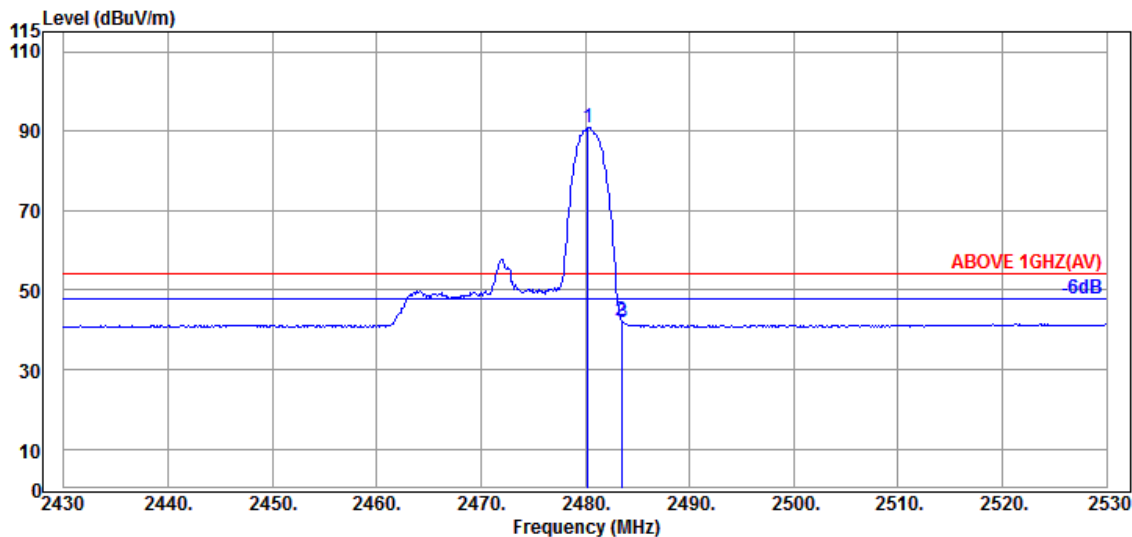


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	32.34	5.86	34.53	87.19	90.86	---	---	Average
2483.500	32.43	5.87	34.53	38.69	42.46	54.00	11.54	Average
2483.600	32.43	5.87	34.53	38.31	42.08	54.00	11.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

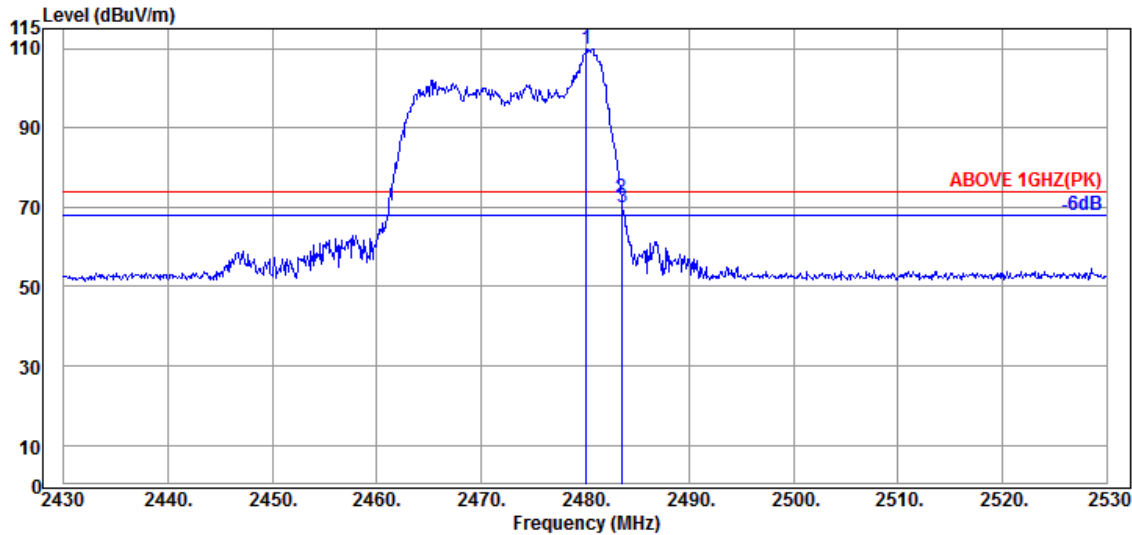

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.34	5.86	34.53	106.29	109.96	---	---	Peak
2483.500	32.43	5.87	34.53	68.68	72.45	74.00	1.55	Peak
2483.600	32.43	5.87	34.53	66.28	70.05	74.00	3.95	Peak

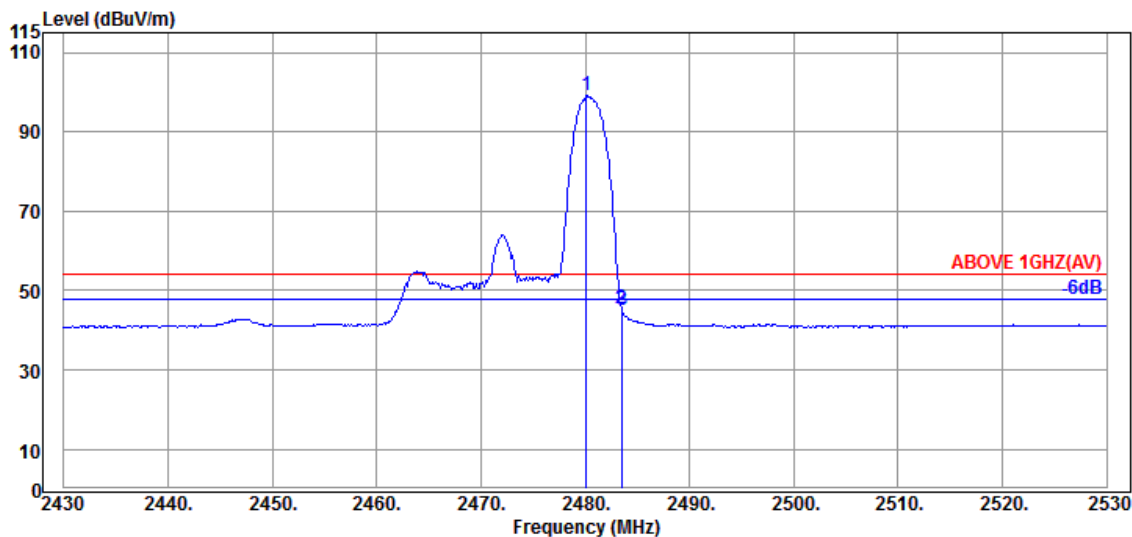


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.34	5.86	34.53	95.40	99.07	---	---	Average
2483.500	32.43	5.87	34.53	41.73	45.50	54.00	8.50	Average
2483.600	32.43	5.87	34.53	41.16	44.93	54.00	9.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

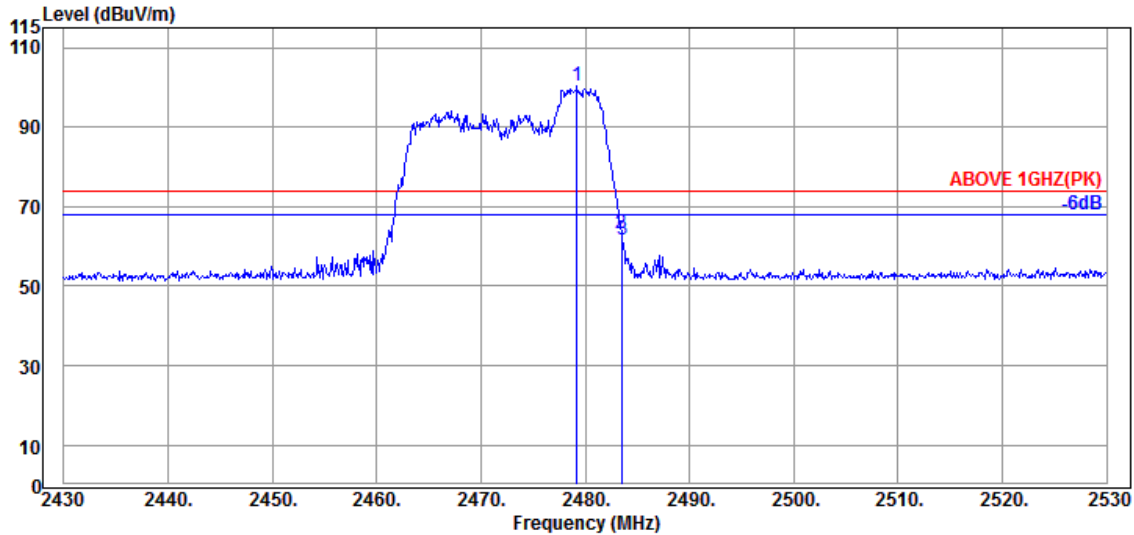

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	32.34	5.86	34.53	96.64	100.31	---	---	Peak
2483.500	32.43	5.87	34.53	59.61	63.38	74.00	10.62	Peak
2483.600	32.43	5.87	34.53	57.73	61.50	74.00	12.50	Peak

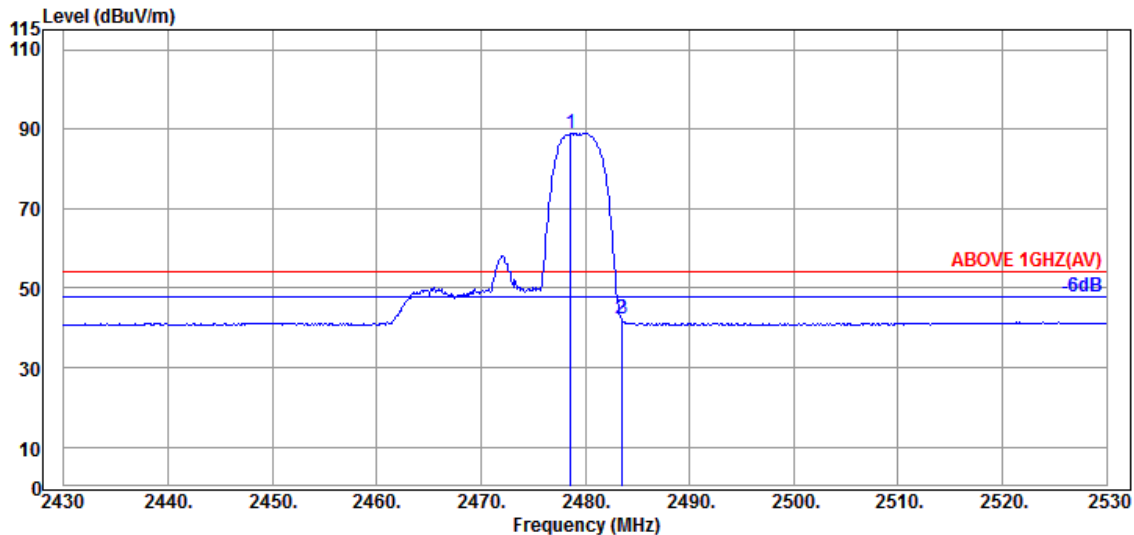


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	32.34	5.86	34.53	85.32	88.99	---	---	Average
2483.500	32.43	5.87	34.53	38.69	42.46	54.00	11.54	Average
2483.600	32.43	5.87	34.53	38.56	42.33	54.00	11.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

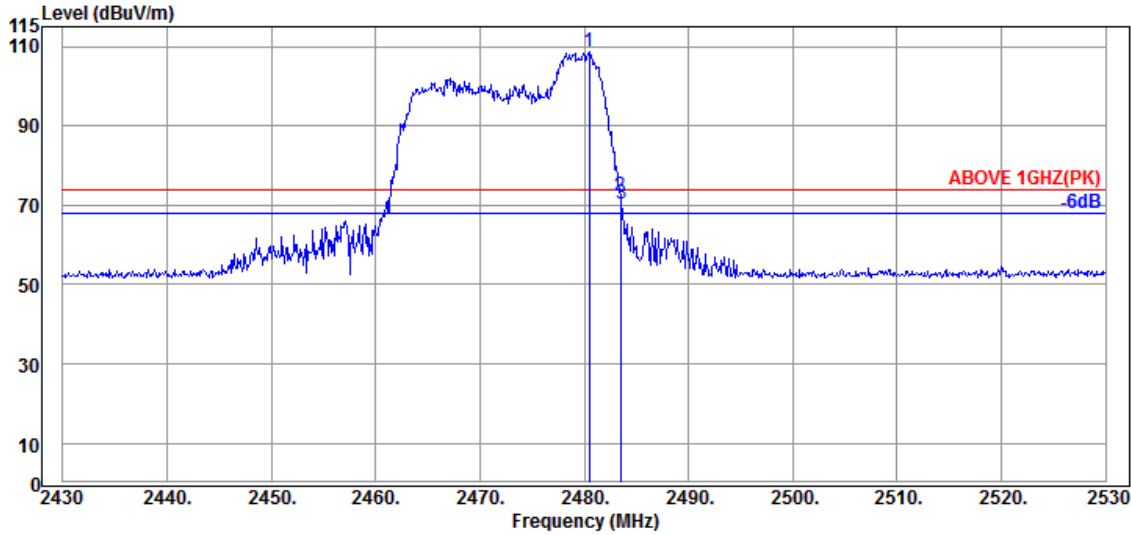

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	32.34	5.86	34.53	104.99	108.66	---	---	Peak
2483.500	32.43	5.87	34.53	68.47	72.24	74.00	1.76	Peak
2483.600	32.43	5.87	34.53	66.56	70.33	74.00	3.67	Peak

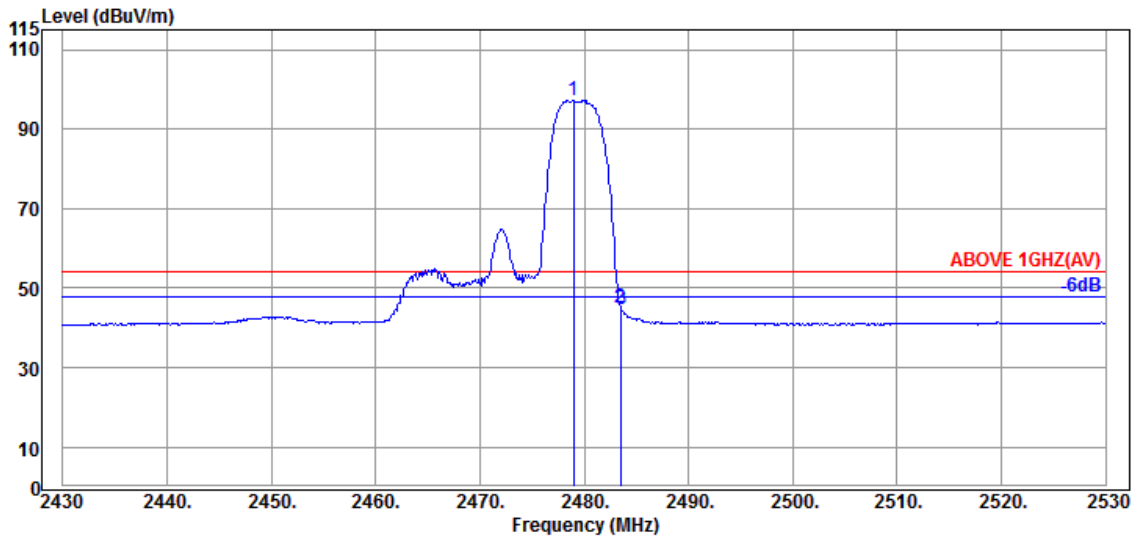


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	32.34	5.86	34.53	93.53	97.20	---	---	Average
2483.500	32.43	5.87	34.53	41.37	45.14	54.00	8.86	Average
2483.600	32.43	5.87	34.53	40.87	44.64	54.00	9.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

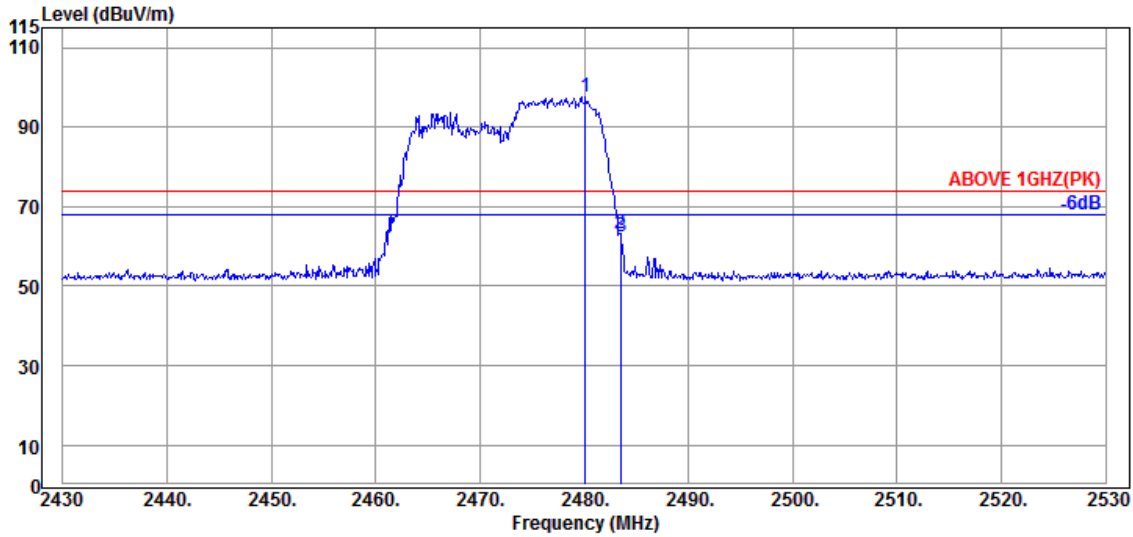

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	32.34	5.86	34.53	94.09	97.76	---	---	Peak
2483.500	32.43	5.87	34.53	59.36	63.13	74.00	10.87	Peak
2483.600	32.43	5.87	34.53	58.52	62.29	74.00	11.71	Peak

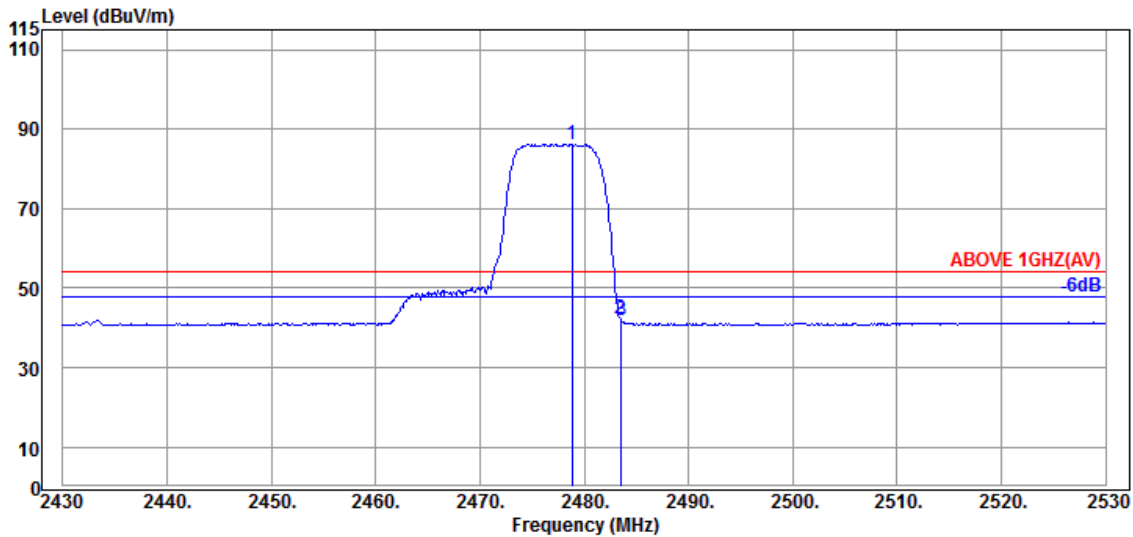


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	32.34	5.86	34.53	82.54	86.21	---	---	Average
2483.500	32.43	5.87	34.53	38.36	42.13	54.00	11.87	Average
2483.600	32.43	5.87	34.53	38.15	41.92	54.00	12.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

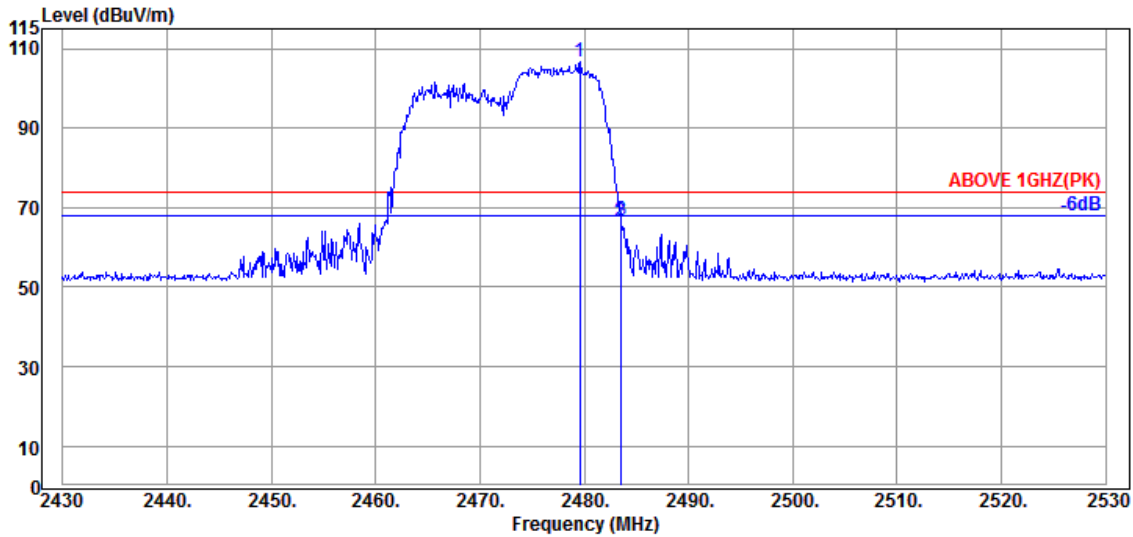

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	32.34	5.86	34.53	102.97	106.64	---	---	Peak
2483.500	32.43	5.87	34.53	62.56	66.33	74.00	7.67	Peak
2483.600	32.43	5.87	34.53	63.03	66.80	74.00	7.20	Peak

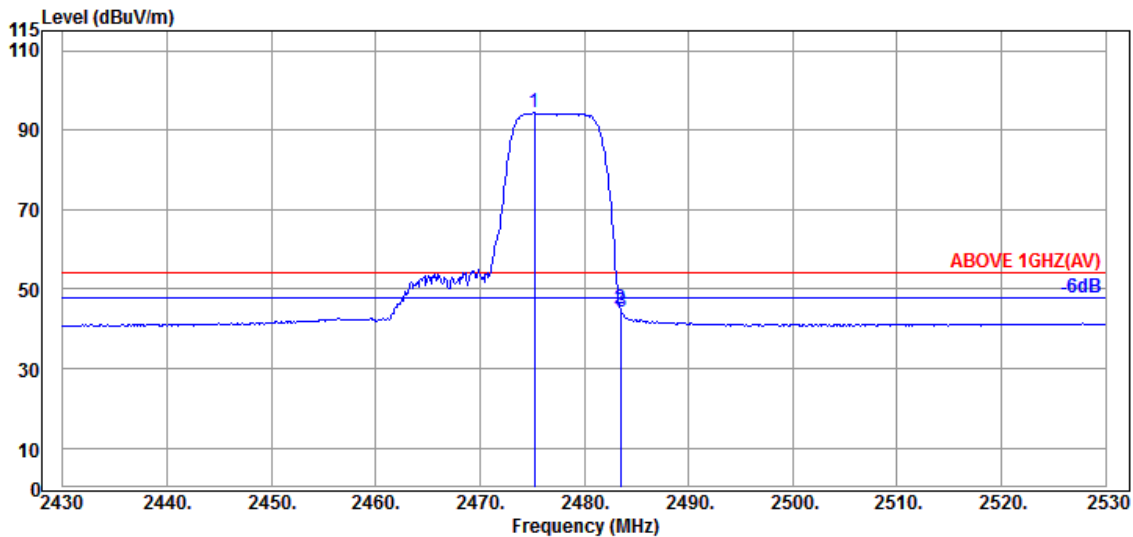


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.200	32.34	5.86	34.53	90.68	94.35	---	---	Average
2483.500	32.43	5.87	34.53	41.21	44.98	54.00	9.02	Average
2483.600	32.43	5.87	34.53	40.31	44.08	54.00	9.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

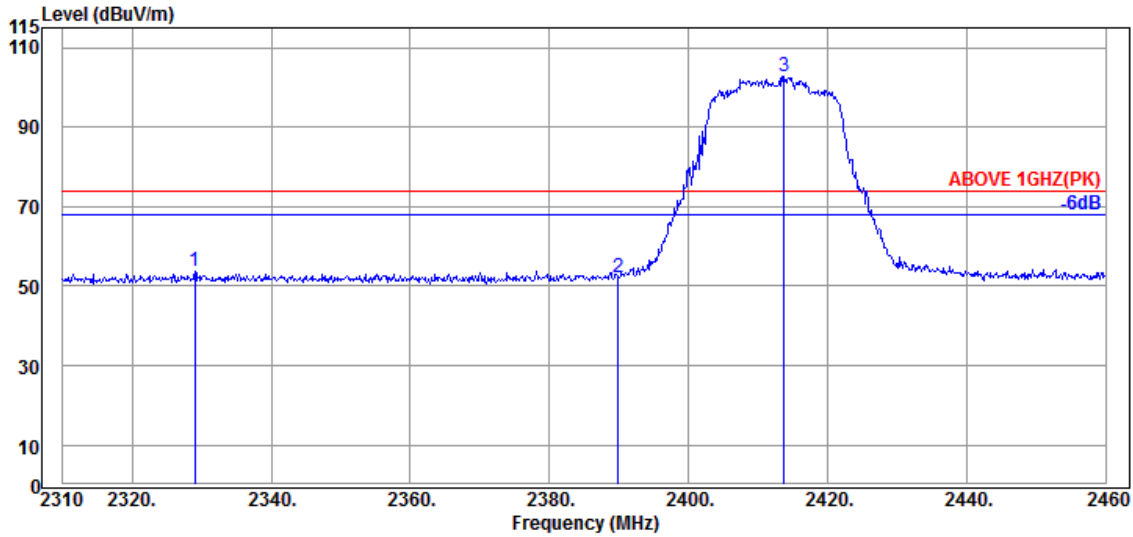

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2329.050	32.08	5.63	34.49	50.52	53.74	74.00	20.26	Peak
2389.950	32.00	5.72	34.51	49.13	52.34	74.00	21.66	Peak
@ 2413.800	32.00	5.76	34.51	99.53	102.78	---	---	Peak

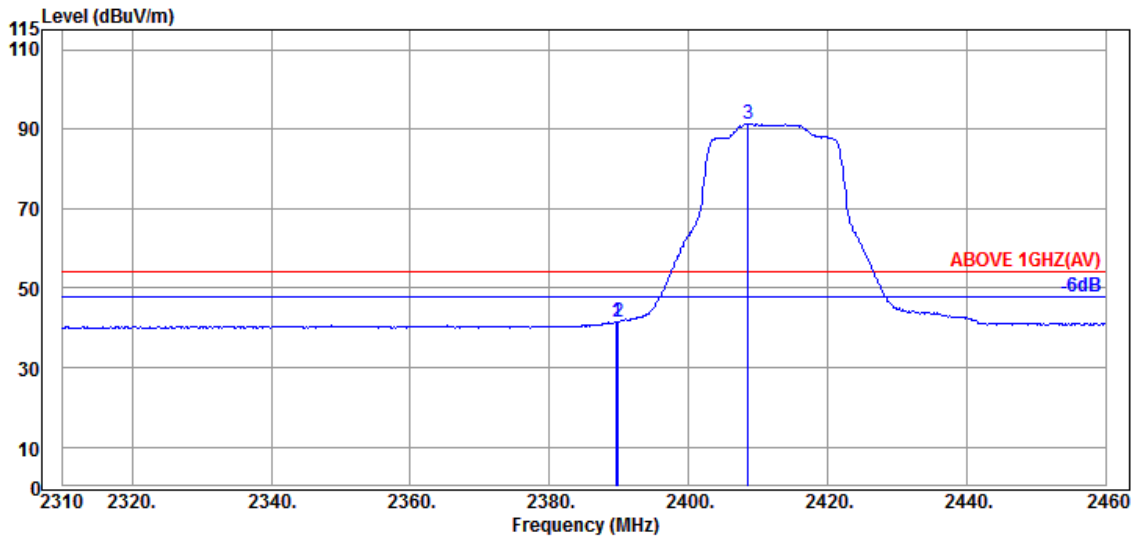


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	32.00	5.72	34.51	38.30	41.51	54.00	12.49	Average
2389.950	32.00	5.72	34.51	38.33	41.54	54.00	12.46	Average
@ 2408.550	32.00	5.75	34.51	88.20	91.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

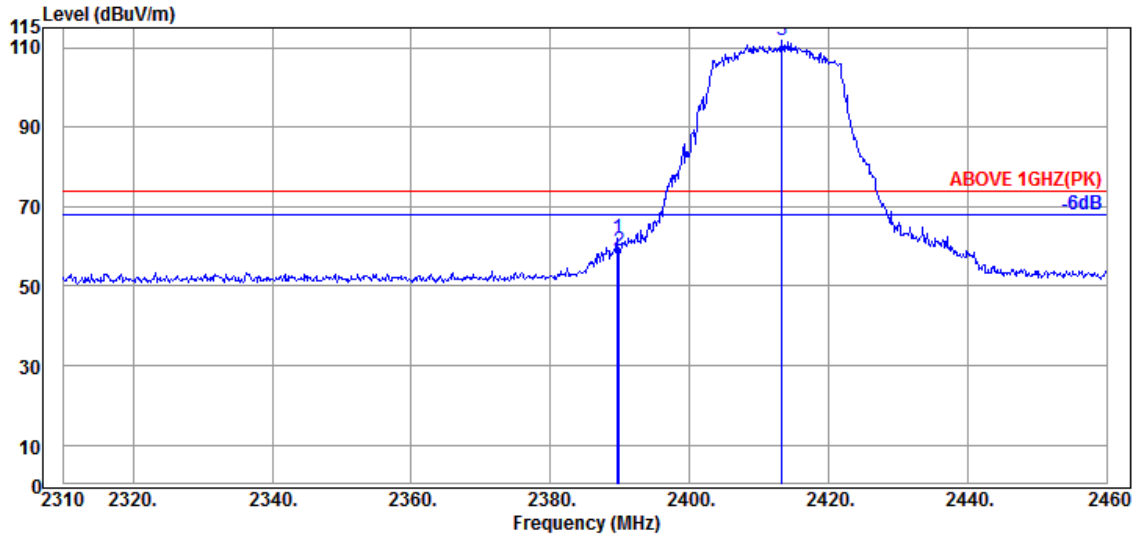

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	32.00	5.72	34.51	58.70	61.91	74.00	12.09	Peak
2389.950	32.00	5.72	34.51	55.56	58.77	74.00	15.23	Peak
@ 2413.350	32.00	5.76	34.51	108.67	111.92	---	---	Peak

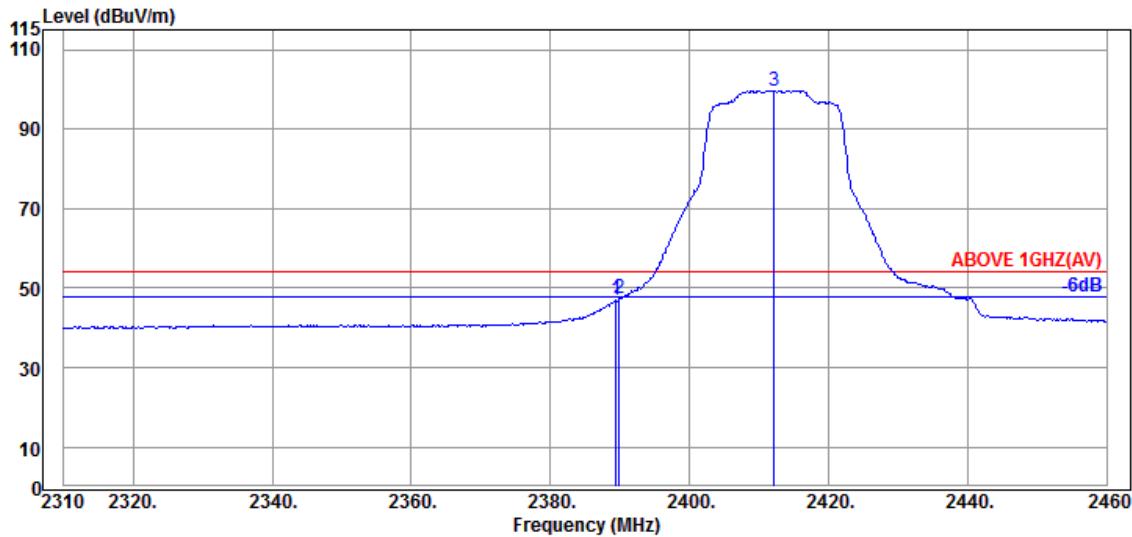


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	32.00	5.72	34.51	43.65	46.86	54.00	7.14	Average
2389.950	32.00	5.72	34.51	44.03	47.24	54.00	6.76	Average
@ 2412.150	32.00	5.76	34.51	96.51	99.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

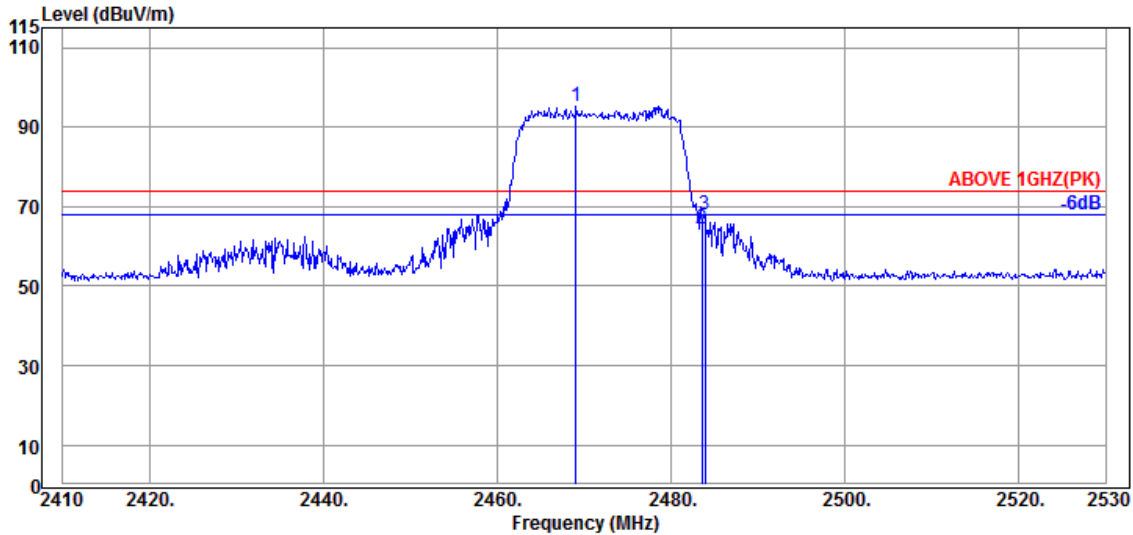

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.040	32.26	5.85	34.52	91.64	95.23	---	---	Peak
2483.560	32.43	5.87	34.53	60.73	64.50	74.00	9.50	Peak
2483.920	32.43	5.87	34.53	64.07	67.84	74.00	6.16	Peak

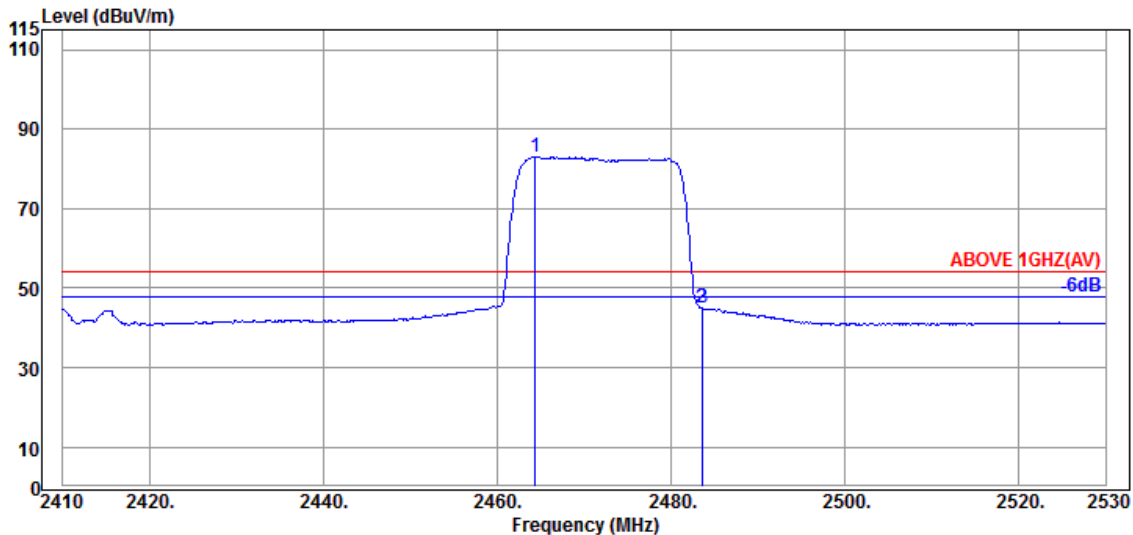


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.360	32.17	5.84	34.52	79.55	83.04	---	---	Average
2483.560	32.43	5.87	34.53	41.15	44.92	54.00	9.08	Average
2483.680	32.43	5.87	34.53	41.15	44.92	54.00	9.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

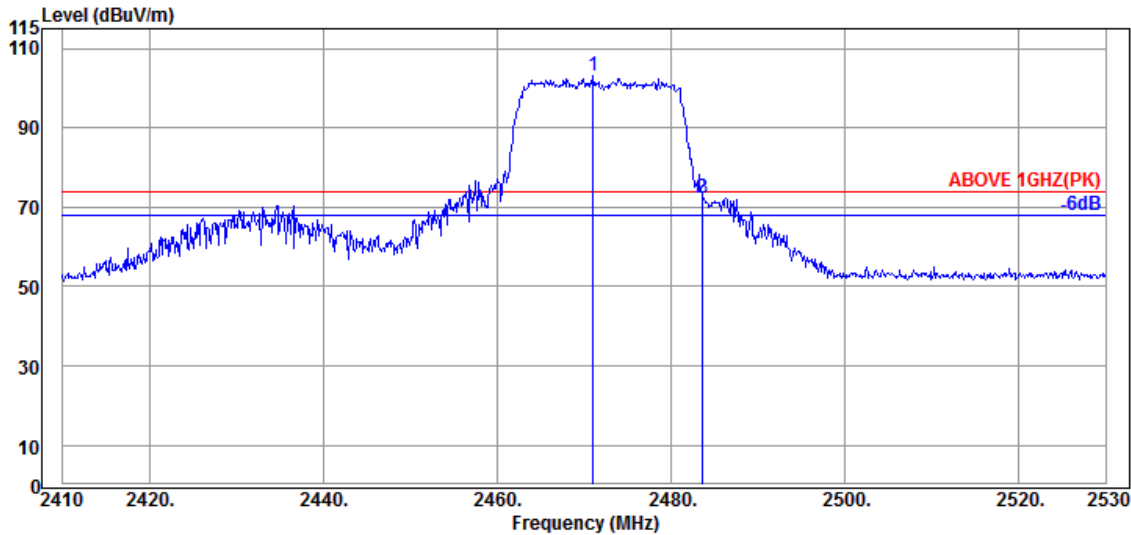

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.080	32.26	5.85	34.52	99.67	103.26	---	---	Peak
2483.560	32.43	5.87	34.53	68.69	72.46	74.00	1.54	Peak
2483.680	32.43	5.87	34.53	68.48	72.25	74.00	1.75	Peak

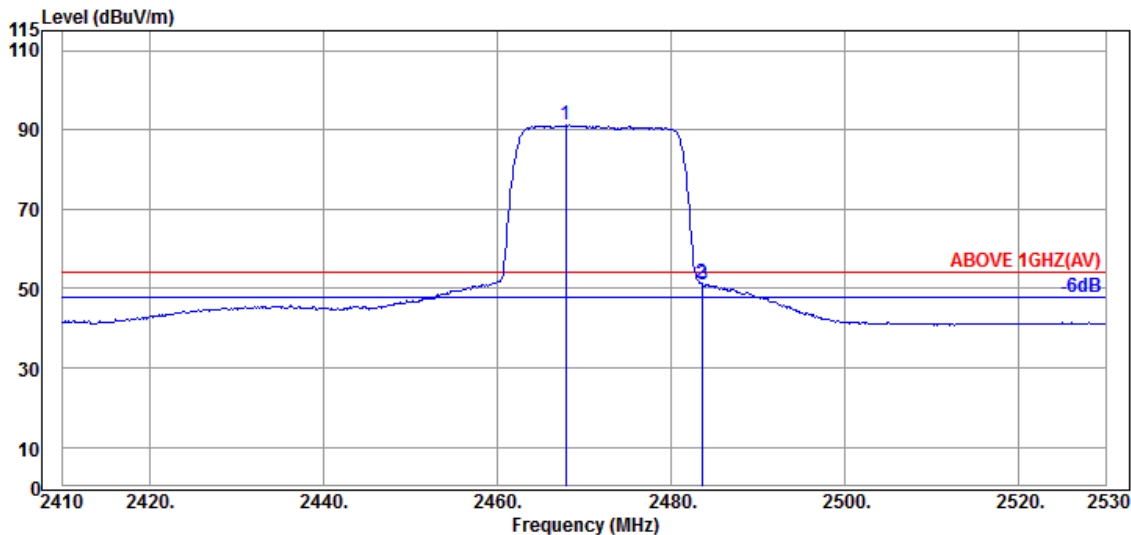


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.840	32.26	5.85	34.52	87.75	91.34	---	---	Average
2483.560	32.43	5.87	34.53	47.47	51.24	54.00	2.76	Average
2483.680	32.43	5.87	34.53	47.36	51.13	54.00	2.87	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

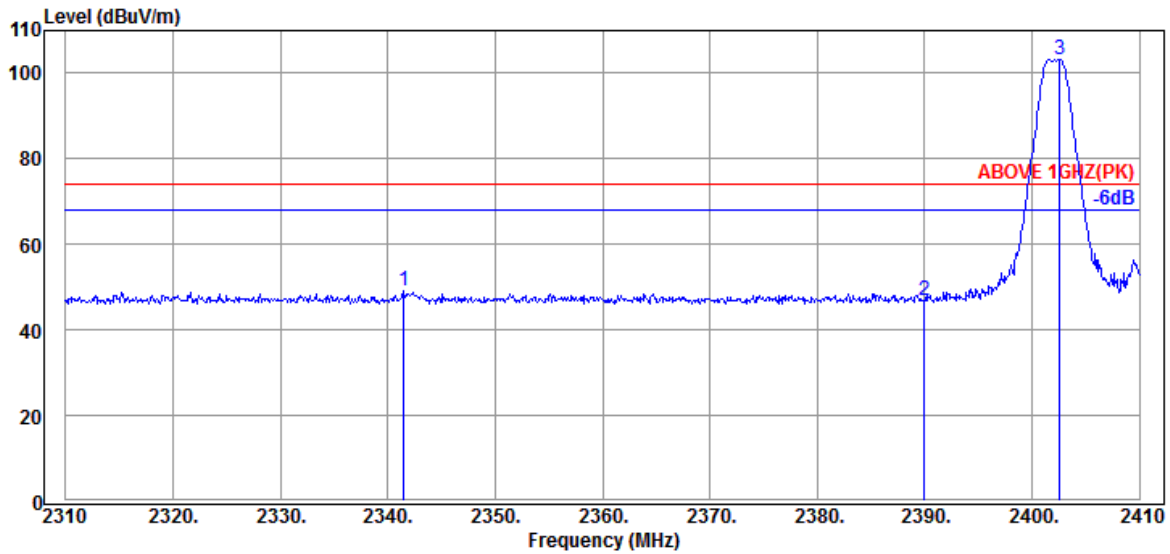

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.500	32.05	5.64	34.50	46.03	49.22	74.00	24.78	Peak
2390.000	32.00	5.72	34.51	43.50	46.71	74.00	27.29	Peak
@ 2402.600	32.00	5.74	34.51	100.00	103.23	---	---	Peak

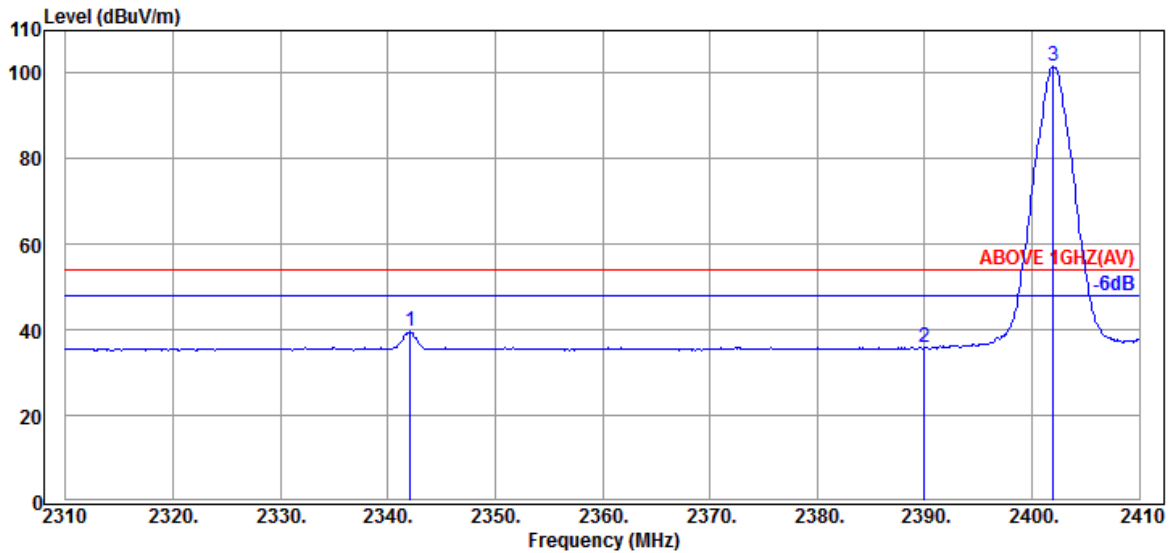


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.100	32.05	5.64	34.50	36.42	39.61	54.00	14.39	Average
2390.000	32.00	5.72	34.51	32.54	35.75	54.00	18.25	Average
@ 2402.000	32.00	5.74	34.51	98.46	101.69	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

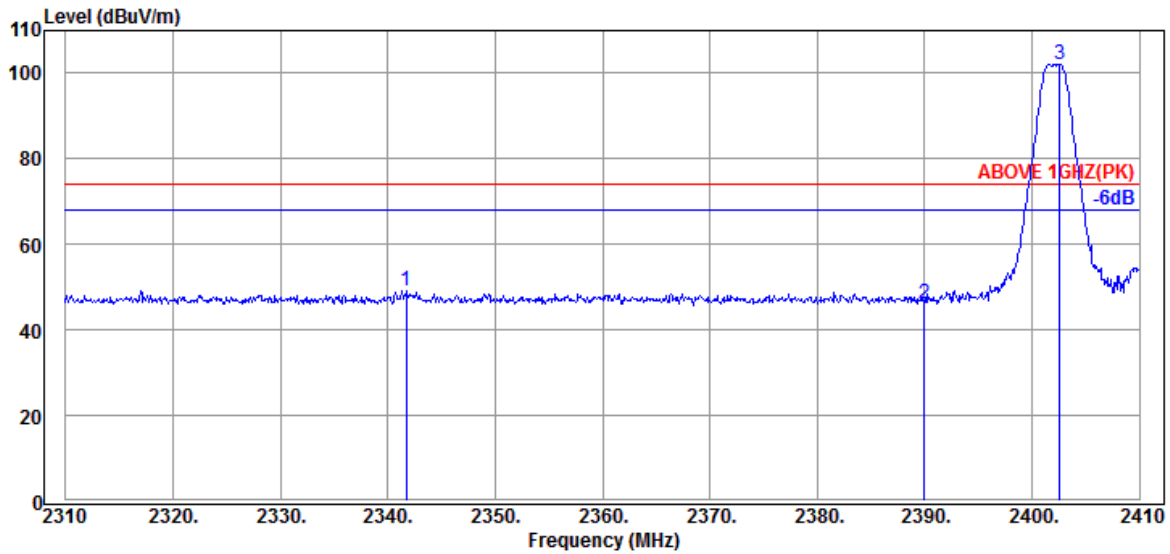

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.700	32.05	5.64	34.50	45.83	49.02	74.00	24.98	Peak
2390.000	32.00	5.72	34.51	42.92	46.13	74.00	27.87	Peak
@ 2402.600	32.00	5.74	34.51	98.88	102.11	---	---	Peak

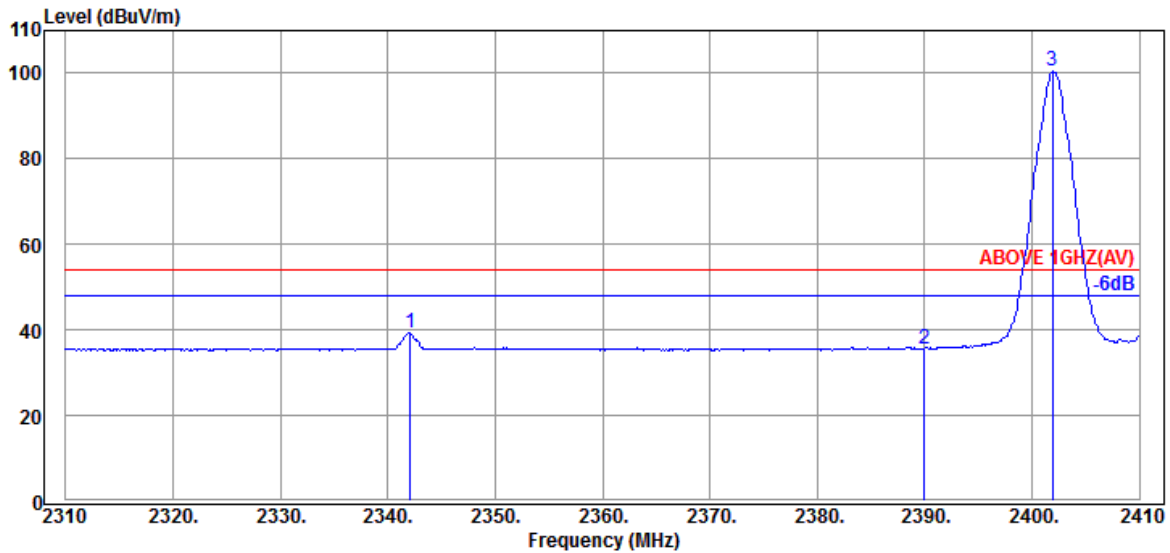


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.100	32.05	5.64	34.50	36.11	39.30	54.00	14.70	Average
2390.000	32.00	5.72	34.51	32.44	35.65	54.00	18.35	Average
@ 2401.900	32.00	5.74	34.51	97.19	100.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

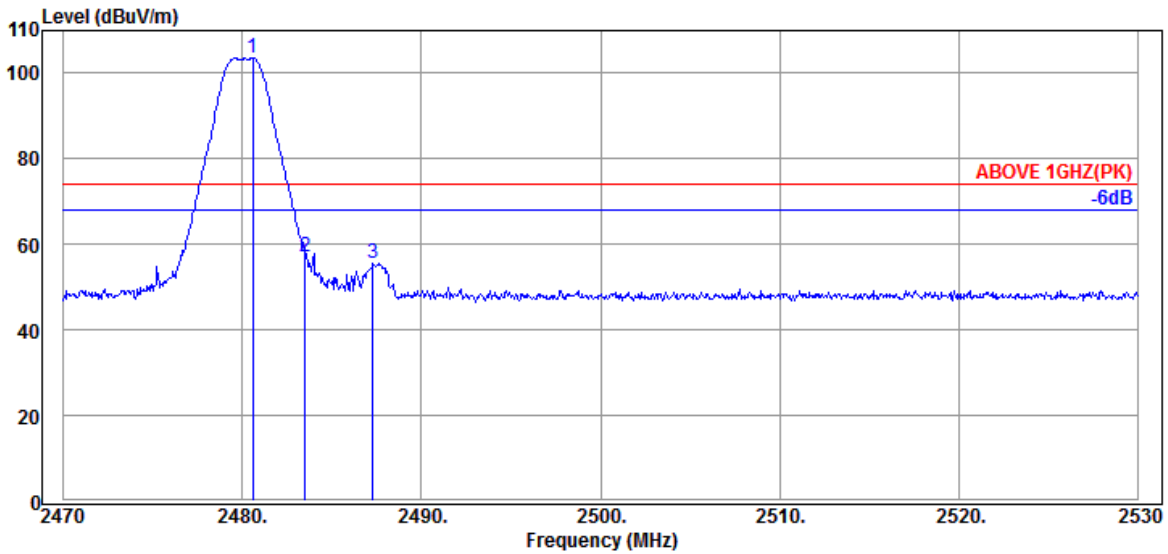

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.560	32.34	5.86	34.53	99.88	103.55	---	---	Peak
2483.500	32.43	5.87	34.53	53.38	57.15	74.00	16.85	Peak
2487.280	32.43	5.87	34.53	51.82	55.59	74.00	18.41	Peak

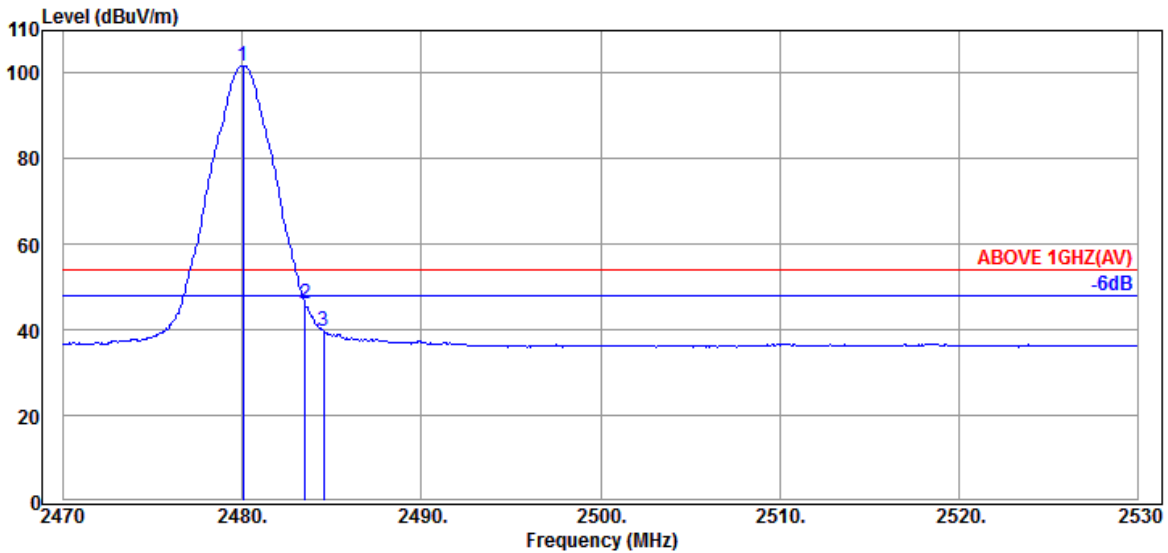


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.020	32.34	5.86	34.53	98.18	101.85	---	---	Average
2483.500	32.43	5.87	34.53	42.26	46.03	54.00	7.97	Average
2484.520	32.43	5.87	34.53	35.93	39.70	54.00	14.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

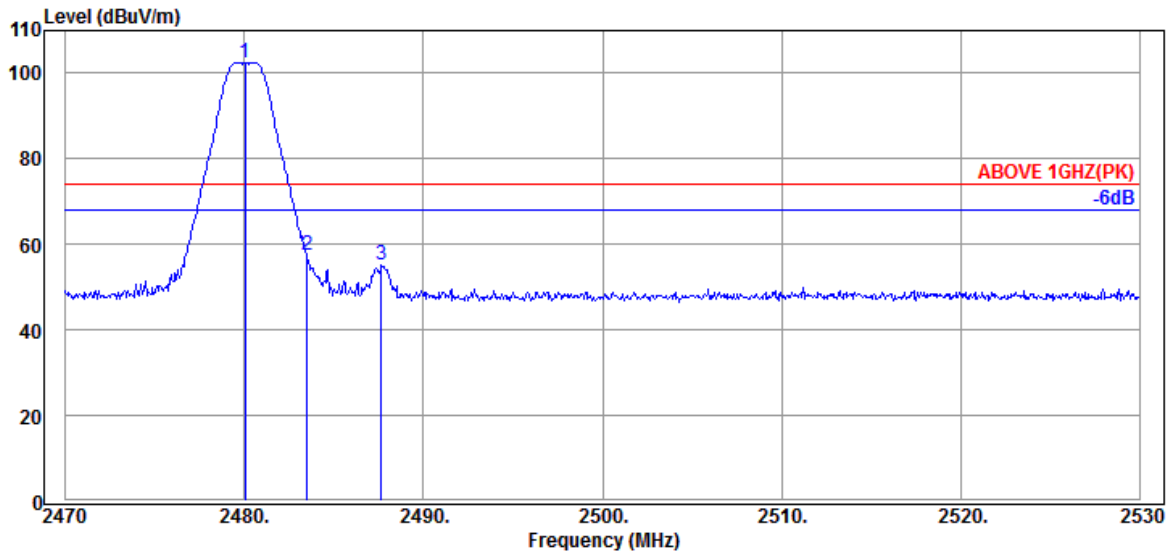

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.020	32.34	5.86	34.53	98.92	102.59	---	---	Peak
2483.500	32.43	5.87	34.53	53.73	57.50	74.00	16.50	Peak
2487.640	32.43	5.87	34.53	51.36	55.13	74.00	18.87	Peak

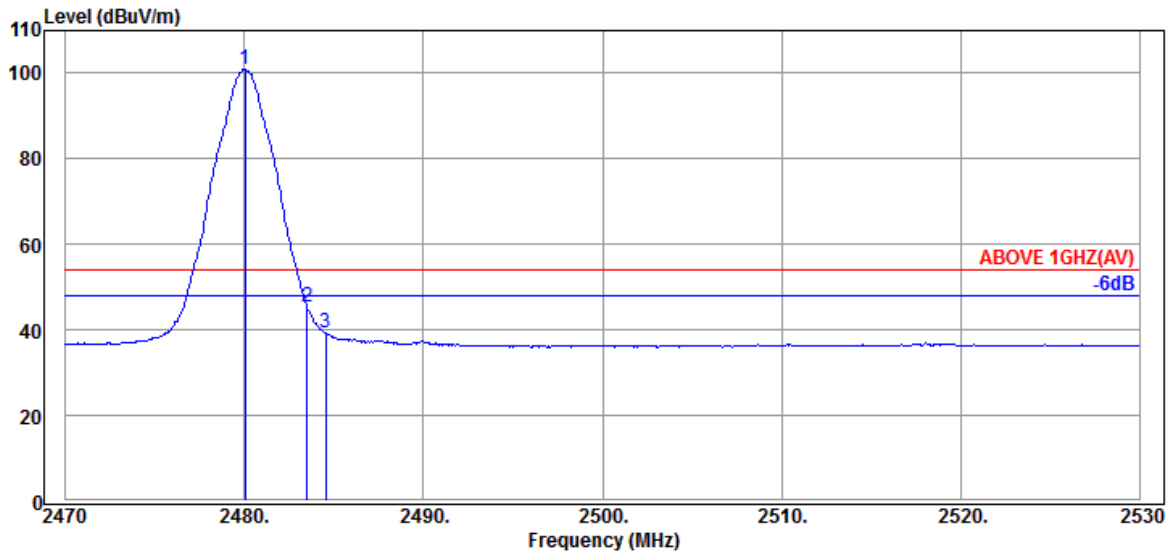


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.020	32.34	5.86	34.53	97.31	100.98	---	---	Average
2483.500	32.43	5.87	34.53	41.62	45.39	54.00	8.61	Average
2484.520	32.43	5.87	34.53	35.50	39.27	54.00	14.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


**Spot Check with SKU #2 (with LUXSHARE-ICT ANT)**

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

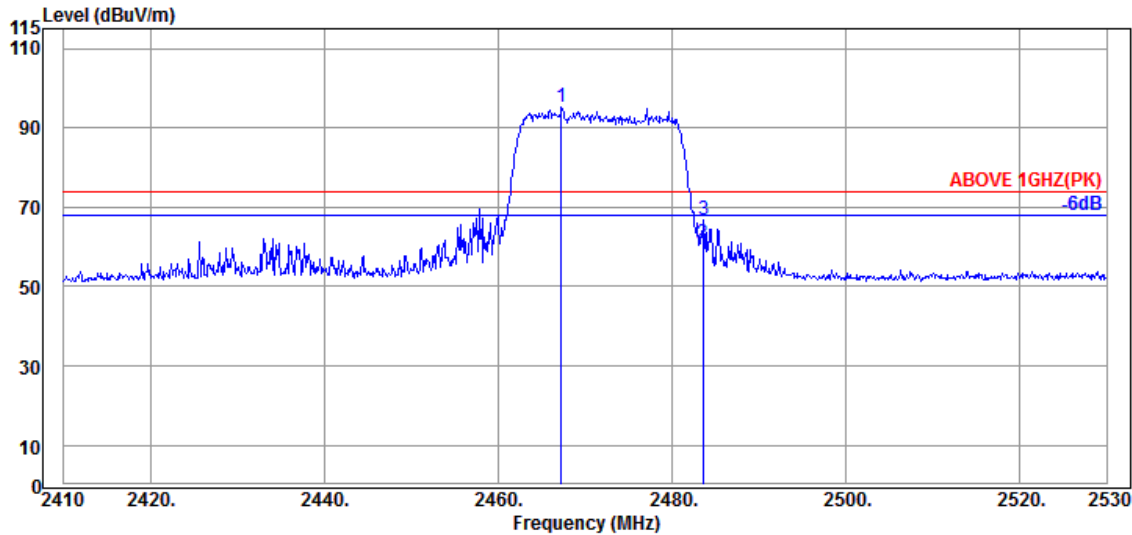

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.240	32.17	5.84	34.52	91.57	95.06	---	---	Peak
2483.560	32.43	5.87	34.53	57.05	60.82	74.00	13.18	Peak
2483.680	32.43	5.87	34.53	62.95	66.72	74.00	7.28	Peak

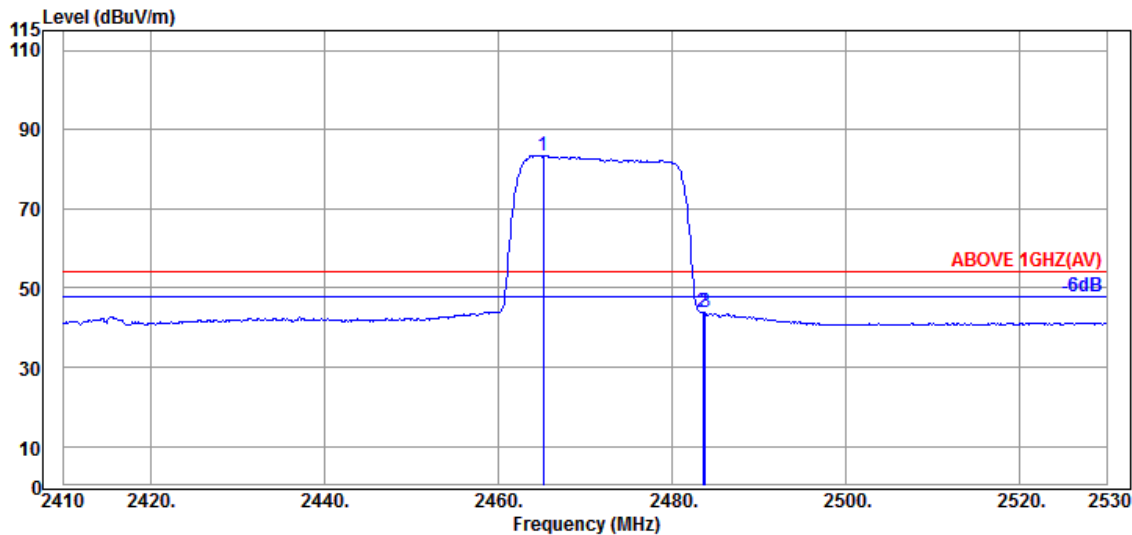


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	32.17	5.84	34.52	80.02	83.51	---	---	Average
2483.560	32.43	5.87	34.53	40.05	43.82	54.00	10.18	Average
2483.800	32.43	5.87	34.53	39.91	43.68	54.00	10.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

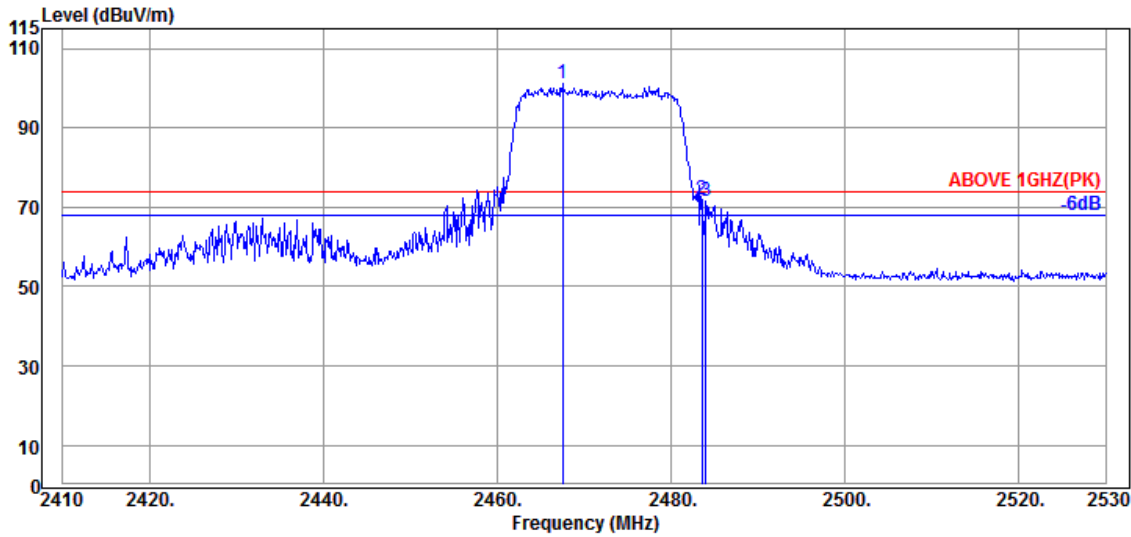

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.480	32.17	5.84	34.52	97.68	101.17	---	---	Peak
2483.560	32.43	5.87	34.53	68.27	72.04	74.00	1.96	Peak
2484.040	32.43	5.87	34.53	67.66	71.43	74.00	2.57	Peak

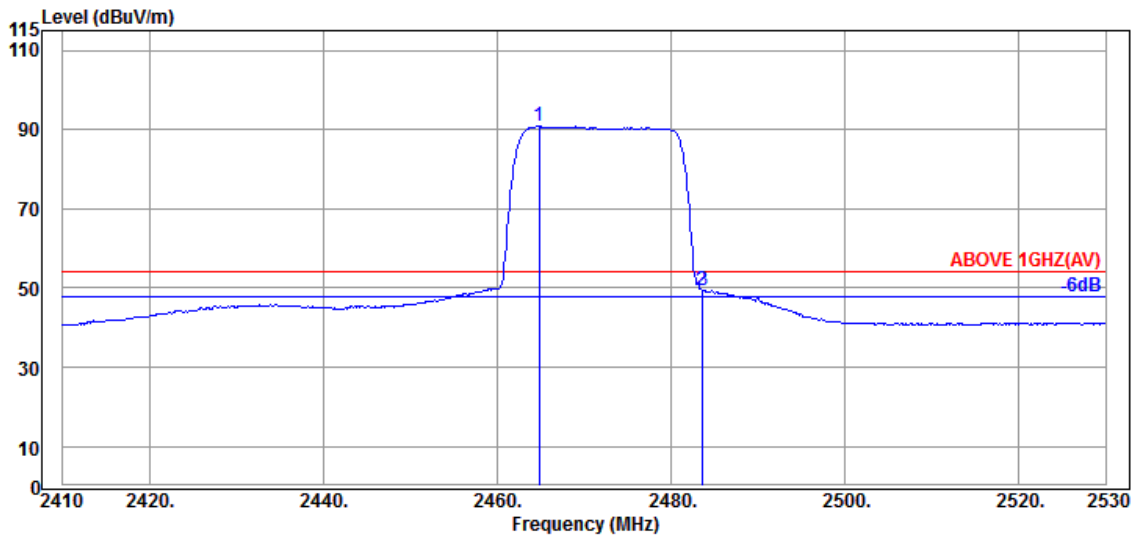


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.840	32.17	5.84	34.52	87.52	91.01	---	---	Average
2483.560	32.43	5.87	34.53	45.81	49.58	54.00	4.42	Average
2483.680	32.43	5.87	34.53	45.69	49.46	54.00	4.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


**Spot Check with SKU #2 (with INAPQ ANT)**

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

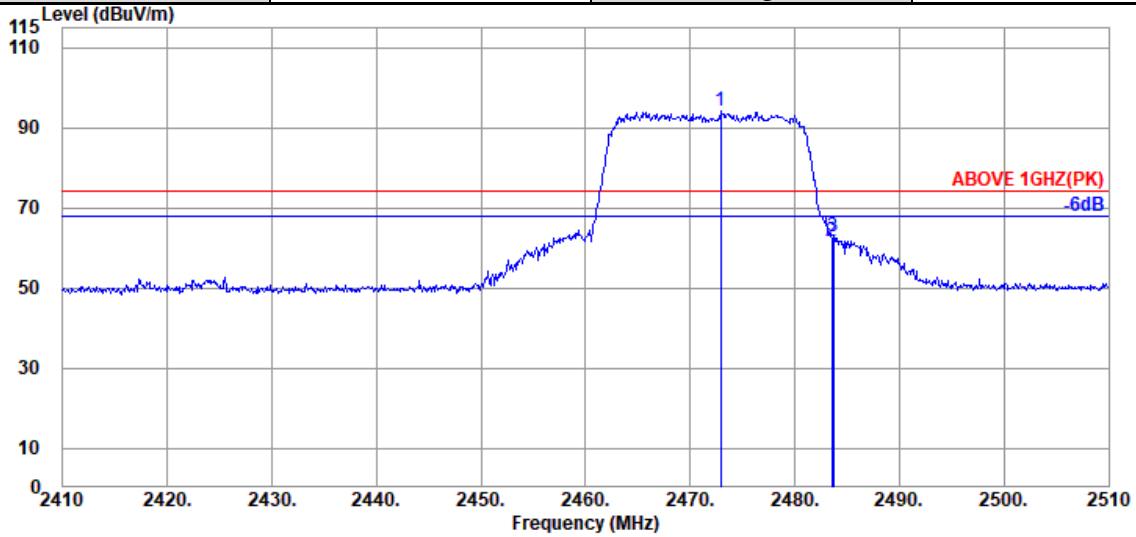

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.900	28.44	5.85	39.92	99.77	94.14	---	---	Peak
2483.500	28.47	5.87	39.92	67.35	61.77	74.00	12.23	Peak
2483.700	28.47	5.87	39.92	68.41	62.83	74.00	11.17	Peak

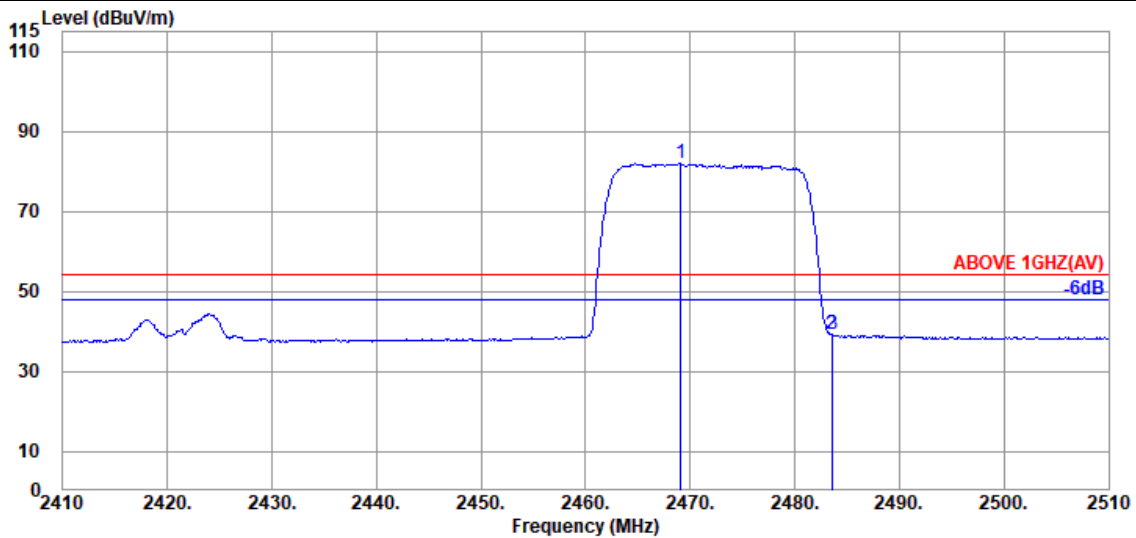


**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.100	28.44	5.85	39.92	87.57	81.94	---	---	Average
2483.500	28.47	5.87	39.92	44.75	39.17	54.00	14.83	Average
2483.600	28.47	5.87	39.92	44.71	39.13	54.00	14.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

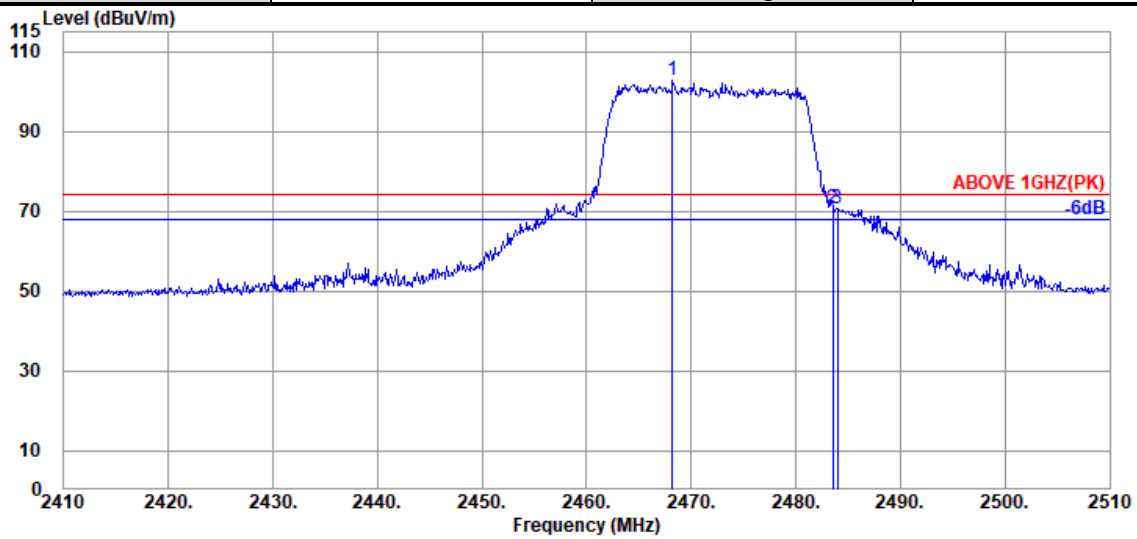

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	5.85	39.92	108.27	102.64	---	---	Peak
2483.500	28.47	5.87	39.92	76.04	70.46	74.00	3.54	Peak
2484.000	28.47	5.87	39.92	76.20	70.62	74.00	3.38	Peak

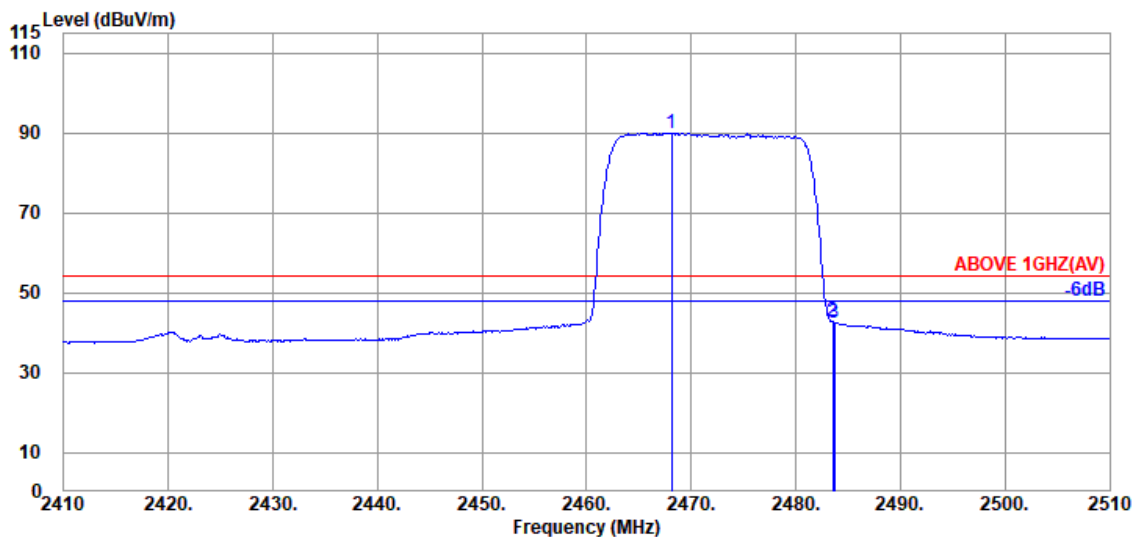

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.44	5.85	39.92	95.62	89.99	---	---	Average
2483.500	28.47	5.87	39.92	48.34	42.76	54.00	11.24	Average
2483.700	28.47	5.87	39.92	48.09	42.51	54.00	11.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

### A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

- **Test SKU #1 (with LUXSHARE-ICT Antenna)**

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.97	45.51	54.00	8.49	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.94	45.48	54.00	8.52	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.87	45.41	54.00	8.59	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.74	45.28	54.00	8.72	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.33	44.87	54.00	9.13	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.27	44.81	54.00	9.19	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.91	45.45	54.00	8.55	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	41.50	44.04	54.00	9.96	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.30	44.84	54.00	9.16	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	43.51	46.05	54.00	7.95	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	43.34	45.88	54.00	8.12	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.25	8.64	39.35	42.08	44.62	54.00	9.38	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz		
------	----------	-----------	------------	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.00	8.53	39.39	41.07	43.21	54.00	10.79	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.00	8.53	39.39	42.15	44.29	54.00	9.71	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz		
------	----------	-----------	------------	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	42.67	45.14	54.00	8.86	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.20	8.62	39.35	42.17	44.64	54.00	9.36	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz		
------	----------	-----------	------------	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.74	39.31	42.88	45.71	54.00	8.29	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.74	39.31	43.15	45.98	54.00	8.02	Peak

● Test SKU #1 (with INPAQ Antenna)

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.91	43.18	54.00	10.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.42	42.69	54.00	11.31	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.51	42.78	54.00	11.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.33	42.60	54.00	11.40	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.87	43.14	54.00	10.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.94	43.21	54.00	10.79	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.47	42.74	54.00	11.26	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.50	42.77	54.00	11.23	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	35.80	44.07	54.00	9.93	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	35.25	43.52	54.00	10.48	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.99	43.26	54.00	10.74	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	34.26	42.53	54.00	11.47	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz						
------	----------	-----------	------------	--	--	--	--	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	34.10	8.53	34.43	35.77	43.97	54.00	10.03	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	34.10	8.53	34.43	36.48	44.68	54.00	9.32	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz						
------	----------	-----------	------------	--	--	--	--	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	34.05	8.64	34.42	35.88	44.15	54.00	9.85	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	34.05	8.64	34.42	33.88	42.15	54.00	11.85	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz						
------	----------	-----------	------------	--	--	--	--	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.22	8.74	34.41	35.29	43.84	54.00	10.16	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.22	8.74	34.41	35.80	44.35	54.00	9.65	Peak



**Spot Check with SKU #2 (with LUXSHARE-ICT ANT)**

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.41	39.68	54.00	14.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.07	39.34	54.00	14.66	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.81	40.08	54.00	13.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.26	40.53	54.00	13.47	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.36	39.63	54.00	14.37	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.26	39.53	54.00	14.47	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.06	39.33	54.00	14.67	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	30.90	39.17	54.00	14.83	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.61	39.88	54.00	14.12	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	30.72	38.99	54.00	15.01	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.16	39.43	54.00	14.57	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	31.06	39.33	54.00	14.67	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	34.10	8.53	34.43	33.23	41.43	54.00	12.57	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	34.10	8.53	34.43	32.11	40.31	54.00	13.69	Peak

**Spot Check with SKU #2 (with INAPQ ANT)**

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.47	40.74	54.00	13.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.95	41.22	54.00	12.78	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.83	41.10	54.00	12.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.96	41.23	54.00	12.77	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	33.07	41.34	54.00	12.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.54	40.81	54.00	13.19	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	33.46	41.73	54.00	12.27	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.51	40.78	54.00	13.22	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	33.19	41.46	54.00	12.54	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.26	40.53	54.00	13.47	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.87	41.14	54.00	12.86	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	34.05	8.64	34.42	32.48	40.75	54.00	13.25	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4804.000	34.10	8.53	34.43	32.82	41.02	54.00	12.98	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4804.000	34.10	8.53	34.43	33.45	41.65	54.00	12.35	Peak

**A.2.3 Emissions in Non-restricted Frequency Bands:**

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.