


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	329
A.2.3 Emissions in Non-restricted Frequency Bands.....	368
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH	369
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	369
A.3.2 Measurement Plots	379
A.4 POWER SPECTRAL DENSITY	420
A.4.1 Power Spectral Density Result	420
A.4.2 Measurement Plots	429
A.5 FREQUENCY STABILITY	471
A.5.1 Frequency stability Result	471

A.1 CONDUCTED EMISSION

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1		

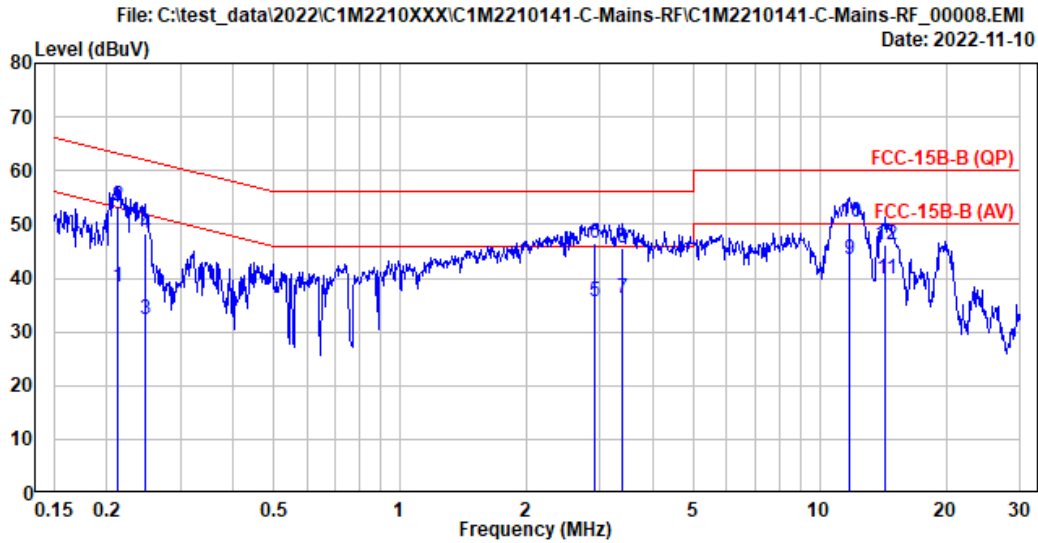

Site No.	: No.8 Shielded Room	Data No.	: 8
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 16Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.213	10.32	0.03	9.85	18.21	38.41	53.10	14.69	Average
2	0.213	10.32	0.03	9.85	33.33	53.53	63.10	9.57	QP
3	0.248	10.32	0.03	9.85	12.09	32.29	51.82	19.53	Average
4	0.248	10.32	0.03	9.85	28.03	48.23	61.82	13.59	QP
5	2.911	10.38	0.07	9.86	15.46	35.77	46.00	10.23	Average
6	2.911	10.38	0.07	9.86	26.14	46.45	56.00	9.55	QP
7	3.398	10.39	0.08	9.86	15.84	36.17	46.00	9.83	Average
8	3.398	10.39	0.08	9.86	25.35	45.68	56.00	10.32	QP
9	11.753	10.73	0.15	9.90	22.77	43.55	50.00	6.45	Average
10	11.753	10.73	0.15	9.90	29.61	50.39	60.00	9.61	QP
11	14.347	10.85	0.17	9.91	18.90	39.83	50.00	10.17	Average
12	14.347	10.85	0.17	9.91	25.14	46.07	60.00	13.93	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1		

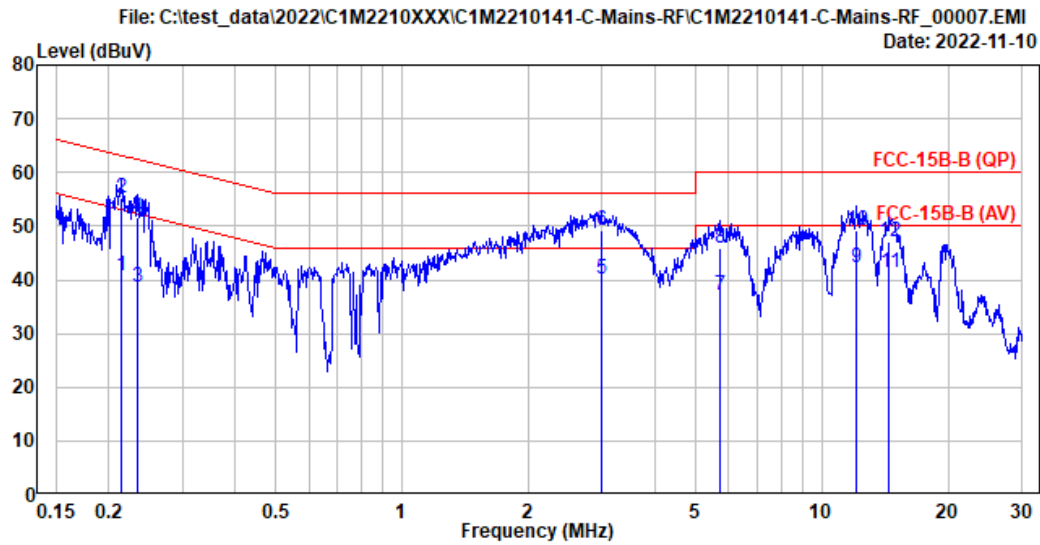


Site No.	: No.8 Shielded Room	Data No.	: 7
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 16290R	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.214	10.22	0.03	9.85	20.54	40.64	53.06	12.42	Average
2	0.214	10.22	0.03	9.85	35.19	55.29	63.06	7.77	QP
3	0.234	10.22	0.03	9.85	18.69	38.79	52.32	13.53	Average
4	0.234	10.22	0.03	9.85	31.64	51.74	62.32	10.58	QP
5	2.985	10.27	0.07	9.86	19.89	40.09	46.00	5.91	Average
6	2.985	10.27	0.07	9.86	28.88	49.08	56.00	6.92	QP
7	5.705	10.33	0.10	9.87	16.97	37.27	50.00	12.73	Average
8	5.705	10.33	0.10	9.87	25.45	45.75	60.00	14.25	QP
9	12.110	10.48	0.15	9.90	21.75	42.28	50.00	7.72	Average
10	12.110	10.48	0.15	9.90	28.59	49.12	60.00	10.88	QP
11	14.490	10.54	0.17	9.91	20.76	41.38	50.00	8.62	Average
12	14.490	10.54	0.17	9.91	26.54	47.16	60.00	12.84	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2		

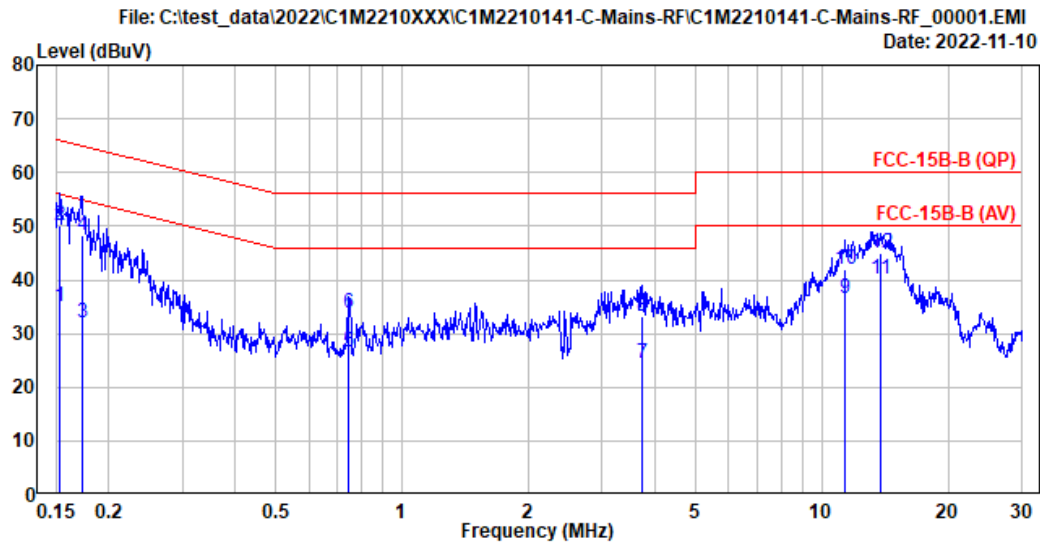


Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Neutral
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 16Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.34	0.03	9.85	14.68	34.90	55.83	20.93	Average
2	0.153	10.34	0.03	9.85	29.90	50.12	65.83	15.71	QP
3	0.172	10.33	0.03	9.85	11.87	32.08	54.84	22.76	Average
4	0.172	10.33	0.03	9.85	27.96	48.17	64.84	16.67	QP
5	0.747	10.33	0.04	9.85	6.20	26.42	46.00	19.58	Average
6	0.747	10.33	0.04	9.85	13.71	33.93	56.00	22.07	QP
7	3.735	10.40	0.08	9.86	4.04	24.38	46.00	21.62	Average
8	3.735	10.40	0.08	9.86	12.88	33.22	56.00	22.78	QP
9	11.407	10.71	0.15	9.90	15.80	36.56	50.00	13.44	Average
10	11.407	10.71	0.15	9.90	21.32	42.08	60.00	17.92	QP
11	13.786	10.82	0.16	9.91	19.19	40.08	50.00	9.92	Average
12	13.786	10.82	0.16	9.91	24.20	45.09	60.00	14.91	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/11/10	Temp./Hum.	26°C/64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2		

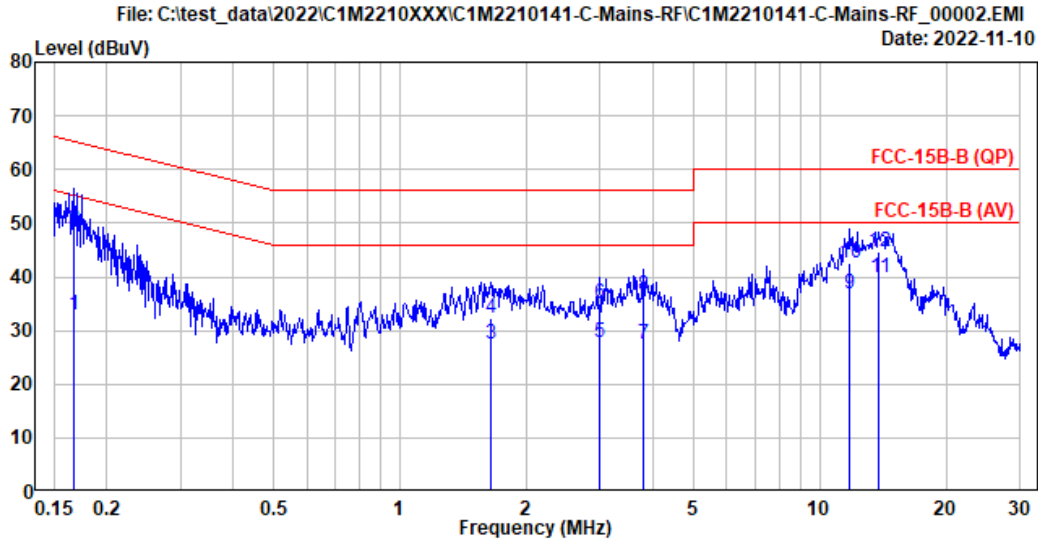

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC-15B-B (QP)	Phase	: Line
Environment	: 26°C/64 %	Engineer	: Roy Hung
EUT Model	: 16Z90R	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.167	10.22	0.03	9.85	12.90	33.00	55.09	22.09	Average
2	0.167	10.22	0.03	9.85	28.74	48.84	65.09	16.25	QP
3	1.641	10.24	0.05	9.86	7.28	27.43	46.00	18.57	Average
4	1.641	10.24	0.05	9.86	12.23	32.38	56.00	23.62	QP
5	3.000	10.27	0.07	9.86	7.61	27.81	46.00	18.19	Average
6	3.000	10.27	0.07	9.86	14.73	34.93	56.00	21.07	QP
7	3.791	10.28	0.08	9.86	7.14	27.36	46.00	18.64	Average
8	3.791	10.28	0.08	9.86	16.18	36.40	56.00	19.60	QP
9	11.812	10.47	0.15	9.90	16.19	36.71	50.00	13.29	Average
10	11.812	10.47	0.15	9.90	22.08	42.60	60.00	17.40	QP
11	13.855	10.52	0.16	9.91	19.23	39.82	50.00	10.18	Average
12	13.855	10.52	0.16	9.91	24.20	44.79	60.00	15.21	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/10/17 ~ 12/12	Temp./Hum.	20 ~ 24°C/52 ~ 63%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

● **Test SKU #1 (with INPAQ Antenna)**

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.70	1.48	26.48	32.32	30.02	40.00	9.98	Peak
104.690	17.14	2.67	26.26	32.57	26.12	43.50	17.38	Peak
163.860	16.17	3.34	25.93	37.50	31.08	43.50	12.42	Peak
209.450	15.99	3.81	25.77	36.32	30.35	43.50	13.15	Peak
378.230	21.18	5.69	26.28	37.81	38.40	46.00	7.60	Peak
485.900	23.24	6.65	27.04	35.63	38.48	46.00	7.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.32	1.53	0.00	14.85	38.70	40.00	1.30	Peak
47.460	15.36	1.78	26.46	47.46	38.14	40.00	1.86	Peak
140.580	17.49	3.10	26.04	35.75	30.30	43.50	13.20	Peak
167.740	16.00	3.39	25.91	39.62	33.10	43.50	10.40	Peak
378.230	21.18	5.69	26.28	36.48	37.07	46.00	8.93	Peak
485.900	23.24	6.65	27.04	35.86	38.71	46.00	7.29	Peak

● **Test SKU #2 (with LUXSHARE-ICT Antenna)**

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.910	22.70	1.48	26.48	31.97	29.67	40.00	10.33	Peak
104.690	17.14	2.67	26.26	32.20	25.75	43.50	17.75	Peak
165.800	16.07	3.37	25.92	36.48	30.00	43.50	13.50	Peak
212.360	16.18	3.85	25.76	36.29	30.56	43.50	12.94	Peak
378.230	21.18	5.69	26.28	36.59	37.18	46.00	8.82	Peak
485.900	23.24	6.65	27.04	36.52	39.37	46.00	6.63	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.880	22.50	1.51	0.00	14.72	38.73	40.00	1.27	Peak
46.490	15.84	1.76	26.46	47.62	38.76	40.00	1.24	Peak
114.390	17.73	2.79	26.19	35.54	29.87	43.50	13.63	Peak
171.620	15.86	3.42	25.90	39.08	32.46	43.50	11.04	Peak
378.230	21.18	5.69	26.28	37.26	37.85	46.00	8.15	Peak
485.900	23.24	6.65	27.04	36.78	39.63	46.00	6.37	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


- **Test SKU #1 (with LUXSHARE-ICT Antenna)**

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

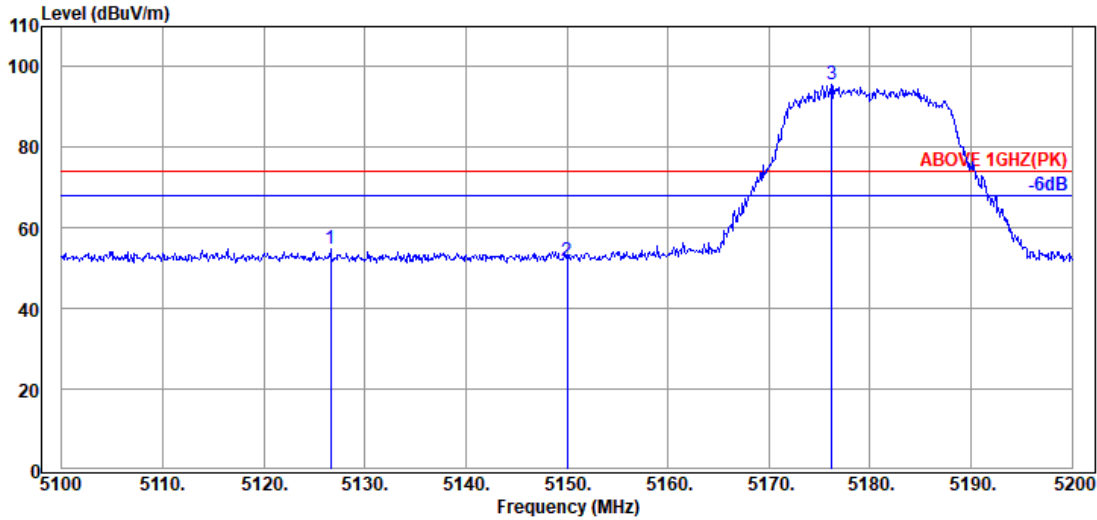

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.600	33.70	8.87	39.29	51.44	54.72	74.00	19.28	Peak
5150.000	33.70	8.88	39.29	48.65	51.94	74.00	22.06	Peak
@ 5176.200	33.70	8.90	39.28	92.45	95.77	---	---	Peak

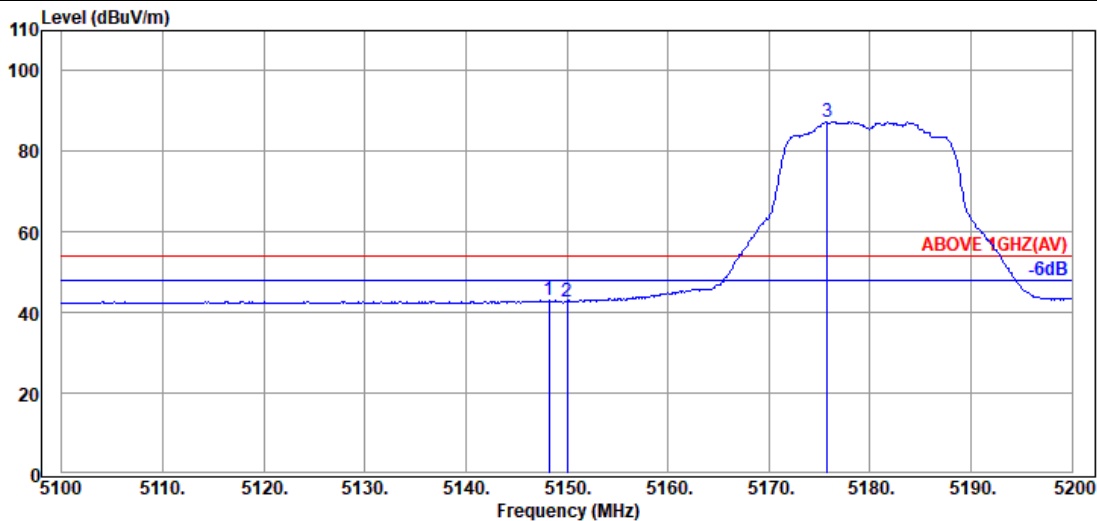


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	33.70	8.88	39.29	39.77	43.06	54.00	10.94	Average
5150.000	33.70	8.88	39.29	39.53	42.82	54.00	11.18	Average
@ 5175.800	33.70	8.90	39.28	84.08	87.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

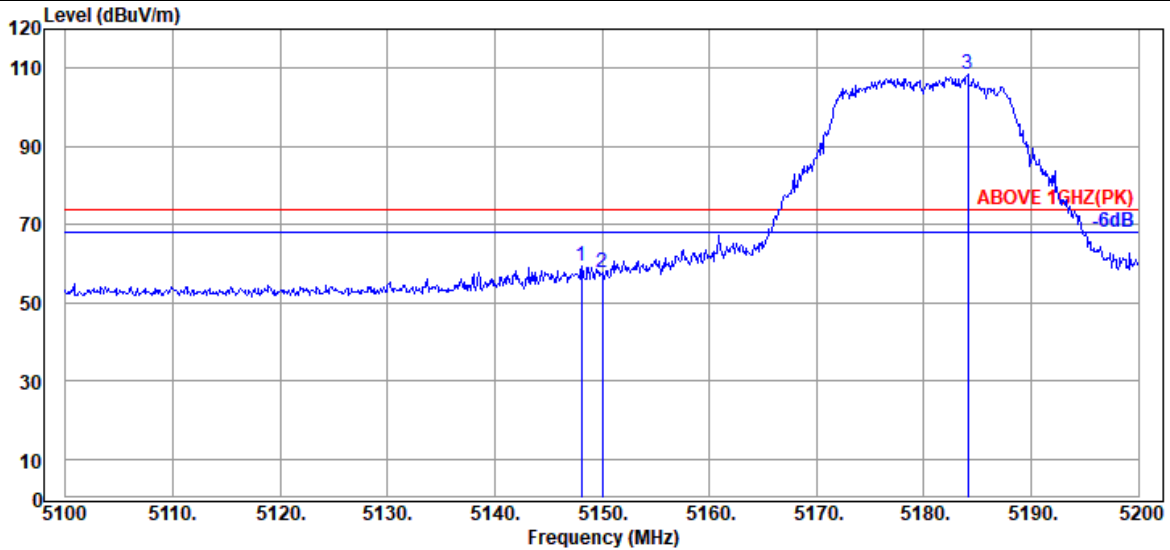

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.70	8.88	39.29	56.25	59.54	74.00	14.46	Peak
5150.000	33.70	8.88	39.29	54.58	57.87	74.00	16.13	Peak
@ 5184.100	33.70	8.90	39.28	105.09	108.41	---	---	Peak

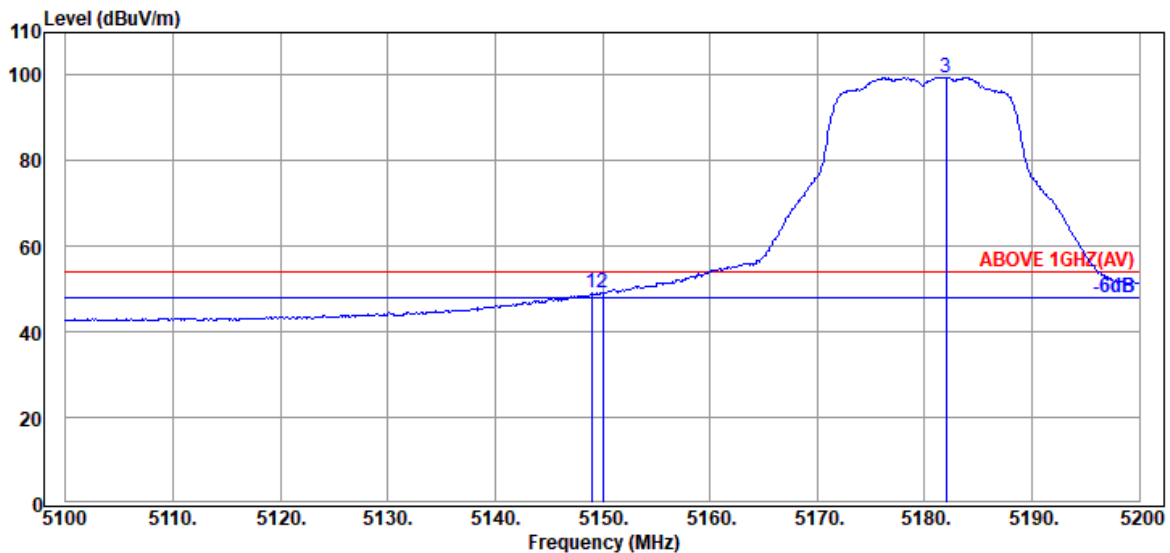


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.70	8.88	39.29	45.79	49.08	54.00	4.92	Average
5150.000	33.70	8.88	39.29	45.70	48.99	54.00	5.01	Average
@ 5182.000	33.70	8.90	39.28	96.28	99.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

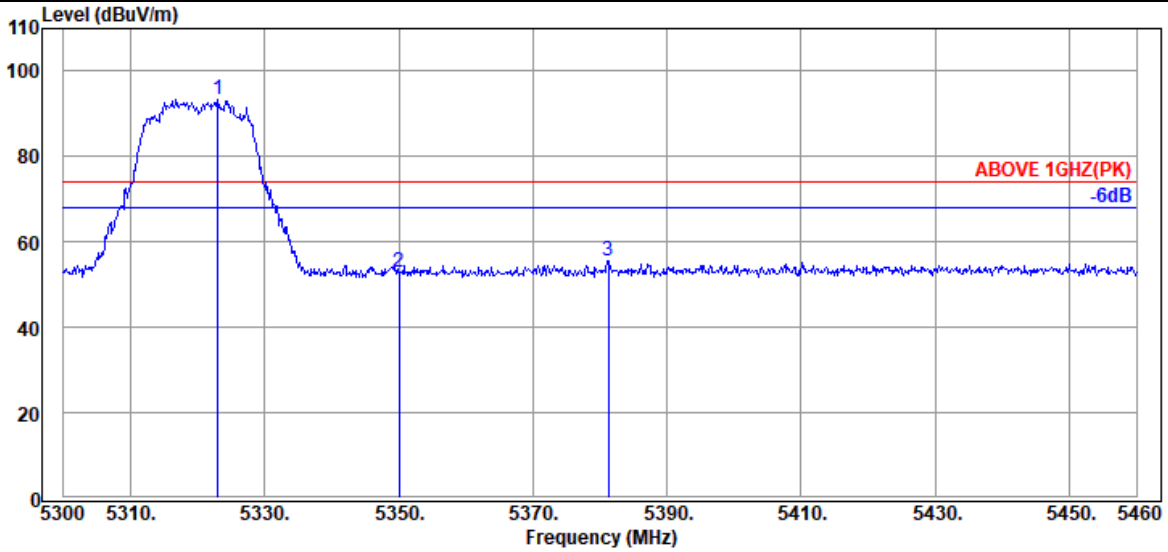

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.040	34.03	8.98	39.27	89.56	93.30	---	---	Peak
5350.080	33.90	8.99	39.27	49.27	52.89	74.00	21.11	Peak
5381.280	34.03	9.01	39.27	51.88	55.65	74.00	18.35	Peak

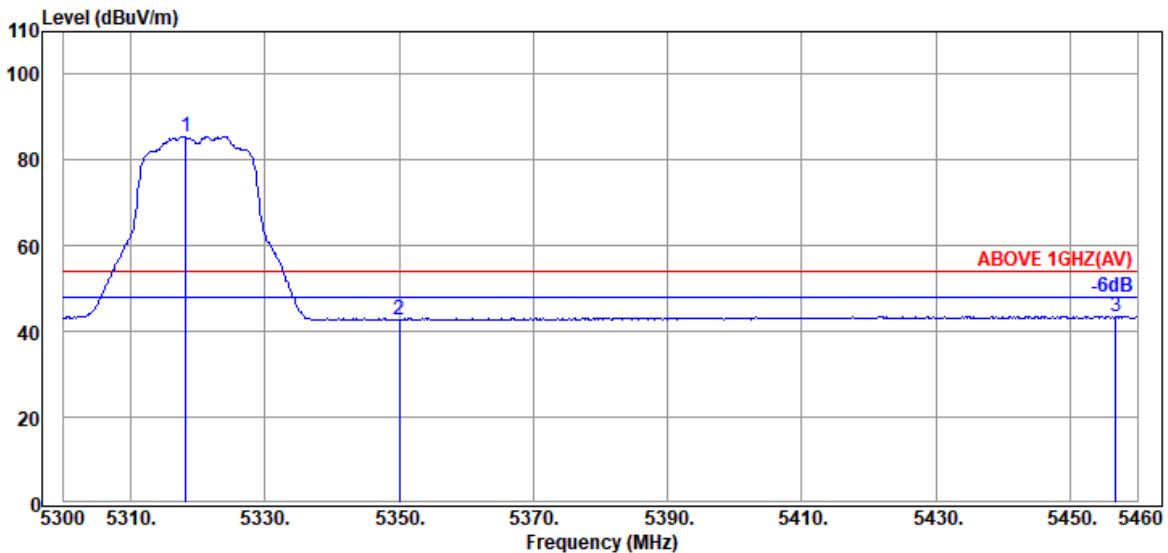


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.240	34.03	8.98	39.27	81.75	85.49	---	---	Average
5350.080	33.90	8.99	39.27	39.24	42.86	54.00	11.14	Average
5456.800	34.20	9.05	39.26	39.62	43.61	54.00	10.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

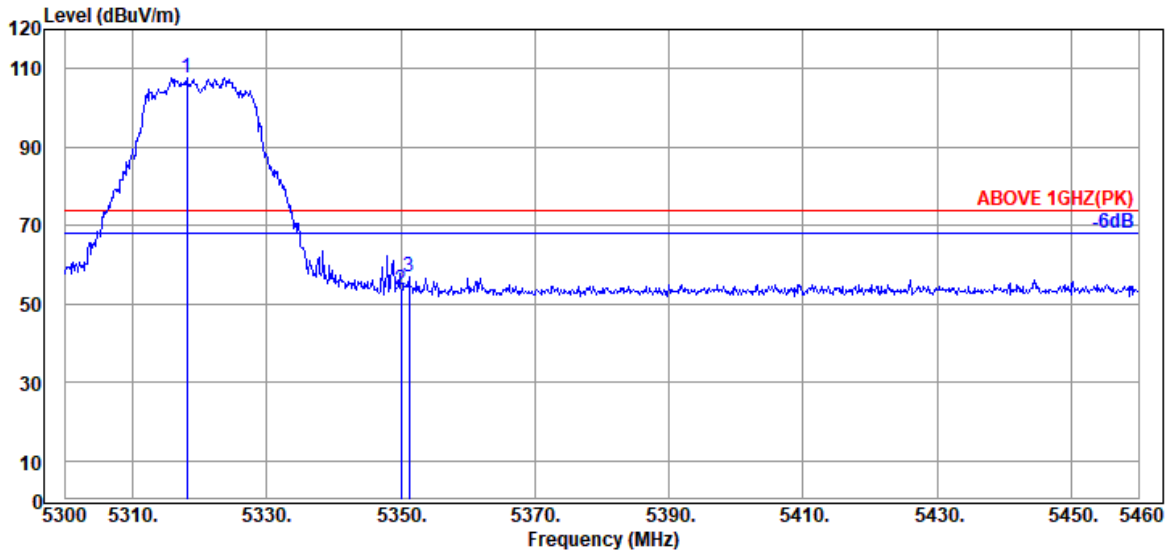

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5318.080	34.03	8.98	39.27	103.89	107.63	---	---	Peak
5350.080	33.90	8.99	39.27	50.01	53.63	74.00	20.37	Peak
5351.200	33.90	8.99	39.27	53.22	56.84	74.00	17.16	Peak

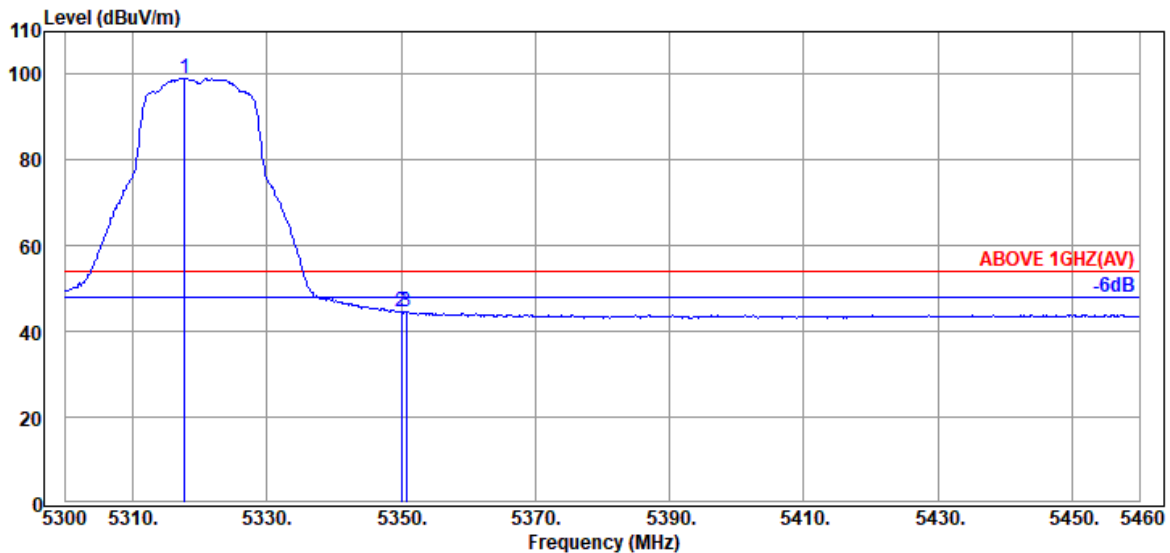


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5317.760	34.03	8.98	39.27	95.35	99.09	---	---	Average
5350.080	33.90	8.99	39.27	41.00	44.62	54.00	9.38	Average
5350.720	33.90	8.99	39.27	40.95	44.57	54.00	9.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

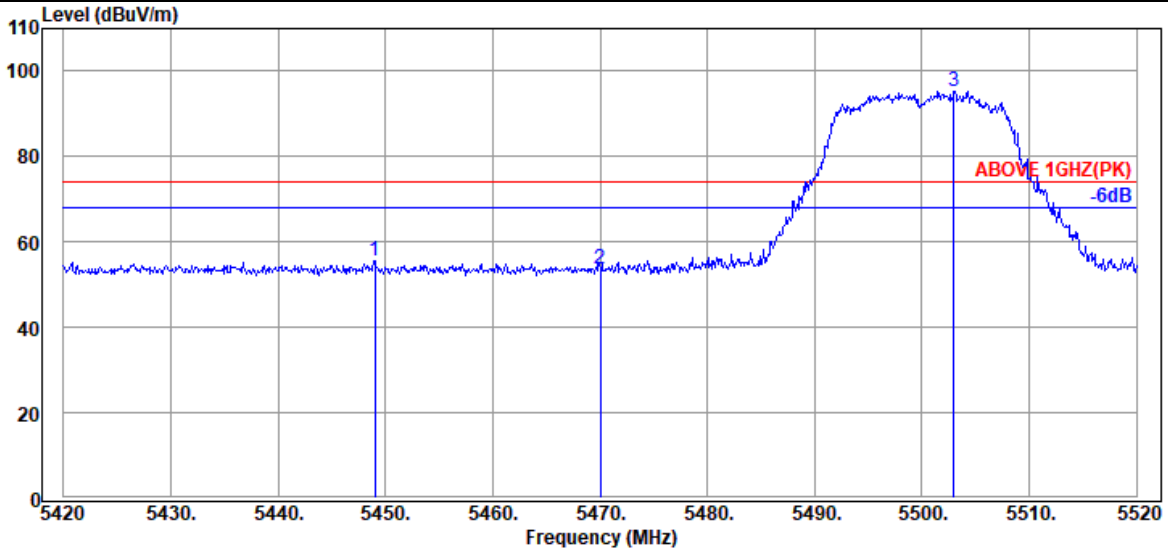

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.000	34.20	9.05	39.26	51.66	55.65	74.00	18.35	Peak
5470.000	34.17	9.06	39.26	49.57	53.54	74.00	20.46	Peak
@ 5503.000	34.10	9.08	39.26	91.48	95.40	---	---	Peak

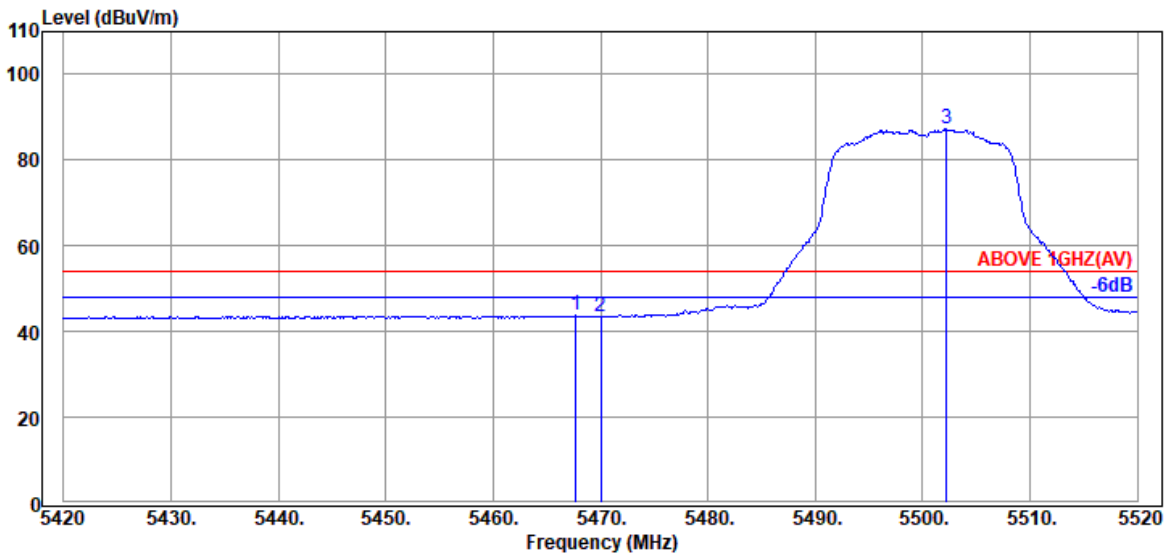


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.17	9.06	39.26	39.69	43.66	54.00	10.34	Average
5470.000	34.17	9.06	39.26	39.38	43.35	54.00	10.65	Average
@ 5502.200	34.10	9.08	39.26	83.46	87.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

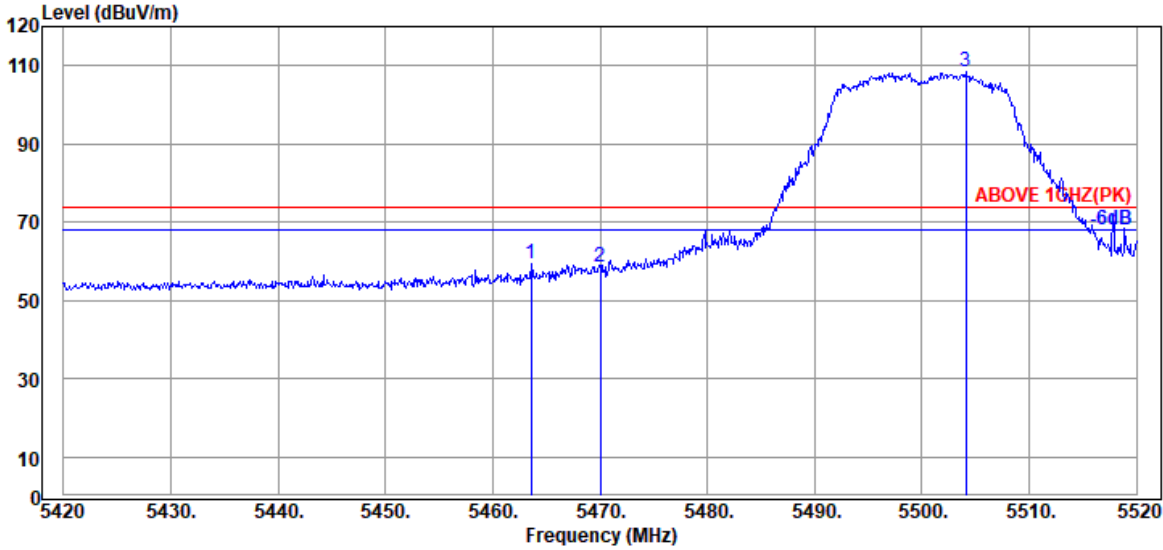

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.600	34.17	9.06	39.26	55.22	59.19	74.00	14.81	Peak
5470.000	34.17	9.06	39.26	54.40	58.37	74.00	15.63	Peak
@ 5504.100	34.10	9.08	39.26	104.60	108.52	---	---	Peak

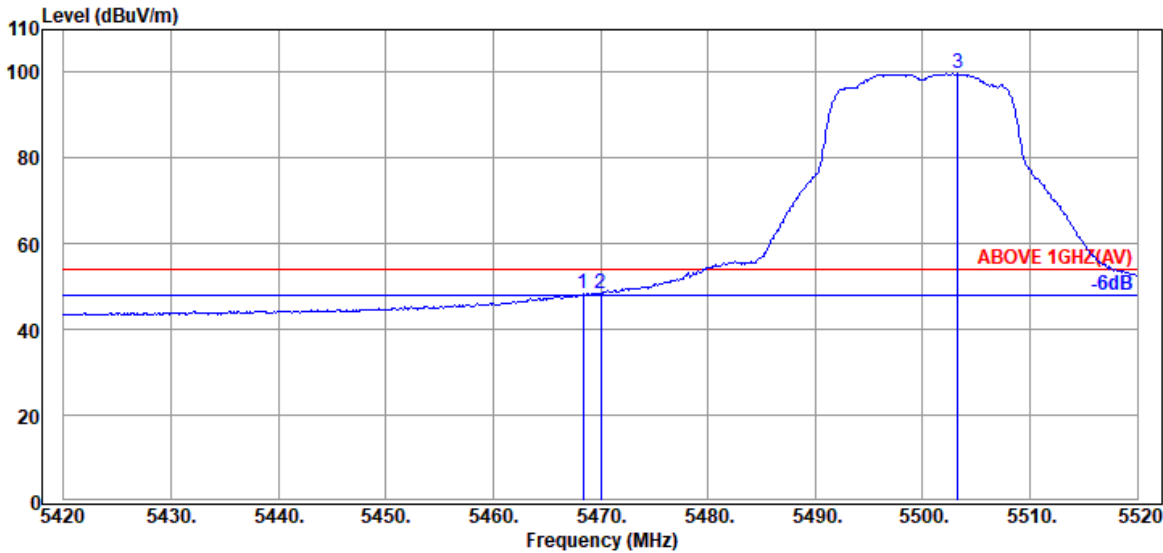


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.17	9.06	39.26	44.35	48.32	54.00	5.68	Average
5470.000	34.17	9.06	39.26	44.58	48.55	54.00	5.45	Average
@ 5503.300	34.10	9.08	39.26	95.84	99.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

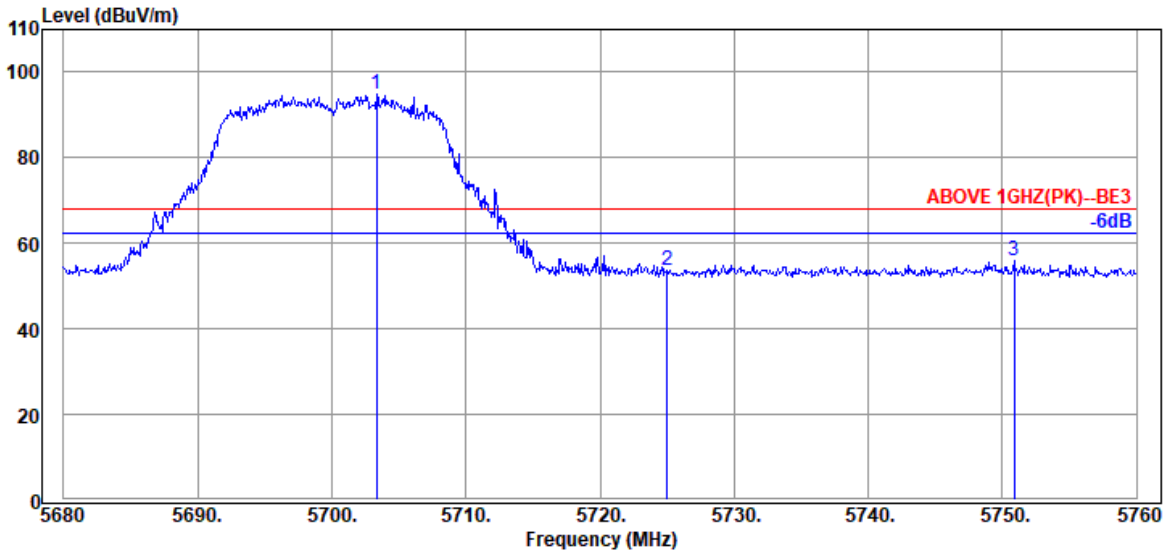

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.360	33.80	9.18	39.30	91.15	94.83	---	---	Peak
5725.040	33.80	9.20	39.30	49.87	53.57	68.20	14.63	Peak
5750.880	33.80	9.20	39.31	52.11	55.80	68.20	12.40	Peak

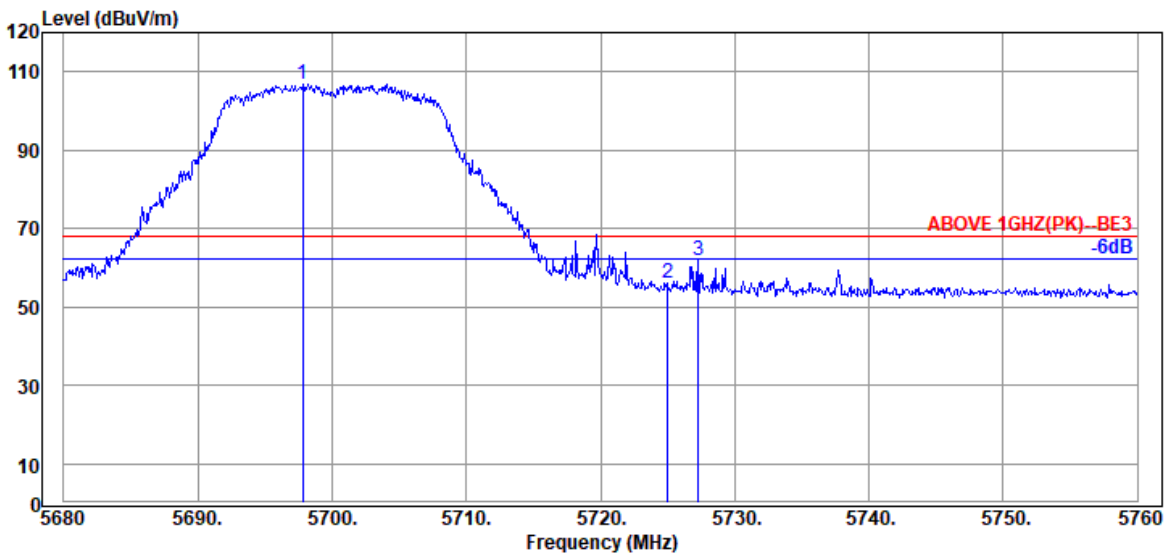


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.840	33.80	9.18	39.30	103.22	106.90	---	---	Peak
5725.040	33.80	9.20	39.30	52.58	56.28	68.20	11.92	Peak
5727.280	33.80	9.20	39.31	58.32	62.01	68.20	6.19	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

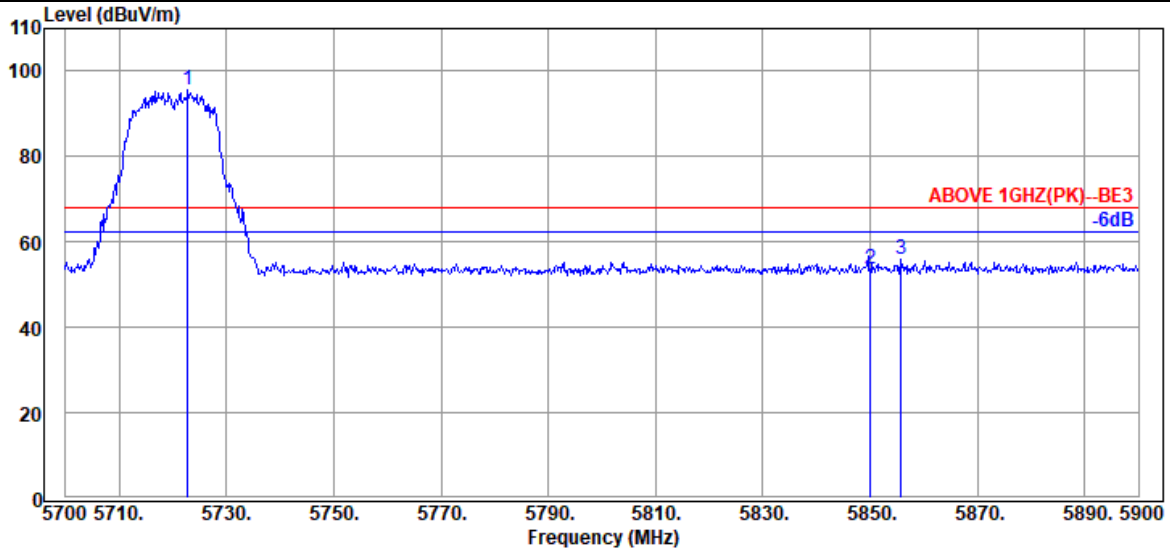

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	33.80	9.20	39.30	91.90	95.60	---	---	Peak
5850.000	34.10	9.25	39.33	49.76	53.78	68.20	14.42	Peak
5855.800	34.10	9.25	39.33	51.80	55.82	68.20	12.38	Peak

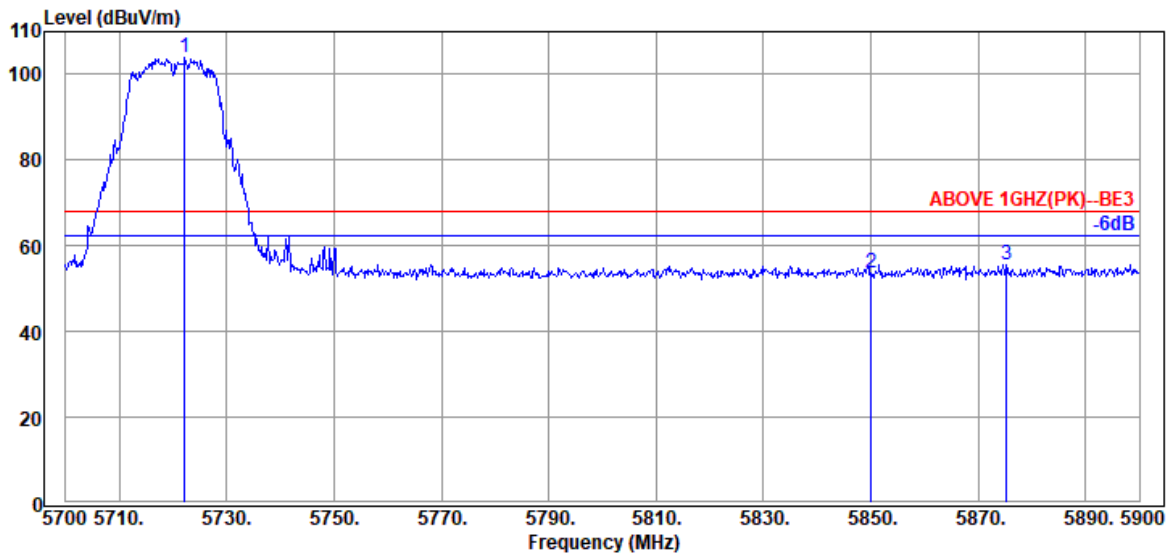


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.200	33.80	9.20	39.30	100.12	103.82	---	---	Peak
5850.000	34.10	9.25	39.33	49.50	53.52	68.20	14.68	Peak
5875.200	34.10	9.27	39.33	51.60	55.64	68.20	12.56	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

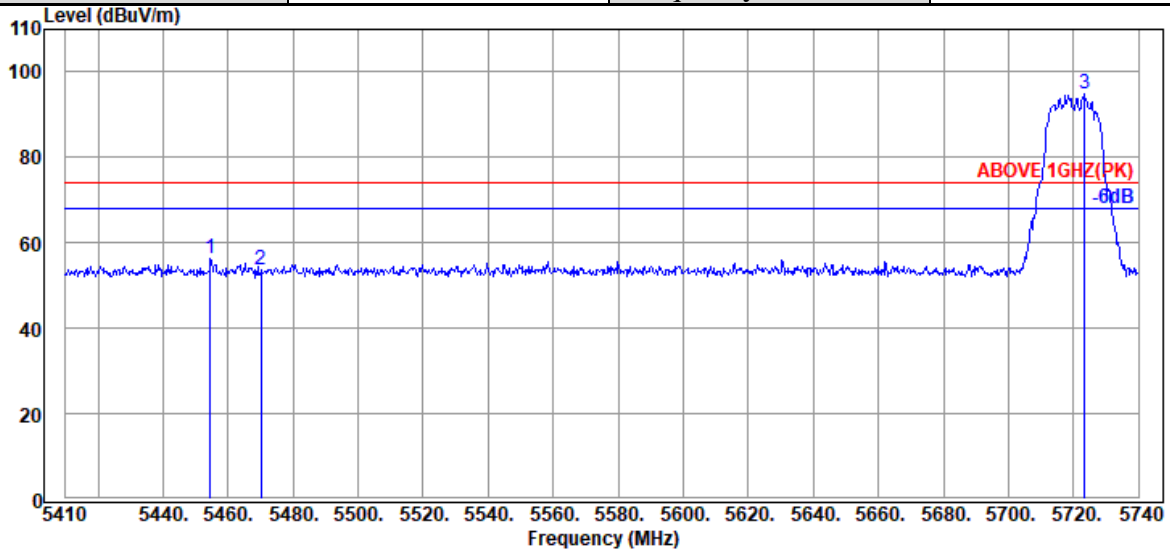

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.550	34.20	9.05	39.26	52.31	56.30	74.00	17.70	Peak
5470.060	34.17	9.06	39.26	49.87	53.84	74.00	20.16	Peak
@ 5723.500	33.80	9.20	39.30	91.19	94.89	---	---	Peak

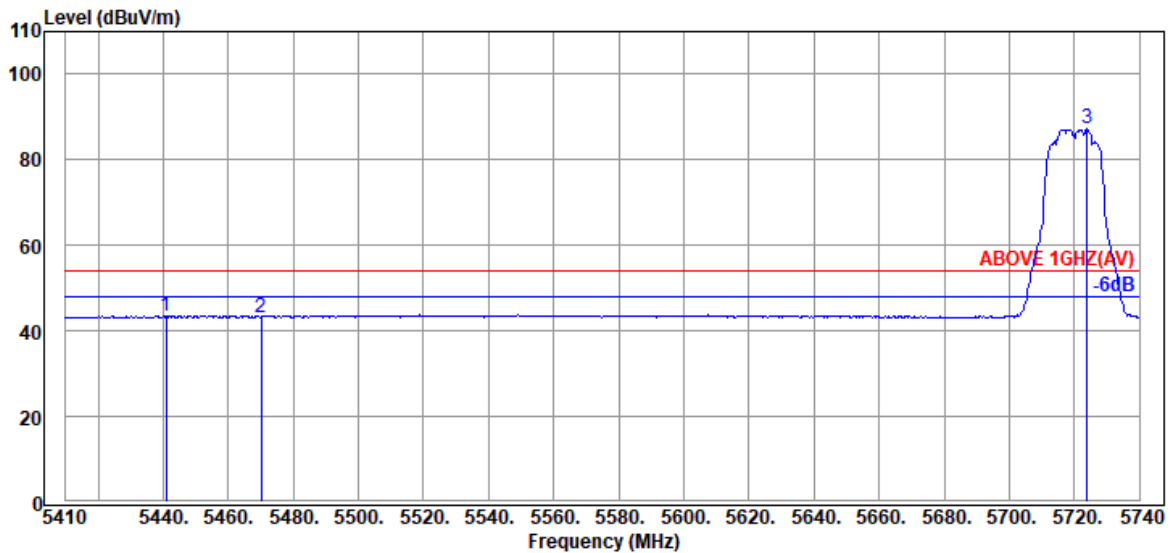


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.020	34.17	9.04	39.26	39.59	43.54	54.00	10.46	Average
5470.060	34.17	9.06	39.26	39.28	43.25	54.00	10.75	Average
@ 5723.830	33.80	9.20	39.30	83.57	87.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

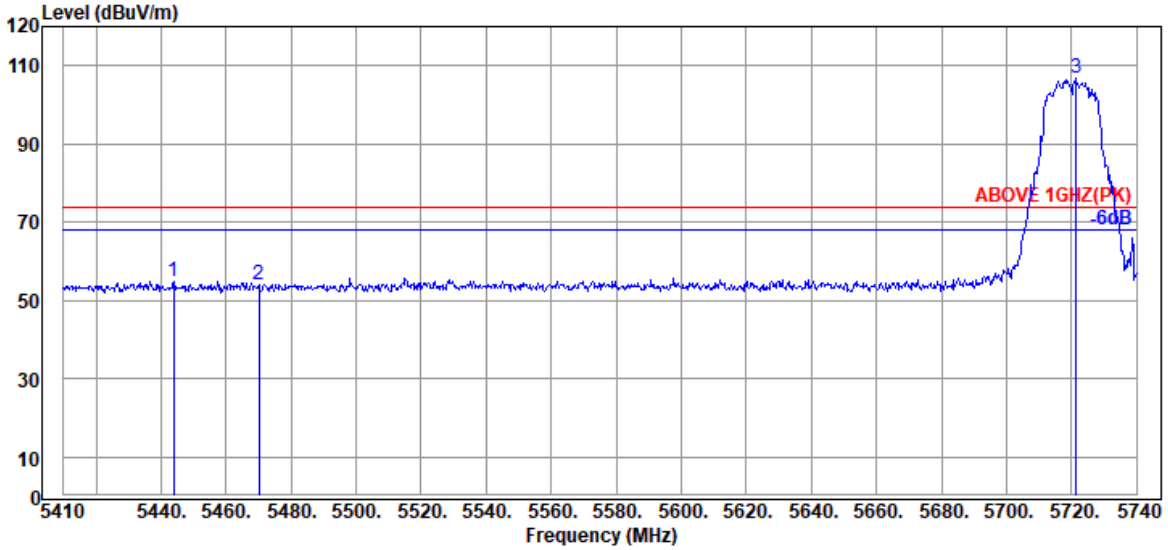

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.990	34.17	9.04	39.26	50.87	54.82	74.00	19.18	Peak
5470.060	34.17	9.06	39.26	49.89	53.86	74.00	20.14	Peak
@ 5721.520	33.80	9.19	39.30	102.96	106.65	---	---	Peak

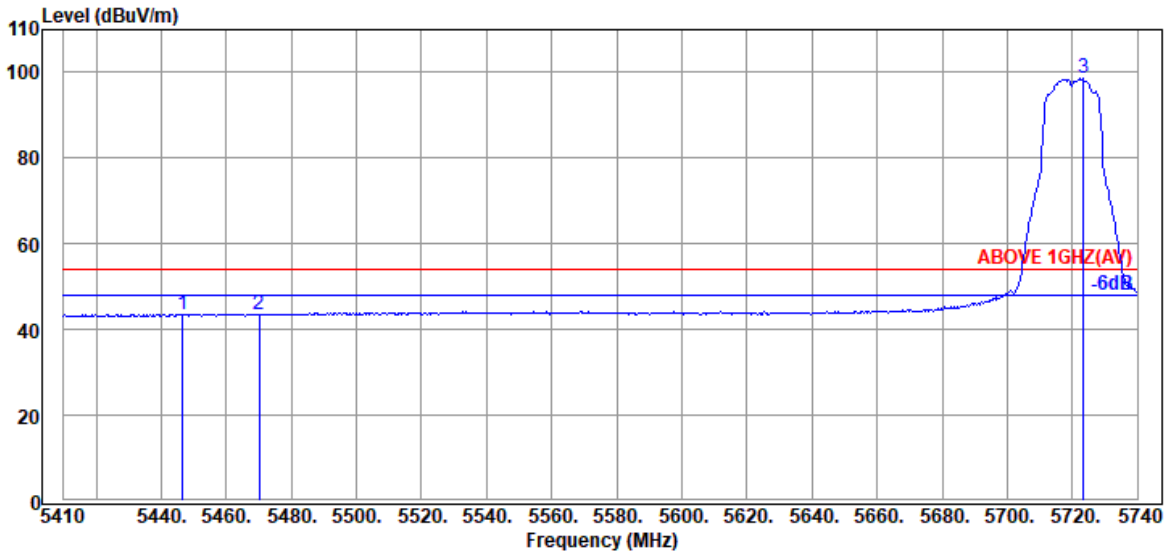


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.630	34.17	9.04	39.26	39.68	43.63	54.00	10.37	Average
5470.060	34.17	9.06	39.26	39.34	43.31	54.00	10.69	Average
@ 5723.500	33.80	9.20	39.30	94.84	98.54	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

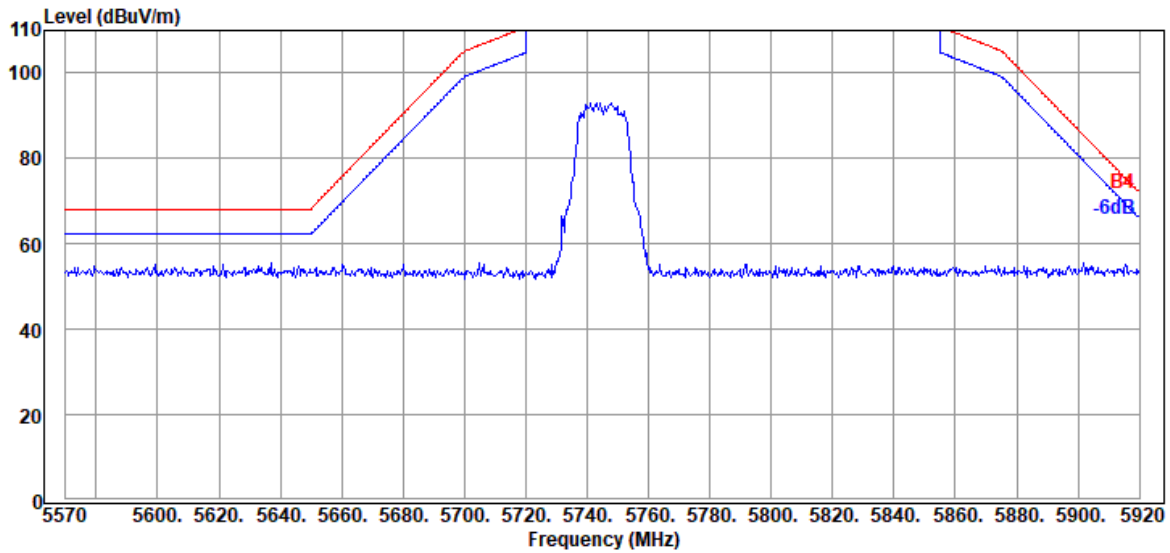


Antenna at Vertical Polarization

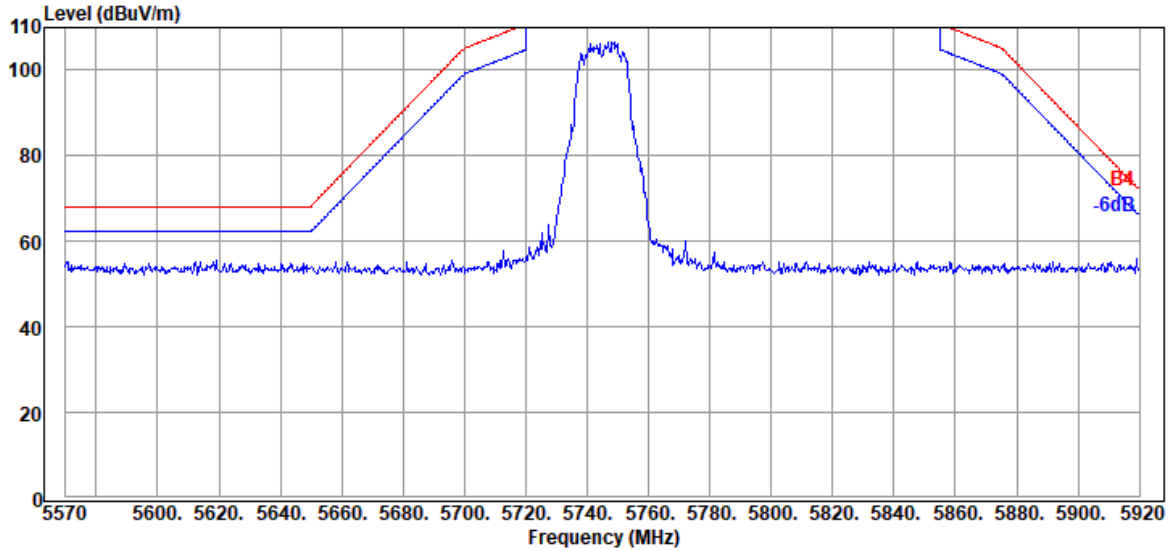


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

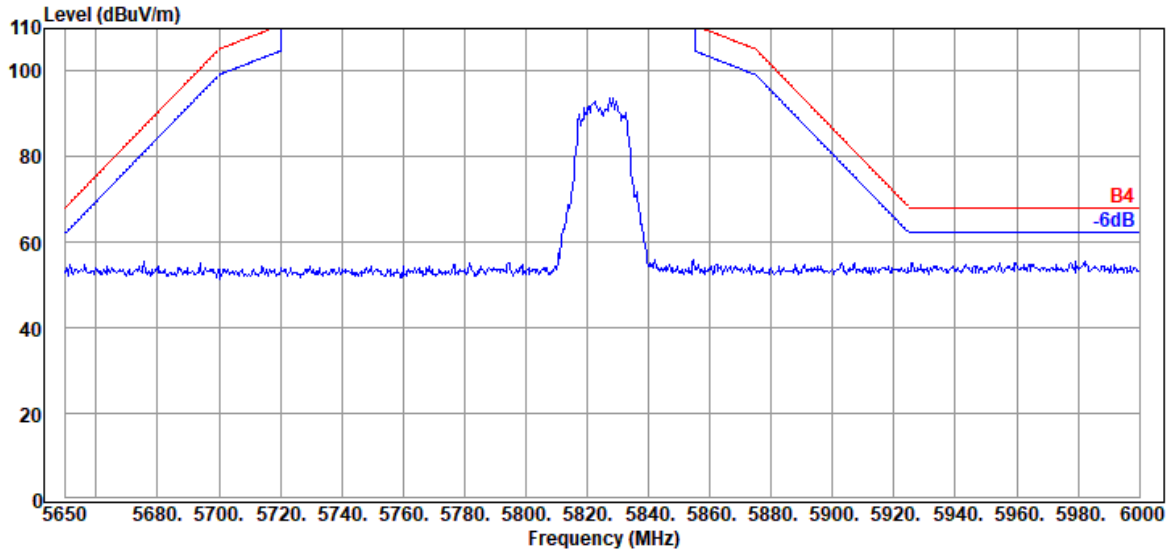

Antenna at Vertical Polarization

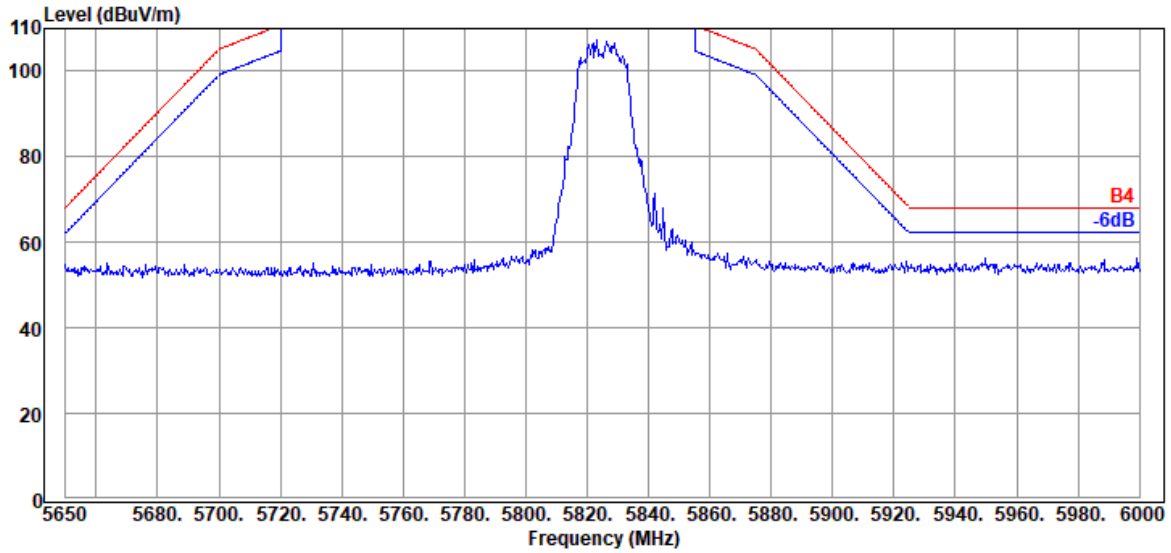


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

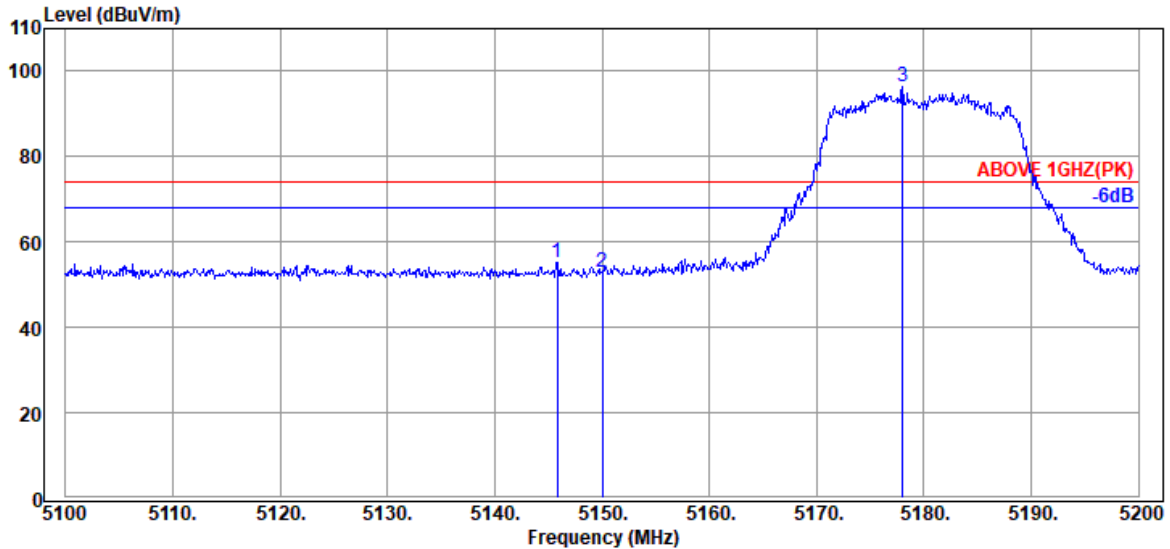

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.800	33.70	8.88	39.29	52.04	55.33	74.00	18.67	Peak
5150.000	33.70	8.88	39.29	49.81	53.10	74.00	20.90	Peak
@ 5178.000	33.70	8.90	39.28	92.91	96.23	---	---	Peak

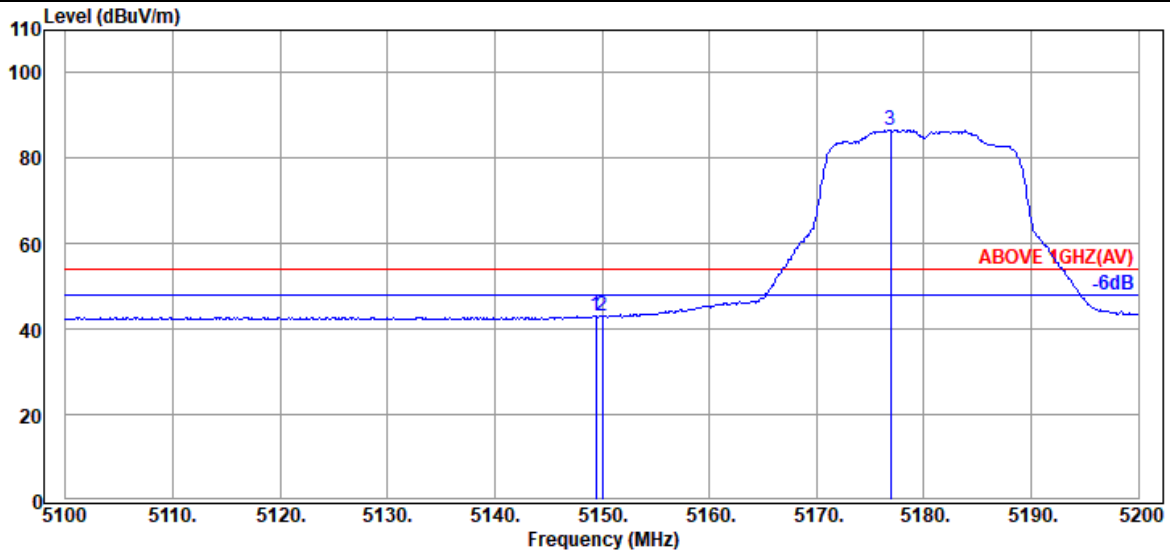


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.88	39.29	39.74	43.03	54.00	10.97	Average
5150.000	33.70	8.88	39.29	39.75	43.04	54.00	10.96	Average
@ 5176.900	33.70	8.90	39.28	83.36	86.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

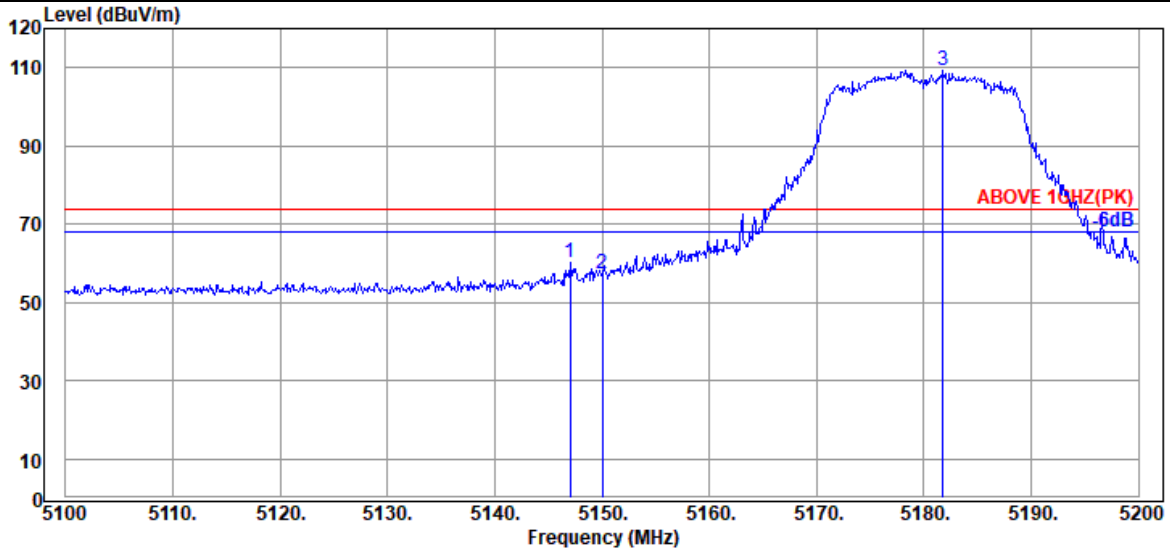

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.70	8.88	39.29	57.05	60.34	74.00	13.66	Peak
5150.000	33.70	8.88	39.29	53.94	57.23	74.00	16.77	Peak
@ 5181.800	33.70	8.90	39.28	106.15	109.47	---	---	Peak

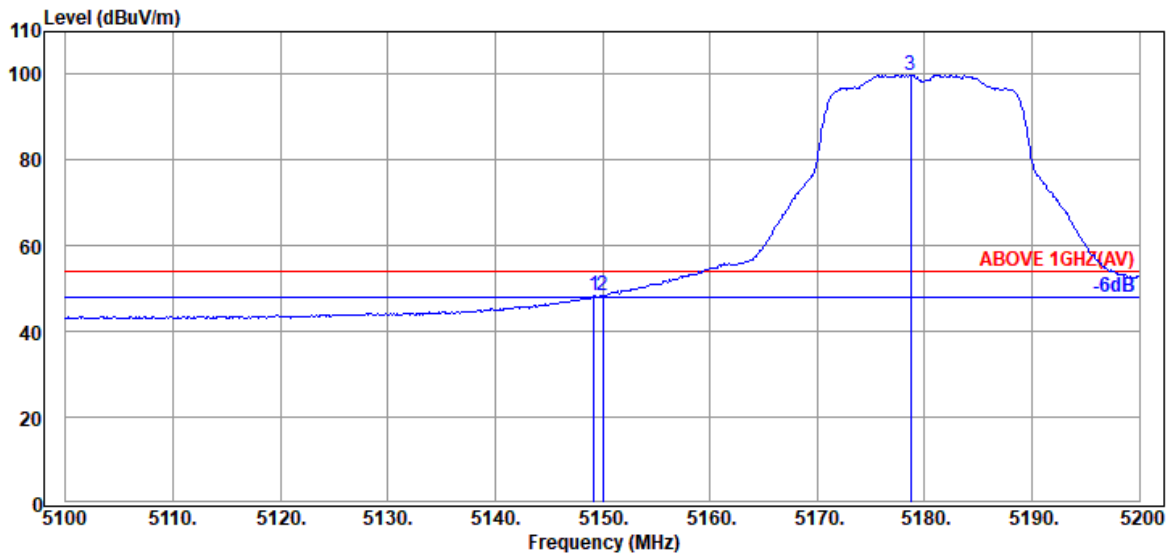


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.70	8.88	39.29	45.12	48.41	54.00	5.59	Average
5150.000	33.70	8.88	39.29	45.03	48.32	54.00	5.68	Average
@ 5178.700	33.70	8.90	39.28	96.55	99.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

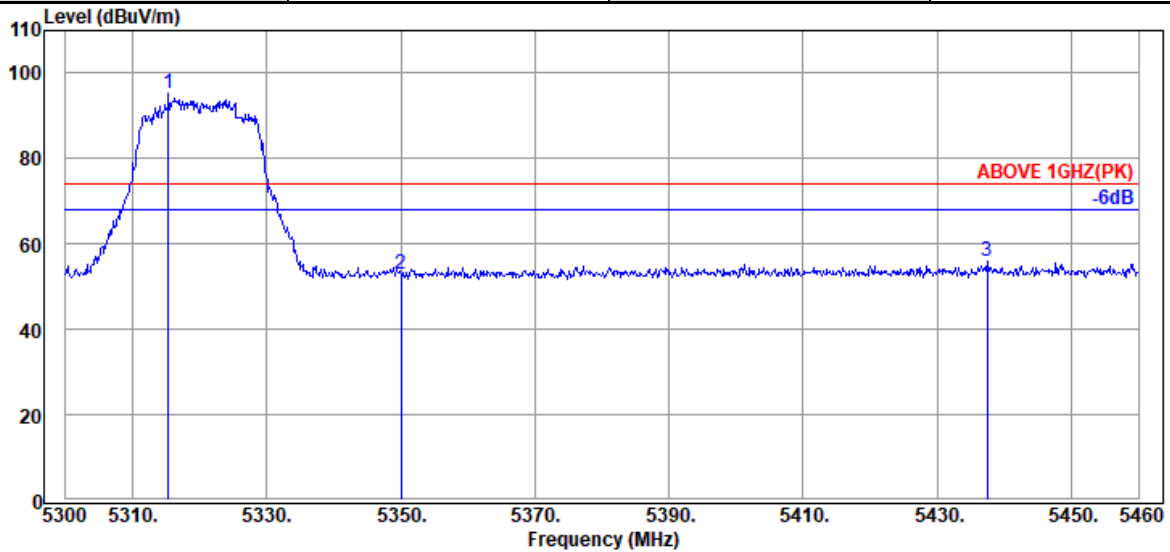

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.360	34.03	8.98	39.27	91.60	95.34	---	---	Peak
5350.080	33.90	8.99	39.27	49.19	52.81	74.00	21.19	Peak
5437.440	34.17	9.04	39.26	51.87	55.82	74.00	18.18	Peak

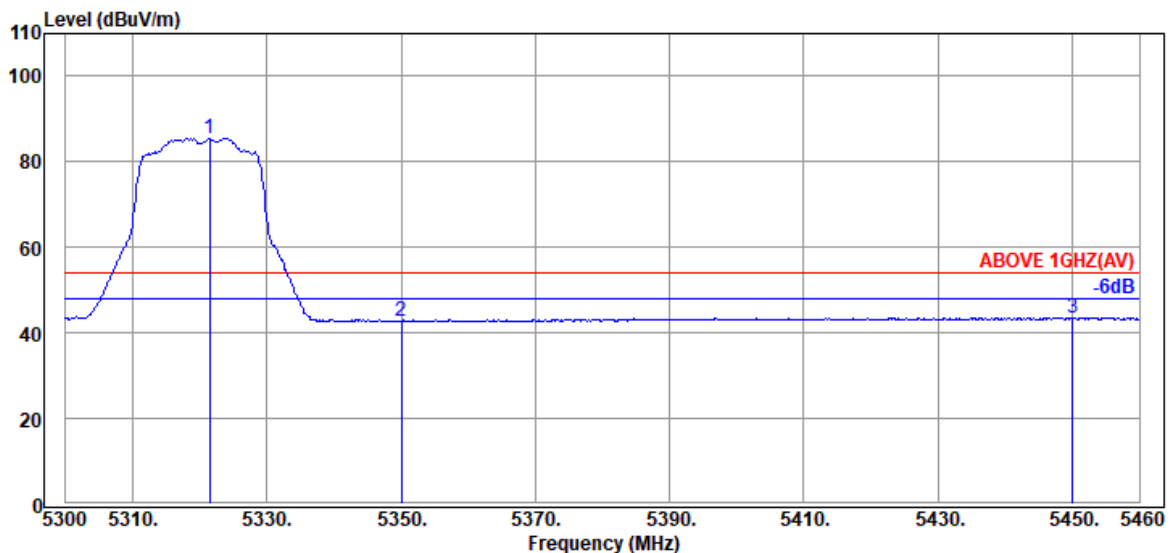


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.440	34.03	8.98	39.27	81.88	85.62	---	---	Average
5350.080	33.90	8.99	39.27	39.15	42.77	54.00	11.23	Average
5450.080	34.20	9.05	39.26	39.62	43.61	54.00	10.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

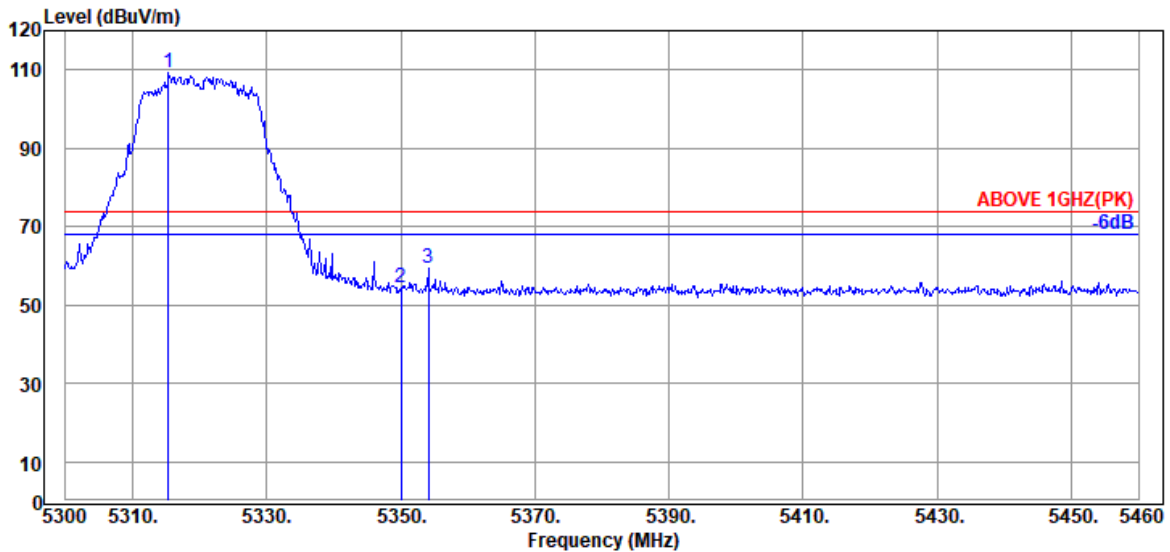

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.360	34.03	8.98	39.27	105.36	109.10	---	---	Peak
5350.080	33.90	8.99	39.27	50.68	54.30	74.00	19.70	Peak
5354.080	33.90	8.99	39.27	55.56	59.18	74.00	14.82	Peak

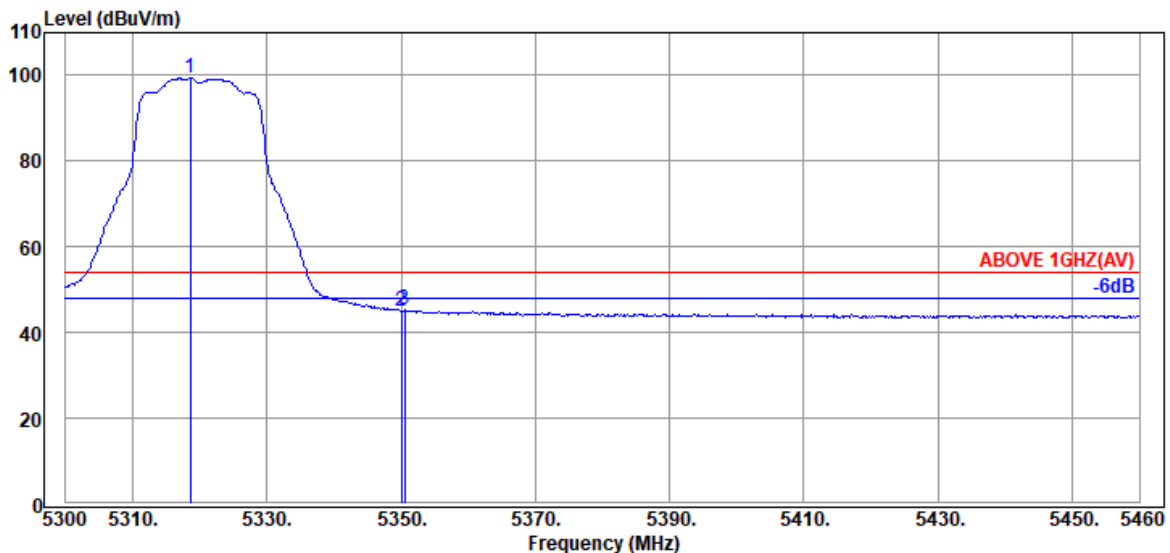


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.560	34.03	8.98	39.27	95.72	99.46	---	---	Average
5350.080	33.90	8.99	39.27	41.36	44.98	54.00	9.02	Average
5350.560	33.90	8.99	39.27	41.61	45.23	54.00	8.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

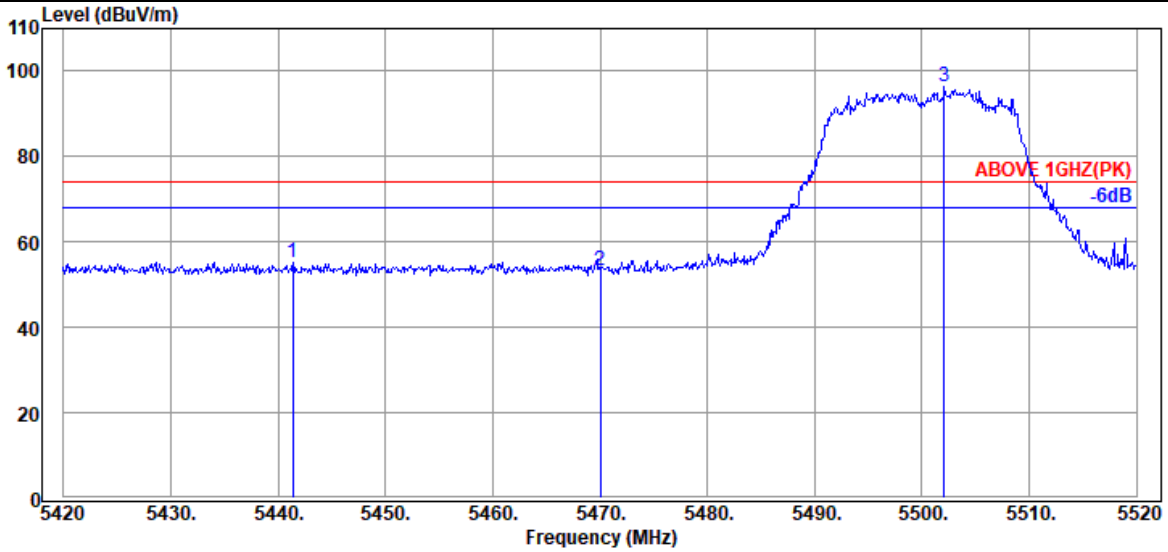

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.400	34.17	9.04	39.26	51.17	55.12	74.00	18.88	Peak
5470.000	34.17	9.06	39.26	49.25	53.22	74.00	20.78	Peak
@ 5502.100	34.10	9.08	39.26	92.33	96.25	---	---	Peak

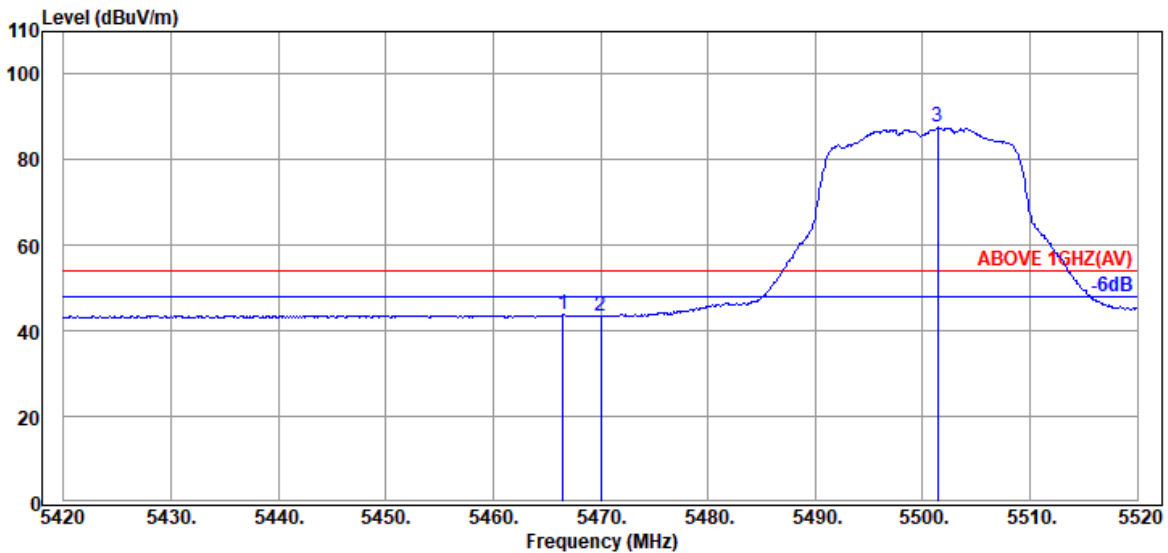


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.17	9.06	39.26	39.78	43.75	54.00	10.25	Average
5470.000	34.17	9.06	39.26	39.52	43.49	54.00	10.51	Average
@ 5501.400	34.10	9.08	39.26	83.68	87.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

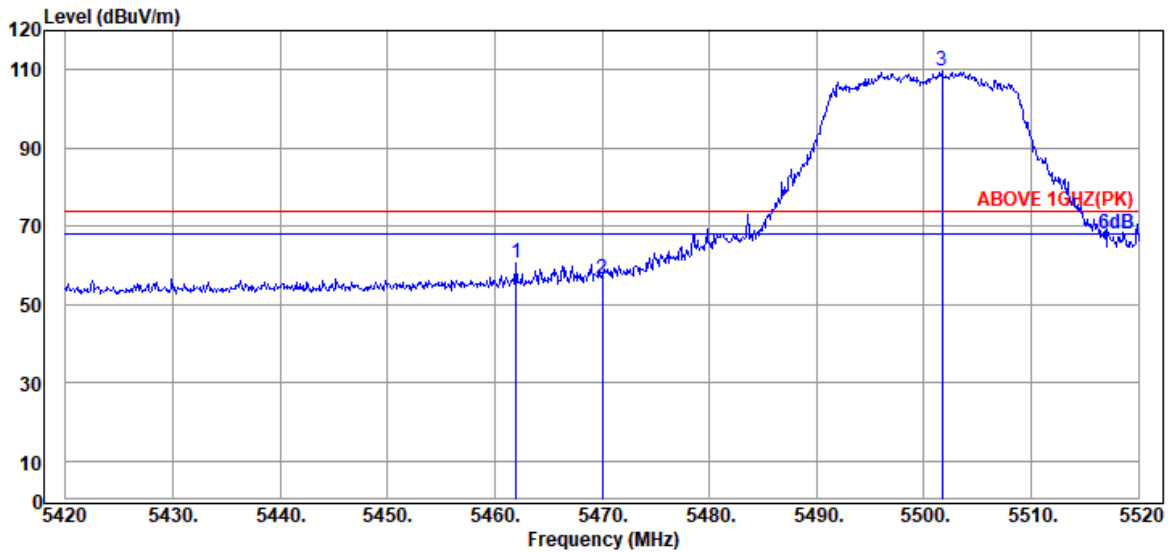

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.20	9.05	39.26	56.64	60.63	74.00	13.37	Peak
5470.000	34.17	9.06	39.26	52.54	56.51	74.00	17.49	Peak
@ 5501.700	34.10	9.08	39.26	105.82	109.74	---	---	Peak

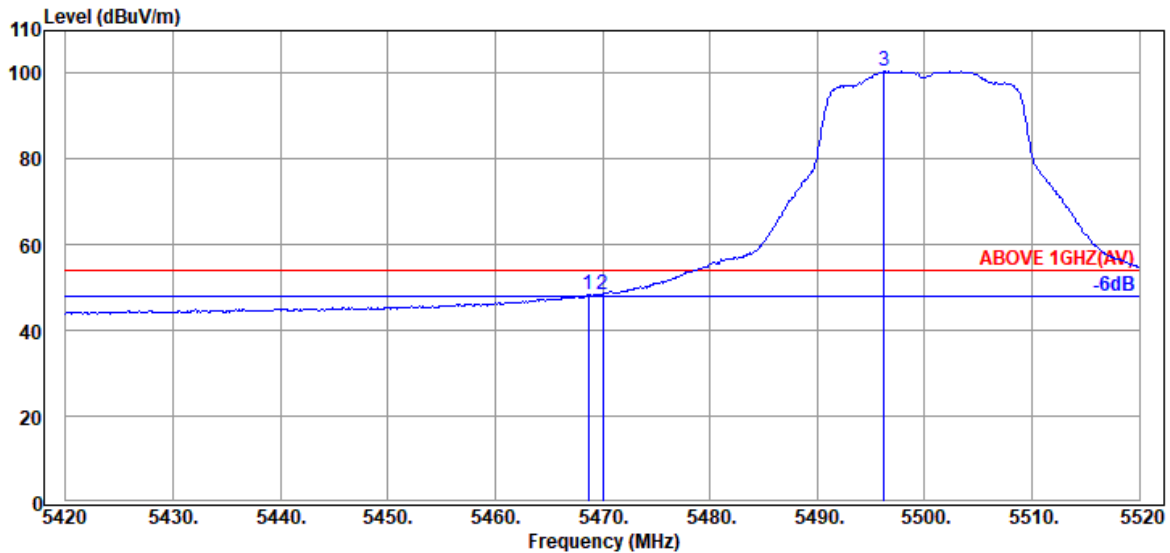


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.17	9.06	39.26	44.51	48.48	54.00	5.52	Average
5470.000	34.17	9.06	39.26	44.51	48.48	54.00	5.52	Average
@ 5496.200	34.10	9.08	39.26	96.52	100.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

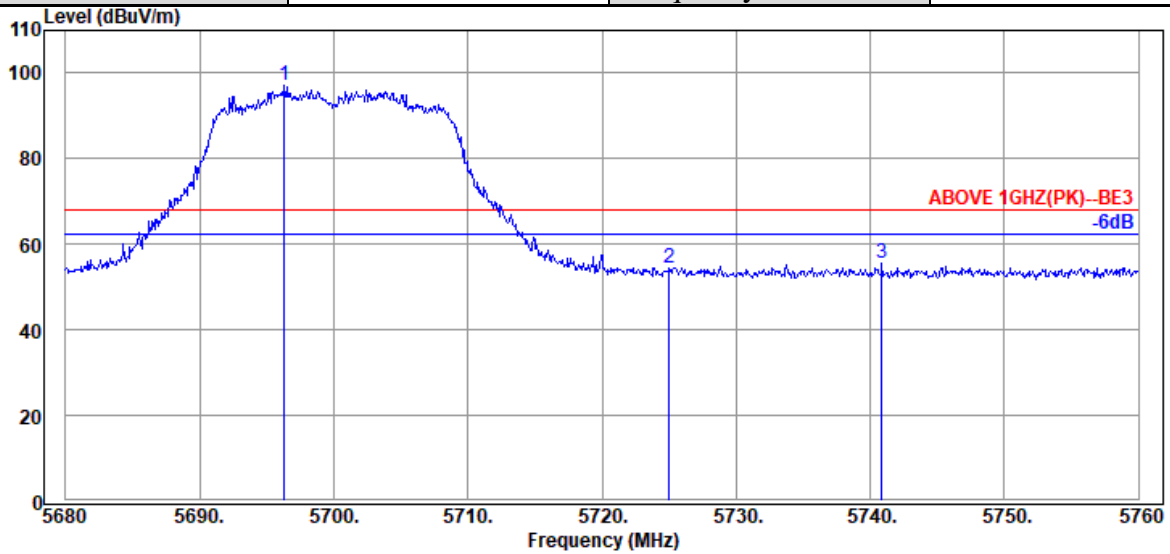

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.320	33.80	9.18	39.30	93.40	97.08	---	---	Peak
5725.040	33.80	9.20	39.30	50.79	54.49	68.20	13.71	Peak
5740.880	33.80	9.20	39.31	51.83	55.52	68.20	12.68	Peak

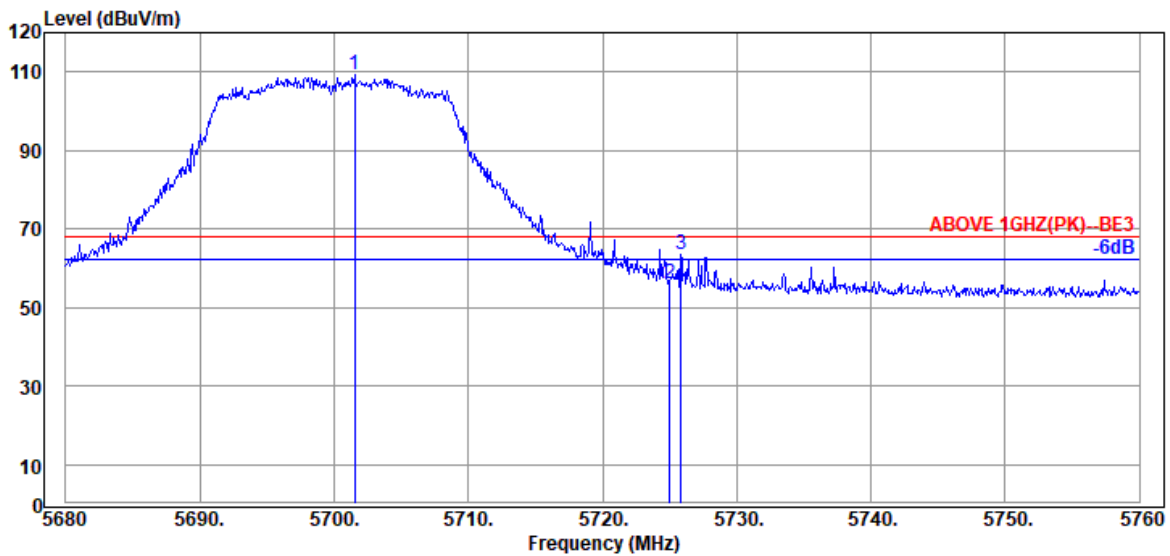


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.520	33.80	9.18	39.30	105.51	109.19	---	---	Peak
5725.040	33.80	9.20	39.30	52.25	55.95	68.20	12.25	Peak
5725.840	33.80	9.20	39.30	59.66	63.36	68.20	4.84	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

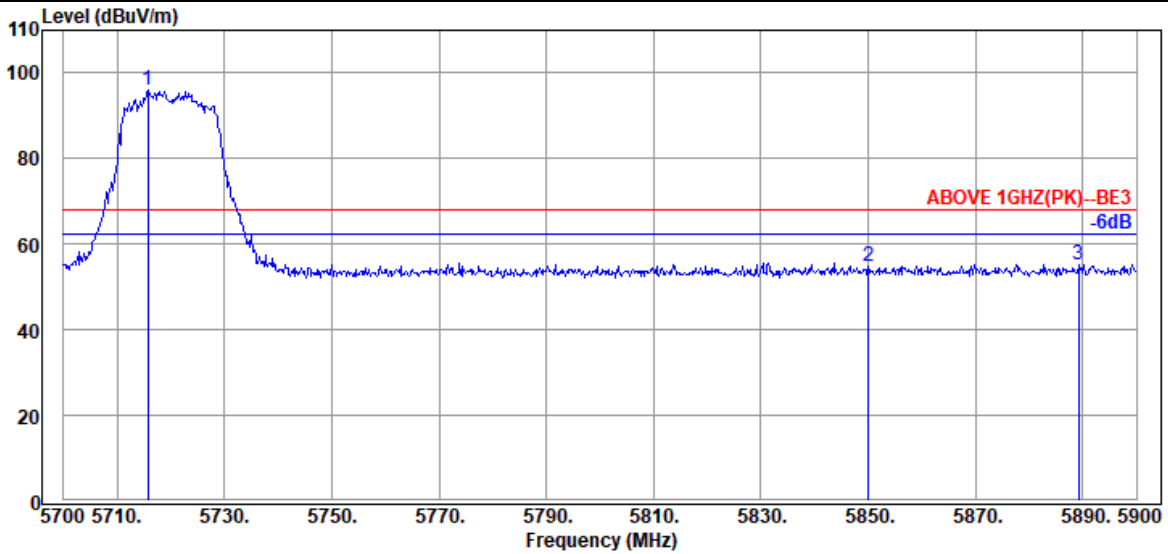

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.800	33.80	9.19	39.30	92.16	95.85	---	---	Peak
5850.000	34.10	9.25	39.33	50.61	54.63	68.20	13.57	Peak
5889.200	34.10	9.27	39.34	51.32	55.35	68.20	12.85	Peak

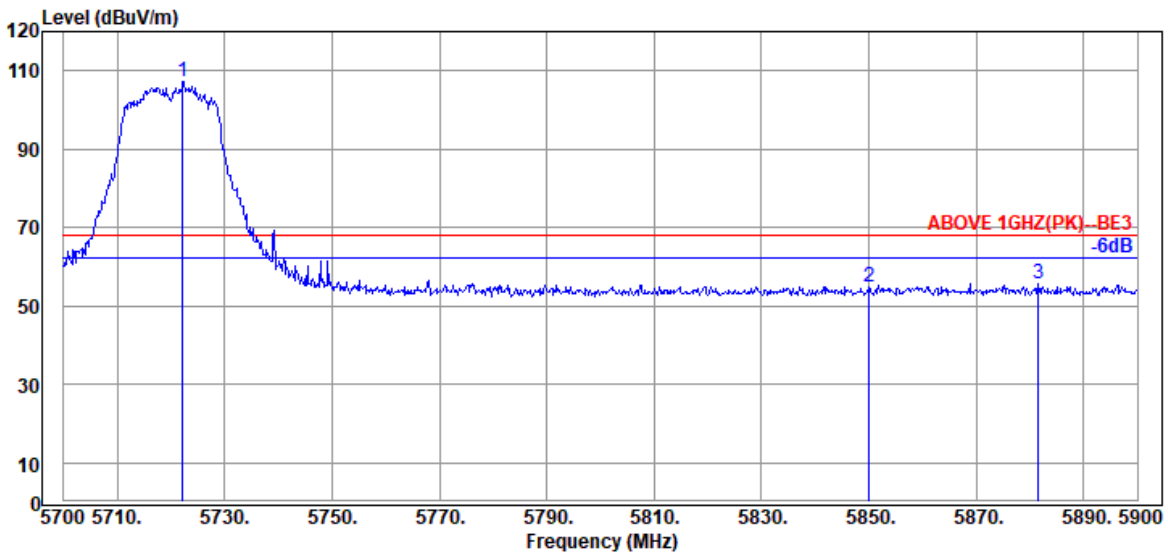


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.200	33.80	9.20	39.30	103.44	107.14	---	---	Peak
5850.000	34.10	9.25	39.33	50.67	54.69	68.20	13.51	Peak
5881.600	34.10	9.27	39.34	51.66	55.69	68.20	12.51	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

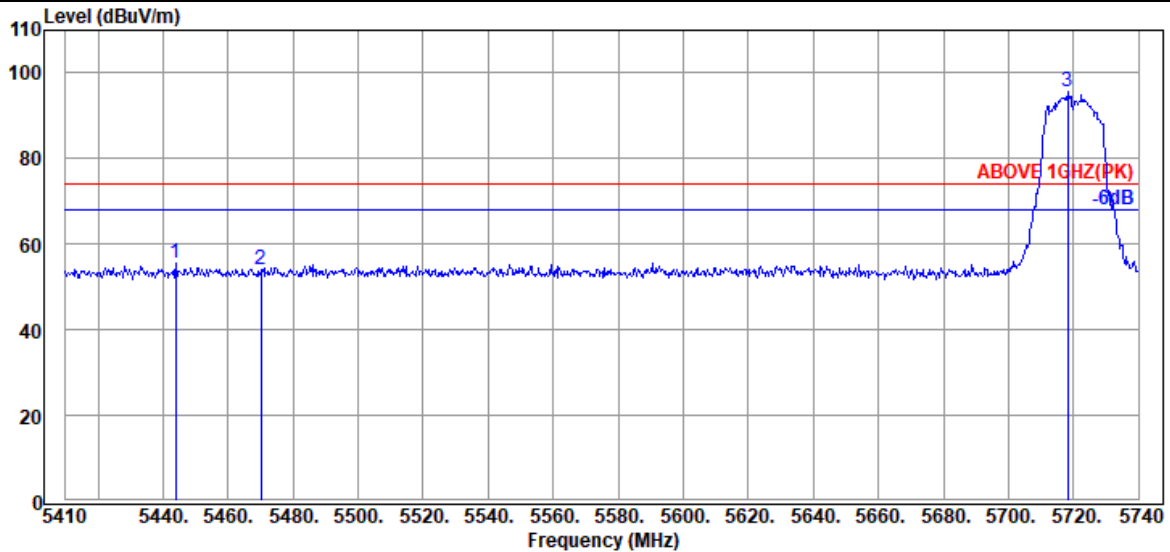

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.990	34.17	9.04	39.26	51.49	55.44	74.00	18.56	Peak
5470.060	34.17	9.06	39.26	50.07	54.04	74.00	19.96	Peak
@ 5718.220	33.80	9.19	39.30	92.05	95.74	---	---	Peak

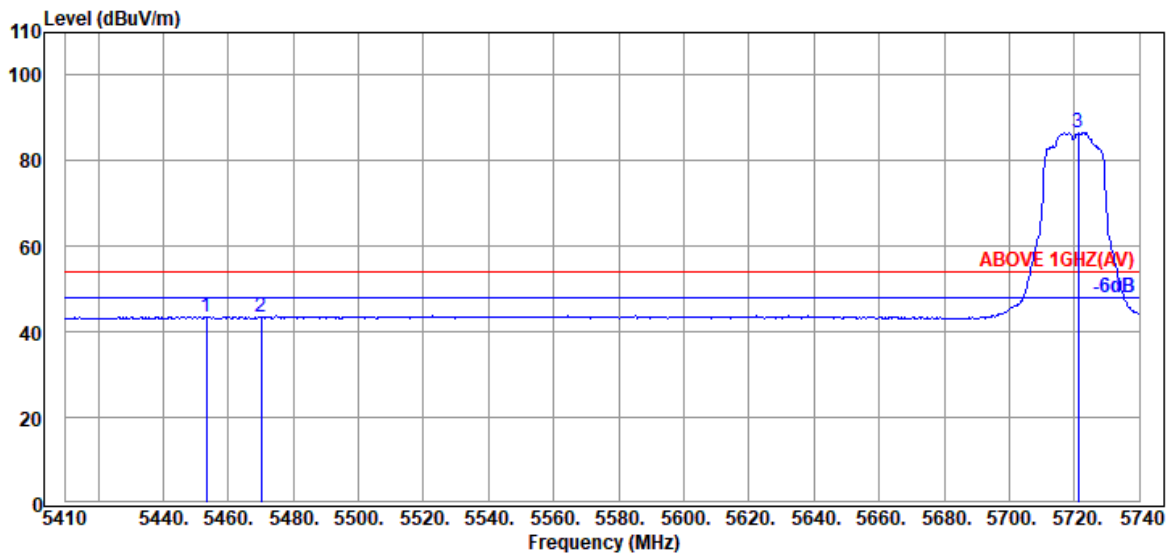


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.230	34.20	9.05	39.26	39.66	43.65	54.00	10.35	Average
5470.060	34.17	9.06	39.26	39.35	43.32	54.00	10.68	Average
@ 5721.190	33.80	9.19	39.30	82.89	86.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

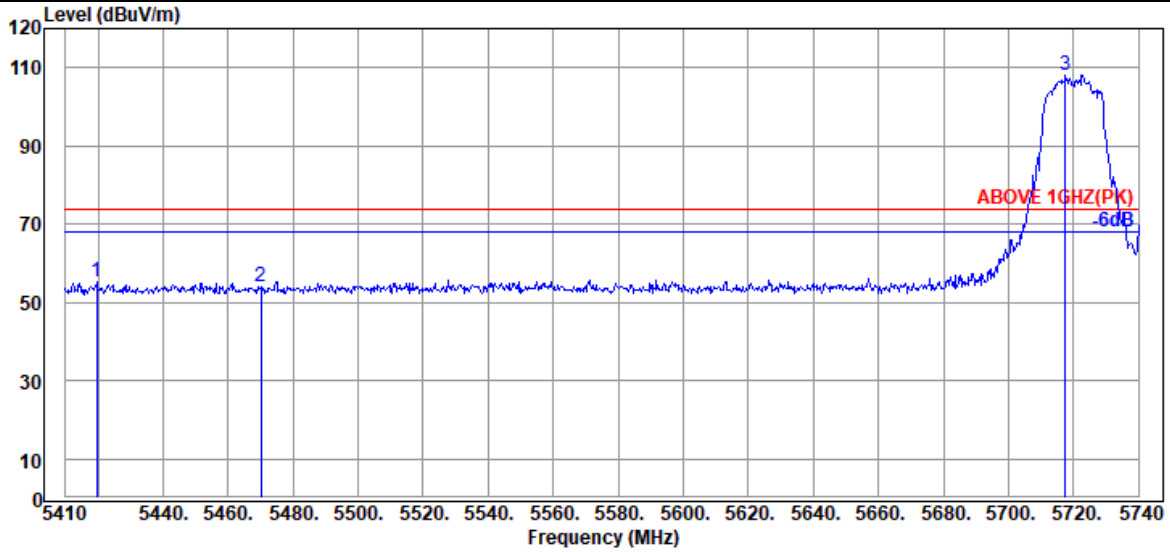

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.570	34.15	9.04	39.27	51.31	55.23	74.00	18.77	Peak
5470.060	34.17	9.06	39.26	49.91	53.88	74.00	20.12	Peak
@ 5717.560	33.80	9.19	39.30	104.41	108.10	---	---	Peak

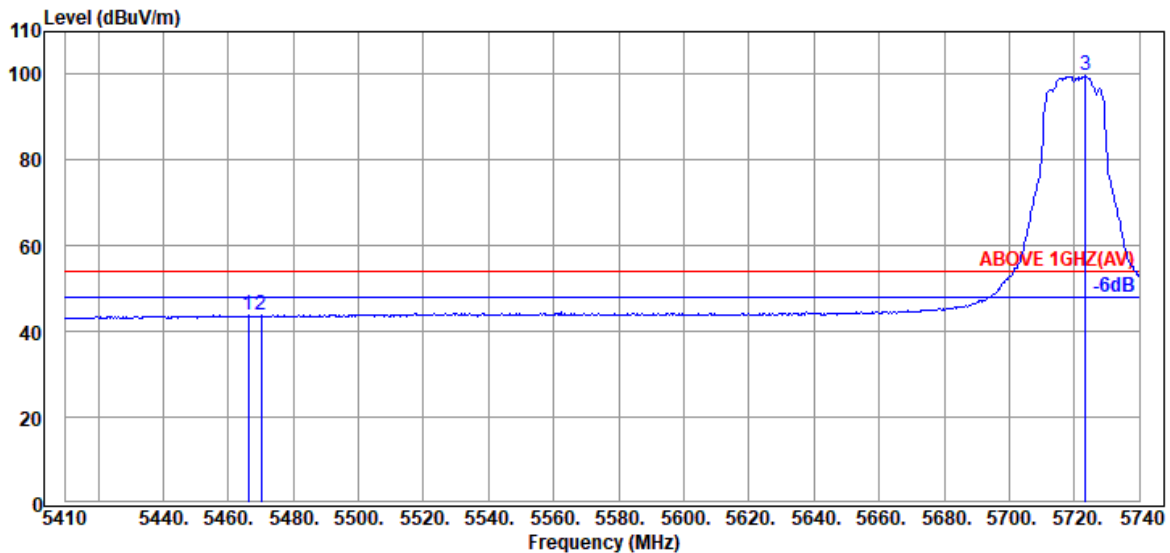


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	9.06	39.26	39.76	43.73	54.00	10.27	Average
5470.060	34.17	9.06	39.26	39.82	43.79	54.00	10.21	Average
@ 5723.500	33.80	9.20	39.30	96.07	99.77	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

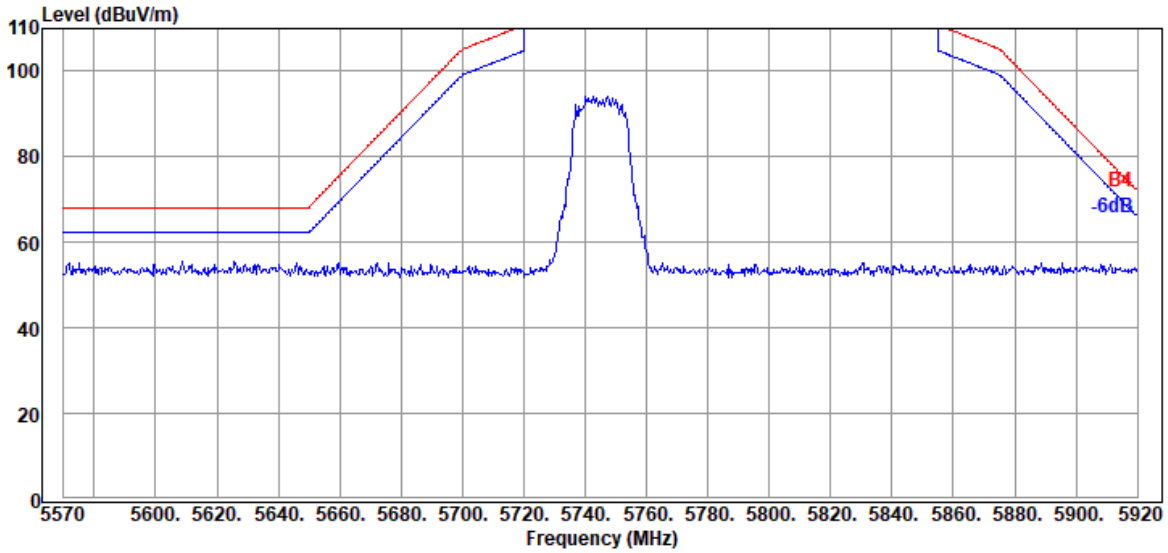


Antenna at Vertical Polarization

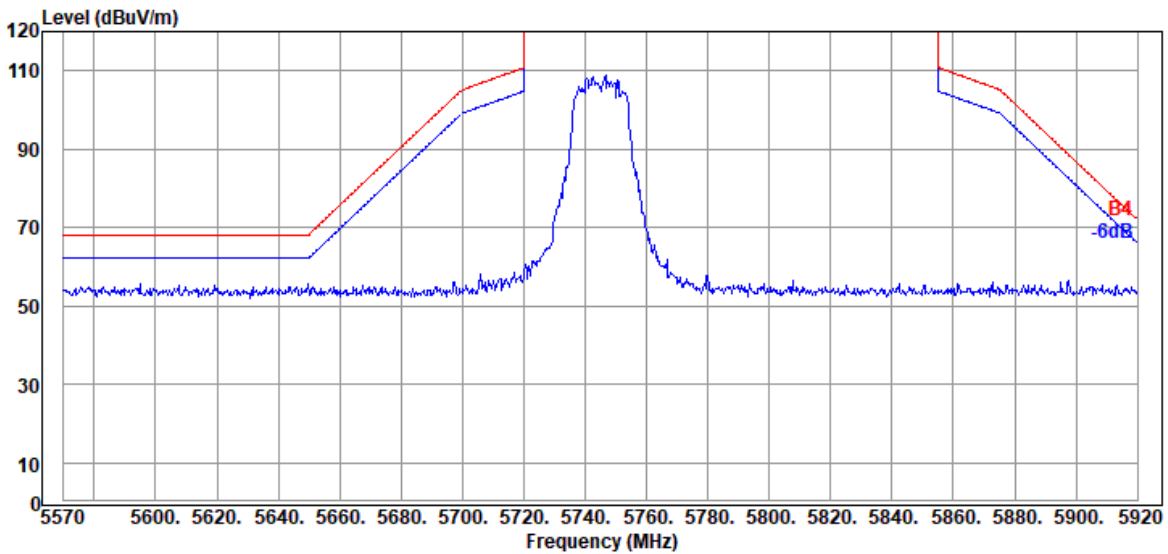


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

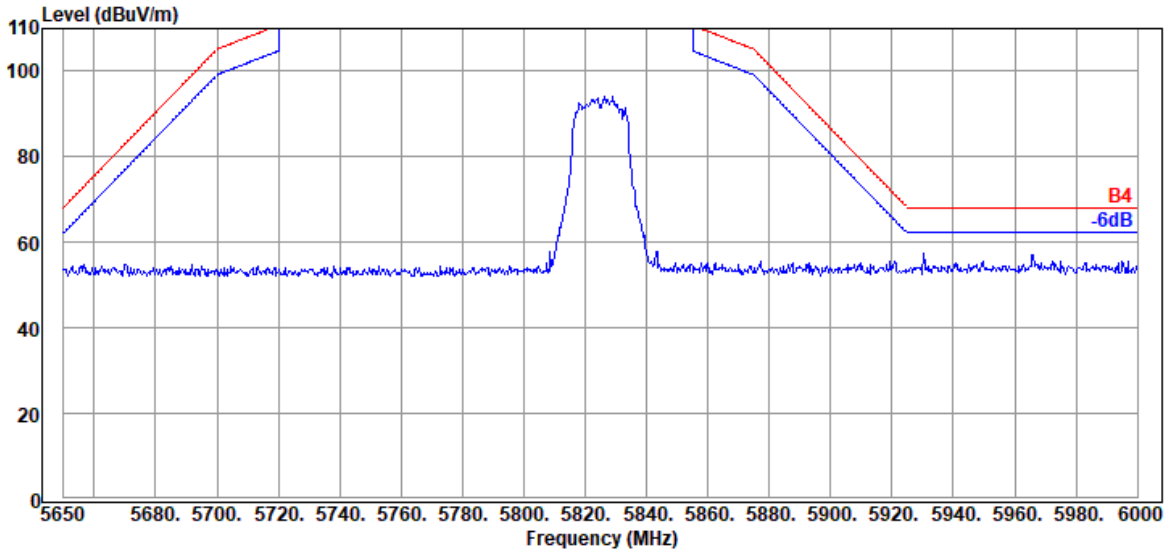

Antenna at Vertical Polarization

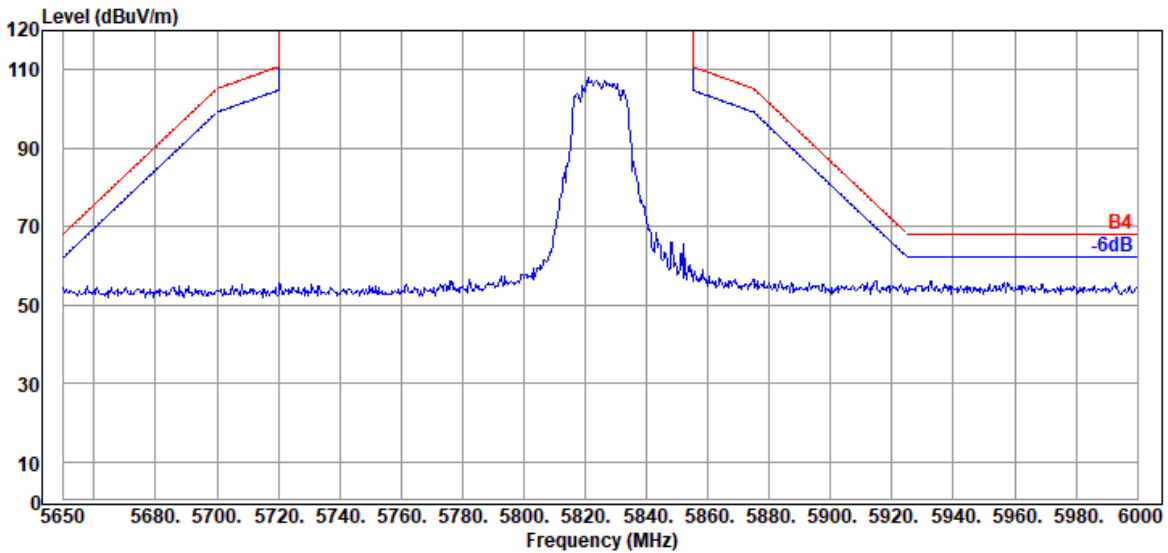


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

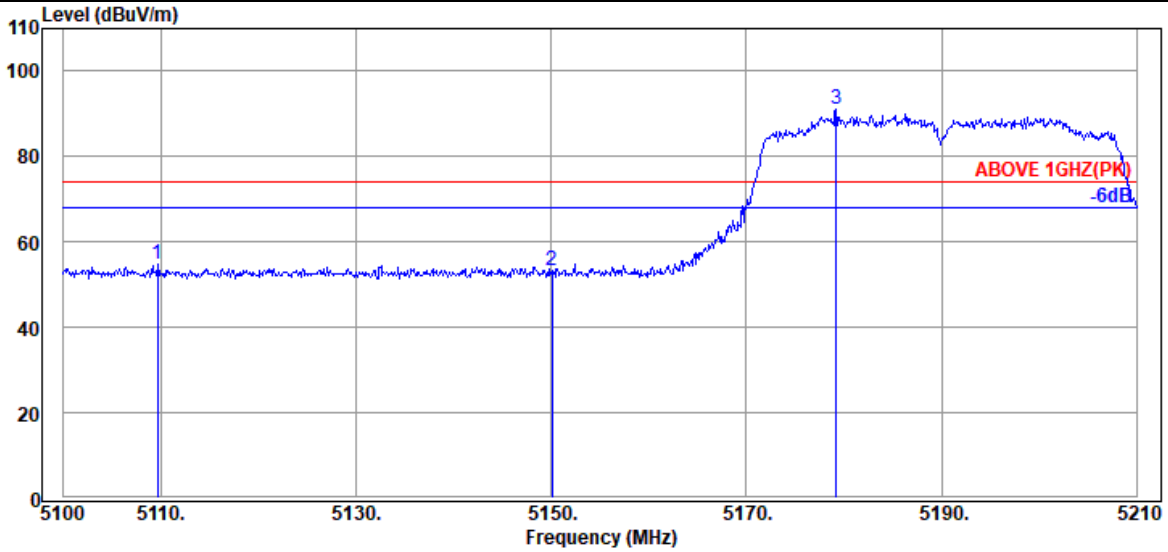

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.680	33.70	8.86	39.29	51.52	54.79	74.00	19.21	Peak
5150.050	33.70	8.88	39.29	50.11	53.40	74.00	20.60	Peak
@ 5179.200	33.70	8.90	39.28	87.73	91.05	---	---	Peak

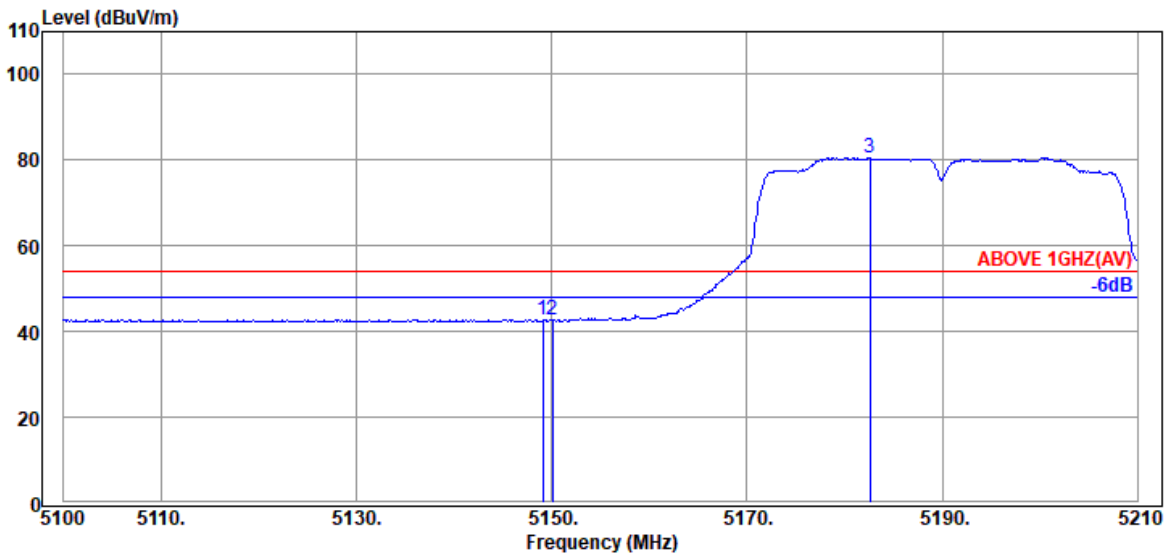


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	33.70	8.88	39.29	39.51	42.80	54.00	11.20	Average
5150.050	33.70	8.88	39.29	39.33	42.62	54.00	11.38	Average
@ 5182.610	33.70	8.90	39.28	77.18	80.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

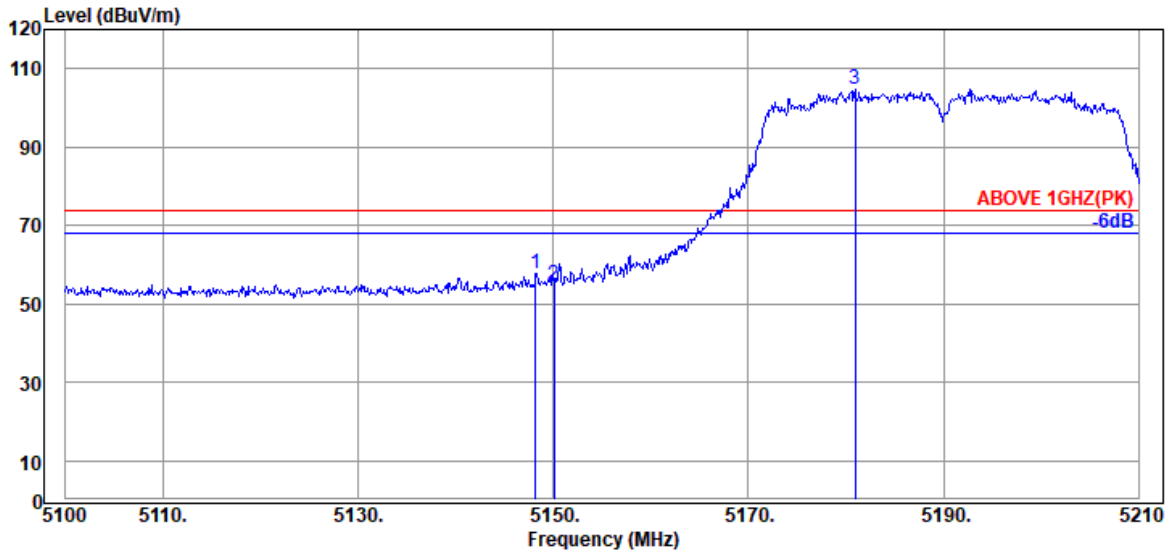

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.180	33.70	8.88	39.29	54.62	57.91	74.00	16.09	Peak
5150.050	33.70	8.88	39.29	51.48	54.77	74.00	19.23	Peak
@ 5180.960	33.70	8.90	39.28	101.34	104.66	---	---	Peak

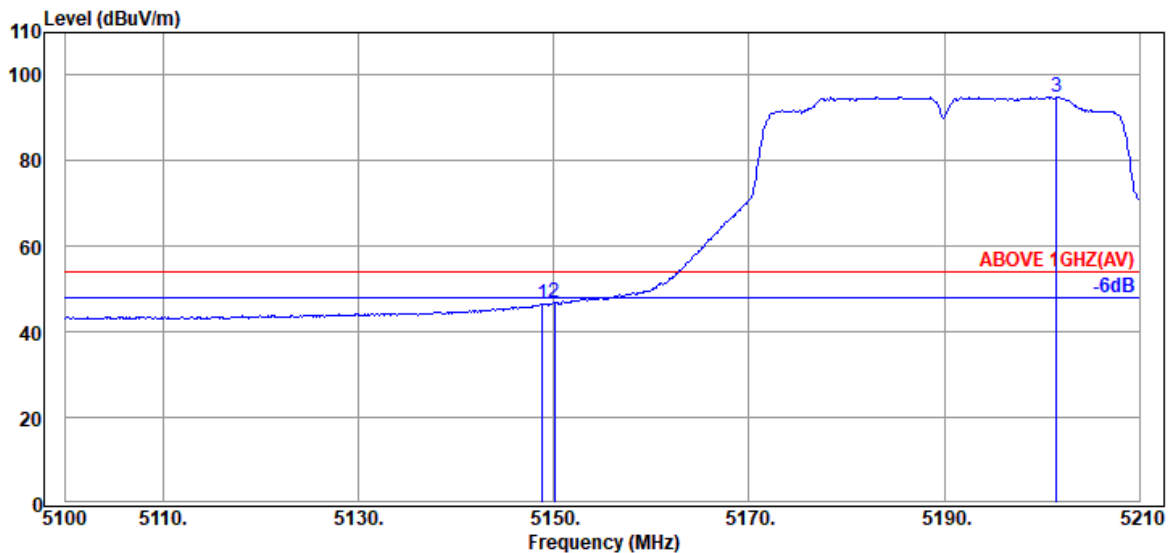


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.840	33.70	8.88	39.29	43.33	46.62	54.00	7.38	Average
5150.050	33.70	8.88	39.29	43.43	46.72	54.00	7.28	Average
@ 5201.530	33.70	8.91	39.28	91.63	94.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

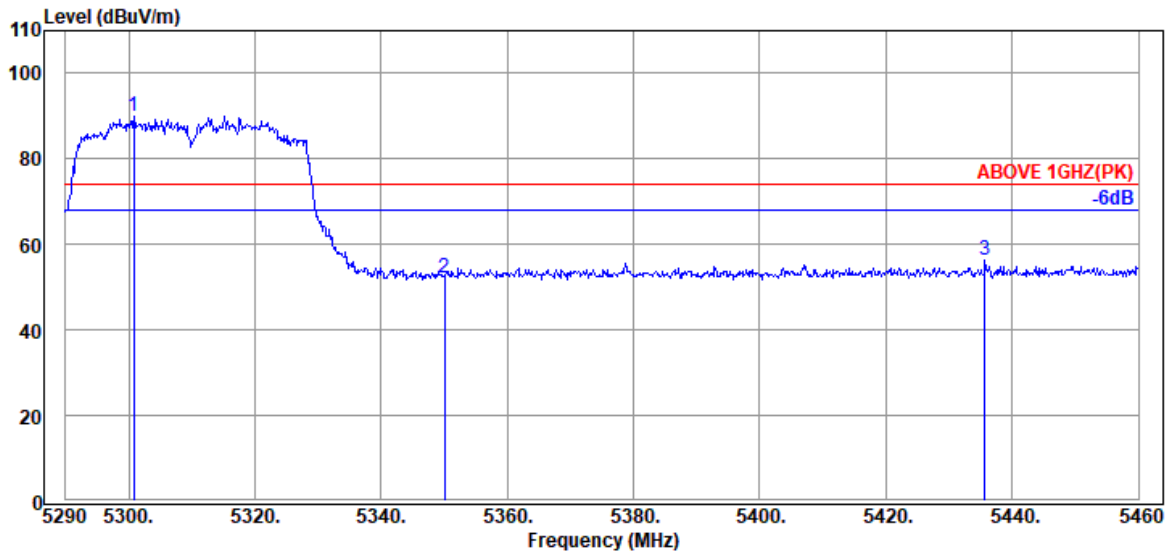

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.880	34.10	8.97	39.28	86.34	90.13	---	---	Peak
5350.010	33.90	8.99	39.27	48.67	52.29	74.00	21.71	Peak
5435.690	34.17	9.04	39.26	52.44	56.39	74.00	17.61	Peak

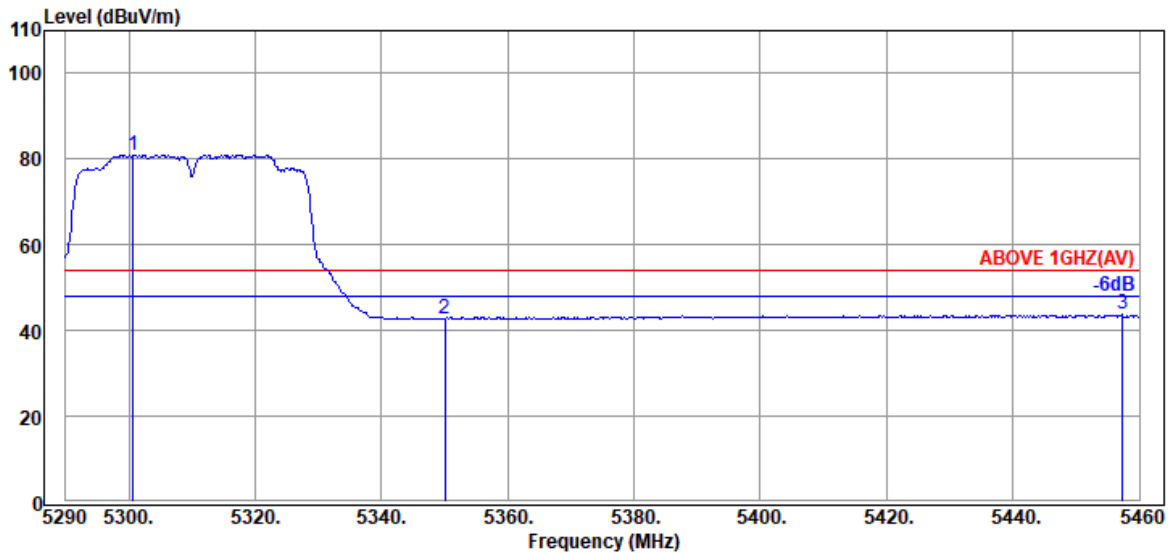


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.710	34.10	8.97	39.28	77.15	80.94	---	---	Average
5350.010	33.90	8.99	39.27	39.18	42.80	54.00	11.20	Average
5457.280	34.20	9.05	39.26	39.71	43.70	54.00	10.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

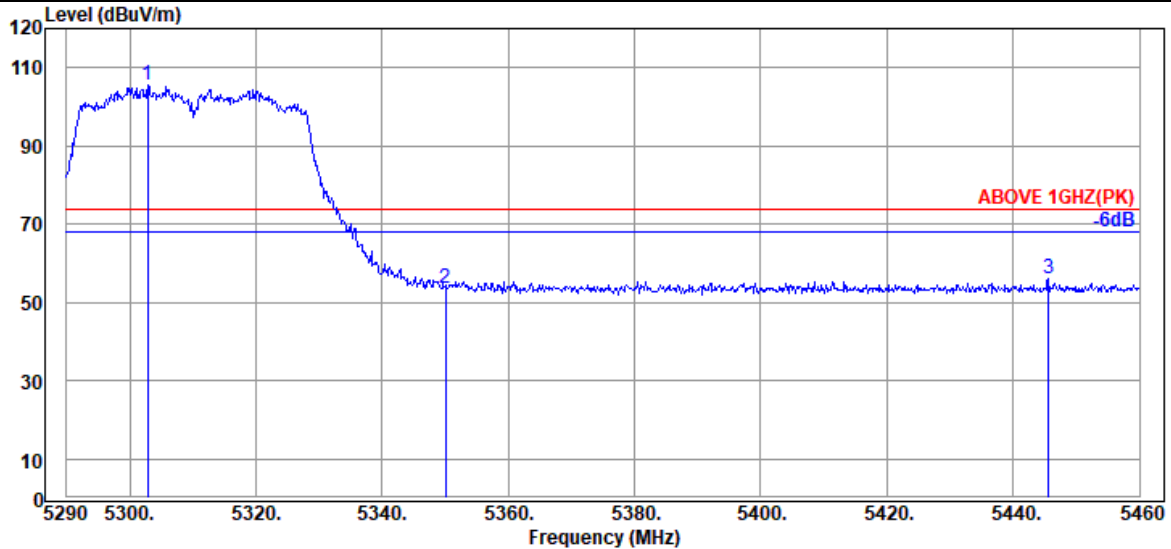

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.920	34.10	8.97	39.28	101.71	105.50	---	---	Peak
5350.010	33.90	8.99	39.27	50.15	53.77	74.00	20.23	Peak
5445.550	34.17	9.04	39.26	52.27	56.22	74.00	17.78	Peak

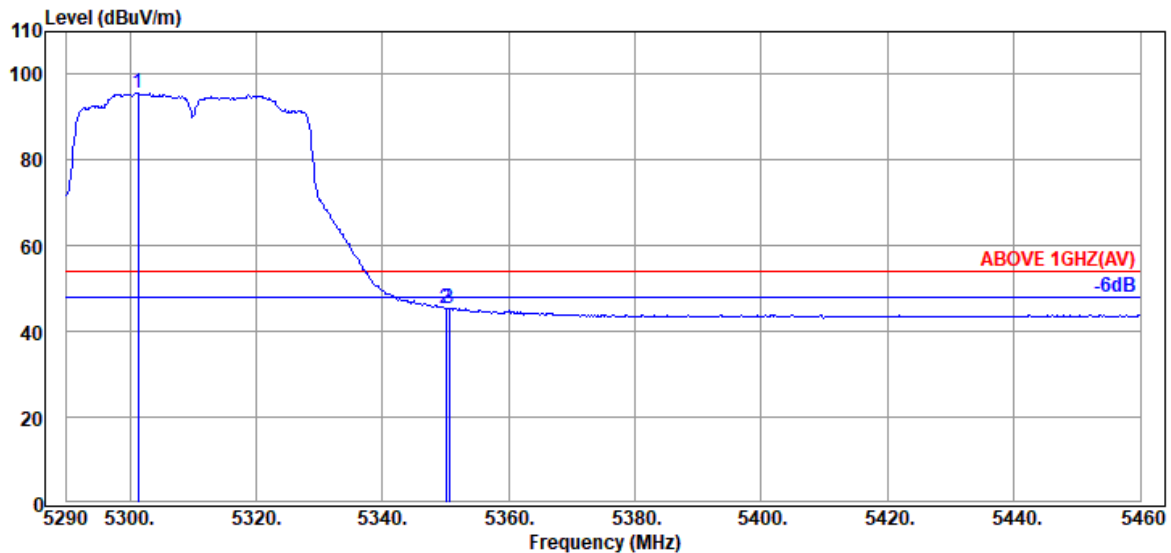


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.390	34.10	8.97	39.28	91.85	95.64	---	---	Average
5350.010	33.90	8.99	39.27	41.79	45.41	54.00	8.59	Average
5350.520	33.90	8.99	39.27	41.87	45.49	54.00	8.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

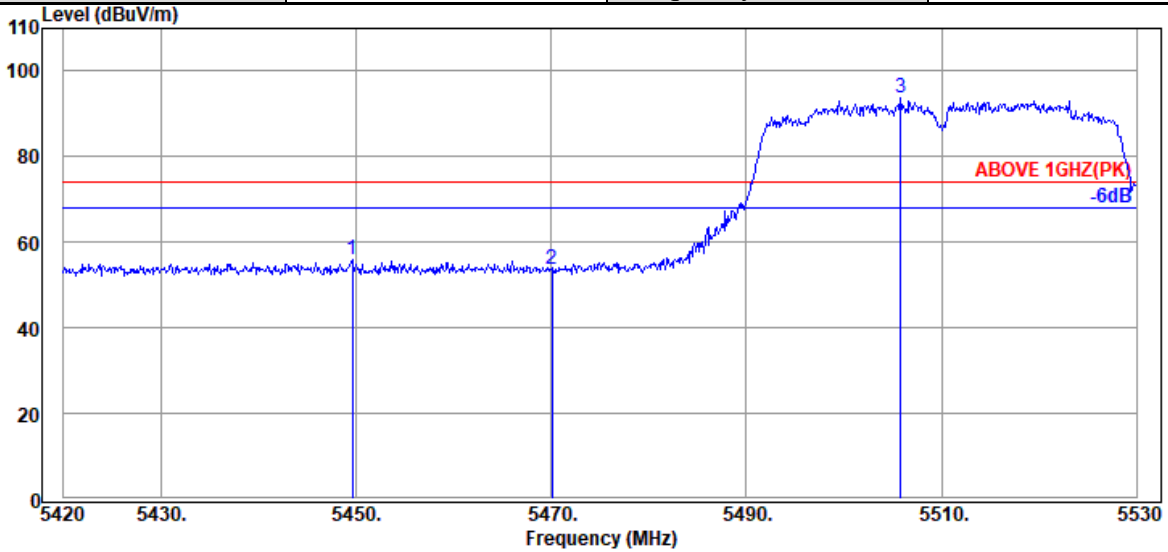

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.590	34.20	9.05	39.26	52.12	56.11	74.00	17.89	Peak
5470.050	34.17	9.06	39.26	49.69	53.66	74.00	20.34	Peak
@ 5505.800	34.10	9.08	39.26	89.64	93.56	---	---	Peak

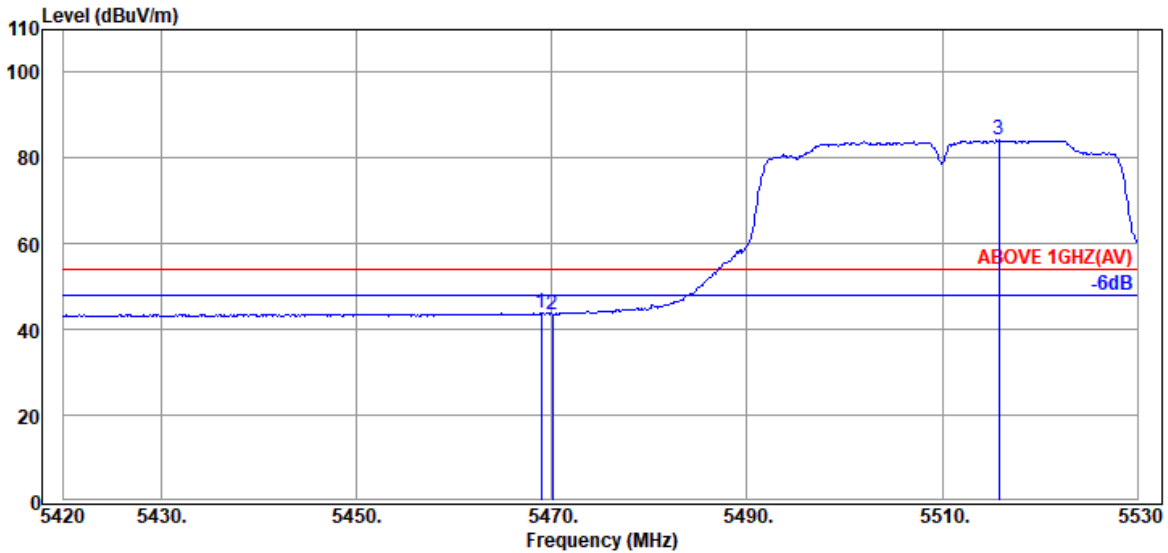


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.17	9.06	39.26	39.82	43.79	54.00	10.21	Average
5470.050	34.17	9.06	39.26	39.65	43.62	54.00	10.38	Average
@ 5515.810	34.10	9.09	39.26	80.25	84.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

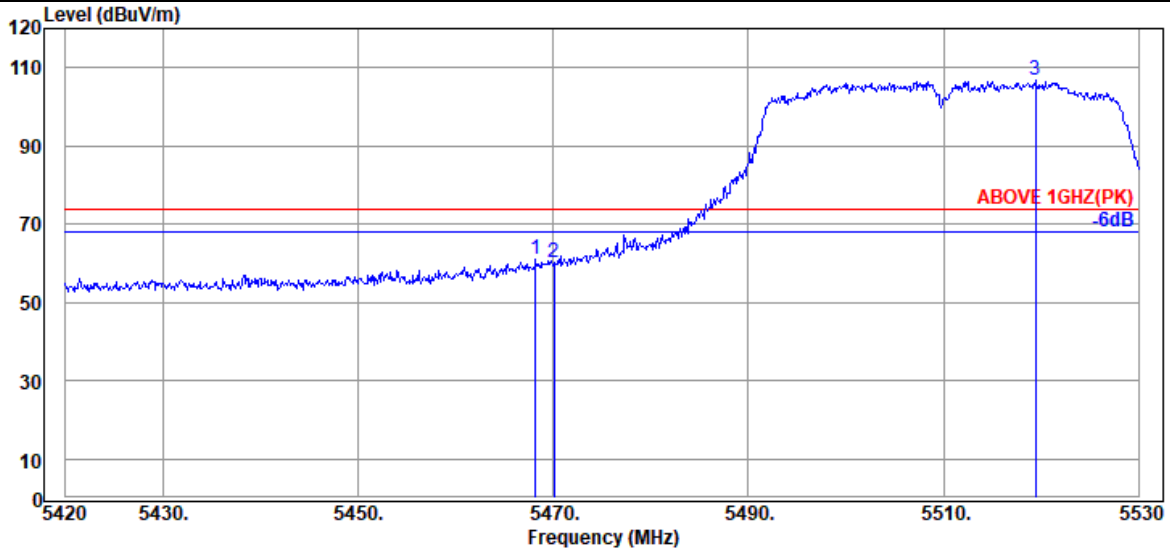

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.180	34.17	9.06	39.26	57.09	61.06	74.00	12.94	Peak
5470.050	34.17	9.06	39.26	56.10	60.07	74.00	13.93	Peak
@ 5519.440	34.10	9.09	39.26	102.68	106.61	---	---	Peak

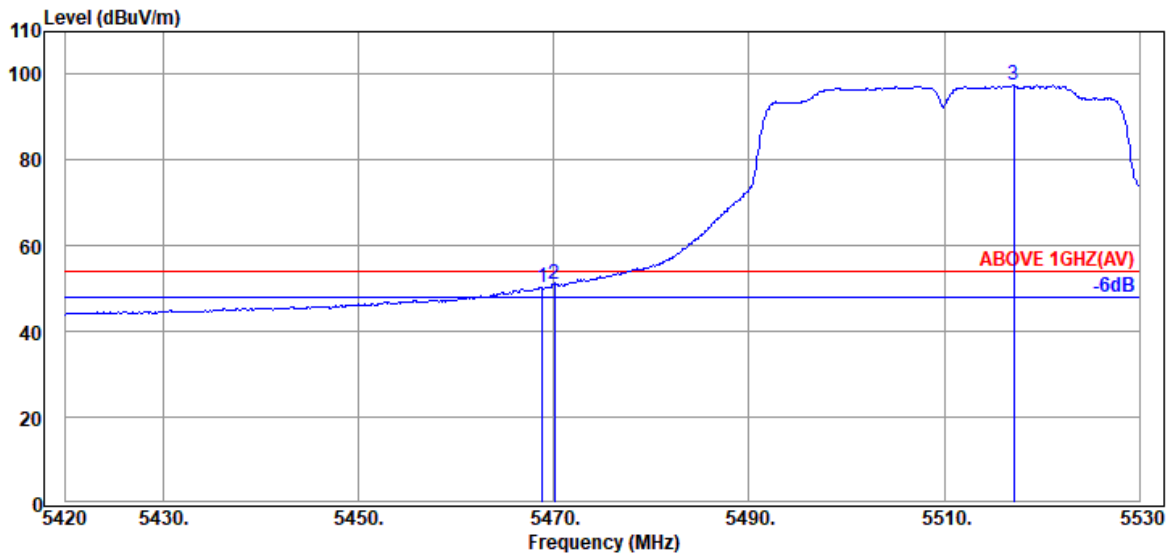


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.17	9.06	39.26	46.29	50.26	54.00	3.74	Average
5470.050	34.17	9.06	39.26	47.16	51.13	54.00	2.87	Average
@ 5517.130	34.10	9.09	39.26	93.60	97.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

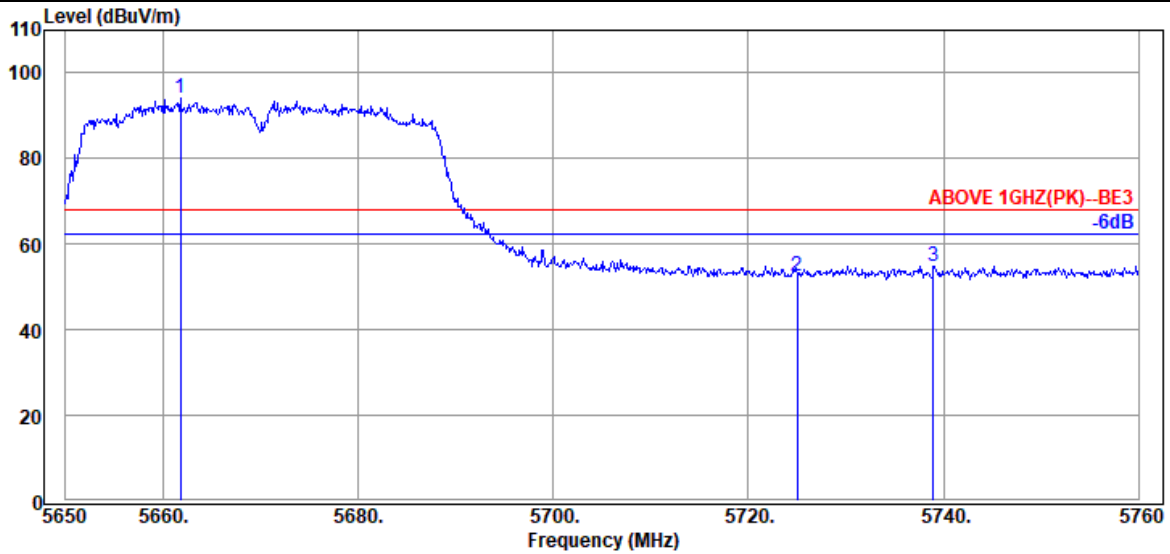

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.770	33.93	9.16	39.29	90.39	94.19	---	---	Peak
5725.020	33.80	9.20	39.30	48.69	52.39	68.20	15.81	Peak
5738.990	33.80	9.20	39.31	51.17	54.86	68.20	13.34	Peak

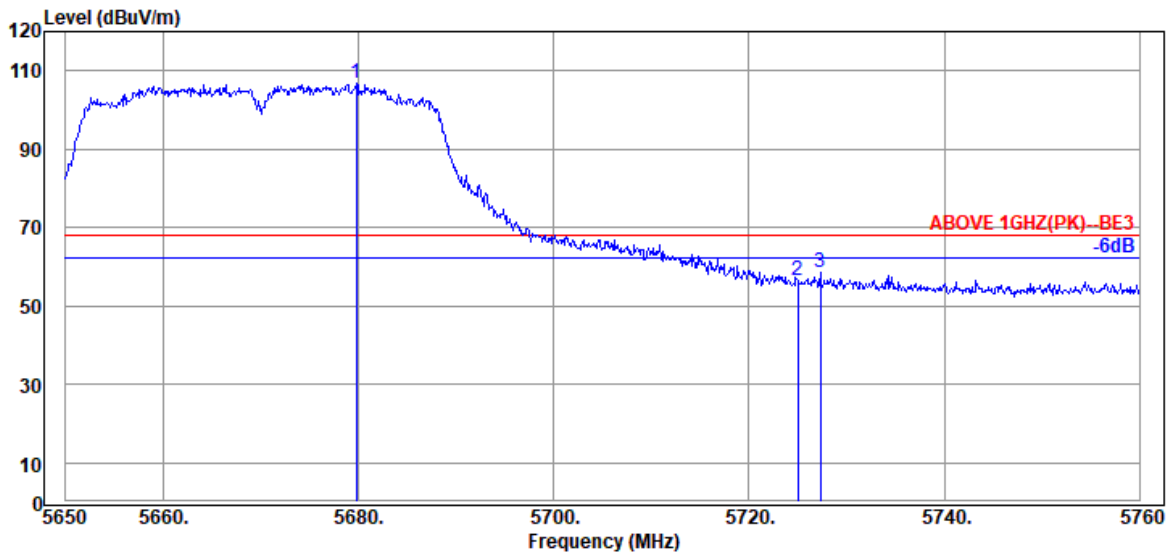


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.810	33.87	9.17	39.30	102.89	106.63	---	---	Peak
5725.020	33.80	9.20	39.30	52.67	56.37	68.20	11.83	Peak
5727.330	33.80	9.20	39.31	54.70	58.39	68.20	9.81	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

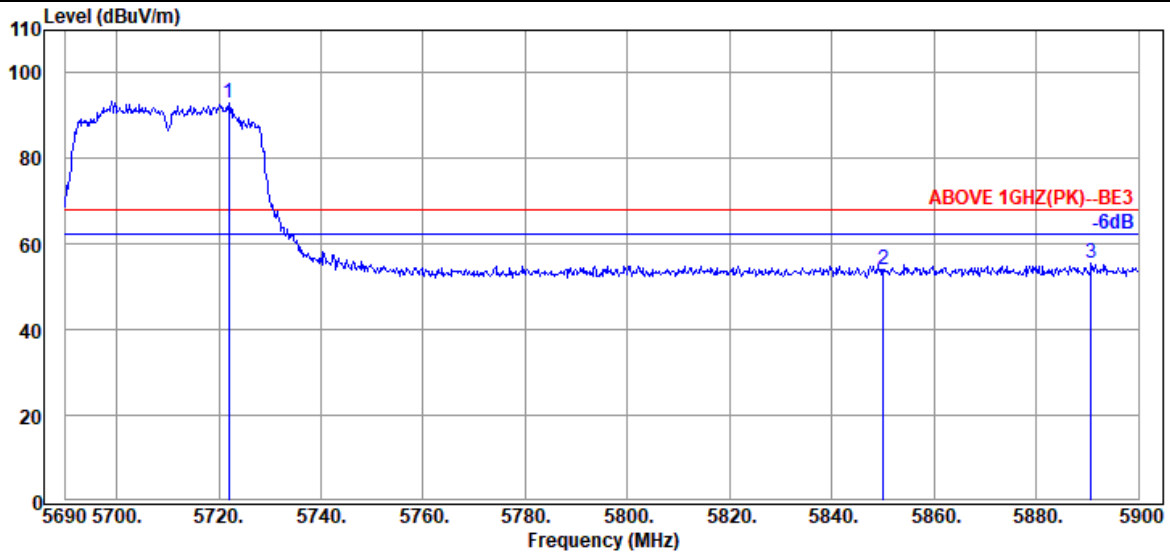

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.920	33.80	9.19	39.30	89.33	93.02	---	---	Peak
5850.020	34.10	9.25	39.33	49.90	53.92	68.20	14.28	Peak
5890.760	34.10	9.28	39.34	51.71	55.75	68.20	12.45	Peak

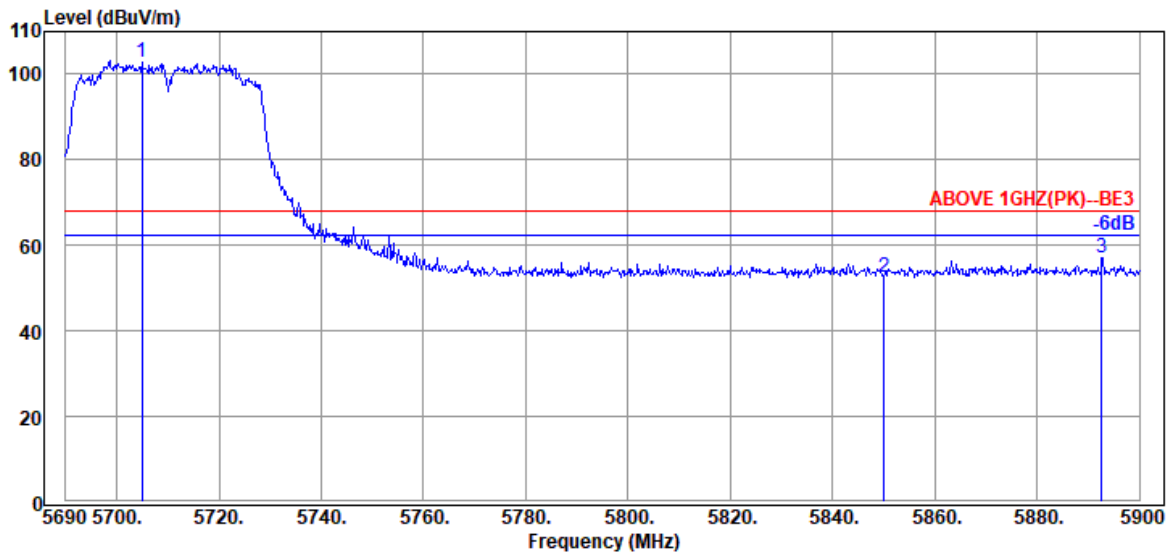


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.910	33.80	9.18	39.30	99.22	102.90	---	---	Peak
5850.020	34.10	9.25	39.33	48.70	52.72	68.20	15.48	Peak
5892.650	34.10	9.28	39.34	53.06	57.10	68.20	11.10	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

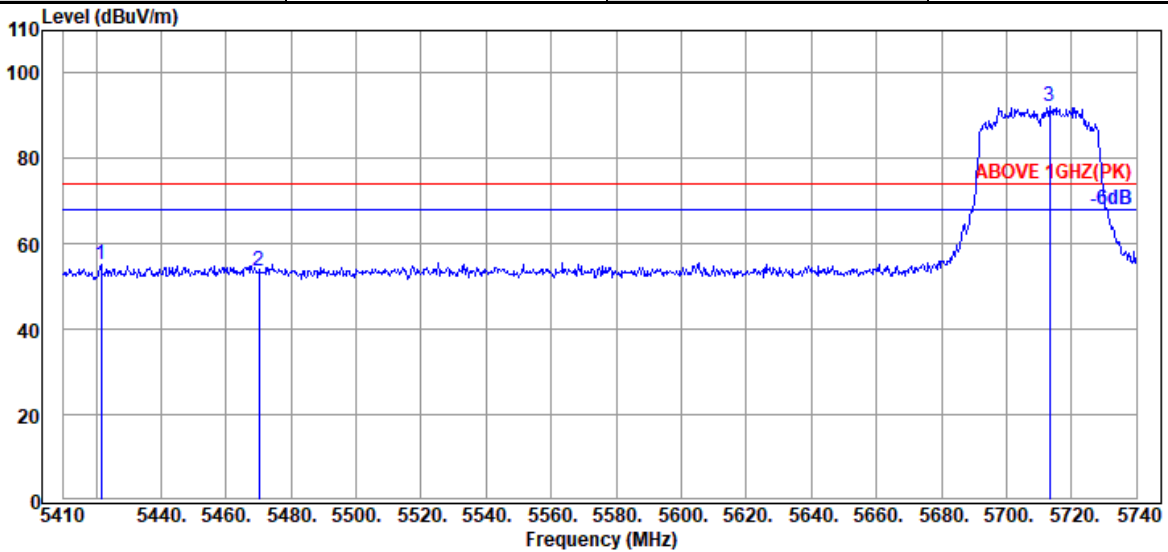

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.550	34.15	9.04	39.27	51.37	55.29	74.00	18.71	Peak
5470.060	34.17	9.06	39.26	49.66	53.63	74.00	20.37	Peak
@ 5713.270	33.80	9.19	39.30	88.46	92.15	---	---	Peak

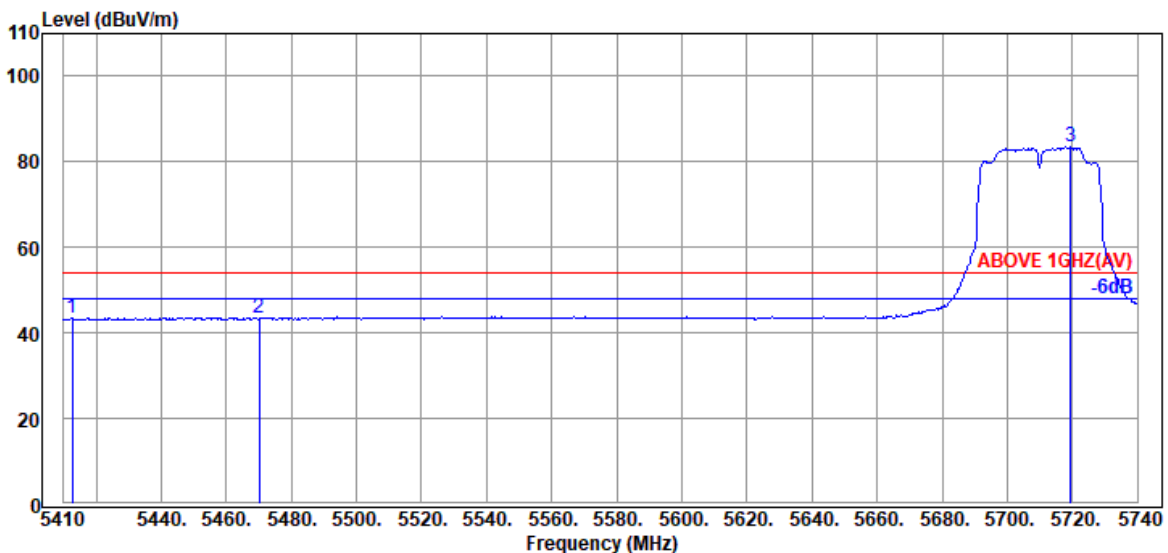


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.640	34.12	9.03	39.27	39.68	43.56	54.00	10.44	Average
5470.060	34.17	9.06	39.26	39.31	43.28	54.00	10.72	Average
@ 5719.540	33.80	9.19	39.30	79.78	83.47	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

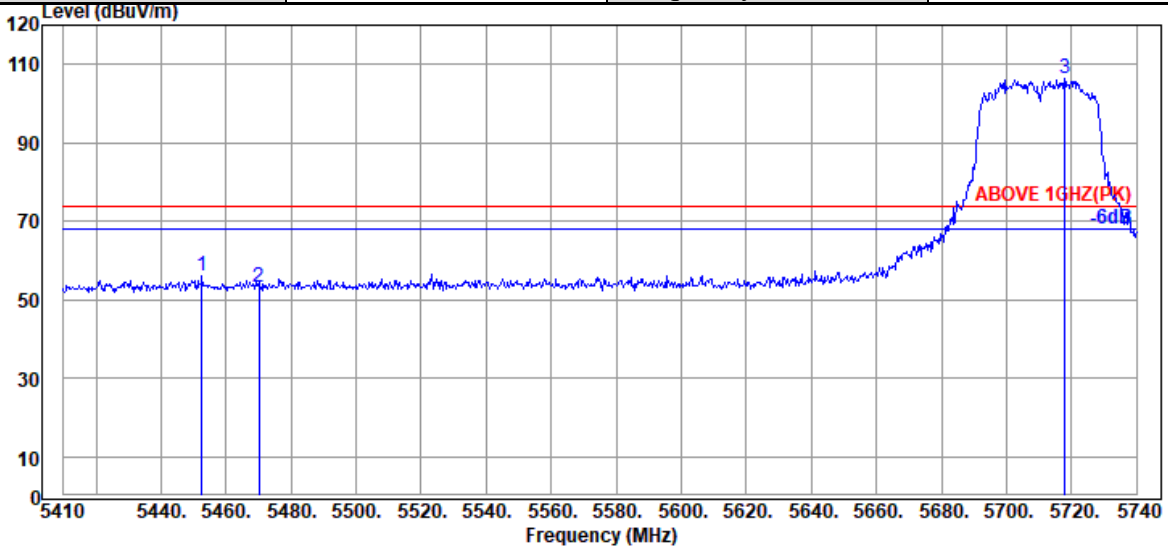

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.570	34.20	9.05	39.26	52.03	56.02	74.00	17.98	Peak
5470.060	34.17	9.06	39.26	49.29	53.26	74.00	20.74	Peak
@ 5717.890	33.80	9.19	39.30	102.82	106.51	---	---	Peak

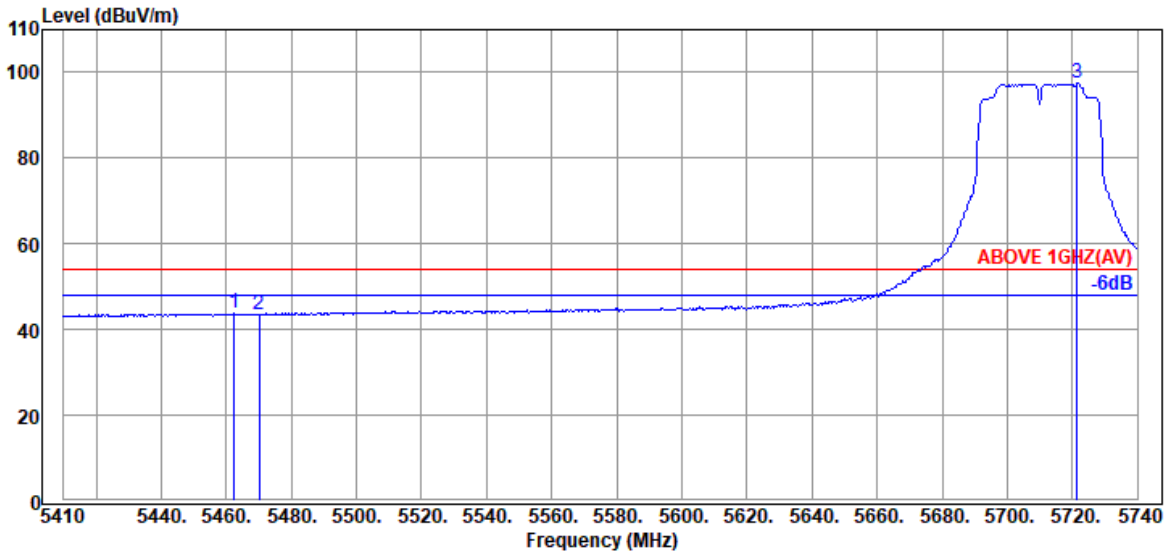


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.470	34.20	9.05	39.26	39.70	43.69	54.00	10.31	Average
5470.060	34.17	9.06	39.26	39.63	43.60	54.00	10.40	Average
@ 5721.520	33.80	9.19	39.30	93.91	97.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

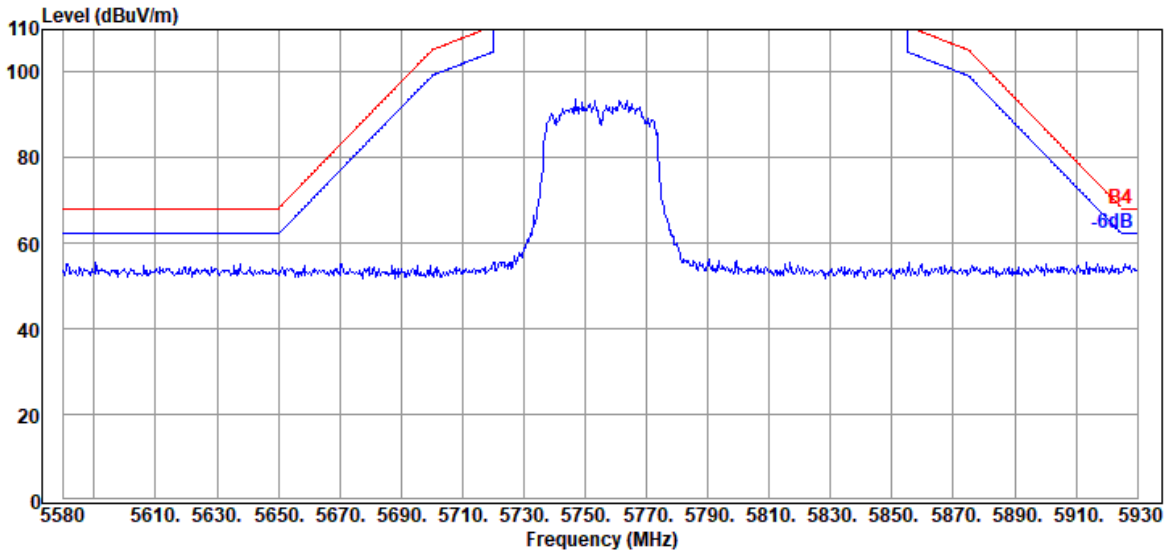


Antenna at Vertical Polarization

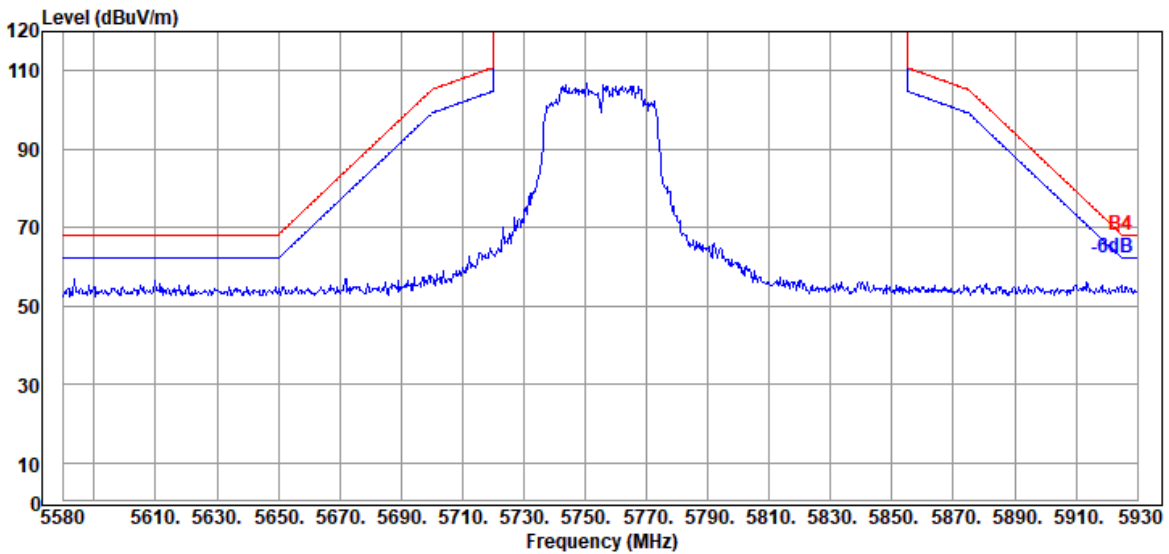


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

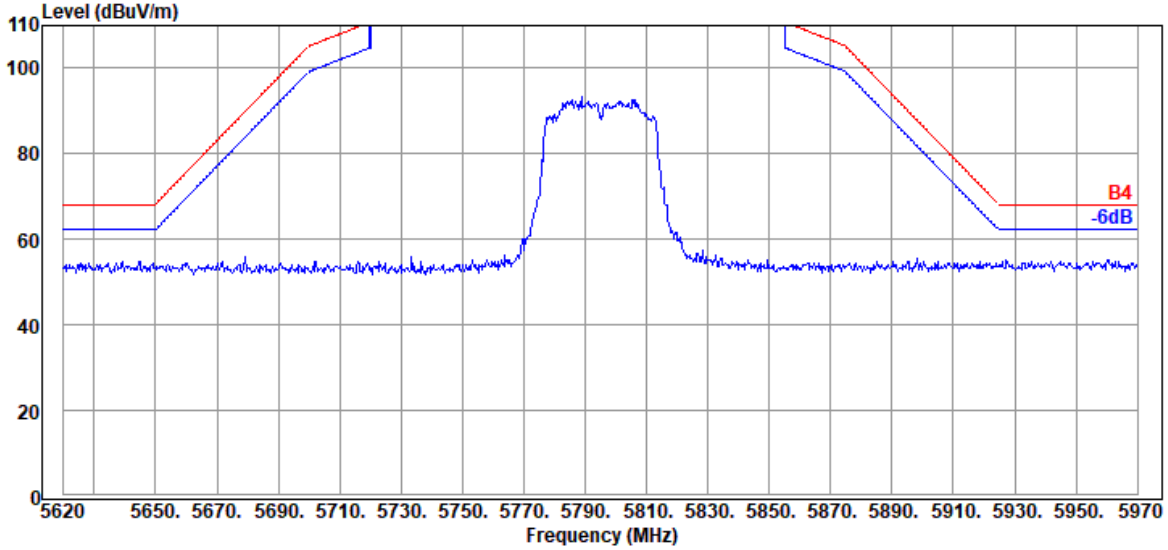

Antenna at Vertical Polarization

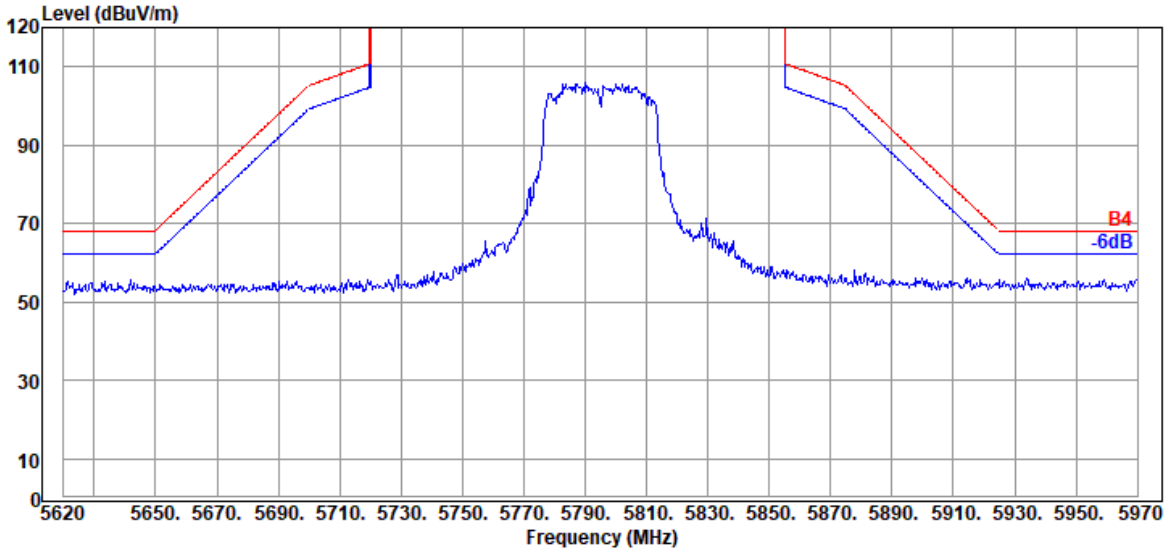


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

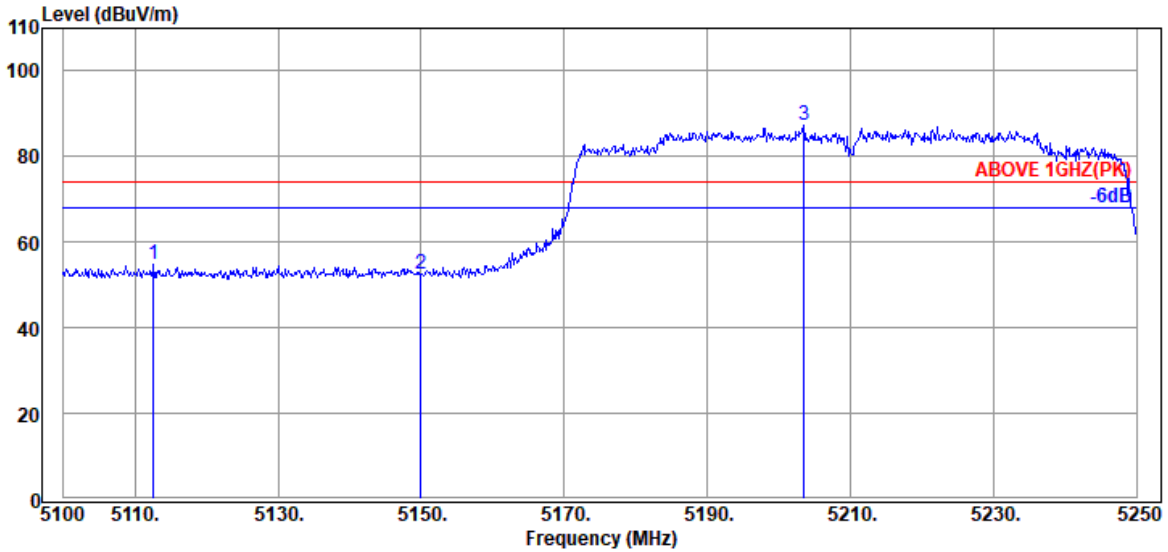

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5112.600	33.70	8.87	39.29	51.46	54.74	74.00	19.26	Peak
5149.950	33.70	8.88	39.29	49.07	52.36	74.00	21.64	Peak
@ 5203.500	33.72	8.92	39.28	83.91	87.27	---	---	Peak

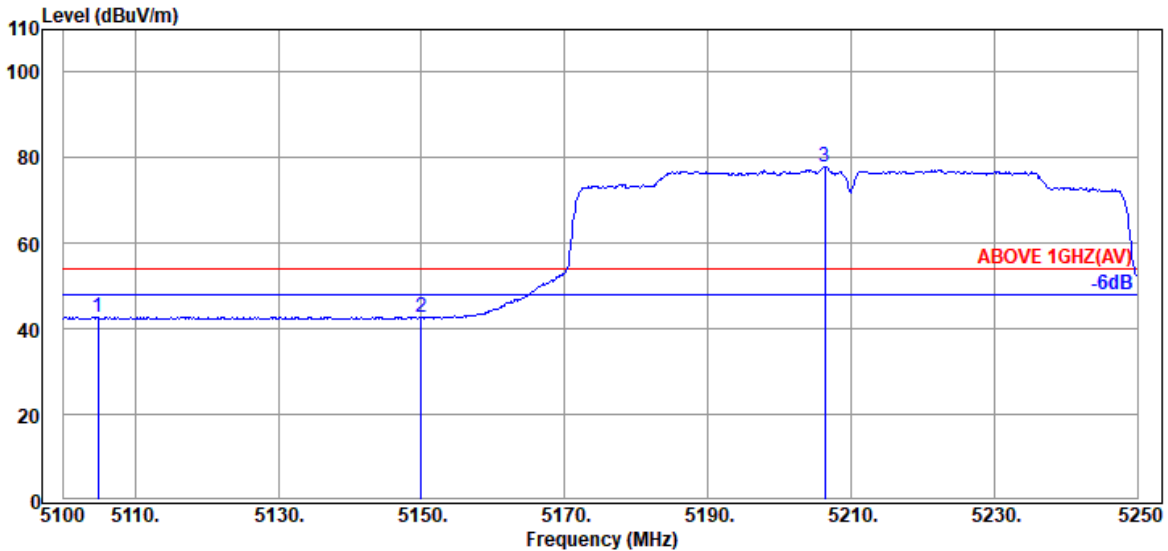


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5104.800	33.70	8.86	39.29	39.61	42.88	54.00	11.12	Average
5149.950	33.70	8.88	39.29	39.35	42.64	54.00	11.36	Average
@ 5206.350	33.72	8.92	39.28	74.41	77.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

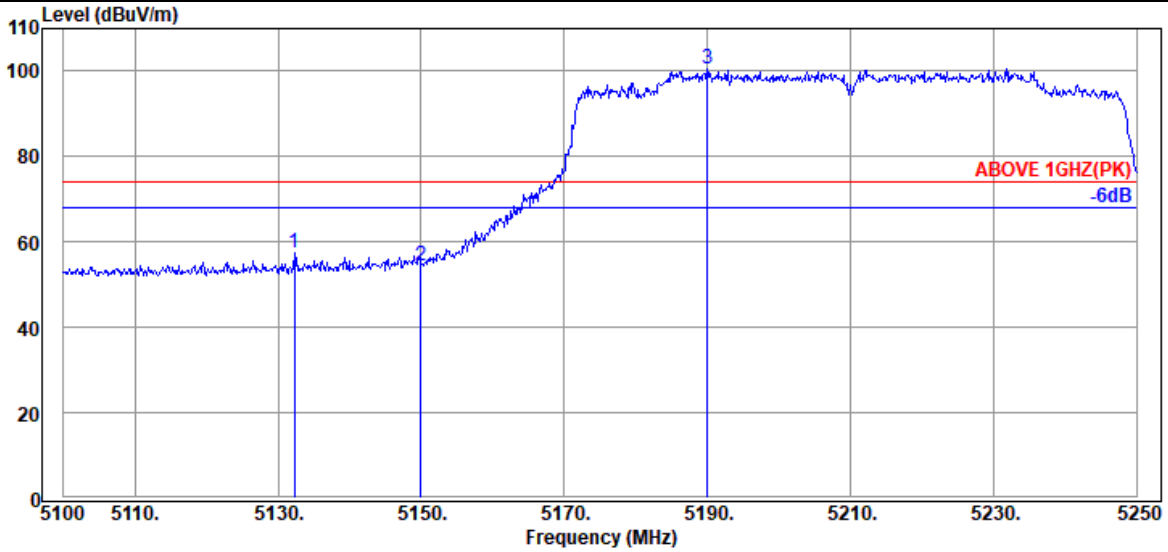

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.250	33.70	8.88	39.29	54.23	57.52	74.00	16.48	Peak
5149.950	33.70	8.88	39.29	51.23	54.52	74.00	19.48	Peak
@ 5190.000	33.70	8.91	39.28	97.28	100.61	---	---	Peak

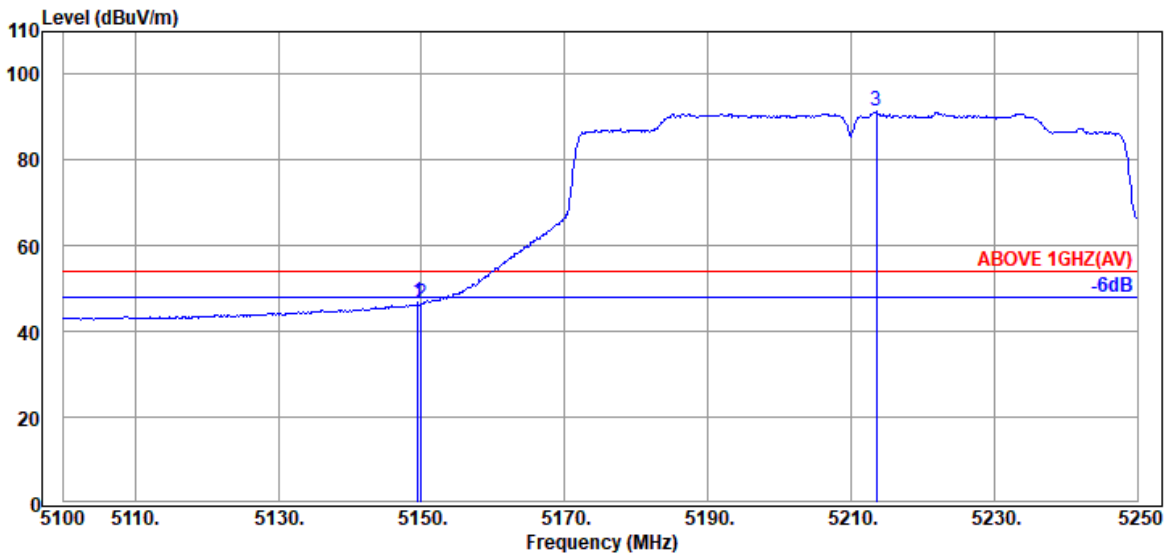


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.88	39.29	43.41	46.70	54.00	7.30	Average
5149.950	33.70	8.88	39.29	43.25	46.54	54.00	7.46	Average
@ 5213.550	33.72	8.92	39.28	87.95	91.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

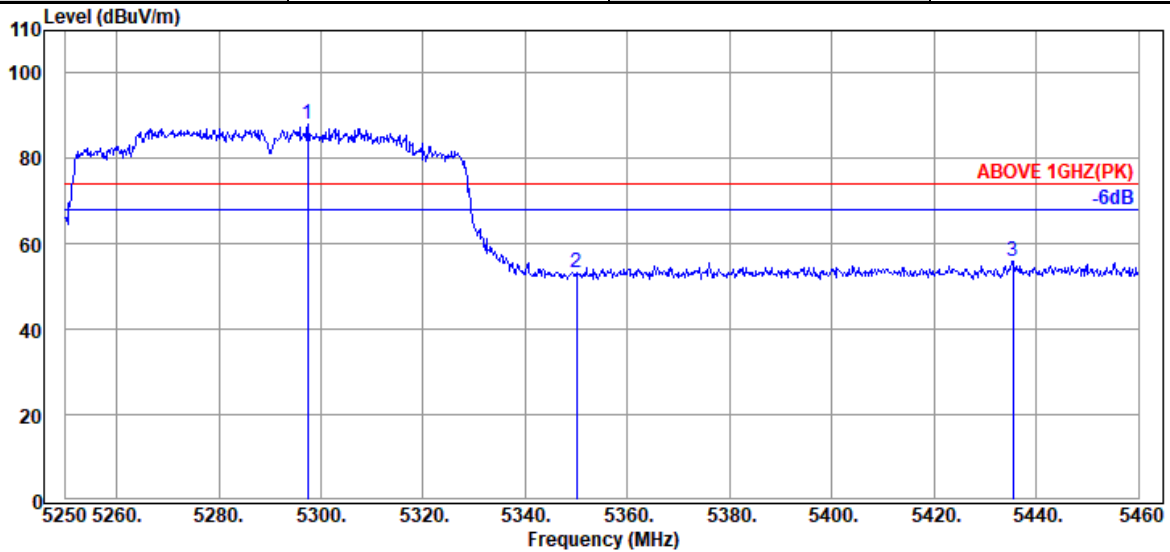

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.460	34.10	8.97	39.28	84.42	88.21	---	---	Peak
5349.960	33.90	8.99	39.27	49.65	53.27	74.00	20.73	Peak
5435.430	34.17	9.04	39.26	52.07	56.02	74.00	17.98	Peak

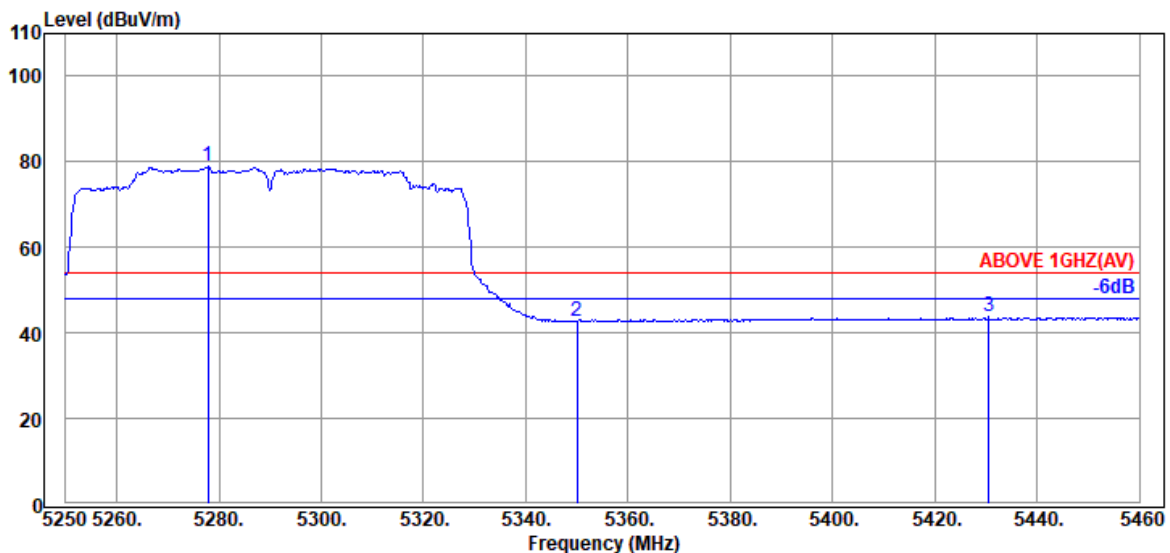


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.930	34.00	8.96	39.28	75.17	78.85	---	---	Average
5349.960	33.90	8.99	39.27	39.17	42.79	54.00	11.21	Average
5430.600	34.15	9.04	39.27	39.77	43.69	54.00	10.31	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

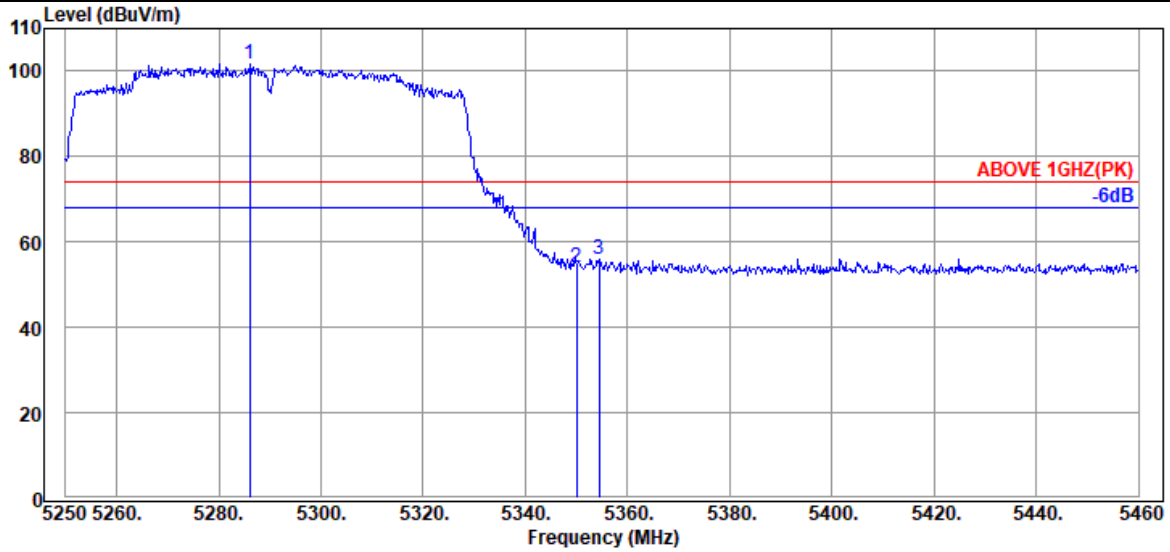

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.120	34.00	8.96	39.28	98.18	101.86	---	---	Peak
5349.960	33.90	8.99	39.27	50.37	53.99	74.00	20.01	Peak
5354.370	33.97	9.00	39.27	52.34	56.04	74.00	17.96	Peak

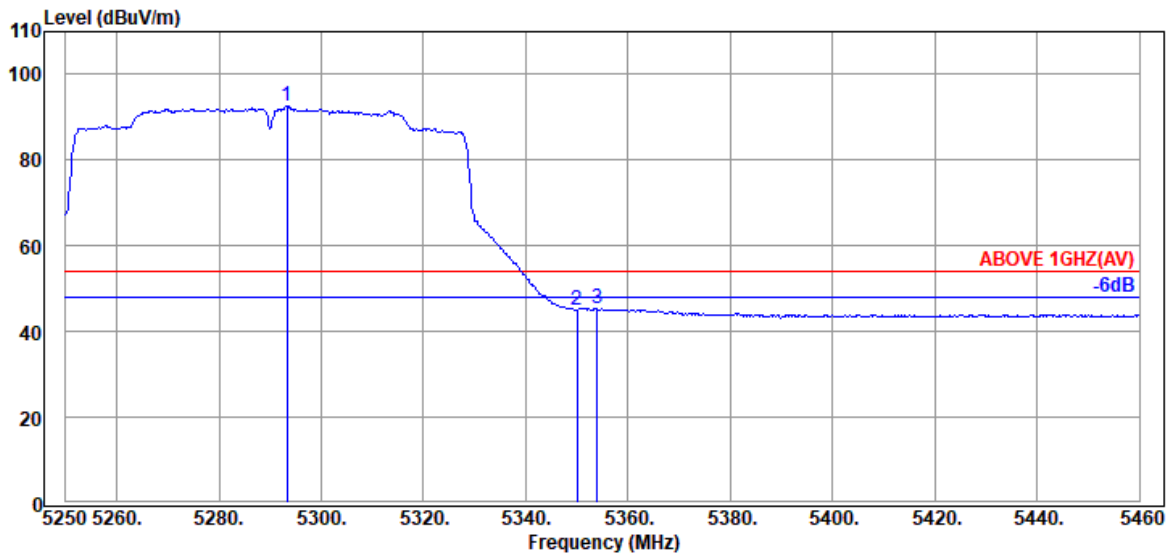


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.260	34.10	8.97	39.28	88.81	92.60	---	---	Average
5349.960	33.90	8.99	39.27	41.37	44.99	54.00	9.01	Average
5353.950	33.90	8.99	39.27	41.74	45.36	54.00	8.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

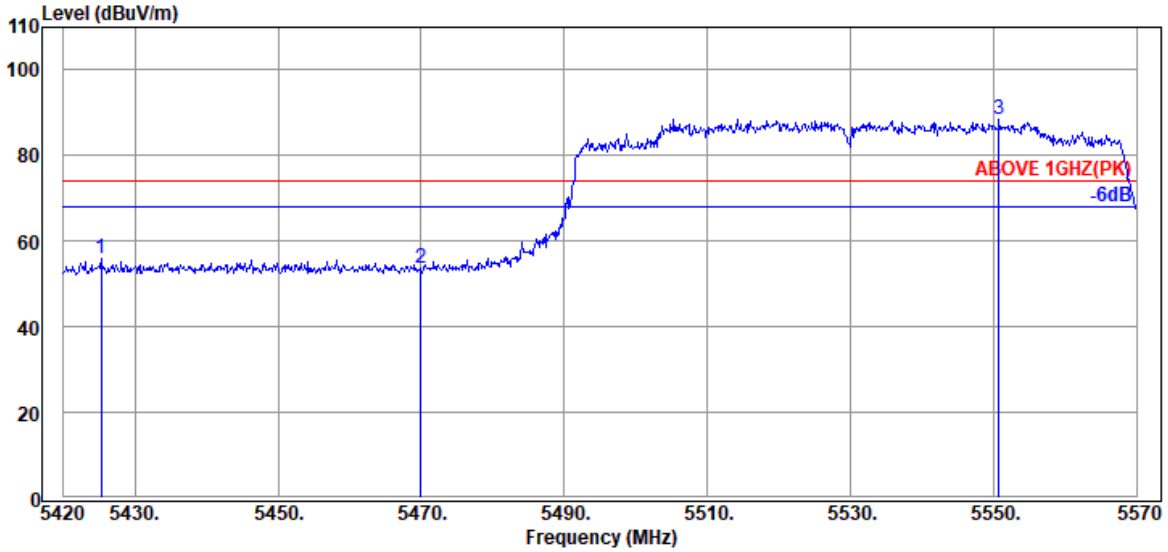

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.250	34.15	9.04	39.27	51.97	55.89	74.00	18.11	Peak
5469.950	34.17	9.06	39.26	49.67	53.64	74.00	20.36	Peak
@ 5550.800	34.10	9.10	39.27	84.56	88.49	---	---	Peak

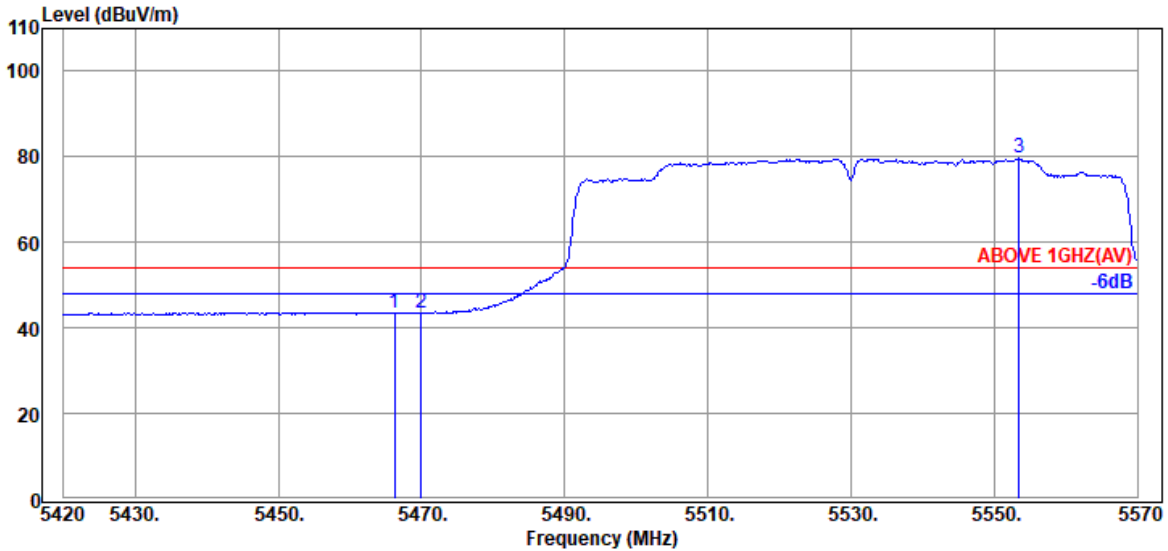


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	9.06	39.26	39.68	43.65	54.00	10.35	Average
5469.950	34.17	9.06	39.26	39.59	43.56	54.00	10.44	Average
@ 5553.500	34.10	9.10	39.27	75.88	79.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

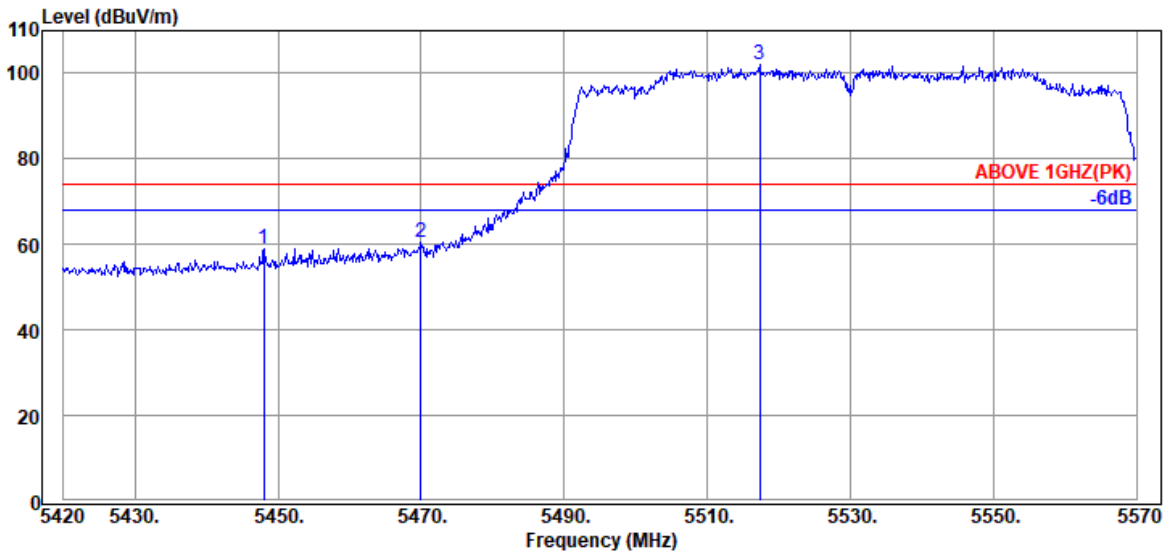

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.050	34.20	9.05	39.26	55.09	59.08	74.00	14.92	Peak
5469.950	34.17	9.06	39.26	56.54	60.51	74.00	13.49	Peak
@ 5517.350	34.10	9.09	39.26	98.03	101.96	---	---	Peak

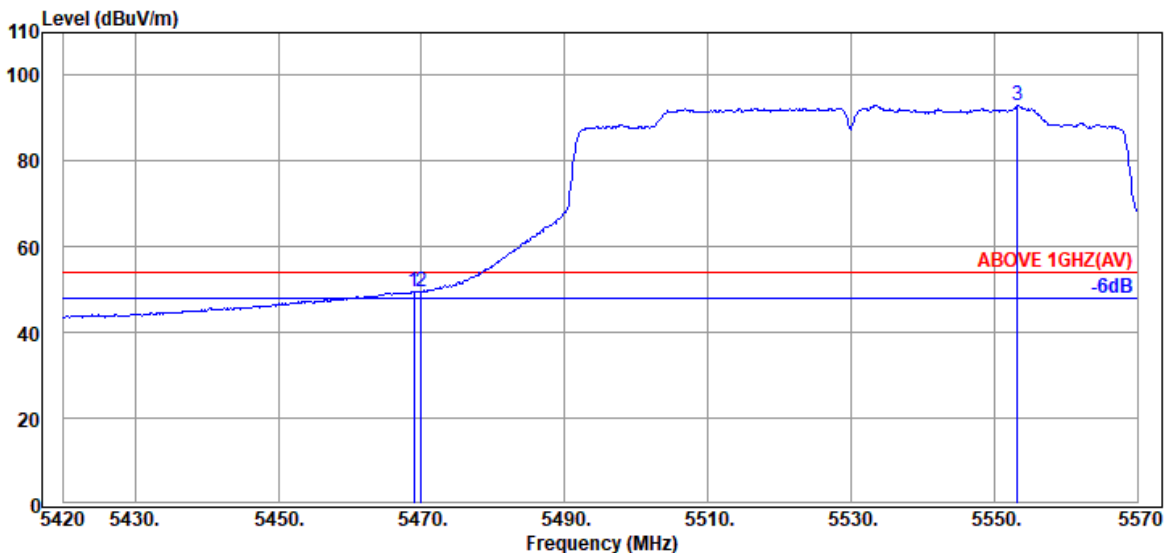


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.17	9.06	39.26	45.56	49.53	54.00	4.47	Average
5469.950	34.17	9.06	39.26	45.66	49.63	54.00	4.37	Average
@ 5553.200	34.10	9.10	39.27	89.08	93.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

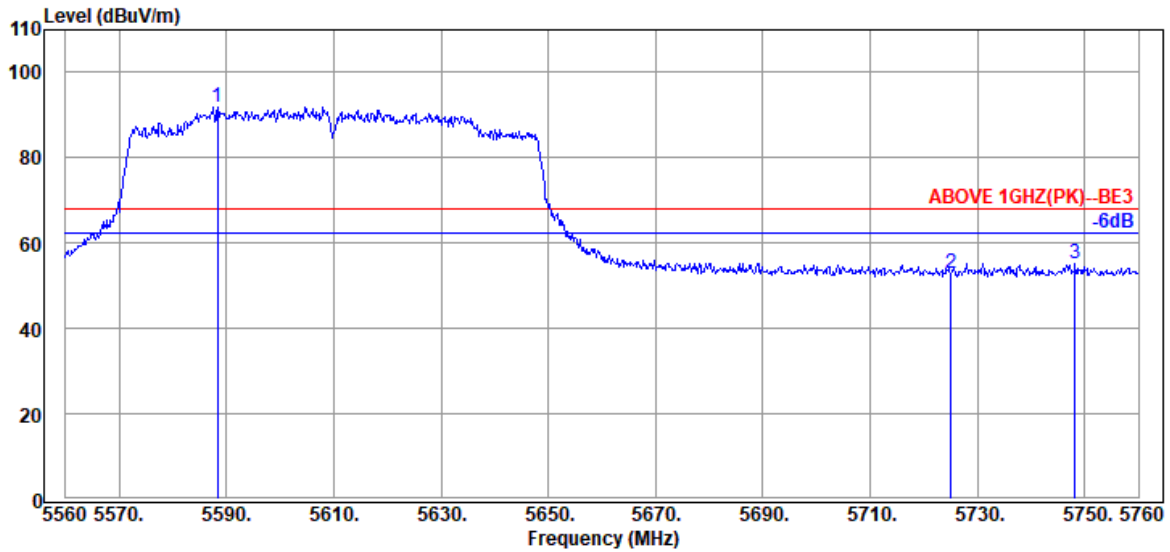

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5588.400	34.03	9.12	39.28	88.12	91.99	---	---	Peak
5725.000	33.80	9.20	39.30	49.37	53.07	68.20	15.13	Peak
5748.200	33.80	9.20	39.31	51.64	55.33	68.20	12.87	Peak

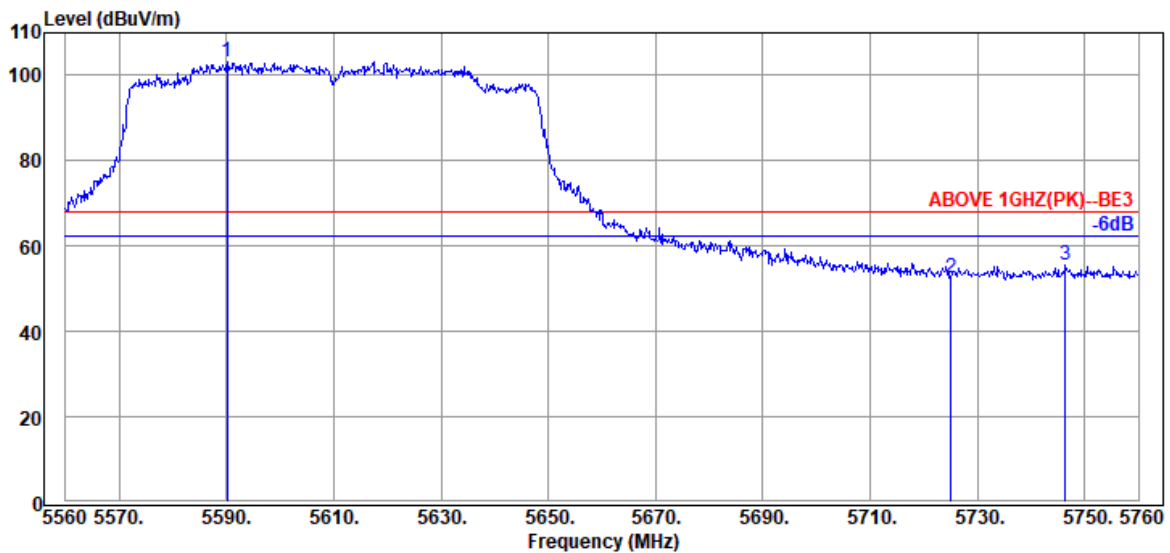


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5590.200	34.03	9.12	39.28	99.36	103.23	---	---	Peak
5725.000	33.80	9.20	39.30	48.78	52.48	68.20	15.72	Peak
5746.400	33.80	9.20	39.31	51.80	55.49	68.20	12.71	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

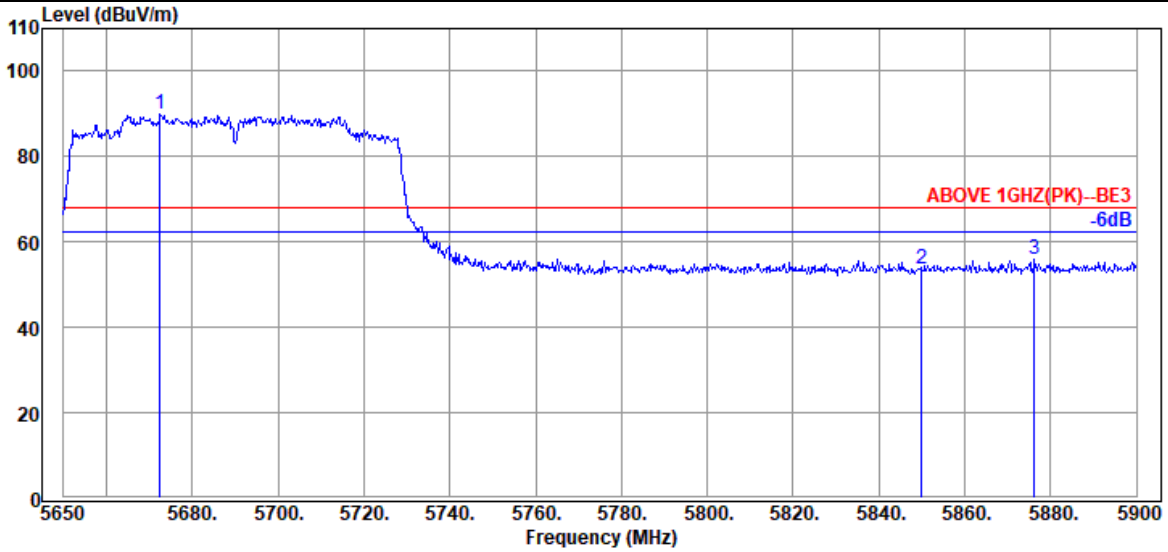

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.500	33.93	9.16	39.30	86.03	89.82	---	---	Peak
5850.000	34.10	9.25	39.33	49.60	53.62	68.20	14.58	Peak
5876.250	34.10	9.27	39.33	51.76	55.80	68.20	12.40	Peak

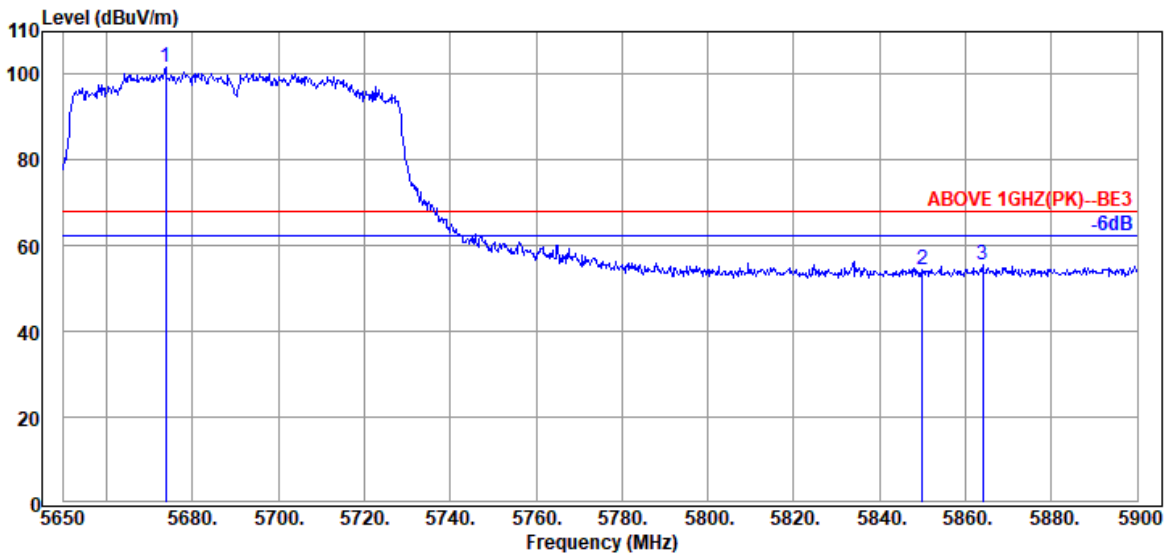


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.750	33.87	9.17	39.30	97.93	101.67	---	---	Peak
5850.000	34.10	9.25	39.33	50.60	54.62	68.20	13.58	Peak
5864.000	34.10	9.26	39.33	51.46	55.49	68.20	12.71	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

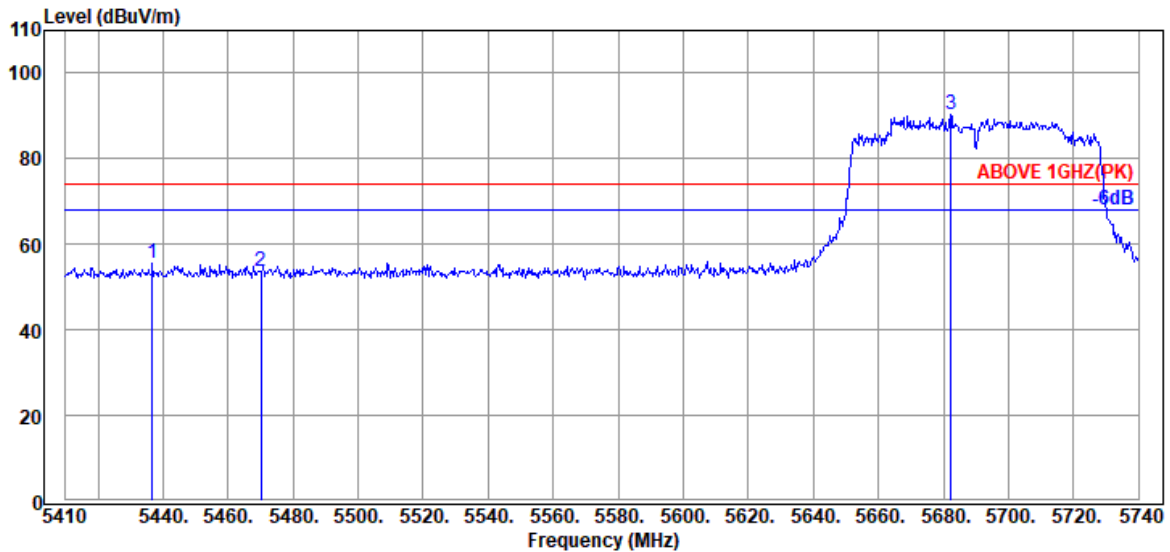

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.730	34.17	9.04	39.26	51.79	55.74	74.00	18.26	Peak
5470.060	34.17	9.06	39.26	49.84	53.81	74.00	20.19	Peak
@ 5682.250	33.87	9.17	39.30	86.44	90.18	---	---	Peak

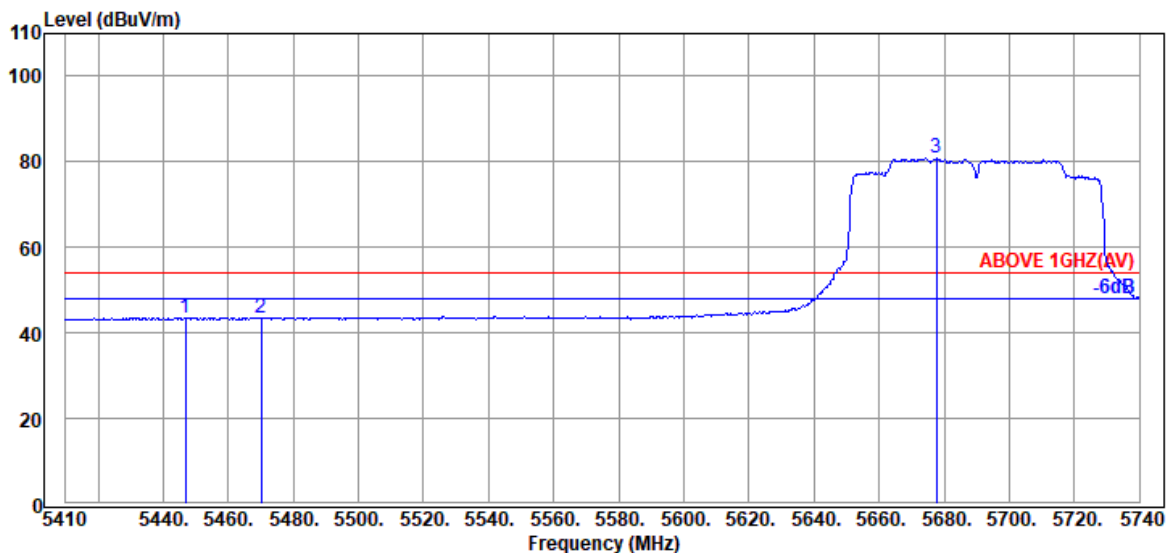


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.960	34.17	9.04	39.26	39.70	43.65	54.00	10.35	Average
5470.060	34.17	9.06	39.26	39.31	43.28	54.00	10.72	Average
@ 5677.630	33.87	9.17	39.30	77.32	81.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

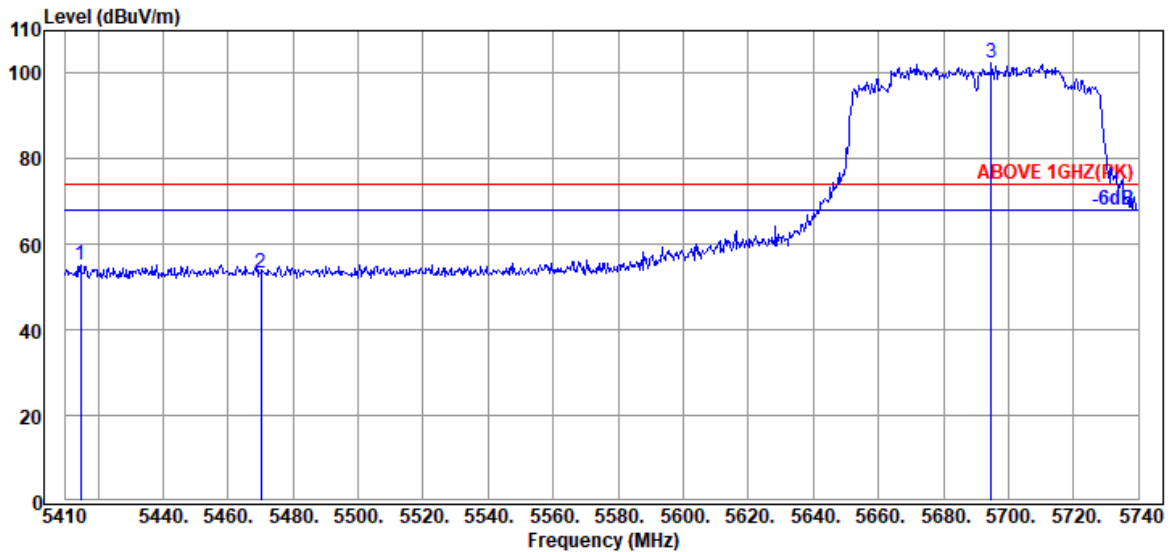

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5414.620	34.12	9.03	39.27	51.18	55.06	74.00	18.94	Peak
5470.060	34.17	9.06	39.26	49.42	53.39	74.00	20.61	Peak
@ 5694.790	33.80	9.18	39.30	98.68	102.36	---	---	Peak

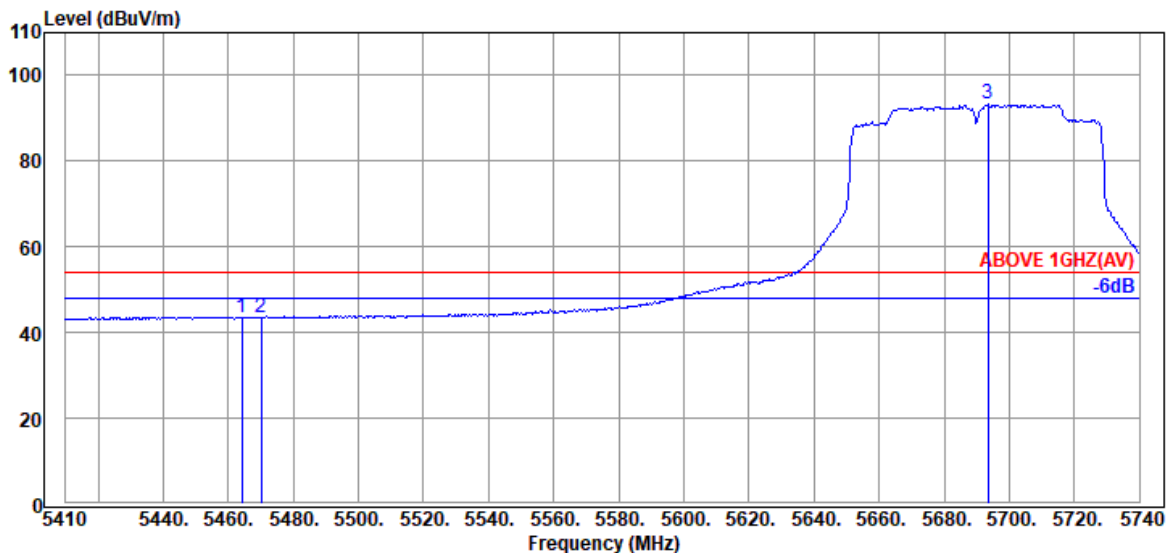


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.120	34.17	9.06	39.26	39.67	43.64	54.00	10.36	Average
5470.060	34.17	9.06	39.26	39.42	43.39	54.00	10.61	Average
@ 5693.470	33.80	9.18	39.30	89.50	93.18	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

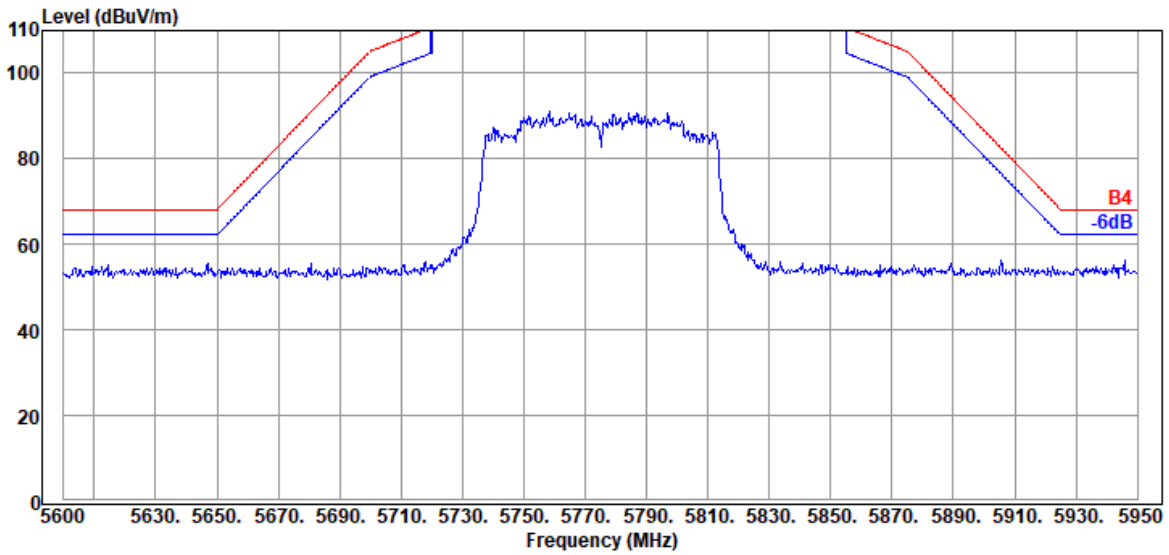

Antenna at Vertical Polarization

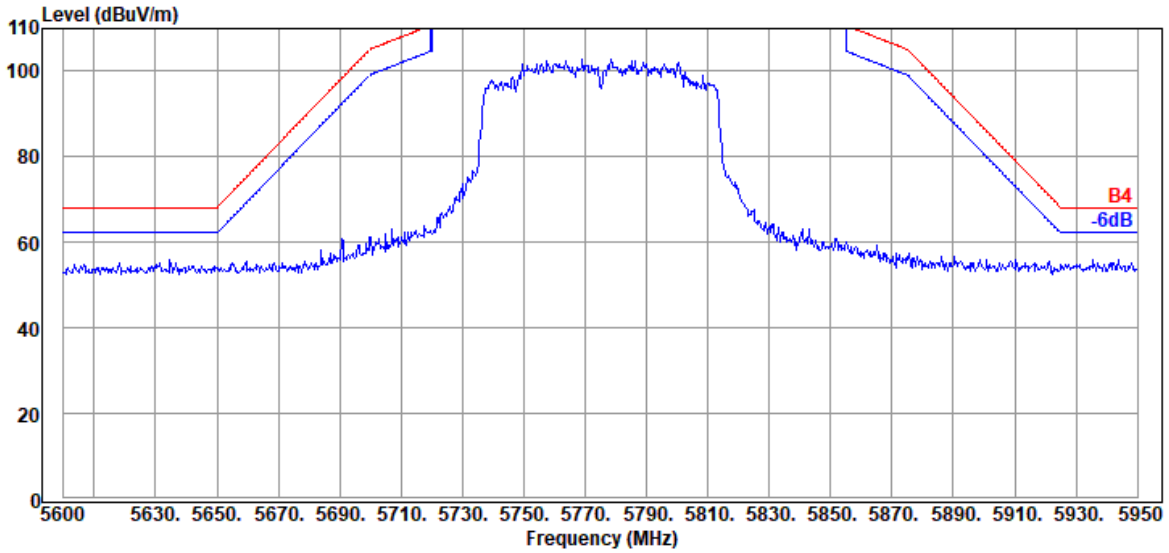


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

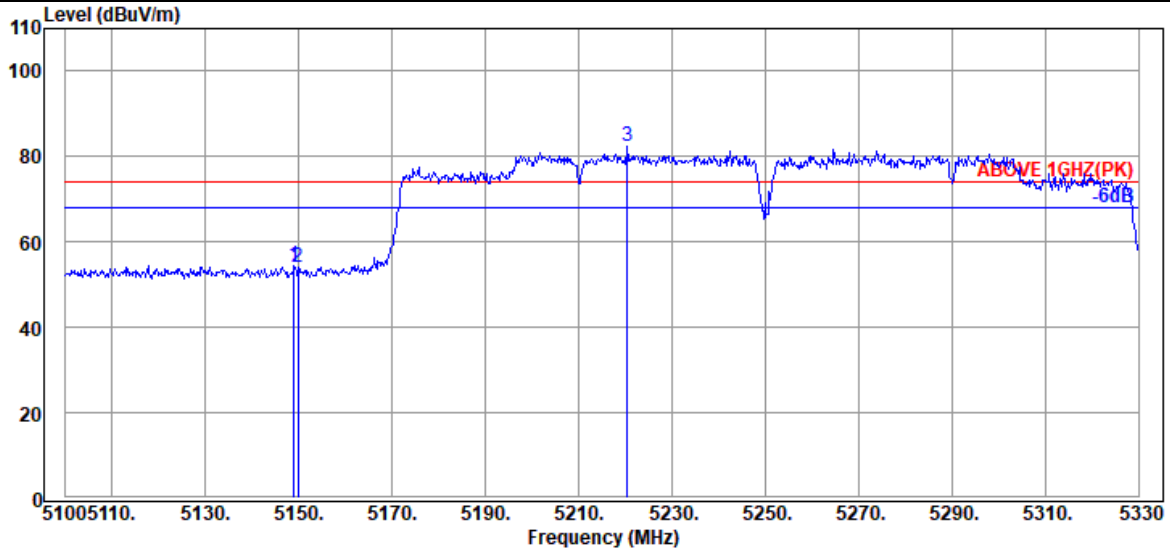

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	33.70	8.88	39.29	51.19	54.48	74.00	19.52	Peak
5149.910	33.70	8.88	39.29	50.66	53.95	74.00	20.05	Peak
@ 5220.520	33.75	8.93	39.28	79.15	82.55	---	---	Peak

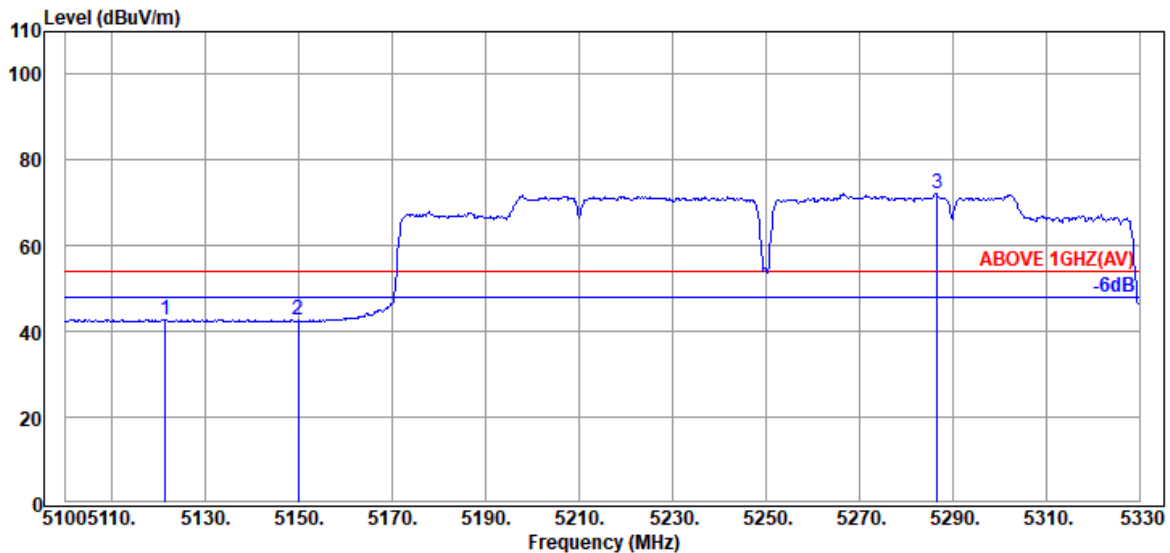


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.390	33.70	8.87	39.29	39.50	42.78	54.00	11.22	Average
5149.910	33.70	8.88	39.29	39.29	42.58	54.00	11.42	Average
@ 5286.760	34.00	8.96	39.28	68.47	72.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

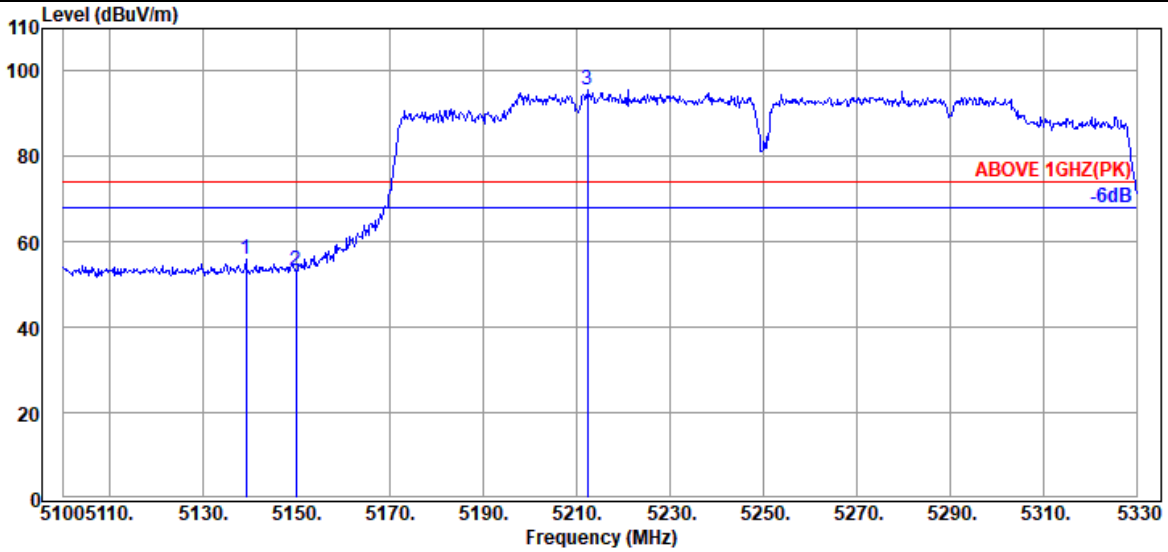

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.100	33.70	8.88	39.29	52.48	55.77	74.00	18.23	Peak
5149.910	33.70	8.88	39.29	50.19	53.48	74.00	20.52	Peak
@ 5212.240	33.72	8.92	39.28	92.14	95.50	---	---	Peak

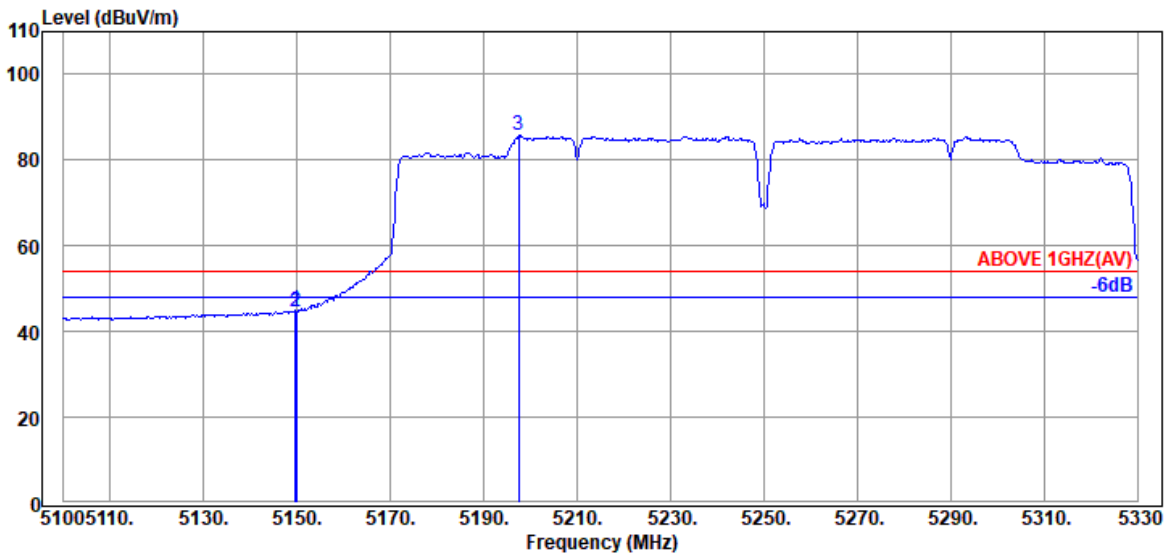


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	33.70	8.88	39.29	41.56	44.85	54.00	9.15	Average
5149.910	33.70	8.88	39.29	41.49	44.78	54.00	9.22	Average
@ 5197.520	33.70	8.91	39.28	82.46	85.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

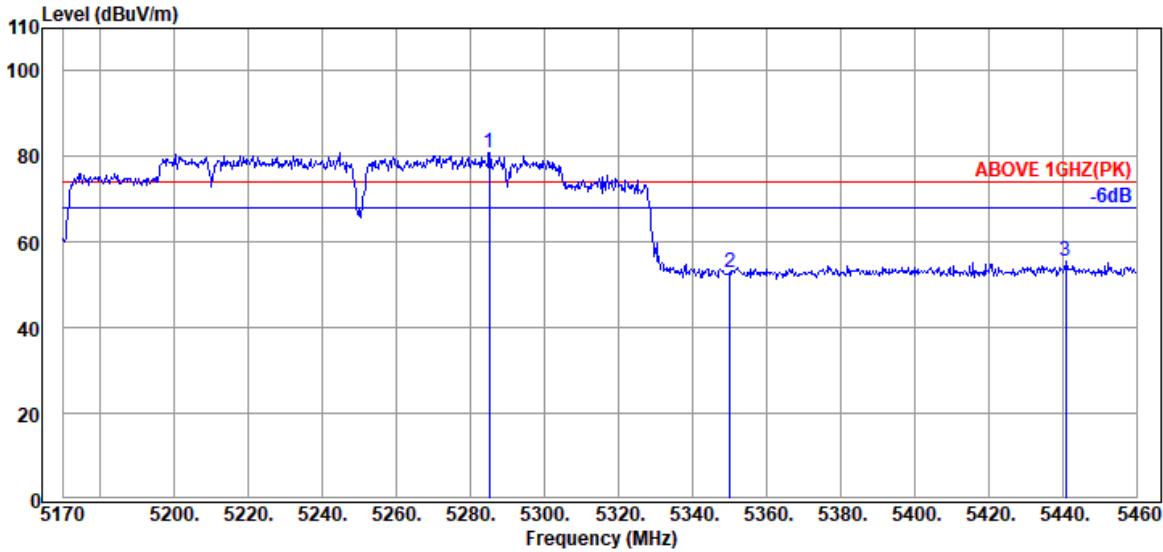

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5285.130	34.00	8.96	39.28	77.17	80.85	---	---	Peak
5350.090	33.90	8.99	39.27	49.41	53.03	74.00	20.97	Peak
5440.860	34.17	9.04	39.26	51.51	55.46	74.00	18.54	Peak

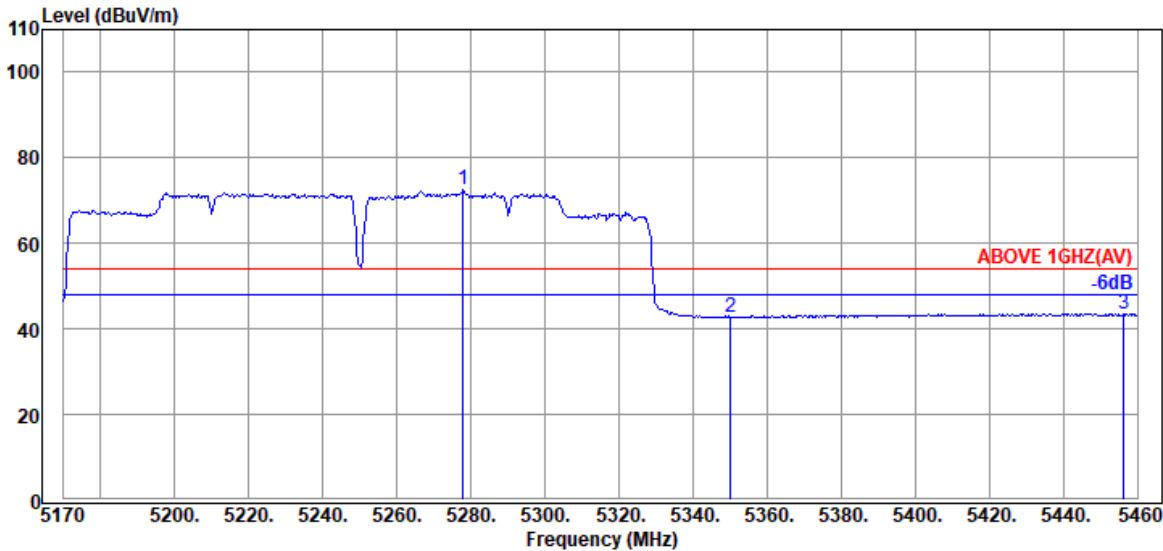


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.880	34.00	8.96	39.28	68.86	72.54	---	---	Average
5350.090	33.90	8.99	39.27	39.17	42.79	54.00	11.21	Average
5456.230	34.20	9.05	39.26	39.52	43.51	54.00	10.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

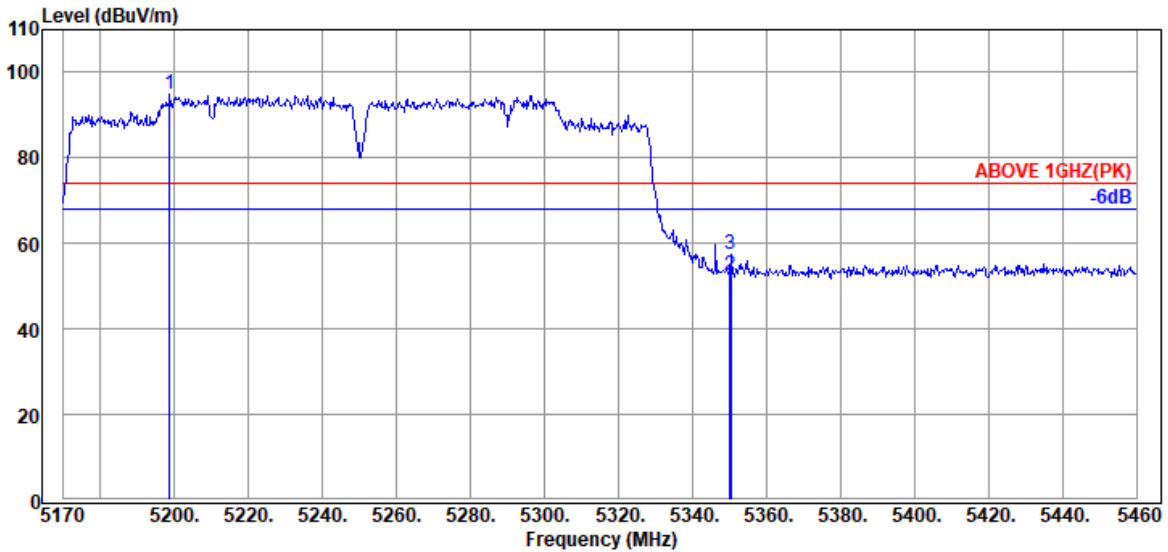

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5198.710	33.70	8.91	39.28	91.37	94.70	---	---	Peak
5350.090	33.90	8.99	39.27	49.10	52.72	74.00	21.28	Peak
5350.380	33.90	8.99	39.27	53.89	57.51	74.00	16.49	Peak

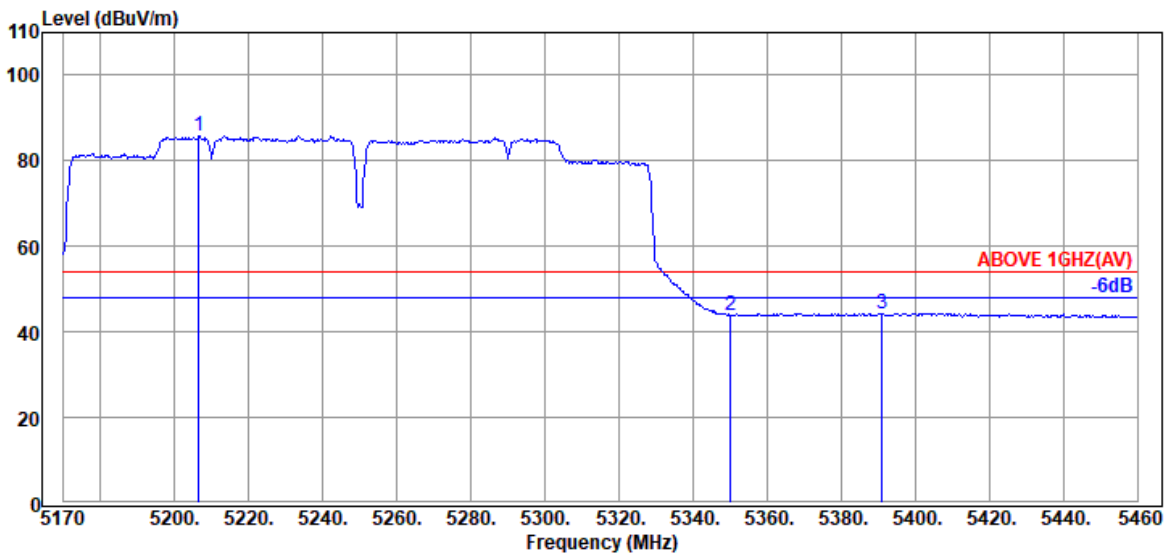


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5206.540	33.72	8.92	39.28	82.35	85.71	---	---	Average
5350.090	33.90	8.99	39.27	40.34	43.96	54.00	10.04	Average
5390.980	34.10	9.02	39.27	40.52	44.37	54.00	9.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

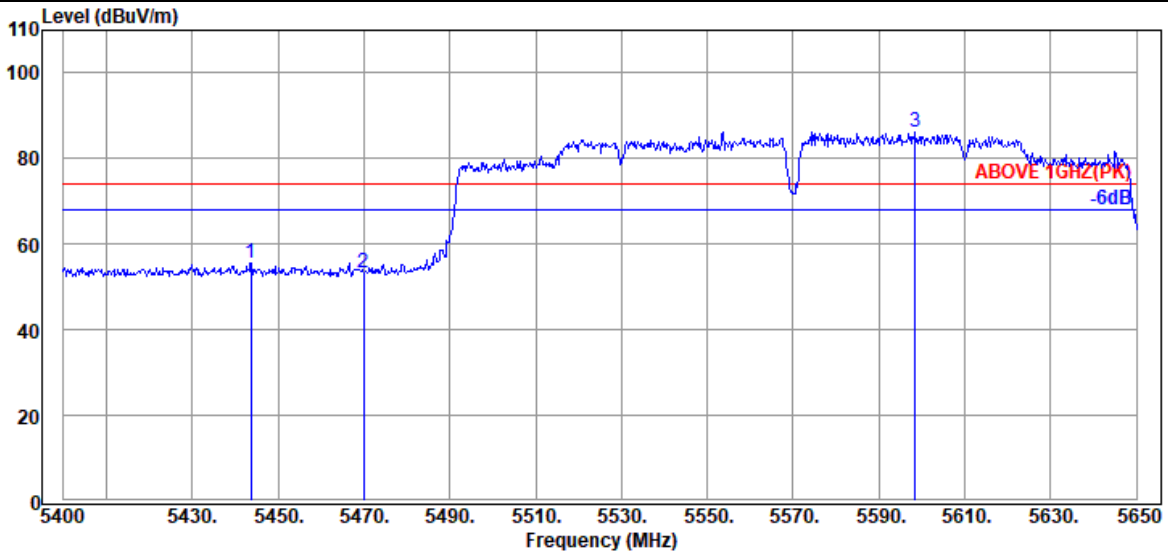

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.750	34.17	9.04	39.26	51.62	55.57	74.00	18.43	Peak
5470.000	34.17	9.06	39.26	49.32	53.29	74.00	20.71	Peak
@ 5598.500	34.00	9.13	39.28	82.42	86.27	---	---	Peak

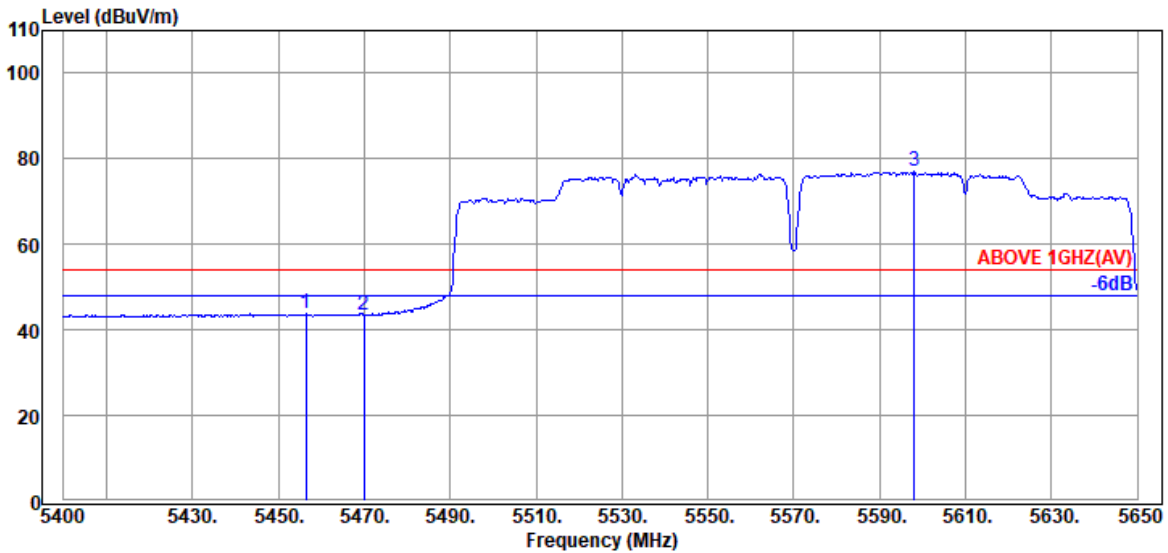


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.500	34.20	9.05	39.26	39.78	43.77	54.00	10.23	Average
5470.000	34.17	9.06	39.26	39.58	43.55	54.00	10.45	Average
@ 5598.000	34.00	9.13	39.28	73.07	76.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

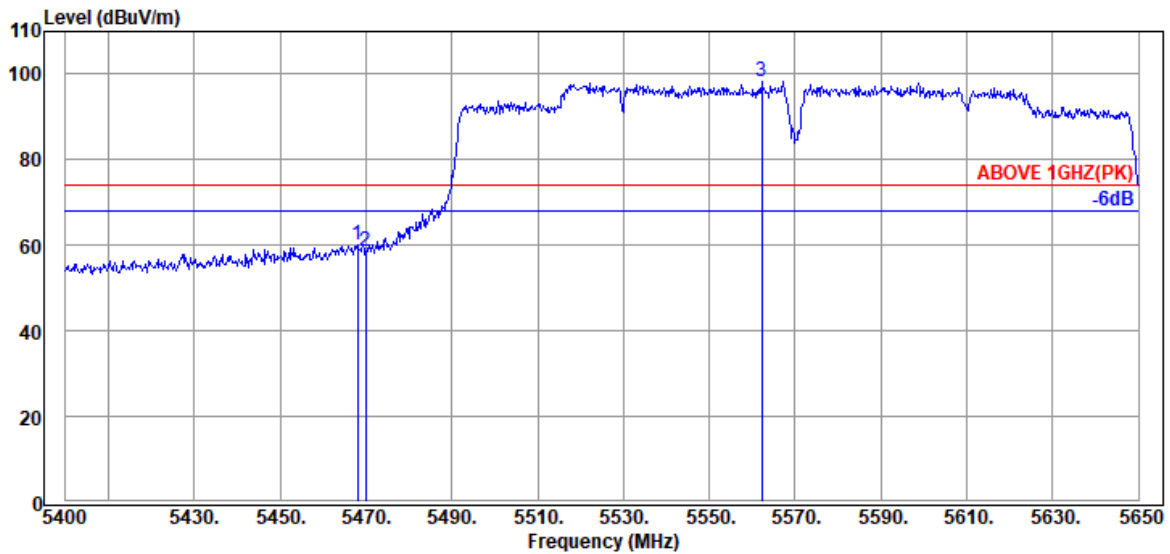

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.17	9.06	39.26	56.03	60.00	74.00	14.00	Peak
5470.000	34.17	9.06	39.26	54.48	58.45	74.00	15.55	Peak
@ 5562.250	34.07	9.11	39.27	94.28	98.19	---	---	Peak

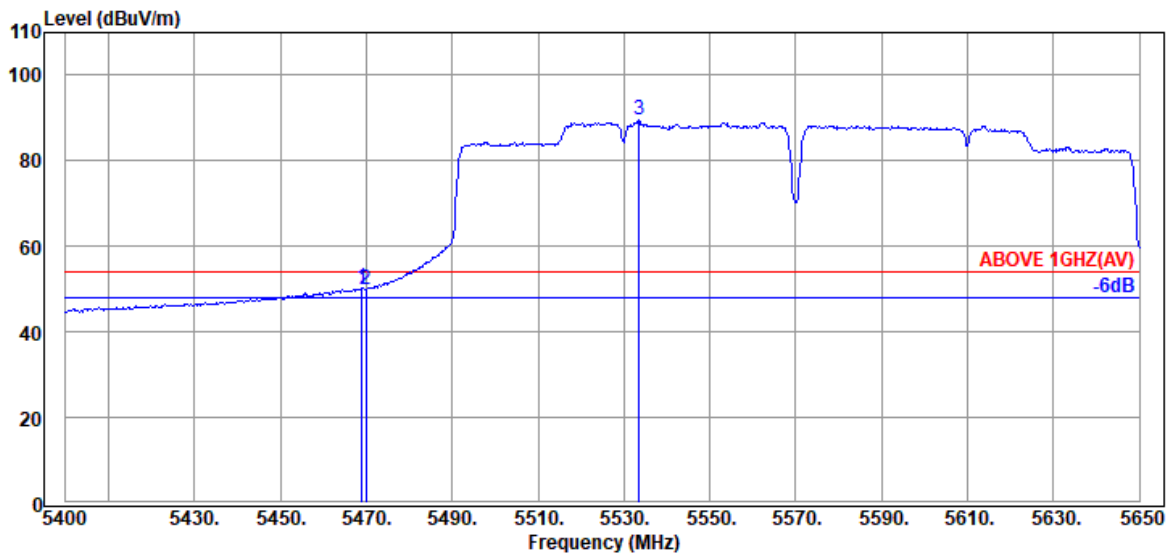


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	46.18	50.15	54.00	3.85	Average
5470.000	34.17	9.06	39.26	46.06	50.03	54.00	3.97	Average
@ 5533.500	34.10	9.09	39.27	85.58	89.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

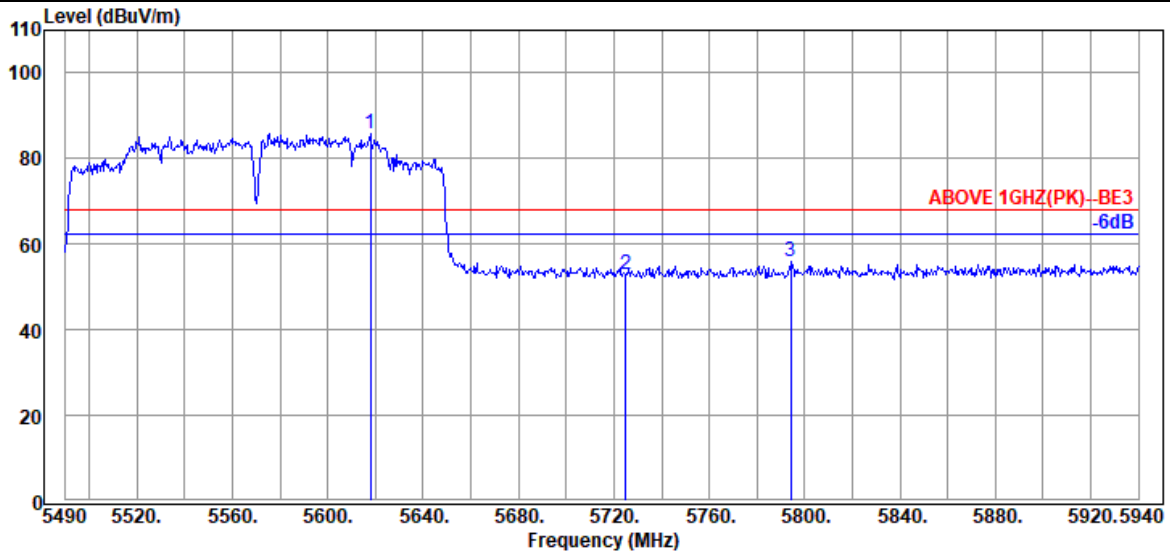

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5617.800	34.00	9.14	39.29	81.77	85.62	---	---	Peak
5724.900	33.80	9.20	39.30	49.19	52.89	68.20	15.31	Peak
5794.200	34.00	9.23	39.32	52.06	55.97	68.20	12.23	Peak

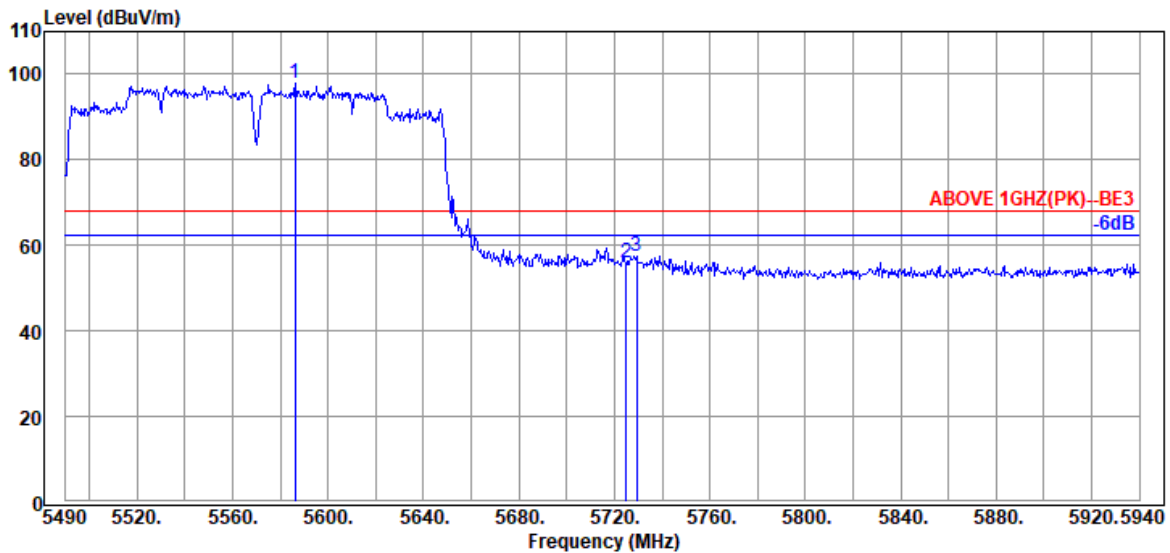


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5586.300	34.03	9.12	39.28	93.86	97.73	---	---	Peak
5724.900	33.80	9.20	39.30	52.40	56.10	68.20	12.10	Peak
5729.400	33.80	9.20	39.31	53.94	57.63	68.20	10.57	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

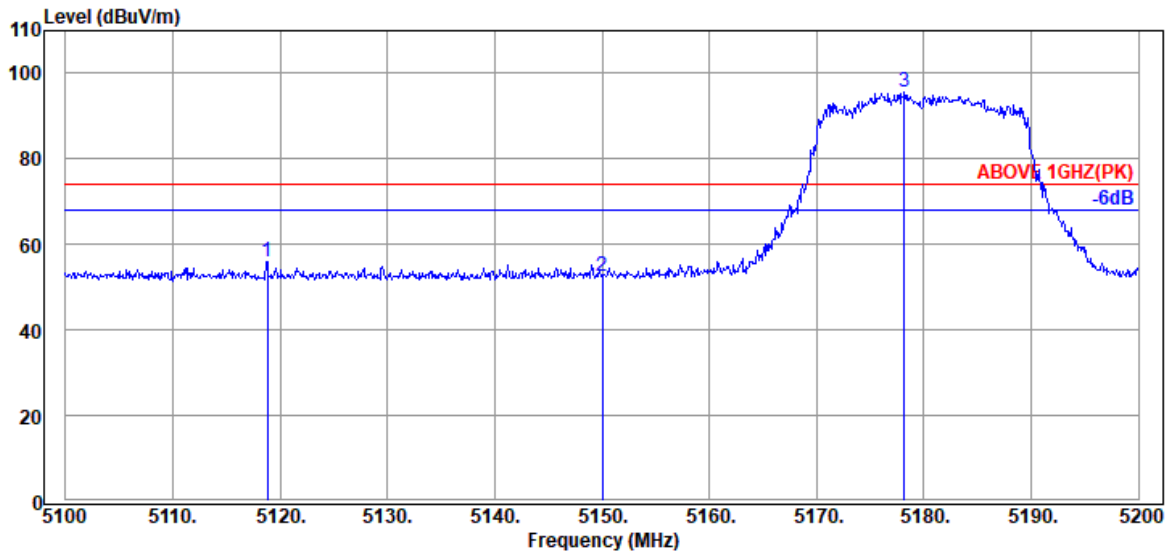

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.800	33.70	8.87	39.29	52.51	55.79	74.00	18.21	Peak
5150.000	33.70	8.88	39.29	49.42	52.71	74.00	21.29	Peak
@ 5178.200	33.70	8.90	39.28	92.20	95.52	---	---	Peak

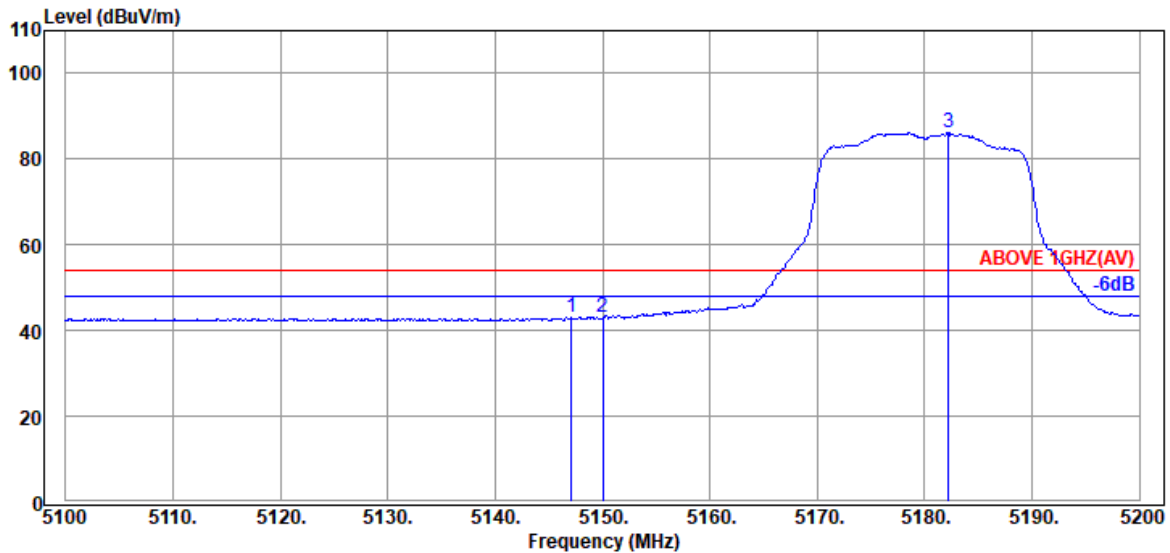


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.70	8.88	39.29	39.77	43.06	54.00	10.94	Average
5150.000	33.70	8.88	39.29	39.62	42.91	54.00	11.09	Average
@ 5182.200	33.70	8.90	39.28	82.91	86.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

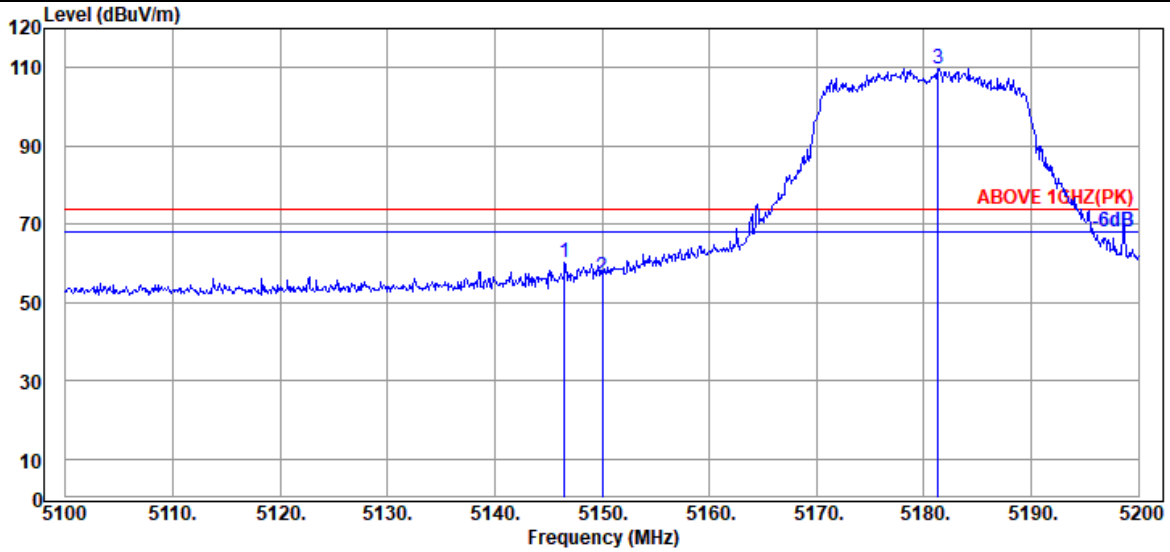

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	33.70	8.88	39.29	56.78	60.07	74.00	13.93	Peak
5150.000	33.70	8.88	39.29	53.07	56.36	74.00	17.64	Peak
@ 5181.300	33.70	8.90	39.28	106.35	109.67	---	---	Peak

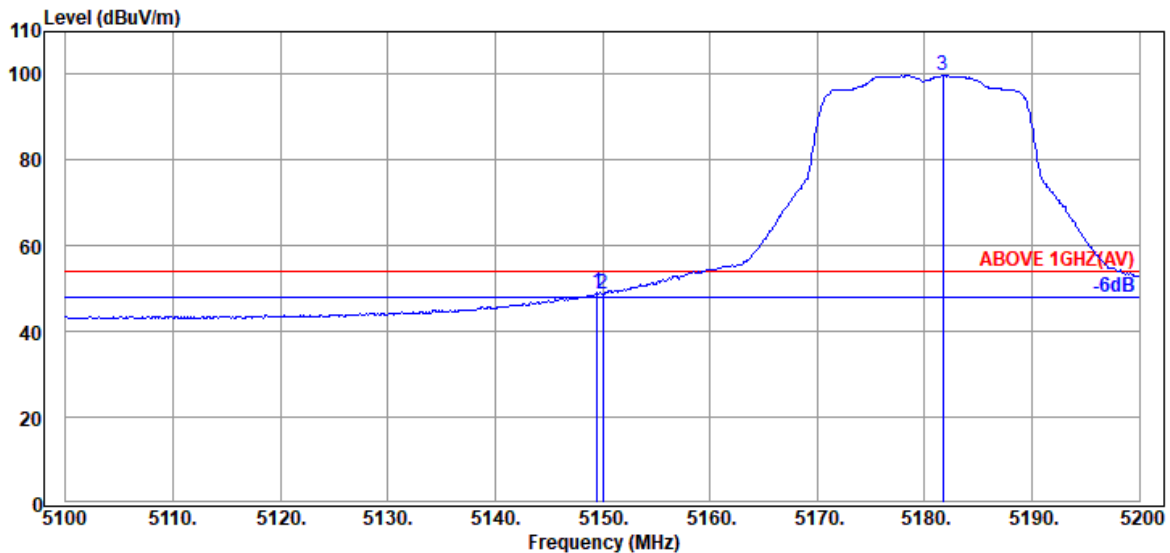


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.88	39.29	45.71	49.00	54.00	5.00	Average
5150.000	33.70	8.88	39.29	45.42	48.71	54.00	5.29	Average
@ 5181.700	33.70	8.90	39.28	96.52	99.84	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

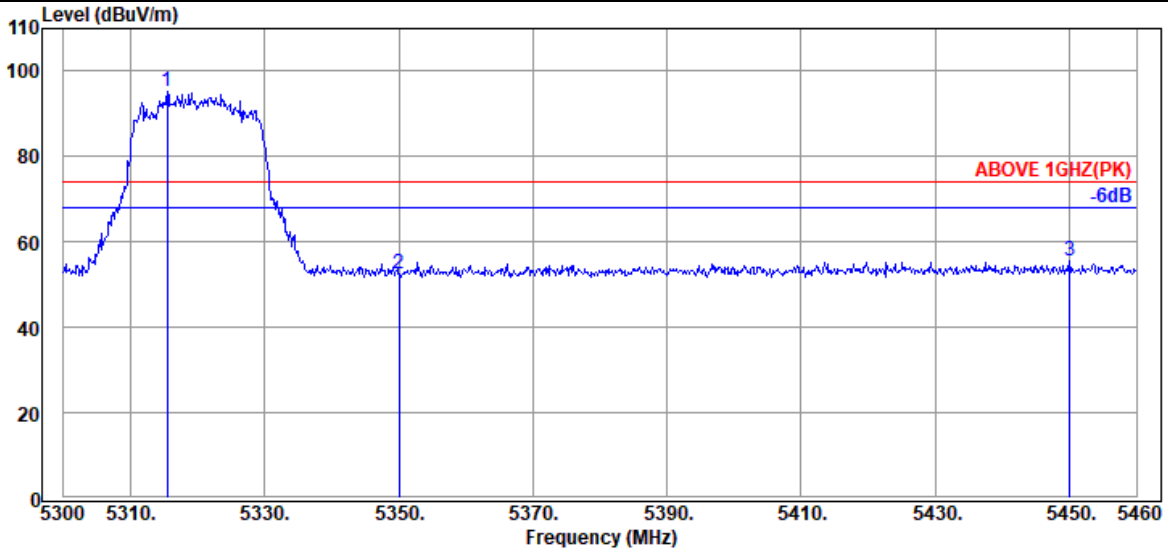

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.520	34.03	8.98	39.27	91.55	95.29	---	---	Peak
5350.080	33.90	8.99	39.27	49.10	52.72	74.00	21.28	Peak
5450.080	34.20	9.05	39.26	51.51	55.50	74.00	18.50	Peak

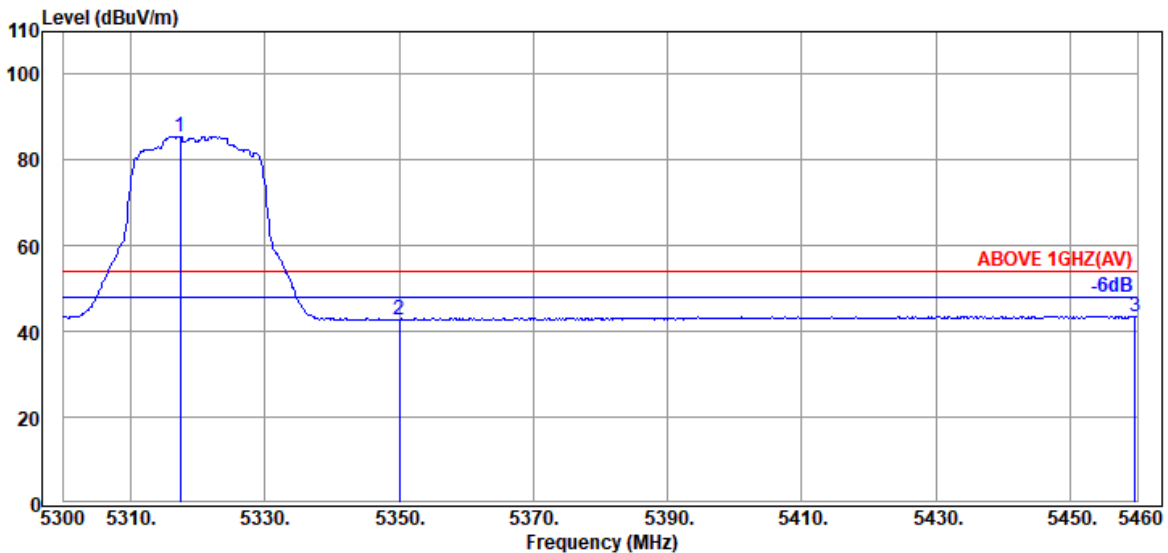


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	34.03	8.98	39.27	81.86	85.60	---	---	Average
5350.080	33.90	8.99	39.27	39.24	42.86	54.00	11.14	Average
5459.680	34.20	9.05	39.26	39.57	43.56	54.00	10.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

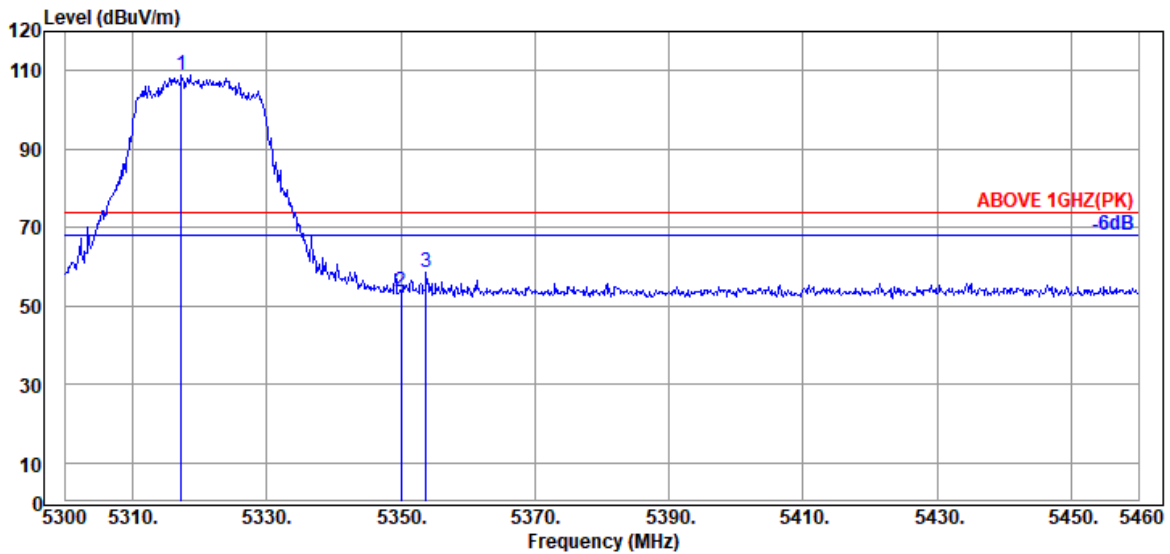

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.280	34.03	8.98	39.27	104.96	108.70	---	---	Peak
5350.080	33.90	8.99	39.27	50.15	53.77	74.00	20.23	Peak
5353.760	33.90	8.99	39.27	54.86	58.48	74.00	15.52	Peak

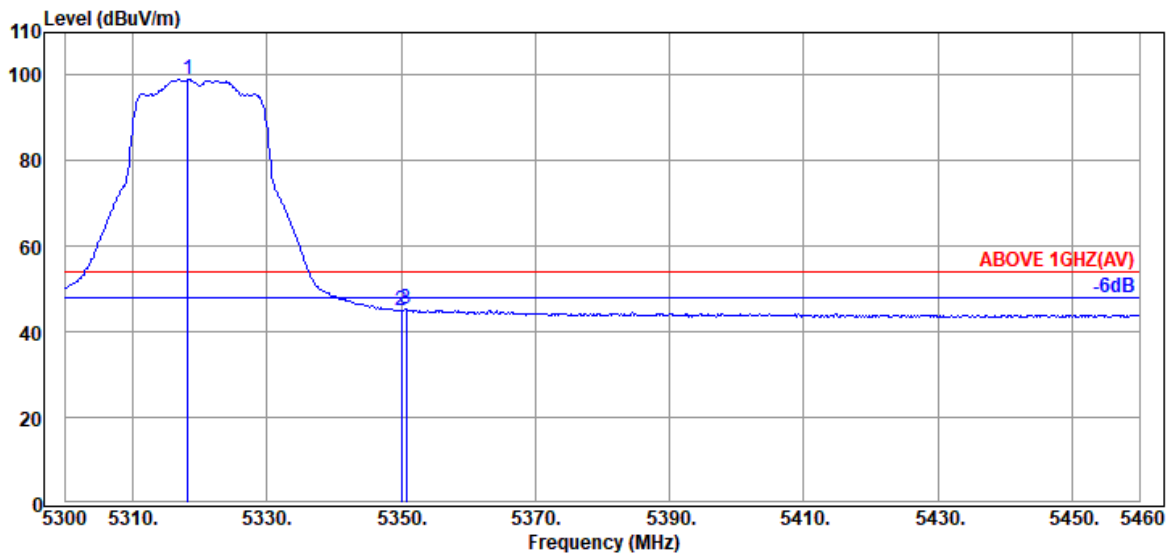


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.240	34.03	8.98	39.27	95.32	99.06	---	---	Average
5350.080	33.90	8.99	39.27	41.47	45.09	54.00	8.91	Average
5350.720	33.90	8.99	39.27	41.58	45.20	54.00	8.80	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

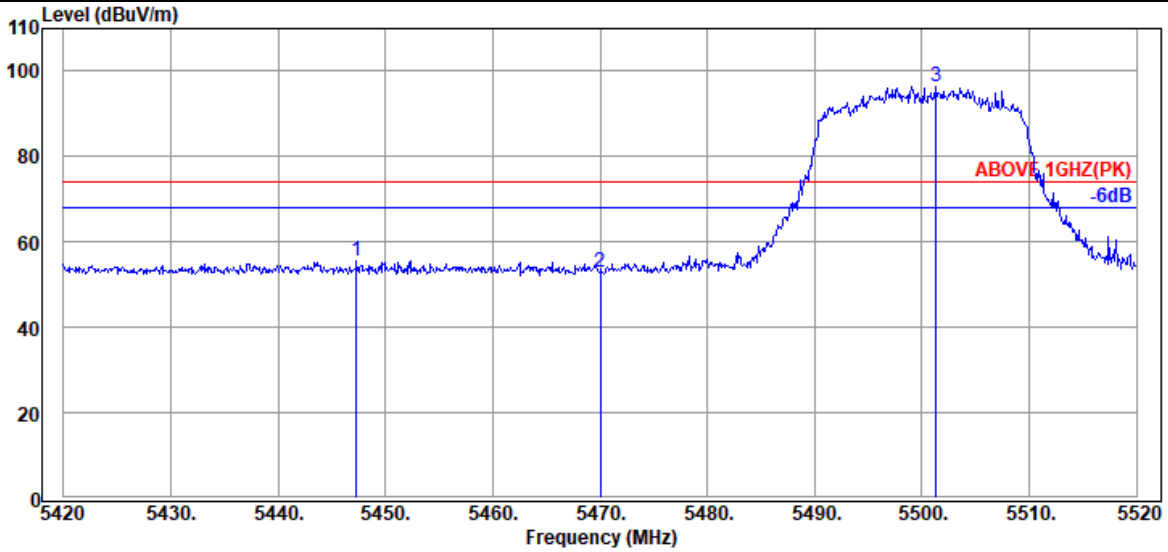

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.300	34.17	9.04	39.26	51.76	55.71	74.00	18.29	Peak
5470.000	34.17	9.06	39.26	48.99	52.96	74.00	21.04	Peak
@ 5501.300	34.10	9.08	39.26	92.54	96.46	---	---	Peak

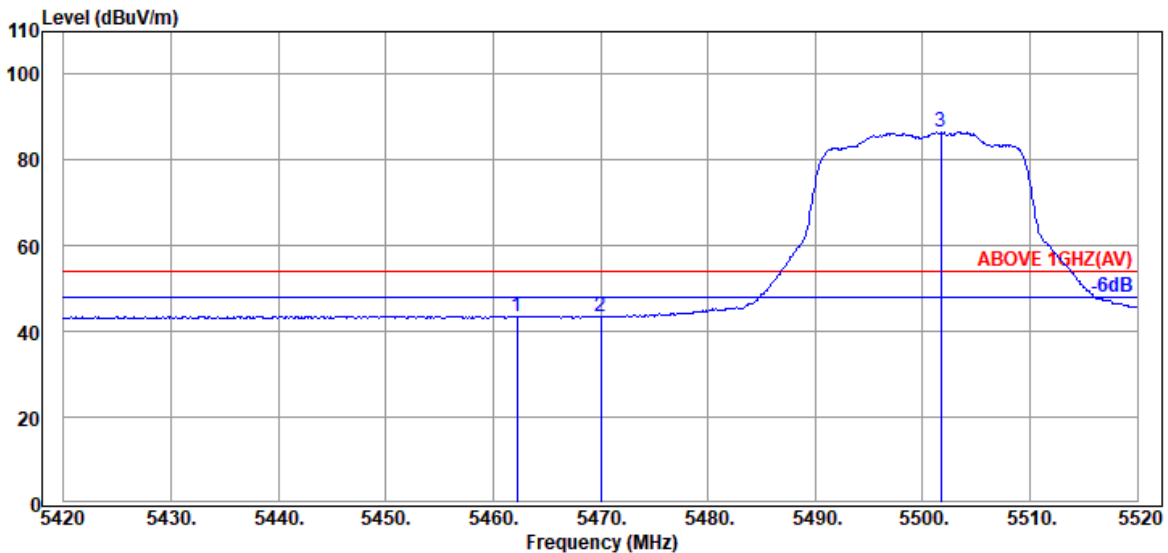


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.200	34.20	9.05	39.26	39.58	43.57	54.00	10.43	Average
5470.000	34.17	9.06	39.26	39.52	43.49	54.00	10.51	Average
@ 5501.700	34.10	9.08	39.26	82.60	86.52	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

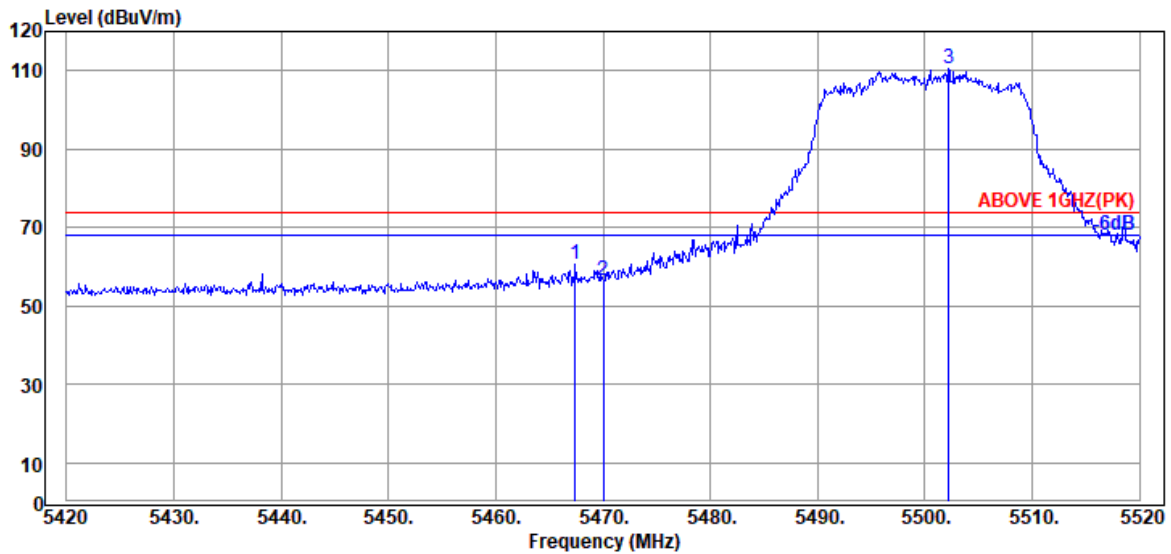

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	9.06	39.26	56.60	60.57	74.00	13.43	Peak
5470.000	34.17	9.06	39.26	52.44	56.41	74.00	17.59	Peak
@ 5502.200	34.10	9.08	39.26	106.53	110.45	---	---	Peak

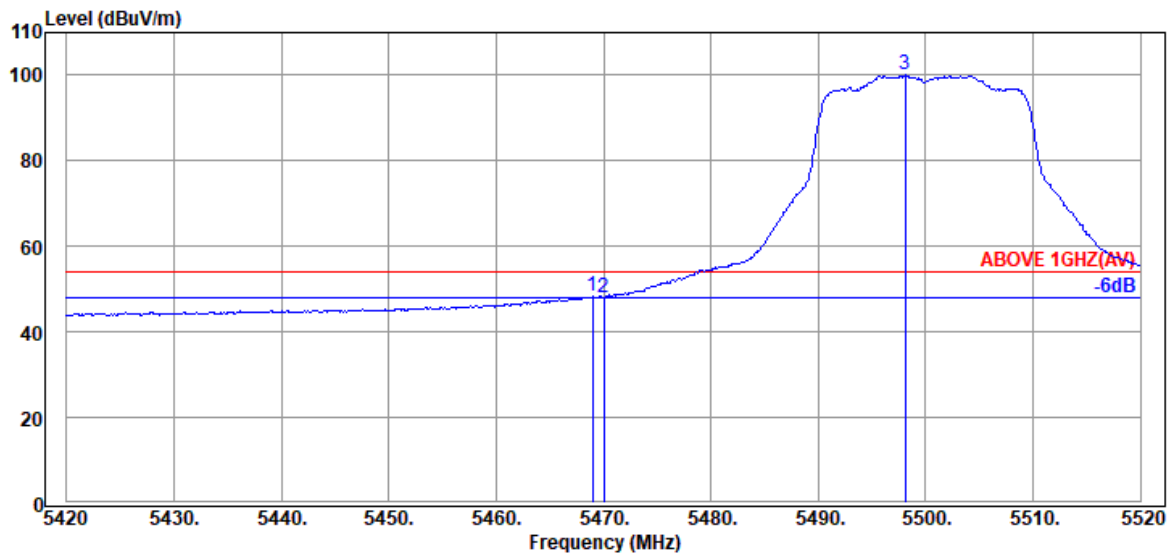


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.17	9.06	39.26	44.23	48.20	54.00	5.80	Average
5470.000	34.17	9.06	39.26	43.98	47.95	54.00	6.05	Average
@ 5498.100	34.10	9.08	39.26	96.16	100.08	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

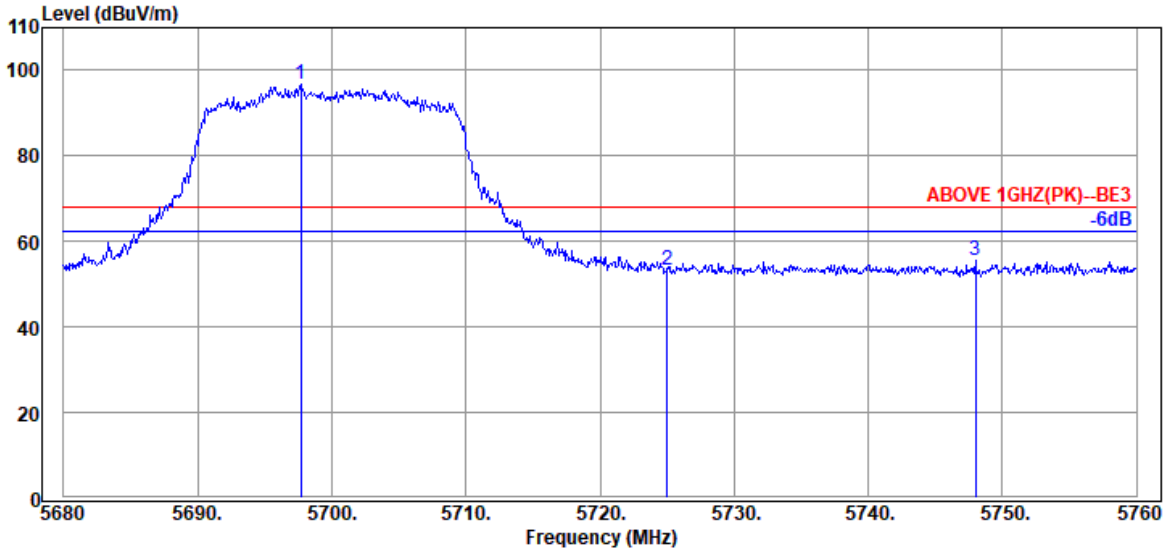

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.680	33.80	9.18	39.30	93.20	96.88	---	---	Peak
5725.040	33.80	9.20	39.30	49.77	53.47	68.20	14.73	Peak
5748.000	33.80	9.20	39.31	51.70	55.39	68.20	12.81	Peak

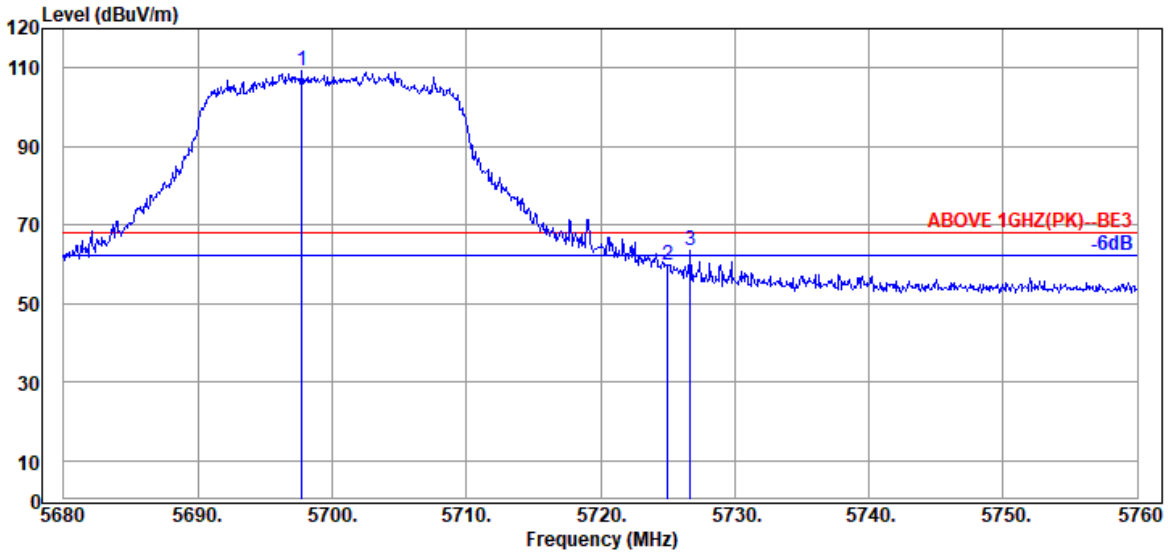


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.760	33.80	9.18	39.30	105.79	109.47	---	---	Peak
5725.040	33.80	9.20	39.30	55.96	59.66	68.20	8.54	Peak
5726.720	33.80	9.20	39.31	60.01	63.70	68.20	4.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

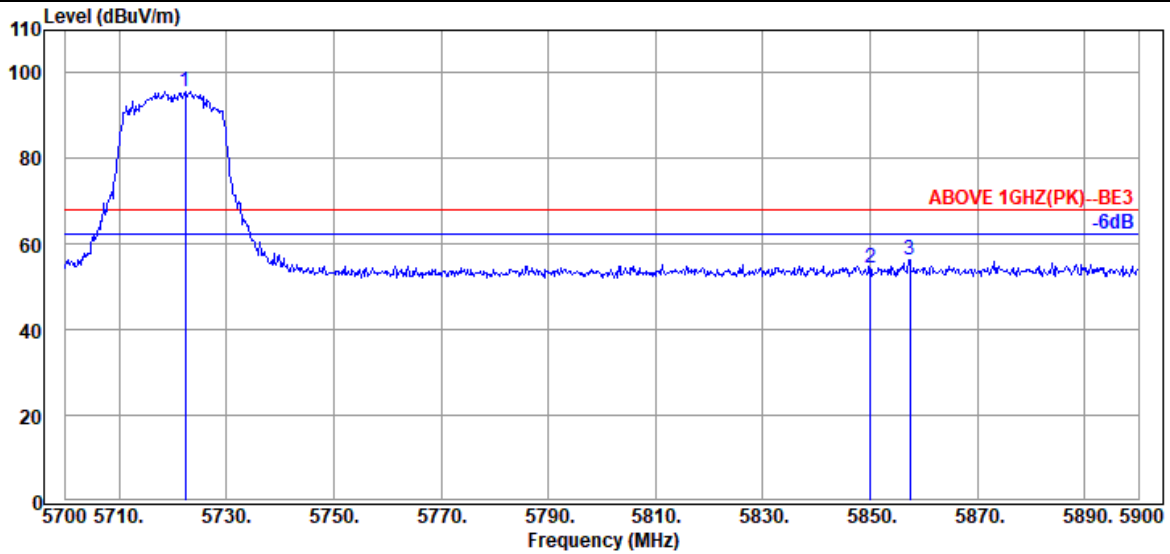

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.400	33.80	9.20	39.30	91.97	95.67	---	---	Peak
5850.000	34.10	9.25	39.33	50.30	54.32	68.20	13.88	Peak
5857.400	34.10	9.26	39.33	52.46	56.49	68.20	11.71	Peak

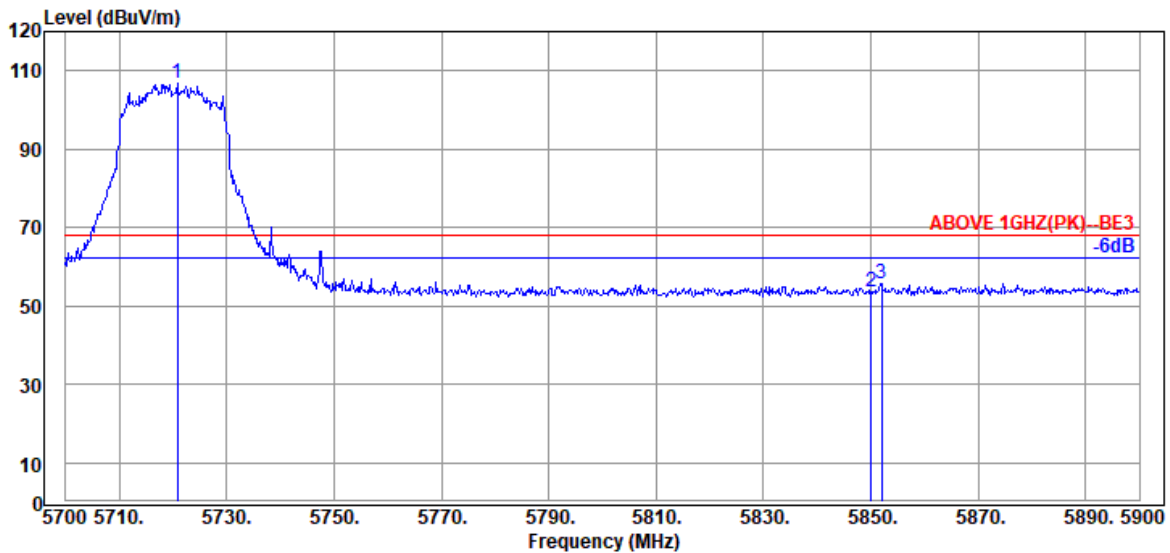


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.800	33.80	9.19	39.30	103.02	106.71	---	---	Peak
5850.000	34.10	9.25	39.33	49.58	53.60	68.20	14.60	Peak
5852.000	34.10	9.25	39.33	51.68	55.70	68.20	12.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

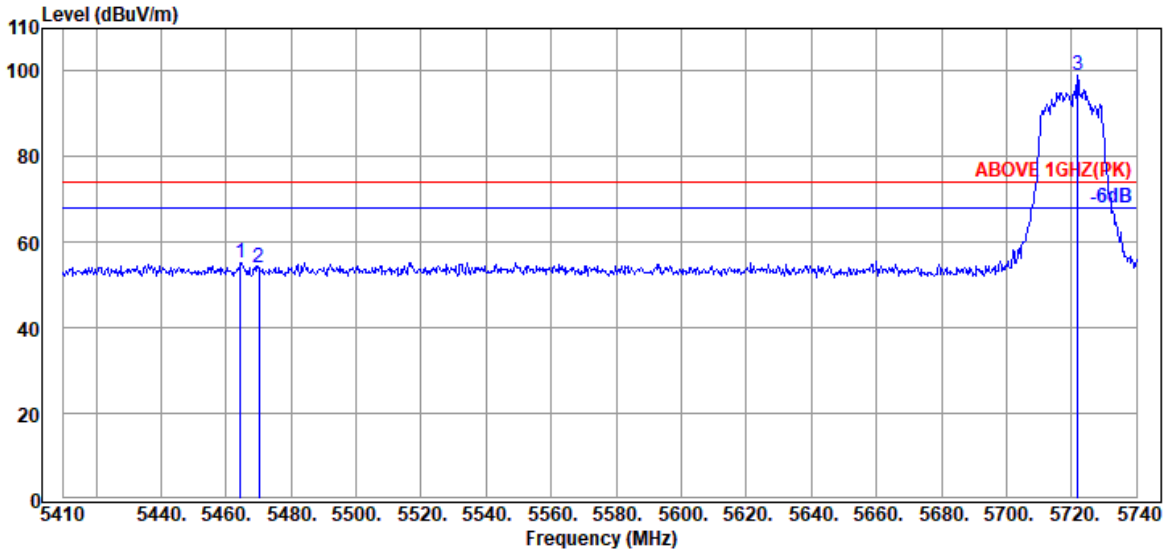

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	34.17	9.06	39.26	51.04	55.01	74.00	18.99	Peak
5470.060	34.17	9.06	39.26	49.93	53.90	74.00	20.10	Peak
@ 5721.850	33.80	9.19	39.30	95.33	99.02	---	---	Peak

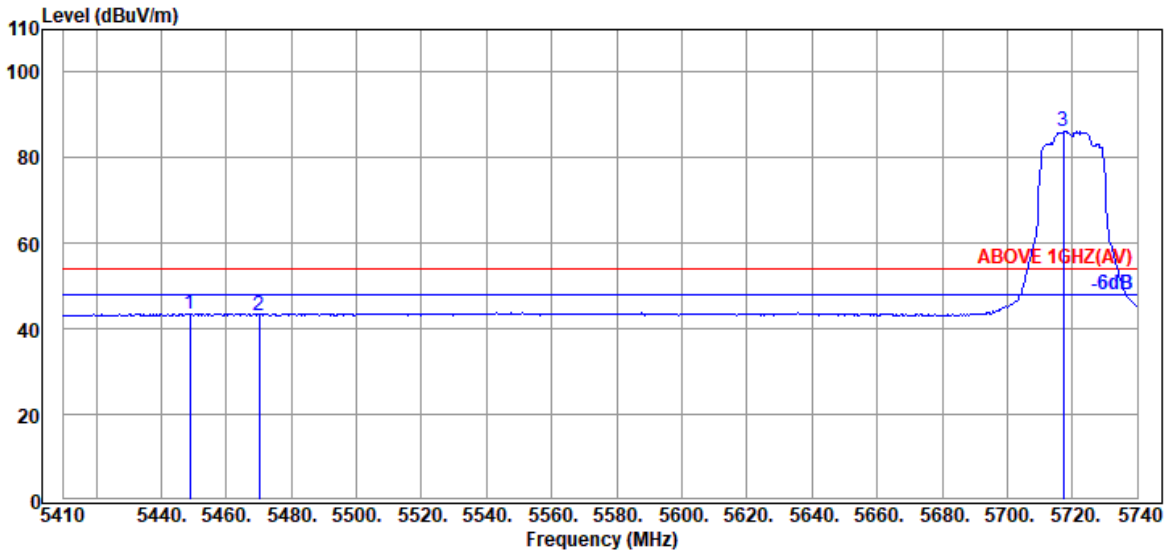


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.940	34.20	9.05	39.26	39.64	43.63	54.00	10.37	Average
5470.060	34.17	9.06	39.26	39.31	43.28	54.00	10.72	Average
@ 5717.230	33.80	9.19	39.30	82.41	86.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

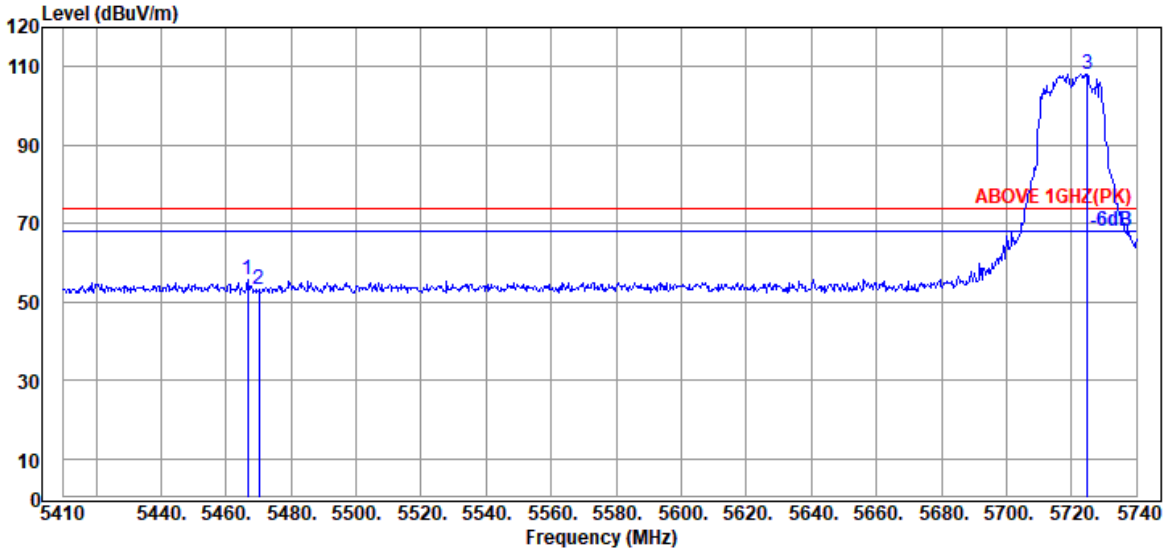

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.760	34.17	9.06	39.26	51.71	55.68	74.00	18.32	Peak
5470.060	34.17	9.06	39.26	49.05	53.02	74.00	20.98	Peak
@ 5724.820	33.80	9.20	39.30	104.45	108.15	---	---	Peak

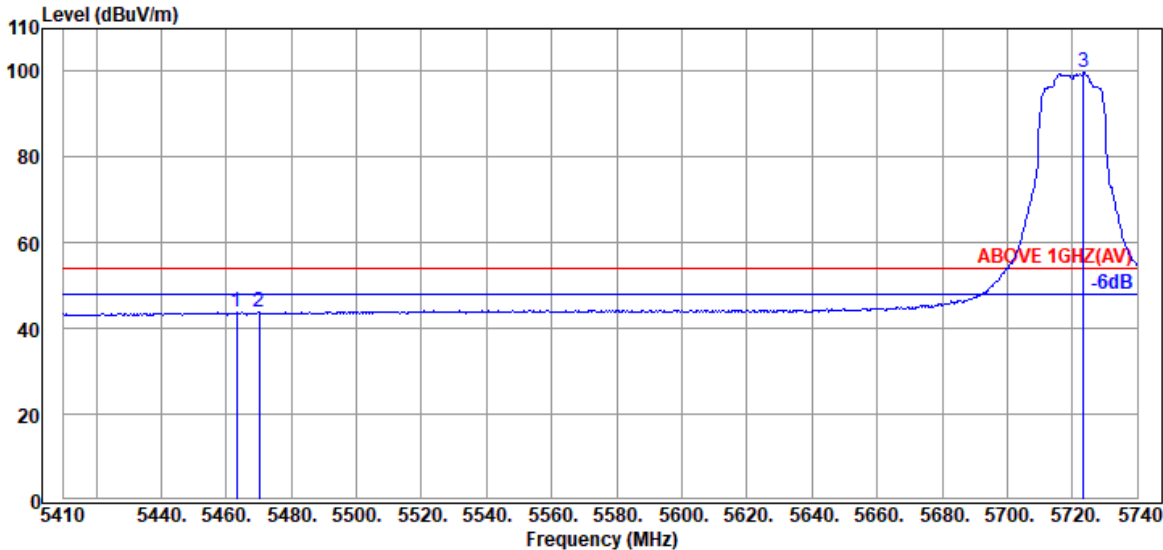


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.130	34.20	9.05	39.26	39.79	43.78	54.00	10.22	Average
5470.060	34.17	9.06	39.26	39.73	43.70	54.00	10.30	Average
@ 5723.500	33.80	9.20	39.30	95.98	99.68	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

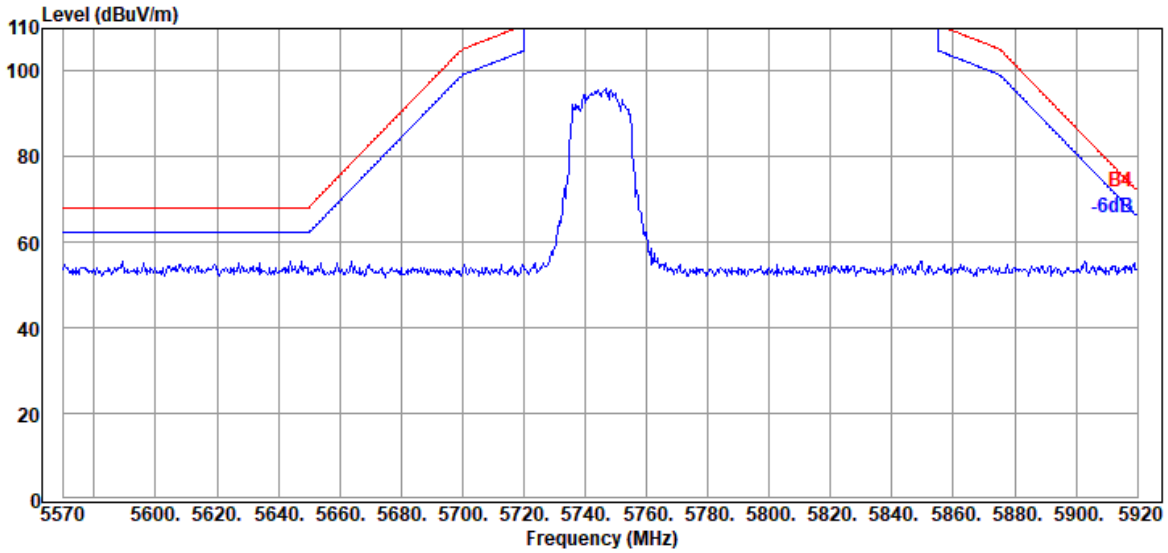


Antenna at Vertical Polarization

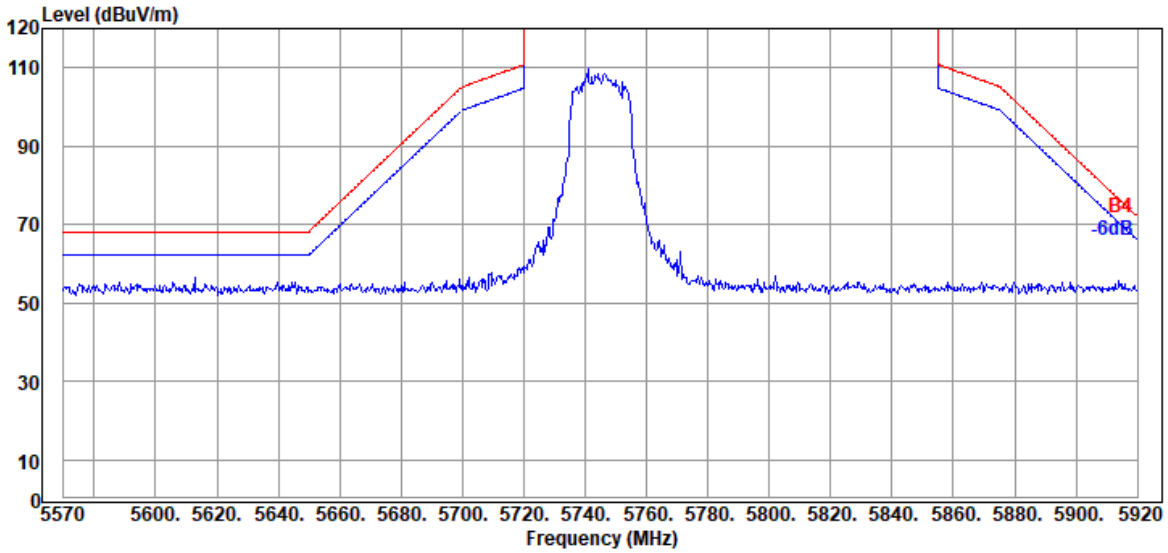


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

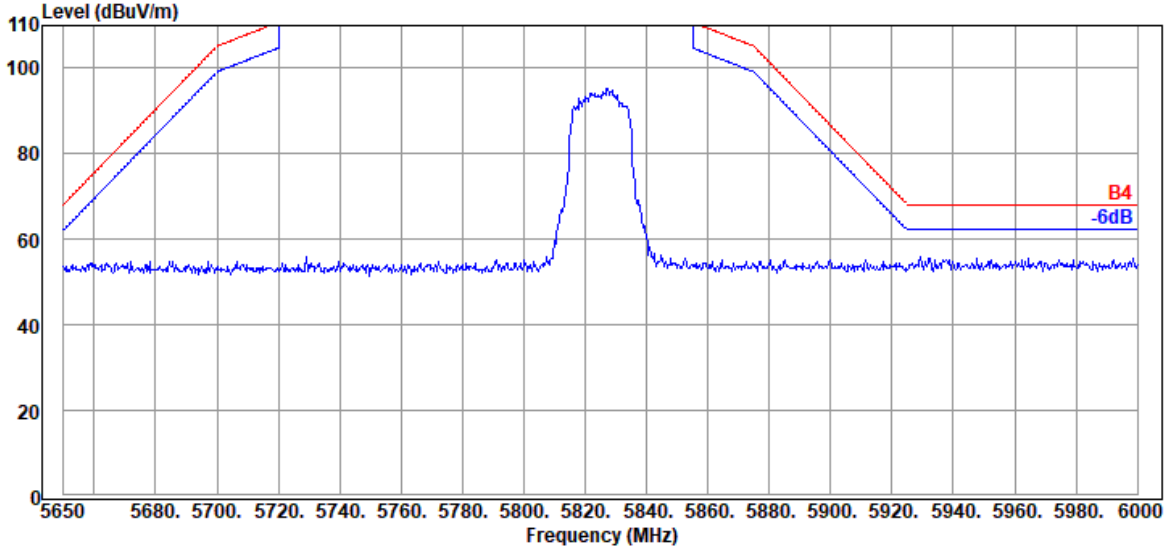

Antenna at Vertical Polarization

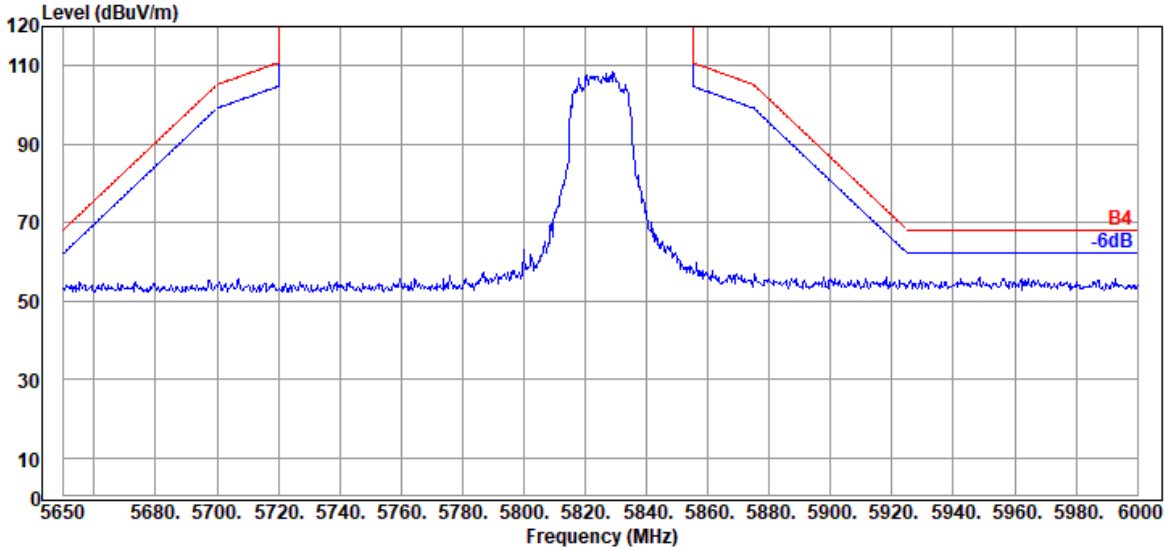


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

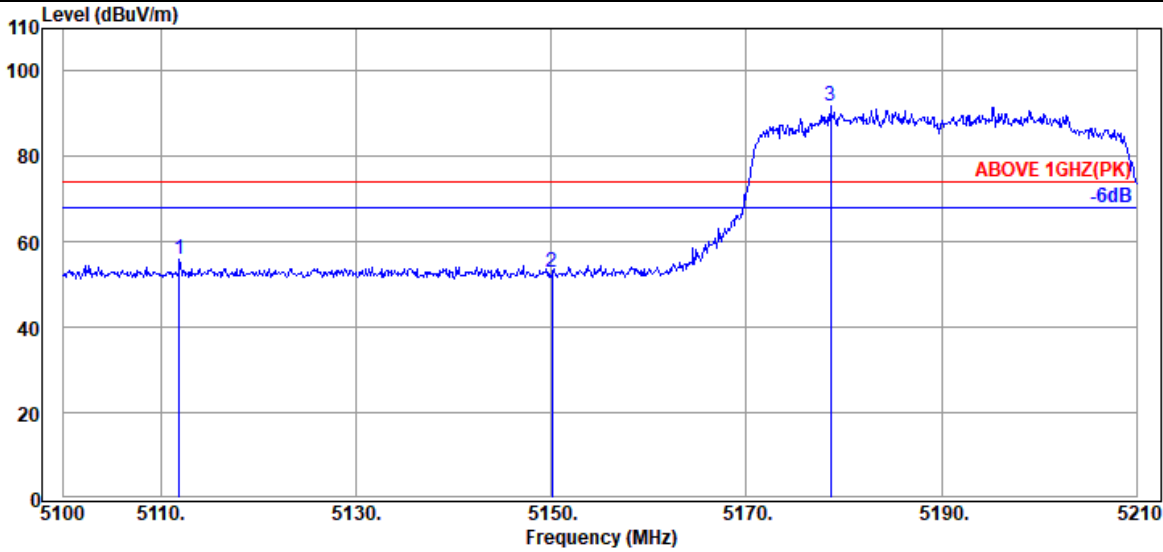

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.880	33.70	8.86	39.29	52.52	55.79	74.00	18.21	Peak
5150.050	33.70	8.88	39.29	49.66	52.95	74.00	21.05	Peak
@ 5178.650	33.70	8.90	39.28	88.67	91.99	---	---	Peak

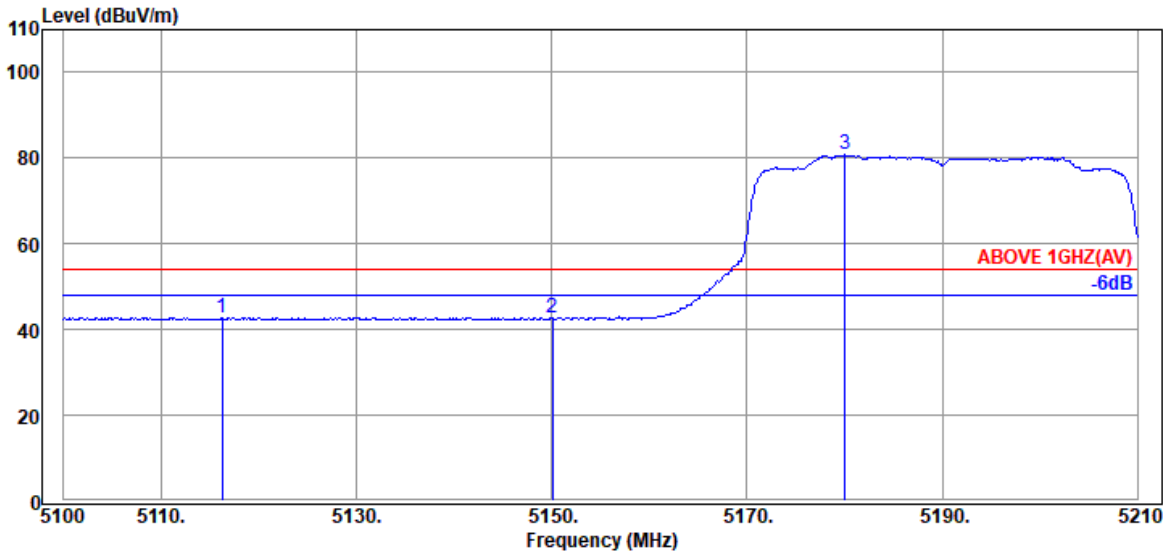


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.280	33.70	8.87	39.29	39.46	42.74	54.00	11.26	Average
5150.050	33.70	8.88	39.29	39.49	42.78	54.00	11.22	Average
@ 5180.080	33.70	8.90	39.28	77.50	80.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

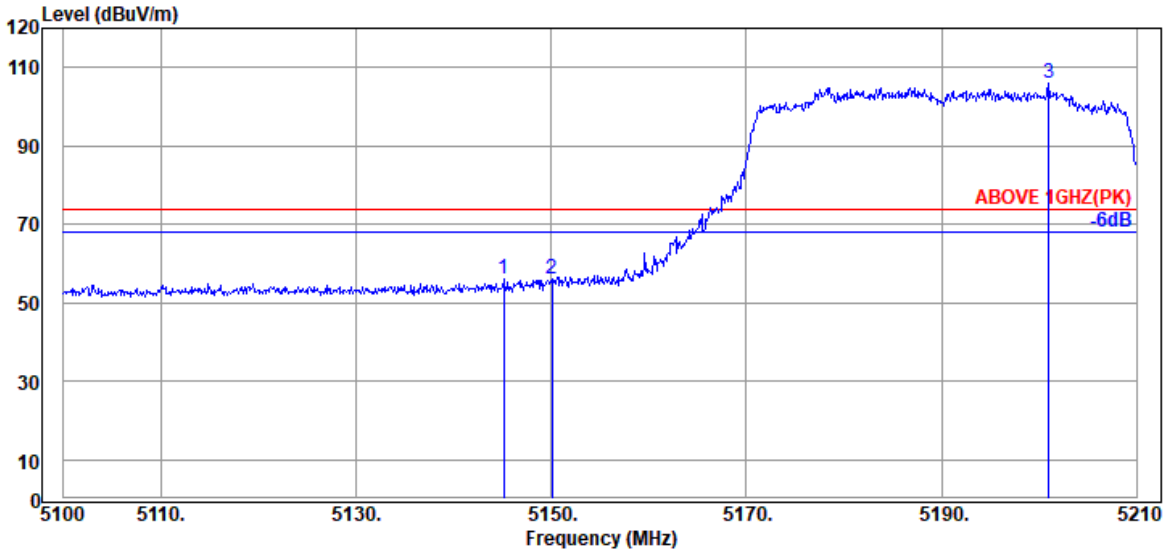

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.100	33.70	8.88	39.29	52.59	55.88	74.00	18.12	Peak
5150.050	33.70	8.88	39.29	52.95	56.24	74.00	17.76	Peak
@ 5200.980	33.70	8.91	39.28	102.76	106.09	---	---	Peak

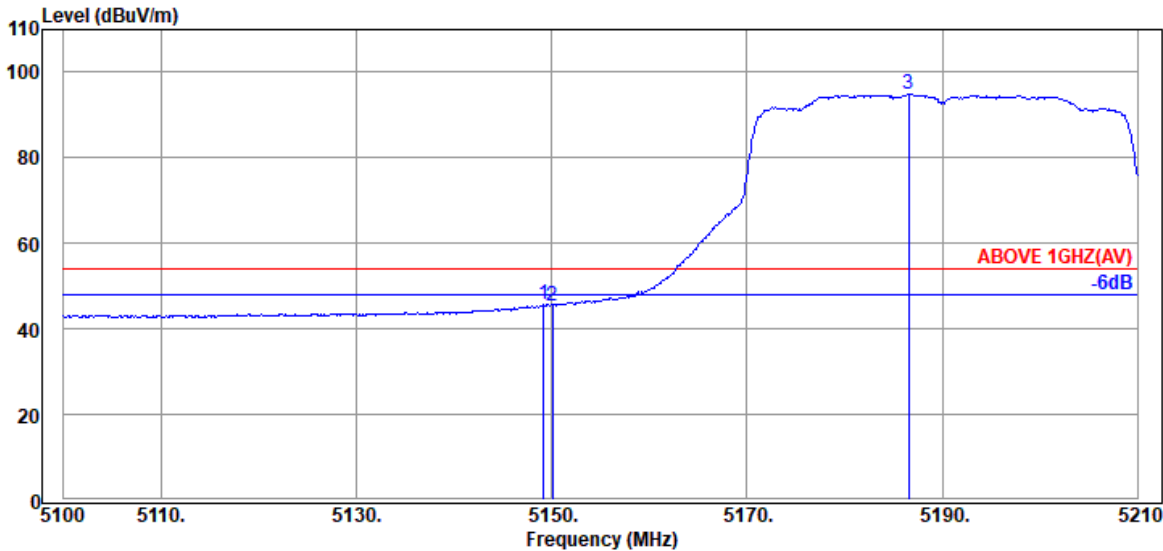


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	33.70	8.88	39.29	42.42	45.71	54.00	8.29	Average
5150.050	33.70	8.88	39.29	42.17	45.46	54.00	8.54	Average
@ 5186.570	33.70	8.91	39.28	91.62	94.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

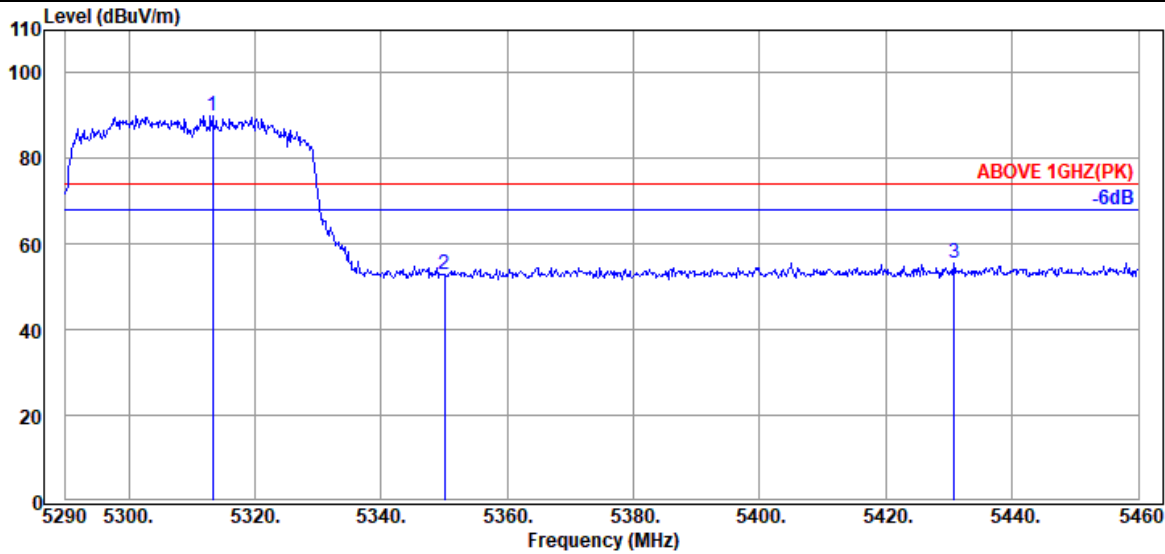

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.290	34.03	8.98	39.27	86.33	90.07	---	---	Peak
5350.010	33.90	8.99	39.27	49.47	53.09	74.00	20.91	Peak
5430.760	34.15	9.04	39.27	51.77	55.69	74.00	18.31	Peak

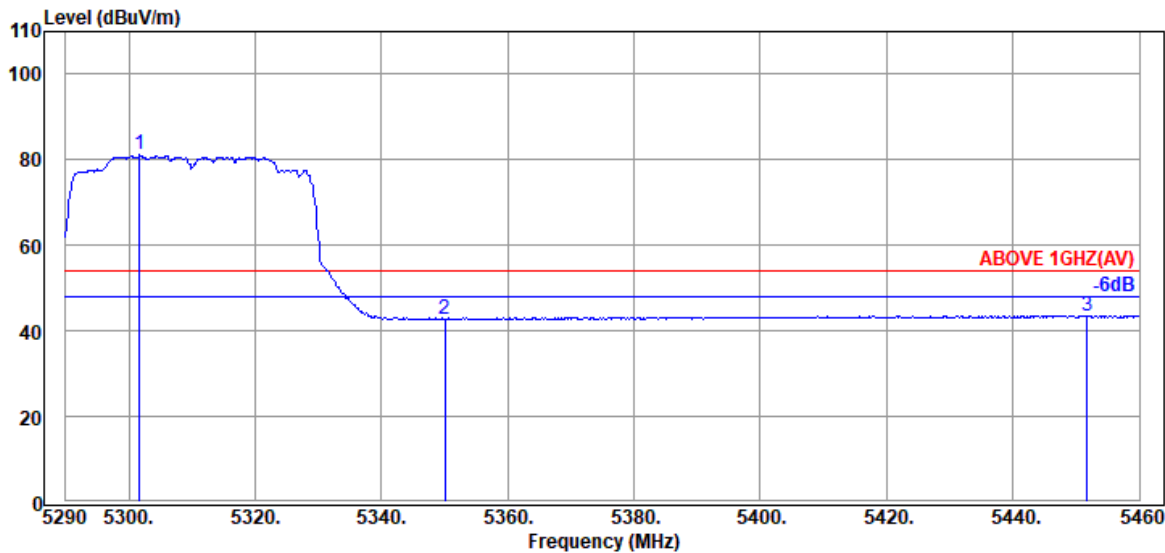


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.730	34.10	8.97	39.28	77.30	81.09	---	---	Average
5350.010	33.90	8.99	39.27	39.04	42.66	54.00	11.34	Average
5451.670	34.20	9.05	39.26	39.62	43.61	54.00	10.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

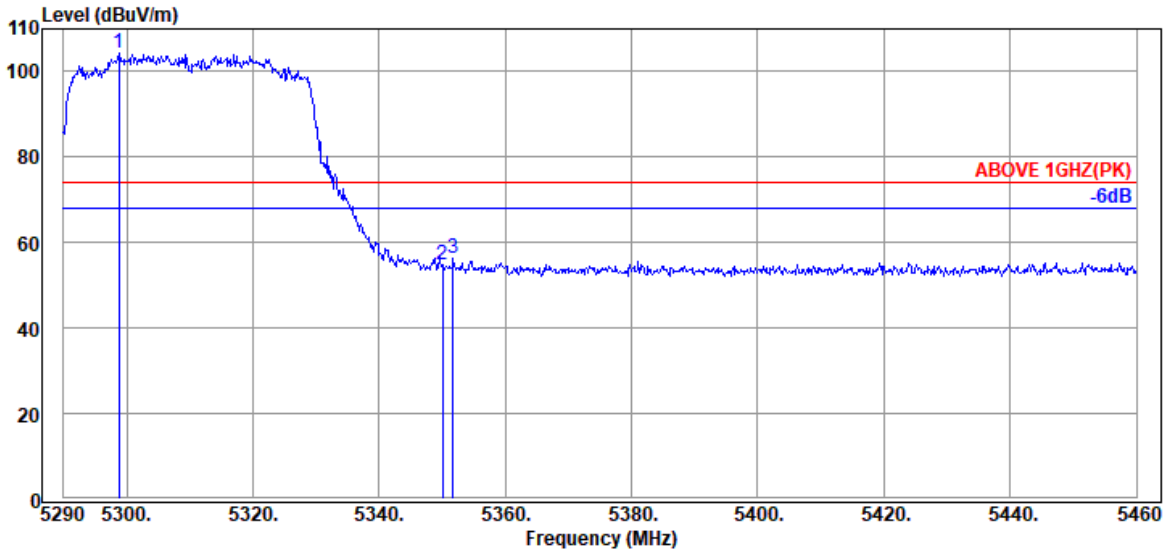

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.840	34.10	8.97	39.28	100.56	104.35	---	---	Peak
5350.010	33.90	8.99	39.27	51.11	54.73	74.00	19.27	Peak
5351.710	33.90	8.99	39.27	52.65	56.27	74.00	17.73	Peak

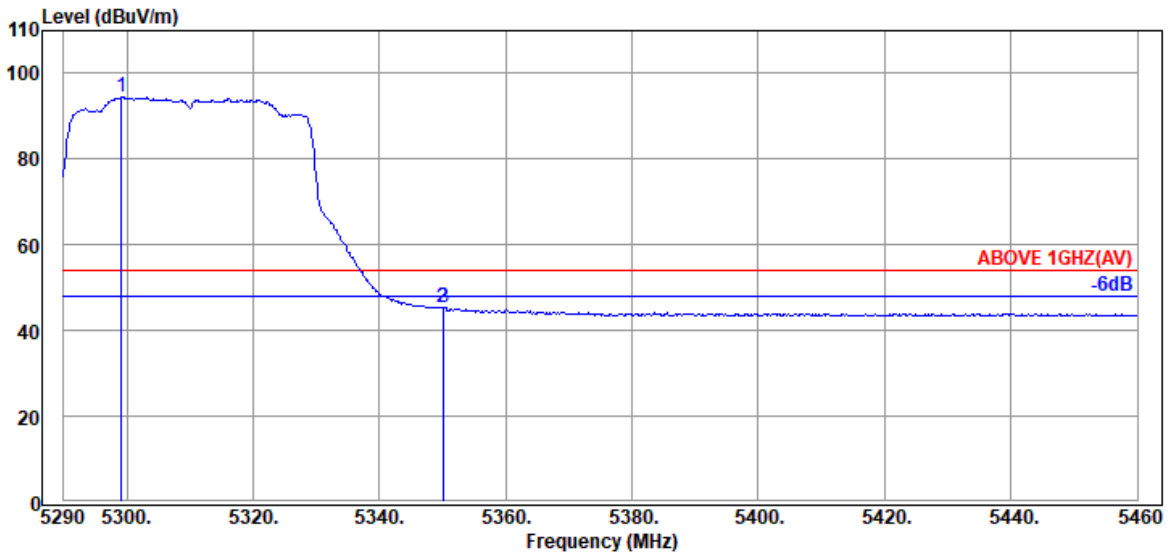


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.180	34.10	8.97	39.28	90.65	94.44	---	---	Average
5350.010	33.90	8.99	39.27	41.70	45.32	54.00	8.68	Average
5350.180	33.90	8.99	39.27	41.76	45.38	54.00	8.62	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

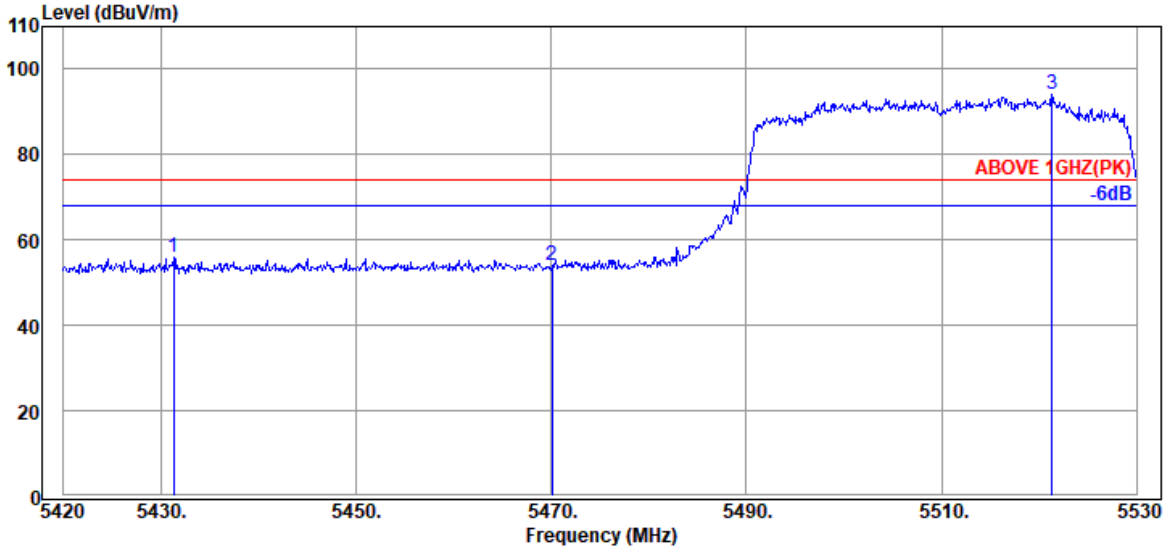

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.330	34.15	9.04	39.27	51.97	55.89	74.00	18.11	Peak
5470.050	34.17	9.06	39.26	49.93	53.90	74.00	20.10	Peak
@ 5521.310	34.10	9.09	39.26	90.22	94.15	---	---	Peak

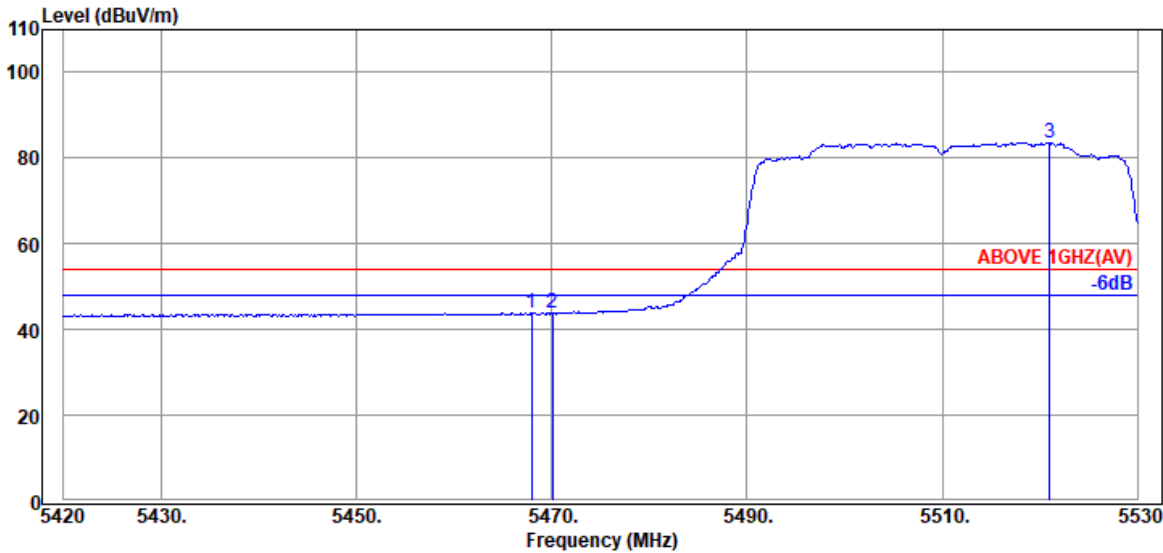


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.960	34.17	9.06	39.26	39.97	43.94	54.00	10.06	Average
5470.050	34.17	9.06	39.26	39.82	43.79	54.00	10.21	Average
@ 5520.980	34.10	9.09	39.26	79.69	83.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

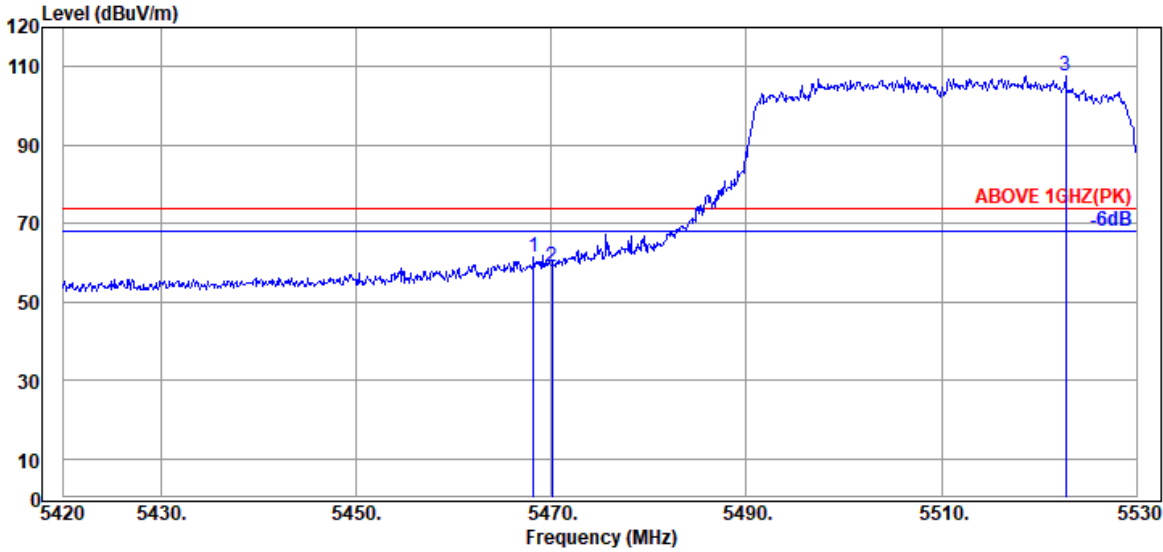

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.180	34.17	9.06	39.26	57.59	61.56	74.00	12.44	Peak
5470.050	34.17	9.06	39.26	55.10	59.07	74.00	14.93	Peak
@ 5522.740	34.10	9.09	39.26	103.52	107.45	---	---	Peak

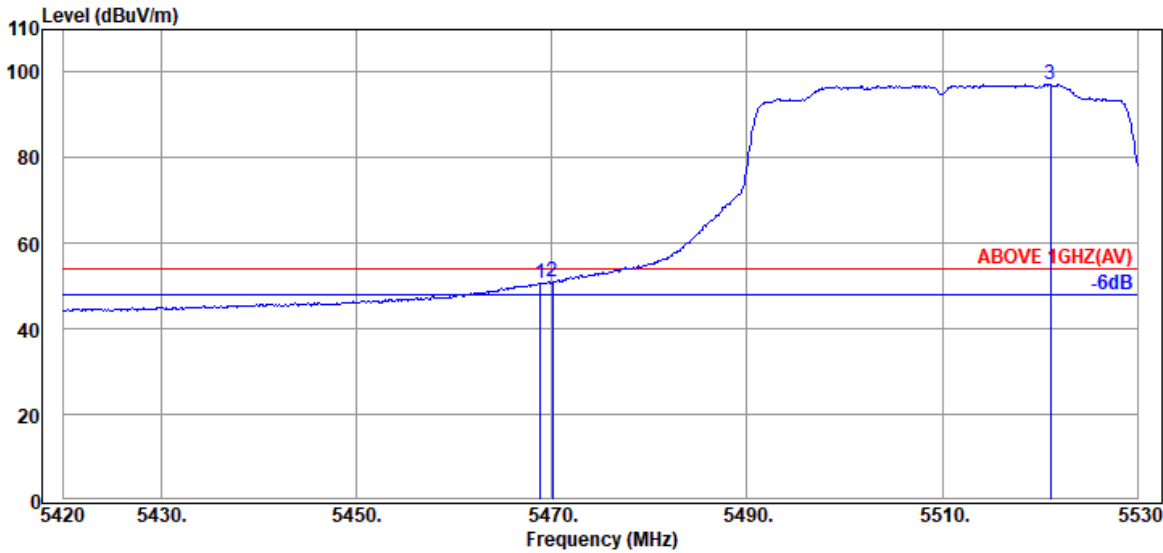


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.840	34.17	9.06	39.26	46.83	50.80	54.00	3.20	Average
5470.050	34.17	9.06	39.26	47.14	51.11	54.00	2.89	Average
@ 5521.090	34.10	9.09	39.26	93.16	97.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

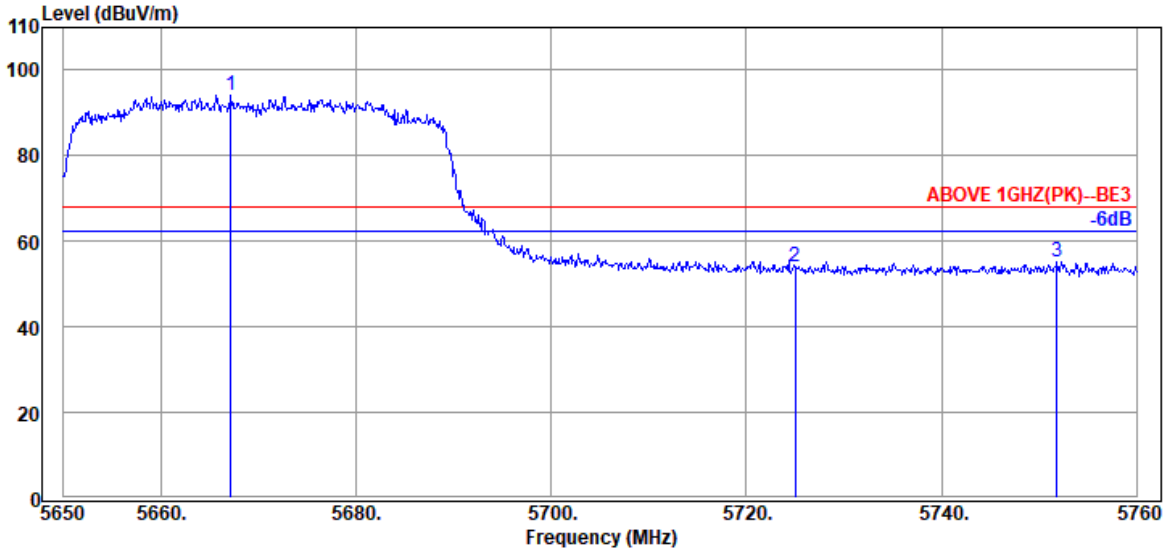

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5667.160	33.93	9.16	39.29	90.36	94.16	---	---	Peak
5725.020	33.80	9.20	39.30	50.54	54.24	68.20	13.96	Peak
5751.860	33.80	9.20	39.31	51.69	55.38	68.20	12.82	Peak

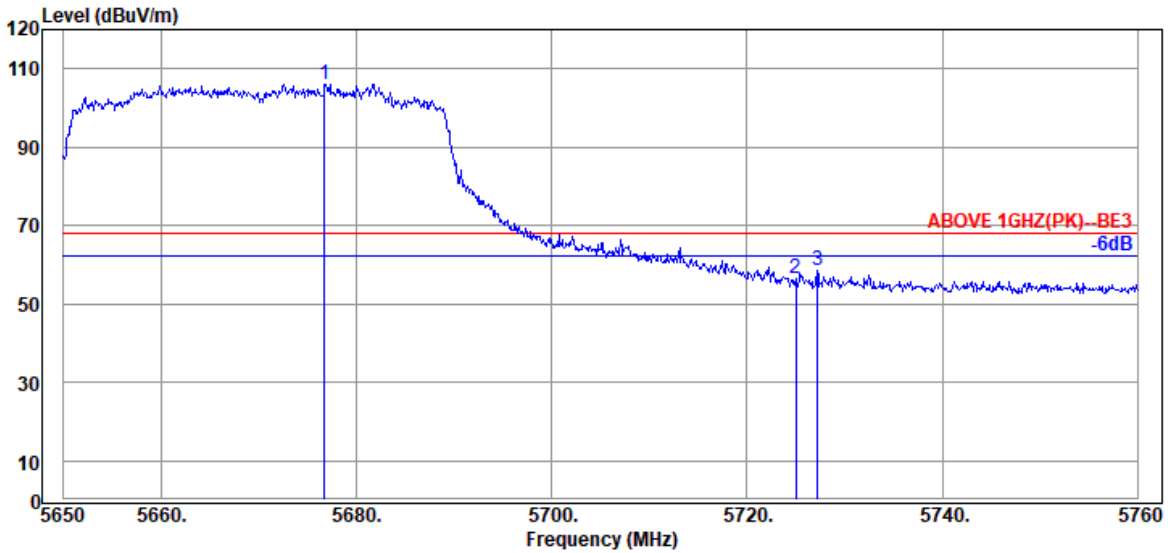


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5676.730	33.87	9.17	39.30	102.22	105.96	---	---	Peak
5725.020	33.80	9.20	39.30	52.65	56.35	68.20	11.85	Peak
5727.220	33.80	9.20	39.31	54.95	58.64	68.20	9.56	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

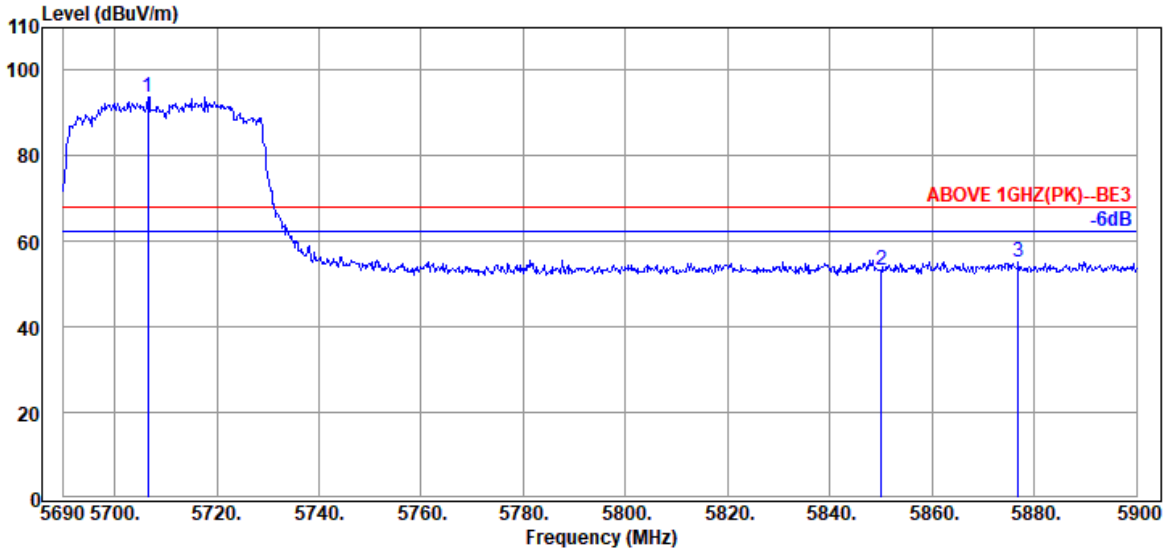

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.590	33.80	9.19	39.30	90.11	93.80	---	---	Peak
5850.020	34.10	9.25	39.33	49.38	53.40	68.20	14.80	Peak
5876.900	34.10	9.27	39.33	51.21	55.25	68.20	12.95	Peak

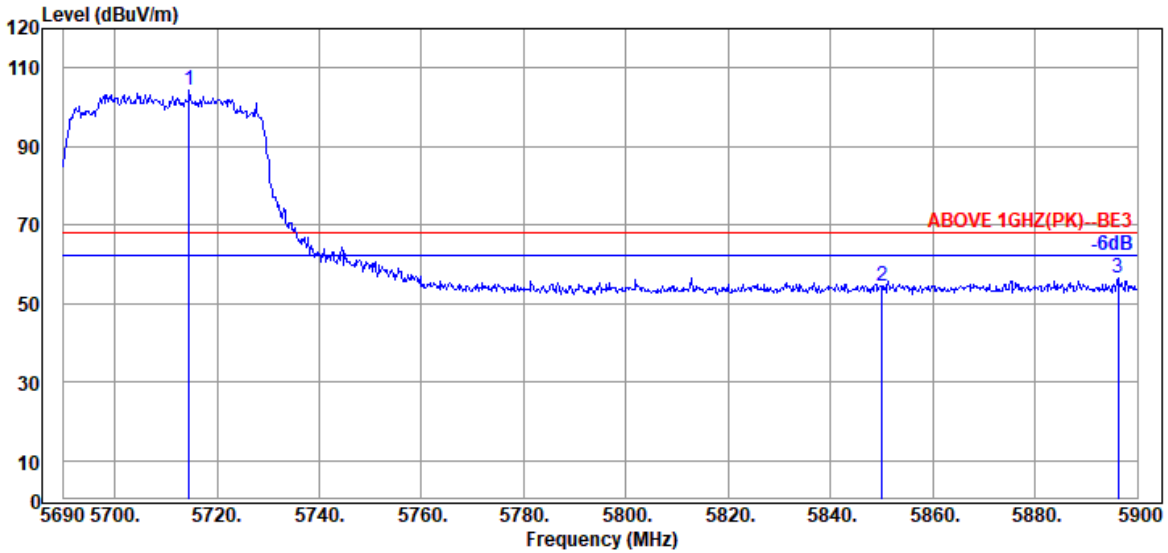


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.570	33.80	9.19	39.30	100.68	104.37	---	---	Peak
5850.020	34.10	9.25	39.33	50.58	54.60	68.20	13.60	Peak
5896.220	34.10	9.28	39.34	52.33	56.37	68.20	11.83	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

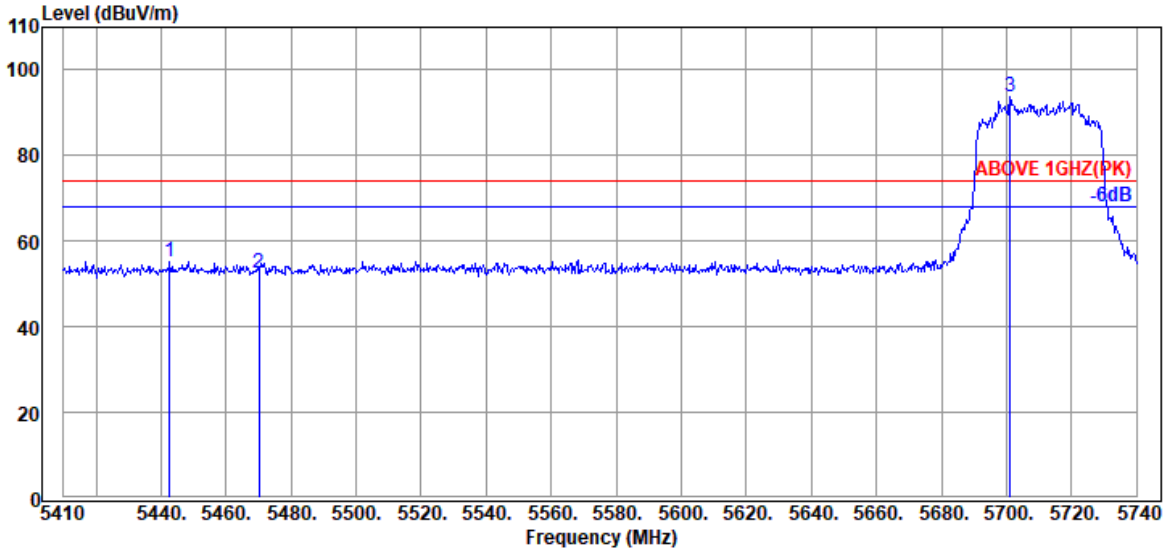

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5442.670	34.17	9.04	39.26	51.32	55.27	74.00	18.73	Peak
5470.060	34.17	9.06	39.26	48.63	52.60	74.00	21.40	Peak
@ 5701.060	33.80	9.18	39.30	89.90	93.58	---	---	Peak

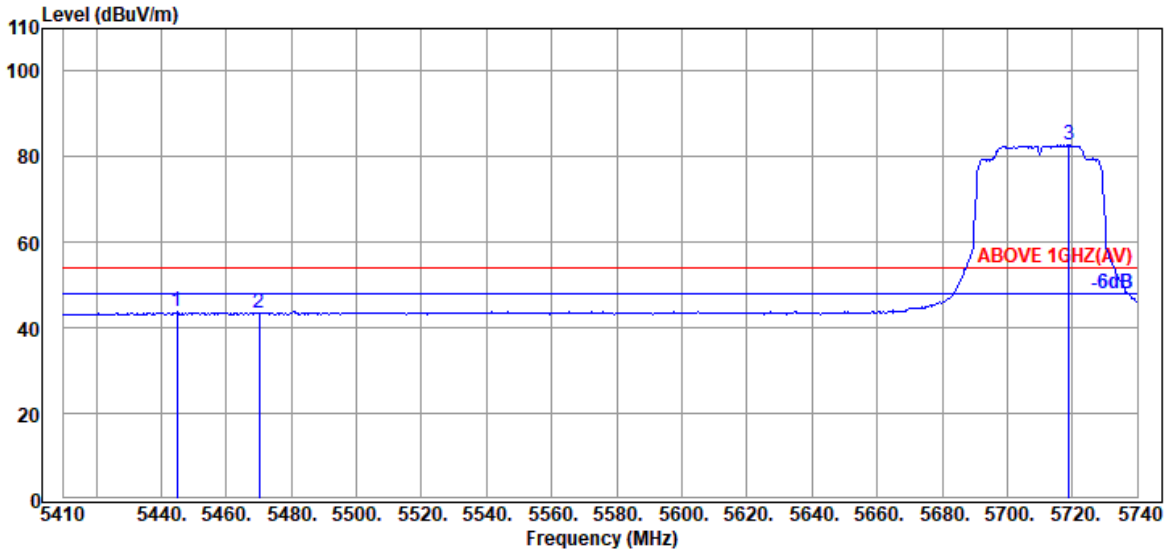


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5444.980	34.17	9.04	39.26	39.71	43.66	54.00	10.34	Average
5470.060	34.17	9.06	39.26	39.32	43.29	54.00	10.71	Average
@ 5718.880	33.80	9.19	39.30	79.05	82.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

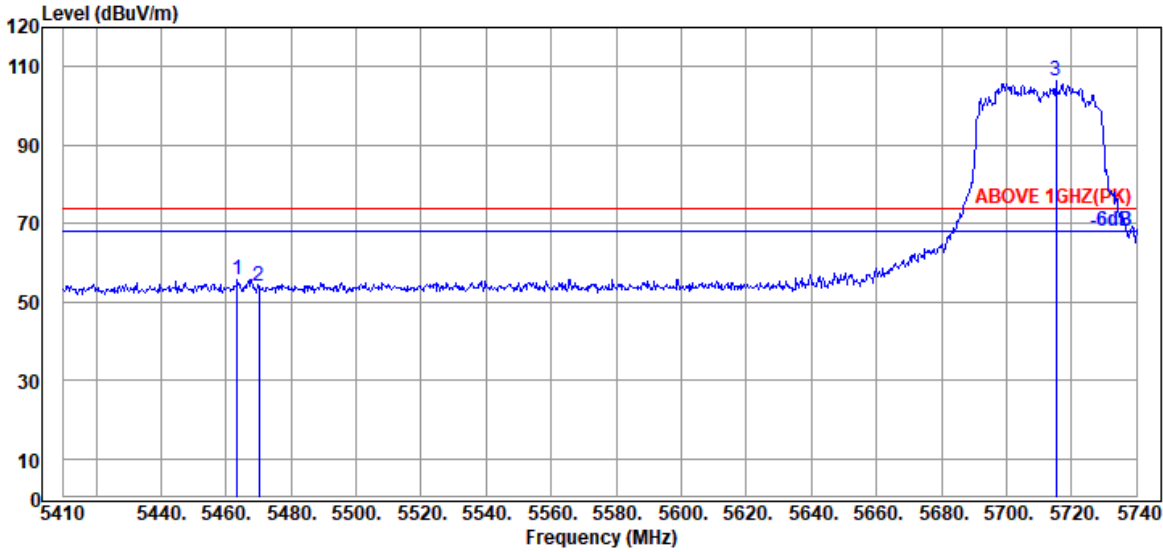

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.460	34.20	9.05	39.26	51.82	55.81	74.00	18.19	Peak
5470.060	34.17	9.06	39.26	49.85	53.82	74.00	20.18	Peak
@ 5715.250	33.80	9.19	39.30	102.84	106.53	---	---	Peak

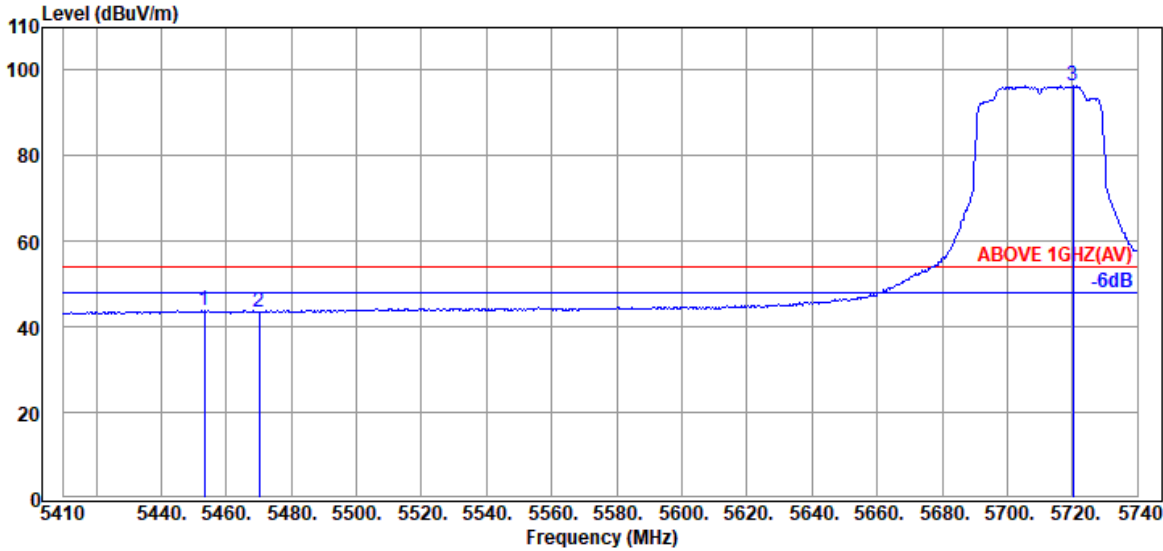


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.230	34.20	9.05	39.26	39.76	43.75	54.00	10.25	Average
5470.060	34.17	9.06	39.26	39.61	43.58	54.00	10.42	Average
@ 5720.200	33.80	9.19	39.30	92.63	96.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

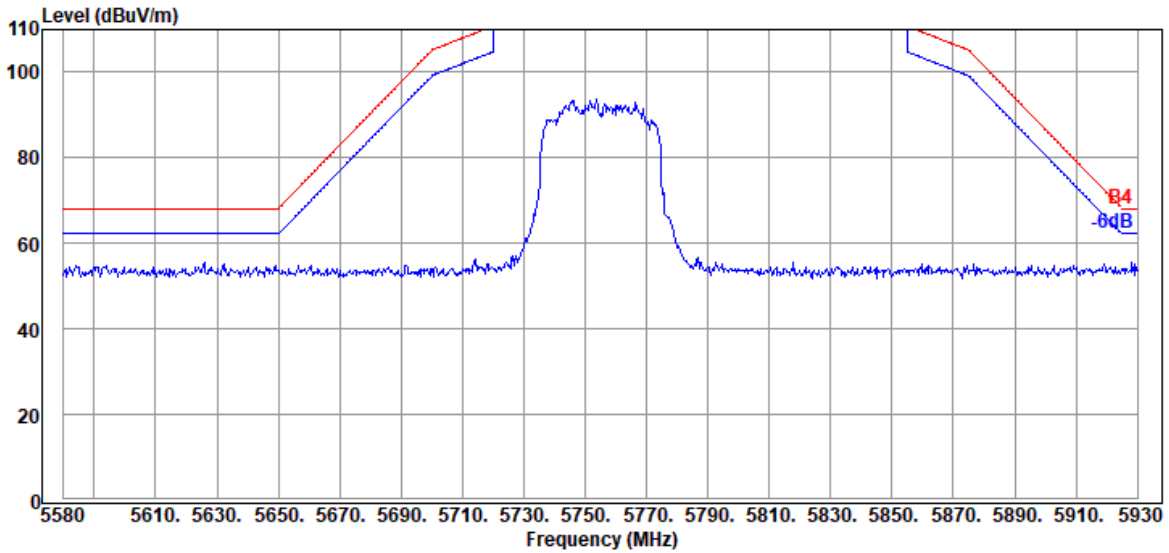


Antenna at Vertical Polarization

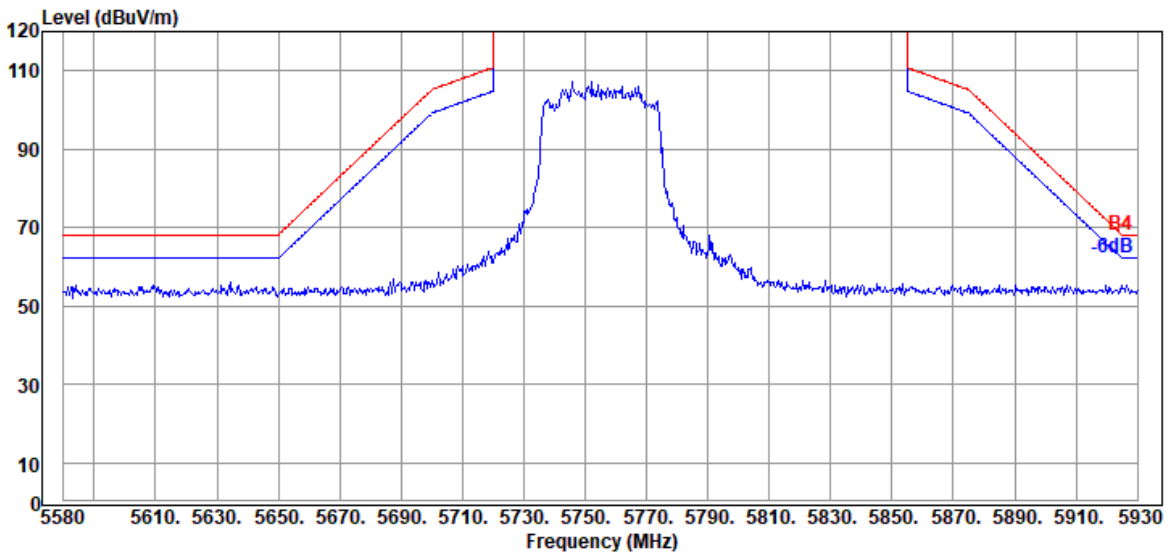


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

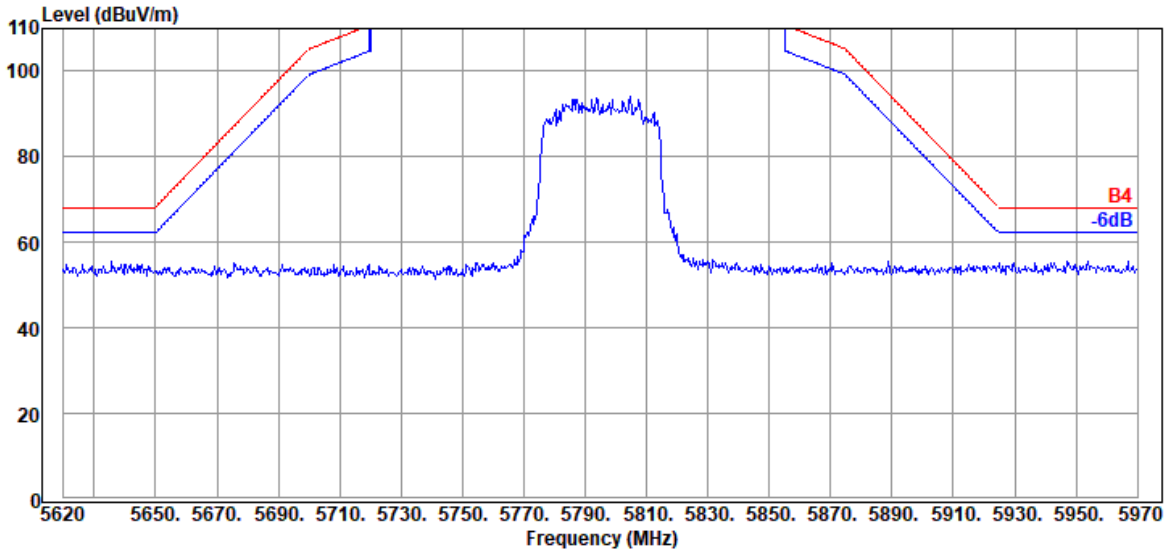

Antenna at Vertical Polarization

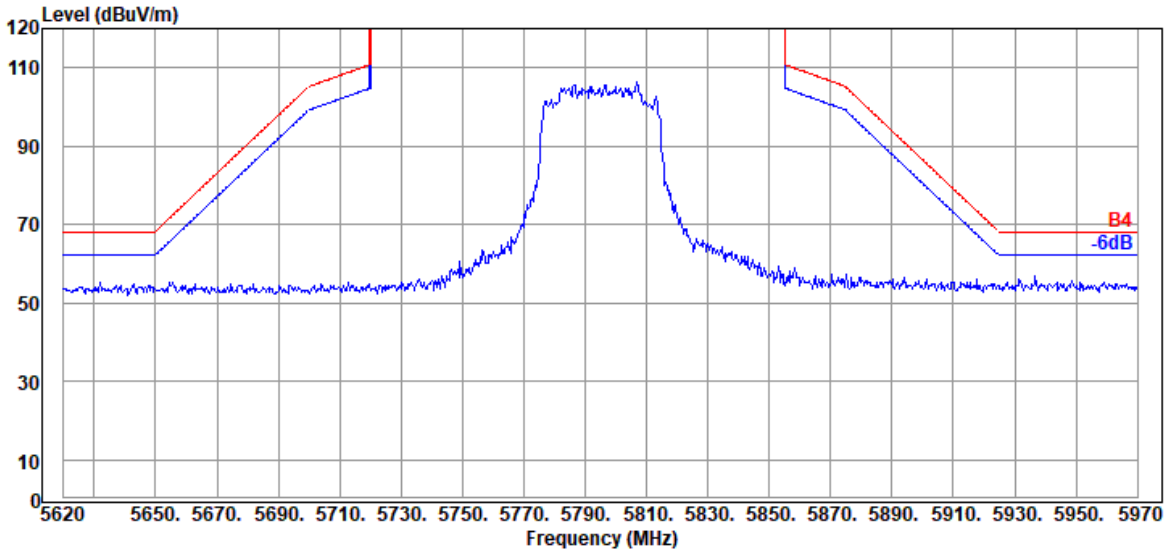


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

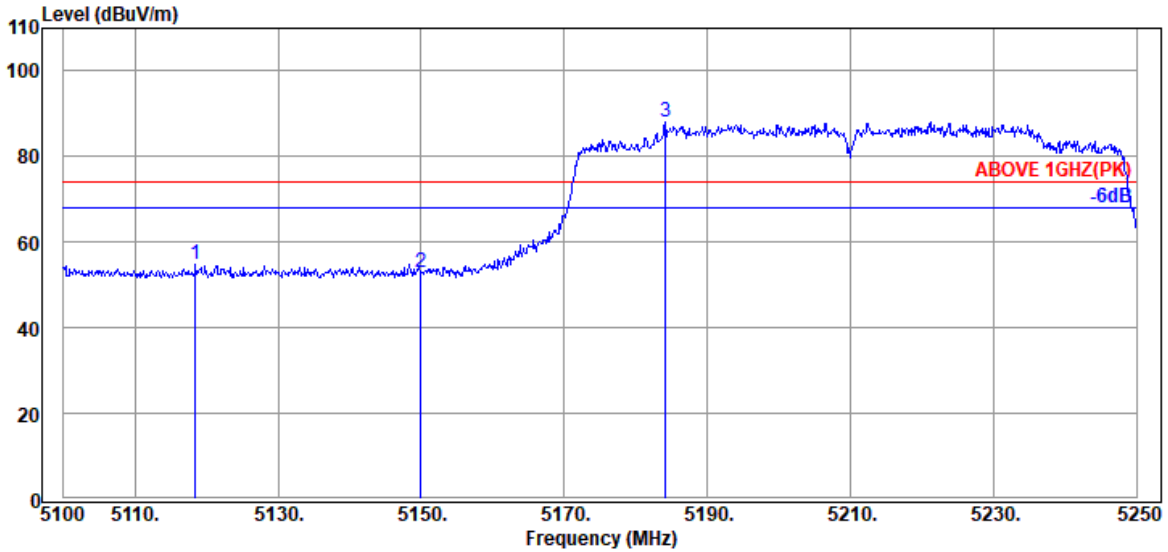

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.450	33.70	8.87	39.29	51.52	54.80	74.00	19.20	Peak
5149.950	33.70	8.88	39.29	49.57	52.86	74.00	21.14	Peak
@ 5184.150	33.70	8.90	39.28	84.71	88.03	---	---	Peak

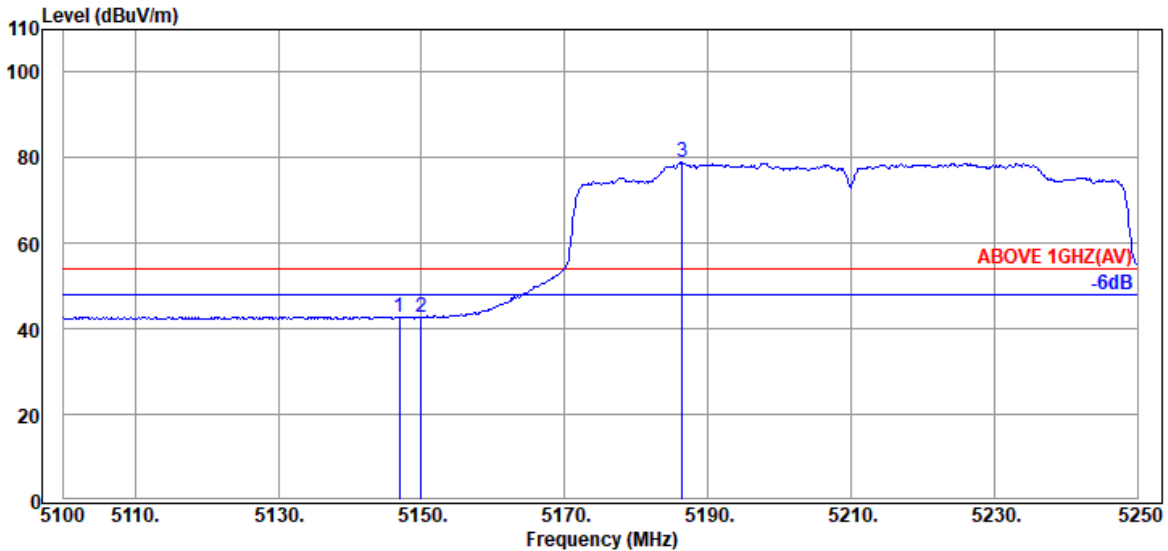


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.950	33.70	8.88	39.29	39.60	42.89	54.00	11.11	Average
5149.950	33.70	8.88	39.29	39.32	42.61	54.00	11.39	Average
@ 5186.400	33.70	8.90	39.28	75.54	78.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

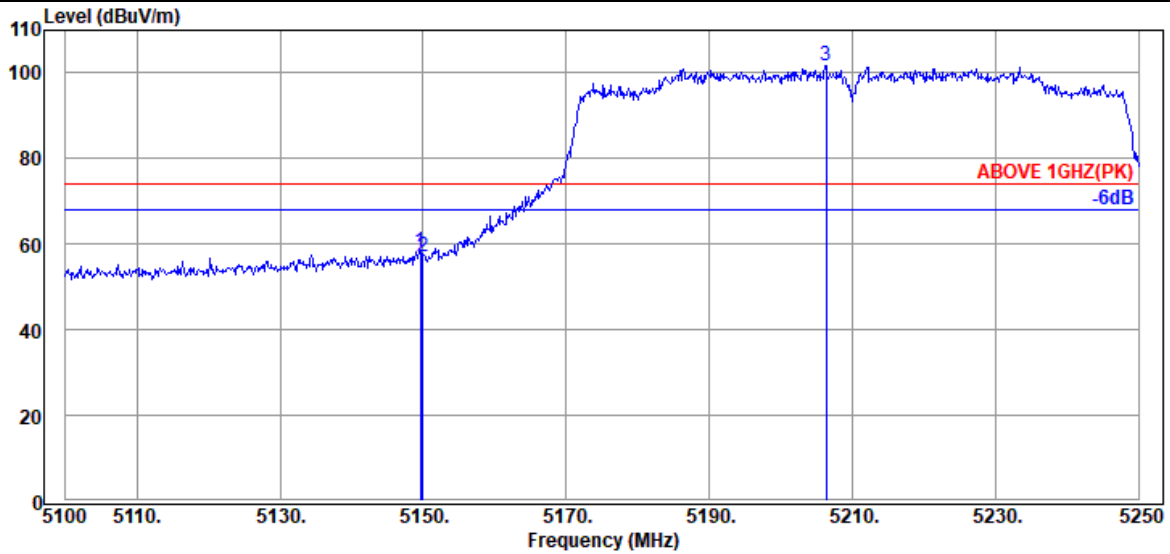

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.70	8.88	39.29	54.85	58.14	74.00	15.86	Peak
5149.950	33.70	8.88	39.29	53.93	57.22	74.00	16.78	Peak
@ 5206.350	33.72	8.92	39.28	98.34	101.70	---	---	Peak

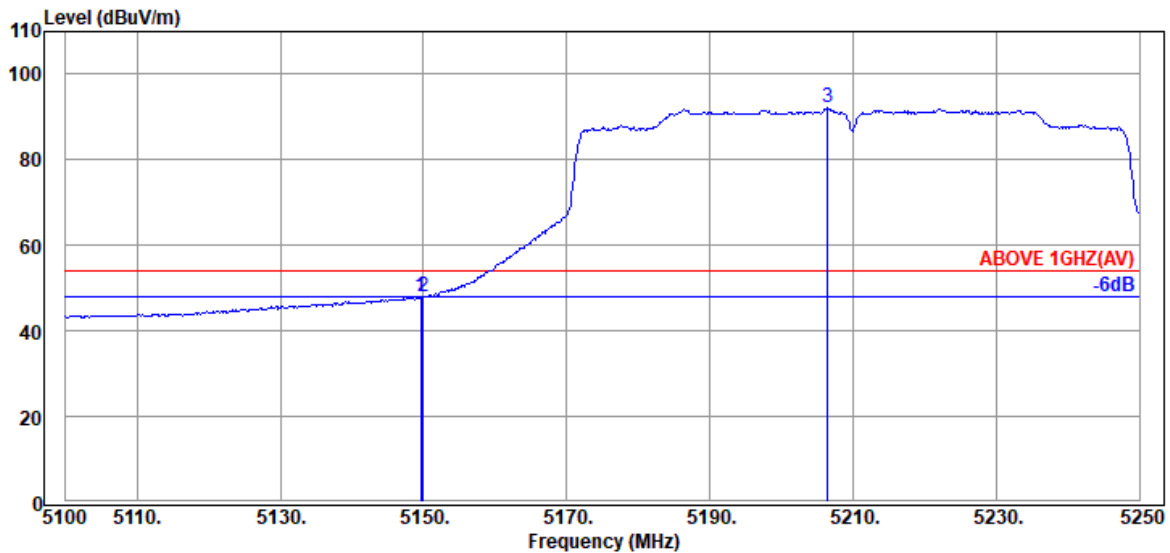


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.70	8.88	39.29	44.67	47.96	54.00	6.04	Average
5149.950	33.70	8.88	39.29	44.82	48.11	54.00	5.89	Average
@ 5206.500	33.72	8.92	39.28	88.71	92.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

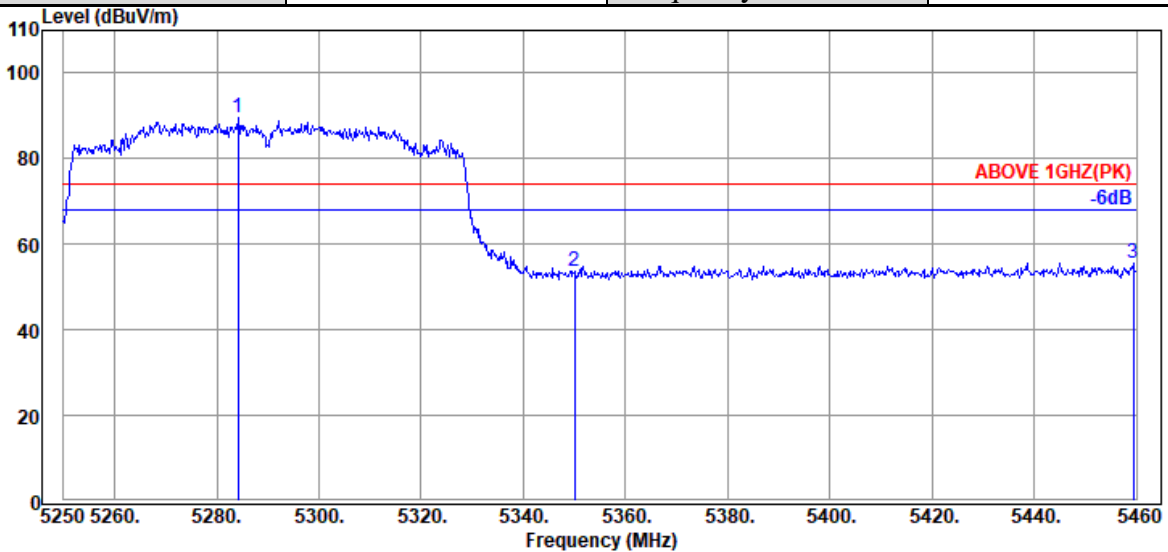

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.230	34.00	8.96	39.28	85.94	89.62	---	---	Peak
5349.960	33.90	8.99	39.27	50.01	53.63	74.00	20.37	Peak
5459.370	34.20	9.05	39.26	51.66	55.65	74.00	18.35	Peak

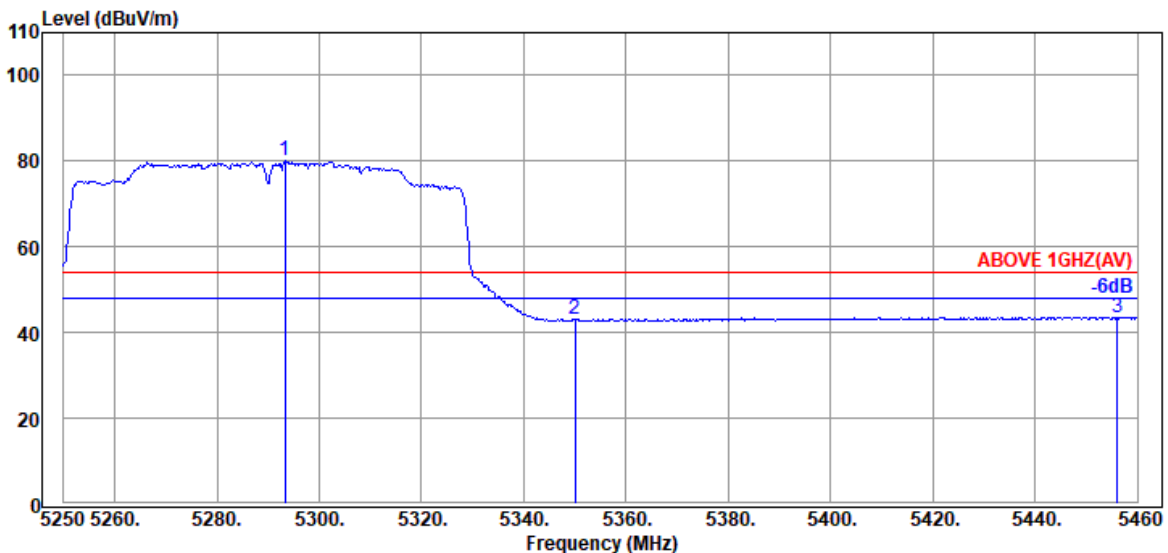


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.260	34.10	8.97	39.28	76.53	80.32	---	---	Average
5349.960	33.90	8.99	39.27	39.30	42.92	54.00	11.08	Average
5456.010	34.20	9.05	39.26	39.58	43.57	54.00	10.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

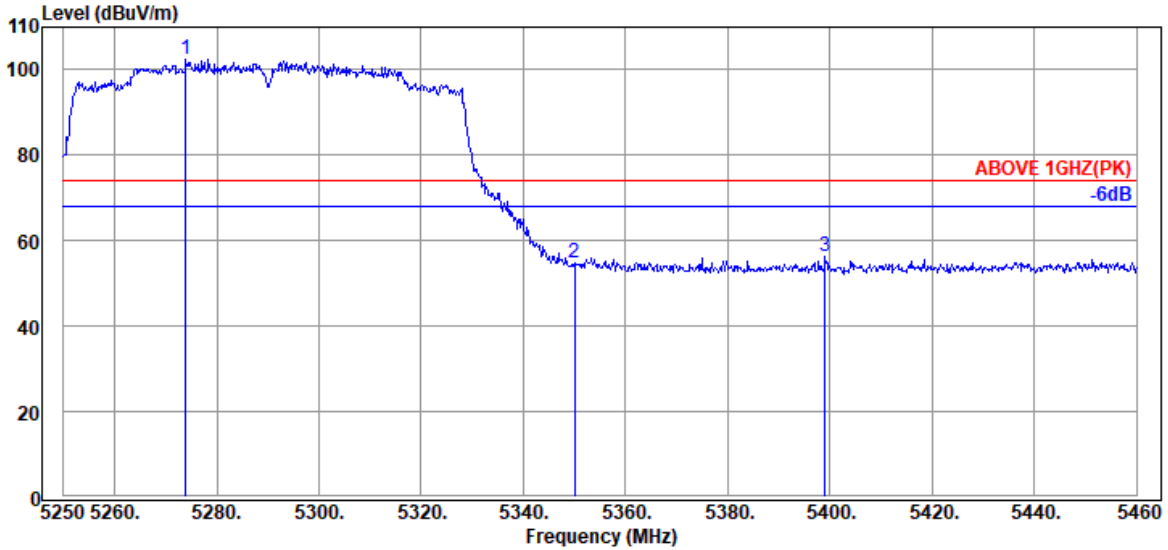

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5273.940	33.90	8.95	39.28	98.98	102.55	---	---	Peak
5349.960	33.90	8.99	39.27	51.12	54.74	74.00	19.26	Peak
5399.100	34.10	9.02	39.27	52.29	56.14	74.00	17.86	Peak

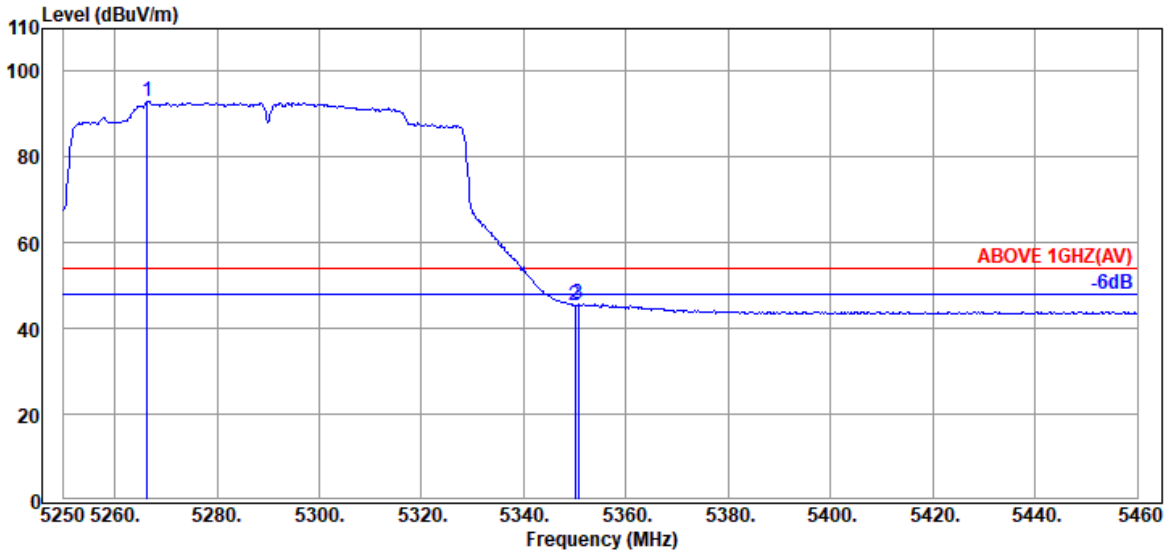


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.380	33.90	8.95	39.28	89.38	92.95	---	---	Average
5349.960	33.90	8.99	39.27	41.73	45.35	54.00	8.65	Average
5350.590	33.90	8.99	39.27	41.99	45.61	54.00	8.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

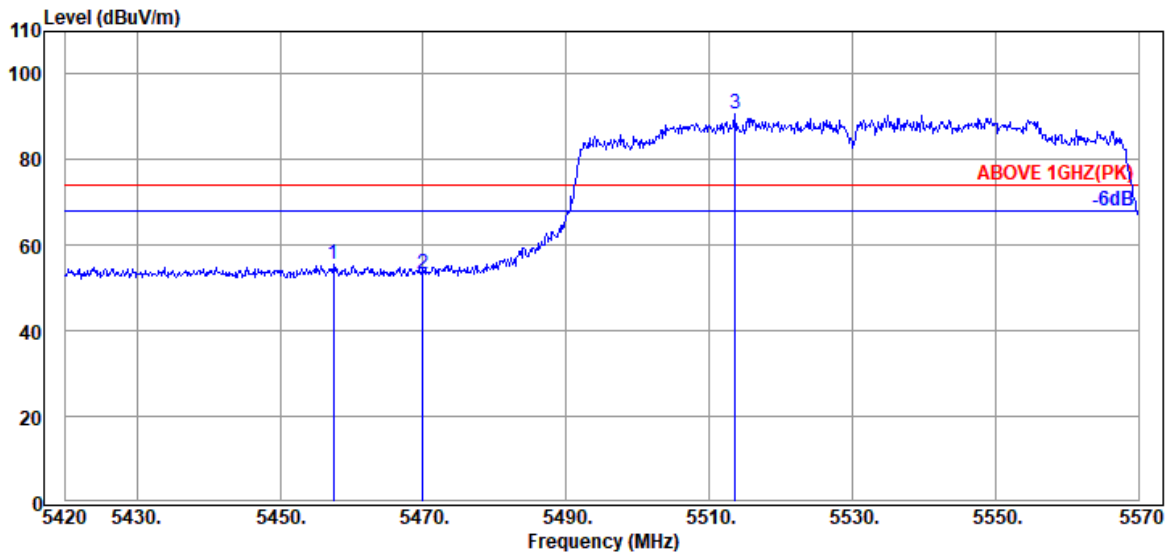

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.20	9.05	39.26	51.71	55.70	74.00	18.30	Peak
5469.950	34.17	9.06	39.26	49.28	53.25	74.00	20.75	Peak
@ 5513.600	34.10	9.09	39.26	86.71	90.64	---	---	Peak

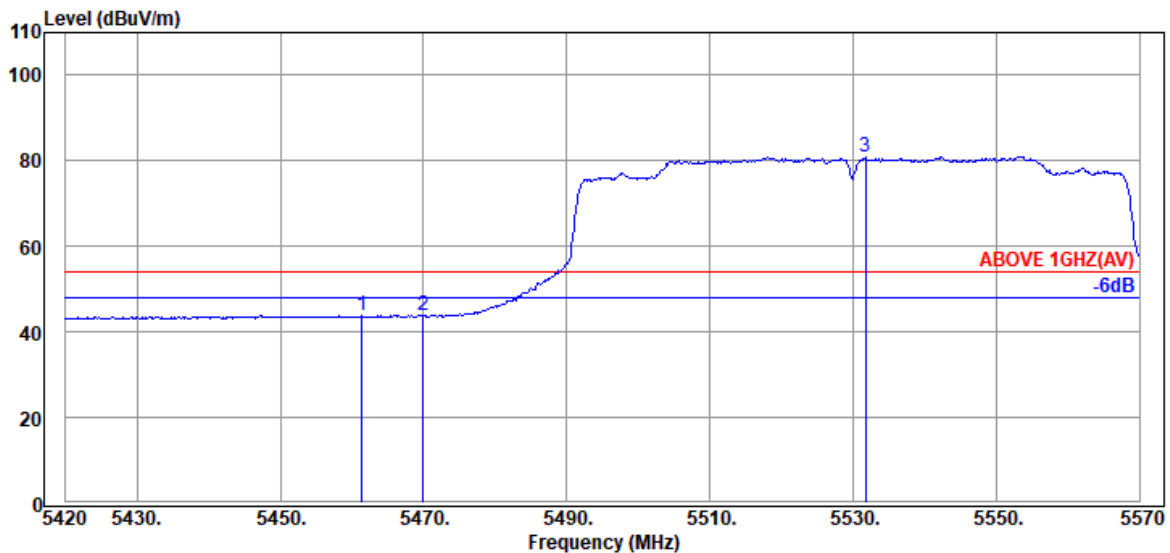


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.400	34.20	9.05	39.26	39.75	43.74	54.00	10.26	Average
5469.950	34.17	9.06	39.26	39.76	43.73	54.00	10.27	Average
@ 5531.750	34.10	9.09	39.27	77.07	80.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

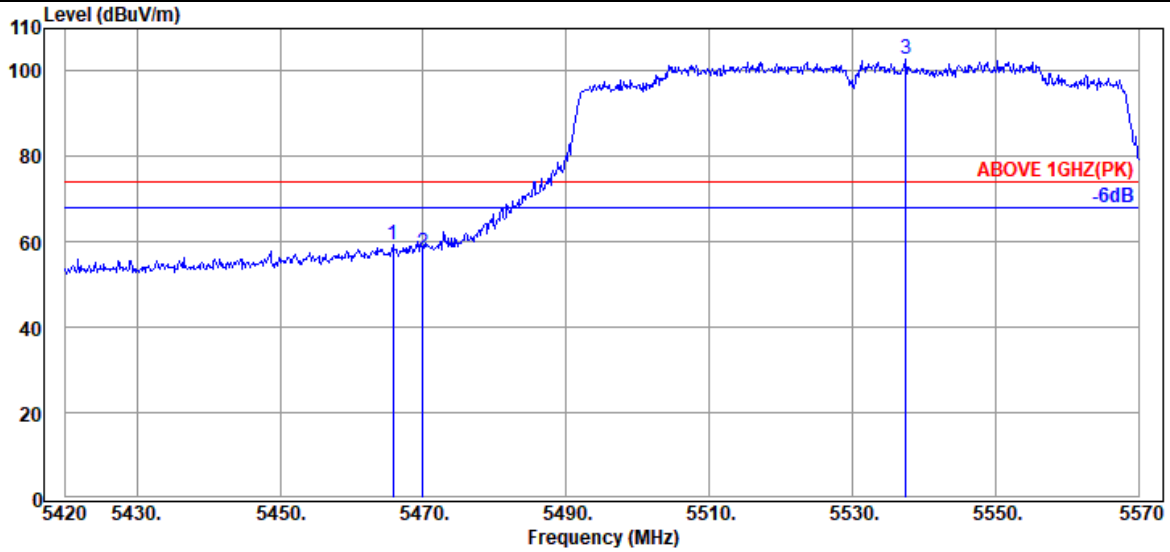

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.750	34.17	9.06	39.26	55.53	59.50	74.00	14.50	Peak
5469.950	34.17	9.06	39.26	53.45	57.42	74.00	16.58	Peak
@ 5537.450	34.10	9.09	39.27	98.77	102.69	---	---	Peak

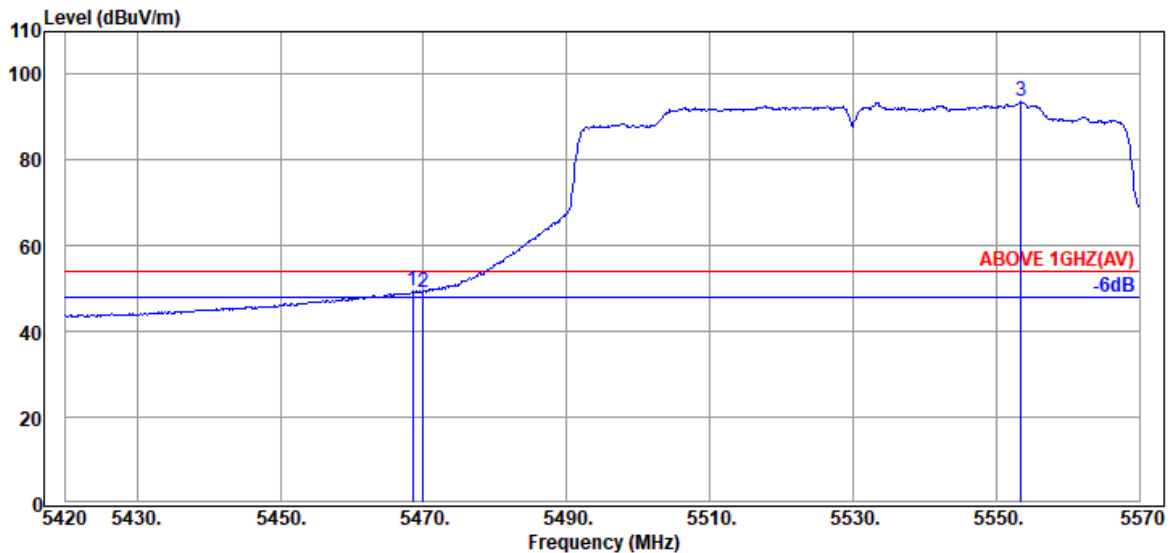


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.450	34.17	9.06	39.26	45.36	49.33	54.00	4.67	Average
5469.950	34.17	9.06	39.26	45.35	49.32	54.00	4.68	Average
@ 5553.500	34.10	9.10	39.27	89.74	93.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

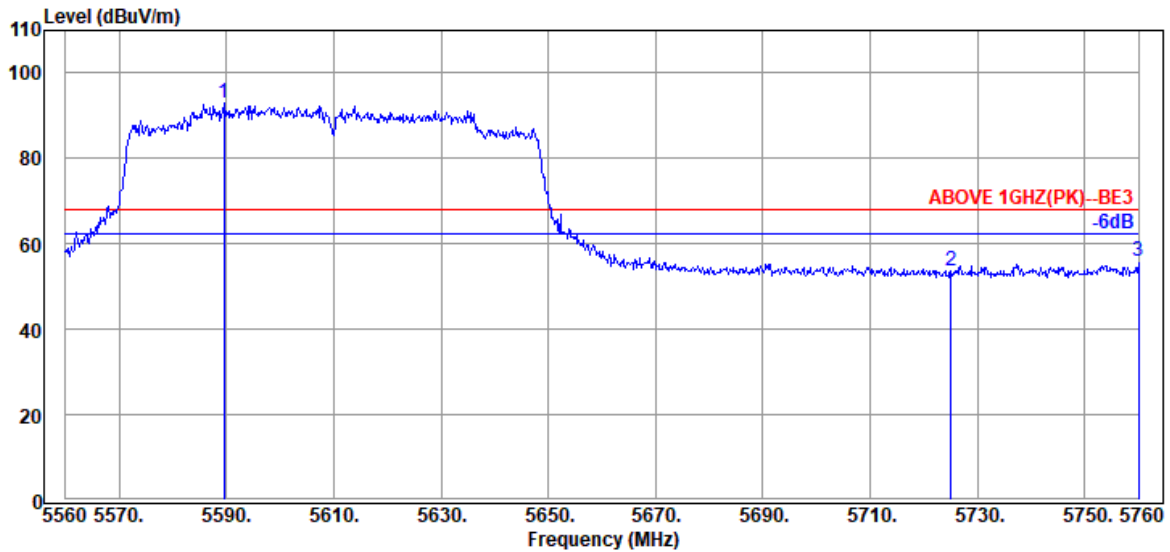

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5589.600	34.03	9.12	39.28	89.26	93.13	---	---	Peak
5725.000	33.80	9.20	39.30	49.85	53.55	68.20	14.65	Peak
5760.000	33.87	9.21	39.31	52.03	55.80	68.20	12.40	Peak

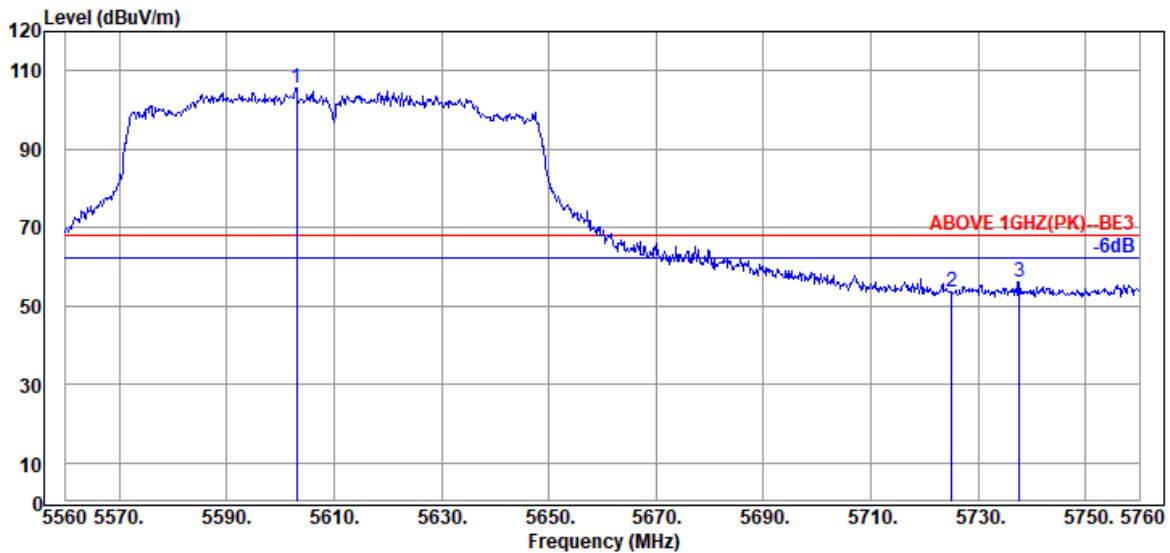


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5603.000	34.00	9.13	39.28	101.66	105.51	---	---	Peak
5725.000	33.80	9.20	39.30	50.10	53.80	68.20	14.40	Peak
5737.600	33.80	9.20	39.31	52.35	56.04	68.20	12.16	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

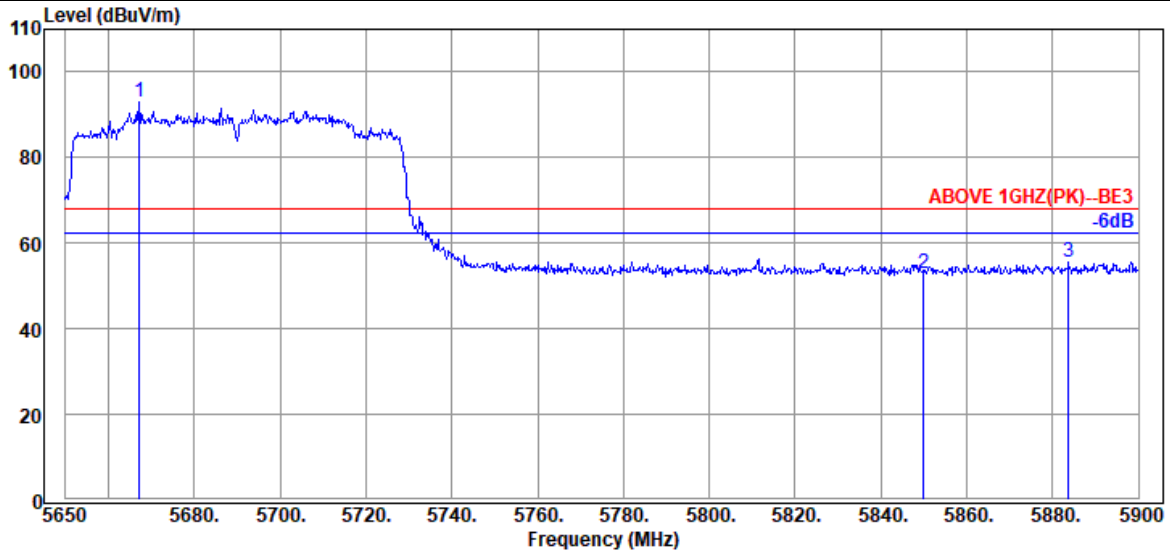

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5667.250	33.93	9.16	39.29	89.12	92.92	---	---	Peak
5850.000	34.10	9.25	39.33	48.95	52.97	68.20	15.23	Peak
5883.750	34.10	9.27	39.34	51.41	55.44	68.20	12.76	Peak

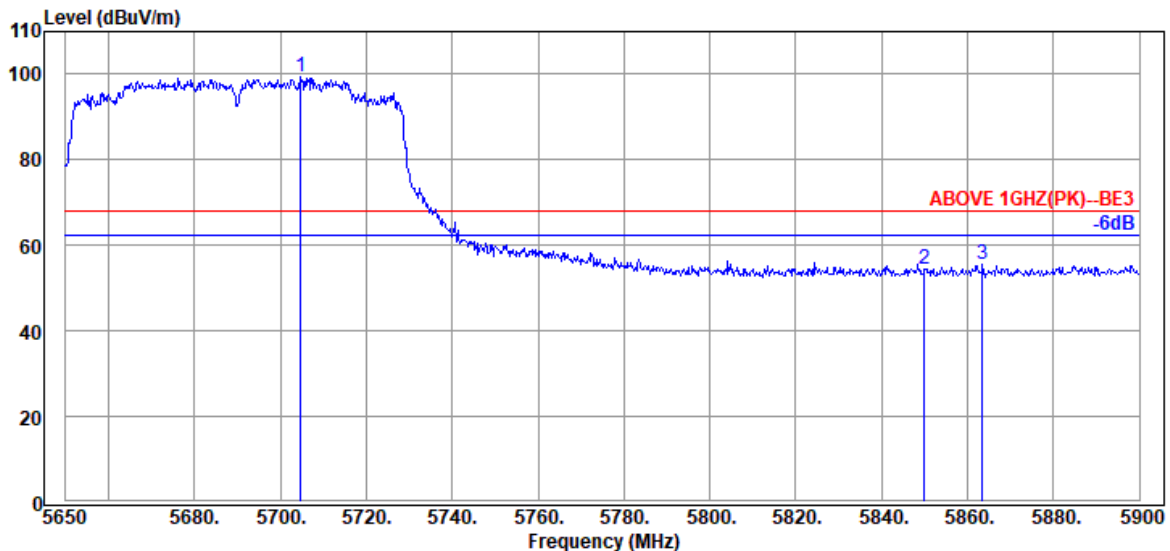


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.750	33.80	9.18	39.30	95.75	99.43	---	---	Peak
5850.000	34.10	9.25	39.33	50.31	54.33	68.20	13.87	Peak
5863.500	34.10	9.26	39.33	51.66	55.69	68.20	12.51	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

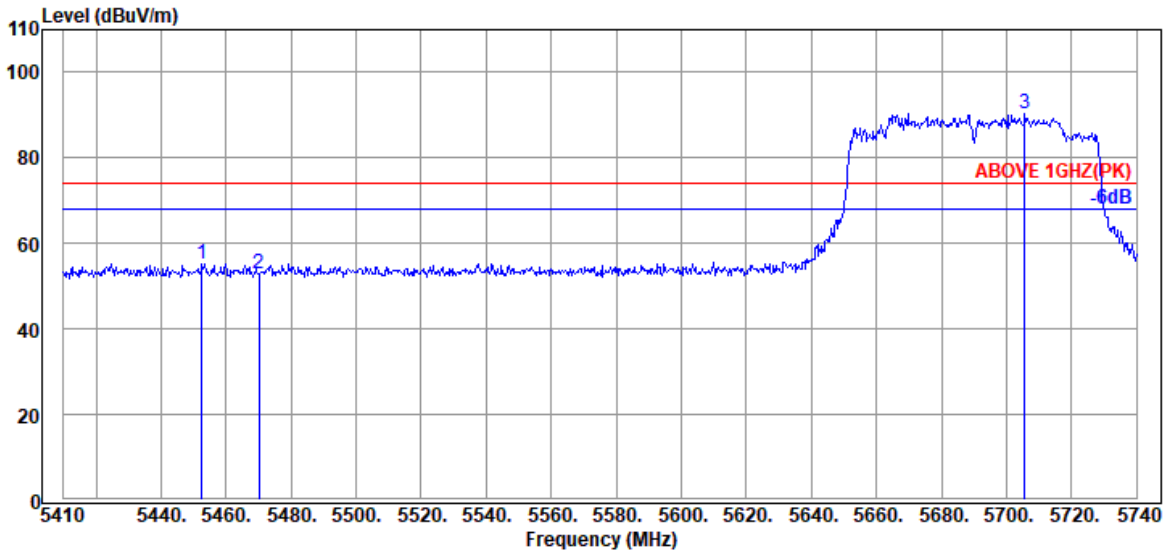

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.570	34.20	9.05	39.26	51.06	55.05	74.00	18.95	Peak
5470.060	34.17	9.06	39.26	48.94	52.91	74.00	21.09	Peak
@ 5705.680	33.80	9.19	39.30	86.60	90.29	---	---	Peak

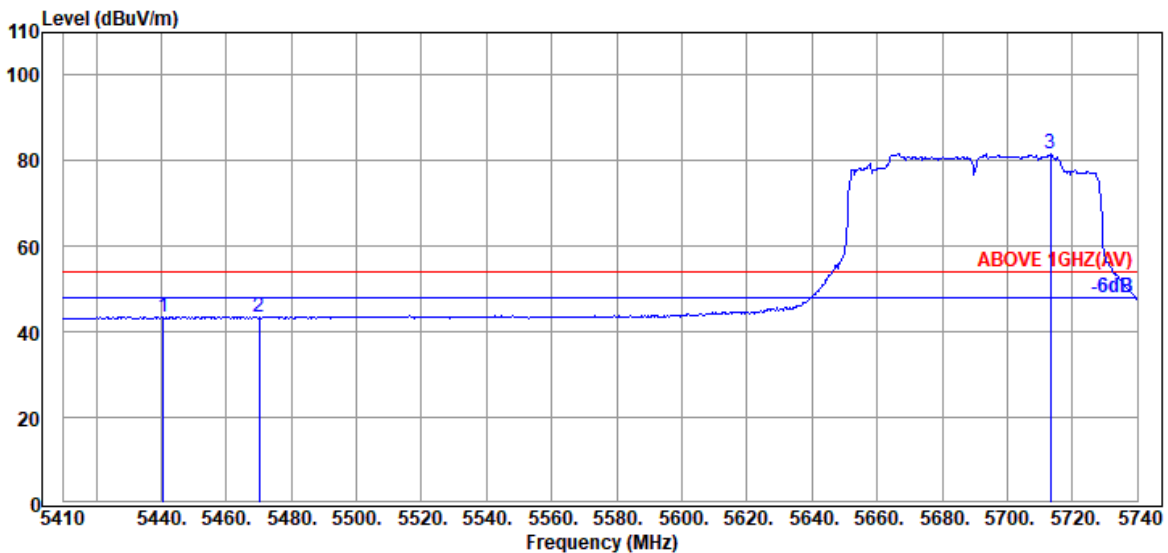


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.690	34.17	9.04	39.26	39.61	43.56	54.00	10.44	Average
5470.060	34.17	9.06	39.26	39.34	43.31	54.00	10.69	Average
@ 5713.270	33.80	9.19	39.30	77.95	81.64	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

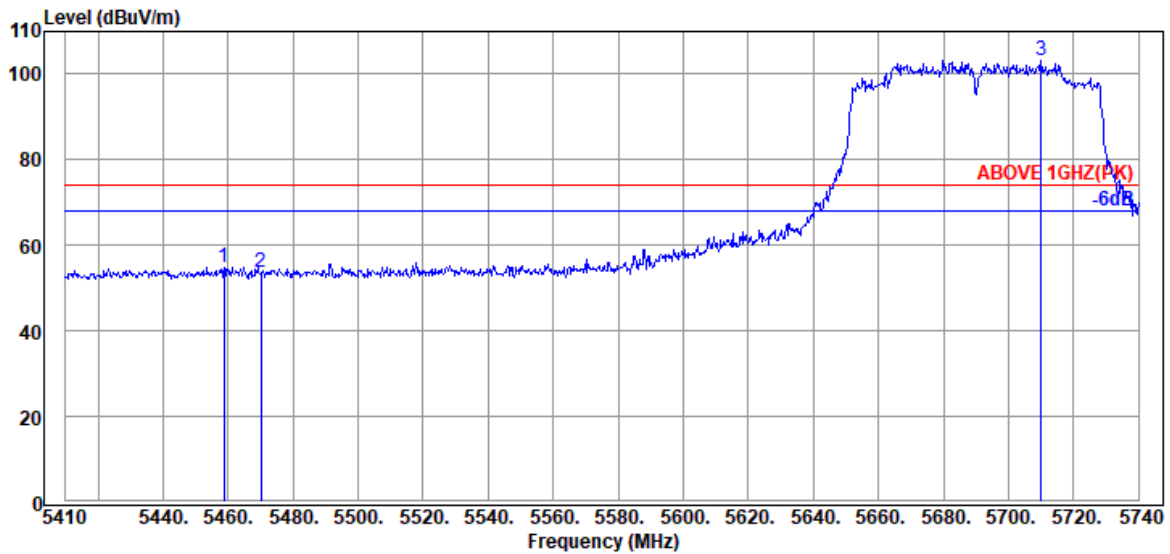

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.840	34.20	9.05	39.26	50.89	54.88	74.00	19.12	Peak
5470.060	34.17	9.06	39.26	49.78	53.75	74.00	20.25	Peak
@ 5709.970	33.80	9.19	39.30	99.51	103.20	---	---	Peak

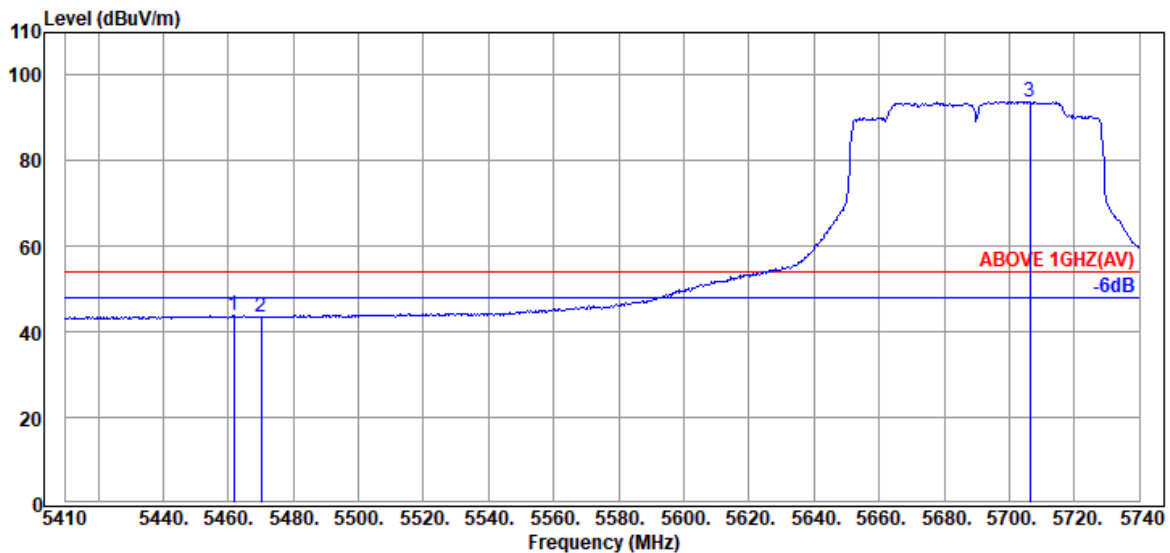


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.810	34.20	9.05	39.26	39.75	43.74	54.00	10.26	Average
5470.060	34.17	9.06	39.26	39.40	43.37	54.00	10.63	Average
@ 5706.340	33.80	9.19	39.30	90.17	93.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

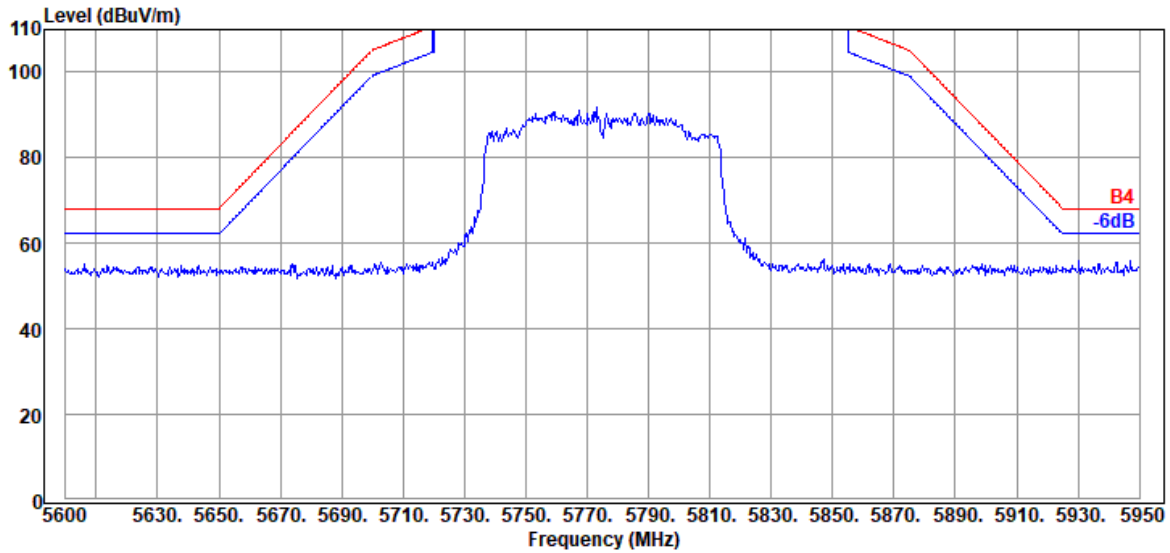

Antenna at Vertical Polarization

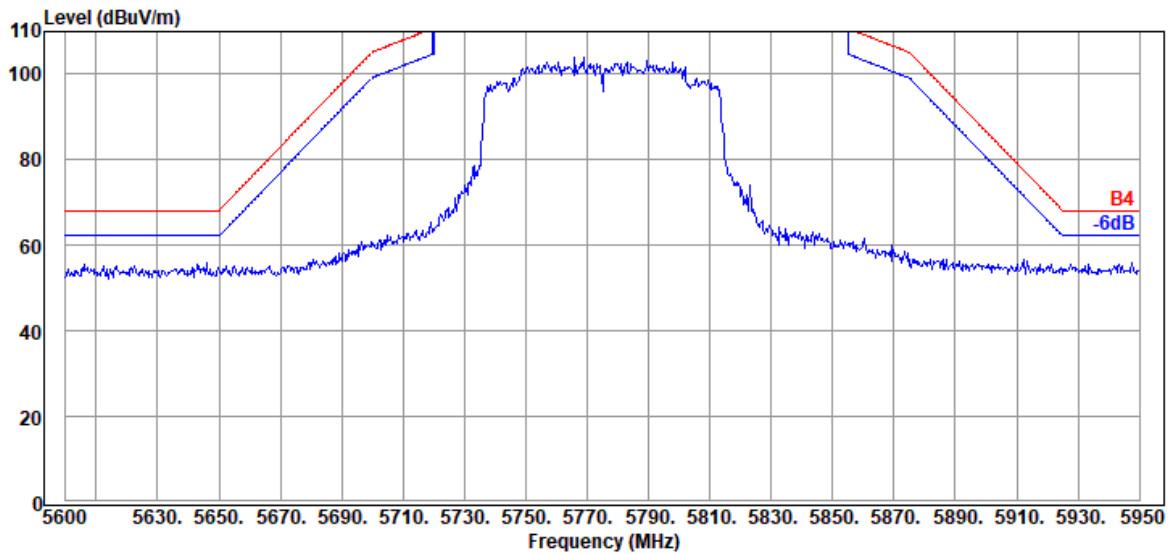


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

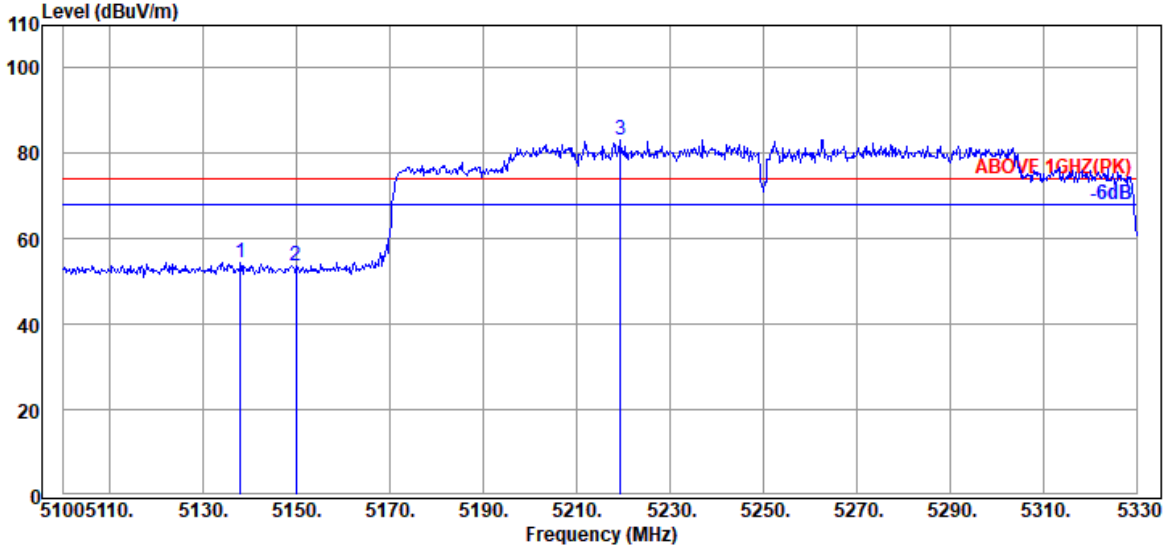

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.950	33.70	8.88	39.29	51.16	54.45	74.00	19.55	Peak
5149.910	33.70	8.88	39.29	50.30	53.59	74.00	20.41	Peak
@ 5219.370	33.75	8.93	39.28	79.66	83.06	---	---	Peak

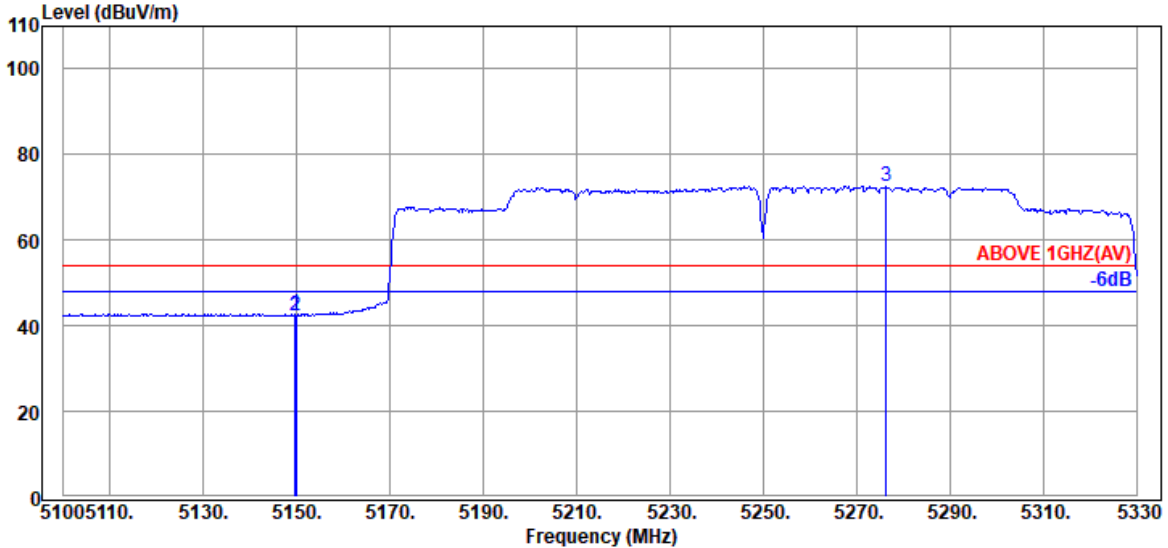


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	33.70	8.88	39.29	39.45	42.74	54.00	11.26	Average
5149.910	33.70	8.88	39.29	39.15	42.44	54.00	11.56	Average
@ 5276.410	33.90	8.95	39.28	69.07	72.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

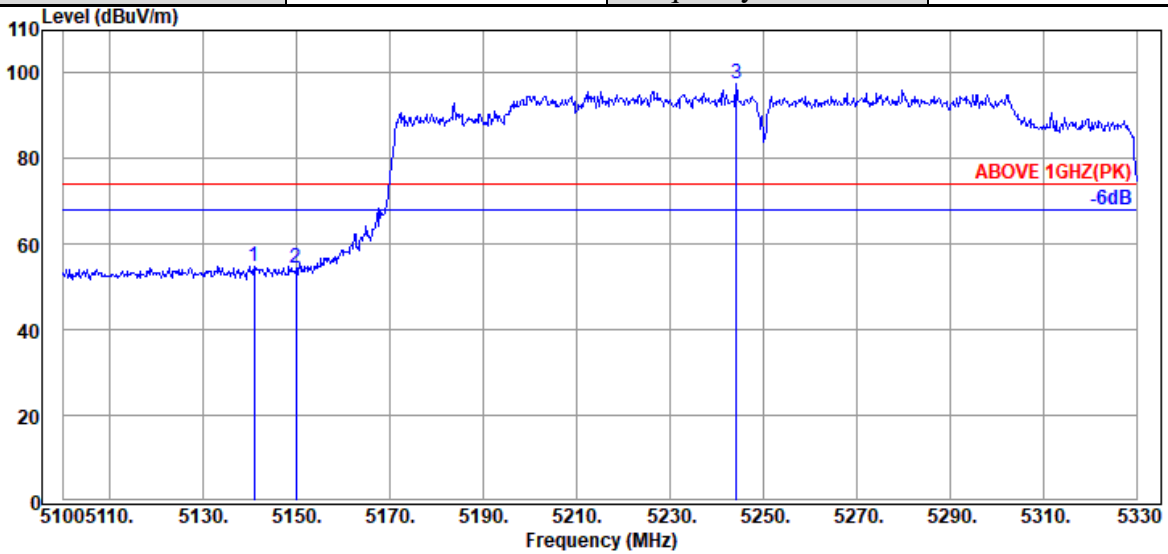

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.940	33.70	8.88	39.29	51.62	54.91	74.00	19.09	Peak
5149.910	33.70	8.88	39.29	50.97	54.26	74.00	19.74	Peak
@ 5244.210	33.78	8.93	39.28	94.08	97.51	---	---	Peak

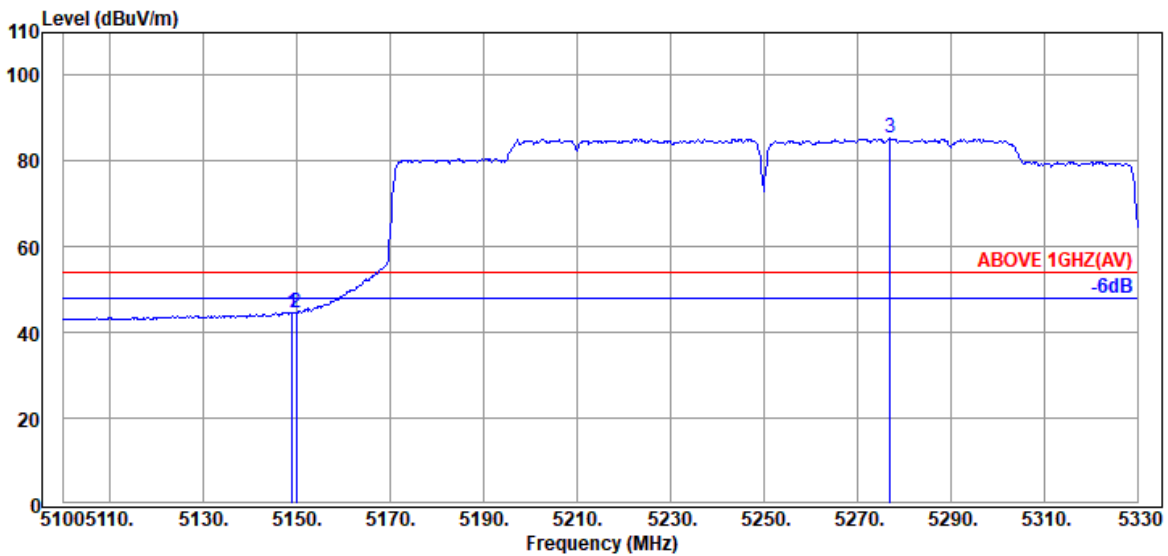


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	33.70	8.88	39.29	41.34	44.63	54.00	9.37	Average
5149.910	33.70	8.88	39.29	41.34	44.63	54.00	9.37	Average
@ 5277.100	33.90	8.95	39.28	81.68	85.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

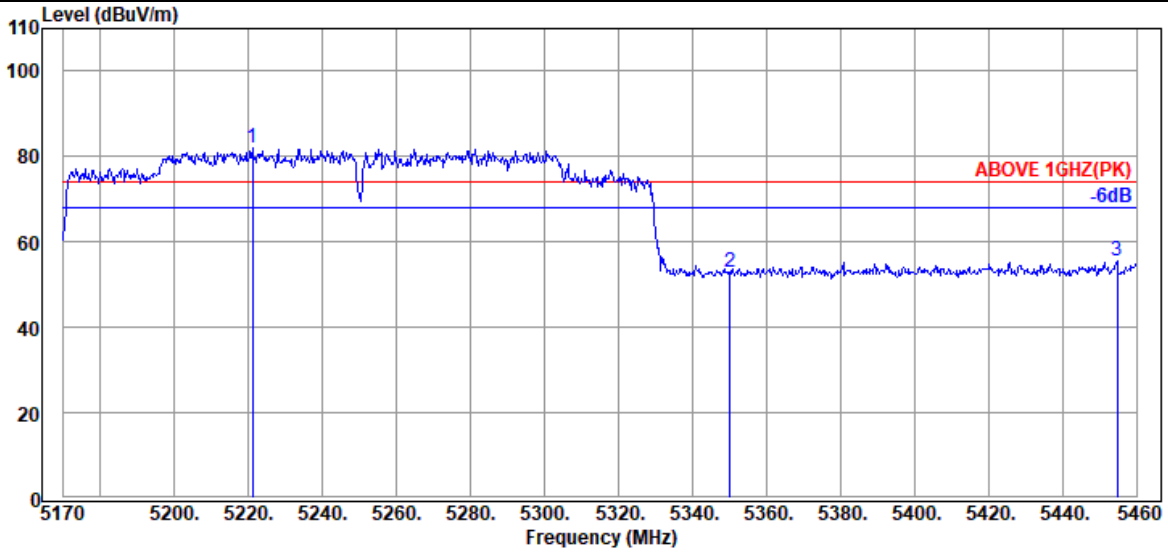

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5221.040	33.75	8.93	39.28	78.45	81.85	---	---	Peak
5350.090	33.90	8.99	39.27	49.33	52.95	74.00	21.05	Peak
5454.780	34.20	9.05	39.26	51.52	55.51	74.00	18.49	Peak

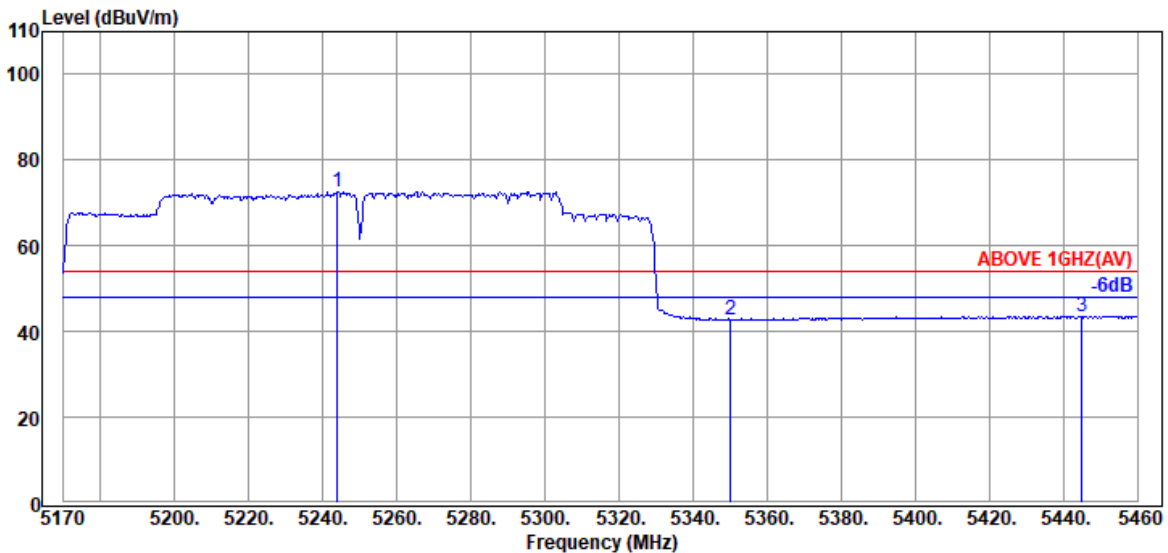


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5243.950	33.78	8.93	39.28	69.11	72.54	---	---	Average
5350.090	33.90	8.99	39.27	39.18	42.80	54.00	11.20	Average
5444.920	34.17	9.04	39.26	39.62	43.57	54.00	10.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

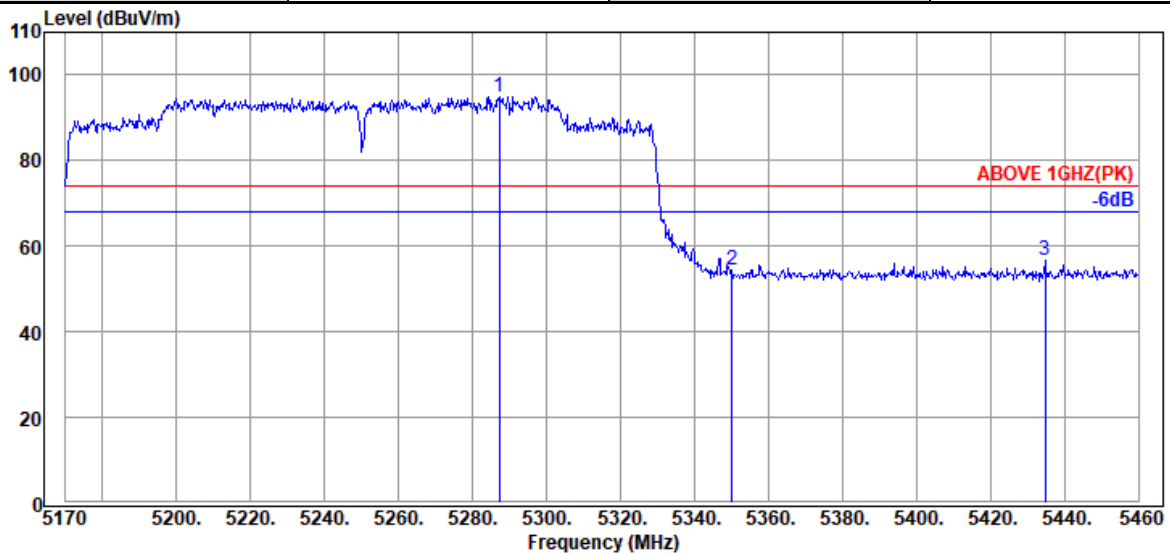

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.160	34.00	8.96	39.28	91.38	95.06	---	---	Peak
5350.090	33.90	8.99	39.27	50.82	54.44	74.00	19.56	Peak
5434.770	34.17	9.04	39.26	52.64	56.59	74.00	17.41	Peak

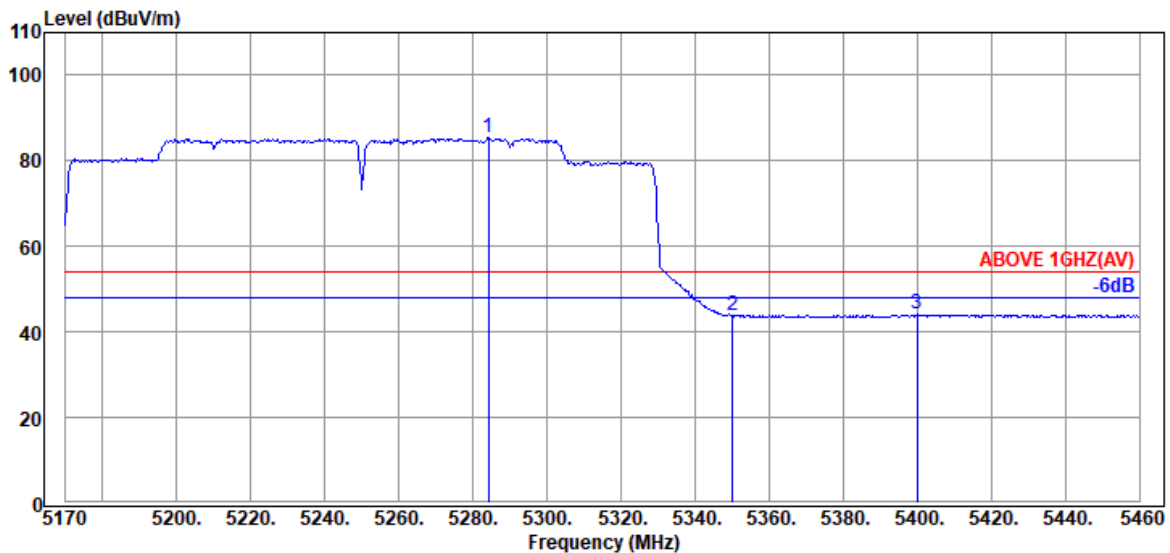


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.260	34.00	8.96	39.28	81.72	85.40	---	---	Average
5350.090	33.90	8.99	39.27	40.24	43.86	54.00	10.14	Average
5399.970	34.10	9.02	39.27	40.21	44.06	54.00	9.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

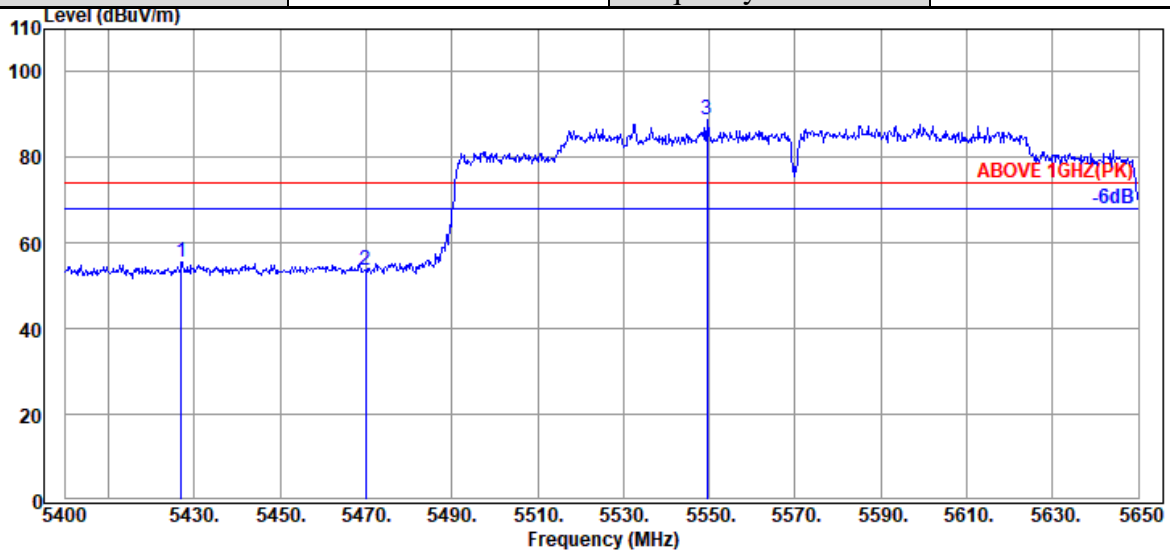

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.000	34.15	9.04	39.27	51.48	55.40	74.00	18.60	Peak
5470.000	34.17	9.06	39.26	49.69	53.66	74.00	20.34	Peak
@ 5549.500	34.10	9.10	39.27	84.79	88.72	---	---	Peak

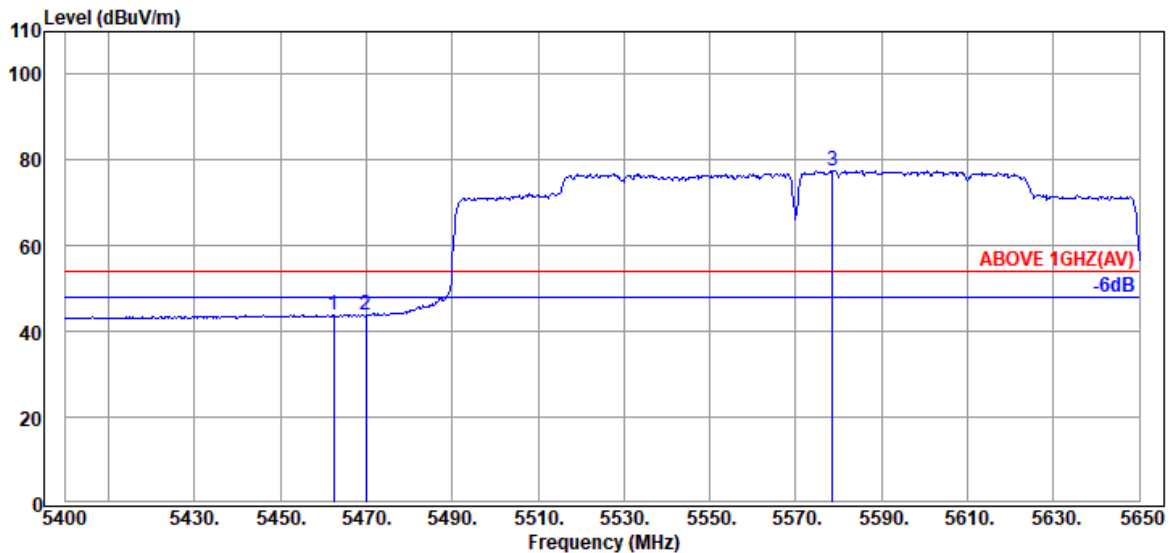


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.20	9.05	39.26	39.90	43.89	54.00	10.11	Average
5470.000	34.17	9.06	39.26	39.76	43.73	54.00	10.27	Average
@ 5578.500	34.03	9.12	39.28	73.64	77.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

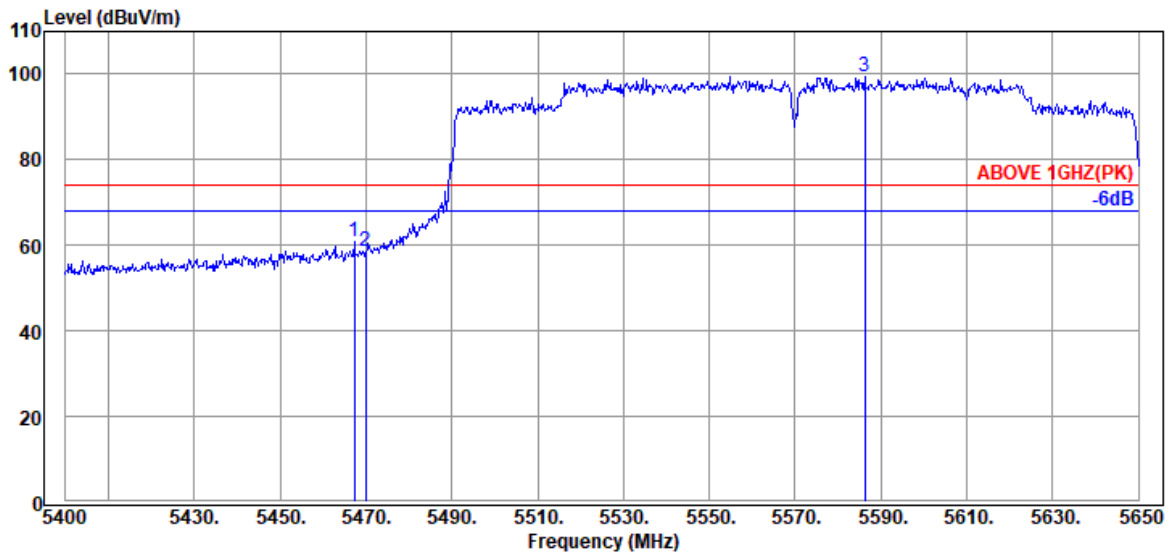

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.17	9.06	39.26	56.92	60.89	74.00	13.11	Peak
5470.000	34.17	9.06	39.26	54.47	58.44	74.00	15.56	Peak
@ 5586.250	34.03	9.12	39.28	95.60	99.47	---	---	Peak

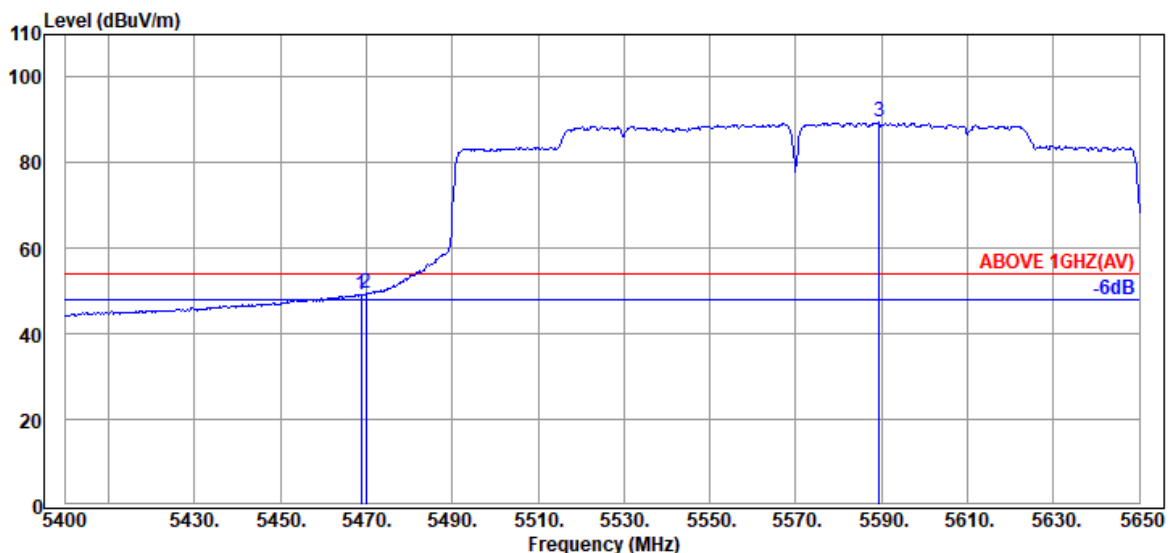


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.17	9.06	39.26	45.24	49.21	54.00	4.79	Average
5470.000	34.17	9.06	39.26	45.52	49.49	54.00	4.51	Average
@ 5589.500	34.03	9.12	39.28	85.56	89.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

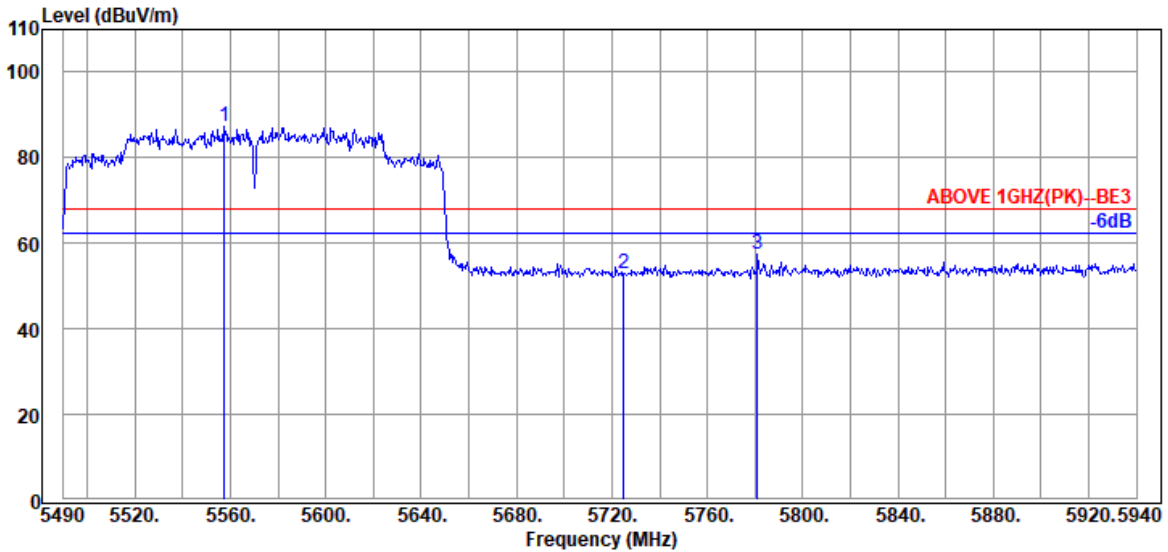

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5557.500	34.10	9.10	39.27	83.33	87.26	---	---	Peak
5724.900	33.80	9.20	39.30	49.27	52.97	68.20	15.23	Peak
5781.150	33.93	9.22	39.32	53.50	57.33	68.20	10.87	Peak

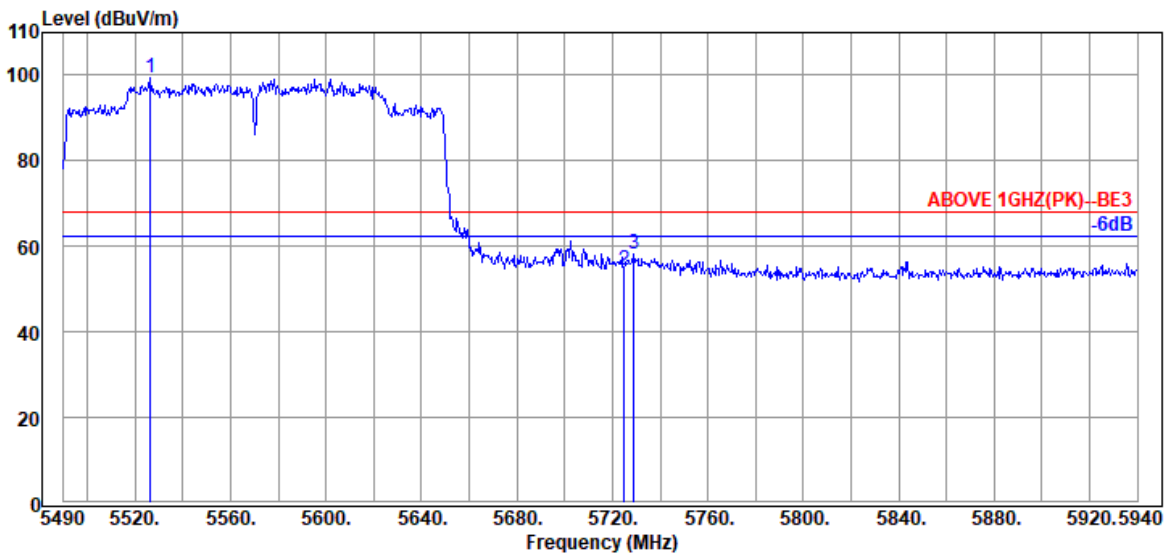


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5526.450	34.10	9.09	39.27	95.37	99.29	---	---	Peak
5724.900	33.80	9.20	39.30	50.56	54.26	68.20	13.94	Peak
5728.950	33.80	9.20	39.31	54.60	58.29	68.20	9.91	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

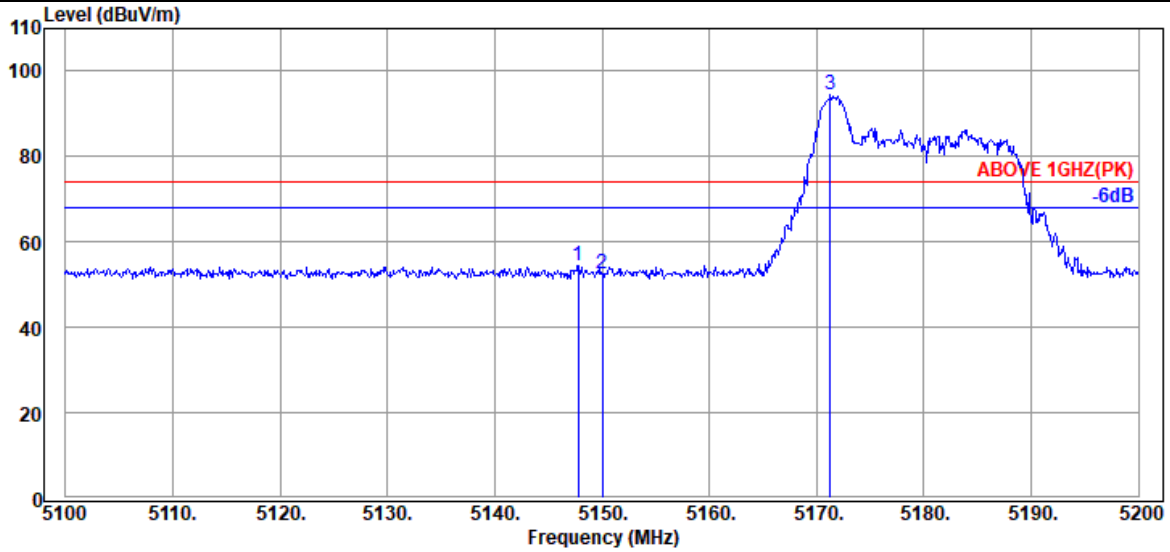

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	33.70	8.88	39.29	51.10	54.39	74.00	19.61	Peak
5150.000	33.70	8.88	39.29	49.21	52.50	74.00	21.50	Peak
@ 5171.300	33.70	8.89	39.29	91.12	94.42	---	---	Peak

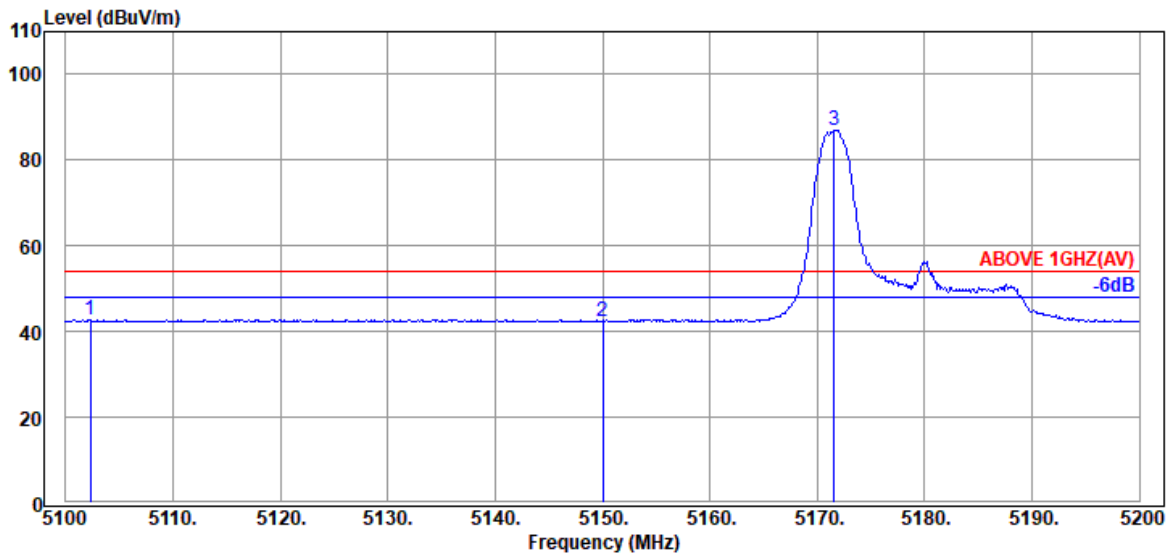


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.300	33.70	8.86	39.29	39.46	42.73	54.00	11.27	Average
5150.000	33.70	8.88	39.29	39.16	42.45	54.00	11.55	Average
@ 5171.600	33.70	8.90	39.29	83.81	87.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

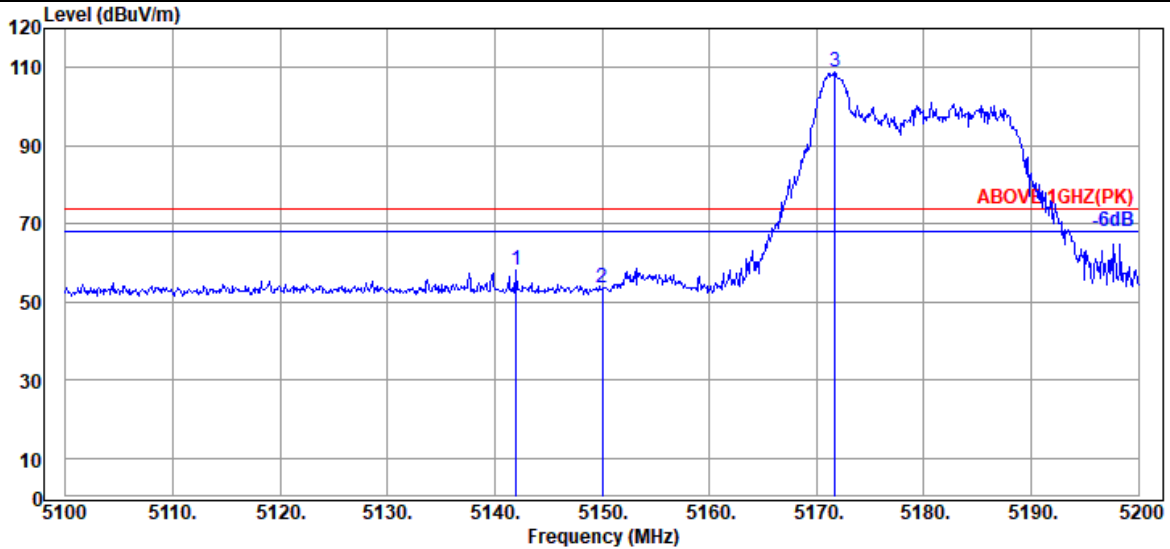

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.000	33.70	8.88	39.29	54.95	58.24	74.00	15.76	Peak
5150.000	33.70	8.88	39.29	50.19	53.48	74.00	20.52	Peak
@ 5171.700	33.70	8.90	39.29	105.54	108.85	---	---	Peak

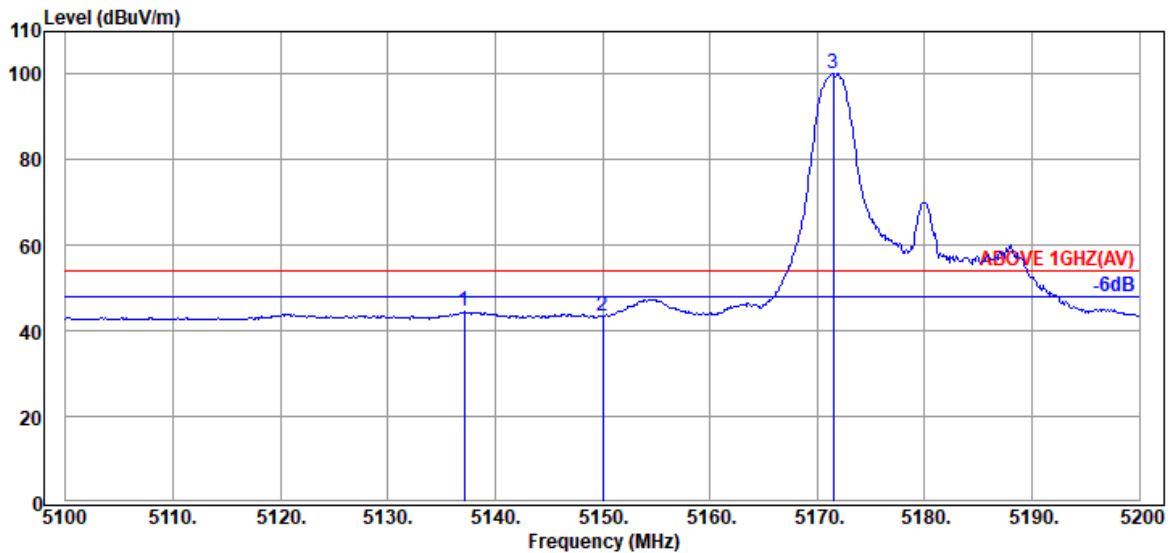


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.100	33.70	8.88	39.29	41.22	44.51	54.00	9.49	Average
5150.000	33.70	8.88	39.29	40.08	43.37	54.00	10.63	Average
@ 5171.500	33.70	8.89	39.29	96.88	100.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

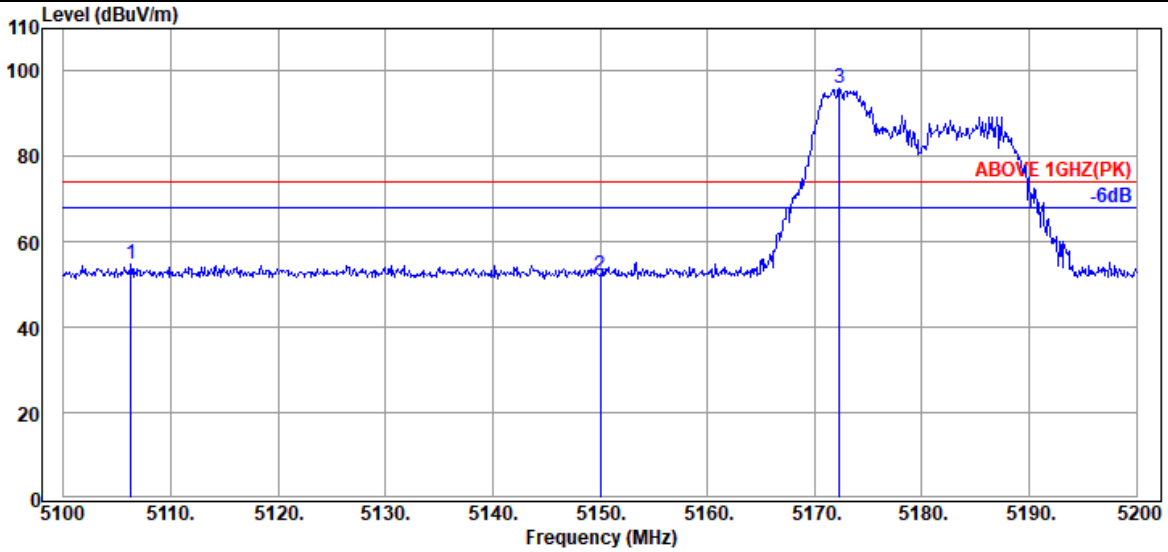

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.300	33.70	8.86	39.29	51.41	54.68	74.00	19.32	Peak
5150.000	33.70	8.88	39.29	48.78	52.07	74.00	21.93	Peak
@ 5172.300	33.70	8.90	39.29	92.52	95.83	---	---	Peak

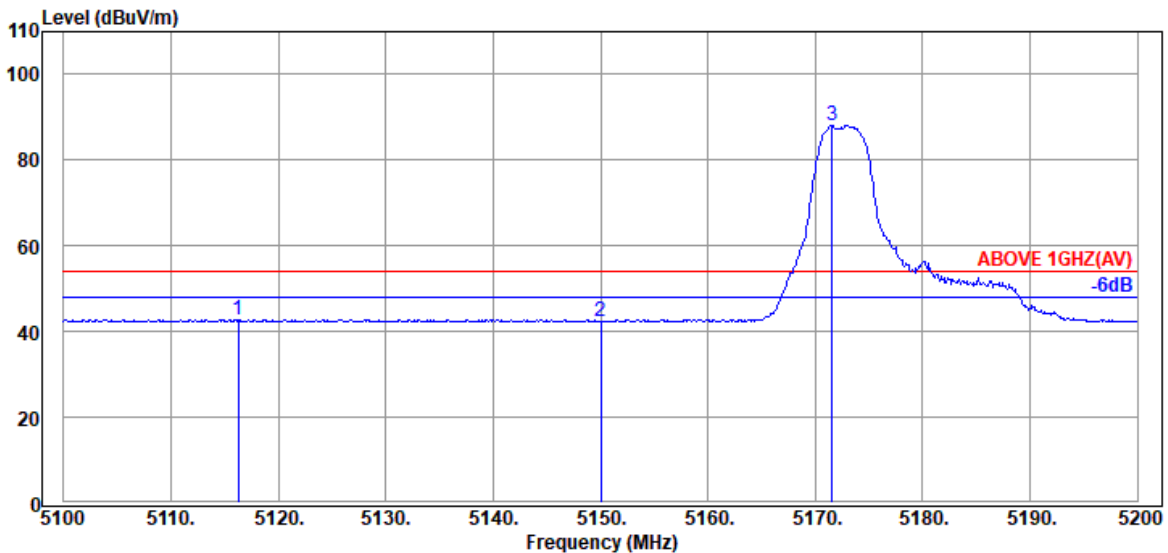


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.300	33.70	8.87	39.29	39.43	42.71	54.00	11.29	Average
5150.000	33.70	8.88	39.29	39.20	42.49	54.00	11.51	Average
@ 5171.600	33.70	8.90	39.29	84.82	88.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

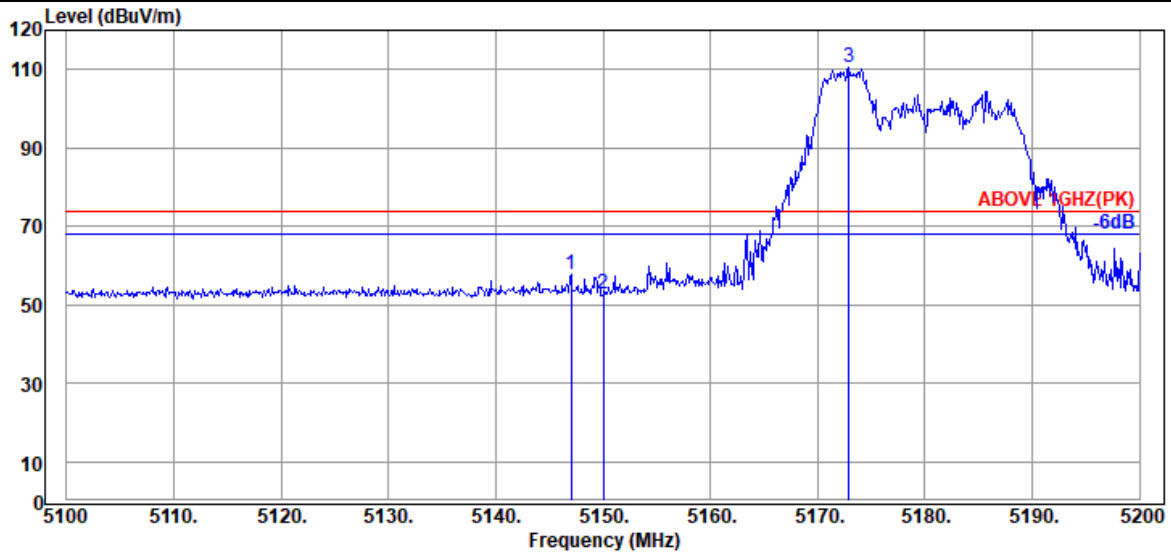

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.70	8.88	39.29	54.26	57.55	74.00	16.45	Peak
5150.000	33.70	8.88	39.29	49.62	52.91	74.00	21.09	Peak
@ 5172.900	33.70	8.90	39.29	107.19	110.50	---	---	Peak

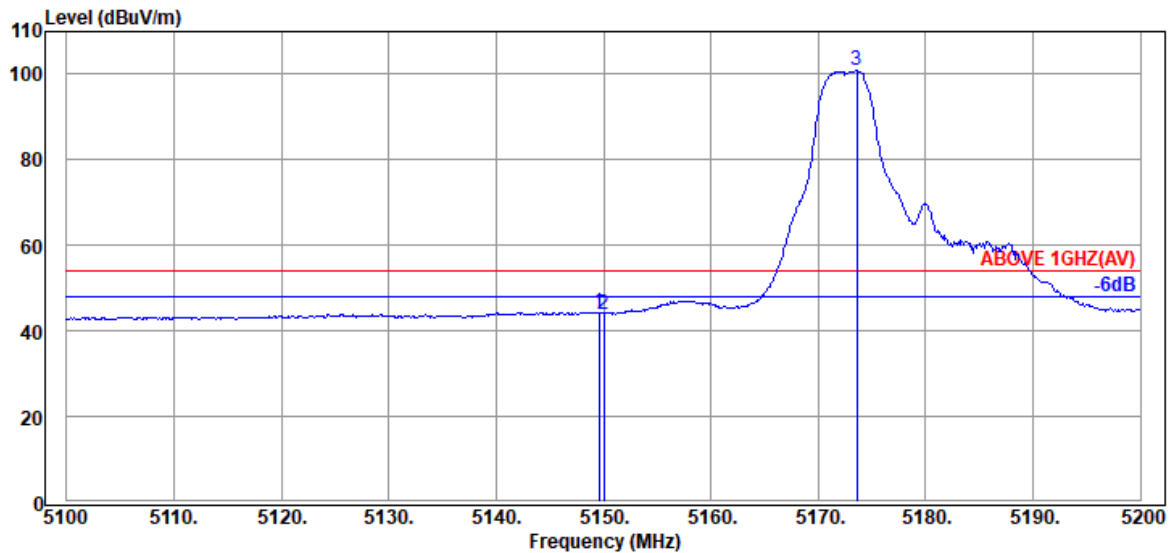


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.88	39.29	41.11	44.40	54.00	9.60	Average
5150.000	33.70	8.88	39.29	40.71	44.00	54.00	10.00	Average
@ 5173.600	33.70	8.90	39.28	97.54	100.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

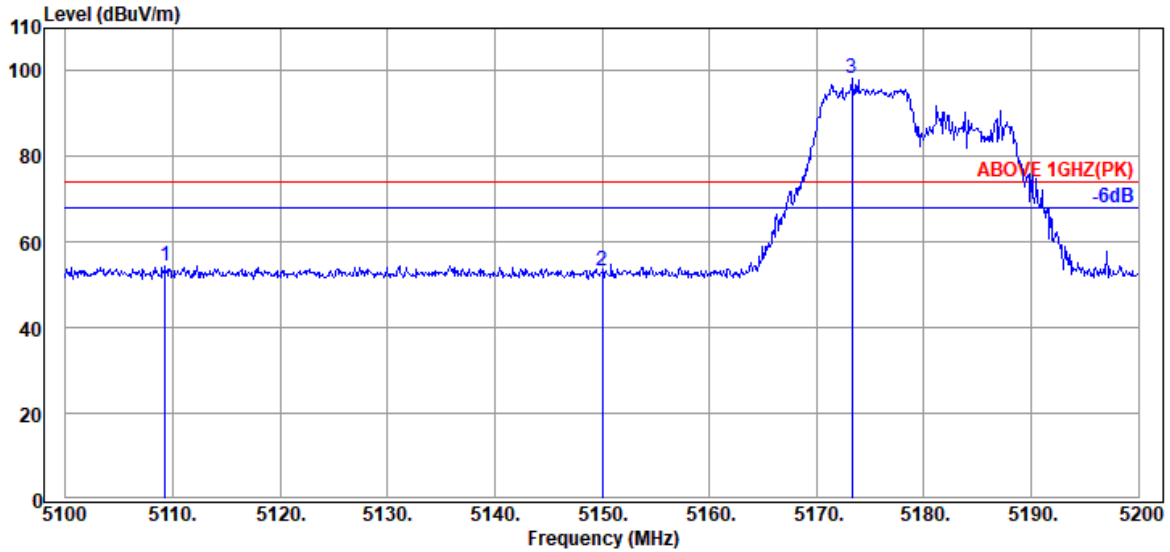

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.300	33.70	8.86	39.29	51.33	54.60	74.00	19.40	Peak
5150.000	33.70	8.88	39.29	50.01	53.30	74.00	20.70	Peak
@ 5173.300	33.70	8.90	39.28	94.98	98.30	---	---	Peak

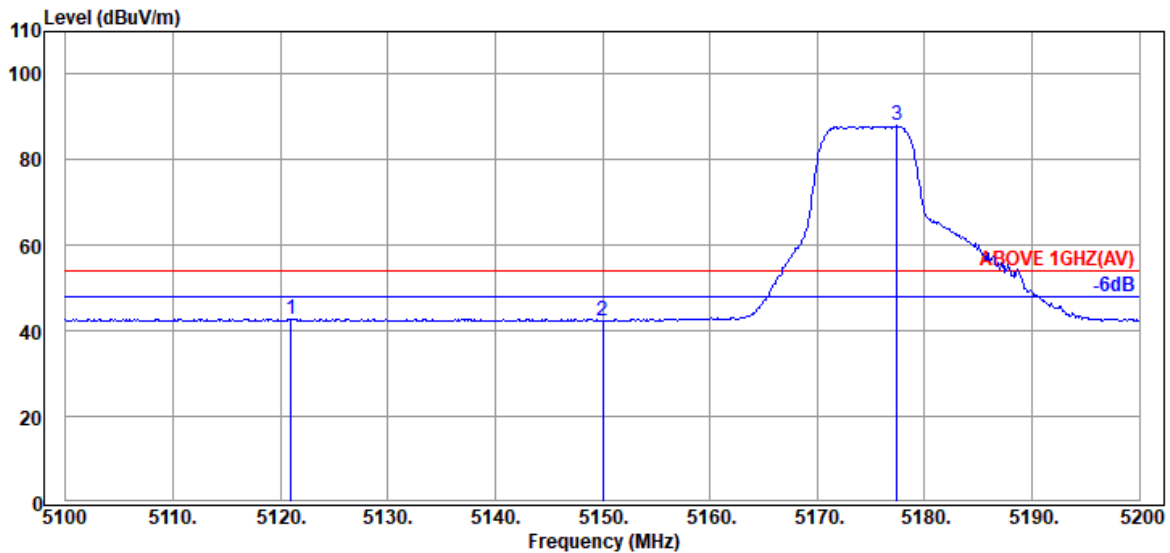


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.000	33.70	8.87	39.29	39.51	42.79	54.00	11.21	Average
5150.000	33.70	8.88	39.29	39.11	42.40	54.00	11.60	Average
@ 5177.400	33.70	8.90	39.28	84.57	87.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

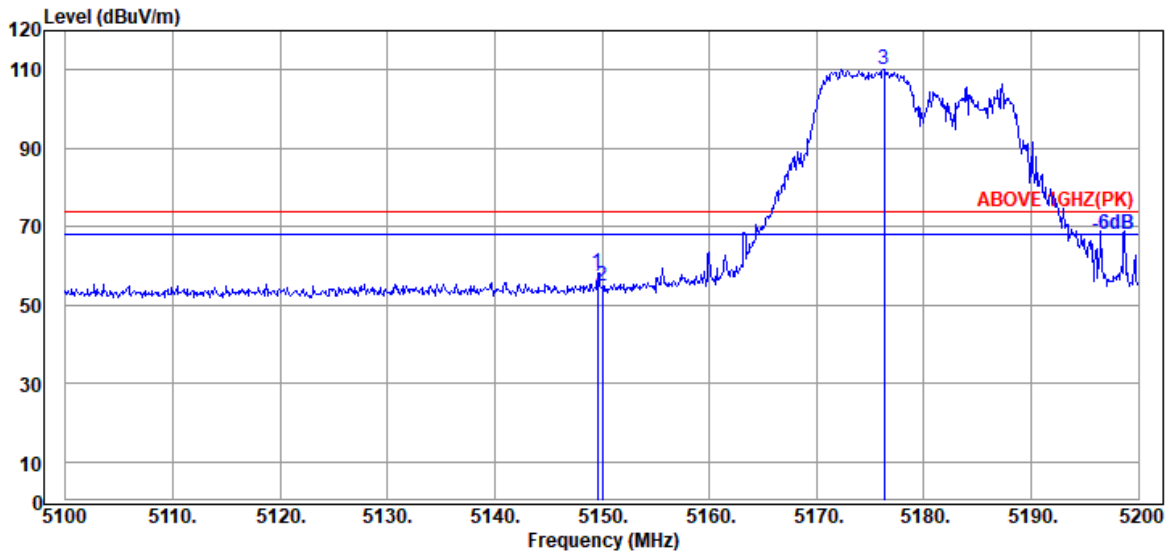

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.88	39.29	54.87	58.16	74.00	15.84	Peak
5150.000	33.70	8.88	39.29	51.38	54.67	74.00	19.33	Peak
@ 5176.300	33.70	8.90	39.28	106.88	110.20	---	---	Peak

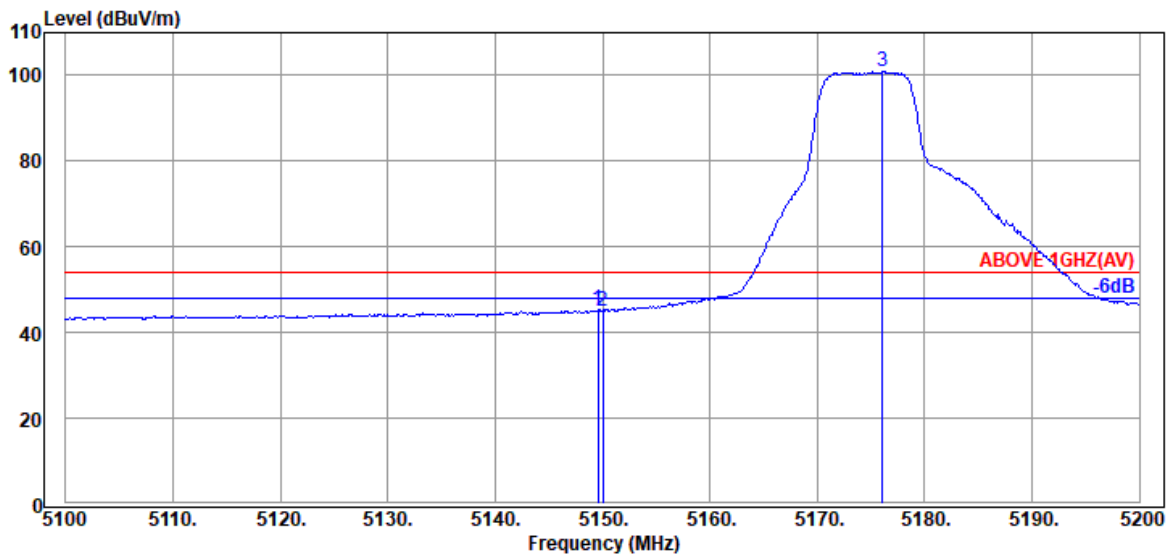


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.88	39.29	41.98	45.27	54.00	8.73	Average
5150.000	33.70	8.88	39.29	41.74	45.03	54.00	8.97	Average
@ 5176.100	33.70	8.90	39.28	97.58	100.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

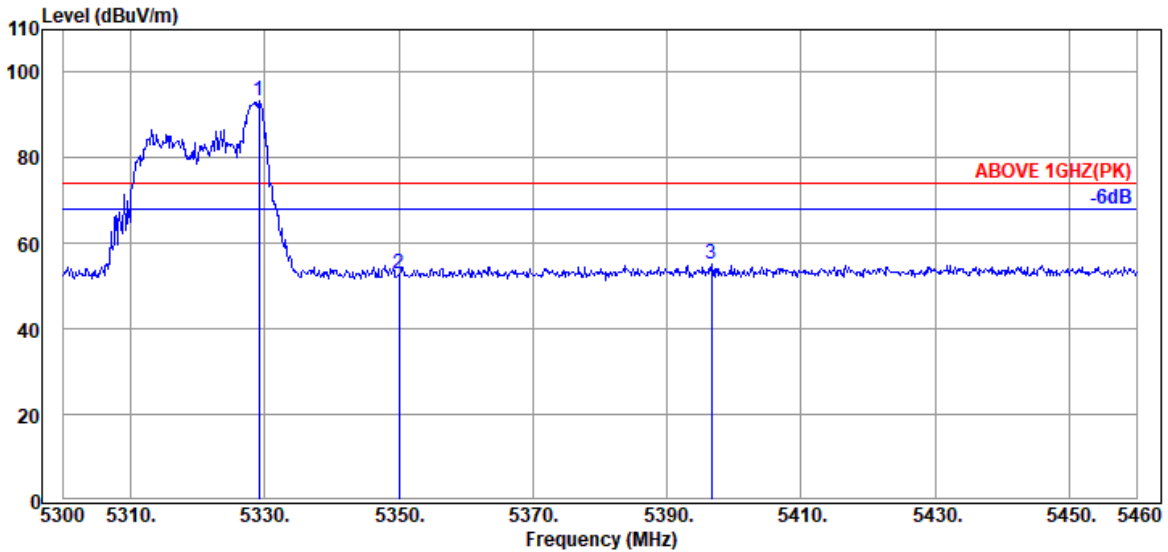

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5329.120	33.97	8.99	39.27	89.71	93.40	---	---	Peak
5350.080	33.90	8.99	39.27	49.41	53.03	74.00	20.97	Peak
5396.640	34.10	9.02	39.27	51.43	55.28	74.00	18.72	Peak

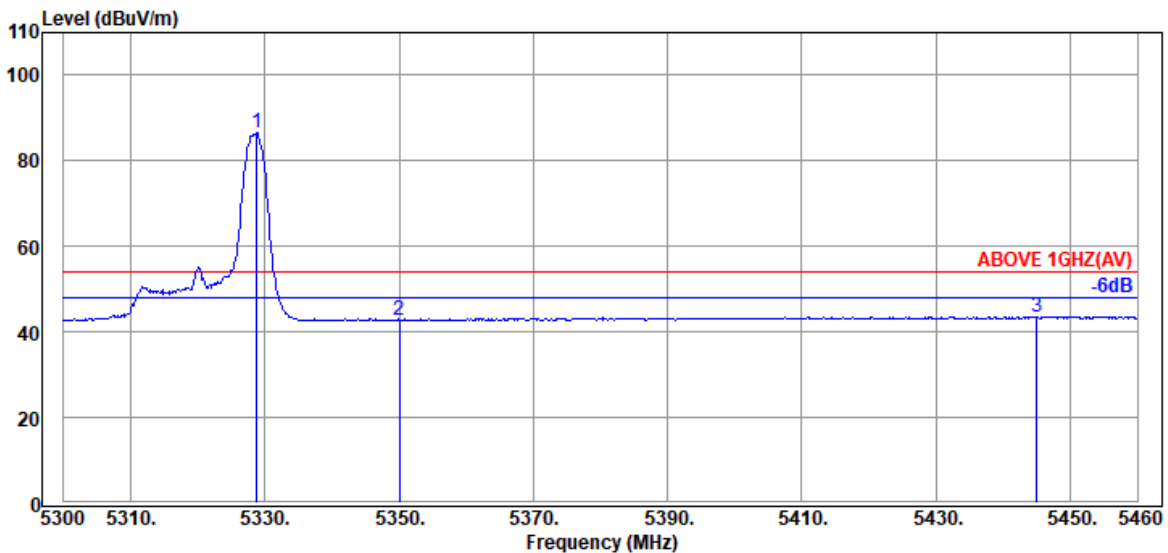


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	33.97	8.99	39.27	83.00	86.69	---	---	Average
5350.080	33.90	8.99	39.27	39.12	42.74	54.00	11.26	Average
5444.960	34.17	9.04	39.26	39.66	43.61	54.00	10.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

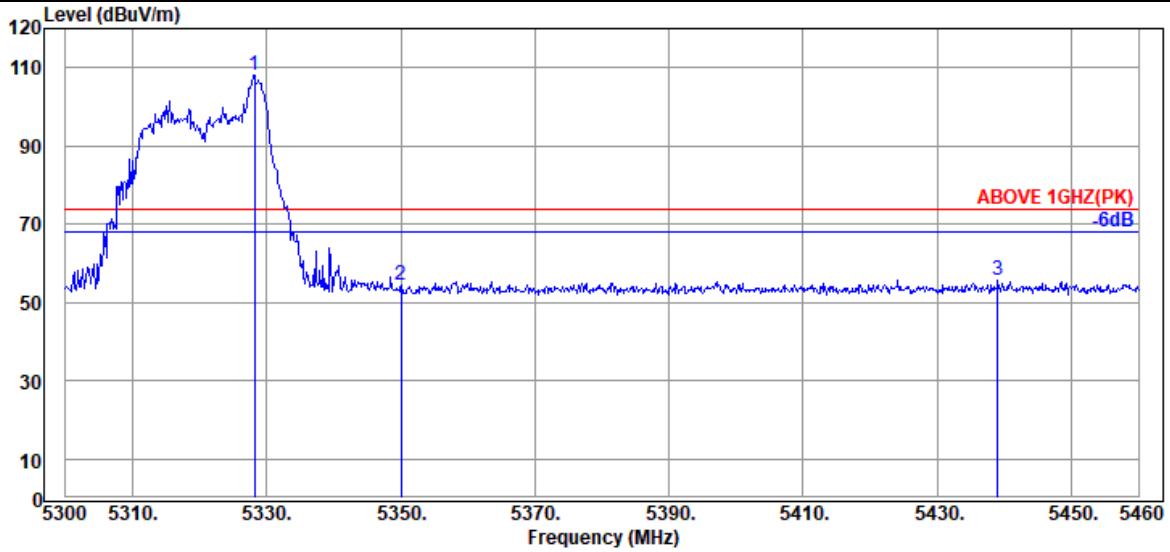

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	33.97	8.99	39.27	104.26	107.95	---	---	Peak
5350.080	33.90	8.99	39.27	50.68	54.30	74.00	19.70	Peak
5439.040	34.17	9.04	39.26	51.90	55.85	74.00	18.15	Peak

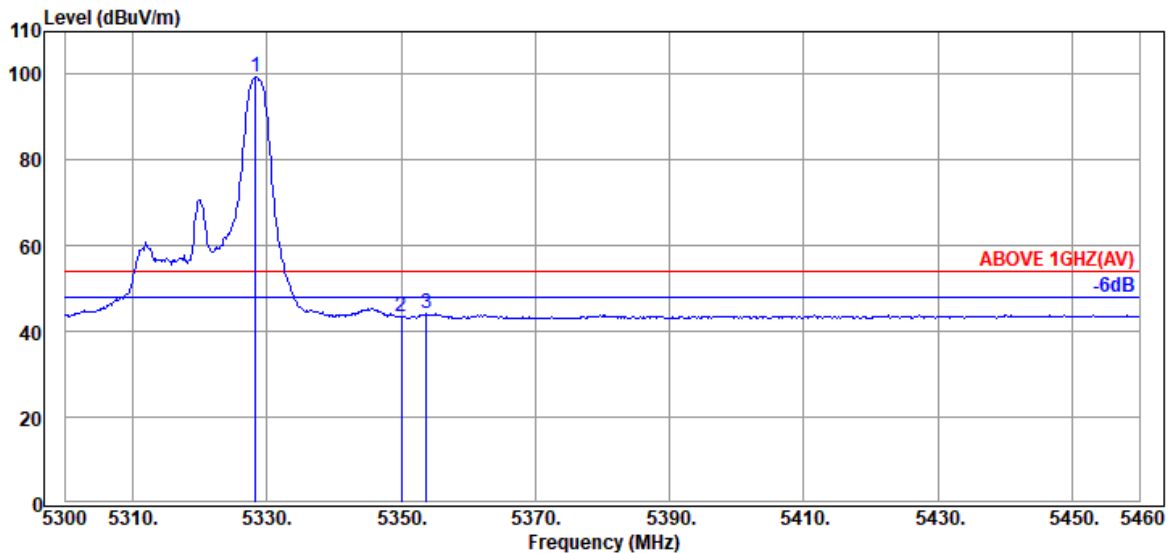


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	33.97	8.99	39.27	95.73	99.42	---	---	Average
5350.080	33.90	8.99	39.27	39.71	43.33	54.00	10.67	Average
5353.760	33.90	8.99	39.27	40.55	44.17	54.00	9.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

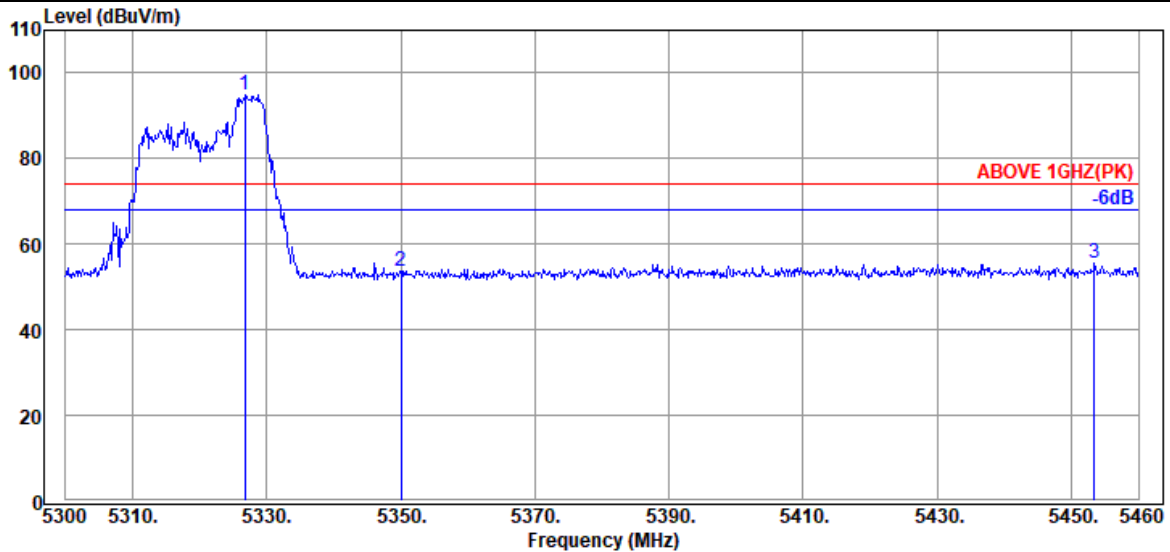

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.720	33.97	8.99	39.27	91.33	95.02	---	---	Peak
5350.080	33.90	8.99	39.27	50.01	53.63	74.00	20.37	Peak
5453.440	34.20	9.05	39.26	51.61	55.60	74.00	18.40	Peak

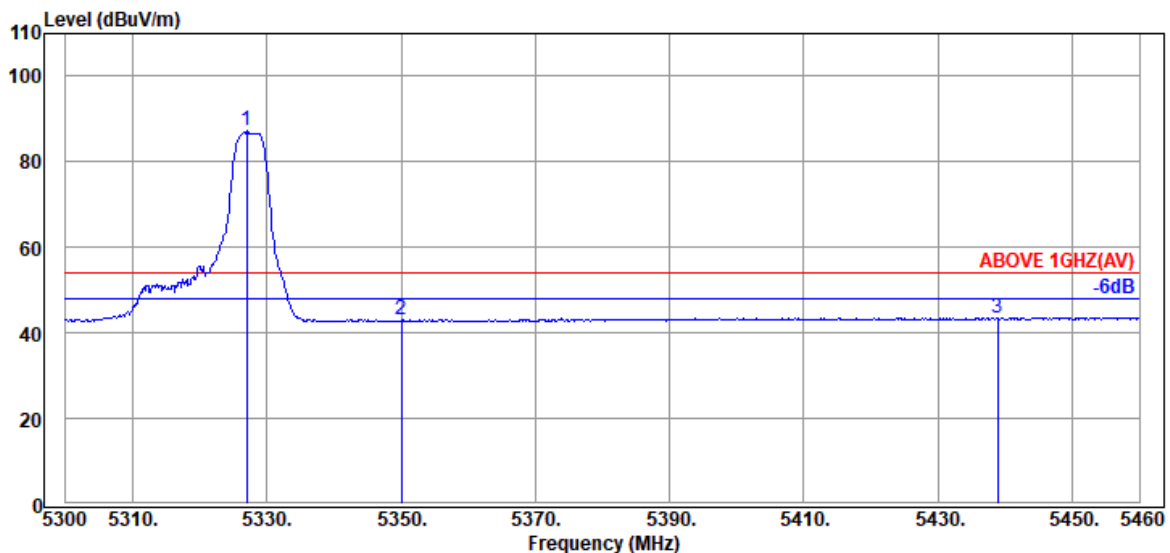


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.040	33.97	8.99	39.27	83.47	87.16	---	---	Average
5350.080	33.90	8.99	39.27	39.32	42.94	54.00	11.06	Average
5438.880	34.17	9.04	39.26	39.63	43.58	54.00	10.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

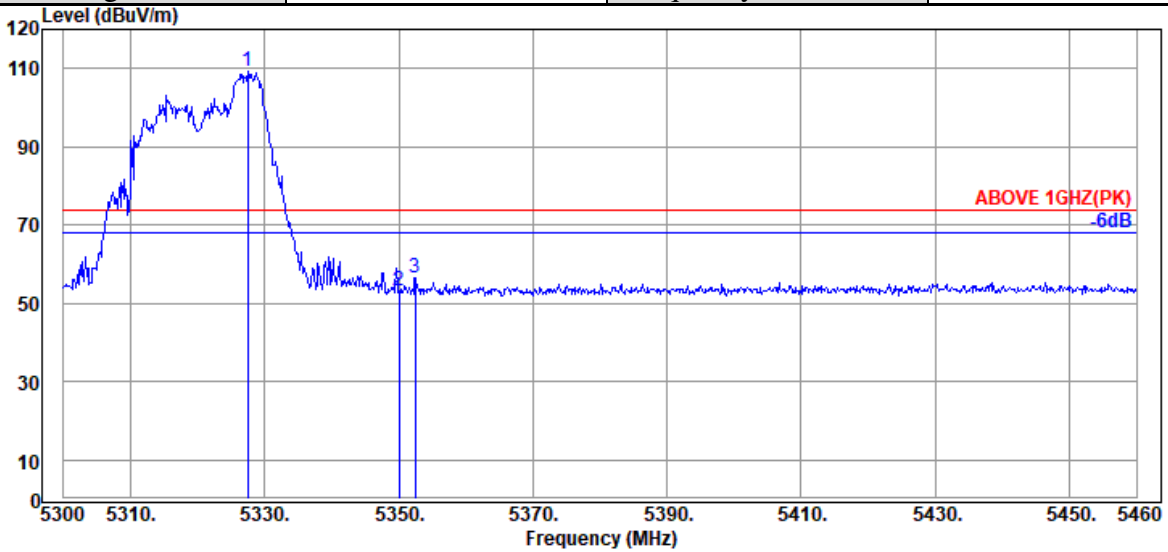

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.520	33.97	8.99	39.27	105.61	109.30	---	---	Peak
5350.080	33.90	8.99	39.27	49.73	53.35	74.00	20.65	Peak
5352.480	33.90	8.99	39.27	52.97	56.59	74.00	17.41	Peak

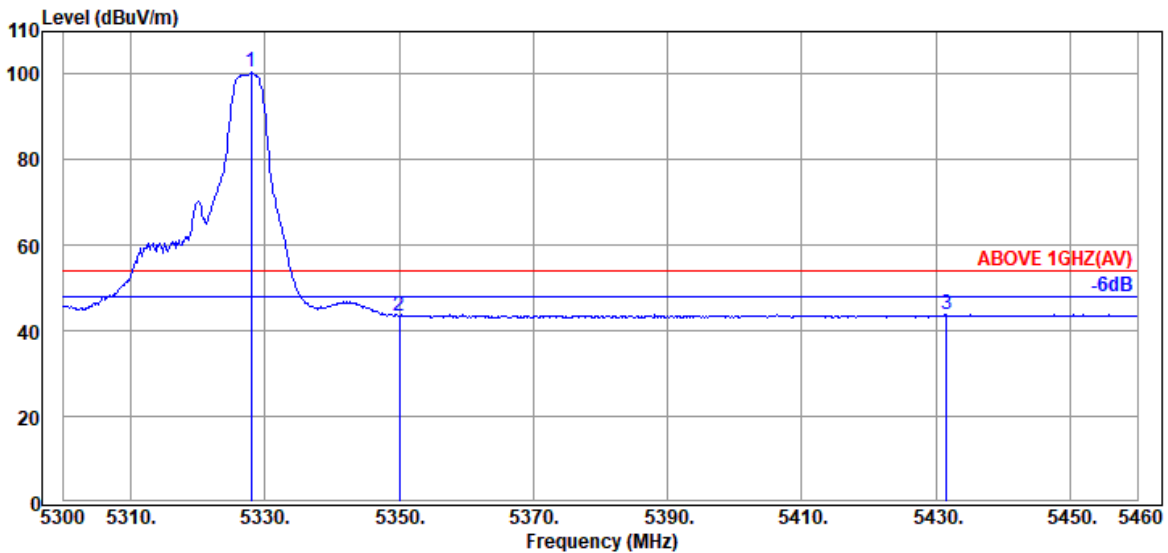


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.97	8.99	39.27	96.69	100.38	---	---	Average
5350.080	33.90	8.99	39.27	40.01	43.63	54.00	10.37	Average
5431.520	34.15	9.04	39.27	39.95	43.87	54.00	10.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

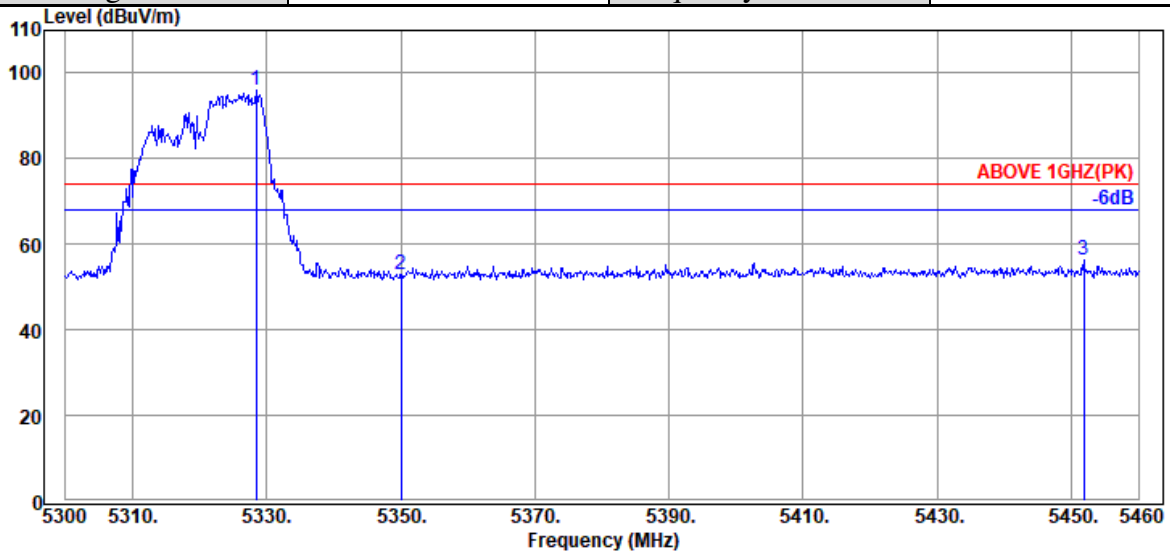

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	33.97	8.99	39.27	92.18	95.87	---	---	Peak
5350.080	33.90	8.99	39.27	49.45	53.07	74.00	20.93	Peak
5451.840	34.20	9.05	39.26	52.33	56.32	74.00	17.68	Peak

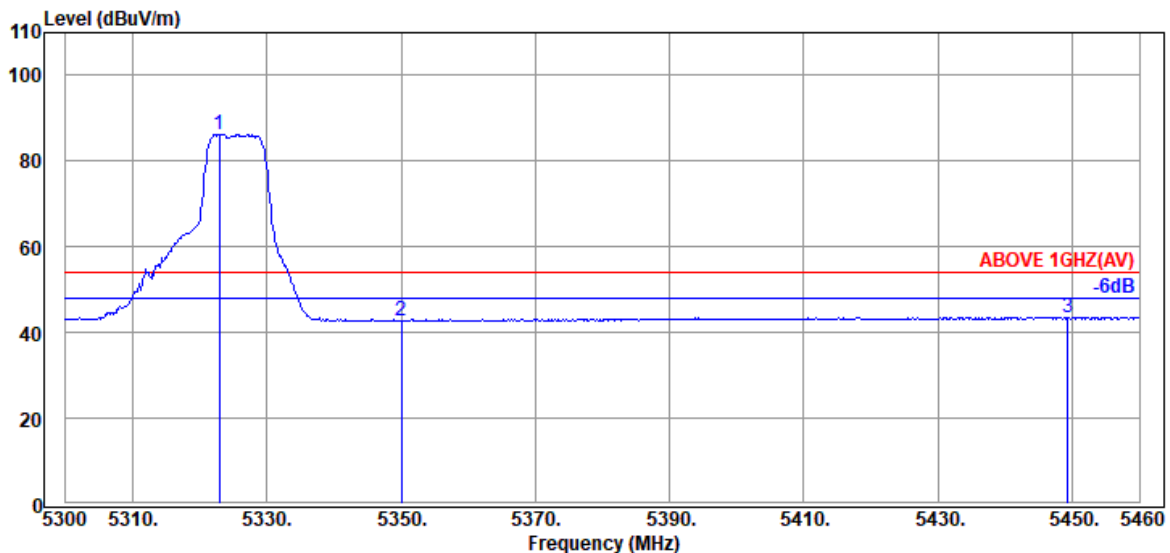


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.880	34.03	8.98	39.27	82.59	86.33	---	---	Average
5350.080	33.90	8.99	39.27	39.23	42.85	54.00	11.15	Average
5449.280	34.20	9.05	39.26	39.54	43.53	54.00	10.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

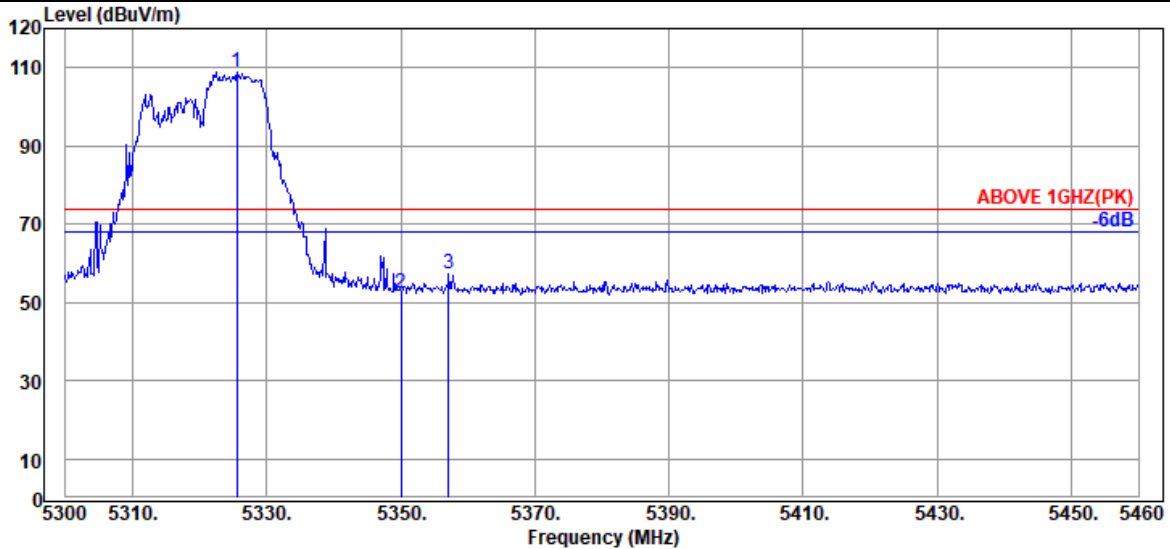

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.600	33.97	8.99	39.27	105.26	108.95	---	---	Peak
5350.080	33.90	8.99	39.27	48.84	52.46	74.00	21.54	Peak
5357.120	33.97	9.00	39.27	53.54	57.24	74.00	16.76	Peak

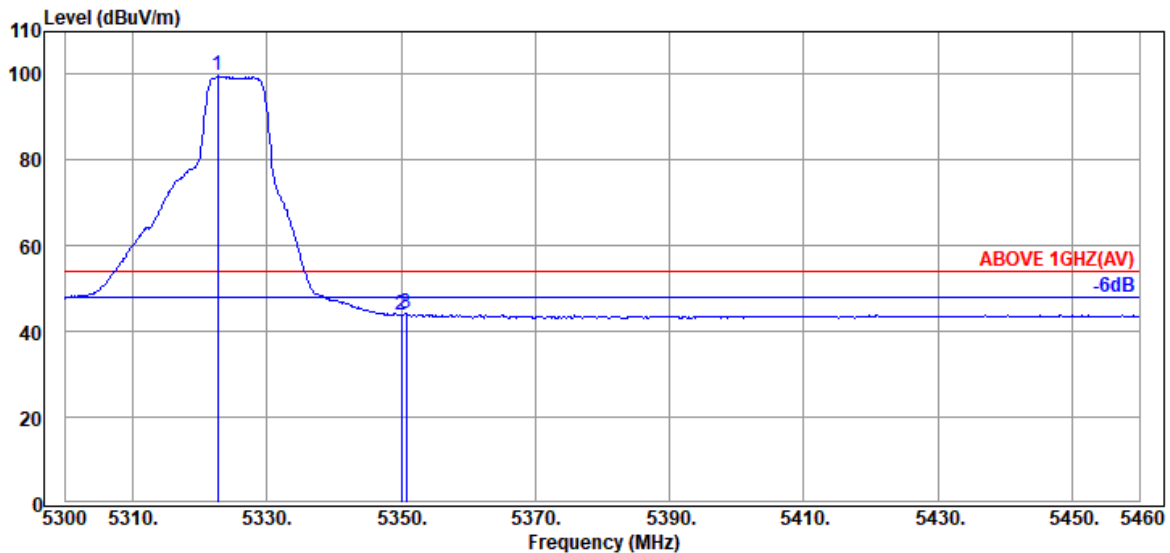


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	34.03	8.98	39.27	95.87	99.61	---	---	Average
5350.080	33.90	8.99	39.27	40.37	43.99	54.00	10.01	Average
5350.720	33.90	8.99	39.27	40.53	44.15	54.00	9.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

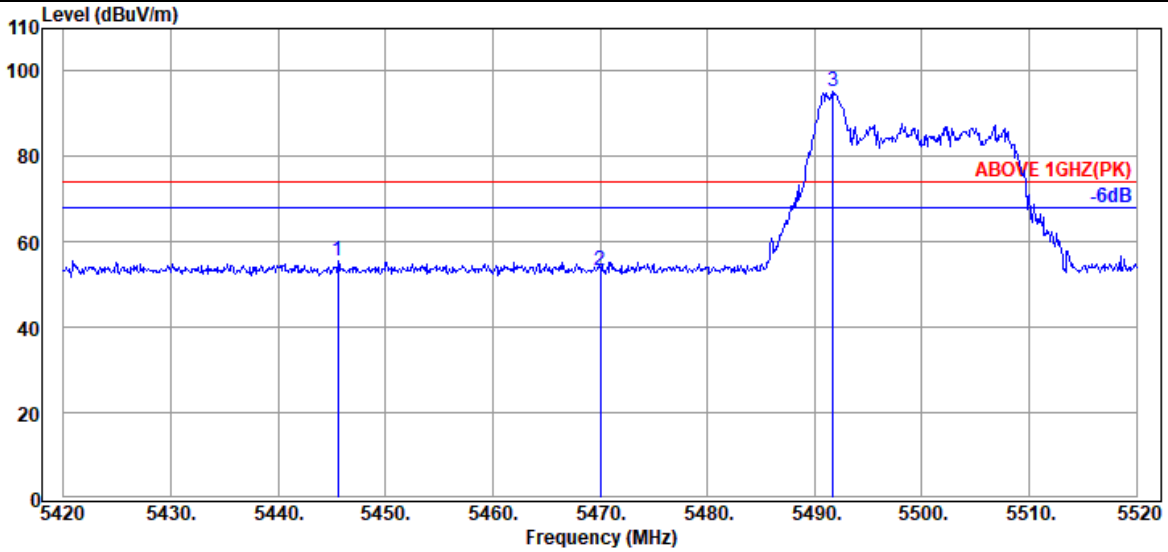

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.600	34.17	9.04	39.26	51.58	55.53	74.00	18.47	Peak
5470.000	34.17	9.06	39.26	49.34	53.31	74.00	20.69	Peak
@ 5491.700	34.13	9.07	39.26	91.18	95.12	---	---	Peak

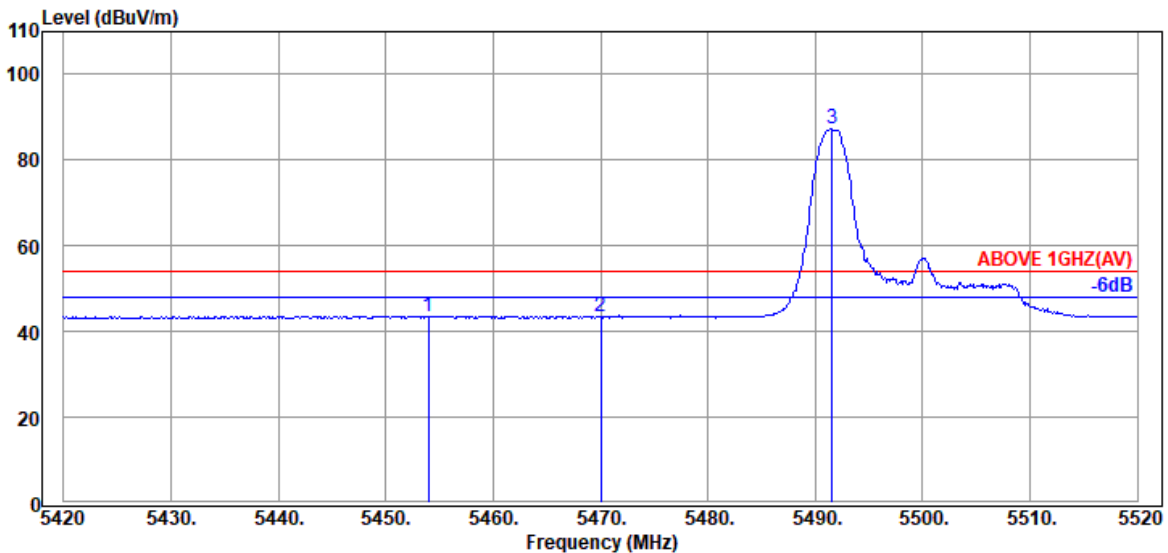


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.000	34.20	9.05	39.26	39.67	43.66	54.00	10.34	Average
5470.000	34.17	9.06	39.26	39.51	43.48	54.00	10.52	Average
@ 5491.600	34.13	9.07	39.26	83.48	87.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

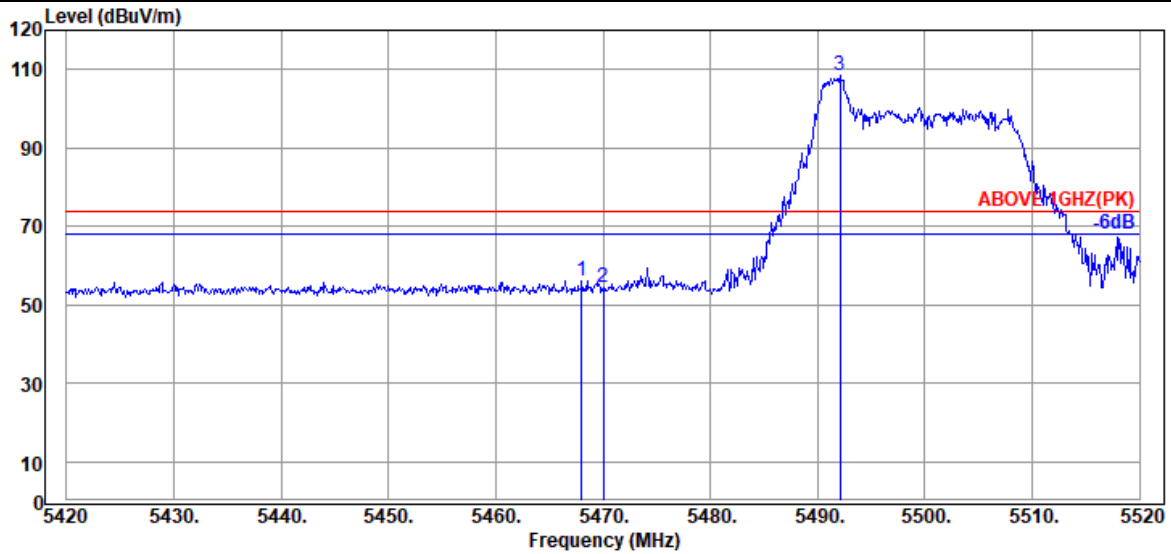

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.17	9.06	39.26	52.11	56.08	74.00	17.92	Peak
5470.000	34.17	9.06	39.26	50.41	54.38	74.00	19.62	Peak
@ 5492.100	34.13	9.07	39.26	104.35	108.29	---	---	Peak

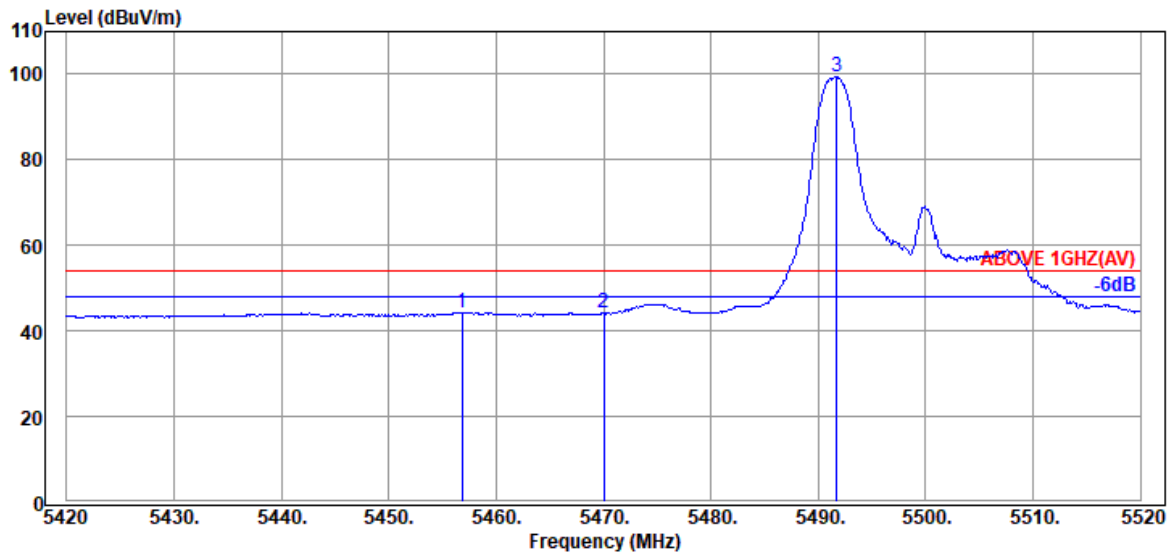


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.800	34.20	9.05	39.26	40.39	44.38	54.00	9.62	Average
5470.000	34.17	9.06	39.26	40.17	44.14	54.00	9.86	Average
@ 5491.700	34.13	9.07	39.26	95.45	99.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

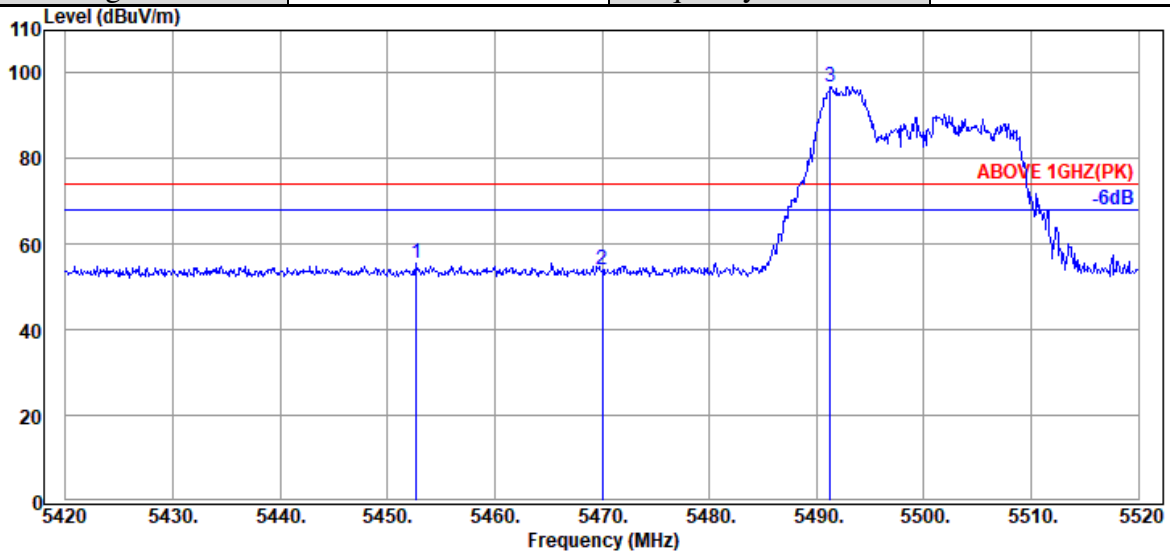

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.700	34.20	9.05	39.26	51.47	55.46	74.00	18.54	Peak
5470.000	34.17	9.06	39.26	49.95	53.92	74.00	20.08	Peak
@ 5491.300	34.13	9.07	39.26	93.01	96.95	---	---	Peak

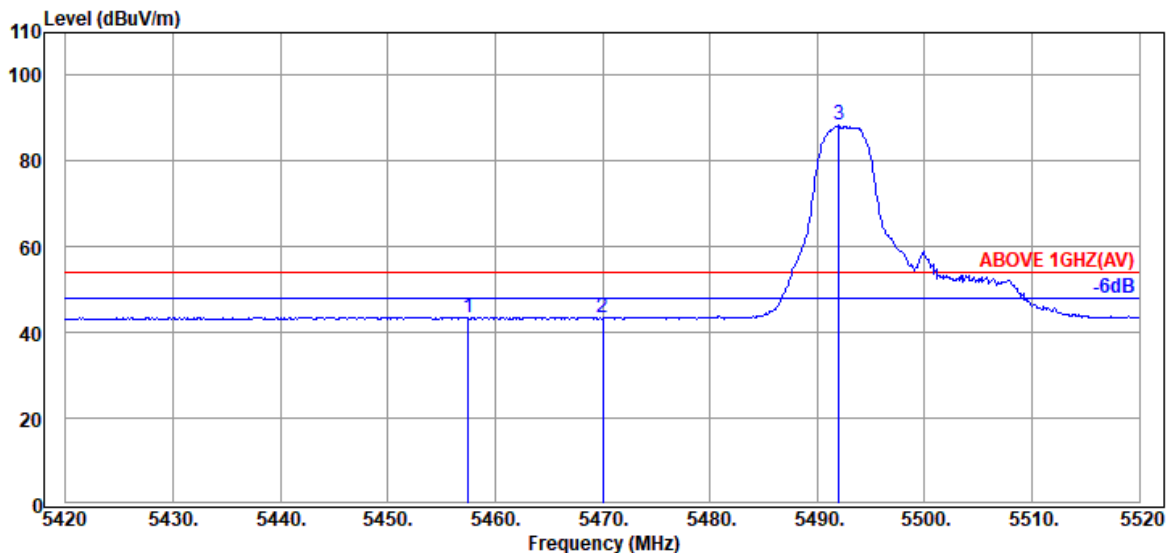


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.20	9.05	39.26	39.59	43.58	54.00	10.42	Average
5470.000	34.17	9.06	39.26	39.32	43.29	54.00	10.71	Average
@ 5492.000	34.13	9.07	39.26	84.40	88.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

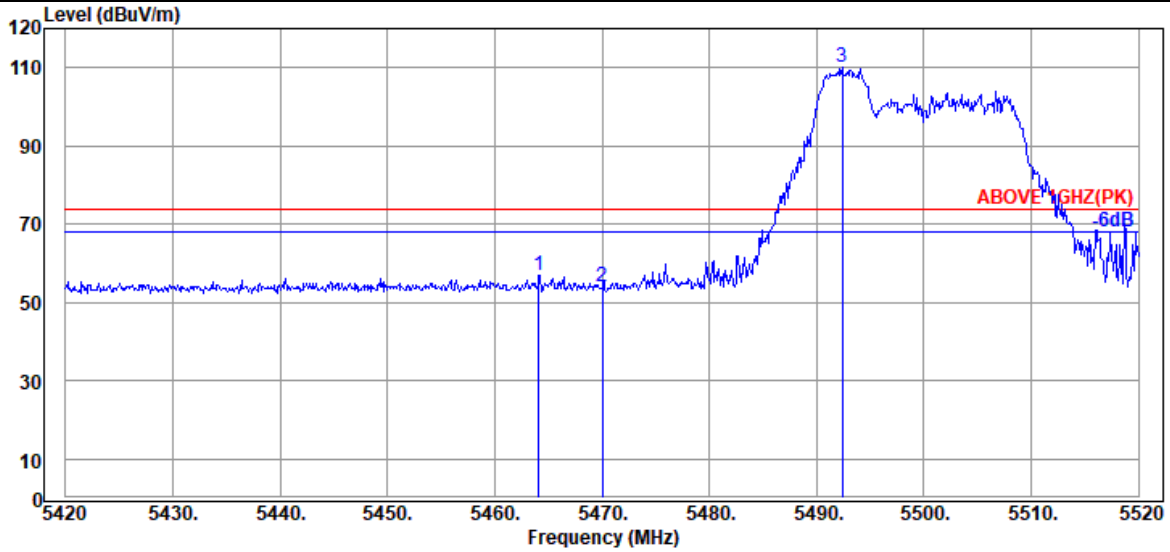

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.17	9.06	39.26	52.95	56.92	74.00	17.08	Peak
5470.000	34.17	9.06	39.26	50.05	54.02	74.00	19.98	Peak
@ 5492.400	34.13	9.07	39.26	106.20	110.14	---	---	Peak

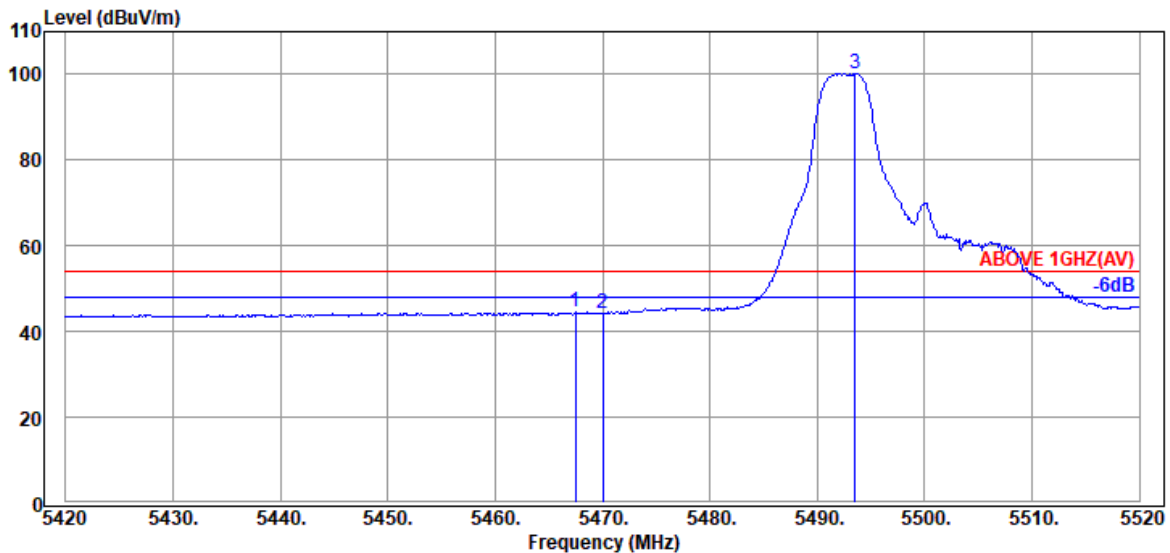


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.17	9.06	39.26	40.48	44.45	54.00	9.55	Average
5470.000	34.17	9.06	39.26	40.35	44.32	54.00	9.68	Average
@ 5493.500	34.13	9.07	39.26	96.22	100.16	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

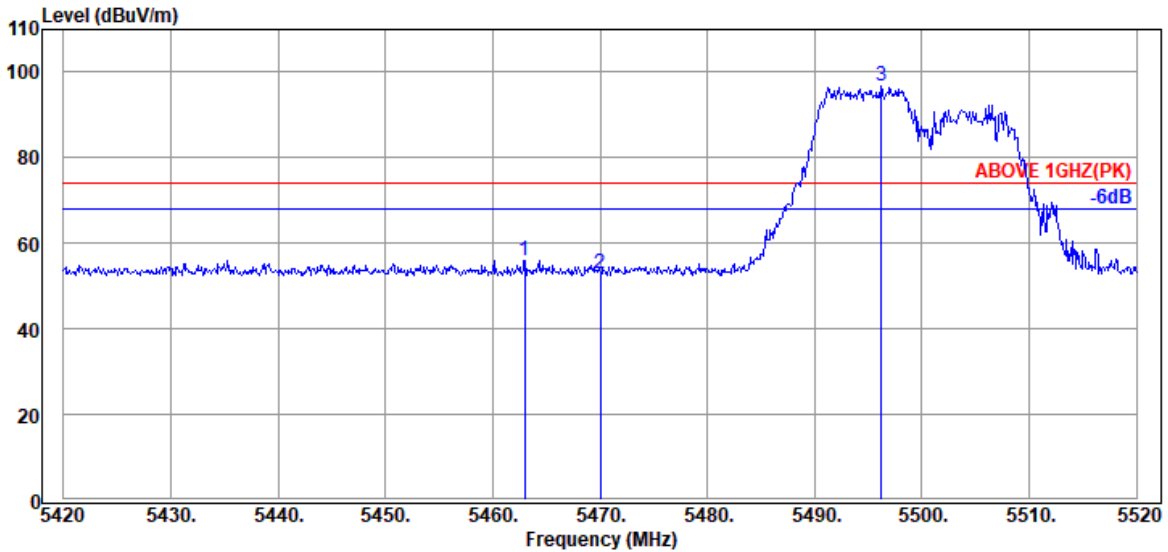

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.000	34.20	9.05	39.26	52.10	56.09	74.00	17.91	Peak
5470.000	34.17	9.06	39.26	48.91	52.88	74.00	21.12	Peak
@ 5496.200	34.10	9.08	39.26	92.74	96.66	---	---	Peak

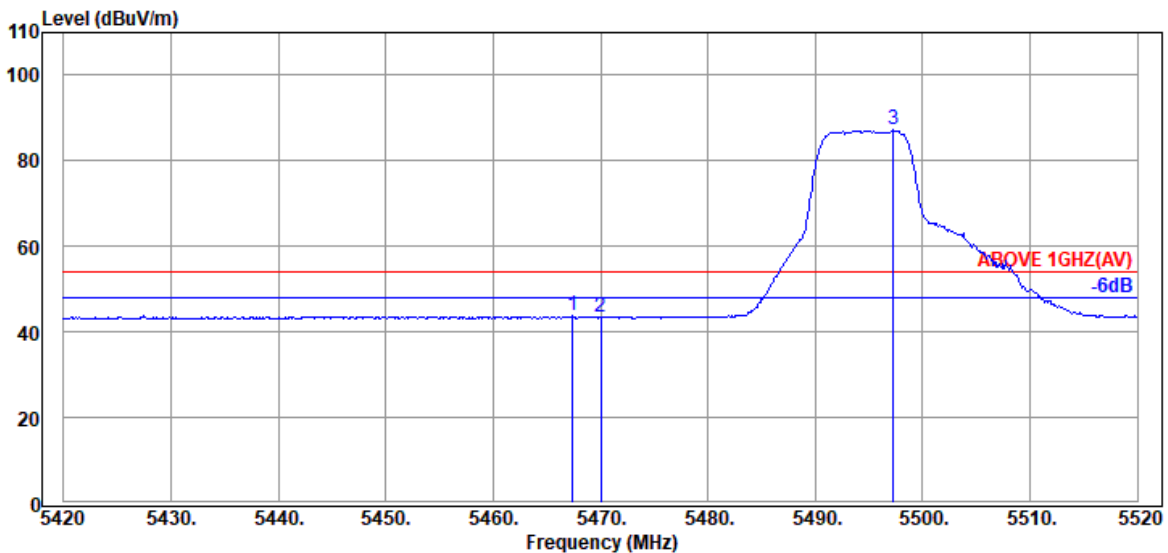


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	9.06	39.26	39.76	43.73	54.00	10.27	Average
5470.000	34.17	9.06	39.26	39.36	43.33	54.00	10.67	Average
@ 5497.300	34.10	9.08	39.26	83.22	87.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

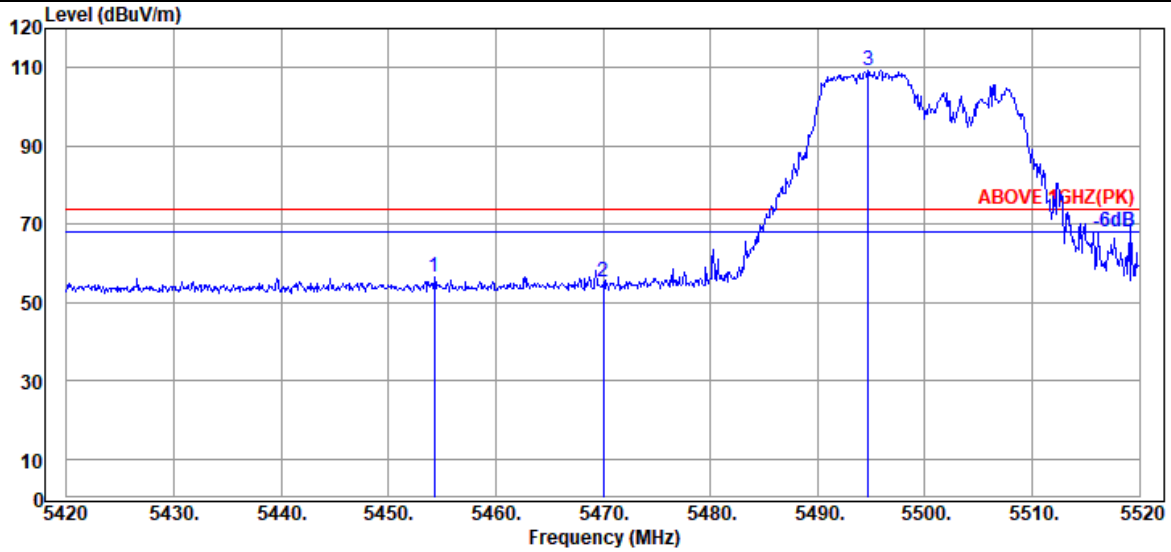

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.300	34.20	9.05	39.26	52.55	56.54	74.00	17.46	Peak
5470.000	34.17	9.06	39.26	51.29	55.26	74.00	18.74	Peak
@ 5494.700	34.13	9.07	39.26	105.53	109.47	---	---	Peak

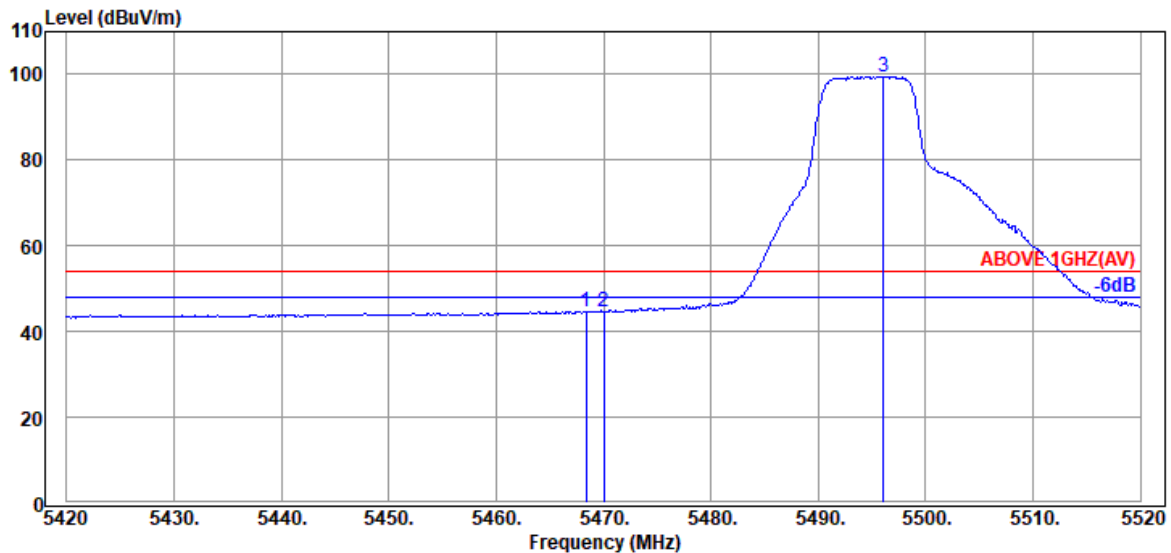


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.17	9.06	39.26	40.73	44.70	54.00	9.30	Average
5470.000	34.17	9.06	39.26	40.65	44.62	54.00	9.38	Average
@ 5496.100	34.10	9.08	39.26	95.53	99.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

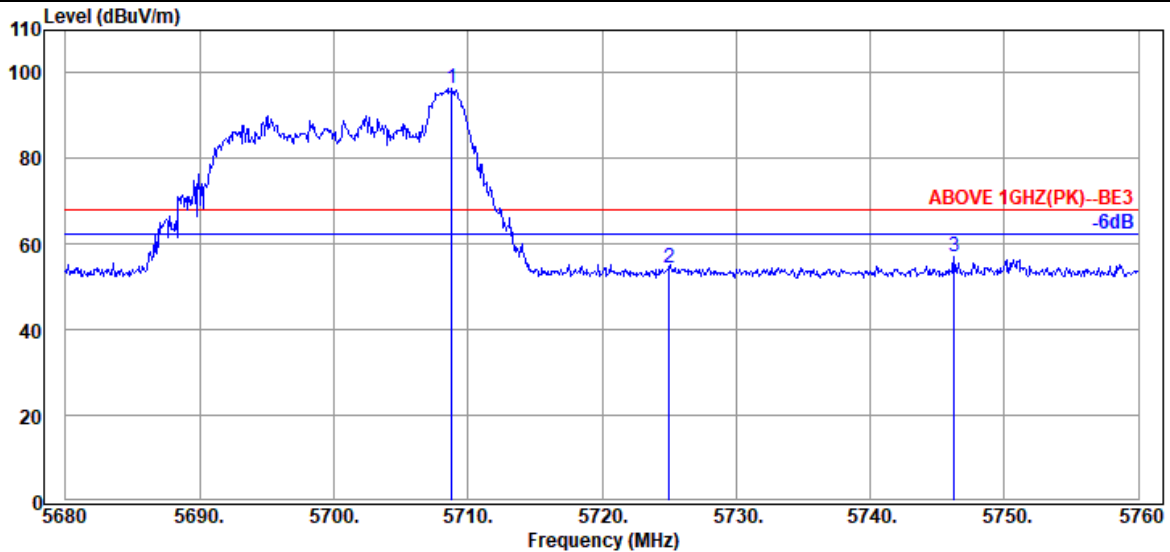

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.800	33.80	9.19	39.30	92.52	96.21	---	---	Peak
5725.040	33.80	9.20	39.30	50.61	54.31	68.20	13.89	Peak
5746.240	33.80	9.20	39.31	53.22	56.91	68.20	11.29	Peak

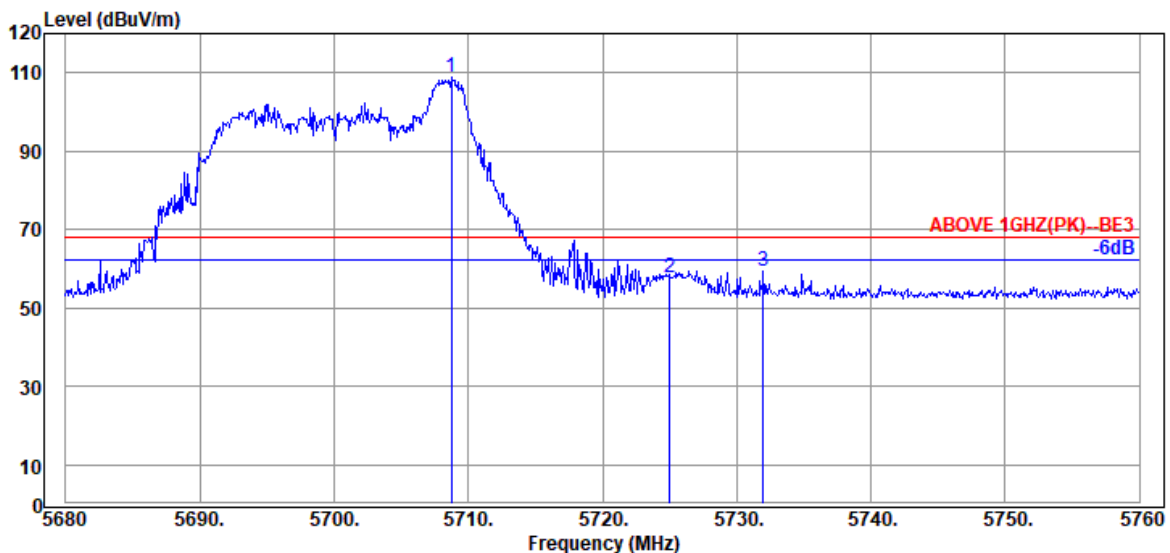


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.720	33.80	9.19	39.30	105.13	108.82	---	---	Peak
5725.040	33.80	9.20	39.30	53.94	57.64	68.20	10.56	Peak
5732.000	33.80	9.20	39.31	55.59	59.28	68.20	8.92	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

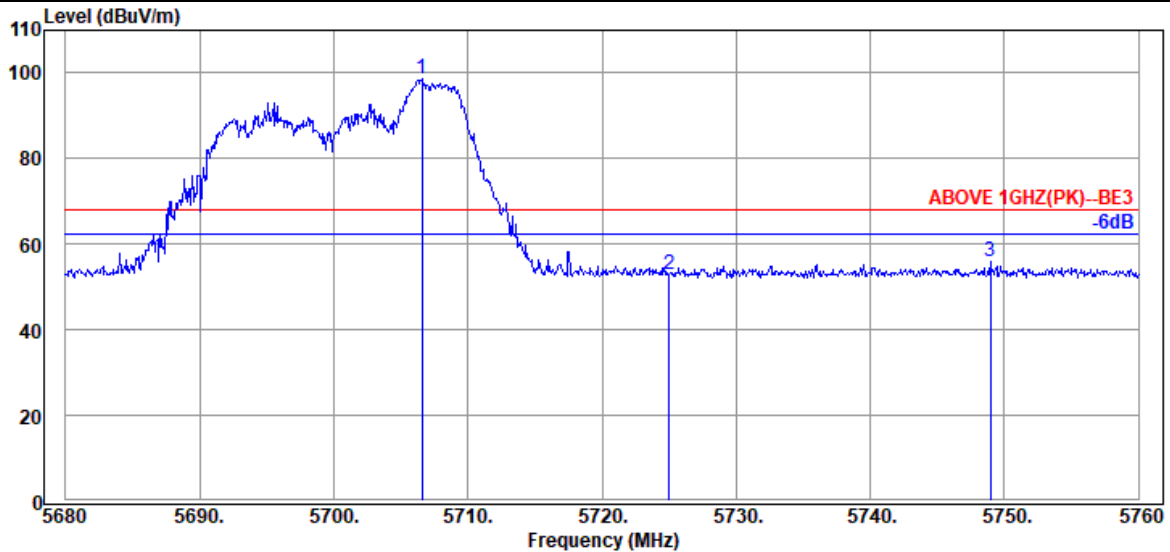

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.560	33.80	9.19	39.30	94.92	98.61	---	---	Peak
5725.040	33.80	9.20	39.30	49.15	52.85	68.20	15.35	Peak
5748.960	33.80	9.20	39.31	52.34	56.03	68.20	12.17	Peak

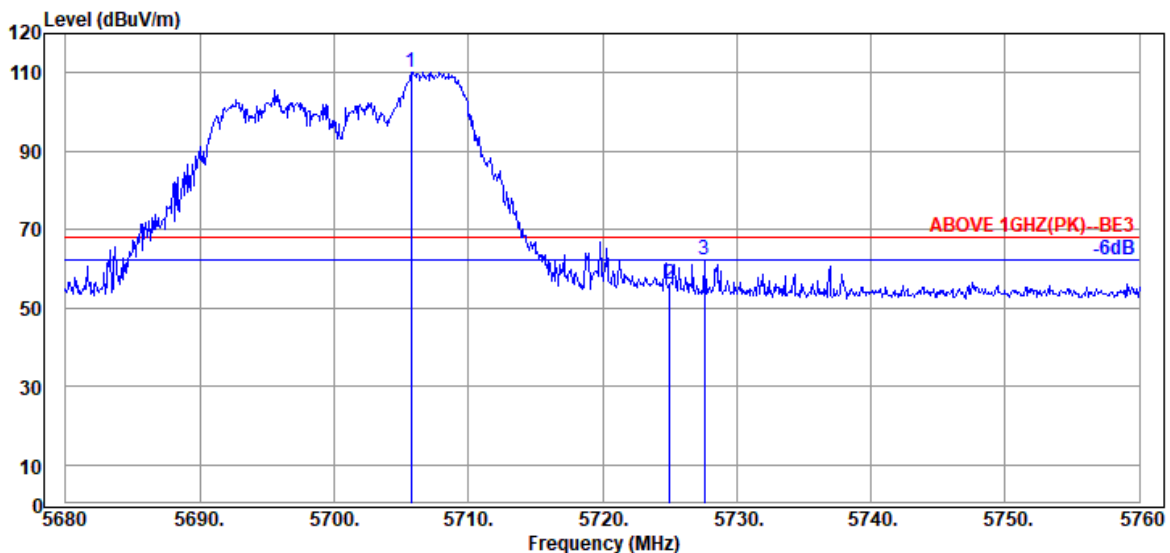


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.760	33.80	9.19	39.30	106.61	110.30	---	---	Peak
5725.040	33.80	9.20	39.30	52.57	56.27	68.20	11.93	Peak
5727.600	33.80	9.20	39.31	58.71	62.40	68.20	5.80	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

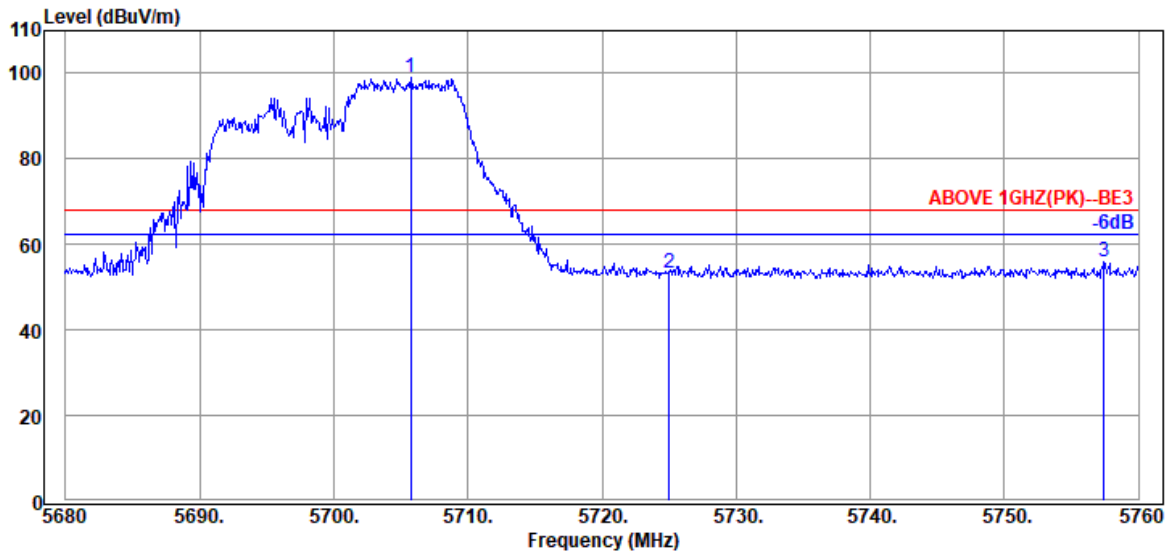

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.760	33.80	9.19	39.30	95.32	99.01	---	---	Peak
5725.040	33.80	9.20	39.30	49.73	53.43	68.20	14.77	Peak
5757.440	33.87	9.21	39.31	52.13	55.90	68.20	12.30	Peak

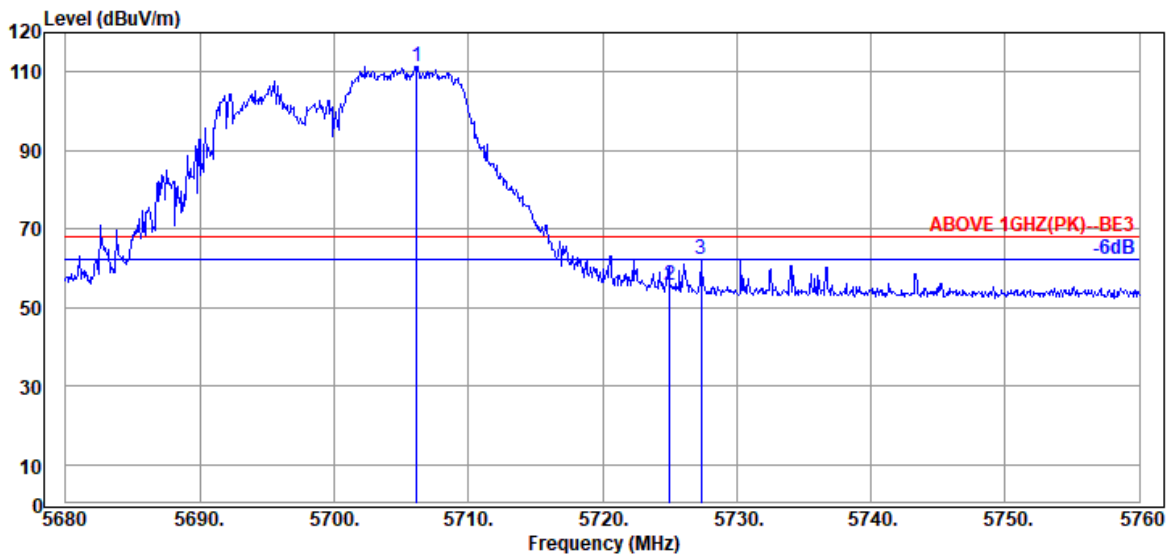


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.160	33.80	9.19	39.30	107.75	111.44	---	---	Peak
5725.040	33.80	9.20	39.30	52.13	55.83	68.20	12.37	Peak
5727.360	33.80	9.20	39.31	58.53	62.22	68.20	5.98	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

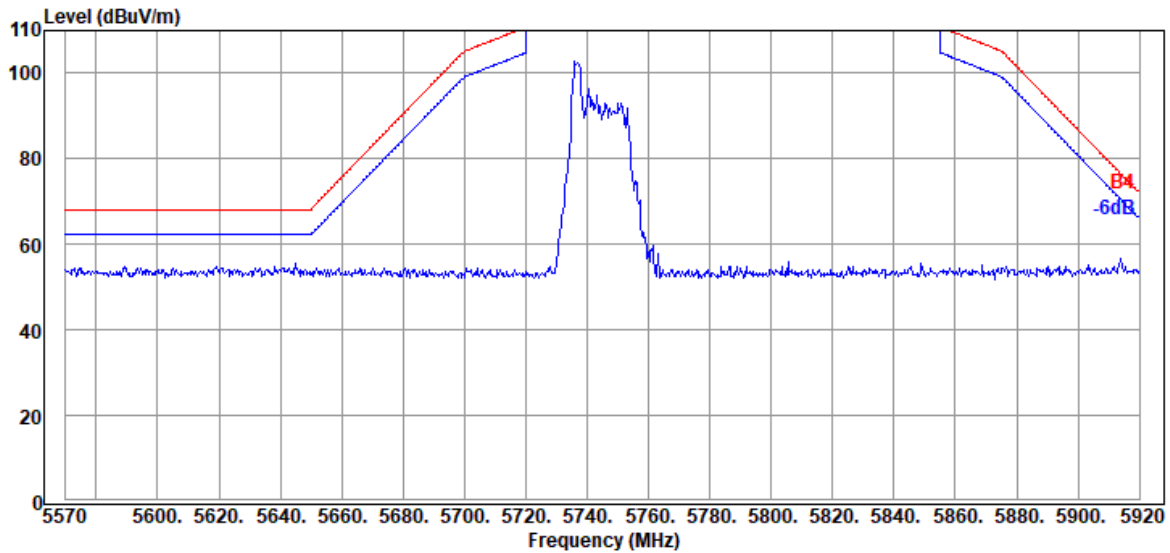


Antenna at Vertical Polarization

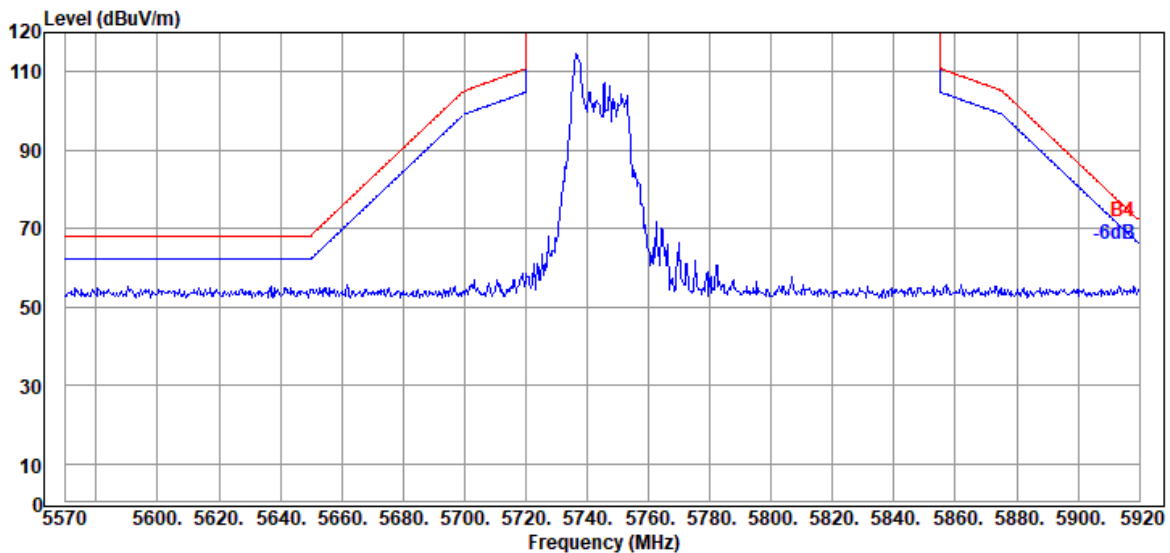


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

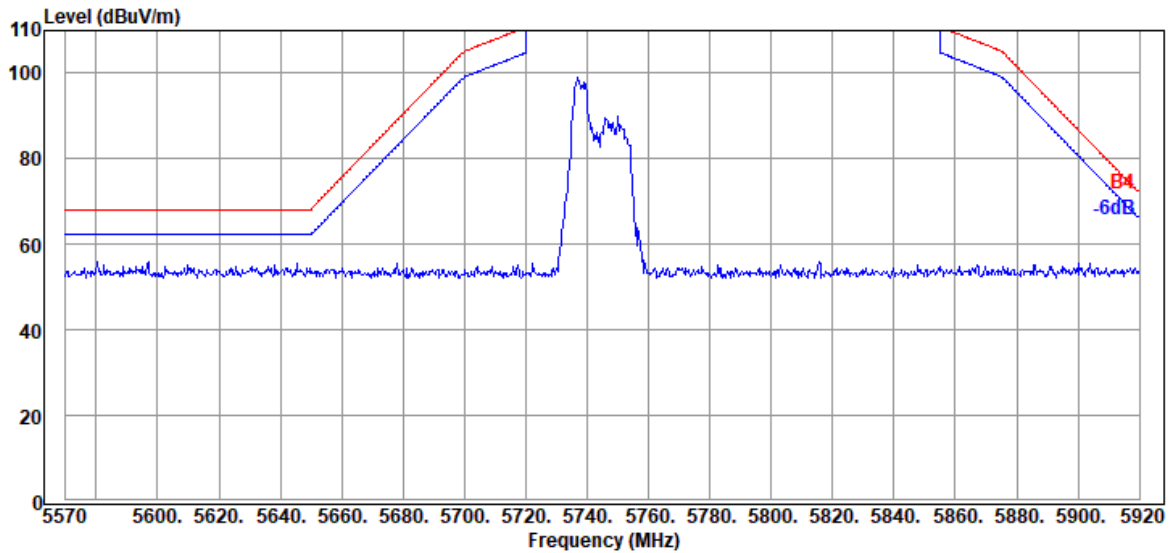


Antenna at Vertical Polarization

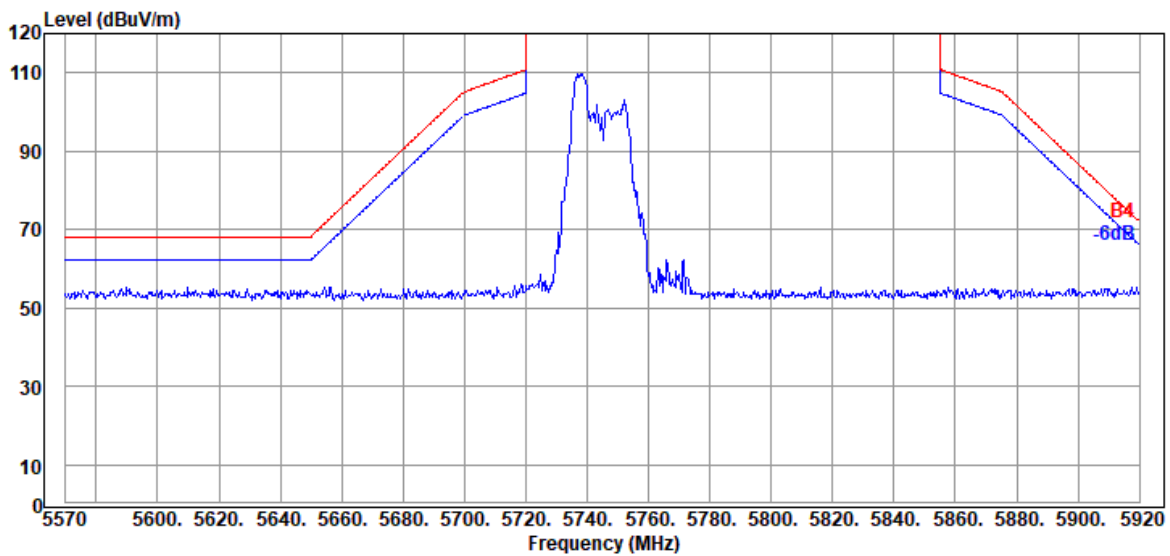


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

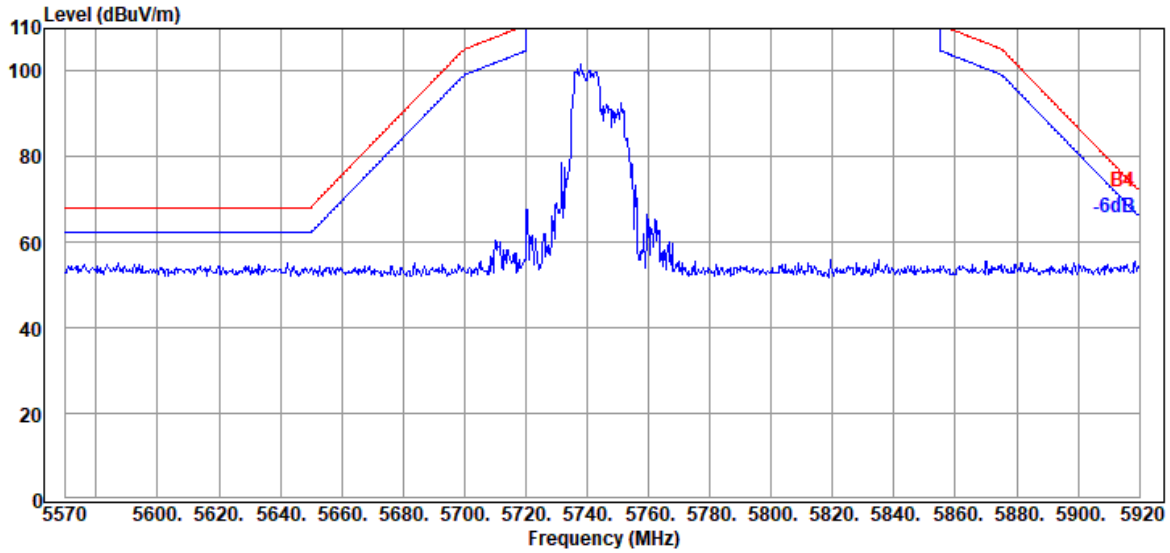


Antenna at Vertical Polarization

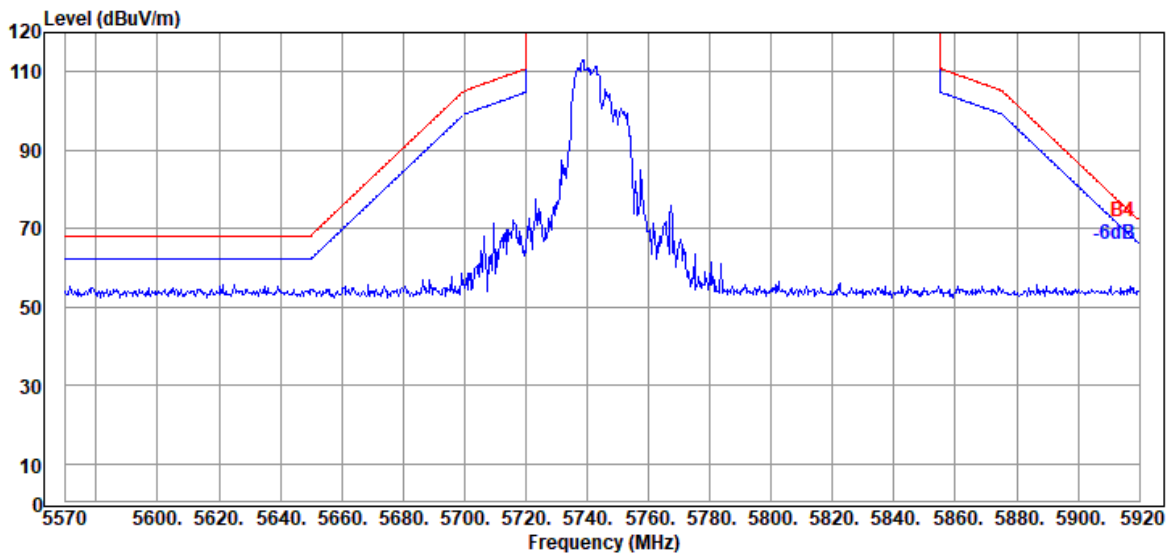


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

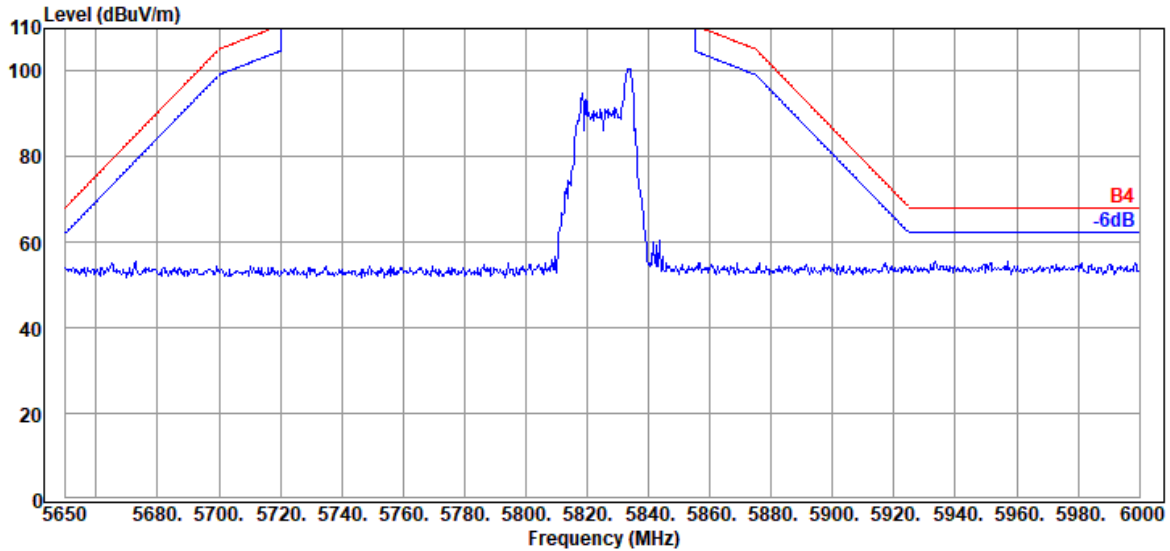


Antenna at Vertical Polarization

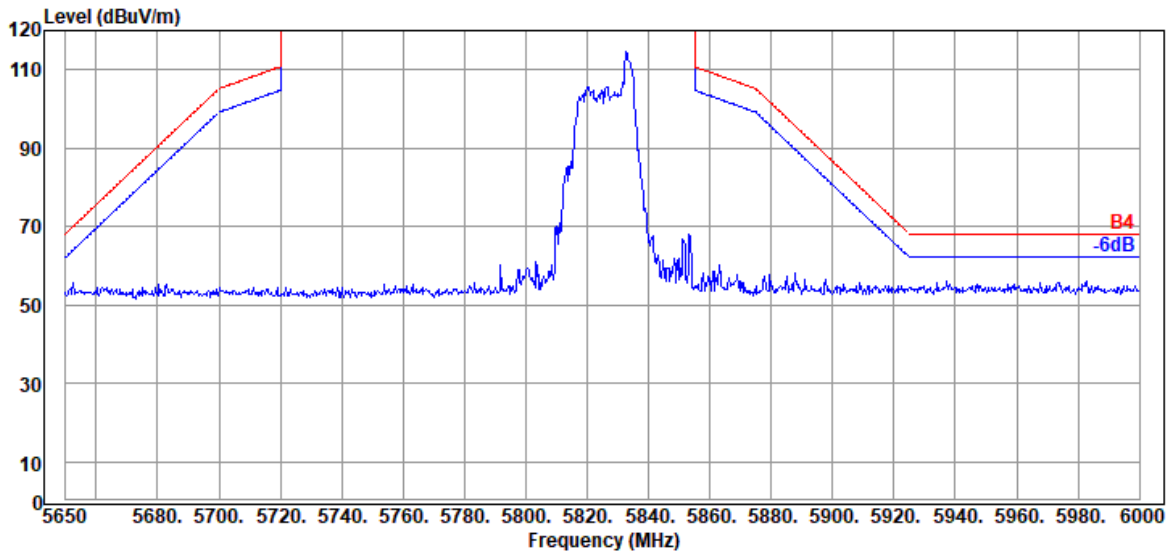


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

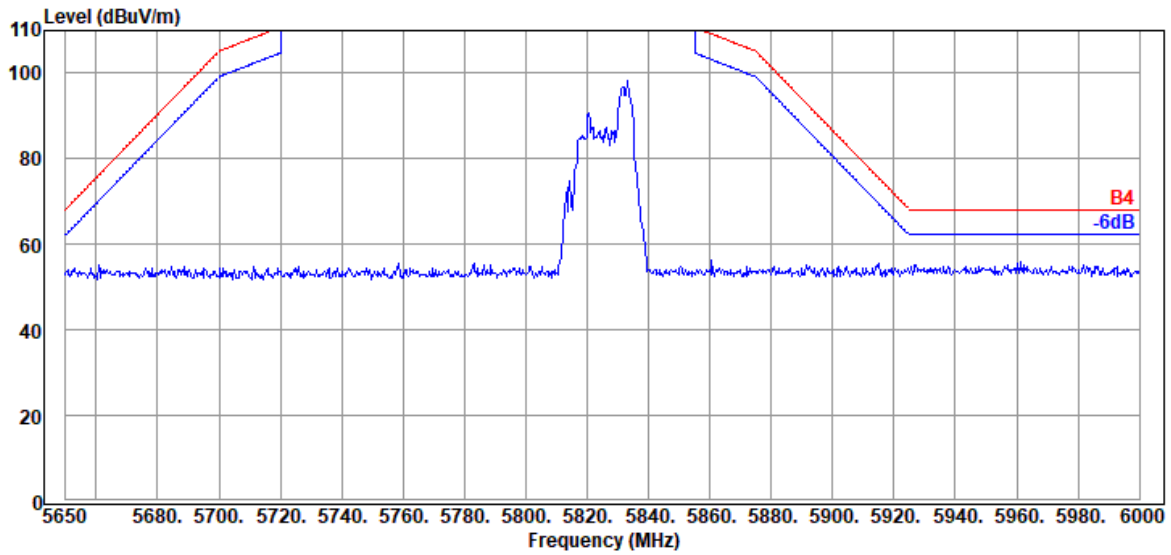


Antenna at Vertical Polarization

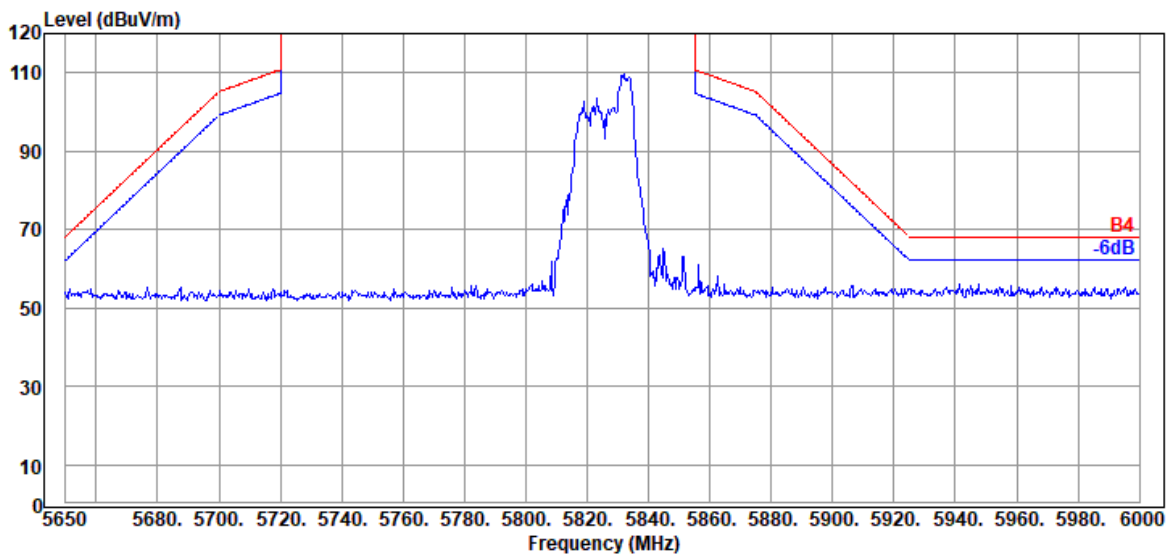


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

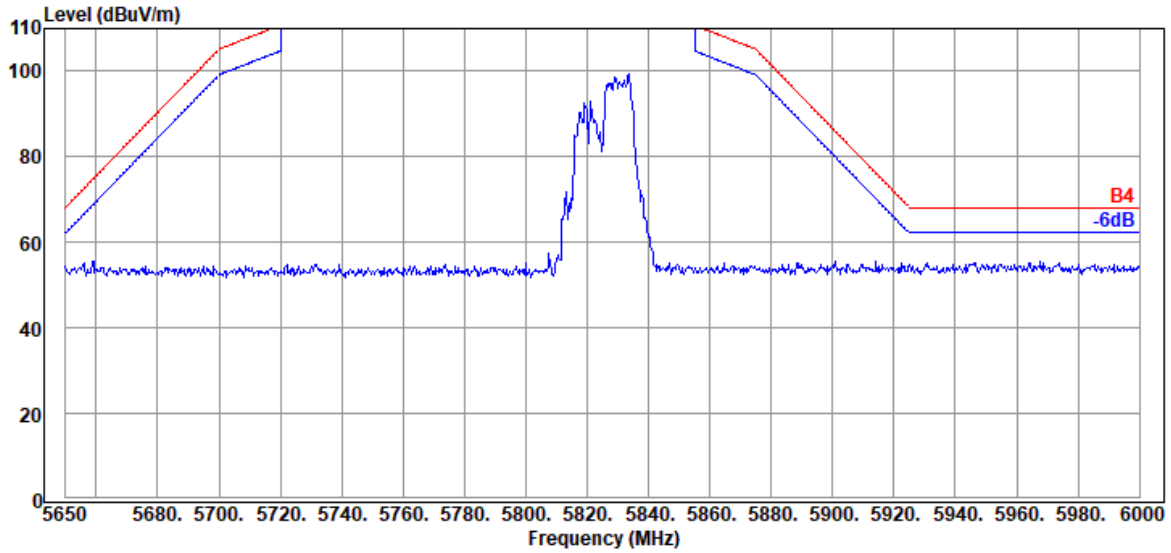

Antenna at Vertical Polarization

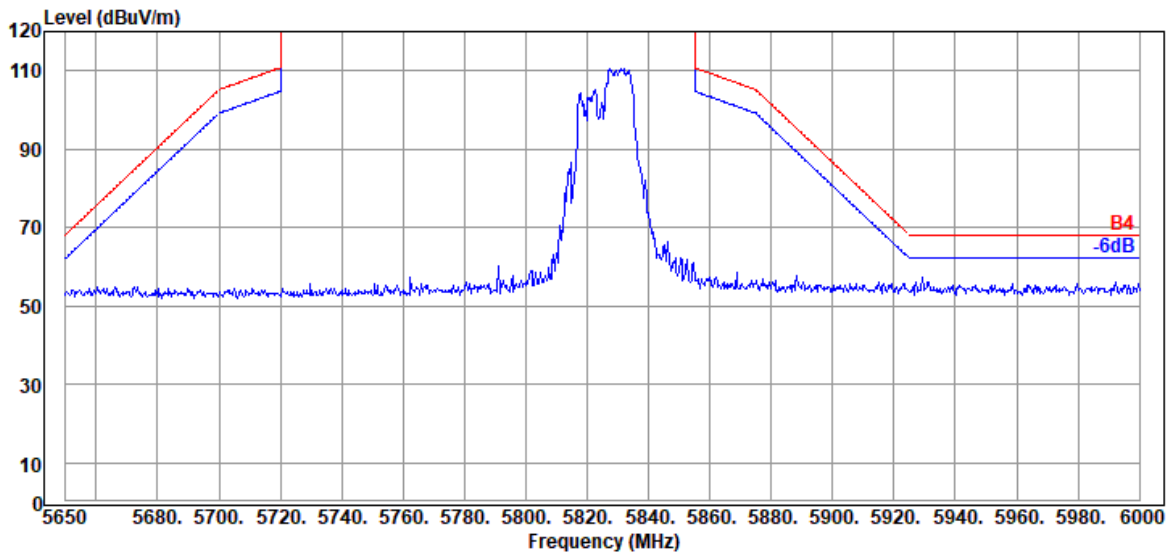


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

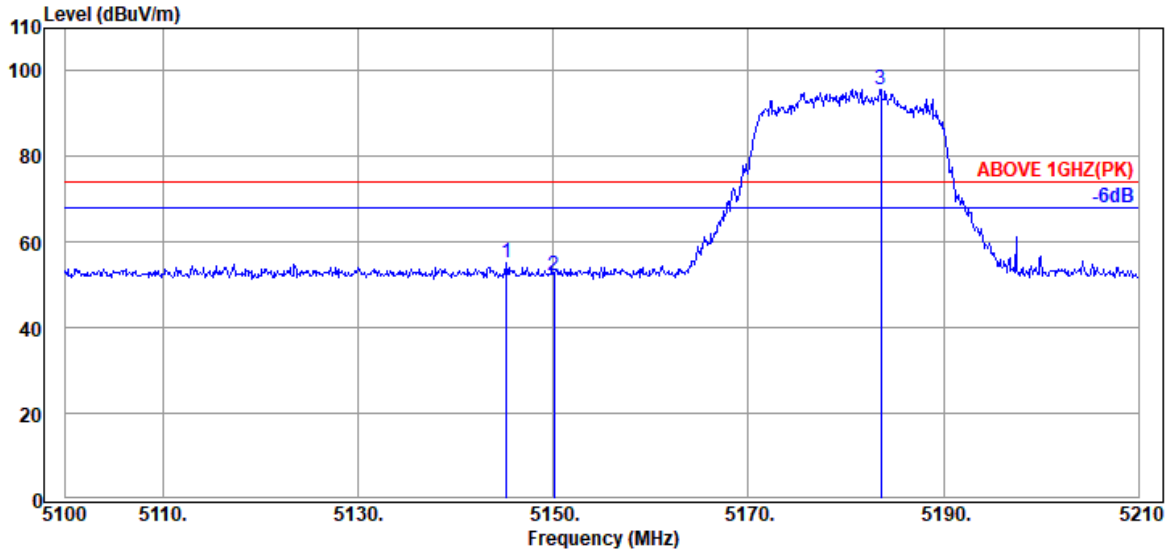

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.210	33.70	8.88	39.29	51.72	55.01	74.00	18.99	Peak
5150.050	33.70	8.88	39.29	49.04	52.33	74.00	21.67	Peak
@ 5183.600	33.70	8.90	39.28	92.28	95.60	---	---	Peak

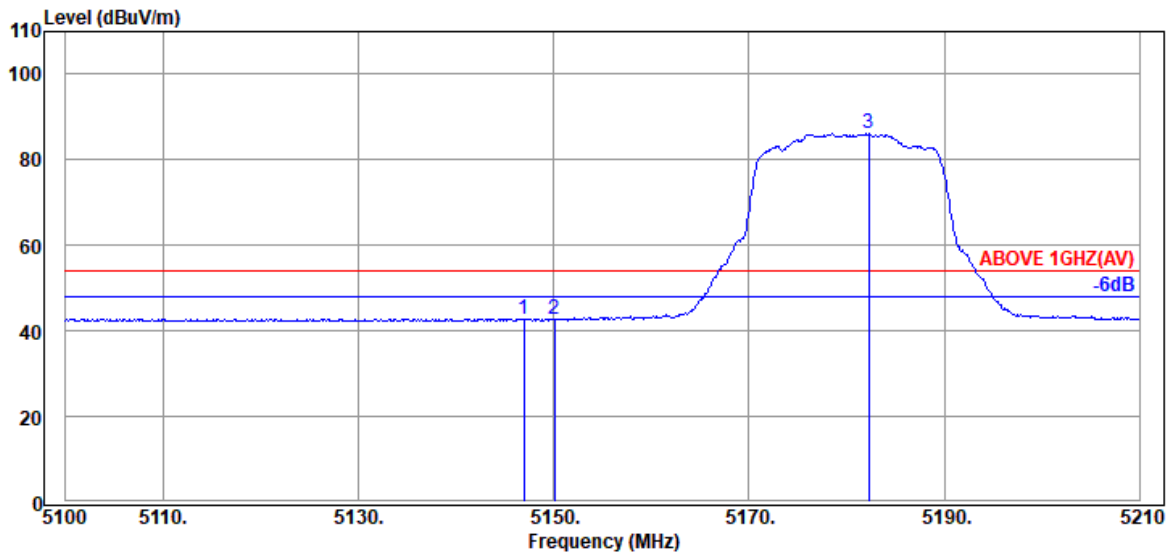


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.970	33.70	8.88	39.29	39.46	42.75	54.00	11.25	Average
5150.050	33.70	8.88	39.29	39.46	42.75	54.00	11.25	Average
@ 5182.280	33.70	8.90	39.28	82.73	86.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

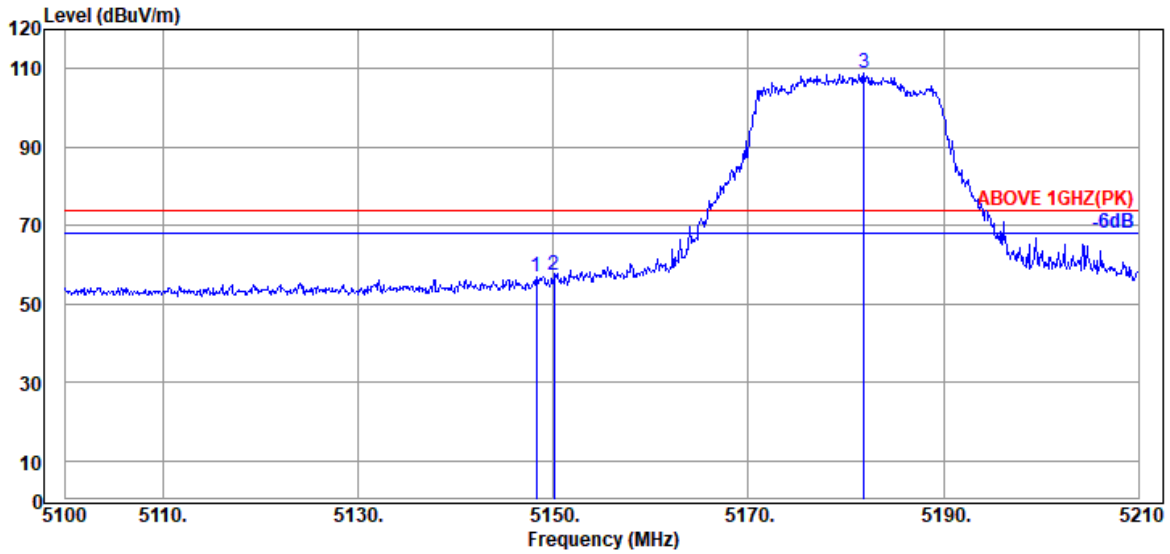

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.290	33.70	8.88	39.29	53.74	57.03	74.00	16.97	Peak
5150.050	33.70	8.88	39.29	53.85	57.14	74.00	16.86	Peak
@ 5181.840	33.70	8.90	39.28	105.36	108.68	---	---	Peak

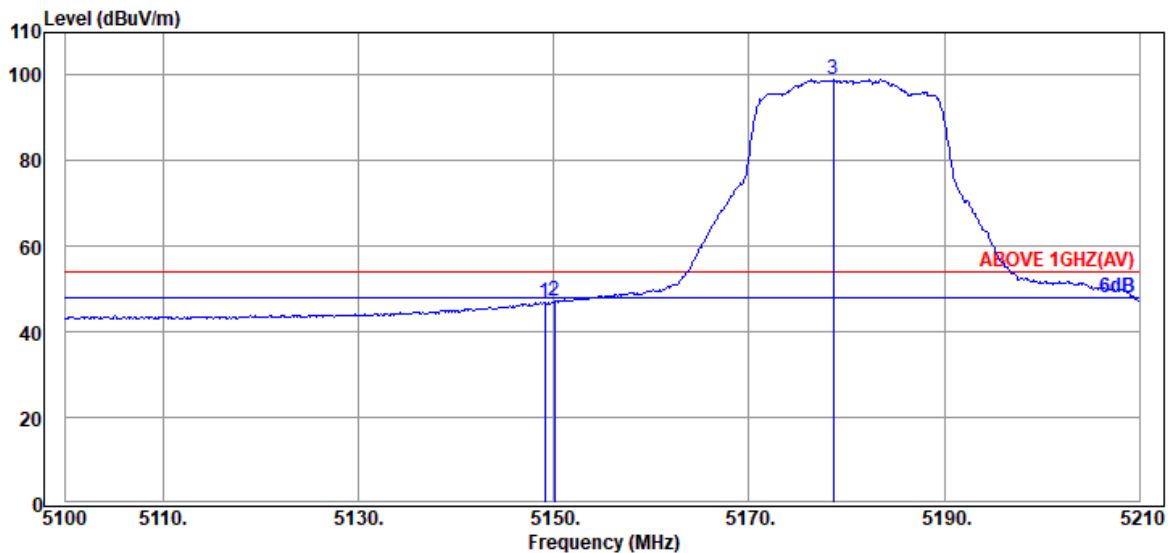


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	33.70	8.88	39.29	43.71	47.00	54.00	7.00	Average
5150.050	33.70	8.88	39.29	43.81	47.10	54.00	6.90	Average
@ 5178.650	33.70	8.90	39.28	95.63	98.95	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

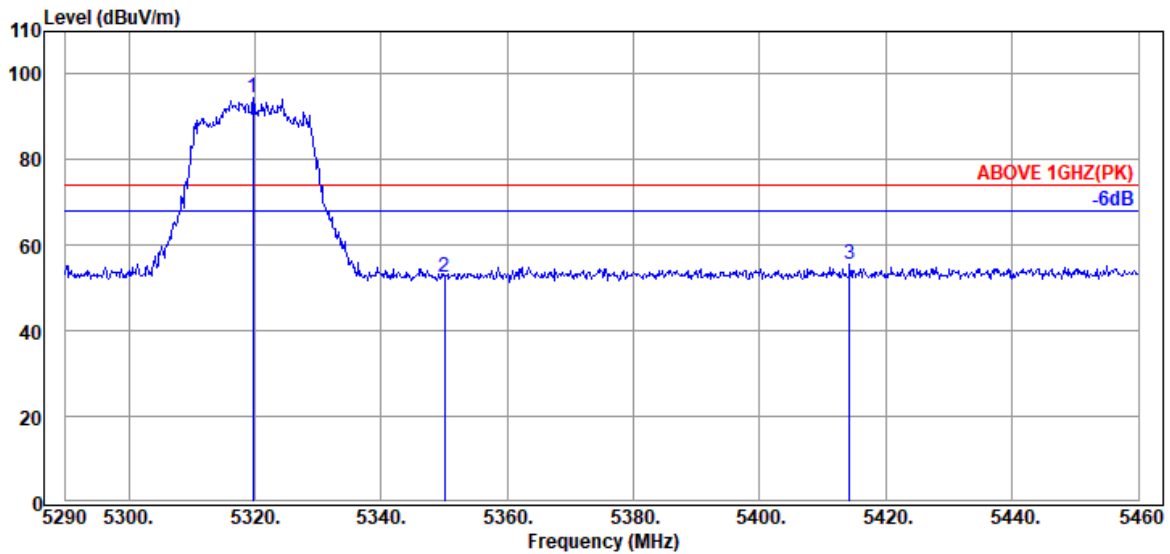

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.750	34.03	8.98	39.27	90.84	94.58	---	---	Peak
5350.010	33.90	8.99	39.27	48.78	52.40	74.00	21.60	Peak
5414.270	34.12	9.03	39.27	51.78	55.66	74.00	18.34	Peak

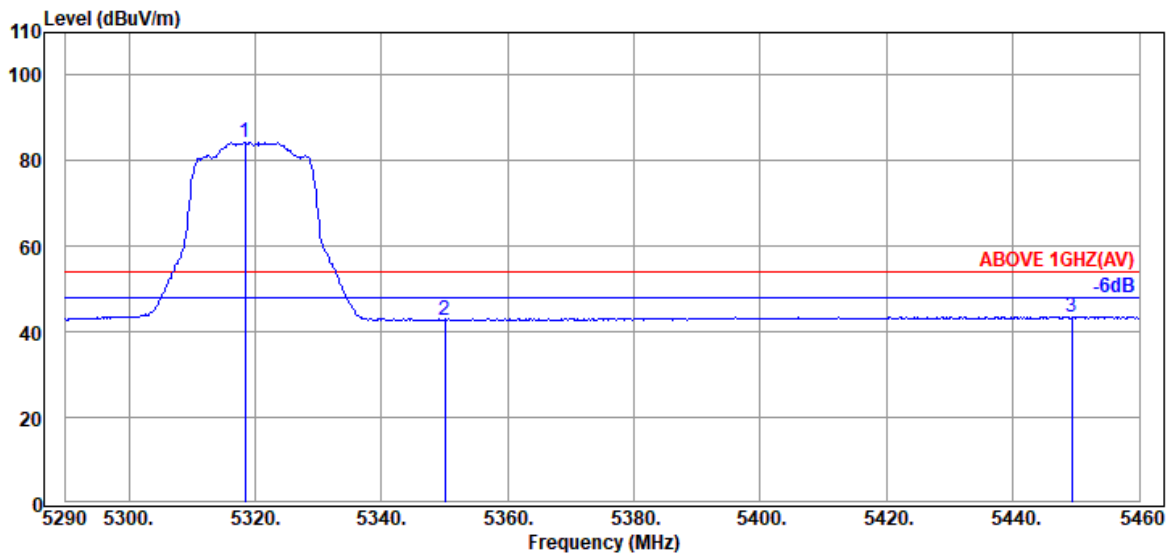


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.390	34.03	8.98	39.27	80.54	84.28	---	---	Average
5350.010	33.90	8.99	39.27	39.27	42.89	54.00	11.11	Average
5449.290	34.20	9.05	39.26	39.58	43.57	54.00	10.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

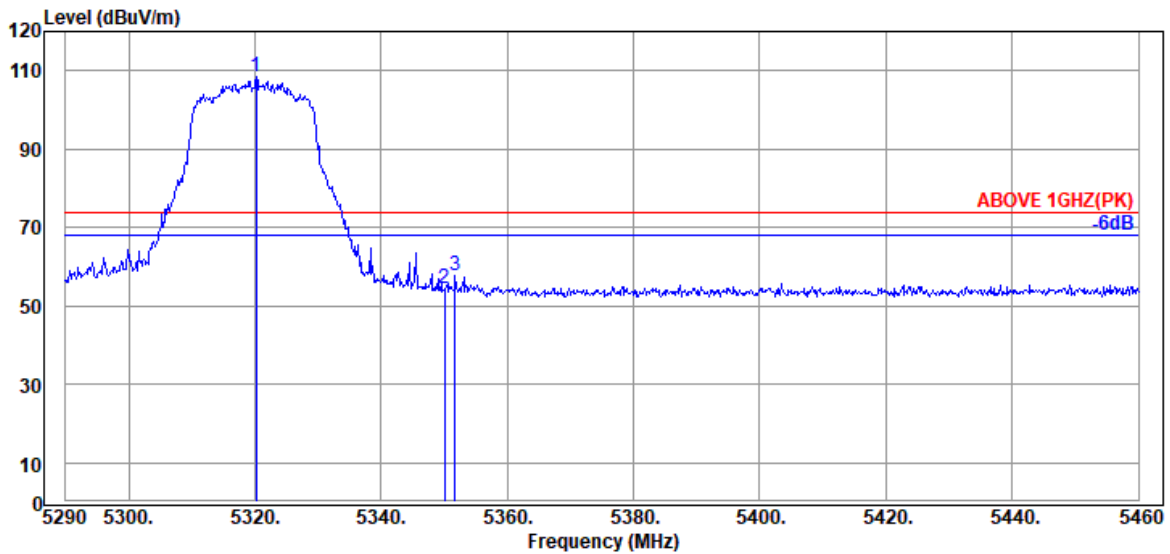

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.260	34.03	8.98	39.27	104.63	108.37	---	---	Peak
5350.010	33.90	8.99	39.27	50.80	54.42	74.00	19.58	Peak
5351.710	33.90	8.99	39.27	54.07	57.69	74.00	16.31	Peak

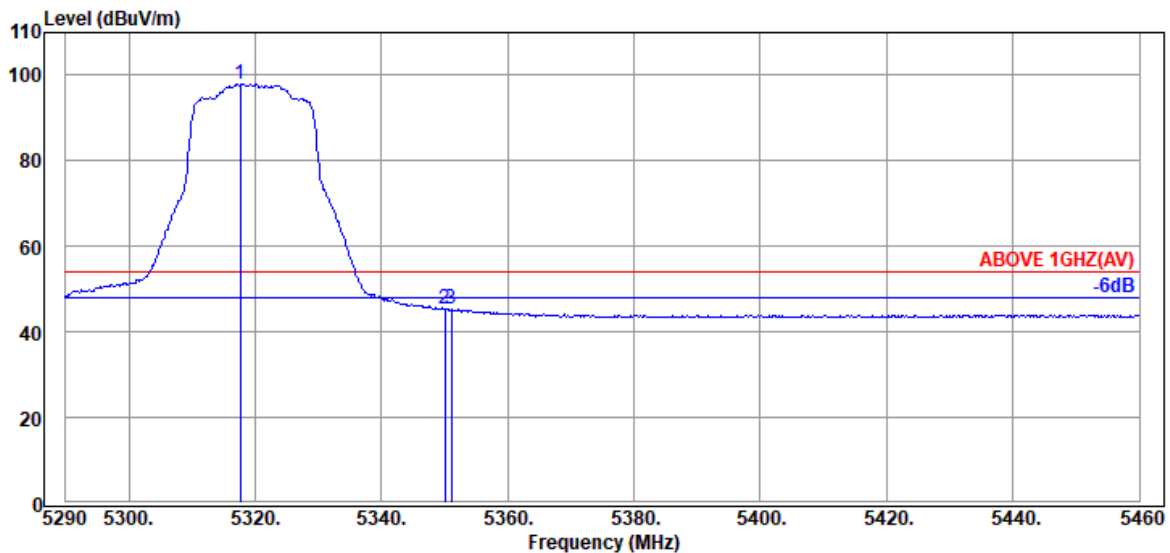


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.710	34.03	8.98	39.27	94.23	97.97	---	---	Average
5350.010	33.90	8.99	39.27	41.70	45.32	54.00	8.68	Average
5351.030	33.90	8.99	39.27	41.77	45.39	54.00	8.61	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

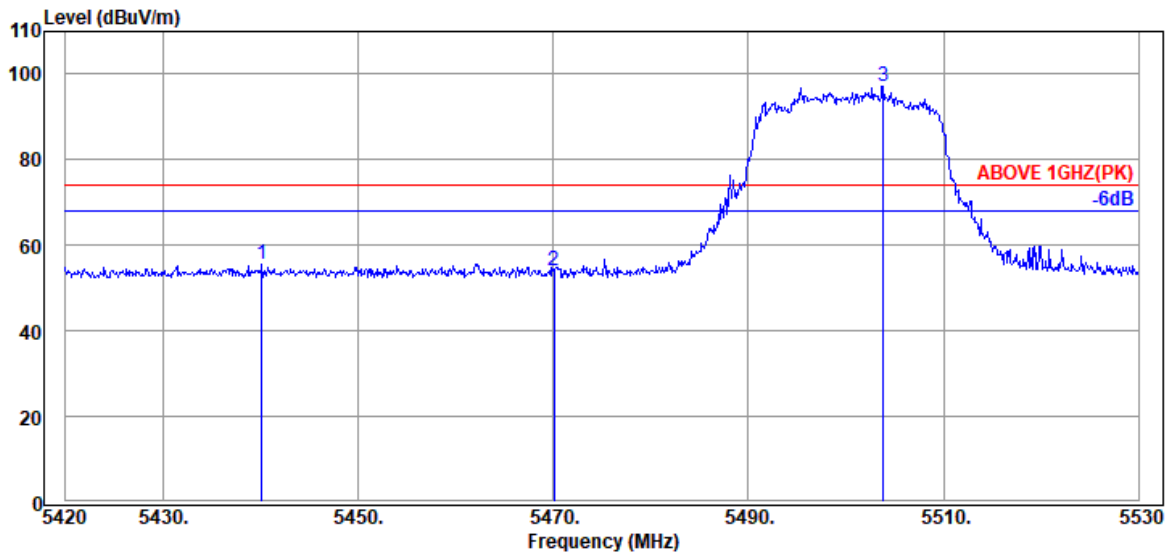

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.130	34.17	9.04	39.26	51.64	55.59	74.00	18.41	Peak
5470.050	34.17	9.06	39.26	50.17	54.14	74.00	19.86	Peak
@ 5503.820	34.10	9.08	39.26	93.25	97.17	---	---	Peak

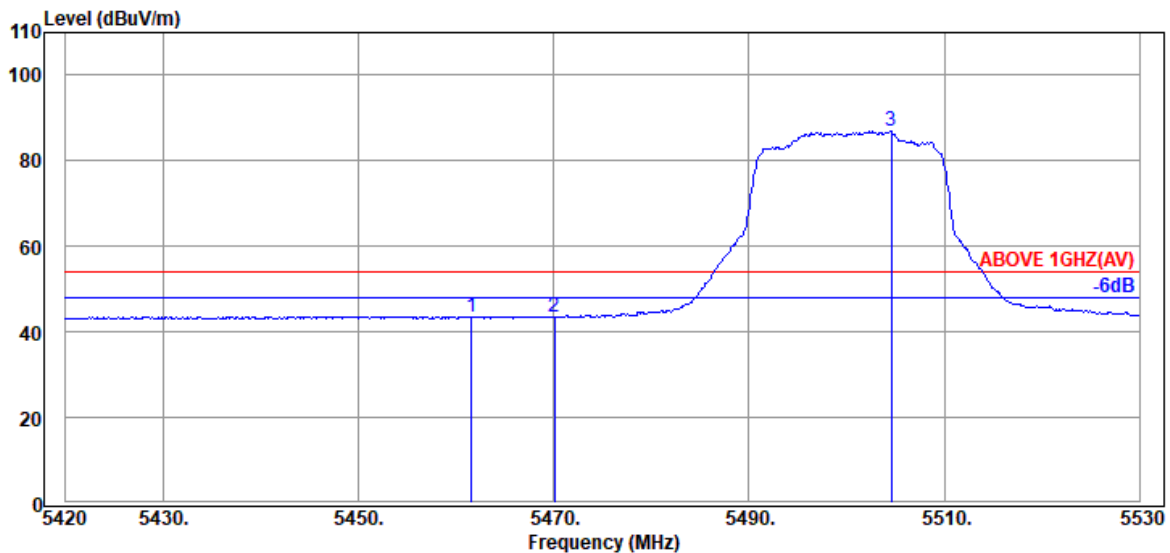


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.580	34.20	9.05	39.26	39.65	43.64	54.00	10.36	Average
5470.050	34.17	9.06	39.26	39.51	43.48	54.00	10.52	Average
@ 5504.590	34.10	9.08	39.26	82.98	86.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

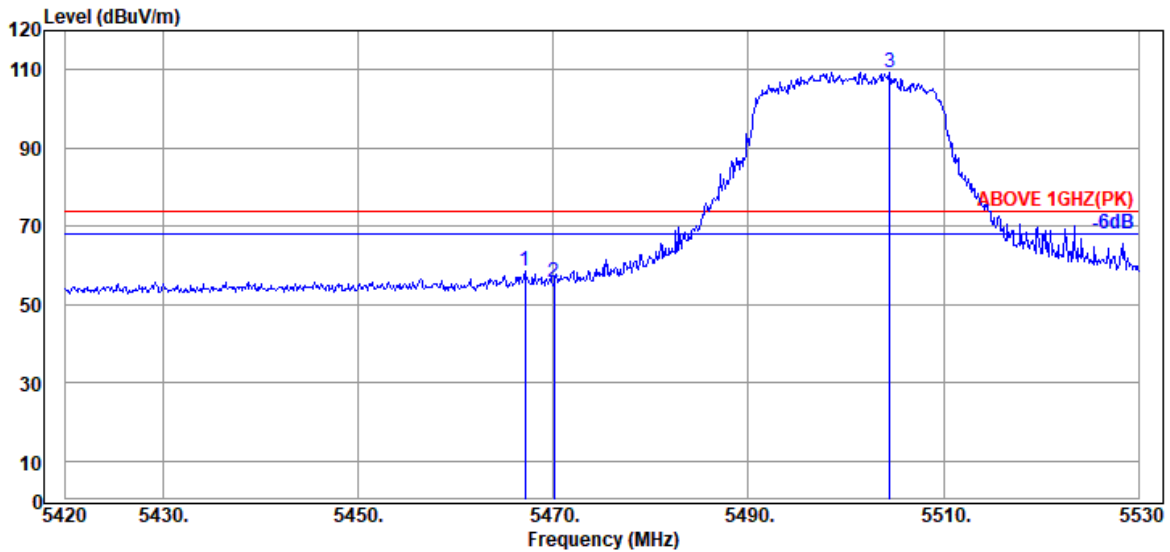

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.080	34.17	9.06	39.26	54.50	58.47	74.00	15.53	Peak
5470.050	34.17	9.06	39.26	51.54	55.51	74.00	18.49	Peak
@ 5504.480	34.10	9.08	39.26	105.54	109.46	---	---	Peak

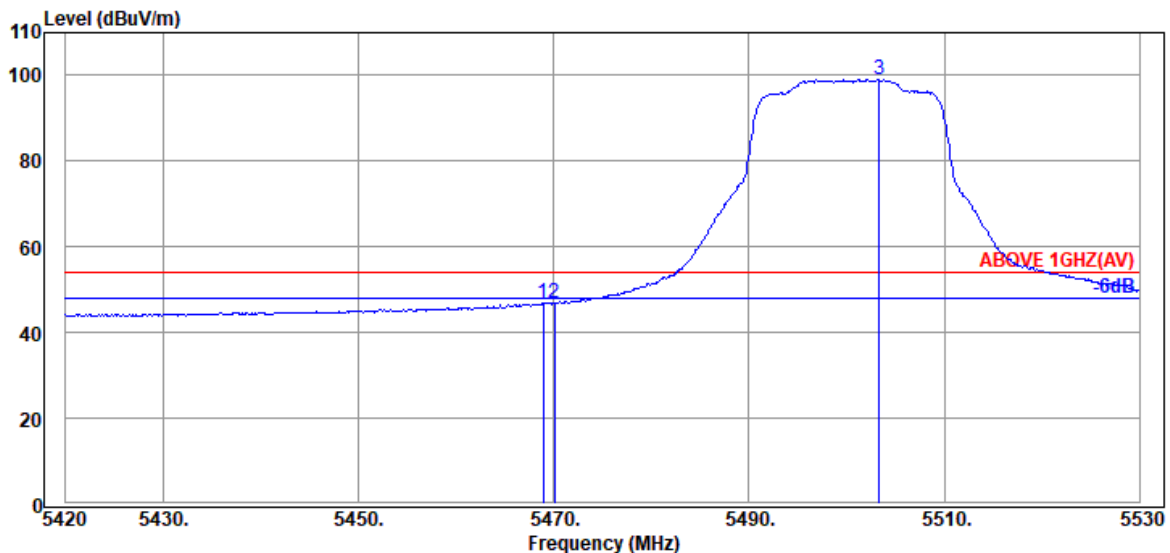


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.17	9.06	39.26	42.82	46.79	54.00	7.21	Average
5470.050	34.17	9.06	39.26	42.89	46.86	54.00	7.14	Average
@ 5503.380	34.10	9.08	39.26	95.00	98.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

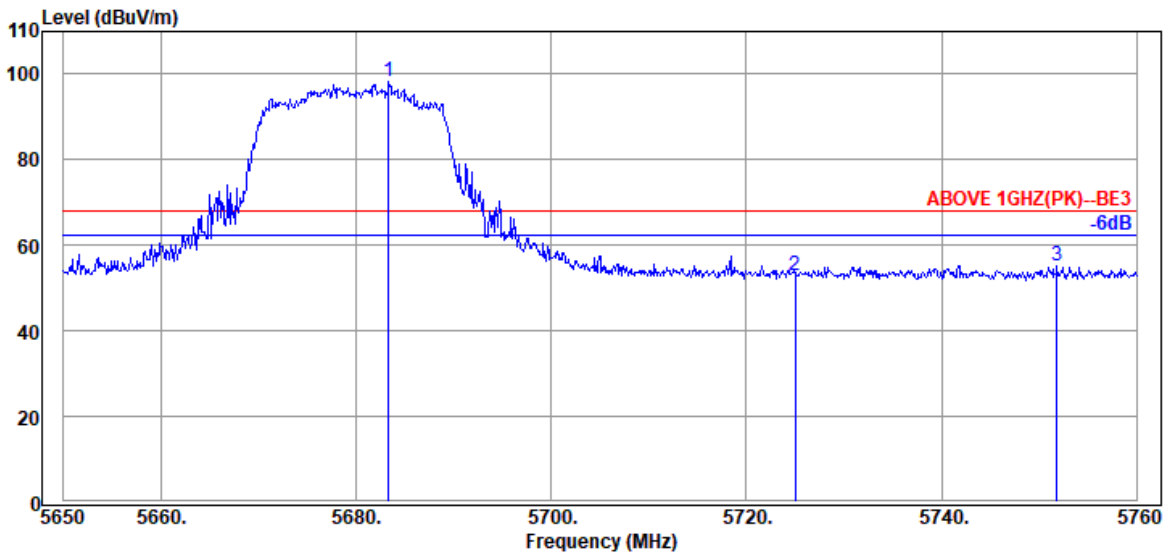

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.330	33.87	9.17	39.30	94.66	98.40	---	---	Peak
5725.020	33.80	9.20	39.30	49.14	52.84	68.20	15.36	Peak
5751.860	33.80	9.20	39.31	51.66	55.35	68.20	12.85	Peak

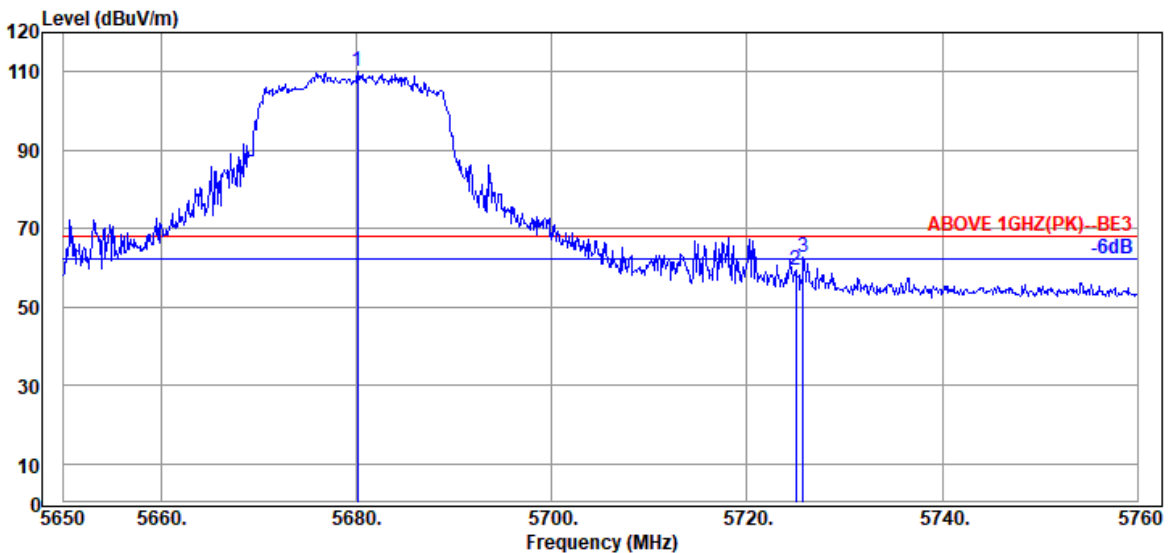


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.140	33.87	9.17	39.30	106.17	109.91	---	---	Peak
5725.020	33.80	9.20	39.30	55.52	59.22	68.20	8.98	Peak
5725.790	33.80	9.20	39.30	58.81	62.51	68.20	5.69	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

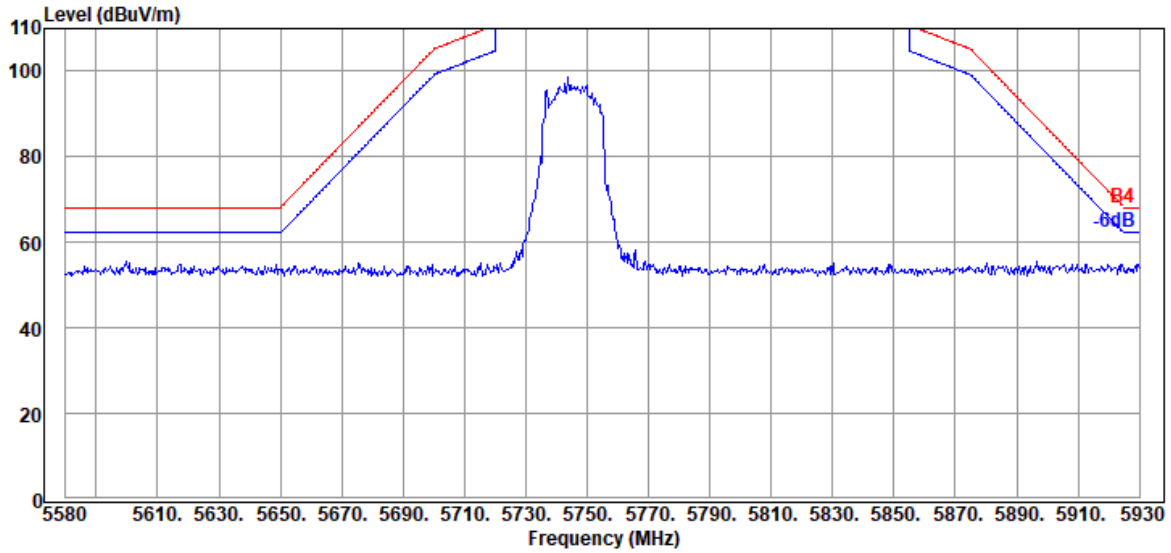


Antenna at Vertical Polarization

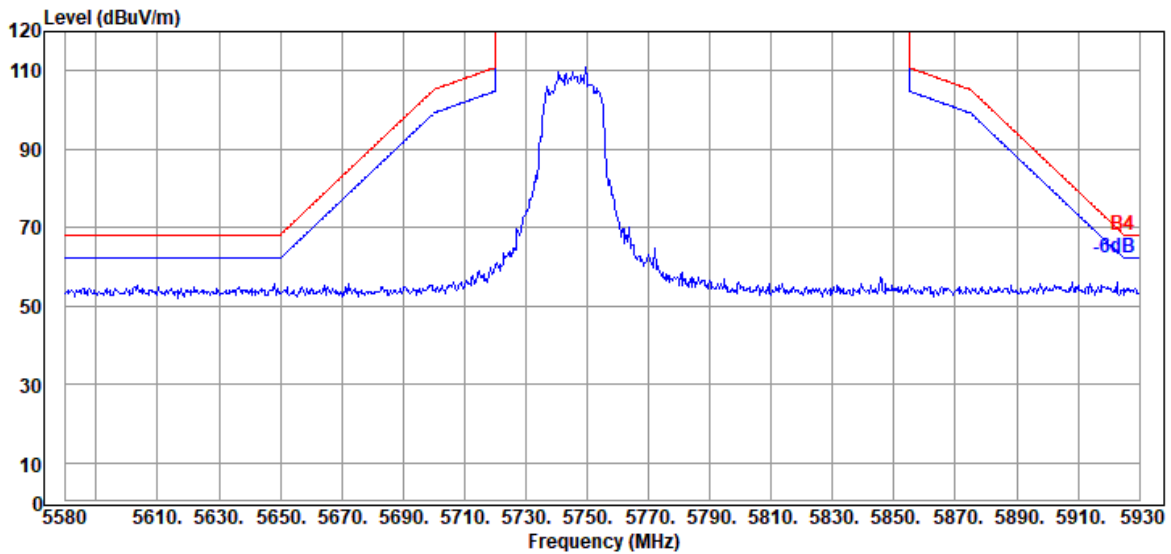


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

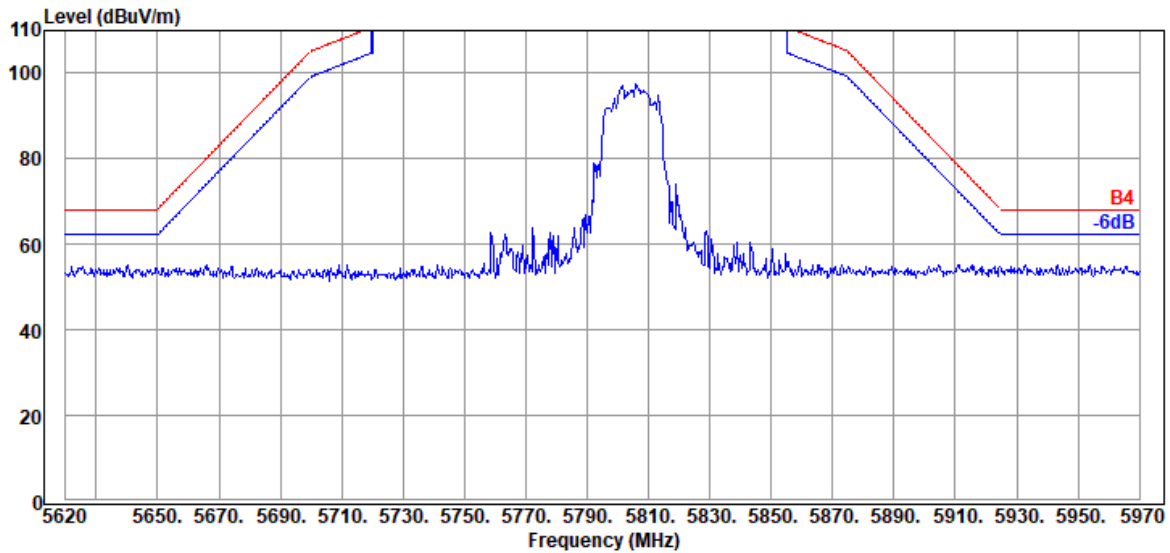

Antenna at Vertical Polarization

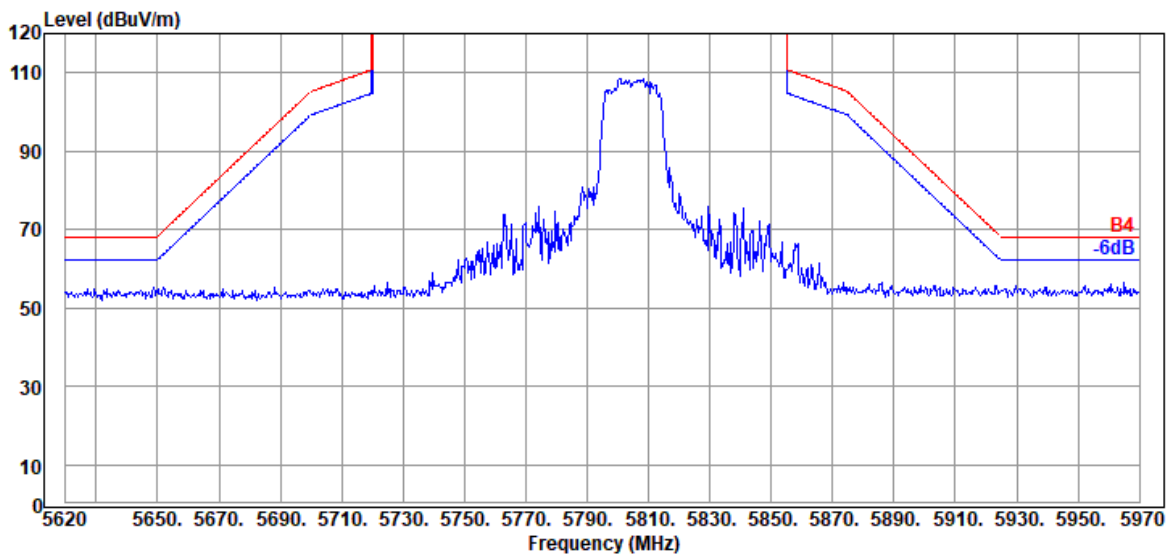


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

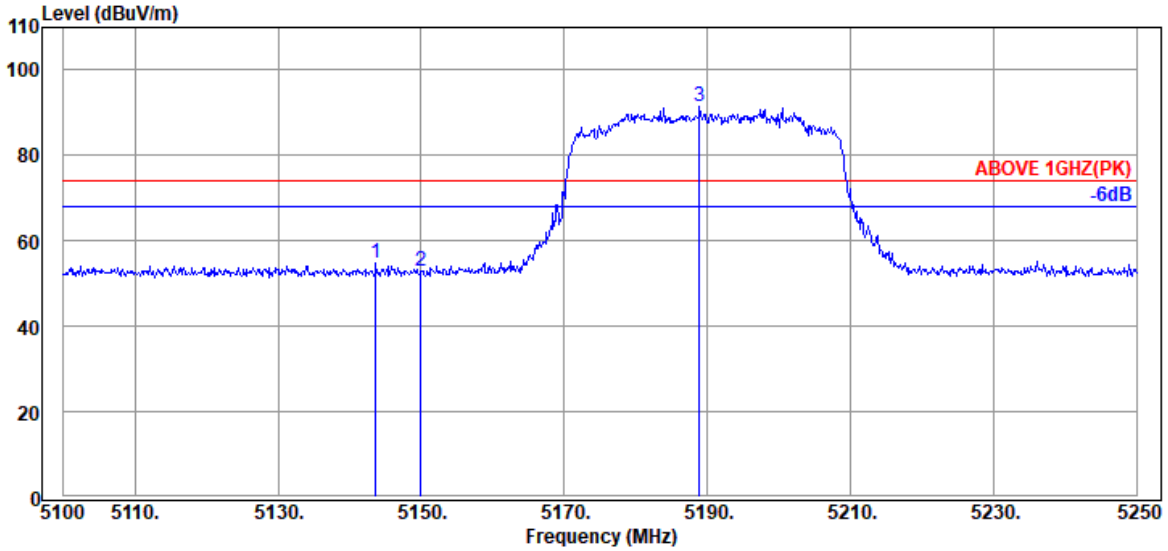

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.650	33.70	8.88	39.29	51.65	54.94	74.00	19.06	Peak
5149.950	33.70	8.88	39.29	49.46	52.75	74.00	21.25	Peak
@ 5188.950	33.70	8.91	39.28	88.11	91.44	---	---	Peak

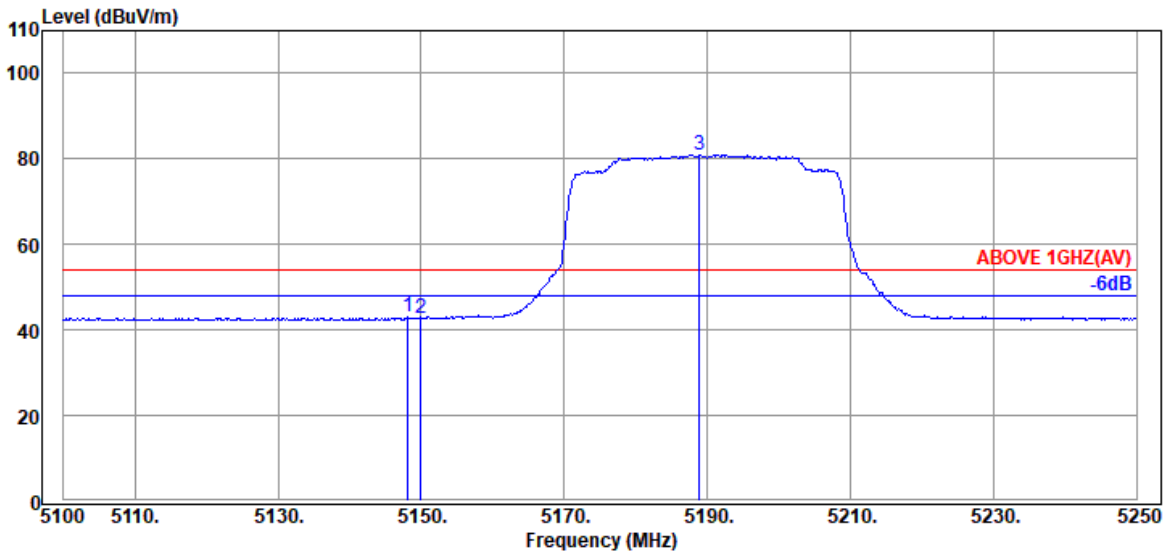


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.150	33.70	8.88	39.29	39.64	42.93	54.00	11.07	Average
5149.950	33.70	8.88	39.29	39.54	42.83	54.00	11.17	Average
@ 5188.950	33.70	8.91	39.28	77.67	81.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

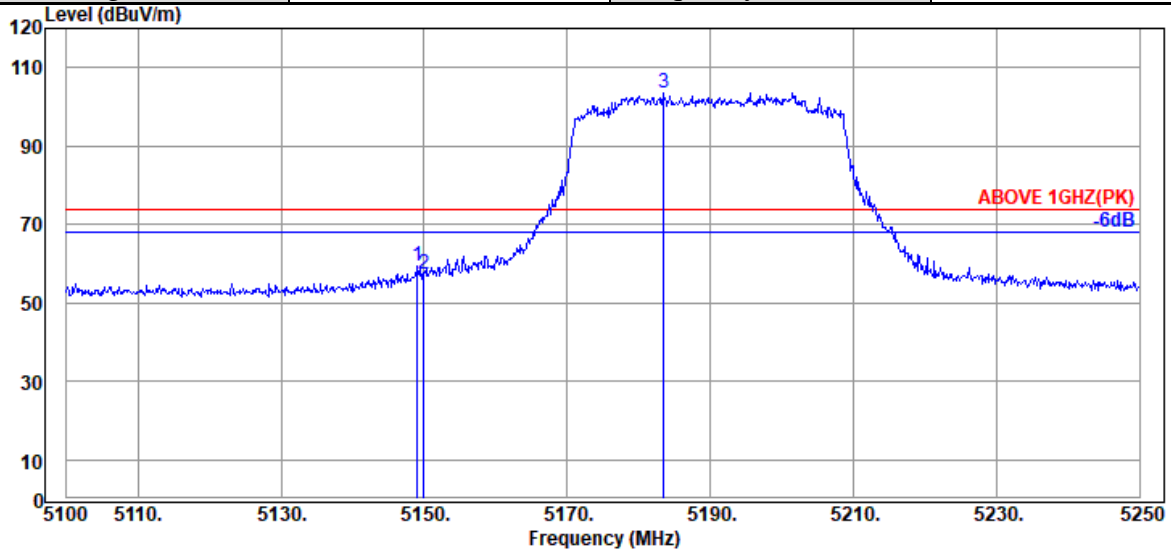

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	33.70	8.88	39.29	56.20	59.49	74.00	14.51	Peak
5149.950	33.70	8.88	39.29	54.12	57.41	74.00	16.59	Peak
@ 5183.550	33.70	8.90	39.28	100.27	103.59	---	---	Peak

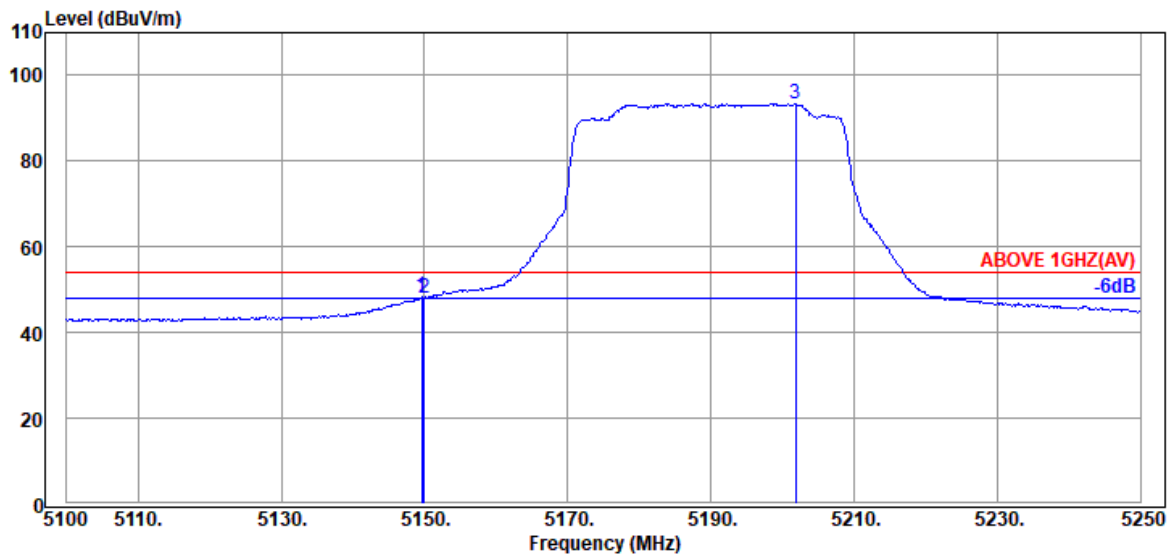


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.70	8.88	39.29	44.96	48.25	54.00	5.75	Average
5149.950	33.70	8.88	39.29	44.76	48.05	54.00	5.95	Average
@ 5201.850	33.72	8.92	39.28	90.09	93.45	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

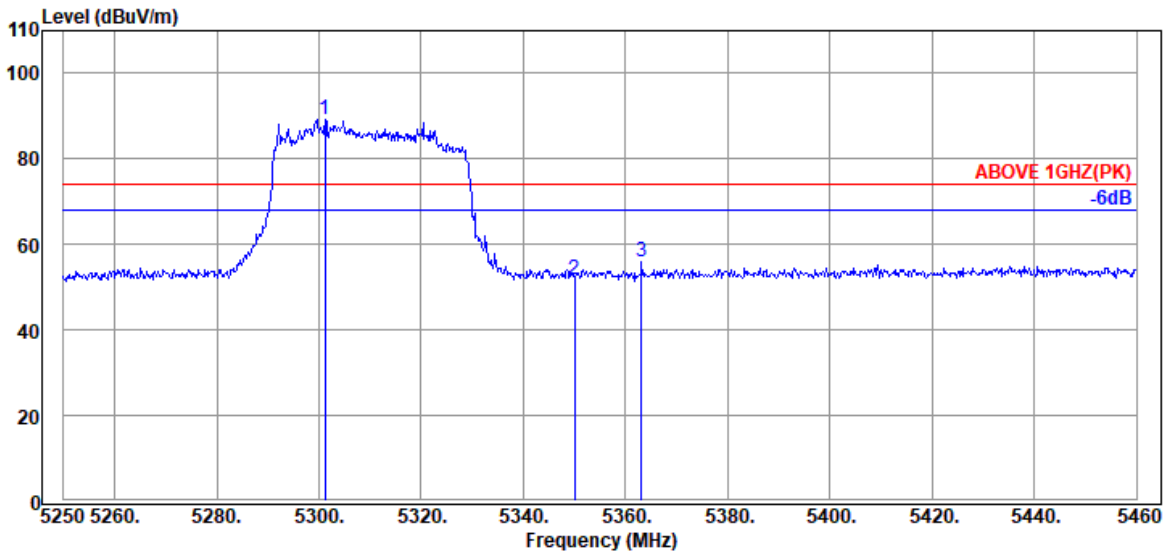

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.240	34.10	8.97	39.28	85.26	89.05	---	---	Peak
5349.960	33.90	8.99	39.27	48.02	51.64	74.00	22.36	Peak
5363.190	33.97	9.00	39.27	52.13	55.83	74.00	18.17	Peak

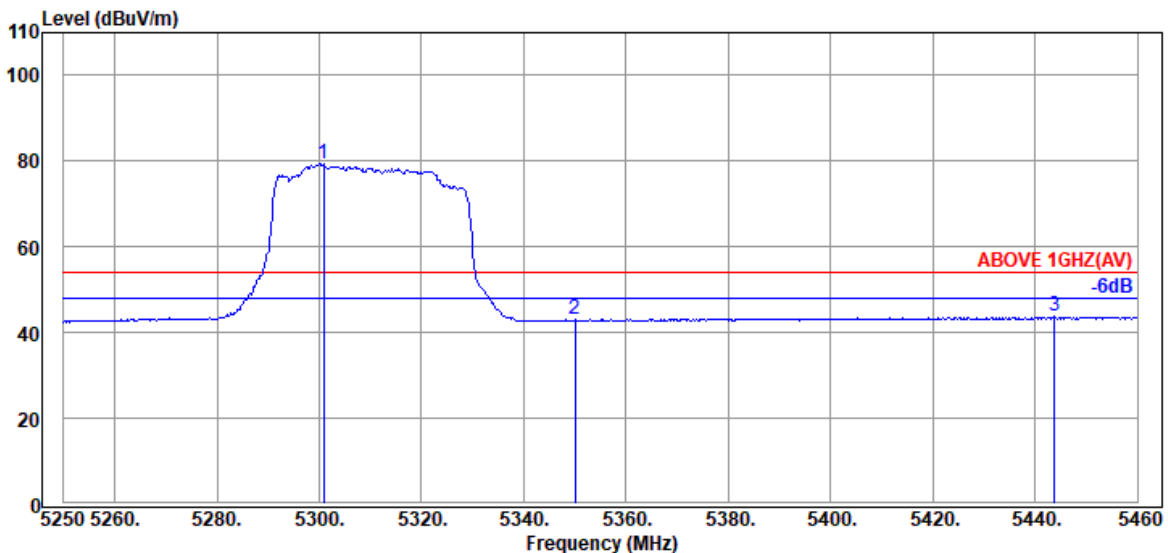


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.820	34.10	8.97	39.28	75.51	79.30	---	---	Average
5349.960	33.90	8.99	39.27	39.30	42.92	54.00	11.08	Average
5443.830	34.17	9.04	39.26	39.72	43.67	54.00	10.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

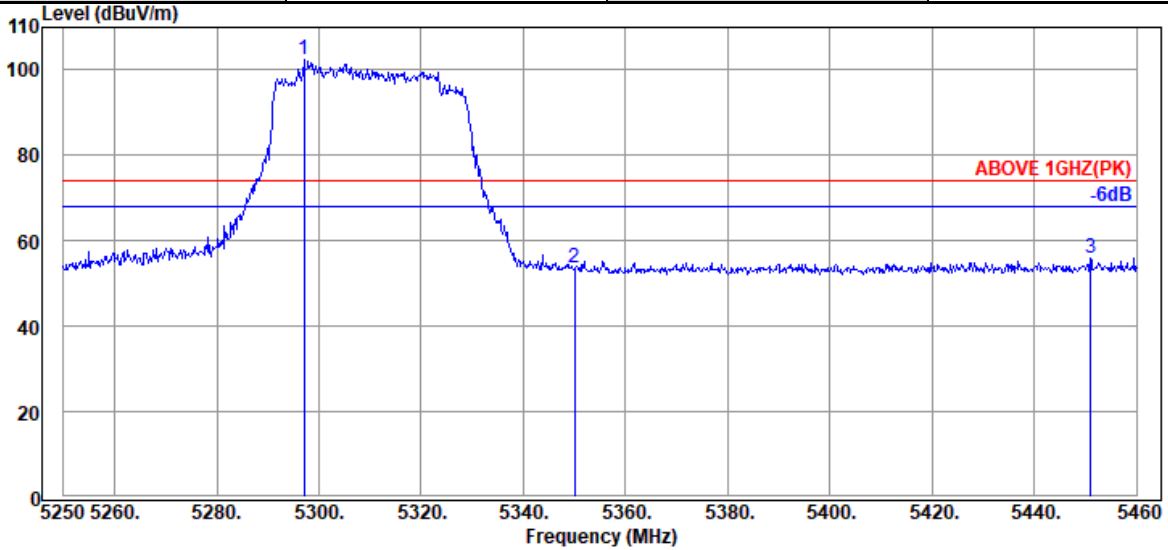

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.040	34.10	8.97	39.28	98.48	102.27	---	---	Peak
5349.960	33.90	8.99	39.27	50.01	53.63	74.00	20.37	Peak
5450.970	34.20	9.05	39.26	52.07	56.06	74.00	17.94	Peak

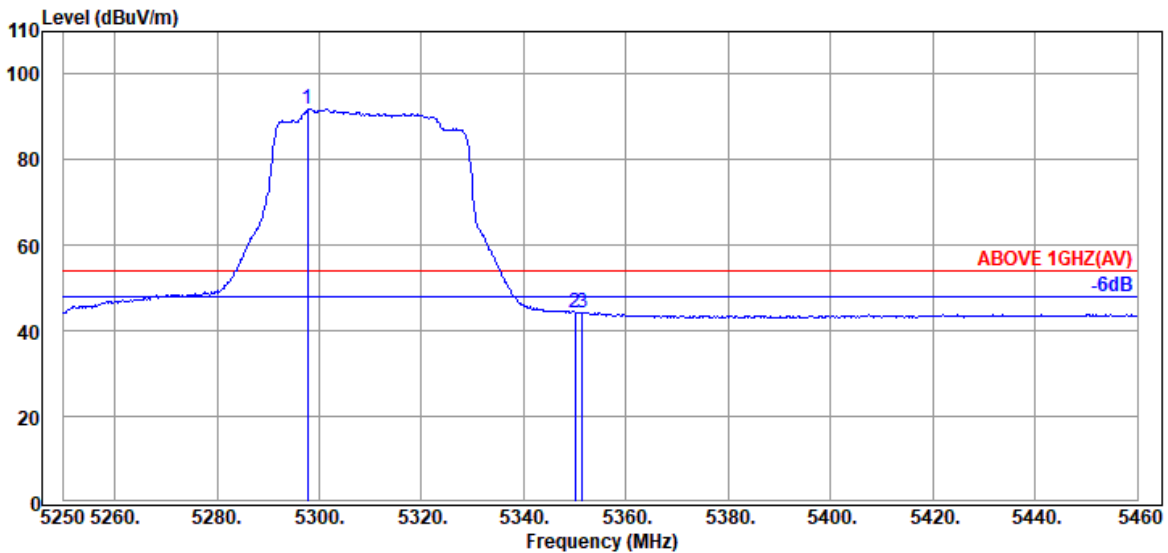


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.670	34.10	8.97	39.28	88.12	91.91	---	---	Average
5349.960	33.90	8.99	39.27	40.60	44.22	54.00	9.78	Average
5351.430	33.90	8.99	39.27	40.75	44.37	54.00	9.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

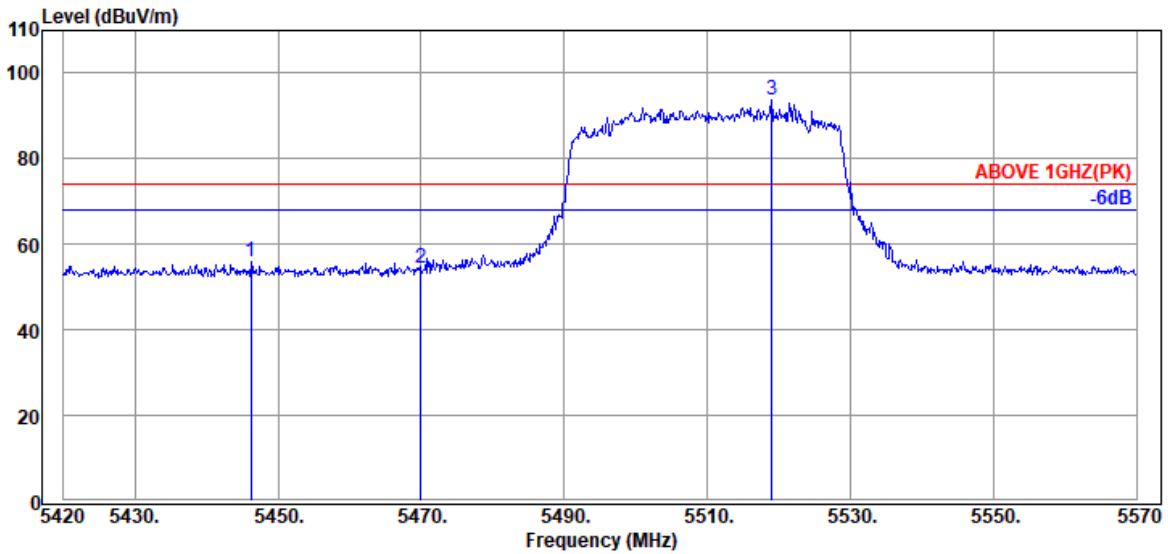

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.250	34.17	9.04	39.26	51.85	55.80	74.00	18.20	Peak
5469.950	34.17	9.06	39.26	50.33	54.30	74.00	19.70	Peak
@ 5519.000	34.10	9.09	39.26	89.76	93.69	---	---	Peak

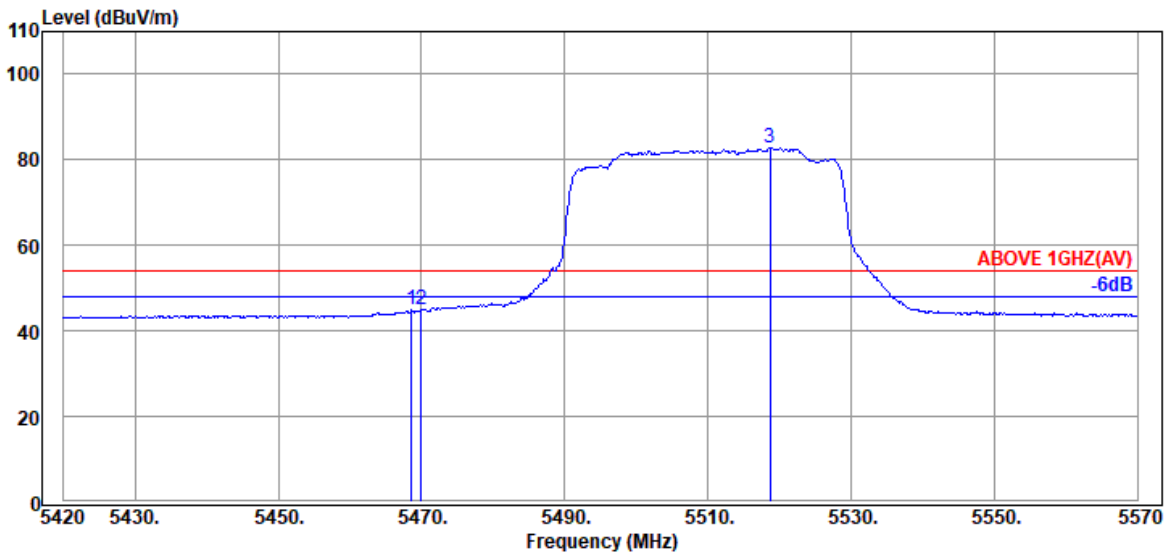


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.17	9.06	39.26	40.85	44.82	54.00	9.18	Average
5469.950	34.17	9.06	39.26	40.86	44.83	54.00	9.17	Average
@ 5518.700	34.10	9.09	39.26	78.84	82.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

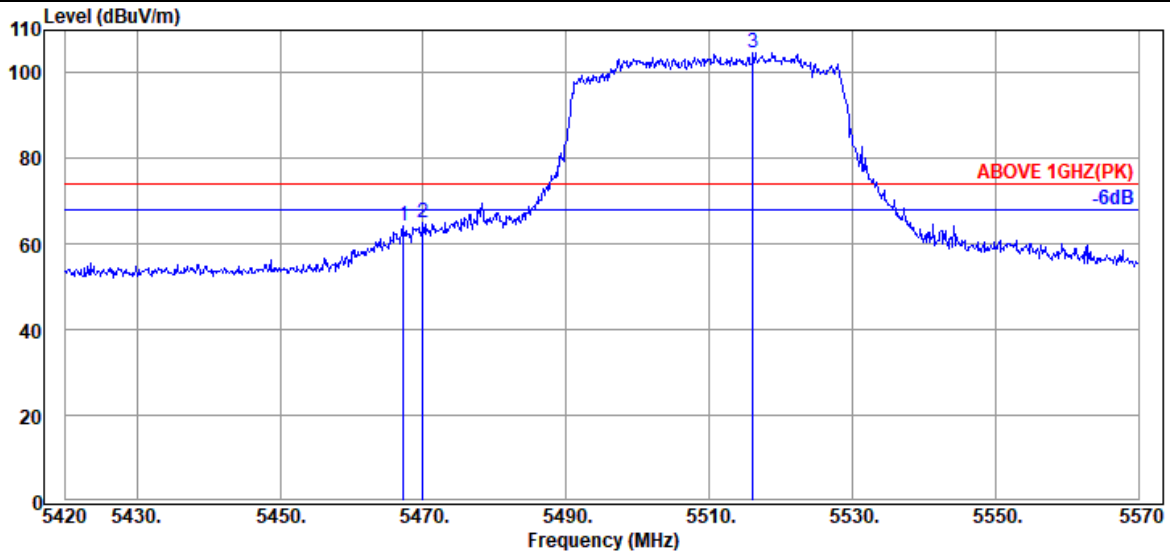

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.17	9.06	39.26	60.24	64.21	74.00	9.79	Peak
5469.950	34.17	9.06	39.26	61.17	65.14	74.00	8.86	Peak
@ 5516.150	34.10	9.09	39.26	100.90	104.83	---	---	Peak

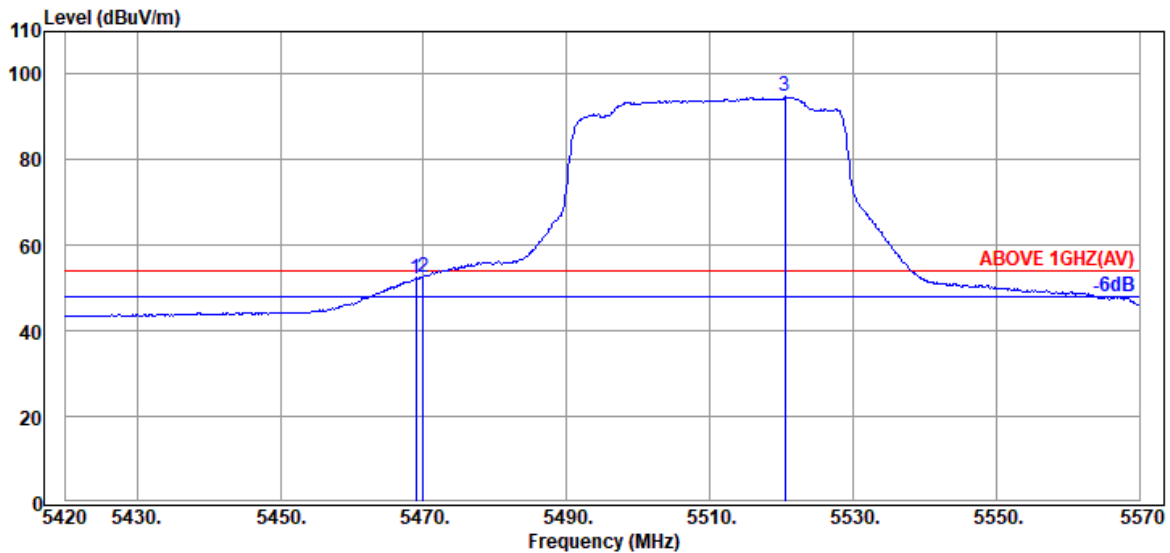


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.17	9.06	39.26	48.32	52.29	54.00	1.71	Average
5469.950	34.17	9.06	39.26	48.52	52.49	54.00	1.51	Average
@ 5520.500	34.10	9.09	39.26	90.88	94.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

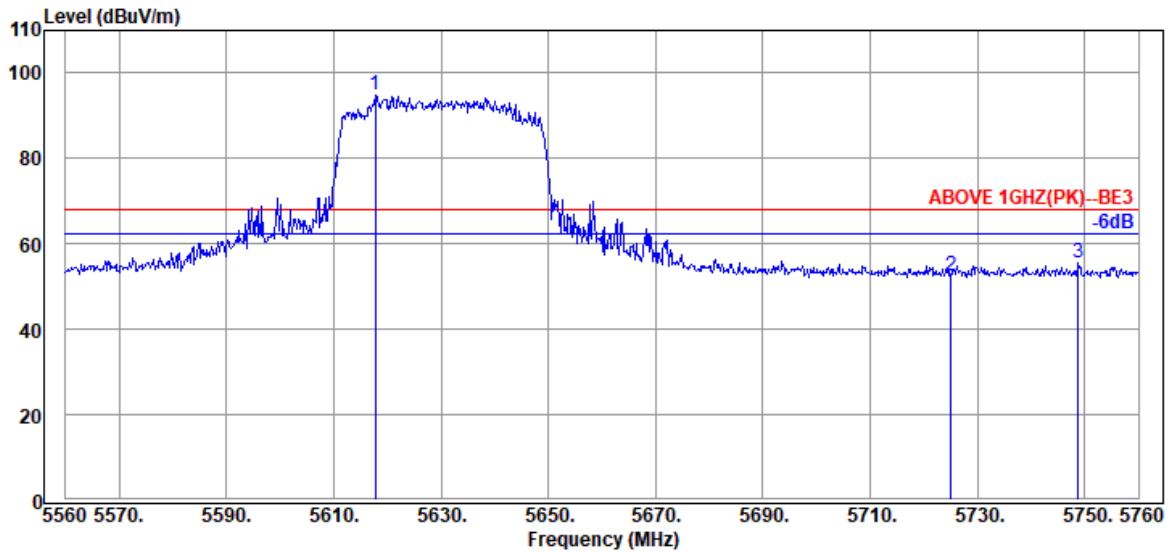

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5617.800	34.00	9.14	39.29	91.13	94.98	---	---	Peak
5725.000	33.80	9.20	39.30	48.82	52.52	68.20	15.68	Peak
5748.800	33.80	9.20	39.31	51.90	55.59	68.20	12.61	Peak

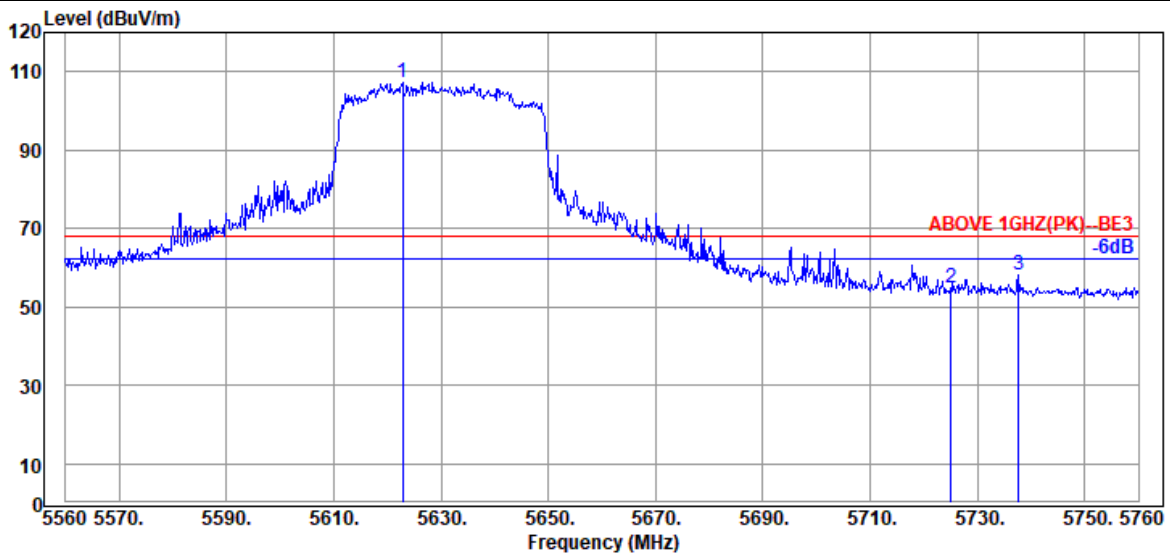


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.800	34.00	9.14	39.29	103.43	107.28	---	---	Peak
5725.000	33.80	9.20	39.30	51.23	54.93	68.20	13.27	Peak
5737.600	33.80	9.20	39.31	54.56	58.25	68.20	9.95	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

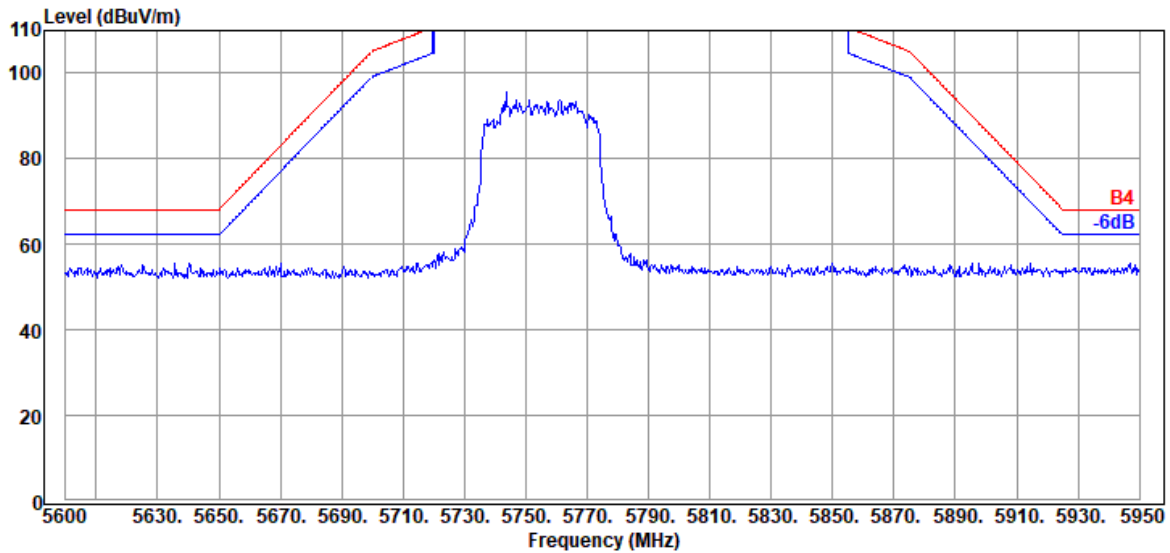


Antenna at Vertical Polarization

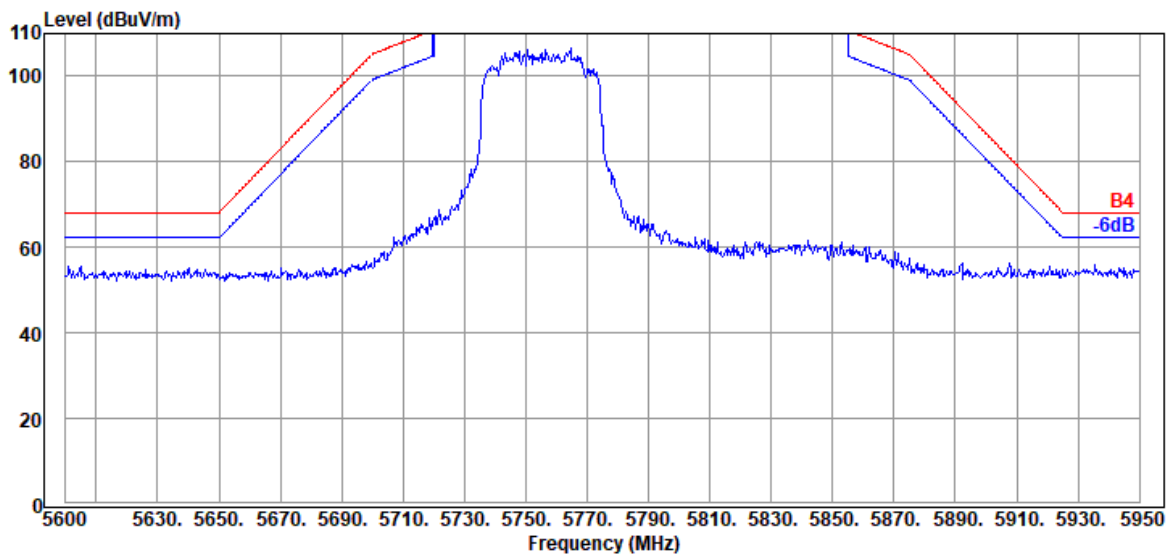


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

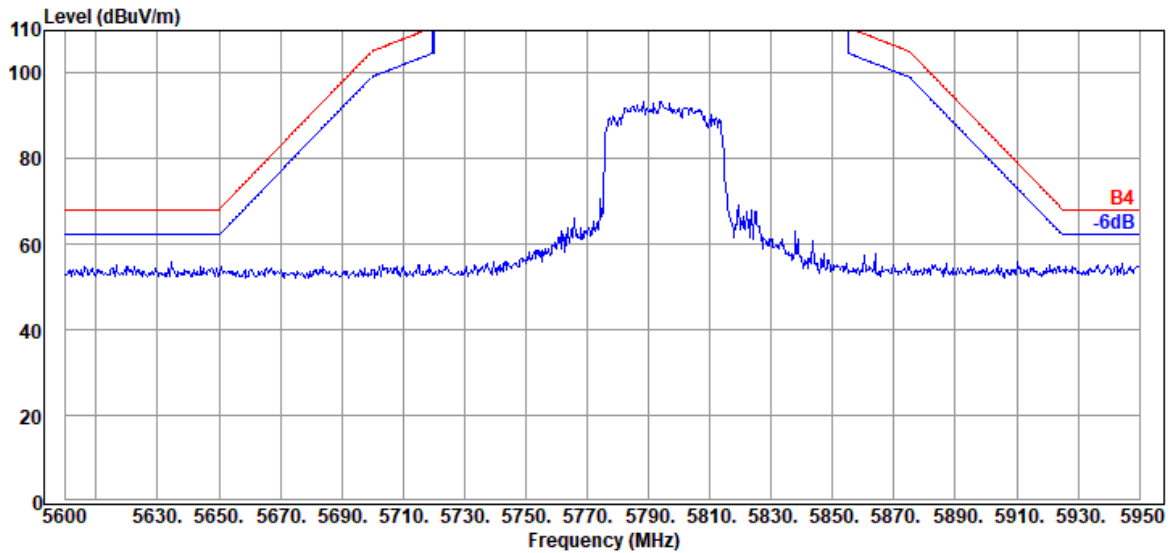

Antenna at Vertical Polarization

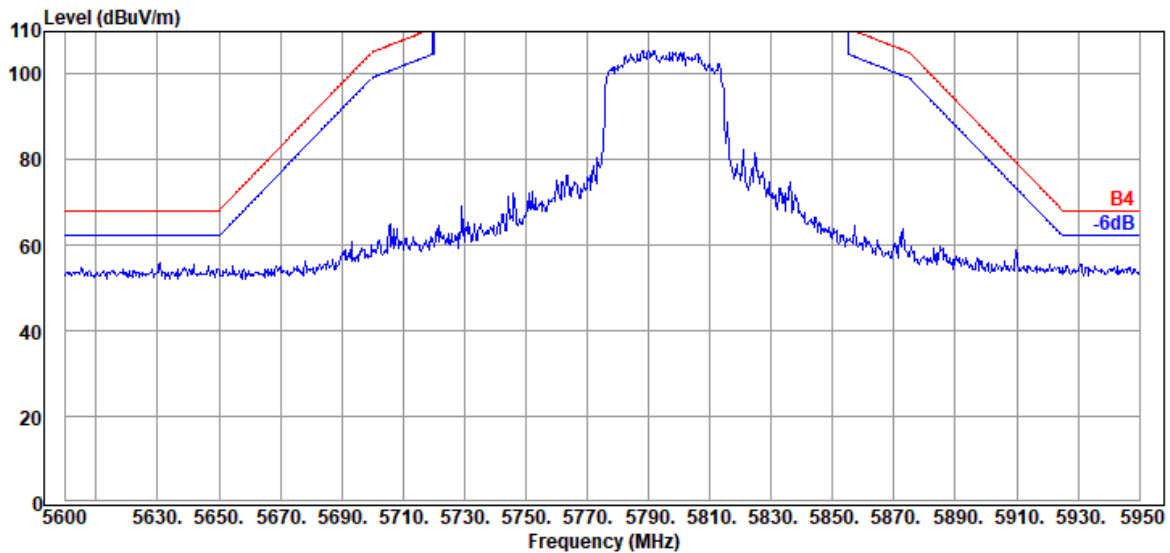


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

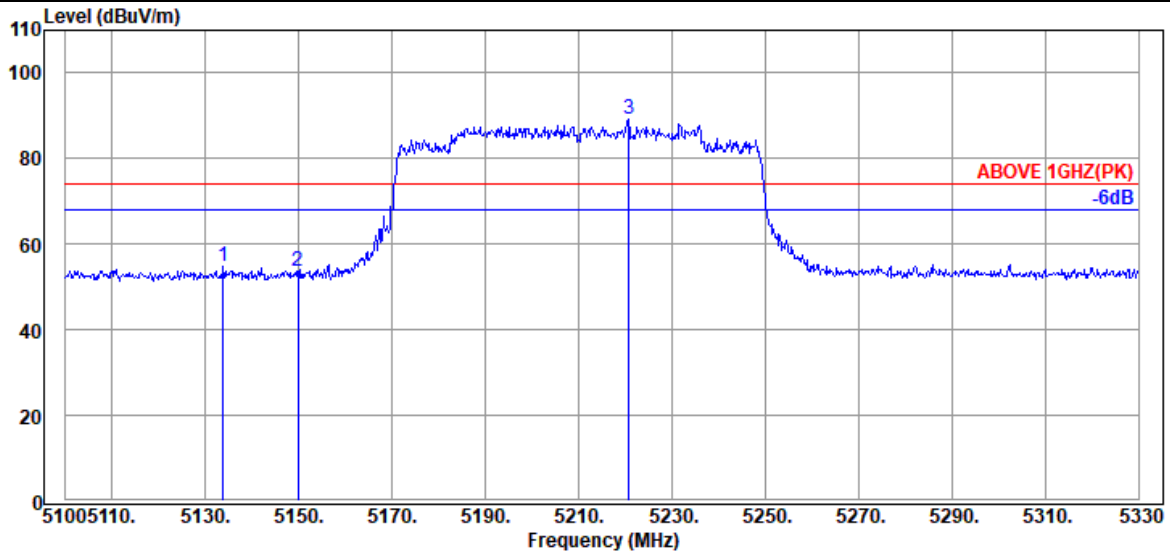

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.810	33.70	8.88	39.29	51.51	54.80	74.00	19.20	Peak
5149.910	33.70	8.88	39.29	50.46	53.75	74.00	20.25	Peak
@ 5220.750	33.75	8.93	39.28	85.73	89.13	---	---	Peak

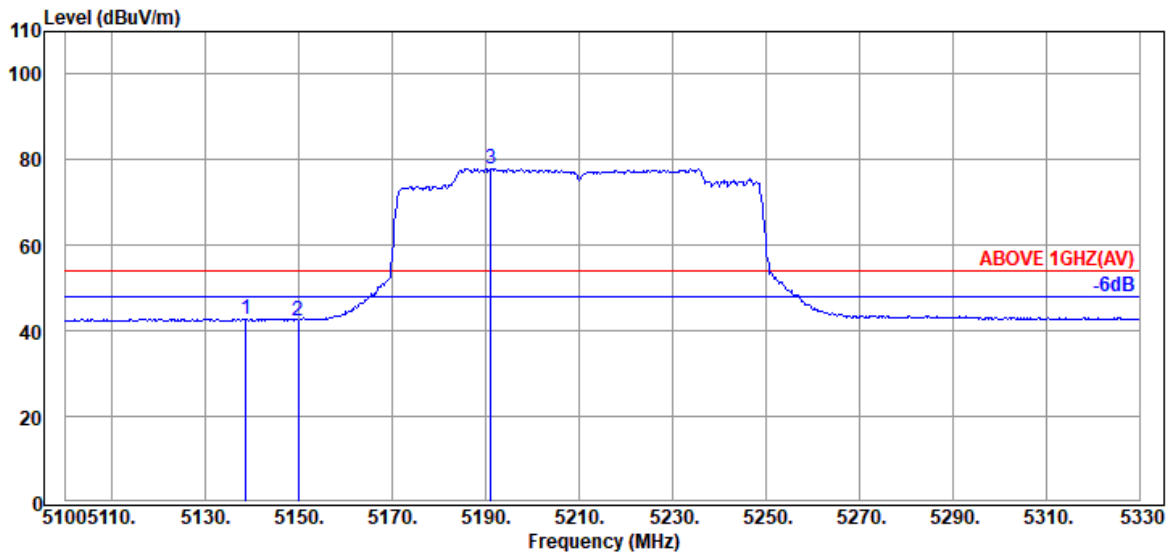


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.640	33.70	8.88	39.29	39.57	42.86	54.00	11.14	Average
5149.910	33.70	8.88	39.29	39.22	42.51	54.00	11.49	Average
@ 5191.080	33.70	8.91	39.28	74.72	78.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

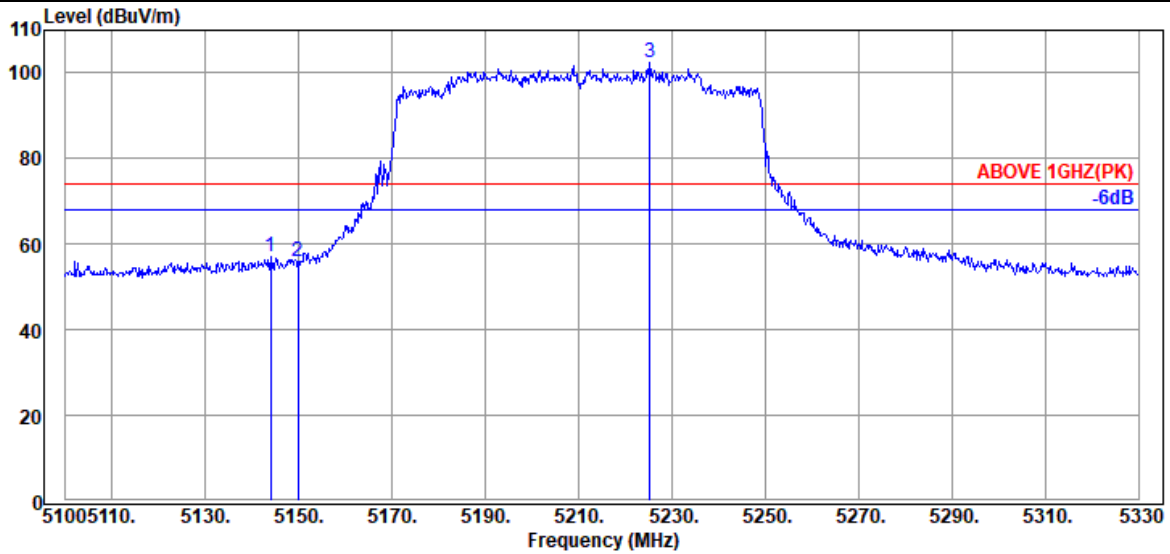

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.930	33.70	8.88	39.29	53.70	56.99	74.00	17.01	Peak
5149.910	33.70	8.88	39.29	52.65	55.94	74.00	18.06	Peak
@ 5225.350	33.75	8.93	39.28	99.04	102.44	---	---	Peak

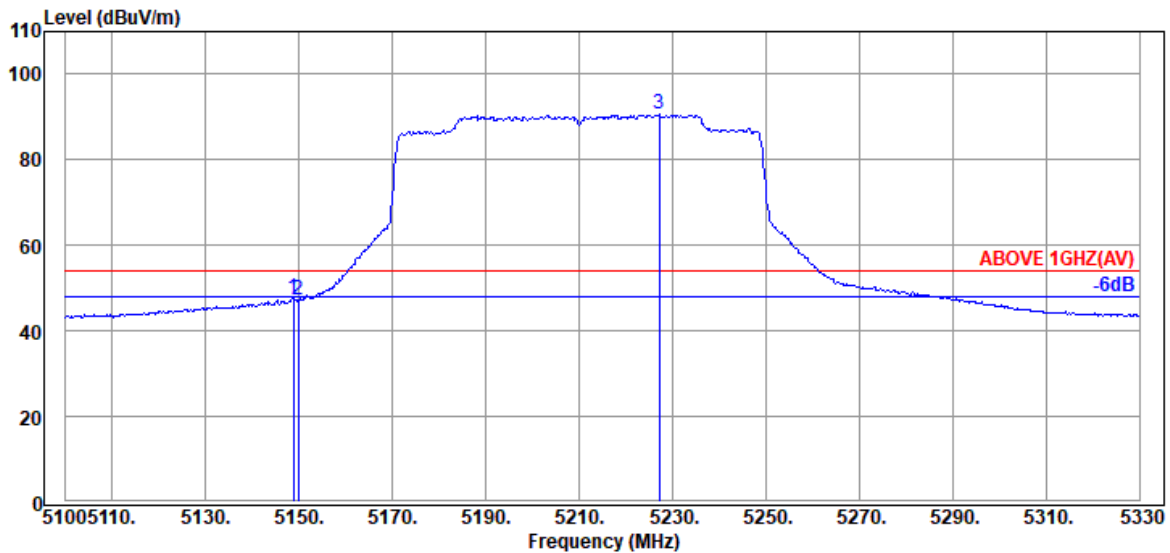


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.760	33.70	8.88	39.29	44.22	47.51	54.00	6.49	Average
5149.910	33.70	8.88	39.29	44.13	47.42	54.00	6.58	Average
@ 5227.190	33.75	8.93	39.28	87.14	90.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

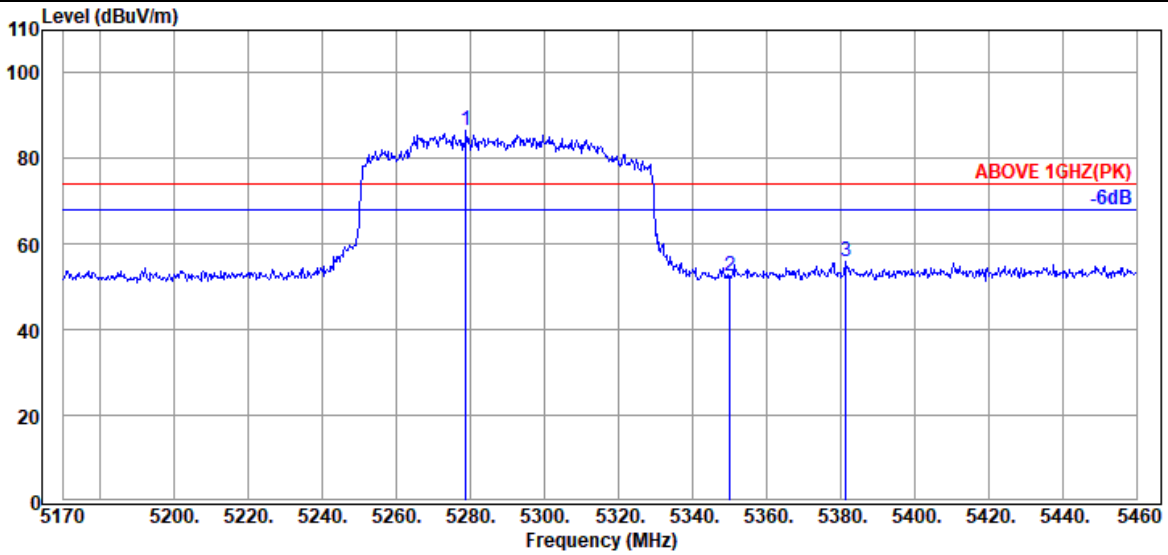

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.750	34.00	8.96	39.28	82.73	86.41	---	---	Peak
5350.090	33.90	8.99	39.27	48.94	52.56	74.00	21.44	Peak
5381.410	34.03	9.01	39.27	52.32	56.09	74.00	17.91	Peak

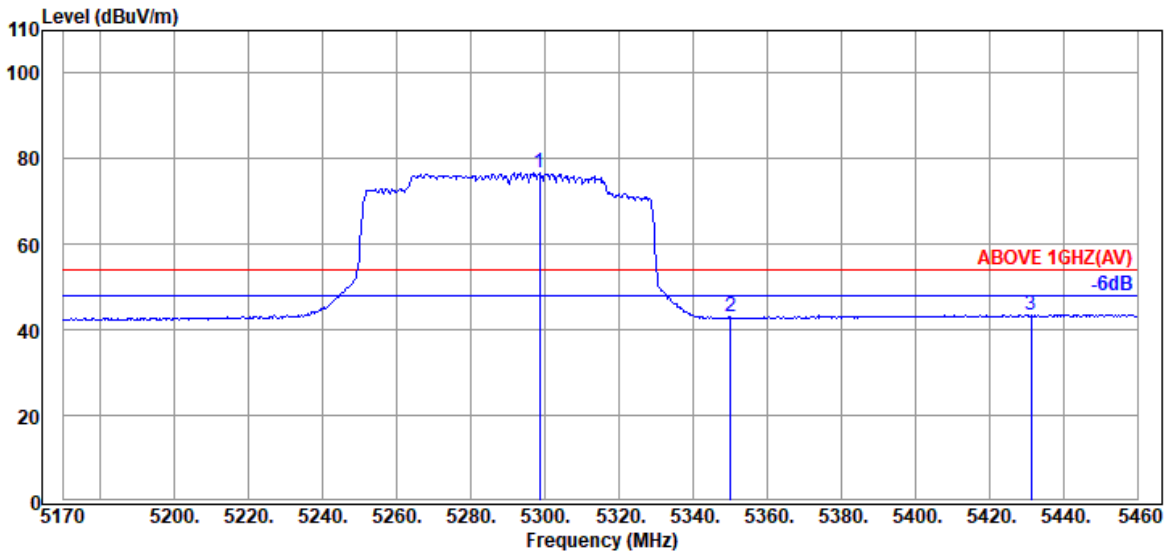


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.470	34.10	8.97	39.28	72.87	76.66	---	---	Average
5350.090	33.90	8.99	39.27	39.30	42.92	54.00	11.08	Average
5431.290	34.15	9.04	39.27	39.65	43.57	54.00	10.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

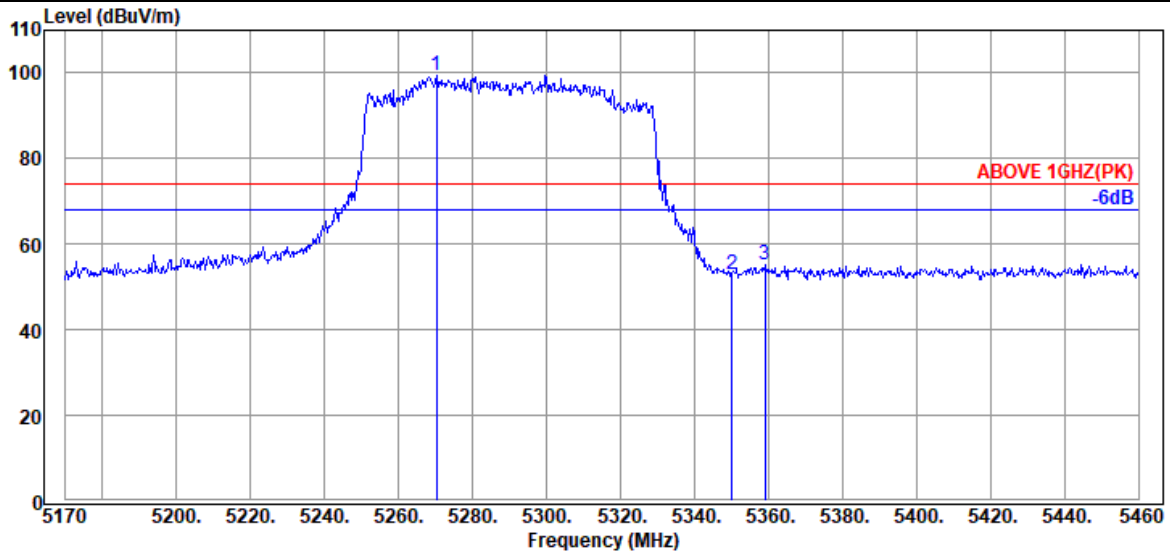

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.340	33.90	8.95	39.28	95.84	99.41	---	---	Peak
5350.090	33.90	8.99	39.27	49.48	53.10	74.00	20.90	Peak
5359.080	33.97	9.00	39.27	51.67	55.37	74.00	18.63	Peak

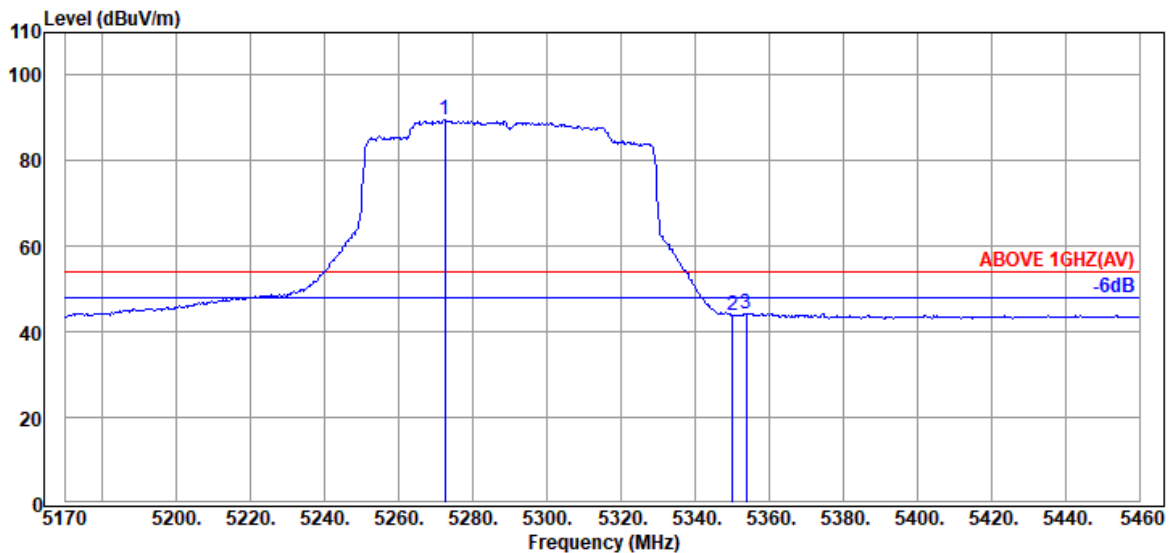


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.370	33.90	8.95	39.28	86.00	89.57	---	---	Average
5350.090	33.90	8.99	39.27	40.28	43.90	54.00	10.10	Average
5353.860	33.90	8.99	39.27	40.76	44.38	54.00	9.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

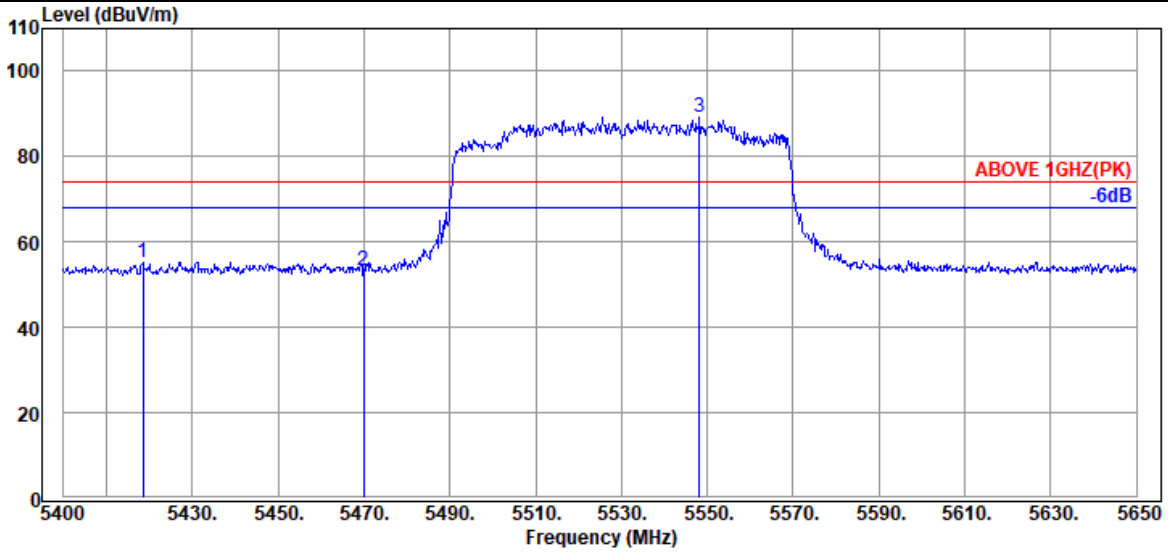

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.500	34.15	9.04	39.27	51.42	55.34	74.00	18.66	Peak
5470.000	34.17	9.06	39.26	49.23	53.20	74.00	20.80	Peak
@ 5548.250	34.10	9.10	39.27	85.33	89.26	---	---	Peak

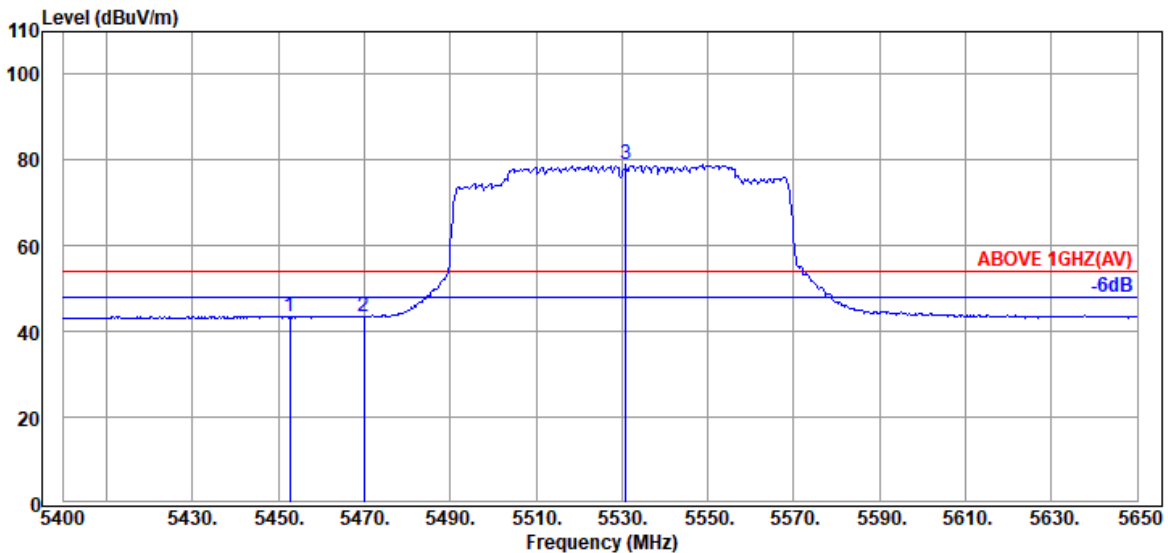


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.750	34.20	9.05	39.26	39.67	43.66	54.00	10.34	Average
5470.000	34.17	9.06	39.26	39.46	43.43	54.00	10.57	Average
@ 5531.000	34.10	9.09	39.27	75.00	78.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

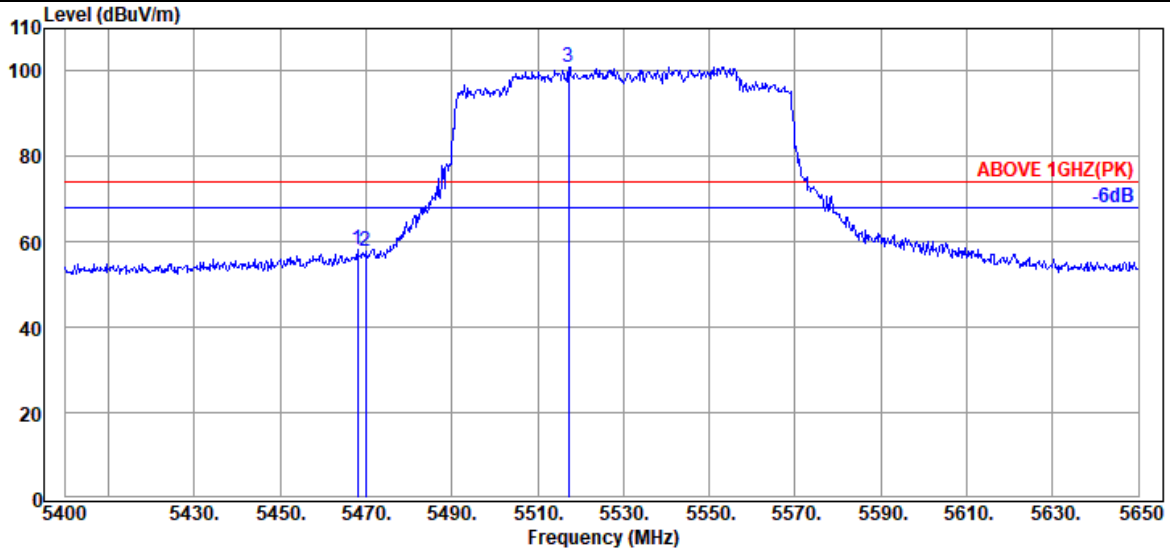

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.17	9.06	39.26	54.33	58.30	74.00	15.70	Peak
5470.000	34.17	9.06	39.26	53.98	57.95	74.00	16.05	Peak
@ 5517.250	34.10	9.09	39.26	97.11	101.04	---	---	Peak

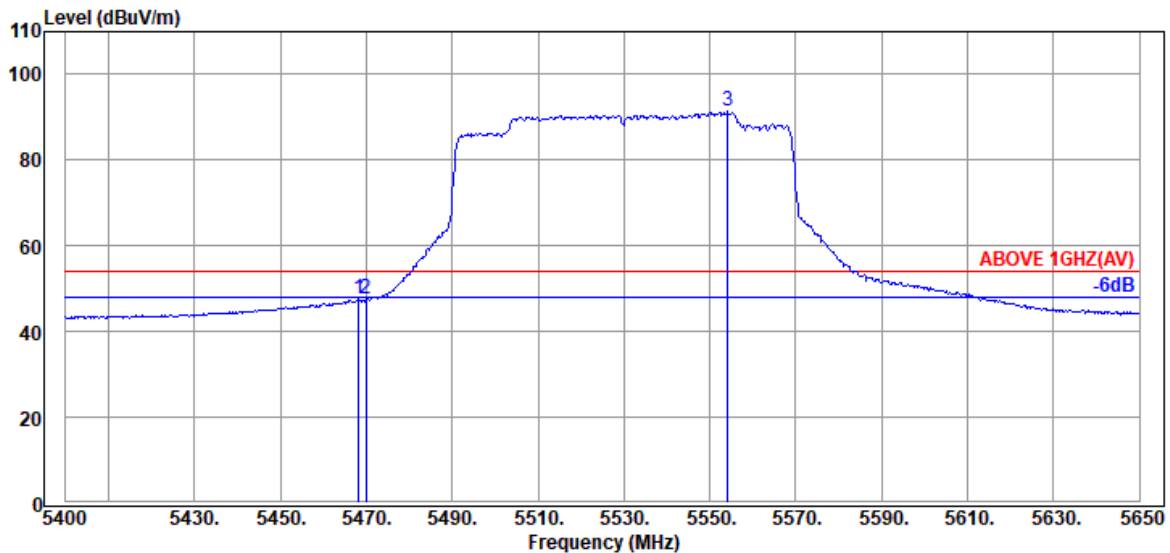


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.250	34.17	9.06	39.26	43.63	47.60	54.00	6.40	Average
5470.000	34.17	9.06	39.26	43.47	47.44	54.00	6.56	Average
@ 5554.250	34.10	9.10	39.27	87.47	91.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

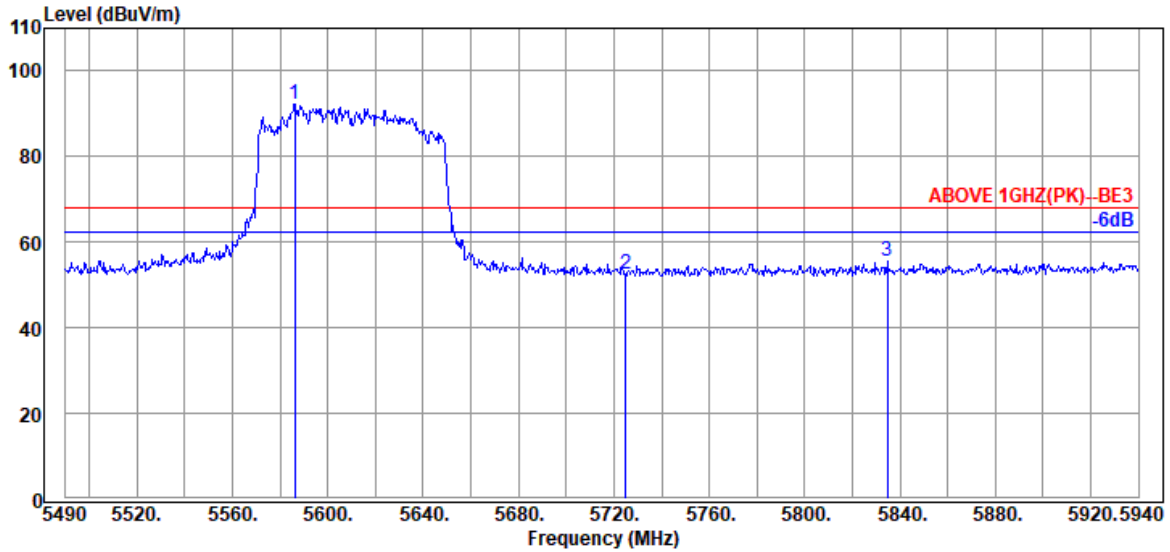

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5586.300	34.03	9.12	39.28	88.33	92.20	---	---	Peak
5724.900	33.80	9.20	39.30	48.88	52.58	68.20	15.62	Peak
5834.700	34.07	9.25	39.33	51.75	55.74	68.20	12.46	Peak

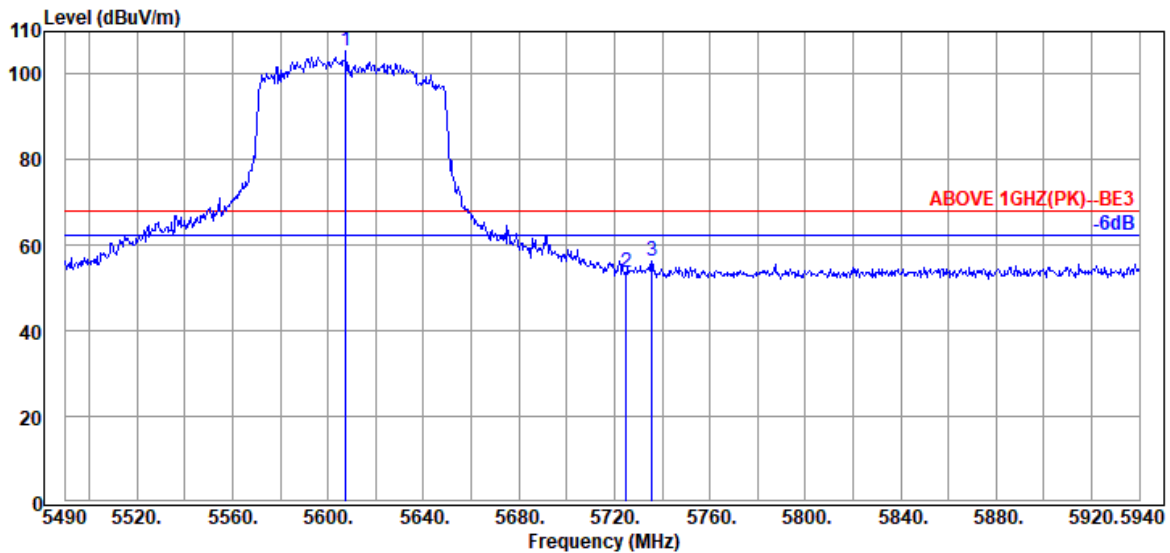


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.450	34.00	9.13	39.28	101.74	105.59	---	---	Peak
5724.900	33.80	9.20	39.30	50.12	53.82	68.20	14.38	Peak
5735.700	33.80	9.20	39.31	52.81	56.50	68.20	11.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.


● Test SKU #1 (with INPAQ Antenna)

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

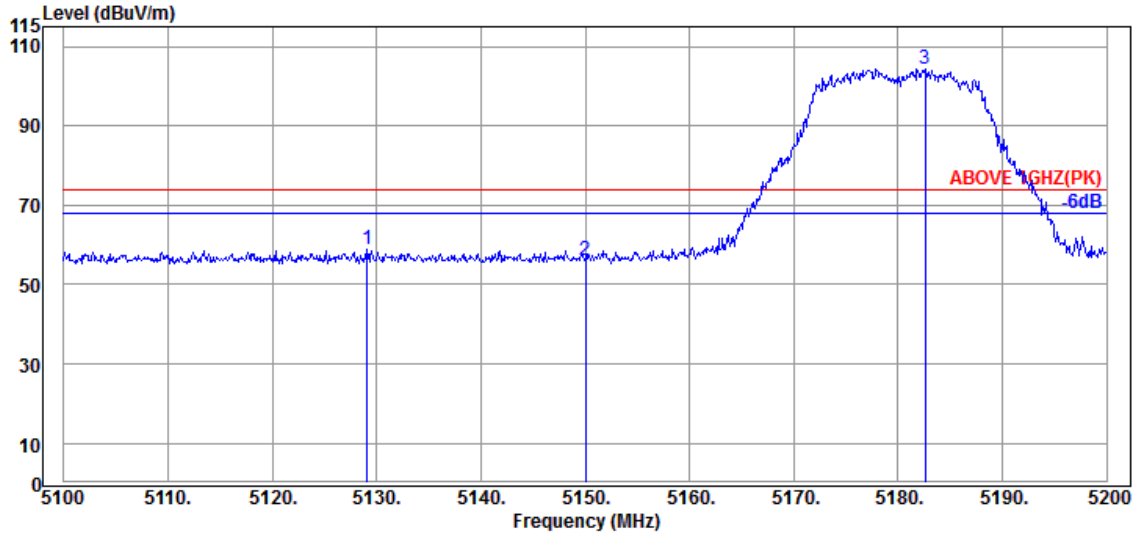

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.100	34.40	8.88	34.34	49.80	58.74	74.00	15.26	Peak
5150.000	34.50	8.88	34.34	47.07	56.11	74.00	17.89	Peak
@ 5182.600	34.63	8.90	34.32	95.15	104.36	---	---	Peak

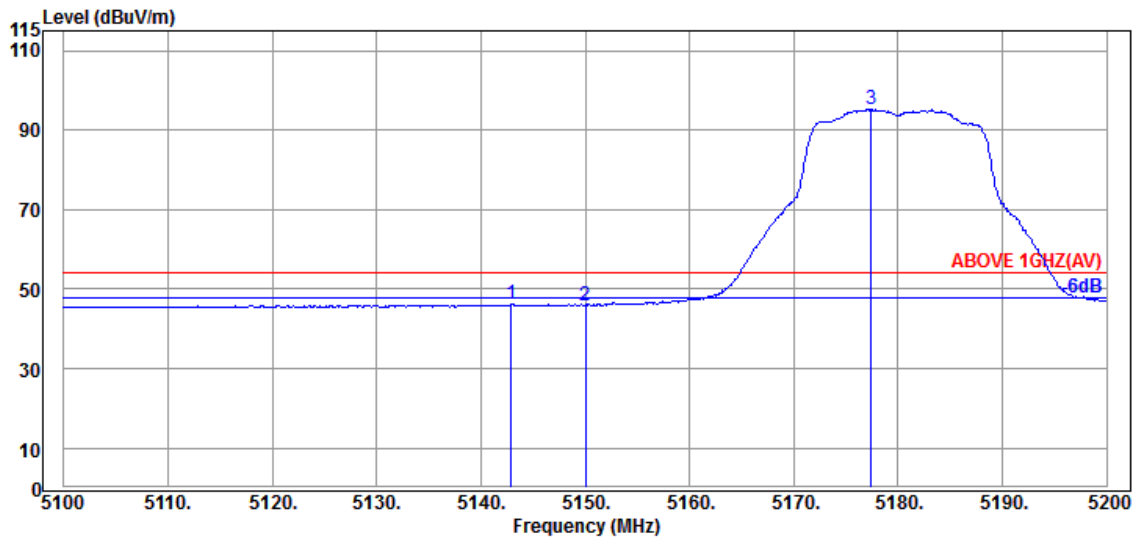


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.900	34.50	8.88	34.34	37.08	46.12	54.00	7.88	Average
5150.000	34.50	8.88	34.34	36.97	46.01	54.00	7.99	Average
@ 5177.400	34.63	8.90	34.32	85.94	95.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

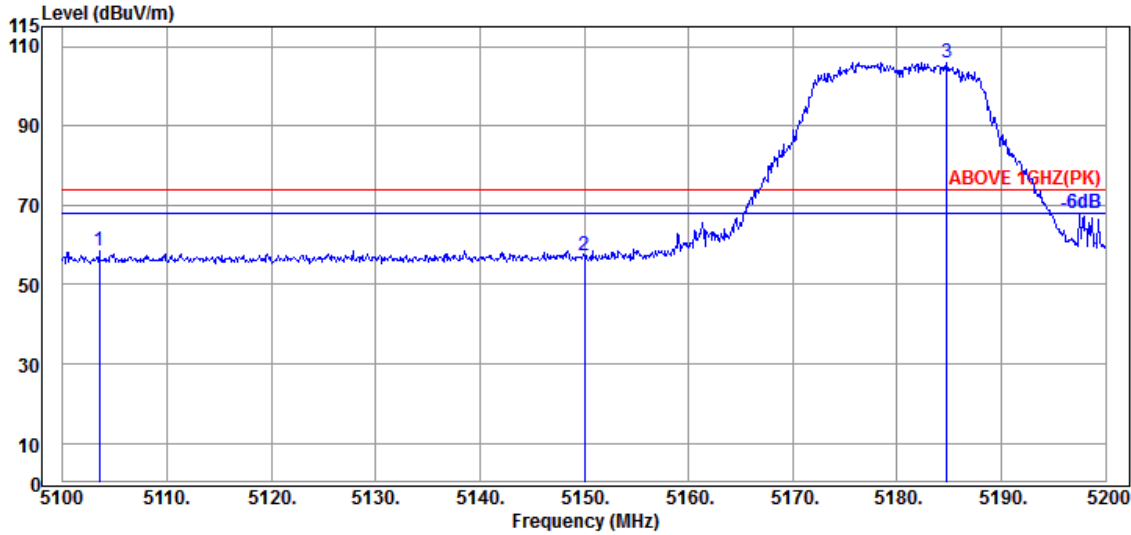

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.500	34.20	8.86	34.36	49.81	58.51	74.00	15.49	Peak
5150.000	34.50	8.88	34.34	48.21	57.25	74.00	16.75	Peak
@ 5184.800	34.63	8.90	34.32	96.82	106.03	---	---	Peak

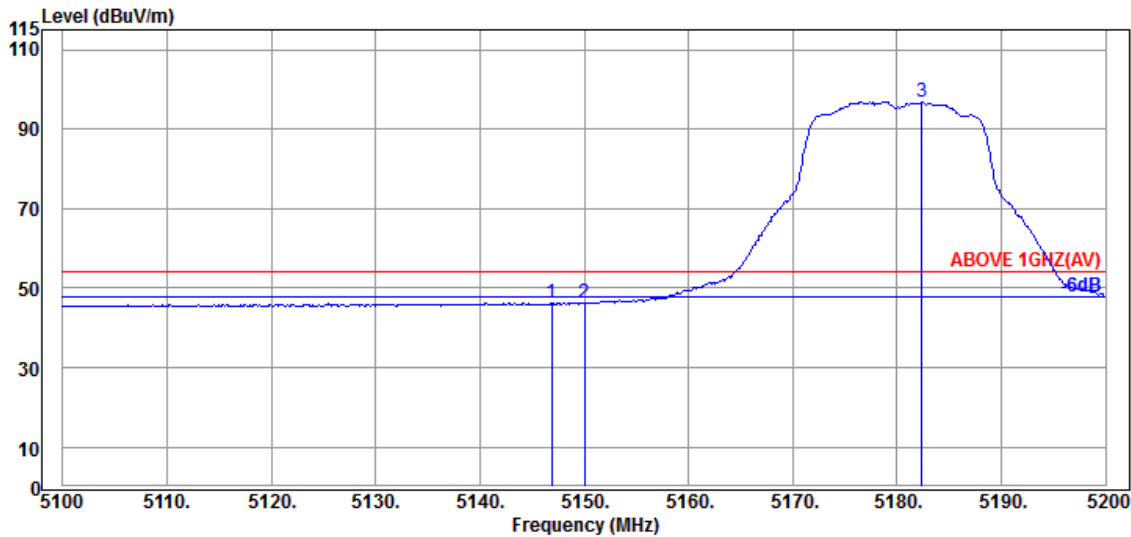


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.900	34.50	8.88	34.34	37.28	46.32	54.00	7.68	Average
5150.000	34.50	8.88	34.34	37.28	46.32	54.00	7.68	Average
@ 5182.400	34.63	8.90	34.32	87.67	96.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

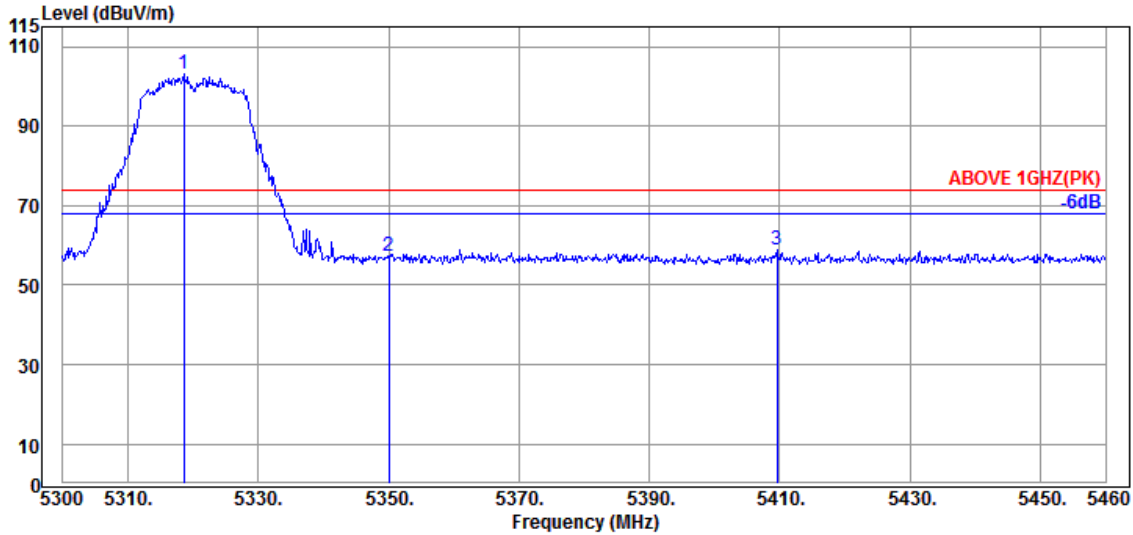

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.560	34.57	8.98	34.27	93.72	103.00	---	---	Peak
5350.080	34.90	8.99	34.26	47.86	57.49	74.00	16.51	Peak
5409.600	34.75	9.03	34.23	49.27	58.82	74.00	15.18	Peak

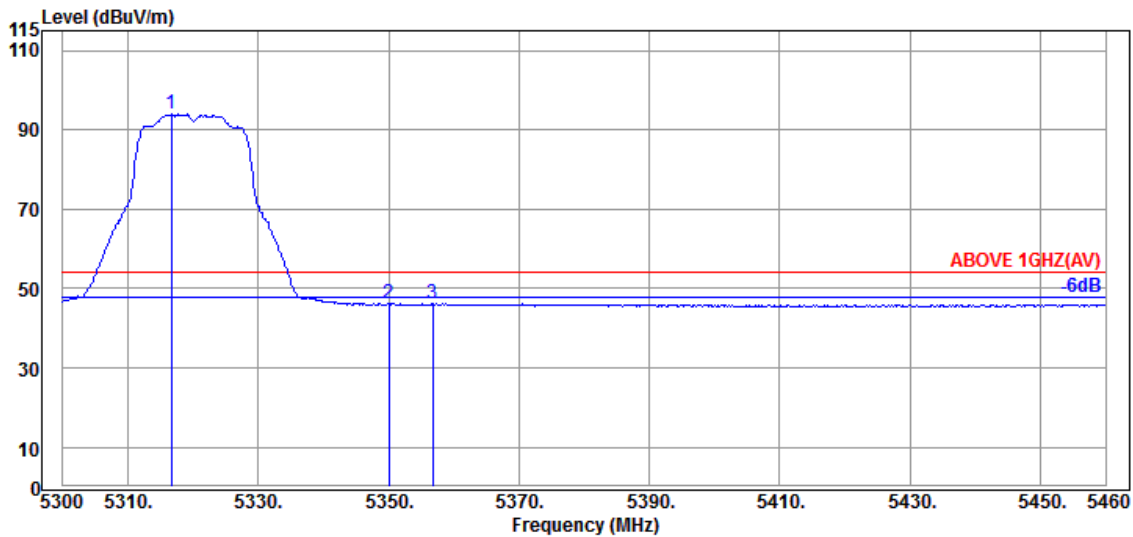


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.640	34.57	8.98	34.27	84.65	93.93	---	---	Average
5350.080	34.90	8.99	34.26	36.56	46.19	54.00	7.81	Average
5356.800	34.87	9.00	34.26	36.59	46.20	54.00	7.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

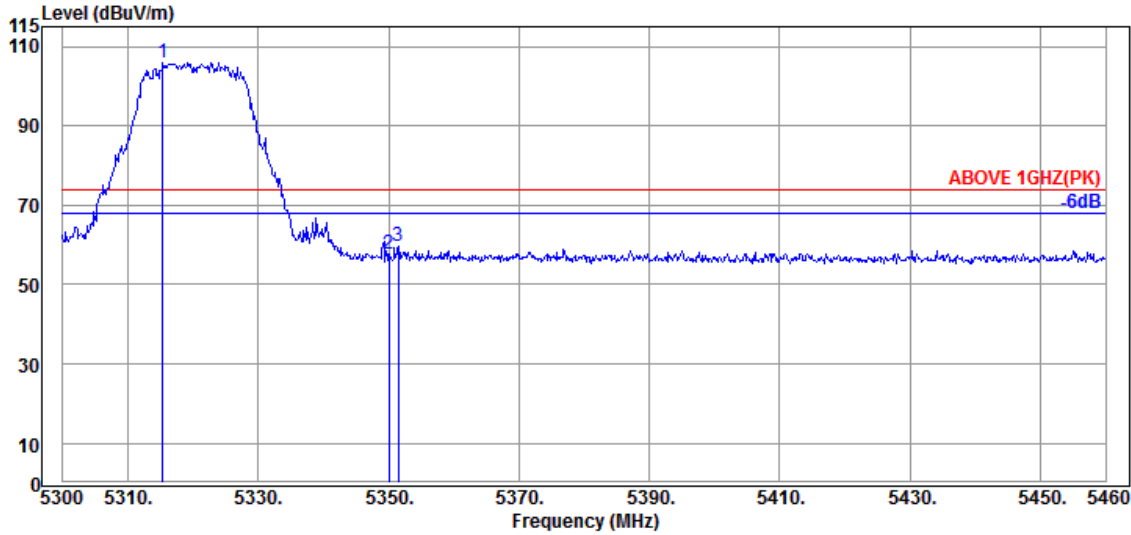

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.360	34.57	8.98	34.27	96.68	105.96	---	---	Peak
5350.080	34.90	8.99	34.26	47.90	57.53	74.00	16.47	Peak
5351.520	34.90	8.99	34.26	49.85	59.48	74.00	14.52	Peak

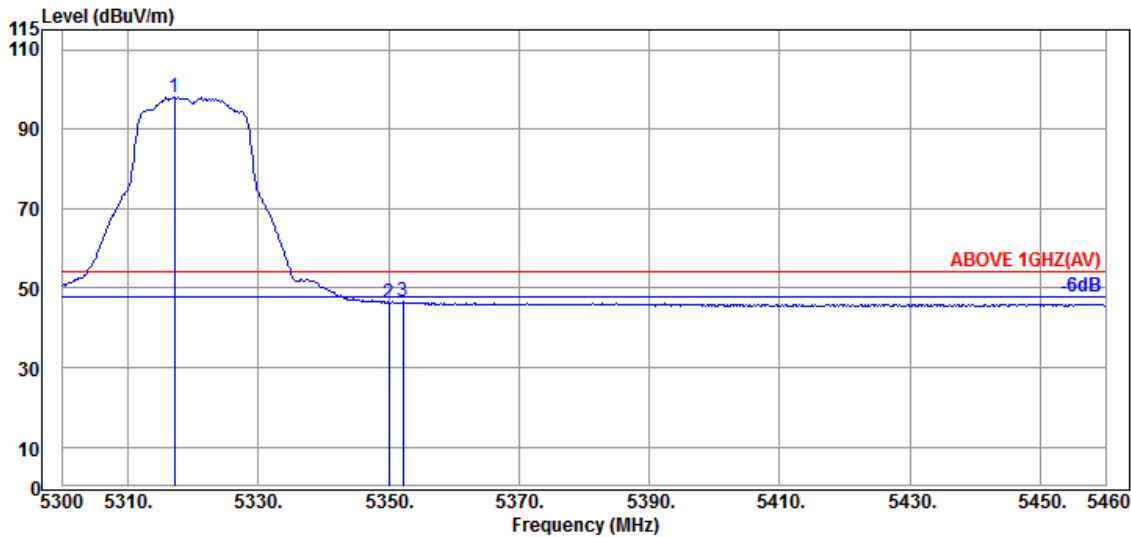


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.57	8.98	34.27	88.77	98.05	---	---	Average
5350.080	34.90	8.99	34.26	36.66	46.29	54.00	7.71	Average
5352.160	34.90	8.99	34.26	36.92	46.55	54.00	7.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

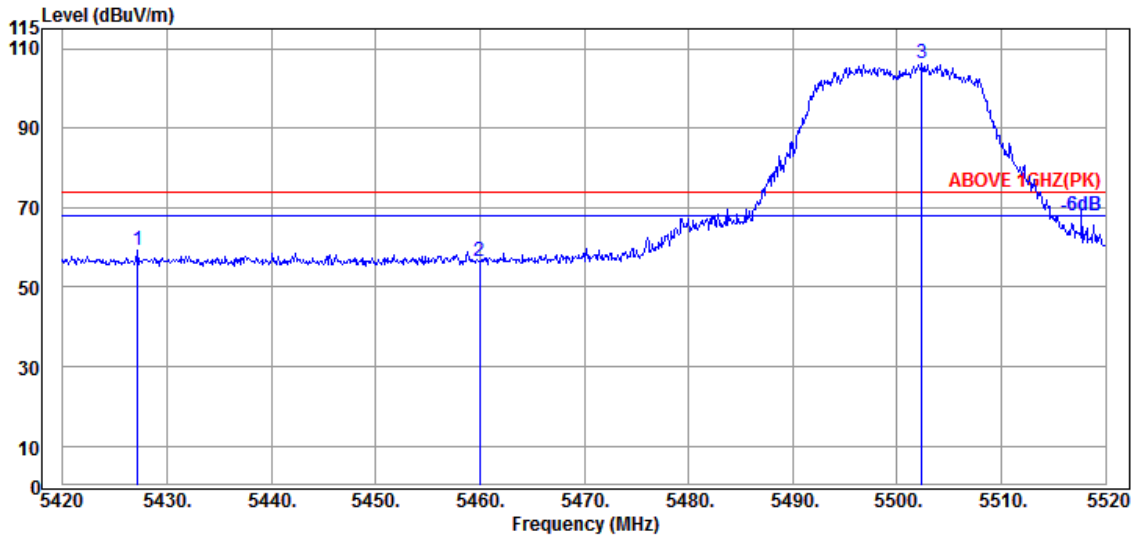

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.200	34.70	9.04	34.23	49.61	59.12	74.00	14.88	Peak
5460.000	34.60	9.05	34.21	47.08	56.52	74.00	17.48	Peak
@ 5502.400	34.70	9.08	34.20	96.62	106.20	---	---	Peak

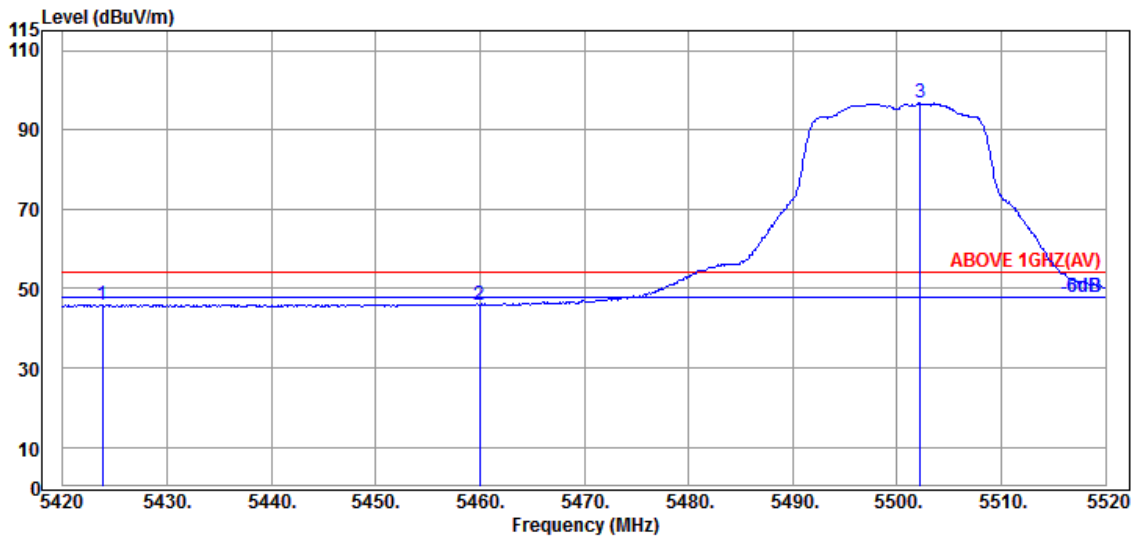


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.800	34.70	9.04	34.23	36.53	46.04	54.00	7.96	Average
5460.000	34.60	9.05	34.21	36.49	45.93	54.00	8.07	Average
@ 5502.200	34.70	9.08	34.20	87.09	96.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

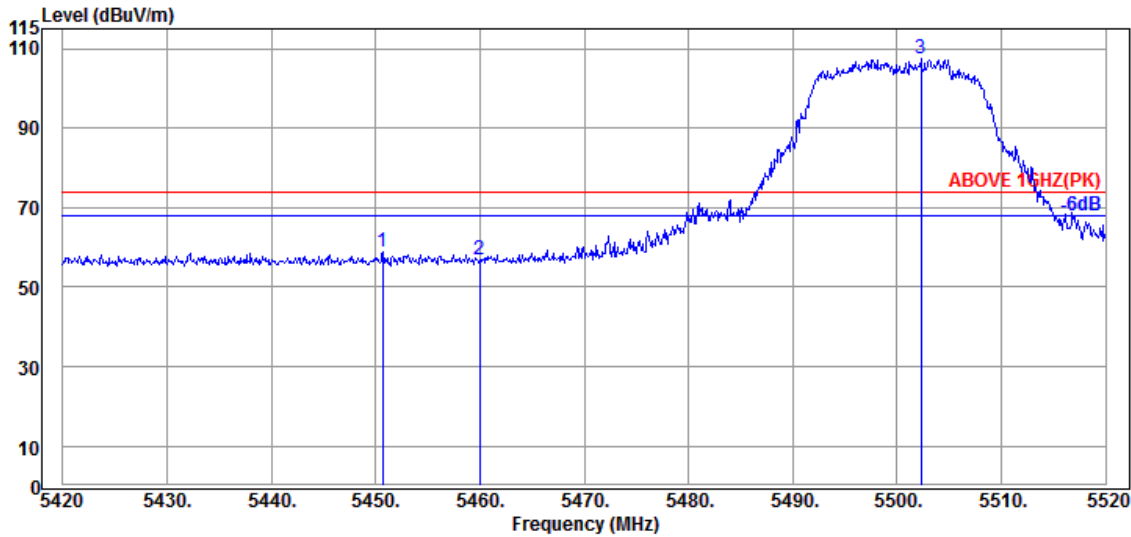

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.700	34.60	9.05	34.22	49.62	59.05	74.00	14.95	Peak
5460.000	34.60	9.05	34.21	47.38	56.82	74.00	17.18	Peak
@ 5502.300	34.70	9.08	34.20	97.99	107.57	---	---	Peak

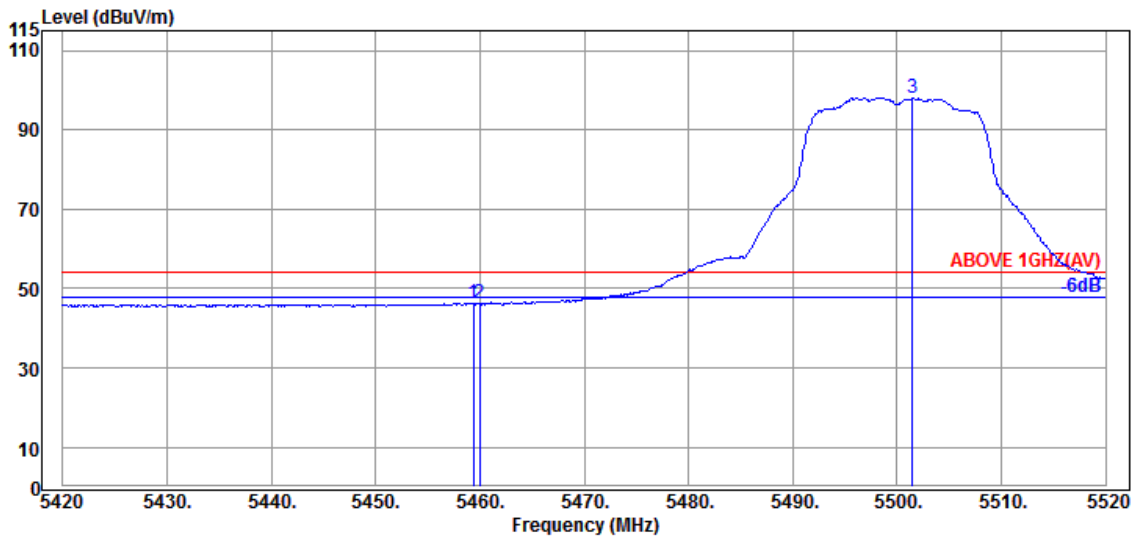


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	34.60	9.05	34.21	36.88	46.32	54.00	7.68	Average
5460.000	34.60	9.05	34.21	36.69	46.13	54.00	7.87	Average
@ 5501.500	34.70	9.08	34.20	88.47	98.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

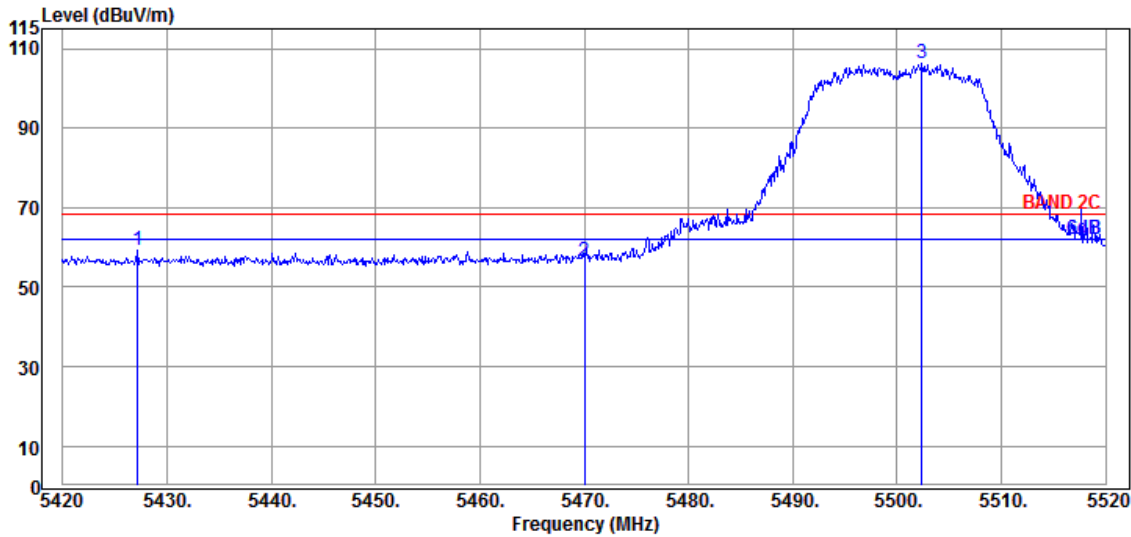

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.200	34.70	9.04	34.23	49.61	59.12	68.20	9.08	Peak
5470.000	34.63	9.06	34.21	46.95	56.43	68.20	11.77	Peak
@ 5502.400	34.70	9.08	34.20	96.62	106.20	---	---	Peak

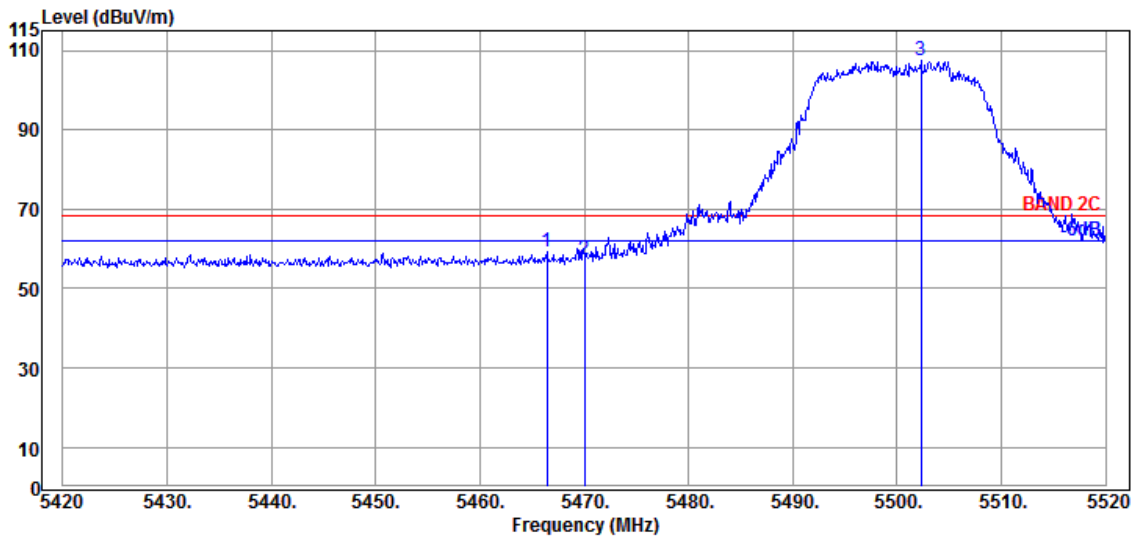


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.63	9.06	34.21	49.69	59.17	68.20	9.03	Peak
5470.000	34.63	9.06	34.21	47.67	57.15	68.20	11.05	Peak
@ 5502.300	34.70	9.08	34.20	97.99	107.57	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

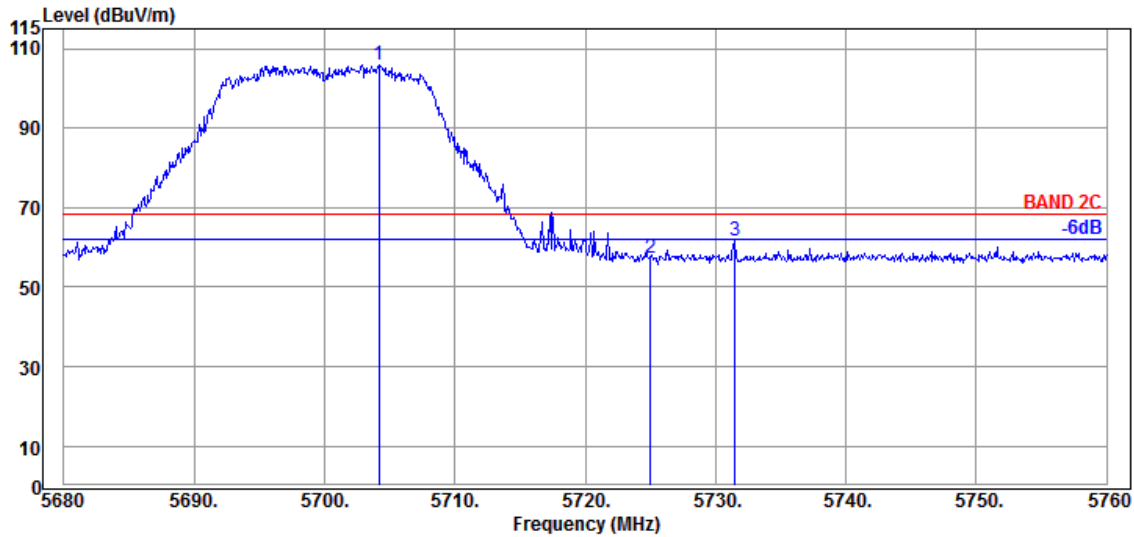

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.160	34.70	9.18	34.29	96.48	106.07	---	---	Peak
5725.040	34.90	9.20	34.30	47.69	57.49	68.20	10.71	Peak
5731.520	34.90	9.20	34.31	51.96	61.75	68.20	6.45	Peak

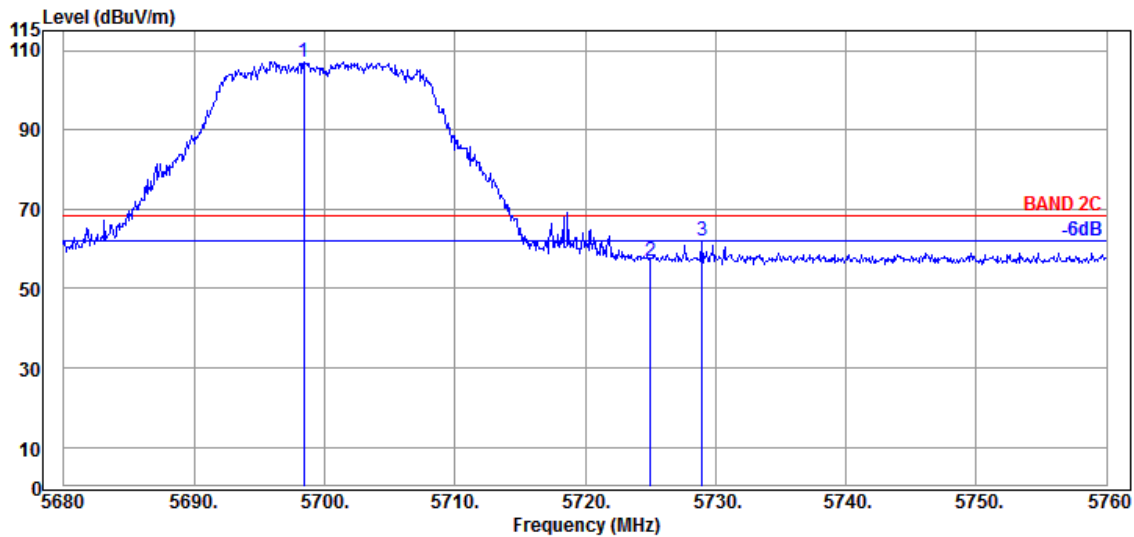


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.400	34.70	9.18	34.29	97.65	107.24	---	---	Peak
5725.040	34.90	9.20	34.30	47.25	57.05	68.20	11.15	Peak
5728.960	34.90	9.20	34.31	52.13	61.92	68.20	6.28	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

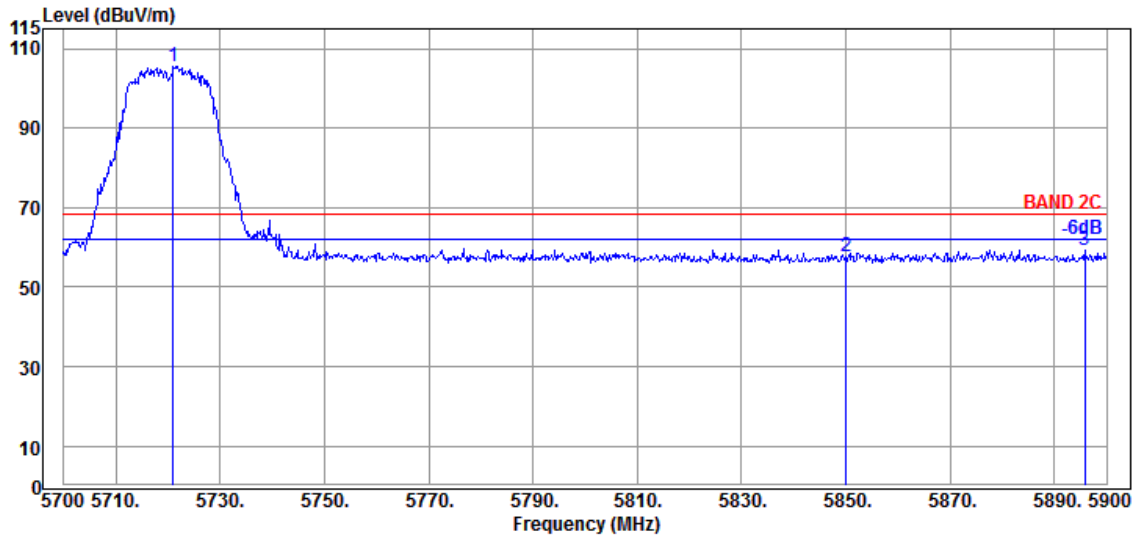

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.000	34.80	9.19	34.30	95.90	105.59	---	---	Peak
5850.000	35.40	9.25	34.36	47.29	57.58	68.20	10.62	Peak
5895.800	35.80	9.28	34.38	48.67	59.37	68.20	8.83	Peak

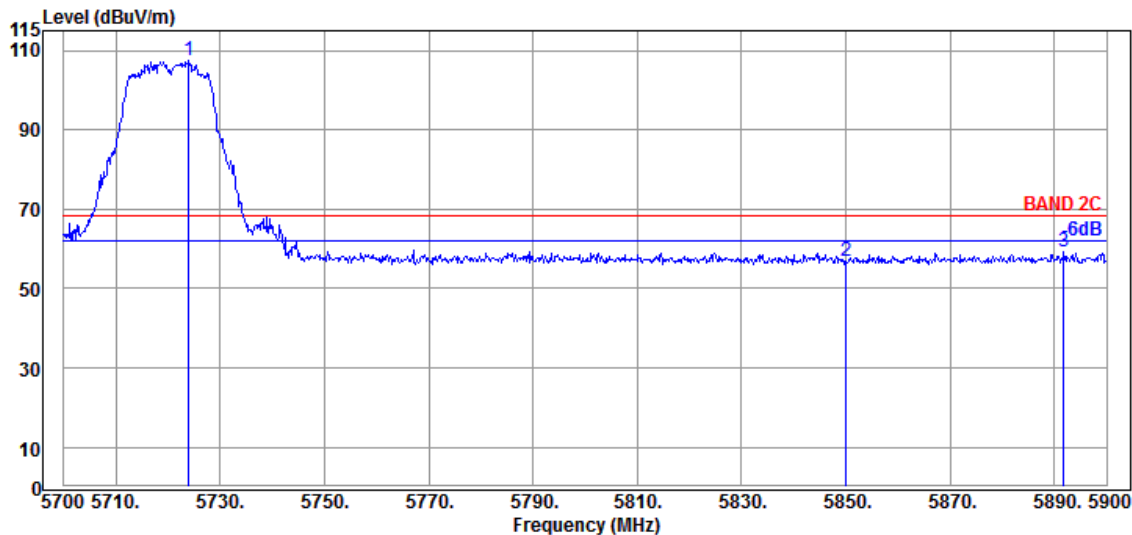


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.000	34.90	9.20	34.30	97.78	107.58	---	---	Peak
5850.000	35.40	9.25	34.36	46.48	56.77	68.20	11.43	Peak
5891.800	35.80	9.28	34.38	48.51	59.21	68.20	8.99	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

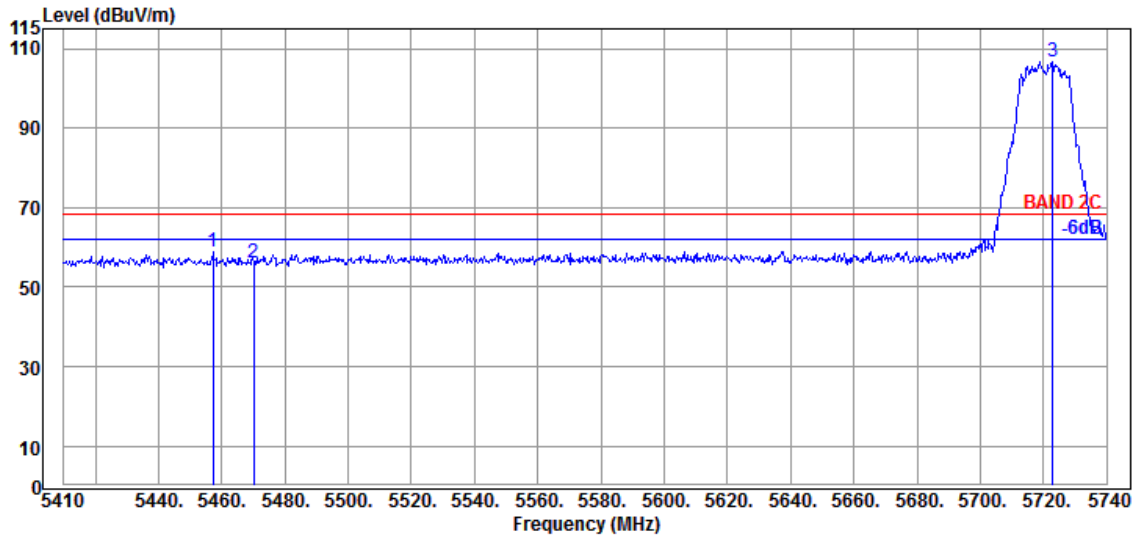

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.190	34.60	9.05	34.21	49.47	58.91	68.20	9.29	Peak
5470.060	34.63	9.06	34.21	46.70	56.18	68.20	12.02	Peak
@ 5722.840	34.90	9.20	34.30	96.87	106.67	---	---	Peak

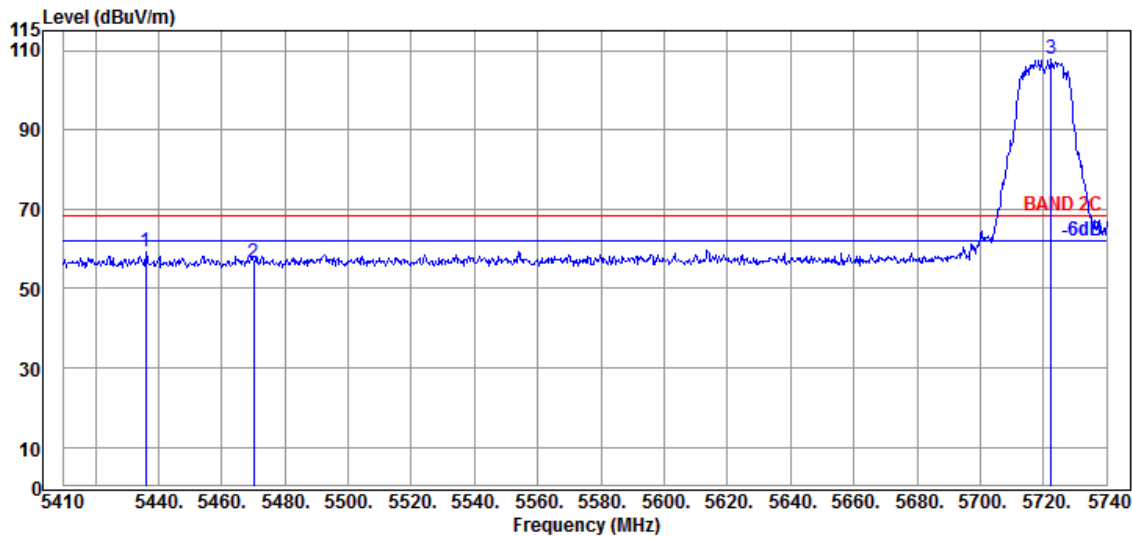


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.070	34.65	9.04	34.22	49.63	59.10	68.20	9.10	Peak
5470.060	34.63	9.06	34.21	46.86	56.34	68.20	11.86	Peak
@ 5722.510	34.90	9.20	34.30	98.12	107.92	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

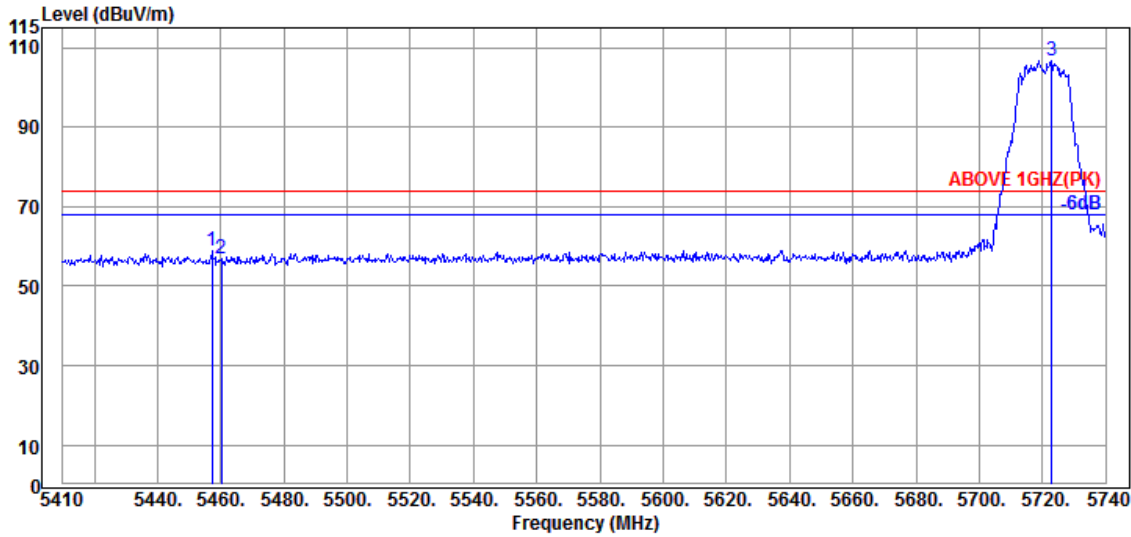

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.190	34.60	9.05	34.21	49.47	58.91	74.00	15.09	Peak
5460.160	34.60	9.05	34.21	47.54	56.98	74.00	17.02	Peak
@ 5722.840	34.90	9.20	34.30	96.87	106.67	---	---	Peak

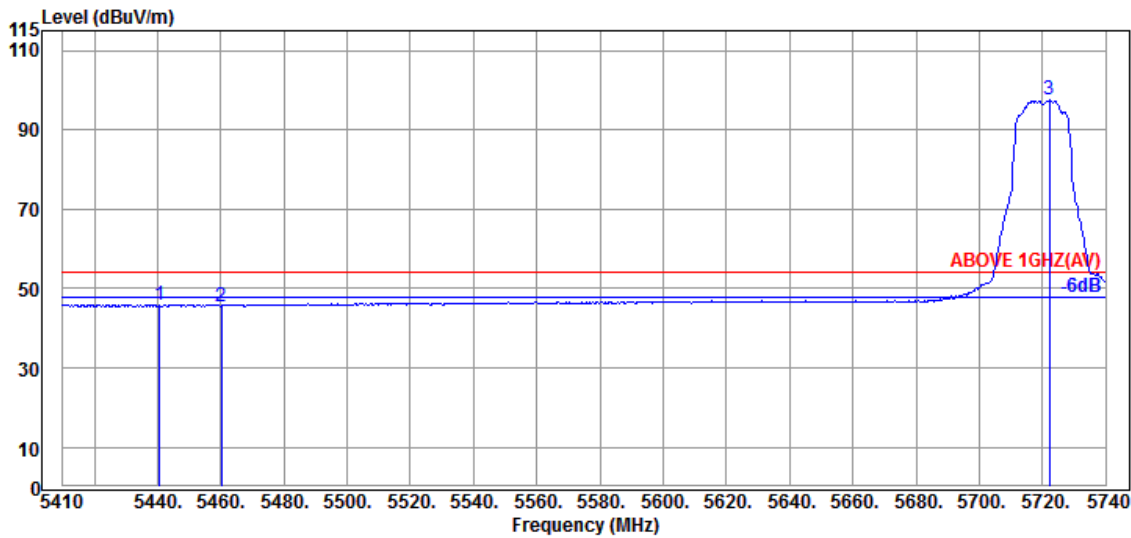


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.690	34.65	9.04	34.22	36.50	45.97	54.00	8.03	Average
5460.160	34.60	9.05	34.21	36.18	45.62	54.00	8.38	Average
@ 5722.180	34.90	9.20	34.30	87.65	97.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

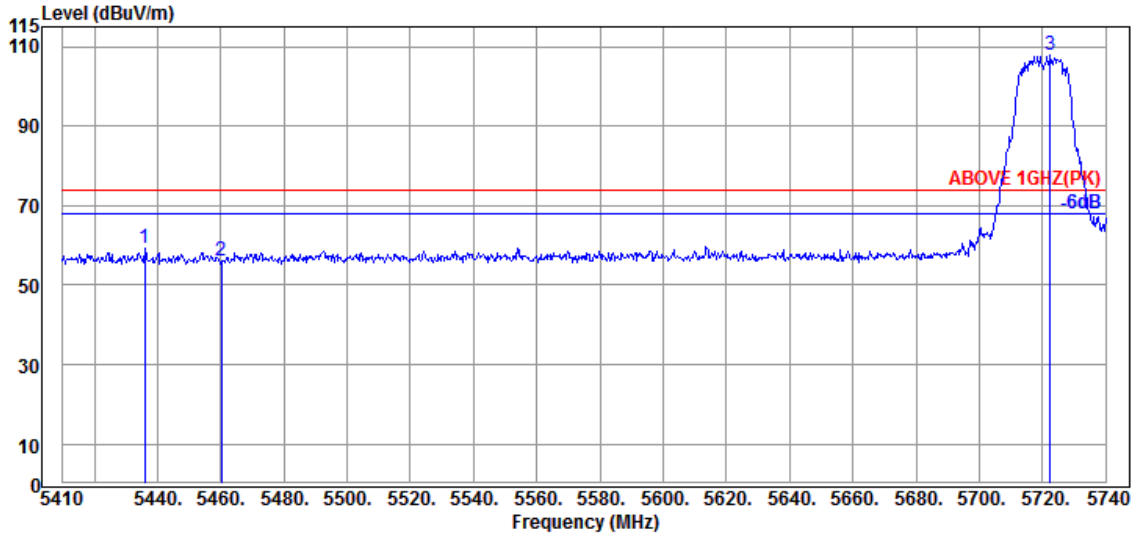

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.070	34.65	9.04	34.22	49.63	59.10	74.00	14.90	Peak
5460.160	34.60	9.05	34.21	46.52	55.96	74.00	18.04	Peak
@ 5722.510	34.90	9.20	34.30	98.12	107.92	---	---	Peak

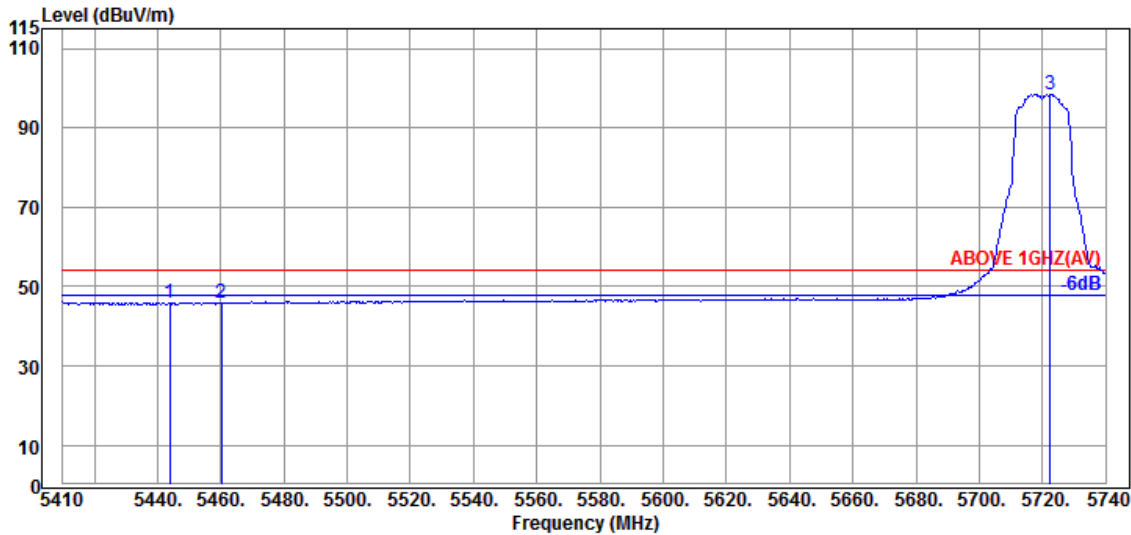


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.990	34.65	9.04	34.22	36.49	45.96	54.00	8.04	Average
5460.160	34.60	9.05	34.21	36.26	45.70	54.00	8.30	Average
@ 5722.510	34.90	9.20	34.30	88.68	98.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

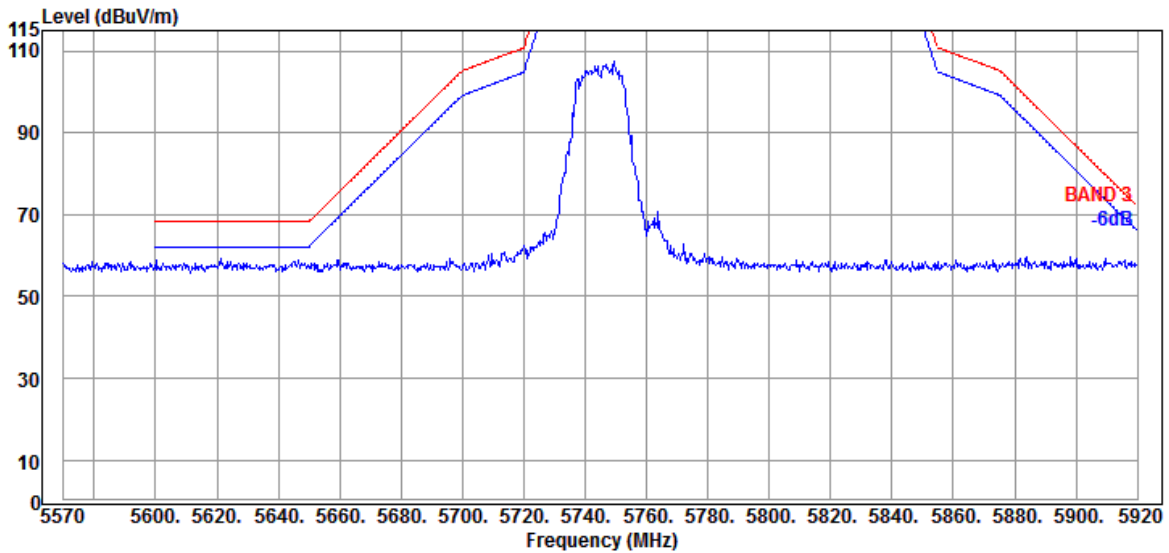


Antenna at Vertical Polarization

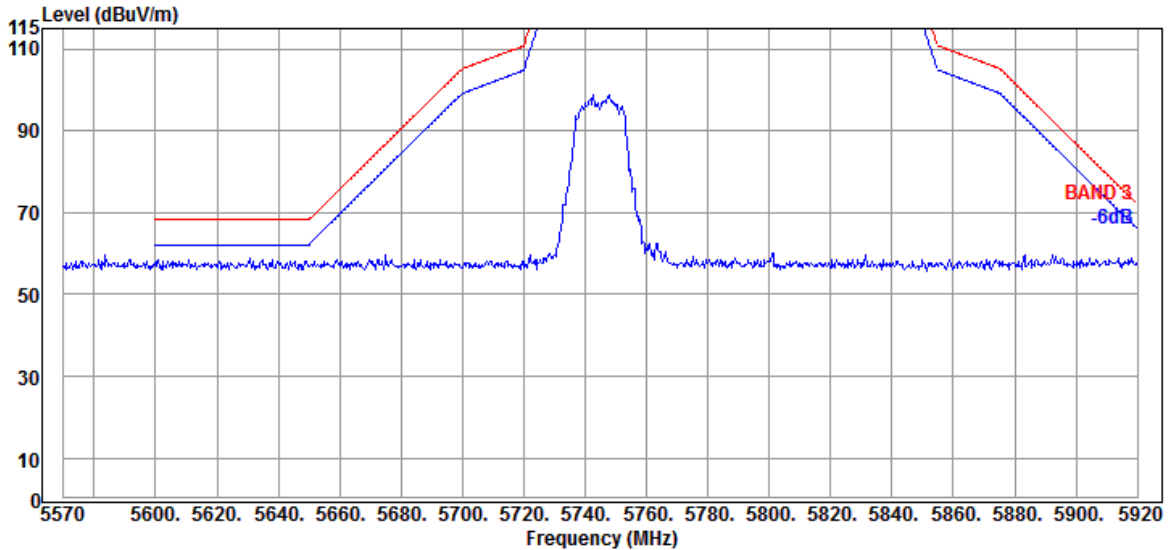


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

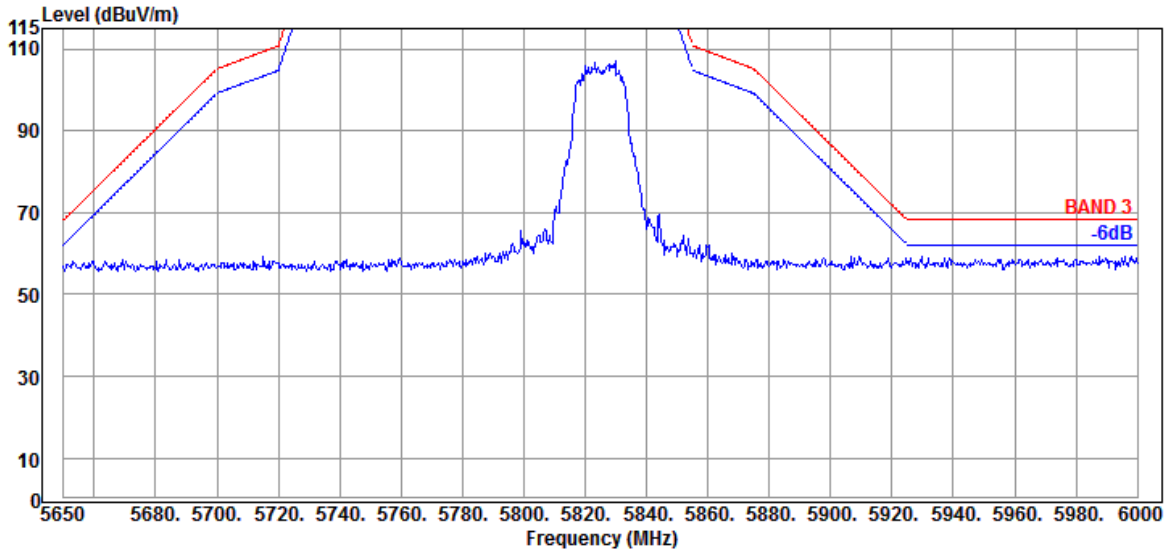

Antenna at Vertical Polarization

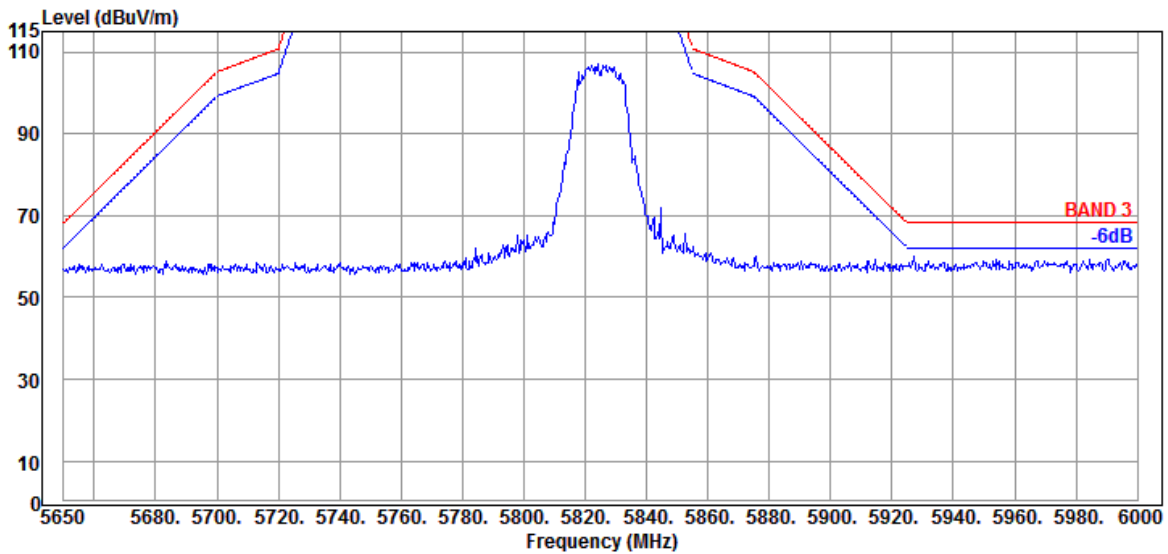


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

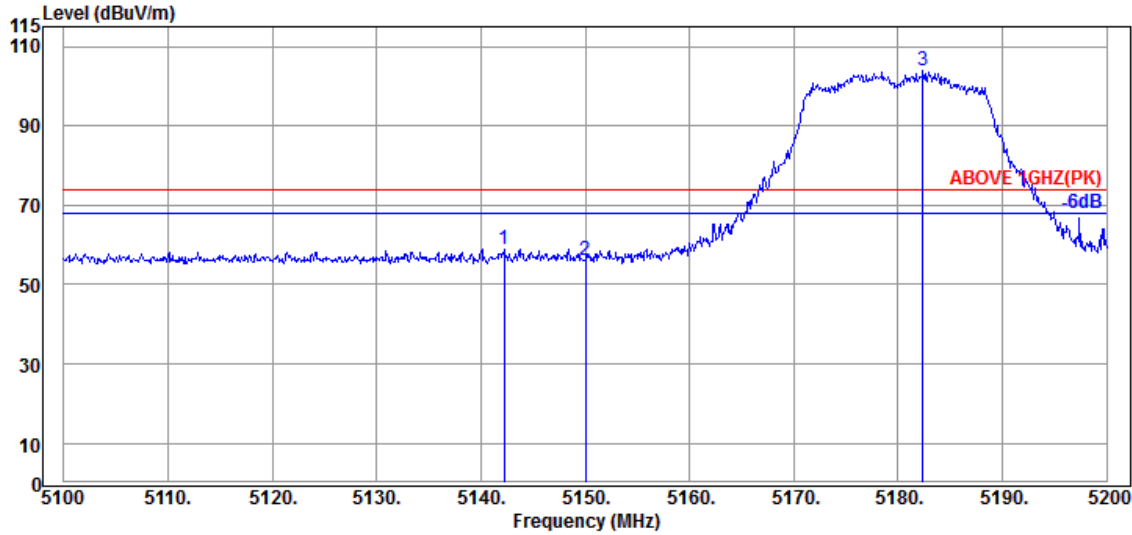

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.200	34.50	8.88	34.34	49.86	58.90	74.00	15.10	Peak
5150.000	34.50	8.88	34.34	47.03	56.07	74.00	17.93	Peak
@ 5182.400	34.63	8.90	34.32	94.63	103.84	---	---	Peak

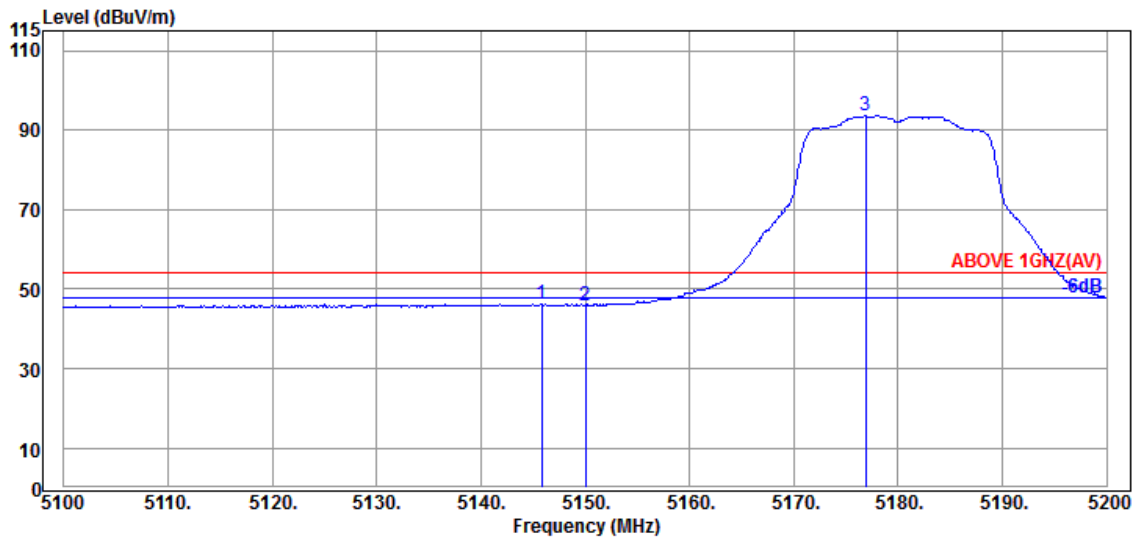


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.800	34.50	8.88	34.34	37.09	46.13	54.00	7.87	Average
5150.000	34.50	8.88	34.34	36.98	46.02	54.00	7.98	Average
@ 5176.900	34.63	8.90	34.32	84.55	93.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

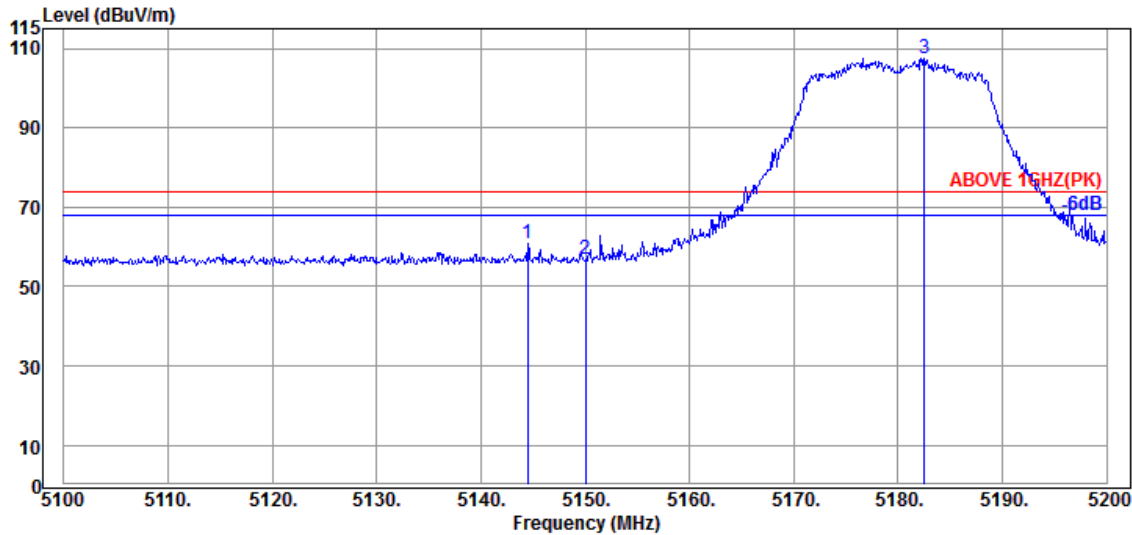

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.500	34.50	8.88	34.34	51.76	60.80	74.00	13.20	Peak
5150.000	34.50	8.88	34.34	47.92	56.96	74.00	17.04	Peak
@ 5182.500	34.63	8.90	34.32	98.40	107.61	---	---	Peak

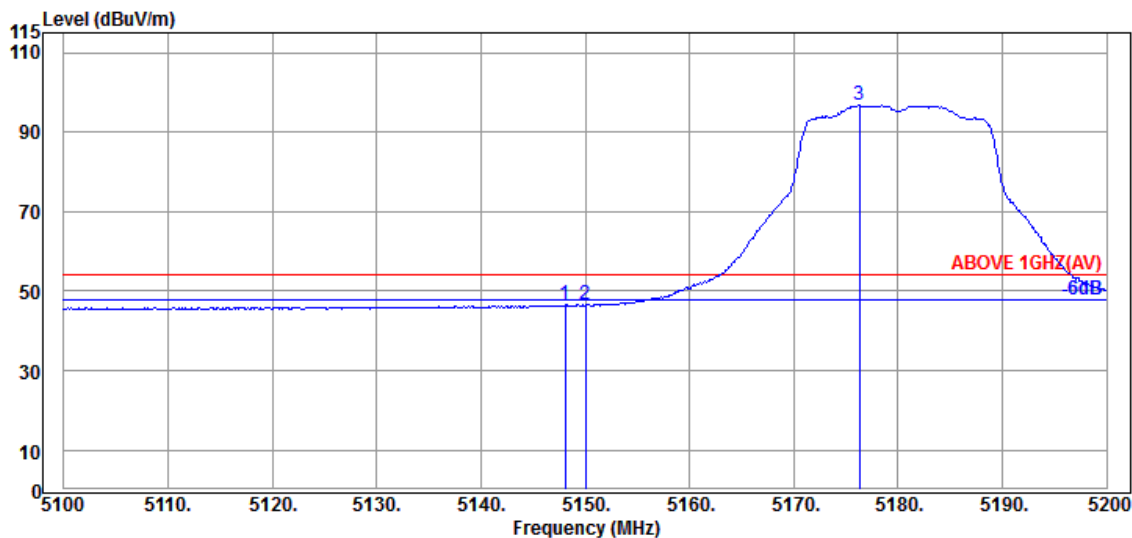


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.50	8.88	34.34	37.56	46.60	54.00	7.40	Average
5150.000	34.50	8.88	34.34	37.44	46.48	54.00	7.52	Average
@ 5176.300	34.63	8.90	34.32	87.60	96.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

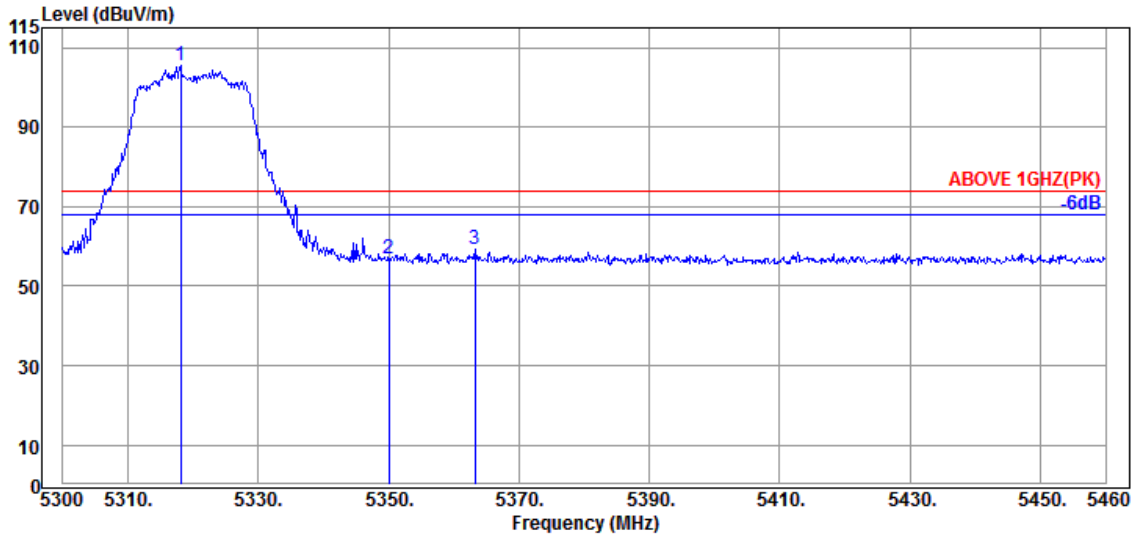

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.080	34.57	8.98	34.27	96.09	105.37	---	---	Peak
5350.080	34.90	8.99	34.26	47.29	56.92	74.00	17.08	Peak
5363.200	34.87	9.00	34.25	49.70	59.32	74.00	14.68	Peak

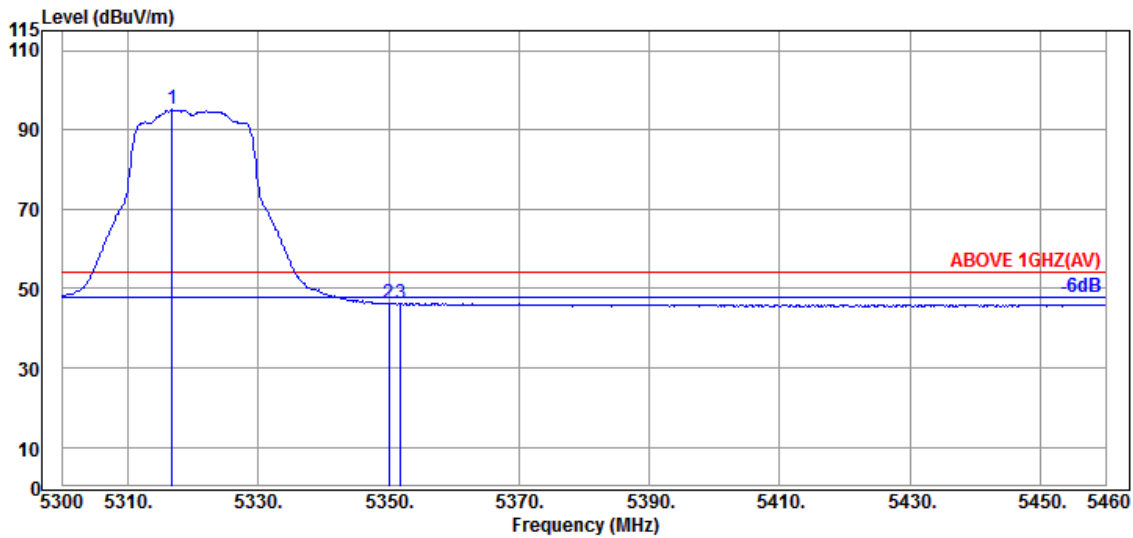


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.57	8.98	34.27	85.92	95.20	---	---	Average
5350.080	34.90	8.99	34.26	36.52	46.15	54.00	7.85	Average
5351.840	34.90	8.99	34.26	36.70	46.33	54.00	7.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

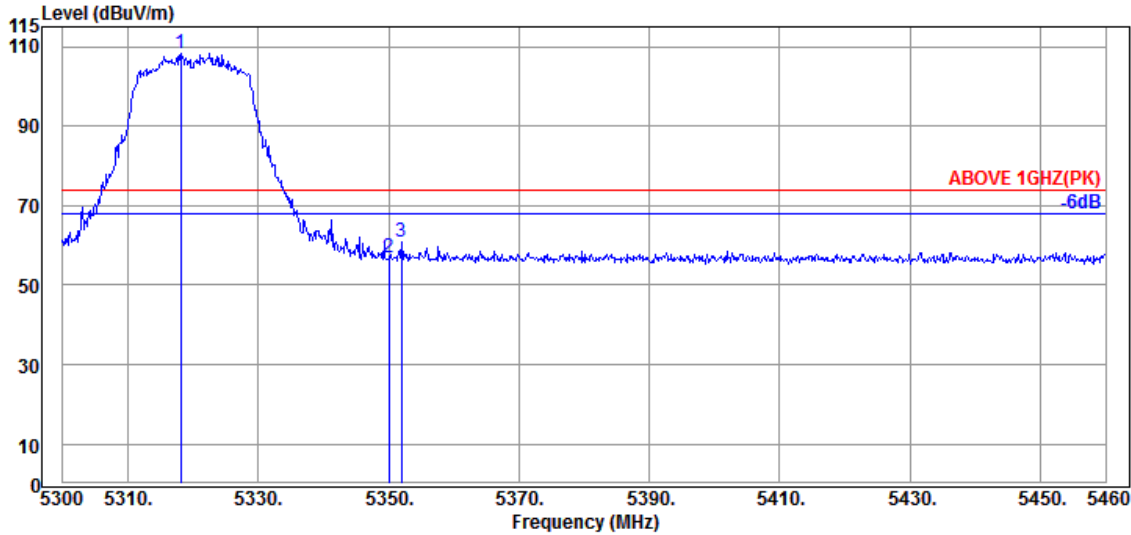

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.080	34.57	8.98	34.27	99.10	108.38	---	---	Peak
5350.080	34.90	8.99	34.26	47.12	56.75	74.00	17.25	Peak
5352.000	34.90	8.99	34.26	51.42	61.05	74.00	12.95	Peak

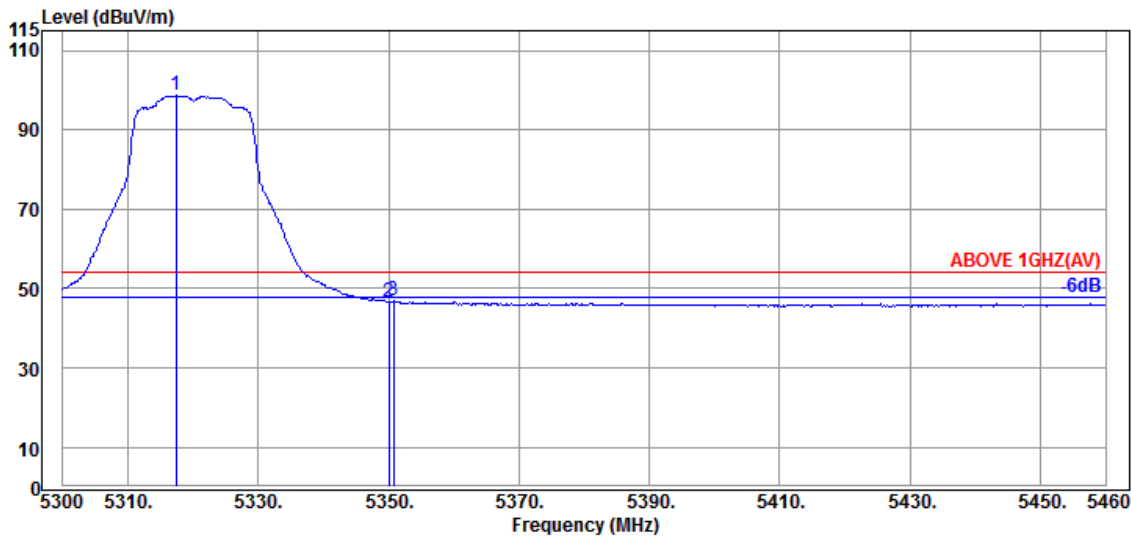


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	34.57	8.98	34.27	89.42	98.70	---	---	Average
5350.080	34.90	8.99	34.26	37.10	46.73	54.00	7.27	Average
5350.720	34.90	8.99	34.26	37.31	46.94	54.00	7.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

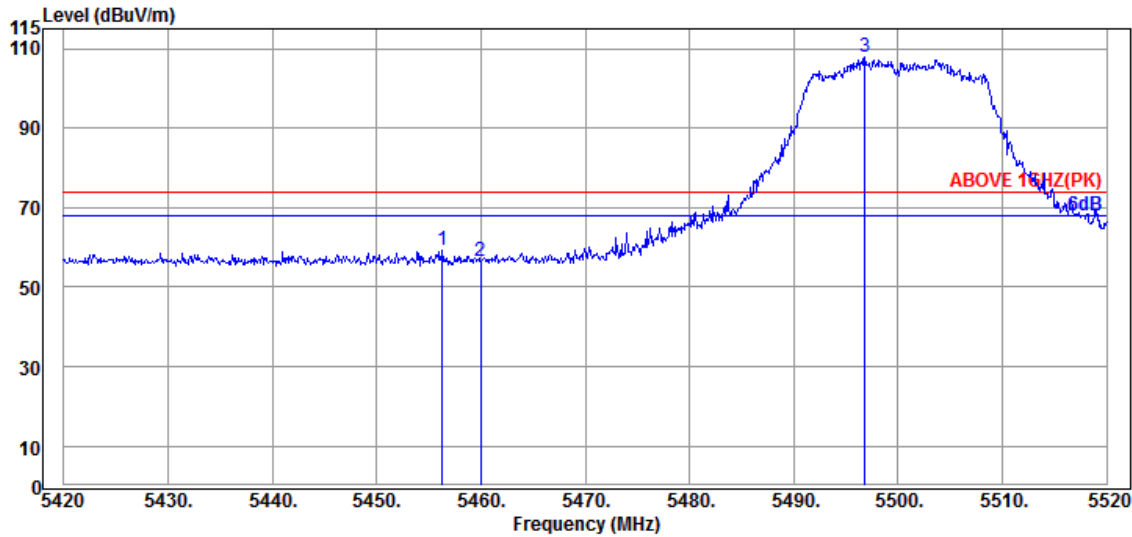

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.300	34.60	9.05	34.21	49.91	59.35	74.00	14.65	Peak
5460.000	34.60	9.05	34.21	46.90	56.34	74.00	17.66	Peak
@ 5496.800	34.70	9.08	34.20	98.45	108.03	---	---	Peak

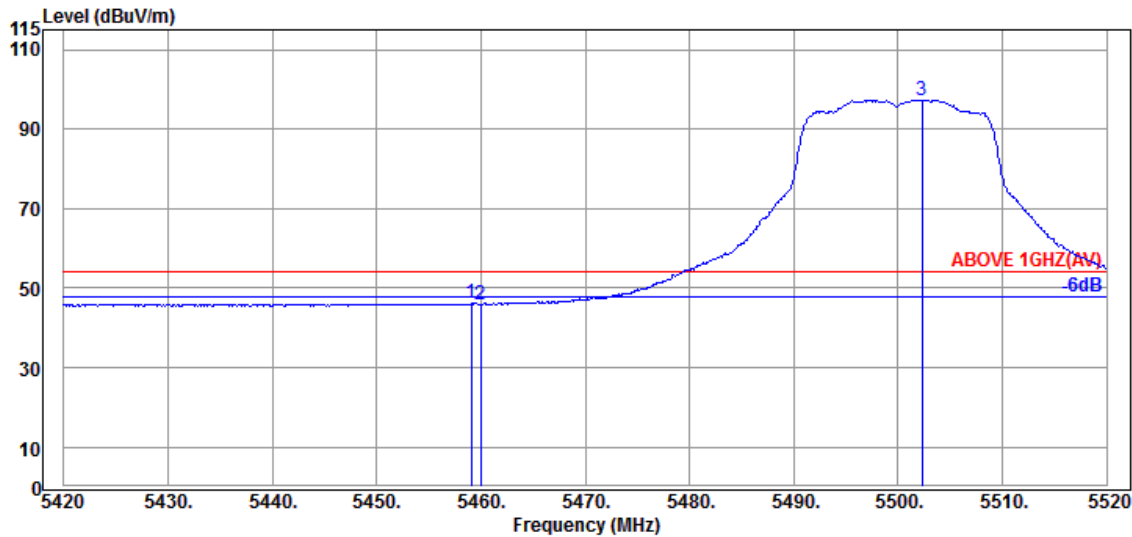


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.100	34.60	9.05	34.21	36.76	46.20	54.00	7.80	Average
5460.000	34.60	9.05	34.21	36.43	45.87	54.00	8.13	Average
@ 5502.300	34.70	9.08	34.20	87.81	97.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

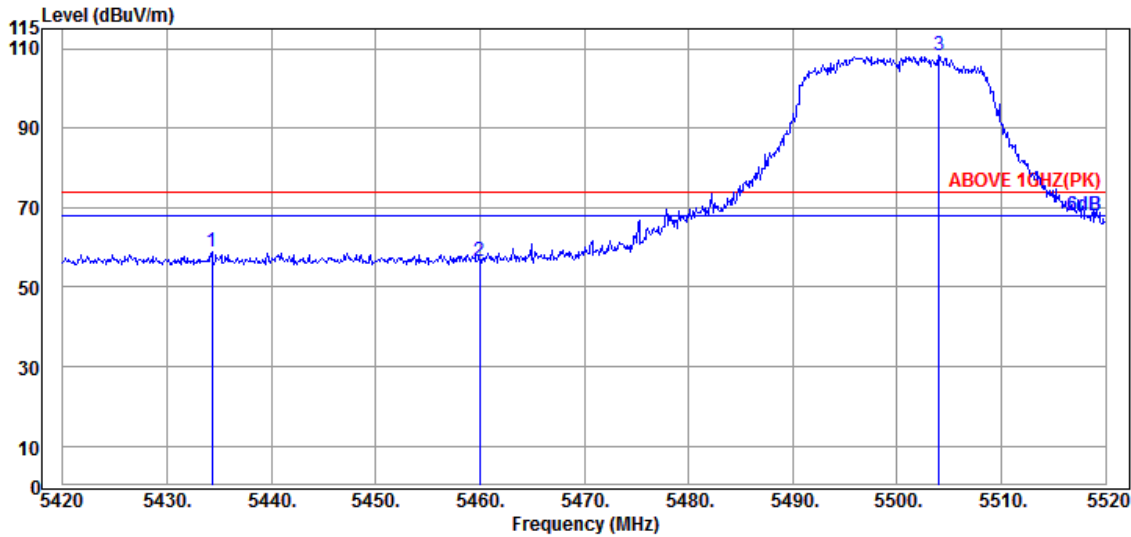

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.300	34.65	9.04	34.22	49.48	58.95	74.00	15.05	Peak
5460.000	34.60	9.05	34.21	47.17	56.61	74.00	17.39	Peak
@ 5504.000	34.70	9.08	34.20	98.87	108.45	---	---	Peak

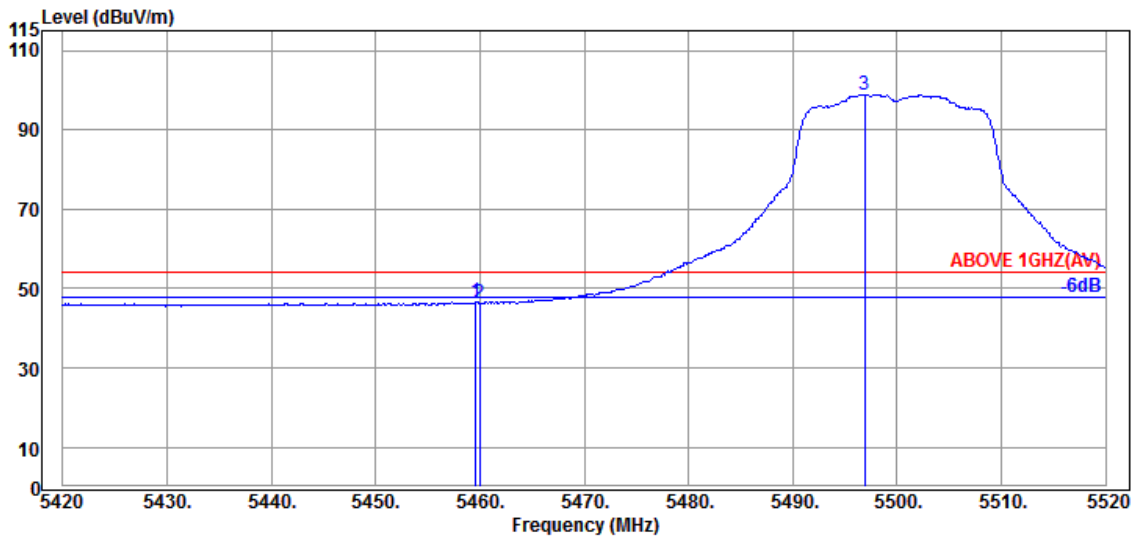


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.60	9.05	34.21	37.04	46.48	54.00	7.52	Average
5460.000	34.60	9.05	34.21	36.85	46.29	54.00	7.71	Average
@ 5496.900	34.70	9.08	34.20	89.37	98.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

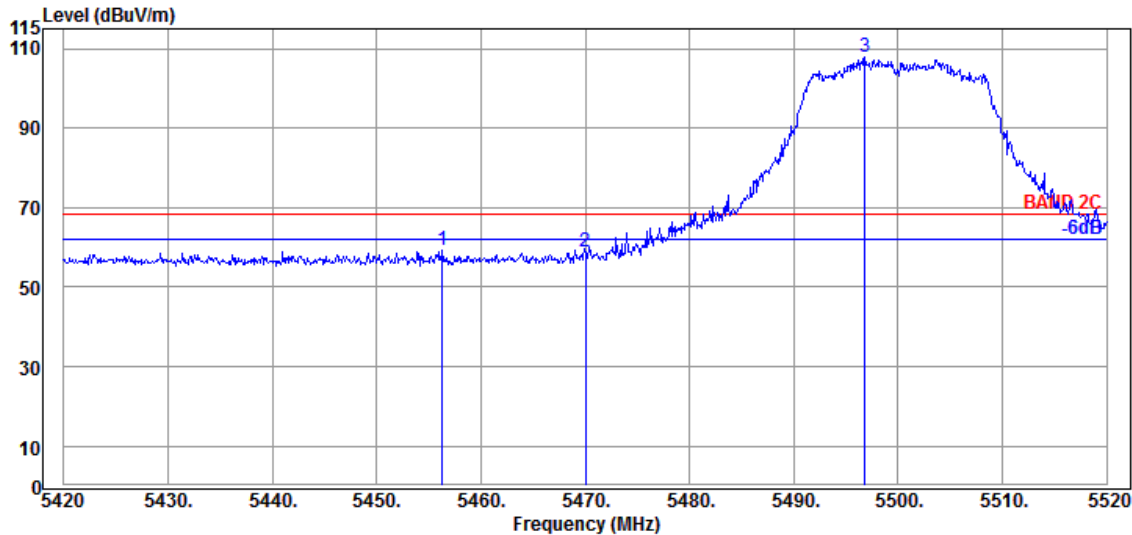

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.300	34.60	9.05	34.21	49.91	59.35	68.20	8.85	Peak
5470.000	34.63	9.06	34.21	49.41	58.89	68.20	9.31	Peak
@ 5496.800	34.70	9.08	34.20	98.45	108.03	---	---	Peak

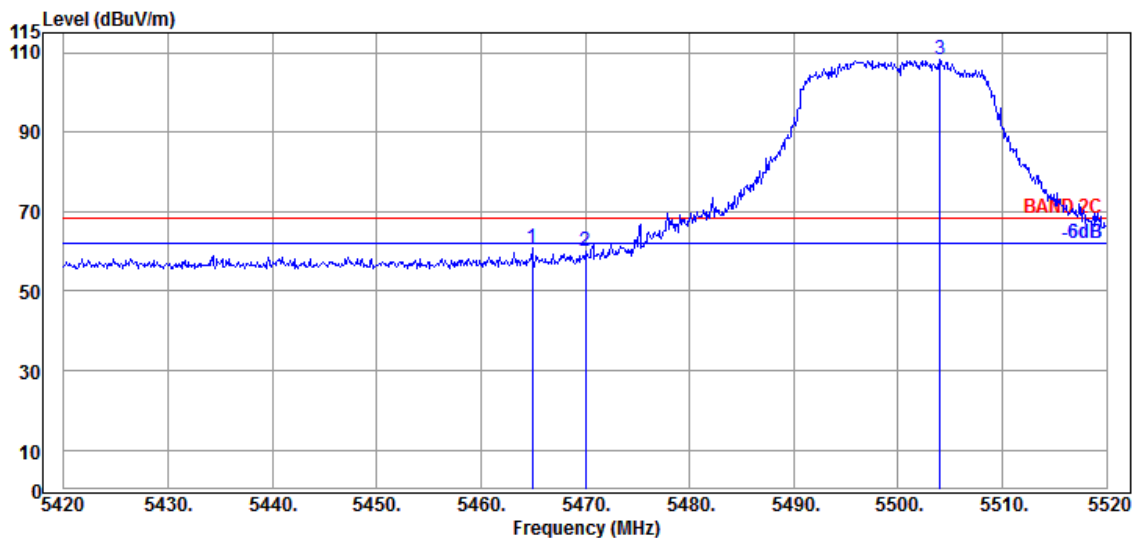


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.63	9.06	34.21	51.36	60.84	68.20	7.36	Peak
5470.000	34.63	9.06	34.21	50.51	59.99	68.20	8.21	Peak
@ 5504.000	34.70	9.08	34.20	98.87	108.45	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

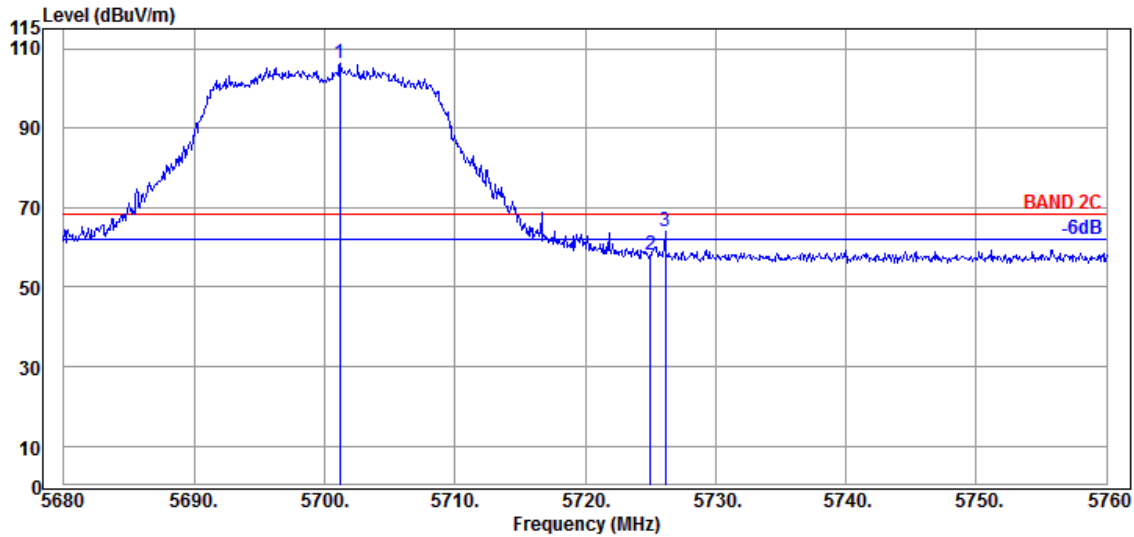

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.200	34.70	9.18	34.29	96.57	106.16	---	---	Peak
5725.040	34.90	9.20	34.30	48.14	57.94	68.20	10.26	Peak
5726.160	34.90	9.20	34.30	54.38	64.18	68.20	4.02	Peak

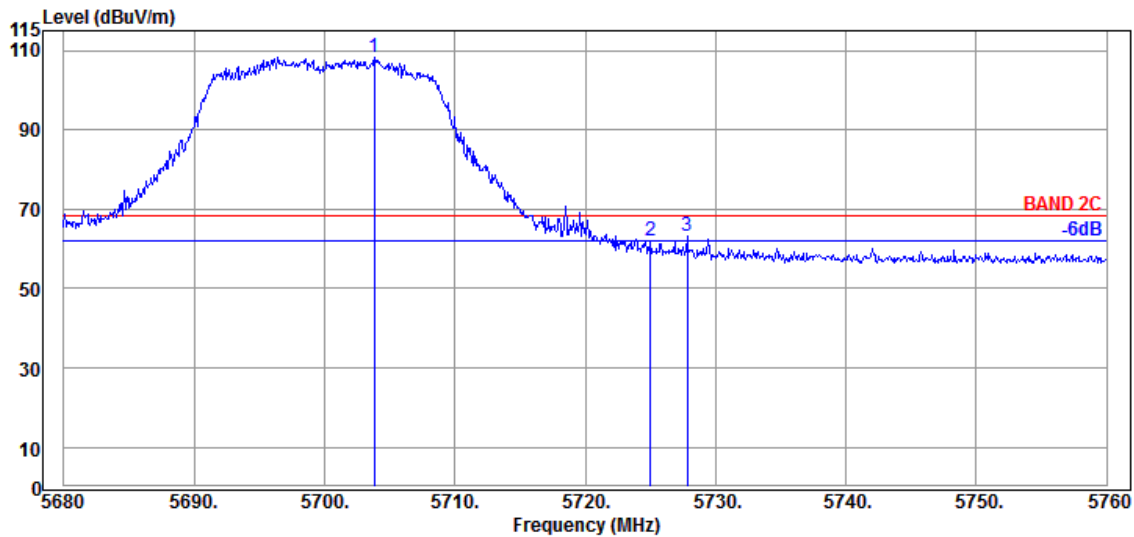


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.840	34.70	9.18	34.29	98.61	108.20	---	---	Peak
5725.040	34.90	9.20	34.30	52.12	61.92	68.20	6.28	Peak
5727.840	34.90	9.20	34.31	53.55	63.34	68.20	4.86	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

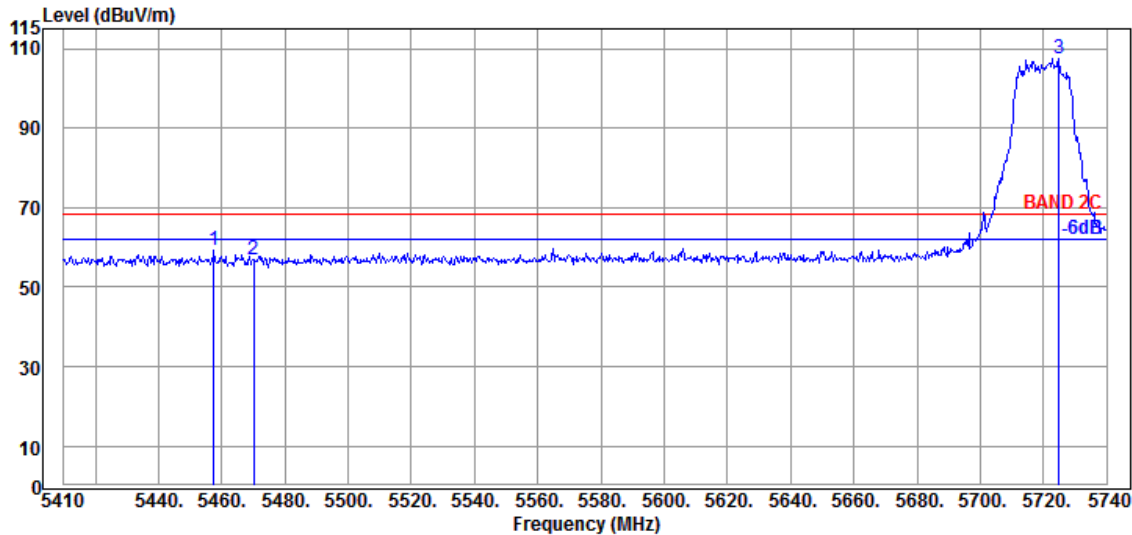

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.520	34.60	9.05	34.21	50.00	59.44	68.20	8.76	Peak
5470.060	34.63	9.06	34.21	47.36	56.84	68.20	11.36	Peak
@ 5724.820	34.90	9.20	34.30	97.70	107.50	---	---	Peak

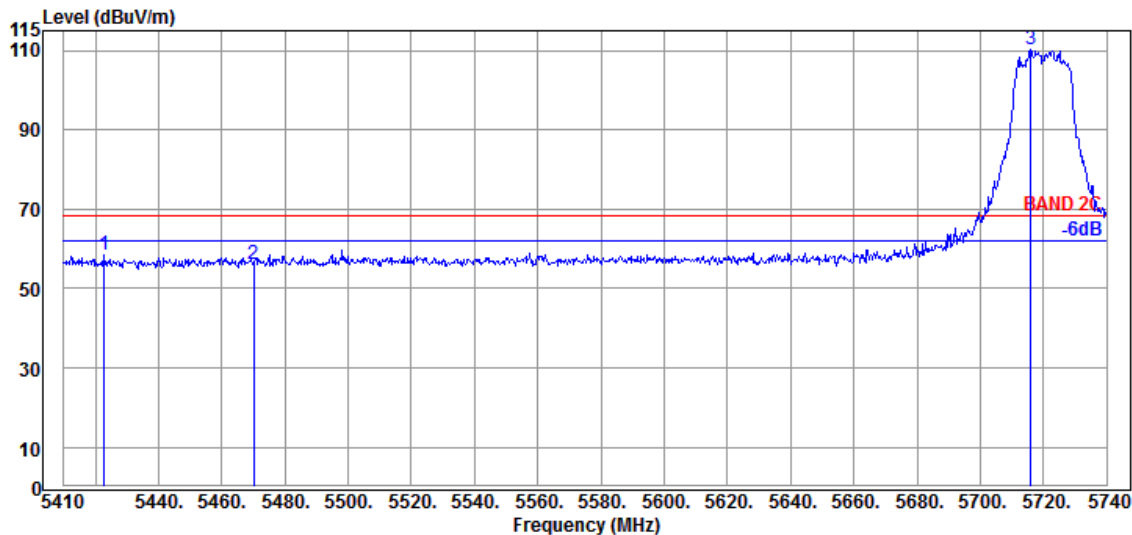


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.870	34.70	9.04	34.23	48.93	58.44	68.20	9.76	Average
5470.060	34.63	9.06	34.21	46.58	56.06	68.20	12.14	Average
@ 5715.910	34.80	9.19	34.30	100.69	110.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

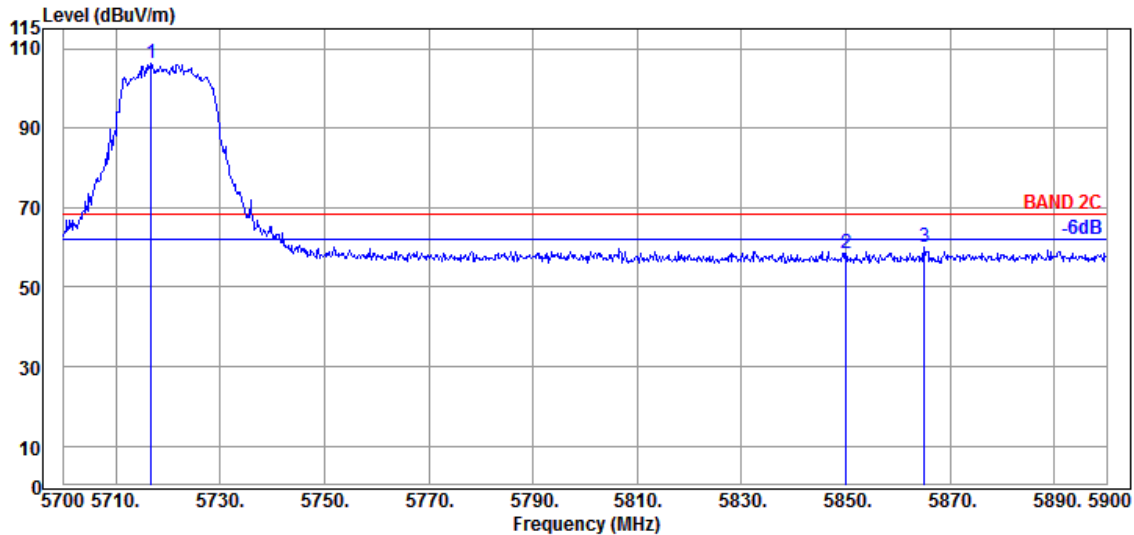

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.800	34.80	9.19	34.30	96.70	106.39	---	---	Peak
5850.000	35.40	9.25	34.36	48.24	58.53	68.20	9.67	Peak
5865.000	35.53	9.26	34.37	49.78	60.20	68.20	8.00	Peak

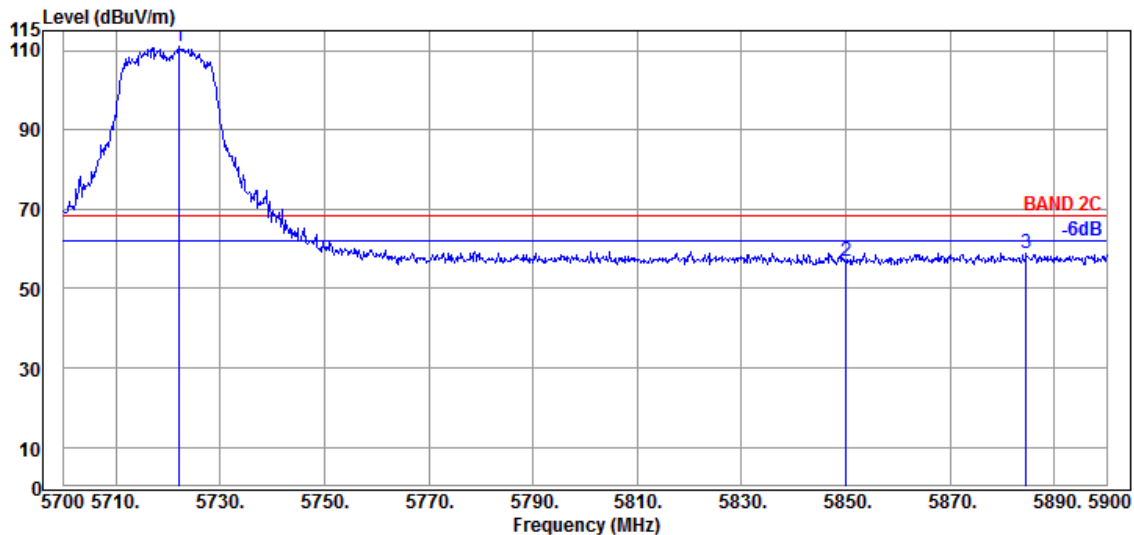


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.200	34.90	9.20	34.30	101.15	110.95	---	---	Peak
5850.000	35.40	9.25	34.36	46.61	56.90	68.20	11.30	Peak
5884.600	35.67	9.27	34.38	48.44	59.00	68.20	9.20	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

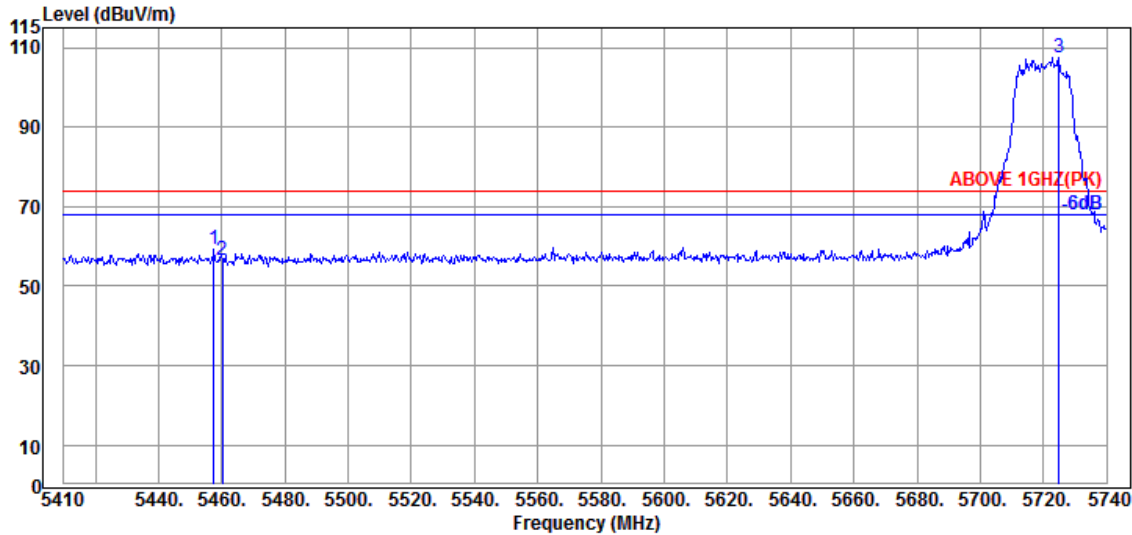

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.520	34.60	9.05	34.21	50.00	59.44	74.00	14.56	Peak
5460.160	34.60	9.05	34.21	47.18	56.62	74.00	17.38	Peak
@ 5724.820	34.90	9.20	34.30	97.70	107.50	---	---	Peak

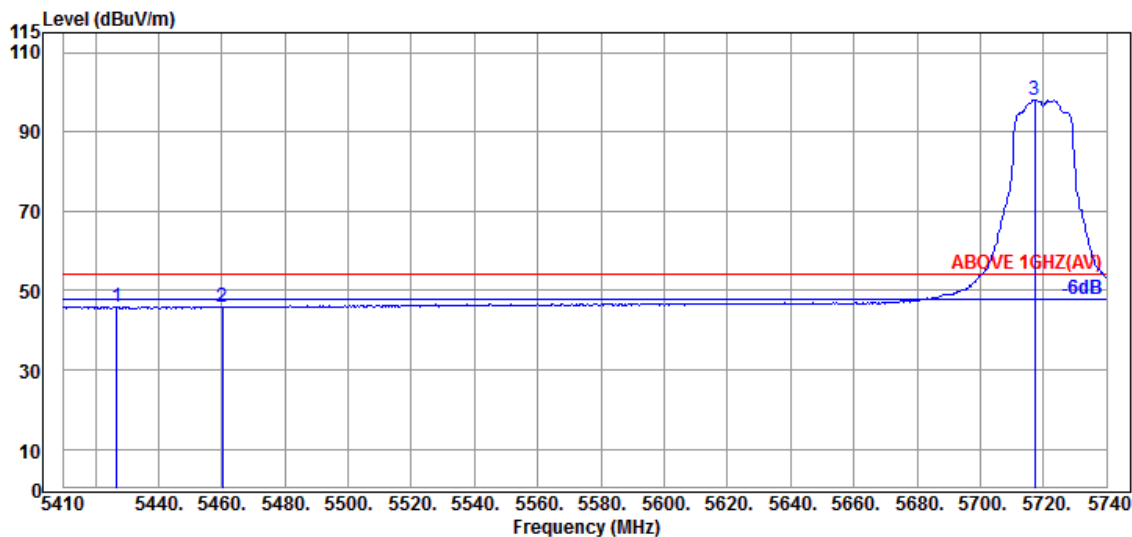


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.830	34.70	9.04	34.23	36.46	45.97	54.00	8.03	Average
5460.160	34.60	9.05	34.21	36.38	45.82	54.00	8.18	Average
@ 5717.230	34.80	9.19	34.30	88.40	98.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

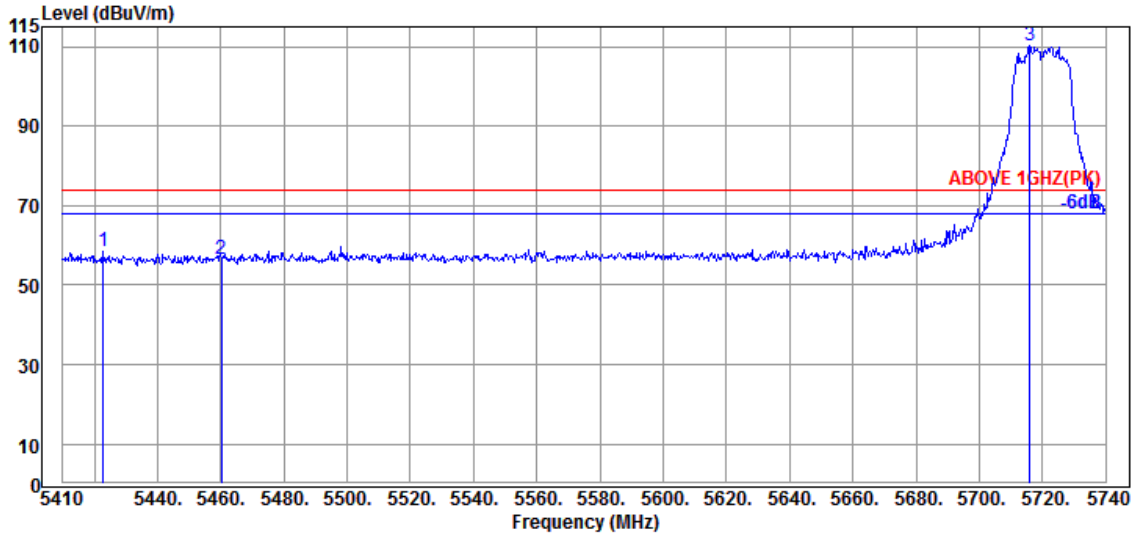

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.870	34.70	9.04	34.23	48.93	58.44	74.00	15.56	Peak
5460.160	34.60	9.05	34.21	46.92	56.36	74.00	17.64	Peak
@ 5715.910	34.80	9.19	34.30	100.69	110.38	---	---	Peak

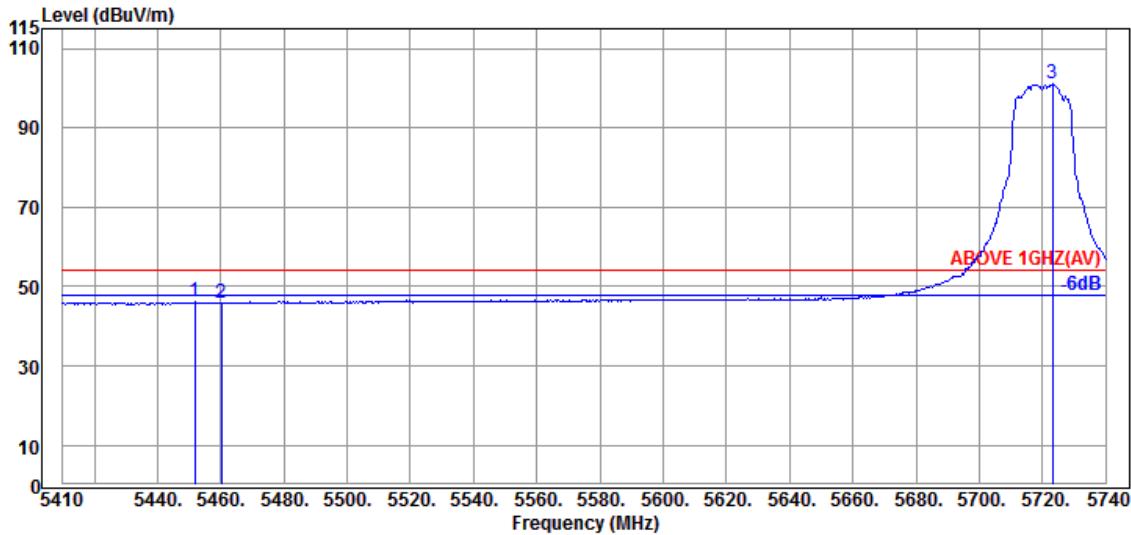


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.910	34.60	9.05	34.21	36.70	46.14	54.00	7.86	Average
5460.160	34.60	9.05	34.21	36.54	45.98	54.00	8.02	Average
@ 5723.170	34.90	9.20	34.30	91.30	101.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

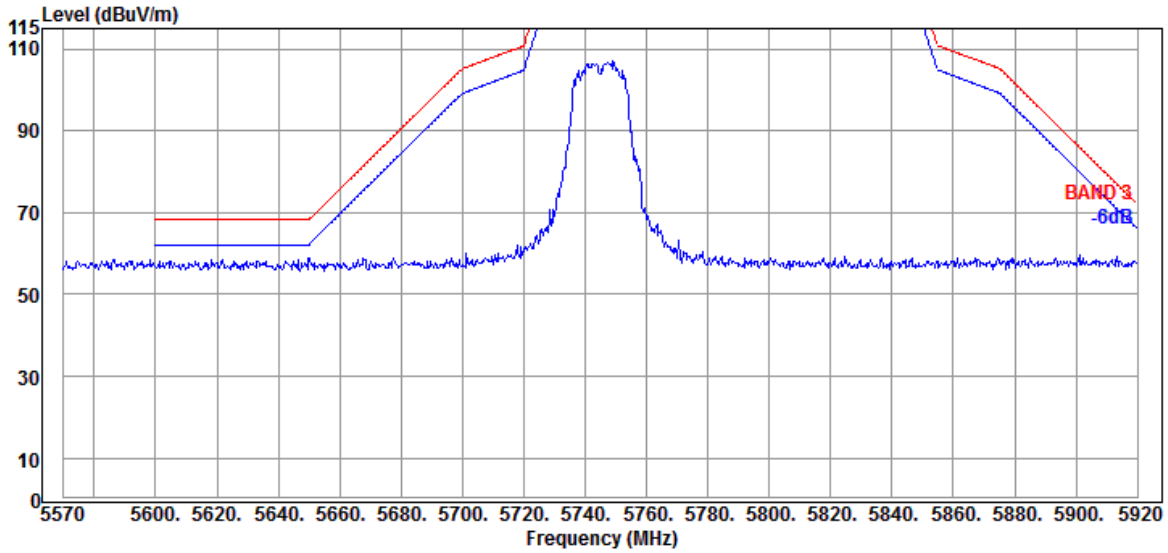


Antenna at Vertical Polarization

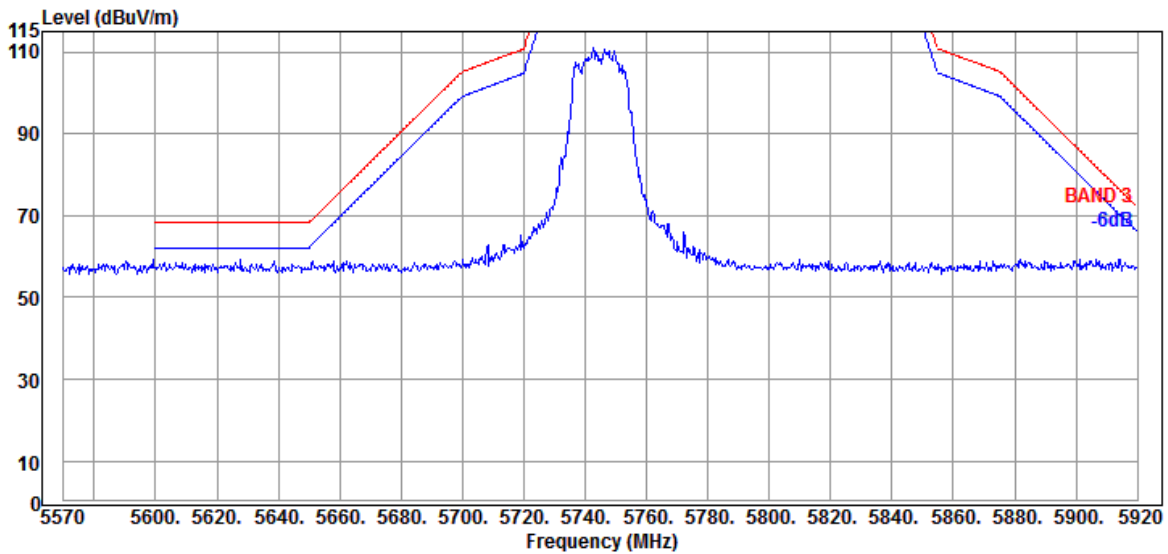

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

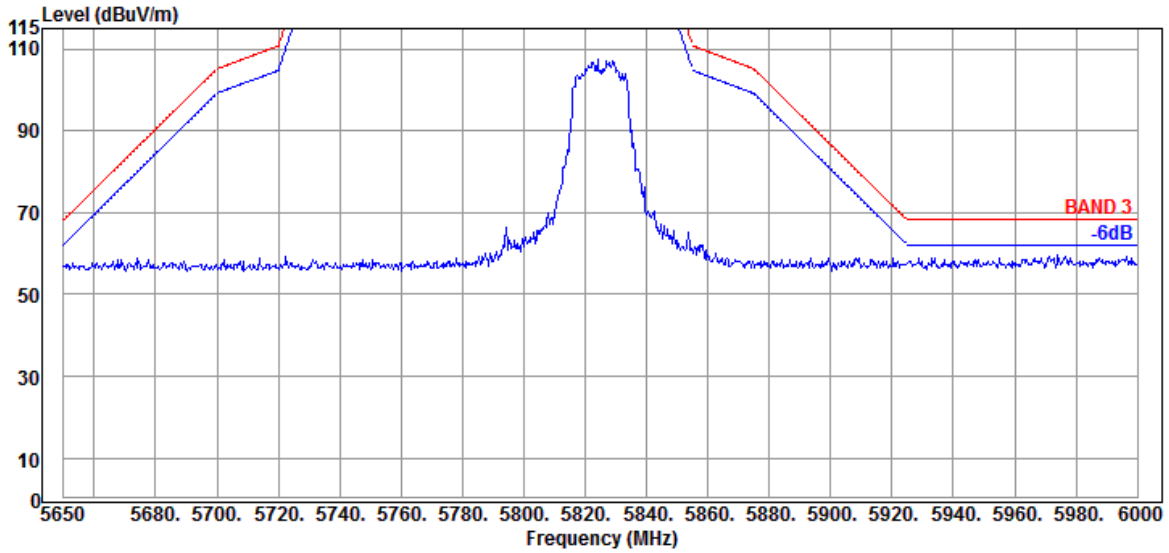

Antenna at Vertical Polarization

