

FCC 2.1093 SAR Test Report

for

LG Electronics Inc.

**222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do,
17709 Republic of Korea**

Product Name : Notebook PC
**Model Name : (1)16Z90R (2)16ZB90R
(3)16ZD90R (4)16ZG90R**
Brand : LG
FCC ID : BEJNT-16Z90R

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

TABLE OF CONTENTS

Description	Page
TEST REPORT.....	3
1. REVISION RECORD OF TEST REPORT	4
2. SUMMARY OF TEST RESULTS	5
3. GENERAL INFORMATION	6
3.1. Description of Application	6
3.2. Description of EUT	7
3.3. Reference Test Guidance.....	8
3.4. Antenna Information	8
3.5. EUT Specifications Assessed in Current Report	10
3.6. Description of Key Components	12
3.7. Test Environment	15
3.8. Description of Test Facility	15
3.9. Measurement Uncertainty	16
4. MEASUREMENT EQUIPMENTLIST.....	18
5. SAR MEASUREMENT SYSTEM.....	19
5.1. Definition of Specific Absorption Rate (SAR).....	19
5.2. SPEAG DASY System.....	19
5.3. SAR System Verification	27
5.4. SAR Measurement Procedure	45
6. SAR MEASUREMENT EVALUATION	48
6.1. Test Configuration and EUT setting.....	48
6.2. EUT Testing Position	49
6.3. Tissue Calibration Result	50
6.4. SAR Exposure Limits.....	51
6.5. Conducted Power Measurement.....	52
6.6. SAR Test Result	60

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TESTPHOTOGRAPHS

TEST REPORT

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory : LG Electronics Nanjing New Technology Co., Ltd.
EUT Description
(1) Product : Notebook PC
(2) Model : (1)16Z90R (2)16ZB90R (3)16ZD90R (4)16ZG90R
(3) Brand : LG
(4) Power Supply: DC 20V, 3.25A

Applicable Standards:

47 CFR FCC Part 2(§2.1093)

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2022. 12. 06

Reviewed by:

Annie Yu

(Annie Yu/Administrator)

Approved by:

Johnny Hsueh

(Johnny Hsueh/Section Manager)

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2022. 12. 06	Original Report	EM-SR220088

2. SUMMARY OF TEST RESULTS

Test SKU: SKU #1 (with INPAQ Antenna)

Highest Transmission SAR	Reported Body SAR _{1g}	Limit
WLAN 2.4G	1.040 W/kg	1.6 W/kg
BT	0.066 W/kg	1.6 W/kg
WLAN 5G	0.798 W/kg	1.6 W/kg

Test SKU: SKU #1 (with LUXSHARE-ICT Antenna)

Highest Transmission SAR	Reported Body SAR _{1g}	Limit
WLAN 2.4G	0.940 W/kg	1.6 W/kg
BT	0.033 W/kg	1.6 W/kg
WLAN 5G	0.842 W/kg	1.6 W/kg

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Factory	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Product	Notebook PC
Model	(1)16Z90R (2)16ZB90R (3)16ZD90R (4)16ZG90R The difference between all models is different in the sales customers and color difference.
Brand	LG

3.2. Description of EUT

Test Model	16Z90R		
Serial Number	N/A		
Power Rating	DC 20V, 3.25A		
Software Version	XY (X, Y can be 0 to 9 for different SW version not influence RF parameter)		
RF Features	WLAN:802.11 a/b/g/n/ac/ax Bluetooth: BT and BLE (BT 5.1)		
Transmit Type	2.4 GHz		
	802.11b		1T1R
	802.11g		1T1R
	802.11n-HT20		2T2R
	802.11n-HT40		2T2R
	802.11ax-HE20		2T2R
	802.11ax-HE40		2T2R
	BT/BLE		1T1R
	U-NII Bands		
	802.11a		1T1R
	802.11n-HT20/802.11ac-VHT20/802.11ax-HE20		2T2R
	802.11n-HT40/802.11ac-VHT40/802.11ax-HE40		2T2R
	802.11ac-VHT80/802.11ax-HE80		2T2R
	802.11ac-VHT160/802.11ax-HE160		2T2R
	The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).		
Software Version	N/A		
Sample Status	Trial sample		
Test Sample	Sample No.	Test Item	Firmware
	01	SAR	N/A
	03	SAR	N/A
Date of Receipt	2022. 10. 13		
Date of Test	2022. 10. 14 ~ 12. 06		
Interface Ports of EUT	<ul style="list-style-type: none"> • One HDMI Port • Two USB Type C Ports • One Earphone Port • One Micro SD Card Slot • Two USB 3.0 Ports 		
Accessories Supplied	<ul style="list-style-type: none"> • AC Adapter • USB C Cable • LAN Gender 		

3.3. Reference Test Guidance

- IEEE 1528-2013
- IEC/IEEE 62209-1528:2020
- KDB 447498 D04 Interim General RF Exposure Guidance v01
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04
- KDB 616217 D04 SAR for laptop and tablets v01r02
- KDB 248227 D01 802 11 Wi-Fi SAR v02r02

3.4. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)	
					Main	AUX
1.	WA-P-LELE-04-009	INPAQ	Mono-Pole	2400	2.2	1.9
				2450	2.3	2.4
				2500	3.1	2.3
				5150	4.2	3.6
				5400	4.2	3.7
				5850	4.0	3.5
				5925	4.3	3.5
				6525	4.2	3.5
				7125	4.1	2.3

According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then
 Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Note 1. 2.4G: Directional gain =
 2400MHz: Directional gain = $10 \log[(10^{2.2/10} + 10^{1.9/10})/2] = 2.05$ dBi
 2450MHz: Directional gain = $10 \log[(10^{2.3/10} + 10^{2.4/10})/2] = 2.35$ dBi

Note 2. 5G: Directional gain =
 5150MHz: $= 10 \log[(10^{4.2/10} + 10^{3.6/10})/2] = 3.91$ dBi
 5250MHz: $= 10 \log[(10^{4.2/10} + 10^{3.6/10})/2] = 3.91$ dBi
 5350MHz: $= 10 \log[(10^{4.2/10} + 10^{3.7/10})/2] = 3.96$ dBi
 5725MHz: $= 10 \log[(10^{4.0/10} + 10^{3.5/10})/2] = 3.76$ dBi
 5825MHz: $= 10 \log[(10^{4.0/10} + 10^{3.5/10})/2] = 3.76$ dBi

Note 3. UNII Band (WLAN 6G):
 5925MHz: Directional gain = $10 \log[(10^{4.3/10} + 10^{3.5/10})/2] = 3.92$ dBi
 6525MHz: Directional gain = $10 \log[(10^{4.2/10} + 10^{3.5/10})/2] = 3.86$ dBi
 7125MHz: Directional gain = $10 \log[(10^{4.1/10} + 10^{2.3/10})/2] = 3.29$ dBi

We chose the antenna gain corresponding to the frequency listed on the table which is closer to center frequency of WLAN.

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)	
					Main	AUX
2.	L1LRF008-CS-H	LUXSHARE-ICT	Mono-Pole	2400	6.3	0.9
				2450	5.7	1.6
				2500	2.7	3.5
				5150	-1.5	2.3
				5400	3.4	4.5
				5850	3.3	5.8
				5925	2.9	4.7
				6525	3.4	1.3
				7125	-4.9	-1.6

According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then
 Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Note 1. 2.4G: Directional gain =
 2400MHz: Directional gain = $10 \log[(10^{6.3/10} + 10^{0.9/10})/2] = 4.42\text{dBi}$
 2450MHz: Directional gain = $10 \log[(10^{5.7/10} + 10^{1.6/10})/2] = 4.11\text{dBi}$

Note 2. 5G: Directional gain =
 5150MHz: = $10 \log[(10^{-1.5/10} + 10^{2.3/10})/2] = 0.80\text{dBi}$
 5250MHz: = $10 \log[(10^{-1.5/10} + 10^{2.3/10})/2] = 0.80\text{dBi}$
 5350MHz: = $10 \log[(10^{3.4/10} + 10^{4.5/10})/2] = 3.99\text{dBi}$
 5725MHz: = $10 \log[(10^{3.3/10} + 10^{5.8/10})/2] = 4.70\text{dBi}$
 5825MHz: = $10 \log[(10^{3.3/10} + 10^{5.8/10})/2] = 4.70\text{dBi}$

Note 3. UNII Band (WLAN 6G):
 5925MHz: Directional gain = $10 \log[(10^{2.9/10} + 10^{4.7/10})/2] = 3.92\text{dBi}$
 6525MHz: Directional gain = $10 \log[(10^{3.4/10} + 10^{1.3/10})/2] = 2.48\text{dBi}$
 7125MHz: Directional gain = $10 \log[(10^{-4.9/10} + 10^{-1.6/10})/2] = -2.99\text{dBi}$

We chose the antenna gain corresponding to the frequency listed on the table which is closer to center frequency of WLAN.

3.5. EUT Specifications Assessed in Current Report

2.4GHz		
Mode	Fundamental Range (MHz)	Channel Number
802.11b	2412-2472	13
802.11g		13
802.11n-HT20		13
802.11n-HT40	2422-2462	9
Bluetooth	2402-2480	79
BLE	2402-2480	40

5GHz			
Mode	U-NII Band	Fundamental Range (MHz)	Channel Number
802.11a	I	5180-5240	4
	2A	5260-5320	4
	2C	5500-5720	12
	3	5745-5825	5
802.11n-HT20/ 802.11ac-VHT20 802.11ax-HE20	I	5180-5240	4
	2A	5260-5320	4
	2C	5500-5720	12
	3	5745-5825	5
802.11n-HT40/ 802.11ac-VHT40 802.11ax-HE40	I	5190-5230	2
	2A	5270-5310	2
	2C	5510-5710	6
	3	5755-5795	2
802.11ac-VHT80 802.11ax-HE80	I	5210	1
	2A	5290	1
	2C	5530-5690	3
	3	5775	1
802.11ac-VHT160 /802.11ax-HE160	I	5250	1
	2A		
	2C	5570	1

Remark: U-NII Band 2A and 2C (DFS Function, Slave/no In service monitor, no Ad-Hoc mode)

Mode	Modulation	Data Rate (Mbps)
802.11b	DSSS (DBPSK/DQPSK/CCK)	Up to 11
802.11g	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11a	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 144.4
802.11n-HT40		Up to 300
802.11ac-VHT20	OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)	Up to 173.3
802.11ac-VHT40		Up to 400
802.11ac-VHT80		Up to 866.7
802.11ac-VHT160		Up to 1733.3
802.11ax-HE20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/1024QAM)	Up to 287
802.11ax-HE40		Up to 574
802.11ax-HE80		Up to 1201
802.11ax-HE160		Up to 2402
Bluetooth	FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK)	1/2/3
BLE	GFSK (1M, 2M, PHY Coded S8, PHY Coded S2)	2

3.6. Description of Key Components

3.6.1. For the All Component Lists

Item	Supplier	Model / Type	Character
System	Microsoft	Win 10	---
		Win 10 Pro	
		Win11 Home	
Main Board	LG	ROYAL MAIN B/D	GM Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.
	LG	ROYAL NVIDIA MAIN B/D	PM Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited.
WLAN SUB Board	LG	16Z90R SUB B/D	Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 JiangSuHuaShen Electronic co.,Ltd (HXF) #3 Elec&Eltek Company (MCO) Limited.
CPU (Socket: BGA1744)	Intel	i7-1360P	2.2GHz
	Intel	i5-1340P	1.9GHz
16" LCD Panel	LG Display	LP160WQ1	Resolution: 2560 x 1600, 60Hz WQXGA IPS
	LG Display	LP160WQ2	Resolution: 2560 x 1600, 144Hz WQXGA IPS
Storage (SSD)	SK hynix	---	256GB
		---	512GB
		---	1TB
		---	2TB
	Samsung	---	256GB
		---	256GB
		---	512GB
		---	1TB
---	2TB		
Memory (RAM)	Samsung	---	16GB LPDDR5x(On Board)
		---	8GB LPDDR5x(On Board)
		---	32GB LPDDR5x(On Board)
	SK Hynix	---	16GB LPDDR5x(On Board)
		---	8GB LPDDR5x(On Board)
		---	32GB LPDDR5x(On Board)
Battery Pack	LG	LBY122CM	90Wh with PM M/B, DC 7.76V,90Wh
	LG	LBV7227E	80Wh with GM M/B DC 7.74V,80Wh
WLAN Combo Card	Intel	AX211D2W	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card FCC ID: PD9AX211D2 IC: 1000M-AX211D2
WLAN Combo Antenna	LG (INPAQ)	WA-P-LELE-04-009	PCB, Mono-pole Type Main: Black, Aux: Gray
	LG (Luxshare)	L1LRF008-CS-H	PCB, Mono-pole Type Main: Black, Aux: Gray

Item	Supplier	Model / Type	Character
Keyboard	TIC	KT0120B8	---
	LITE-ON	SN8B01	---
Touch Pad	LITE-ON	SP8001(SG-A0630-00A)	---
	ELAN	SD081A-36H0	---
Web Camera	Chicony	CKFLF26	---
	Luxvisions	1BF225N3	---
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111	(White) 10/100 Megabit Ethernet
		80-5946-101	(Black) 10/100 Megabit Ethernet
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10	(White) 10/100 Megabit Ethernet
		GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet
	HUIZHOU DEHONG TECHNOLOGY CO.,LTD.	370-50713	(White) 10/100 Megabit Ethernet
		370-50714	(Black) 10/100 Megabit Ethernet
Type C to LAN: Shielded, Undetached, 0.12m			
AC Adapter	LG (PI ELECTRONICS)	LP65WFC20P-NJ W	I/P: AC 100-240V, 1.6A, 50-60Hz O/P:DC 5V,3A(15W) or DC 9V, 3A(27W)or DC 15V,3A (45W) or DC 20V,3.25A (65W) (US Type, Wall-mount)
	LG (PI ELECTRONICS)	LP65WFC20P-NJ B	I/P: AC 100-240V, 1.6A, 50-60Hz O/P:DC 5V,3A(15W) or DC 9V, 3A(27W)or DC 15V,3A (45W) or DC 20V,3.25A (65W) (US Type, Wall-mount)
	Type C Cable, Shielded, Undetached, 2.0m		

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.6.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

SKU (Mode)		1	2	
Main Board	LG, ROYAL NVIDIA MAIN B/D (PM)	V		
	LG, ROYAL MAIN B/D (GM)		V	
SUB Board	LG, 16Z90R SUB B/D	V	V	
CPU	Intel, i7-1360P	V		
	Intel, i5-1340P		V	
16" LCD Panel	LG Display, LP160WQ2	V		
	LG Display, LP160WQ1		V	
Storage (SSD)	Samsung, 256GB	V		
	Samsung, 2TB	V		
	SK hynix, 256GB		V	
	SK hynix, 2TB		V	
Memory (RAM)	Samsung, 32GB	V		
	SK hynix, 32GB		V	
Battery Pack	LG, 90Wh	V		
	LG, 80Wh		V	
Keyboard	LITE-ON, SN8B01	V	V	
Touch Pad	LITE-ON, SP8001(SG-A0630-00A)	V	V	
Web Camera	Chicony, CKFLF26	V	V	
WLAN Combo Card	Intel, AX211D2W	V	V	
Type C #1	Link to LAN Gender	SUZHOU MEC ELECTRONICS, 80-5946-101	V	V
Type C #2	AC Adapter	LG (PI ELECTRONICS), LP65WFC20P-NJ B	V	V

Evaluation method	INPAQ	LUXSHARE-ICT	INPAQ	LUXSHARE-ICT
	SKU #1	SKU #1	SKU #2	SKU #2
2.4G Band	Full test	Full test	Worst case depend on INPAQ max SAR test result	Worst case depend on LUXSHARE-ICT max SAR test result
5G Band	Full test	Full test	Worst case depend on INPAQ max SAR test result	Worst case depend on LUXSHARE-ICT max SAR test result

3.7. Test Environment

Ambient conditions in the laboratory:

Item	Require	Actual
Temperature (°C)	18-25	22 ± 2
Humidity (%RH)	30-70	48 ± 2

3.8. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 (1) SAR Room

3.9. Measurement Uncertainty

DASY5 Uncertainty								
According to IEEE 1528-2013 and IEC 62209-1/2016 (0.3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty						±11%	±10.8%	387
Expanded STD Uncertainty						±22%	±21.5%	

DASY5 Uncertainty According to IEC 62209-2/2010 (30 MHz - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	∞
Axial Isotropy	±4.7%	R	√3	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	√3	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Readout Electronic	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	√3	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	√3	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	√3	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	√3	1	1	±1.7%	±1.7%	∞
Modulation Response	±2.5%	R	√3	1	1	±1.45 %	±1.45 %	∞
Post-processing	±3.8%	R	√3	1	1	±2.2%	±2.2%	∞
Test Sample Related								
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	√3	1	1	±2.9%	±2.9%	∞
Power Scaling	±0.0%	R	√3	1	1	±0.0%	±0.0%	∞
Phantom and Setup								
Phantom Uncertainty	±4.5%	R	√3	1	1	±2.4%	±2.4%	∞
SAR correction	±1.9%	R	√3	1	0.84	±1.9%	±1.9%	∞
Liquid Conductivity (target)	±5.0%	R	√3	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (mea.)DAK	±2.5%	R	√3	0.64	0.43	±0.9%	±0.6%	∞
Liquid Permittivity (target)	±5.0%	R	√3	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity(me.)DAK	±2.5%	R	√3	0.6	0.49	±0.9%	±0.7%	∞
Combined Std. Uncertainty						±11.0%	±10.9%	387
Expanded STD Uncertainty						±22.1%	±21.8%	

4. MEASUREMENT EQUIPMENT LIST

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Stäubli Robot TX90 XL	Stäubli	TX90	F12/5K9SA1/A101	N/A	N/A
2.	Controller	SPEAG	CS8c	N/A	N/A	N/A
3.	SAM Twin Phantom	SPEAG	N/A	1706	N/A	N/A
4.	ELI5 Phantom	SPEAG	N/A	1170	N/A	N/A
5.	Device Holder	SPEAG	N/A	N/A	N/A	N/A
6.	Data Acquisition Electronic	SPEAG	DAE4	1337	2022. 03. 29	1 Year
7.	E-Field Probe	SPEAG	EX3DV4	3855	2022. 09. 27	1 Year
8.	SAR Software	SPEAG	DASY52	V.52.8.8.1222	N/A	N/A
9.	ENA Network Analyzer	Agilent	E5071C-480	MY46214331	2022. 09. 27	1 Year
10.	Signal Generator	Aglient	N5181A	MY50143917	2022. 09. 07	1 Year
11.	Power Meter	Aglient	ML2487A	MY52180007	2022. 09. 07	1 Year
12.	Power Sensor	Aglient	N8481	MY52080006	2022. 09. 07	1 Year
13.	Dipole Antenna	SPEAG	D2450V2	888	2021. 09. 13	3 Years
14.	Dipole Antenna	SPEAG	D5GHzV2	1124	2021. 09. 27	3 Years

5. SAR MEASUREMENT SYSTEM

5.1. Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

5.2. SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

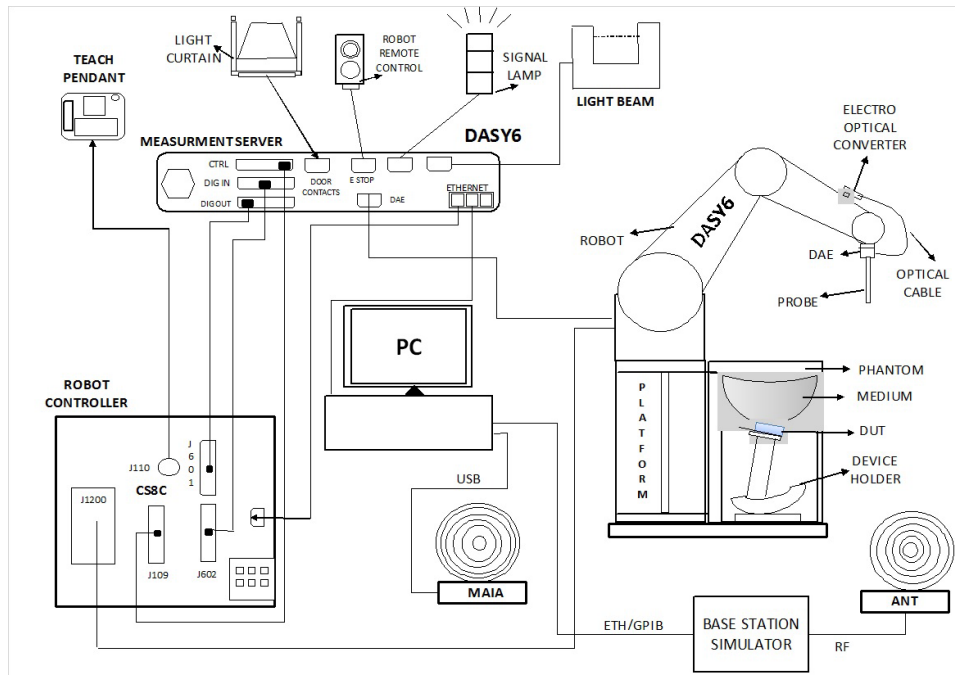


Fig-3.1 DASY6 System Setup


5.2.1. Robot

The DASY6 system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:


- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)




5.2.2. Probes


Model	EX3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

5.2.3. Data Acquisition Electronics (DAE)


Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	$< 5\mu$ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	


5.2.4. Phantom

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

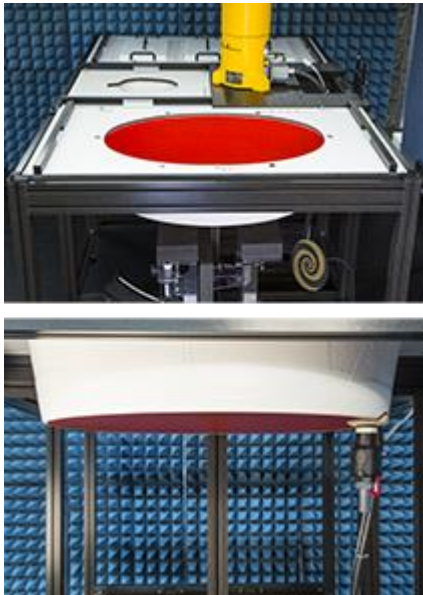
Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	

5.2.5. Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	


Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	

5.2.6. Reference Dipole

Model	System Validation Dipoles	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

5.2.7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-5.1.

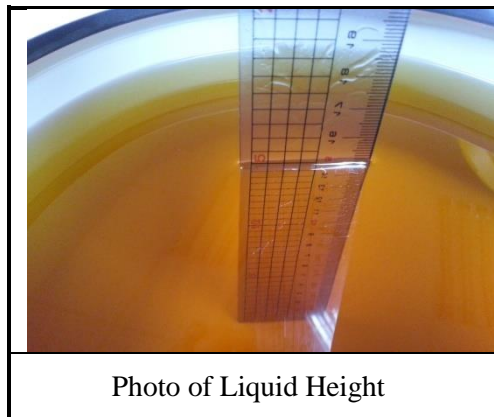

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528 and FCC OET 65 Supplement C Appendix C. For the body tissue simulating liquids, the dielectric properties are defined in FCC OET 65 Supplement C Appendix C. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

Table-5.1 Targets of Tissue Simulating Liquid

Target Frequency [MHz]	Target Permittivity (ϵ_r)	Range of $\pm 5\%$	Target Conductivity σ [s/m]	Range of $\pm 5\%$
750	41.9	39.805 ~ 43.995	0.89	0.846 ~ 0.935
835	41.5	39.425 ~ 43.575	0.90	0.855 ~ 0.945
900	41.5	39.425 ~ 43.575	0.97	0.922 ~ 1.019
1450	40.5	38.475 ~ 42.525	1.20	1.140 ~ 1.260
1640	40.3	38.285 ~ 42.315	1.29	1.226 ~ 1.355
1750	40.1	38.095 ~ 42.105	1.37	1.302 ~ 1.439
1800	40.0	38.000 ~ 42.000	1.40	1.330 ~ 1.470
1900	40.0	38.000 ~ 42.000	1.40	1.330 ~ 1.470
2000	40.0	38.000 ~ 42.000	1.40	1.330 ~ 1.470
2300	39.5	37.525 ~ 41.475	1.67	1.587 ~ 1.754
2450	39.2	37.240 ~ 41.160	1.80	1.710 ~ 1.890
2600	39.0	37.050 ~ 40.950	1.96	1.862 ~ 2.058
3500	37.9	36.005 ~ 39.795	2.91	2.765 ~ 3.056
5200	36.0	34.200 ~ 37.800	4.66	4.427 ~ 4.893
5300	35.9	34.105 ~ 37.695	4.76	4.522 ~ 4.998
5500	35.6	33.820 ~ 37.380	4.96	4.712 ~ 5.208
5600	35.5	33.725 ~ 37.275	5.07	4.817 ~ 5.324
5800	35.3	33.535 ~ 37.065	5.27	5.007 ~ 5.534
6000	35.1	33.345 ~ 36.855	5.48	5.206 ~ 5.754
6500	34.5	32.775 ~ 36.225	6.07	5.767 ~ 6.374
7000	33.9	32.205 ~ 35.595	6.65	6.318 ~ 6.983

Table-5.2-1 Recipes of Tissue Simulating Liquid, 30MHz to 900MHz

Frequency (MHz)	30	50		144		450		835	900	
Recipe source number	3	3	2	2	3	2	4	2	2	4
Ingredients (% by weight)										
De-ionized water	48,30	48,30	53,53	55,12	48,30	48,53	56	50,36	50,31	56
Tween 20			44,70	43,31		49,51		48,39	48,34	
Oxidized mineral oil							44			44
Diethyleneglycol monohexylether										
Triton X-100										
Diacetin	50,00	50,00			50,00					
DGBE										
NaCl	1,60	1,60	1,77	1,57	1,60	1,96		1,25	1,35	
Additives and salt	0,10	0,10			0,10					
Measured temperature dependence										
Temp. (°C)			21	21		21	20	21	21	20
$\epsilon_{\text{liquid temp. unc.}}$ (%)	0,8	0,1			0,1	0,1		0,04	0,04	
$\sigma_{\text{liquid temp. unc.}}$ (%)	2,8	2,8			2,6	4,2		1,6	1,6	

Table-5.2-2 Recipes of Tissue Simulating Liquid, 1800MHz to 10000MHz

Frequency (MHz)	1 800	2 450	4 000	5 000	5 200	5 800	6 000	8 000	10 000	
Recipe source number	2	4	4	4	4	1	1	4	5	5
Ingredients (% by weight)										
De-ionized water	54,23	56	56	56	56	65,53	65,53	56	67,8	66,0
Tween	45,27								31,1	33,0
Oxidized mineral oil		44	44	44	44			44		
Diethyleneglycol monohexylether						17,24	17,24			
Triton X-100						17,24	17,24			
Diacetin										
DGBE										
NaCl	0,50									
Additives and salt										
Measured temperature dependence										
Temp. (°C)	21	20	20	20	20	22	22	20	20	20
$\epsilon_{\text{liquid temp. unc.}}$ (%)	0,4					1,7	1,8			
$\sigma_{\text{liquid temp. unc.}}$ (%)	2,3					2,7	2,6			

NOTE 1 Multiple columns under a single frequency indicate optional recipes.


NOTE 2 Recipe source numbers: 1 verified by different labs, 2 Reference [59], 3 developed by IT'IS Foundation, 4 developed by IT'IS Foundation, 5 Reference [60].

NOTE 3 The values of $\epsilon_{\text{liquid temp. unc.}}$ and $\sigma_{\text{liquid temp. unc.}}$ are liquid temperature uncertainties described in O.9.6, based on measurements of the applicable liquid recipes given above. These are not part of the original publications but have been subsequently developed by the project team.

NOTE 4 The recipes at 8 000 MHz and 10 000 MHz are sufficiently broadband that they cover the frequency range of 6 000 MHz to 10 000 MHz within a tolerance of $\pm 10\%$ for permittivity and conductivity.

5.3. SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

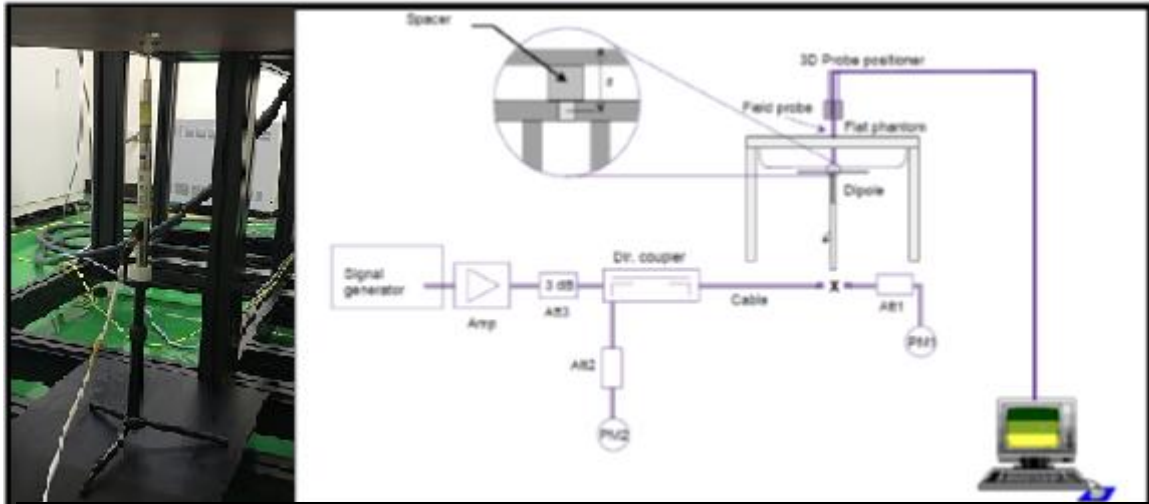

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touched to the phantom surface with a light pressure at the reference marking and is oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

5.3.1. SAR System Verification Result

Dipole Kit: D2450V2						
Test Date: 2022. 10. 16				Liquid Temp. [°C]: 21.0		
Frequency [MHz]	1g SAR			10g SAR		
2450MHz	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window
	13.4	53.6	52.9 47.61 to 58.19	6.28	25.12	24.8 22.32 to 27.28

Dipole Kit: D2450V2						
Test Date: 2022. 10. 19				Liquid Temp. [°C]: 21.0		
Frequency [MHz]	1g SAR			10g SAR		
2450MHz	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window
	13.2	52.8	52.9 47.61 to 58.19	6.25	25.0	24.8 22.32 to 27.28

Dipole Kit: D2450V2						
Test Date: 2022. 11. 23				Liquid Temp. [°C]: 22.0		
Frequency [MHz]	1g SAR			10g SAR		
2450MHz	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window
	13.5	54.0	52.9 47.61 to 58.19	6.27	25.08	24.8 22.32 to 27.28

Dipole Kit: D2450V2						
Test Date: 2022. 12. 05				Liquid Temp. [°C]: 21.0		
Frequency [MHz]	1g SAR			10g SAR		
2450MHz	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window
	13.8	55.2	52.9 47.61 to 58.19	6.39	25.56	24.8 22.32 to 27.28

Dipole Kit: D5GHzV2						
Test Date: 2022. 10. 14				Liquid Temp. [°C]: 20.0		
Frequency [MHz]	1g SAR			10g SAR		
5300MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.12	81.2	83.2 74.88 to 91.52	2.38	23.8	23.5 21.15 to 25.85

Dipole Kit: D5GHzV2						
Test Date: 2022. 10. 18				Liquid Temp. [°C]: 20.0		
Frequency [MHz]	1g SAR			10g SAR		
5300MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.47	84.7	83.2 74.88 to 91.52	2.46	24.6	23.5 21.15 to 25.85

Dipole Kit: D5GHzV2						
Test Date: 2022. 12. 06				Liquid Temp. [°C]: 22.0		
Frequency [MHz]	1g SAR			10g SAR		
5300MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.62	86.2	83.2 74.88 to 91.52	2.37	23.7	23.5 21.15 to 25.85

Dipole Kit: D5GHzV2						
Test Date: 2022. 10. 14				Liquid Temp. [°C]: 20.0		
Frequency [MHz]	1g SAR			10g SAR		
5600MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.85	88.5	83.9 75.51 to 92.29	2.44	24.4	23.8 21.42 to 26.18

Dipole Kit: D5GHzV2						
Test Date: 2022. 10. 18				Liquid Temp. [°C]: 20.0		
Frequency [MHz]	1g SAR			10g SAR		
5600MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.62	86.2	83.9 75.51 to 92.29	2.5	25.0	23.8 21.42 to 26.18

Dipole Kit: D5GHzV2						
Test Date: 2022. 12. 06				Liquid Temp. [°C]: 22.0		
Frequency [MHz]	1g SAR			10g SAR		
5600MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.74	87.4	83.9 75.51 to 92.29	2.57	25.7	23.8 21.42 to 26.18

Dipole Kit: D5GHzV2						
Test Date: 2022. 10. 14				Liquid Temp. [°C]: 20.0		
Frequency [MHz]	1g SAR			10g SAR		
5800MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.43	84.3	81.8 73.62 to 89.98	2.23	22.3	22.9 20.61 to 25.19

Dipole Kit: D5GHzV2						
Test Date: 2022. 10. 18				Liquid Temp. [°C]: 20.0		
Frequency [MHz]	1g SAR			10g SAR		
5800MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.21	82.1	81.8 73.62 to 89.98	2.38	23.8	22.9 20.61 to 25.19

Dipole Kit: D5GHzV2						
Test Date: 2022. 12. 06				Liquid Temp. [°C]: 22.0		
Frequency [MHz]	1g SAR			10g SAR		
5800MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window
	8.58	85.8	81.8 73.62 to 89.98	2.4	24.0	22.9 20.61 to 25.19

5.3.2. SAR System Check Data

Date: 10/16/2022

Test Laboratory: Audix_SAR Lab

System Check_H2450

DUT: D2450V2 - SN888


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=20$ mm, $dy=20$ mm
Maximum value of SAR (measured) = 17.4 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 87.99 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 28.6 W/kg
SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.28 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 49.5%
Maximum value of SAR (measured) = 15.4 W/kg

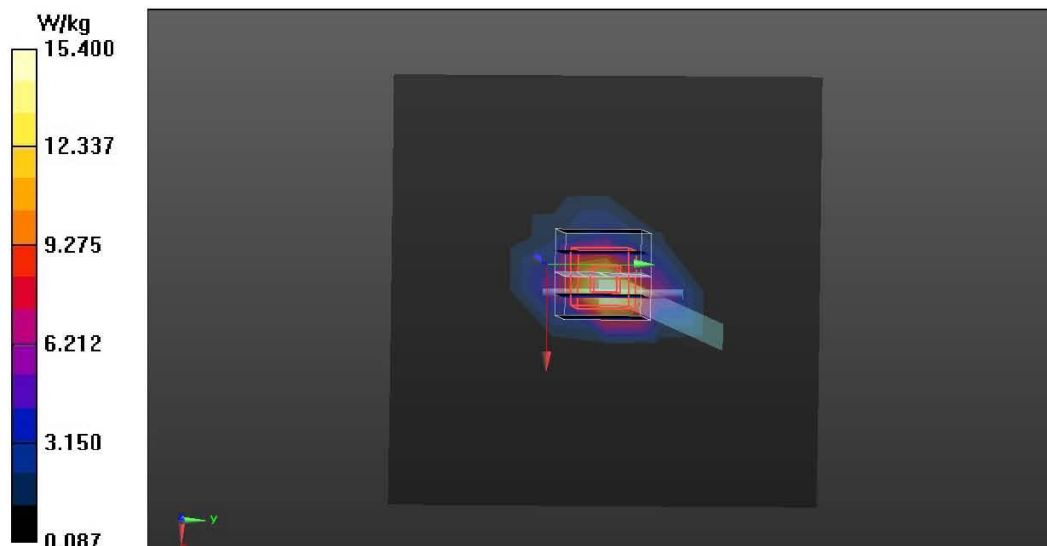

Date: 10/19/2022

Test Laboratory: Audix_SAR Lab

System Check_H2450

DUT: D2450V2 - SN888


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.765$ S/m; $\epsilon_r = 37.544$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=20$ mm, $dy=20$ mm
Maximum value of SAR (measured) = 17.5 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 87.99 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 28.7 W/kg
SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.25 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 49.5%
Maximum value of SAR (measured) = 15.4 W/kg

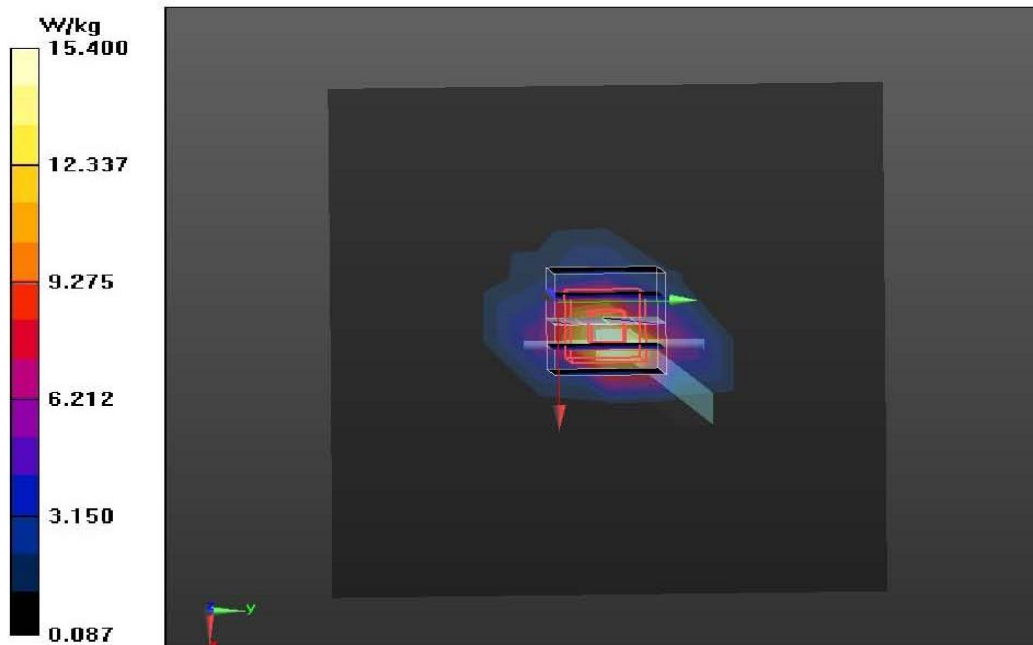

Date: 11/23/2022

Test Laboratory: Audix_SAR Lab

System Check_H2450**DUT: D2450V2 - SN888**


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.767$ S/m; $\epsilon_r = 38.605$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.7, 7.7, 7.7) @ 2450 MHz; Calibrated: 9/24/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=20$ mm, $dy=20$ mm
Maximum value of SAR (measured) = 17.9 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 87.58 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 27.3 W/kg
SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.27 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 46.8%
Maximum value of SAR (measured) = 15.8 W/kg

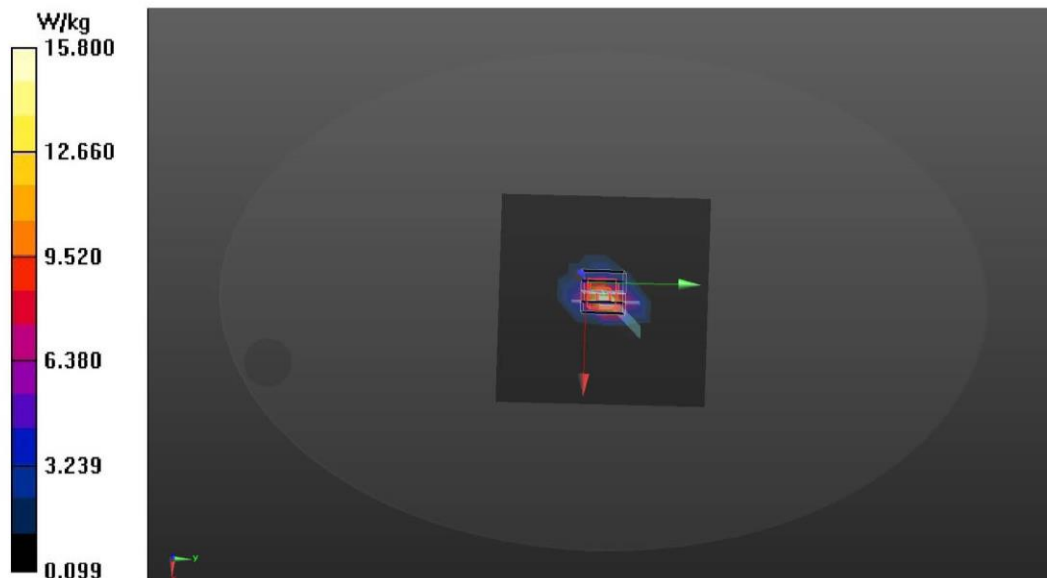

Date: 12/5/2022

Test Laboratory: Audix_SAR Lab

System Check_H2450**DUT: D2450V2 - SN888**


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=250mW/Area Scan (9x9x1): Measurement grid: $dx=20$ mm, $dy=20$ mm
Maximum value of SAR (measured) = 18.1 W/kg

P=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 88.96 V/m; Power Drift = 0.27 dB
Peak SAR (extrapolated) = 29.4 W/kg
SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.39 W/kg
Smallest distance from peaks to all points 3 dB below = 10.2 mm
Ratio of SAR at M2 to SAR at M1 = 50.8%
Maximum value of SAR (measured) = 15.9 W/kg

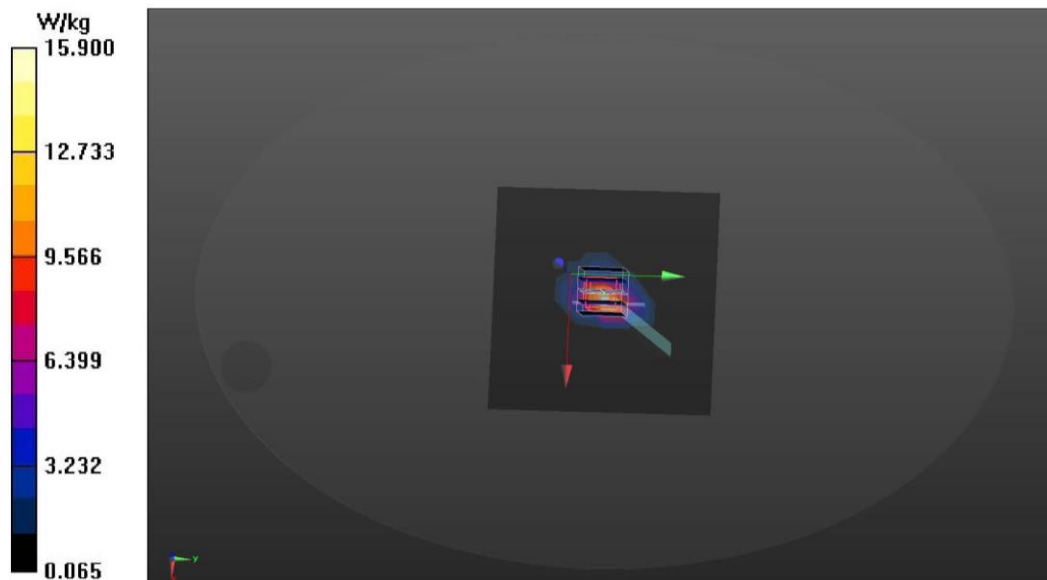

Date: 10/14/2022

Test Laboratory: Audix_SAR Lab

System Check_H5300**DUT: D5GHZV2 - SN1124**


Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.854$ S/m; $\epsilon_r = 35.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.14, 5.14, 5.14) @ 5300 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 16.5 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 46.72 V/m; Power Drift = -0.36 dB
Peak SAR (extrapolated) = 37.3 W/kg
SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.38 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 54.9%
Maximum value of SAR (measured) = 18.8 W/kg

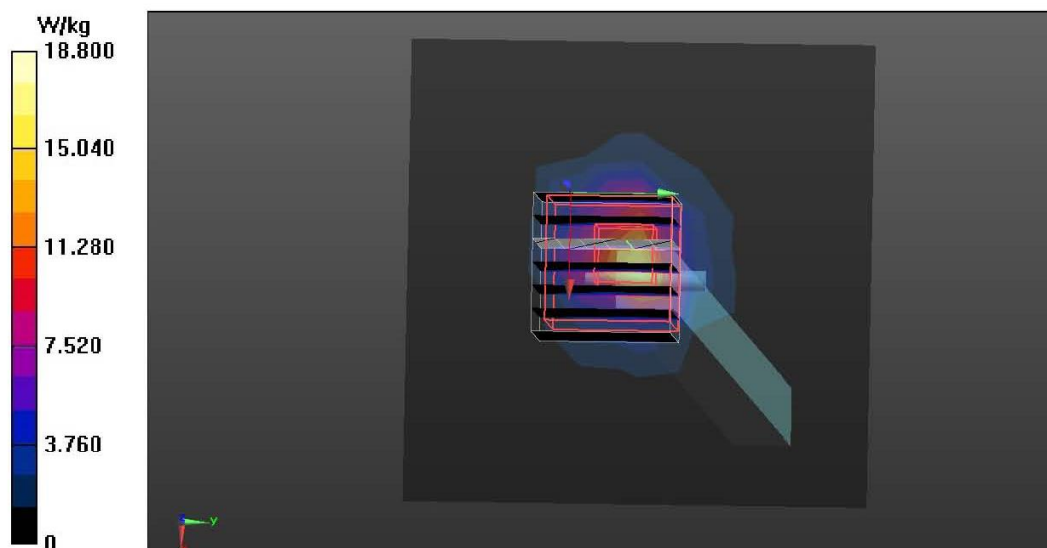

Date: 10/18/2022

Test Laboratory: Audix_SAR Lab

System Check_H5300

DUT: D5GHzV2 - SN1124


Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.875$ S/m; $\epsilon_r = 36.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.14, 5.14, 5.14) @ 5300 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 16.6 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 46.72 V/m; Power Drift = -0.36 dB
Peak SAR (extrapolated) = 37.5 W/kg
SAR(1 g) = 8.47 W/kg; SAR(10 g) = 2.46 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 54.9%
Maximum value of SAR (measured) = 18.9 W/kg

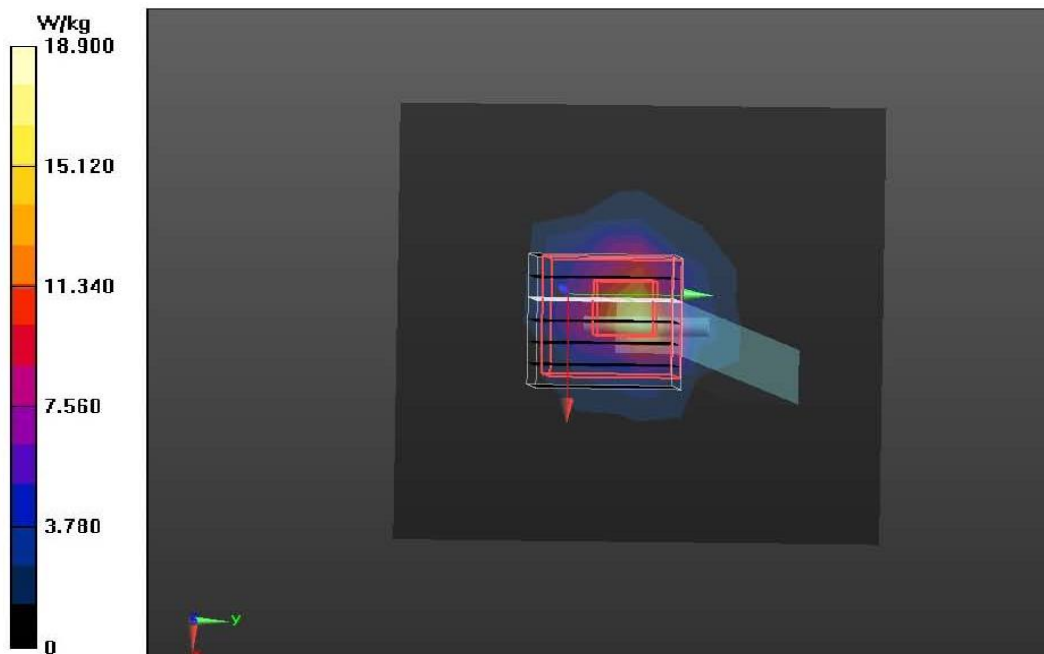

Date: 12/6/2022

Test Laboratory: Audix_SAR Lab

System Check_H5300**DUT: D5GHZV2 - SN1124**


Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.825$ S/m; $\epsilon_r = 35.411$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.14, 5.14, 5.14) @ 5300 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=100mW/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 17.3 W/kg

P=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 47.98 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 37.1 W/kg
SAR(1 g) = 8.62 W/kg; SAR(10 g) = 2.37 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 58.9%
Maximum value of SAR (measured) = 19.4 W/kg

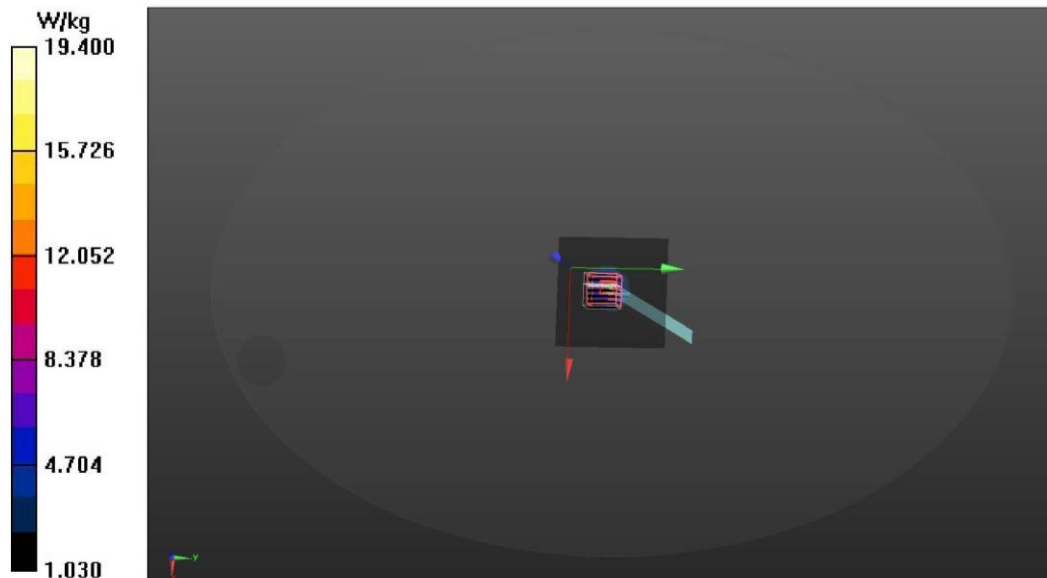

Date: 10/14/2022

Test Laboratory: Audix_SAR Lab

System Check_H5600

DUT: D5GHzV2 - SN1124


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.23$ S/m; $\epsilon_r = 35.043$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.72, 4.72, 4.72) @ 5600 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 17.4 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 43.83 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 38.4 W/kg
SAR(1 g) = 8.85 W/kg; SAR(10 g) = 2.44 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 54.2%
Maximum value of SAR (measured) = 18.9 W/kg

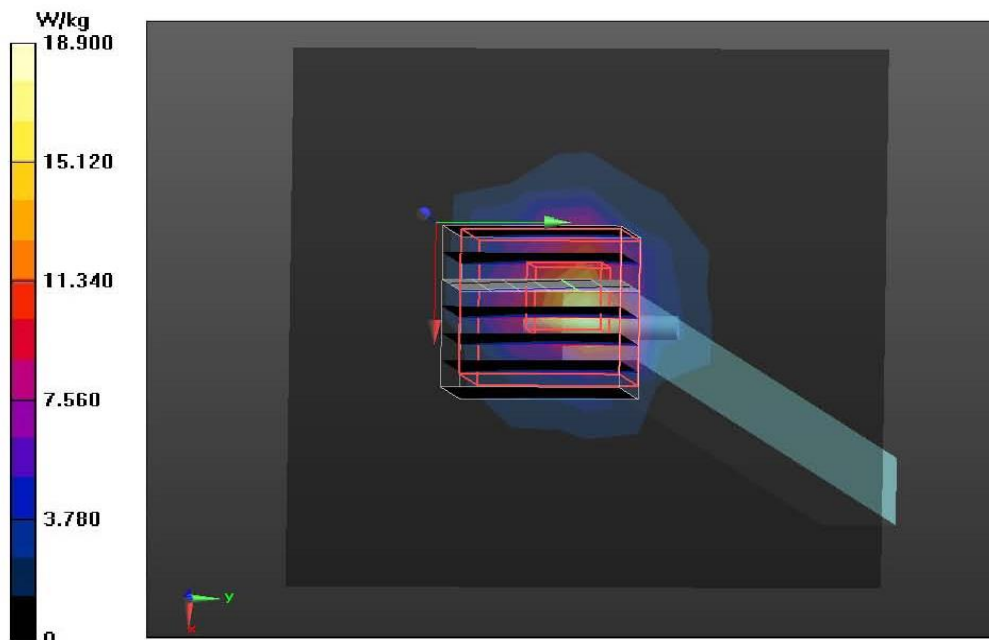

Date: 10/18/2022

Test Laboratory: Audix_SAR Lab

System Check_H5600

DUT: D5GHZV2 - SN1124


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.259$ S/m; $\epsilon_r = 36.237$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.72, 4.72, 4.72) @ 5600 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 17.5 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 43.83 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 38.7 W/kg
SAR(1 g) = 8.62 W/kg; SAR(10 g) = 2.5 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 54.2%
Maximum value of SAR (measured) = 19.0 W/kg

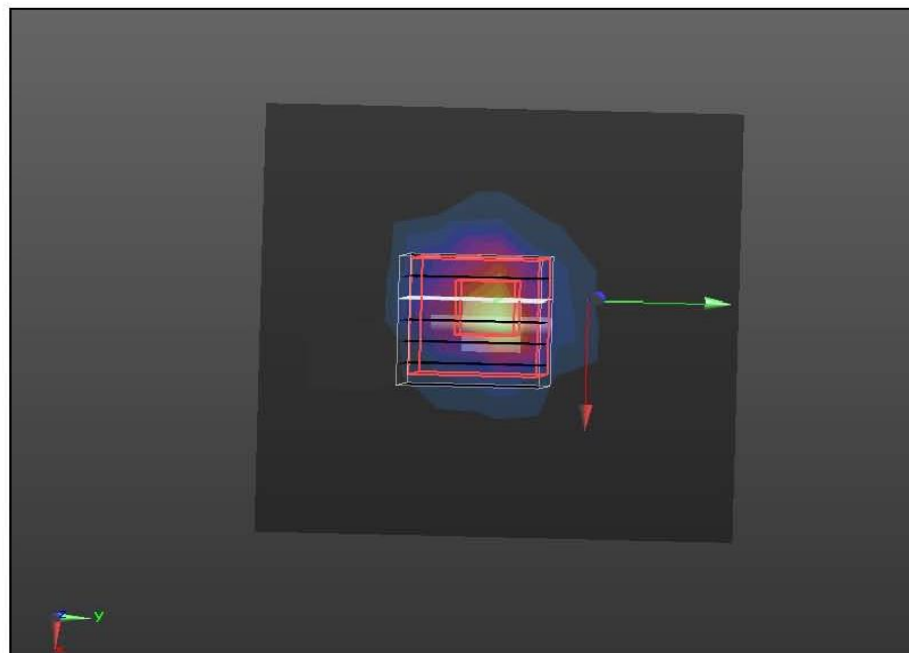

Date: 12/6/2022

Test Laboratory: Audix_SAR Lab

System Check_H5600**DUT: D5GHzV2 - SN1124**


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.204$ S/m; $\epsilon_r = 34.761$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.72, 4.72, 4.72) @ 5600 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=100mW/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 18.6 W/kg

P=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 46.41 V/m; Power Drift = 0.25 dB
Peak SAR (extrapolated) = 39.4 W/kg
SAR(1 g) = 8.74 W/kg; SAR(10 g) = 2.57 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 54.8%
Maximum value of SAR (measured) = 18.8 W/kg

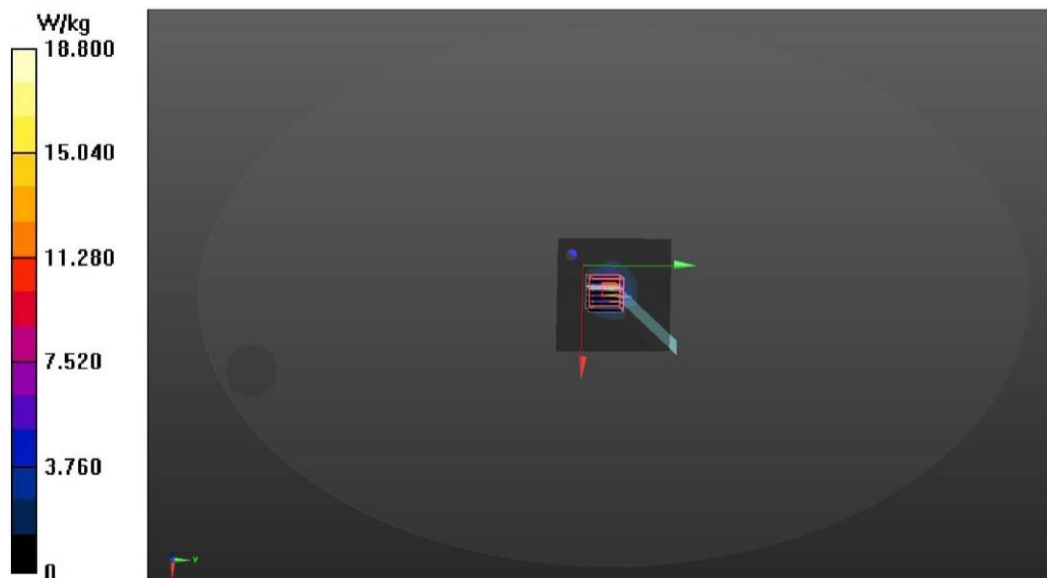

Date: 10/14/2022

Test Laboratory: Audix_SAR Lab

System Check_H5800

DUT: D5GHzV2 - SN1124


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.495$ S/m; $\epsilon_r = 34.609$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5800 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 18.8 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 44.65 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 43.6 W/kg
SAR(1 g) = 8.43 W/kg; SAR(10 g) = 2.23 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 54.3%
Maximum value of SAR (measured) = 21.8 W/kg

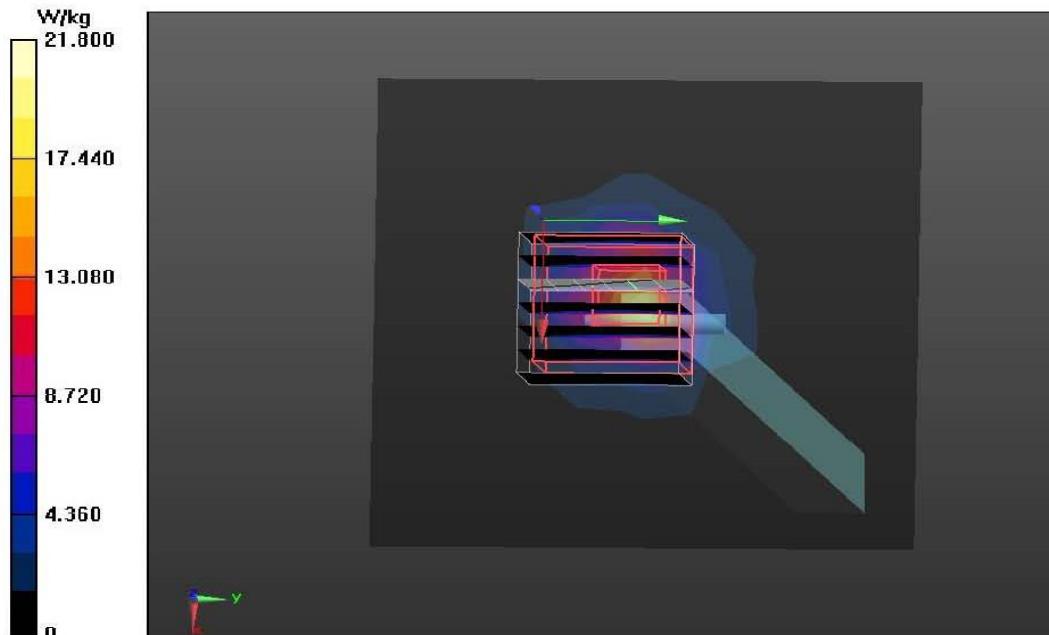

Date: 10/18/2022

Test Laboratory: Audix_SAR Lab

System Check_H5800**DUT: D5GHzV2 - SN1124**


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.509$ S/m; $\epsilon_r = 35.808$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5800 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 18.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 44.65 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 43.7 W/kg
SAR(1 g) = 8.21 W/kg; SAR(10 g) = 2.38 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 54.3%
Maximum value of SAR (measured) = 21.8 W/kg

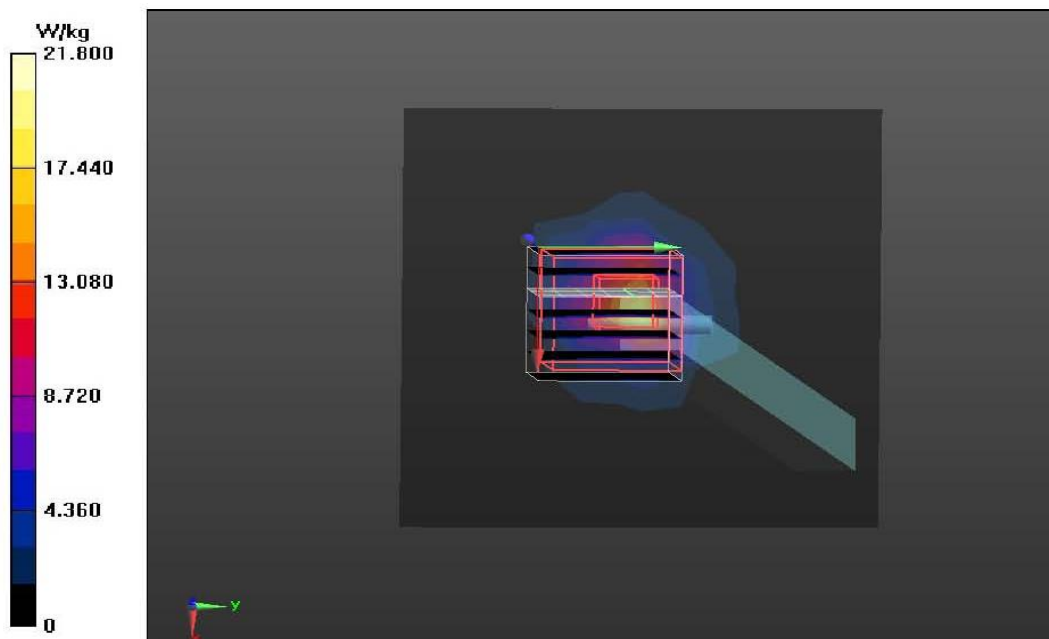

Date: 12/6/2022

Test Laboratory: Audix_SAR Lab

System Check_H5800**DUT: D5GHzV2 - SN1124**


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.462$ S/m; $\epsilon_r = 34.332$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5800 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=100mW/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 19.4 W/kg

P=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 46.32 V/m; Power Drift = 0.27 dB
Peak SAR (extrapolated) = 46.5 W/kg
SAR(1 g) = 8.58 W/kg; SAR(10 g) = 2.4 W/kg
Smallest distance from peaks to all points 3 dB below = 7.8 mm
Ratio of SAR at M2 to SAR at M1 = 51.7%
Maximum value of SAR (measured) = 20.3 W/kg

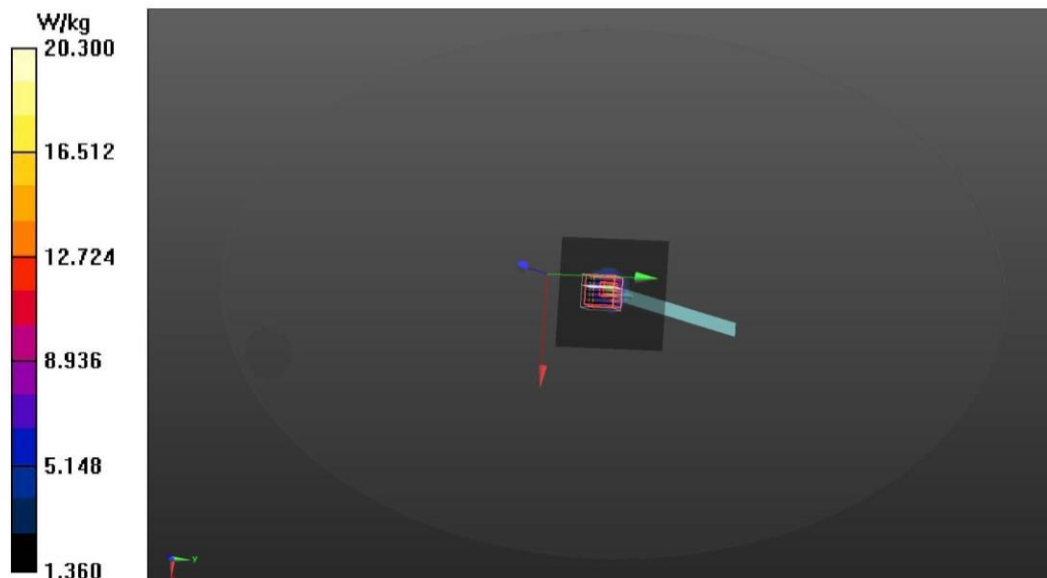

5.4. SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

5.4.1. Area & Zoom Scan Procedure

According to IEC/IEEE 62209-1528, the resolution for Area and Zoom scan is specified in the table below.

Items	≤ 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	≤ 15mm	≤ 12mm	≤ 12mm	≤ 10mm	≤ 10mm
Zoom Scan ($\Delta x, \Delta y$)	≤ 8mm	≤ 5mm	≤ 5mm	≤ 4mm	≤ 4mm
Zoom Scan (Δz)	≤ 5mm	≤ 5mm	≤ 4mm	≤ 3mm	≤ 2mm
Zoom Scan Volume	≥ 30mm	≥ 30mm	≥ 28mm	≥ 25mm	≥ 22mm

Note:

When zoom scan is required and report SAR is ≤ 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: ≤ 8 mm, 3-4GHz: ≤ 7 mm, 4-6GHz: ≤ 5 mm) may be applied.

According to IEC/IEEE 62209-1528, if the zoom scan measured as specified in the preceding paragraphs complies with both of the following items, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- (1) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions ($\Delta x, \Delta y$). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance Z_{M1} .
- (2) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x, y location of the measured maximum SAR value shall be at least 30%.

5.4.2. Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

5.4.3. Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

5.4.4. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

5.4.5. SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

6. SAR MEASUREMENT EVALUATION

6.1. Test Configuration and EUT setting

The standalone SAR test exclusion shall be refer to FCC § 1.1307 (b)(3)(i)(B) SAR-Based exemption which device determined the distance from antenna to user/bystander. The formula is

$$\begin{aligned}
 P_{th} \text{ (mW)} &= ERP_{20cm} (d / 20) && \text{for distance } d \leq 20\text{cm} \\
 P_{th} \text{ (mW)} &= ERP_{20cm} && \text{for distance } 20\text{cm} < d \leq 40\text{cm} \\
 X &= -\log_{10} \left(\frac{60}{ERP_{20cm} \sqrt{f}} \right) \\
 ERP_{20cm} \text{ (mW)} &&& \begin{aligned} &0.3 \text{ GHz} \leq f < 1.5 \text{ GHz: } 2040f \\ &1.5 \text{ GHz} \leq f \leq 6 \text{ GHz: } 3060 \end{aligned}
 \end{aligned}$$

F = GHz

P_{th} (mW) = available maximum time-average power or effective radiated power, whichever is greater.

D = the separation distance (cm)

From KDB 616217 D04 section 4.2 to 4.3, The SAR exclusion threshold can be applied to KDB 447498 to determine if SAR necessary test.

Test program “DRTU” is used for enabling EUT BT or WLAN function under continues transmitting and choosing data rate/ channel and supported stable power rating.

6.2. EUT Testing Position

SAR-Based exemption table

Centre Frequency (MHz)	5	10	15	20	25	Distance(mm)
2450	3.000	10.000	22.000	38.000	59.000	Power(mW)
5200	2.000	6.000	15.000	26.000	42.000	
5500	1.000	6.000	14.000	26.000	41.000	
5800	1.000	6.000	14.000	25.000	40.000	
	30	35	40	45	50	Distance(mm)
2450	83.000	111.000	143.000	179.000	219.000	Power(mW)
5200	61.000	84.000	110.000	110.000	110.000	
5500	59.000	82.000	108.000	108.000	108.000	
5800	58.000	80.000	106.000	106.000	106.000	
	7	10	15	20	25	Distance(cm)
2450	415.000	819.000	1770.000	3060.000	4678.000	Power(mW)
5200	350.000	731.000	1689.000	3060.000	4852.000	
5500	345.000	725.000	1683.000	3060.000	4865.000	
5800	341.000	719.000	1678.000	3060.000	4877.000	
	30	33	35	37	40	Distance(cm)
2450	6617.000	7932.000	8872.000	8872.000	11437.000	Power(mW)
5200	7071.000	8609.000	9722.000	9722.000	12809.000	
5500	7106.000	8662.000	9788.000	9788.000	12918.000	
5800	7139.000	8712.000	9851.000	9851.000	13021.000	

The SAR testing required mode is listed as below.

Antenna	Front Face	Rear Face	Top Side	Bottom Side	Left Side	Right Side	Screen Side
WLAN				√			√

According to SAR-Based exemption table, the laptop only need evaluate bottom side and screen side.

6.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Agilent Dielectric Probe Kit and Agilent E5071C Vector Network Analyzer.

Body Tissue Simulate Measurement					
Frequency [MHz]	Description	Dielectric Parameters			Liquid Temp. [°C]
		ϵ_r		σ [s/m]	
2450MHz	Reference result ± 5% window	39.2		1.8	N/A
		37.240	to 41.160	1.710 to 1.890	
	2022. 10. 16	38.93		1.761	21.0
	2022. 10. 19	37.544		1.765	21.0
	2022. 11. 23	39.029		1.735	22.0
	2022. 12. 05	38.949		1.752	21.0

Body Tissue Simulate Measurement					
Frequency [MHz]	Description	Dielectric Parameters			Liquid Temp. [°C]
		ϵ_r		σ [s/m]	
5300MHz	Reference result ± 5% window	35.9		4.76	N/A
		34.105	to 37.695	4.522 to 4.998	
	2022. 10. 14	35.7		4.854	20.0
	2022. 10. 18	36.9		4.875	20.0
	2022. 12. 06	35.411		4.825	22.0

Body Tissue Simulate Measurement					
Frequency [MHz]	Description	Dielectric Parameters			Liquid Temp. [°C]
		ϵ_r		σ [s/m]	
5600MHz	Reference result ± 5% window	35.50		5.07	N/A
		33.725	to 37.275	4.817 to 5.324	
	2022. 10. 14	35.043		5.23	20.0
	2022. 10. 18	36.237		5.259	20.0
	2022. 12. 06	34.762		5.204	22.0

Body Tissue Simulate Measurement					
Frequency [MHz]	Description	Dielectric Parameters			Liquid Temp. [°C]
		ϵ_r		σ [s/m]	
5800MHz	Reference result ± 5% window	35.3		5.27	N/A
		33.535	to 37.065	5.007 to 5.534	
	2022. 10. 14	34.609		5.495	20.0
	2022. 10. 18	35.808		5.509	20.0
	2022. 12. 06	34.332		5.462	22.0

6.4. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg

6.5. Conducted Power Measurement

Note:

1. Per KDB 447498 D04 the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
Scale Factor = tune-up limit power (mW)/EUT Conducted power (mW), where tune-up limit is the maximum rated power among all production units.
Scale SAR(W/kg)= Measured SAR(W/kg)* Scaling Factor
2. Per KDB 447498 D04 for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
3. Per KDB 248227 D01, for OFDM transmission configuration in the 2.4G and 5G bands. An initial test configuration is determined by the highest maximum output power including tune-up tolerance. When multiple transmission modes(802.11 a/g/n/ac/ax) have same maximum power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected.(i.e. a, g, n, ac then ax)
4. Per KDB 248227 D01, when the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
5. Per KDB 248227 D01, U-NII-1 and U-NII-2A bands have the same specified maximum output and tolerance; SAR is measured for U-NII-2A band first. Adjusted SAR of U-NII-2A band is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.
6. Per KDB 248227 D01, When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested.
7. Pursuant section 2.8.1(2) KDB 865664 D01, when the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
8. Pursuant section 2.8.1(3) KDB 865664 D01, perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit)

6.5.1. For WLAN Function

Type of Network	Channel	Frequency (MHz)	Output Power (dBm)						SAR Test
			ANT AUX			ANT Main			
			Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	
802.11b	CH 1	2412	19.750	20.3	1.135	19.960	20.5	1.132	Yes
	CH 7	2442	19.720	20.3	1.142	19.910	20.5	1.145	Yes
	CH 11	2462	19.870	20.5	---	19.890	20.5	---	No ^{NOTE2}
	CH 12	2467	19.040	20.0	---	18.720	19.3	---	
	CH 13	2472	16.680	17.3	---	15.690	16.3	---	
802.11g	CH 1	2412	16.500	17.3	---	16.610	17.3	---	No ^{NOTE6}
	CH 2	2417	18.440	19.0	---	18.910	19.5	---	
	CH 7	2442	19.200	20.0	---	19.570	20.3	---	
	CH 10	2457	18.300	19.0	---	18.110	19.0	---	
	CH 11	2462	16.340	17.0	---	16.400	17.0	---	
	CH 12	2467	14.230	15.0	---	13.960	14.5	---	
	CH 13	2472	11.350	12.0	---	11.160	12.0	---	

Type of Network	Channel	Frequency (MHz)	Output Power (dBm)						SAR Test
			ANT AUX			ANT Main			
			Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	
802.11n- HT20	CH 1	2412	14.310	15.0	---	14.530	15.3	---	No ^{NOTE4, 3}
	CH 2	2417	16.490	17.0	---	16.710	17.3	---	
	CH 3	2422	17.620	18.3	---	17.820	18.5	---	
	CH 7	2442	19.240	20.0	---	19.620	20.3	---	
	CH 10	2457	17.730	18.3	---	17.810	18.5	---	
	CH 11	2462	14.550	15.3	---	14.690	15.3	---	
	CH 12	2467	10.730	11.3	---	10.610	11.3	---	
	CH 13	2472	5.520	6.3	---	5.510	6.3	---	
802.11n- HT40	CH 3	2422	13.860	14.5	---	14.020	15.0	---	
	CH 7	2442	14.710	15.3	---	15.180	16.0	---	
	CH 9	2452	13.850	14.5	---	14.130	15.0	---	
	CH 10	2457	9.020	10.0	---	9.280	10.0	---	
	CH 11	2462	5.730	6.3	---	5.930	6.5	---	

Type of Network	Channel	Frequency (MHz)	Output Power (dBm)						SAR Test
			ANT AUX			ANT Main			
			Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	
802.11ax-HE20	CH 1	2412	14.460	15.0	---	14.610	15.3	---	No ^{NOTE4, 3}
	CH 2	2417	16.590	17.3	---	16.840	17.5	---	
	CH 3	2422	17.840	18.5	---	17.890	18.5	---	
	CH 7	2442	19.330	20.0	---	19.730	20.3	---	
	CH 10	2457	17.870	18.5	---	17.880	18.5	---	
	CH 11	2462	14.720	15.3	---	14.760	15.3	---	
	CH 12	2467	10.900	11.5	---	10.700	11.3	---	
802.11ax-HE40	CH 13	2472	5.420	6.0	---	5.430	6.0	---	
	CH 3	2422	13.570	14.3	---	13.870	14.5	---	
	CH 7	2442	14.500	15.3	---	14.900	15.5	---	
	CH 9	2452	13.520	14.3	---	13.880	14.5	---	
	CH 10	2457	8.830	9.5	---	9.060	10.0	---	
	CH 11	2462	5.300	6.0	---	5.540	6.3	---	

Type of Network	RU Config	Frequency (MHz)	Output Power (dBm)						SAR Test
			ANT AUX			ANT Main			
			Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	
802.11ax-HE20	26/0	2412	16.390	17.0	---	16.650	17.3	---	No ^{NOTE4, 3}
	52/37		16.370	17.0	---	16.620	17.3	---	
	106/53		12.940	13.5	---	13.320	14.0	---	
	26/8	2472	5.080	6.0	---	5.270	6.0	---	
	52/40		5.990	6.5	---	6.060	7.0	---	
	106/54		6.240	7.0	---	6.210	7.0	---	
802.11ax-HE40	242/61	2422	14.490	15.0	---	14.830	15.5	---	
	242/62	2462	6.230	7.0	---	6.360	7.0	---	

Type of Network	Channel	Frequency (MHz)	Output Power (dBm)						SAR Test	
			ANT AUX			ANT Main				
			Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor		
802.11a	1	CH 36	5180	16.610	17.3	1.172	16.980	17.5	1.127	Yes
		CH 40	5200	16.690	17.3	---	16.790	17.3	---	No ^{NOTE5-3}
		CH 48	5240	16.920	17.5	---	16.740	17.3	---	No ^{NOTE5-3}
	2A	CH 52	5260	16.790	17.3	---	16.910	17.5	---	No ^{NOTE2}
		CH 60	5300	16.710	17.3	---	16.870	17.5	---	No ^{NOTE2}
		CH 64	5320	16.680	17.3	---	16.980	17.5	---	No ^{NOTE2}
	2C	CH 100	5500	17.240	18.0	1.191	16.980	17.5	1.127	Yes
		CH 116	5580	16.940	17.5	---	17.000	18.0	---	No ^{NOTE2-3}
		CH 140	5700	17.210	18.0	---	17.040	18.0	---	No ^{NOTE2-3}
		CH 144	5720	17.170	18.0	---	17.100	18.0	---	No ^{NOTE2-3}
	3	CH 149	5745	17.140	18.0	---	17.000	18.0	---	No ^{NOTE2-3}
		CH 157	5785	17.270	18.0	1.183	16.950	17.5	1.135	Yes
CH 165		5825	17.320	18.0	---	16.810	17.5	---	No ^{NOTE2-3}	

Type of Network	Channel	Frequency (MHz)	Output Power (dBm)						SAR Test	
			ANT AUX			ANT Main				
			Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor		
802.11n-HT20	1	CH 36	5180	16.540	17.3	---	16.500	17.3	---	No ^{NOTE4-3}
		CH 40	5200	16.450	17.0	---	16.520	17.3	---	
		CH 48	5240	16.610	17.3	---	16.670	17.3	---	
	2A	CH 52	5260	16.350	17.0	---	16.650	17.3	---	
		CH 60	5300	15.940	16.5	---	16.480	17.0	---	
		CH 64	5320	16.370	17.0	---	16.510	17.3	---	
	2C	CH 100	5500	16.630	17.3	---	16.610	17.3	---	
		CH 116	5580	16.860	17.5	---	16.600	17.3	---	
		CH 140	5700	16.870	17.5	---	16.660	17.3	---	
		CH 144	5720	16.930	17.5	---	16.670	17.3	---	
	3	CH 149	5745	16.980	17.5	---	16.690	17.3	---	
		CH 157	5785	16.970	17.5	---	16.570	17.3	---	
CH 165		5825	17.010	18.0	---	16.370	17.0	---		

Type of Network	U-NII Band	Channel	Frequency (MHz)	Output Power (dBm)						SAR Test
				ANT AUX			ANT Main			
				Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	
802.11n-HT40	1	CH 38	5190	15.370	16.0	---	15.520	16.3	---	No ^{NOTE4, 3}
		CH 46	5230	16.960	17.5	---	16.920	17.5	---	
	2A	CH 54	5270	16.880	17.5	---	16.950	17.5	---	
		CH 62	5310	15.020	16.0	---	15.270	16.0	---	
	2C	CH 102	5510	17.080	18.0	---	17.010	18.0	---	
		CH 110	5550	17.310	18.0	---	17.160	18.0	---	
		CH 134	5670	17.220	18.0	---	16.930	17.5	---	
	3	CH 142	5710	17.350	18.0	---	17.010	18.0	---	
CH 151		5755	17.390	18.0	---	17.060	18.0	---		
802.11ac-VHT80	1	CH 52	5210	14.010	15.0	---	14.050	15.0	---	No ^{NOTE4, 3}
		CH 58	5290	14.070	15.0	---	14.360	15.0	---	
	2C	CH 106	5530	14.170	15.0	---	14.170	15.0	---	
		CH 133	5610	16.490	17.0	---	16.380	17.0	---	
		CH 138	5690	16.500	17.3	---	16.500	17.3	---	
	3	CH 155	5775	16.850	17.5	---	16.780	17.3	---	
802.11ac-VHT160	1/2A	CH 50	5250	11.290	12.0	---	10.960	11.5	---	No ^{NOTE4, 3}
	2C	CH 114	5570	13.960	14.5	---	14.030	15.0	---	

Type of Network	Channel	Frequency (MHz)	Output Power (dBm)						SAR Test	
			ANT AUX			ANT Main				
			Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor		
802.11ax-HE20	1	CH 36	5180	16.560	17.3	---	16.150	17.0	---	No ^{NOTE4 · 3}
		CH 40	5200	16.610	17.3	---	16.250	17.0	---	
		CH 48	5240	16.770	17.3	---	16.620	17.3	---	
	2A	CH 52	5260	16.570	17.3	---	16.590	17.3	---	
		CH 60	5300	16.540	17.3	---	16.580	17.3	---	
		CH 64	5320	16.510	17.3	---	16.570	17.3	---	
	2C	CH 100	5500	16.780	17.3	---	16.700	17.3	---	
		CH 116	5580	17.030	18.0	---	16.690	17.3	---	
		CH 140	5700	16.990	17.5	---	16.650	17.3	---	
		CH 144	5720	16.950	17.5	---	16.790	17.3	---	
	3	CH 149	5745	17.070	18.0	---	16.720	17.3	---	
		CH 157	5785	17.110	18.0	---	16.730	17.3	---	
CH 165		5825	17.170	18.0	---	16.450	17.0	---		
802.11ax-HE40	1	CH 38	5190	15.050	16.0	---	15.160	16.0	---	No ^{NOTE4 · 3}
		CH 46	5230	16.730	17.3	---	16.670	17.3	---	
	2A	CH 54	5270	16.650	17.3	---	16.690	17.3	---	
		CH 62	5310	14.730	15.3	---	15.020	16.0	---	
	2C	CH 102	5510	16.890	17.5	---	16.730	17.3	---	
		CH 110	5550	17.090	18.0	---	16.810	17.5	---	
		CH 134	5670	16.970	17.5	---	16.650	17.3	---	
	3	CH 142	5710	17.120	18.0	---	16.830	17.5	---	
CH 151		5755	17.110	18.0	---	16.780	17.3	---		
802.11ax-HE80	1	CH 52	5210	13.730	14.3	---	13.740	14.3	---	No ^{NOTE4 · 3}
	2A	CH 58	5290	13.900	14.5	---	14.090	15.0	---	
	2C	CH 106	5530	13.900	14.5	---	13.880	14.5	---	
		CH 133	5610	16.240	17.0	---	16.160	17.0	---	
	3	CH 138	5690	16.270	17.0	---	16.230	17.0	---	
		CH 155	5775	16.540	17.3	---	16.580	17.3	---	
802.11ax-HE160	1/2A	CH 50	5250	11.100	12.0	---	10.760	11.3	---	No ^{NOTE4 · 3}
	2C	CH 114	5570	13.740	14.3	---	13.830	14.5	---	

Type of Network	Channel	Frequency (MHz)	RU Config	Output Power (dBm)						SAR Test	
				ANT AUX			ANT Main				
				Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor		
802.11ax-HE20	1	CH 36	5180	26/0	9.560	10.3	---	9.760	10.3	---	No ^{NOTE} 4.3
				52/37	13.220	14.0	---	13.210	14.0	---	
				106/53	15.860	16.5	---	15.660	16.3	---	
	2A	CH 64	5320	26/8	9.520	10.3	---	9.570	10.3	---	
				52/40	13.130	14.0	---	13.020	14.0	---	
				106/54	15.620	16.3	---	15.610	16.3	---	
	2C	CH 100	5500	26/0	9.960	10.5	---	9.770	10.3	---	
				52/37	13.350	14.0	---	13.270	14.0	---	
				106/53	15.240	16.0	---	15.190	16.0	---	
		CH 140	5700	26/8	9.480	10.0	---	9.550	10.3	---	
				52/40	13.140	14.0	---	13.090	14.0	---	
				106/54	16.180	17.0	---	15.970	16.5	---	
	3	CH 149	5745	26/0	15.820	16.5	---	15.550	16.3	---	
				52/37	13.090	14.0	---	13.040	14.0	---	
		CH 165	5825	26/8	15.940	16.5	---	15.370	16.0	---	
52/40				13.370	14.0	---	13.000	14.0	---		
106/54	17.460	18.0	---	16.950	17.5	---					
802.11ax-HE40	1	CH 38	5190	242/61	16.160	17.0	---	16.170	17.0	---	No ^{NOTE} 4.3
	2A	CH 62	5310	242/62	15.770	16.3	---	15.970	16.5	---	
	2C	CH 102	5510	242/61	16.830	17.5	---	16.910	17.5	---	
		CH 142	5710	242/62	17.350	18.0	---	17.360	18.0	---	
	3	CH 151	5755	242/61	17.030	18.0	---	16.950	17.5	---	
		CH 159	5795	242/62	17.580	18.3	---	17.220	18.0	---	
802.11ax-HE80	1	CH 52	5210	484/65	14.120	15.0	---	14.220	15.0	---	No ^{NOTE} 4.3
	2A	CH 58	5290	484/66	12.010	13.0	---	11.960	12.5	---	
	2C	CH 106	5530	484/65	15.120	16.0	---	15.290	16.0	---	
		CH 133	5610	484/66	17.150	18.0	---	17.020	18.0	---	
	3	CH 155	5775	484/65	17.140	18.0	---	17.090	18.0	---	
				484/66	17.110	18.0	---	16.960	17.5	---	
802.11ax-HE160	2A	CH 50	5250	996/67	13.810	14.5	---	14.010	15.0	---	No ^{NOTE} 4.3
				996/S67	12.190	13.0	---	12.410	13.0	---	
	2C	CH 114	5570	996/67	14.060	15.0	---	14.160	15.0	---	
				996/S67	17.600	18.3	---	17.550	18.3	---	

6.5.2. For BT Function

Type of Network	Channel	Frequency (MHz)	Max Output Power (dBm)	Tune-Up Limit	Scale Factor	SAR Test
Bluetooth-GFSK	CH 0	2402	8.96	9.5	---	No
	CH 39	2441	9.24	10.0	---	No
	CH 78	2480	9.66	10.3	1.158	Yes
Bluetooth-8-DPSK	CH 0	2402	7.49	8.0	---	No
	CH 39	2441	7.76	8.3	---	No
	CH 78	2480	7.87	8.5	---	No
BLE (1Mbps)	CH 37	2402	5.850	6.5	---	No
	CH 17	2440	6.140	7.0	---	No
	CH 39	2480	6.100	7.0	---	No
BLE (2Mbps)	CH 37	2402	5.860	6.5	---	No
	CH 17	2440	6.160	7.0	---	No
	CH 39	2480	6.110	7.0	---	No
BLE (PHY Coded S2)	CH 37	2402	5.850	6.5	---	No
	CH 17	2440	6.140	7.0	---	No
	CH 39	2480	6.080	7.0	---	No
BLE (PHY Coded S8)	CH 37	2402	5.840	6.5	---	No
	CH 17	2440	6.140	7.0	---	No
	CH 39	2480	6.090	7.0	---	No

6.6. SAR Test Result

6.6.1. WiFi 2.4G/Bluetooth

Test Date	2022. 10. 16 ~ 11. 23	Temp./Hum.	23°C/46 ~ 62%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #1 (with INPAQ Antenna)		

Liquid Temperature : 21.0°C/22.0°C							Depth of Liquid: > 15cm			
Test Mode: 2.4GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
802.11b										
Antenna: ANT 1-AUX										
1	Screen	Fixed	0.5	2442	19.72	20.30	0.911	1.142	1.040	1.60
3	Bottom	Fixed	0	2442	19.72	20.30	0.194	1.142	0.222	1.60
17	Screen	Fixed	0.5	2412	19.75	20.30	0.843	1.135	0.957	1.60
Antenna: ANT 2-Main										
2	Screen	Fixed	0.5	2442	19.91	20.50	0.754	1.145	0.863	1.60
4	Bottom	Fixed	0	2442	19.91	20.50	0.206	1.145	0.236	1.60
18	Screen	Fixed	0.5	2412	19.96	20.50	0.740	1.132	0.838	1.60

Liquid Temperature : 21.0°C							Depth of Liquid: > 15cm			
Test Mode: BT-GFSK										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
Antenna: ANT 1-AUX										
15	Screen	Fixed	0.5	2480	9.66	10.30	0.0569	1.158	0.066	1.60
16	Bottom	Fixed	0	2480	9.66	10.30	0.0009	1.158	0.001	1.60

Test Date	2022. 12. 05	Temp./Hum.	21°C/54%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

Liquid Temperature : 21.0°C							Depth of Liquid: > 15cm			
Test Mode: 2.4GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
802.11b										
Antenna: ANT 1-AUX										
1	Screen	Fixed	0.5	2442	19.72	20.30	0.823	1.142	0.940	1.60
3	Bottom	Fixed	0	2442	19.72	20.30	0.181	1.142	0.207	1.60
17	Screen	Fixed	0.5	2412	19.75	20.30	0.797	1.135	0.905	1.60
Antenna: ANT 2-Main										
2	Screen	Fixed	0.5	2442	19.91	20.50	0.732	1.145	0.838	1.60
4	Bottom	Fixed	0	2442	19.91	20.50	0.213	1.145	0.244	1.60
18	Screen	Fixed	0.5	2412	19.96	20.50	0.746	1.132	0.844	1.60

Liquid Temperature : 21.0°C							Depth of Liquid: > 15cm			
Test Mode: BT-GFSK										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
Antenna: ANT 1-AUX										
15	Screen	Fixed	0.5	2480	9.66	10.30	0.0288	1.158	0.033	1.60
16	Bottom	Fixed	0	2480	9.66	10.30	0.0000467	1.158	0.0001	1.60

6.6.2. WiFi 5G

Test Date	2022. 10. 14	Temp./Hum.	21°C/49%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #1 (with INPAQ Antenna)		

Liquid Temperature : 20.0°C						Depth of Liquid: > 15cm				
Test Mode: 5GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
802.11a (UNII Band 2A)										
Antenna: ANT 1-AUX										
5	Screen	Fixed	0.5	5180	16.61	17.30	0.681	1.172	0.798	1.60
11	Bottom	Fixed	0	5180	16.61	17.30	0.152	1.172	0.178	1.60
Antenna: ANT 2-Main										
6	Screen	Fixed	0.5	5180	16.98	17.50	0.304	1.127	0.343	1.60
12	Bottom	Fixed	0	5180	16.98	17.50	0.0461	1.127	0.052	1.60
802.11a (UNII Band 2C)										
Antenna: ANT 1-AUX										
7	Screen	Fixed	0.5	5500	17.24	18.00	0.397	1.191	0.473	1.60
Antenna: ANT 2-Main										
8	Screen	Fixed	0.5	5500	16.98	17.50	0.440	1.127	0.496	1.60
802.11a (UNII Band 3)										
Antenna: ANT 1-AUX										
9	Screen	Fixed	0.5	5785	17.27	18.00	0.312	1.183	0.369	1.60
Antenna: ANT 2-Main										
10	Screen	Fixed	0.5	5785	16.95	18.00	0.485	1.135	0.550	1.60

Test Date	2022. 12. 06	Temp./Hum.	23°C/55%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

Liquid Temperature : 22.0°C						Depth of Liquid: > 15cm				
Test Mode: 5GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
802.11a (UNII Band 2A)										
Antenna: ANT 1-AUX										
5	Screen	Fixed	0.5	5180	16.61	17.30	0.657	1.172	0.770	1.60
Antenna: ANT 2-Main										
6	Screen	Fixed	0.5	5180	16.98	17.50	0.695	1.127	0.783	1.60
802.11a (UNII Band 2C)										
Antenna: ANT 1-AUX										
7	Screen	Fixed	0.5	5500	17.24	18.00	0.707	1.191	0.842	1.60
11	Bottom	Fixed	0	5500	17.24	18.00	0.173	1.191	0.206	1.60
Antenna: ANT 2-Main										
8	Screen	Fixed	0.5	5500	16.98	17.50	0.469	1.127	0.529	1.60
12	Bottom	Fixed	0	5500	16.98	17.50	0.136	1.127	0.153	1.60
802.11a (UNII Band 3)										
Antenna: ANT 1-AUX										
9	Screen	Fixed	0.5	5785	17.27	18.00	0.640	1.183	0.757	1.60
Antenna: ANT 2-Main										
10	Screen	Fixed	0.5	5785	16.95	18.00	0.371	1.135	0.421	1.60

Worst Case For SAR measurement

Test Date	2022. 10. 16	Temp./Hum.	23°C/46%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #2 (with INPAQ Antenna)		

Liquid Temperature : 21.0°C							Depth of Liquid: > 15cm			
Test Mode: 2.4GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
802.11b										
Antenna: ANT 1-AUX										
1	Screen	Fixed	0.5	2442	19.72	20.30	0.861	1.142	0.983	1.60
Antenna: ANT 2-Main										
2	Screen	Fixed	0.5	2442	19.91	20.50	0.742	1.145	0.850	1.60

Test Date	2022. 10. 14	Temp./Hum.	21°C/49%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #2 (with INPAQ Antenna)		

Liquid Temperature : 20.0°C							Depth of Liquid: > 15cm			
Test Mode: 5GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
802.11a (UNII Band 2A)										
Antenna: ANT 1-AUX										
5	Screen	Fixed	0.5	5180	16.61	17.30	0.632	1.172	0.741	1.60
Antenna: ANT 2-Main										
6	Screen	Fixed	0.5	5180	16.98	17.50	0.280	1.127	0.316	1.60

Test Date	2022. 10. 19	Temp./Hum.	23°C/69%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

Liquid Temperature : 21.0°C							Depth of Liquid: > 15cm			
Test Mode: 2.4GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
802.11b										
Antenna: ANT 1-AUX										
1	Screen	Fixed	0.5	2442	19.72	20.30	0.804	1.142	0.918	1.60
Antenna: ANT 2-Main										
2	Screen	Fixed	0.5	2442	19.91	20.50	0.769	1.145	0.881	1.60

Test Date	2022. 10. 18	Temp./Hum.	22°C/47%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

Liquid Temperature : 20.0°C							Depth of Liquid: > 15cm			
Test Mode: 5GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Limit (W/kg)
802.11a (UNII Band 2C)										
Antenna: ANT 1-AUX										
7	Screen	Fixed	0.5	5500	17.24	18.00	0.738	1.191	0.879	1.60
Antenna: ANT 2-Main										
8	Screen	Fixed	0.5	5500	16.98	17.50	0.435	1.127	0.490	1.60

Repeated SAR measurement

Test Date	2022. 10. 16 ~ 11. 23	Temp./Hum.	23°C/46 ~ 62%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #1 (with INPAQ Antenna)		

2.4GHz							
Plot No		Frequency (MHz)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Variation	Additional repeat SAR required
1	original	2442	0.911	1.142	1.040	--	Yes ^{Note 1}
1	first repeat	2442	0.870	1.142	0.994	0.95	No ^{Note 2}
17	original	2412	0.843	1.135	0.957	--	Yes ^{Note 1}
17	first repeat	2412	0.836	1.135	0.949	0.99	No ^{Note 2}

Test Date	2022. 12. 05	Temp./Hum.	21°C/54%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

2.4GHz							
Plot No		Frequency (MHz)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Variation	Additional repeat SAR required
1	original	2442	0.823	1.142	0.940	--	Yes ^{Note 1}
1	first repeat	2442	0.811	1.142	0.926	0.99	No ^{Note 2}

Note: 1. Pursuant section 2.8.1(2) KDB 865664 D01, when the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

2. Pursuant section 2.8.1(3) KDB 865664 D01, perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit)

Test Date	2022. 10. 16	Temp./Hum.	23°C/46%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #2 (with INPAQ Antenna)		

2.4GHz							
Plot No		Frequency (MHz)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Variation	Additional repeat SAR required
1	original	2442	0.861	1.142	0.983	--	Yes ^{Note 1}
101	first repeat	2442	0.870	1.142	0.994	1.01	No ^{Note 2}

Test Date	2022. 10. 19	Temp./Hum.	23°C/62%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

2.4GHz							
Plot No		Frequency (MHz)	SAR 1g (W/kg)	Scale Factor	Reported SAR	Variation	Additional repeat SAR required
1	original	2442	0.804	1.142	0.918	--	Yes ^{Note 1}
101	first repeat	2442	0.819	1.142	0.935	1.02	No ^{Note 2}

Note: 1. Pursuant section 2.8.1(2) KDB 865664 D01, when the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

2. Pursuant section 2.8.1(3) KDB 865664 D01, perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit)

6.6.3. Highest Simultaneous Transmission SAR

Test SKU: SKU #1 (with INPAQ Antenna)

Highest Simultaneous Transmission SAR	Reported Body SAR _{1g}
WLAN 2.4G (2442MHz) ANT Main+ WLAN 2.4G (2442MHz) ANT AUX	1.903 (W/kg) ^{NOTE 3}
WLAN 2.4G (2442MHz) ANT AUX+ BT (2480MHz) ANT AUX	1.106 (W/kg)
WLAN 5G (5180MHz) ANT AUX+ BT (2480MHz)ANT AUX	0.864 (W/kg)
WLAN 5G (5180MHz) ANT Main+ WLAN 5 (5180MHz) ANT AUX	1.141 (W/kg)
WLAN 5G (5180MHz) ANT Main+ WLAN 5 (5180MHz) ANT AUX + BT (2480MHz)ANT AUX	1.207 (W/kg)
<p>Note: 1. The SAR limit (SAR_{1g} 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).</p> <p>2. It is calculated from scale SAR.</p> <p>3. It is larger than the limit 1.6(W/kg), SAR test exclusion is determined by the SAR to peak location separation ratio.</p>	

Test SKU: SKU #1 (with LUXSHARE-ICT Antenna)

Highest Simultaneous Transmission SAR	Reported Body SAR _{1g}
WLAN 2.4G (2442MHz) ANT Main+ WLAN 2.4G (2442MHz) ANT AUX	1.778 (W/kg) ^{NOTE 3}
WLAN 2.4G (2442MHz) ANT AUX+ BT (2480MHz) ANT AUX	0.973 (W/kg)
WLAN 5G (5500MHz) ANT AUX+ BT (2480MHz)ANT AUX	0.875 (W/kg)
WLAN 5G (5180MHz) ANT Main+ WLAN 5 (5180MHz) ANT AUX	1.553 (W/kg)
WLAN 5G (5180MHz) ANT Main+ WLAN 5 (5180MHz) ANT AUX + BT (2480MHz)ANT AUX	1.586 (W/kg)
<p>Note: 1. The SAR limit (SAR_{1g} 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).</p> <p>2. It is calculated from scale SAR.</p> <p>3. It is larger than the limit 1.6(W/kg), SAR test exclusion is determined by the SAR to peak location separation ratio.</p>	

Test SKU: SKU #1 (with INPAQ Antenna)

Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR ₁ +SAR ₂) ^{Note2}	Ri (mm) ^{Note2}	SPLSR ^{Note2}
WLAN 2.4G ANT Main+ WLAN 2.4G ANT AUX	2442MHz	1.903 (W/kg) ^{Note 2}	68.43	0.04
WLAN 2.4G ANT Main+ WLAN 2.4G ANT AUX	2412MHz	1.795 (W/kg) ^{Note 2}	68.43	0.04

Note: 1. The SAR limit (SAR_{1g} 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).

2. $SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$ must ≤ 0.04

Find distance of maxima

Maxima and position w.r.t. Grid Reference Point		associated 1g averages
Zoom Scan (D:\SAR Test Data\2022 10\2.16Z90R\INPAQ\FCC\DASY\2.4G\P1 802.11b CH7 2442MHz Screen ...)		
Max. 1 at (114.60, -52.60, 0.34) mm		1.04 W/kg (Power Scale Factor: 1.142)
Zoom Scan (D:\SAR Test Data\2022 10\2.16Z90R\INPAQ\FCC\DASY\2.4G\P2 802.11b CH7 2442MHz Screen ...)		
Max. 2 at (116.60, 15.80, 0.24) mm		0.86 W/kg (Power Scale Factor: 1.145)
Distances and Separation Ratios		
Max. 1 - Max. 2		Distance [mm]: 68.43 / Separation ratio [W/kg/mm]: 0.04

Done

Find distance of maxima

Maxima and position w.r.t. Grid Reference Point		associated 1g averages
Zoom Scan (D:\SAR Test Data\2022 10\2.16Z90R\INPAQ\FCC\DASY\2.4G\P17 802.11b CH1 2412MHz Screen...)		
Max. 1 at (114.60, -52.60, 0.34) mm		1.01 W/kg (Power Scale Factor: 1.135)
Zoom Scan (D:\SAR Test Data\2022 10\2.16Z90R\INPAQ\FCC\DASY\2.4G\P18 802.11b CH1 2412MHz Screen...)		
Max. 2 at (116.60, 15.80, 0.24) mm		0.84 W/kg (Power Scale Factor: 1.132)
Distances and Separation Ratios		
Max. 1 - Max. 2		Distance [mm]: 68.43 / Separation ratio [W/kg/mm]: 0.04

Done

Test SKU: SKU #1 (with LUXSHARE-ICT Antenna)

Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR1+SAR2) ^{Note2}	Ri (mm) ^{Note2}	SPLSR ^{Note2}
WLAN 2.4G ANT Main+ WLAN 2.4G ANT AUX	2442MHz	1.778 (W/kg) ^{Note 2}	68.89	0.03
WLAN 2.4G ANT Main+ WLAN 2.4G ANT AUX	2412MHz	1.743 (W/kg) ^{Note 2}	68.89	0.03

Note: 1. The SAR limit (SAR_{1g} 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).

2. $SPLSR = (SAR1 + SAR2)^{1.5} / Ri$ must ≤ 0.04

Find distance of maxima

Maxima and position w.r.t. Grid Reference Point | associated 1g averages

- Zoom Scan (D:\SAR Test Data\2022 12\2.16Z90R\2.4G\DASY\P1-2 802.11b CH7 2442MHz Screen Aux.da53:...**
 Max. 1 at (121.80, -55.40, 0.60) mm | 0.94 W/kg (Power Scale Factor: 1.142)
- Zoom Scan (D:\SAR Test Data\2022 12\2.16Z90R\2.4G\DASY\P2-2 802.11b CH7 2442MHz Screen Main.da53:...**
 Max. 2 at (125.40, 13.40, 0.50) mm | 0.84 W/kg (Power Scale Factor: 1.145)

Distances and Separation Ratios

Max. 1 - Max. 2 | Distance [mm]: 68.89 / Separation ratio [W/kg/mm]: 0.03

Done

Find distance of maxima

Maxima and position w.r.t. Grid Reference Point | associated 1g averages

- Zoom Scan (D:\SAR Test Data\2022 12\2.16Z90R\2.4G\DASY\P1-2 802.11b CH7 2442MHz Screen Aux.da53:...**
 Max. 1 at (121.80, -55.40, 0.60) mm | 0.90 W/kg (Power Scale Factor: 1.135)
- Zoom Scan (D:\SAR Test Data\2022 12\2.16Z90R\2.4G\DASY\P2-2 802.11b CH7 2442MHz Screen Main.da53:...**
 Max. 2 at (125.40, 13.40, 0.50) mm | 0.84 W/kg (Power Scale Factor: 1.132)

Distances and Separation Ratios

Max. 1 - Max. 2 | Distance [mm]: 68.89 / Separation ratio [W/kg/mm]: 0.03

Done

Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)

Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR ₁ +SAR ₂) ^{Note2}	Ri (mm) ^{Note2}	SPLSR ^{Note2}
WLAN 2.4G ANT Main+ WLAN 2.4G ANT AUX	2442MHz	1.799 (W/kg) ^{Note 2}	68.89	0.04
WLAN 2.4G ANT Main+ WLAN 2.4G ANT AUX	2412MHz	1.748 (W/kg) ^{Note 2}	68.89	0.03

Note: 1. The SAR limit (SAR_{1g} 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).

2. $SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$ must ≤ 0.04

Find distance of maxima

Maxima and position w.r.t. Grid Reference Point	associated 1g averages
<input type="checkbox"/> Zoom Scan (D:\SAR Test Data\2022 10\2.16Z90R\Luxshare\FCC\DASY\2.4G\P1-2 802.11b CH7 2442MHz Scr... Max. 1 at (121.80, -55.40, 0.60) mm	0.92 W/kg (Power Scale Factor: 1.142)
<input type="checkbox"/> Zoom Scan (D:\SAR Test Data\2022 10\2.16Z90R\Luxshare\FCC\DASY\2.4G\P2-2 802.11b CH7 2442MHz Scr... Max. 2 at (125.40, 13.40, 0.50) mm	0.88 W/kg (Power Scale Factor: 1.145)
Distances and Separation Ratios	
Max. 1 - Max. 2	Distance [mm]: 68.89 / Separation ratio [W/kg/mm]: 0.04

Done

Find distance of maxima

Maxima and position w.r.t. Grid Reference Point	associated 1g averages
<input type="checkbox"/> Zoom Scan (D:\SAR Test Data\2022 10\2.16Z90R\Luxshare\FCC\DASY\2.4G\P17 802.11b CH1 2412MHz Scre... Max. 1 at (121.80, -55.40, 0.60) mm	0.89 W/kg (Power Scale Factor: 1.135)
<input type="checkbox"/> Zoom Scan (D:\SAR Test Data\2022 10\2.16Z90R\Luxshare\FCC\DASY\2.4G\P18 802.11b CH1 2412MHz Scre... Max. 2 at (125.40, 13.40, 0.50) mm	0.85 W/kg (Power Scale Factor: 1.132)
Distances and Separation Ratios	
Max. 1 - Max. 2	Distance [mm]: 68.89 / Separation ratio [W/kg/mm]: 0.03

Done



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

GRAPH RESULT

(Model: 16Z90R)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX B

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX B

TEST PHOTOGRAPHS

(Model: 16Z90R)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX C

Test Equipment Calibration Data