



Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

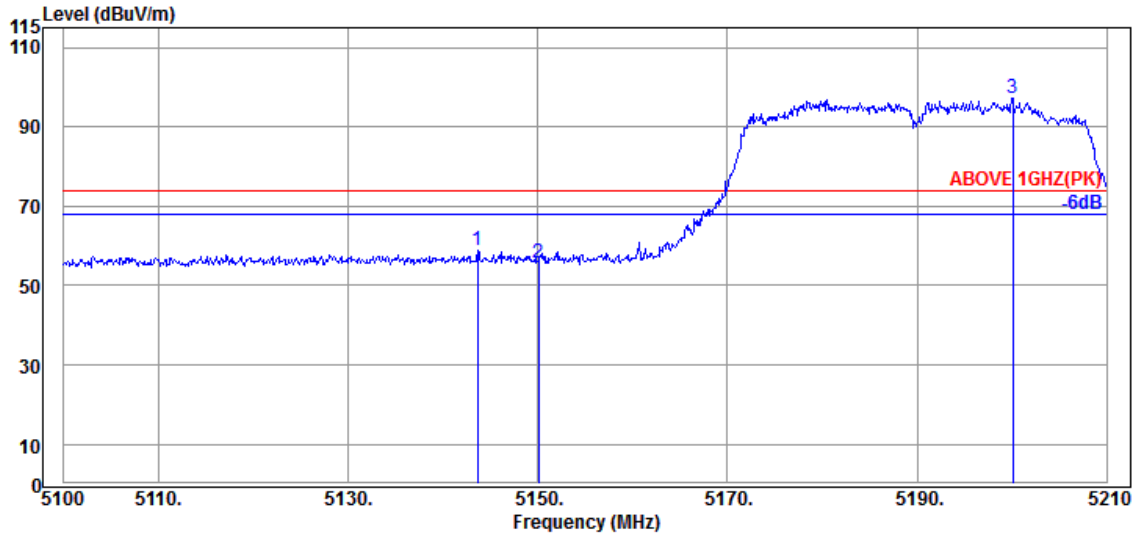

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.670	34.50	8.88	34.34	49.66	58.70	74.00	15.30	Peak
5150.050	34.50	8.88	34.34	46.82	55.86	74.00	18.14	Peak
@ 5200.100	34.70	8.91	34.32	87.99	97.28	---	---	Peak

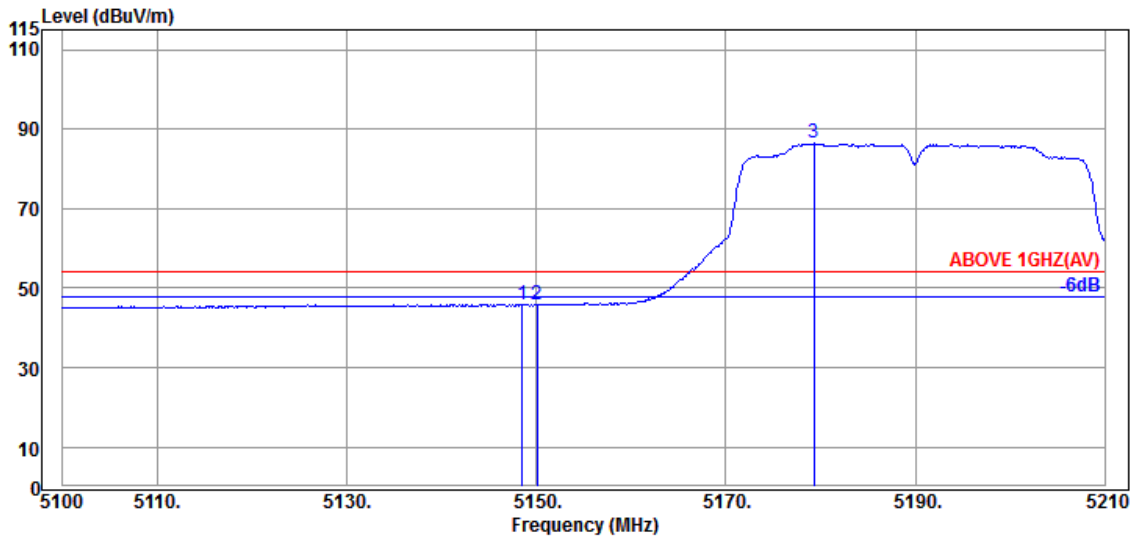


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	34.50	8.88	34.34	36.91	45.95	54.00	8.05	Average
5150.050	34.50	8.88	34.34	36.75	45.79	54.00	8.21	Average
@ 5179.310	34.63	8.90	34.32	77.16	86.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

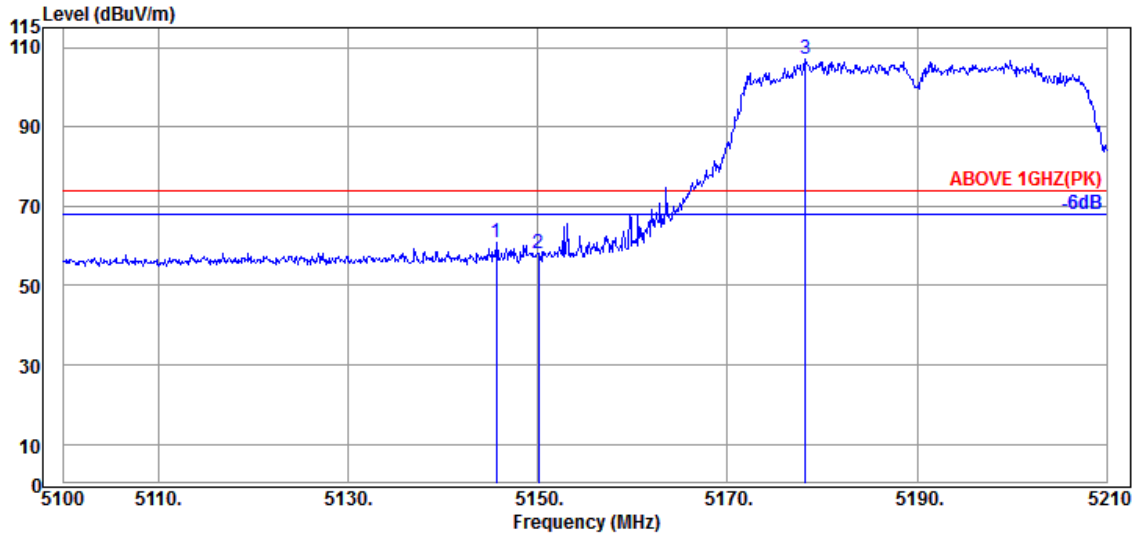

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.650	34.50	8.88	34.34	51.93	60.97	74.00	13.03	Peak
5150.050	34.50	8.88	34.34	49.02	58.06	74.00	15.94	Peak
@ 5178.210	34.63	8.90	34.32	97.80	107.01	---	---	Peak

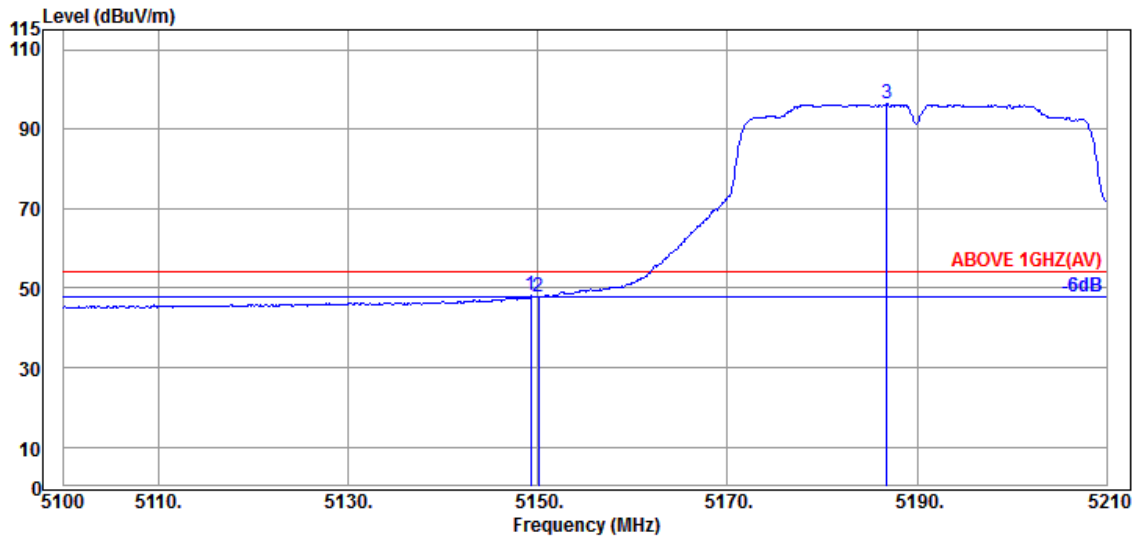


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.50	8.88	34.34	39.02	48.06	54.00	5.94	Average
5150.050	34.50	8.88	34.34	38.81	47.85	54.00	6.15	Average
@ 5186.790	34.70	8.91	34.32	87.01	96.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

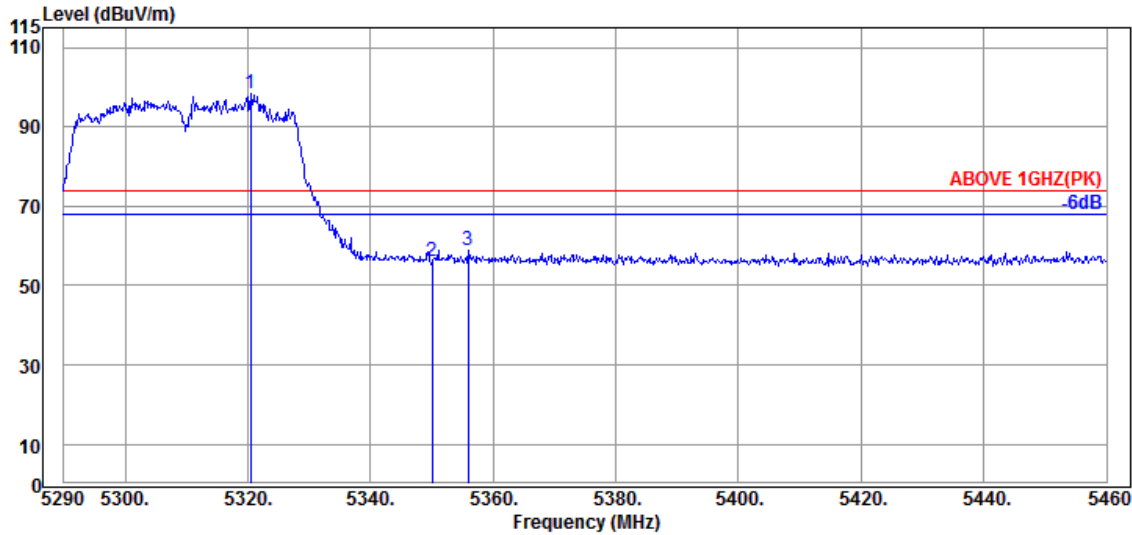

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5320.430	34.57	8.98	34.27	89.08	98.36	---	---	Peak
5350.010	34.90	8.99	34.26	46.53	56.16	74.00	17.84	Peak
5355.960	34.87	9.00	34.26	49.27	58.88	74.00	15.12	Peak

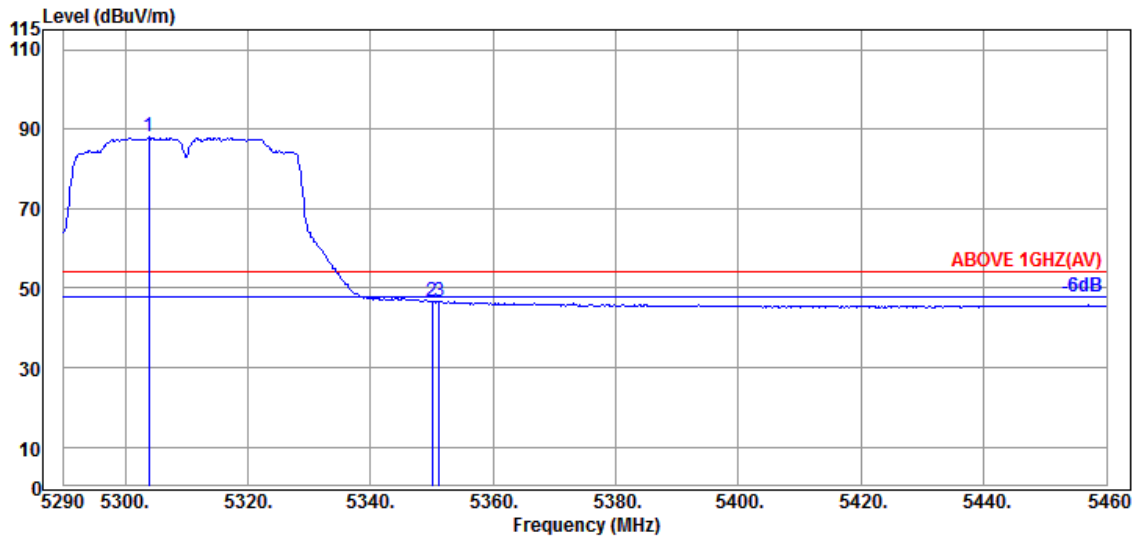


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5303.940	34.40	8.97	34.28	78.88	87.97	---	---	Average
5350.010	34.90	8.99	34.26	36.81	46.44	54.00	7.56	Average
5351.200	34.90	8.99	34.26	37.13	46.76	54.00	7.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

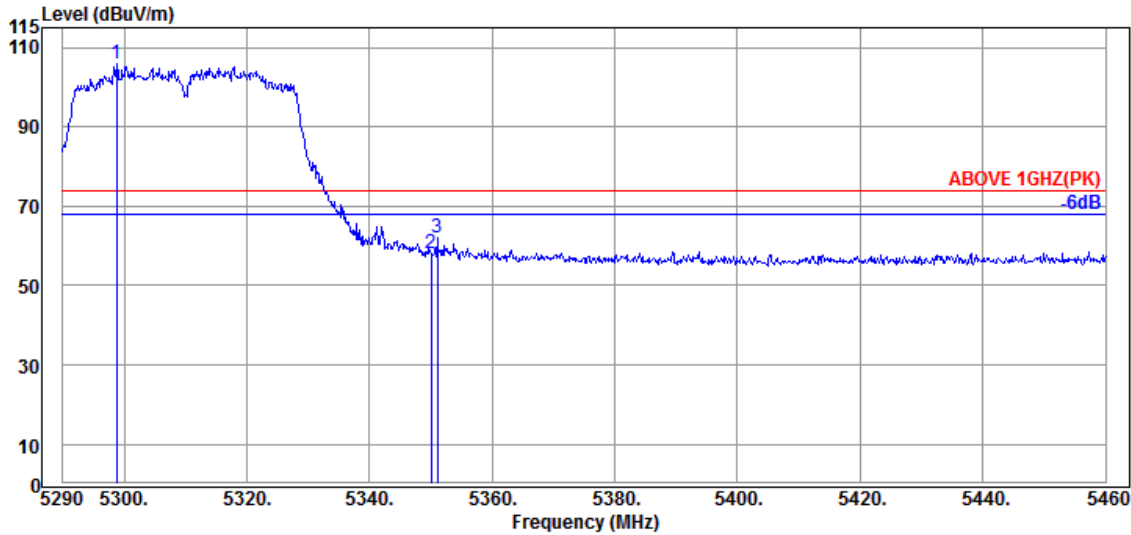

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.840	34.40	8.97	34.28	96.74	105.83	---	---	Peak
5350.010	34.90	8.99	34.26	48.55	58.18	74.00	15.82	Peak
5351.030	34.90	8.99	34.26	52.43	62.06	74.00	11.94	Peak

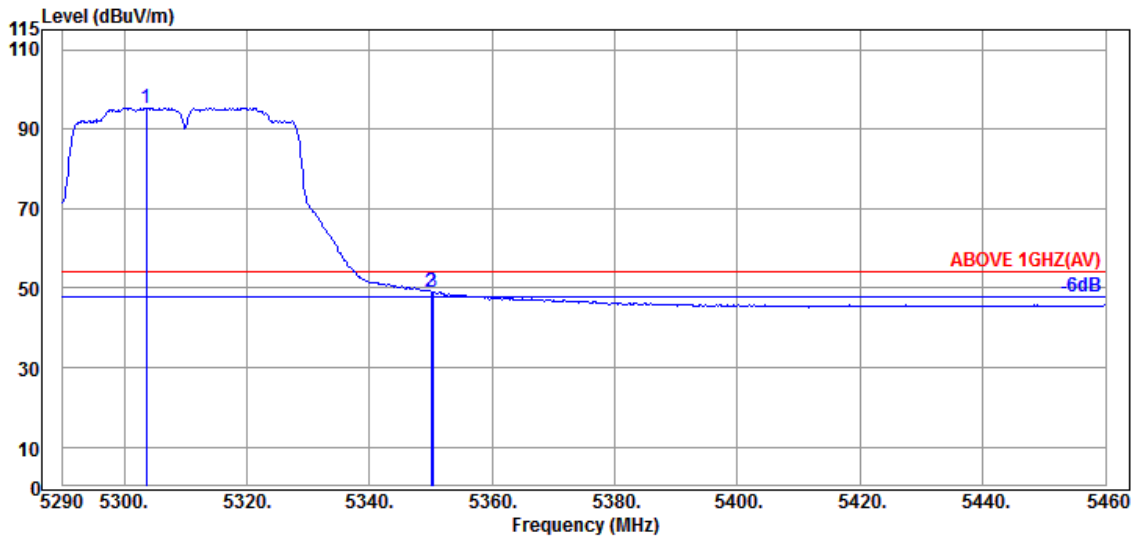


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.600	34.40	8.97	34.28	86.35	95.44	---	---	Average
5350.010	34.90	8.99	34.26	39.47	49.10	54.00	4.90	Average
5350.350	34.90	8.99	34.26	39.54	49.17	54.00	4.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

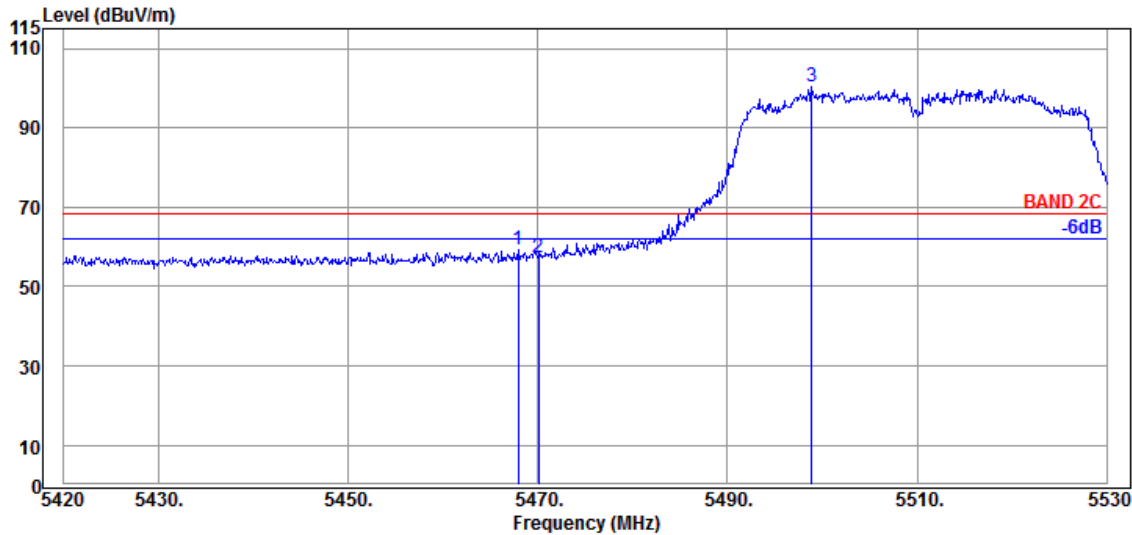

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.960	34.63	9.06	34.21	49.91	59.39	68.20	8.81	Peak
5470.050	34.63	9.06	34.21	47.66	57.14	68.20	11.06	Peak
@ 5498.870	34.70	9.08	34.20	90.86	100.44	---	---	Peak

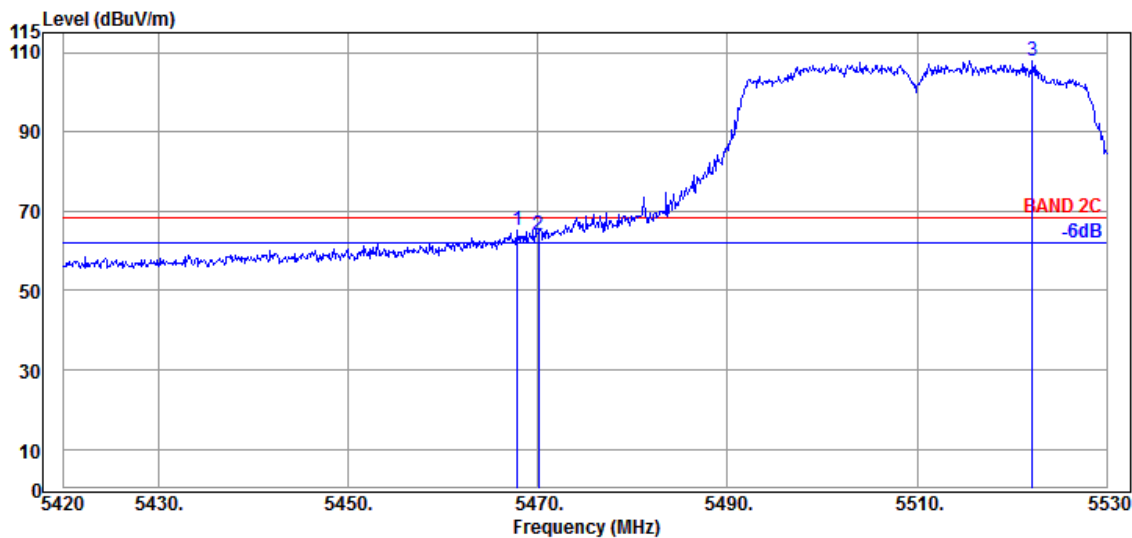


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.63	9.06	34.21	55.69	65.17	68.20	3.03	Peak
5470.050	34.63	9.06	34.21	54.58	64.06	68.20	4.14	Peak
@ 5522.190	34.70	9.09	34.21	98.15	107.73	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

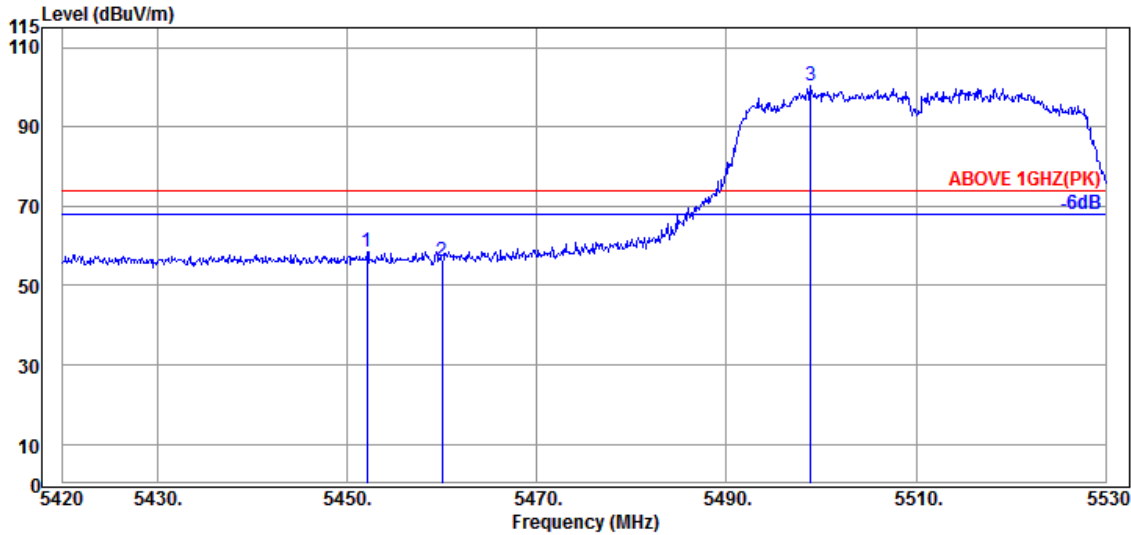

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.120	34.60	9.05	34.21	49.07	58.51	74.00	15.49	Peak
5460.040	34.60	9.05	34.21	46.84	56.28	74.00	17.72	Peak
@ 5498.870	34.70	9.08	34.20	90.86	100.44	---	---	Peak

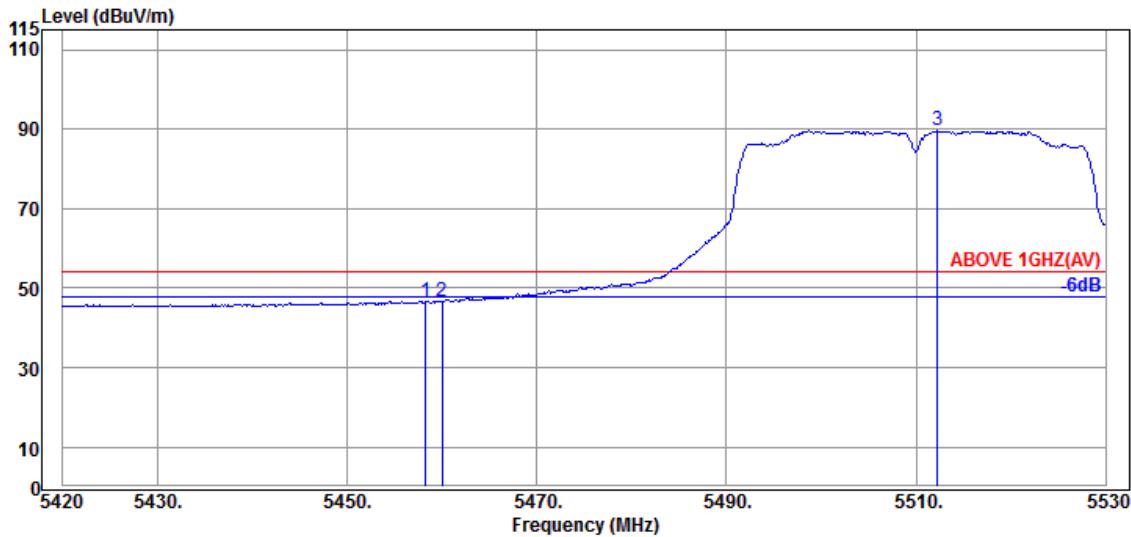


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.280	34.60	9.05	34.21	37.38	46.82	54.00	7.18	Average
5460.040	34.60	9.05	34.21	37.36	46.80	54.00	7.20	Average
@ 5512.290	34.70	9.09	34.21	80.05	89.63	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

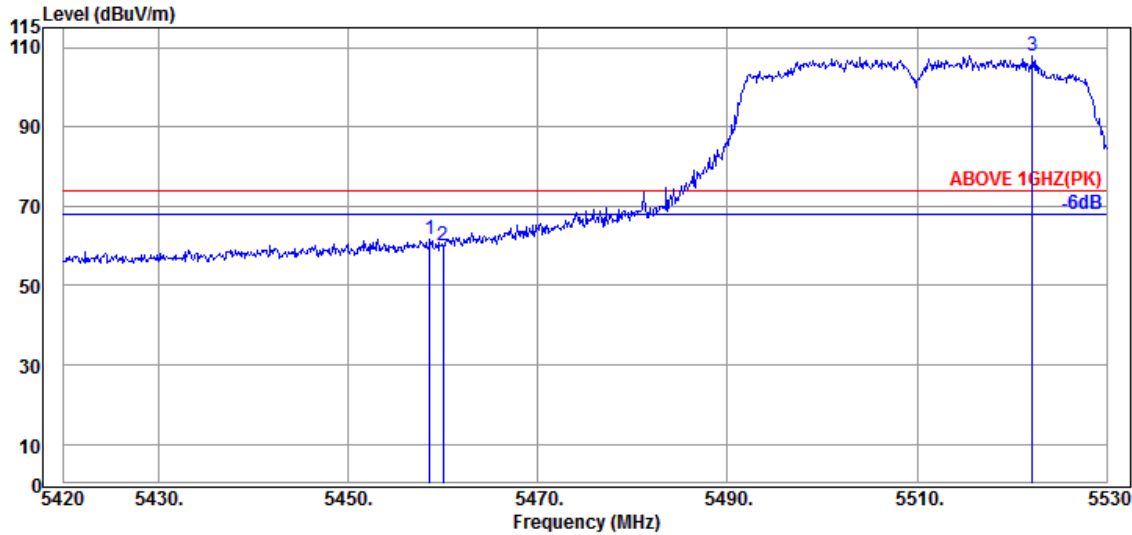

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.610	34.60	9.05	34.21	52.20	61.64	74.00	12.36	Peak
5460.040	34.60	9.05	34.21	50.43	59.87	74.00	14.13	Peak
@ 5522.190	34.70	9.09	34.21	98.15	107.73	---	---	Peak

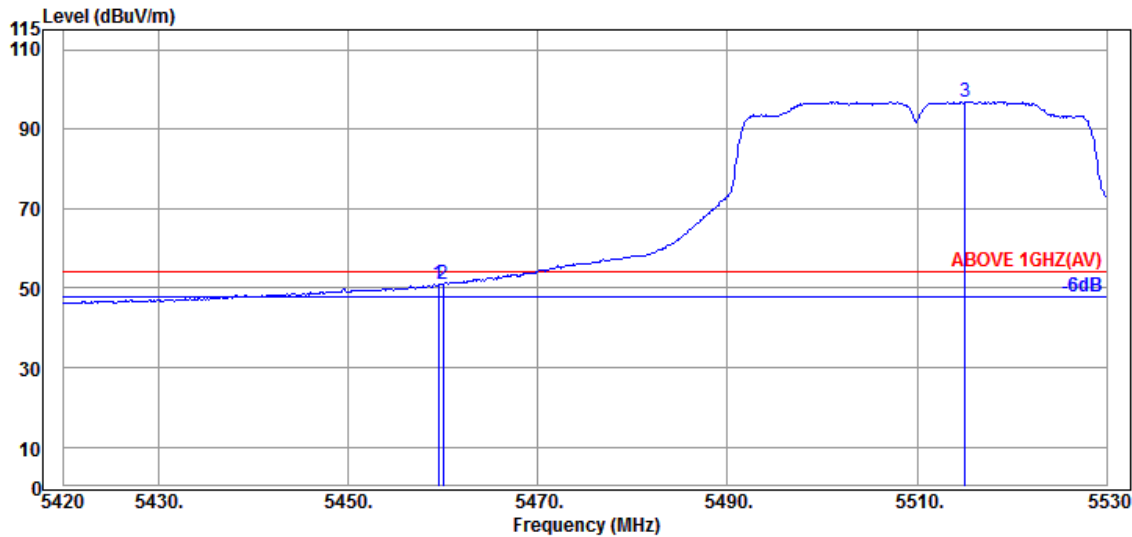


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.490	34.60	9.05	34.21	41.42	50.86	54.00	3.14	Average
5460.040	34.60	9.05	34.21	41.69	51.13	54.00	2.87	Average
@ 5515.040	34.70	9.09	34.21	87.38	96.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

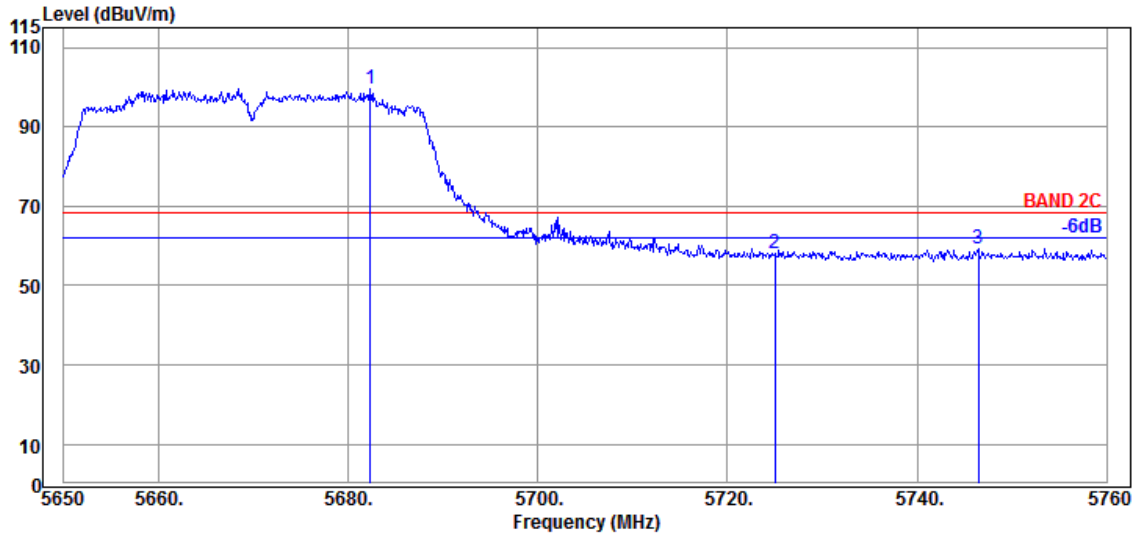

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.340	34.63	9.17	34.29	90.08	99.59	---	---	Peak
5725.020	34.90	9.20	34.30	48.42	58.22	68.20	9.98	Peak
5746.470	35.00	9.20	34.32	49.42	59.30	68.20	8.90	Peak

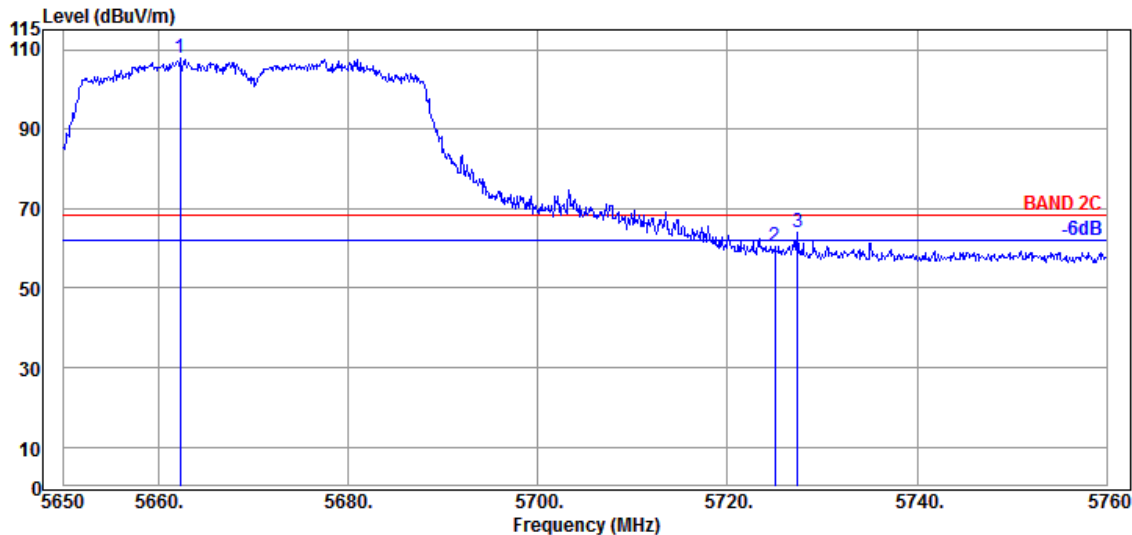


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.320	34.57	9.16	34.28	98.34	107.79	---	---	Peak
5725.020	34.90	9.20	34.30	50.75	60.55	68.20	7.65	Peak
5727.440	34.90	9.20	34.31	54.40	64.19	68.20	4.01	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

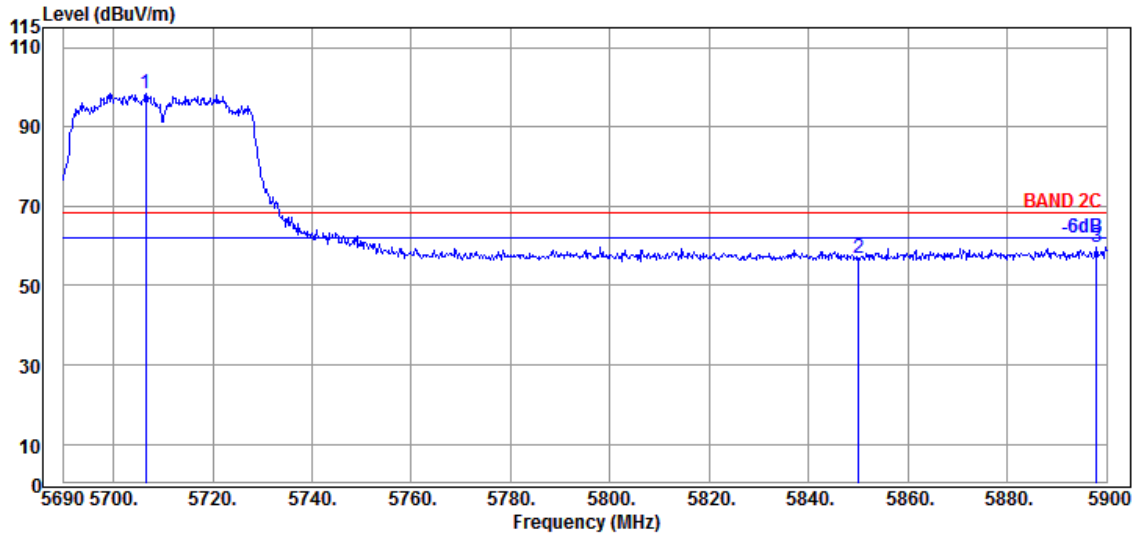

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.590	34.80	9.19	34.29	88.59	98.29	---	---	Peak
5850.020	35.40	9.25	34.36	46.57	56.86	68.20	11.34	Peak
5897.900	35.80	9.28	34.39	48.85	59.54	68.20	8.66	Peak

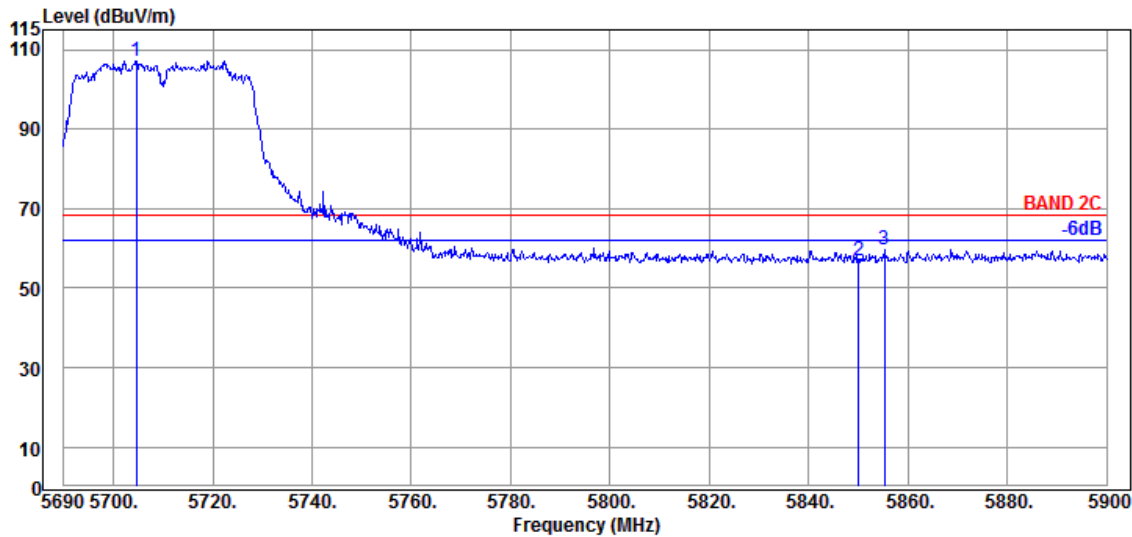


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.700	34.70	9.18	34.29	97.66	107.25	---	---	Peak
5850.020	35.40	9.25	34.36	46.62	56.91	68.20	11.29	Peak
5855.270	35.40	9.25	34.36	49.43	59.72	68.20	8.48	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

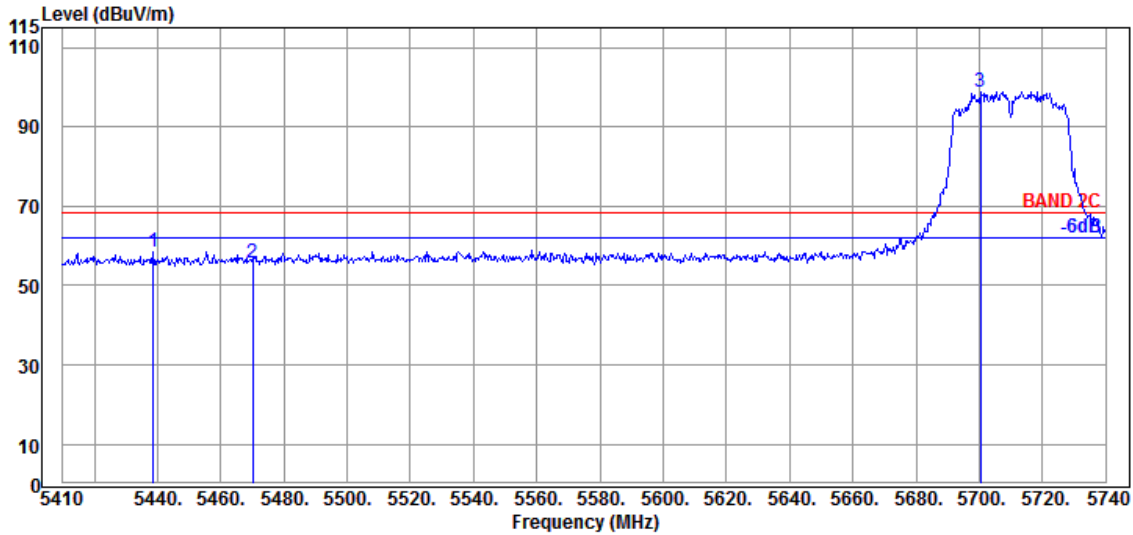

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.710	34.65	9.04	34.22	48.96	58.43	68.20	9.77	Peak
5470.060	34.63	9.06	34.21	46.06	55.54	68.20	12.66	Peak
@ 5700.400	34.70	9.18	34.29	89.39	98.98	---	---	Peak

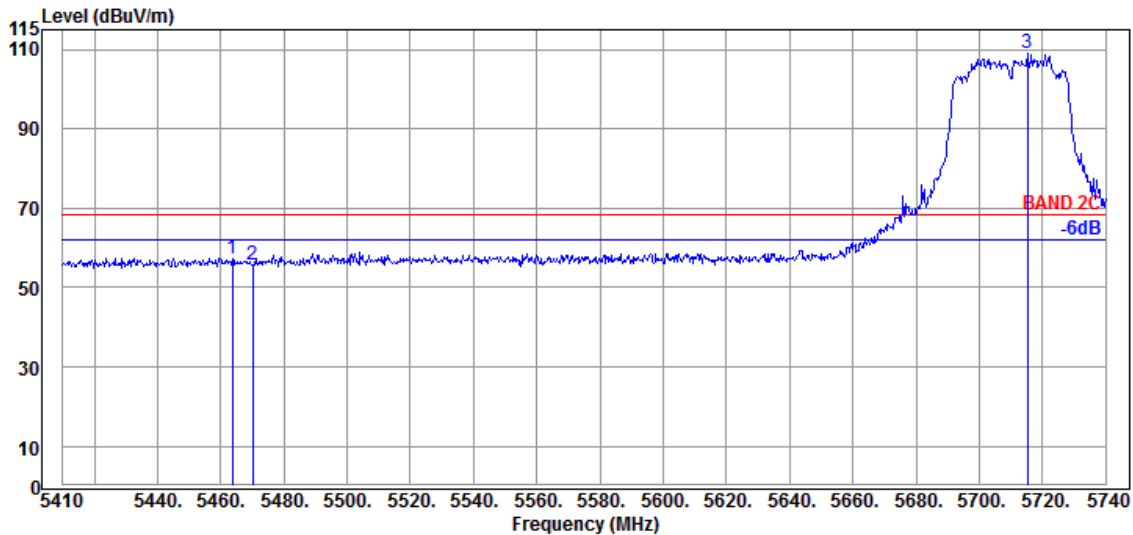


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.790	34.63	9.06	34.21	47.99	57.47	68.20	10.73	Peak
5470.060	34.63	9.06	34.21	46.40	55.88	68.20	12.32	Peak
@ 5715.250	34.80	9.19	34.30	99.23	108.92	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

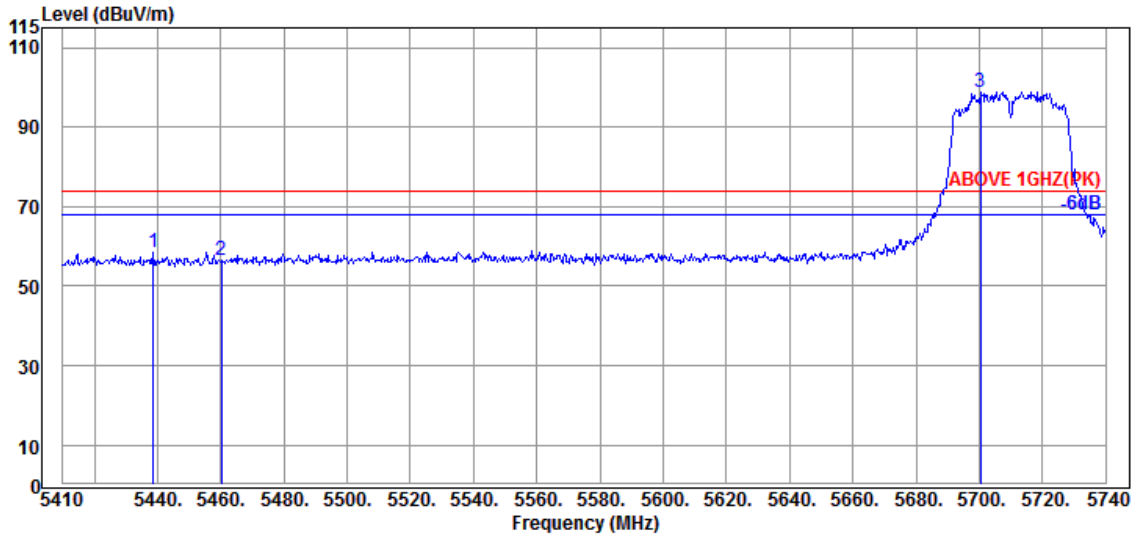

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.710	34.65	9.04	34.22	48.96	58.43	74.00	15.57	Peak
5460.160	34.60	9.05	34.21	46.89	56.33	74.00	17.67	Peak
@ 5700.400	34.70	9.18	34.29	89.39	98.98	---	---	Peak

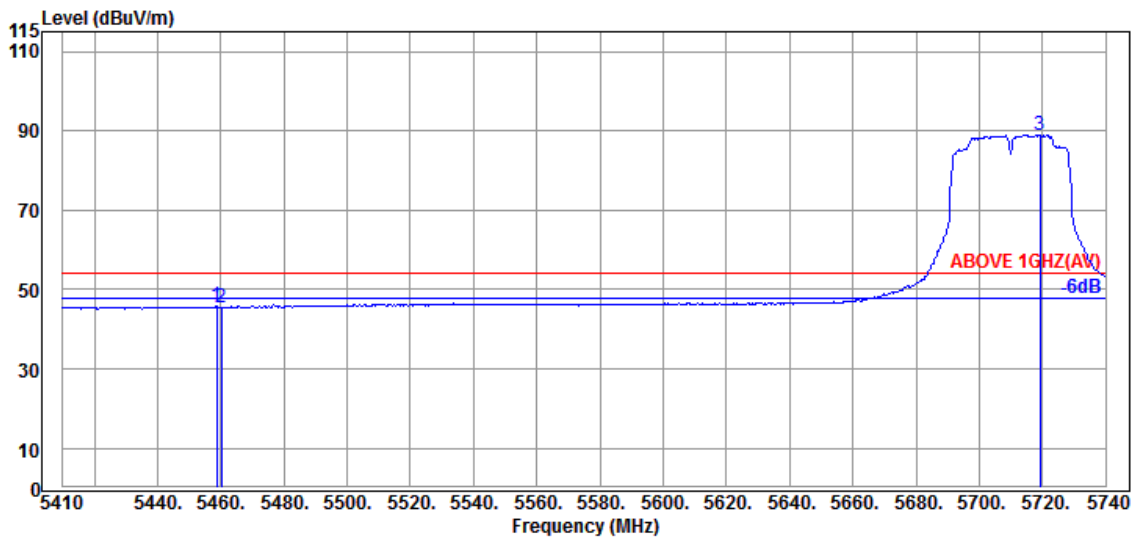


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.840	34.60	9.05	34.21	36.30	45.74	54.00	8.26	Average
5460.160	34.60	9.05	34.21	36.06	45.50	54.00	8.50	Average
@ 5719.210	34.80	9.19	34.30	79.18	88.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

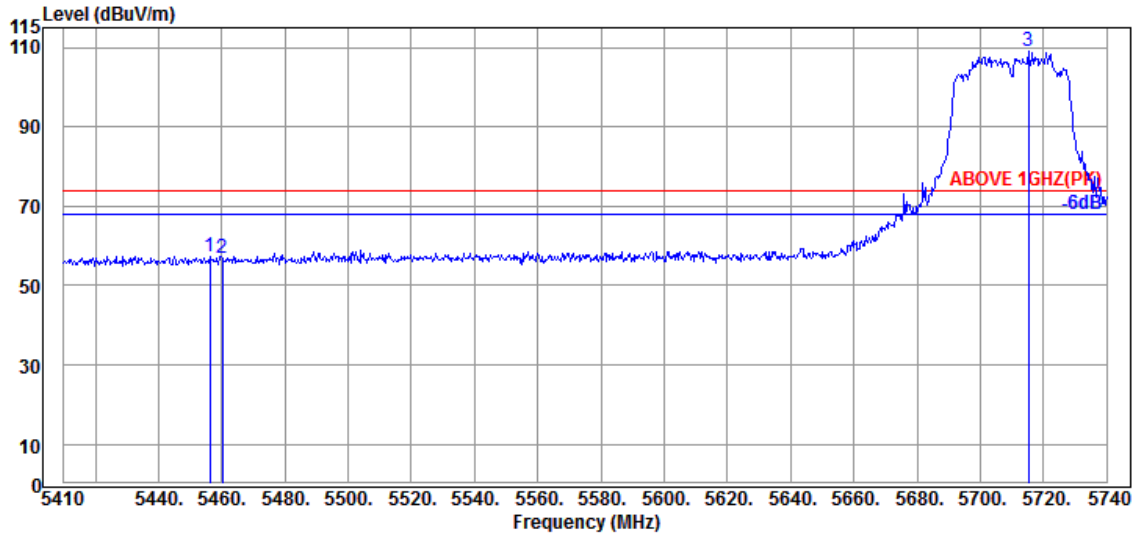

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.60	9.05	34.21	47.99	57.43	74.00	16.57	Peak
5460.160	34.60	9.05	34.21	47.47	56.91	74.00	17.09	Peak
@ 5715.250	34.80	9.19	34.30	99.23	108.92	---	---	Peak

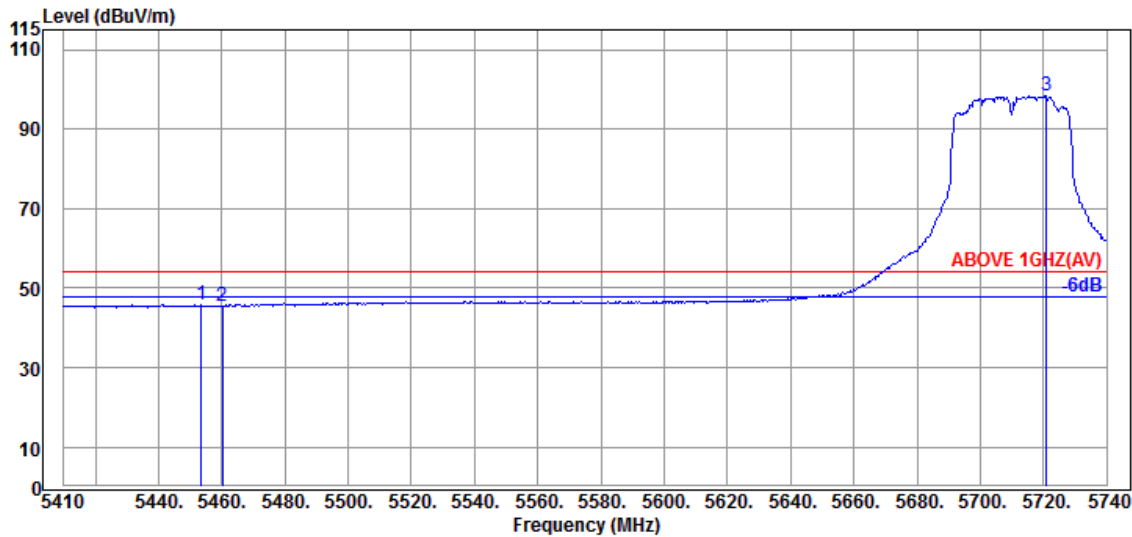


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.560	34.60	9.05	34.21	36.40	45.84	54.00	8.16	Average
5460.160	34.60	9.05	34.21	36.08	45.52	54.00	8.48	Average
@ 5720.860	34.80	9.19	34.30	88.72	98.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

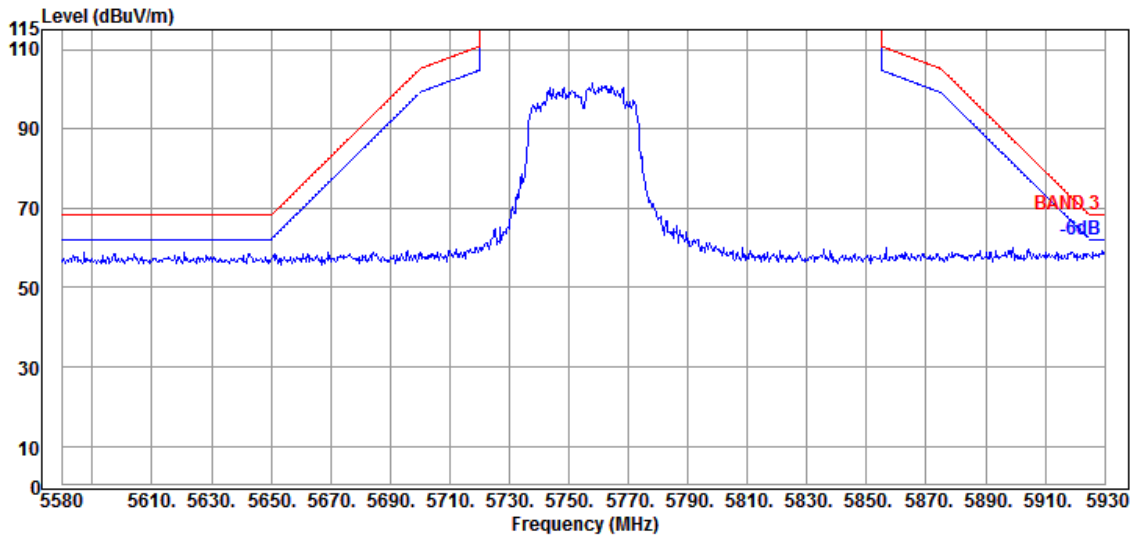


Antenna at Vertical Polarization

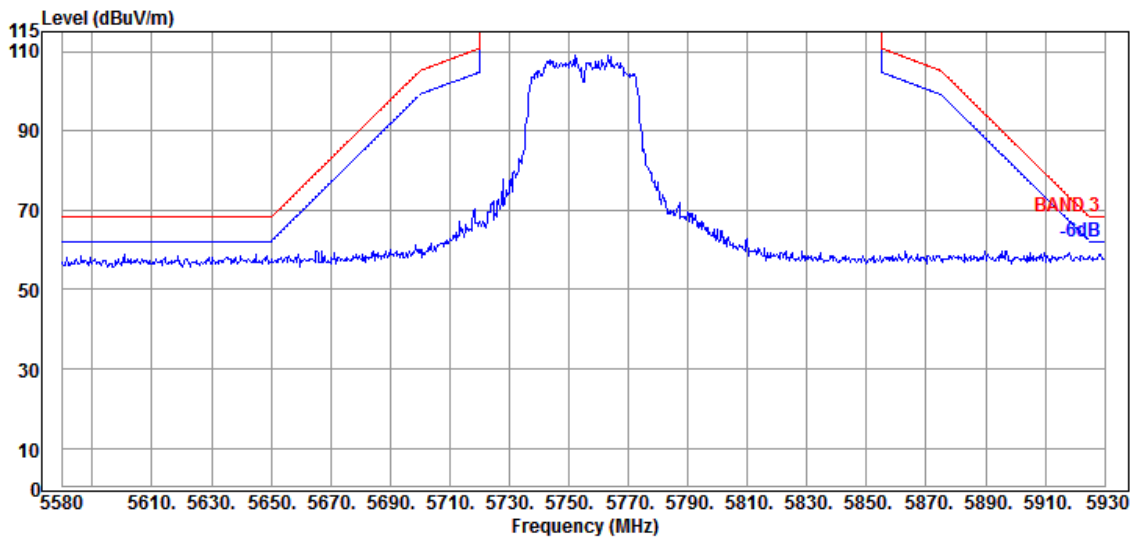


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

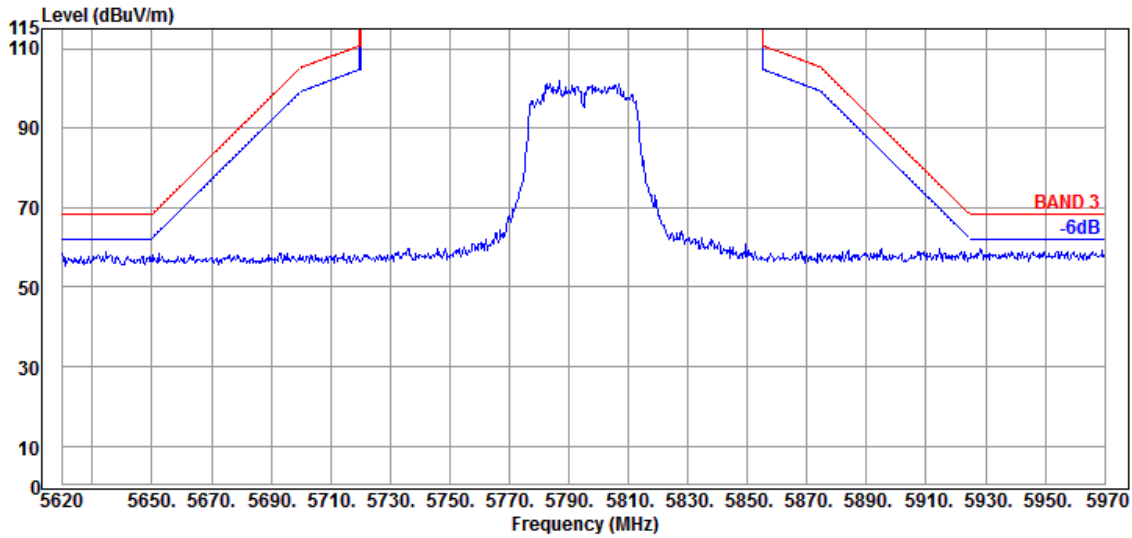

Antenna at Vertical Polarization

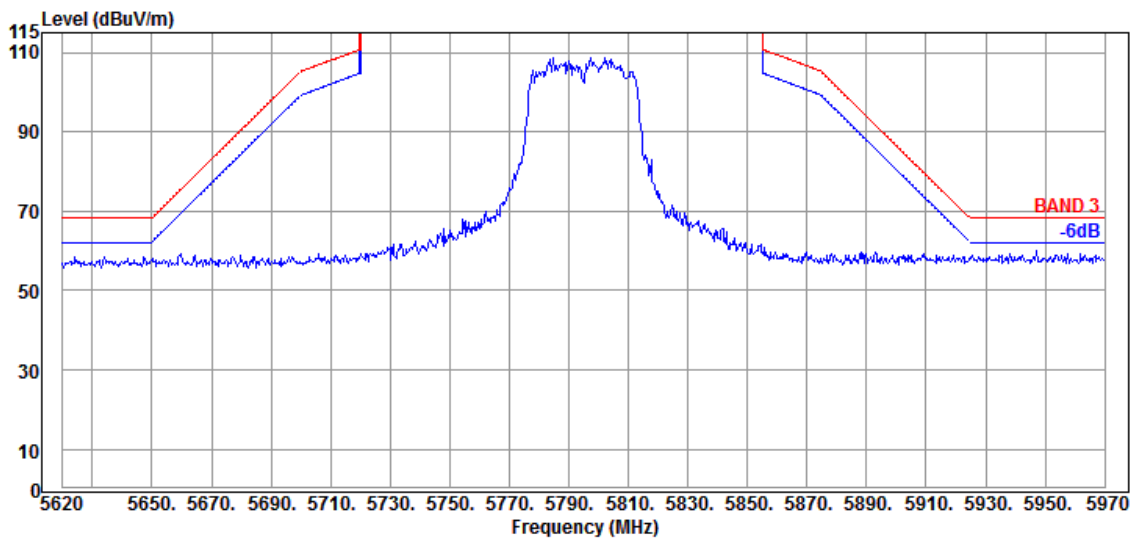


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

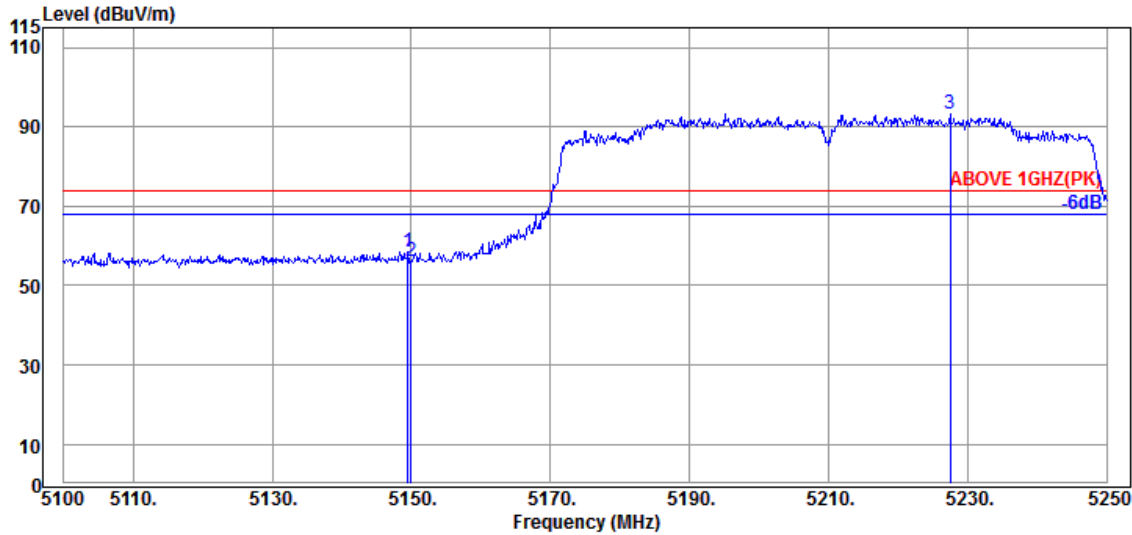

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.88	34.34	49.41	58.45	74.00	15.55	Peak
5149.950	34.50	8.88	34.34	47.14	56.18	74.00	17.82	Peak
@ 5227.500	34.60	8.93	34.30	84.20	93.43	---	---	Peak

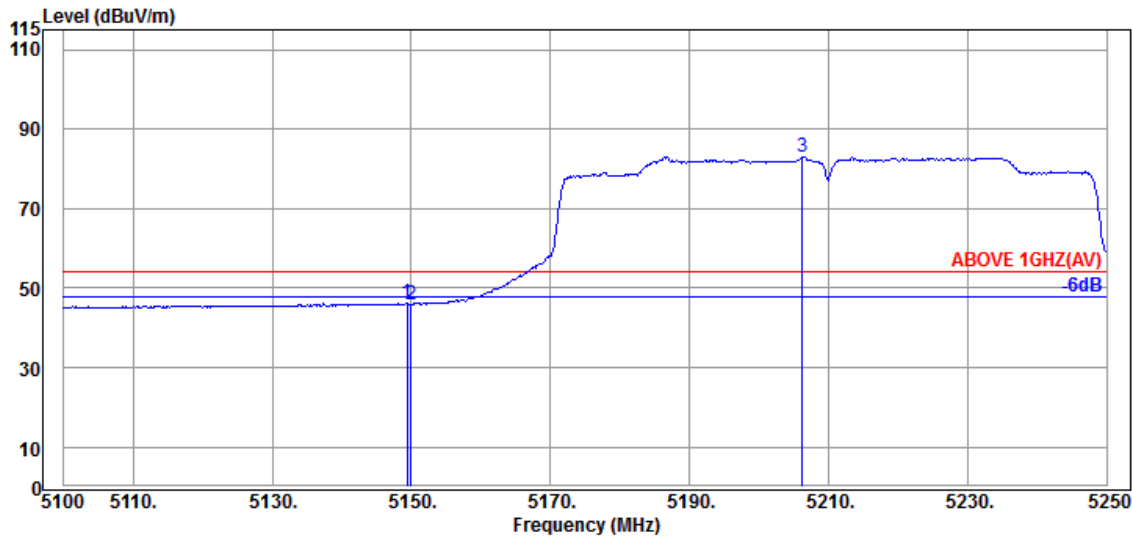


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.50	8.88	34.34	37.15	46.19	54.00	7.81	Average
5149.950	34.50	8.88	34.34	36.97	46.01	54.00	7.99	Average
@ 5206.200	34.65	8.92	34.32	73.91	83.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

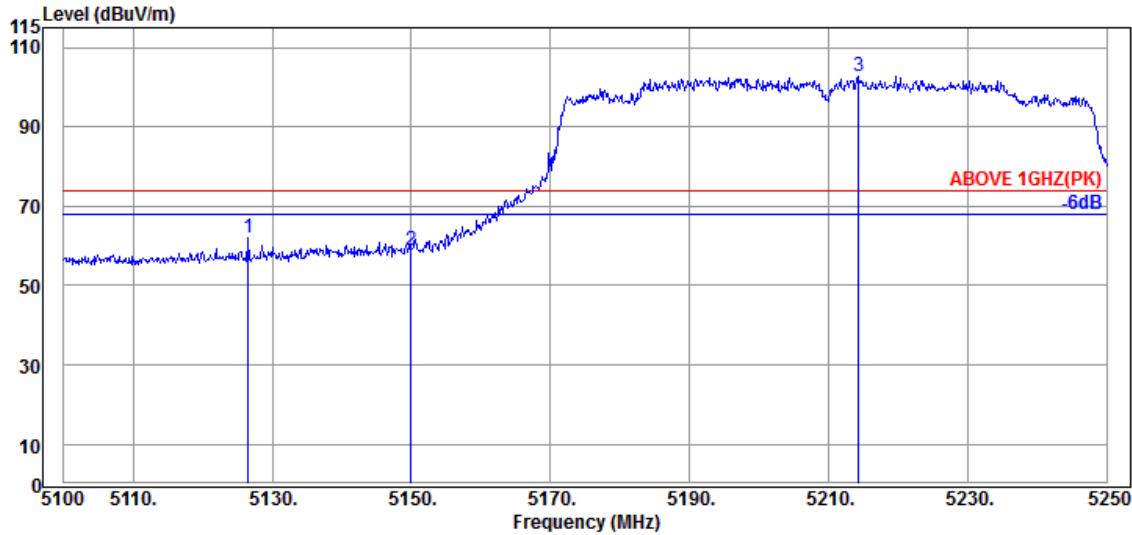

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.550	34.30	8.87	34.34	53.33	62.16	74.00	11.84	Peak
5149.950	34.50	8.88	34.34	49.77	58.81	74.00	15.19	Peak
@ 5214.300	34.65	8.92	34.31	93.58	102.84	---	---	Peak

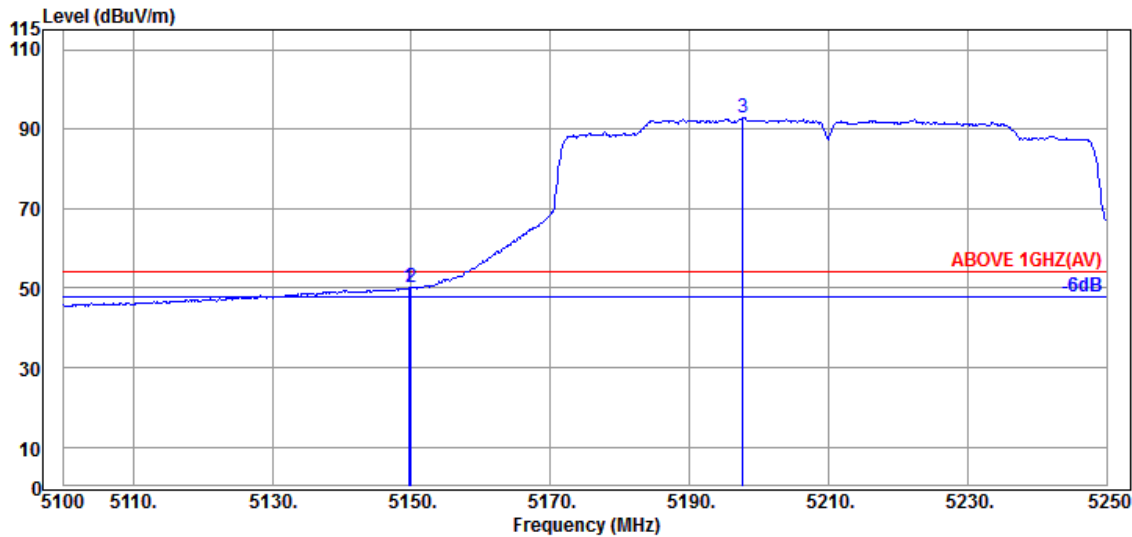


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.50	8.88	34.34	41.10	50.14	54.00	3.86	Average
5149.950	34.50	8.88	34.34	41.16	50.20	54.00	3.80	Average
@ 5197.650	34.70	8.91	34.32	83.56	92.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

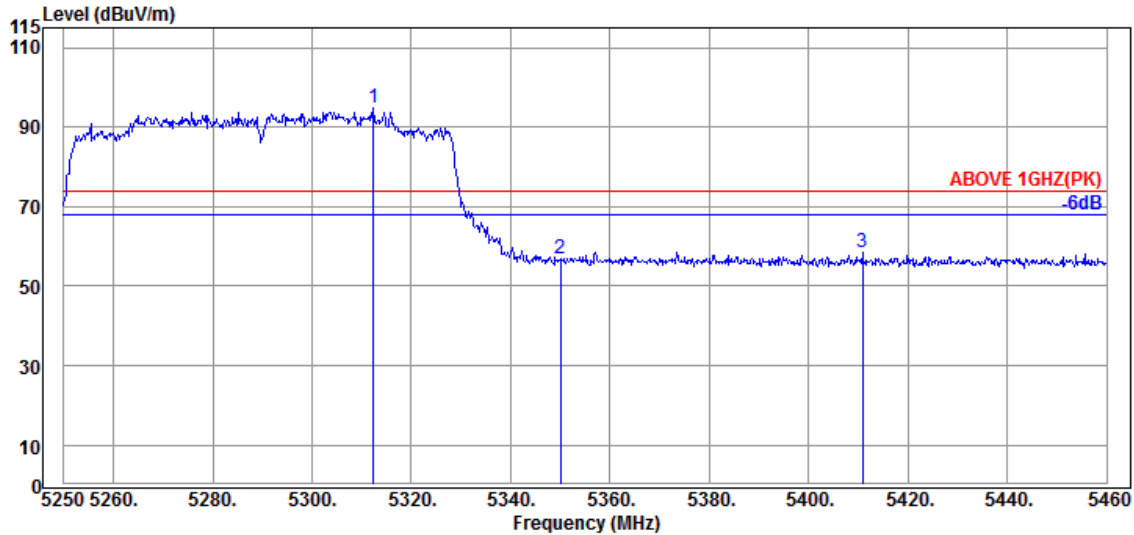

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.370	34.57	8.98	34.27	85.57	94.85	---	---	Peak
5349.960	34.90	8.99	34.26	47.25	56.88	74.00	17.12	Peak
5410.860	34.75	9.03	34.23	48.95	58.50	74.00	15.50	Peak

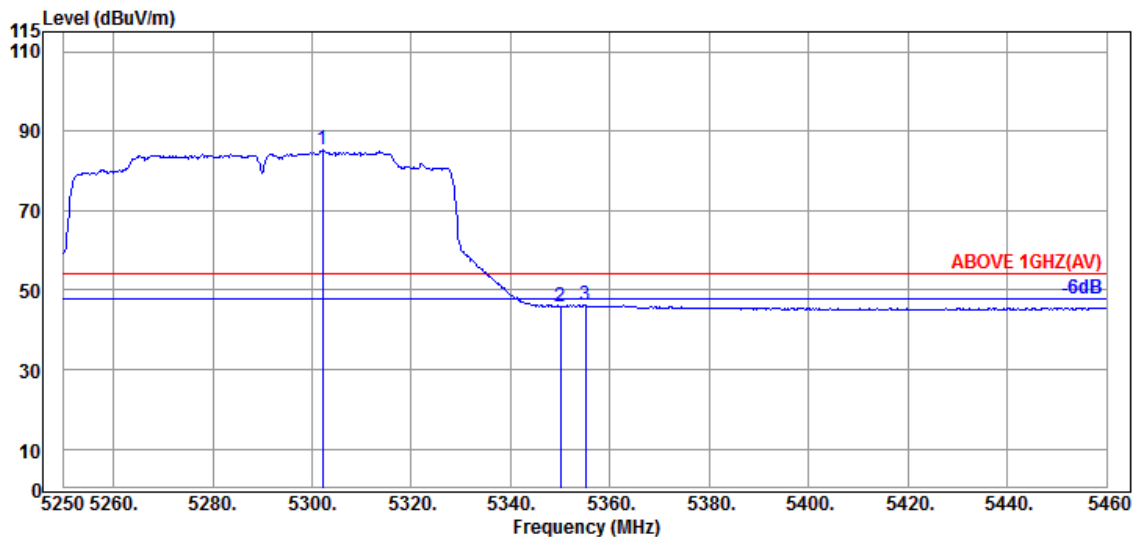


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.080	34.40	8.97	34.28	76.36	85.45	---	---	Average
5349.960	34.90	8.99	34.26	36.20	45.83	54.00	8.17	Average
5355.000	34.87	9.00	34.26	36.76	46.37	54.00	7.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

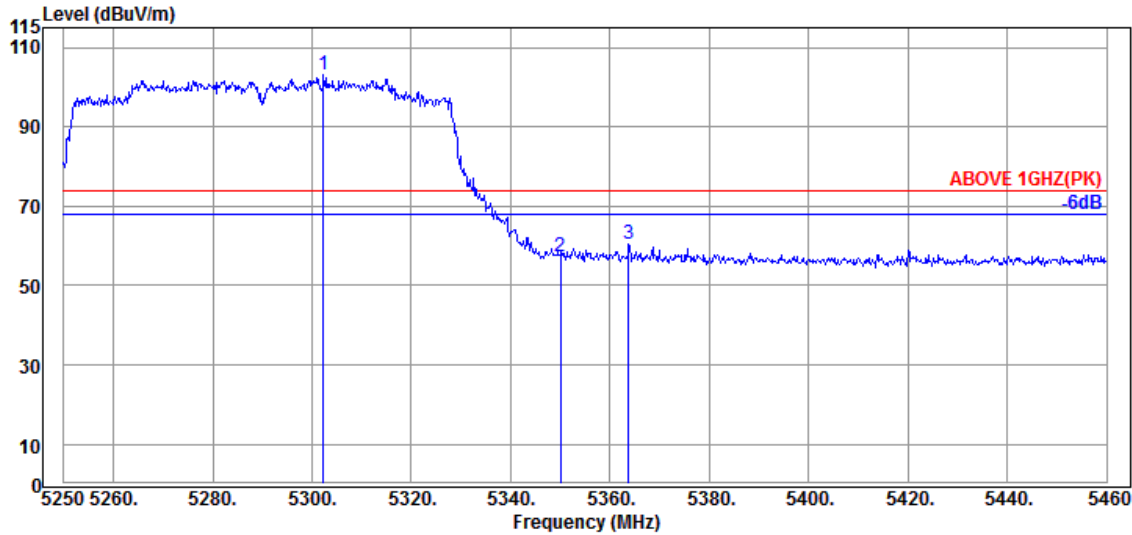

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.290	34.40	8.97	34.28	93.86	102.95	---	---	Peak
5349.960	34.90	8.99	34.26	47.58	57.21	74.00	16.79	Peak
5363.820	34.87	9.00	34.25	50.73	60.35	74.00	13.65	Peak

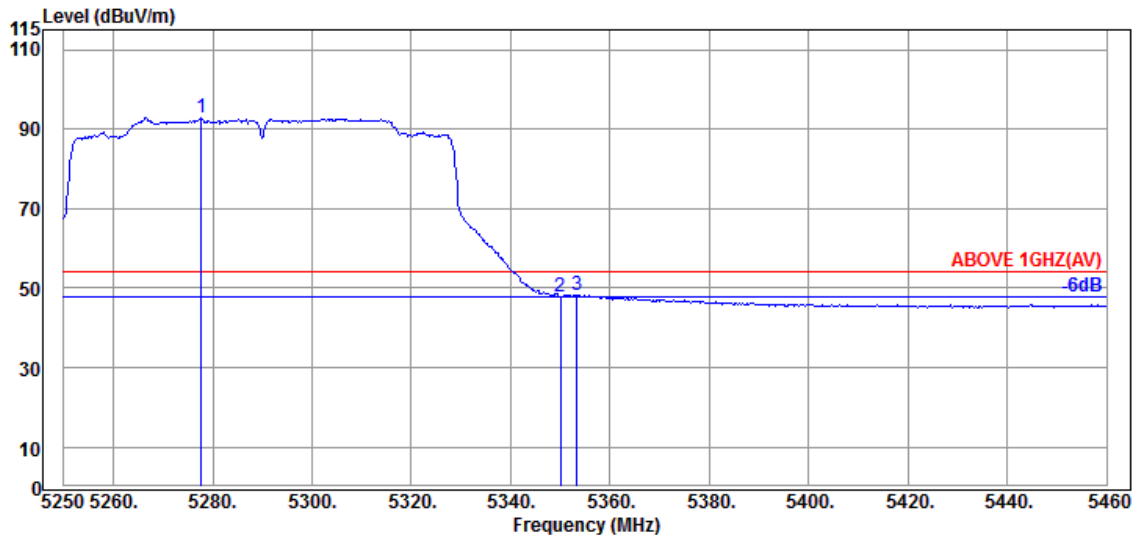


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.720	34.43	8.96	34.28	83.79	92.90	---	---	Average
5349.960	34.90	8.99	34.26	38.36	47.99	54.00	6.01	Average
5353.320	34.90	8.99	34.26	38.70	48.33	54.00	5.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

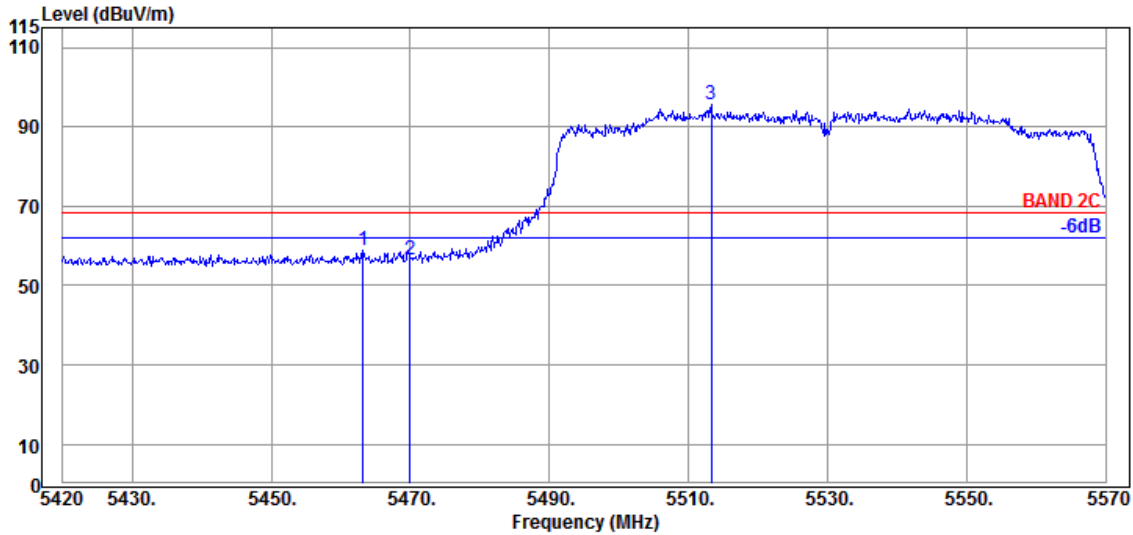

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.200	34.60	9.05	34.21	49.57	59.01	68.20	9.19	Peak
5469.950	34.63	9.06	34.21	47.19	56.67	68.20	11.53	Peak
@ 5513.300	34.70	9.09	34.21	86.05	95.63	---	---	Peak

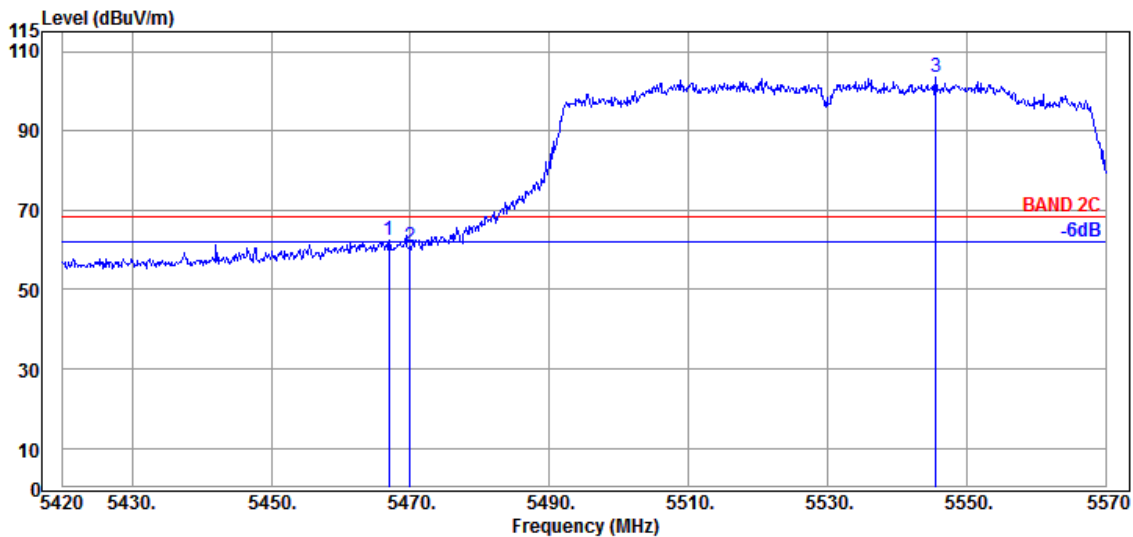


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.950	34.63	9.06	34.21	52.82	62.30	68.20	5.90	Peak
5469.950	34.63	9.06	34.21	51.26	60.74	68.20	7.46	Peak
@ 5545.550	34.70	9.10	34.23	94.16	103.73	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

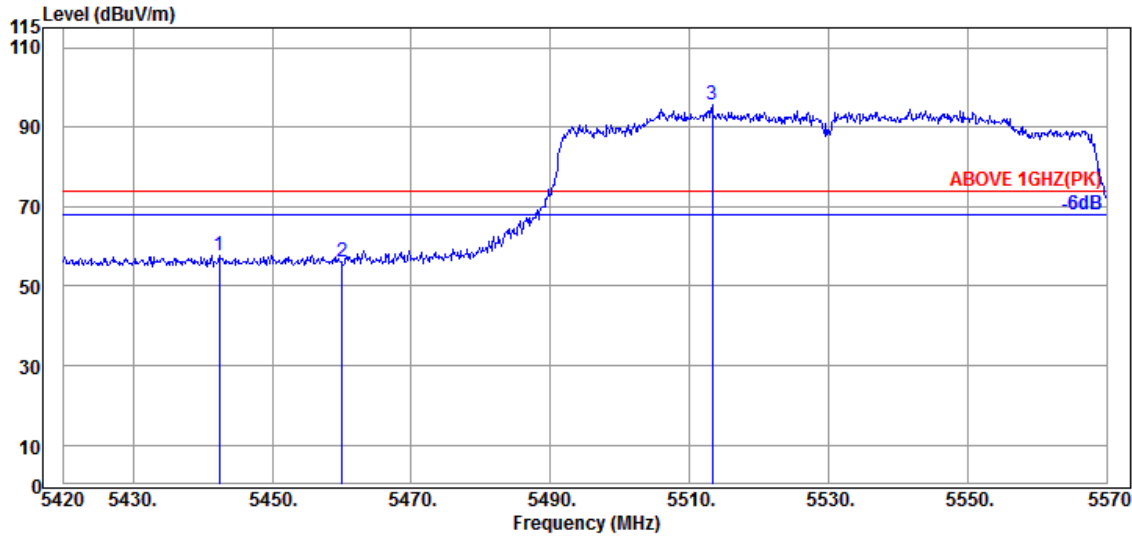

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.350	34.65	9.04	34.22	48.31	57.78	74.00	16.22	Peak
5460.050	34.60	9.05	34.21	46.75	56.19	74.00	17.81	Peak
@ 5513.300	34.70	9.09	34.21	86.05	95.63	---	---	Peak

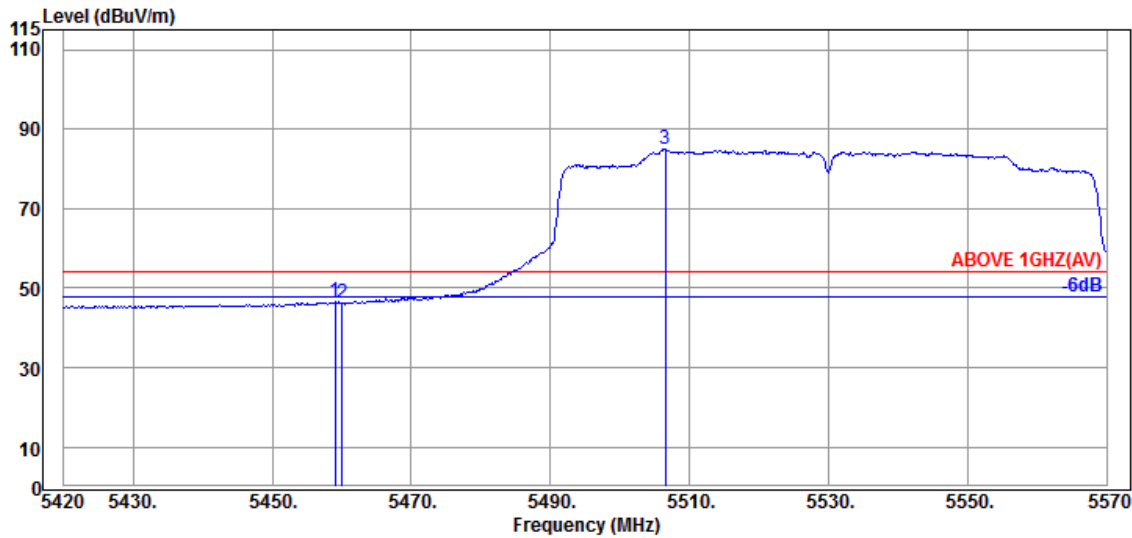


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.60	9.05	34.21	37.06	46.50	54.00	7.50	Average
5460.050	34.60	9.05	34.21	36.80	46.24	54.00	7.76	Average
@ 5506.550	34.70	9.08	34.21	75.41	84.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

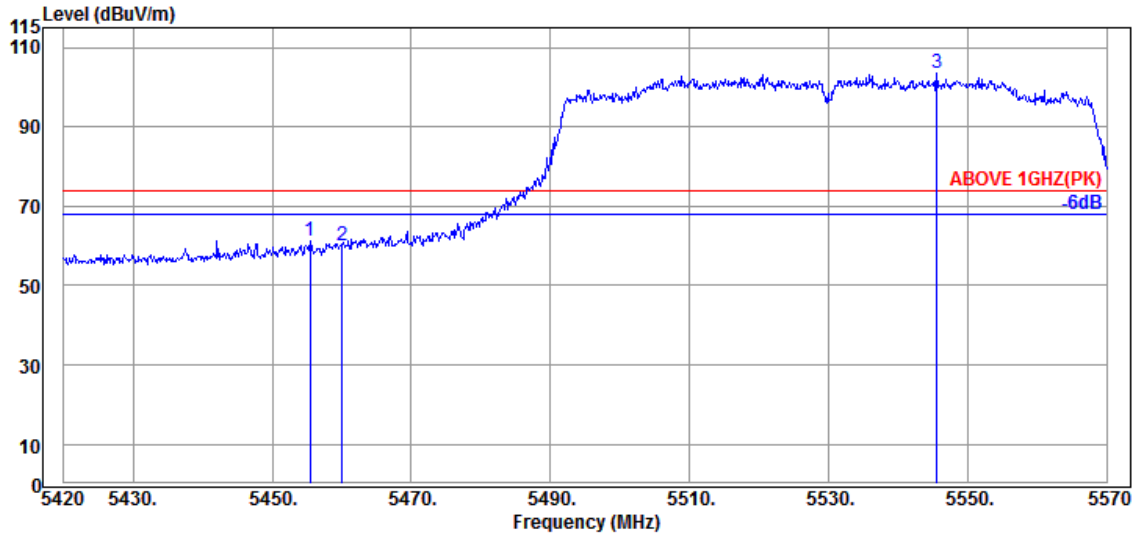

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.400	34.60	9.05	34.21	51.91	61.35	74.00	12.65	Peak
5460.050	34.60	9.05	34.21	50.59	60.03	74.00	13.97	Peak
@ 5545.550	34.70	9.10	34.23	94.16	103.73	---	---	Peak

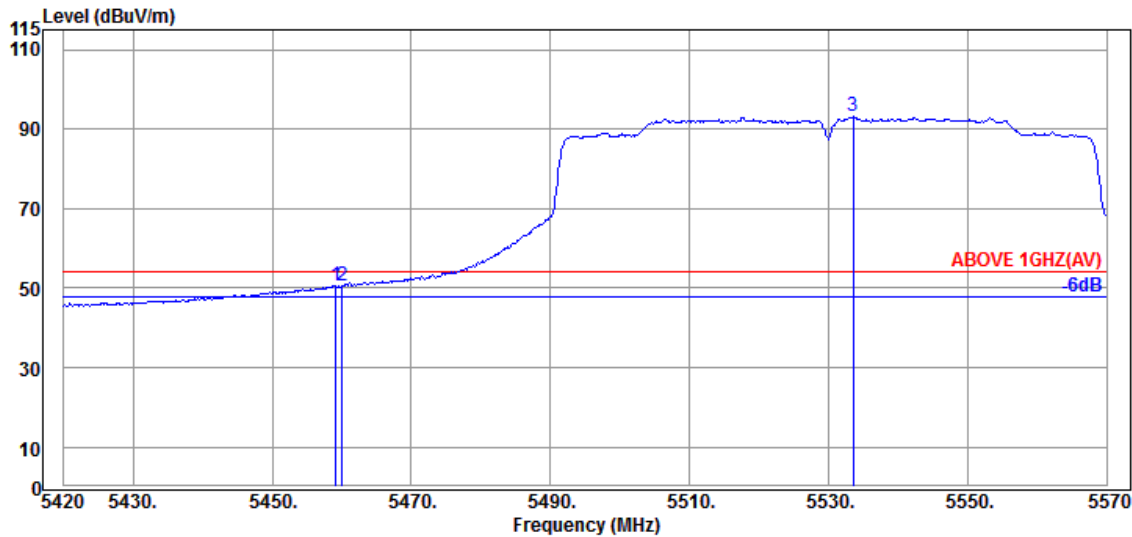


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.150	34.60	9.05	34.21	41.15	50.59	54.00	3.41	Average
5460.050	34.60	9.05	34.21	41.17	50.61	54.00	3.39	Average
@ 5533.550	34.70	9.09	34.22	83.57	93.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

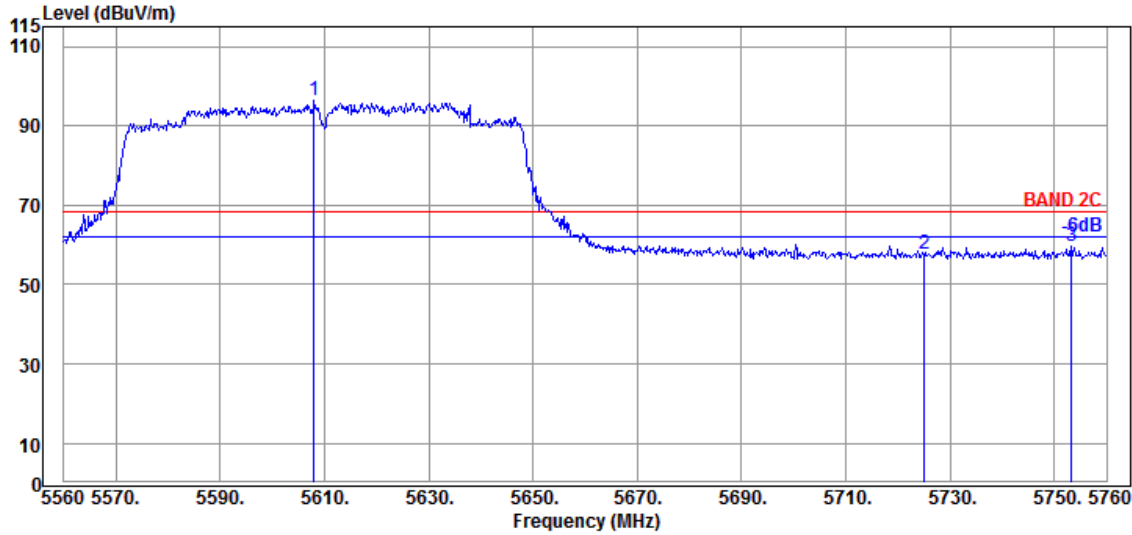

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5608.000	34.43	9.14	34.25	87.05	96.37	---	---	Peak
5725.000	34.90	9.20	34.30	47.97	57.77	68.20	10.43	Peak
5753.200	35.00	9.20	34.32	49.75	59.63	68.20	8.57	Peak

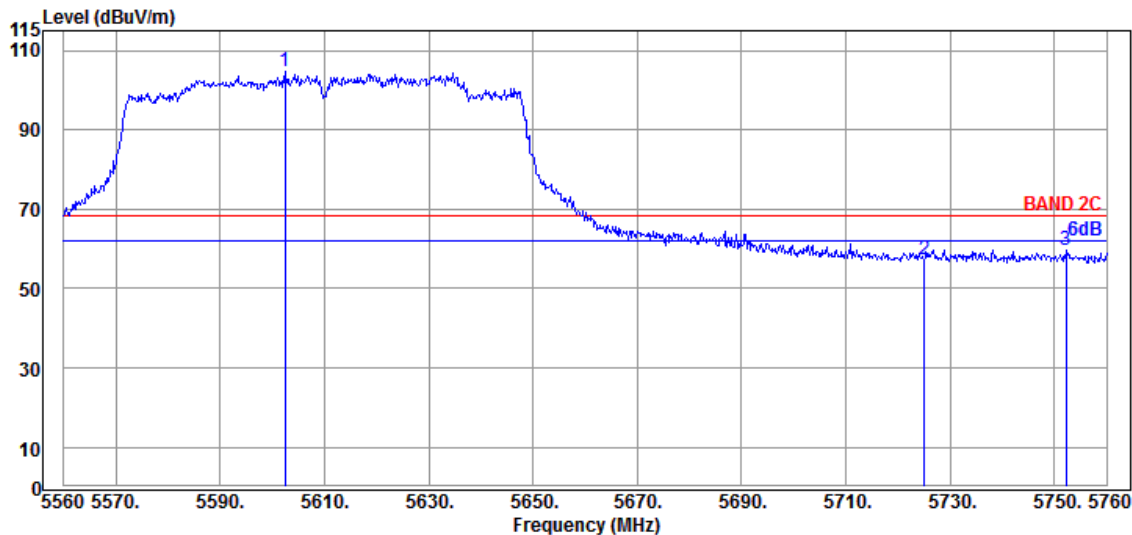


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5602.400	34.40	9.13	34.25	95.26	104.54	---	---	Peak
5725.000	34.90	9.20	34.30	47.69	57.49	68.20	10.71	Peak
5752.200	35.00	9.20	34.32	49.68	59.56	68.20	8.64	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

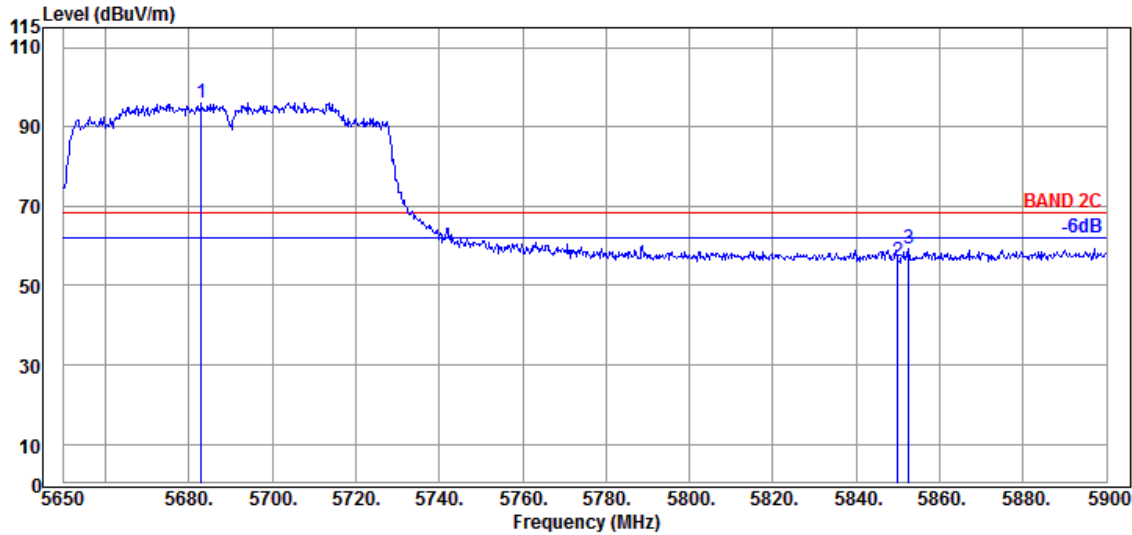

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.000	34.63	9.17	34.29	86.59	96.10	---	---	Peak
5850.000	35.40	9.25	34.36	45.90	56.19	68.20	12.01	Peak
5852.500	35.40	9.25	34.36	48.94	59.23	68.20	8.97	Peak

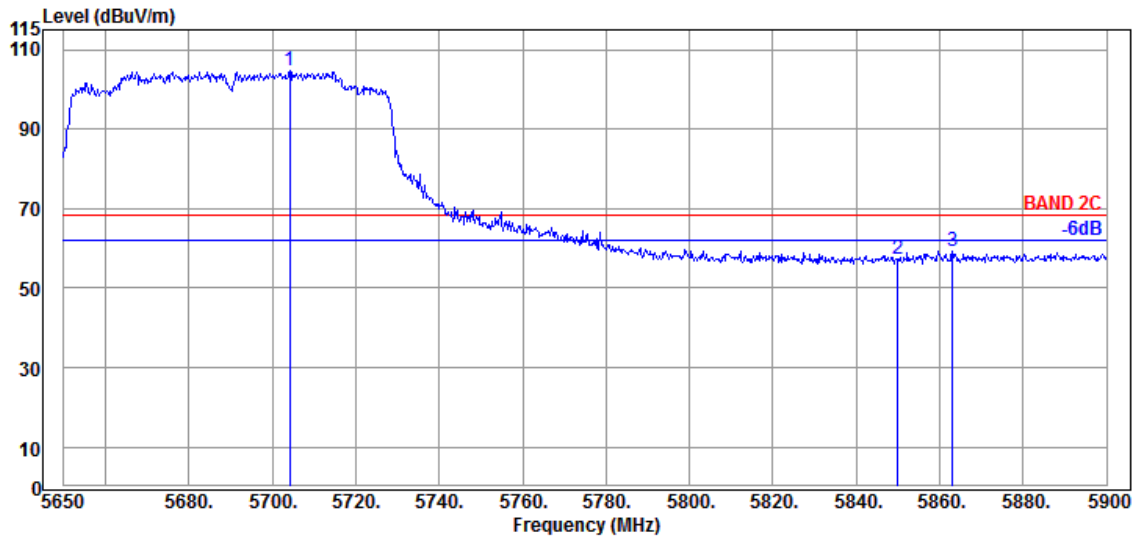


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.250	34.70	9.18	34.29	95.03	104.62	---	---	Peak
5850.000	35.40	9.25	34.36	46.87	57.16	68.20	11.04	Peak
5863.000	35.53	9.26	34.37	49.02	59.44	68.20	8.76	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

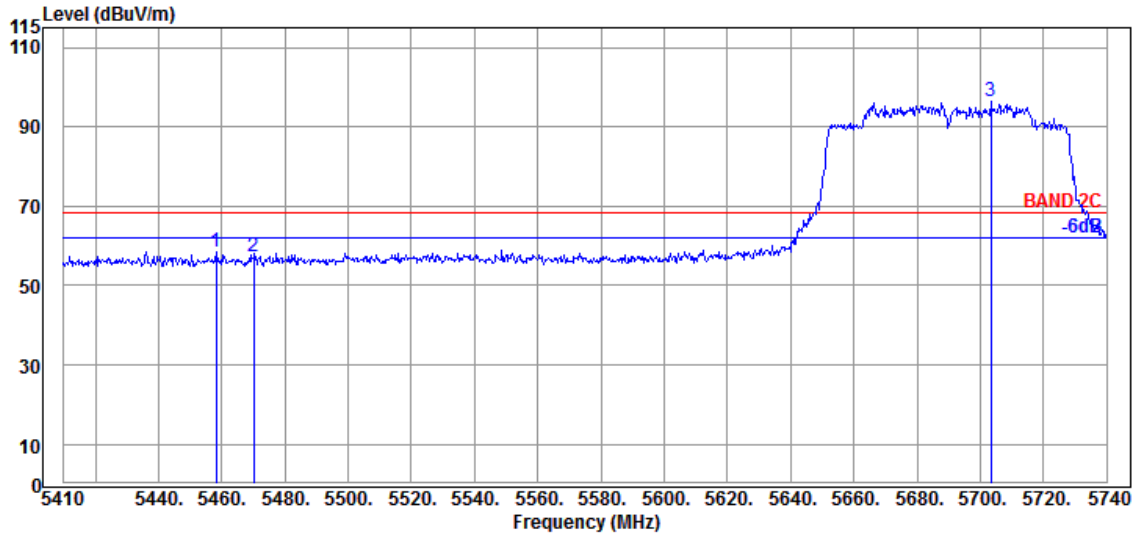

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.180	34.60	9.05	34.21	49.05	58.49	68.20	9.71	Peak
5470.060	34.63	9.06	34.21	47.64	57.12	68.20	11.08	Peak
@ 5703.370	34.70	9.18	34.29	86.90	96.49	---	---	Peak

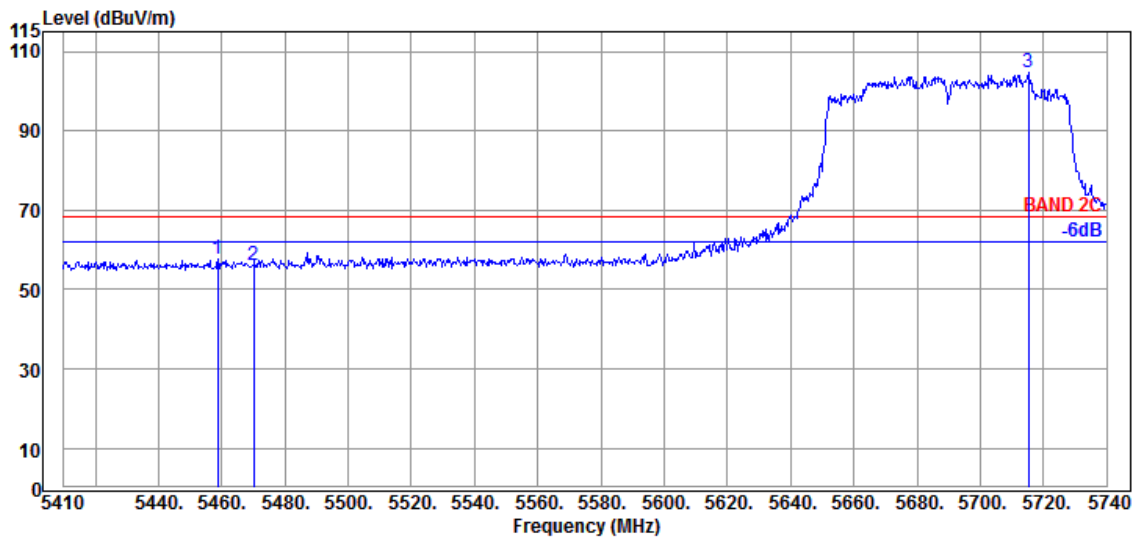


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.840	34.60	9.05	34.21	48.13	57.57	68.20	10.63	Peak
5470.060	34.63	9.06	34.21	46.63	56.11	68.20	12.09	Peak
@ 5715.250	34.80	9.19	34.30	94.91	104.60	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

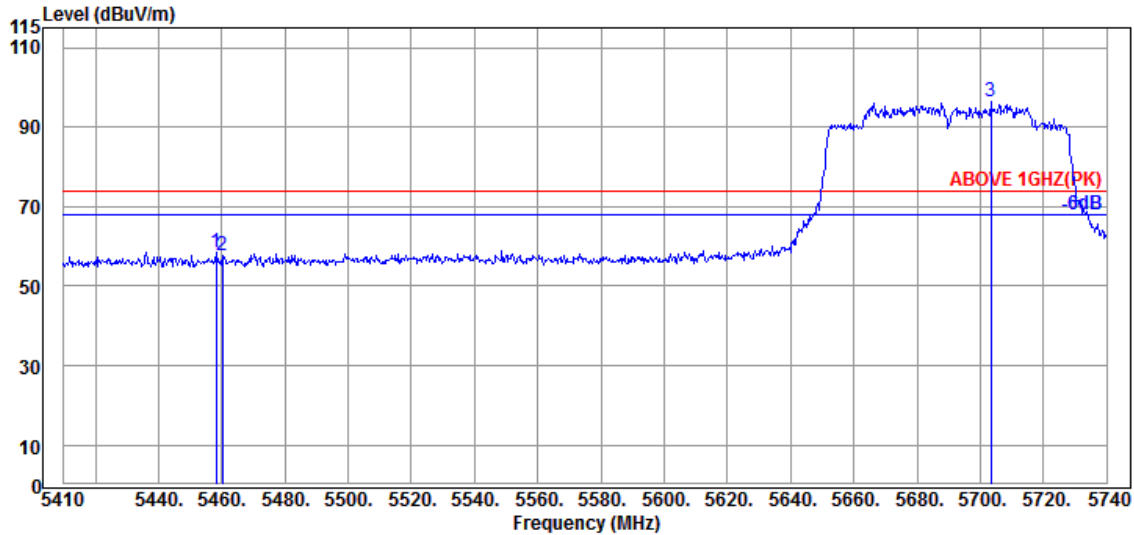

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.180	34.60	9.05	34.21	49.05	58.49	74.00	15.51	Peak
5460.160	34.60	9.05	34.21	48.34	57.78	74.00	16.22	Peak
@ 5703.370	34.70	9.18	34.29	86.90	96.49	---	---	Peak

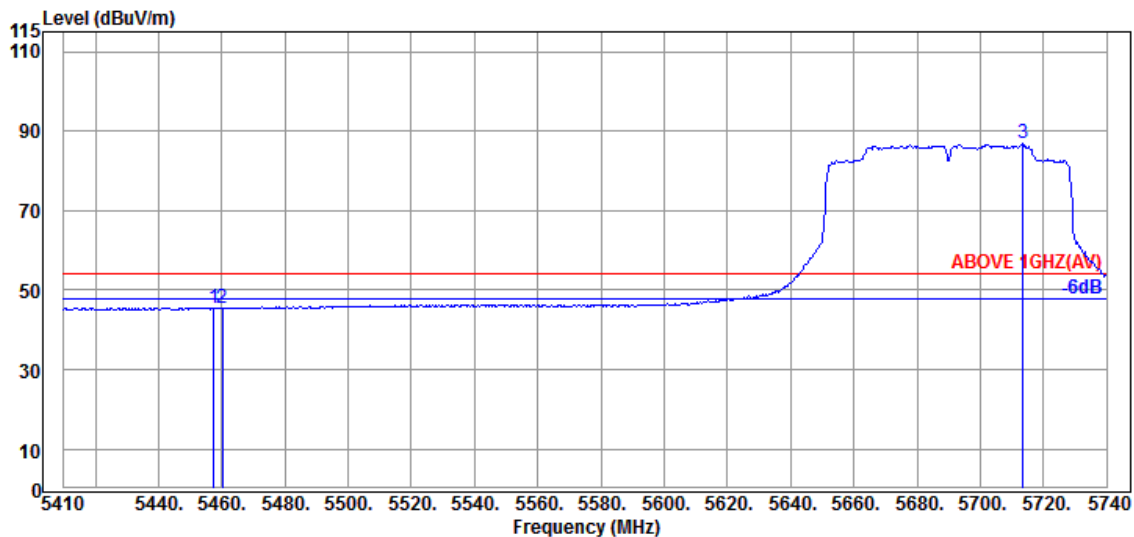


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.520	34.60	9.05	34.21	36.06	45.50	54.00	8.50	Average
5460.160	34.60	9.05	34.21	36.04	45.48	54.00	8.52	Average
@ 5713.600	34.80	9.19	34.30	77.28	86.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

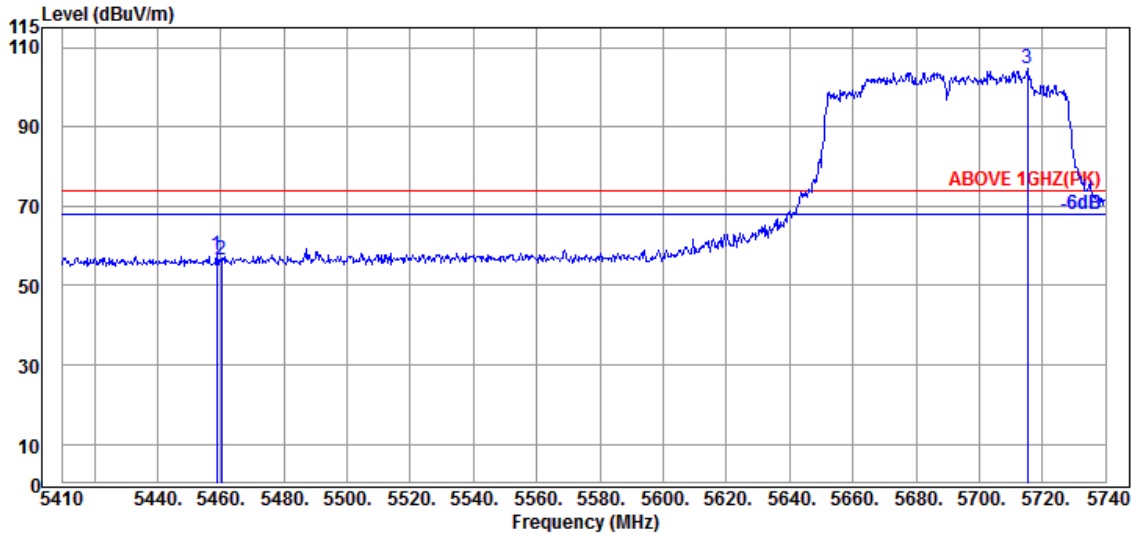

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.840	34.60	9.05	34.21	48.13	57.57	74.00	16.43	Peak
5460.160	34.60	9.05	34.21	47.08	56.52	74.00	17.48	Peak
@ 5715.250	34.80	9.19	34.30	94.91	104.60	---	---	Peak

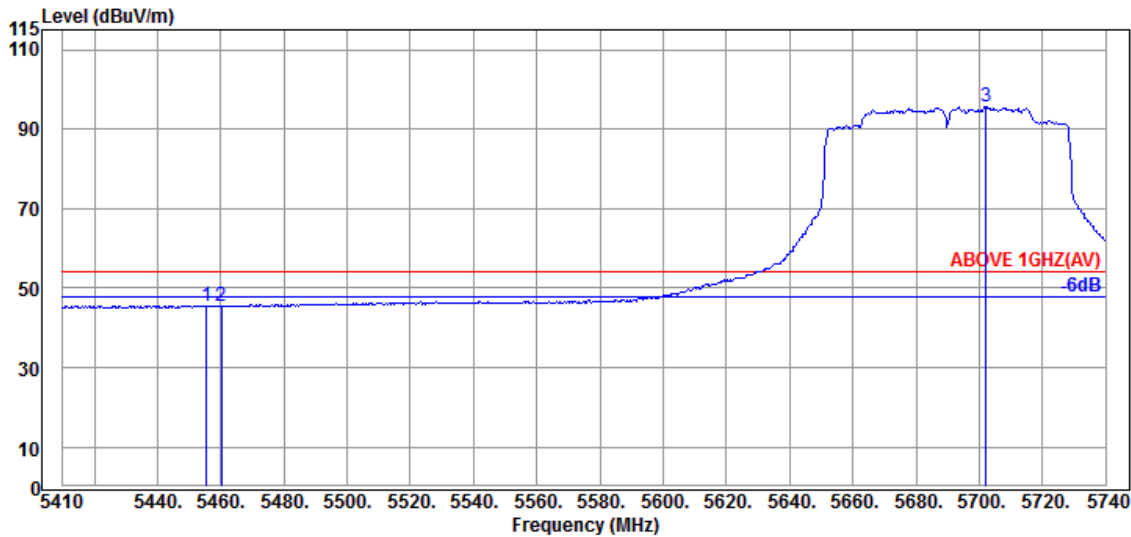


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.540	34.60	9.05	34.21	36.09	45.53	54.00	8.47	Average
5460.160	34.60	9.05	34.21	36.13	45.57	54.00	8.43	Average
@ 5702.050	34.70	9.18	34.29	86.24	95.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

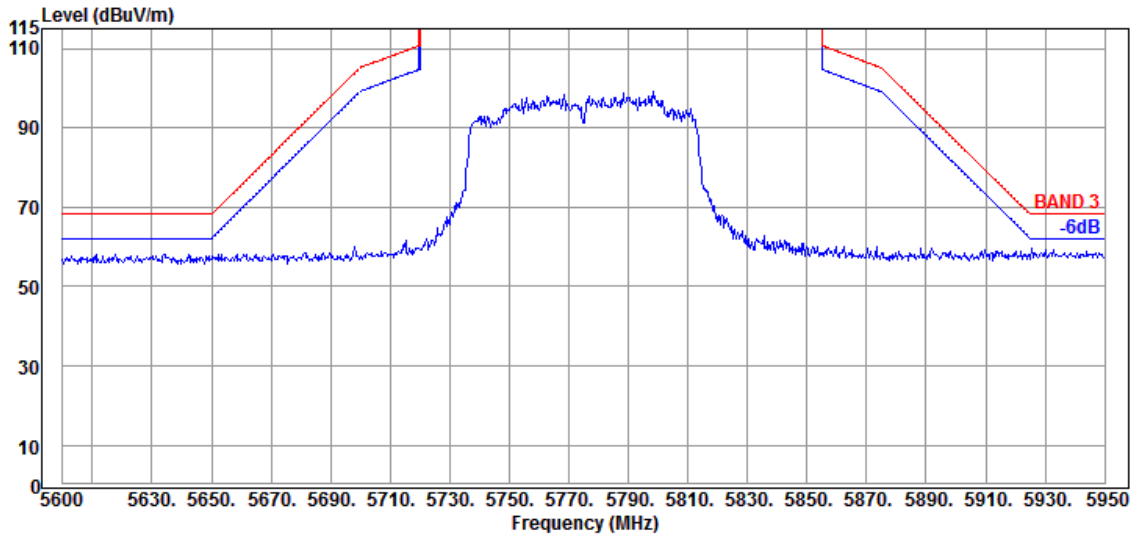

Antenna at Vertical Polarization

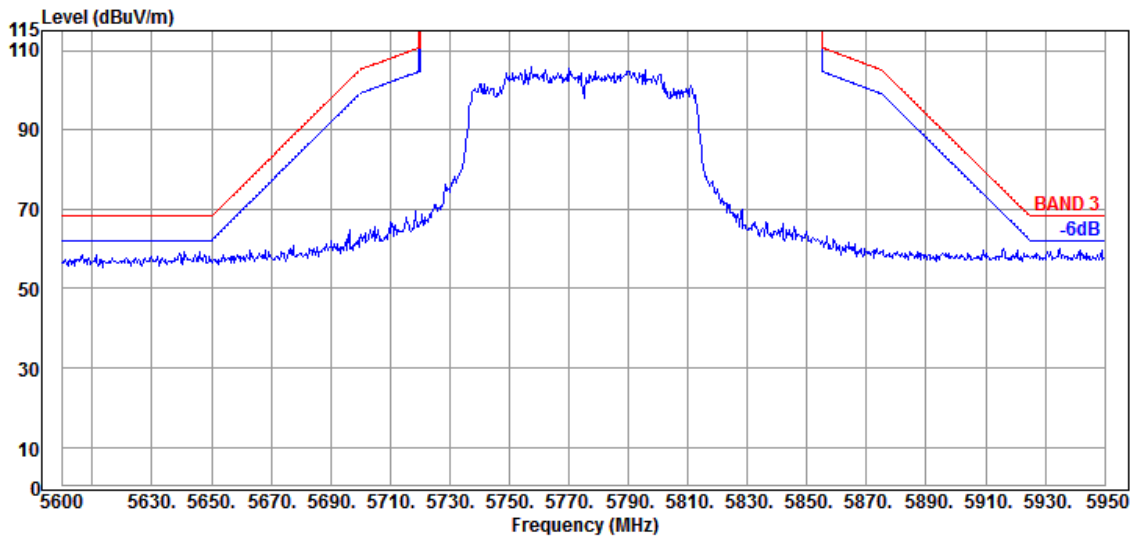


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

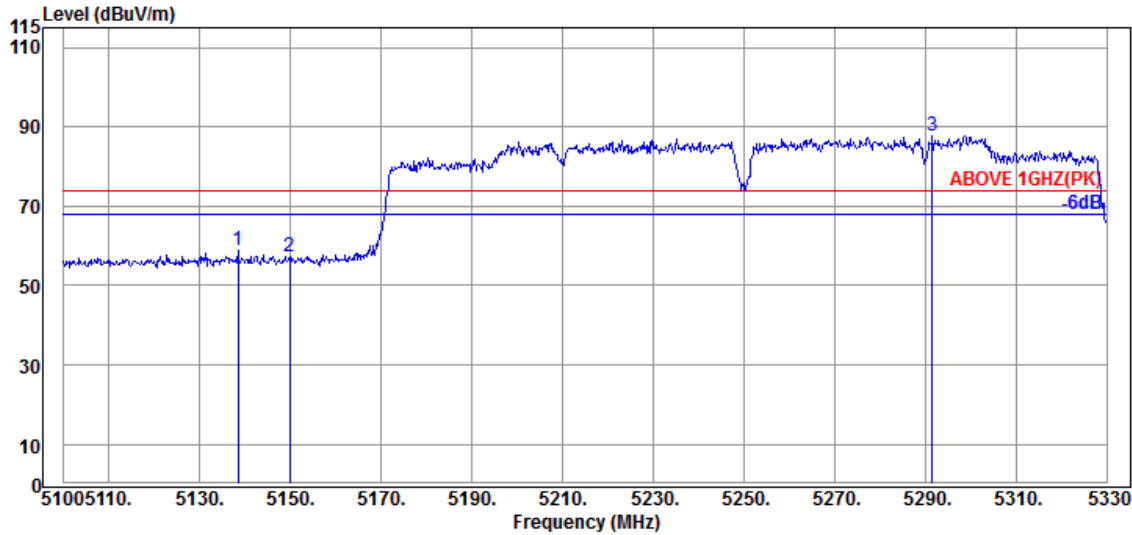

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.410	34.40	8.88	34.34	49.84	58.78	74.00	15.22	Peak
5149.910	34.50	8.88	34.34	48.16	57.20	74.00	16.80	Peak
@ 5291.590	34.43	8.96	34.28	78.74	87.85	---	---	Peak

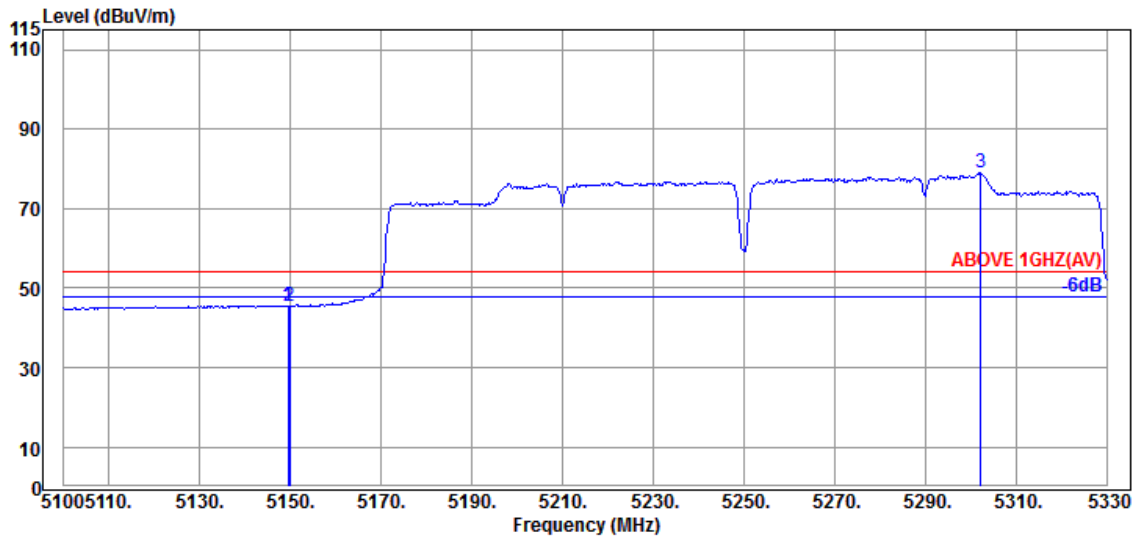


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.50	8.88	34.34	36.56	45.60	54.00	8.40	Average
5149.910	34.50	8.88	34.34	36.48	45.52	54.00	8.48	Average
@ 5302.170	34.40	8.97	34.28	69.93	79.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

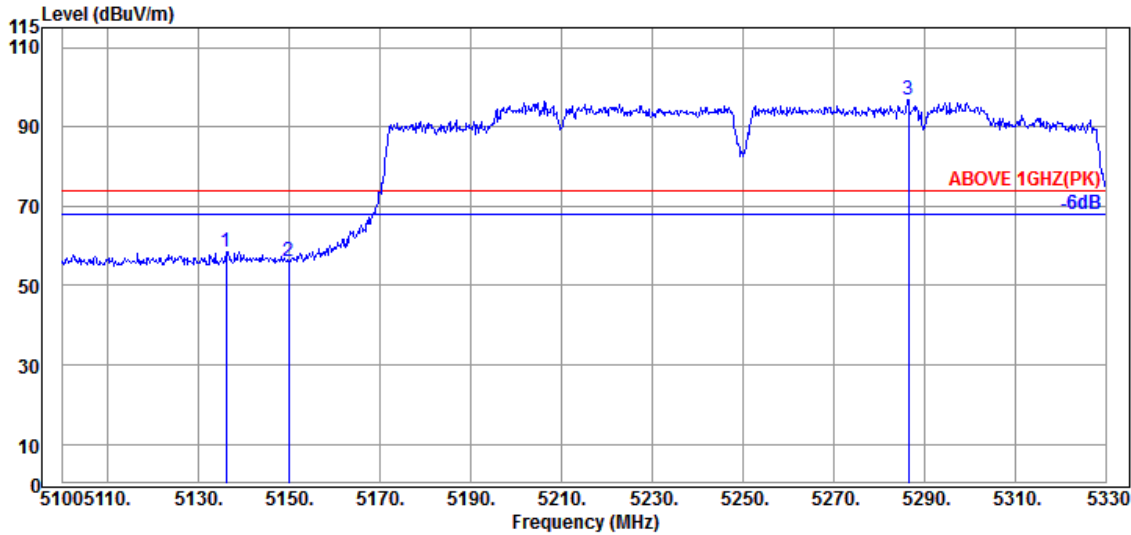

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.110	34.40	8.88	34.34	49.69	58.63	74.00	15.37	Peak
5149.910	34.50	8.88	34.34	47.02	56.06	74.00	17.94	Peak
@ 5286.530	34.43	8.96	34.28	87.67	96.78	---	---	Peak

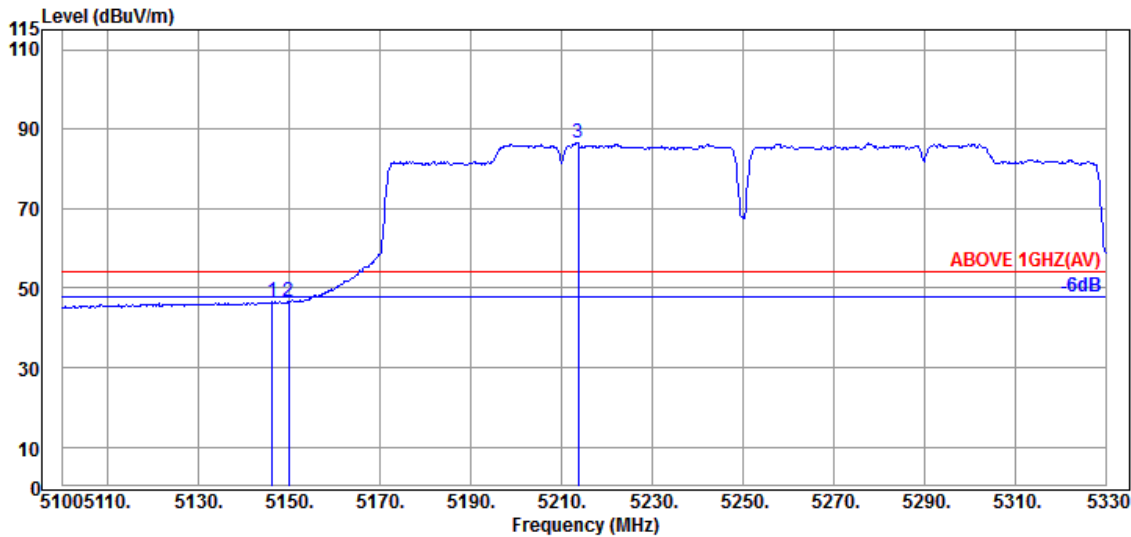


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.230	34.50	8.88	34.34	37.50	46.54	54.00	7.46	Average
5149.910	34.50	8.88	34.34	37.41	46.45	54.00	7.55	Average
@ 5213.620	34.65	8.92	34.31	77.37	86.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

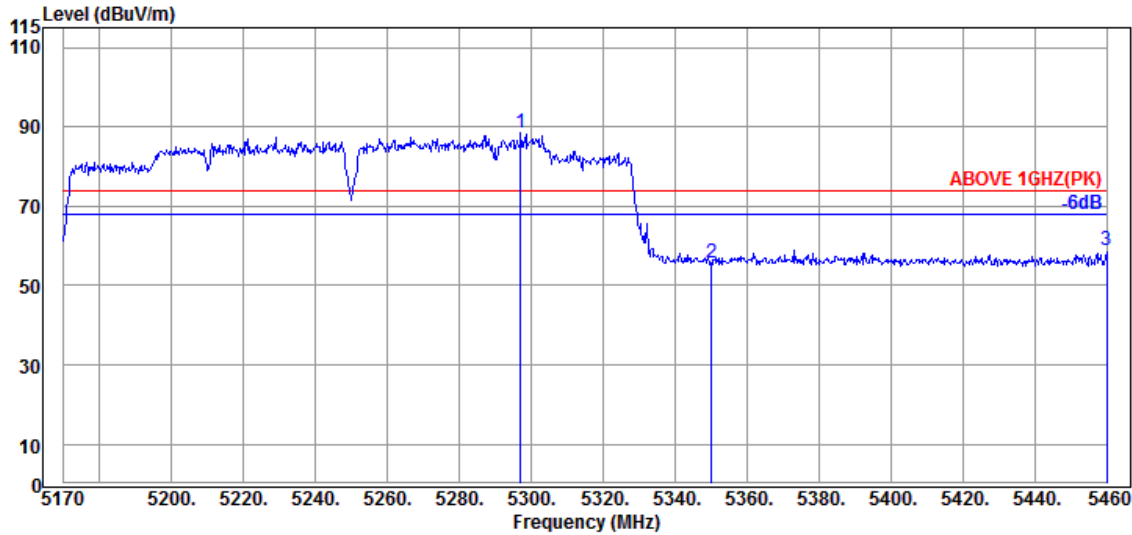

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.020	34.40	8.97	34.28	79.35	88.44	---	---	Peak
5350.090	34.90	8.99	34.26	46.03	55.66	74.00	18.34	Peak
5460.000	34.60	9.05	34.21	49.32	58.76	74.00	15.24	Peak

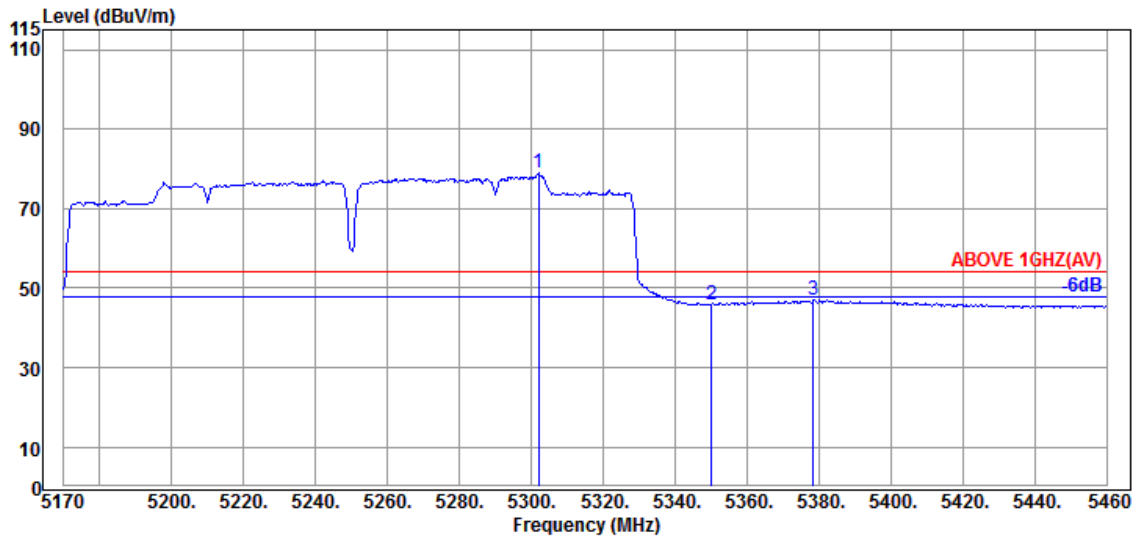


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.950	34.40	8.97	34.28	69.89	78.98	---	---	Average
5350.090	34.90	8.99	34.26	36.35	45.98	54.00	8.02	Average
5378.510	34.83	9.01	34.25	37.42	47.01	54.00	6.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

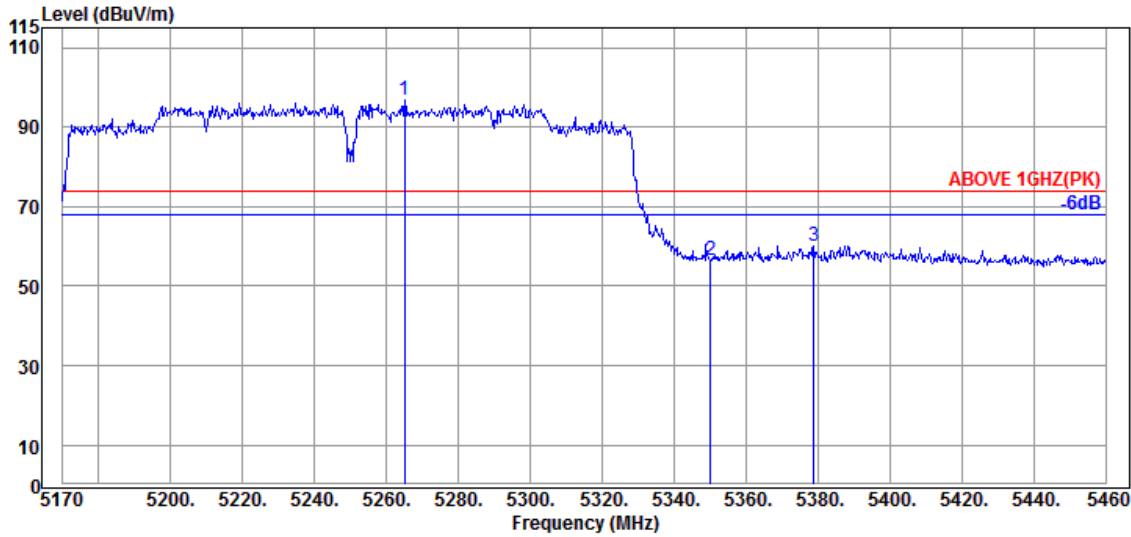

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.120	34.47	8.95	34.29	87.65	96.78	---	---	Peak
5350.090	34.90	8.99	34.26	46.83	56.46	74.00	17.54	Peak
5378.800	34.83	9.01	34.25	50.50	60.09	74.00	13.91	Peak

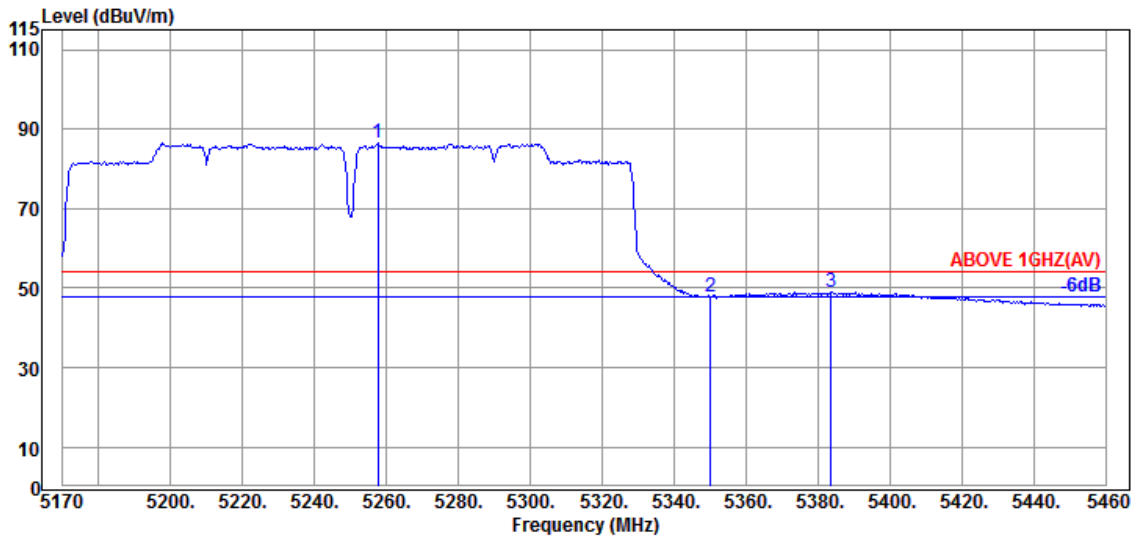


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5257.580	34.50	8.94	34.30	77.34	86.48	---	---	Average
5350.090	34.90	8.99	34.26	38.29	47.92	54.00	6.08	Average
5383.730	34.83	9.01	34.24	39.55	49.15	54.00	4.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

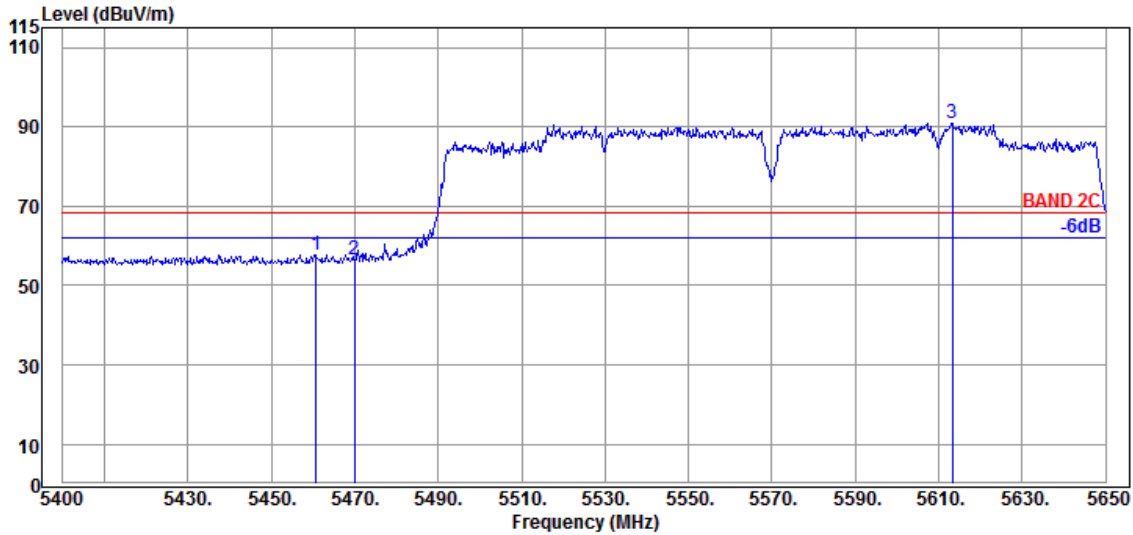

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.750	34.60	9.05	34.21	48.32	57.76	68.20	10.44	Peak
5470.000	34.63	9.06	34.21	46.90	56.38	68.20	11.82	Peak
@ 5613.250	34.43	9.14	34.25	81.64	90.96	---	---	Peak

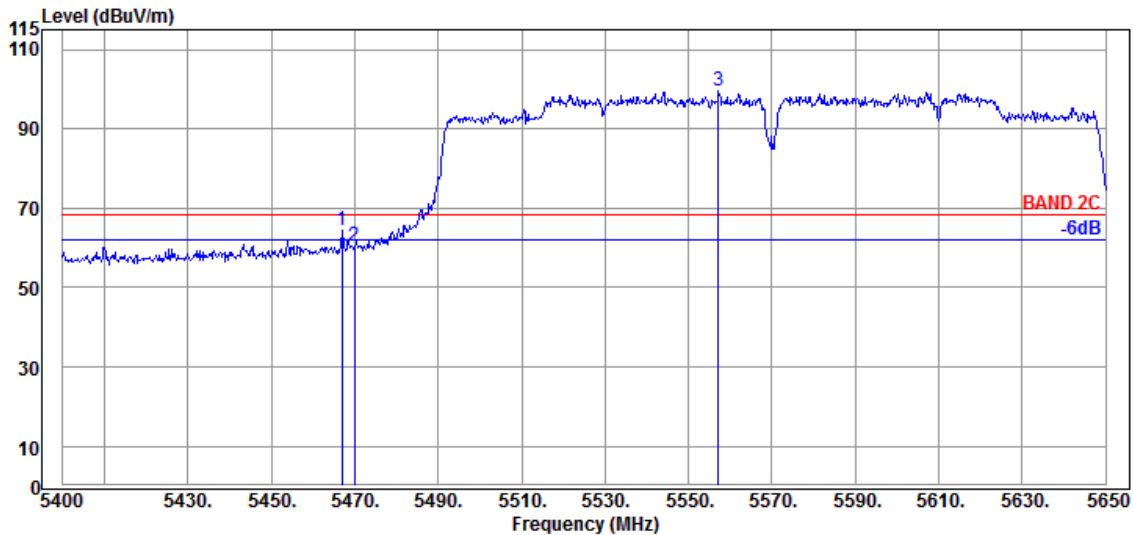


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.63	9.06	34.21	54.95	64.43	68.20	3.77	Peak
5470.000	34.63	9.06	34.21	50.82	60.30	68.20	7.90	Peak
@ 5557.250	34.70	9.10	34.23	90.02	99.59	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

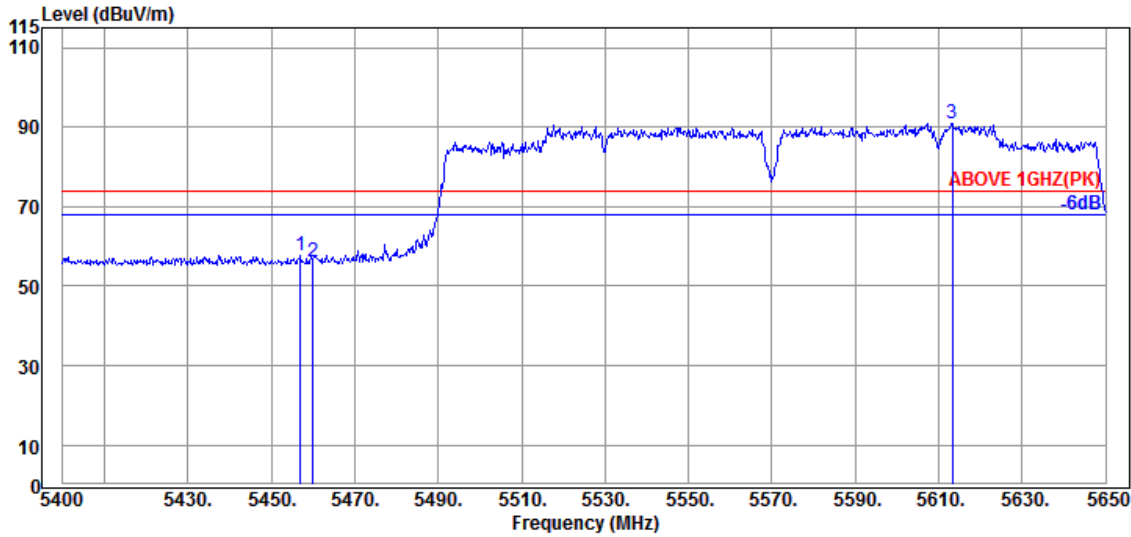

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.000	34.60	9.05	34.21	48.25	57.69	74.00	16.31	Peak
5460.000	34.60	9.05	34.21	46.54	55.98	74.00	18.02	Peak
@ 5613.250	34.43	9.14	34.25	81.64	90.96	---	---	Peak

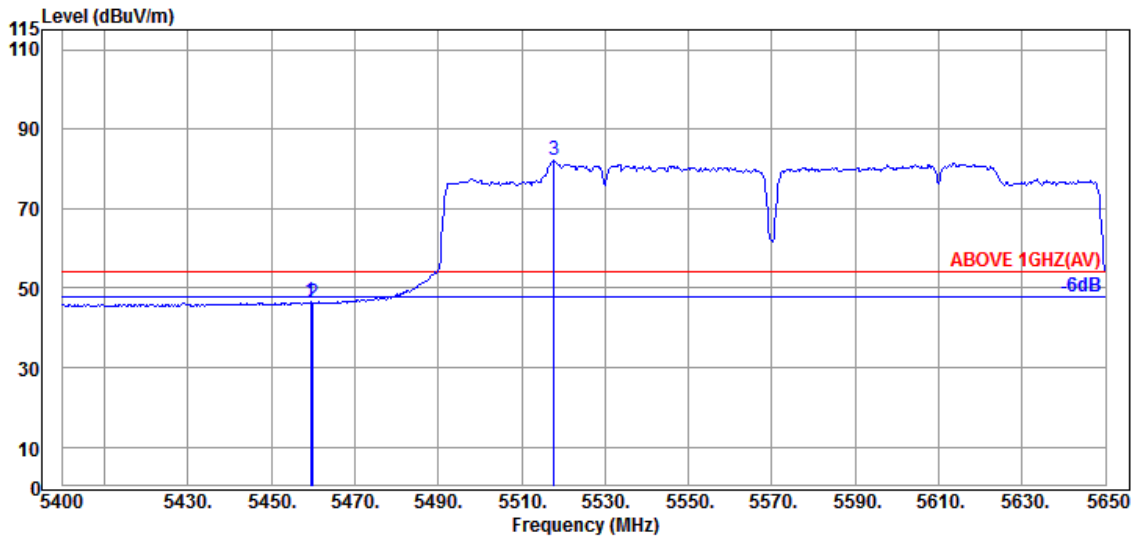


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.500	34.60	9.05	34.21	37.14	46.58	54.00	7.42	Average
5460.000	34.60	9.05	34.21	36.91	46.35	54.00	7.65	Average
@ 5517.750	34.70	9.09	34.21	72.52	82.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

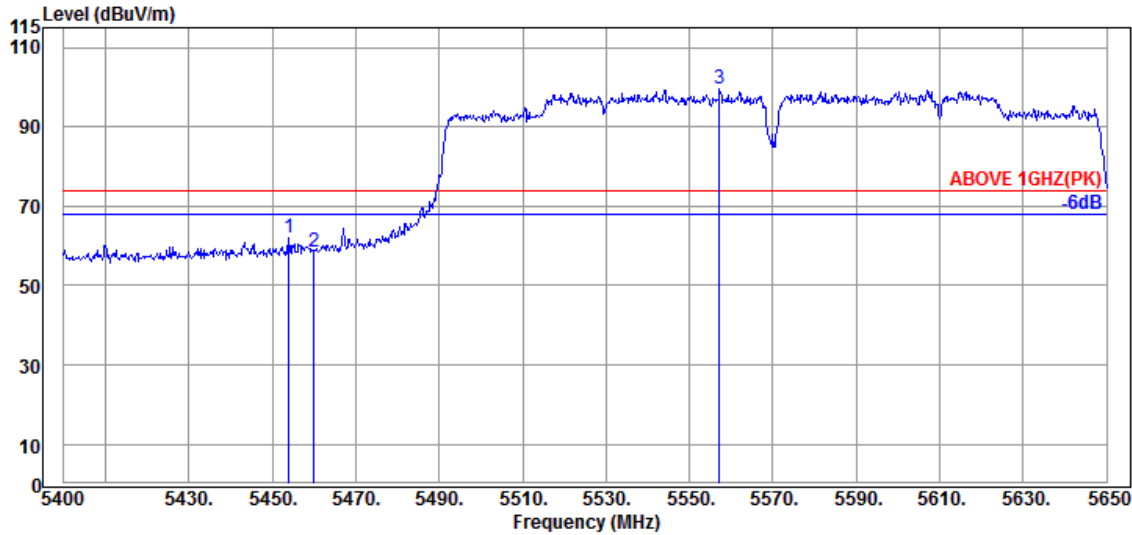

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.000	34.60	9.05	34.21	52.76	62.20	74.00	11.80	Peak
5460.000	34.60	9.05	34.21	49.01	58.45	74.00	15.55	Peak
@ 5557.250	34.70	9.10	34.23	90.02	99.59	---	---	Peak

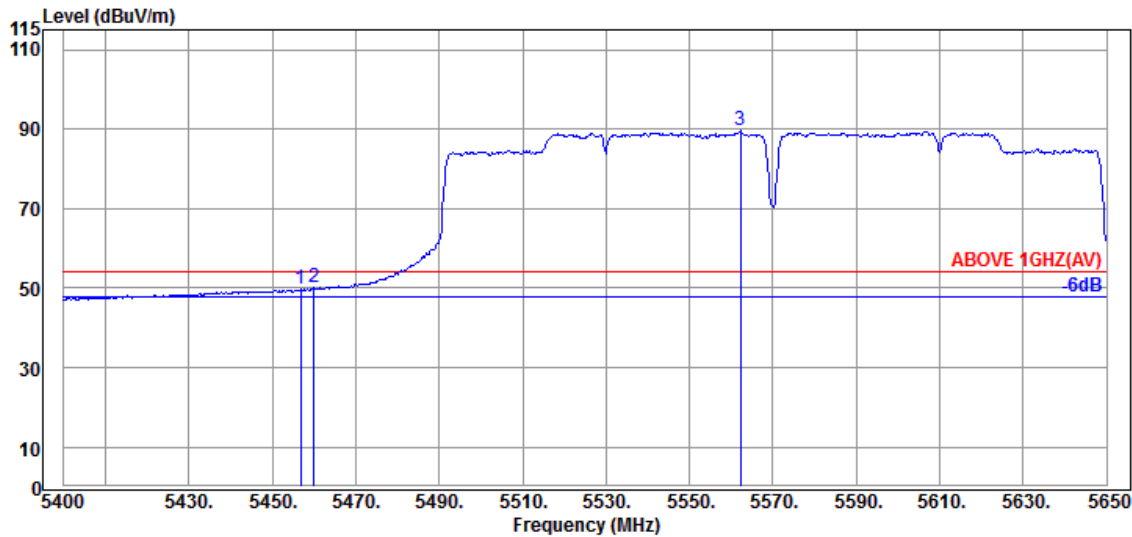


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.750	34.60	9.05	34.21	40.42	49.86	54.00	4.14	Average
5460.000	34.60	9.05	34.21	40.65	50.09	54.00	3.91	Average
@ 5562.250	34.60	9.11	34.23	80.11	89.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

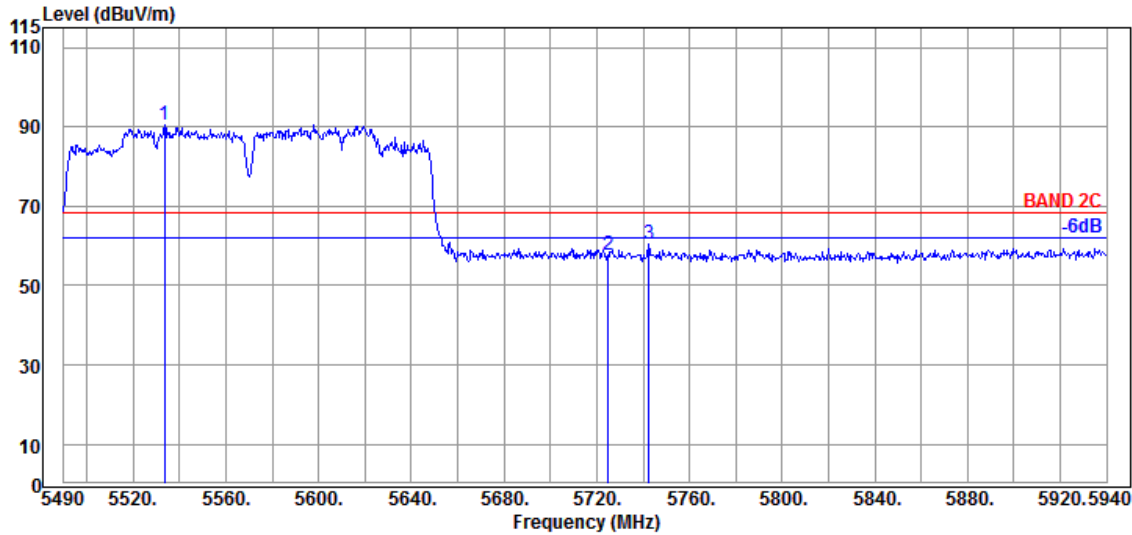

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5533.650	34.70	9.09	34.22	81.10	90.67	---	---	Peak
5724.900	34.90	9.20	34.30	48.09	57.89	68.20	10.31	Peak
5742.450	35.00	9.20	34.31	50.41	60.30	68.20	7.90	Peak

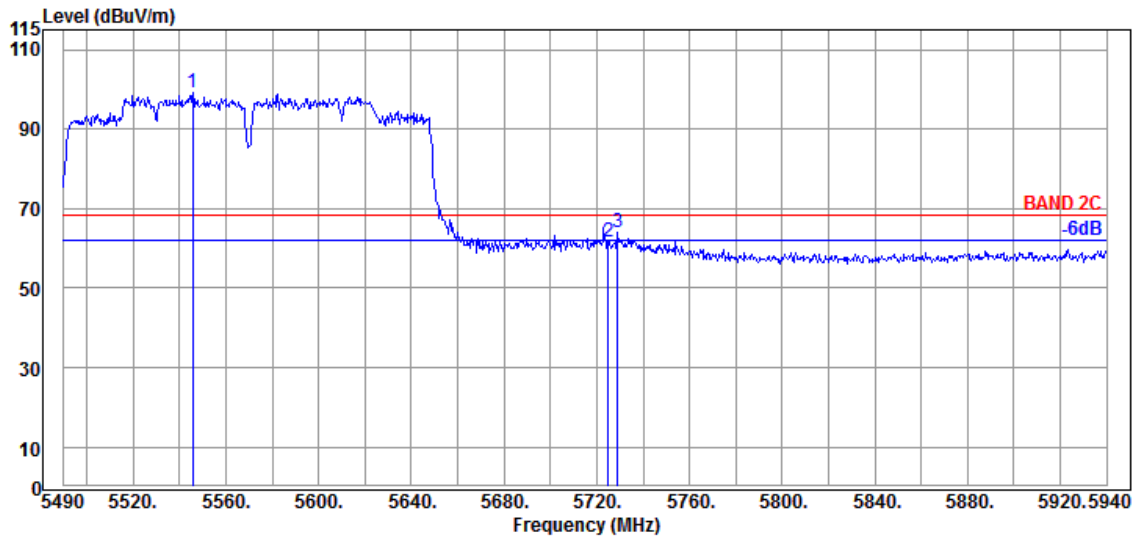


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5545.800	34.70	9.10	34.23	89.45	99.02	---	---	Peak
5724.900	34.90	9.20	34.30	51.87	61.67	68.20	6.53	Peak
5728.950	34.90	9.20	34.31	54.23	64.02	68.20	4.18	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

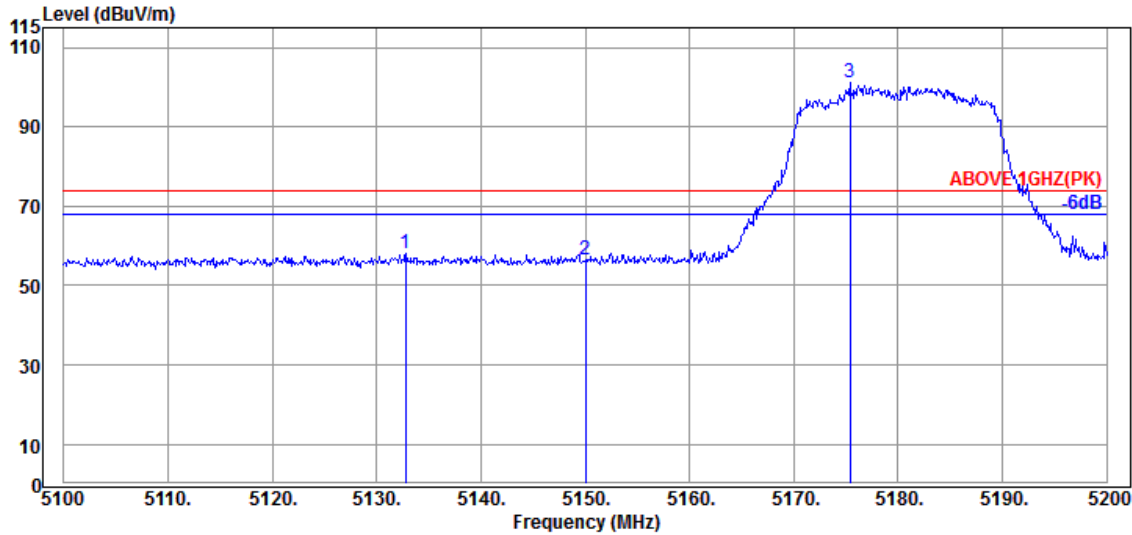

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.800	34.40	8.88	34.34	49.13	58.07	74.00	15.93	Peak
5150.000	34.50	8.88	34.34	47.39	56.43	74.00	17.57	Peak
@ 5175.400	34.63	8.90	34.32	92.00	101.21	---	---	Peak

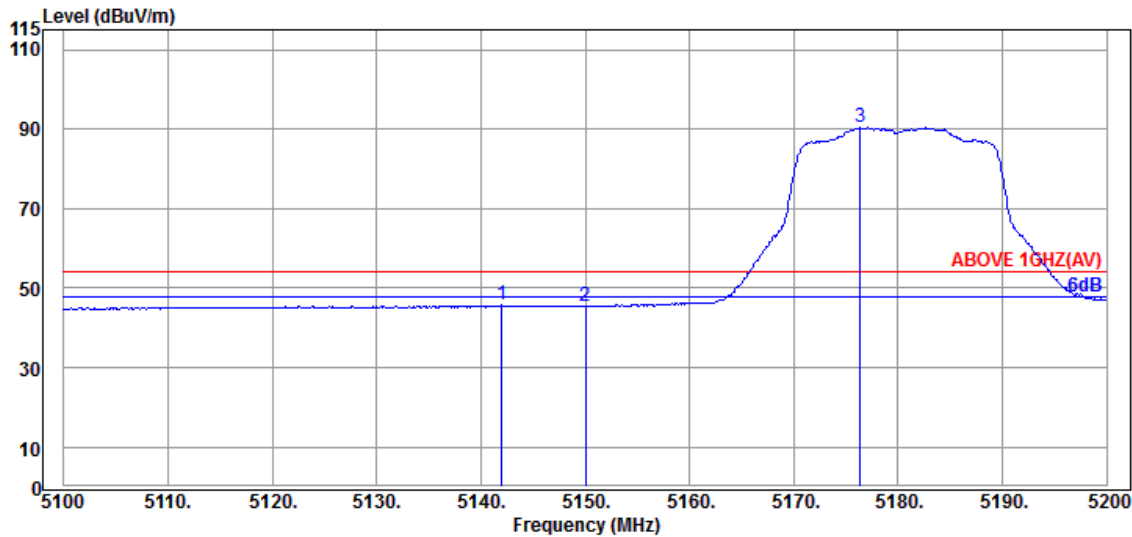


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.000	34.50	8.88	34.34	36.63	45.67	54.00	8.33	Average
5150.000	34.50	8.88	34.34	36.30	45.34	54.00	8.66	Average
@ 5176.400	34.63	8.90	34.32	81.23	90.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

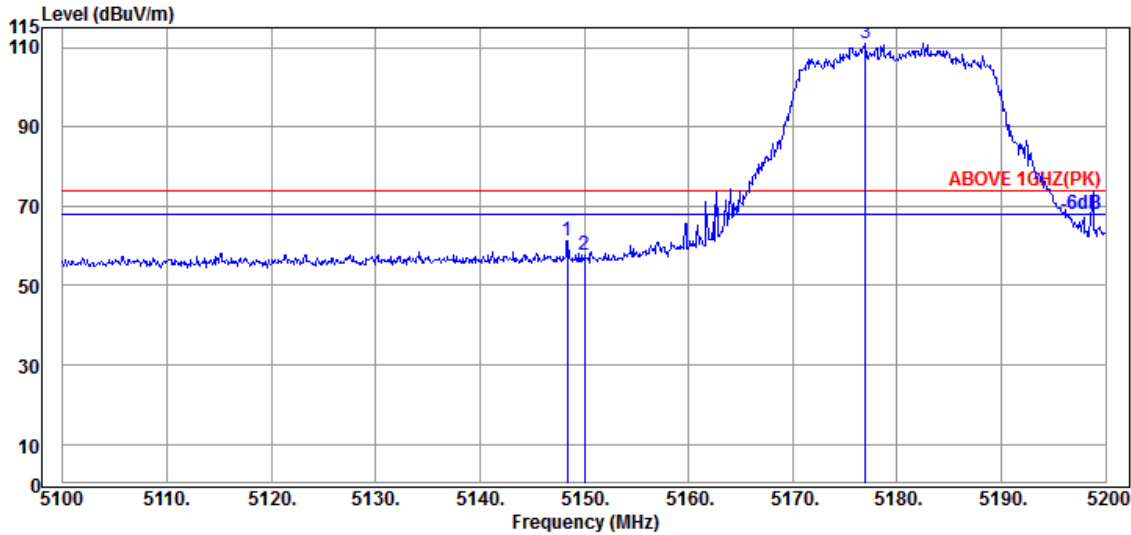

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	34.50	8.88	34.34	52.20	61.24	74.00	12.76	Peak
5150.000	34.50	8.88	34.34	48.62	57.66	74.00	16.34	Peak
@ 5177.000	34.63	8.90	34.32	101.84	111.05	---	---	Peak

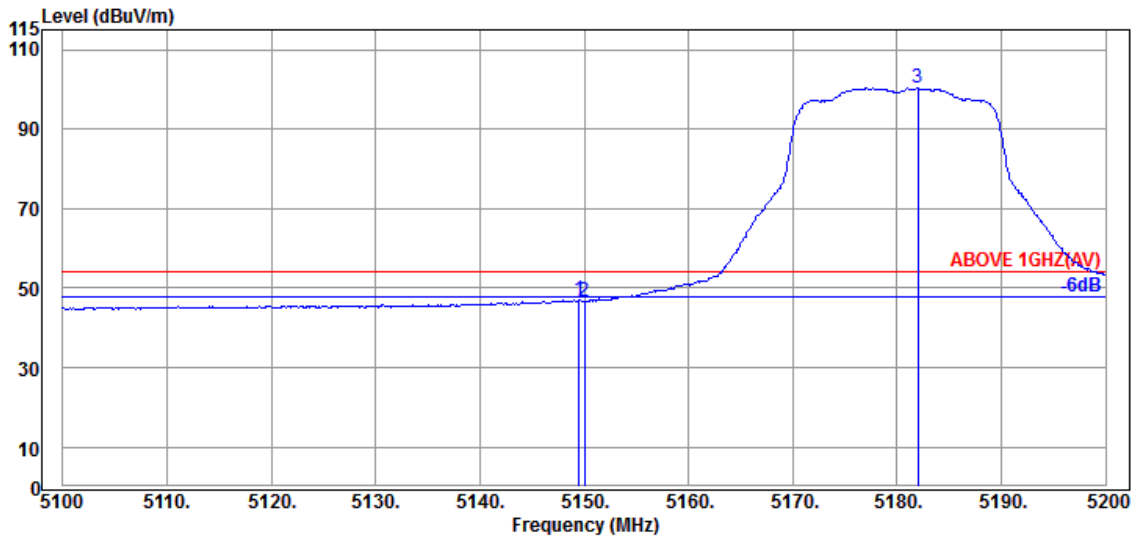


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.50	8.88	34.34	37.94	46.98	54.00	7.02	Average
5150.000	34.50	8.88	34.34	37.55	46.59	54.00	7.41	Average
@ 5182.000	34.63	8.90	34.32	91.18	100.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

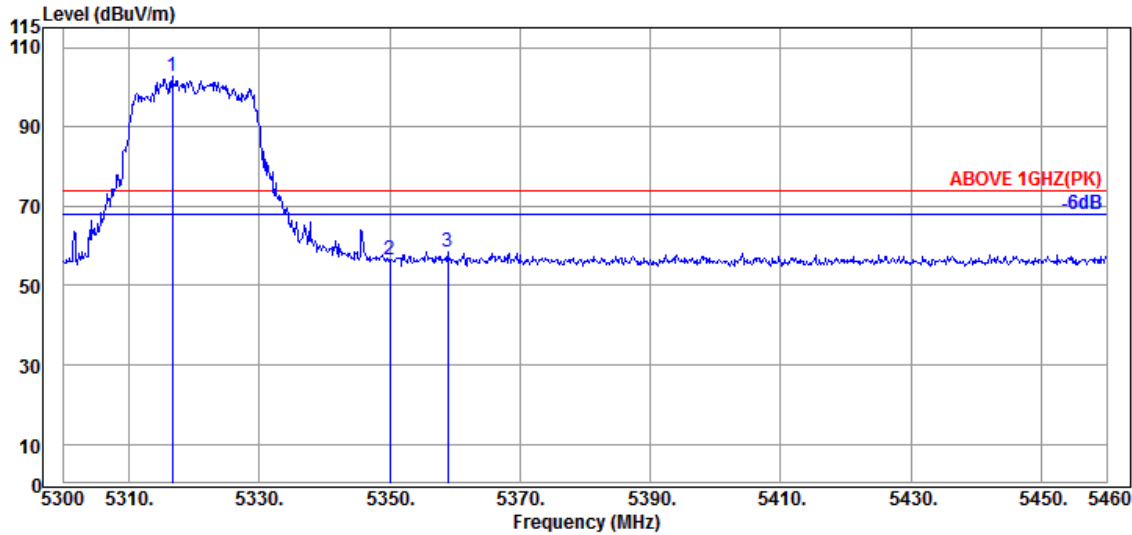

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.640	34.57	8.98	34.27	93.66	102.94	---	---	Peak
5350.080	34.90	8.99	34.26	47.02	56.65	74.00	17.35	Peak
5358.880	34.87	9.00	34.26	49.03	58.64	74.00	15.36	Peak

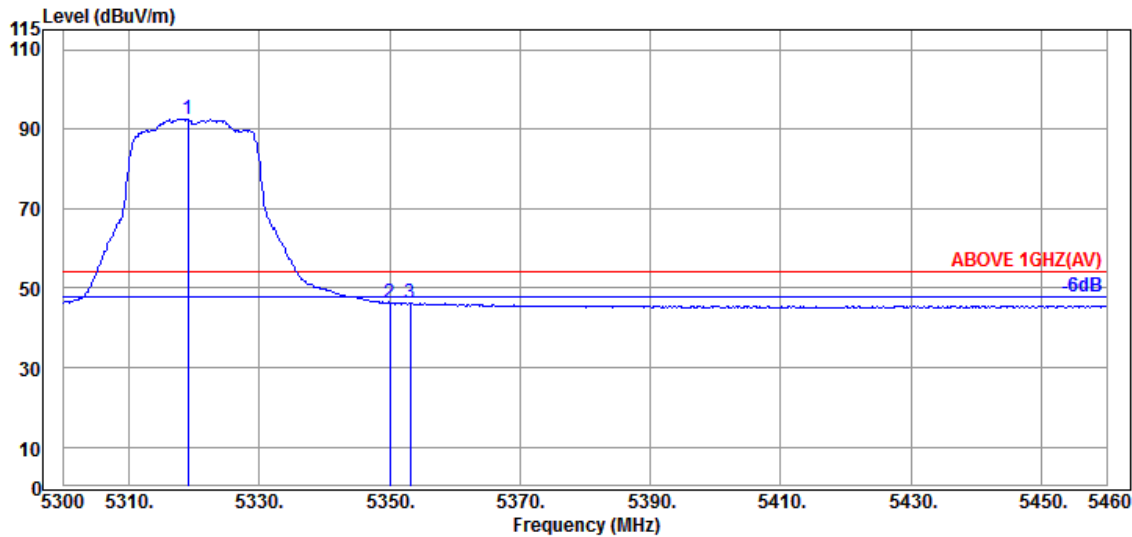


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.040	34.57	8.98	34.27	83.29	92.57	---	---	Average
5350.080	34.90	8.99	34.26	36.71	46.34	54.00	7.66	Average
5353.120	34.90	8.99	34.26	36.74	46.37	54.00	7.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

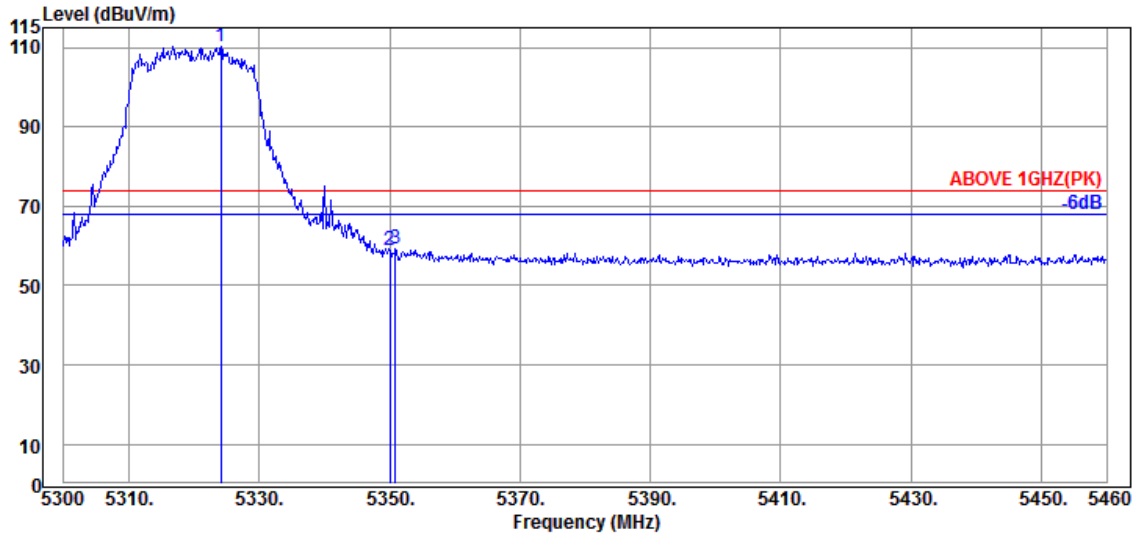

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.160	34.73	8.99	34.27	100.65	110.10	---	---	Peak
5350.080	34.90	8.99	34.26	49.33	58.96	74.00	15.04	Peak
5350.880	34.90	8.99	34.26	49.76	59.39	74.00	14.61	Peak

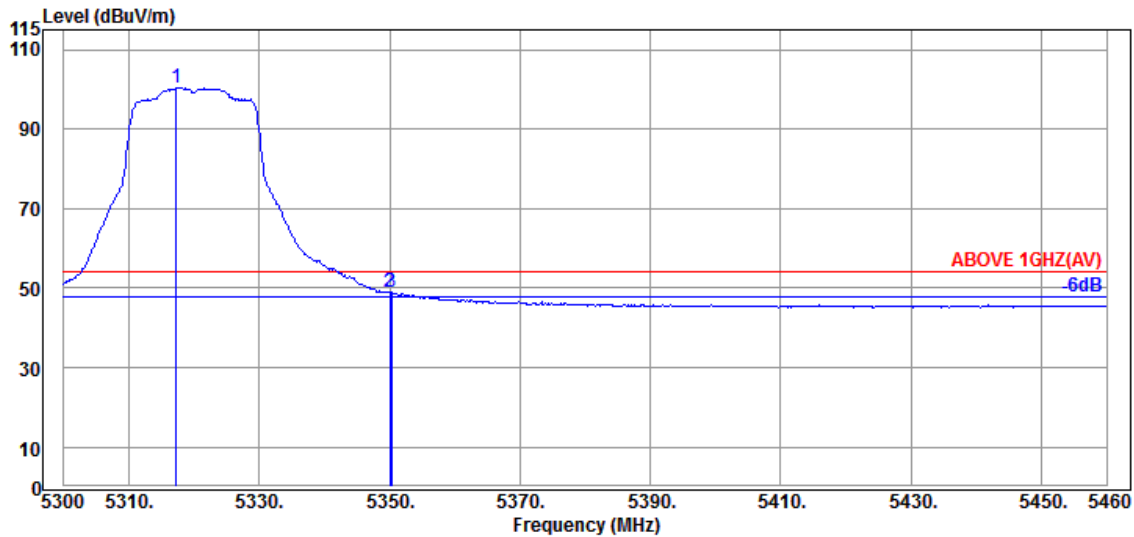


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.280	34.57	8.98	34.27	91.18	100.46	---	---	Average
5350.080	34.90	8.99	34.26	39.32	48.95	54.00	5.05	Average
5350.240	34.90	8.99	34.26	39.30	48.93	54.00	5.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

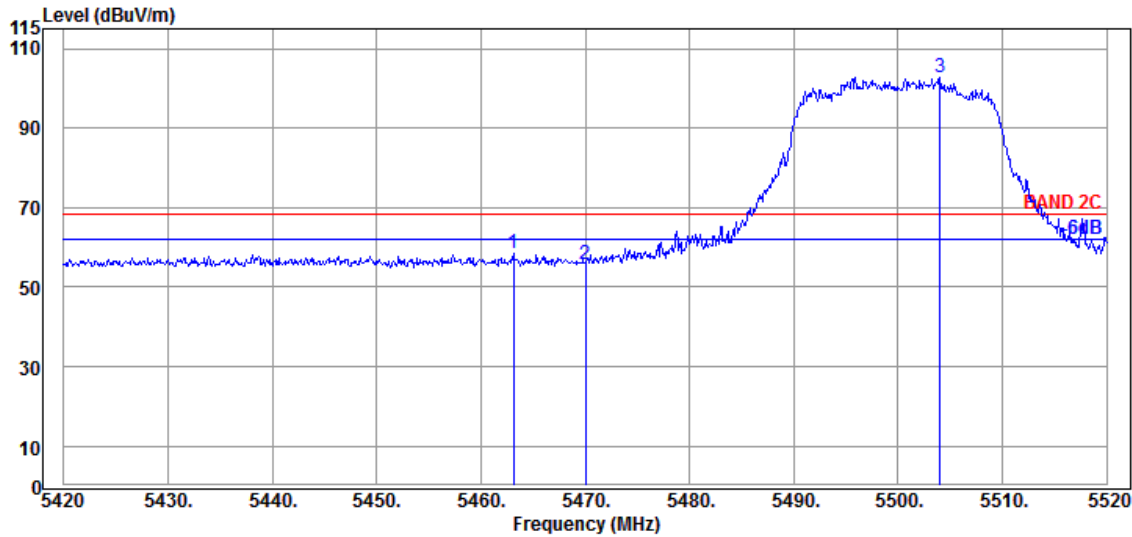

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.60	9.05	34.21	48.86	58.30	68.20	9.90	Peak
5470.000	34.63	9.06	34.21	46.23	55.71	68.20	12.49	Peak
@ 5504.000	34.70	9.08	34.20	93.09	102.67	---	---	Peak

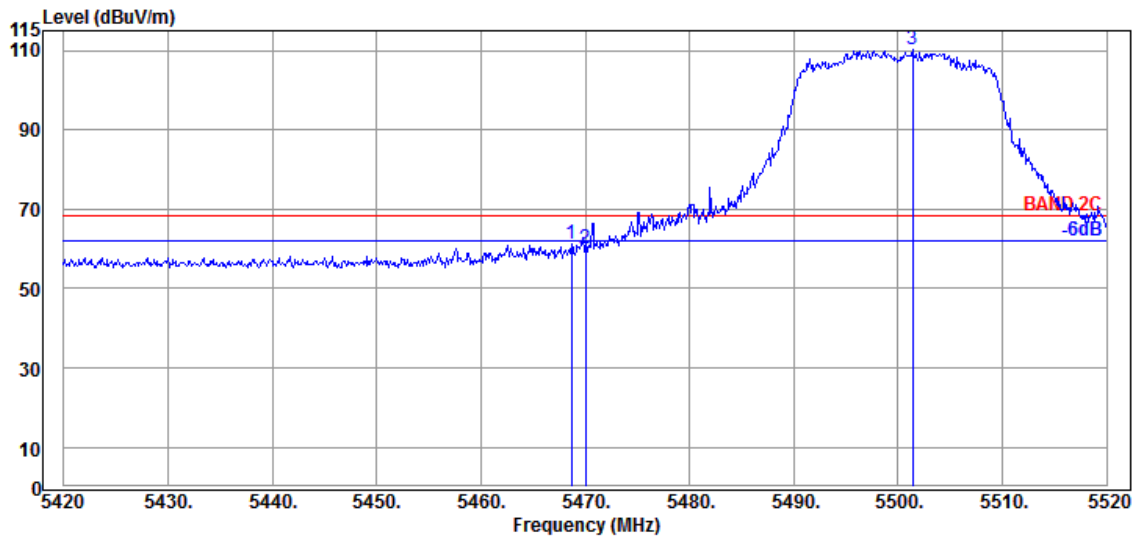


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.63	9.06	34.21	51.85	61.33	68.20	6.87	Peak
5470.000	34.63	9.06	34.21	50.71	60.19	68.20	8.01	Peak
@ 5501.400	34.70	9.08	34.20	100.57	110.15	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

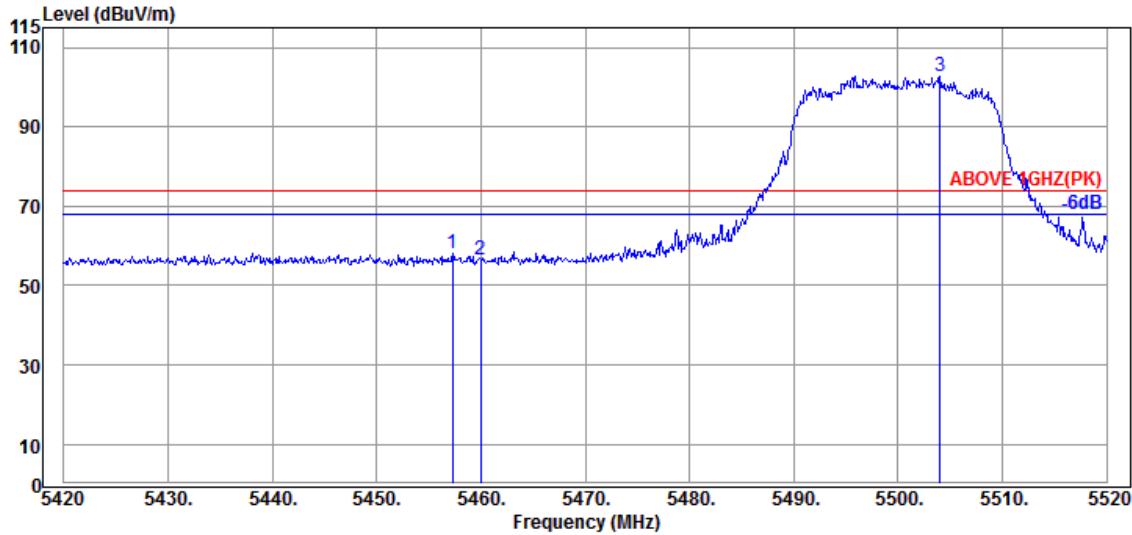

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.300	34.60	9.05	34.21	48.78	58.22	74.00	15.78	Peak
5460.000	34.60	9.05	34.21	47.05	56.49	74.00	17.51	Peak
@ 5504.000	34.70	9.08	34.20	93.09	102.67	---	---	Peak

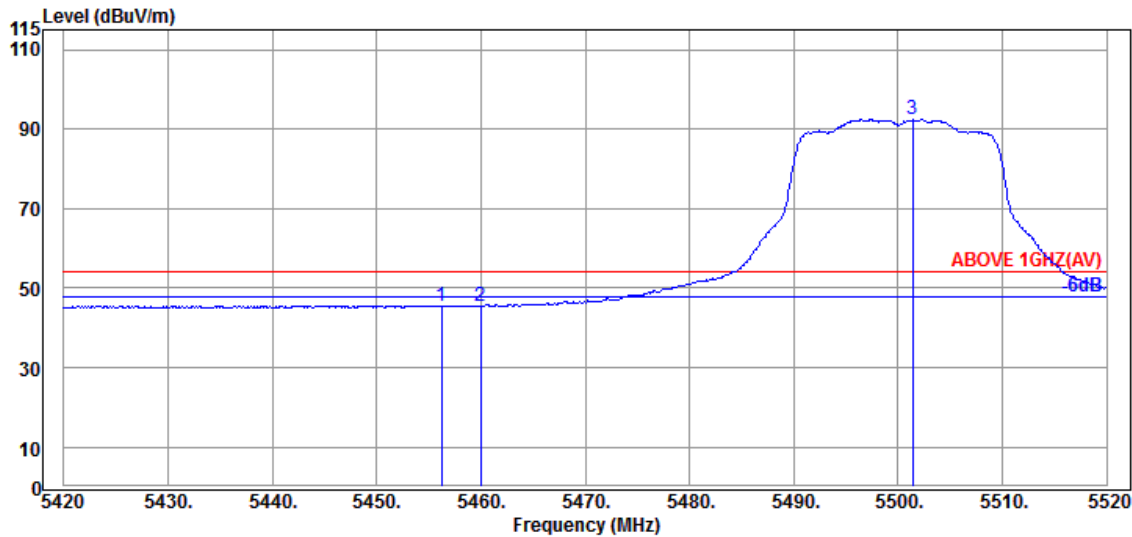


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.60	9.05	34.21	36.19	45.63	54.00	8.37	Average
5460.000	34.60	9.05	34.21	36.03	45.47	54.00	8.53	Average
@ 5501.400	34.70	9.08	34.20	82.89	92.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

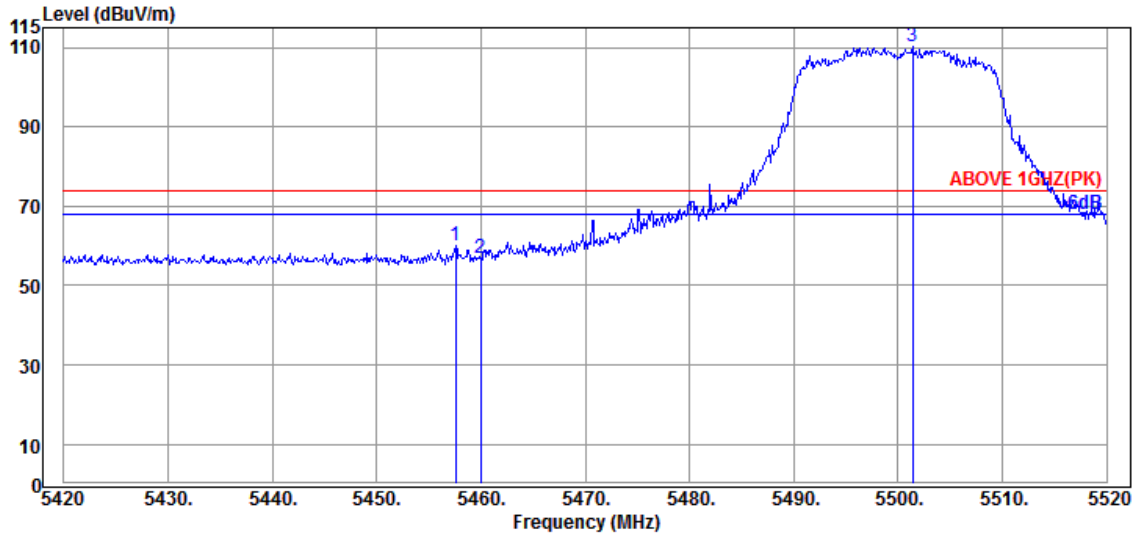

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.600	34.60	9.05	34.21	50.50	59.94	74.00	14.06	Peak
5460.000	34.60	9.05	34.21	47.64	57.08	74.00	16.92	Peak
@ 5501.400	34.70	9.08	34.20	100.57	110.15	---	---	Peak

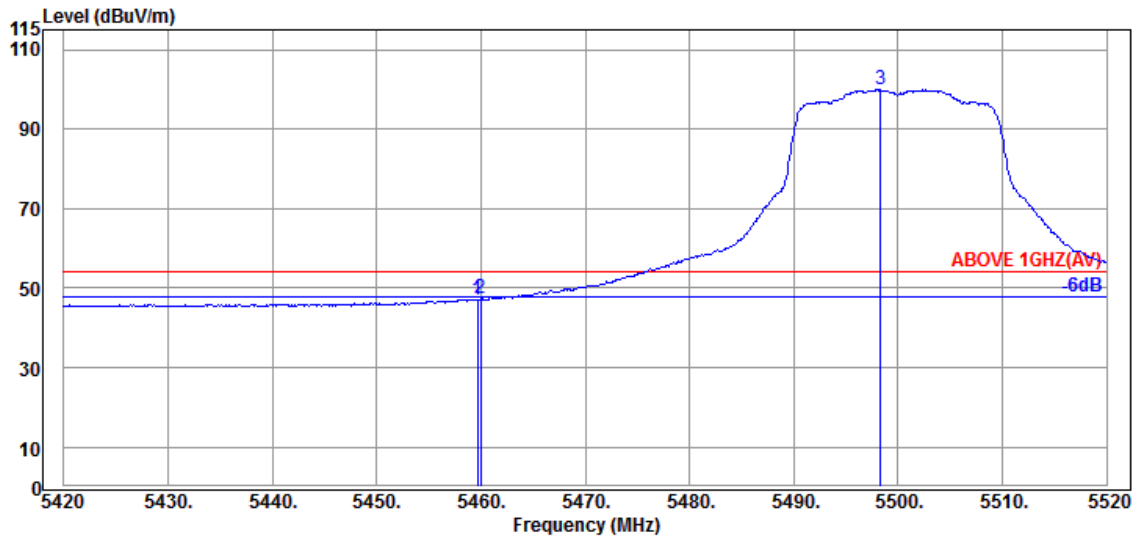


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.700	34.60	9.05	34.21	37.69	47.13	54.00	6.87	Average
5460.000	34.60	9.05	34.21	37.84	47.28	54.00	6.72	Average
@ 5498.300	34.70	9.08	34.20	90.38	99.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

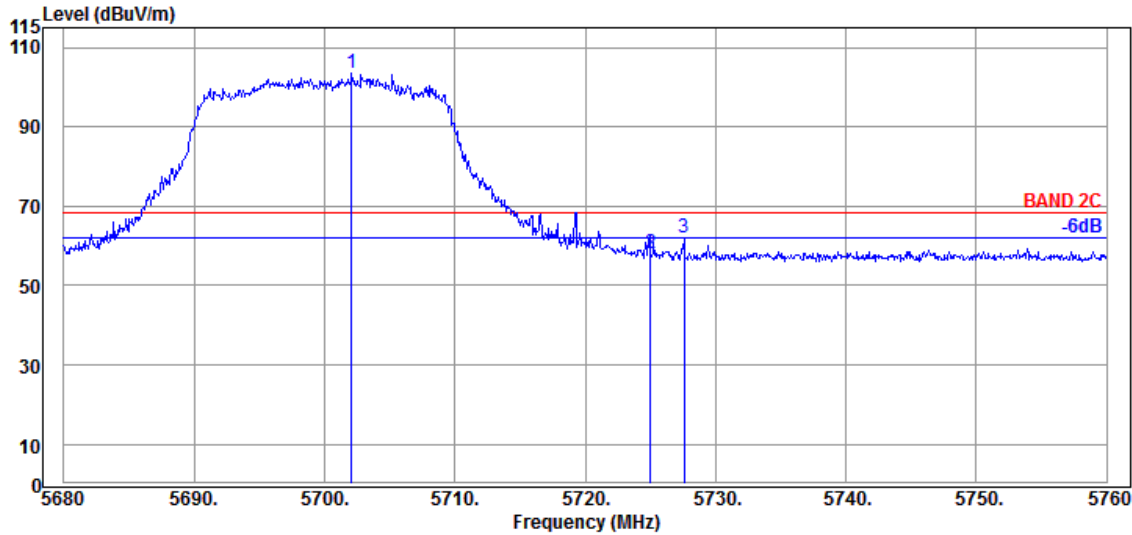

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.080	34.70	9.18	34.29	93.81	103.40	---	---	Peak
5725.040	34.90	9.20	34.30	48.38	58.18	68.20	10.02	Peak
5727.600	34.90	9.20	34.31	52.13	61.92	68.20	6.28	Peak

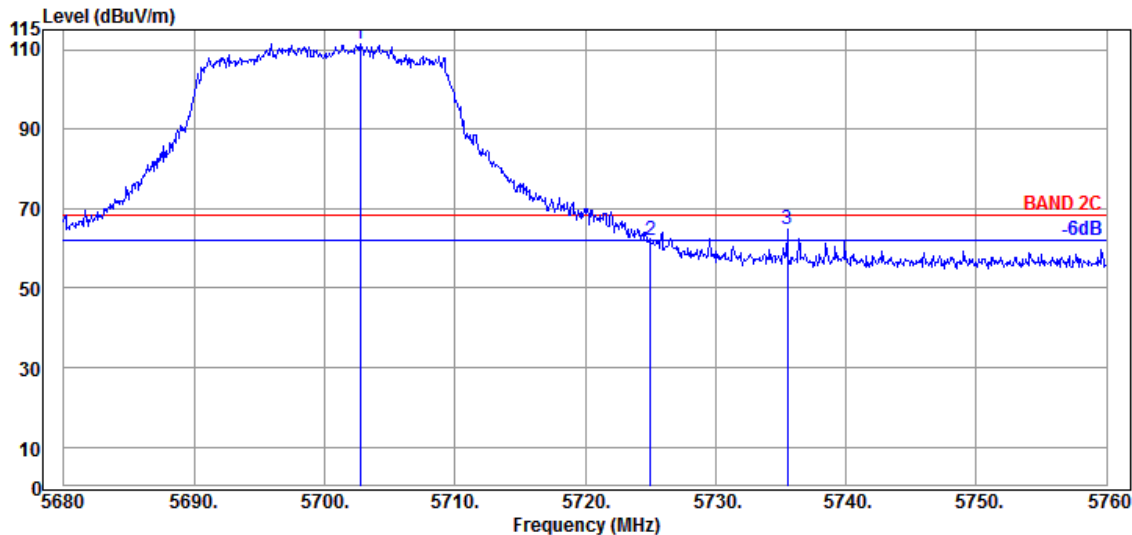


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.720	34.70	9.18	34.29	101.78	111.37	---	---	Peak
5725.040	34.90	9.20	34.30	52.26	62.06	68.20	6.14	Peak
5735.520	34.90	9.20	34.31	55.00	64.79	68.20	3.41	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

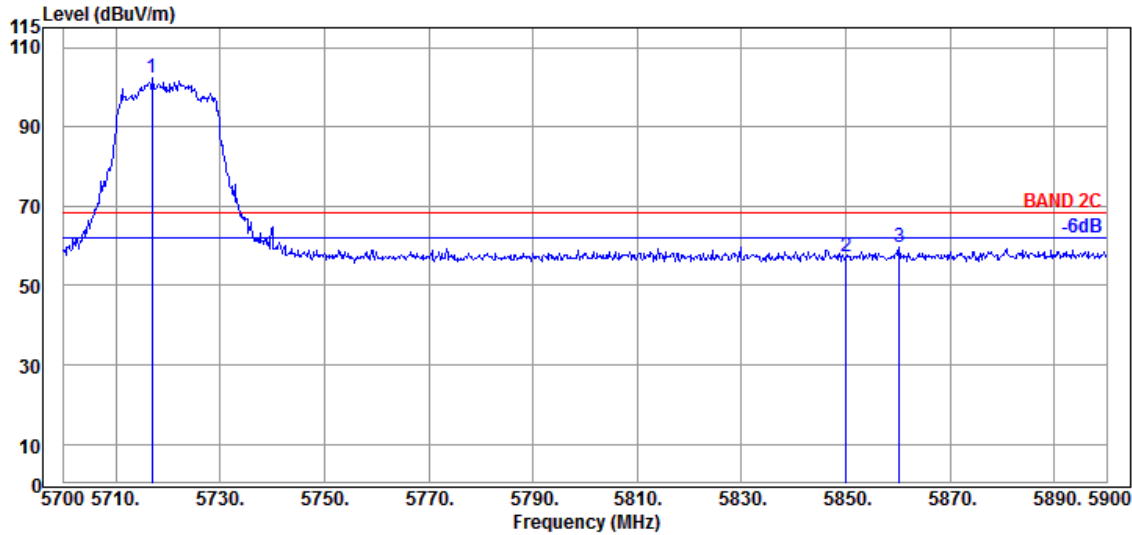

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.000	34.80	9.19	34.30	92.68	102.37	---	---	Peak
5850.000	35.40	9.25	34.36	47.15	57.44	68.20	10.76	Peak
5860.200	35.53	9.26	34.37	49.39	59.81	68.20	8.39	Peak

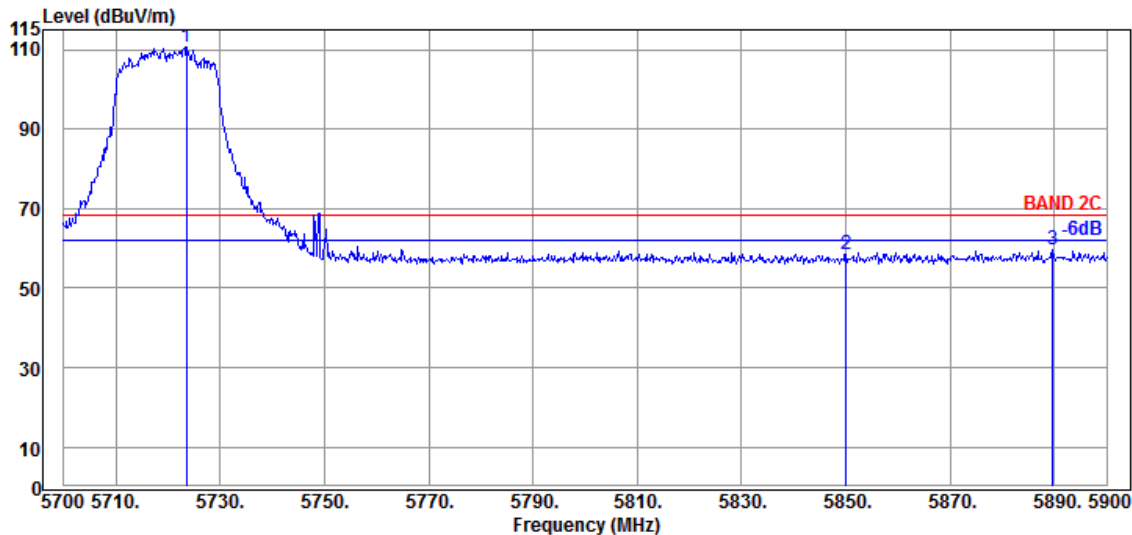


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.600	34.90	9.20	34.30	100.75	110.55	---	---	Peak
5850.000	35.40	9.25	34.36	48.14	58.43	68.20	9.77	Peak
5889.600	35.67	9.27	34.38	49.15	59.71	68.20	8.49	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

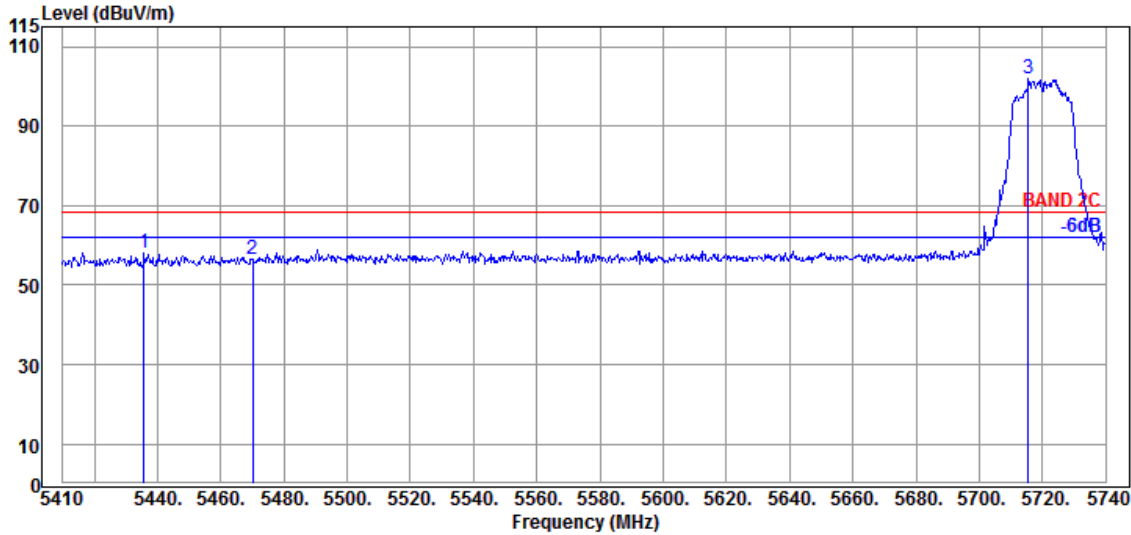

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5435.740	34.65	9.04	34.22	48.74	58.21	68.20	9.99	Peak
5470.060	34.63	9.06	34.21	46.97	56.45	68.20	11.75	Peak
5715.580	34.80	9.19	34.30	92.20	101.89	---	---	Peak

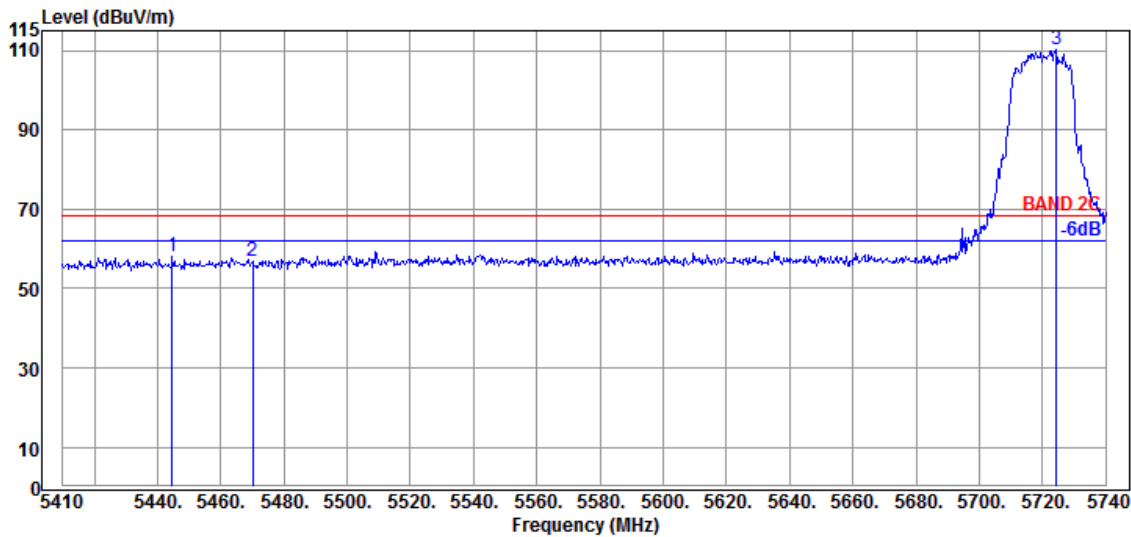


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5444.650	34.65	9.04	34.22	48.51	57.98	68.20	10.22	Peak
5470.060	34.63	9.06	34.21	47.42	56.90	68.20	11.30	Peak
5724.490	34.90	9.20	34.30	100.30	110.10	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

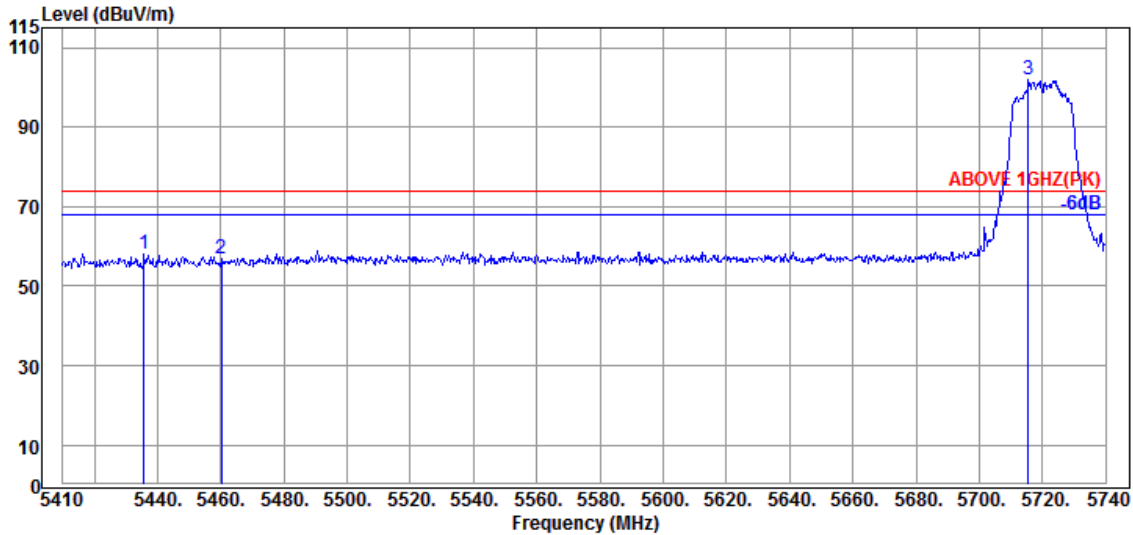

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.740	34.65	9.04	34.22	48.74	58.21	74.00	15.79	Peak
5460.160	34.60	9.05	34.21	47.63	57.07	74.00	16.93	Peak
@ 5715.580	34.80	9.19	34.30	92.20	101.89	---	---	Peak

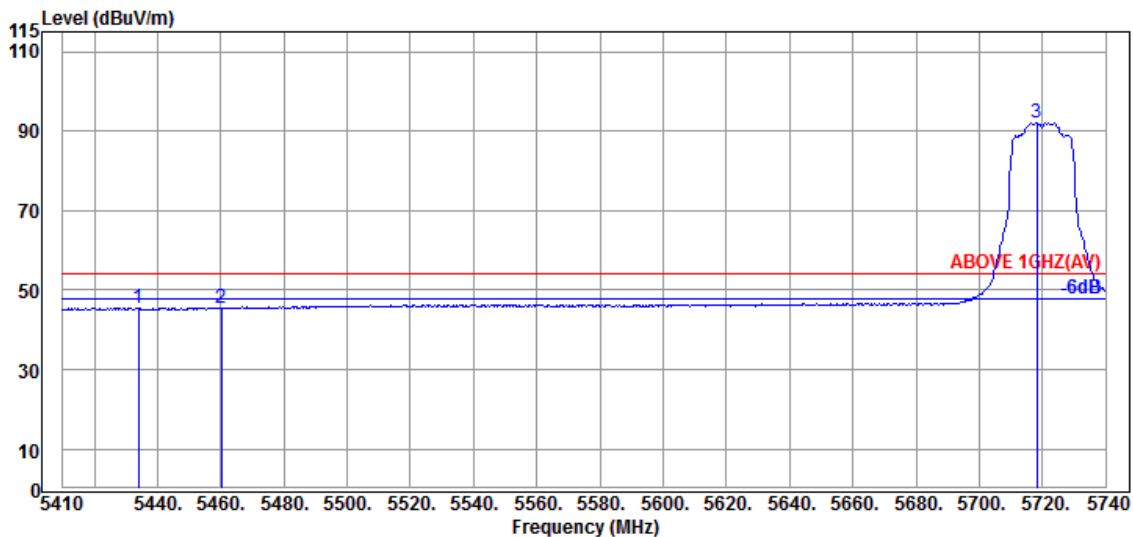


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.090	34.65	9.04	34.22	36.04	45.51	54.00	8.49	Average
5460.160	34.60	9.05	34.21	35.86	45.30	54.00	8.70	Average
@ 5718.220	34.80	9.19	34.30	82.43	92.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

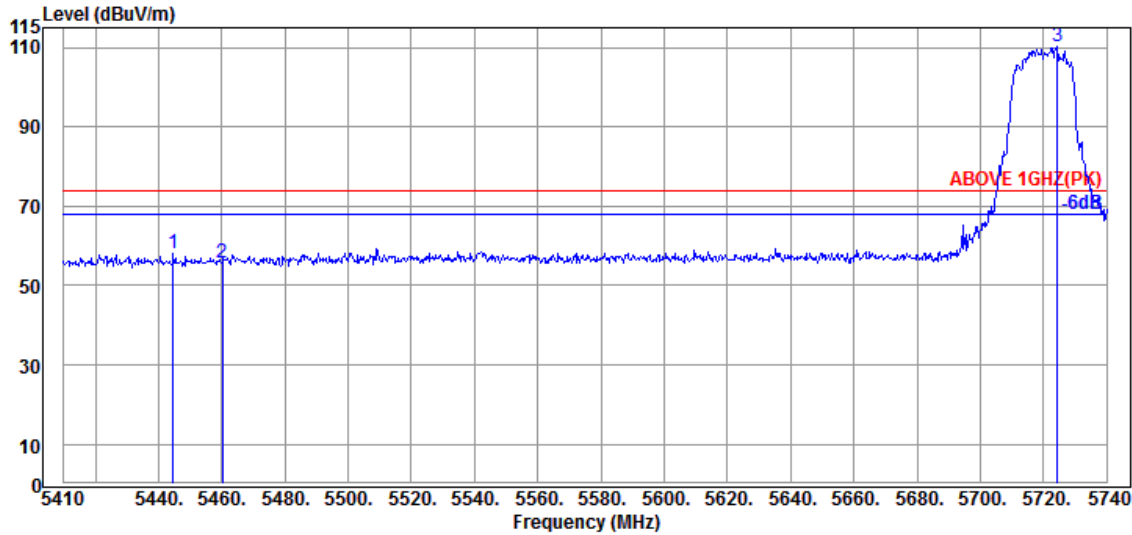

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.650	34.65	9.04	34.22	48.51	57.98	74.00	16.02	Peak
5460.160	34.60	9.05	34.21	46.09	55.53	74.00	18.47	Peak
@ 5724.490	34.90	9.20	34.30	100.30	110.10	---	---	Peak

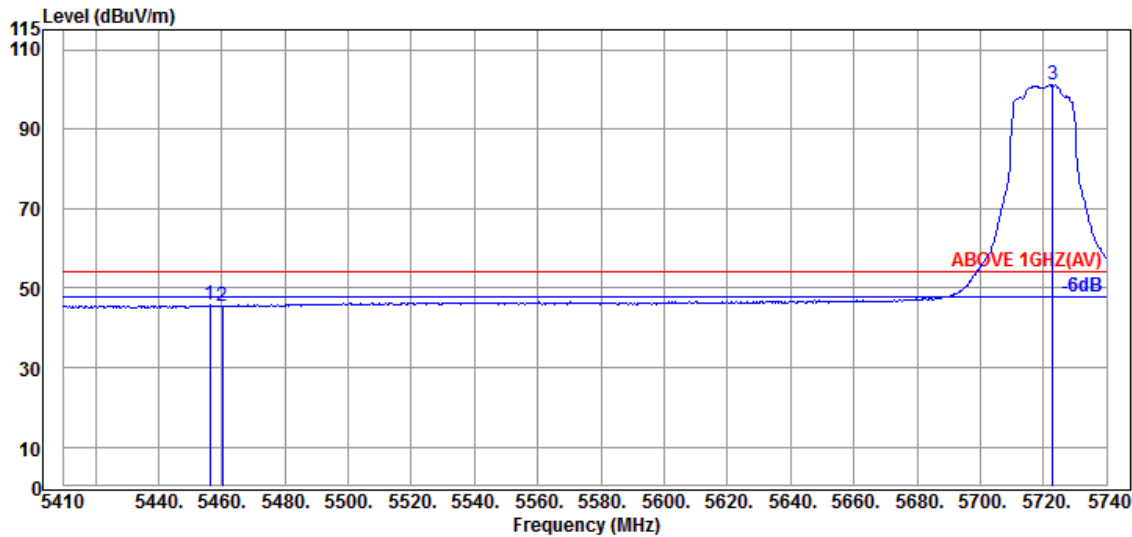


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.60	9.05	34.21	36.23	45.67	54.00	8.33	Average
5460.160	34.60	9.05	34.21	36.00	45.44	54.00	8.56	Average
@ 5722.840	34.90	9.20	34.30	91.37	101.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

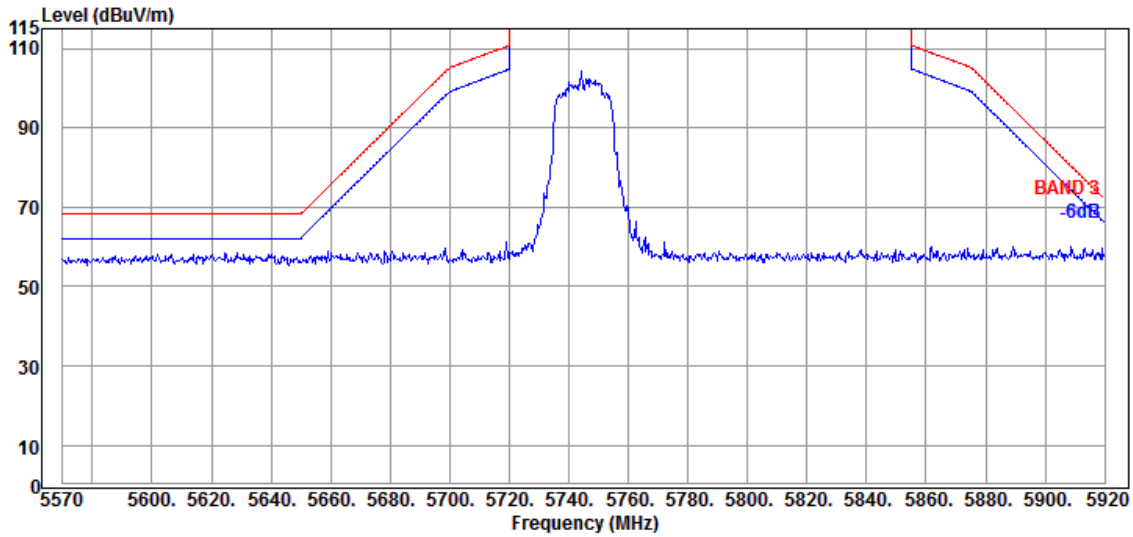


Antenna at Vertical Polarization

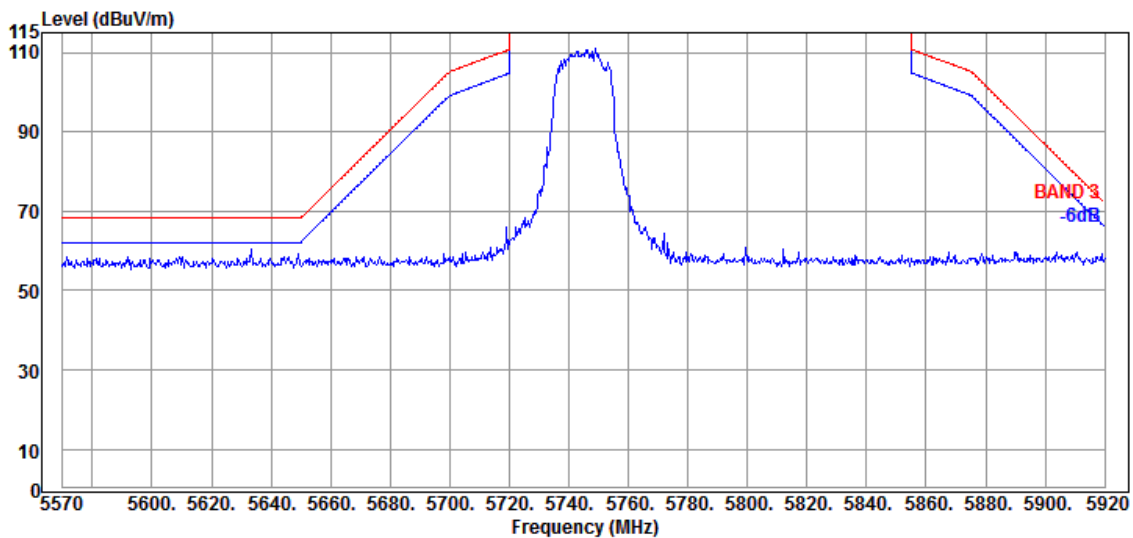


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

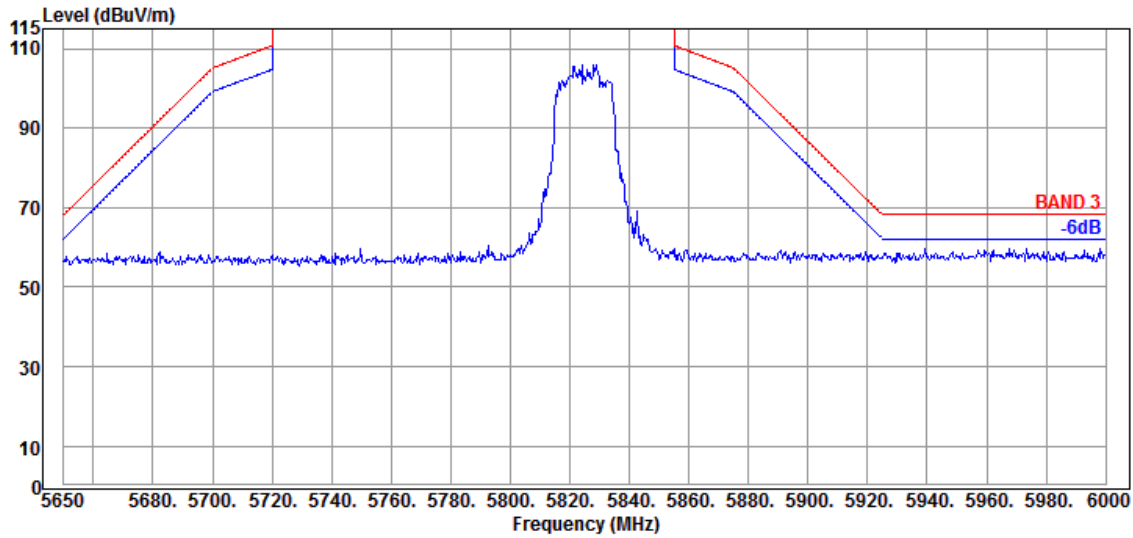

Antenna at Vertical Polarization

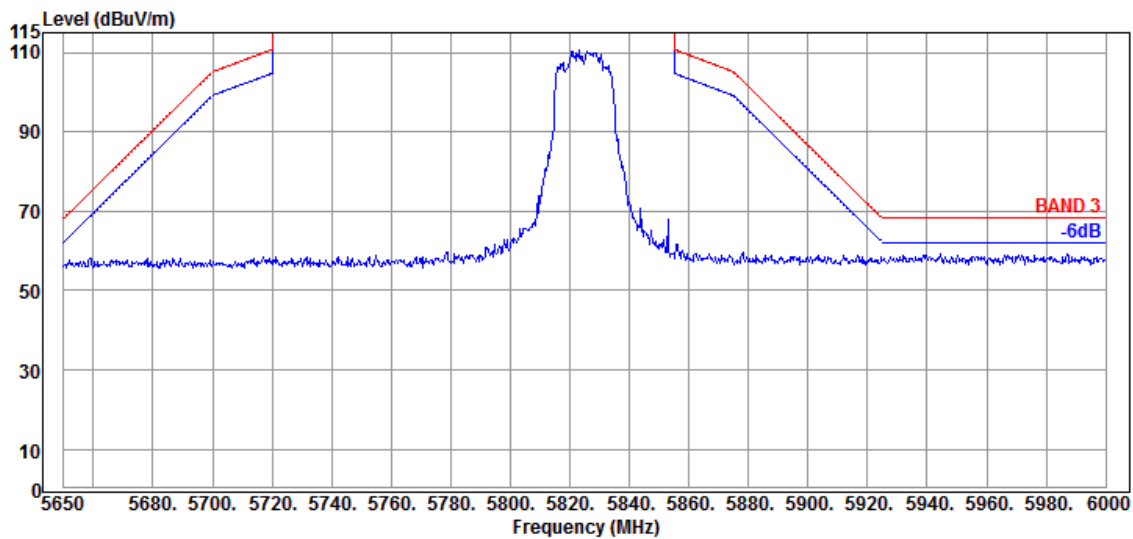


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

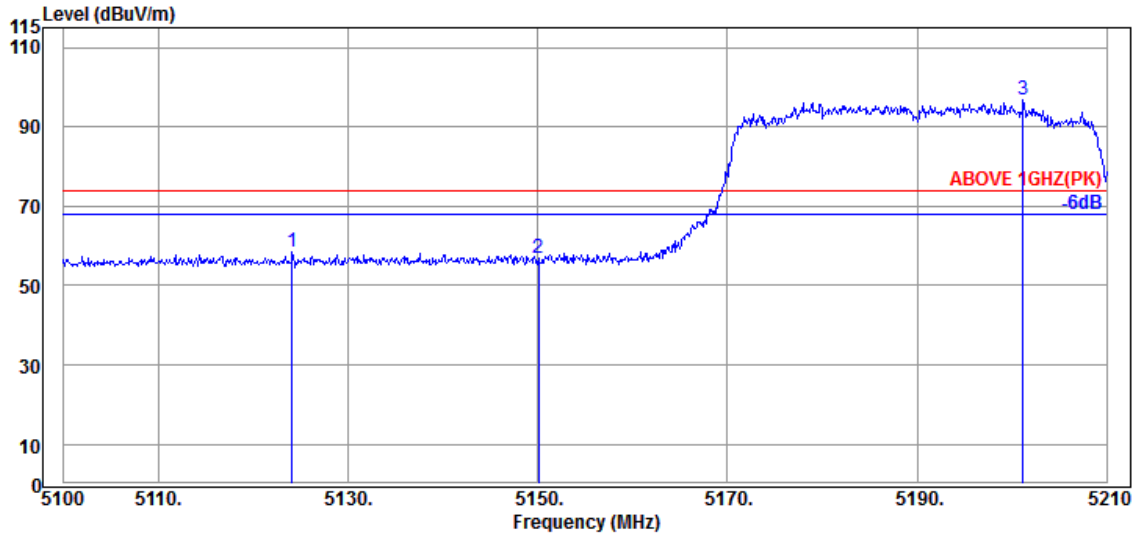

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.090	34.30	8.87	34.34	49.47	58.30	74.00	15.70	Peak
5150.050	34.50	8.88	34.34	47.87	56.91	74.00	17.09	Peak
@ 5201.200	34.70	8.91	34.32	87.47	96.76	---	---	Peak

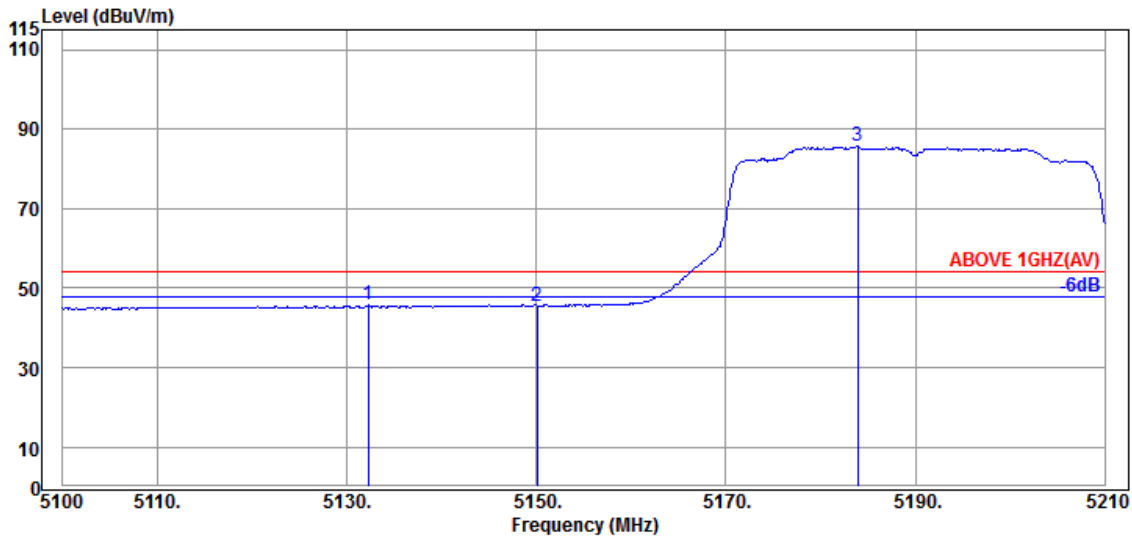


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.230	34.40	8.88	34.34	36.78	45.72	54.00	8.28	Average
5150.050	34.50	8.88	34.34	36.55	45.59	54.00	8.41	Average
@ 5183.930	34.63	8.90	34.32	76.40	85.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

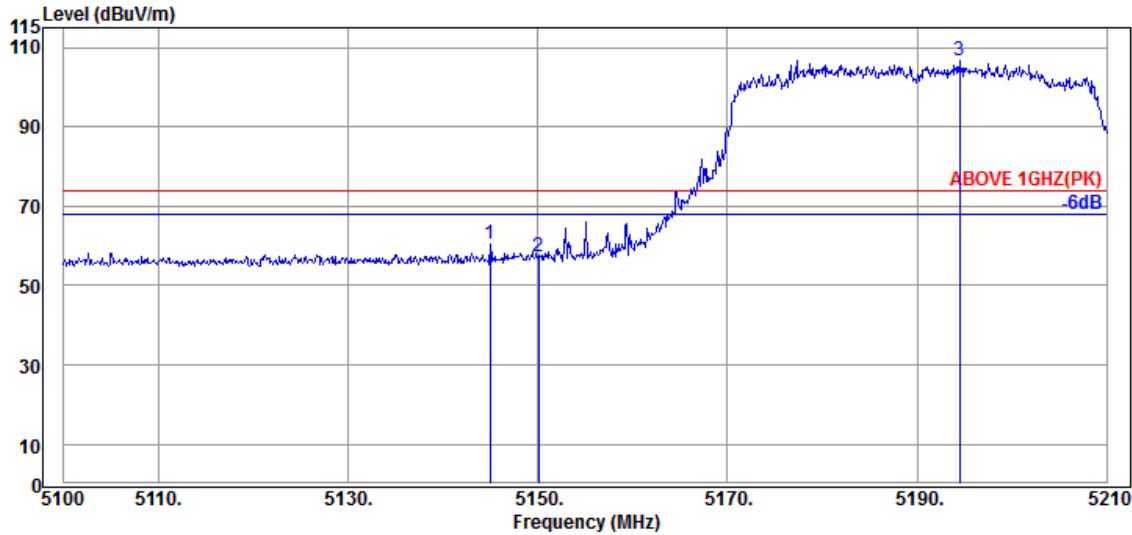

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.990	34.50	8.88	34.34	51.60	60.64	74.00	13.36	Peak
5150.050	34.50	8.88	34.34	48.27	57.31	74.00	16.69	Peak
@ 5194.490	34.70	8.91	34.32	97.46	106.75	---	---	Peak

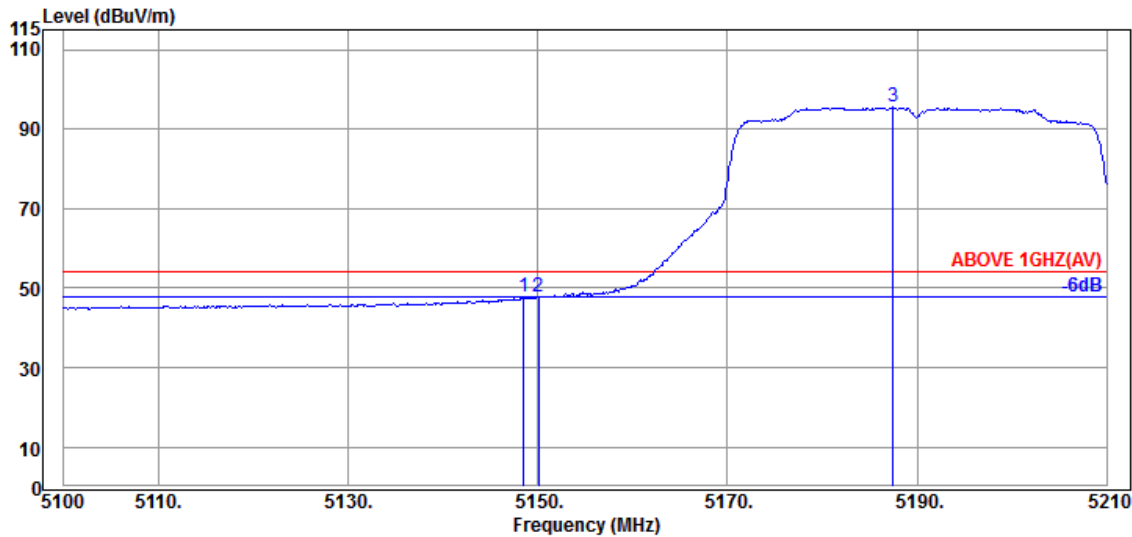


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	34.50	8.88	34.34	38.60	47.64	54.00	6.36	Average
5150.050	34.50	8.88	34.34	38.60	47.64	54.00	6.36	Average
@ 5187.450	34.70	8.91	34.32	86.19	95.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

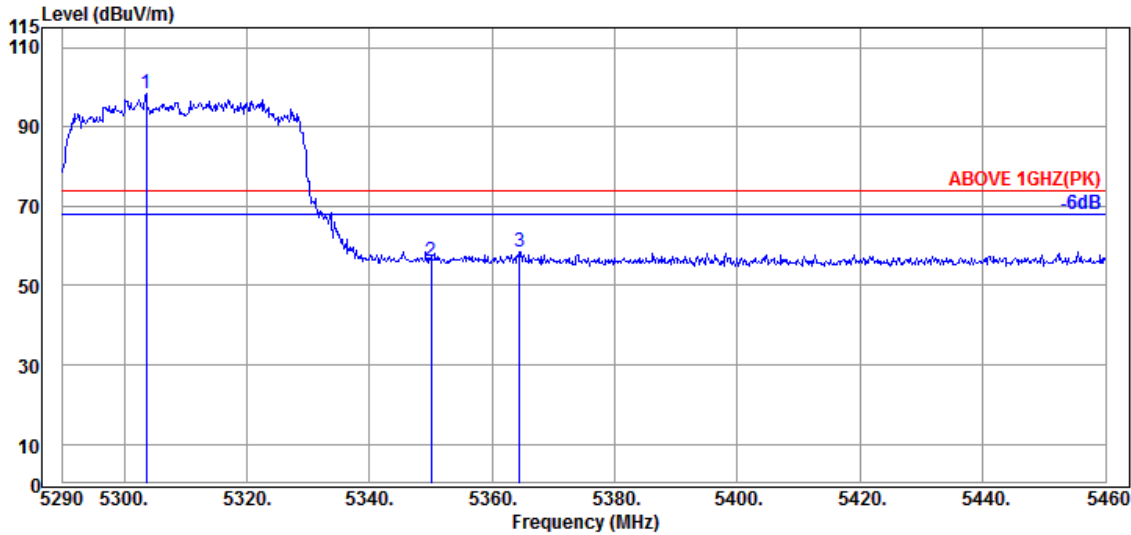

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.600	34.40	8.97	34.28	89.18	98.27	---	---	Peak
5350.010	34.90	8.99	34.26	46.44	56.07	74.00	17.93	Peak
5364.460	34.87	9.00	34.25	48.96	58.58	74.00	15.42	Peak

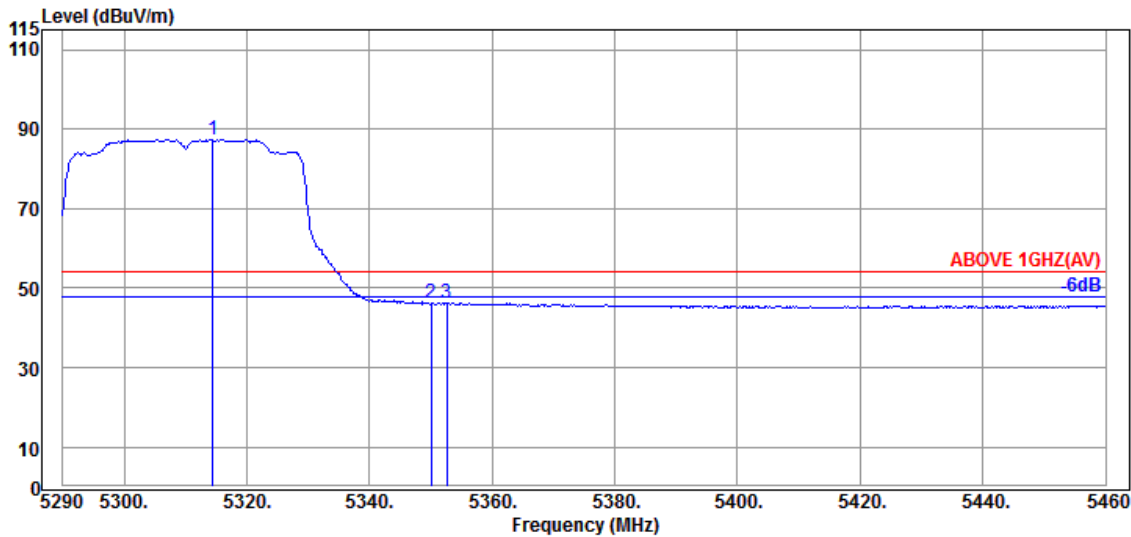


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.480	34.57	8.98	34.27	78.10	87.38	---	---	Average
5350.010	34.90	8.99	34.26	36.47	46.10	54.00	7.90	Average
5352.560	34.90	8.99	34.26	36.74	46.37	54.00	7.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

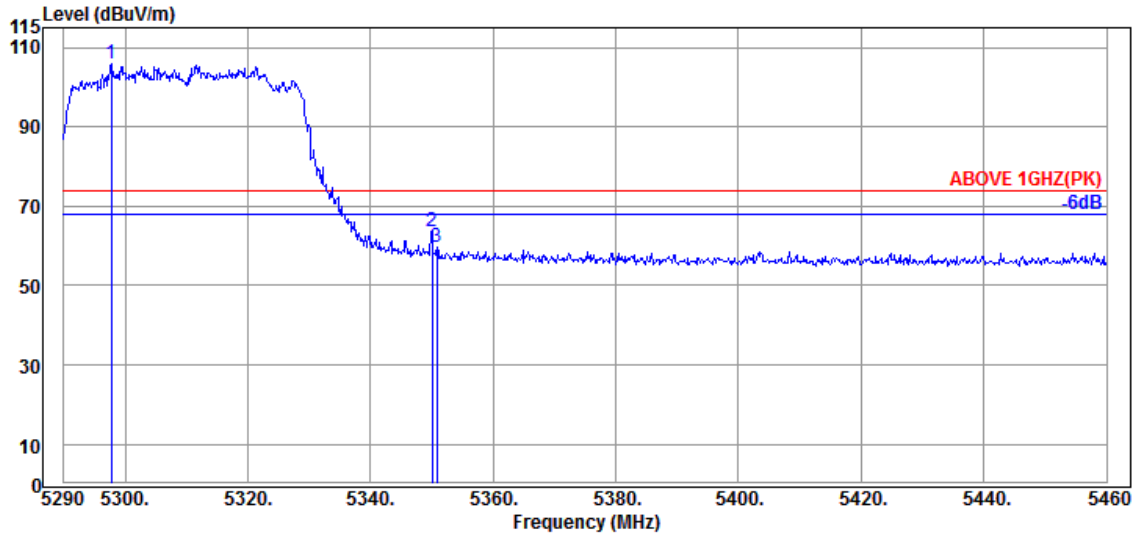

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.820	34.40	8.97	34.28	96.64	105.73	---	---	Peak
5350.010	34.90	8.99	34.26	53.80	63.43	74.00	10.57	Peak
5350.860	34.90	8.99	34.26	50.09	59.72	74.00	14.28	Peak

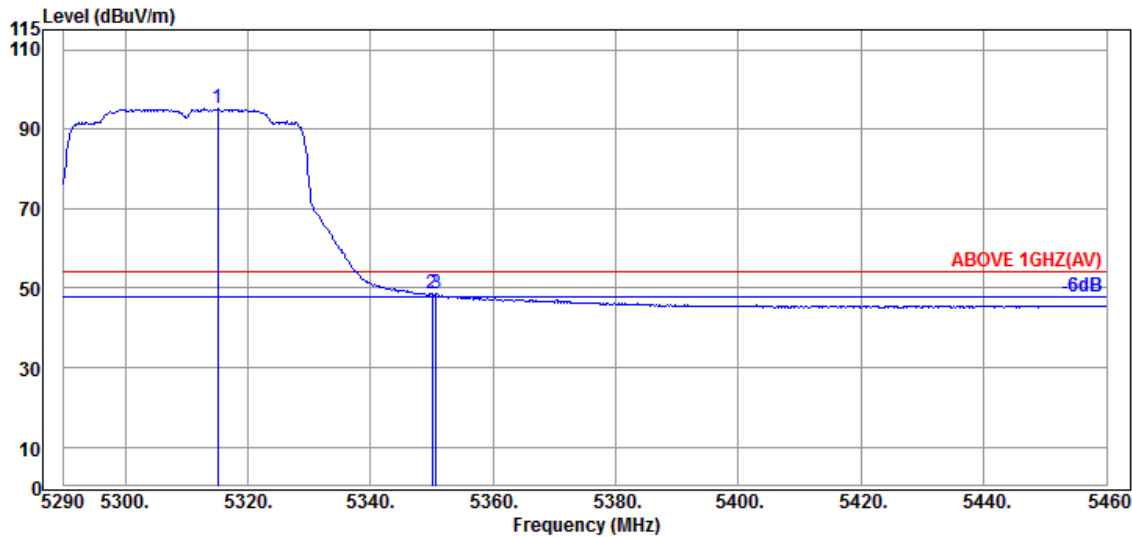


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.160	34.57	8.98	34.27	85.99	95.27	---	---	Average
5350.010	34.90	8.99	34.26	38.87	48.50	54.00	5.50	Average
5350.690	34.90	8.99	34.26	38.92	48.55	54.00	5.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

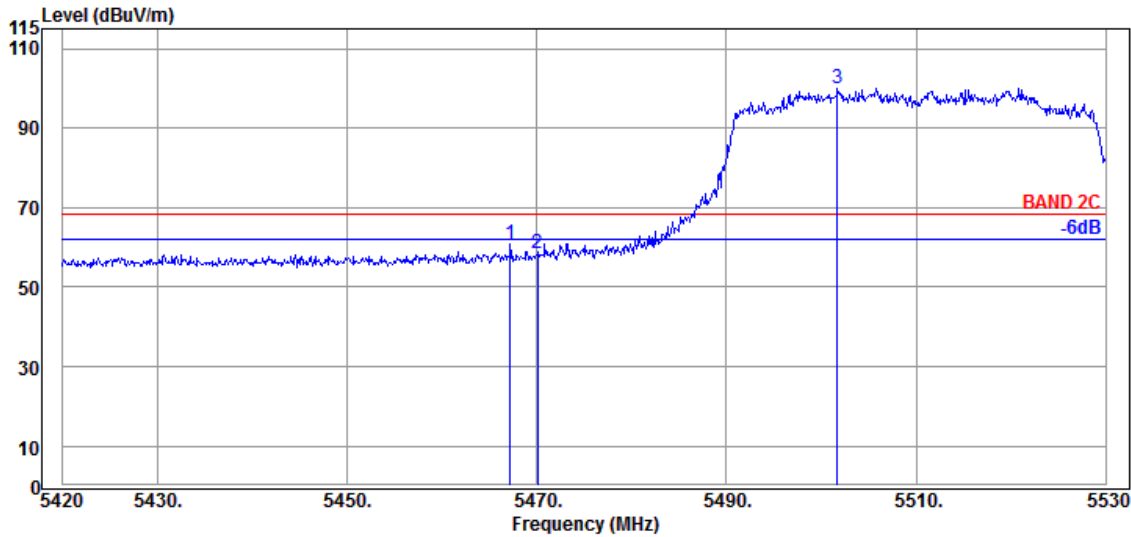

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.190	34.63	9.06	34.21	51.37	60.85	68.20	7.35	Peak
5470.050	34.63	9.06	34.21	48.98	58.46	68.20	9.74	Peak
@ 5501.730	34.70	9.08	34.20	90.42	100.00	---	---	Peak

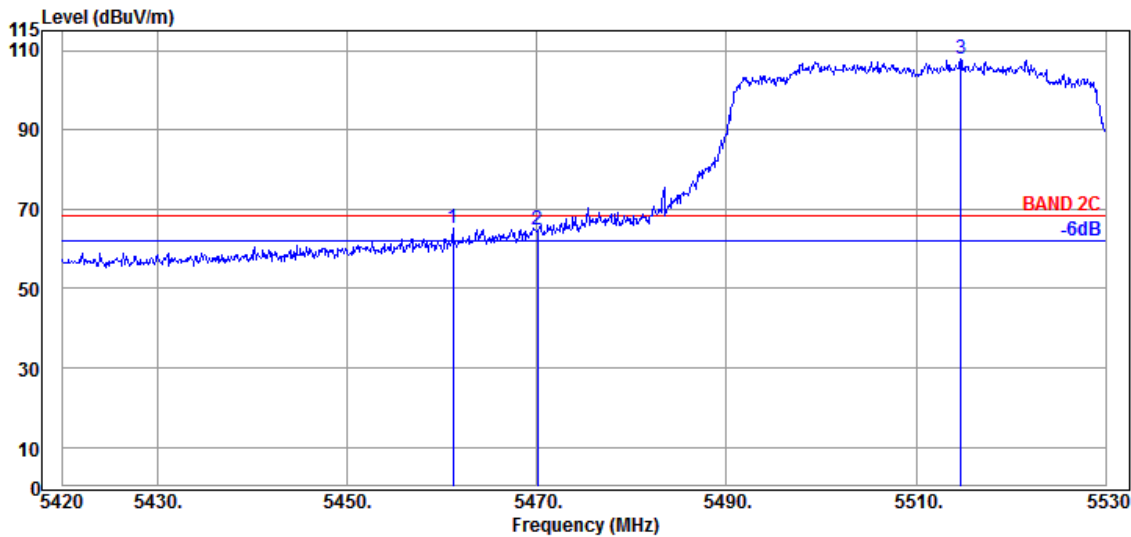


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.140	34.60	9.05	34.21	55.69	65.13	68.20	3.07	Peak
5470.050	34.63	9.06	34.21	55.52	65.00	68.20	3.20	Peak
@ 5514.710	34.70	9.09	34.21	98.15	107.73	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

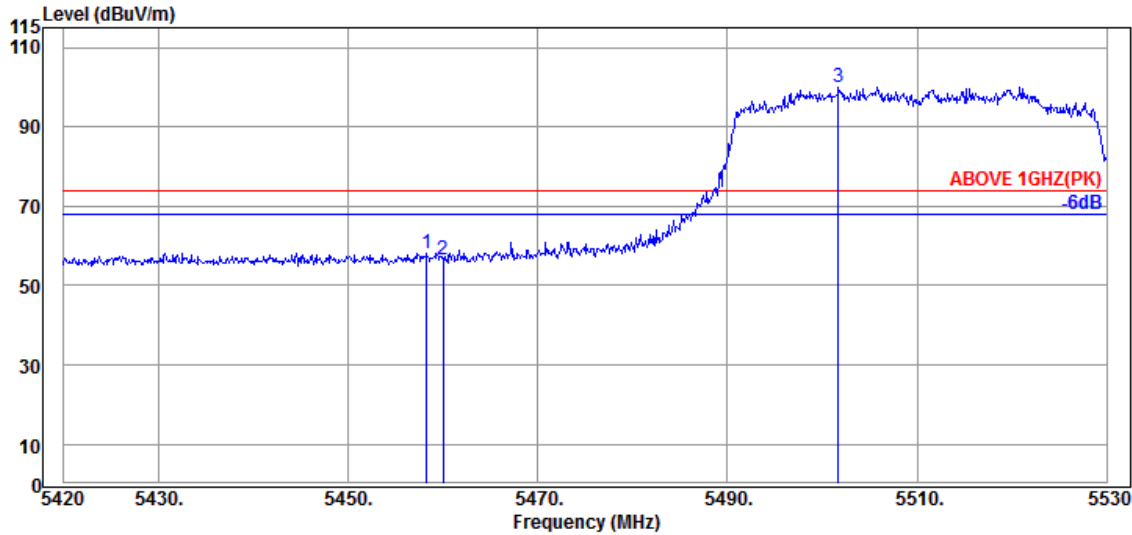

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.280	34.60	9.05	34.21	48.85	58.29	74.00	15.71	Peak
5460.040	34.60	9.05	34.21	47.18	56.62	74.00	17.38	Peak
@ 5501.730	34.70	9.08	34.20	90.42	100.00	---	---	Peak

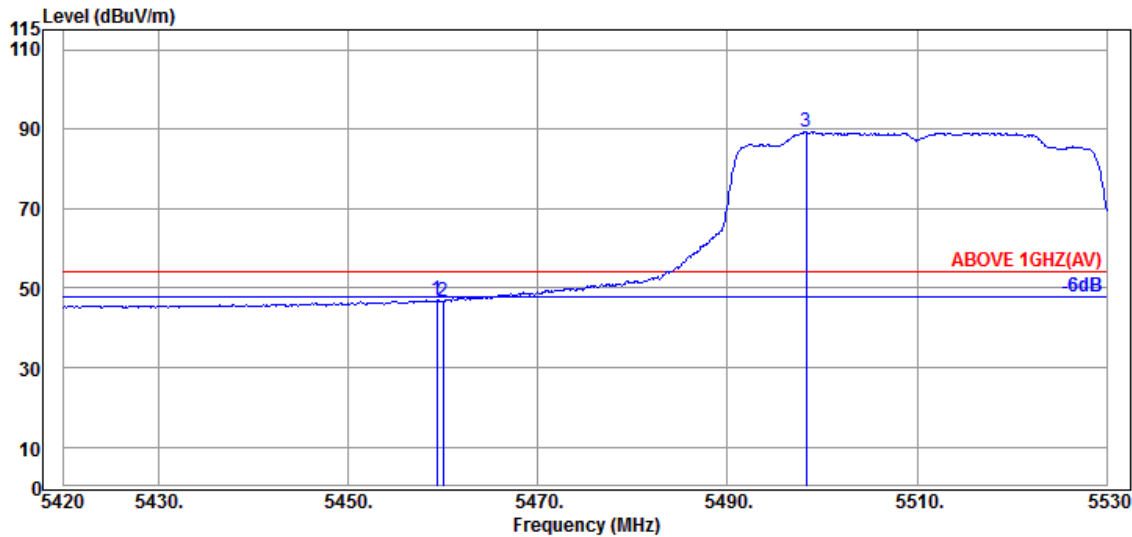


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.380	34.60	9.05	34.21	37.48	46.92	54.00	7.08	Average
5460.040	34.60	9.05	34.21	37.31	46.75	54.00	7.25	Average
@ 5498.320	34.70	9.08	34.20	79.68	89.26	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

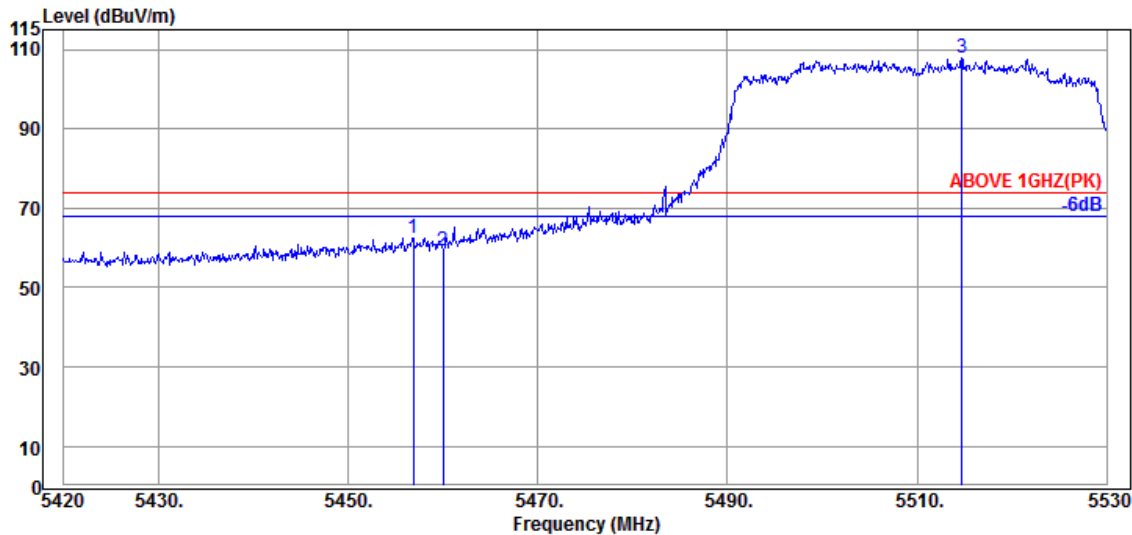

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.850	34.60	9.05	34.21	53.19	62.63	74.00	11.37	Peak
5460.040	34.60	9.05	34.21	49.82	59.26	74.00	14.74	Peak
@ 5514.710	34.70	9.09	34.21	98.15	107.73	---	---	Peak

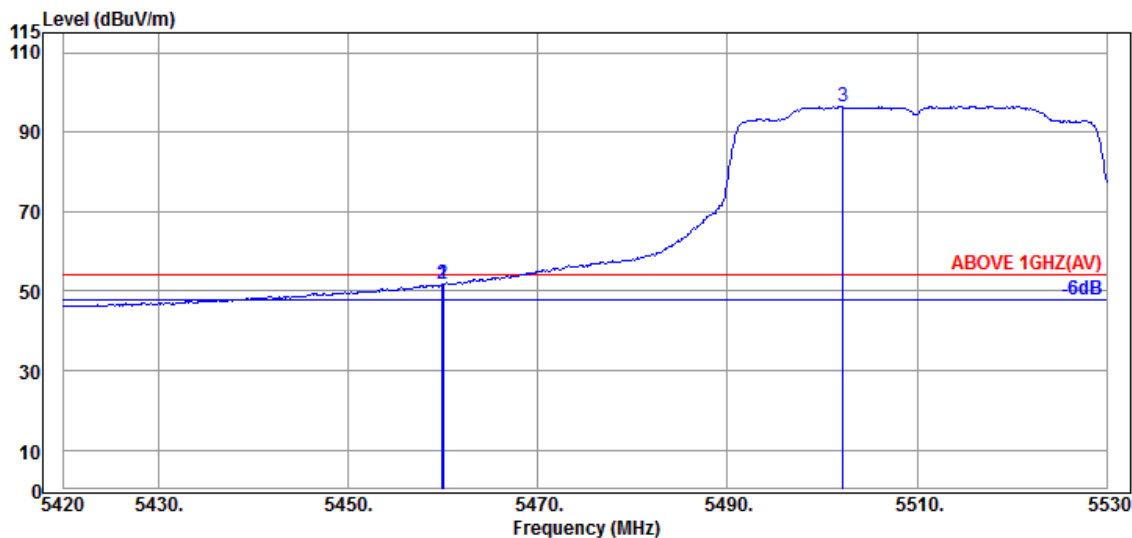


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.930	34.60	9.05	34.21	42.18	51.62	54.00	2.38	Average
5460.040	34.60	9.05	34.21	42.19	51.63	54.00	2.37	Average
@ 5502.170	34.70	9.08	34.20	86.98	96.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

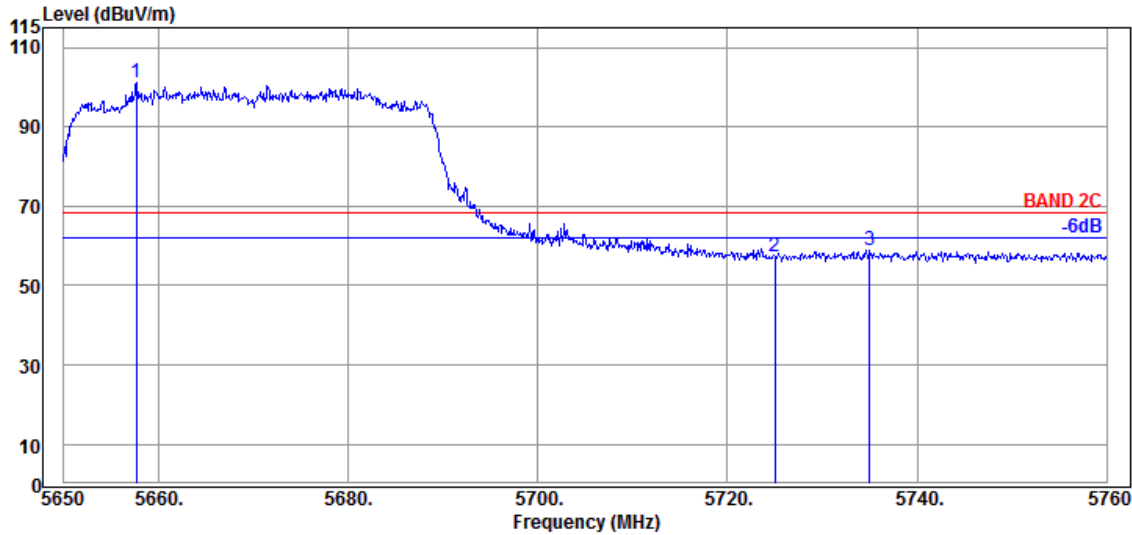

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5657.700	34.57	9.16	34.28	91.86	101.31	---	---	Peak
5725.020	34.90	9.20	34.30	47.41	57.21	68.20	10.99	Peak
5735.030	34.90	9.20	34.31	49.24	59.03	68.20	9.17	Peak

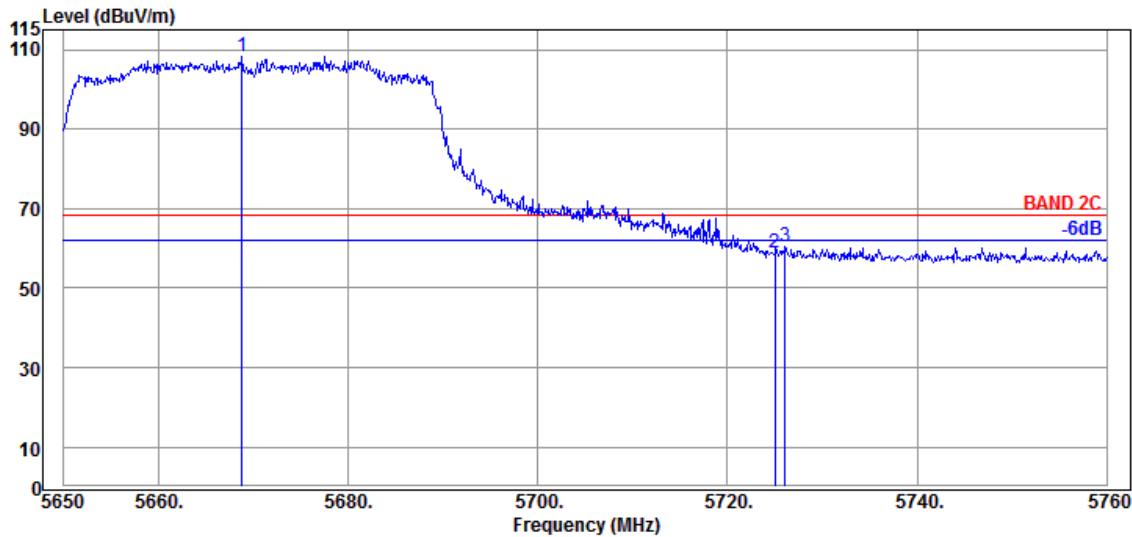


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.810	34.57	9.16	34.28	98.95	108.40	---	---	Peak
5725.020	34.90	9.20	34.30	49.22	59.02	68.20	9.18	Peak
5726.120	34.90	9.20	34.30	50.47	60.27	68.20	7.93	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

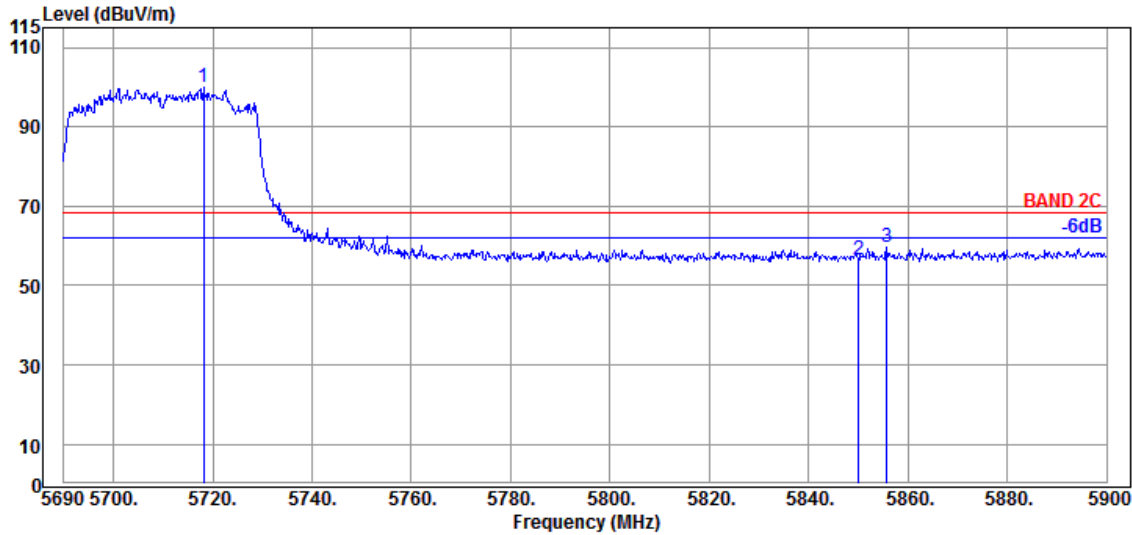

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.140	34.80	9.19	34.30	90.17	99.86	---	---	Peak
5850.020	35.40	9.25	34.36	46.27	56.56	68.20	11.64	Peak
5855.690	35.40	9.25	34.36	49.22	59.51	68.20	8.69	Peak

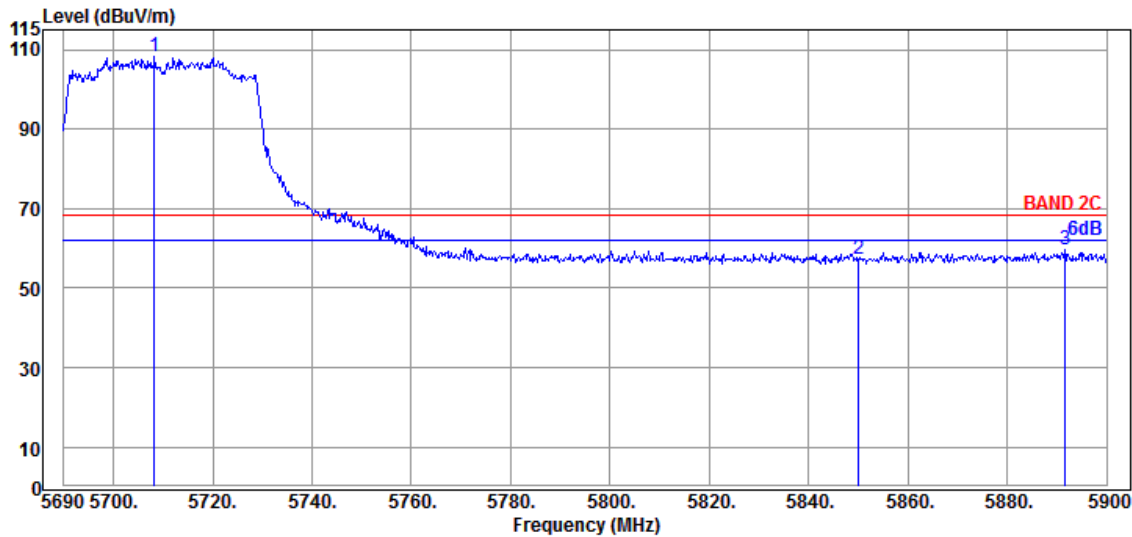


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.270	34.80	9.19	34.30	98.55	108.24	---	---	Peak
5850.020	35.40	9.25	34.36	47.13	57.42	68.20	10.78	Peak
5891.600	35.80	9.28	34.38	48.96	59.66	68.20	8.54	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

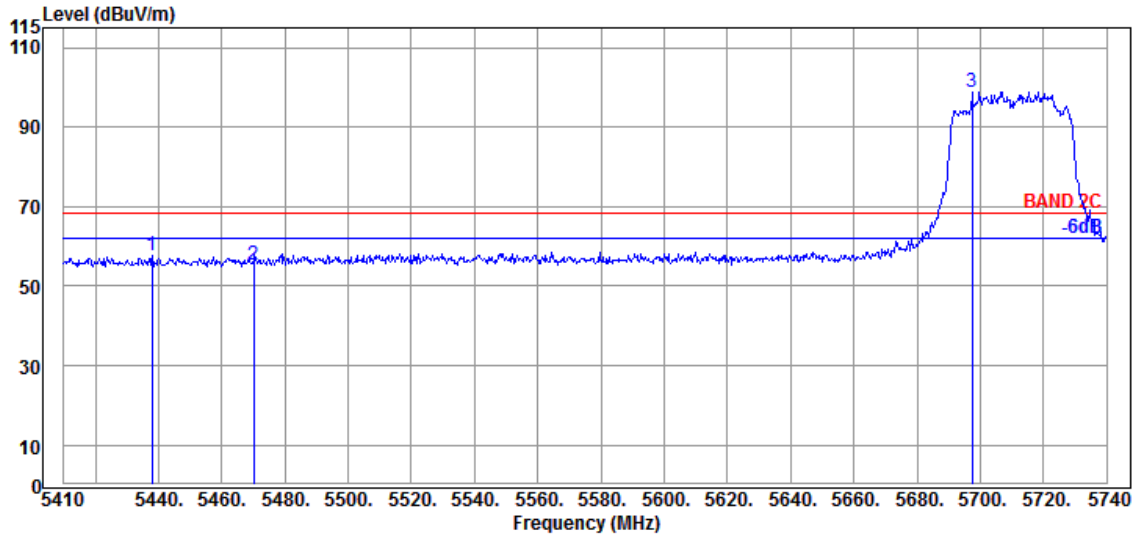

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.050	34.65	9.04	34.22	48.12	57.59	68.20	10.61	Peak
5470.060	34.63	9.06	34.21	45.81	55.29	68.20	12.91	Peak
@ 5697.430	34.70	9.18	34.29	89.33	98.92	---	---	Peak

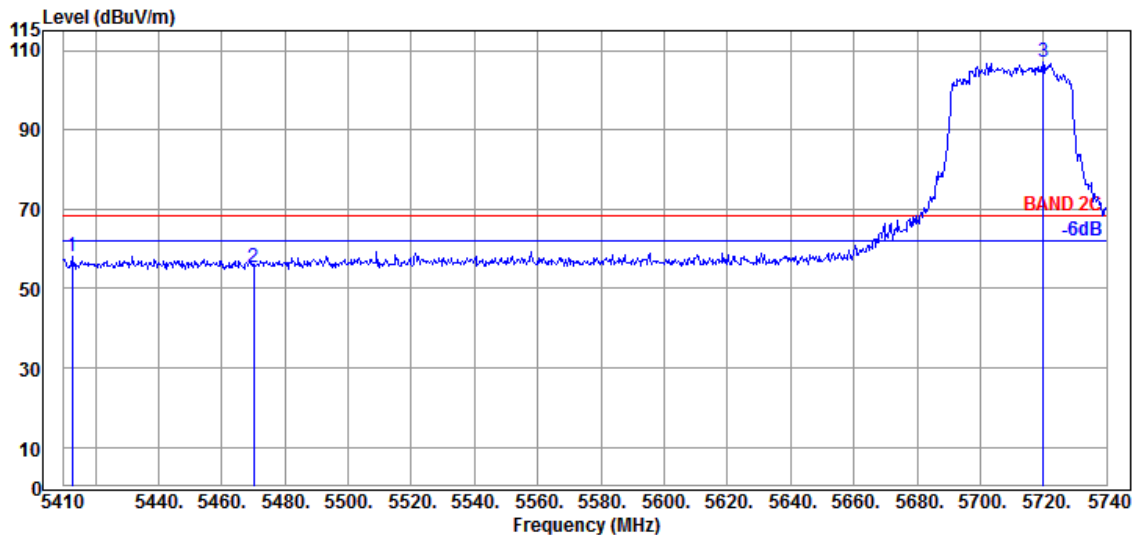


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.640	34.75	9.03	34.23	48.64	58.19	68.20	10.01	Peak
5470.060	34.63	9.06	34.21	45.96	55.44	68.20	12.76	Peak
@ 5719.870	34.80	9.19	34.30	97.30	106.99	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

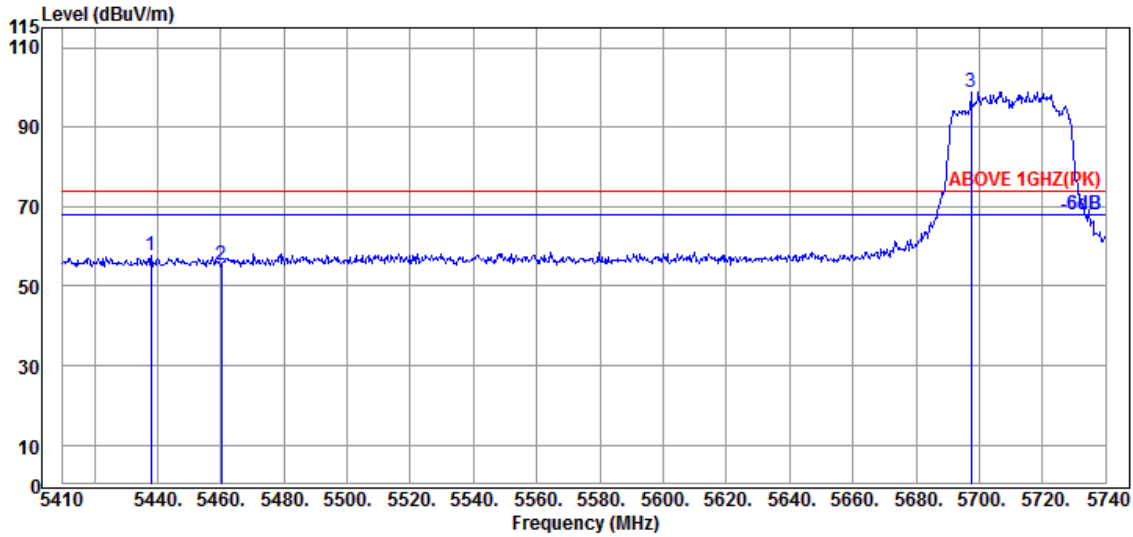

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.050	34.65	9.04	34.22	48.12	57.59	74.00	16.41	Peak
5460.160	34.60	9.05	34.21	45.76	55.20	74.00	18.80	Peak
@ 5697.430	34.70	9.18	34.29	89.33	98.92	---	---	Peak

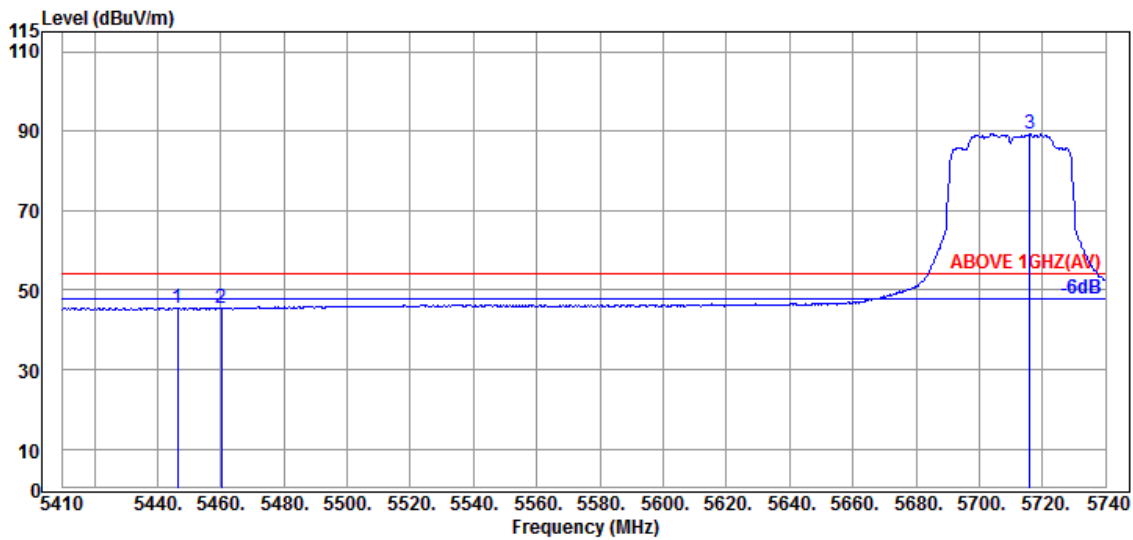


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.300	34.65	9.04	34.22	36.02	45.49	54.00	8.51	Average
5460.160	34.60	9.05	34.21	35.98	45.42	54.00	8.58	Average
@ 5715.910	34.80	9.19	34.30	79.62	89.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

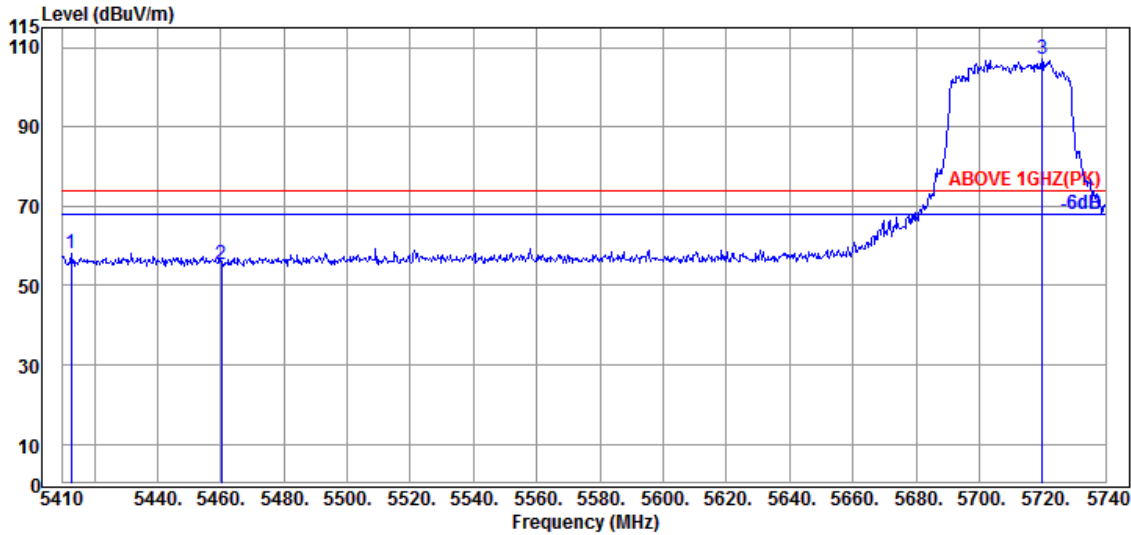

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.640	34.75	9.03	34.23	48.64	58.19	74.00	15.81	Peak
5460.160	34.60	9.05	34.21	45.88	55.32	74.00	18.68	Peak
@ 5719.870	34.80	9.19	34.30	97.30	106.99	---	---	Peak

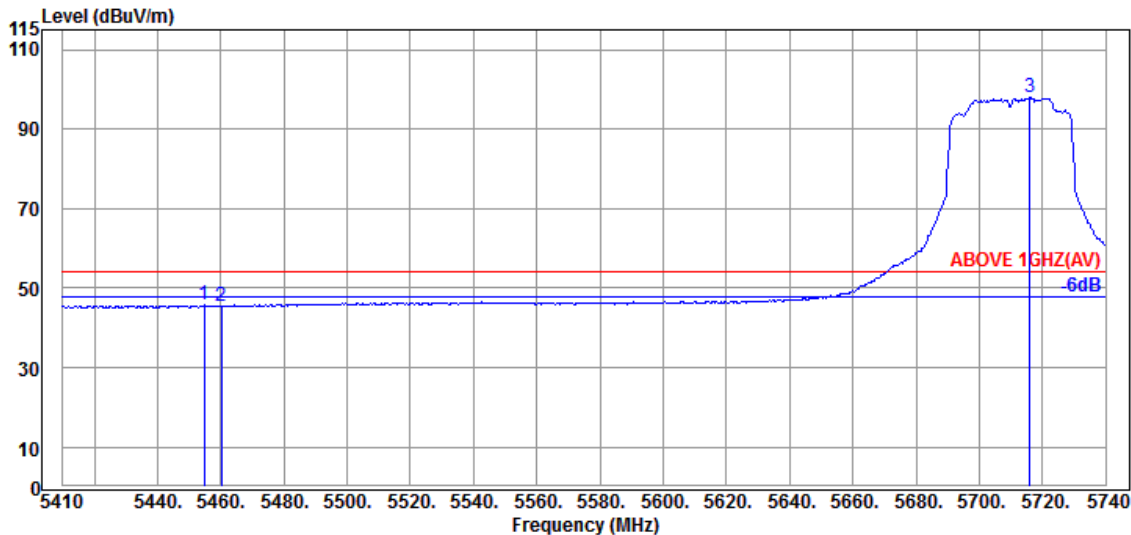


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.880	34.60	9.05	34.21	36.21	45.65	54.00	8.35	Average
5460.160	34.60	9.05	34.21	36.00	45.44	54.00	8.56	Average
@ 5715.910	34.80	9.19	34.30	88.22	97.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

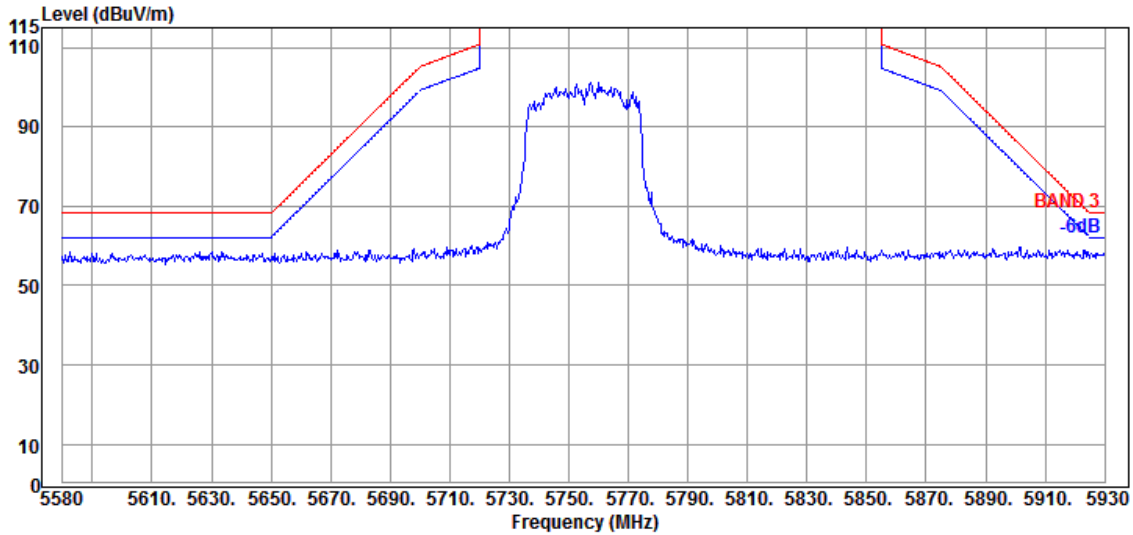


Antenna at Vertical Polarization

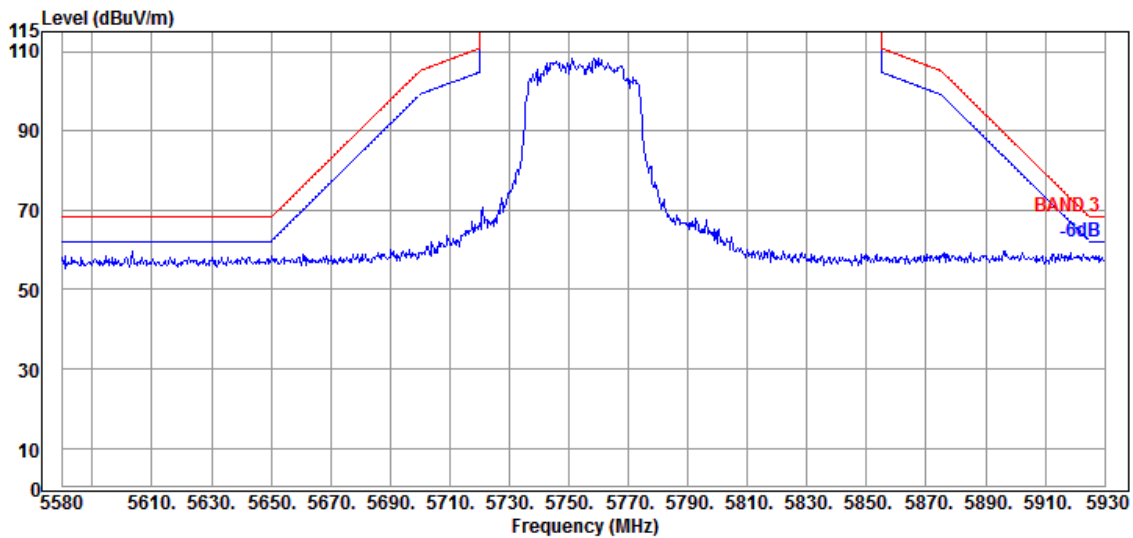


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

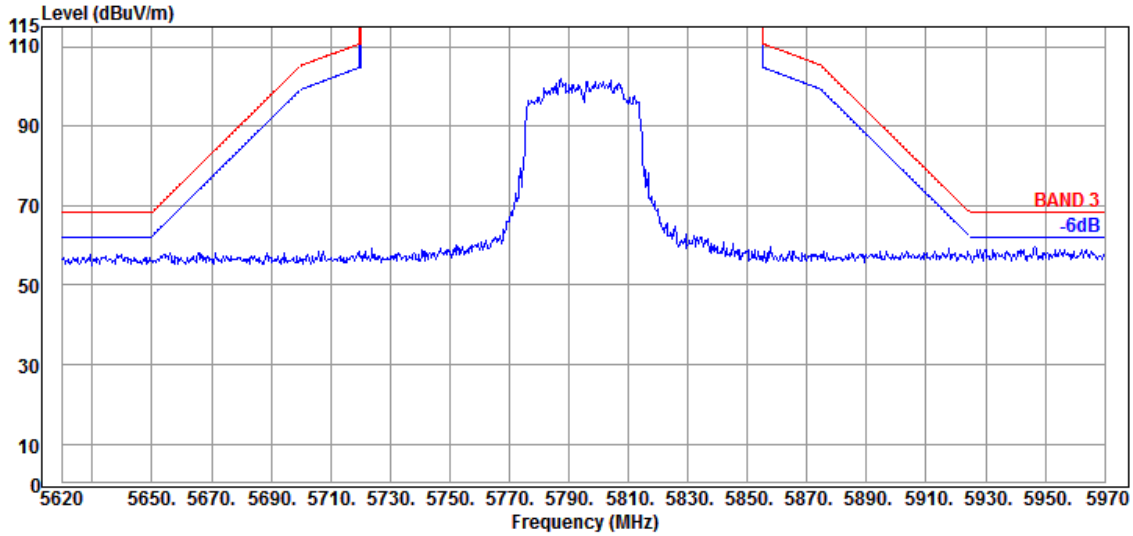

Antenna at Vertical Polarization

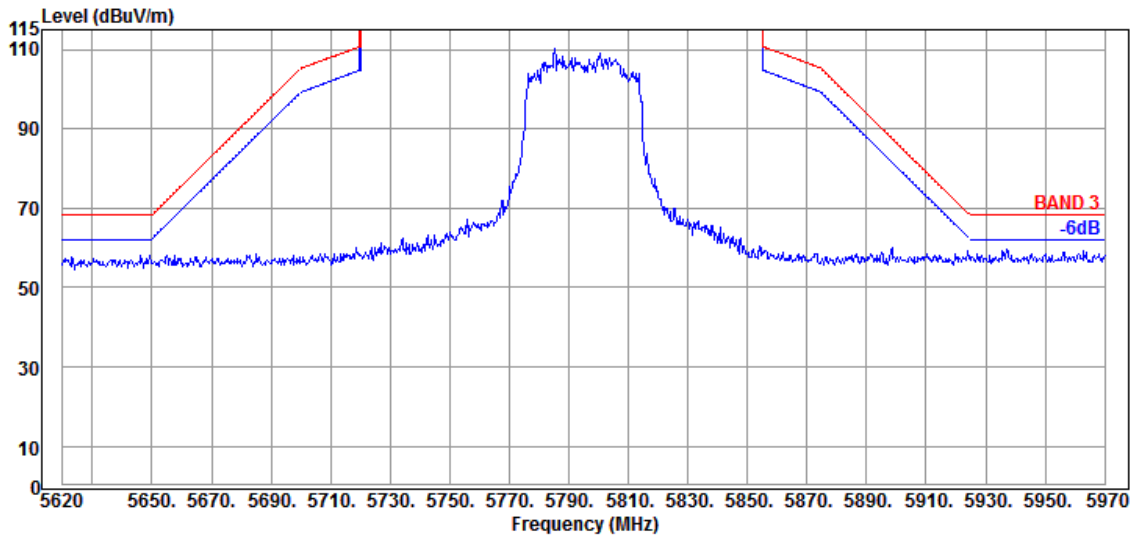


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

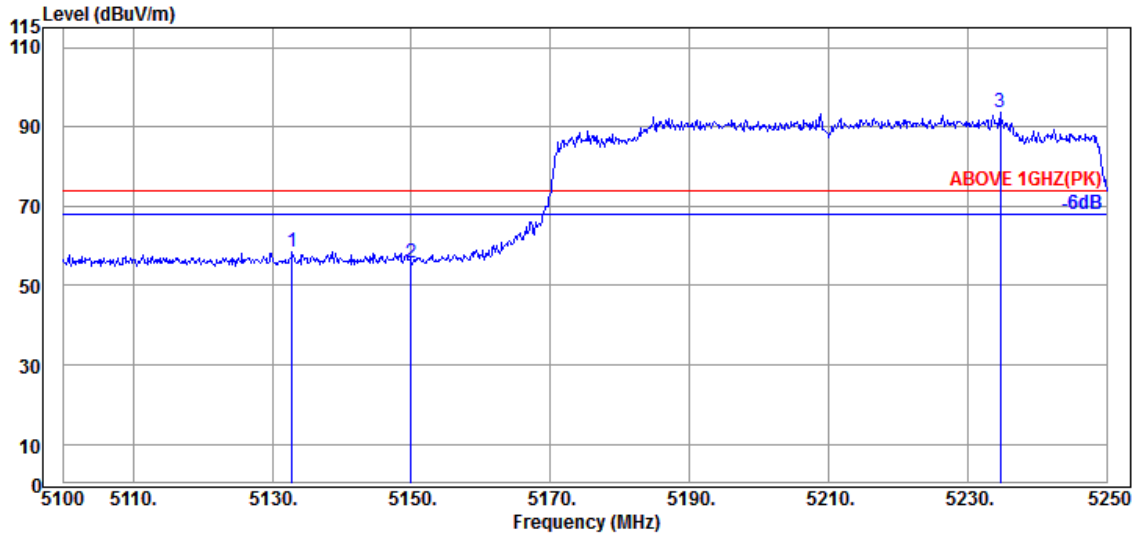

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.850	34.40	8.88	34.34	49.69	58.63	74.00	15.37	Peak
5149.950	34.50	8.88	34.34	46.86	55.90	74.00	18.10	Peak
@ 5234.700	34.55	8.93	34.30	84.51	93.69	---	---	Peak

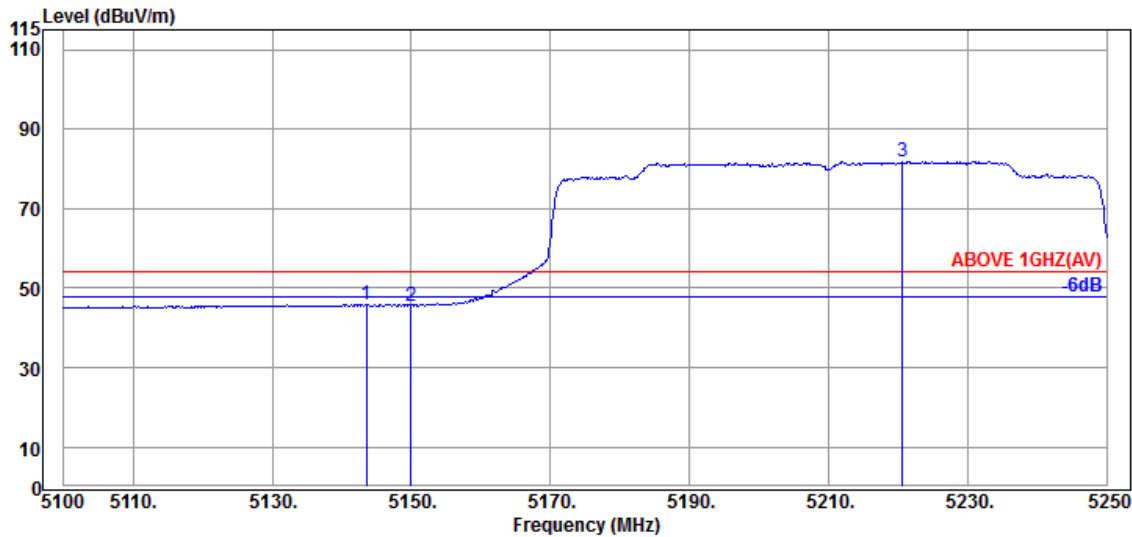


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.500	34.50	8.88	34.34	36.81	45.85	54.00	8.15	Average
5149.950	34.50	8.88	34.34	36.57	45.61	54.00	8.39	Average
@ 5220.600	34.60	8.93	34.31	72.63	81.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

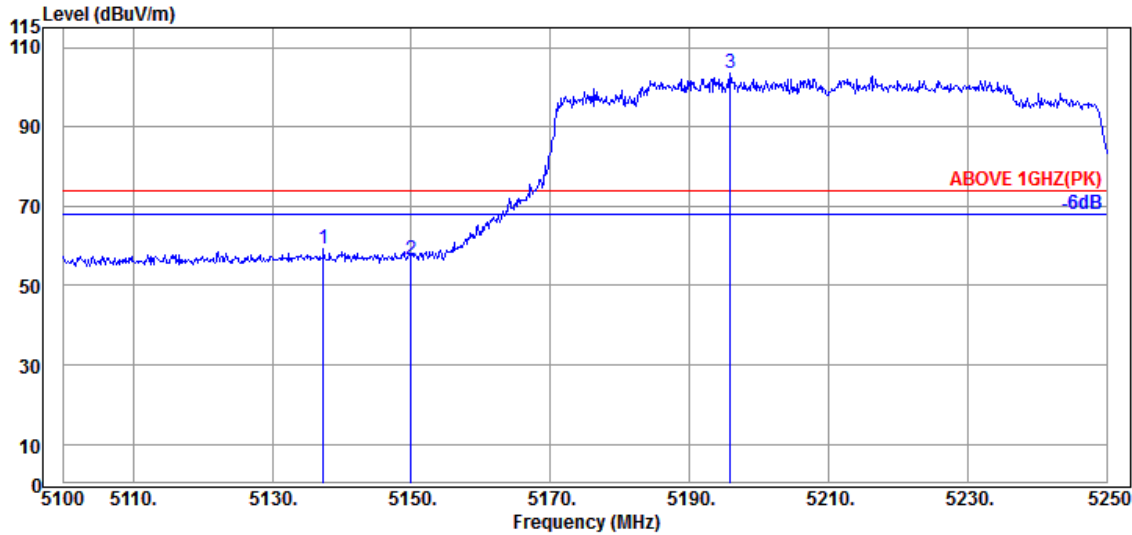

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.350	34.40	8.88	34.34	50.32	59.26	74.00	14.74	Peak
5149.950	34.50	8.88	34.34	47.56	56.60	74.00	17.40	Peak
@ 5195.850	34.70	8.91	34.32	94.29	103.58	---	---	Peak

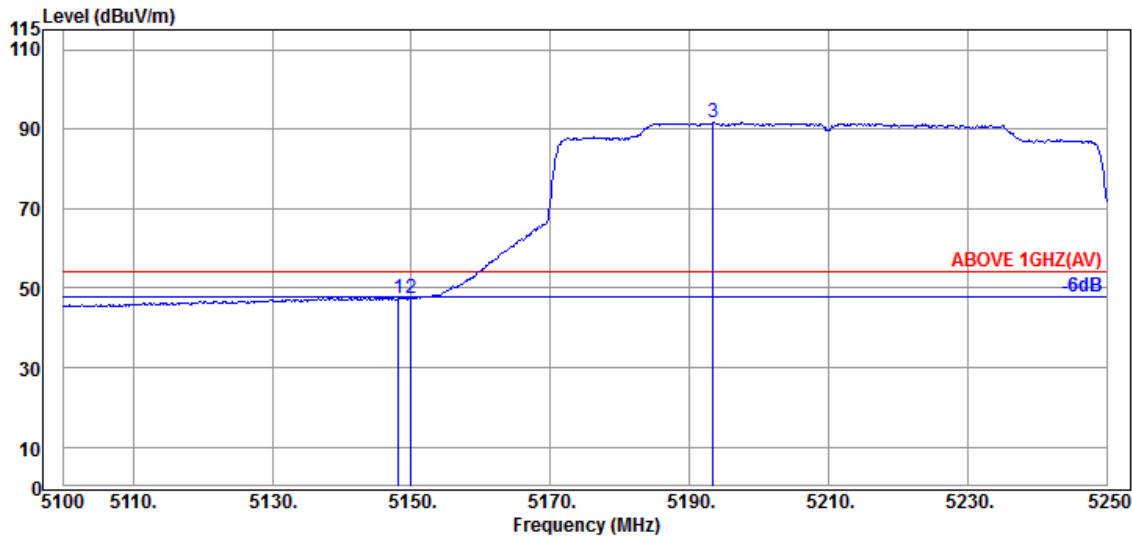


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.150	34.50	8.88	34.34	38.48	47.52	54.00	6.48	Average
5149.950	34.50	8.88	34.34	38.38	47.42	54.00	6.58	Average
@ 5193.450	34.70	8.91	34.32	82.35	91.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

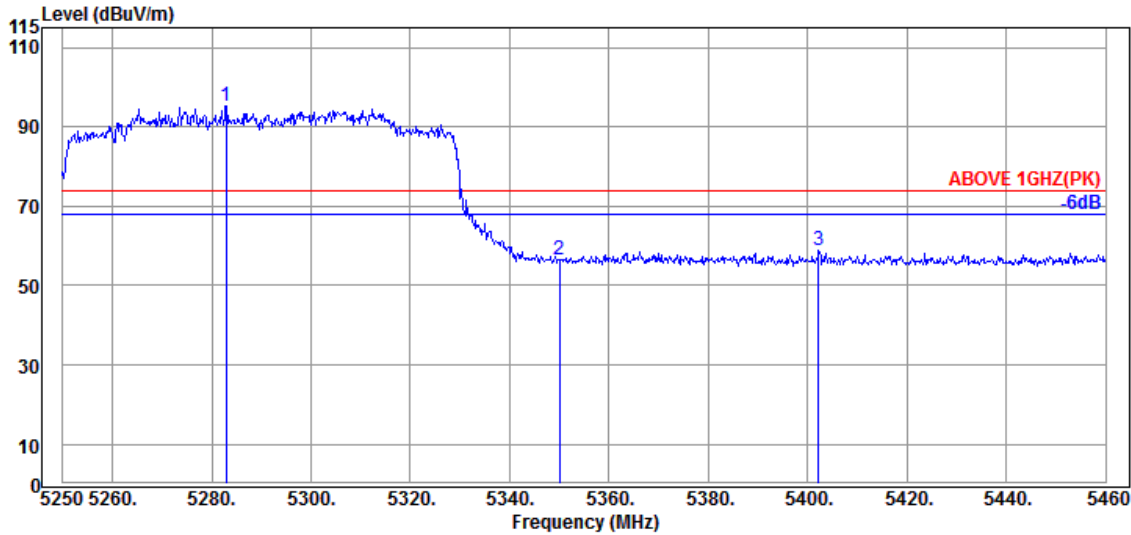

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.970	34.43	8.96	34.28	86.20	95.31	---	---	Peak
5349.960	34.90	8.99	34.26	47.08	56.71	74.00	17.29	Peak
5402.250	34.75	9.03	34.23	49.15	58.70	74.00	15.30	Peak

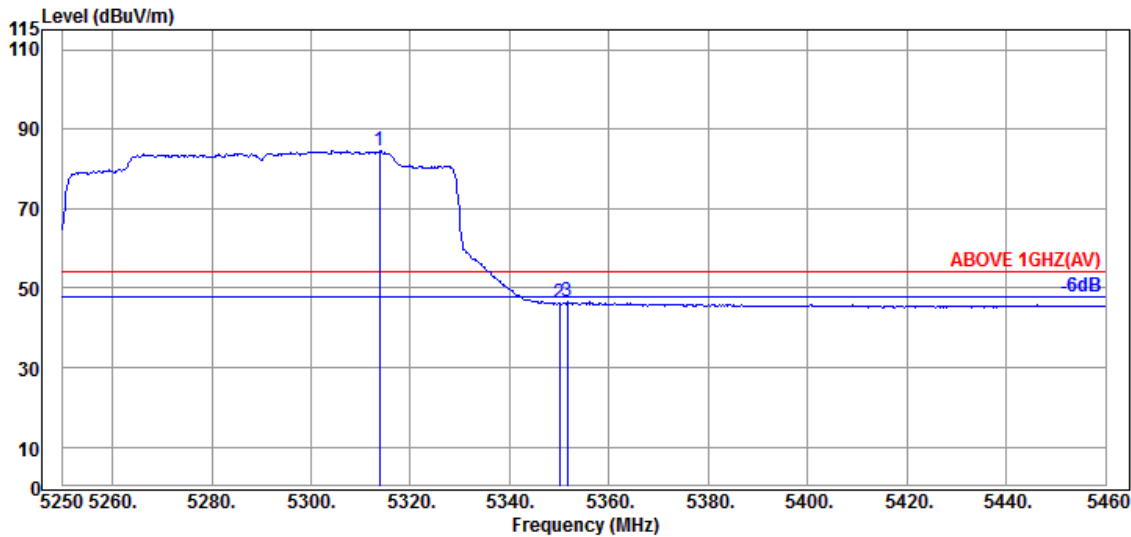


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.840	34.57	8.98	34.27	75.31	84.59	---	---	Average
5349.960	34.90	8.99	34.26	36.66	46.29	54.00	7.71	Average
5351.640	34.90	8.99	34.26	36.86	46.49	54.00	7.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

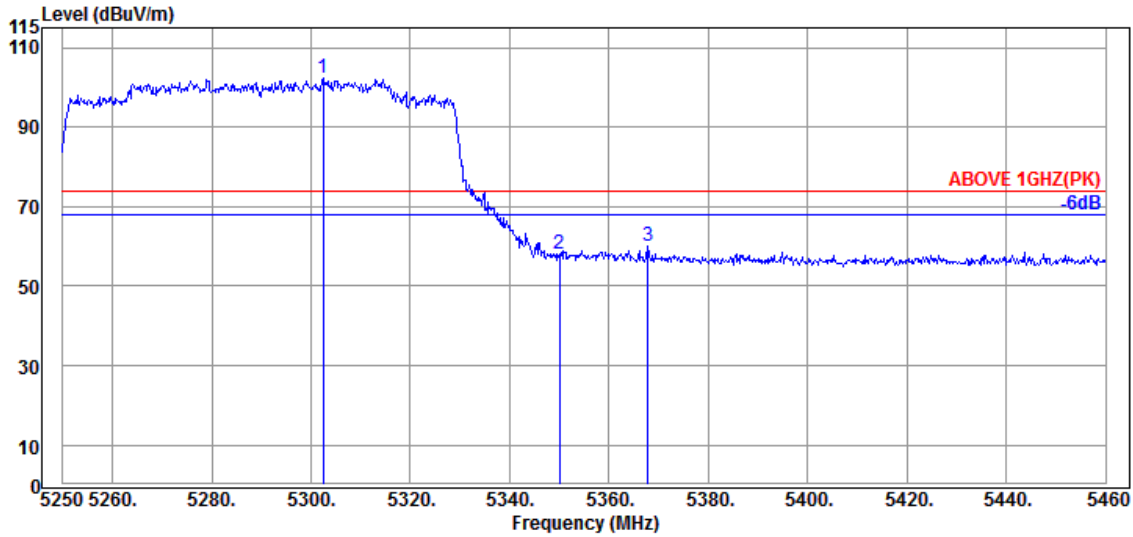

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.500	34.40	8.97	34.28	93.13	102.22	---	---	Peak
5349.960	34.90	8.99	34.26	48.64	58.27	74.00	15.73	Peak
5367.810	34.87	9.00	34.25	50.46	60.08	74.00	13.92	Peak

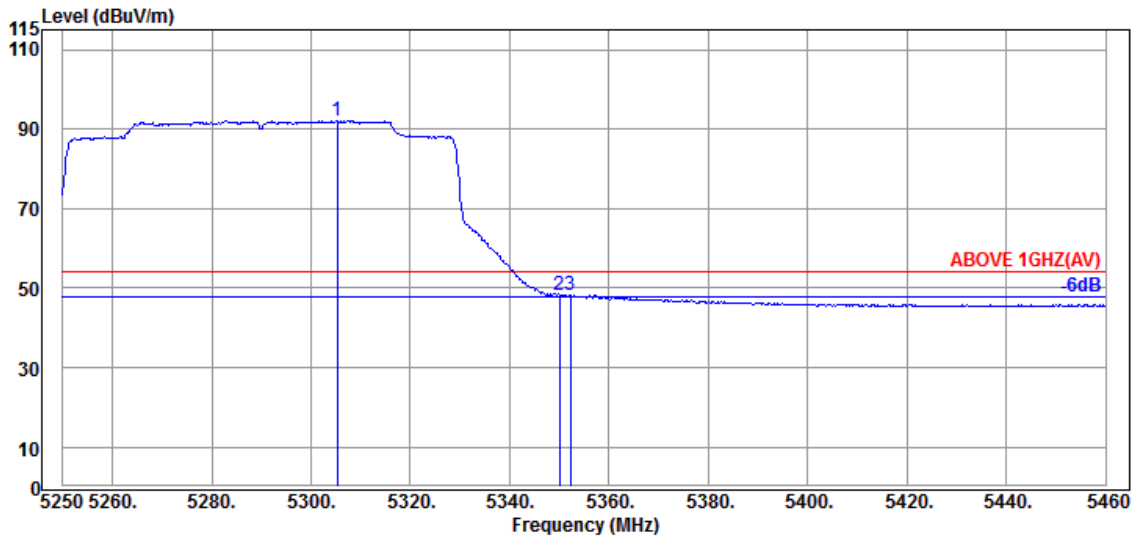


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.230	34.40	8.97	34.28	83.10	92.19	---	---	Average
5349.960	34.90	8.99	34.26	38.66	48.29	54.00	5.71	Average
5352.270	34.90	8.99	34.26	38.62	48.25	54.00	5.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

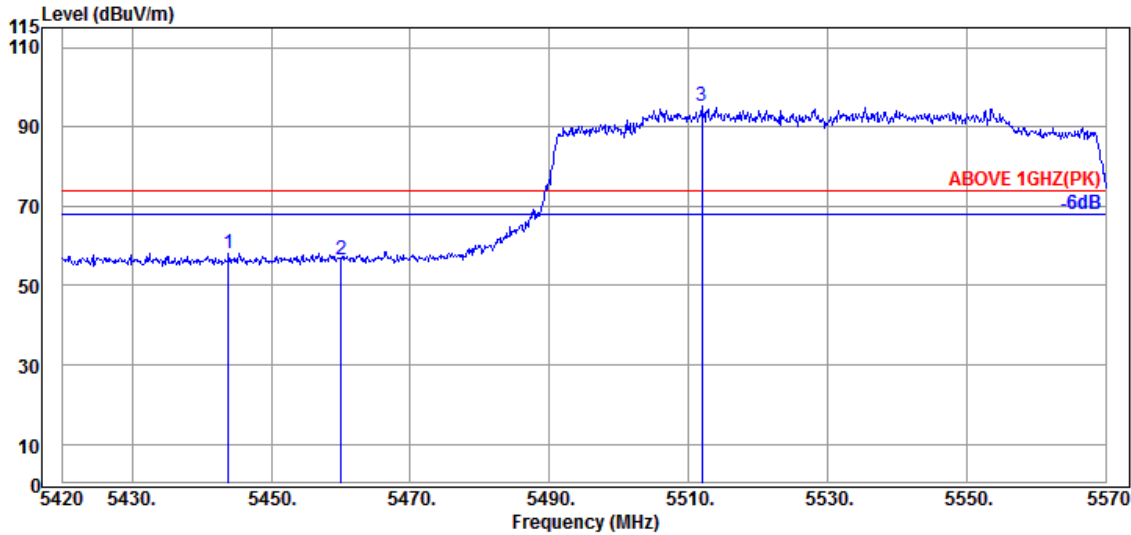

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.850	34.65	9.04	34.22	48.48	57.95	74.00	16.05	Peak
5460.050	34.60	9.05	34.21	47.22	56.66	74.00	17.34	Peak
@ 5511.950	34.70	9.09	34.21	85.74	95.32	---	---	Peak

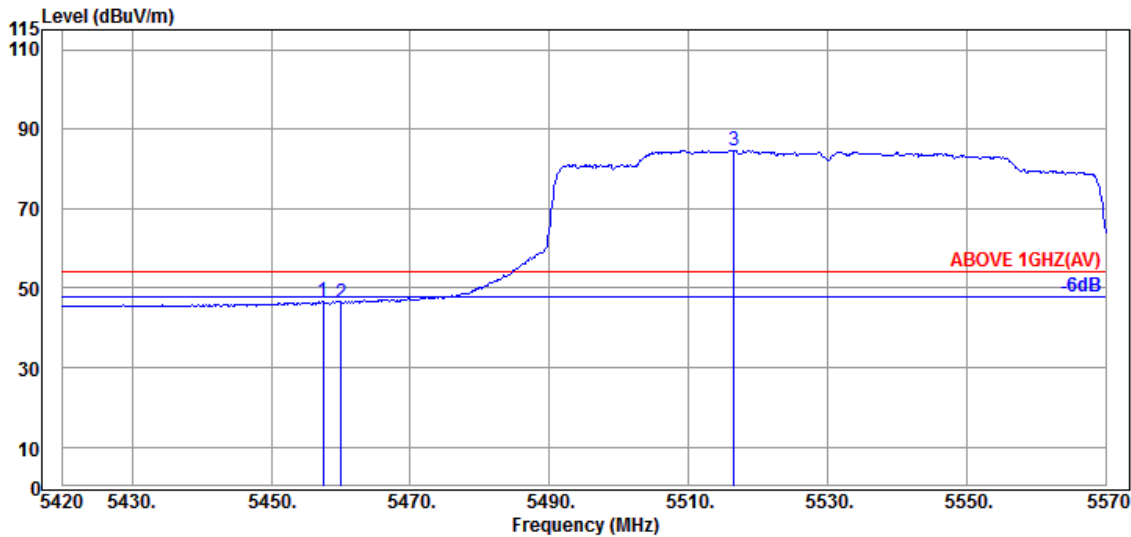


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.60	9.05	34.21	37.34	46.78	54.00	7.22	Average
5460.050	34.60	9.05	34.21	36.99	46.43	54.00	7.57	Average
@ 5516.600	34.70	9.09	34.21	75.19	84.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

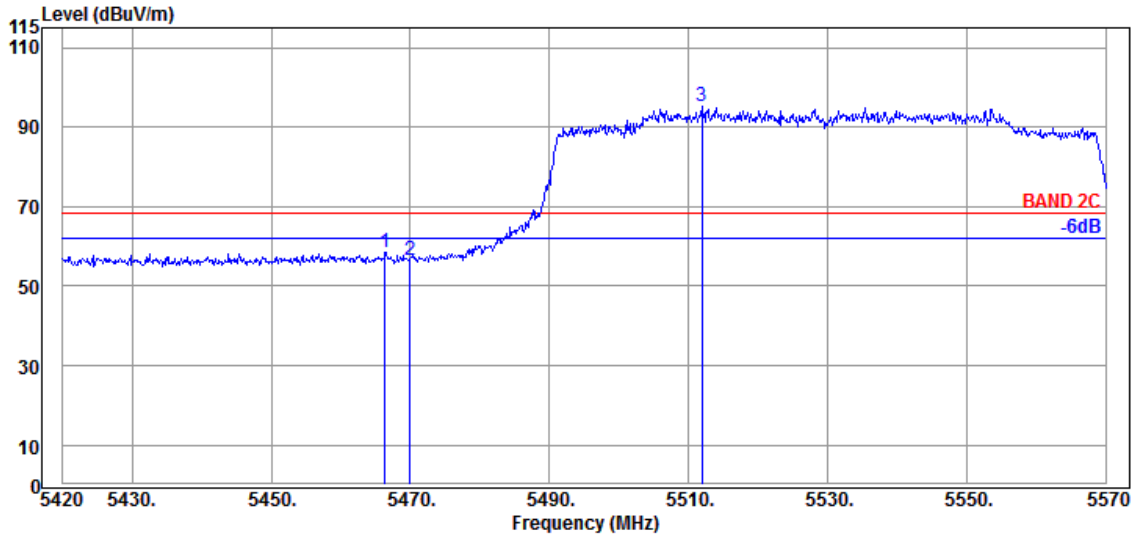

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.350	34.63	9.06	34.21	49.12	58.60	68.20	9.60	Peak
5469.950	34.63	9.06	34.21	47.13	56.61	68.20	11.59	Peak
@ 5511.950	34.70	9.09	34.21	85.74	95.32	---	---	Peak

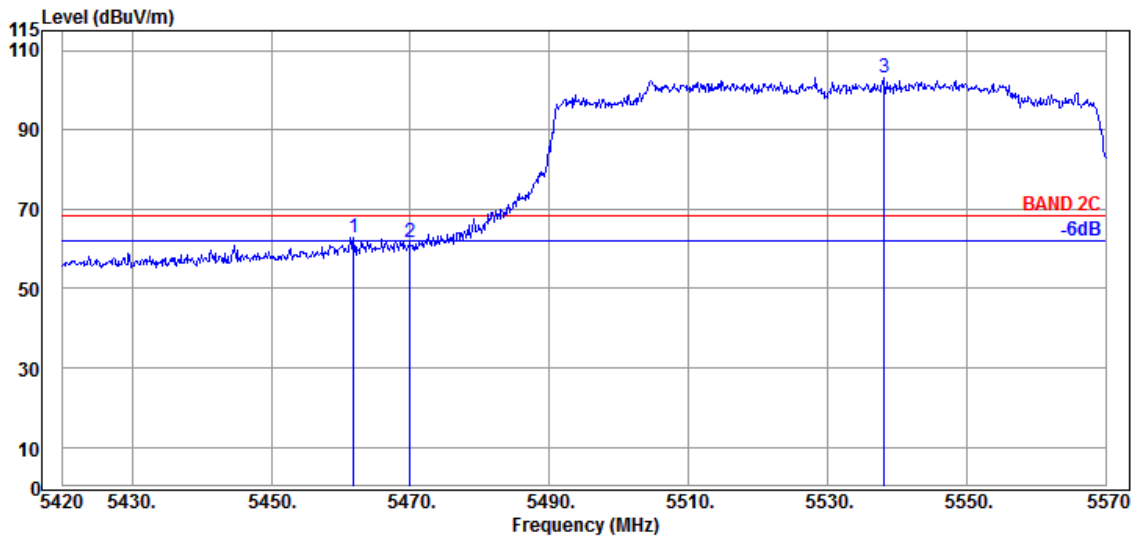


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.850	34.60	9.05	34.21	53.37	62.81	68.20	5.39	Peak
5469.950	34.63	9.06	34.21	52.11	61.59	68.20	6.61	Peak
@ 5538.200	34.70	9.09	34.22	93.59	103.16	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

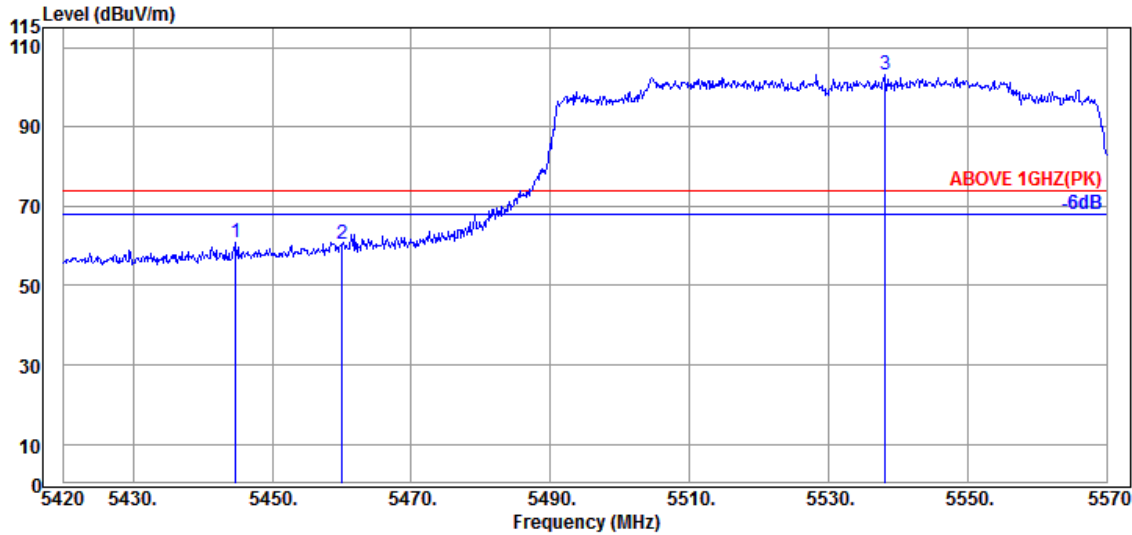

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.750	34.65	9.04	34.22	51.28	60.75	74.00	13.25	Peak
5460.050	34.60	9.05	34.21	51.05	60.49	74.00	13.51	Peak
@ 5538.200	34.70	9.09	34.22	93.59	103.16	---	---	Peak

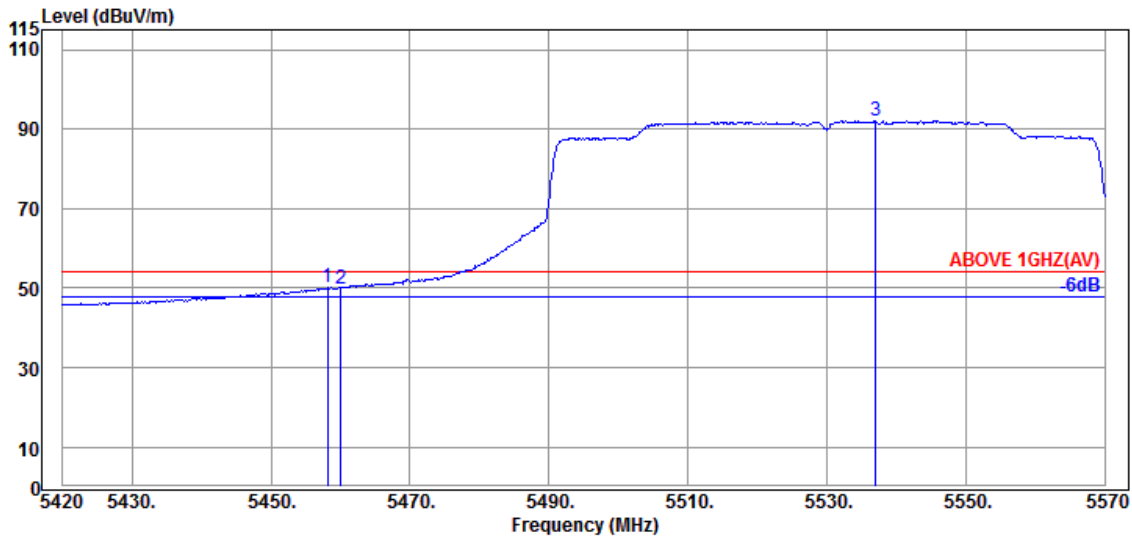


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.100	34.60	9.05	34.21	40.61	50.05	54.00	3.95	Average
5460.050	34.60	9.05	34.21	40.42	49.86	54.00	4.14	Average
@ 5537.000	34.70	9.09	34.22	82.47	92.04	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

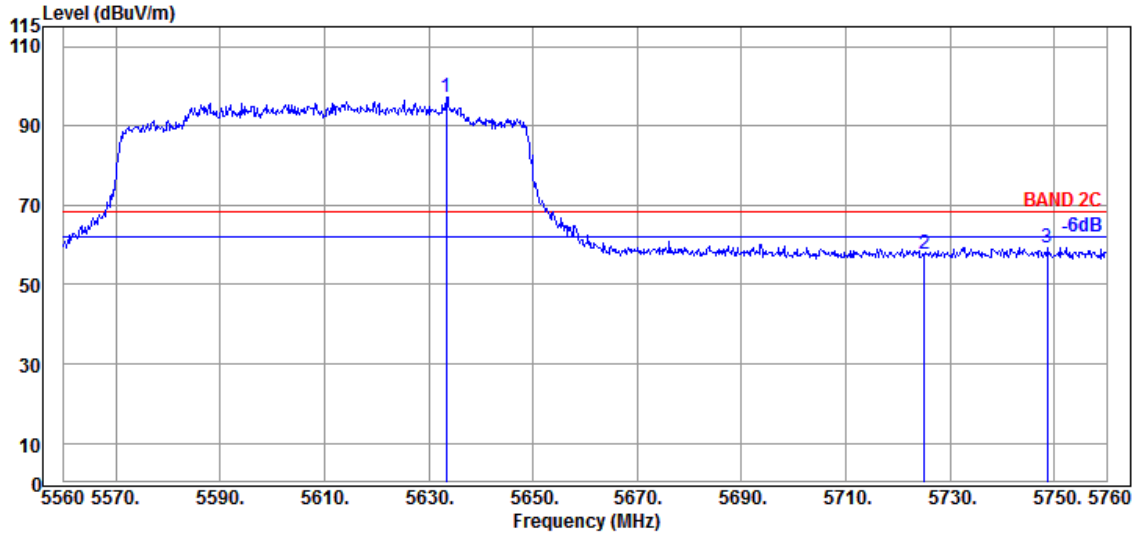

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5633.400	34.47	9.14	34.27	87.92	97.26	---	---	Peak
5725.000	34.90	9.20	34.30	48.09	57.89	68.20	10.31	Peak
5748.600	35.00	9.20	34.32	49.59	59.47	68.20	8.73	Peak

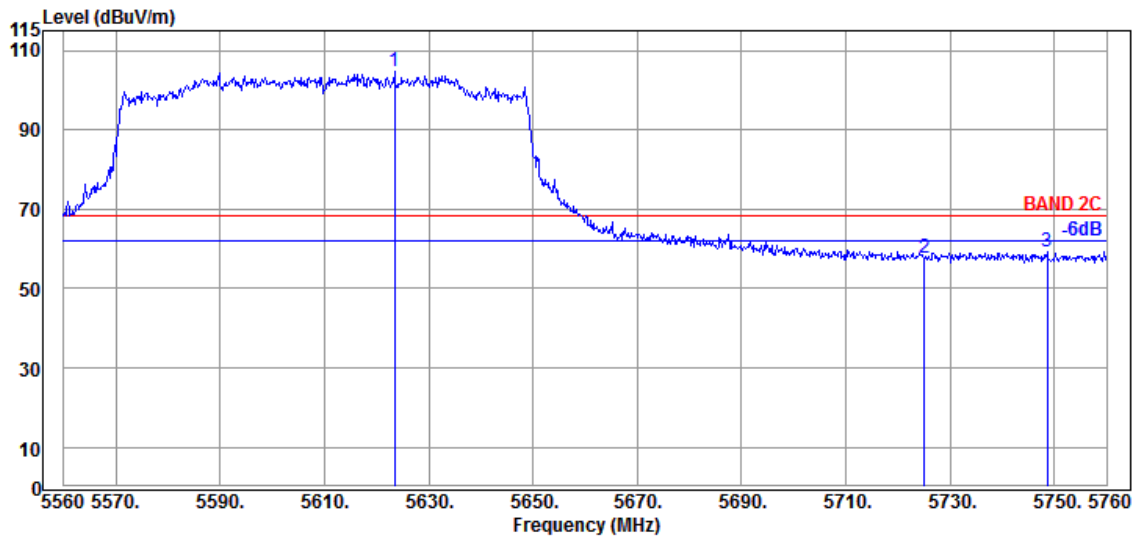


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5623.400	34.43	9.14	34.26	95.33	104.64	---	---	Peak
5725.000	34.90	9.20	34.30	47.84	57.64	68.20	10.56	Peak
5748.600	35.00	9.20	34.32	49.25	59.13	68.20	9.07	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

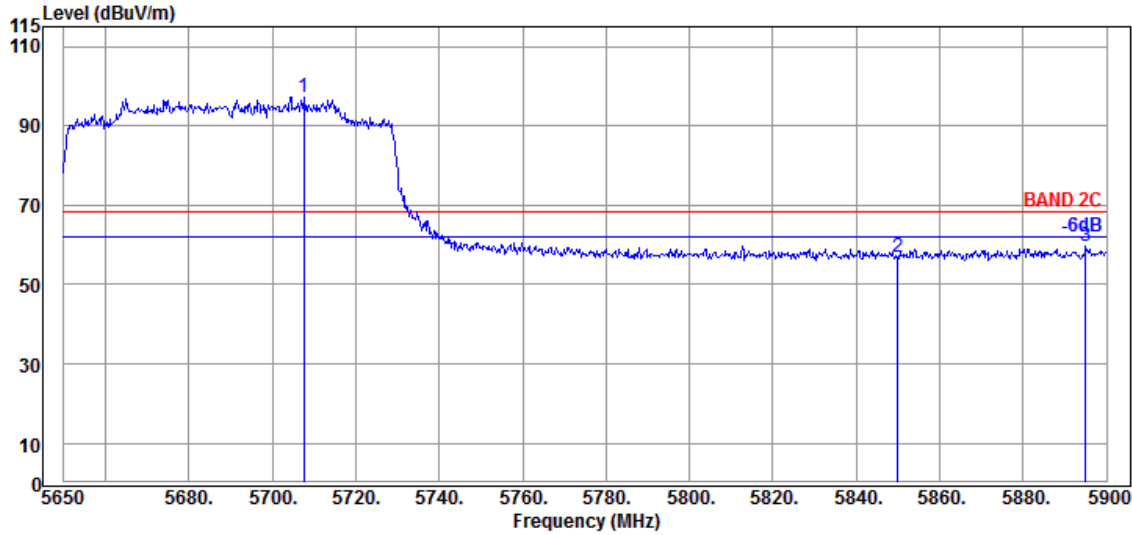

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.500	34.80	9.19	34.29	87.65	97.35	---	---	Peak
5850.000	35.40	9.25	34.36	46.53	56.82	68.20	11.38	Peak
5895.000	35.80	9.28	34.38	49.01	59.71	68.20	8.49	Peak

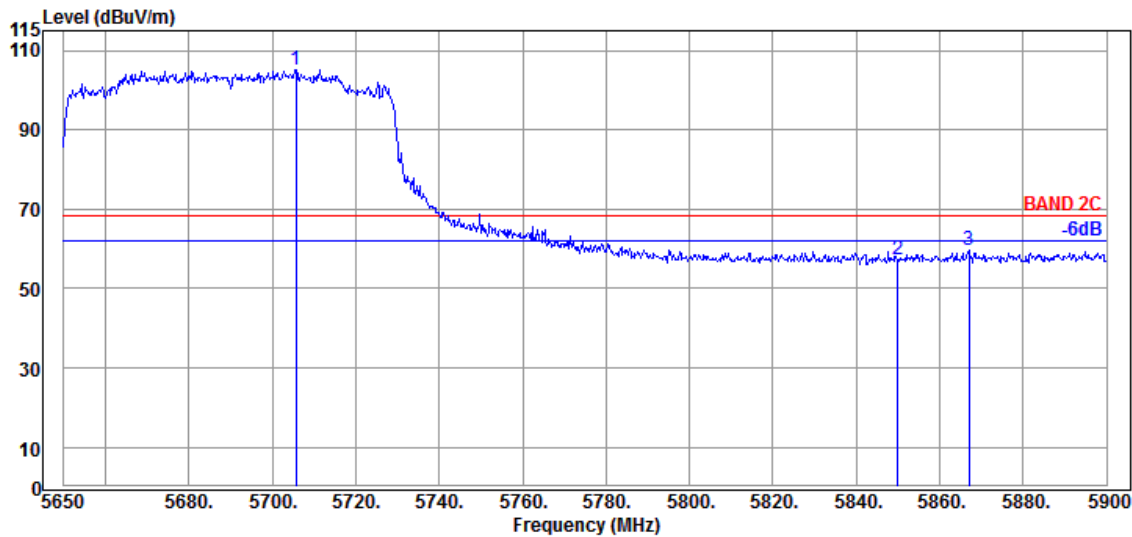


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.750	34.80	9.19	34.29	95.46	105.16	---	---	Peak
5850.000	35.40	9.25	34.36	46.94	57.23	68.20	10.97	Peak
5867.000	35.53	9.26	34.37	49.15	59.57	68.20	8.63	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

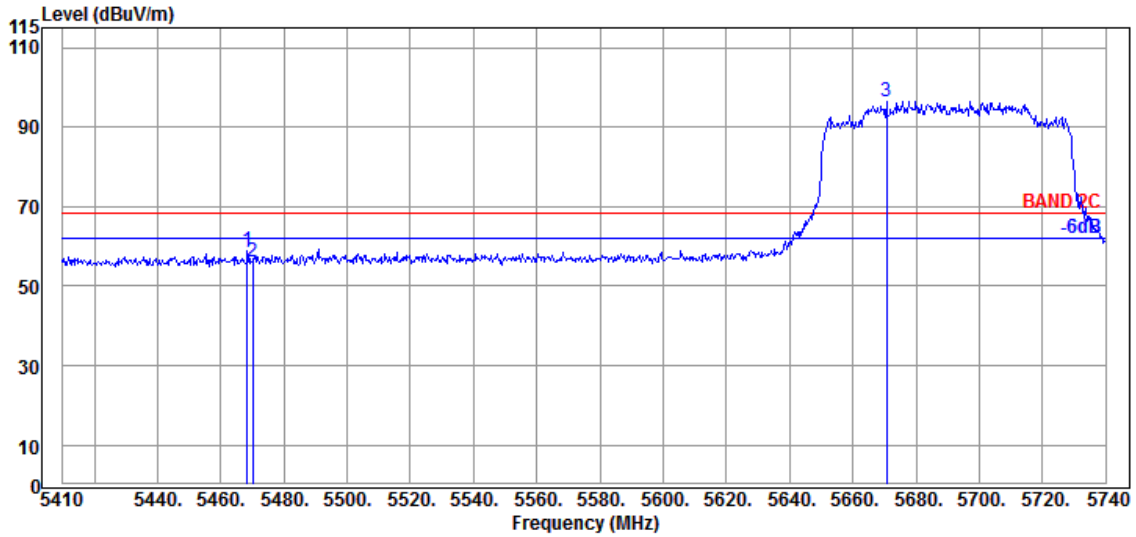

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.410	34.63	9.06	34.21	49.24	58.72	68.20	9.48	Peak
5470.060	34.63	9.06	34.21	46.58	56.06	68.20	12.14	Peak
@ 5670.700	34.57	9.16	34.29	87.03	96.47	---	---	Peak

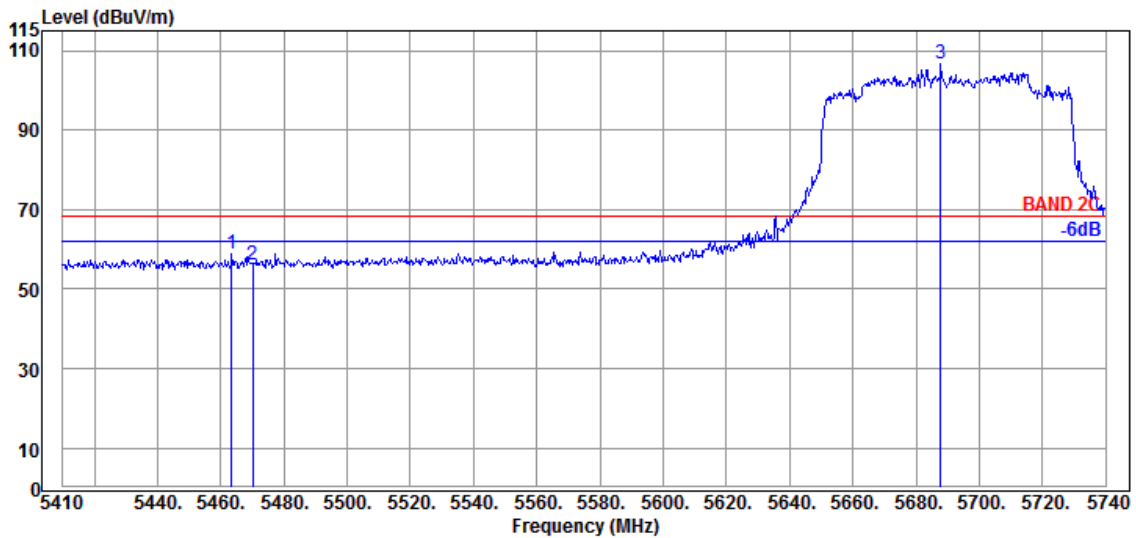


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.460	34.60	9.05	34.21	49.31	58.75	68.20	9.45	Peak
5470.060	34.63	9.06	34.21	46.72	56.20	68.20	12.00	Peak
@ 5687.860	34.63	9.17	34.29	97.33	106.84	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

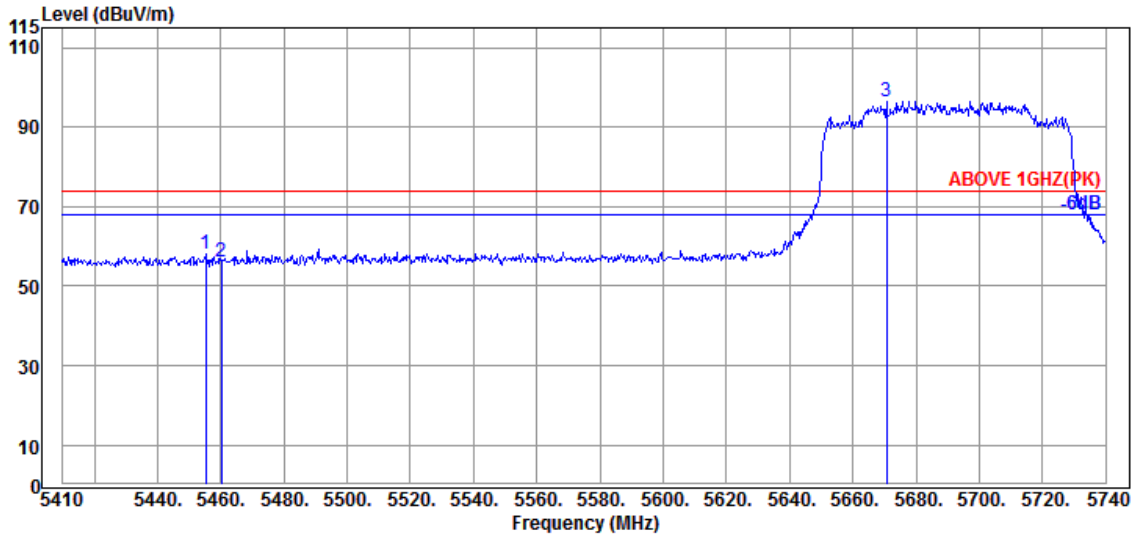

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.210	34.60	9.05	34.21	48.77	58.21	74.00	15.79	Peak
5460.160	34.60	9.05	34.21	46.75	56.19	74.00	17.81	Peak
@ 5670.700	34.57	9.16	34.29	87.03	96.47	---	---	Peak

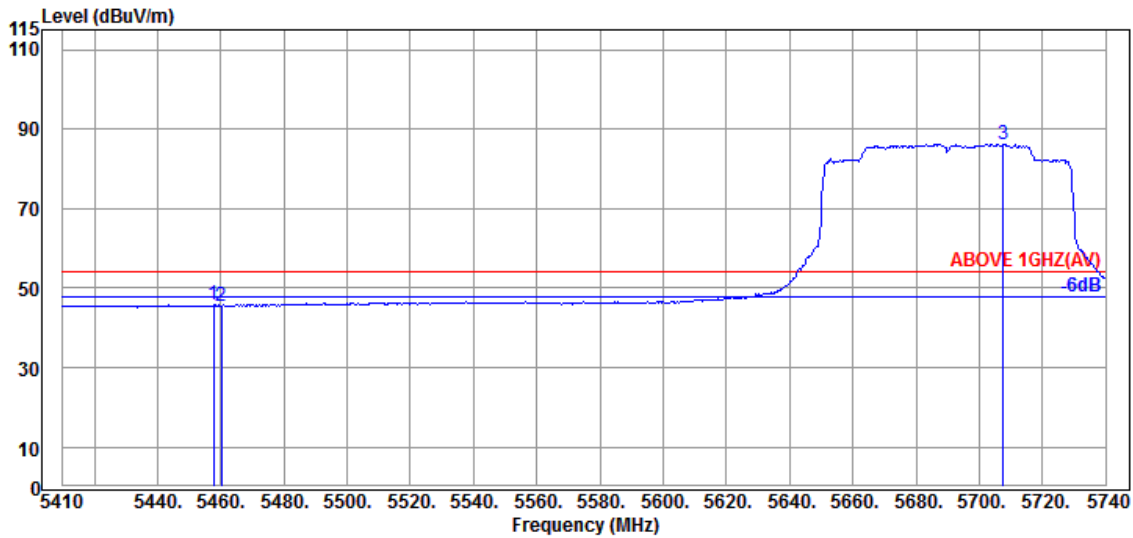


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.850	34.60	9.05	34.21	36.27	45.71	54.00	8.29	Average
5460.160	34.60	9.05	34.21	35.98	45.42	54.00	8.58	Average
@ 5707.660	34.80	9.19	34.30	76.65	86.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

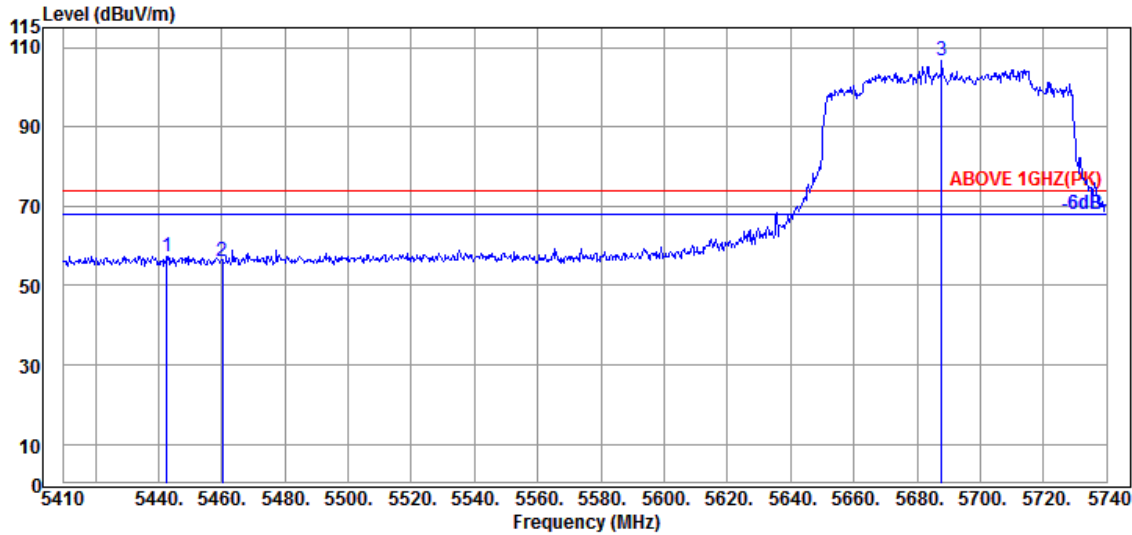

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.670	34.65	9.04	34.22	47.96	57.43	74.00	16.57	Peak
5460.160	34.60	9.05	34.21	46.68	56.12	74.00	17.88	Peak
@ 5687.860	34.63	9.17	34.29	97.33	106.84	---	---	Peak

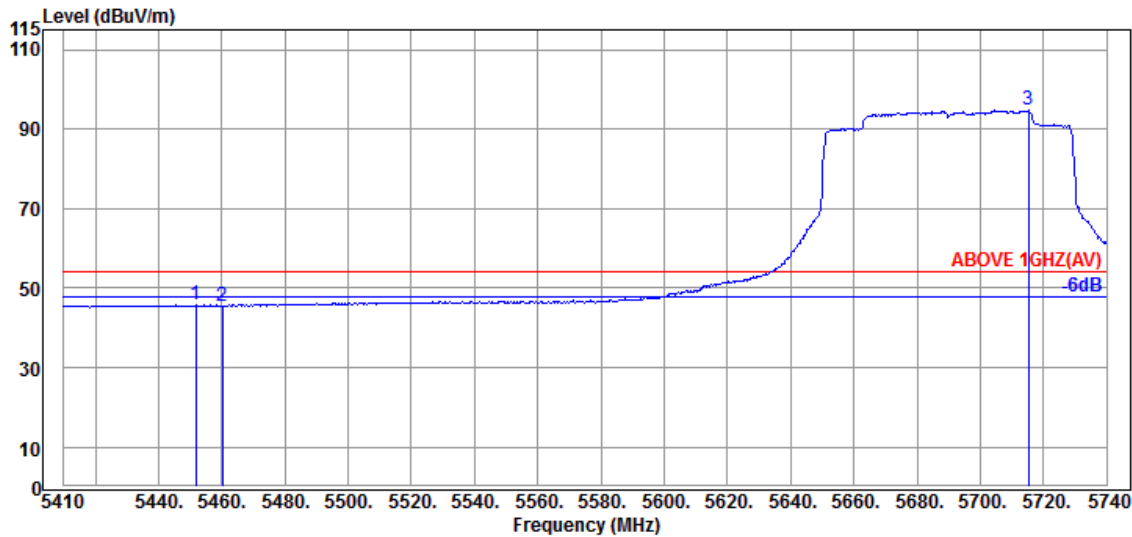


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.910	34.60	9.05	34.21	36.34	45.78	54.00	8.22	Average
5460.160	34.60	9.05	34.21	36.08	45.52	54.00	8.48	Average
@ 5715.250	34.80	9.19	34.30	84.99	94.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

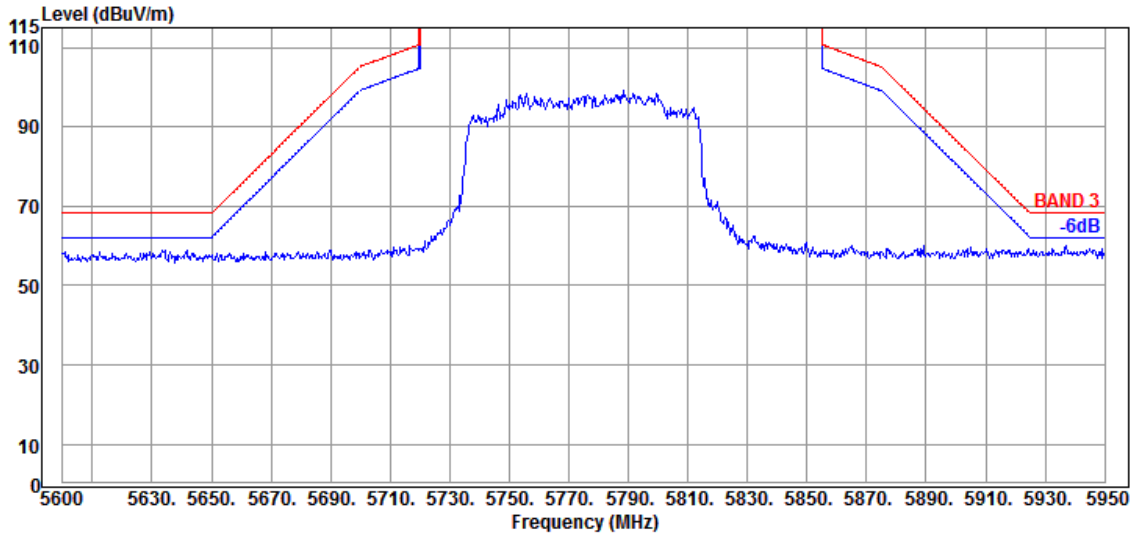

Antenna at Vertical Polarization

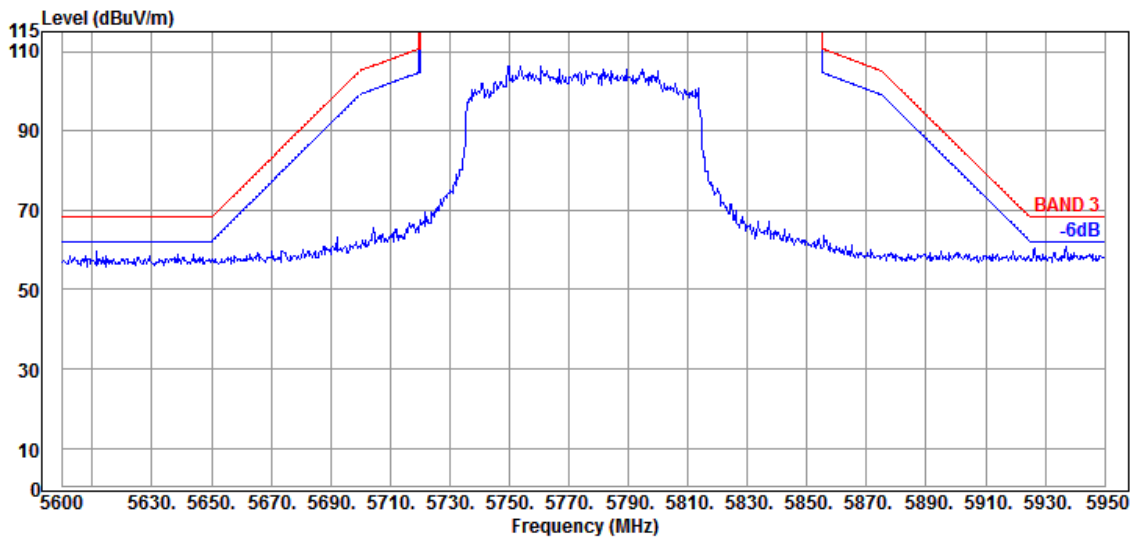


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

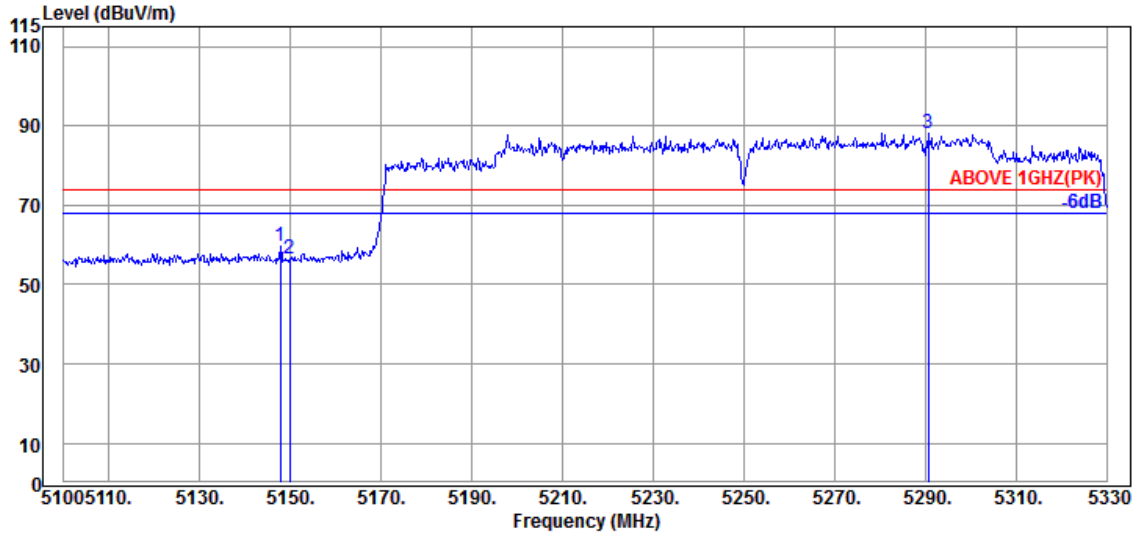

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.840	34.50	8.88	34.34	50.58	59.62	74.00	14.38	Peak
5149.910	34.50	8.88	34.34	47.59	56.63	74.00	17.37	Peak
@ 5290.670	34.43	8.96	34.28	79.15	88.26	---	---	Peak

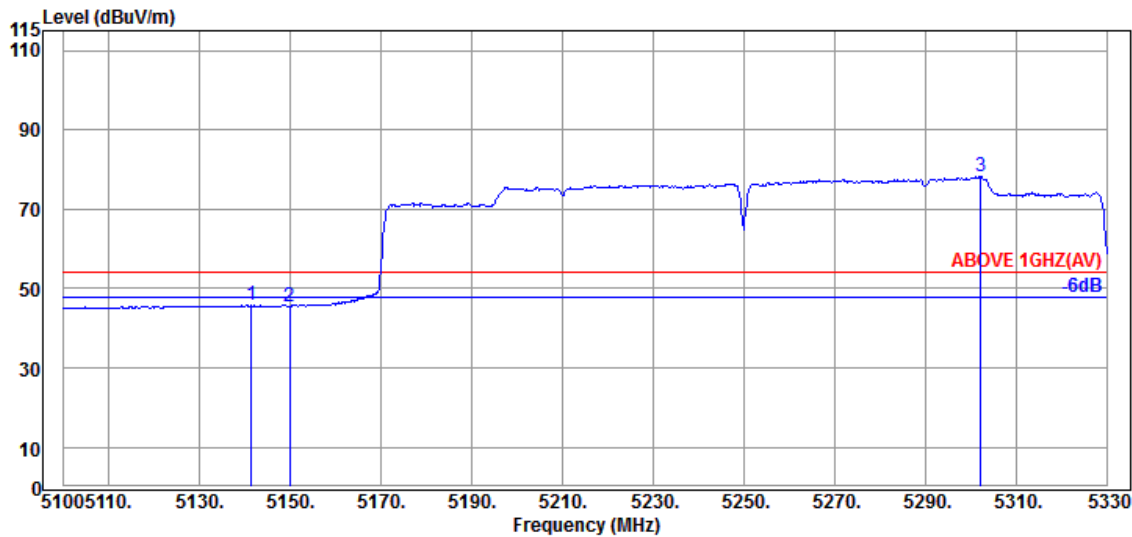


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.400	34.40	8.88	34.34	36.86	45.80	54.00	8.20	Average
5149.910	34.50	8.88	34.34	36.58	45.62	54.00	8.38	Average
@ 5302.170	34.40	8.97	34.28	69.28	78.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

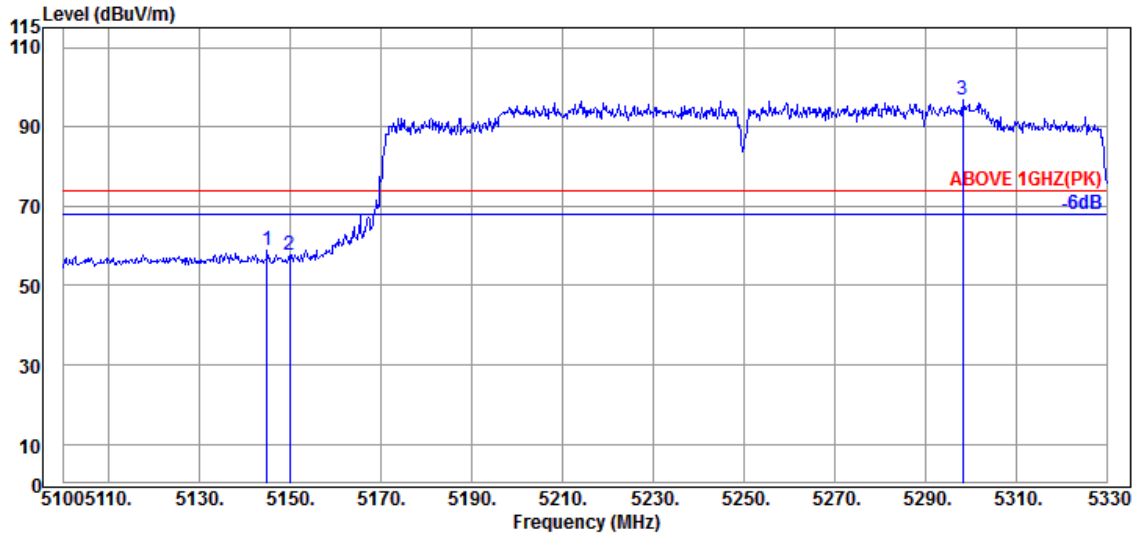

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.850	34.50	8.88	34.34	49.80	58.84	74.00	15.16	Peak
5149.910	34.50	8.88	34.34	48.53	57.57	74.00	16.43	Peak
@ 5298.260	34.40	8.97	34.28	87.76	96.85	---	---	Peak

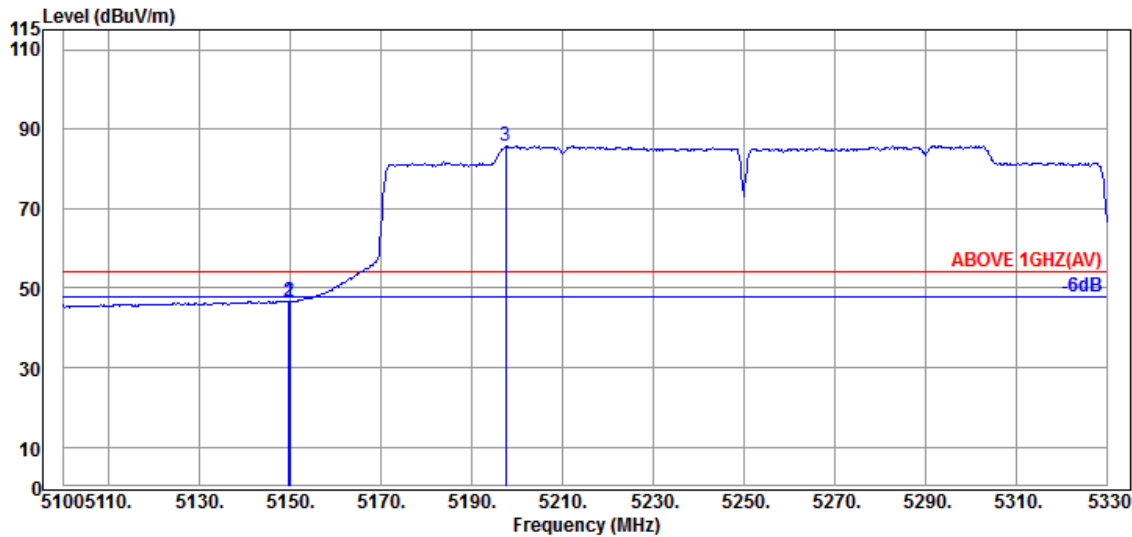


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.50	8.88	34.34	37.78	46.82	54.00	7.18	Average
5149.910	34.50	8.88	34.34	37.58	46.62	54.00	7.38	Average
@ 5197.520	34.70	8.91	34.32	76.45	85.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

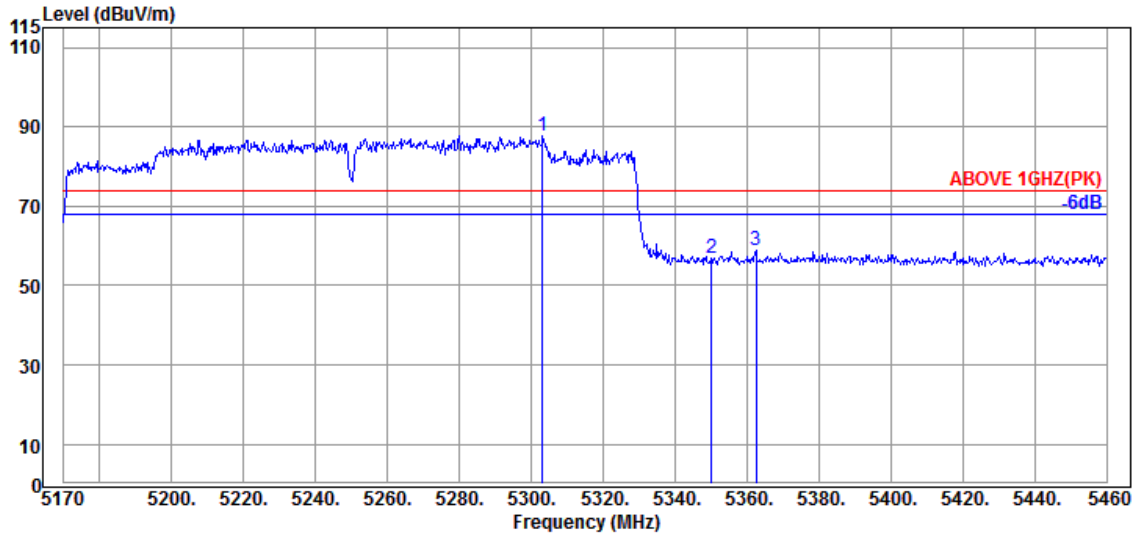

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.110	34.40	8.97	34.28	78.71	87.80	---	---	Peak
5350.090	34.90	8.99	34.26	47.31	56.94	74.00	17.06	Peak
5362.560	34.87	9.00	34.26	49.13	58.74	74.00	15.26	Peak

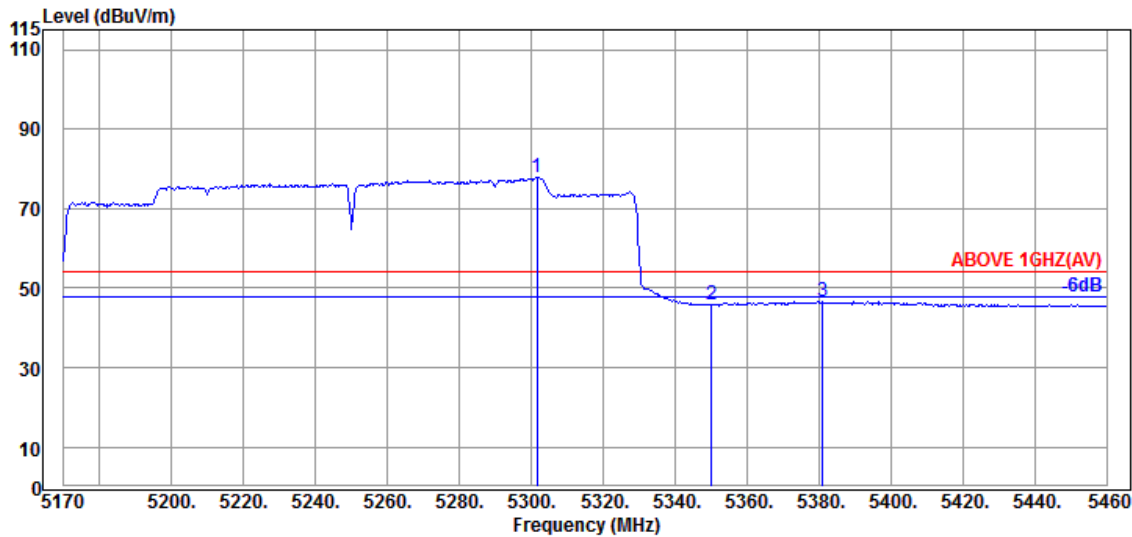


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.660	34.40	8.97	34.28	68.84	77.93	---	---	Average
5350.090	34.90	8.99	34.26	36.16	45.79	54.00	8.21	Average
5381.120	34.83	9.01	34.24	37.03	46.63	54.00	7.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

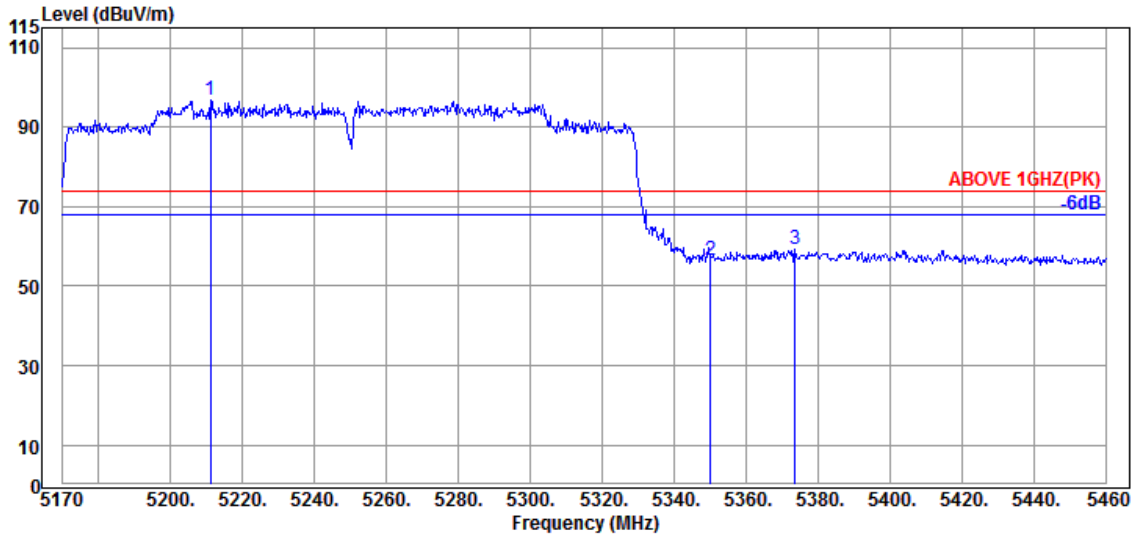

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5211.180	34.65	8.92	34.31	87.38	96.64	---	---	Peak
5350.090	34.90	8.99	34.26	46.91	56.54	74.00	17.46	Peak
5373.580	34.83	9.01	34.25	49.76	59.35	74.00	14.65	Peak

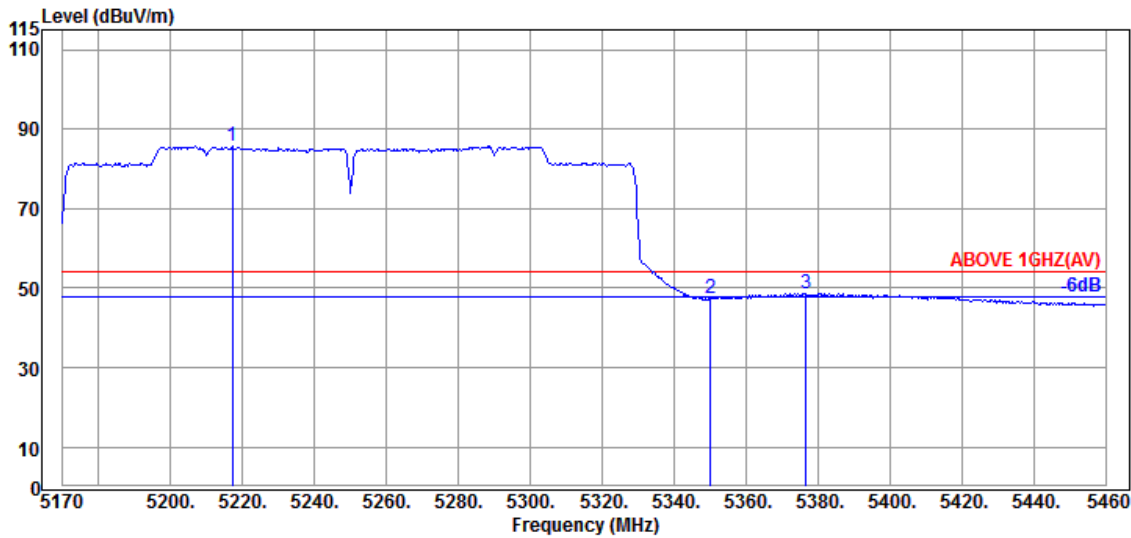


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5217.270	34.60	8.93	34.31	76.44	85.66	---	---	Average
5350.090	34.90	8.99	34.26	37.64	47.27	54.00	6.73	Average
5376.770	34.83	9.01	34.25	39.08	48.67	54.00	5.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

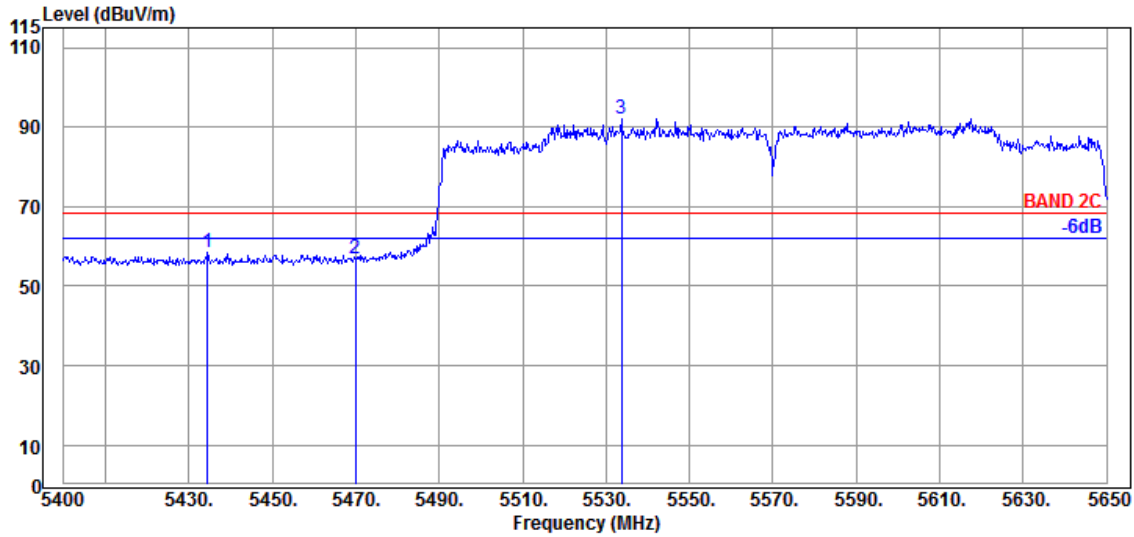

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.500	34.65	9.04	34.22	48.97	58.44	68.20	9.76	Peak
5470.000	34.63	9.06	34.21	47.30	56.78	68.20	11.42	Peak
@ 5533.750	34.70	9.09	34.22	82.63	92.20	---	---	Peak

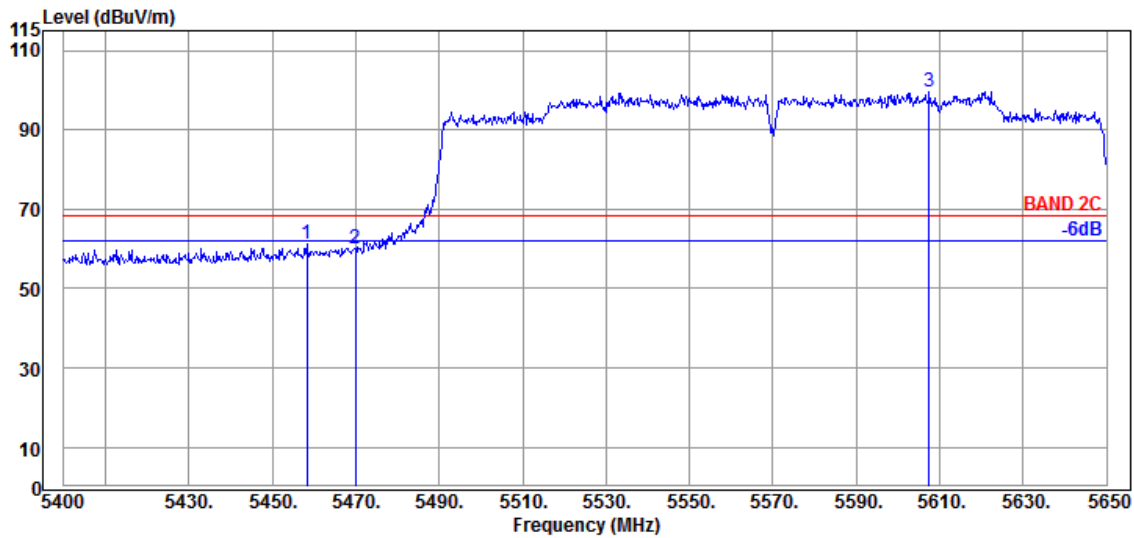


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.250	34.60	9.05	34.21	51.98	61.42	68.20	6.78	Peak
5470.000	34.63	9.06	34.21	50.72	60.20	68.20	8.00	Peak
@ 5607.500	34.40	9.13	34.25	90.42	99.70	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

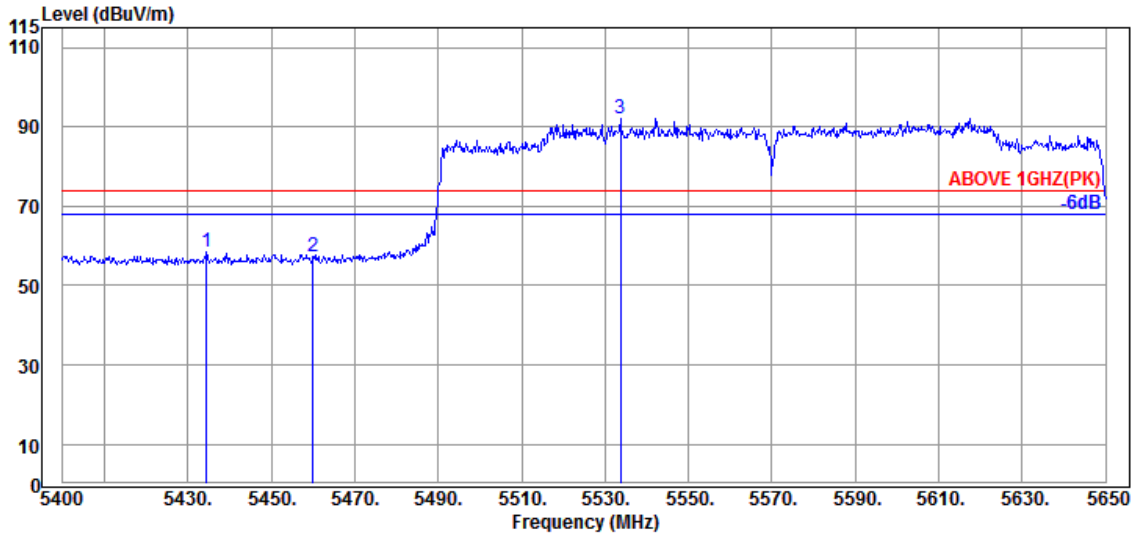

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.500	34.65	9.04	34.22	48.97	58.44	74.00	15.56	Peak
5460.000	34.60	9.05	34.21	47.91	57.35	74.00	16.65	Peak
@ 5533.750	34.70	9.09	34.22	82.63	92.20	---	---	Peak

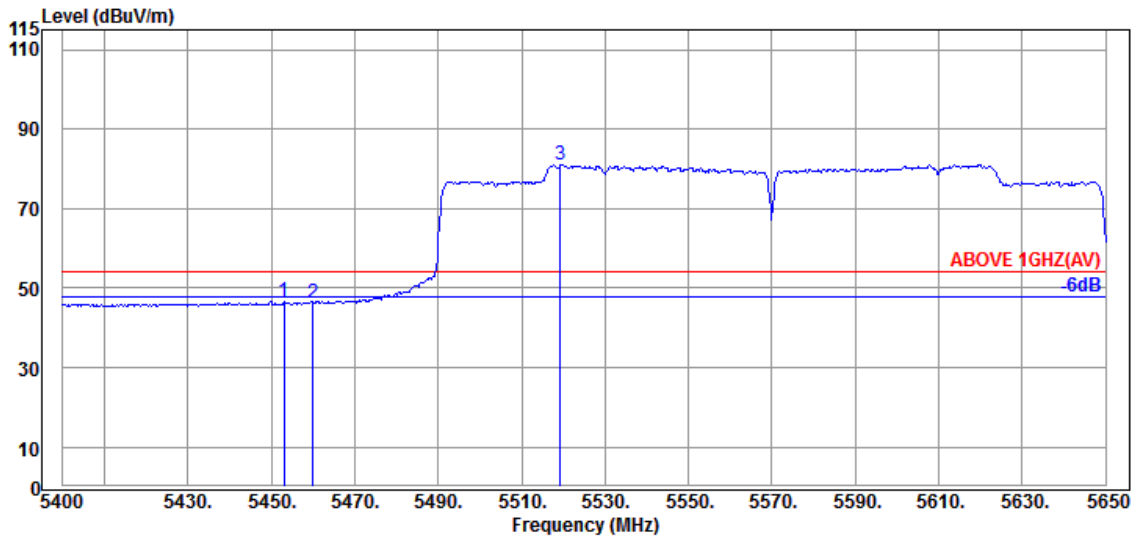


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.000	34.60	9.05	34.21	37.16	46.60	54.00	7.40	Average
5460.000	34.60	9.05	34.21	36.89	46.33	54.00	7.67	Average
@ 5519.250	34.70	9.09	34.21	71.45	81.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

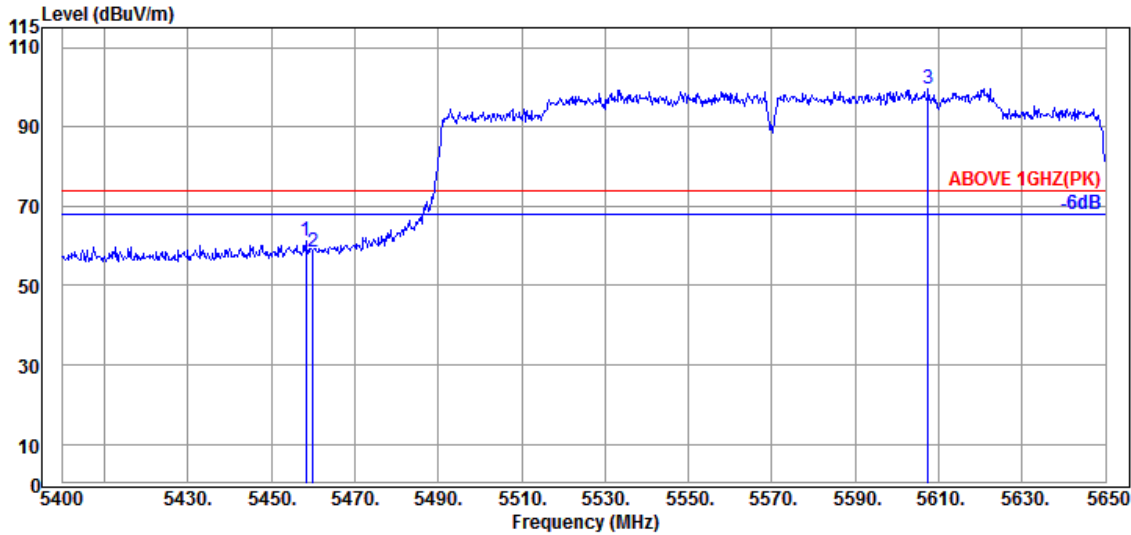

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.250	34.60	9.05	34.21	51.98	61.42	74.00	12.58	Peak
5460.000	34.60	9.05	34.21	48.87	58.31	74.00	15.69	Peak
@ 5607.500	34.40	9.13	34.25	90.42	99.70	---	---	Peak

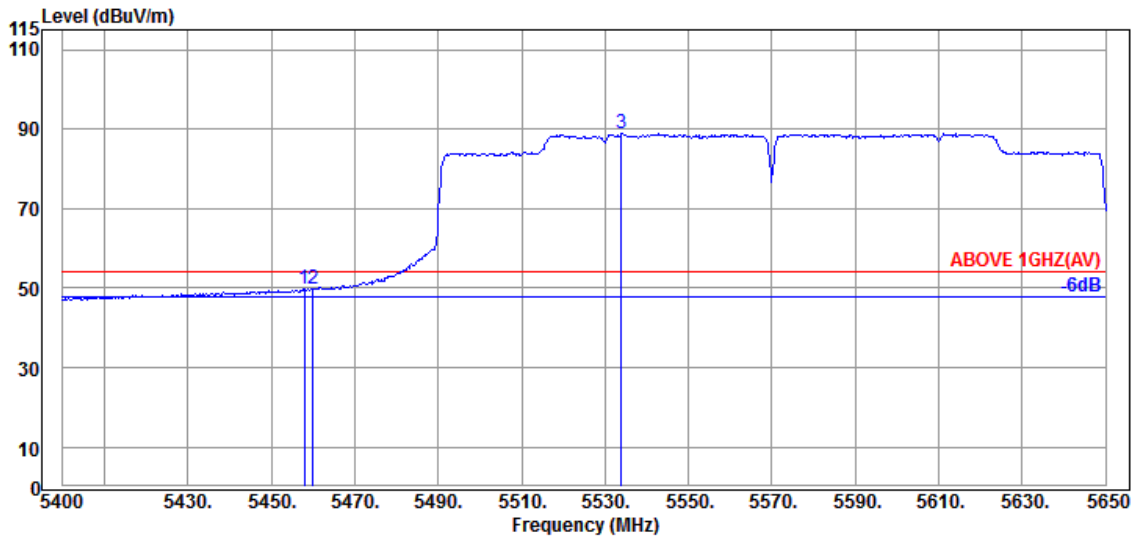


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.000	34.60	9.05	34.21	40.33	49.77	54.00	4.23	Average
5460.000	34.60	9.05	34.21	40.34	49.78	54.00	4.22	Average
@ 5534.000	34.70	9.09	34.22	79.28	88.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

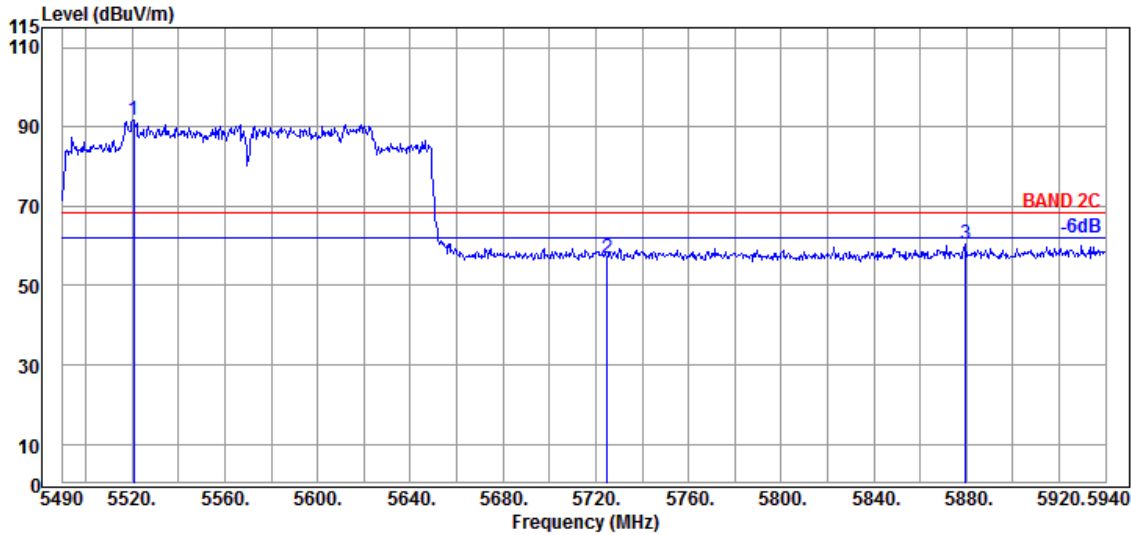

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5520.600	34.70	9.09	34.21	82.25	91.83	---	---	Peak
5724.900	34.90	9.20	34.30	47.27	57.07	68.20	11.13	Peak
5879.700	35.67	9.27	34.38	49.77	60.33	68.20	7.87	Peak

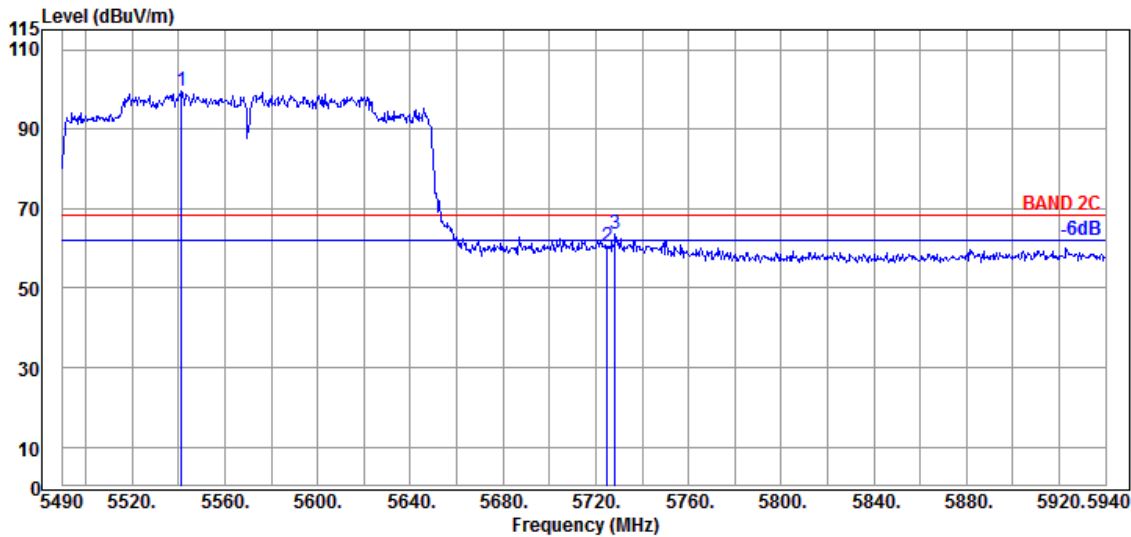

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5541.300	34.70	9.09	34.22	90.04	99.61	---	---	Peak
5724.900	34.90	9.20	34.30	50.83	60.63	68.20	7.57	Peak
5728.500	34.90	9.20	34.31	53.67	63.46	68.20	4.74	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.