

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	190
A.2.3 Emissions in Non-restricted Frequency Bands:.....	197
A.3 DTS/OCCUPIED BANDWIDTH	198
A.3.1 DTS/Occupied Bandwidth Result.....	198
A.3.2 Measurement Plots	200
A.4 MAXIMUM PEAK OUTPUT POWER	216
A.4.1 Peak Output Power	216
A.4.2 Average Output Power (Reporting only).....	224
A.5 EMISSION LIMITATIONS	230
A.6 POWER SPECTRAL DENSITY	262
A.6.1 Power Spectral Density Result	262
A.6.2 Measurement Plots	265

A.1 CONDUCTED EMISSION

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1(with INPOAQ ANT)		

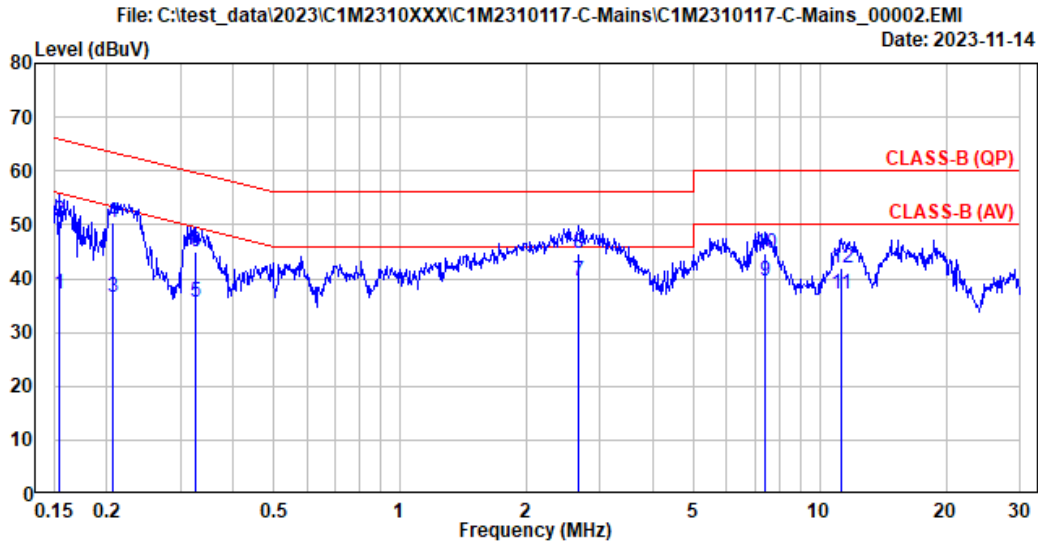

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.30	0.03	9.85	16.83	37.01	55.79	18.78	Average
2	0.154	10.30	0.03	9.85	30.40	50.58	65.79	15.21	QP
3	0.207	10.29	0.03	9.85	16.43	36.60	53.31	16.71	Average
4	0.207	10.29	0.03	9.85	30.30	50.47	63.31	12.84	QP
5	0.325	10.28	0.03	9.85	15.61	35.77	49.58	13.81	Average
6	0.325	10.28	0.03	9.85	24.82	44.98	59.58	14.60	QP
7	2.661	10.34	0.07	9.86	19.42	39.69	46.00	6.31	Average
8	2.661	10.34	0.07	9.86	24.49	44.76	56.00	11.24	QP
9	7.430	10.50	0.11	9.87	19.17	39.65	50.00	10.35	Average
10	7.430	10.50	0.11	9.87	24.31	44.79	60.00	15.21	QP
11	11.238	10.64	0.15	9.90	16.38	37.07	50.00	12.93	Average
12	11.238	10.64	0.15	9.90	21.37	42.06	60.00	17.94	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1(with INPOAQ ANT)		

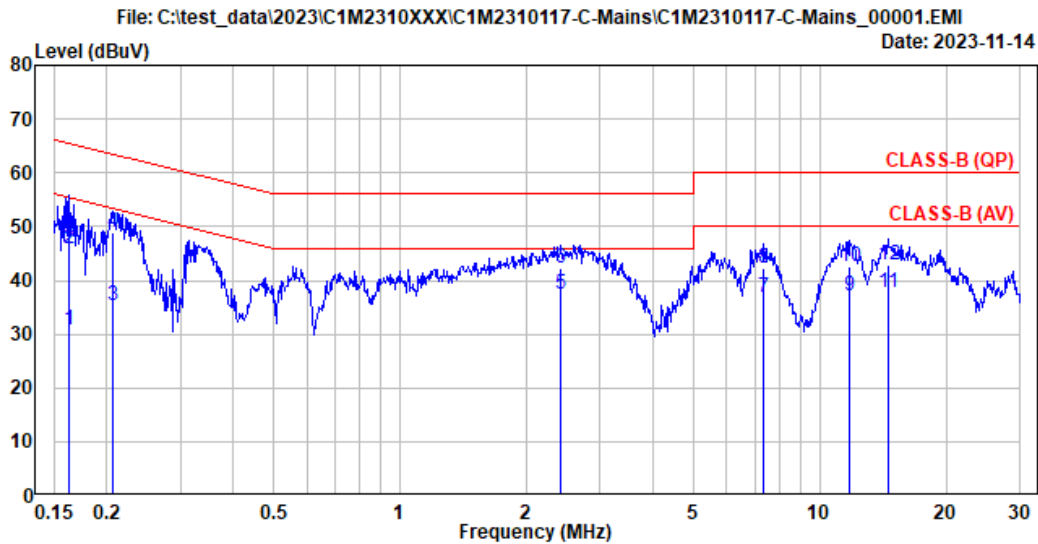

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16290SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.29	0.03	9.85	10.52	30.69	55.34	24.65	Average
2	0.162	10.29	0.03	9.85	25.70	45.87	65.34	19.47	QP
3	0.207	10.28	0.03	9.85	15.27	35.43	53.31	17.88	Average
4	0.207	10.28	0.03	9.85	28.79	48.95	63.31	14.36	QP
5	2.421	10.31	0.07	9.86	17.07	37.31	46.00	8.69	Average
6	2.421	10.31	0.07	9.86	21.92	42.16	56.00	13.84	QP
7	7.320	10.42	0.11	9.87	16.34	36.74	50.00	13.26	Average
8	7.320	10.42	0.11	9.87	21.74	42.14	60.00	17.86	QP
9	11.812	10.52	0.15	9.90	16.63	37.20	50.00	12.80	Average
10	11.812	10.52	0.15	9.90	22.03	42.60	60.00	17.40	QP
11	14.563	10.60	0.17	9.91	17.08	37.76	50.00	12.24	Average
12	14.563	10.60	0.17	9.91	22.28	42.96	60.00	17.04	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2(with LUXSHARE-ICT ANT)		

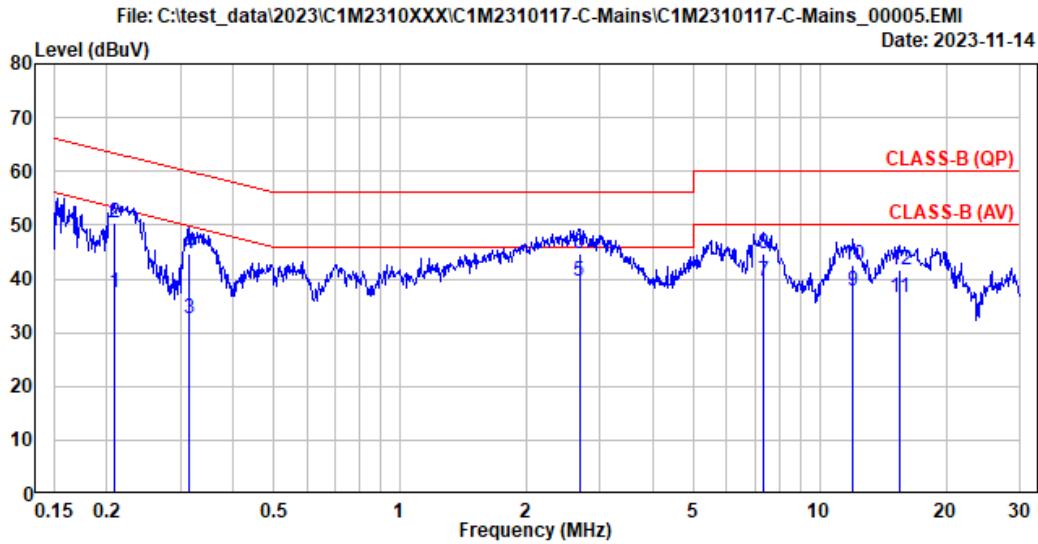


Site No.	: No.8 Shielded Room	Data No.	: 5
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.208	10.29	0.03	9.85	17.27	37.44	53.27	15.83	Average
2	0.208	10.29	0.03	9.85	30.37	50.54	63.27	12.73	QP
3	0.315	10.28	0.03	9.85	12.39	32.55	49.83	17.28	Average
4	0.315	10.28	0.03	9.85	24.40	44.56	59.83	15.27	QP
5	2.675	10.34	0.07	9.86	19.40	39.67	46.00	6.33	Average
6	2.675	10.34	0.07	9.86	24.49	44.76	56.00	11.24	QP
7	7.320	10.50	0.11	9.87	19.14	39.62	50.00	10.38	Average
8	7.320	10.50	0.11	9.87	24.31	44.79	60.00	15.21	QP
9	11.990	10.68	0.15	9.90	16.95	37.68	50.00	12.32	Average
10	11.990	10.68	0.15	9.90	21.87	42.60	60.00	17.40	QP
11	15.460	10.83	0.17	9.91	15.67	36.58	50.00	13.42	Average
12	15.460	10.83	0.17	9.91	20.85	41.76	60.00	18.24	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2(with LUXSHARE-ICT ANT)		

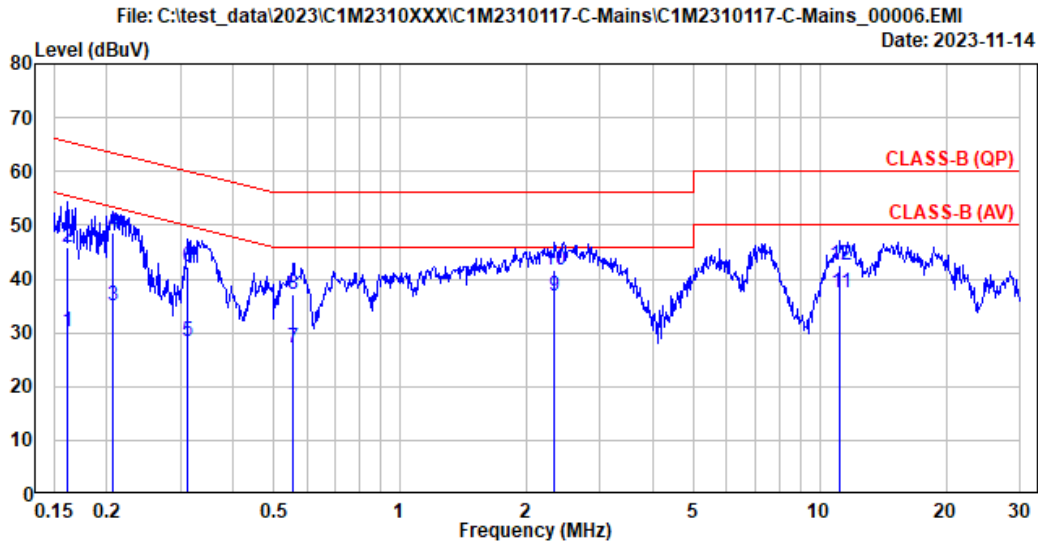

Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.161	10.30	0.03	9.85	10.13	30.31	55.42	25.11	Average
2	0.161	10.30	0.03	9.85	25.84	46.02	65.42	19.40	QP
3	0.207	10.28	0.03	9.85	14.82	34.98	53.31	18.33	Average
4	0.207	10.28	0.03	9.85	28.46	48.62	63.31	14.69	QP
5	0.312	10.27	0.03	9.85	8.23	28.38	49.91	21.53	Average
6	0.312	10.27	0.03	9.85	22.08	42.23	59.91	17.68	QP
7	0.554	10.27	0.03	9.85	6.92	27.07	46.00	18.93	Average
8	0.554	10.27	0.03	9.85	16.83	36.98	56.00	19.02	QP
9	2.338	10.31	0.06	9.86	16.63	36.86	46.00	9.14	Average
10	2.338	10.31	0.06	9.86	21.33	41.56	56.00	14.44	QP
11	11.182	10.50	0.15	9.90	16.86	37.41	50.00	12.59	Average
12	11.182	10.50	0.15	9.90	21.89	42.44	60.00	17.56	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

A.2 RADIATED EMISSION

Test Date	2023/10/20 ~ 11/14	Temp./Hum.	23 ~ 25°C/52 ~ 59%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	36.73	33.73	40.00	6.27	Peak
148.825	16.64	2.86	26.02	43.24	36.72	43.50	6.78	Peak
206.217	15.67	3.46	25.80	36.37	29.71	43.50	13.79	Peak
445.483	22.32	5.94	26.82	40.36	41.79	46.00	4.21	Peak
520.658	23.41	6.48	27.22	33.07	35.74	46.00	10.26	Peak
616.850	24.40	6.86	27.41	32.65	36.50	46.00	9.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	14.12	37.62	40.00	2.38	QP
78.500	12.89	2.02	26.37	42.49	31.02	40.00	8.98	Peak
148.825	16.64	2.86	26.02	45.49	38.96	43.50	4.54	Peak
345.250	20.22	4.92	26.08	35.39	34.46	46.00	11.54	Peak
445.483	22.32	5.94	26.82	41.00	42.43	46.00	3.57	Peak
540.058	23.63	6.55	27.27	33.09	36.01	46.00	9.99	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.042	22.48	1.28	26.51	37.34	34.59	40.00	5.41	Peak
148.825	16.64	2.86	26.02	44.02	37.49	43.50	6.01	Peak
207.025	15.72	3.47	25.80	37.24	30.64	43.50	12.86	Peak
321.808	19.55	4.64	25.87	33.96	32.28	46.00	13.72	Peak
445.483	22.32	5.94	26.82	40.62	42.05	46.00	3.95	Peak
523.083	23.43	6.49	27.22	33.39	36.08	46.00	9.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	14.11	37.62	40.00	2.38	QP
80.117	13.03	2.04	26.37	42.40	31.10	40.00	8.90	Peak
148.825	16.64	2.86	26.02	45.28	38.76	43.50	4.74	Peak
345.250	20.22	4.92	26.08	34.76	33.82	46.00	12.18	Peak
445.483	22.32	5.94	26.82	40.85	42.29	46.00	3.71	Peak
594.217	24.27	6.74	27.40	34.32	37.94	46.00	8.06	Peak

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	32.01	29.01	40.00	10.99	Peak
148.825	16.64	2.86	26.02	43.90	37.38	43.50	6.12	Peak
323.425	19.59	4.66	25.88	33.90	32.27	46.00	13.73	Peak
445.483	22.32	5.94	26.82	40.54	41.97	46.00	4.03	Peak
505.300	23.19	6.42	27.17	33.27	35.71	46.00	10.29	Peak
594.217	24.27	6.74	27.40	32.72	36.34	46.00	9.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.658	21.78	1.31	0.00	14.49	37.58	40.00	2.42	QP
82.542	13.50	2.07	26.36	41.34	30.56	40.00	9.44	Peak
148.825	16.64	2.86	26.02	45.48	38.96	43.50	4.54	Peak
345.250	20.22	4.92	26.08	33.80	32.86	46.00	13.14	Peak
445.483	22.32	5.94	26.82	40.80	42.23	46.00	3.77	Peak
594.217	24.27	6.74	27.40	33.70	37.31	46.00	8.69	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.233	22.77	1.27	26.52	32.10	29.62	40.00	10.38	Peak
148.825	16.64	2.86	26.02	43.48	36.95	43.50	6.55	Peak
316.958	19.42	4.58	25.82	34.37	32.55	46.00	13.45	Peak
445.483	22.32	5.94	26.82	40.73	42.16	46.00	3.84	Peak
548.950	23.76	6.58	27.29	32.47	35.52	46.00	10.48	Peak
636.250	24.47	6.97	27.41	32.77	36.80	46.00	9.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	13.67	37.17	40.00	2.83	QP
80.925	13.17	2.05	26.36	41.64	30.49	40.00	9.51	Peak
148.825	16.64	2.86	26.02	45.22	38.70	43.50	4.80	Peak
445.483	22.32	5.94	26.82	40.52	41.95	46.00	4.05	Peak
594.217	24.27	6.74	27.40	34.57	38.19	46.00	7.81	Peak
698.492	24.68	7.29	27.40	32.77	37.35	46.00	8.65	Peak

Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	37.71	34.70	40.00	5.30	Peak
148.825	16.64	2.86	26.02	43.44	36.92	43.50	6.58	Peak
314.533	19.36	4.55	25.80	34.19	32.30	46.00	13.70	Peak
422.042	21.94	5.72	26.67	33.21	34.21	46.00	11.79	Peak
445.483	22.32	5.94	26.82	41.11	42.54	46.00	3.46	Peak
603.108	24.34	6.78	27.41	31.72	35.43	46.00	10.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	13.69	37.19	40.00	2.81	QP
77.692	12.82	2.01	26.38	42.65	31.10	40.00	8.90	Peak
127.808	17.59	2.62	26.13	36.41	30.49	43.50	13.01	Peak
148.825	16.64	2.86	26.02	45.10	38.58	43.50	4.92	Peak
445.483	22.32	5.94	26.82	40.90	42.34	46.00	3.66	Peak
594.217	24.27	6.74	27.40	34.88	38.50	46.00	7.50	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.658	21.78	1.31	26.51	38.16	34.74	40.00	5.26	Peak
148.825	16.64	2.86	26.02	43.37	36.84	43.50	6.66	Peak
207.833	15.77	3.48	25.80	35.77	29.22	43.50	14.28	Peak
317.767	19.44	4.59	25.83	34.23	32.43	46.00	13.57	Peak
445.483	22.32	5.94	26.82	40.93	42.37	46.00	3.63	Peak
521.467	23.41	6.48	27.22	32.46	35.14	46.00	10.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	13.88	37.39	40.00	2.61	QP
79.308	12.95	2.03	26.37	42.17	30.78	40.00	9.22	Peak
124.575	17.70	2.59	26.15	35.46	29.60	43.50	13.90	Peak
148.825	16.64	2.86	26.02	45.05	38.53	43.50	4.97	Peak
345.250	20.22	4.92	26.08	34.34	33.40	46.00	12.60	Peak
445.483	22.32	5.94	26.82	40.78	42.21	46.00	3.79	Peak

Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	34.47	31.46	40.00	8.54	Peak
148.825	16.64	2.86	26.02	43.50	36.98	43.50	6.52	Peak
345.250	20.22	4.92	26.08	32.97	32.03	46.00	13.97	Peak
445.483	22.32	5.94	26.82	39.67	41.10	46.00	4.90	Peak
540.058	23.63	6.55	27.27	32.45	35.37	46.00	10.63	Peak
613.617	24.38	6.84	27.41	32.71	36.52	46.00	9.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	13.71	37.21	40.00	2.79	QP
81.733	13.35	2.06	26.36	42.29	31.34	40.00	8.66	Peak
148.825	16.64	2.86	26.02	45.29	38.77	43.50	4.73	Peak
345.250	20.22	4.92	26.08	33.78	32.84	46.00	13.16	Peak
445.483	22.32	5.94	26.82	40.35	41.79	46.00	4.21	Peak
594.217	24.27	6.74	27.40	34.84	38.45	46.00	7.55	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	35.41	32.41	40.00	7.59	Peak
148.825	16.64	2.86	26.02	43.75	37.22	43.50	6.28	Peak
317.767	19.44	4.59	25.83	34.01	32.22	46.00	13.78	Peak
445.483	22.32	5.94	26.82	40.09	41.52	46.00	4.48	Peak
575.625	24.06	6.68	27.35	32.95	36.33	46.00	9.67	Peak
665.350	24.58	7.12	27.40	32.30	36.60	46.00	9.40	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	3.00	16.52	37.03	40.00	2.97	QP
80.117	13.03	2.04	26.37	42.42	31.12	40.00	8.88	Peak
119.725	17.87	2.53	26.18	35.95	30.16	43.50	13.34	Peak
148.825	16.64	2.86	26.02	46.01	39.49	43.50	4.01	Peak
445.483	22.32	5.94	26.82	40.79	42.23	46.00	3.77	Peak
594.217	24.27	6.74	27.40	34.04	37.66	46.00	8.34	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

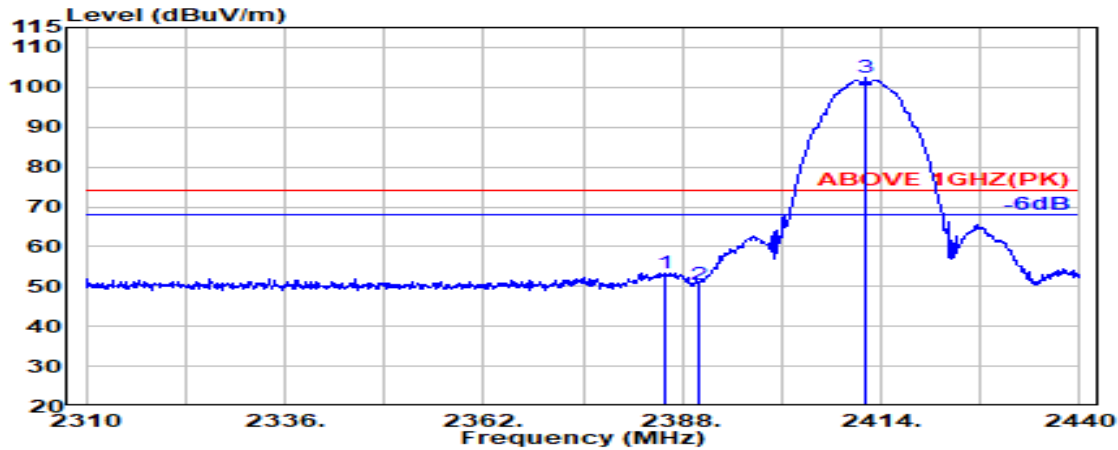

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.800	28.21	6.03	34.51	53.76	53.49	74.00	20.51	Peak
2390.000	28.18	6.03	34.51	50.90	50.61	74.00	23.39	Peak
@ 2412.000	28.17	6.07	34.51	102.67	102.40	---	---	Peak

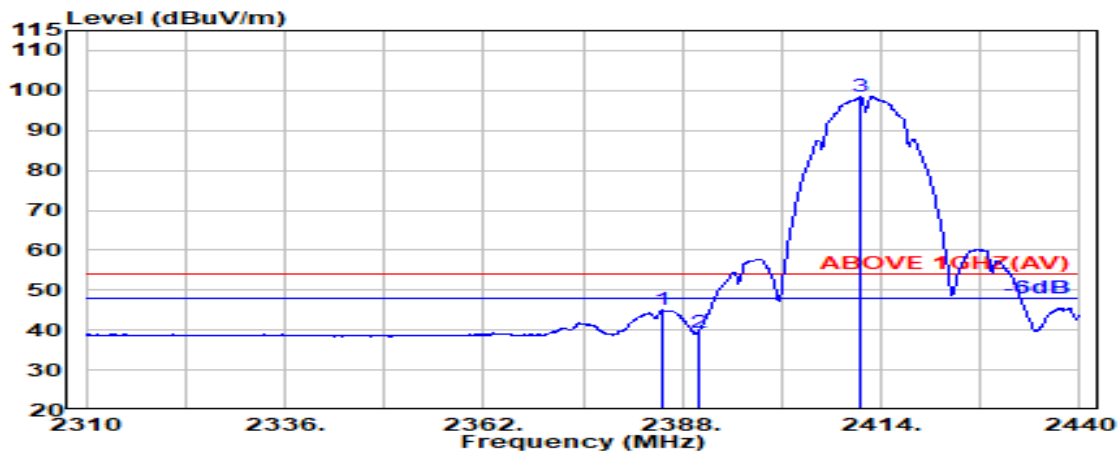


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.500	28.22	6.03	34.51	45.29	45.03	54.00	8.97	Average
2390.000	28.18	6.03	34.51	39.75	39.45	54.00	14.55	Average
@ 2411.300	28.17	6.07	34.51	98.76	98.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

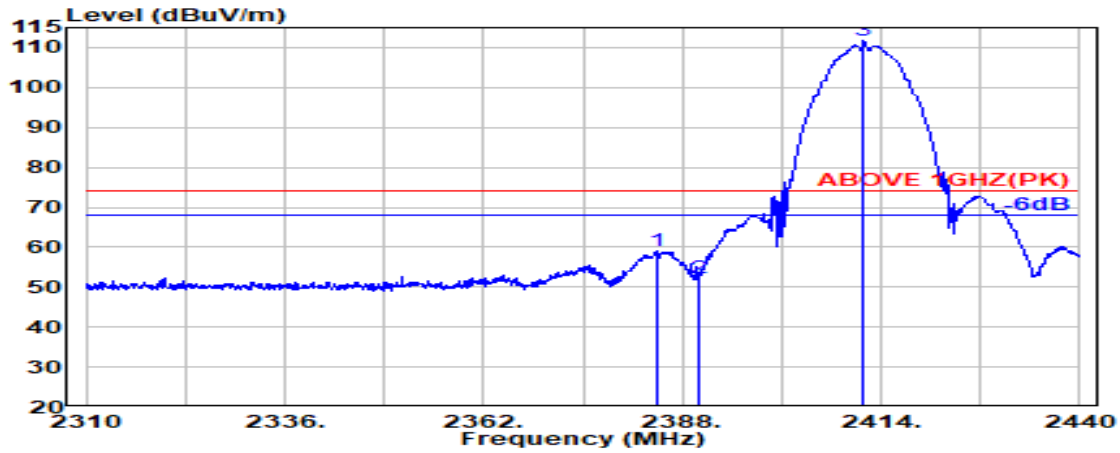

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.800	28.22	6.03	34.51	59.45	59.19	74.00	14.81	Peak
2390.000	28.18	6.03	34.51	52.52	52.23	74.00	21.77	Peak
@ 2411.700	28.17	6.07	34.51	111.99	111.71	---	---	Peak

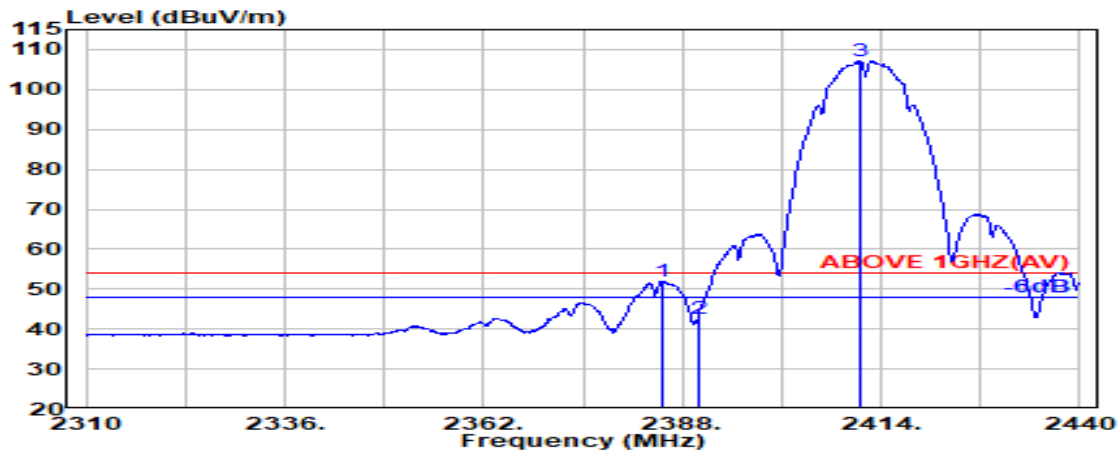


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.400	28.22	6.03	34.51	52.14	51.87	54.00	2.13	Average
2390.000	28.18	6.03	34.51	42.82	42.53	54.00	11.47	Average
@ 2411.200	28.17	6.07	34.51	107.54	107.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

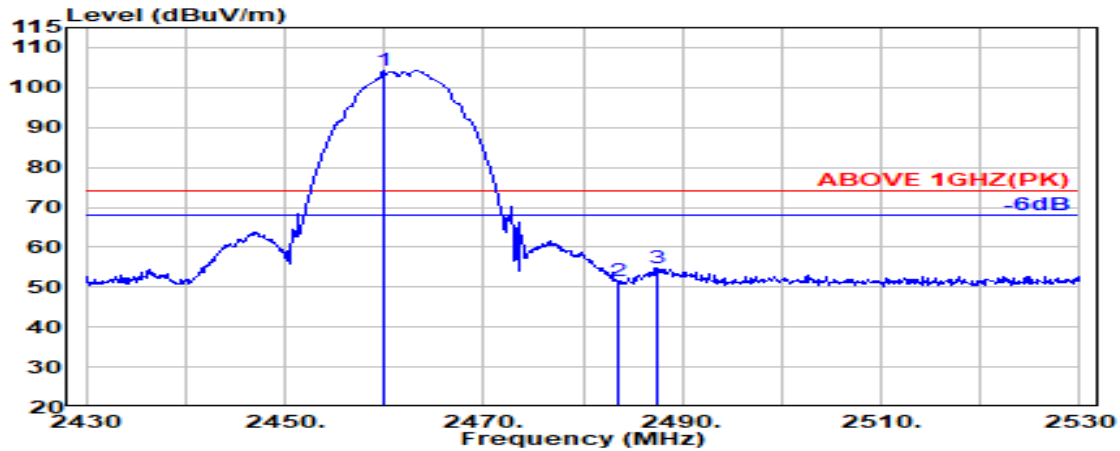

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.900	28.42	6.13	34.52	104.30	104.33	---	---	Peak
2483.500	28.47	6.17	34.53	51.58	51.69	74.00	22.31	Peak
2487.500	28.48	6.17	34.53	54.78	54.90	74.00	19.10	Peak

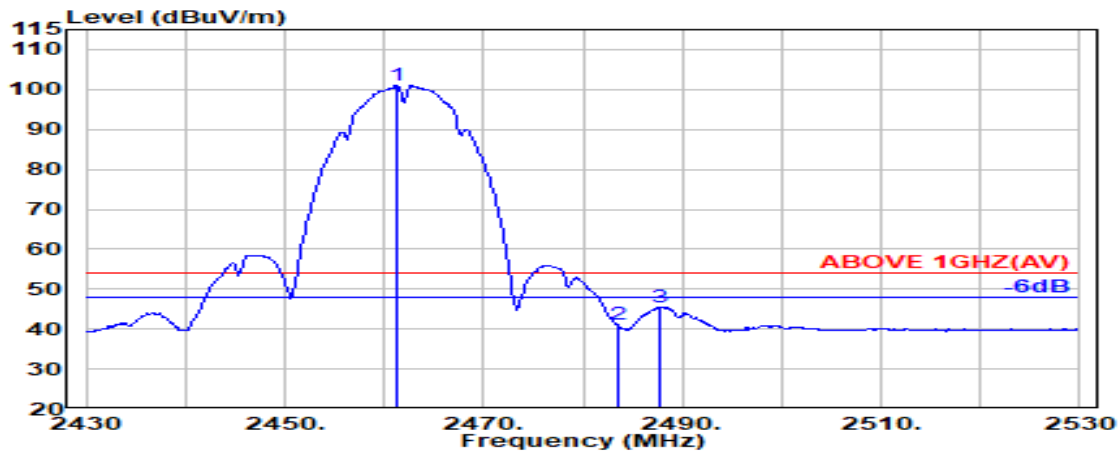


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.42	6.14	34.52	100.98	101.02	---	---	Average
2483.500	28.47	6.17	34.53	41.02	41.13	54.00	12.87	Average
2487.700	28.48	6.17	34.53	45.50	45.62	54.00	8.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

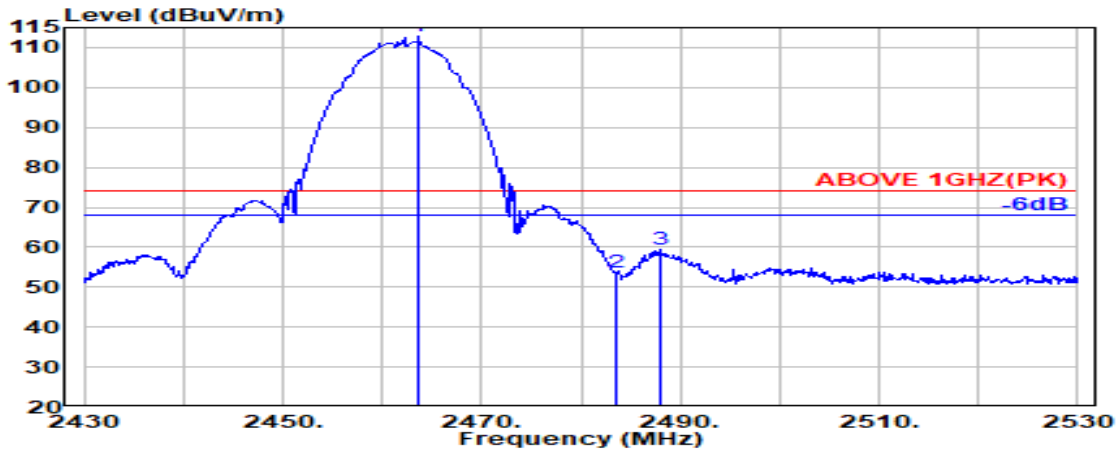

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.600	28.43	6.14	34.52	112.67	112.71	---	---	Peak
2483.500	28.47	6.17	34.53	53.45	53.56	74.00	20.44	Peak
2487.900	28.48	6.17	34.53	59.27	59.40	74.00	14.60	Peak

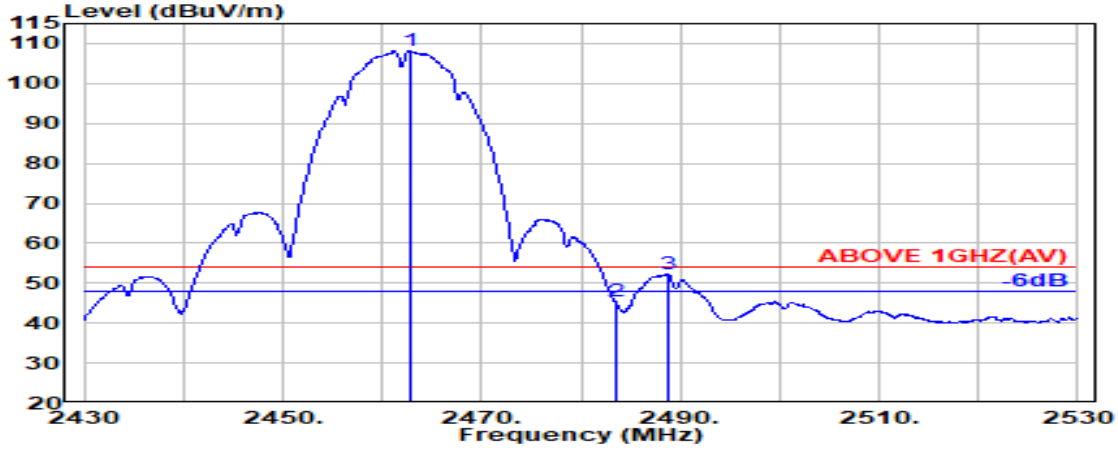


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	28.43	6.14	34.52	108.07	108.12	---	---	Average
2483.500	28.47	6.17	34.53	45.26	45.37	54.00	8.63	Average
2488.700	28.48	6.17	34.53	52.08	52.20	54.00	1.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

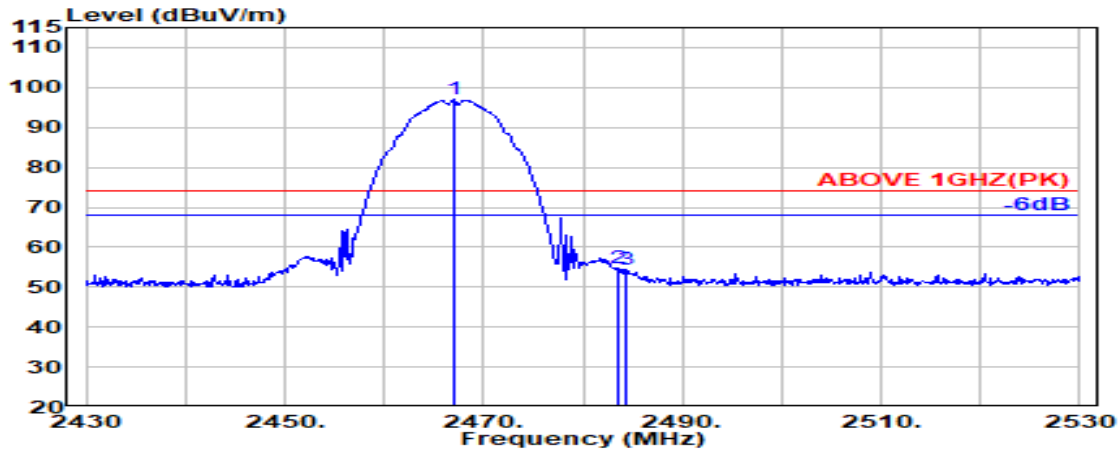

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.43	6.14	34.52	96.87	96.92	---	---	Peak
2483.500	28.47	6.17	34.53	54.60	54.70	74.00	19.30	Peak
2484.400	28.47	6.17	34.53	54.38	54.49	74.00	19.51	Peak

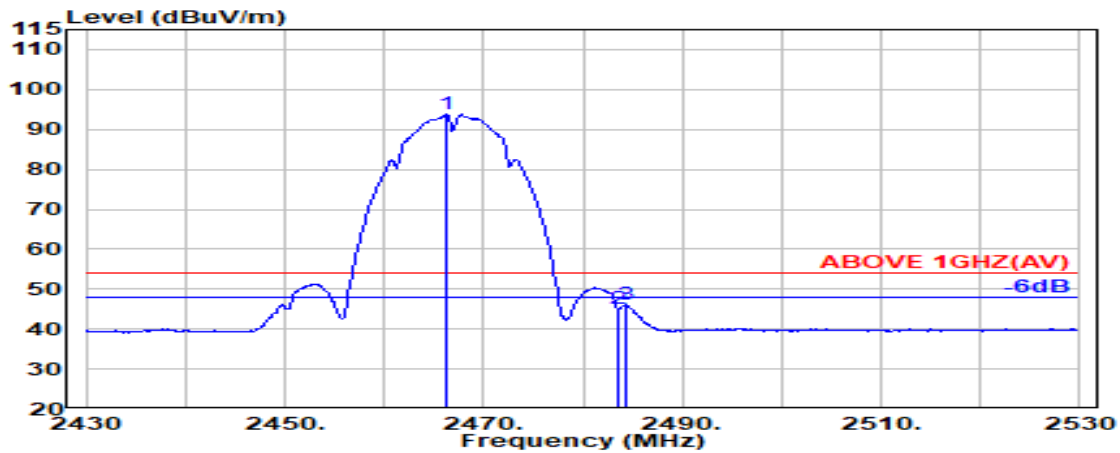


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.43	6.14	34.52	93.72	93.78	---	---	Average
2483.500	28.47	6.17	34.53	44.88	44.98	54.00	9.02	Average
2484.400	28.47	6.17	34.53	45.94	46.05	54.00	7.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

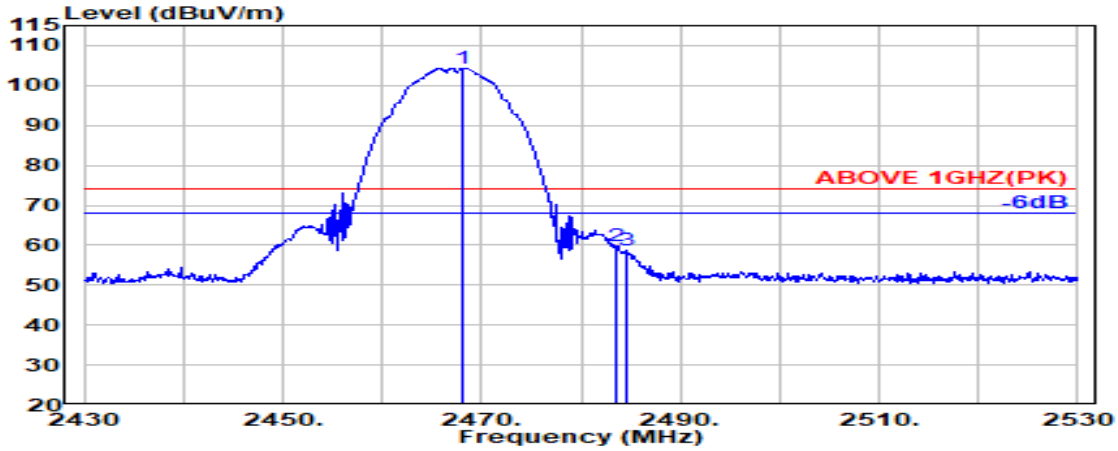

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	6.15	34.52	104.36	104.42	---	---	Peak
2483.500	28.47	6.17	34.53	59.66	59.77	74.00	14.23	Peak
2484.600	28.47	6.17	34.53	58.65	58.77	74.00	15.23	Peak

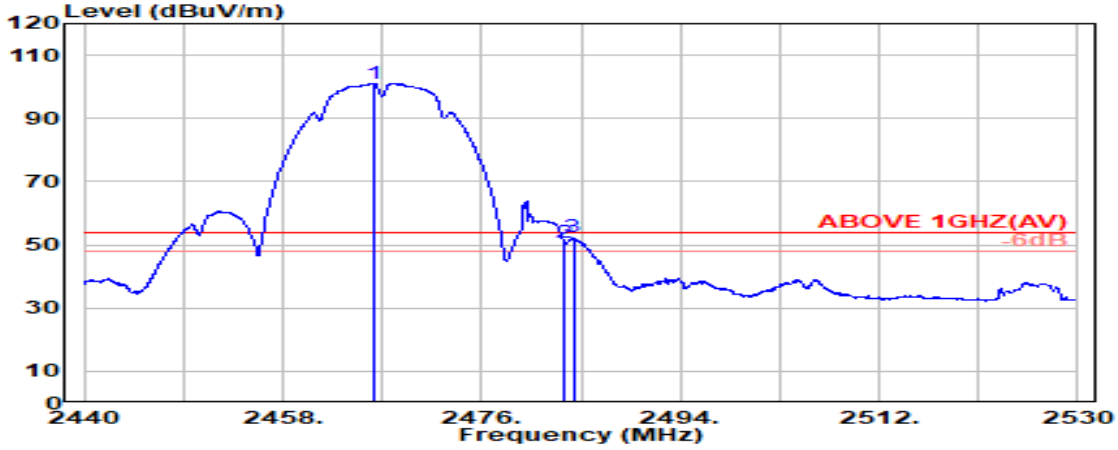


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.33	5.84	34.45	101.40	101.12	---	---	Average
2483.500	28.37	5.87	34.46	50.77	50.55	54.00	3.45	Average
2484.300	28.37	5.87	34.46	52.59	52.37	54.00	1.63	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

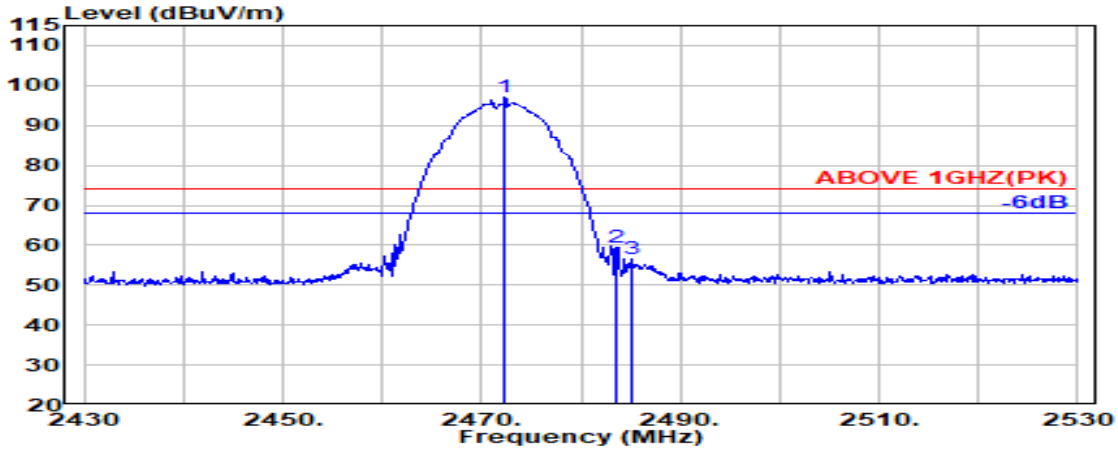

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.400	28.45	6.15	34.52	96.86	96.93	---	---	Peak
2483.500	28.47	6.17	34.53	59.45	59.56	74.00	14.44	Peak
2485.000	28.47	6.17	34.53	56.62	56.74	74.00	17.26	Peak

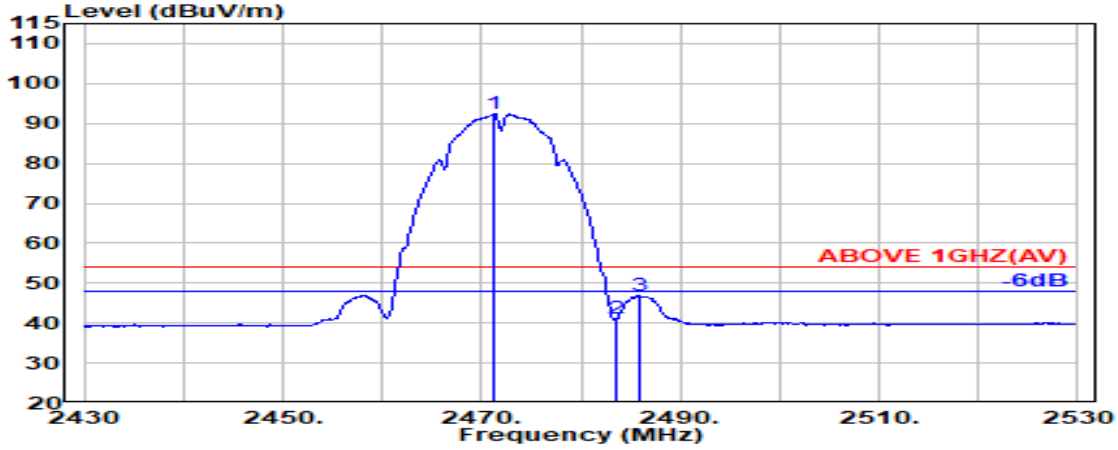


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.44	6.15	34.52	92.39	92.46	---	---	Average
2483.500	28.47	6.17	34.53	40.97	41.08	54.00	12.92	Average
2485.800	28.47	6.17	34.53	46.78	46.90	54.00	7.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

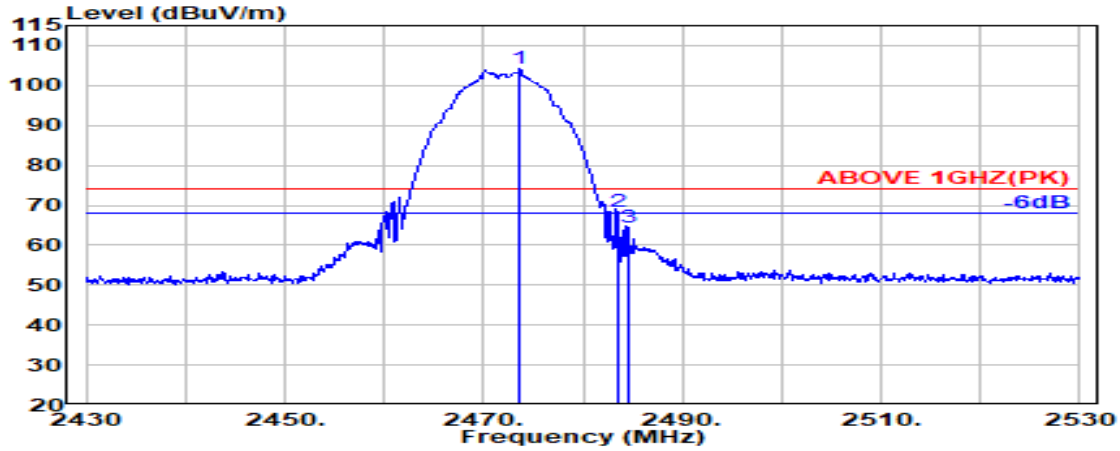

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.700	28.45	6.15	34.52	104.23	104.31	---	---	Peak
2483.500	28.47	6.17	34.53	68.26	68.37	74.00	5.63	Peak
2484.500	28.47	6.17	34.53	64.29	64.40	74.00	9.60	Peak

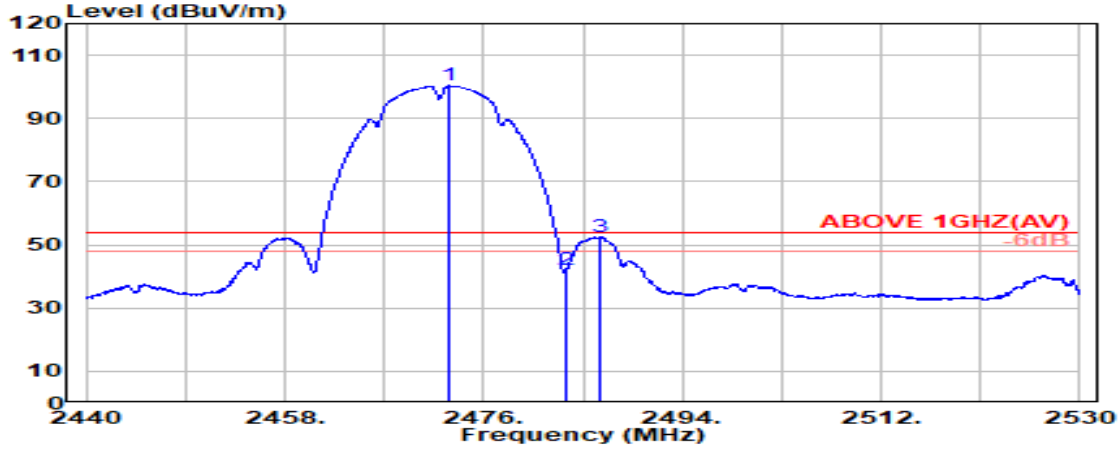


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.900	28.35	5.85	34.45	100.68	100.42	---	---	Average
2483.500	28.37	5.87	34.46	42.52	42.30	54.00	11.70	Average
2486.600	28.37	5.87	34.46	52.75	52.54	54.00	1.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

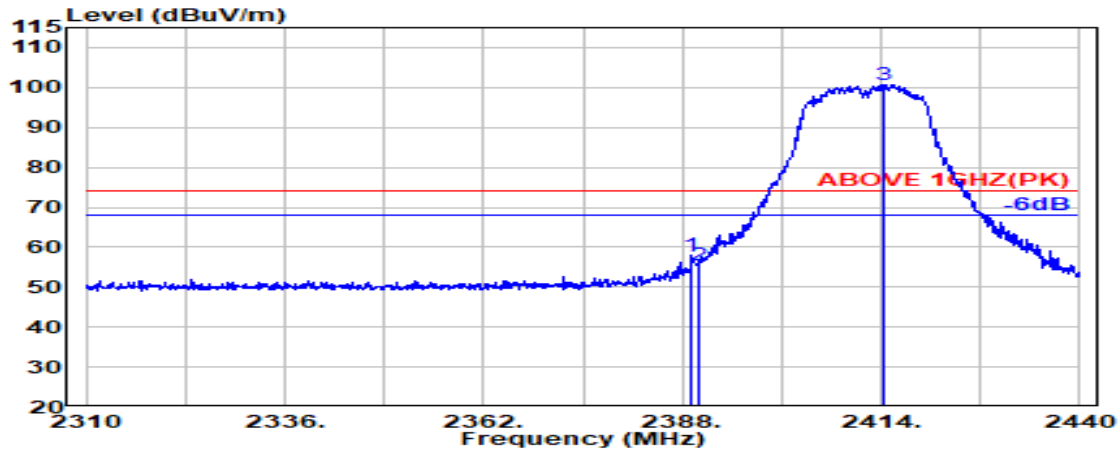

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.51	58.45	58.17	74.00	15.83	Peak
2390.000	28.18	6.03	34.51	55.73	55.44	74.00	18.56	Peak
@ 2414.500	28.19	6.07	34.51	101.09	100.84	---	---	Peak

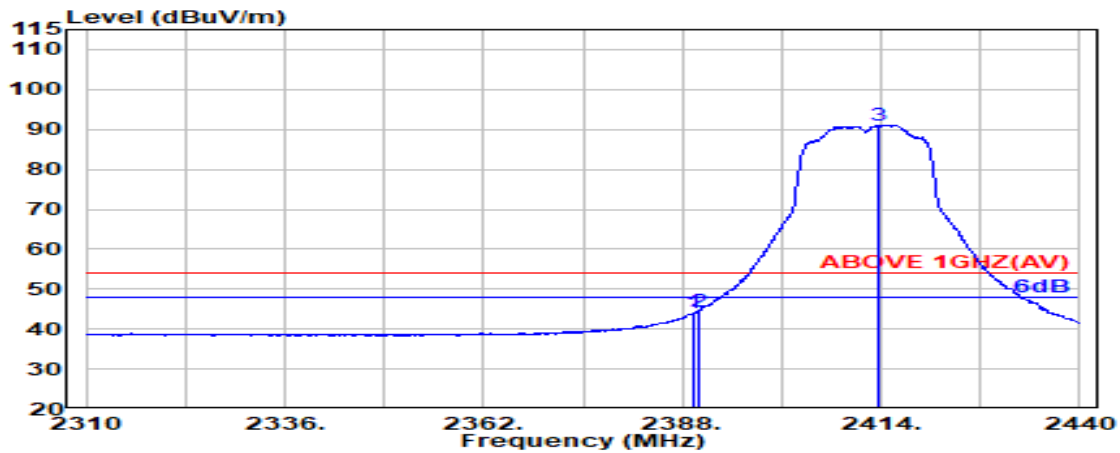


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	44.36	44.07	54.00	9.93	Average
2390.000	28.18	6.03	34.51	44.69	44.40	54.00	9.60	Average
@ 2413.600	28.18	6.07	34.51	91.42	91.16	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

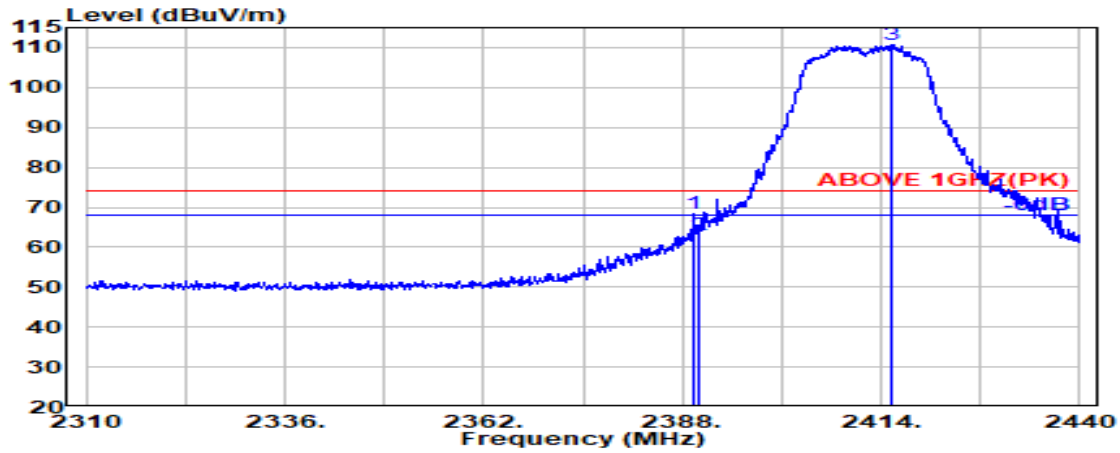

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	68.71	68.42	74.00	5.58	Peak
2390.000	28.18	6.03	34.51	63.30	63.00	74.00	11.00	Peak
@ 2415.500	28.19	6.07	34.51	111.11	110.86	---	---	Peak

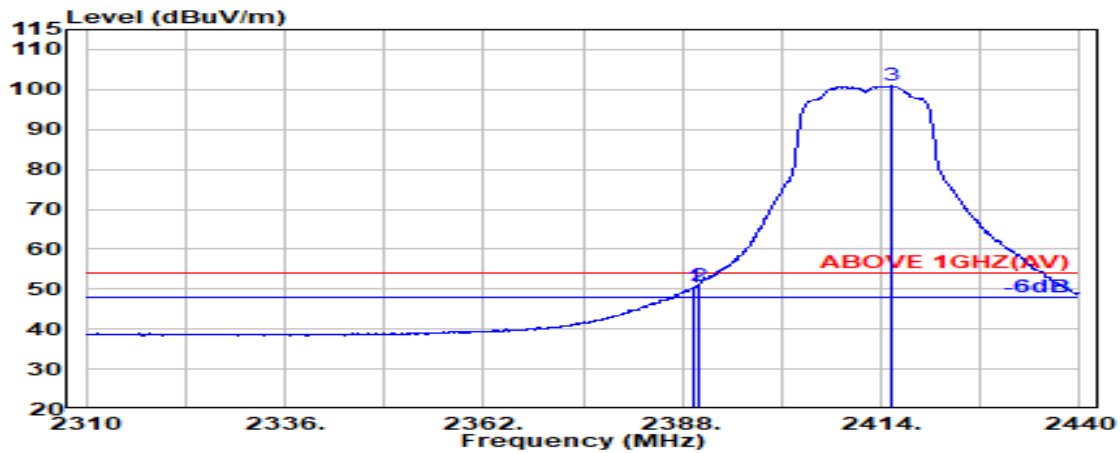


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	50.87	50.58	54.00	3.42	Average
2390.000	28.18	6.03	34.51	51.12	50.83	54.00	3.17	Average
@ 2415.500	28.19	6.07	34.51	101.28	101.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

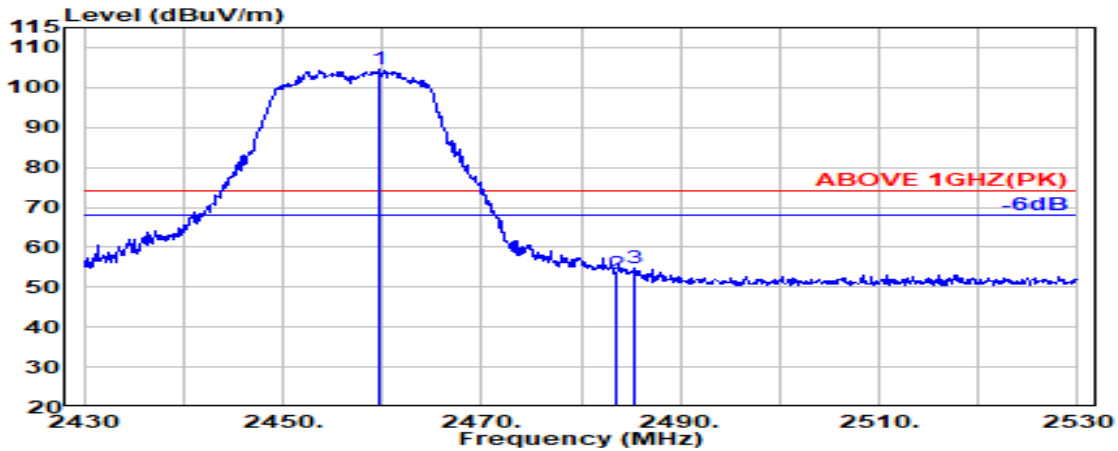

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	28.42	6.13	34.52	104.49	104.52	---	---	Peak
2483.500	28.47	6.17	34.53	53.36	53.46	74.00	20.54	Peak
2485.400	28.47	6.17	34.53	54.50	54.61	74.00	19.39	Peak

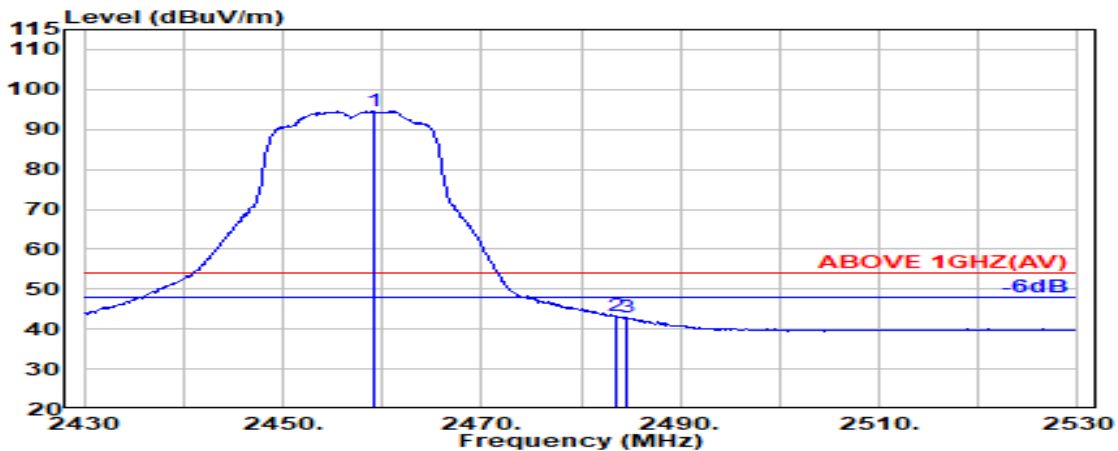


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	28.42	6.13	34.52	94.53	94.56	---	---	Average
2483.500	28.47	6.17	34.53	43.32	43.43	54.00	10.57	Average
2484.500	28.47	6.17	34.53	42.76	42.87	54.00	11.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

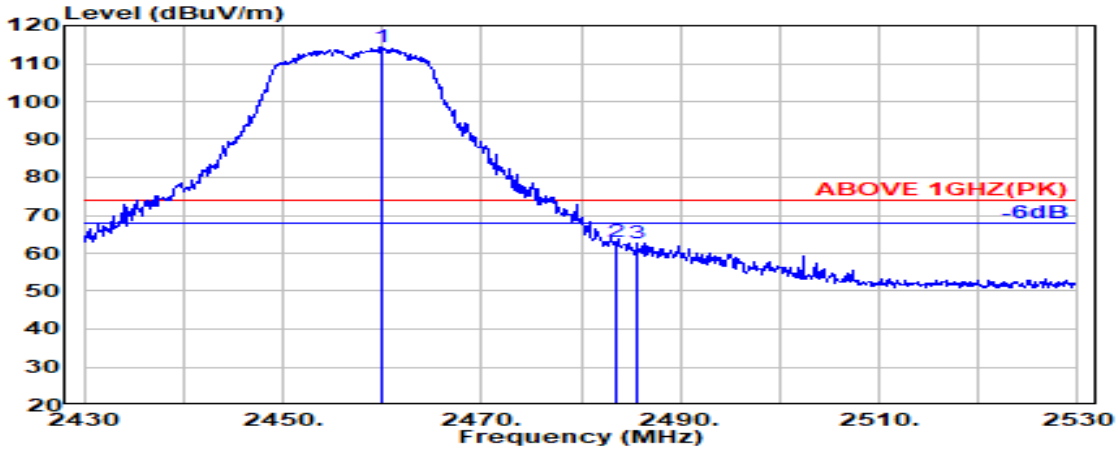

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.900	28.42	6.13	34.52	114.28	114.32	---	---	Peak
2483.500	28.47	6.17	34.53	62.74	62.84	74.00	11.16	Peak
2485.700	28.47	6.17	34.53	62.59	62.71	74.00	11.29	Peak

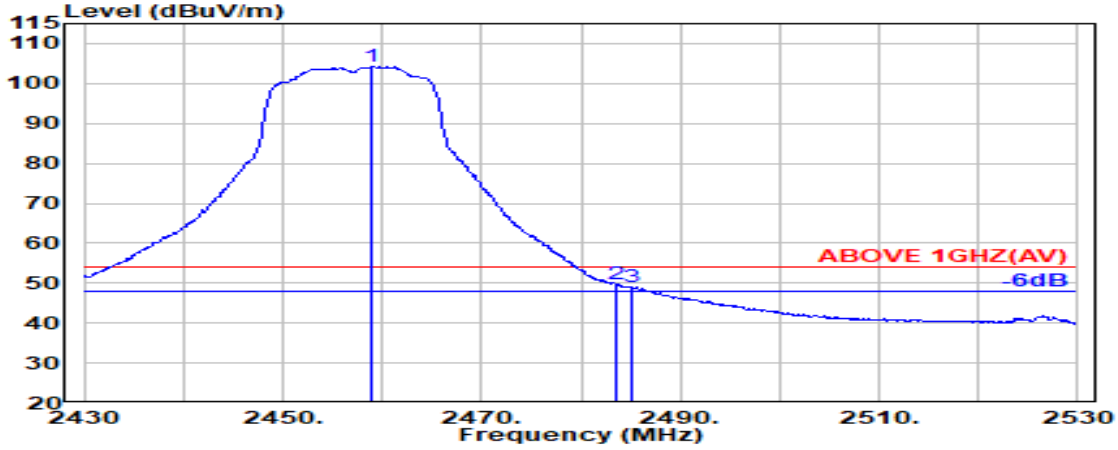


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.42	6.13	34.52	104.25	104.28	---	---	Average
2483.500	28.47	6.17	34.53	49.59	49.70	54.00	4.30	Average
2485.000	28.47	6.17	34.53	49.09	49.20	54.00	4.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

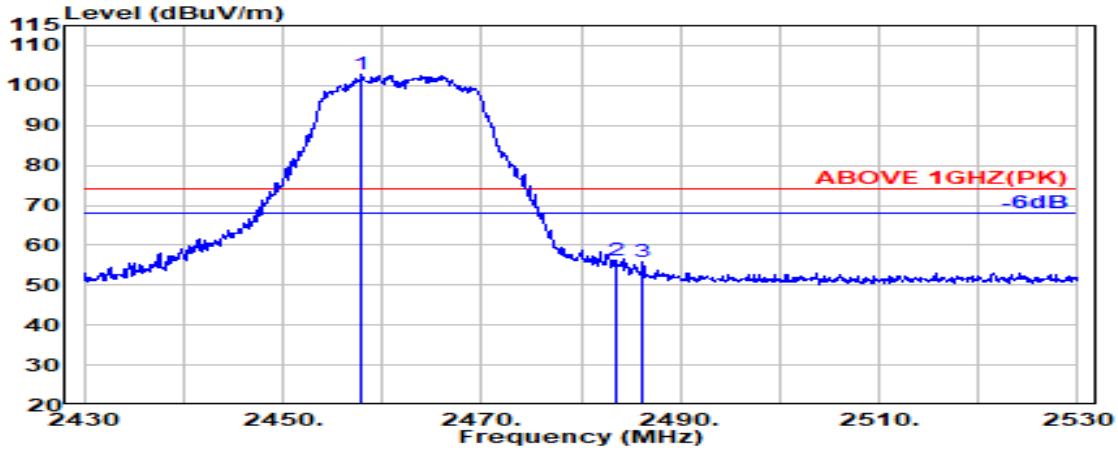

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.900	28.42	6.13	34.52	102.66	102.69	---	---	Peak
2483.500	28.47	6.17	34.53	56.02	56.12	74.00	17.88	Peak
2486.200	28.47	6.17	34.53	55.88	56.00	74.00	18.00	Peak

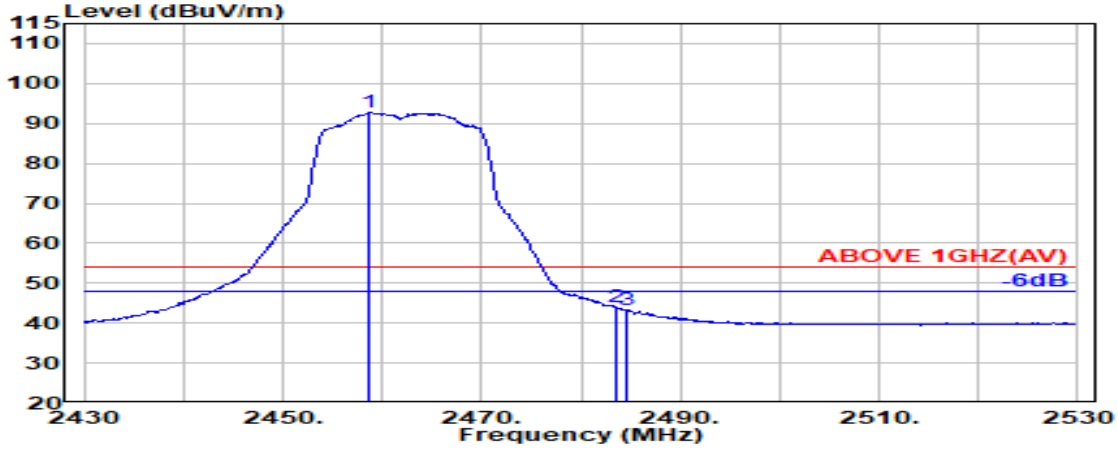


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.600	28.42	6.13	34.52	92.65	92.67	---	---	Average
2483.500	28.47	6.17	34.53	43.79	43.89	54.00	10.11	Average
2484.600	28.47	6.17	34.53	43.23	43.34	54.00	10.66	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

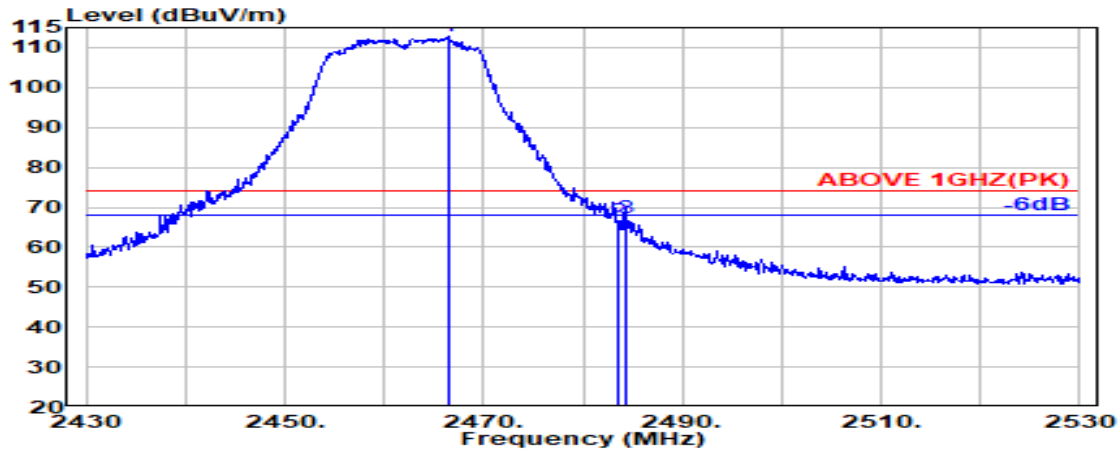

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	28.43	6.14	34.52	112.67	112.73	---	---	Peak
2483.500	28.47	6.17	34.53	66.59	66.70	74.00	7.30	Peak
2484.400	28.47	6.17	34.53	67.09	67.20	74.00	6.80	Peak

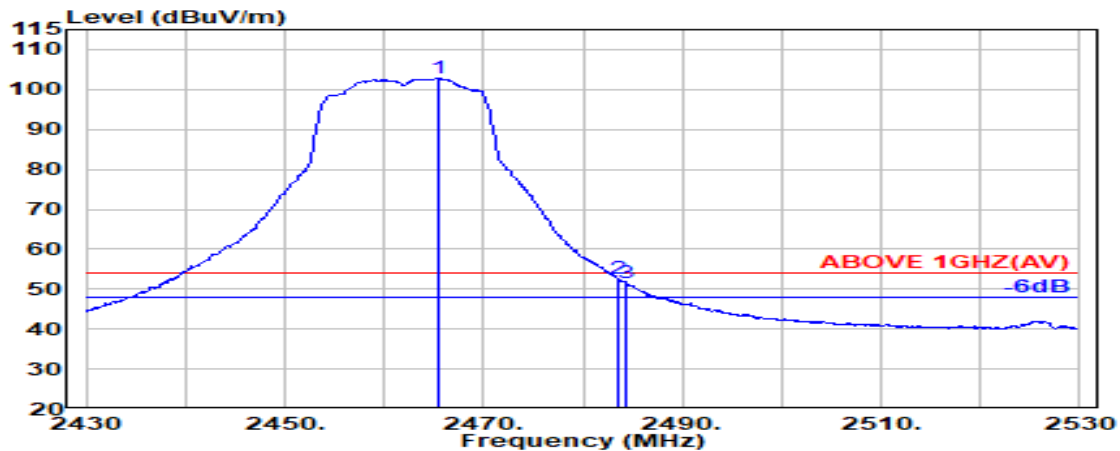


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.43	6.14	34.52	102.90	102.95	---	---	Average
2483.500	28.47	6.17	34.53	52.37	52.48	54.00	1.52	Average
2484.400	28.47	6.17	34.53	51.49	51.60	54.00	2.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

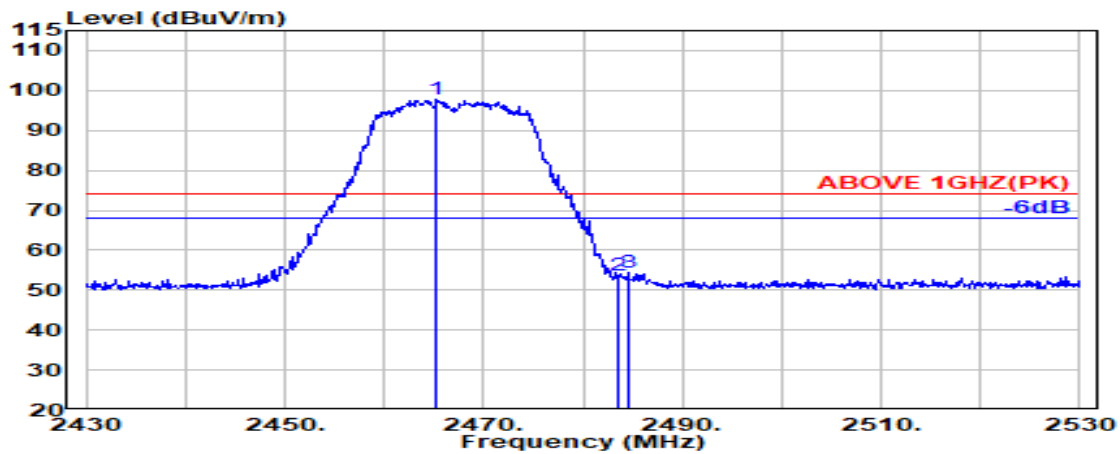

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	28.43	6.14	34.52	97.68	97.73	---	---	Peak
2483.500	28.47	6.17	34.53	53.42	53.53	74.00	20.47	Peak
2484.600	28.47	6.17	34.53	54.24	54.35	74.00	19.65	Peak

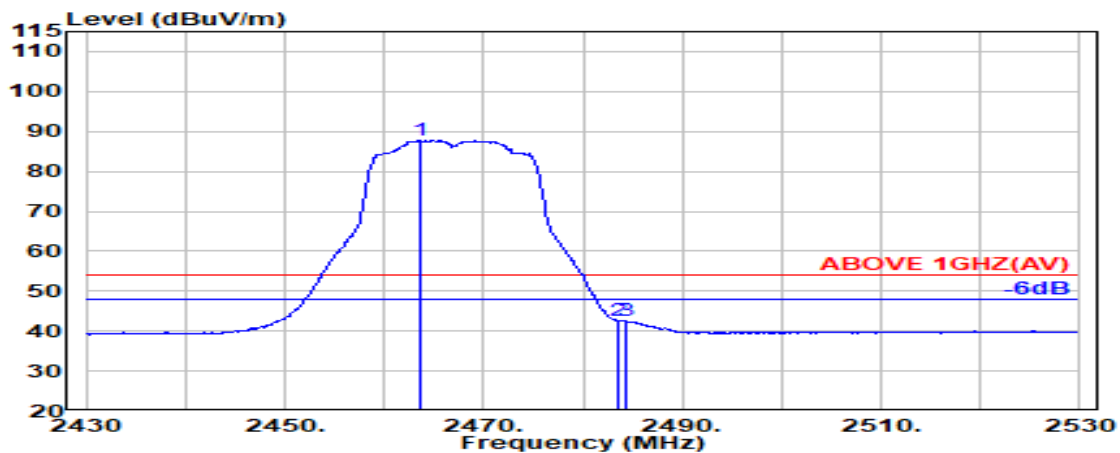


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.600	28.43	6.14	34.52	87.61	87.65	---	---	Average
2483.500	28.47	6.17	34.53	42.54	42.64	54.00	11.36	Average
2484.400	28.47	6.17	34.53	42.43	42.54	54.00	11.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

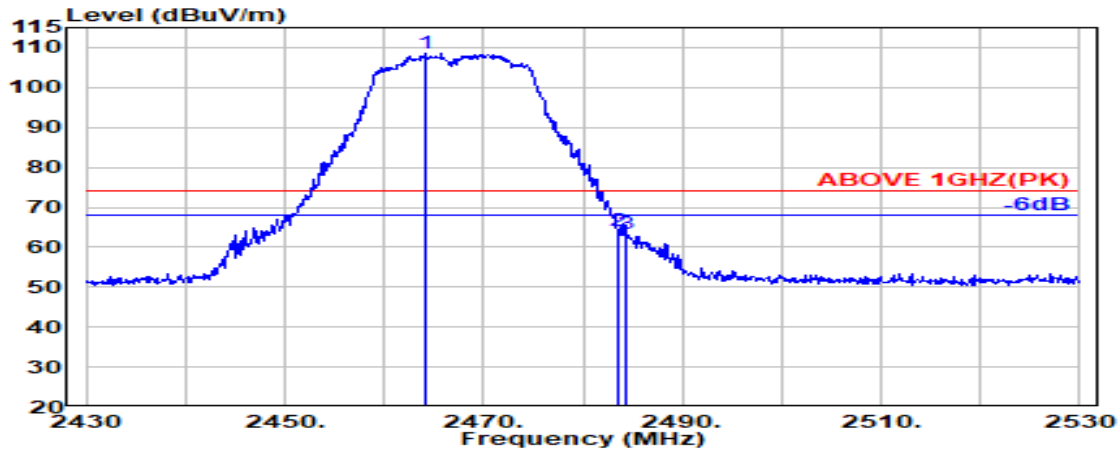

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	6.14	34.52	108.52	108.56	---	---	Peak
2483.500	28.47	6.17	34.53	64.13	64.24	74.00	9.76	Peak
2484.400	28.47	6.17	34.53	63.23	63.34	74.00	10.66	Peak

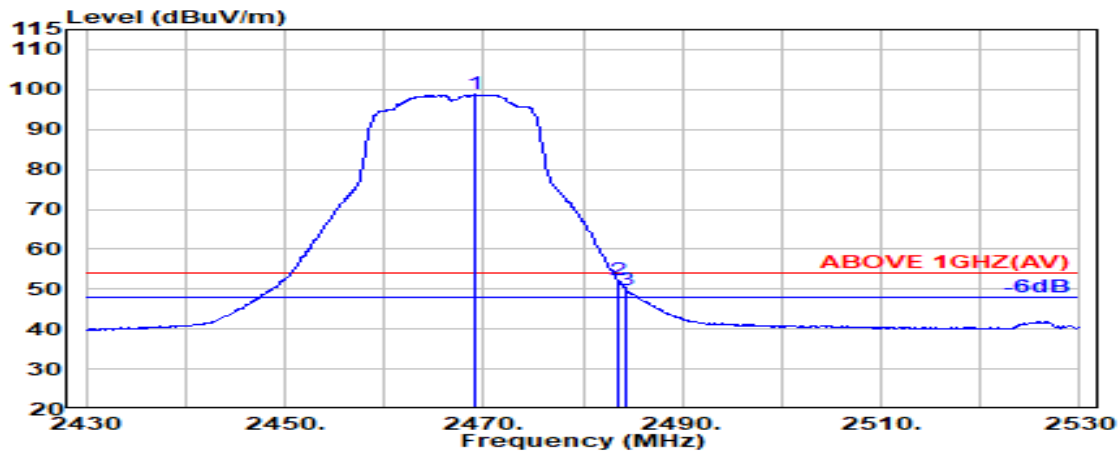


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.100	28.44	6.15	34.52	98.71	98.77	---	---	Average
2483.500	28.47	6.17	34.53	52.33	52.44	54.00	1.56	Average
2484.400	28.47	6.17	34.53	49.63	49.74	54.00	4.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

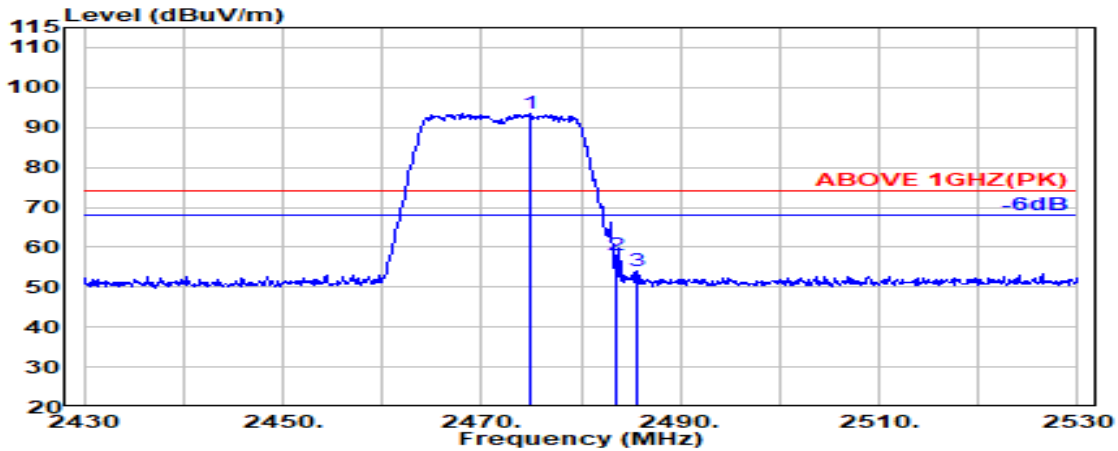

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.800	28.45	6.16	34.53	93.36	93.44	---	---	Peak
2483.500	28.47	6.17	34.53	57.89	57.99	74.00	16.01	Peak
2485.700	28.47	6.17	34.53	53.91	54.02	74.00	19.98	Peak

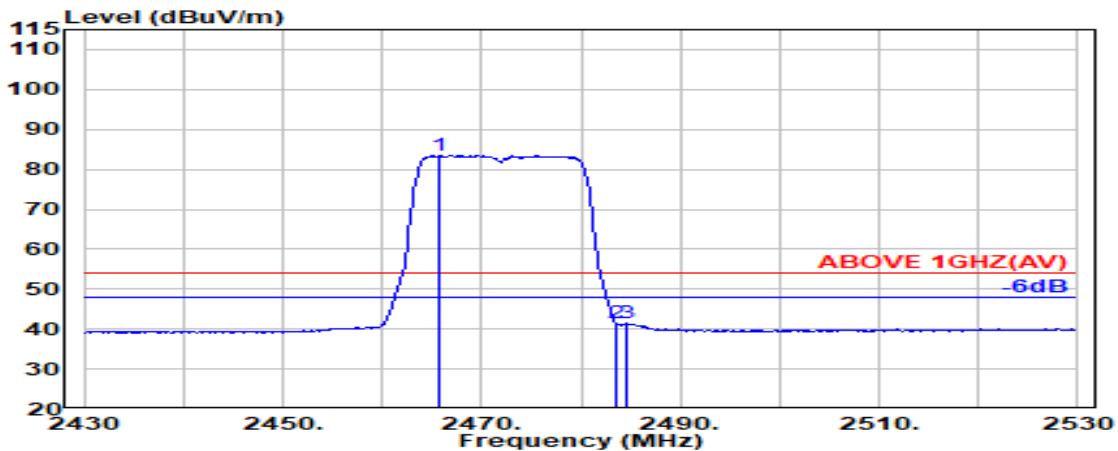


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	28.43	6.14	34.52	83.57	83.62	---	---	Average
2483.500	28.47	6.17	34.53	41.43	41.54	54.00	12.46	Average
2484.500	28.47	6.17	34.53	41.25	41.36	54.00	12.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

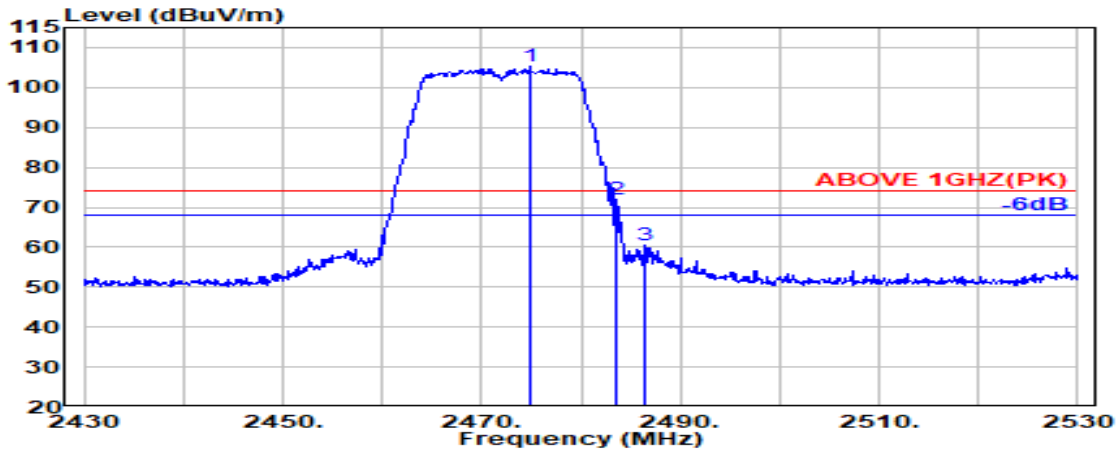

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.900	28.45	6.16	34.53	105.22	105.30	---	---	Peak
2483.500	28.47	6.17	34.53	71.86	71.97	74.00	2.03	Peak
2486.300	28.47	6.17	34.53	60.34	60.46	74.00	13.54	Peak

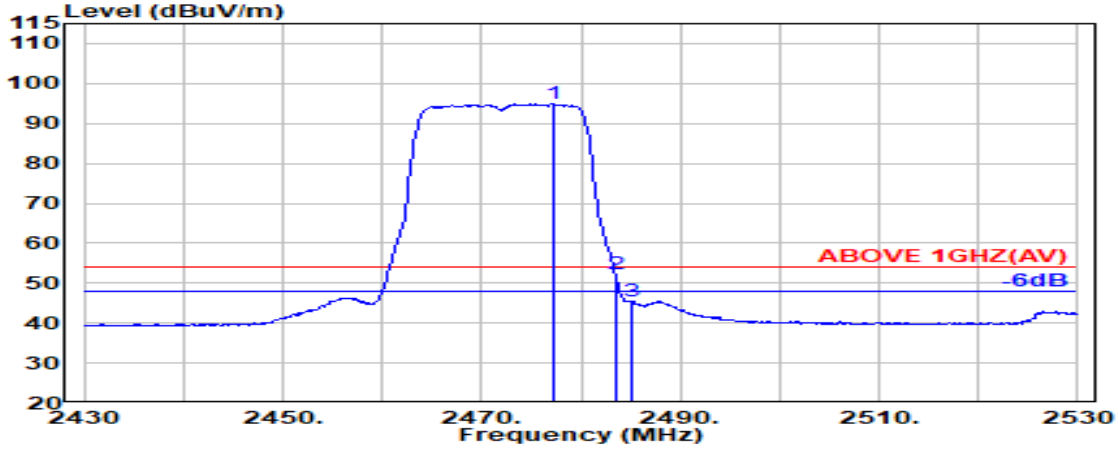


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.300	28.45	6.16	34.53	94.75	94.84	---	---	Average
2483.500	28.47	6.17	34.53	52.11	52.21	54.00	1.79	Average
2485.100	28.47	6.17	34.53	45.49	45.60	54.00	8.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

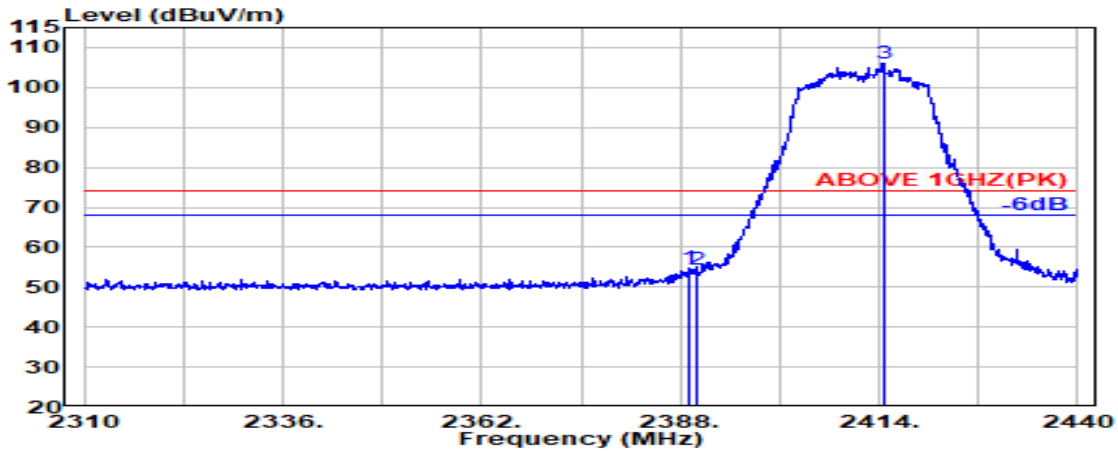

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.51	54.92	54.63	74.00	19.37	Peak
2390.000	28.18	6.03	34.51	54.88	54.58	74.00	19.42	Peak
@ 2414.600	28.19	6.07	34.51	106.24	105.99	---	---	Peak

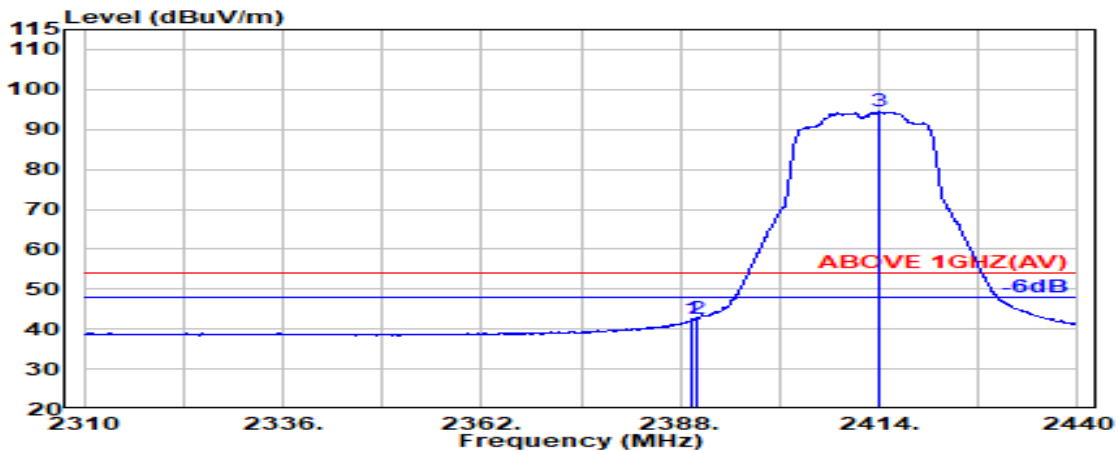


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	42.85	42.56	54.00	11.44	Average
2390.000	28.18	6.03	34.51	42.88	42.59	54.00	11.41	Average
@ 2414.100	28.19	6.07	34.51	94.86	94.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

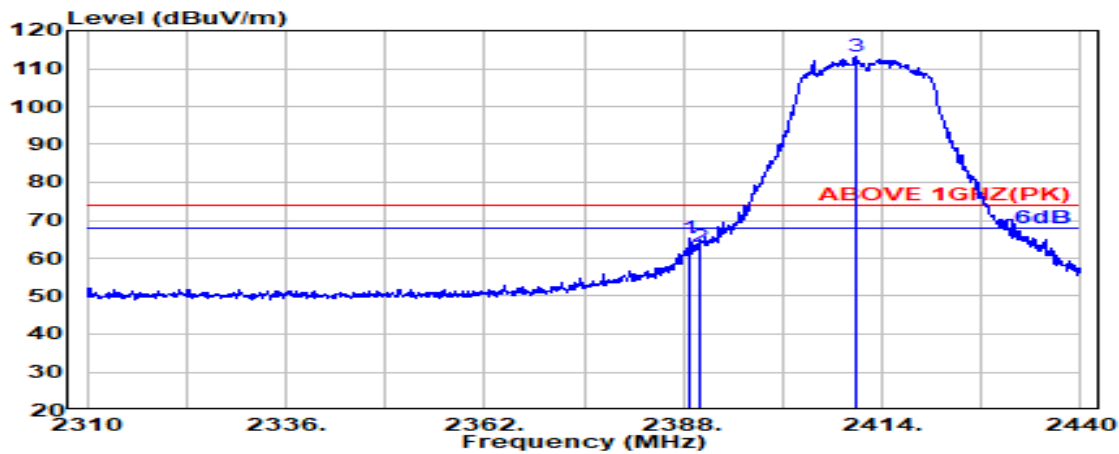

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.51	65.48	65.19	74.00	8.81	Peak
2390.000	28.18	6.03	34.51	63.25	62.96	74.00	11.04	Peak
@ 2410.600	28.16	6.06	34.51	113.67	113.39	---	---	Peak

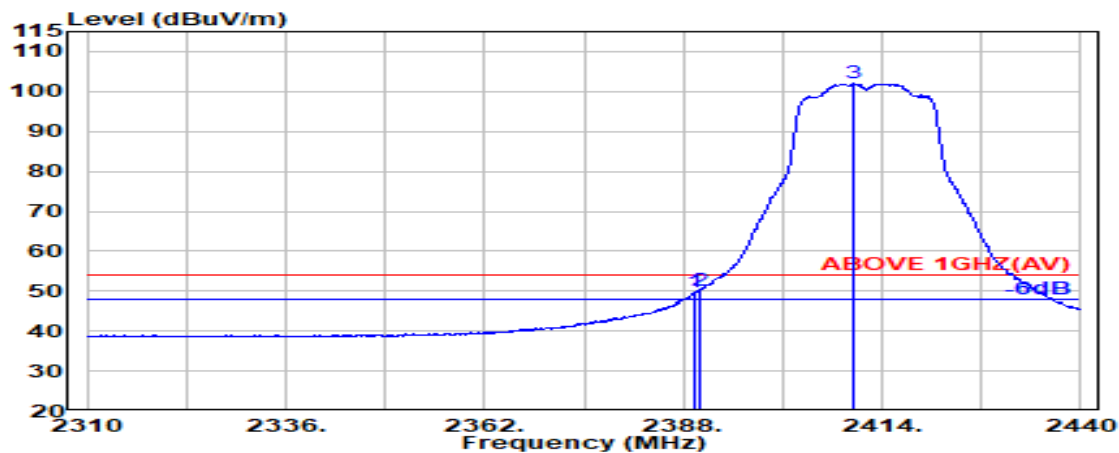


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	50.05	49.76	54.00	4.24	Average
2390.000	28.18	6.03	34.51	50.40	50.10	54.00	3.90	Average
@ 2410.200	28.16	6.06	34.51	102.25	101.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

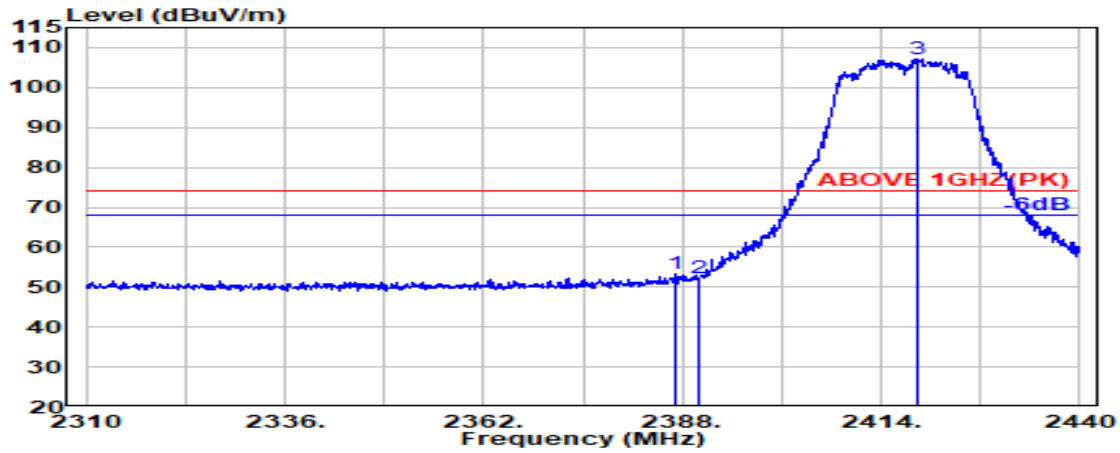

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.000	28.20	6.03	34.51	53.72	53.45	74.00	20.55	Peak
2390.000	28.18	6.03	34.51	52.62	52.33	74.00	21.67	Peak
@ 2418.700	28.21	6.08	34.51	107.38	107.16	---	---	Peak

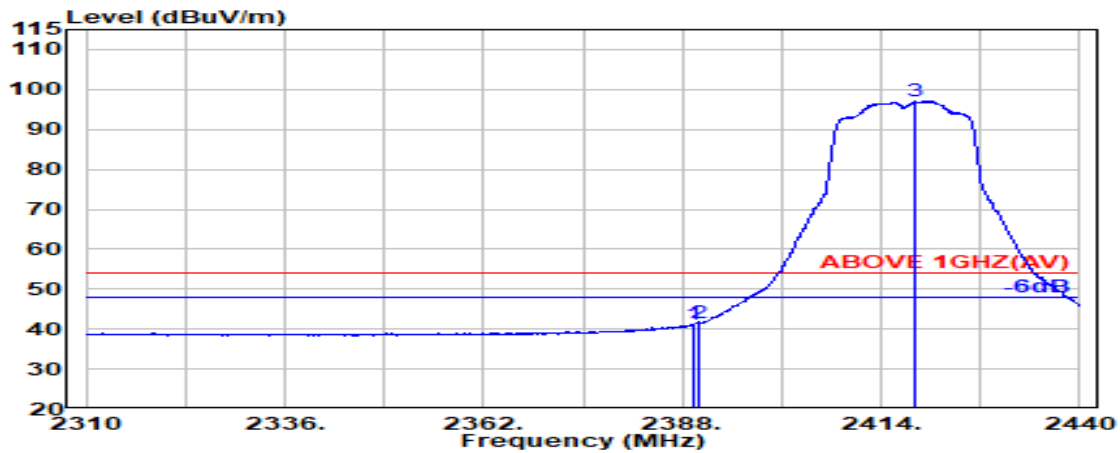


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.51	41.61	41.32	54.00	12.68	Average
2390.000	28.18	6.03	34.51	41.94	41.65	54.00	12.35	Average
@ 2418.400	28.21	6.08	34.51	97.30	97.07	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

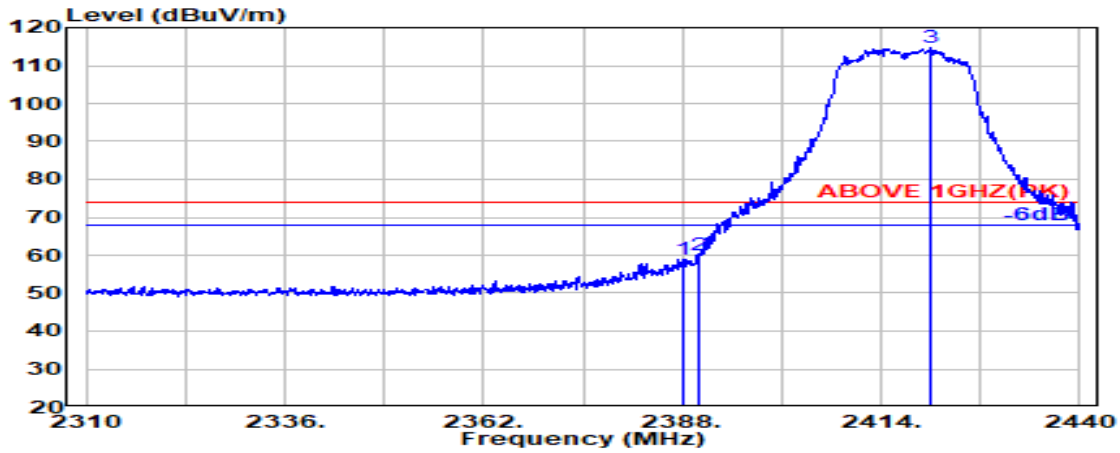

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	28.19	6.03	34.51	59.14	58.86	74.00	15.14	Peak
2390.000	28.18	6.03	34.51	60.31	60.01	74.00	13.99	Peak
@ 2420.600	28.22	6.08	34.51	114.87	114.66	---	---	Peak

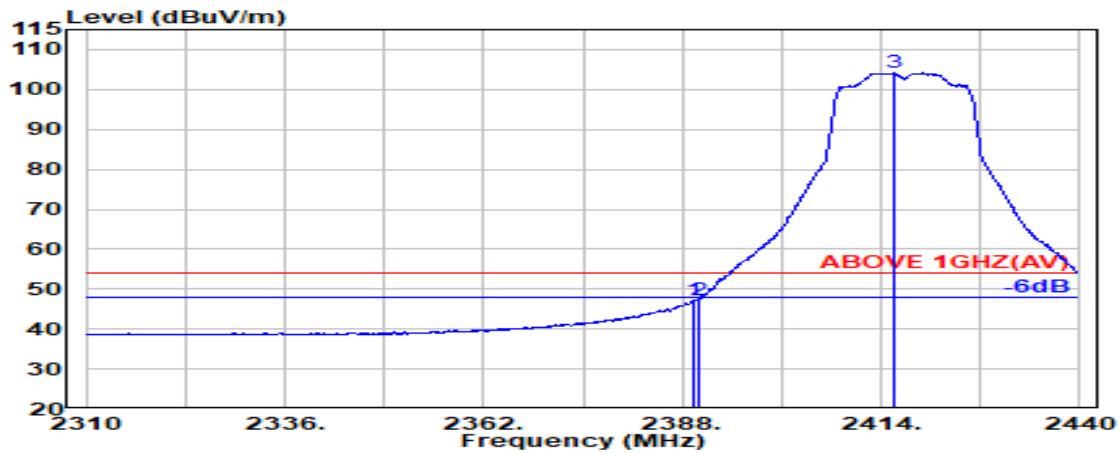


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	47.62	47.32	54.00	6.68	Average
2390.000	28.18	6.03	34.51	47.50	47.20	54.00	6.80	Average
@ 2415.600	28.19	6.07	34.51	104.38	104.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

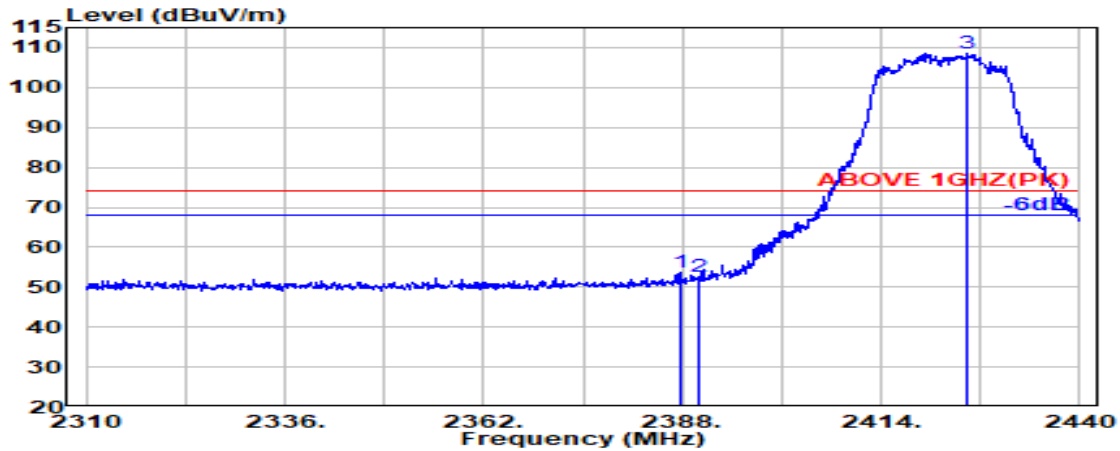

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	28.20	6.03	34.51	53.99	53.72	74.00	20.28	Peak
2390.000	28.18	6.03	34.51	53.09	52.80	74.00	21.20	Peak
@ 2425.300	28.25	6.09	34.52	108.65	108.47	---	---	Peak

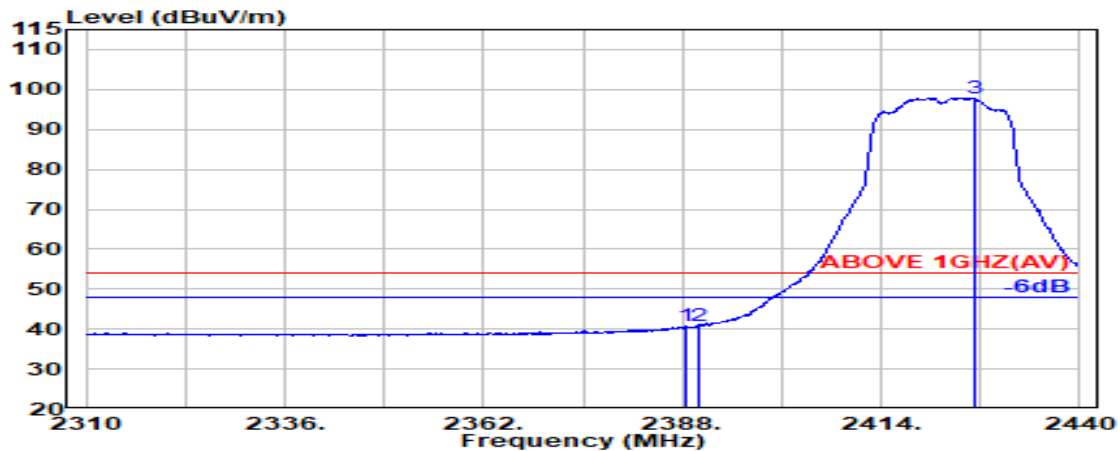


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.19	6.03	34.51	41.03	40.75	54.00	13.25	Average
2390.000	28.18	6.03	34.51	41.07	40.77	54.00	13.23	Average
@ 2426.100	28.26	6.09	34.52	98.11	97.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

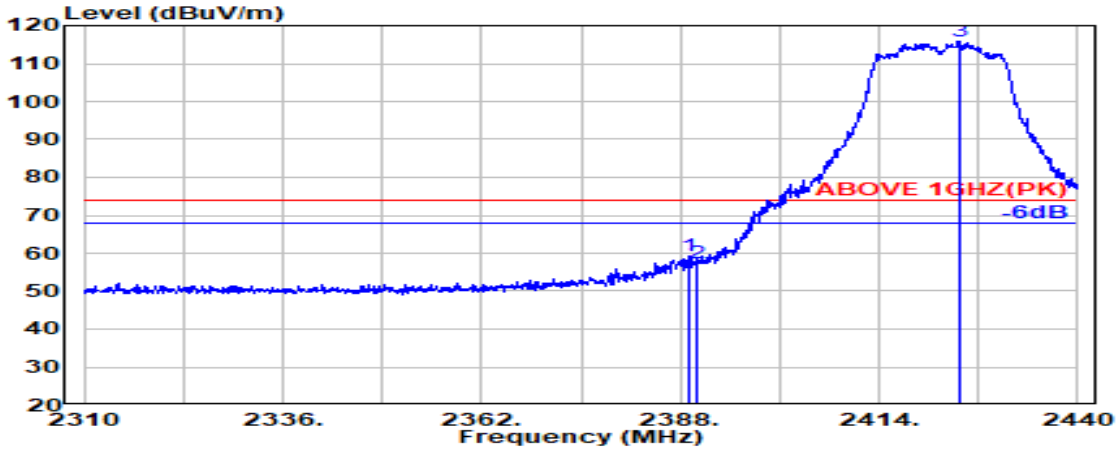

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.51	59.53	59.25	74.00	14.75	Peak
2390.000	28.18	6.03	34.51	57.64	57.34	74.00	16.66	Peak
@ 2424.500	28.25	6.08	34.51	116.02	115.84	---	---	Peak

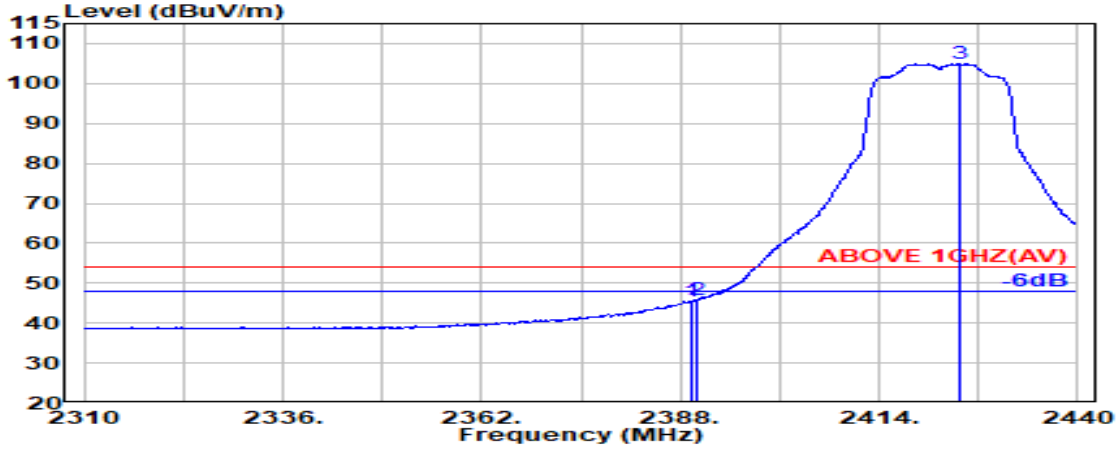


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	45.85	45.56	54.00	8.44	Average
2390.000	28.18	6.03	34.51	46.10	45.80	54.00	8.20	Average
@ 2424.700	28.25	6.08	34.51	105.10	104.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

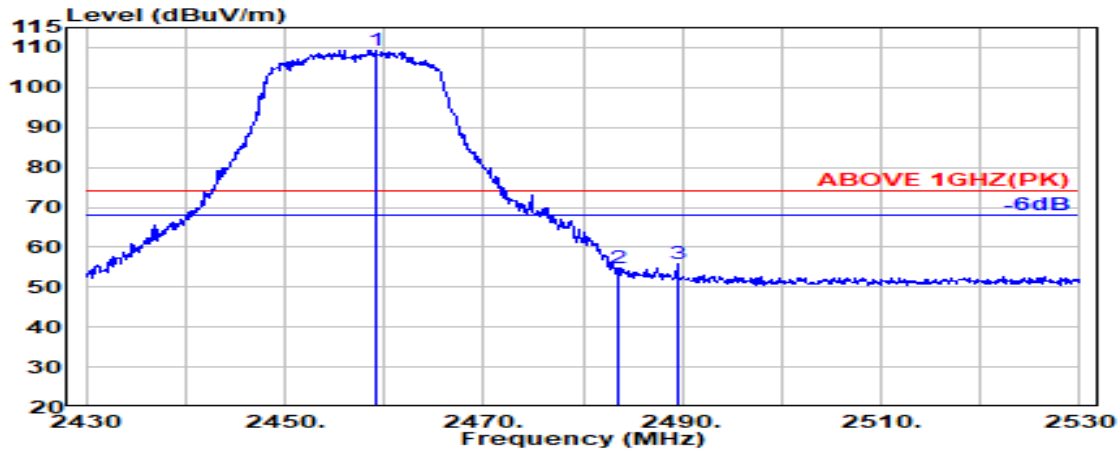

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	28.42	6.13	34.52	109.38	109.41	---	---	Peak
2483.500	28.47	6.17	34.53	54.60	54.71	74.00	19.29	Peak
2489.500	28.48	6.18	34.53	55.72	55.84	74.00	18.16	Peak

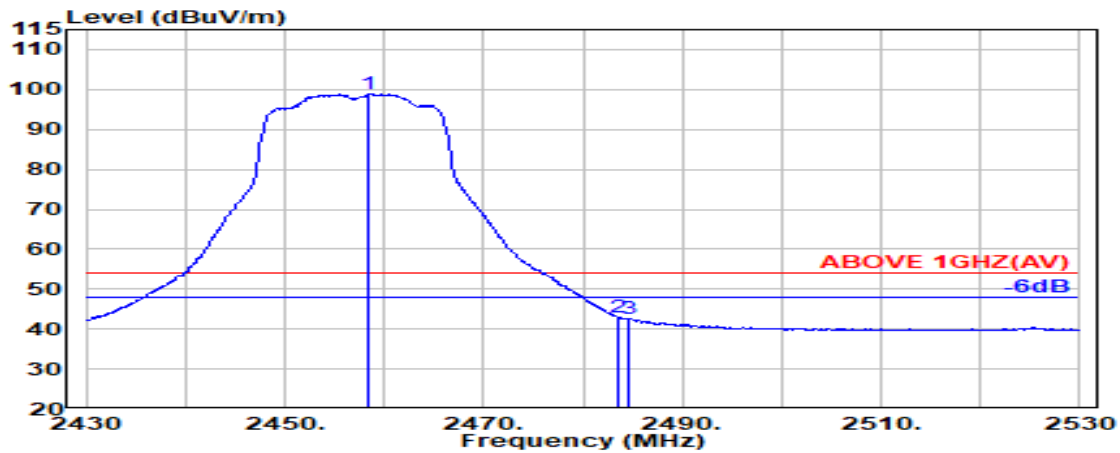


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	28.42	6.13	34.52	98.88	98.91	---	---	Average
2483.500	28.47	6.17	34.53	42.93	43.04	54.00	10.96	Average
2484.500	28.47	6.17	34.53	42.60	42.71	54.00	11.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

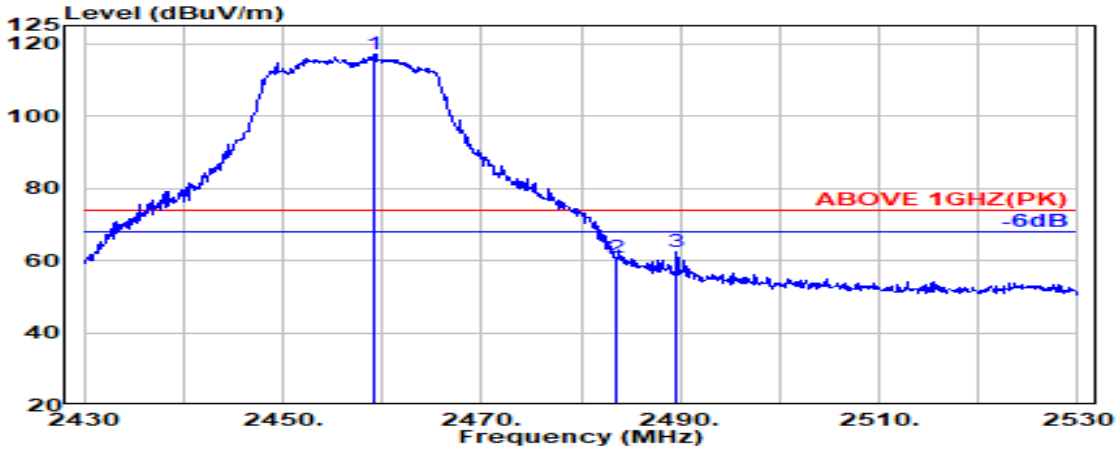

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	28.42	6.13	34.52	117.21	117.24	---	---	Peak
2483.500	28.47	6.17	34.53	60.55	60.66	74.00	13.34	Peak
2489.600	28.48	6.18	34.53	62.22	62.35	74.00	11.65	Peak

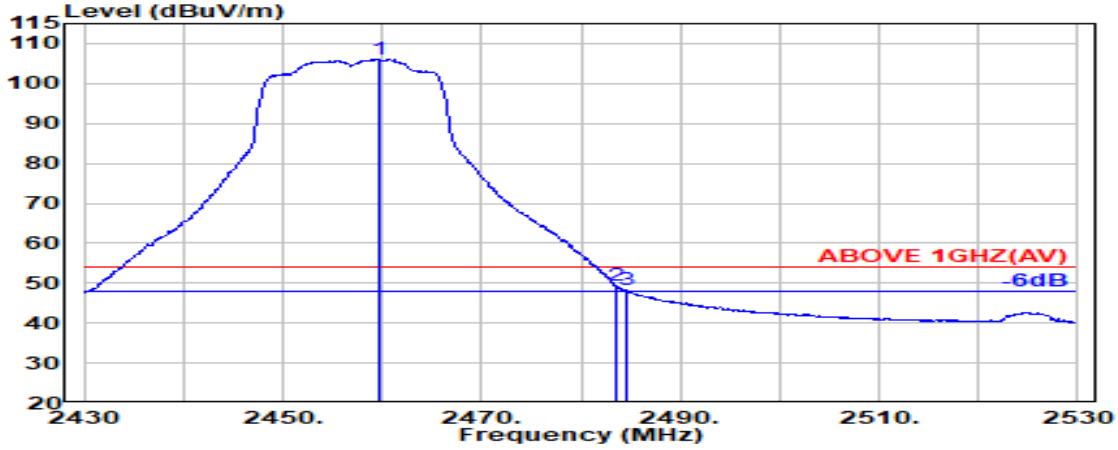


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.600	28.42	6.13	34.52	106.05	106.08	---	---	Average
2483.500	28.47	6.17	34.53	49.31	49.42	54.00	4.58	Average
2484.500	28.47	6.17	34.53	48.06	48.17	54.00	5.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

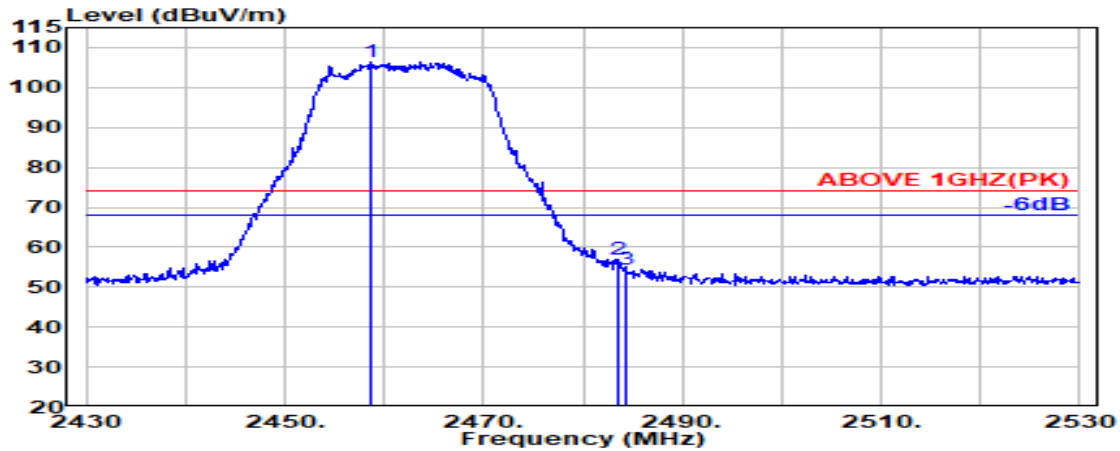

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.700	28.42	6.13	34.52	106.35	106.38	---	---	Peak
2483.500	28.47	6.17	34.53	56.74	56.85	74.00	17.15	Peak
2484.400	28.47	6.17	34.53	54.40	54.51	74.00	19.49	Peak

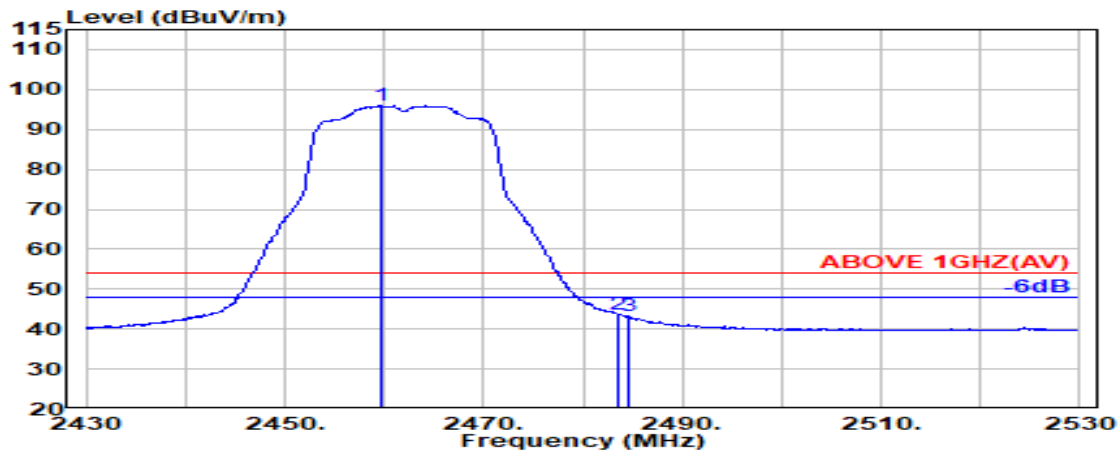


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.600	28.42	6.13	34.52	95.86	95.89	---	---	Average
2483.500	28.47	6.17	34.53	43.68	43.78	54.00	10.22	Average
2484.500	28.47	6.17	34.53	43.02	43.13	54.00	10.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

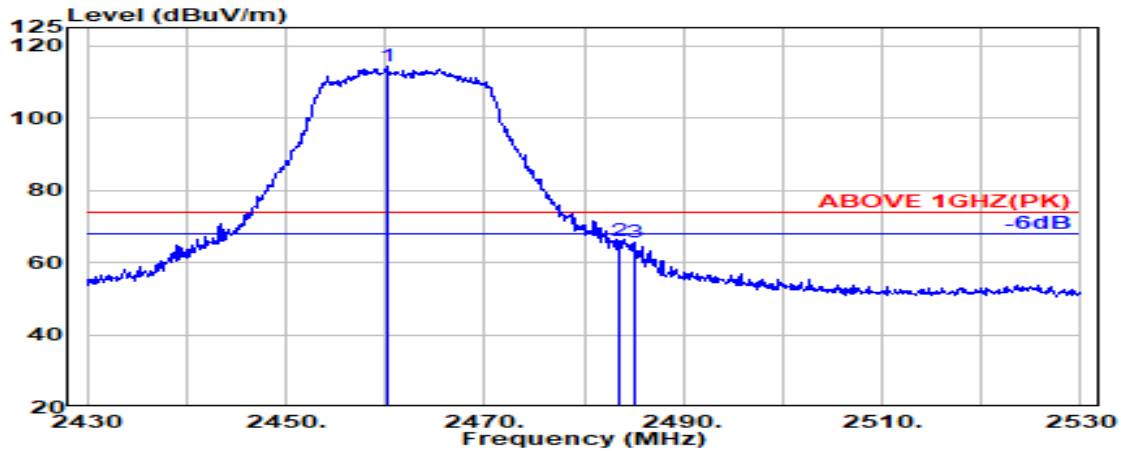

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.300	28.42	6.13	34.52	114.14	114.17	---	---	Peak
2483.500	28.47	6.17	34.53	65.92	66.03	74.00	7.97	Peak
2485.000	28.47	6.17	34.53	65.61	65.72	74.00	8.28	Peak

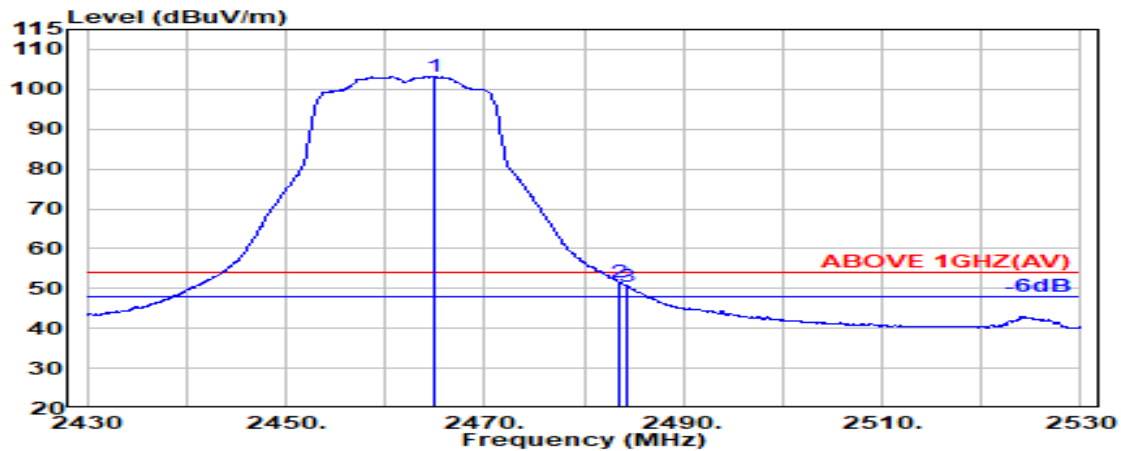


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.43	6.14	34.52	103.21	103.25	---	---	Average
2483.500	28.47	6.17	34.53	51.48	51.59	54.00	2.41	Average
2484.400	28.47	6.17	34.53	50.36	50.47	54.00	3.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

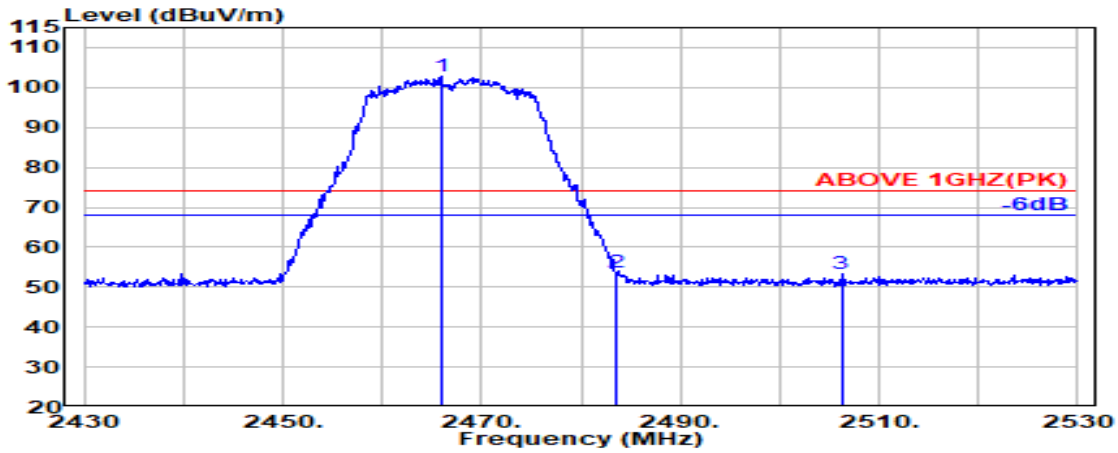

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.900	28.43	6.14	34.52	102.72	102.77	---	---	Peak
2483.500	28.47	6.17	34.53	53.62	53.73	74.00	20.27	Peak
2506.200	28.54	6.20	34.53	53.09	53.30	74.00	20.70	Peak

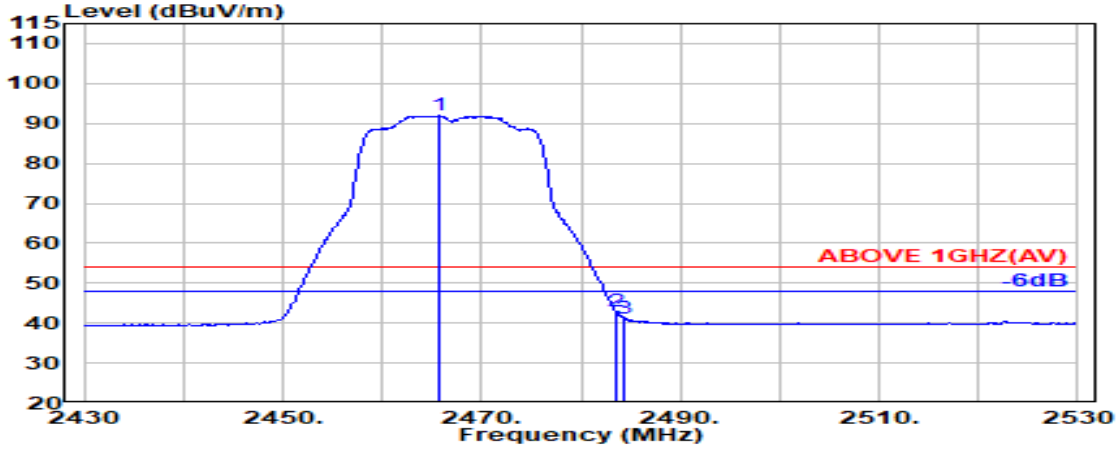


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.43	6.14	34.52	91.89	91.94	---	---	Average
2483.500	28.47	6.17	34.53	42.86	42.97	54.00	11.03	Average
2484.400	28.47	6.17	34.53	40.99	41.10	54.00	12.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

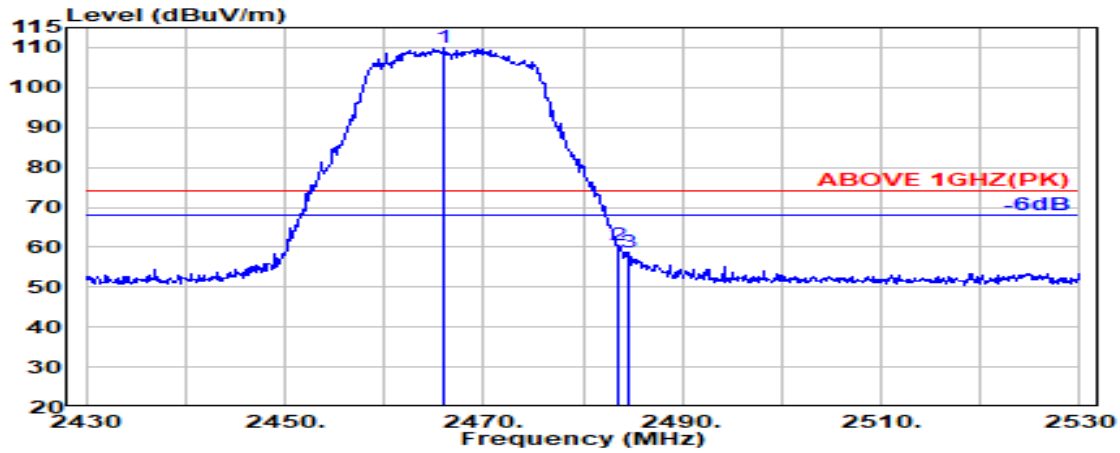

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	28.43	6.14	34.52	109.76	109.81	---	---	Peak
2483.500	28.47	6.17	34.53	60.32	60.43	74.00	13.57	Peak
2484.700	28.47	6.17	34.53	58.73	58.85	74.00	15.15	Peak

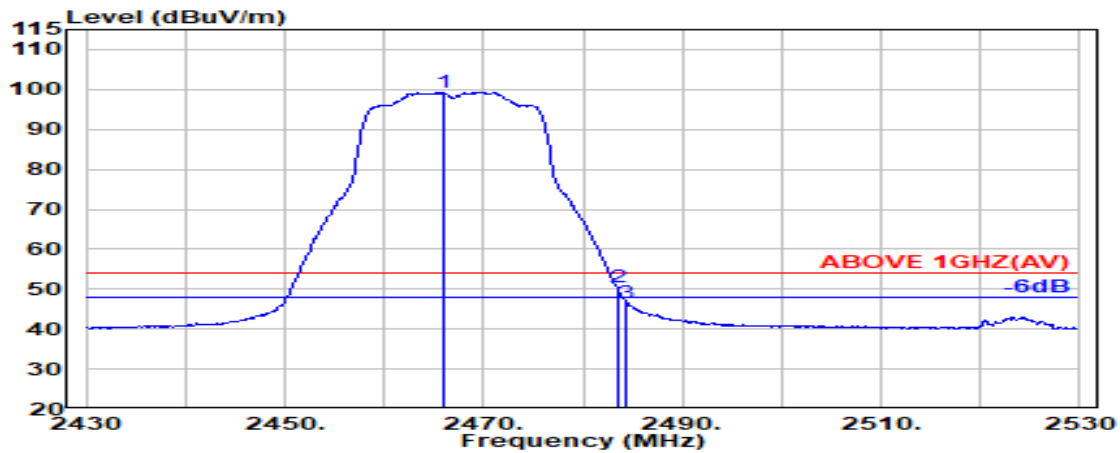


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.900	28.43	6.14	34.52	99.32	99.38	---	---	Average
2483.500	28.47	6.17	34.53	50.39	50.49	54.00	3.51	Average
2484.400	28.47	6.17	34.53	46.55	46.66	54.00	7.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

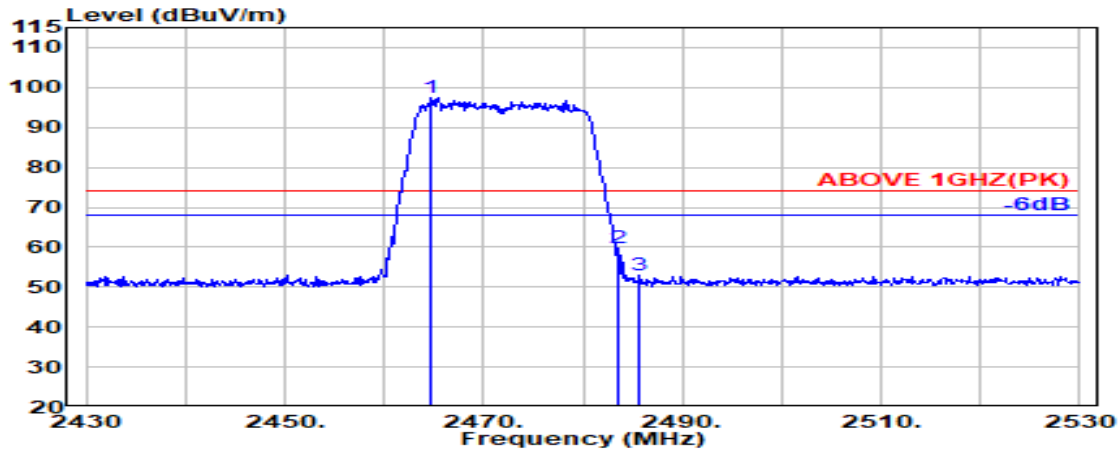

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.43	6.14	34.52	97.34	97.39	---	---	Peak
2483.500	28.47	6.17	34.53	59.77	59.88	74.00	14.12	Peak
2485.700	28.47	6.17	34.53	52.82	52.94	74.00	21.06	Peak




Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.100	28.43	6.14	34.52	86.19	86.25	---	---	Average
2483.500	28.47	6.17	34.53	43.71	43.81	54.00	10.19	Average
2484.600	28.47	6.17	34.53	40.90	41.01	54.00	12.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

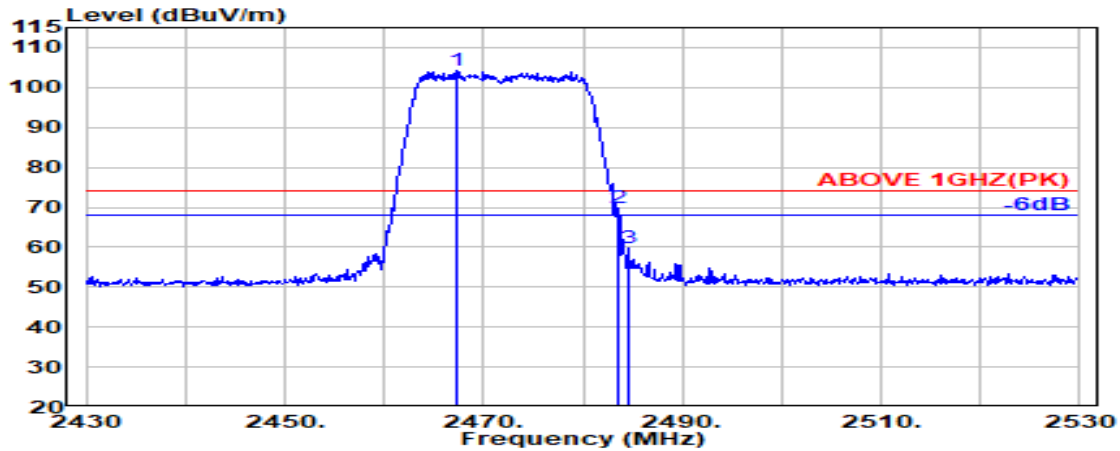

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.400	28.44	6.14	34.52	104.09	104.15	---	---	Peak
2483.500	28.47	6.17	34.53	69.77	69.88	74.00	4.12	Peak
2484.500	28.47	6.17	34.53	59.52	59.64	74.00	14.36	Peak

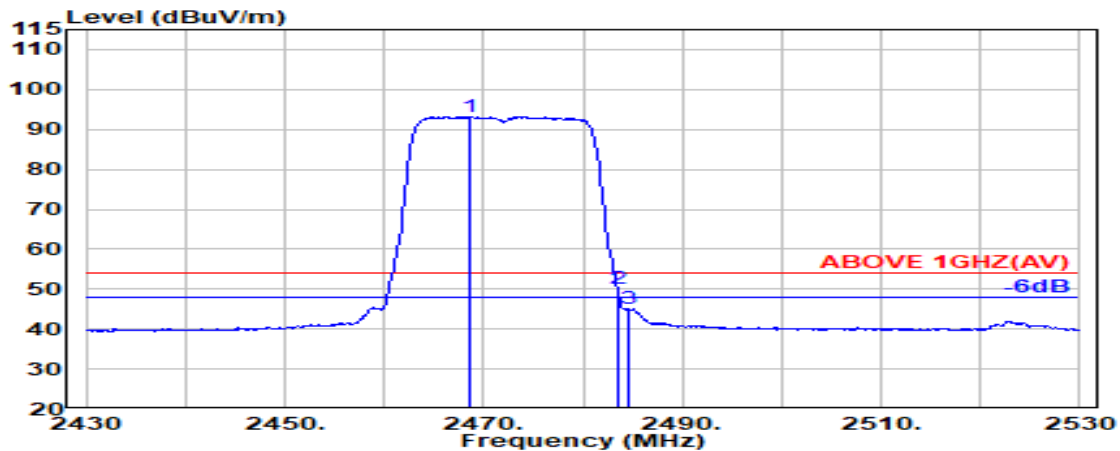


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.700	28.44	6.15	34.52	93.19	93.25	---	---	Average
2483.500	28.47	6.17	34.53	49.96	50.07	54.00	3.93	Average
2484.500	28.47	6.17	34.53	44.96	45.07	54.00	8.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

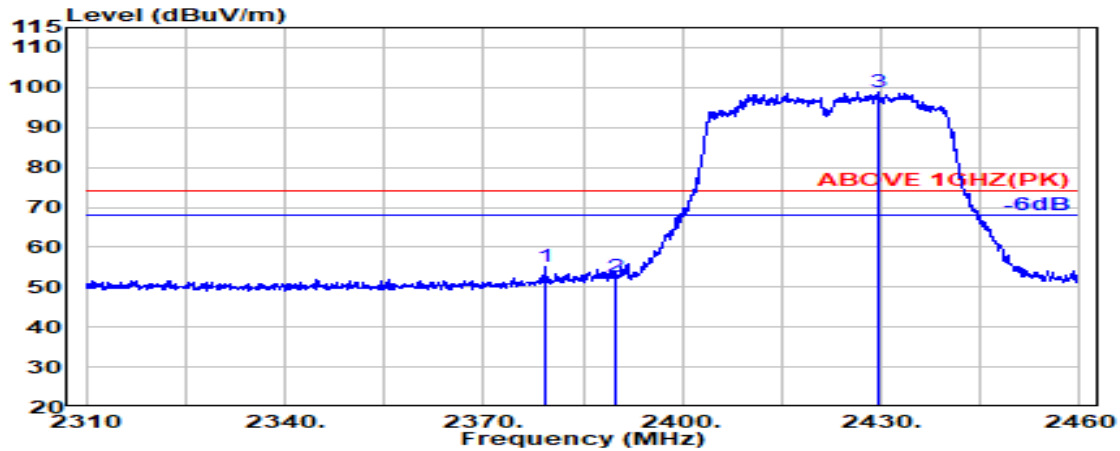

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2379.200	28.27	6.02	34.51	55.25	55.03	74.00	18.97	Peak
2390.000	28.18	6.03	34.51	52.78	52.48	74.00	21.52	Peak
@ 2429.600	28.28	6.09	34.52	98.95	98.81	---	---	Peak

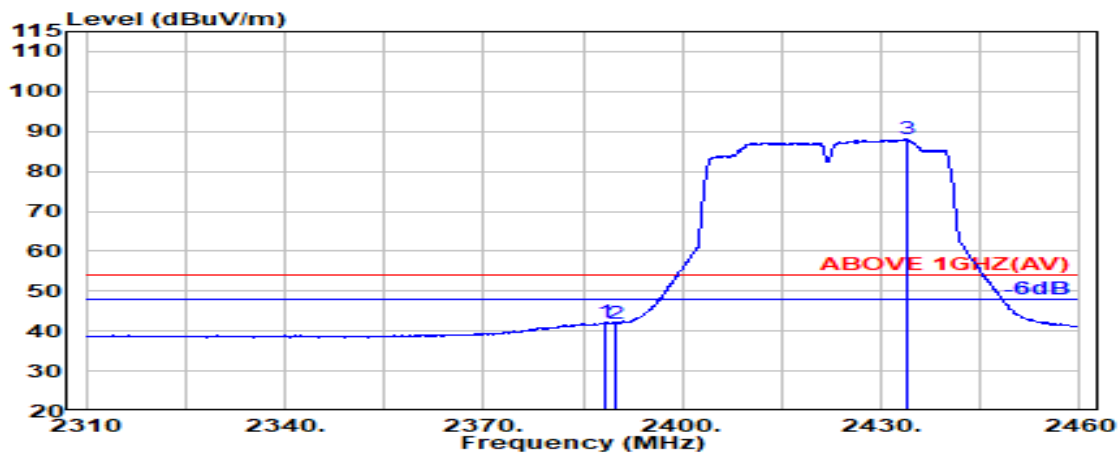


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.19	6.03	34.51	42.49	42.20	54.00	11.80	Average
2390.000	28.18	6.03	34.51	42.30	42.01	54.00	11.99	Average
@ 2433.900	28.30	6.10	34.52	88.25	88.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

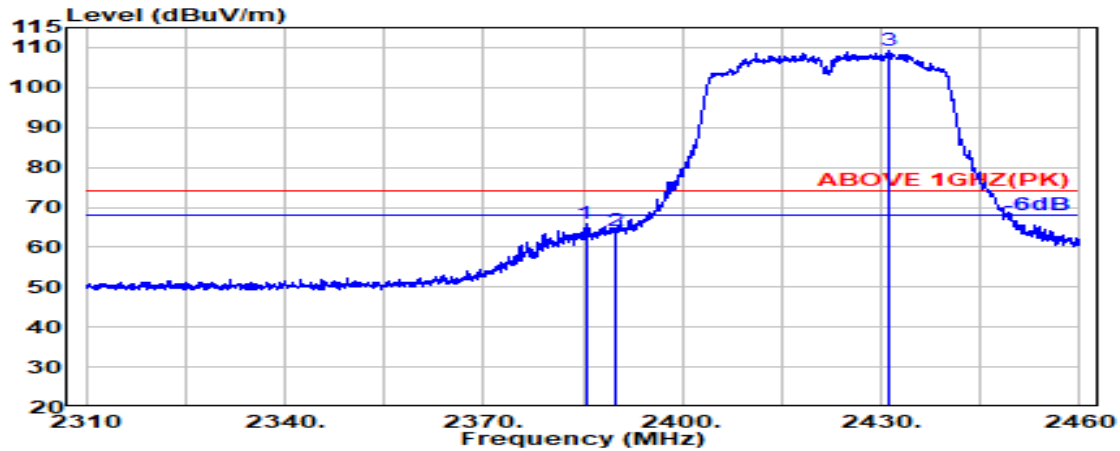

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.400	28.22	6.03	34.51	66.25	65.99	74.00	8.01	Peak
2390.000	28.18	6.03	34.51	64.26	63.97	74.00	10.03	Peak
@ 2431.300	28.29	6.09	34.52	109.32	109.19	---	---	Peak

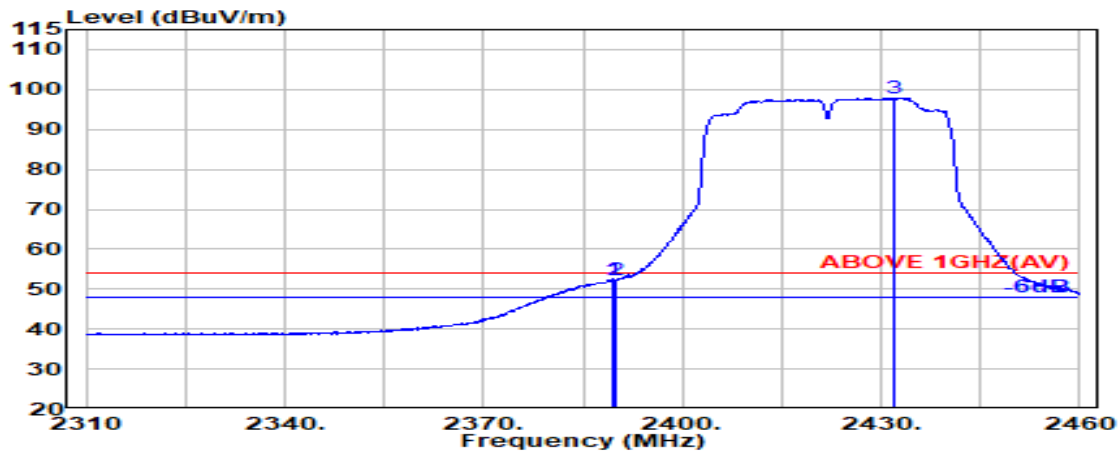


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	52.73	52.44	54.00	1.56	Average
2390.000	28.18	6.03	34.51	52.56	52.26	54.00	1.74	Average
@ 2432.100	28.29	6.09	34.52	98.03	97.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

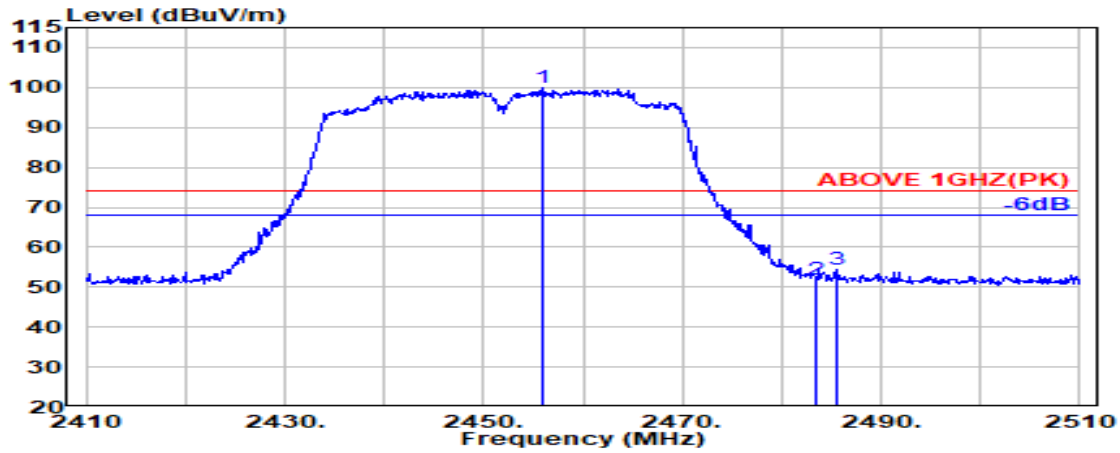

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.900	28.41	6.13	34.52	100.03	100.04	---	---	Peak
2483.500	28.47	6.17	34.53	51.83	51.94	74.00	22.06	Peak
2485.500	28.47	6.17	34.53	54.23	54.34	74.00	19.66	Peak

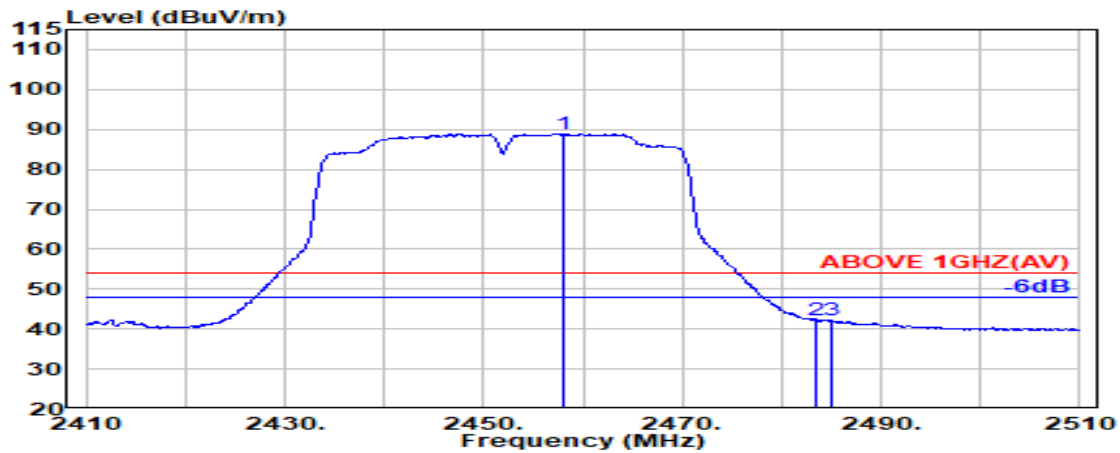


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	28.42	6.13	34.52	88.90	88.93	---	---	Average
2483.500	28.47	6.17	34.53	42.27	42.38	54.00	11.62	Average
2484.900	28.47	6.17	34.53	42.22	42.33	54.00	11.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

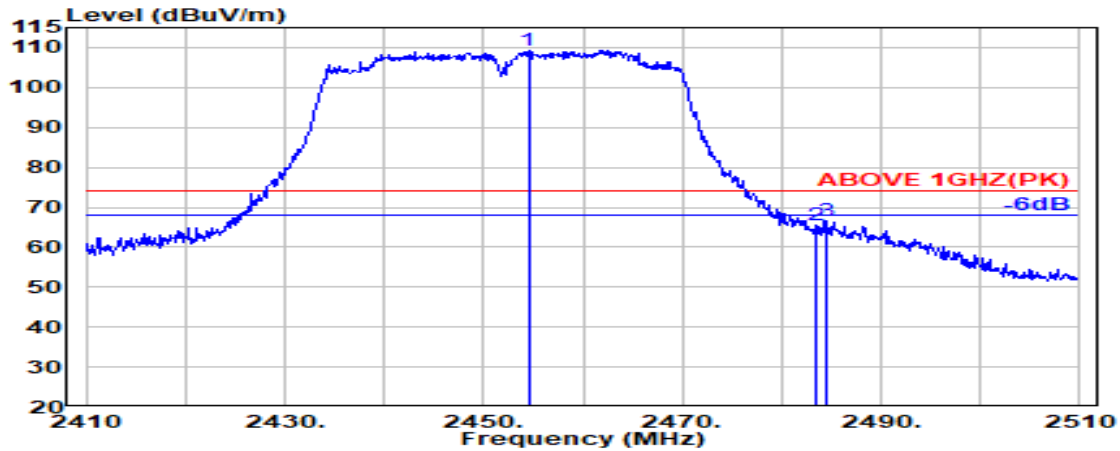

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	28.41	6.13	34.52	109.33	109.35	---	---	Peak
2483.500	28.47	6.17	34.53	65.54	65.65	74.00	8.35	Peak
2484.400	28.47	6.17	34.53	66.64	66.75	74.00	7.25	Peak

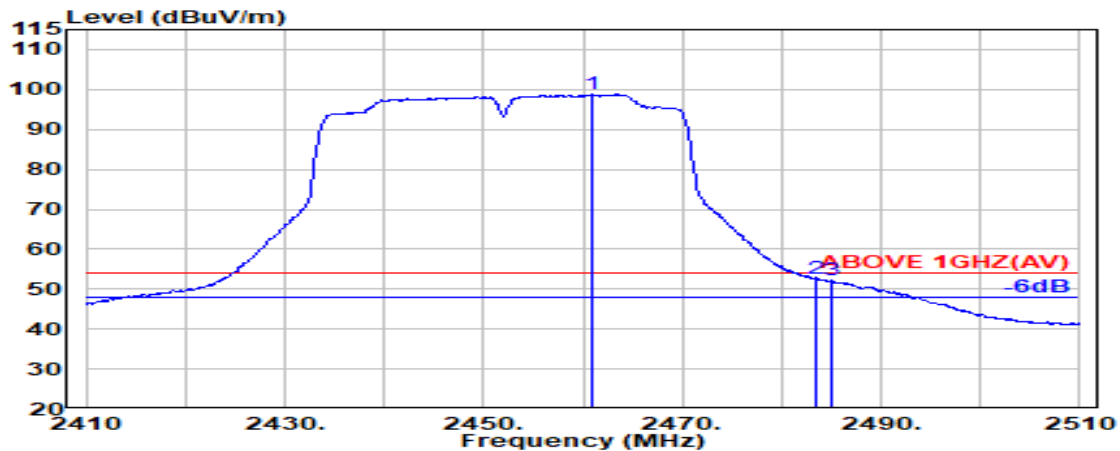


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.900	28.42	6.14	34.52	98.76	98.80	---	---	Average
2483.500	28.47	6.17	34.53	52.35	52.46	54.00	1.54	Average
2484.900	28.47	6.17	34.53	52.11	52.22	54.00	1.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

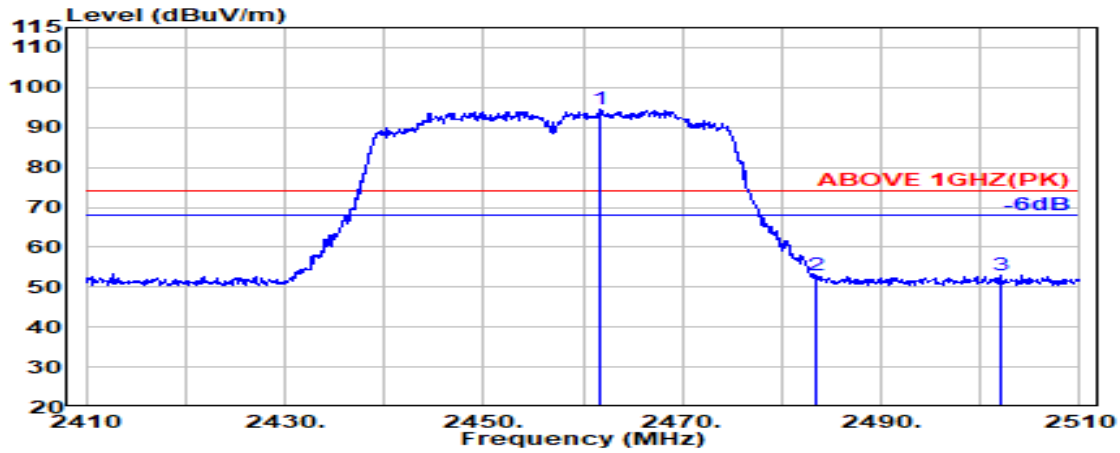

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.600	28.42	6.14	34.52	94.42	94.46	---	---	Peak
2483.500	28.47	6.17	34.53	52.90	53.01	74.00	20.99	Peak
2502.100	28.51	6.19	34.53	52.86	53.04	74.00	20.96	Peak




Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.44	6.15	34.52	83.50	83.56	---	---	Average
2483.500	28.47	6.17	34.53	41.79	41.89	54.00	12.11	Average
2484.600	28.47	6.17	34.53	40.66	40.78	54.00	13.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

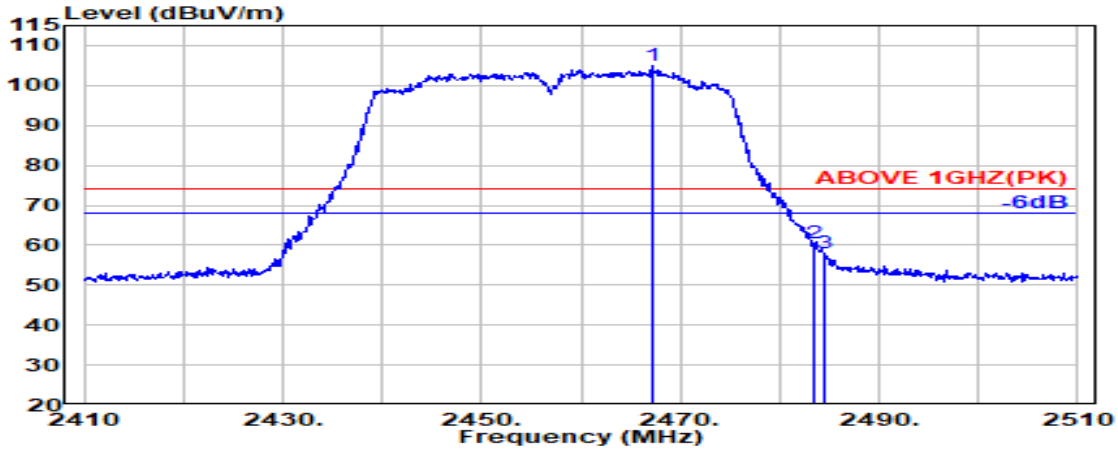

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.200	28.43	6.14	34.52	104.92	104.97	---	---	Peak
2483.500	28.47	6.17	34.53	60.25	60.36	74.00	13.64	Peak
2484.500	28.47	6.17	34.53	57.93	58.04	74.00	15.96	Peak

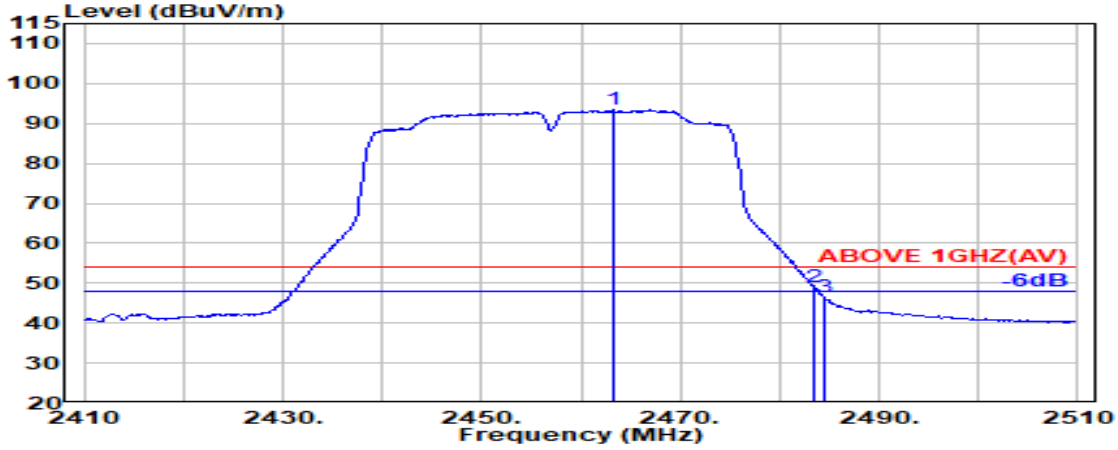


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	28.43	6.14	34.52	93.37	93.41	---	---	Average
2483.500	28.47	6.17	34.53	48.77	48.88	54.00	5.12	Average
2484.400	28.47	6.17	34.53	46.46	46.57	54.00	7.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

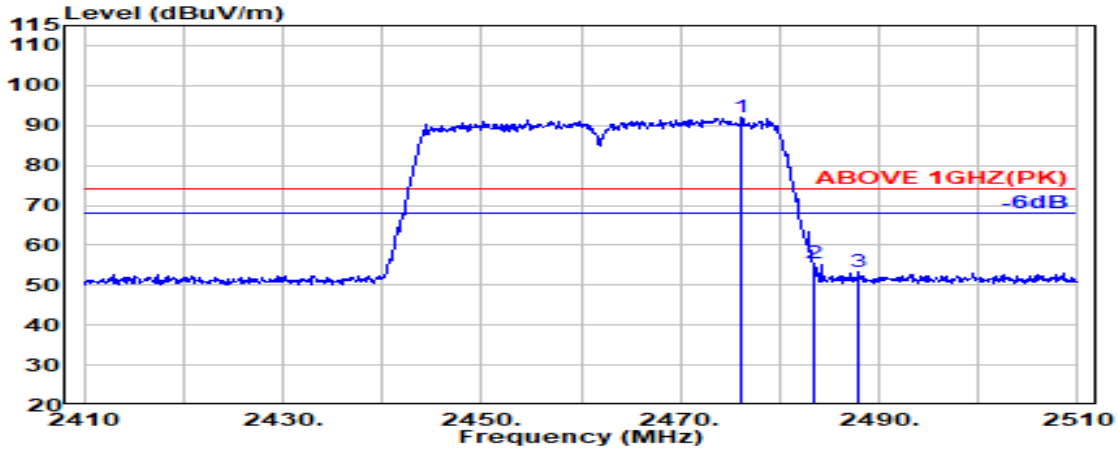

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.200	28.45	6.16	34.53	92.06	92.15	---	---	Peak
2483.500	28.47	6.17	34.53	55.26	55.37	74.00	18.63	Peak
2488.000	28.48	6.17	34.53	53.17	53.30	74.00	20.70	Peak

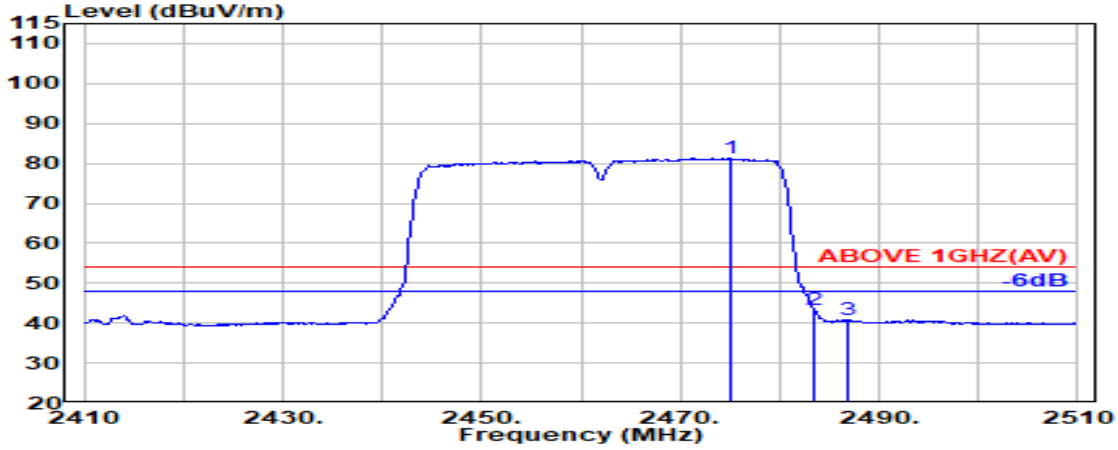


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.000	28.45	6.16	34.53	81.18	81.27	---	---	Average
2483.500	28.47	6.17	34.53	43.23	43.34	54.00	10.66	Average
2486.900	28.47	6.17	34.53	40.79	40.91	54.00	13.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

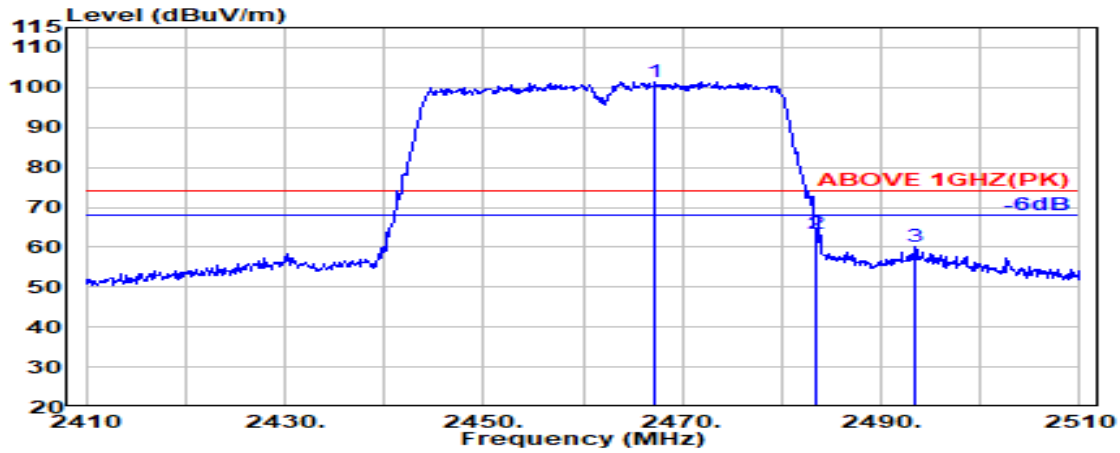

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.300	28.43	6.14	34.52	101.45	101.50	---	---	Peak
2483.500	28.47	6.17	34.53	63.10	63.21	74.00	10.79	Peak
2493.500	28.49	6.18	34.53	60.17	60.31	74.00	13.69	Peak

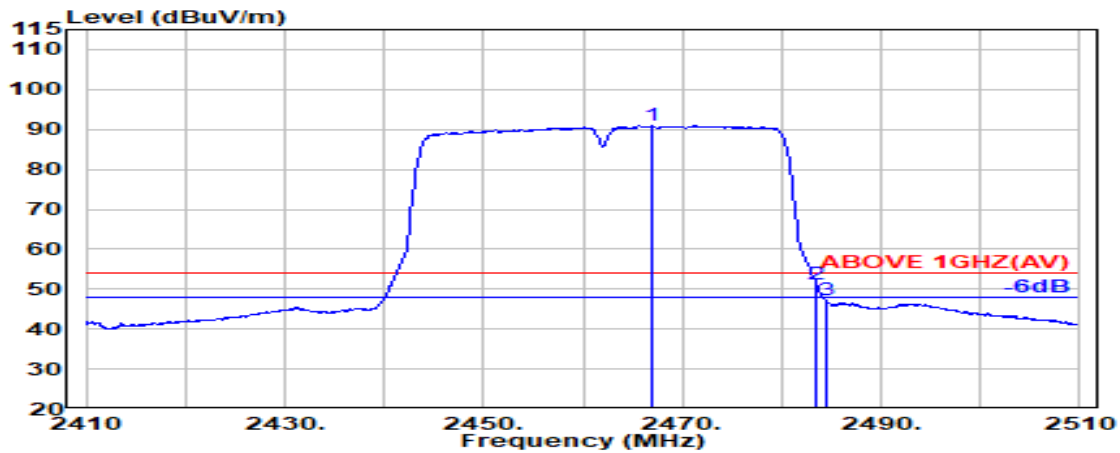


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.900	28.43	6.14	34.52	90.84	90.90	---	---	Average
2483.500	28.47	6.17	34.53	51.21	51.31	54.00	2.69	Average
2484.400	28.47	6.17	34.53	47.05	47.16	54.00	6.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

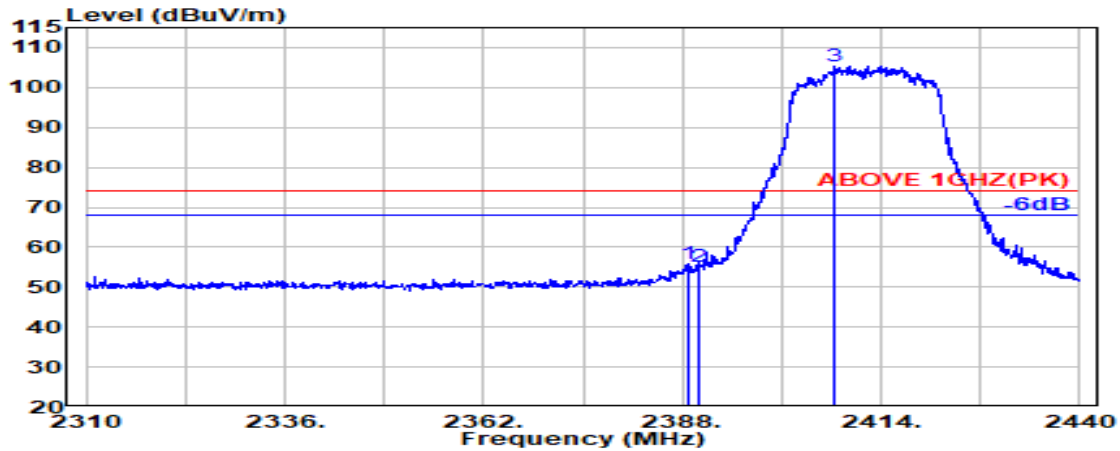

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.51	55.99	55.70	74.00	18.30	Peak
2390.000	28.18	6.03	34.51	55.39	55.10	74.00	18.90	Peak
@ 2407.900	28.15	6.06	34.51	105.73	105.43	---	---	Peak

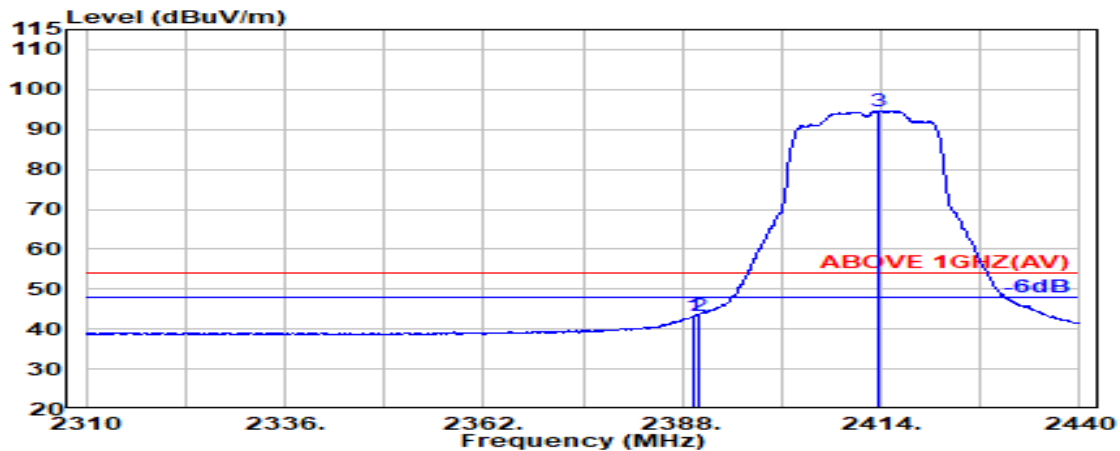


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	43.76	43.47	54.00	10.53	Average
2390.000	28.18	6.03	34.51	43.75	43.46	54.00	10.54	Average
@ 2413.500	28.18	6.07	34.51	94.95	94.68	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

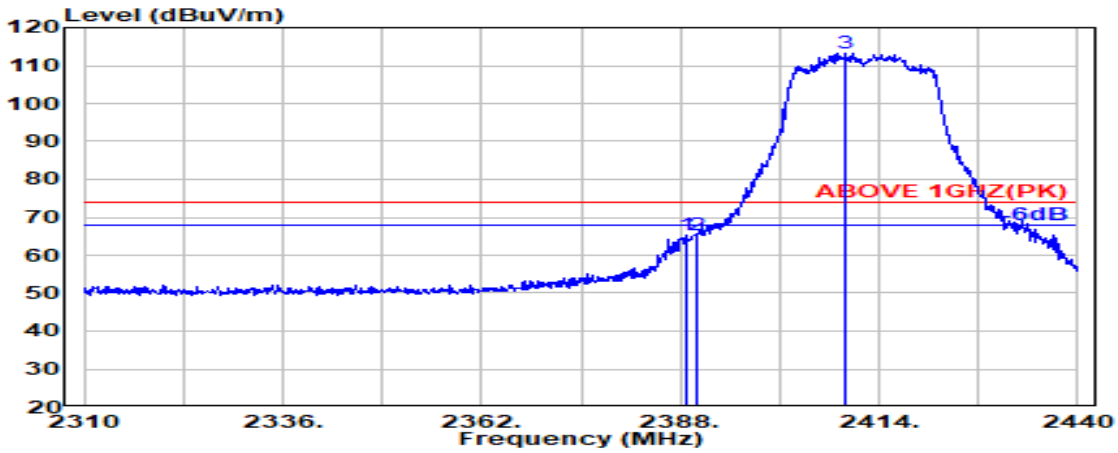

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.51	65.71	65.42	74.00	8.58	Peak
2390.000	28.18	6.03	34.51	65.68	65.38	74.00	8.62	Peak
@ 2409.600	28.16	6.06	34.51	113.53	113.24	---	---	Peak

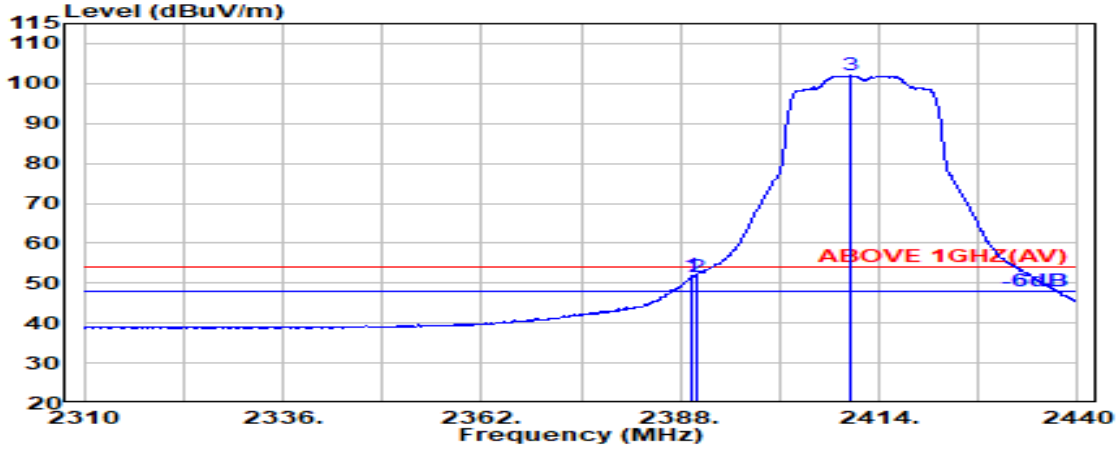


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	52.08	51.79	54.00	2.21	Average
2390.000	28.18	6.03	34.51	51.89	51.60	54.00	2.40	Average
@ 2410.300	28.16	6.06	34.51	102.22	101.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

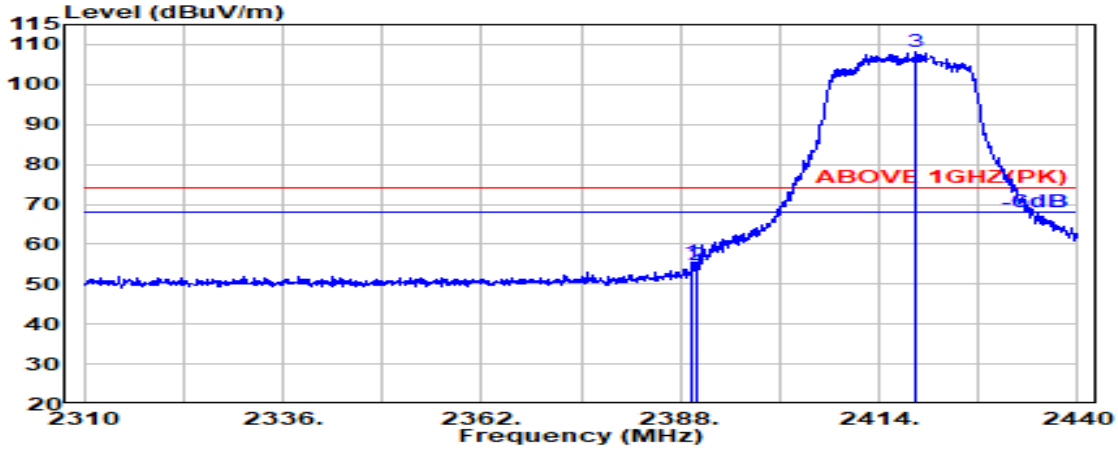

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	55.86	55.57	74.00	18.43	Peak
2390.000	28.18	6.03	34.51	55.10	54.80	74.00	19.20	Peak
@ 2418.700	28.21	6.08	34.51	108.43	108.21	---	---	Peak

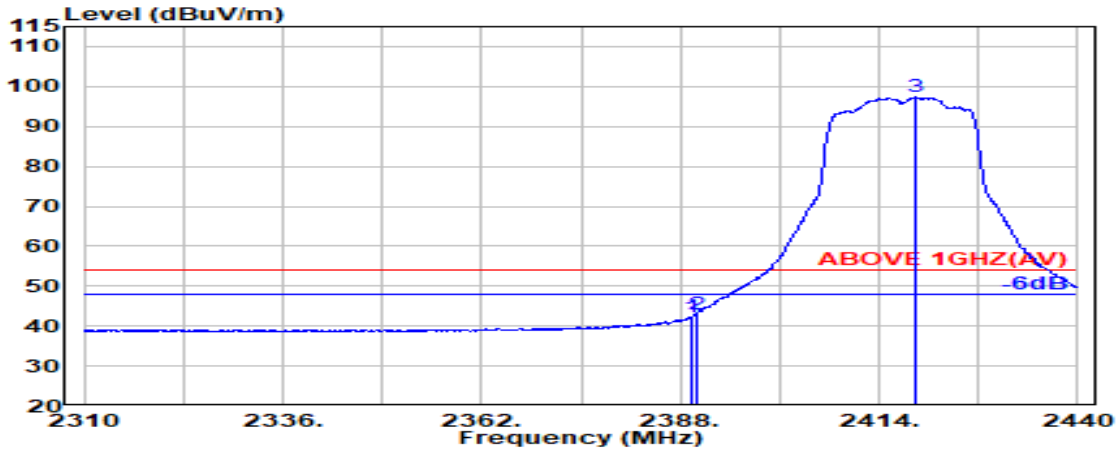


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	42.68	42.39	54.00	11.61	Average
2390.000	28.18	6.03	34.51	43.16	42.86	54.00	11.14	Average
@ 2418.700	28.21	6.08	34.51	97.56	97.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

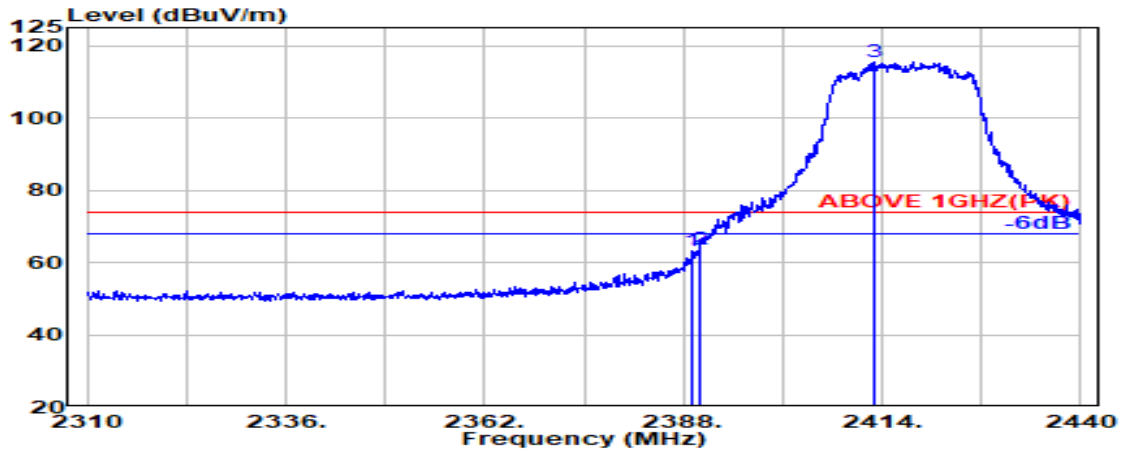

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.51	63.42	63.13	74.00	10.87	Peak
2390.000	28.18	6.03	34.51	63.73	63.44	74.00	10.56	Peak
@ 2412.900	28.18	6.07	34.51	115.93	115.67	---	---	Peak

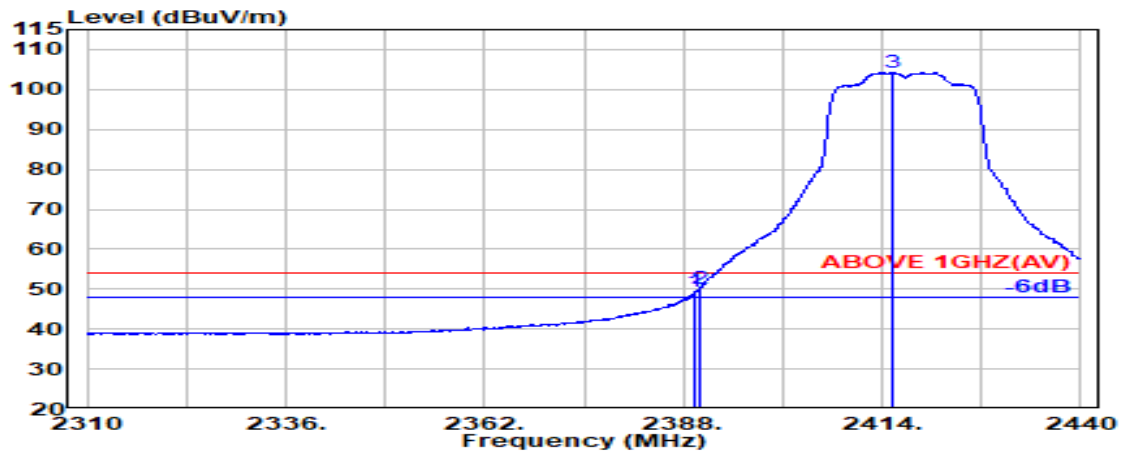


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	49.53	49.24	54.00	4.76	Average
2390.000	28.18	6.03	34.51	50.27	49.98	54.00	4.02	Average
@ 2415.400	28.19	6.07	34.51	104.61	104.36	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

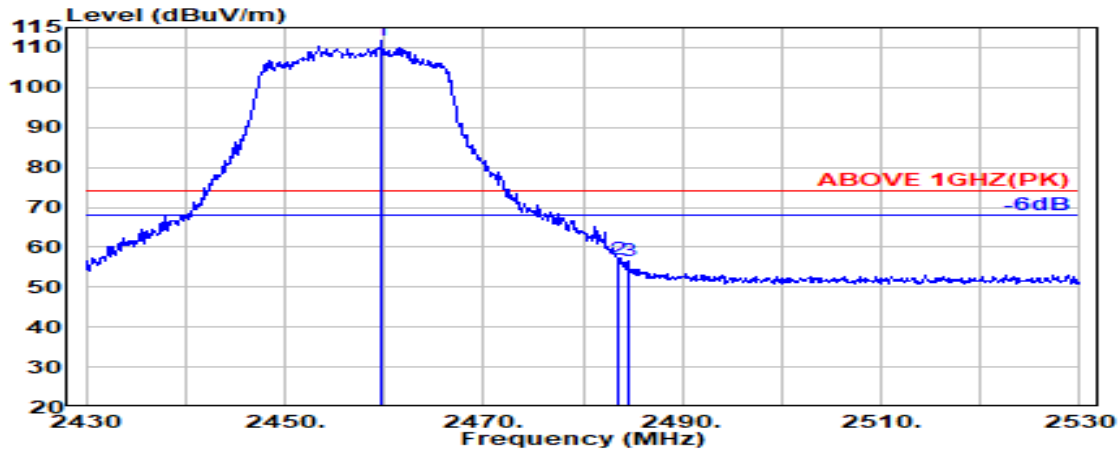

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.800	28.42	6.13	34.52	111.58	111.62	---	---	Peak
2483.500	28.47	6.17	34.53	56.69	56.80	74.00	17.20	Peak
2484.500	28.47	6.17	34.53	56.50	56.61	74.00	17.39	Peak

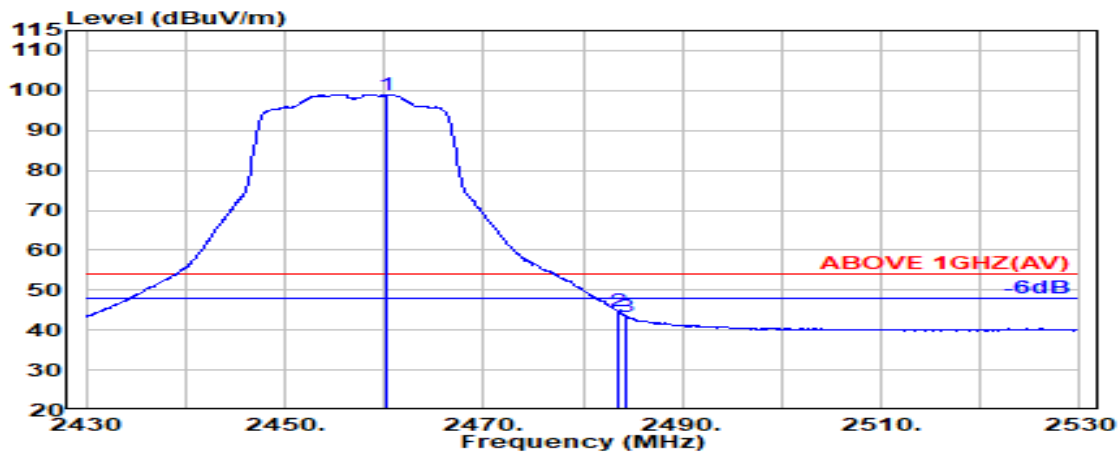


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.300	28.42	6.13	34.52	99.00	99.04	---	---	Average
2483.500	28.47	6.17	34.53	44.67	44.78	54.00	9.22	Average
2484.400	28.47	6.17	34.53	43.31	43.42	54.00	10.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

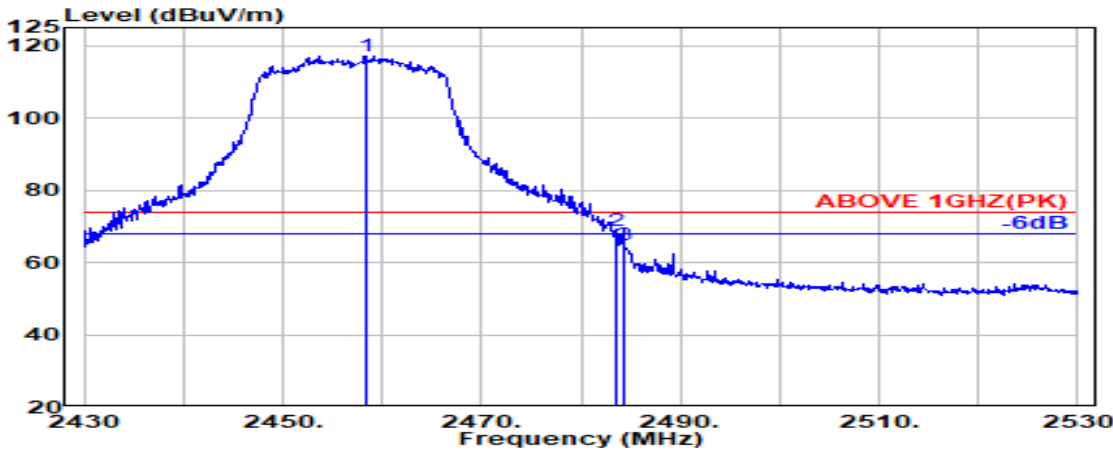

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	28.42	6.13	34.52	117.20	117.23	---	---	Peak
2483.500	28.47	6.17	34.53	68.49	68.59	74.00	5.41	Peak
2484.400	28.47	6.17	34.53	64.67	64.78	74.00	9.22	Peak

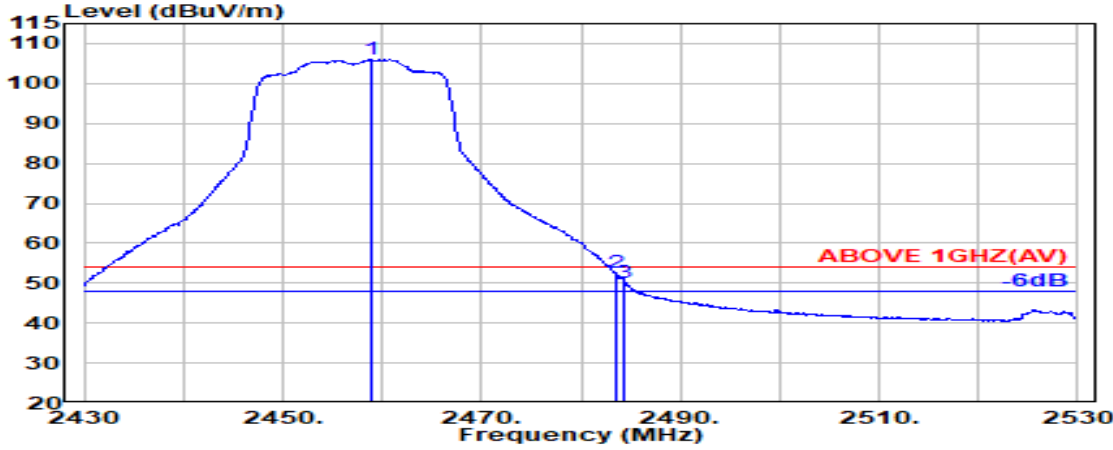


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	28.42	6.13	34.52	106.00	106.03	---	---	Average
2483.500	28.47	6.17	34.53	52.36	52.46	54.00	1.54	Average
2484.400	28.47	6.17	34.53	50.06	50.17	54.00	3.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

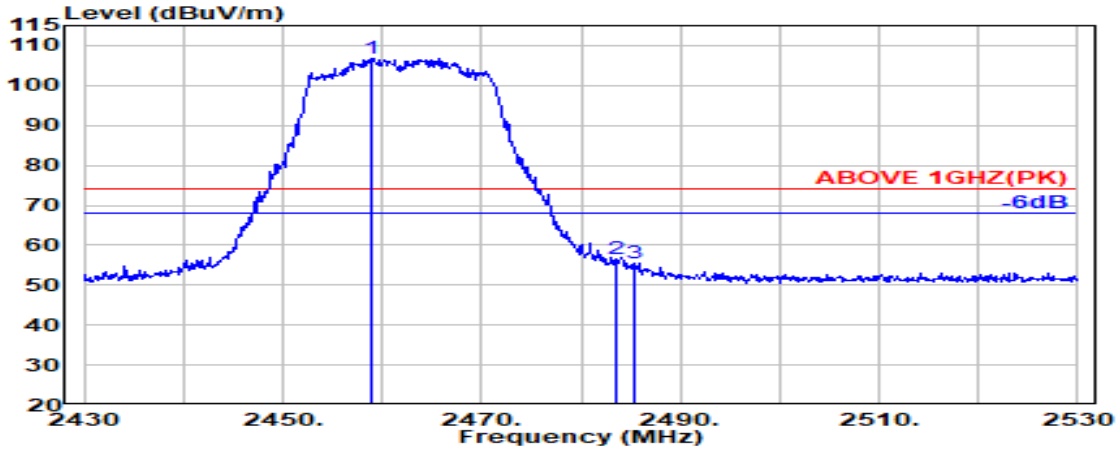

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	28.42	6.13	34.52	106.66	106.69	---	---	Peak
2483.500	28.47	6.17	34.53	56.32	56.43	74.00	17.57	Peak
2485.400	28.47	6.17	34.53	55.48	55.60	74.00	18.40	Peak

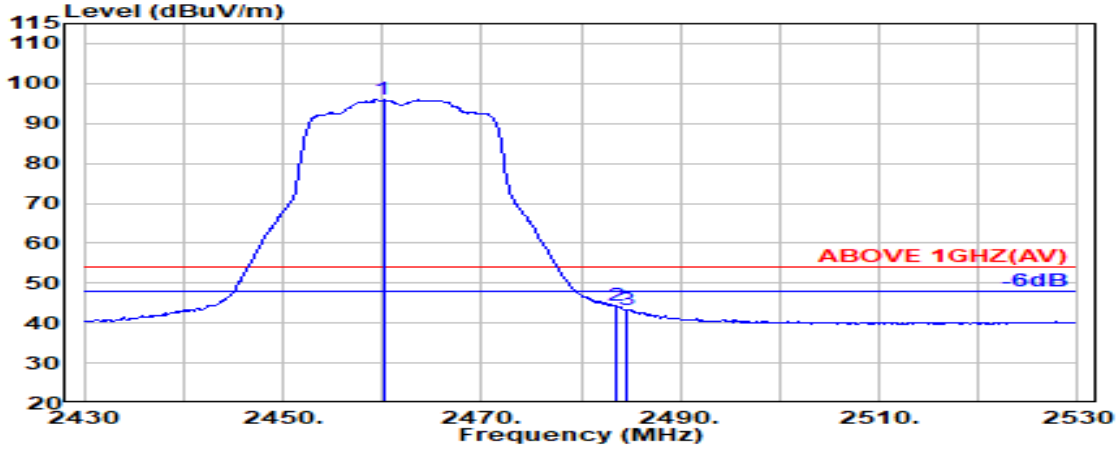


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.42	6.13	34.52	95.95	95.98	---	---	Average
2483.500	28.47	6.17	34.53	44.22	44.33	54.00	9.67	Average
2484.600	28.47	6.17	34.53	43.29	43.40	54.00	10.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

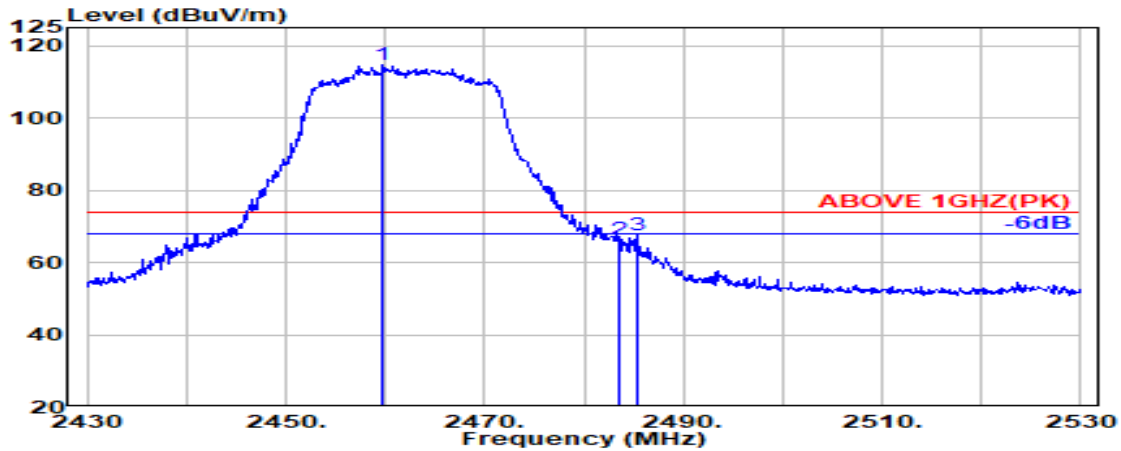

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	28.42	6.13	34.52	114.53	114.56	---	---	Peak
2483.500	28.47	6.17	34.53	66.18	66.29	74.00	7.71	Peak
2485.300	28.47	6.17	34.53	67.41	67.52	74.00	6.48	Peak

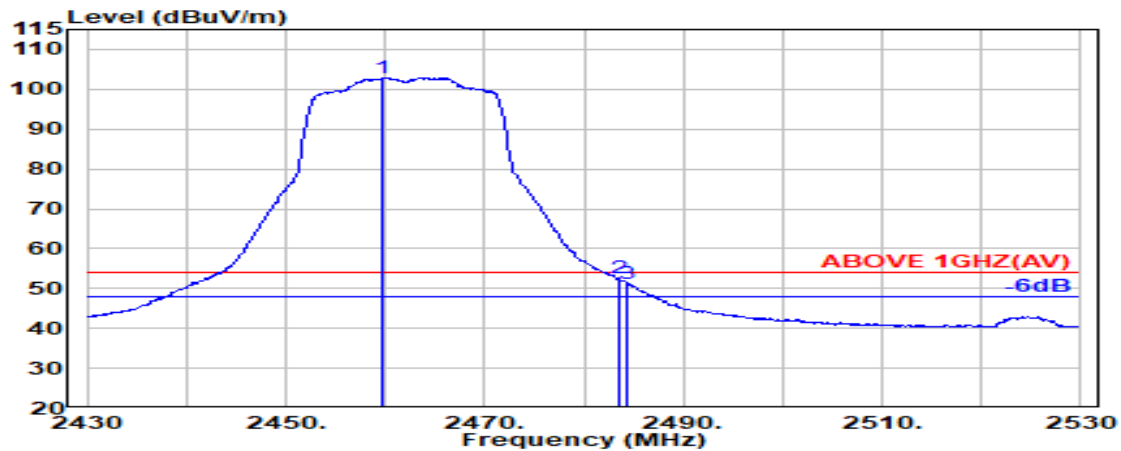


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	28.42	6.13	34.52	102.88	102.91	---	---	Average
2483.500	28.47	6.17	34.53	52.39	52.50	54.00	1.50	Average
2484.400	28.47	6.17	34.53	51.18	51.30	54.00	2.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

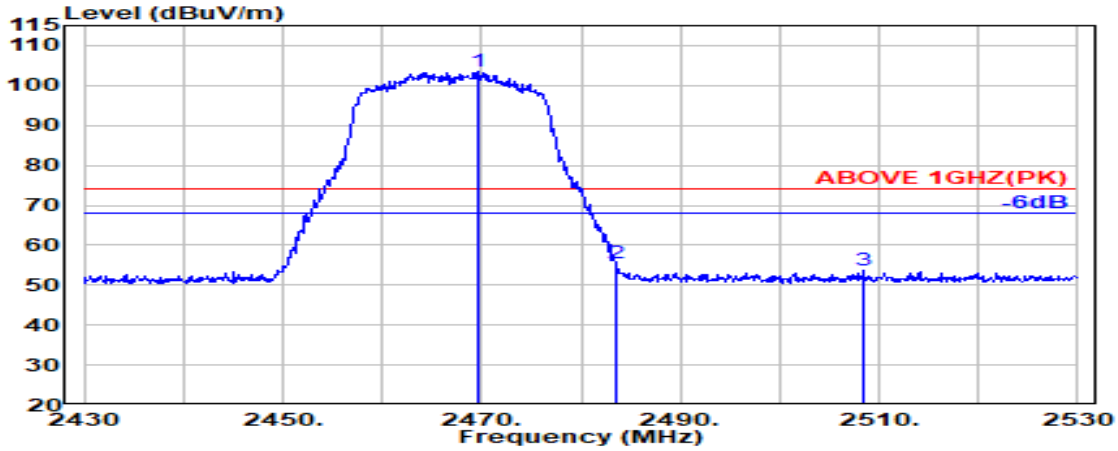

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.600	28.44	6.15	34.52	103.30	103.37	---	---	Peak
2483.500	28.47	6.17	34.53	55.41	55.52	74.00	18.48	Peak
2508.400	28.55	6.20	34.53	53.45	53.67	74.00	20.33	Peak

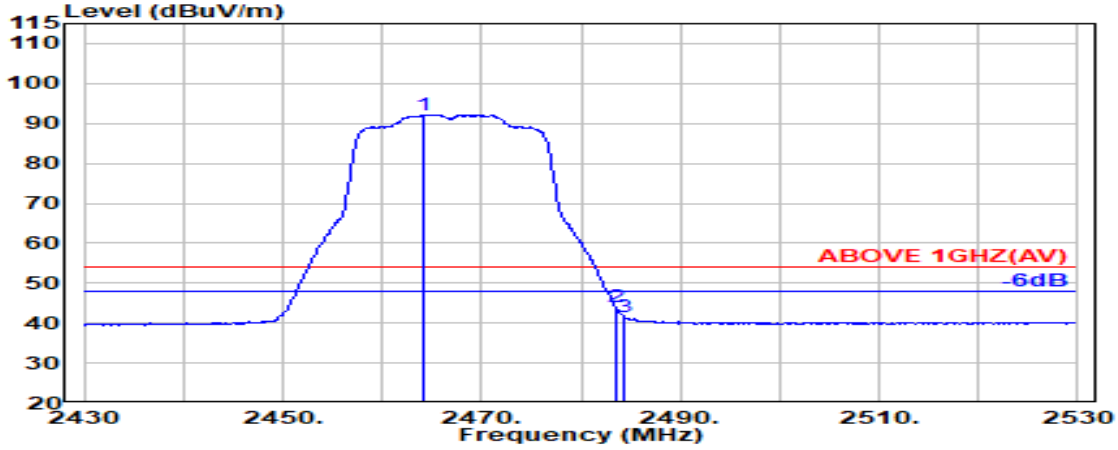


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	6.14	34.52	92.16	92.21	---	---	Average
2483.500	28.47	6.17	34.53	43.80	43.91	54.00	10.09	Average
2484.400	28.47	6.17	34.53	41.44	41.55	54.00	12.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

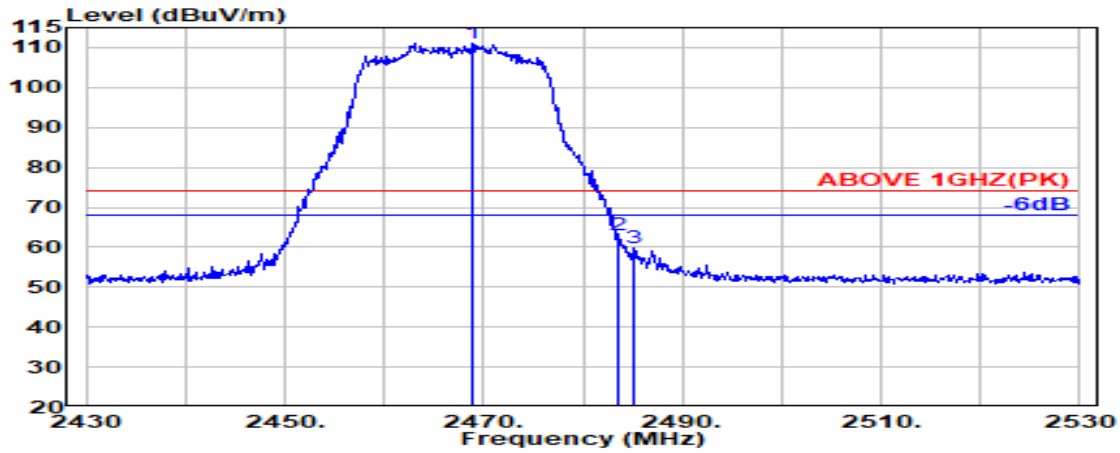

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	28.44	6.15	34.52	111.11	111.17	---	---	Peak
2483.500	28.47	6.17	34.53	62.90	63.01	74.00	10.99	Peak
2485.200	28.47	6.17	34.53	59.50	59.62	74.00	14.38	Peak

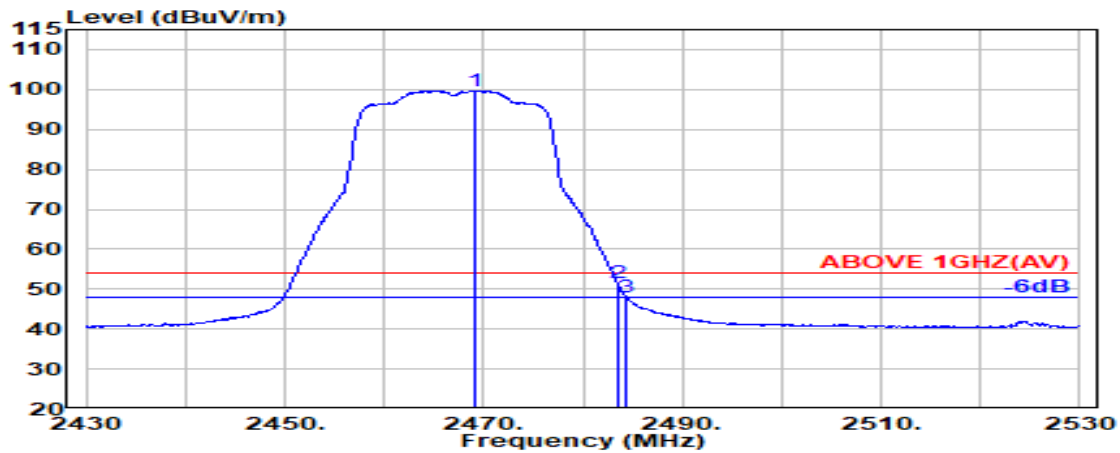

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.200	28.44	6.15	34.52	99.62	99.68	---	---	Average
2483.500	28.47	6.17	34.53	51.36	51.47	54.00	2.53	Average
2484.400	28.47	6.17	34.53	47.73	47.84	54.00	6.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.700	28.45	6.15	34.52	97.89	97.97	---	---	Peak
2483.500	28.47	6.17	34.53	62.78	62.88	74.00	11.12	Peak
2485.500	28.47	6.17	34.53	52.80	52.91	74.00	21.09	Peak

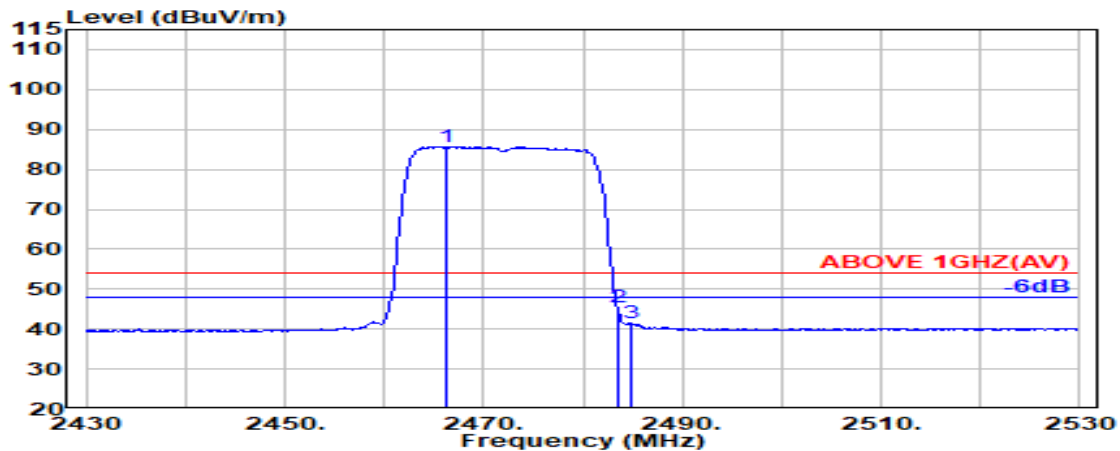


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	6.14	34.52	85.69	85.75	---	---	Average
2483.500	28.47	6.17	34.53	45.17	45.28	54.00	8.72	Average
2484.800	28.47	6.17	34.53	41.48	41.60	54.00	12.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

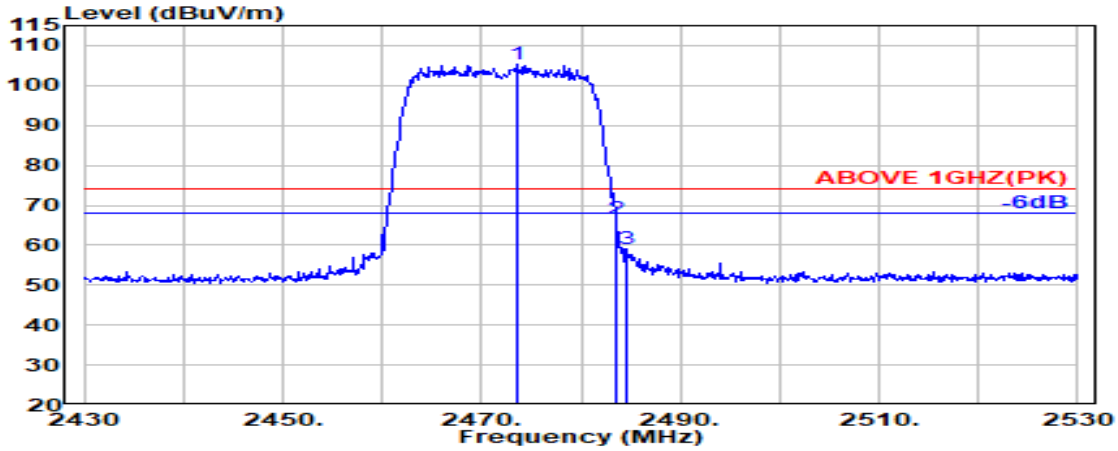

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.500	28.45	6.15	34.52	105.37	105.45	---	---	Peak
2483.500	28.47	6.17	34.53	66.60	66.71	74.00	7.29	Peak
2484.500	28.47	6.17	34.53	58.86	58.97	74.00	15.03	Peak

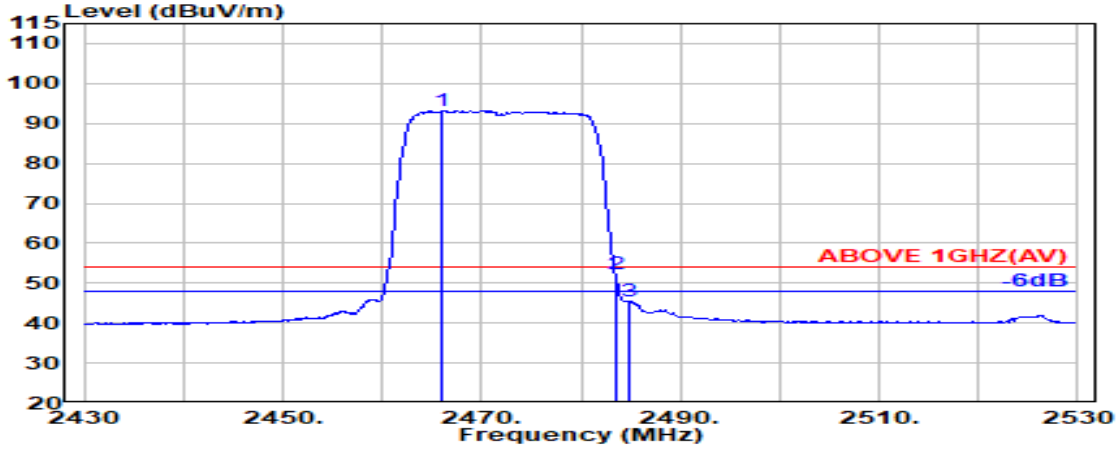


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	28.43	6.14	34.52	93.16	93.21	---	---	Average
2483.500	28.47	6.17	34.53	51.99	52.10	54.00	1.90	Average
2484.900	28.47	6.17	34.53	45.49	45.60	54.00	8.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

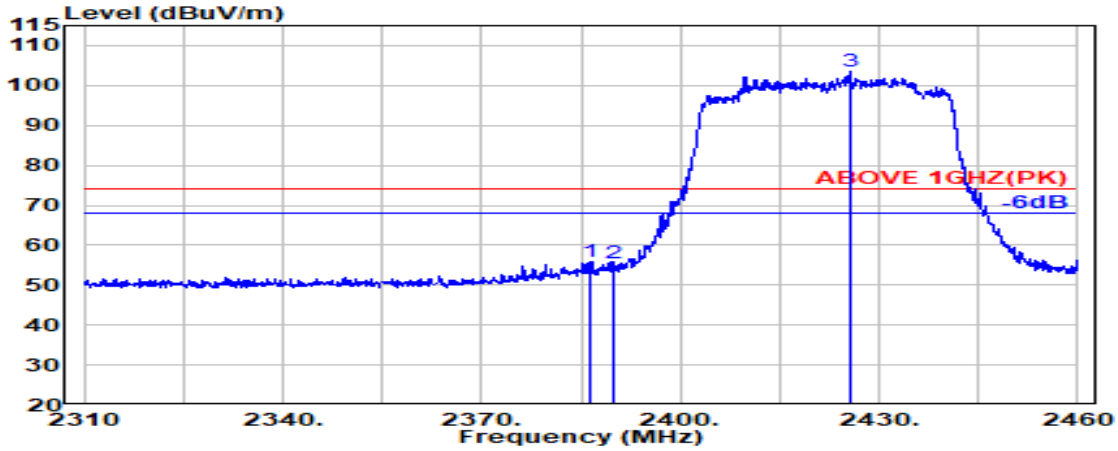

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	28.21	6.03	34.51	56.18	55.91	74.00	18.09	Peak
2390.000	28.18	6.03	34.51	55.96	55.66	74.00	18.34	Peak
@ 2425.500	28.25	6.09	34.52	103.59	103.41	---	---	Peak

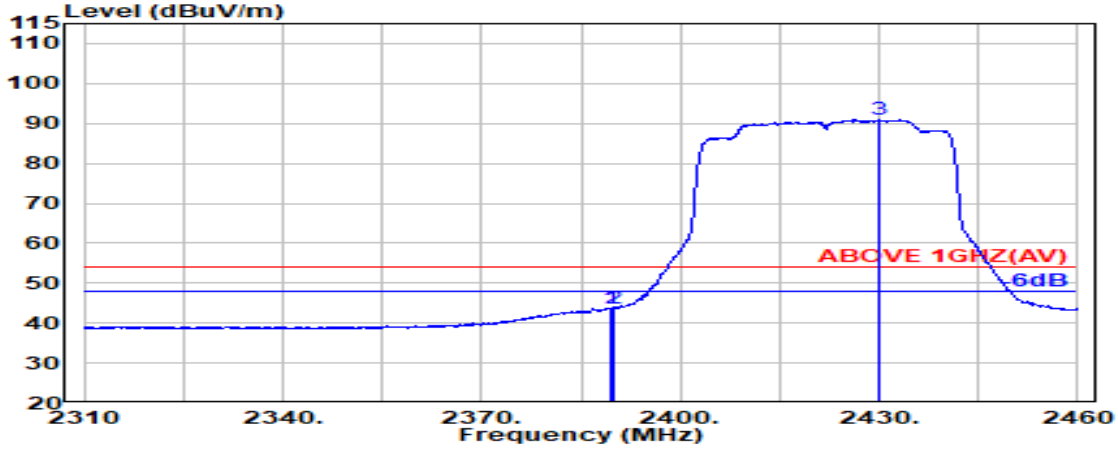


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	44.03	43.74	54.00	10.26	Average
2390.000	28.18	6.03	34.51	44.13	43.83	54.00	10.17	Average
@ 2429.900	28.28	6.09	34.52	91.09	90.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

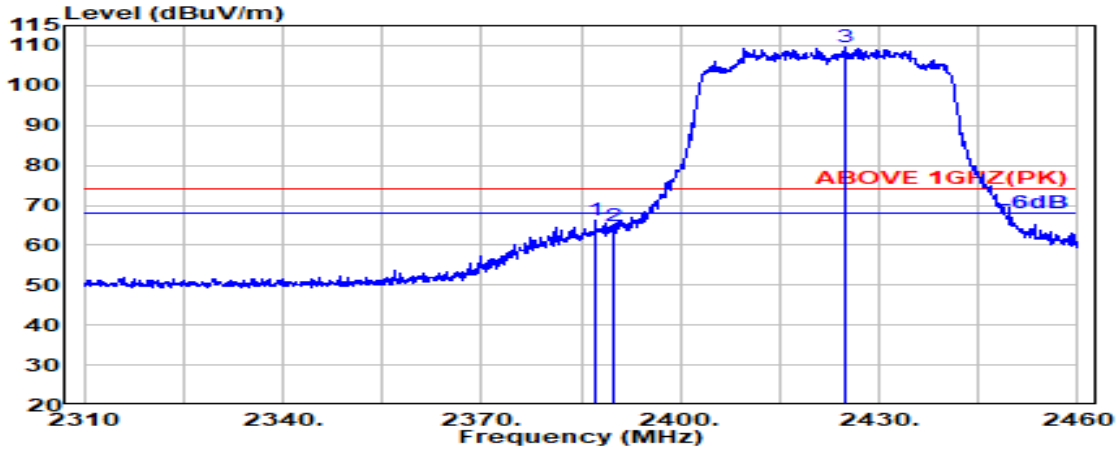

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	28.20	6.03	34.51	66.37	66.10	74.00	7.90	Peak
2390.000	28.18	6.03	34.51	65.09	64.80	74.00	9.20	Peak
@ 2424.900	28.25	6.08	34.51	109.90	109.72	---	---	Peak

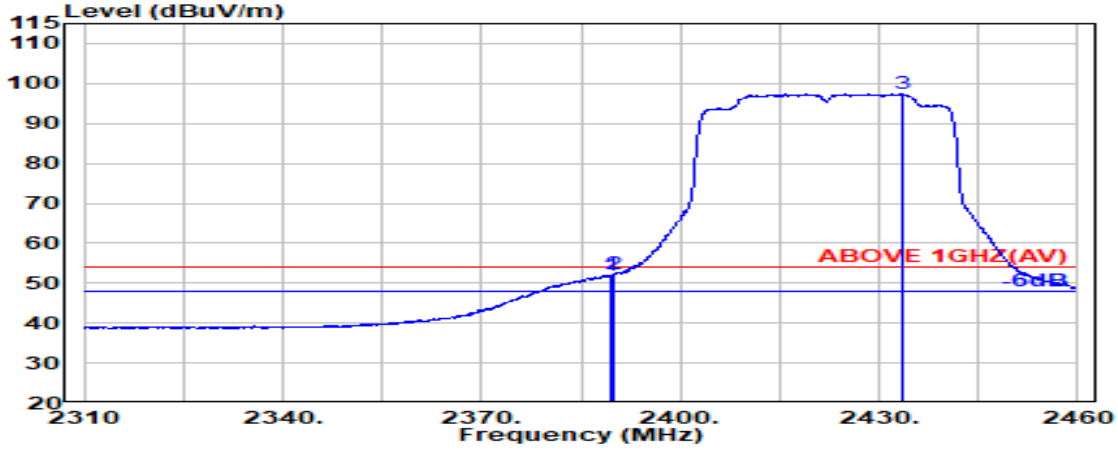


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	52.15	51.86	54.00	2.14	Average
2390.000	28.18	6.03	34.51	52.51	52.22	54.00	1.78	Average
@ 2433.400	28.30	6.10	34.52	97.49	97.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

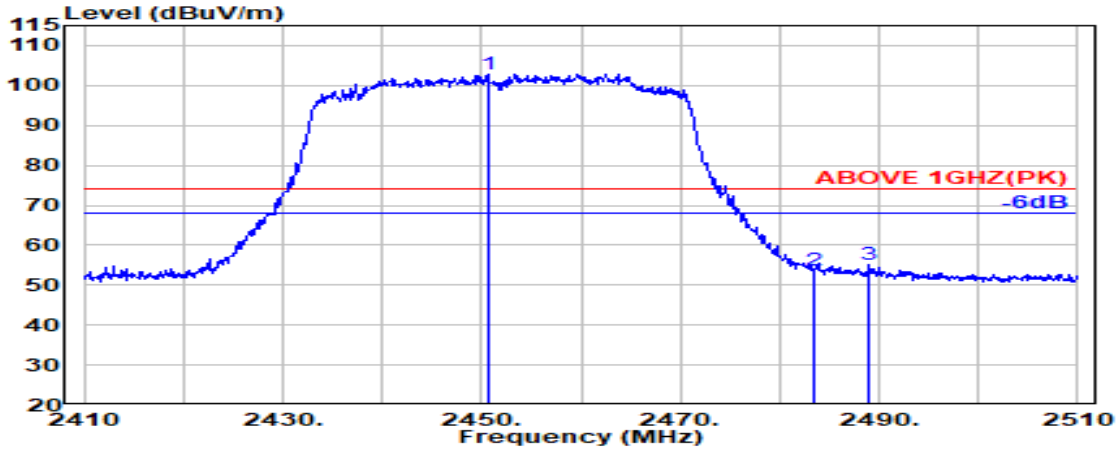

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.600	28.40	6.12	34.52	102.99	102.99	---	---	Peak
2483.500	28.47	6.17	34.53	53.53	53.63	74.00	20.37	Peak
2489.000	28.48	6.17	34.53	54.96	55.09	74.00	18.91	Peak

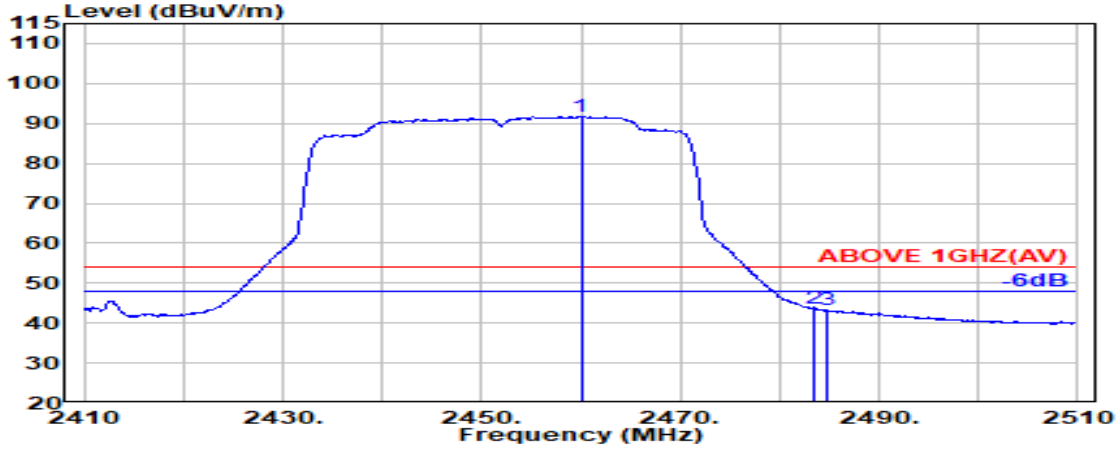


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	28.42	6.13	34.52	91.80	91.83	---	---	Average
2483.500	28.47	6.17	34.53	43.72	43.83	54.00	10.17	Average
2484.700	28.47	6.17	34.53	43.32	43.43	54.00	10.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

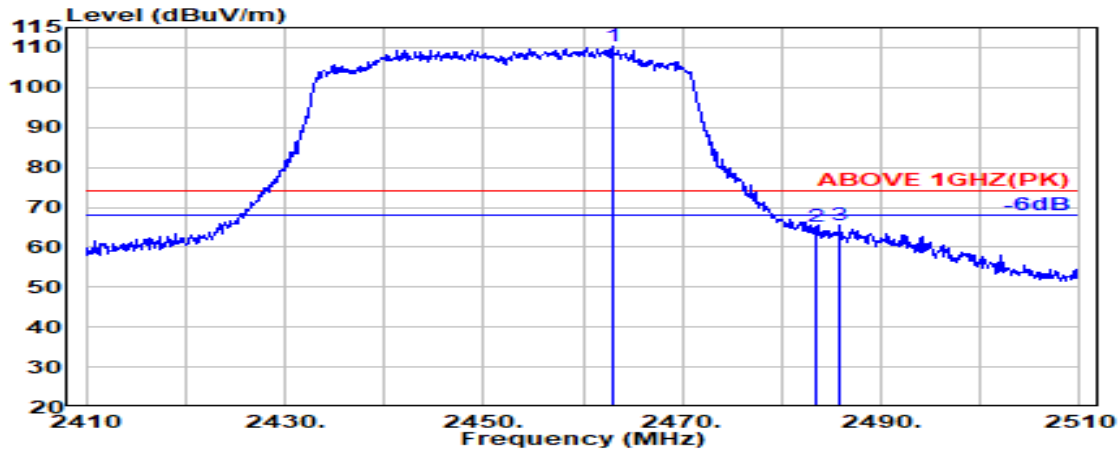

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.900	28.43	6.14	34.52	110.26	110.30	---	---	Peak
2483.500	28.47	6.17	34.53	65.21	65.32	74.00	8.68	Peak
2485.900	28.47	6.17	34.53	65.27	65.39	74.00	8.61	Peak

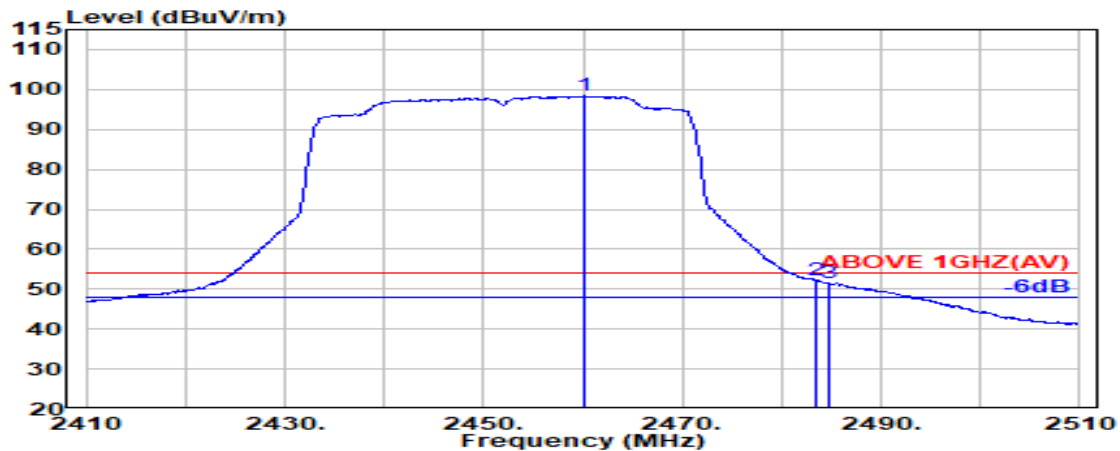


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	28.42	6.13	34.52	98.49	98.52	---	---	Average
2483.500	28.47	6.17	34.53	52.13	52.24	54.00	1.76	Average
2484.700	28.47	6.17	34.53	51.55	51.66	54.00	2.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

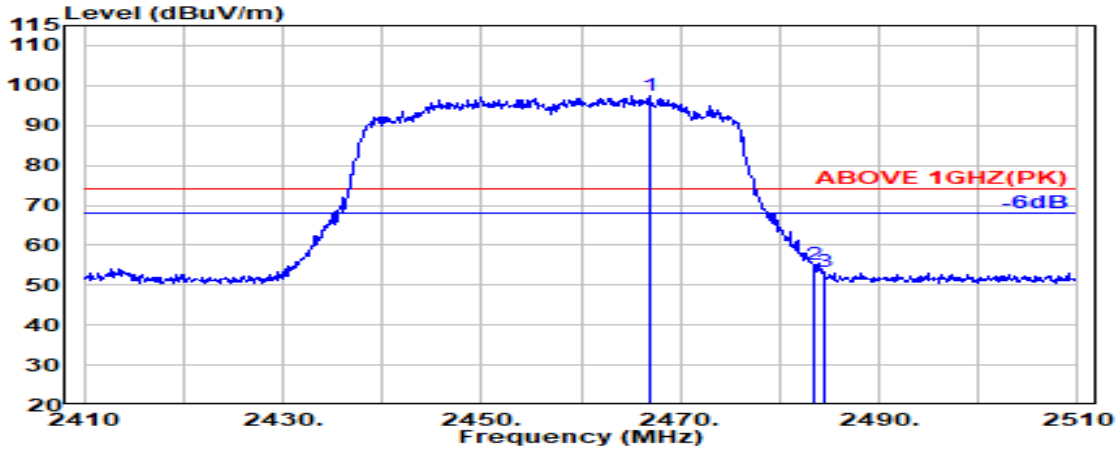

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.900	28.43	6.14	34.52	97.41	97.47	---	---	Peak
2483.500	28.47	6.17	34.53	55.10	55.20	74.00	18.80	Peak
2484.400	28.47	6.17	34.53	53.21	53.32	74.00	20.68	Peak

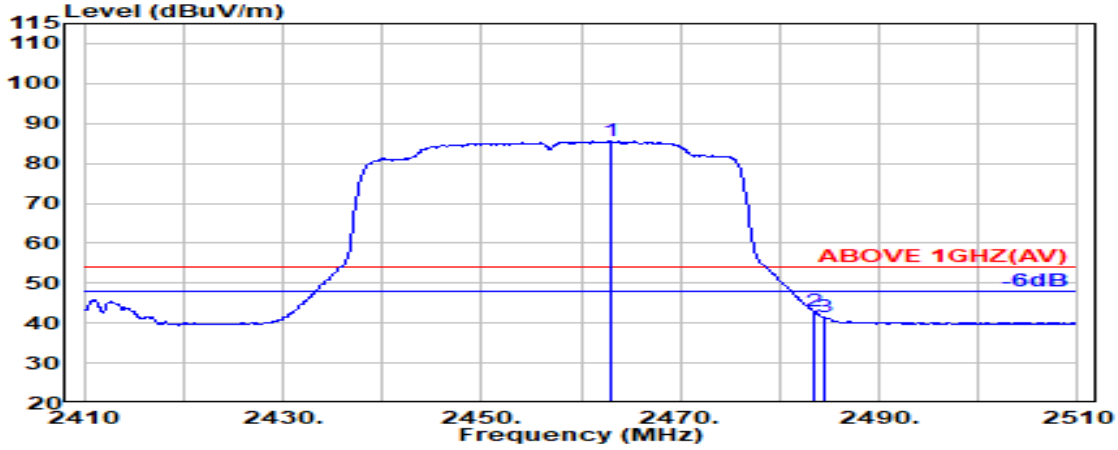


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.900	28.43	6.14	34.52	85.40	85.44	---	---	Average
2483.500	28.47	6.17	34.53	42.82	42.93	54.00	11.07	Average
2484.500	28.47	6.17	34.53	41.25	41.36	54.00	12.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

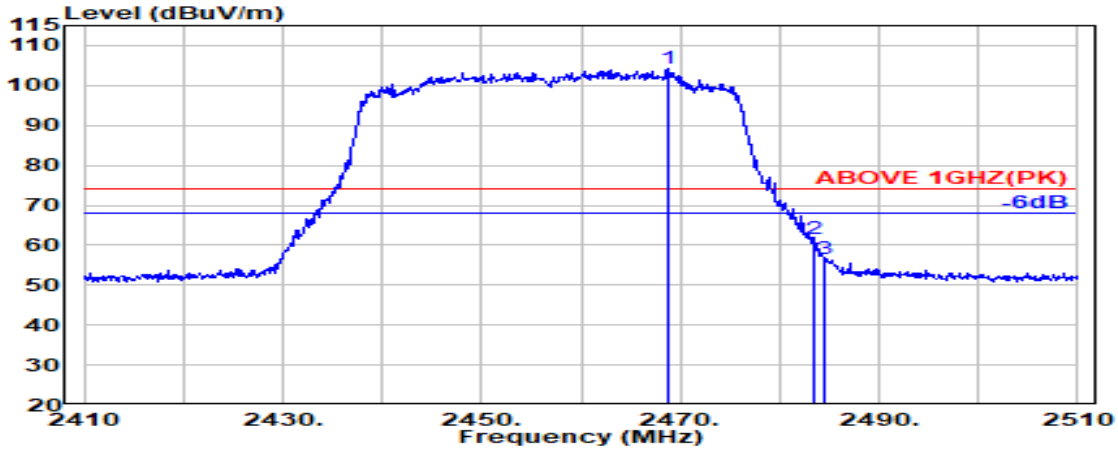

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.700	28.44	6.15	34.52	104.04	104.10	---	---	Peak
2483.500	28.47	6.17	34.53	61.34	61.45	74.00	12.55	Peak
2484.600	28.47	6.17	34.53	56.62	56.73	74.00	17.27	Peak

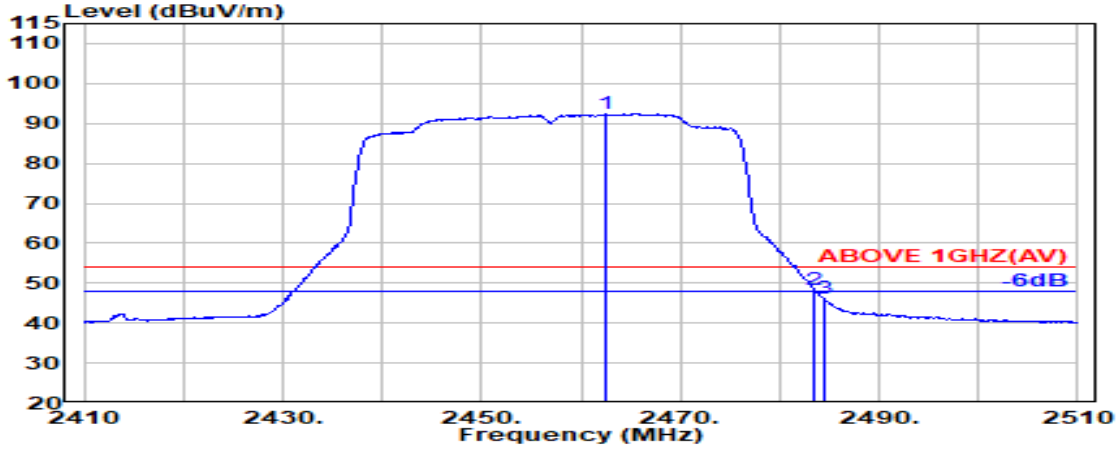


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.400	28.42	6.14	34.52	92.46	92.50	---	---	Average
2483.500	28.47	6.17	34.53	48.25	48.36	54.00	5.64	Average
2484.400	28.47	6.17	34.53	46.00	46.11	54.00	7.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

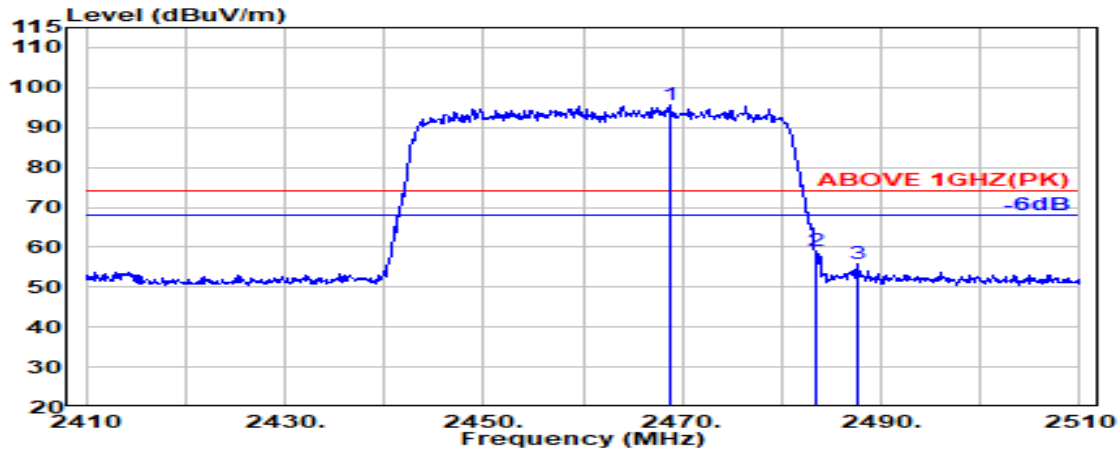

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	28.44	6.15	34.52	95.42	95.48	---	---	Peak
2483.500	28.47	6.17	34.53	58.96	59.07	74.00	14.93	Peak
2487.600	28.48	6.17	34.53	55.86	55.98	74.00	18.02	Peak

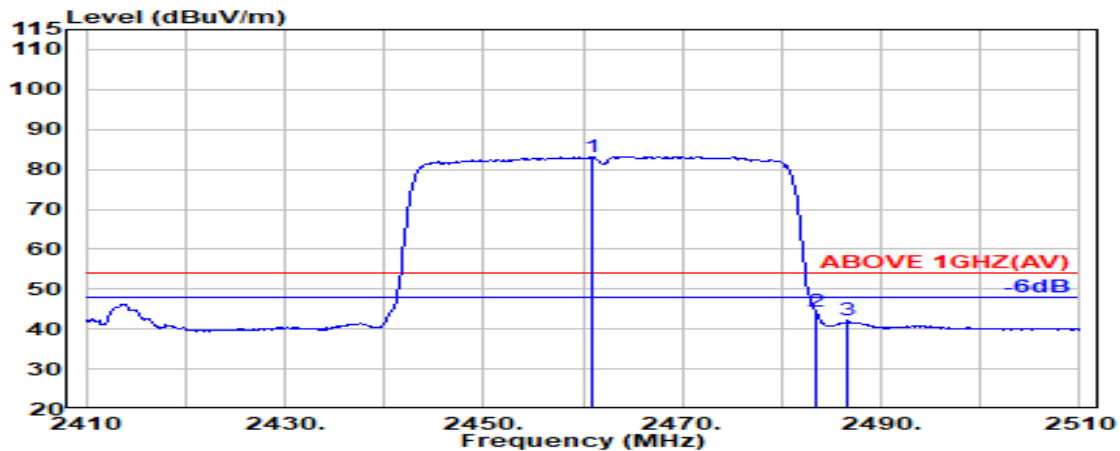


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.42	6.14	34.52	83.20	83.23	---	---	Average
2483.500	28.47	6.17	34.53	44.13	44.24	54.00	9.76	Average
2486.700	28.47	6.17	34.53	41.99	42.11	54.00	11.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

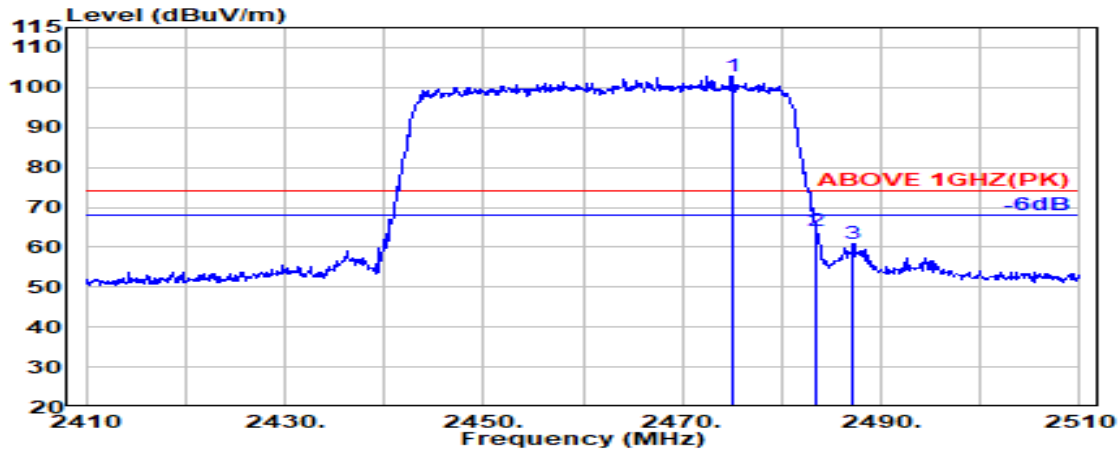

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.100	28.45	6.16	34.53	102.59	102.67	---	---	Peak
2483.500	28.47	6.17	34.53	63.93	64.04	74.00	9.96	Peak
2487.200	28.47	6.17	34.53	60.67	60.79	74.00	13.21	Peak

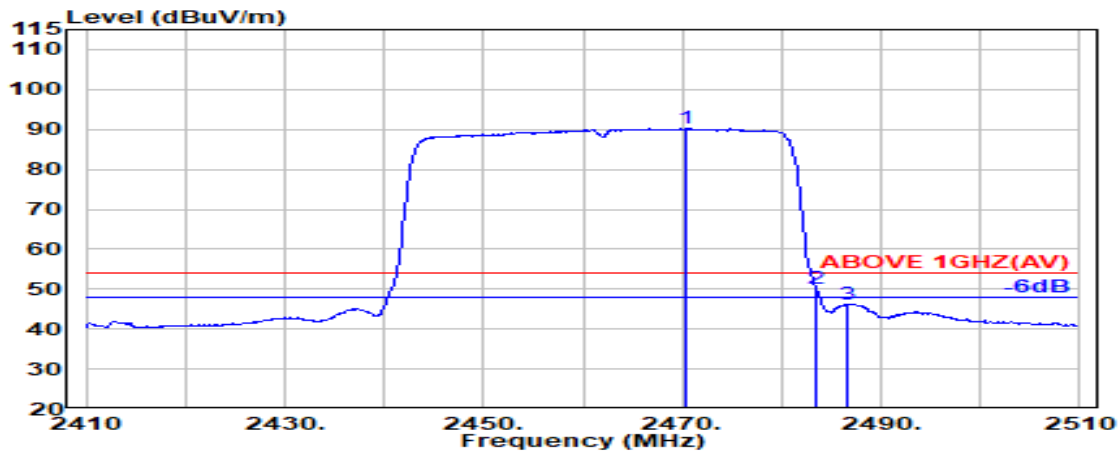


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.400	28.44	6.15	34.52	90.13	90.20	---	---	Average
2483.500	28.47	6.17	34.53	49.83	49.94	54.00	4.06	Average
2486.600	28.47	6.17	34.53	46.23	46.35	54.00	7.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

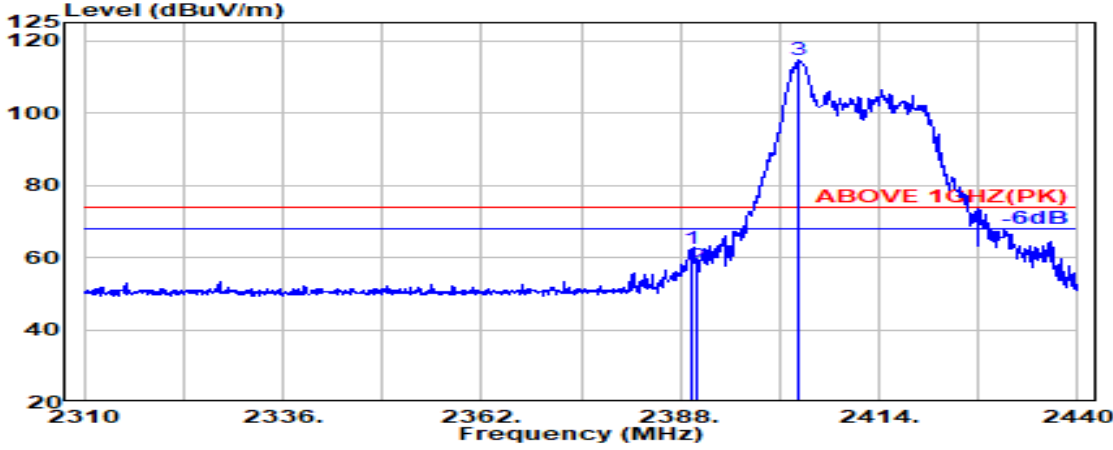

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	62.77	62.47	74.00	11.53	Peak
2390.000	28.18	6.03	34.51	57.76	57.47	74.00	16.53	Peak
@ 2403.500	28.12	6.05	34.51	114.94	114.61	---	---	Peak

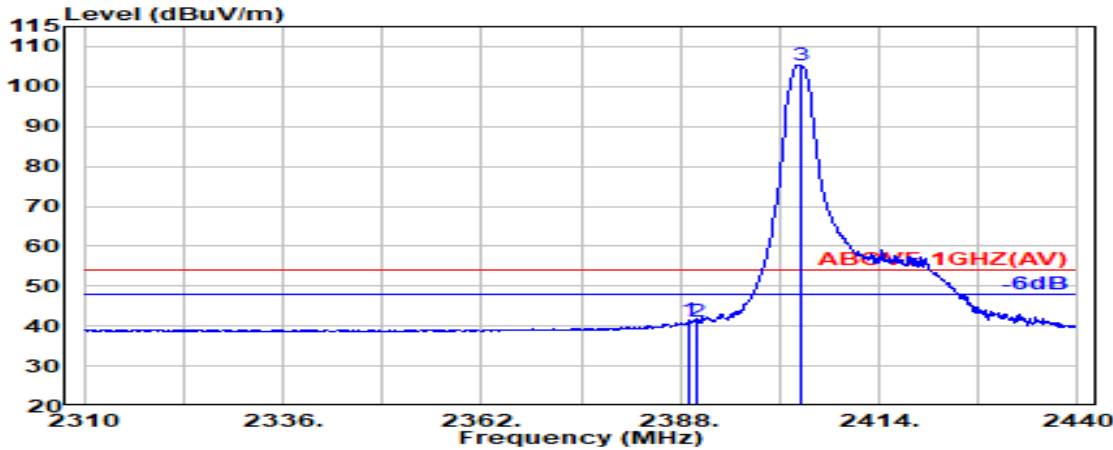


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.51	41.70	41.41	54.00	12.59	Average
2390.000	28.18	6.03	34.51	41.35	41.06	54.00	12.94	Average
@ 2403.900	28.12	6.05	34.51	105.69	105.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

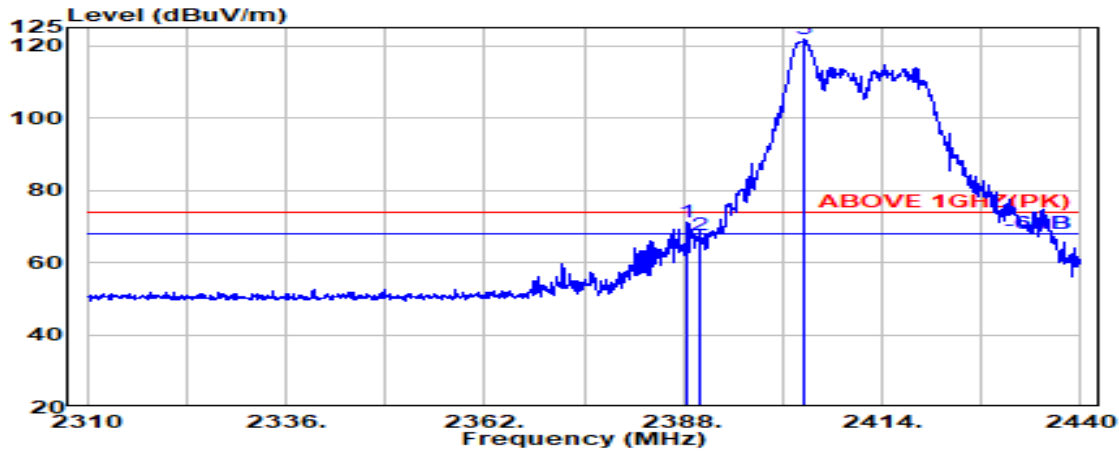

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.19	6.03	34.51	71.38	71.10	74.00	2.90	Peak
2390.000	28.18	6.03	34.51	67.97	67.68	74.00	6.32	Peak
@ 2403.800	28.12	6.05	34.51	121.97	121.64	---	---	Peak

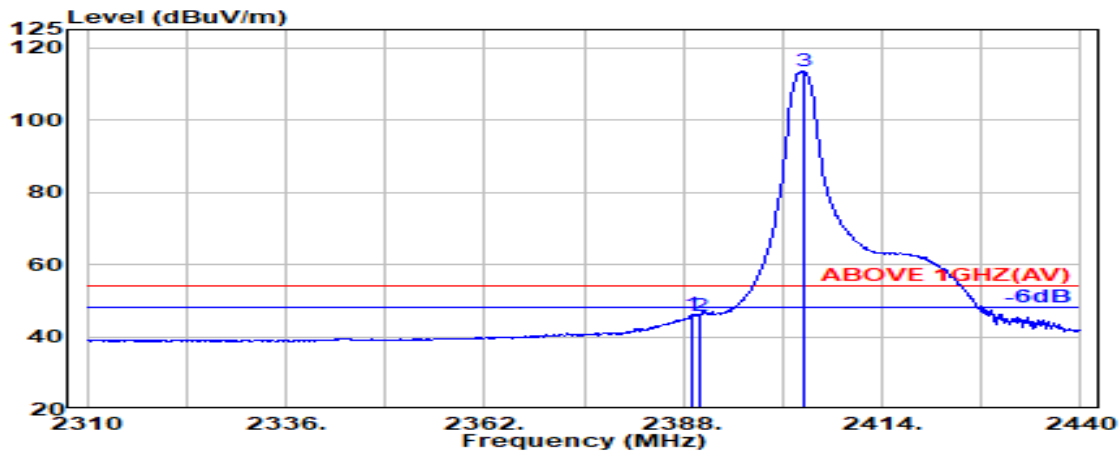


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.51	46.40	46.12	54.00	7.88	Average
2390.000	28.18	6.03	34.51	46.25	45.95	54.00	8.05	Average
@ 2403.700	28.12	6.05	34.51	113.76	113.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

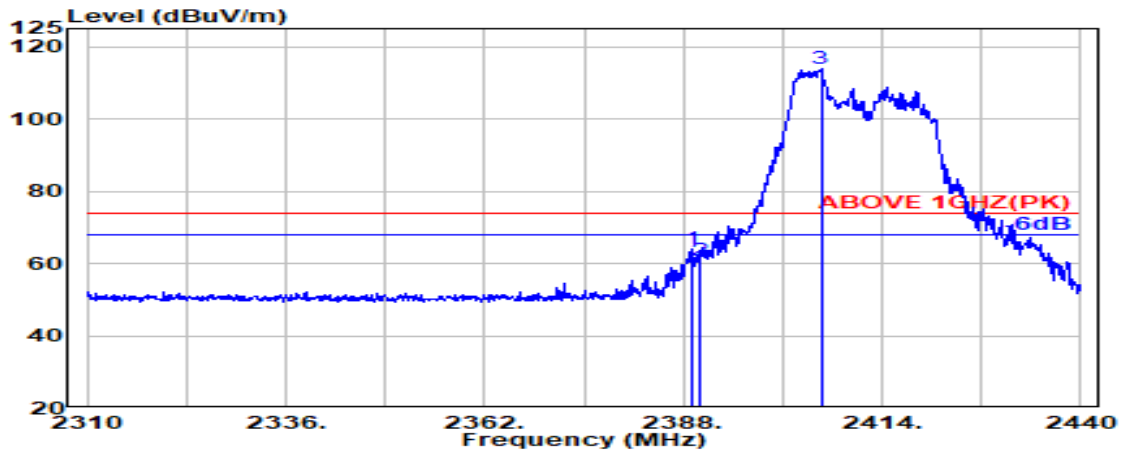

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.51	64.19	63.90	74.00	10.10	Peak
2390.000	28.18	6.03	34.51	61.25	60.96	74.00	13.04	Peak
@ 2406.000	28.14	6.06	34.51	114.12	113.81	---	---	Peak

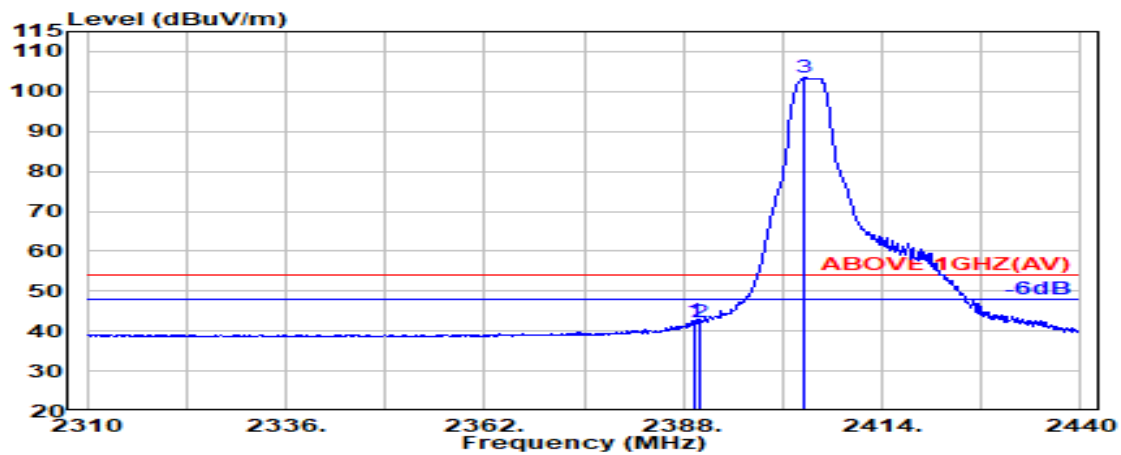


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	42.93	42.64	54.00	11.36	Average
2390.000	28.18	6.03	34.51	42.63	42.34	54.00	11.66	Average
@ 2403.900	28.12	6.05	34.51	103.75	103.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

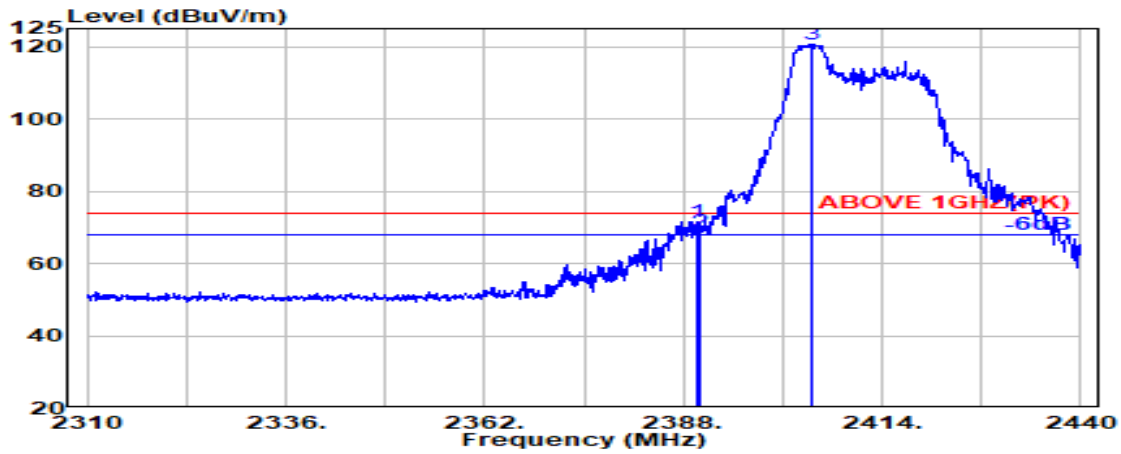

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	28.18	6.03	34.51	71.84	71.55	74.00	2.45	Peak
2390.000	28.18	6.03	34.51	69.17	68.88	74.00	5.12	Peak
@ 2404.900	28.13	6.06	34.51	120.85	120.53	---	---	Peak

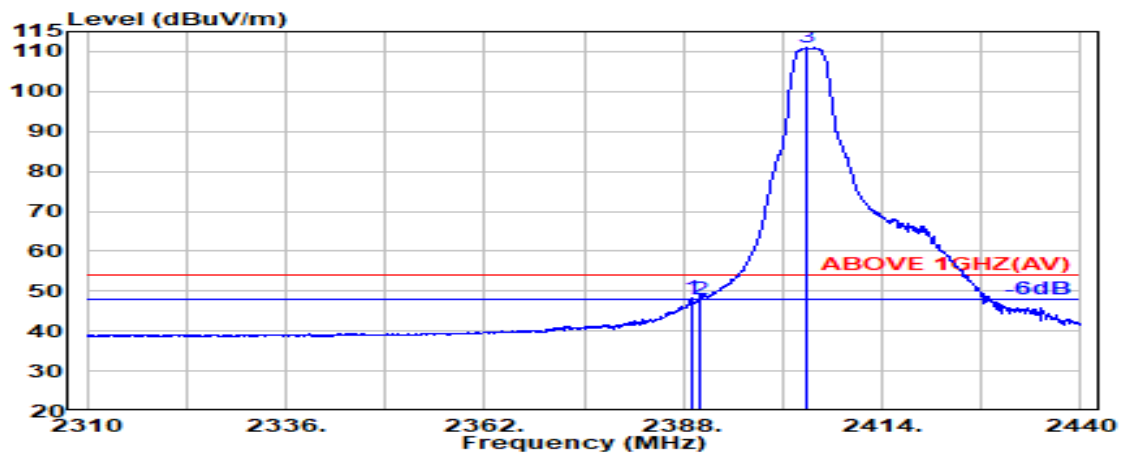


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.51	48.66	48.37	54.00	5.63	Average
2390.000	28.18	6.03	34.51	48.10	47.81	54.00	6.19	Average
@ 2404.100	28.12	6.06	34.51	111.30	110.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

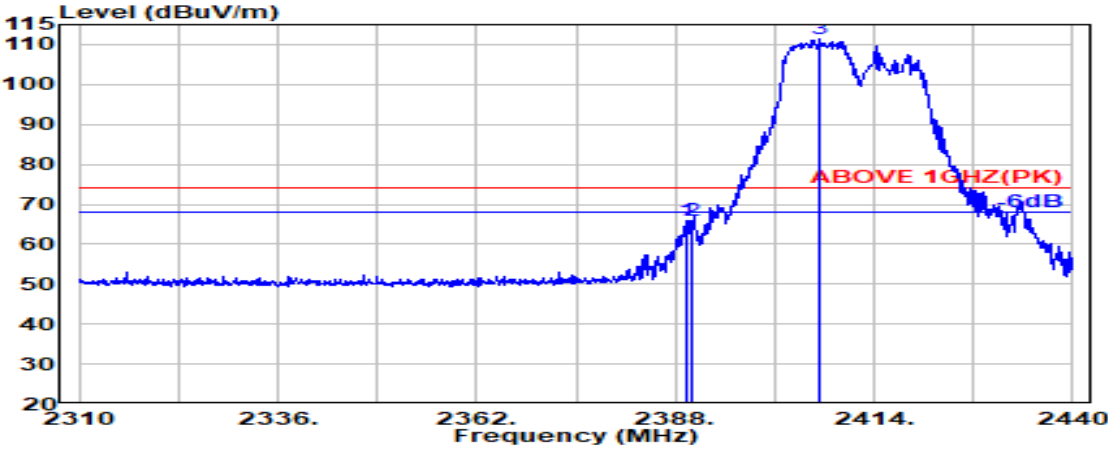

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.51	66.25	65.96	74.00	8.04	Peak
2390.000	28.18	6.03	34.51	66.29	65.99	74.00	8.01	Peak
@ 2406.700	28.14	6.06	34.51	111.60	111.29	---	---	Peak

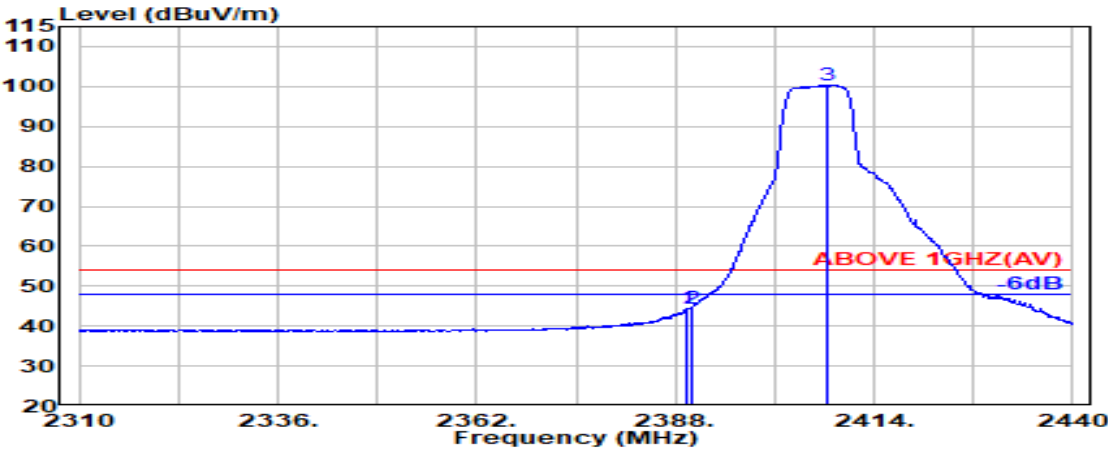


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	44.61	44.31	54.00	9.69	Average
2390.000	28.18	6.03	34.51	44.84	44.55	54.00	9.45	Average
@ 2407.900	28.15	6.06	34.51	100.71	100.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

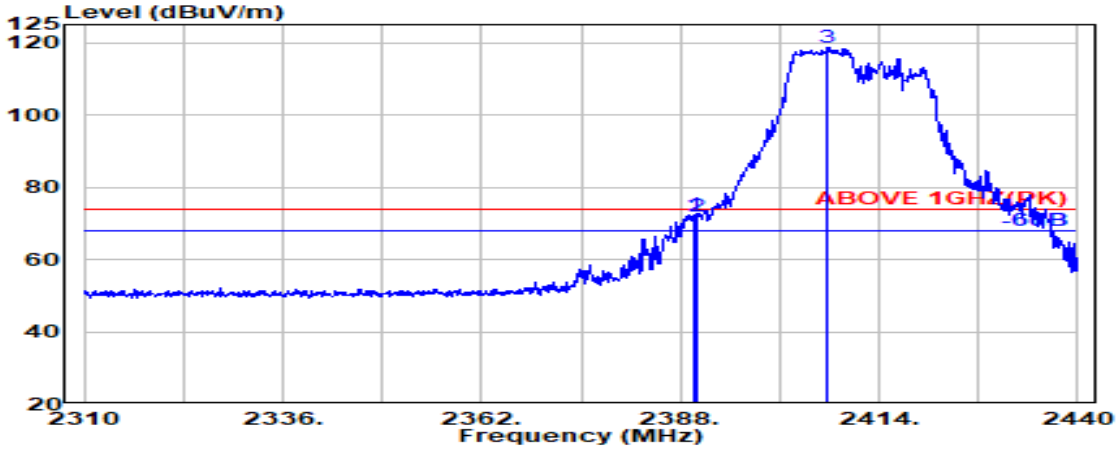

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	28.18	6.03	34.51	72.69	72.40	74.00	1.60	Peak
2390.000	28.18	6.03	34.51	72.02	71.72	74.00	2.28	Peak
@ 2407.300	28.14	6.06	34.51	118.92	118.61	---	---	Peak

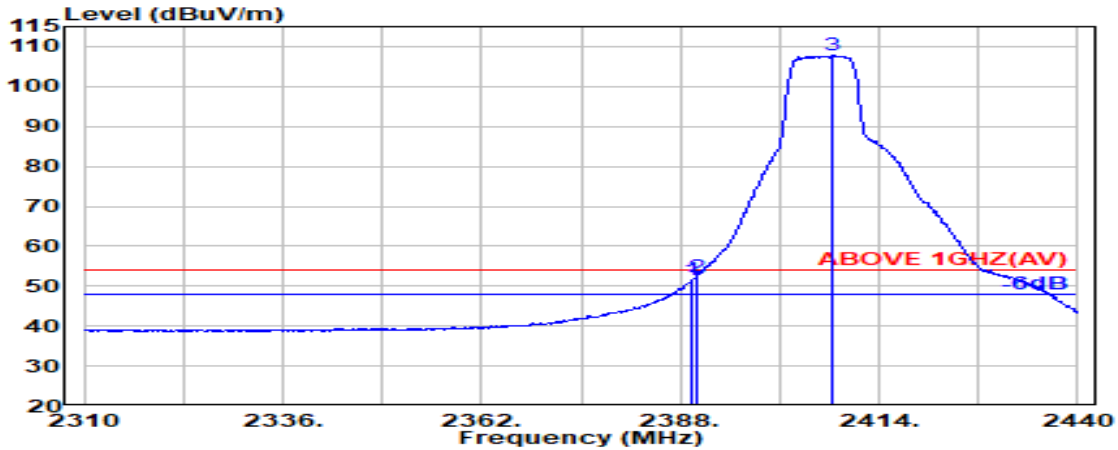


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	51.97	51.68	54.00	2.32	Average
2390.000	28.18	6.03	34.51	52.71	52.42	54.00	1.58	Average
@ 2408.000	28.15	6.06	34.51	107.98	107.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

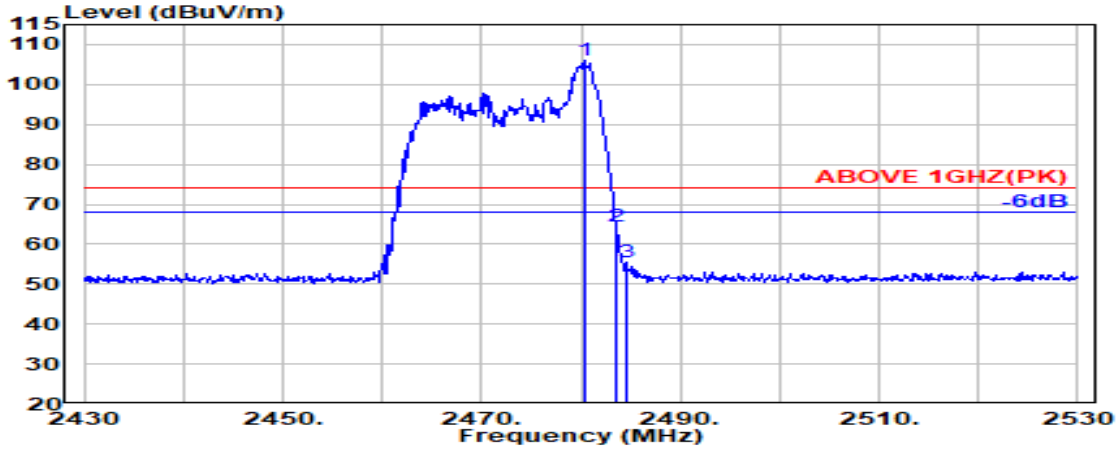

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.46	6.16	34.53	105.95	106.05	---	---	Peak
2483.500	28.47	6.17	34.53	64.41	64.52	74.00	9.48	Peak
2484.500	28.47	6.17	34.53	55.28	55.39	74.00	18.61	Peak

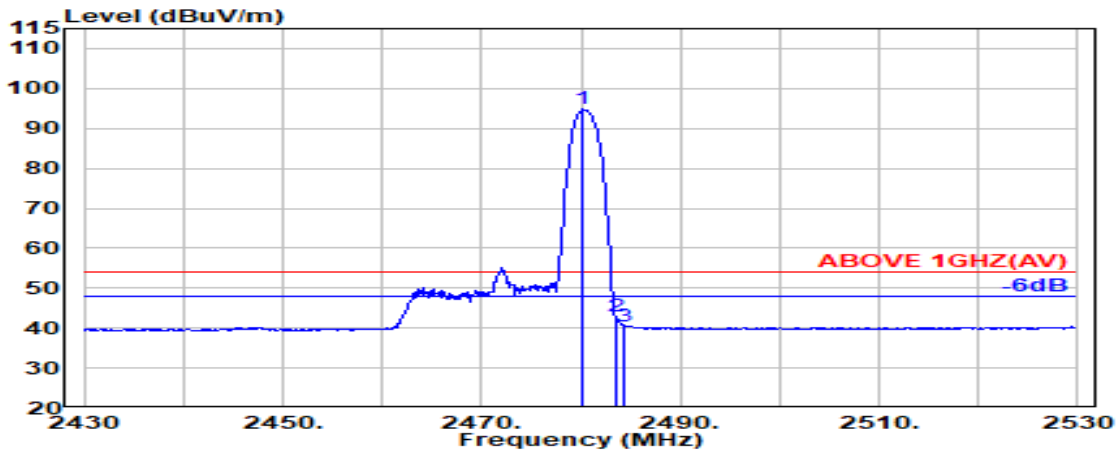


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	34.53	94.65	94.75	---	---	Average
2483.500	28.47	6.17	34.53	42.95	43.06	54.00	10.94	Average
2484.400	28.47	6.17	34.53	40.46	40.57	54.00	13.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

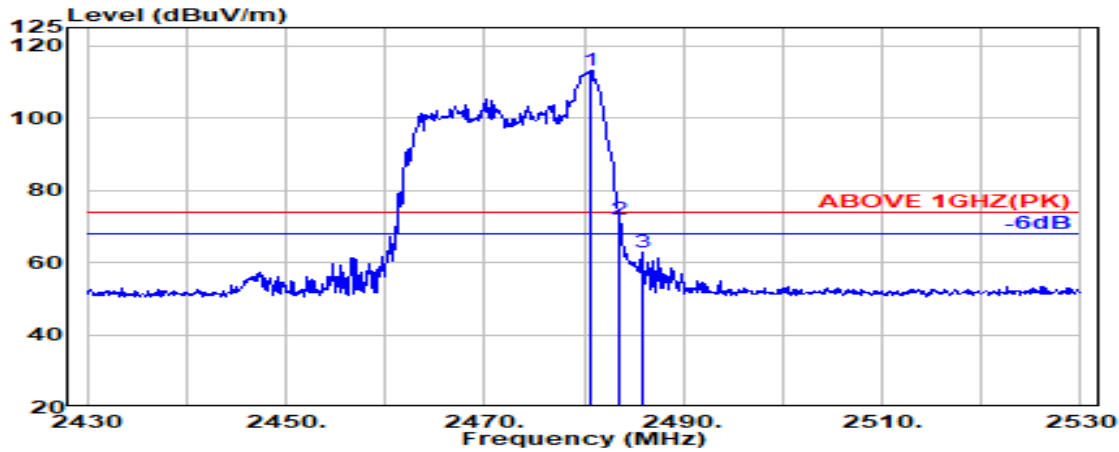

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.700	28.46	6.16	34.53	113.06	113.16	---	---	Peak
2483.500	28.47	6.17	34.53	71.76	71.87	74.00	2.13	Peak
2485.800	28.47	6.17	34.53	62.63	62.75	74.00	11.25	Peak

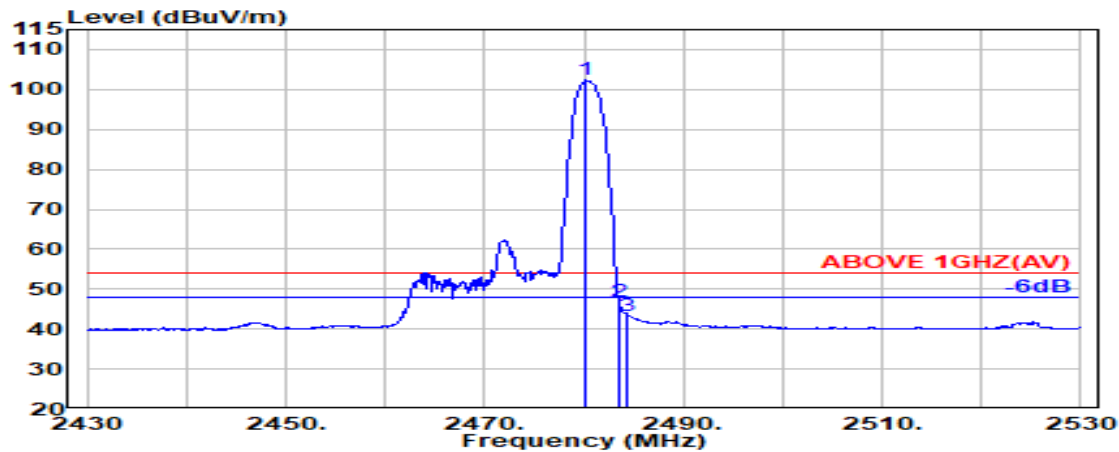


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	34.53	102.18	102.28	---	---	Average
2483.500	28.47	6.17	34.53	46.84	46.95	54.00	7.05	Average
2484.400	28.47	6.17	34.53	43.30	43.41	54.00	10.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

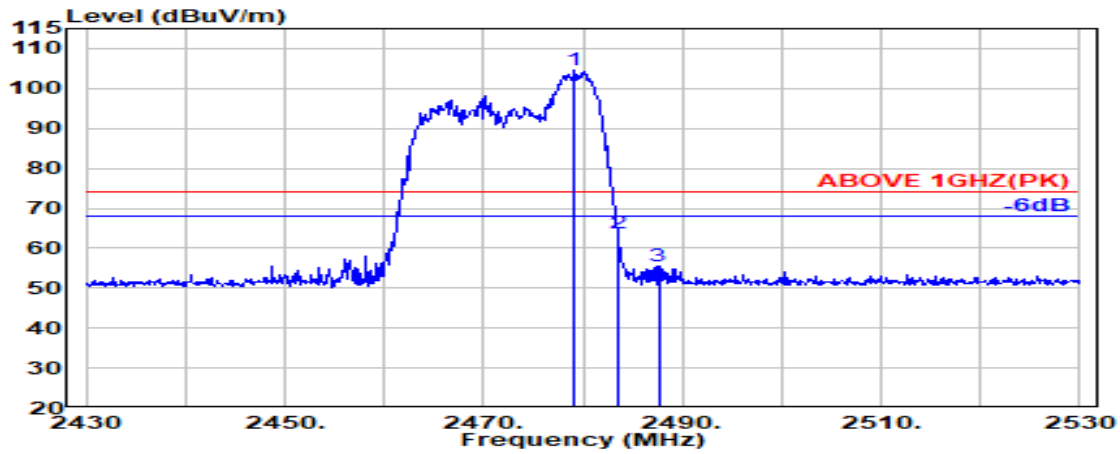

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.46	6.16	34.53	104.65	104.74	---	---	Peak
2483.500	28.47	6.17	34.53	63.46	63.57	74.00	10.43	Peak
2487.600	28.48	6.17	34.53	55.51	55.63	74.00	18.37	Peak

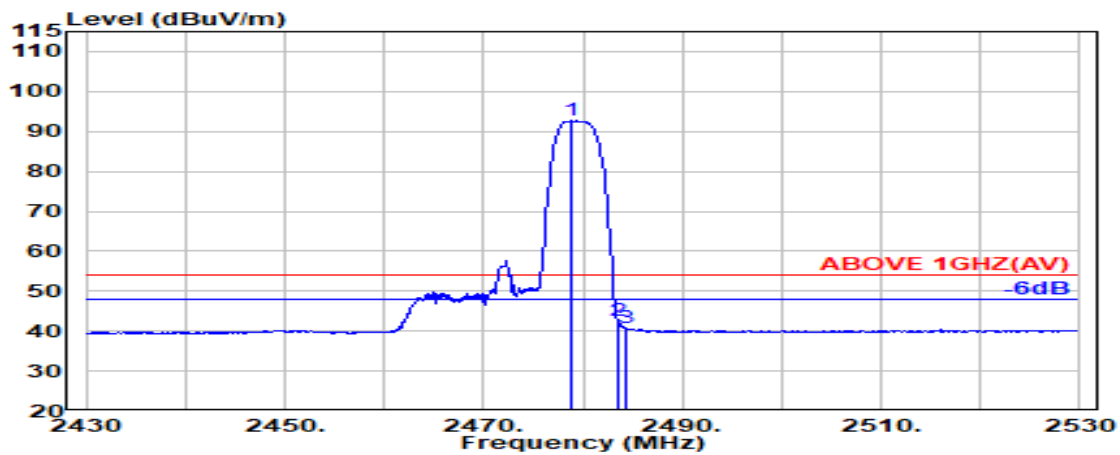


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.46	6.16	34.53	92.59	92.68	---	---	Average
2483.500	28.47	6.17	34.53	42.60	42.71	54.00	11.29	Average
2484.400	28.47	6.17	34.53	40.57	40.68	54.00	13.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

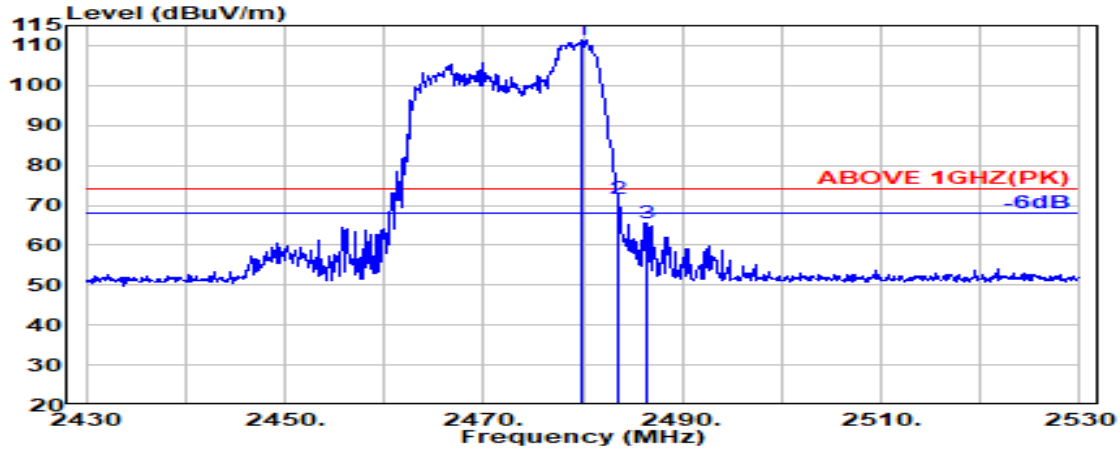

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.46	6.16	34.53	111.33	111.42	---	---	Peak
2483.500	28.47	6.17	34.53	71.44	71.55	74.00	2.45	Peak
2486.300	28.47	6.17	34.53	65.29	65.41	74.00	8.59	Peak

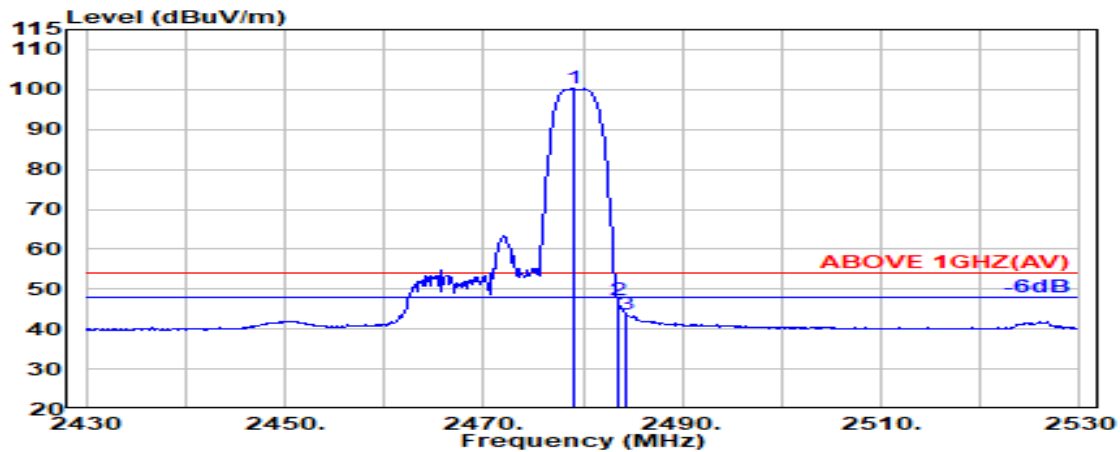


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.46	6.16	34.53	100.12	100.22	---	---	Average
2483.500	28.47	6.17	34.53	47.12	47.23	54.00	6.77	Average
2484.400	28.47	6.17	34.53	43.66	43.77	54.00	10.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

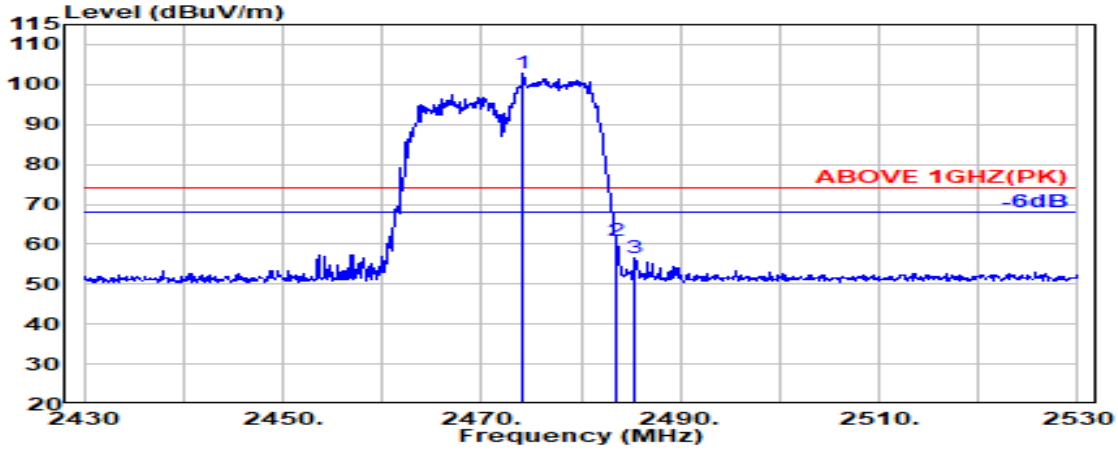

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.200	28.45	6.15	34.52	102.67	102.74	---	---	Peak
2483.500	28.47	6.17	34.53	60.93	61.03	74.00	12.97	Peak
2485.500	28.47	6.17	34.53	56.60	56.71	74.00	17.29	Peak

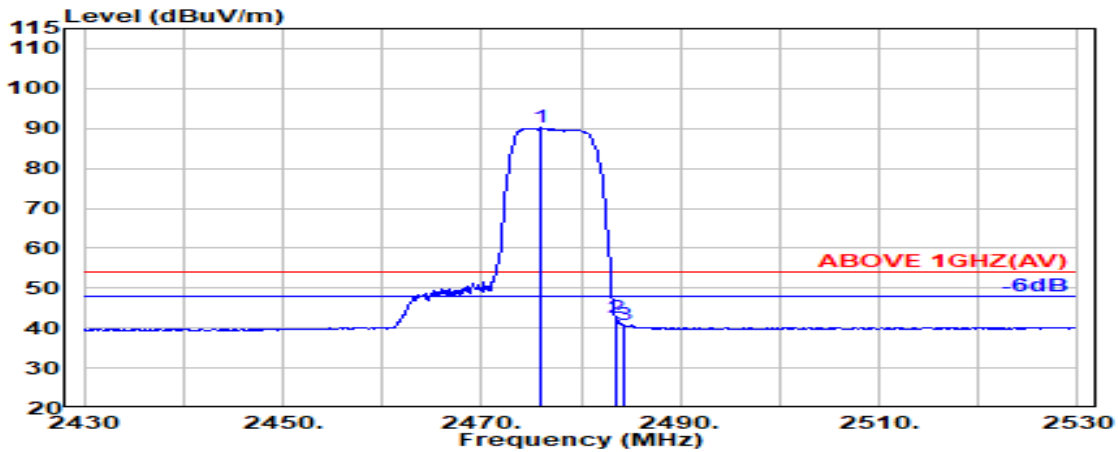


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	28.45	6.16	34.53	90.05	90.14	---	---	Average
2483.500	28.47	6.17	34.53	42.48	42.59	54.00	11.41	Average
2484.400	28.47	6.17	34.53	40.62	40.73	54.00	13.27	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

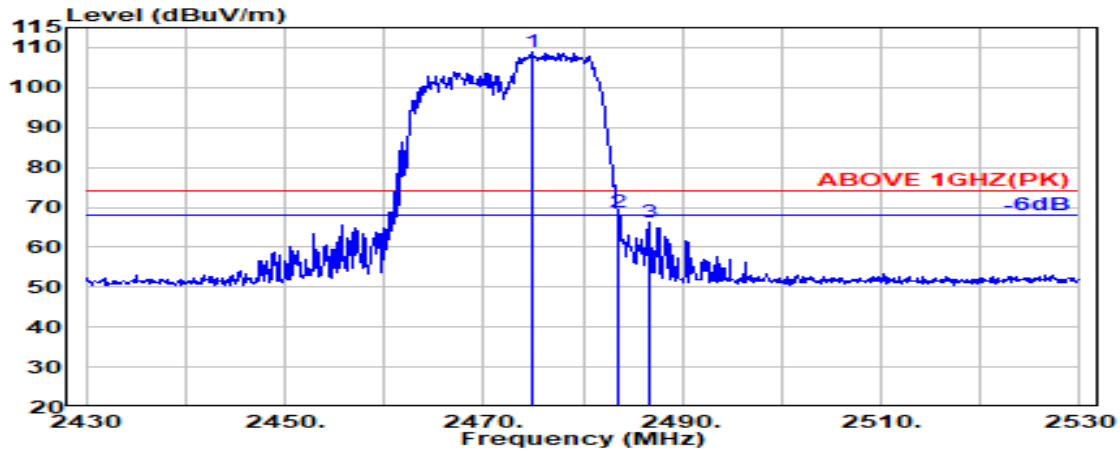

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.800	28.45	6.16	34.53	108.65	108.73	---	---	Peak
2483.500	28.47	6.17	34.53	68.65	68.76	74.00	5.24	Peak
2486.800	28.47	6.17	34.53	66.18	66.29	74.00	7.71	Peak

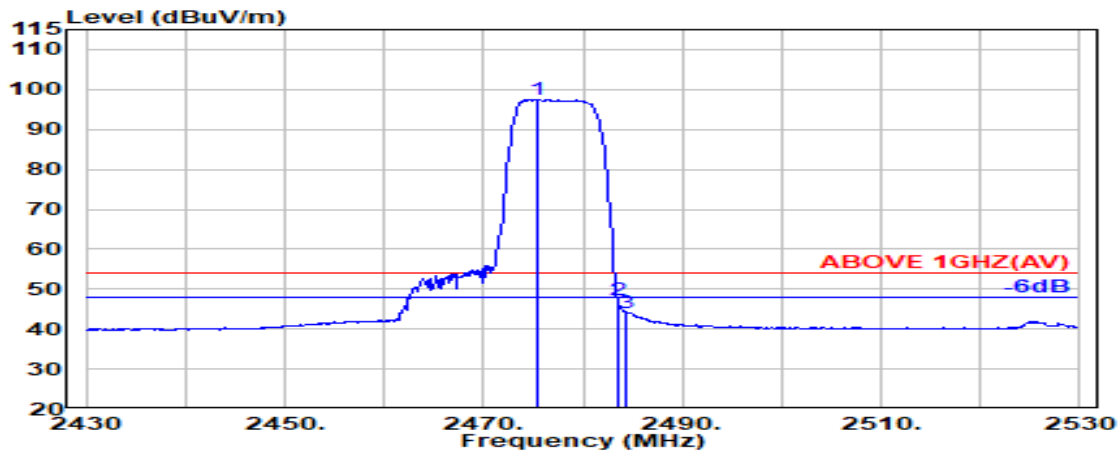


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.400	28.45	6.16	34.53	97.42	97.50	---	---	Average
2483.500	28.47	6.17	34.53	47.10	47.20	54.00	6.80	Average
2484.400	28.47	6.17	34.53	43.99	44.10	54.00	9.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

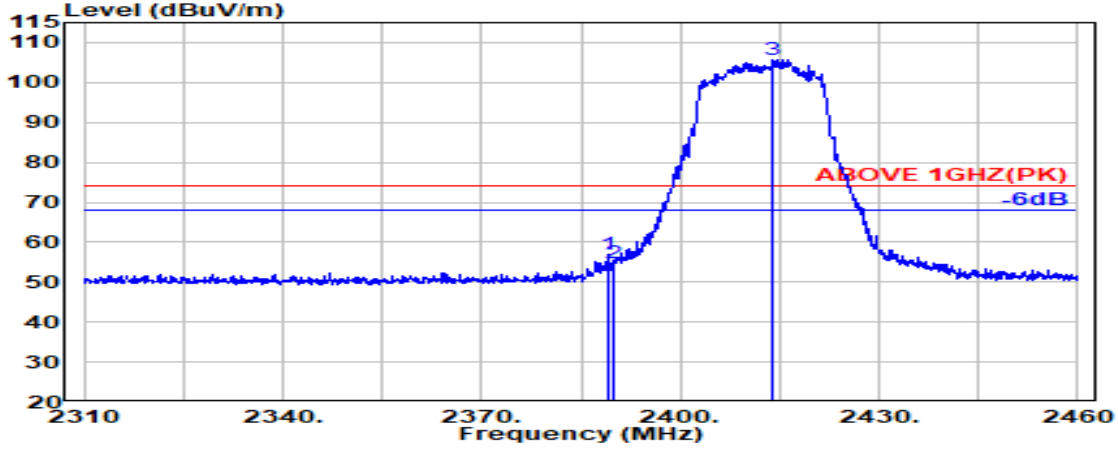

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.51	57.36	57.07	74.00	16.93	Peak
2390.000	28.18	6.03	34.51	55.20	54.91	74.00	19.09	Peak
@ 2413.900	28.18	6.07	34.51	106.06	105.80	---	---	Peak

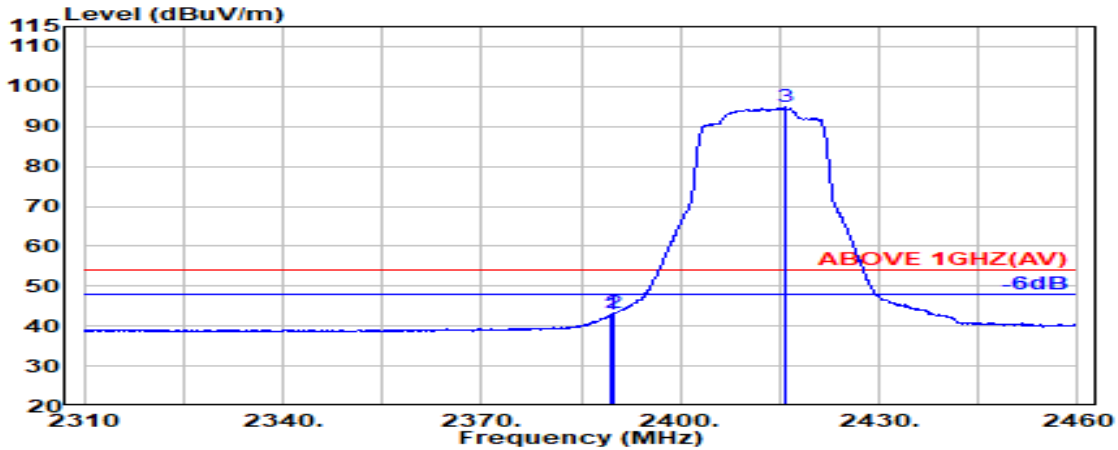


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.51	43.19	42.90	54.00	11.10	Average
2390.000	28.18	6.03	34.51	43.73	43.43	54.00	10.57	Average
@ 2415.900	28.20	6.07	34.51	95.03	94.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

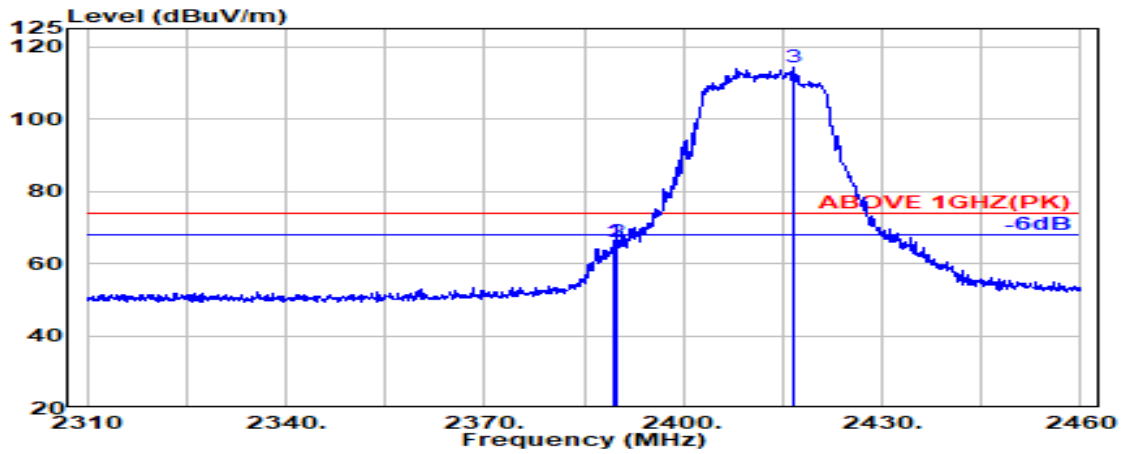

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	66.45	66.15	74.00	7.85	Peak
2390.000	28.18	6.03	34.51	66.29	66.00	74.00	8.00	Peak
@ 2416.700	28.20	6.07	34.51	114.44	114.20	---	---	Peak

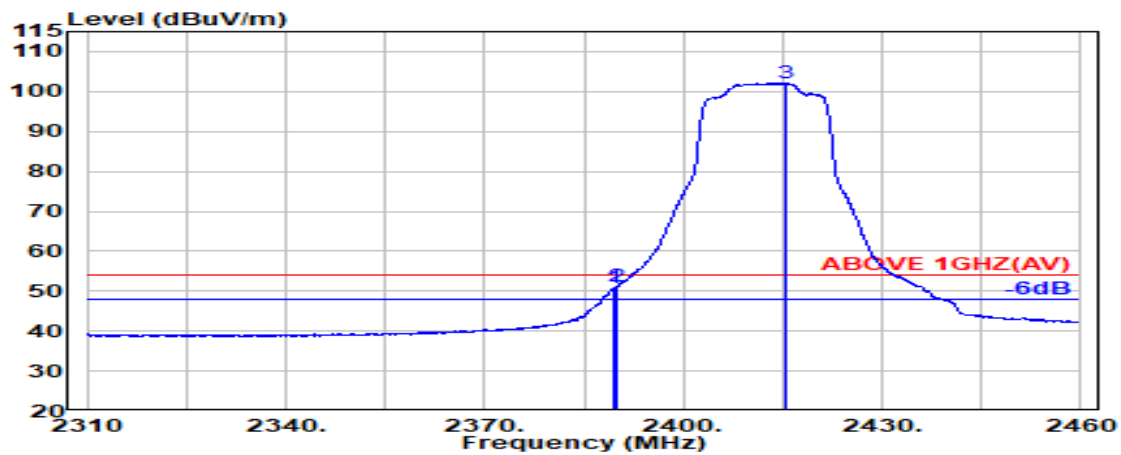


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	51.00	50.71	54.00	3.29	Average
2390.000	28.18	6.03	34.51	51.49	51.19	54.00	2.81	Average
@ 2415.300	28.19	6.07	34.51	102.36	102.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

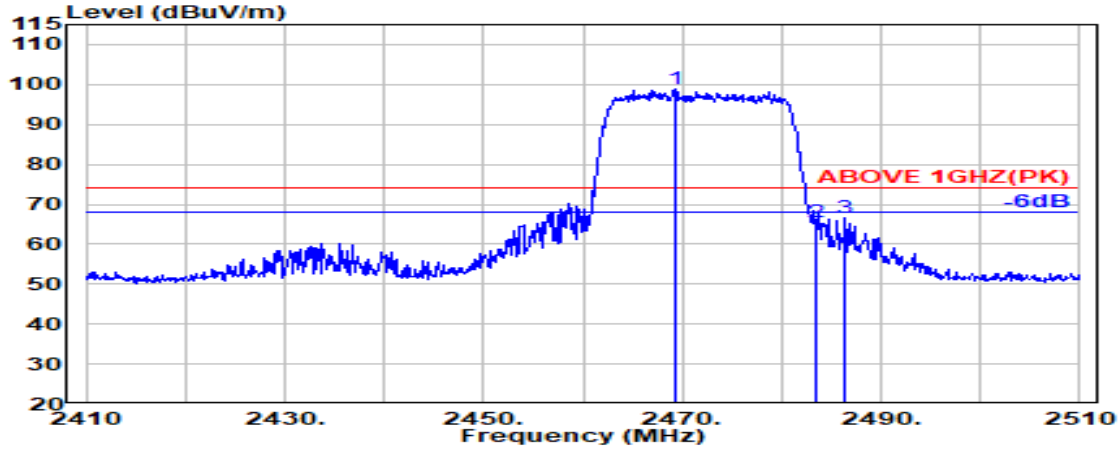

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.44	6.15	34.52	98.94	99.00	---	---	Peak
2483.500	28.47	6.17	34.53	65.44	65.55	74.00	8.45	Peak
2486.400	28.47	6.17	34.53	66.38	66.49	74.00	7.51	Peak

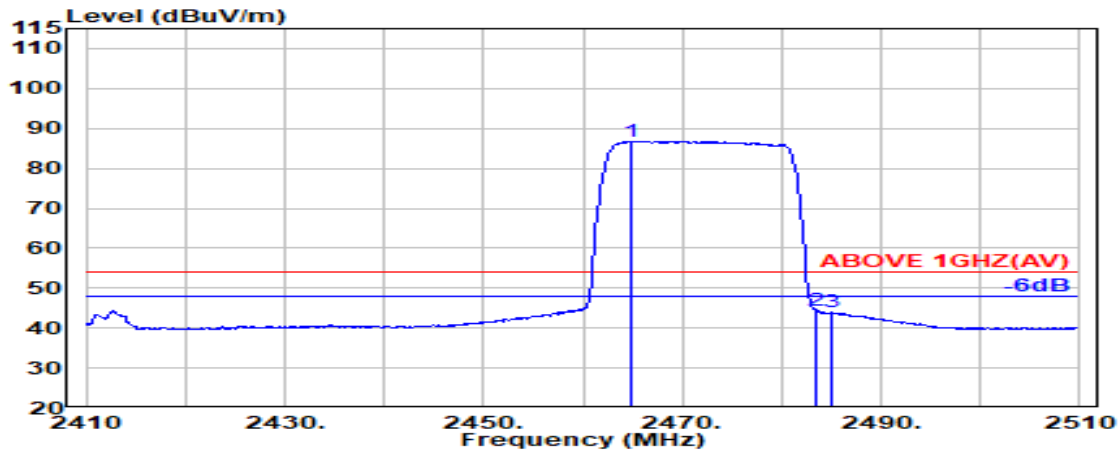


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.43	6.14	34.52	86.81	86.86	---	---	Average
2483.500	28.47	6.17	34.53	44.27	44.37	54.00	9.63	Average
2485.000	28.47	6.17	34.53	43.74	43.86	54.00	10.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

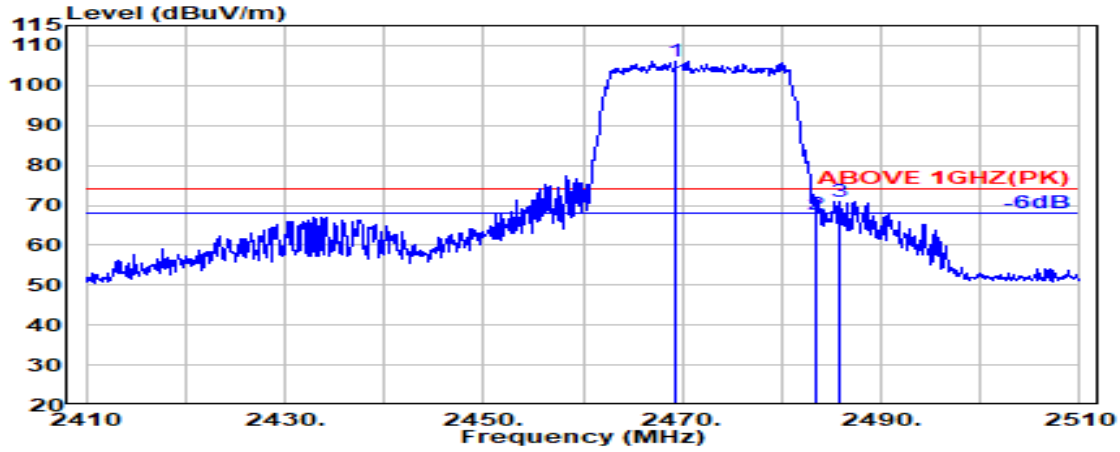

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.44	6.15	34.52	105.87	105.93	---	---	Peak
2483.500	28.47	6.17	34.53	67.72	67.83	74.00	6.17	Peak
2485.900	28.47	6.17	34.53	70.94	71.05	74.00	2.95	Peak

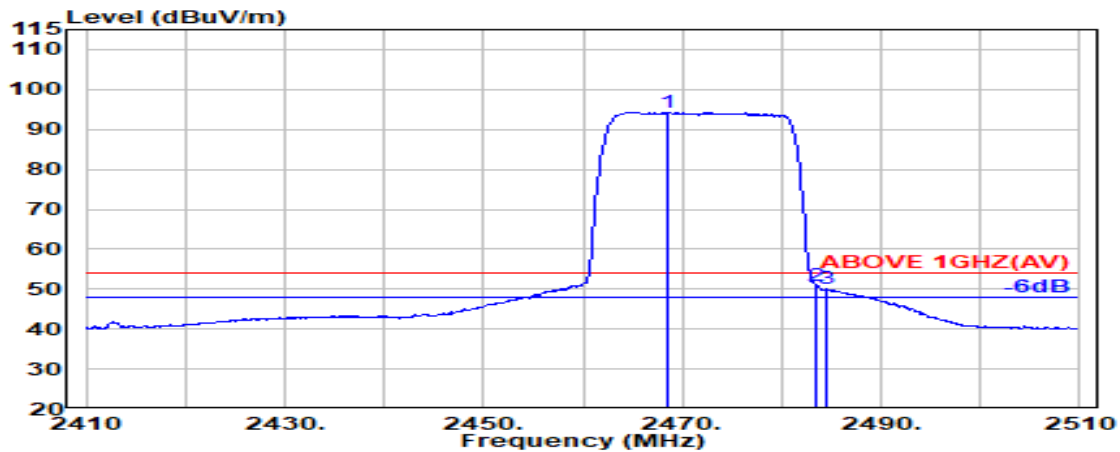


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.600	28.44	6.15	34.52	94.25	94.31	---	---	Average
2483.500	28.47	6.17	34.53	50.61	50.72	54.00	3.28	Average
2484.600	28.47	6.17	34.53	49.83	49.94	54.00	4.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

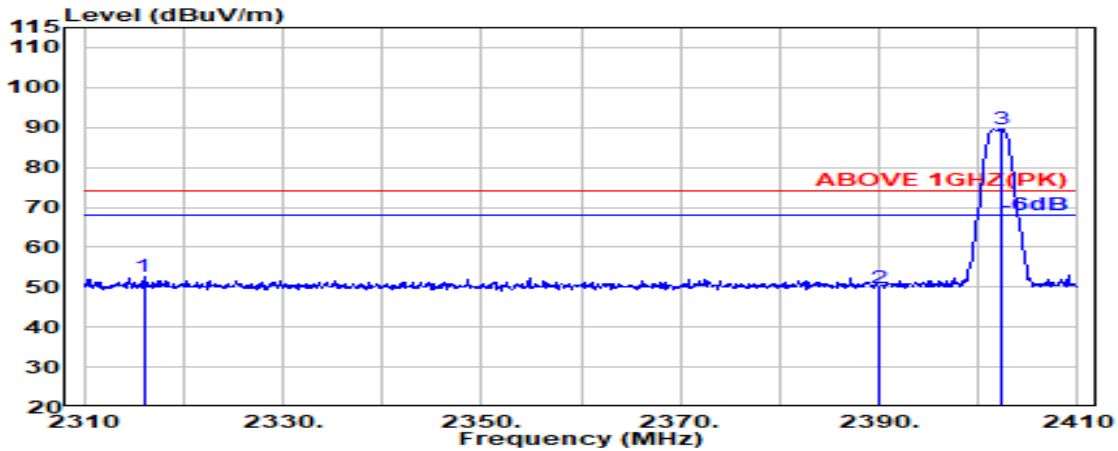

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2316.000	28.23	5.93	34.49	53.01	52.68	74.00	21.32	Peak
2390.000	28.18	6.03	34.51	50.17	49.87	74.00	24.13	Peak
@ 2402.400	28.11	6.05	34.51	89.98	89.64	---	---	Peak

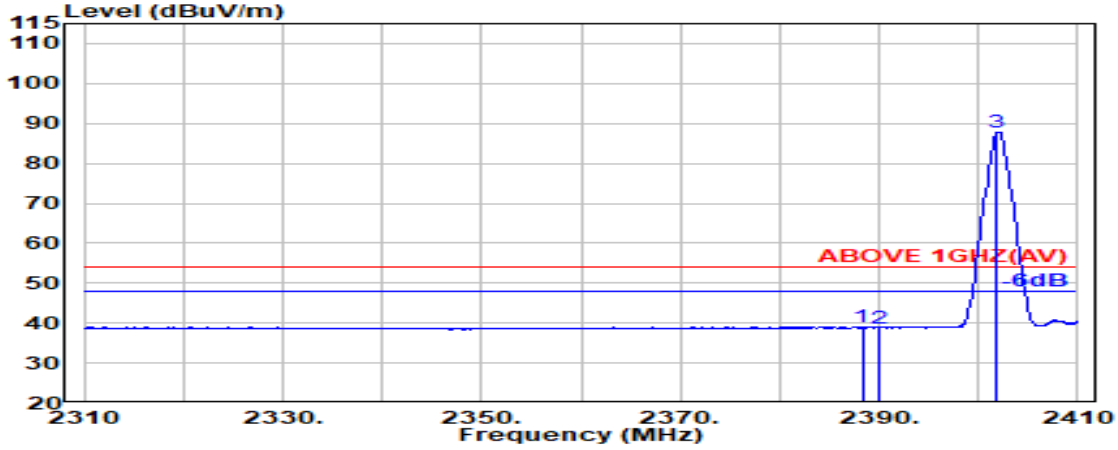


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.19	6.03	34.51	39.37	39.09	54.00	14.91	Average
2390.000	28.18	6.03	34.51	39.09	38.79	54.00	15.21	Average
@ 2401.900	28.11	6.05	34.51	88.16	87.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

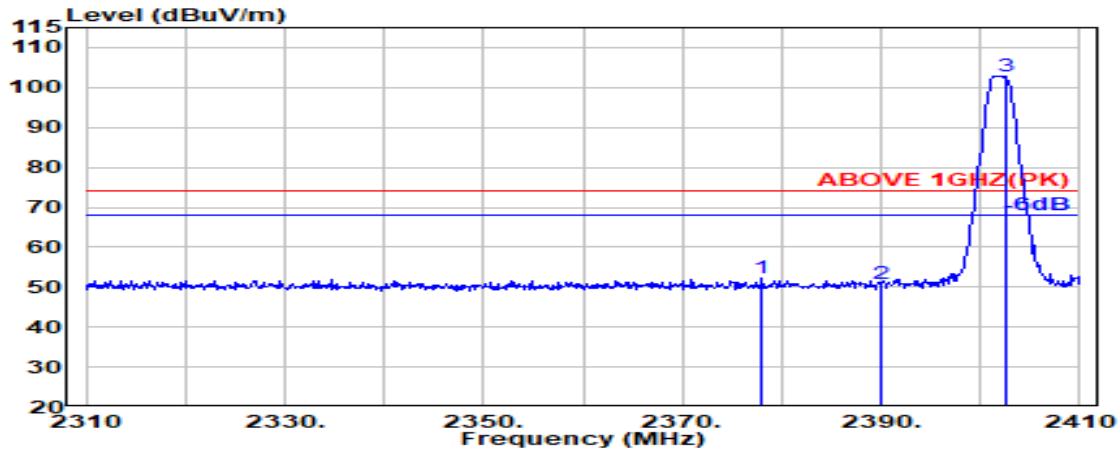

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.000	28.27	6.02	34.51	52.41	52.20	74.00	21.80	Peak
2390.000	28.18	6.03	34.51	51.27	50.98	74.00	23.02	Peak
@ 2402.500	28.12	6.05	34.51	103.27	102.93	---	---	Peak

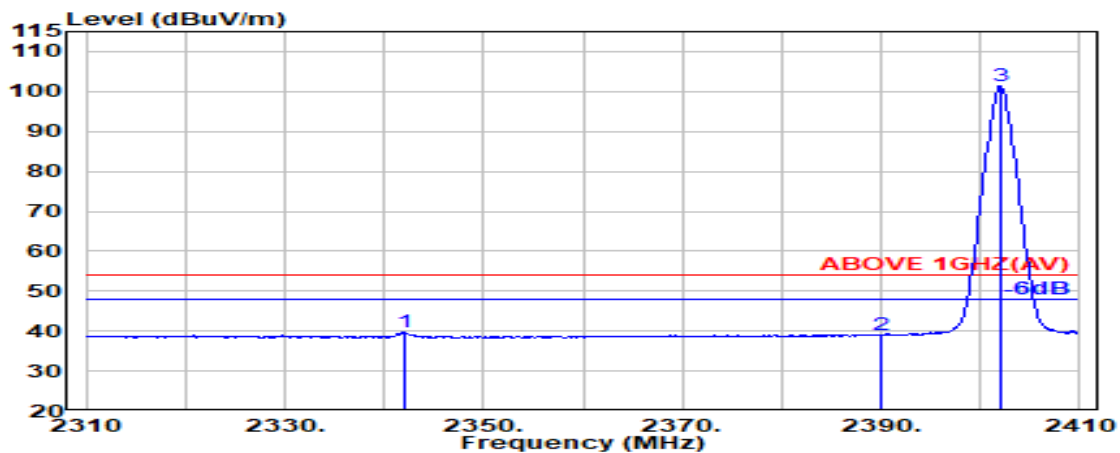


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	28.44	5.96	34.50	39.92	39.83	54.00	14.17	Average
2390.000	28.18	6.03	34.51	39.24	38.95	54.00	15.05	Average
@ 2402.000	28.11	6.05	34.51	101.67	101.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

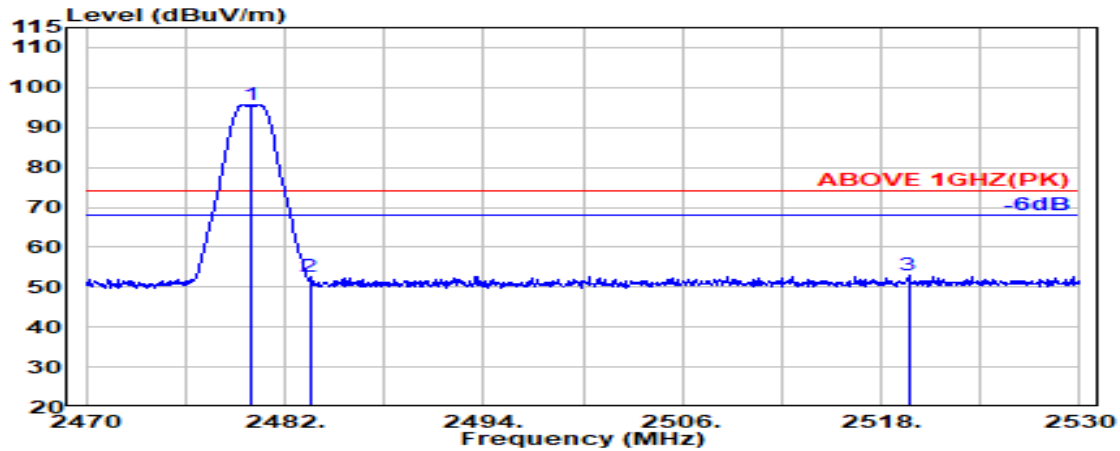

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.46	6.16	34.53	95.65	95.75	---	---	Peak
2483.500	28.47	6.17	34.53	52.43	52.53	74.00	21.47	Peak
2519.650	28.62	6.21	34.53	52.66	52.96	74.00	21.04	Peak

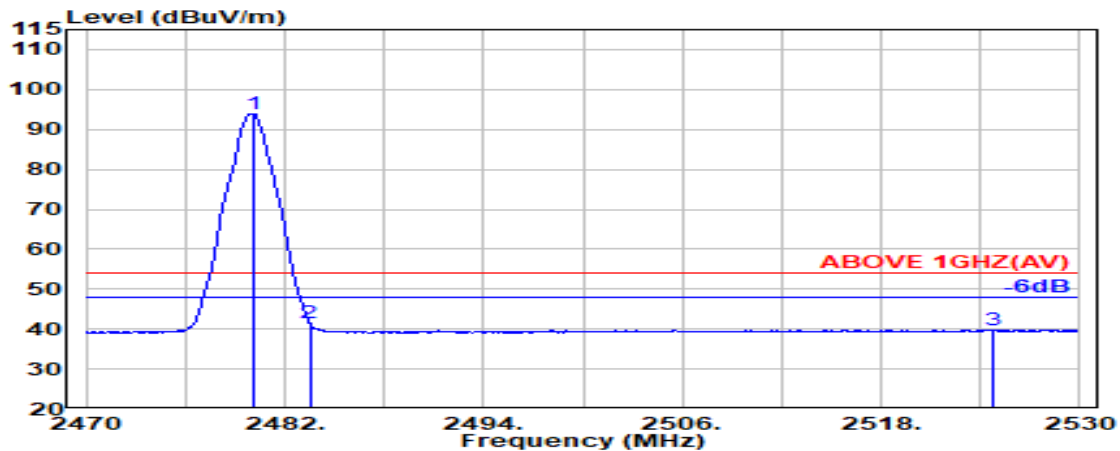


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.53	93.91	94.00	---	---	Average
2483.500	28.47	6.17	34.53	41.27	41.38	54.00	12.62	Average
2524.750	28.65	6.22	34.54	39.50	39.83	54.00	14.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

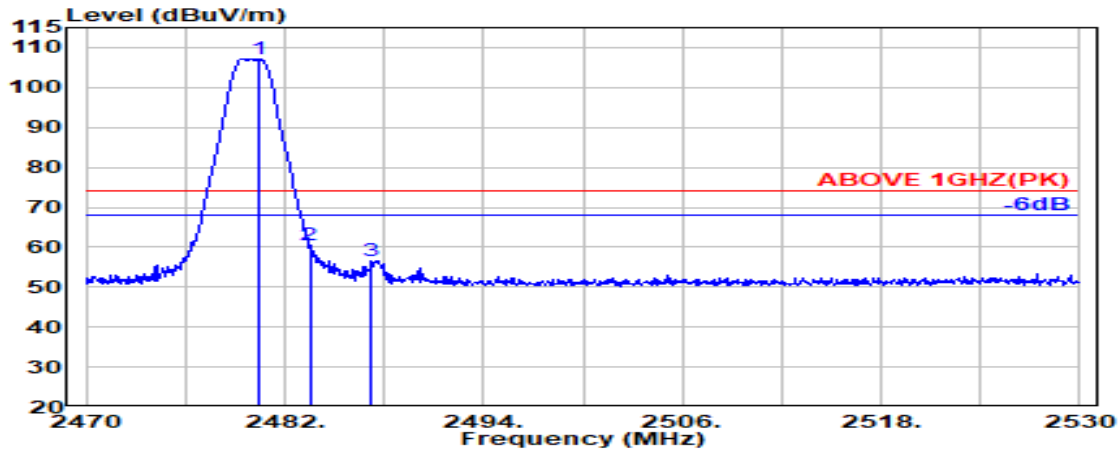

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.46	6.16	34.53	107.16	107.25	---	---	Peak
2483.500	28.47	6.17	34.53	60.44	60.55	74.00	13.45	Peak
2487.250	28.47	6.17	34.53	56.42	56.54	74.00	17.46	Peak

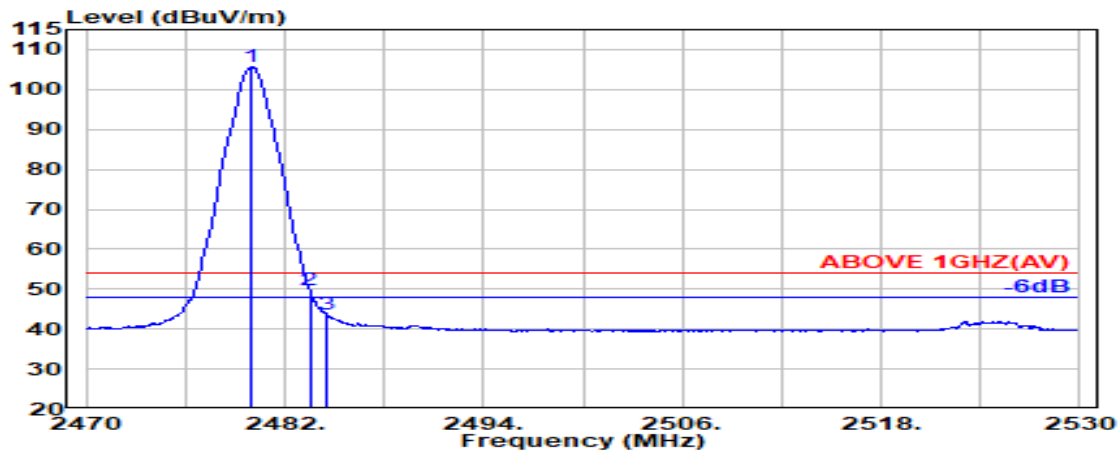


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.46	6.16	34.53	105.45	105.55	---	---	Average
2483.500	28.47	6.17	34.53	49.54	49.65	54.00	4.35	Average
2484.500	28.47	6.17	34.53	43.63	43.74	54.00	10.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

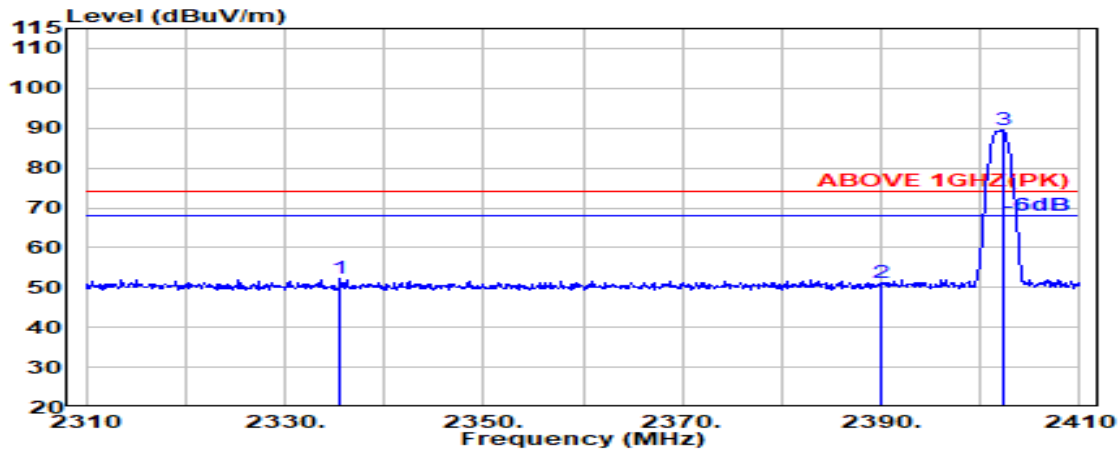

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2335.600	28.39	5.96	34.50	52.50	52.35	74.00	21.65	Peak
2390.000	28.18	6.03	34.51	51.56	51.27	74.00	22.73	Peak
@ 2402.200	28.11	6.05	34.51	89.77	89.43	---	---	Peak

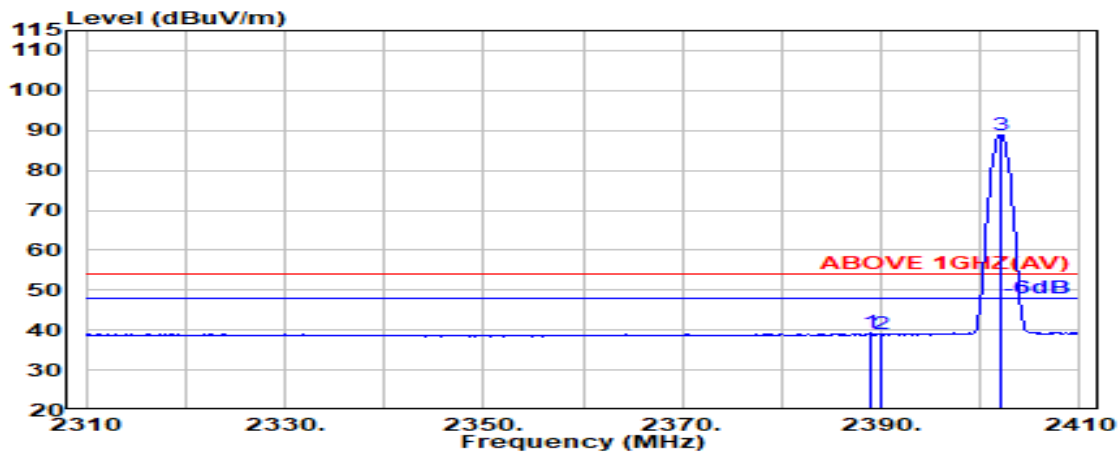


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.51	39.54	39.25	54.00	14.75	Average
2390.000	28.18	6.03	34.51	39.13	38.84	54.00	15.16	Average
@ 2402.100	28.11	6.05	34.51	89.24	88.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

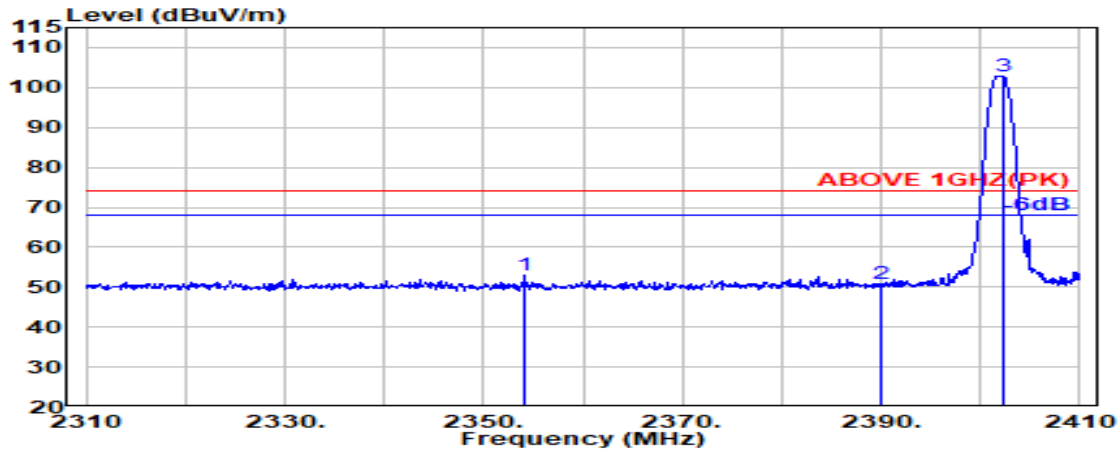

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.200	28.47	5.98	34.50	53.11	53.06	74.00	20.94	Peak
2390.000	28.18	6.03	34.51	51.18	50.89	74.00	23.11	Peak
@ 2402.200	28.11	6.05	34.51	103.28	102.94	---	---	Peak

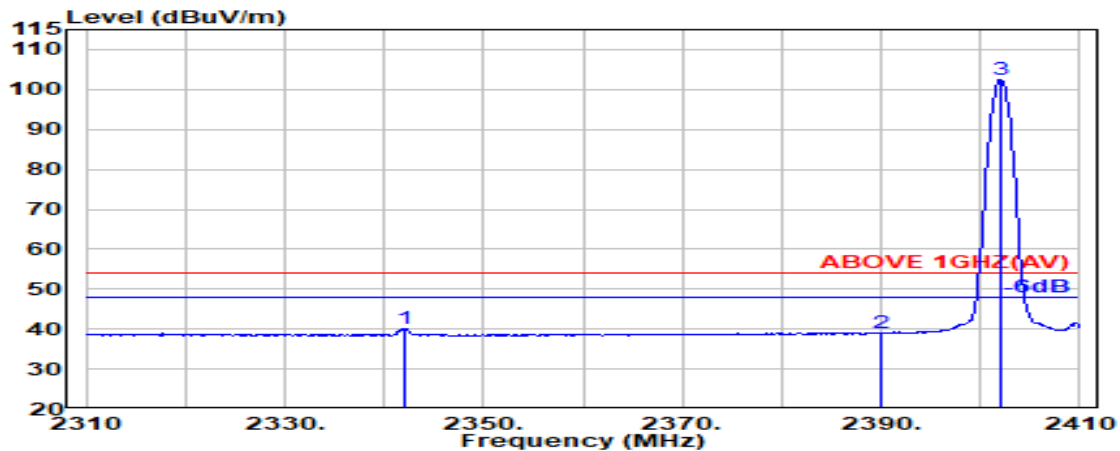


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	28.44	5.96	34.50	40.18	40.08	54.00	13.92	Average
2390.000	28.18	6.03	34.51	39.21	38.92	54.00	15.08	Average
@ 2402.000	28.11	6.05	34.51	102.80	102.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (PHY Coded S8)	Frequency	TX 2480MHz
------	--------------------	-----------	------------

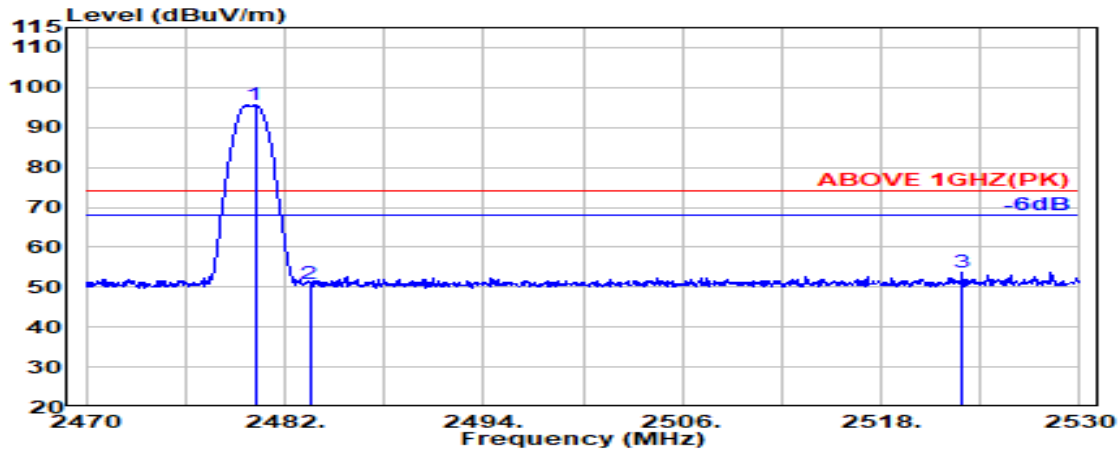

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	34.53	95.40	95.49	---	---	Peak
2483.500	28.47	6.17	34.53	50.90	51.00	74.00	23.00	Peak
2522.850	28.64	6.22	34.54	53.46	53.78	74.00	20.22	Peak

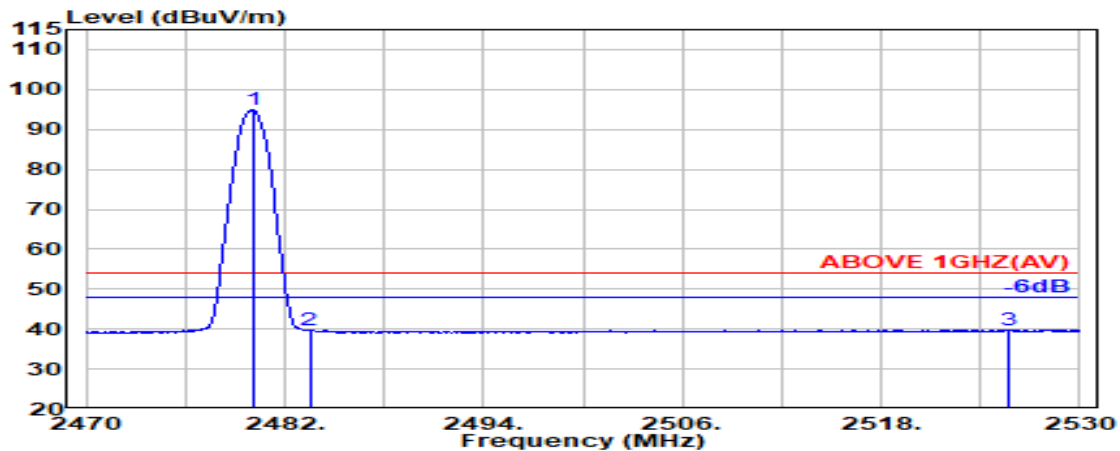


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.53	94.73	94.83	---	---	Average
2483.500	28.47	6.17	34.53	39.46	39.57	54.00	14.43	Average
2525.700	28.65	6.22	34.54	39.39	39.72	54.00	14.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (PHY Coded S8)	Frequency	TX 2480MHz
------	--------------------	-----------	------------

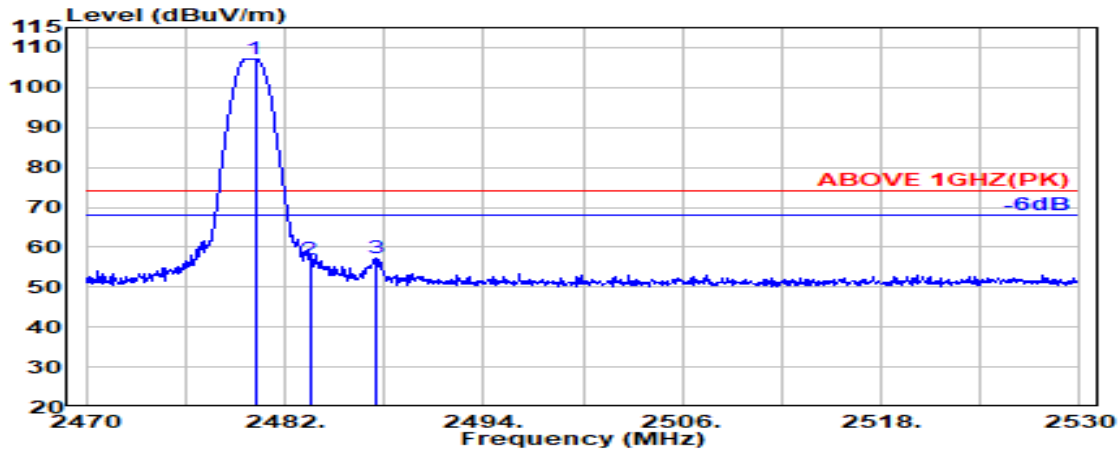

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	34.53	107.15	107.25	---	---	Peak
2483.500	28.47	6.17	34.53	56.78	56.89	74.00	17.11	Peak
2487.450	28.48	6.17	34.53	57.04	57.16	74.00	16.84	Peak

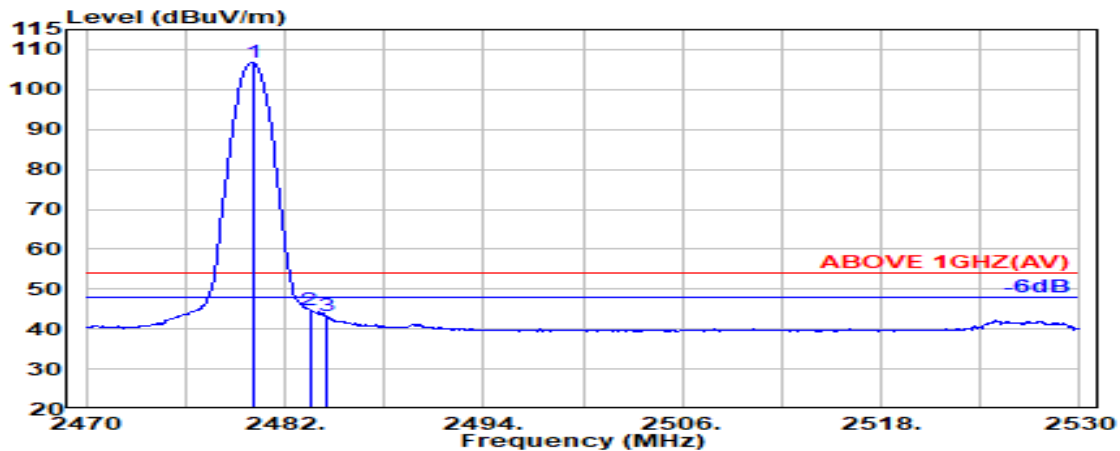


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.53	106.71	106.80	---	---	Average
2483.500	28.47	6.17	34.53	44.48	44.59	54.00	9.41	Average
2484.500	28.47	6.17	34.53	43.22	43.33	54.00	10.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

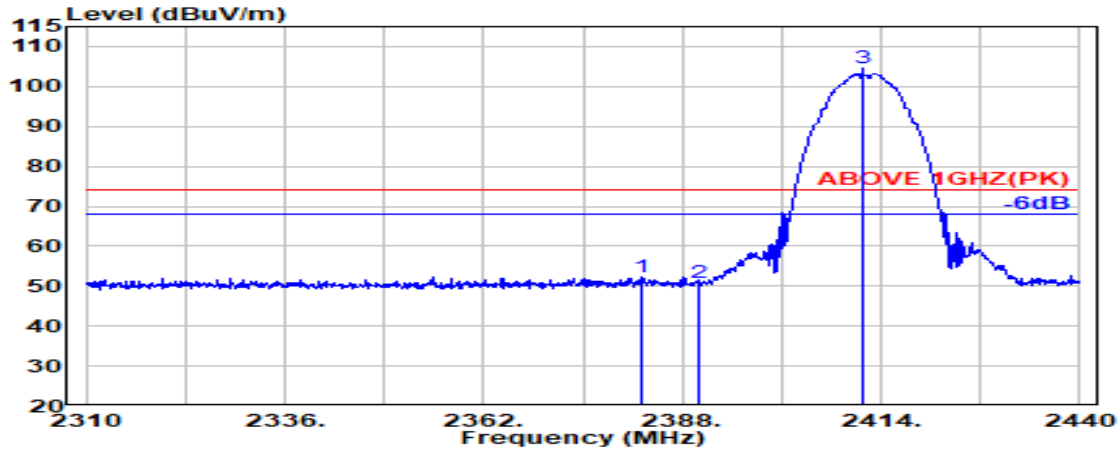

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.600	28.24	6.02	34.51	52.58	52.33	74.00	21.67	Peak
2390.000	28.18	6.03	34.51	51.18	50.88	74.00	23.12	Peak
@ 2411.500	28.17	6.07	34.51	104.97	104.69	---	---	Peak

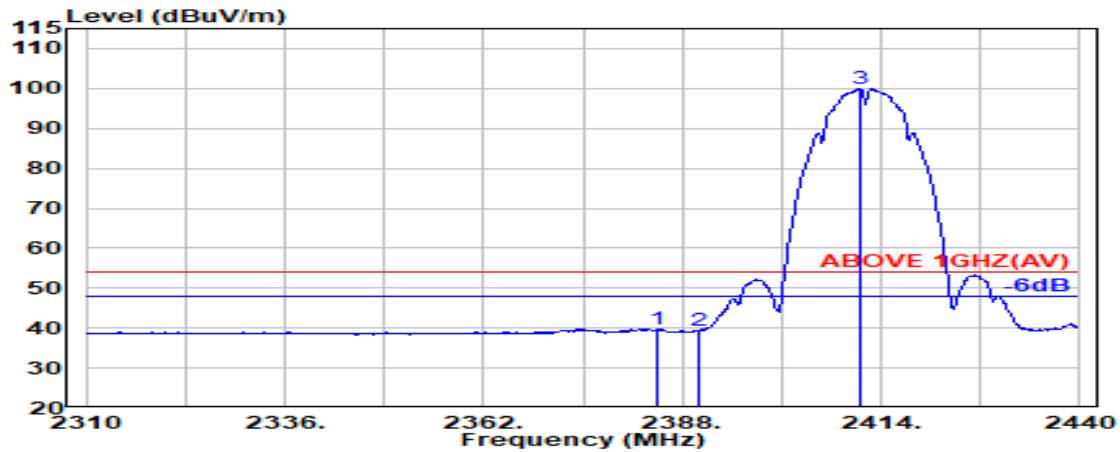


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.800	28.22	6.03	34.51	40.02	39.76	54.00	14.24	Average
2390.000	28.18	6.03	34.51	39.54	39.25	54.00	14.75	Average
@ 2411.200	28.17	6.07	34.51	100.37	100.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

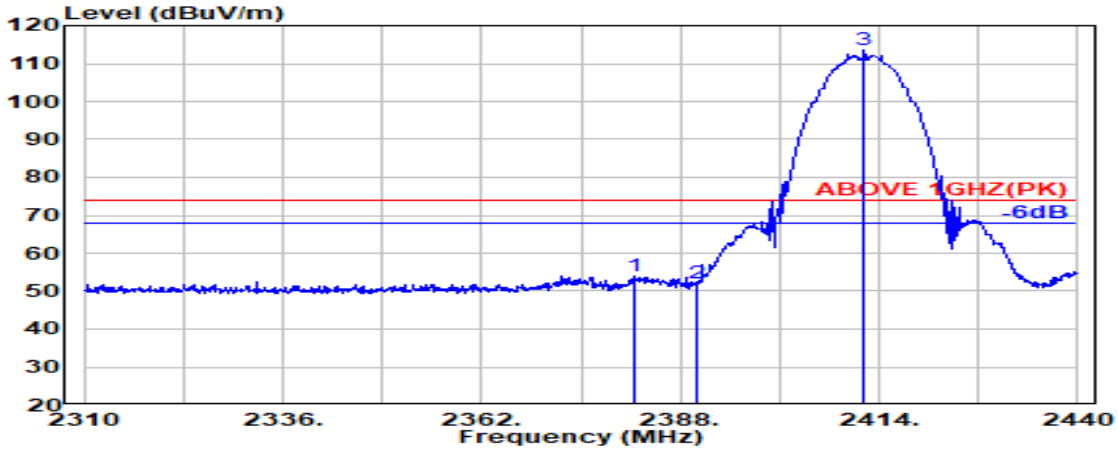

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.100	28.24	6.02	34.51	54.13	53.89	74.00	20.11	Peak
2390.000	28.18	6.03	34.51	52.51	52.21	74.00	21.79	Peak
@ 2412.100	28.17	6.07	34.51	113.94	113.66	---	---	Peak

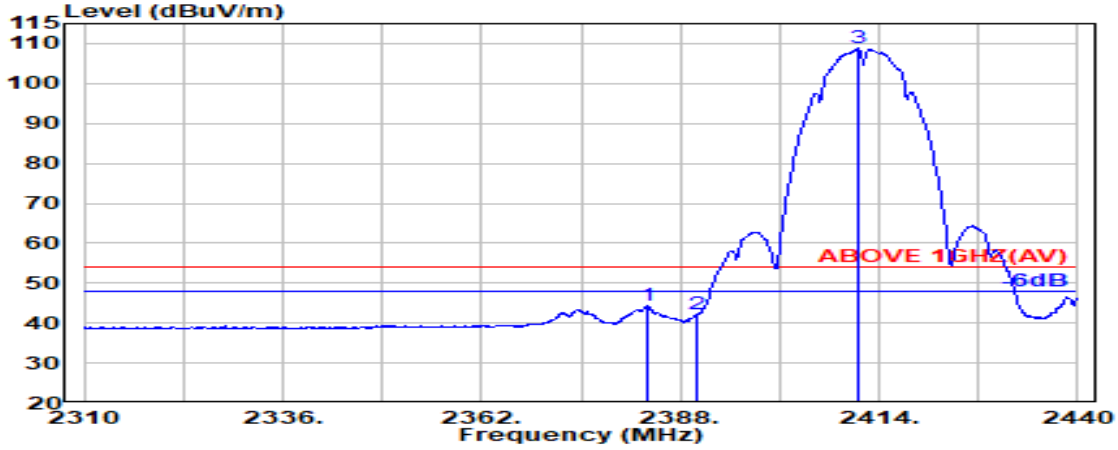


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.700	28.23	6.03	34.51	44.77	44.52	54.00	9.48	Average
2390.000	28.18	6.03	34.51	42.40	42.11	54.00	11.89	Average
@ 2411.200	28.17	6.07	34.51	109.03	108.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

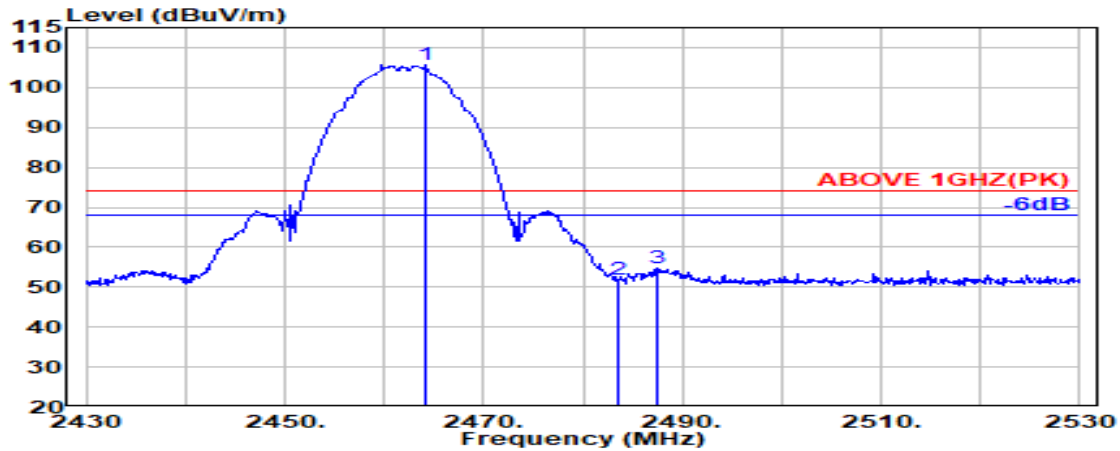

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.43	6.14	34.52	105.77	105.81	---	---	Peak
2483.500	28.47	6.17	34.53	51.83	51.94	74.00	22.06	Peak
2487.400	28.47	6.17	34.53	54.80	54.92	74.00	19.08	Peak

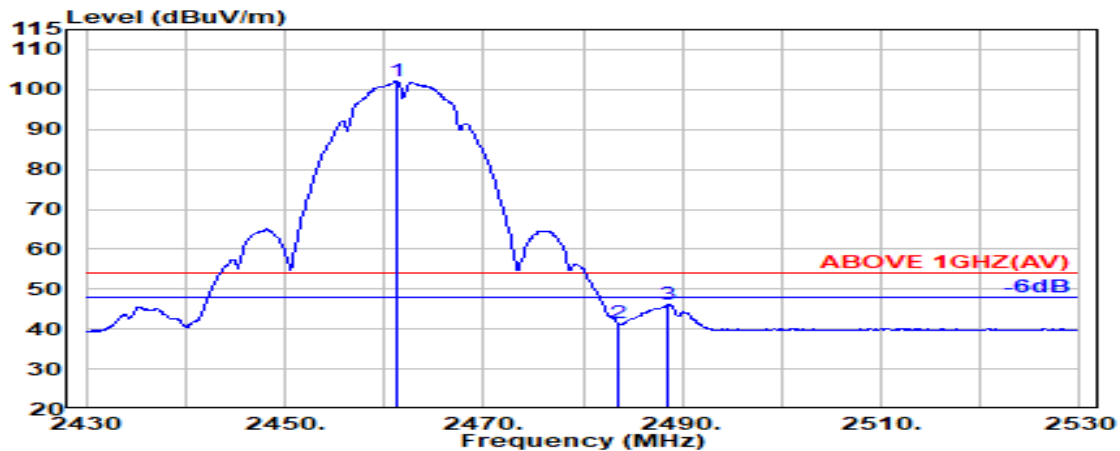


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.42	6.14	34.52	102.00	102.03	---	---	Average
2483.500	28.47	6.17	34.53	41.40	41.51	54.00	12.49	Average
2488.600	28.48	6.17	34.53	45.92	46.04	54.00	7.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

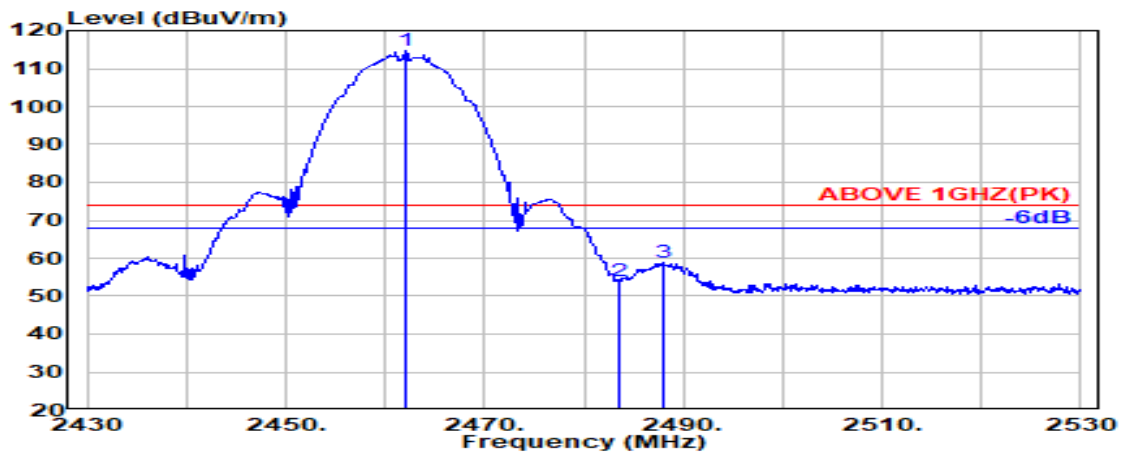

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.42	6.14	34.52	114.73	114.77	---	---	Peak
2483.500	28.47	6.17	34.53	53.68	53.79	74.00	20.21	Peak
2488.000	28.48	6.17	34.53	58.75	58.87	74.00	15.13	Peak

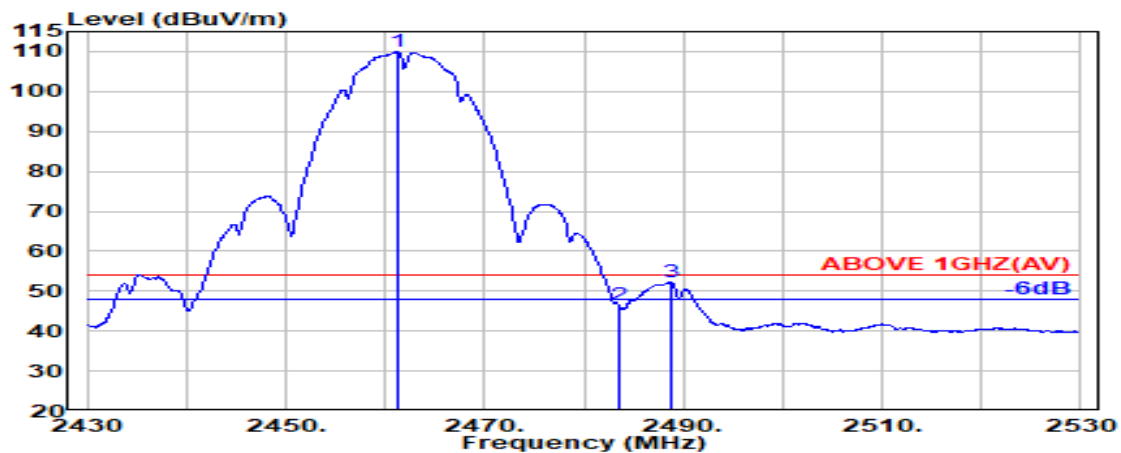


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.42	6.14	34.52	110.07	110.10	---	---	Average
2483.500	28.47	6.17	34.53	46.59	46.70	54.00	7.30	Average
2488.700	28.48	6.17	34.53	52.30	52.43	54.00	1.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

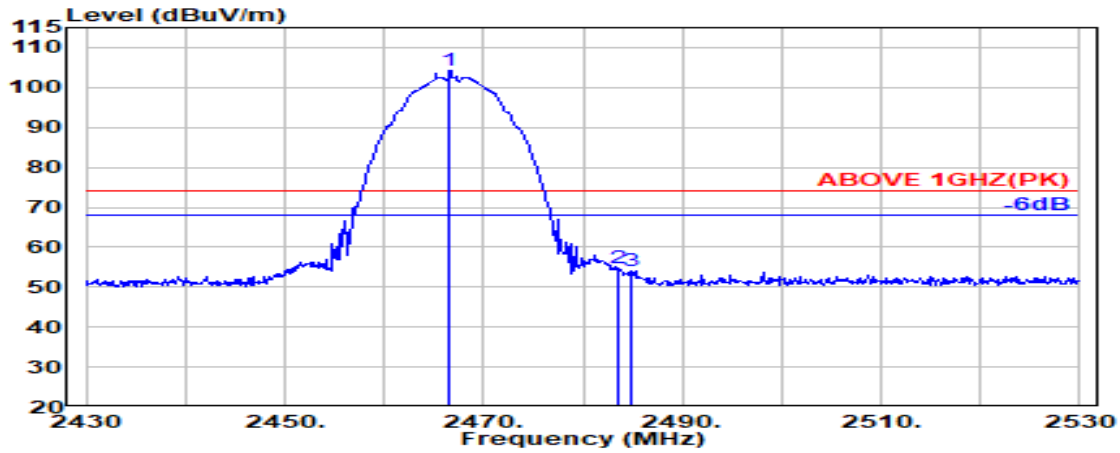

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.600	28.43	6.14	34.52	104.18	104.24	---	---	Peak
2483.500	28.47	6.17	34.53	54.56	54.67	74.00	19.33	Peak
2484.900	28.47	6.17	34.53	54.06	54.17	74.00	19.83	Peak

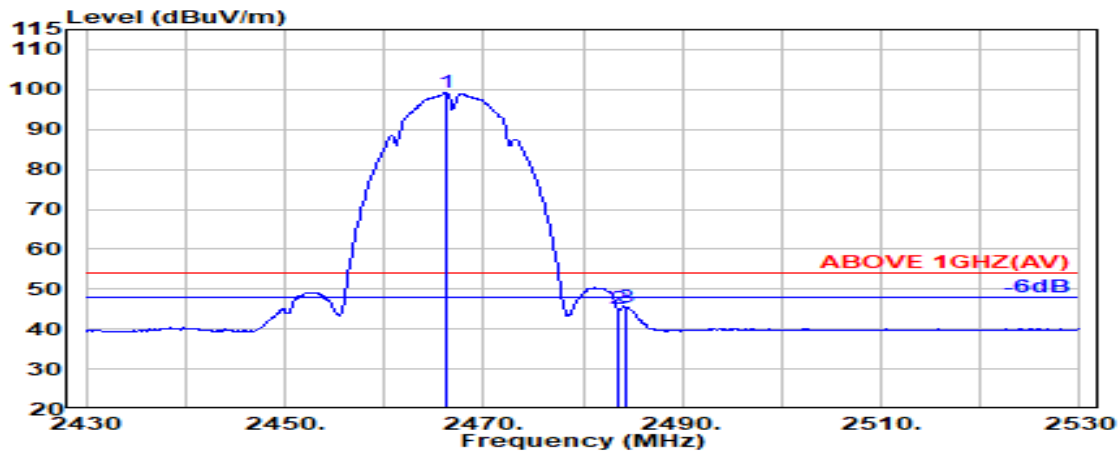


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	6.14	34.52	99.11	99.16	---	---	Average
2483.500	28.47	6.17	34.53	44.84	44.95	54.00	9.05	Average
2484.400	28.47	6.17	34.53	45.38	45.49	54.00	8.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

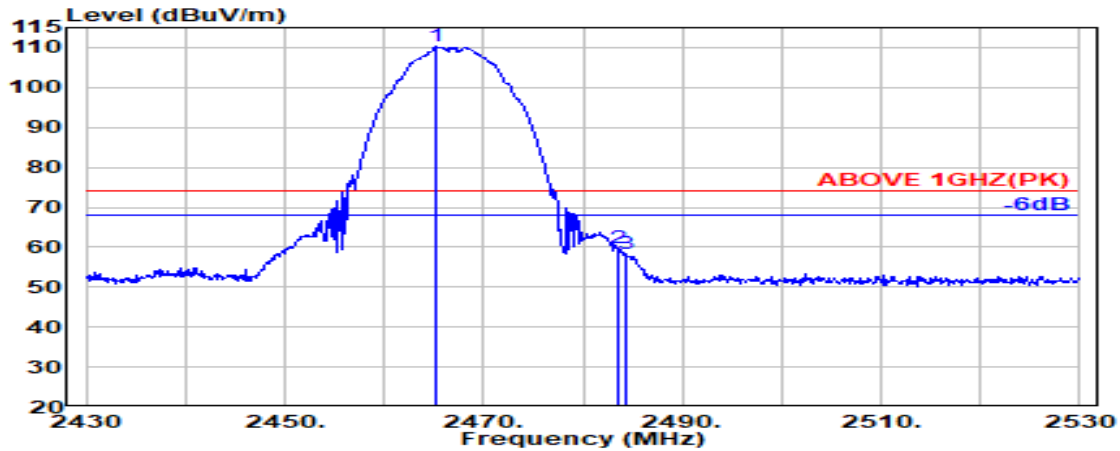

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.43	6.14	34.52	110.13	110.17	---	---	Peak
2483.500	28.47	6.17	34.53	59.81	59.91	74.00	14.09	Peak
2484.400	28.47	6.17	34.53	58.39	58.50	74.00	15.50	Peak

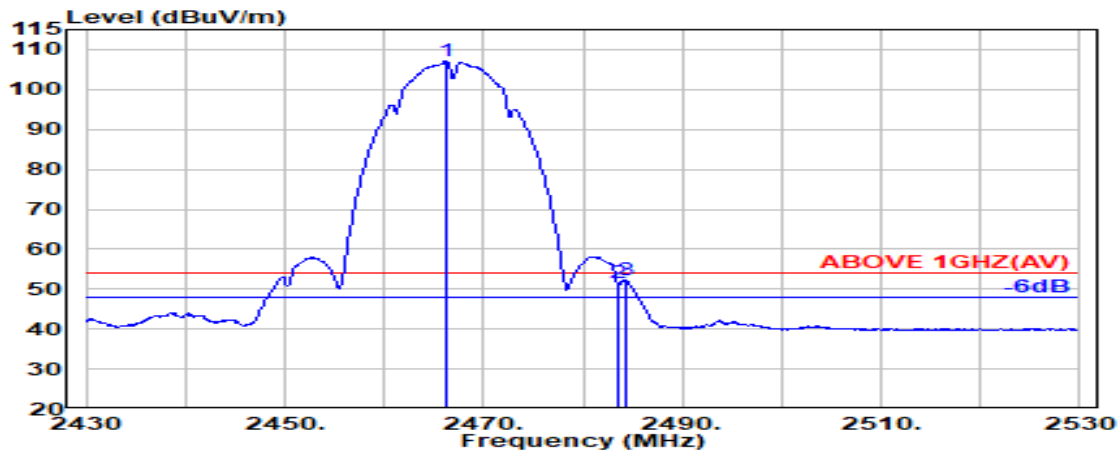


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	6.14	34.52	106.93	106.99	---	---	Average
2483.500	28.47	6.17	34.53	51.41	51.52	54.00	2.48	Average
2484.400	28.47	6.17	34.53	52.08	52.19	54.00	1.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

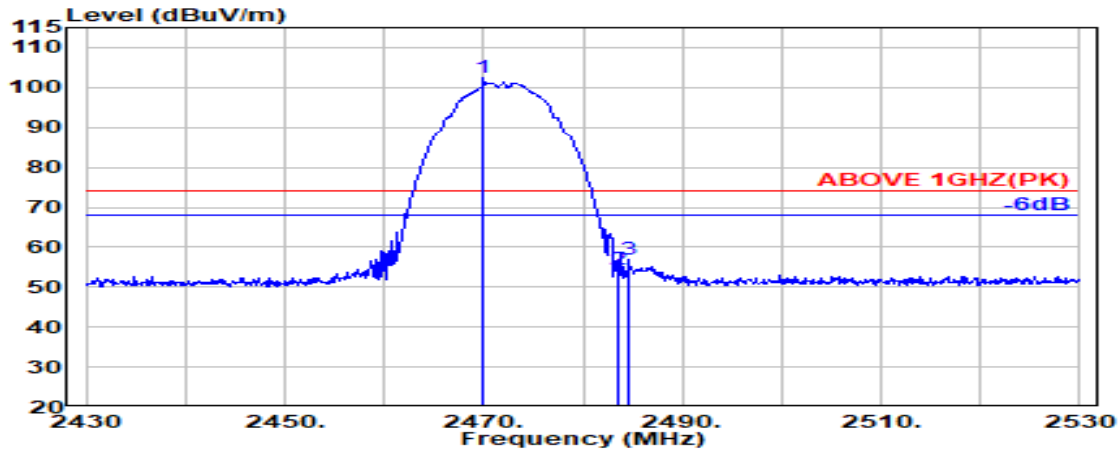

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	28.44	6.15	34.52	102.46	102.53	---	---	Peak
2483.500	28.47	6.17	34.53	54.20	54.31	74.00	19.69	Peak
2484.600	28.47	6.17	34.53	56.77	56.88	74.00	17.12	Peak

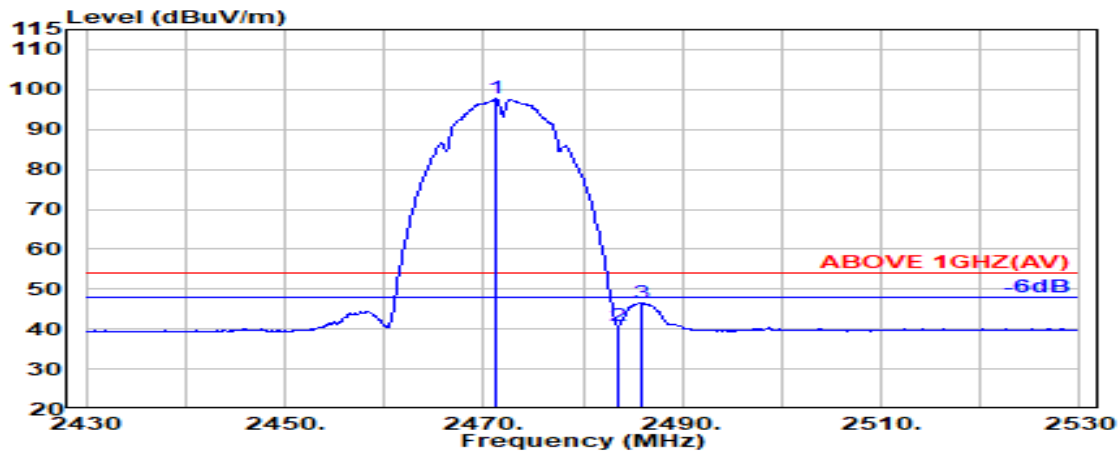


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.44	6.15	34.52	97.55	97.62	---	---	Average
2483.500	28.47	6.17	34.53	40.82	40.93	54.00	13.07	Average
2485.800	28.47	6.17	34.53	46.34	46.45	54.00	7.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

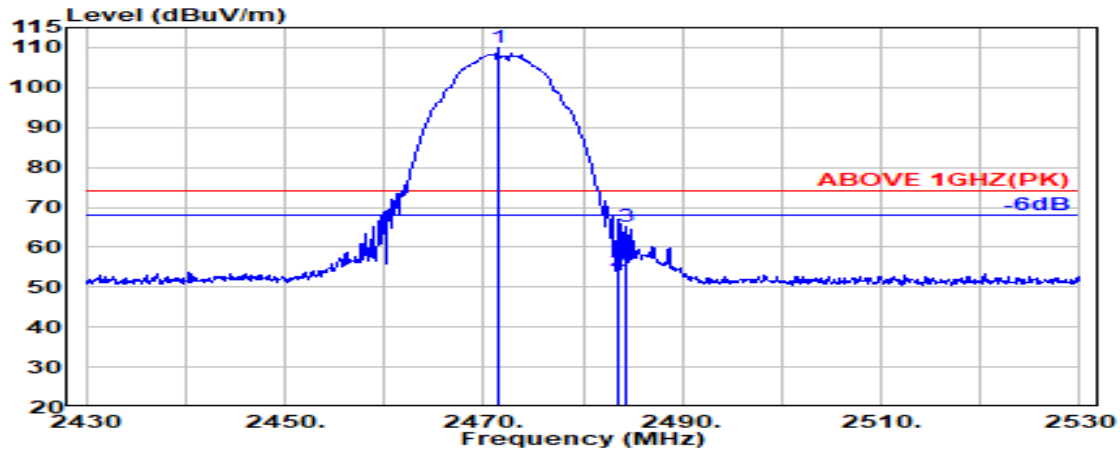

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.400	28.44	6.15	34.52	109.77	109.84	---	---	Peak
2483.500	28.47	6.17	34.53	54.08	54.18	74.00	19.82	Peak
2484.400	28.47	6.17	34.53	64.89	65.00	74.00	9.00	Peak

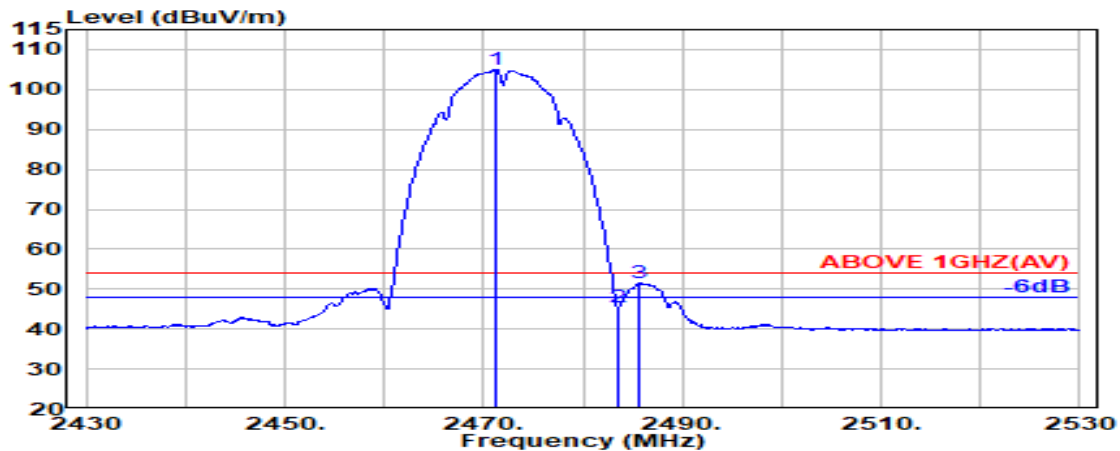


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	6.15	34.52	104.97	105.04	---	---	Average
2483.500	28.47	6.17	34.53	45.36	45.47	54.00	8.53	Average
2485.700	28.47	6.17	34.53	51.37	51.48	54.00	2.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

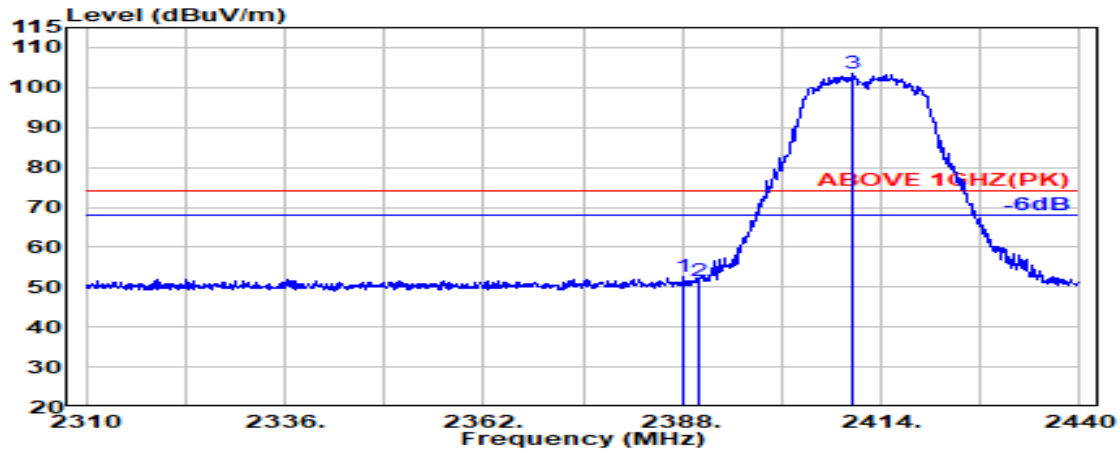

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	28.19	6.03	34.51	52.88	52.60	74.00	21.40	Peak
2390.000	28.18	6.03	34.51	51.75	51.46	74.00	22.54	Peak
@ 2410.400	28.16	6.06	34.51	103.76	103.48	---	---	Peak

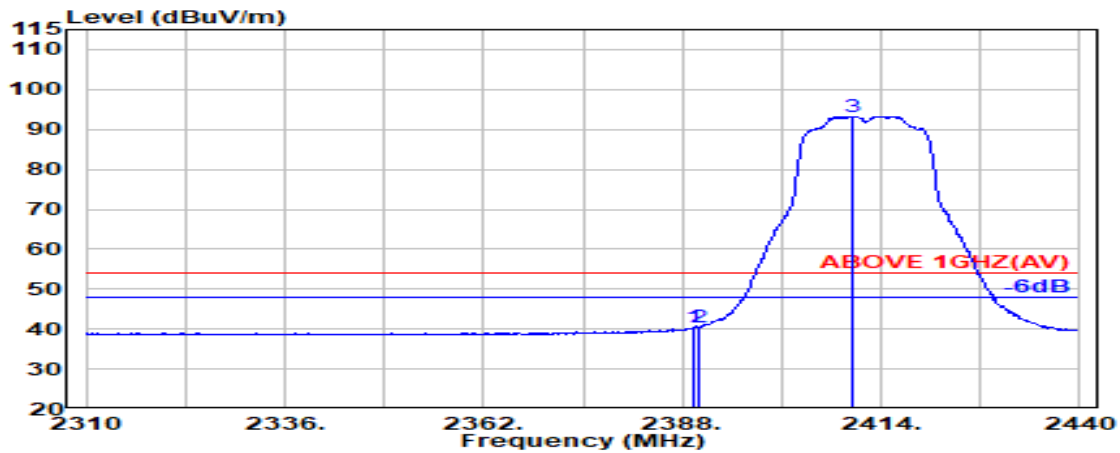


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	40.62	40.33	54.00	13.67	Average
2390.000	28.18	6.03	34.51	40.79	40.50	54.00	13.50	Average
@ 2410.400	28.16	6.06	34.51	93.58	93.30	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

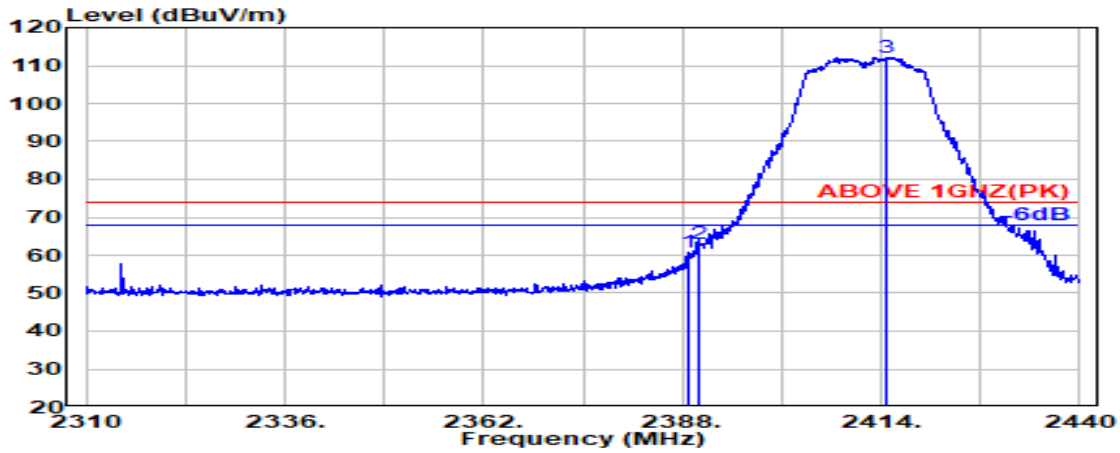

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.51	61.09	60.81	74.00	13.19	Peak
2390.000	28.18	6.03	34.51	63.17	62.87	74.00	11.13	Peak
@ 2414.800	28.19	6.07	34.51	112.46	112.21	---	---	Peak

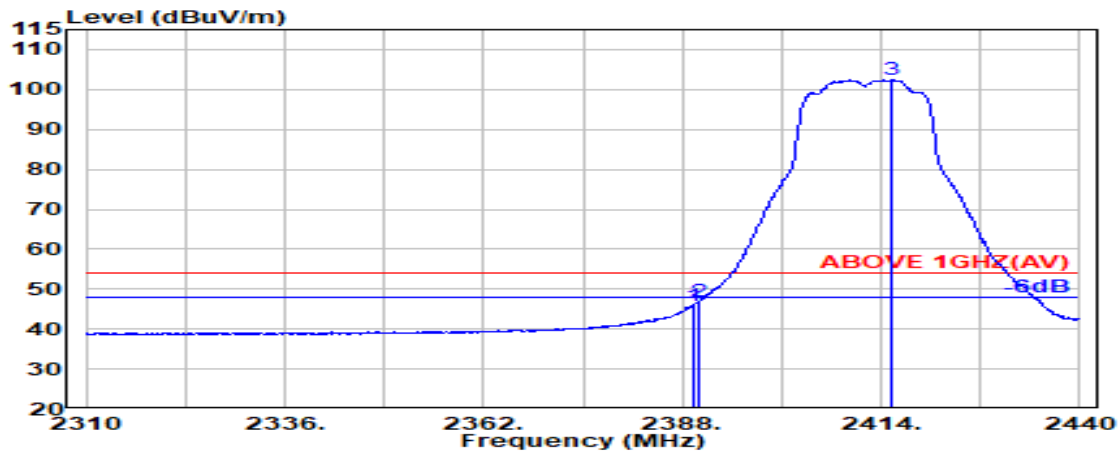


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	46.27	45.98	54.00	8.02	Average
2390.000	28.18	6.03	34.51	47.13	46.83	54.00	7.17	Average
@ 2415.300	28.19	6.07	34.51	102.59	102.34	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

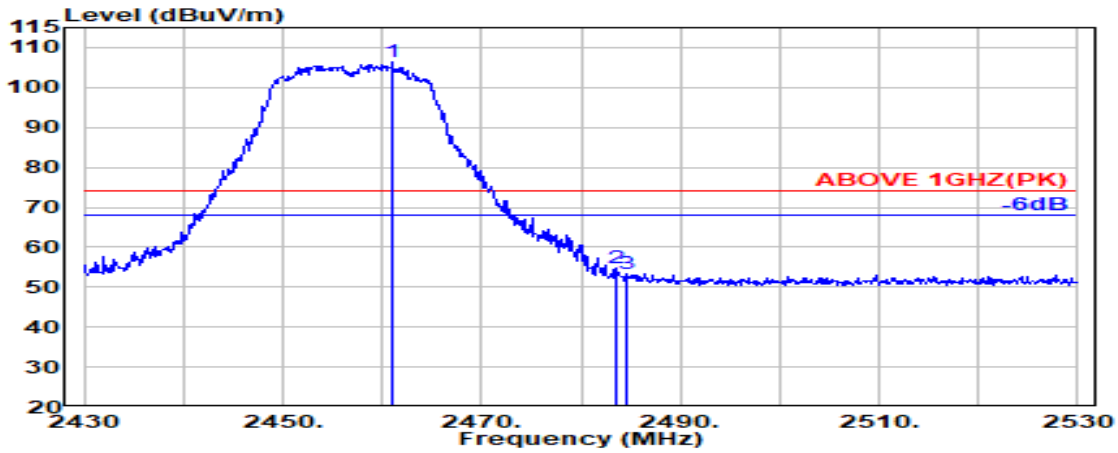

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.42	6.14	34.52	106.20	106.23	---	---	Peak
2483.500	28.47	6.17	34.53	54.73	54.83	74.00	19.17	Peak
2484.700	28.47	6.17	34.53	53.26	53.37	74.00	20.63	Peak

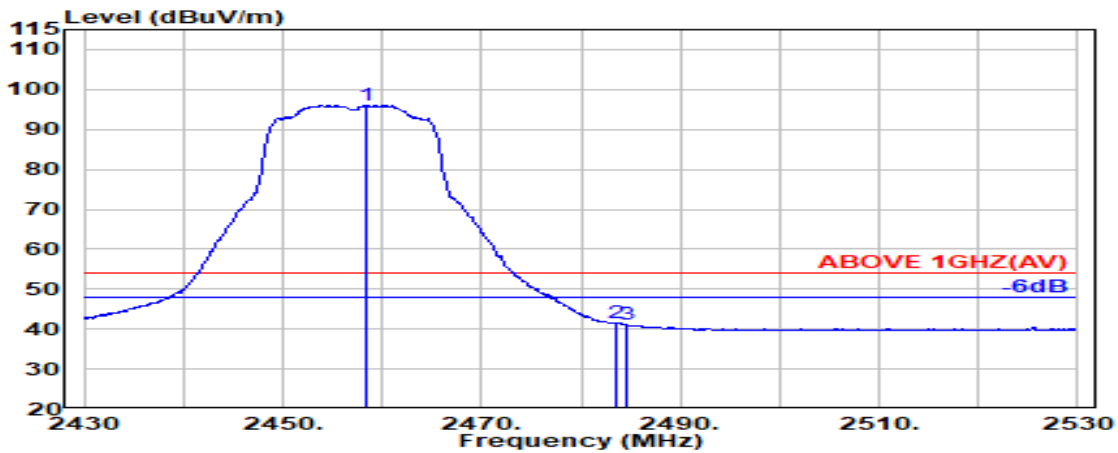


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.400	28.42	6.13	34.52	95.99	96.01	---	---	Average
2483.500	28.47	6.17	34.53	41.45	41.56	54.00	12.44	Average
2484.700	28.47	6.17	34.53	41.04	41.15	54.00	12.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

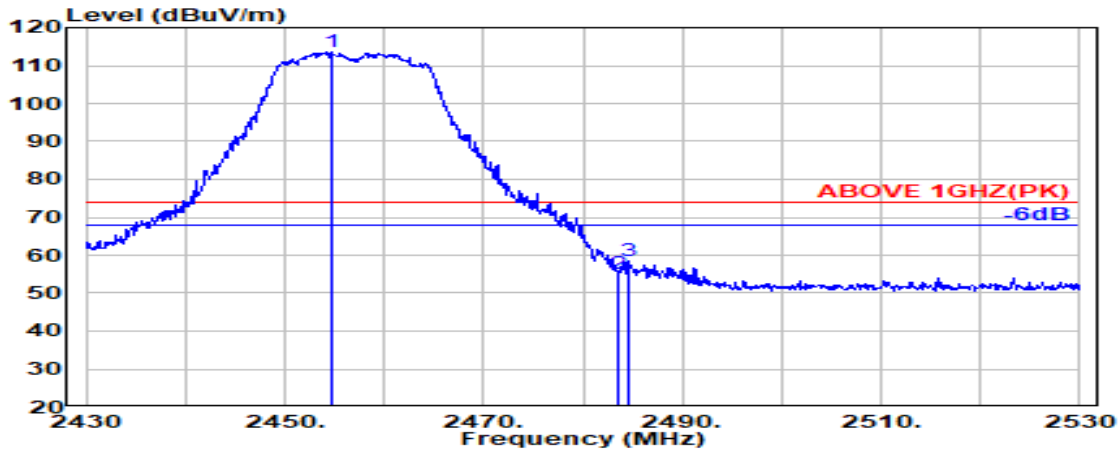

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.800	28.41	6.13	34.52	113.59	113.61	---	---	Peak
2483.500	28.47	6.17	34.53	55.09	55.19	74.00	18.81	Peak
2484.600	28.47	6.17	34.53	58.44	58.55	74.00	15.45	Peak

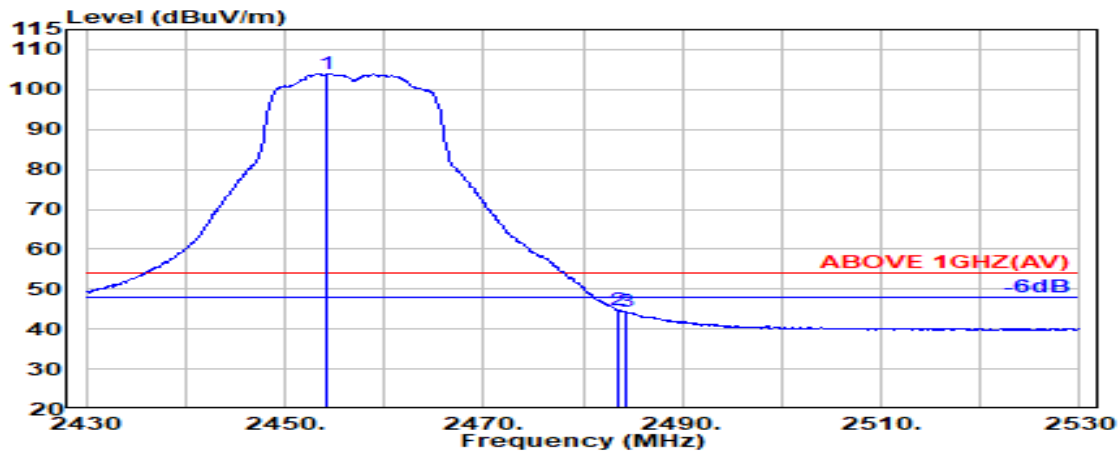


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.200	28.41	6.13	34.52	103.91	103.93	---	---	Average
2483.500	28.47	6.17	34.53	44.60	44.71	54.00	9.29	Average
2484.400	28.47	6.17	34.53	44.12	44.23	54.00	9.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

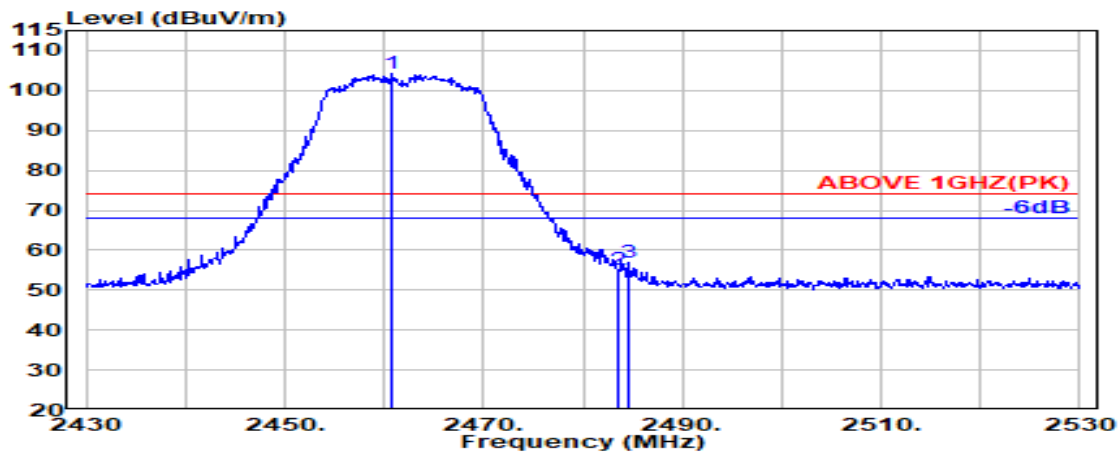

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.800	28.42	6.14	34.52	104.08	104.11	---	---	Peak
2483.500	28.47	6.17	34.53	54.92	55.03	74.00	18.97	Peak
2484.500	28.47	6.17	34.53	56.92	57.03	74.00	16.97	Peak

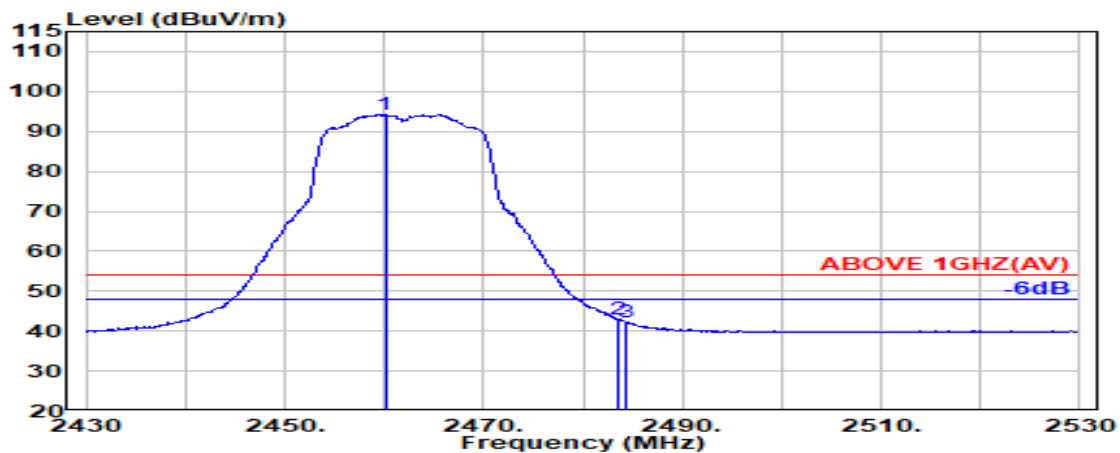


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.42	6.13	34.52	94.25	94.29	---	---	Average
2483.500	28.47	6.17	34.53	42.88	42.99	54.00	11.01	Average
2484.400	28.47	6.17	34.53	42.17	42.28	54.00	11.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

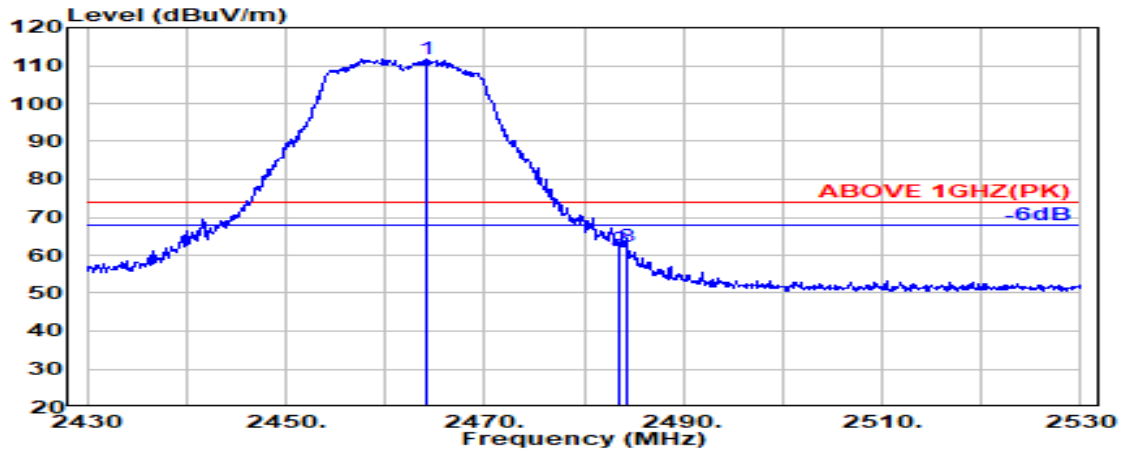

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.43	6.14	34.52	111.61	111.66	---	---	Peak
2483.500	28.47	6.17	34.53	61.55	61.66	74.00	12.34	Peak
2484.400	28.47	6.17	34.53	62.21	62.32	74.00	11.68	Peak

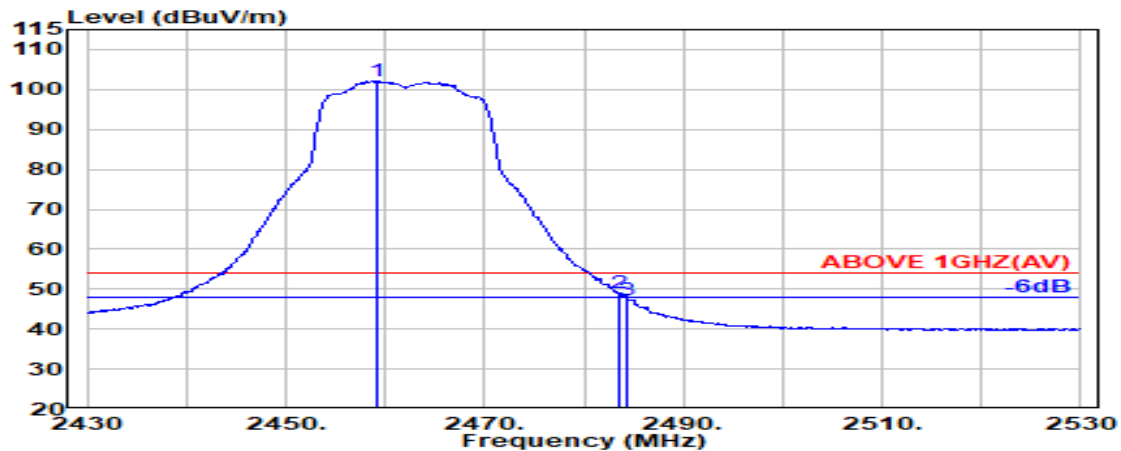


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.300	28.42	6.13	34.52	102.05	102.08	---	---	Average
2483.500	28.47	6.17	34.53	48.95	49.06	54.00	4.94	Average
2484.400	28.47	6.17	34.53	47.29	47.40	54.00	6.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

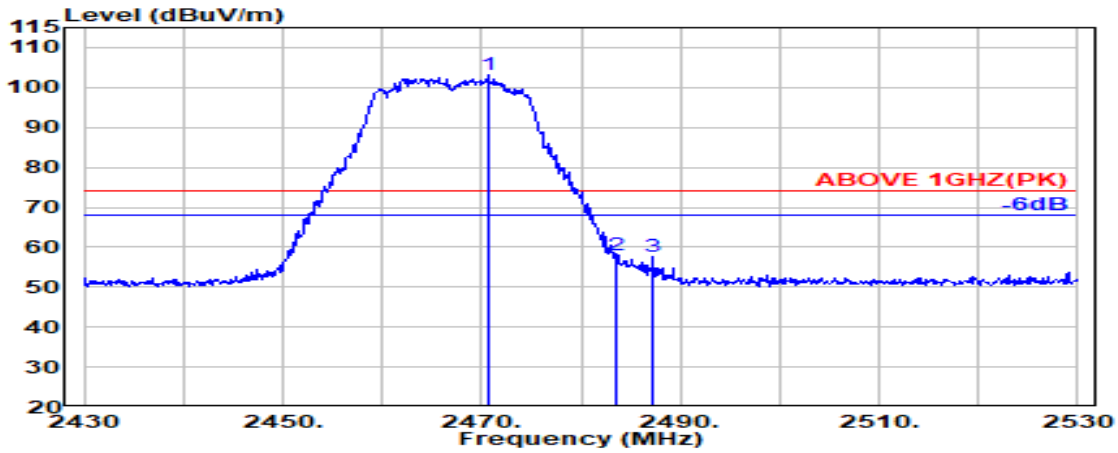

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.600	28.44	6.15	34.52	102.97	103.04	---	---	Peak
2483.500	28.47	6.17	34.53	57.88	57.98	74.00	16.02	Peak
2487.300	28.47	6.17	34.53	57.42	57.54	74.00	16.46	Peak




Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.43	6.14	34.52	92.73	92.78	---	---	Average
2483.500	28.47	6.17	34.53	45.34	45.45	54.00	8.55	Average
2484.400	28.47	6.17	34.53	43.69	43.80	54.00	10.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

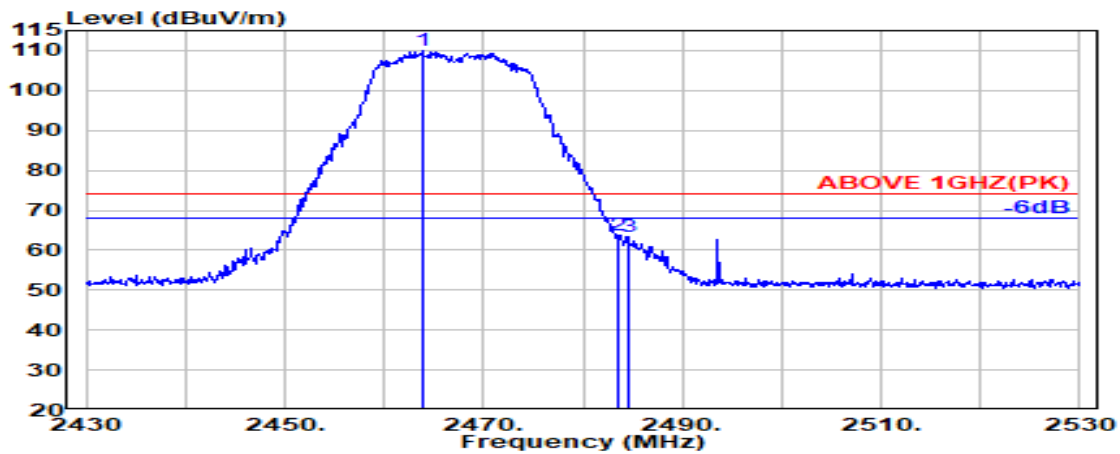

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.900	28.43	6.14	34.52	109.90	109.94	---	---	Peak
2483.500	28.47	6.17	34.53	63.54	63.65	74.00	10.35	Peak
2484.600	28.47	6.17	34.53	63.36	63.48	74.00	10.52	Peak

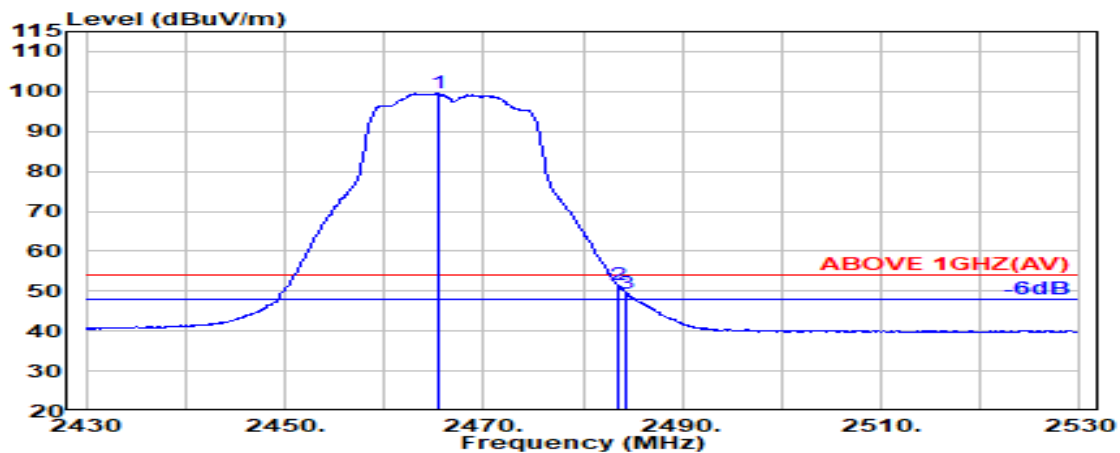


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.43	6.14	34.52	99.44	99.49	---	---	Average
2483.500	28.47	6.17	34.53	51.37	51.47	54.00	2.53	Average
2484.400	28.47	6.17	34.53	49.28	49.39	54.00	4.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

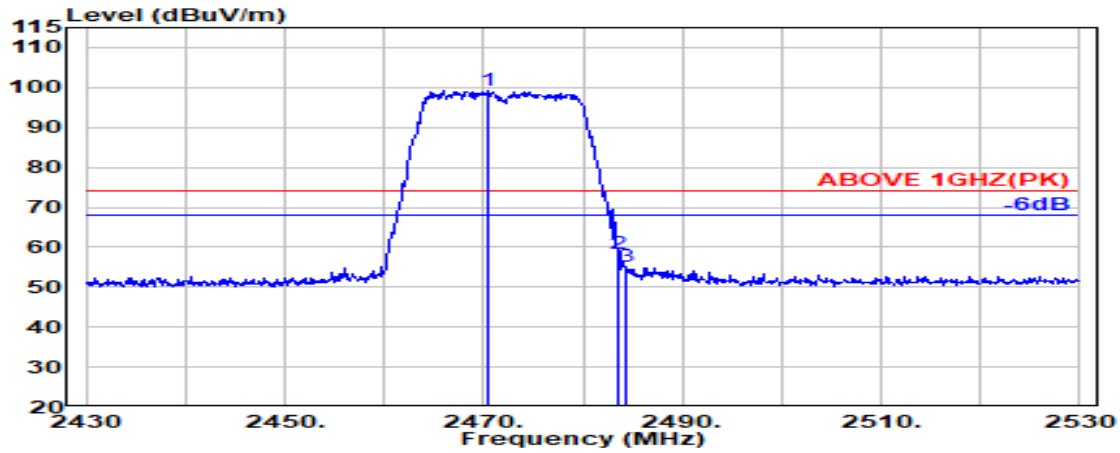

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	28.44	6.15	34.52	99.11	99.17	---	---	Peak
2483.500	28.47	6.17	34.53	58.29	58.39	74.00	15.61	Peak
2484.400	28.47	6.17	34.53	54.91	55.02	74.00	18.98	Peak

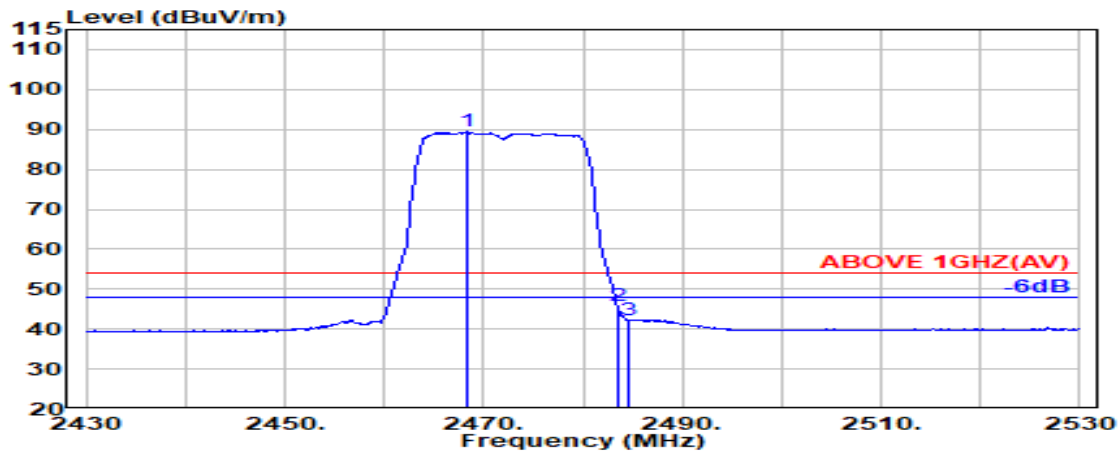


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	28.44	6.15	34.52	89.33	89.39	---	---	Average
2483.500	28.47	6.17	34.53	45.59	45.70	54.00	8.30	Average
2484.500	28.47	6.17	34.53	42.24	42.36	54.00	11.64	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

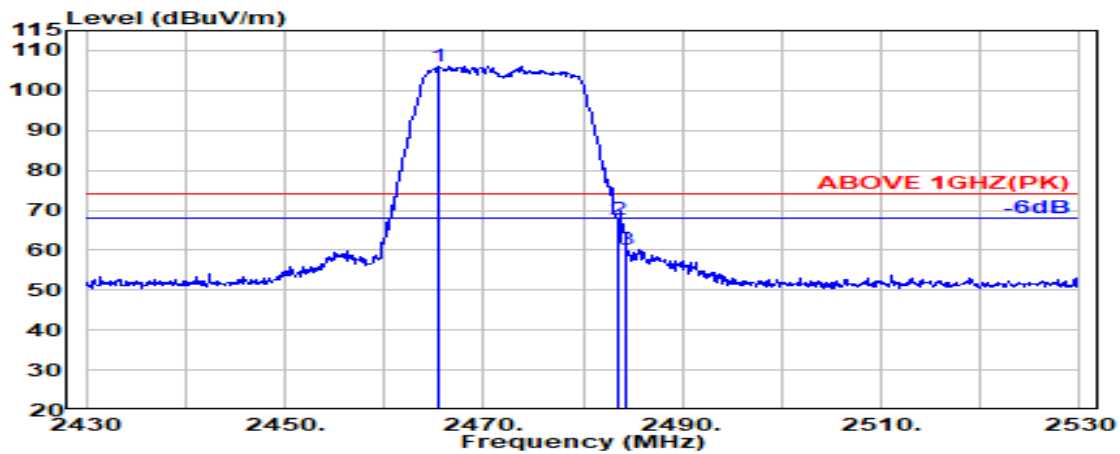

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.43	6.14	34.52	106.05	106.10	---	---	Peak
2483.500	28.47	6.17	34.53	67.59	67.70	74.00	6.30	Peak
2484.400	28.47	6.17	34.53	60.08	60.19	74.00	13.81	Peak

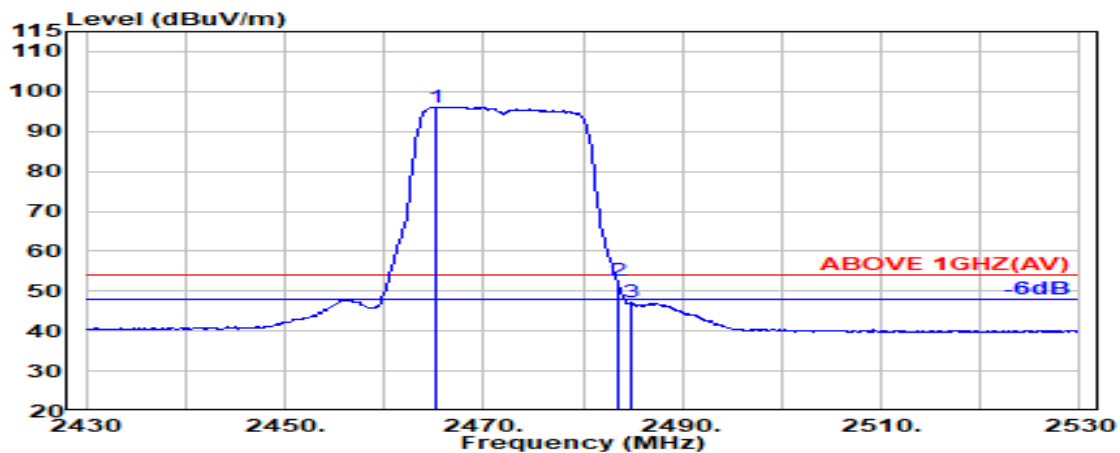


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.43	6.14	34.52	96.11	96.16	---	---	Average
2483.500	28.47	6.17	34.53	52.35	52.46	54.00	1.54	Average
2484.800	28.47	6.17	34.53	47.01	47.12	54.00	6.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

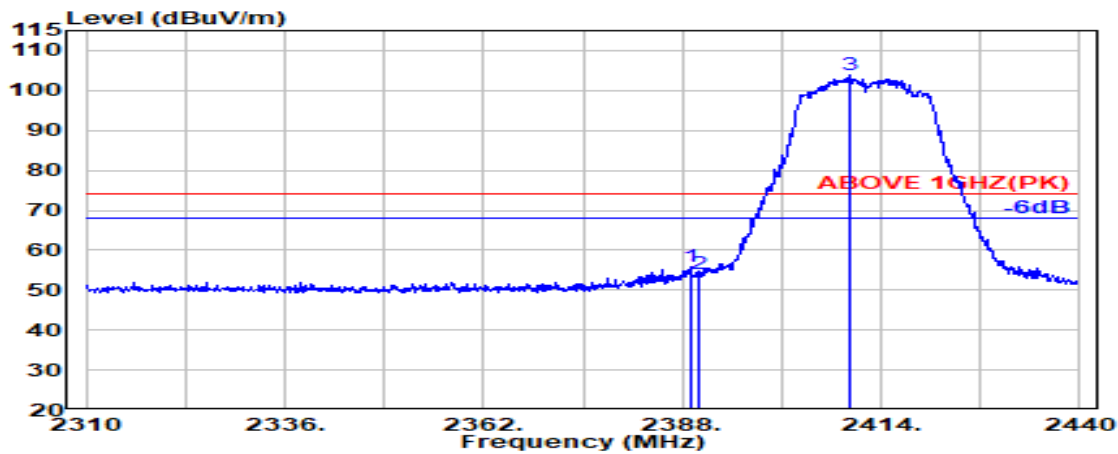

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.51	56.01	55.73	74.00	18.27	Peak
2390.000	28.18	6.03	34.51	54.47	54.18	74.00	19.82	Peak
@ 2409.900	28.16	6.06	34.51	104.02	103.73	---	---	Peak

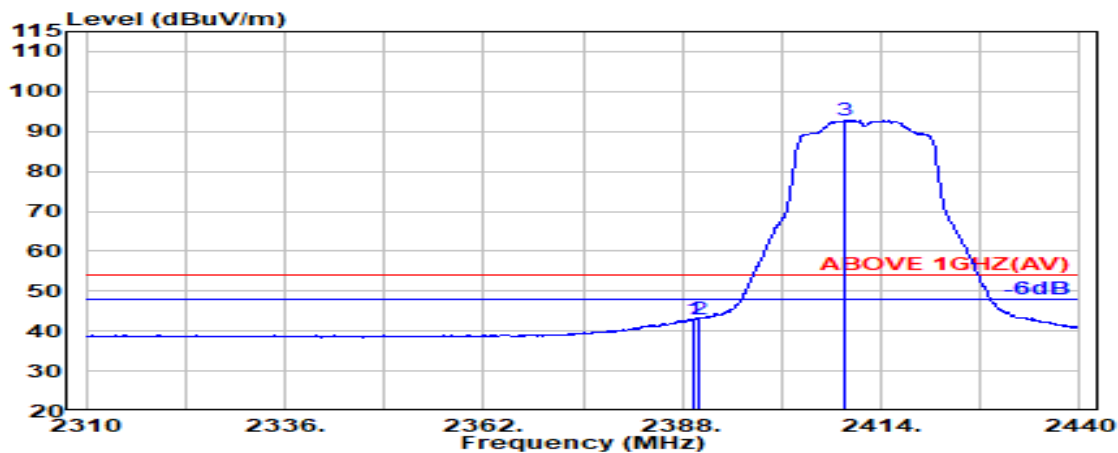


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	43.33	43.04	54.00	10.96	Average
2390.000	28.18	6.03	34.51	43.28	42.98	54.00	11.02	Average
@ 2409.300	28.16	6.06	34.51	93.19	92.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

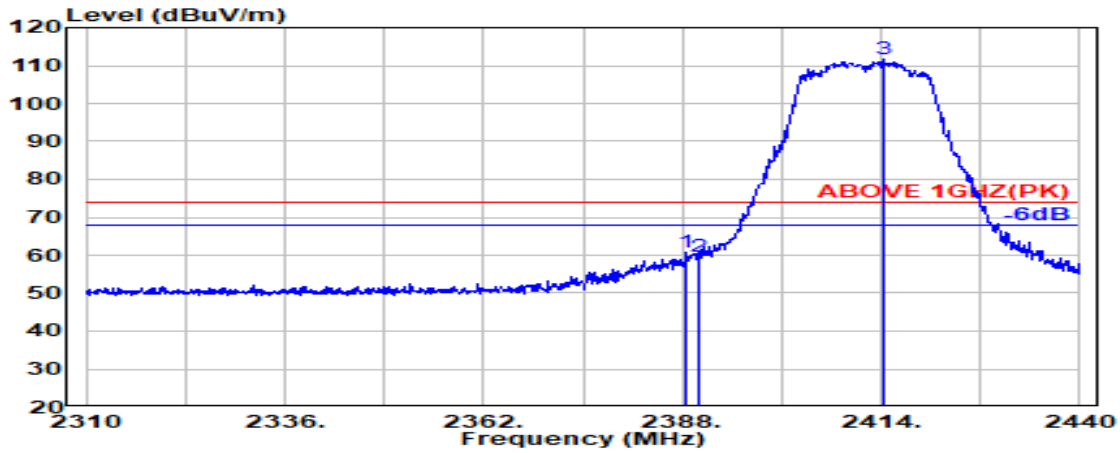

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.19	6.03	34.51	60.93	60.64	74.00	13.36	Peak
2390.000	28.18	6.03	34.51	59.94	59.65	74.00	14.35	Peak
@ 2414.200	28.19	6.07	34.51	111.84	111.58	---	---	Peak

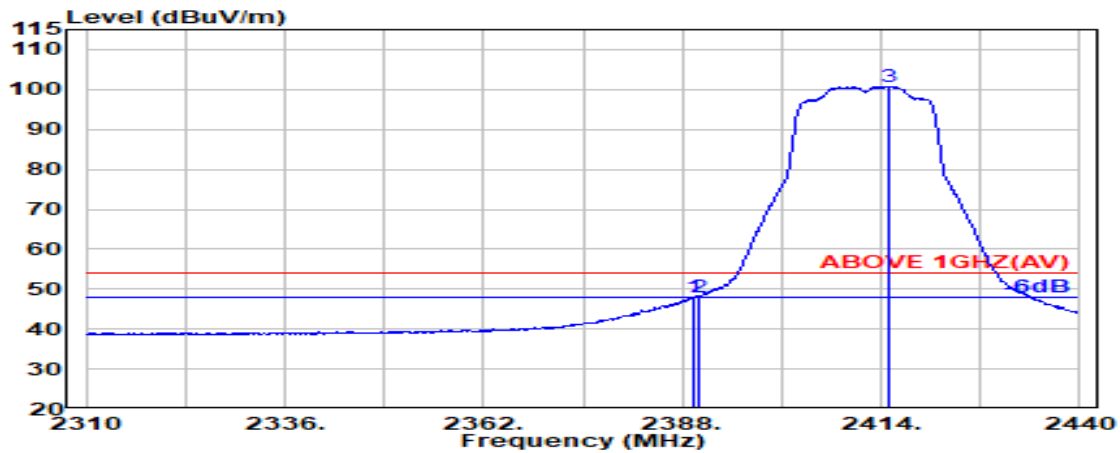


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	48.21	47.92	54.00	6.08	Average
2390.000	28.18	6.03	34.51	48.40	48.11	54.00	5.89	Average
@ 2415.000	28.19	6.07	34.51	100.91	100.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

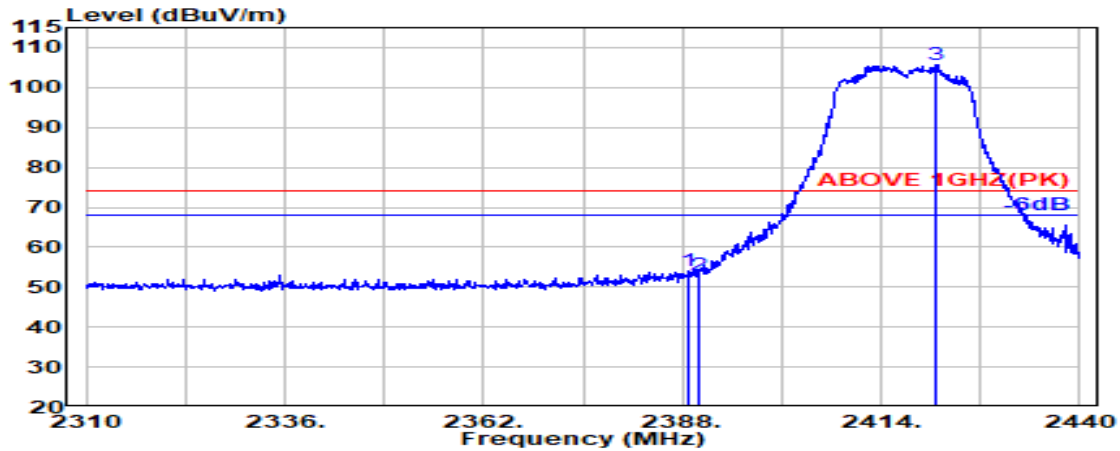

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.51	54.49	54.20	74.00	19.80	Peak
2390.000	28.18	6.03	34.51	53.33	53.04	74.00	20.96	Peak
@ 2421.000	28.23	6.08	34.51	105.97	105.77	---	---	Peak

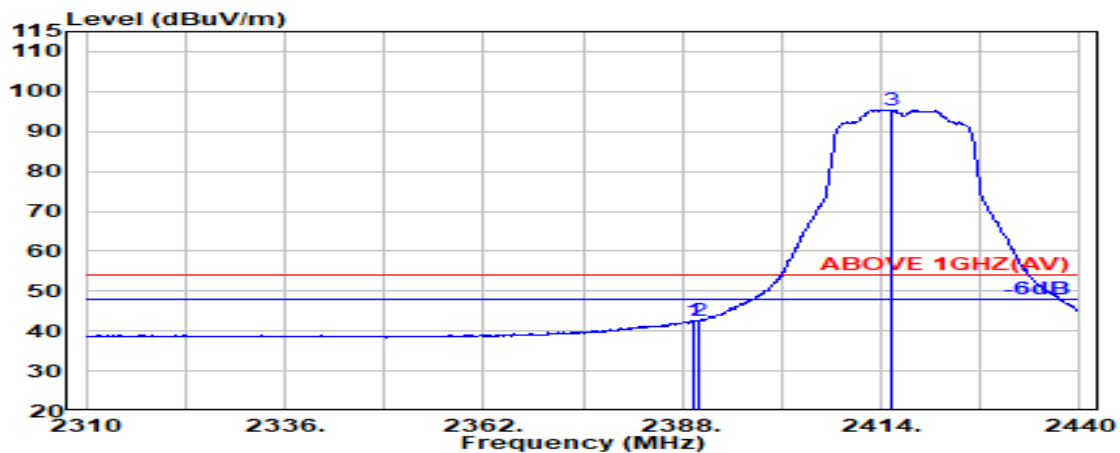


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	42.80	42.51	54.00	11.49	Average
2390.000	28.18	6.03	34.51	42.93	42.64	54.00	11.36	Average
@ 2415.500	28.19	6.07	34.51	95.67	95.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

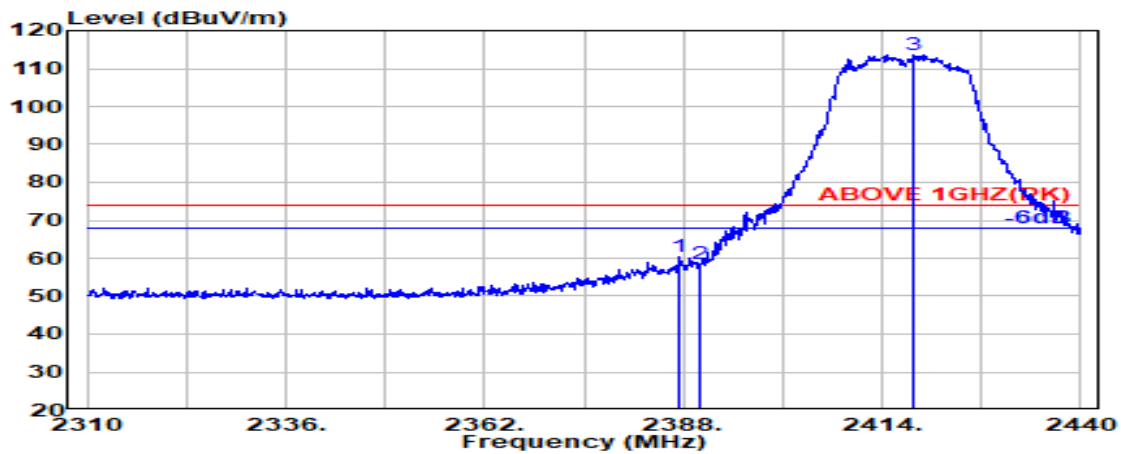

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.600	28.20	6.03	34.51	60.51	60.24	74.00	13.76	Peak
2390.000	28.18	6.03	34.51	58.60	58.31	74.00	15.69	Peak
@ 2418.100	28.21	6.08	34.51	113.82	113.59	---	---	Peak

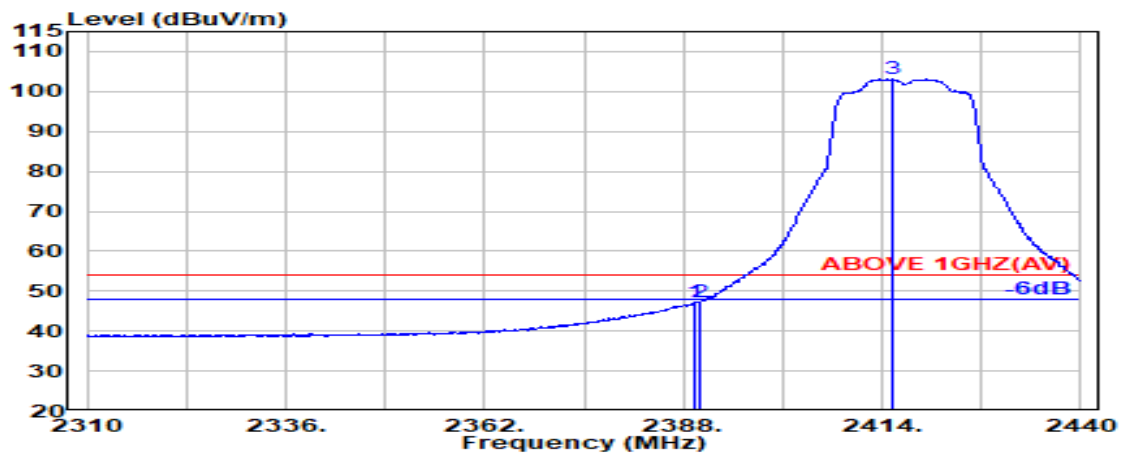


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	47.37	47.08	54.00	6.92	Average
2390.000	28.18	6.03	34.51	47.44	47.15	54.00	6.85	Average
@ 2415.300	28.19	6.07	34.51	103.35	103.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

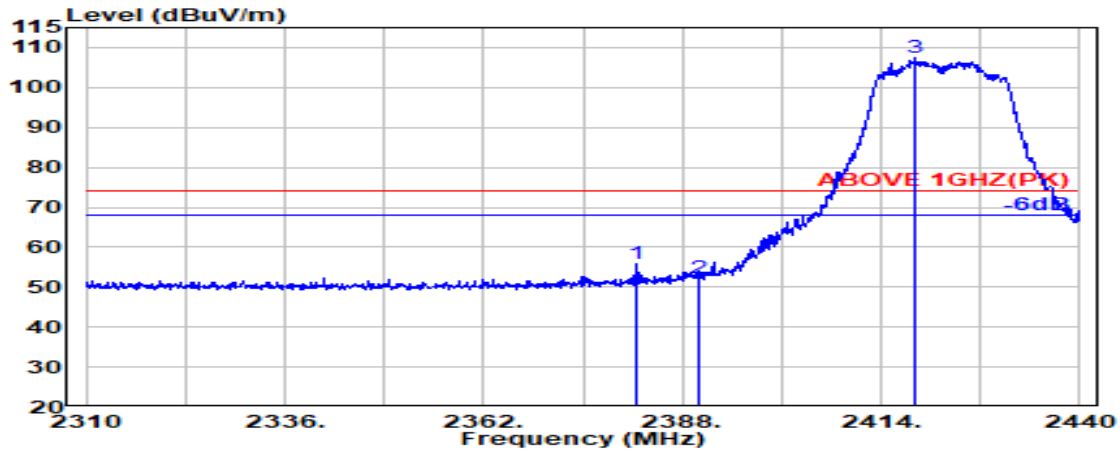

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.100	28.24	6.02	34.51	56.17	55.93	74.00	18.07	Peak
2390.000	28.18	6.03	34.51	52.57	52.28	74.00	21.72	Peak
@ 2418.500	28.21	6.08	34.51	107.55	107.32	---	---	Peak

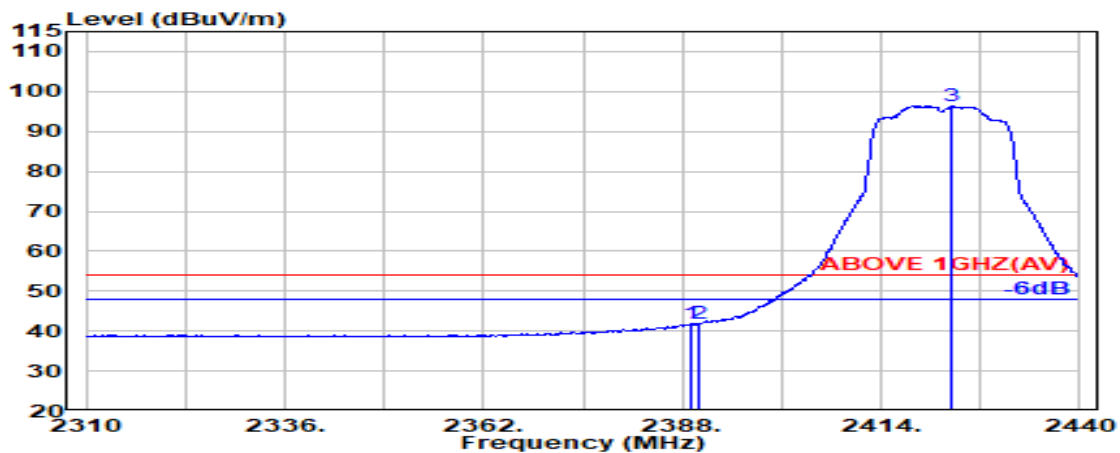


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.51	42.21	41.92	54.00	12.08	Average
2390.000	28.18	6.03	34.51	42.14	41.84	54.00	12.16	Average
@ 2423.300	28.24	6.08	34.51	96.64	96.45	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2422MHz
------	--------------	-----------	------------

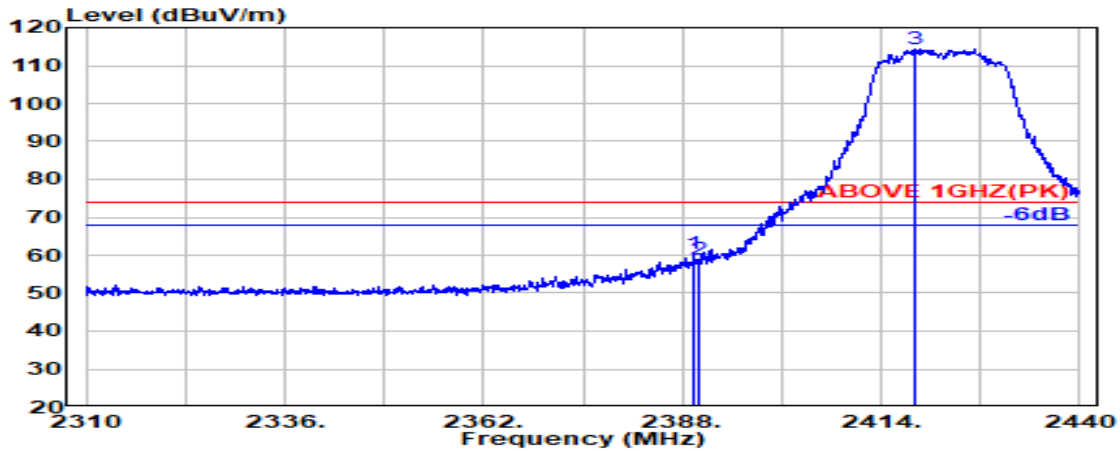

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	60.49	60.20	74.00	13.80	Peak
2390.000	28.18	6.03	34.51	59.03	58.73	74.00	15.27	Peak
@ 2418.300	28.21	6.08	34.51	114.74	114.51	---	---	Peak

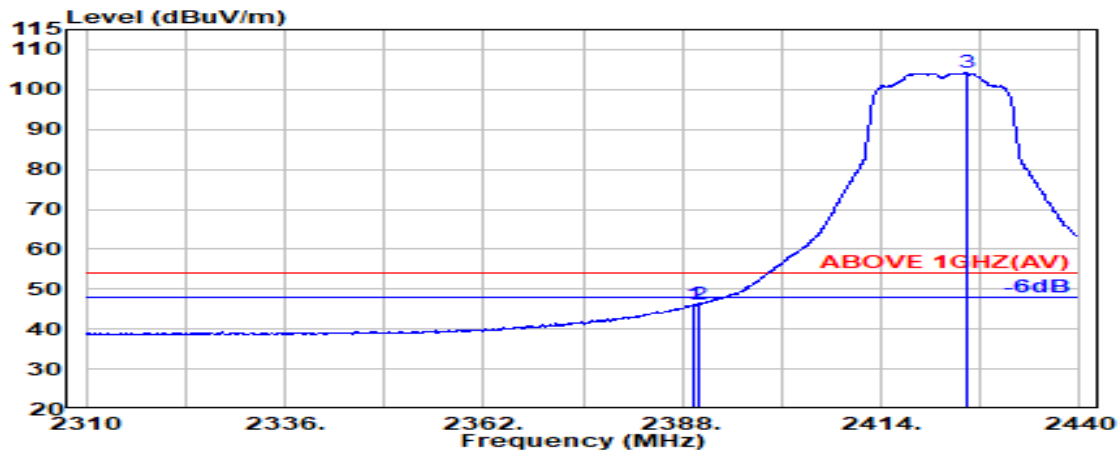


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	46.31	46.02	54.00	7.98	Average
2390.000	28.18	6.03	34.51	46.44	46.15	54.00	7.85	Average
@ 2425.100	28.25	6.09	34.52	104.31	104.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

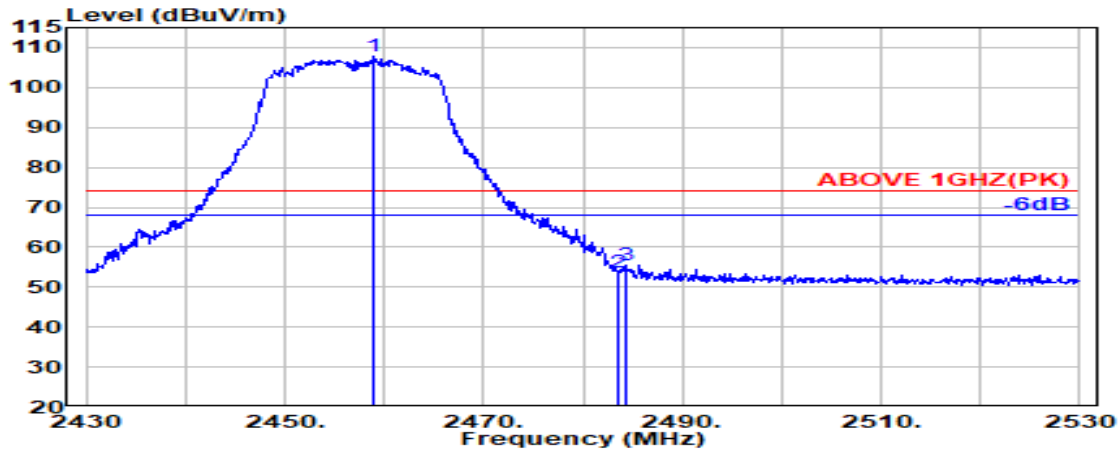

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.42	6.13	34.52	107.64	107.67	---	---	Peak
2483.500	28.47	6.17	34.53	53.71	53.81	74.00	20.19	Peak
2484.400	28.47	6.17	34.53	55.50	55.61	74.00	18.39	Peak

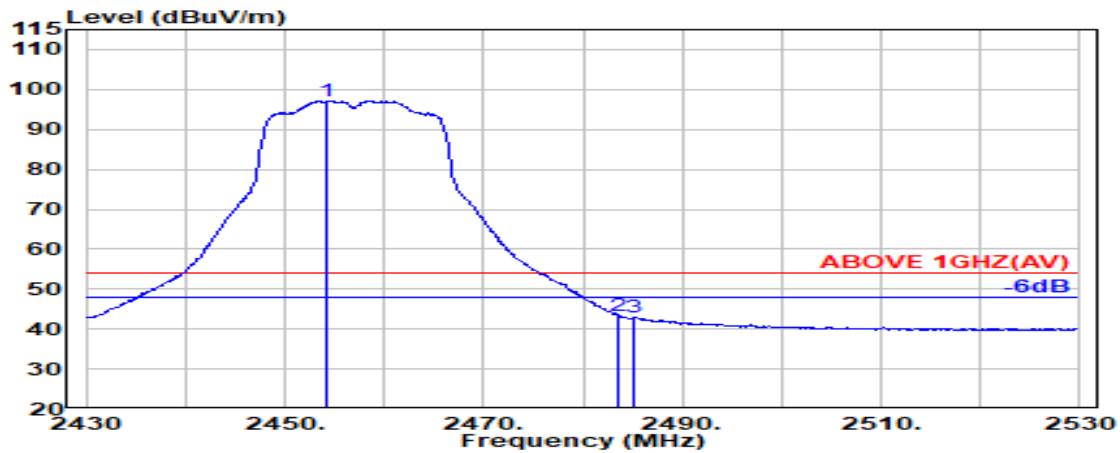


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.300	28.41	6.13	34.52	97.10	97.11	---	---	Average
2483.500	28.47	6.17	34.53	43.26	43.37	54.00	10.63	Average
2485.200	28.47	6.17	34.53	42.88	43.00	54.00	11.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

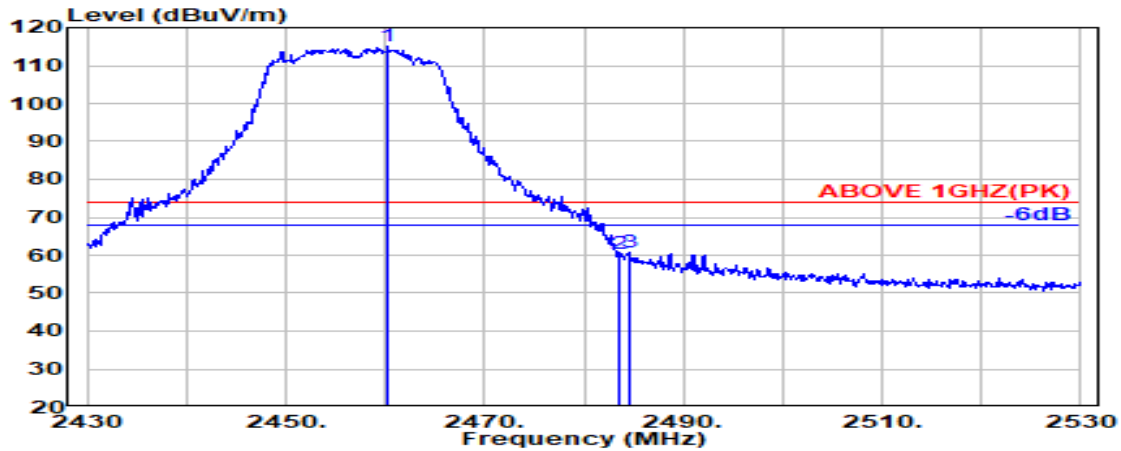

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	28.42	6.13	34.52	114.92	114.95	---	---	Peak
2483.500	28.47	6.17	34.53	60.34	60.45	74.00	13.55	Peak
2484.700	28.47	6.17	34.53	60.51	60.63	74.00	13.37	Peak

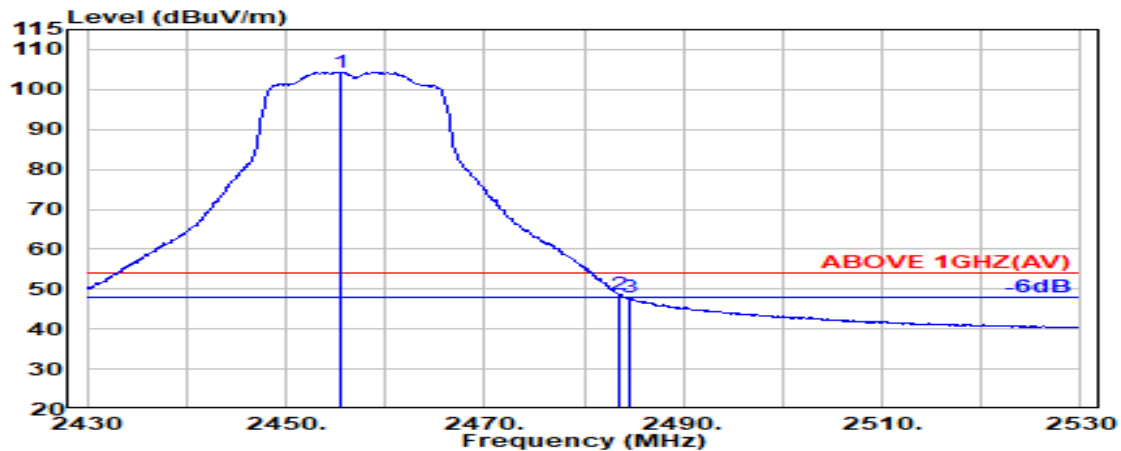


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	28.41	6.13	34.52	104.33	104.34	---	---	Average
2483.500	28.47	6.17	34.53	48.70	48.81	54.00	5.19	Average
2484.500	28.47	6.17	34.53	47.69	47.80	54.00	6.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

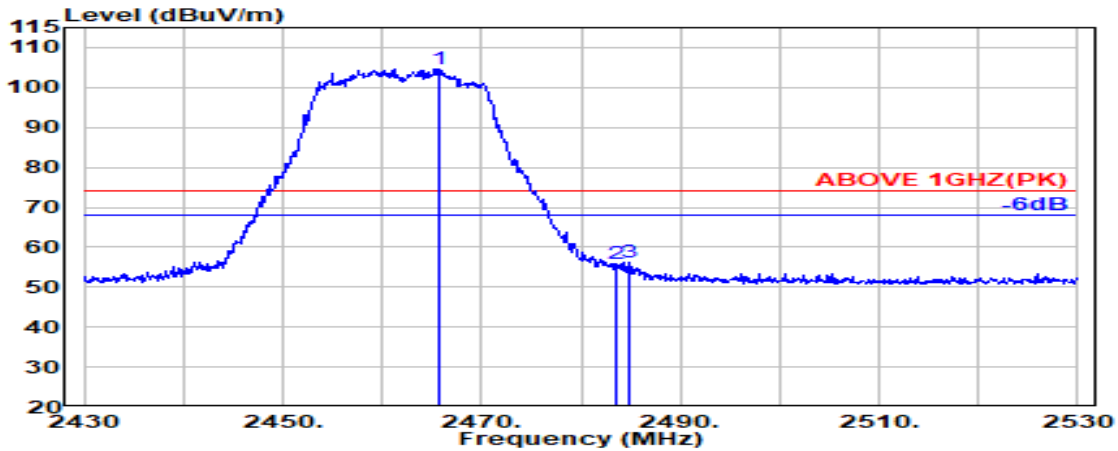

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.43	6.14	34.52	104.59	104.64	---	---	Peak
2483.500	28.47	6.17	34.53	55.68	55.78	74.00	18.22	Peak
2484.800	28.47	6.17	34.53	55.94	56.05	74.00	17.95	Peak

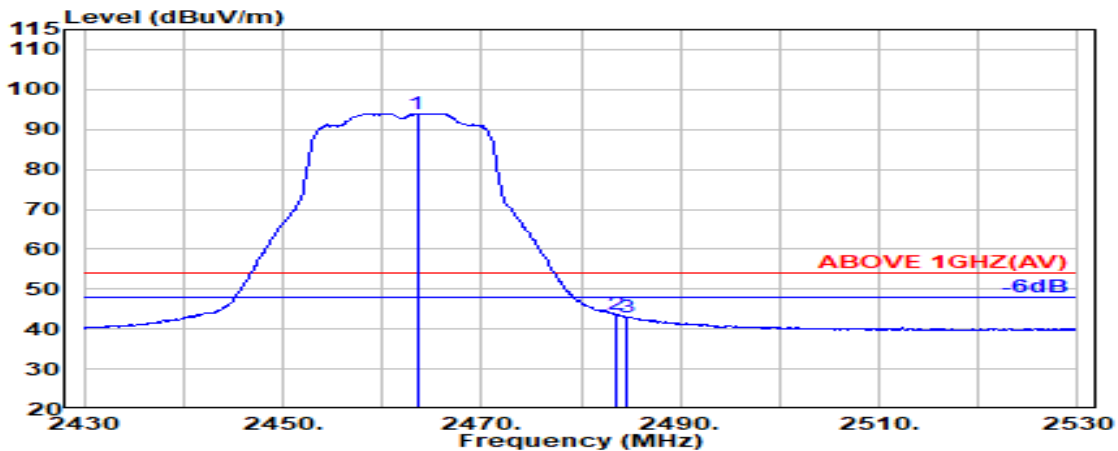


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.43	6.14	34.52	93.92	93.97	---	---	Average
2483.500	28.47	6.17	34.53	43.53	43.64	54.00	10.36	Average
2484.500	28.47	6.17	34.53	43.00	43.11	54.00	10.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

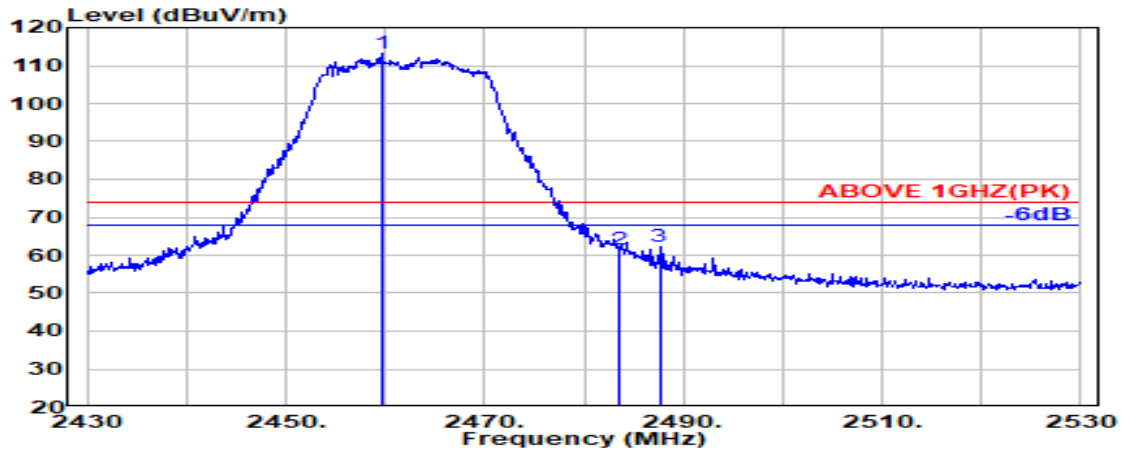

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.600	28.42	6.13	34.52	113.07	113.10	---	---	Peak
2483.500	28.47	6.17	34.53	61.41	61.52	74.00	12.48	Peak
2487.600	28.48	6.17	34.53	62.28	62.41	74.00	11.59	Peak

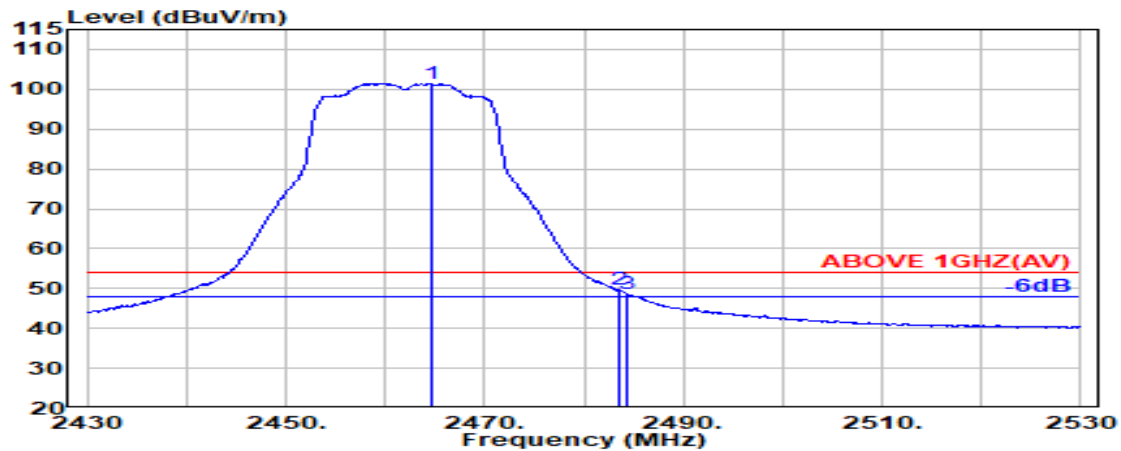


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.600	28.43	6.14	34.52	101.42	101.47	---	---	Average
2483.500	28.47	6.17	34.53	49.51	49.61	54.00	4.39	Average
2484.400	28.47	6.17	34.53	48.45	48.56	54.00	5.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

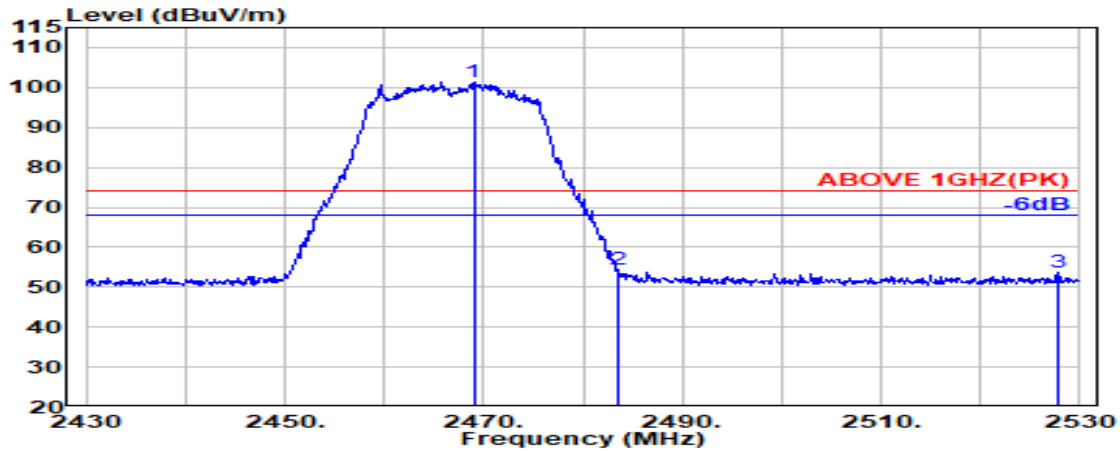

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	28.44	6.15	34.52	101.48	101.54	---	---	Peak
2483.500	28.47	6.17	34.53	54.37	54.48	74.00	19.52	Peak
2527.700	28.67	6.22	34.54	53.36	53.71	74.00	20.29	Peak

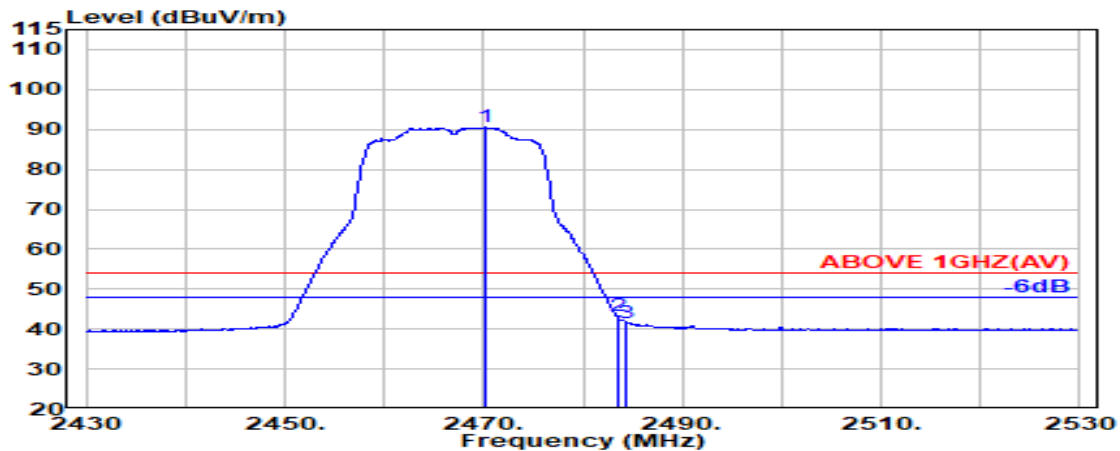


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.300	28.44	6.15	34.52	90.46	90.52	---	---	Average
2483.500	28.47	6.17	34.53	43.06	43.16	54.00	10.84	Average
2484.400	28.47	6.17	34.53	41.44	41.55	54.00	12.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

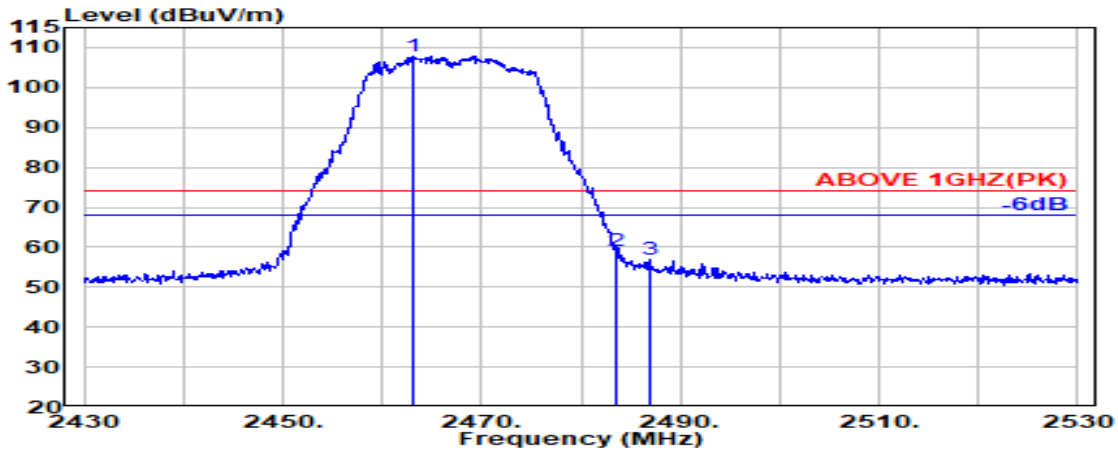

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.200	28.43	6.14	34.52	107.71	107.75	---	---	Peak
2483.500	28.47	6.17	34.53	59.04	59.15	74.00	14.85	Peak
2486.900	28.47	6.17	34.53	56.80	56.92	74.00	17.08	Peak

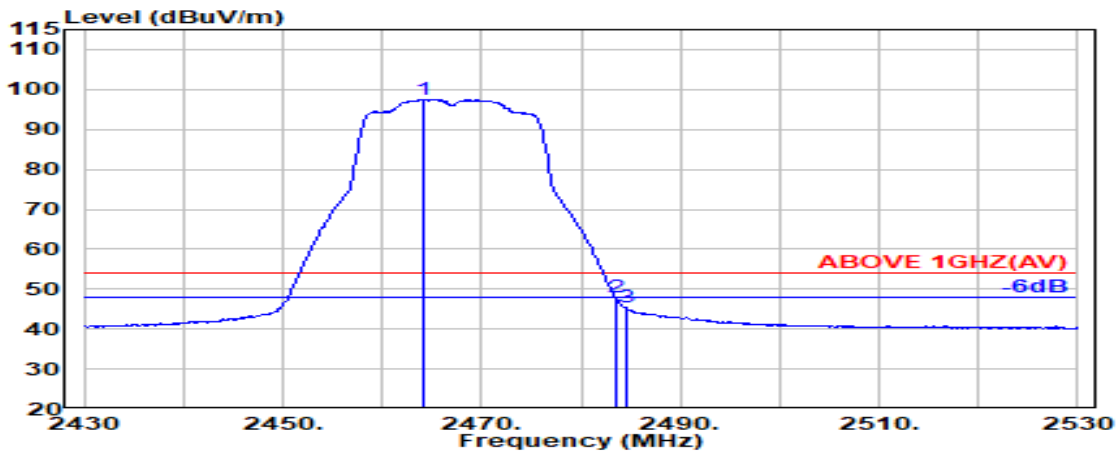


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	6.14	34.52	97.52	97.56	---	---	Average
2483.500	28.47	6.17	34.53	47.95	48.06	54.00	5.94	Average
2484.500	28.47	6.17	34.53	45.31	45.42	54.00	8.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

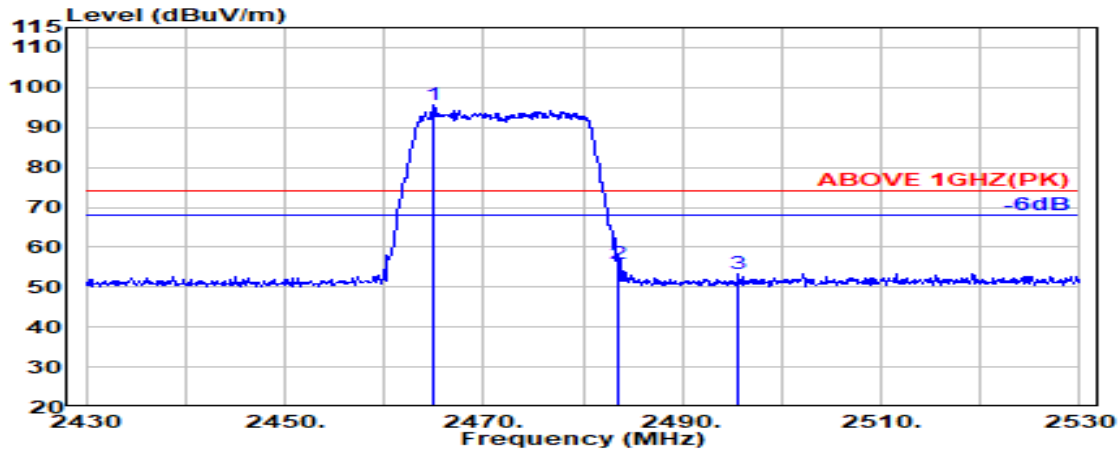

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.43	6.14	34.52	95.66	95.71	---	---	Peak
2483.500	28.47	6.17	34.53	55.64	55.74	74.00	18.26	Peak
2495.700	28.49	6.18	34.53	53.24	53.39	74.00	20.61	Peak

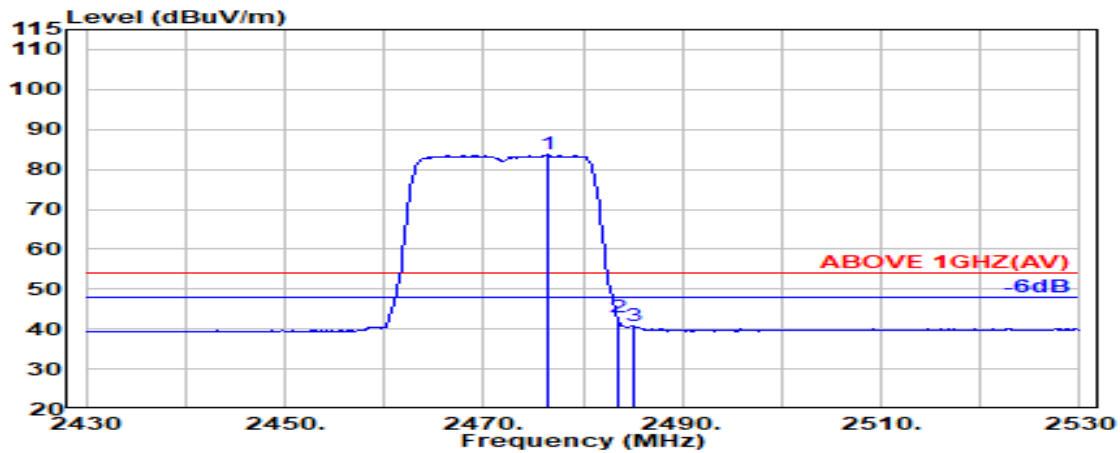


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.45	6.16	34.53	83.66	83.74	---	---	Average
2483.500	28.47	6.17	34.53	42.90	43.01	54.00	10.99	Average
2485.000	28.47	6.17	34.53	40.62	40.74	54.00	13.26	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

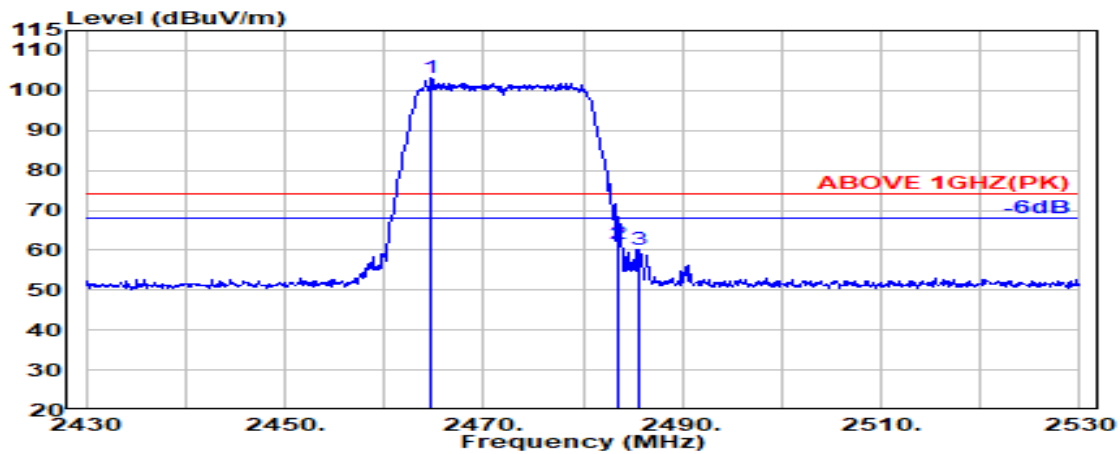

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	28.43	6.14	34.52	103.19	103.23	---	---	Peak
2483.500	28.47	6.17	34.53	61.52	61.63	74.00	12.37	Peak
2485.600	28.47	6.17	34.53	60.21	60.32	74.00	13.68	Peak

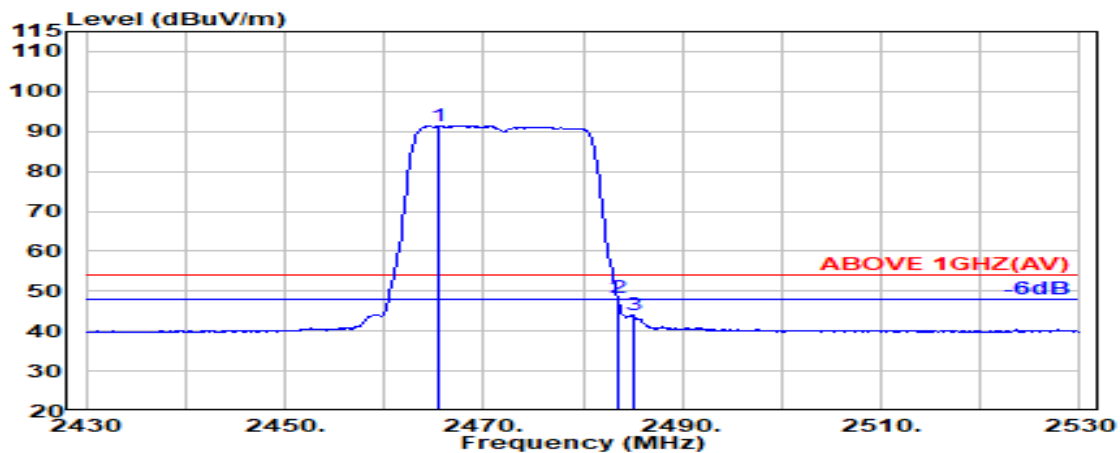


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.43	6.14	34.52	91.41	91.46	---	---	Average
2483.500	28.47	6.17	34.53	48.28	48.38	54.00	5.62	Average
2485.000	28.47	6.17	34.53	43.82	43.93	54.00	10.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

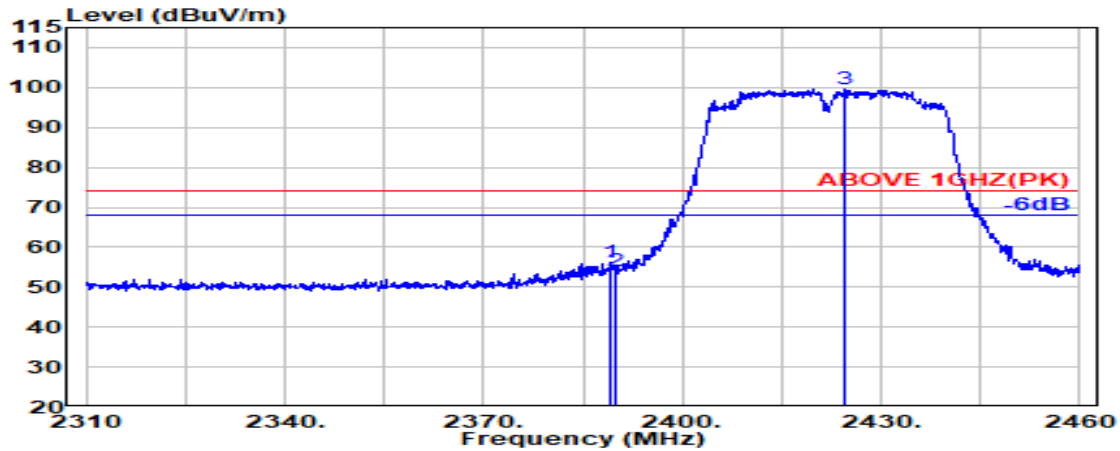

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.51	56.32	56.03	74.00	17.97	Peak
2390.000	28.18	6.03	34.51	54.52	54.23	74.00	19.77	Peak
@ 2424.600	28.25	6.08	34.51	99.81	99.63	---	---	Peak

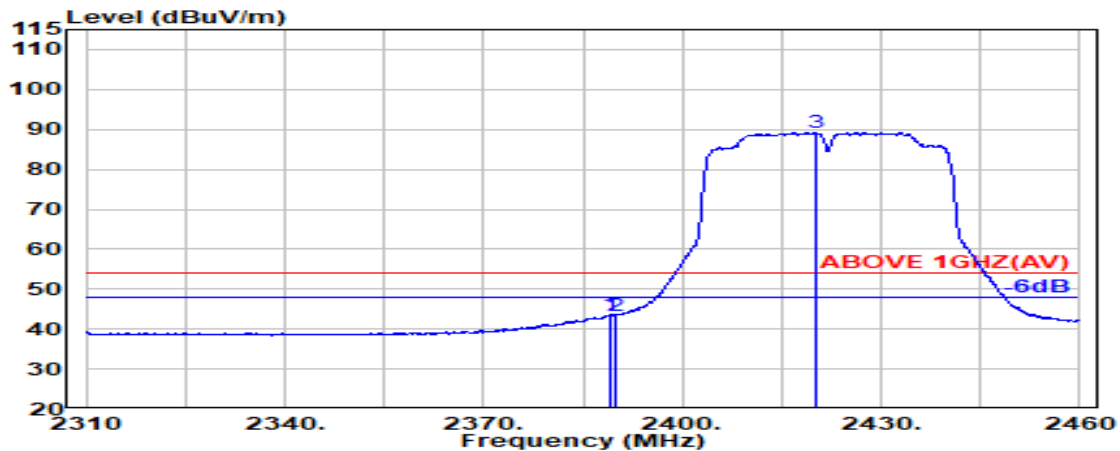


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.51	43.93	43.64	54.00	10.36	Average
2390.000	28.18	6.03	34.51	43.46	43.16	54.00	10.84	Average
@ 2420.100	28.22	6.08	34.51	89.42	89.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

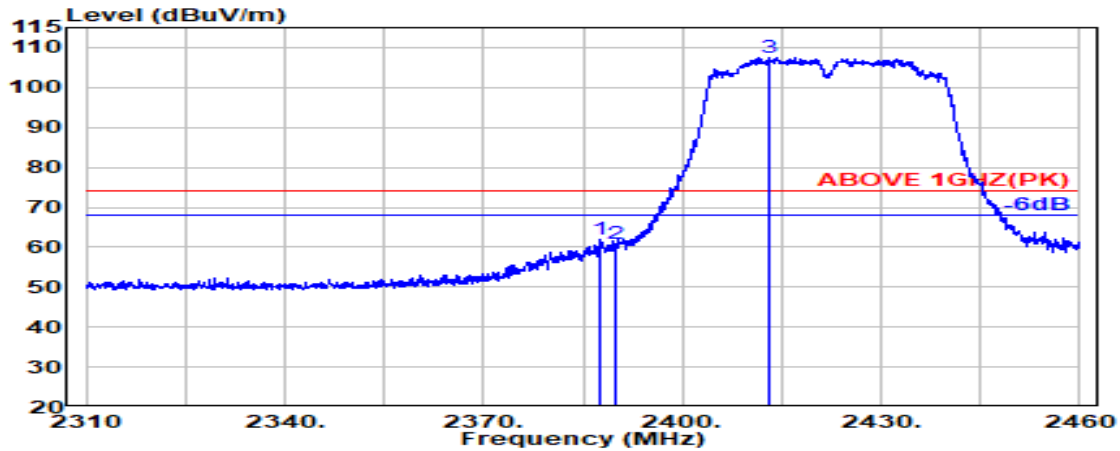

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	28.20	6.03	34.51	62.19	61.92	74.00	12.08	Peak
2390.000	28.18	6.03	34.51	61.27	60.97	74.00	13.03	Peak
@ 2413.200	28.18	6.07	34.51	107.70	107.43	---	---	Peak

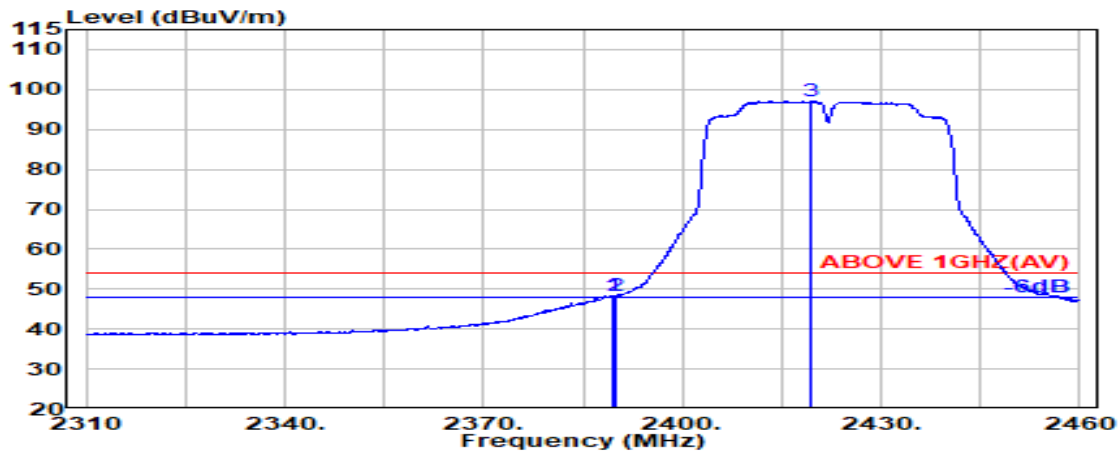


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	48.58	48.29	54.00	5.71	Average
2390.000	28.18	6.03	34.51	48.64	48.34	54.00	5.66	Average
@ 2419.500	28.22	6.08	34.51	97.23	97.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

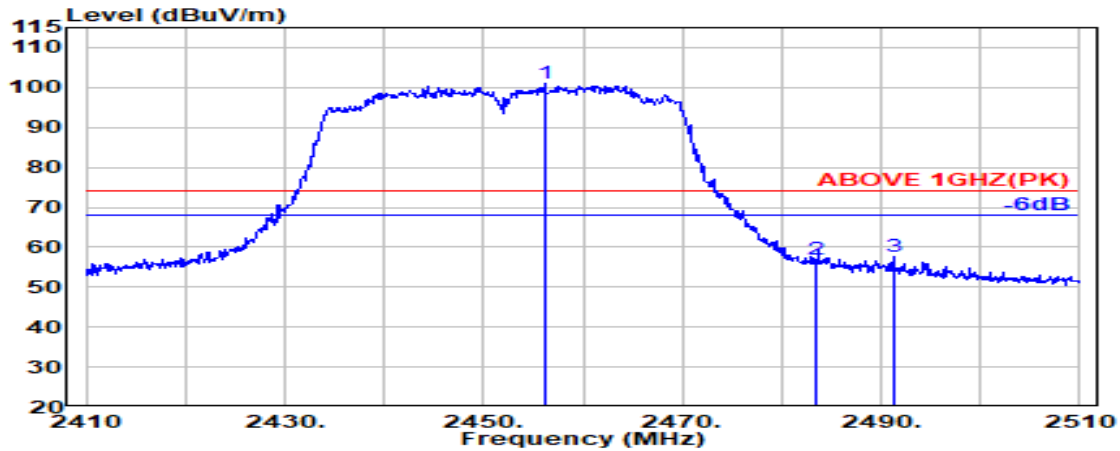

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.100	28.41	6.13	34.52	101.03	101.05	---	---	Peak
2483.500	28.47	6.17	34.53	56.66	56.77	74.00	17.23	Peak
2491.200	28.48	6.18	34.53	57.35	57.48	74.00	16.52	Peak

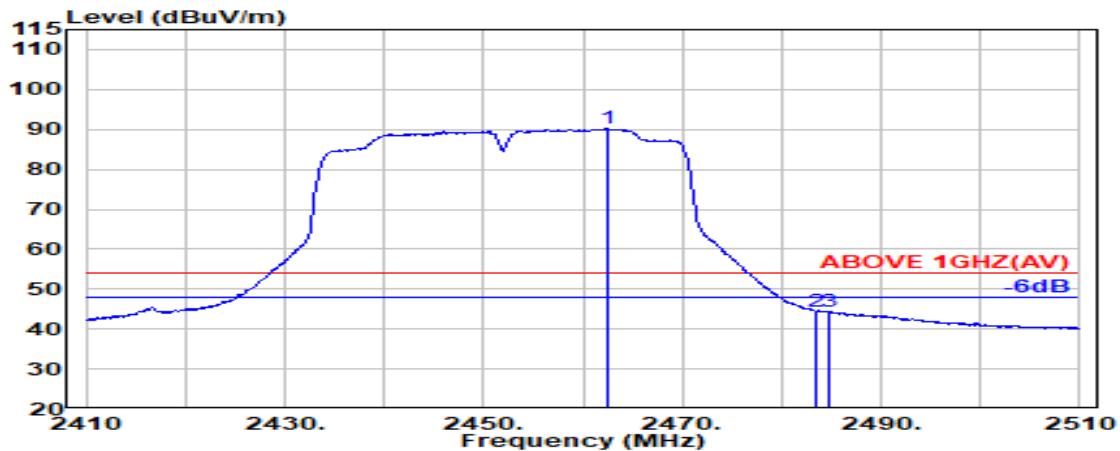


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.400	28.42	6.14	34.52	90.15	90.19	---	---	Average
2483.500	28.47	6.17	34.53	44.37	44.48	54.00	9.52	Average
2484.700	28.47	6.17	34.53	44.29	44.40	54.00	9.60	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

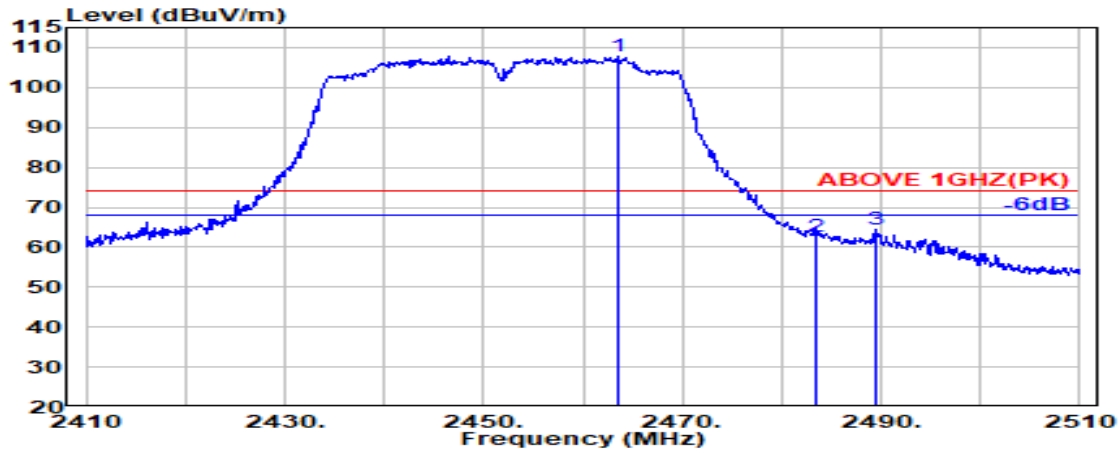

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.43	6.14	34.52	107.90	107.94	---	---	Peak
2483.500	28.47	6.17	34.53	62.73	62.84	74.00	11.16	Peak
2489.600	28.48	6.18	34.53	64.42	64.55	74.00	9.45	Peak

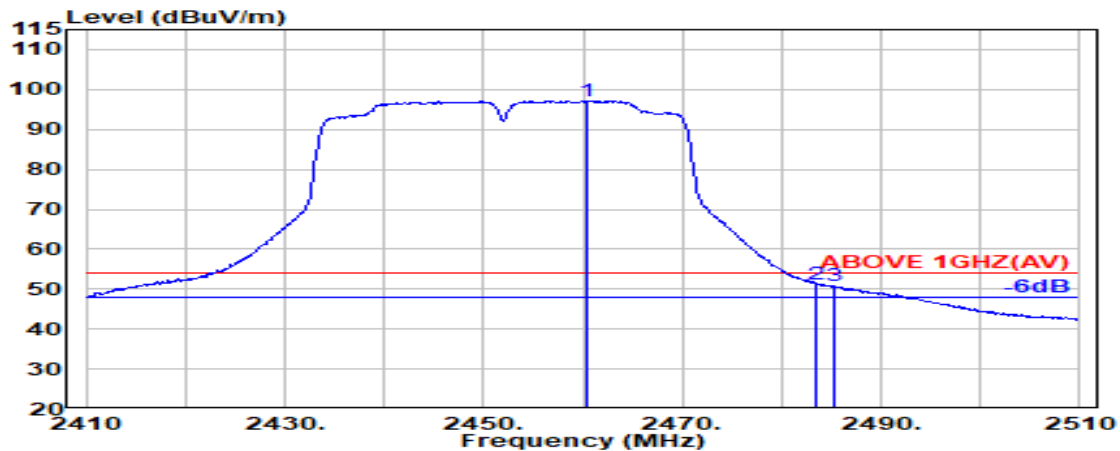


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	28.42	6.13	34.52	97.10	97.14	---	---	Average
2483.500	28.47	6.17	34.53	51.24	51.35	54.00	2.65	Average
2485.200	28.47	6.17	34.53	50.84	50.95	54.00	3.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

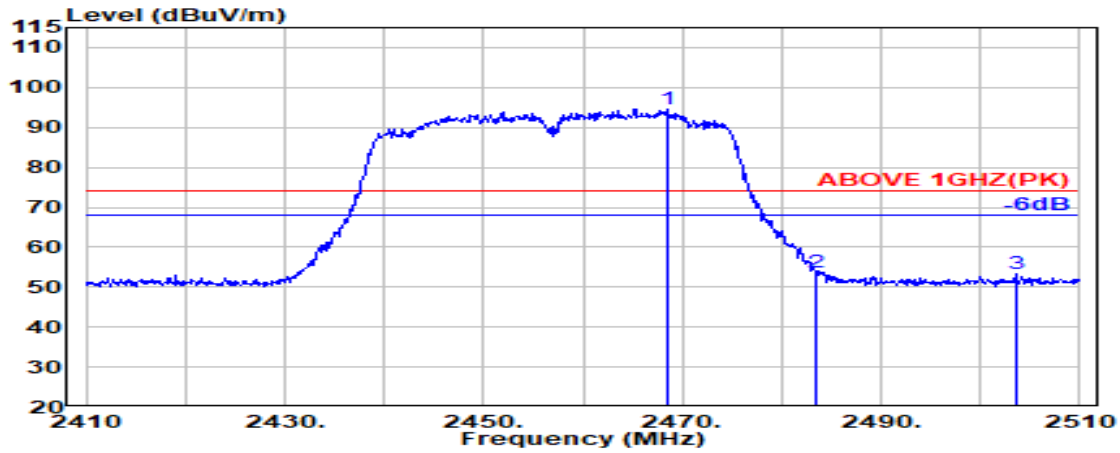

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.44	6.15	34.52	94.54	94.60	---	---	Peak
2483.500	28.47	6.17	34.53	53.68	53.79	74.00	20.21	Peak
2503.500	28.52	6.19	34.53	53.07	53.25	74.00	20.75	Peak

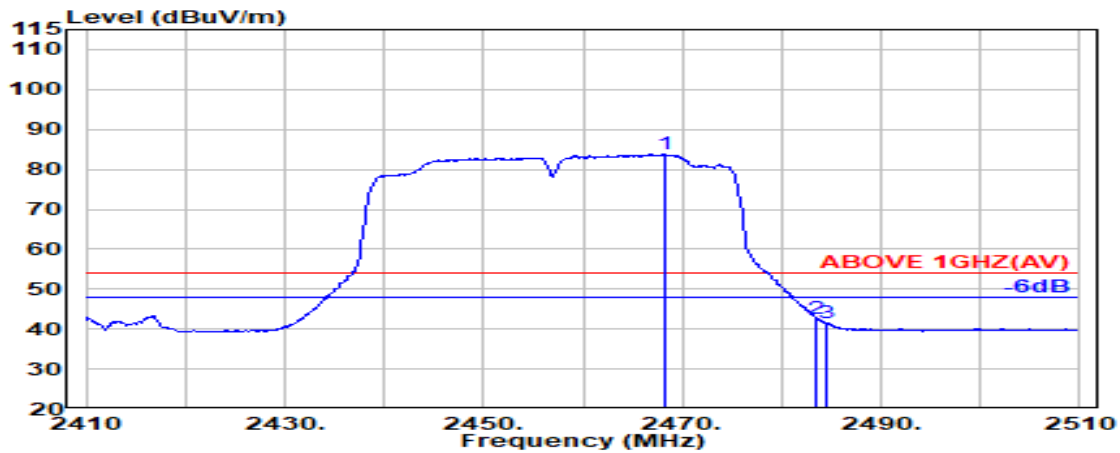


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	6.15	34.52	83.63	83.69	---	---	Average
2483.500	28.47	6.17	34.53	42.55	42.66	54.00	11.34	Average
2484.500	28.47	6.17	34.53	41.36	41.47	54.00	12.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

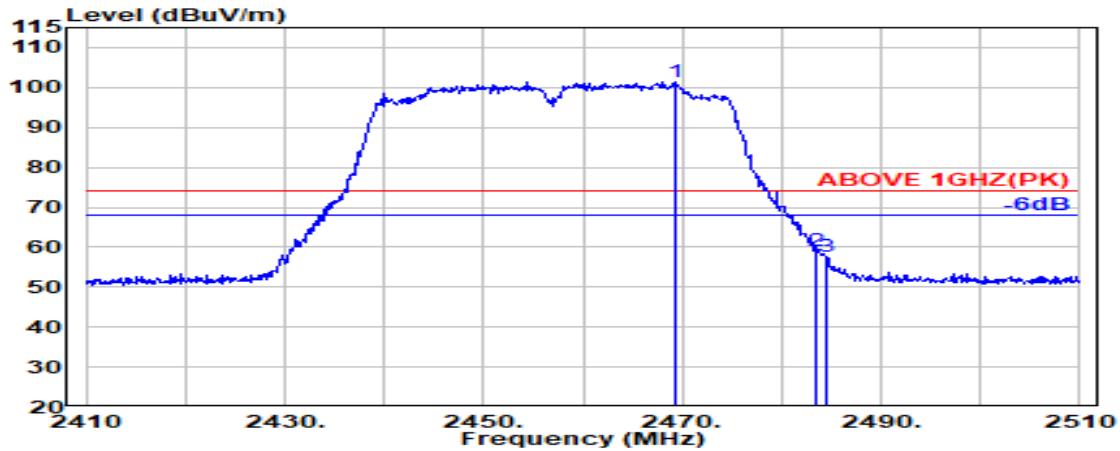

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.44	6.15	34.52	101.23	101.30	---	---	Peak
2483.500	28.47	6.17	34.53	58.79	58.90	74.00	15.10	Peak
2484.400	28.47	6.17	34.53	57.66	57.77	74.00	16.23	Peak

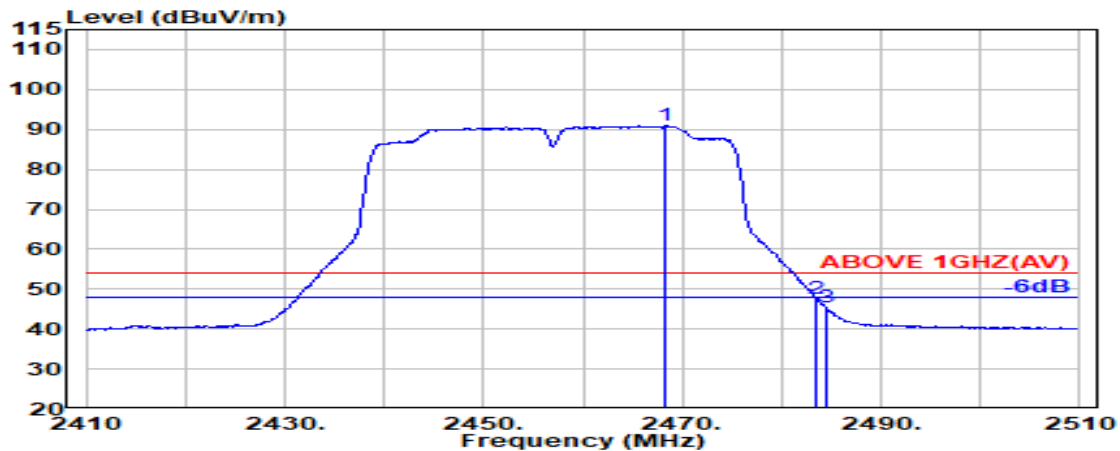


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	28.44	6.15	34.52	90.84	90.89	---	---	Average
2483.500	28.47	6.17	34.53	47.67	47.78	54.00	6.22	Average
2484.400	28.47	6.17	34.53	45.42	45.53	54.00	8.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

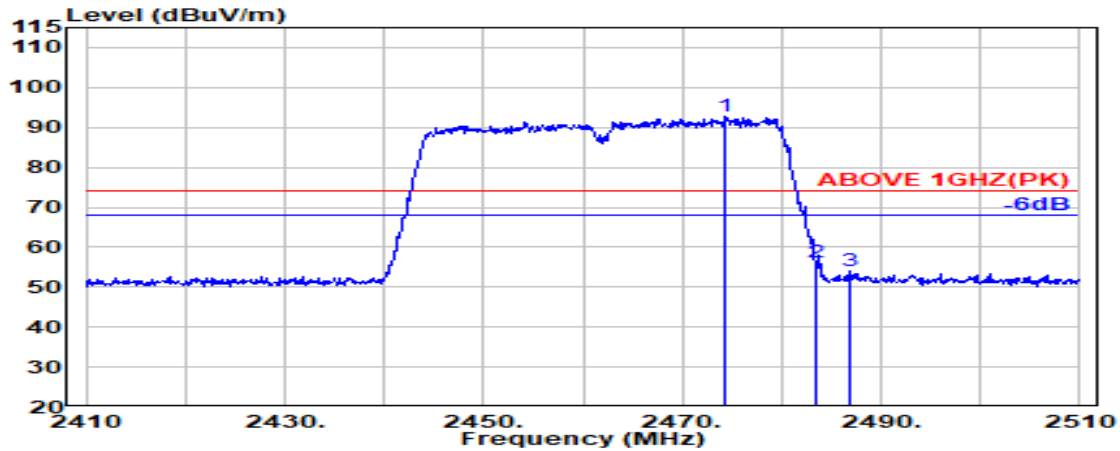

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.200	28.45	6.15	34.52	92.53	92.61	---	---	Peak
2483.500	28.47	6.17	34.53	55.93	56.04	74.00	17.96	Peak
2486.900	28.47	6.17	34.53	53.95	54.07	74.00	19.93	Peak

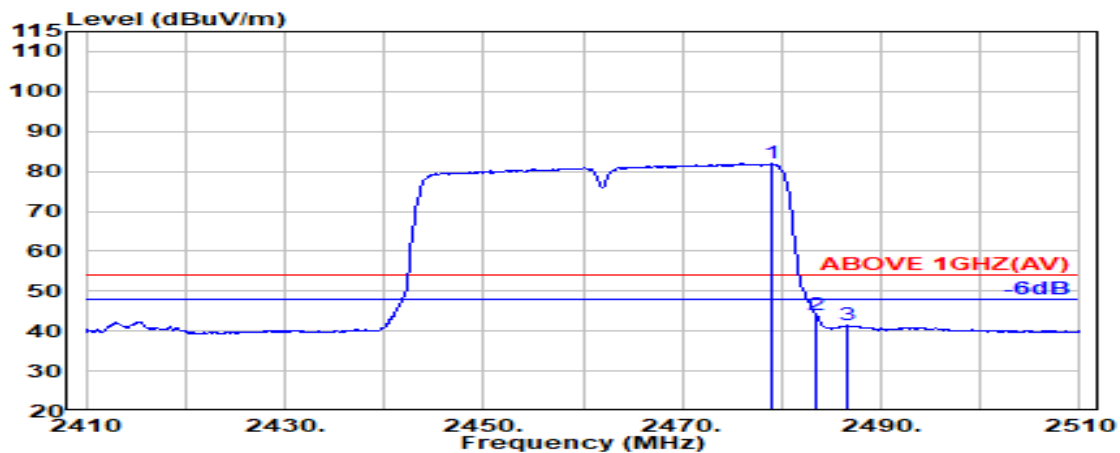


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.46	6.16	34.53	81.85	81.95	---	---	Average
2483.500	28.47	6.17	34.53	43.77	43.87	54.00	10.13	Average
2486.700	28.47	6.17	34.53	41.27	41.39	54.00	12.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

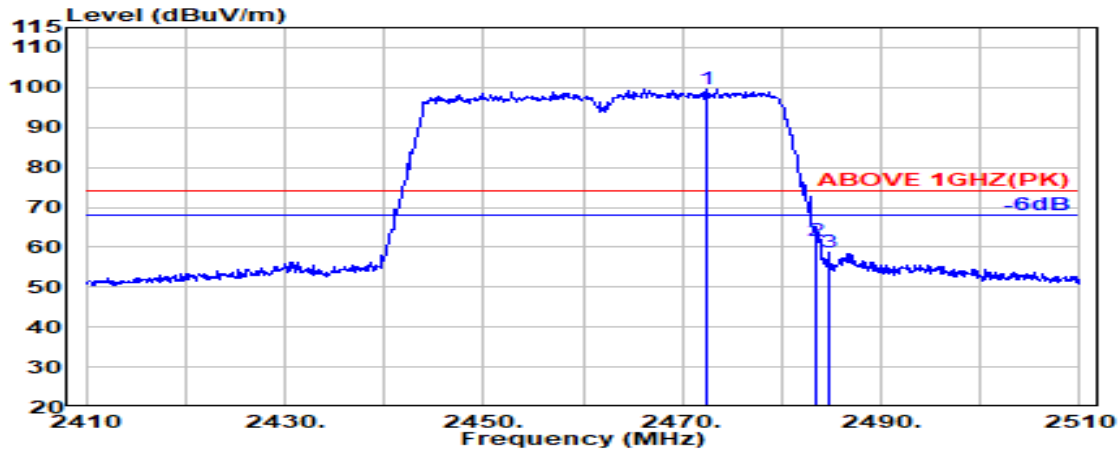

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.500	28.45	6.15	34.52	99.55	99.62	---	---	Peak
2483.500	28.47	6.17	34.53	61.43	61.54	74.00	12.46	Peak
2484.700	28.47	6.17	34.53	58.70	58.81	74.00	15.19	Peak

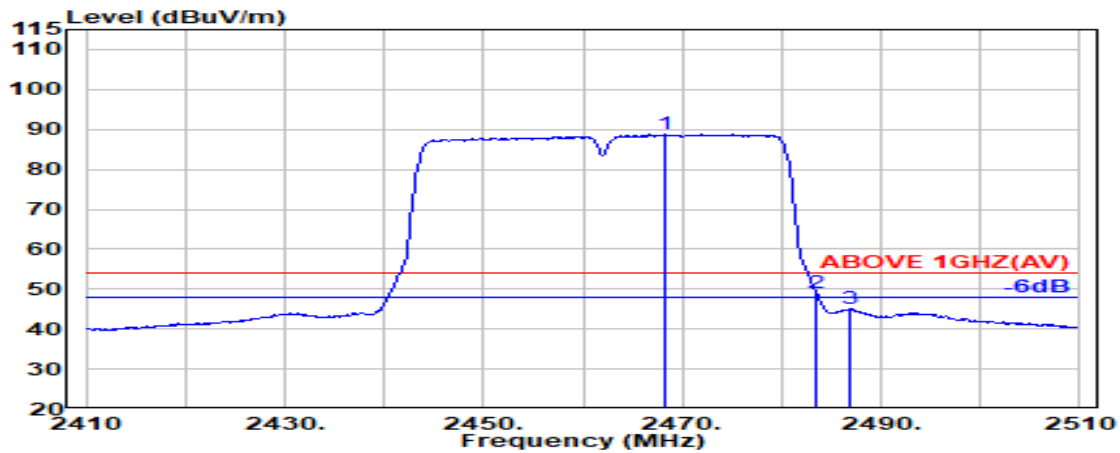


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	28.44	6.15	34.52	88.69	88.75	---	---	Average
2483.500	28.47	6.17	34.53	48.86	48.97	54.00	5.03	Average
2486.900	28.47	6.17	34.53	44.86	44.98	54.00	9.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

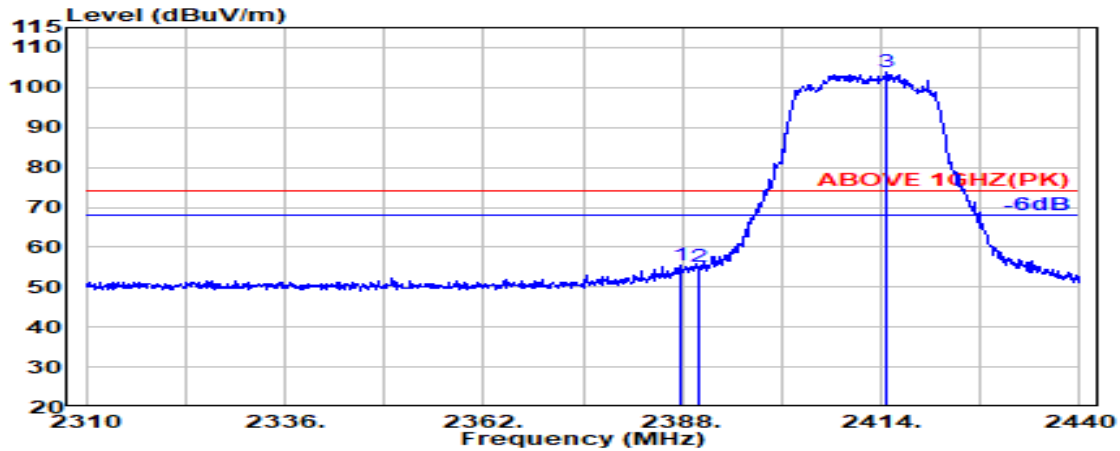

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.800	28.20	6.03	34.51	55.63	55.35	74.00	18.65	Peak
2390.000	28.18	6.03	34.51	55.43	55.14	74.00	18.86	Peak
@ 2414.700	28.19	6.07	34.51	104.06	103.81	---	---	Peak

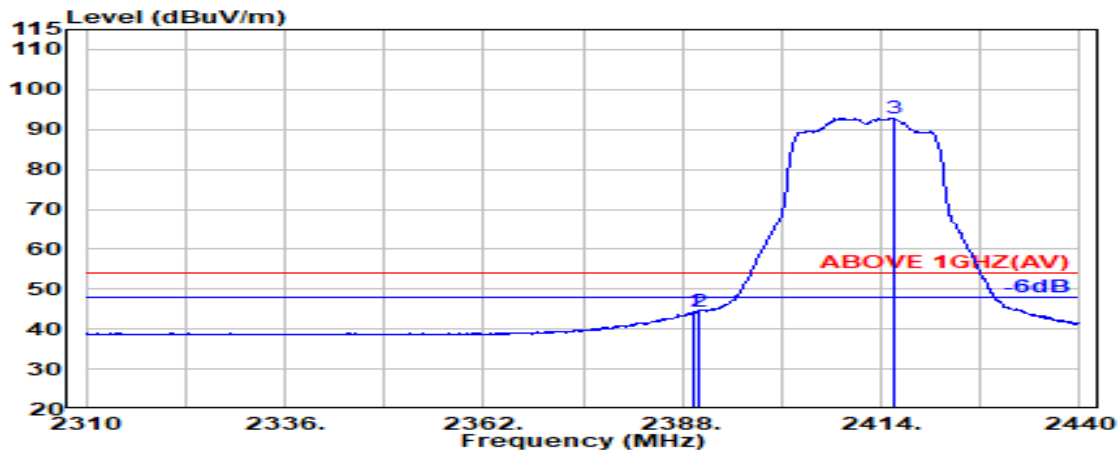


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	44.53	44.24	54.00	9.76	Average
2390.000	28.18	6.03	34.51	44.57	44.28	54.00	9.72	Average
@ 2415.800	28.20	6.07	34.51	93.10	92.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

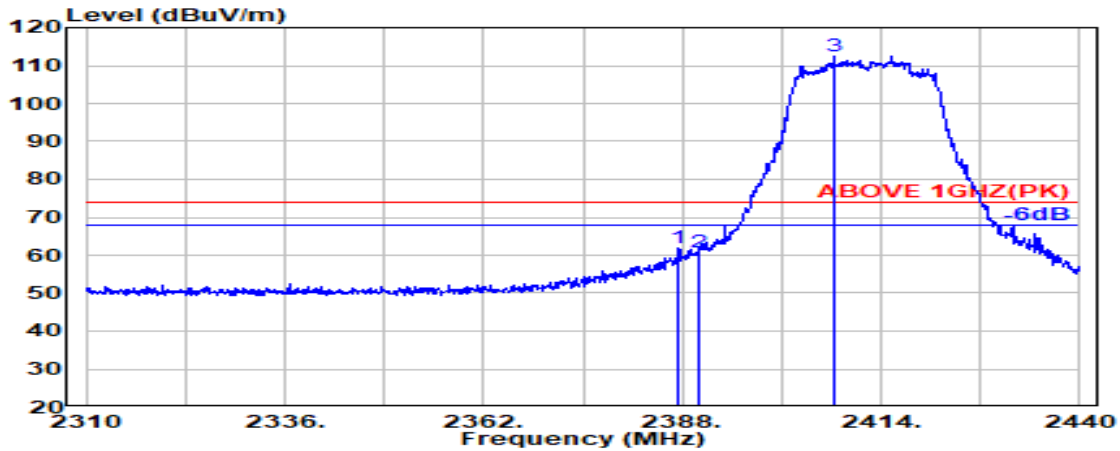

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	28.20	6.03	34.51	62.19	61.92	74.00	12.08	Peak
2390.000	28.18	6.03	34.51	61.10	60.81	74.00	13.19	Peak
@ 2407.800	28.15	6.06	34.51	112.69	112.38	---	---	Peak

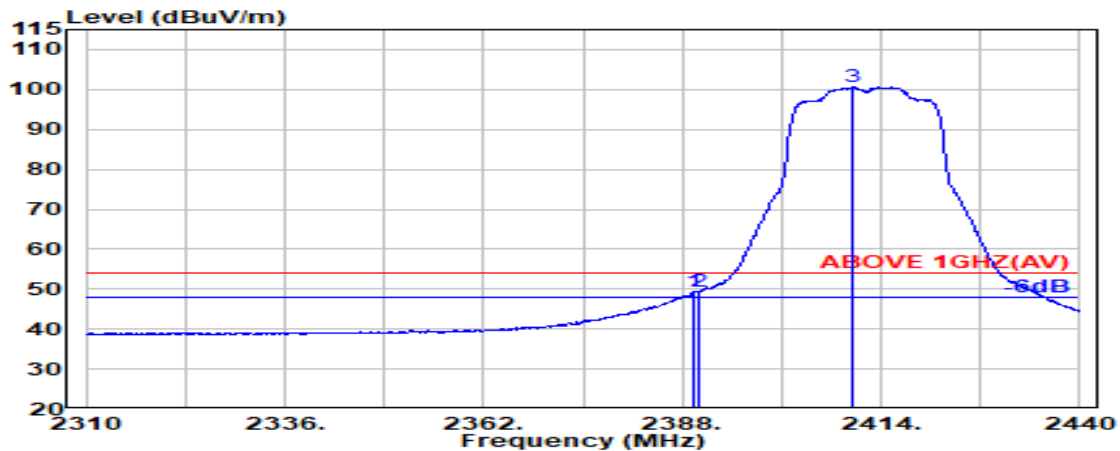


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	49.71	49.42	54.00	4.58	Average
2390.000	28.18	6.03	34.51	49.75	49.46	54.00	4.54	Average
@ 2410.400	28.16	6.06	34.51	100.94	100.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

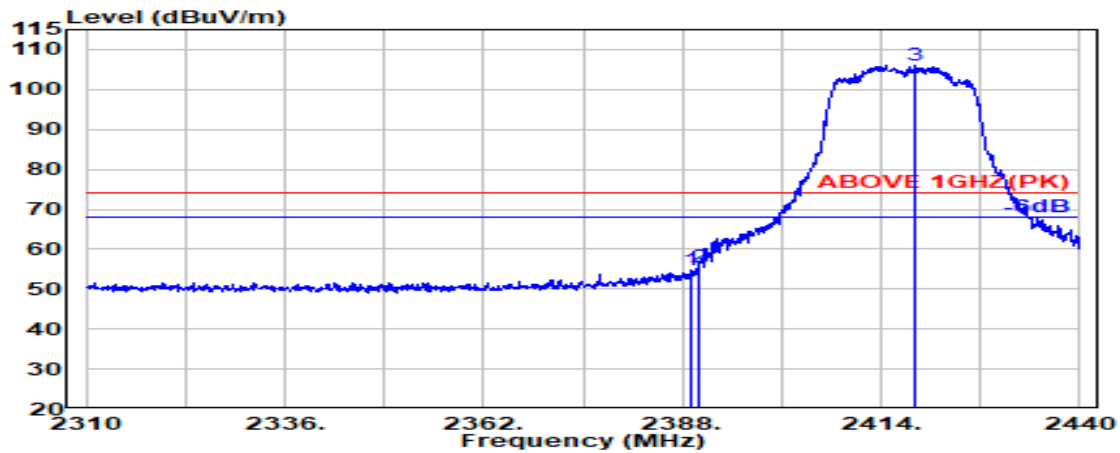

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.51	55.02	54.73	74.00	19.27	Peak
2390.000	28.18	6.03	34.51	55.84	55.54	74.00	18.46	Peak
@ 2418.500	28.21	6.08	34.51	106.40	106.18	---	---	Peak

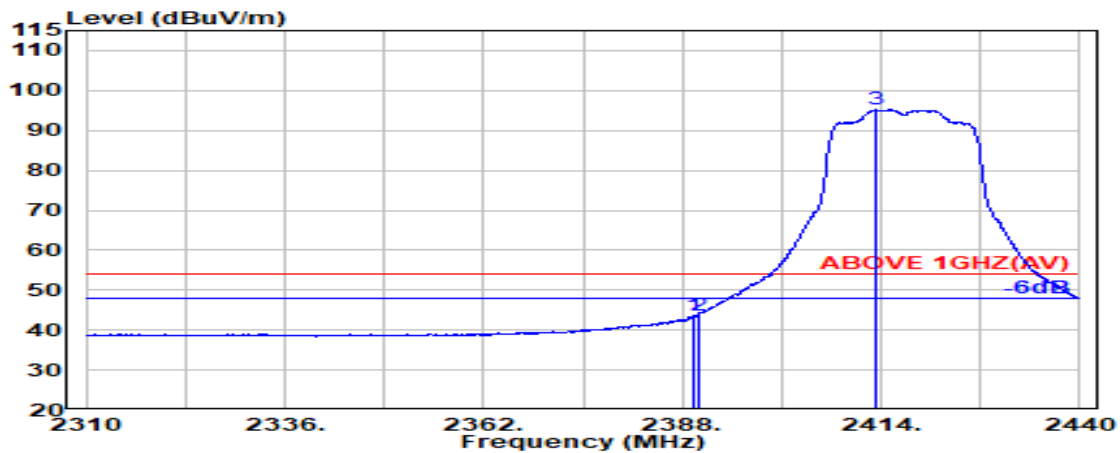


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	43.79	43.50	54.00	10.50	Average
2390.000	28.18	6.03	34.51	43.95	43.66	54.00	10.34	Average
@ 2413.200	28.18	6.07	34.51	95.51	95.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

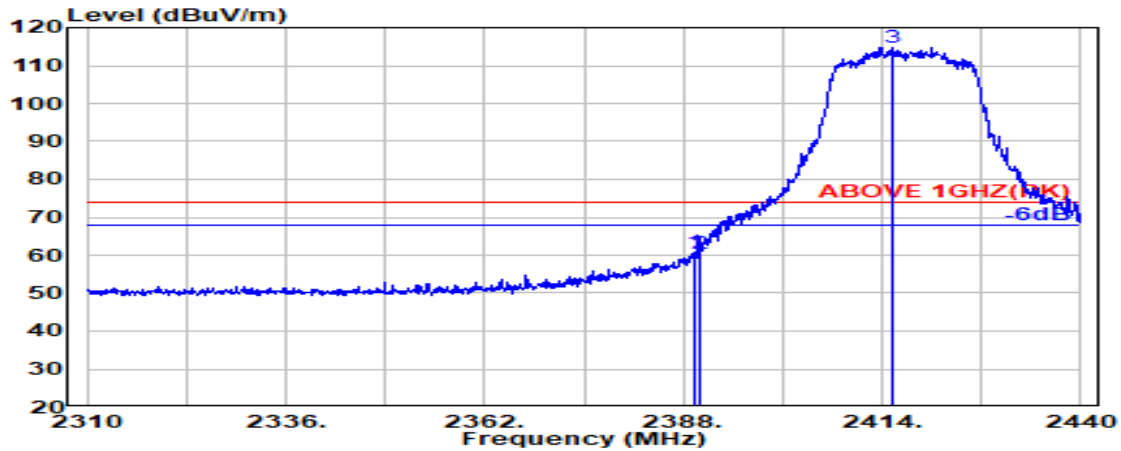

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	61.13	60.84	74.00	13.16	Peak
2390.000	28.18	6.03	34.51	60.82	60.52	74.00	13.48	Peak
@ 2415.400	28.19	6.07	34.51	115.12	114.87	---	---	Peak

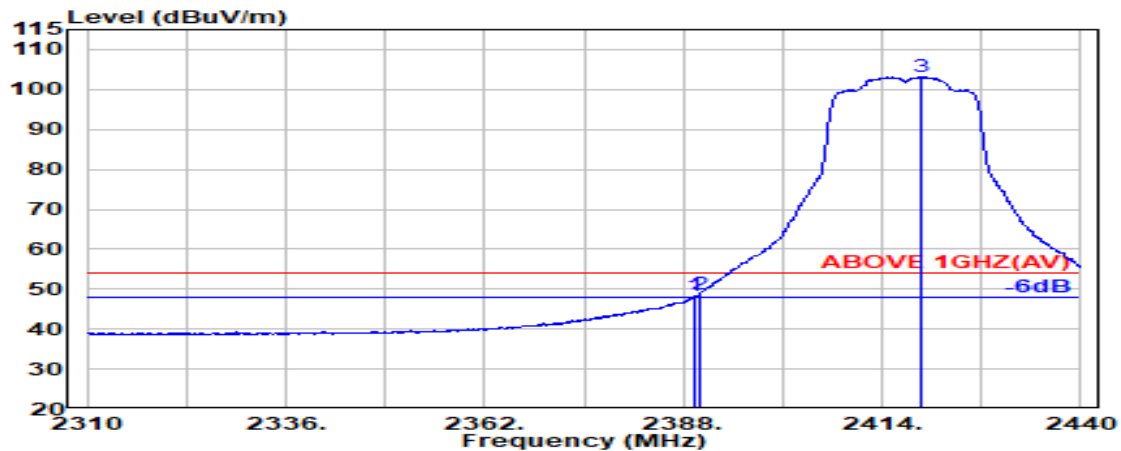

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	48.61	48.32	54.00	5.68	Average
2390.000	28.18	6.03	34.51	48.91	48.62	54.00	5.38	Average
@ 2419.000	28.21	6.08	34.51	103.39	103.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.300	28.42	6.13	34.52	108.27	108.31	---	---	Peak
2483.500	28.47	6.17	34.53	59.75	59.86	74.00	14.14	Peak
2485.000	28.47	6.17	34.53	57.37	57.48	74.00	16.52	Peak

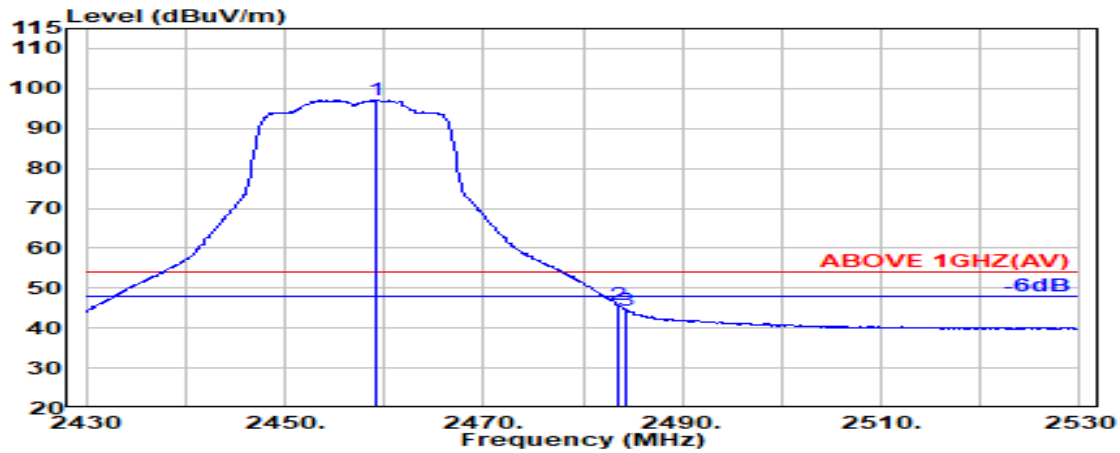


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.100	28.42	6.13	34.52	96.97	97.00	---	---	Average
2483.500	28.47	6.17	34.53	45.68	45.78	54.00	8.22	Average
2484.400	28.47	6.17	34.53	44.39	44.50	54.00	9.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

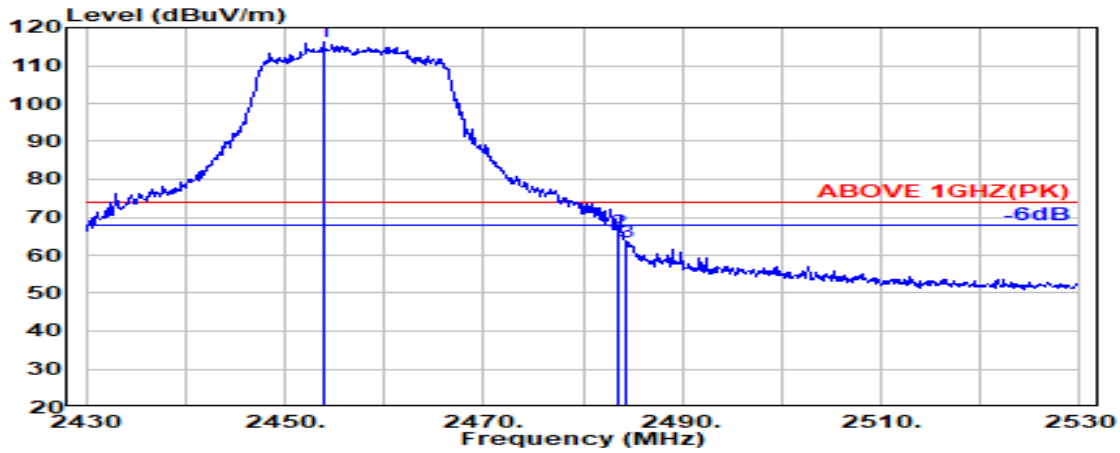

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.900	28.41	6.13	34.52	116.05	116.06	---	---	Peak
2483.500	28.47	6.17	34.53	65.94	66.05	74.00	7.95	Peak
2484.400	28.47	6.17	34.53	63.35	63.46	74.00	10.54	Peak

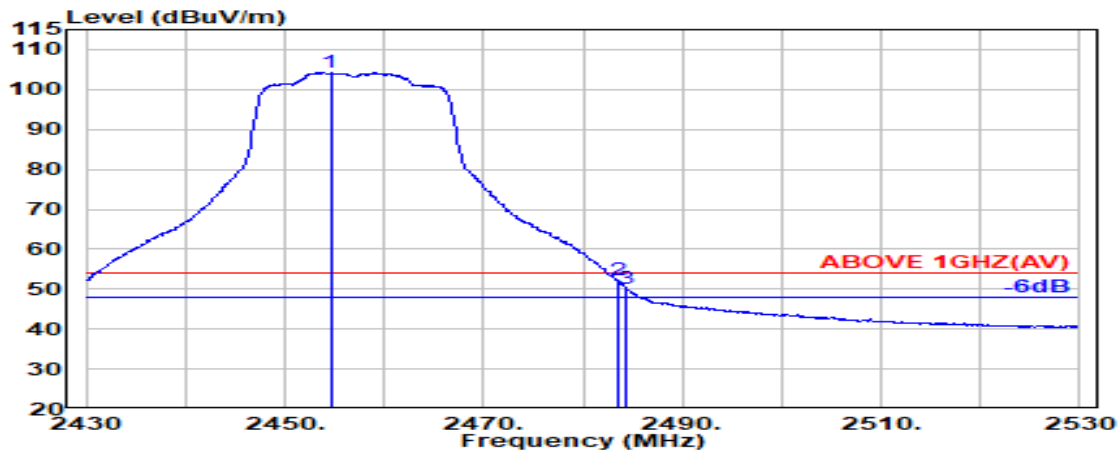


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.600	28.41	6.13	34.52	104.28	104.29	---	---	Average
2483.500	28.47	6.17	34.53	52.12	52.23	54.00	1.77	Average
2484.400	28.47	6.17	34.53	49.95	50.06	54.00	3.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

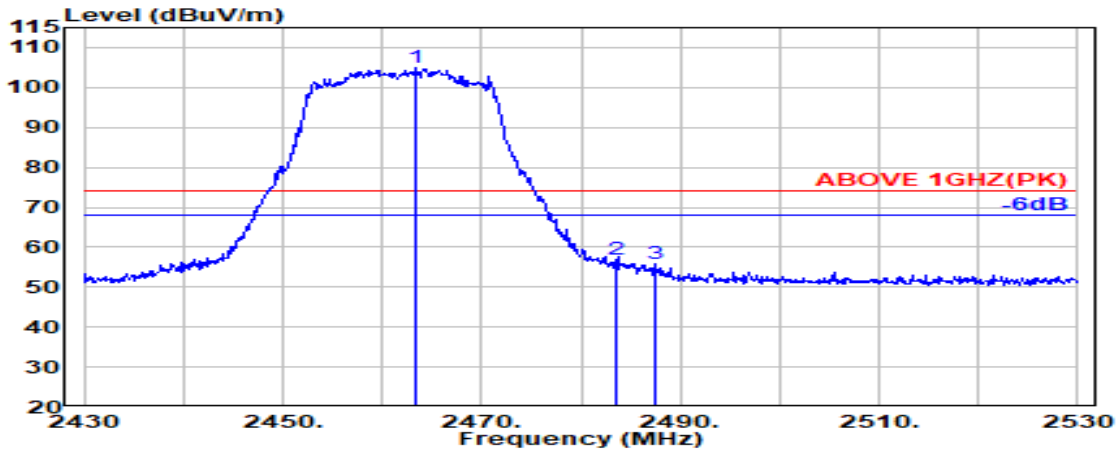

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.43	6.14	34.52	104.97	105.01	---	---	Peak
2483.500	28.47	6.17	34.53	56.85	56.96	74.00	17.04	Peak
2487.400	28.47	6.17	34.53	55.72	55.84	74.00	18.16	Peak

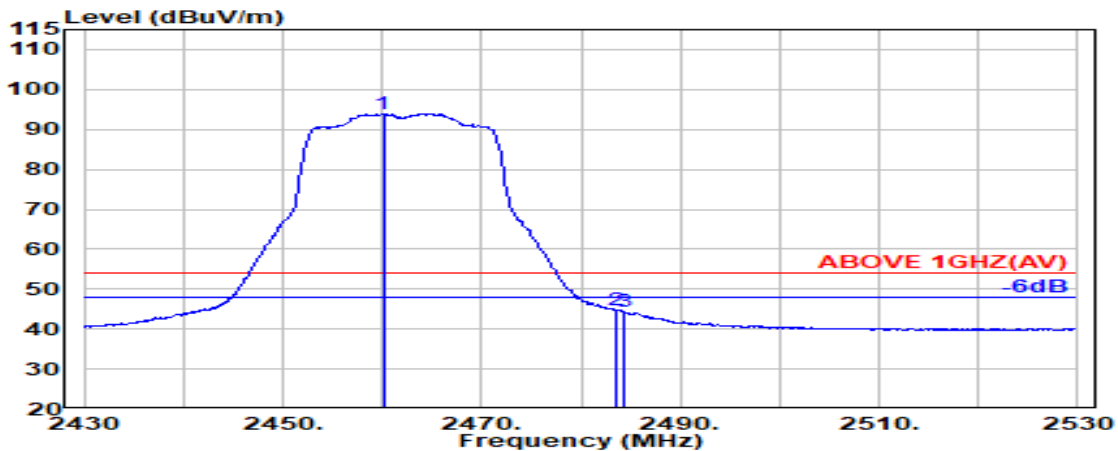


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.42	6.13	34.52	93.91	93.95	---	---	Average
2483.500	28.47	6.17	34.53	44.55	44.66	54.00	9.34	Average
2484.400	28.47	6.17	34.53	44.12	44.23	54.00	9.77	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

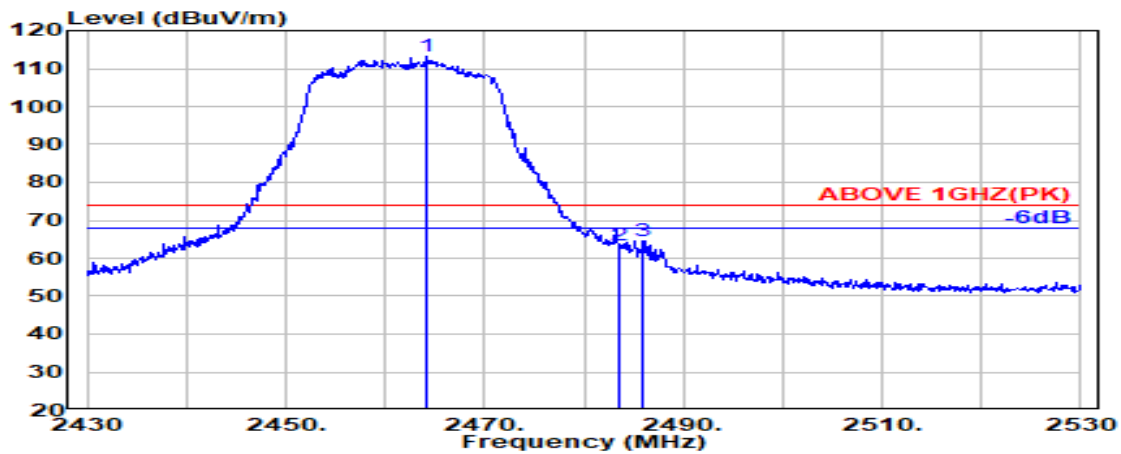

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	6.14	34.52	113.09	113.14	---	---	Peak
2483.500	28.47	6.17	34.53	63.32	63.43	74.00	10.57	Peak
2486.000	28.47	6.17	34.53	64.33	64.45	74.00	9.55	Peak

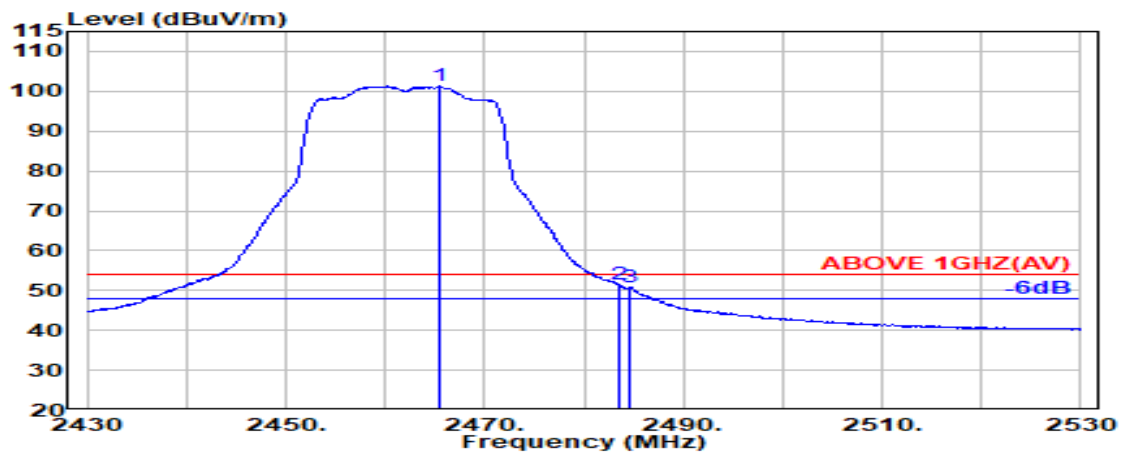


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.43	6.14	34.52	101.17	101.22	---	---	Average
2483.500	28.47	6.17	34.53	51.32	51.43	54.00	2.57	Average
2484.600	28.47	6.17	34.53	50.63	50.74	54.00	3.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

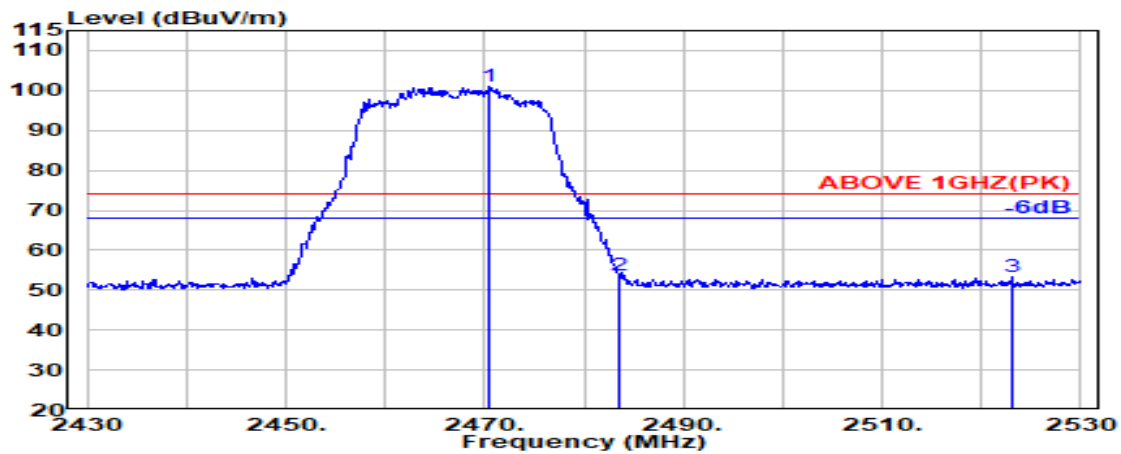

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	28.44	6.15	34.52	100.83	100.90	---	---	Peak
2483.500	28.47	6.17	34.53	53.71	53.82	74.00	20.18	Peak
2523.000	28.64	6.22	34.54	52.98	53.30	74.00	20.70	Peak

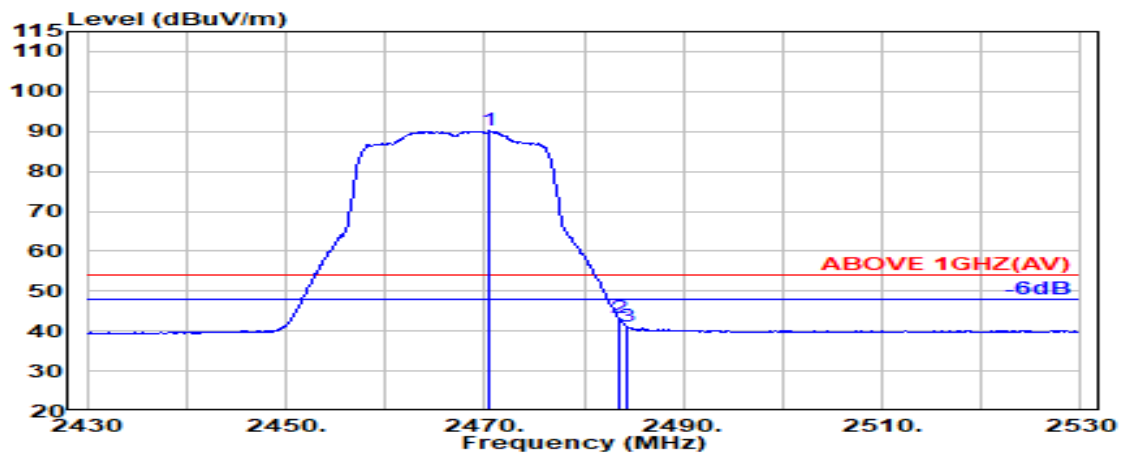


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	28.44	6.15	34.52	90.06	90.13	---	---	Average
2483.500	28.47	6.17	34.53	43.32	43.43	54.00	10.57	Average
2484.400	28.47	6.17	34.53	40.96	41.07	54.00	12.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

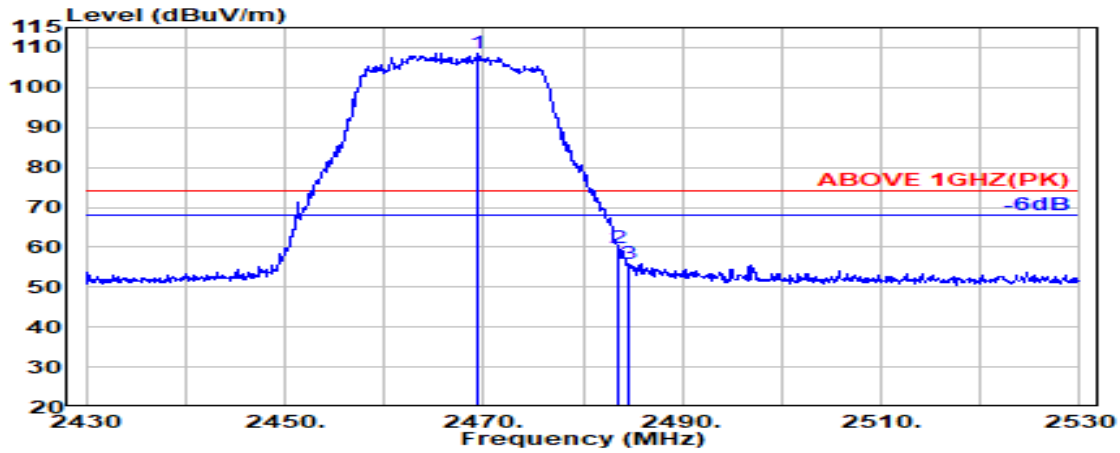

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.44	6.15	34.52	108.56	108.62	---	---	Peak
2483.500	28.47	6.17	34.53	59.74	59.84	74.00	14.16	Peak
2484.500	28.47	6.17	34.53	55.86	55.97	74.00	18.03	Peak

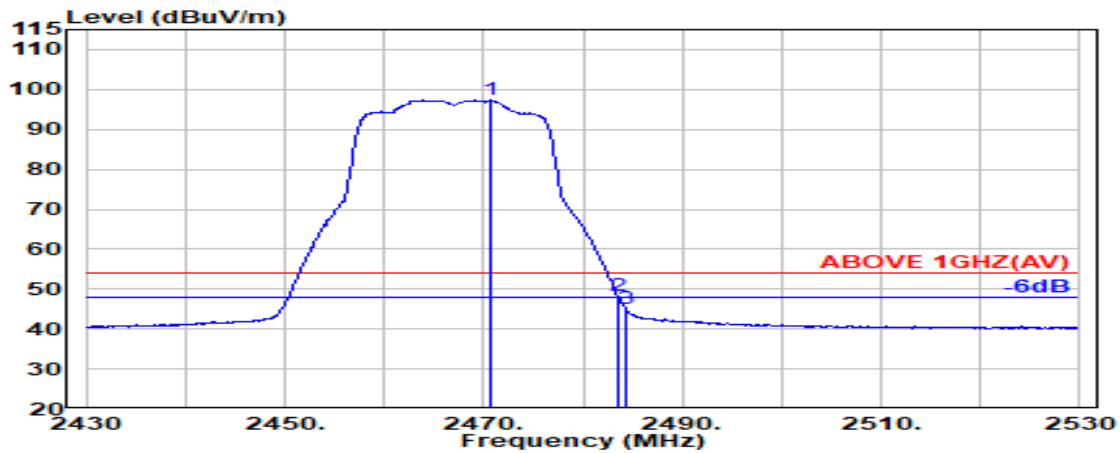


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.600	28.44	6.15	34.52	97.28	97.35	---	---	Average
2483.500	28.47	6.17	34.53	48.39	48.49	54.00	5.51	Average
2484.400	28.47	6.17	34.53	44.87	44.98	54.00	9.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

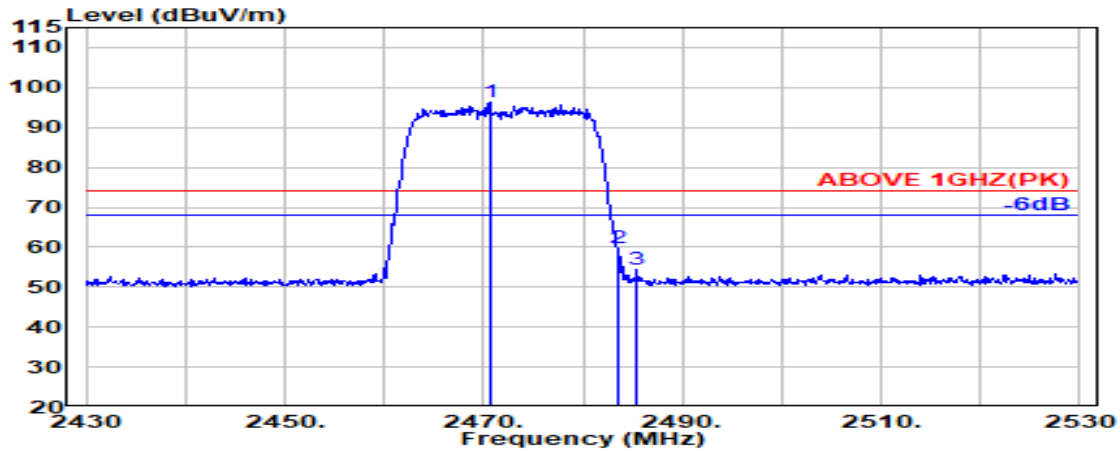

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.600	28.44	6.15	34.52	96.38	96.44	---	---	Peak
2483.500	28.47	6.17	34.53	59.79	59.90	74.00	14.10	Peak
2485.500	28.47	6.17	34.53	54.15	54.26	74.00	19.74	Peak

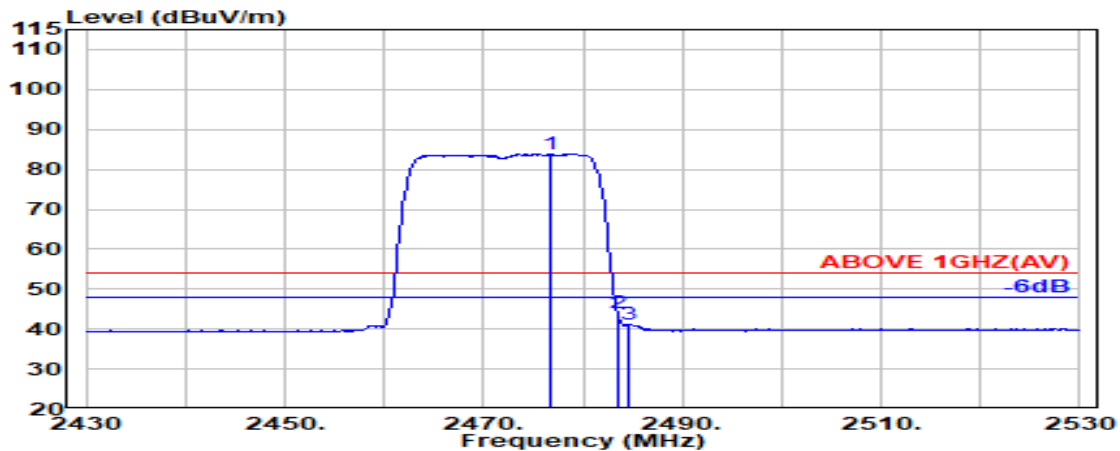


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.700	28.45	6.16	34.53	83.82	83.91	---	---	Average
2483.500	28.47	6.17	34.53	43.98	44.09	54.00	9.91	Average
2484.600	28.47	6.17	34.53	41.03	41.14	54.00	12.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

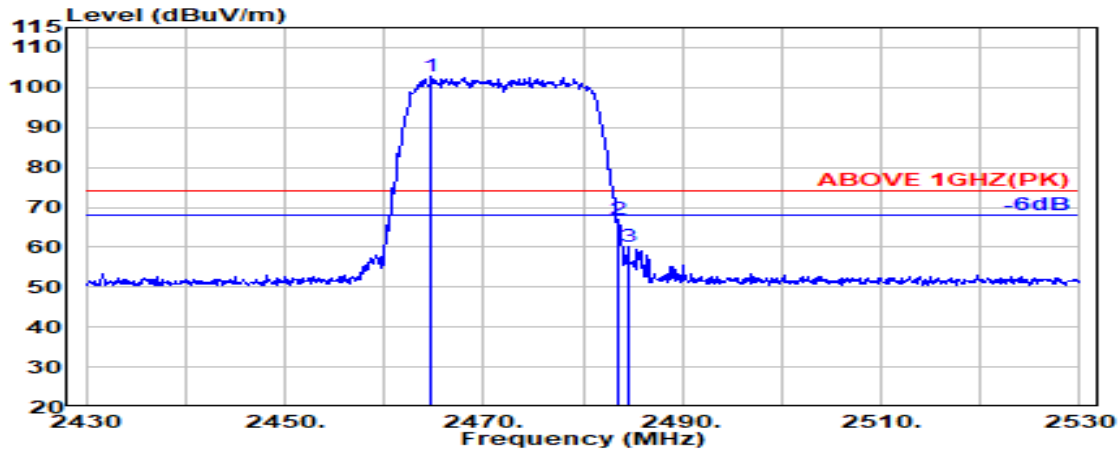

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.43	6.14	34.52	102.62	102.67	---	---	Peak
2483.500	28.47	6.17	34.53	66.73	66.83	74.00	7.17	Peak
2484.600	28.47	6.17	34.53	60.04	60.15	74.00	13.85	Peak




Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.43	6.14	34.52	91.28	91.32	---	---	Average
2483.500	28.47	6.17	34.53	49.27	49.38	54.00	4.62	Average
2484.900	28.47	6.17	34.53	44.53	44.64	54.00	9.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

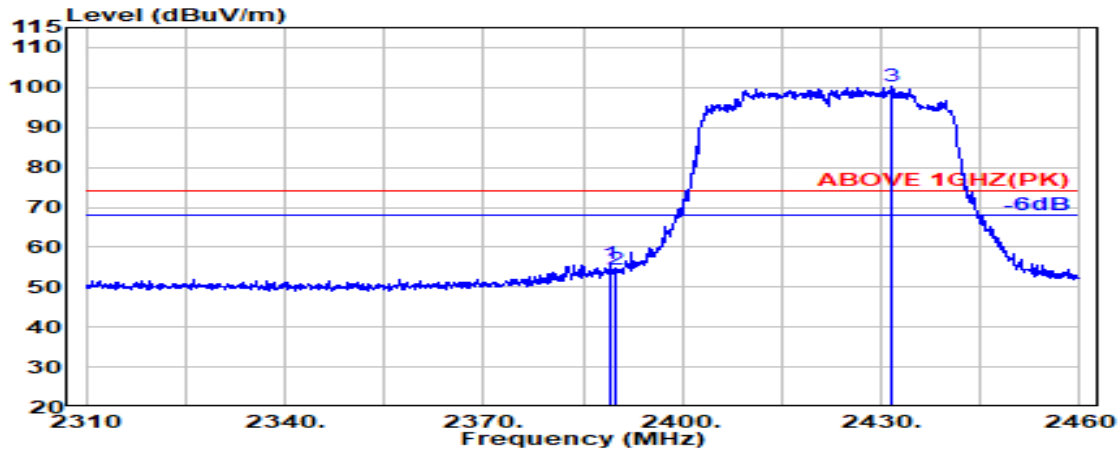

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.51	56.03	55.74	74.00	18.26	Peak
2390.000	28.18	6.03	34.51	54.83	54.53	74.00	19.47	Peak
@ 2431.700	28.29	6.09	34.52	100.28	100.15	---	---	Peak

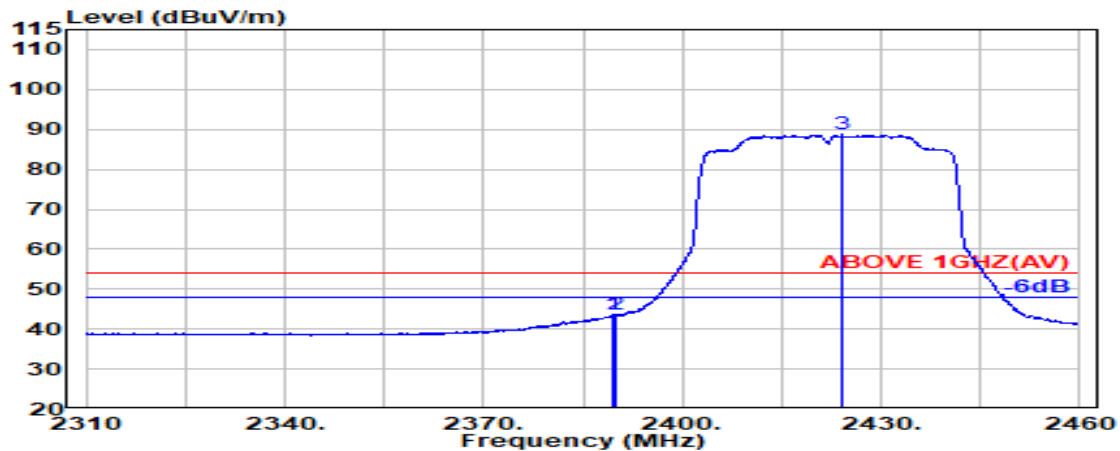


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	43.86	43.56	54.00	10.44	Average
2390.000	28.18	6.03	34.51	43.79	43.49	54.00	10.51	Average
@ 2424.100	28.25	6.08	34.51	88.88	88.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

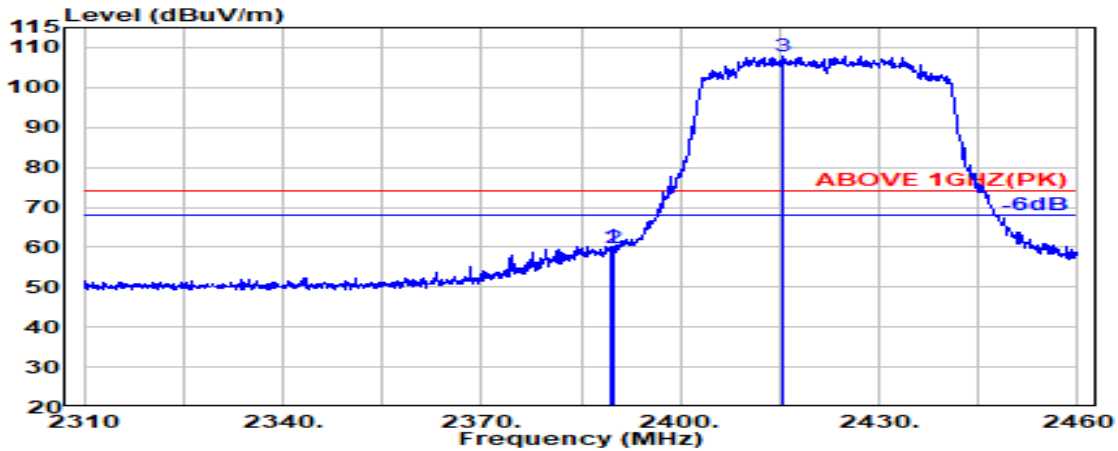

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	60.55	60.26	74.00	13.74	Peak
2390.000	28.18	6.03	34.51	60.14	59.85	74.00	14.15	Peak
@ 2415.400	28.19	6.07	34.51	108.21	107.96	---	---	Peak

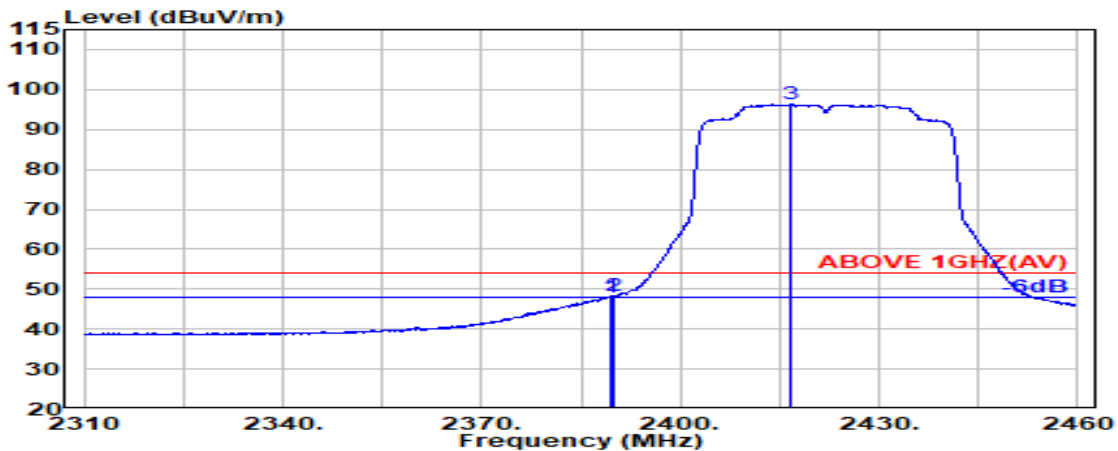


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	48.27	47.98	54.00	6.02	Average
2390.000	28.18	6.03	34.51	48.69	48.40	54.00	5.60	Average
@ 2416.700	28.20	6.07	34.51	96.52	96.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

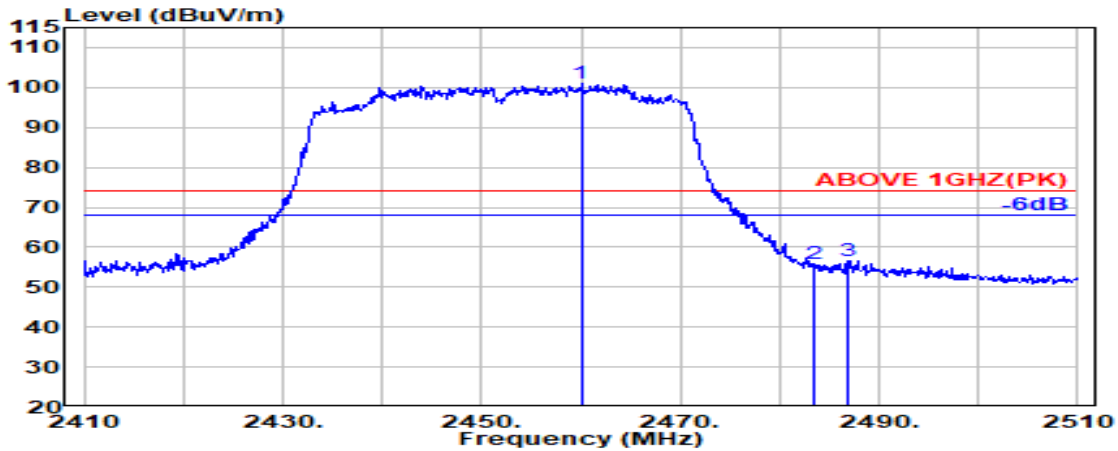

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	28.42	6.13	34.52	100.84	100.87	---	---	Peak
2483.500	28.47	6.17	34.53	55.75	55.86	74.00	18.14	Peak
2486.900	28.47	6.17	34.53	56.57	56.69	74.00	17.31	Peak

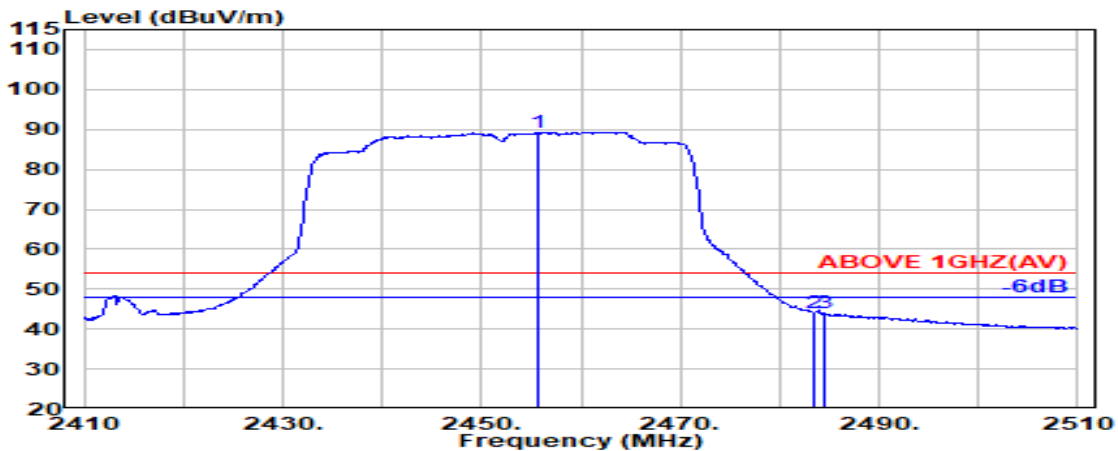


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.600	28.41	6.13	34.52	89.32	89.34	---	---	Average
2483.500	28.47	6.17	34.53	44.07	44.17	54.00	9.83	Average
2484.500	28.47	6.17	34.53	43.75	43.86	54.00	10.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

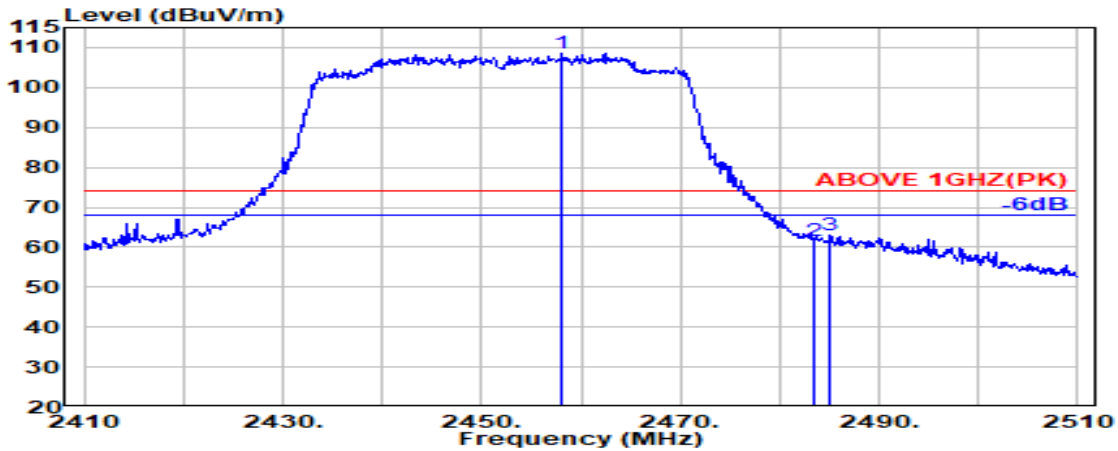

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.42	6.13	34.52	108.58	108.61	---	---	Peak
2483.500	28.47	6.17	34.53	61.57	61.68	74.00	12.32	Peak
2485.100	28.47	6.17	34.53	62.81	62.92	74.00	11.08	Peak

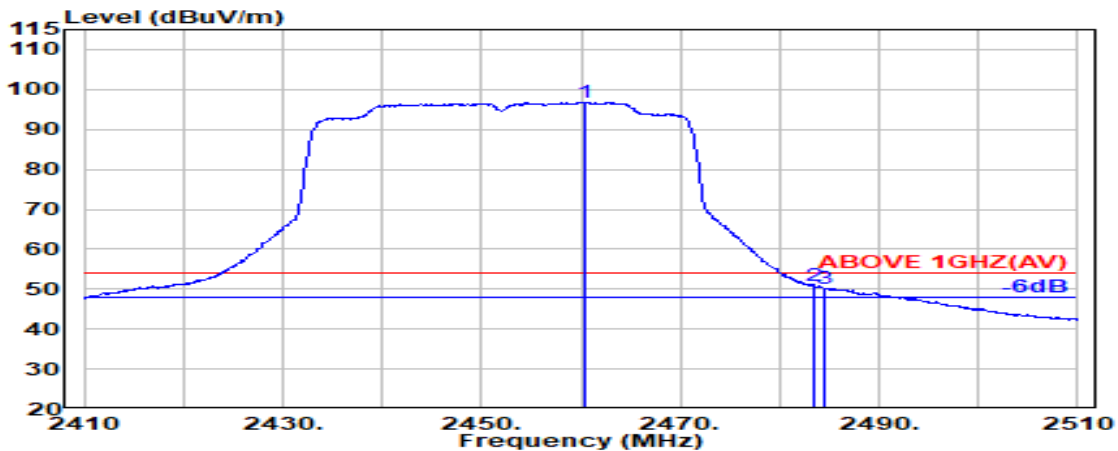


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.300	28.42	6.13	34.52	96.74	96.78	---	---	Average
2483.500	28.47	6.17	34.53	50.60	50.71	54.00	3.29	Average
2484.500	28.47	6.17	34.53	50.13	50.24	54.00	3.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

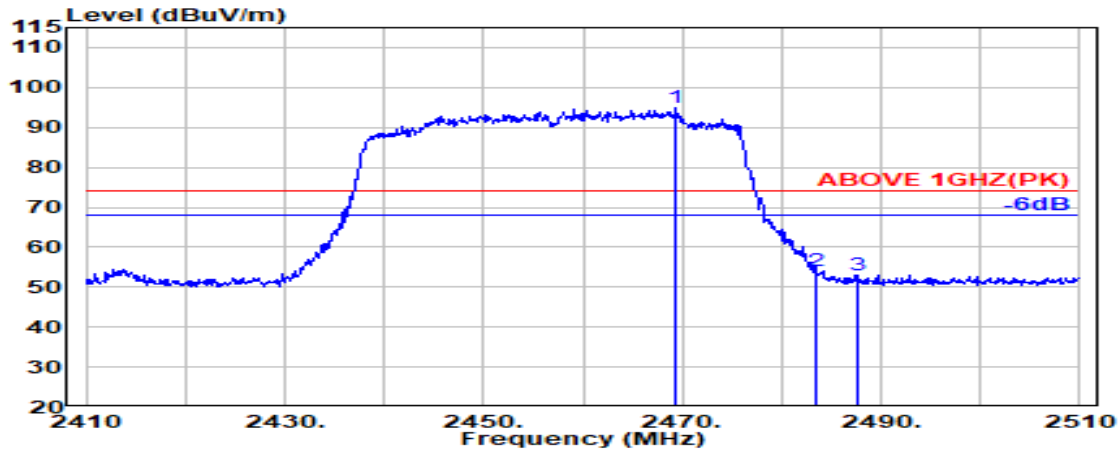

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.44	6.15	34.52	94.70	94.76	---	---	Peak
2483.500	28.47	6.17	34.53	53.85	53.96	74.00	20.04	Peak
2487.600	28.48	6.17	34.53	53.02	53.14	74.00	20.86	Peak

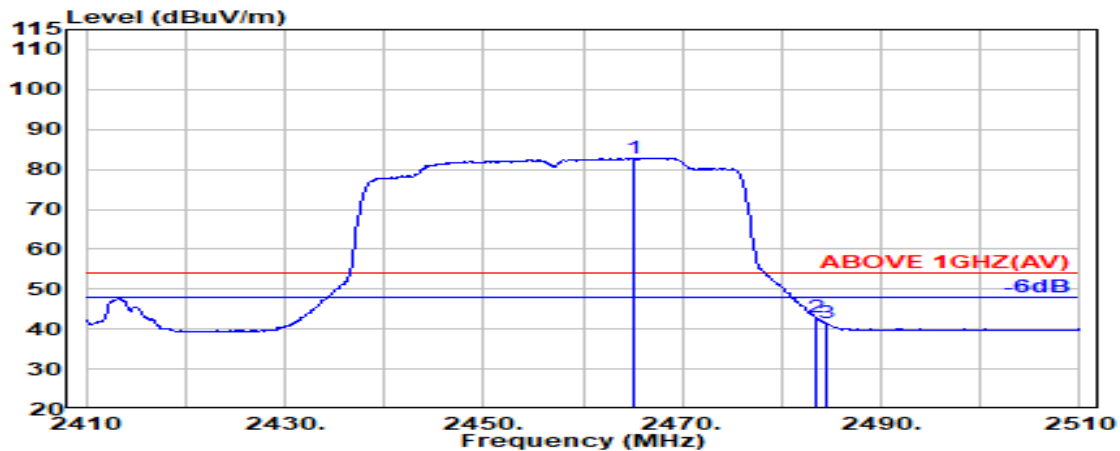


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.43	6.14	34.52	82.86	82.91	---	---	Average
2483.500	28.47	6.17	34.53	42.71	42.82	54.00	11.18	Average
2484.600	28.47	6.17	34.53	41.45	41.56	54.00	12.44	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

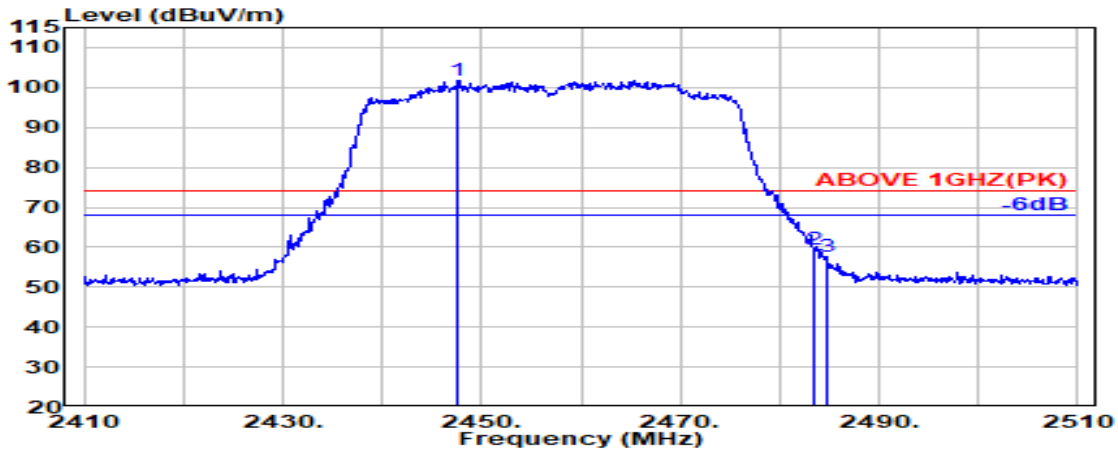

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.600	28.39	6.12	34.52	101.72	101.70	---	---	Peak
2483.500	28.47	6.17	34.53	59.21	59.32	74.00	14.68	Peak
2484.800	28.47	6.17	34.53	57.35	57.47	74.00	16.53	Peak

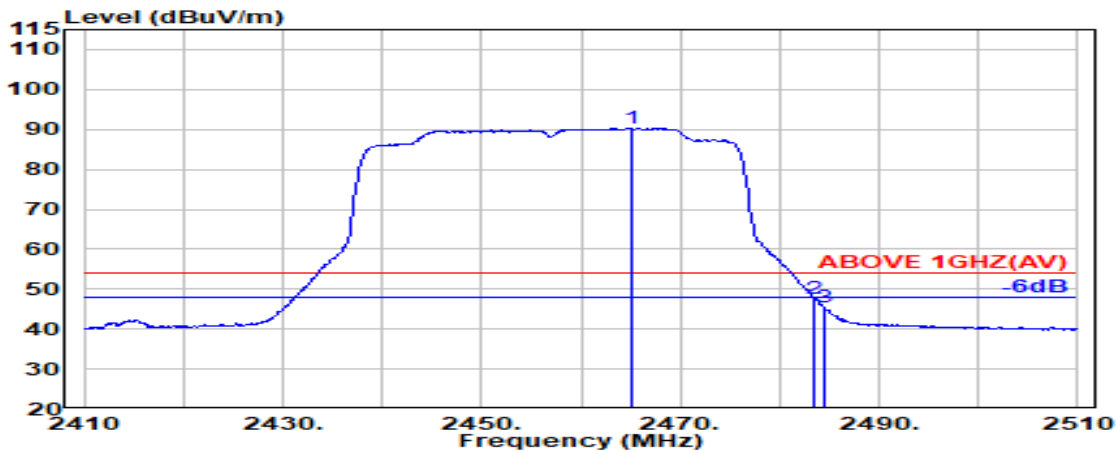


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.43	6.14	34.52	90.23	90.28	---	---	Average
2483.500	28.47	6.17	34.53	47.52	47.63	54.00	6.37	Average
2484.400	28.47	6.17	34.53	45.34	45.45	54.00	8.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

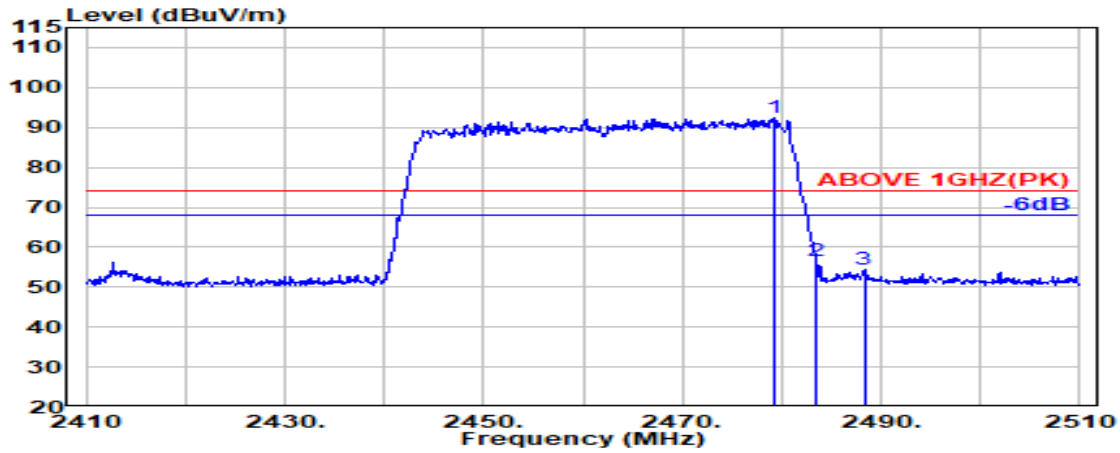

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.46	6.16	34.53	92.17	92.27	---	---	Peak
2483.500	28.47	6.17	34.53	56.43	56.54	74.00	17.46	Peak
2488.300	28.48	6.17	34.53	54.15	54.28	74.00	19.72	Peak

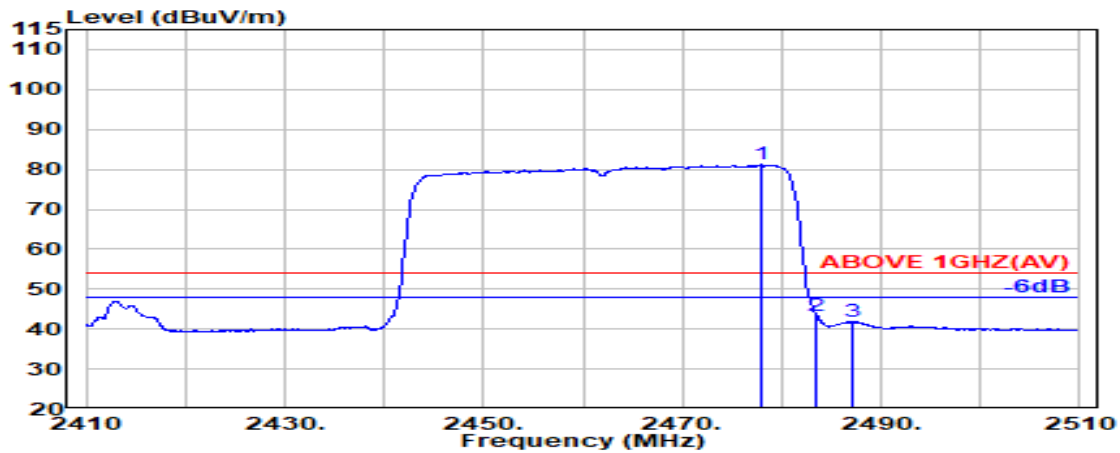


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.900	28.46	6.16	34.53	81.05	81.14	---	---	Average
2483.500	28.47	6.17	34.53	43.29	43.40	54.00	10.60	Average
2487.000	28.47	6.17	34.53	41.74	41.86	54.00	12.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

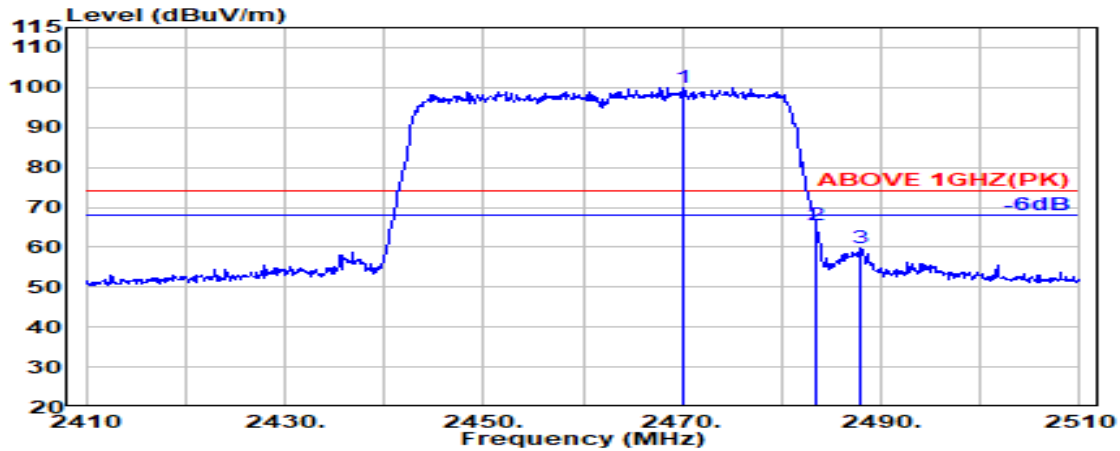

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.200	28.44	6.15	34.52	99.94	100.01	---	---	Peak
2483.500	28.47	6.17	34.53	65.59	65.70	74.00	8.30	Peak
2488.000	28.48	6.17	34.53	59.79	59.91	74.00	14.09	Peak

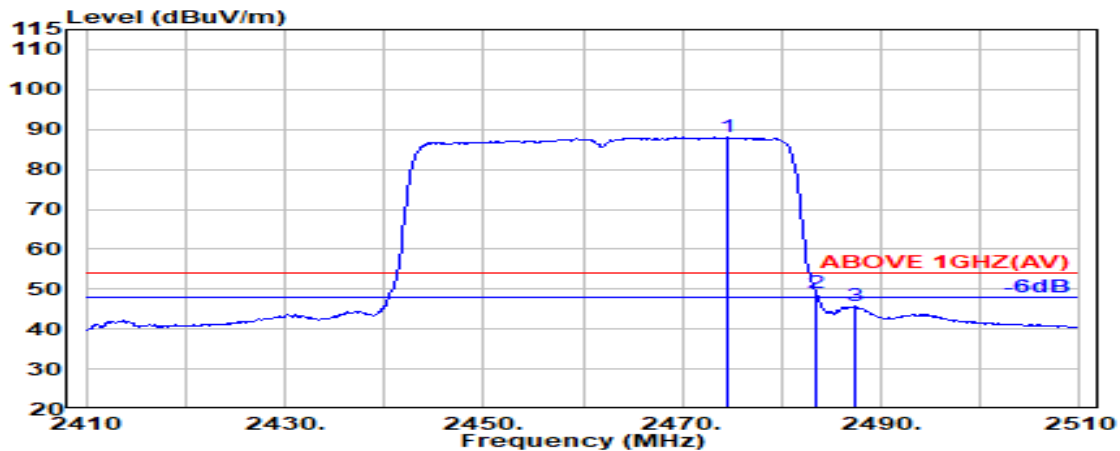


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.500	28.45	6.15	34.52	87.99	88.07	---	---	Average
2483.500	28.47	6.17	34.53	48.89	48.99	54.00	5.01	Average
2487.500	28.48	6.17	34.53	45.65	45.77	54.00	8.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

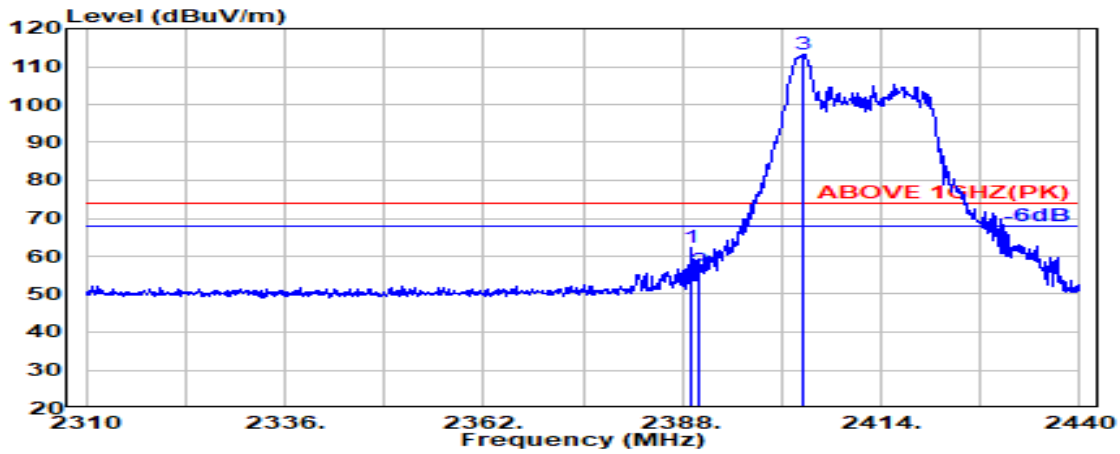

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.51	62.70	62.41	74.00	11.59	Peak
2390.000	28.18	6.03	34.51	56.59	56.29	74.00	17.71	Peak
@ 2403.900	28.12	6.05	34.51	113.59	113.26	---	---	Peak

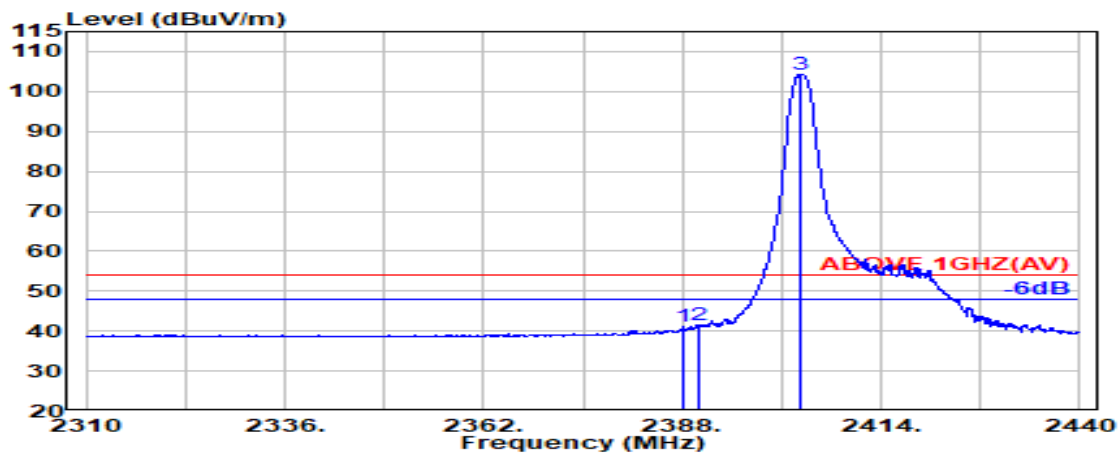


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	6.03	34.51	41.42	41.14	54.00	12.86	Average
2390.000	28.18	6.03	34.51	41.68	41.39	54.00	12.61	Average
@ 2403.400	28.12	6.05	34.51	104.67	104.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

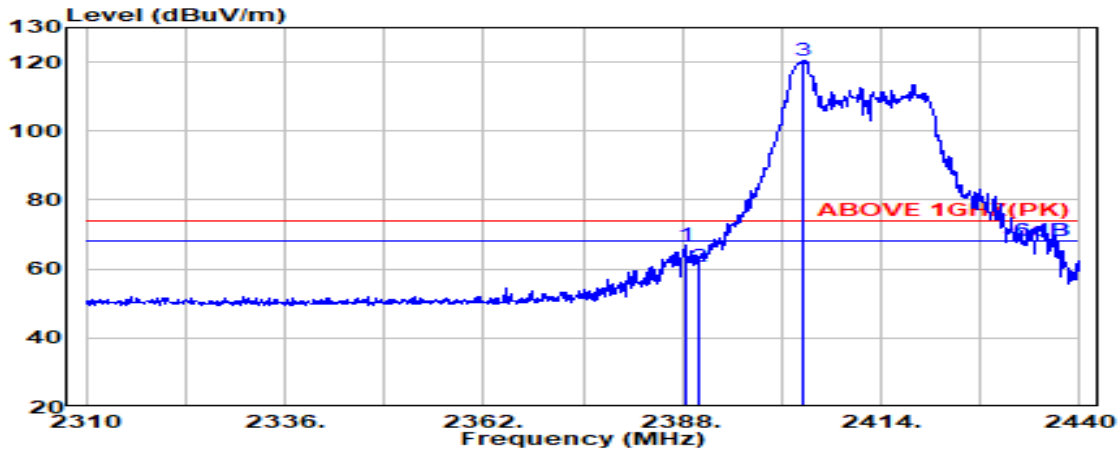

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.19	6.03	34.51	67.11	66.82	74.00	7.18	Peak
2390.000	28.18	6.03	34.51	61.11	60.82	74.00	13.18	Peak
@ 2403.900	28.12	6.05	34.51	120.84	120.51	---	---	Peak

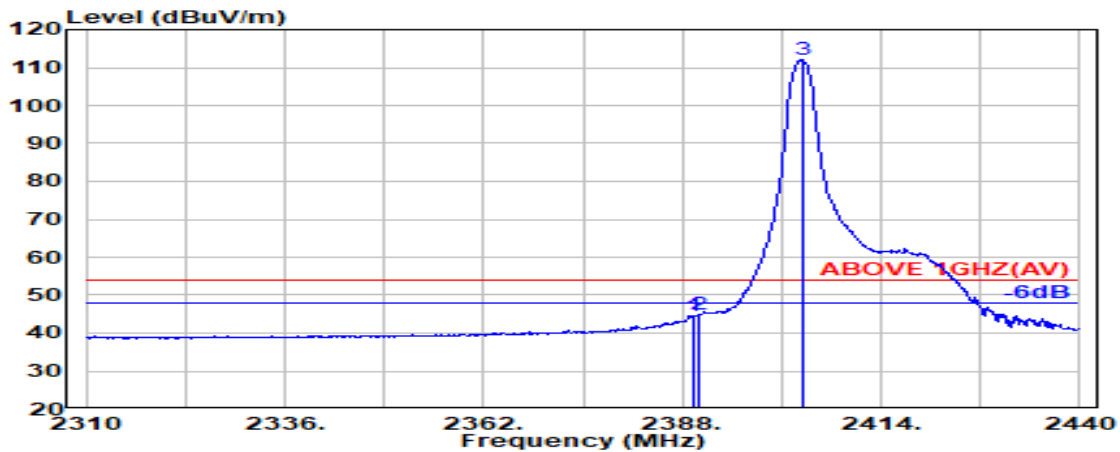


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.51	45.00	44.71	54.00	9.29	Average
2390.000	28.18	6.03	34.51	45.03	44.74	54.00	9.26	Average
@ 2403.900	28.12	6.05	34.51	112.38	112.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

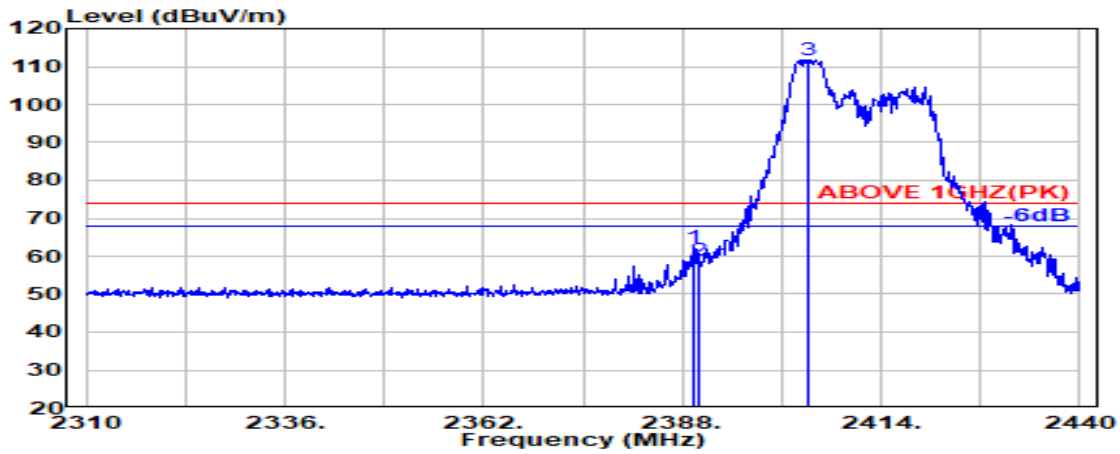

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	62.50	62.21	74.00	11.79	Peak
2390.000	28.18	6.03	34.51	59.25	58.96	74.00	15.04	Peak
@ 2404.500	28.13	6.06	34.51	112.20	111.88	---	---	Peak

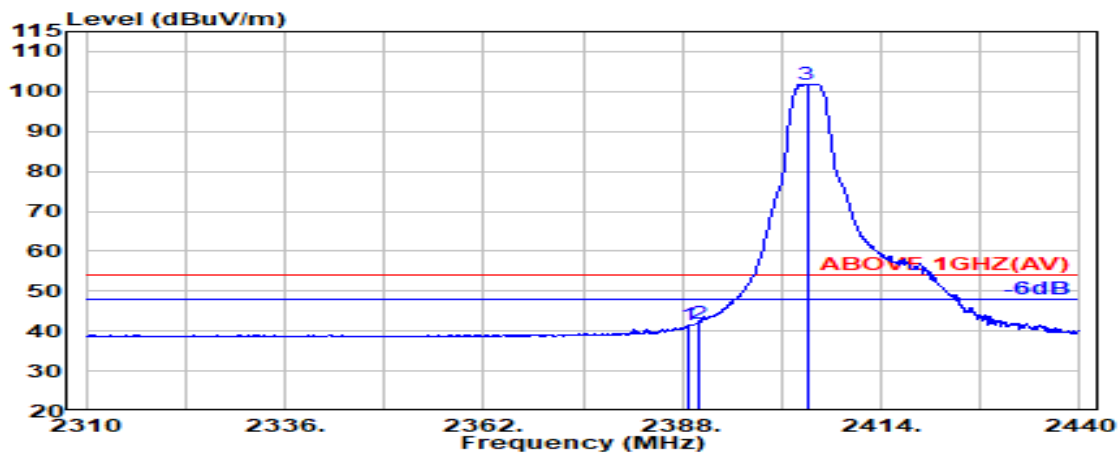


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.51	41.82	41.53	54.00	12.47	Average
2390.000	28.18	6.03	34.51	42.28	41.99	54.00	12.01	Average
@ 2404.300	28.13	6.06	34.51	102.24	101.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

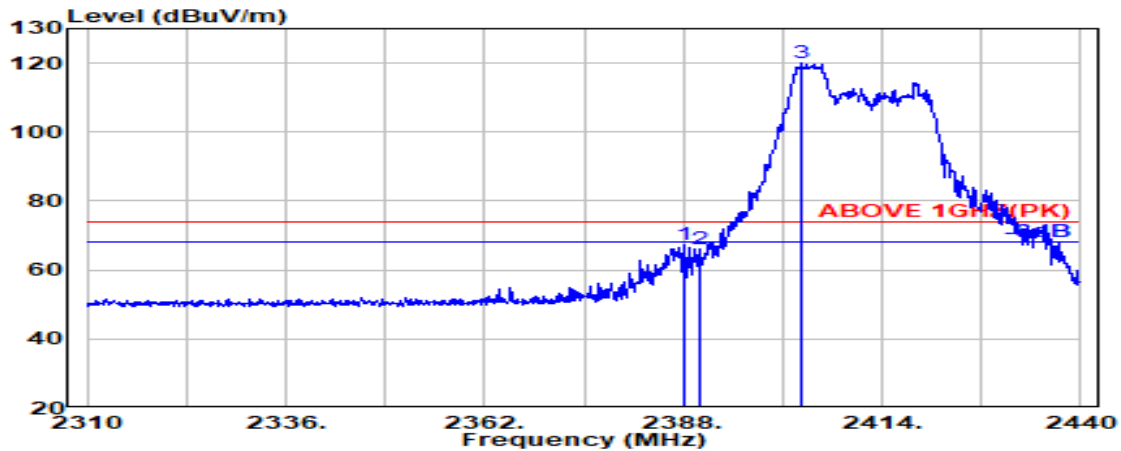

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.100	28.19	6.03	34.51	67.76	67.48	74.00	6.52	Peak
2390.000	28.18	6.03	34.51	66.38	66.09	74.00	7.91	Peak
@ 2403.500	28.12	6.05	34.51	120.25	119.92	---	---	Peak

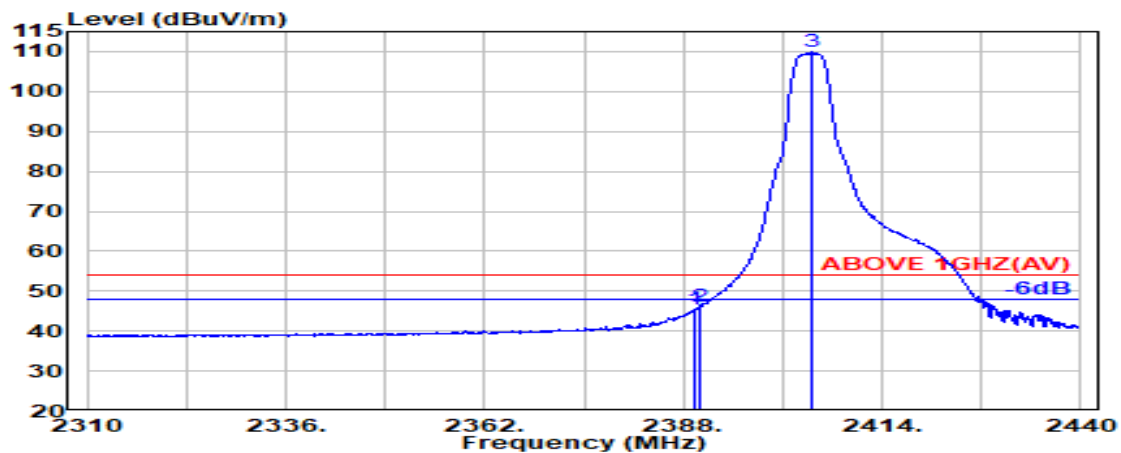


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	45.64	45.34	54.00	8.66	Average
2390.000	28.18	6.03	34.51	46.40	46.11	54.00	7.89	Average
@ 2404.900	28.13	6.06	34.51	110.17	109.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

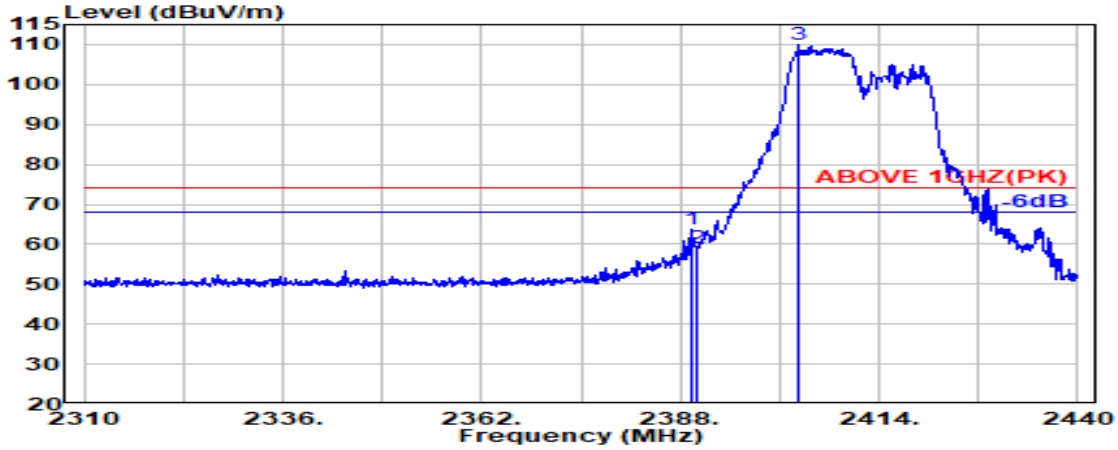

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.51	63.85	63.56	74.00	10.44	Peak
2390.000	28.18	6.03	34.51	59.49	59.19	74.00	14.81	Peak
@ 2403.600	28.12	6.05	34.51	110.36	110.03	---	---	Peak

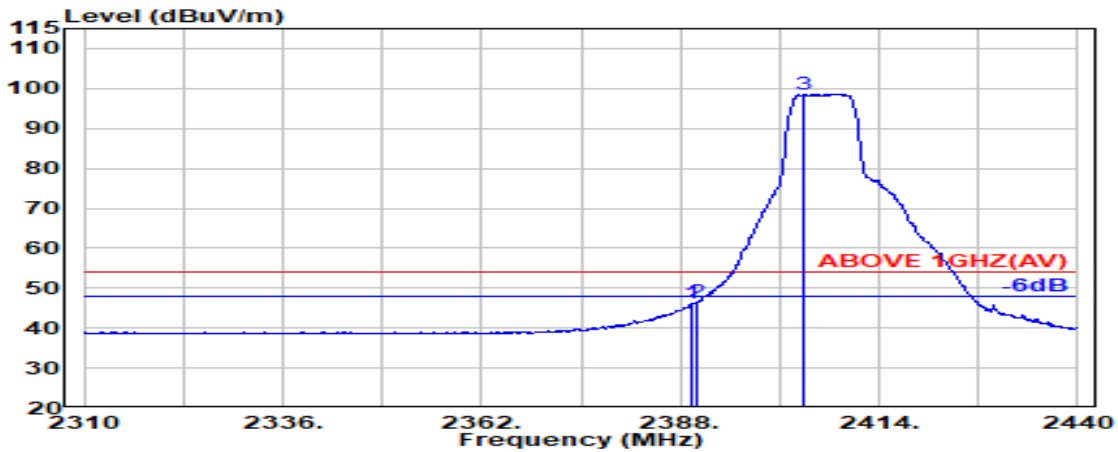


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	46.49	46.20	54.00	7.80	Average
2390.000	28.18	6.03	34.51	46.73	46.43	54.00	7.57	Average
@ 2404.200	28.13	6.06	34.51	98.99	98.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

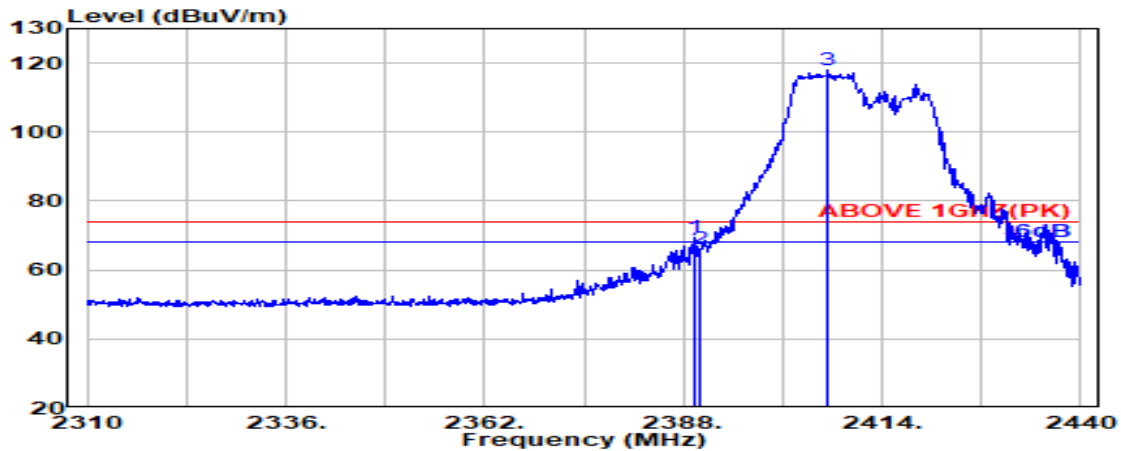

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.51	69.82	69.53	74.00	4.47	Peak
2390.000	28.18	6.03	34.51	66.20	65.91	74.00	8.09	Peak
@ 2407.000	28.14	6.06	34.51	118.08	117.77	---	---	Peak

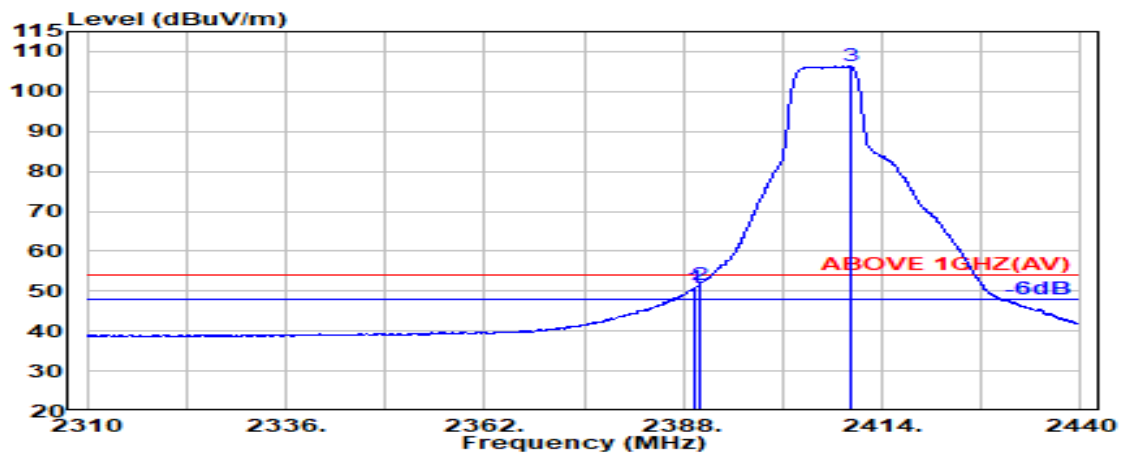


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	51.24	50.95	54.00	3.05	Average
2390.000	28.18	6.03	34.51	51.82	51.53	54.00	2.47	Average
@ 2409.800	28.16	6.06	34.51	106.78	106.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

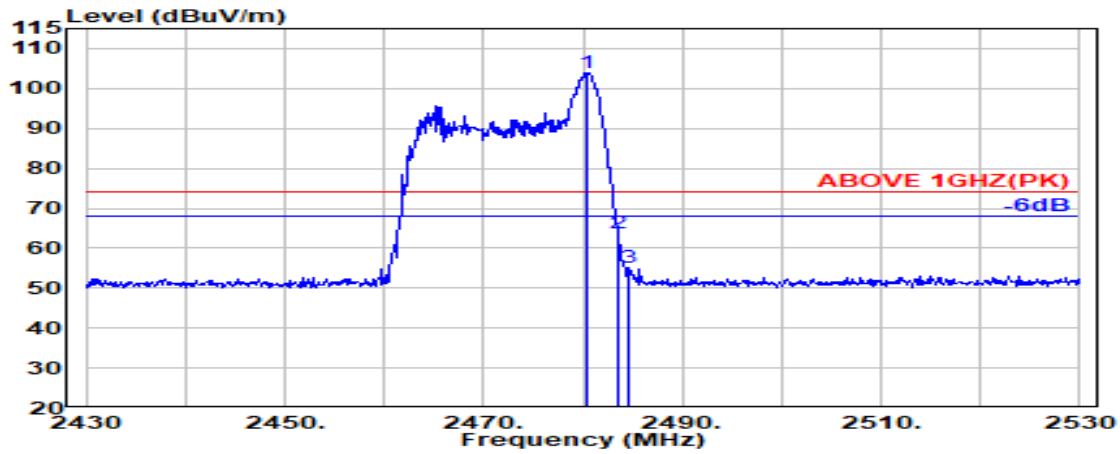

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.46	6.16	34.53	103.86	103.96	---	---	Peak
2483.500	28.47	6.17	34.53	63.52	63.63	74.00	10.37	Peak
2484.500	28.47	6.17	34.53	55.08	55.19	74.00	18.81	Peak

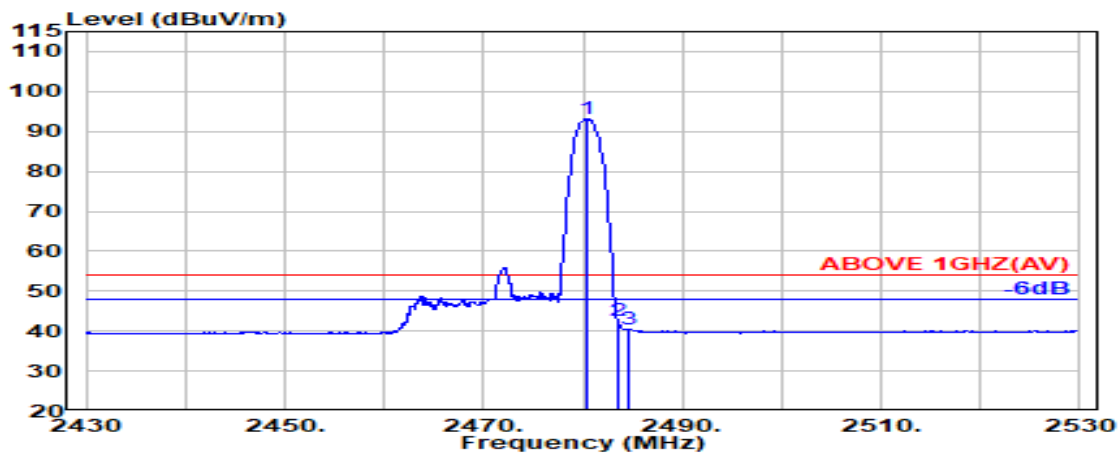


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.46	6.16	34.53	93.09	93.19	---	---	Average
2483.500	28.47	6.17	34.53	42.40	42.51	54.00	11.49	Average
2484.500	28.47	6.17	34.53	40.34	40.45	54.00	13.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

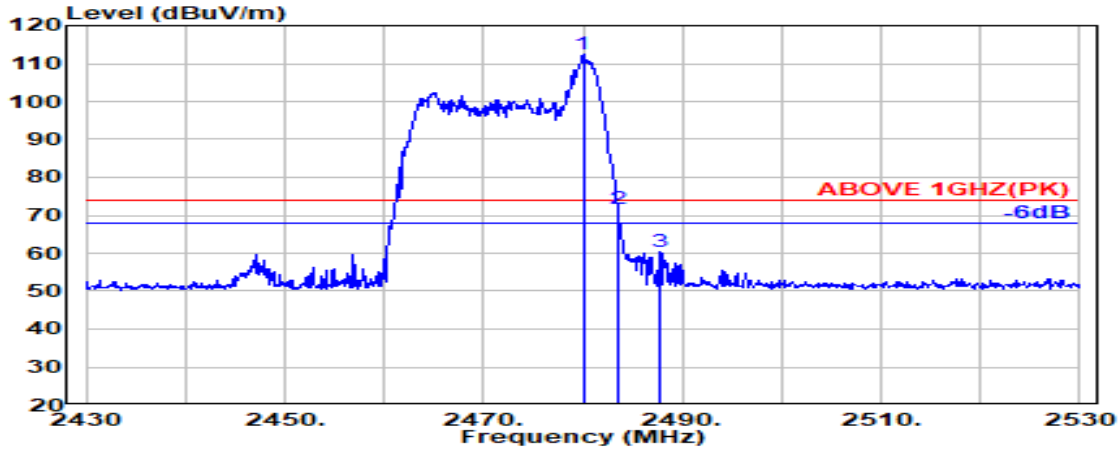

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	34.53	112.18	112.28	---	---	Peak
2483.500	28.47	6.17	34.53	71.67	71.77	74.00	2.23	Peak
2487.800	28.48	6.17	34.53	60.26	60.38	74.00	13.62	Peak

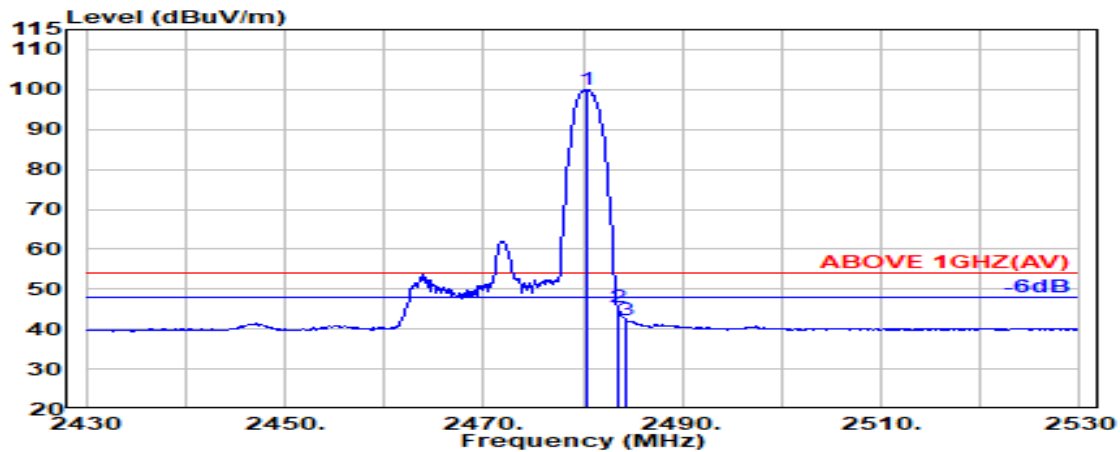


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.46	6.16	34.53	99.89	99.99	---	---	Average
2483.500	28.47	6.17	34.53	45.45	45.56	54.00	8.44	Average
2484.400	28.47	6.17	34.53	42.00	42.11	54.00	11.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

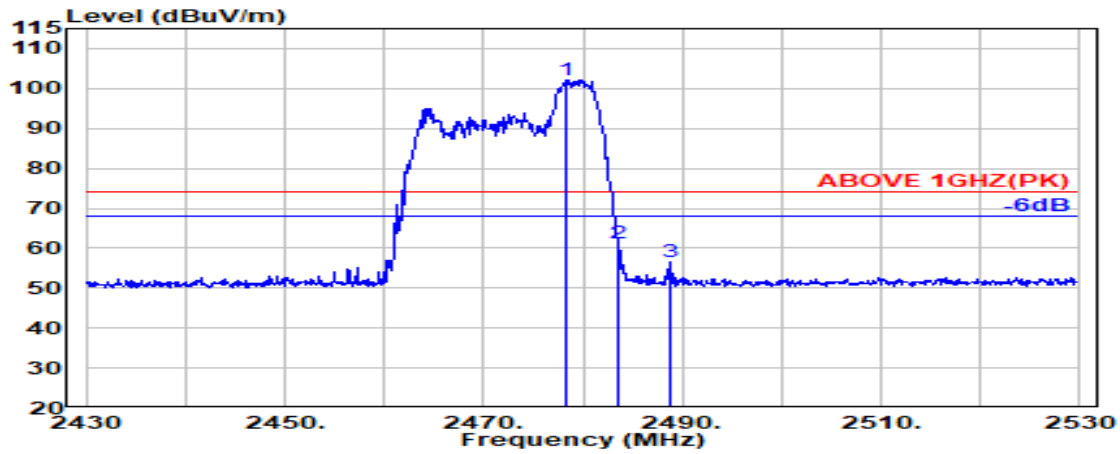

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.46	6.16	34.53	101.96	102.06	---	---	Peak
2483.500	28.47	6.17	34.53	61.22	61.33	74.00	12.67	Peak
2488.800	28.48	6.17	34.53	56.38	56.50	74.00	17.50	Peak

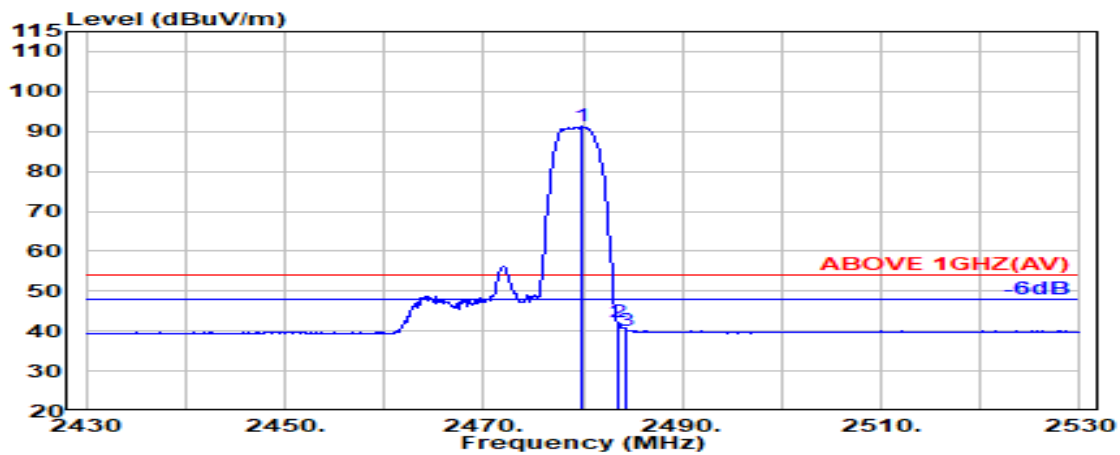


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.46	6.16	34.53	91.23	91.33	---	---	Average
2483.500	28.47	6.17	34.53	42.12	42.22	54.00	11.78	Average
2484.400	28.47	6.17	34.53	40.08	40.19	54.00	13.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

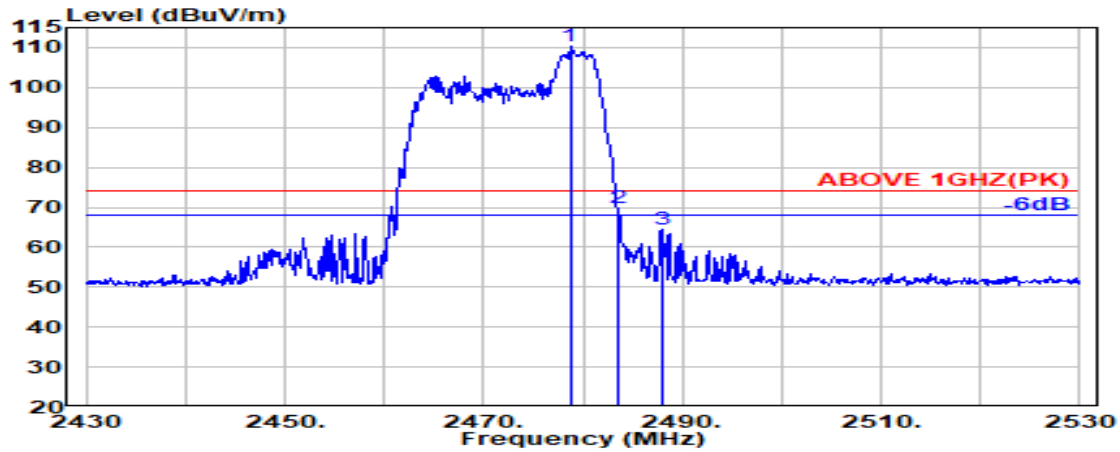

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.46	6.16	34.53	110.08	110.17	---	---	Peak
2483.500	28.47	6.17	34.53	69.69	69.80	74.00	4.20	Peak
2487.900	28.48	6.17	34.53	64.22	64.35	74.00	9.65	Peak

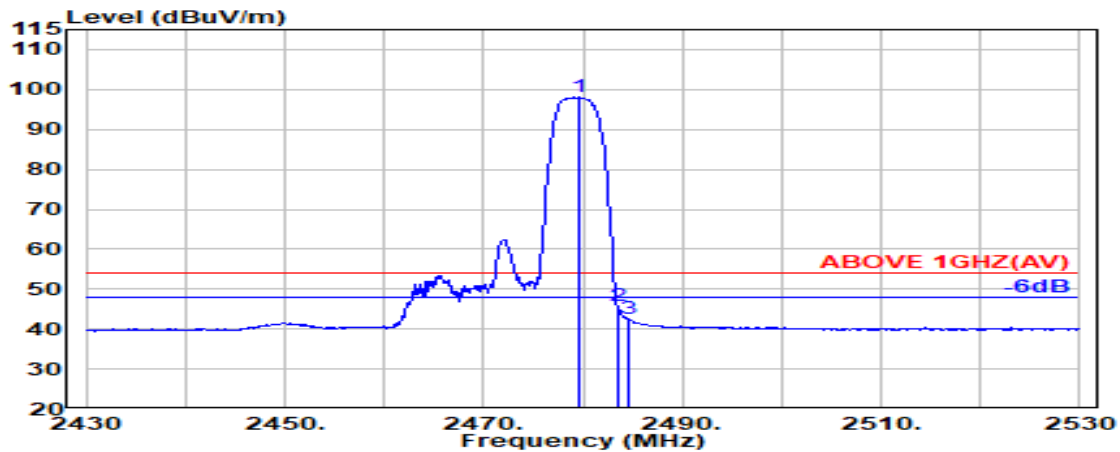


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	28.46	6.16	34.53	98.05	98.15	---	---	Average
2483.500	28.47	6.17	34.53	45.56	45.67	54.00	8.33	Average
2484.600	28.47	6.17	34.53	42.46	42.57	54.00	11.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

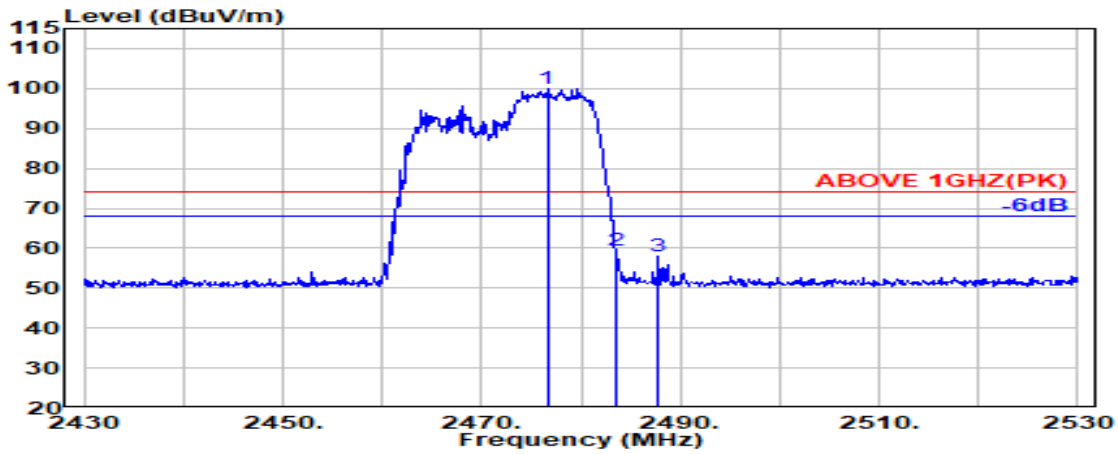

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	28.45	6.16	34.53	99.73	99.81	---	---	Peak
2483.500	28.47	6.17	34.53	59.44	59.55	74.00	14.45	Peak
2487.800	28.48	6.17	34.53	57.96	58.08	74.00	15.92	Peak

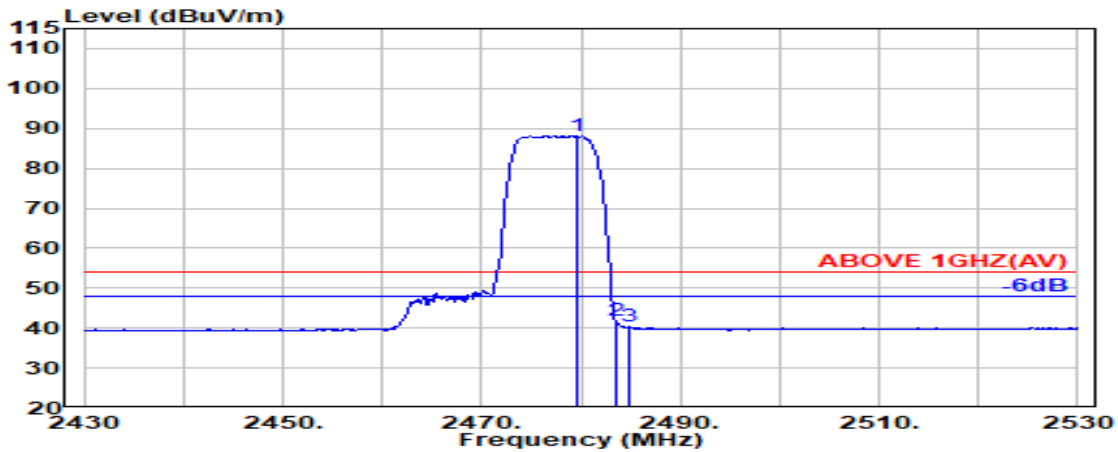


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	28.46	6.16	34.53	88.03	88.13	---	---	Average
2483.500	28.47	6.17	34.53	41.88	41.99	54.00	12.01	Average
2484.900	28.47	6.17	34.53	40.19	40.31	54.00	13.69	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

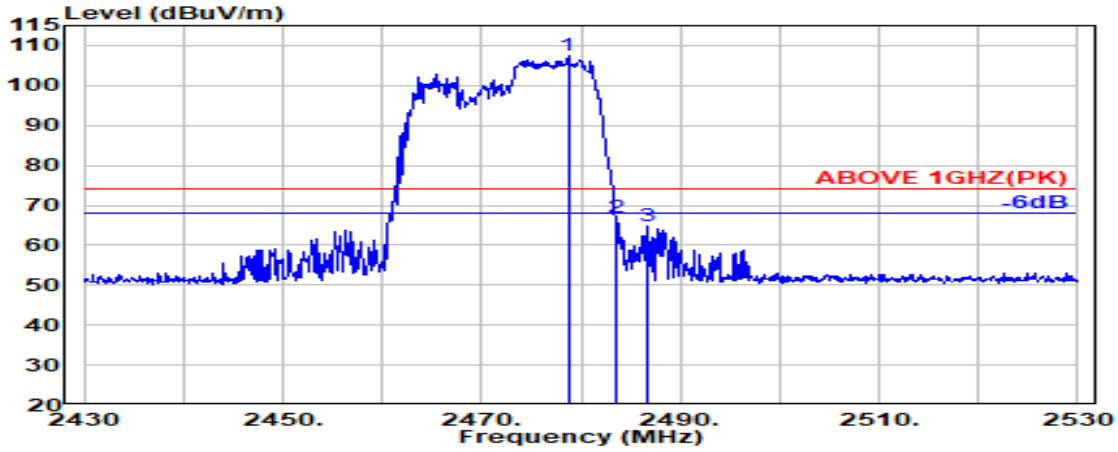

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.46	6.16	34.53	107.44	107.53	---	---	Peak
2483.500	28.47	6.17	34.53	66.85	66.95	74.00	7.05	Peak
2486.600	28.47	6.17	34.53	64.66	64.78	74.00	9.22	Peak

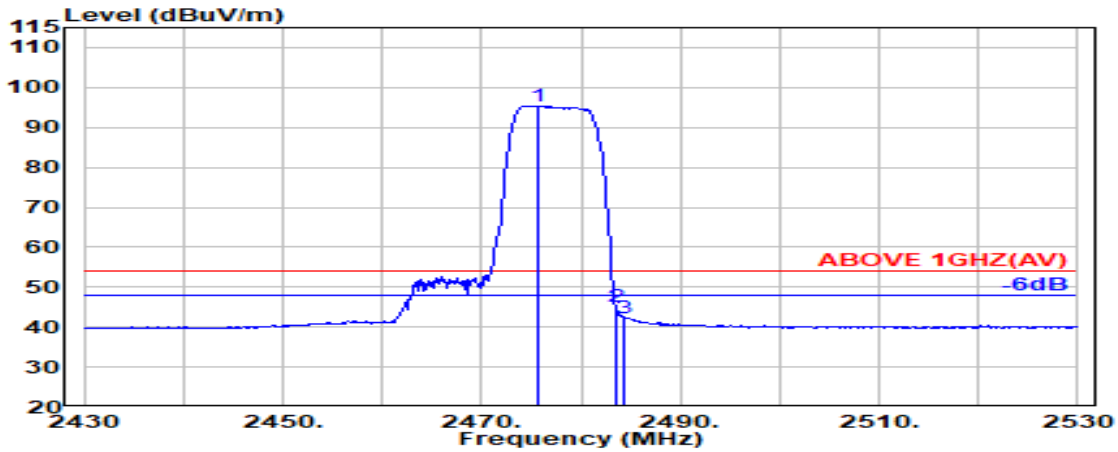


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.600	28.45	6.16	34.53	95.24	95.33	---	---	Average
2483.500	28.47	6.17	34.53	44.86	44.97	54.00	9.03	Average
2484.400	28.47	6.17	34.53	42.29	42.40	54.00	11.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

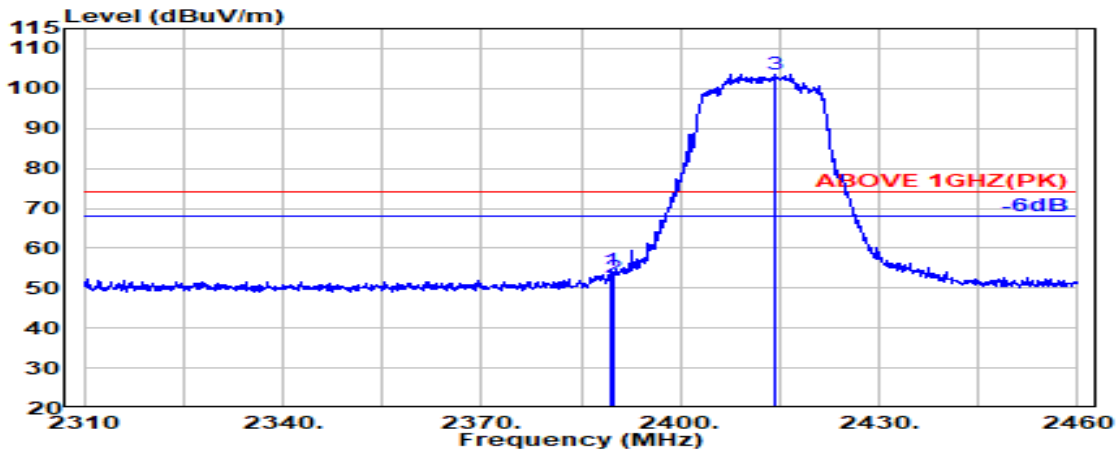

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	54.69	54.40	74.00	19.60	Peak
2390.000	28.18	6.03	34.51	52.74	52.45	74.00	21.55	Peak
@ 2414.200	28.19	6.07	34.51	103.83	103.58	---	---	Peak

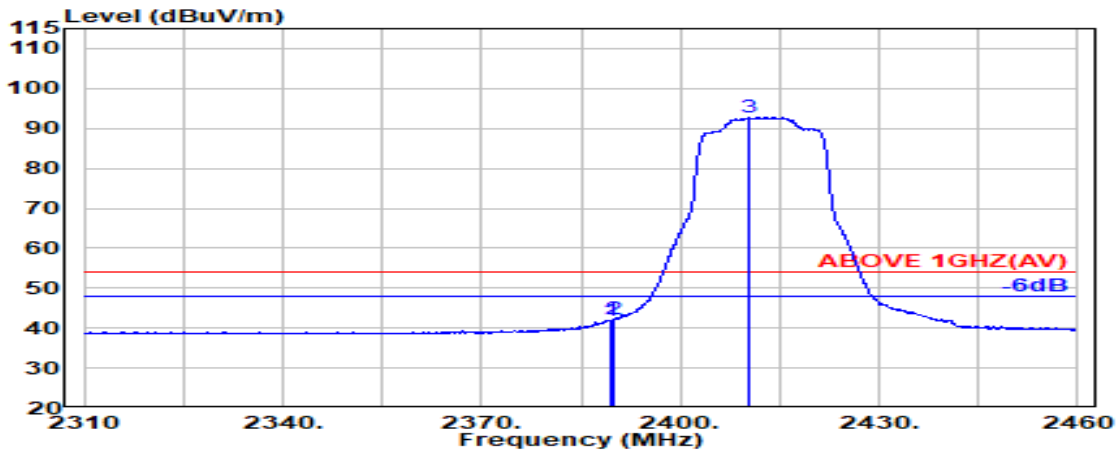


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	42.21	41.92	54.00	12.08	Average
2390.000	28.18	6.03	34.51	42.60	42.31	54.00	11.69	Average
@ 2410.400	28.16	6.06	34.51	93.07	92.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

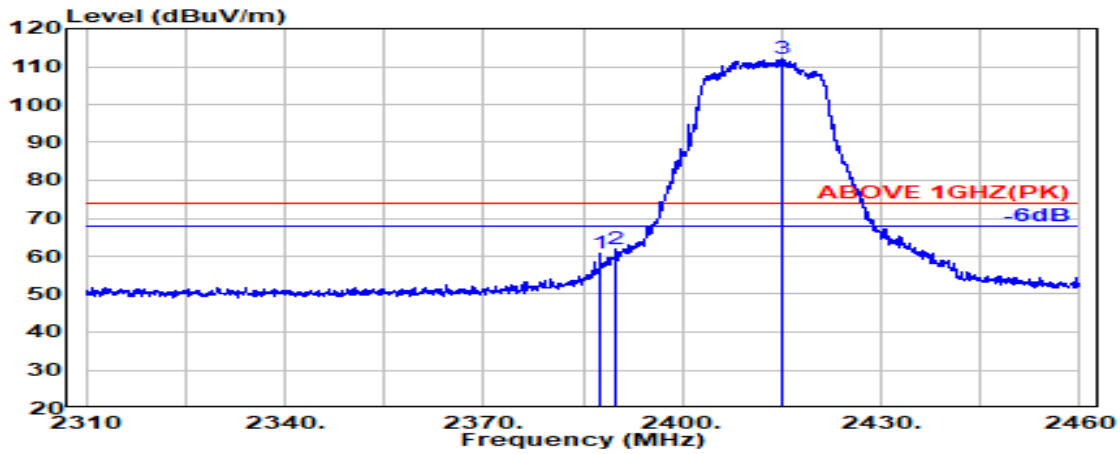

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.500	28.20	6.03	34.51	60.96	60.69	74.00	13.31	Peak
2390.000	28.18	6.03	34.51	62.32	62.03	74.00	11.97	Peak
@ 2414.900	28.19	6.07	34.51	112.14	111.89	---	---	Peak

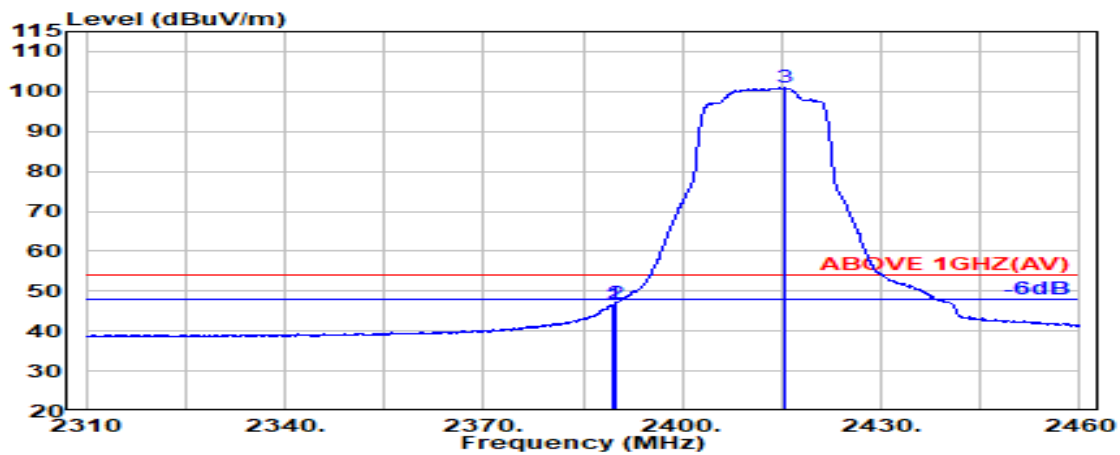


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.51	46.93	46.64	54.00	7.36	Average
2390.000	28.18	6.03	34.51	47.31	47.01	54.00	6.99	Average
@ 2415.500	28.19	6.07	34.51	101.16	100.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

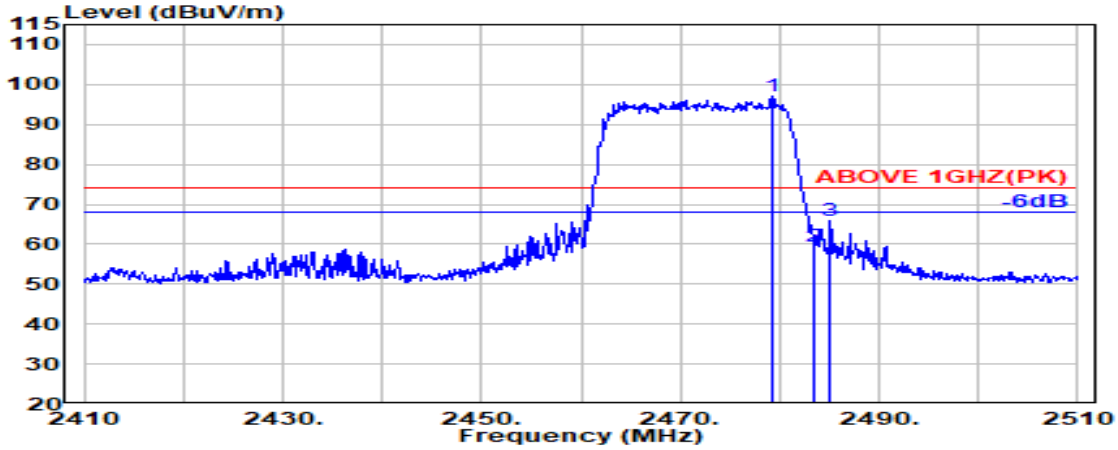

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.46	6.16	34.53	97.02	97.11	---	---	Peak
2483.500	28.47	6.17	34.53	59.37	59.48	74.00	14.52	Peak
2485.100	28.47	6.17	34.53	65.91	66.02	74.00	7.98	Peak

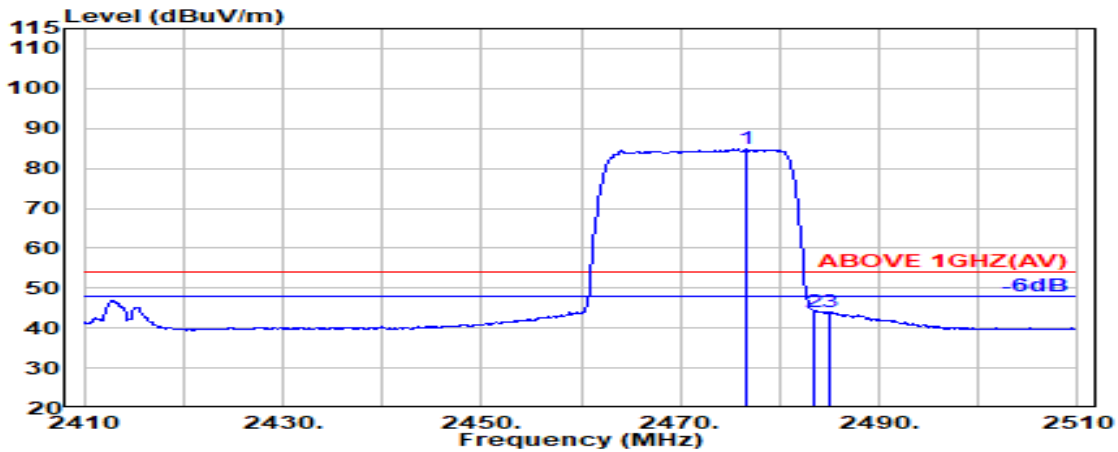


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	28.45	6.16	34.53	84.65	84.74	---	---	Average
2483.500	28.47	6.17	34.53	44.03	44.14	54.00	9.86	Average
2485.100	28.47	6.17	34.53	44.06	44.17	54.00	9.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

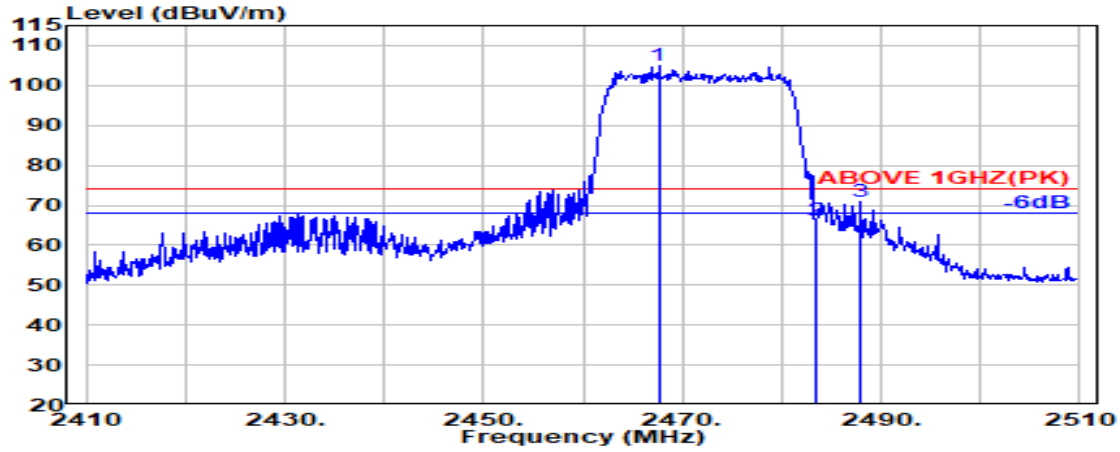

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	28.44	6.14	34.52	104.77	104.83	---	---	Peak
2483.500	28.47	6.17	34.53	66.12	66.23	74.00	7.77	Peak
2488.000	28.48	6.17	34.53	70.78	70.90	74.00	3.10	Peak

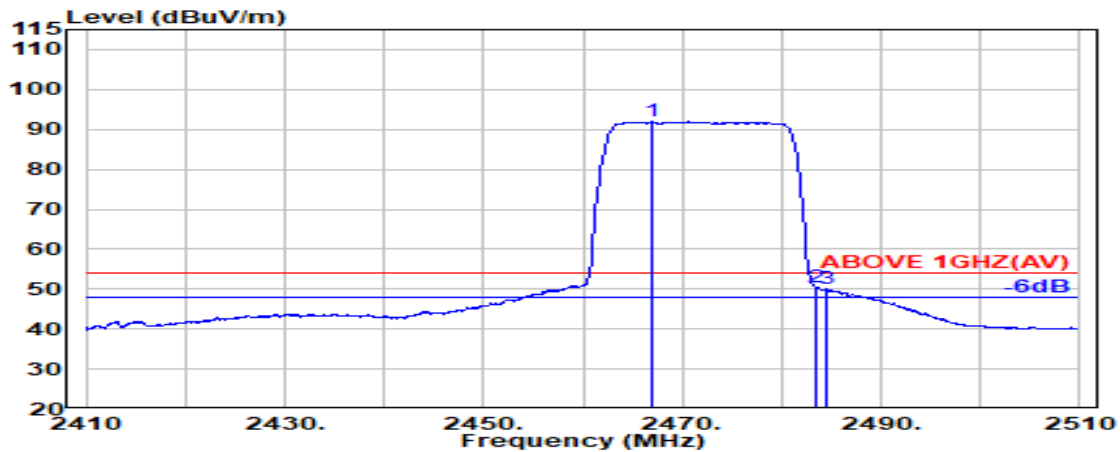


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.900	28.43	6.14	34.52	91.97	92.03	---	---	Average
2483.500	28.47	6.17	34.53	50.42	50.52	54.00	3.48	Average
2484.500	28.47	6.17	34.53	49.85	49.96	54.00	4.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

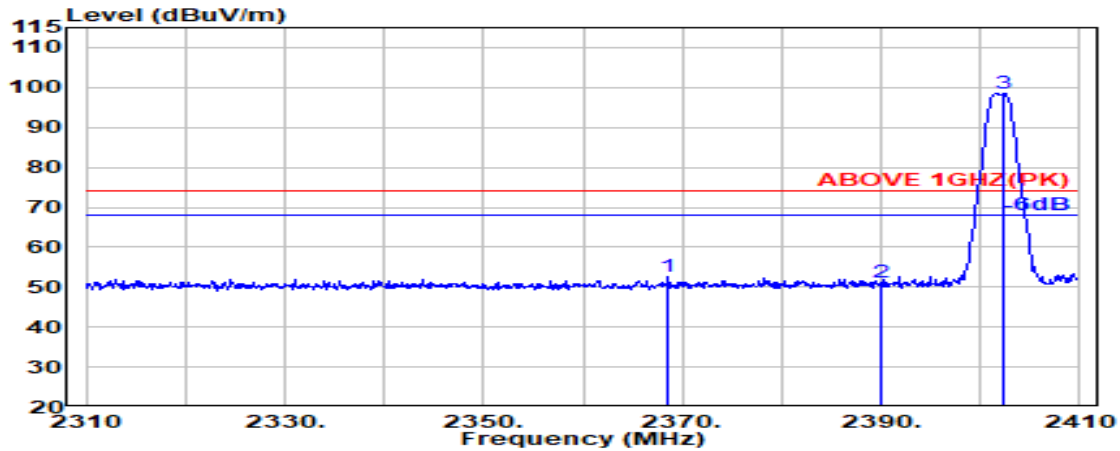

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2368.500	28.35	6.00	34.50	52.62	52.47	74.00	21.53	Peak
2390.000	28.18	6.03	34.51	51.41	51.11	74.00	22.89	Peak
@ 2402.400	28.11	6.05	34.51	98.87	98.53	---	---	Peak

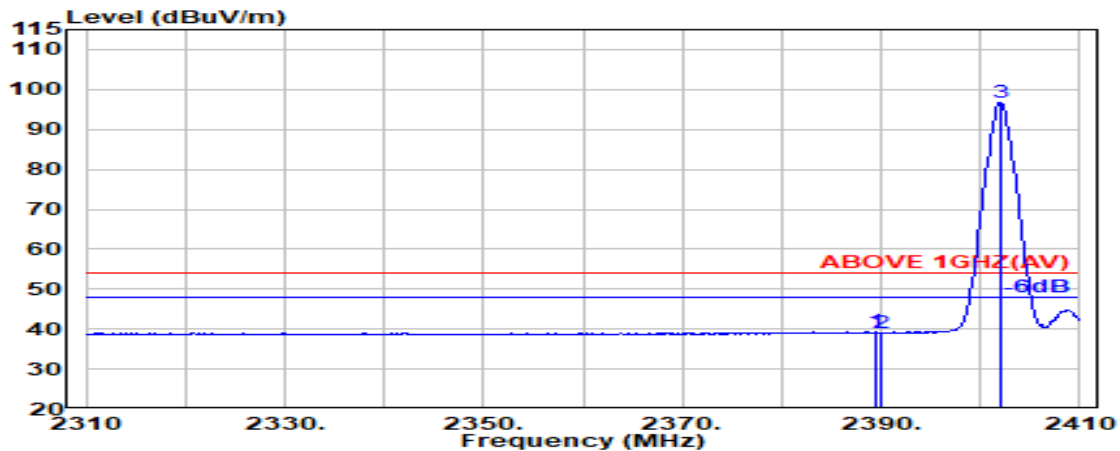


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.51	39.58	39.29	54.00	14.71	Average
2390.000	28.18	6.03	34.51	39.31	39.02	54.00	14.98	Average
@ 2402.000	28.11	6.05	34.51	97.12	96.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

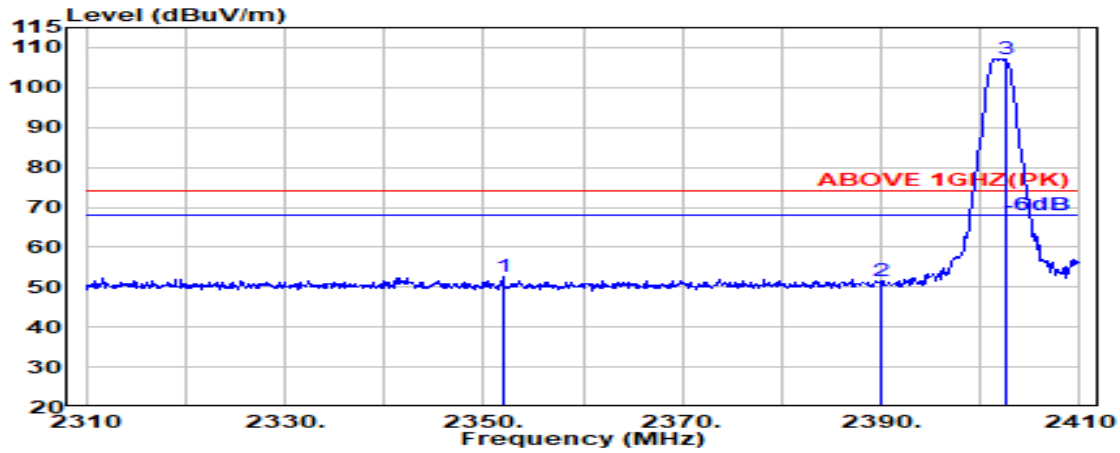

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2351.900	28.48	5.98	34.50	52.83	52.79	74.00	21.21	Peak
2390.000	28.18	6.03	34.51	51.75	51.45	74.00	22.55	Peak
@ 2402.500	28.12	6.05	34.51	107.50	107.15	---	---	Peak

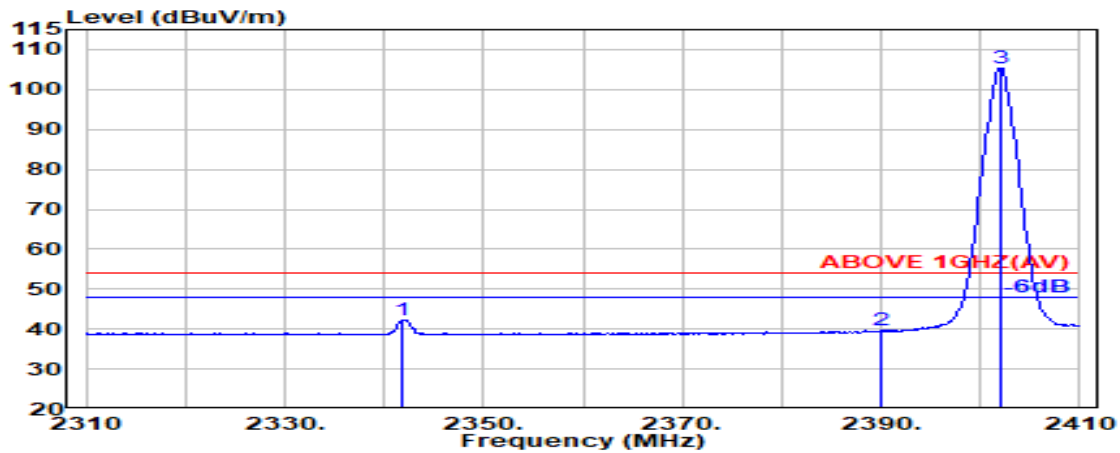


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	28.44	5.96	34.50	42.34	42.24	54.00	11.76	Average
2390.000	28.18	6.03	34.51	39.99	39.70	54.00	14.30	Average
@ 2402.000	28.11	6.05	34.51	105.74	105.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

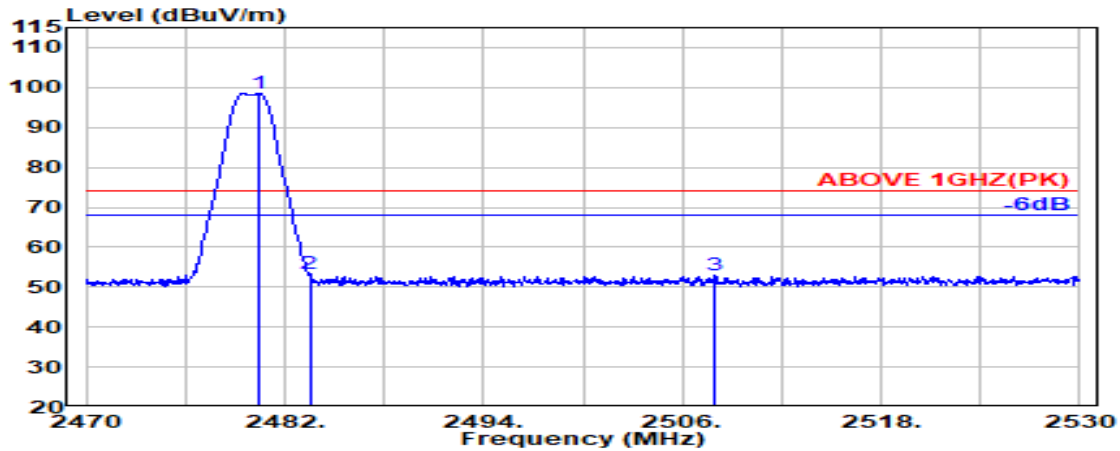

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	34.53	98.38	98.47	---	---	Peak
2483.500	28.47	6.17	34.53	53.32	53.43	74.00	20.57	Peak
2508.000	28.55	6.20	34.53	52.62	52.83	74.00	21.17	Peak

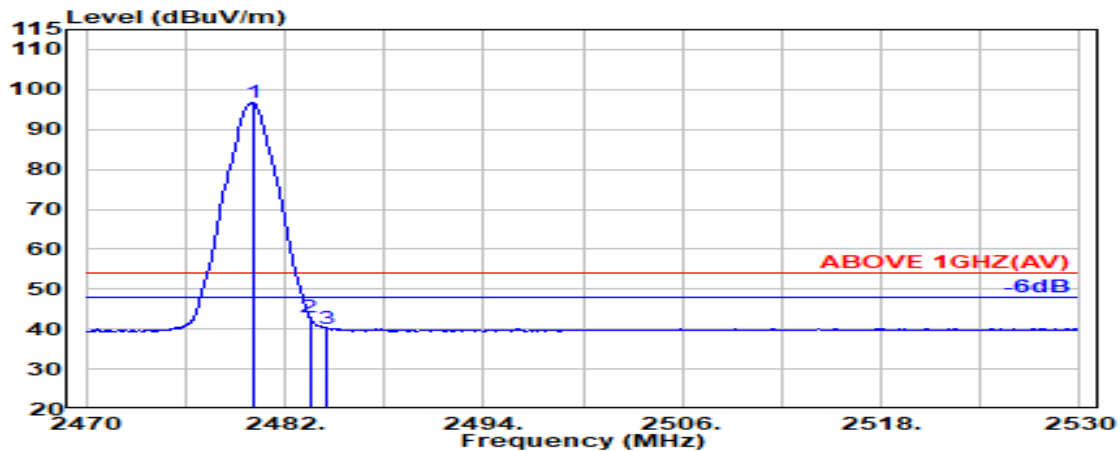


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.53	96.66	96.76	---	---	Average
2483.500	28.47	6.17	34.53	42.69	42.80	54.00	11.20	Average
2484.500	28.47	6.17	34.53	40.10	40.21	54.00	13.79	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

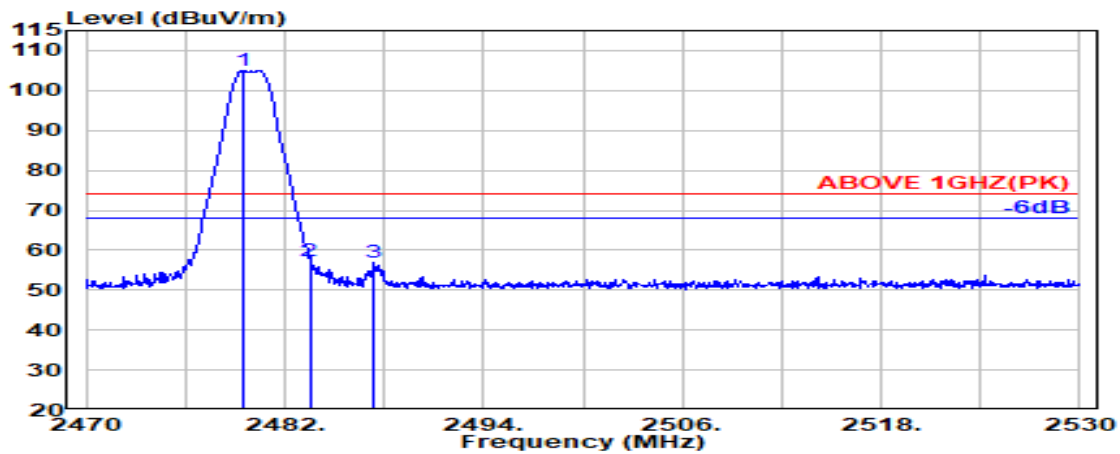

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.46	6.16	34.53	104.86	104.96	---	---	Peak
2483.500	28.47	6.17	34.53	57.10	57.21	74.00	16.79	Peak
2487.350	28.47	6.17	34.53	56.89	57.01	74.00	16.99	Peak

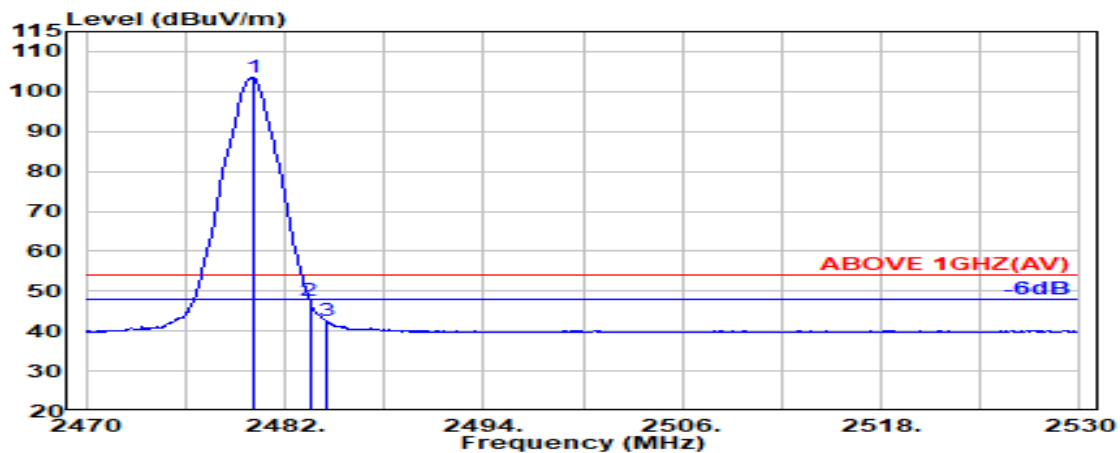


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.53	103.29	103.39	---	---	Average
2483.500	28.47	6.17	34.53	47.56	47.67	54.00	6.33	Average
2484.500	28.47	6.17	34.53	42.37	42.48	54.00	11.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

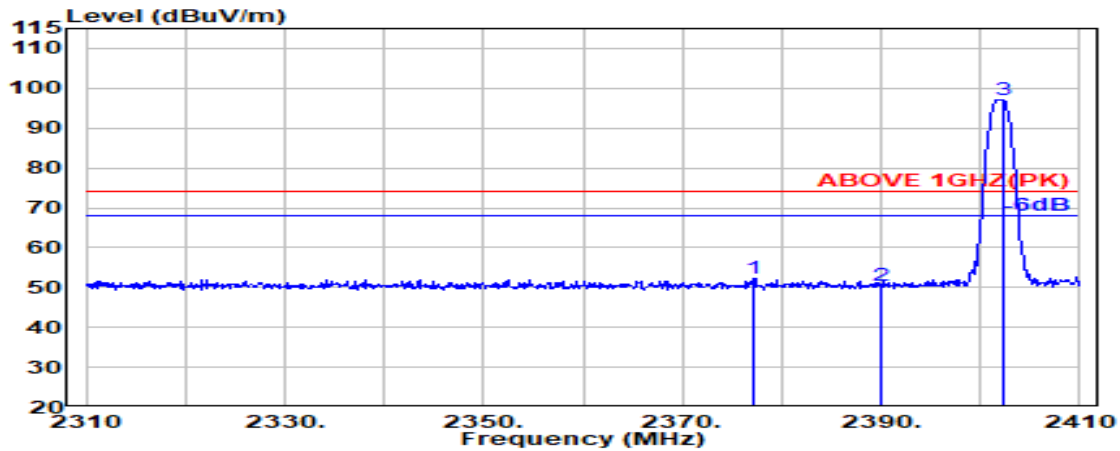

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.200	28.28	6.02	34.51	52.61	52.40	74.00	21.60	Peak
2390.000	28.18	6.03	34.51	50.68	50.39	74.00	23.61	Peak
@ 2402.200	28.11	6.05	34.51	97.59	97.24	---	---	Peak

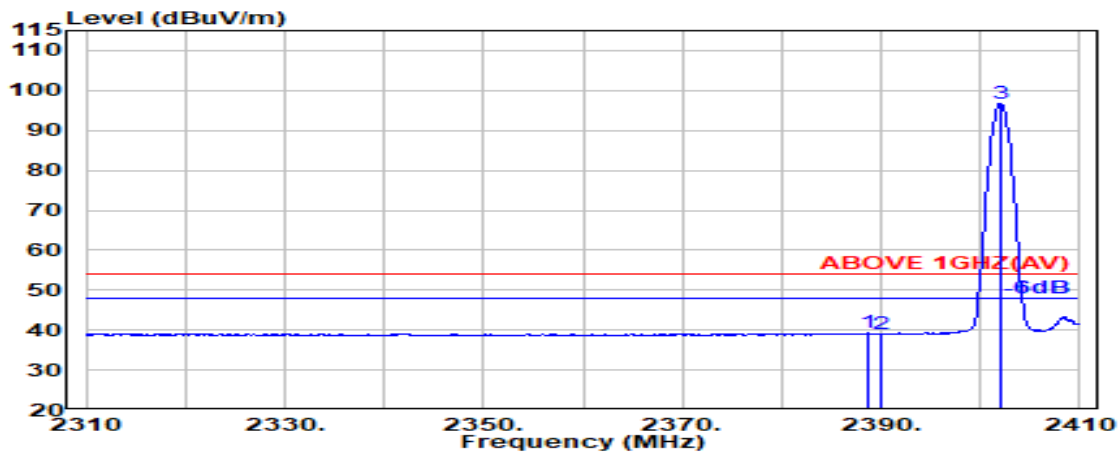


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.19	6.03	34.51	39.47	39.19	54.00	14.81	Average
2390.000	28.18	6.03	34.51	39.39	39.09	54.00	14.91	Average
@ 2402.100	28.11	6.05	34.51	97.00	96.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

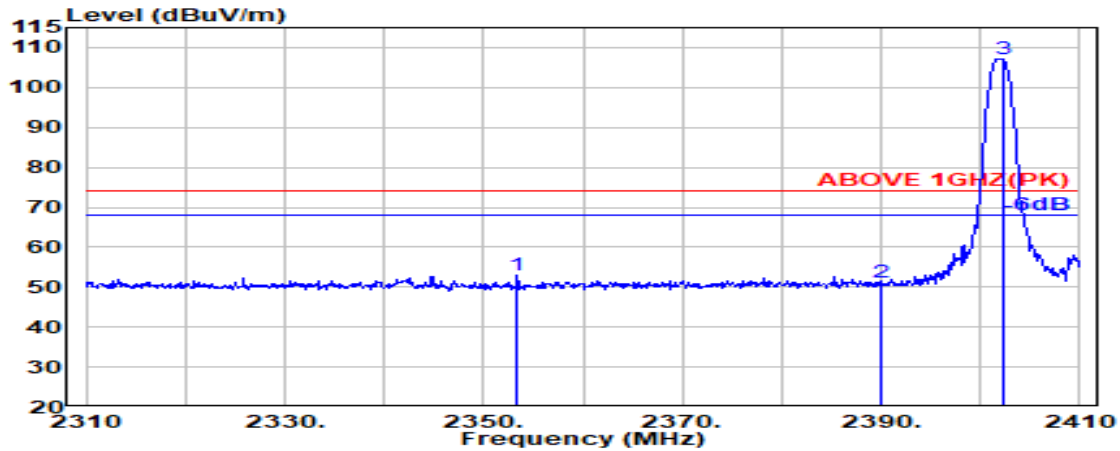

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2353.400	28.47	5.98	34.50	52.87	52.83	74.00	21.17	Peak
2390.000	28.18	6.03	34.51	51.57	51.27	74.00	22.73	Peak
@ 2402.200	28.11	6.05	34.51	107.57	107.23	---	---	Peak

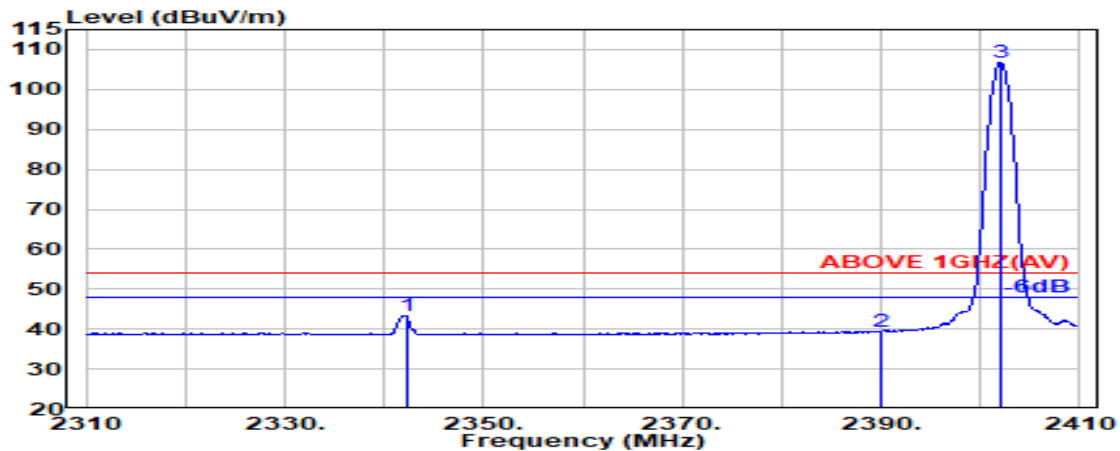


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.200	28.44	5.97	34.50	43.30	43.21	54.00	10.79	Average
2390.000	28.18	6.03	34.51	39.62	39.33	54.00	14.67	Average
@ 2402.000	28.11	6.05	34.51	107.06	106.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (PHY Coded S8)	Frequency	TX 2480MHz
------	--------------------	-----------	------------

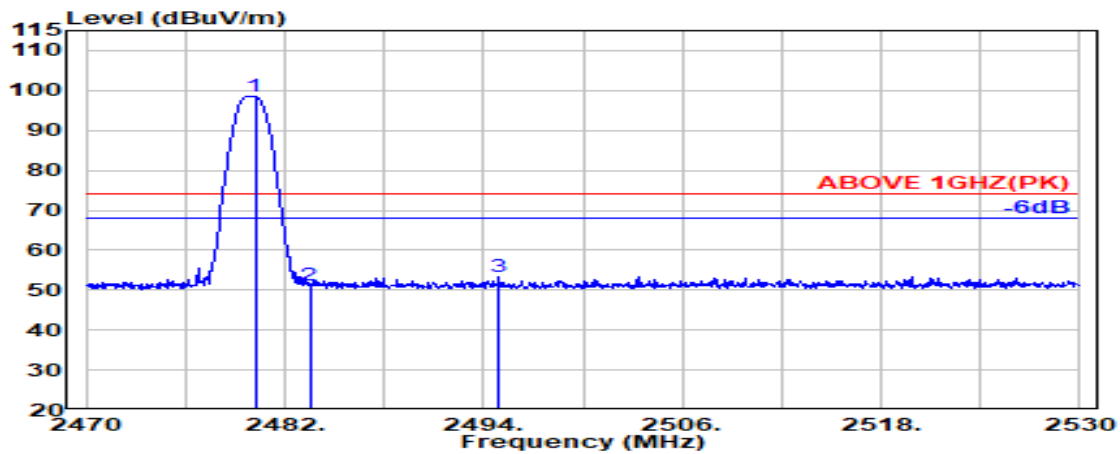

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.46	6.16	34.53	98.42	98.52	---	---	Peak
2483.500	28.47	6.17	34.53	51.12	51.23	74.00	22.77	Peak
2494.950	28.49	6.18	34.53	53.13	53.27	74.00	20.73	Peak

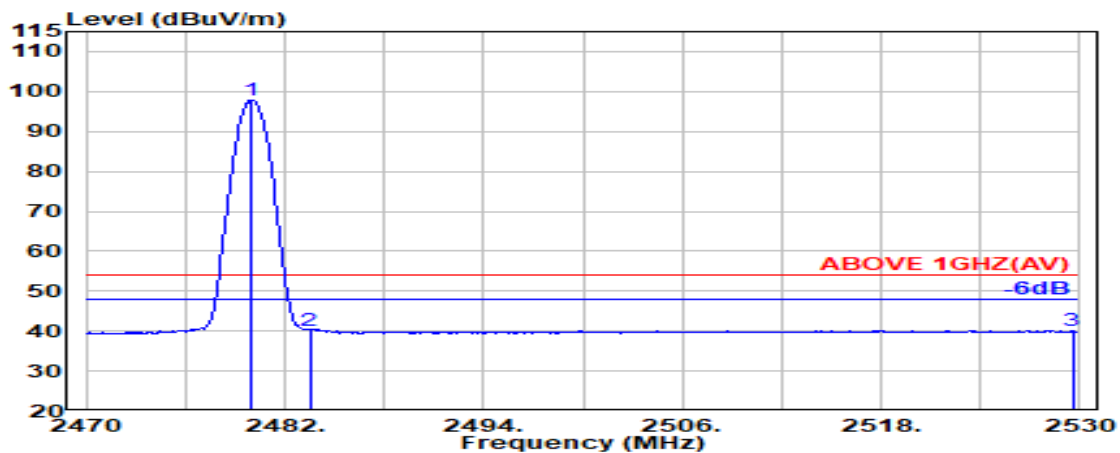


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	34.53	97.83	97.92	---	---	Average
2483.500	28.47	6.17	34.53	40.14	40.24	54.00	13.76	Average
2529.550	28.68	6.22	34.54	39.67	40.04	54.00	13.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (PHY Coded S8)	Frequency	TX 2480MHz
------	--------------------	-----------	------------

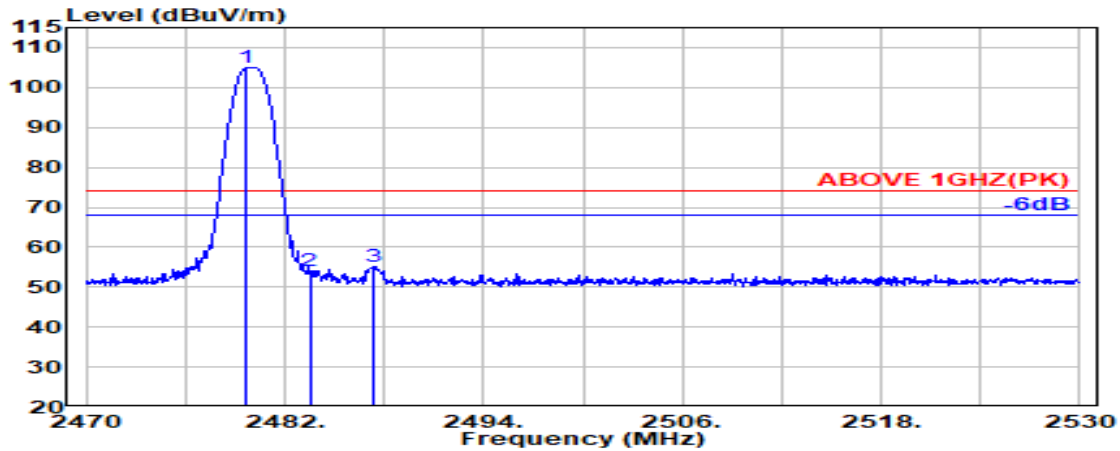

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	28.46	6.16	34.53	104.88	104.98	---	---	Peak
2483.500	28.47	6.17	34.53	53.95	54.05	74.00	19.95	Peak
2487.350	28.47	6.17	34.53	55.15	55.27	74.00	18.73	Peak

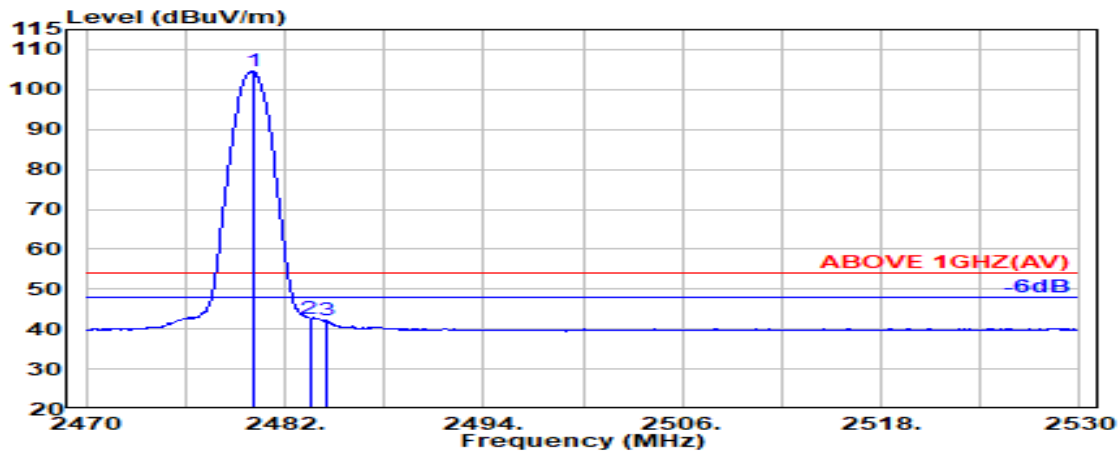


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.53	104.42	104.51	---	---	Average
2483.500	28.47	6.17	34.53	42.55	42.66	54.00	11.34	Average
2484.500	28.47	6.17	34.53	41.99	42.10	54.00	11.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

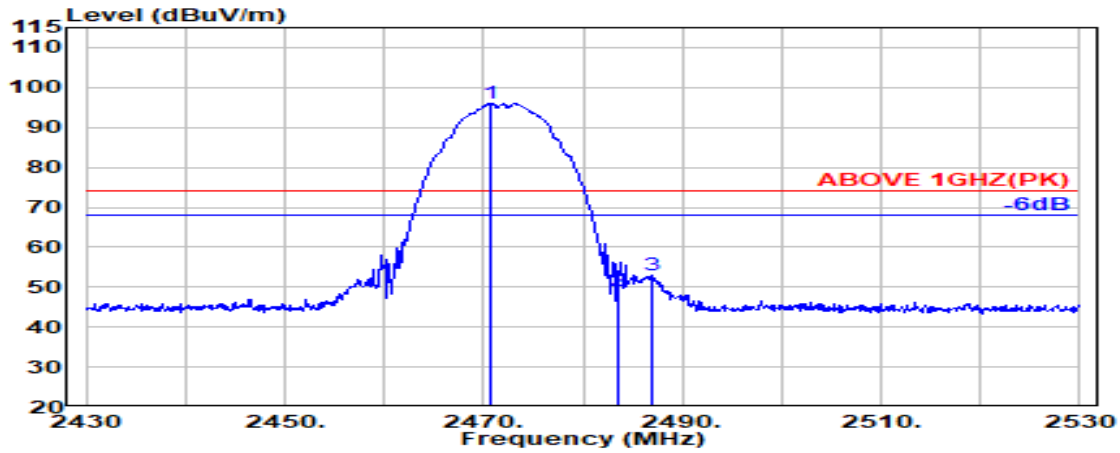

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.44	6.15	34.52	95.86	95.92	---	---	Peak
2483.500	28.47	6.17	34.53	48.95	49.06	74.00	24.94	Peak
2486.900	28.47	6.17	34.53	52.98	53.10	74.00	20.90	Peak

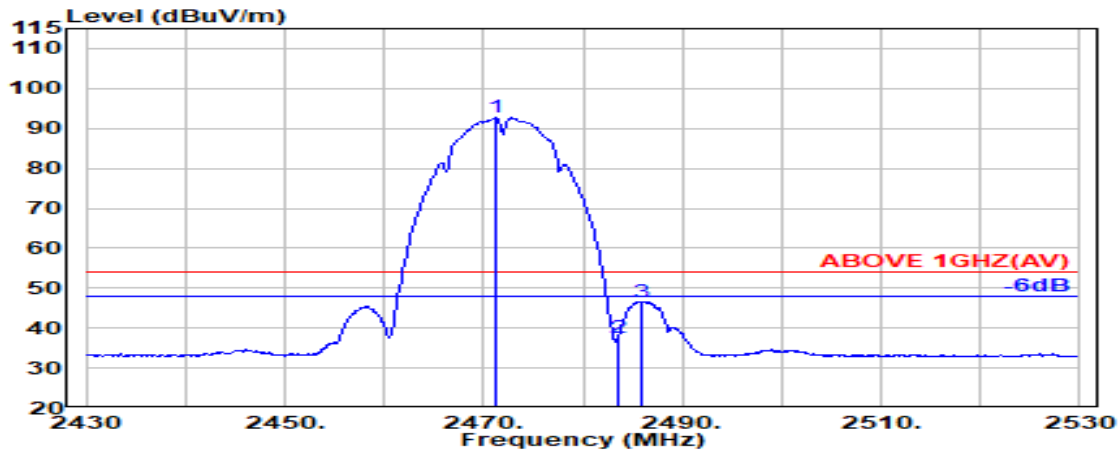


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	6.15	34.52	92.68	92.75	---	---	Average
2483.500	28.47	6.17	34.53	37.58	37.69	54.00	16.31	Average
2485.800	28.47	6.17	34.53	46.56	46.68	54.00	7.32	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

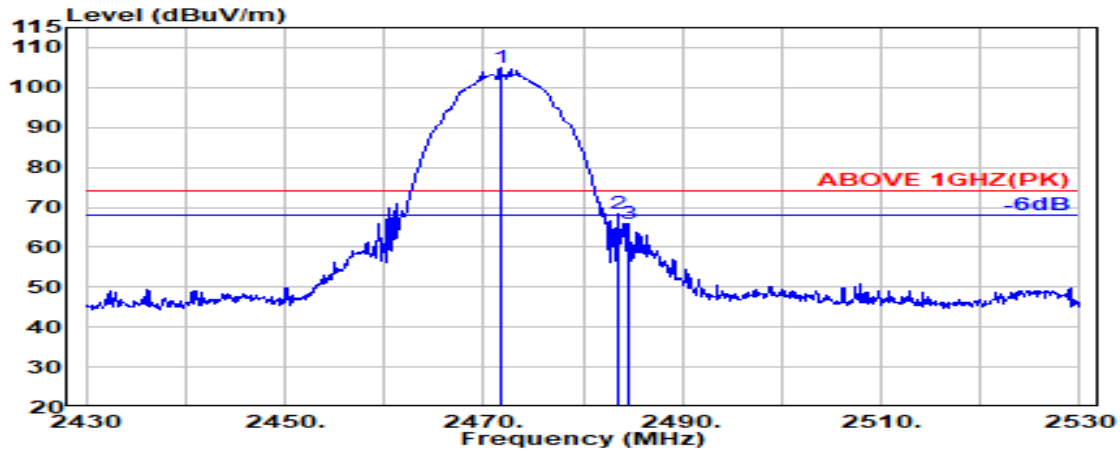

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.700	28.44	6.15	34.52	104.80	104.87	---	---	Peak
2483.500	28.47	6.17	34.53	68.11	68.22	74.00	5.78	Peak
2484.500	28.47	6.17	34.53	65.60	65.71	74.00	8.29	Peak

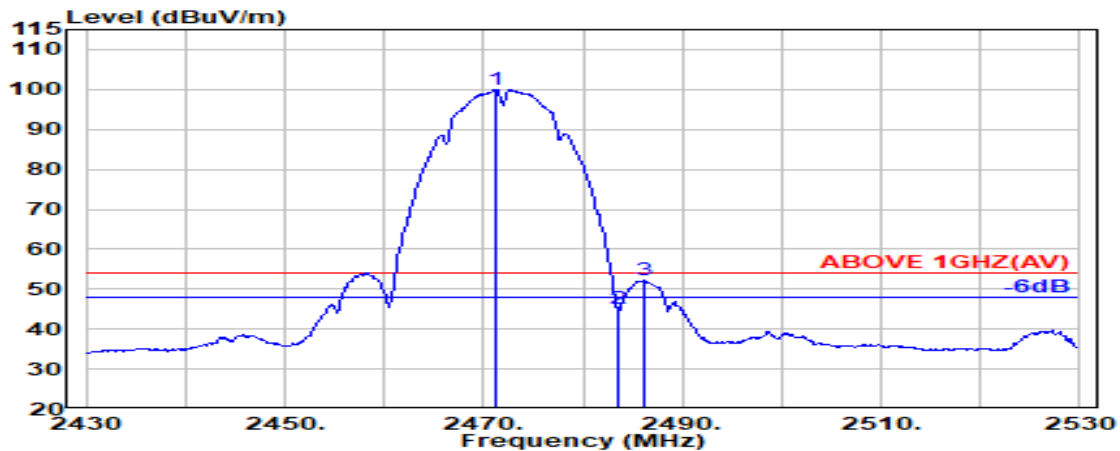


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.44	6.15	34.52	99.93	100.00	---	---	Average
2483.500	28.47	6.17	34.53	45.15	45.26	54.00	8.74	Average
2486.200	28.47	6.17	34.53	51.98	52.10	54.00	1.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

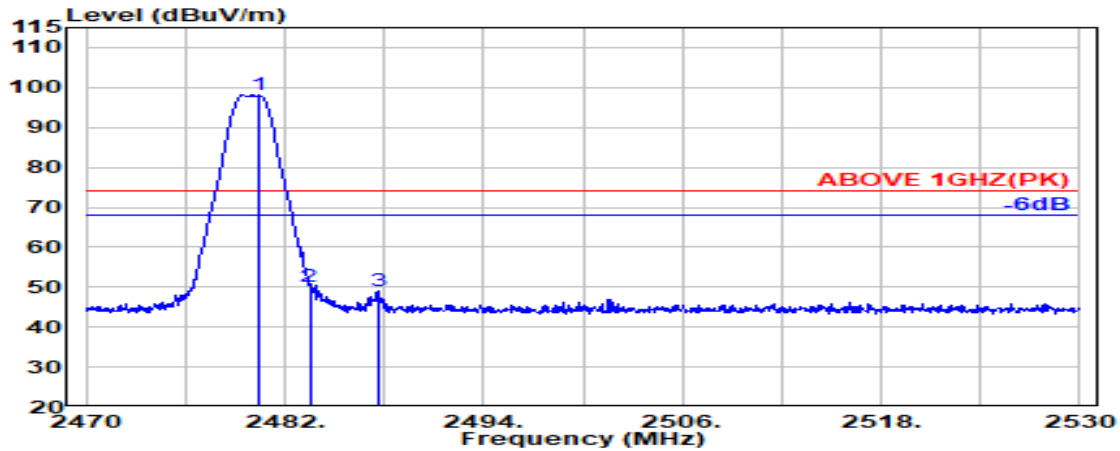

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.46	6.16	34.53	97.93	98.02	---	---	Peak
2483.500	28.47	6.17	34.53	49.89	50.00	74.00	24.00	Peak
2487.650	28.48	6.17	34.53	48.84	48.96	74.00	25.04	Peak

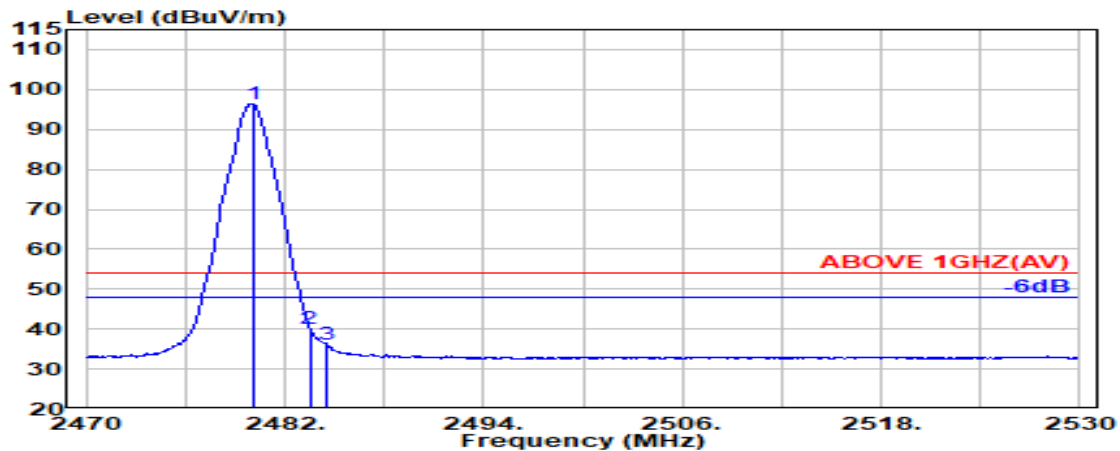


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	6.16	34.53	96.29	96.39	---	---	Average
2483.500	28.47	6.17	34.53	40.12	40.22	54.00	13.78	Average
2484.500	28.47	6.17	34.53	36.15	36.26	54.00	17.74	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

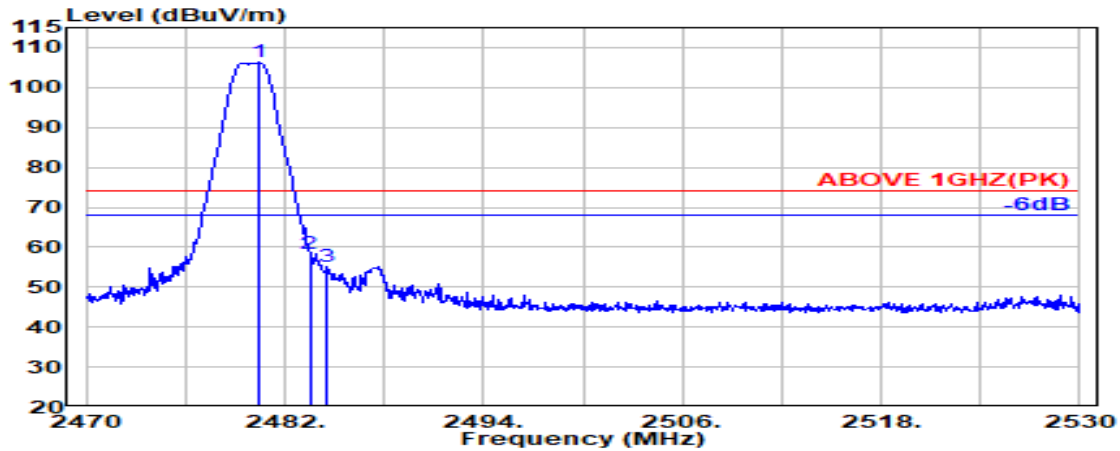

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.46	6.16	34.53	106.13	106.23	---	---	Peak
2483.500	28.47	6.17	34.53	58.42	58.52	74.00	15.48	Peak
2484.500	28.47	6.17	34.53	55.18	55.29	74.00	18.71	Peak

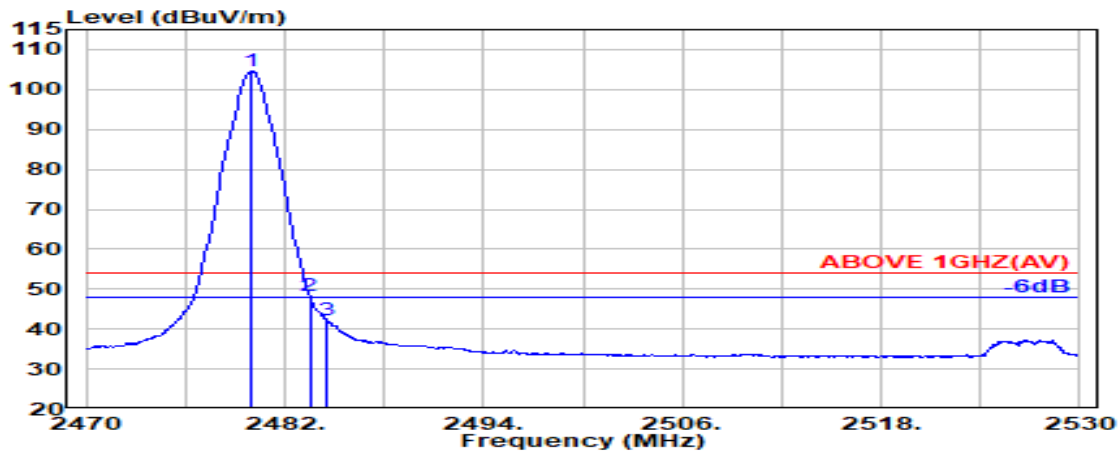


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.46	6.16	34.53	104.53	104.62	---	---	Average
2483.500	28.47	6.17	34.53	48.13	48.24	54.00	5.76	Average
2484.500	28.47	6.17	34.53	42.28	42.40	54.00	11.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

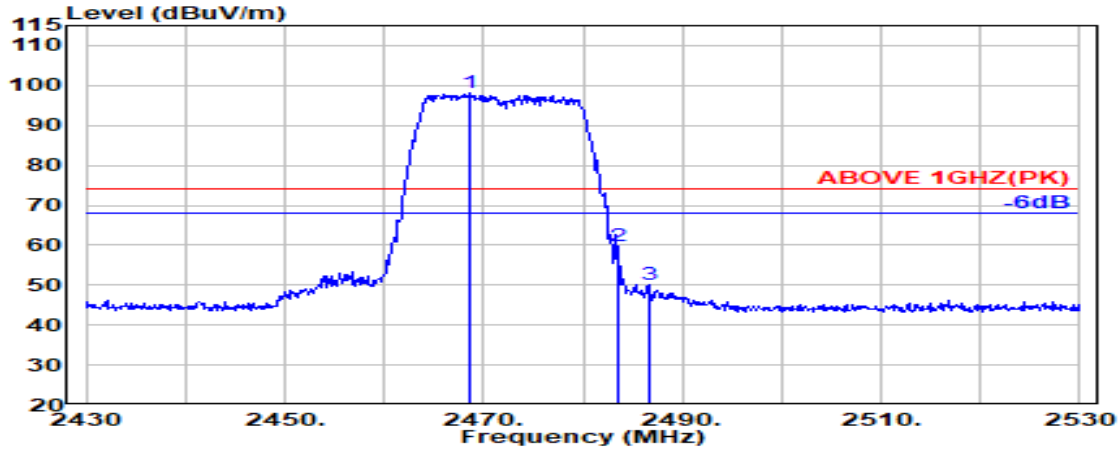

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.44	6.15	34.52	98.11	98.17	---	---	Peak
2483.500	28.47	6.17	34.53	59.67	59.78	74.00	14.22	Peak
2486.700	28.47	6.17	34.53	50.06	50.18	74.00	23.82	Peak

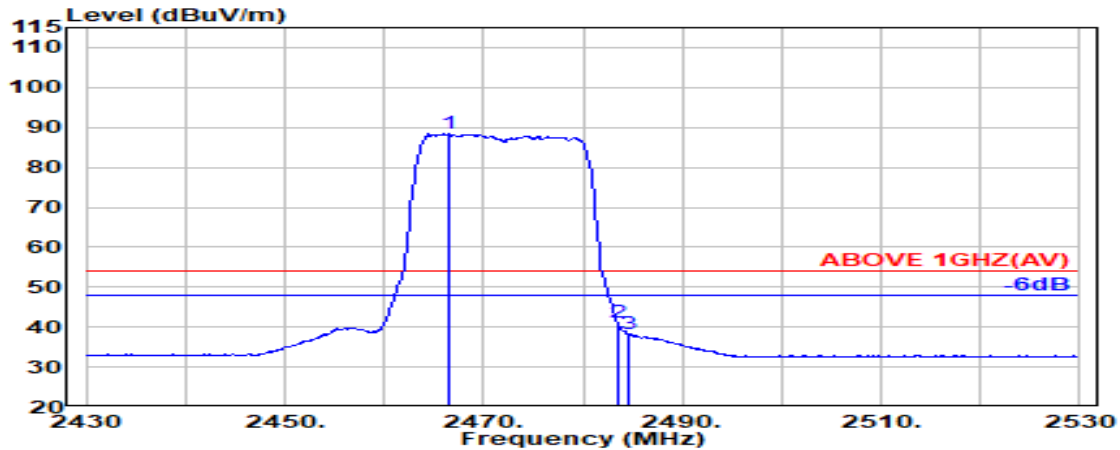


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	28.43	6.14	34.52	88.53	88.58	---	---	Average
2483.500	28.47	6.17	34.53	40.99	41.10	54.00	12.90	Average
2484.500	28.47	6.17	34.53	38.20	38.31	54.00	15.69	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

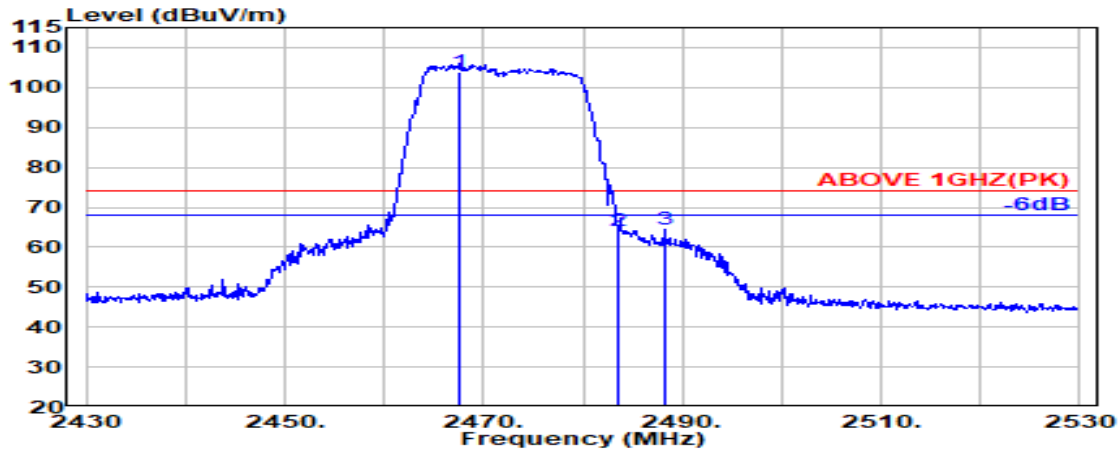

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.44	6.14	34.52	103.84	103.89	---	---	Peak
2483.500	28.47	6.17	34.53	64.03	64.14	74.00	9.86	Peak
2488.200	28.48	6.17	34.53	64.23	64.35	74.00	9.65	Peak

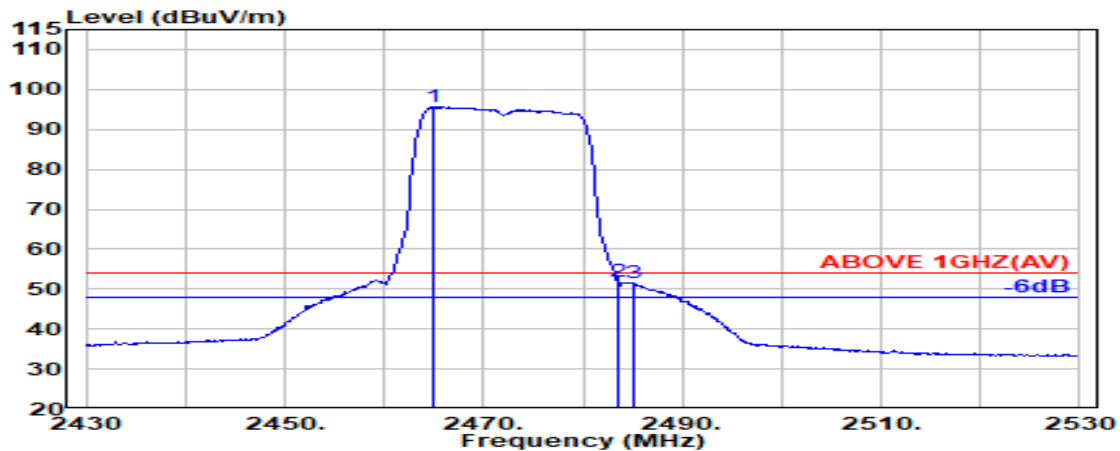


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.43	6.14	34.52	95.59	95.64	---	---	Average
2483.500	28.47	6.17	34.53	51.79	51.90	54.00	2.10	Average
2485.100	28.47	6.17	34.53	51.60	51.71	54.00	2.29	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

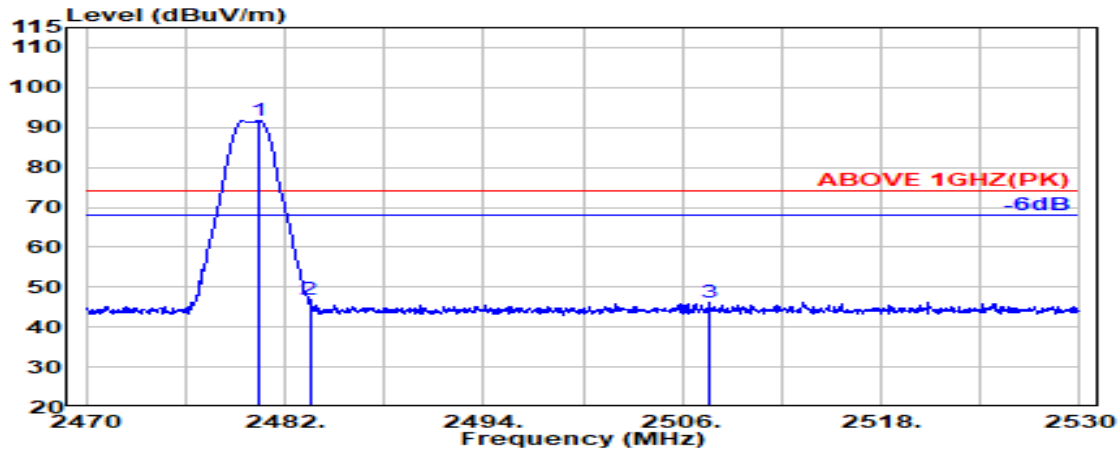

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.46	6.16	34.53	91.57	91.67	---	---	Peak
2483.500	28.47	6.17	34.53	46.74	46.84	74.00	27.16	Peak
2507.700	28.55	6.20	34.53	45.98	46.19	74.00	27.81	Peak

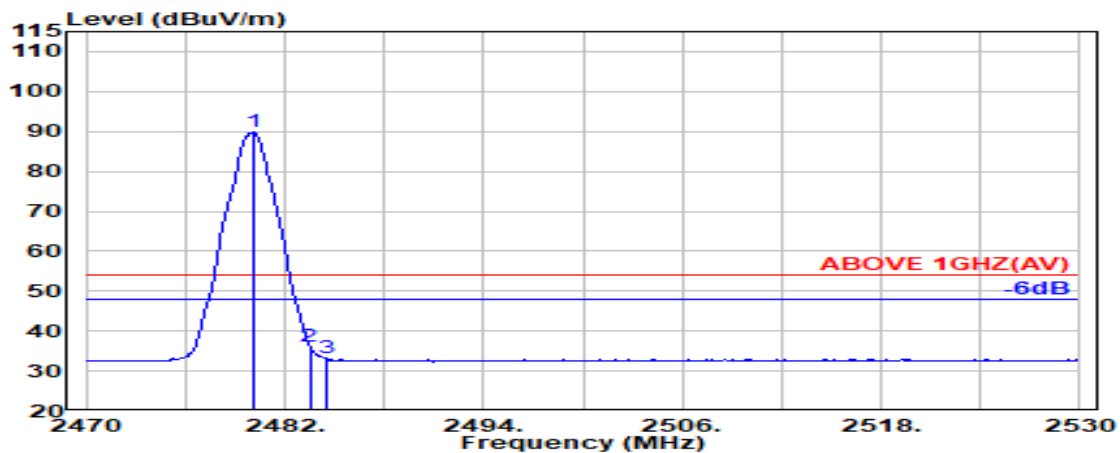


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	6.16	34.53	89.67	89.76	---	---	Average
2483.500	28.47	6.17	34.53	36.18	36.28	54.00	17.72	Average
2484.550	28.47	6.17	34.53	33.10	33.21	54.00	20.79	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

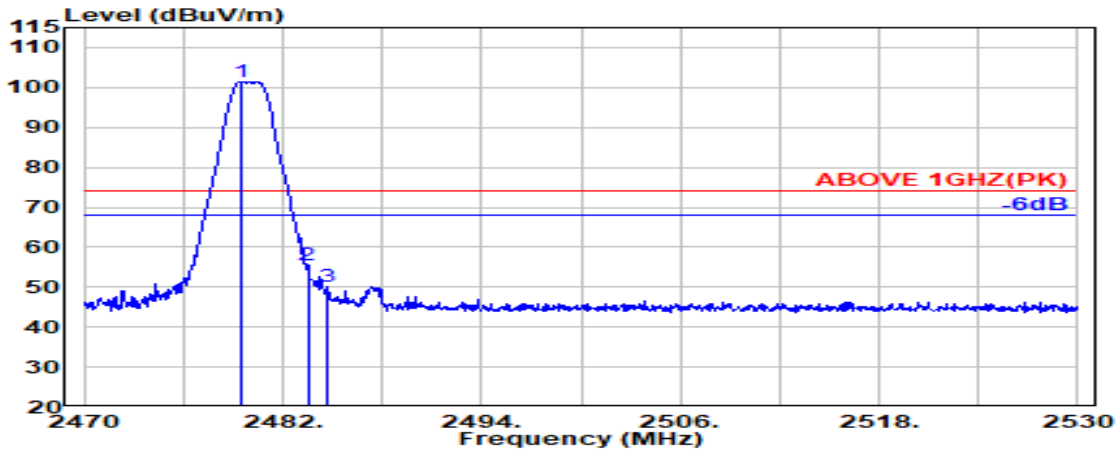

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.46	6.16	34.53	101.45	101.55	---	---	Peak
2483.500	28.47	6.17	34.53	55.49	55.59	74.00	18.41	Peak
2484.700	28.47	6.17	34.53	50.05	50.16	74.00	23.84	Peak

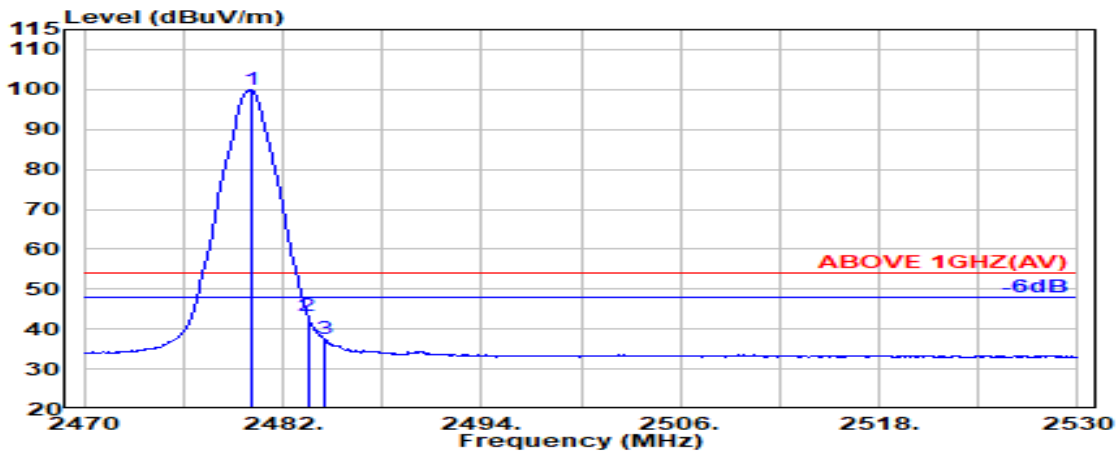

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.53	99.87	99.96	---	---	Average
2483.500	28.47	6.17	34.53	43.10	43.21	54.00	10.79	Average
2484.500	28.47	6.17	34.53	37.36	37.47	54.00	16.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.35	8.40	34.41	35.68	43.02	54.00	10.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.35	8.40	34.41	36.30	43.64	54.00	10.36	Peak

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	35.85	43.16	54.00	10.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	36.60	43.90	54.00	10.10	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	33.09	8.35	34.43	35.93	42.94	54.00	11.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	33.09	8.35	34.43	35.85	42.86	54.00	11.14	Peak

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.42	35.56	42.70	54.00	11.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.42	35.95	43.09	54.00	10.91	Peak

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	35.39	42.70	54.00	11.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	35.93	43.24	54.00	10.76	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.42	35.56	42.75	54.00	11.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.42	35.44	42.63	54.00	11.37	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.43	35.64	42.54	54.00	11.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.43	37.96	44.86	54.00	9.14	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2440MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.42	36.33	43.51	54.00	10.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.42	36.14	43.31	54.00	10.69	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2480MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.41	35.42	42.84	54.00	11.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.41	36.21	43.63	54.00	10.37	Peak

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.35	8.40	34.41	36.03	43.37	54.00	10.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.35	8.40	34.41	36.88	44.21	54.00	9.79	Peak

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	37.25	44.56	54.00	9.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	37.08	44.39	54.00	9.61	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	33.09	8.35	34.43	36.95	43.96	54.00	10.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	33.09	8.35	34.43	36.10	43.11	54.00	10.89	Peak

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.42	36.12	43.26	54.00	10.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.42	36.85	43.99	54.00	10.01	Peak

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	37.02	44.33	54.00	9.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	37.94	45.25	54.00	8.75	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.42	36.81	44.00	54.00	10.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.42	36.47	43.66	54.00	10.34	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.43	38.07	44.97	54.00	9.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.43	37.63	44.52	54.00	9.48	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2440MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.42	35.42	42.59	54.00	11.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.42	36.00	43.18	54.00	10.82	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2480MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.41	35.69	43.11	54.00	10.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.41	36.25	43.66	54.00	10.34	Peak

Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	35.35	42.66	54.00	11.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	36.87	44.18	54.00	9.82	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.43	35.87	42.77	54.00	11.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.43	36.09	42.99	54.00	11.01	Peak

Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	35.75	43.06	54.00	10.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.33	8.40	34.41	35.52	42.83	54.00	11.17	Peak

Mode	BLE (PHY Coded S8)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.43	37.22	44.12	54.00	9.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.43	36.76	43.66	54.00	10.34	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.