


## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>6</b>
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	309
A.2.3 Emissions in Non-restricted Frequency Bands.....	341
<b>A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH</b> .....	<b>342</b>
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	342
A.3.2 Measurement Plots .....	352
<b>A.4 POWER SPECTRAL DENSITY</b> .....	<b>391</b>
A.4.1 Power Spectral Density Result .....	391
A.4.2 Measurement Plots .....	400
<b>A.5 FREQUENCY STABILITY</b> .....	<b>442</b>
A.5.1 Frequency stability Result .....	442

## A.1 CONDUCTED EMISSION

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1(with INPOAQ ANT)		

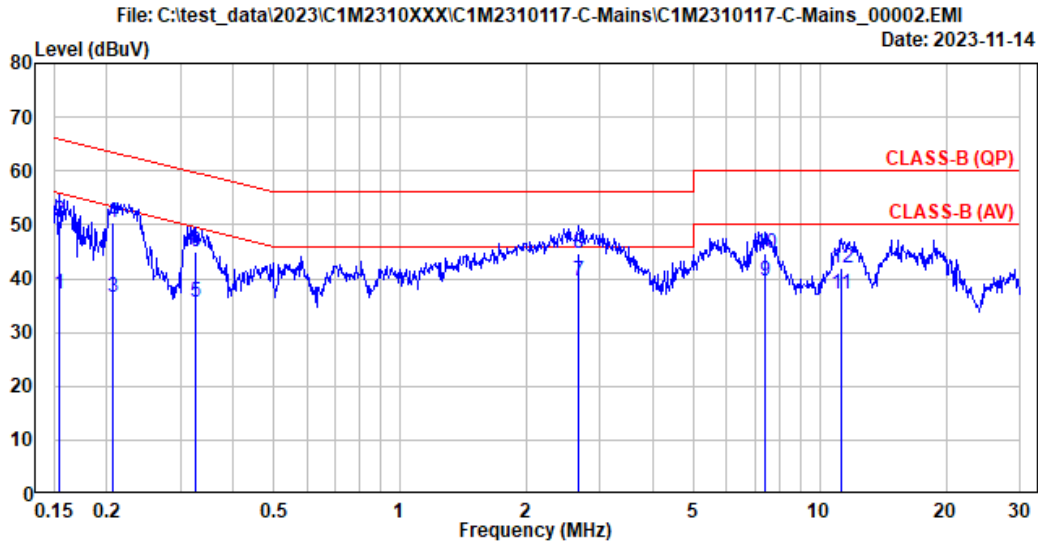

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.30	0.03	9.85	16.83	37.01	55.79	18.78	Average
2	0.154	10.30	0.03	9.85	30.40	50.58	65.79	15.21	QP
3	0.207	10.29	0.03	9.85	16.43	36.60	53.31	16.71	Average
4	0.207	10.29	0.03	9.85	30.30	50.47	63.31	12.84	QP
5	0.325	10.28	0.03	9.85	15.61	35.77	49.58	13.81	Average
6	0.325	10.28	0.03	9.85	24.82	44.98	59.58	14.60	QP
7	2.661	10.34	0.07	9.86	19.42	39.69	46.00	6.31	Average
8	2.661	10.34	0.07	9.86	24.49	44.76	56.00	11.24	QP
9	7.430	10.50	0.11	9.87	19.17	39.65	50.00	10.35	Average
10	7.430	10.50	0.11	9.87	24.31	44.79	60.00	15.21	QP
11	11.238	10.64	0.15	9.90	16.38	37.07	50.00	12.93	Average
12	11.238	10.64	0.15	9.90	21.37	42.06	60.00	17.94	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1(with INPOAQ ANT)		

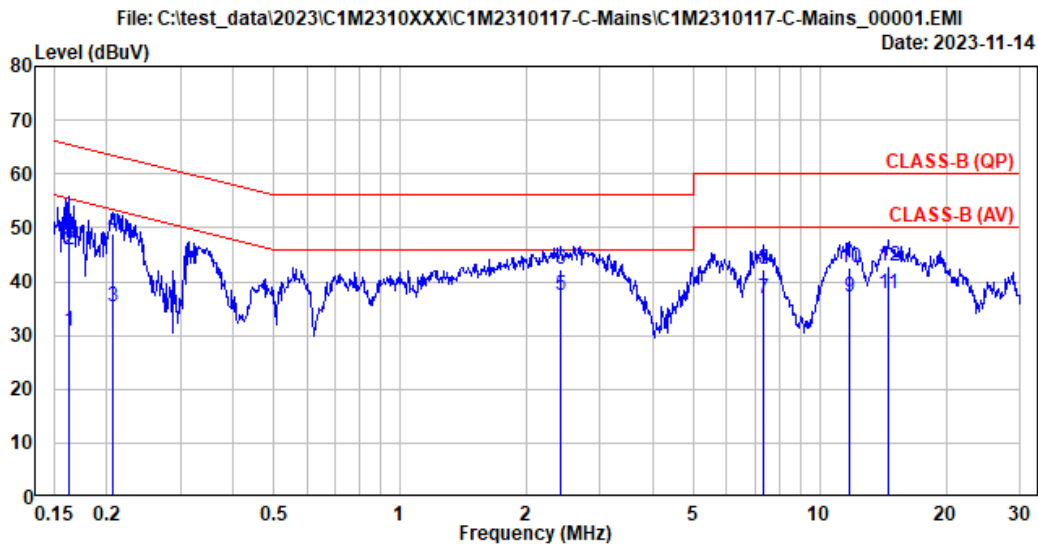


Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.29	0.03	9.85	10.52	30.69	55.34	24.65	Average
2	0.162	10.29	0.03	9.85	25.70	45.87	65.34	19.47	QP
3	0.207	10.28	0.03	9.85	15.27	35.43	53.31	17.88	Average
4	0.207	10.28	0.03	9.85	28.79	48.95	63.31	14.36	QP
5	2.421	10.31	0.07	9.86	17.07	37.31	46.00	8.69	Average
6	2.421	10.31	0.07	9.86	21.92	42.16	56.00	13.84	QP
7	7.320	10.42	0.11	9.87	16.34	36.74	50.00	13.26	Average
8	7.320	10.42	0.11	9.87	21.74	42.14	60.00	17.86	QP
9	11.812	10.52	0.15	9.90	16.63	37.20	50.00	12.80	Average
10	11.812	10.52	0.15	9.90	22.03	42.60	60.00	17.40	QP
11	14.563	10.60	0.17	9.91	17.08	37.76	50.00	12.24	Average
12	14.563	10.60	0.17	9.91	22.28	42.96	60.00	17.04	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2(with LUXSHARE-ICT ANT)		

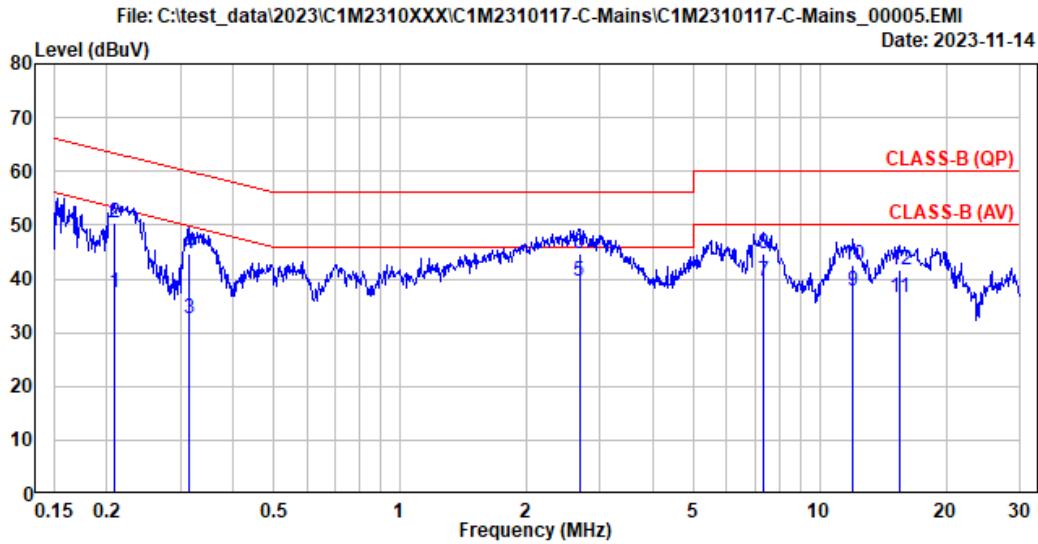

Site No.	: No.8 Shielded Room	Data No.	: 5
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.208	10.29	0.03	9.85	17.27	37.44	53.27	15.83	Average
2	0.208	10.29	0.03	9.85	30.37	50.54	63.27	12.73	QP
3	0.315	10.28	0.03	9.85	12.39	32.55	49.83	17.28	Average
4	0.315	10.28	0.03	9.85	24.40	44.56	59.83	15.27	QP
5	2.675	10.34	0.07	9.86	19.40	39.67	46.00	6.33	Average
6	2.675	10.34	0.07	9.86	24.49	44.76	56.00	11.24	QP
7	7.320	10.50	0.11	9.87	19.14	39.62	50.00	10.38	Average
8	7.320	10.50	0.11	9.87	24.31	44.79	60.00	15.21	QP
9	11.990	10.68	0.15	9.90	16.95	37.68	50.00	12.32	Average
10	11.990	10.68	0.15	9.90	21.87	42.60	60.00	17.40	QP
11	15.460	10.83	0.17	9.91	15.67	36.58	50.00	13.42	Average
12	15.460	10.83	0.17	9.91	20.85	41.76	60.00	18.24	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2(with LUXSHARE-ICT ANT)		

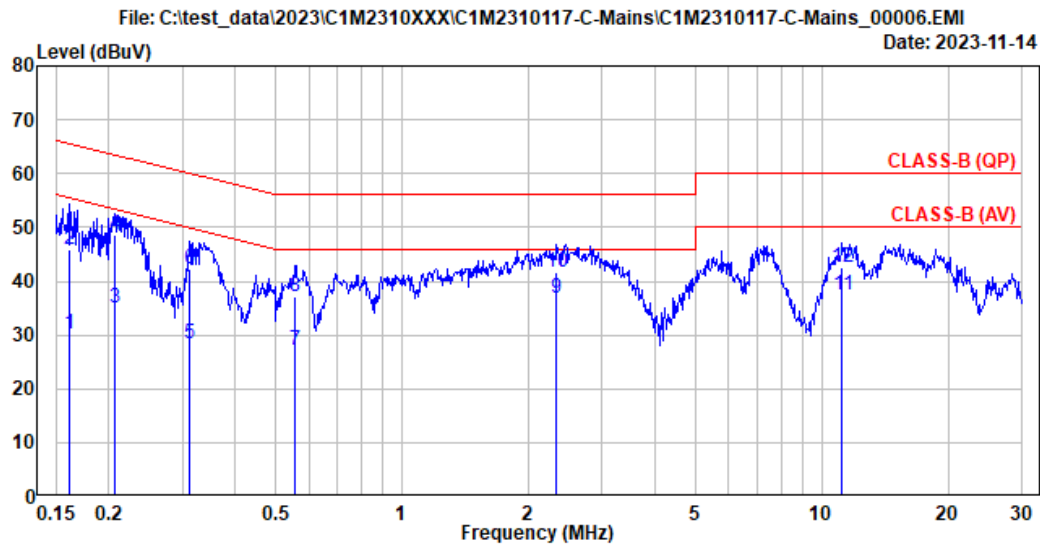

Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.161	10.30	0.03	9.85	10.13	30.31	55.42	25.11	Average
2	0.161	10.30	0.03	9.85	25.84	46.02	65.42	19.40	QP
3	0.207	10.28	0.03	9.85	14.82	34.98	53.31	18.33	Average
4	0.207	10.28	0.03	9.85	28.46	48.62	63.31	14.69	QP
5	0.312	10.27	0.03	9.85	8.23	28.38	49.91	21.53	Average
6	0.312	10.27	0.03	9.85	22.08	42.23	59.91	17.68	QP
7	0.554	10.27	0.03	9.85	6.92	27.07	46.00	18.93	Average
8	0.554	10.27	0.03	9.85	16.83	36.98	56.00	19.02	QP
9	2.338	10.31	0.06	9.86	16.63	36.86	46.00	9.14	Average
10	2.338	10.31	0.06	9.86	21.33	41.56	56.00	14.44	QP
11	11.182	10.50	0.15	9.90	16.86	37.41	50.00	12.59	Average
12	11.182	10.50	0.15	9.90	21.89	42.44	60.00	17.56	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

## A.2 RADIATED EMISSION

Test Date	2023/10/23 ~ 11/14	Temp./Hum.	23 ~ 25°C/52 ~ 56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz.

Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	36.98	33.98	40.00	6.02	Peak
148.825	16.64	2.86	26.02	43.35	36.83	43.50	6.67	Peak
321.808	19.55	4.64	25.87	33.36	31.68	46.00	14.32	Peak
445.483	22.32	5.94	26.82	40.67	42.10	46.00	3.90	Peak
540.058	23.63	6.55	27.27	33.14	36.06	46.00	9.94	Peak
641.908	24.49	7.00	27.41	32.90	36.99	46.00	9.01	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.658	21.78	1.31	0.00	14.72	37.80	40.00	2.20	QP
78.500	12.89	2.02	26.37	42.71	31.24	40.00	8.76	Peak
148.825	16.64	2.86	26.02	45.24	38.72	43.50	4.78	Peak
345.250	20.22	4.92	26.08	33.56	32.62	46.00	13.38	Peak
445.483	22.32	5.94	26.82	40.34	41.77	46.00	4.23	Peak
594.217	24.27	6.74	27.40	35.18	38.80	46.00	7.20	Peak

Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
37.275	20.87	1.34	26.51	34.05	29.75	40.00	10.25	Peak
148.825	16.64	2.86	26.02	43.94	37.41	43.50	6.09	Peak
445.483	22.32	5.94	26.82	40.23	41.66	46.00	4.34	Peak
548.142	23.74	6.58	27.29	31.94	34.98	46.00	11.02	Peak
618.467	24.40	6.87	27.41	32.26	36.12	46.00	9.88	Peak
717.892	24.75	7.42	27.38	32.21	37.00	46.00	9.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	14.16	37.67	40.00	2.33	QP
83.350	13.66	2.09	26.36	40.89	30.27	40.00	9.73	Peak
124.575	17.70	2.59	26.15	36.04	30.18	43.50	13.32	Peak
148.825	16.64	2.86	26.02	45.22	38.70	43.50	4.80	Peak
445.483	22.32	5.94	26.82	40.78	42.22	46.00	3.78	Peak
594.217	24.27	6.74	27.40	34.76	38.38	46.00	7.62	Peak

Spot Check with SKU #2 (with INAPQ ANT)

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	38.05	35.04	40.00	4.96	Peak
148.825	16.64	2.86	26.02	43.41	36.89	43.50	6.61	Peak
312.108	19.28	4.52	25.78	33.76	31.78	46.00	14.22	Peak
418.000	21.87	5.69	26.64	32.86	33.79	46.00	12.21	Peak
445.483	22.32	5.94	26.82	39.81	41.24	46.00	4.76	Peak
548.950	23.76	6.58	27.29	32.21	35.26	46.00	10.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	13.76	37.27	40.00	2.73	QP
148.825	16.64	2.86	26.02	45.93	39.41	43.50	4.09	Peak
345.250	20.22	4.92	26.08	33.51	32.57	46.00	13.43	Peak
445.483	22.32	5.94	26.82	40.66	42.09	46.00	3.91	Peak
540.058	23.63	6.55	27.27	33.24	36.16	46.00	9.84	Peak
594.217	24.27	6.74	27.40	33.82	37.44	46.00	8.56	Peak



Spot Check with SKU #2 (with LUXSHARE-ICT ANT)

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.042	22.48	1.28	26.51	34.94	32.18	40.00	7.82	Peak
148.825	16.64	2.86	26.02	43.77	37.25	43.50	6.25	Peak
318.575	19.46	4.60	25.84	33.82	32.04	46.00	13.96	Peak
445.483	22.32	5.94	26.82	39.85	41.28	46.00	4.72	Peak
540.058	23.63	6.55	27.27	34.02	36.93	46.00	9.07	Peak
626.550	24.43	6.91	27.41	32.31	36.25	46.00	9.75	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.658	21.78	1.31	0.00	14.05	37.14	40.00	2.86	QP
80.925	13.17	2.05	26.36	41.07	29.93	40.00	10.07	Peak
148.825	16.64	2.86	26.02	45.10	38.58	43.50	4.92	Peak
345.250	20.22	4.92	26.08	33.83	32.89	46.00	13.11	Peak
445.483	22.32	5.94	26.82	40.10	41.53	46.00	4.47	Peak
594.217	24.27	6.74	27.40	34.82	38.43	46.00	7.57	Peak

A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics

**Band Edge:**


Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

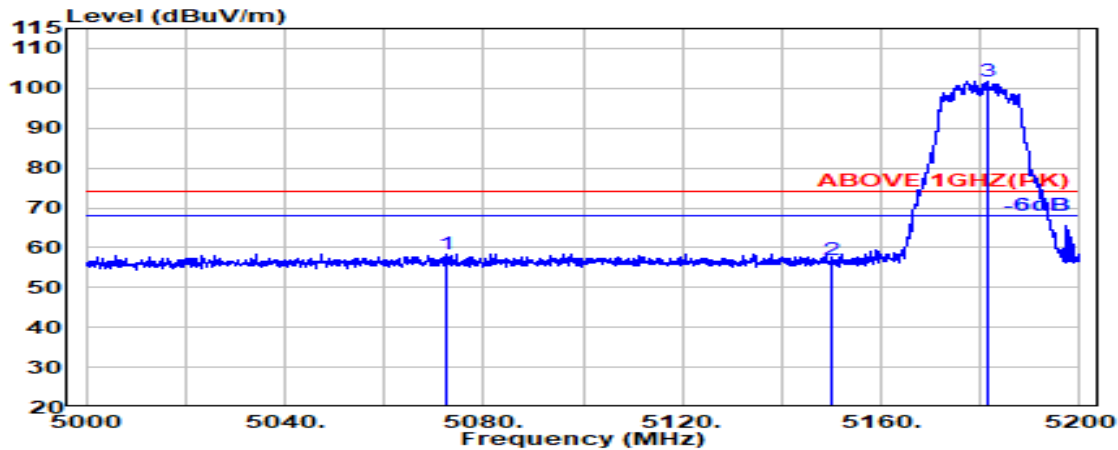

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5072.700	33.59	8.50	34.37	50.80	58.52	74.00	15.48	Peak
5150.000	33.70	8.54	34.34	49.11	57.02	74.00	16.98	Peak
@ 5181.700	33.70	8.56	34.33	93.77	101.71	---	---	Peak

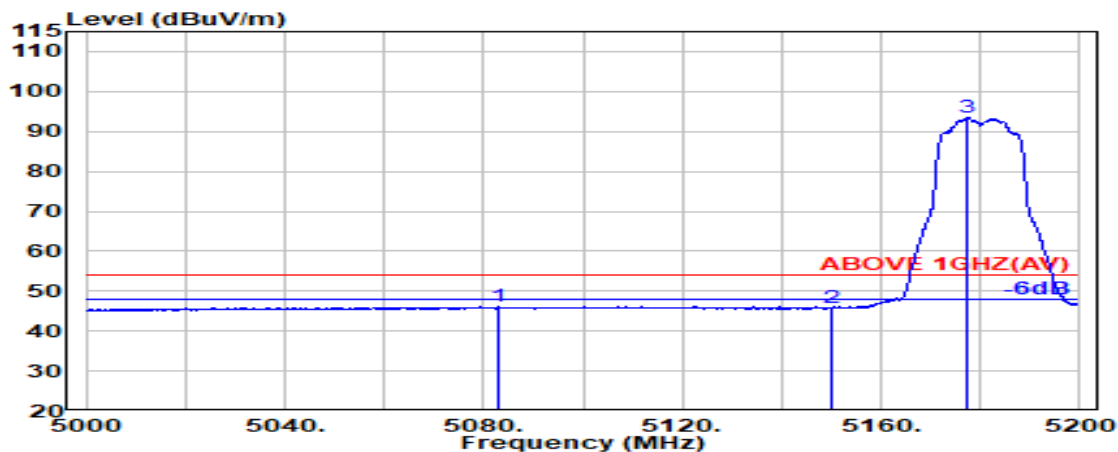


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5083.100	33.63	8.50	34.37	38.37	46.14	54.00	7.86	Average
5150.000	33.70	8.54	34.34	37.80	45.70	54.00	8.30	Average
@ 5177.500	33.70	8.56	34.33	85.45	93.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

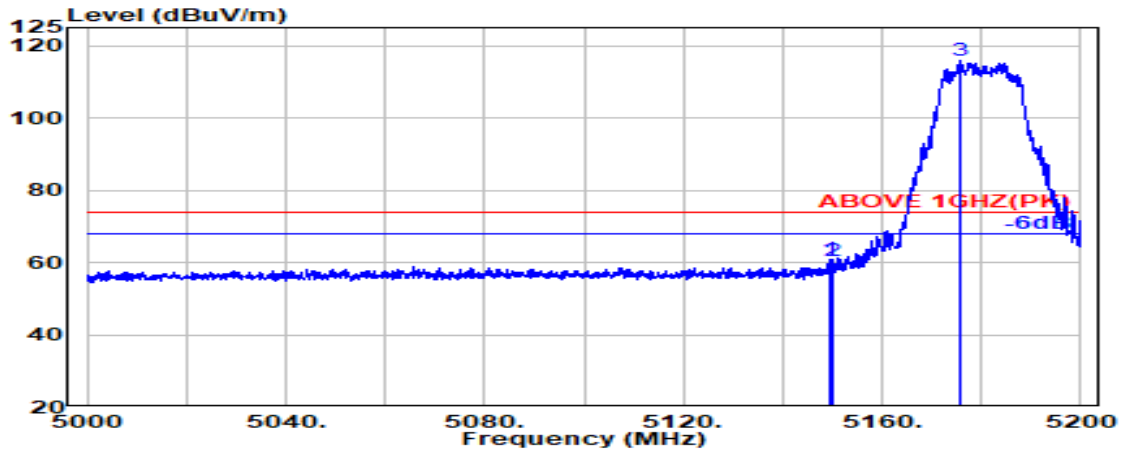

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.34	52.84	60.75	74.00	13.25	Peak
5150.000	33.70	8.54	34.34	52.32	60.23	74.00	13.77	Peak
@ 5175.500	33.70	8.56	34.33	107.76	115.69	---	---	Peak

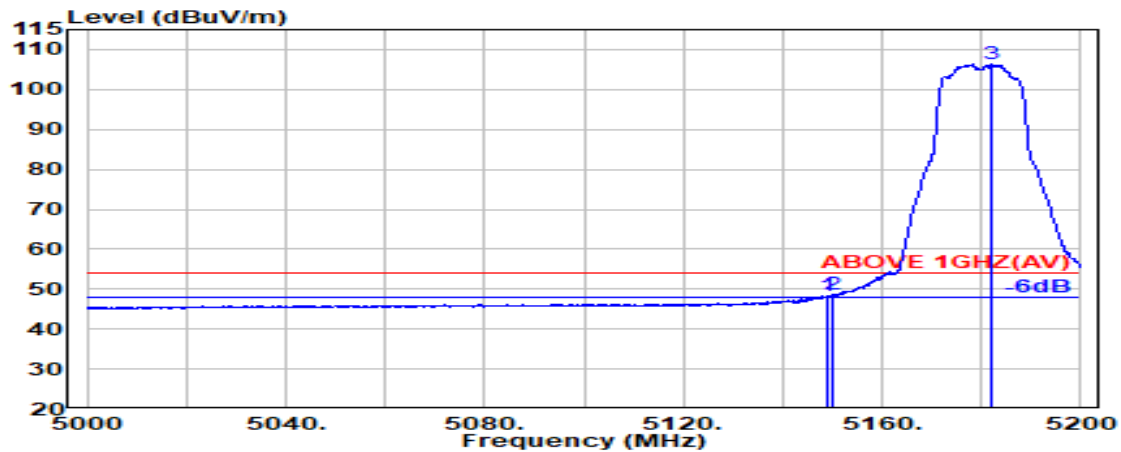


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.70	8.54	34.34	40.46	48.36	54.00	5.64	Average
5150.000	33.70	8.54	34.34	40.61	48.51	54.00	5.49	Average
@ 5182.000	33.70	8.56	34.32	98.45	106.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

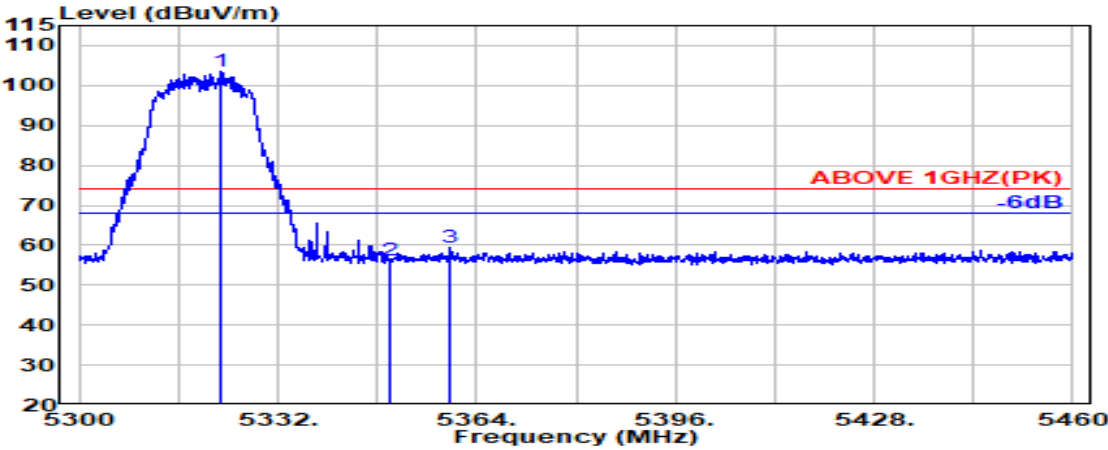

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	34.01	8.65	34.27	94.98	103.37	---	---	Peak
5350.000	33.90	8.67	34.26	47.88	56.18	74.00	17.82	Peak
5359.800	33.94	8.67	34.25	51.00	59.36	74.00	14.64	Peak

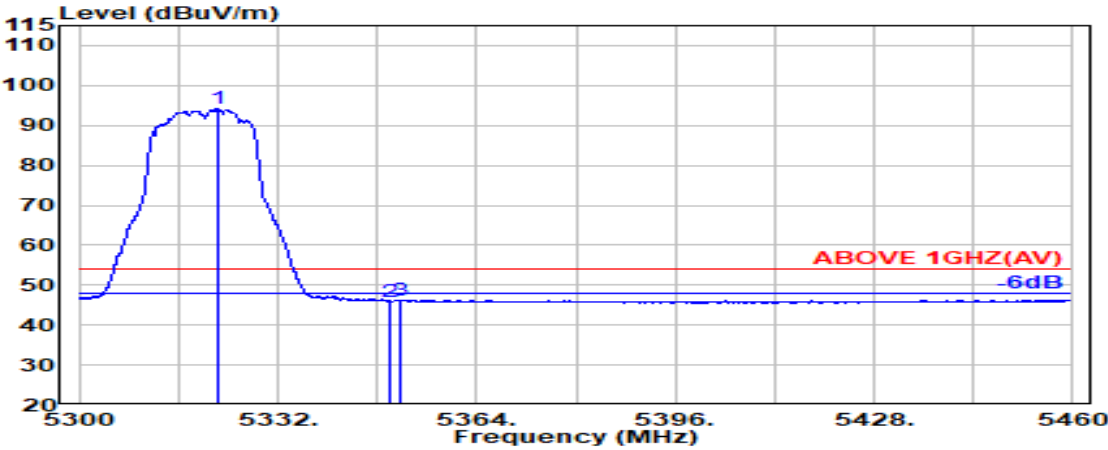


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.200	34.01	8.65	34.27	85.79	94.19	---	---	Average
5350.000	33.90	8.67	34.26	37.67	45.98	54.00	8.02	Average
5351.800	33.91	8.67	34.26	37.93	46.25	54.00	7.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

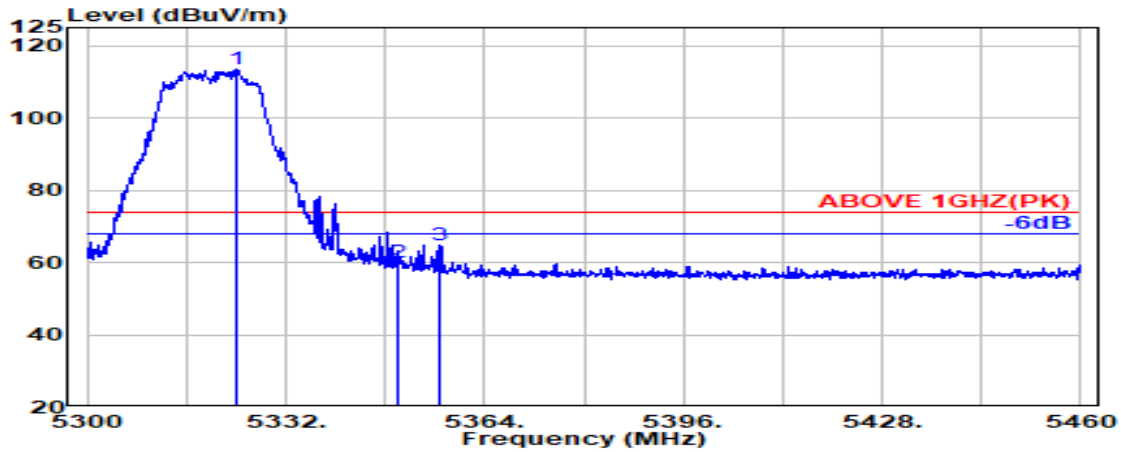

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	34.00	8.65	34.27	105.28	113.66	---	---	Peak
5350.000	33.90	8.67	34.26	51.81	60.12	74.00	13.88	Peak
5356.700	33.93	8.67	34.26	56.34	64.68	74.00	9.32	Peak

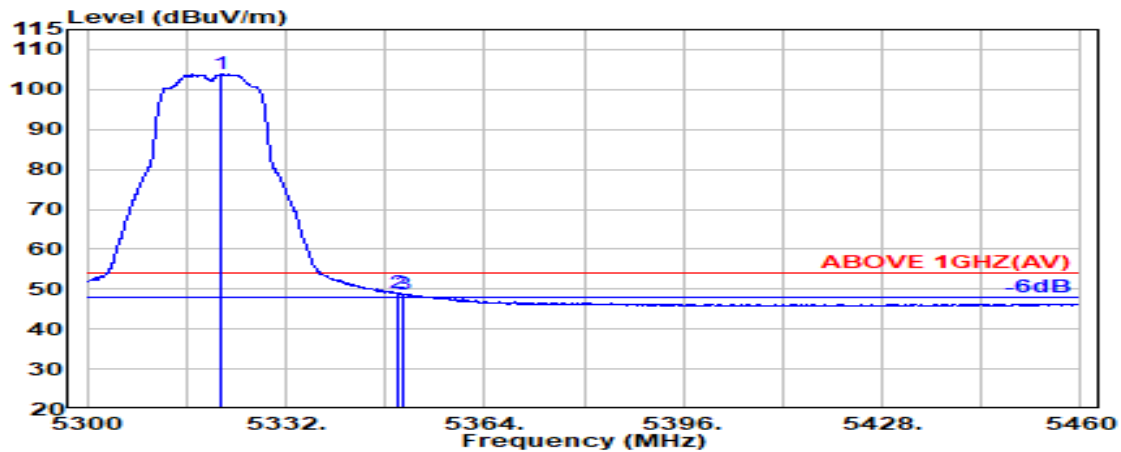


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.600	34.01	8.65	34.27	95.41	103.80	---	---	Average
5350.000	33.90	8.67	34.26	40.60	48.90	54.00	5.10	Average
5350.700	33.90	8.67	34.26	40.54	48.85	54.00	5.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

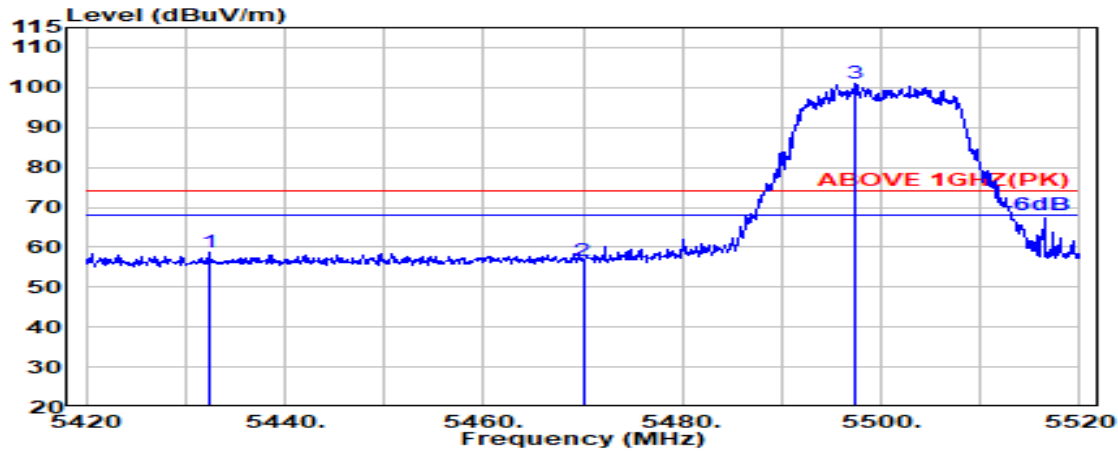

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.300	34.16	8.71	34.23	49.99	58.64	74.00	15.36	Peak
5470.000	34.16	8.74	34.21	47.88	56.57	74.00	17.43	Peak
@ 5497.400	34.11	8.75	34.20	92.19	100.85	---	---	Peak

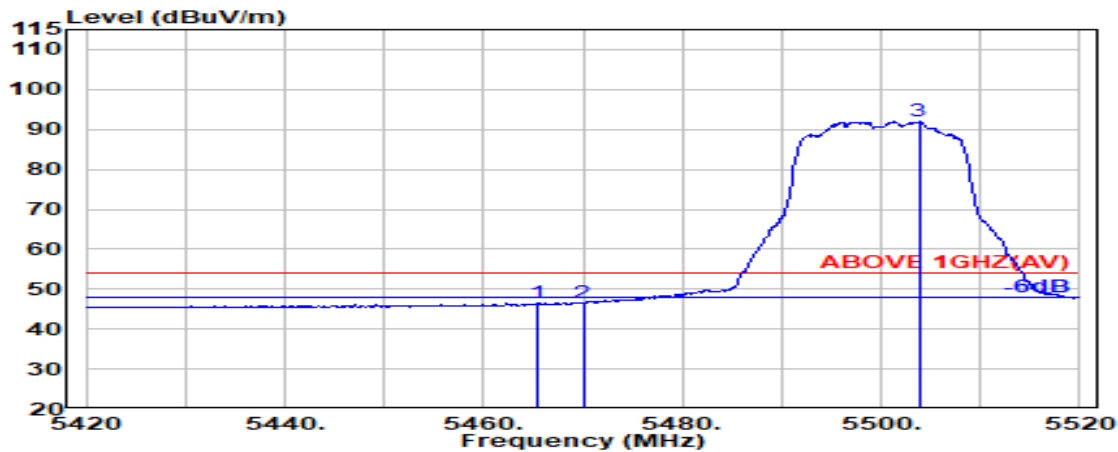


## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.17	8.73	34.21	37.89	46.58	54.00	7.42	Average
5470.000	34.16	8.74	34.21	37.93	46.62	54.00	7.38	Average
@ 5503.800	34.10	8.76	34.20	83.30	91.96	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

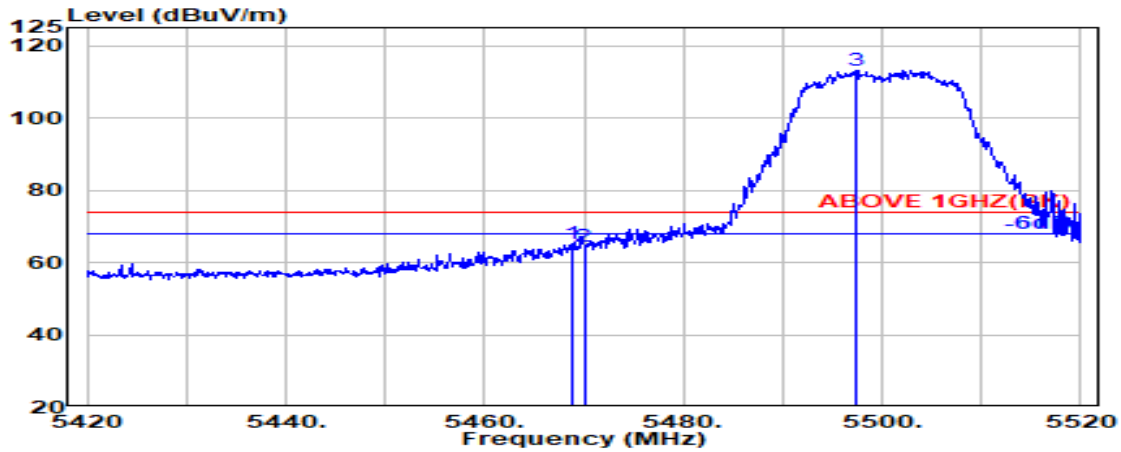

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.21	56.53	65.21	74.00	8.79	Peak
5470.000	34.16	8.74	34.21	55.78	64.46	74.00	9.54	Peak
@ 5497.400	34.11	8.75	34.20	104.58	113.23	---	---	Peak

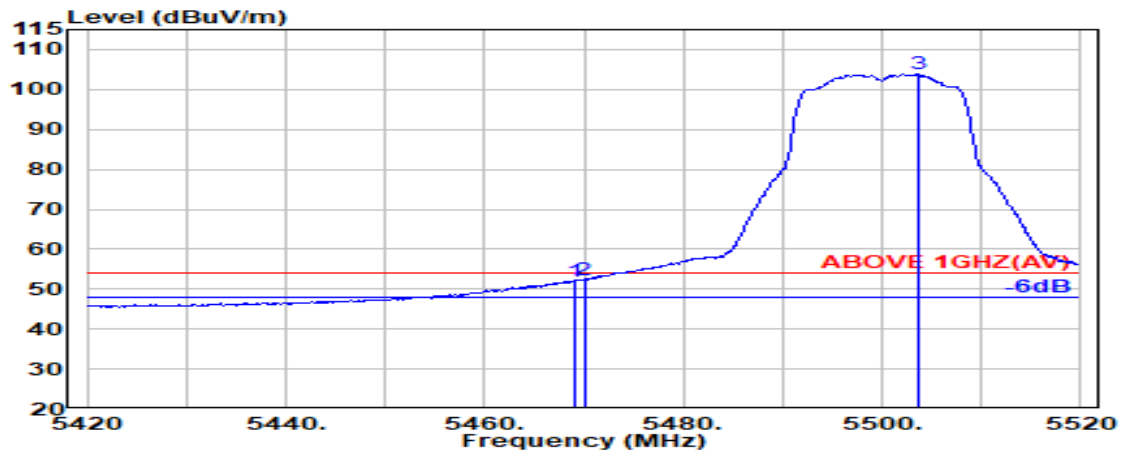


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.21	43.24	51.92	54.00	2.08	Average
5470.000	34.16	8.74	34.21	43.67	52.36	54.00	1.64	Average
@ 5503.600	34.10	8.76	34.20	95.19	103.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

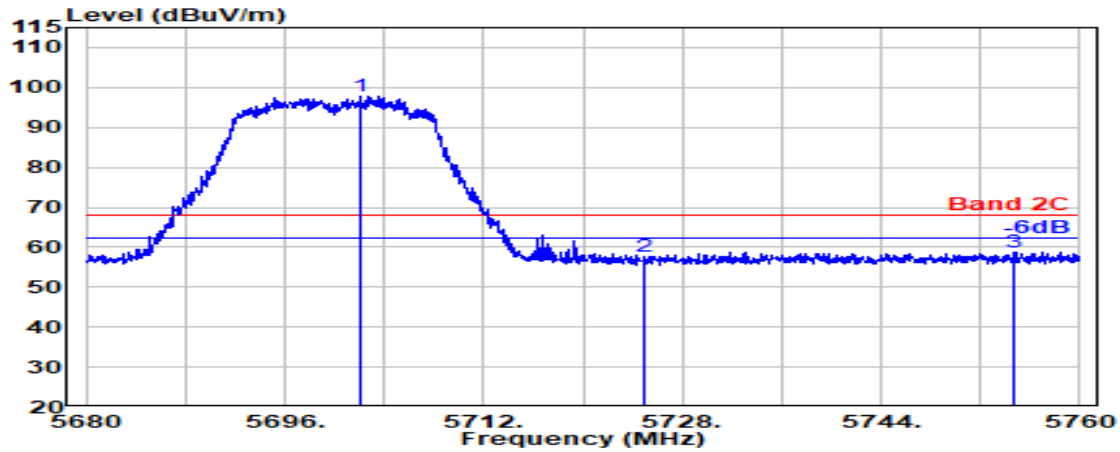

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.100	33.80	8.87	34.30	89.55	97.92	---	---	Peak
5725.000	33.80	8.88	34.31	49.35	57.72	68.20	10.48	Peak
5754.750	33.82	8.90	34.32	50.45	58.85	68.20	9.35	Peak

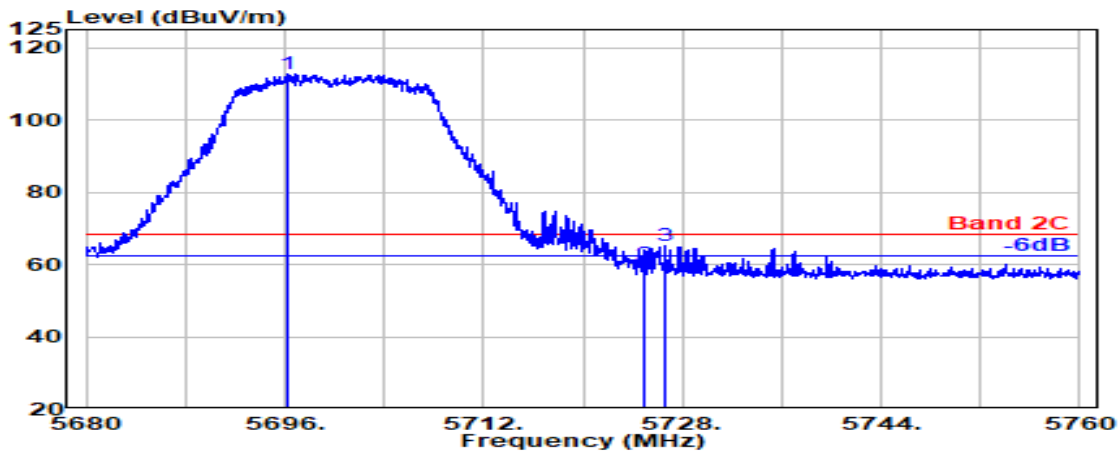


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.300	33.81	8.86	34.29	104.50	112.88	---	---	Peak
5725.000	33.80	8.88	34.31	51.60	59.98	68.20	8.22	Peak
5726.650	33.80	8.88	34.31	56.89	65.27	68.20	2.93	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

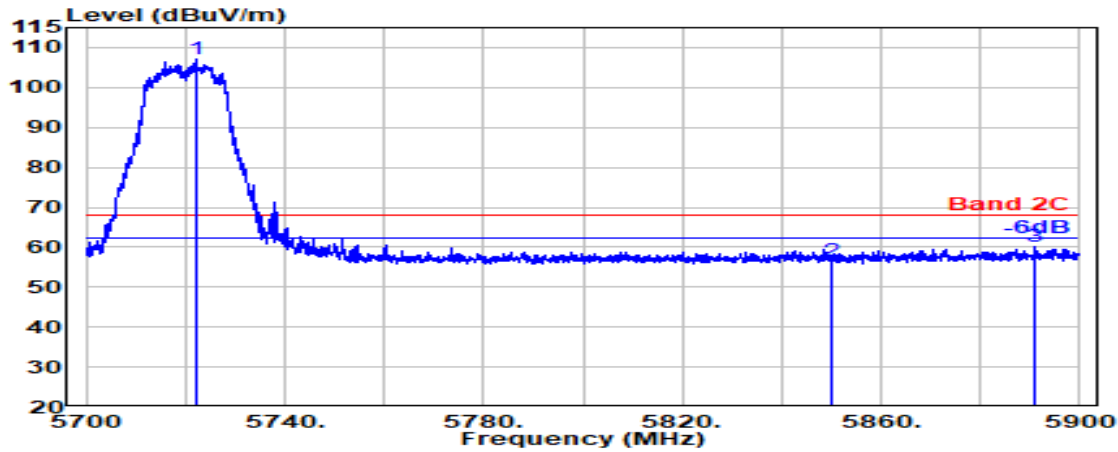

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5722.200	33.80	8.88	34.30	98.80	107.18	---	---	Peak
5850.000	34.10	8.95	34.36	47.93	56.62	68.20	11.58	Peak
5891.000	34.10	8.97	34.38	51.45	60.14	68.20	8.06	Peak

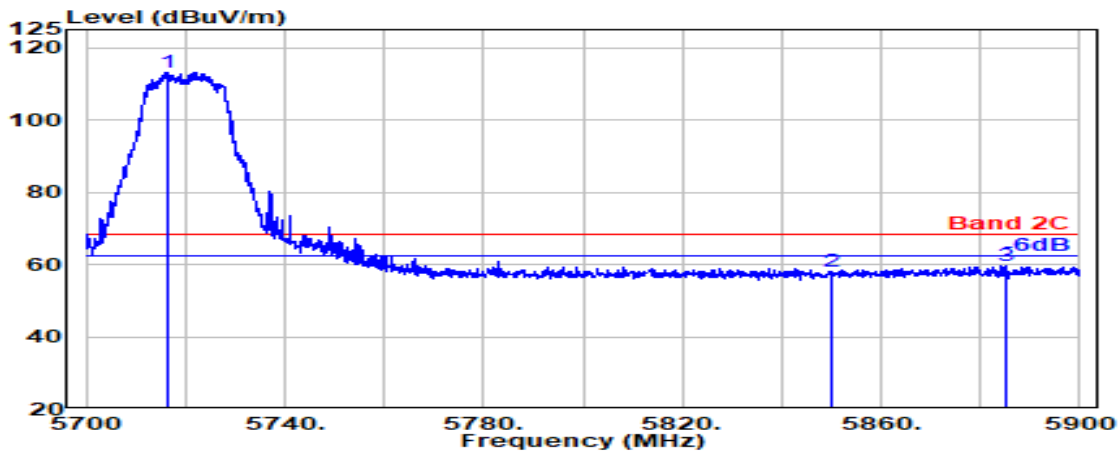


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5716.400	33.80	8.88	34.30	104.84	113.21	---	---	Peak
5850.000	34.10	8.95	34.36	49.28	57.97	68.20	10.23	Peak
5884.900	34.10	8.97	34.38	50.92	59.61	68.20	8.59	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

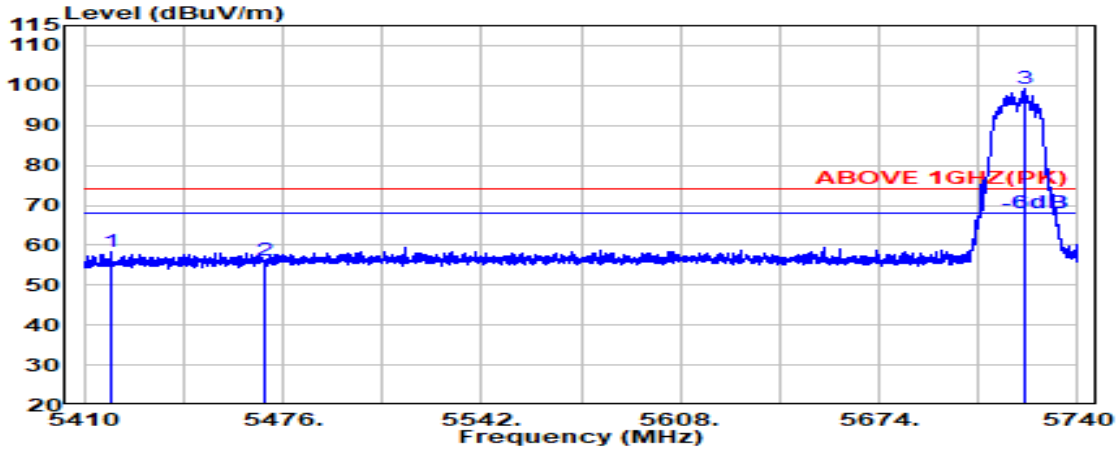

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5418.800	34.14	8.71	34.23	49.75	58.36	74.00	15.64	Peak
5470.000	34.16	8.74	34.21	47.42	56.11	74.00	17.89	Peak
@ 5722.400	33.80	8.88	34.30	90.82	99.19	---	---	Peak

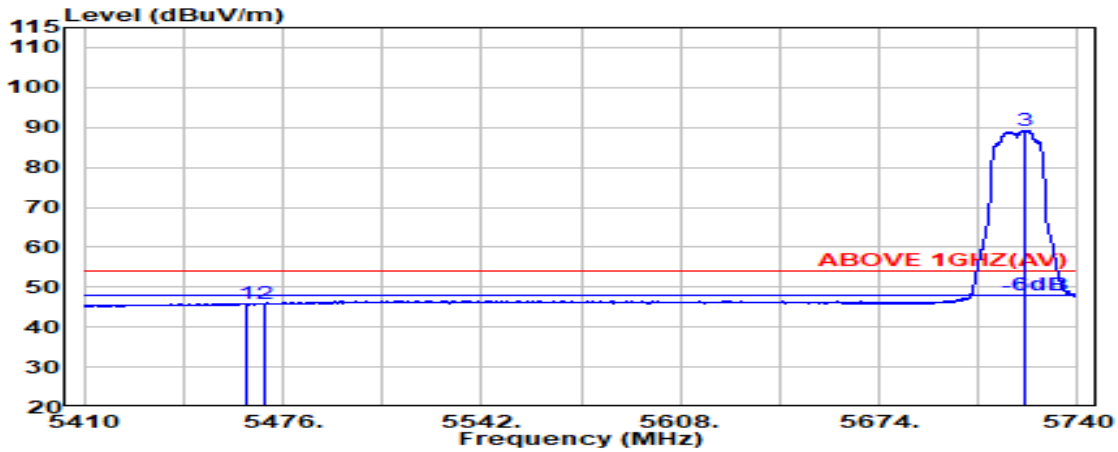


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.17	8.73	34.21	37.28	45.97	54.00	8.03	Average
5470.000	34.16	8.74	34.21	37.22	45.90	54.00	8.10	Average
@ 5722.000	33.80	8.88	34.30	80.86	89.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

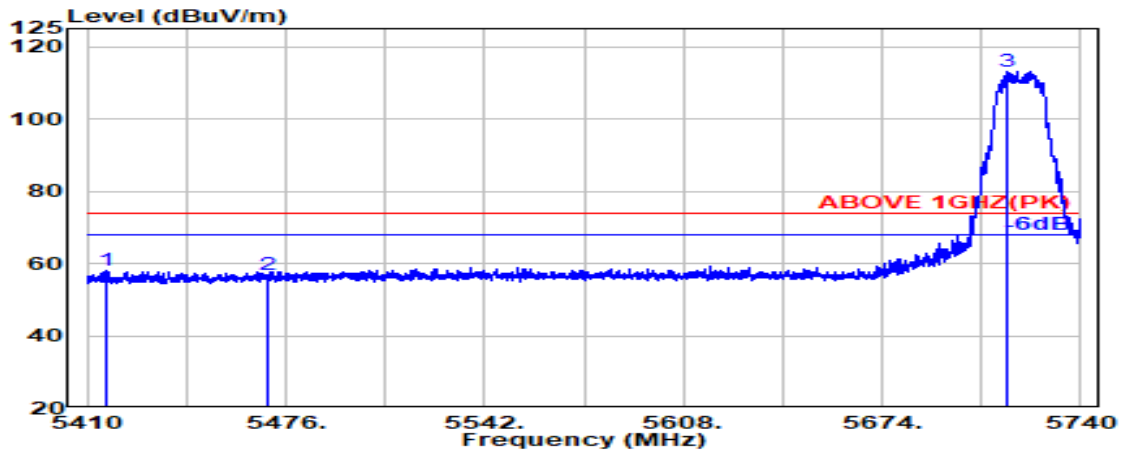

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5416.000	34.13	8.70	34.23	49.34	57.94	74.00	16.06	Peak
5470.000	34.16	8.74	34.21	48.16	56.84	74.00	17.16	Peak
@ 5715.400	33.80	8.88	34.30	104.70	113.07	---	---	Peak

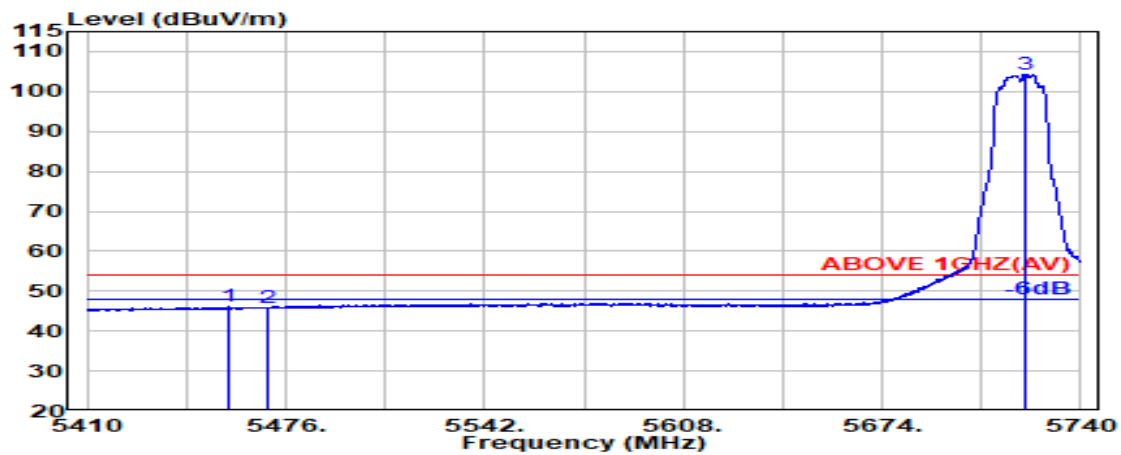


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.400	34.19	8.73	34.22	37.30	46.00	54.00	8.00	Average
5470.000	34.16	8.74	34.21	37.13	45.81	54.00	8.19	Average
@ 5721.300	33.80	8.88	34.30	95.81	104.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

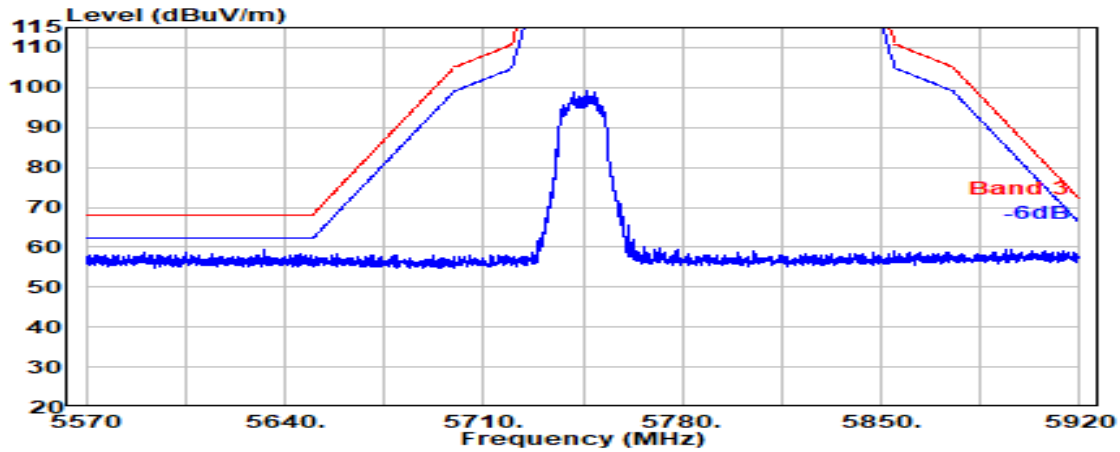


Antenna at Vertical Polarization

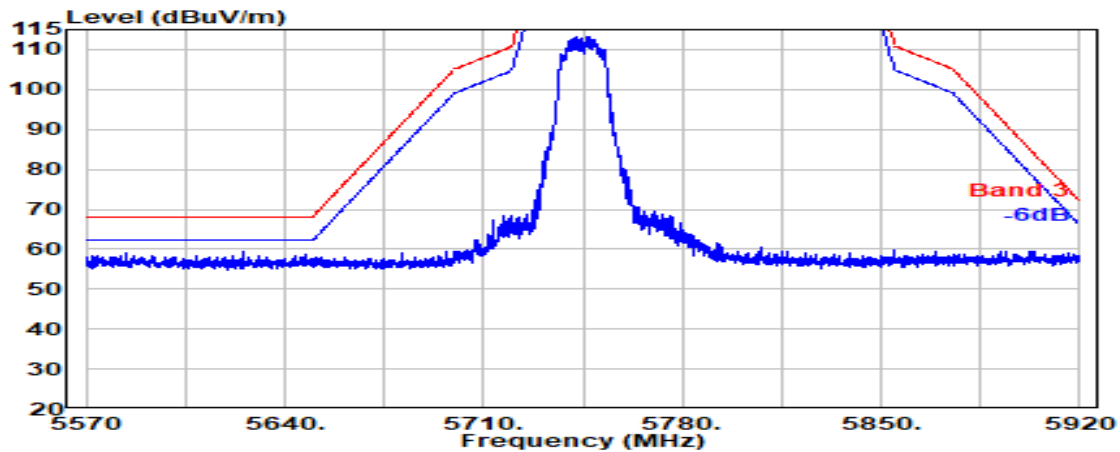


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


## Antenna at Horizontal Polarization

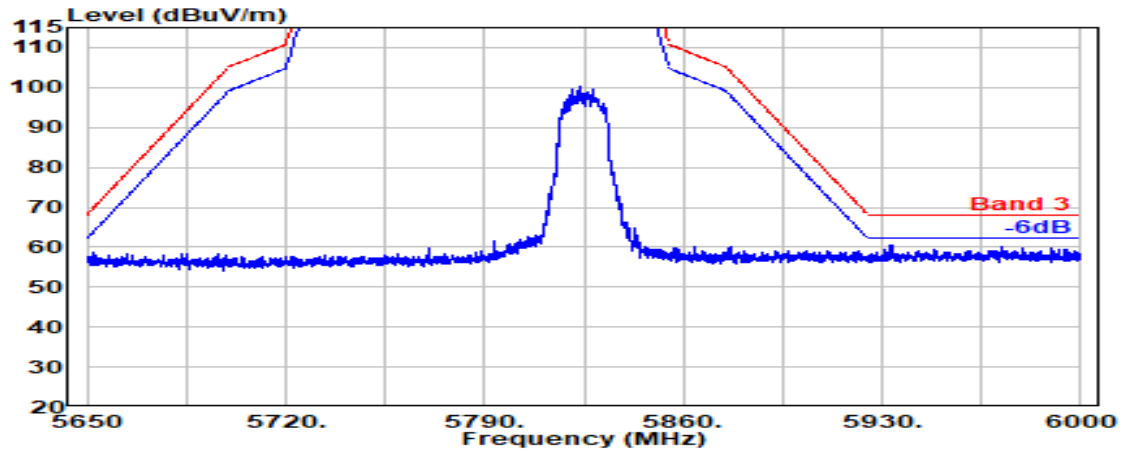

## Antenna at Vertical Polarization

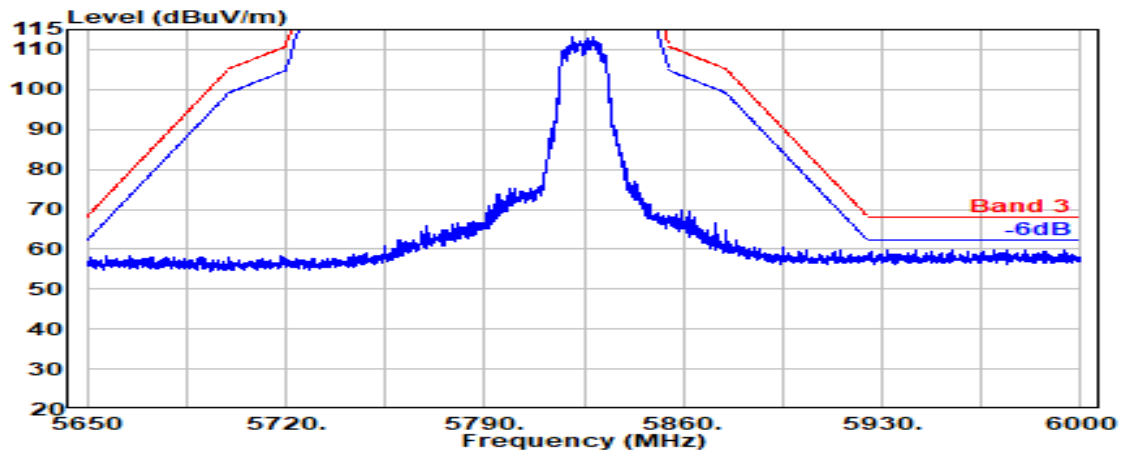


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

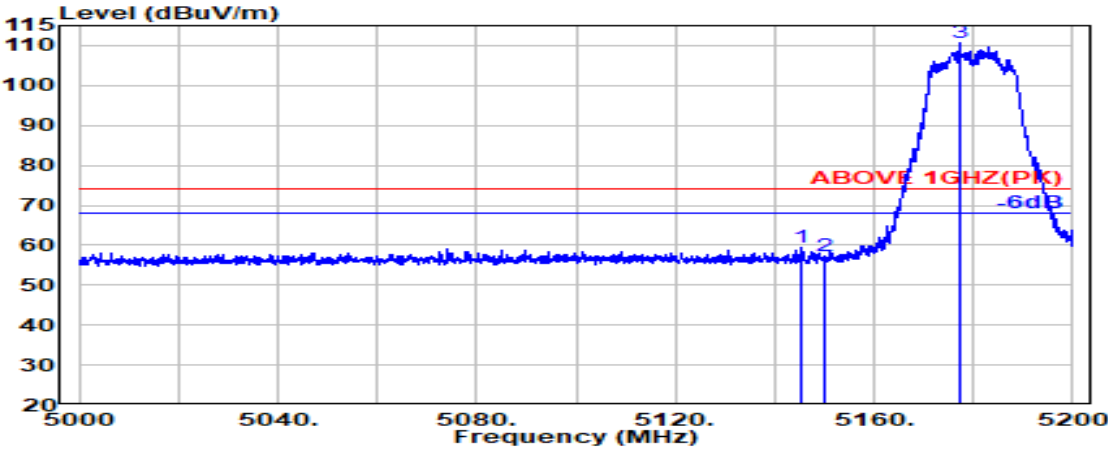

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	33.70	8.54	34.34	51.60	59.51	74.00	14.49	Peak
5150.000	33.70	8.54	34.34	49.48	57.39	74.00	16.61	Peak
@ 5177.300	33.70	8.56	34.33	102.59	110.52	---	---	Peak

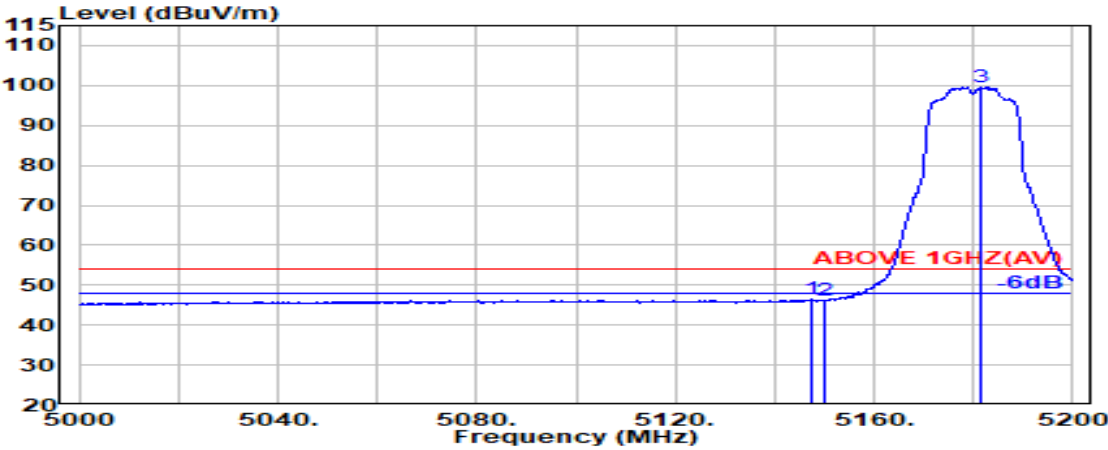


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.600	33.70	8.54	34.34	38.49	46.39	54.00	7.61	Average
5150.000	33.70	8.54	34.34	38.14	46.05	54.00	7.95	Average
@ 5181.400	33.70	8.56	34.33	91.77	99.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

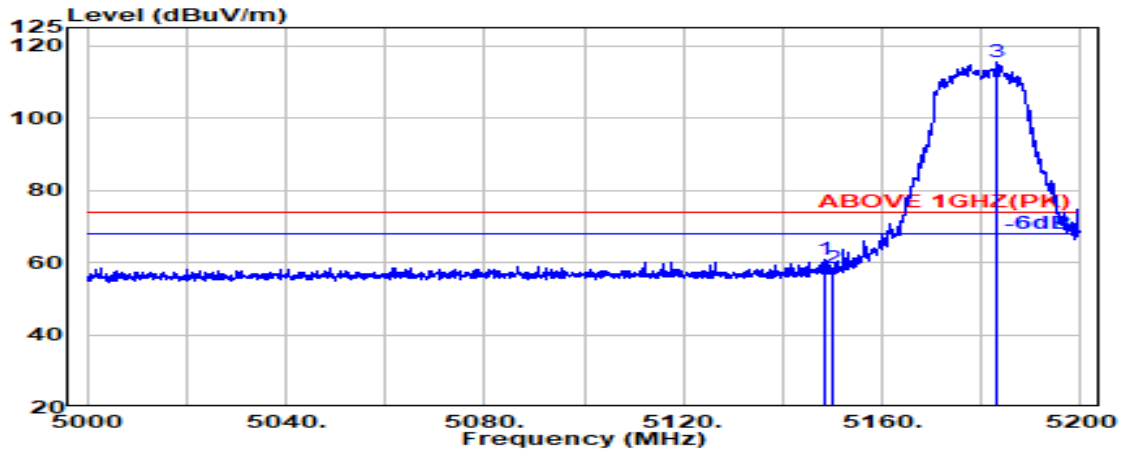

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.70	8.54	34.34	52.84	60.74	74.00	13.26	Peak
5150.000	33.70	8.54	34.34	50.44	58.34	74.00	15.66	Peak
@ 5183.300	33.70	8.56	34.32	107.41	115.35	---	---	Peak

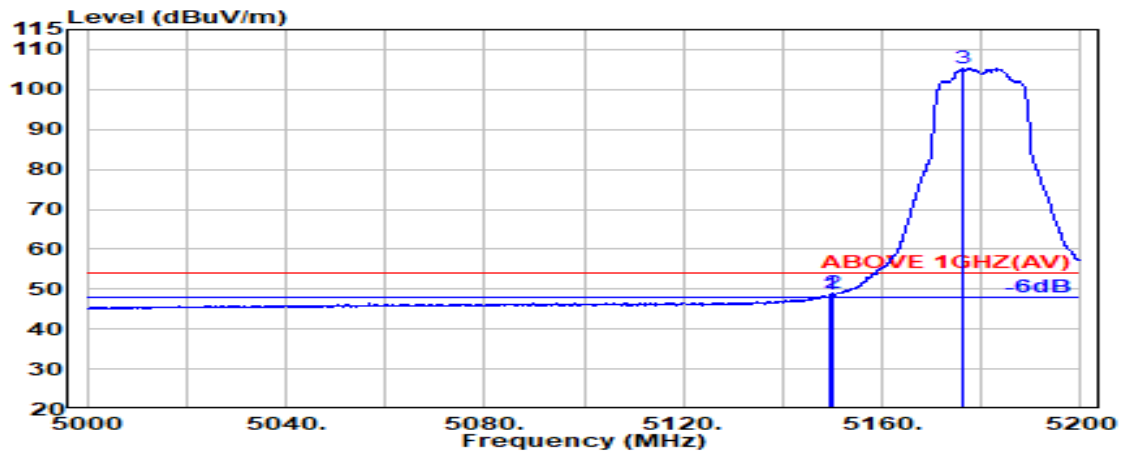


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.54	34.34	40.60	48.50	54.00	5.50	Average
5150.000	33.70	8.54	34.34	40.96	48.86	54.00	5.14	Average
@ 5176.100	33.70	8.56	34.33	97.29	105.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

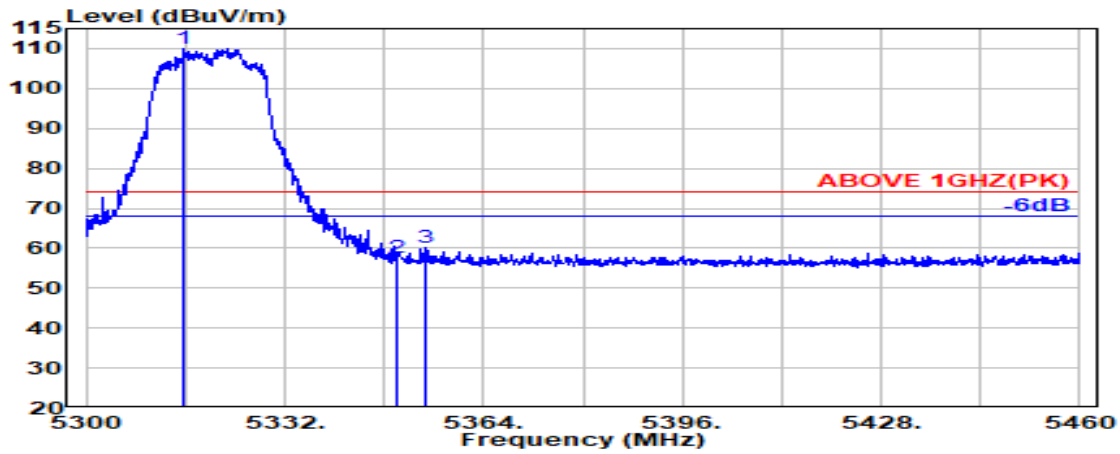

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.800	34.04	8.64	34.27	101.70	110.11	---	---	Peak
5350.000	33.90	8.67	34.26	49.42	57.73	74.00	16.27	Peak
5354.800	33.92	8.67	34.26	51.71	60.04	74.00	13.96	Peak

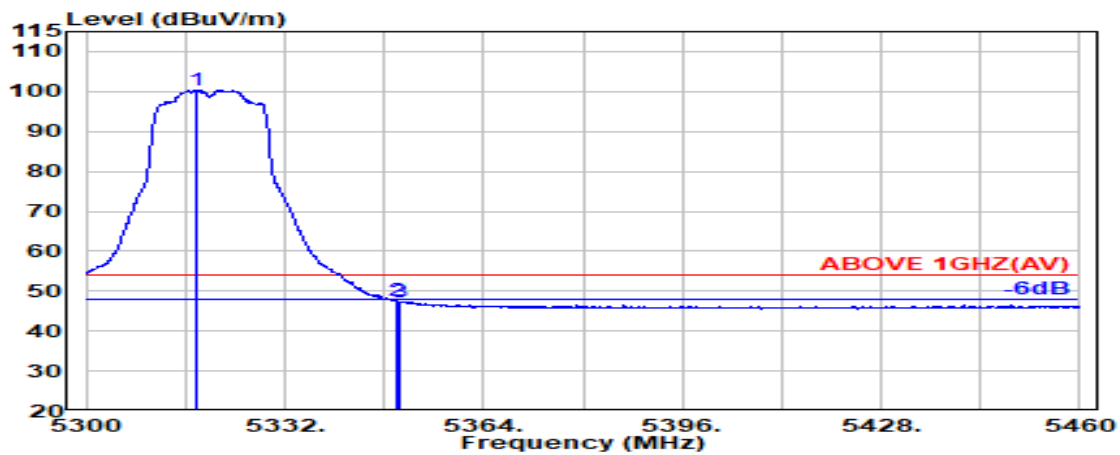


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	34.03	8.65	34.27	91.92	100.33	---	---	Average
5350.000	33.90	8.67	34.26	39.27	47.58	54.00	6.42	Average
5350.600	33.90	8.67	34.26	39.09	47.40	54.00	6.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

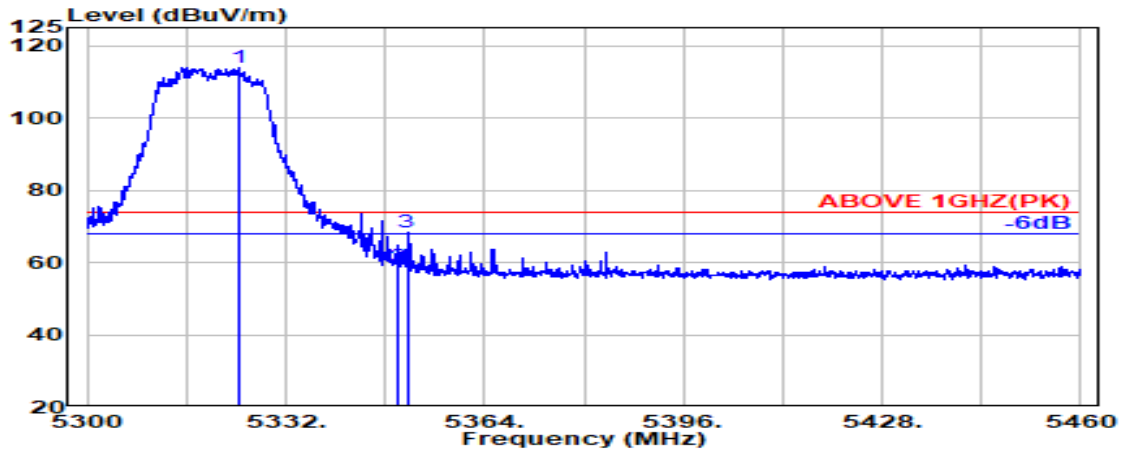

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.400	34.00	8.65	34.27	105.67	114.05	---	---	Peak
5350.000	33.90	8.67	34.26	50.61	58.92	74.00	15.08	Peak
5351.500	33.91	8.67	34.26	59.85	68.16	74.00	5.84	Peak

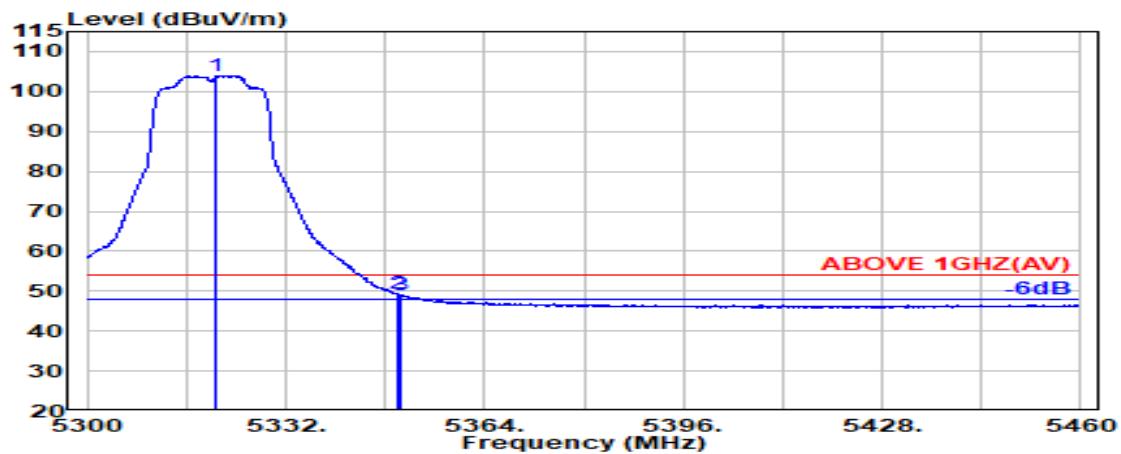


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.800	34.02	8.65	34.27	95.58	103.98	---	---	Average
5350.000	33.90	8.67	34.26	40.96	49.26	54.00	4.74	Average
5350.400	33.90	8.67	34.26	40.70	49.01	54.00	4.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

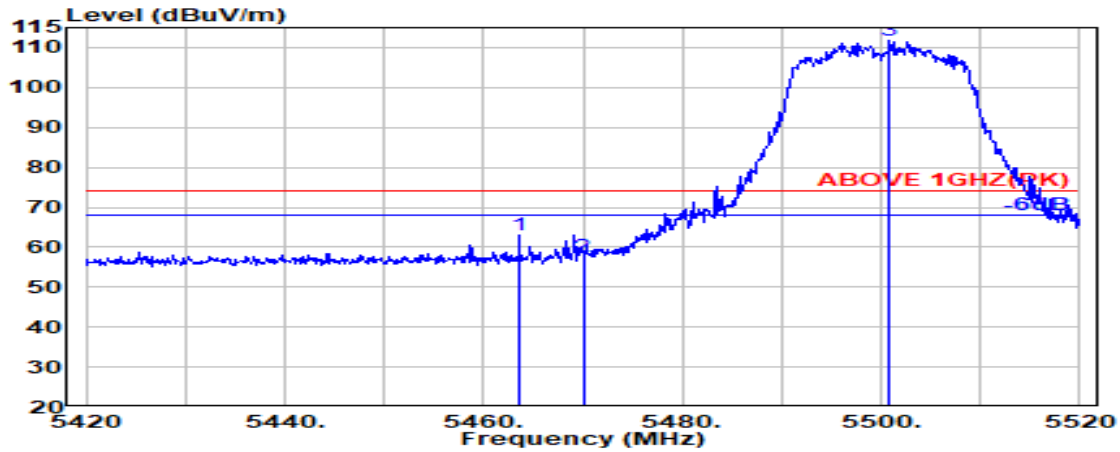

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.600	34.17	8.73	34.21	54.35	63.04	74.00	10.96	Peak
5470.000	34.16	8.74	34.21	49.13	57.82	74.00	16.18	Peak
@ 5500.800	34.10	8.75	34.20	102.95	111.60	---	---	Peak

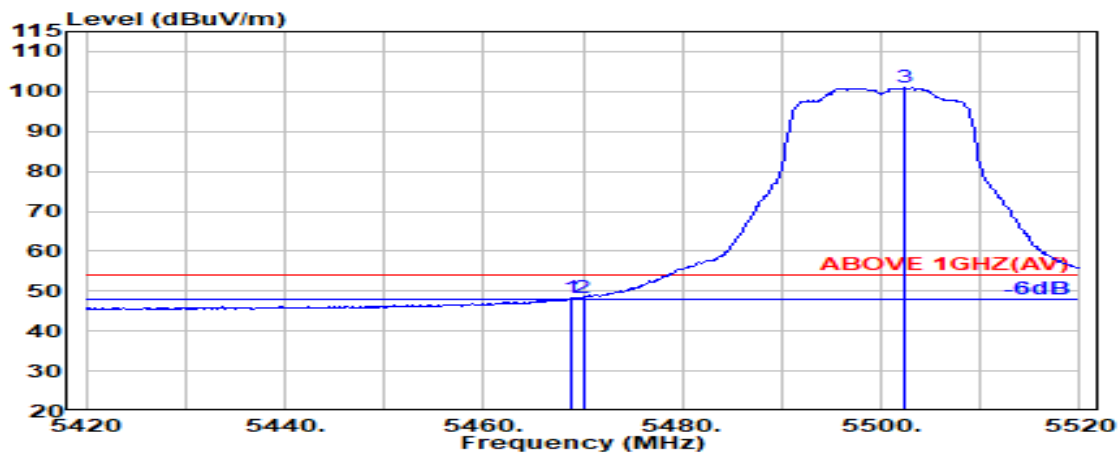


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.21	39.70	48.39	54.00	5.61	Average
5470.000	34.16	8.74	34.21	39.77	48.45	54.00	5.55	Average
@ 5502.300	34.10	8.75	34.20	92.25	100.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

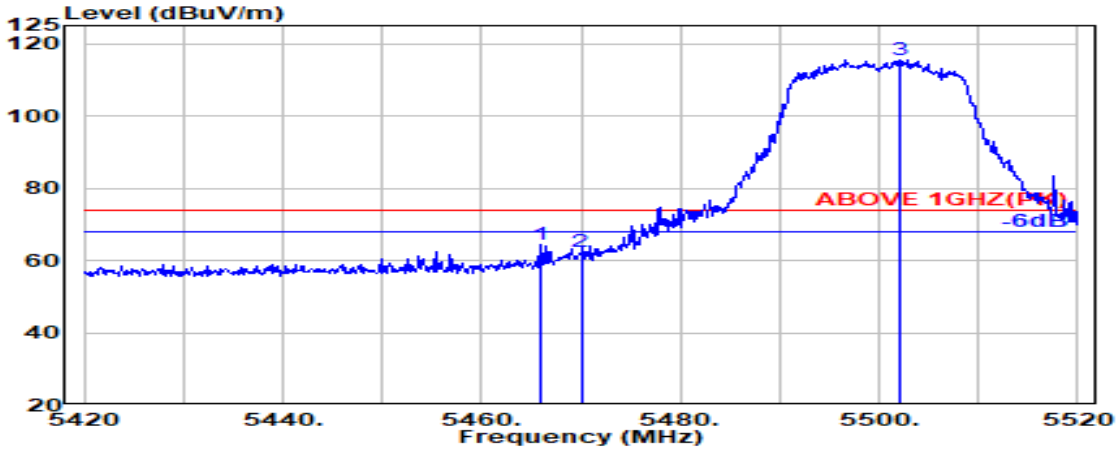

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.900	34.17	8.73	34.21	55.66	64.35	74.00	9.65	Peak
5470.000	34.16	8.74	34.21	53.56	62.24	74.00	11.76	Peak
@ 5502.200	34.10	8.75	34.20	106.84	115.50	---	---	Peak

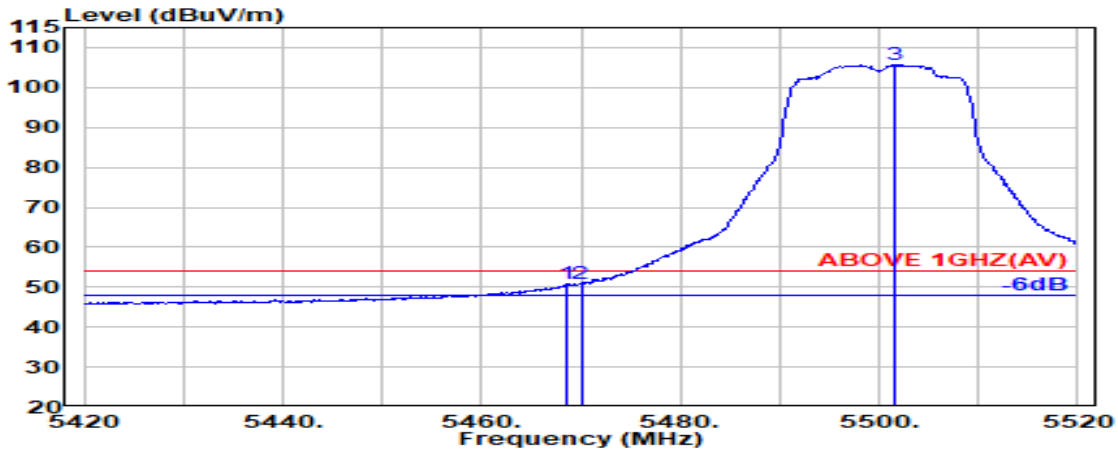


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.21	42.10	50.78	54.00	3.22	Average
5470.000	34.16	8.74	34.21	42.04	50.73	54.00	3.27	Average
@ 5501.600	34.10	8.75	34.20	96.94	105.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

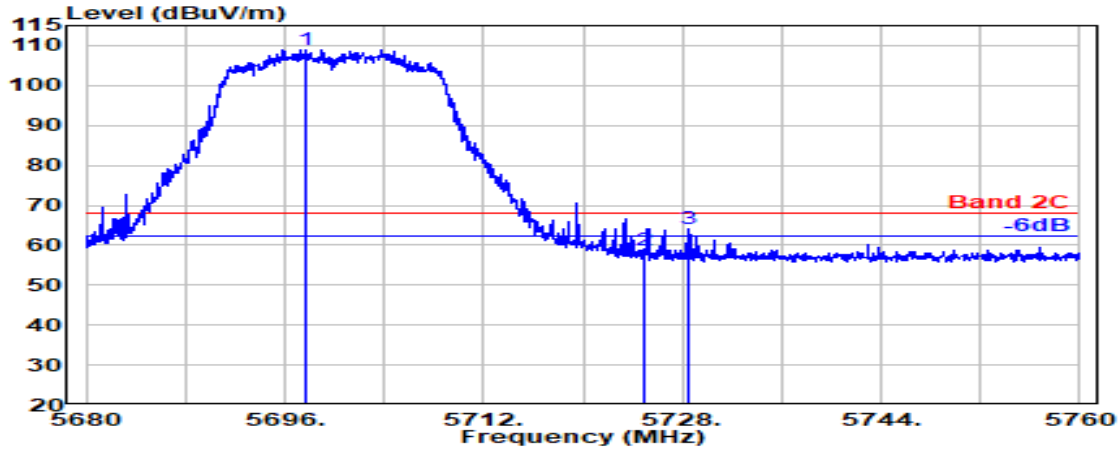

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.600	33.81	8.87	34.29	100.58	108.97	---	---	Peak
5725.000	33.80	8.88	34.31	50.21	58.58	68.20	9.62	Peak
5728.400	33.80	8.88	34.31	55.60	63.98	68.20	4.22	Peak

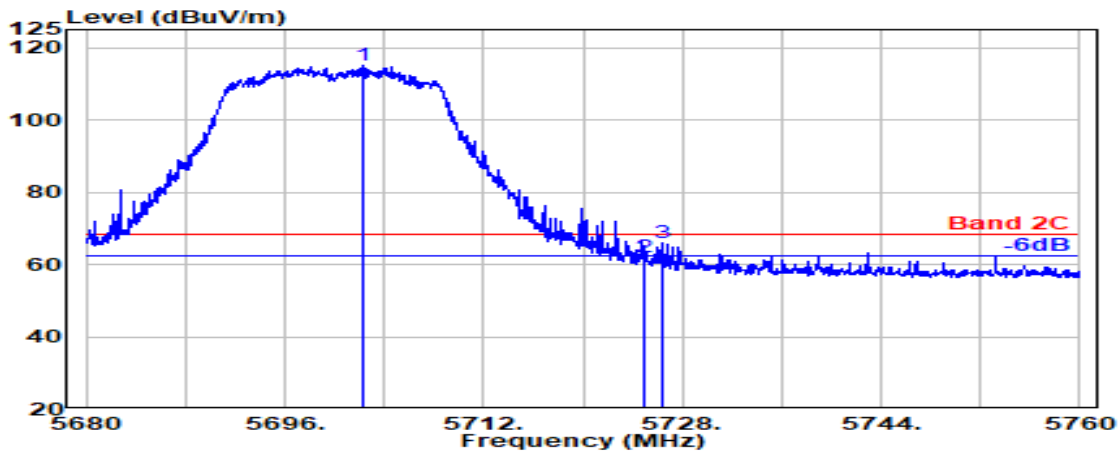


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.350	33.80	8.87	34.30	106.69	115.06	---	---	Peak
5725.000	33.80	8.88	34.31	53.68	62.05	68.20	6.15	Peak
5726.400	33.80	8.88	34.31	57.55	65.93	68.20	2.27	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

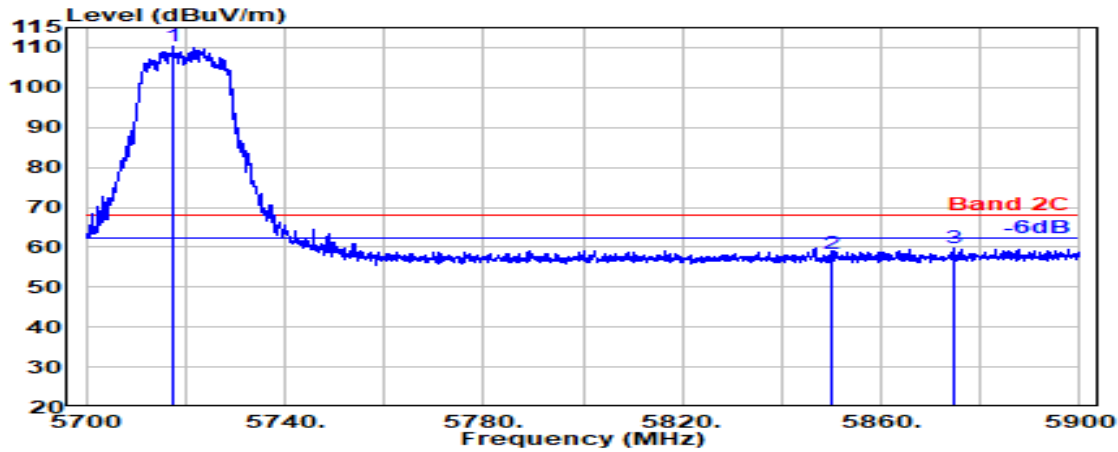

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.500	33.80	8.88	34.30	102.03	110.40	---	---	Peak
5850.000	34.10	8.95	34.36	49.61	58.30	68.20	9.90	Peak
5874.600	34.10	8.96	34.37	50.97	59.66	68.20	8.54	Peak

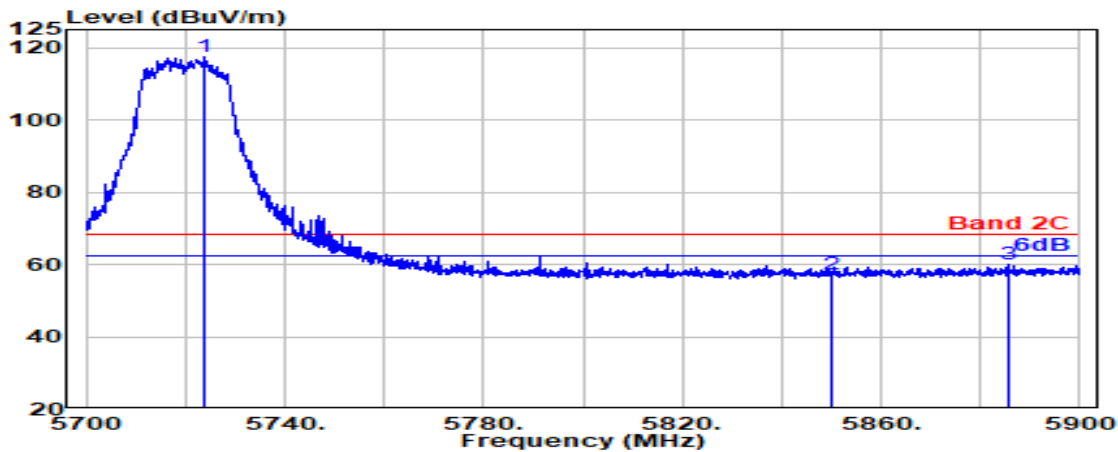


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.700	33.80	8.88	34.31	108.95	117.32	---	---	Peak
5850.000	34.10	8.95	34.36	48.39	57.08	68.20	11.12	Peak
5885.500	34.10	8.97	34.38	51.40	60.09	68.20	8.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

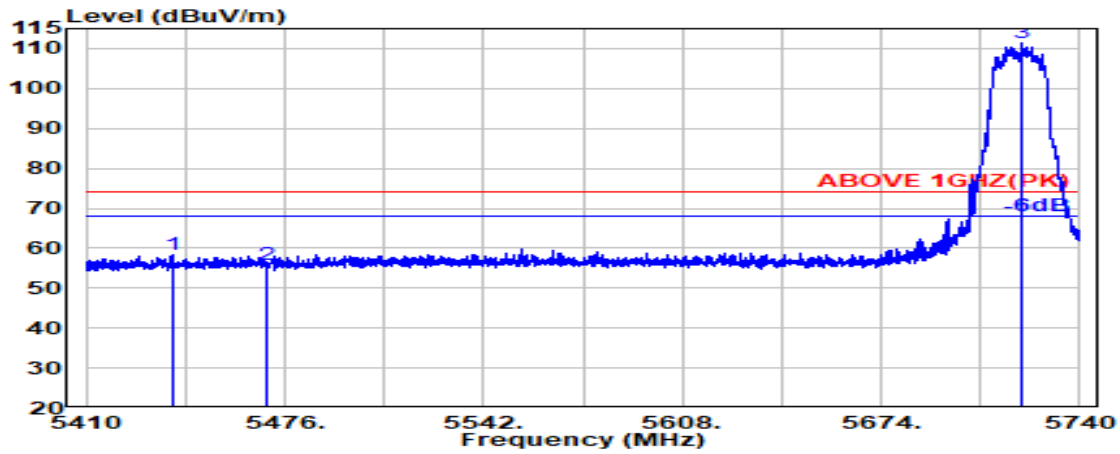

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.500	34.18	8.72	34.22	49.84	58.51	74.00	15.49	Peak
5470.000	34.16	8.74	34.21	47.06	55.74	74.00	18.26	Peak
@ 5720.700	33.80	8.88	34.30	103.20	111.57	---	---	Peak

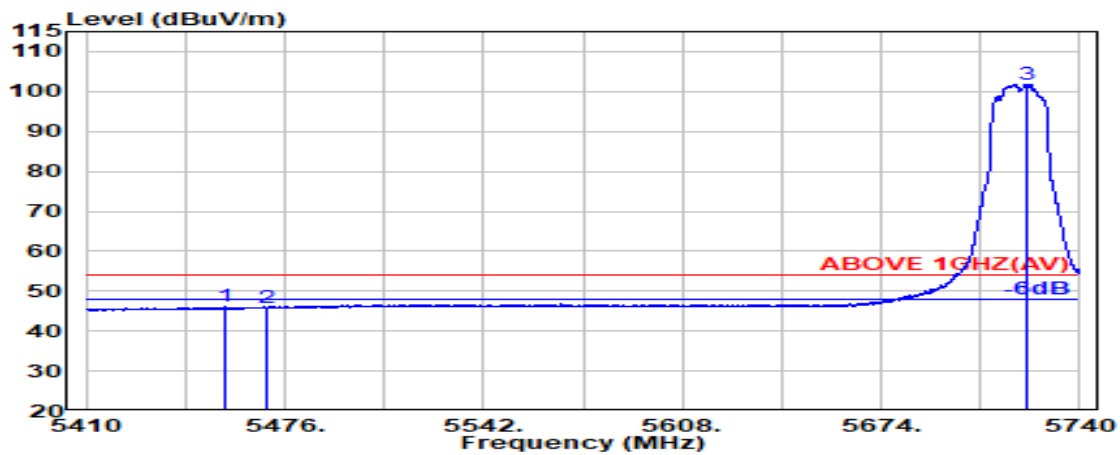


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.100	34.19	8.73	34.22	37.32	46.01	54.00	7.99	Average
5470.000	34.16	8.74	34.21	37.09	45.78	54.00	8.22	Average
@ 5722.800	33.80	8.88	34.30	93.40	101.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

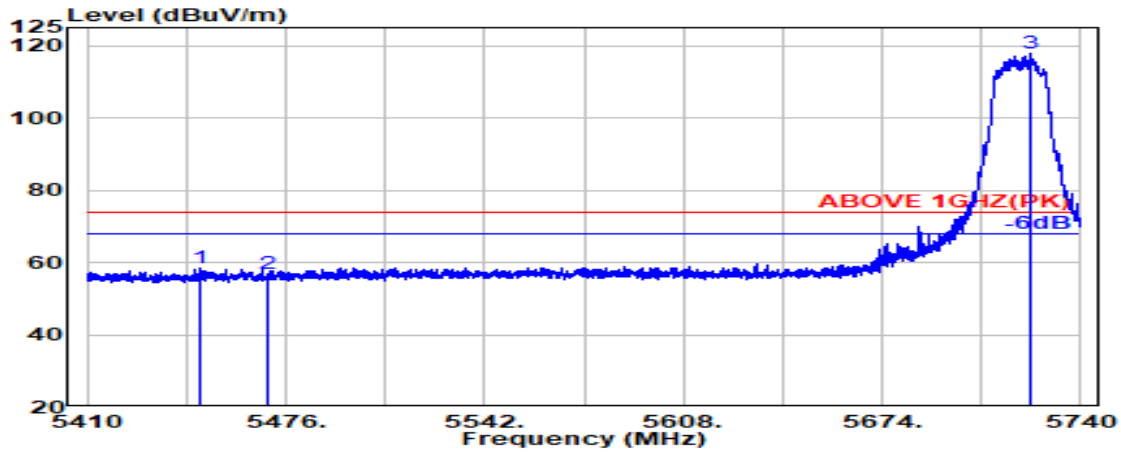

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.300	34.19	8.72	34.22	49.58	58.28	74.00	15.72	Peak
5470.000	34.16	8.74	34.21	48.16	56.85	74.00	17.15	Peak
@ 5723.600	33.80	8.88	34.31	109.58	117.96	---	---	Peak

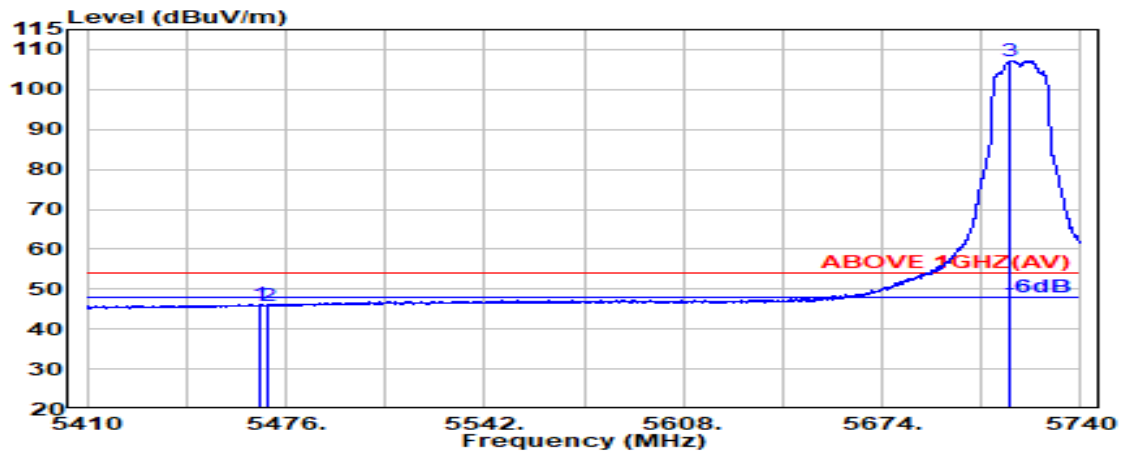


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.21	37.53	46.22	54.00	7.78	Average
5470.000	34.16	8.74	34.21	37.21	45.89	54.00	8.11	Average
@ 5716.700	33.80	8.88	34.30	98.80	107.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

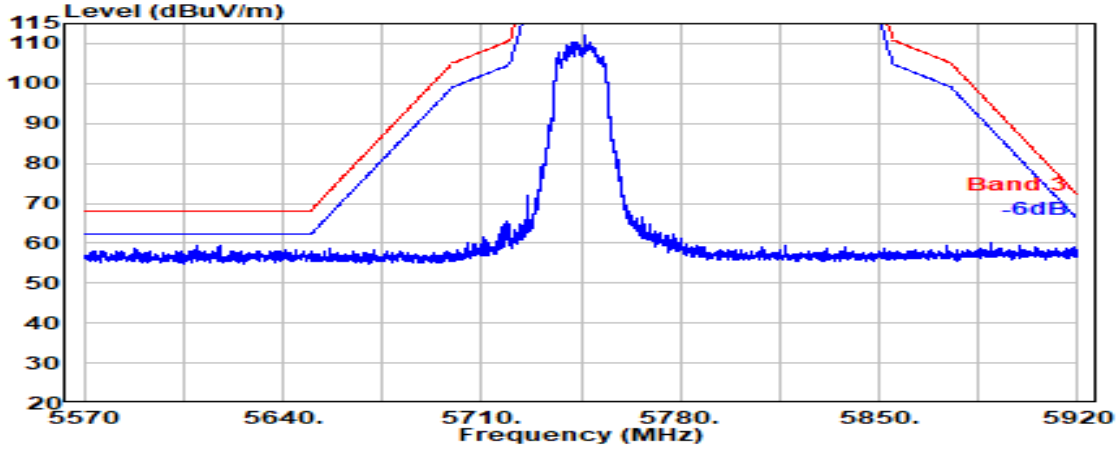


Antenna at Vertical Polarization

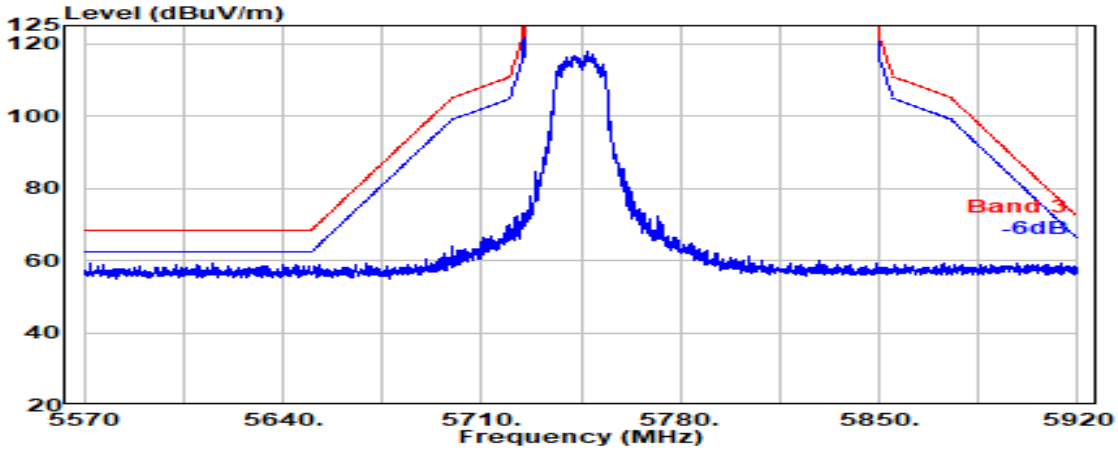




Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

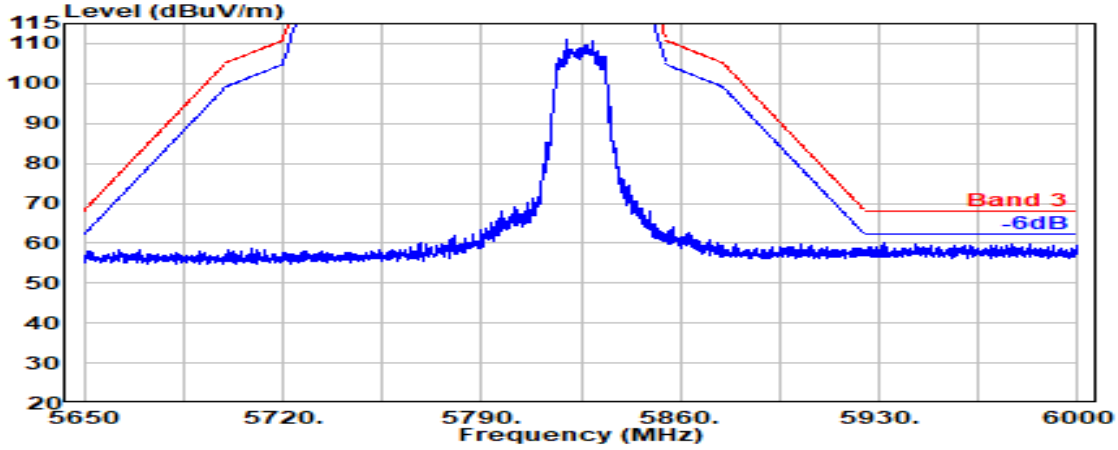

Antenna at Vertical Polarization

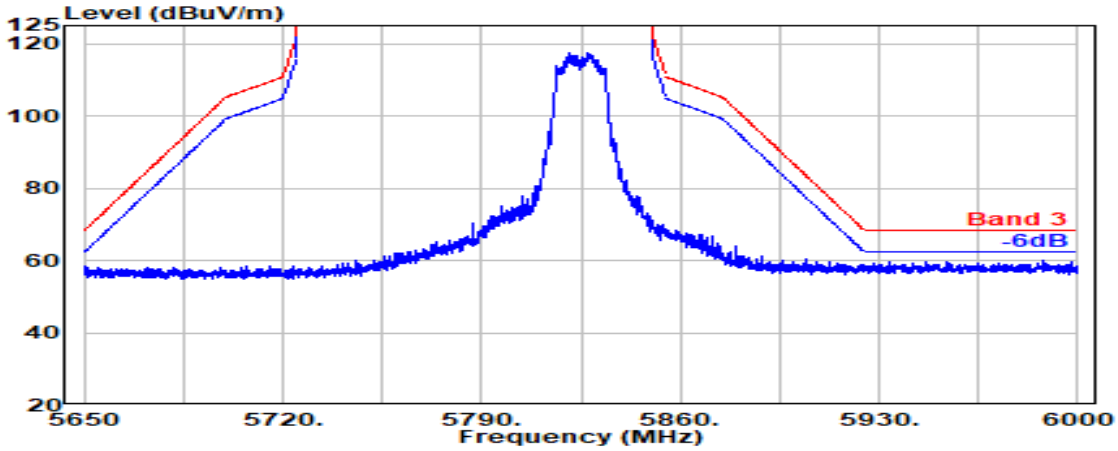


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

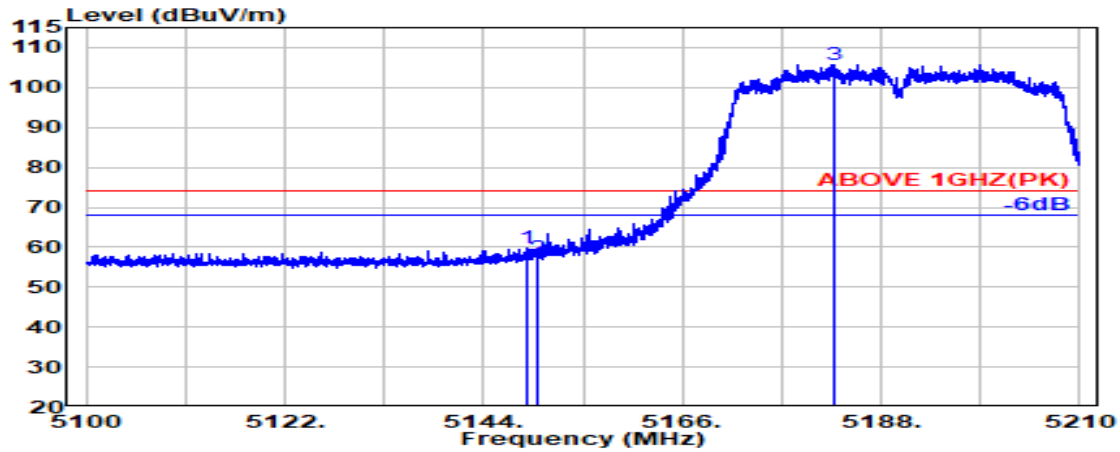

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.809	33.70	8.54	34.34	51.80	59.71	74.00	14.29	Peak
5150.000	33.70	8.54	34.34	49.49	57.40	74.00	16.60	Peak
@ 5182.688	33.70	8.56	34.32	97.90	105.84	---	---	Peak

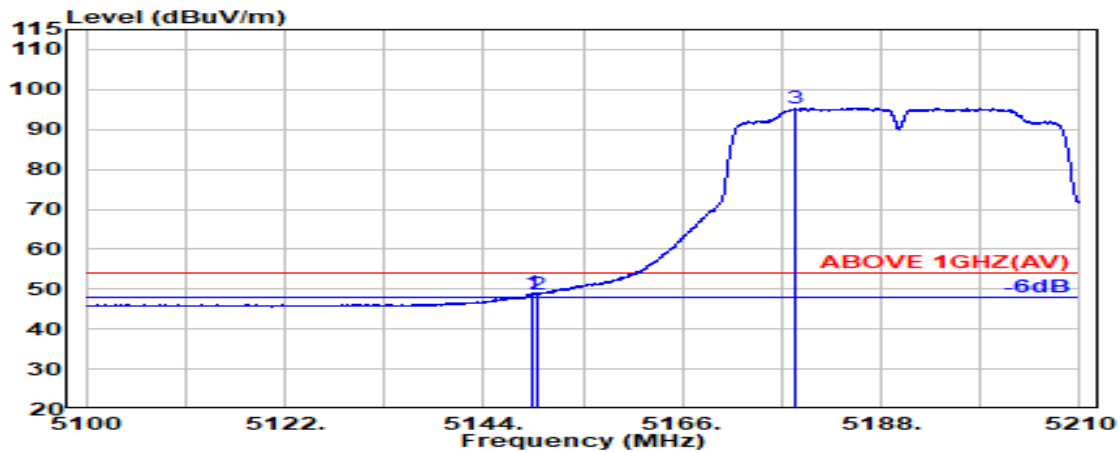


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.54	34.34	41.04	48.94	54.00	5.06	Average
5150.000	33.70	8.54	34.34	40.78	48.69	54.00	5.31	Average
@ 5178.477	33.70	8.56	34.33	87.37	95.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

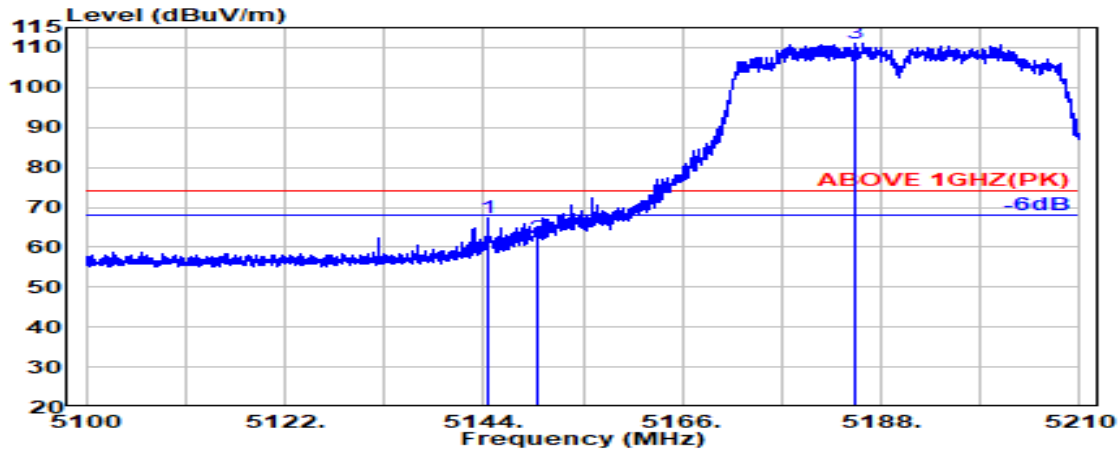

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5144.534	33.70	8.54	34.34	59.47	67.37	74.00	6.63	Peak
5150.000	33.70	8.54	34.34	54.24	62.15	74.00	11.85	Peak
@ 5185.077	33.70	8.57	34.32	103.28	111.23	---	---	Peak

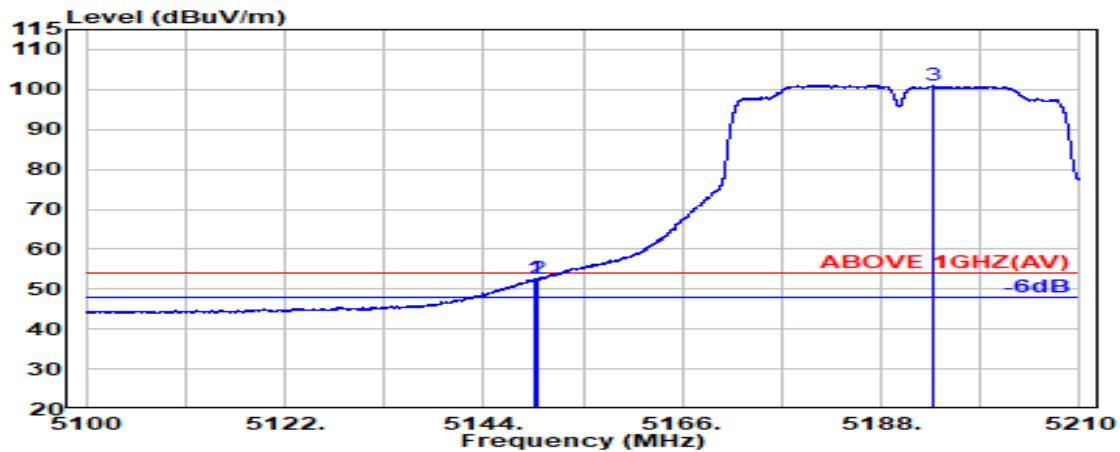


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.688	33.70	8.54	34.34	44.56	52.47	54.00	1.53	Average
5150.000	33.70	8.54	34.34	44.54	52.45	54.00	1.55	Average
@ 5193.846	33.70	8.57	34.32	93.24	101.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

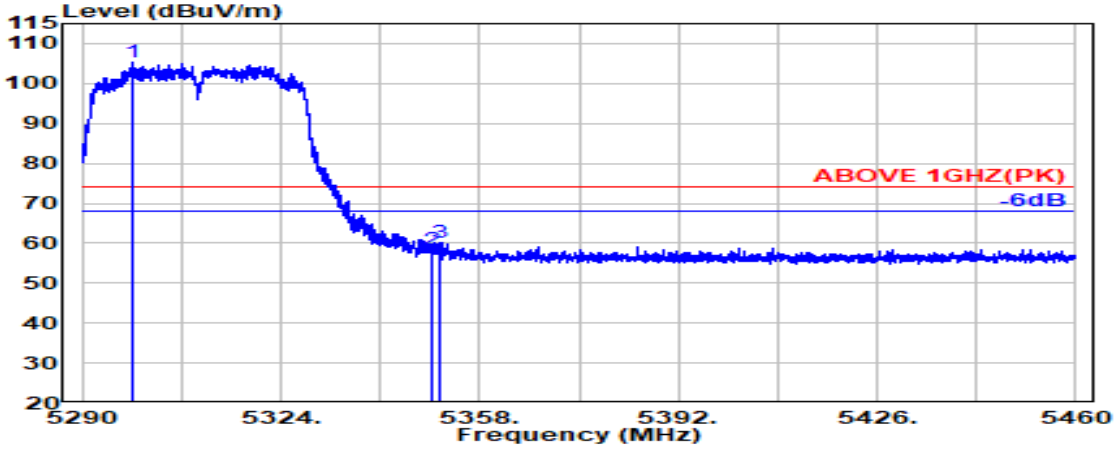

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.548	34.09	8.63	34.28	96.83	105.27	---	---	Peak
5350.000	33.90	8.67	34.26	50.19	58.49	74.00	15.51	Peak
5351.394	33.91	8.67	34.26	51.98	60.30	74.00	13.70	Peak

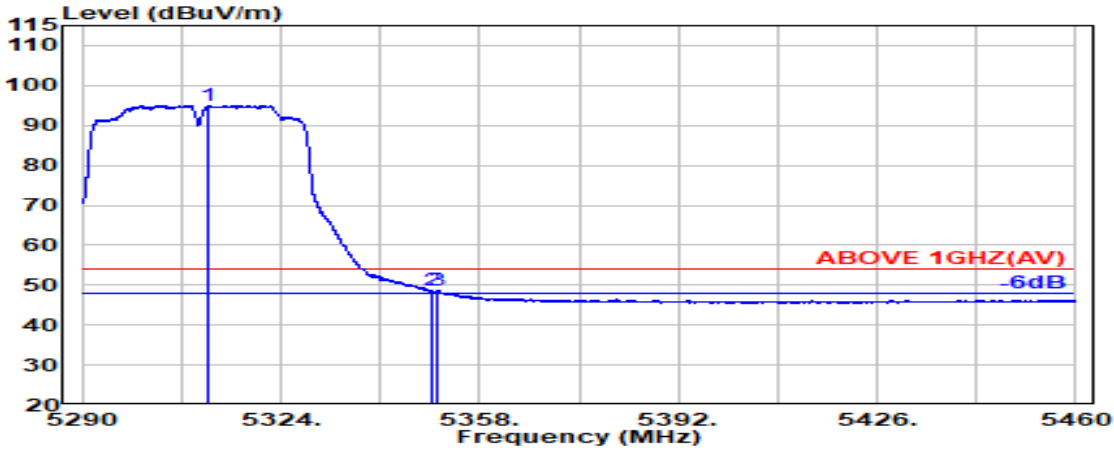


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.760	34.05	8.64	34.27	86.65	95.08	---	---	Average
5350.000	33.90	8.67	34.26	40.40	48.71	54.00	5.29	Average
5350.714	33.90	8.67	34.26	40.34	48.65	54.00	5.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

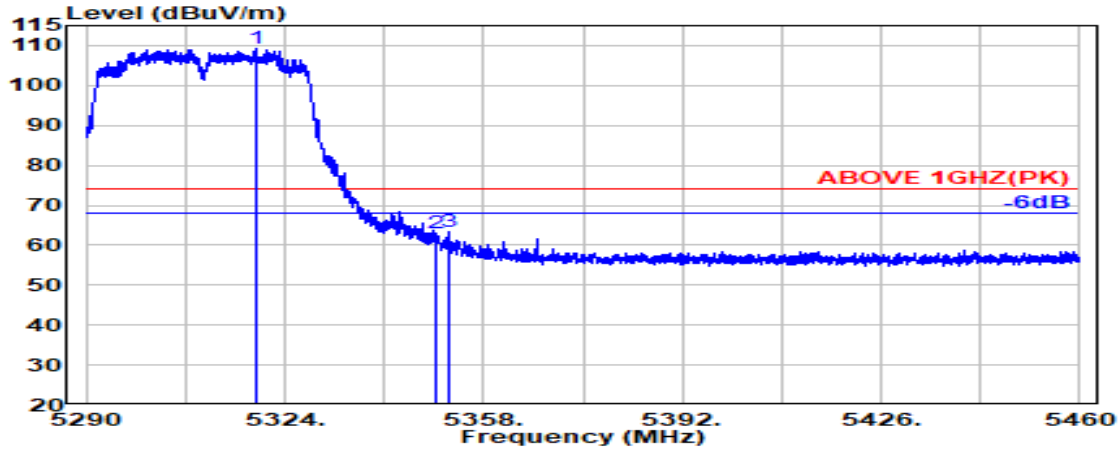

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.094	34.02	8.65	34.27	100.87	109.27	---	---	Peak
5350.000	33.90	8.67	34.26	54.75	63.05	74.00	10.95	Peak
5352.220	33.91	8.67	34.26	55.10	63.41	74.00	10.59	Peak

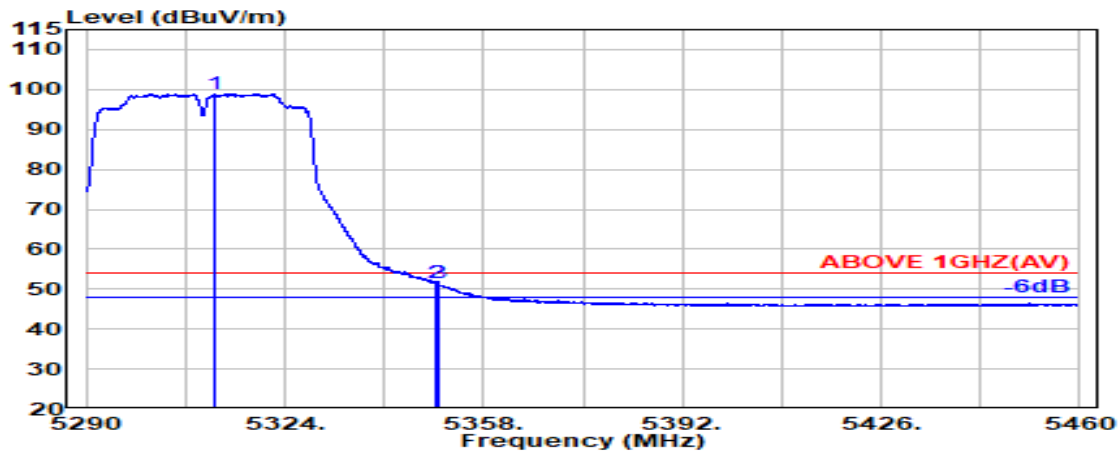


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.954	34.05	8.64	34.27	90.53	98.96	---	---	Average
5350.000	33.90	8.67	34.26	43.16	51.47	54.00	2.53	Average
5350.326	33.90	8.67	34.26	43.18	51.49	54.00	2.51	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

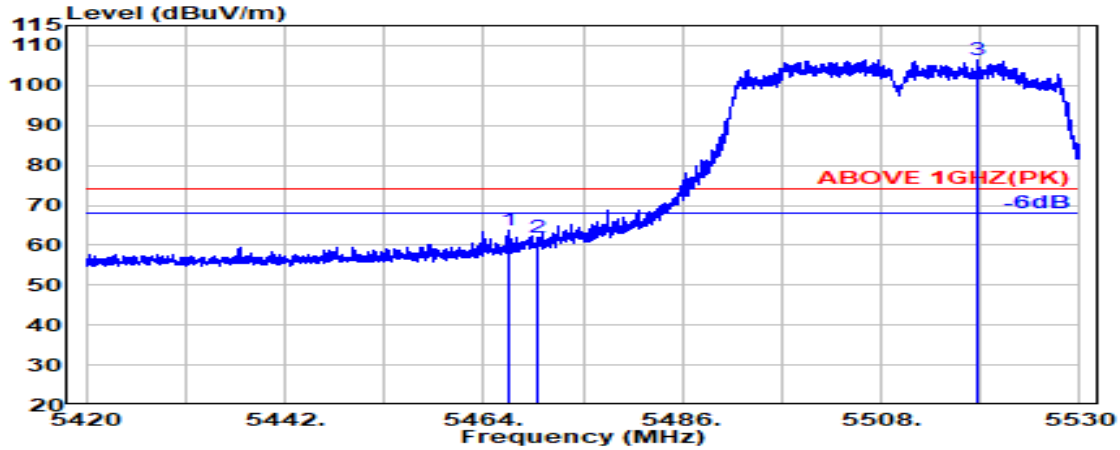

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.829	34.17	8.73	34.21	55.16	63.85	74.00	10.15	Peak
5470.000	34.16	8.74	34.21	53.18	61.87	74.00	12.13	Peak
@ 5518.749	34.10	8.76	34.21	97.90	106.55	---	---	Peak

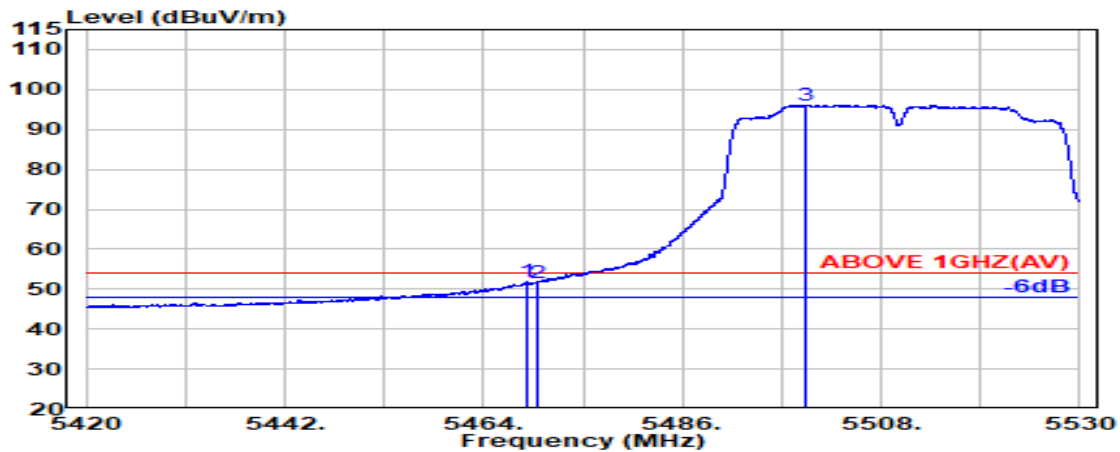


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.746	34.16	8.74	34.21	43.06	51.75	54.00	2.25	Average
5470.000	34.16	8.74	34.21	43.03	51.72	54.00	2.28	Average
@ 5499.734	34.10	8.75	34.20	87.52	96.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

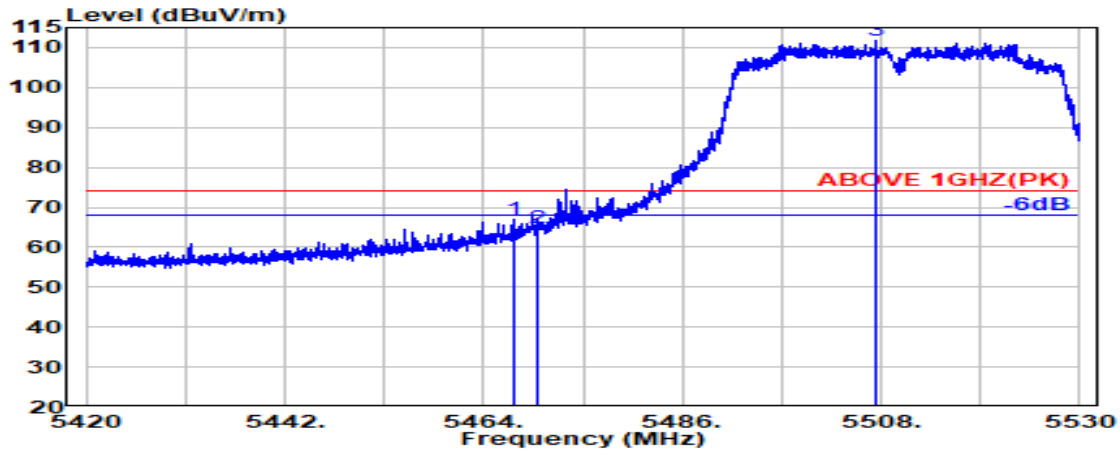

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.394	34.17	8.73	34.21	58.19	66.87	74.00	7.13	Peak
5470.000	34.16	8.74	34.21	56.15	64.84	74.00	9.16	Peak
@ 5507.403	34.10	8.76	34.20	103.23	111.88	---	---	Peak

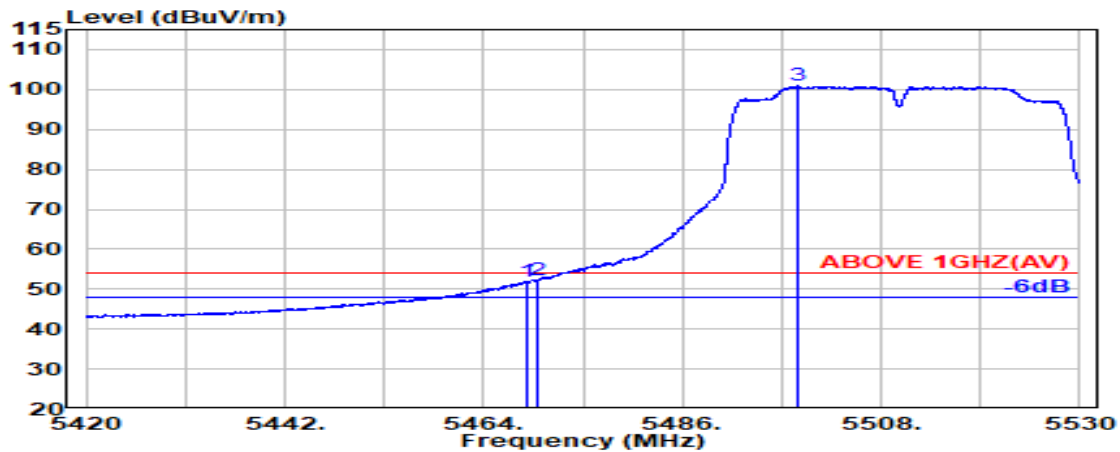


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.809	34.16	8.74	34.21	43.15	51.84	54.00	2.16	Average
5470.000	34.16	8.74	34.21	43.53	52.21	54.00	1.79	Average
@ 5498.729	34.10	8.75	34.20	92.23	100.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

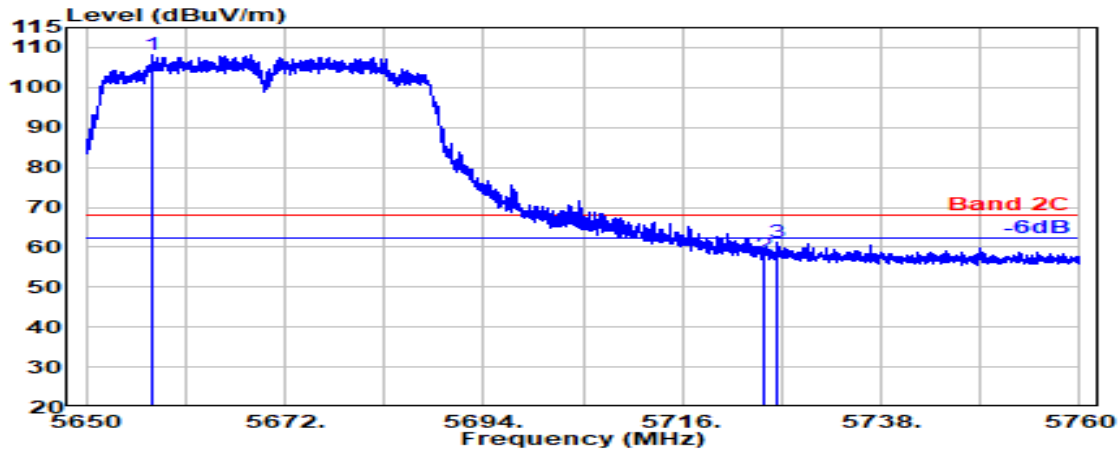

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5657.354	33.97	8.84	34.27	99.60	108.14	---	---	Peak
5725.000	33.80	8.88	34.31	49.77	58.15	68.20	10.05	Peak
5726.434	33.80	8.88	34.31	52.79	61.16	68.20	7.04	Peak

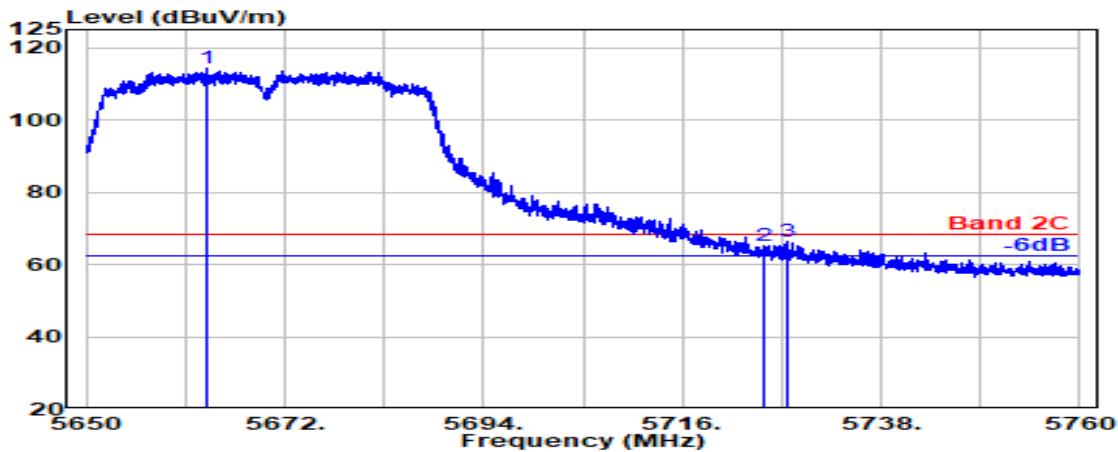


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5663.452	33.95	8.85	34.28	105.60	114.12	---	---	Peak
5725.000	33.80	8.88	34.31	56.84	65.21	68.20	2.99	Peak
5727.723	33.80	8.88	34.31	57.85	66.22	68.20	1.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

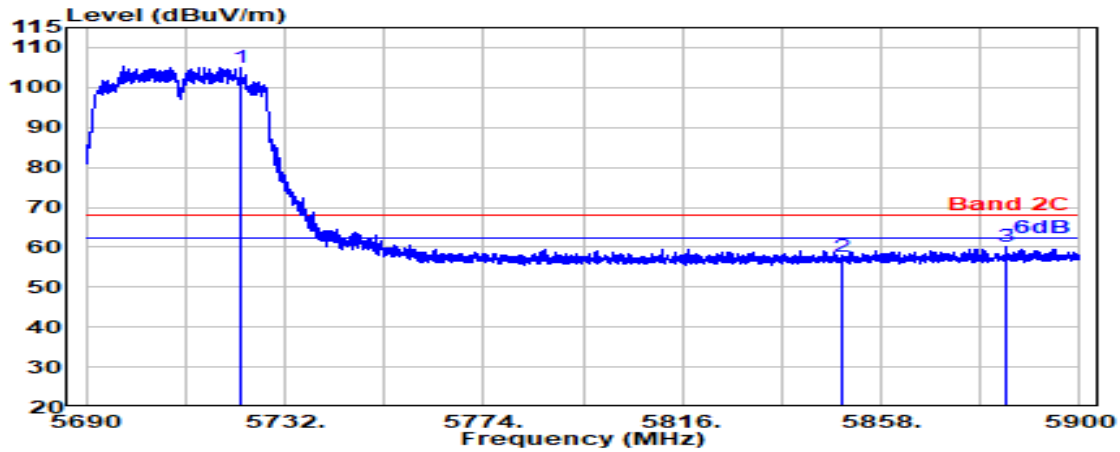

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.520	33.80	8.88	34.30	96.75	105.12	---	---	Peak
5850.000	34.10	8.95	34.36	48.93	57.62	68.20	10.58	Peak
5884.400	34.10	8.97	34.38	51.34	60.03	68.20	8.17	Peak

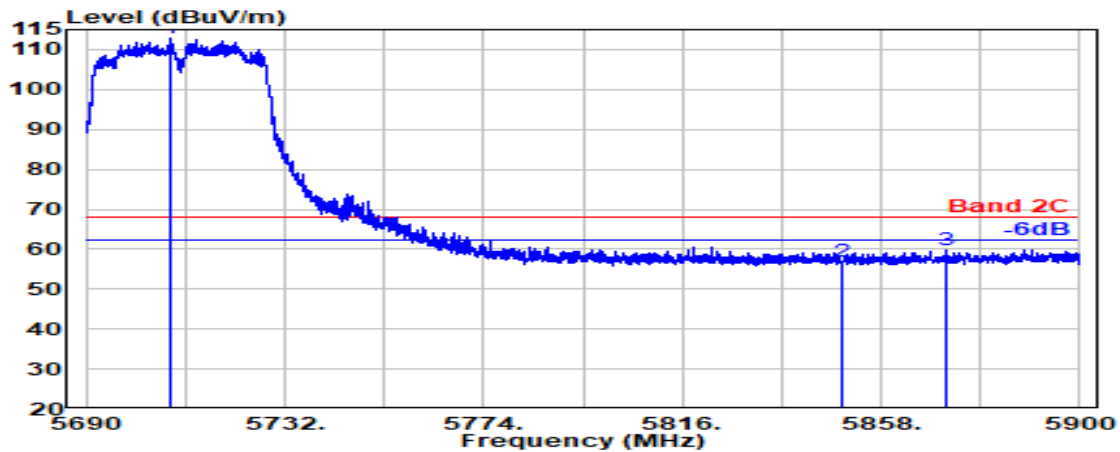


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.760	33.80	8.87	34.30	104.33	112.70	---	---	Peak
5850.000	34.10	8.95	34.36	48.41	57.09	68.20	11.11	Peak
5871.560	34.10	8.96	34.37	51.04	59.73	68.20	8.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

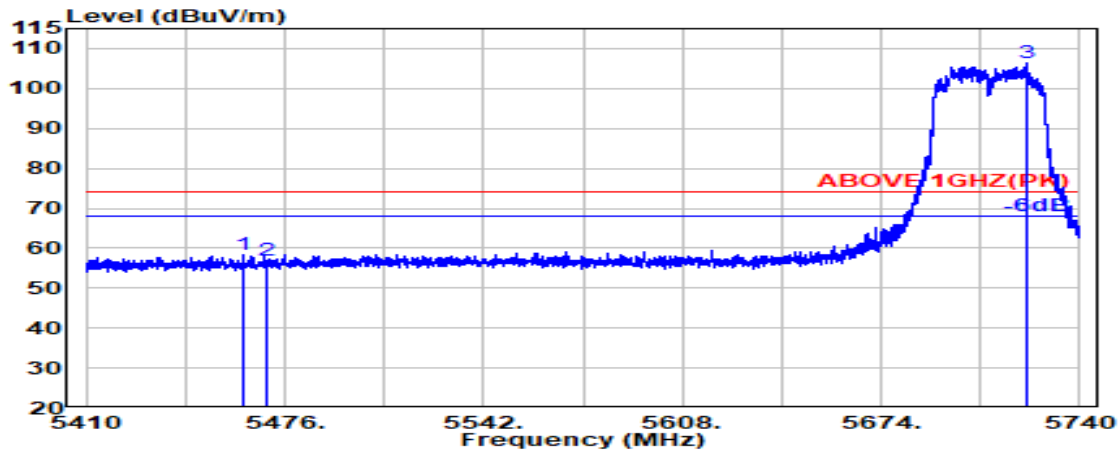

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.517	34.17	8.73	34.21	49.65	58.34	74.00	15.66	Peak
5470.000	34.16	8.74	34.21	48.24	56.92	74.00	17.08	Peak
@ 5722.180	33.80	8.88	34.30	97.97	106.34	---	---	Peak

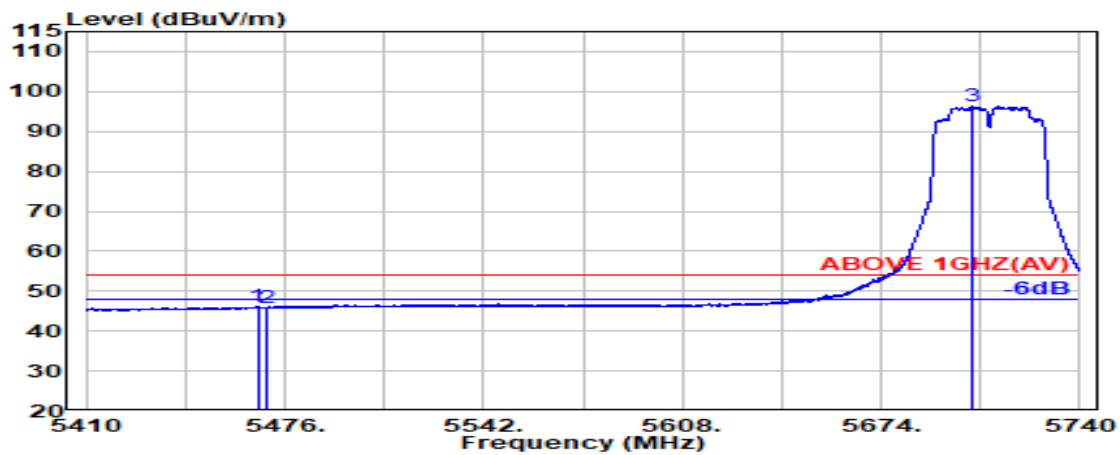


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.949	34.17	8.73	34.21	37.35	46.04	54.00	7.96	Average
5470.000	34.16	8.74	34.21	37.12	45.81	54.00	8.19	Average
@ 5704.643	33.80	8.87	34.30	87.85	96.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

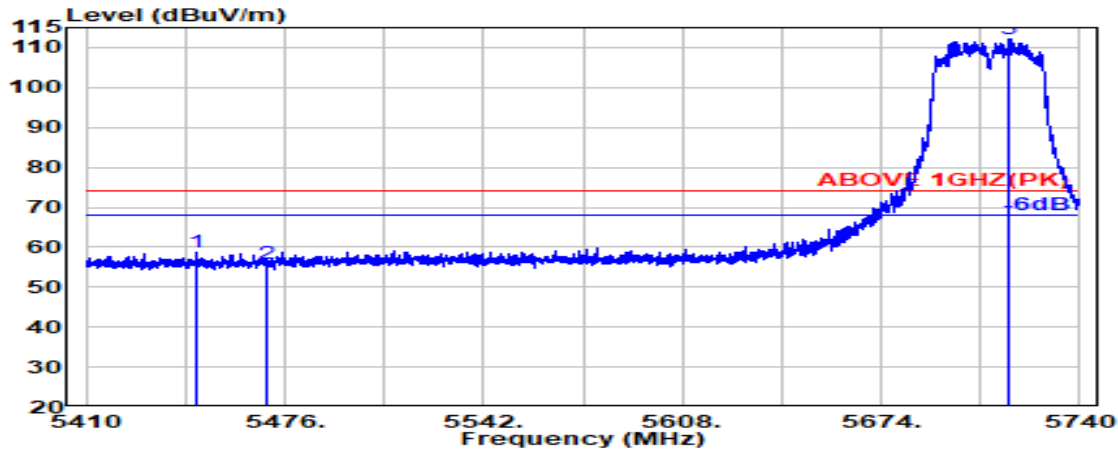

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.771	34.19	8.72	34.22	50.00	58.69	74.00	15.31	Peak
5470.000	34.16	8.74	34.21	47.09	55.77	74.00	18.23	Peak
@ 5716.334	33.80	8.88	34.30	103.76	112.13	---	---	Peak

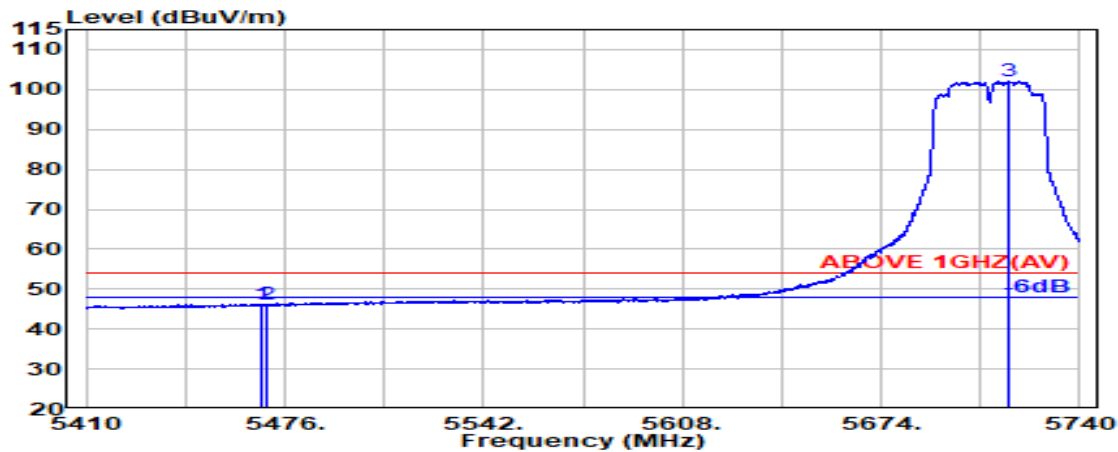


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.986	34.16	8.73	34.21	37.47	46.16	54.00	7.84	Average
5470.000	34.16	8.74	34.21	37.44	46.12	54.00	7.88	Average
@ 5716.334	33.80	8.88	34.30	93.75	102.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

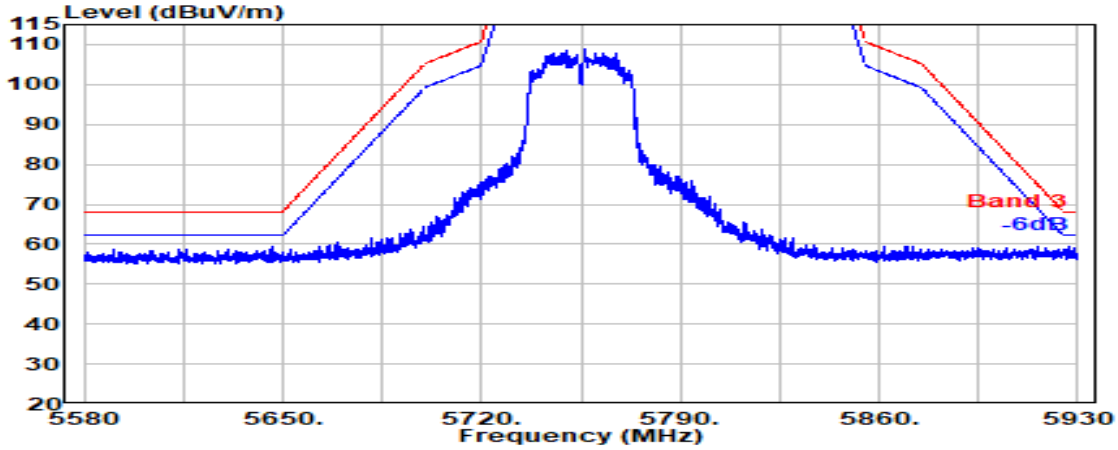


Antenna at Vertical Polarization

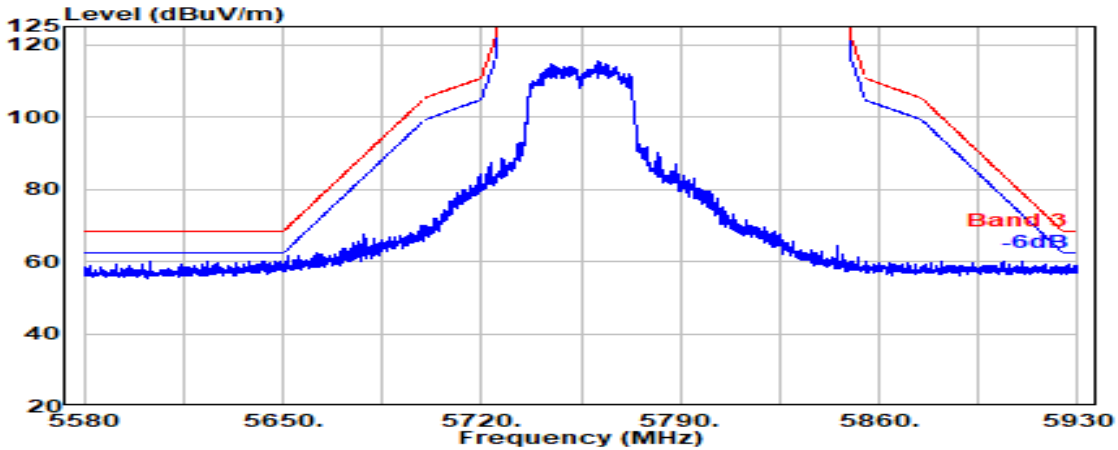


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


## Antenna at Horizontal Polarization

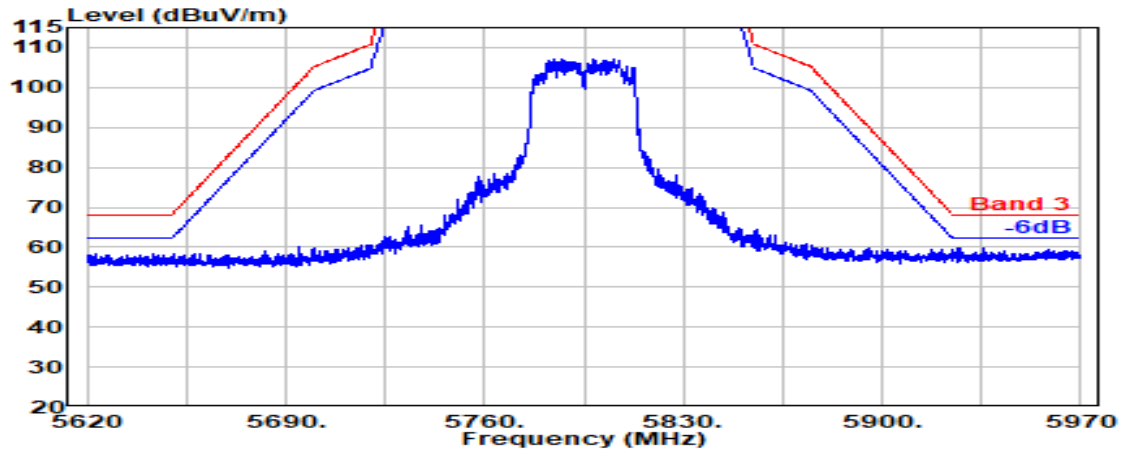

## Antenna at Vertical Polarization

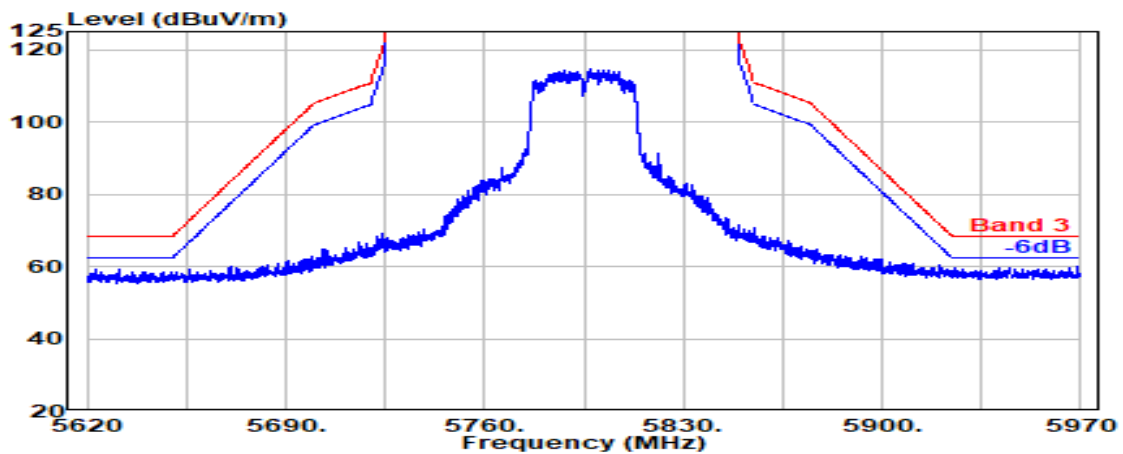


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

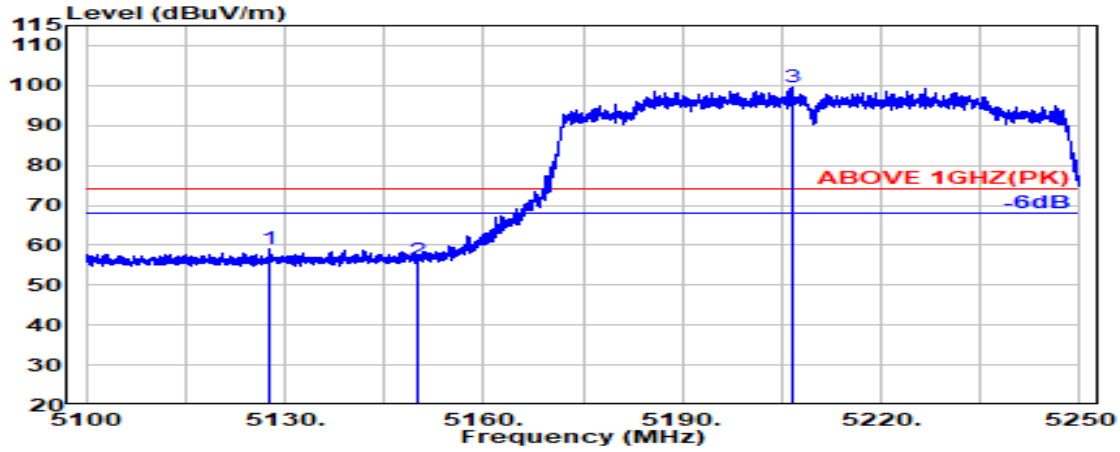

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.729	33.70	8.53	34.35	51.34	59.22	74.00	14.78	Peak
5150.000	33.70	8.54	34.34	48.29	56.20	74.00	17.80	Peak
@ 5206.457	33.71	8.58	34.32	91.72	99.69	---	---	Peak

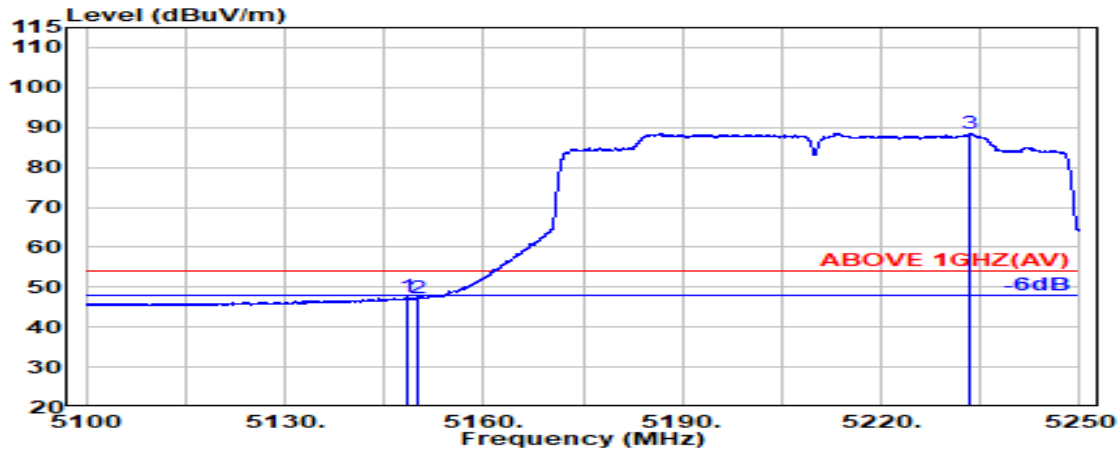


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.643	33.70	8.54	34.34	39.52	47.43	54.00	6.57	Average
5150.000	33.70	8.54	34.34	39.43	47.33	54.00	6.67	Average
@ 5233.500	33.77	8.60	34.30	80.44	88.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

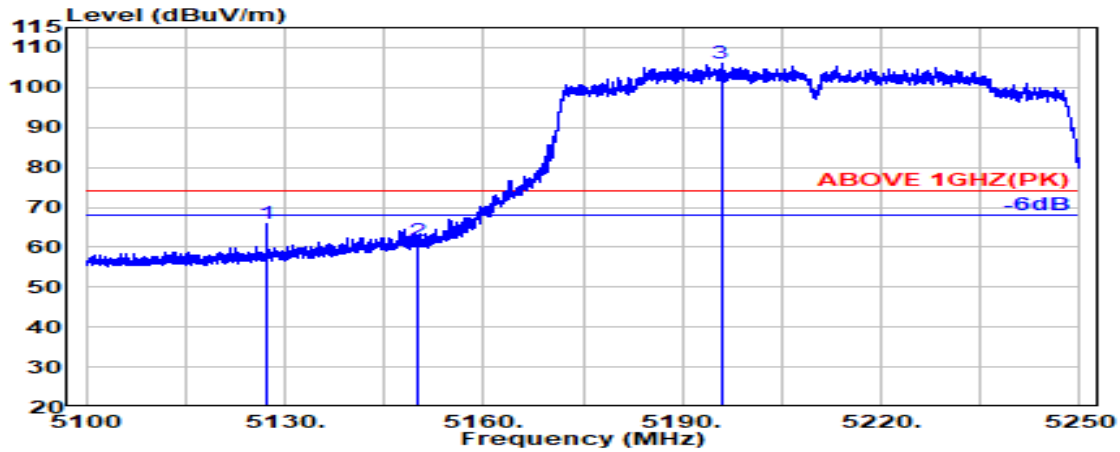

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.343	33.70	8.53	34.35	57.90	65.79	74.00	8.21	Peak
5150.000	33.70	8.54	34.34	53.77	61.68	74.00	12.32	Peak
@ 5195.829	33.70	8.57	34.32	97.95	105.90	---	---	Peak

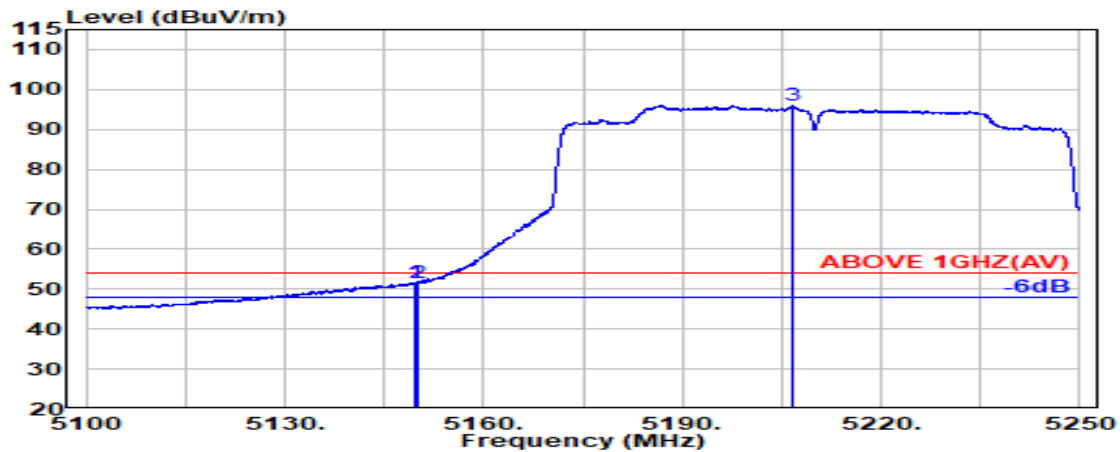


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.54	34.34	43.57	51.47	54.00	2.53	Average
5150.000	33.70	8.54	34.34	43.69	51.60	54.00	2.40	Average
@ 5206.671	33.71	8.58	34.32	88.05	96.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

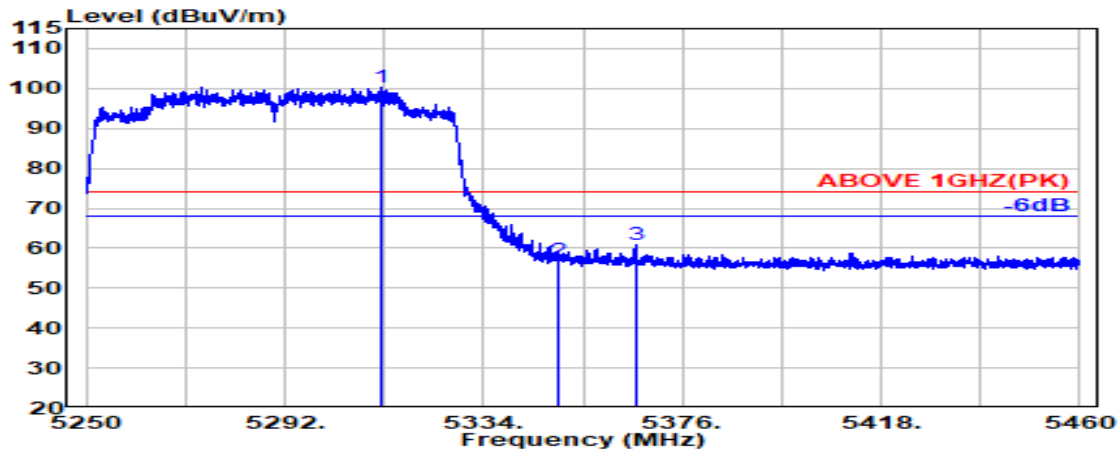

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.340	34.05	8.64	34.27	91.98	100.40	---	---	Peak
5350.000	33.90	8.67	34.26	48.67	56.98	74.00	17.02	Peak
5366.040	33.96	8.67	34.25	52.45	60.84	74.00	13.16	Peak

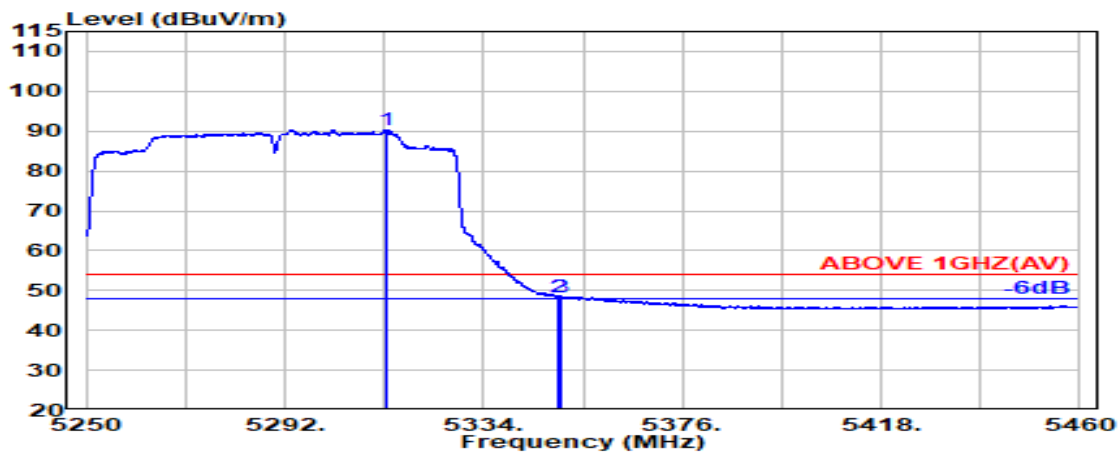


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.300	34.05	8.64	34.27	81.98	90.40	---	---	Average
5350.000	33.90	8.67	34.26	40.08	48.39	54.00	5.61	Average
5350.560	33.90	8.67	34.26	40.13	48.44	54.00	5.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

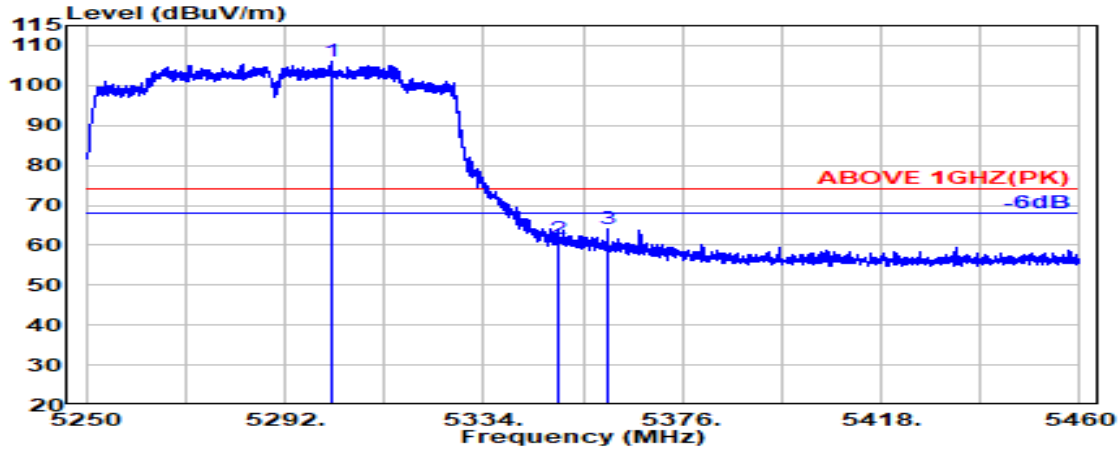

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.780	34.09	8.64	34.28	97.61	106.06	---	---	Peak
5350.000	33.90	8.67	34.26	53.19	61.50	74.00	12.50	Peak
5360.040	33.94	8.67	34.25	55.61	63.97	74.00	10.03	Peak

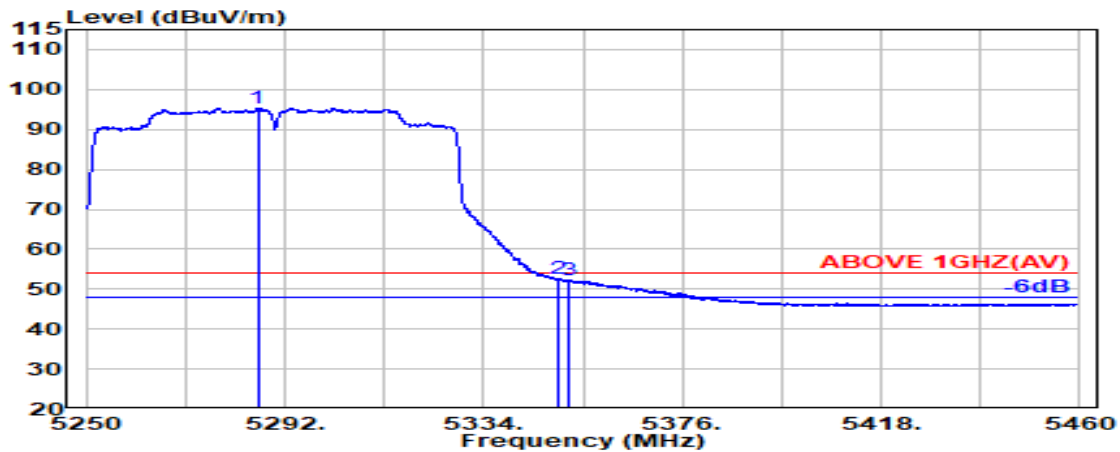


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.240	34.02	8.63	34.28	87.03	95.39	---	---	Average
5350.000	33.90	8.67	34.26	44.15	52.46	54.00	1.54	Average
5351.880	33.91	8.67	34.26	43.98	52.29	54.00	1.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

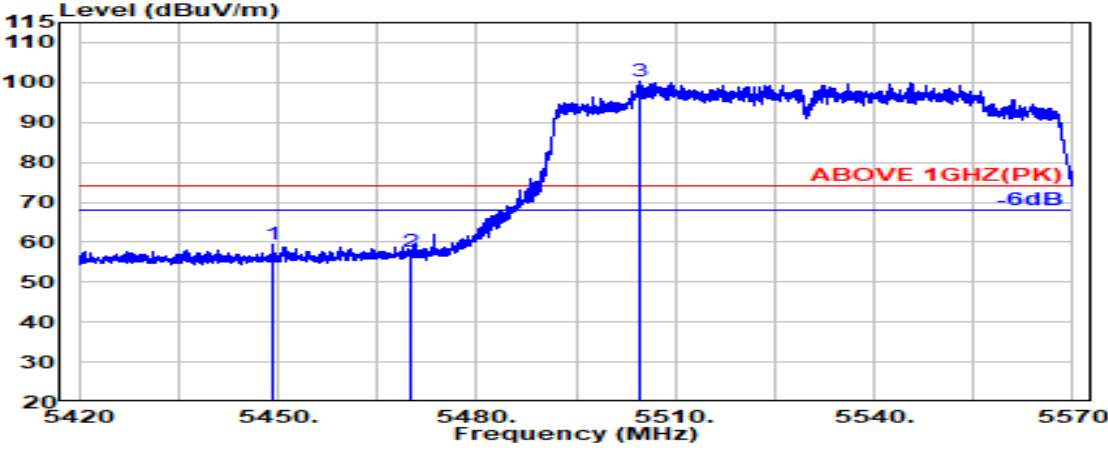

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.271	34.20	8.72	34.22	50.87	59.57	74.00	14.43	Peak
5470.000	34.16	8.74	34.21	48.84	57.52	74.00	16.48	Peak
@ 5504.814	34.10	8.76	34.20	91.50	100.15	---	---	Peak

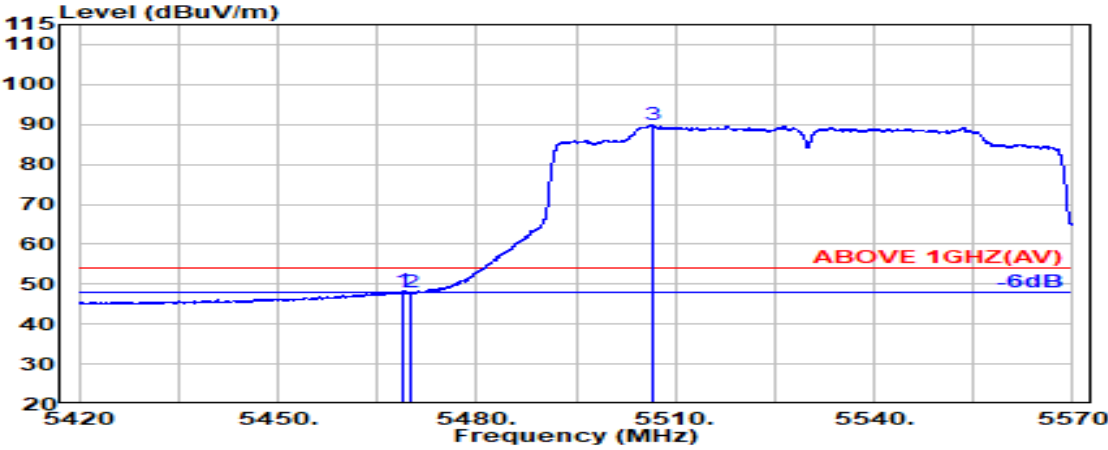


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.943	34.16	8.74	34.21	39.49	48.18	54.00	5.82	Average
5470.000	34.16	8.74	34.21	39.34	48.02	54.00	5.98	Average
@ 5506.571	34.10	8.76	34.20	81.33	89.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

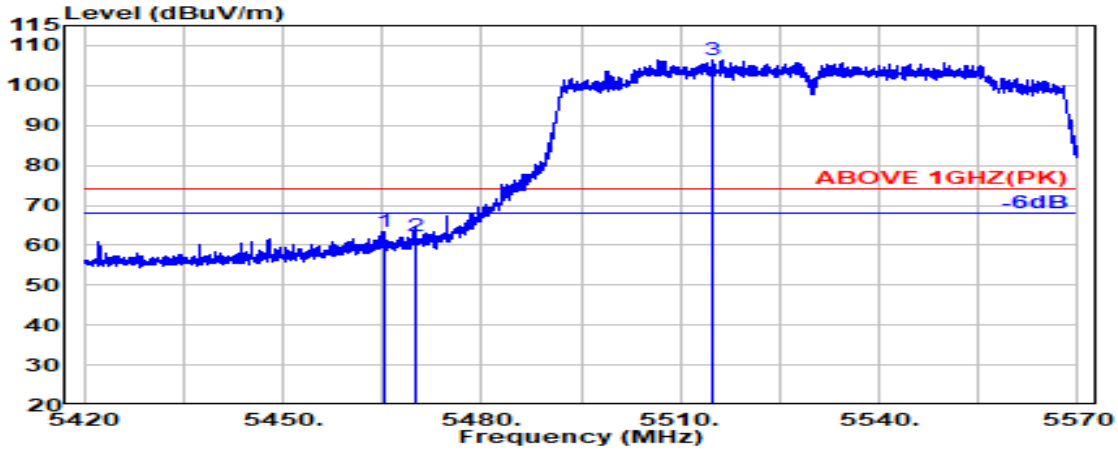

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.471	34.17	8.73	34.21	54.82	63.51	74.00	10.49	Peak
5470.000	34.16	8.74	34.21	53.55	62.23	74.00	11.77	Peak
@ 5514.971	34.10	8.76	34.21	97.85	106.50	---	---	Peak

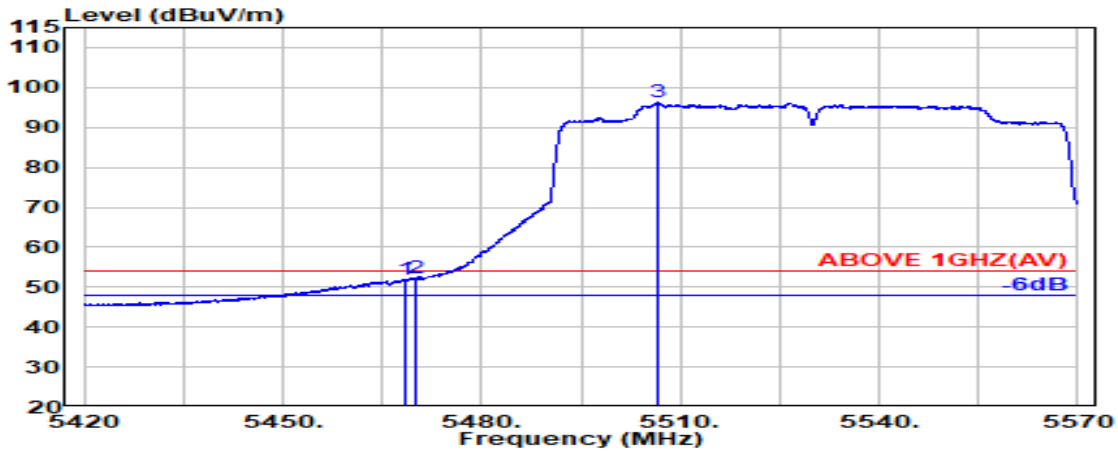


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.514	34.16	8.73	34.21	43.30	51.98	54.00	2.02	Average
5470.000	34.16	8.74	34.21	43.44	52.12	54.00	1.88	Average
@ 5506.486	34.10	8.76	34.20	87.71	96.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

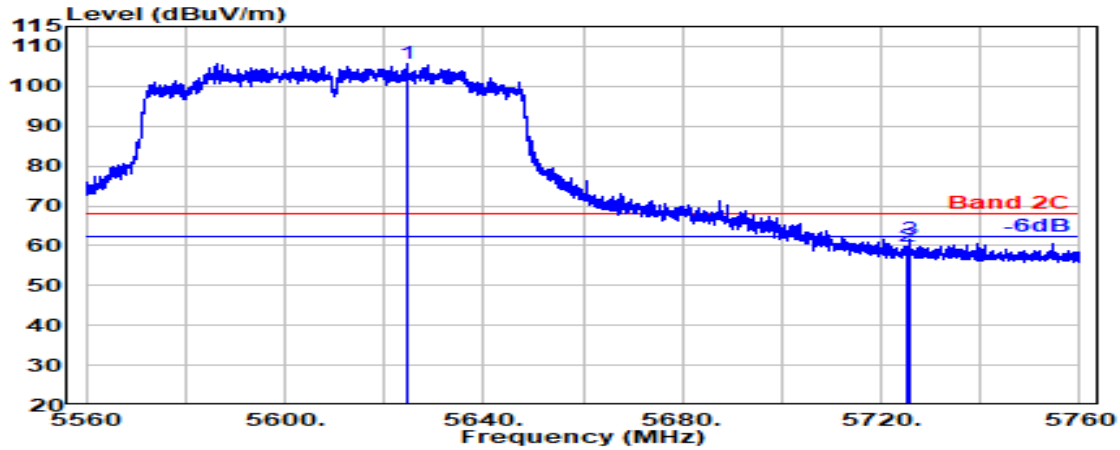

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.457	34.00	8.82	34.26	97.14	105.70	---	---	Peak
5725.000	33.80	8.88	34.31	51.55	59.92	68.20	8.28	Peak
5725.657	33.80	8.88	34.31	53.09	61.46	68.20	6.74	Peak

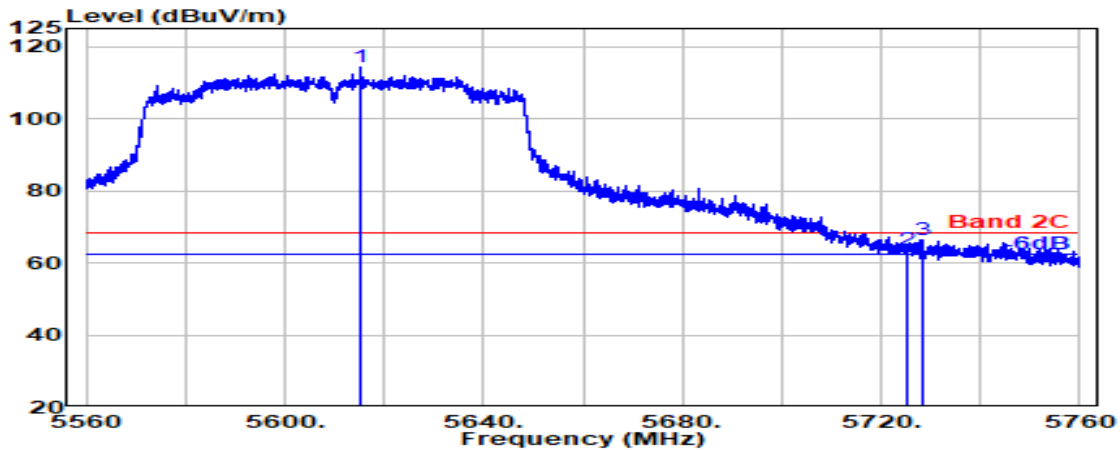


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5615.372	34.00	8.82	34.25	105.66	114.23	---	---	Peak
5725.000	33.80	8.88	34.31	55.08	63.45	68.20	4.75	Peak
5728.400	33.80	8.88	34.31	58.08	66.45	68.20	1.75	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

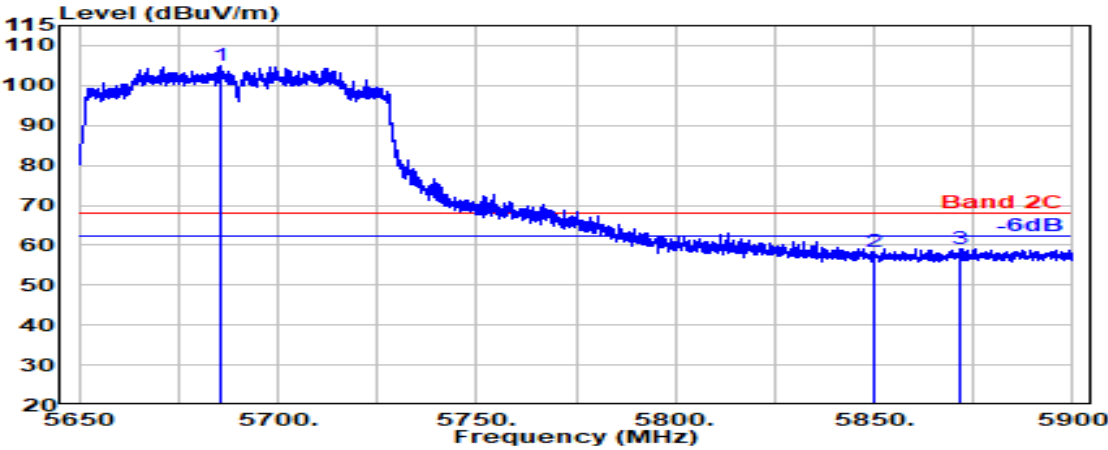

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5685.643	33.86	8.86	34.29	96.42	104.85	---	---	Peak
5850.000	34.10	8.95	34.36	49.51	58.19	68.20	10.01	Peak
5871.857	34.10	8.96	34.37	50.54	59.22	68.20	8.98	Peak

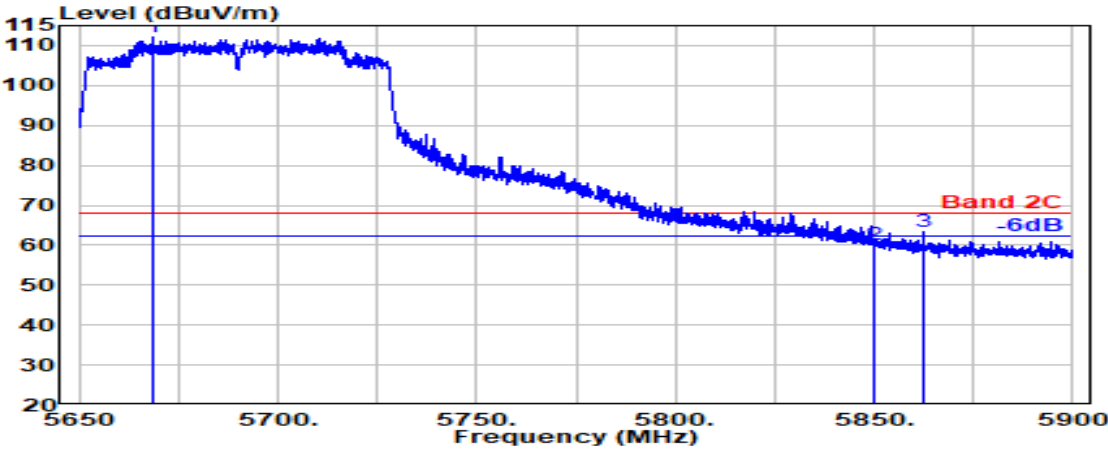


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.786	33.92	8.85	34.28	103.51	112.00	---	---	Peak
5850.000	34.10	8.95	34.36	51.51	60.20	68.20	8.00	Peak
5862.357	34.10	8.96	34.37	54.67	63.35	68.20	4.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

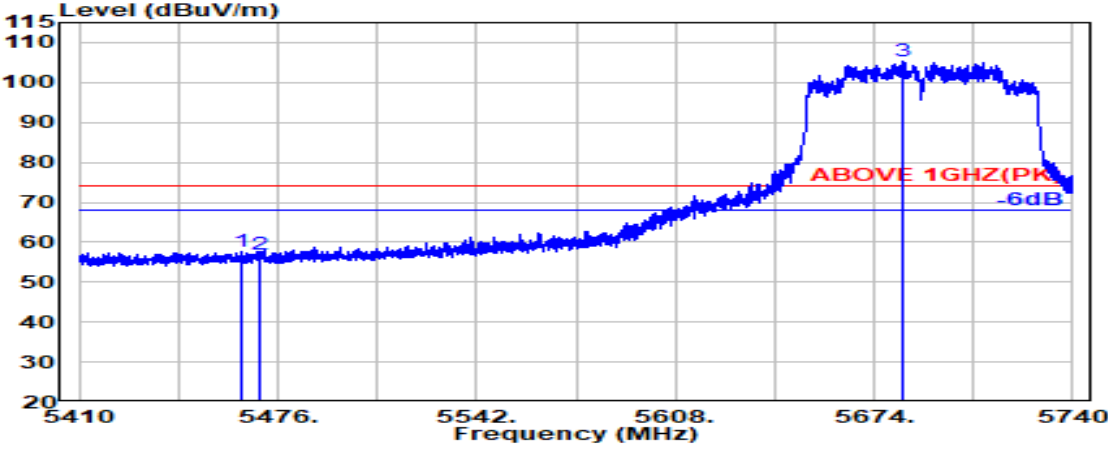

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.648	34.17	8.73	34.21	49.07	57.76	74.00	16.24	Peak
5470.000	34.16	8.74	34.21	48.16	56.85	74.00	17.15	Peak
@ 5683.900	33.86	8.86	34.29	97.04	105.48	---	---	Peak

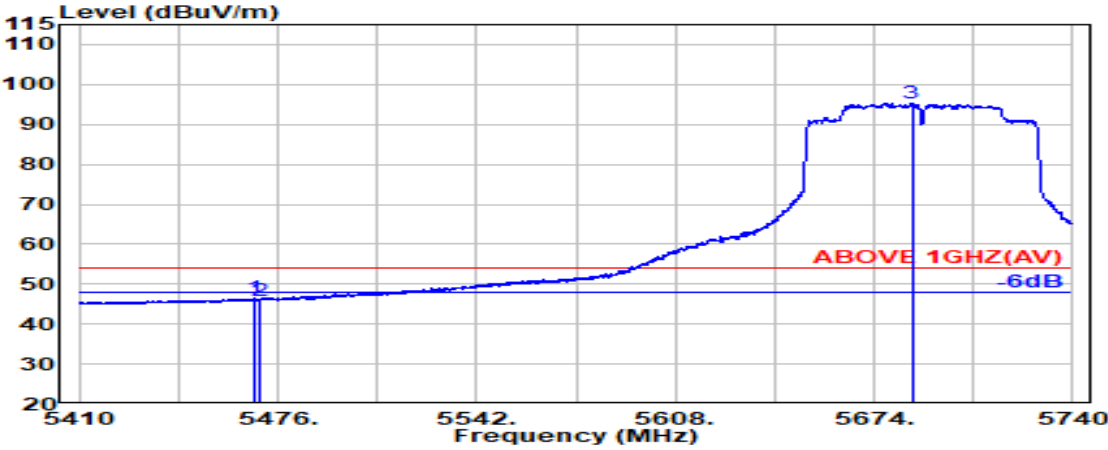


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.551	34.16	8.73	34.21	37.67	46.36	54.00	7.64	Average
5470.000	34.16	8.74	34.21	37.26	45.95	54.00	8.05	Average
@ 5686.540	33.85	8.86	34.29	87.00	95.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

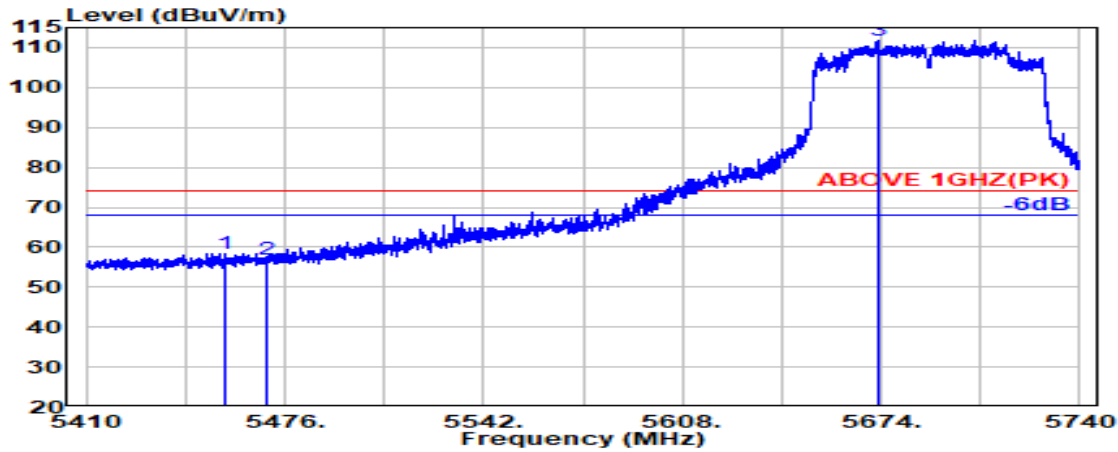

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.823	34.19	8.73	34.22	49.74	58.44	74.00	15.56	Peak
5470.000	34.16	8.74	34.21	48.35	57.04	74.00	16.96	Peak
@ 5672.774	33.91	8.85	34.28	103.37	111.85	---	---	Peak

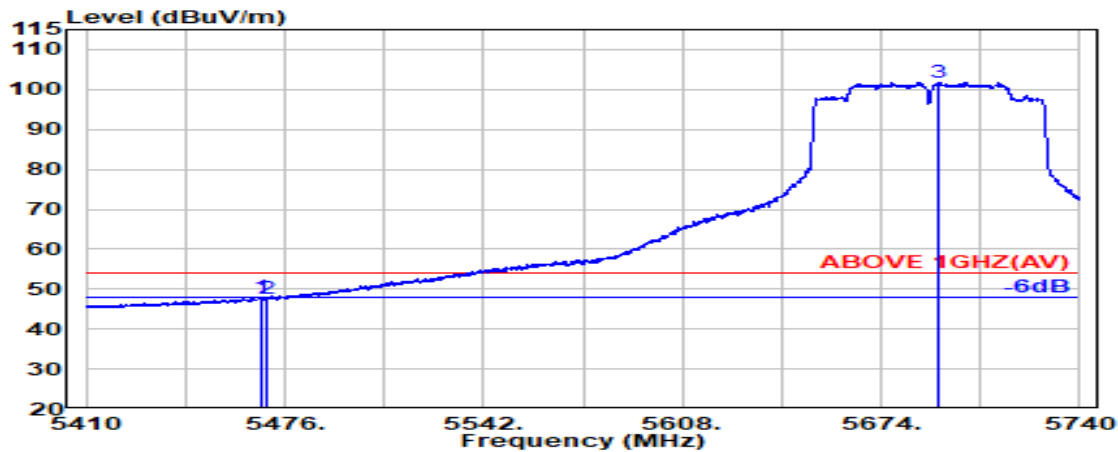


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.646	34.16	8.74	34.21	39.24	47.92	54.00	6.08	Average
5470.000	34.16	8.74	34.21	38.91	47.60	54.00	6.40	Average
@ 5693.329	33.83	8.86	34.29	93.42	101.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

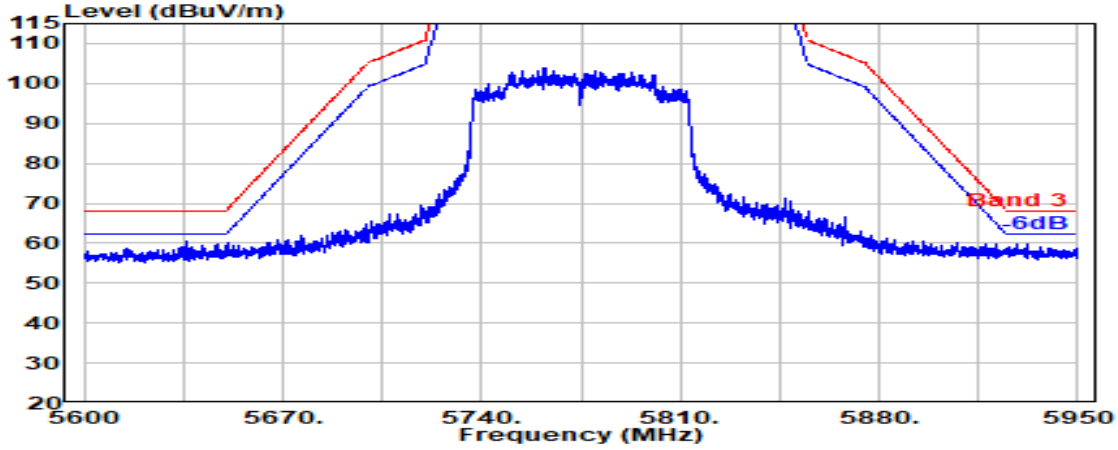


Antenna at Vertical Polarization

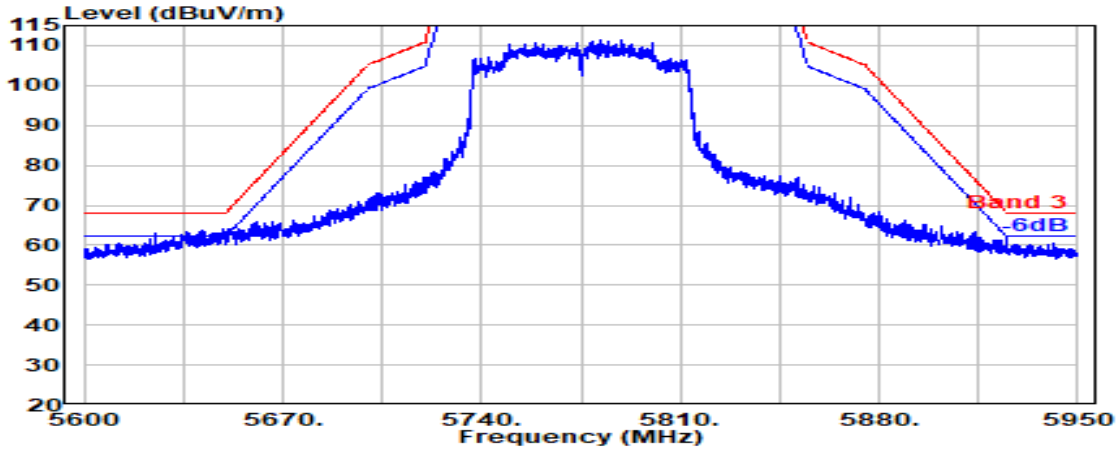




Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

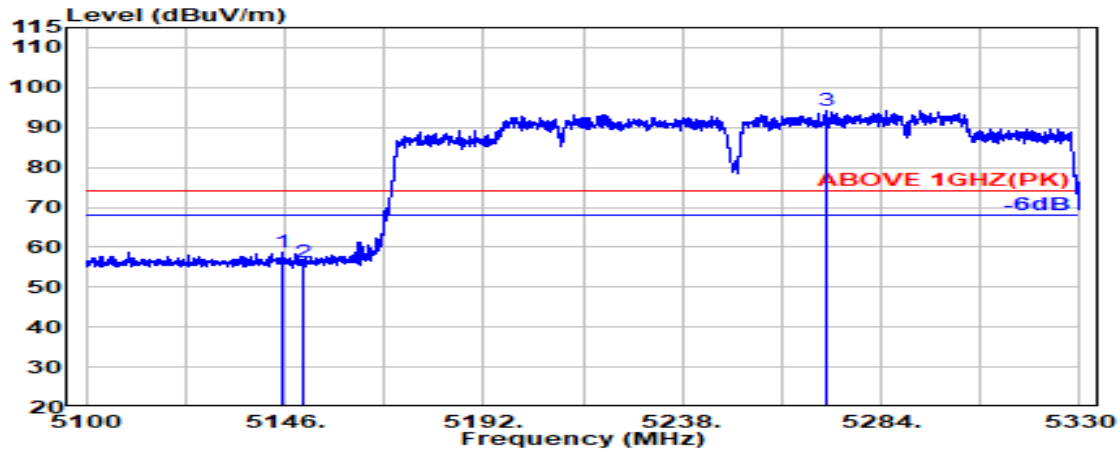

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.70	8.54	34.34	50.68	58.58	74.00	15.42	Peak
5150.000	33.70	8.54	34.34	48.43	56.34	74.00	17.66	Peak
@ 5271.600	33.93	8.62	34.29	85.84	94.09	---	---	Peak

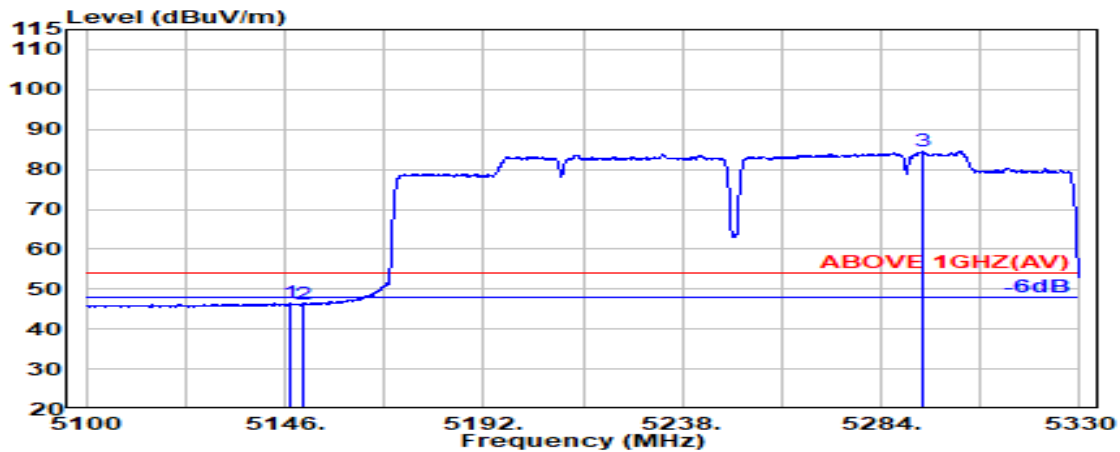


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.70	8.54	34.34	38.56	46.47	54.00	7.53	Average
5150.000	33.70	8.54	34.34	38.20	46.10	54.00	7.90	Average
@ 5293.500	34.06	8.63	34.28	76.23	84.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

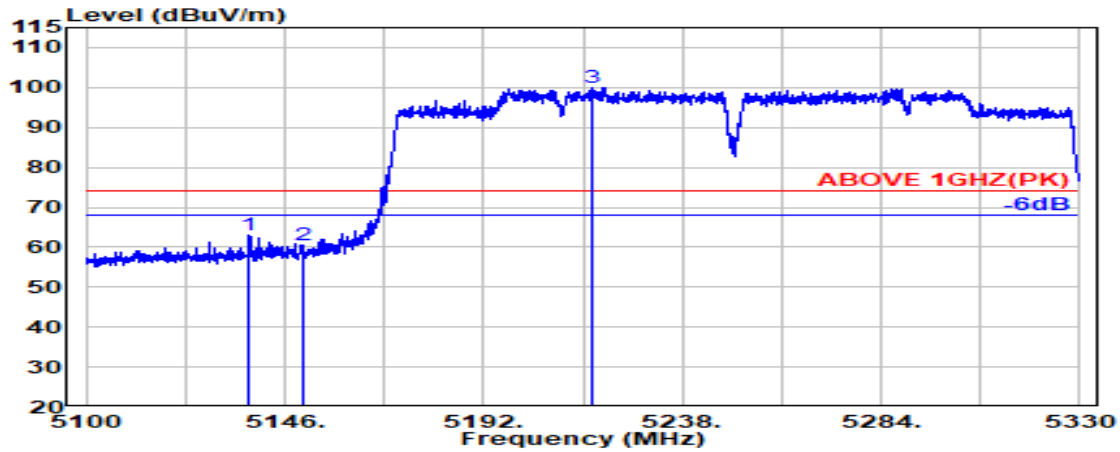

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.800	33.70	8.54	34.34	55.00	62.89	74.00	11.11	Peak
5150.000	33.70	8.54	34.34	52.62	60.53	74.00	13.47	Peak
@ 5217.100	33.73	8.59	34.31	91.95	99.96	---	---	Peak

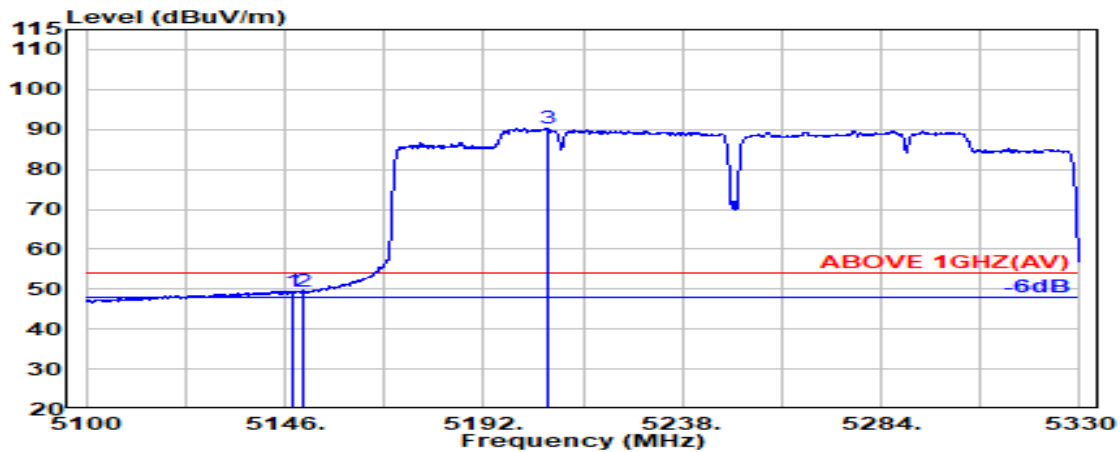


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	33.70	8.54	34.34	41.63	49.53	54.00	4.47	Average
5150.000	33.70	8.54	34.34	41.46	49.37	54.00	4.63	Average
@ 5206.700	33.71	8.58	34.32	82.39	90.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

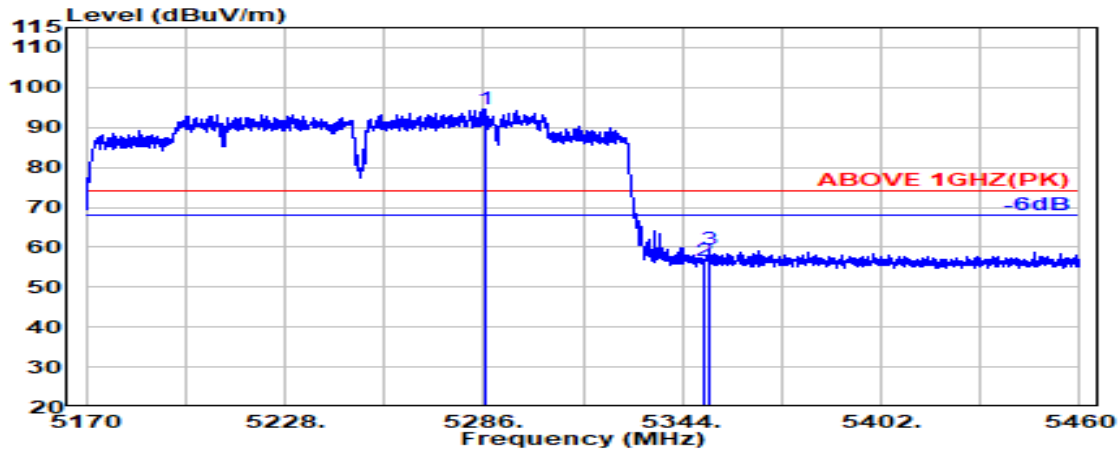

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.400	34.02	8.63	34.28	86.18	94.54	---	---	Peak
5350.000	33.90	8.67	34.26	48.37	56.68	74.00	17.32	Peak
5351.700	33.91	8.67	34.26	51.18	59.50	74.00	14.50	Peak

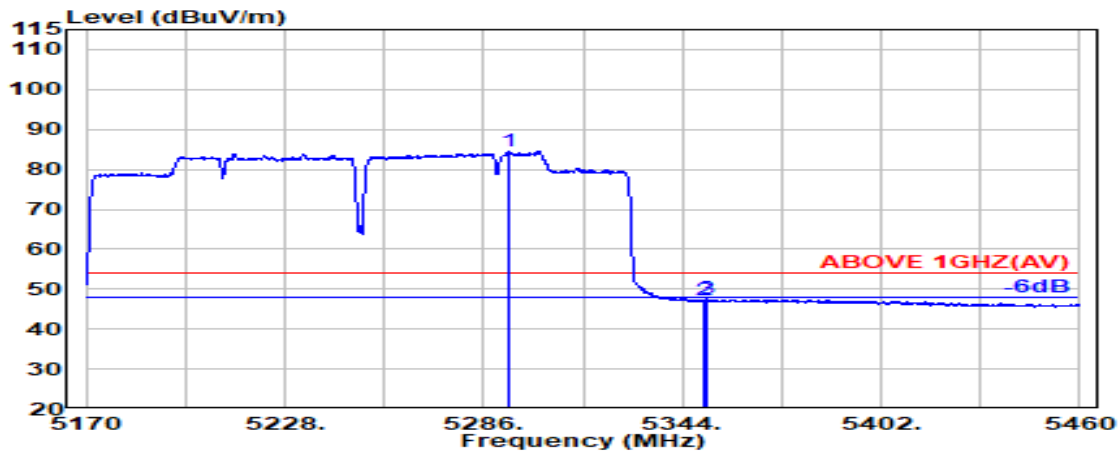


## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.600	34.06	8.63	34.28	76.14	84.55	---	---	Average
5350.000	33.90	8.67	34.26	39.01	47.32	54.00	6.68	Average
5351.200	33.90	8.67	34.26	39.16	47.48	54.00	6.52	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

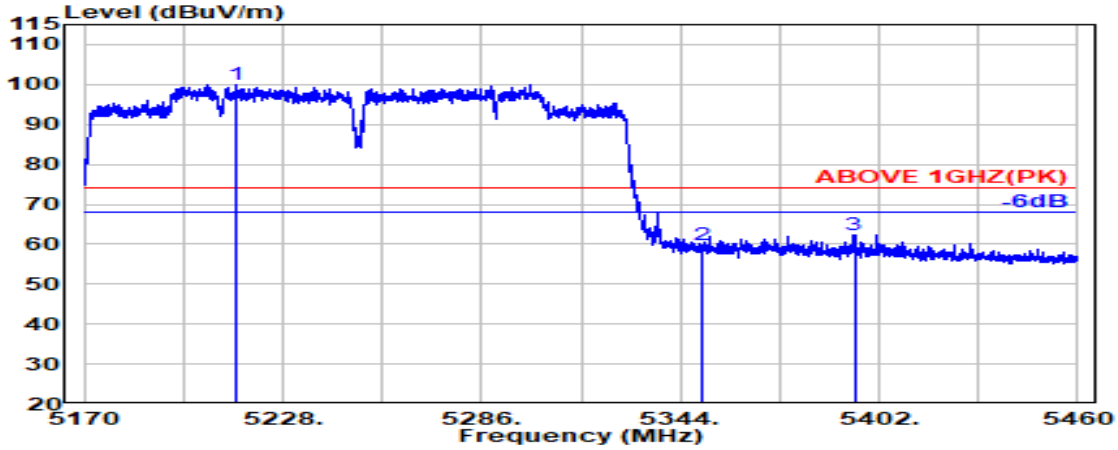

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5214.600	33.73	8.58	34.31	91.98	99.98	---	---	Peak
5350.000	33.90	8.67	34.26	51.49	59.80	74.00	14.20	Peak
5394.800	34.08	8.69	34.24	53.88	62.41	74.00	11.59	Peak

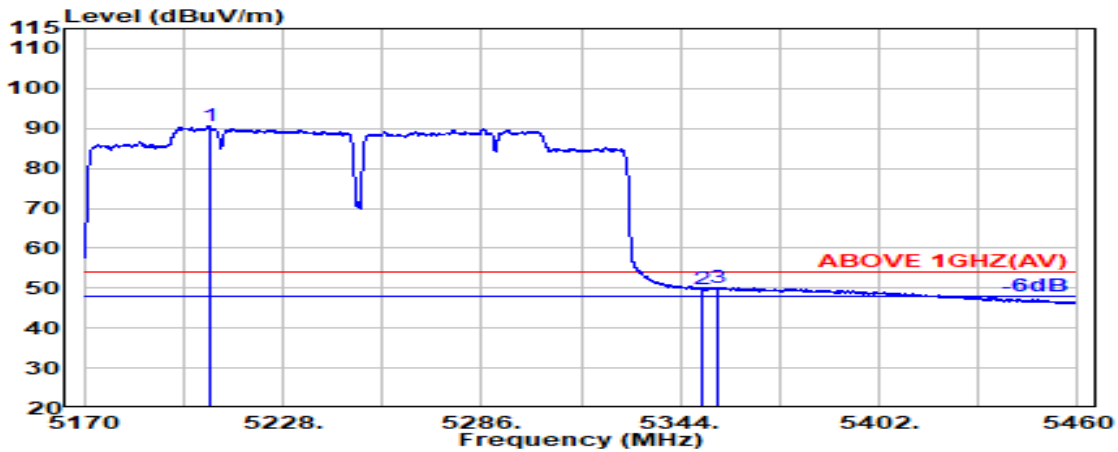


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.500	33.71	8.58	34.32	82.76	90.74	---	---	Average
5350.000	33.90	8.67	34.26	41.55	49.85	54.00	4.15	Average
5355.100	33.92	8.67	34.26	41.86	50.19	54.00	3.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

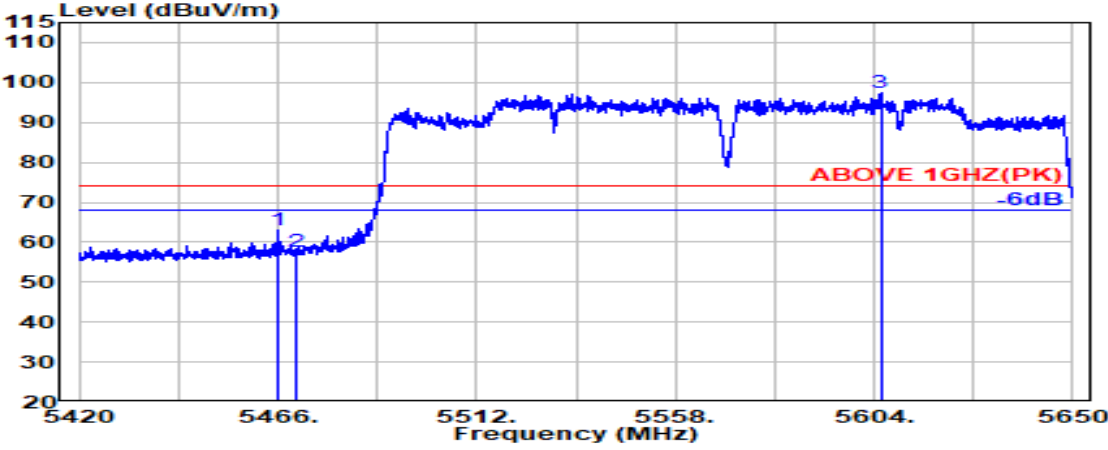

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.21	54.29	62.98	74.00	11.02	Peak
5470.000	34.16	8.74	34.21	48.91	57.60	74.00	16.40	Peak
@ 5605.500	34.00	8.81	34.25	89.04	97.60	---	---	Peak

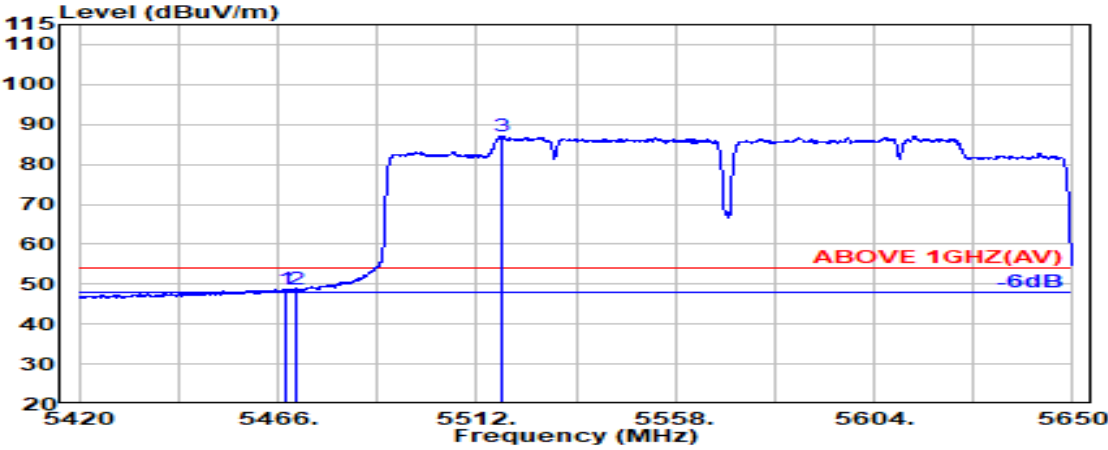


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.21	40.07	48.76	54.00	5.24	Average
5470.000	34.16	8.74	34.21	39.84	48.53	54.00	5.47	Average
@ 5517.700	34.10	8.76	34.21	78.46	87.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

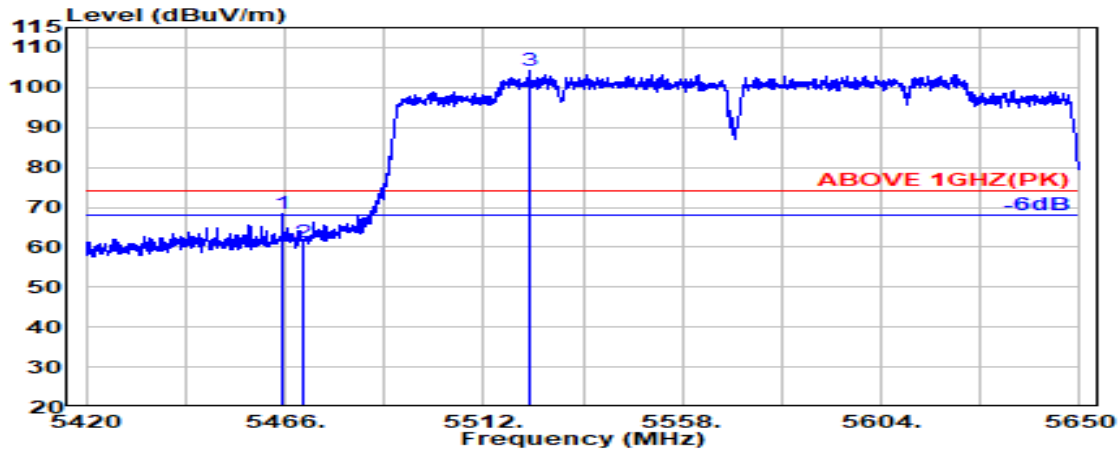

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.17	8.73	34.21	59.61	68.30	74.00	5.70	Peak
5470.000	34.16	8.74	34.21	52.57	61.25	74.00	12.75	Peak
@ 5522.400	34.10	8.77	34.21	95.46	104.11	---	---	Peak

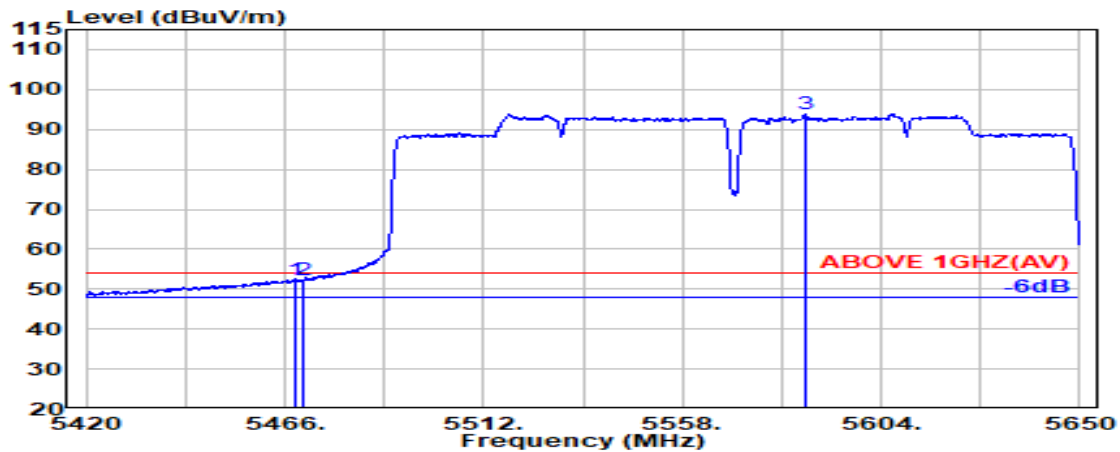


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.21	43.76	52.44	54.00	1.56	Average
5470.000	34.16	8.74	34.21	43.61	52.29	54.00	1.71	Average
@ 5586.700	34.03	8.80	34.24	85.31	93.89	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

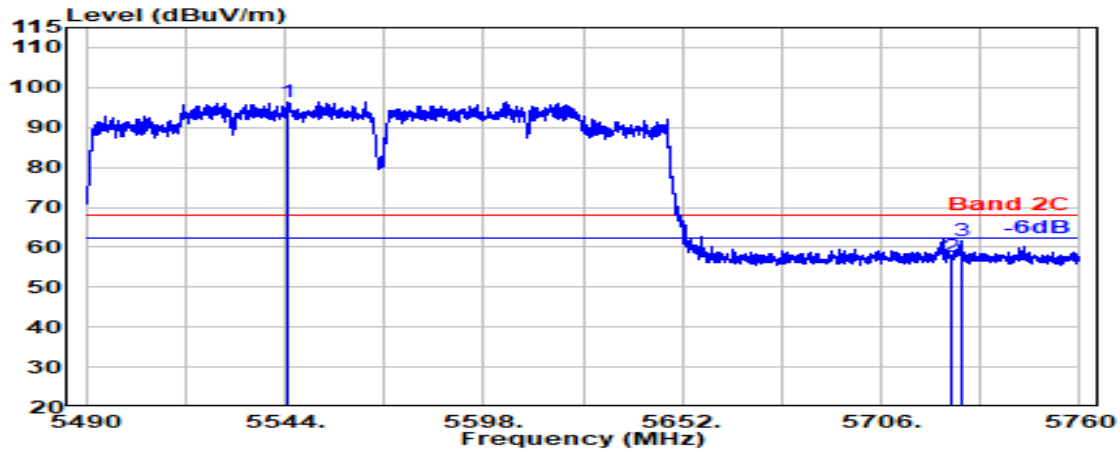

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5545.000	34.10	8.78	34.22	87.71	96.37	---	---	Peak
5725.000	33.80	8.88	34.31	49.43	57.81	68.20	10.39	Peak
5727.700	33.80	8.88	34.31	53.26	61.63	68.20	6.57	Peak

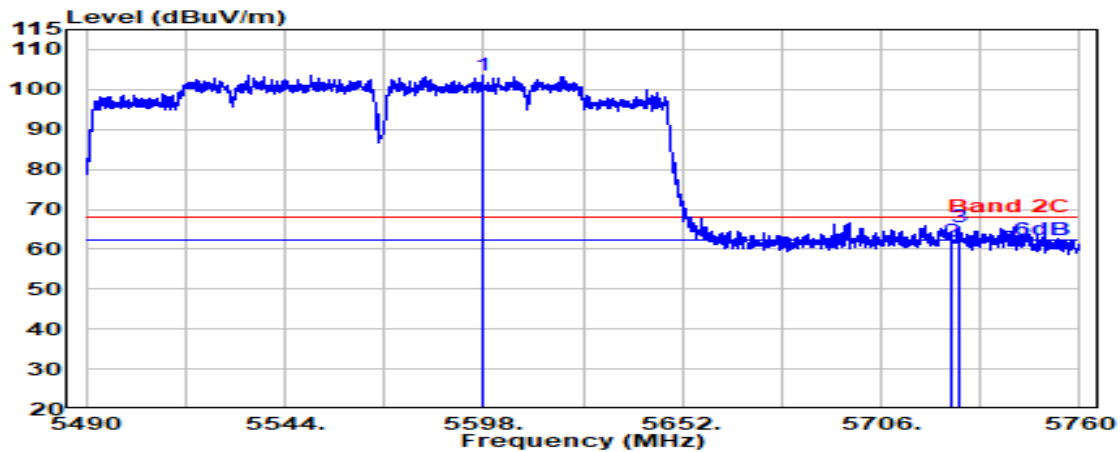


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5597.800	34.00	8.81	34.25	95.13	103.70	---	---	Peak
5725.000	33.80	8.88	34.31	53.71	62.08	68.20	6.12	Peak
5727.500	33.80	8.88	34.31	57.11	65.49	68.20	2.71	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

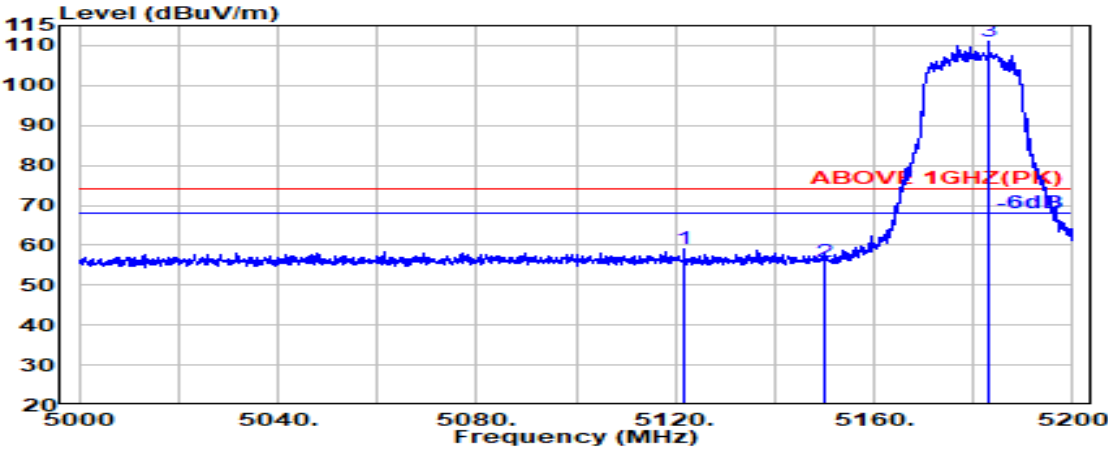

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.800	33.70	8.53	34.35	51.02	58.90	74.00	15.10	Peak
5150.000	33.70	8.54	34.34	47.92	55.83	74.00	18.17	Peak
@ 5182.900	33.70	8.56	34.32	103.13	111.07	---	---	Peak

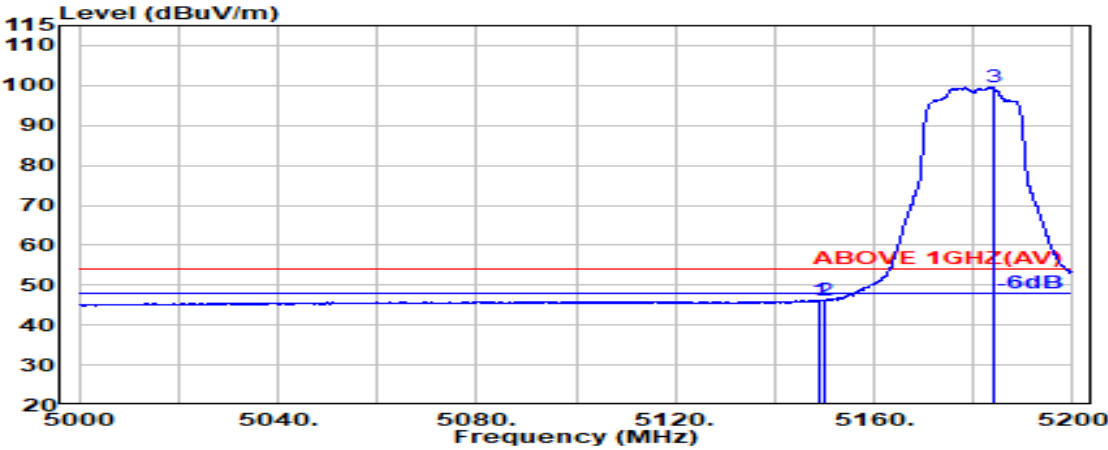


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.70	8.54	34.34	38.39	46.29	54.00	7.71	Average
5150.000	33.70	8.54	34.34	38.16	46.06	54.00	7.94	Average
@ 5183.900	33.70	8.56	34.32	91.58	99.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

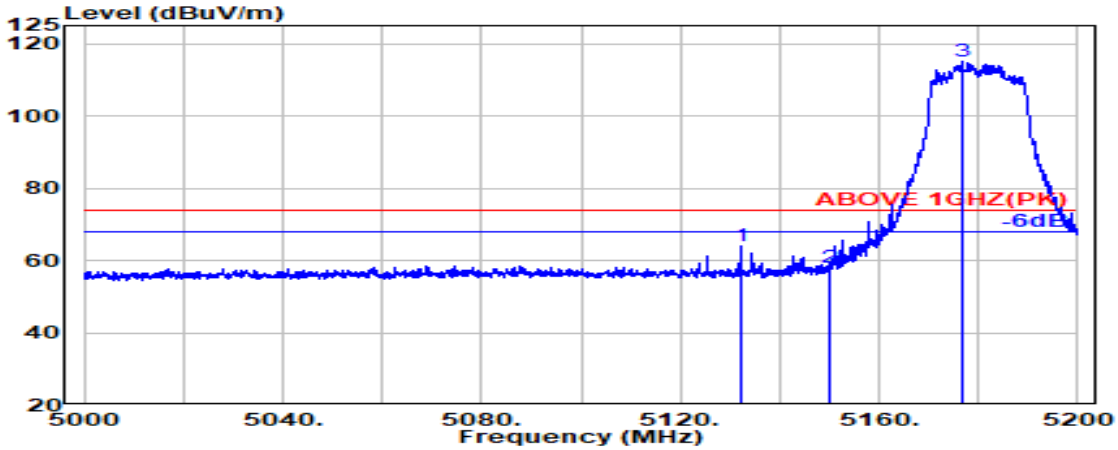

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.100	33.70	8.53	34.35	56.10	63.98	74.00	10.02	Peak
5150.000	33.70	8.54	34.34	50.08	57.99	74.00	16.01	Peak
@ 5176.800	33.70	8.56	34.33	107.05	114.98	---	---	Peak

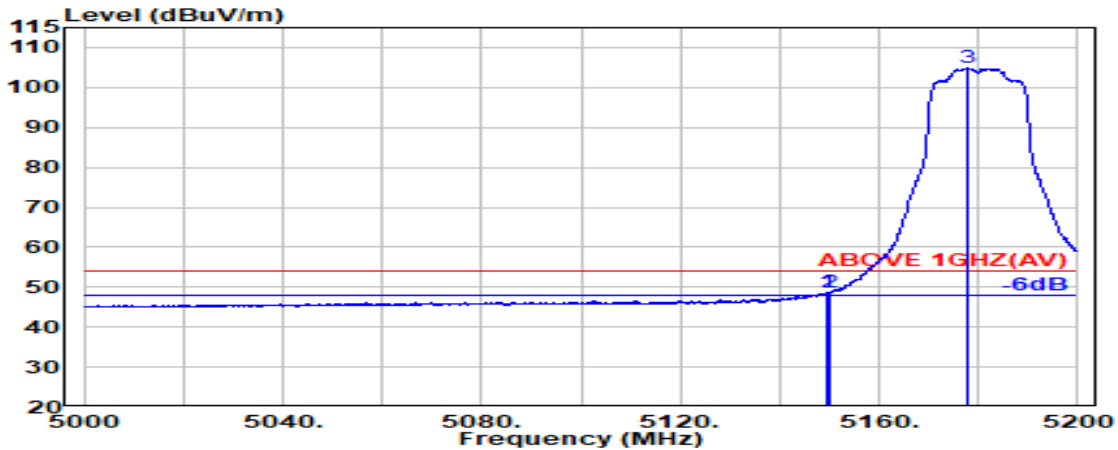


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.34	40.68	48.58	54.00	5.42	Average
5150.000	33.70	8.54	34.34	40.72	48.63	54.00	5.37	Average
@ 5177.600	33.70	8.56	34.33	97.00	104.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

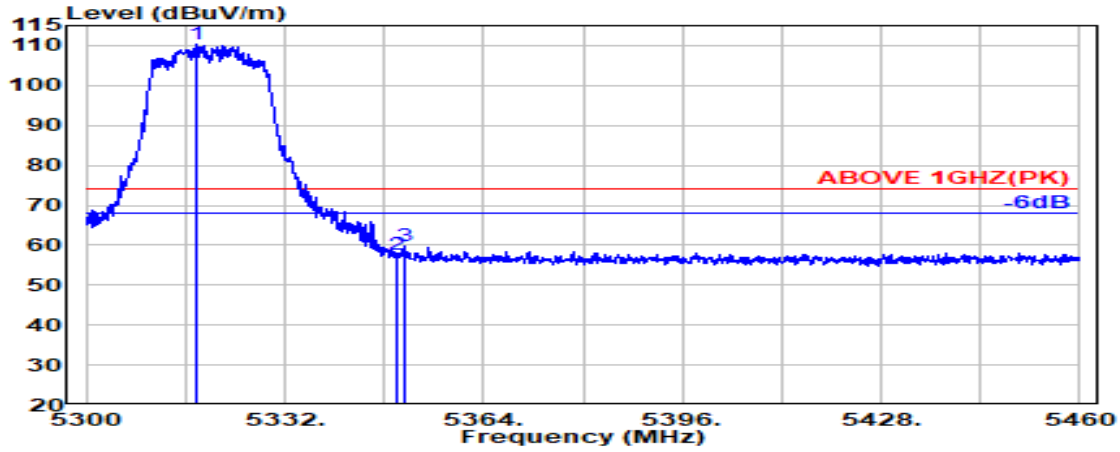

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.800	34.03	8.65	34.27	101.86	110.26	---	---	Peak
5350.000	33.90	8.67	34.26	49.29	57.60	74.00	16.40	Peak
5351.100	33.90	8.67	34.26	51.46	59.77	74.00	14.23	Peak

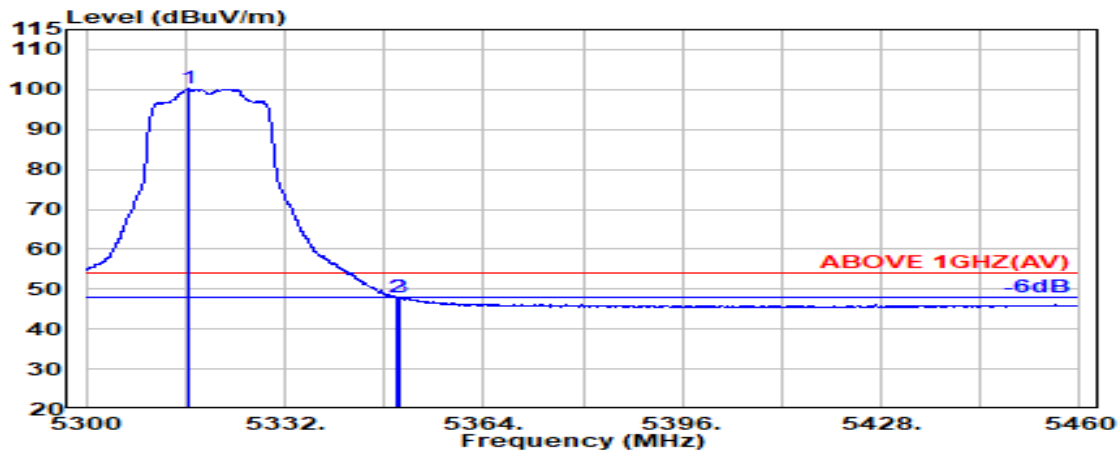


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.400	34.03	8.65	34.27	91.76	100.16	---	---	Average
5350.000	33.90	8.67	34.26	39.60	47.91	54.00	6.09	Average
5350.400	33.90	8.67	34.26	39.50	47.81	54.00	6.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

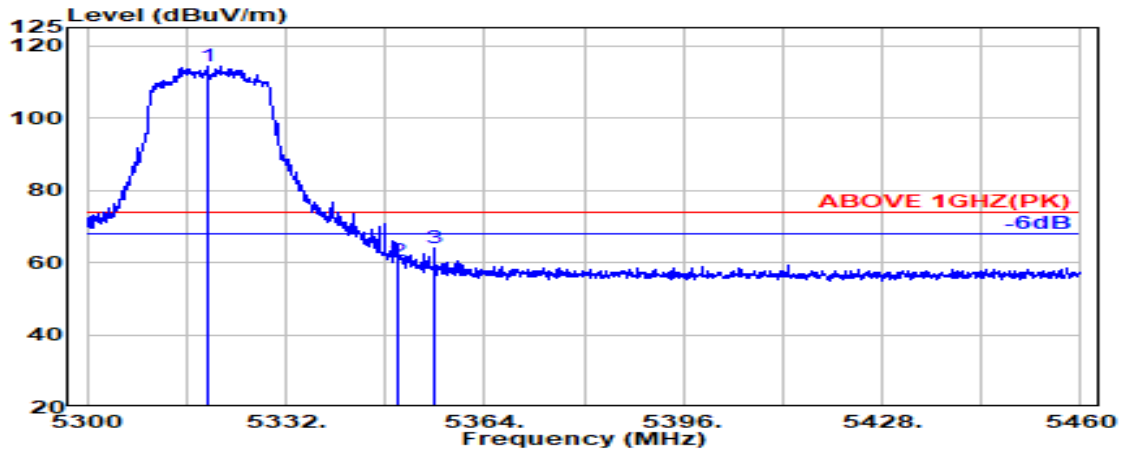

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.300	34.02	8.65	34.27	106.09	114.49	---	---	Peak
5350.000	33.90	8.67	34.26	52.26	60.57	74.00	13.43	Peak
5355.800	33.92	8.67	34.26	55.61	63.95	74.00	10.05	Peak

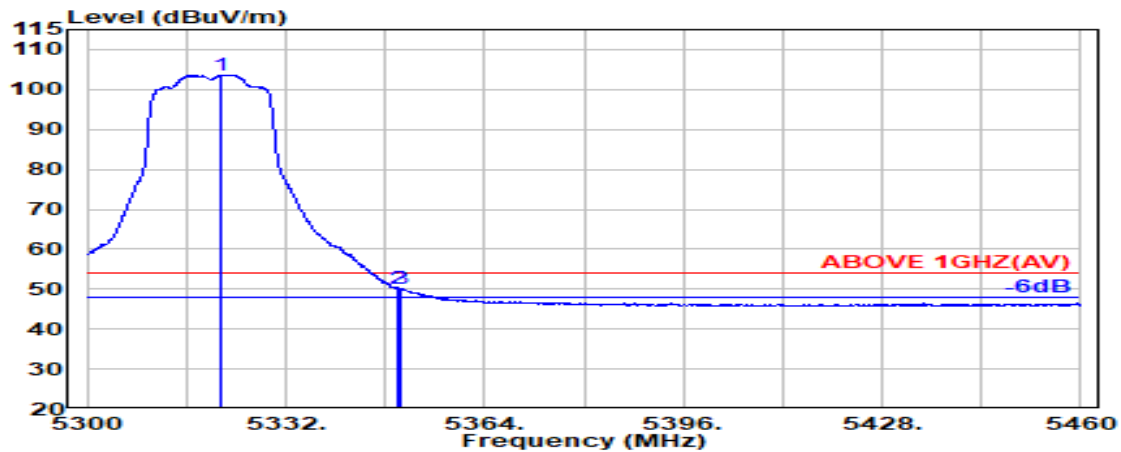


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	34.01	8.65	34.27	95.26	103.66	---	---	Average
5350.000	33.90	8.67	34.26	41.76	50.07	54.00	3.93	Average
5350.400	33.90	8.67	34.26	41.86	50.17	54.00	3.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

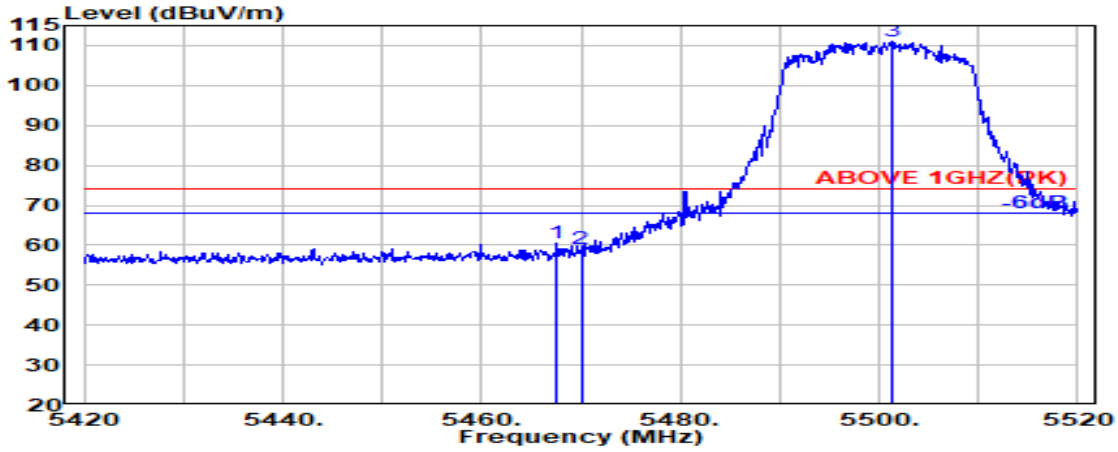

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.21	51.70	60.38	74.00	13.62	Peak
5470.000	34.16	8.74	34.21	50.33	59.01	74.00	14.99	Peak
@ 5501.300	34.10	8.75	34.20	102.30	110.96	---	---	Peak

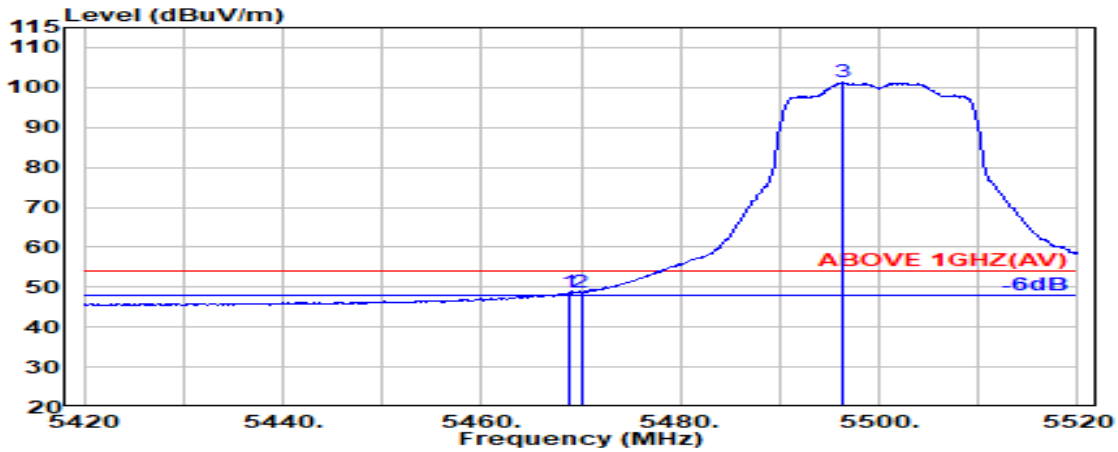


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.21	40.07	48.75	54.00	5.25	Average
5470.000	34.16	8.74	34.21	40.16	48.85	54.00	5.15	Average
@ 5496.400	34.11	8.75	34.20	92.60	101.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

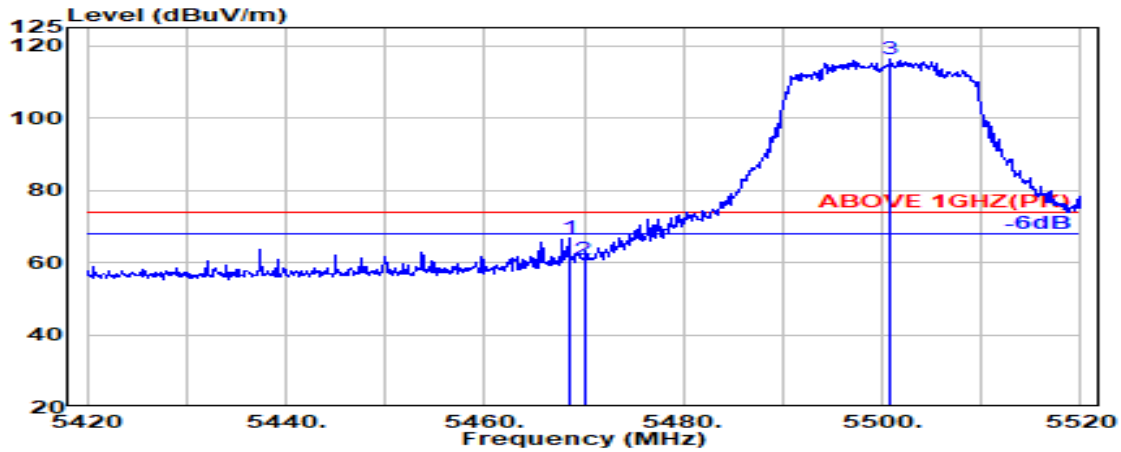

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.21	58.26	66.95	74.00	7.05	Peak
5470.000	34.16	8.74	34.21	52.32	61.01	74.00	12.99	Peak
@ 5500.800	34.10	8.75	34.20	107.49	116.14	---	---	Peak

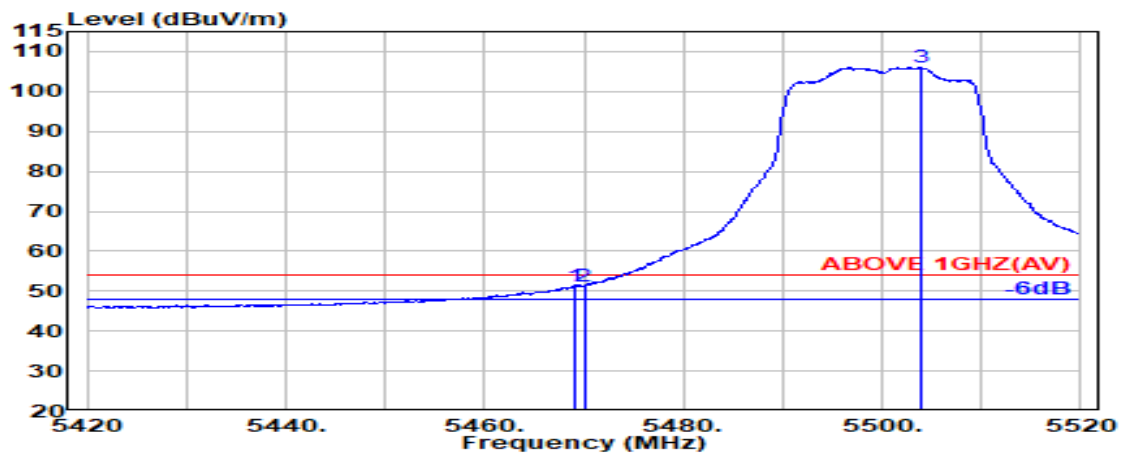


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.21	42.51	51.20	54.00	2.80	Average
5470.000	34.16	8.74	34.21	42.53	51.22	54.00	2.78	Average
@ 5503.900	34.10	8.76	34.20	97.45	106.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

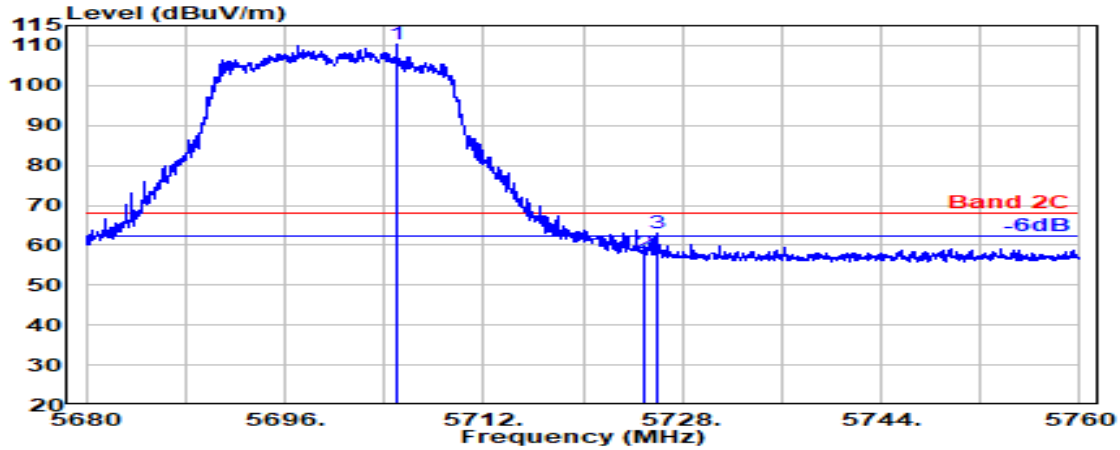

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.050	33.80	8.87	34.30	101.80	110.17	---	---	Peak
5725.000	33.80	8.88	34.31	49.51	57.88	68.20	10.32	Peak
5726.050	33.80	8.88	34.31	54.57	62.94	68.20	5.26	Peak

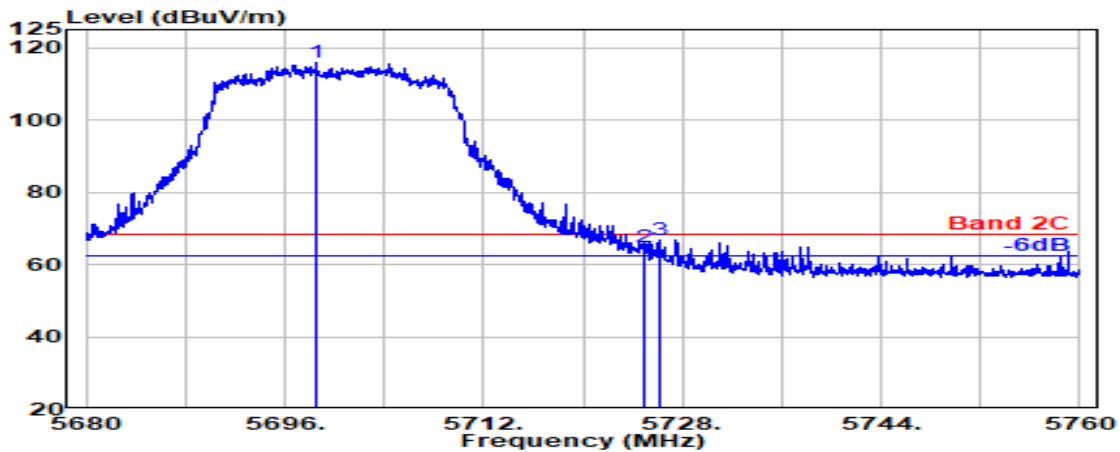


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.550	33.81	8.87	34.29	107.33	115.71	---	---	Peak
5725.000	33.80	8.88	34.31	56.40	64.78	68.20	3.42	Peak
5726.150	33.80	8.88	34.31	58.20	66.57	68.20	1.63	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

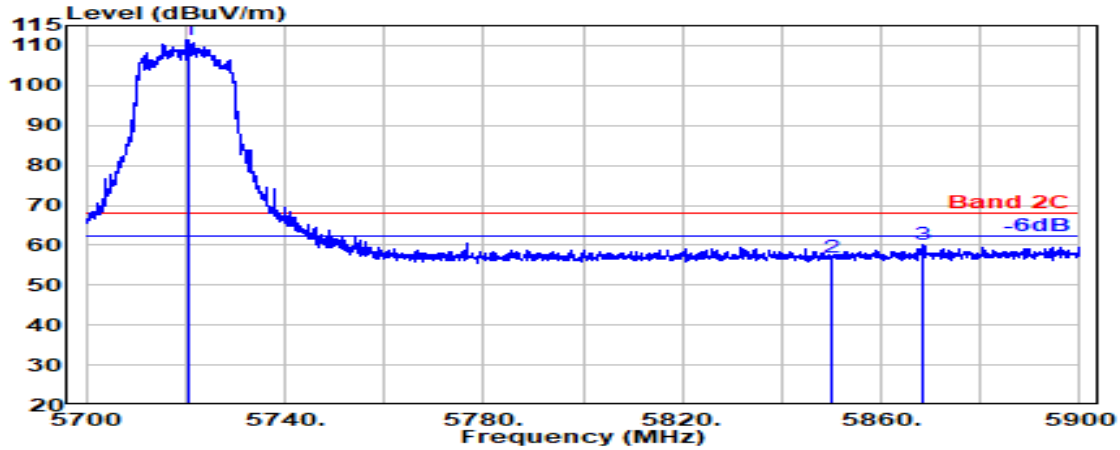

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.400	33.80	8.88	34.30	103.16	111.53	---	---	Peak
5850.000	34.10	8.95	34.36	48.27	56.96	68.20	11.24	Peak
5868.600	34.10	8.96	34.37	51.58	60.27	68.20	7.93	Peak

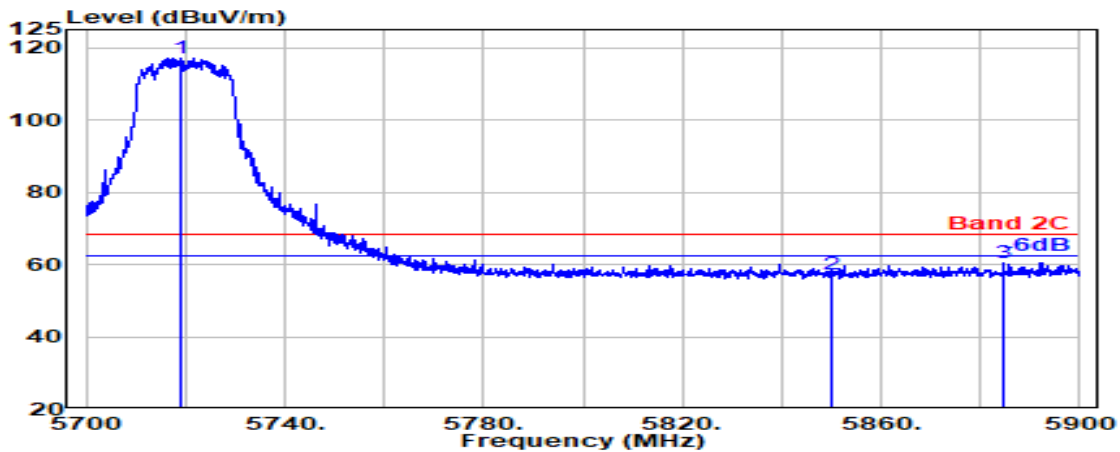


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.900	33.80	8.88	34.30	108.90	117.27	---	---	Peak
5850.000	34.10	8.95	34.36	48.63	57.31	68.20	10.89	Peak
5884.500	34.10	8.97	34.38	51.84	60.53	68.20	7.67	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

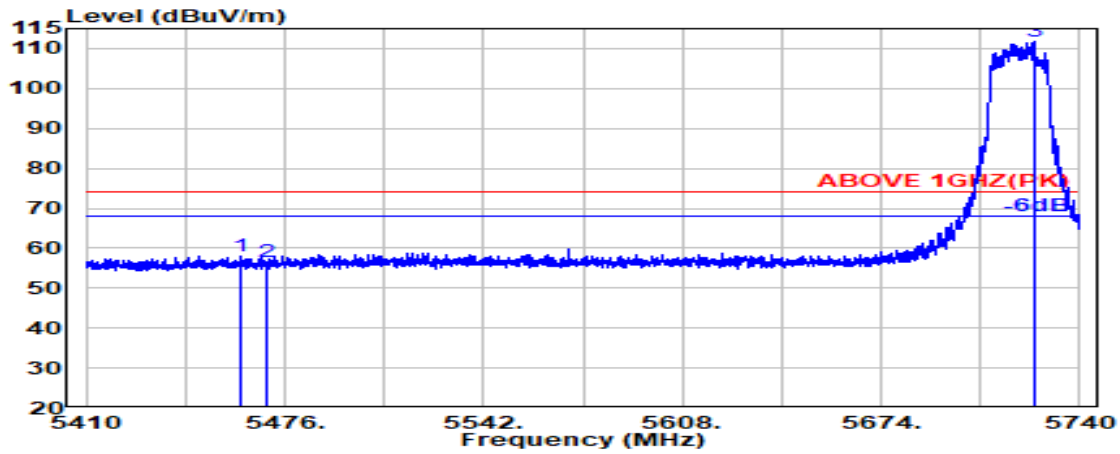

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.18	8.73	34.21	49.35	58.05	74.00	15.95	Peak
5470.000	34.16	8.74	34.21	48.05	56.73	74.00	17.27	Peak
@ 5724.600	33.80	8.88	34.31	103.34	111.72	---	---	Peak

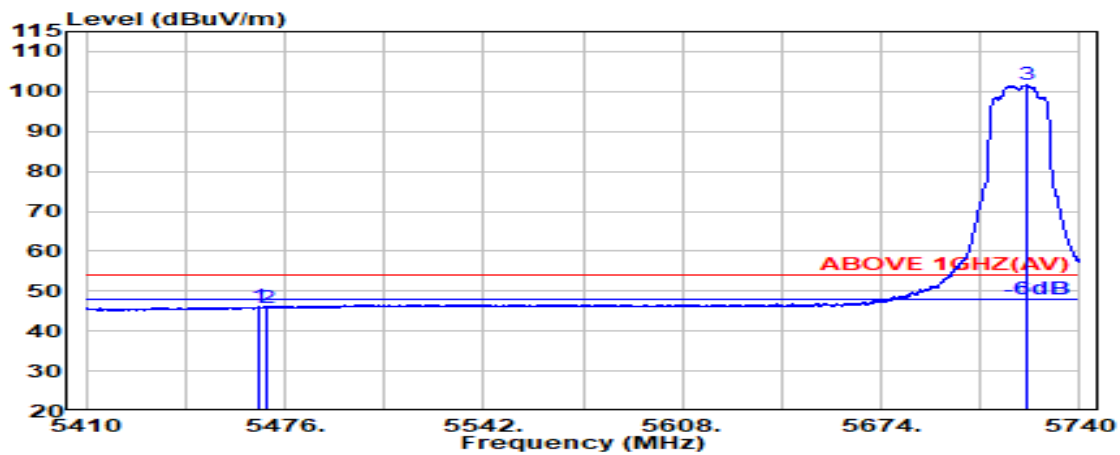


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.16	8.73	34.21	37.52	46.20	54.00	7.80	Average
5470.000	34.16	8.74	34.21	37.16	45.85	54.00	8.15	Average
@ 5722.400	33.80	8.88	34.30	93.31	101.69	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

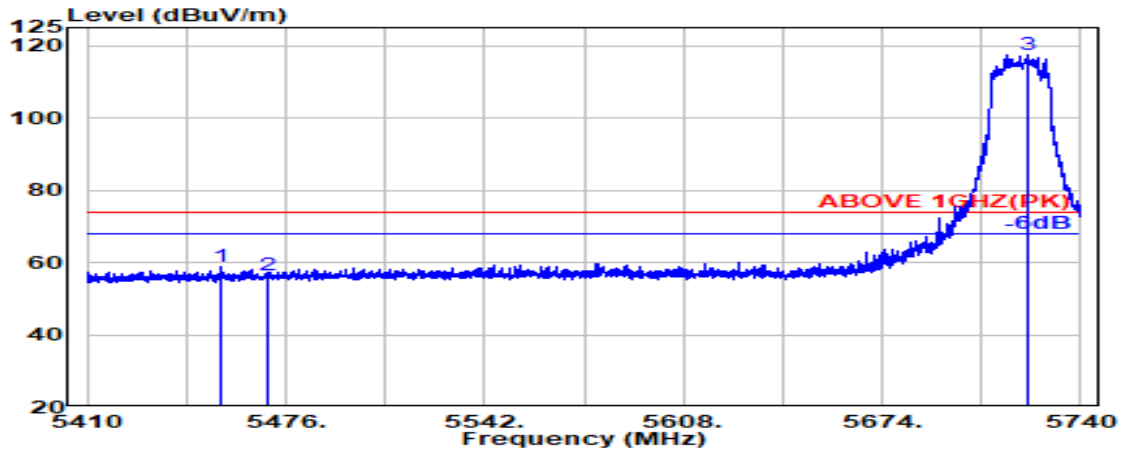

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.500	34.19	8.73	34.22	49.96	58.67	74.00	15.33	Peak
5470.000	34.16	8.74	34.21	47.65	56.33	74.00	17.67	Peak
@ 5722.200	33.80	8.88	34.30	109.24	117.61	---	---	Peak

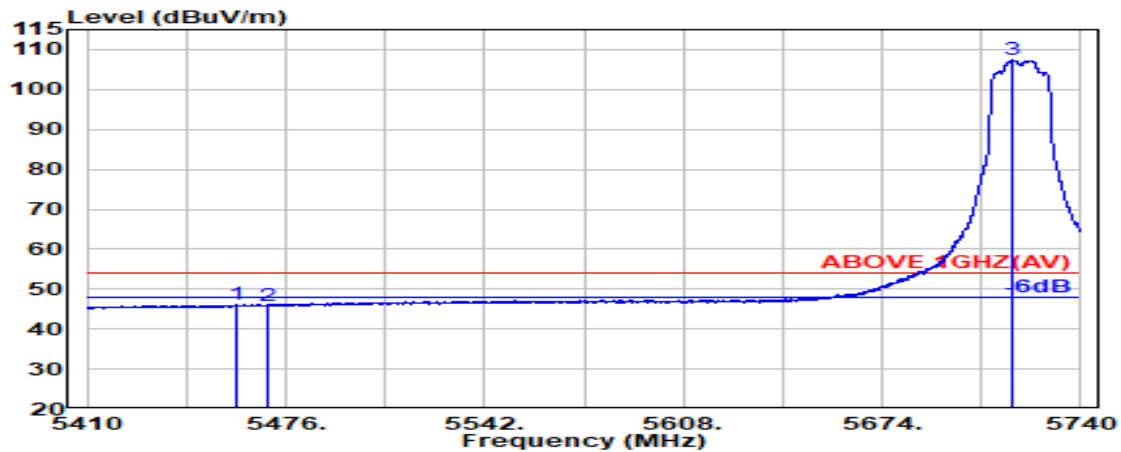


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.000	34.18	8.73	34.22	37.50	46.19	54.00	7.81	Average
5470.000	34.16	8.74	34.21	37.18	45.86	54.00	8.14	Average
@ 5716.900	33.80	8.88	34.30	99.09	107.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

## Antenna at Horizontal Polarization

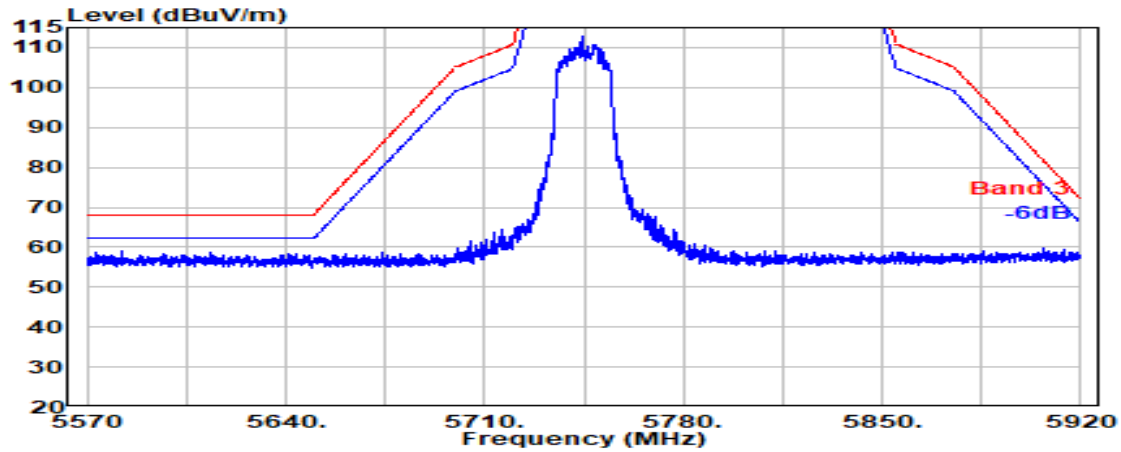


## Antenna at Vertical Polarization

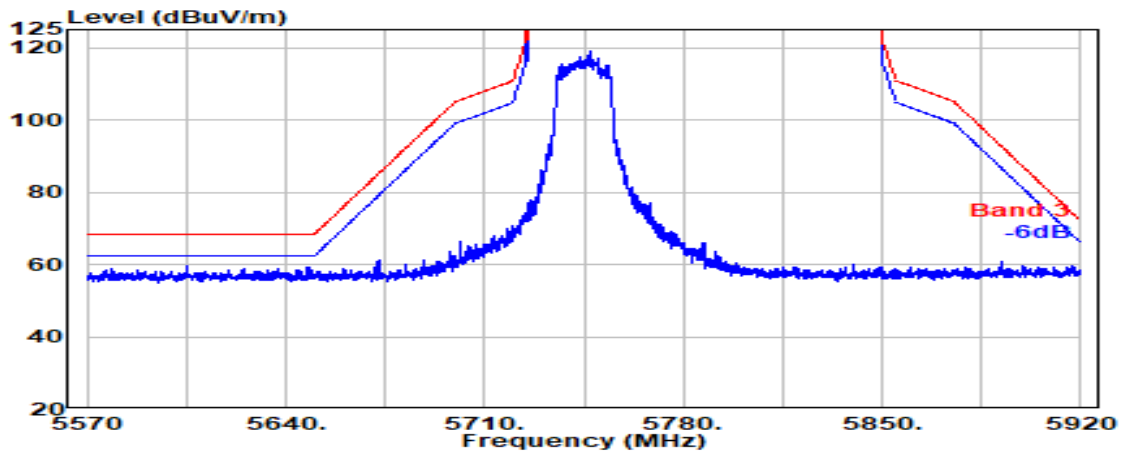


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

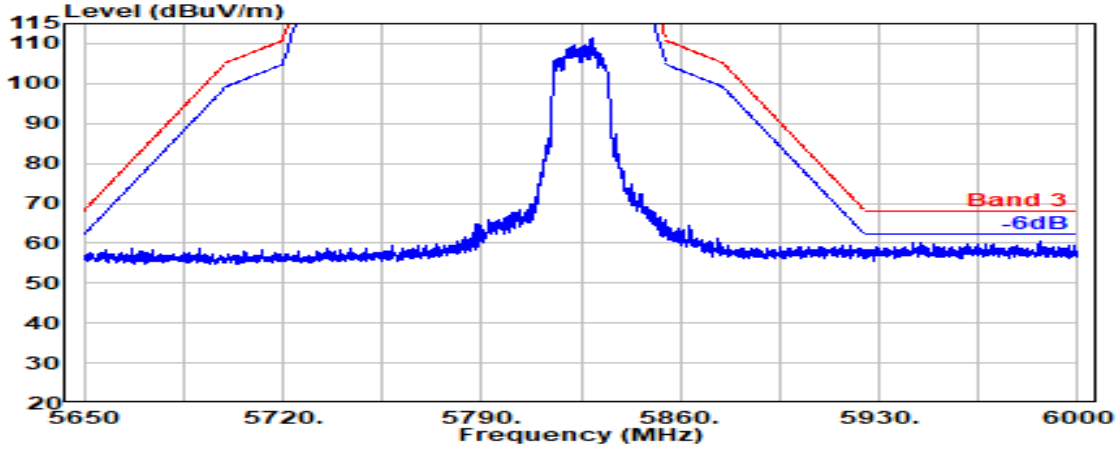

Antenna at Vertical Polarization

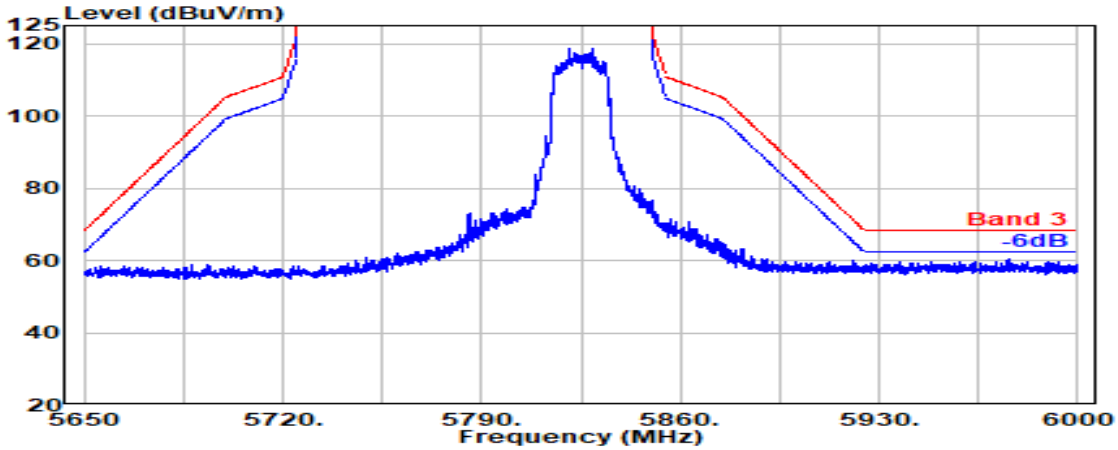


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

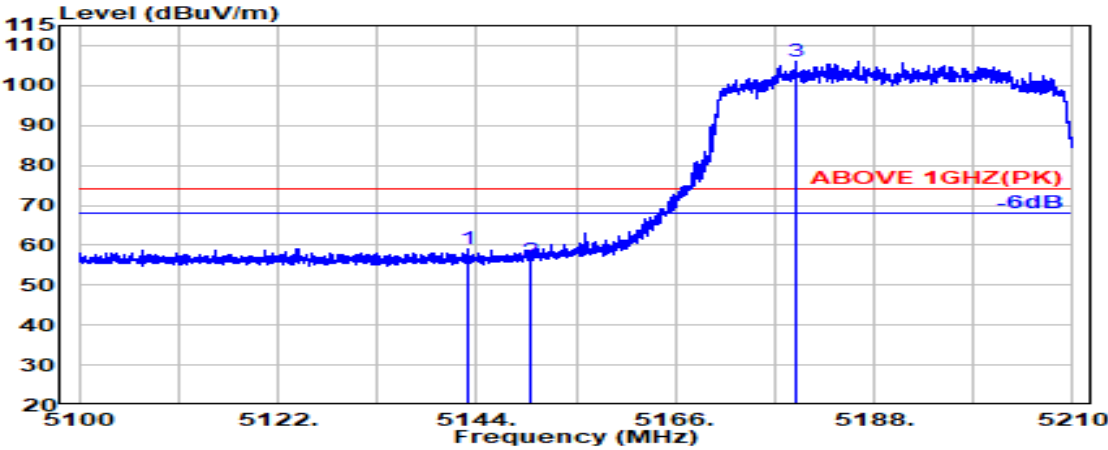

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.963	33.70	8.54	34.34	51.18	59.08	74.00	14.92	Peak
5150.000	33.70	8.54	34.34	48.39	56.30	74.00	17.70	Peak
@ 5179.326	33.70	8.56	34.33	98.20	106.13	---	---	Peak

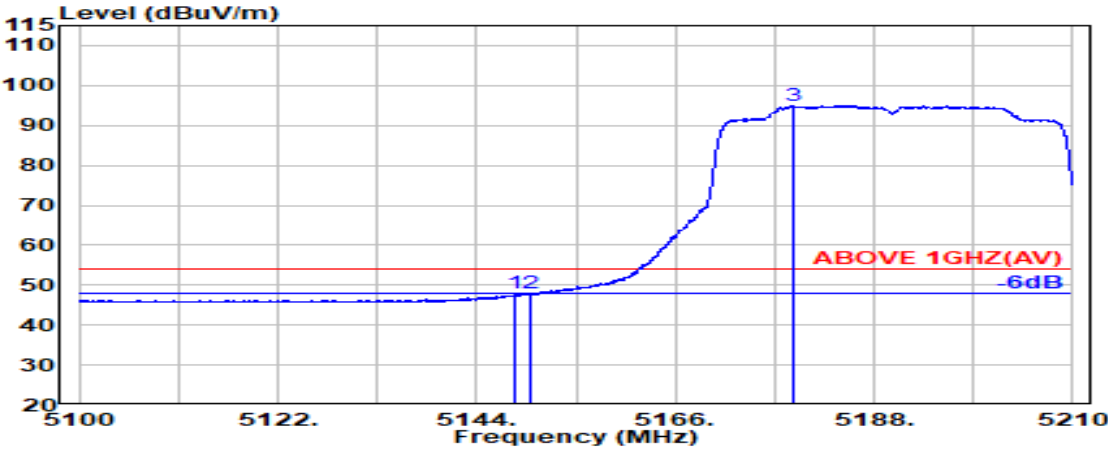


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.369	33.70	8.54	34.34	39.94	47.85	54.00	6.15	Average
5150.000	33.70	8.54	34.34	39.90	47.81	54.00	6.19	Average
@ 5179.043	33.70	8.56	34.33	87.06	94.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

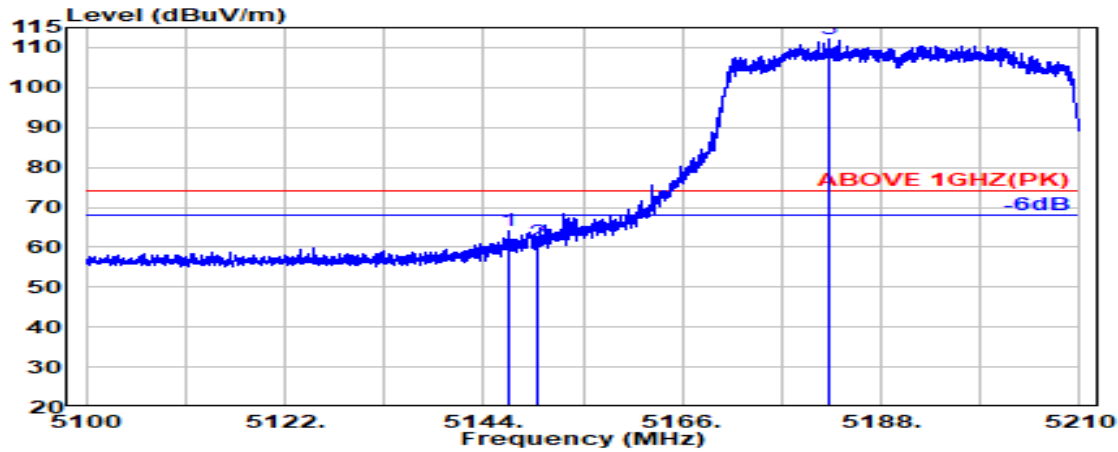

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.892	33.70	8.54	34.34	56.03	63.94	74.00	10.06	Peak
5150.000	33.70	8.54	34.34	53.16	61.07	74.00	12.93	Peak
@ 5182.154	33.70	8.56	34.32	104.27	112.21	---	---	Peak

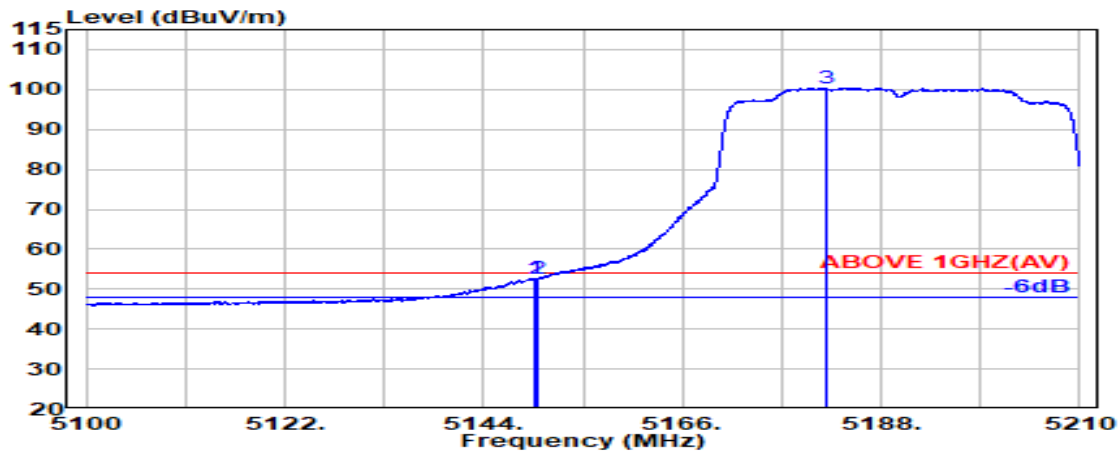


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.688	33.70	8.54	34.34	44.59	52.49	54.00	1.51	Average
5150.000	33.70	8.54	34.34	44.54	52.45	54.00	1.55	Average
@ 5181.934	33.70	8.56	34.33	92.45	100.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

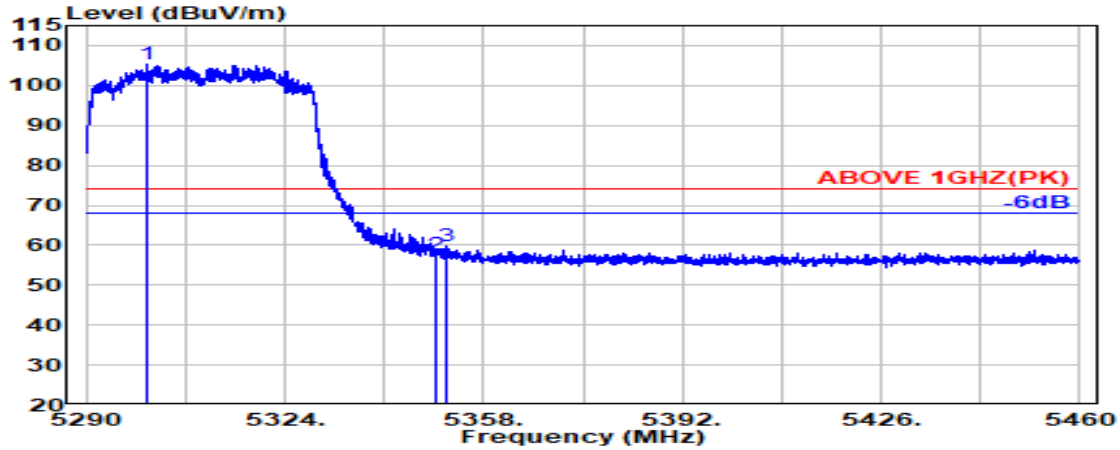

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5300.297	34.10	8.64	34.28	96.94	105.40	---	---	Peak
5350.000	33.90	8.67	34.26	49.36	57.67	74.00	16.33	Peak
5351.637	33.91	8.67	34.26	51.37	59.69	74.00	14.31	Peak

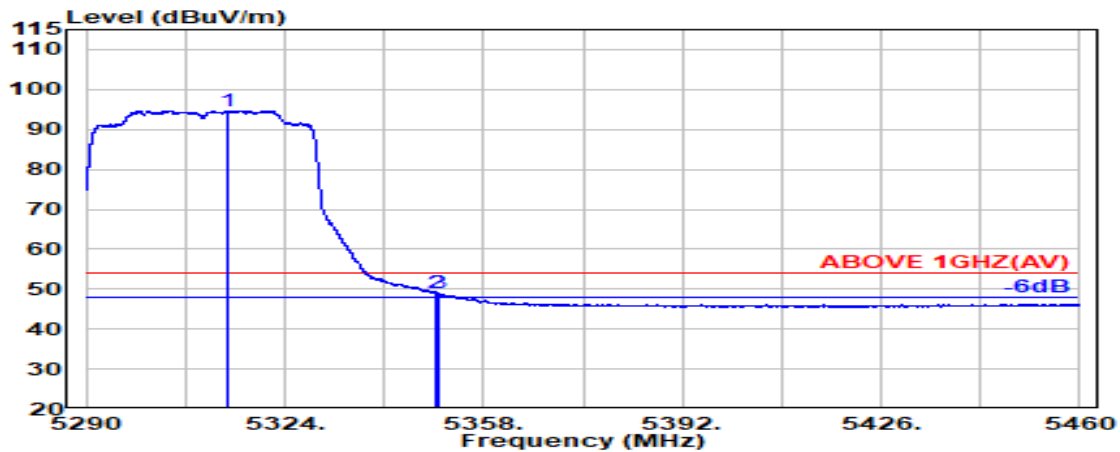


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5314.043	34.04	8.64	34.27	86.31	94.73	---	---	Average
5350.000	33.90	8.67	34.26	40.69	48.99	54.00	5.01	Average
5350.375	33.90	8.67	34.26	40.70	49.01	54.00	4.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

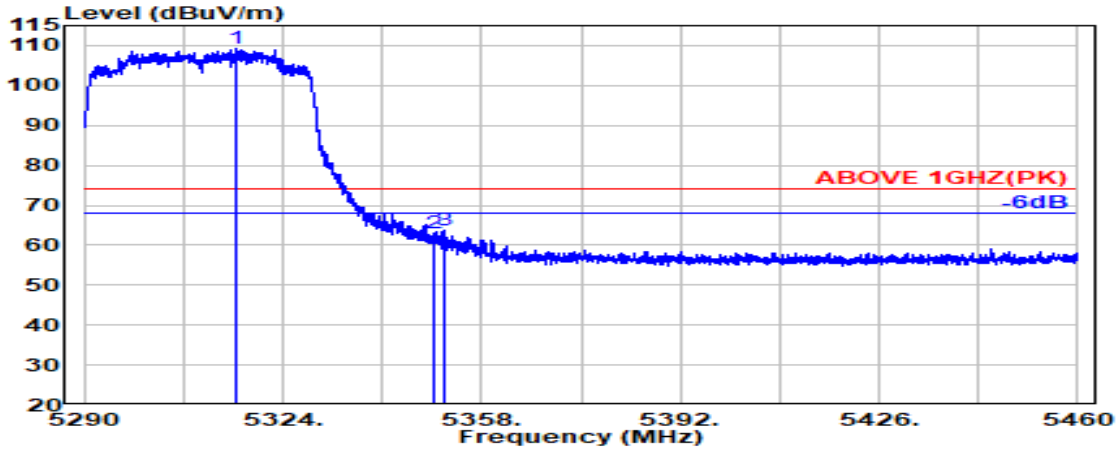

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.937	34.04	8.64	34.27	100.75	109.16	---	---	Peak
5350.000	33.90	8.67	34.26	54.54	62.84	74.00	11.16	Peak
5351.443	33.91	8.67	34.26	55.45	63.76	74.00	10.24	Peak

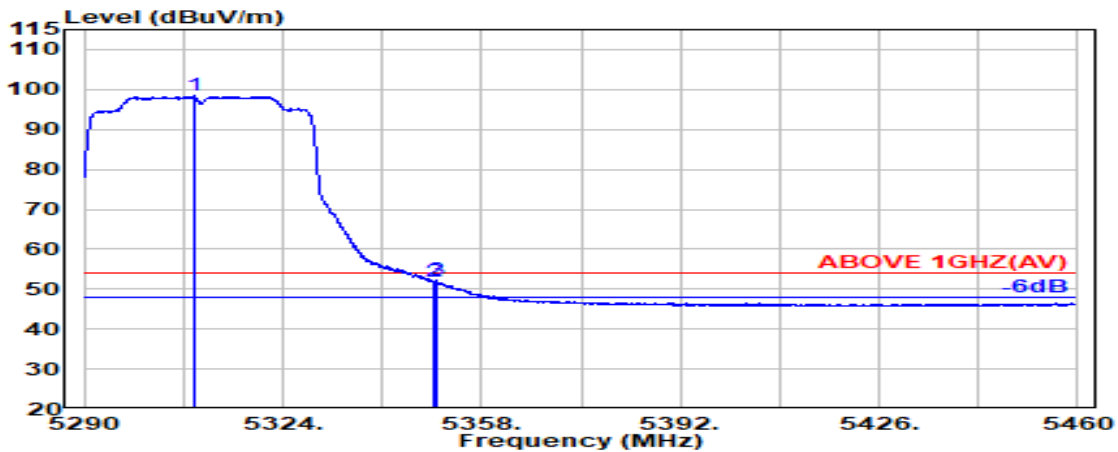


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.894	34.06	8.64	34.27	89.90	98.33	---	---	Average
5350.000	33.90	8.67	34.26	43.67	51.98	54.00	2.02	Average
5350.375	33.90	8.67	34.26	43.80	52.11	54.00	1.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

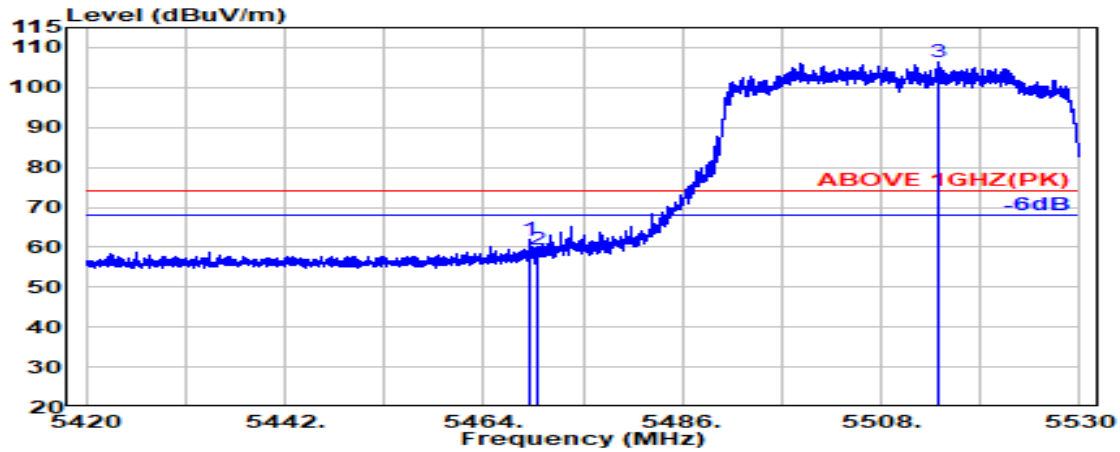

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.997	34.16	8.74	34.21	53.30	61.99	74.00	12.01	Peak
5470.000	34.16	8.74	34.21	50.85	59.53	74.00	14.47	Peak
@ 5514.349	34.10	8.76	34.21	97.70	106.35	---	---	Peak

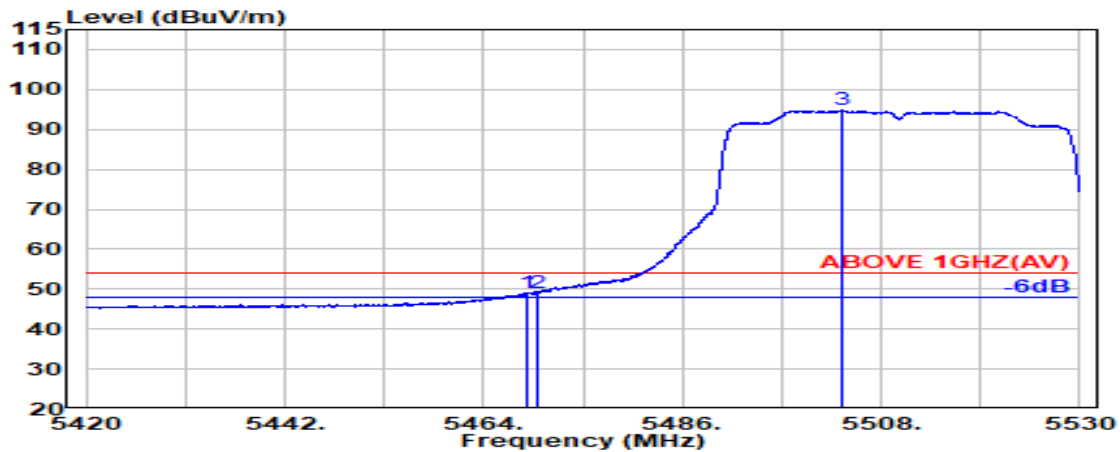


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.809	34.16	8.74	34.21	40.49	49.18	54.00	4.82	Average
5470.000	34.16	8.74	34.21	40.50	49.18	54.00	4.82	Average
@ 5503.663	34.10	8.76	34.20	86.09	94.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

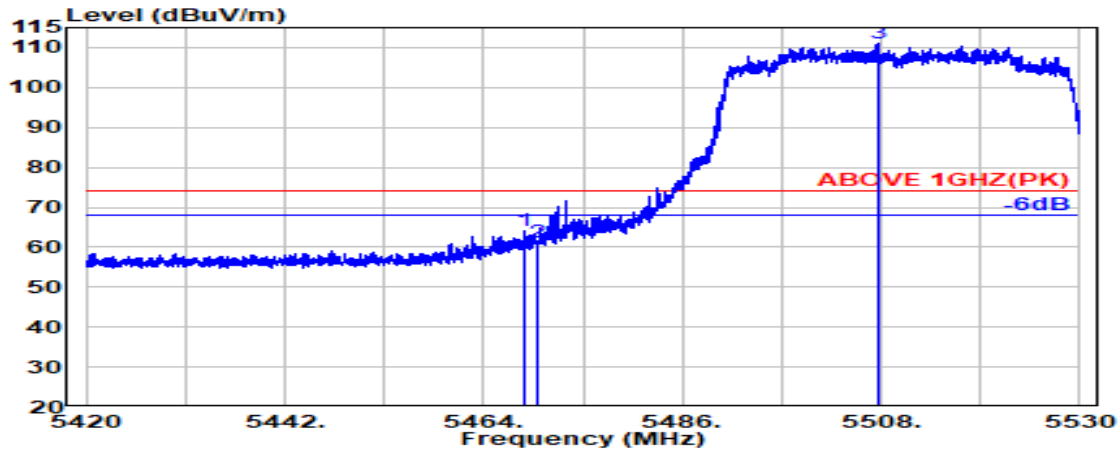

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.588	34.16	8.73	34.21	55.36	64.04	74.00	9.96	Peak
5470.000	34.16	8.74	34.21	52.70	61.38	74.00	12.62	Peak
@ 5507.654	34.10	8.76	34.20	102.29	110.94	---	---	Peak

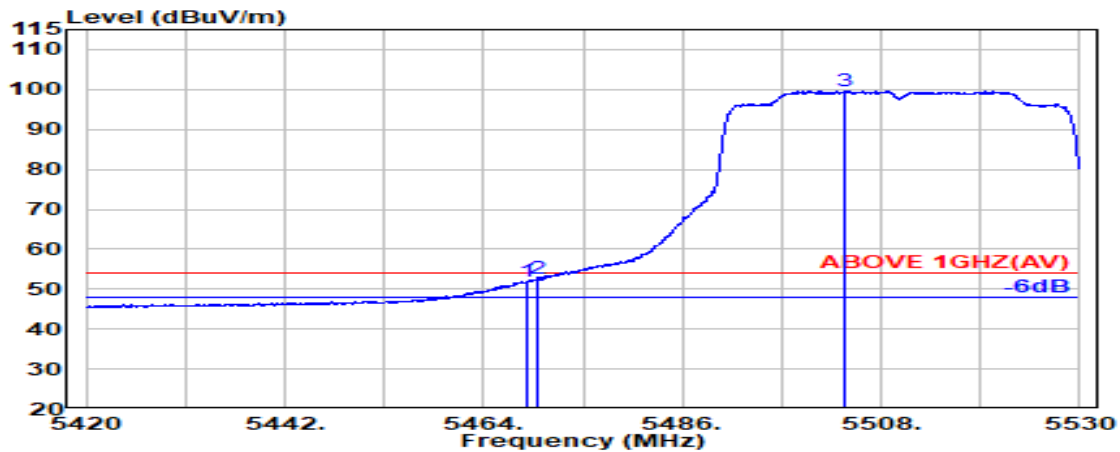


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.934	34.16	8.74	34.21	43.21	51.90	54.00	2.10	Average
5470.000	34.16	8.74	34.21	43.80	52.49	54.00	1.51	Average
@ 5503.946	34.10	8.76	34.20	91.08	99.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

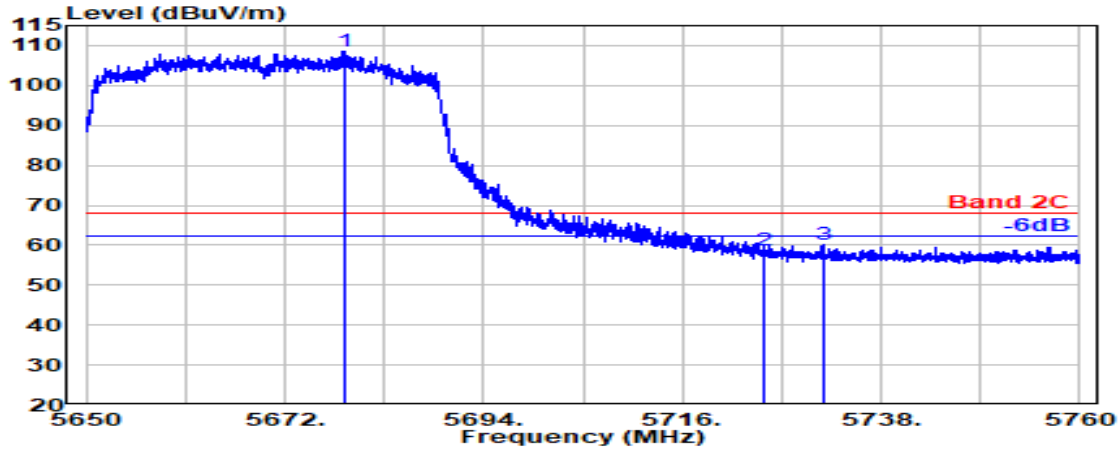

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5678.631	33.89	8.85	34.28	100.01	108.47	---	---	Peak
5725.000	33.80	8.88	34.31	50.50	58.88	68.20	9.32	Peak
5731.526	33.80	8.88	34.31	51.76	60.13	68.20	8.07	Peak

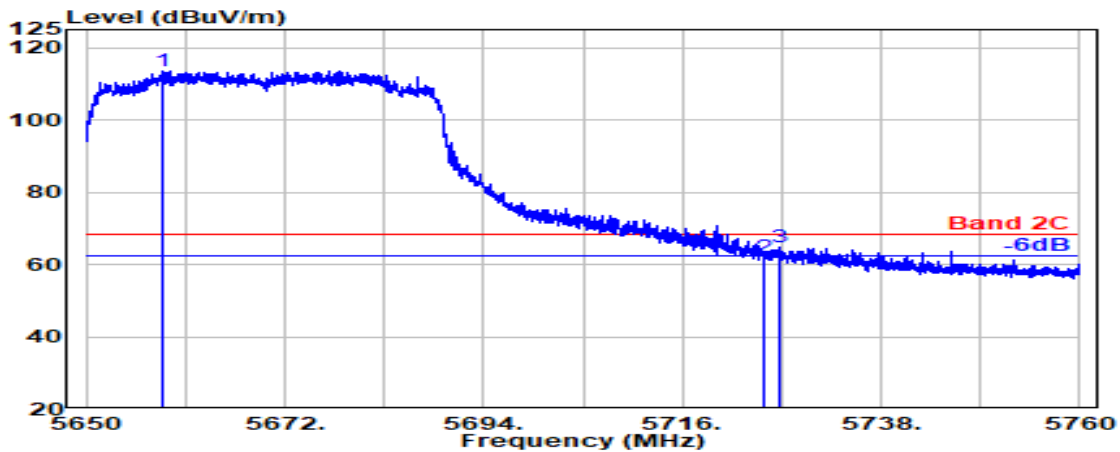


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5658.360	33.97	8.84	34.28	104.99	113.52	---	---	Peak
5725.000	33.80	8.88	34.31	53.70	62.08	68.20	6.12	Peak
5726.749	33.80	8.88	34.31	56.31	64.69	68.20	3.51	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

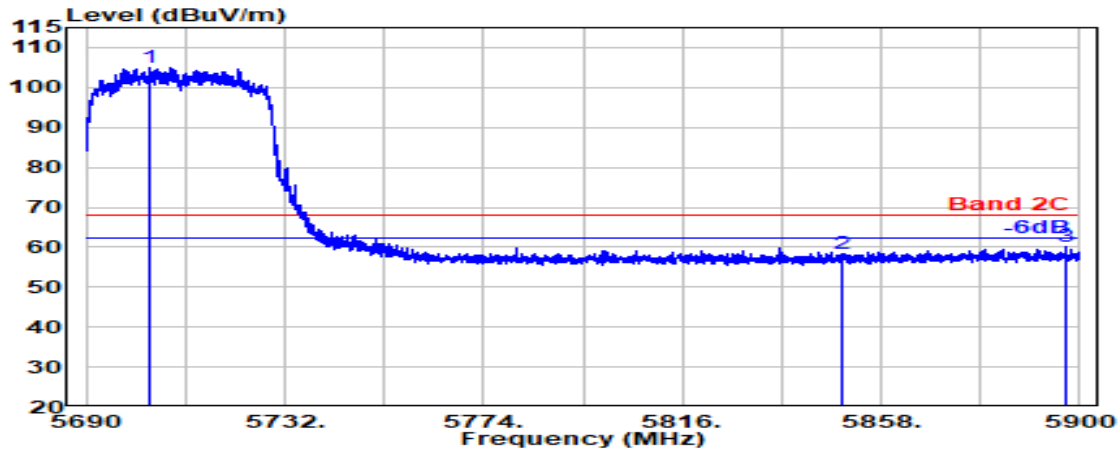

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.500	33.80	8.87	34.30	96.65	105.02	---	---	Peak
5850.000	34.10	8.95	34.36	49.53	58.22	68.20	9.98	Peak
5897.000	34.10	8.97	34.38	51.37	60.06	68.20	8.14	Peak

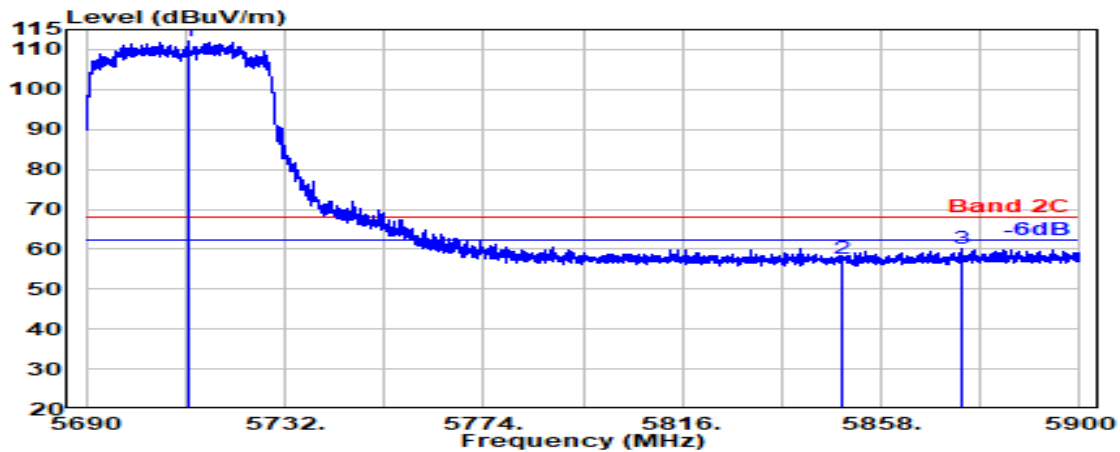


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.660	33.80	8.87	34.30	103.68	112.06	---	---	Peak
5850.000	34.10	8.95	34.36	48.87	57.56	68.20	10.64	Peak
5875.220	34.10	8.96	34.37	51.36	60.05	68.20	8.15	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

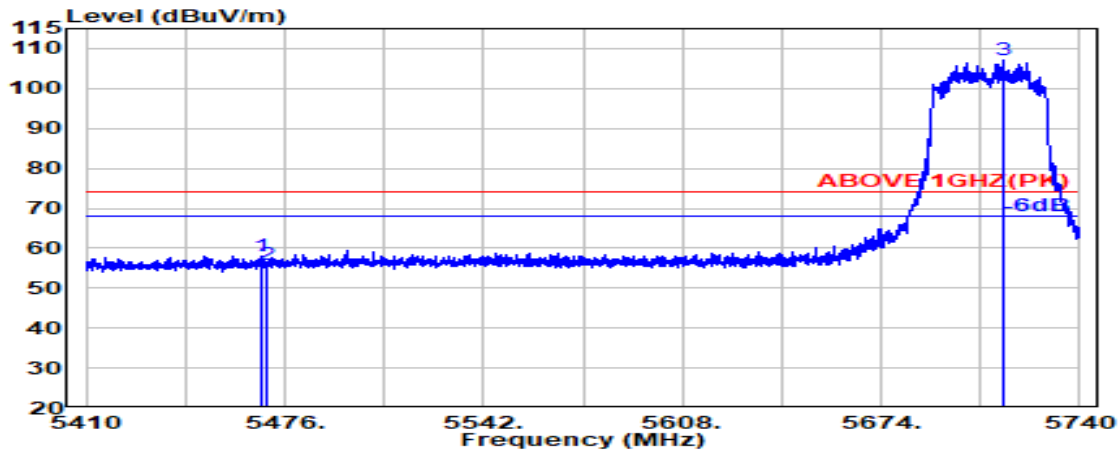

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.457	34.16	8.73	34.21	49.33	58.02	74.00	15.98	Peak
5470.000	34.16	8.74	34.21	47.06	55.74	74.00	18.26	Peak
@ 5714.354	33.80	8.87	34.30	98.62	106.99	---	---	Peak

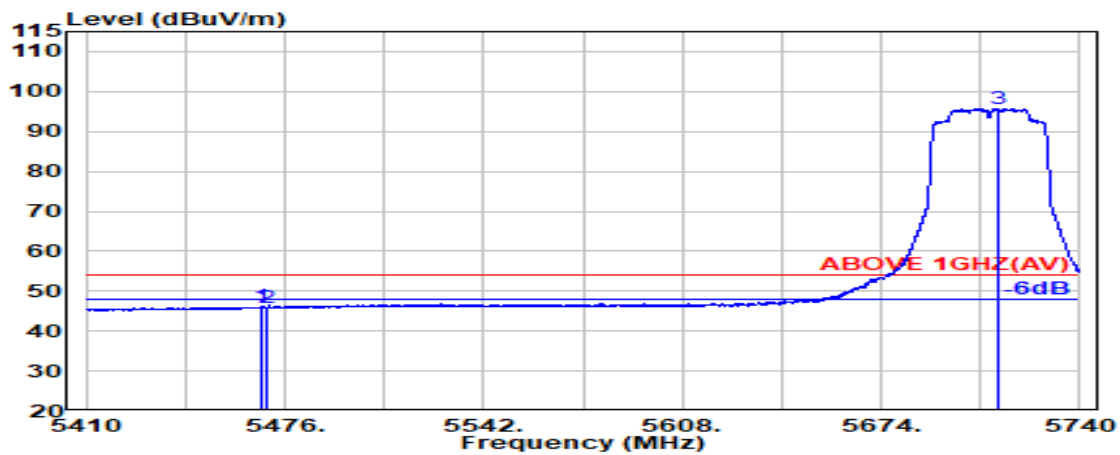


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.986	34.16	8.73	34.21	37.31	46.00	54.00	8.00	Peak
5470.000	34.16	8.74	34.21	37.17	45.85	54.00	8.15	Peak
@ 5712.751	33.80	8.87	34.30	87.37	95.75	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

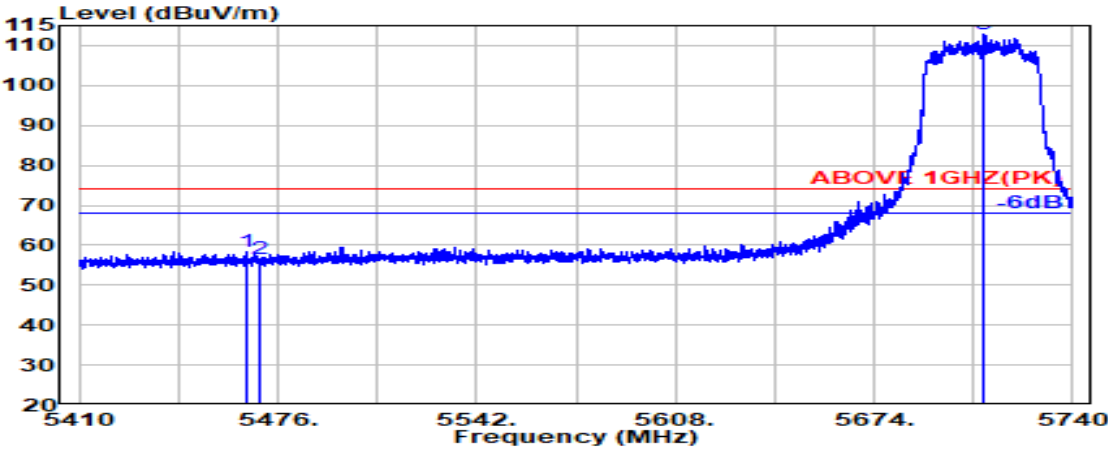

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.817	34.17	8.73	34.21	49.64	58.33	74.00	15.67	Peak
5470.000	34.16	8.74	34.21	47.92	56.61	74.00	17.39	Peak
@ 5710.677	33.80	8.87	34.30	104.38	112.75	---	---	Peak

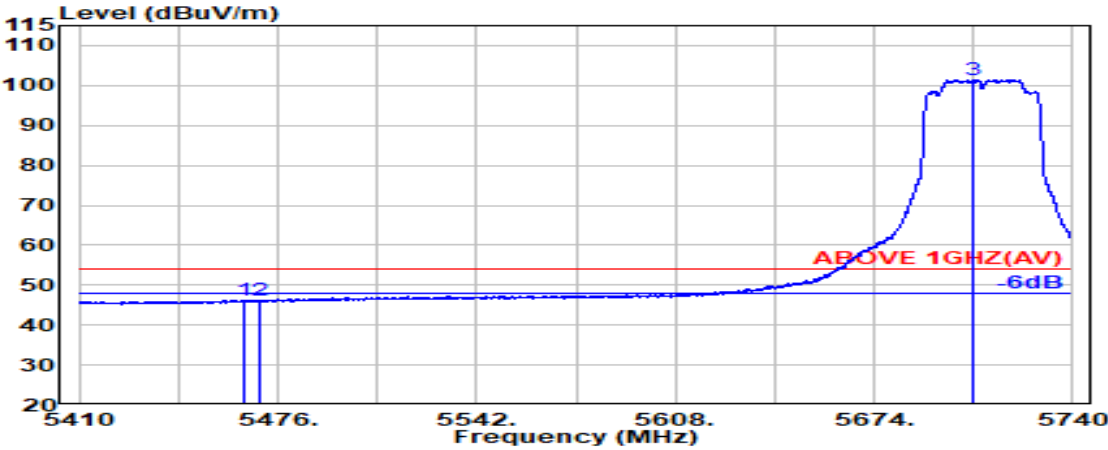


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.063	34.17	8.73	34.21	37.41	46.10	54.00	7.90	Peak
5470.000	34.16	8.74	34.21	37.49	46.17	54.00	7.83	Peak
@ 5706.812	33.80	8.87	34.30	93.10	101.47	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

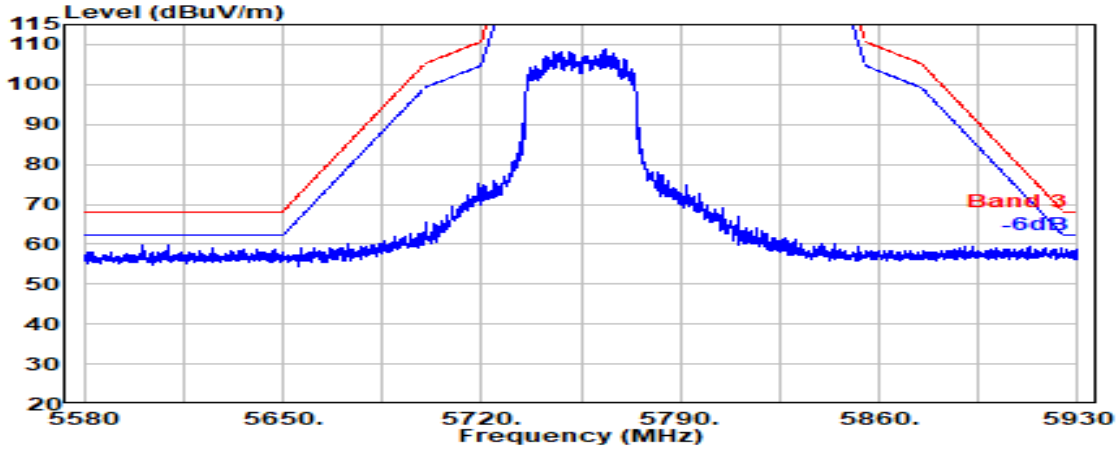


Antenna at Vertical Polarization

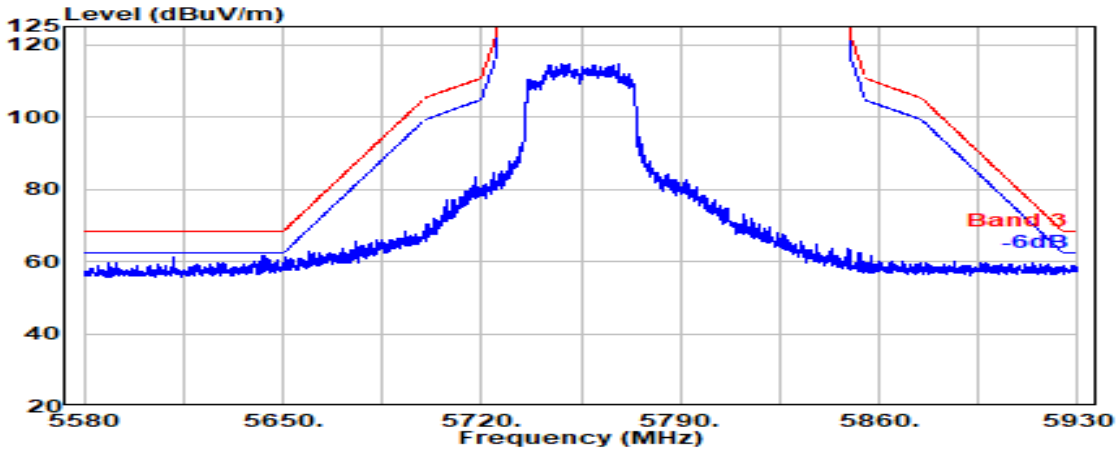


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


## Antenna at Horizontal Polarization

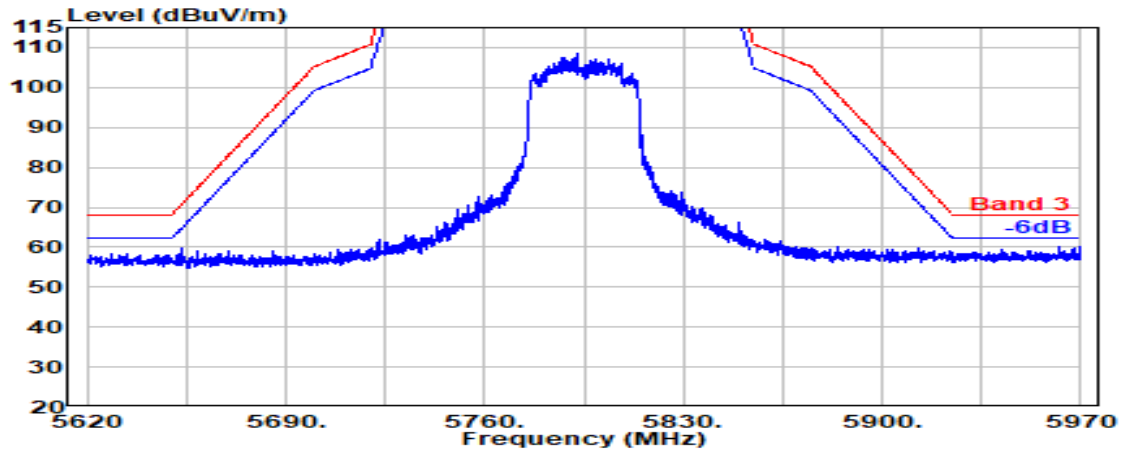

## Antenna at Vertical Polarization

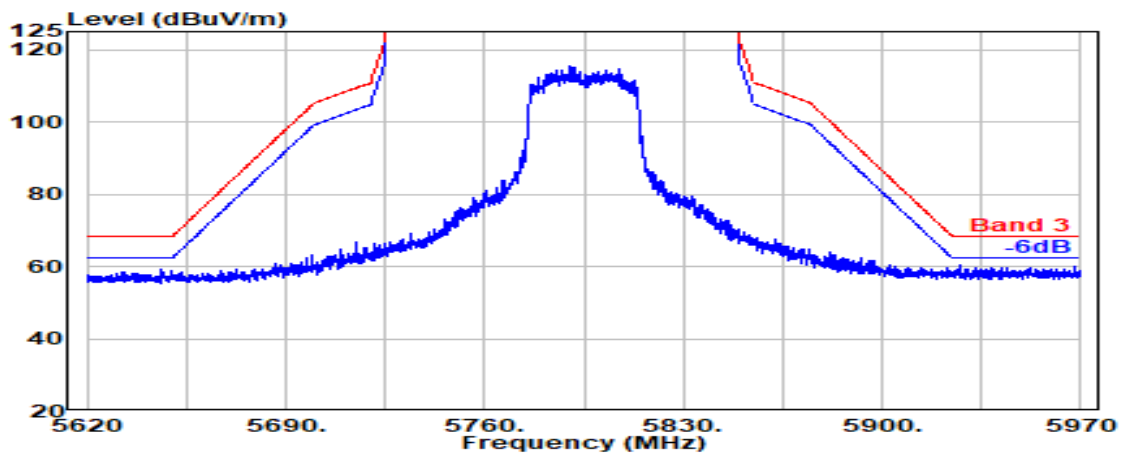


Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

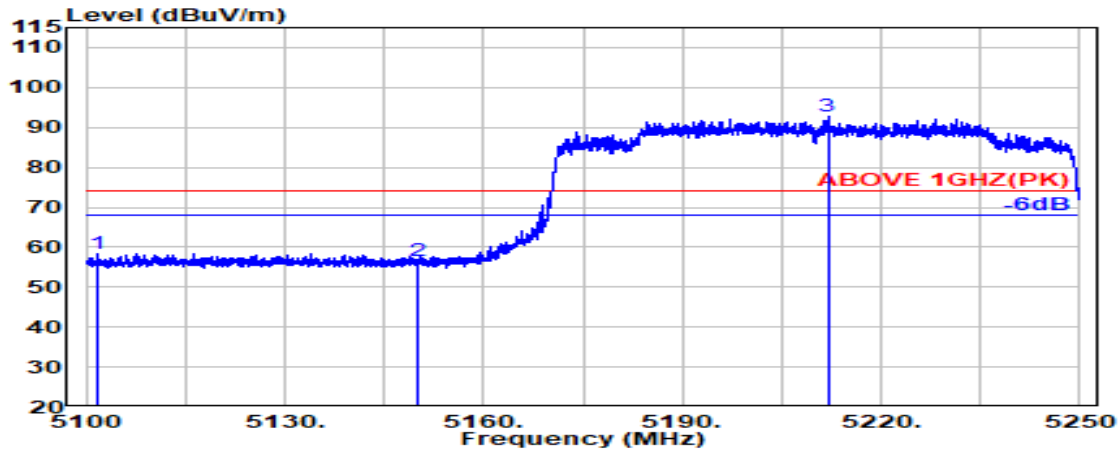

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.800	33.70	8.51	34.36	50.66	58.51	74.00	15.49	Peak
5150.000	33.70	8.54	34.34	48.53	56.43	74.00	17.57	Peak
@ 5211.943	33.72	8.58	34.31	84.66	92.65	---	---	Peak

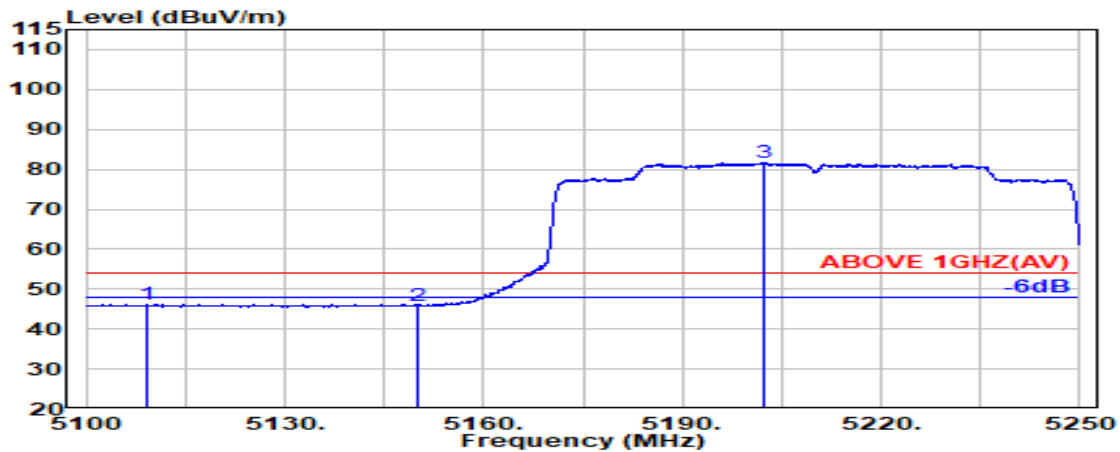


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.086	33.70	8.52	34.35	38.31	46.17	54.00	7.83	Average
5150.000	33.70	8.54	34.34	37.92	45.82	54.00	8.18	Average
@ 5202.257	33.70	8.58	34.32	73.63	81.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

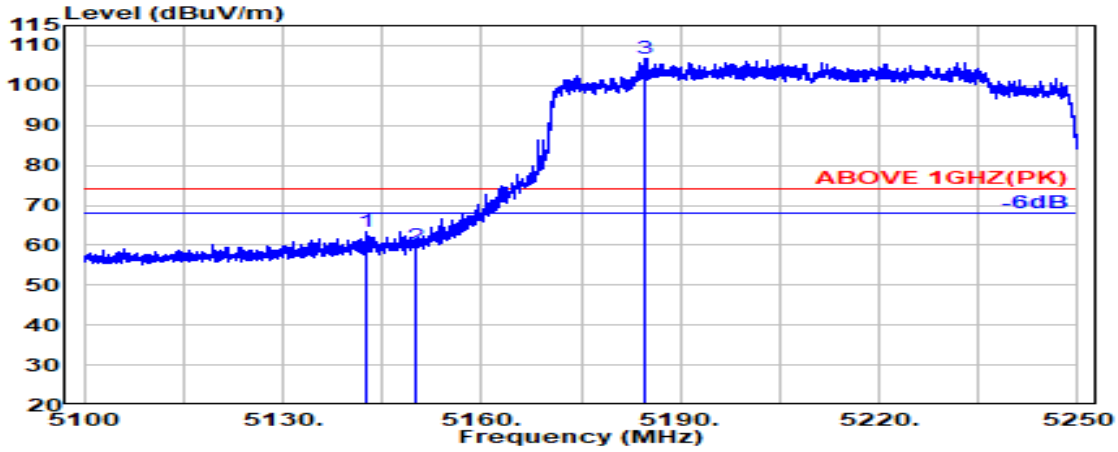

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.729	33.70	8.54	34.34	55.44	63.34	74.00	10.66	Peak
5150.000	33.70	8.54	34.34	52.03	59.94	74.00	14.06	Peak
@ 5184.814	33.70	8.57	34.32	98.70	106.64	---	---	Peak

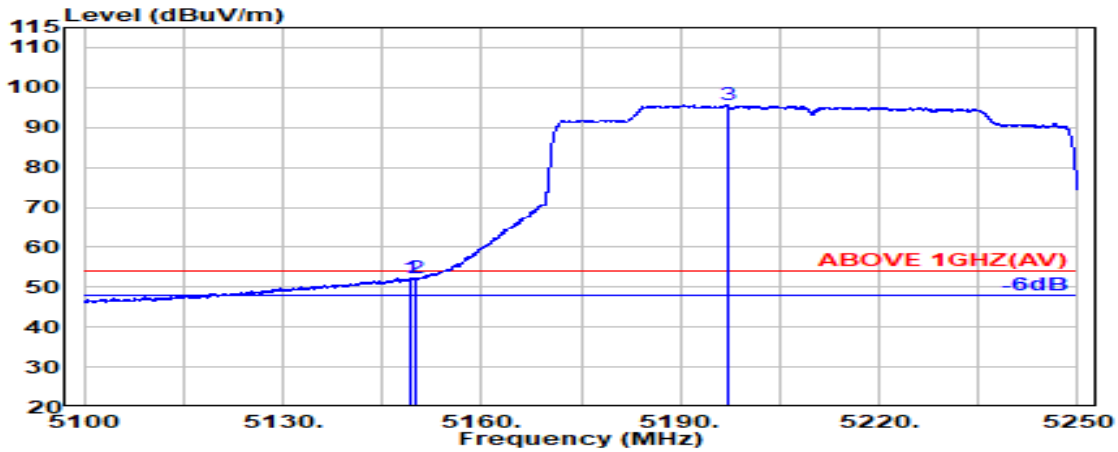


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.286	33.70	8.54	34.34	44.43	52.33	54.00	1.67	Average
5150.000	33.70	8.54	34.34	44.30	52.21	54.00	1.79	Average
@ 5197.114	33.70	8.57	34.32	87.63	95.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

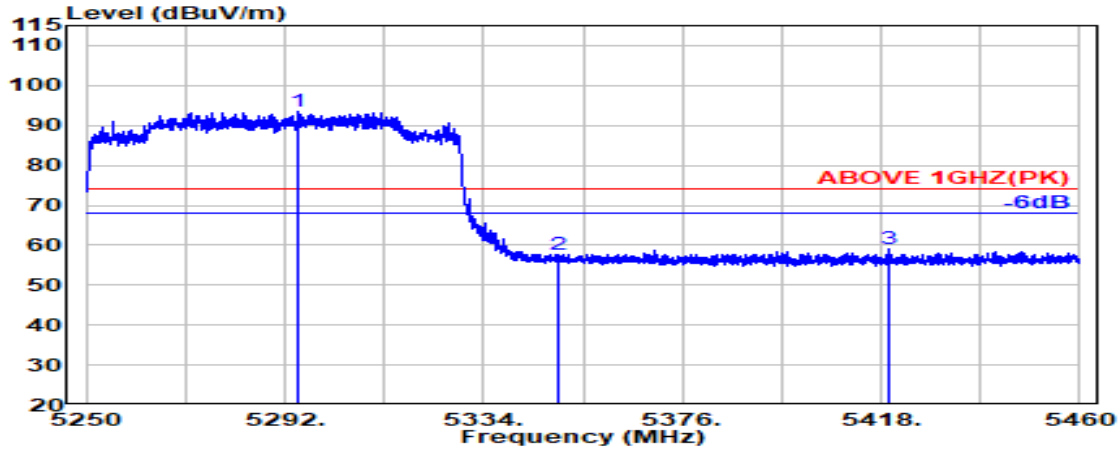

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.760	34.07	8.63	34.28	85.23	93.66	---	---	Peak
5350.000	33.90	8.67	34.26	49.28	57.58	74.00	16.42	Peak
5419.500	34.14	8.71	34.23	50.34	58.96	74.00	15.04	Peak

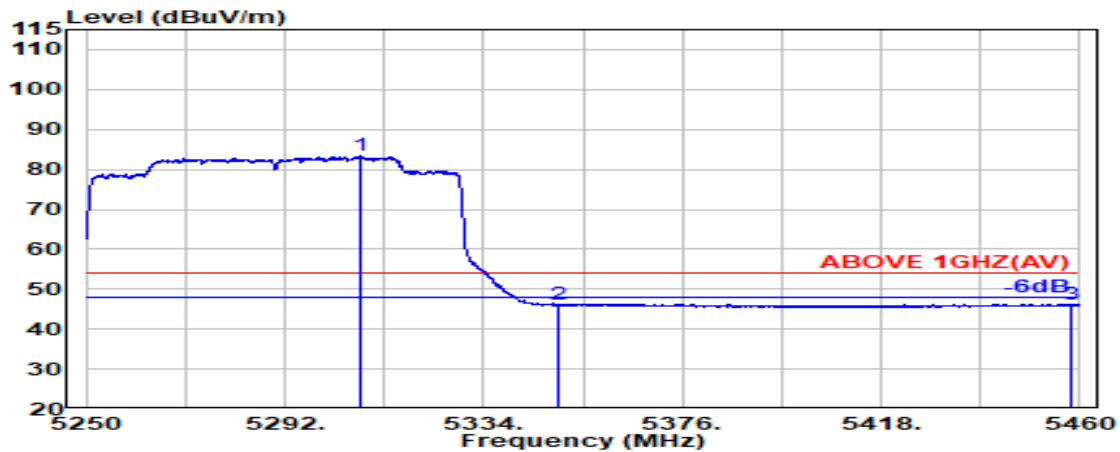


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.960	34.07	8.64	34.27	74.89	83.33	---	---	Average
5350.000	33.90	8.67	34.26	37.74	46.05	54.00	7.95	Average
5458.320	34.18	8.73	34.22	37.62	46.32	54.00	7.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

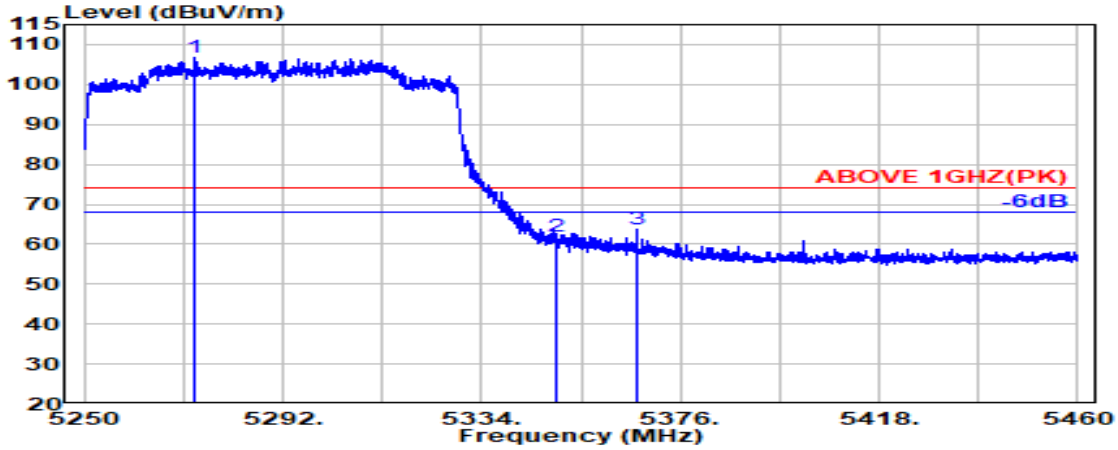

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5273.460	33.94	8.62	34.29	98.50	106.77	---	---	Peak
5350.000	33.90	8.67	34.26	53.67	61.98	74.00	12.02	Peak
5366.700	33.97	8.68	34.25	55.24	63.63	74.00	10.37	Peak

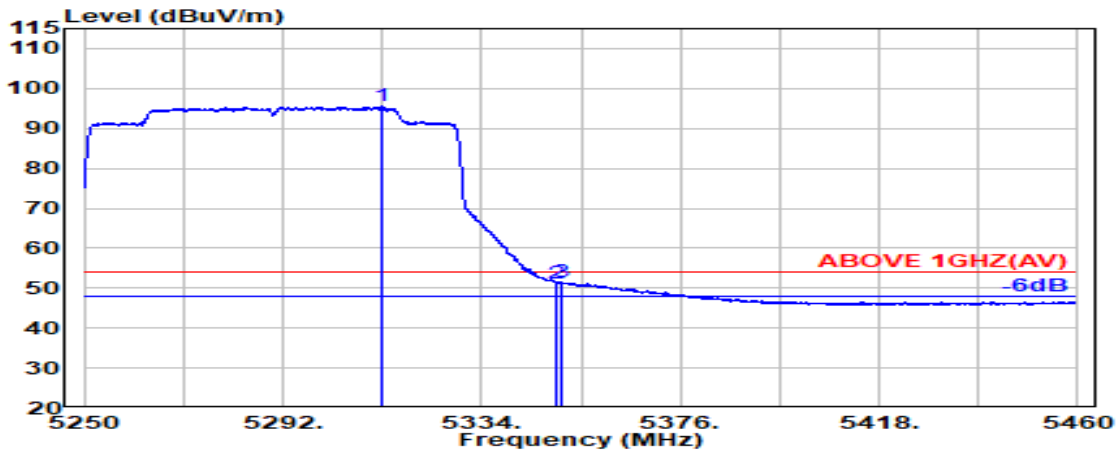


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.180	34.05	8.64	34.27	87.06	95.48	---	---	Average
5350.000	33.90	8.67	34.26	42.94	51.25	54.00	2.75	Average
5350.860	33.90	8.67	34.26	43.16	51.47	54.00	2.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

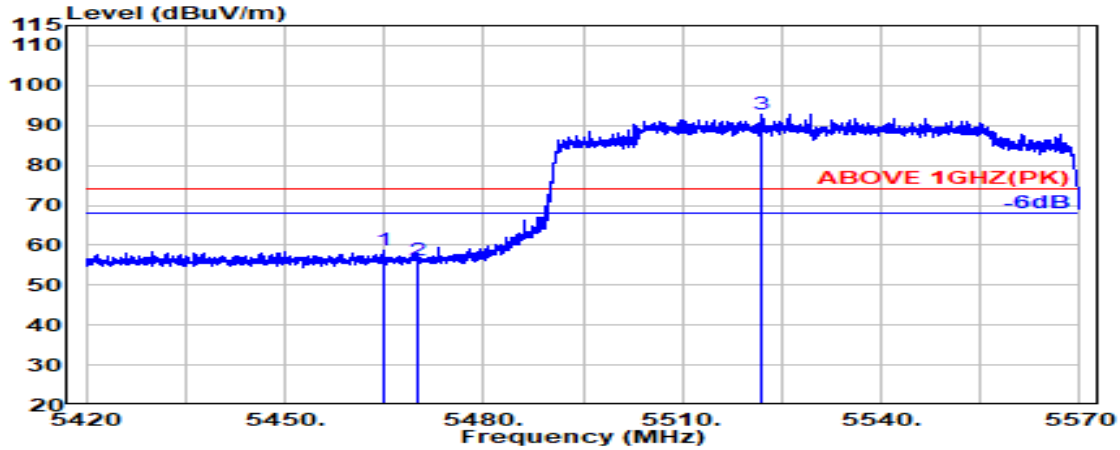

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5464.957	34.17	8.73	34.21	49.86	58.55	74.00	15.45	Peak
5470.000	34.16	8.74	34.21	47.51	56.19	74.00	17.81	Peak
@ 5522.086	34.10	8.77	34.21	84.12	92.78	---	---	Peak

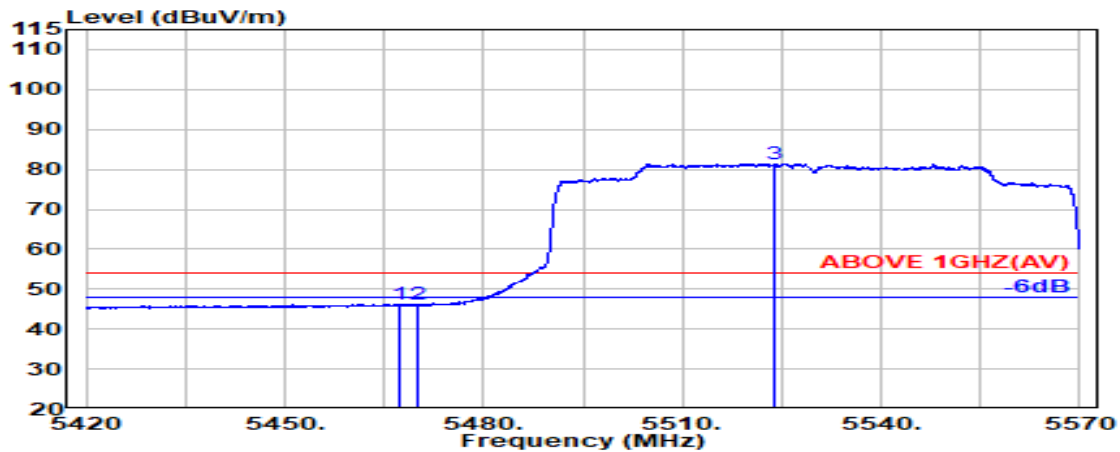


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.314	34.17	8.73	34.21	37.60	46.29	54.00	7.71	Average
5470.000	34.16	8.74	34.21	37.32	46.00	54.00	8.00	Average
@ 5524.014	34.10	8.77	34.21	72.79	81.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

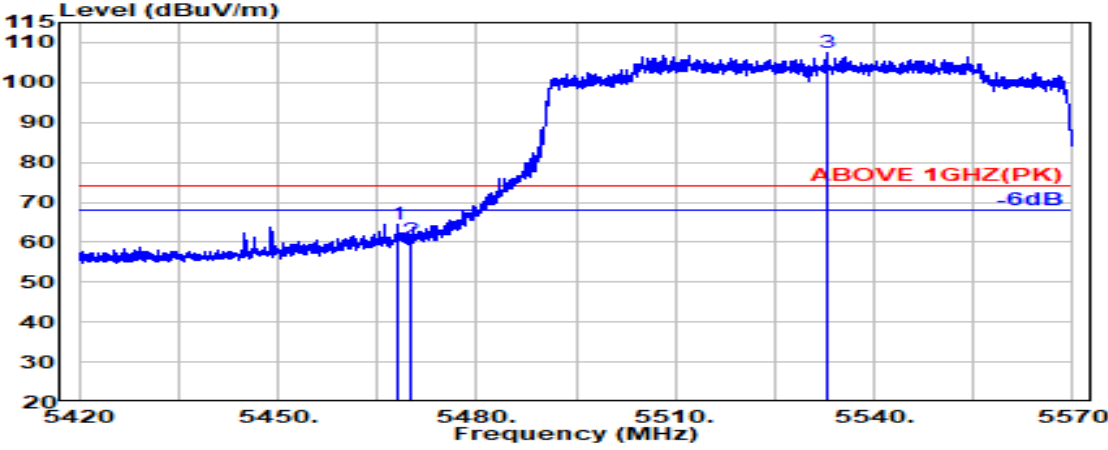

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.043	34.16	8.73	34.21	55.82	64.50	74.00	9.50	Peak
5470.000	34.16	8.74	34.21	51.73	60.42	74.00	13.58	Peak
@ 5532.800	34.10	8.77	34.22	98.69	107.35	---	---	Peak

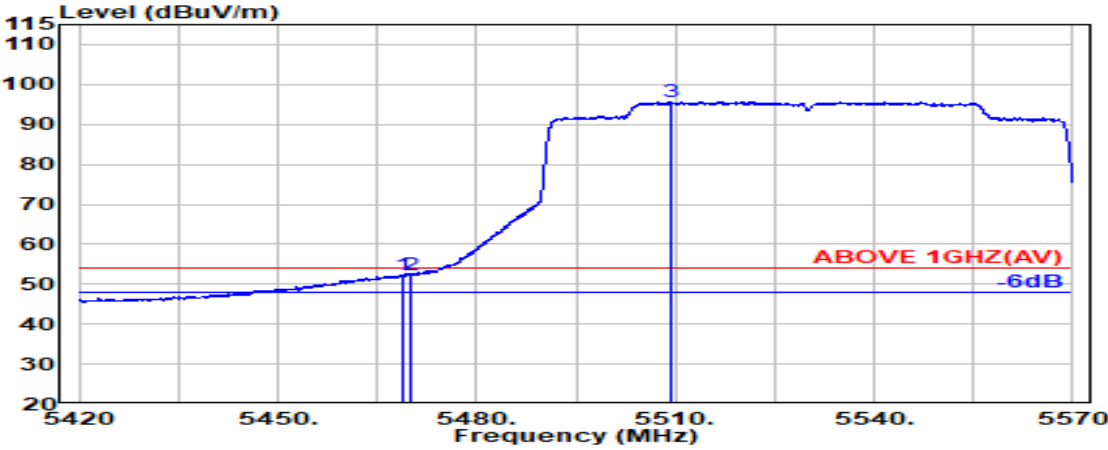


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.857	34.16	8.74	34.21	43.43	52.11	54.00	1.89	Average
5470.000	34.16	8.74	34.21	43.62	52.31	54.00	1.69	Average
@ 5509.229	34.10	8.76	34.20	87.10	95.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

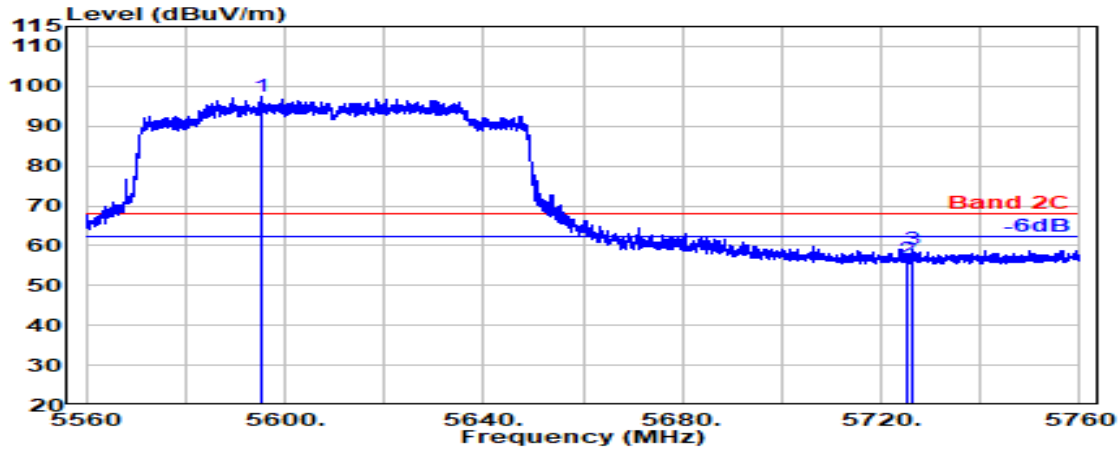

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.086	34.01	8.81	34.25	88.71	97.28	---	---	Peak
5725.000	33.80	8.88	34.31	48.08	56.46	68.20	11.74	Peak
5726.171	33.80	8.88	34.31	50.56	58.94	68.20	9.26	Peak

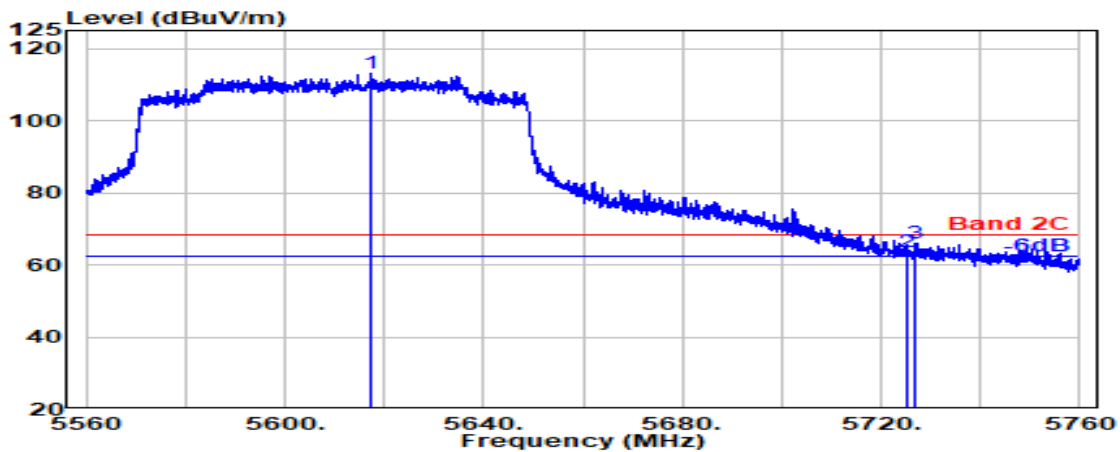


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5617.372	34.00	8.82	34.26	104.37	112.94	---	---	Peak
5725.000	33.80	8.88	34.31	55.19	63.56	68.20	4.64	Peak
5727.029	33.80	8.88	34.31	57.58	65.96	68.20	2.24	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

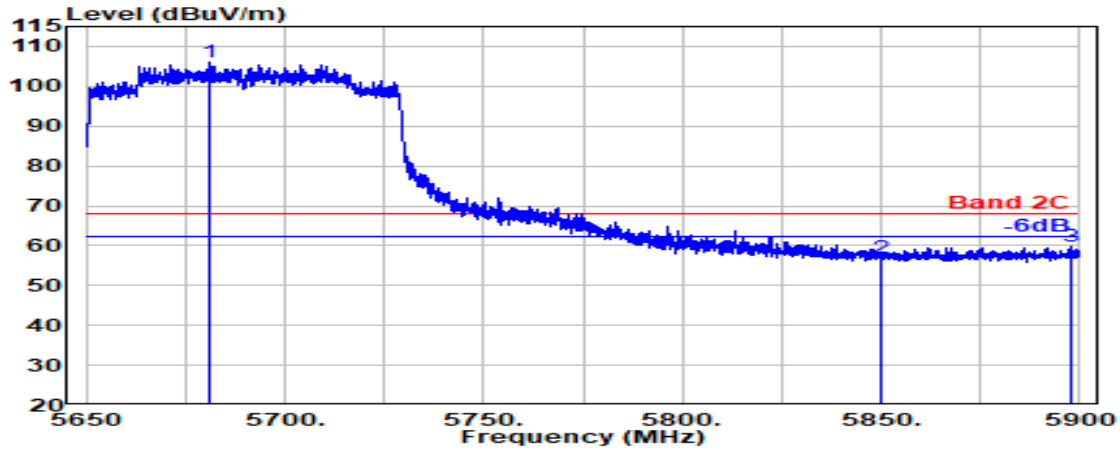

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.214	33.87	8.86	34.29	97.72	106.17	---	---	Peak
5850.000	34.10	8.95	34.36	48.29	56.98	68.20	11.22	Peak
5898.000	34.10	8.98	34.38	50.94	59.64	68.20	8.56	Peak

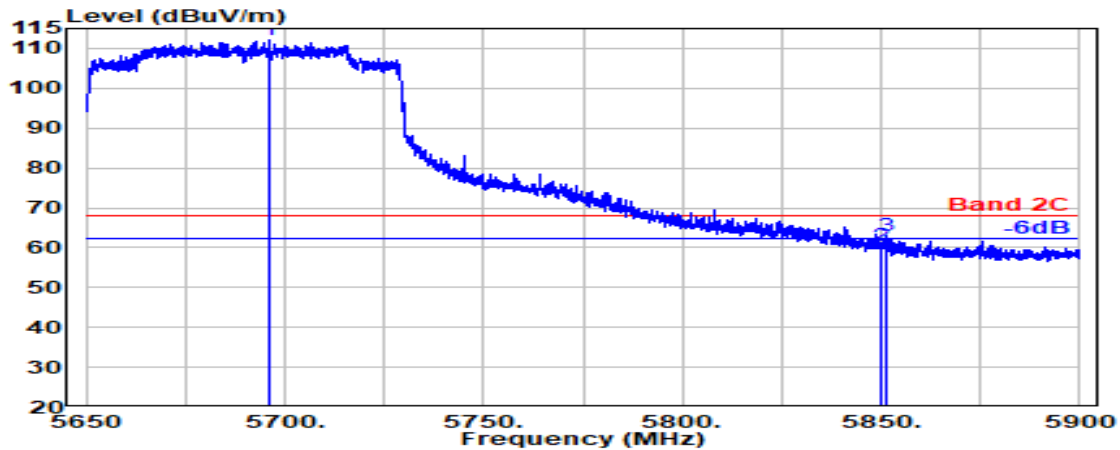


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.143	33.82	8.86	34.29	103.65	112.04	---	---	Peak
5850.000	34.10	8.95	34.36	51.90	60.58	68.20	7.62	Peak
5851.214	34.10	8.95	34.36	54.47	63.15	68.20	5.05	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

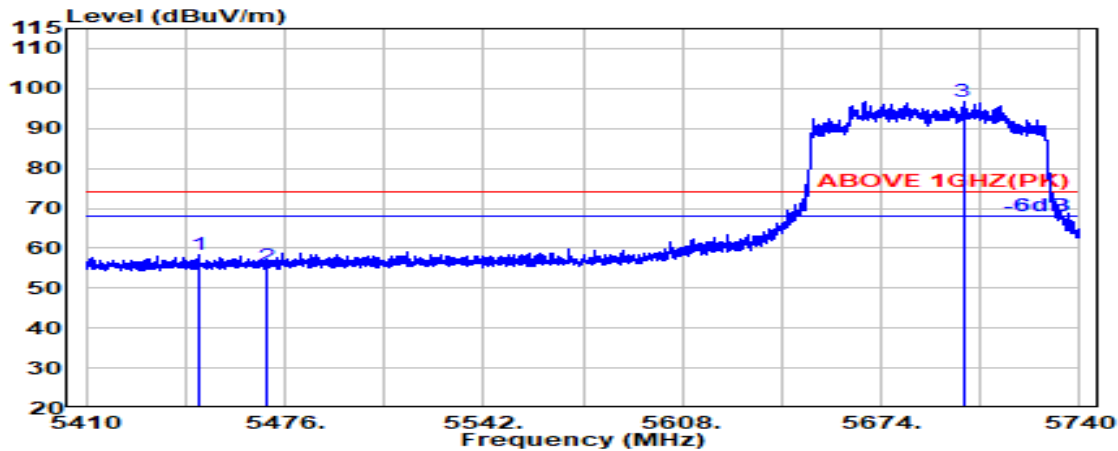

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.714	34.20	8.72	34.22	49.59	58.29	74.00	15.71	Peak
5470.000	34.16	8.74	34.21	46.87	55.55	74.00	18.45	Peak
@ 5701.249	33.80	8.87	34.29	88.43	96.80	---	---	Peak

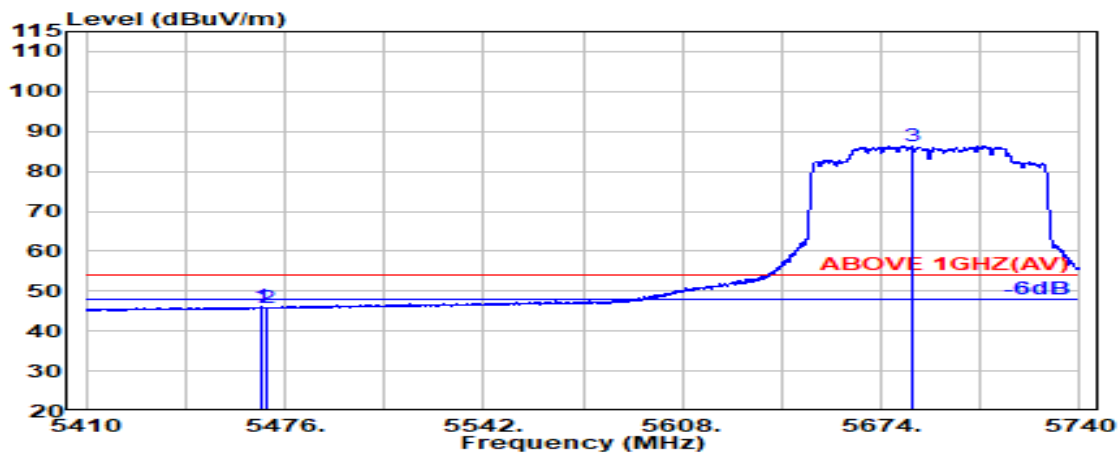


#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.457	34.16	8.73	34.21	37.33	46.01	74.00	27.99	Peak
5470.000	34.16	8.74	34.21	37.17	45.86	74.00	28.14	Peak
@ 5684.277	33.86	8.86	34.29	77.95	86.38	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

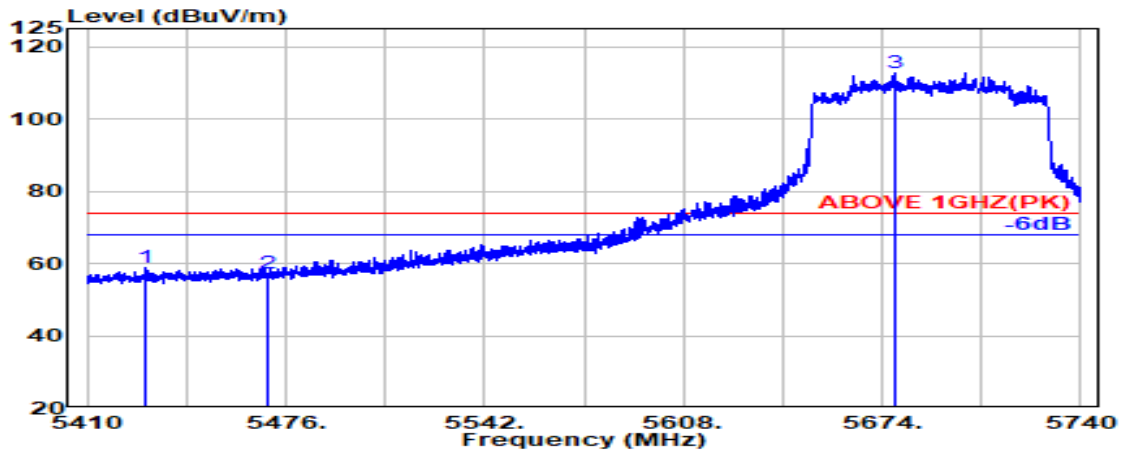

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.234	34.16	8.71	34.23	50.21	58.85	74.00	15.15	Peak
5470.000	34.16	8.74	34.21	48.47	57.15	74.00	16.85	Peak
@ 5677.960	33.89	8.85	34.28	104.35	112.81	---	---	Peak

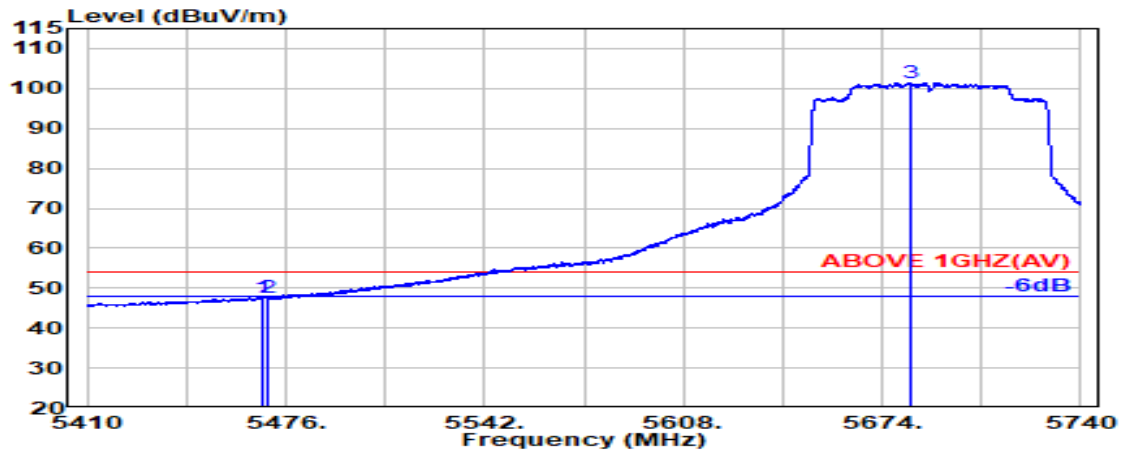


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.457	34.16	8.73	34.21	38.88	47.57	54.00	6.43	Average
5470.000	34.16	8.74	34.21	38.85	47.53	54.00	6.47	Average
@ 5683.146	33.87	8.86	34.29	92.91	101.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


## Antenna at Horizontal Polarization

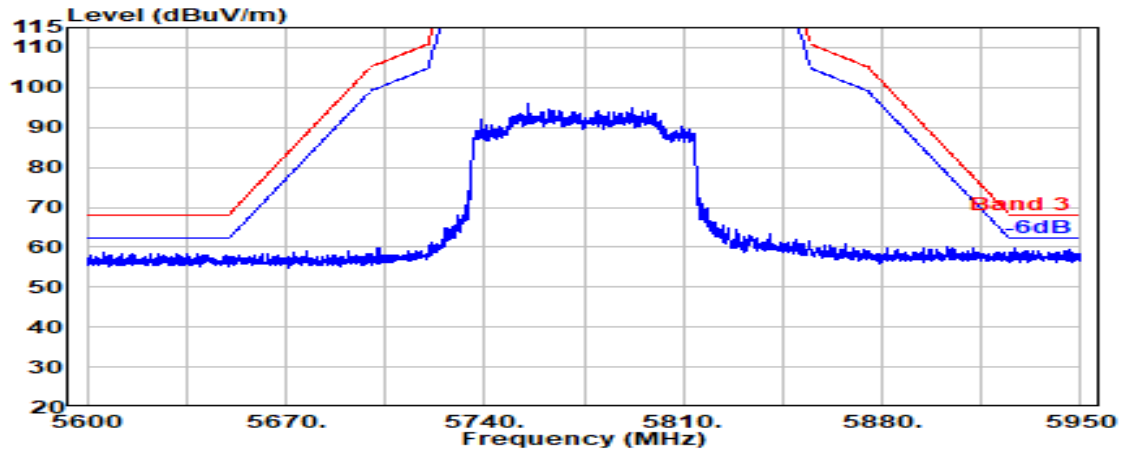

## Antenna at Vertical Polarization

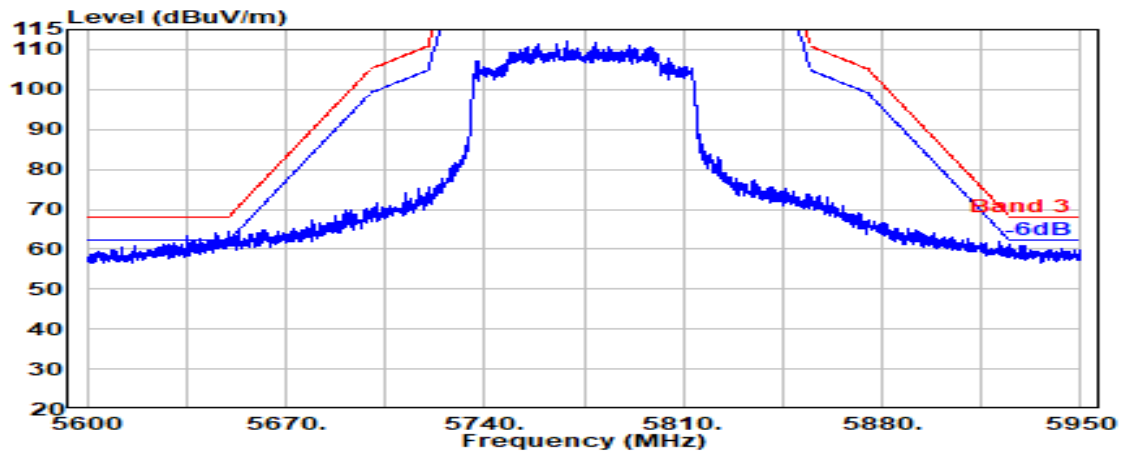


Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

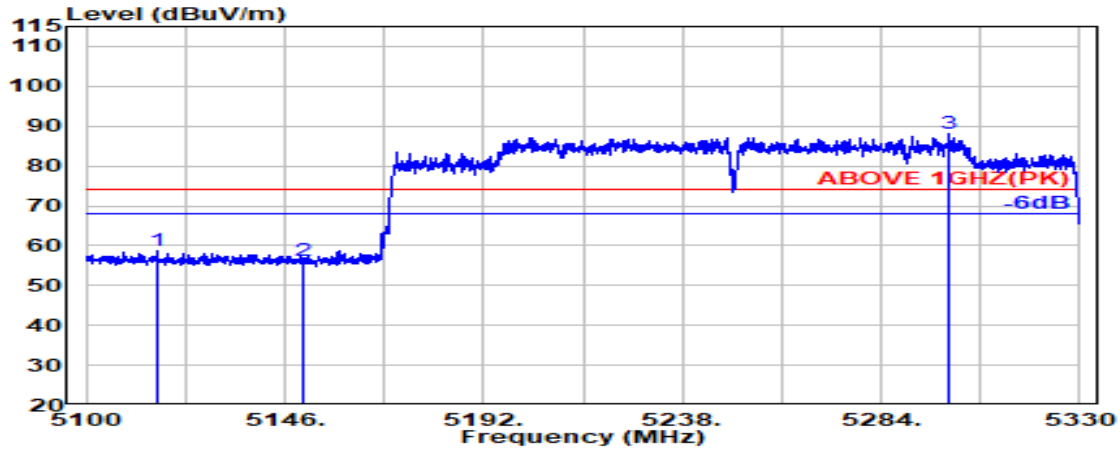

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.600	33.70	8.52	34.35	50.90	58.77	74.00	15.23	Peak
5150.000	33.70	8.54	34.34	48.29	56.19	74.00	17.81	Peak
@ 5299.800	34.10	8.64	34.28	79.57	88.03	---	---	Peak

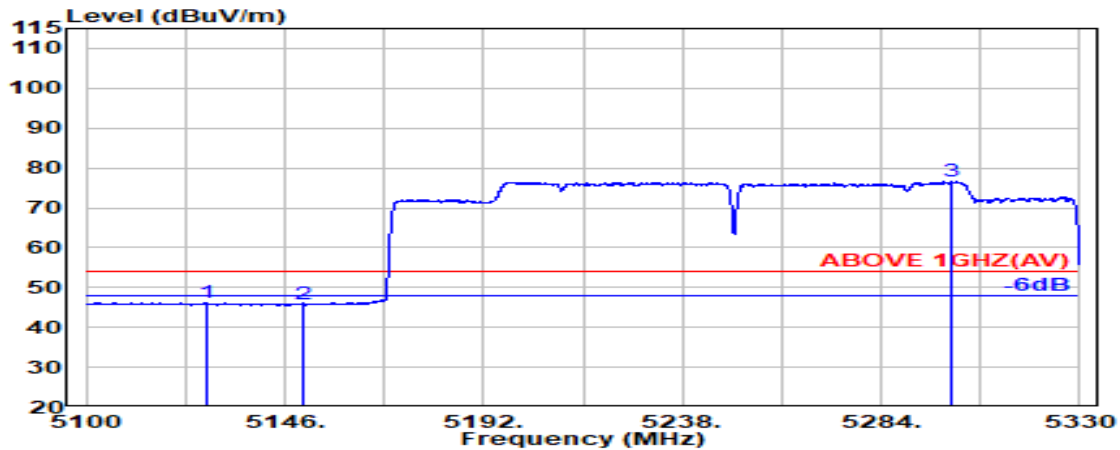


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.700	33.70	8.53	34.35	38.25	46.13	54.00	7.87	Average
5150.000	33.70	8.54	34.34	37.83	45.74	54.00	8.26	Average
@ 5300.400	34.10	8.64	34.28	68.17	76.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

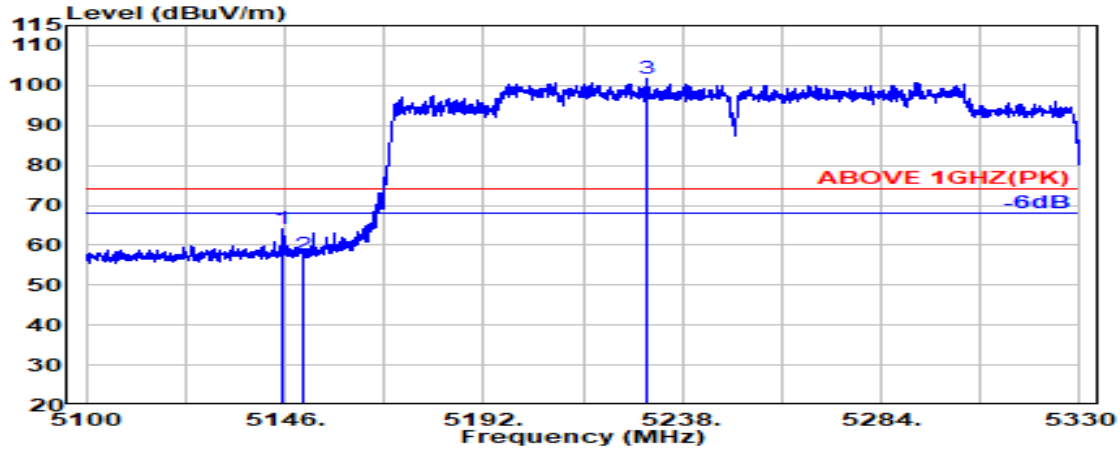

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.70	8.54	34.34	56.28	64.18	74.00	9.82	Peak
5150.000	33.70	8.54	34.34	49.87	57.77	74.00	16.23	Peak
@ 5229.700	33.76	8.59	34.31	93.69	101.73	---	---	Peak

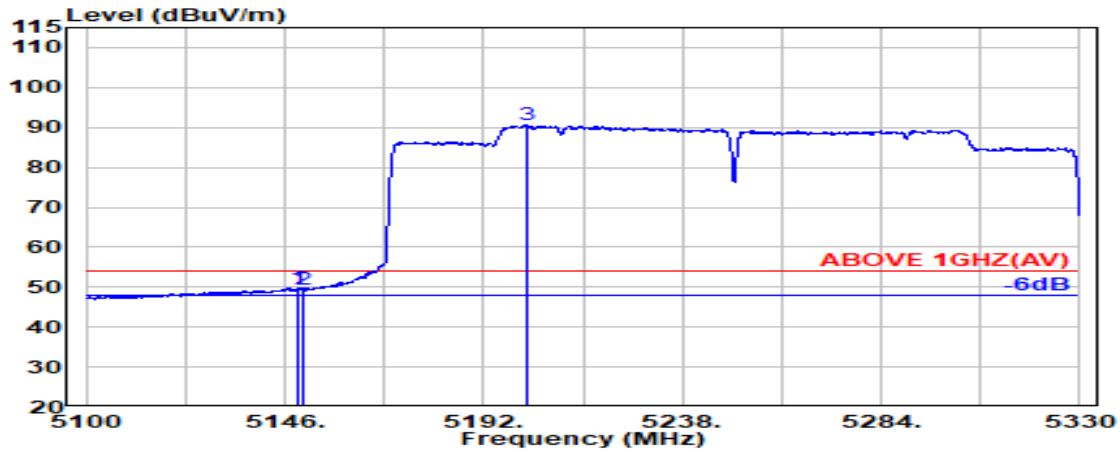


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.70	8.54	34.34	41.85	49.76	54.00	4.24	Average
5150.000	33.70	8.54	34.34	41.50	49.41	54.00	4.59	Average
@ 5201.900	33.70	8.58	34.32	82.68	90.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

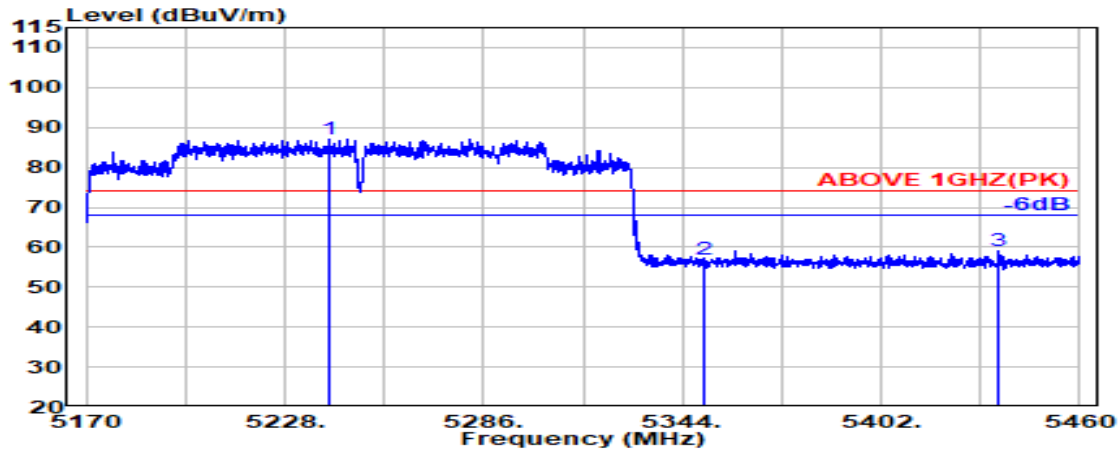

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5240.700	33.78	8.60	34.30	79.11	87.19	---	---	Peak
5350.000	33.90	8.67	34.26	48.62	56.93	74.00	17.07	Peak
5436.200	34.17	8.72	34.22	50.40	59.07	74.00	14.93	Peak

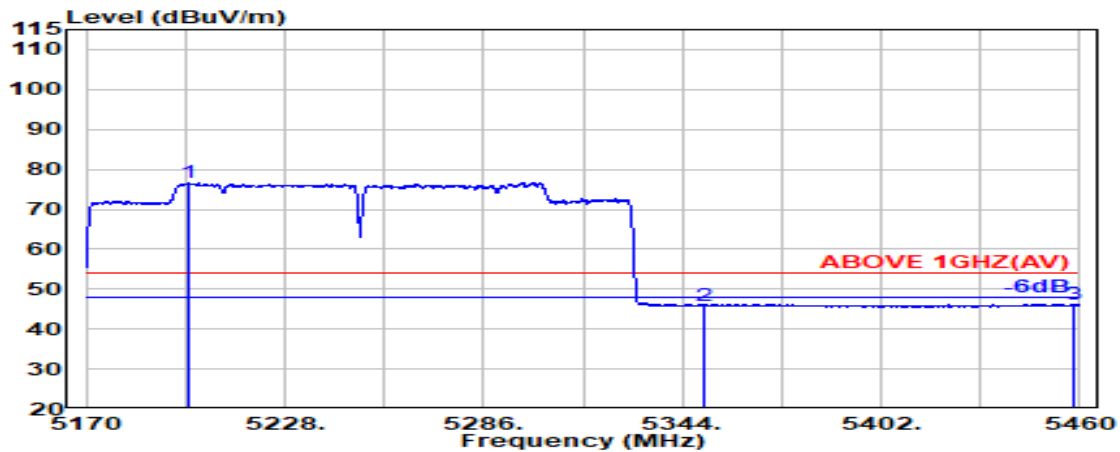


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5199.800	33.70	8.57	34.32	68.66	76.62	---	---	Average
5350.000	33.90	8.67	34.26	37.65	45.96	54.00	8.04	Average
5458.200	34.18	8.73	34.22	37.50	46.19	54.00	7.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

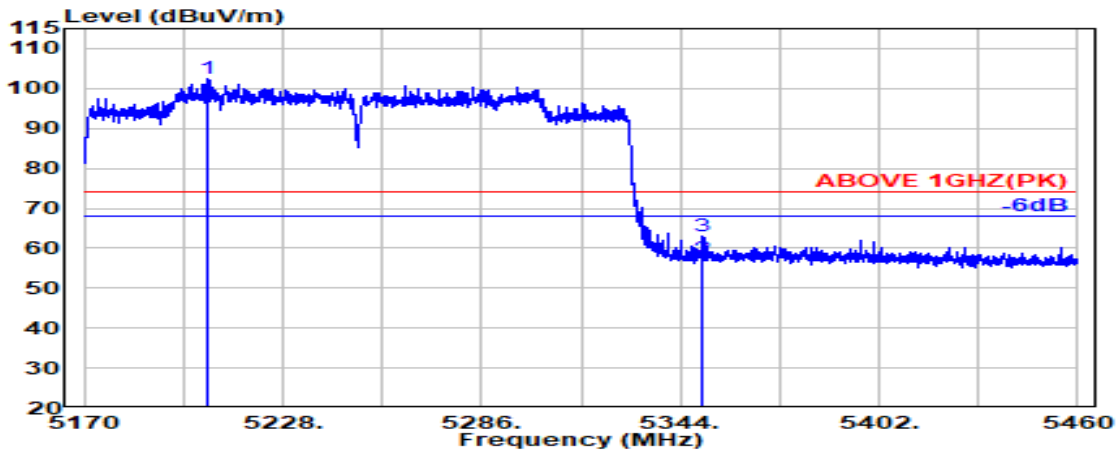

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.300	33.71	8.58	34.32	94.35	102.33	---	---	Peak
5350.000	33.90	8.67	34.26	49.00	57.30	74.00	16.70	Peak
5350.700	33.90	8.67	34.26	54.56	62.87	74.00	11.13	Peak

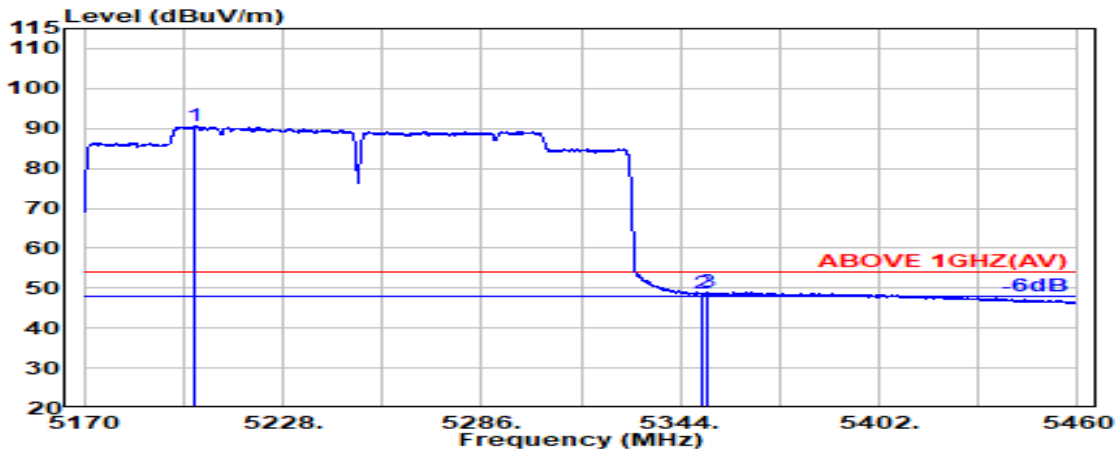


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5202.400	33.70	8.58	34.32	82.75	90.71	---	---	Average
5350.000	33.90	8.67	34.26	40.48	48.78	54.00	5.22	Average
5351.700	33.91	8.67	34.26	40.74	49.06	54.00	4.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

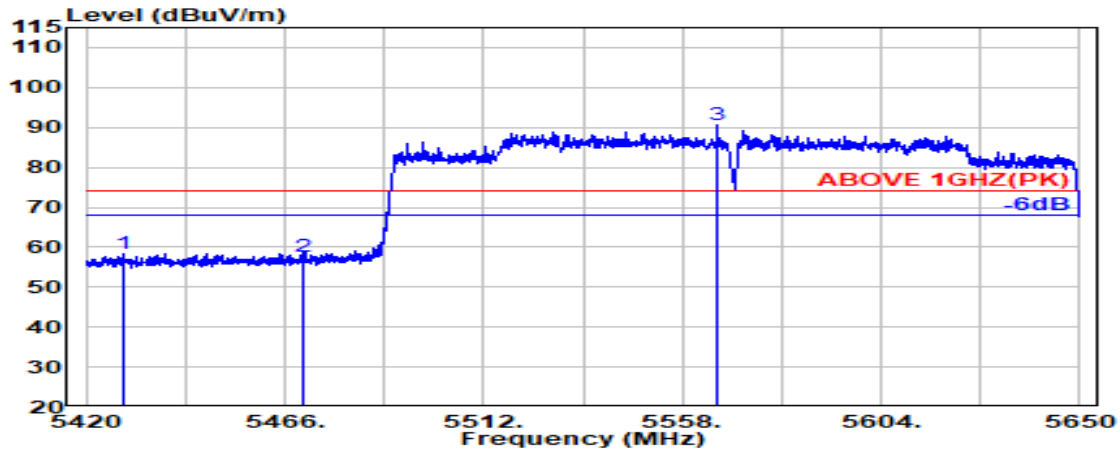

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.400	34.16	8.71	34.23	49.84	58.48	74.00	15.52	Peak
5470.000	34.16	8.74	34.21	49.03	57.71	74.00	16.29	Peak
@ 5566.000	34.07	8.79	34.23	81.85	90.47	---	---	Peak

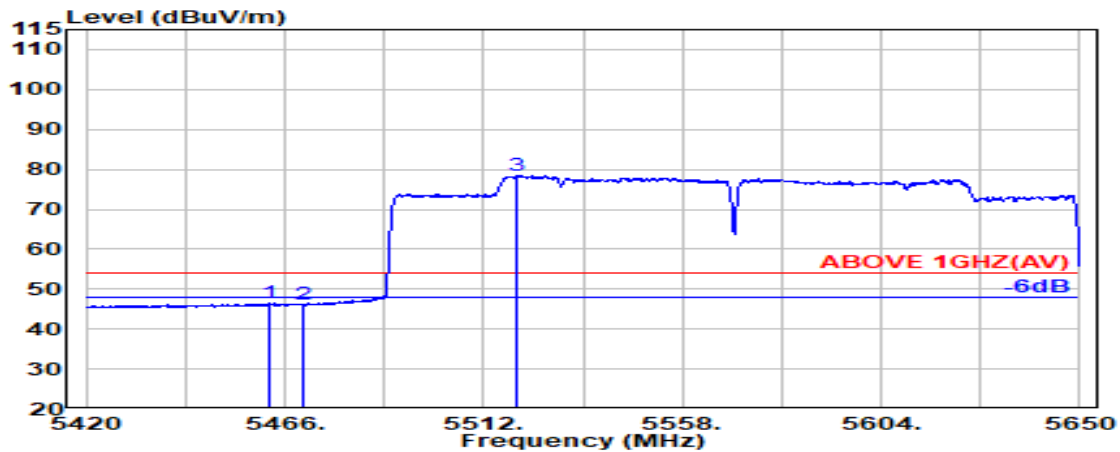


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.18	8.73	34.21	37.83	46.52	54.00	7.48	Average
5470.000	34.16	8.74	34.21	37.54	46.22	54.00	7.78	Average
@ 5519.500	34.10	8.76	34.21	69.72	78.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

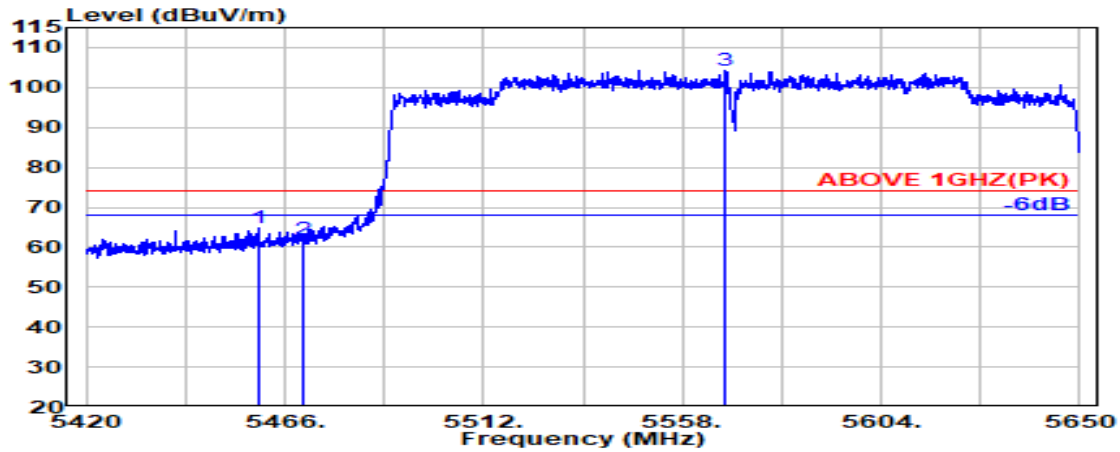

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.100	34.18	8.73	34.22	56.23	64.93	74.00	9.07	Peak
5470.000	34.16	8.74	34.21	53.21	61.89	74.00	12.11	Peak
@ 5567.800	34.06	8.79	34.23	95.70	104.32	---	---	Peak

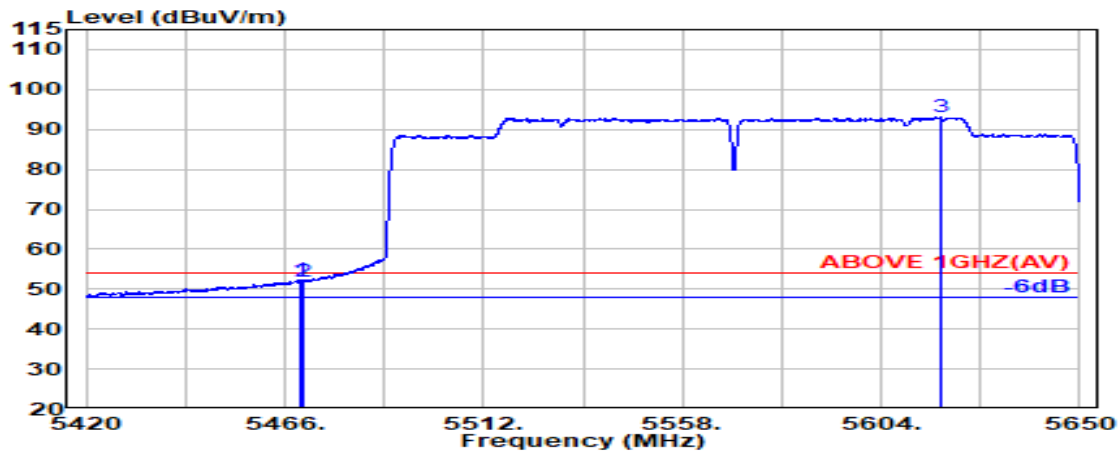


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.16	8.74	34.21	43.52	52.21	54.00	1.79	Average
5470.000	34.16	8.74	34.21	43.24	51.92	54.00	2.08	Average
@ 5617.700	34.00	8.82	34.26	84.47	93.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

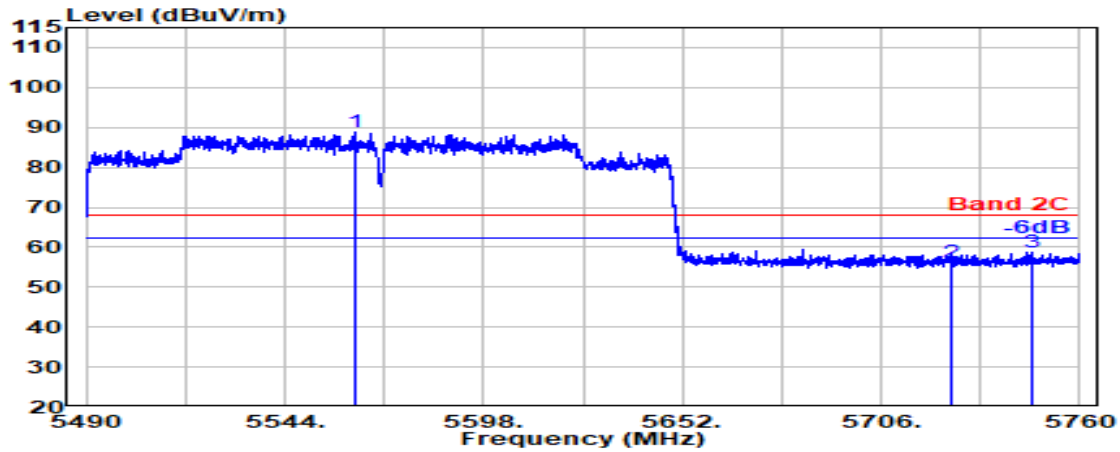

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5562.800	34.07	8.79	34.23	80.13	88.76	---	---	Peak
5725.000	33.80	8.88	34.31	48.01	56.39	68.20	11.81	Peak
5747.100	33.80	8.89	34.32	50.51	58.88	68.20	9.32	Peak

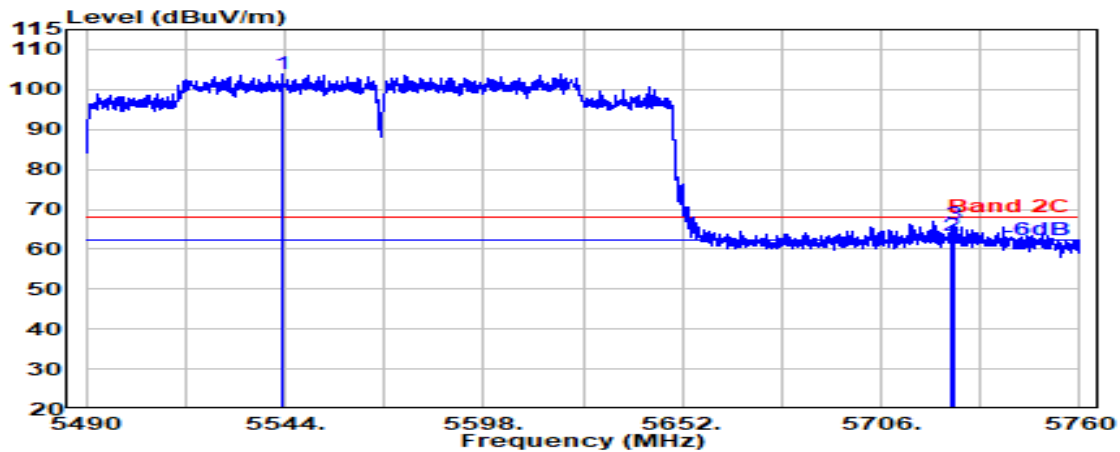


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5543.200	34.10	8.78	34.22	95.37	104.03	---	---	Peak
5725.000	33.80	8.88	34.31	55.13	63.50	68.20	4.70	Peak
5725.500	33.80	8.88	34.31	57.89	66.26	68.20	1.94	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

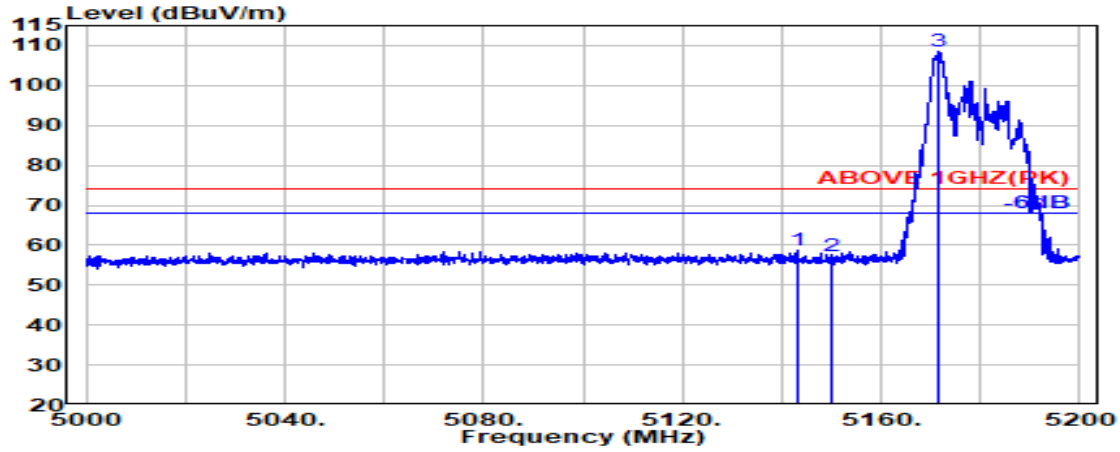

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.000	33.70	8.54	34.34	50.64	58.54	74.00	15.46	Peak
5150.000	33.70	8.54	34.34	49.31	57.22	74.00	16.78	Peak
@ 5171.400	33.70	8.56	34.33	100.53	108.46	---	---	Peak

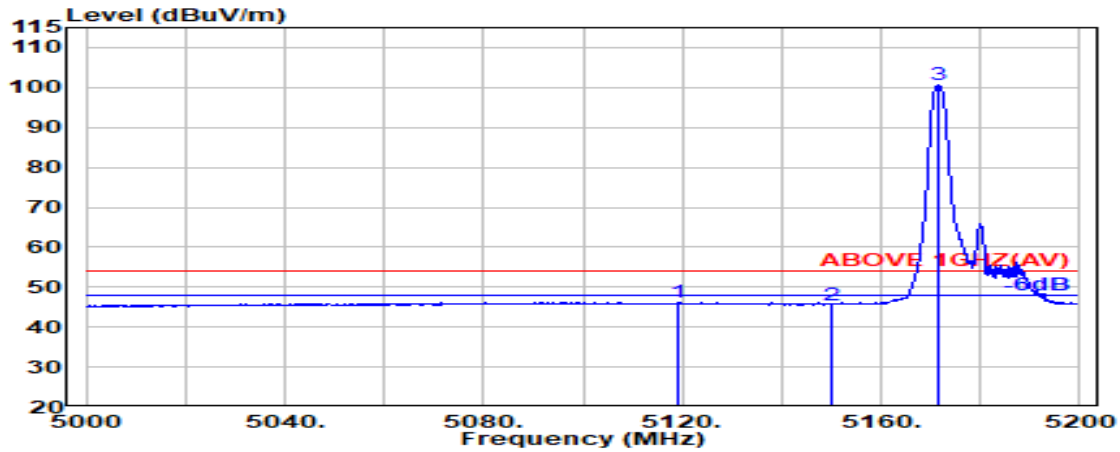


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.300	33.70	8.53	34.35	38.35	46.22	54.00	7.78	Average
5150.000	33.70	8.54	34.34	37.71	45.61	54.00	8.39	Average
@ 5171.600	33.70	8.56	34.33	92.60	100.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

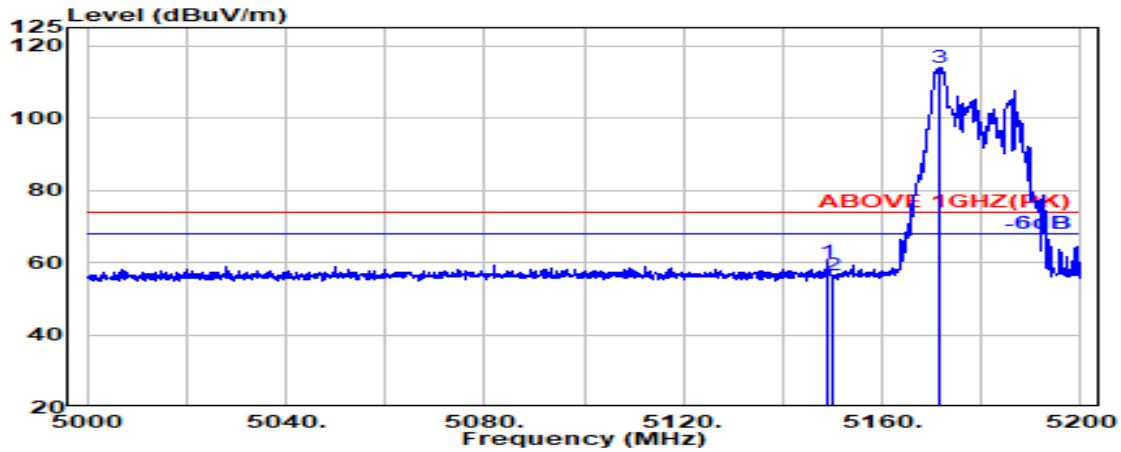

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.70	8.54	34.34	52.00	59.90	74.00	14.10	Peak
5150.000	33.70	8.54	34.34	48.57	56.47	74.00	17.53	Peak
@ 5171.500	33.70	8.56	34.33	106.04	113.97	---	---	Peak

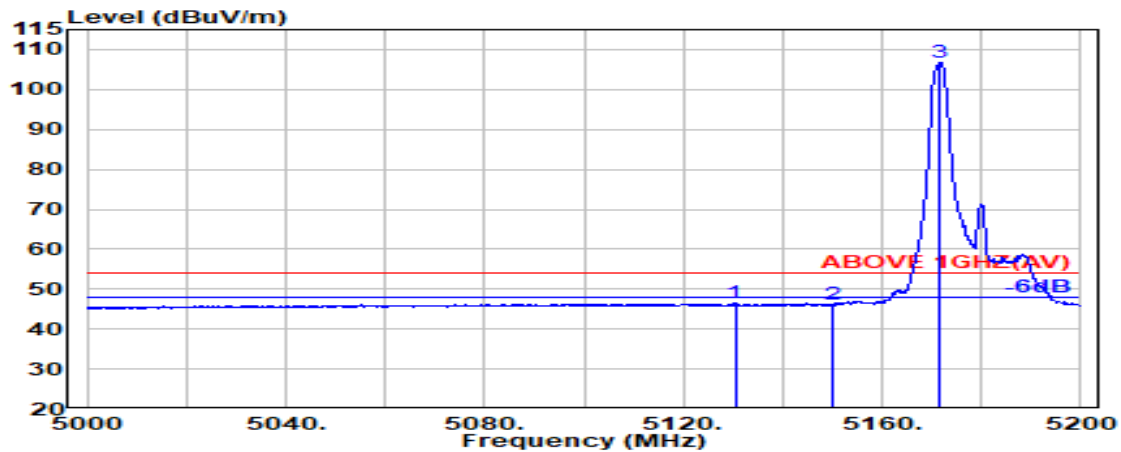


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.400	33.70	8.53	34.35	38.60	46.49	54.00	7.51	Average
5150.000	33.70	8.54	34.34	38.22	46.13	54.00	7.87	Average
@ 5171.700	33.70	8.56	34.33	98.93	106.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

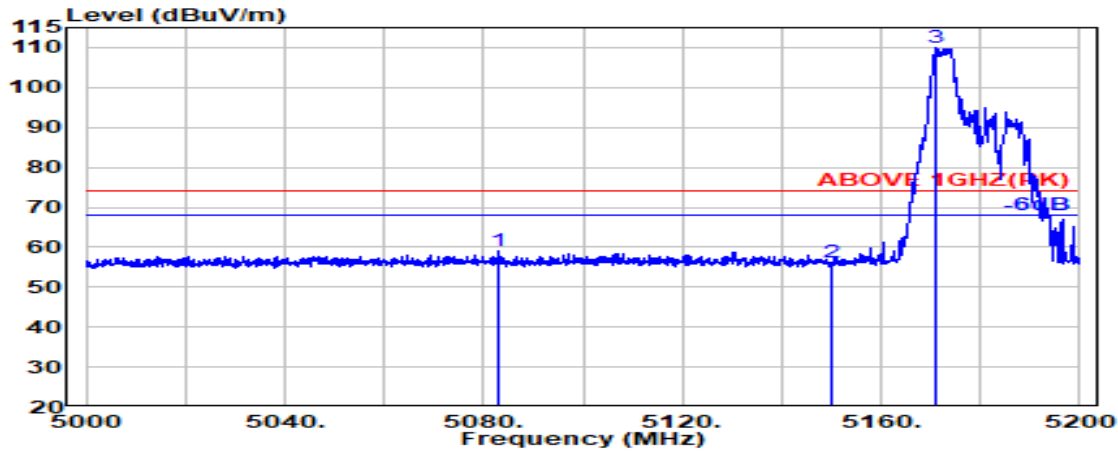

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5083.200	33.63	8.50	34.37	51.40	59.17	74.00	14.83	Peak
5150.000	33.70	8.54	34.34	48.47	56.38	74.00	17.62	Peak
@ 5171.100	33.70	8.56	34.33	101.98	109.91	---	---	Peak

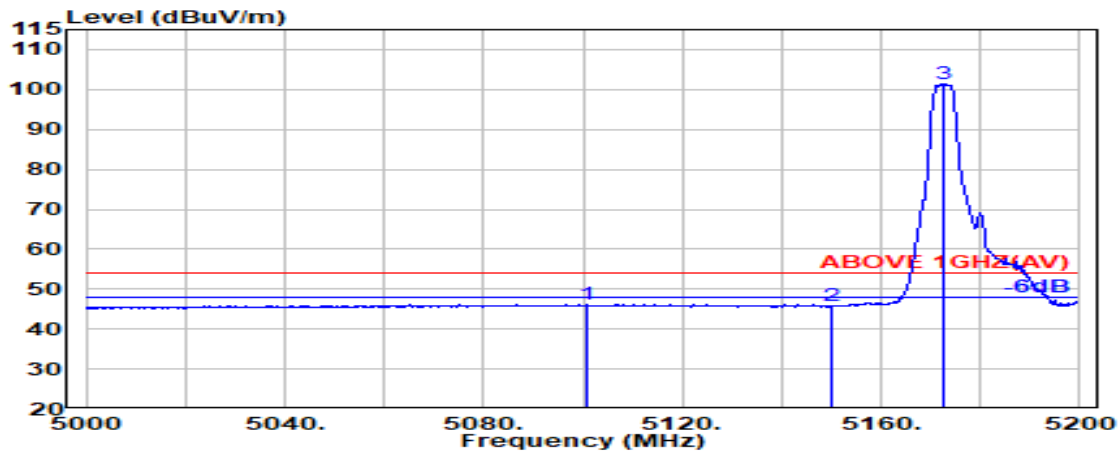


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.900	33.70	8.51	34.36	38.30	46.15	54.00	7.85	Average
5150.000	33.70	8.54	34.34	37.91	45.82	54.00	8.18	Average
@ 5172.400	33.70	8.56	34.33	93.60	101.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

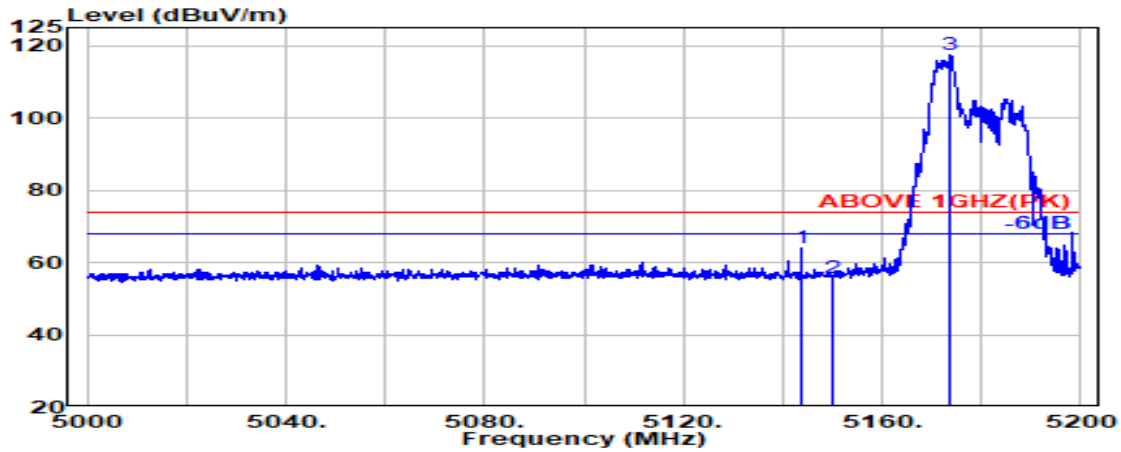

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.800	33.70	8.54	34.34	56.10	63.99	74.00	10.01	Peak
5150.000	33.70	8.54	34.34	47.58	55.48	74.00	18.52	Peak
@ 5173.800	33.70	8.56	34.33	109.60	117.53	---	---	Peak

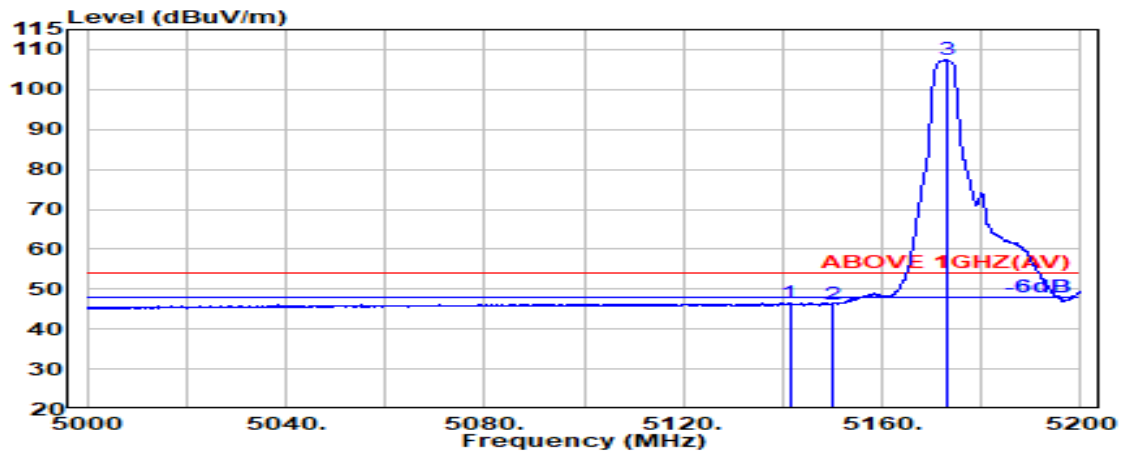


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.400	33.70	8.54	34.34	38.70	46.60	54.00	7.40	Average
5150.000	33.70	8.54	34.34	38.41	46.32	54.00	7.68	Average
@ 5173.100	33.70	8.56	34.33	99.45	107.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

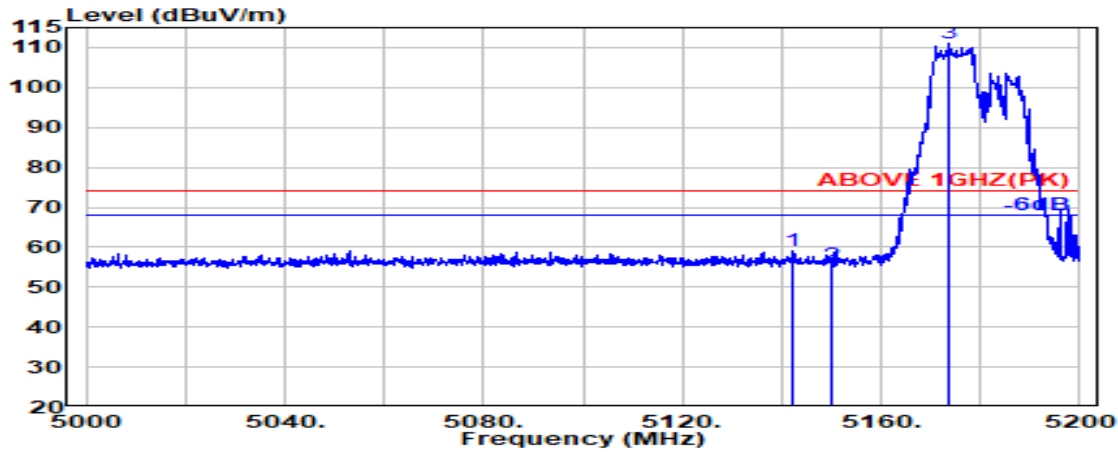

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.400	33.70	8.54	34.34	51.29	59.19	74.00	14.81	Peak
5150.000	33.70	8.54	34.34	47.59	55.49	74.00	18.51	Peak
@ 5173.700	33.70	8.56	34.33	102.98	110.91	---	---	Peak

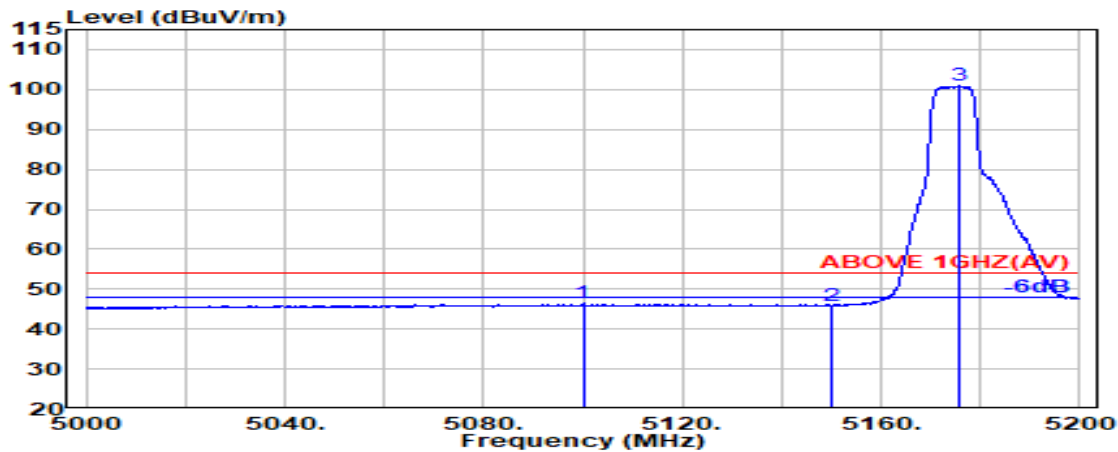


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.000	33.70	8.51	34.36	38.51	46.37	54.00	7.63	Average
5150.000	33.70	8.54	34.34	38.06	45.97	54.00	8.03	Average
@ 5175.800	33.70	8.56	34.33	93.04	100.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

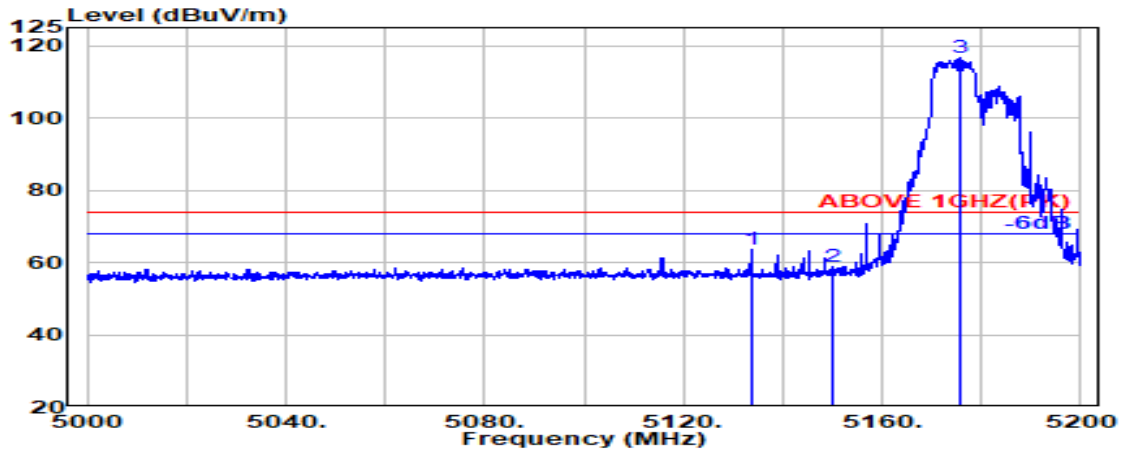

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.700	33.70	8.53	34.34	55.54	63.43	74.00	10.57	Peak
5150.000	33.70	8.54	34.34	50.95	58.86	74.00	15.14	Peak
@ 5175.800	33.70	8.56	34.33	108.62	116.56	---	---	Peak

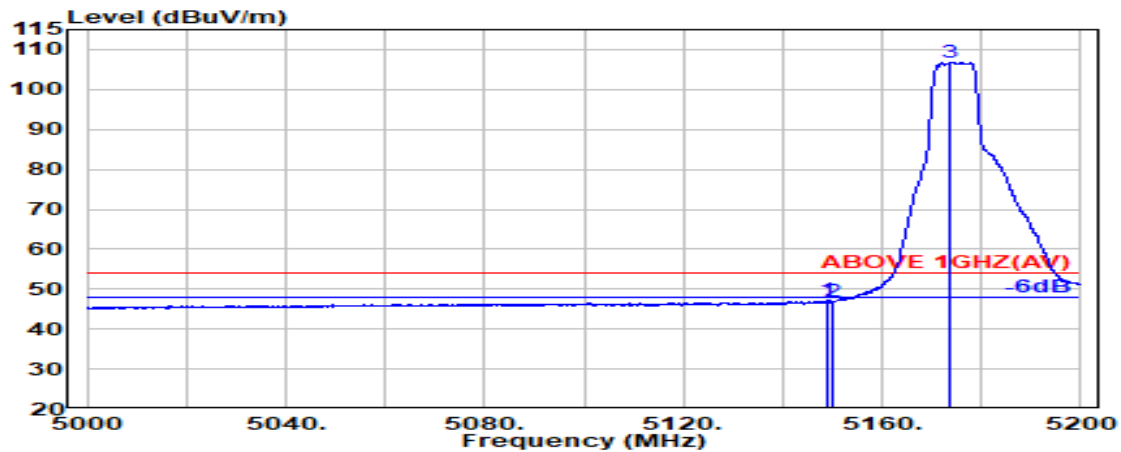


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.70	8.54	34.34	39.27	47.18	54.00	6.82	Average
5150.000	33.70	8.54	34.34	39.05	46.95	54.00	7.05	Average
@ 5173.800	33.70	8.56	34.33	98.90	106.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

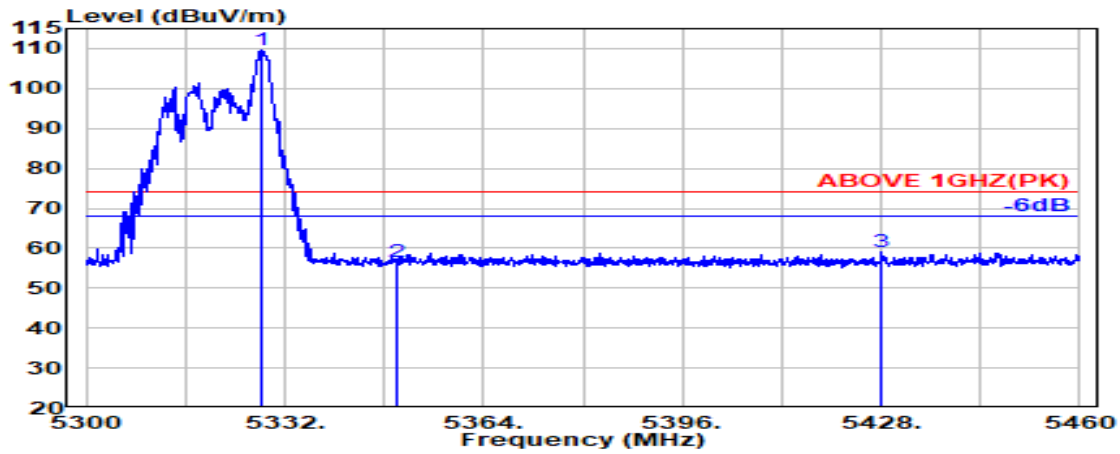

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.99	8.65	34.27	101.33	109.70	---	---	Peak
5350.000	33.90	8.67	34.26	48.31	56.61	74.00	17.39	Peak
5428.100	34.16	8.71	34.23	50.34	58.98	74.00	15.02	Peak

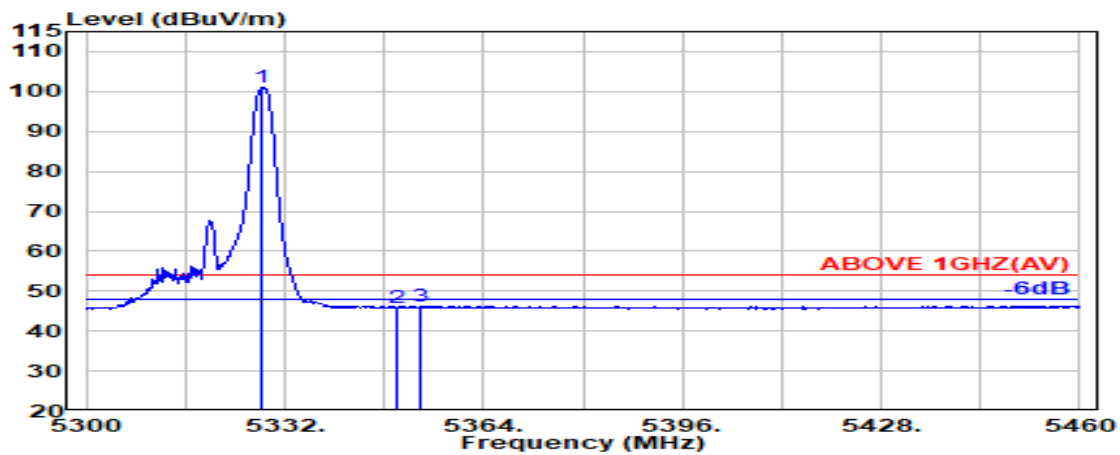


## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.99	8.65	34.27	92.71	101.09	---	---	Average
5350.000	33.90	8.67	34.26	37.65	45.96	54.00	8.04	Average
5353.700	33.91	8.67	34.26	37.98	46.31	54.00	7.69	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

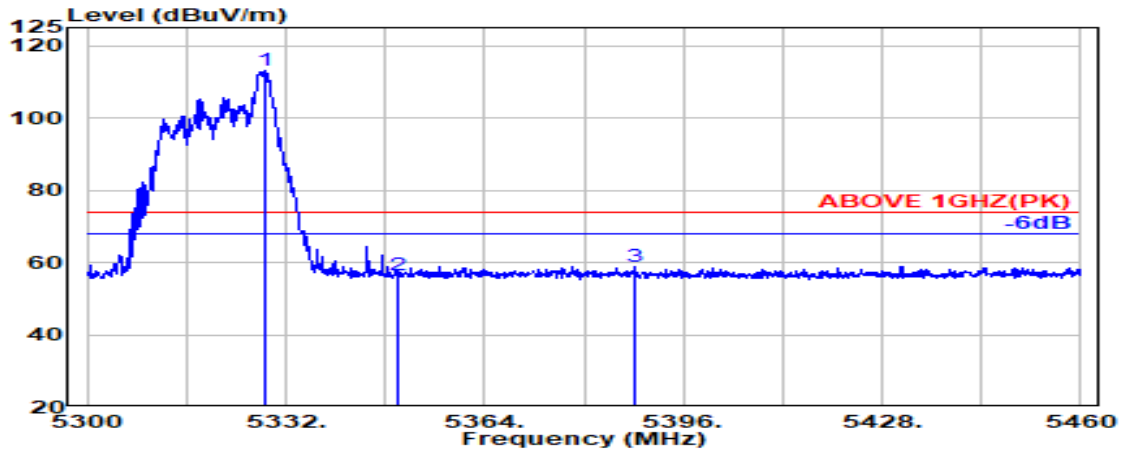

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.99	8.65	34.27	104.71	113.08	---	---	Peak
5350.000	33.90	8.67	34.26	48.31	56.61	74.00	17.39	Peak
5388.200	34.05	8.69	34.24	50.51	59.01	74.00	14.99	Peak

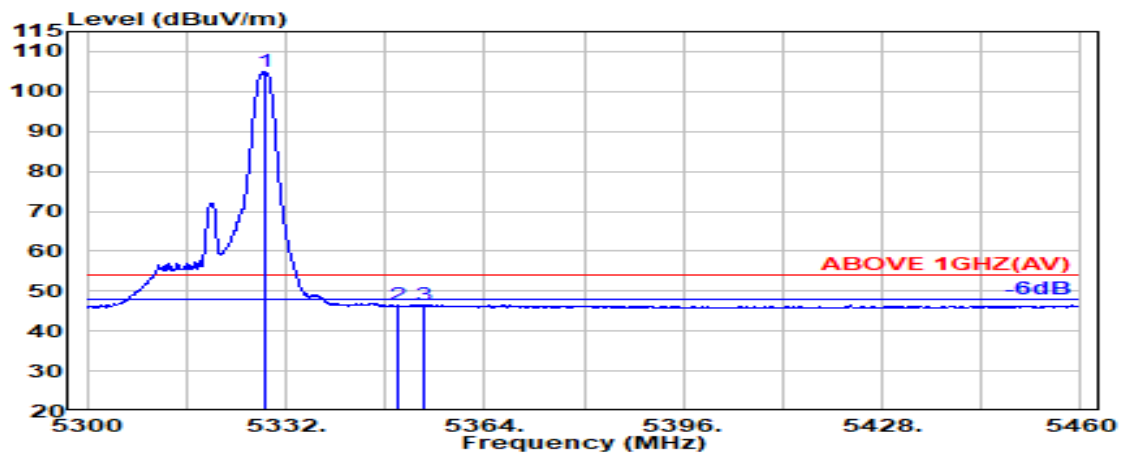


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.99	8.65	34.27	96.63	105.00	---	---	Average
5350.000	33.90	8.67	34.26	38.06	46.37	54.00	7.63	Average
5354.400	33.92	8.67	34.26	38.26	46.59	54.00	7.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

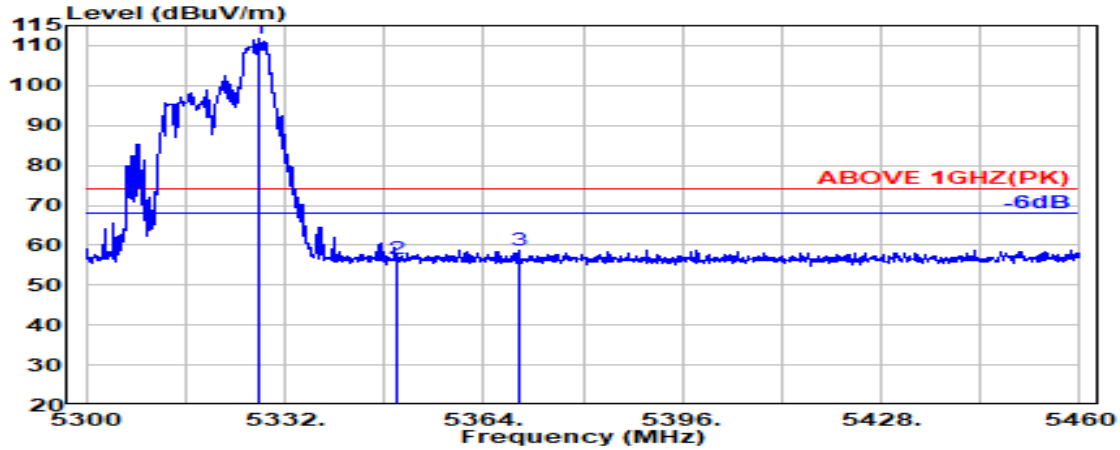

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.700	33.99	8.65	34.27	103.42	111.80	---	---	Peak
5350.000	33.90	8.67	34.26	48.11	56.41	74.00	17.59	Peak
5369.600	33.98	8.68	34.25	50.46	58.86	74.00	15.14	Peak

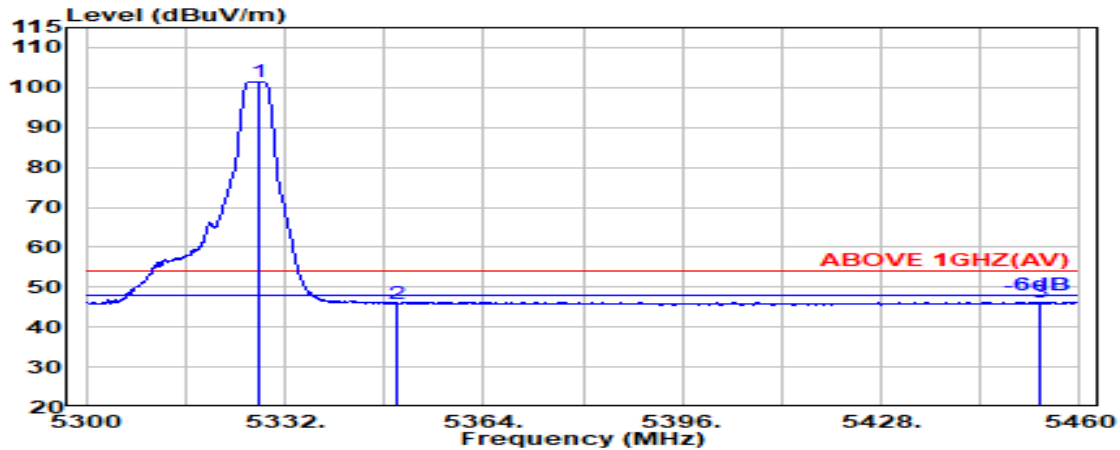


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.99	8.65	34.27	93.18	101.55	---	---	Average
5350.000	33.90	8.67	34.26	37.66	45.97	54.00	8.03	Average
5453.700	34.19	8.73	34.22	37.62	46.32	54.00	7.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

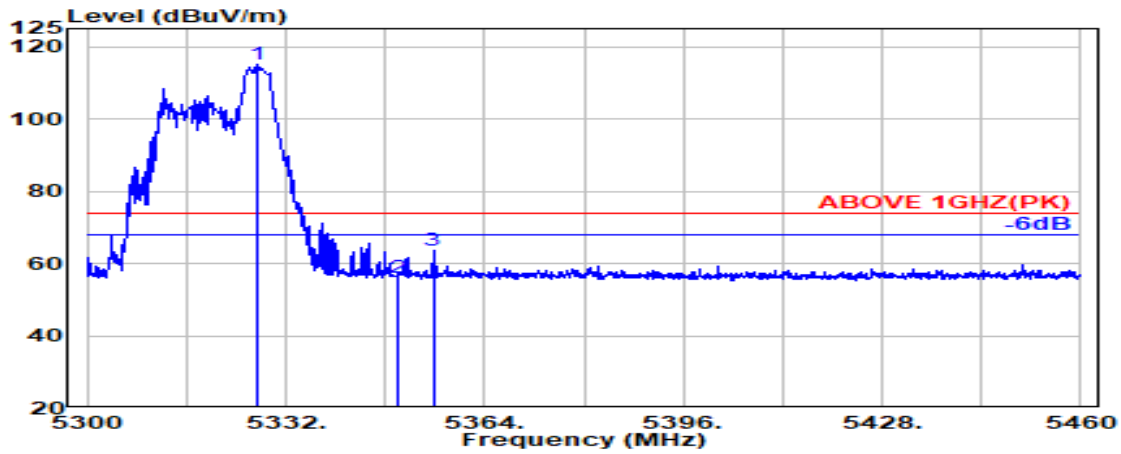

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	33.99	8.65	34.27	106.79	115.16	---	---	Peak
5350.000	33.90	8.67	34.26	47.92	56.23	74.00	17.77	Peak
5355.700	33.92	8.67	34.26	55.18	63.52	74.00	10.48	Peak

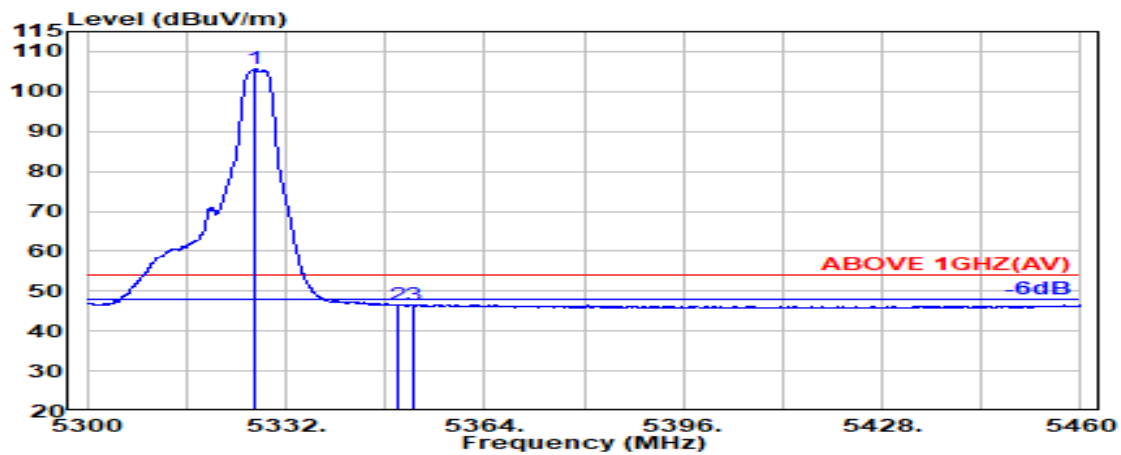


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.900	33.99	8.65	34.27	97.27	105.65	---	---	Average
5350.000	33.90	8.67	34.26	38.10	46.41	54.00	7.59	Average
5352.600	33.91	8.67	34.26	38.33	46.65	54.00	7.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

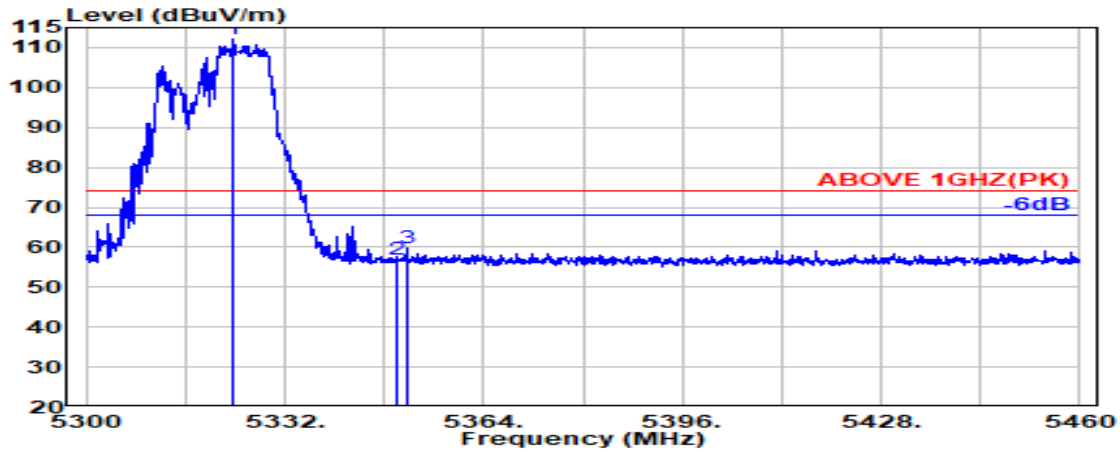

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	34.00	8.65	34.27	103.76	112.15	---	---	Peak
5350.000	33.90	8.67	34.26	48.57	56.88	74.00	17.12	Peak
5351.700	33.91	8.67	34.26	51.41	59.73	74.00	14.27	Peak

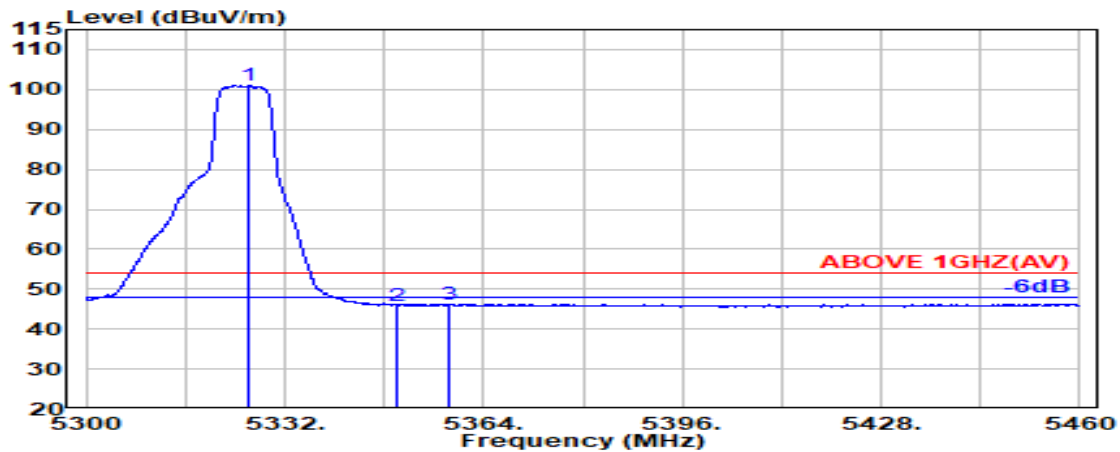


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.200	33.99	8.65	34.27	92.72	101.10	---	---	Average
5350.000	33.90	8.67	34.26	37.64	45.95	54.00	8.05	Average
5358.500	33.93	8.67	34.25	37.97	46.32	54.00	7.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

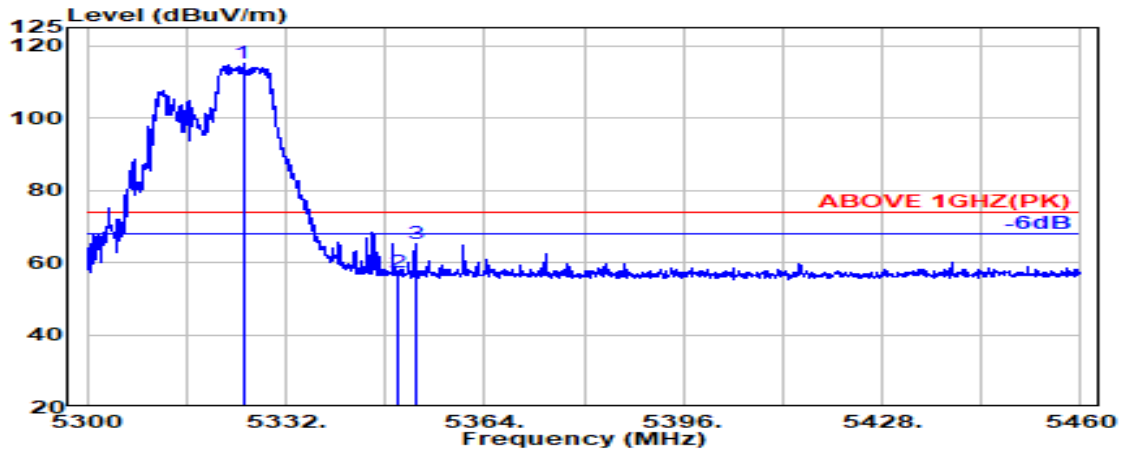

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.100	34.00	8.65	34.27	106.60	114.98	---	---	Peak
5350.000	33.90	8.67	34.26	49.12	57.43	74.00	16.57	Peak
5352.800	33.91	8.67	34.26	56.84	65.16	74.00	8.84	Peak

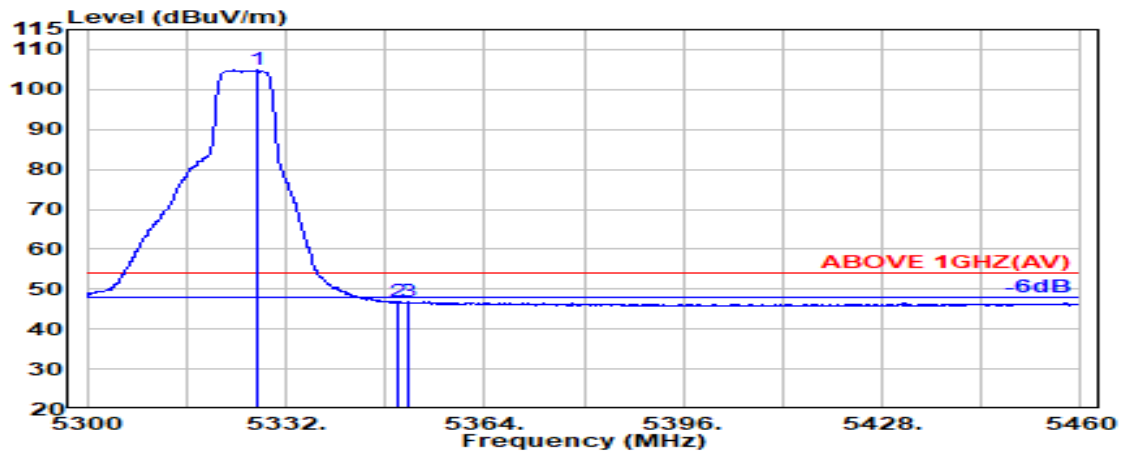


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.400	33.99	8.65	34.27	96.57	104.94	---	---	Average
5350.000	33.90	8.67	34.26	38.46	46.76	54.00	7.24	Average
5351.600	33.91	8.67	34.26	38.61	46.92	54.00	7.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

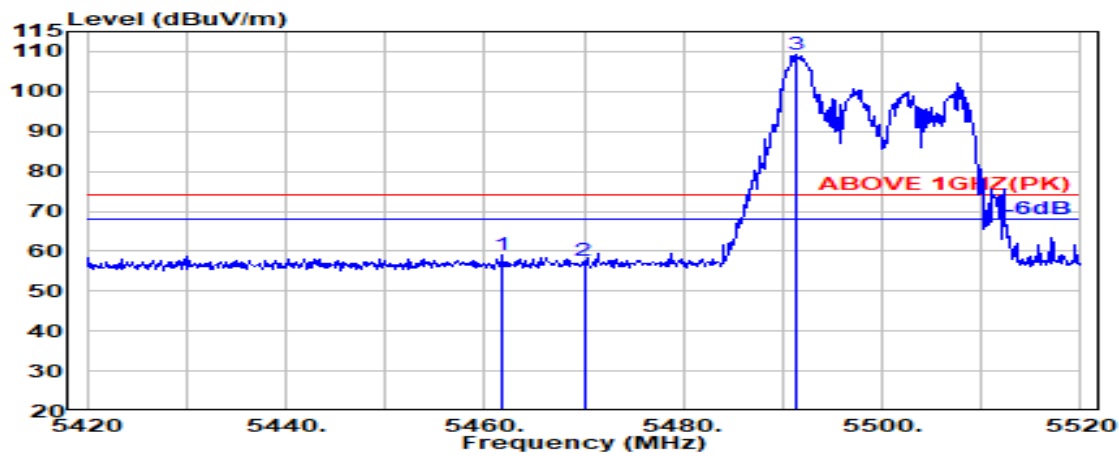

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.800	34.18	8.73	34.21	50.38	59.08	74.00	14.92	Peak
5470.000	34.16	8.74	34.21	48.91	57.60	74.00	16.40	Peak
@ 5491.300	34.12	8.75	34.20	100.50	109.16	---	---	Peak

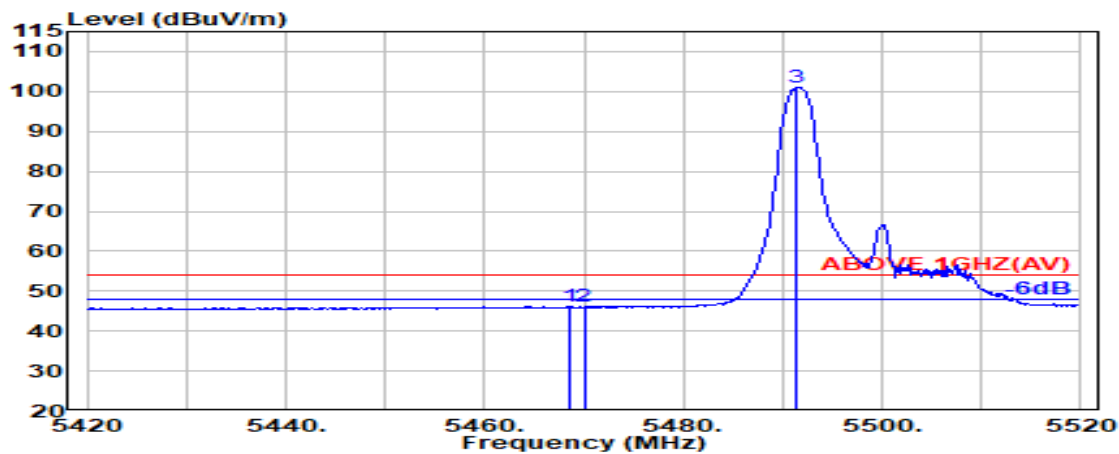


## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.21	37.44	46.12	54.00	7.88	Average
5470.000	34.16	8.74	34.21	37.37	46.06	54.00	7.94	Average
@ 5491.400	34.12	8.75	34.20	92.52	101.18	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

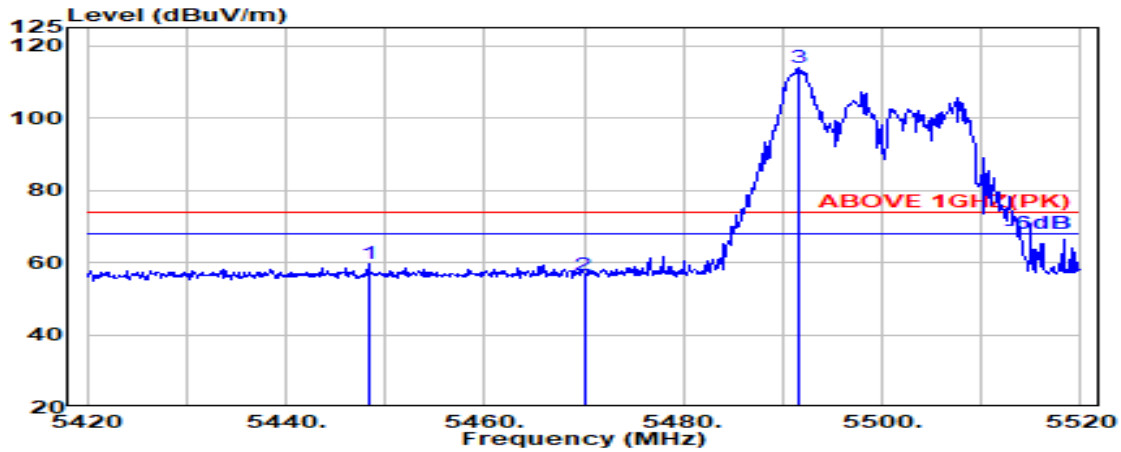

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.300	34.20	8.72	34.22	50.86	59.56	74.00	14.44	Peak
5470.000	34.16	8.74	34.21	47.74	56.43	74.00	17.57	Peak
@ 5491.500	34.12	8.75	34.20	105.25	113.91	---	---	Peak

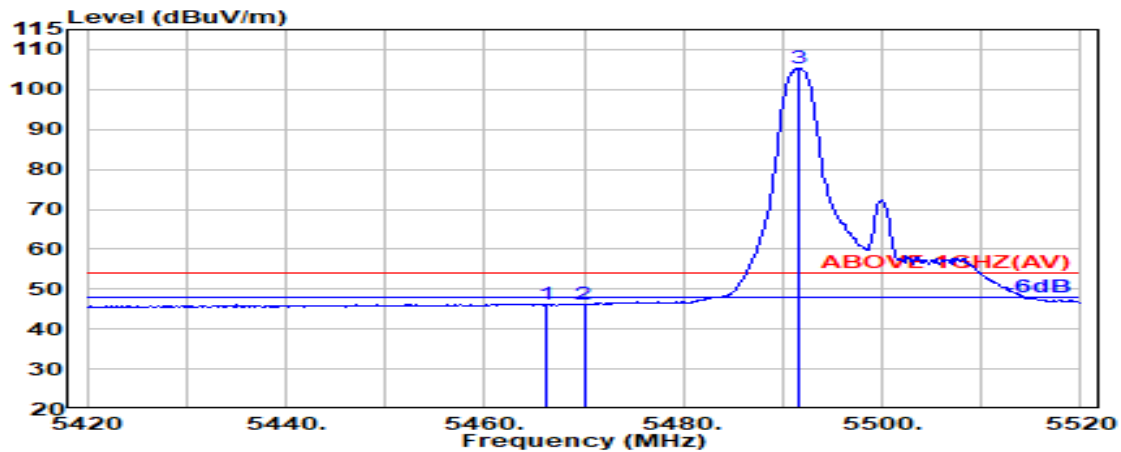


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.21	37.65	46.34	54.00	7.66	Average
5470.000	34.16	8.74	34.21	37.54	46.22	54.00	7.78	Average
@ 5491.500	34.12	8.75	34.20	96.61	105.27	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

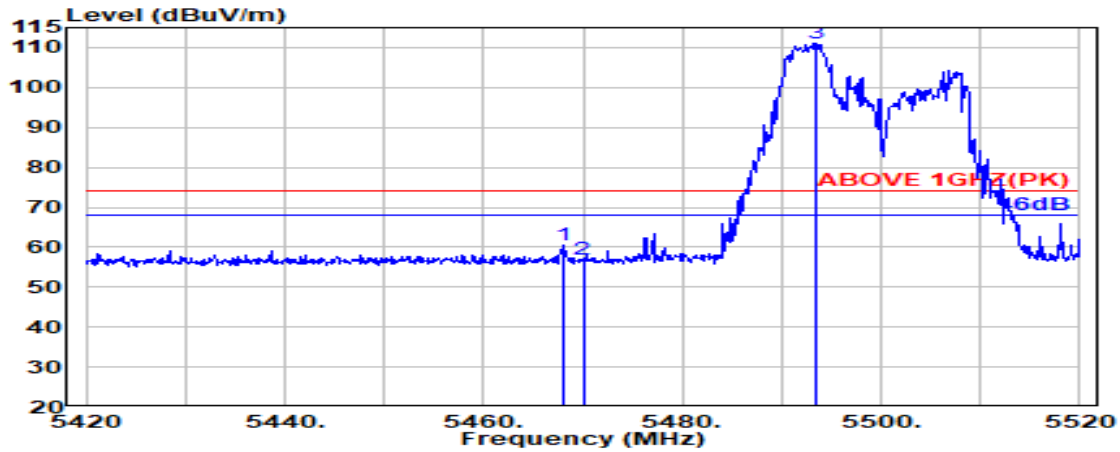

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.16	8.73	34.21	51.89	60.58	74.00	13.42	Peak
5470.000	34.16	8.74	34.21	48.19	56.87	74.00	17.13	Peak
@ 5493.400	34.11	8.75	34.20	102.55	111.21	---	---	Peak

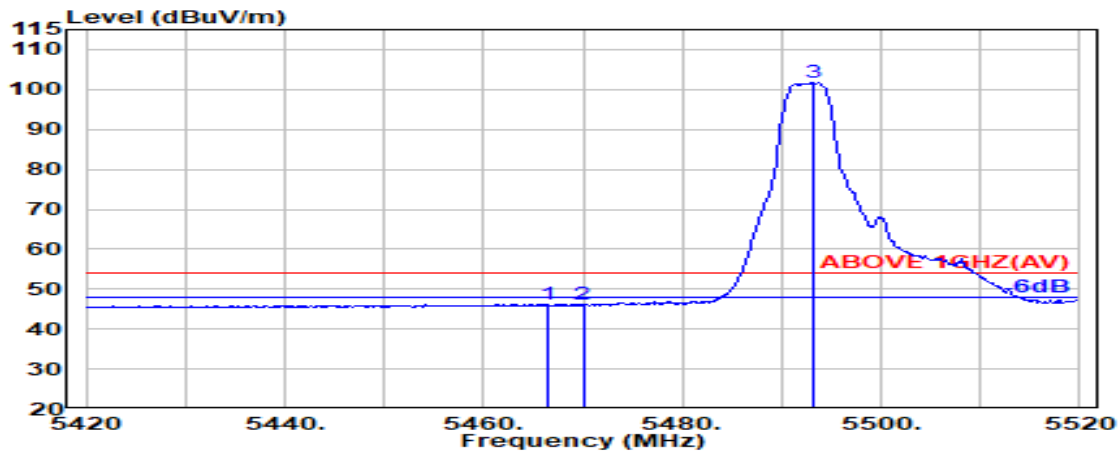


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.17	8.73	34.21	37.45	46.14	54.00	7.86	Average
5470.000	34.16	8.74	34.21	37.33	46.01	54.00	7.99	Average
@ 5493.200	34.11	8.75	34.20	93.07	101.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

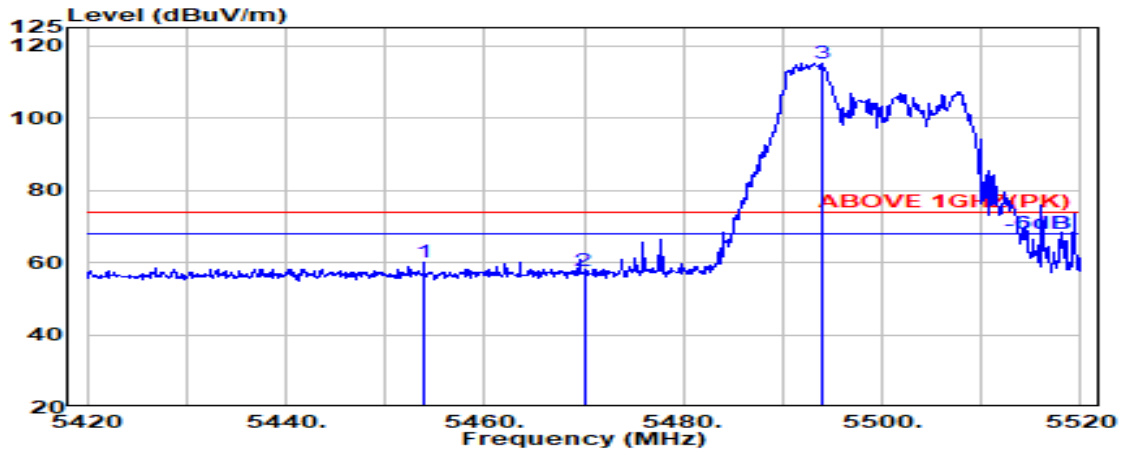

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.900	34.19	8.73	34.22	51.26	59.96	74.00	14.04	Peak
5470.000	34.16	8.74	34.21	48.78	57.47	74.00	16.53	Peak
@ 5494.000	34.11	8.75	34.20	106.59	115.25	---	---	Peak

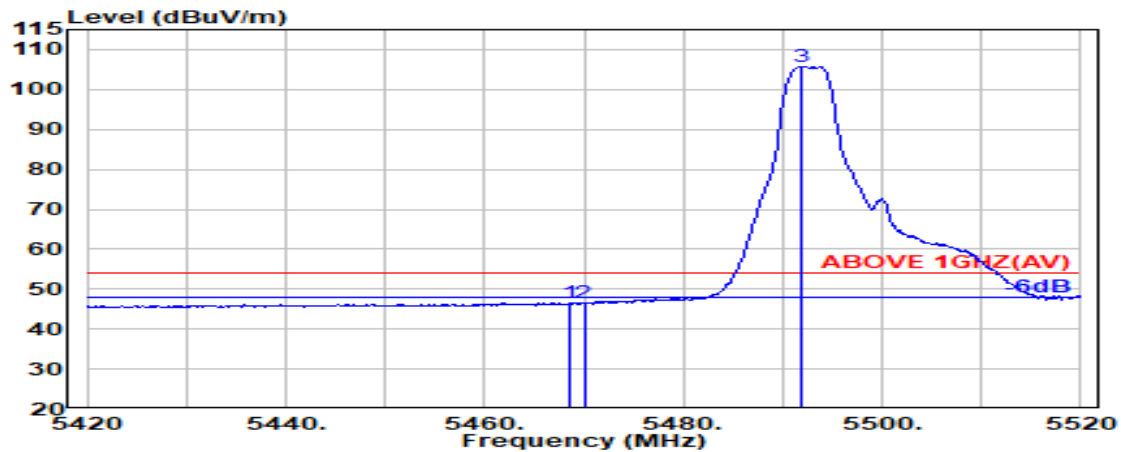


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.21	37.86	46.55	54.00	7.45	Average
5470.000	34.16	8.74	34.21	37.86	46.54	54.00	7.46	Average
@ 5492.000	34.12	8.75	34.20	97.16	105.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

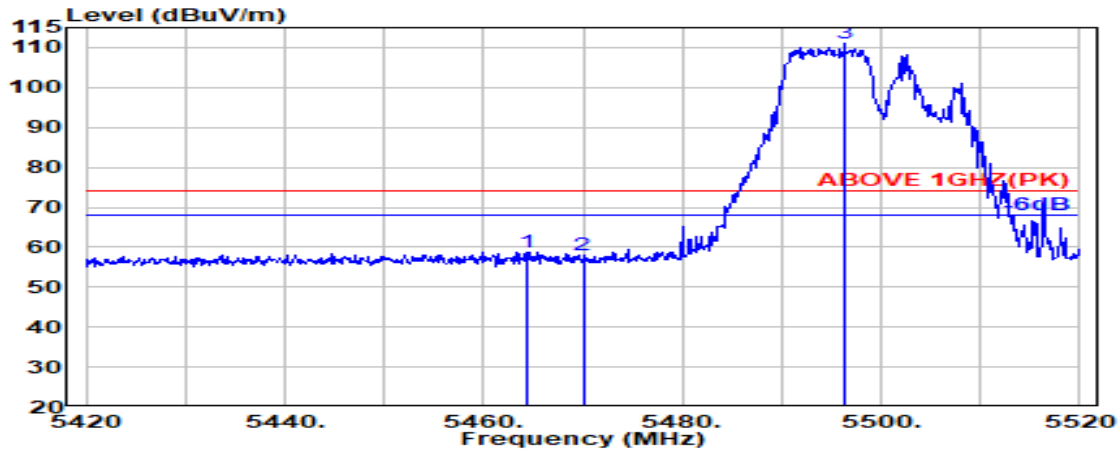

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.17	8.73	34.21	50.10	58.79	74.00	15.21	Peak
5470.000	34.16	8.74	34.21	49.30	57.98	74.00	16.02	Peak
@ 5496.300	34.11	8.75	34.20	102.31	110.97	---	---	Peak

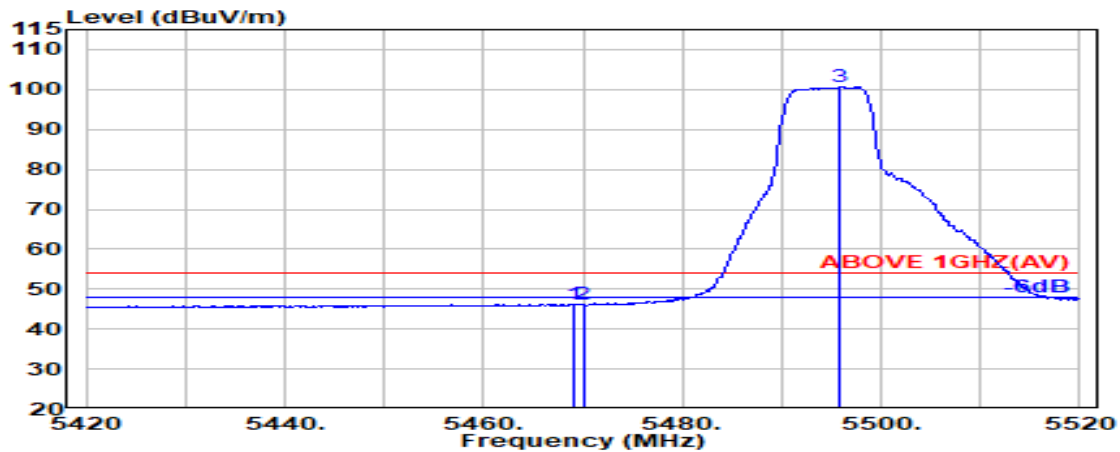


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.21	37.51	46.20	54.00	7.80	Average
5470.000	34.16	8.74	34.21	37.32	46.00	54.00	8.00	Average
@ 5495.900	34.11	8.75	34.20	91.93	100.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

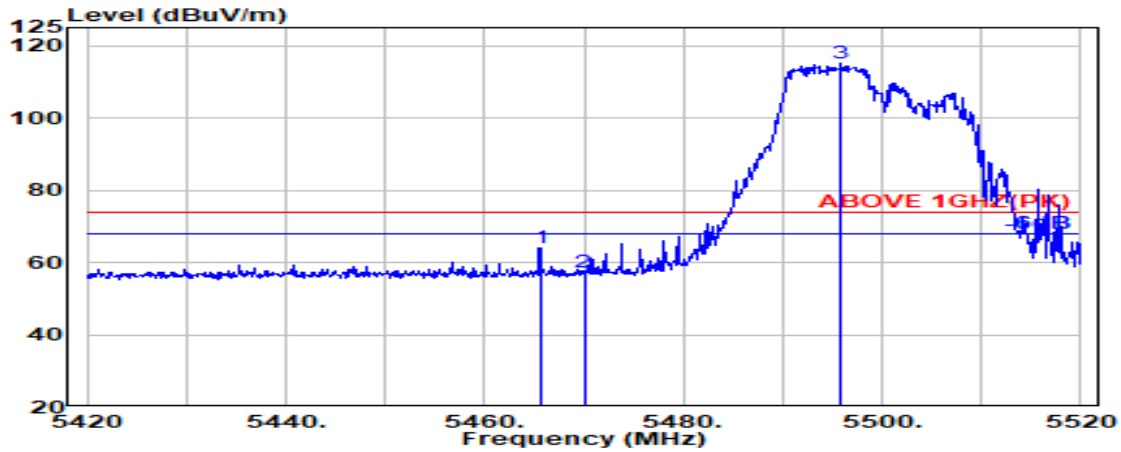

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.17	8.73	34.21	55.18	63.86	74.00	10.14	Peak
5470.000	34.16	8.74	34.21	48.50	57.18	74.00	16.82	Peak
@ 5495.900	34.11	8.75	34.20	106.58	115.23	---	---	Peak

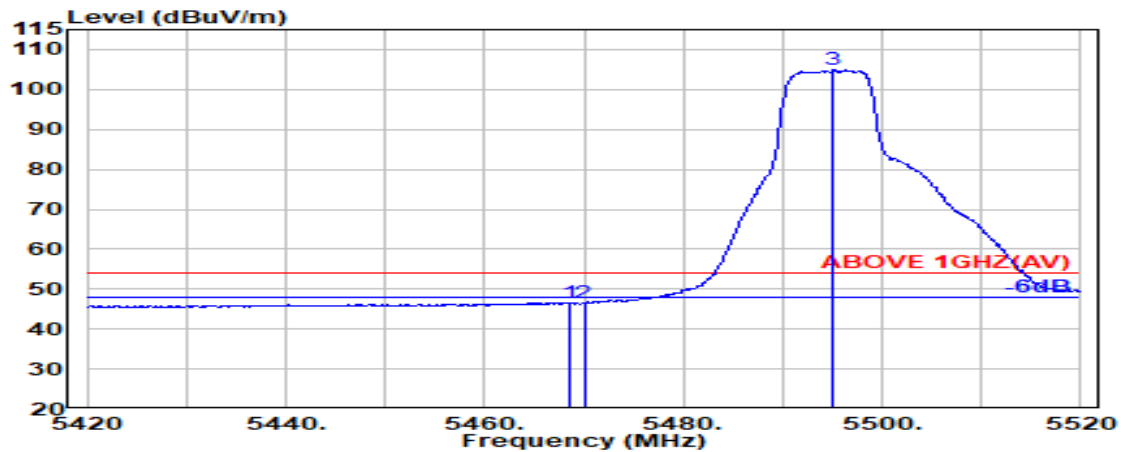


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.21	37.97	46.65	54.00	7.35	Average
5470.000	34.16	8.74	34.21	37.85	46.53	54.00	7.47	Average
@ 5495.100	34.11	8.75	34.20	96.38	105.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

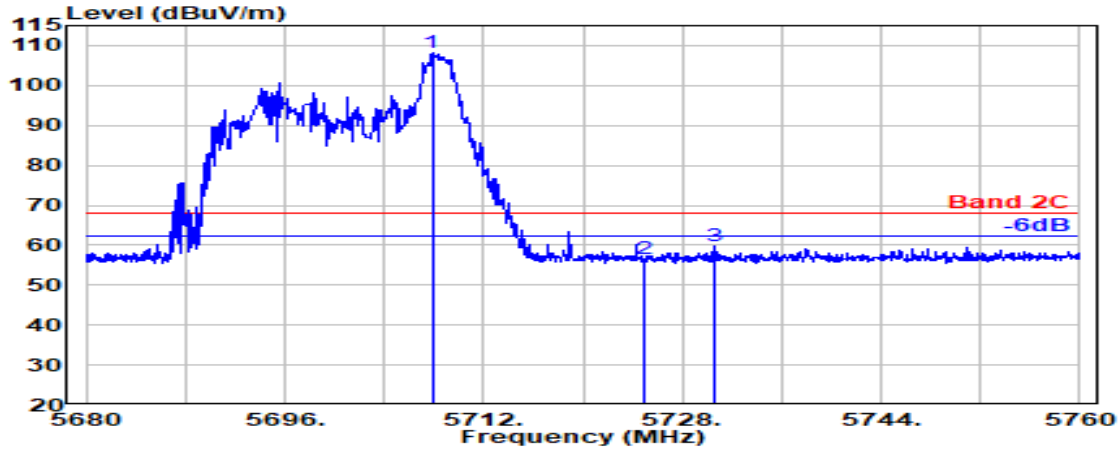

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.850	33.80	8.87	34.30	99.78	108.15	---	---	Peak
5725.000	33.80	8.88	34.31	48.19	56.56	68.20	11.64	Peak
5730.650	33.80	8.88	34.31	51.49	59.86	68.20	8.34	Peak

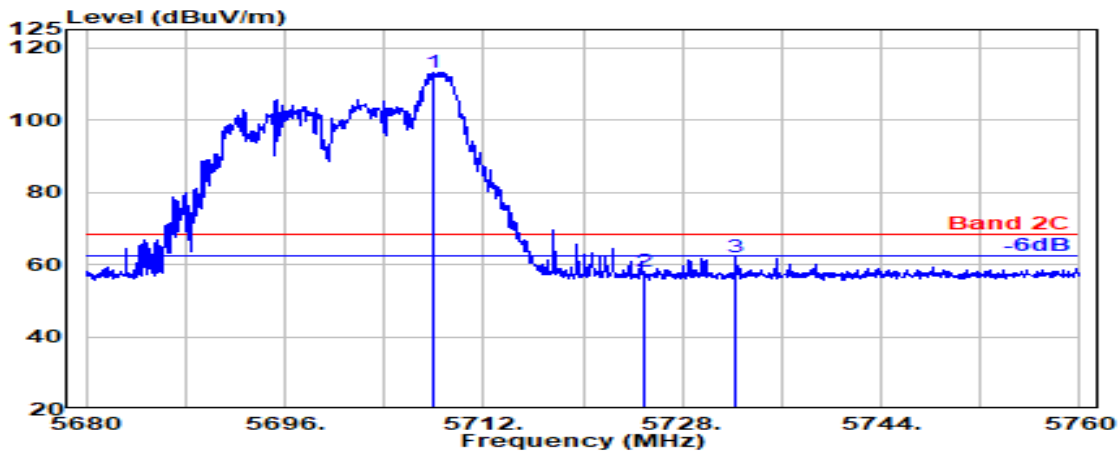


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.950	33.80	8.87	34.30	104.91	113.28	---	---	Peak
5725.000	33.80	8.88	34.31	49.54	57.91	68.20	10.29	Peak
5732.300	33.80	8.88	34.31	53.82	62.19	68.20	6.01	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

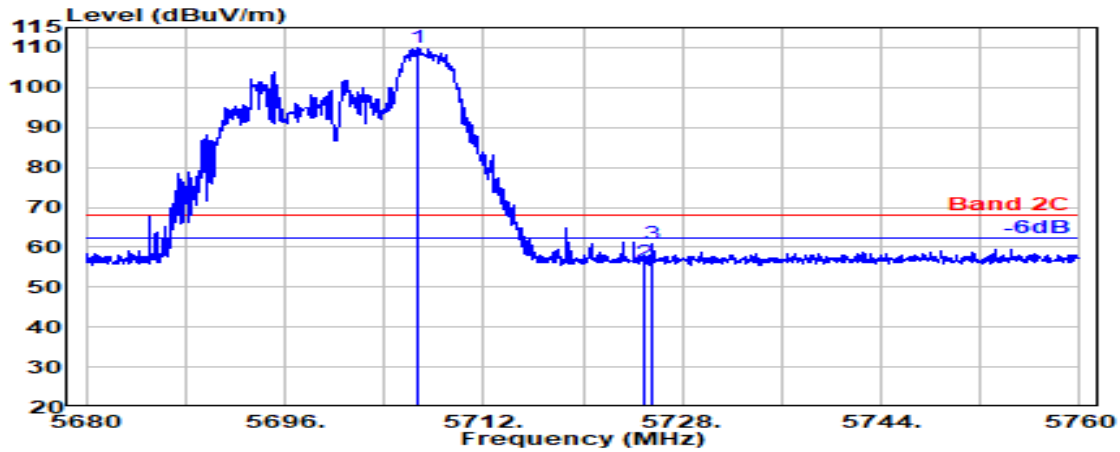

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.600	33.80	8.87	34.30	101.62	109.99	---	---	Peak
5725.000	33.80	8.88	34.31	47.80	56.18	68.20	12.02	Peak
5725.650	33.80	8.88	34.31	52.58	60.95	68.20	7.25	Peak

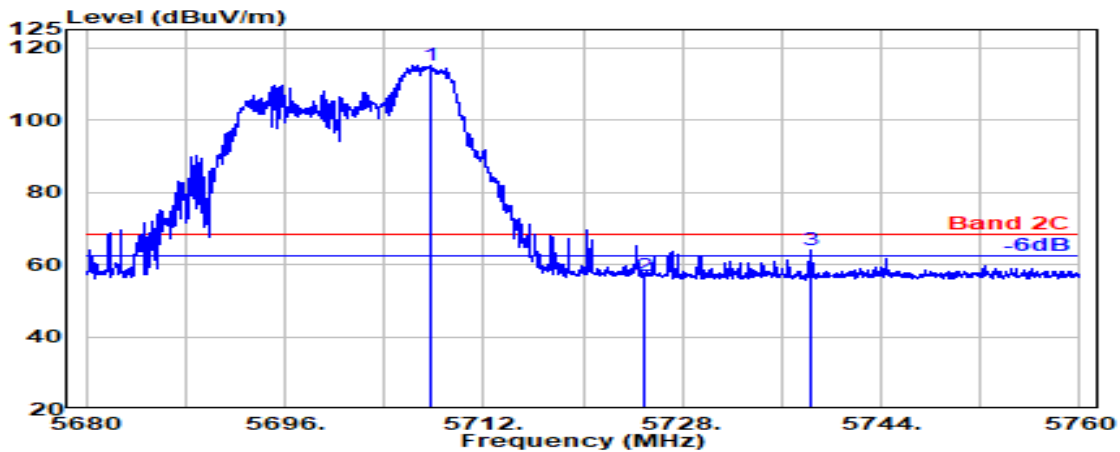


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.650	33.80	8.87	34.30	106.76	115.13	---	---	Peak
5725.000	33.80	8.88	34.31	48.46	56.84	68.20	11.36	Peak
5738.400	33.80	8.89	34.31	55.51	63.89	68.20	4.31	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

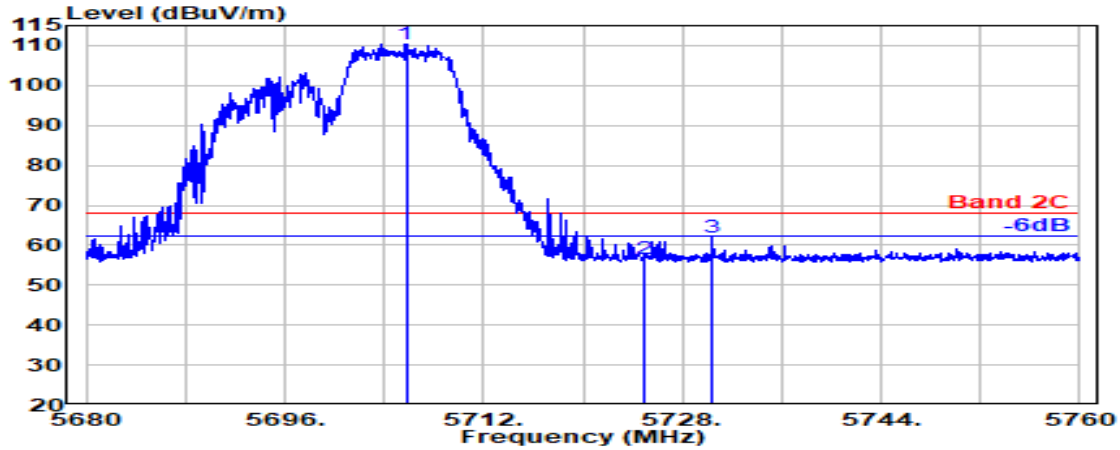

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.750	33.80	8.87	34.30	101.97	110.34	---	---	Peak
5725.000	33.80	8.88	34.31	48.24	56.62	68.20	11.58	Peak
5730.450	33.80	8.88	34.31	53.40	61.78	68.20	6.42	Peak

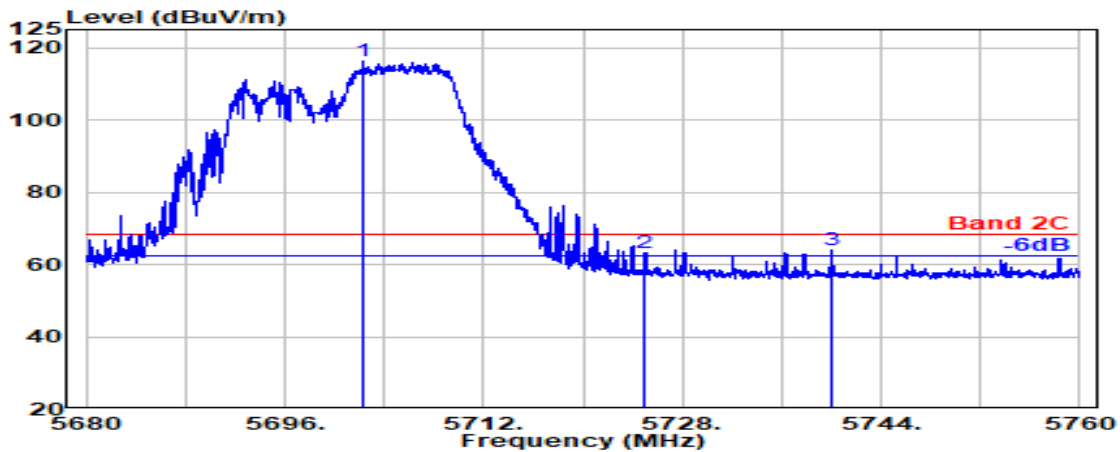


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.300	33.80	8.87	34.30	107.98	116.35	---	---	Peak
5725.000	33.80	8.88	34.31	54.81	63.18	68.20	5.02	Peak
5740.050	33.80	8.89	34.31	55.79	64.17	68.20	4.03	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

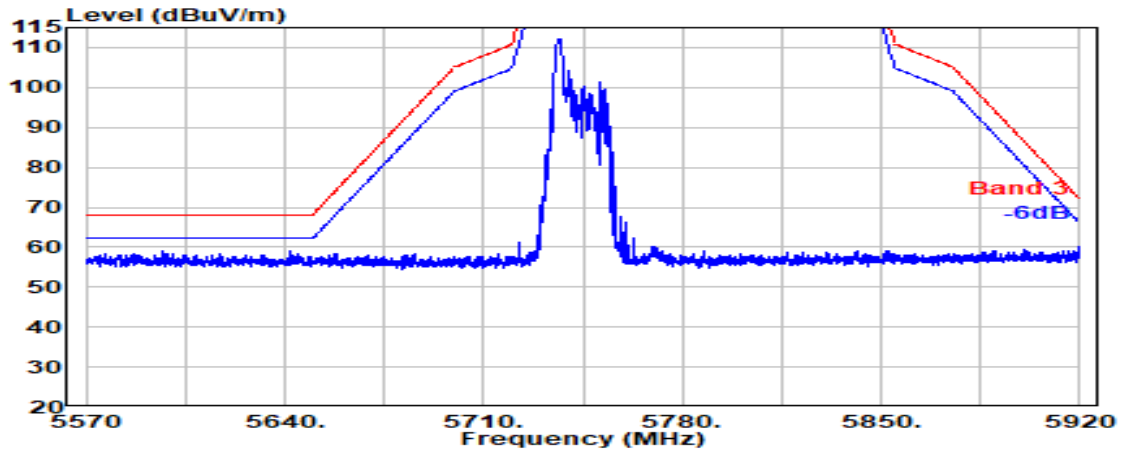


Antenna at Vertical Polarization

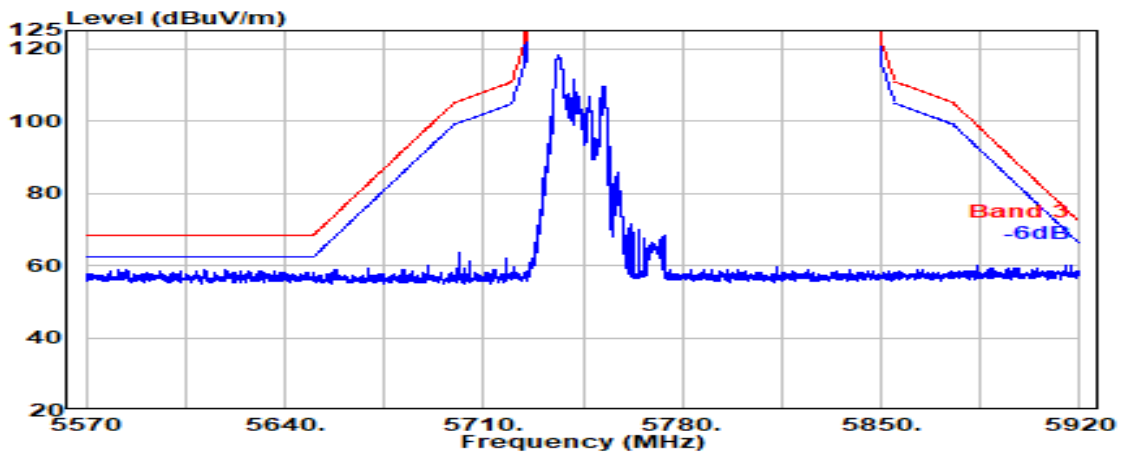


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

#### Antenna at Horizontal Polarization

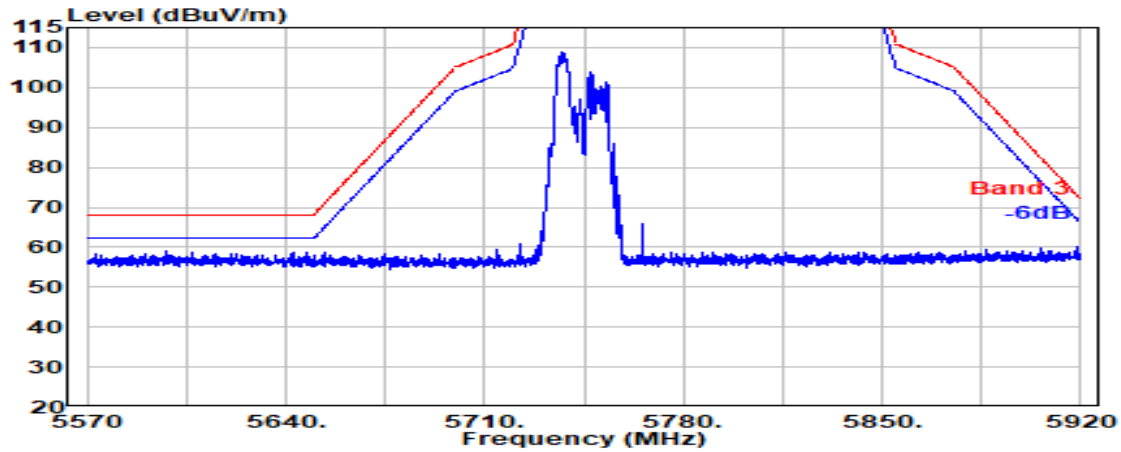


#### Antenna at Vertical Polarization

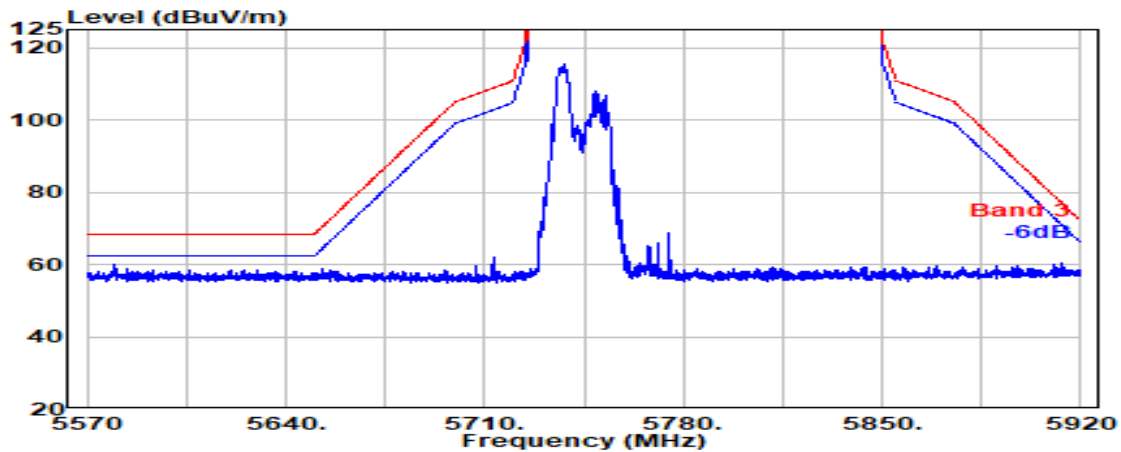




Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

#### Antenna at Horizontal Polarization

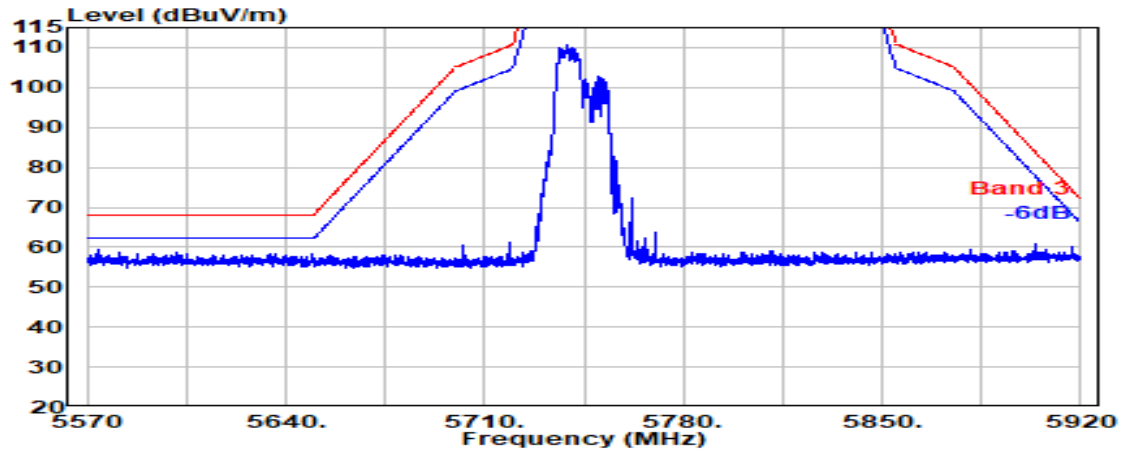


#### Antenna at Vertical Polarization

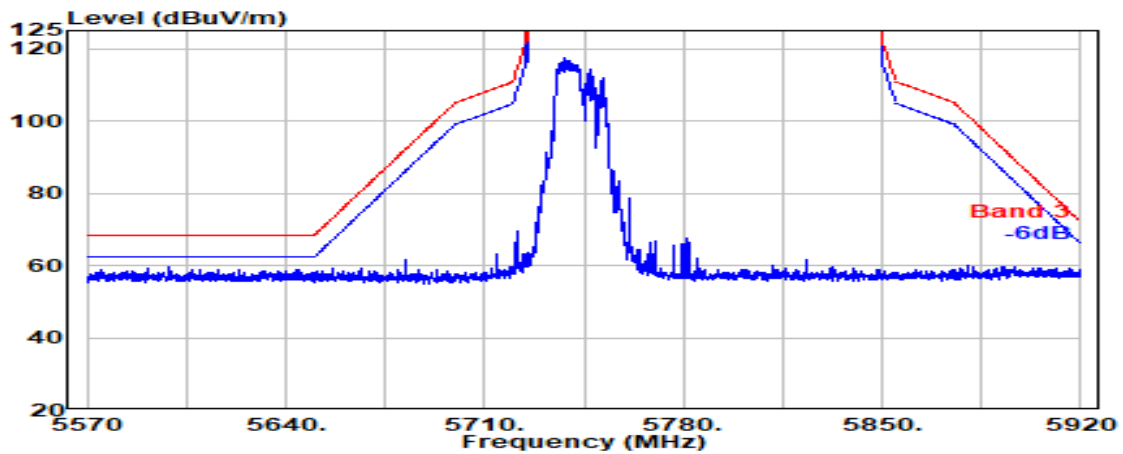


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

## Antenna at Horizontal Polarization

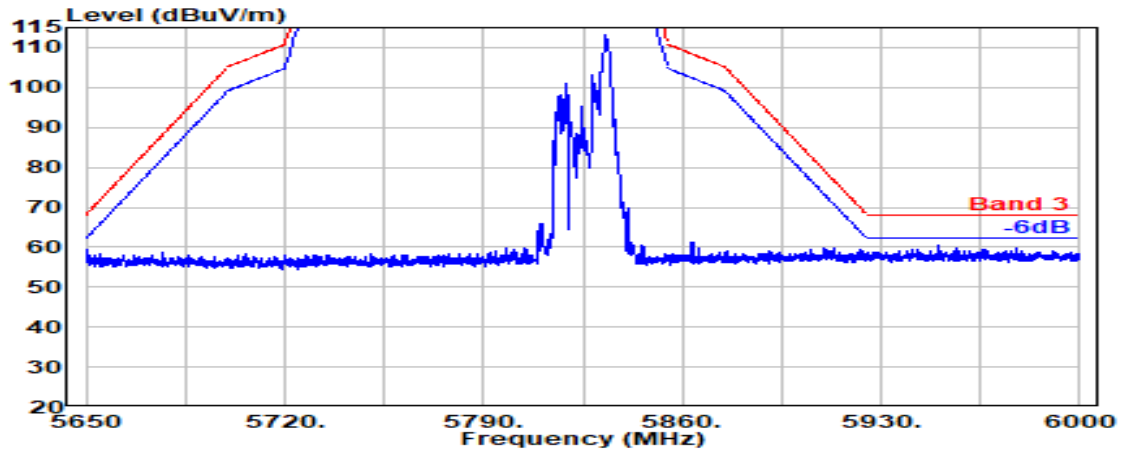


## Antenna at Vertical Polarization

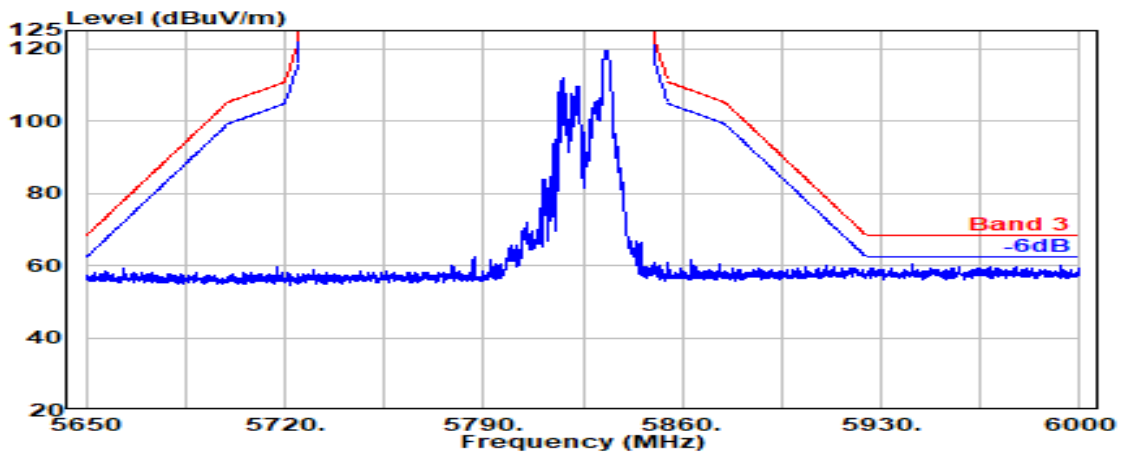


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

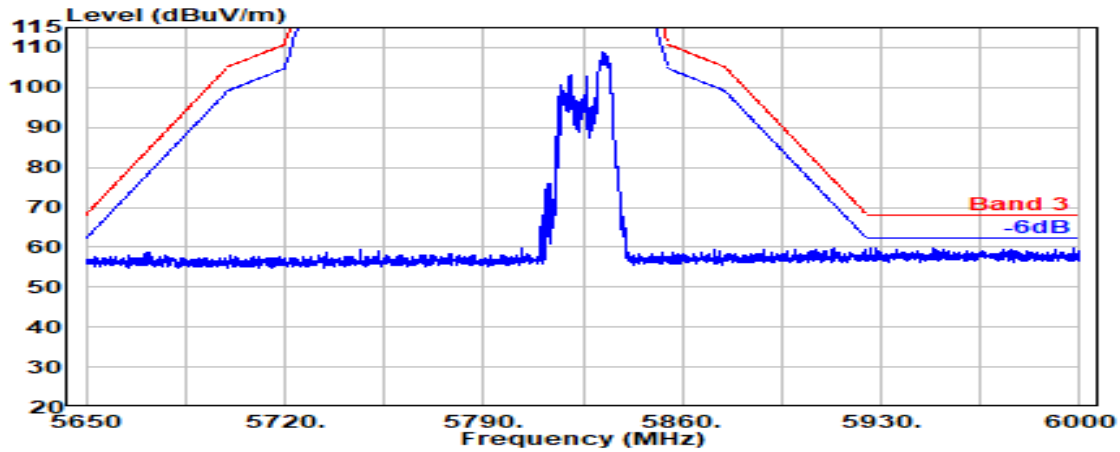


Antenna at Vertical Polarization

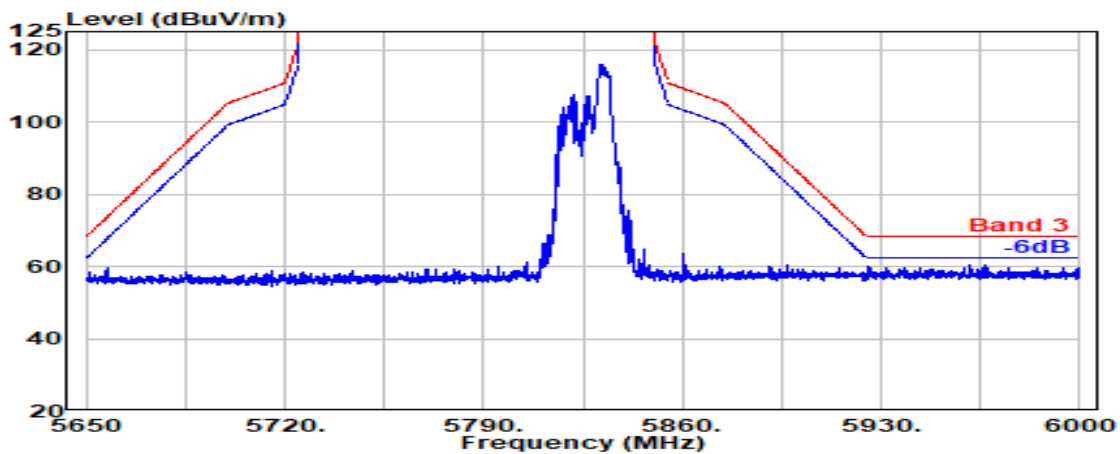


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


#### Antenna at Horizontal Polarization

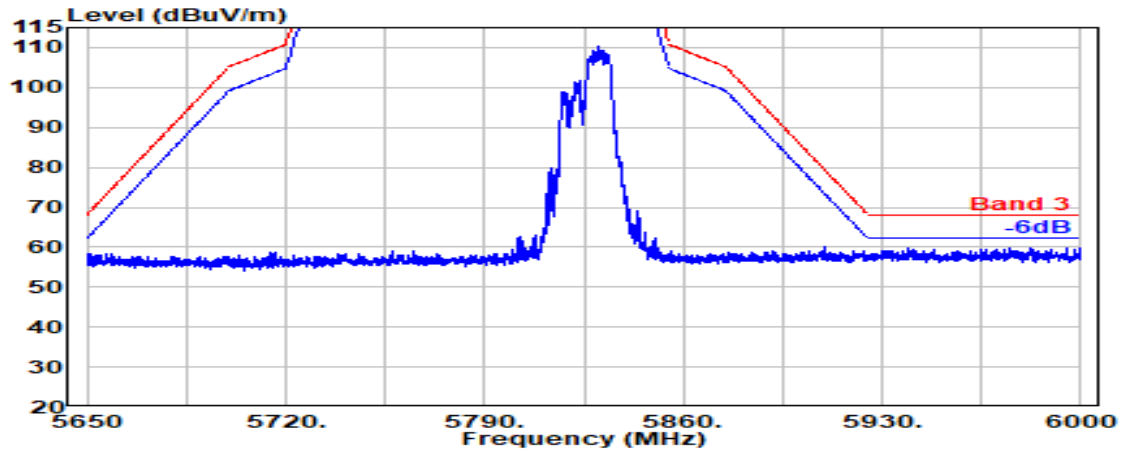

#### Antenna at Vertical Polarization

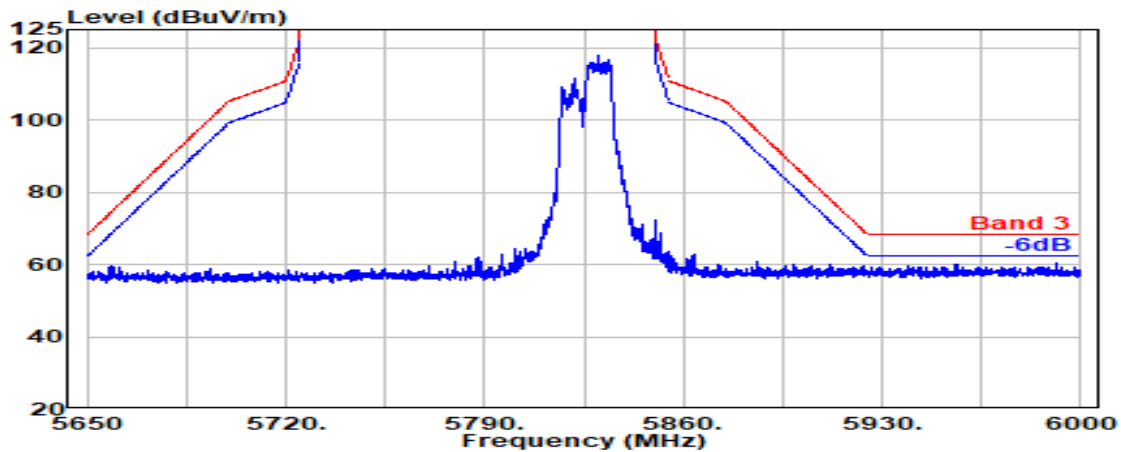


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

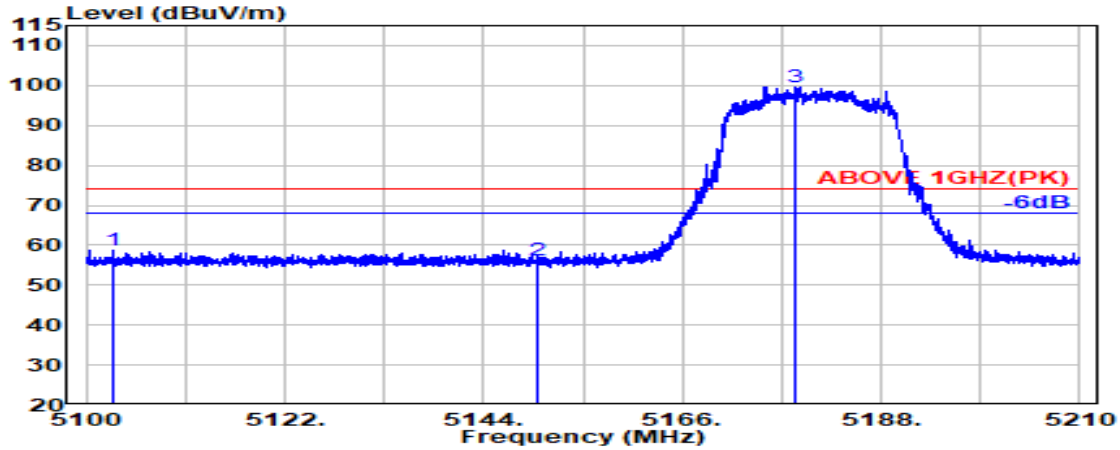

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.017	33.70	8.51	34.36	50.79	58.65	74.00	15.35	Peak
5150.000	33.70	8.54	34.34	48.35	56.25	74.00	17.75	Peak
@ 5178.477	33.70	8.56	34.33	91.76	99.70	---	---	Peak

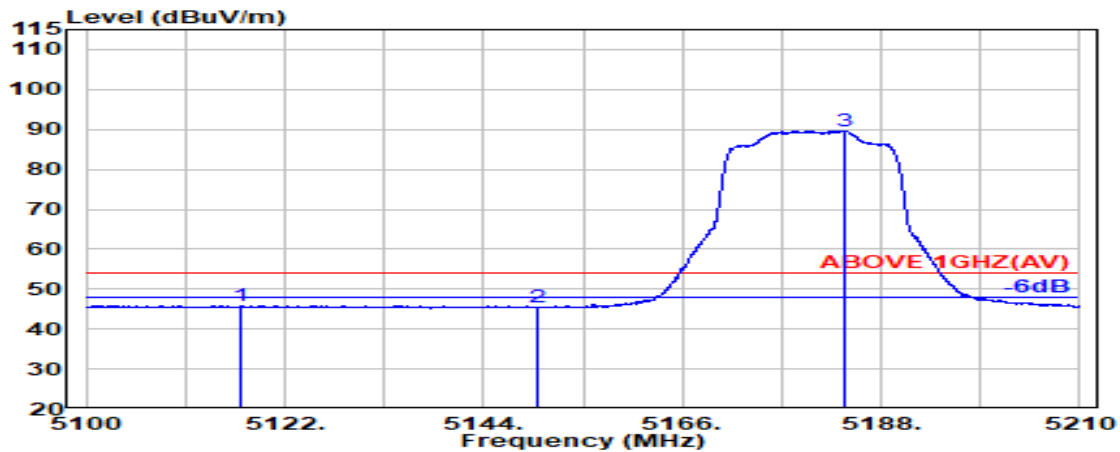


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.191	33.70	8.52	34.35	37.97	45.84	54.00	8.16	Average
5150.000	33.70	8.54	34.34	37.62	45.52	54.00	8.48	Average
@ 5184.071	33.70	8.57	34.32	81.78	89.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

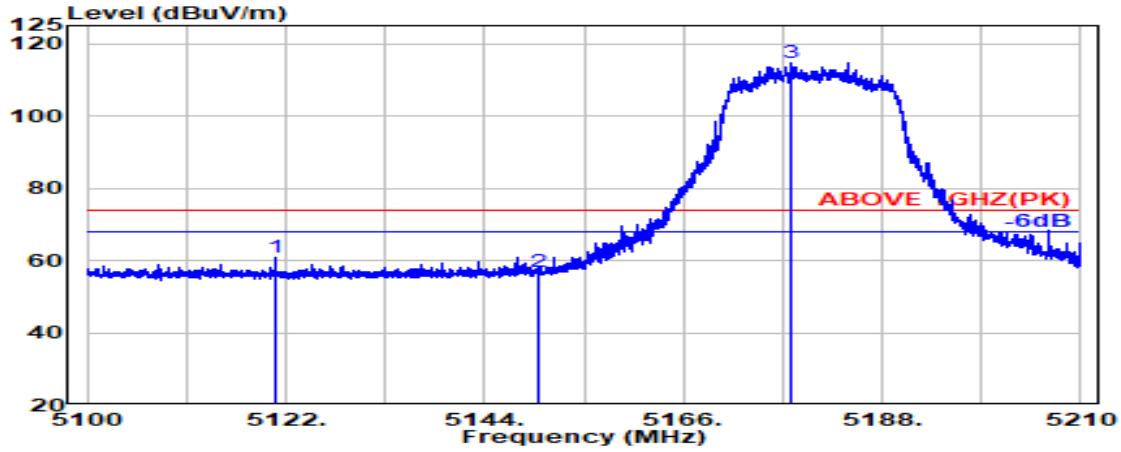

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.806	33.70	8.53	34.35	52.90	60.77	74.00	13.23	Peak
5150.000	33.70	8.54	34.34	48.94	56.85	74.00	17.15	Peak
@ 5177.880	33.70	8.56	34.33	106.87	114.81	---	---	Peak

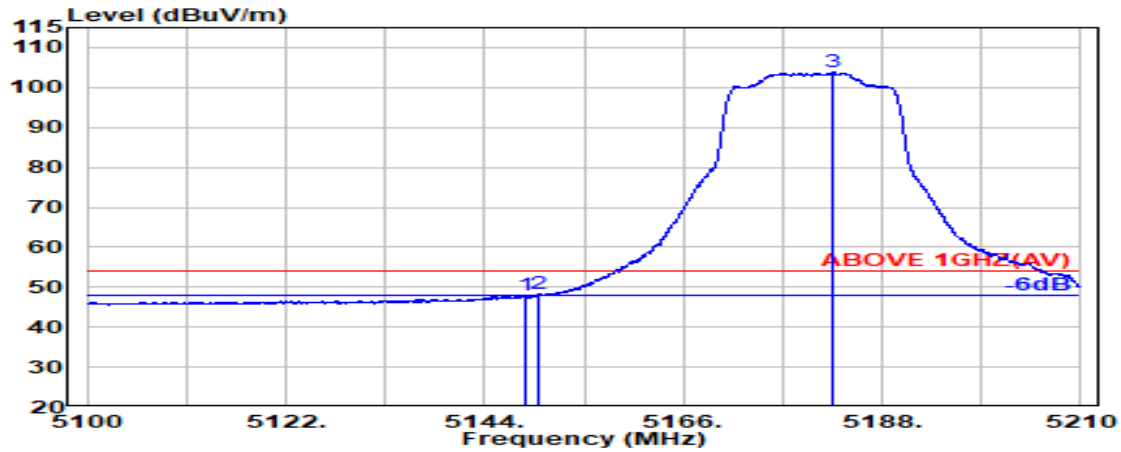


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.620	33.70	8.54	34.34	40.15	48.05	54.00	5.95	Average
5150.000	33.70	8.54	34.34	40.38	48.29	54.00	5.71	Average
@ 5182.657	33.70	8.56	34.32	95.78	103.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

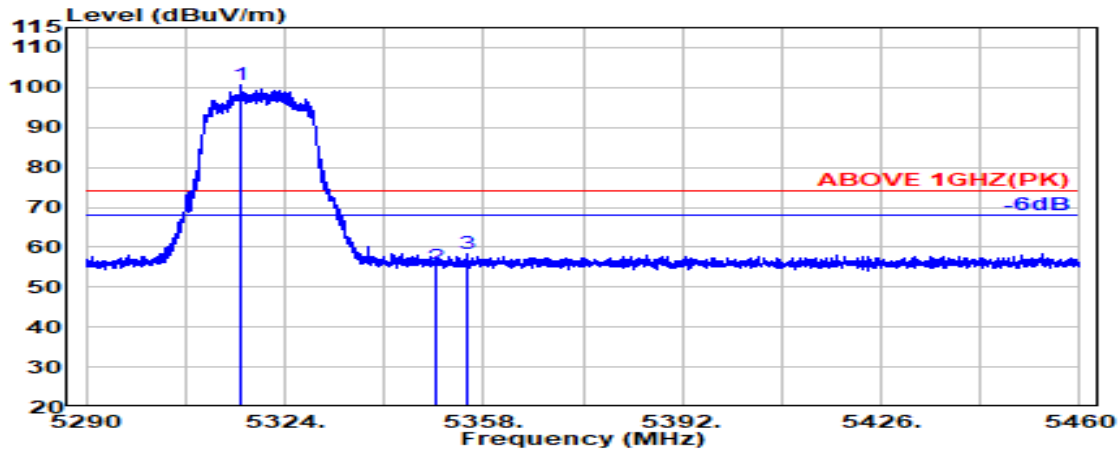

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.471	34.03	8.65	34.27	92.09	100.50	---	---	Peak
5350.000	33.90	8.67	34.26	46.80	55.11	74.00	18.89	Peak
5355.183	33.92	8.67	34.26	50.17	58.50	74.00	15.50	Peak

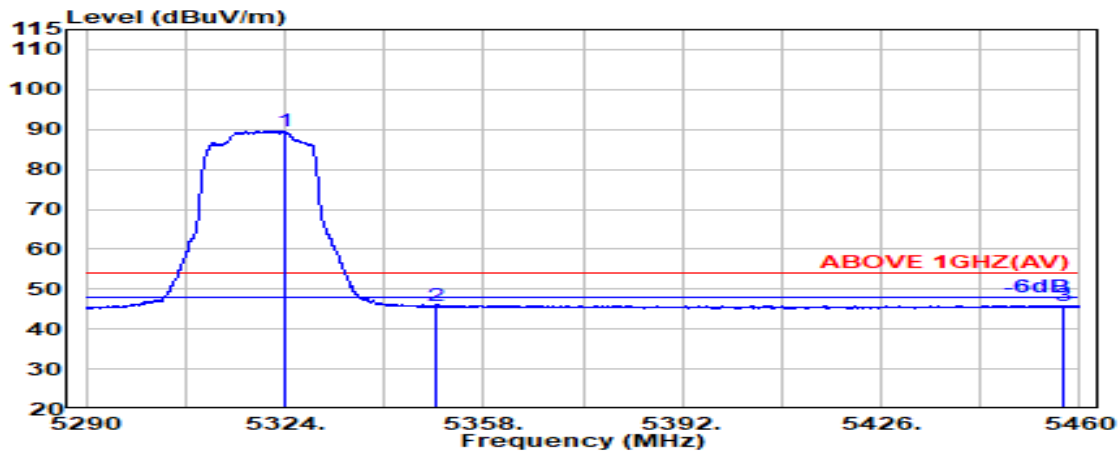


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.952	34.00	8.65	34.27	81.33	89.71	---	---	Average
5350.000	33.90	8.67	34.26	37.44	45.75	54.00	8.25	Average
5457.134	34.19	8.73	34.22	37.29	45.98	54.00	8.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

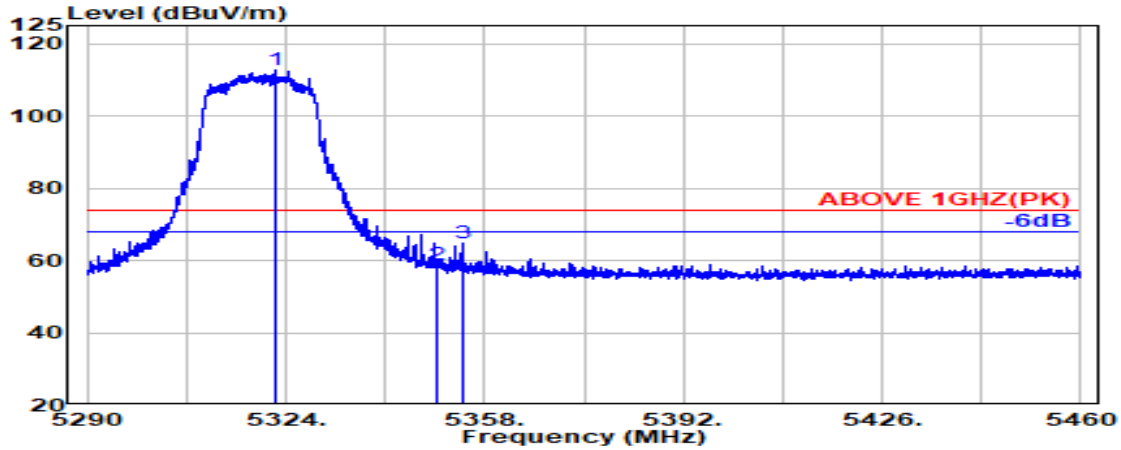

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.251	34.01	8.65	34.27	104.46	112.85	---	---	Peak
5350.000	33.90	8.67	34.26	50.53	58.84	74.00	15.16	Peak
5354.454	33.92	8.67	34.26	56.54	64.87	74.00	9.13	Peak

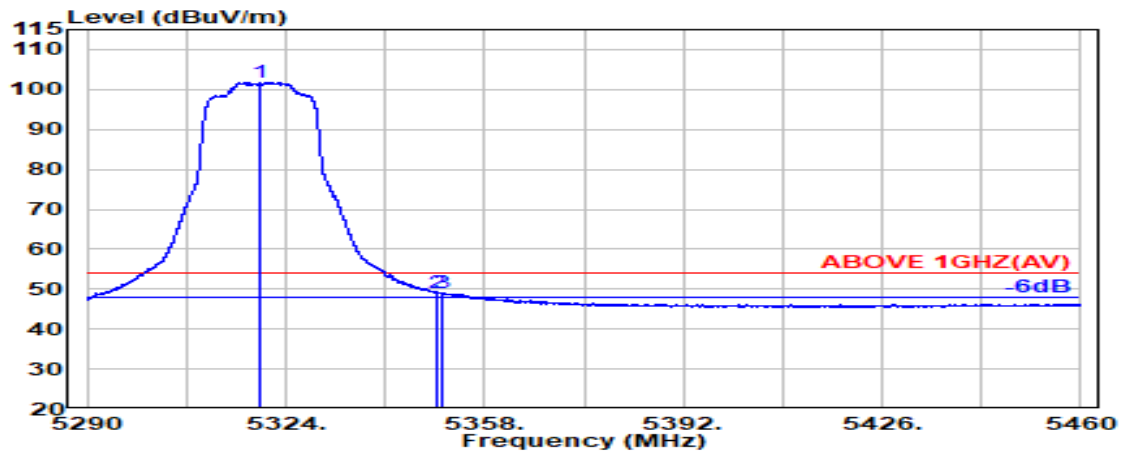


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.726	34.02	8.65	34.27	93.30	101.70	---	---	Average
5350.000	33.90	8.67	34.26	40.87	49.18	54.00	4.82	Average
5350.617	33.90	8.67	34.26	40.87	49.18	54.00	4.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

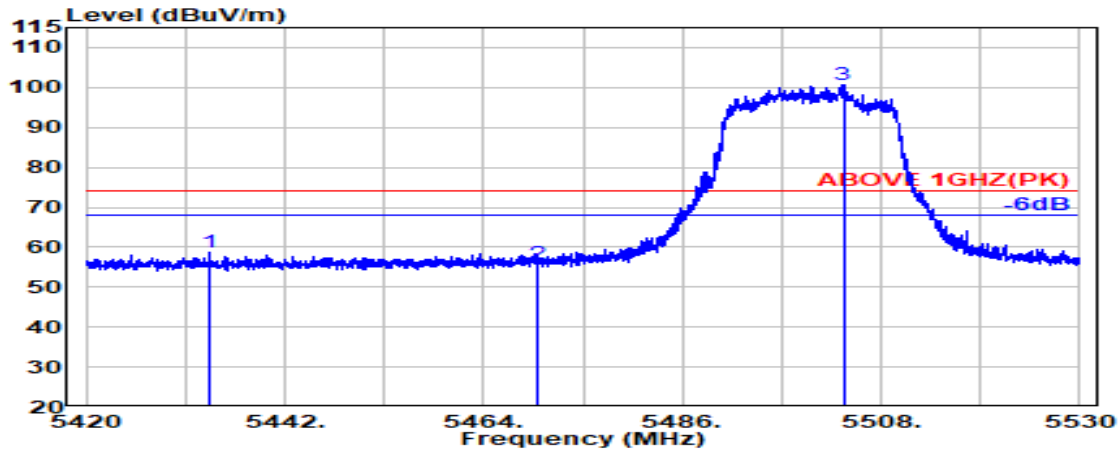

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.546	34.17	8.71	34.23	50.10	58.76	74.00	15.24	Peak
5470.000	34.16	8.74	34.21	47.26	55.95	74.00	18.05	Peak
@ 5503.820	34.10	8.76	34.20	92.02	100.68	---	---	Peak

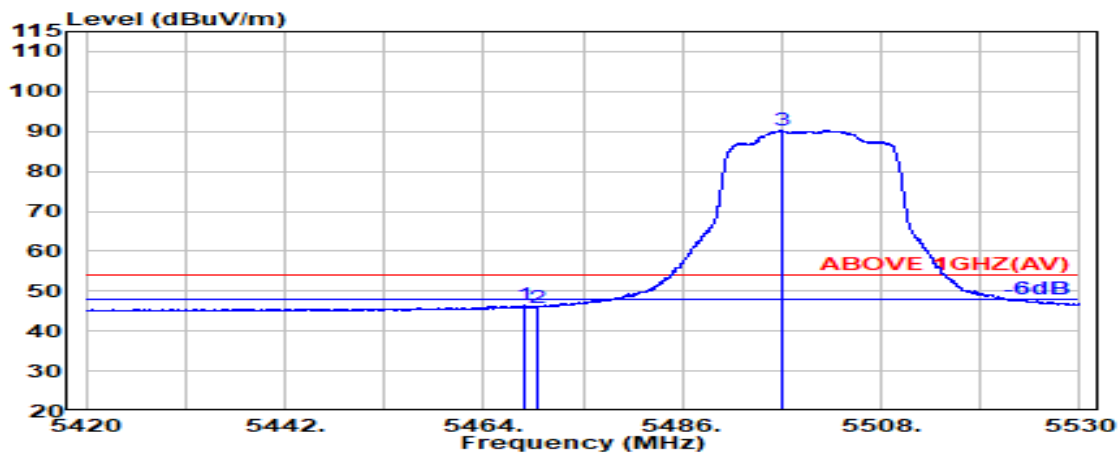


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.651	34.16	8.74	34.21	37.72	46.41	54.00	7.59	Average
5470.000	34.16	8.74	34.21	37.30	45.98	54.00	8.02	Average
@ 5497.031	34.11	8.75	34.20	81.67	90.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

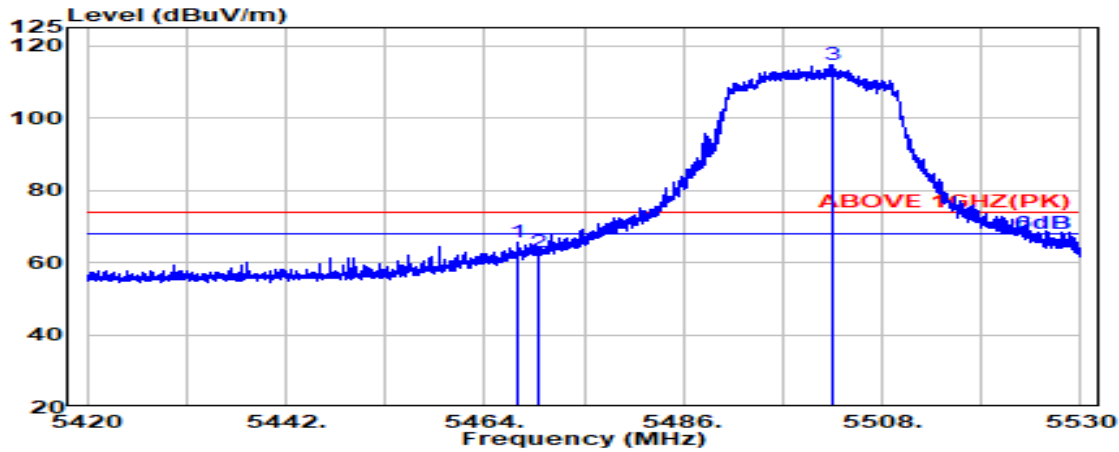

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.740	34.16	8.73	34.21	56.98	65.67	74.00	8.33	Peak
5470.000	34.16	8.74	34.21	53.96	62.65	74.00	11.35	Peak
@ 5502.531	34.10	8.75	34.20	106.18	114.84	---	---	Peak

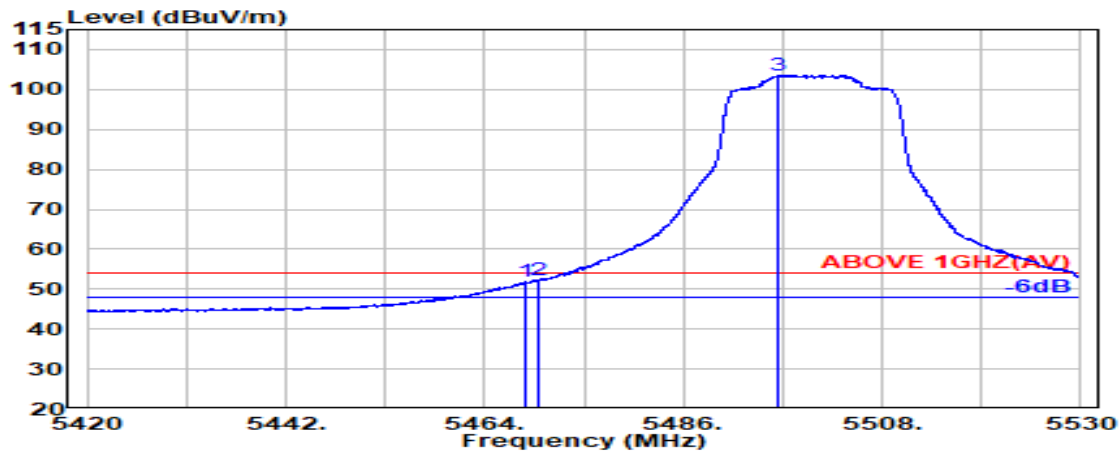


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.463	34.16	8.73	34.21	43.20	51.89	54.00	2.11	Average
5470.000	34.16	8.74	34.21	43.71	52.40	54.00	1.60	Average
@ 5496.466	34.11	8.75	34.20	94.99	103.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

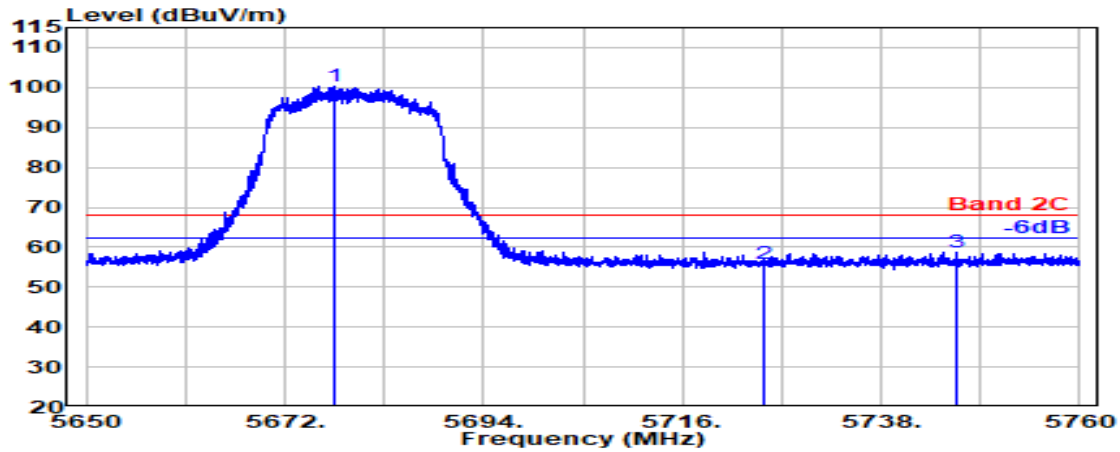

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.375	33.89	8.85	34.28	91.91	100.37	---	---	Peak
5725.000	33.80	8.88	34.31	47.31	55.68	68.20	12.52	Peak
5746.423	33.80	8.89	34.32	50.35	58.73	68.20	9.47	Peak

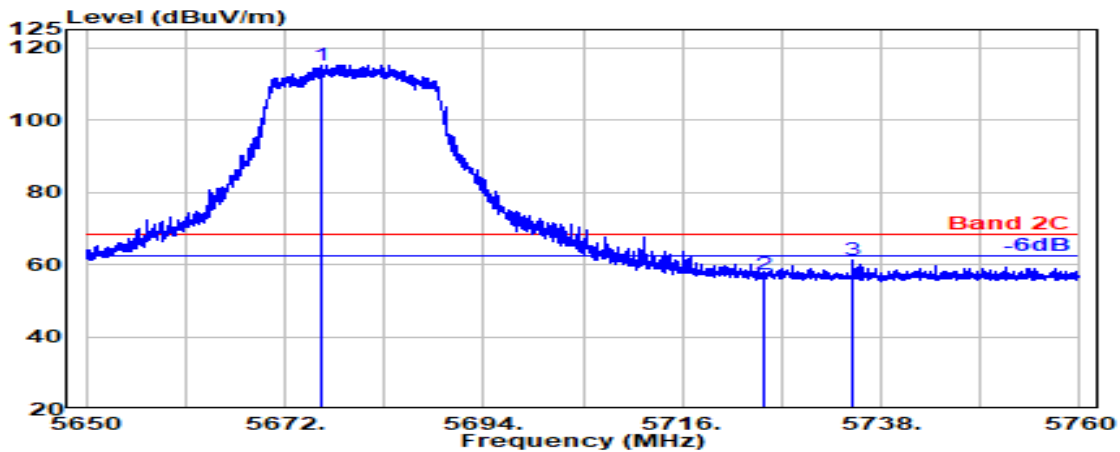


#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.117	33.90	8.85	34.28	106.77	115.23	---	---	Peak
5725.000	33.80	8.88	34.31	48.84	57.22	68.20	10.98	Peak
5734.920	33.80	8.89	34.31	52.95	61.32	68.20	6.88	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

## Antenna at Horizontal Polarization

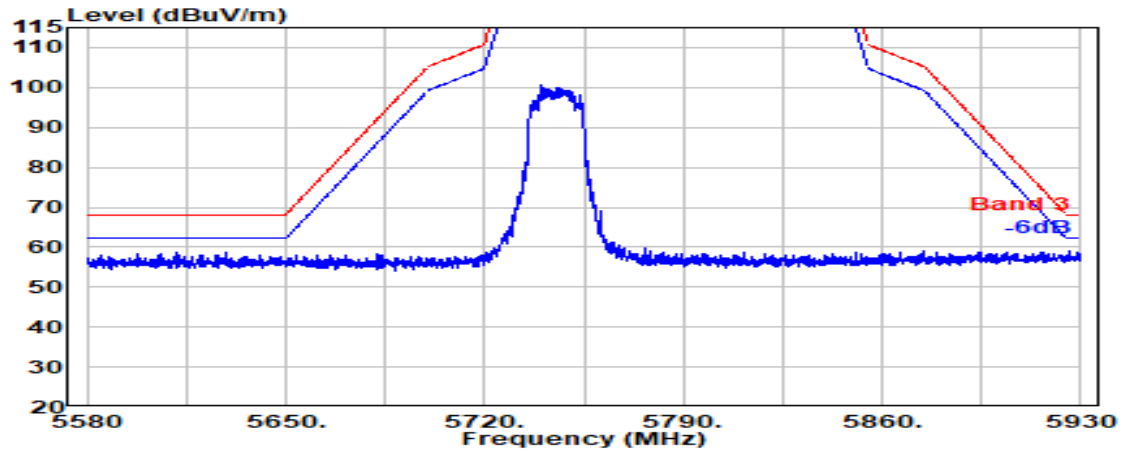


## Antenna at Vertical Polarization

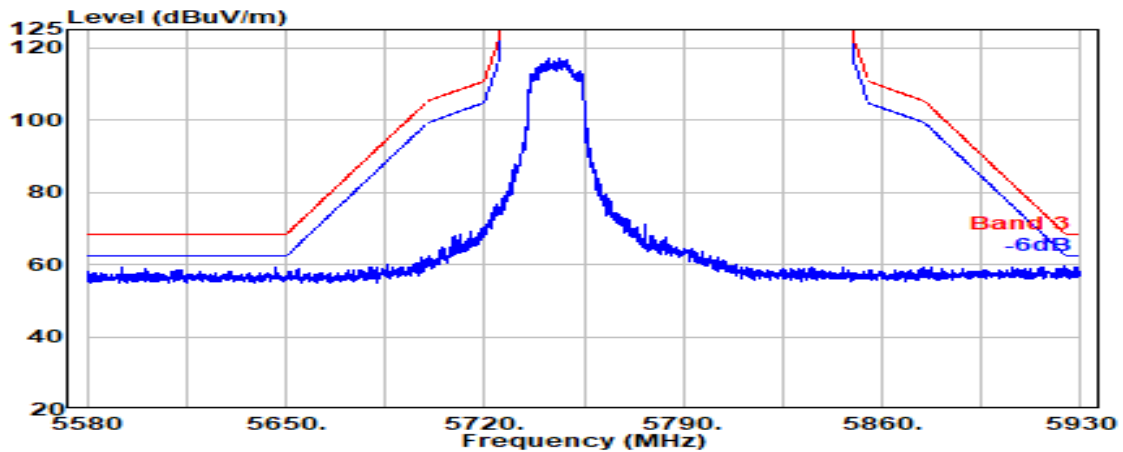


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


#### Antenna at Horizontal Polarization

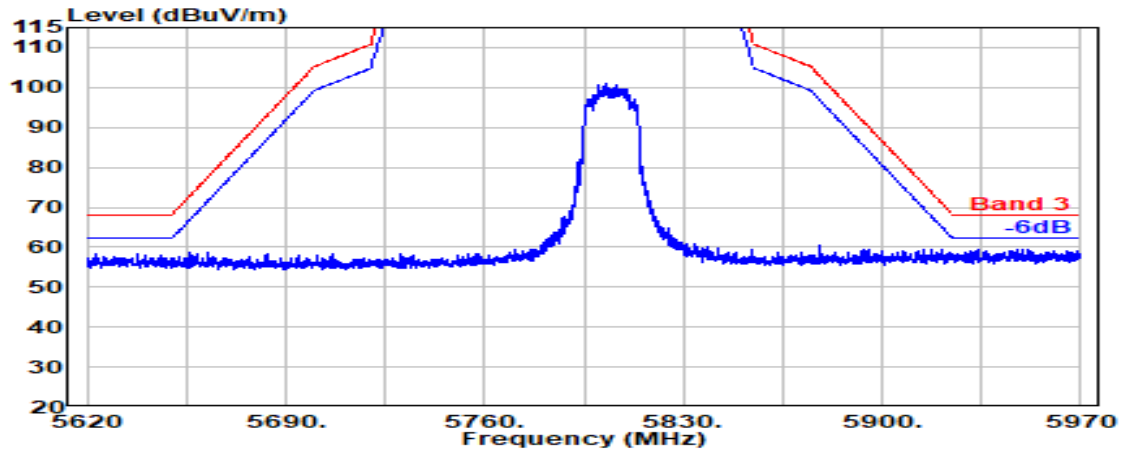

#### Antenna at Vertical Polarization

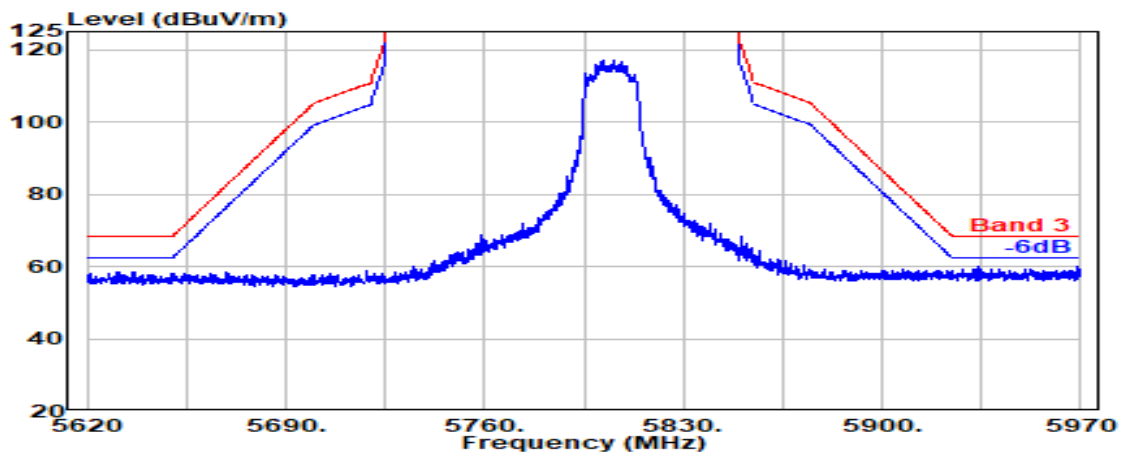


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

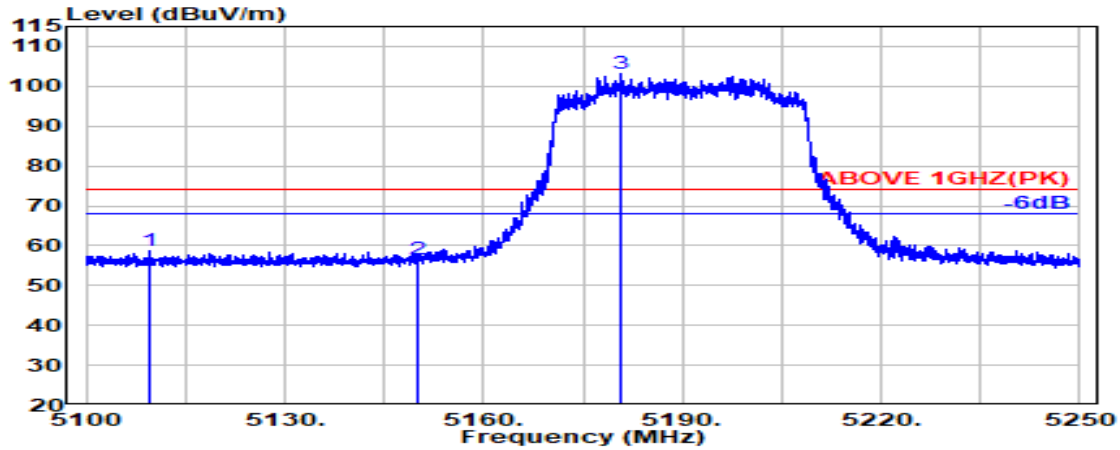

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.600	33.70	8.52	34.35	50.72	58.59	74.00	15.41	Peak
5150.000	33.70	8.54	34.34	48.66	56.56	74.00	17.44	Peak
@ 5180.614	33.70	8.56	34.33	95.22	103.16	---	---	Peak

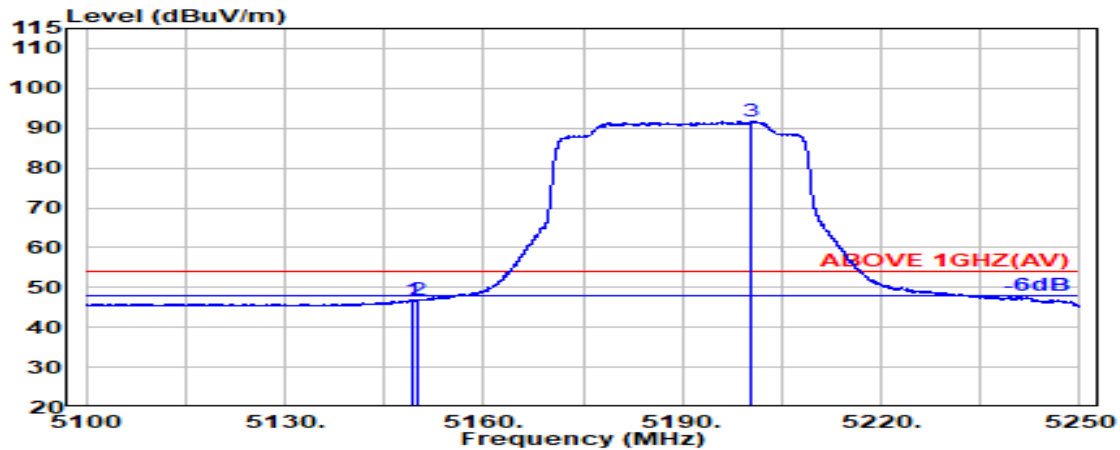


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.372	33.70	8.54	34.34	39.02	46.93	54.00	7.07	Average
5150.000	33.70	8.54	34.34	38.90	46.81	54.00	7.19	Average
@ 5200.500	33.70	8.58	34.32	83.67	91.63	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

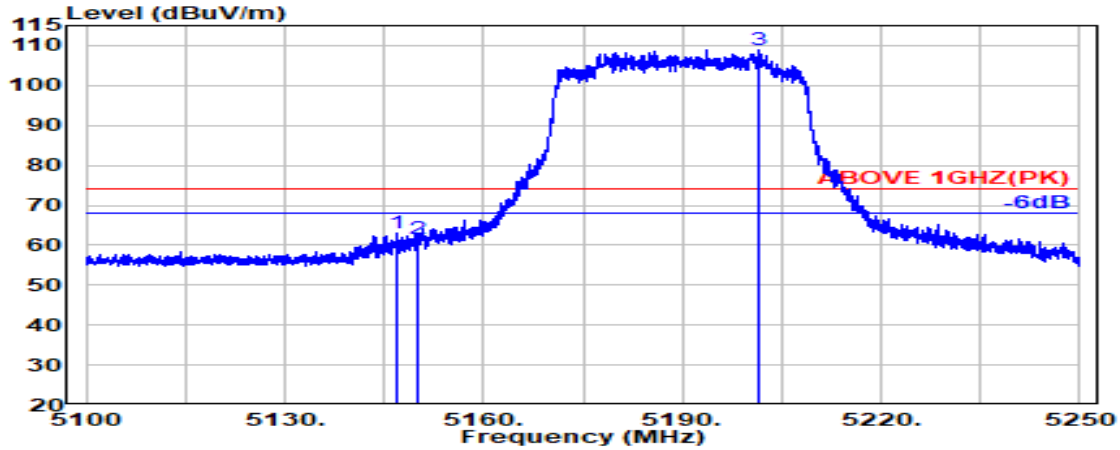

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.757	33.70	8.54	34.34	54.97	62.87	74.00	11.13	Peak
5150.000	33.70	8.54	34.34	53.83	61.74	74.00	12.26	Peak
@ 5201.700	33.70	8.58	34.32	100.81	108.77	---	---	Peak

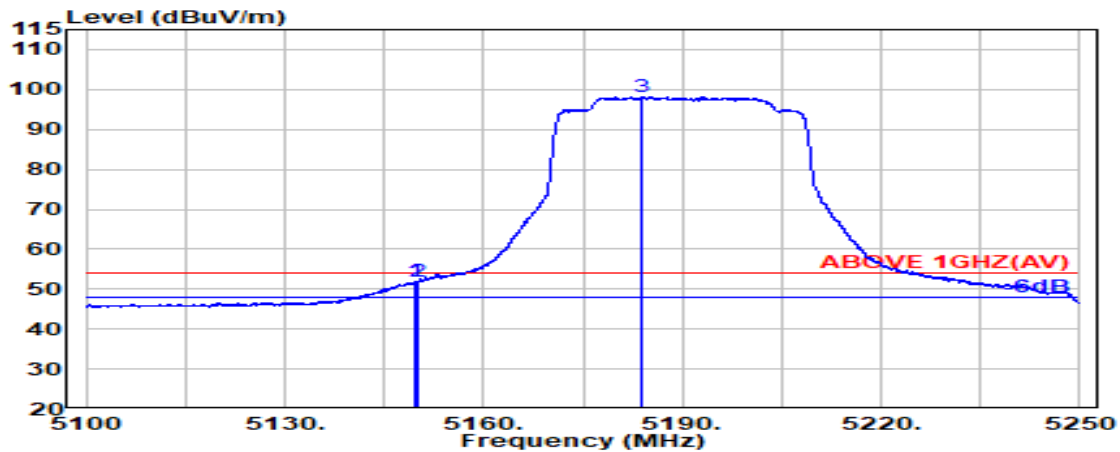


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.714	33.70	8.54	34.34	43.98	51.89	54.00	2.11	Average
5150.000	33.70	8.54	34.34	44.09	52.00	54.00	2.00	Average
@ 5183.914	33.70	8.56	34.32	90.24	98.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

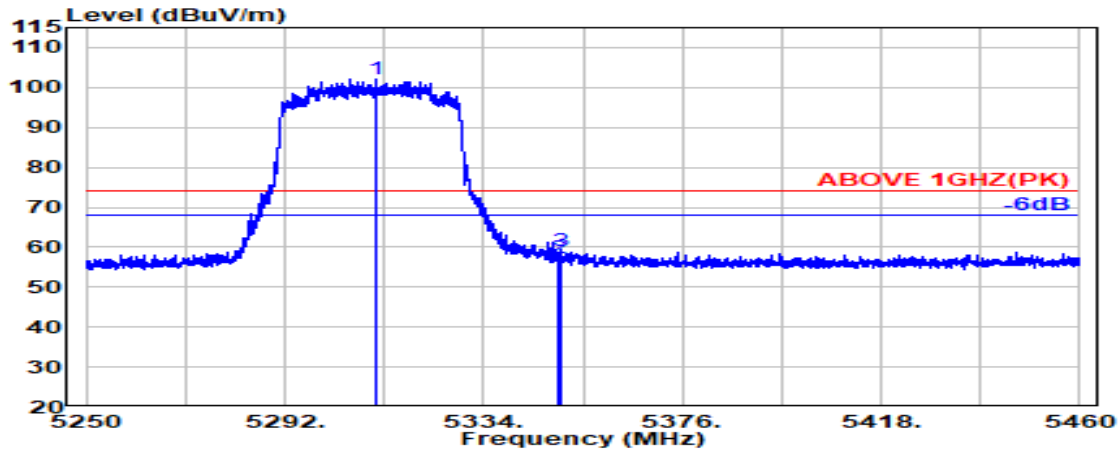

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.260	34.05	8.64	34.27	93.65	102.07	---	---	Peak
5350.000	33.90	8.67	34.26	48.94	57.25	74.00	16.75	Peak
5350.560	33.90	8.67	34.26	50.93	59.24	74.00	14.76	Peak

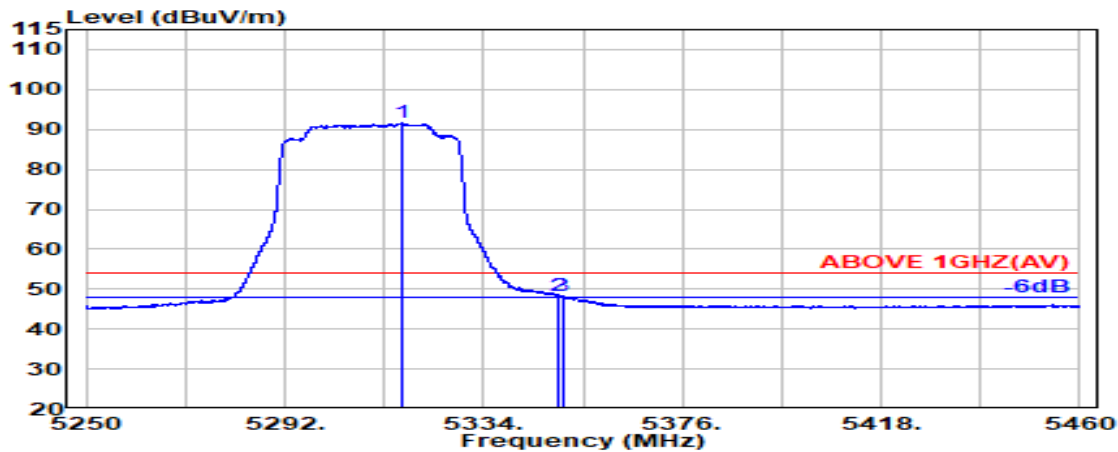


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.720	34.03	8.65	34.27	83.13	91.54	---	---	Average
5350.000	33.90	8.67	34.26	40.10	48.41	54.00	5.59	Average
5350.620	33.90	8.67	34.26	40.08	48.39	54.00	5.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

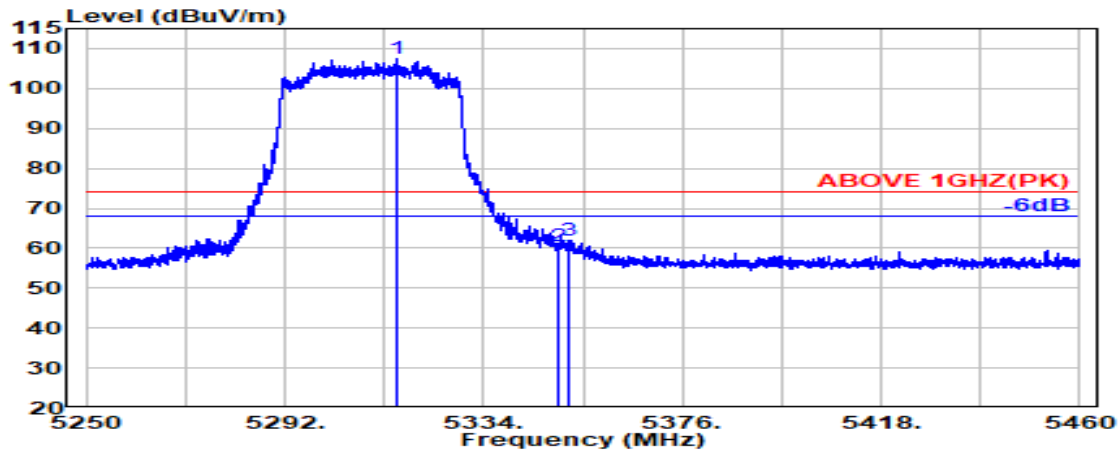

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5315.760	34.04	8.64	34.27	99.07	107.48	---	---	Peak
5350.000	33.90	8.67	34.26	52.35	60.66	74.00	13.34	Peak
5352.240	33.91	8.67	34.26	53.79	62.10	74.00	11.90	Peak

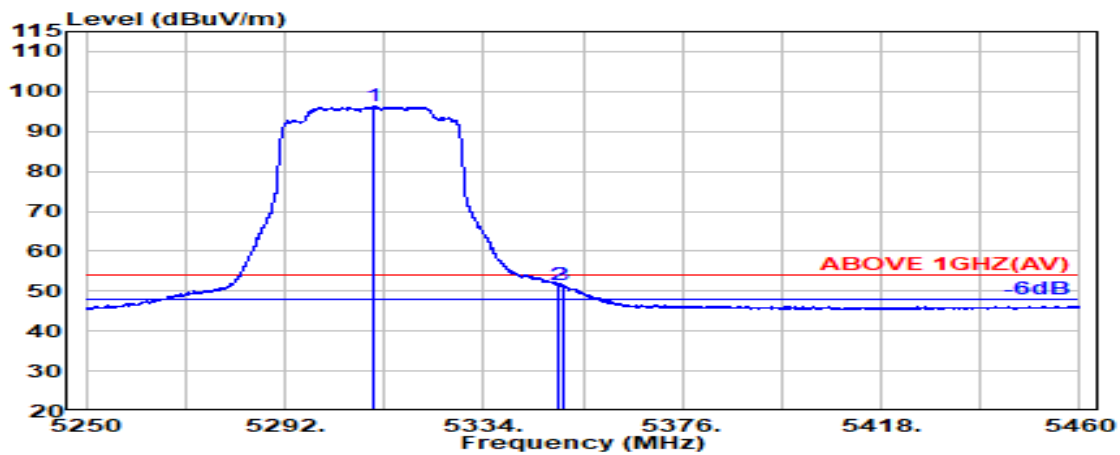


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5310.960	34.06	8.64	34.27	87.95	96.38	---	---	Average
5350.000	33.90	8.67	34.26	43.21	51.51	54.00	2.49	Average
5350.620	33.90	8.67	34.26	43.12	51.43	54.00	2.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

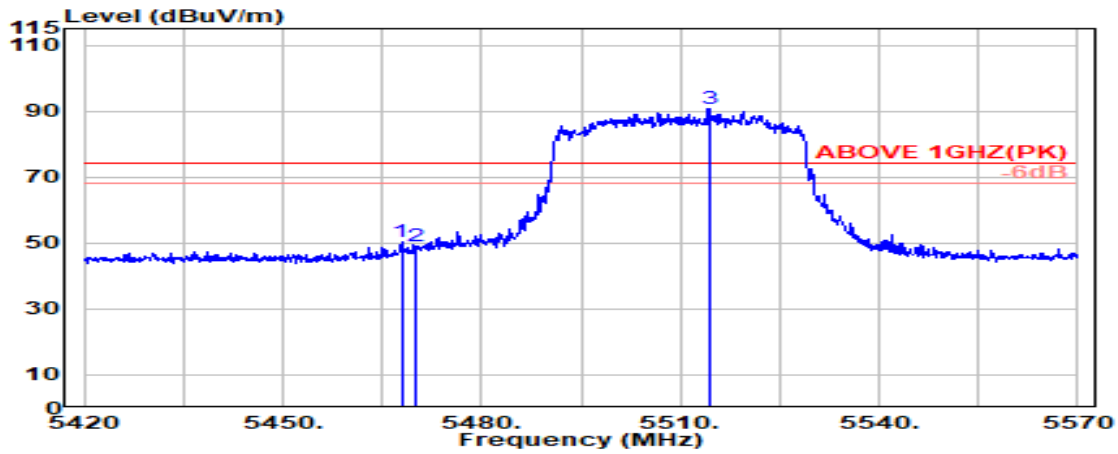

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	9.06	34.12	41.45	50.42	74.00	23.58	Peak
5470.000	34.04	9.06	34.12	39.89	48.87	74.00	25.13	Peak
@ 5514.300	34.07	9.08	34.12	81.85	90.89	---	---	Peak

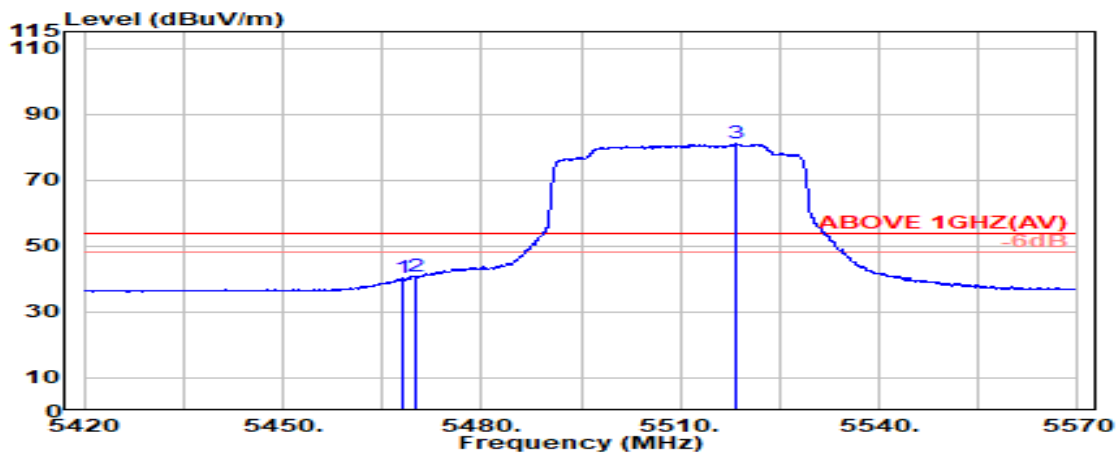


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	9.06	34.12	31.31	40.28	54.00	13.72	Average
5470.000	34.04	9.06	34.12	31.70	40.68	54.00	13.32	Average
@ 5518.500	34.06	9.09	34.12	71.99	81.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

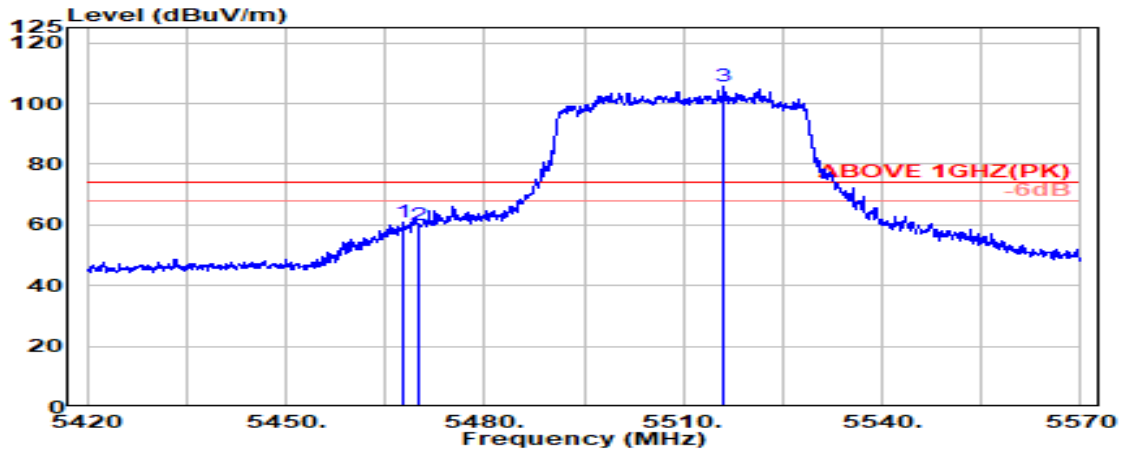

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.700	34.04	9.06	34.12	51.80	60.78	74.00	13.22	Peak
5470.000	34.04	9.06	34.12	50.95	59.93	74.00	14.07	Peak
@ 5516.100	34.07	9.09	34.12	96.57	105.61	---	---	Peak

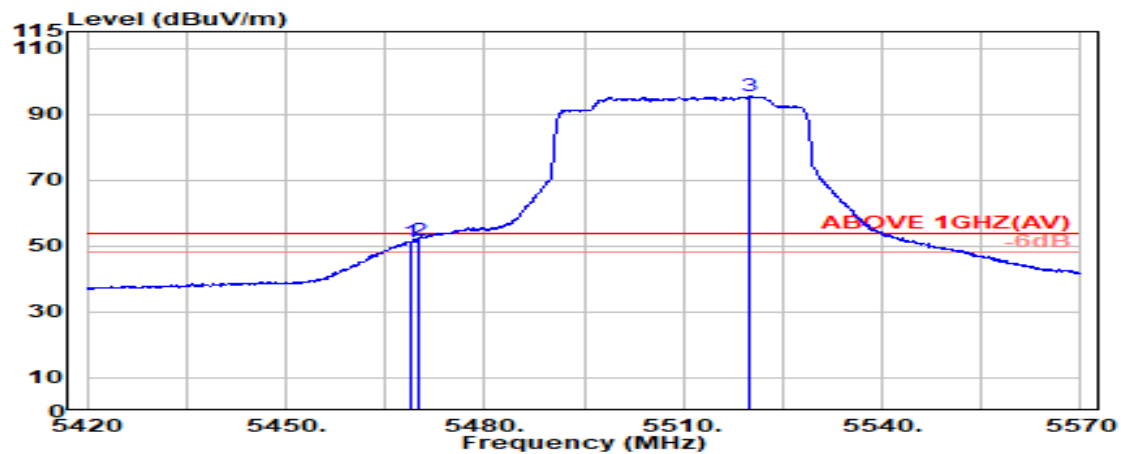


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.04	9.06	34.12	42.36	51.33	54.00	2.67	Average
5470.000	34.04	9.06	34.12	42.70	51.68	54.00	2.32	Average
@ 5520.100	34.06	9.09	34.12	86.51	95.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

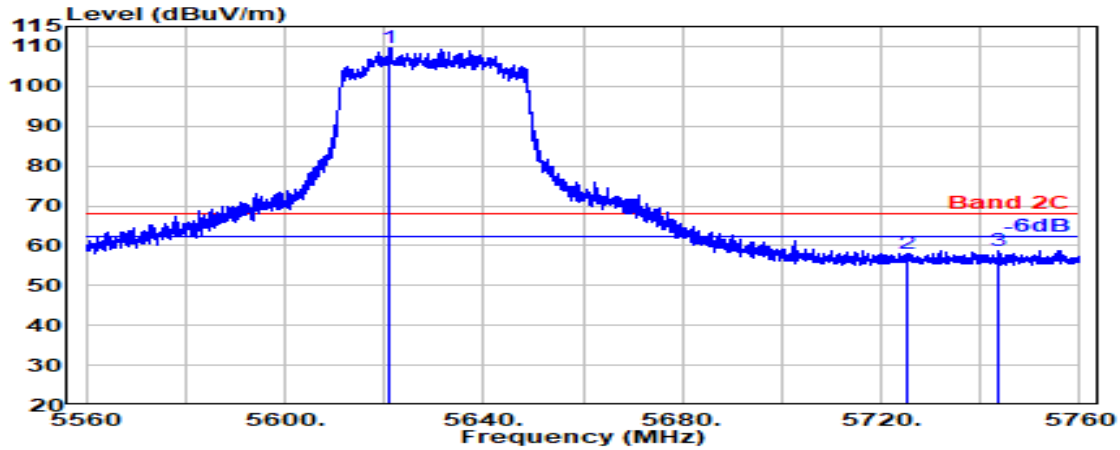

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5621.200	34.00	8.82	34.26	101.03	109.59	---	---	Peak
5725.000	33.80	8.88	34.31	49.55	57.92	68.20	10.28	Peak
5743.600	33.80	8.89	34.31	50.48	58.85	68.20	9.35	Peak

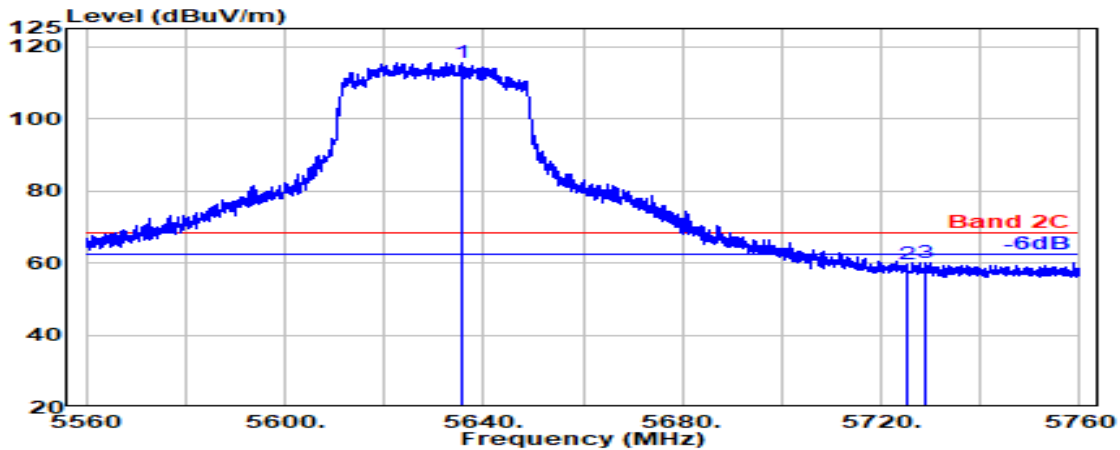


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5635.543	34.00	8.83	34.26	106.94	115.51	---	---	Peak
5725.000	33.80	8.88	34.31	51.29	59.66	68.20	8.54	Peak
5729.086	33.80	8.88	34.31	51.84	60.21	68.20	7.99	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

#### Antenna at Horizontal Polarization

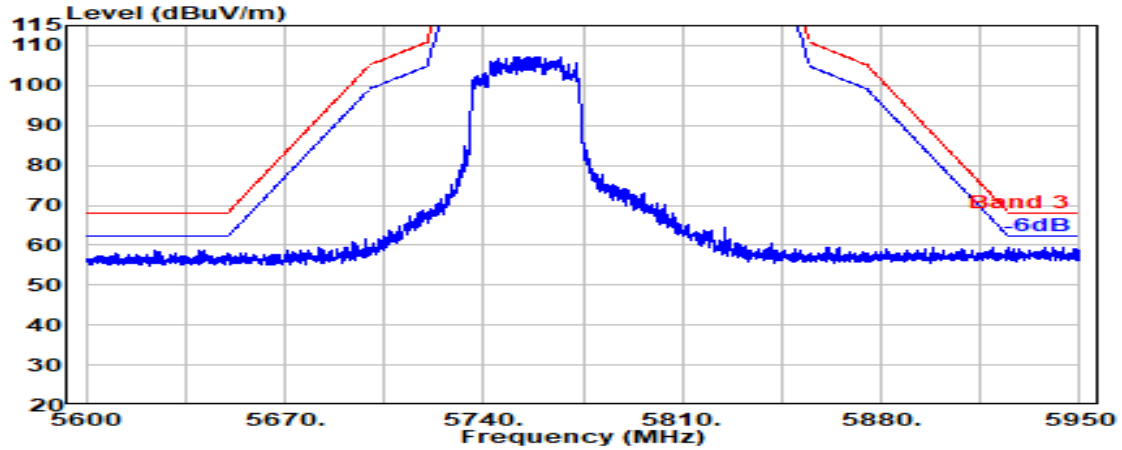


#### Antenna at Vertical Polarization

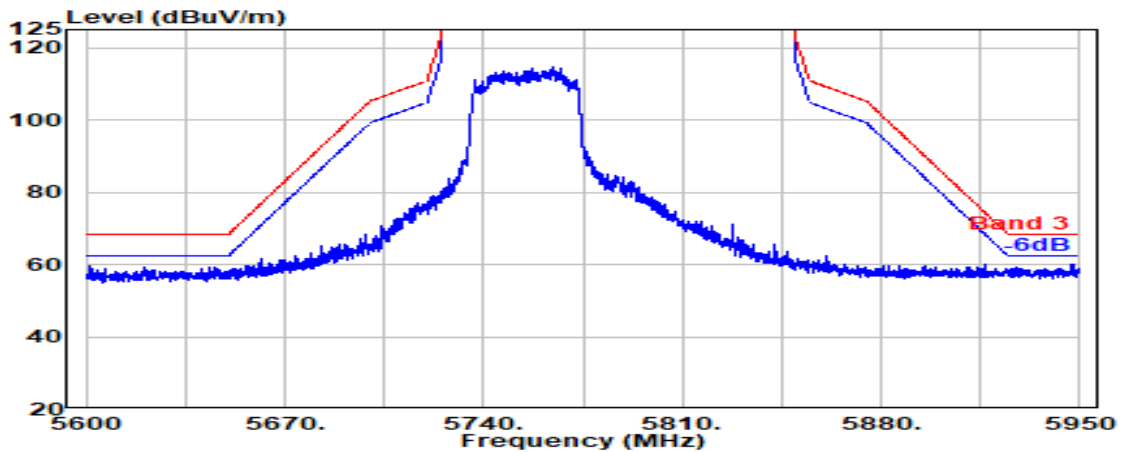


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


#### Antenna at Horizontal Polarization

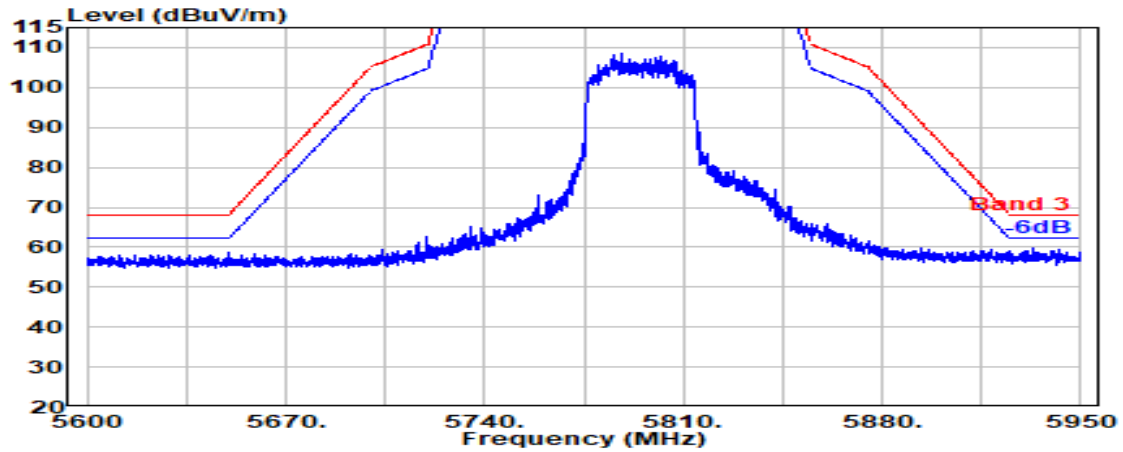

#### Antenna at Vertical Polarization

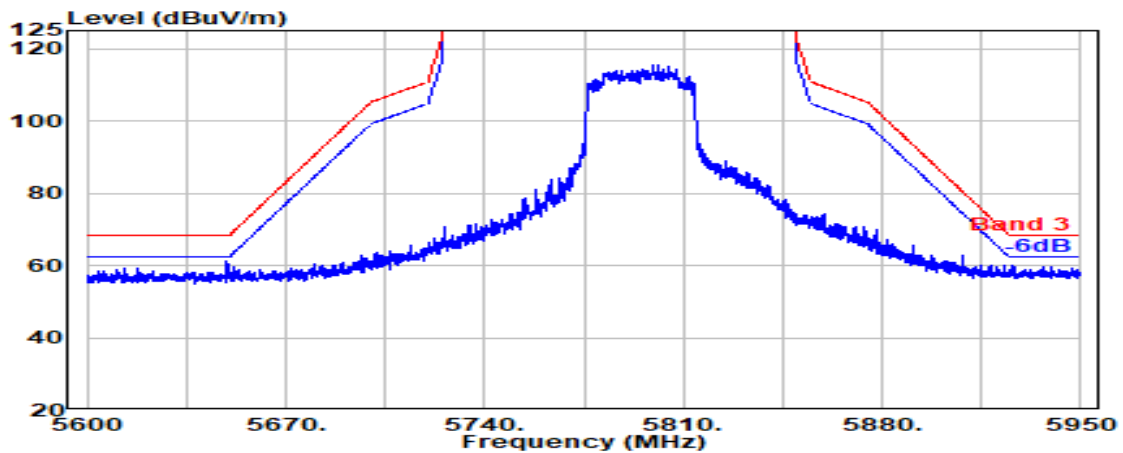


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

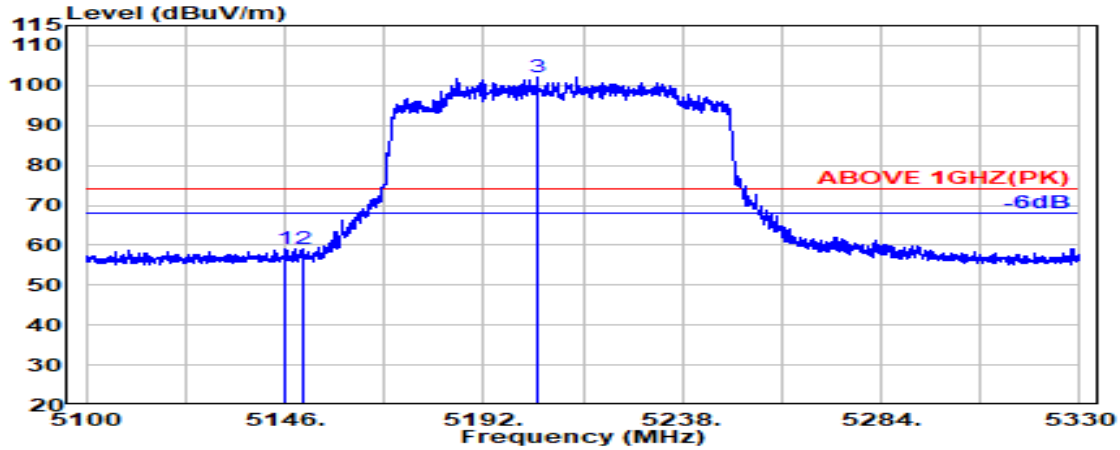

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	33.70	8.54	34.34	51.32	59.22	74.00	14.78	Peak
5150.000	33.70	8.54	34.34	51.04	58.95	74.00	15.05	Peak
@ 5204.400	33.71	8.58	34.32	94.11	102.08	---	---	Peak

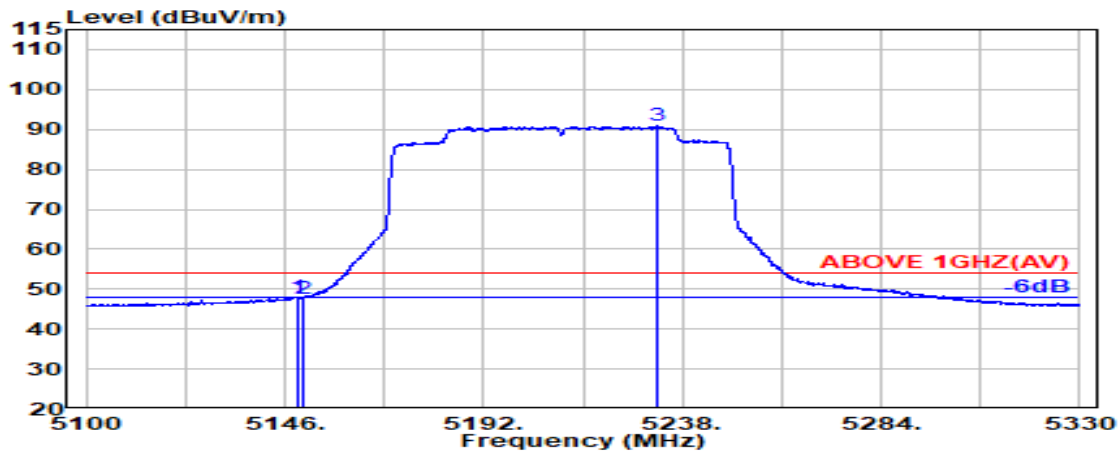


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.70	8.54	34.34	40.08	47.99	54.00	6.01	Average
5150.000	33.70	8.54	34.34	39.84	47.75	54.00	6.25	Average
@ 5231.900	33.76	8.59	34.30	82.86	90.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

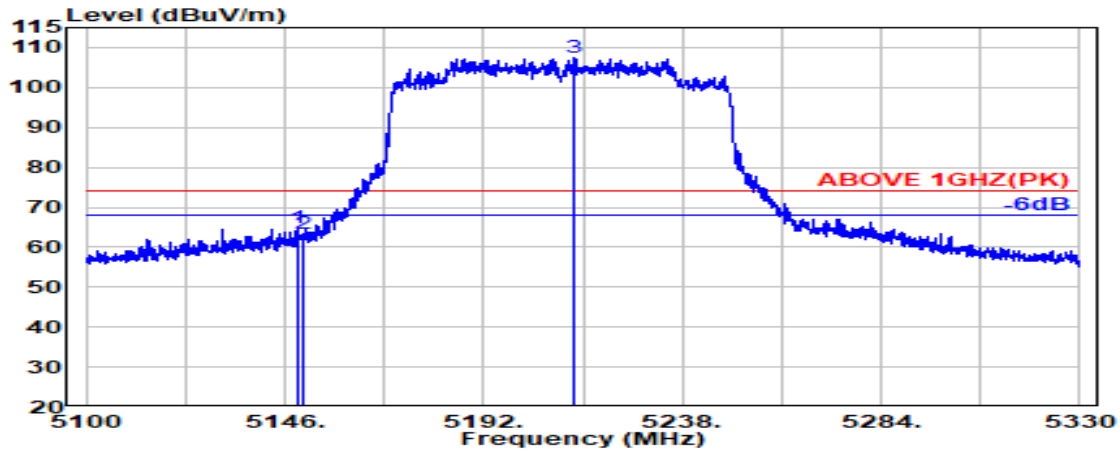

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.300	33.70	8.54	34.34	56.82	64.73	74.00	9.27	Peak
5150.000	33.70	8.54	34.34	55.65	63.56	74.00	10.44	Peak
@ 5213.100	33.73	8.58	34.31	99.65	107.65	---	---	Peak

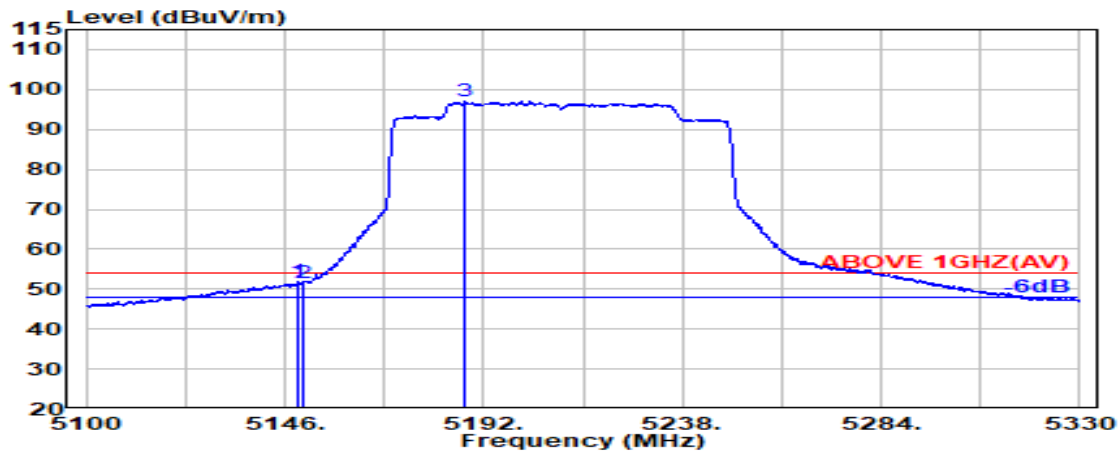


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.300	33.70	8.54	34.34	43.87	51.78	54.00	2.22	Average
5150.000	33.70	8.54	34.34	43.65	51.56	54.00	2.44	Average
@ 5187.600	33.70	8.57	34.32	89.06	97.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

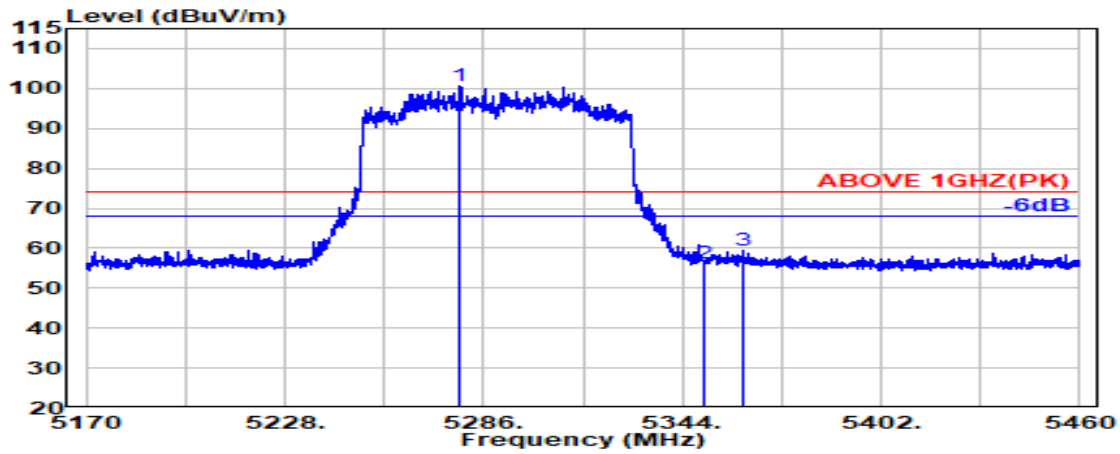

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.200	33.98	8.62	34.29	92.40	100.71	---	---	Peak
5350.000	33.90	8.67	34.26	47.73	56.03	74.00	17.97	Peak
5361.500	33.95	8.67	34.25	51.13	59.50	74.00	14.50	Peak

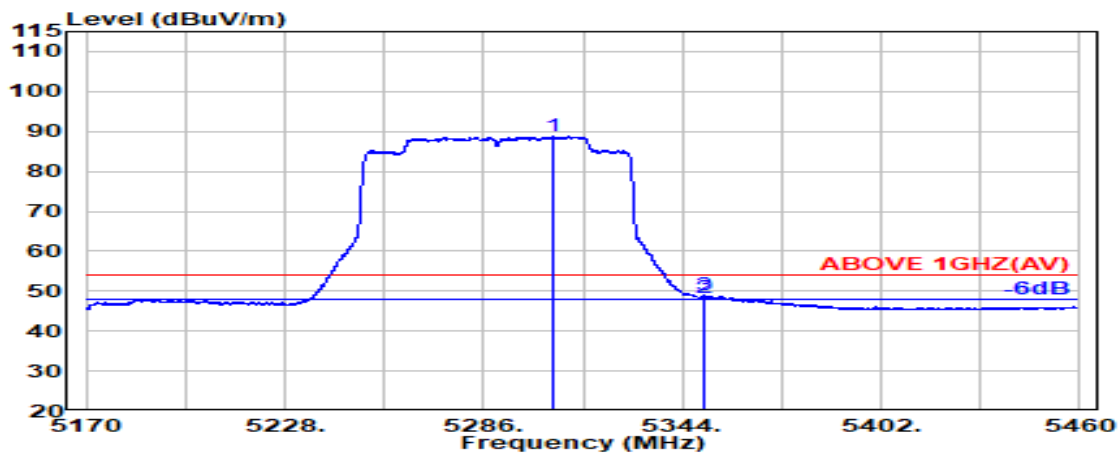


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.100	34.08	8.64	34.28	80.37	88.81	---	---	Average
5350.000	33.90	8.67	34.26	40.08	48.39	54.00	5.61	Average
5350.300	33.90	8.67	34.26	40.59	48.89	54.00	5.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

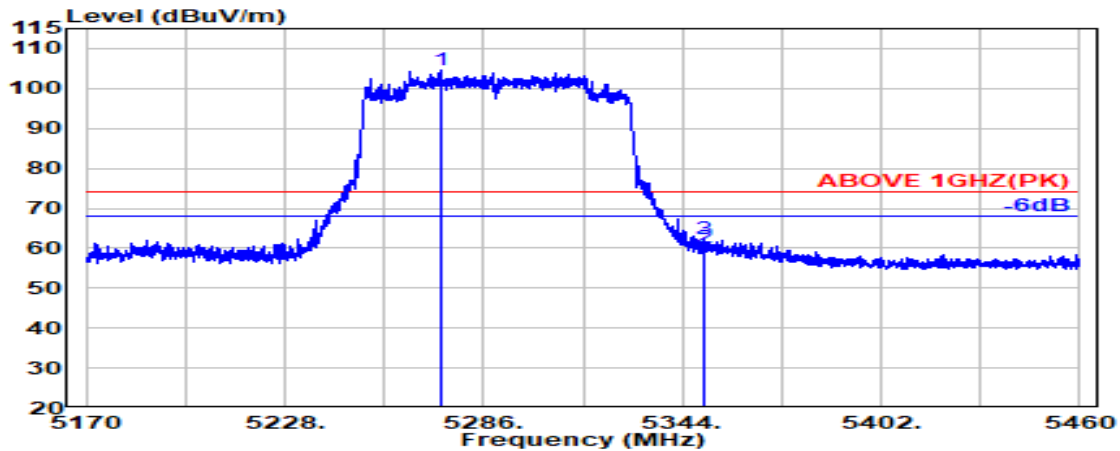

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5273.400	33.94	8.62	34.29	96.17	104.44	---	---	Peak
5350.000	33.90	8.67	34.26	51.98	60.28	74.00	13.72	Peak
5350.200	33.90	8.67	34.26	53.84	62.15	74.00	11.85	Peak

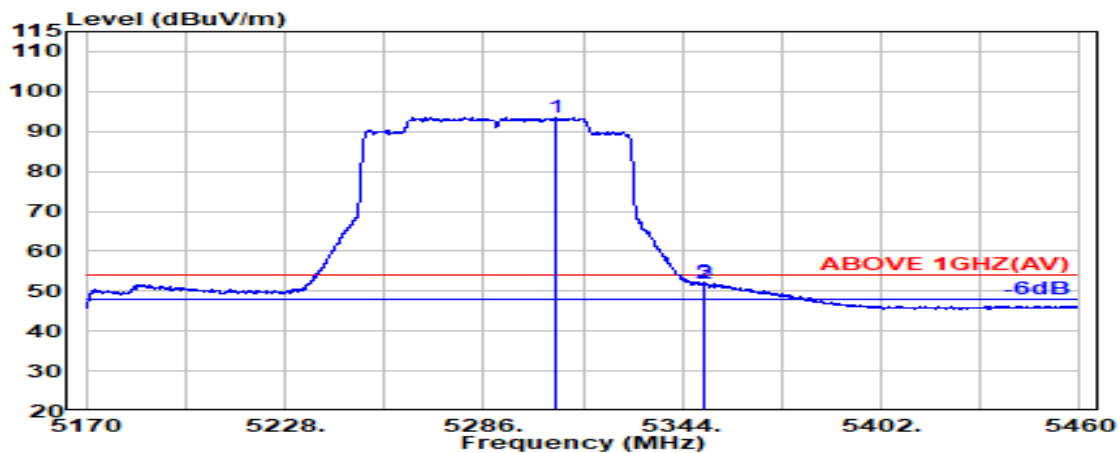


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.000	34.07	8.64	34.27	85.13	93.57	---	---	Average
5350.000	33.90	8.67	34.26	43.49	51.80	54.00	2.20	Average
5350.300	33.90	8.67	34.26	43.78	52.09	54.00	1.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

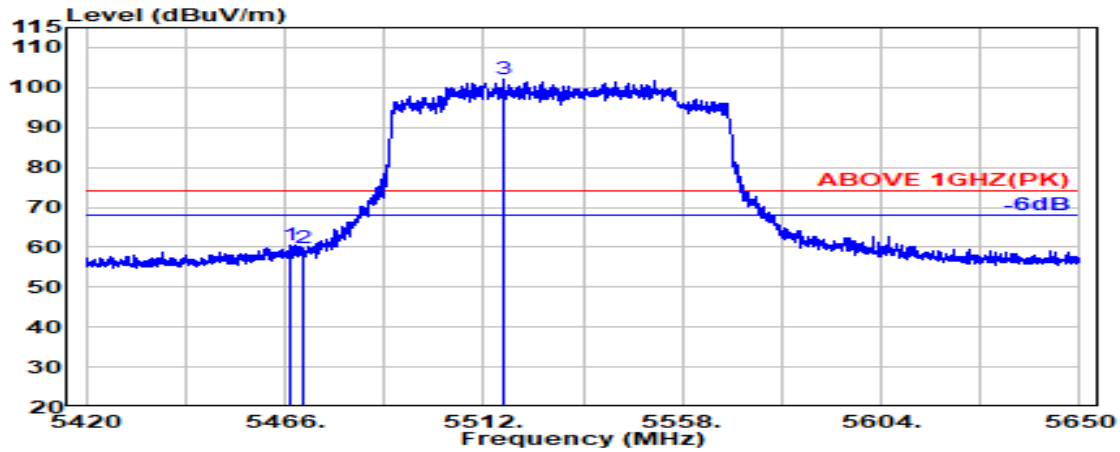

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	8.73	34.21	51.98	60.66	74.00	13.34	Peak
5470.000	34.16	8.74	34.21	50.95	59.63	74.00	14.37	Peak
@ 5516.600	34.10	8.76	34.21	93.41	102.06	---	---	Peak

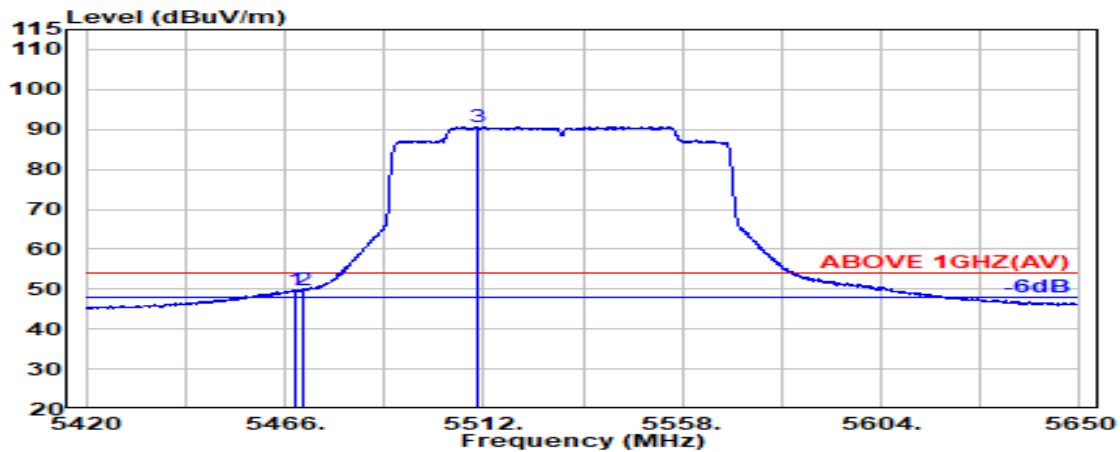


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.16	8.73	34.21	41.22	49.91	54.00	4.09	Average
5470.000	34.16	8.74	34.21	41.04	49.72	54.00	4.28	Average
@ 5510.600	34.10	8.76	34.21	82.13	90.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

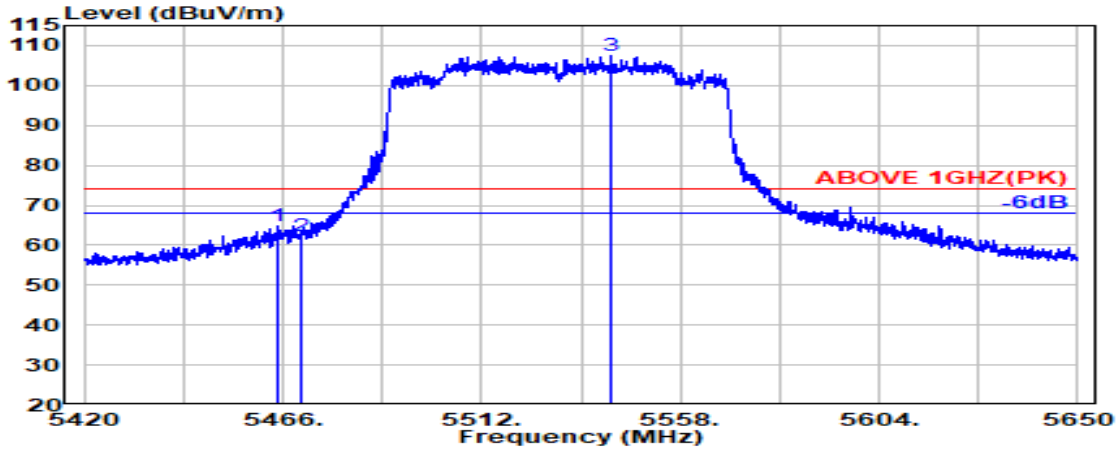

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5464.900	34.17	8.73	34.21	56.18	64.87	74.00	9.13	Peak
5470.000	34.16	8.74	34.21	53.64	62.33	74.00	11.67	Peak
@ 5542.000	34.10	8.78	34.22	98.80	107.46	---	---	Peak

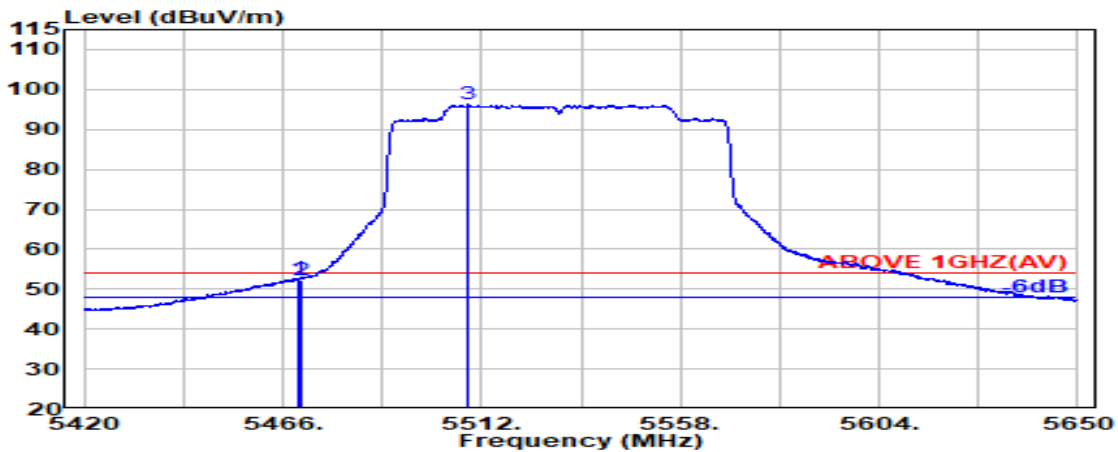


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.600	34.16	8.74	34.21	43.79	52.47	54.00	1.53	Average
5470.000	34.16	8.74	34.21	43.66	52.35	54.00	1.65	Average
@ 5508.700	34.10	8.76	34.20	87.56	96.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

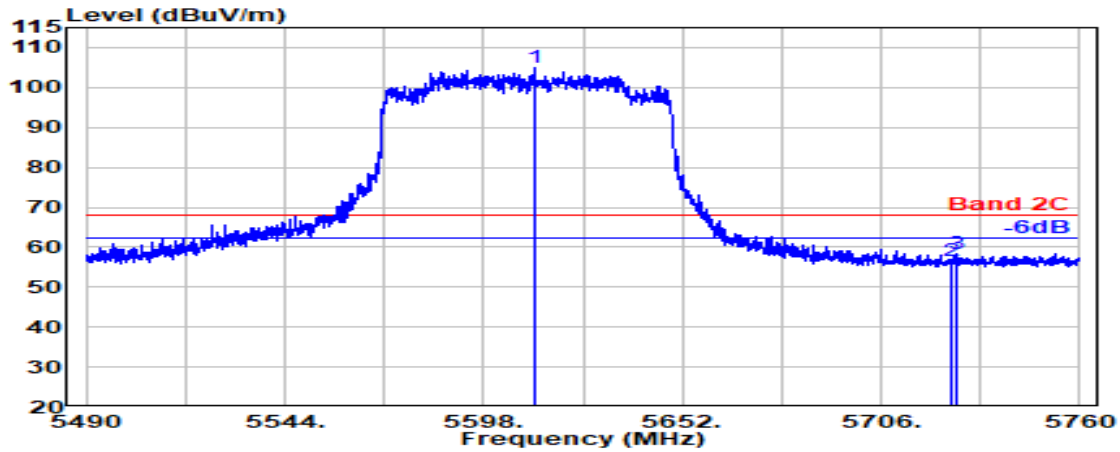

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5612.000	34.00	8.82	34.25	96.48	105.04	---	---	Peak
5725.000	33.80	8.88	34.31	48.28	56.65	68.20	11.55	Peak
5726.500	33.80	8.88	34.31	50.02	58.39	68.20	9.81	Peak

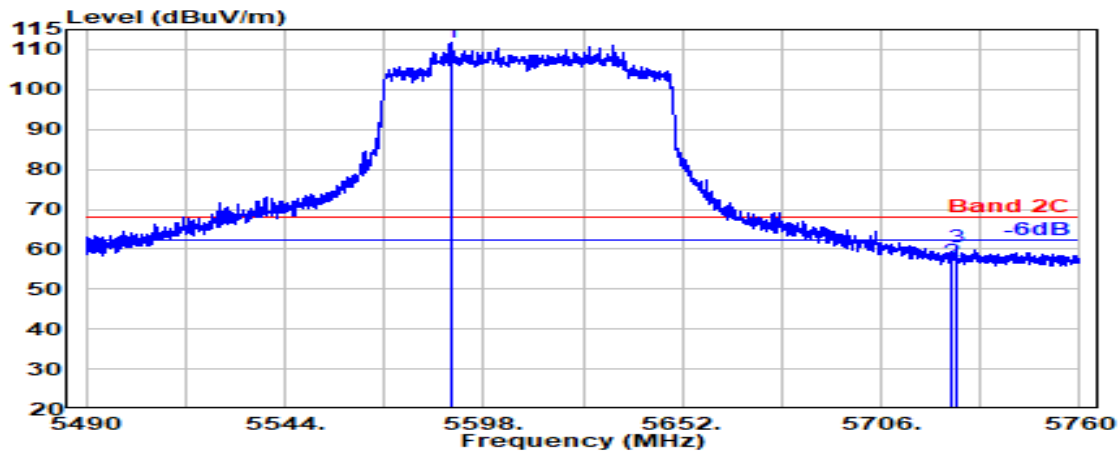


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5589.000	34.02	8.80	34.24	103.15	111.74	---	---	Peak
5725.000	33.80	8.88	34.31	48.65	57.03	68.20	11.17	Peak
5726.400	33.80	8.88	34.31	52.07	60.45	68.20	7.75	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.


Test SKU: SKU #1 (With LUXSHARE-ICT ANT)

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

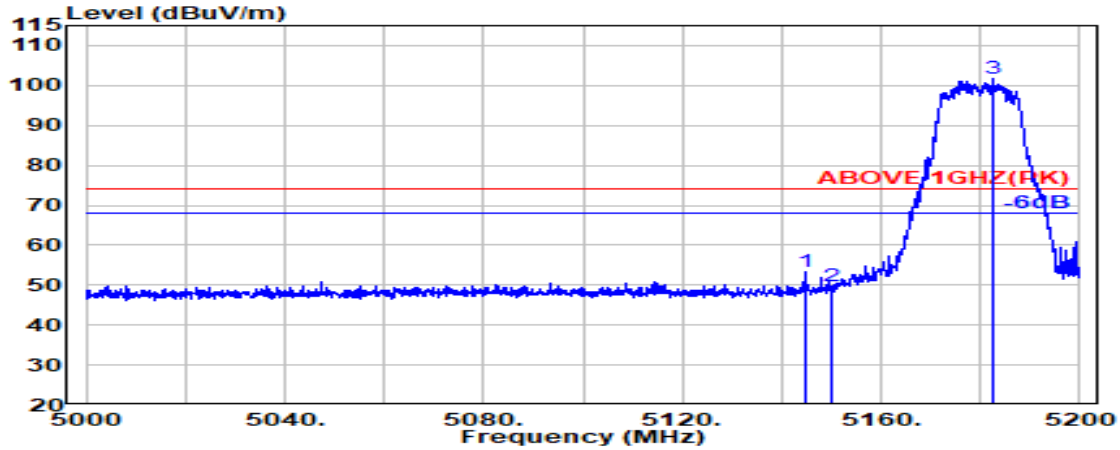

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	33.70	8.54	34.34	45.57	53.47	74.00	20.53	Peak
5150.000	33.70	8.54	34.34	42.03	49.93	74.00	24.07	Peak
@ 5182.300	33.70	8.56	34.32	93.91	101.85	---	---	Peak

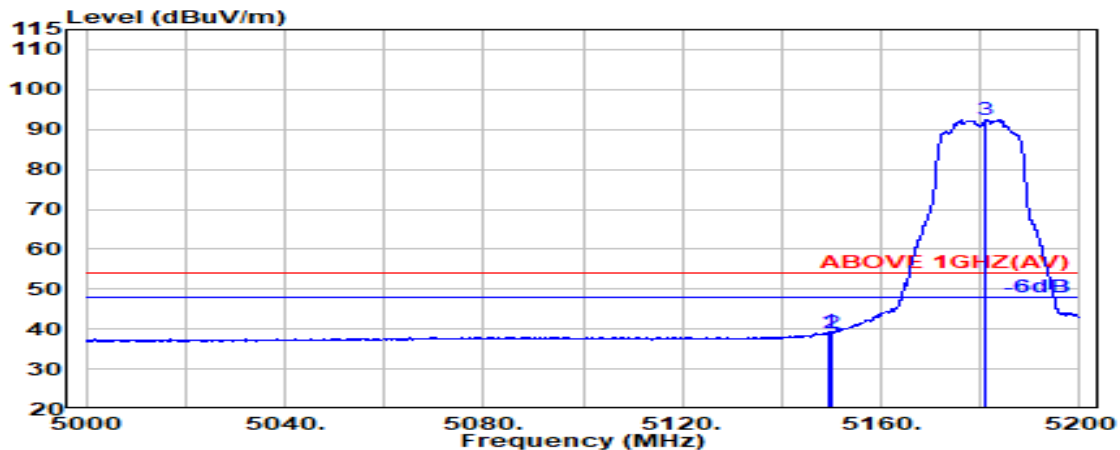


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.54	34.34	31.28	39.18	54.00	14.82	Average
5150.000	33.70	8.54	34.34	31.22	39.13	54.00	14.87	Average
@ 5181.200	33.70	8.56	34.33	84.47	92.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

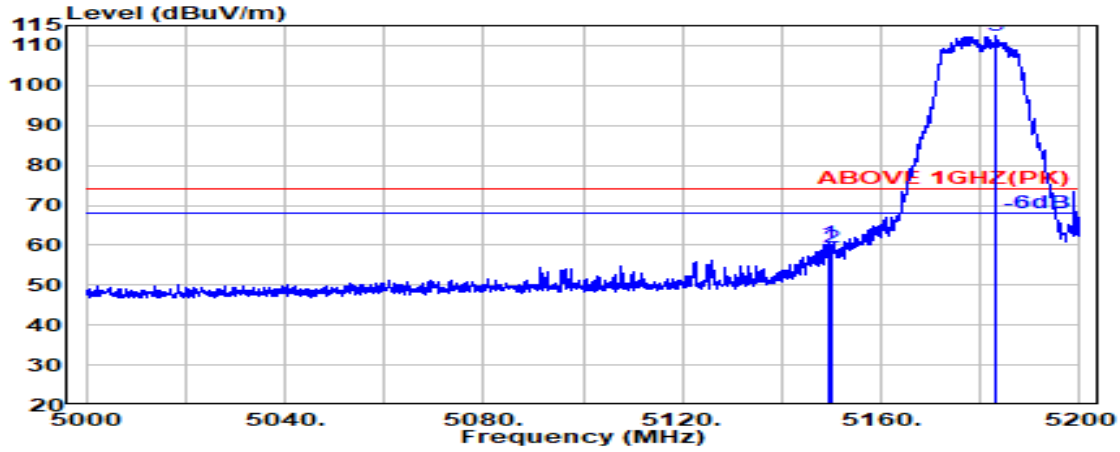

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.34	52.52	60.43	74.00	13.57	Peak
5150.000	33.70	8.54	34.34	51.69	59.60	74.00	14.40	Peak
@ 5183.100	33.70	8.56	34.32	104.62	112.56	---	---	Peak

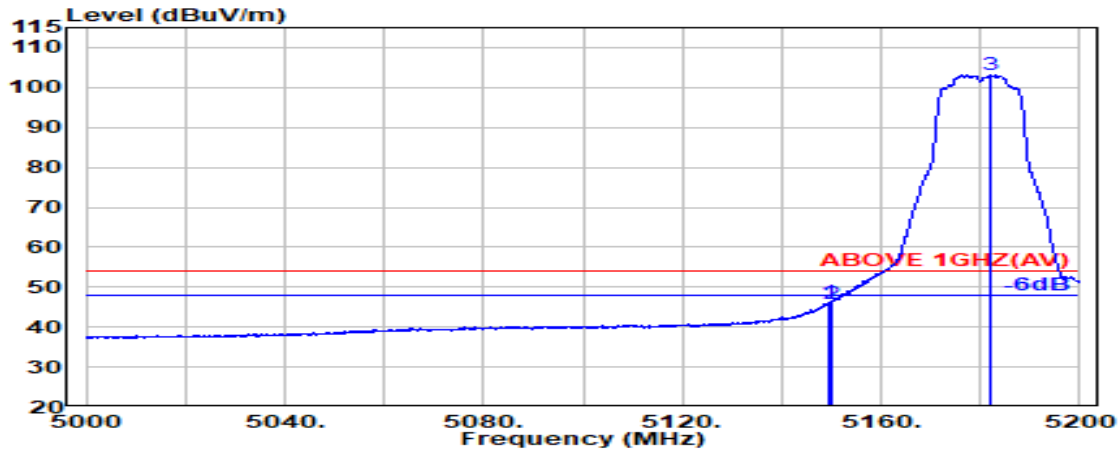


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.34	38.11	46.02	54.00	7.98	Average
5150.000	33.70	8.54	34.34	38.08	45.99	54.00	8.01	Average
@ 5181.900	33.70	8.56	34.33	95.15	103.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

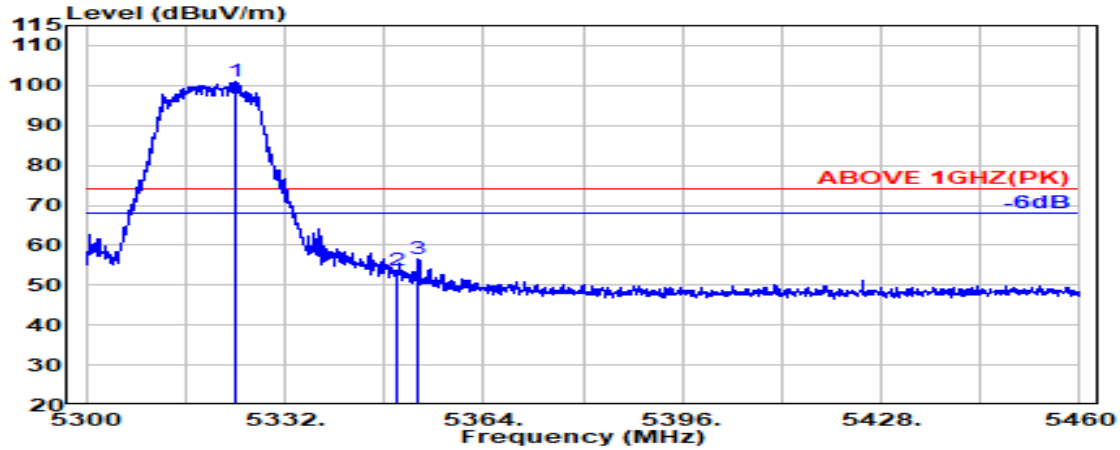

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.200	34.00	8.65	34.27	92.50	100.88	---	---	Peak
5350.000	33.90	8.67	34.26	45.43	53.74	74.00	20.26	Peak
5353.500	33.91	8.67	34.26	48.09	56.42	74.00	17.58	Peak

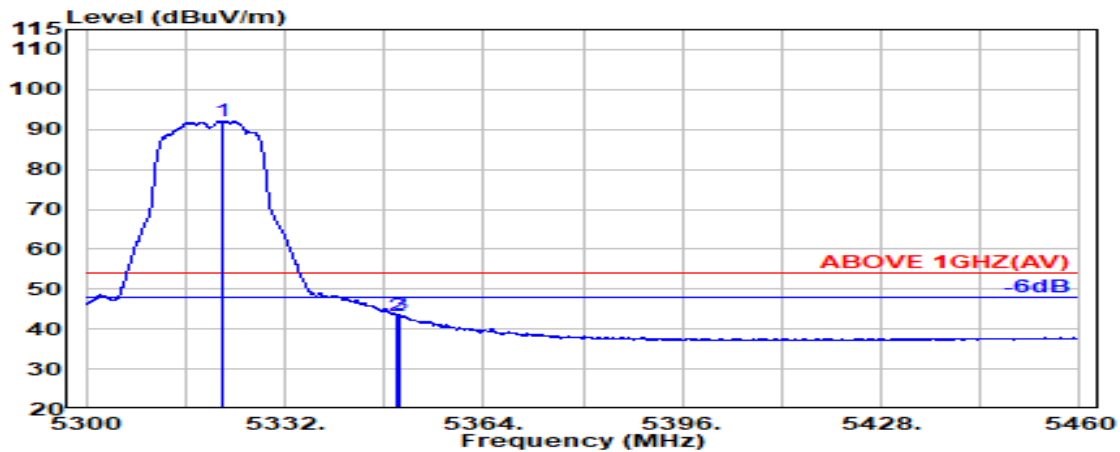


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.900	34.01	8.65	34.27	83.74	92.13	---	---	Average
5350.000	33.90	8.67	34.26	35.04	43.35	54.00	10.65	Average
5350.500	33.90	8.67	34.26	35.18	43.49	54.00	10.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

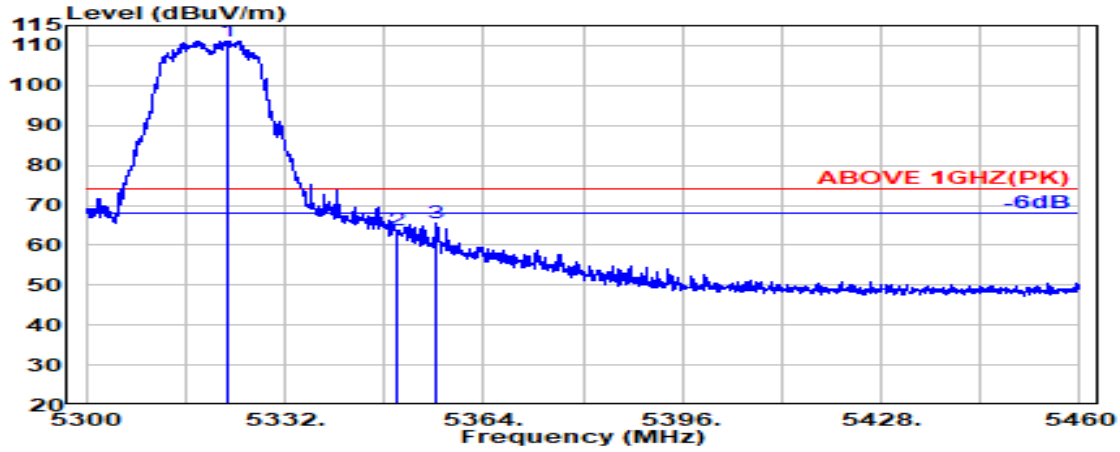

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.700	34.01	8.65	34.27	102.84	111.23	---	---	Peak
5350.000	33.90	8.67	34.26	55.53	63.83	74.00	10.17	Peak
5356.400	33.93	8.67	34.26	57.31	65.65	74.00	8.35	Peak

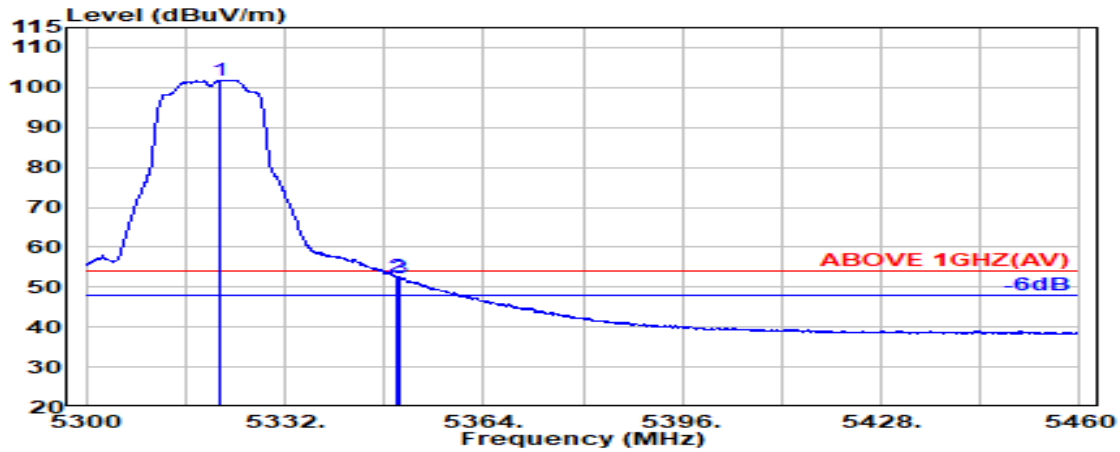


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	34.01	8.65	34.27	93.41	101.80	---	---	Average
5350.000	33.90	8.67	34.26	44.15	52.46	54.00	1.54	Average
5350.500	33.90	8.67	34.26	44.05	52.36	54.00	1.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

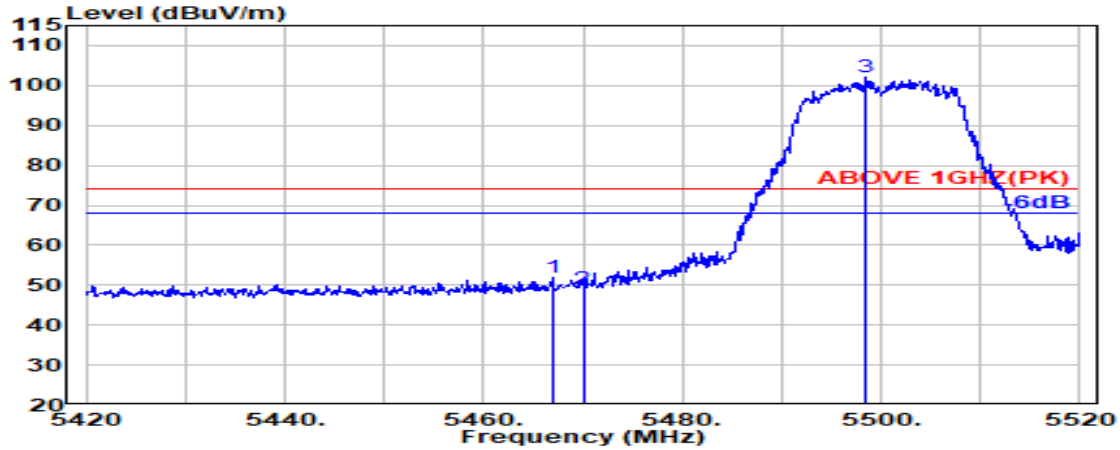

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.17	8.73	34.21	43.11	51.79	74.00	22.21	Peak
5470.000	34.16	8.74	34.21	40.49	49.17	74.00	24.83	Peak
@ 5498.500	34.10	8.75	34.20	93.36	102.02	---	---	Peak

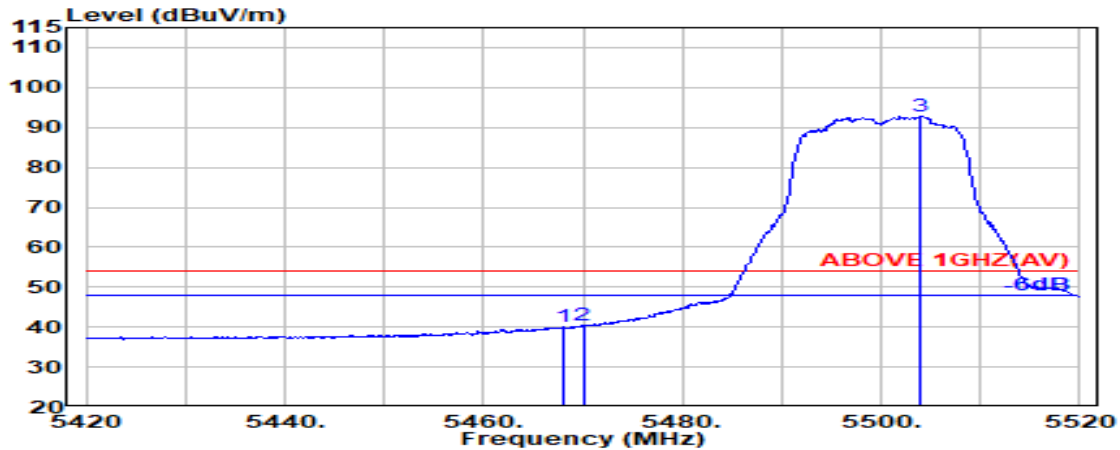


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.21	31.46	40.15	54.00	13.85	Average
5470.000	34.16	8.74	34.21	31.66	40.34	54.00	13.66	Average
@ 5503.900	34.10	8.76	34.20	84.11	92.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

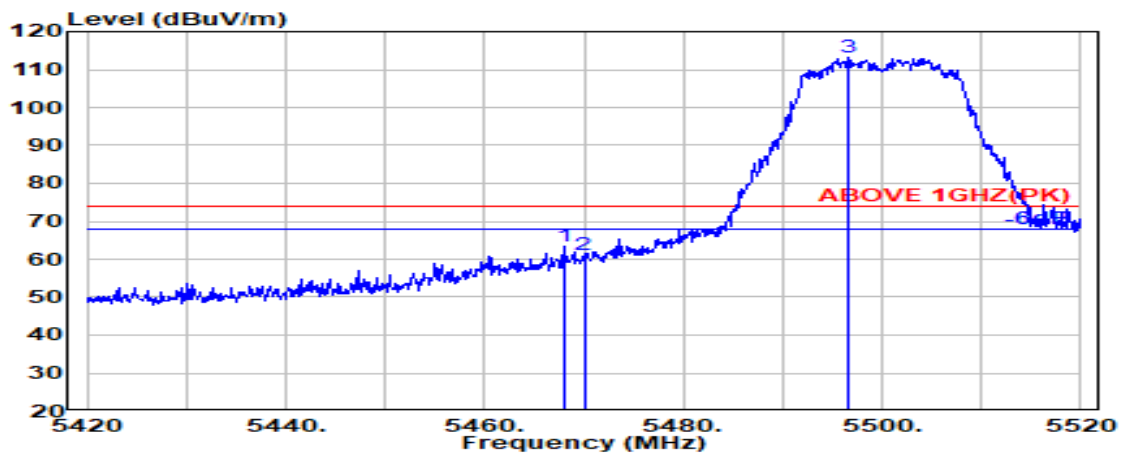

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.21	54.74	63.43	74.00	10.57	Peak
5470.000	34.16	8.74	34.21	52.38	61.06	74.00	12.94	Peak
@ 5496.700	34.11	8.75	34.20	104.59	113.25	---	---	Peak

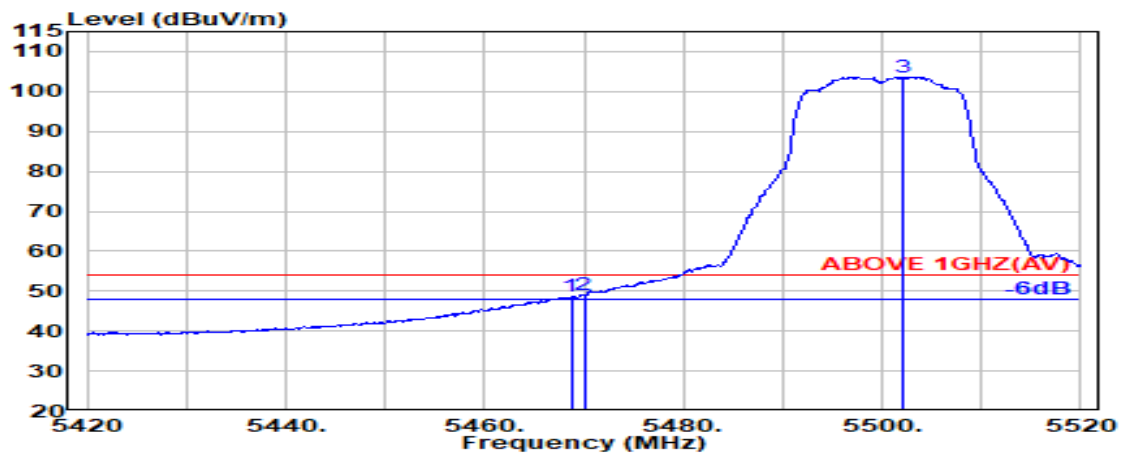


Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.21	39.88	48.57	54.00	5.43	Average
5470.000	34.16	8.74	34.21	40.36	49.04	54.00	4.96	Average
@ 5502.200	34.10	8.75	34.20	95.03	103.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

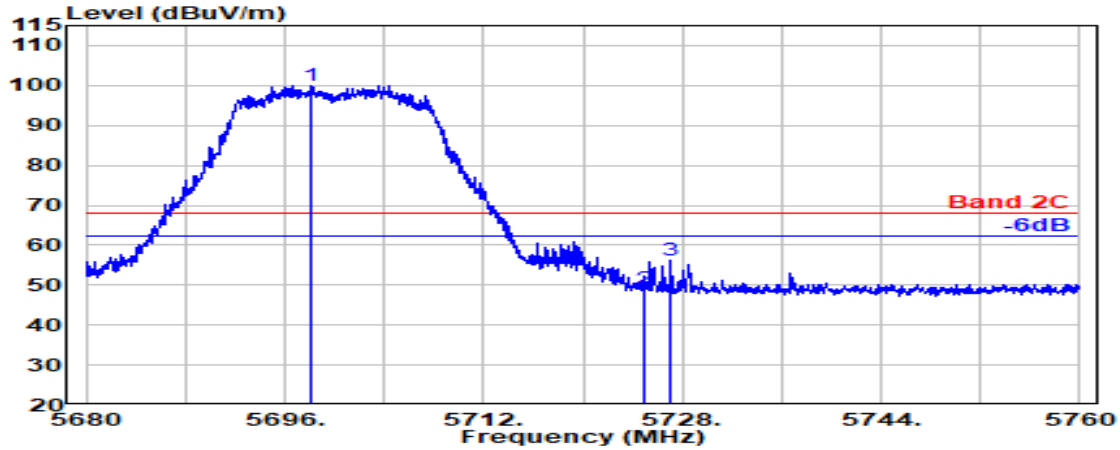
**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.200	33.81	8.87	34.29	91.52	99.90	---	---	Peak
5725.000	33.80	8.88	34.31	40.78	49.15	68.20	19.05	Peak
5727.100	33.80	8.88	34.31	47.94	56.32	68.20	11.88	Peak

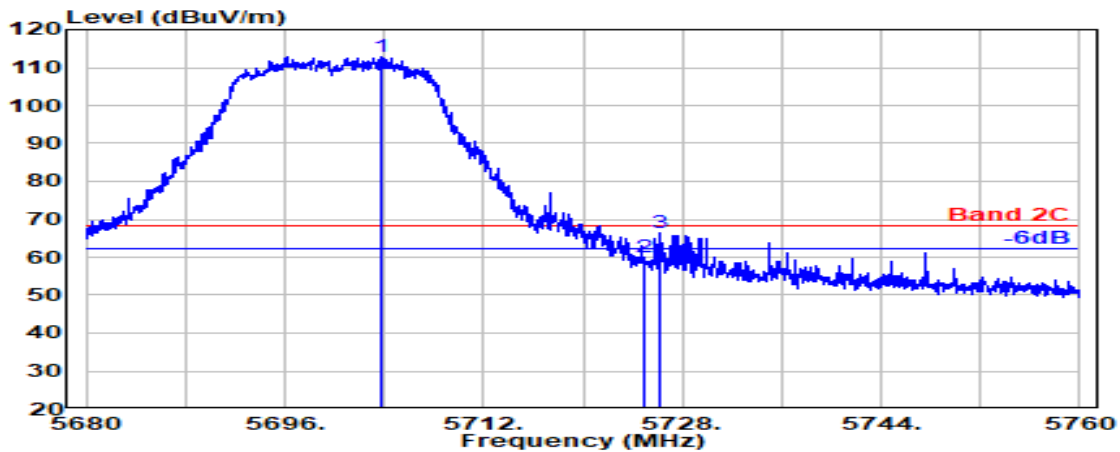
**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.700	33.80	8.87	34.30	104.58	112.95	---	---	Peak
5725.000	33.80	8.88	34.31	51.53	59.91	68.20	8.29	Peak
5726.200	33.80	8.88	34.31	58.03	66.41	68.20	1.79	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

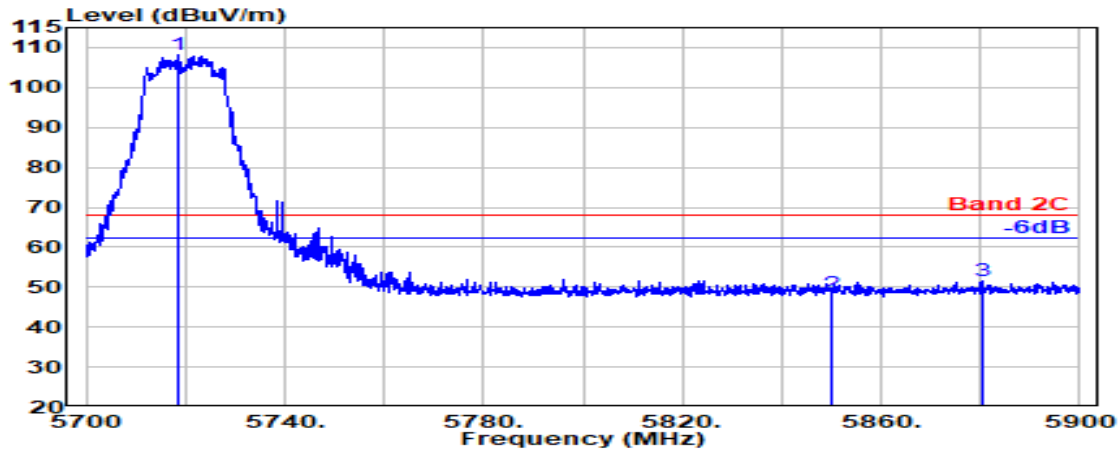

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.600	33.80	8.88	34.30	99.68	108.05	---	---	Peak
5850.000	34.10	8.95	34.36	39.65	48.33	68.20	19.87	Peak
5880.300	34.10	8.97	34.38	42.86	51.55	68.20	16.65	Peak

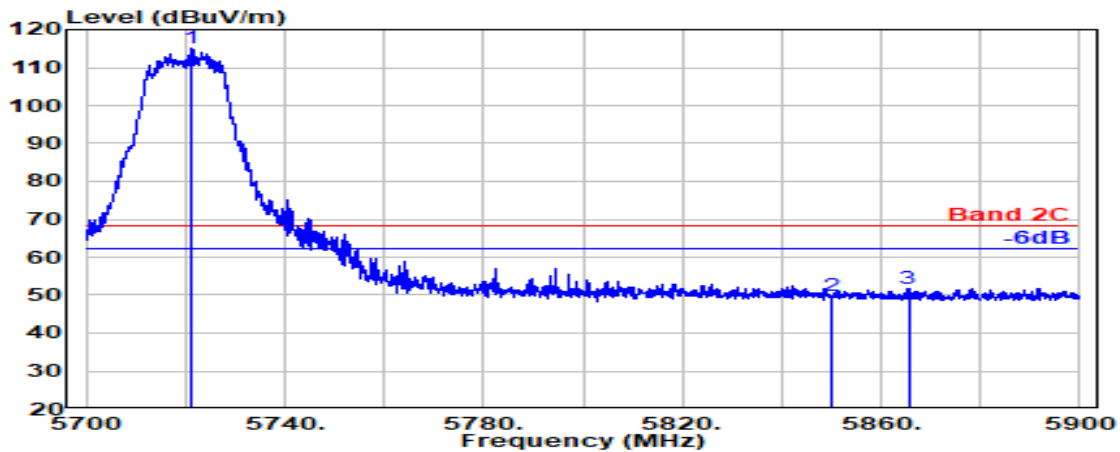


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.300	33.80	8.88	34.30	106.55	114.93	---	---	Peak
5850.000	34.10	8.95	34.36	41.18	49.87	68.20	18.33	Peak
5865.500	34.10	8.96	34.37	43.14	51.82	68.20	16.38	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

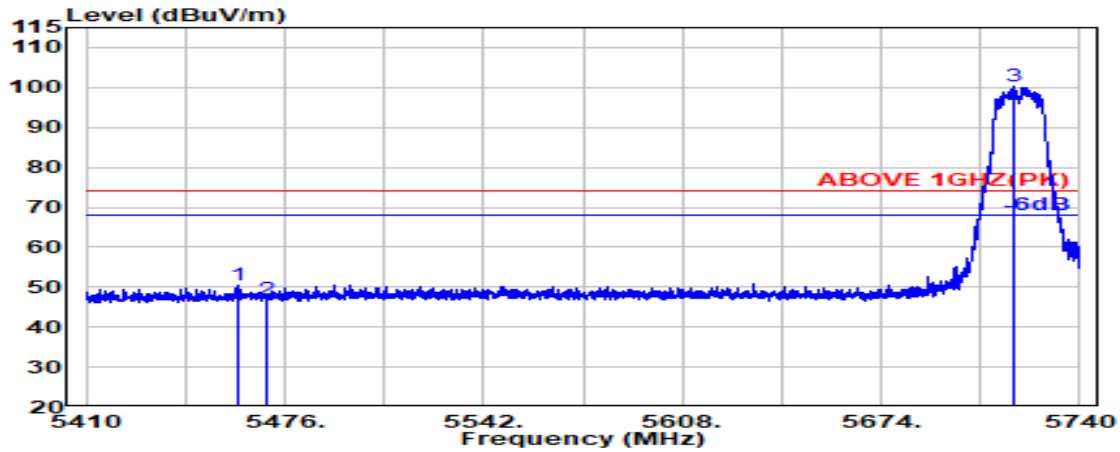

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.700	34.18	8.73	34.22	41.83	50.52	74.00	23.48	Peak
5470.000	34.16	8.74	34.21	38.19	46.87	74.00	27.13	Peak
@ 5718.300	33.80	8.88	34.30	91.79	100.16	---	---	Peak




Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.500	34.19	8.73	34.22	29.00	37.70	54.00	16.30	Average
5470.000	34.16	8.74	34.21	28.72	37.40	54.00	16.60	Average
@ 5717.500	33.80	8.88	34.30	82.90	91.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

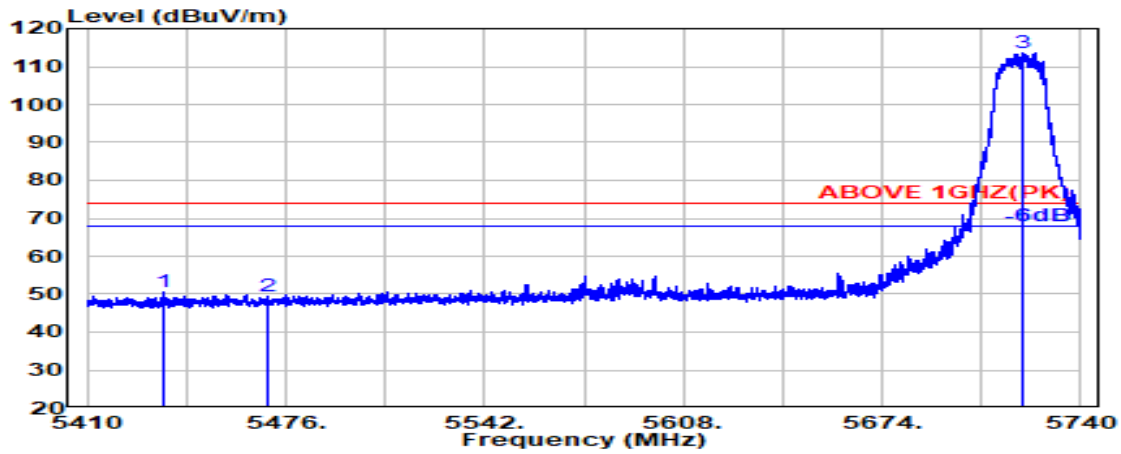

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.600	34.17	8.72	34.22	41.97	50.63	74.00	23.37	Peak
5470.000	34.16	8.74	34.21	40.82	49.50	74.00	24.50	Peak
@ 5720.600	33.80	8.88	34.30	105.33	113.71	---	---	Peak

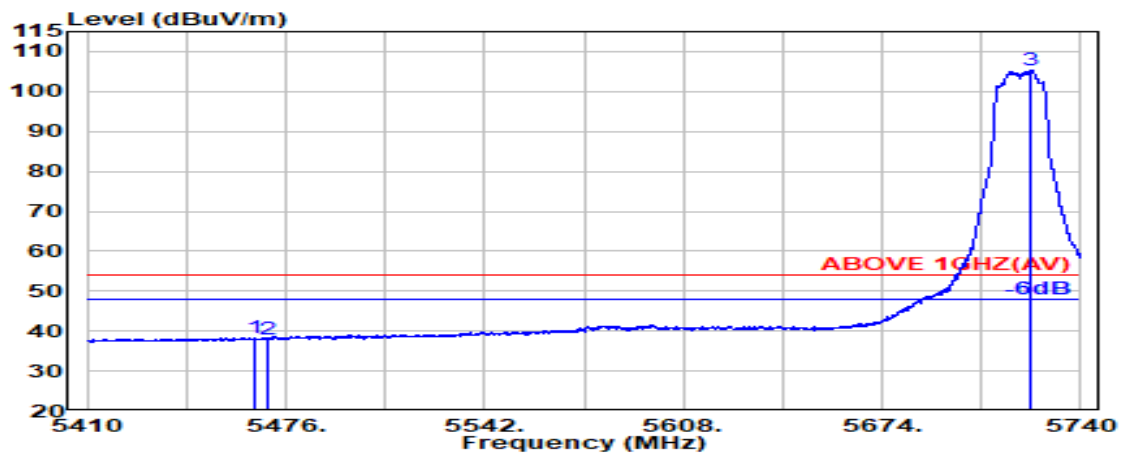


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.400	34.17	8.73	34.21	29.62	38.31	54.00	15.69	Average
5470.000	34.16	8.74	34.21	29.30	37.99	54.00	16.01	Average
@ 5723.500	33.80	8.88	34.31	96.89	105.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

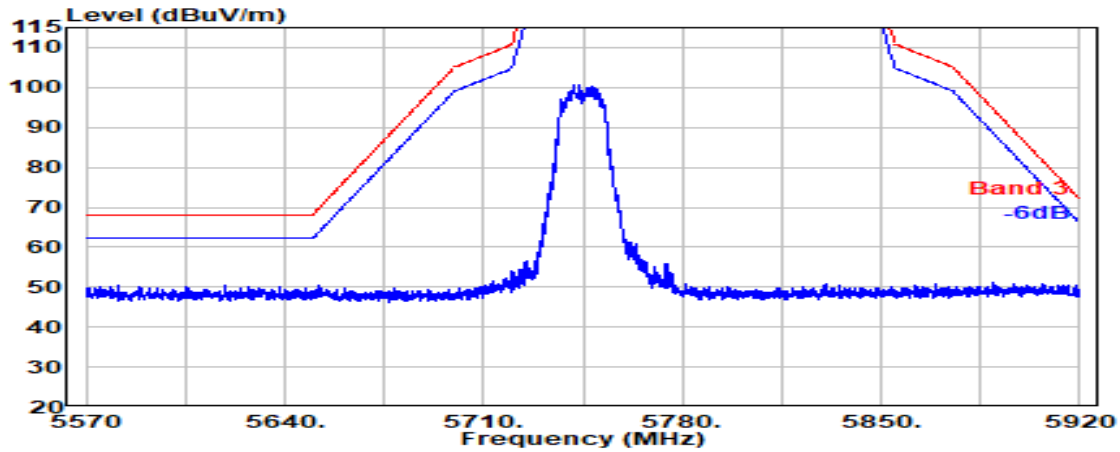


Antenna at Vertical Polarization

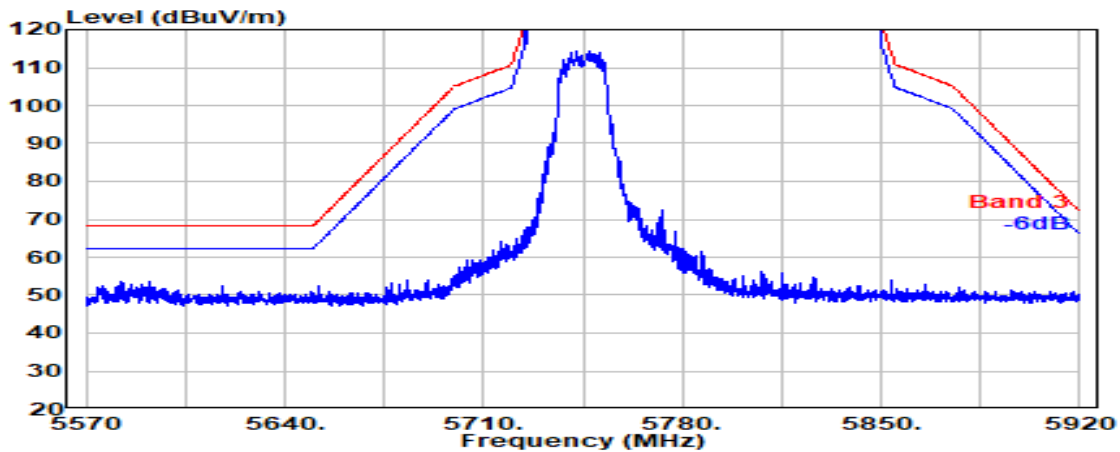




Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

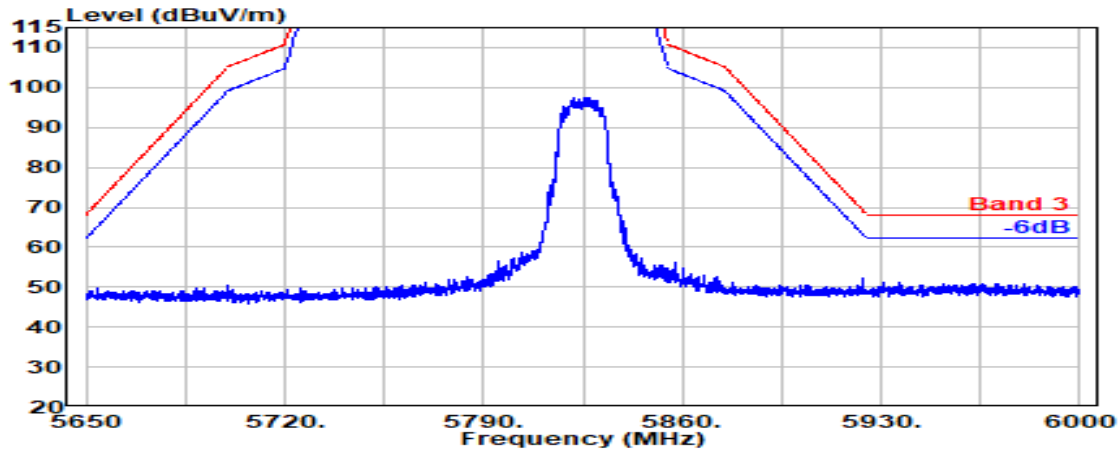

Antenna at Vertical Polarization

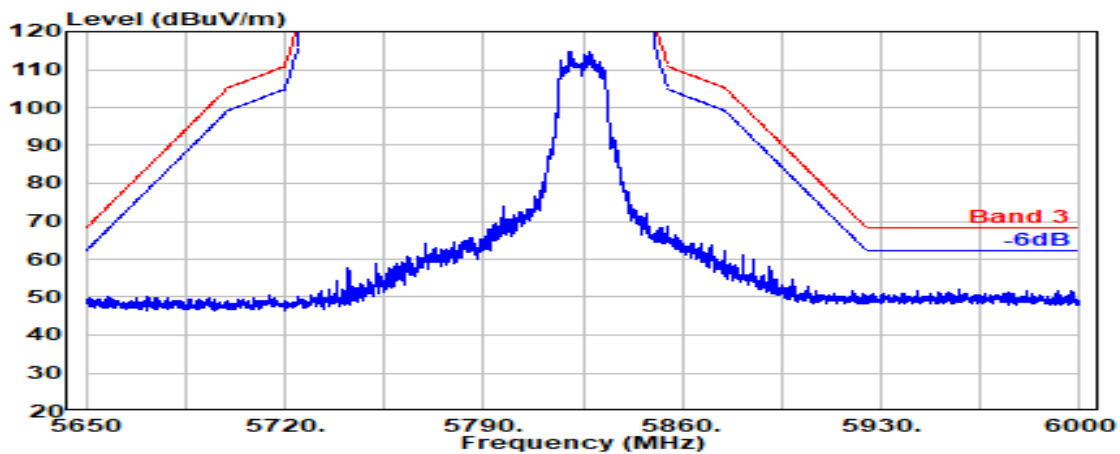


Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

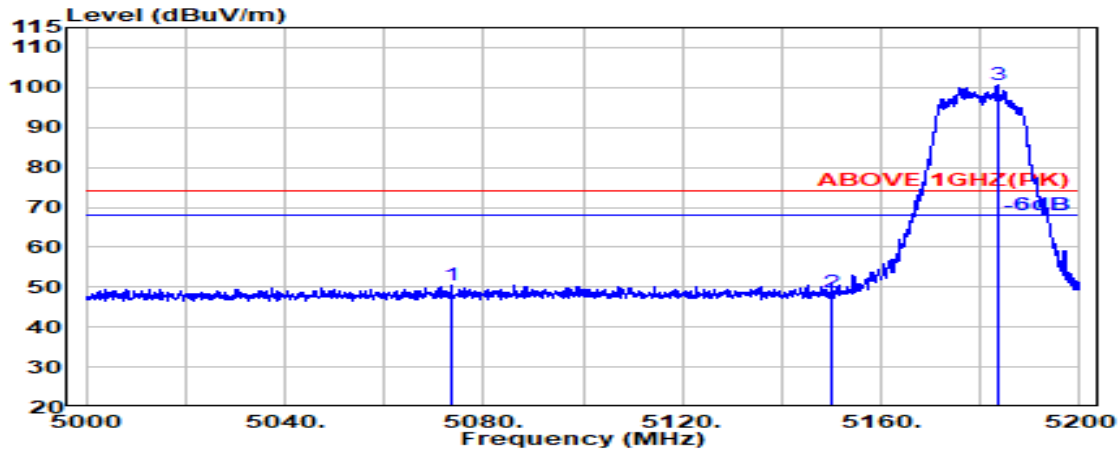

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5073.400	33.59	8.50	34.37	42.77	50.49	74.00	23.51	Peak
5150.000	33.70	8.54	34.34	40.75	48.65	74.00	25.35	Peak
@ 5183.400	33.70	8.56	34.32	92.72	100.66	---	---	Peak

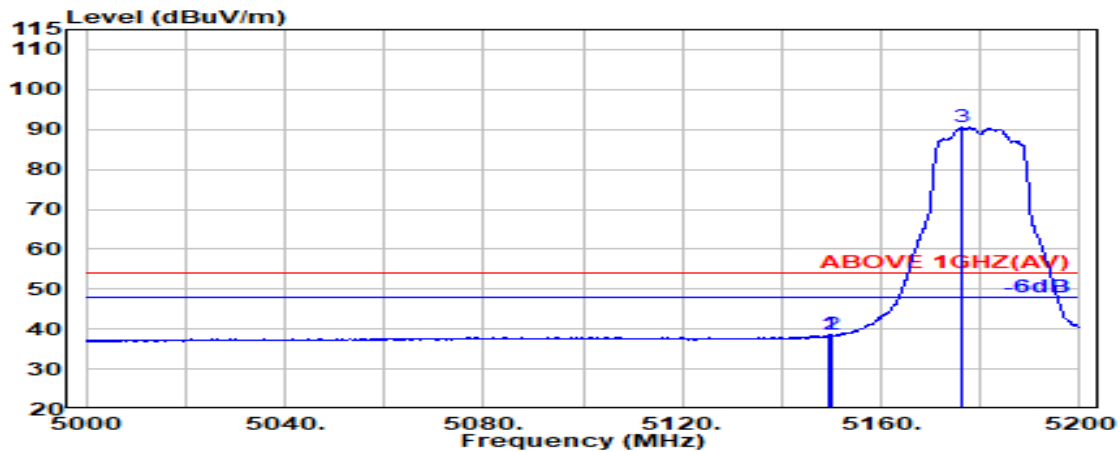


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.34	30.61	38.51	54.00	15.49	Average
5150.000	33.70	8.54	34.34	30.62	38.52	54.00	15.48	Average
@ 5176.100	33.70	8.56	34.33	82.73	90.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

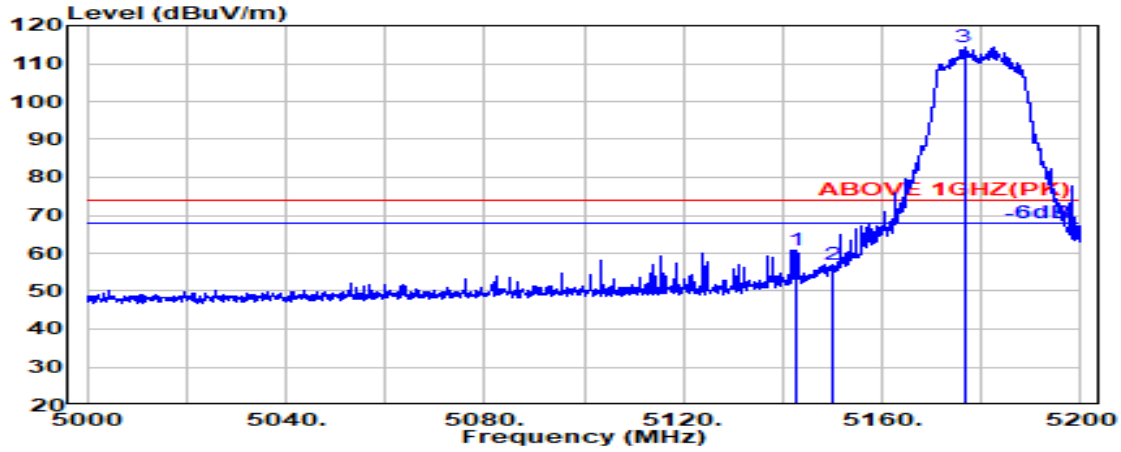

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.500	33.70	8.54	34.34	52.94	60.83	74.00	13.17	Peak
5150.000	33.70	8.54	34.34	49.24	57.15	74.00	16.85	Peak
@ 5176.500	33.70	8.56	34.33	106.53	114.46	---	---	Peak

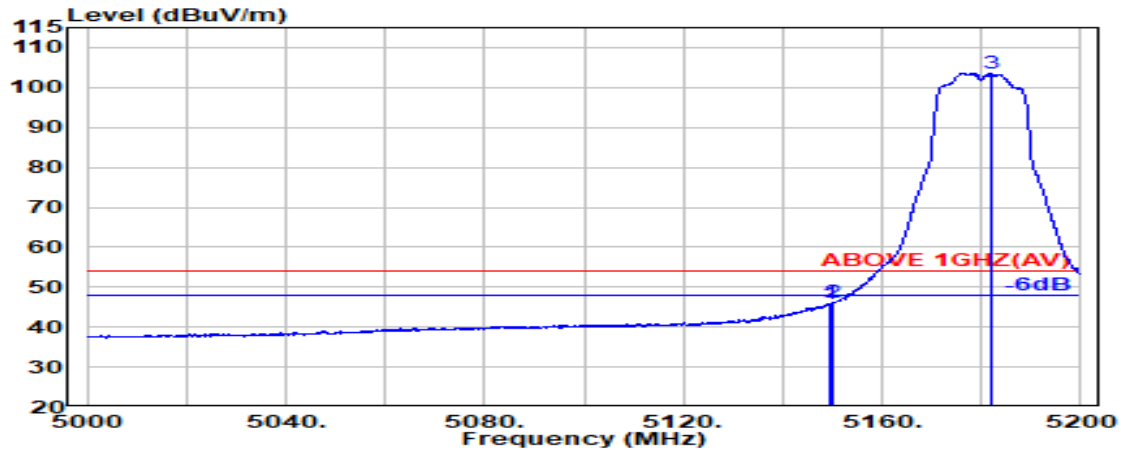


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.54	34.34	37.98	45.89	54.00	8.11	Average
5150.000	33.70	8.54	34.34	38.27	46.18	54.00	7.82	Average
@ 5181.800	33.70	8.56	34.33	95.64	103.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

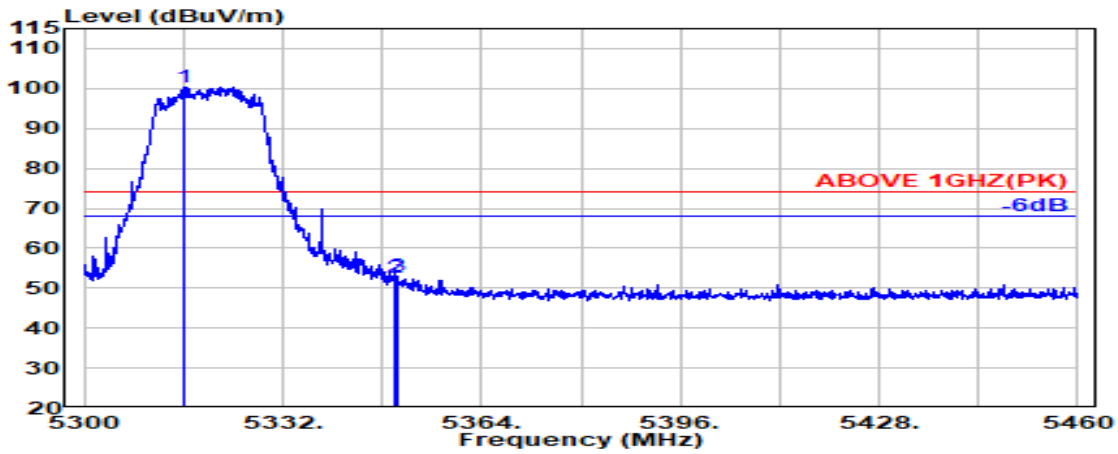

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.900	34.04	8.64	34.27	92.07	100.48	---	---	Peak
5350.000	33.90	8.67	34.26	44.44	52.75	74.00	21.25	Peak
5350.400	33.90	8.67	34.26	44.70	53.01	74.00	20.99	Peak

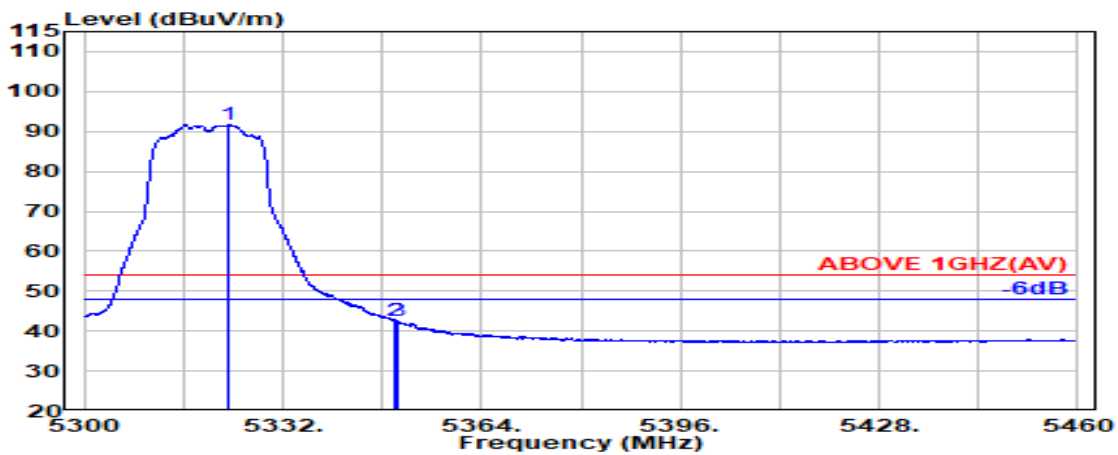


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.100	34.01	8.65	34.27	83.22	91.61	---	---	Average
5350.000	33.90	8.67	34.26	34.42	42.72	54.00	11.28	Average
5350.500	33.90	8.67	34.26	34.34	42.65	54.00	11.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

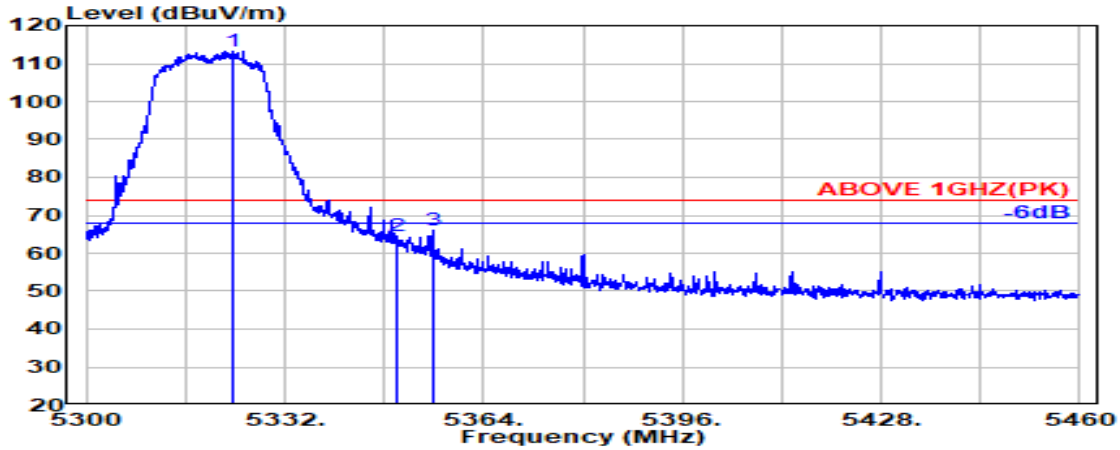

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.00	8.65	34.27	104.88	113.27	---	---	Peak
5350.000	33.90	8.67	34.26	56.27	64.58	74.00	9.42	Peak
5355.900	33.92	8.67	34.26	57.81	66.14	74.00	7.86	Peak

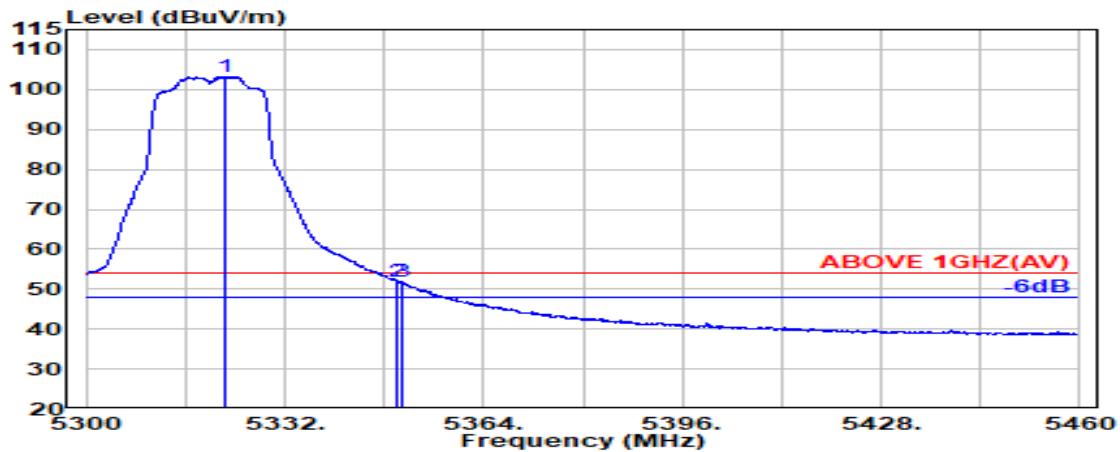


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	34.01	8.65	34.27	94.88	103.27	---	---	Average
5350.000	33.90	8.67	34.26	43.73	52.04	54.00	1.96	Average
5350.700	33.90	8.67	34.26	43.53	51.84	54.00	2.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

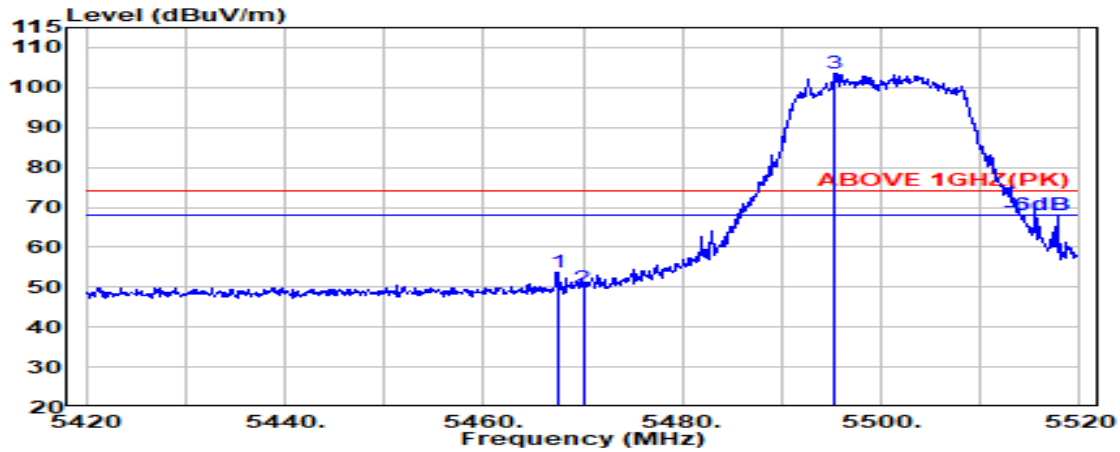

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	8.73	34.21	45.14	53.83	74.00	20.17	Peak
5470.000	34.16	8.74	34.21	41.21	49.89	74.00	24.11	Peak
@ 5495.400	34.11	8.75	34.20	94.97	103.63	---	---	Peak

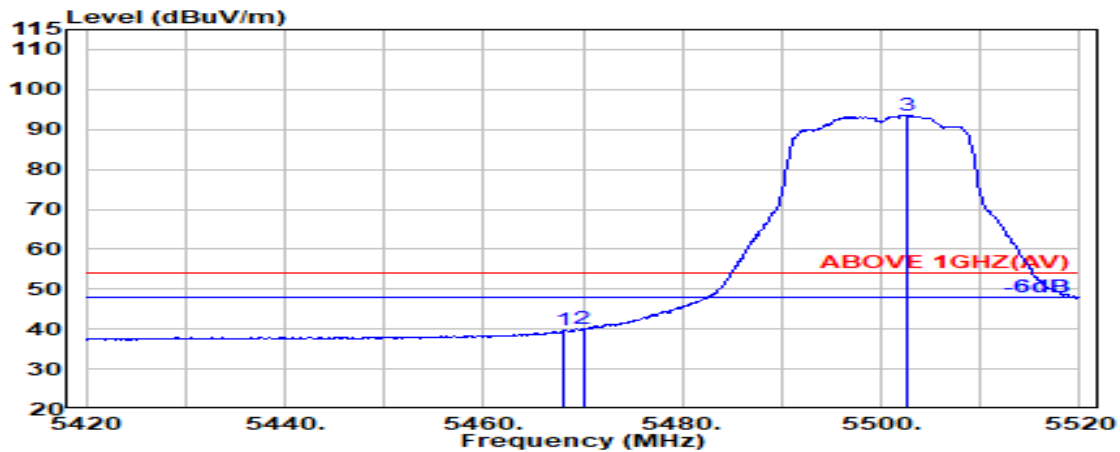


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.16	8.73	34.21	31.07	39.76	54.00	14.24	Average
5470.000	34.16	8.74	34.21	31.22	39.91	54.00	14.09	Average
@ 5502.500	34.10	8.75	34.20	84.94	93.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

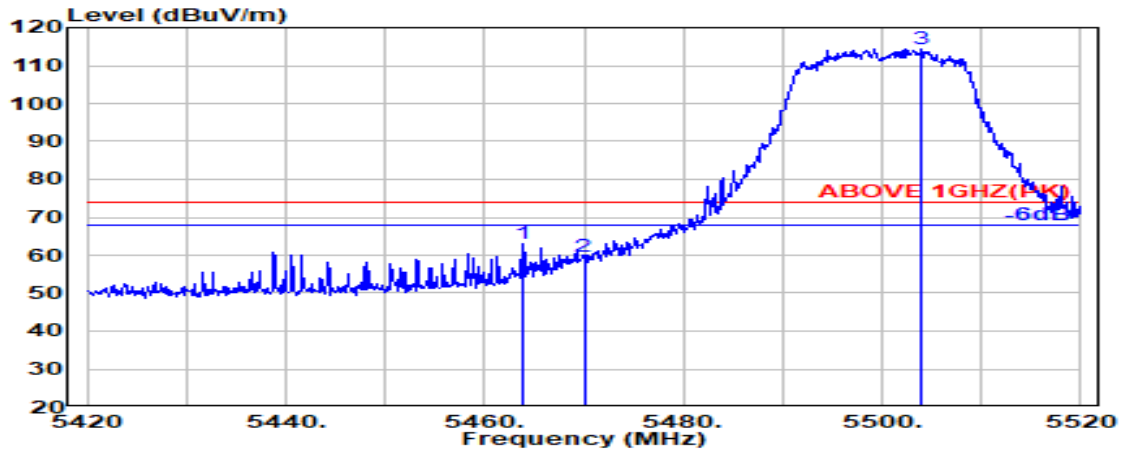

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.17	8.73	34.21	54.35	63.04	74.00	10.96	Peak
5470.000	34.16	8.74	34.21	50.83	59.52	74.00	14.48	Peak
@ 5503.900	34.10	8.76	34.20	105.71	114.36	---	---	Peak

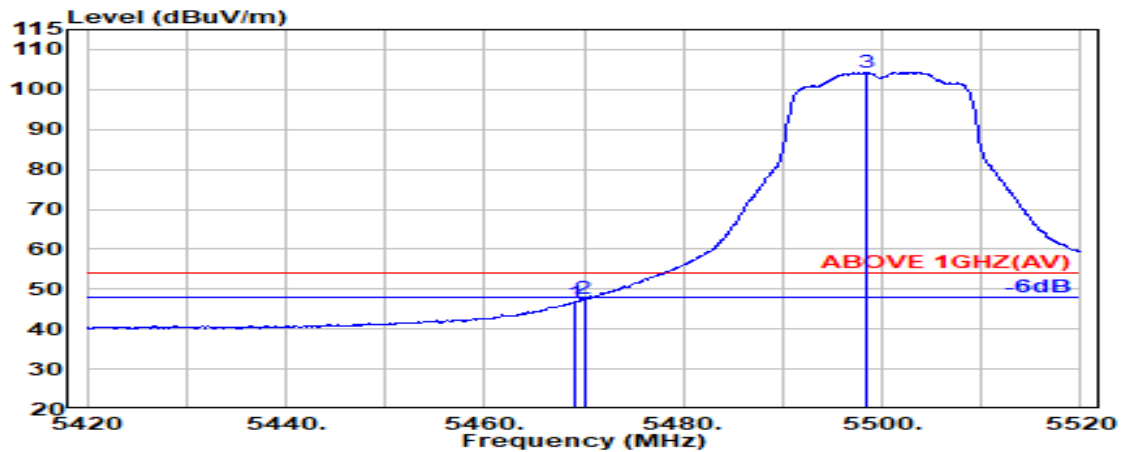


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.21	37.91	46.60	54.00	7.40	Average
5470.000	34.16	8.74	34.21	38.84	47.52	54.00	6.48	Average
@ 5498.500	34.10	8.75	34.20	95.74	104.39	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

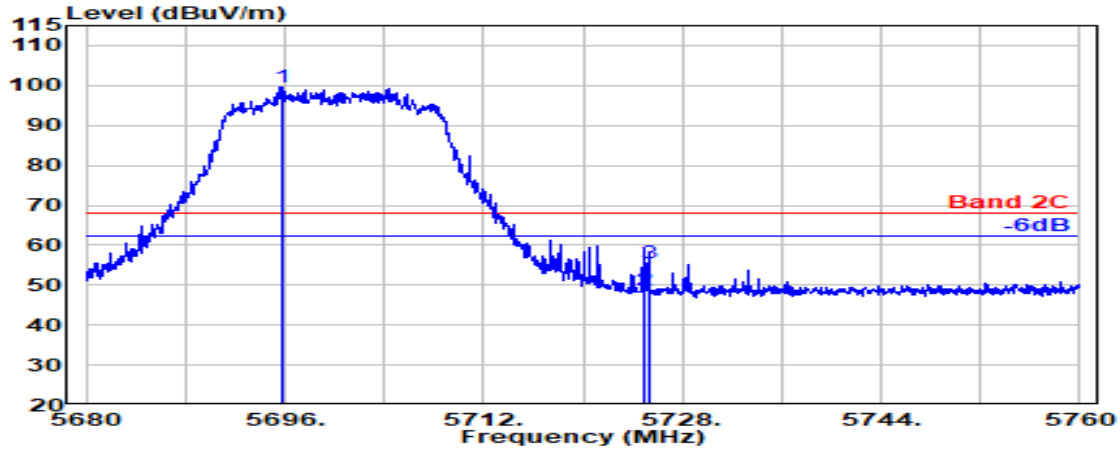

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.750	33.82	8.86	34.29	91.13	99.52	---	---	Peak
5725.000	33.80	8.88	34.31	40.16	48.54	68.20	19.66	Peak
5725.300	33.80	8.88	34.31	46.97	55.34	68.20	12.86	Peak

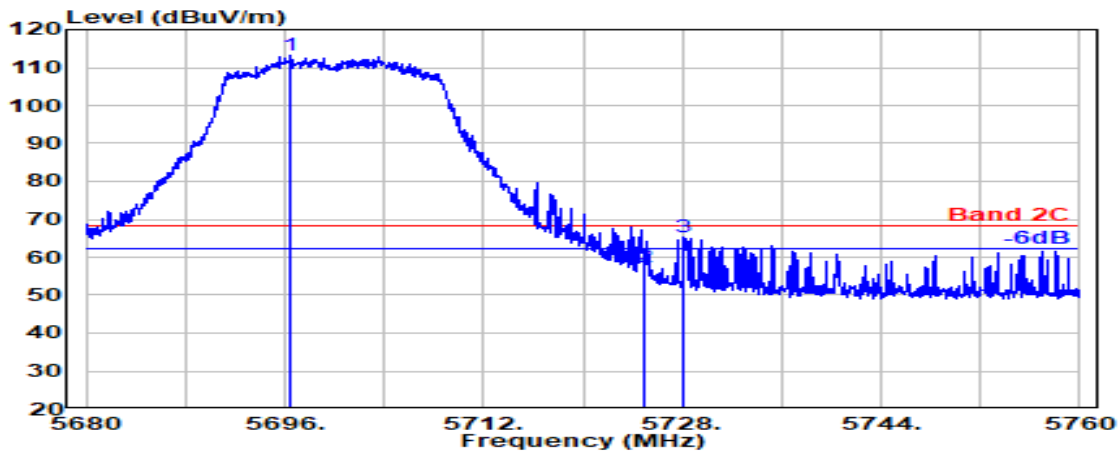


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.500	33.81	8.86	34.29	104.73	113.12	---	---	Peak
5725.000	33.80	8.88	34.31	48.94	57.31	68.20	10.89	Peak
5728.150	33.80	8.88	34.31	56.93	65.31	68.20	2.89	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

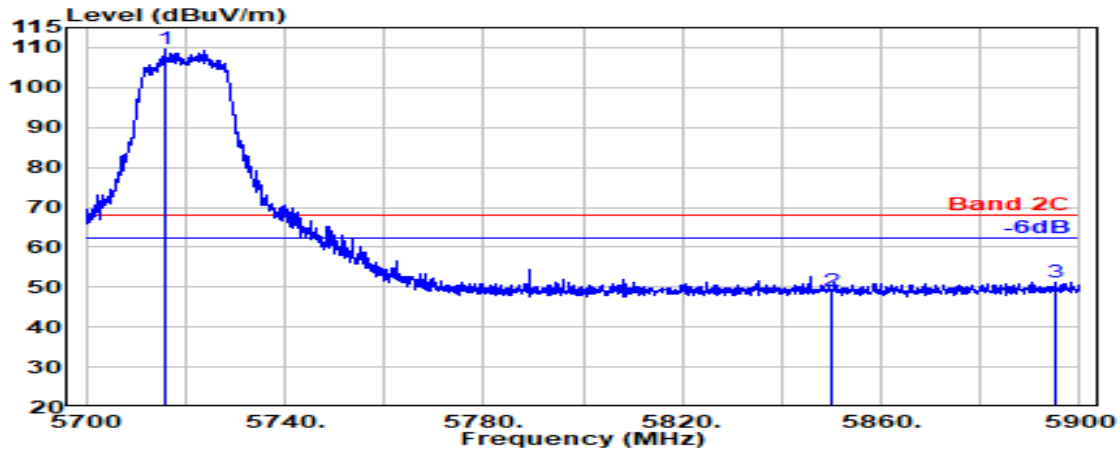

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5715.800	33.80	8.88	34.30	101.29	109.66	---	---	Peak
5850.000	34.10	8.95	34.36	40.40	49.09	68.20	19.11	Peak
5895.200	34.10	8.97	34.38	42.49	51.18	68.20	17.02	Peak

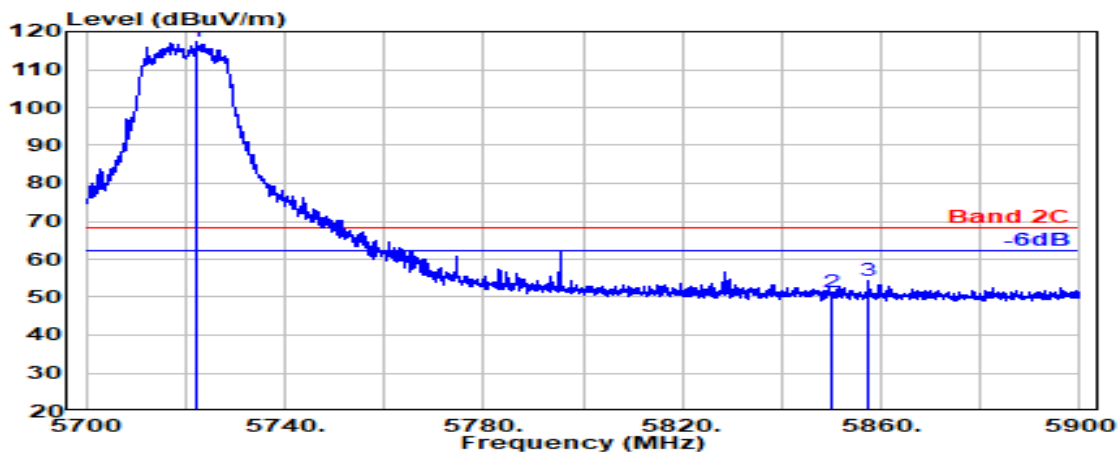


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5722.100	33.80	8.88	34.30	109.05	117.43	---	---	Peak
5850.000	34.10	8.95	34.36	42.55	51.23	68.20	16.97	Peak
5857.300	34.10	8.95	34.37	45.58	54.27	68.20	13.93	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

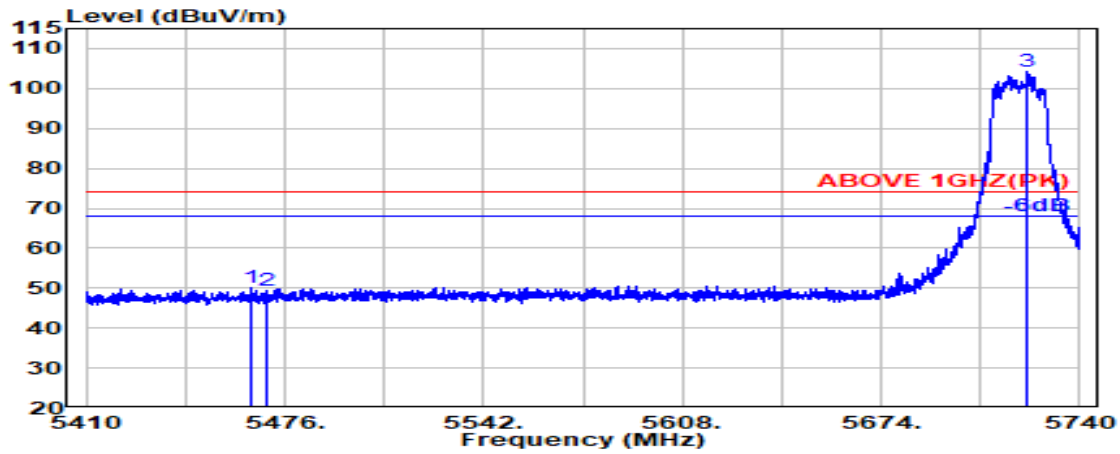

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.17	8.73	34.21	41.35	50.04	74.00	23.96	Peak
5470.000	34.16	8.74	34.21	40.56	49.25	74.00	24.75	Peak
@ 5722.400	33.80	8.88	34.30	95.74	104.11	---	---	Peak

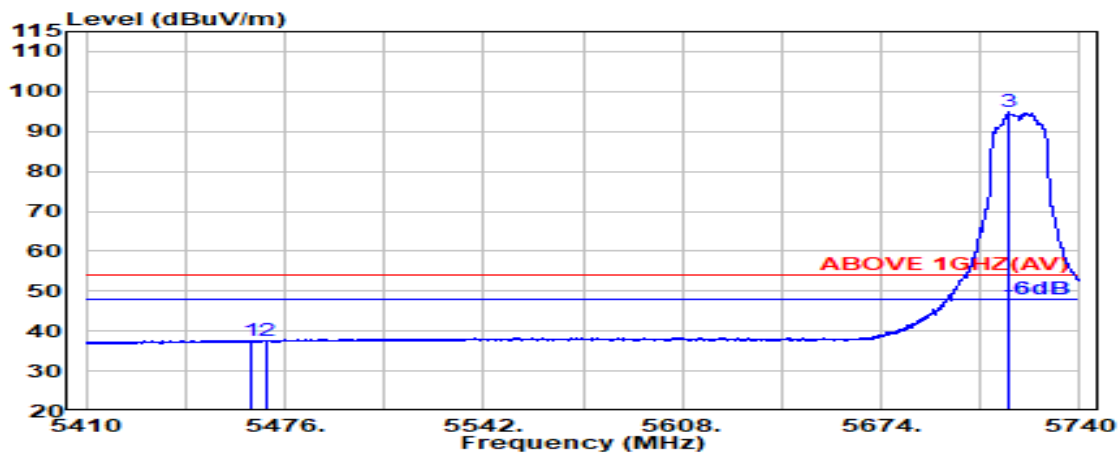


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.17	8.73	34.21	28.94	37.63	54.00	16.37	Average
5470.000	34.16	8.74	34.21	28.73	37.41	54.00	16.59	Average
@ 5716.200	33.80	8.88	34.30	86.41	94.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

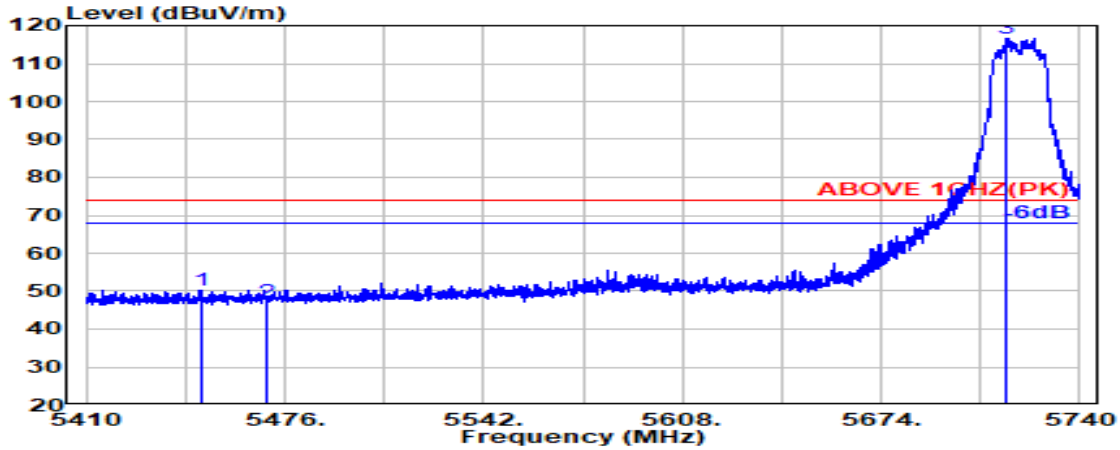

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.20	8.72	34.22	41.44	50.14	74.00	23.86	Peak
5470.000	34.16	8.74	34.21	38.62	47.30	74.00	26.70	Peak
@ 5715.700	33.80	8.88	34.30	108.29	116.67	---	---	Peak

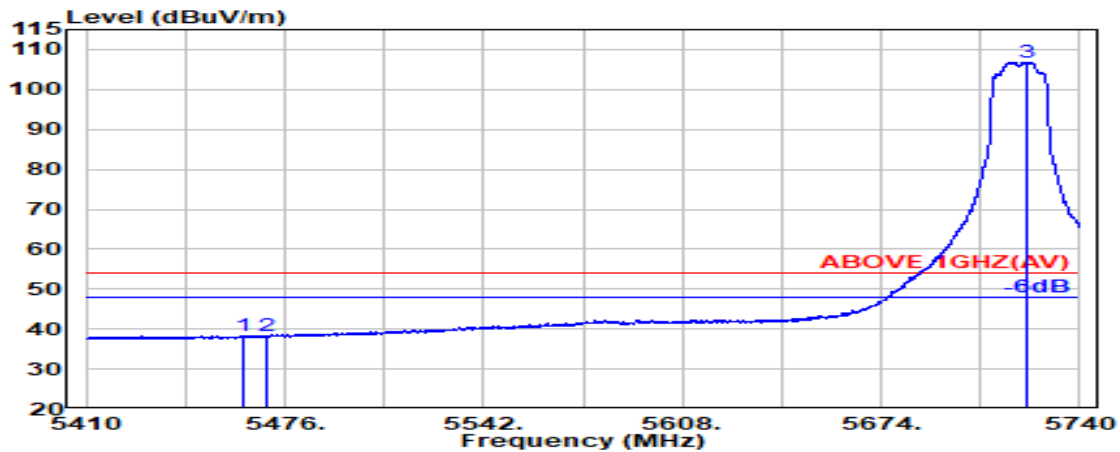


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.18	8.73	34.21	29.60	38.30	54.00	15.70	Average
5470.000	34.16	8.74	34.21	29.47	38.15	54.00	15.85	Average
@ 5722.800	33.80	8.88	34.30	98.55	106.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

## Antenna at Horizontal Polarization

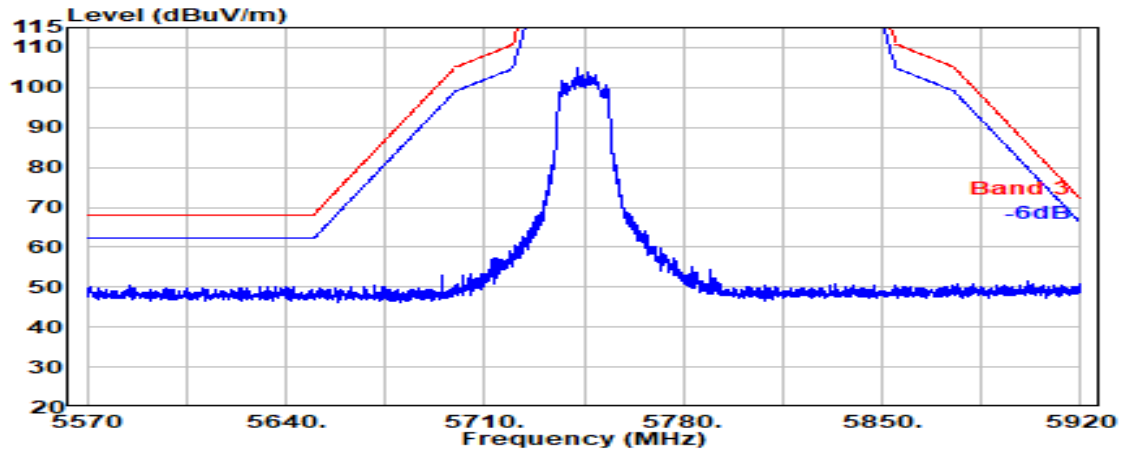


## Antenna at Vertical Polarization

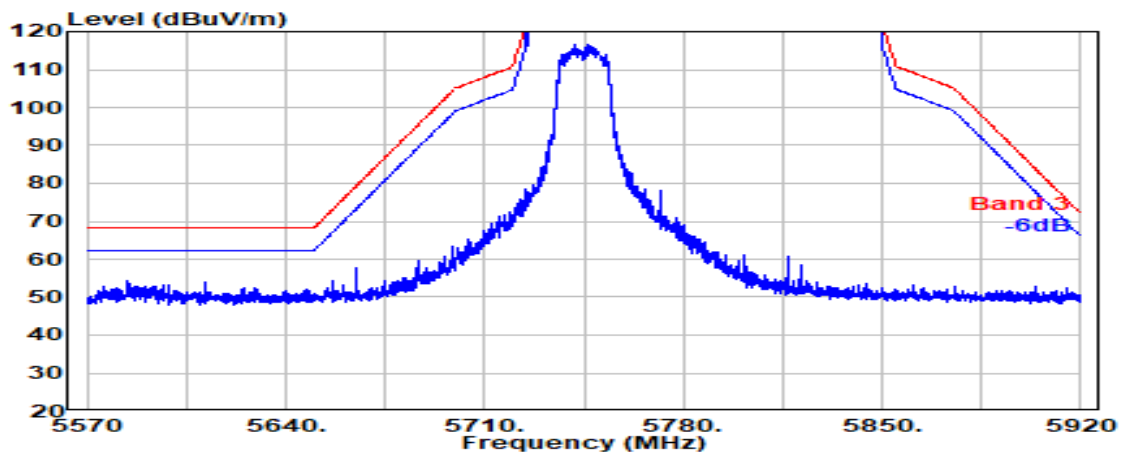


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

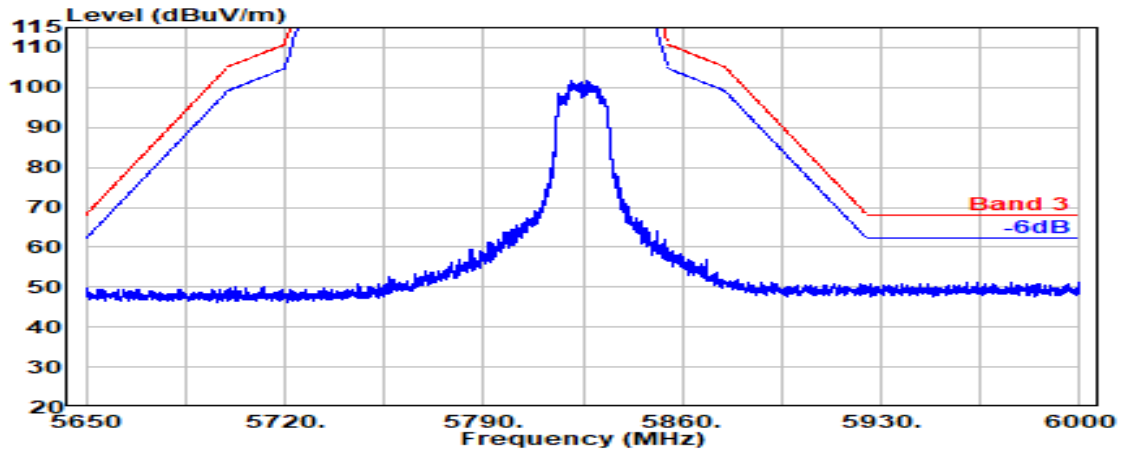

Antenna at Vertical Polarization

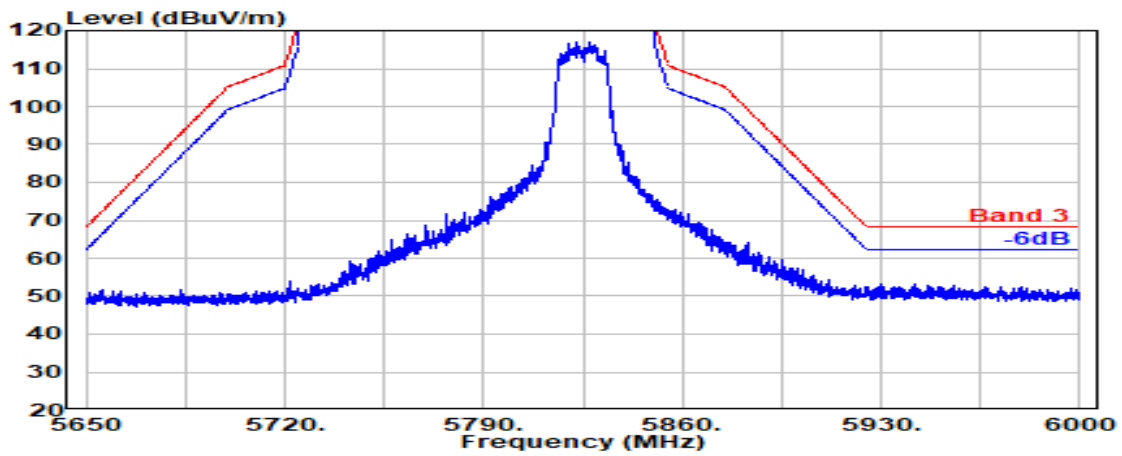


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

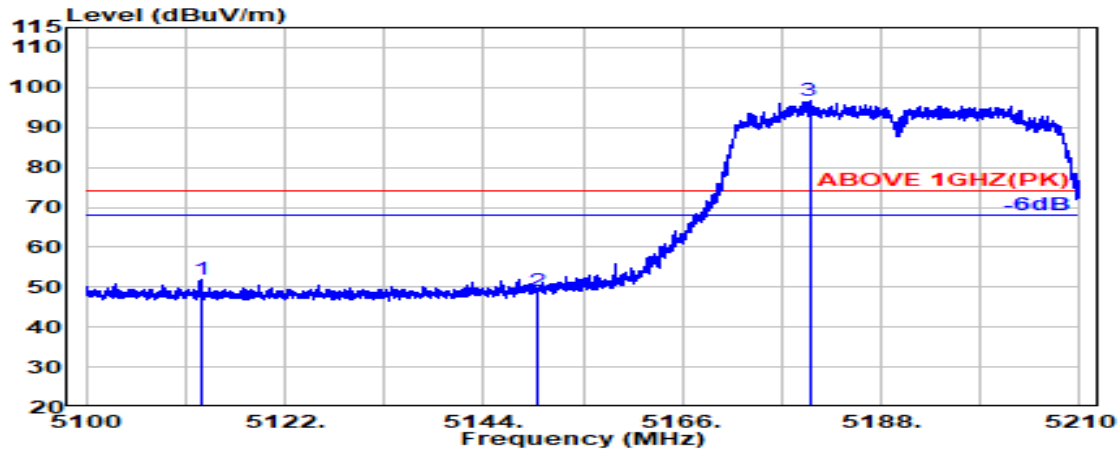

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.666	33.70	8.52	34.35	44.01	51.88	74.00	22.12	Peak
5150.000	33.70	8.54	34.34	41.27	49.17	74.00	24.83	Peak
@ 5180.080	33.70	8.56	34.33	88.69	96.63	---	---	Peak

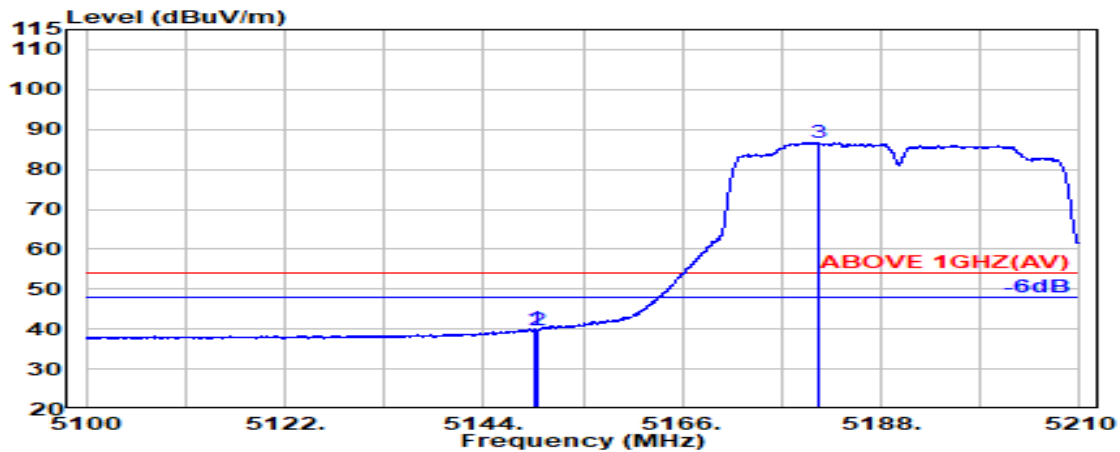


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.688	33.70	8.54	34.34	32.04	39.95	54.00	14.05	Average
5150.000	33.70	8.54	34.34	31.84	39.74	54.00	14.26	Average
@ 5181.086	33.70	8.56	34.33	78.87	86.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

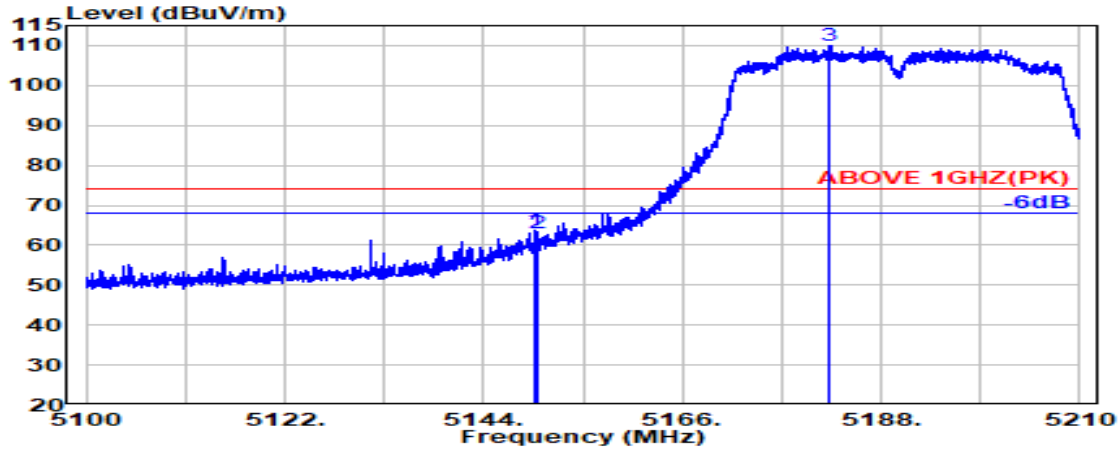

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.657	33.70	8.54	34.34	55.95	63.86	74.00	10.14	Peak
5150.000	33.70	8.54	34.34	55.14	63.05	74.00	10.95	Peak
@ 5182.217	33.70	8.56	34.32	102.04	109.98	---	---	Peak

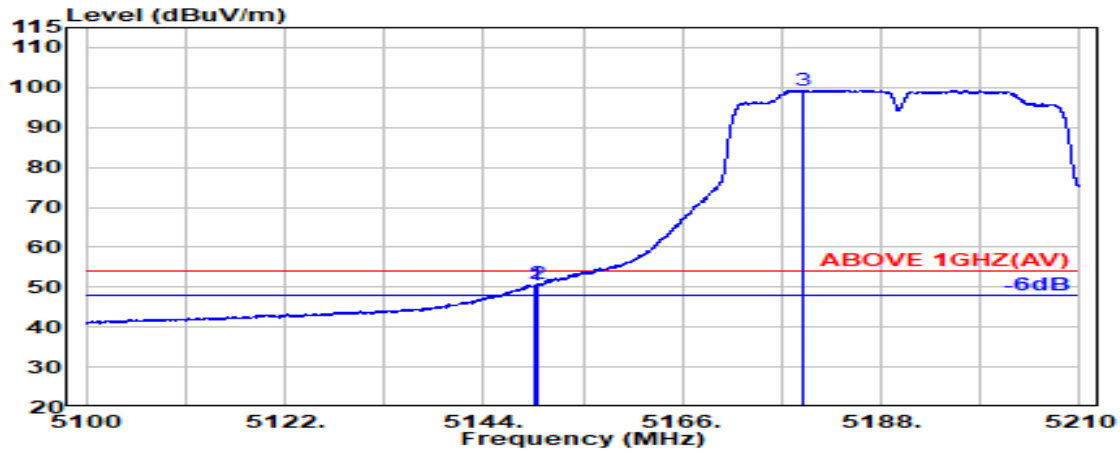


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.563	33.70	8.54	34.34	42.67	50.57	54.00	3.43	Average
5150.000	33.70	8.54	34.34	42.77	50.68	54.00	3.32	Average
@ 5179.483	33.70	8.56	34.33	91.43	99.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

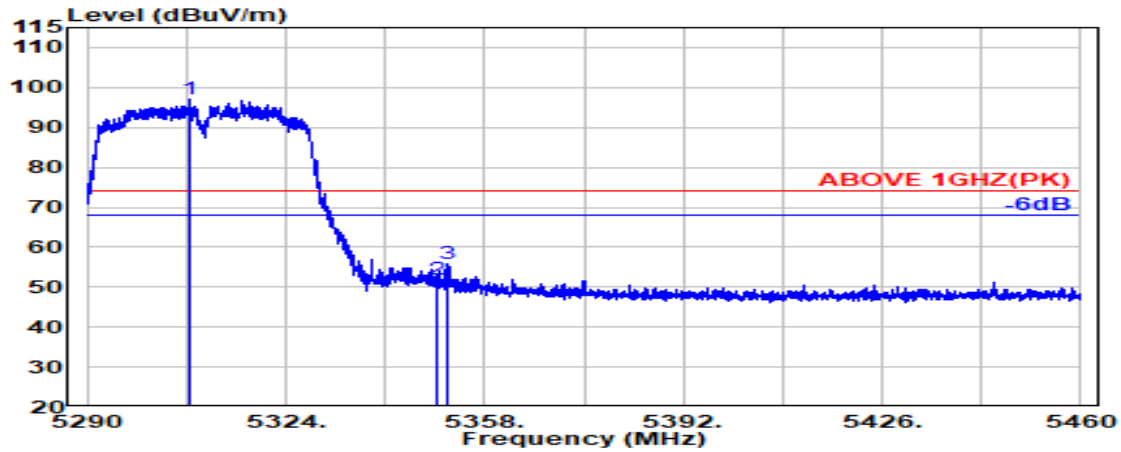

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.680	34.07	8.64	34.27	88.65	97.09	---	---	Peak
5350.000	33.90	8.67	34.26	43.75	52.06	74.00	21.94	Peak
5351.832	33.91	8.67	34.26	47.50	55.81	74.00	18.19	Peak

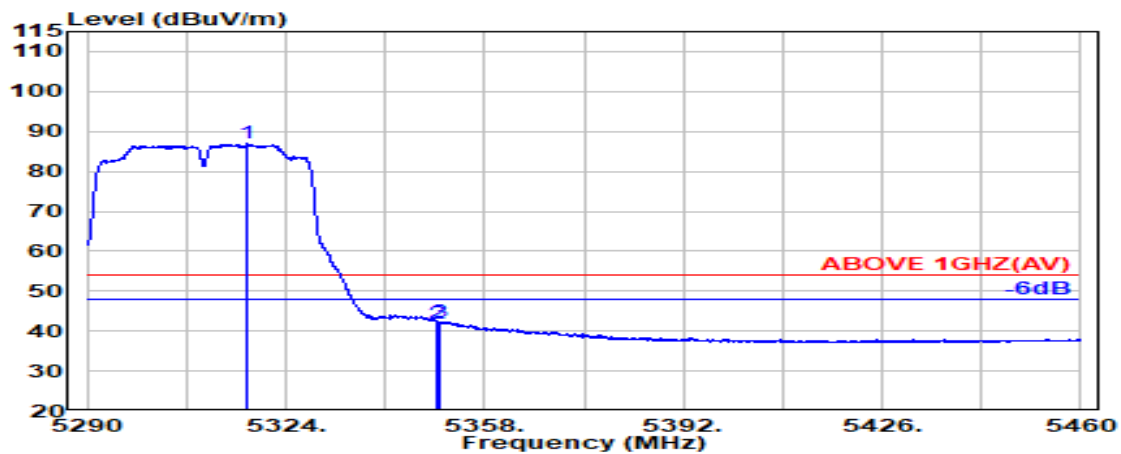


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.491	34.03	8.65	34.27	78.47	86.87	---	---	Average
5350.000	33.90	8.67	34.26	33.74	42.04	54.00	11.96	Average
5350.471	33.90	8.67	34.26	34.07	42.38	54.00	11.62	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

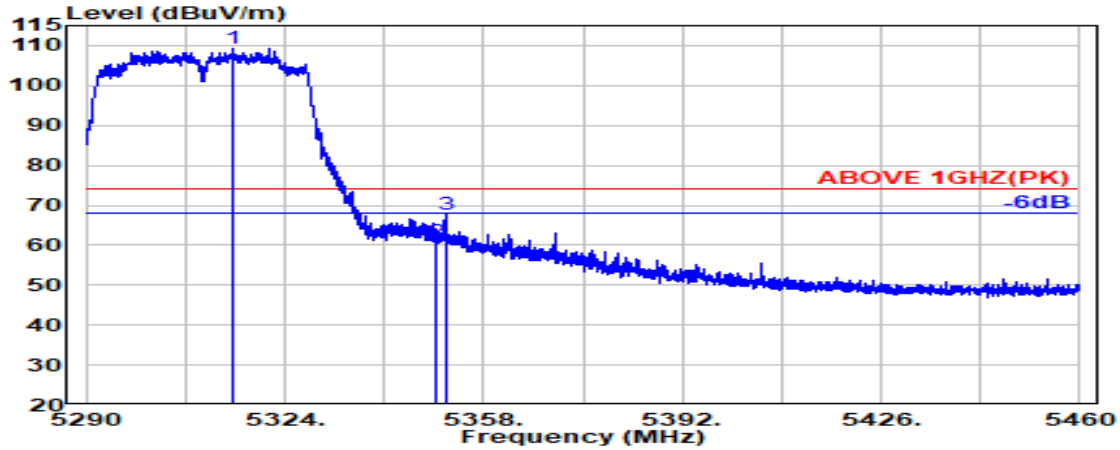

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.966	34.04	8.64	34.27	100.95	109.37	---	---	Peak
5350.000	33.90	8.67	34.26	52.71	61.01	74.00	12.99	Peak
5351.734	33.91	8.67	34.26	59.35	67.67	74.00	6.33	Peak

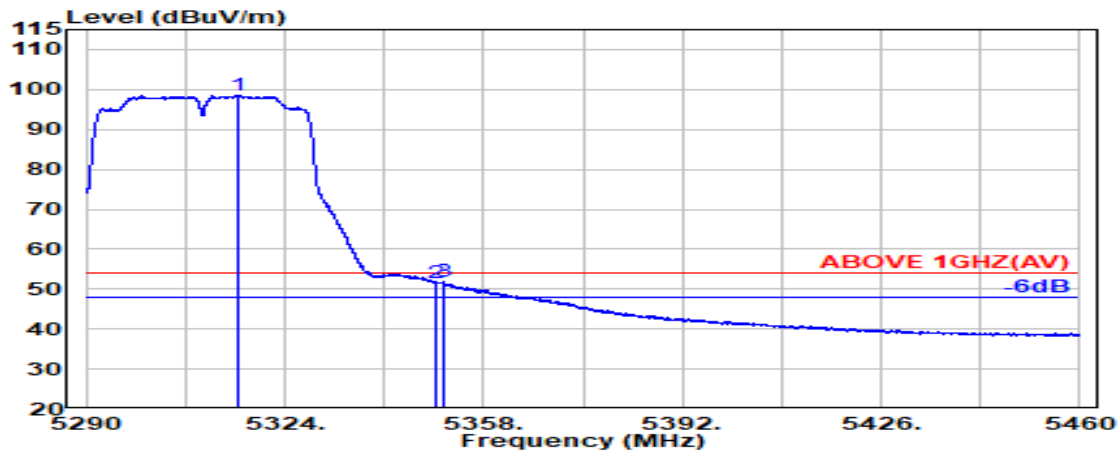


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.034	34.04	8.64	34.27	90.04	98.45	---	---	Average
5350.000	33.90	8.67	34.26	43.22	51.53	54.00	2.47	Average
5351.103	33.90	8.67	34.26	43.47	51.78	54.00	2.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

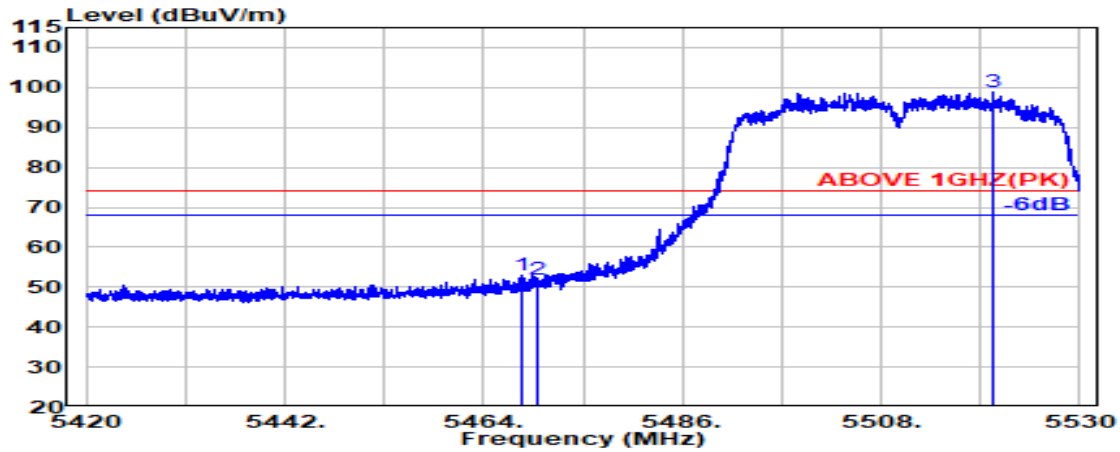

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.243	34.16	8.73	34.21	44.18	52.86	74.00	21.14	Peak
5470.000	34.16	8.74	34.21	43.36	52.04	74.00	21.96	Peak
@ 5520.477	34.10	8.77	34.21	90.22	98.88	---	---	Peak

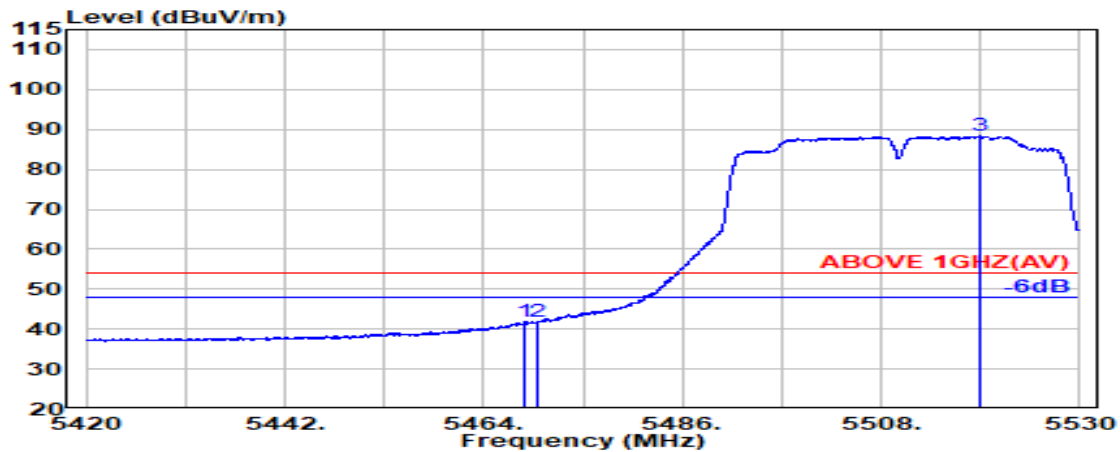


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.651	34.16	8.74	34.21	33.19	41.88	54.00	12.12	Average
5470.000	34.16	8.74	34.21	33.05	41.73	54.00	12.27	Average
@ 5518.875	34.10	8.76	34.21	79.68	88.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

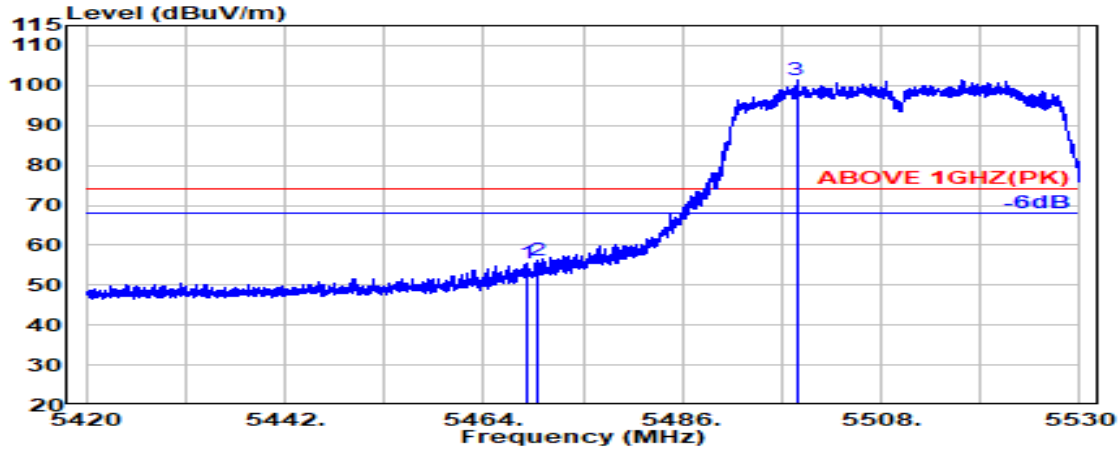

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.872	34.16	8.74	34.21	46.84	55.52	74.00	18.48	Peak
5470.000	34.16	8.74	34.21	47.34	56.03	74.00	17.97	Peak
@ 5498.634	34.10	8.75	34.20	92.64	101.30	---	---	Peak

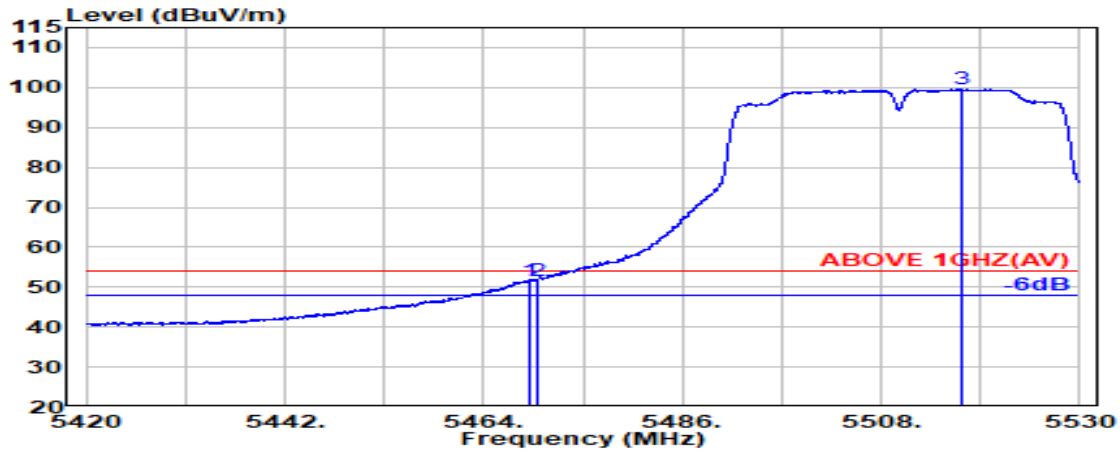


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.997	34.16	8.74	34.21	42.99	51.68	54.00	2.32	Average
5470.000	34.16	8.74	34.21	42.97	51.66	54.00	2.34	Average
@ 5516.894	34.10	8.76	34.21	90.95	99.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

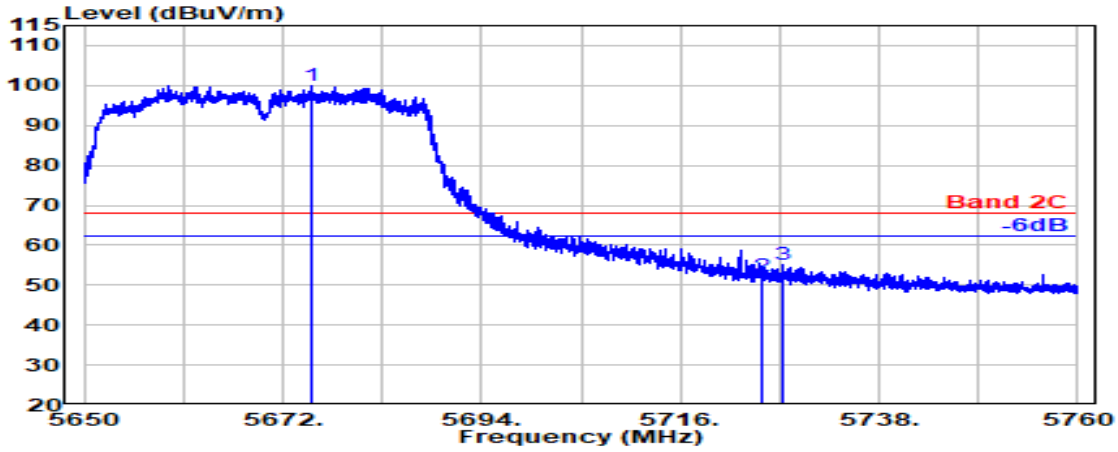

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.269	33.90	8.85	34.28	91.58	100.05	---	---	Peak
5725.000	33.80	8.88	34.31	43.79	52.16	68.20	16.04	Peak
5727.314	33.80	8.88	34.31	46.82	55.19	68.20	13.01	Peak

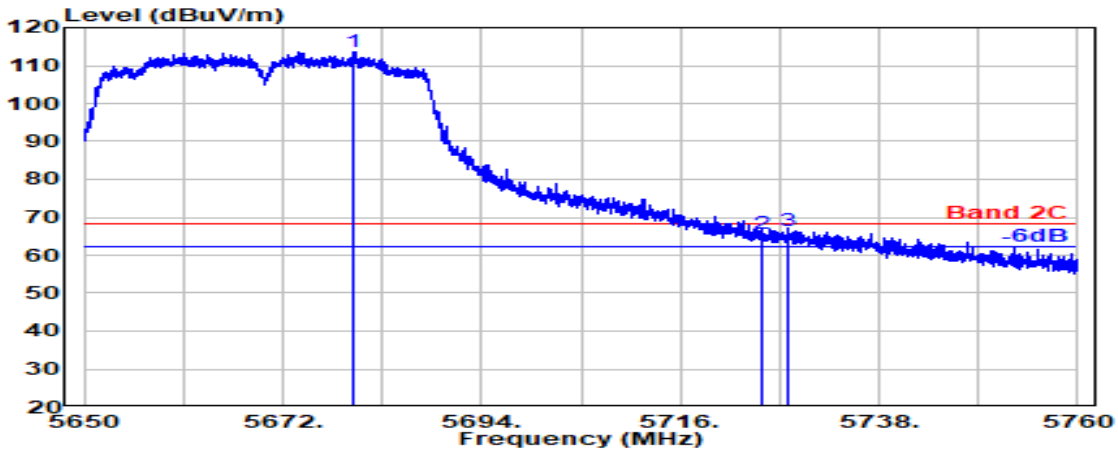


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.731	33.88	8.86	34.29	105.10	113.56	---	---	Peak
5725.000	33.80	8.88	34.31	57.34	65.72	68.20	2.48	Peak
5727.880	33.80	8.88	34.31	58.04	66.41	68.20	1.79	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

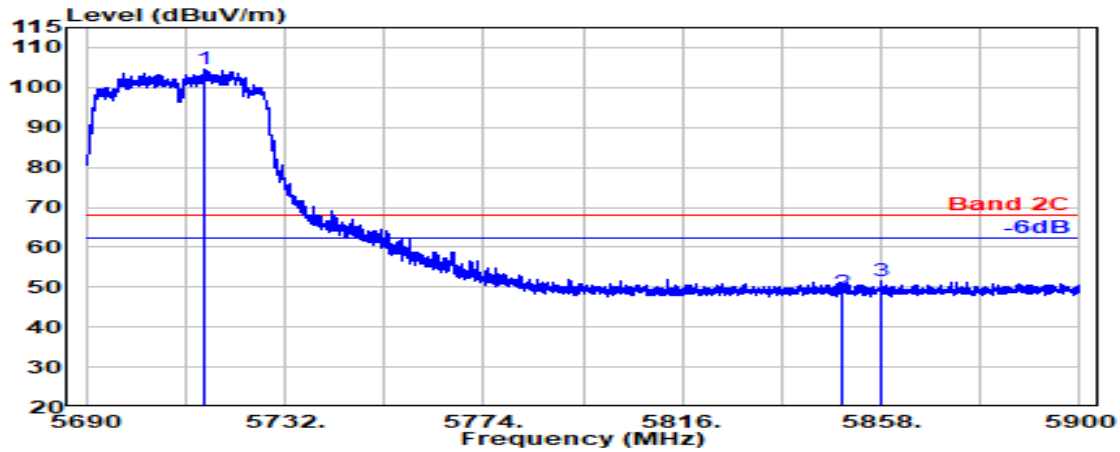

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.960	33.80	8.88	34.30	96.17	104.54	---	---	Peak
5850.000	34.10	8.95	34.36	40.12	48.81	68.20	19.39	Peak
5857.940	34.10	8.95	34.37	42.74	51.43	68.20	16.77	Peak

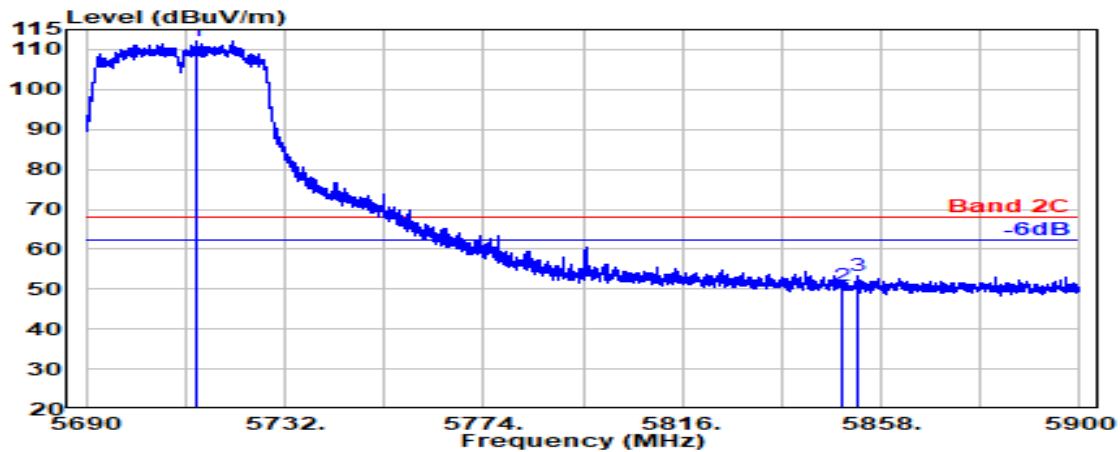


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.520	33.80	8.87	34.30	103.66	112.03	---	---	Peak
5850.000	34.10	8.95	34.36	42.10	50.79	68.20	17.41	Peak
5852.900	34.10	8.95	34.36	44.64	53.32	68.20	14.88	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

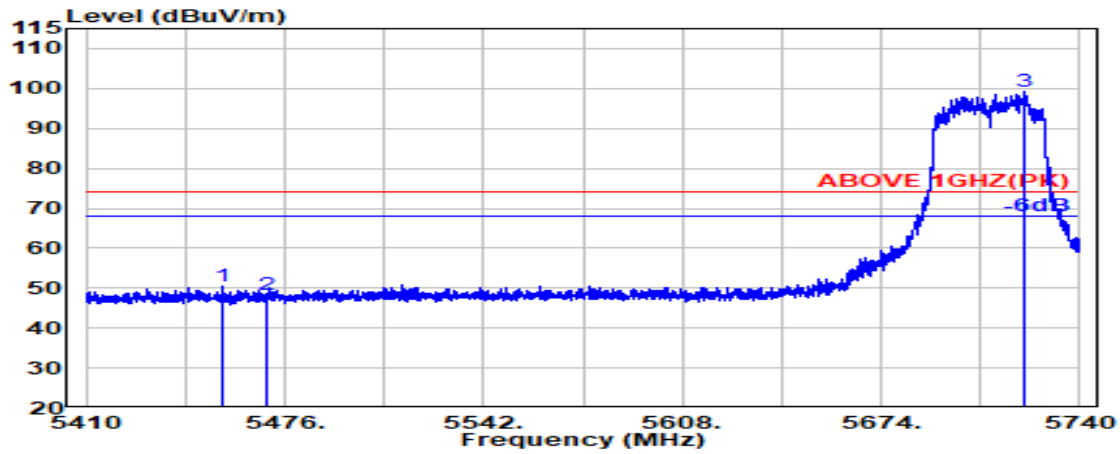

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.352	34.19	8.73	34.22	41.70	50.40	74.00	23.60	Peak
5470.000	34.16	8.74	34.21	39.76	48.44	74.00	25.56	Peak
@ 5721.520	33.80	8.88	34.30	90.87	99.24	---	---	Peak

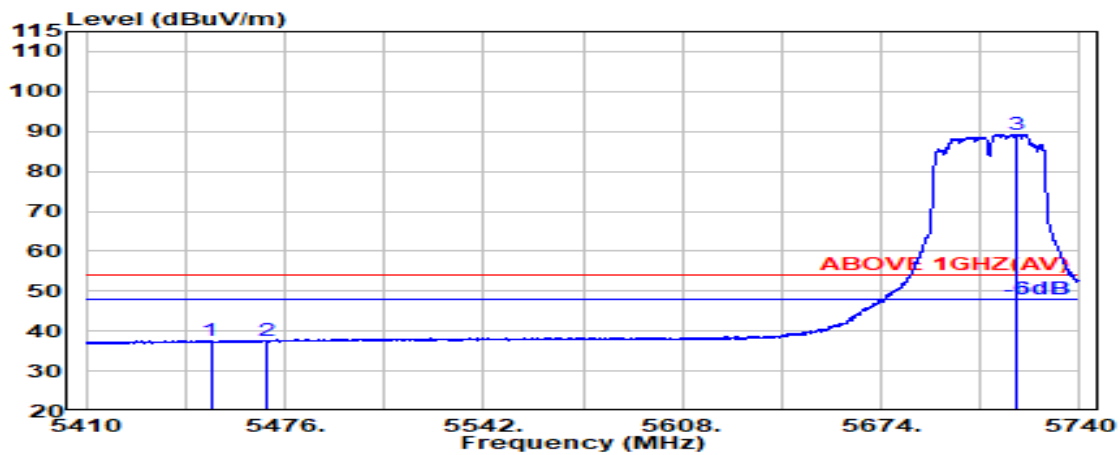


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.392	34.20	8.72	34.22	29.01	37.72	54.00	16.28	Average
5470.000	34.16	8.74	34.21	28.86	37.55	54.00	16.45	Average
@ 5718.691	33.80	8.88	34.30	80.99	89.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

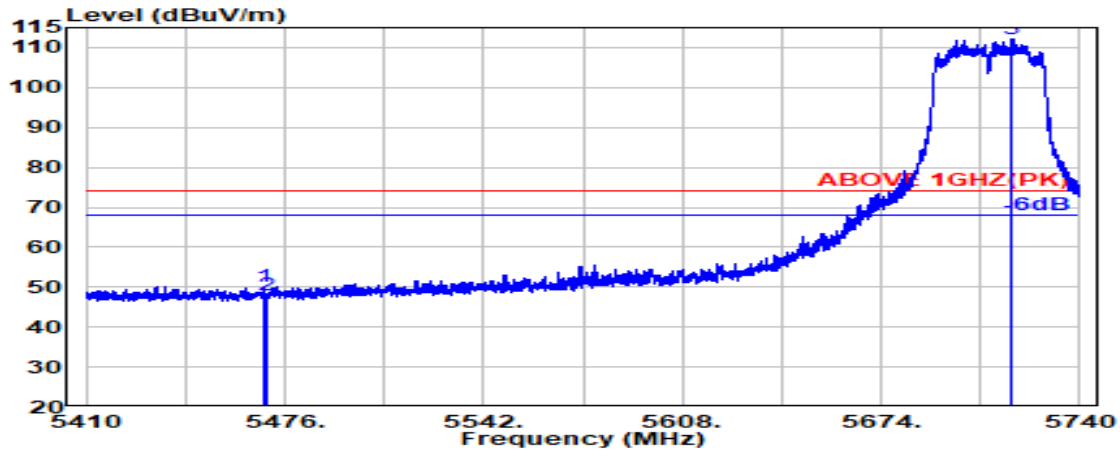

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.834	34.16	8.74	34.21	41.48	50.16	74.00	23.84	Peak
5470.000	34.16	8.74	34.21	39.24	47.92	74.00	26.08	Peak
@ 5717.560	33.80	8.88	34.30	103.63	112.00	---	---	Peak

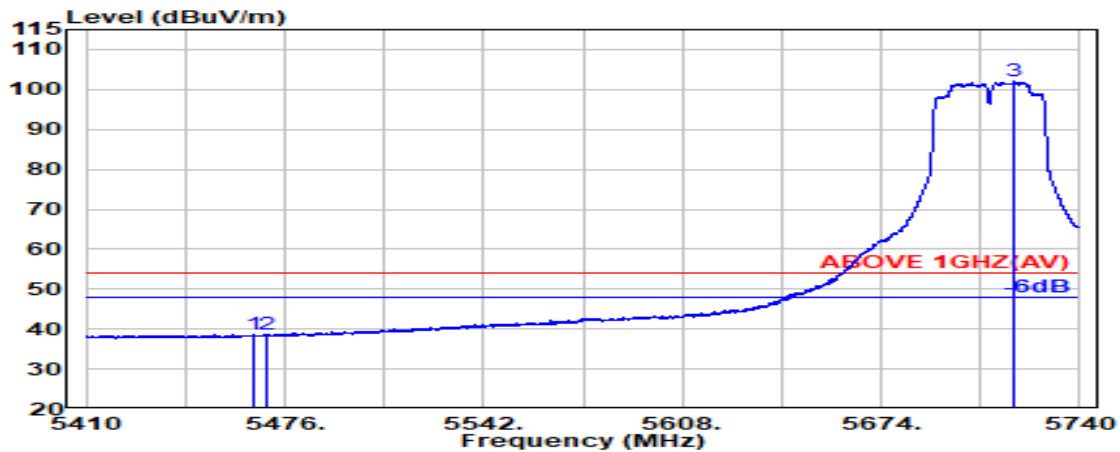


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.912	34.17	8.73	34.21	29.91	38.60	54.00	15.40	Average
5470.000	34.16	8.74	34.21	29.88	38.56	54.00	15.44	Average
@ 5718.314	33.80	8.88	34.30	93.55	101.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

## Antenna at Horizontal Polarization

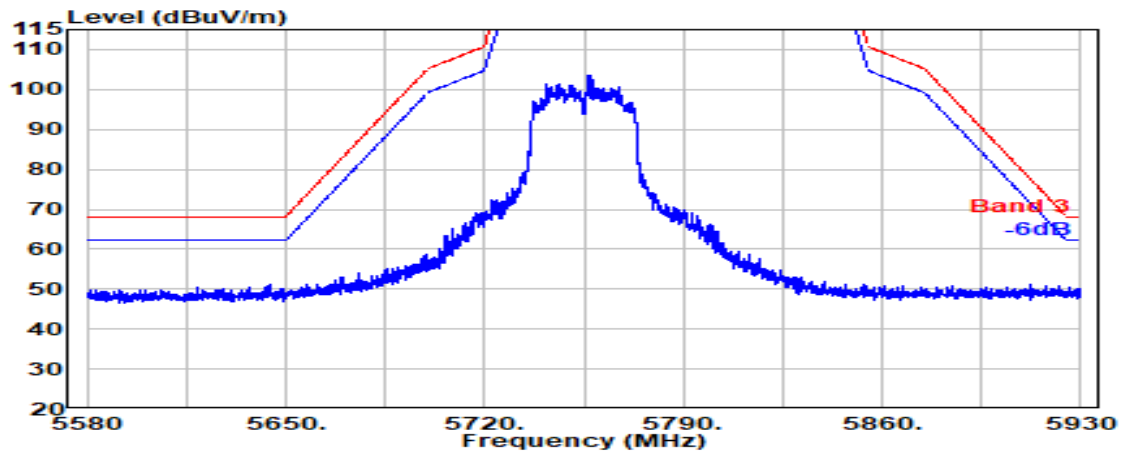


## Antenna at Vertical Polarization

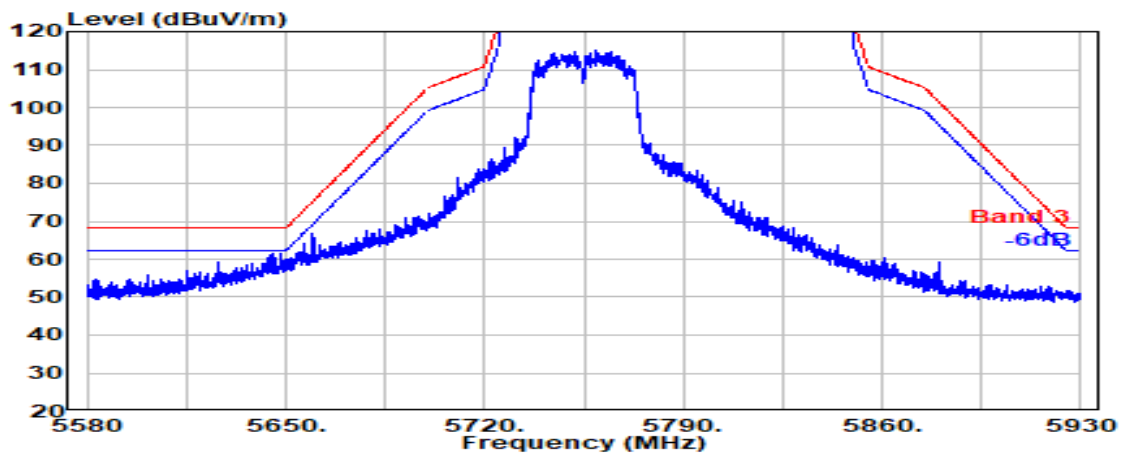




Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

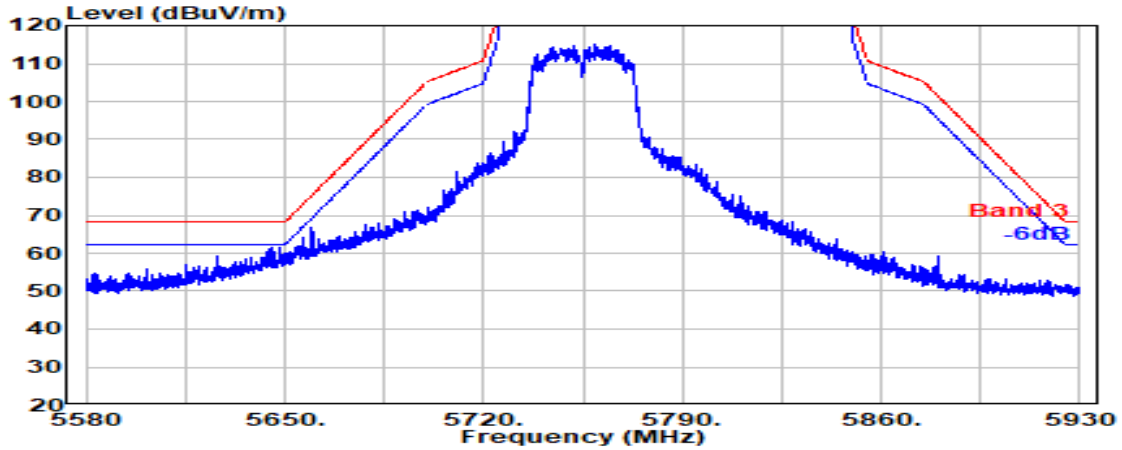

Antenna at Vertical Polarization

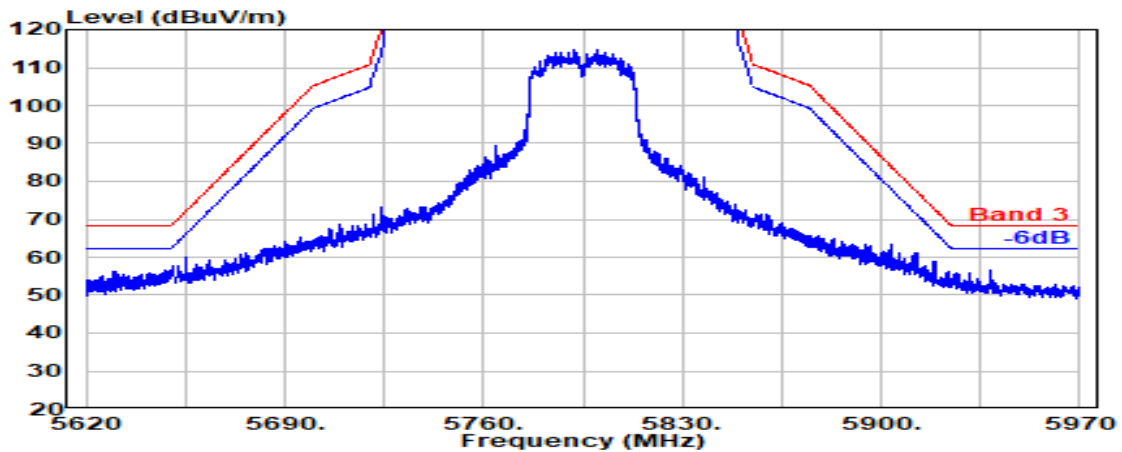


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

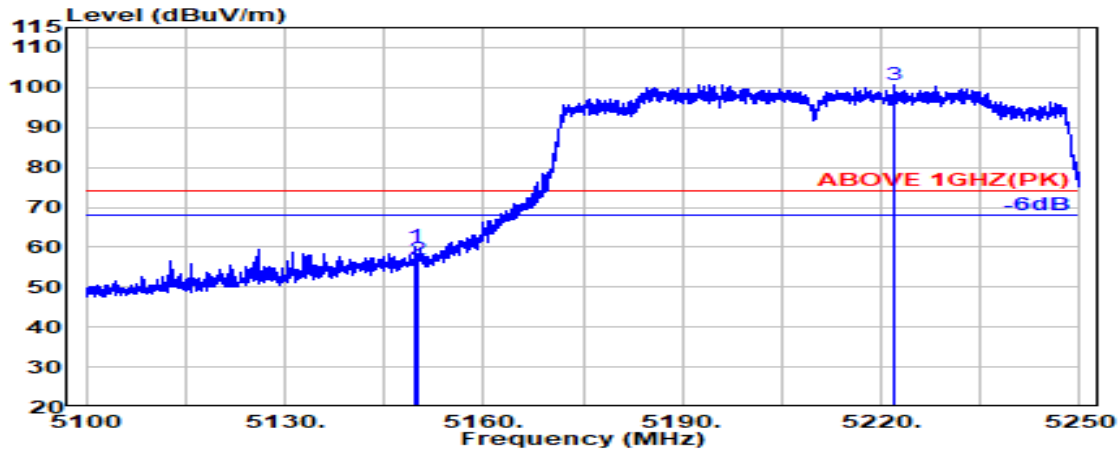

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.586	33.70	8.54	34.34	52.30	60.21	74.00	13.79	Peak
5150.000	33.70	8.54	34.34	49.10	57.01	74.00	16.99	Peak
@ 5222.100	33.74	8.59	34.31	92.66	100.68	---	---	Peak

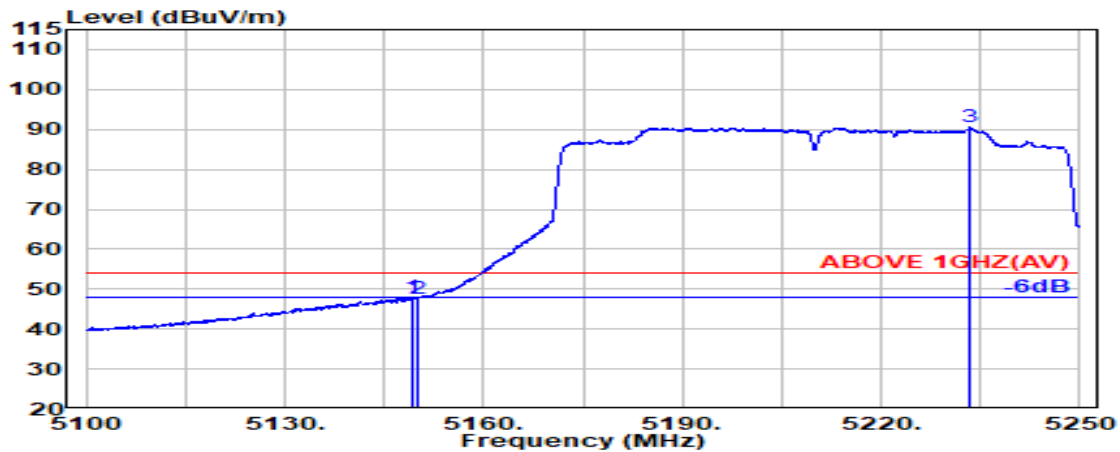


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.372	33.70	8.54	34.34	40.06	47.97	54.00	6.03	Average
5150.000	33.70	8.54	34.34	39.72	47.62	54.00	6.38	Average
@ 5233.372	33.77	8.60	34.30	82.50	90.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

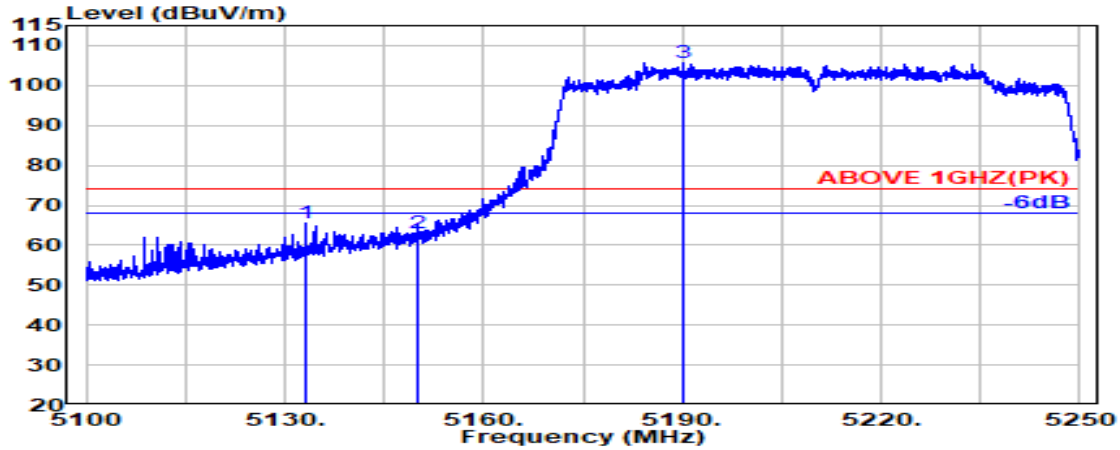

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.257	33.70	8.53	34.34	57.50	65.39	74.00	8.61	Peak
5150.000	33.70	8.54	34.34	55.28	63.18	74.00	10.82	Peak
@ 5190.214	33.70	8.57	34.32	97.75	105.69	---	---	Peak

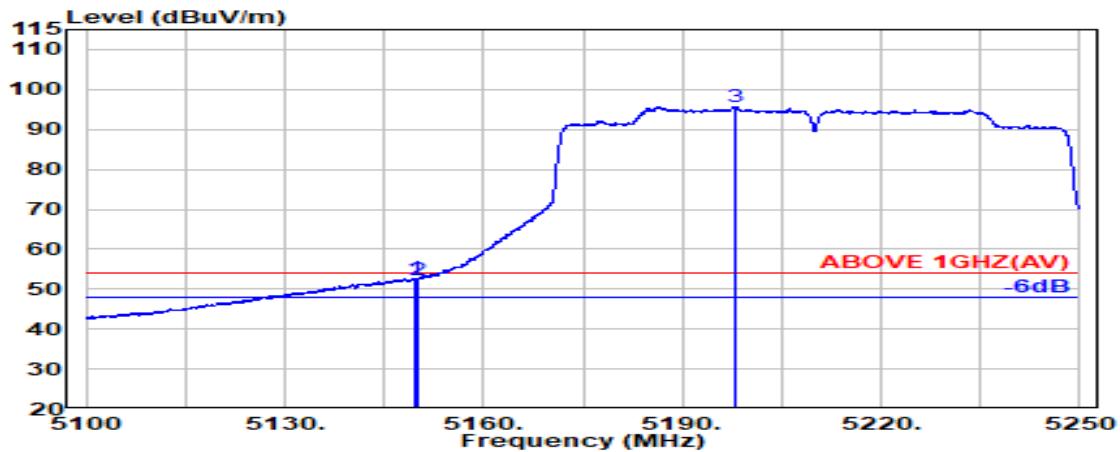


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.714	33.70	8.54	34.34	44.55	52.46	54.00	1.54	Average
5150.000	33.70	8.54	34.34	44.51	52.42	54.00	1.58	Average
@ 5197.843	33.70	8.57	34.32	87.77	95.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

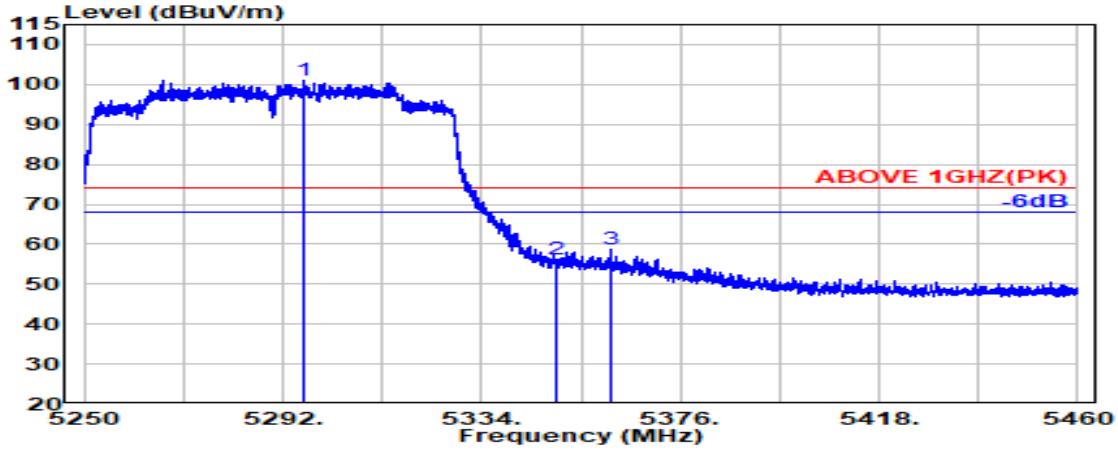

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5296.200	34.08	8.63	34.28	92.71	101.14	---	---	Peak
5350.000	33.90	8.67	34.26	47.76	56.07	74.00	17.93	Peak
5361.300	33.95	8.67	34.25	50.38	58.75	74.00	15.25	Peak

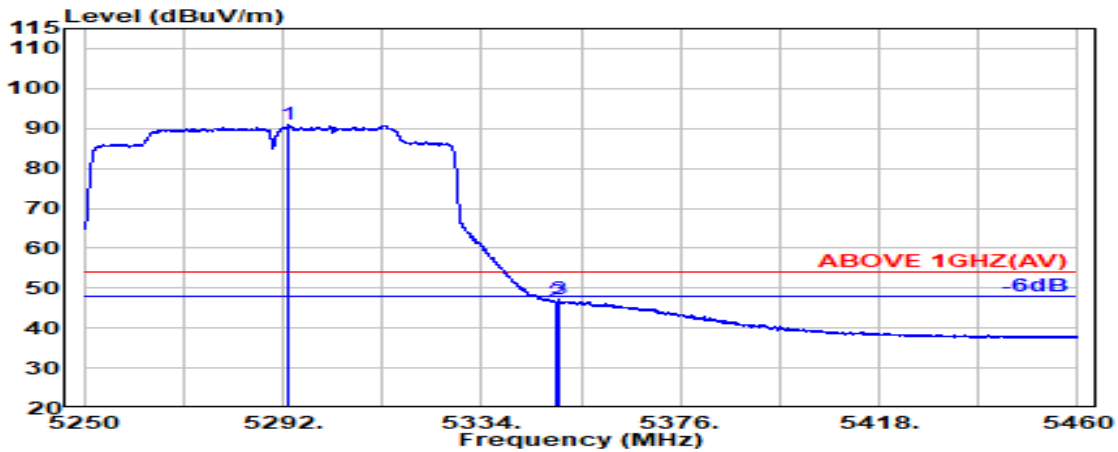


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.320	34.06	8.63	34.28	82.49	90.90	---	---	Average
5350.000	33.90	8.67	34.26	38.21	46.52	54.00	7.48	Average
5350.560	33.90	8.67	34.26	38.78	47.09	54.00	6.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

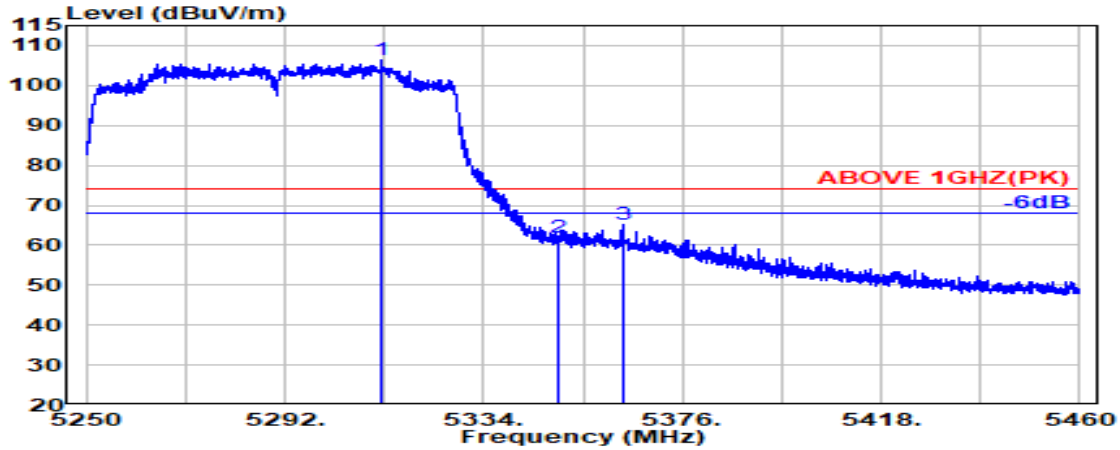

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.400	34.05	8.64	34.27	97.81	106.23	---	---	Peak
5350.000	33.90	8.67	34.26	53.65	61.96	74.00	12.04	Peak
5363.400	33.95	8.67	34.25	56.71	65.09	74.00	8.91	Peak

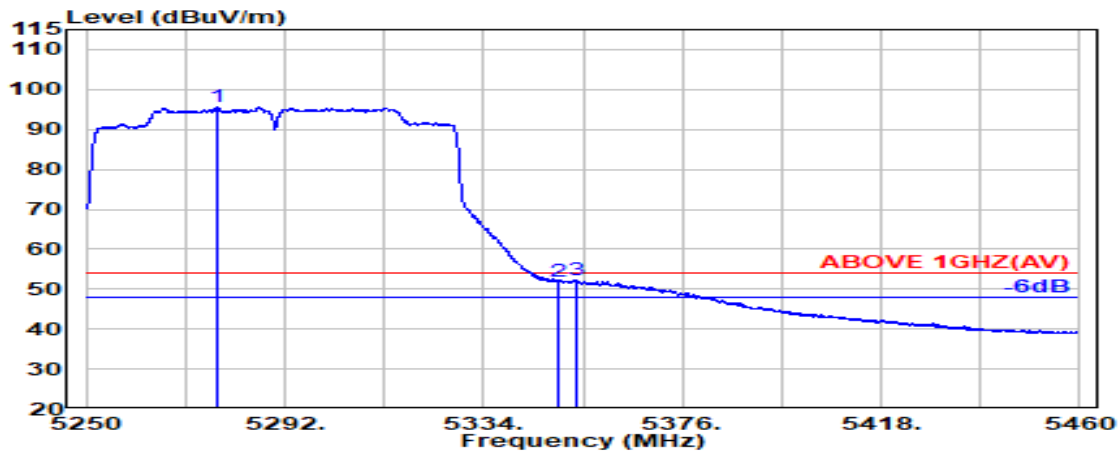


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.720	33.97	8.62	34.29	87.36	95.66	---	---	Average
5350.000	33.90	8.67	34.26	43.60	51.91	54.00	2.09	Average
5353.380	33.91	8.67	34.26	43.85	52.17	54.00	1.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

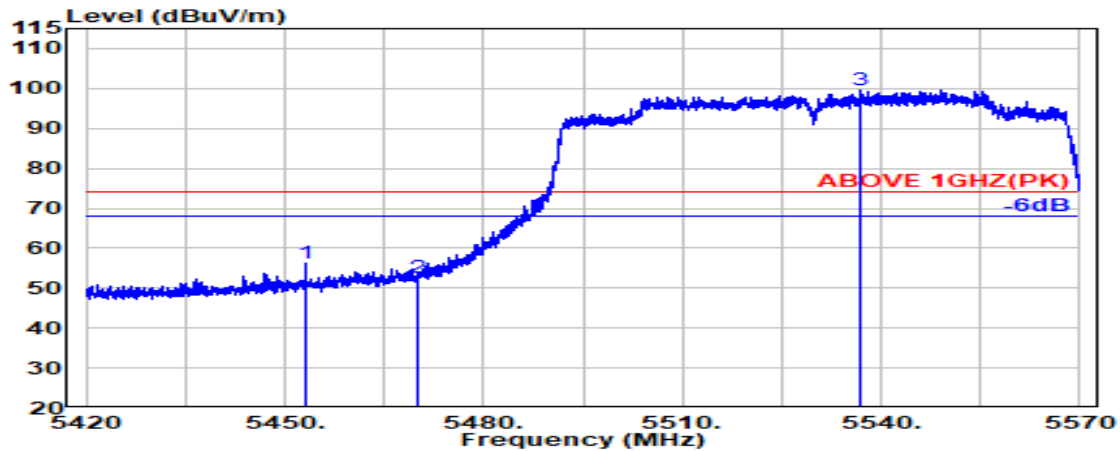

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.043	34.19	8.73	34.22	47.51	56.21	74.00	17.79	Peak
5470.000	34.16	8.74	34.21	43.95	52.63	74.00	21.37	Peak
@ 5536.786	34.10	8.77	34.22	90.83	99.49	---	---	Peak

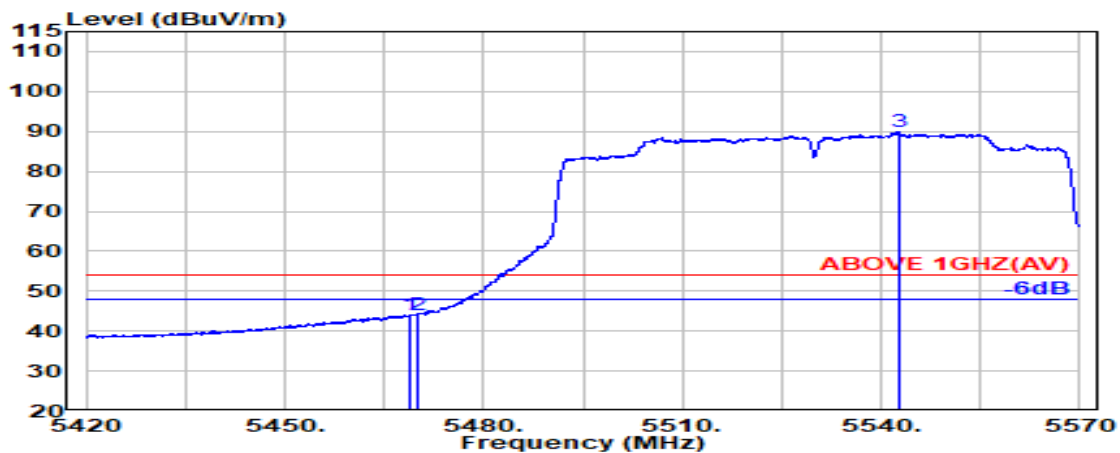


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.943	34.16	8.74	34.21	35.31	44.00	54.00	10.00	Average
5470.000	34.16	8.74	34.21	35.51	44.20	54.00	9.80	Average
@ 5542.571	34.10	8.78	34.22	81.18	89.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

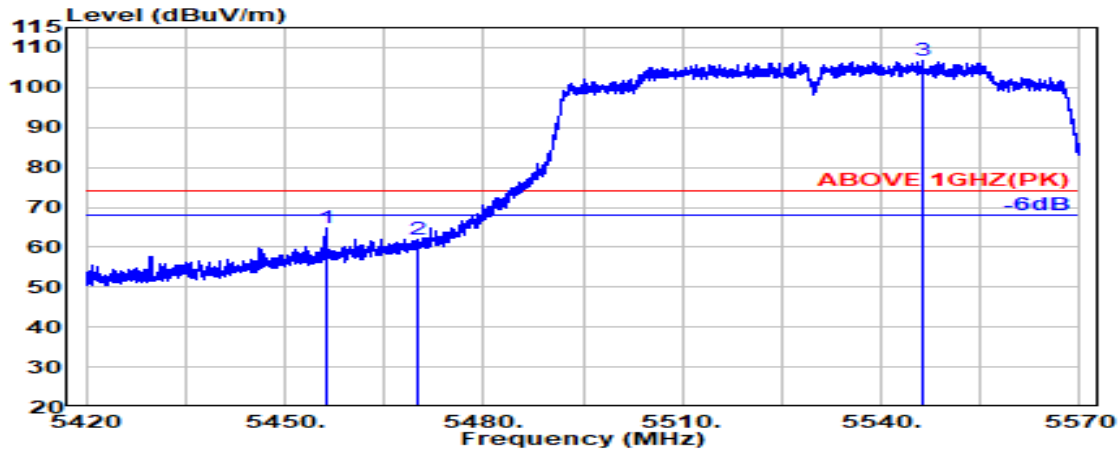

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.128	34.19	8.73	34.22	55.95	64.65	74.00	9.35	Peak
5470.000	34.16	8.74	34.21	53.11	61.79	74.00	12.21	Peak
@ 5546.171	34.10	8.78	34.22	98.18	106.84	---	---	Peak

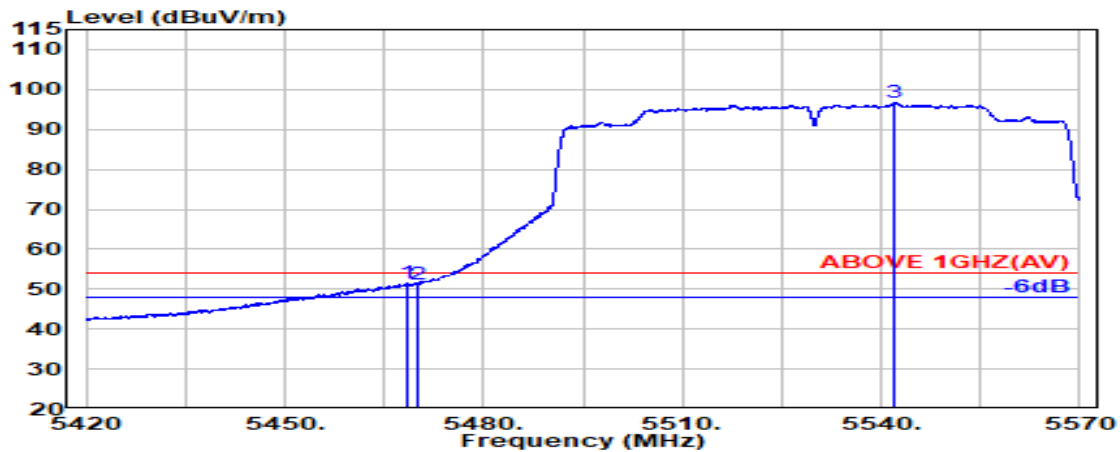


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.21	42.71	51.39	54.00	2.61	Average
5470.000	34.16	8.74	34.21	42.60	51.29	54.00	2.71	Average
@ 5542.143	34.10	8.78	34.22	87.94	96.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

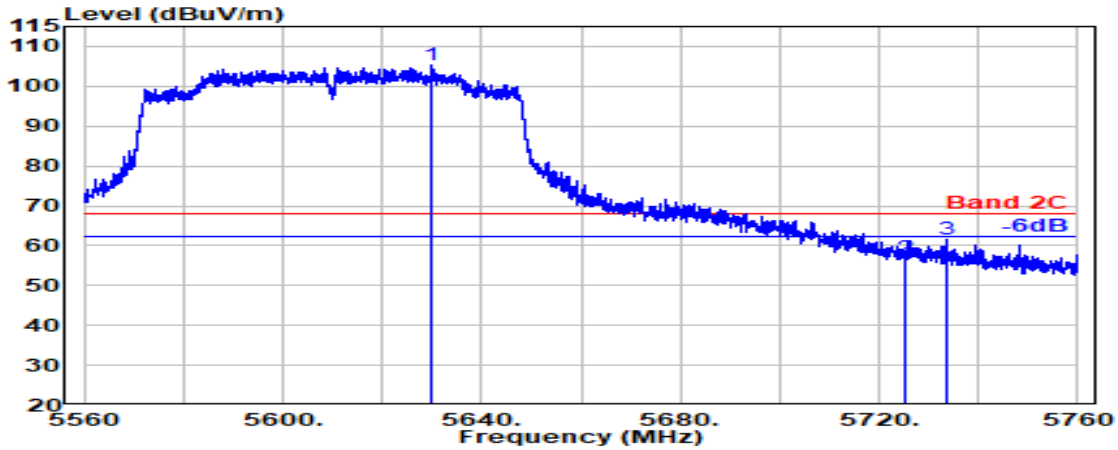

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5629.943	34.00	8.83	34.26	96.89	105.46	---	---	Peak
5725.000	33.80	8.88	34.31	48.46	56.84	68.20	11.36	Peak
5733.714	33.80	8.89	34.31	53.13	61.51	68.20	6.69	Peak

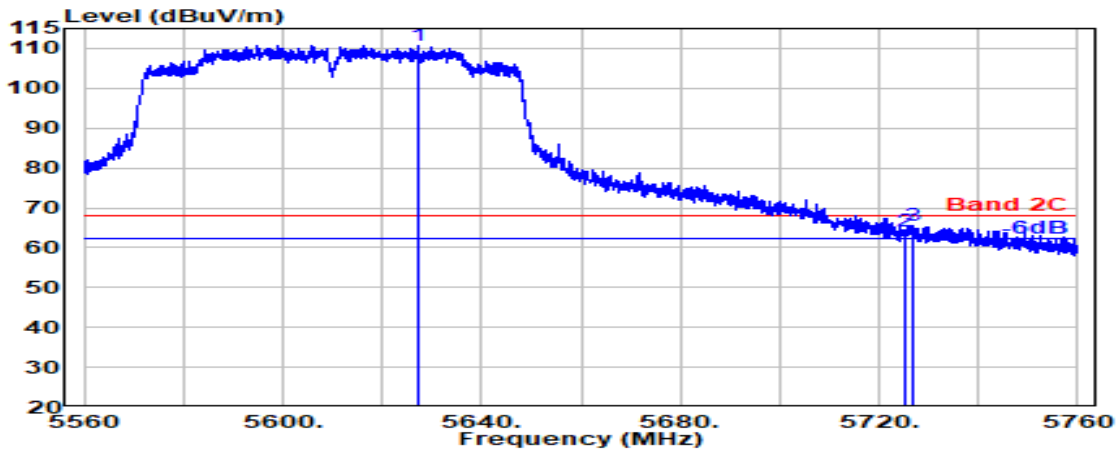


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5627.257	34.00	8.83	34.26	102.26	110.83	---	---	Peak
5725.000	33.80	8.88	34.31	55.80	64.17	68.20	4.03	Peak
5726.628	33.80	8.88	34.31	57.14	65.52	68.20	2.68	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

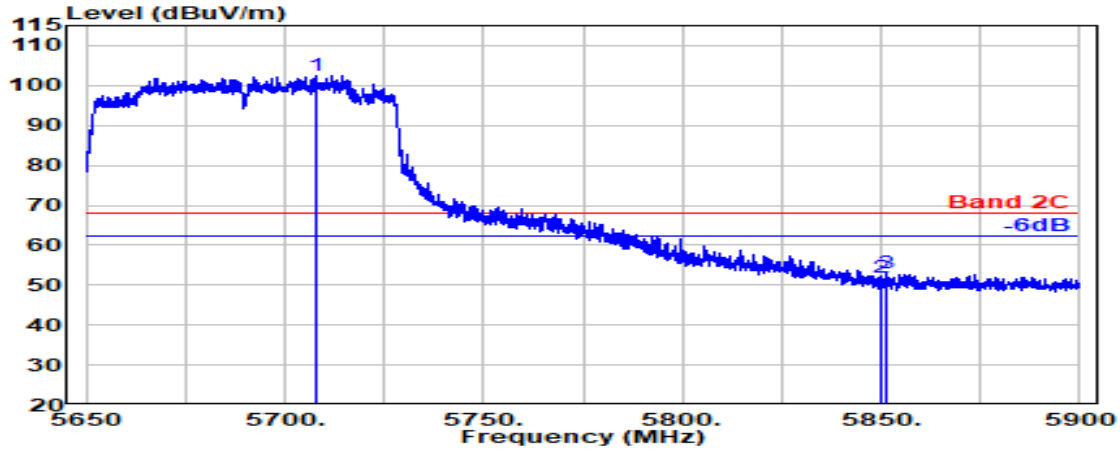

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.071	33.80	8.87	34.30	94.22	102.60	---	---	Peak
5850.000	34.10	8.95	34.36	43.10	51.79	68.20	16.41	Peak
5851.214	34.10	8.95	34.36	44.14	52.82	68.20	15.38	Peak

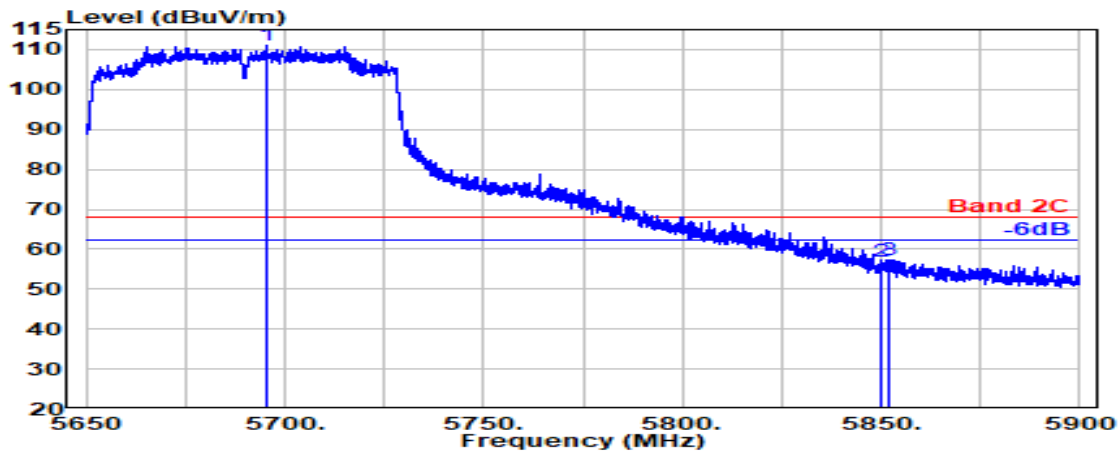


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.214	33.82	8.86	34.29	102.78	111.17	---	---	Peak
5850.000	34.10	8.95	34.36	48.24	56.93	68.20	11.27	Peak
5852.071	34.10	8.95	34.36	48.67	57.36	68.20	10.84	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

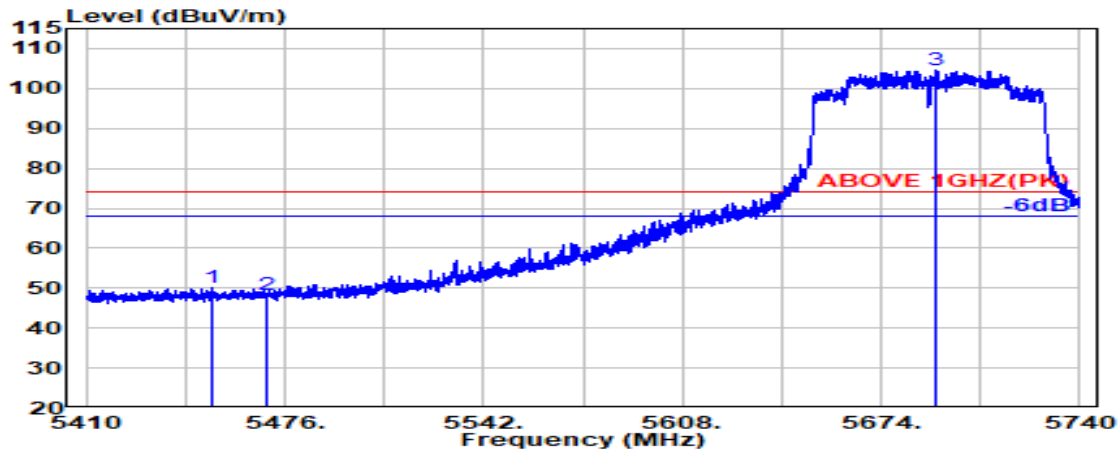

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.051	34.20	8.73	34.22	41.51	50.21	74.00	23.79	Peak
5470.000	34.16	8.74	34.21	39.55	48.23	74.00	25.77	Peak
@ 5692.103	33.83	8.86	34.29	96.16	104.56	---	---	Peak

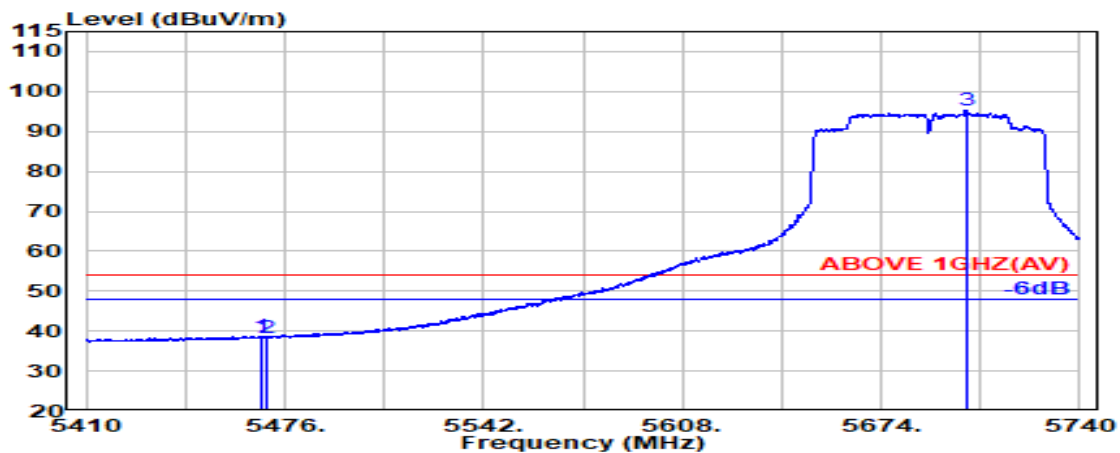


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.646	34.16	8.74	34.21	29.97	38.66	54.00	15.34	Average
5470.000	34.16	8.74	34.21	29.73	38.41	54.00	15.59	Average
@ 5702.191	33.80	8.87	34.30	86.94	95.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

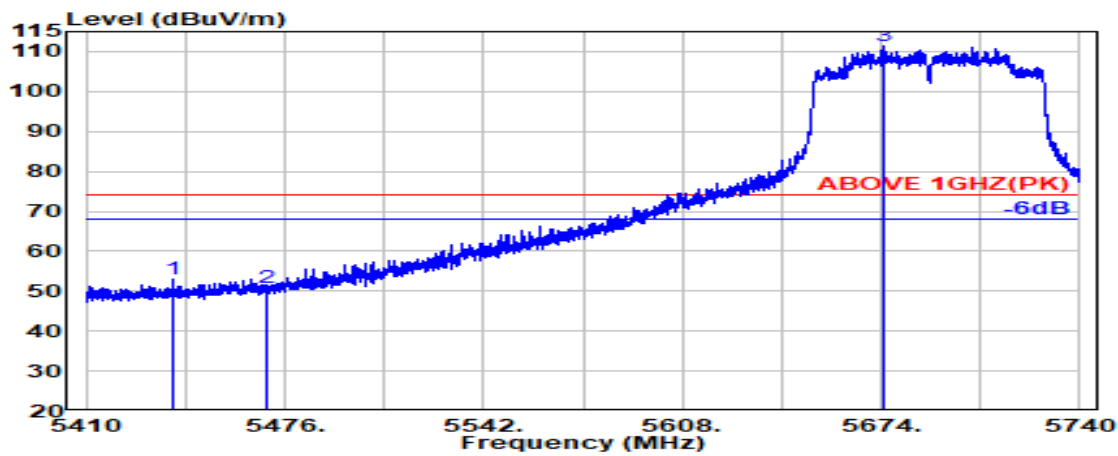

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5438.568	34.18	8.72	34.22	44.22	52.89	74.00	21.11	Peak
5470.000	34.16	8.74	34.21	42.29	50.97	74.00	23.03	Peak
@ 5674.471	33.90	8.85	34.28	102.90	111.37	---	---	Peak

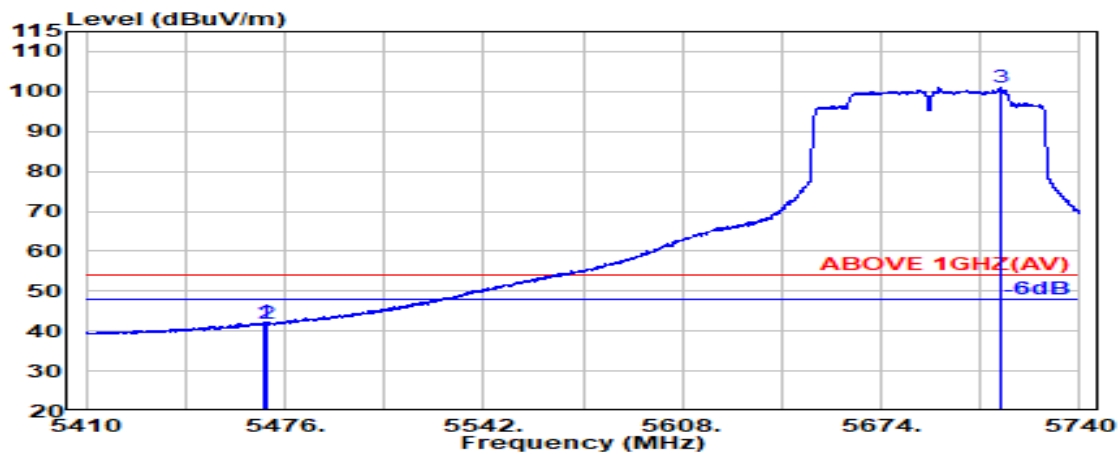


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.023	34.16	8.74	34.21	33.39	42.08	54.00	11.92	Average
5470.000	34.16	8.74	34.21	33.05	41.74	54.00	12.26	Average
@ 5713.506	33.80	8.87	34.30	92.57	100.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

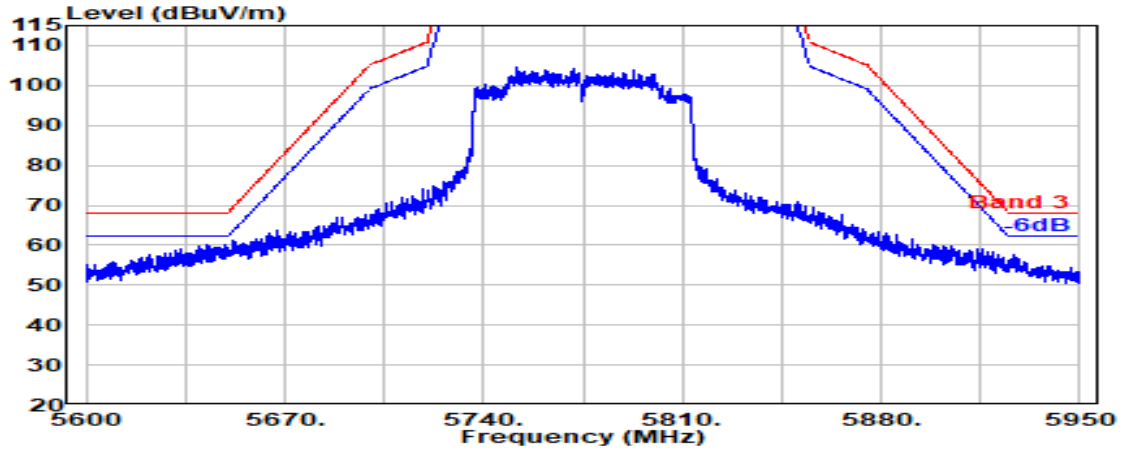

Antenna at Vertical Polarization

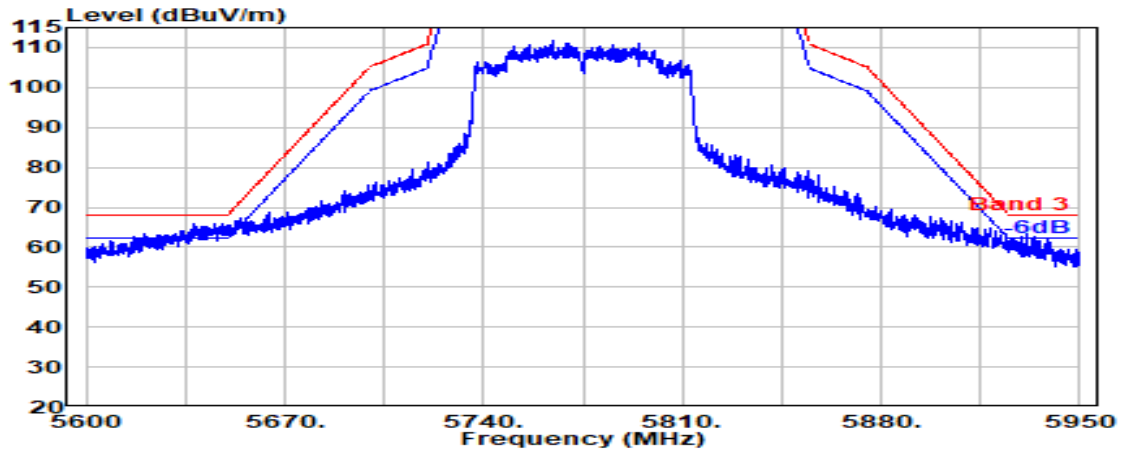


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

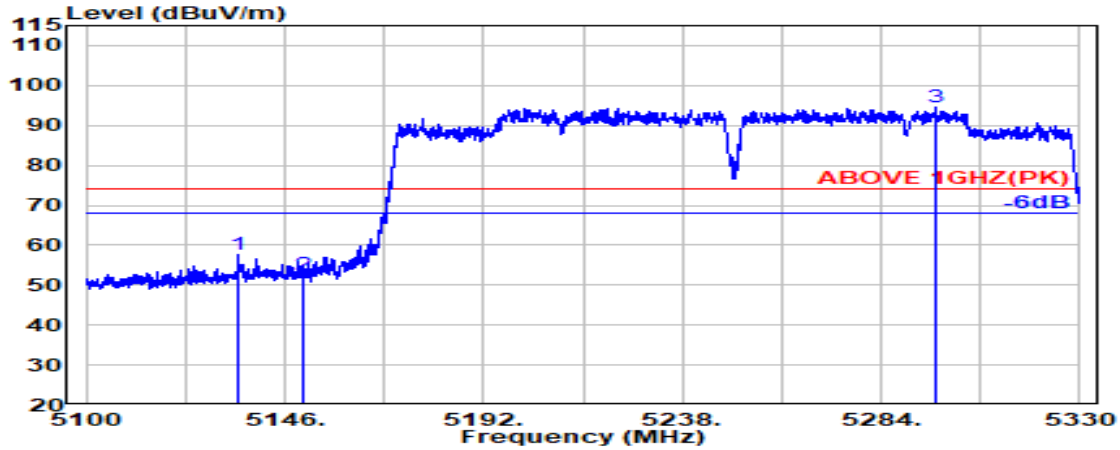

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.200	33.70	8.53	34.34	49.61	57.50	74.00	16.50	Peak
5150.000	33.70	8.54	34.34	44.88	52.79	74.00	21.21	Peak
@ 5296.400	34.08	8.63	34.28	85.98	94.41	---	---	Peak

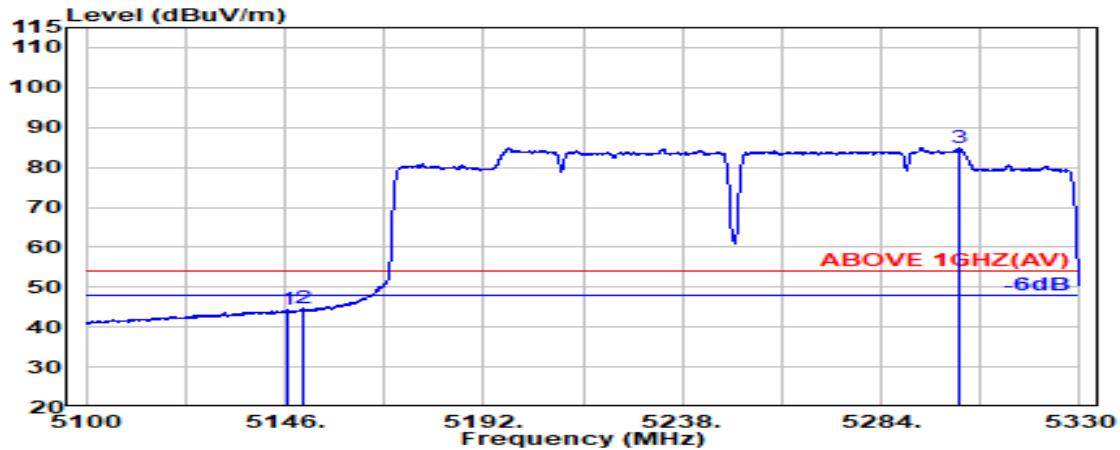


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.900	34.41	8.54	34.34	35.59	44.21	54.00	9.79	Average
5150.000	34.40	8.54	34.34	36.02	44.63	54.00	9.37	Average
@ 5302.200	34.50	8.64	34.28	76.06	84.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

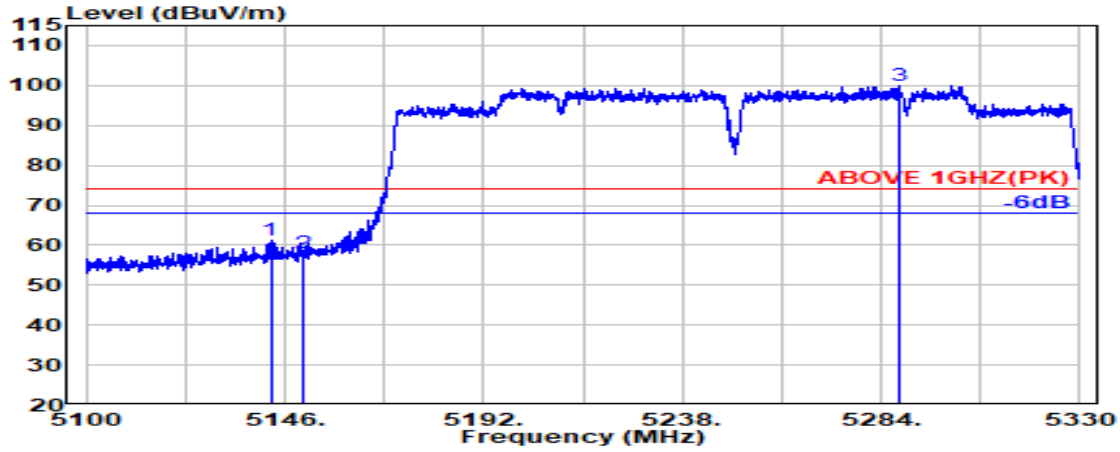

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.700	33.70	8.54	34.34	53.20	61.09	74.00	12.91	Peak
5150.000	33.70	8.54	34.34	49.96	57.87	74.00	16.13	Peak
@ 5288.000	34.03	8.63	34.28	91.67	100.05	---	---	Peak

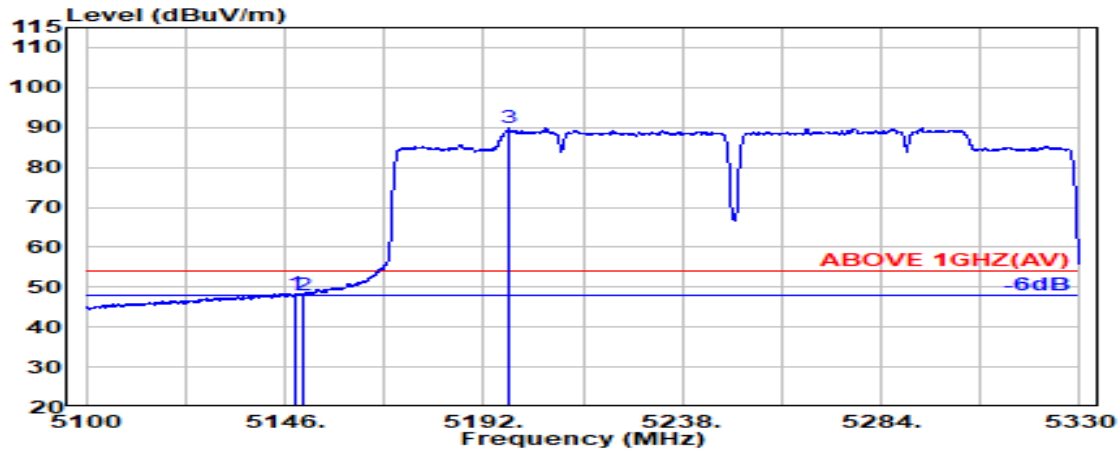


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.70	8.54	34.34	40.51	48.42	54.00	5.58	Average
5150.000	33.70	8.54	34.34	40.13	48.04	54.00	5.96	Average
@ 5198.000	33.70	8.57	34.32	81.86	89.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

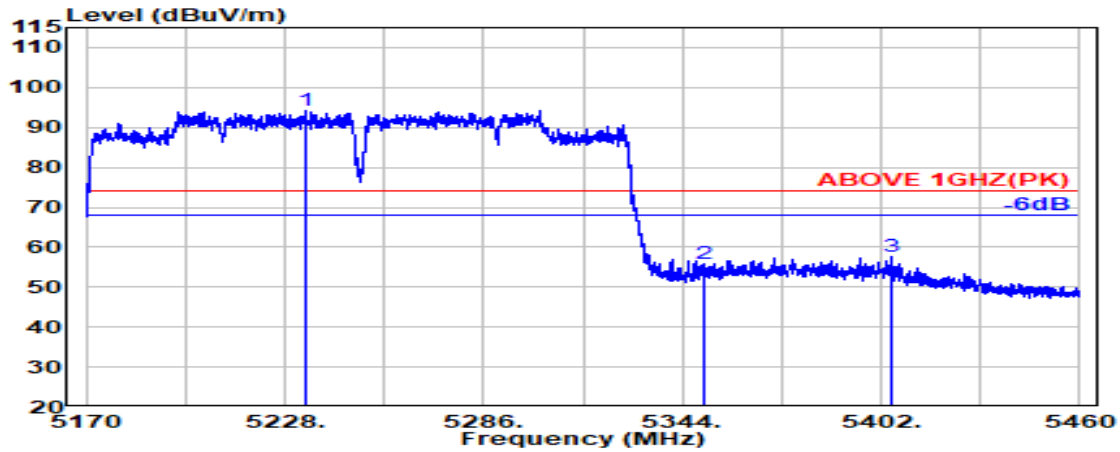

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5233.900	33.77	8.60	34.30	86.23	94.29	---	---	Peak
5350.000	33.90	8.67	34.26	47.42	55.72	74.00	18.28	Peak
5404.900	34.11	8.70	34.24	49.20	57.77	74.00	16.23	Peak

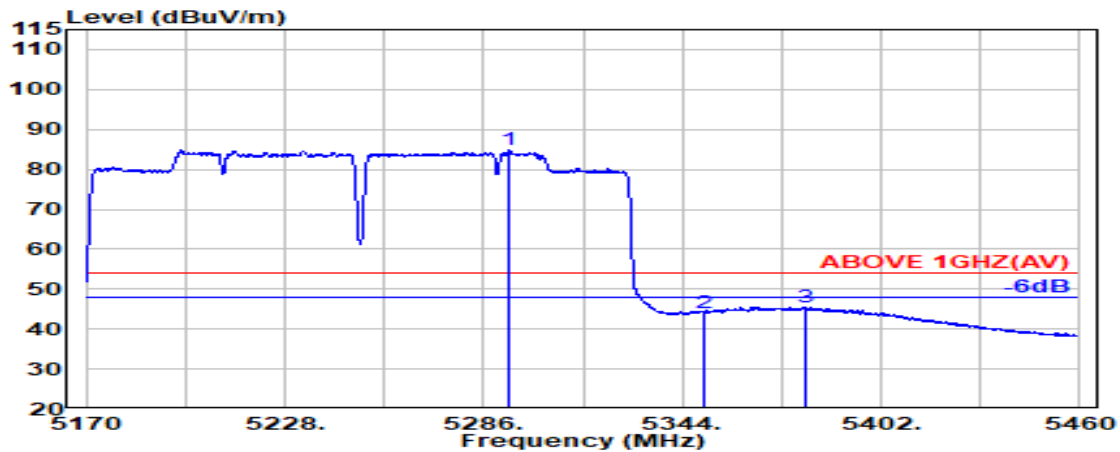

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.500	34.06	8.63	34.28	76.43	84.84	---	---	Average
5350.000	33.90	8.67	34.26	35.87	44.18	54.00	9.82	Average
5380.000	34.02	8.68	34.25	37.05	45.50	54.00	8.50	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5259.700	33.86	8.61	34.29	91.94	100.11	---	---	Peak
5350.000	33.90	8.67	34.26	53.75	62.06	74.00	11.94	Peak
5380.800	34.02	8.68	34.25	56.67	65.13	74.00	8.87	Peak

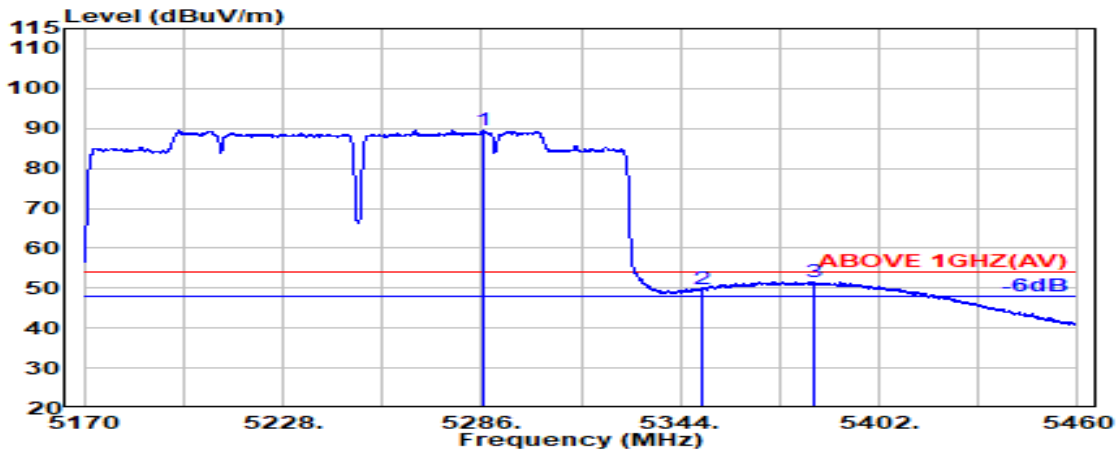


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.300	34.02	8.63	34.28	81.22	89.58	---	---	Average
5350.000	33.90	8.67	34.26	41.61	49.92	54.00	4.08	Average
5383.000	34.03	8.68	34.25	43.14	51.61	54.00	2.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

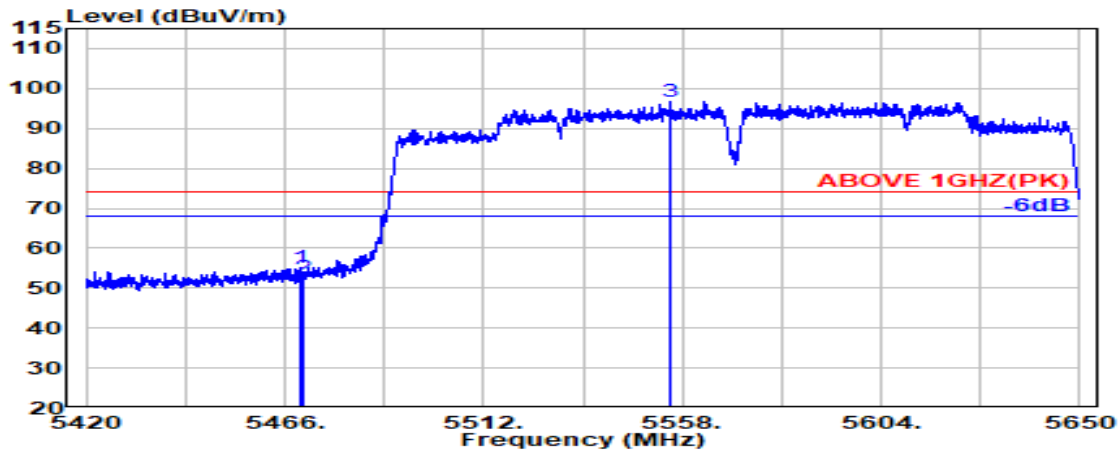

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.16	8.74	34.21	46.44	55.12	74.00	18.88	Peak
5470.000	34.16	8.74	34.21	43.93	52.62	74.00	21.38	Peak
@ 5555.100	34.09	8.78	34.23	87.96	96.61	---	---	Peak

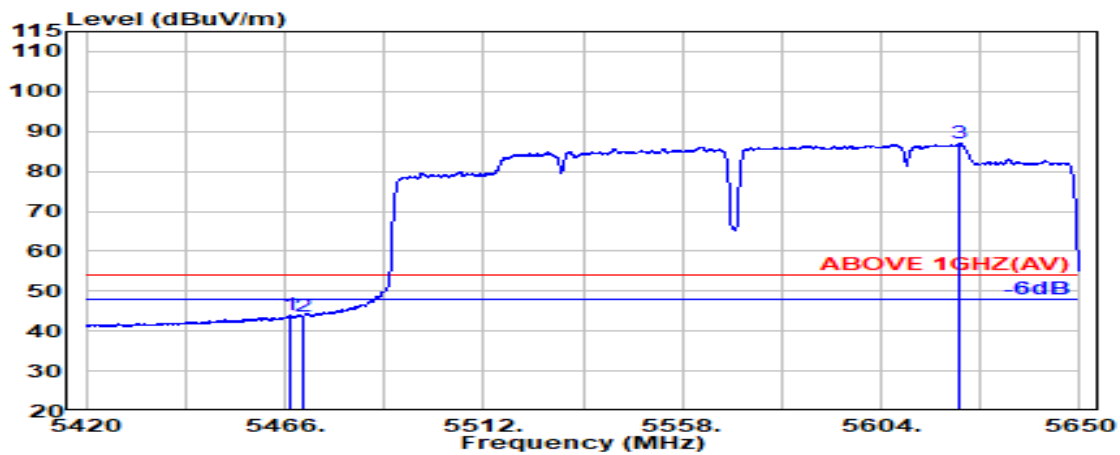


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.17	8.73	34.21	35.20	43.89	54.00	10.11	Average
5470.000	34.16	8.74	34.21	34.93	43.62	54.00	10.38	Average
@ 5622.100	34.00	8.82	34.26	78.54	87.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

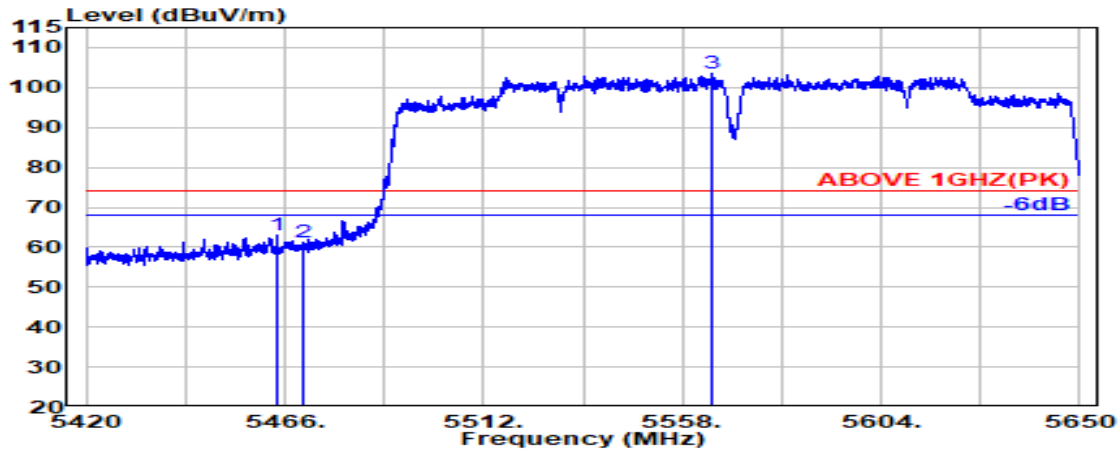

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.17	8.73	34.21	54.16	62.85	74.00	11.15	Peak
5470.000	34.16	8.74	34.21	52.55	61.24	74.00	12.76	Peak
@ 5565.100	34.07	8.79	34.23	95.01	103.64	---	---	Peak

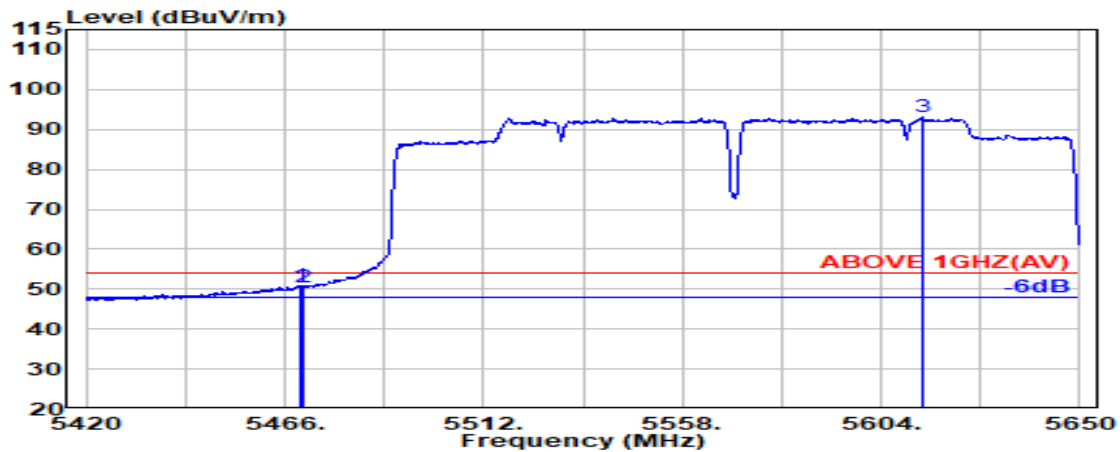


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.16	8.74	34.21	42.02	50.71	54.00	3.29	Average
5470.000	34.16	8.74	34.21	41.94	50.63	54.00	3.37	Average
@ 5613.500	34.00	8.82	34.25	84.57	93.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

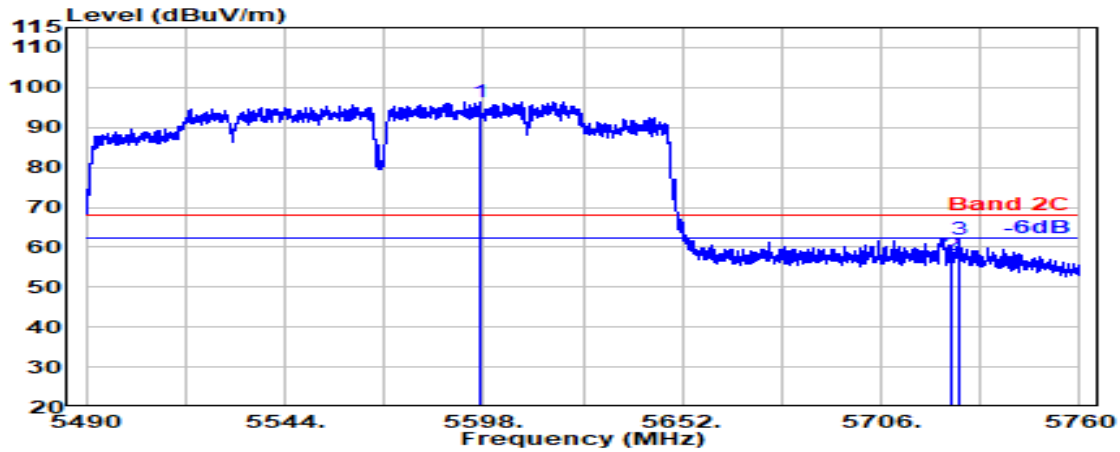

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5597.300	34.01	8.81	34.25	87.95	96.52	---	---	Peak
5725.000	33.80	8.88	34.31	49.69	58.06	68.20	10.14	Peak
5727.100	33.80	8.88	34.31	53.40	61.77	68.20	6.43	Peak

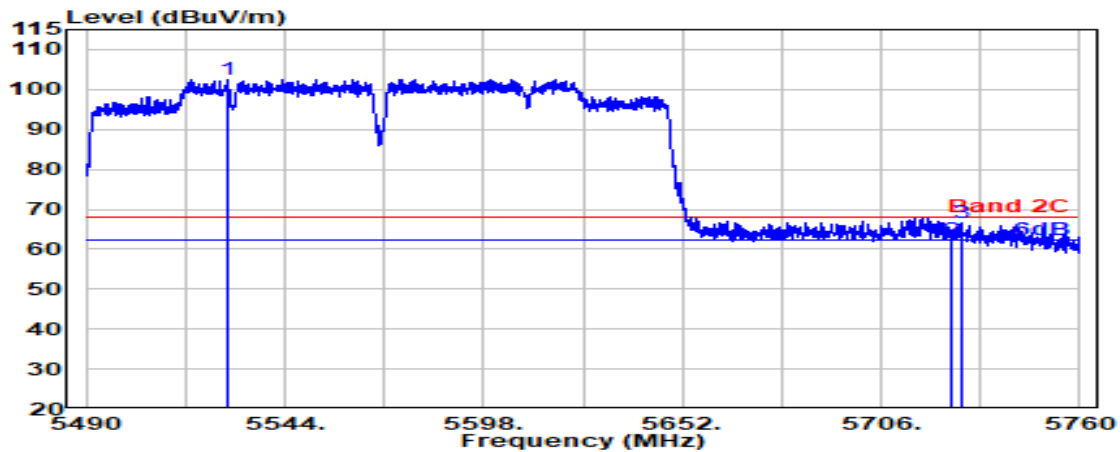


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5528.200	34.10	8.77	34.21	93.97	102.63	---	---	Peak
5725.000	33.80	8.88	34.31	54.05	62.42	68.20	5.78	Peak
5727.600	33.80	8.88	34.31	58.35	66.73	68.20	1.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

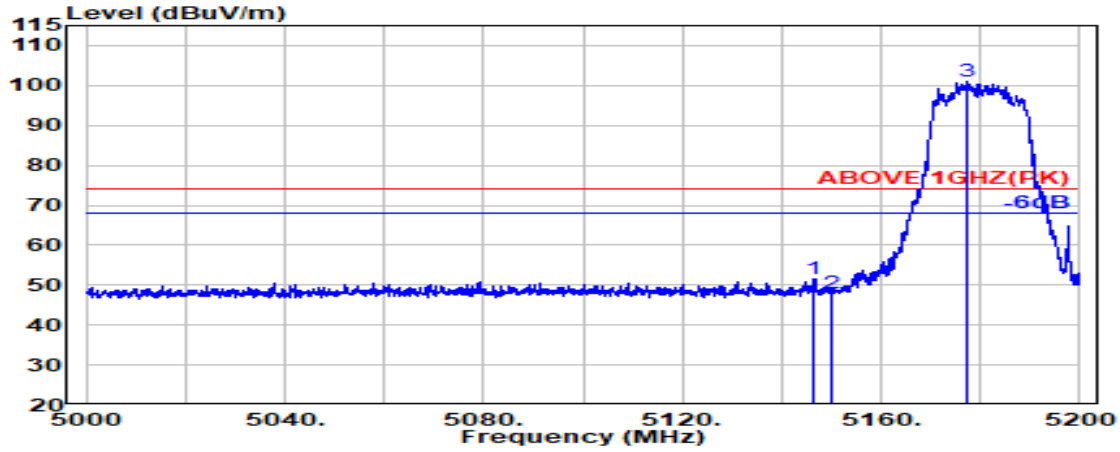

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.70	8.54	34.34	43.51	51.41	74.00	22.59	Peak
5150.000	33.70	8.54	34.34	40.09	48.00	74.00	26.00	Peak
@ 5177.400	33.70	8.56	34.33	92.97	100.90	---	---	Peak

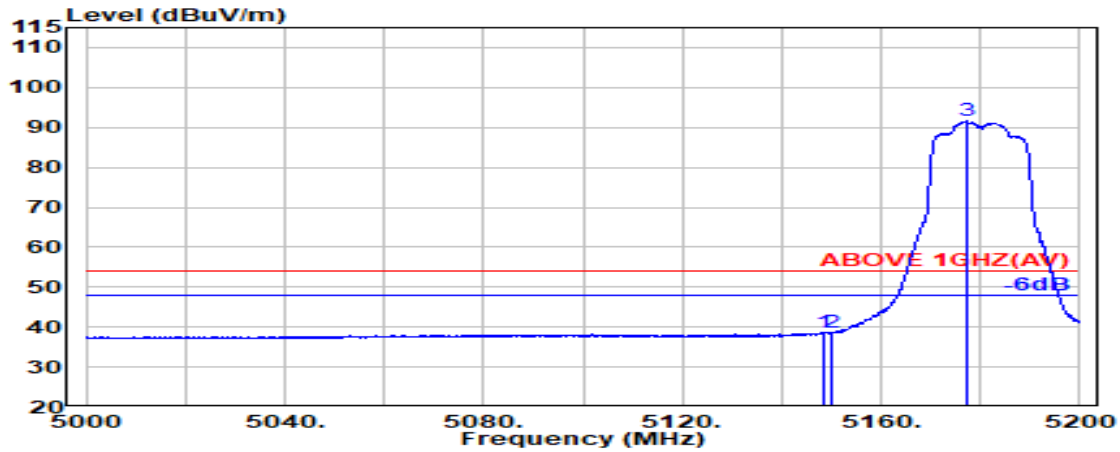


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.70	8.54	34.34	30.80	38.70	54.00	15.30	Average
5150.000	33.70	8.54	34.34	30.70	38.60	54.00	15.40	Average
@ 5177.100	33.70	8.56	34.33	83.77	91.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

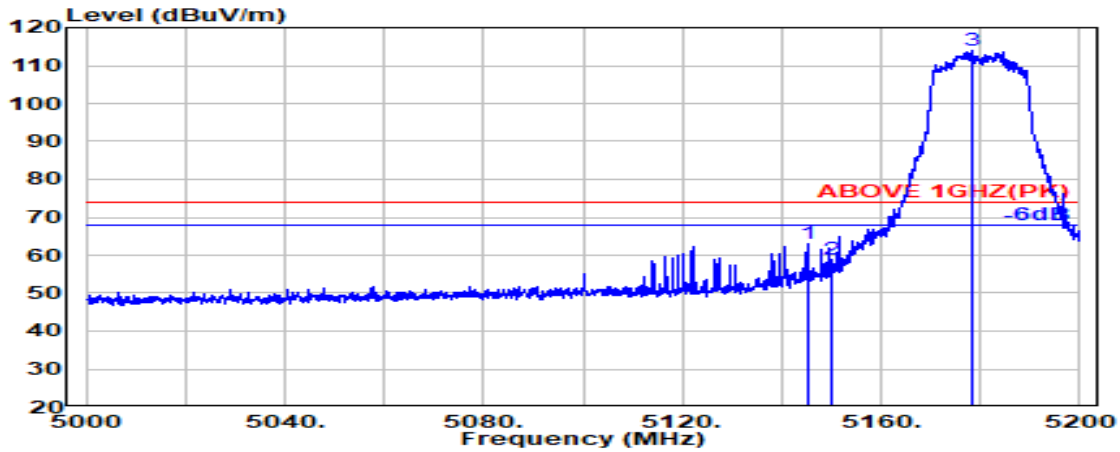

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.100	33.70	8.54	34.34	55.10	63.00	74.00	11.00	Peak
5150.000	33.70	8.54	34.34	50.90	58.81	74.00	15.19	Peak
@ 5178.500	33.70	8.56	34.33	105.94	113.88	---	---	Peak

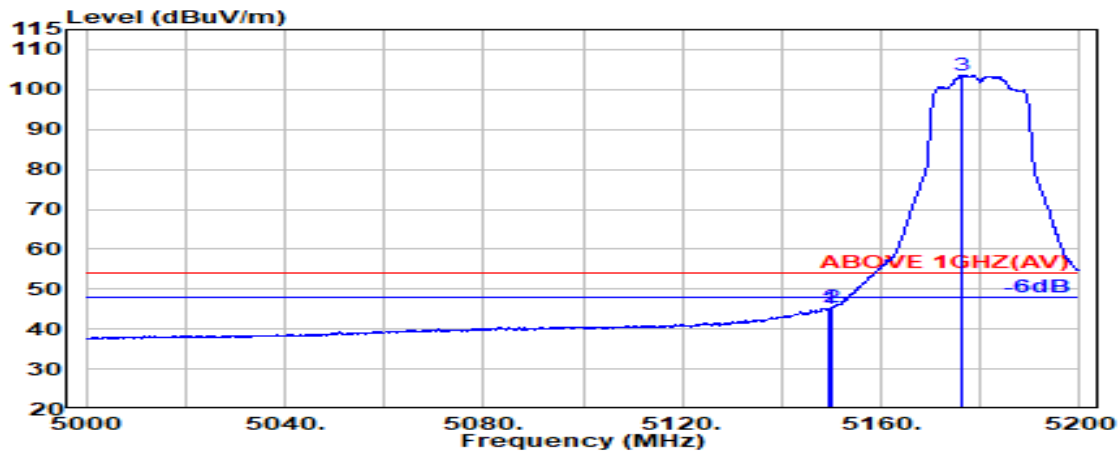


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.70	8.54	34.34	37.31	45.22	54.00	8.78	Average
5150.000	33.70	8.54	34.34	37.49	45.39	54.00	8.61	Average
@ 5176.000	33.70	8.56	34.33	95.64	103.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

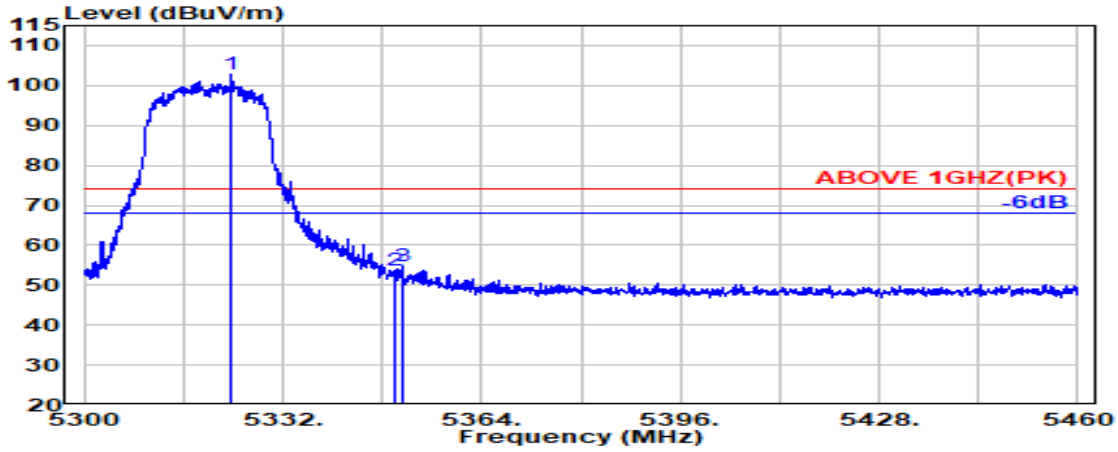

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.00	8.65	34.27	94.29	102.67	---	---	Peak
5350.000	33.90	8.67	34.26	45.56	53.86	74.00	20.14	Peak
5351.100	33.90	8.67	34.26	46.36	54.68	74.00	19.32	Peak

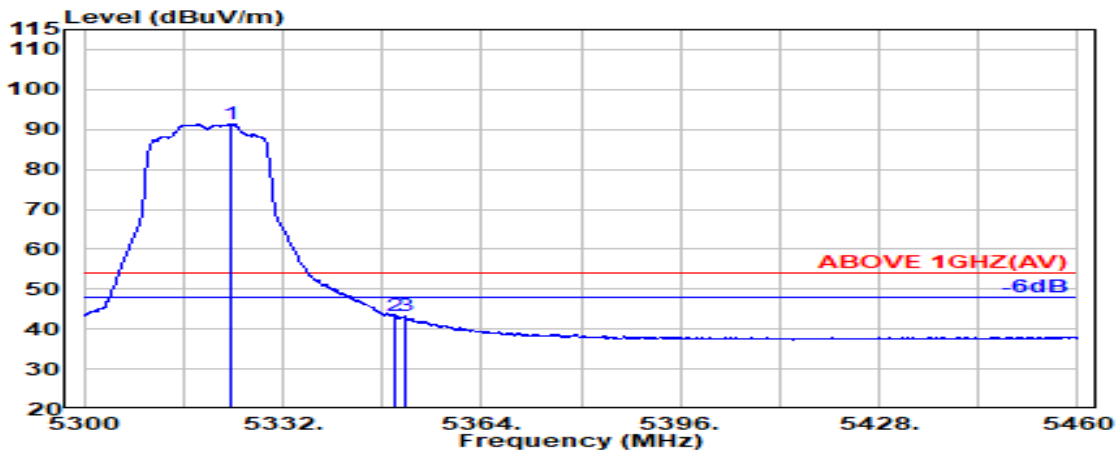


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.00	8.65	34.27	82.88	91.26	---	---	Average
5350.000	33.90	8.67	34.26	35.10	43.41	54.00	10.59	Average
5351.600	33.91	8.67	34.26	34.83	43.15	54.00	10.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

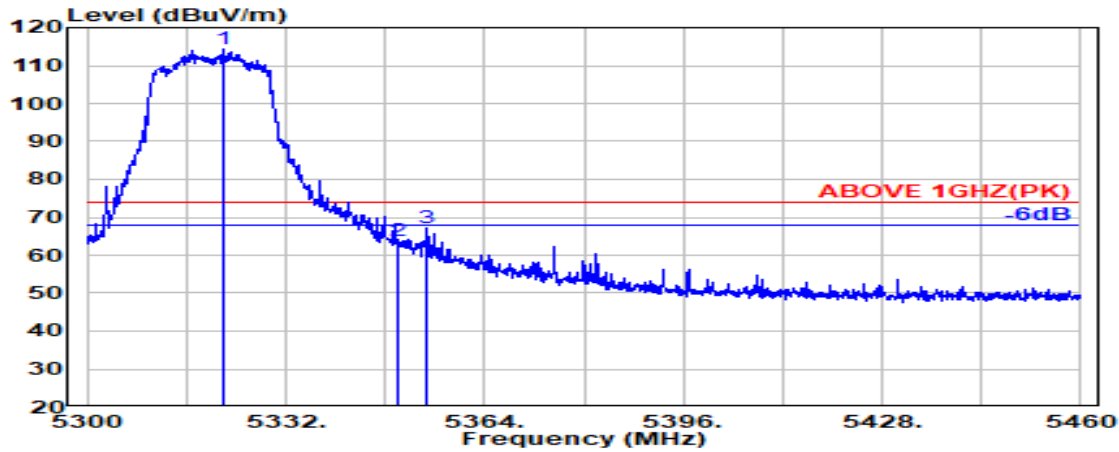

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.000	34.01	8.65	34.27	105.96	114.36	---	---	Peak
5350.000	33.90	8.67	34.26	55.42	63.73	74.00	10.27	Peak
5354.800	33.92	8.67	34.26	58.98	67.31	74.00	6.69	Peak

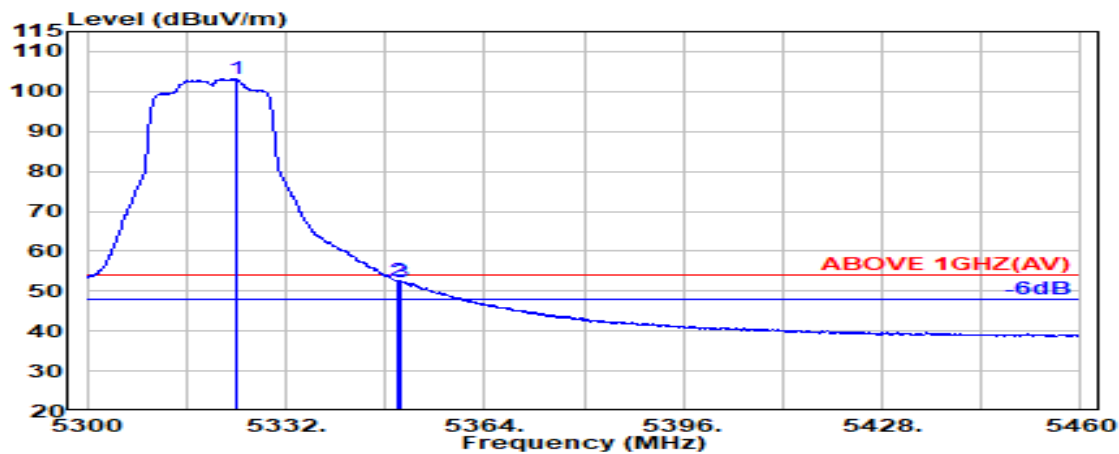


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	34.00	8.65	34.27	94.76	103.14	---	---	Average
5350.000	33.90	8.67	34.26	44.18	52.49	54.00	1.51	Average
5350.600	33.90	8.67	34.26	44.01	52.32	54.00	1.68	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

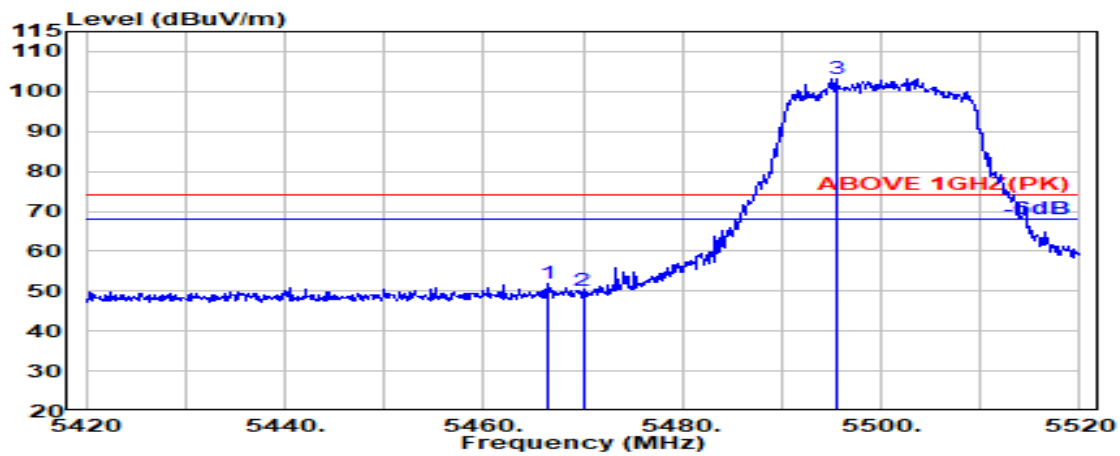

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.17	8.73	34.21	43.12	51.80	74.00	22.20	Peak
5470.000	34.16	8.74	34.21	41.43	50.11	74.00	23.89	Peak
@ 5495.500	34.11	8.75	34.20	94.64	103.30	---	---	Peak

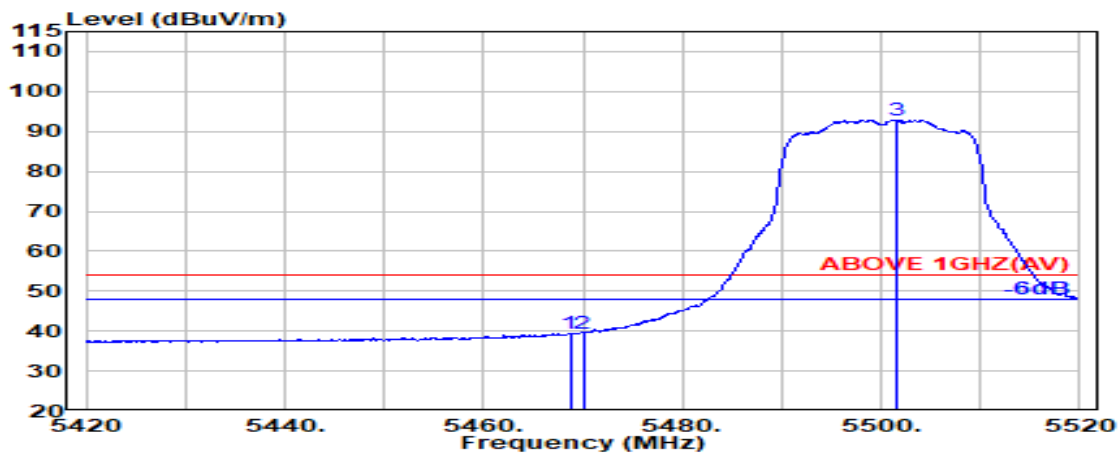


## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.21	30.76	39.45	54.00	14.55	Average
5470.000	34.16	8.74	34.21	30.81	39.49	54.00	14.51	Average
@ 5501.500	34.10	8.75	34.20	84.21	92.86	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.



Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

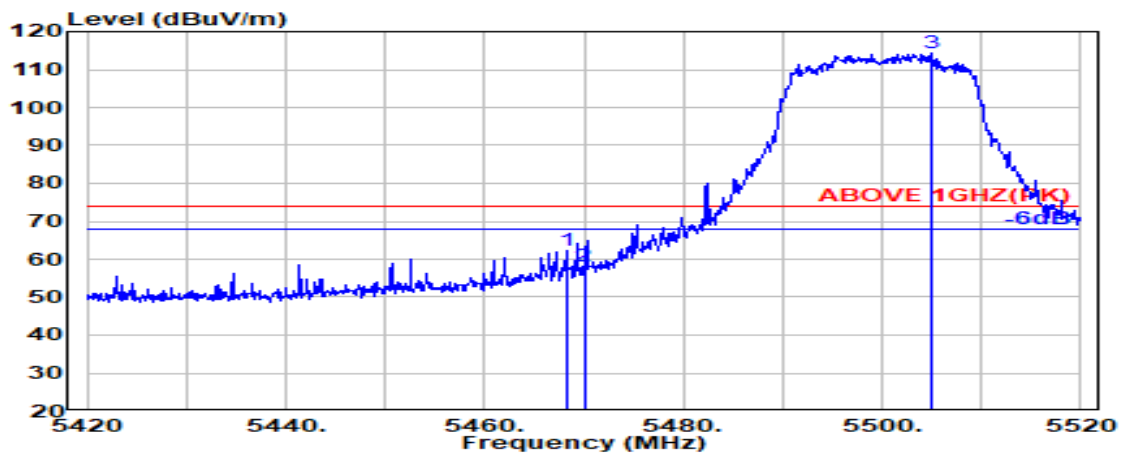
**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.21	53.66	62.35	74.00	11.65	Peak
5470.000	34.16	8.74	34.21	49.43	58.11	74.00	15.89	Peak
@ 5505.000	34.10	8.76	34.20	105.56	114.21	---	---	Peak

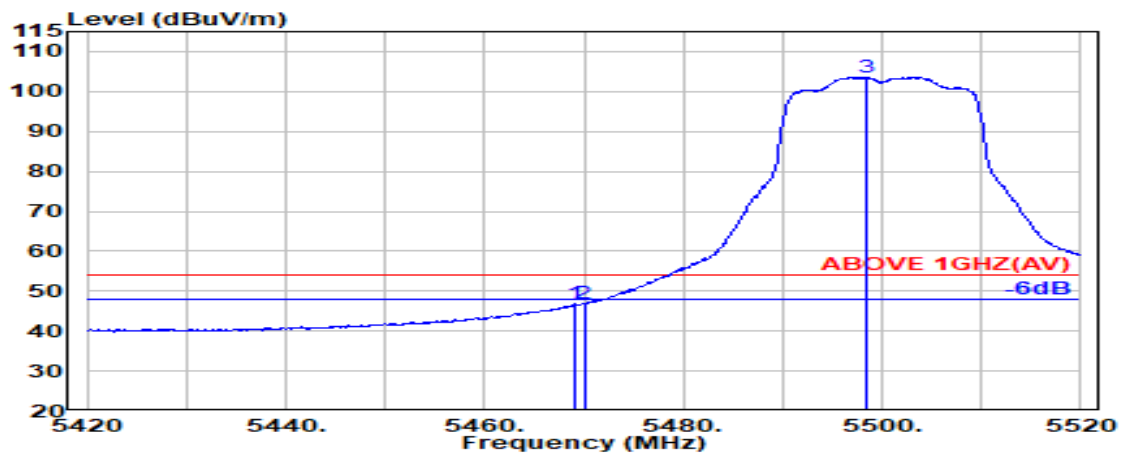
**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.21	38.05	46.74	54.00	7.26	Average
5470.000	34.16	8.74	34.21	38.21	46.89	54.00	7.11	Average
@ 5498.400	34.10	8.75	34.20	94.98	103.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

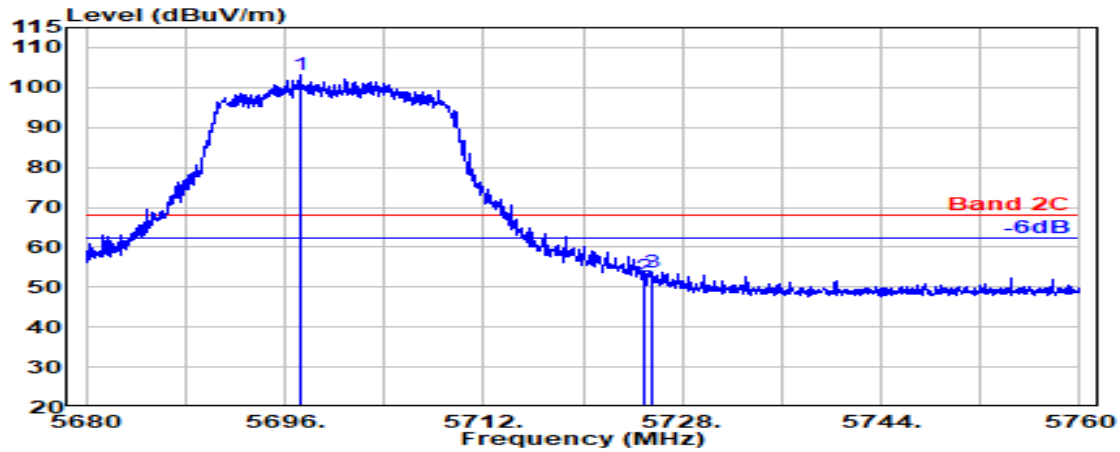

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.200	33.81	8.87	34.29	94.83	103.21	---	---	Peak
5725.000	33.80	8.88	34.31	44.28	52.65	68.20	15.55	Peak
5725.600	33.80	8.88	34.31	45.49	53.87	68.20	14.33	Peak

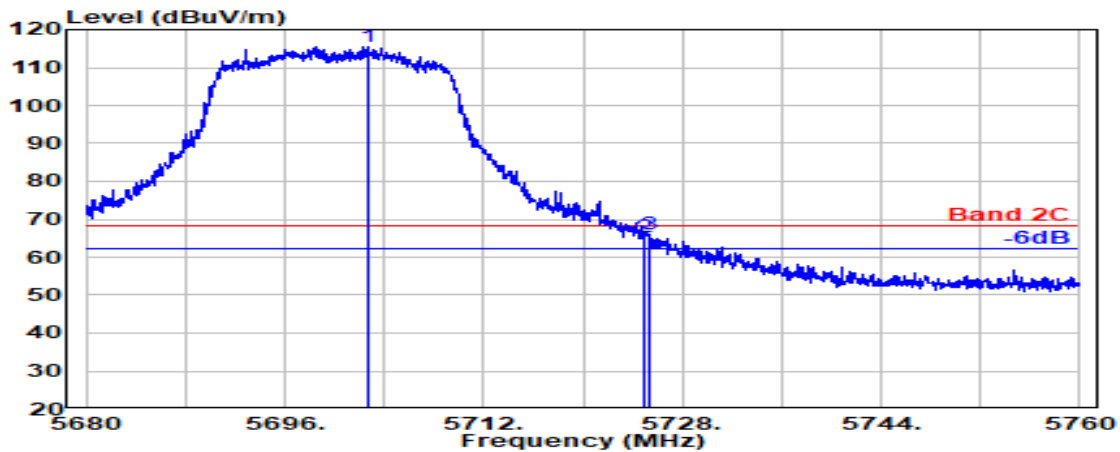


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.650	33.80	8.87	34.30	107.27	115.64	---	---	Peak
5725.000	33.80	8.88	34.31	56.86	65.24	68.20	2.96	Peak
5725.350	33.80	8.88	34.31	57.73	66.11	68.20	2.09	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

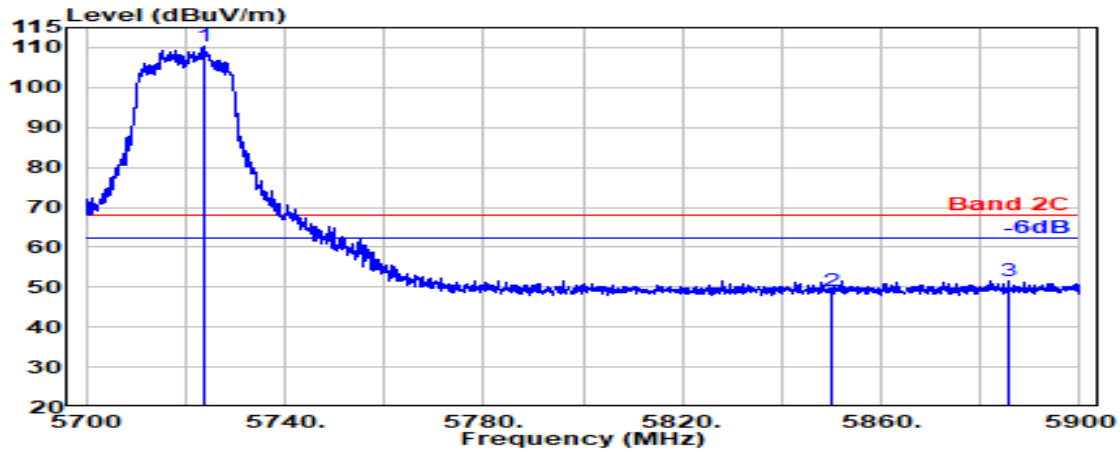

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.900	33.80	8.88	34.31	102.00	110.37	---	---	Peak
5850.000	34.10	8.95	34.36	40.47	49.15	68.20	19.05	Peak
5885.600	34.10	8.97	34.38	43.03	51.72	68.20	16.48	Peak

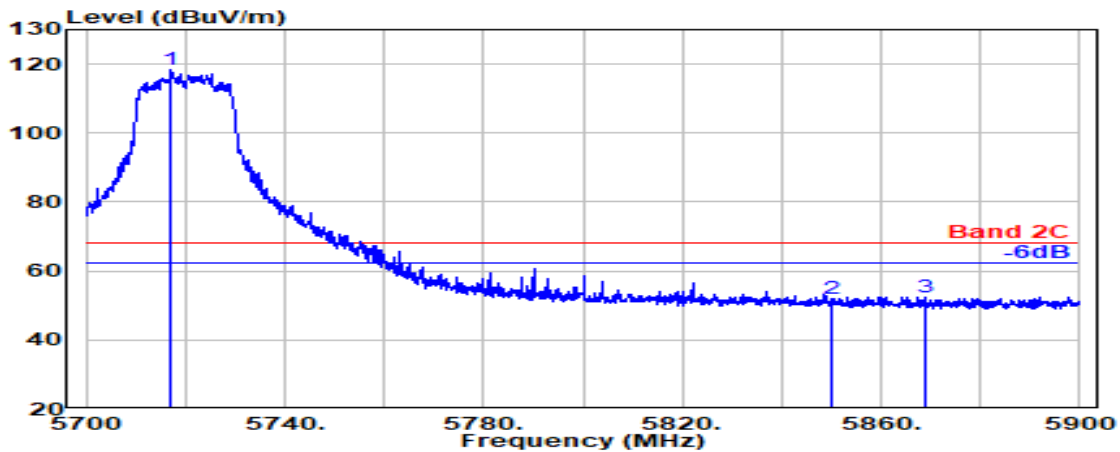


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.200	33.80	8.88	34.30	109.95	118.32	---	---	Peak
5850.000	34.10	8.95	34.36	43.26	51.95	68.20	16.25	Peak
5868.900	34.10	8.96	34.37	43.88	52.57	68.20	15.63	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

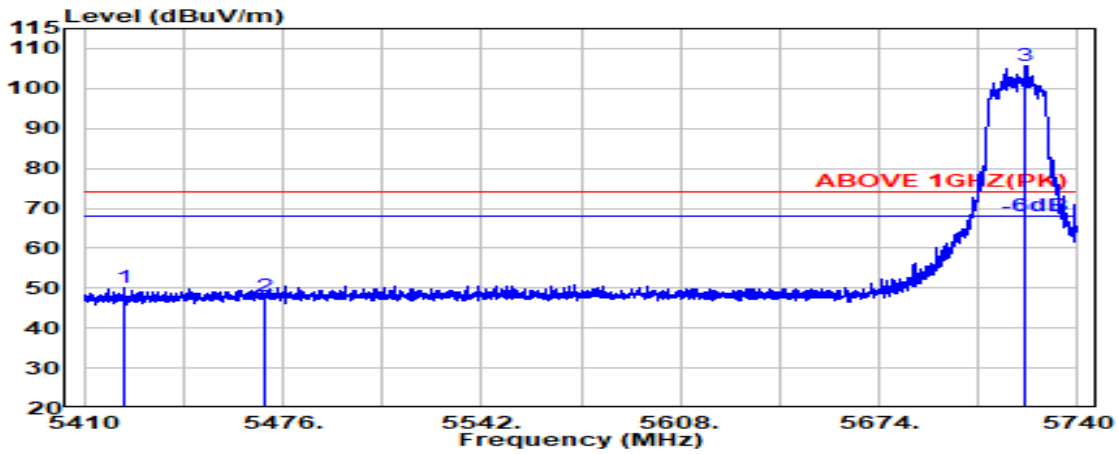

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.600	34.15	8.71	34.23	41.43	50.05	74.00	23.95	Peak
5470.000	34.16	8.74	34.21	39.43	48.11	74.00	25.89	Peak
@ 5722.800	33.80	8.88	34.30	97.32	105.70	---	---	Peak

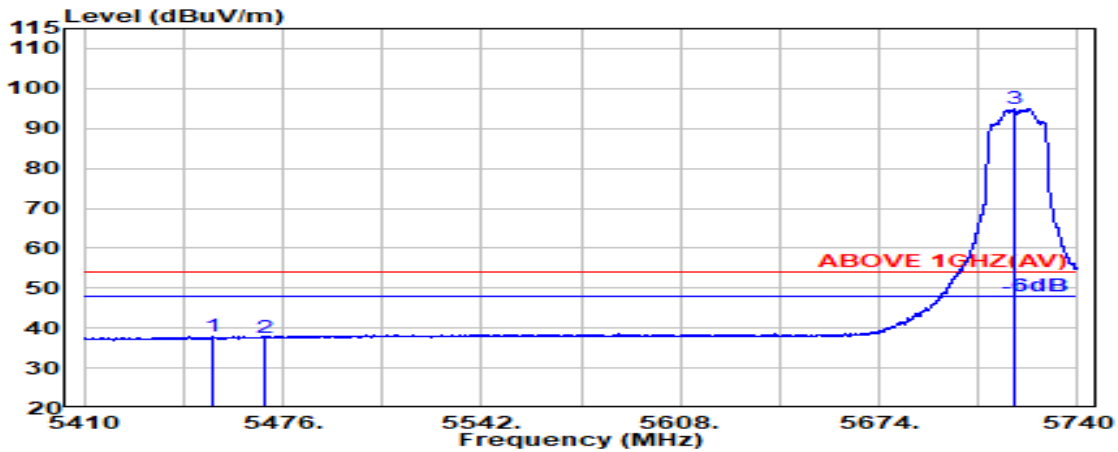


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.800	34.19	8.73	34.22	29.09	37.79	54.00	16.21	Average
5470.000	34.16	8.74	34.21	28.93	37.62	54.00	16.38	Average
@ 5718.800	33.80	8.88	34.30	86.59	94.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

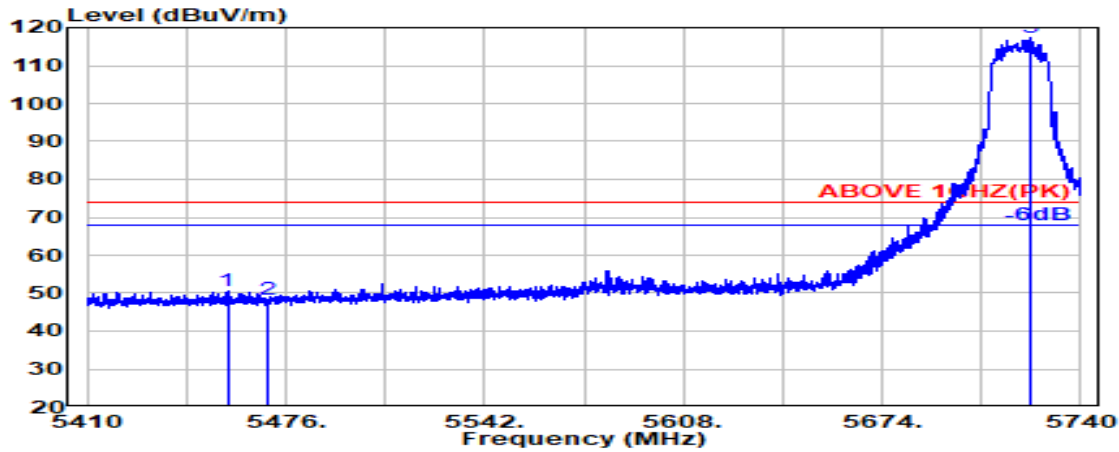

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.600	34.19	8.73	34.22	41.69	50.39	74.00	23.61	Peak
5470.000	34.16	8.74	34.21	39.49	48.17	74.00	25.83	Peak
@ 5723.100	33.80	8.88	34.31	108.98	117.36	---	---	Peak

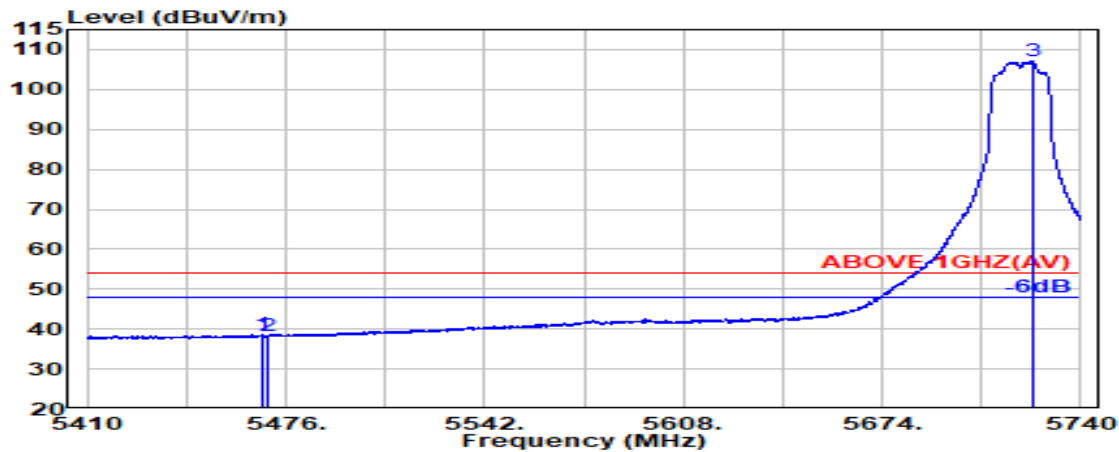


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.16	8.73	34.21	29.92	38.60	54.00	15.40	Average
5470.000	34.16	8.74	34.21	29.65	38.33	54.00	15.67	Average
@ 5724.000	33.80	8.88	34.31	98.71	107.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

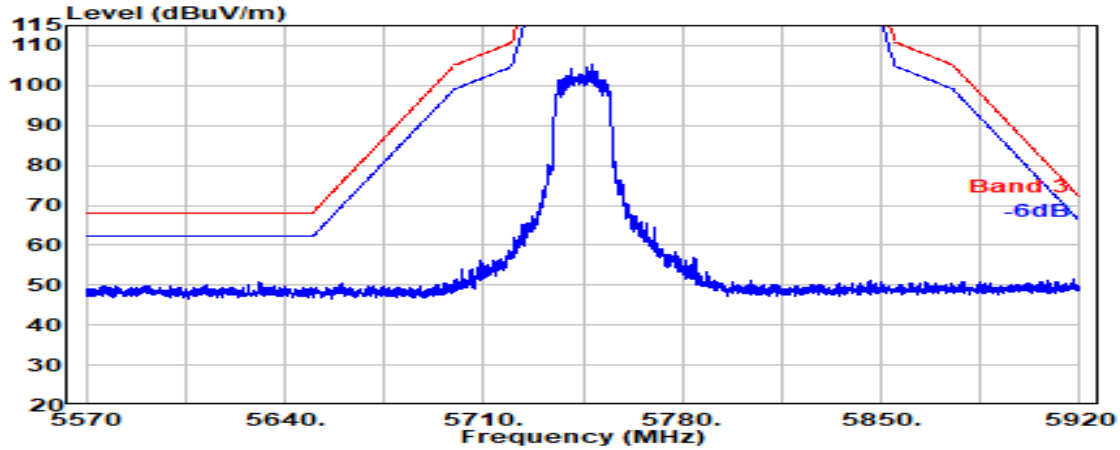


Antenna at Vertical Polarization

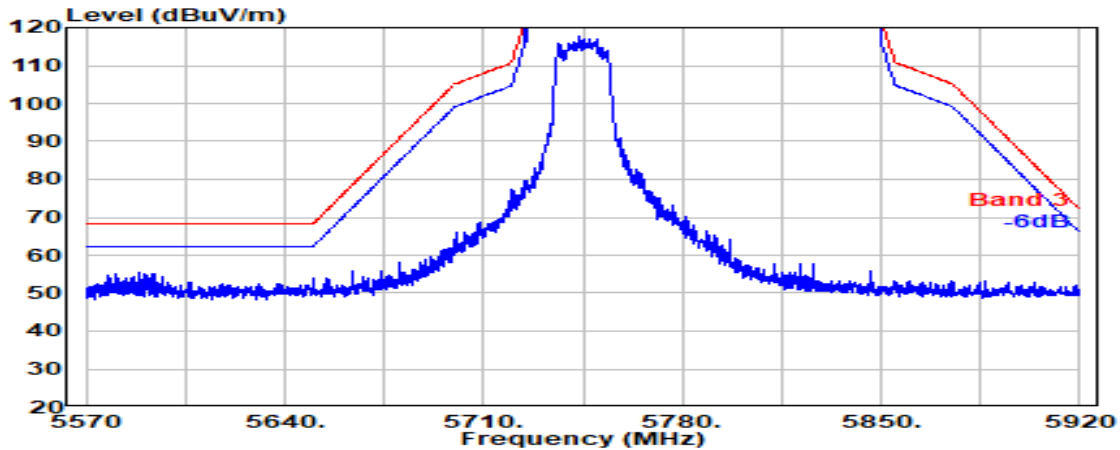


Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

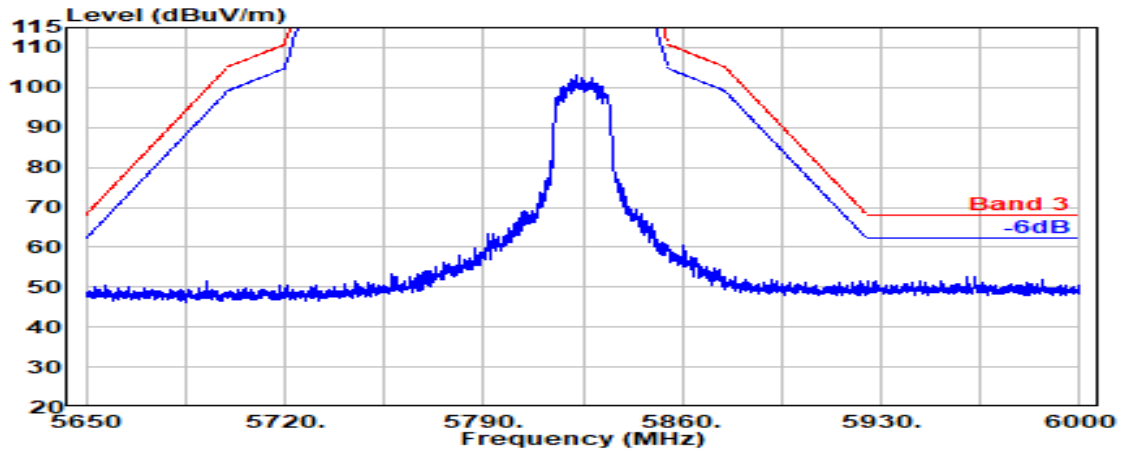

Antenna at Vertical Polarization

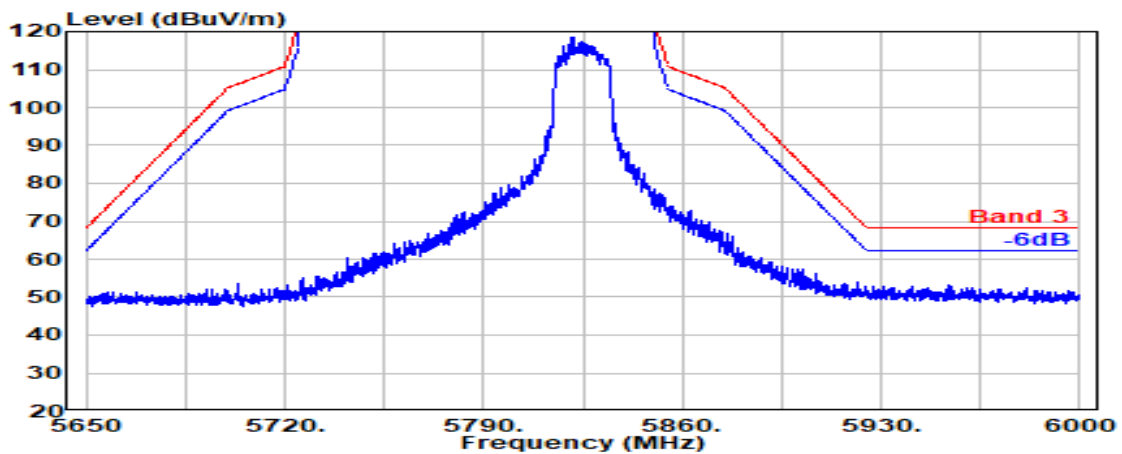


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

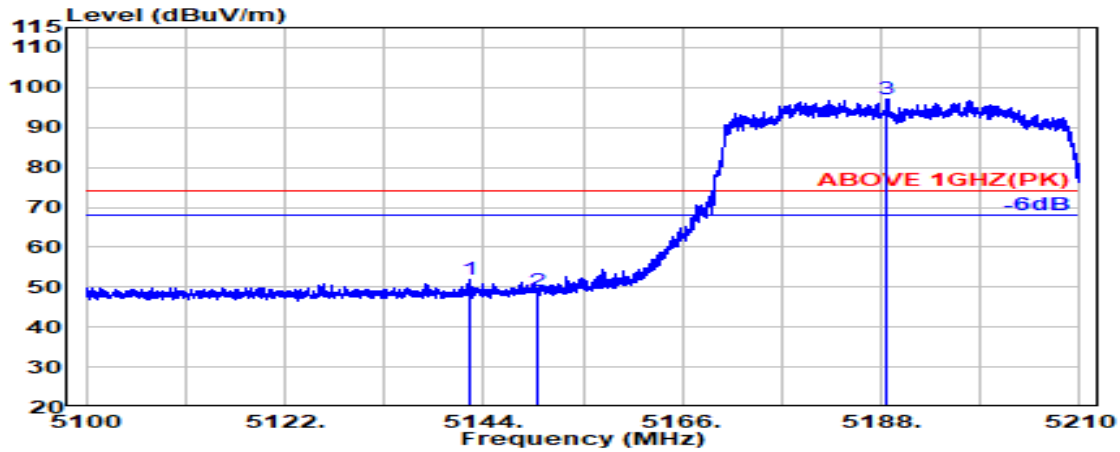

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.366	33.70	8.54	34.34	44.07	51.96	74.00	22.04	Peak
5150.000	33.70	8.54	34.34	41.24	49.15	74.00	24.85	Peak
@ 5188.691	33.70	8.57	34.32	89.25	97.19	---	---	Peak

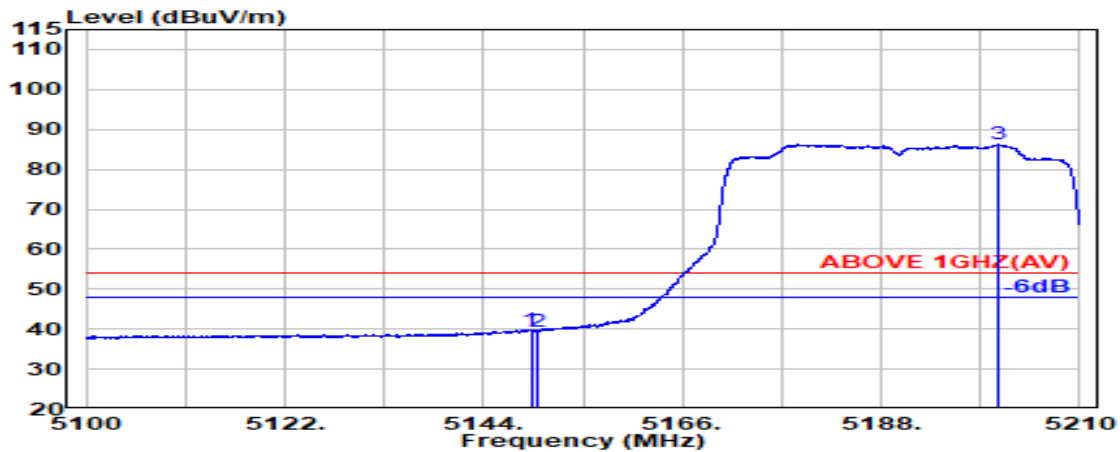


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.249	33.70	8.54	34.34	31.88	39.79	54.00	14.21	Average
5150.000	33.70	8.54	34.34	31.61	39.52	54.00	14.48	Average
@ 5200.886	33.70	8.58	34.32	78.28	86.24	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

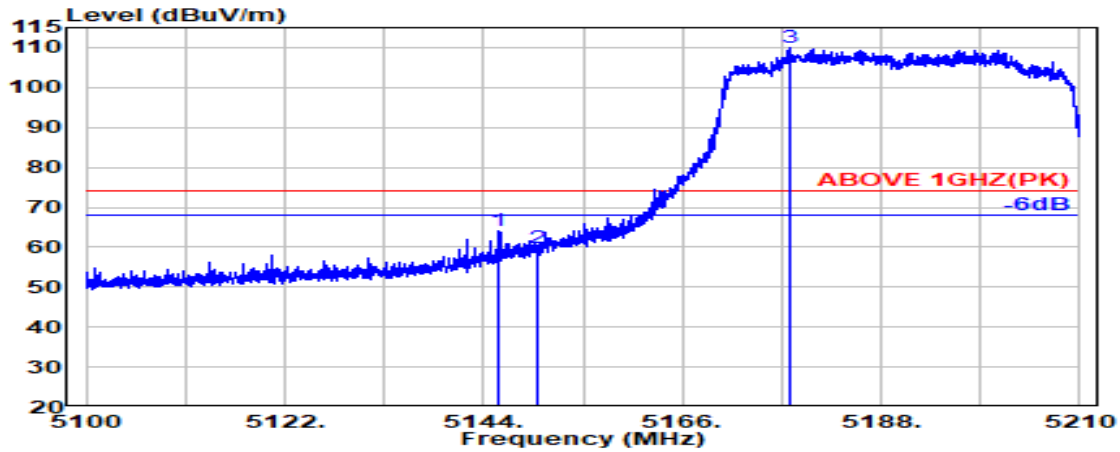

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.729	33.70	8.54	34.34	56.31	64.22	74.00	9.78	Peak
5150.000	33.70	8.54	34.34	52.04	59.95	74.00	14.05	Peak
@ 5177.786	33.70	8.56	34.33	101.96	109.90	---	---	Peak

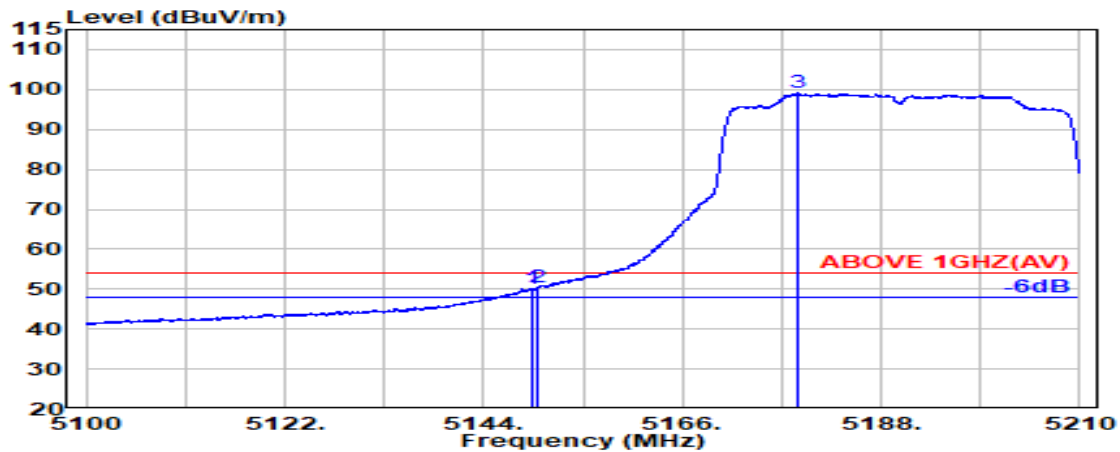


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.437	33.70	8.54	34.34	42.29	50.20	54.00	3.80	Average
5150.000	33.70	8.54	34.34	42.50	50.40	54.00	3.60	Average
@ 5178.823	33.70	8.56	34.33	91.18	99.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

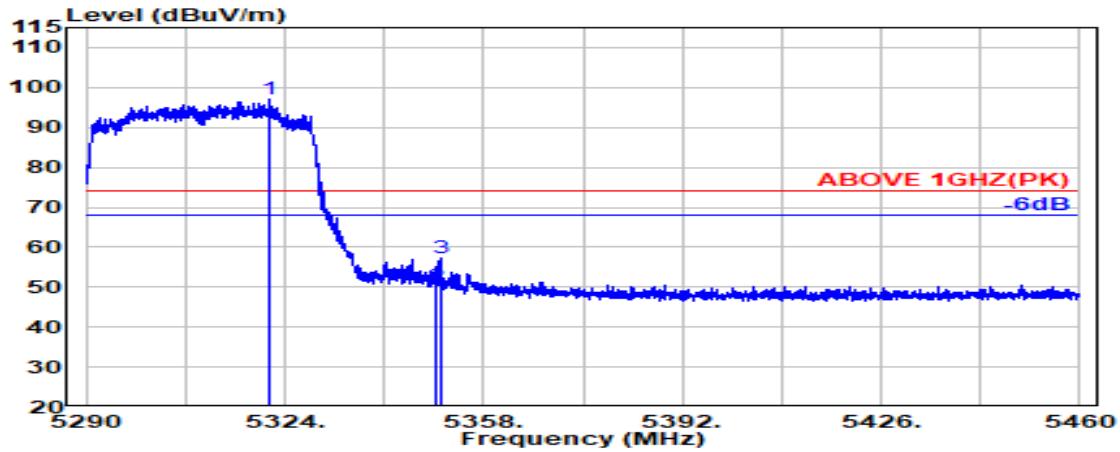

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.474	34.01	8.65	34.27	88.54	96.93	---	---	Peak
5350.000	33.90	8.67	34.26	41.88	50.19	74.00	23.81	Peak
5350.763	33.90	8.67	34.26	48.89	57.20	74.00	16.80	Peak

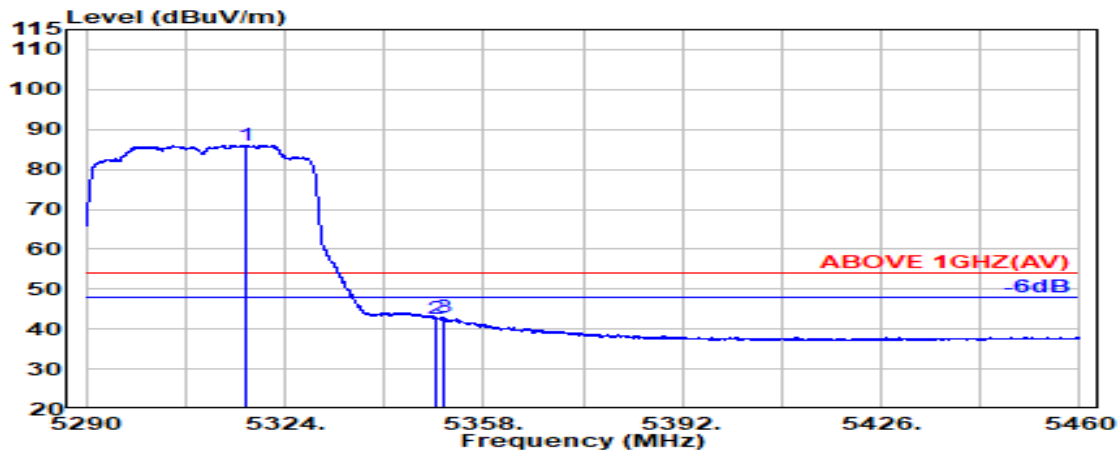


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.151	34.03	8.65	34.27	77.58	85.99	---	---	Average
5350.000	33.90	8.67	34.26	34.34	42.64	54.00	11.36	Average
5351.151	33.90	8.67	34.26	34.60	42.91	54.00	11.09	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

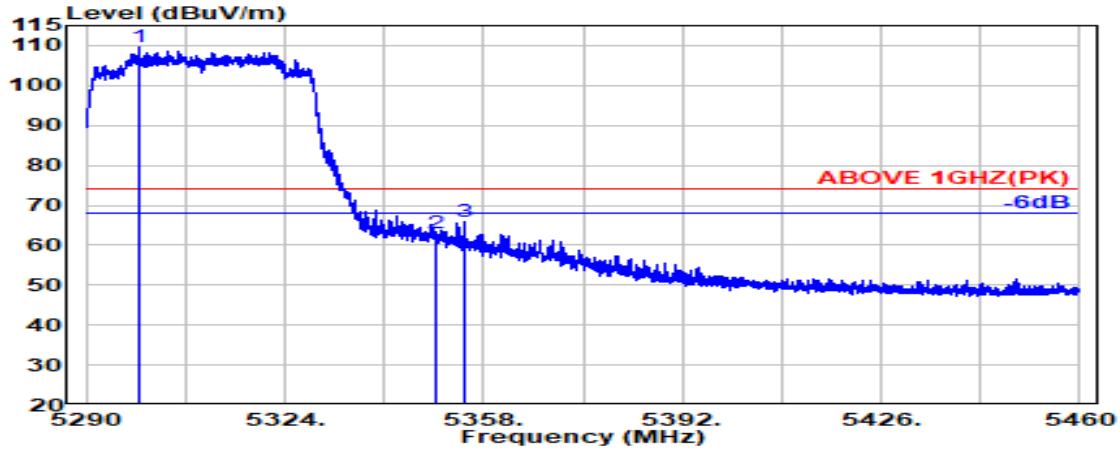

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.131	34.09	8.63	34.28	101.08	109.53	---	---	Peak
5350.000	33.90	8.67	34.26	54.65	62.95	74.00	11.05	Peak
5354.843	33.92	8.67	34.26	57.41	65.74	74.00	8.26	Peak

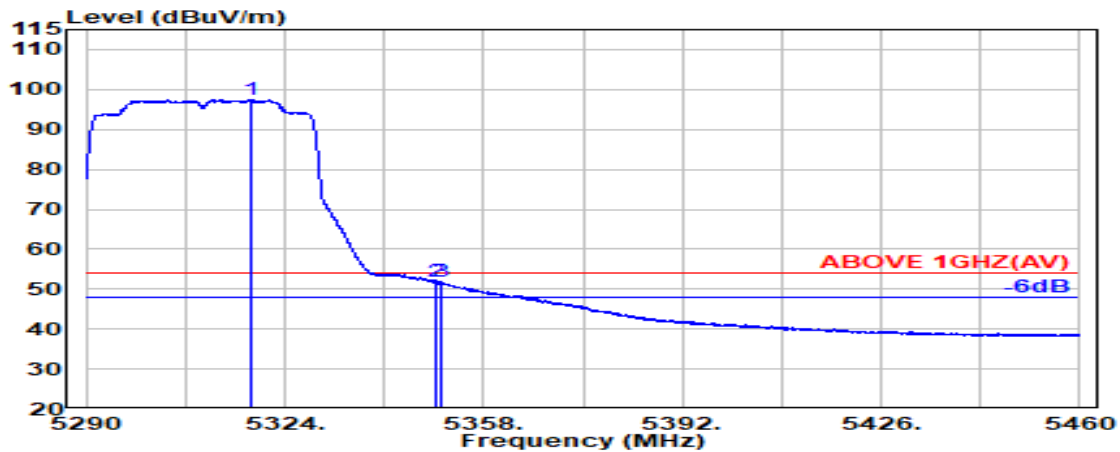


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.074	34.03	8.65	34.27	89.03	97.43	---	---	Average
5350.000	33.90	8.67	34.26	43.55	51.85	54.00	2.15	Average
5350.812	33.90	8.67	34.26	43.44	51.75	54.00	2.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

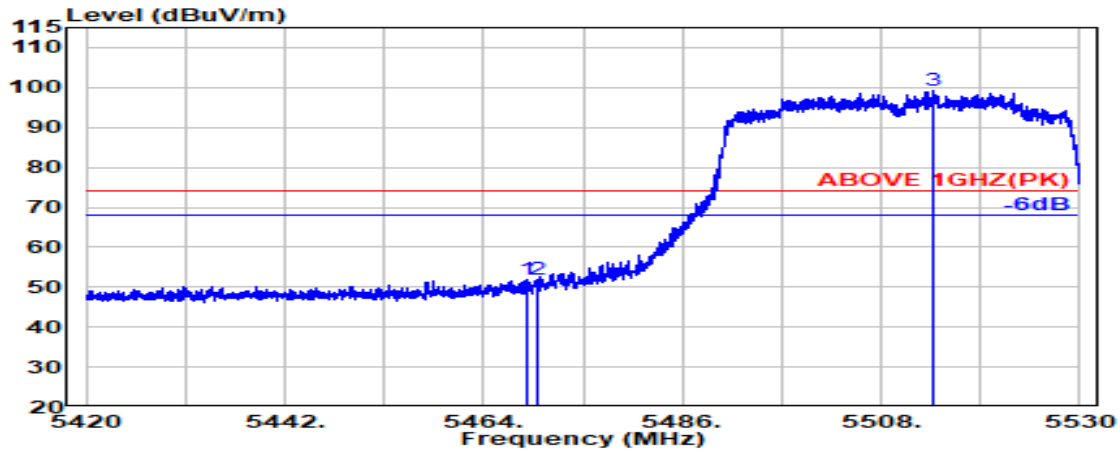

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.809	34.16	8.74	34.21	43.35	52.03	74.00	21.97	Peak
5470.000	34.16	8.74	34.21	43.05	51.73	74.00	22.27	Peak
@ 5513.783	34.10	8.76	34.21	90.65	99.31	---	---	Peak

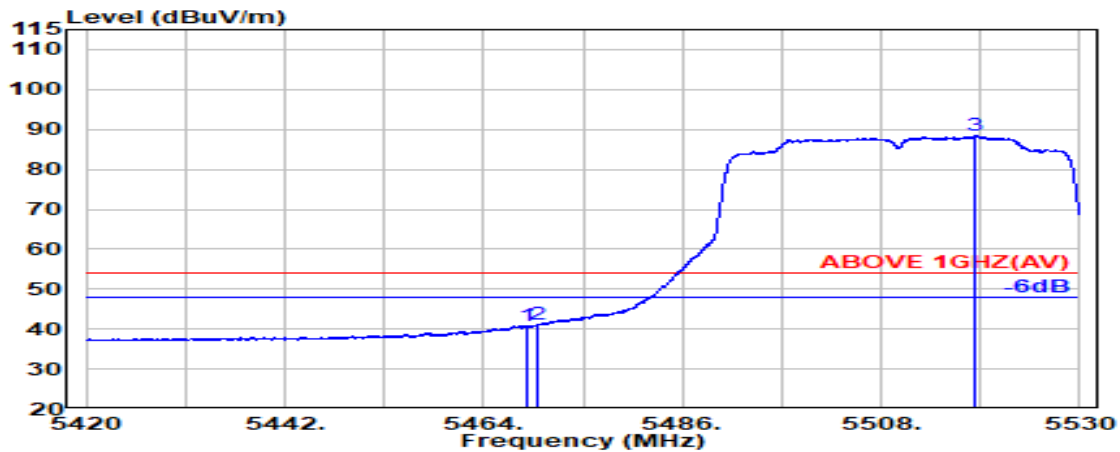


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.16	8.74	34.21	32.19	40.87	54.00	13.13	Average
5470.000	34.16	8.74	34.21	32.35	41.03	54.00	12.97	Average
@ 5518.434	34.10	8.76	34.21	79.74	88.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

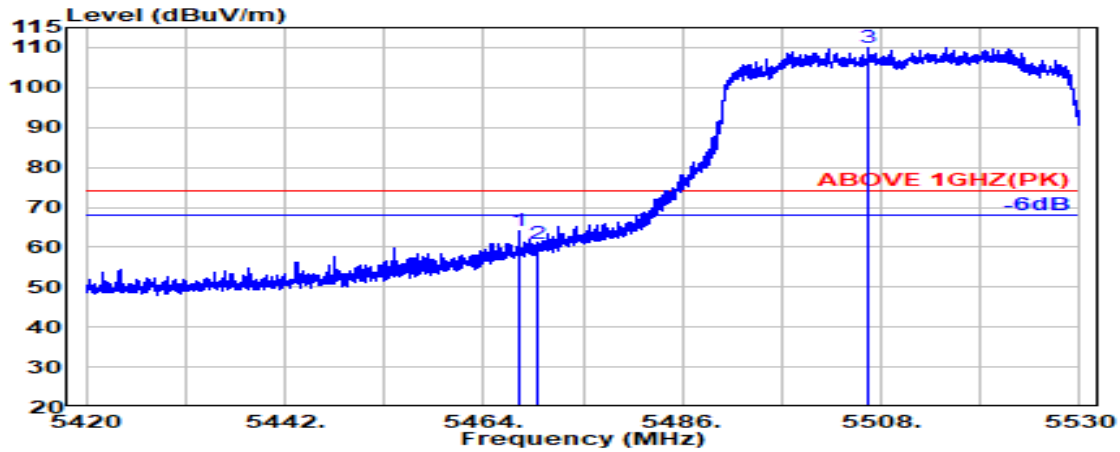

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.929	34.16	8.73	34.21	55.38	64.07	74.00	9.93	Peak
5470.000	34.16	8.74	34.21	52.07	60.76	74.00	13.24	Peak
@ 5506.586	34.10	8.76	34.20	101.41	110.07	---	---	Peak

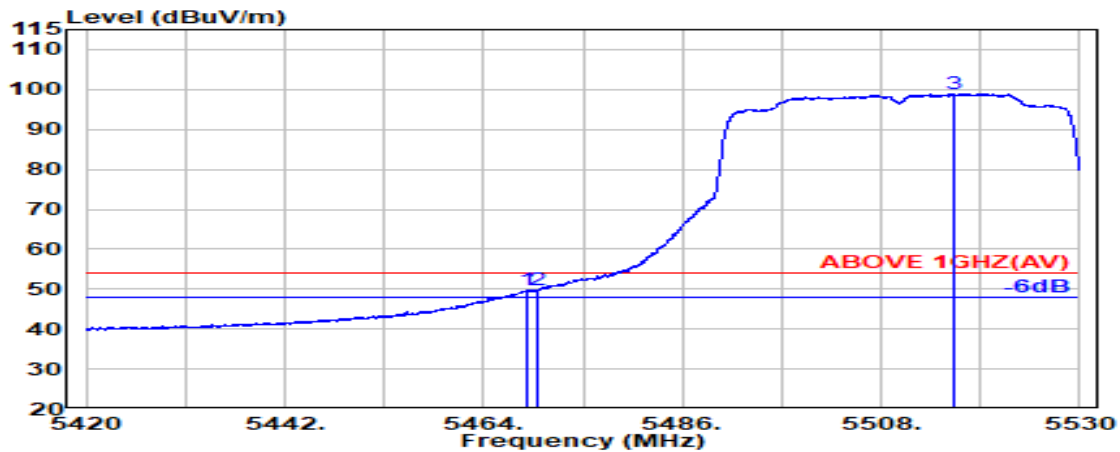


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.934	34.16	8.74	34.21	41.09	49.78	54.00	4.22	Average
5470.000	34.16	8.74	34.21	41.11	49.79	54.00	4.21	Average
@ 5516.171	34.10	8.76	34.21	90.24	98.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

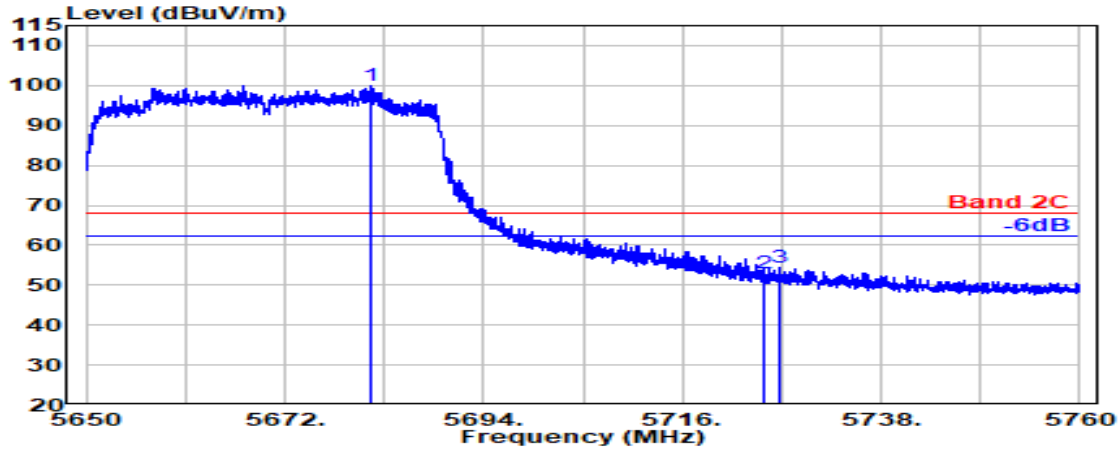

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.586	33.87	8.86	34.29	91.57	100.02	---	---	Peak
5725.000	33.80	8.88	34.31	44.49	52.87	68.20	15.33	Peak
5726.654	33.80	8.88	34.31	46.20	54.57	68.20	13.63	Peak

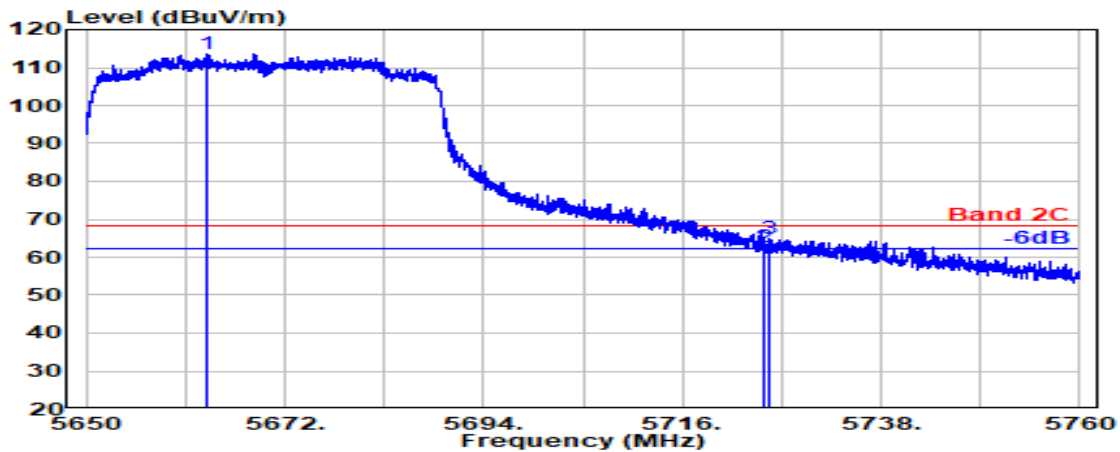


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5663.263	33.95	8.85	34.28	105.08	113.60	---	---	Peak
5725.000	33.80	8.88	34.31	54.42	62.79	68.20	5.41	Peak
5725.711	33.80	8.88	34.31	56.60	64.98	68.20	3.22	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

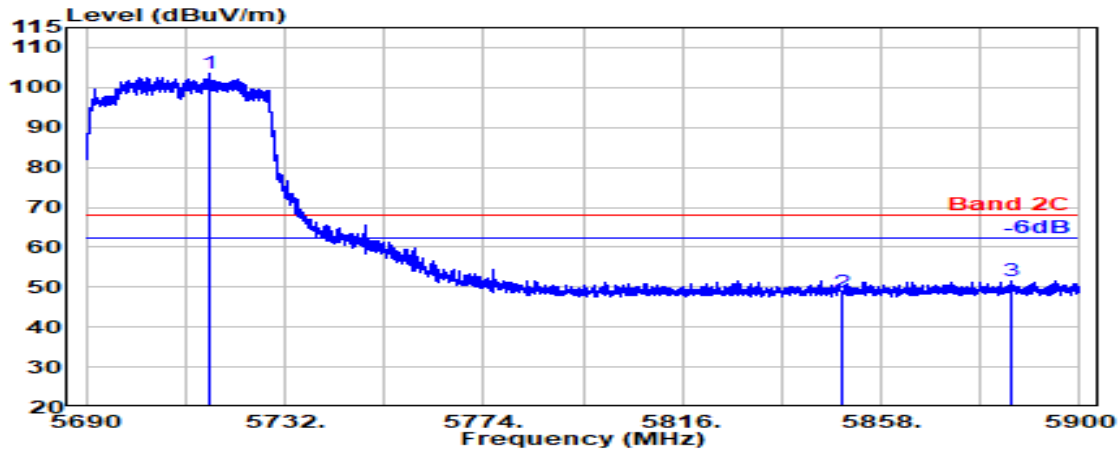

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.860	33.80	8.88	34.30	94.98	103.36	---	---	Peak
5850.000	34.10	8.95	34.36	40.17	48.85	68.20	19.35	Peak
5885.480	34.10	8.97	34.38	42.98	51.67	68.20	16.53	Peak

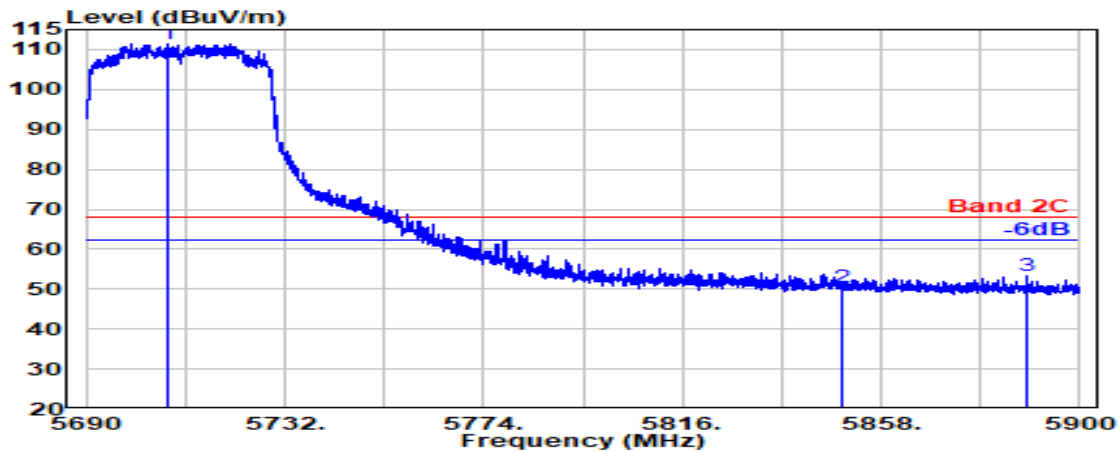


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.160	33.80	8.87	34.30	103.06	111.44	---	---	Peak
5850.000	34.10	8.95	34.36	41.91	50.59	68.20	17.61	Peak
5888.720	34.10	8.97	34.38	44.73	53.42	68.20	14.78	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

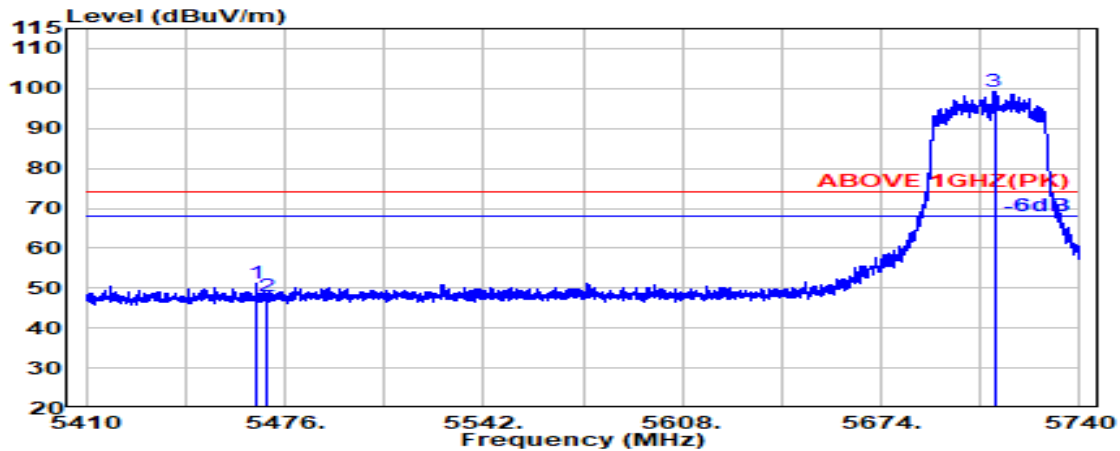

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.289	34.17	8.73	34.21	42.54	51.23	74.00	22.77	Peak
5470.000	34.16	8.74	34.21	39.23	47.91	74.00	26.09	Peak
@ 5711.620	33.80	8.87	34.30	90.72	99.09	---	---	Peak

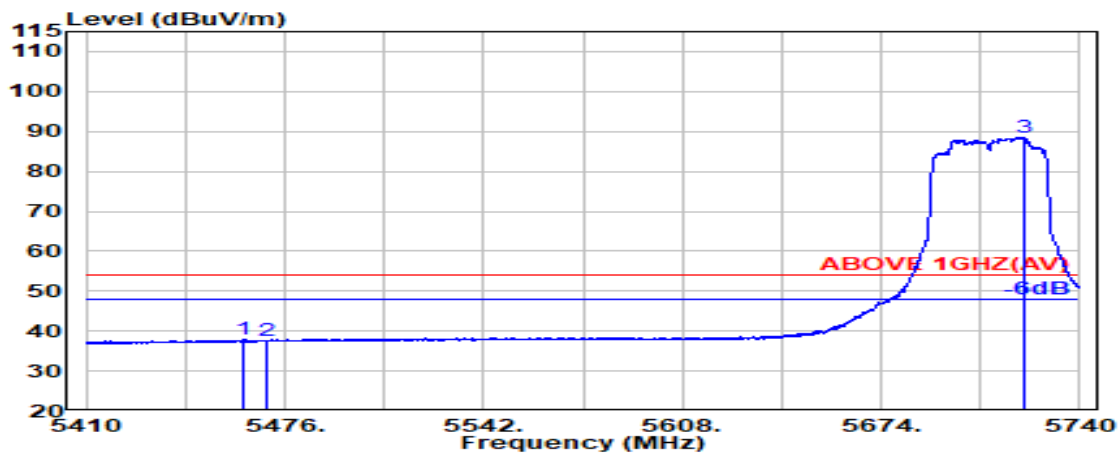


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.234	34.18	8.73	34.21	29.21	37.90	54.00	16.10	Peak
5470.000	34.16	8.74	34.21	28.81	37.49	54.00	16.51	Peak
@ 5721.143	33.80	8.88	34.30	80.22	88.59	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

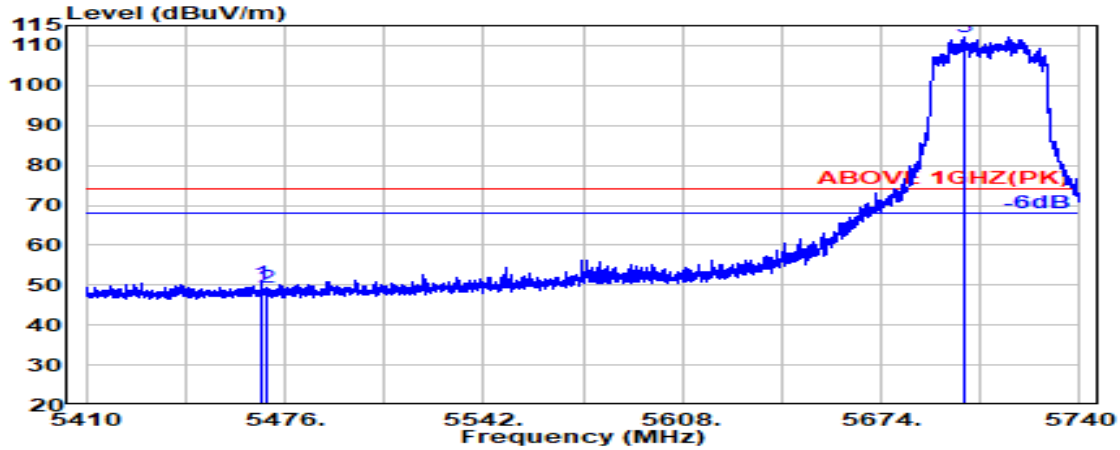

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.363	34.16	8.73	34.21	41.71	50.40	74.00	23.60	Peak
5470.000	34.16	8.74	34.21	40.58	49.26	74.00	24.74	Peak
@ 5701.343	33.80	8.87	34.30	103.88	112.25	---	---	Peak

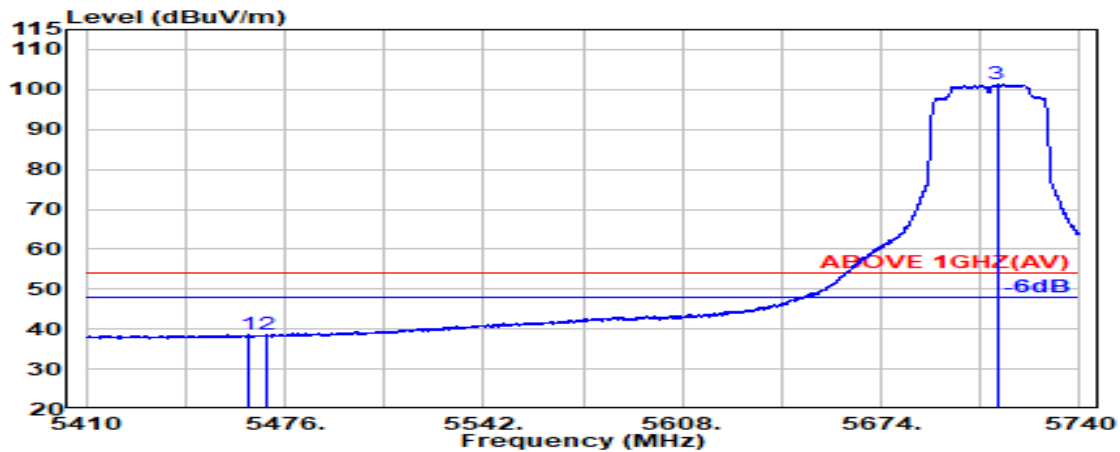


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.932	34.17	8.73	34.21	29.97	38.66	54.00	15.34	Peak
5470.000	34.16	8.74	34.21	29.86	38.54	54.00	15.46	Peak
@ 5712.469	33.80	8.87	34.30	92.95	101.32	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

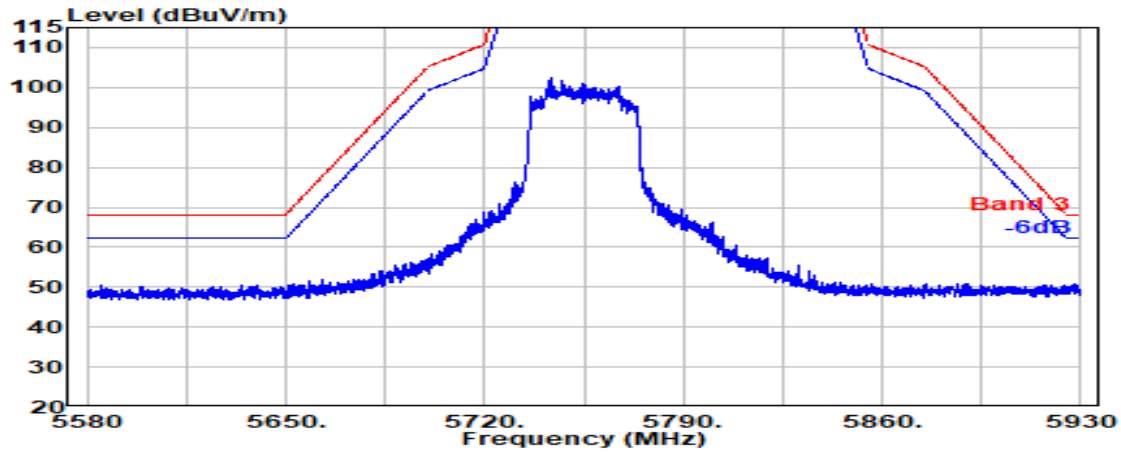


Antenna at Vertical Polarization

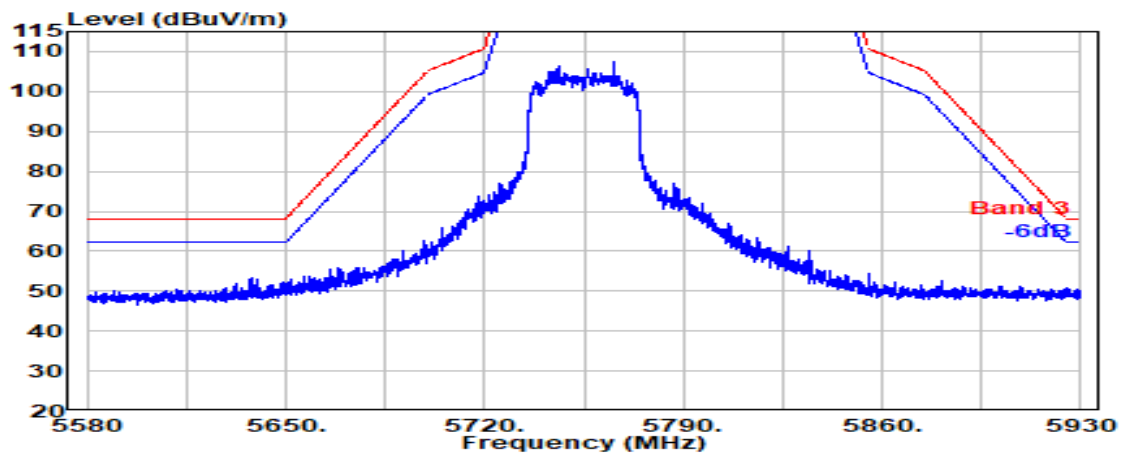

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

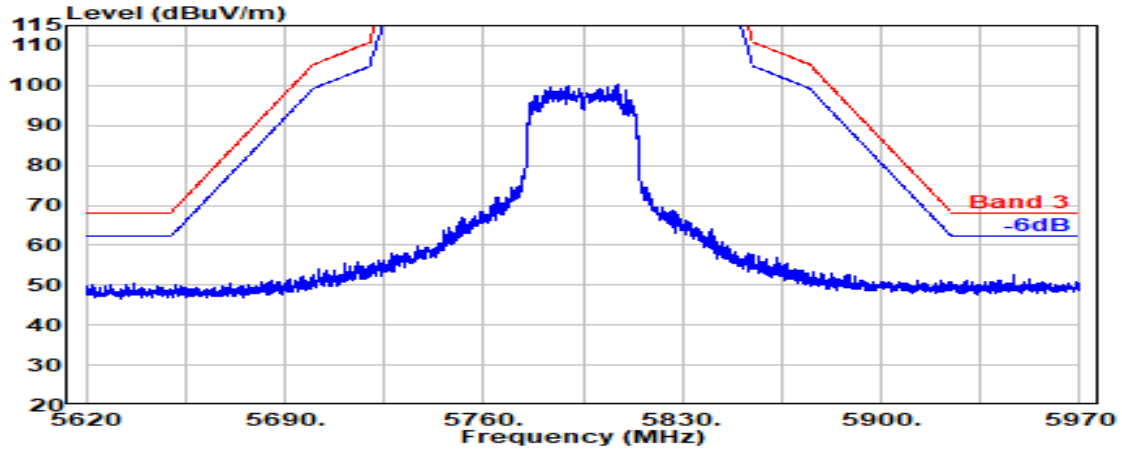

Antenna at Vertical Polarization

