

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	102
A.2.3 Emissions in Non-restricted Frequency Bands:.....	107
A.3 DTS/OCCUPIED BANDWIDTH	108
A.3.1 DTS/Occupied Bandwidth Result.....	108
A.3.2 Measurement Plots	110
A.4 MAXIMUM PEAK OUTPUT POWER	118
A.4.1 Peak Output Power	118
A.4.2 Average Output Power (Reporting only).....	122
A.5 EMISSION LIMITATIONS	125
A.6 POWER SPECTRAL DENSITY	153
A.6.1 Power Spectral Density Result	153
A.6.2 Measurement Plots	156

A.1 CONDUCTED EMISSION

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

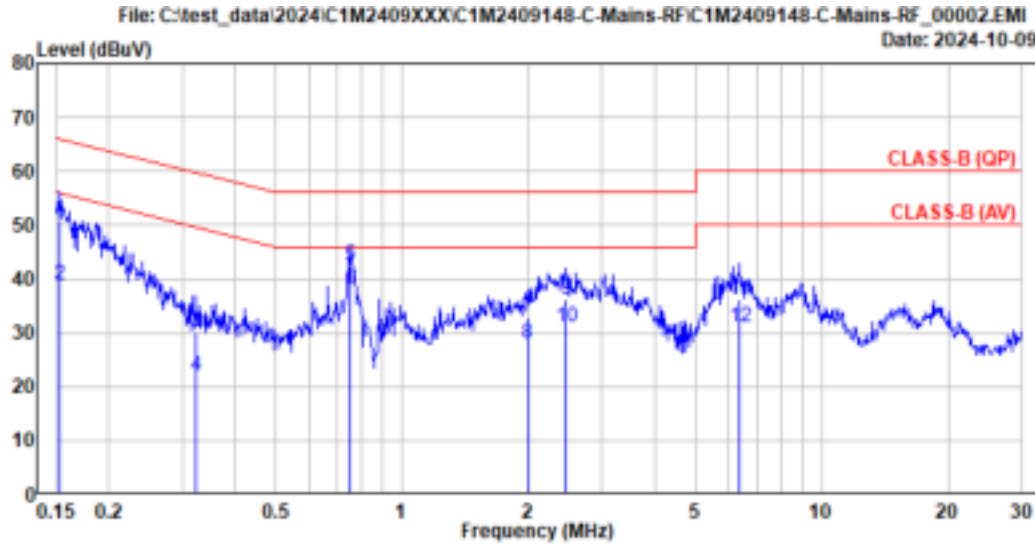


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 24°C/54%	Test Rating	: 120Vac/60Hz
EUT Model	: 16290TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AWF Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.27	0.03	9.85	30.84	50.99	65.88	14.89	QP
2	0.152	10.27	0.03	9.85	18.78	38.93	55.88	16.95	Average
3	0.322	10.26	0.03	9.85	10.07	30.21	59.67	29.46	QP
4	0.322	10.26	0.03	9.85	2.04	22.18	49.67	27.49	Average
5	0.754	10.27	0.04	9.85	22.54	42.70	56.00	13.30	QP
6	0.754	10.27	0.04	9.85	17.74	37.90	46.00	8.10	Average
7	1.993	10.29	0.06	9.86	12.71	32.92	56.00	23.08	QP
8	1.993	10.29	0.06	9.86	7.89	28.10	46.00	17.90	Average
9	2.457	10.30	0.07	9.86	16.06	36.29	56.00	19.71	QP
10	2.457	10.30	0.07	9.86	10.83	31.06	46.00	14.94	Average
11	6.367	10.45	0.10	9.87	15.67	36.09	60.00	23.91	QP
12	6.367	10.45	0.10	9.87	10.81	31.23	50.00	18.77	Average

Remarks: 1. Emission Level(dBµV)= AWF Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

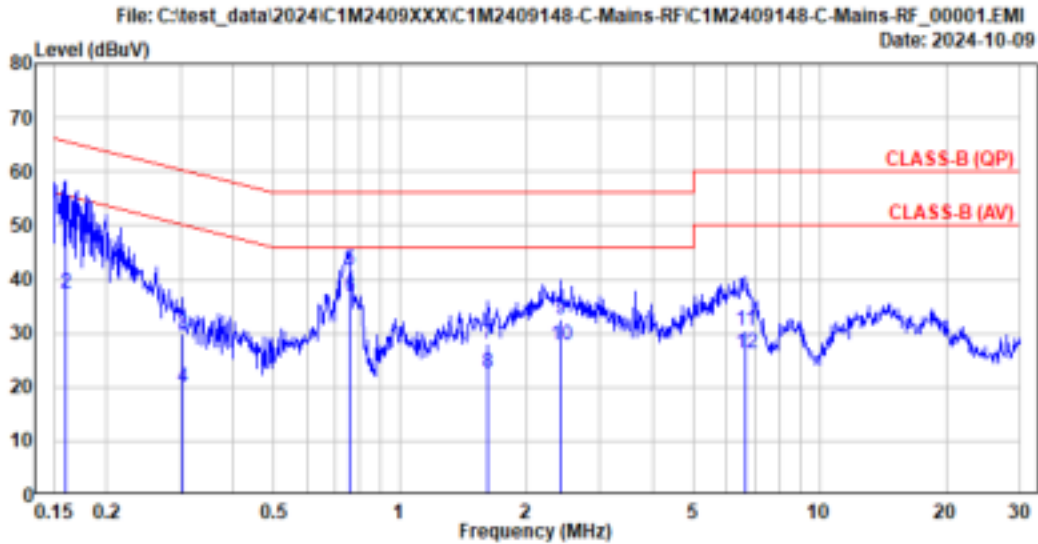

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 24°C/54%	Test Rating	: 120Vac/60Hz
EUT Model	: 16290TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.159	10.26	0.03	9.85	31.34	51.48	65.50	14.02	QP
2	0.159	10.26	0.03	9.85	17.39	37.53	55.50	17.97	Average
3	0.303	10.25	0.03	9.85	9.73	29.86	60.16	30.30	QP
4	0.303	10.25	0.03	9.85	-0.18	19.95	50.16	30.21	Average
5	0.758	10.26	0.04	9.85	21.54	41.69	56.00	14.31	QP
6	0.758	10.26	0.04	9.85	16.66	36.81	46.00	9.19	Average
7	1.617	10.27	0.05	9.86	7.96	28.14	56.00	27.86	QP
8	1.617	10.27	0.05	9.86	2.47	22.65	46.00	23.35	Average
9	2.421	10.28	0.07	9.86	12.47	32.68	56.00	23.32	QP
10	2.421	10.28	0.07	9.86	7.44	27.65	46.00	18.35	Average
11	6.659	10.38	0.11	9.87	10.11	30.47	60.00	29.53	QP
12	6.659	10.38	0.11	9.87	5.83	26.19	50.00	23.81	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/09/27 ~ 10/15	Temp./Hum.	23 ~ 24°C/55 ~ 61%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	23.36	1.39	26.50	34.25	32.49	40.00	7.51	Peak
74.000	12.11	2.19	26.39	43.68	31.58	40.00	8.42	Peak
148.500	16.41	3.05	26.04	39.71	33.12	43.50	10.38	Peak
227.000	16.58	3.82	25.77	39.30	33.93	46.00	12.07	Peak
445.500	21.93	6.20	26.86	37.10	38.37	46.00	7.63	Peak
776.000	24.91	7.69	27.37	35.14	40.37	46.00	5.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.500	22.91	1.40	26.50	39.83	37.64	40.00	2.36	Peak
91.500	15.02	2.39	26.34	47.21	38.28	43.50	5.22	Peak
148.500	16.41	3.05	26.04	44.68	38.10	43.50	5.40	Peak
224.500	16.44	3.79	25.78	40.90	35.36	46.00	10.64	Peak
345.500	19.84	5.13	26.08	38.35	37.25	46.00	8.75	Peak
445.500	21.93	6.20	26.86	38.41	39.67	46.00	6.33	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.500	22.91	1.40	26.50	33.89	31.70	40.00	8.30	Peak
74.000	12.11	2.19	26.39	43.37	31.27	40.00	8.73	Peak
148.500	16.41	3.05	26.04	38.75	32.17	43.50	11.33	Peak
222.500	16.31	3.77	25.78	34.97	29.27	46.00	16.73	Peak
445.500	21.93	6.20	26.86	34.87	36.14	46.00	9.86	Peak
777.000	24.91	7.69	27.36	34.44	39.68	46.00	6.32	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
57.500	12.36	1.90	26.46	47.88	35.69	40.00	4.31	Peak
91.500	15.02	2.39	26.34	48.71	39.78	43.50	3.72	Peak
148.500	16.41	3.05	26.04	42.09	35.51	43.50	7.99	Peak
345.500	19.84	5.13	26.08	39.27	38.17	46.00	7.83	Peak
445.500	21.93	6.20	26.86	38.34	39.61	46.00	6.39	Peak
540.000	23.34	6.71	27.33	31.11	33.83	46.00	12.17	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

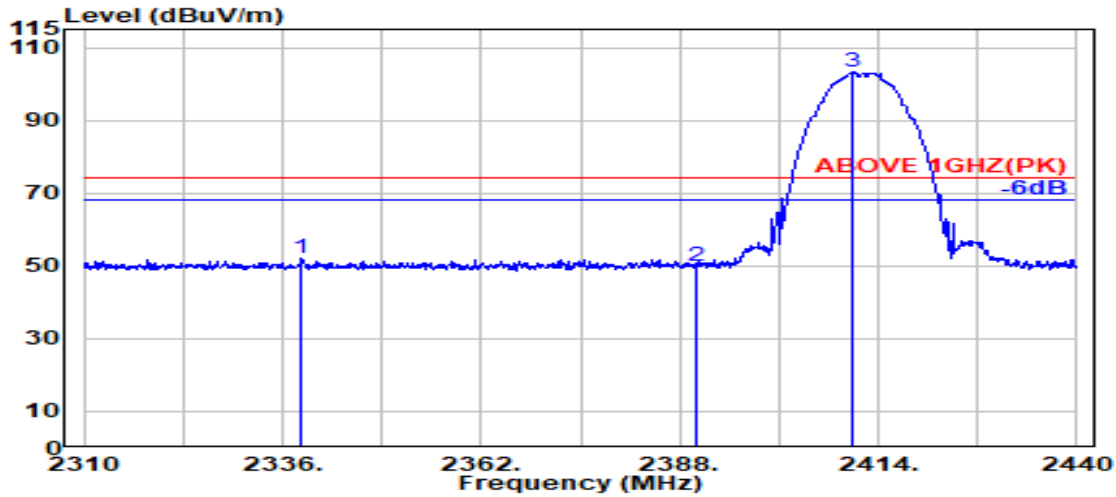

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2338.500	28.23	5.66	39.88	58.16	52.17	74.00	21.83	Peak
2390.000	28.14	5.72	39.88	56.13	50.11	74.00	23.89	Peak
@ 2410.700	28.14	5.75	39.88	109.16	103.17	---	---	Peak

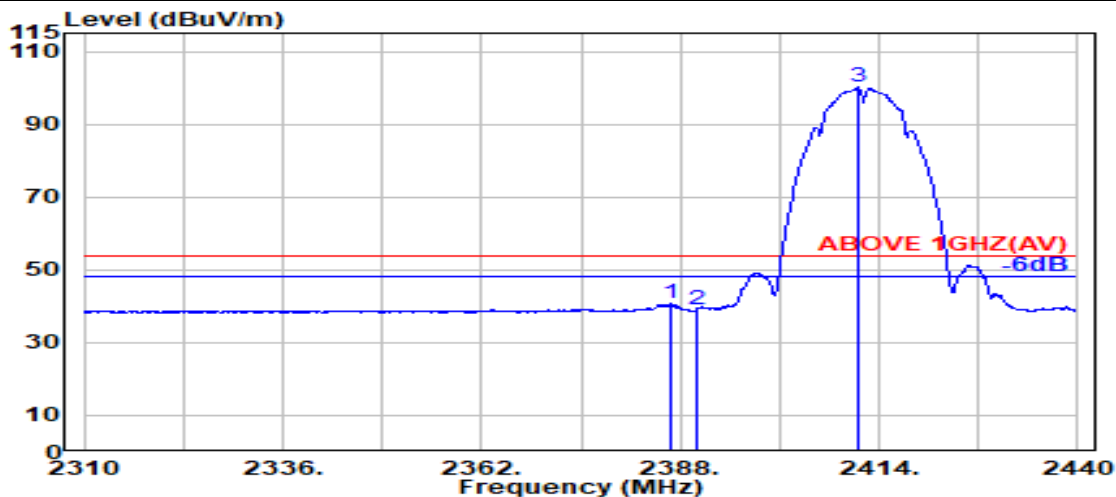


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.600	28.15	5.72	39.88	46.64	40.63	54.00	13.37	Average
2390.000	28.14	5.72	39.88	45.28	39.26	54.00	14.74	Average
@ 2411.200	28.15	5.75	39.88	106.09	100.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

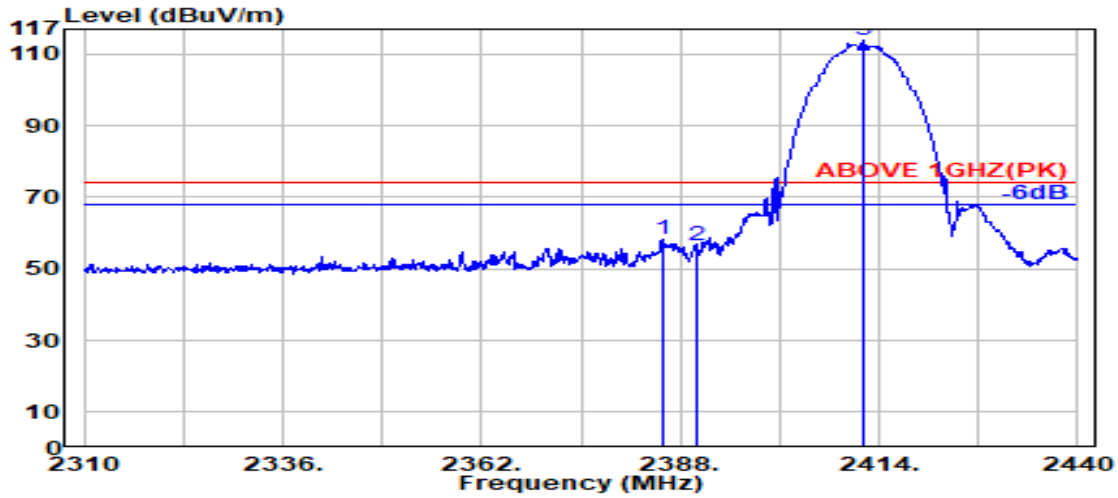

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.800	28.16	5.72	39.88	64.08	58.08	74.00	15.92	Peak
2390.000	28.14	5.72	39.88	62.32	56.31	74.00	17.69	Peak
@ 2412.100	28.15	5.75	39.88	119.86	113.88	---	---	Peak

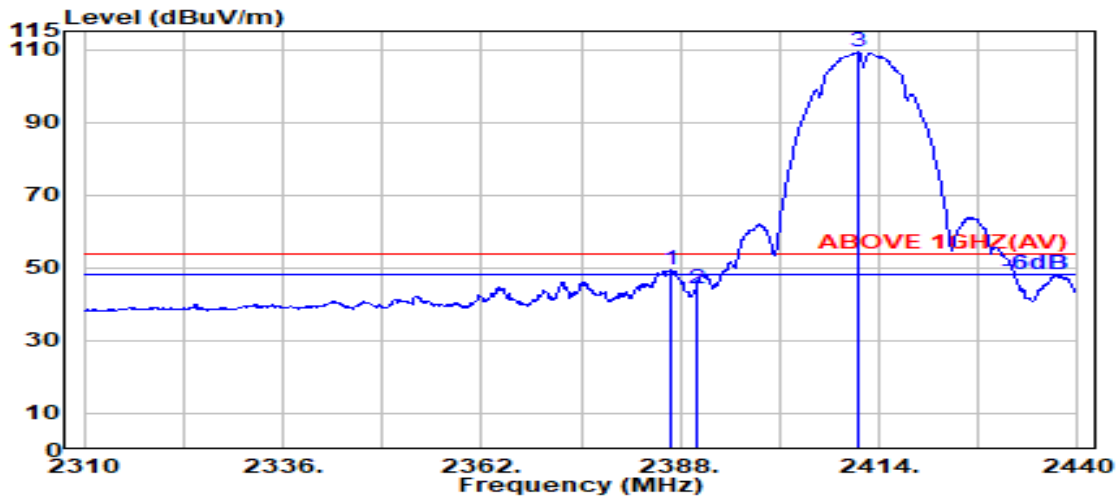


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.15	5.72	39.88	55.67	49.66	54.00	4.34	Average
2390.000	28.14	5.72	39.88	50.16	44.14	54.00	9.86	Average
@ 2411.200	28.15	5.75	39.88	115.32	109.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

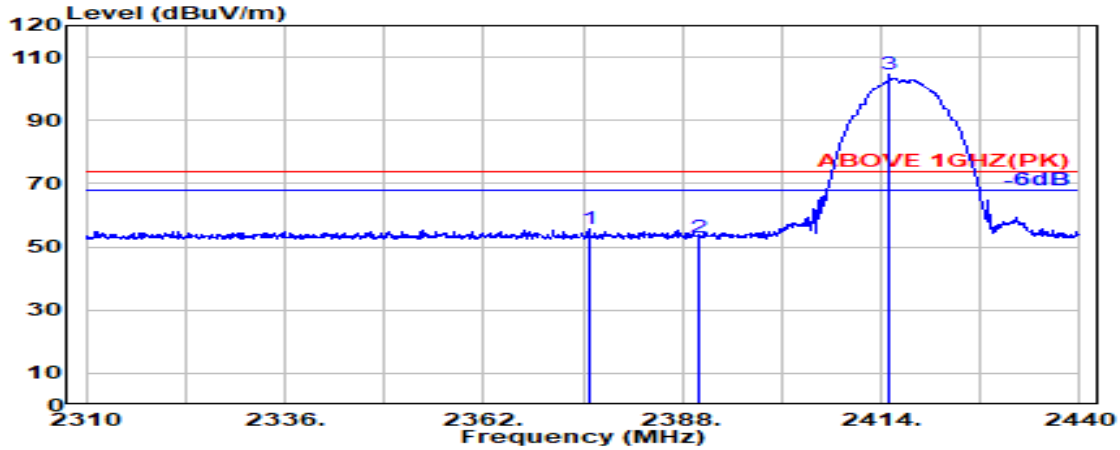

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.700	28.20	5.70	39.88	61.74	55.76	74.00	18.24	Peak
2390.000	28.14	5.72	39.88	59.15	53.13	74.00	20.87	Peak
@ 2415.100	28.16	5.75	39.88	110.35	104.38	---	---	Peak

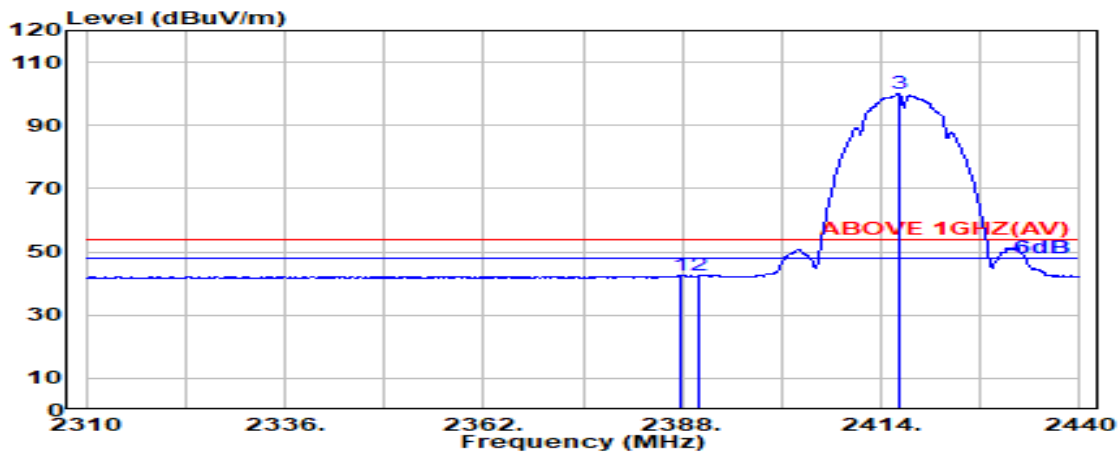


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	28.15	5.72	39.88	48.49	42.47	54.00	11.53	Average
2390.000	28.14	5.72	39.88	48.39	42.37	54.00	11.63	Average
@ 2416.300	28.17	5.75	39.88	105.85	99.90	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

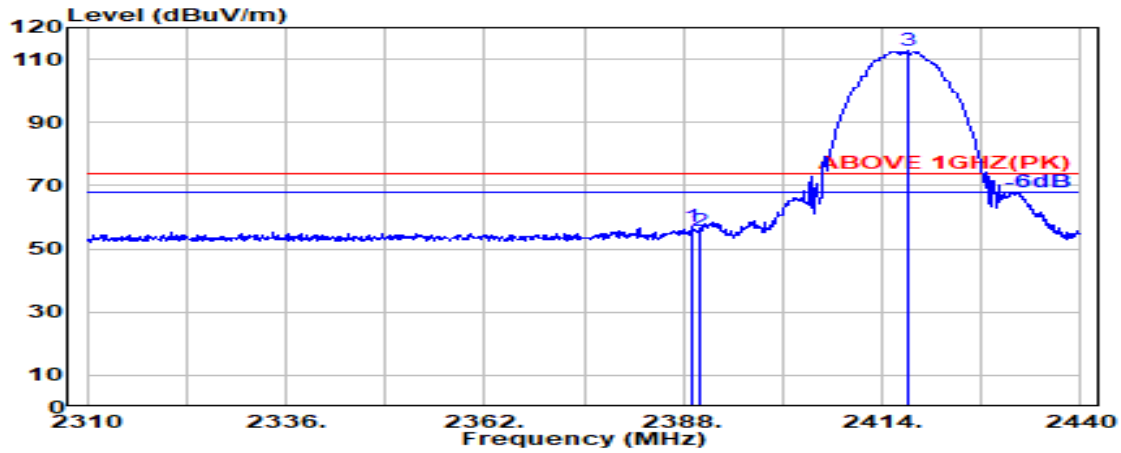

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.88	63.28	57.26	74.00	16.74	Peak
2390.000	28.14	5.72	39.88	61.81	55.79	74.00	18.21	Peak
@ 2417.500	28.17	5.75	39.88	118.54	112.59	---	---	Peak

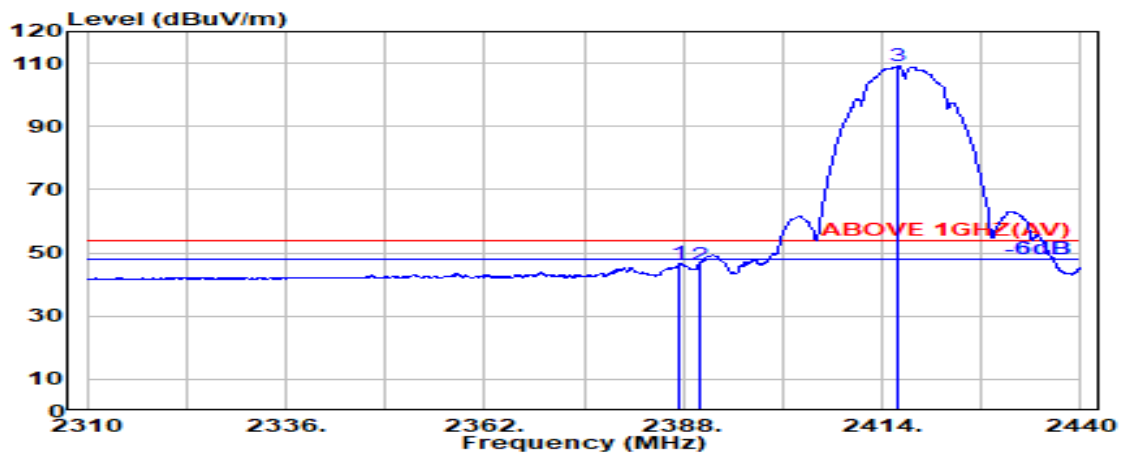


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.600	28.15	5.72	39.88	52.61	46.60	54.00	7.40	Average
2390.000	28.14	5.72	39.88	52.18	46.17	54.00	7.83	Average
@ 2416.200	28.17	5.75	39.88	115.23	109.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2422MHz
------	---------	-----------	------------

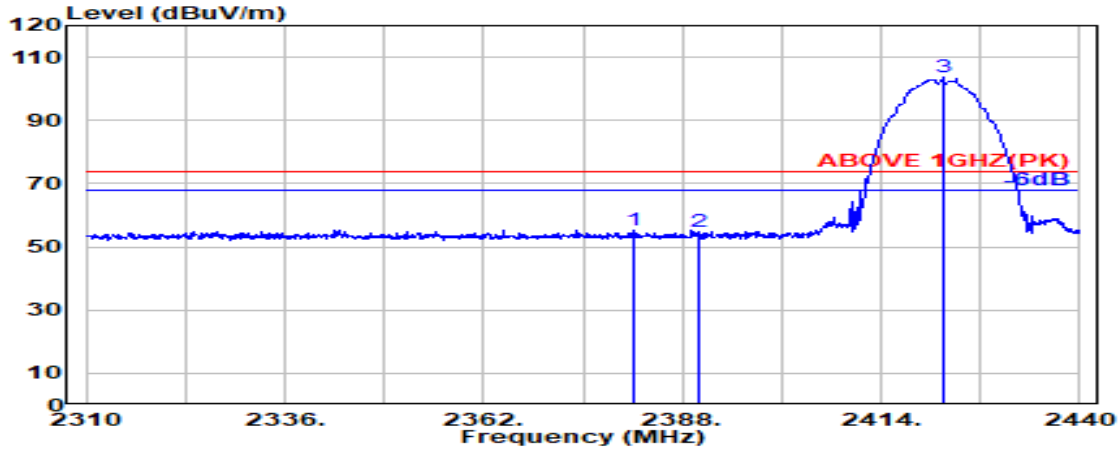

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.600	28.17	5.71	39.88	61.26	55.26	74.00	18.74	Peak
2390.000	28.14	5.72	39.88	60.72	54.70	74.00	19.30	Peak
@ 2422.100	28.19	5.76	39.88	109.78	103.85	---	---	Peak

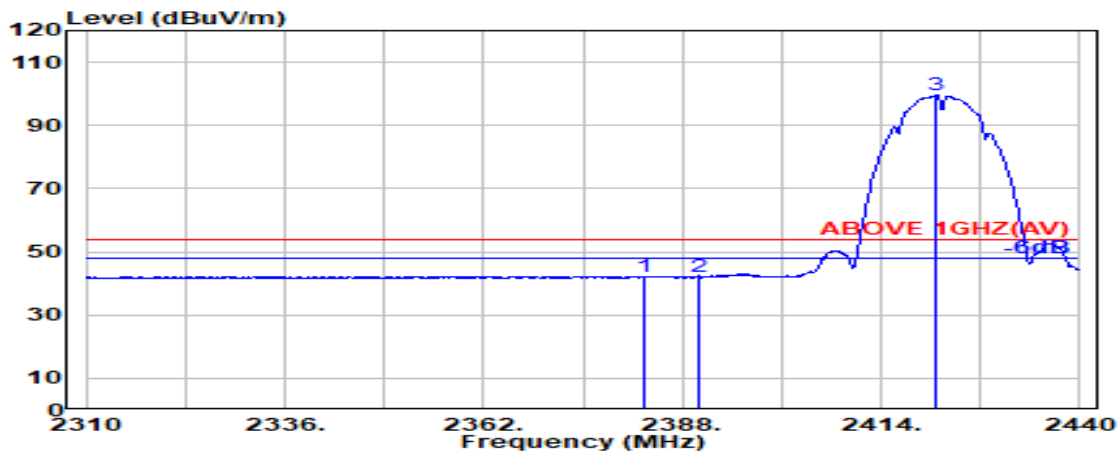


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.100	28.17	5.71	39.88	48.28	42.28	54.00	11.72	Average
2390.000	28.14	5.72	39.88	48.09	42.07	54.00	11.93	Average
@ 2421.300	28.19	5.76	39.88	105.68	99.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2422MHz
------	---------	-----------	------------

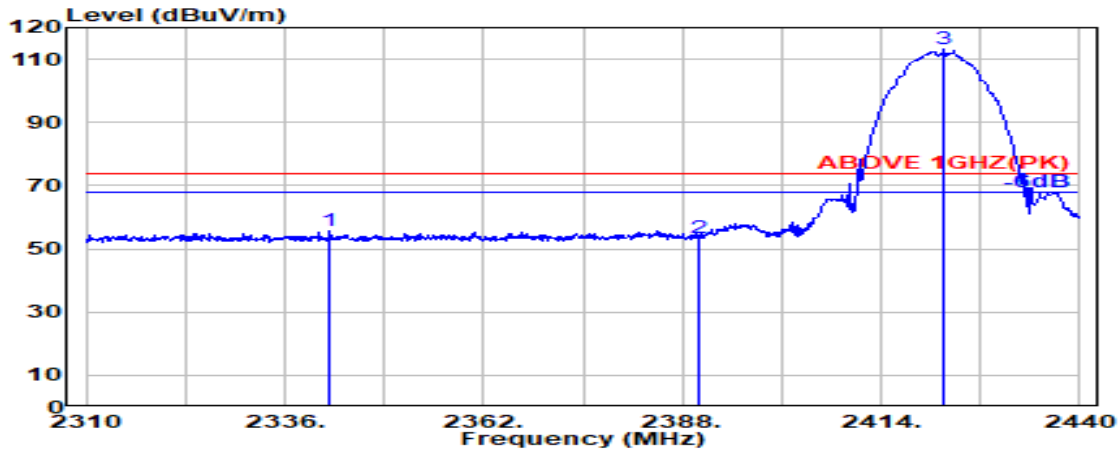

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	28.25	5.66	39.88	61.71	55.75	74.00	18.25	Peak
2390.000	28.14	5.72	39.88	59.49	53.47	74.00	20.53	Peak
@ 2422.300	28.19	5.76	39.88	119.31	113.38	---	---	Peak

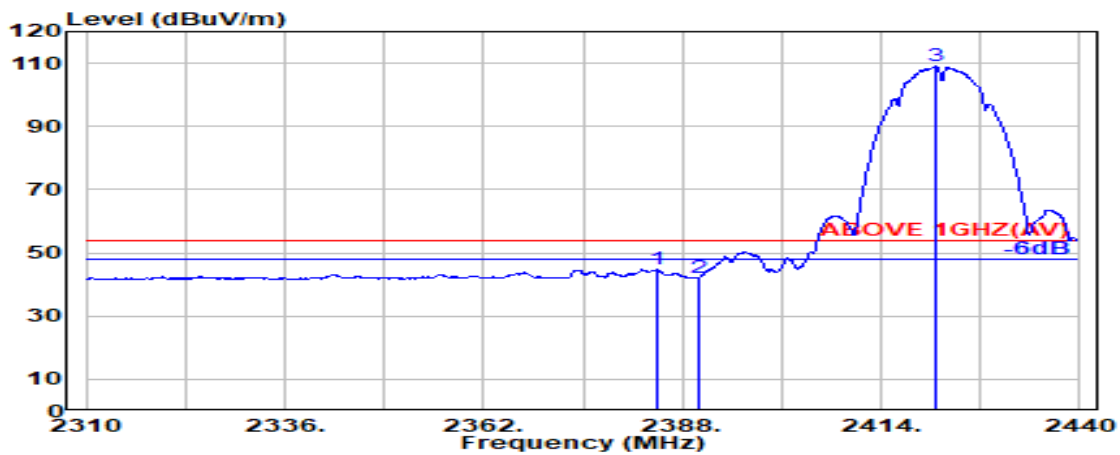


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.600	28.16	5.71	39.88	50.72	44.71	54.00	9.29	Average
2390.000	28.14	5.72	39.88	48.08	42.07	54.00	11.93	Average
@ 2421.200	28.19	5.76	39.88	114.95	109.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

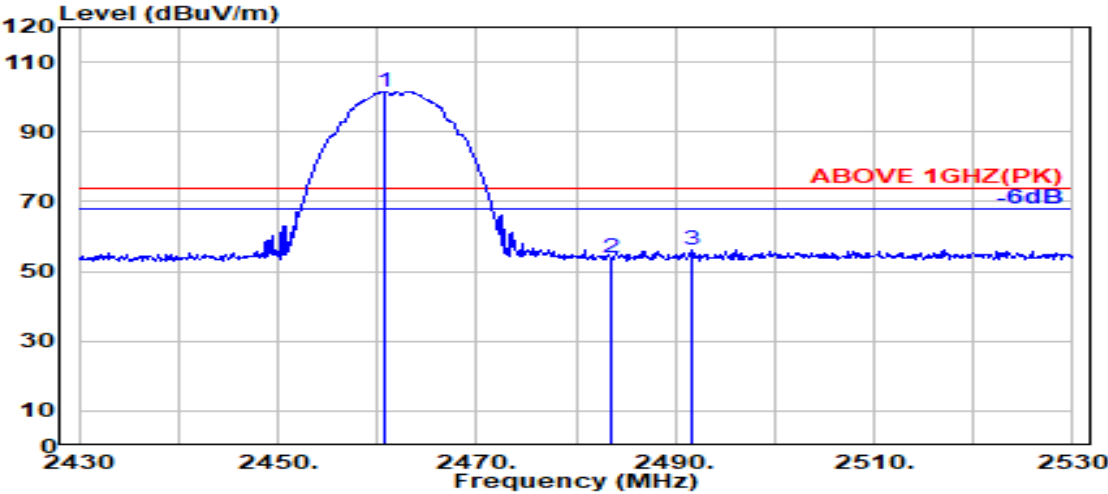

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	28.32	5.80	39.87	107.38	101.64	---	---	Peak
2483.500	28.37	5.83	39.87	59.54	53.87	74.00	20.13	Peak
2491.600	28.38	5.84	39.87	61.81	56.16	74.00	17.84	Peak

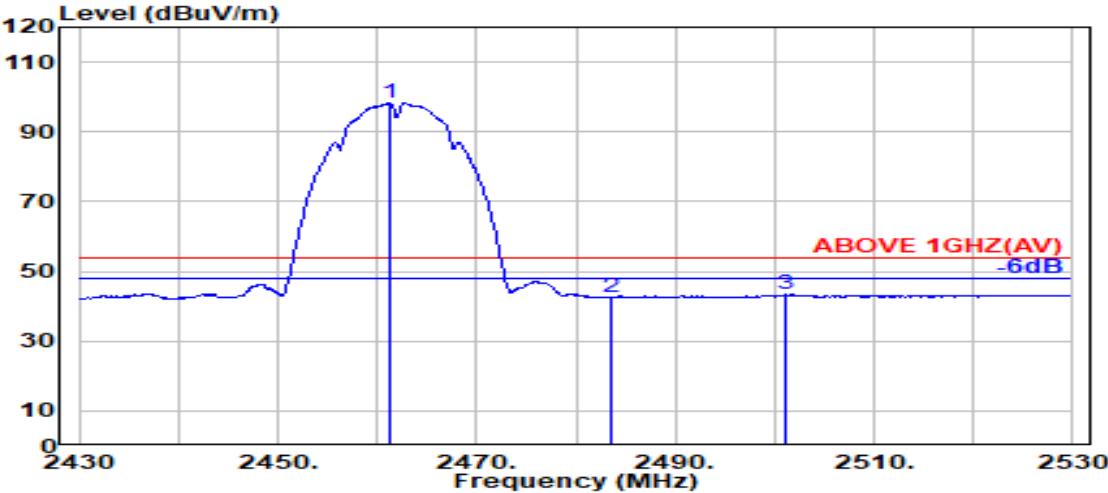


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.32	5.81	39.87	104.13	98.38	---	---	Average
2483.500	28.37	5.83	39.87	48.26	42.59	54.00	11.41	Average
2501.200	28.41	5.85	39.87	48.98	43.36	54.00	10.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

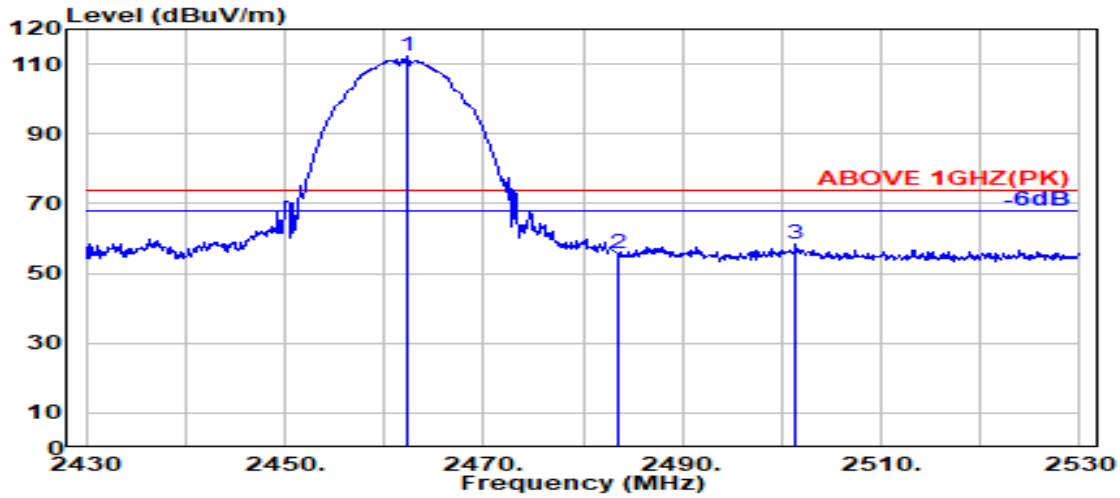

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.200	28.32	5.81	39.87	118.06	112.32	---	---	Peak
2483.500	28.37	5.83	39.87	61.46	55.79	74.00	18.21	Peak
2501.400	28.41	5.85	39.87	64.22	58.61	74.00	15.39	Peak

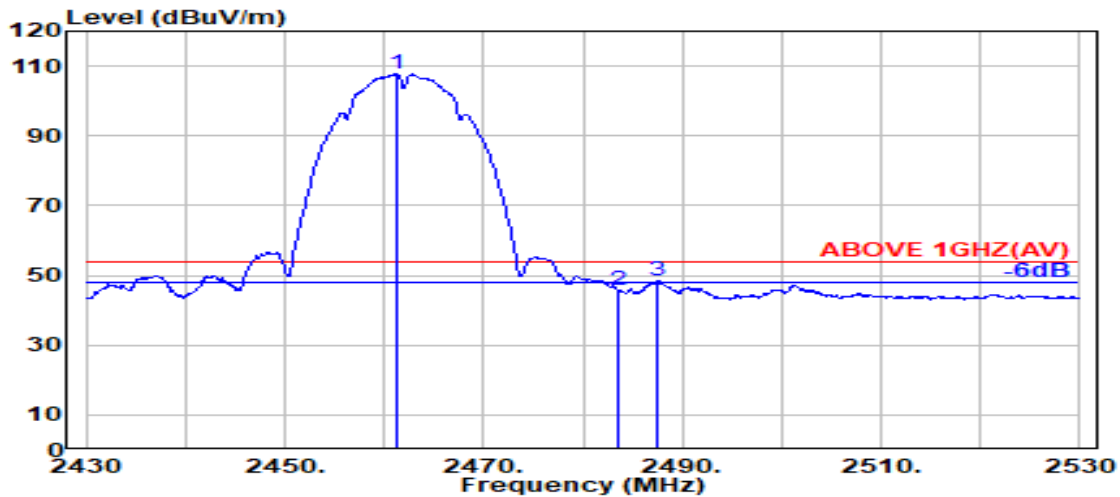


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.32	5.81	39.87	113.56	107.81	---	---	Average
2483.500	28.37	5.83	39.87	51.43	45.75	54.00	8.25	Average
2487.500	28.38	5.84	39.87	53.92	48.26	54.00	5.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

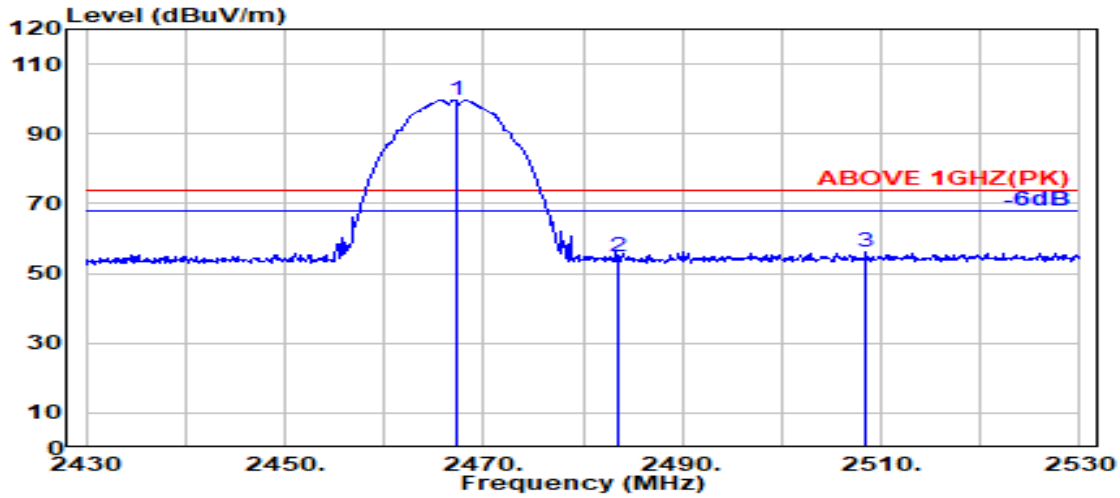

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.400	28.34	5.81	39.87	105.49	99.77	---	---	Peak
2483.500	28.37	5.83	39.87	60.31	54.63	74.00	19.37	Peak
2508.400	28.45	5.86	39.87	61.75	56.19	74.00	17.81	Peak

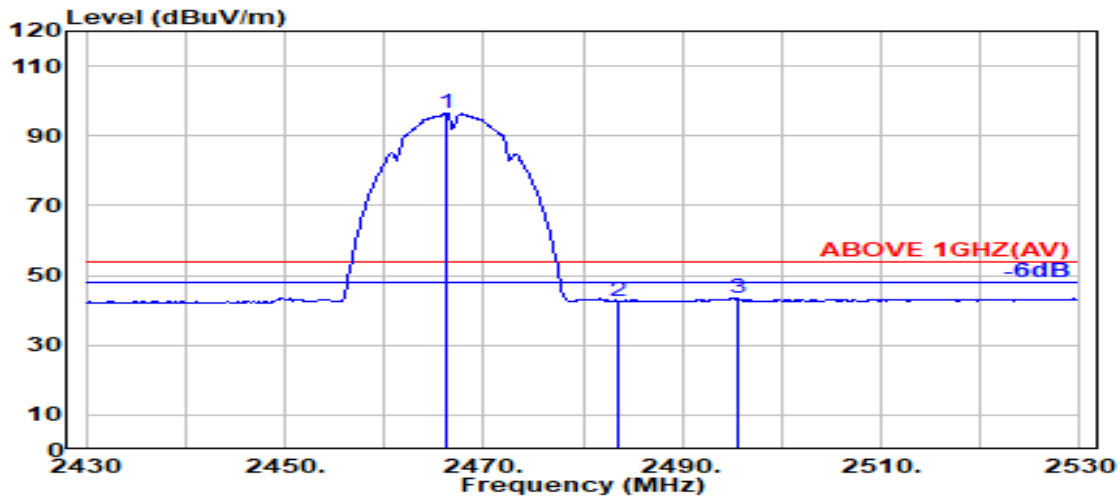


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.33	5.81	39.87	102.24	96.51	---	---	Average
2483.500	28.37	5.83	39.87	48.32	42.65	54.00	11.35	Average
2495.500	28.39	5.84	39.87	49.08	43.45	54.00	10.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

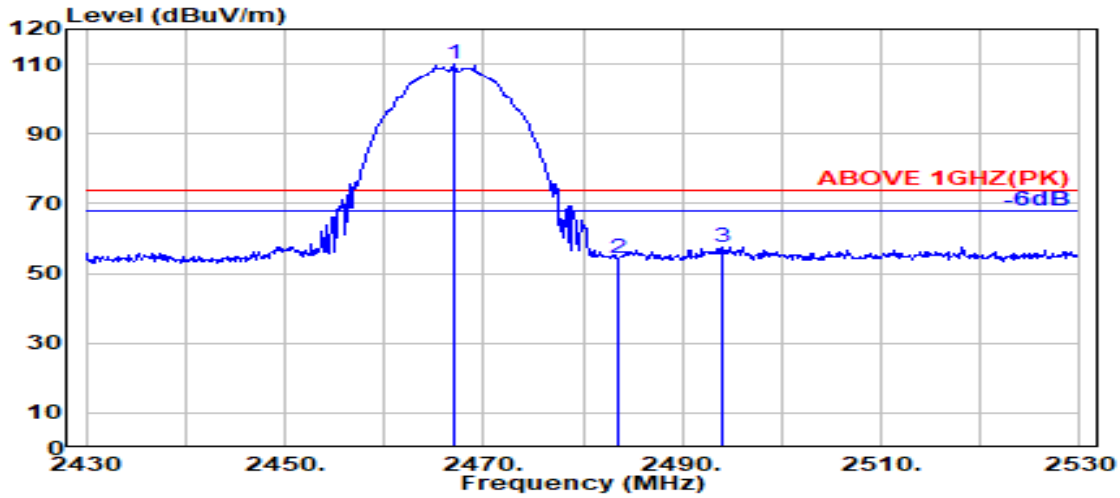

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.33	5.81	39.87	115.90	110.17	---	---	Peak
2483.500	28.37	5.83	39.87	60.01	54.34	74.00	19.66	Peak
2494.100	28.39	5.84	39.87	63.17	57.53	74.00	16.47	Peak

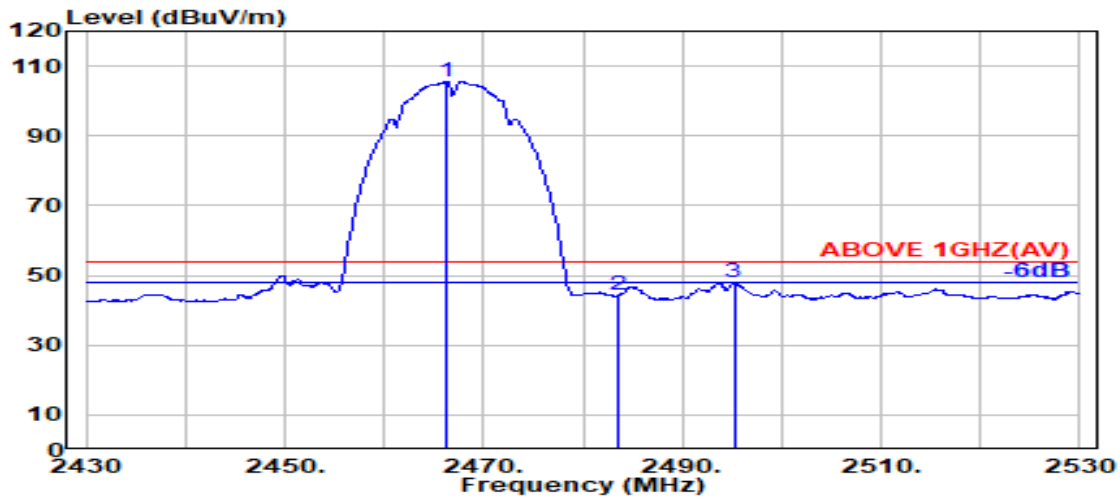


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.33	5.81	39.87	111.43	105.70	---	---	Average
2483.500	28.37	5.83	39.87	49.95	44.28	54.00	9.72	Average
2495.200	28.39	5.84	39.87	53.60	47.97	54.00	6.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

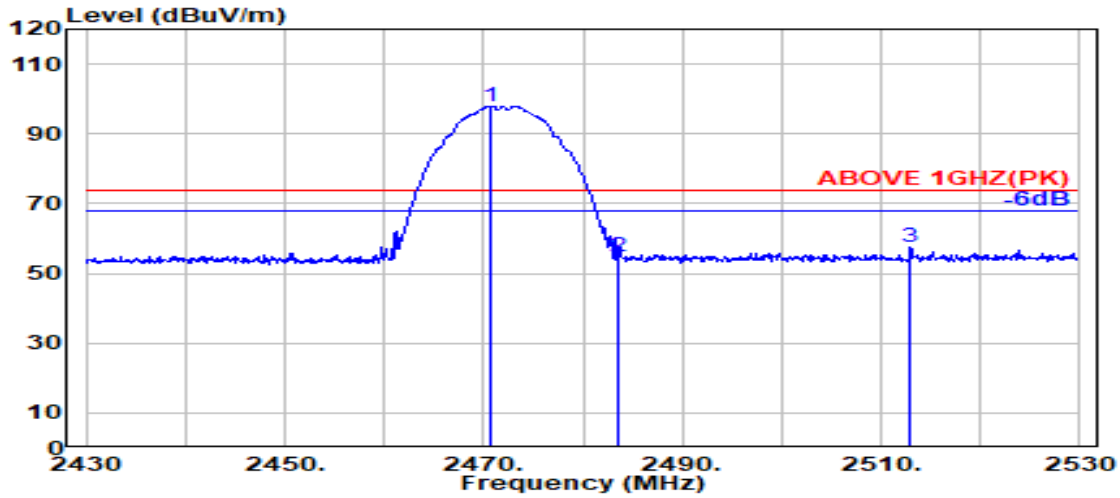

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.34	5.82	39.87	103.65	97.94	---	---	Peak
2483.500	28.37	5.83	39.87	60.59	54.92	74.00	19.08	Peak
2513.000	28.48	5.87	39.87	62.97	57.44	74.00	16.56	Peak

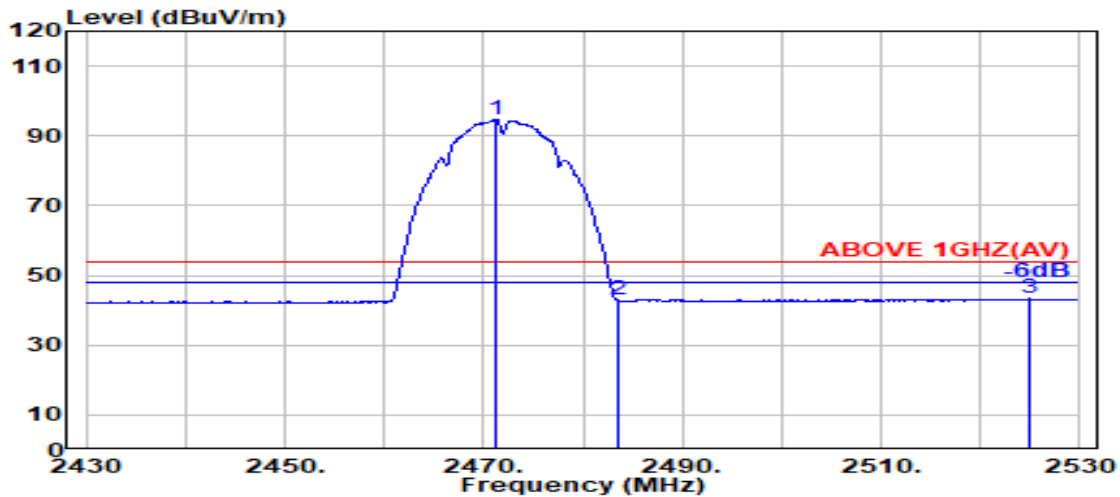


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.34	5.82	39.87	100.42	94.70	---	---	Average
2483.500	28.37	5.83	39.87	48.50	42.82	54.00	11.18	Average
2525.000	28.55	5.88	39.88	48.70	43.25	54.00	10.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

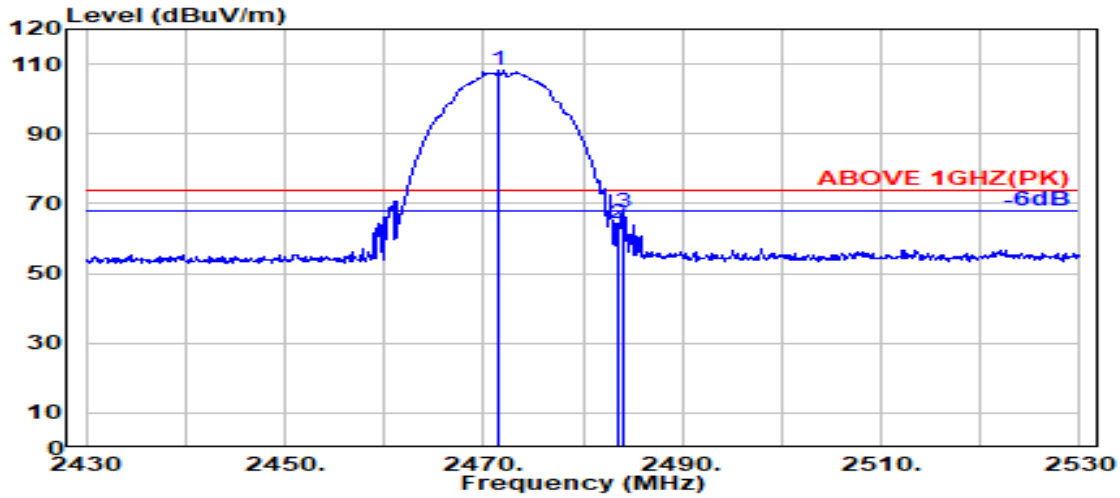

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	28.34	5.82	39.87	114.13	108.42	---	---	Peak
2483.500	28.37	5.83	39.87	70.15	64.47	74.00	9.53	Peak
2484.000	28.37	5.83	39.87	73.09	67.42	74.00	6.58	Peak

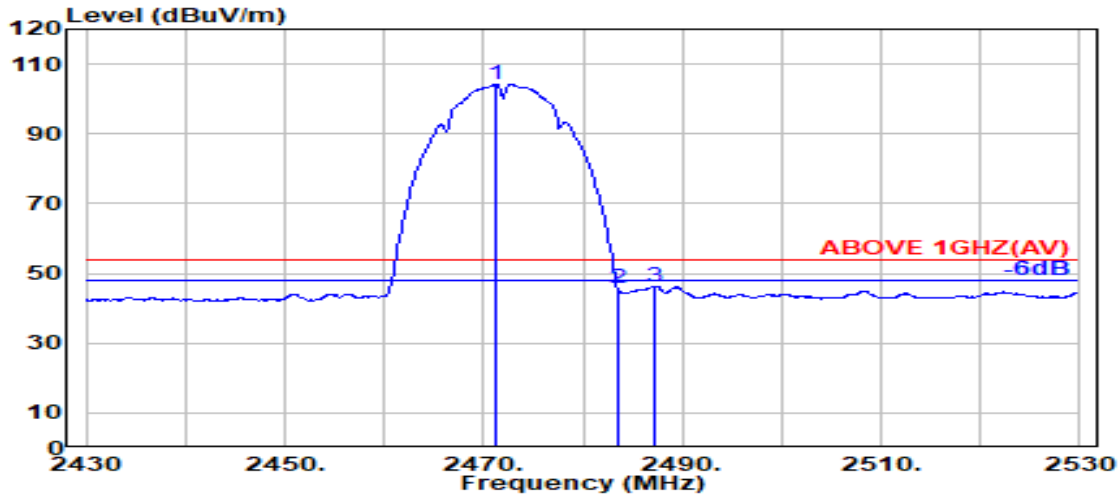


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.34	5.82	39.87	110.02	104.30	---	---	Average
2483.500	28.37	5.83	39.87	51.37	45.69	54.00	8.31	Average
2487.200	28.37	5.84	39.87	52.04	46.38	54.00	7.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

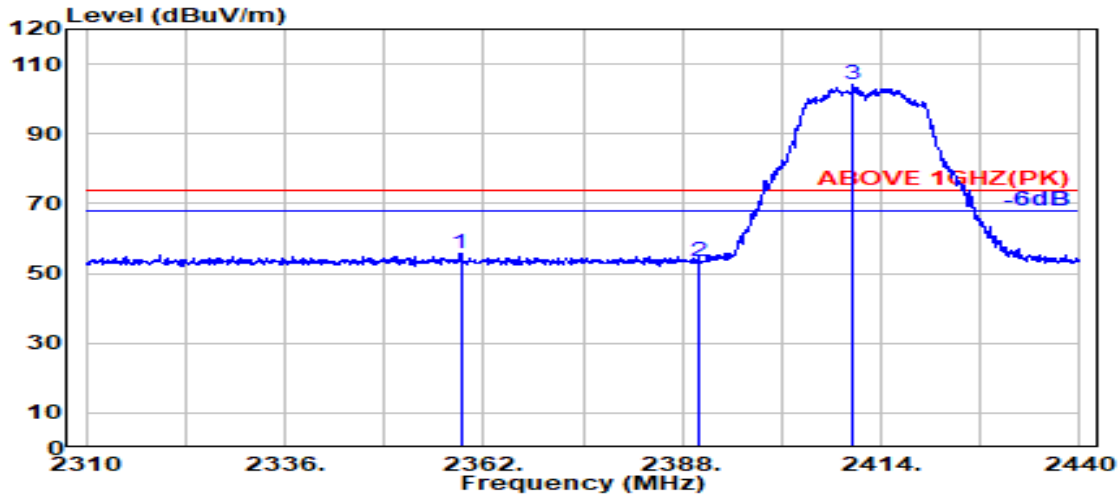

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2359.000	28.26	5.68	39.88	61.65	55.72	74.00	18.28	Peak
2390.000	28.14	5.72	39.88	59.47	53.45	74.00	20.55	Peak
@ 2410.400	28.14	5.75	39.88	109.93	103.94	---	---	Peak

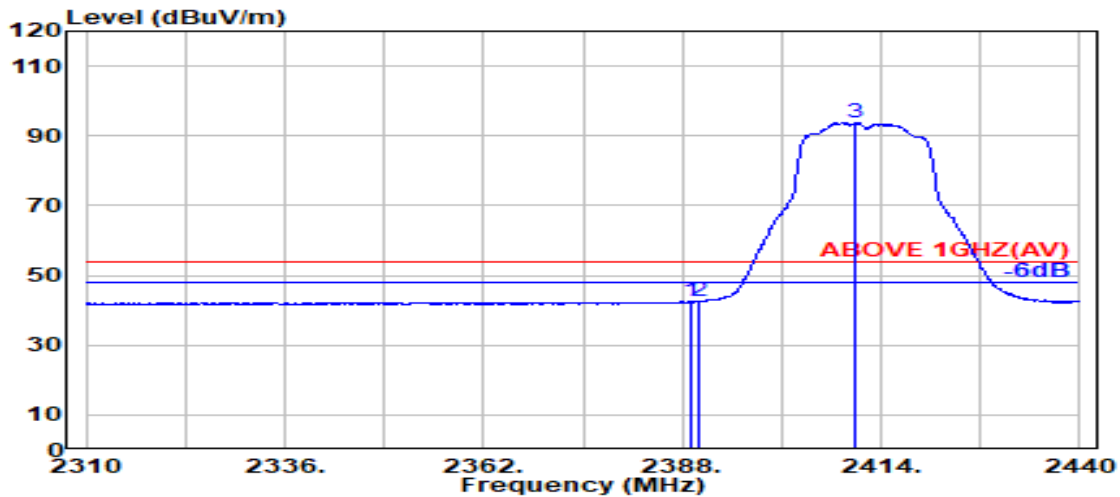


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	48.50	42.48	54.00	11.52	Average
2390.000	28.14	5.72	39.88	48.43	42.41	54.00	11.59	Average
@ 2410.700	28.14	5.75	39.88	99.76	93.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

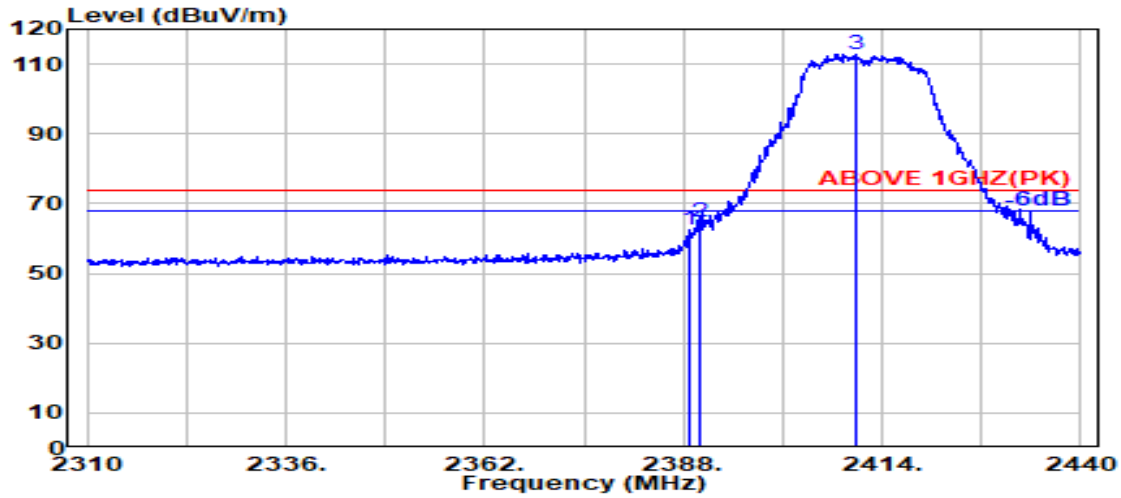

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.14	5.72	39.88	68.33	62.31	74.00	11.69	Peak
2390.000	28.14	5.72	39.88	70.76	64.74	74.00	9.26	Peak
@ 2410.500	28.14	5.75	39.88	118.76	112.77	---	---	Peak

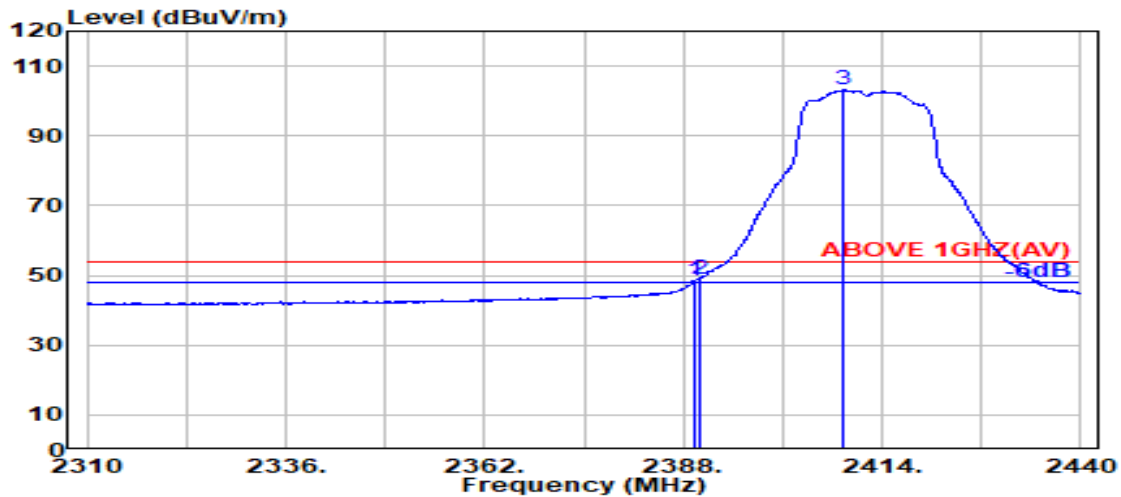


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	54.66	48.65	54.00	5.35	Average
2390.000	28.14	5.72	39.88	55.03	49.01	54.00	4.99	Average
@ 2409.000	28.14	5.74	39.88	109.23	103.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

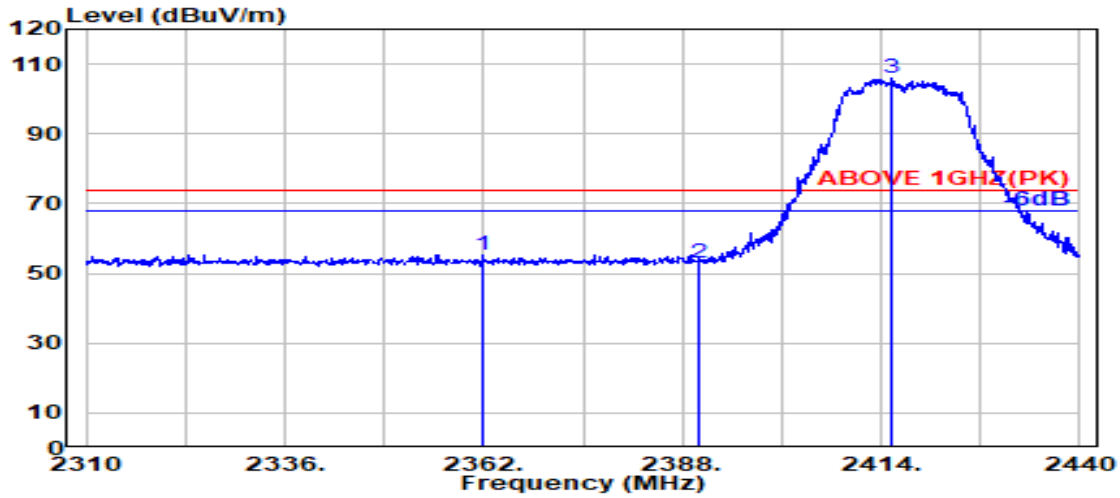

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2361.900	28.25	5.69	39.88	61.37	55.42	74.00	18.58	Peak
2390.000	28.14	5.72	39.88	59.02	53.00	74.00	21.00	Peak
@ 2415.400	28.16	5.75	39.88	111.95	105.98	---	---	Peak

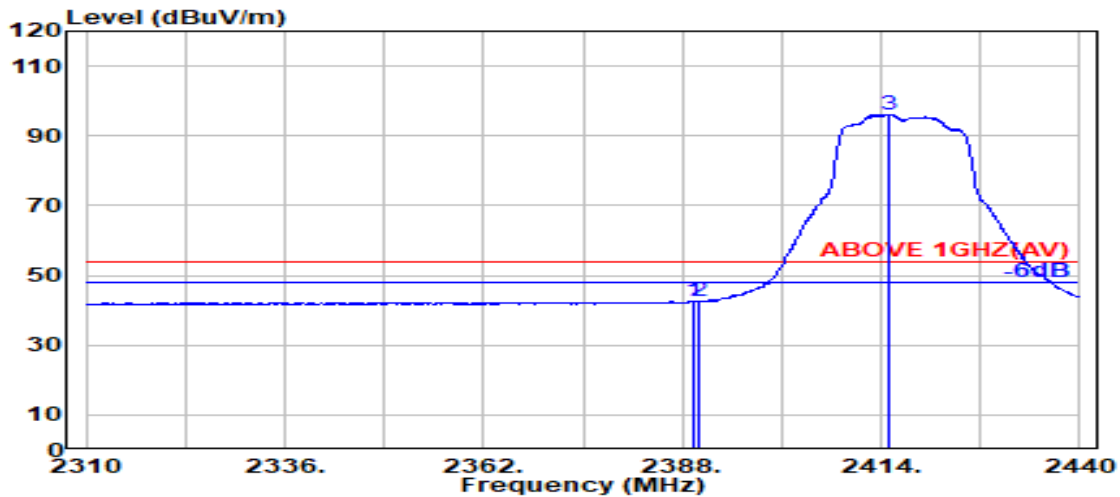


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	48.70	42.68	54.00	11.32	Average
2390.000	28.14	5.72	39.88	48.48	42.46	54.00	11.54	Average
@ 2414.900	28.16	5.75	39.88	102.01	96.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

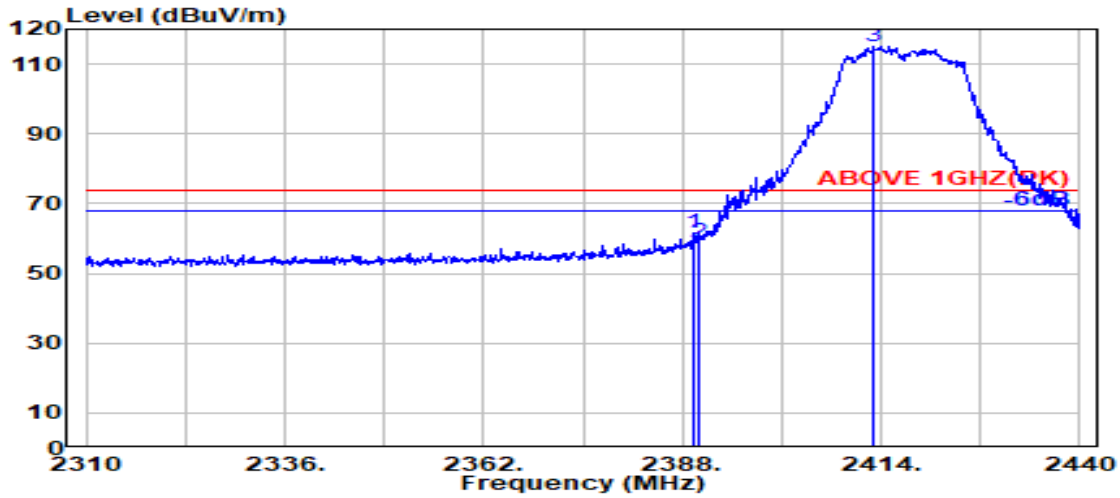

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	67.67	61.65	74.00	12.35	Peak
2390.000	28.14	5.72	39.88	64.67	58.65	74.00	15.35	Peak
@ 2413.000	28.15	5.75	39.88	121.06	115.08	---	---	Peak

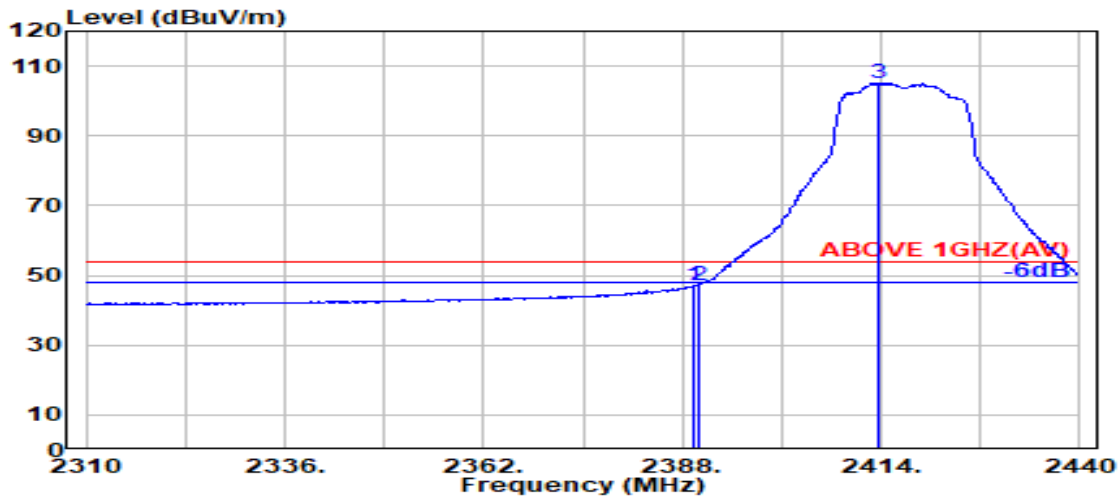


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	53.04	47.03	54.00	6.97	Average
2390.000	28.14	5.72	39.88	53.26	47.24	54.00	6.76	Average
@ 2413.600	28.15	5.75	39.88	111.24	105.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

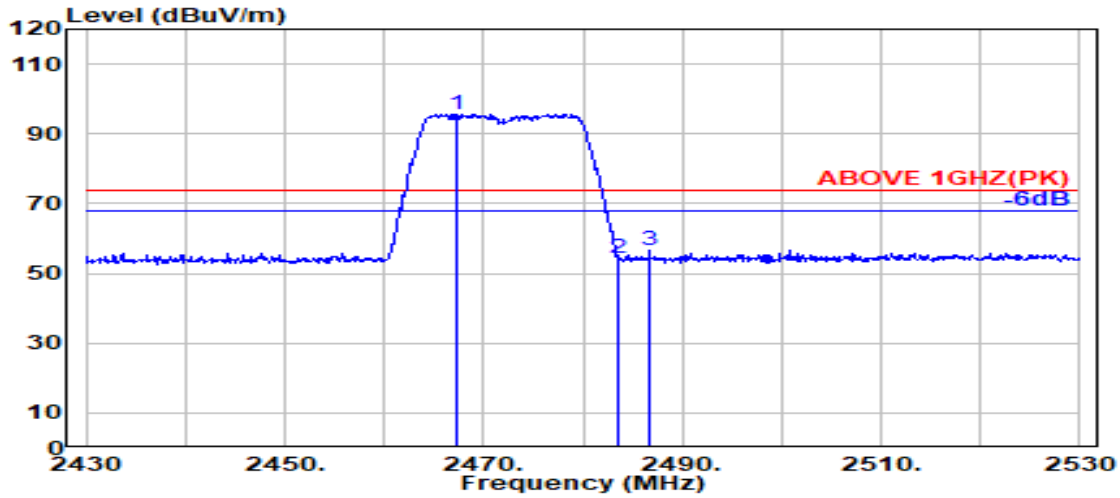

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.400	28.34	5.81	39.87	101.40	95.67	---	---	Peak
2483.500	28.37	5.83	39.87	60.13	54.46	74.00	19.54	Peak
2486.700	28.37	5.83	39.87	62.08	56.41	74.00	17.59	Peak

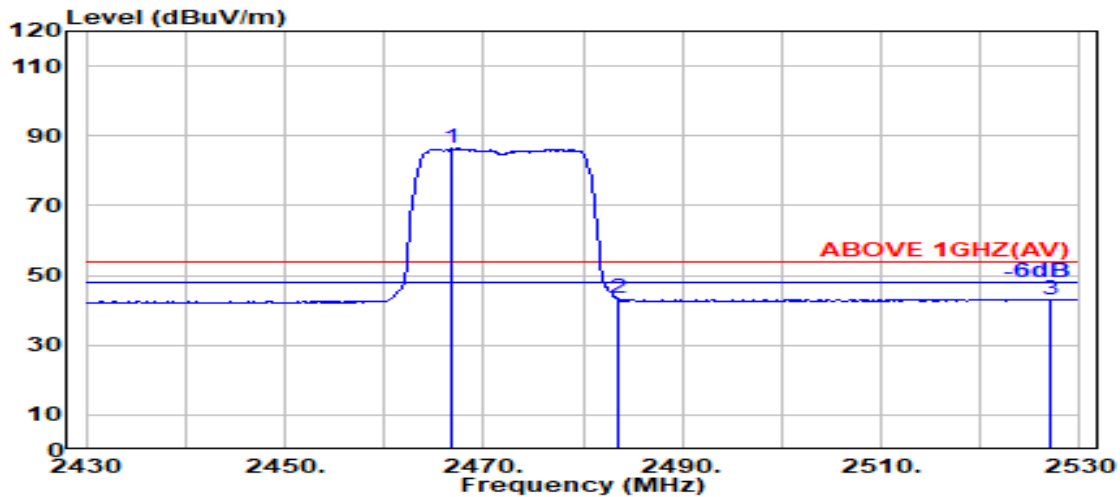


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.900	28.33	5.81	39.87	92.12	86.39	---	---	Average
2483.500	28.37	5.83	39.87	49.02	43.35	54.00	10.65	Average
2527.000	28.56	5.88	39.88	48.63	43.19	54.00	10.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

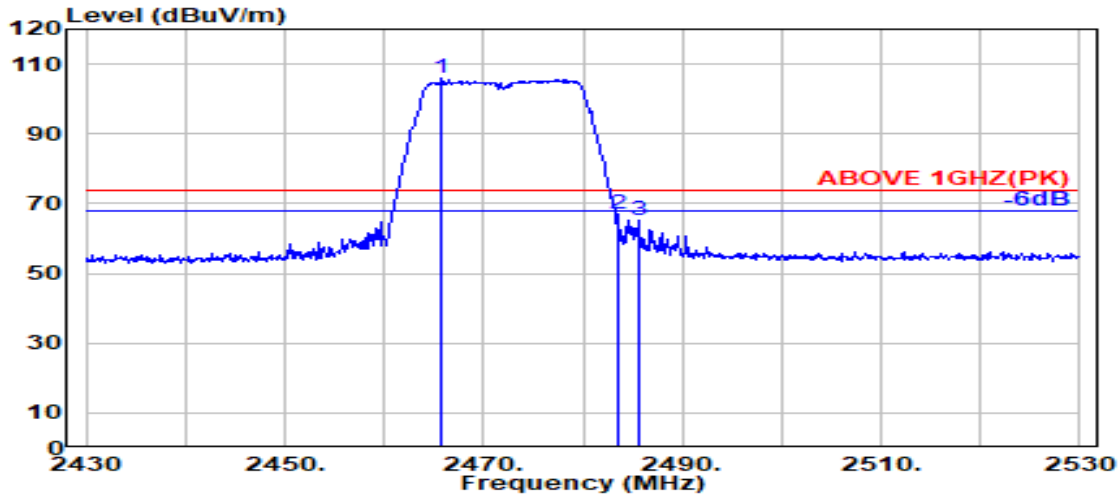

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.800	28.33	5.81	39.87	111.70	105.97	---	---	Peak
2483.500	28.37	5.83	39.87	72.58	66.90	74.00	7.10	Peak
2485.600	28.37	5.83	39.87	70.99	65.32	74.00	8.68	Peak

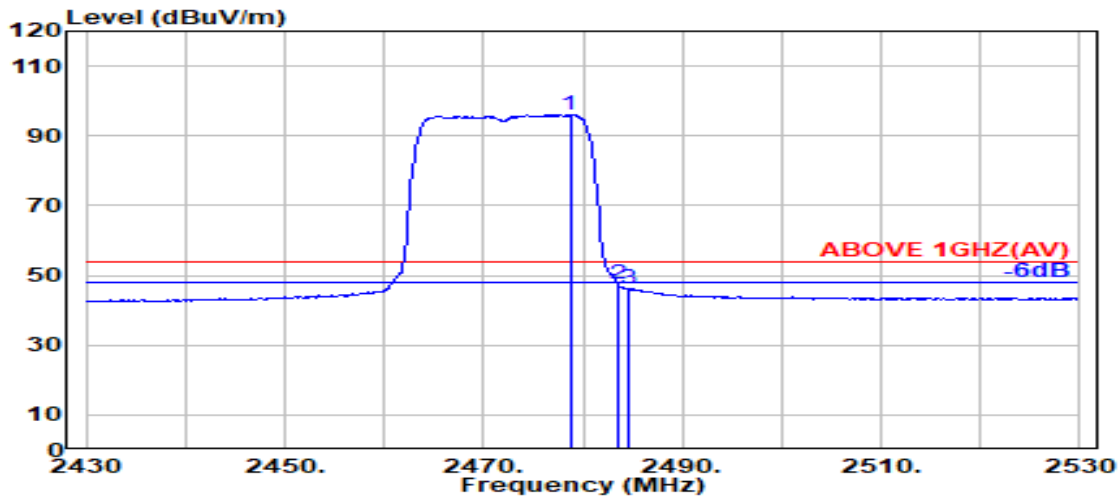


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.36	5.83	39.87	101.81	96.12	---	---	Average
2483.500	28.37	5.83	39.87	53.33	47.65	54.00	6.35	Average
2484.500	28.37	5.83	39.87	51.81	46.14	54.00	7.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

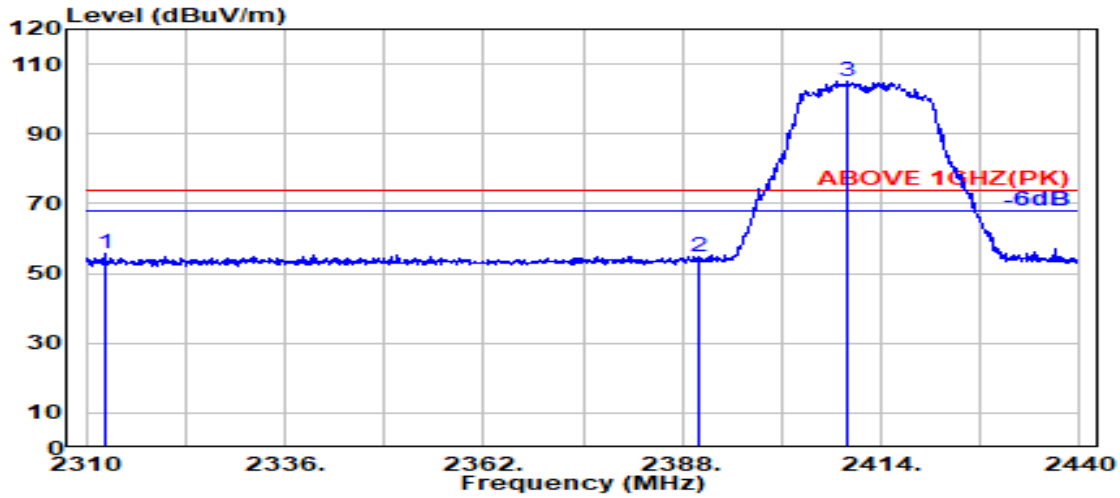

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2312.400	28.08	5.63	39.88	61.91	55.73	74.00	18.27	Peak
2390.000	28.14	5.72	39.88	60.79	54.77	74.00	19.23	Peak
@ 2409.600	28.14	5.74	39.88	111.07	105.07	---	---	Peak

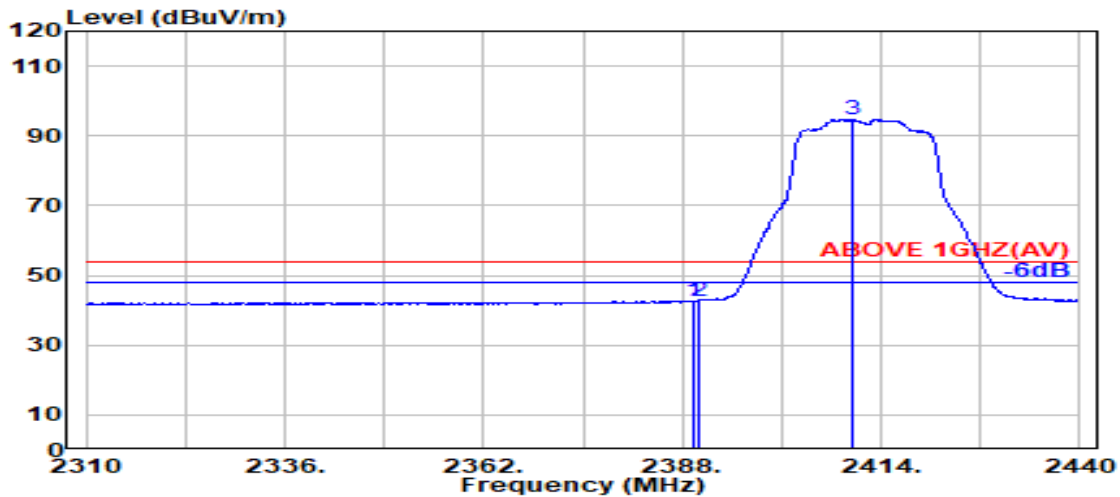


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	48.81	42.79	54.00	11.21	Average
2390.000	28.14	5.72	39.88	48.77	42.75	54.00	11.25	Average
@ 2410.400	28.14	5.75	39.88	100.61	94.62	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

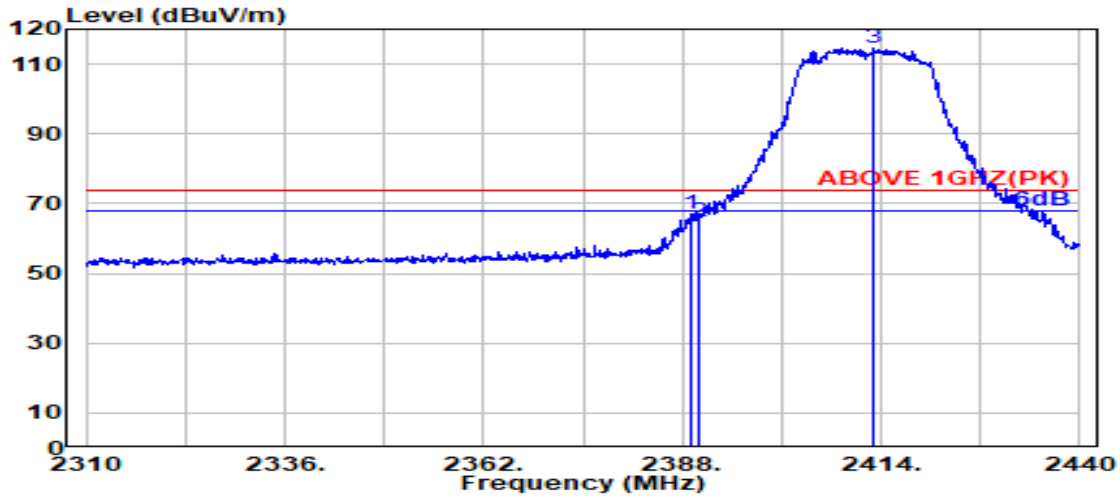

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	73.24	67.22	74.00	6.78	Peak
2390.000	28.14	5.72	39.88	70.84	64.82	74.00	9.18	Peak
@ 2413.100	28.15	5.75	39.88	120.62	114.64	---	---	Peak

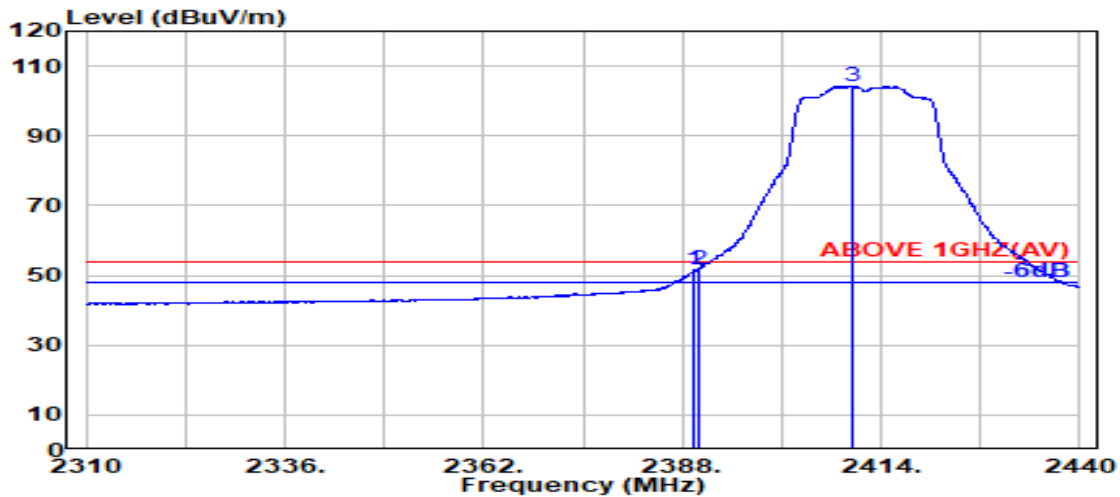


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	57.42	51.41	54.00	2.59	Average
2390.000	28.14	5.72	39.88	57.58	51.56	54.00	2.44	Average
@ 2410.100	28.14	5.74	39.88	110.19	104.20	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

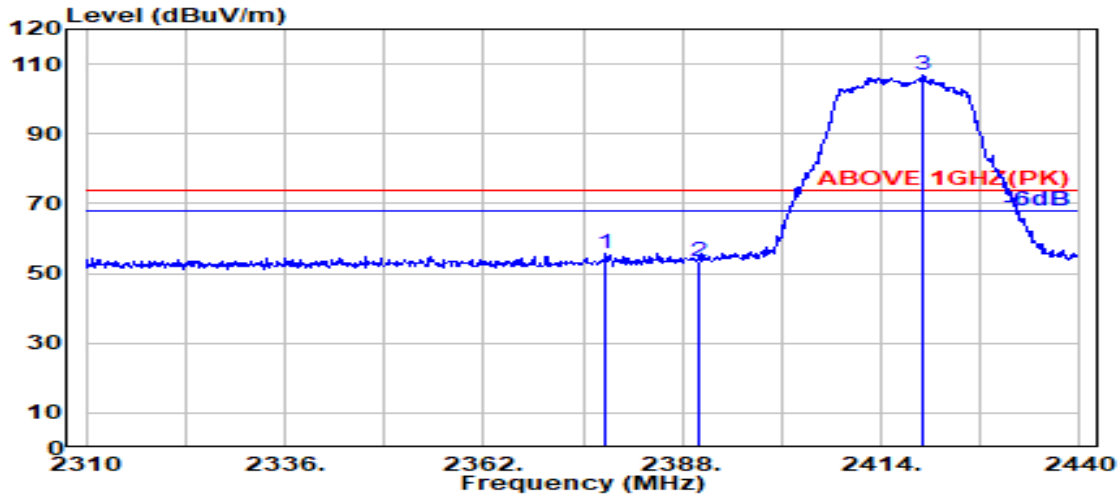

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.990	28.19	5.71	39.88	61.88	55.89	74.00	18.11	Peak
2390.000	28.14	5.72	39.88	59.62	53.60	74.00	20.40	Peak
@ 2419.460	28.18	5.76	39.88	112.95	107.01	---	---	Peak

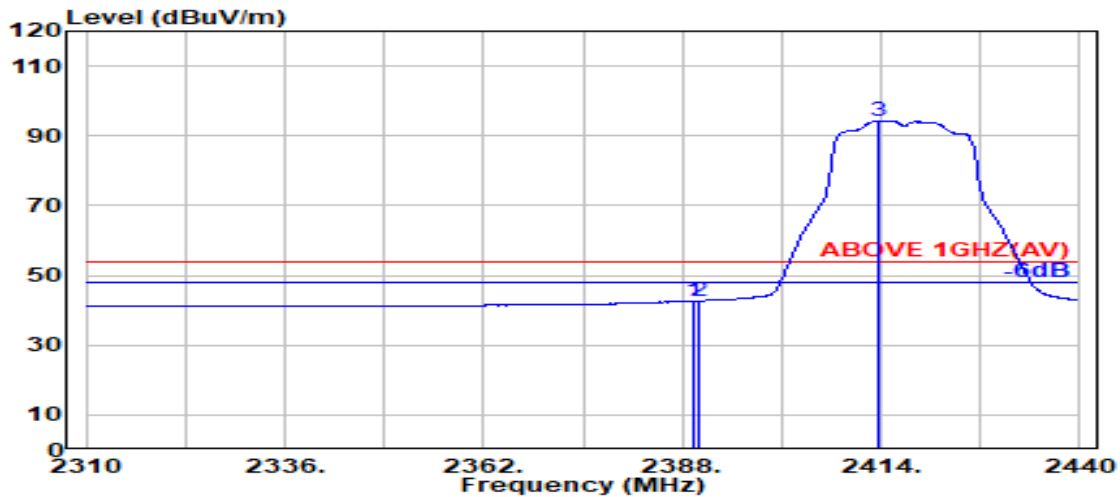


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.88	48.68	42.67	54.00	11.33	Average
2390.000	28.14	5.72	39.88	48.73	42.71	54.00	11.29	Average
@ 2413.610	28.15	5.75	39.88	100.19	94.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

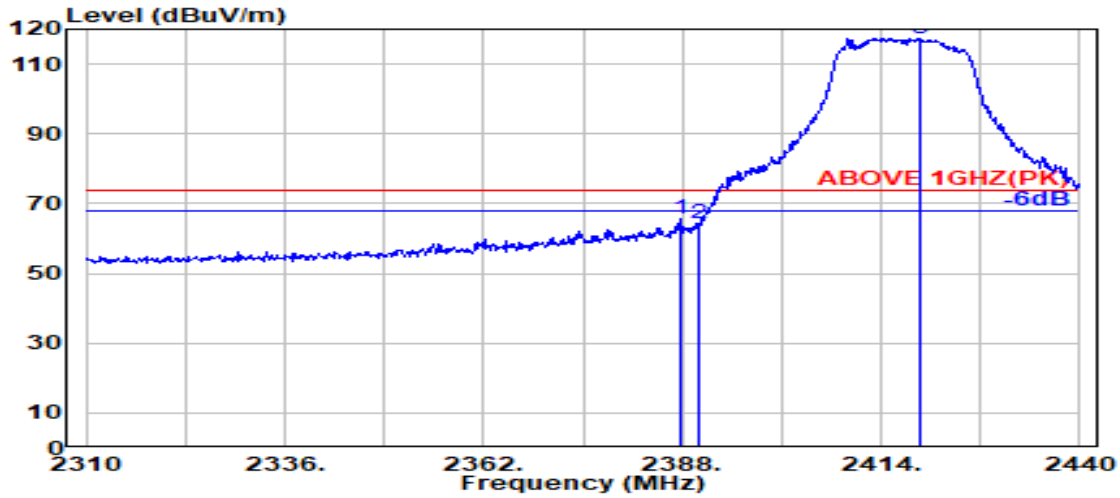

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.870	28.15	5.72	39.88	71.47	65.45	74.00	8.55	Peak
2390.000	28.14	5.72	39.88	70.14	64.12	74.00	9.88	Peak
@ 2419.200	28.18	5.76	39.88	123.27	117.32	---	---	Peak

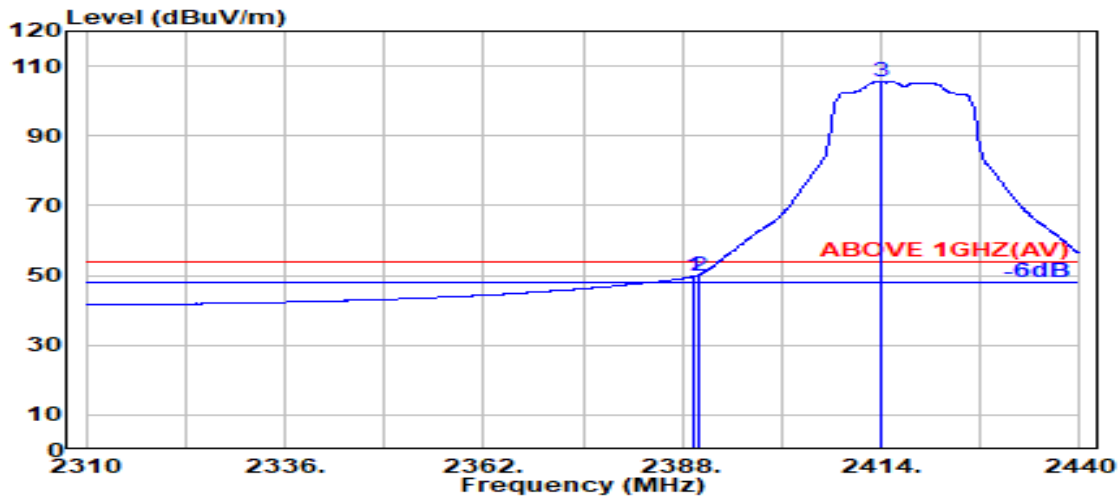


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.88	55.74	49.72	54.00	4.28	Average
2390.000	28.14	5.72	39.88	55.97	49.96	54.00	4.04	Average
@ 2414.000	28.16	5.75	39.88	111.32	105.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

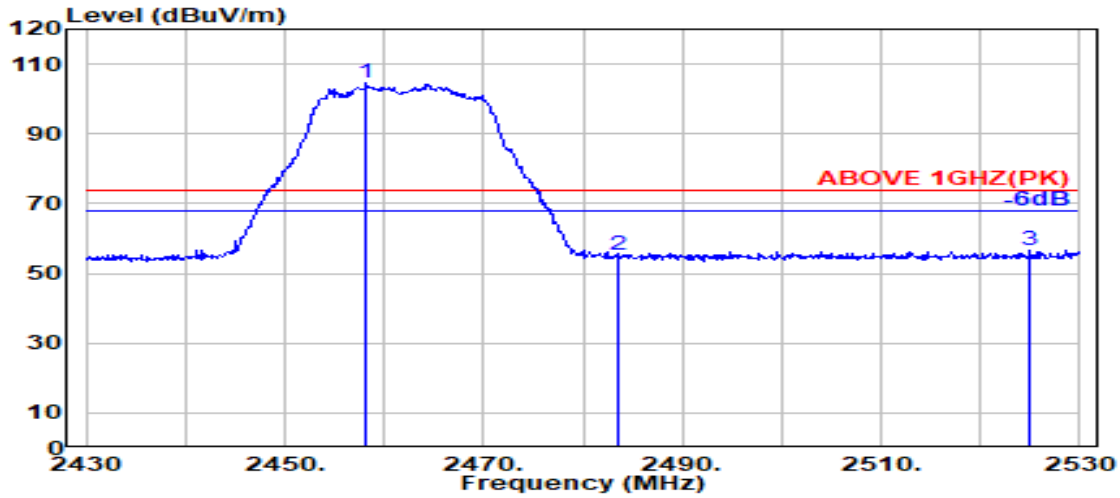

Antenna at HORIZONTAL Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.100	28.32	5.80	39.87	110.18	104.42	---	---	Peak
	2483.500	28.37	5.83	39.87	60.81	55.14	74.00	18.86	Peak
	2525.000	28.55	5.88	39.88	62.24	56.80	74.00	17.20	Peak

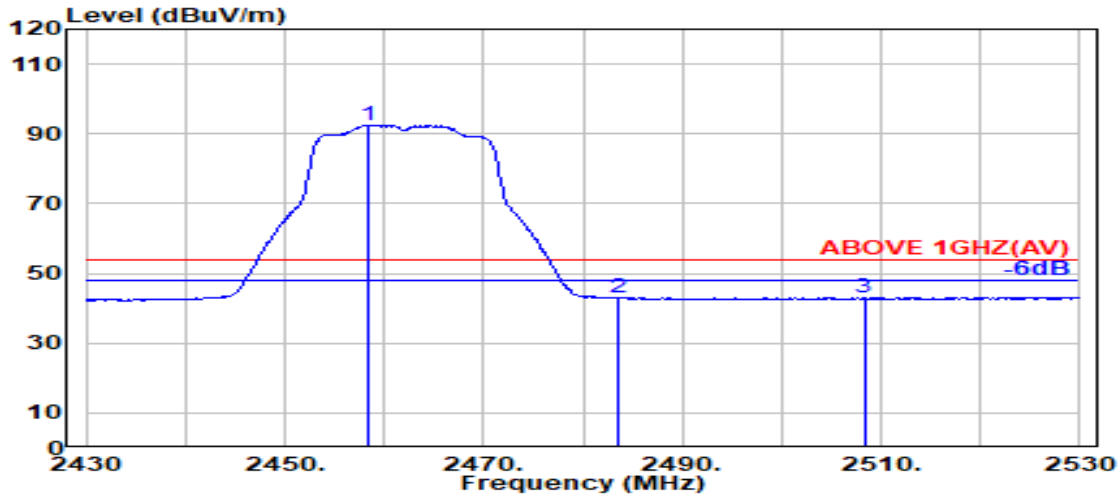


Antenna at HORIZONTAL Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.500	28.32	5.80	39.87	98.30	92.54	---	---	Average
	2483.500	28.37	5.83	39.87	48.48	42.80	54.00	11.20	Average
	2508.300	28.45	5.86	39.87	48.71	43.15	54.00	10.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

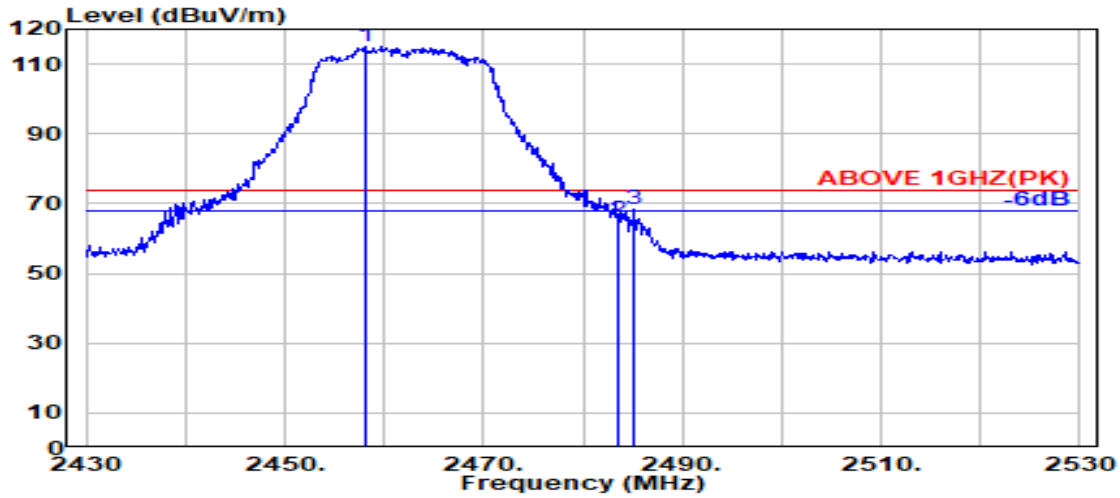

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.100	28.32	5.80	39.87	120.63	114.88	---	---	Peak
2483.500	28.37	5.83	39.87	70.81	65.13	74.00	8.87	Peak
2485.200	28.37	5.83	39.87	74.06	68.39	74.00	5.61	Peak

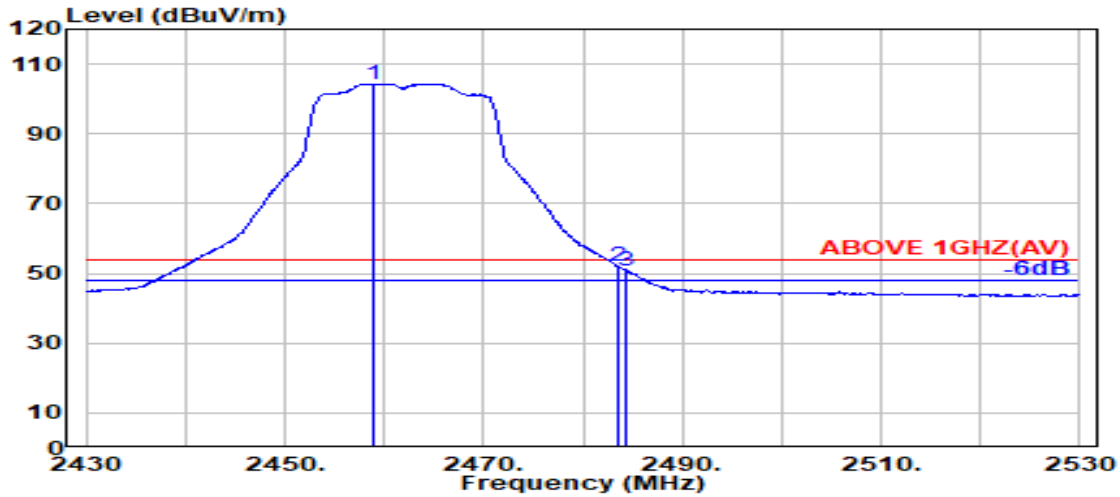


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	28.32	5.80	39.87	110.12	104.37	---	---	Average
2483.500	28.37	5.83	39.87	57.85	52.17	54.00	1.83	Average
2484.400	28.37	5.83	39.87	56.40	50.73	54.00	3.27	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

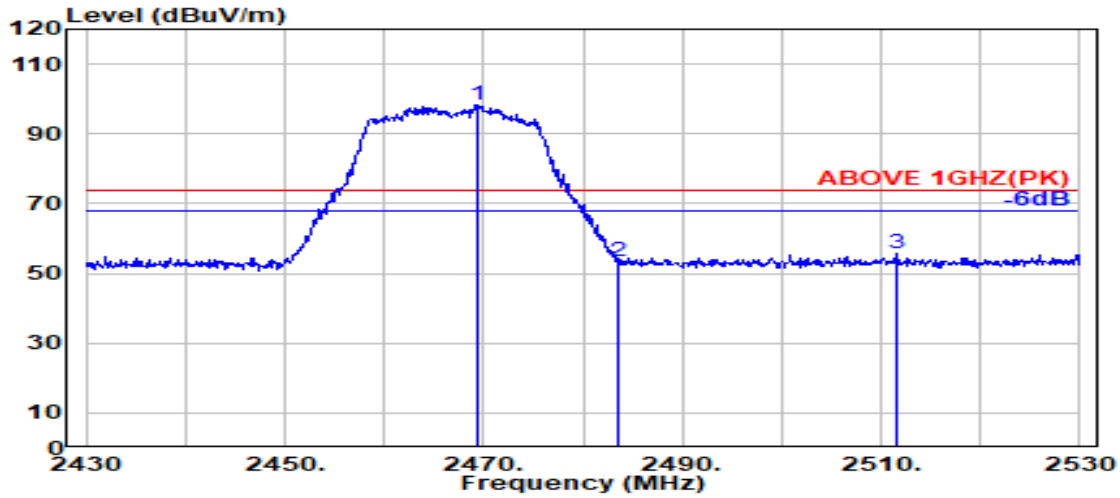

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.34	5.81	39.87	104.15	98.43	---	---	Peak
2483.500	28.37	5.83	39.87	58.92	53.25	74.00	20.75	Peak
2511.500	28.47	5.86	39.87	61.25	55.71	74.00	18.29	Peak

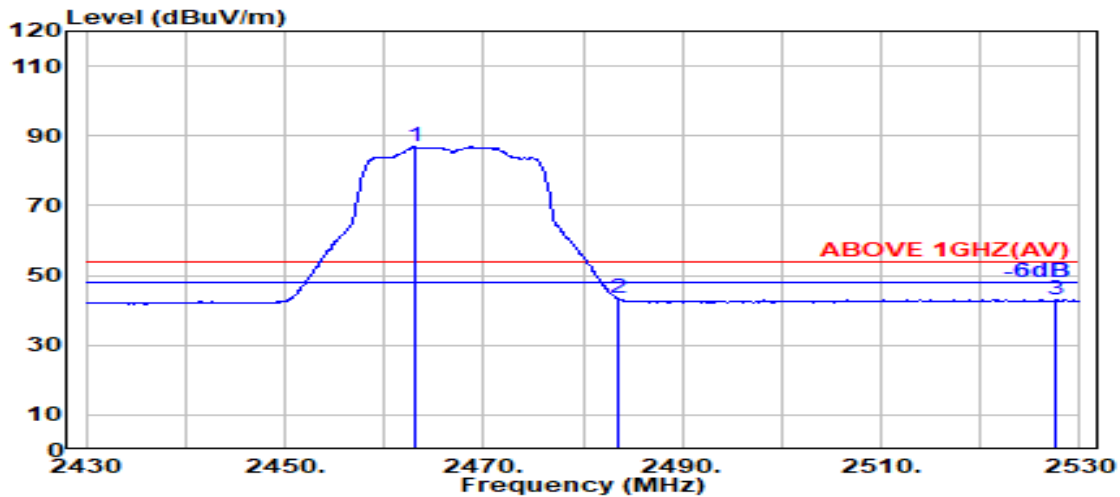


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	28.33	5.81	39.87	92.60	86.86	---	---	Average
2483.500	28.37	5.83	39.87	49.07	43.40	54.00	10.60	Average
2527.600	28.57	5.88	39.88	48.61	43.18	54.00	10.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

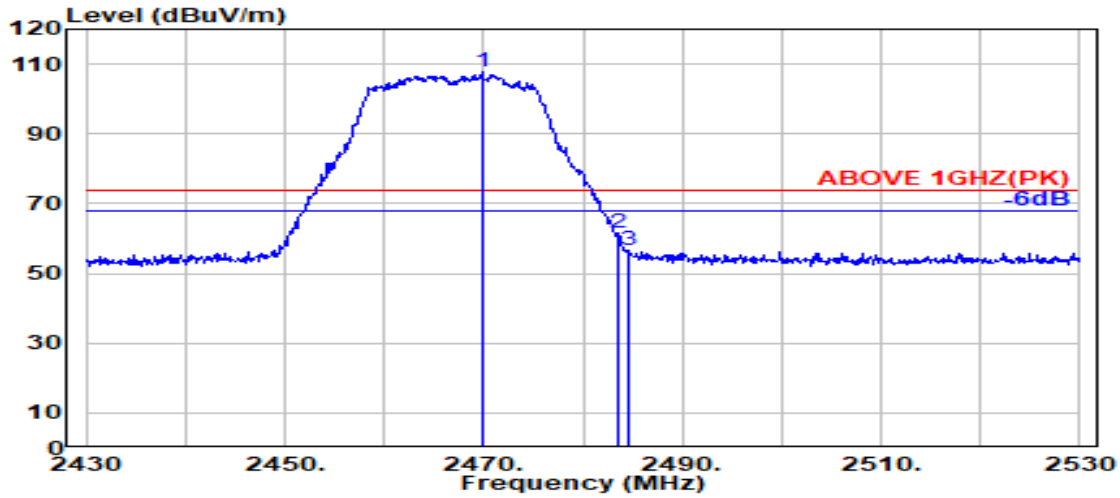

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.800	28.34	5.82	39.87	113.32	107.60	---	---	Peak
2483.500	28.37	5.83	39.87	67.33	61.66	74.00	12.34	Peak
2484.500	28.37	5.83	39.87	62.37	56.70	74.00	17.30	Peak

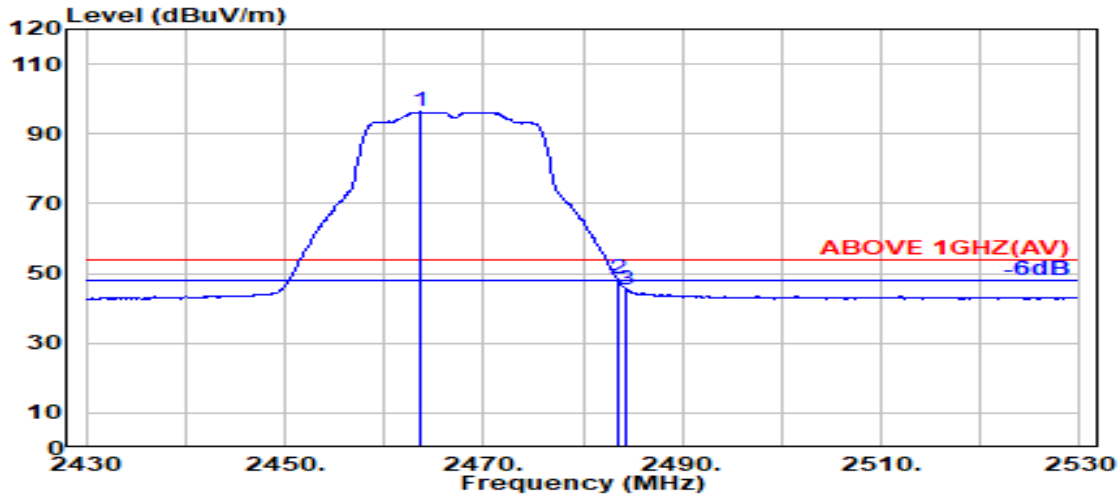


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.600	28.33	5.81	39.87	101.99	96.25	---	---	Average
2483.500	28.37	5.83	39.87	54.24	48.57	54.00	5.43	Average
2484.400	28.37	5.83	39.87	51.13	45.46	54.00	8.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

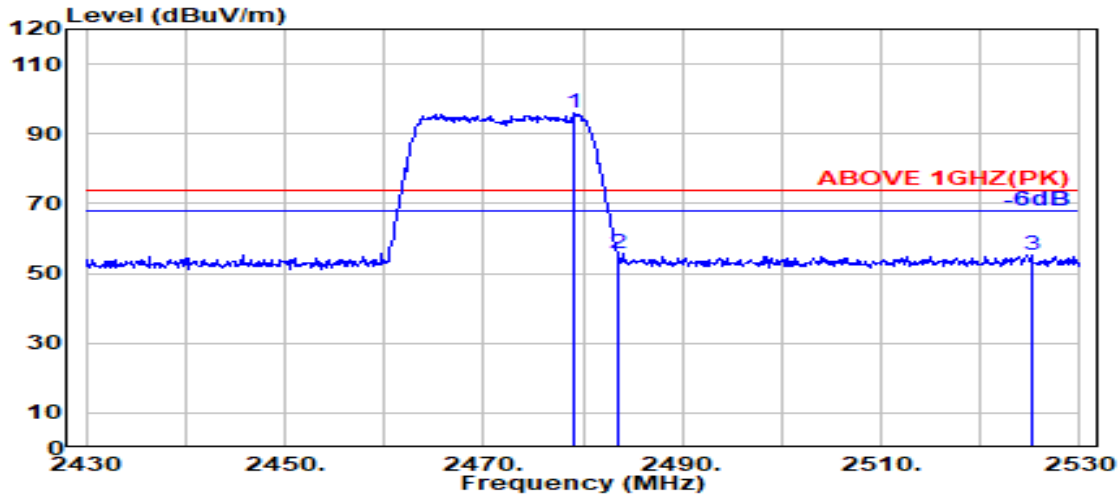

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.36	5.83	39.87	101.57	95.88	---	---	Peak
2483.500	28.37	5.83	39.87	61.40	55.73	74.00	18.27	Peak
2525.200	28.55	5.88	39.88	60.76	55.31	74.00	18.69	Peak

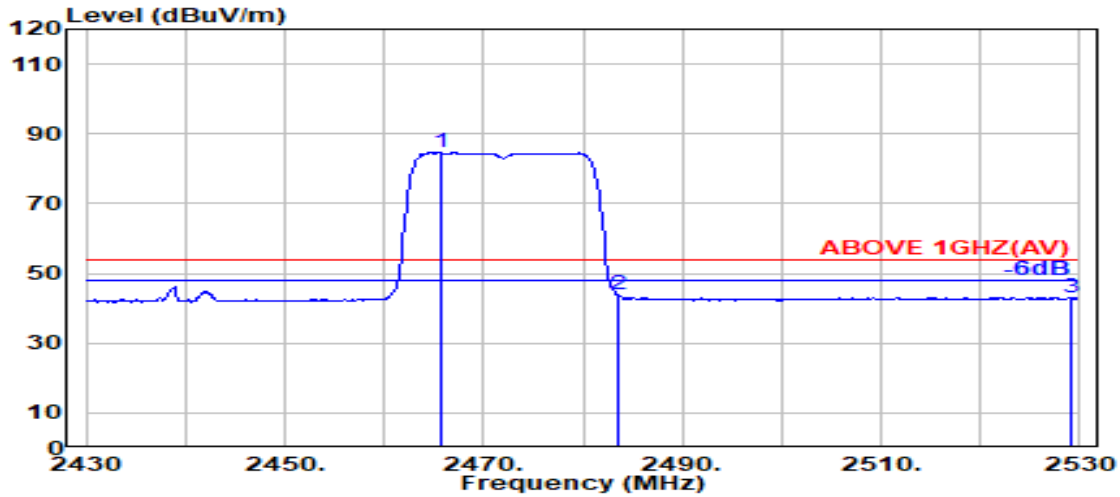


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.33	5.81	39.87	90.37	84.64	---	---	Average
2483.500	28.37	5.83	39.87	49.44	43.76	54.00	10.24	Average
2529.000	28.57	5.89	39.88	48.53	43.11	54.00	10.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

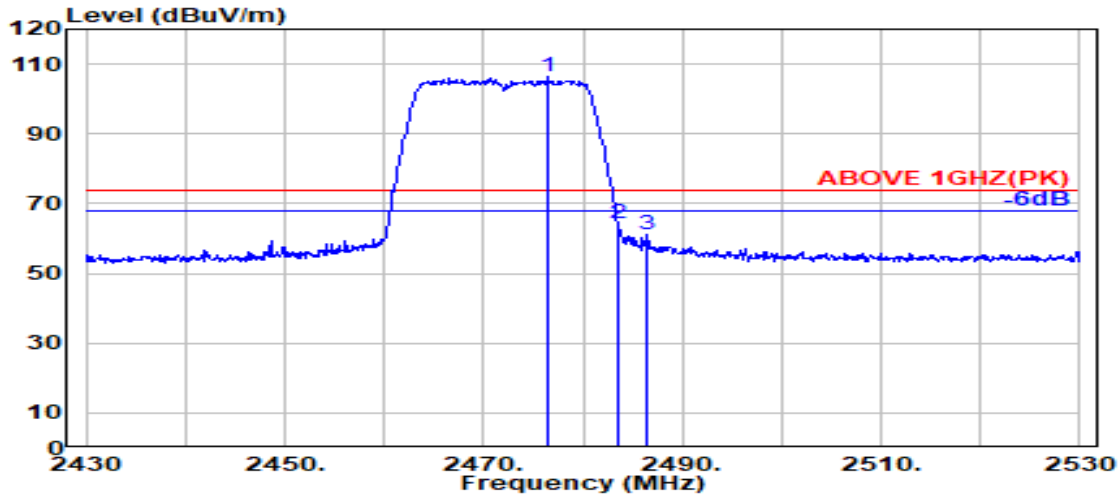

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.35	5.82	39.87	112.05	106.35	---	---	Peak
2483.500	28.37	5.83	39.87	70.18	64.51	74.00	9.49	Peak
2486.300	28.37	5.83	39.87	66.92	61.25	74.00	12.75	Peak

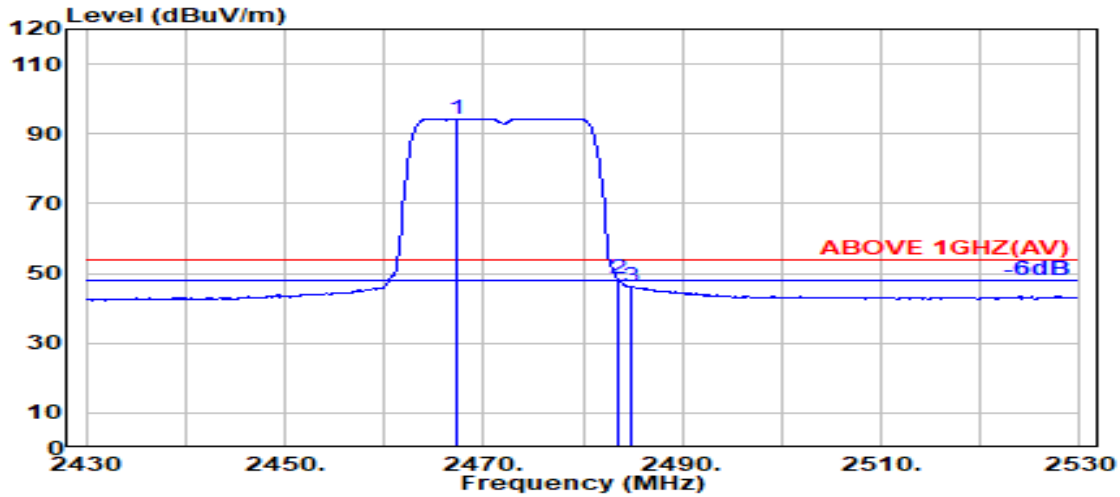


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.200	28.33	5.81	39.87	100.14	94.41	---	---	Average
2483.500	28.37	5.83	39.87	54.23	48.56	54.00	5.44	Average
2484.800	28.37	5.83	39.87	52.05	46.38	54.00	7.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

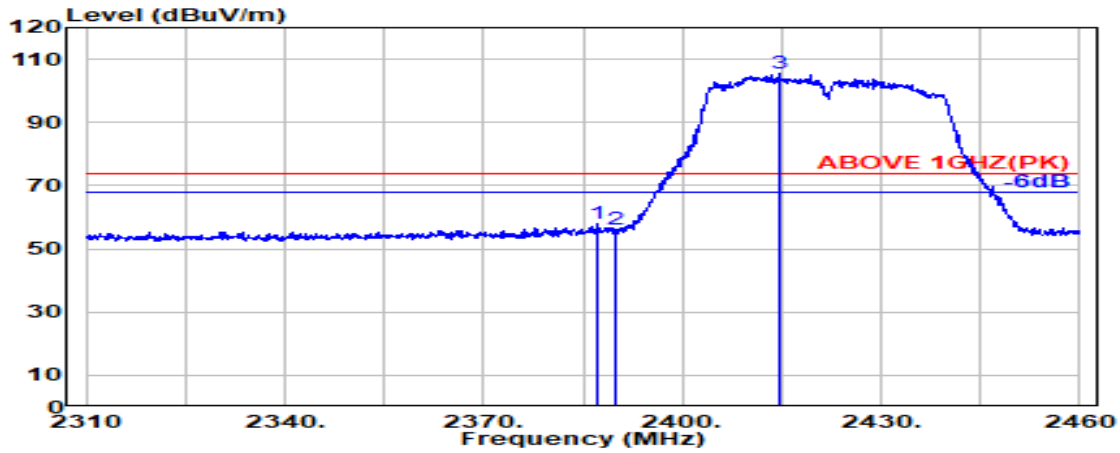

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	28.15	5.72	39.88	64.13	58.12	74.00	15.88	Peak
2390.000	28.14	5.72	39.88	62.34	56.32	74.00	17.68	Peak
@ 2414.500	28.16	5.75	39.88	111.52	105.55	---	---	Peak

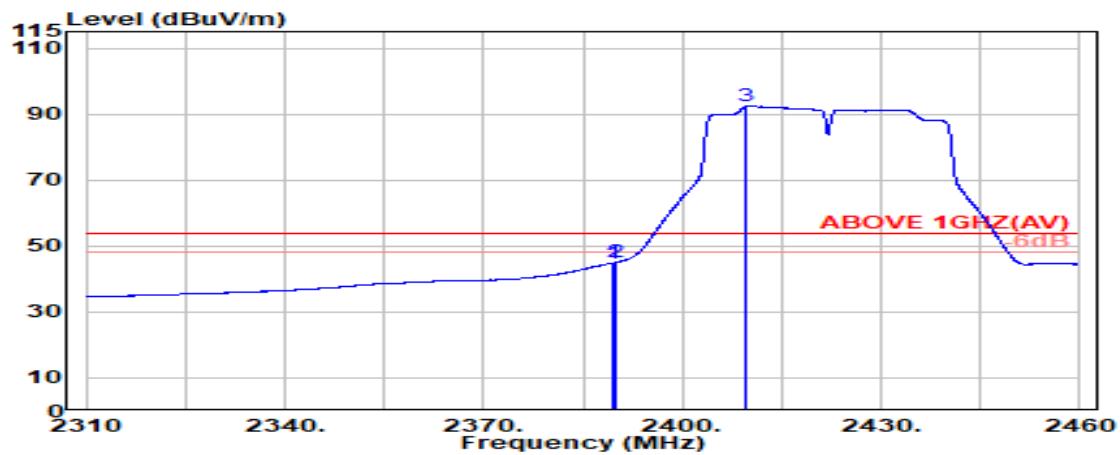


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	50.89	44.87	54.00	9.13	Peak
2389.800	28.14	5.72	39.88	50.99	44.97	54.00	9.03	Peak
@ 2409.742	28.14	5.74	39.88	98.34	92.35	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

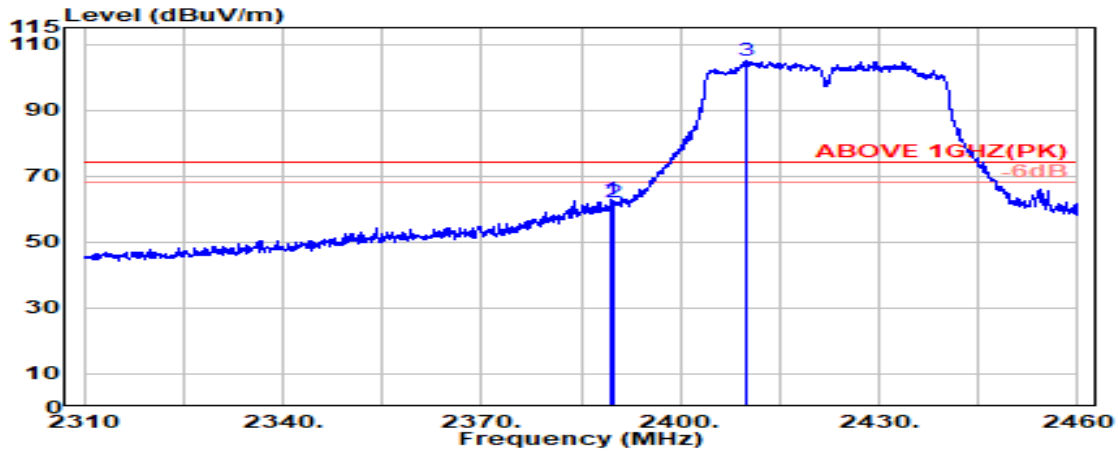

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	68.83	62.82	74.00	11.18	Peak
2389.800	28.14	5.72	39.88	68.02	62.01	74.00	11.99	Peak
@ 2410.052	28.14	5.74	39.88	110.90	104.91	---	---	Peak

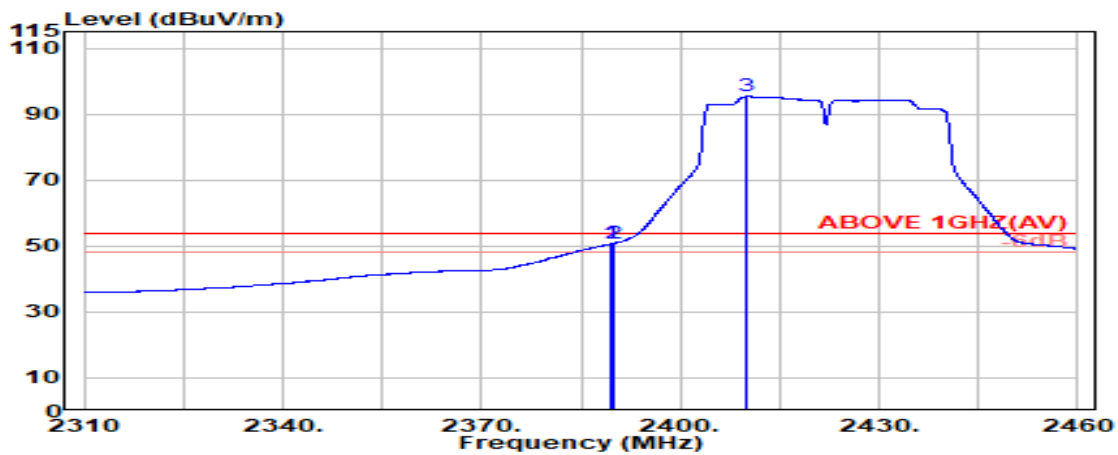


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	56.76	50.74	54.00	3.26	Average
2389.800	28.14	5.72	39.88	56.81	50.79	54.00	3.21	Average
@ 2410.129	28.14	5.74	39.88	101.31	95.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

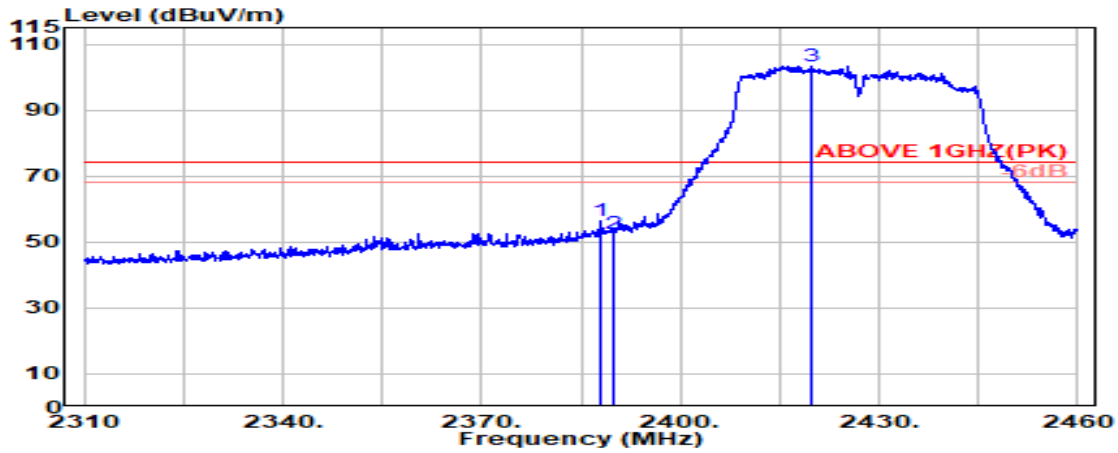

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.861	28.15	5.72	39.88	62.40	56.39	74.00	17.61	Peak
2389.800	28.14	5.72	39.88	58.63	52.61	74.00	21.39	Peak
@ 2419.871	28.18	5.76	39.88	109.31	103.37	---	---	Peak

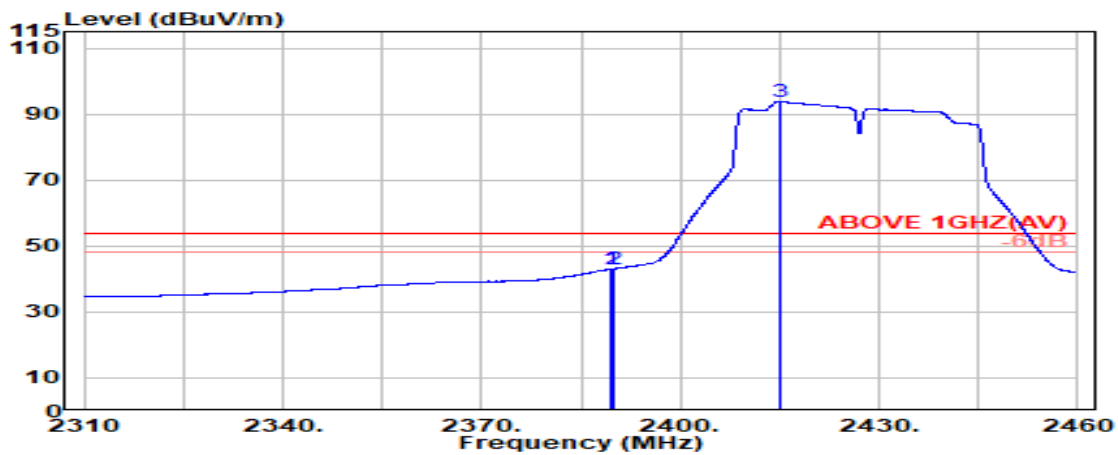


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	49.02	43.01	54.00	10.99	Peak
2389.800	28.14	5.72	39.88	49.02	43.00	54.00	11.00	Peak
@ 2414.923	28.16	5.75	39.88	99.70	93.73	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

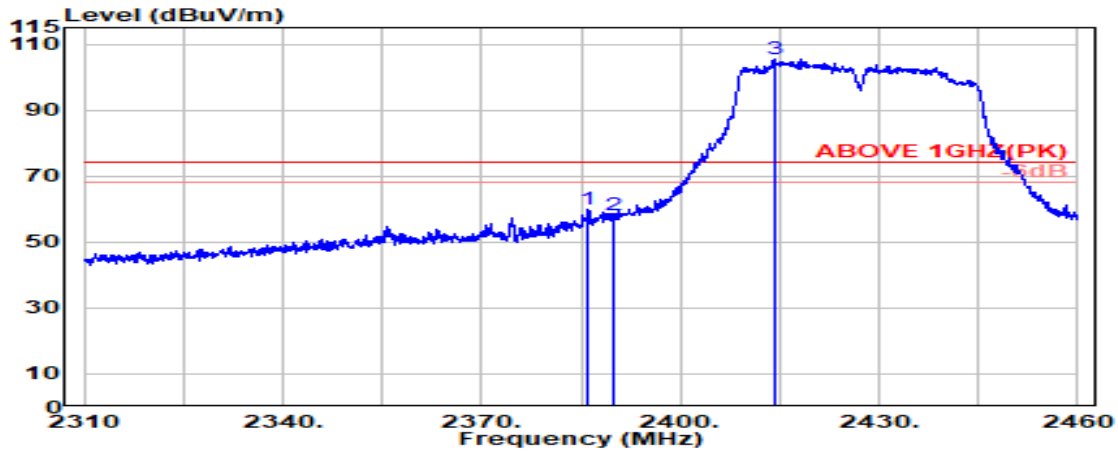

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.160	28.15	5.72	39.88	65.96	59.95	74.00	14.05	Peak
2389.800	28.14	5.72	39.88	64.14	58.12	74.00	15.88	Peak
@ 2414.227	28.16	5.75	39.88	111.56	105.59	---	---	Peak

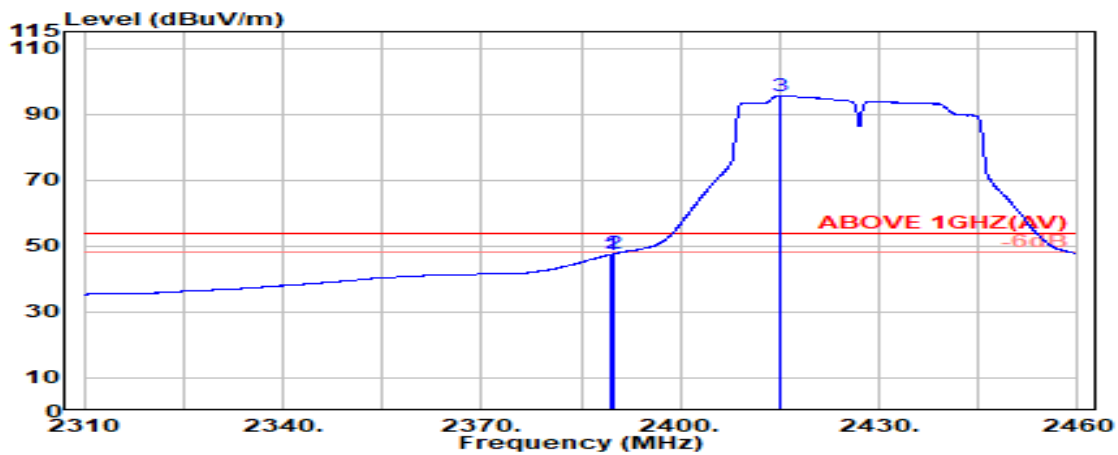


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	53.49	47.48	54.00	6.52	Average
2389.800	28.14	5.72	39.88	53.56	47.55	54.00	6.45	Average
@ 2414.923	28.16	5.75	39.88	101.62	95.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

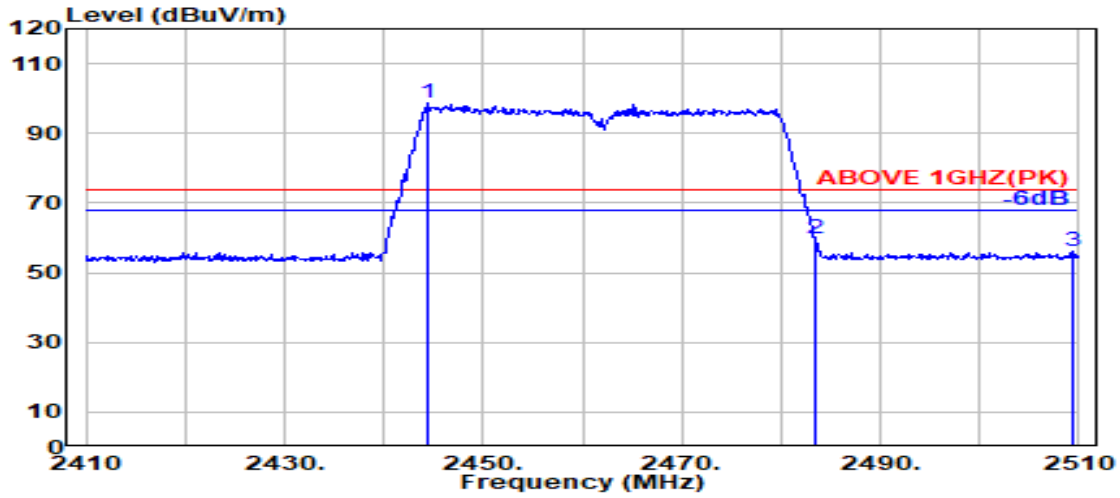

Antenna at HORIZONTAL Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2444.300	28.28	5.79	39.87	104.33	98.51	---	---	Peak
	2483.500	28.37	5.83	39.87	65.42	59.74	74.00	14.26	Peak
	2509.400	28.46	5.86	39.87	61.77	56.21	74.00	17.79	Peak

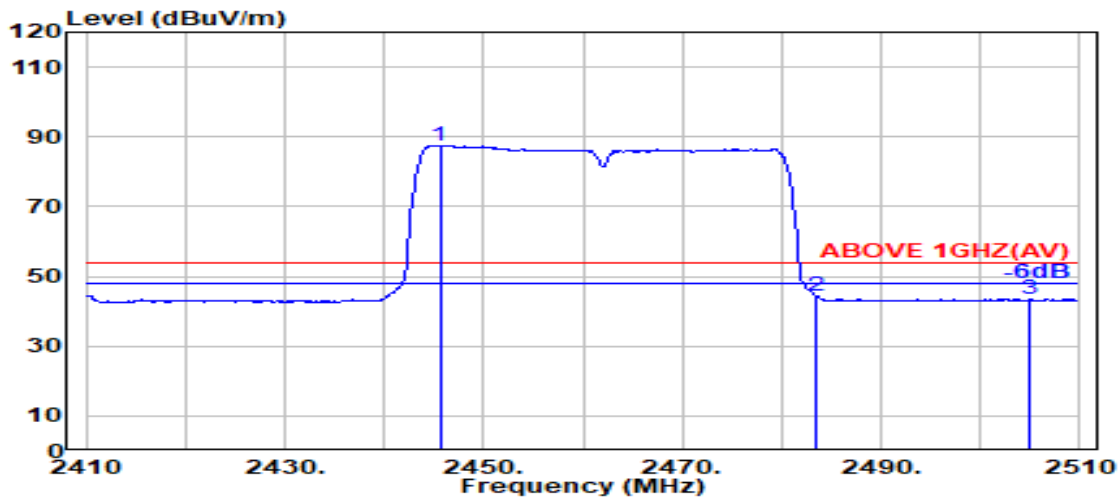


Antenna at HORIZONTAL Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2445.600	28.28	5.79	39.87	93.36	87.56	---	---	Average
	2483.500	28.37	5.83	39.87	50.04	44.37	54.00	9.63	Average
	2505.000	28.43	5.86	39.87	49.10	43.51	54.00	10.49	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

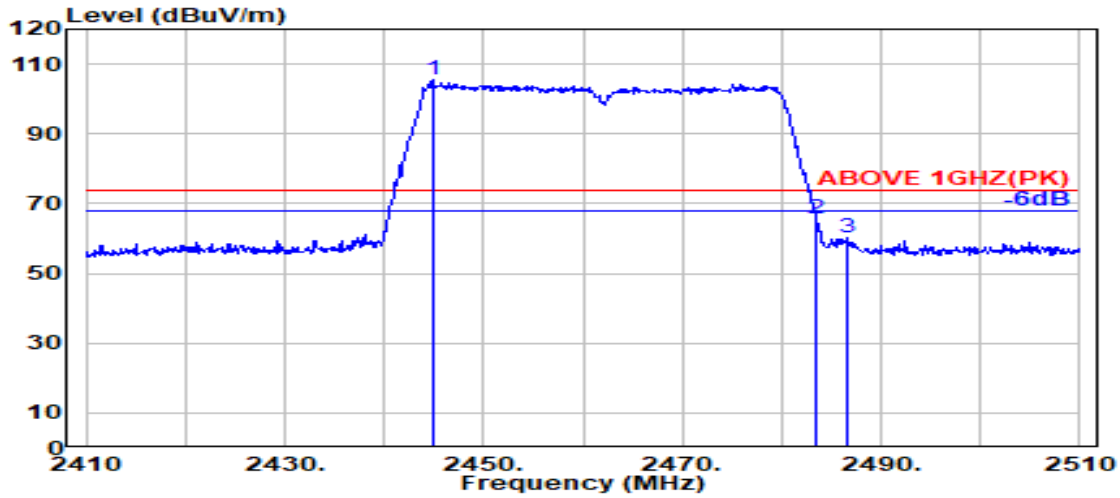

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.900	28.28	5.79	39.87	111.37	105.56	---	---	Peak
2483.500	28.37	5.83	39.87	71.44	65.77	74.00	8.23	Peak
2486.700	28.37	5.83	39.87	65.74	60.08	74.00	13.92	Peak

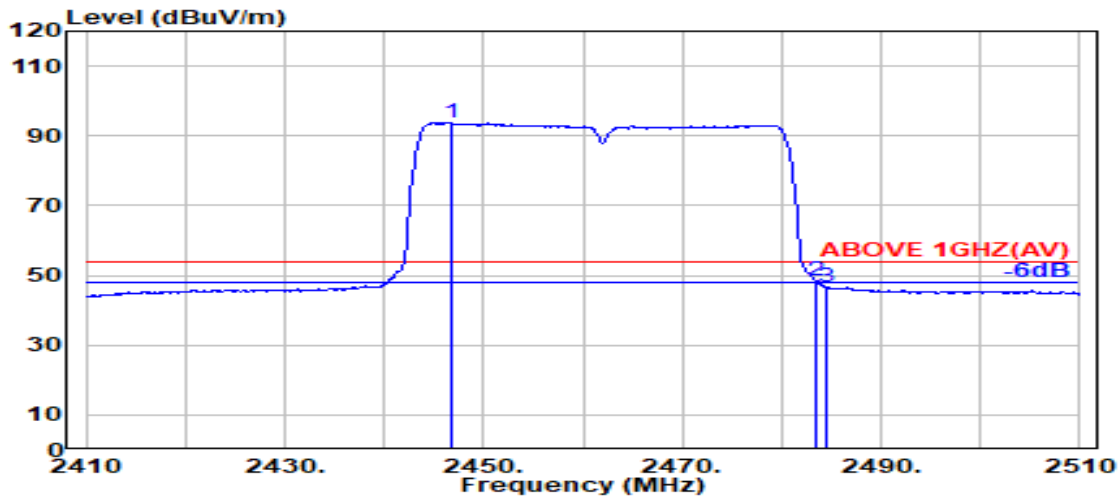


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.700	28.29	5.79	39.87	99.51	93.71	---	---	Average
2483.500	28.37	5.83	39.87	54.28	48.61	54.00	5.39	Average
2484.400	28.37	5.83	39.87	52.46	46.79	54.00	7.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

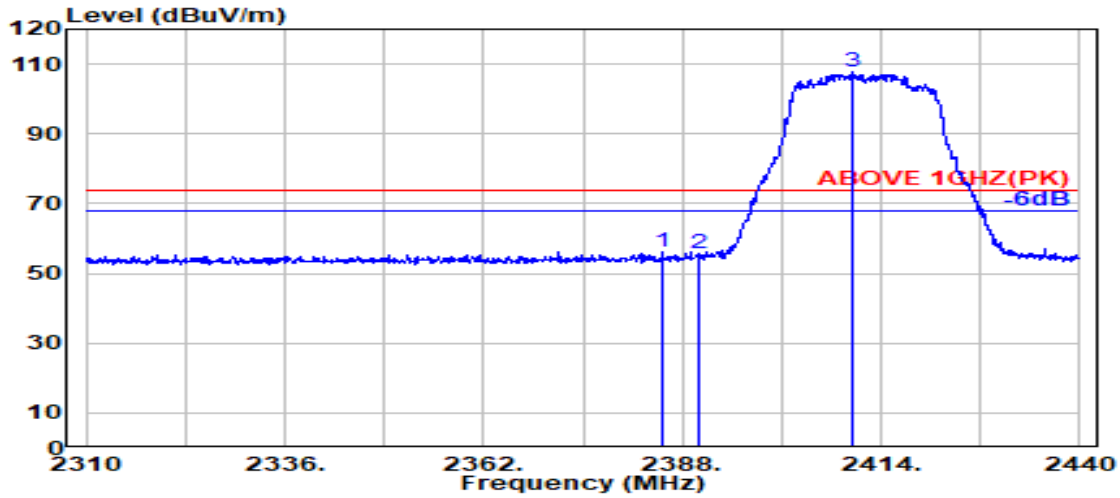

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.400	28.16	5.72	39.88	62.23	56.23	74.00	17.77	Peak
2390.000	28.14	5.72	39.88	61.86	55.85	74.00	18.15	Peak
@ 2410.300	28.14	5.75	39.88	113.74	107.75	---	---	Peak

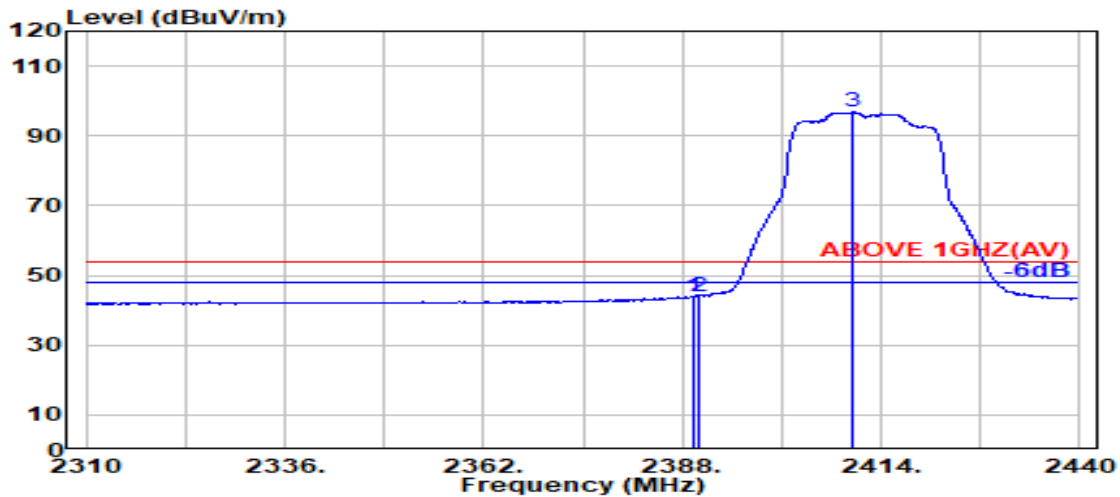


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	50.01	43.99	54.00	10.01	Average
2390.000	28.14	5.72	39.88	50.03	44.01	54.00	9.99	Average
@ 2410.200	28.14	5.75	39.88	102.89	96.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

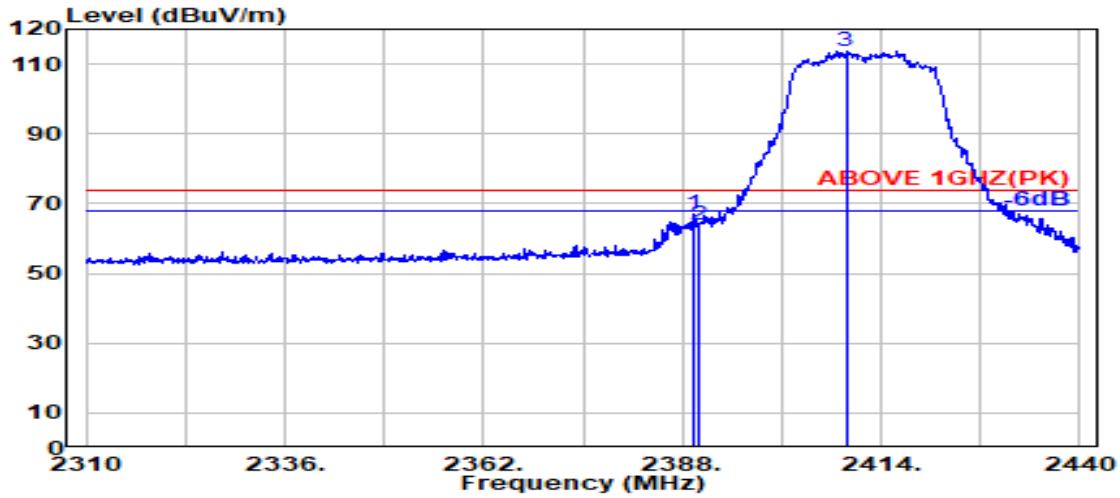

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	73.12	67.11	74.00	6.89	Peak
2390.000	28.14	5.72	39.88	69.84	63.82	74.00	10.18	Peak
@ 2409.400	28.14	5.74	39.88	119.51	113.51	---	---	Peak

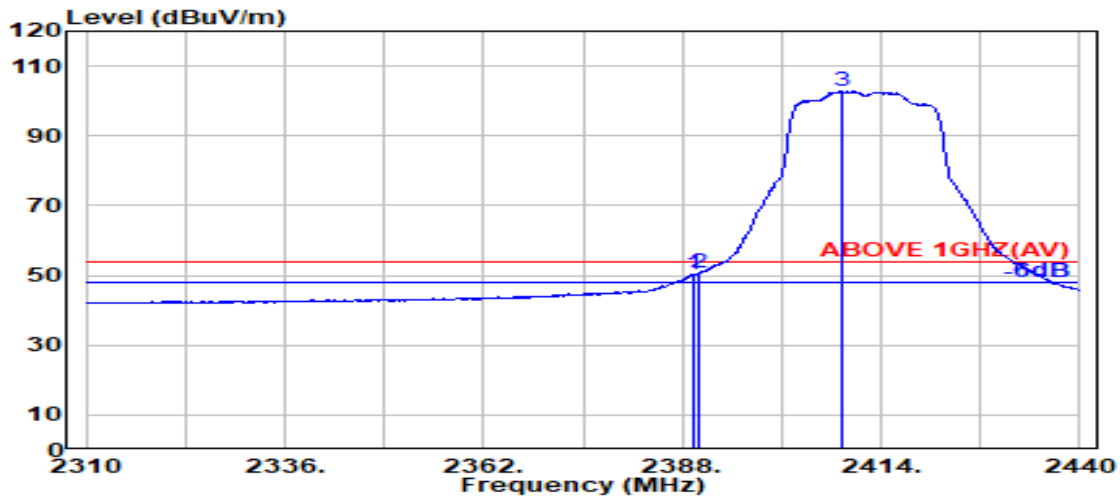


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	56.15	50.13	54.00	3.87	Average
2390.000	28.14	5.72	39.88	56.74	50.73	54.00	3.27	Average
@ 2408.800	28.14	5.74	39.88	108.72	102.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

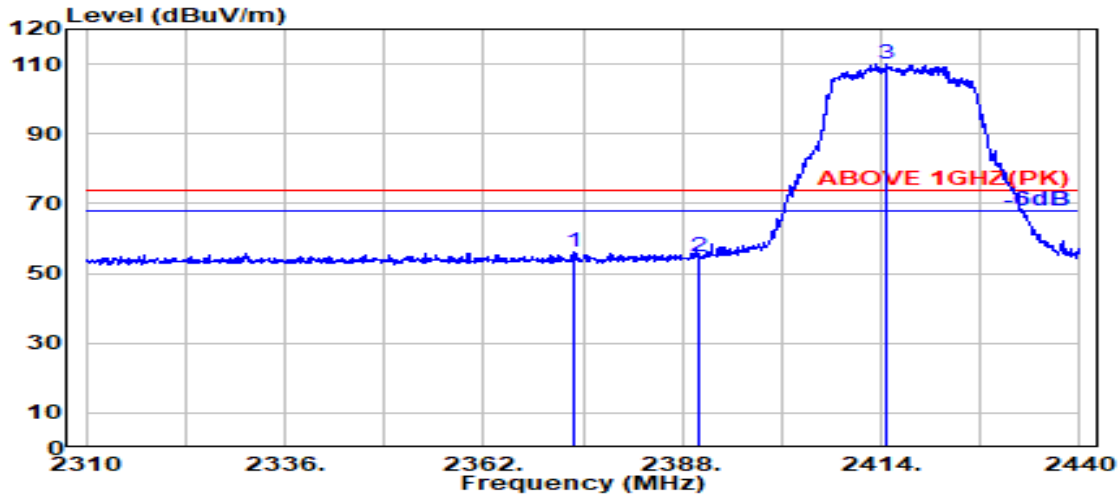

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.900	28.20	5.70	39.88	61.97	55.99	74.00	18.01	Peak
2390.000	28.14	5.72	39.88	60.86	54.84	74.00	19.16	Peak
@ 2414.700	28.16	5.75	39.88	116.19	110.22	---	---	Peak

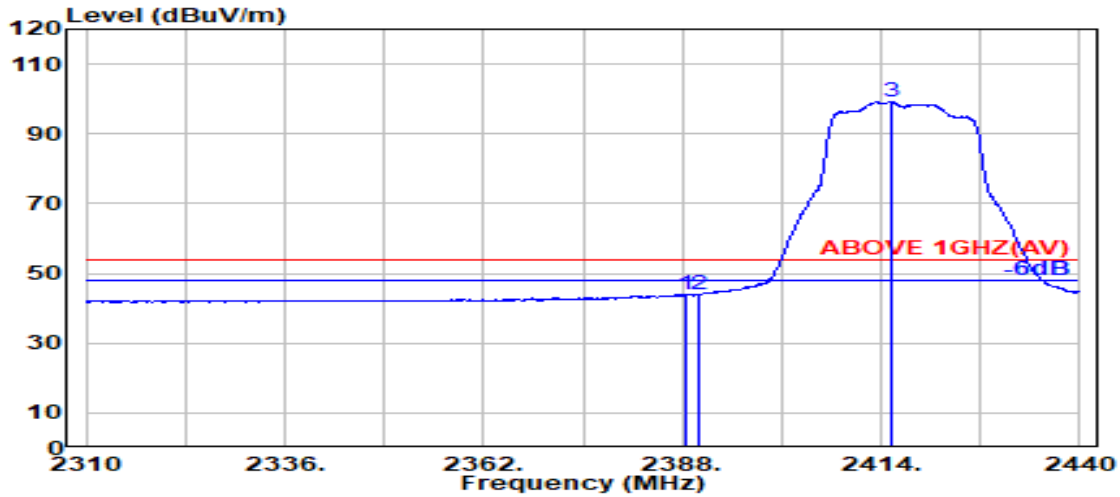


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.15	5.72	39.88	50.16	44.14	54.00	9.86	Average
2390.000	28.14	5.72	39.88	49.97	43.96	54.00	10.04	Average
@ 2415.500	28.16	5.75	39.88	105.13	99.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

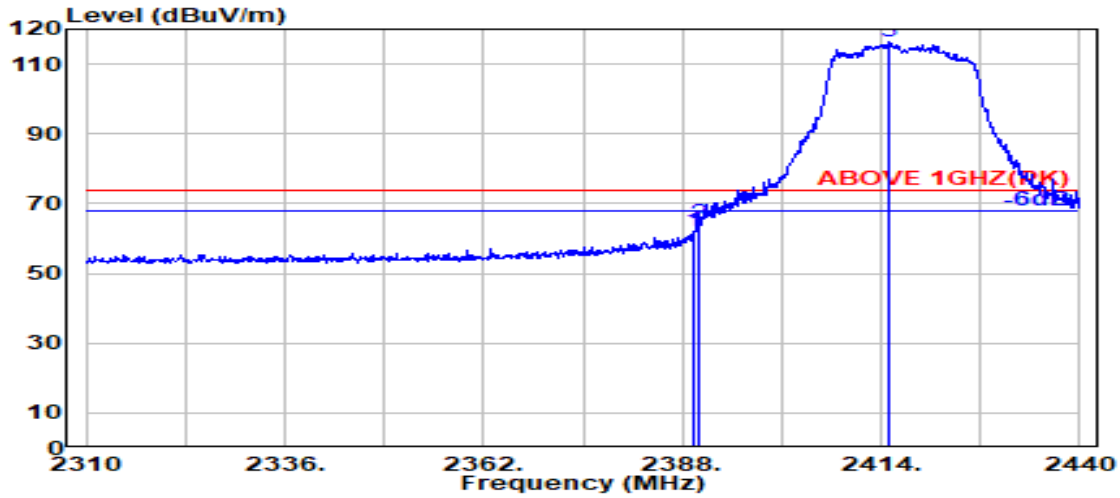

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	68.09	62.07	74.00	11.93	Peak
2390.000	28.14	5.72	39.88	70.34	64.32	74.00	9.68	Peak
@ 2415.000	28.16	5.75	39.88	122.50	116.53	---	---	Peak

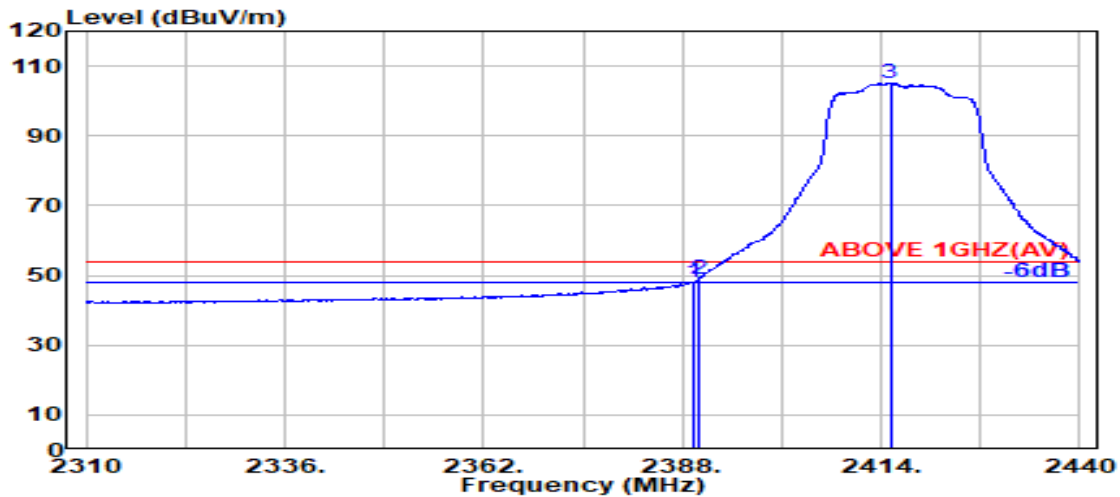


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	54.24	48.22	54.00	5.78	Average
2390.000	28.14	5.72	39.88	54.77	48.75	54.00	5.25	Average
@ 2415.200	28.16	5.75	39.88	111.11	105.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

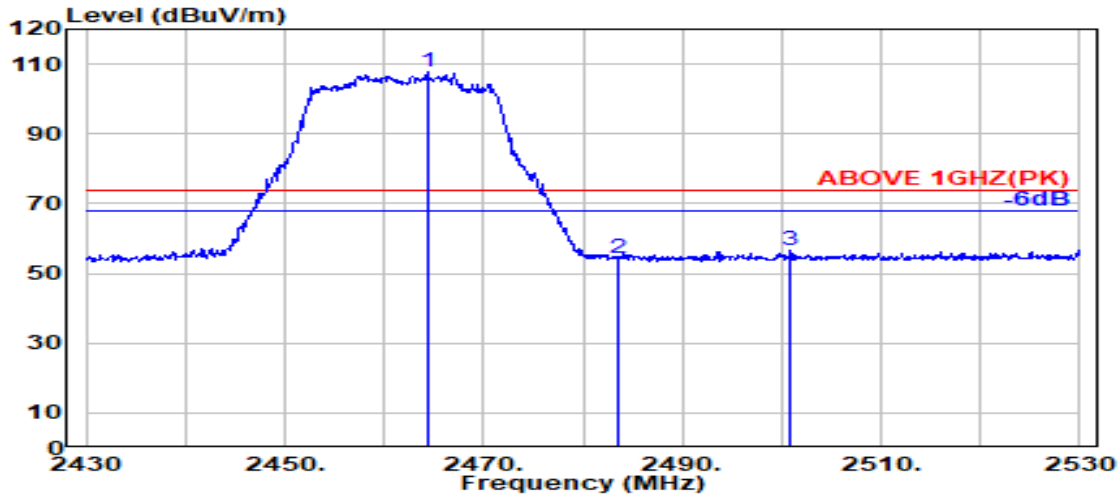

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	28.33	5.81	39.87	113.44	107.71	---	---	Peak
2483.500	28.37	5.83	39.87	60.15	54.48	74.00	19.52	Peak
2500.900	28.41	5.85	39.87	62.05	56.44	74.00	17.56	Peak

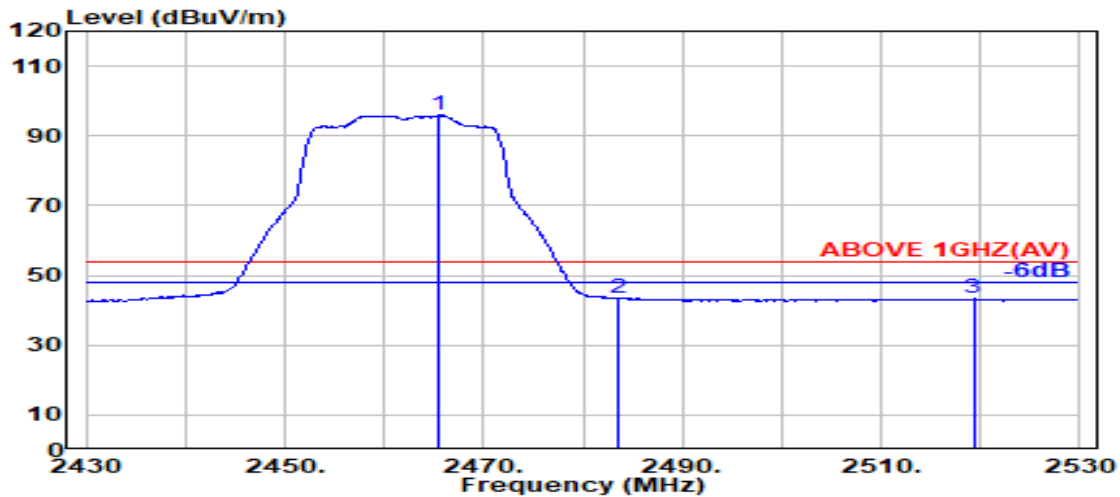


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.33	5.81	39.87	101.74	96.00	---	---	Average
2483.500	28.37	5.83	39.87	49.14	43.46	54.00	10.54	Average
2519.300	28.52	5.87	39.88	48.85	43.36	54.00	10.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

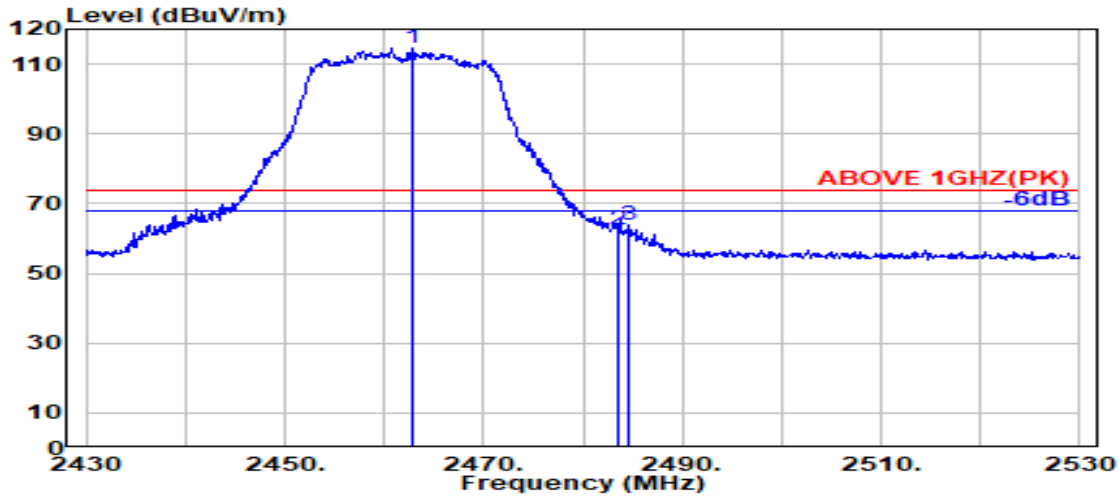

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.900	28.33	5.81	39.87	120.09	114.35	---	---	Peak
2483.500	28.37	5.83	39.87	68.07	62.39	74.00	11.61	Peak
2484.600	28.37	5.83	39.87	69.31	63.64	74.00	10.36	Peak

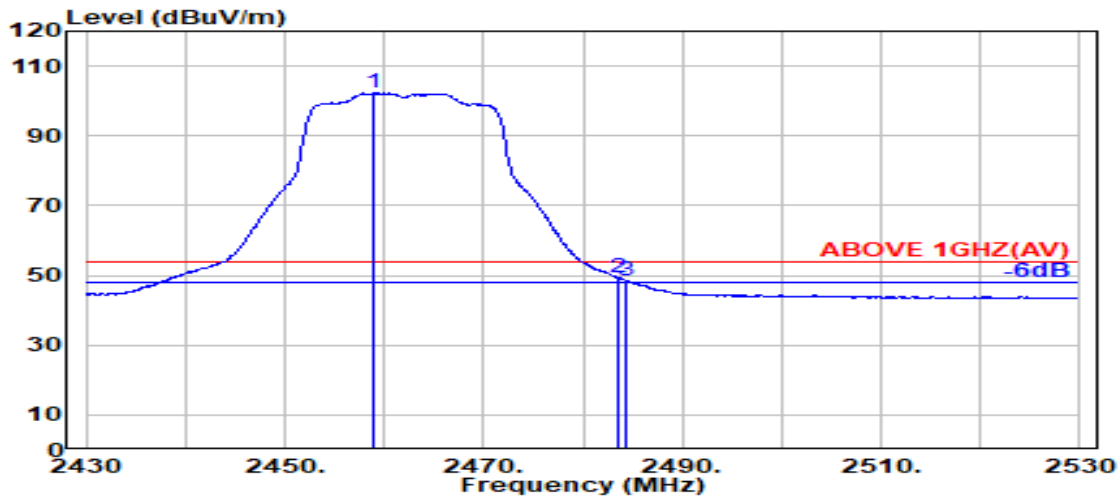


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.900	28.32	5.80	39.87	108.00	102.24	---	---	Average
2483.500	28.37	5.83	39.87	55.17	49.50	54.00	4.50	Average
2484.400	28.37	5.83	39.87	54.18	48.51	54.00	5.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

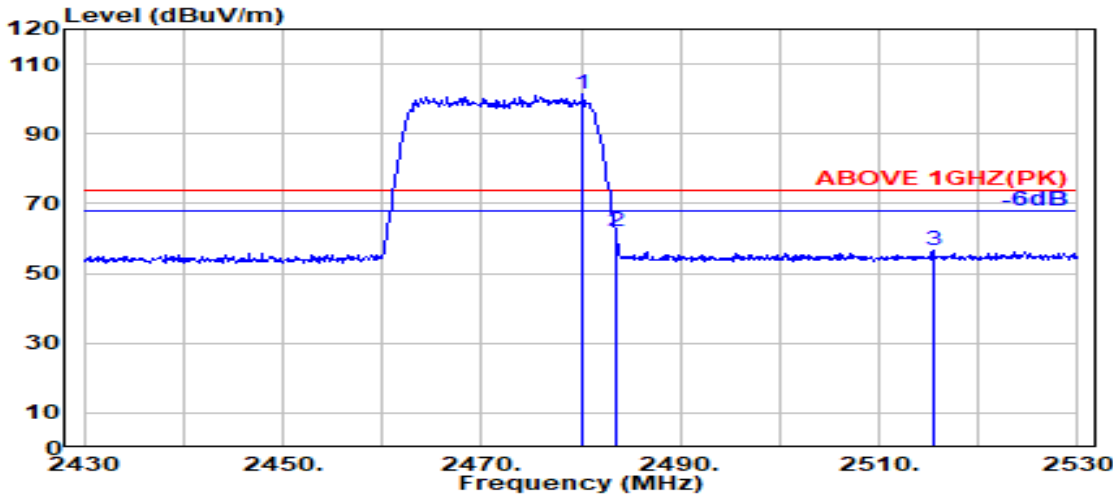

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.36	5.83	39.87	107.07	101.38	---	---	Peak
2483.500	28.37	5.83	39.87	67.67	62.00	74.00	12.00	Peak
2515.400	28.49	5.87	39.88	61.98	56.47	74.00	17.53	Peak

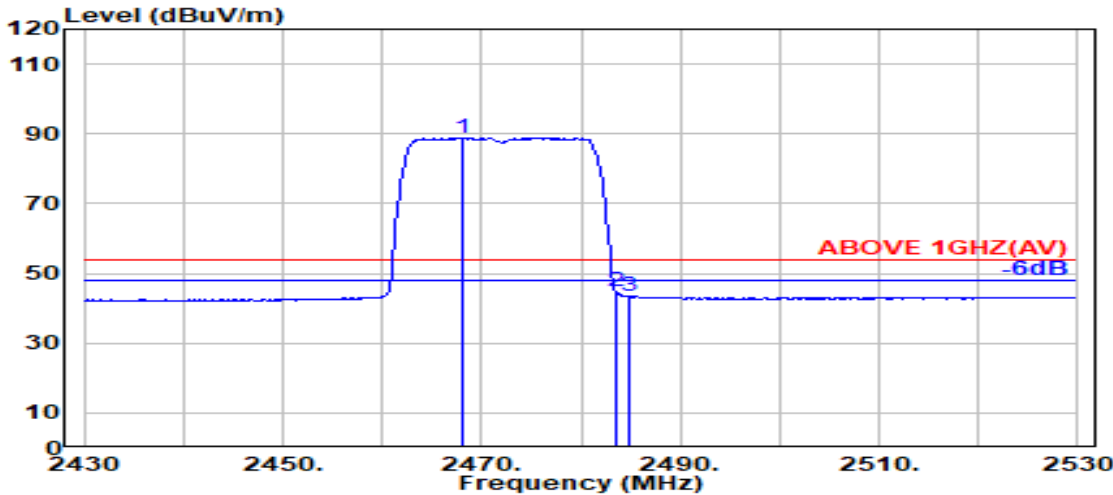


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.34	5.81	39.87	94.56	88.84	---	---	Average
2483.500	28.37	5.83	39.87	50.53	44.86	54.00	9.14	Average
2484.900	28.37	5.83	39.87	49.25	43.59	54.00	10.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

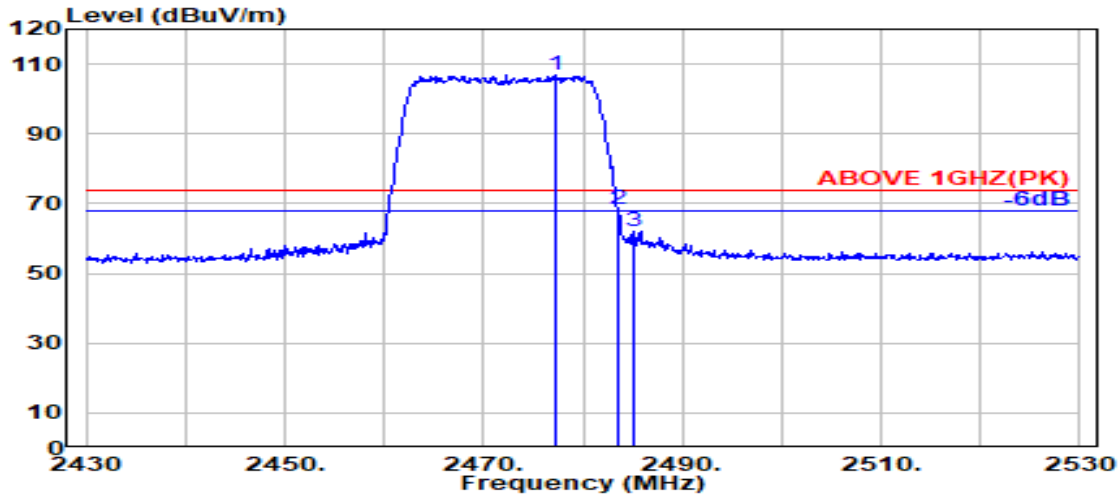

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.200	28.35	5.82	39.87	112.58	106.89	---	---	Peak
2483.500	28.37	5.83	39.87	74.11	68.44	74.00	5.56	Peak
2485.000	28.37	5.83	39.87	67.59	61.92	74.00	12.08	Peak

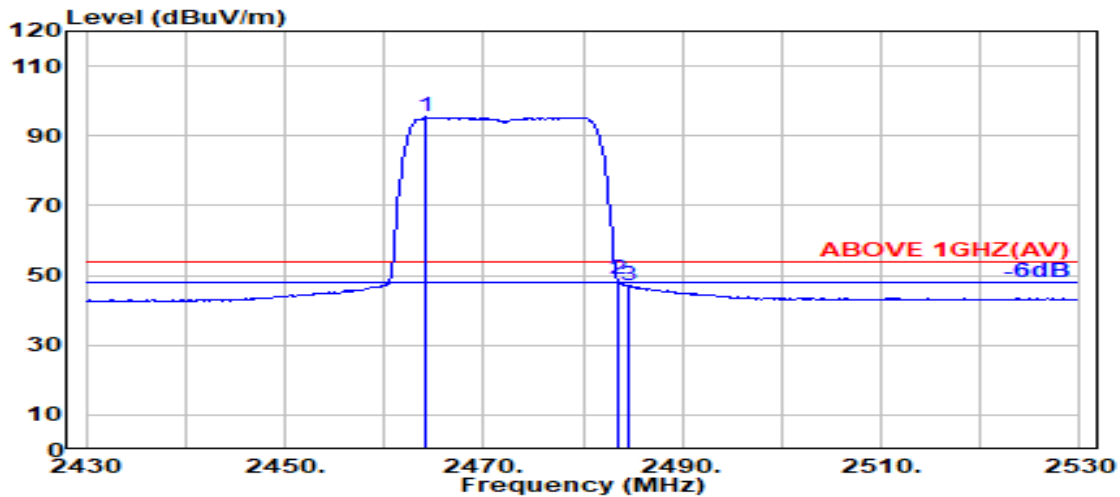


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.33	5.81	39.87	101.13	95.40	---	---	Average
2483.500	28.37	5.83	39.87	54.67	49.00	54.00	5.00	Average
2484.500	28.37	5.83	39.87	52.60	46.93	54.00	7.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

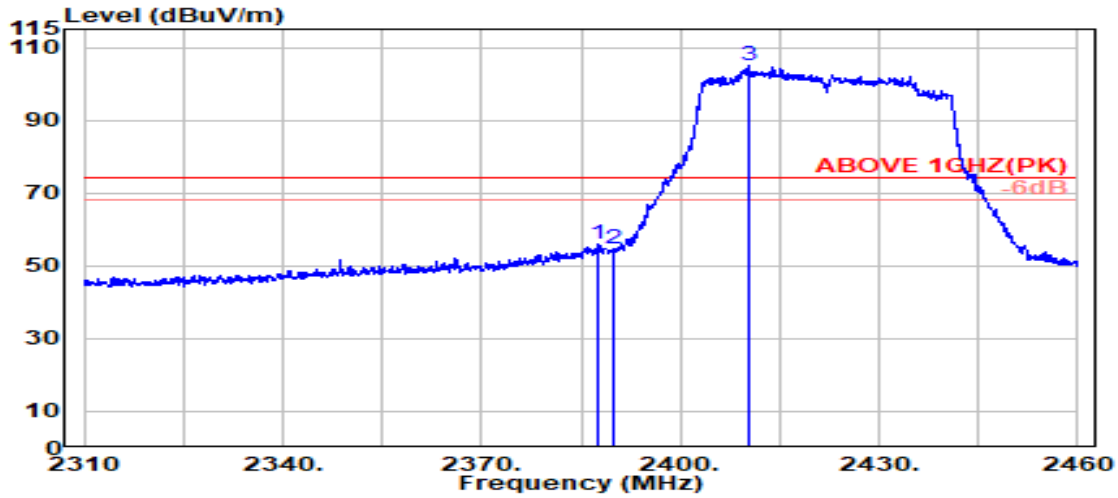

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.397	28.15	5.72	39.88	61.94	55.93	74.00	18.07	Peak
2389.800	28.14	5.72	39.88	60.88	54.86	74.00	19.14	Peak
@ 2410.206	28.14	5.75	39.88	111.07	105.08	---	---	Peak

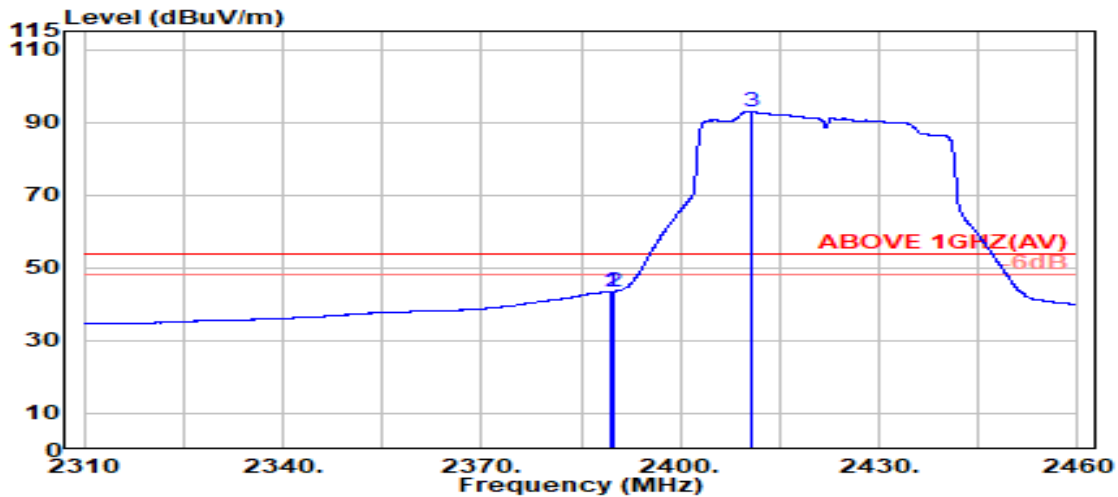


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	49.47	43.45	54.00	10.55	Average
2389.800	28.14	5.72	39.88	49.50	43.48	54.00	10.52	Average
@ 2410.593	28.14	5.75	39.88	98.85	92.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

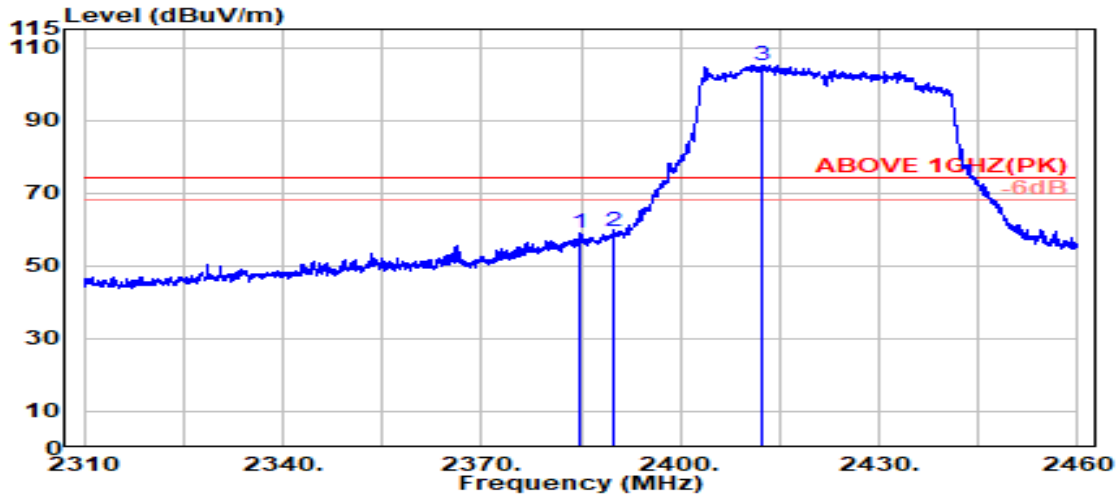

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.768	28.16	5.71	39.88	64.93	58.93	74.00	15.07	Peak
2389.800	28.14	5.72	39.88	65.41	59.39	74.00	14.61	Peak
@ 2412.371	28.15	5.75	39.88	111.05	105.07	---	---	Peak

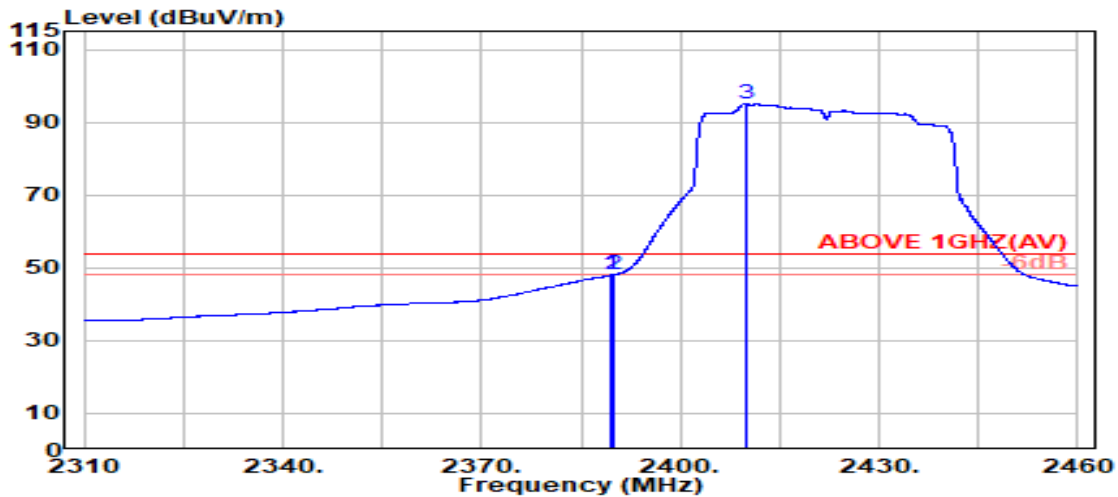


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	54.02	48.00	54.00	6.00	Average
2389.800	28.14	5.72	39.88	54.10	48.08	54.00	5.92	Average
@ 2409.897	28.14	5.74	39.88	101.01	95.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

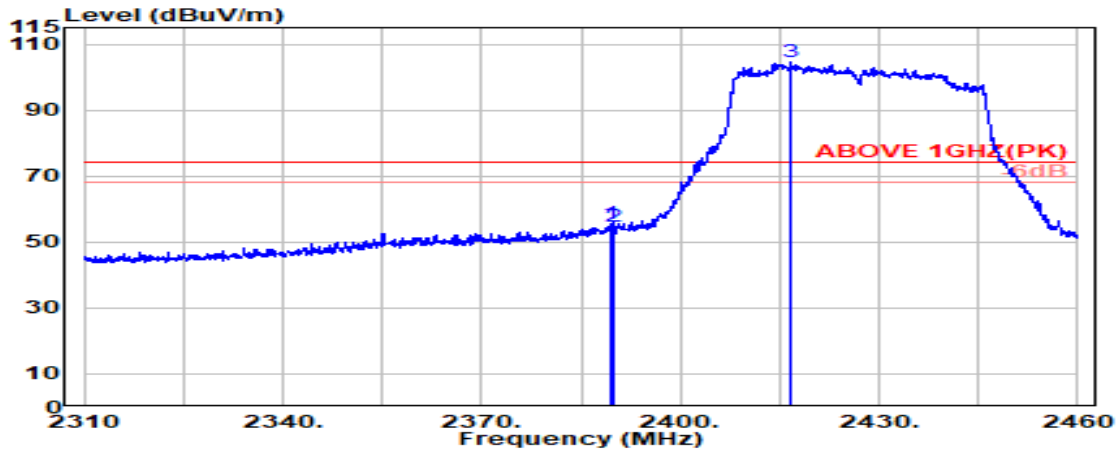

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	61.52	55.50	74.00	18.50	Peak
2389.800	28.14	5.72	39.88	60.52	54.50	74.00	19.50	Peak
@ 2416.701	28.17	5.75	39.88	110.73	104.77	---	---	Peak

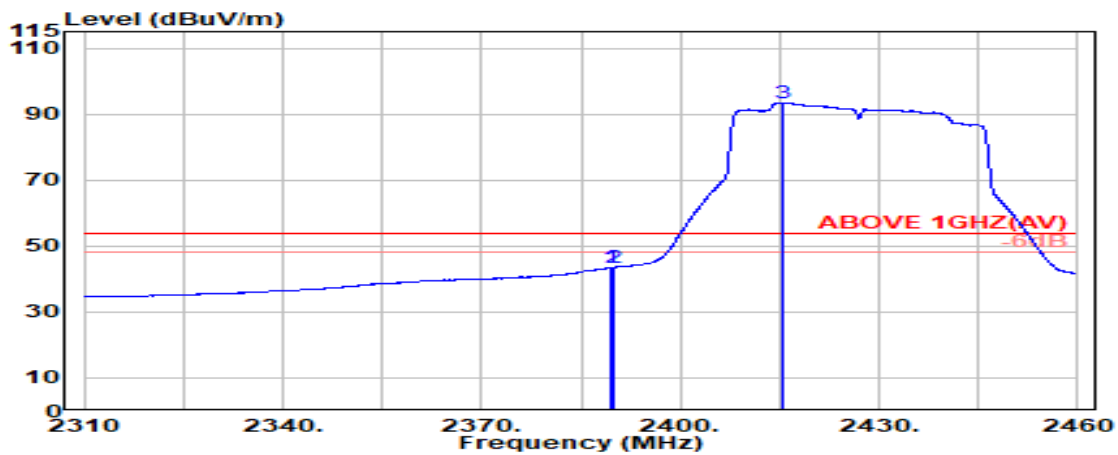


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.562	28.14	5.72	39.88	49.44	43.43	54.00	10.57	Average
2389.800	28.14	5.72	39.88	49.44	43.43	54.00	10.57	Average
@ 2415.541	28.16	5.75	39.88	99.48	93.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

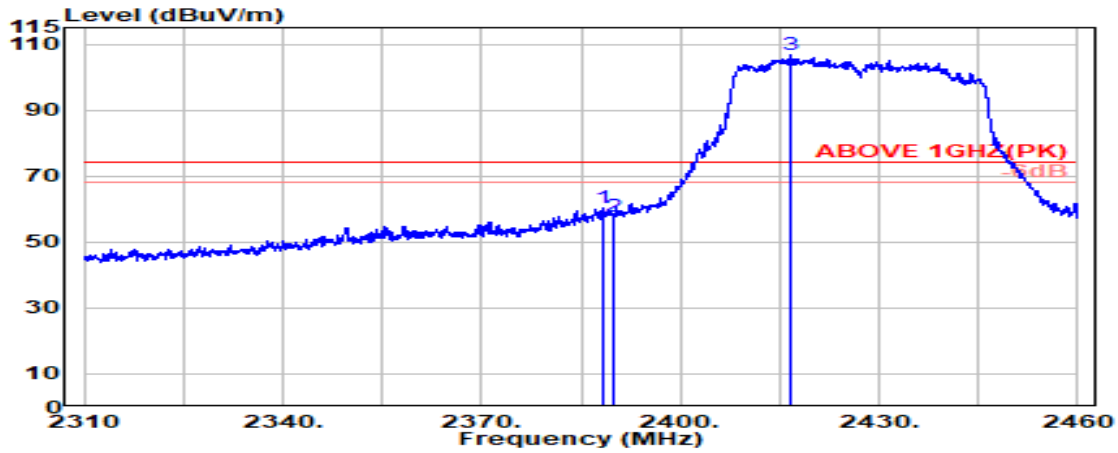

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.247	28.15	5.72	39.88	66.44	60.43	74.00	13.57	Peak
2389.800	28.14	5.72	39.88	63.78	57.77	74.00	16.23	Peak
@ 2416.546	28.17	5.75	39.88	112.73	106.77	---	---	Peak

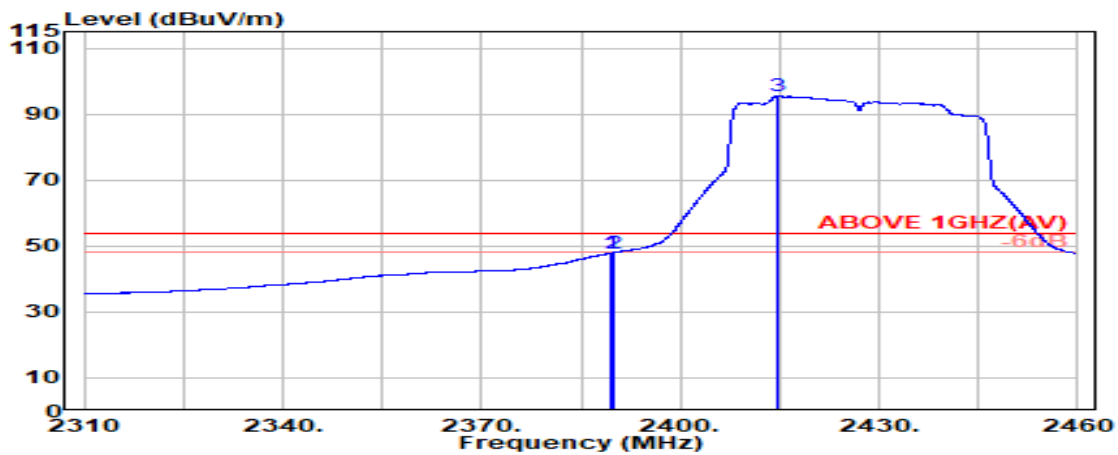


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	53.86	47.84	54.00	6.16	Average
2389.800	28.14	5.72	39.88	53.89	47.87	54.00	6.13	Average
@ 2414.768	28.16	5.75	39.88	101.45	95.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

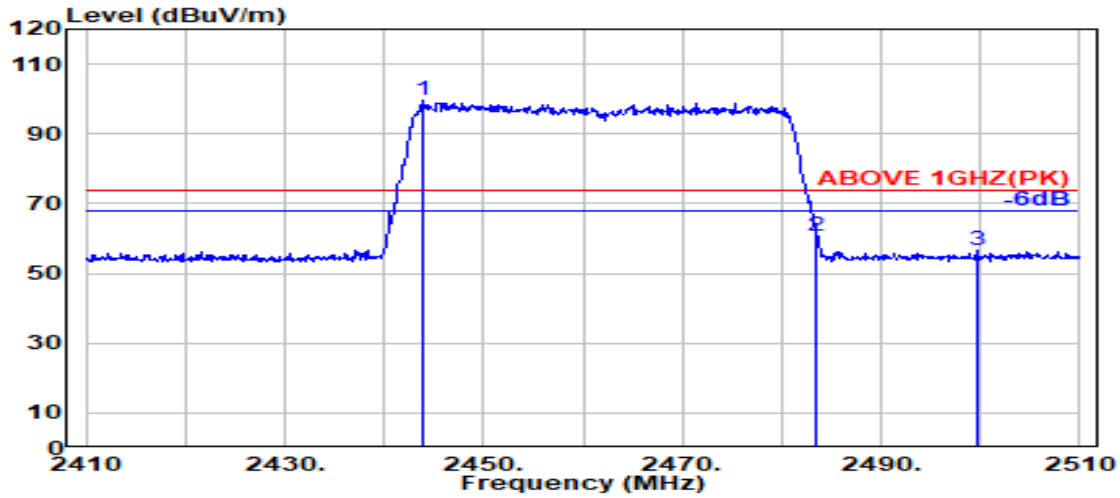

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2443.900	28.28	5.78	39.87	105.36	99.55	---	---	Peak
2483.500	28.37	5.83	39.87	66.51	60.83	74.00	13.17	Peak
2499.700	28.40	5.85	39.87	62.14	56.52	74.00	17.48	Peak

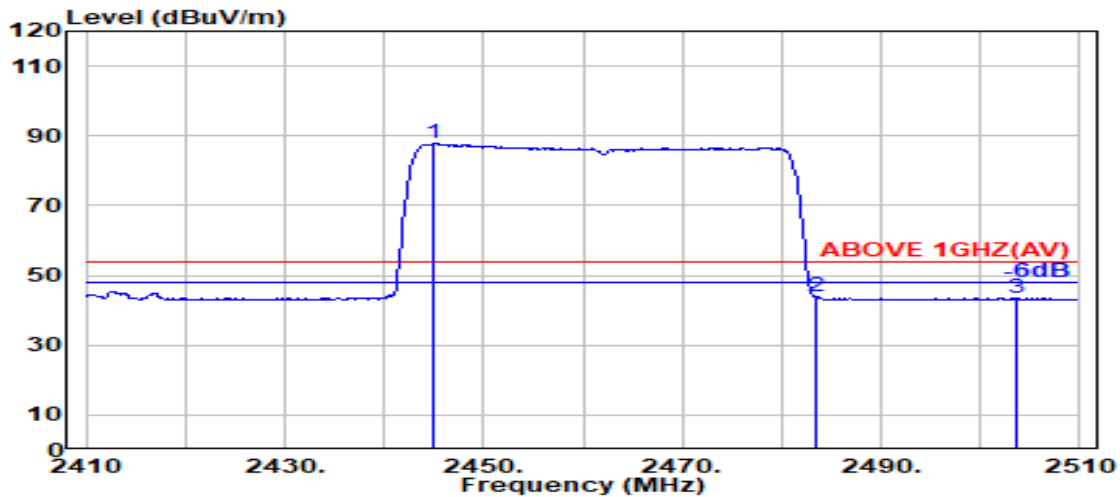


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.000	28.28	5.79	39.87	93.75	87.94	---	---	Average
2483.500	28.37	5.83	39.87	49.60	43.93	54.00	10.07	Average
2503.600	28.42	5.85	39.87	49.01	43.42	54.00	10.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

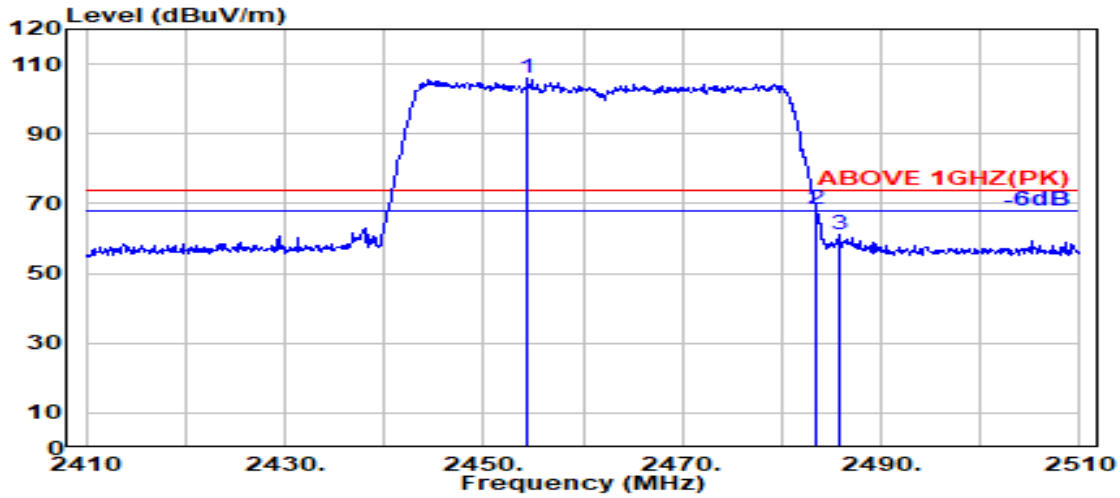

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.400	28.31	5.80	39.87	111.92	106.15	---	---	Peak
2483.500	28.37	5.83	39.87	73.95	68.28	74.00	5.72	Peak
2485.800	28.37	5.83	39.87	66.91	61.25	74.00	12.75	Peak

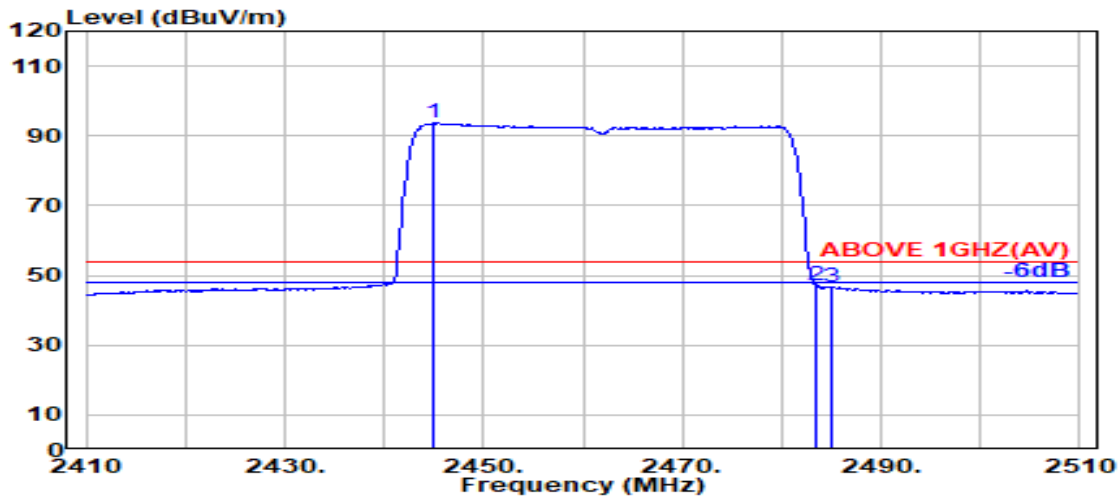


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.000	28.28	5.79	39.87	99.50	93.69	---	---	Average
2483.500	28.37	5.83	39.87	52.82	47.14	54.00	6.86	Average
2485.100	28.37	5.83	39.87	52.28	46.61	54.00	7.39	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

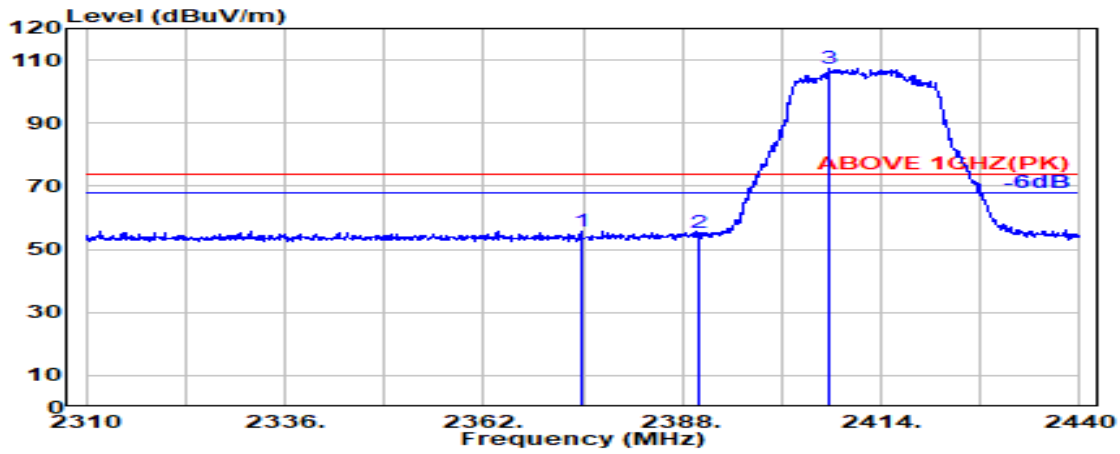

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.700	28.20	5.70	39.88	61.83	55.86	74.00	18.14	Peak
2390.000	28.14	5.72	39.88	61.29	55.28	74.00	18.72	Peak
@ 2407.300	28.13	5.74	39.88	113.29	107.29	---	---	Peak

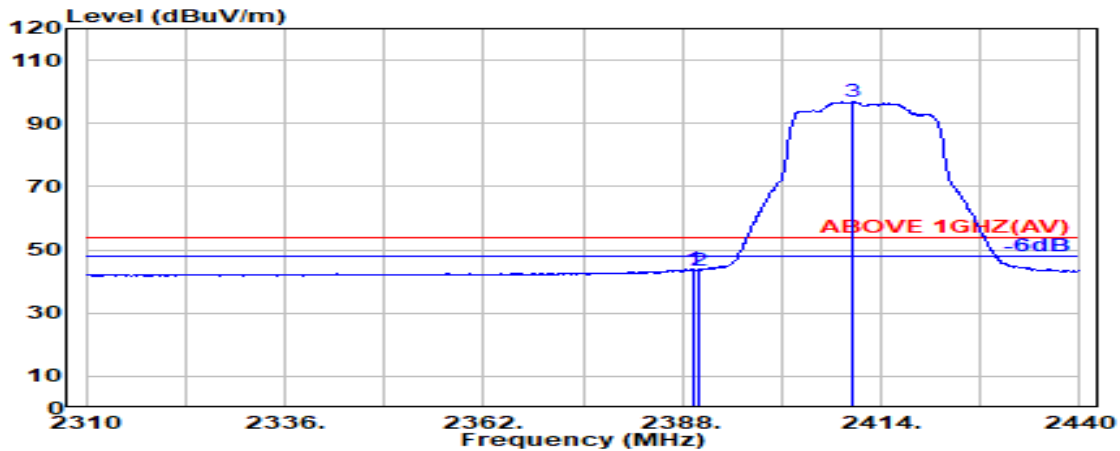


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	49.85	43.84	54.00	10.16	Average
2390.000	28.14	5.72	39.88	49.69	43.68	54.00	10.33	Average
@ 2410.100	28.14	5.74	39.88	102.89	96.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

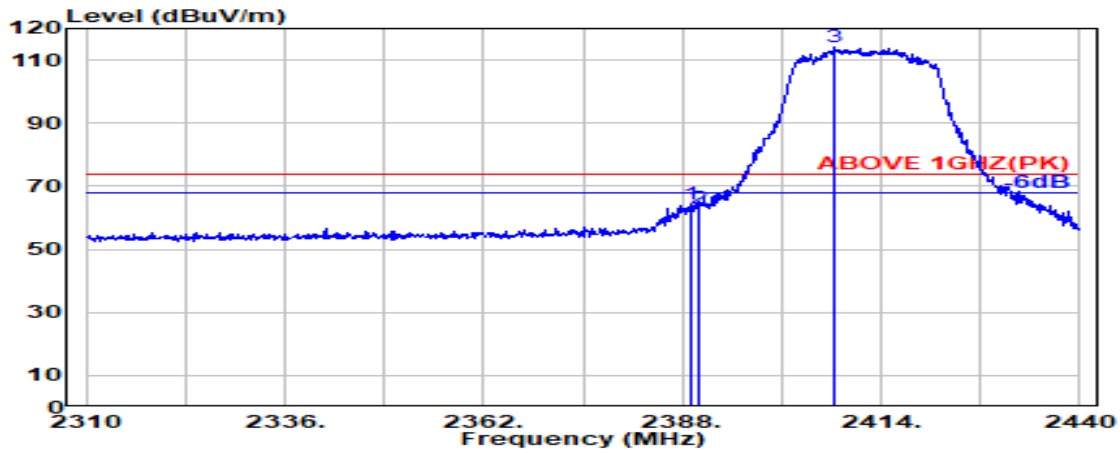

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	70.17	64.16	74.00	9.84	Peak
2390.000	28.14	5.72	39.88	69.14	63.12	74.00	10.88	Peak
@ 2407.800	28.13	5.74	39.88	119.91	113.90	---	---	Peak

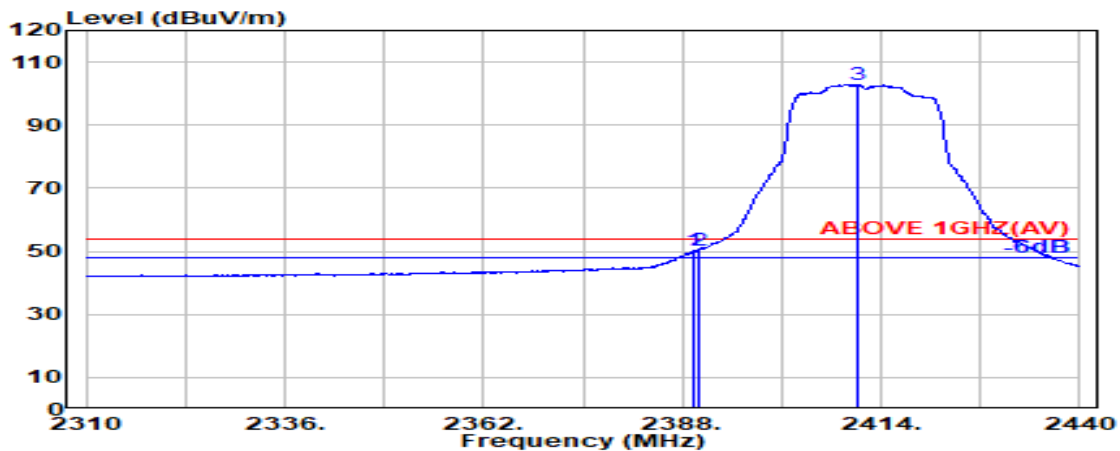


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	56.12	50.10	54.00	3.90	Average
2390.000	28.14	5.72	39.88	56.25	50.23	54.00	3.77	Average
@ 2411.000	28.14	5.75	39.88	108.89	102.90	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

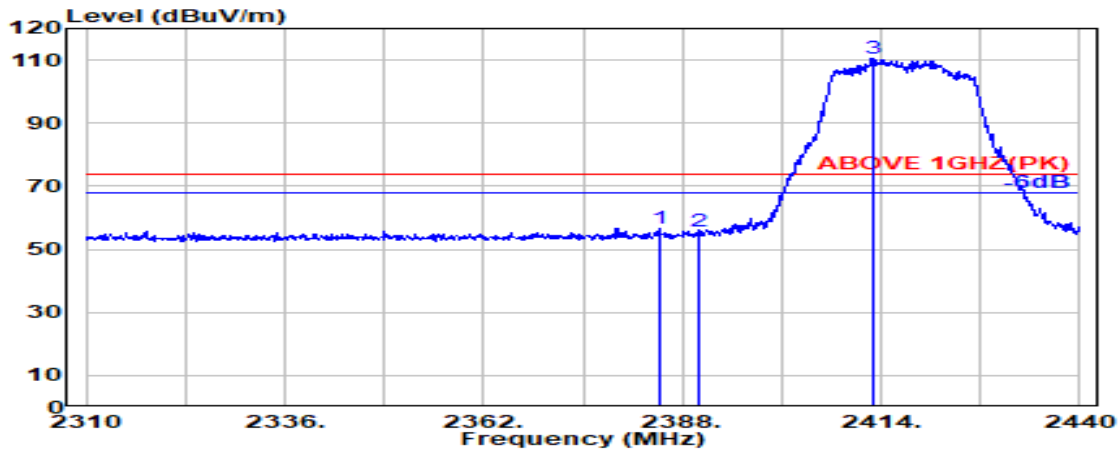

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.900	28.16	5.71	39.88	62.41	56.41	74.00	17.59	Peak
2390.000	28.14	5.72	39.88	61.60	55.58	74.00	18.42	Peak
@ 2412.900	28.15	5.75	39.88	116.44	110.47	---	---	Peak

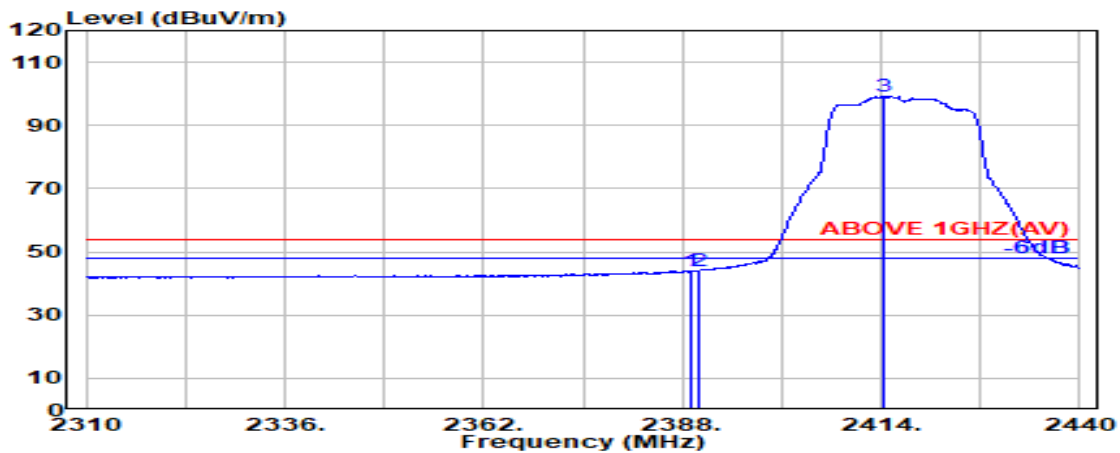


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	50.05	44.04	54.00	9.96	Average
2390.000	28.14	5.72	39.88	49.98	43.97	54.00	10.03	Average
@ 2414.200	28.16	5.75	39.88	105.04	99.07	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

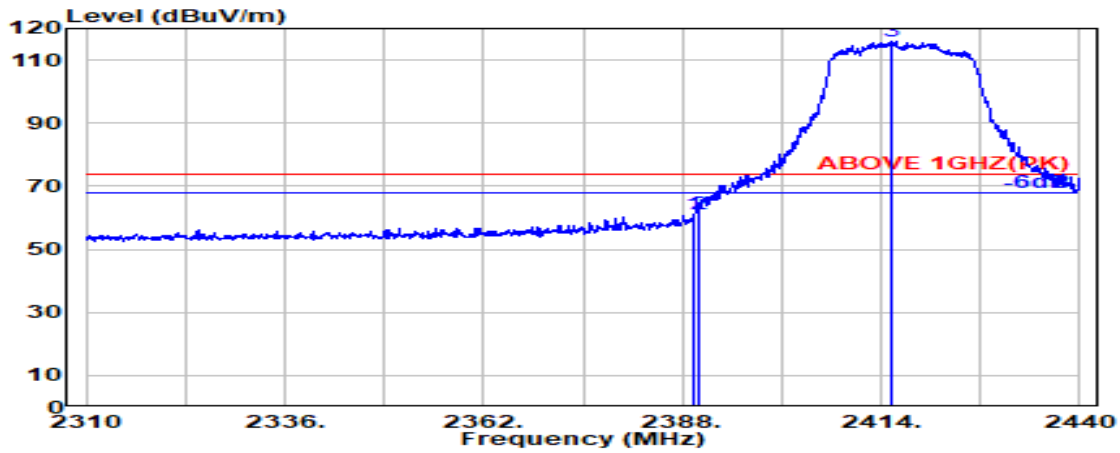

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	67.10	61.08	74.00	12.92	Peak
2390.000	28.14	5.72	39.88	67.33	61.32	74.00	12.68	Peak
@ 2415.500	28.16	5.75	39.88	121.98	116.02	---	---	Peak

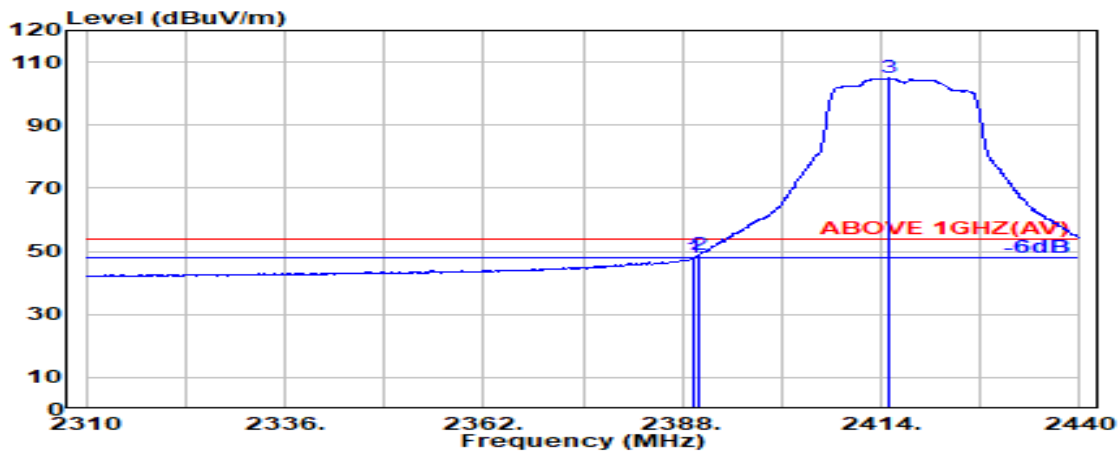


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	54.06	48.04	54.00	5.96	Average
2390.000	28.14	5.72	39.88	54.70	48.68	54.00	5.32	Average
@ 2414.900	28.16	5.75	39.88	110.92	104.95	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

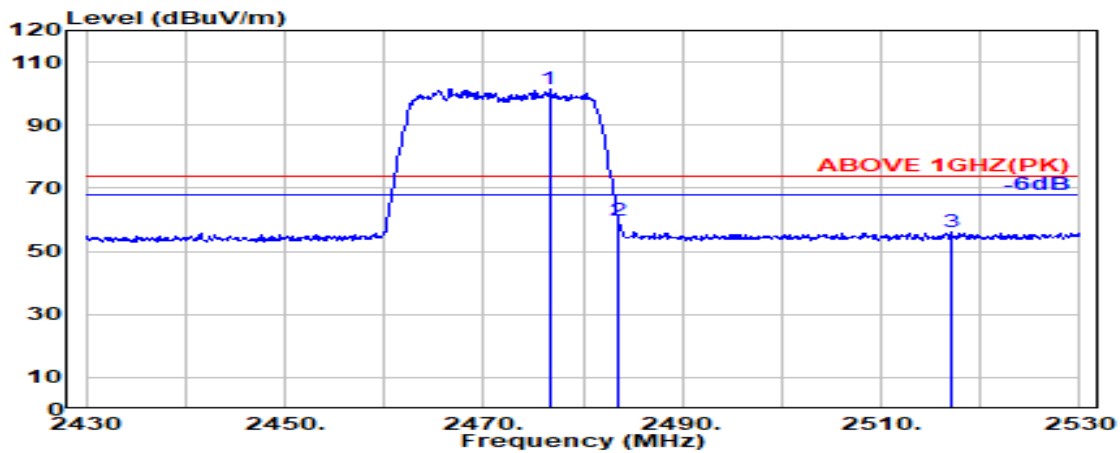

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.600	28.35	5.82	39.87	107.15	101.46	---	---	Peak
2483.500	28.37	5.83	39.87	65.49	59.82	74.00	14.18	Peak
2517.000	28.50	5.87	39.88	61.52	56.02	74.00	17.98	Peak

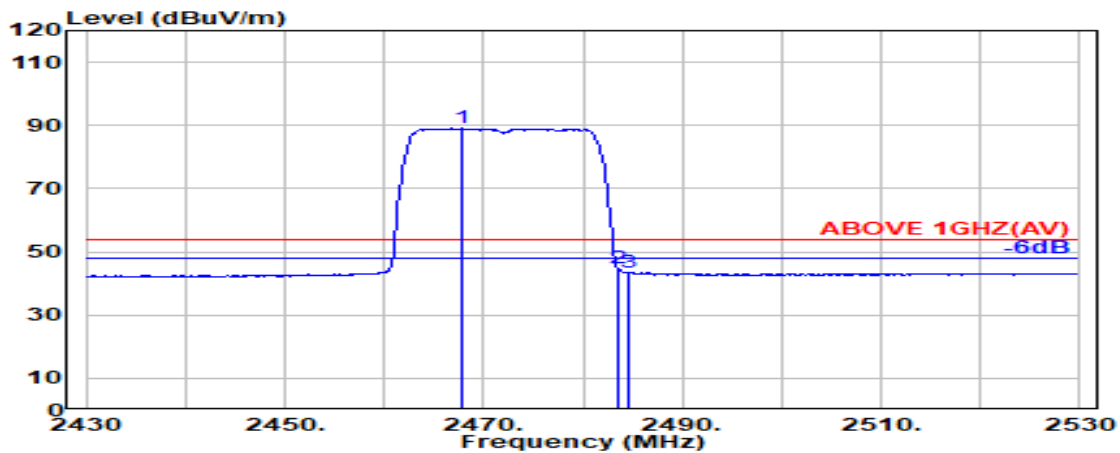


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.900	28.34	5.81	39.87	94.74	89.02	---	---	Average
2483.500	28.37	5.83	39.87	50.52	44.85	54.00	9.15	Average
2484.600	28.37	5.83	39.87	49.22	43.55	54.00	10.45	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

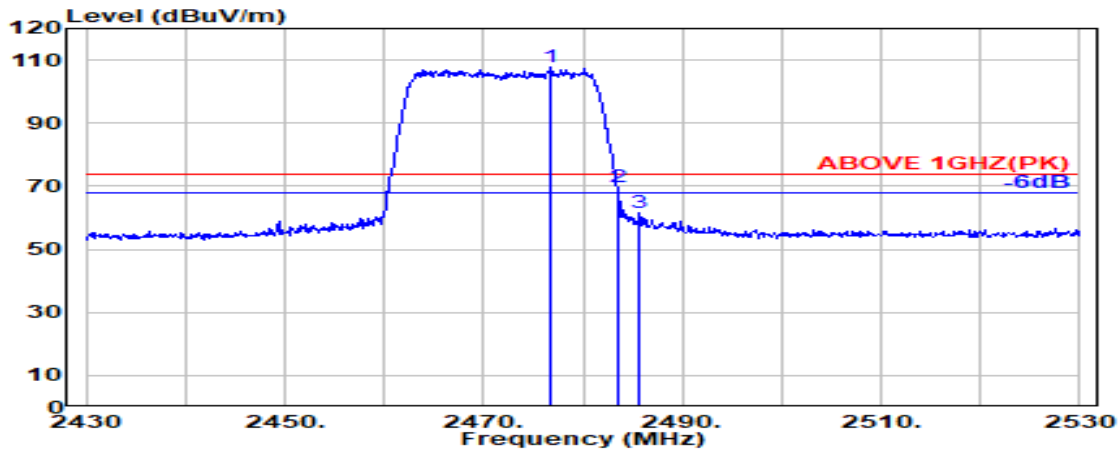

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.800	28.35	5.82	39.87	113.56	107.87	---	---	Peak
2483.500	28.37	5.83	39.87	75.53	69.86	74.00	4.14	Peak
2485.700	28.37	5.83	39.87	67.10	61.43	74.00	12.57	Peak

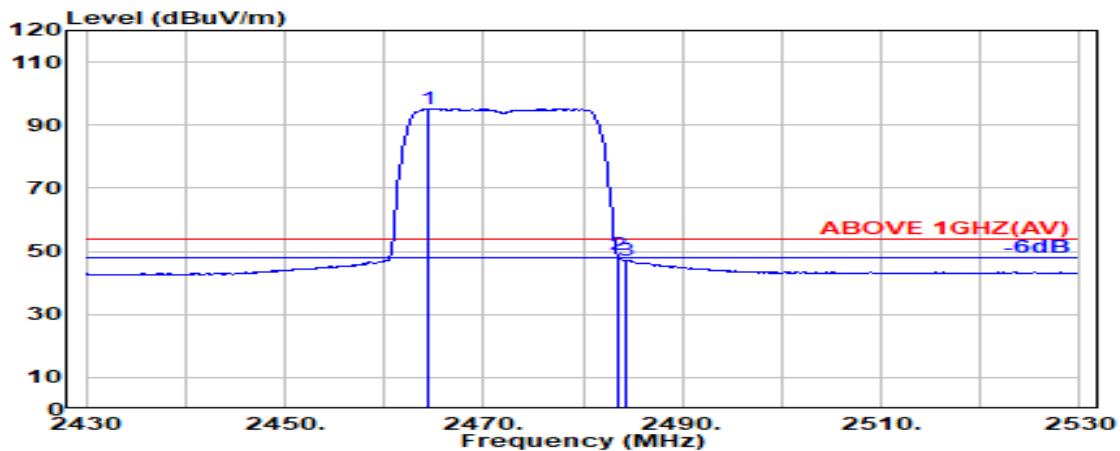


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.33	5.81	39.87	100.87	95.13	---	---	Average
2483.500	28.37	5.83	39.87	54.48	48.81	54.00	5.19	Average
2484.400	28.37	5.83	39.87	52.67	47.00	54.00	7.00	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

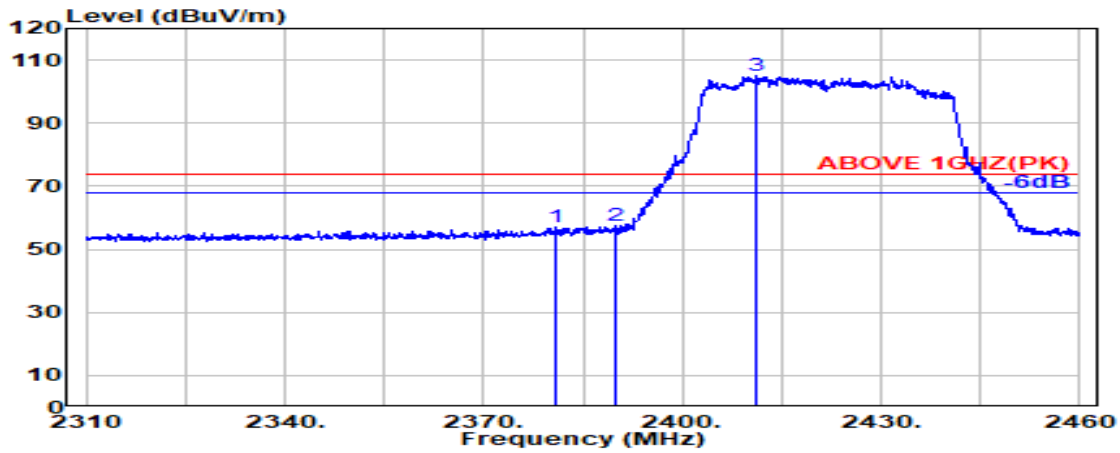

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.000	28.18	5.71	39.88	63.20	57.21	74.00	16.79	Peak
2390.000	28.14	5.72	39.88	63.59	57.58	74.00	16.42	Peak
@ 2411.200	28.15	5.75	39.88	111.20	105.22	---	---	Peak

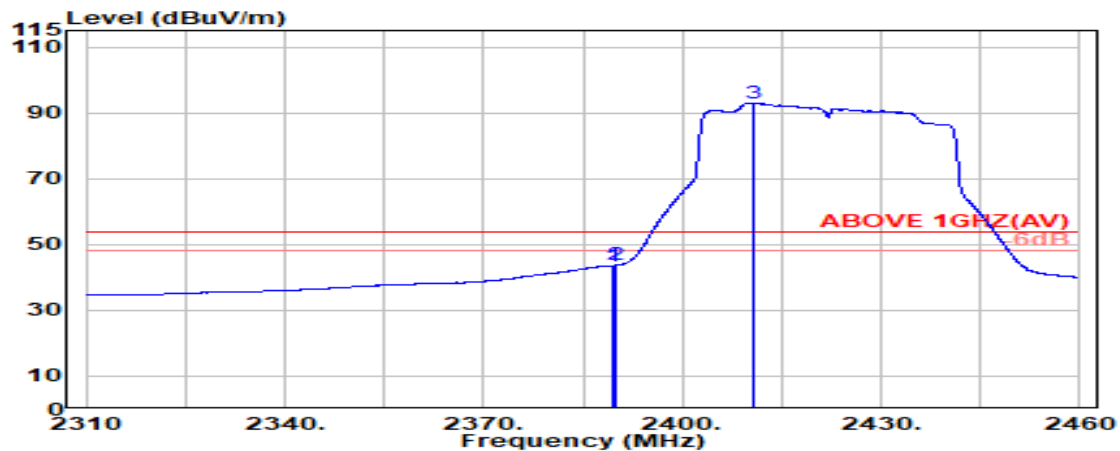


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	49.62	43.60	54.00	10.40	Average
2389.800	28.14	5.72	39.88	49.69	43.67	54.00	10.33	Average
@ 2410.593	28.14	5.75	39.88	99.01	93.02	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

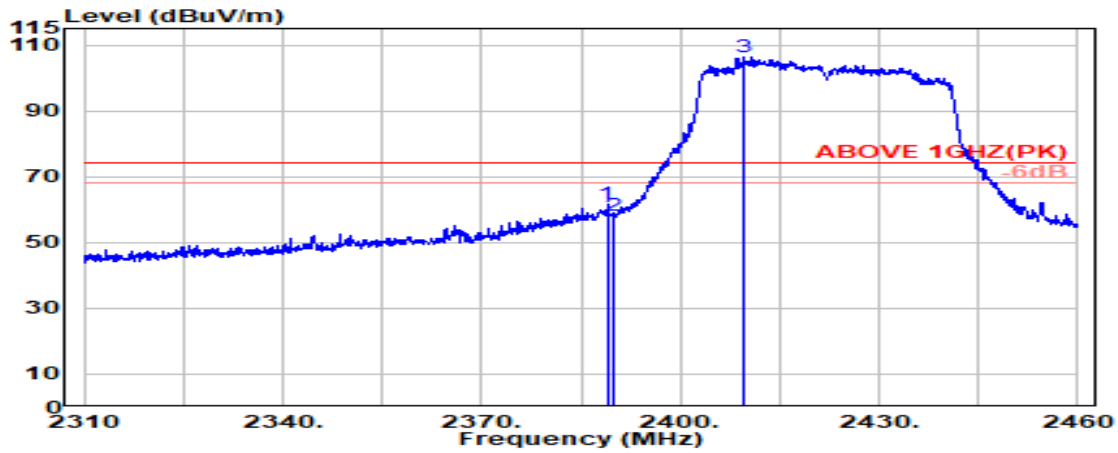

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.943	28.14	5.72	39.88	67.51	61.50	74.00	12.50	Peak
2389.800	28.14	5.72	39.88	64.11	58.09	74.00	15.91	Peak
@ 2409.665	28.14	5.74	39.88	112.40	106.40	---	---	Peak

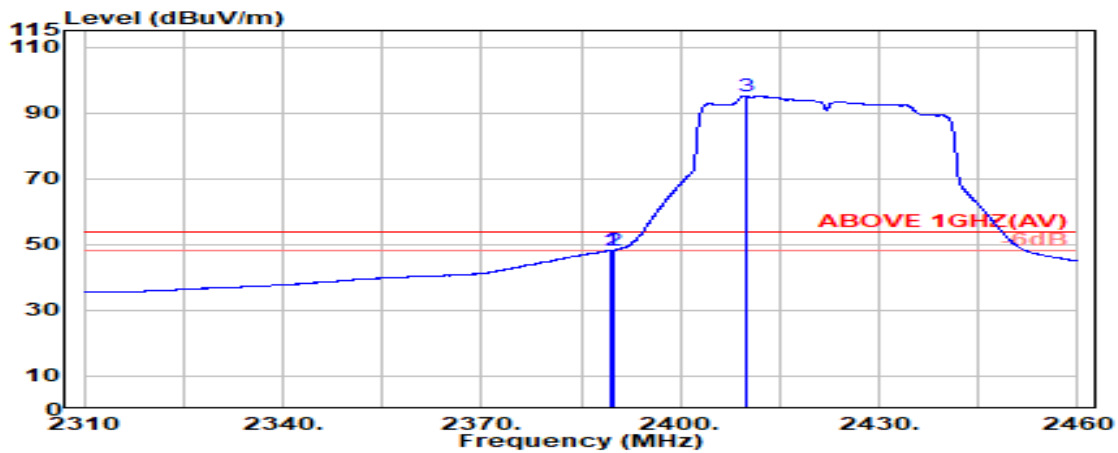


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	54.19	48.18	54.00	5.82	Average
2389.800	28.14	5.72	39.88	54.22	48.20	54.00	5.80	Average
@ 2409.820	28.14	5.74	39.88	101.11	95.12	--	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

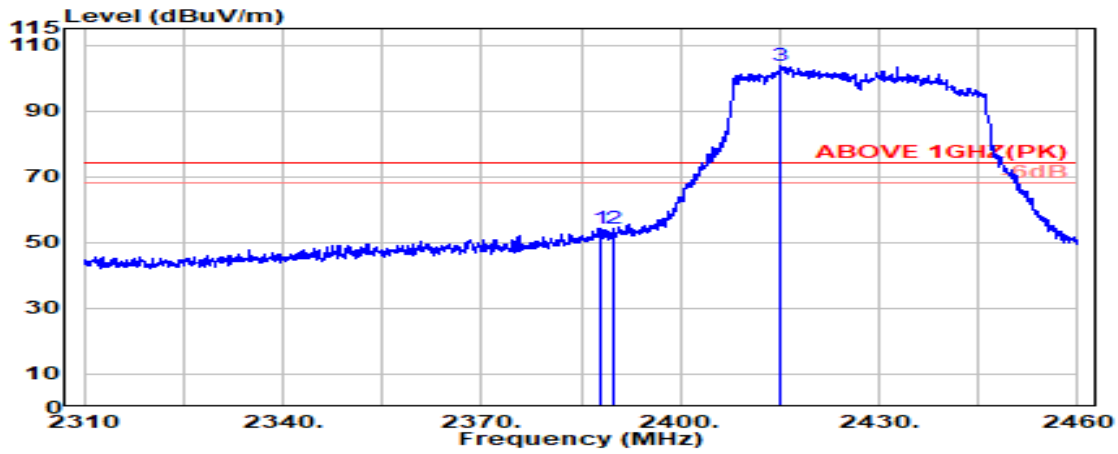

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.015	28.15	5.72	39.88	60.23	54.22	74.00	19.78	Peak
2389.800	28.14	5.72	39.88	60.25	54.23	74.00	19.77	Peak
@ 2415.077	28.16	5.75	39.88	109.47	103.50	---	---	Peak

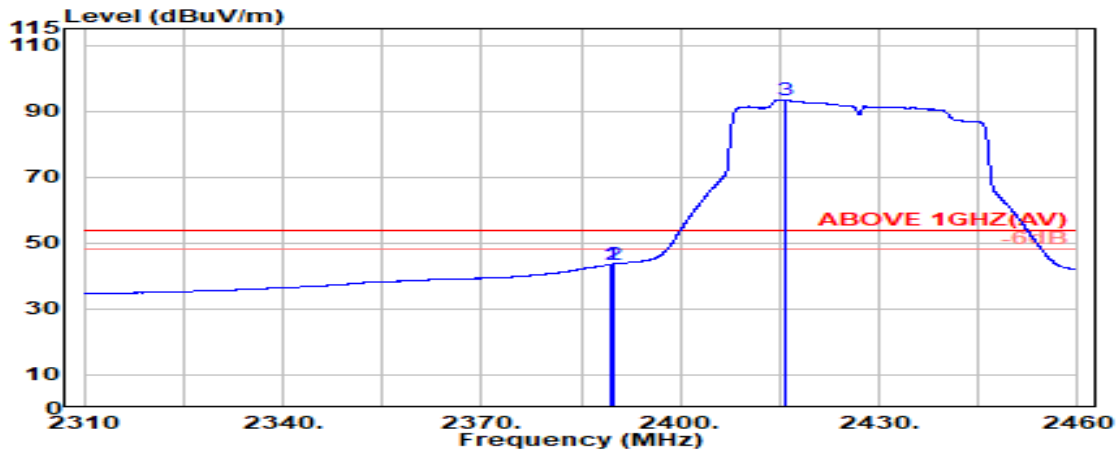


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.639	28.14	5.72	39.88	49.52	43.50	54.00	10.50	Average
2389.800	28.14	5.72	39.88	49.57	43.55	54.00	10.45	Average
@ 2415.773	28.16	5.75	39.88	99.44	93.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

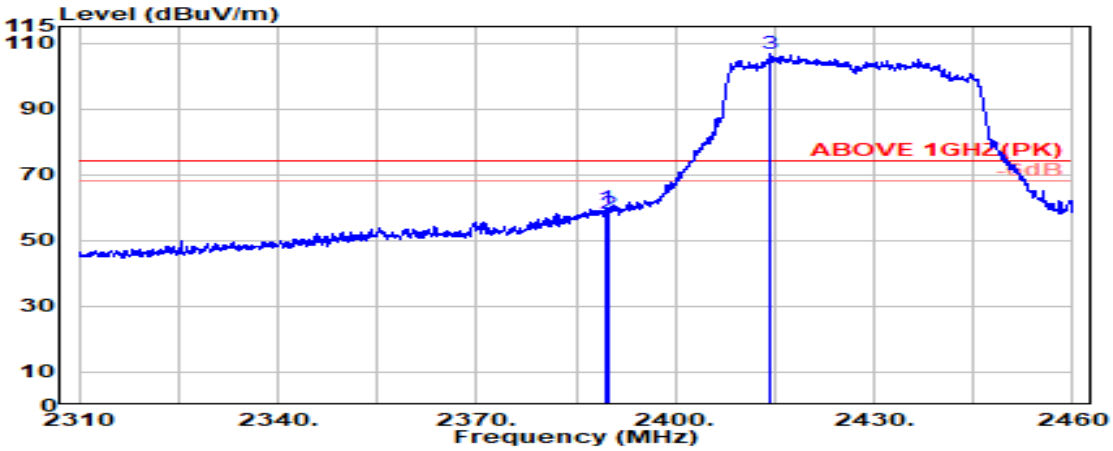

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.562	28.14	5.72	39.88	65.86	59.84	74.00	14.16	Peak
2389.800	28.14	5.72	39.88	64.34	58.32	74.00	15.68	Peak
@ 2414.459	28.16	5.75	39.88	112.70	106.73	---	---	Peak

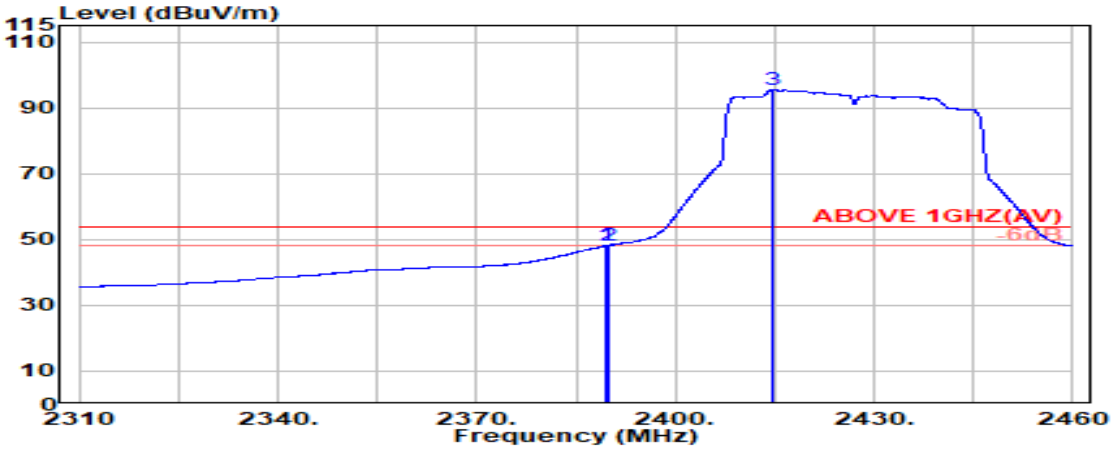


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.562	28.14	5.72	39.88	54.05	48.04	54.00	5.96	Average
2389.800	28.14	5.72	39.88	54.09	48.07	54.00	5.93	Average
@ 2414.768	28.16	5.75	39.88	101.56	95.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

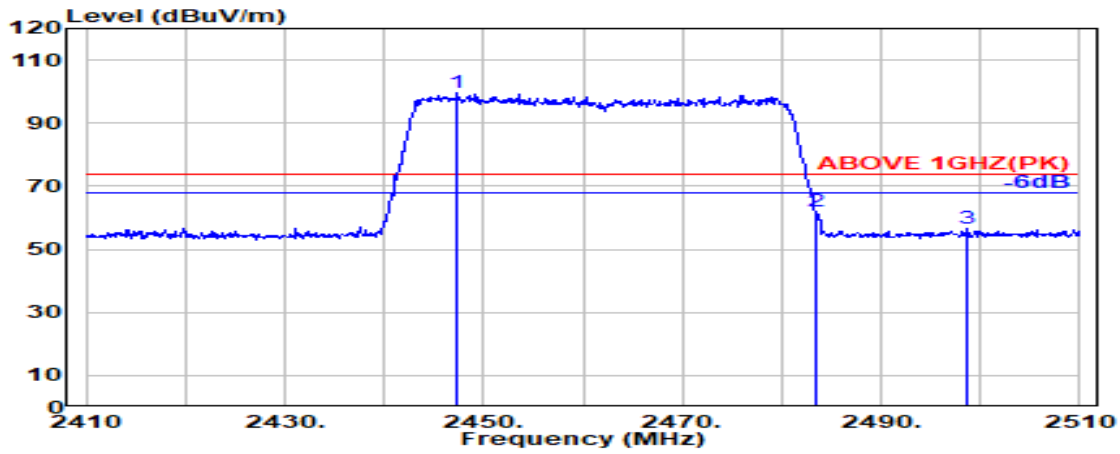

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.300	28.29	5.79	39.87	105.43	99.64	---	---	Peak
2483.500	28.37	5.83	39.87	67.84	62.17	74.00	11.83	Peak
2498.600	28.40	5.85	39.87	62.07	56.44	74.00	17.56	Peak

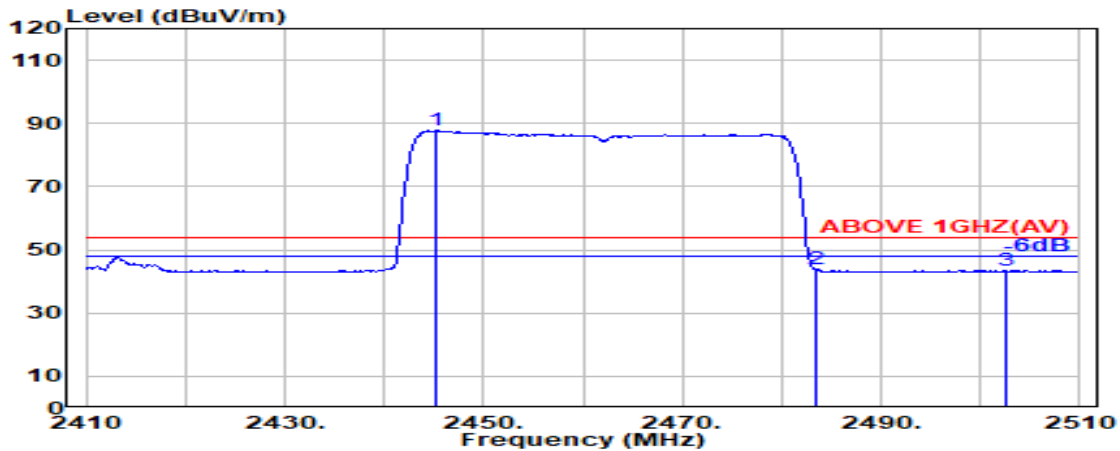


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.300	28.28	5.79	39.87	93.66	87.85	---	---	Average
2483.500	28.37	5.83	39.87	49.48	43.80	54.00	10.20	Average
2502.500	28.42	5.85	39.87	49.10	43.50	54.00	10.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

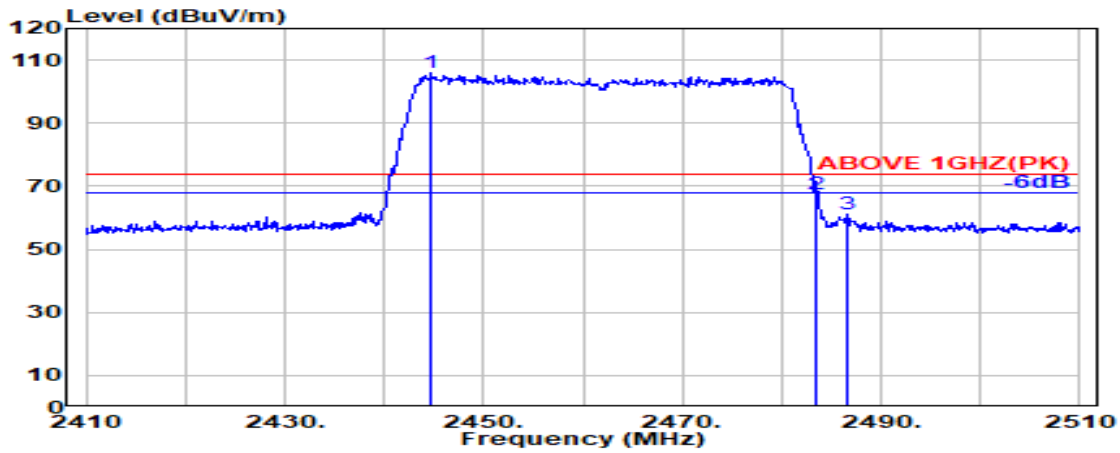

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.700	28.28	5.79	39.87	111.94	106.13	---	---	Peak
2483.500	28.37	5.83	39.87	73.03	67.36	74.00	6.64	Peak
2486.500	28.37	5.83	39.87	66.75	61.09	74.00	12.91	Peak

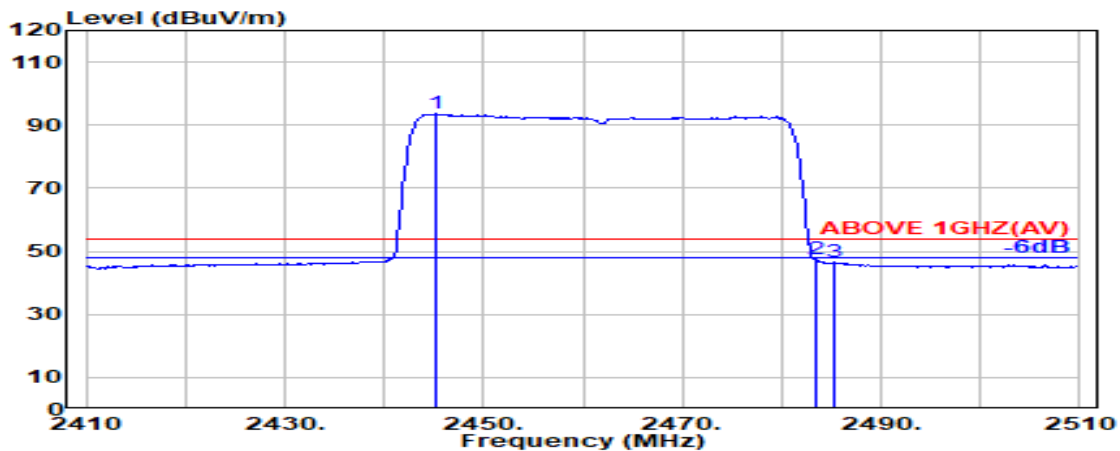


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.200	28.28	5.79	39.87	99.43	93.62	---	---	Average
2483.500	28.37	5.83	39.87	53.11	47.44	54.00	6.56	Average
2485.400	28.37	5.83	39.87	52.08	46.42	54.00	7.58	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

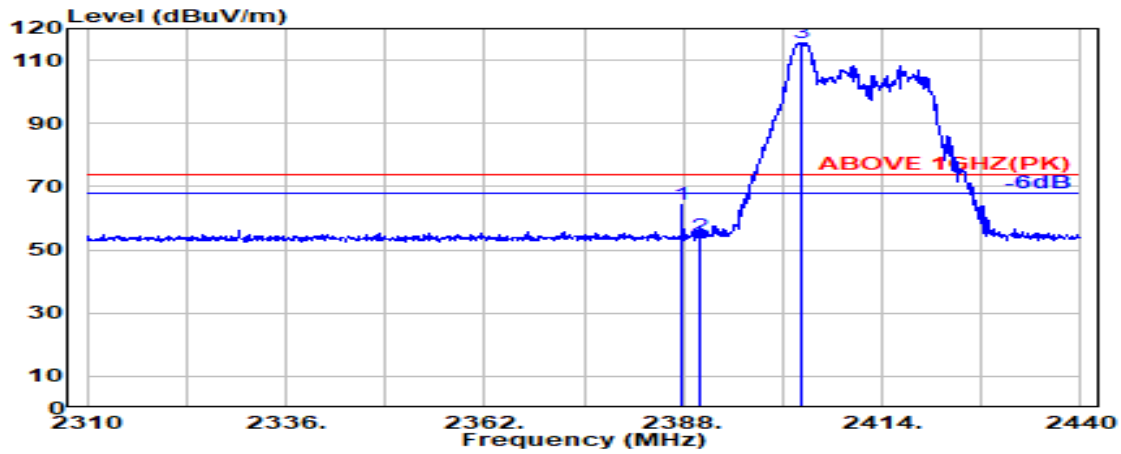

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.800	28.15	5.72	39.88	70.13	64.12	74.00	9.88	Peak
2390.000	28.14	5.72	39.88	60.15	54.13	74.00	19.87	Peak
@ 2403.300	28.11	5.74	39.88	121.72	115.69	---	---	Peak

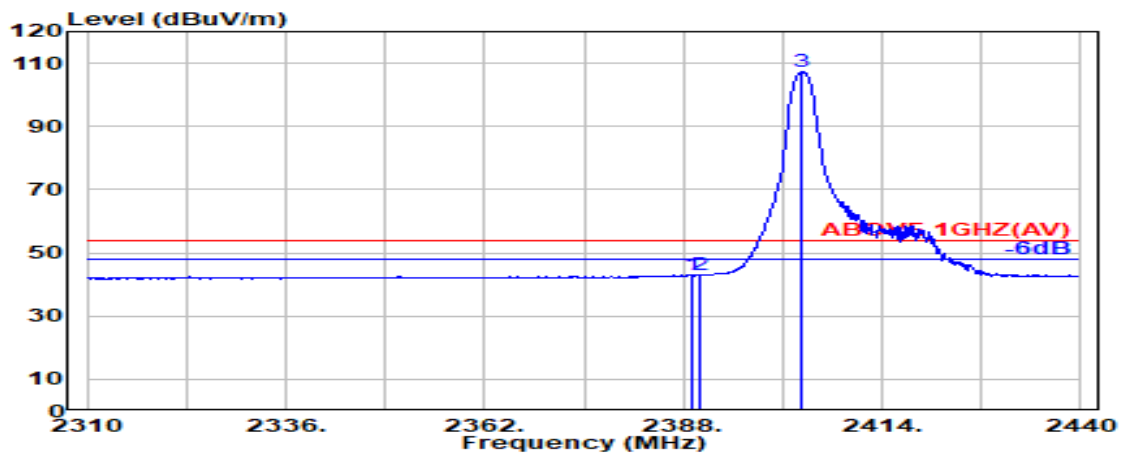


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	49.14	43.13	54.00	10.87	Average
2390.000	28.14	5.72	39.88	48.91	42.89	54.00	11.11	Average
@ 2403.400	28.11	5.74	39.88	113.36	107.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

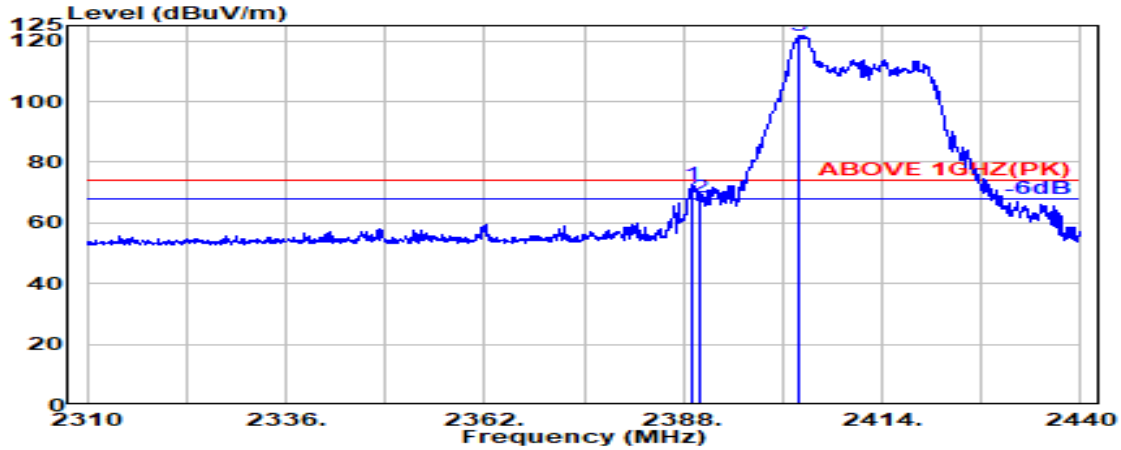

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.88	78.50	72.49	74.00	1.51	Peak
2390.000	28.14	5.72	39.88	74.53	68.51	74.00	5.49	Peak
@ 2403.200	28.11	5.74	39.88	127.76	121.74	---	---	Peak

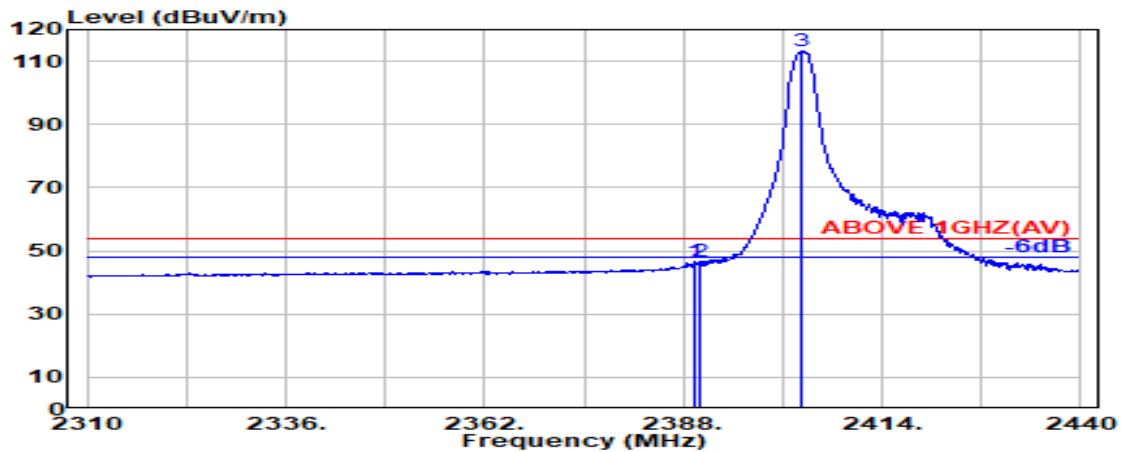


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	52.65	46.64	54.00	7.36	Average
2390.000	28.14	5.72	39.88	52.67	46.65	54.00	7.35	Average
@ 2403.600	28.11	5.74	39.88	119.14	113.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

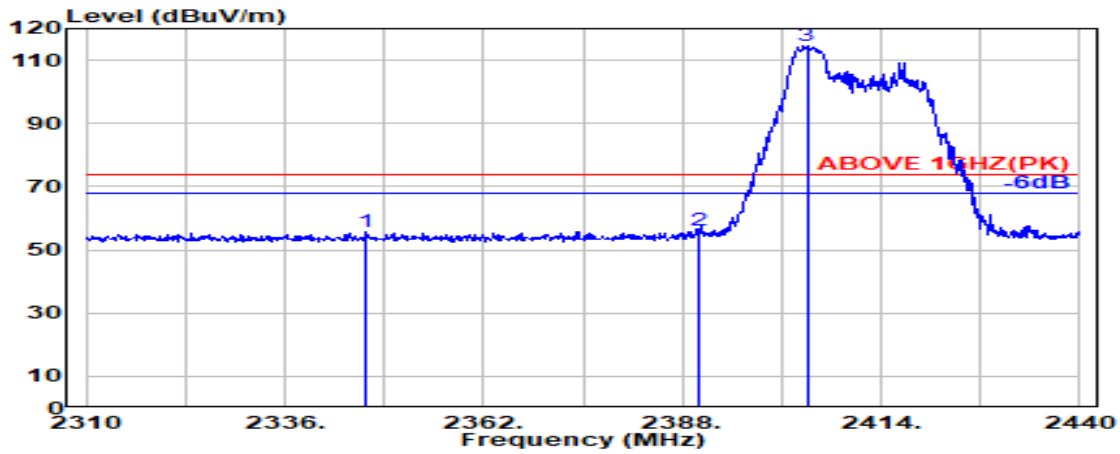

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2346.600	28.28	5.67	39.88	61.76	55.83	74.00	18.17	Peak
2390.000	28.14	5.72	39.88	62.24	56.23	74.00	17.77	Peak
@ 2404.300	28.12	5.74	39.88	120.42	114.39	---	---	Peak

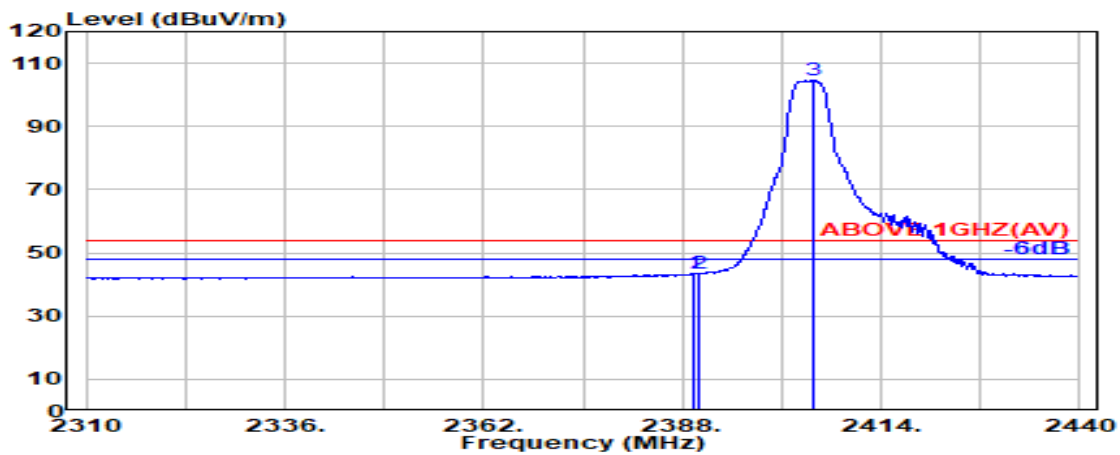


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	49.60	43.59	54.00	10.41	Average
2390.000	28.14	5.72	39.88	49.38	43.36	54.00	10.64	Average
@ 2405.200	28.12	5.74	39.88	110.67	104.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

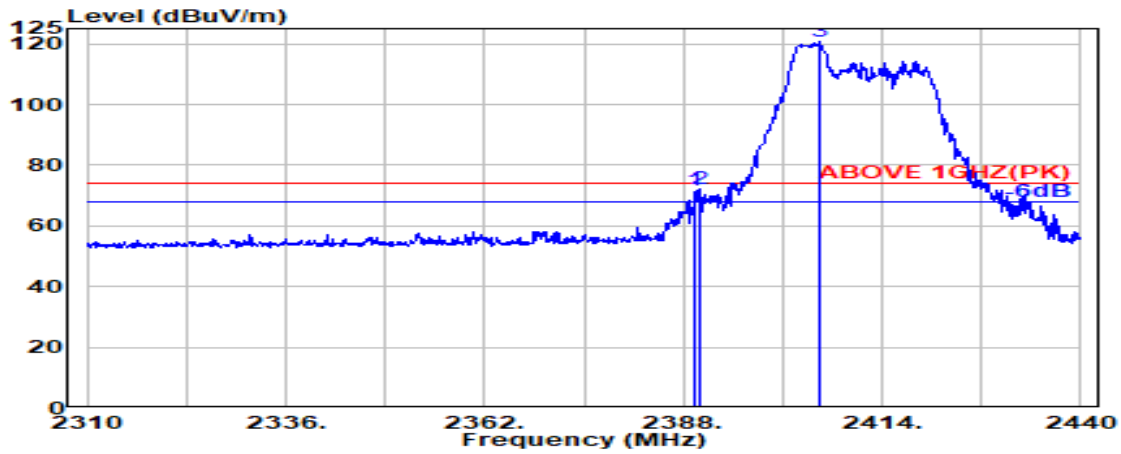

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	77.93	71.91	74.00	2.09	Peak
2390.000	28.14	5.72	39.88	78.23	72.21	74.00	1.79	Peak
@ 2405.900	28.12	5.74	39.88	126.63	120.62	---	---	Peak

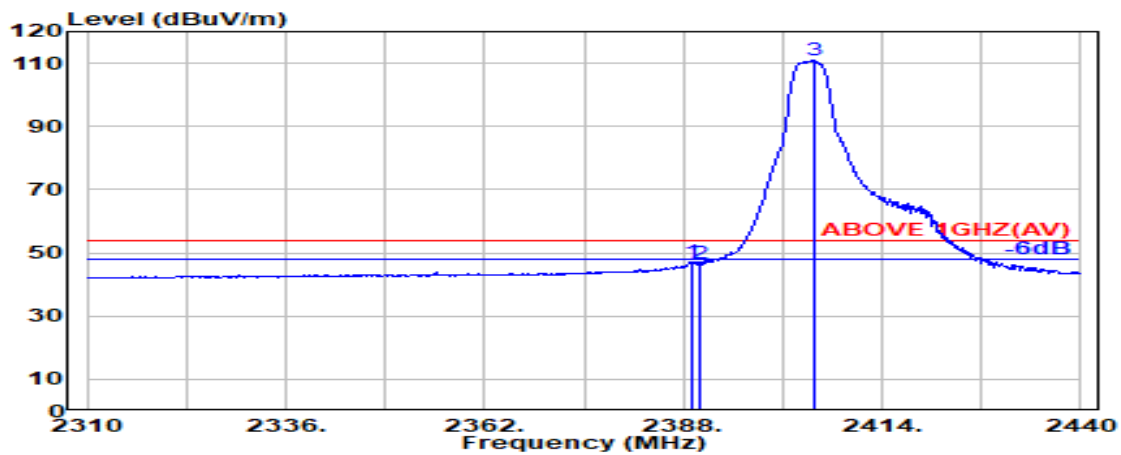


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	53.22	47.21	54.00	6.79	Average
2390.000	28.14	5.72	39.88	52.66	46.65	54.00	7.35	Average
@ 2405.000	28.12	5.74	39.88	116.81	110.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

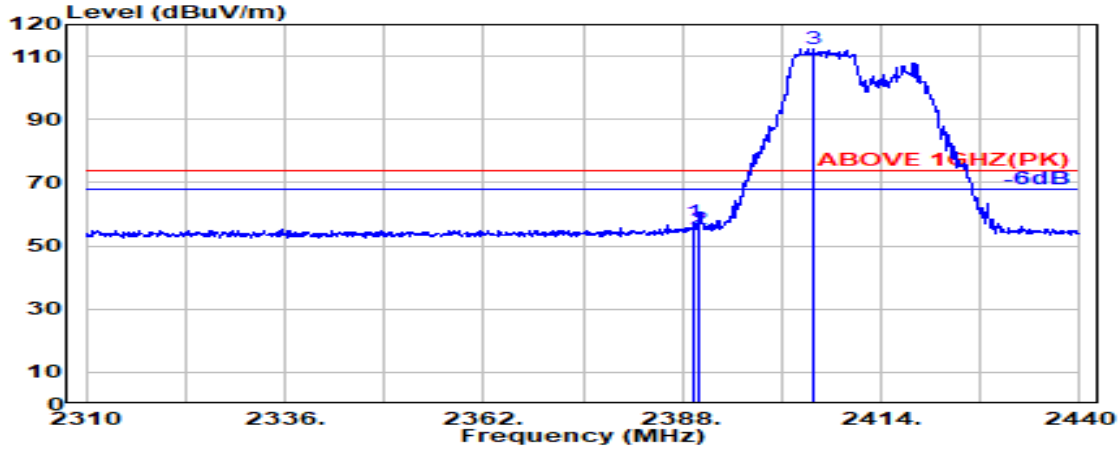

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	63.46	57.45	74.00	16.55	Peak
2390.000	28.14	5.72	39.88	61.45	55.43	74.00	18.57	Peak
@ 2405.100	28.12	5.74	39.88	118.40	112.39	---	---	Peak

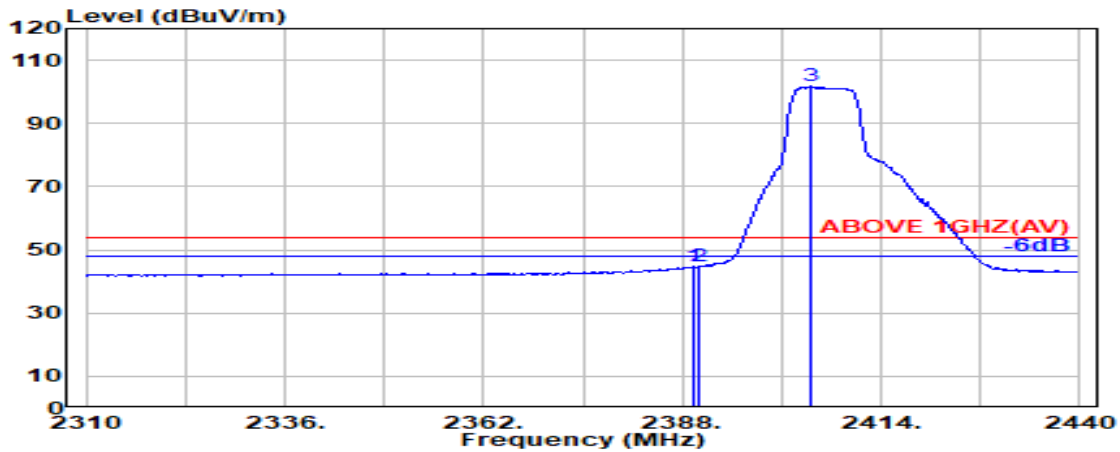


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	50.67	44.65	54.00	9.35	Average
2390.000	28.14	5.72	39.88	50.65	44.63	54.00	9.37	Average
@ 2404.700	28.12	5.74	39.88	107.80	101.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

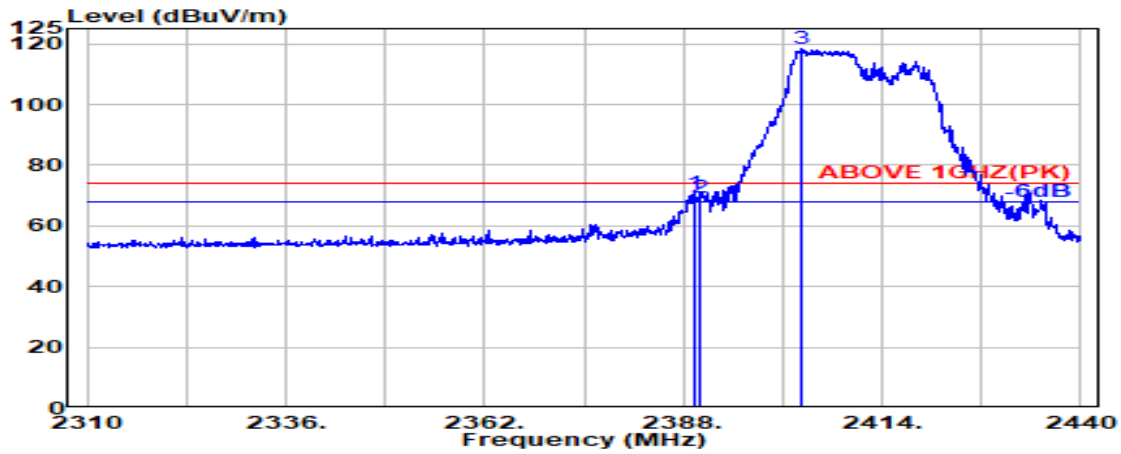

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	76.64	70.63	74.00	3.37	Peak
2390.000	28.14	5.72	39.88	75.14	69.13	74.00	4.87	Peak
@ 2403.600	28.11	5.74	39.88	124.58	118.55	---	---	Peak

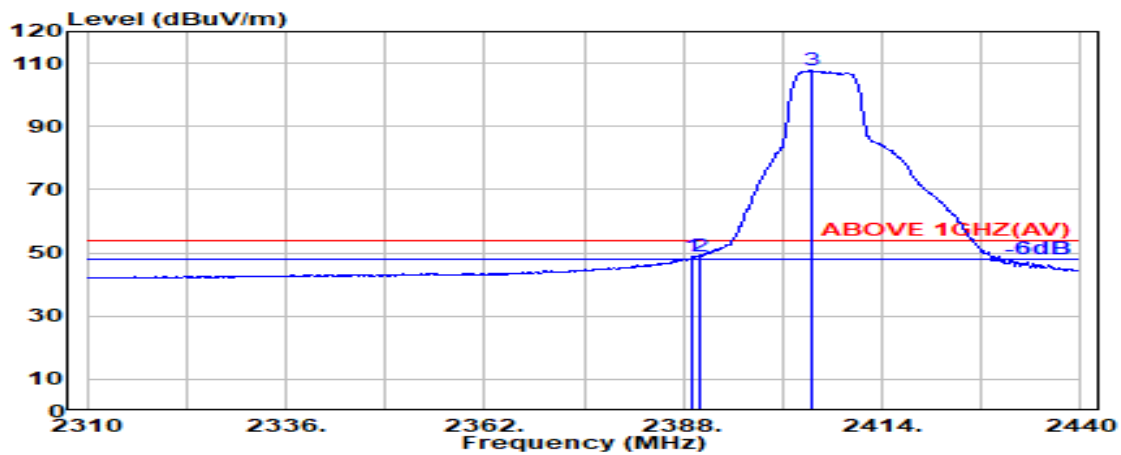


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	55.04	49.02	54.00	4.98	Average
2390.000	28.14	5.72	39.88	54.78	48.76	54.00	5.24	Average
@ 2404.800	28.12	5.74	39.88	113.68	107.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

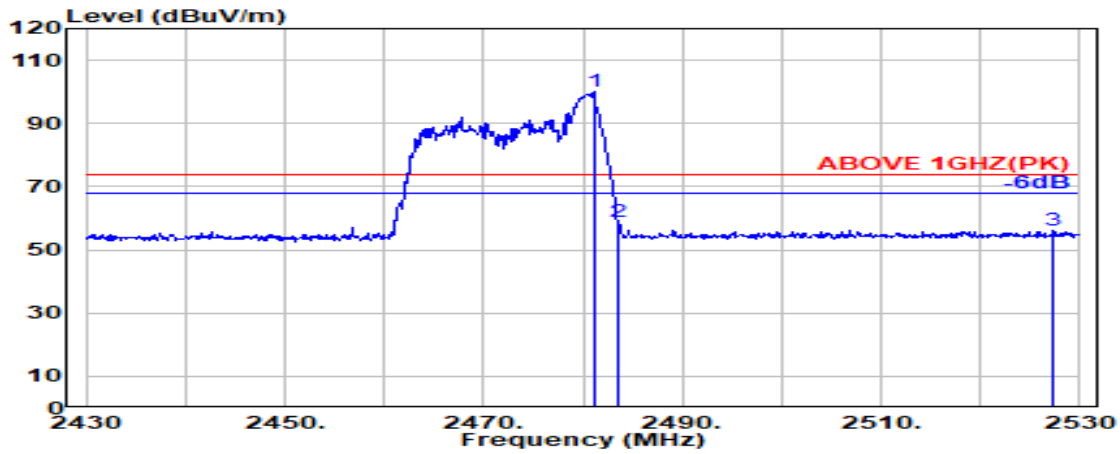

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2481.100	28.36	5.83	39.87	105.77	100.09	---	---	Peak
2483.500	28.37	5.83	39.87	64.55	58.87	74.00	15.13	Peak
2527.300	28.56	5.88	39.88	61.69	56.26	74.00	17.74	Peak

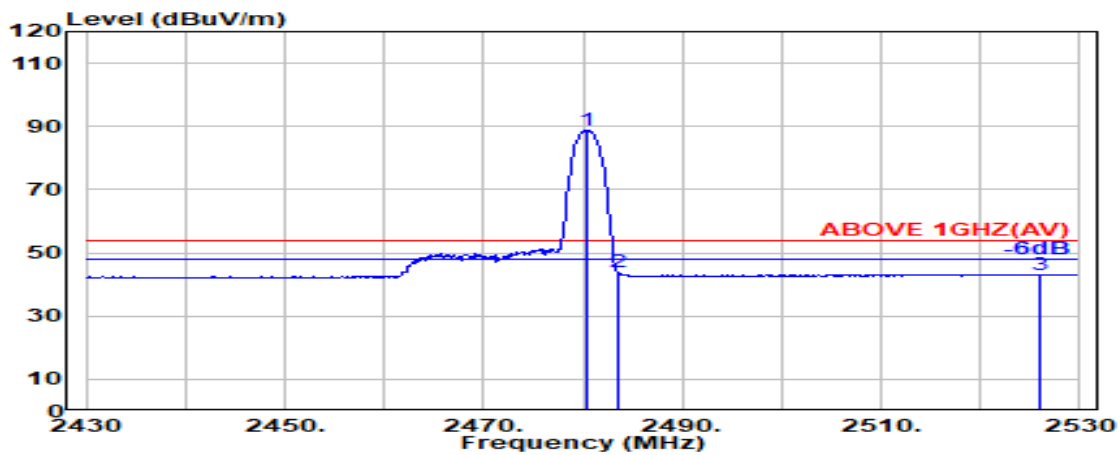

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.36	5.83	39.87	94.59	88.91	---	---	Average
2483.500	28.37	5.83	39.87	49.60	43.93	54.00	10.07	Average
2526.000	28.56	5.88	39.88	48.64	43.20	54.00	10.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.36	5.83	39.87	112.12	106.44	---	---	Peak
2483.500	28.37	5.83	39.87	69.69	64.02	74.00	9.98	Peak
2484.500	28.37	5.83	39.87	62.23	56.56	74.00	17.44	Peak

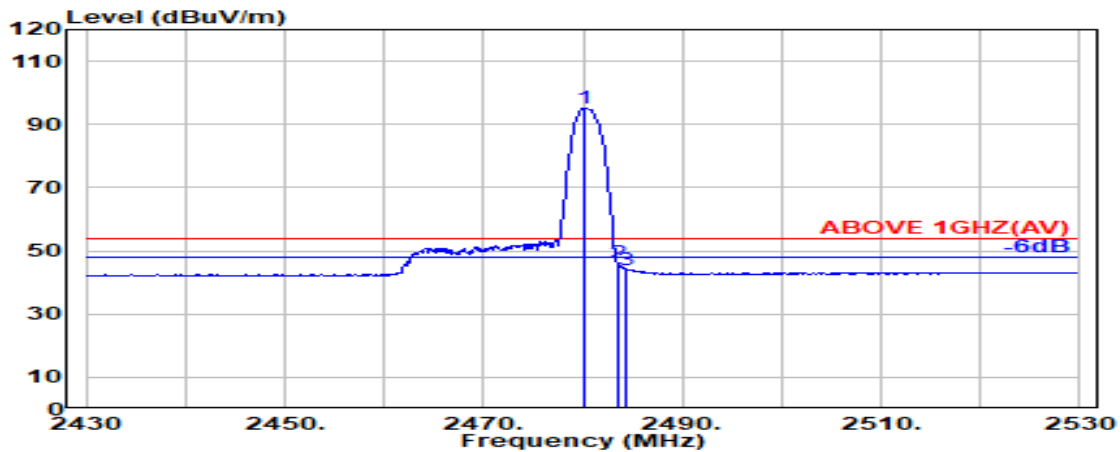


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.36	5.83	39.87	100.92	95.24	---	---	Average
2483.500	28.37	5.83	39.87	51.85	46.18	54.00	7.82	Average
2484.400	28.37	5.83	39.87	49.63	43.96	54.00	10.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

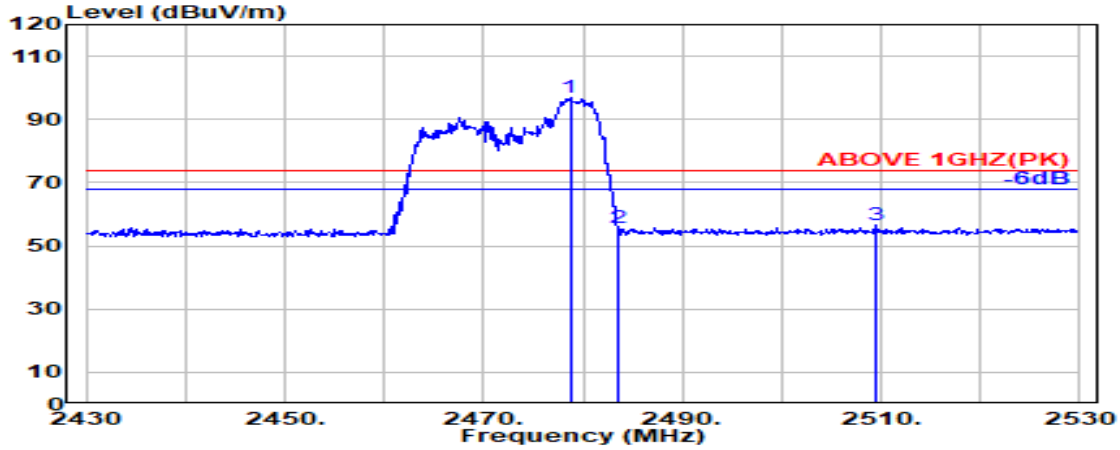

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.36	5.83	39.87	102.61	96.92	---	---	Peak
2483.500	28.37	5.83	39.87	61.41	55.74	74.00	18.26	Peak
2509.600	28.46	5.86	39.87	62.14	56.59	74.00	17.41	Peak

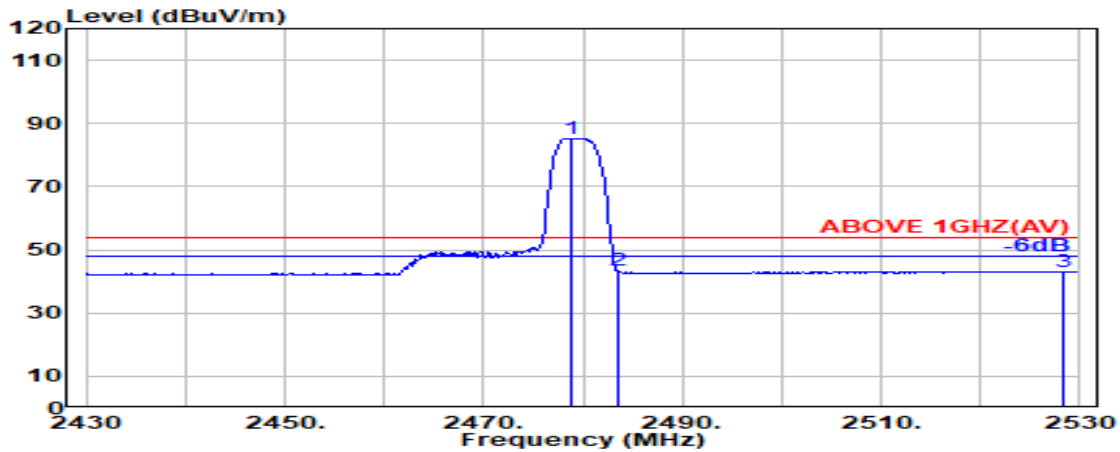


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.36	5.83	39.87	91.03	85.34	---	---	Average
2483.500	28.37	5.83	39.87	49.15	43.48	54.00	10.52	Average
2528.400	28.57	5.88	39.88	48.59	43.17	54.00	10.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

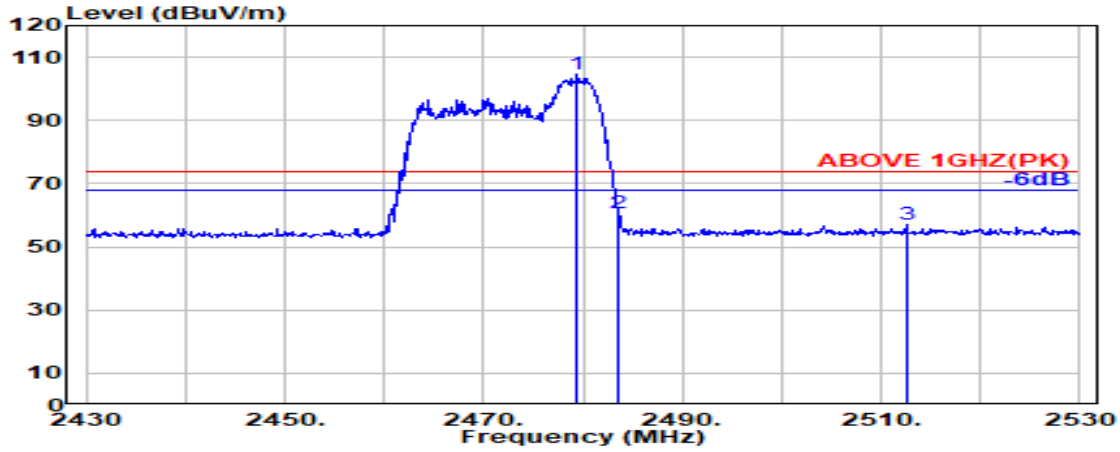

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.36	5.83	39.87	110.43	104.75	---	---	Peak
2483.500	28.37	5.83	39.87	66.48	60.81	74.00	13.19	Peak
2512.500	28.48	5.87	39.87	62.45	56.91	74.00	17.09	Peak

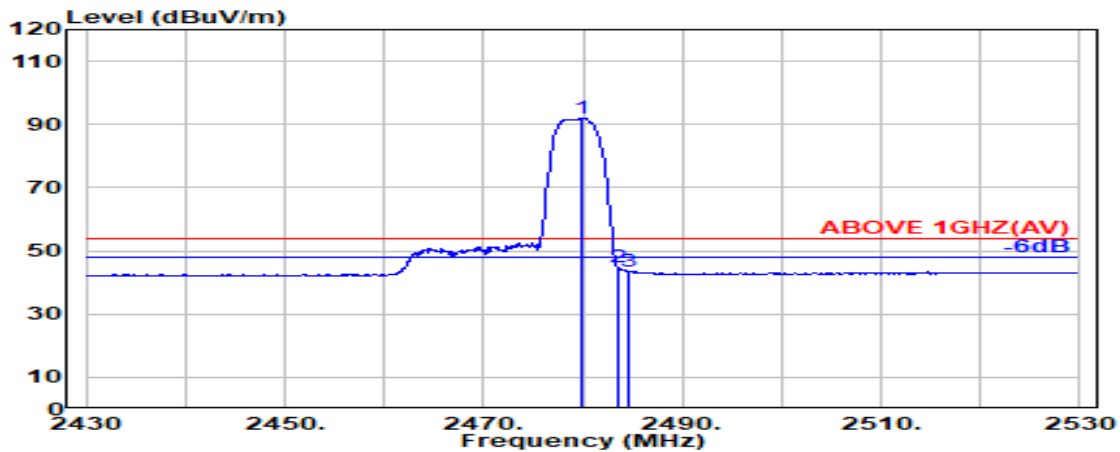


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	28.36	5.83	39.87	97.65	91.96	---	---	Average
2483.500	28.37	5.83	39.87	50.72	45.05	54.00	8.95	Average
2484.500	28.37	5.83	39.87	49.26	43.59	54.00	10.41	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

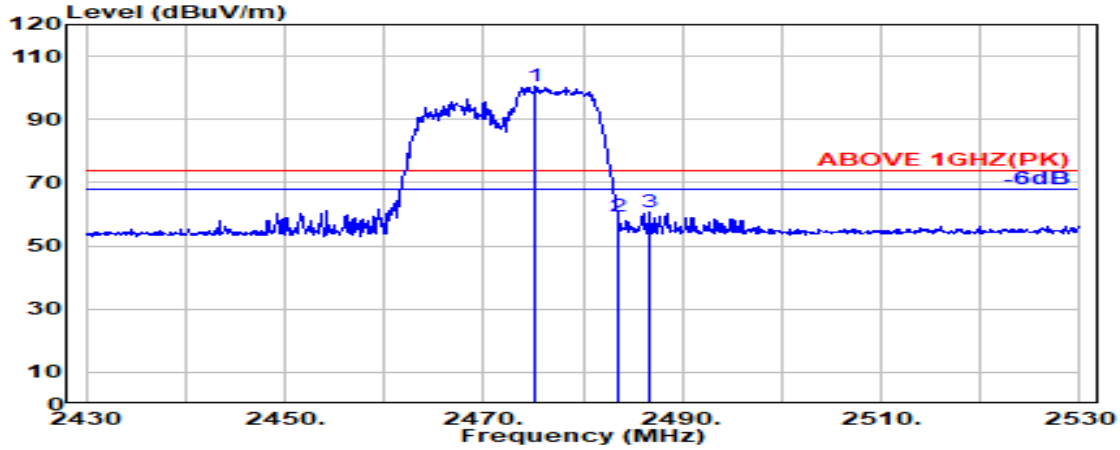

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.200	28.35	5.82	39.87	106.17	100.47	---	---	Peak
2483.500	28.37	5.83	39.87	64.83	59.16	74.00	14.84	Peak
2486.600	28.37	5.83	39.87	66.12	60.45	74.00	13.55	Peak

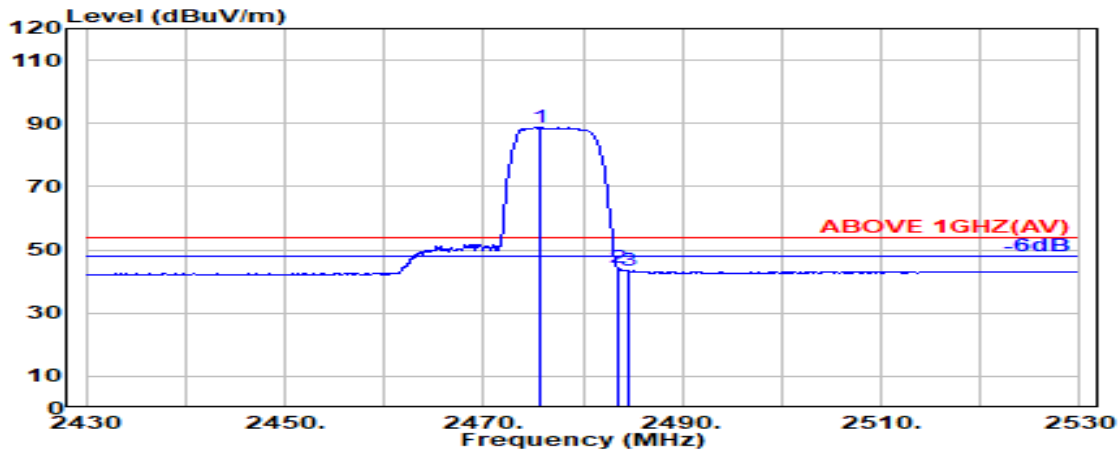


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.800	28.35	5.82	39.87	94.37	88.67	---	---	Average
2483.500	28.37	5.83	39.87	50.11	44.44	54.00	9.56	Average
2484.500	28.37	5.83	39.87	49.03	43.36	54.00	10.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

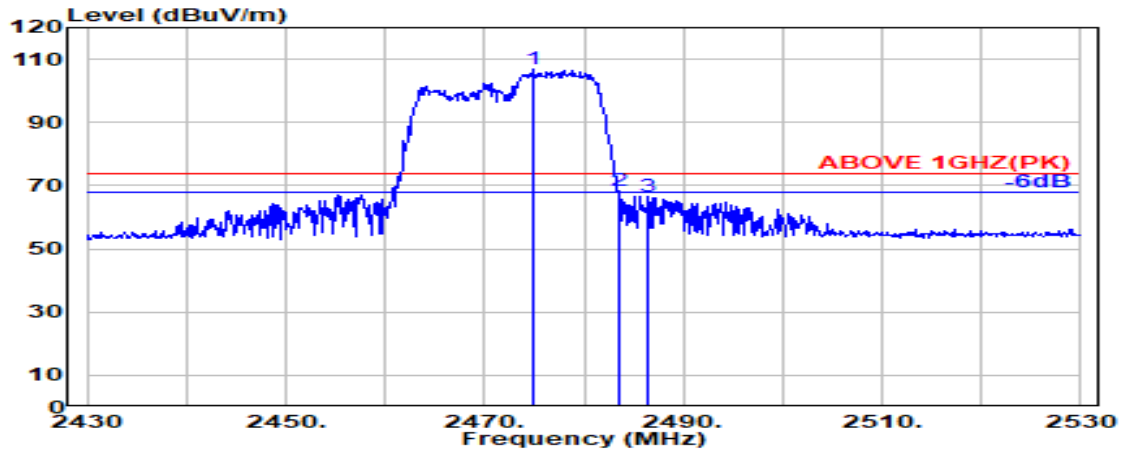

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.900	28.35	5.82	39.87	112.43	106.73	---	---	Peak
2483.500	28.37	5.83	39.87	74.01	68.34	74.00	5.66	Peak
2486.400	28.37	5.83	39.87	72.17	66.51	74.00	7.49	Peak

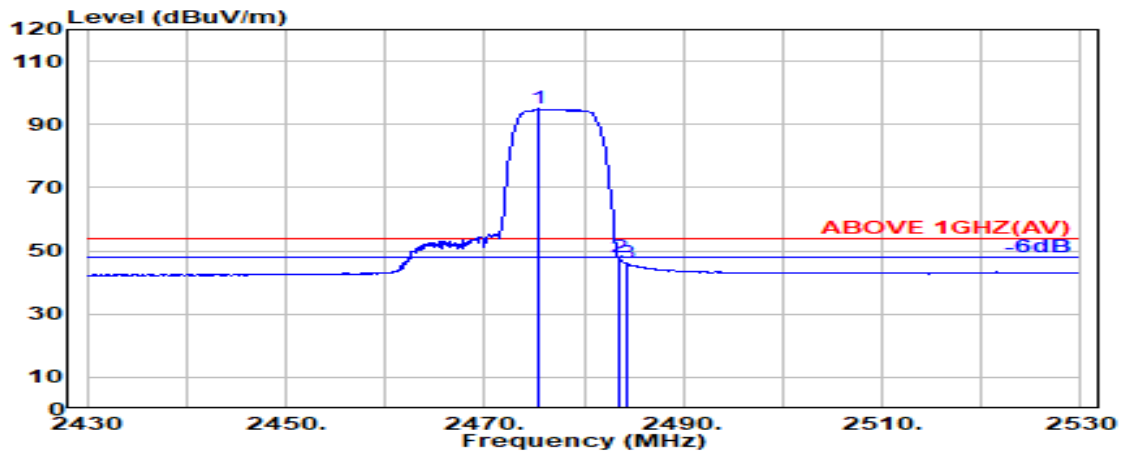


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.500	28.35	5.82	39.87	100.59	94.89	---	---	Average
2483.500	28.37	5.83	39.87	53.78	48.11	54.00	5.89	Average
2484.400	28.37	5.83	39.87	51.69	46.02	54.00	7.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

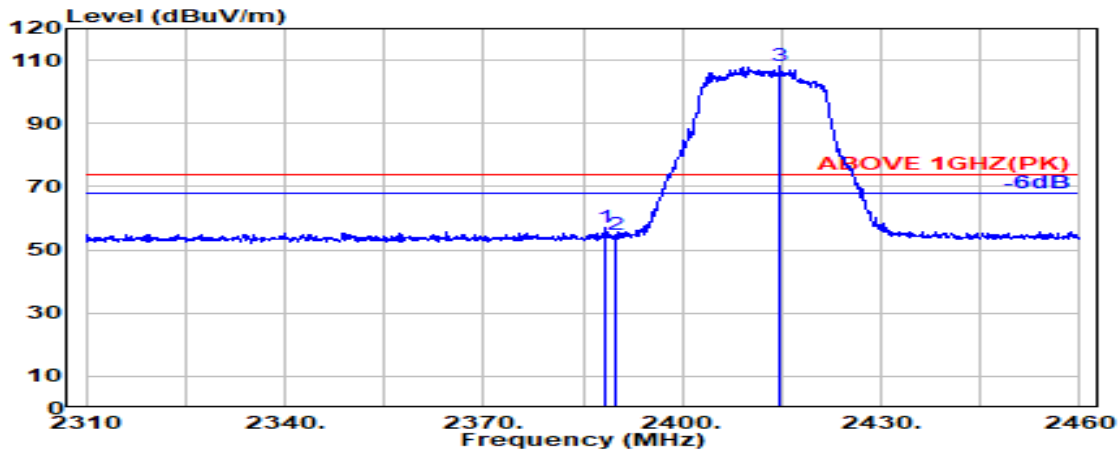

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.15	5.72	39.88	62.88	56.87	74.00	17.13	Peak
2390.000	28.14	5.72	39.88	60.82	54.80	74.00	19.20	Peak
@ 2414.600	28.16	5.75	39.88	114.19	108.22	---	---	Peak

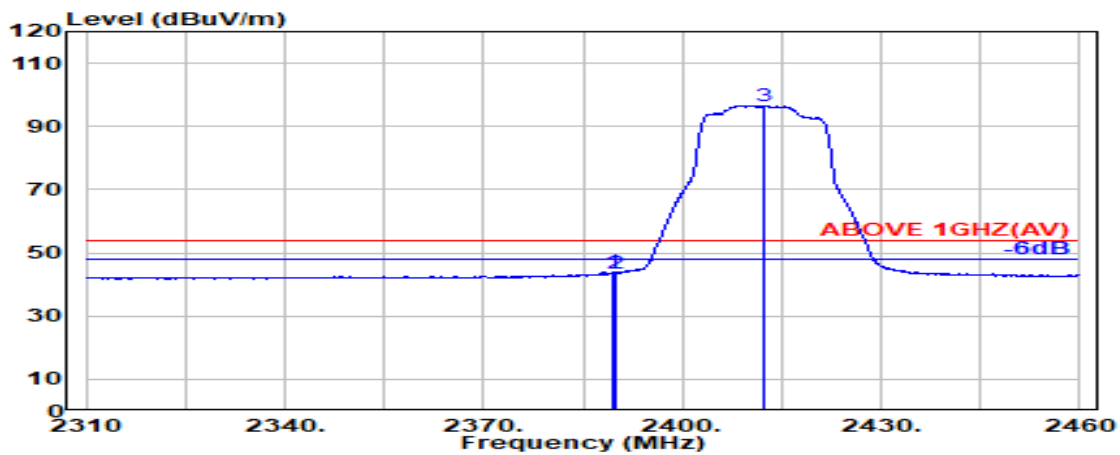


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	49.92	43.91	54.00	10.09	Average
2390.000	28.14	5.72	39.88	49.67	43.65	54.00	10.35	Average
@ 2412.300	28.15	5.75	39.88	102.54	96.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

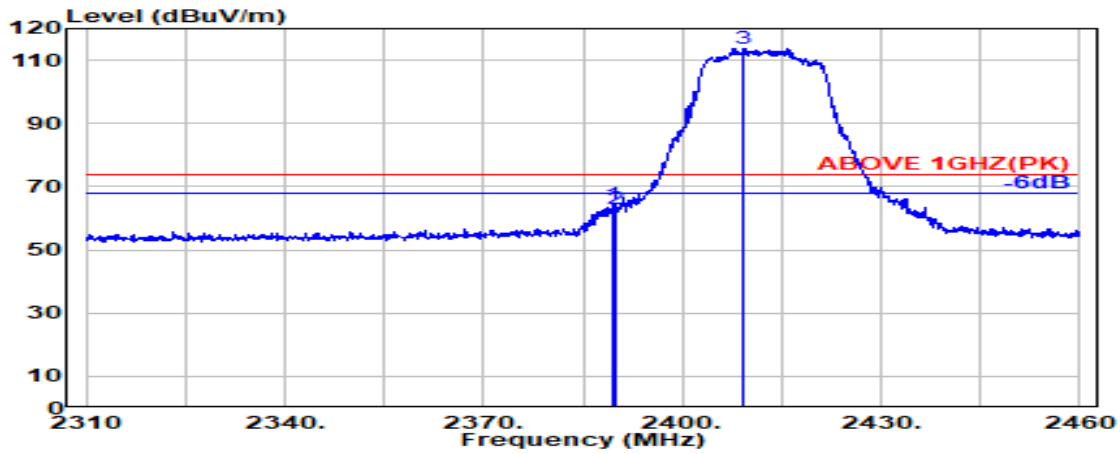

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	70.15	64.13	74.00	9.87	Peak
2390.000	28.14	5.72	39.88	68.74	62.73	74.00	11.27	Peak
@ 2409.200	28.14	5.74	39.88	119.78	113.78	---	---	Peak

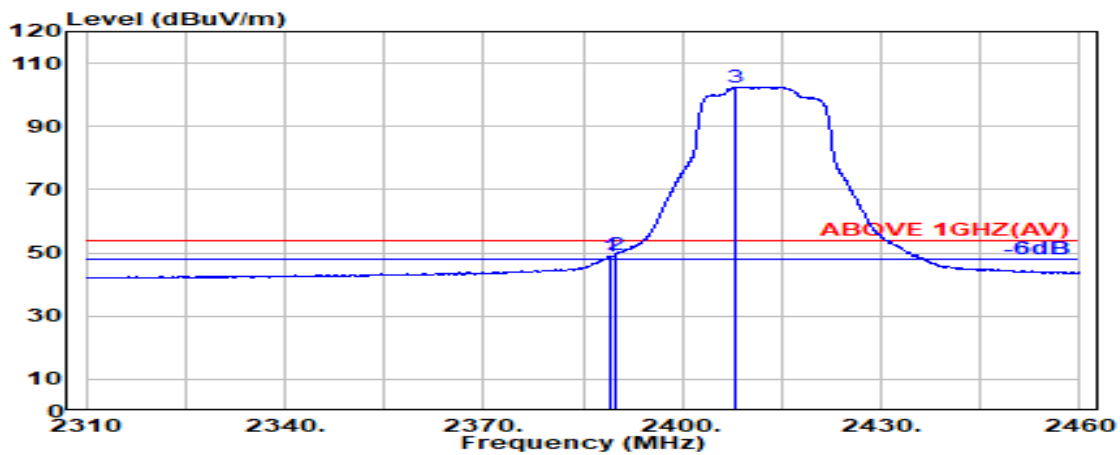


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.88	55.09	49.08	54.00	4.92	Average
2390.000	28.14	5.72	39.88	55.47	49.46	54.00	4.54	Average
@ 2407.900	28.13	5.74	39.88	108.57	102.56	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

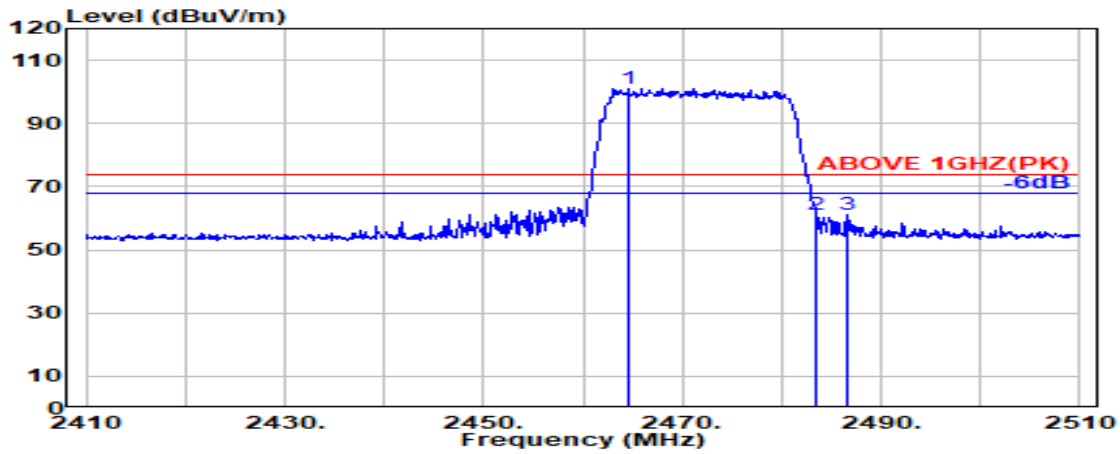

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.600	28.33	5.81	39.87	106.91	101.18	---	---	Peak
2483.500	28.37	5.83	39.87	66.86	61.19	74.00	12.81	Peak
2486.500	28.37	5.83	39.87	66.61	60.95	74.00	13.05	Peak

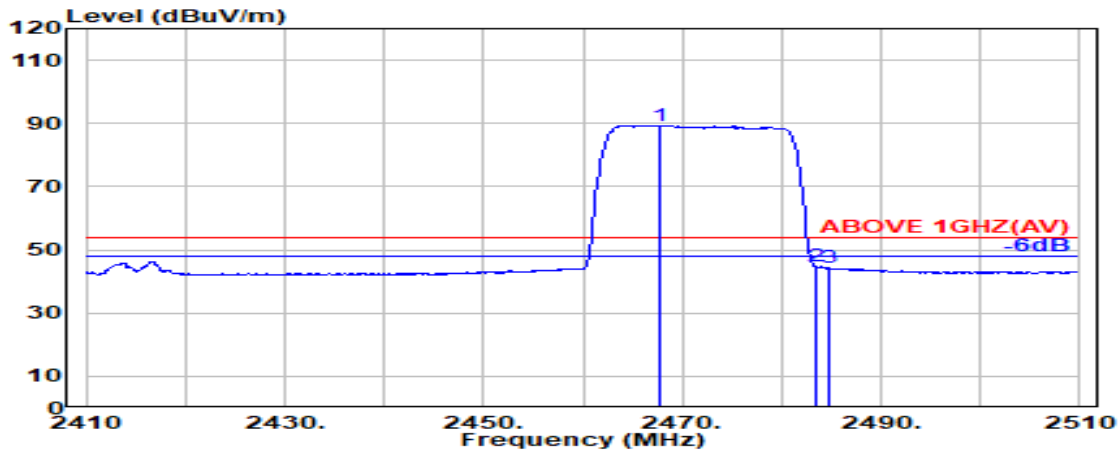


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.800	28.34	5.81	39.87	95.08	89.36	---	---	Average
2483.500	28.37	5.83	39.87	50.48	44.80	54.00	9.20	Average
2484.800	28.37	5.83	39.87	49.87	44.20	54.00	9.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

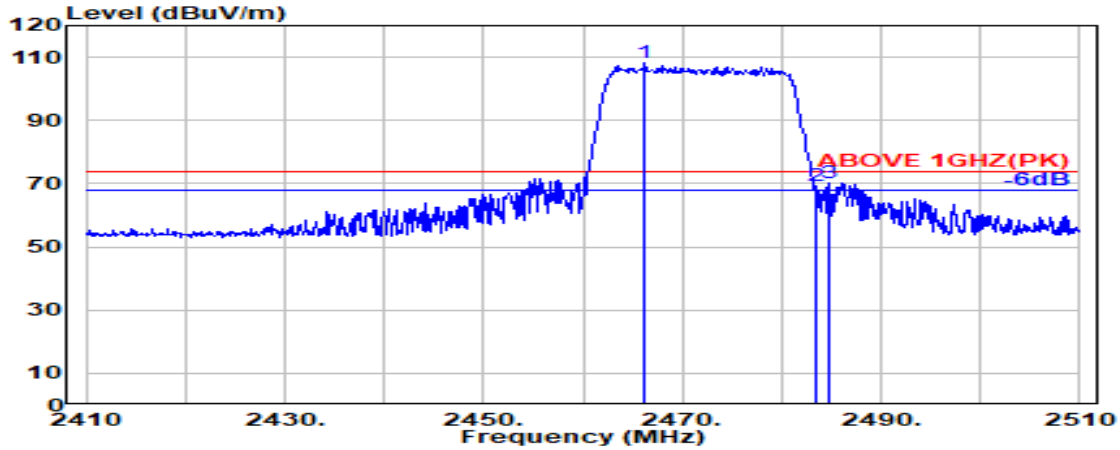

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.33	5.81	39.87	113.83	108.11	---	---	Peak
2483.500	28.37	5.83	39.87	75.10	69.43	74.00	4.57	Peak
2484.700	28.37	5.83	39.87	76.01	70.34	74.00	3.66	Peak

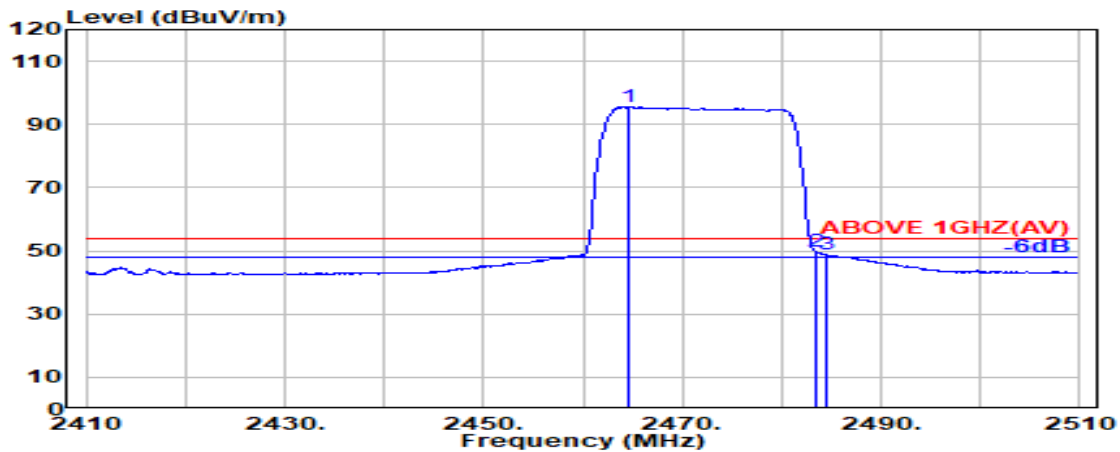


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.600	28.33	5.81	39.87	101.34	95.60	---	---	Average
2483.500	28.37	5.83	39.87	55.35	49.68	54.00	4.32	Average
2484.500	28.37	5.83	39.87	54.54	48.87	54.00	5.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
		RU Configuration	26/0

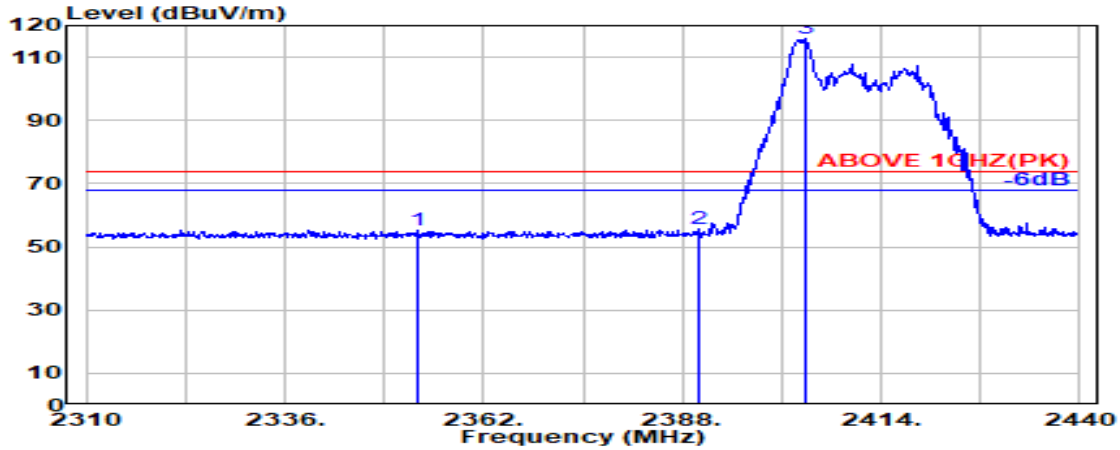

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2353.300	28.29	5.68	39.88	61.20	55.28	74.00	18.72	Peak
2390.000	28.14	5.72	39.88	61.53	55.51	74.00	18.49	Peak
@ 2404.000	28.12	5.74	39.88	121.78	115.76	---	---	Peak

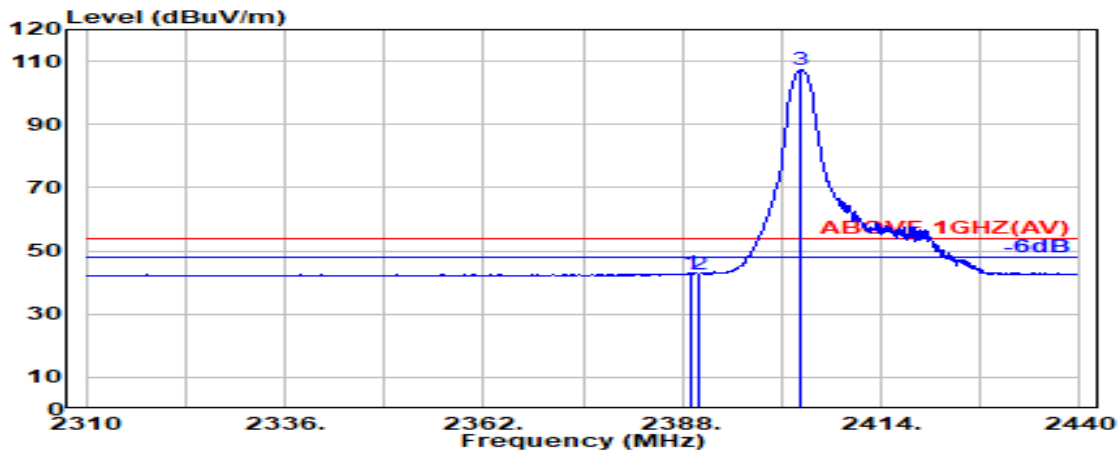


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.88	48.89	42.88	54.00	11.12	Average
2390.000	28.14	5.72	39.88	48.69	42.67	54.00	11.33	Average
@ 2403.600	28.11	5.74	39.88	113.24	107.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
		RU Configuration	26/0

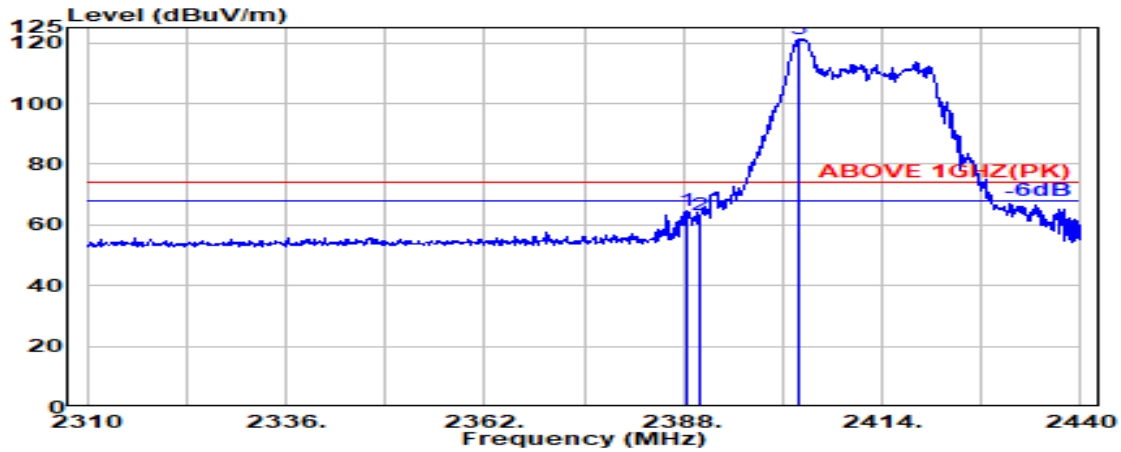

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.15	5.72	39.88	70.53	64.52	74.00	9.48	Peak
2390.000	28.14	5.72	39.88	69.21	63.20	74.00	10.80	Peak
@ 2403.200	28.11	5.74	39.88	127.35	121.33	---	---	Peak

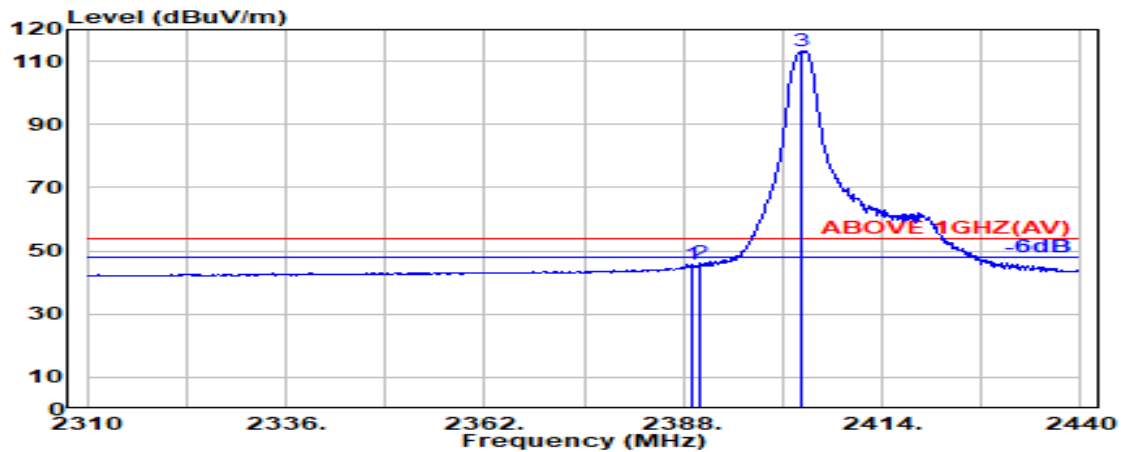


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	51.94	45.92	54.00	8.08	Average
2390.000	28.14	5.72	39.88	51.98	45.97	54.00	8.03	Average
@ 2403.500	28.11	5.74	39.88	119.26	113.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
		RU Configuration	52/37

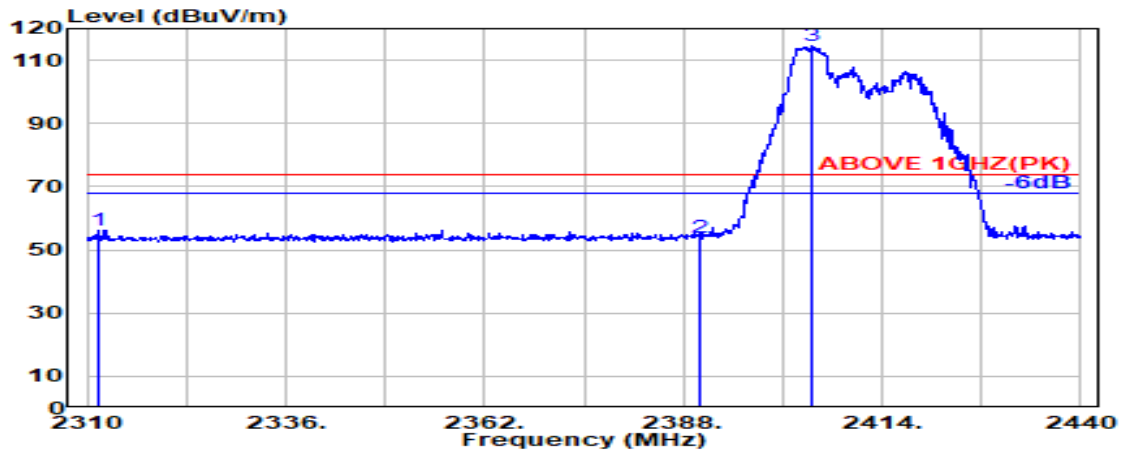

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2311.600	28.07	5.63	39.88	62.51	56.32	74.00	17.68	Peak
2390.000	28.14	5.72	39.88	60.01	53.99	74.00	20.01	Peak
@ 2404.900	28.12	5.74	39.88	120.47	114.45	---	---	Peak

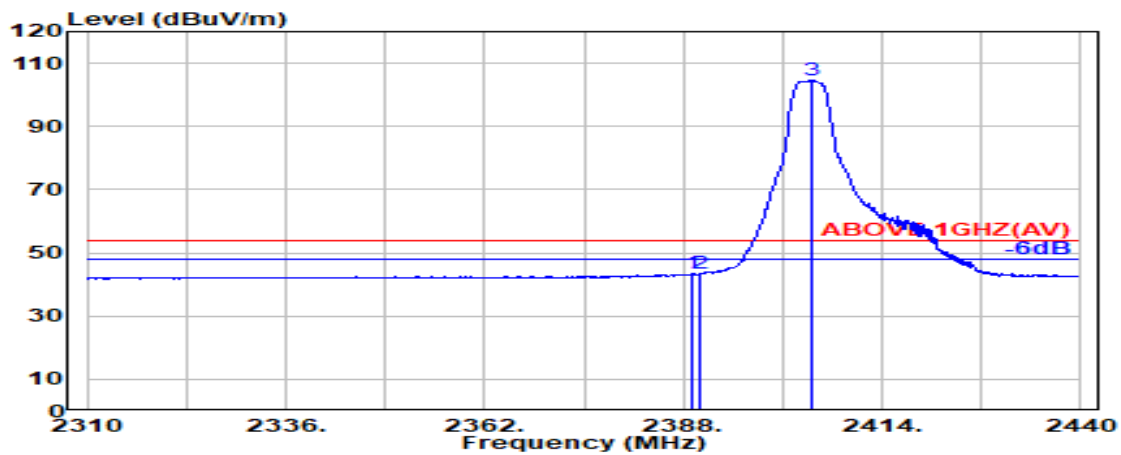


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	49.41	43.39	54.00	10.61	Average
2390.000	28.14	5.72	39.88	49.38	43.36	54.00	10.64	Average
@ 2404.800	28.12	5.74	39.88	110.47	104.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
		RU Configuration	52/37

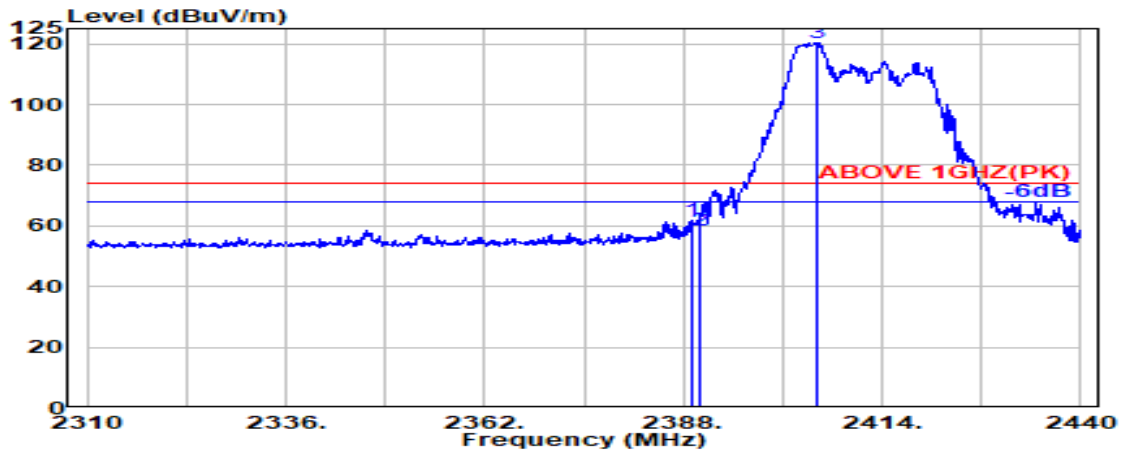

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	67.59	61.58	74.00	12.42	Peak
2390.000	28.14	5.72	39.88	64.35	58.34	74.00	15.66	Peak
@ 2405.500	28.12	5.74	39.88	126.29	120.28	---	---	Peak

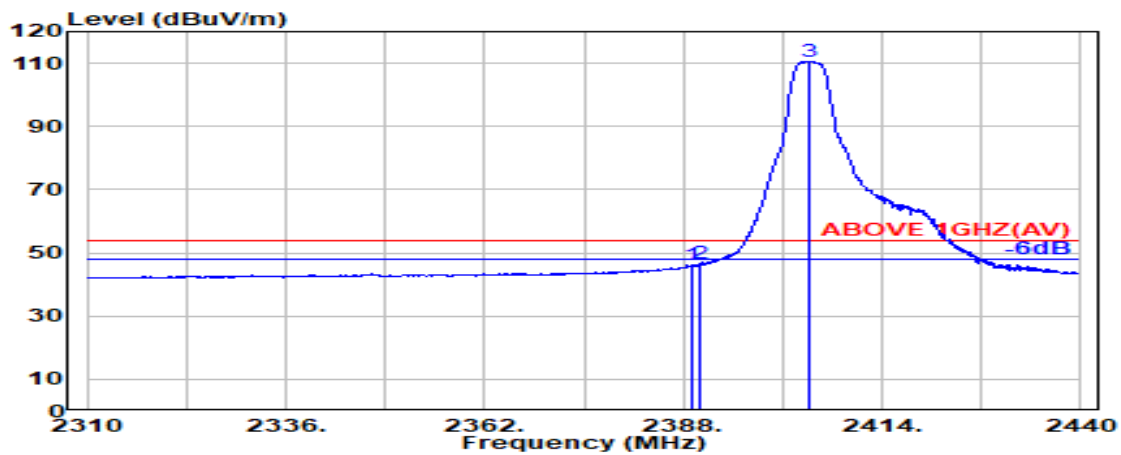


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	52.28	46.26	54.00	7.74	Average
2390.000	28.14	5.72	39.88	52.71	46.69	54.00	7.31	Average
@ 2404.600	28.12	5.74	39.88	116.53	110.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
		RU Configuration	106/53

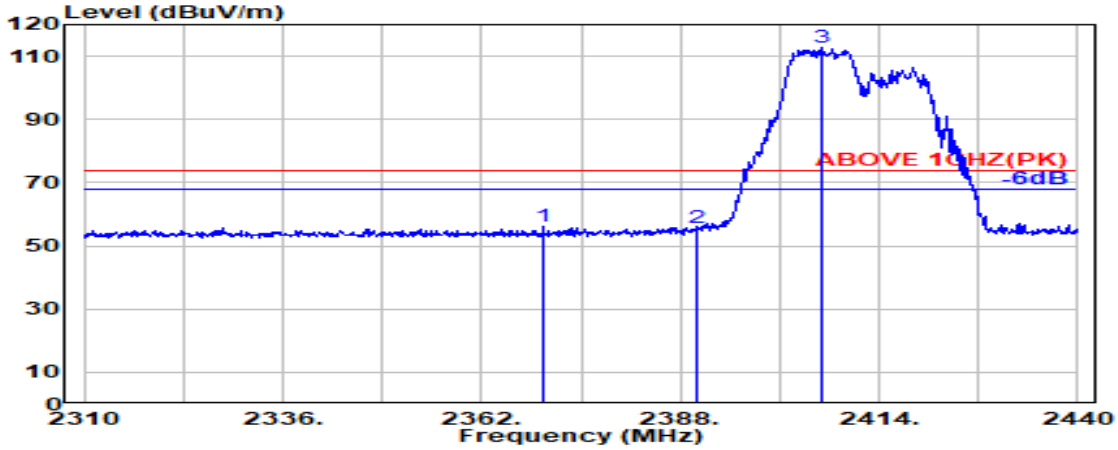

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.000	28.22	5.70	39.88	62.12	56.16	74.00	17.84	Peak
2390.000	28.14	5.72	39.88	61.66	55.64	74.00	18.36	Peak
@ 2406.500	28.13	5.74	39.88	118.91	112.90	---	---	Peak

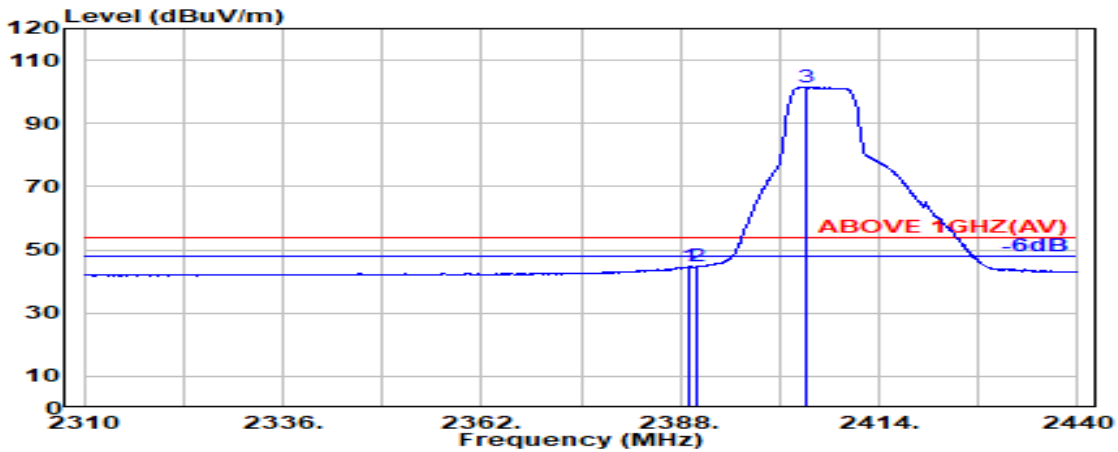


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	50.76	44.75	54.00	9.25	Average
2390.000	28.14	5.72	39.88	50.74	44.72	54.00	9.28	Average
@ 2404.600	28.12	5.74	39.88	107.57	101.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
		RU Configuration	106/53

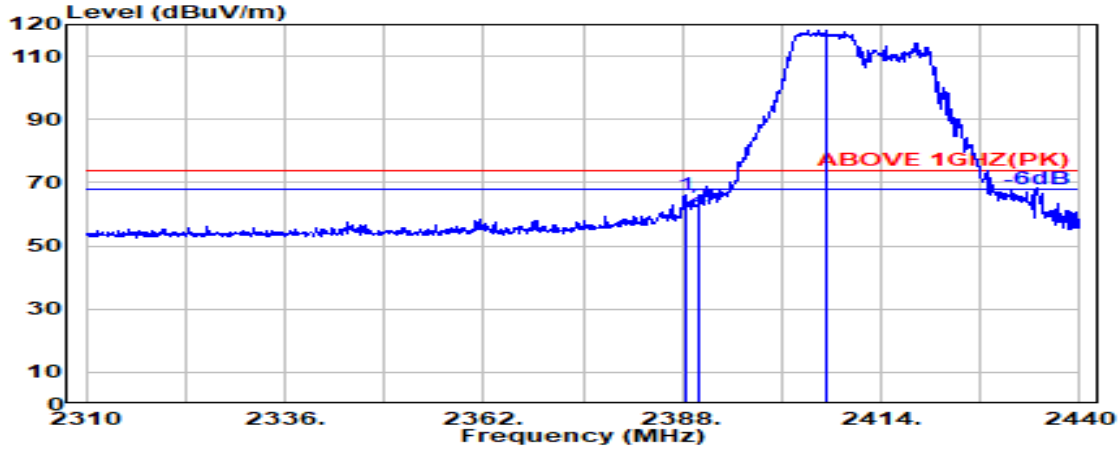

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.15	5.72	39.88	72.25	66.23	74.00	7.77	Peak
2390.000	28.14	5.72	39.88	68.38	62.37	74.00	11.63	Peak
@ 2406.800	28.13	5.74	39.88	124.34	118.33	---	---	Peak

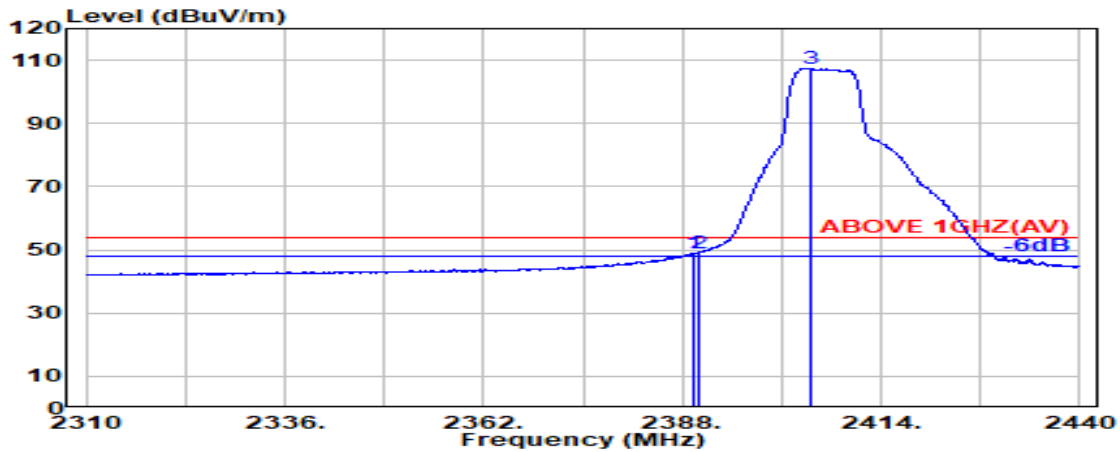


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	55.00	48.99	54.00	5.01	Average
2390.000	28.14	5.72	39.88	55.10	49.08	54.00	4.92	Average
@ 2404.800	28.12	5.74	39.88	113.54	107.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
		RU Configuration	26/8

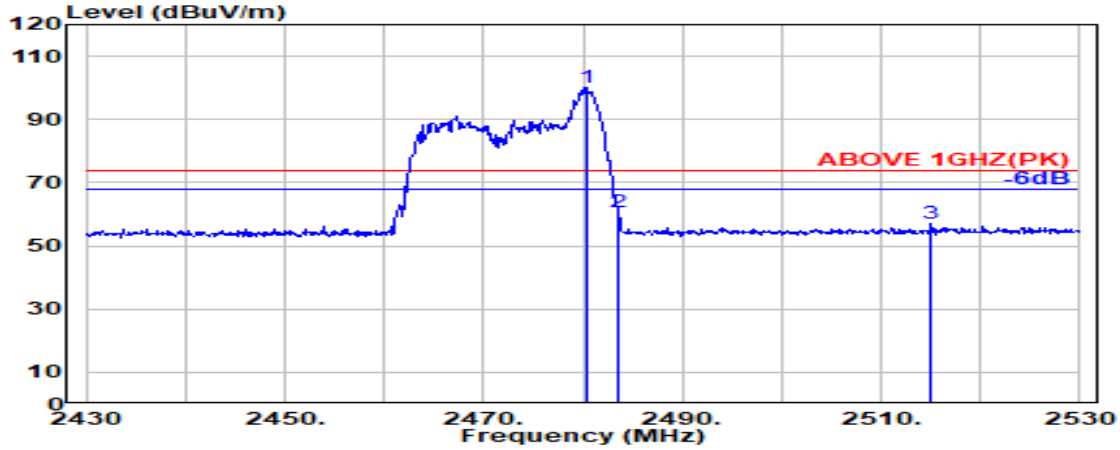

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.36	5.83	39.87	105.62	99.93	---	---	Peak
2483.500	28.37	5.83	39.87	66.24	60.56	74.00	13.44	Peak
2515.100	28.49	5.87	39.87	62.47	56.96	74.00	17.04	Peak

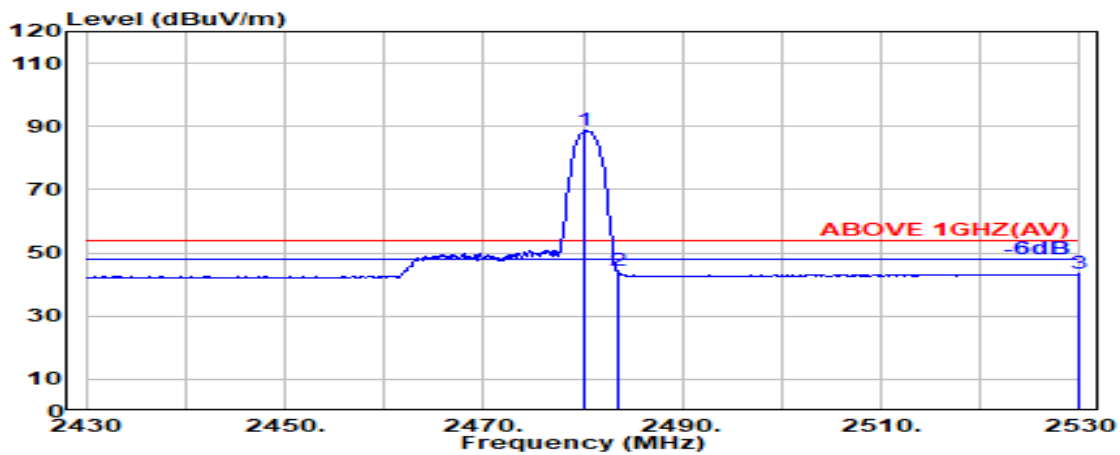


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.36	5.83	39.87	94.26	88.57	---	---	Average
2483.500	28.37	5.83	39.87	49.93	44.26	54.00	9.74	Average
2529.900	28.58	5.89	39.88	48.70	43.29	54.00	10.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
		RU Configuration	26/8

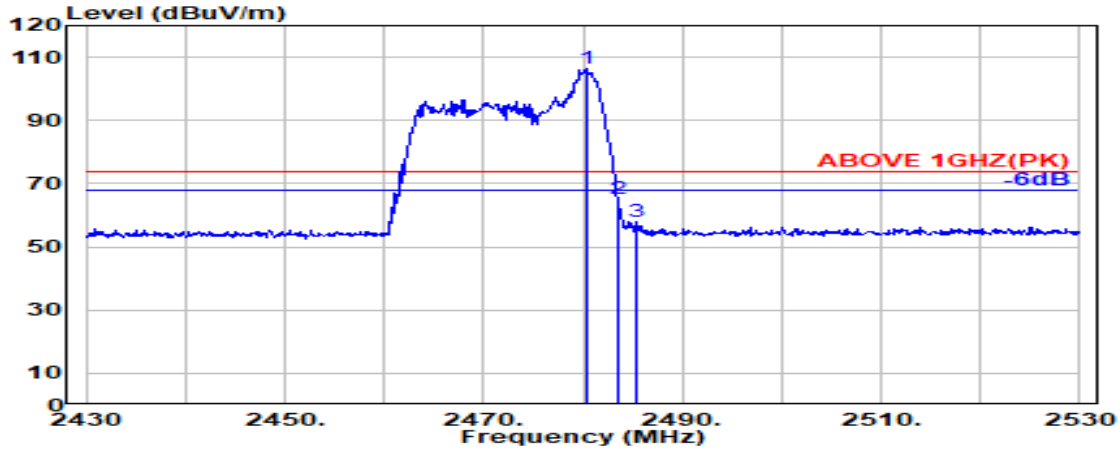

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.36	5.83	39.87	112.09	106.41	---	---	Peak
2483.500	28.37	5.83	39.87	70.68	65.00	74.00	9.00	Peak
2485.400	28.37	5.83	39.87	63.68	58.01	74.00	15.99	Peak

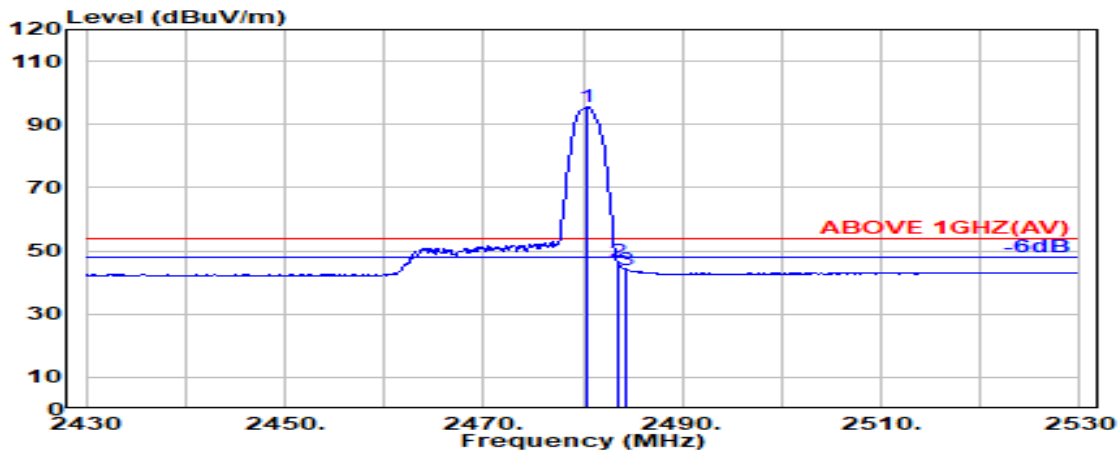


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.36	5.83	39.87	101.45	95.77	---	---	Average
2483.500	28.37	5.83	39.87	52.13	46.45	54.00	7.55	Average
2484.400	28.37	5.83	39.87	49.62	43.95	54.00	10.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
		RU Configuration	52/40

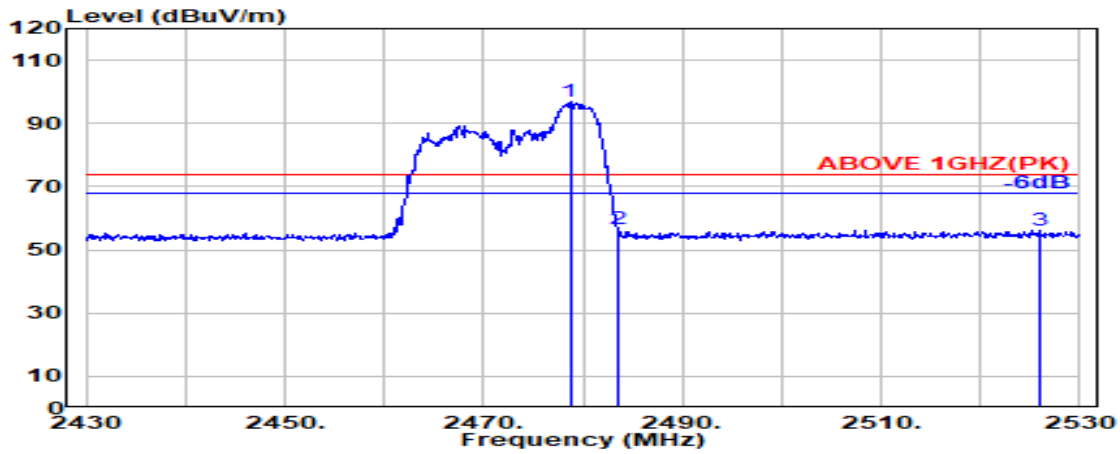

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.36	5.83	39.87	102.37	96.68	---	---	Peak
2483.500	28.37	5.83	39.87	62.48	56.81	74.00	17.19	Peak
2526.000	28.56	5.88	39.88	61.80	56.36	74.00	17.64	Peak

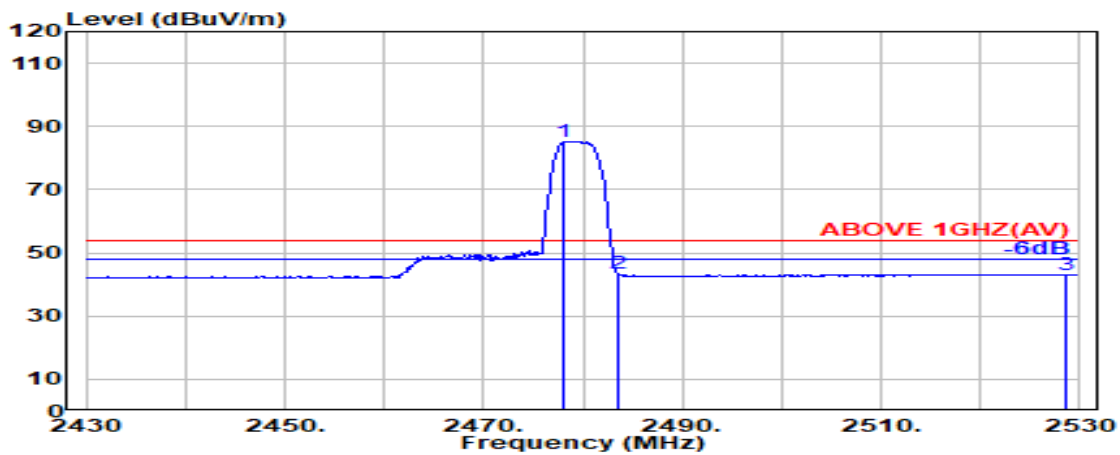


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.100	28.36	5.82	39.87	90.93	85.24	---	---	Average
2483.500	28.37	5.83	39.87	49.25	43.58	54.00	10.42	Average
2528.600	28.57	5.88	39.88	48.60	43.17	54.00	10.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
		RU Configuration	52/40

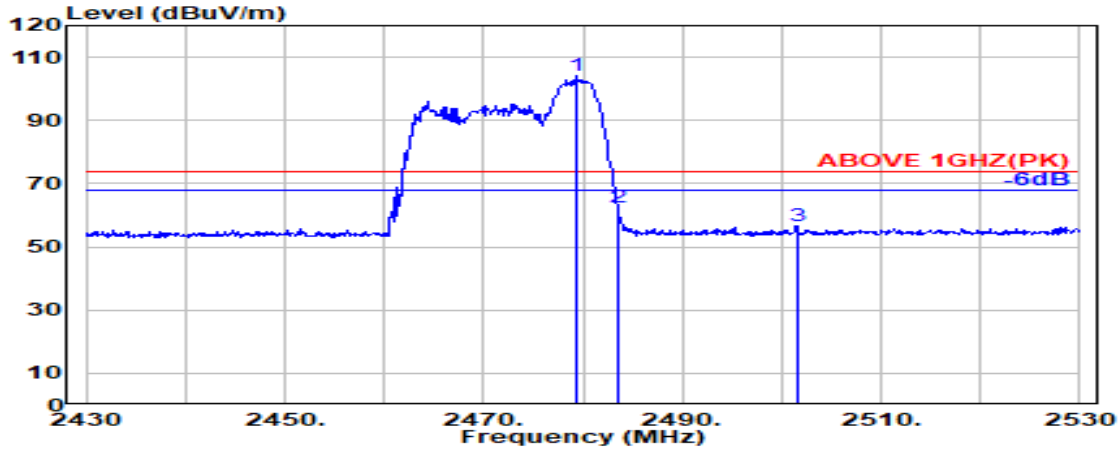

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.36	5.83	39.87	109.61	103.93	---	---	Peak
2483.500	28.37	5.83	39.87	68.28	62.61	74.00	11.39	Peak
2501.500	28.41	5.85	39.87	62.36	56.75	74.00	17.25	Peak

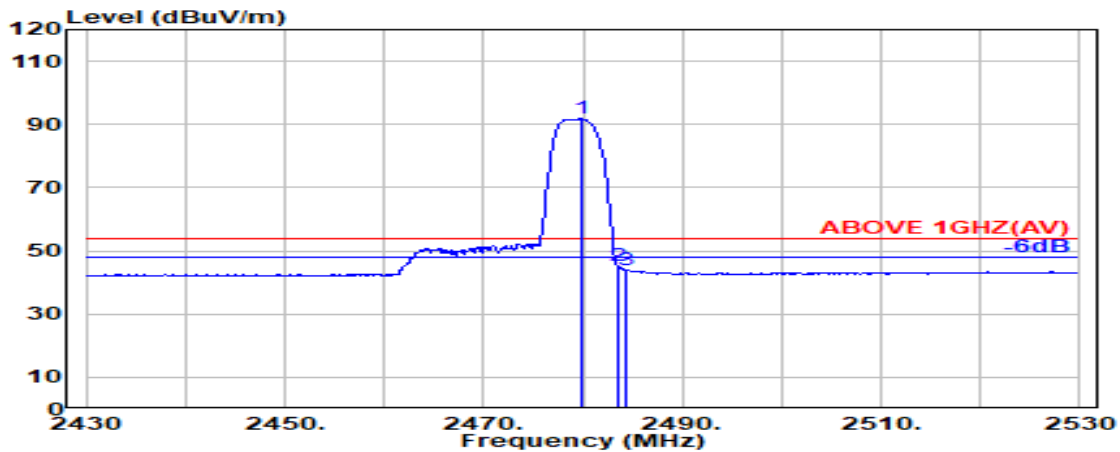


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.36	5.83	39.87	97.42	91.74	---	---	Average
2483.500	28.37	5.83	39.87	50.92	45.25	54.00	8.75	Average
2484.400	28.37	5.83	39.87	49.60	43.93	54.00	10.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
		RU Configuration	106/54

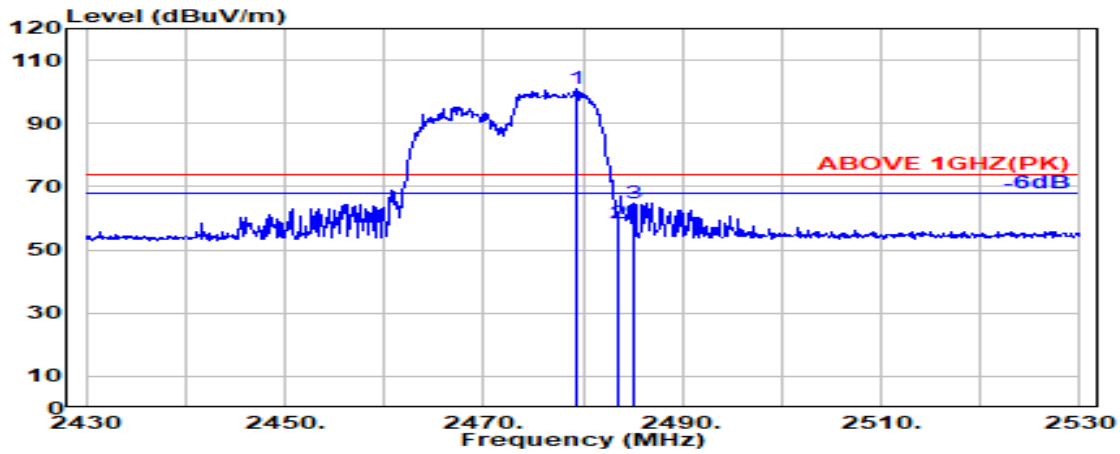

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.36	5.83	39.87	106.47	100.78	---	---	Peak
2483.500	28.37	5.83	39.87	64.05	58.38	74.00	15.62	Peak
2485.200	28.37	5.83	39.87	70.32	64.66	74.00	9.34	Peak

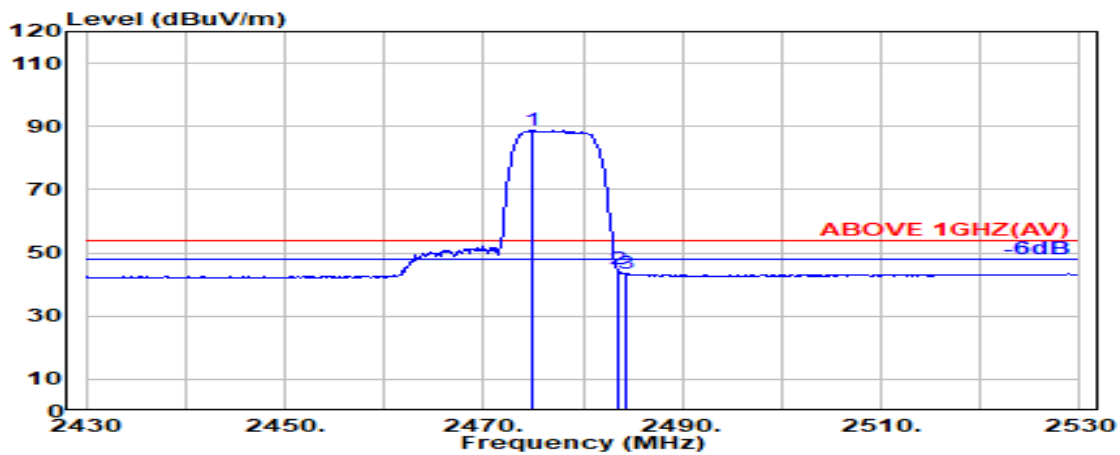


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.800	28.35	5.82	39.87	94.48	88.78	---	---	Average
2483.500	28.37	5.83	39.87	50.31	44.64	54.00	9.36	Average
2484.400	28.37	5.83	39.87	49.05	43.38	54.00	10.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
		RU Configuration	106/54

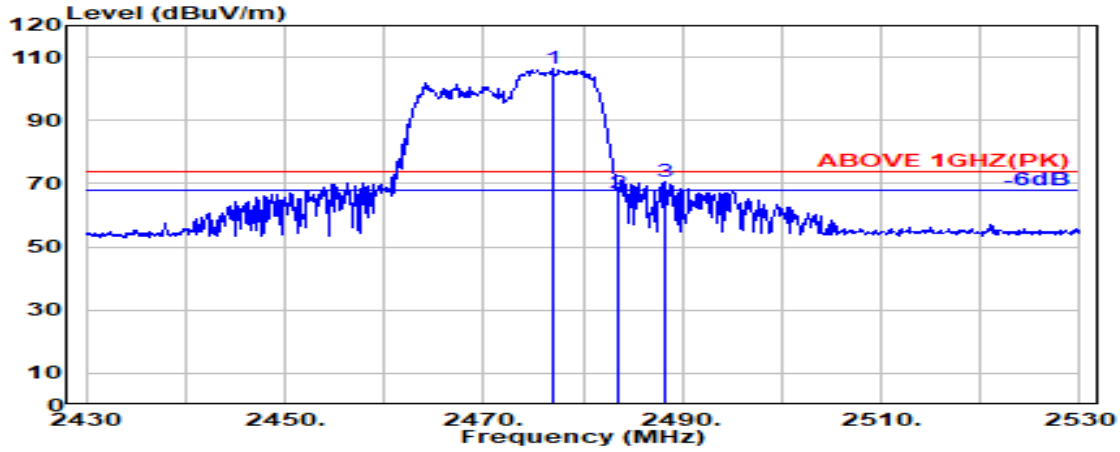

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	28.35	5.82	39.87	112.13	106.44	---	---	Peak
2483.500	28.37	5.83	39.87	72.71	67.03	74.00	6.97	Peak
2488.300	28.38	5.84	39.87	76.16	70.51	74.00	3.49	Peak

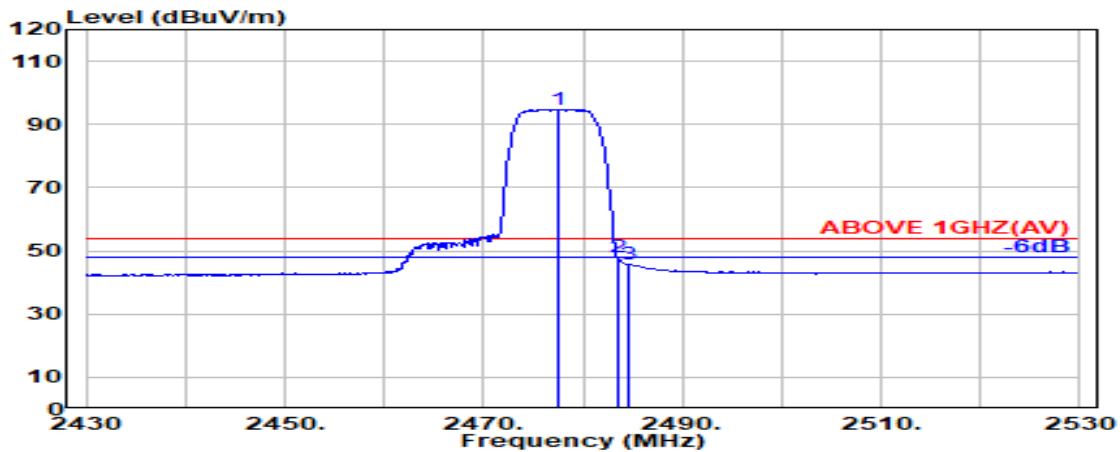


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	28.36	5.82	39.87	100.38	94.69	---	---	Average
2483.500	28.37	5.83	39.87	53.53	47.85	54.00	6.15	Average
2484.600	28.37	5.83	39.87	51.54	45.87	54.00	8.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2422MHz
		RU Configuration	242/61

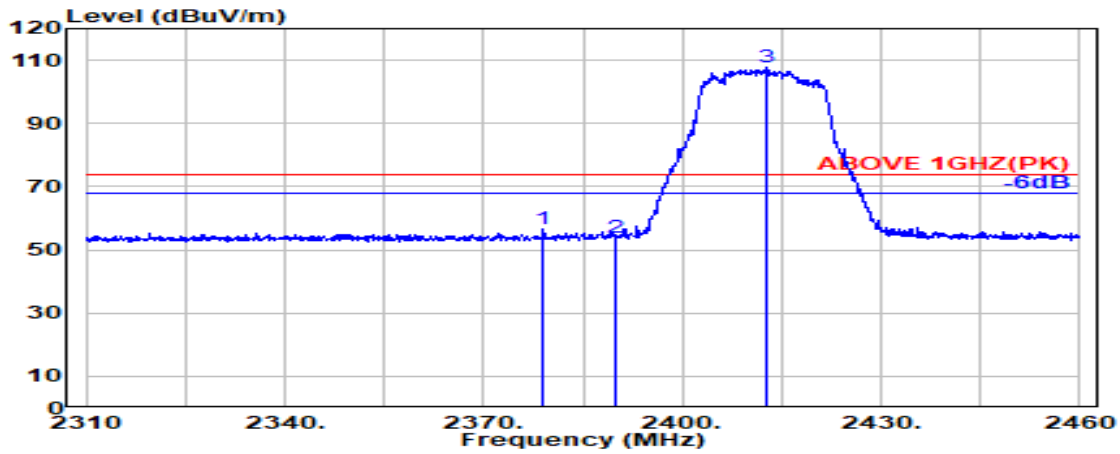

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.100	28.18	5.71	39.88	62.50	56.51	74.00	17.49	Peak
2390.000	28.14	5.72	39.88	59.90	53.88	74.00	20.12	Peak
@ 2412.800	28.15	5.75	39.88	113.55	107.57	---	---	Peak

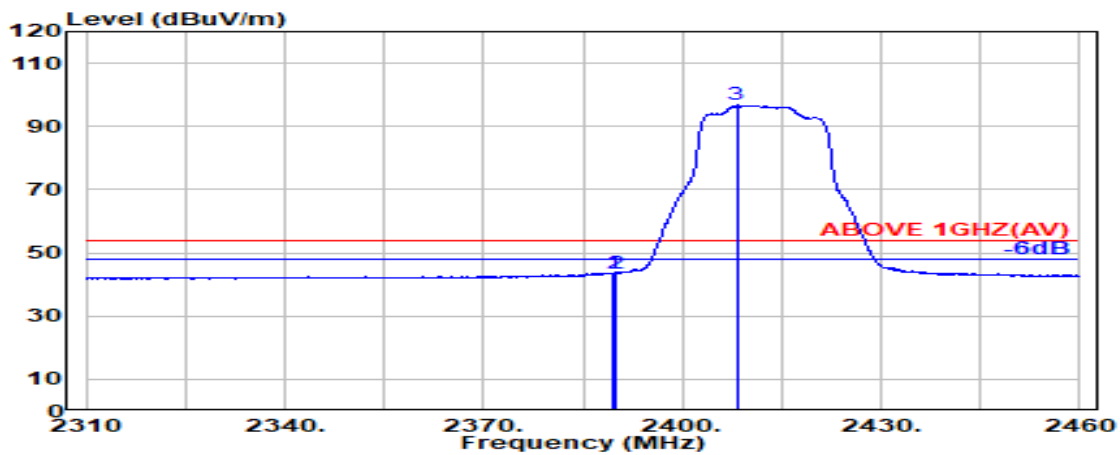


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	49.50	43.48	54.00	10.52	Average
2390.000	28.14	5.72	39.88	49.43	43.41	54.00	10.59	Average
@ 2408.200	28.13	5.74	39.88	102.72	96.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2422MHz
		RU Configuration	242/61

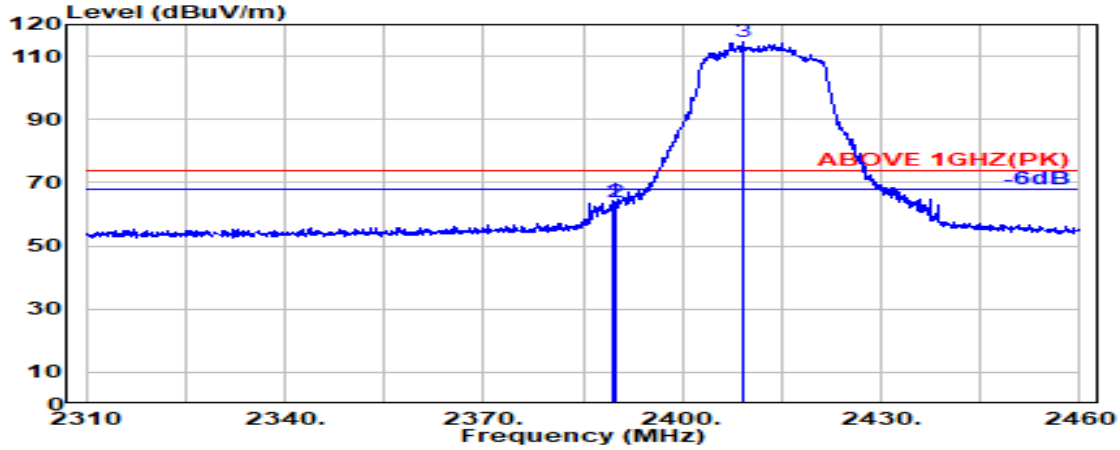

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	70.42	64.41	74.00	9.59	Peak
2390.000	28.14	5.72	39.88	69.92	63.90	74.00	10.10	Peak
@ 2409.100	28.14	5.74	39.88	120.42	114.42	---	---	Peak

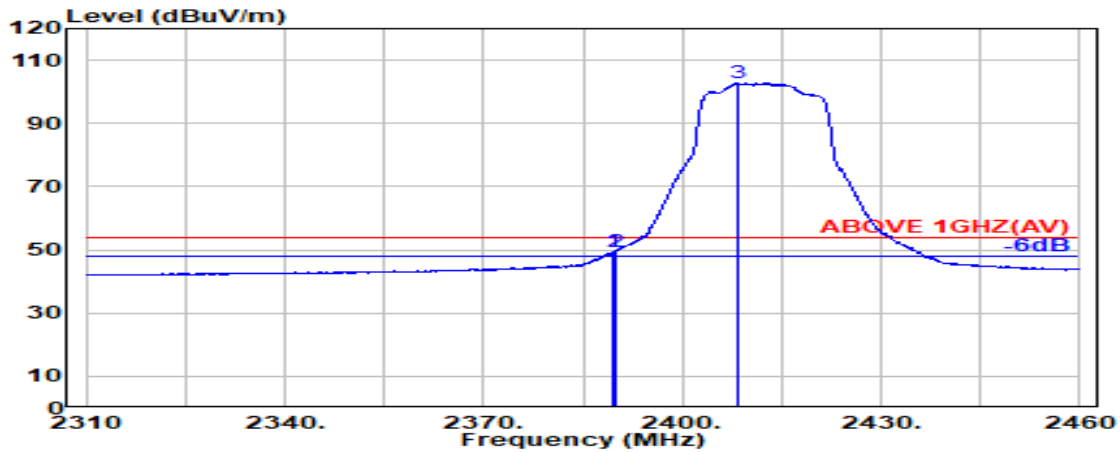


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	55.30	49.28	54.00	4.72	Average
2390.000	28.14	5.72	39.88	55.55	49.53	54.00	4.47	Average
@ 2408.300	28.13	5.74	39.88	108.71	102.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2462MHz
		RU Configuration	242/62

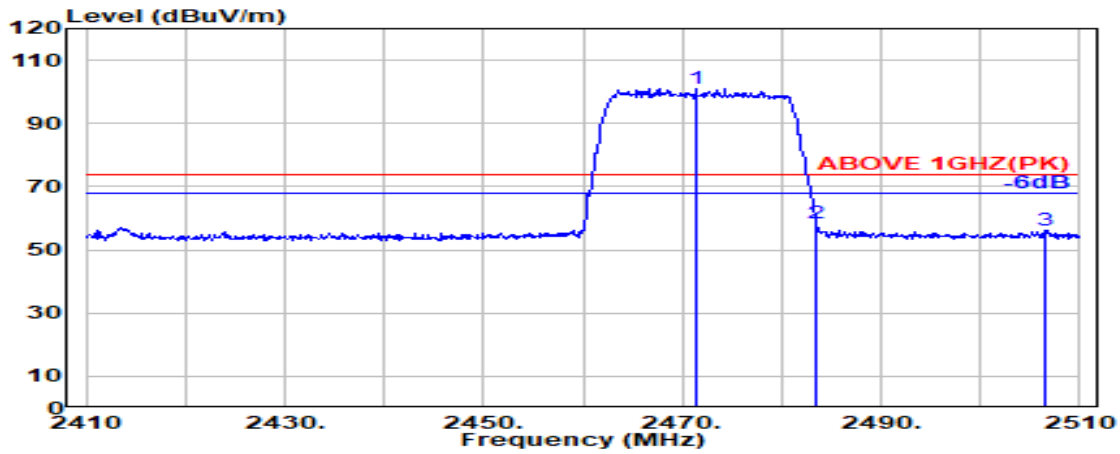

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.34	5.82	39.87	106.64	100.93	---	---	Peak
2483.500	28.37	5.83	39.87	64.00	58.33	74.00	15.67	Peak
2506.600	28.44	5.86	39.87	61.67	56.10	74.00	17.90	Peak

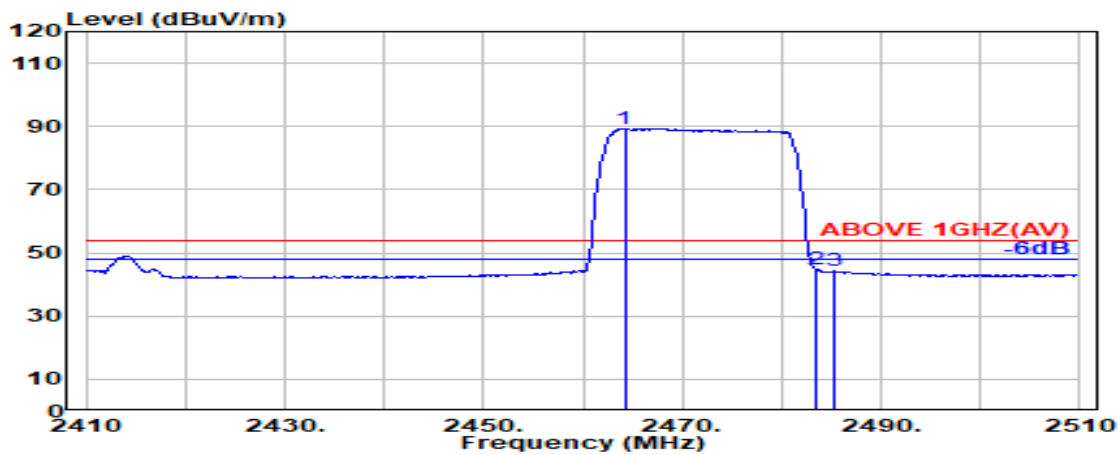


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.33	5.81	39.87	95.05	89.31	---	---	Average
2483.500	28.37	5.83	39.87	50.41	44.73	54.00	9.27	Average
2485.300	28.37	5.83	39.87	49.87	44.20	54.00	9.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2462MHz
		RU Configuration	242/62

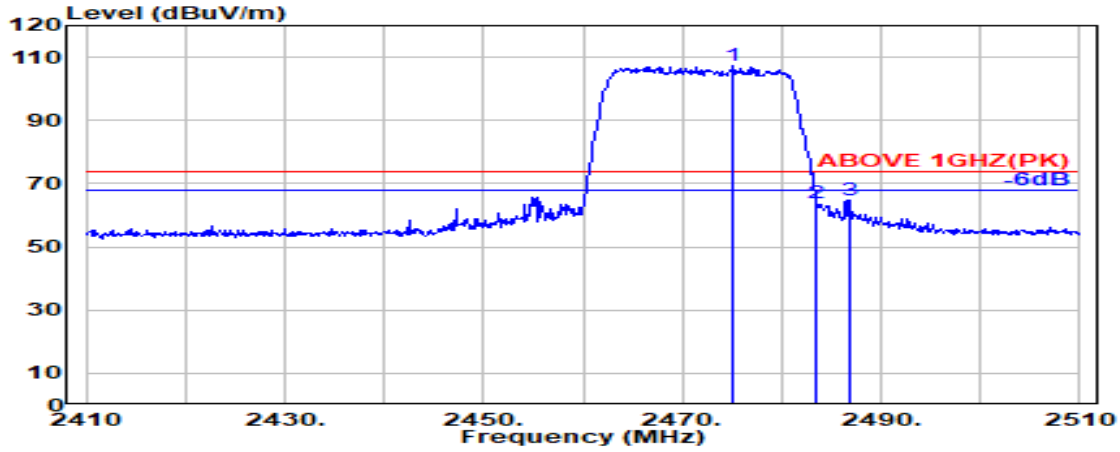

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.100	28.35	5.82	39.87	112.88	107.18	---	---	Peak
2483.500	28.37	5.83	39.87	69.68	64.00	74.00	10.00	Peak
2486.800	28.37	5.83	39.87	70.58	64.92	74.00	9.08	Peak

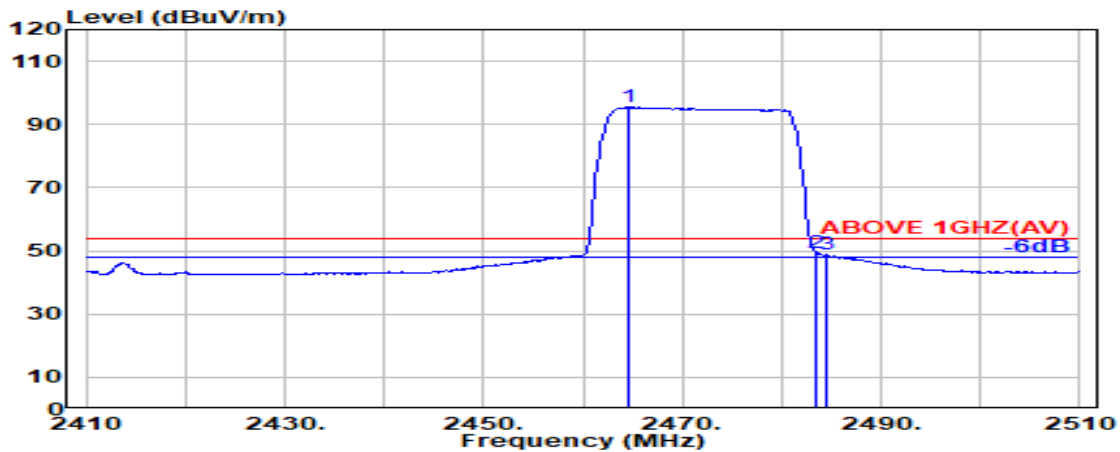


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.600	28.33	5.81	39.87	101.24	95.50	---	---	Average
2483.500	28.37	5.83	39.87	54.99	49.32	54.00	4.68	Average
2484.400	28.37	5.83	39.87	54.37	48.70	54.00	5.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

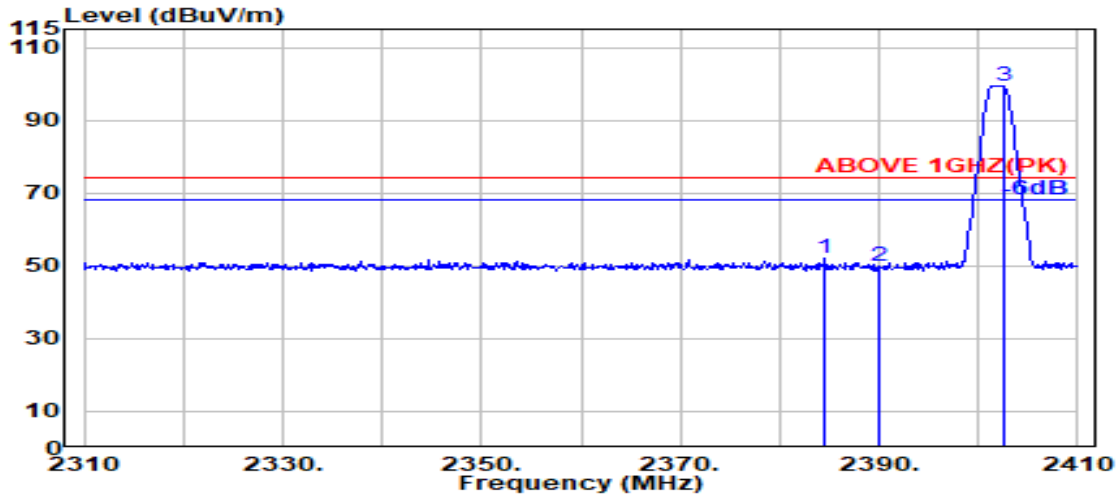

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.600	28.16	5.71	39.88	57.94	51.94	74.00	22.06	Peak
2390.000	28.14	5.72	39.88	55.91	49.89	74.00	24.11	Peak
@ 2402.500	28.11	5.74	39.88	105.54	99.51	---	---	Peak

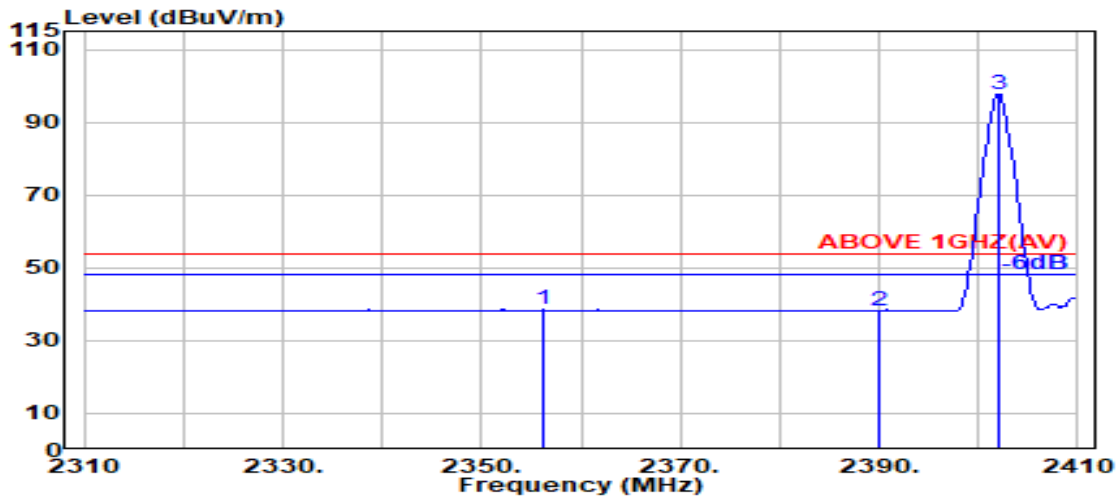


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2356.100	28.28	5.68	39.88	44.43	38.50	54.00	15.50	Average
2390.000	28.14	5.72	39.88	44.15	38.13	54.00	15.87	Average
@ 2402.000	28.11	5.74	39.88	103.76	97.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

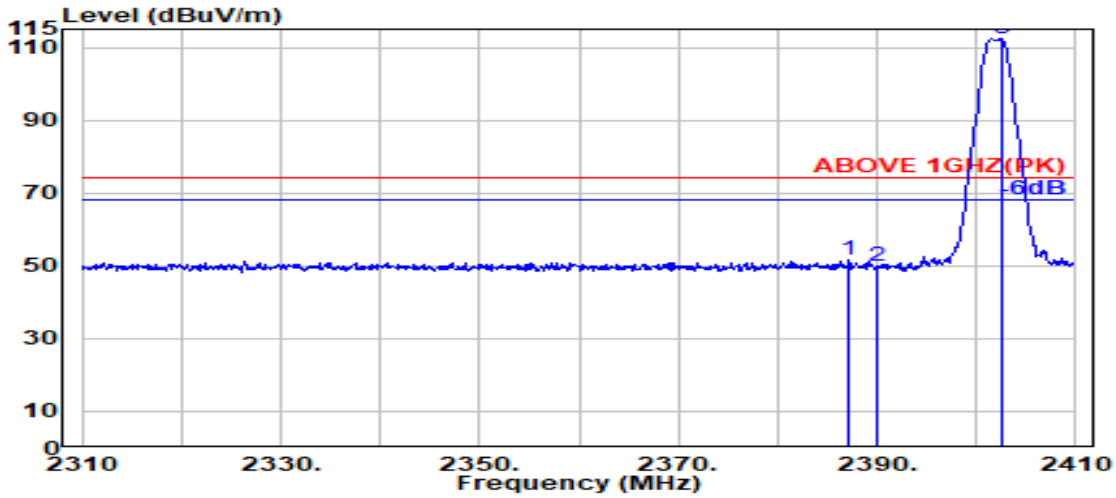

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	28.15	5.72	39.88	57.82	51.81	74.00	22.19	Peak
2390.000	28.14	5.72	39.88	56.03	50.02	74.00	23.98	Peak
@ 2402.500	28.11	5.74	39.88	118.32	112.29	---	---	Peak

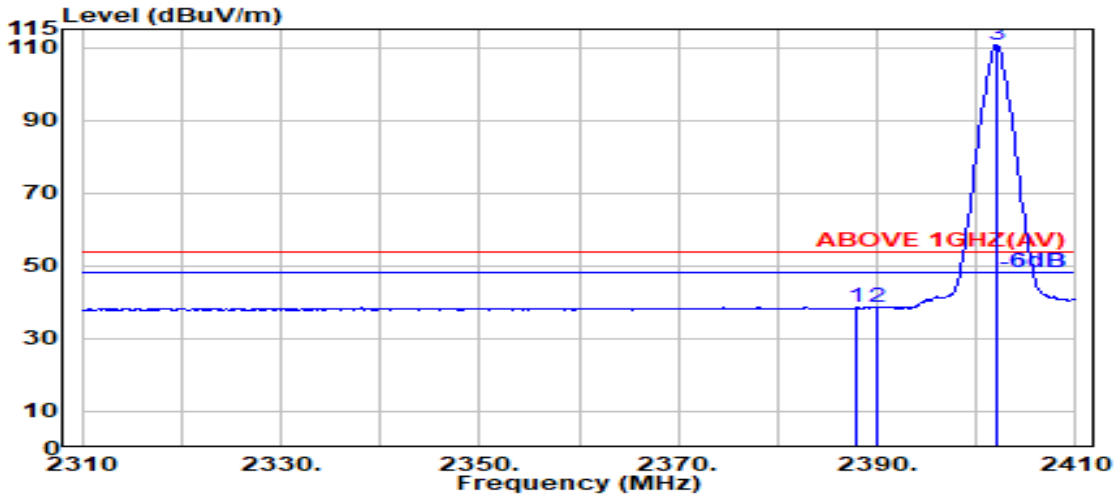


Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.15	5.72	39.88	44.72	38.70	54.00	15.30	Average
2390.000	28.14	5.72	39.88	44.53	38.51	54.00	15.49	Average
@ 2402.000	28.11	5.74	39.88	116.77	110.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

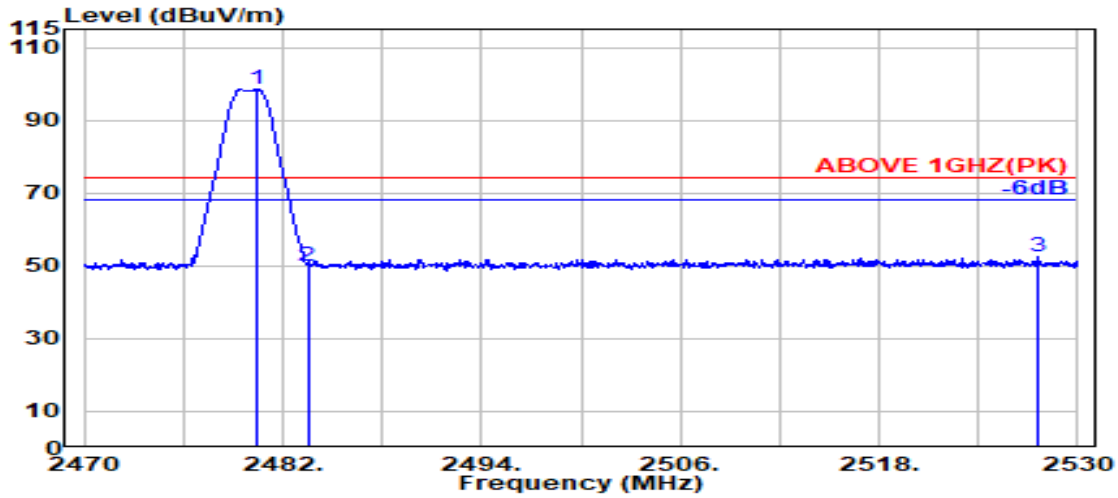

Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.36	5.83	39.87	104.11	98.43	---	---	Peak
2483.500	28.37	5.83	39.87	55.62	49.94	74.00	24.06	Peak
2527.600	28.57	5.88	39.88	57.74	52.31	74.00	21.69	Peak

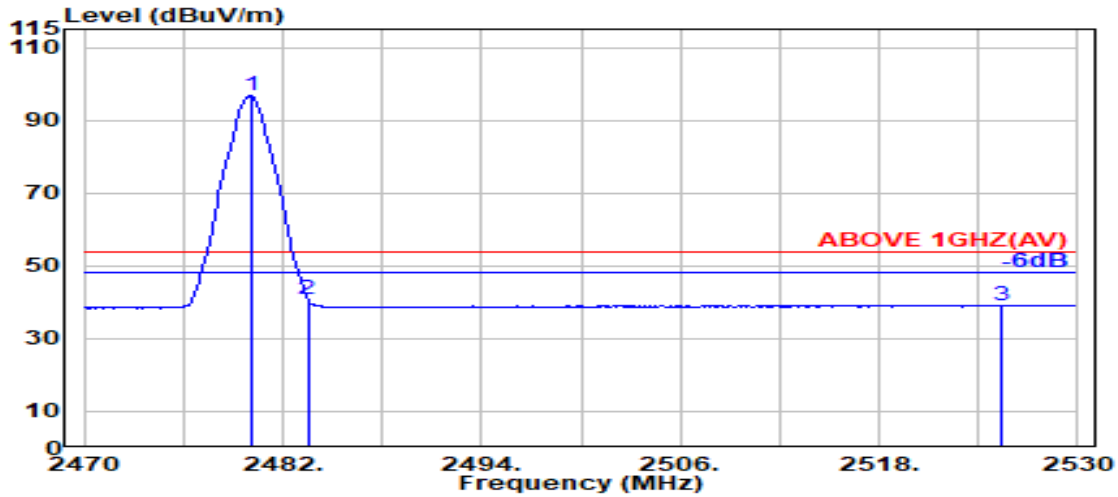


Antenna at HORIZONTAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	102.36	96.67	---	---	Average
2483.500	28.37	5.83	39.87	46.66	40.98	54.00	13.02	Average
2525.350	28.55	5.88	39.88	44.67	39.22	54.00	14.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

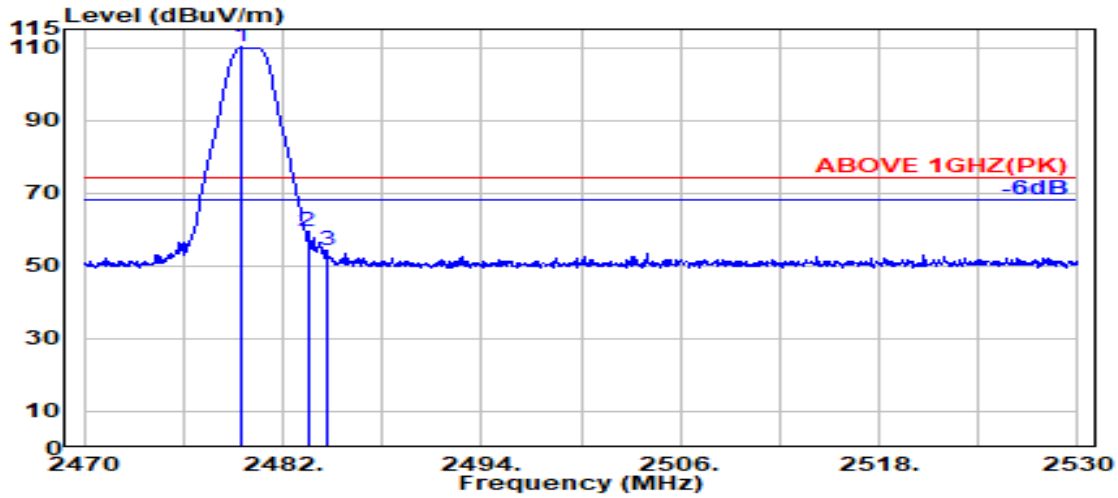

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.36	5.83	39.87	115.72	110.03	---	---	Peak
2483.500	28.37	5.83	39.87	64.98	59.31	74.00	14.69	Peak
2484.700	28.37	5.83	39.87	59.82	54.15	74.00	19.85	Peak

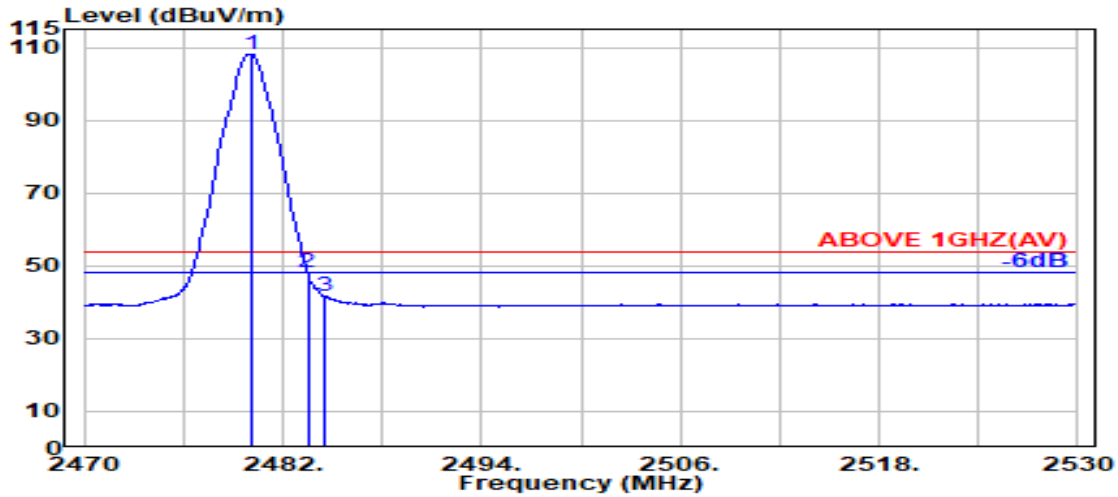

Antenna at VERTICAL Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	113.84	108.16	---	---	Average
2483.500	28.37	5.83	39.87	53.96	48.29	54.00	5.71	Average
2484.550	28.37	5.83	39.87	47.23	41.56	54.00	12.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.75	41.82	54.00	12.18	Peak
7326.000	36.40	10.09	39.44	38.32	45.38	54.00	8.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	40.12	42.19	54.00	11.81	Peak
7326.000	36.40	10.09	39.44	38.41	45.47	54.00	8.53	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	41.09	43.25	54.00	10.75	Peak
7416.000	36.33	10.14	39.46	37.13	44.14	54.00	9.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	39.63	41.79	54.00	12.21	Peak
7416.000	36.33	10.14	39.46	36.35	43.37	54.00	10.63	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	39.74	41.90	54.00	12.10	Peak
7416.000	36.33	10.14	39.46	37.22	44.23	54.00	9.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.32	42.47	54.00	11.53	Peak
7416.000	36.33	10.14	39.46	37.03	44.04	54.00	9.96	Peak

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4854.000	33.11	8.15	39.28	41.22	43.20	54.00	10.80	Peak
7281.000	36.32	10.07	39.42	37.56	44.53	54.00	9.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4854.000	33.11	8.15	39.28	40.20	42.18	54.00	11.82	Peak
7281.000	36.32	10.07	39.42	37.76	44.73	54.00	9.27	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	41.24	43.31	54.00	10.69	Peak
7326.000	36.40	10.09	39.44	37.76	44.81	54.00	9.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	41.35	43.41	54.00	10.59	Peak
7326.000	36.40	10.09	39.44	37.38	44.44	54.00	9.56	Peak

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4854.000	33.11	8.15	39.28	41.18	43.16	54.00	10.84	Peak
7281.000	36.32	10.07	39.42	37.56	44.53	54.00	9.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4854.000	33.11	8.15	39.28	40.22	42.20	54.00	11.80	Peak
7281.000	36.32	10.07	39.42	38.30	45.27	54.00	8.73	Peak

Mode	802.11be-EHT20	Frequency	TX 2442MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	40.03	42.10	54.00	11.90	Peak
7326.000	36.40	10.09	39.44	36.82	43.87	54.00	10.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.50	41.57	54.00	12.43	Peak
7326.000	36.40	10.09	39.44	37.21	44.27	54.00	9.73	Peak

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4854.000	33.11	8.15	39.28	40.30	42.28	54.00	11.72	Peak
7281.000	36.32	10.07	39.42	37.14	44.11	54.00	9.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4854.000	33.11	8.15	39.28	41.81	43.79	54.00	10.21	Peak
7281.000	36.32	10.07	39.42	37.15	44.12	54.00	9.88	Peak

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	41.74	43.48	54.00	10.52	Peak
7206.000	36.11	10.03	39.40	37.70	44.44	54.00	9.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	42.13	43.87	54.00	10.13	Peak
7206.000	36.11	10.03	39.40	37.39	44.13	54.00	9.87	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	38.79	40.85	54.00	13.15	Peak
7320.000	36.40	10.09	39.43	37.60	44.66	54.00	9.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	40.45	42.50	54.00	11.50	Peak
7320.000	36.40	10.09	39.43	37.45	44.51	54.00	9.49	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	40.25	42.46	54.00	11.54	Peak
7440.000	36.38	10.15	39.46	36.93	44.00	54.00	10.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	40.35	42.56	54.00	11.44	Peak
7440.000	36.38	10.15	39.46	36.29	43.36	54.00	10.64	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.