


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	273
A.2.3 Emissions in Non-restricted Frequency Bands.....	297
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	298
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	298
A.3.2 Measurement Plots	323
A.4 POWER SPECTRAL DENSITY	372
A.4.1 Power Spectral Density Result	372
A.4.2 Measurement Plots	393
A.5 FREQUENCY STABILITY	420
A.5.1 Frequency stability Result	420

A.1 CONDUCTED EMISSION

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

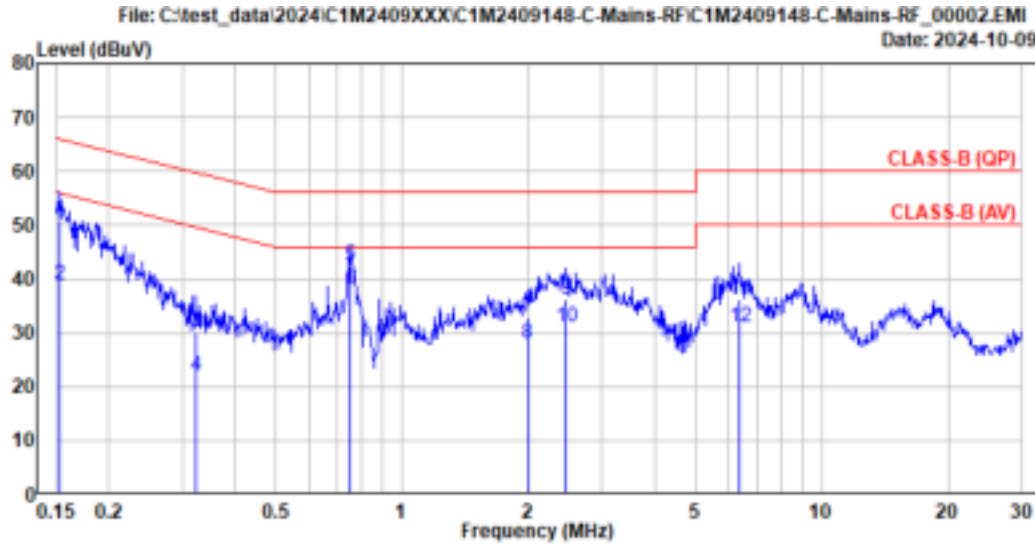


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 24°C/54%	Test Rating	: 120Vac/60Hz
EUT Model	: 16290TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AWF Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.27	0.03	9.85	30.84	50.99	65.88	14.89	QP
2	0.152	10.27	0.03	9.85	18.78	38.93	55.88	16.95	Average
3	0.322	10.26	0.03	9.85	10.07	30.21	59.67	29.46	QP
4	0.322	10.26	0.03	9.85	2.04	22.18	49.67	27.49	Average
5	0.754	10.27	0.04	9.85	22.54	42.70	56.00	13.30	QP
6	0.754	10.27	0.04	9.85	17.74	37.90	46.00	8.10	Average
7	1.993	10.29	0.06	9.86	12.71	32.92	56.00	23.08	QP
8	1.993	10.29	0.06	9.86	7.89	28.10	46.00	17.90	Average
9	2.457	10.30	0.07	9.86	16.06	36.29	56.00	19.71	QP
10	2.457	10.30	0.07	9.86	10.83	31.06	46.00	14.94	Average
11	6.367	10.45	0.10	9.87	15.67	36.09	60.00	23.91	QP
12	6.367	10.45	0.10	9.87	10.81	31.23	50.00	18.77	Average

Remarks: 1. Emission Level(dBµV)= AWF Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

Test Date	2024/10/09	Temp./Hum.	24°C/54%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

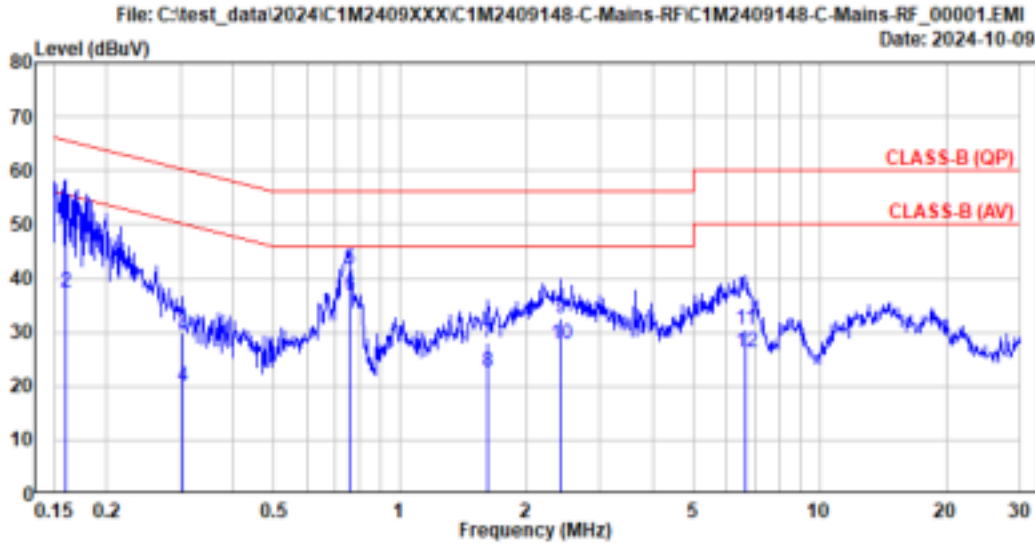

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 24°C/54%	Test Rating	: 120Vac/60Hz
EUT Model	: 16290TP	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.159	10.26	0.03	9.85	31.34	51.48	65.50	14.02	QP
2	0.159	10.26	0.03	9.85	17.39	37.53	55.50	17.97	Average
3	0.303	10.25	0.03	9.85	9.73	29.86	60.16	30.30	QP
4	0.303	10.25	0.03	9.85	-0.18	19.95	50.16	30.21	Average
5	0.758	10.26	0.04	9.85	21.54	41.69	56.00	14.31	QP
6	0.758	10.26	0.04	9.85	16.66	36.81	46.00	9.19	Average
7	1.617	10.27	0.05	9.86	7.96	28.14	56.00	27.86	QP
8	1.617	10.27	0.05	9.86	2.47	22.65	46.00	23.35	Average
9	2.421	10.28	0.07	9.86	12.47	32.68	56.00	23.32	QP
10	2.421	10.28	0.07	9.86	7.44	27.65	46.00	18.35	Average
11	6.659	10.38	0.11	9.87	10.11	30.47	60.00	29.53	QP
12	6.659	10.38	0.11	9.87	5.83	26.19	50.00	23.81	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/10/04~24	Temp./Hum.	22~24°C/52~63%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.38	26.50	34.56	33.01	40.00	6.99	Peak
74.500	12.16	2.19	26.39	43.52	31.47	40.00	8.53	Peak
148.500	16.41	3.05	26.04	42.21	35.62	43.50	7.88	Peak
223.000	16.34	3.78	25.78	36.72	31.06	46.00	14.94	Peak
343.000	19.77	5.10	26.06	32.51	31.32	46.00	14.68	Peak
445.500	21.93	6.20	26.86	37.13	38.40	46.00	7.60	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	23.14	1.39	26.50	39.61	37.64	40.00	2.36	Peak
91.500	15.02	2.39	26.34	47.92	38.99	43.50	4.51	Peak
148.500	16.41	3.05	26.04	45.08	38.49	43.50	5.01	Peak
346.000	19.85	5.14	26.09	34.63	33.54	46.00	12.46	Peak
445.500	21.93	6.20	26.86	38.93	40.20	46.00	5.80	Peak
742.500	24.75	7.53	27.42	31.72	36.57	46.00	9.43	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

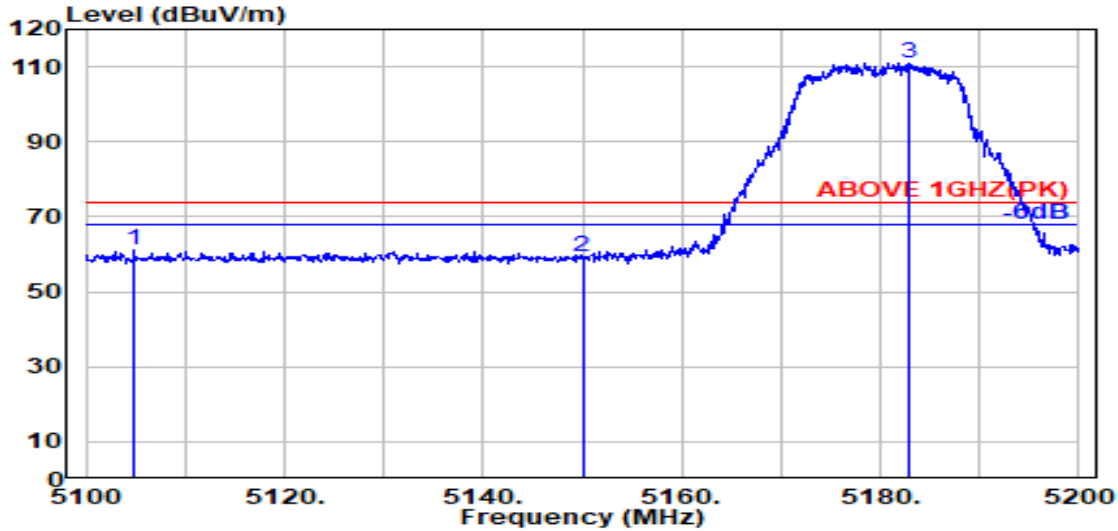

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.900	33.41	8.33	39.20	58.39	60.94	74.00	13.06	Peak
5150.000	33.50	8.37	39.19	56.55	59.24	74.00	14.76	Peak
@ 5182.800	33.70	8.41	39.19	108.17	111.08	---	---	Peak

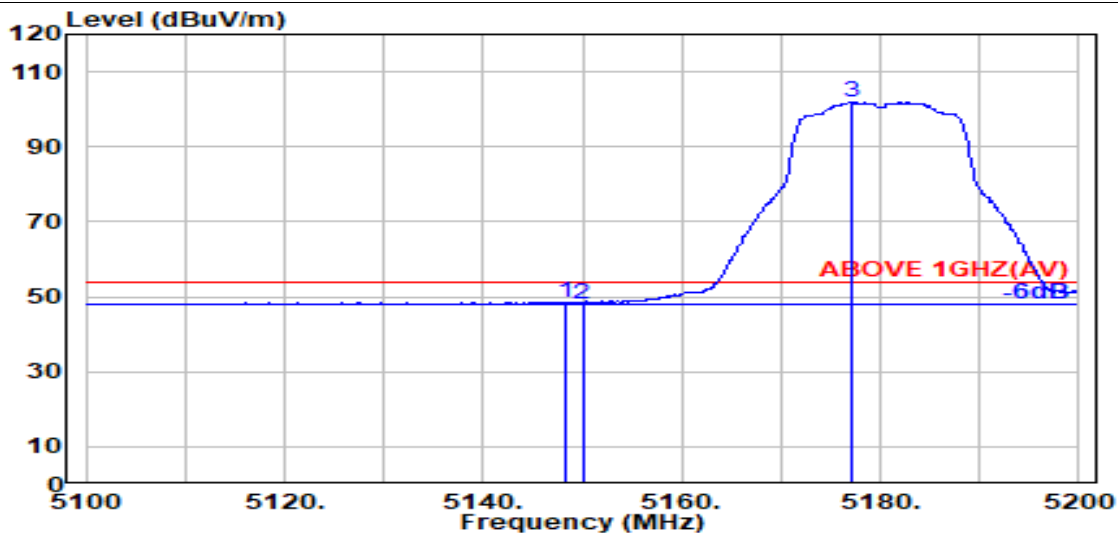


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.50	8.37	39.19	45.95	48.63	54.00	5.37	Average
5150.000	33.50	8.37	39.19	45.50	48.18	54.00	5.82	Average
@ 5177.200	33.66	8.40	39.19	99.06	101.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

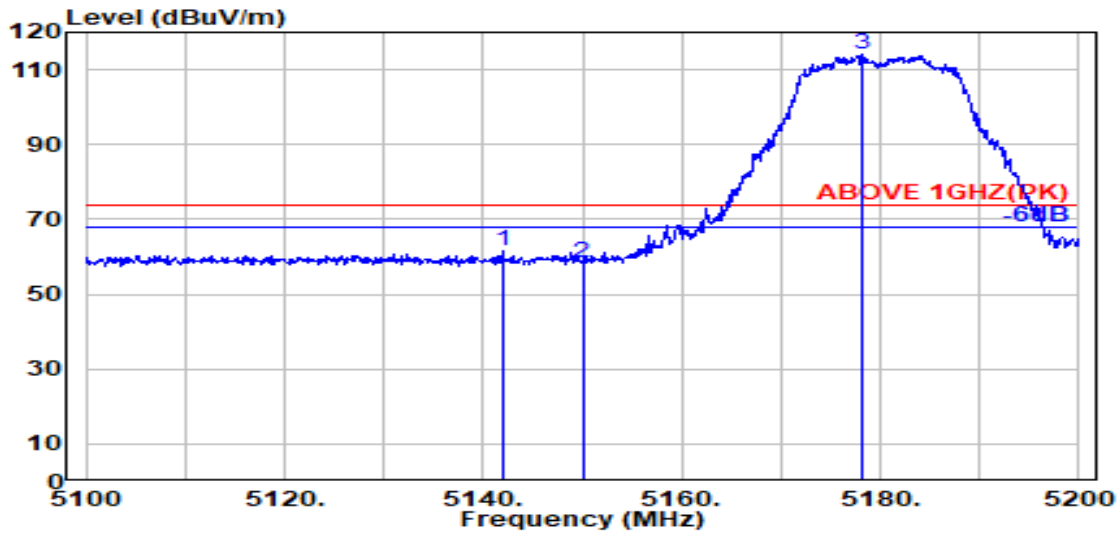

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.900	33.48	8.37	39.19	58.84	61.49	74.00	12.51	Peak
5150.000	33.50	8.37	39.19	55.87	58.56	74.00	15.44	Peak
@ 5178.100	33.67	8.40	39.19	111.03	113.91	---	---	Peak

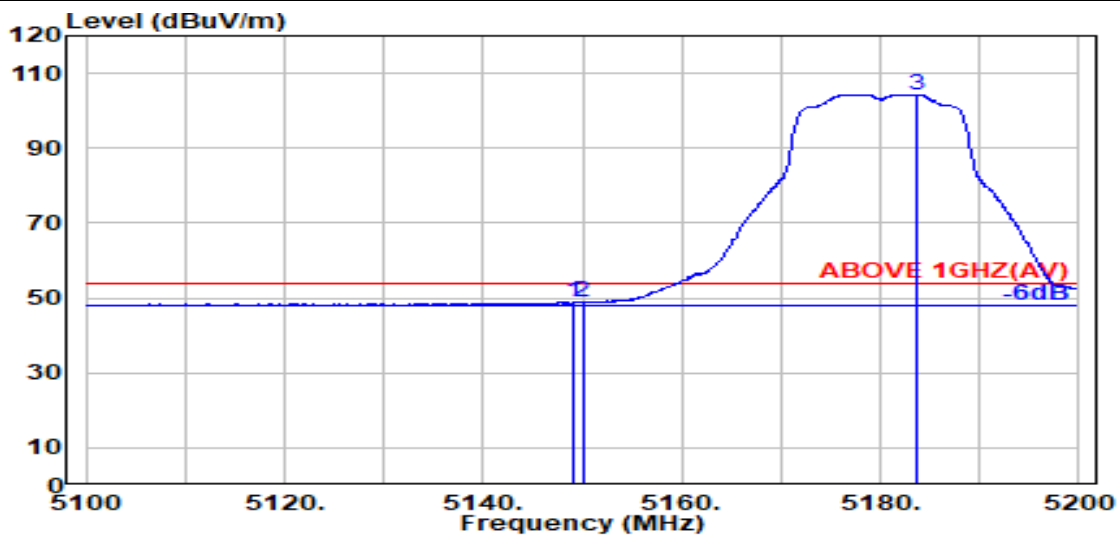


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.19	46.26	48.94	54.00	5.06	Average
5150.000	33.50	8.37	39.19	46.04	48.72	54.00	5.28	Average
@ 5183.600	33.70	8.41	39.19	101.43	104.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

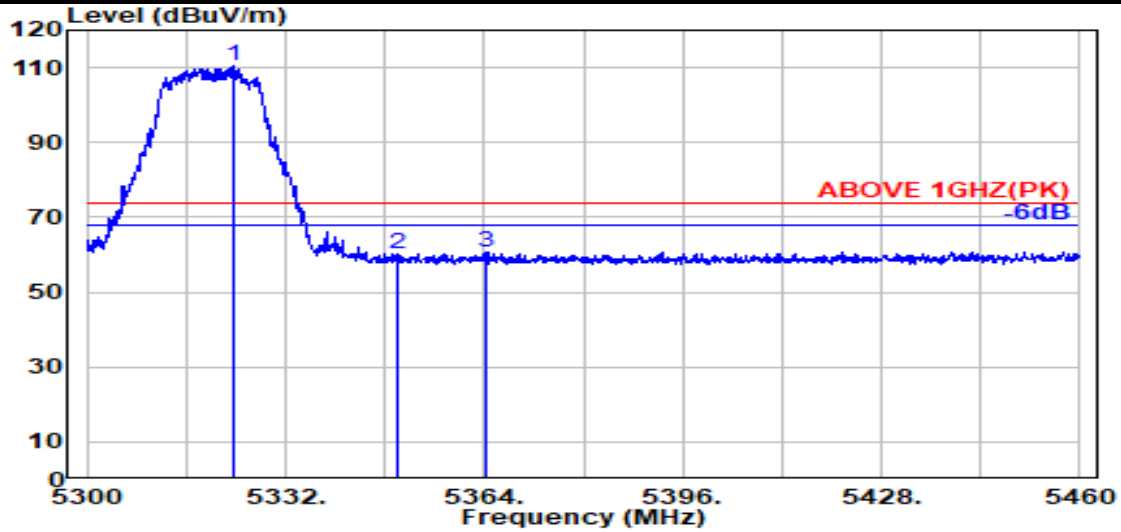

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	33.75	8.55	39.17	107.48	110.61	---	---	Peak
5350.000	33.70	8.57	39.17	57.06	60.16	74.00	13.84	Peak
5364.400	33.76	8.59	39.17	57.68	60.86	74.00	13.14	Peak

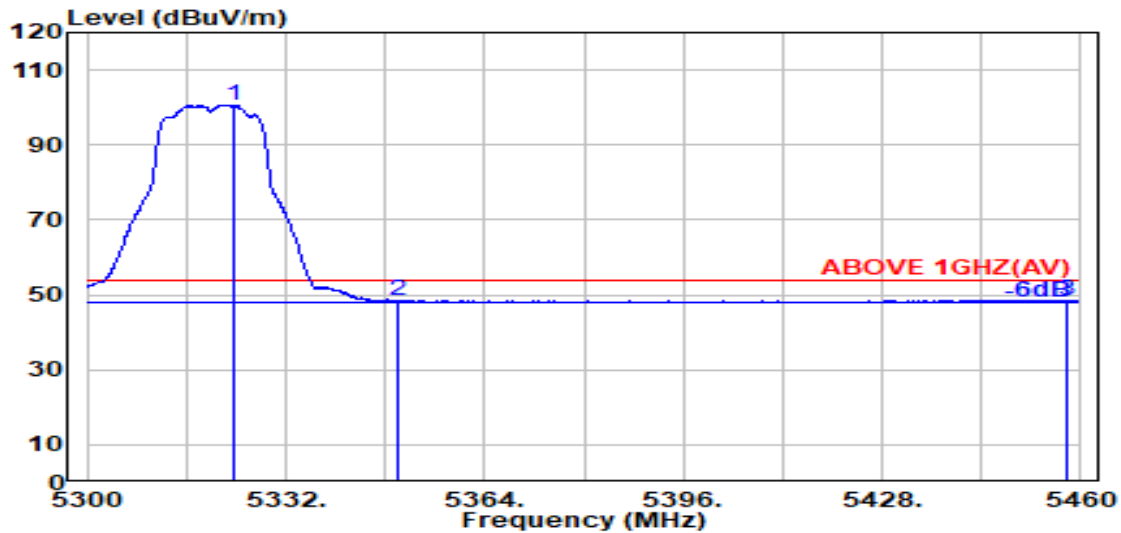


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	33.75	8.55	39.17	97.48	100.61	---	---	Average
5350.000	33.70	8.57	39.17	45.15	48.26	54.00	5.74	Average
5457.900	34.02	8.68	39.15	45.10	48.63	54.00	5.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

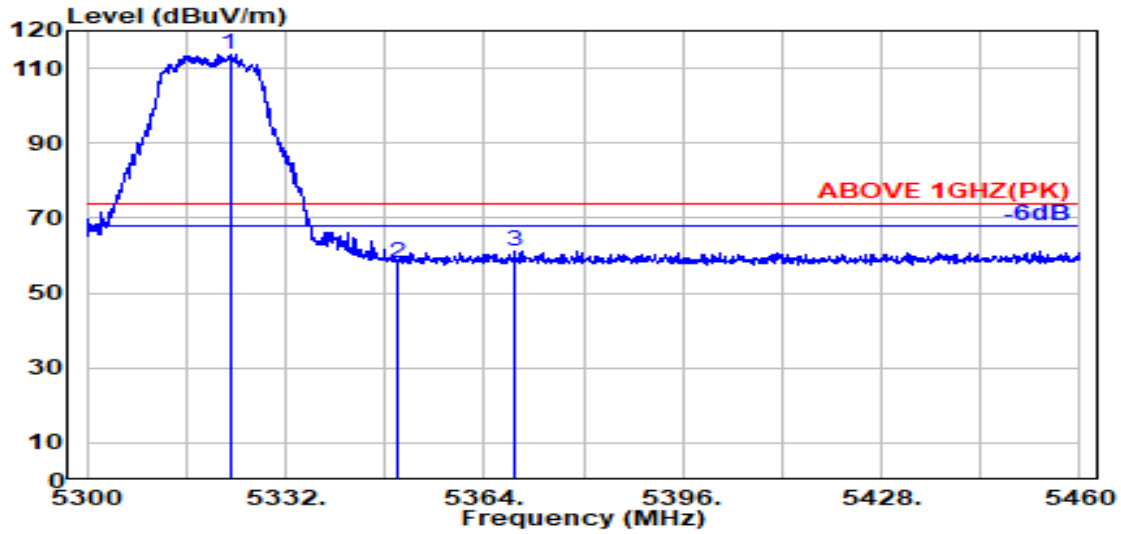

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.000	33.75	8.55	39.17	110.63	113.76	---	---	Peak
5350.000	33.70	8.57	39.17	55.02	58.12	74.00	15.88	Peak
5368.800	33.78	8.59	39.17	58.13	61.33	74.00	12.67	Peak

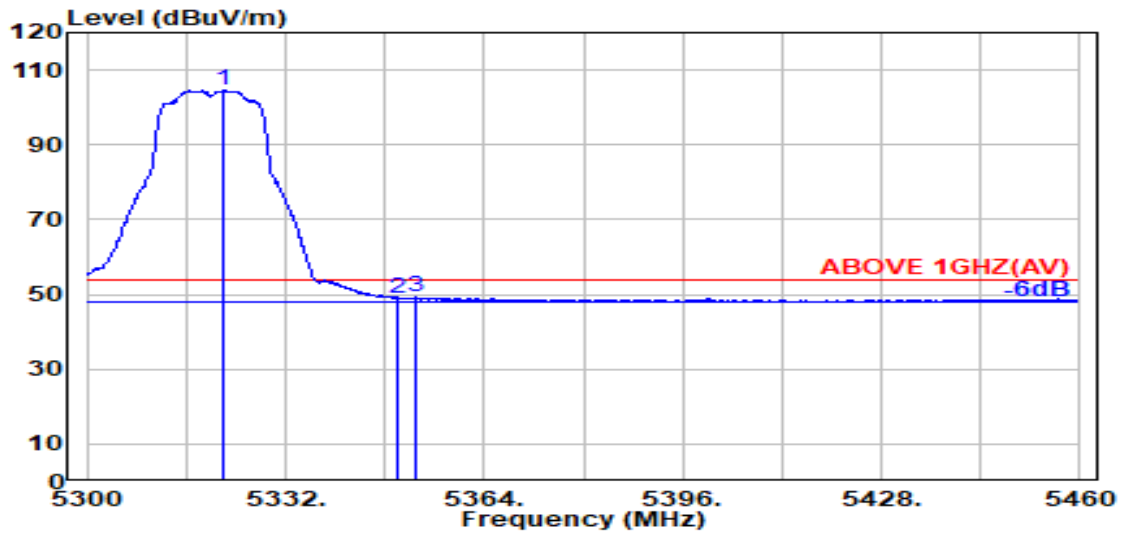


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.900	33.76	8.55	39.17	101.42	104.55	---	---	Average
5350.000	33.70	8.57	39.17	45.95	49.06	54.00	4.94	Average
5353.000	33.71	8.58	39.17	46.11	49.23	54.00	4.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

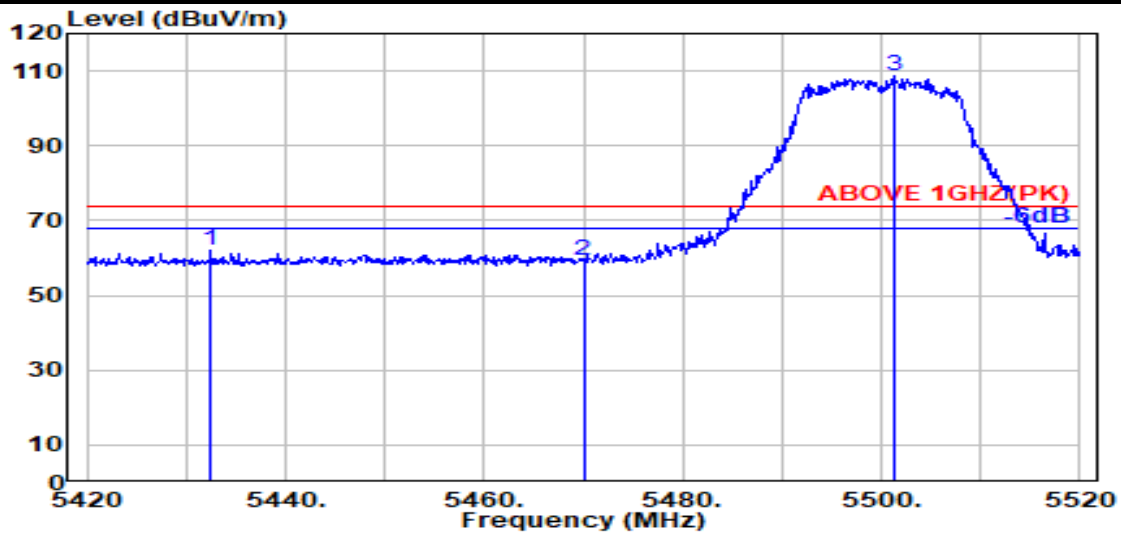

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.500	33.97	8.65	39.16	58.49	61.95	74.00	12.05	Peak
5470.000	34.04	8.69	39.15	55.72	59.30	74.00	14.70	Peak
@ 5501.200	34.10	8.72	39.15	104.81	108.48	---	---	Peak

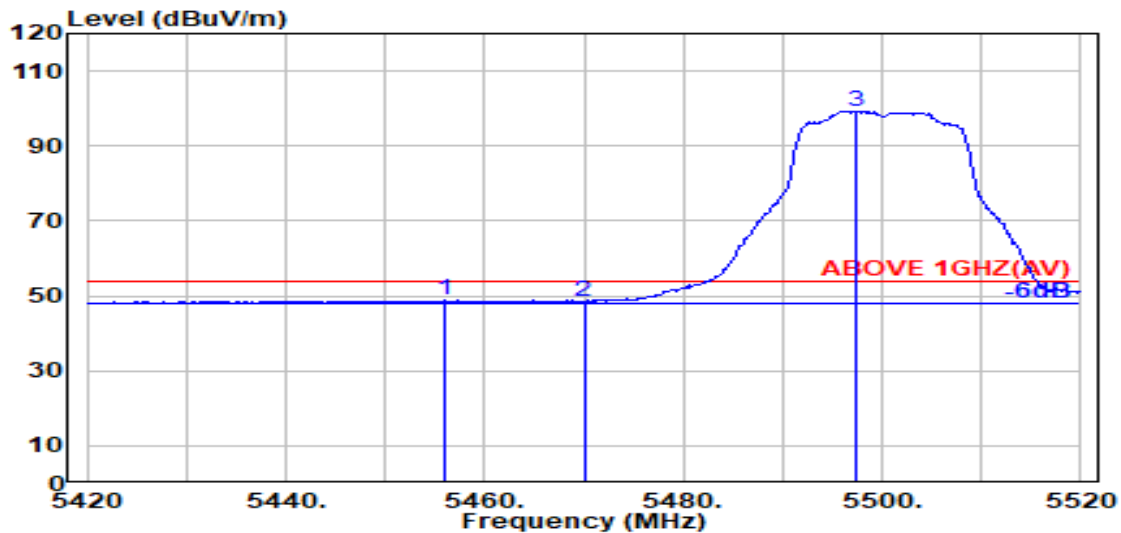


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.000	34.01	8.67	39.16	45.38	48.92	54.00	5.08	Average
5470.000	34.04	8.69	39.15	45.03	48.61	54.00	5.39	Average
@ 5497.500	34.10	8.71	39.15	95.73	99.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

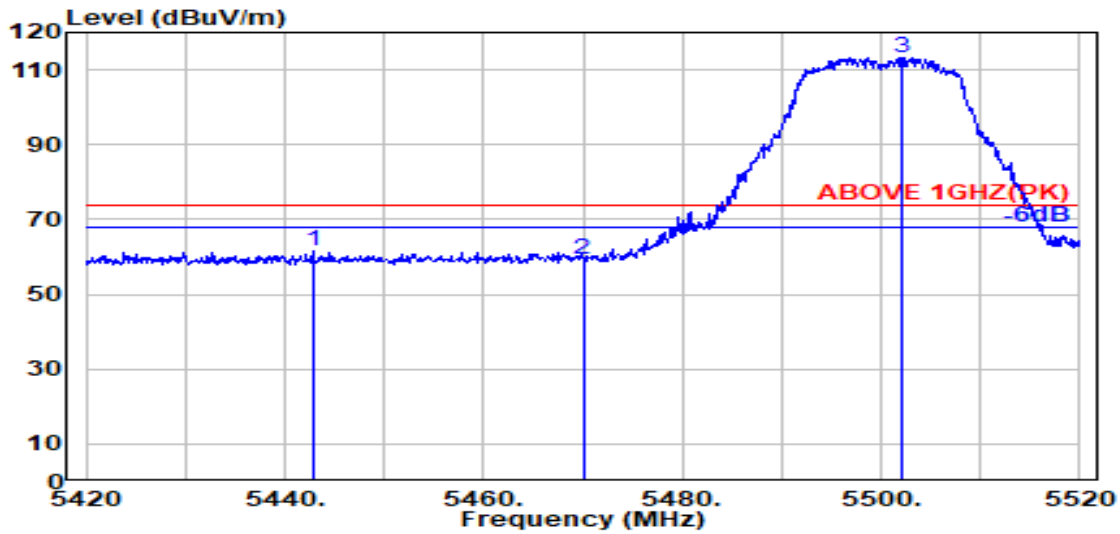

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.800	33.99	8.66	39.16	57.95	61.45	74.00	12.55	Peak
5470.000	34.04	8.69	39.15	55.96	59.54	74.00	14.46	Peak
@ 5502.100	34.10	8.72	39.15	109.77	113.43	---	---	Peak

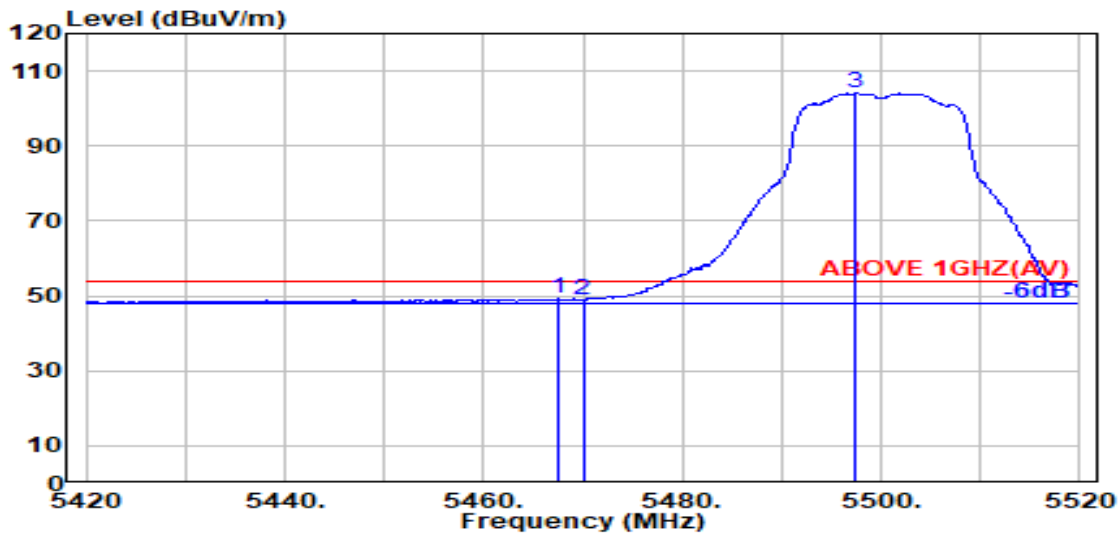


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.15	45.59	49.15	54.00	4.85	Average
5470.000	34.04	8.69	39.15	45.55	49.13	54.00	4.87	Average
@ 5497.500	34.10	8.71	39.15	100.56	104.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

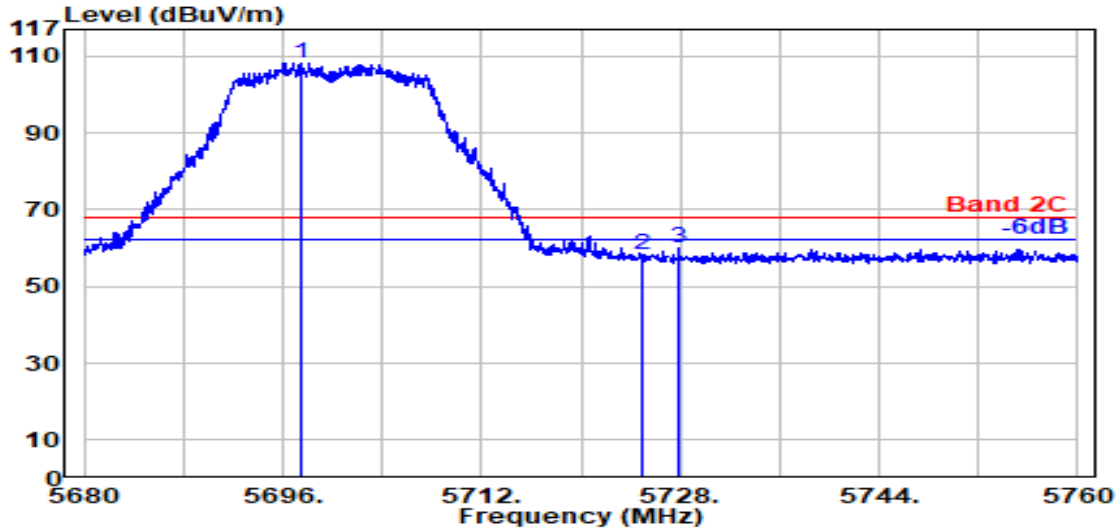

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.400	33.61	8.90	39.19	105.03	108.35	---	---	Peak
5725.000	33.60	8.93	39.20	55.05	58.38	68.20	9.82	Peak
5727.850	33.60	8.93	39.20	56.56	59.89	68.20	8.31	Peak

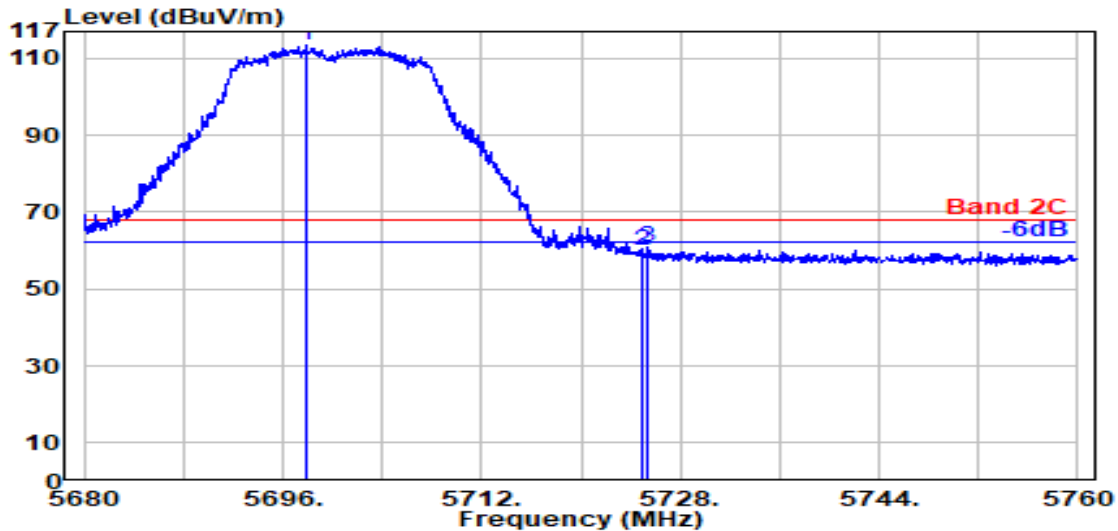


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.850	33.61	8.90	39.19	110.14	113.45	---	---	Peak
5725.000	33.60	8.93	39.20	56.59	59.92	68.20	8.28	Peak
5725.350	33.60	8.93	39.20	57.71	61.04	68.20	7.16	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

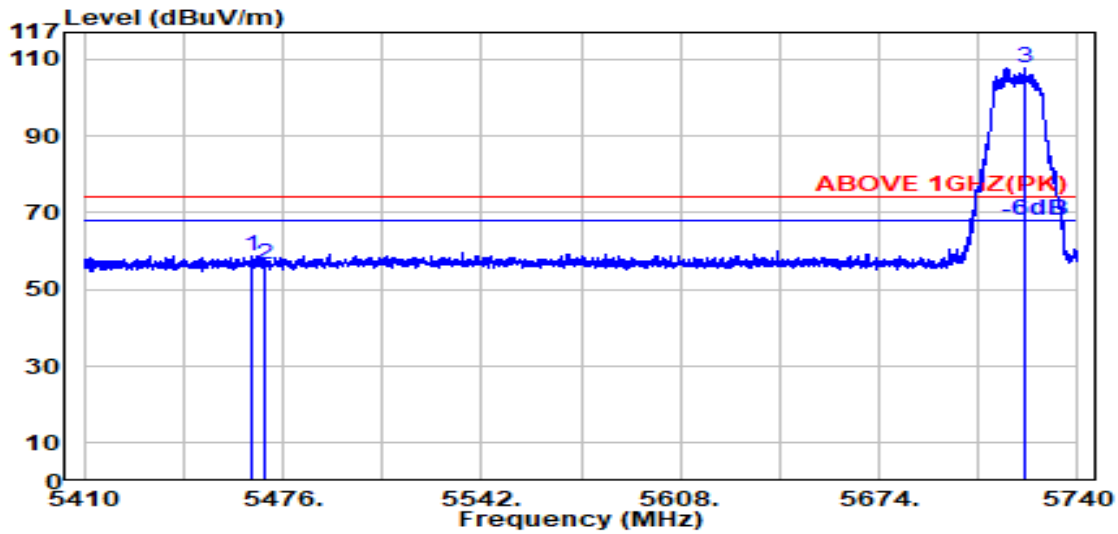

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.03	8.68	39.15	55.38	58.94	74.00	15.06	Peak
5470.000	34.04	8.69	39.15	52.91	56.49	74.00	17.51	Peak
@ 5722.600	33.60	8.92	39.20	104.51	107.84	---	---	Peak

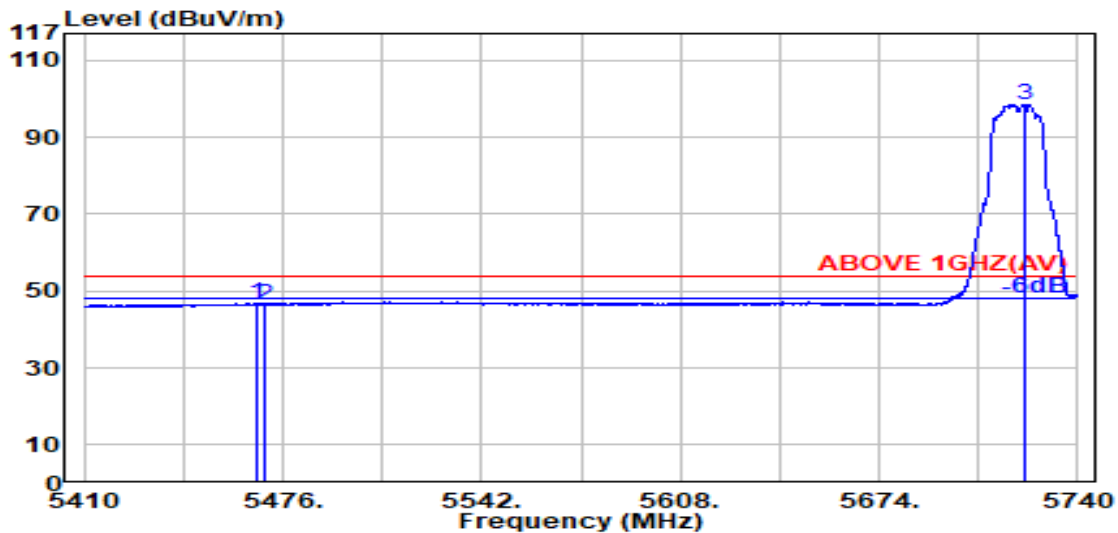


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.15	43.18	46.75	54.00	7.25	Average
5470.000	34.04	8.69	39.15	42.88	46.46	54.00	7.54	Average
@ 5722.200	33.60	8.92	39.20	95.30	98.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

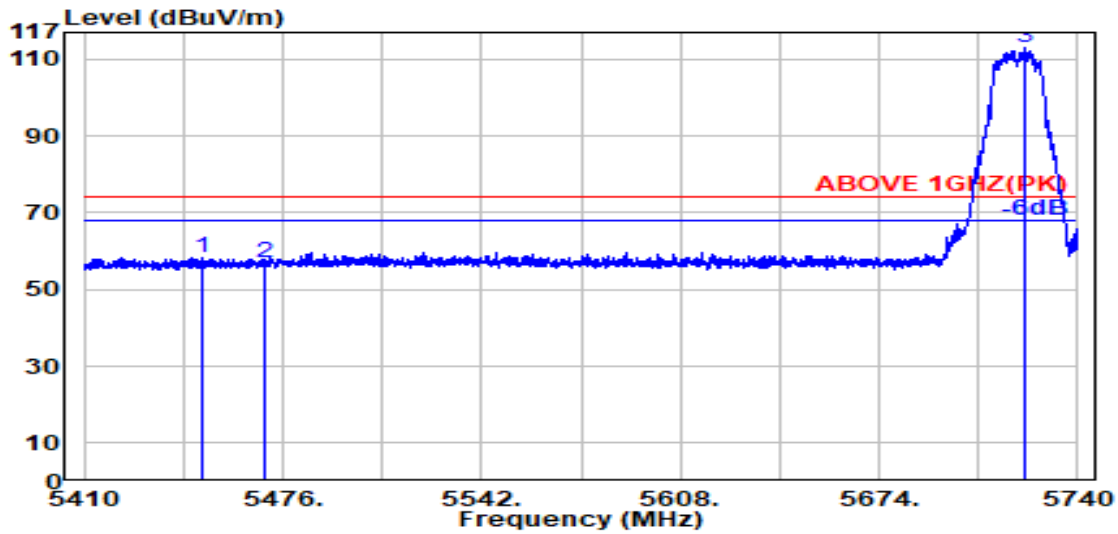

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.500	34.00	8.67	39.16	54.70	58.21	74.00	15.79	Peak
5470.000	34.04	8.69	39.15	53.28	56.86	74.00	17.14	Peak
@ 5722.100	33.60	8.92	39.20	109.70	113.03	---	---	Peak

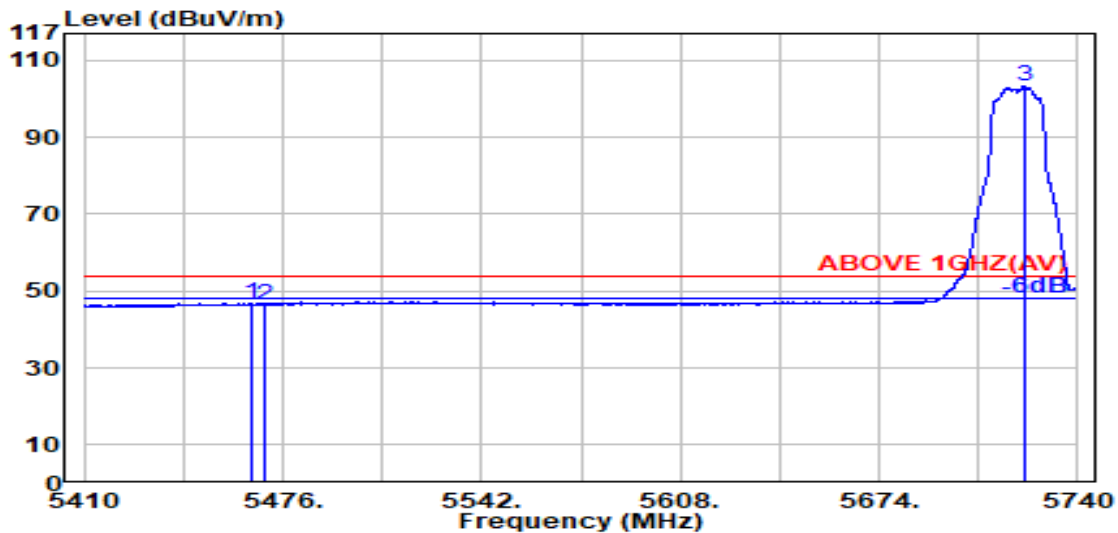


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.15	43.14	46.70	54.00	7.30	Average
5470.000	34.04	8.69	39.15	42.92	46.49	54.00	7.51	Average
@ 5722.200	33.60	8.92	39.20	99.93	103.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

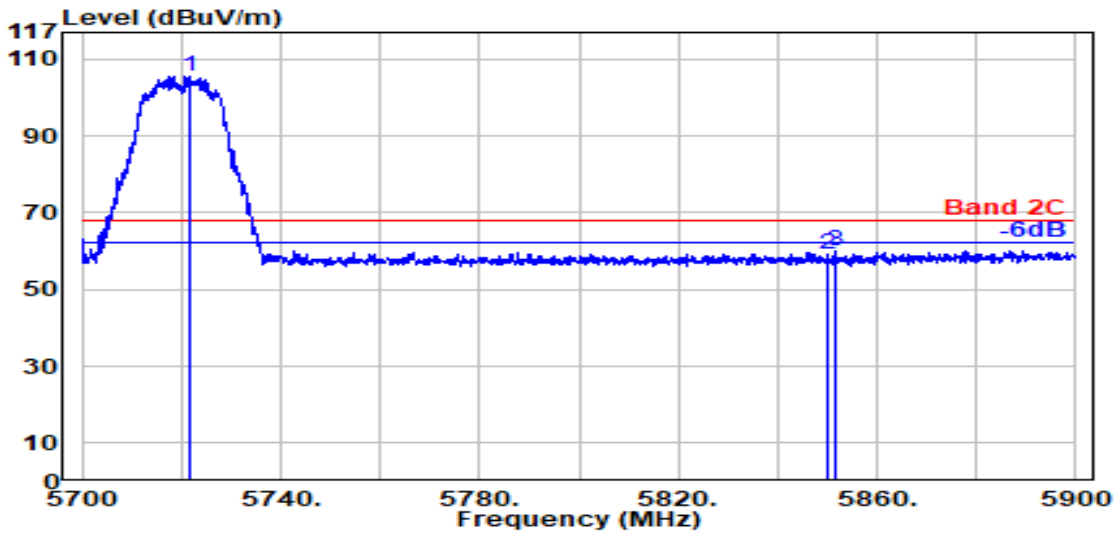

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.500	33.60	8.92	39.20	102.13	105.45	---	---	Peak
5850.000	33.90	9.04	39.22	55.46	59.18	68.20	9.02	Peak
5851.400	33.91	9.04	39.22	56.25	59.97	68.20	8.23	Peak

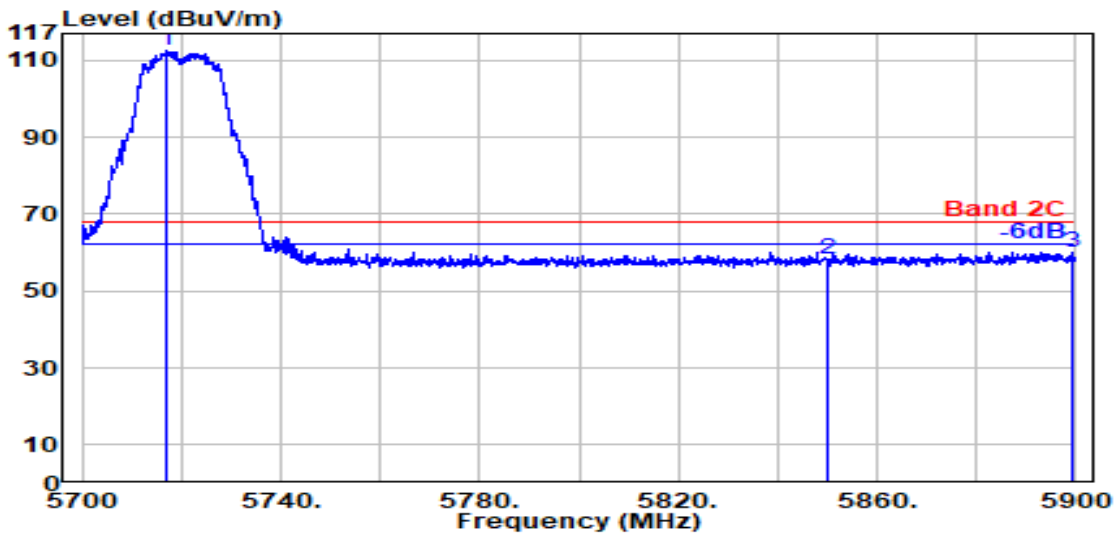


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.200	33.60	8.92	39.19	109.27	112.60	---	---	Peak
5850.000	33.90	9.04	39.22	54.55	58.27	68.20	9.93	Peak
5899.200	34.10	9.08	39.23	56.13	60.08	68.20	8.12	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

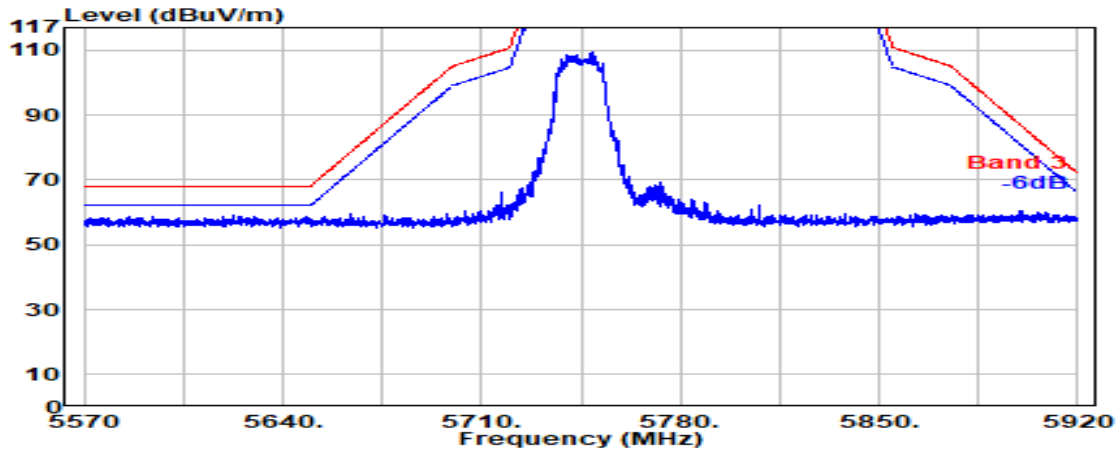


Antenna at Vertical Polarization

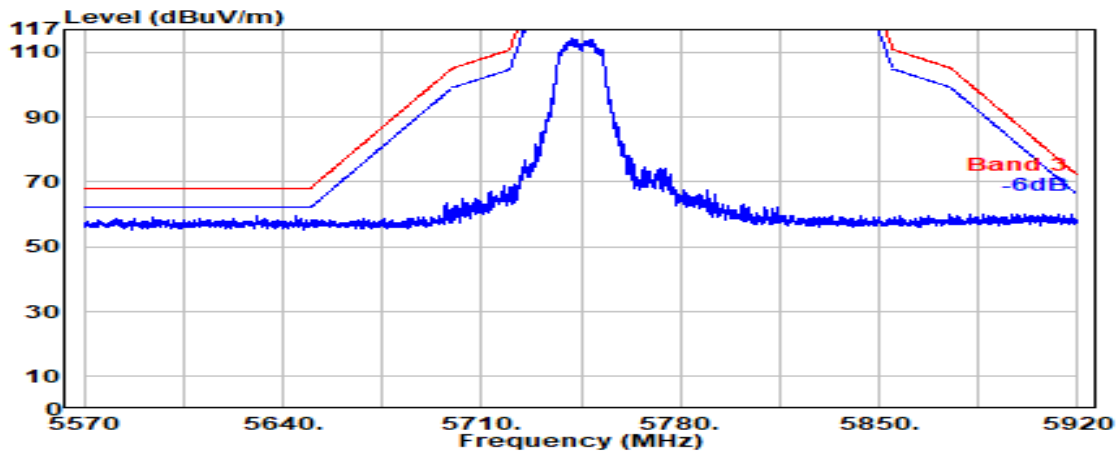


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

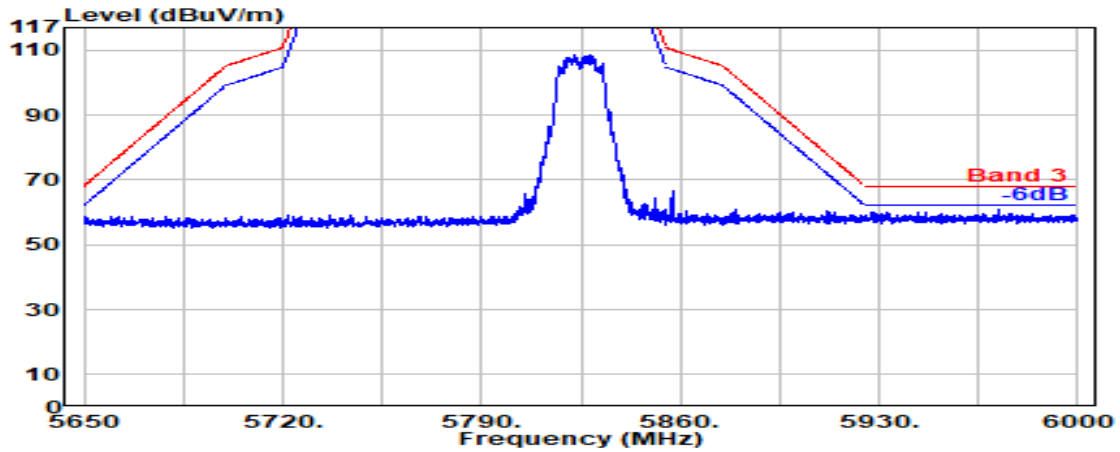

Antenna at Vertical Polarization

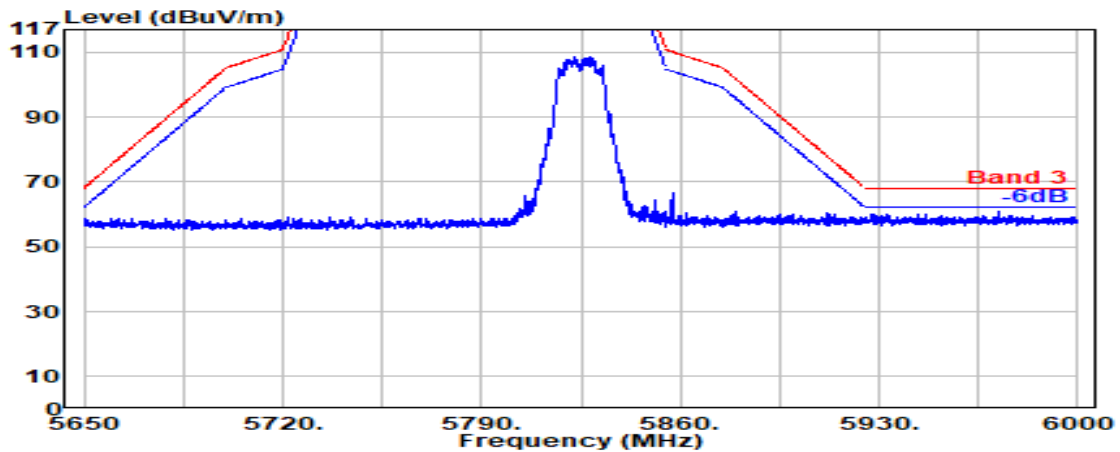


Mode	802.11a	U-NII Band	4
		Frequency	TX 5885MHz

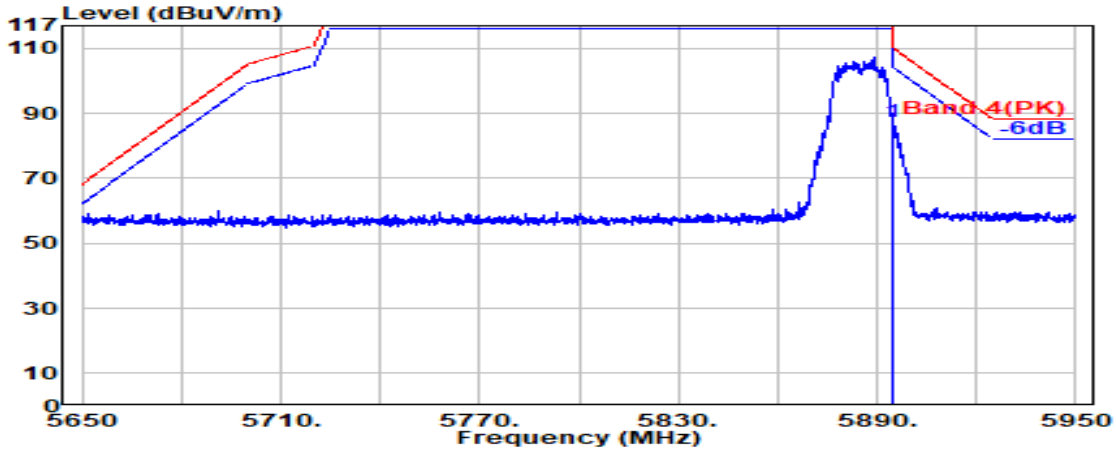

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	83.70	87.63	110.20	22.57	Peak

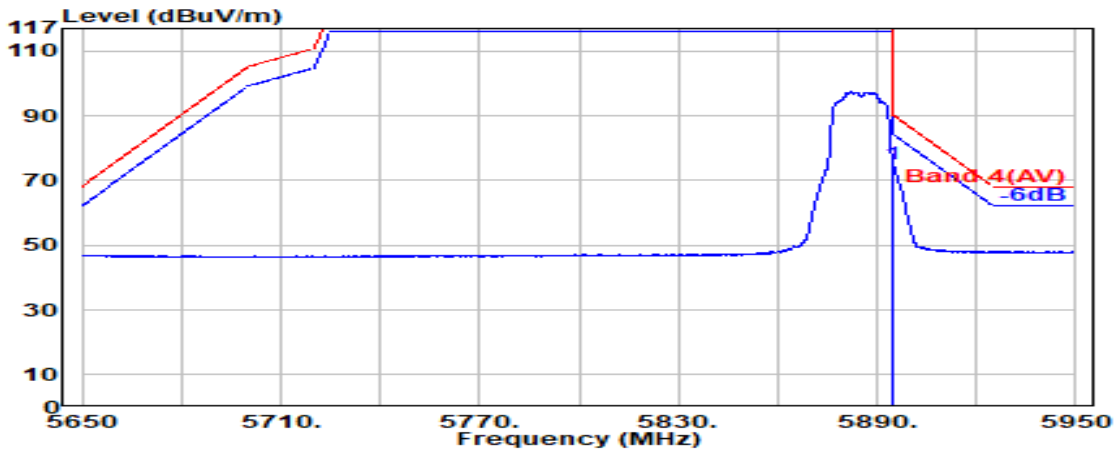


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	70.96	74.89	90.20	15.31	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11a	U-NII Band	4
		Frequency	TX 5885MHz

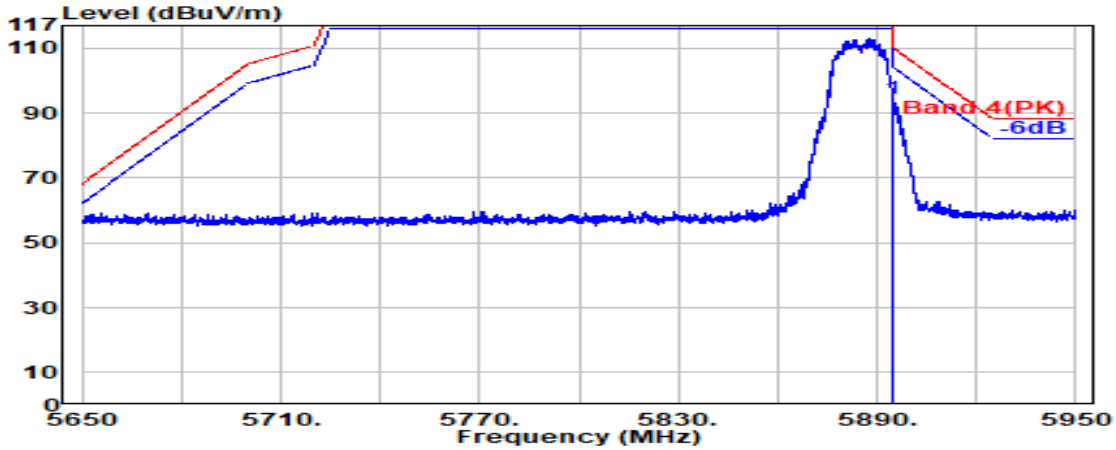

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	90.48	94.40	110.20	15.80	Peak

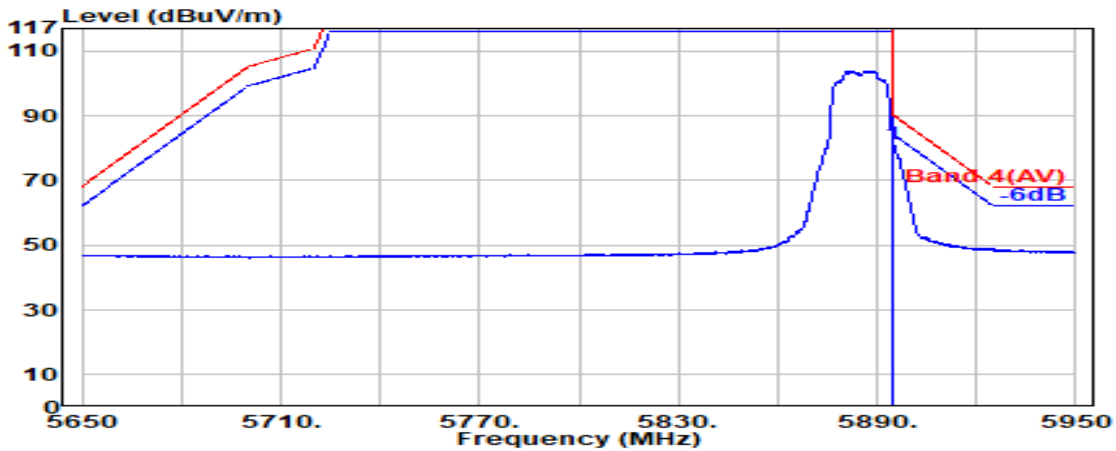


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	77.30	81.23	90.20	8.97	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

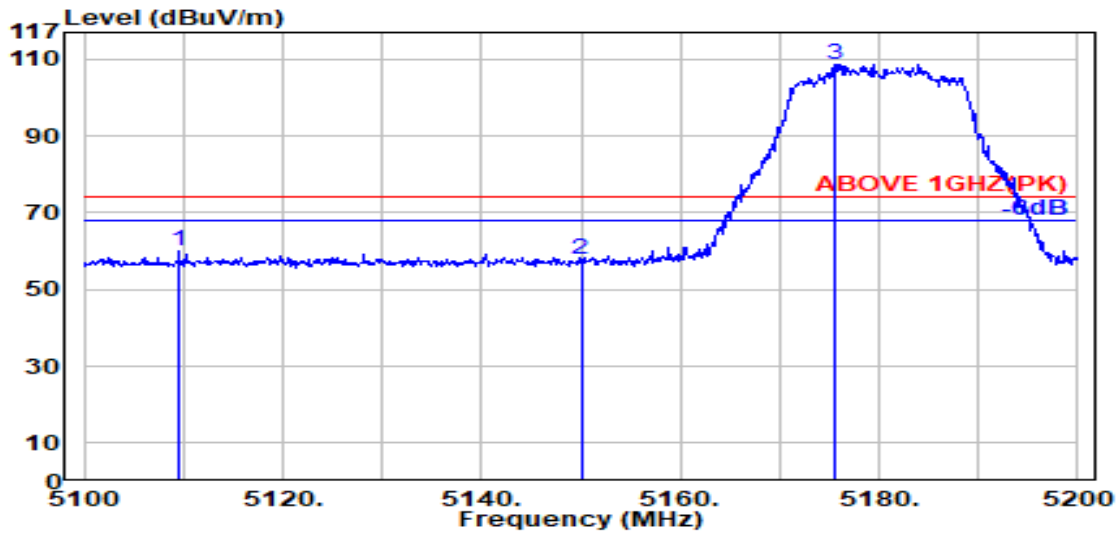

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.500	33.42	8.33	39.20	57.38	59.93	74.00	14.07	Peak
5150.000	33.50	8.37	39.19	54.94	57.63	74.00	16.37	Peak
@ 5175.500	33.65	8.40	39.19	105.93	108.79	---	---	Peak

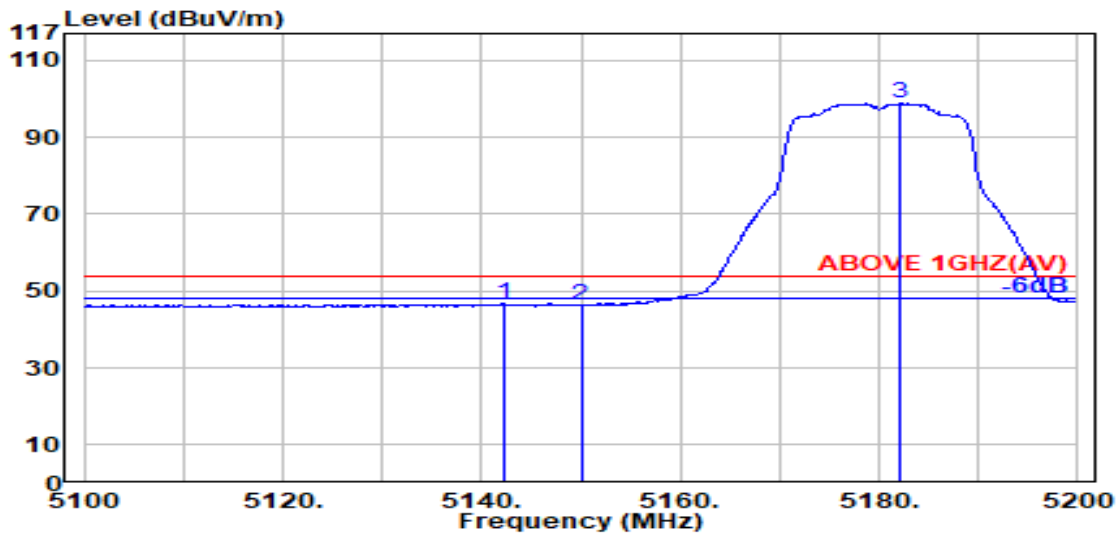


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.300	33.48	8.37	39.19	43.96	46.62	54.00	7.38	Average
5150.000	33.50	8.37	39.19	43.66	46.34	54.00	7.66	Average
@ 5182.100	33.69	8.41	39.19	95.81	98.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

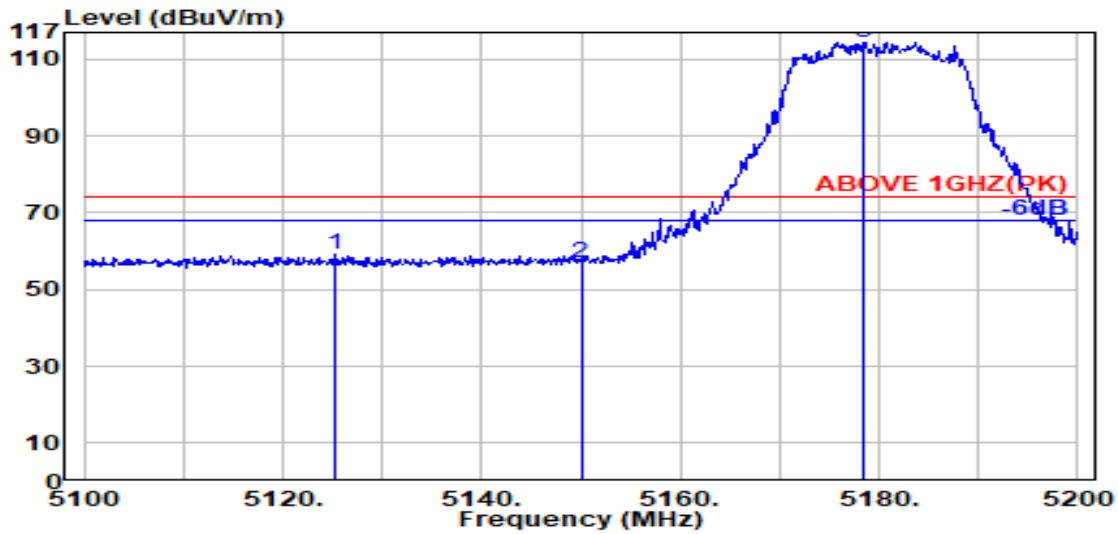

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.300	33.45	8.35	39.19	56.46	59.06	74.00	14.94	Peak
5150.000	33.50	8.37	39.19	54.18	56.86	74.00	17.14	Peak
@ 5178.500	33.67	8.40	39.19	111.50	114.38	---	---	Peak

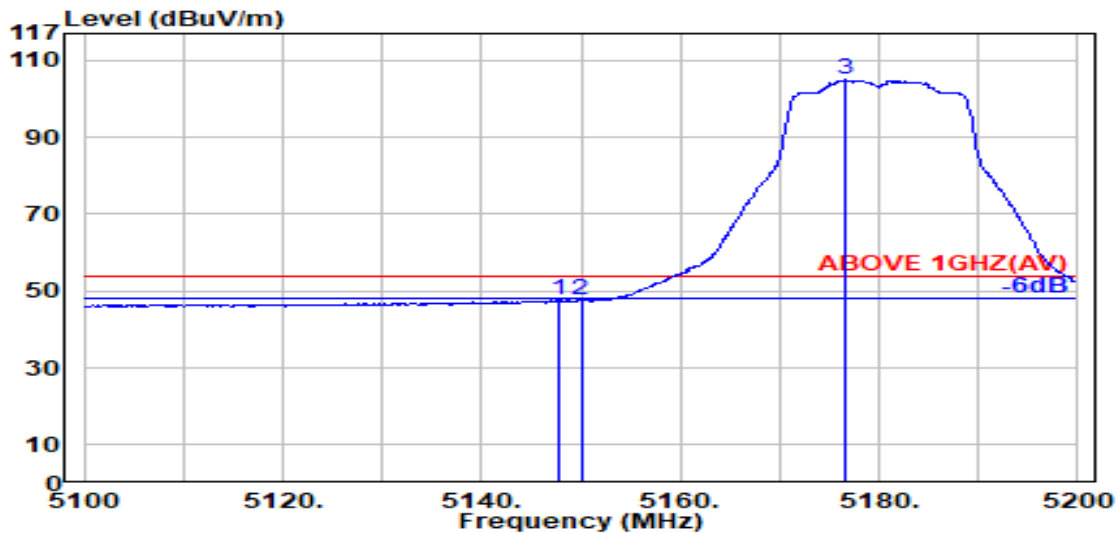


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.700	33.50	8.37	39.19	44.92	47.60	54.00	6.40	Average
5150.000	33.50	8.37	39.19	44.98	47.67	54.00	6.33	Average
@ 5176.500	33.66	8.40	39.19	101.99	104.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

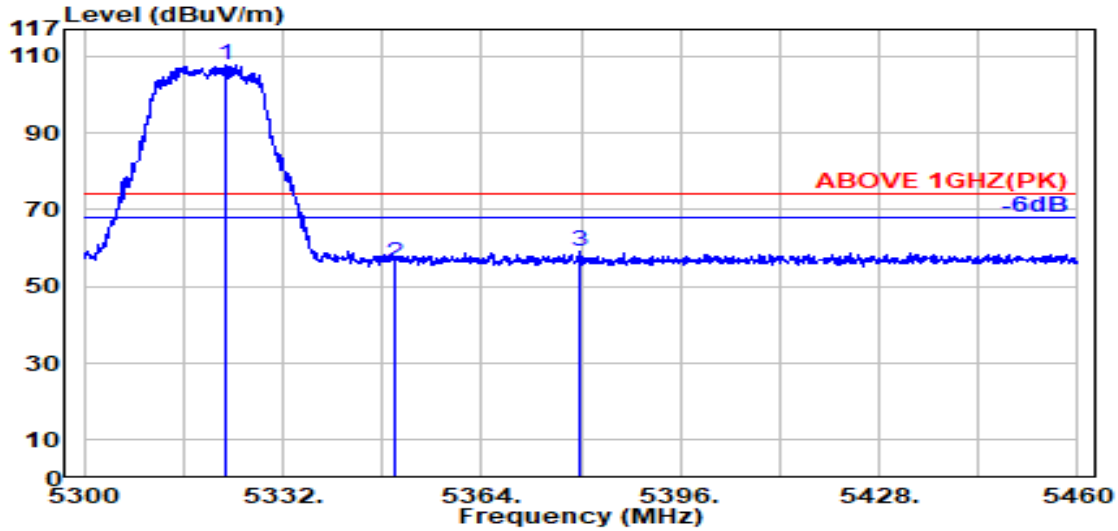

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.800	33.75	8.55	39.17	104.78	107.91	---	---	Peak
5350.000	33.70	8.57	39.17	53.16	56.26	74.00	17.74	Peak
5379.900	33.82	8.60	39.16	55.80	59.06	74.00	14.94	Peak

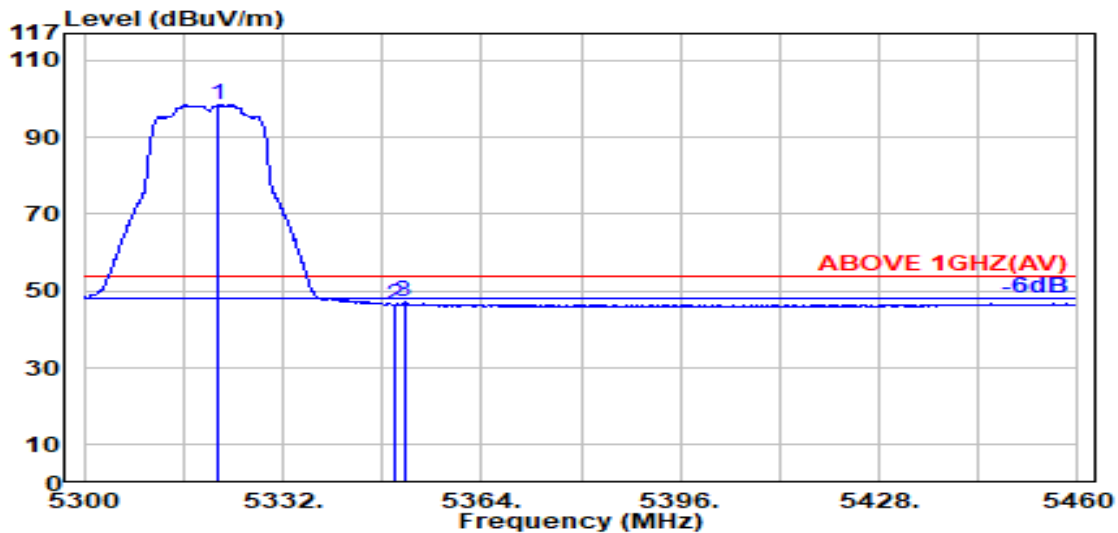


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.400	33.76	8.54	39.17	95.35	98.48	---	---	Average
5350.000	33.70	8.57	39.17	43.40	46.50	54.00	7.50	Average
5351.500	33.71	8.57	39.17	43.97	47.08	54.00	6.92	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

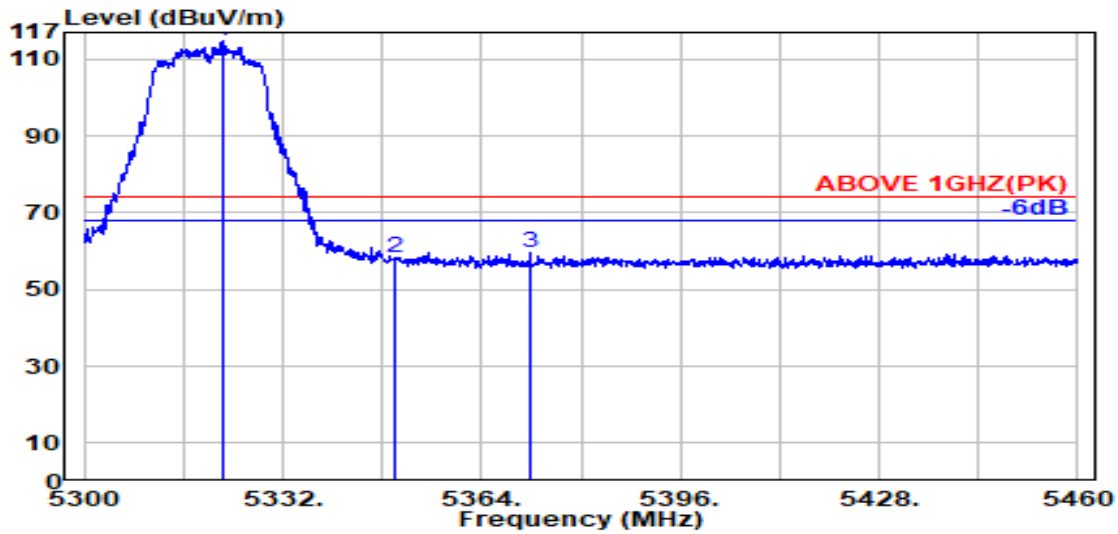

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	33.76	8.55	39.17	111.58	114.71	---	---	Peak
5350.000	33.70	8.57	39.17	55.39	58.50	74.00	15.50	Peak
5371.900	33.79	8.59	39.16	56.57	59.79	74.00	14.21	Peak

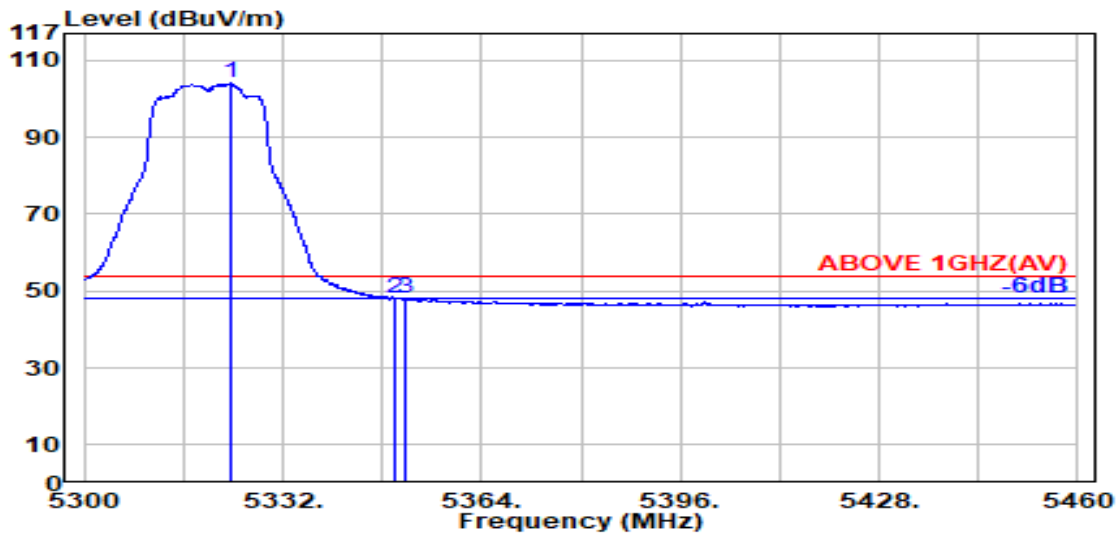


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	33.75	8.55	39.17	100.86	103.99	---	---	Average
5350.000	33.70	8.57	39.17	45.17	48.27	54.00	5.73	Average
5351.900	33.71	8.57	39.17	45.14	48.25	54.00	5.75	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

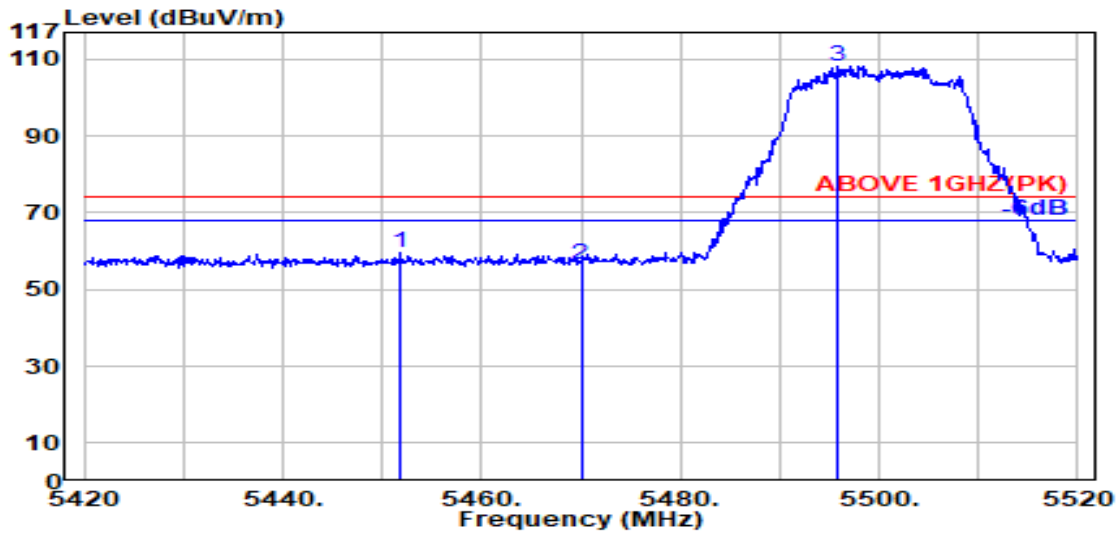

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.900	34.00	8.67	39.16	56.24	59.76	74.00	14.24	Peak
5470.000	34.04	8.69	39.15	53.06	56.63	74.00	17.37	Peak
@ 5495.800	34.09	8.71	39.15	104.61	108.26	---	---	Peak

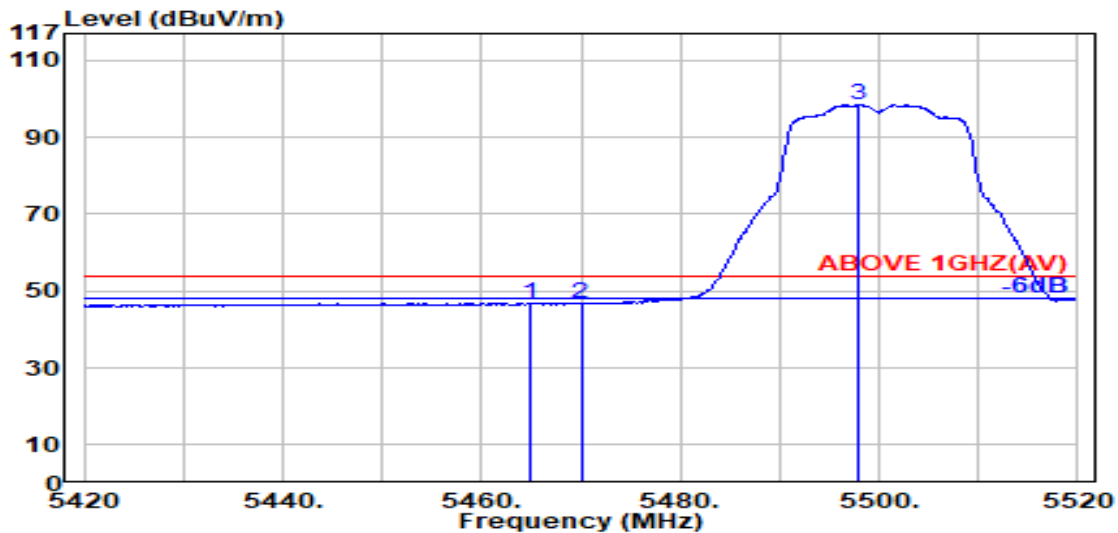


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.03	8.68	39.15	43.28	46.84	54.00	7.16	Average
5470.000	34.04	8.69	39.15	43.13	46.70	54.00	7.30	Average
@ 5497.900	34.10	8.71	39.15	94.87	98.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

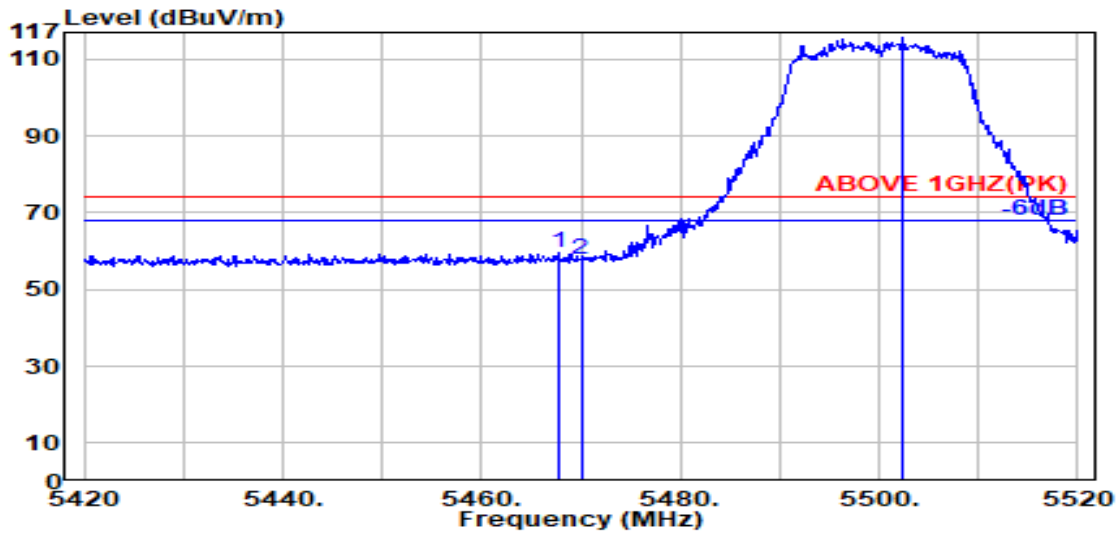

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.15	55.96	59.53	74.00	14.47	Peak
5470.000	34.04	8.69	39.15	54.21	57.79	74.00	16.21	Peak
@ 5502.400	34.10	8.72	39.15	111.93	115.59	---	---	Peak

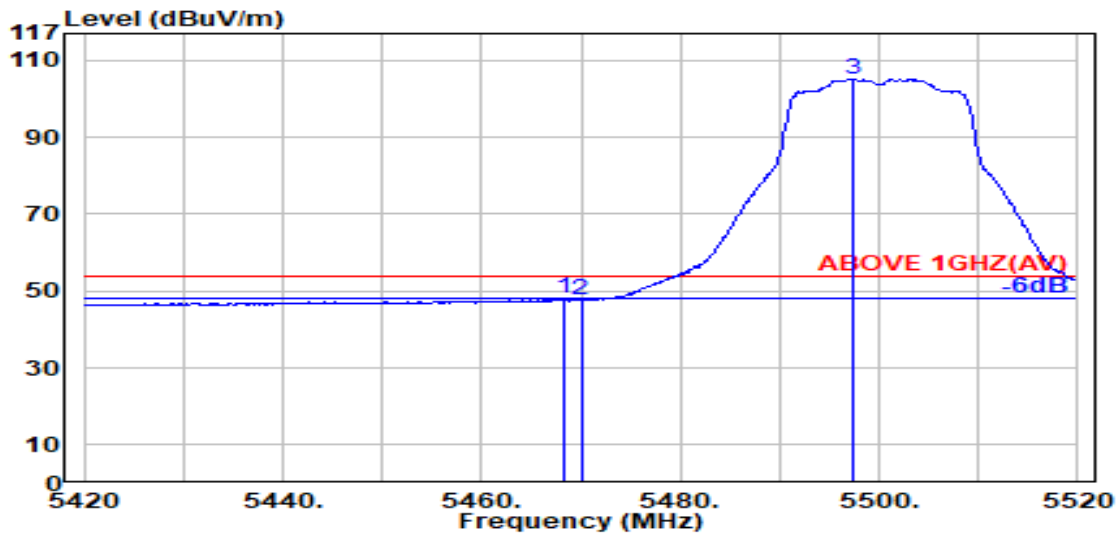


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.15	44.36	47.93	54.00	6.07	Average
5470.000	34.04	8.69	39.15	44.16	47.74	54.00	6.26	Average
@ 5497.400	34.09	8.71	39.15	101.43	105.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

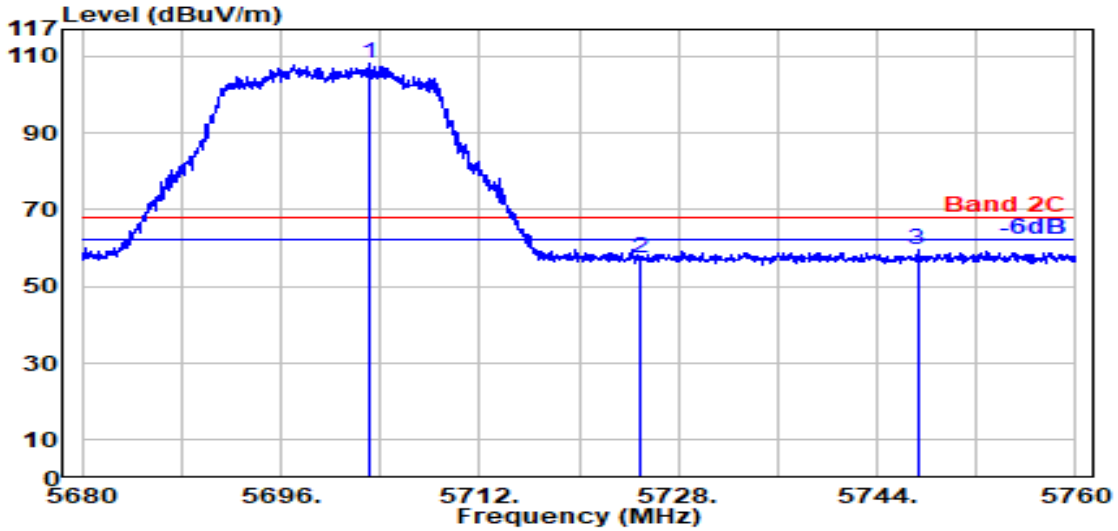

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.050	33.60	8.91	39.19	104.64	107.95	---	---	Peak
5725.000	33.60	8.93	39.20	53.91	57.24	68.20	10.96	Peak
5747.250	33.60	8.95	39.20	56.11	59.45	68.20	8.75	Peak

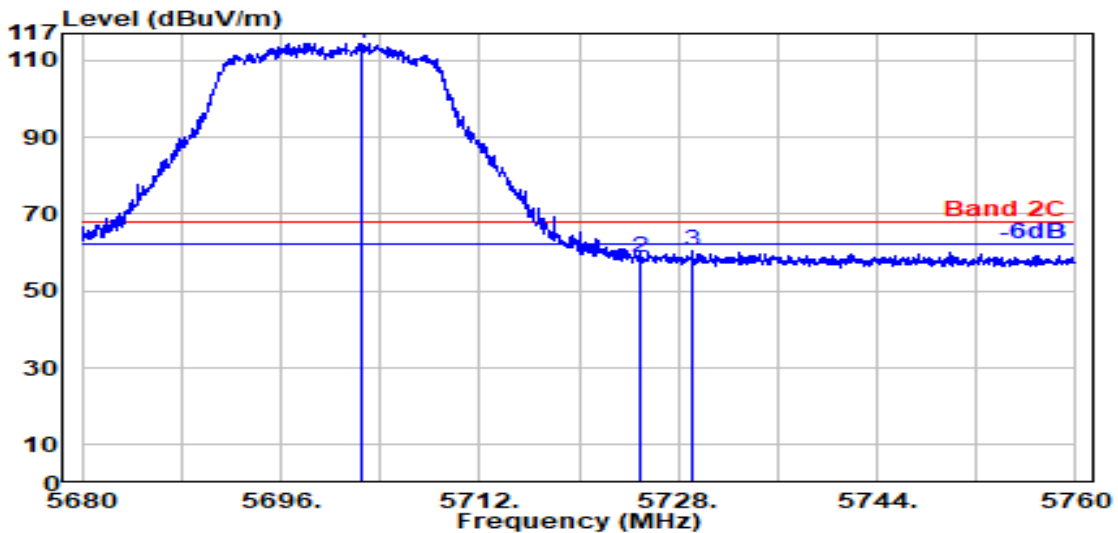


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.500	33.60	8.91	39.19	111.25	114.57	---	---	Peak
5725.000	33.60	8.93	39.20	55.21	58.54	68.20	9.66	Peak
5729.100	33.60	8.93	39.20	57.26	60.59	68.20	7.61	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

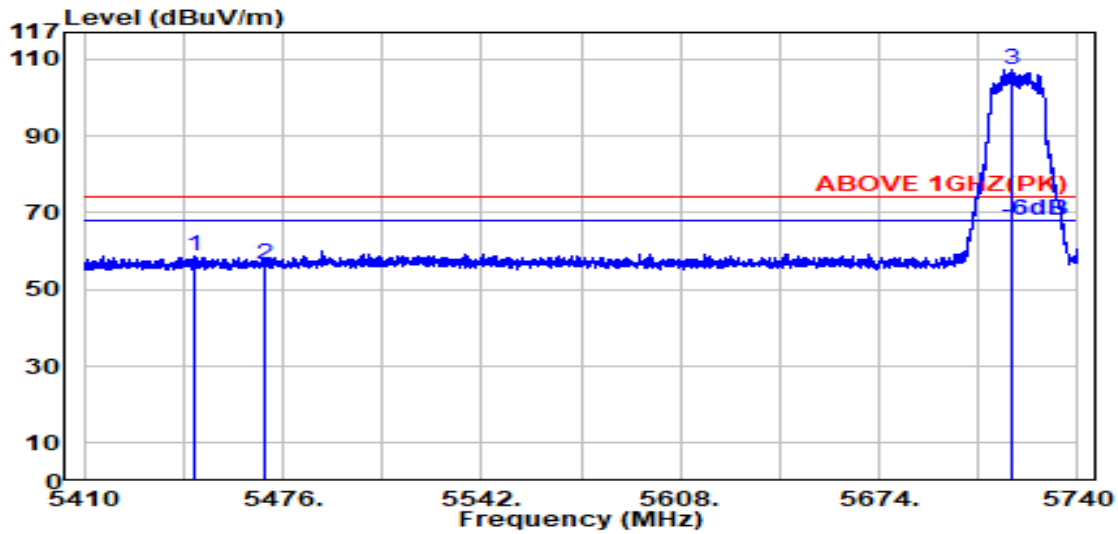

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.600	33.99	8.67	39.16	55.33	58.84	74.00	15.16	Peak
5470.000	34.04	8.69	39.15	52.91	56.49	74.00	17.51	Peak
@ 5718.400	33.60	8.92	39.19	103.95	107.27	---	---	Peak

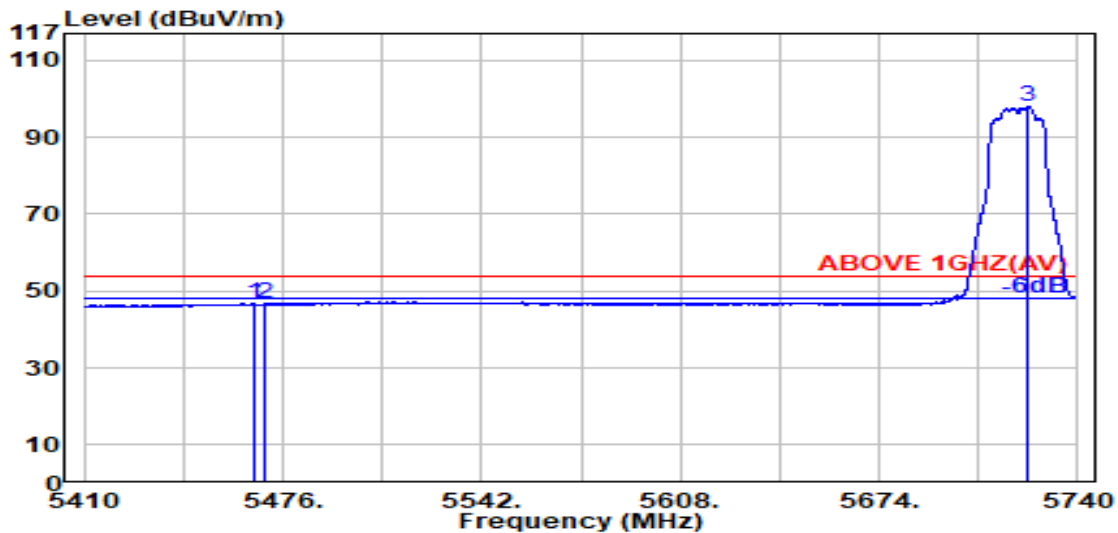


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.03	8.69	39.15	43.11	46.68	54.00	7.32	Average
5470.000	34.04	8.69	39.15	43.01	46.58	54.00	7.42	Average
@ 5723.600	33.60	8.92	39.20	94.55	97.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

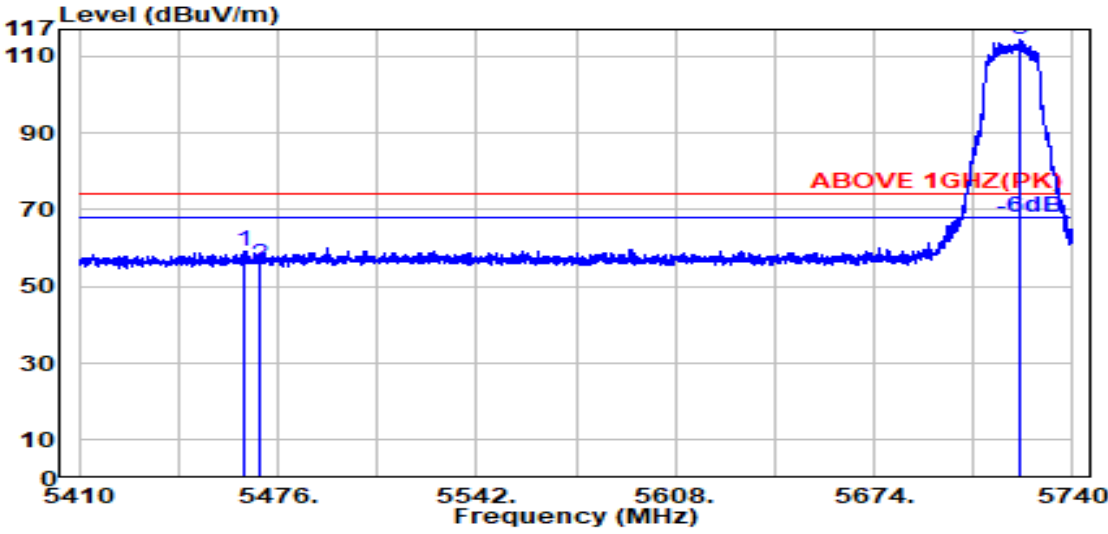

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.03	8.68	39.15	55.50	59.06	74.00	14.94	Peak
5470.000	34.04	8.69	39.15	52.23	55.80	74.00	18.20	Peak
@ 5722.200	33.60	8.92	39.20	111.04	114.37	---	---	Peak

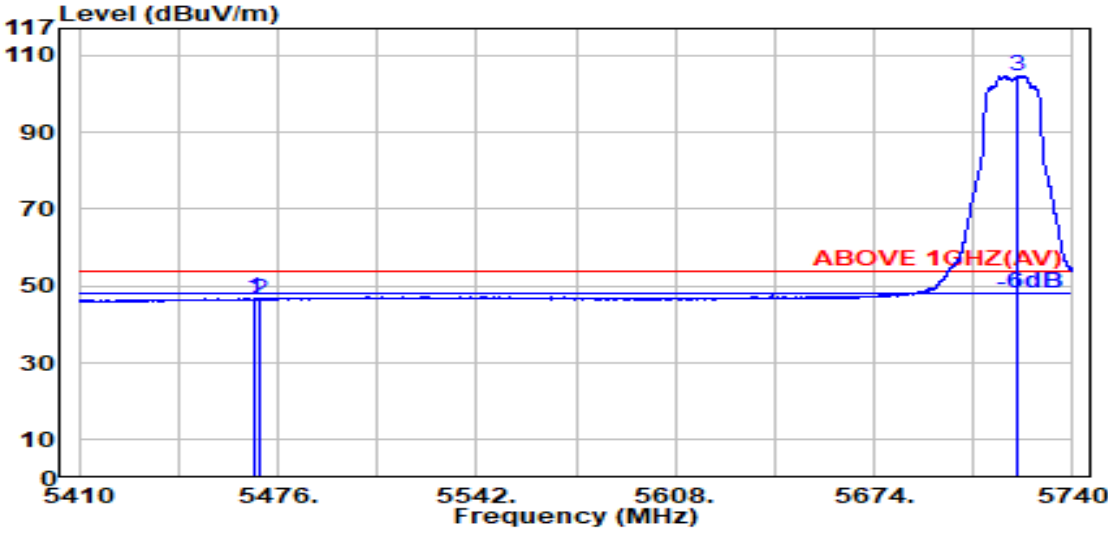


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.04	8.69	39.15	43.17	46.74	54.00	7.26	Average
5470.000	34.04	8.69	39.15	42.87	46.44	54.00	7.56	Average
@ 5721.500	33.60	8.92	39.20	101.39	104.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

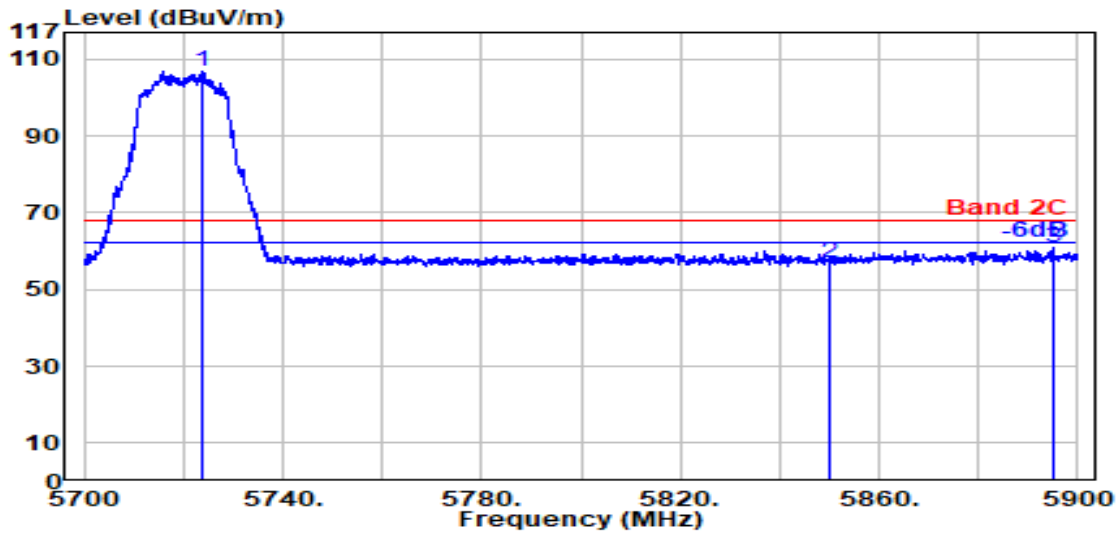

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.600	33.60	8.92	39.20	103.39	106.72	---	---	Peak
5850.000	33.90	9.04	39.22	53.04	56.76	68.20	11.44	Peak
5894.900	34.08	9.08	39.23	56.94	60.87	68.20	7.33	Peak

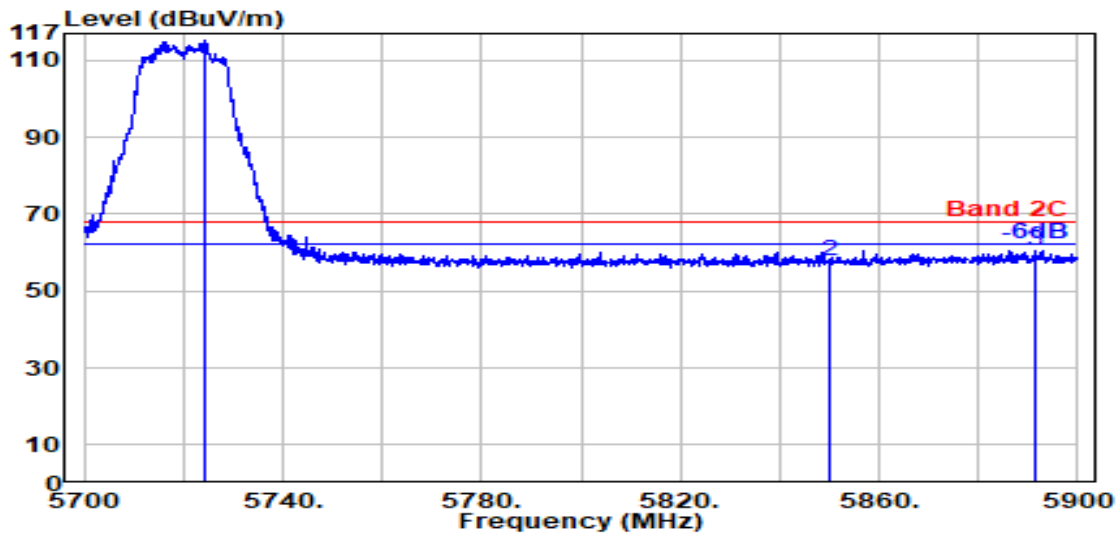


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.100	33.60	8.92	39.20	111.80	115.13	---	---	Peak
5850.000	33.90	9.04	39.22	54.17	57.89	68.20	10.31	Peak
5891.300	34.07	9.07	39.23	56.73	60.64	68.20	7.56	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

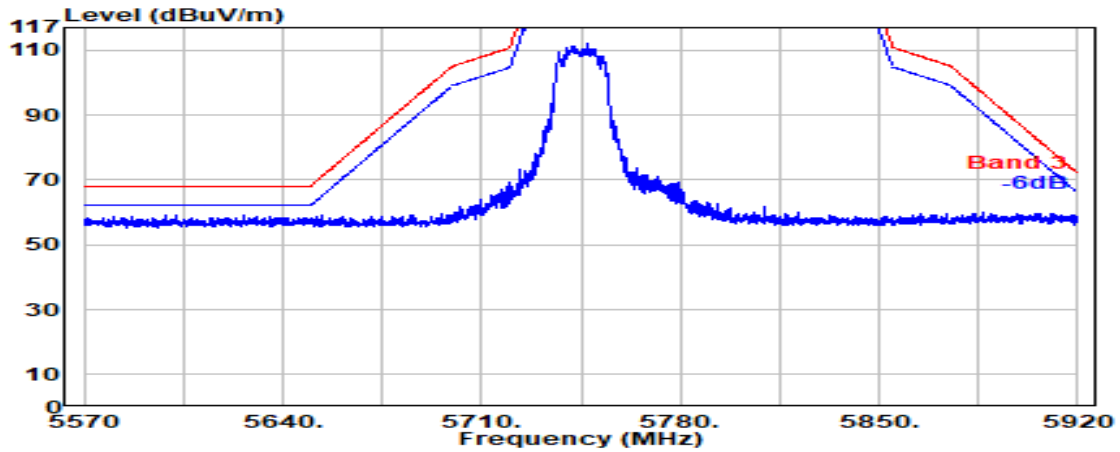


Antenna at Vertical Polarization

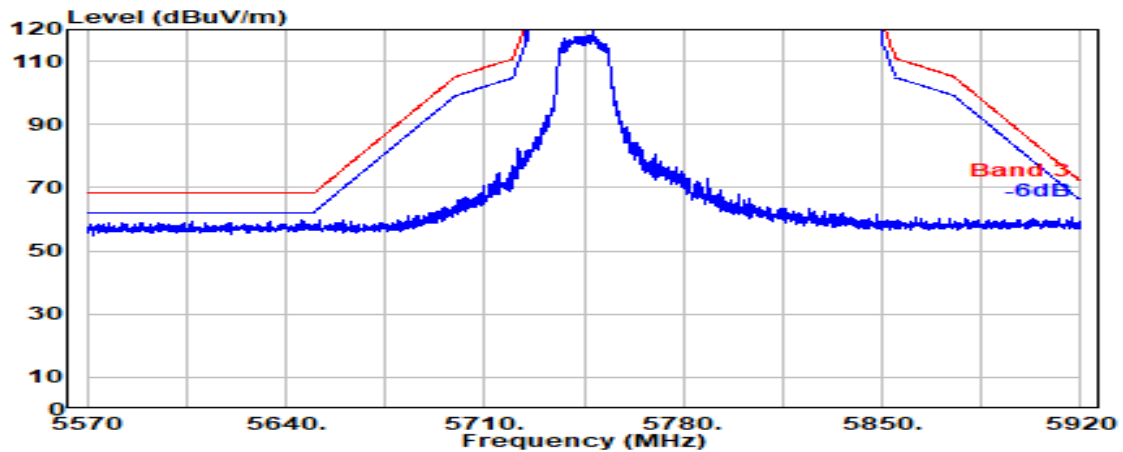


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

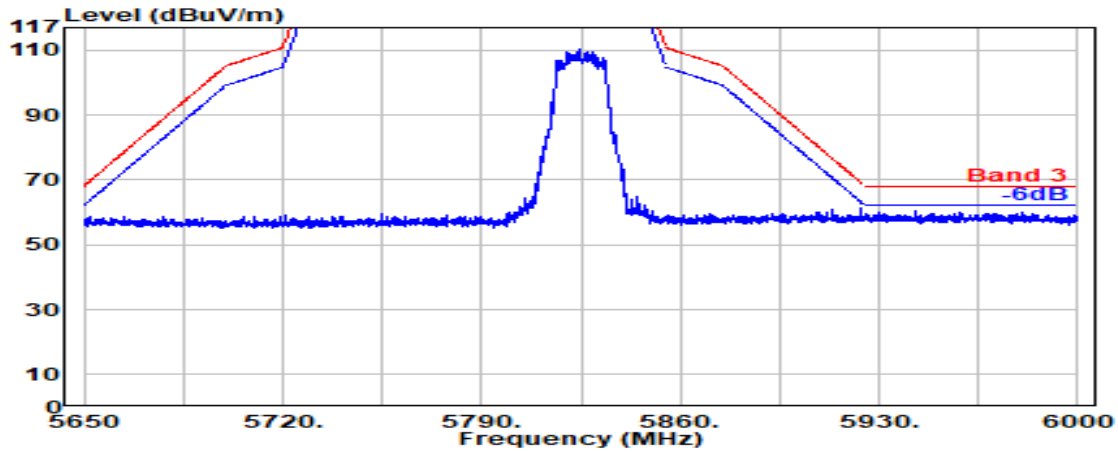

Antenna at Vertical Polarization

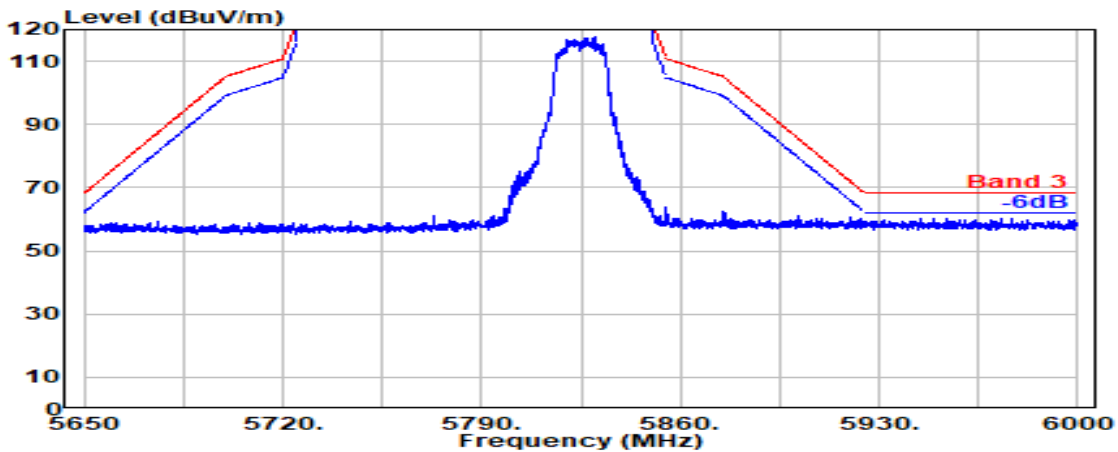


Mode	802.11n-HT20	U-NII Band	4
		Frequency	TX 5885MHz

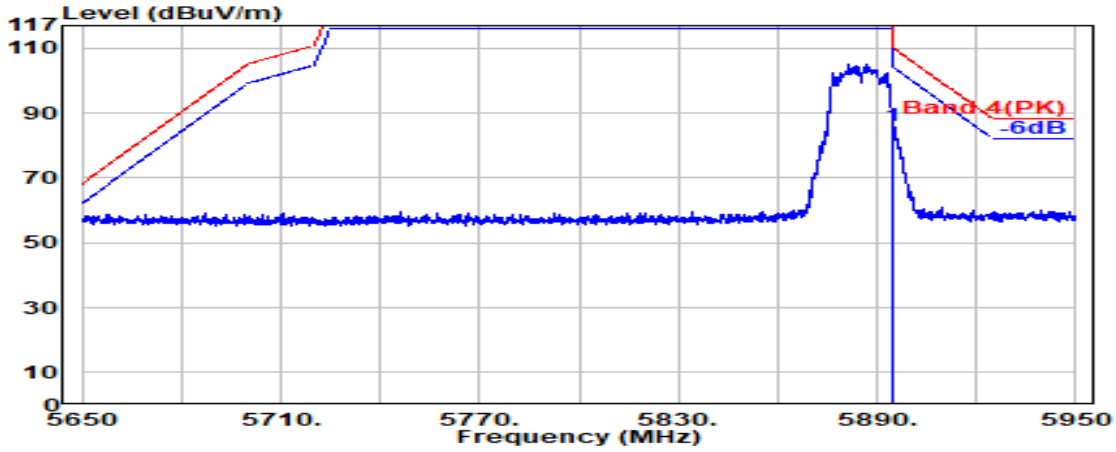

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	82.05	85.98	110.20	24.22	Peak

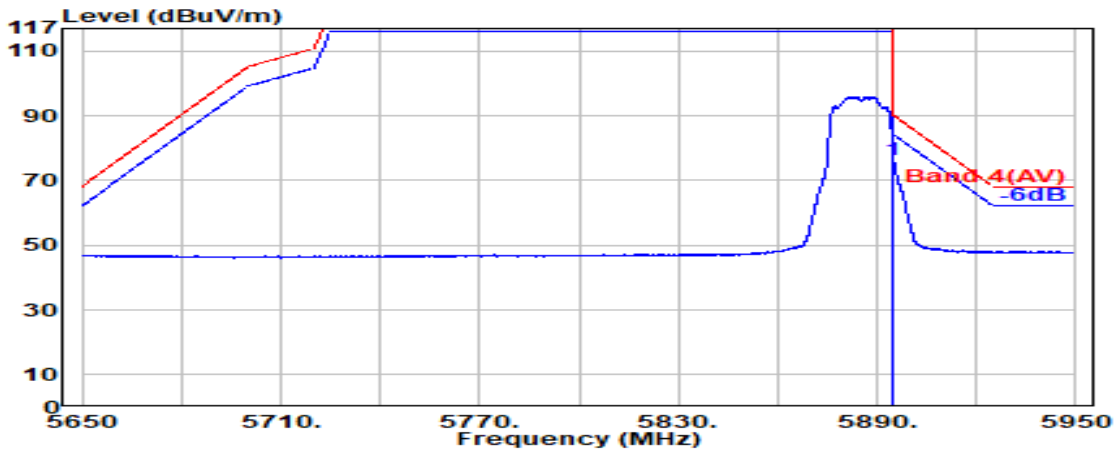


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	72.33	76.26	90.20	13.94	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11n-HT20	U-NII Band	4
		Frequency	TX 5885MHz

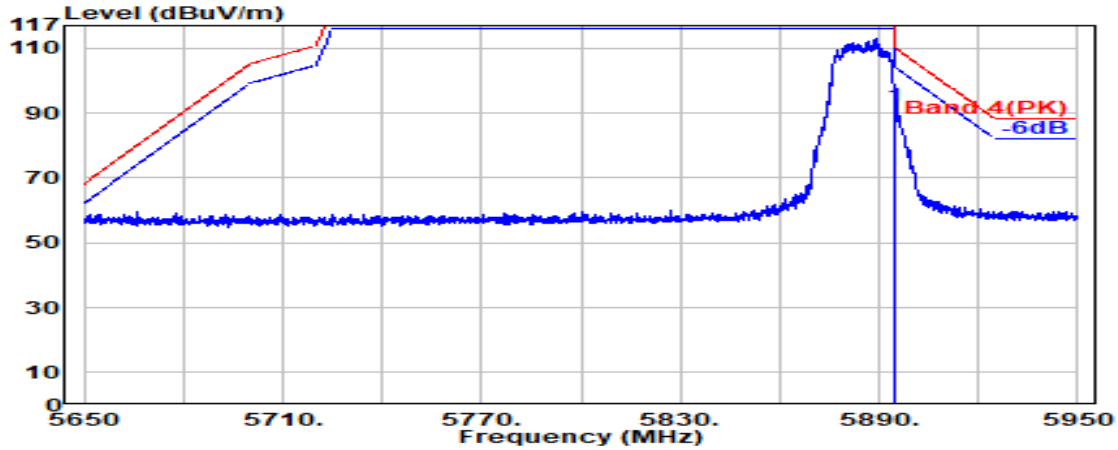

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	88.56	92.49	110.20	17.71	Peak

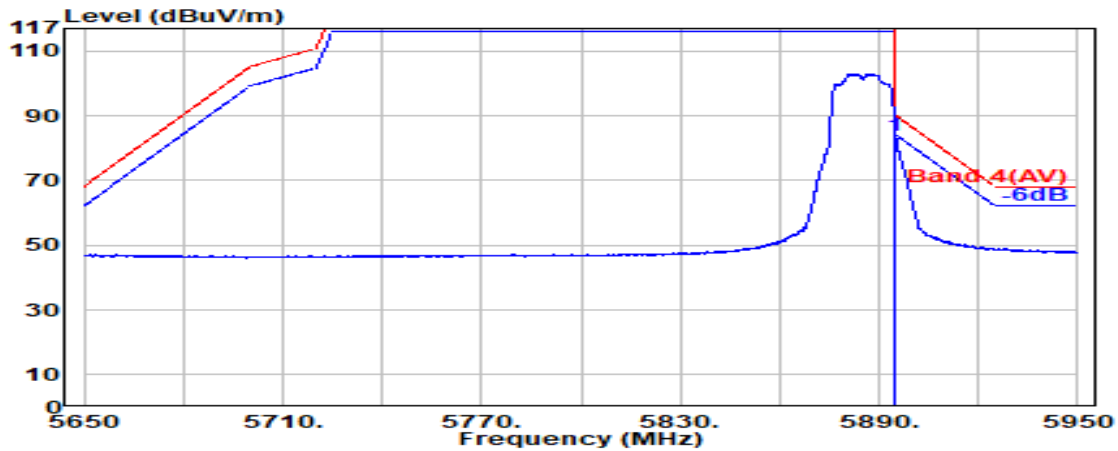


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	79.79	83.71	90.20	6.49	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

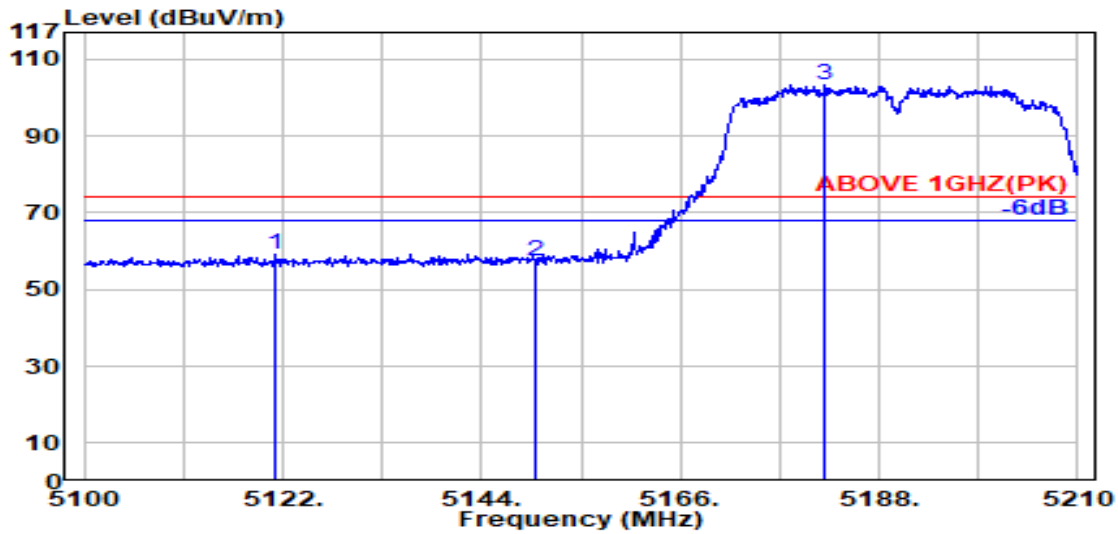

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.200	33.44	8.34	39.19	56.76	59.36	74.00	14.64	Peak
5150.000	33.50	8.37	39.19	54.76	57.44	74.00	16.56	Peak
@ 5182.000	33.69	8.41	39.19	100.34	103.25	---	---	Peak

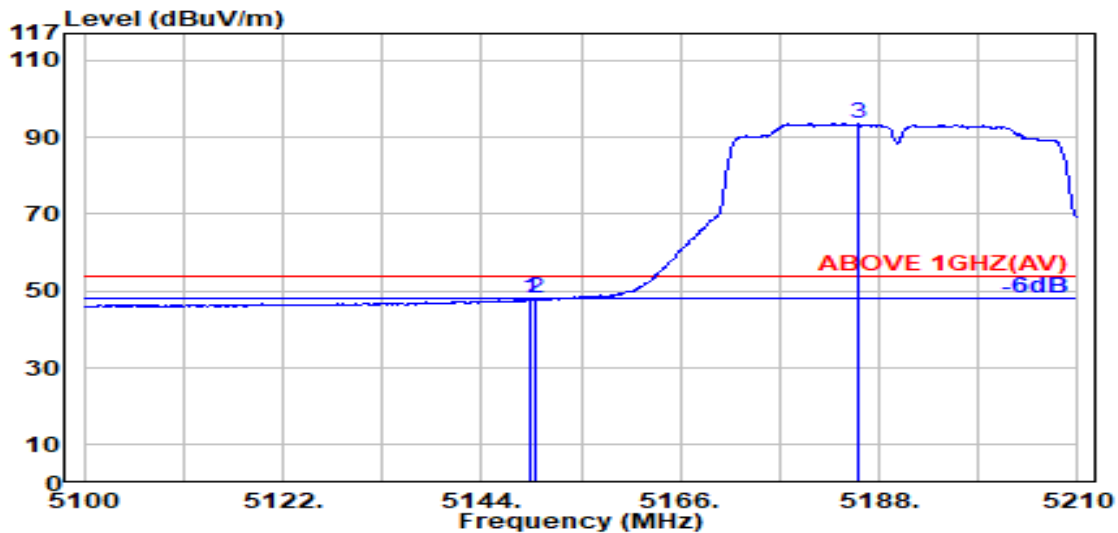


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	45.35	48.04	54.00	5.96	Average
5150.000	33.50	8.37	39.19	45.28	47.96	54.00	6.04	Average
@ 5185.600	33.71	8.41	39.19	90.67	93.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

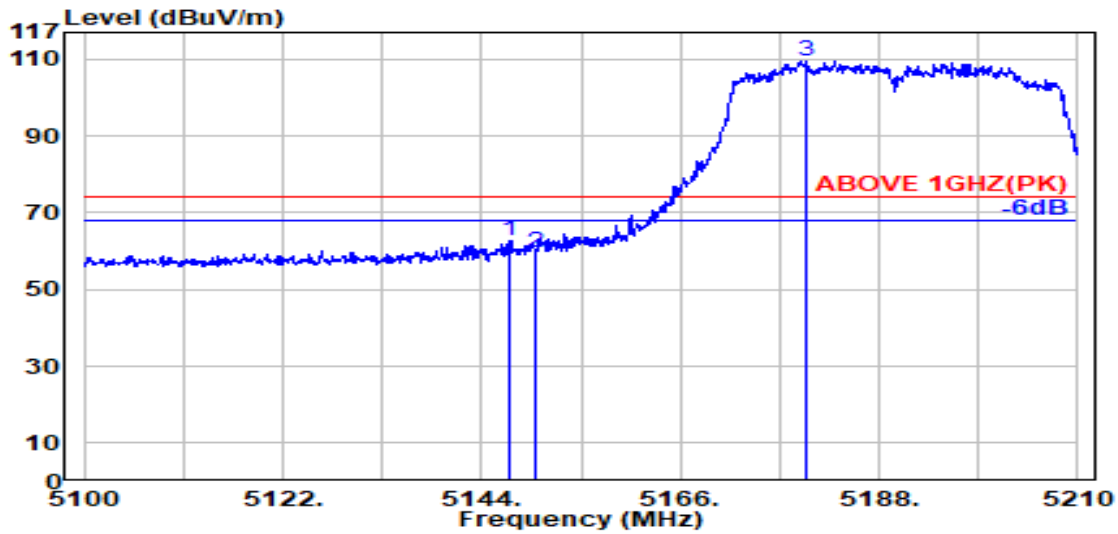

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.49	8.37	39.19	60.10	62.77	74.00	11.23	Peak
5150.000	33.50	8.37	39.19	57.01	59.69	74.00	14.31	Peak
@ 5180.000	33.68	8.40	39.19	106.71	109.60	---	---	Peak

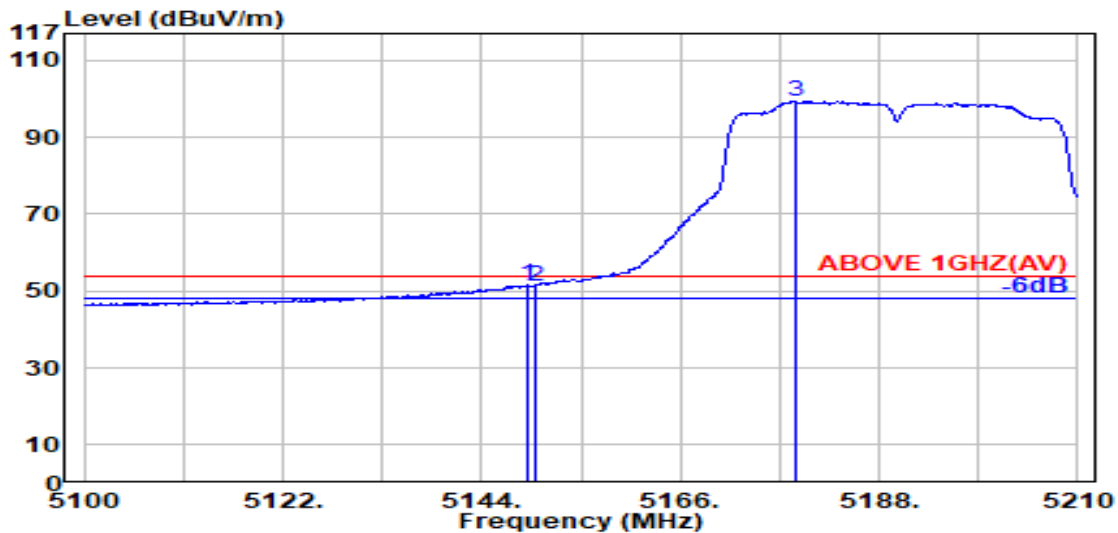


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.50	8.37	39.19	48.76	51.44	54.00	2.56	Average
5150.000	33.50	8.37	39.19	48.72	51.40	54.00	2.60	Average
@ 5178.800	33.67	8.40	39.19	96.44	99.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

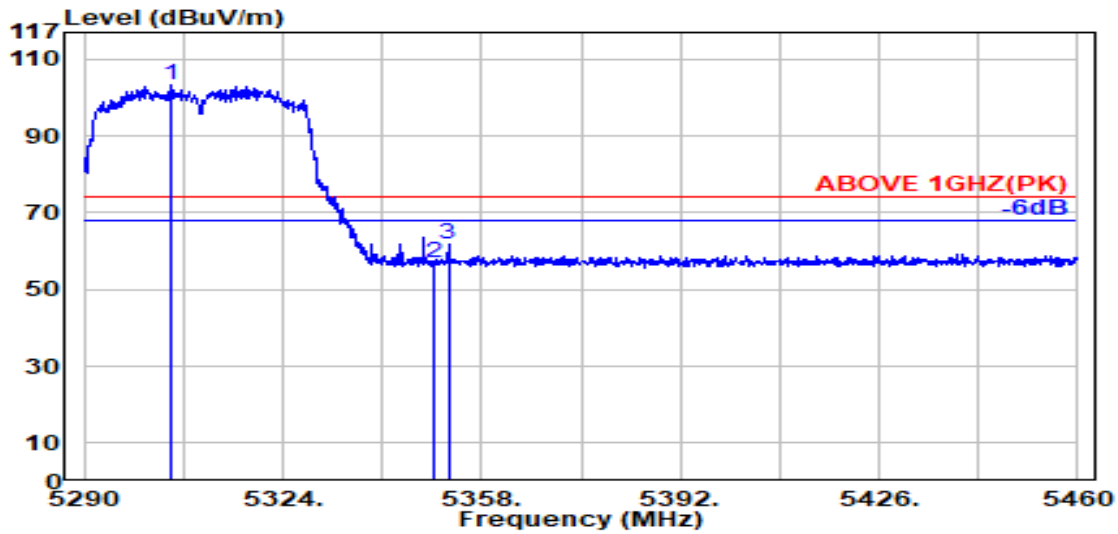

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.700	33.79	8.53	39.17	100.07	103.21	---	---	Peak
5350.000	33.70	8.57	39.17	53.90	57.01	74.00	16.99	Peak
5352.300	33.71	8.57	39.17	58.53	61.65	74.00	12.35	Peak

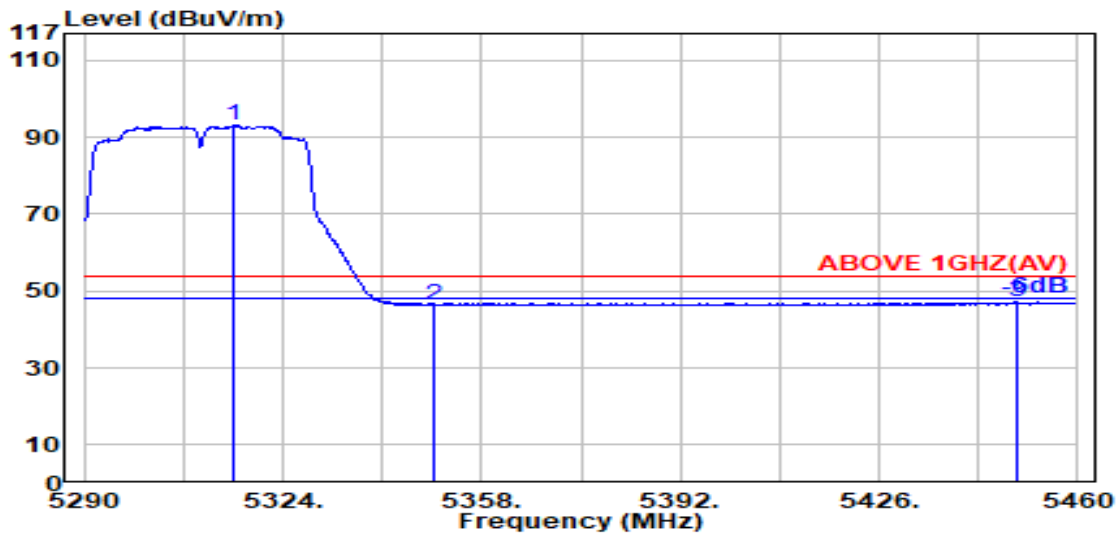


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.600	33.77	8.54	39.17	89.94	93.08	---	---	Average
5350.000	33.70	8.57	39.17	43.45	46.56	54.00	7.44	Average
5449.400	34.00	8.67	39.16	43.54	47.05	54.00	6.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

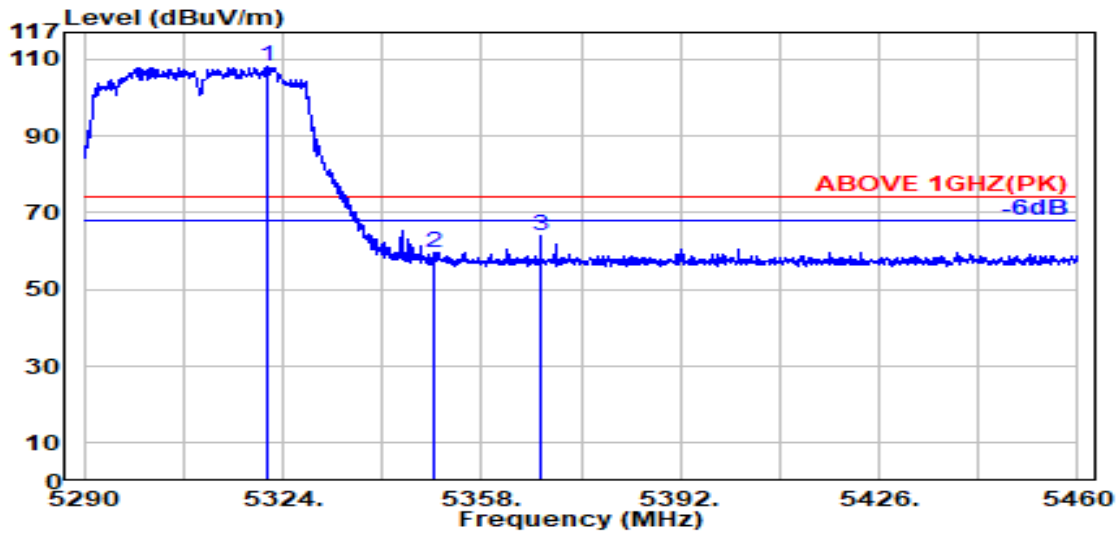

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.300	33.76	8.54	39.17	104.95	108.08	---	---	Peak
5350.000	33.70	8.57	39.17	56.57	59.68	74.00	14.32	Peak
5368.000	33.77	8.59	39.17	60.71	63.91	74.00	10.09	Peak

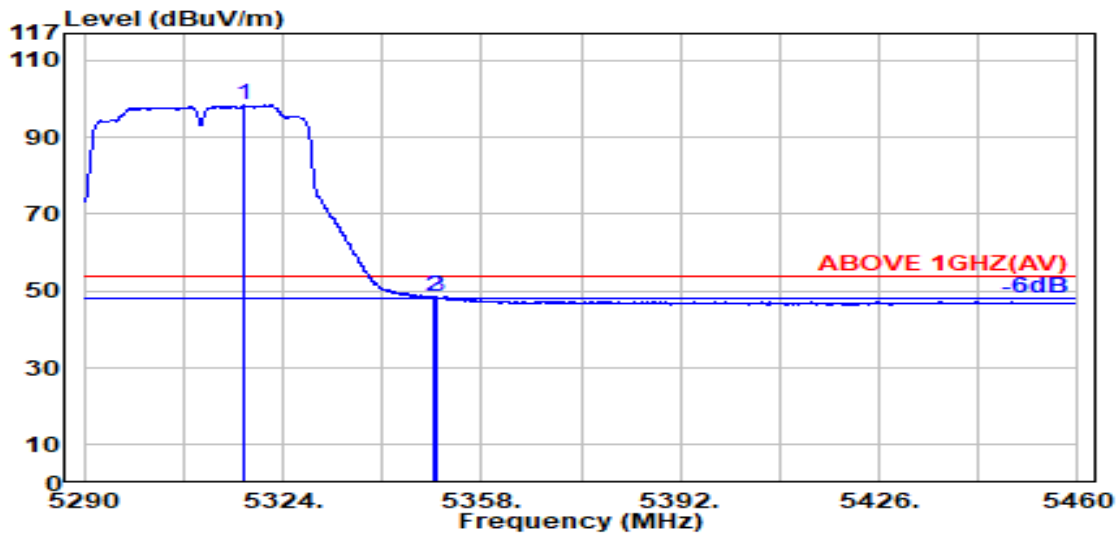


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.400	33.77	8.54	39.17	95.29	98.42	---	---	Average
5350.000	33.70	8.57	39.17	45.28	48.39	54.00	5.61	Average
5350.400	33.70	8.57	39.17	45.42	48.52	54.00	5.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

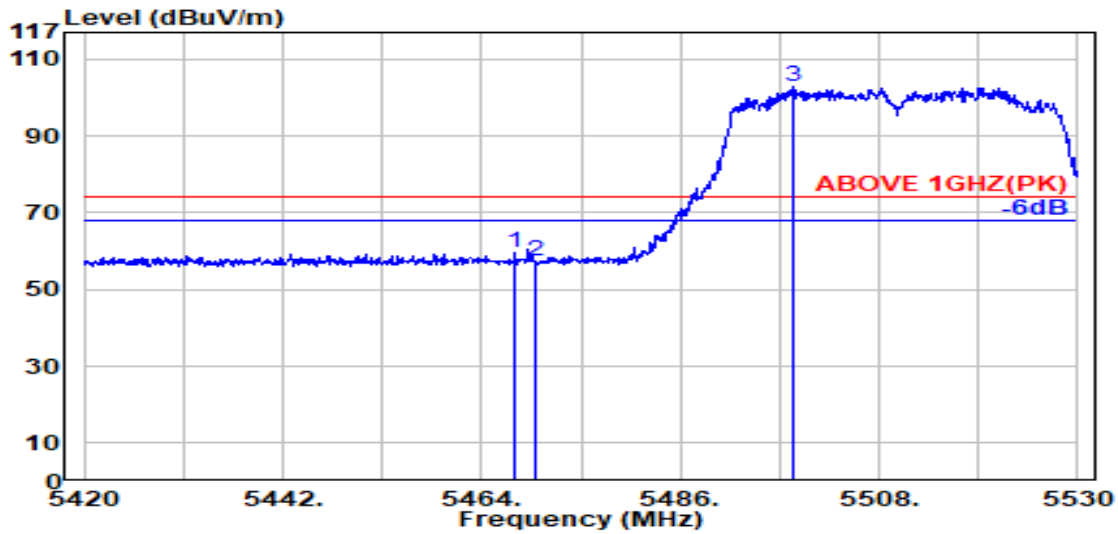

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.15	56.14	59.71	74.00	14.29	Peak
5470.000	34.04	8.69	39.15	53.67	57.25	74.00	16.75	Peak
@ 5498.400	34.10	8.72	39.15	99.23	102.89	---	---	Peak

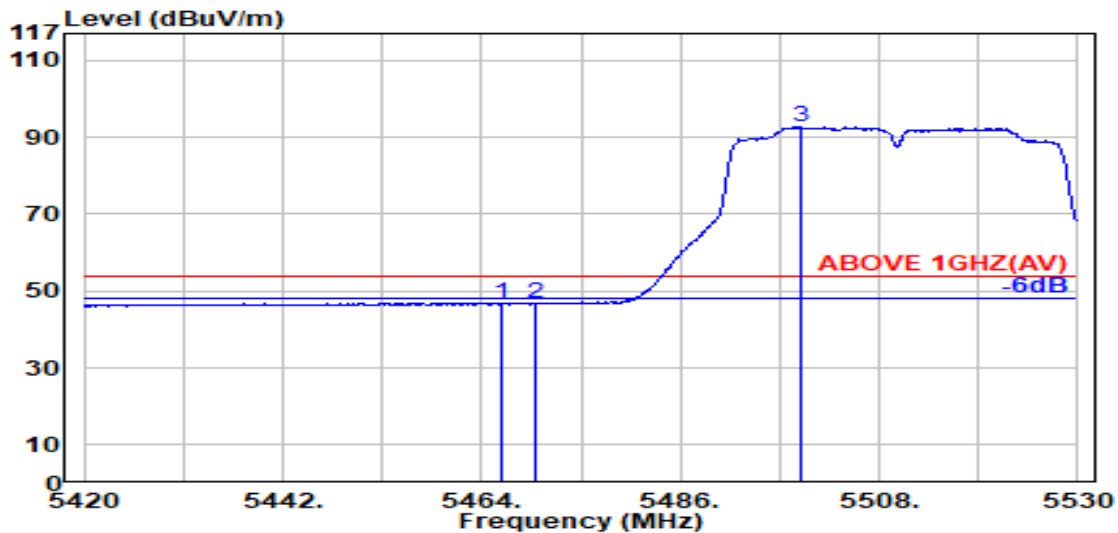


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.03	8.68	39.15	43.36	46.92	54.00	7.08	Average
5470.000	34.04	8.69	39.15	43.28	46.85	54.00	7.15	Average
@ 5499.400	34.10	8.72	39.15	89.08	92.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

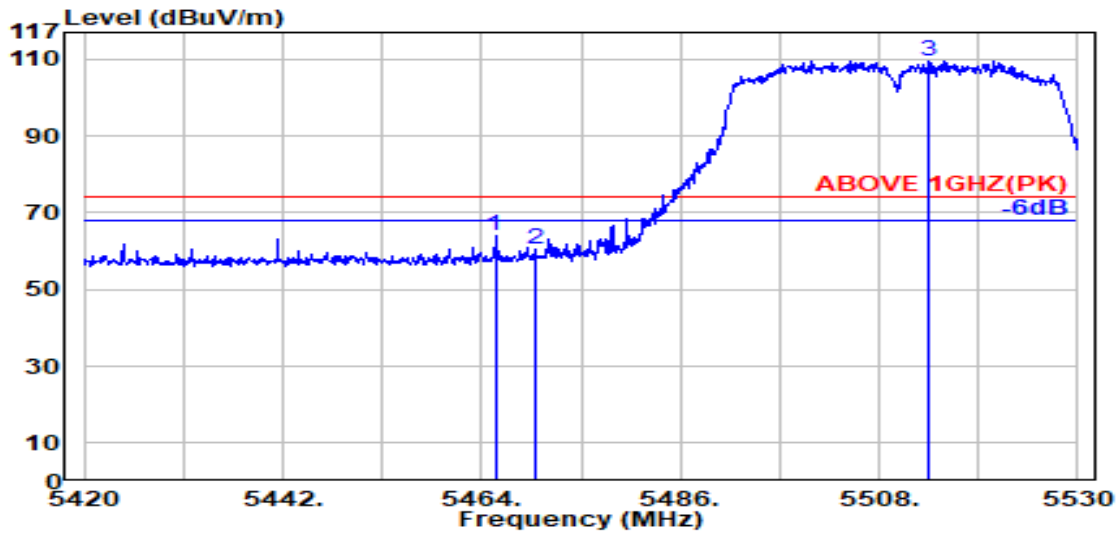

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.15	60.61	64.17	74.00	9.83	Peak
5470.000	34.04	8.69	39.15	56.89	60.46	74.00	13.54	Peak
@ 5513.600	34.07	8.73	39.15	105.86	109.51	---	---	Peak

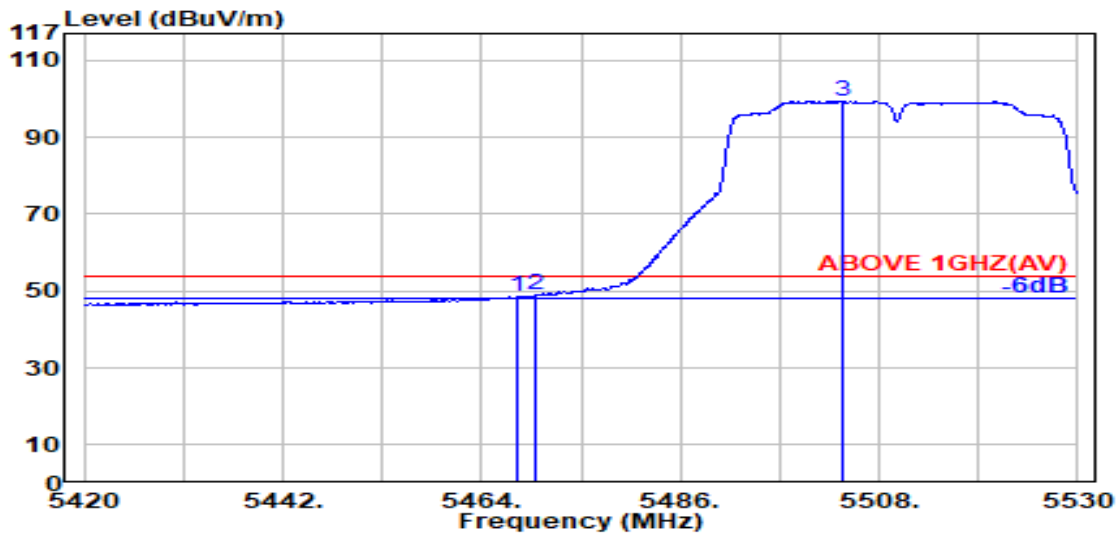


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	45.13	48.70	54.00	5.30	Average
5470.000	34.04	8.69	39.15	45.41	48.99	54.00	5.01	Average
@ 5504.000	34.09	8.72	39.15	95.69	99.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

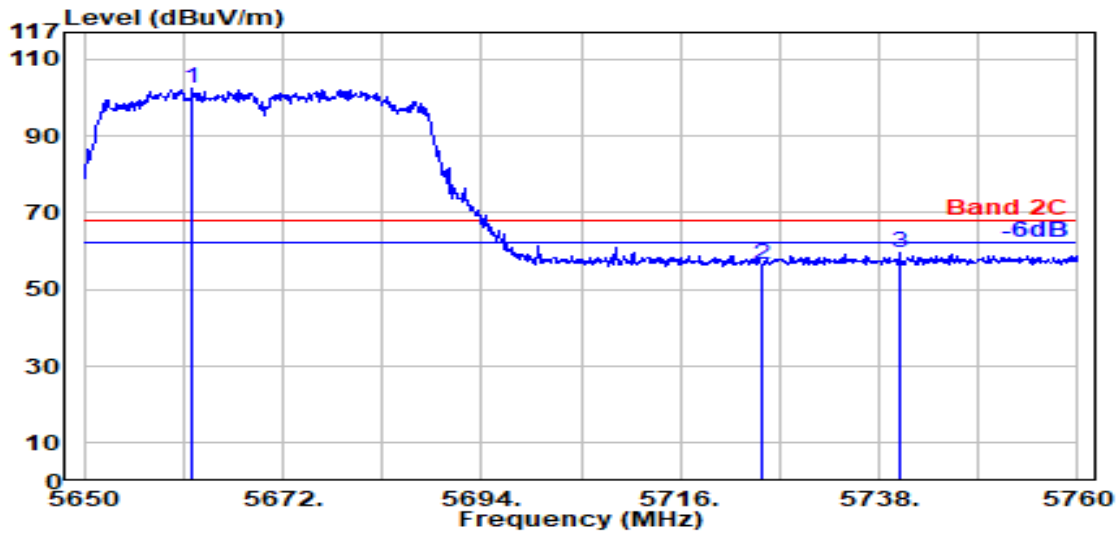

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.000	33.75	8.87	39.18	99.19	102.62	---	---	Peak
5725.000	33.60	8.93	39.20	53.39	56.72	68.20	11.48	Peak
5740.200	33.60	8.94	39.20	56.20	59.54	68.20	8.66	Peak

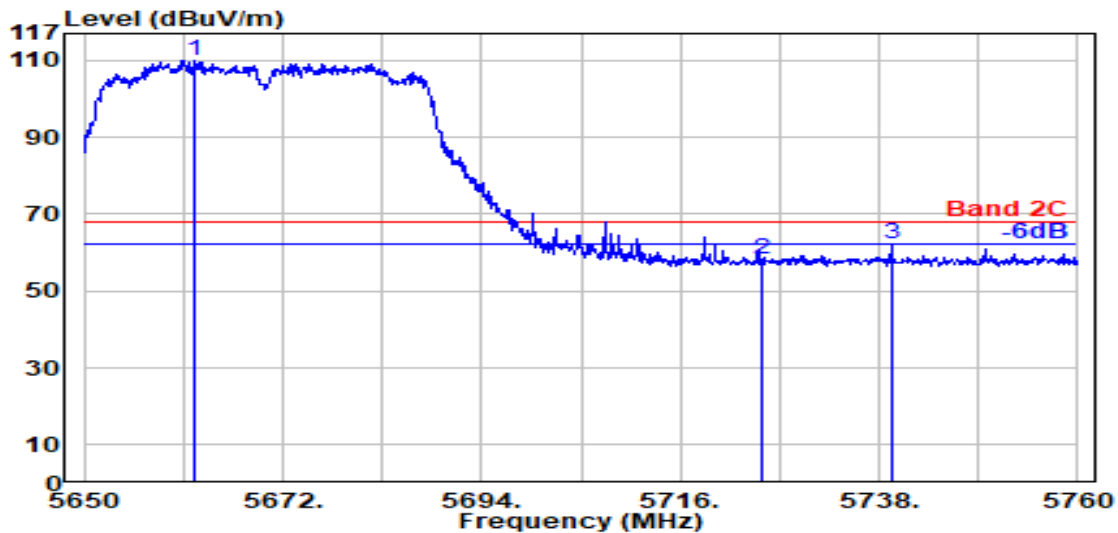


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.300	33.75	8.87	39.18	106.59	110.03	---	---	Peak
5725.000	33.60	8.93	39.20	55.12	58.45	68.20	9.75	Peak
5739.400	33.60	8.94	39.20	59.00	62.34	68.20	5.86	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

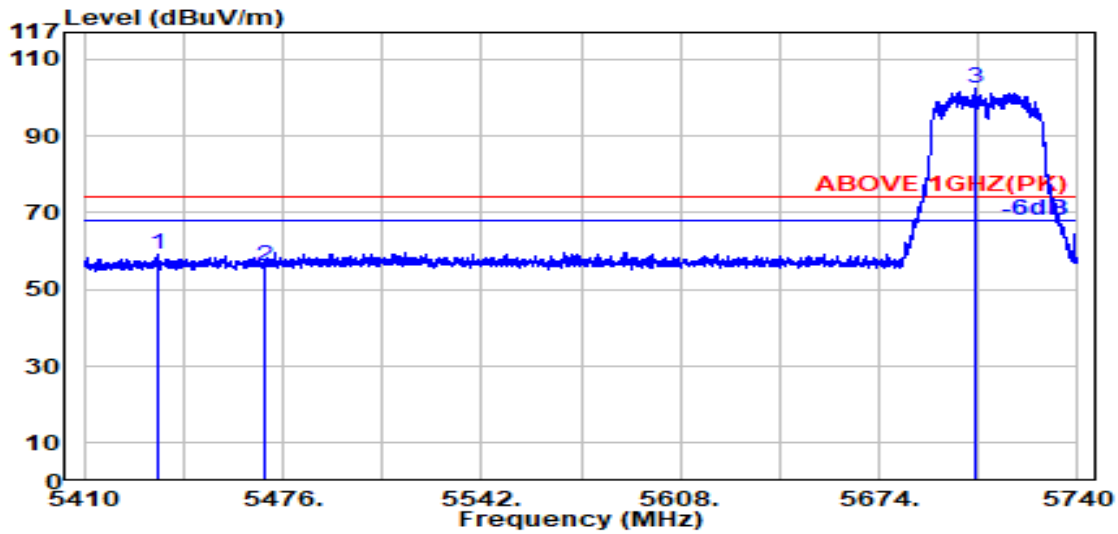

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.700	33.97	8.65	39.16	55.54	59.00	74.00	15.00	Peak
5470.000	34.04	8.69	39.15	52.53	56.10	74.00	17.90	Peak
@ 5705.700	33.60	8.91	39.19	99.05	102.37	---	---	Peak

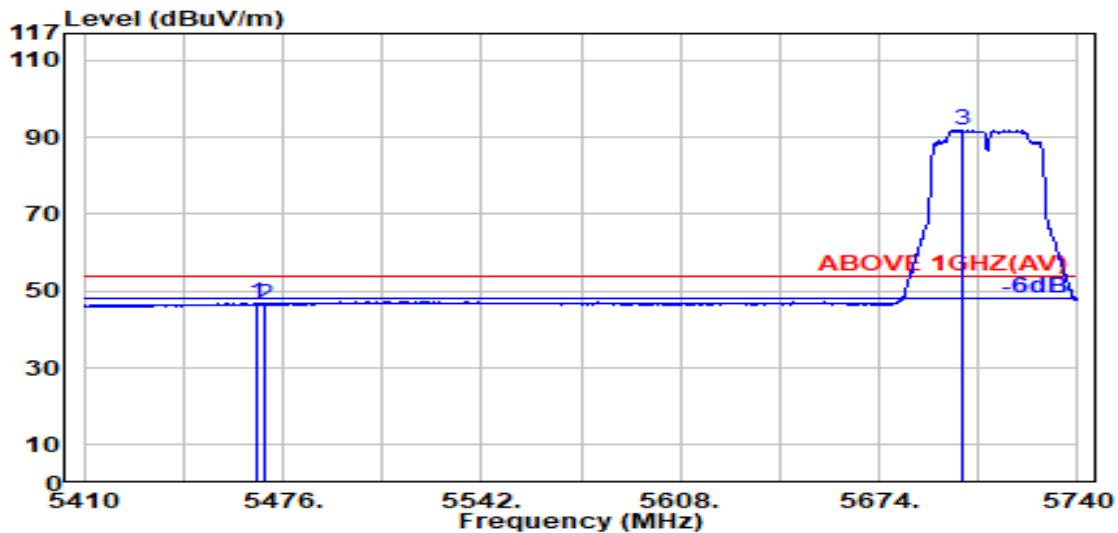


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.03	8.69	39.15	43.19	46.75	54.00	7.25	Average
5470.000	34.04	8.69	39.15	42.82	46.40	54.00	7.60	Average
@ 5701.300	33.60	8.90	39.19	88.52	91.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

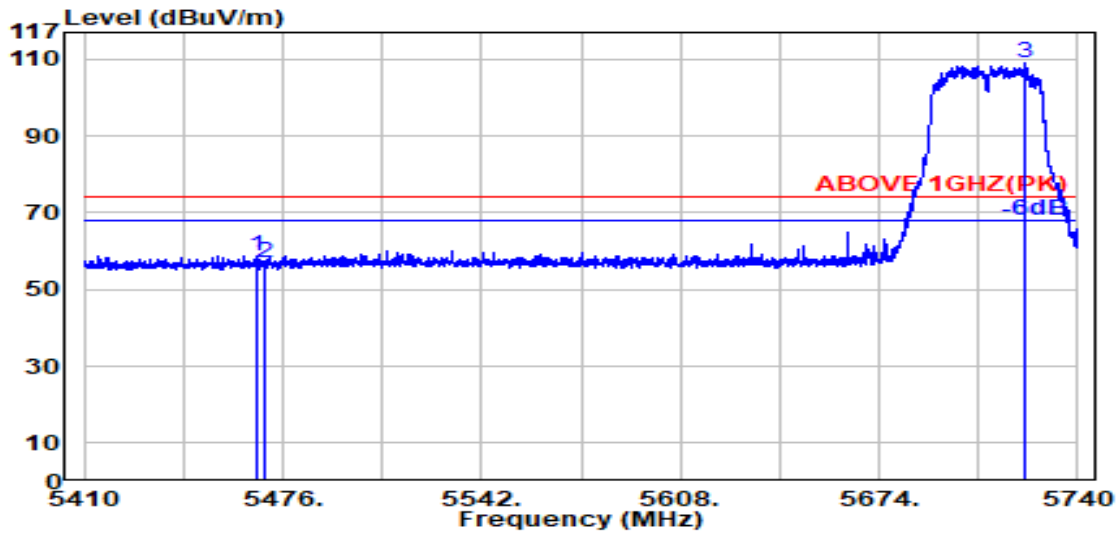

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.15	55.26	58.82	74.00	15.18	Peak
5470.000	34.04	8.69	39.15	53.40	56.98	74.00	17.02	Peak
@ 5722.200	33.60	8.92	39.20	105.61	108.94	---	---	Peak

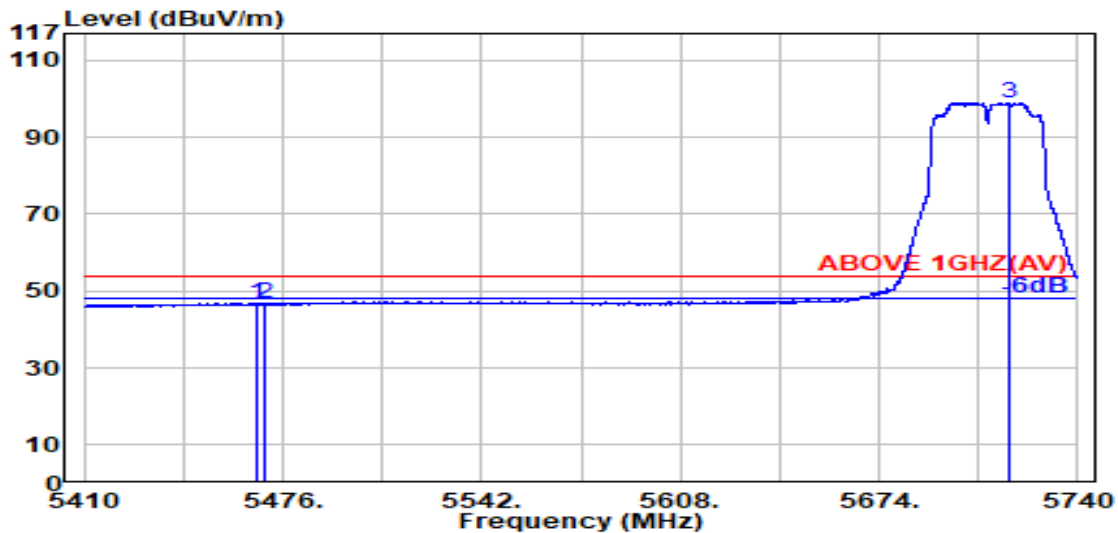


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.03	8.69	39.15	43.38	46.95	54.00	7.05	Average
5470.000	34.04	8.69	39.15	43.18	46.76	54.00	7.24	Average
@ 5716.900	33.60	8.92	39.19	95.71	99.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

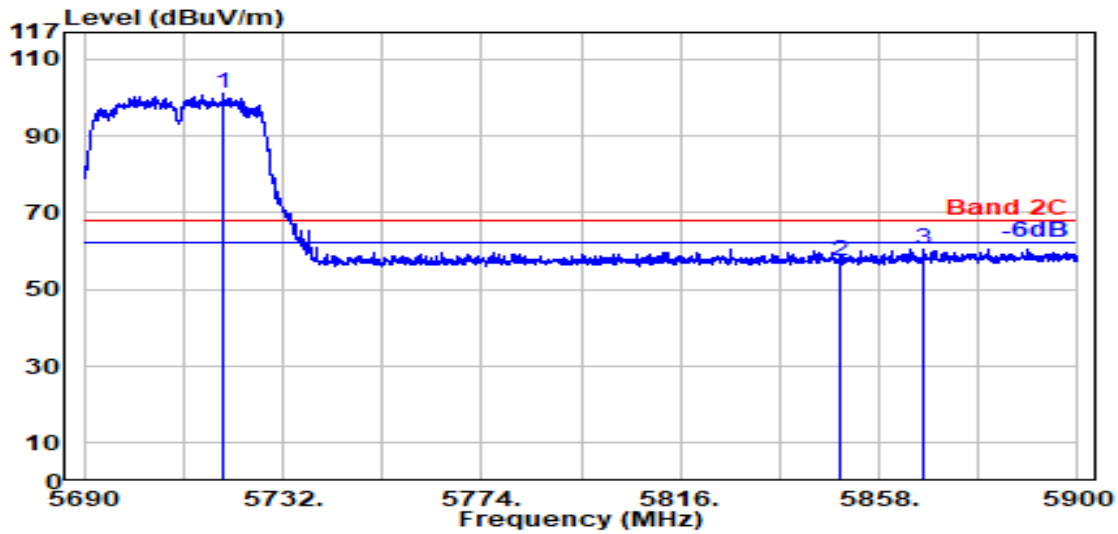

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.600	33.60	8.92	39.20	97.69	101.02	---	---	Peak
5850.000	33.90	9.04	39.22	53.63	57.35	68.20	10.85	Peak
5867.400	33.97	9.05	39.22	56.74	60.54	68.20	7.66	Peak

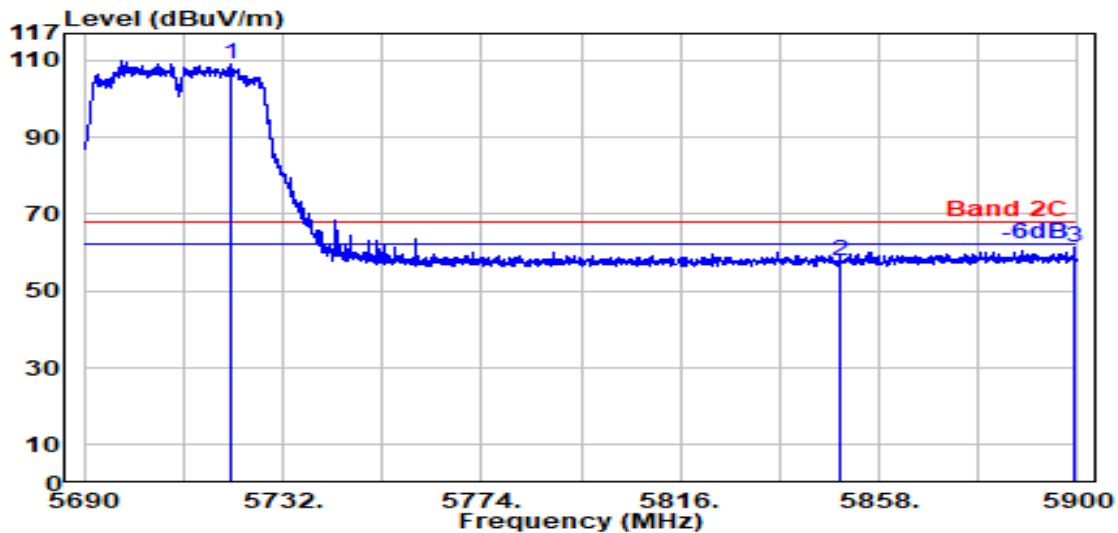


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.000	33.60	8.92	39.20	105.85	109.17	---	---	Peak
5850.000	33.90	9.04	39.22	54.34	58.05	68.20	10.15	Peak
5899.300	34.10	9.08	39.23	57.33	61.28	68.20	6.92	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

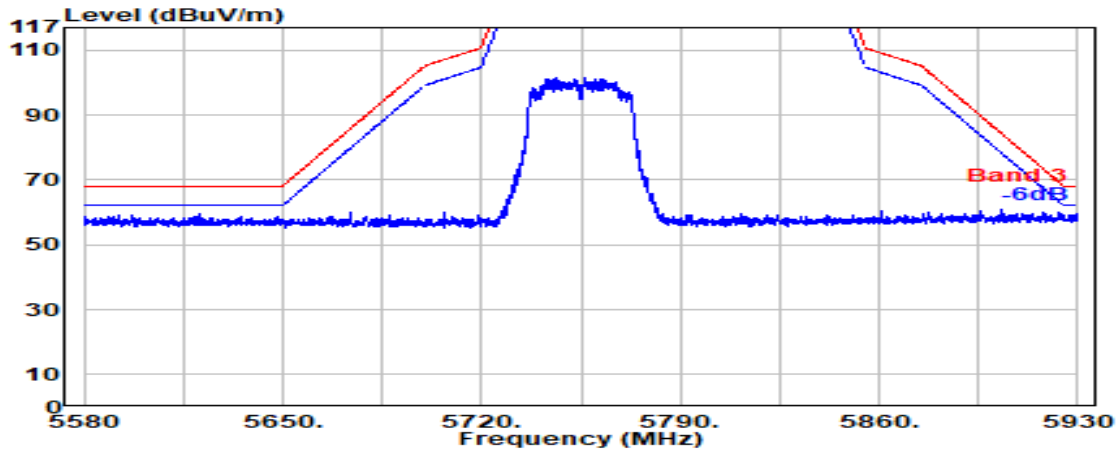


Antenna at Vertical Polarization

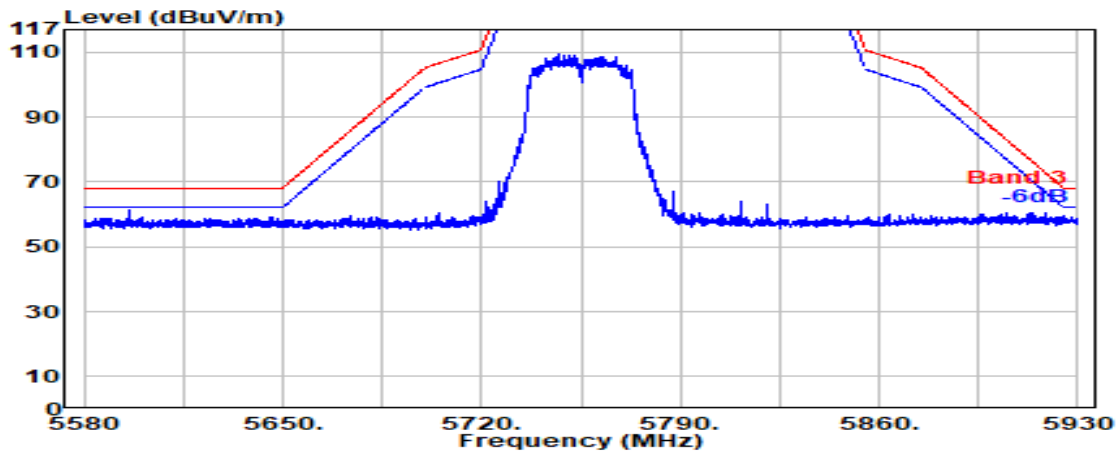


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

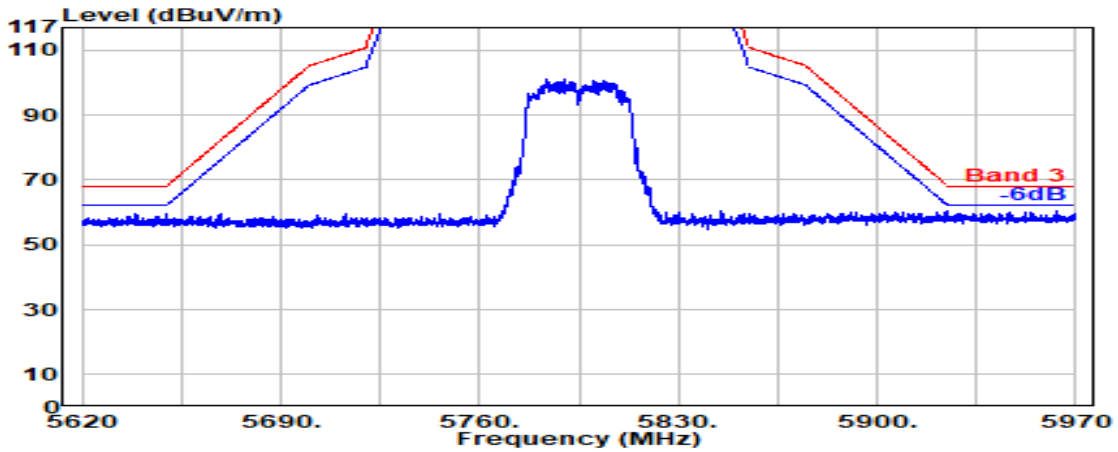

Antenna at Vertical Polarization

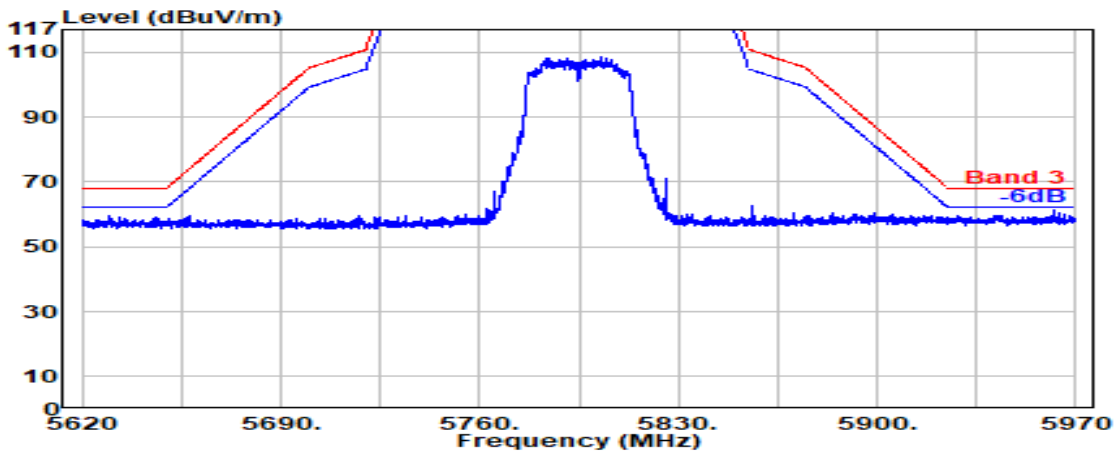


Mode	802.11n-HT40	U-NII Band	4
		Frequency	TX 5875MHz

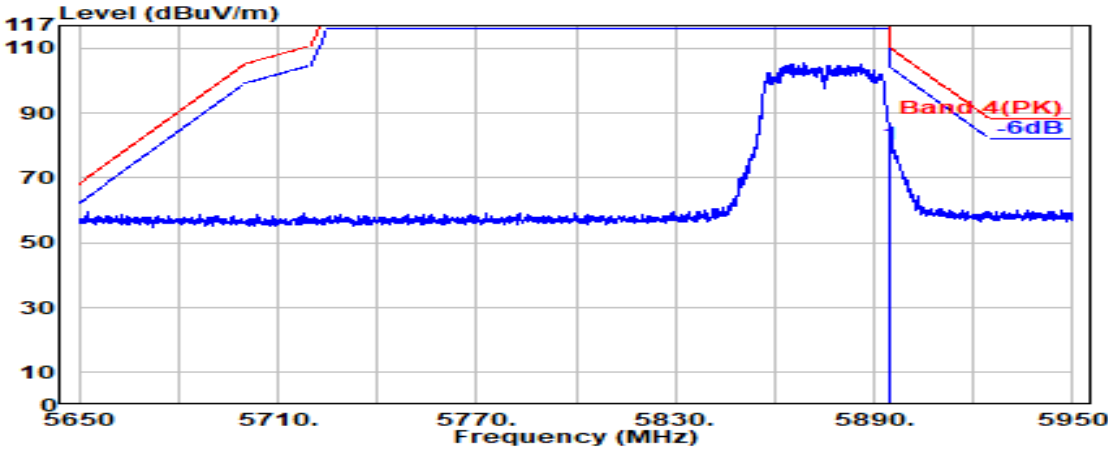

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	76.31	80.24	110.20	29.96	Peak

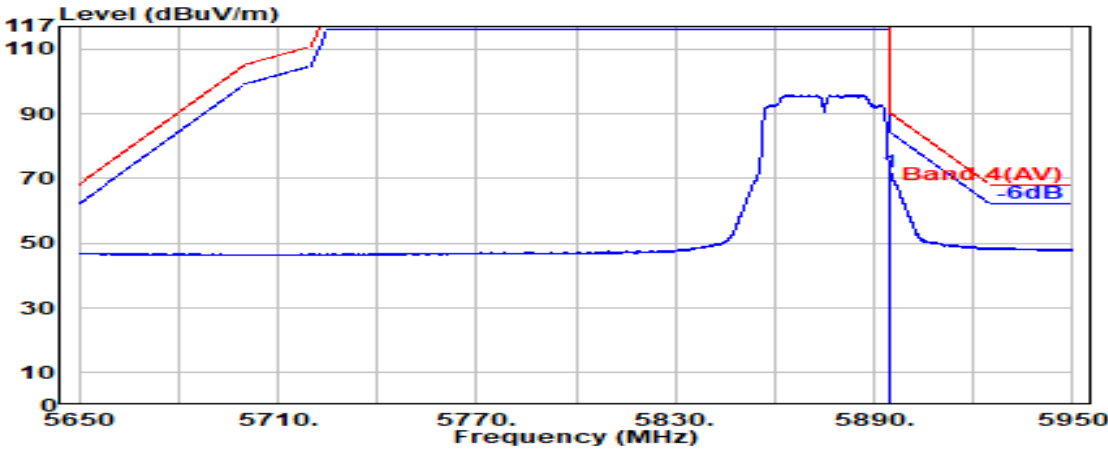


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	67.94	71.87	90.20	18.33	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11n-HT40	U-NII Band	4
		Frequency	TX 5875MHz

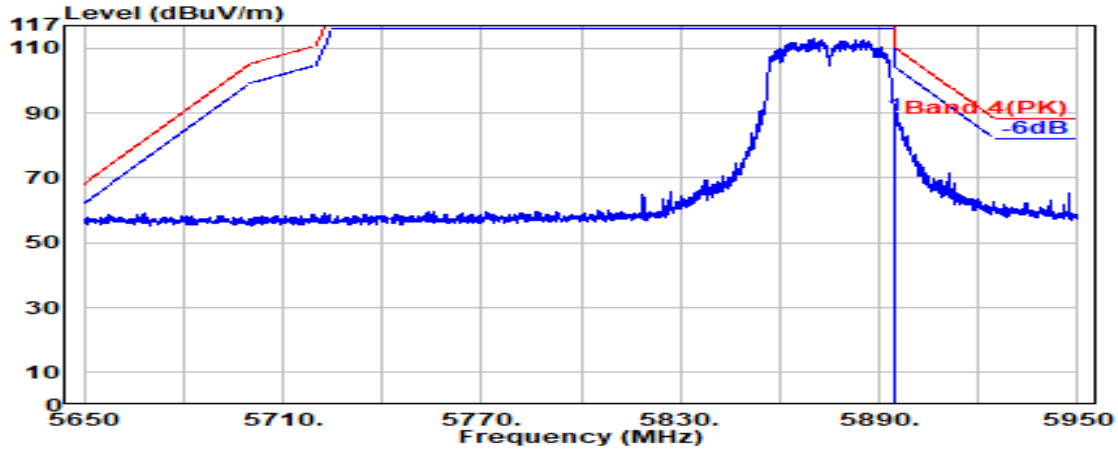

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	85.40	89.33	110.20	20.87	Peak

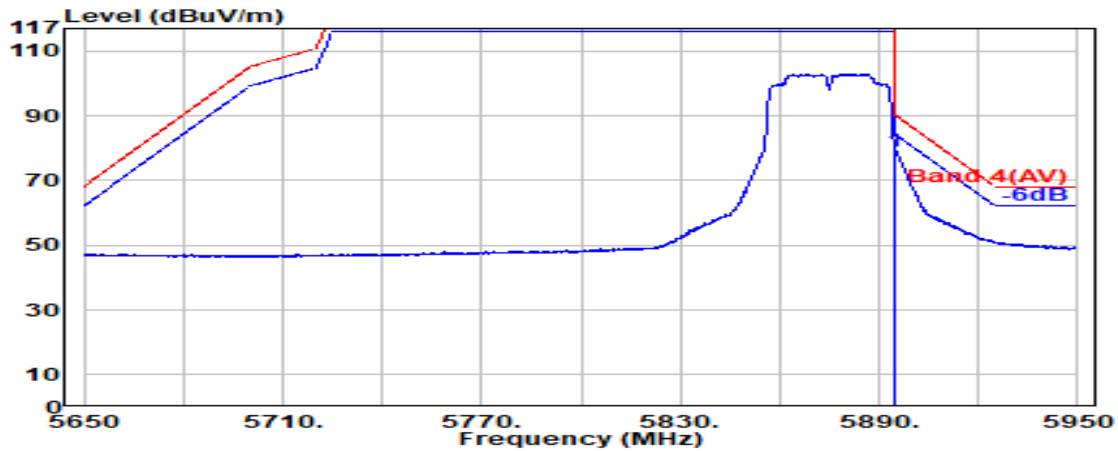


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	75.29	79.21	90.20	10.99	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

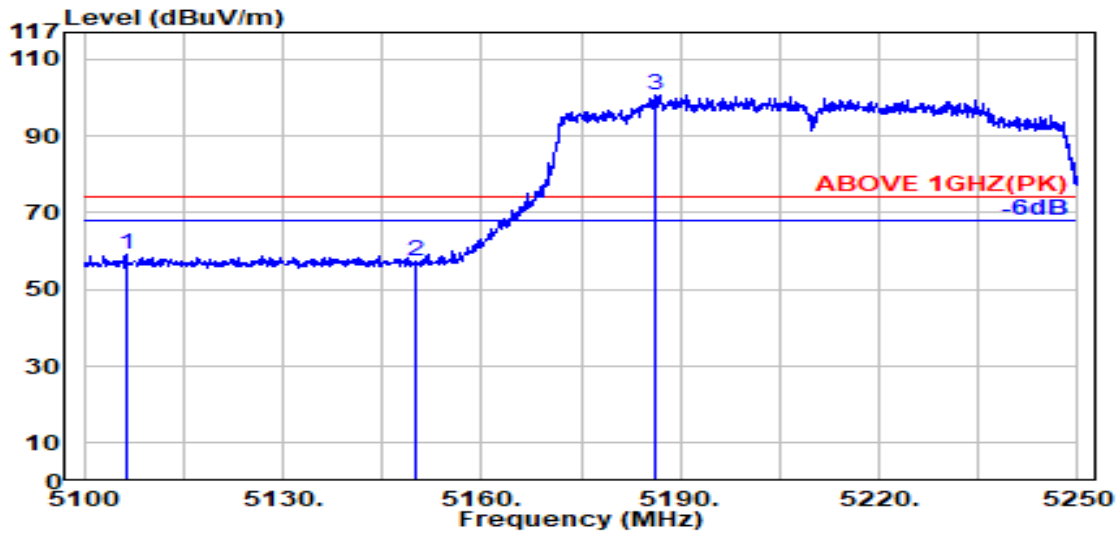

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.300	33.41	8.33	39.20	56.61	59.15	74.00	14.85	Peak
5150.000	33.50	8.37	39.19	54.89	57.57	74.00	16.43	Peak
@ 5186.300	33.72	8.41	39.19	97.69	100.63	---	---	Peak

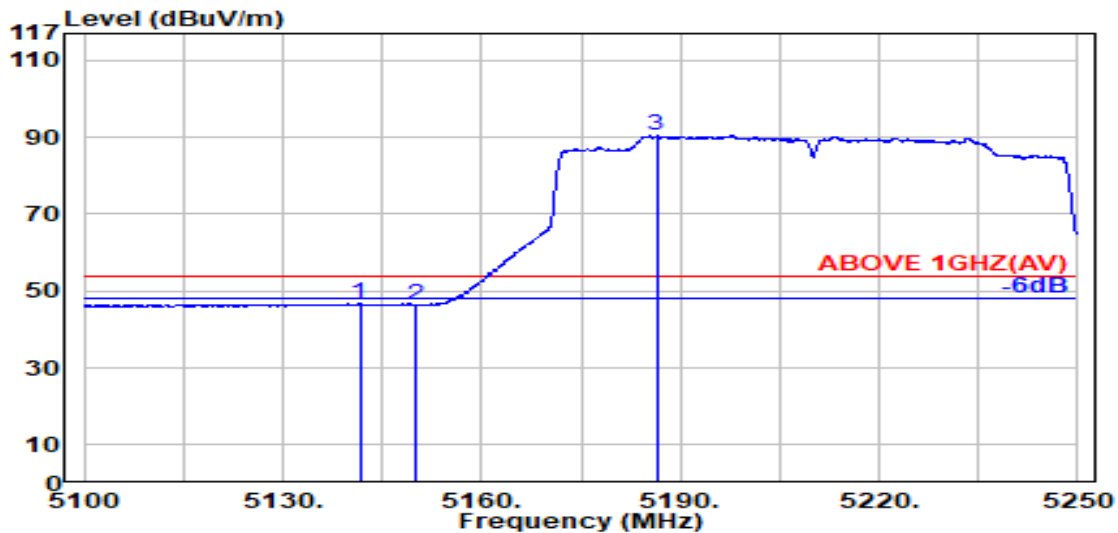


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.600	33.48	8.37	39.19	44.11	46.76	54.00	7.24	Average
5150.000	33.50	8.37	39.19	43.61	46.29	54.00	7.71	Average
@ 5186.400	33.72	8.41	39.19	87.51	90.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

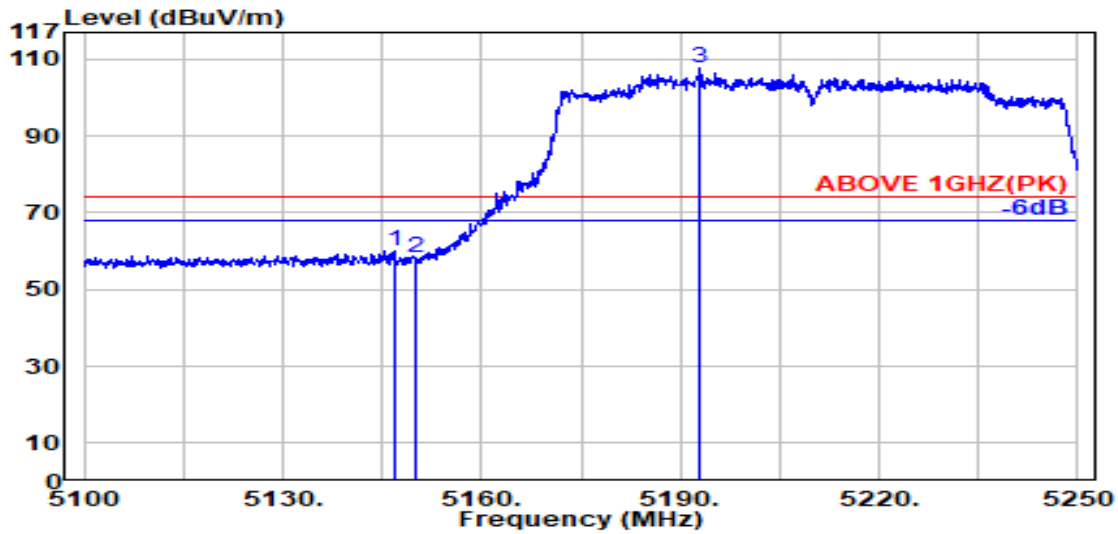

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	33.49	8.37	39.19	57.18	59.85	74.00	14.15	Peak
5150.000	33.50	8.37	39.19	55.42	58.10	74.00	15.90	Peak
@ 5192.800	33.76	8.42	39.19	104.64	107.63	---	---	Peak

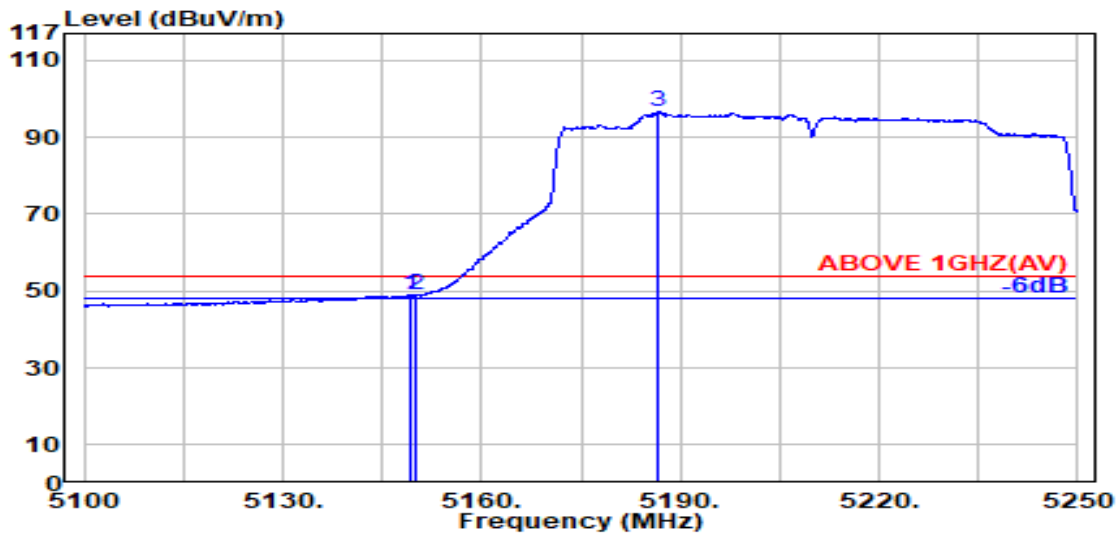


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	46.45	49.13	54.00	4.87	Average
5150.000	33.50	8.37	39.19	46.12	48.80	54.00	5.20	Average
@ 5186.600	33.72	8.41	39.19	93.84	96.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

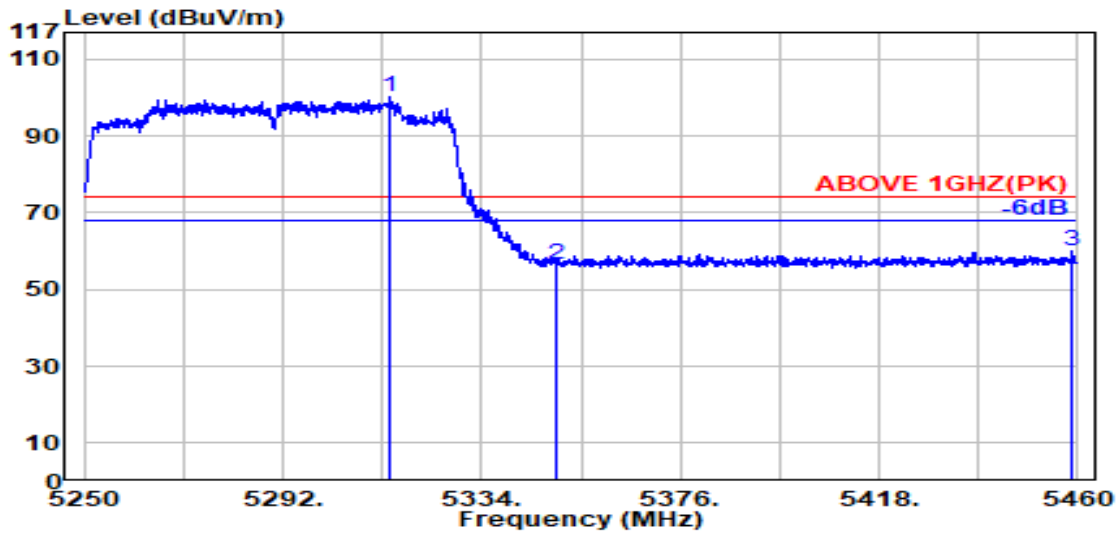

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.600	33.77	8.54	39.17	96.91	100.05	---	---	Peak
5350.000	33.70	8.57	39.17	53.50	56.61	74.00	17.39	Peak
5458.700	34.02	8.68	39.15	56.39	59.93	74.00	14.07	Peak

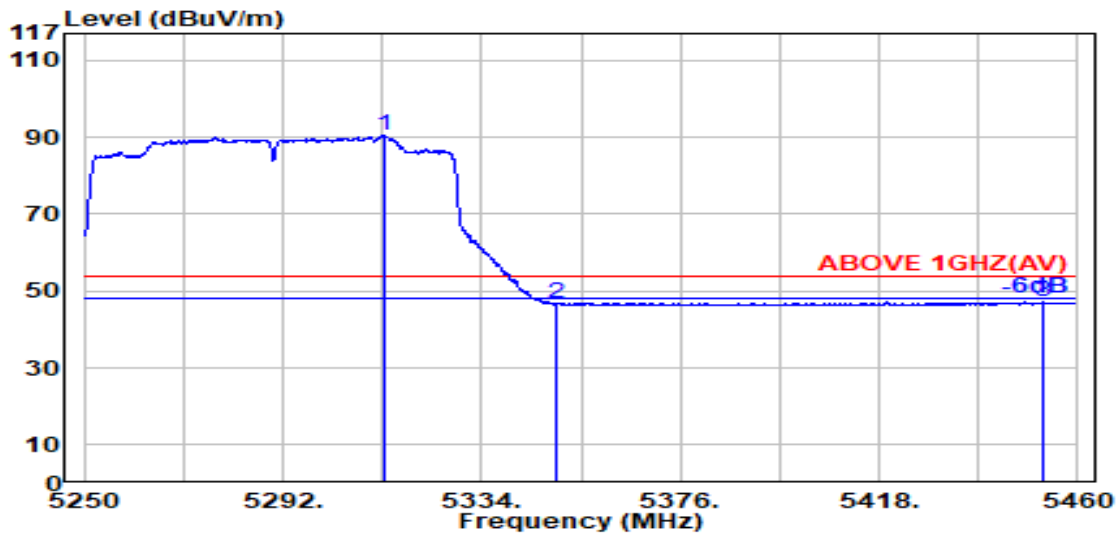


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.400	33.77	8.54	39.17	87.43	90.56	---	---	Average
5350.000	33.70	8.57	39.17	43.72	46.82	54.00	7.18	Average
5452.400	34.00	8.67	39.16	43.69	47.21	54.00	6.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

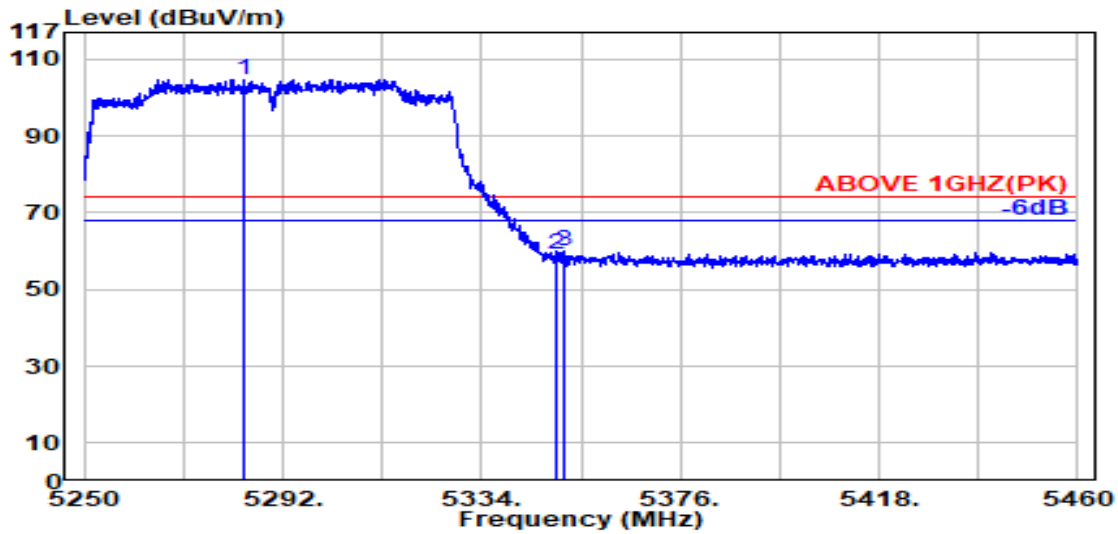

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5283.800	33.77	8.51	39.18	101.62	104.72	---	---	Peak
5350.000	33.70	8.57	39.17	55.93	59.03	74.00	14.97	Peak
5351.200	33.70	8.57	39.17	56.82	59.93	74.00	14.07	Peak

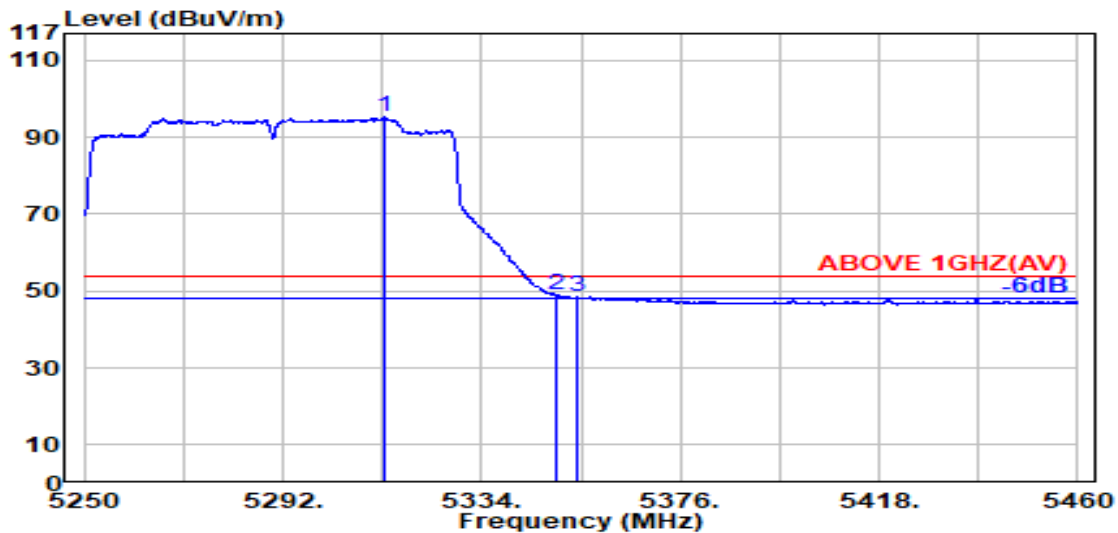


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.500	33.77	8.54	39.17	92.07	95.20	---	---	Average
5350.000	33.70	8.57	39.17	45.99	49.10	54.00	4.90	Average
5354.200	33.72	8.58	39.17	45.56	48.68	54.00	5.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

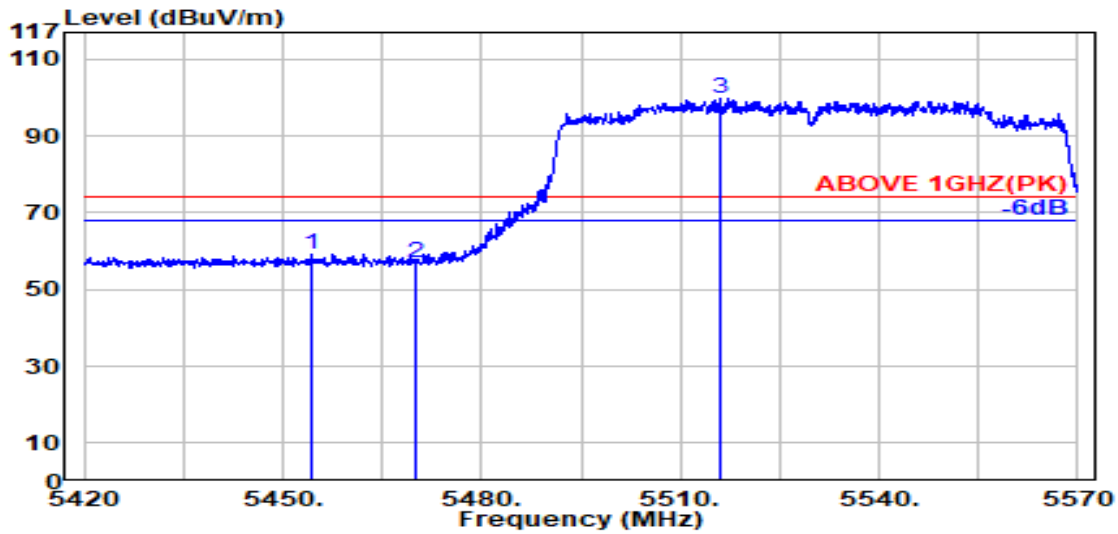

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.400	34.01	8.67	39.16	55.60	59.13	74.00	14.87	Peak
5470.000	34.04	8.69	39.15	53.54	57.11	74.00	16.89	Peak
@ 5515.900	34.07	8.73	39.15	96.15	99.79	---	---	Peak

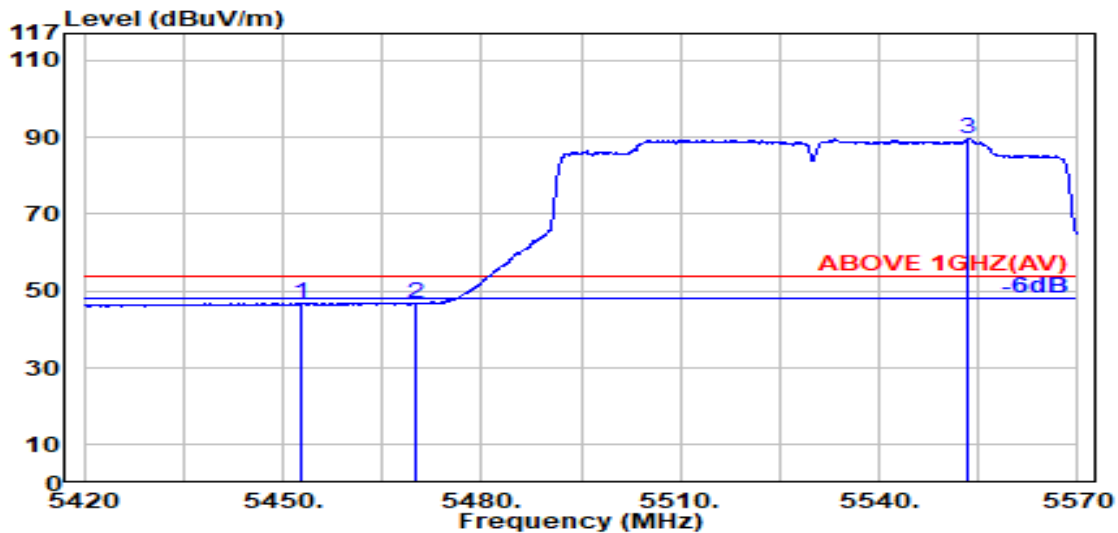


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.600	34.01	8.67	39.16	43.46	46.99	54.00	7.01	Average
5470.000	34.04	8.69	39.15	43.15	46.72	54.00	7.28	Average
@ 5553.400	33.99	8.77	39.16	86.04	89.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

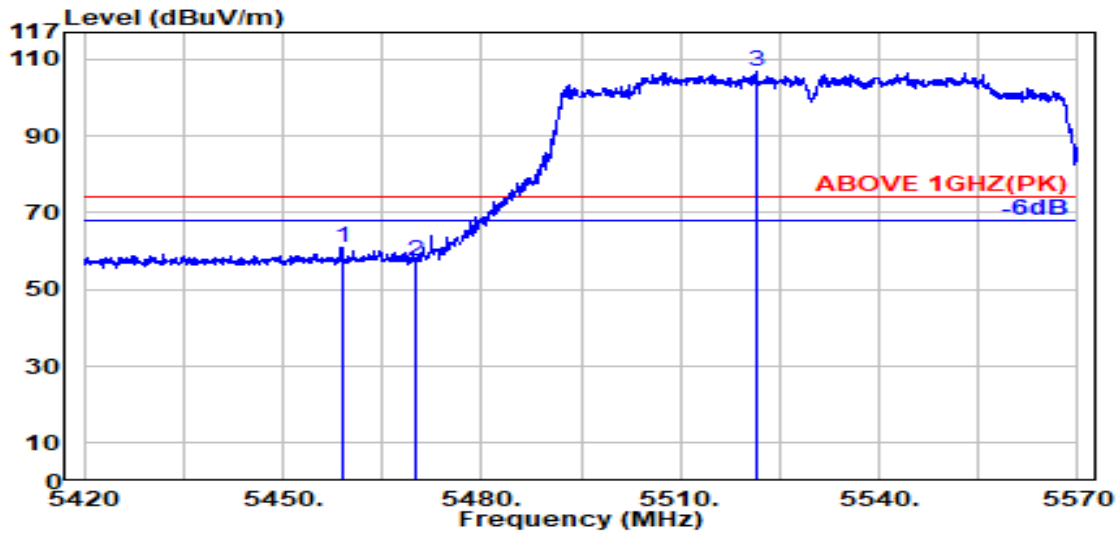

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.900	34.02	8.68	39.15	57.36	60.90	74.00	13.10	Peak
5470.000	34.04	8.69	39.15	53.98	57.56	74.00	16.44	Peak
@ 5521.600	34.06	8.74	39.15	103.06	106.70	---	---	Peak

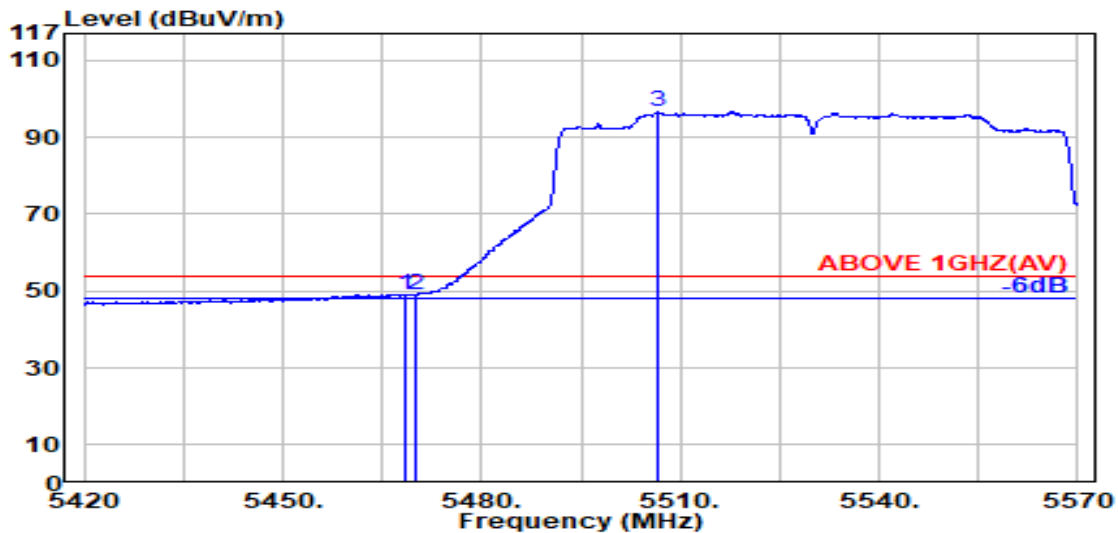


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	45.55	49.12	54.00	4.88	Average
5470.000	34.04	8.69	39.15	45.56	49.14	54.00	4.86	Average
@ 5506.600	34.09	8.72	39.15	93.03	96.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

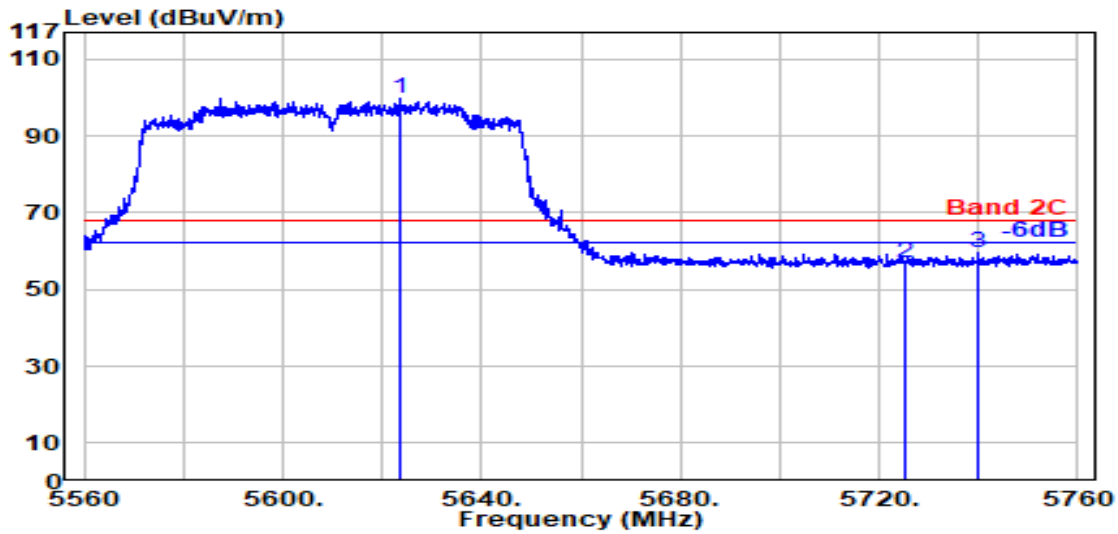

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5623.600	33.80	8.83	39.18	96.53	99.99	---	---	Peak
5725.000	33.60	8.93	39.20	53.58	56.91	68.20	11.29	Peak
5740.000	33.60	8.94	39.20	56.10	59.44	68.20	8.76	Peak

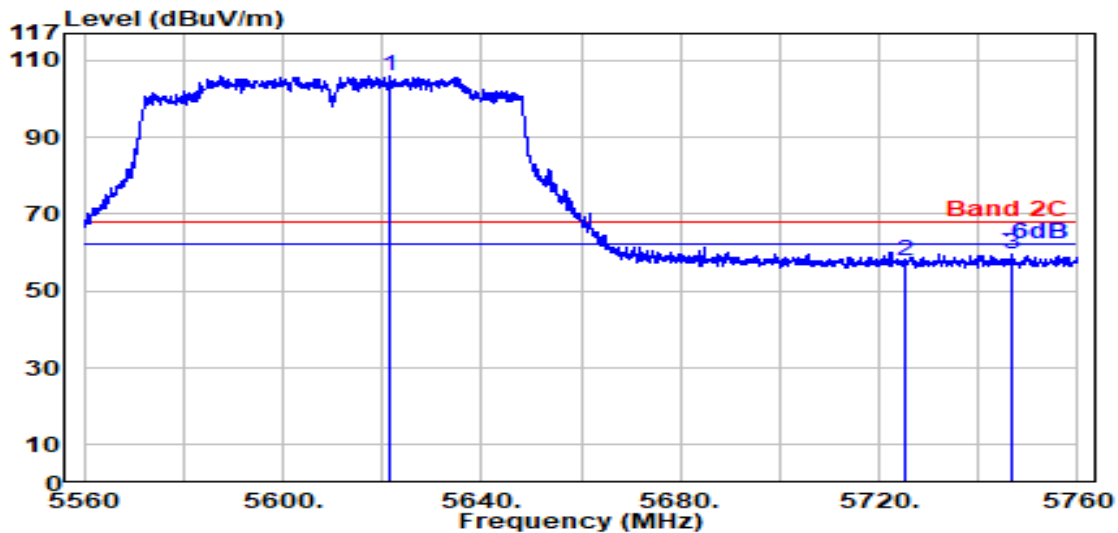


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5621.600	33.80	8.83	39.18	102.37	105.83	---	---	Peak
5725.000	33.60	8.93	39.20	54.48	57.81	68.20	10.39	Peak
5746.700	33.60	8.95	39.20	56.15	59.50	68.20	8.70	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

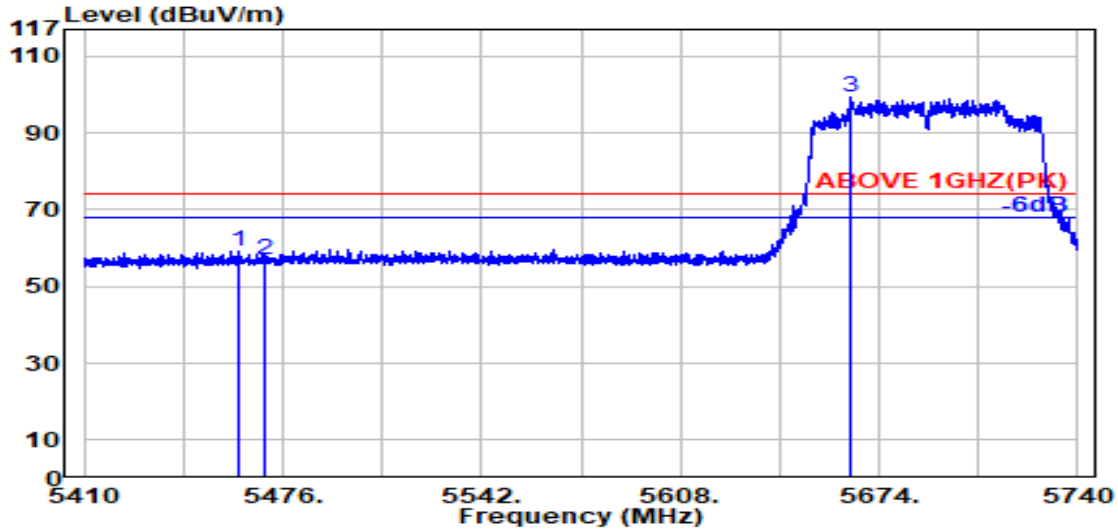

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.500	34.02	8.68	39.15	55.53	59.08	74.00	14.92	Peak
5470.000	34.04	8.69	39.15	53.38	56.96	74.00	17.04	Peak
@ 5664.300	33.74	8.87	39.18	95.90	99.33	---	---	Peak

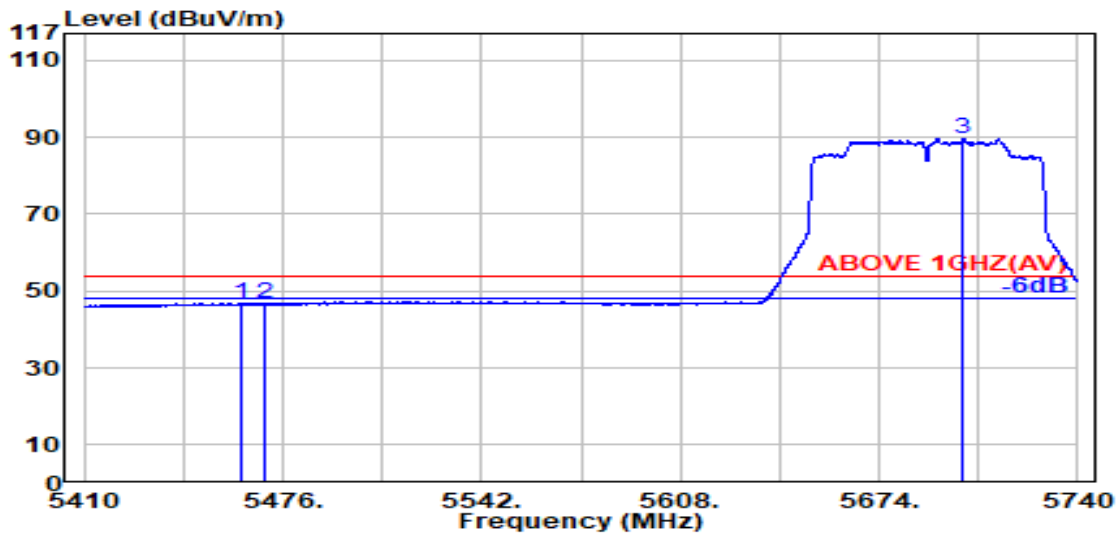


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.600	34.03	8.68	39.15	43.18	46.73	54.00	7.27	Average
5470.000	34.04	8.69	39.15	43.07	46.64	54.00	7.36	Average
@ 5701.900	33.60	8.90	39.19	86.31	89.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

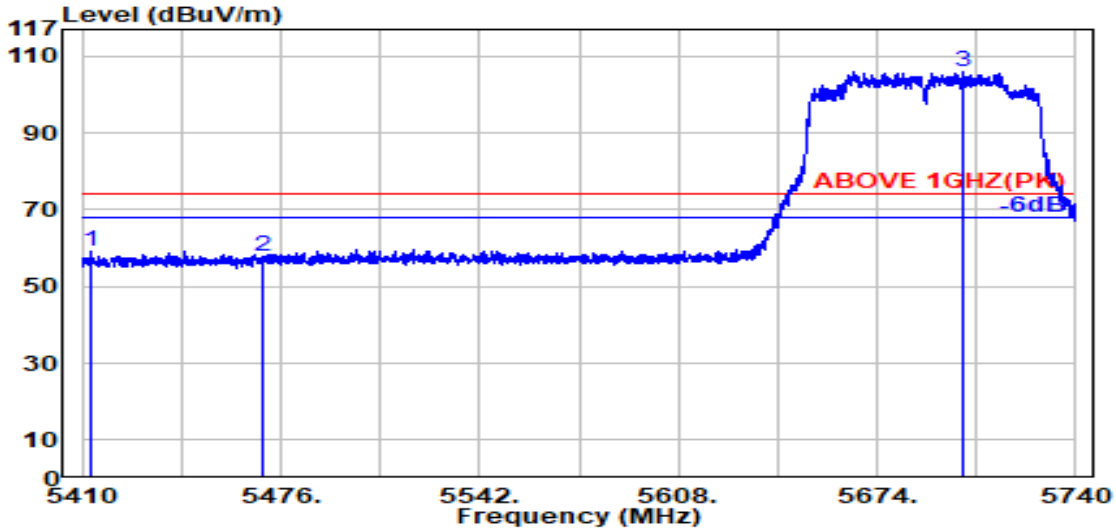

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5413.300	33.93	8.63	39.16	55.76	59.16	74.00	14.84	Peak
5470.000	34.04	8.69	39.15	54.11	57.68	74.00	16.32	Peak
@ 5702.800	33.60	8.91	39.19	102.64	105.95	---	---	Peak

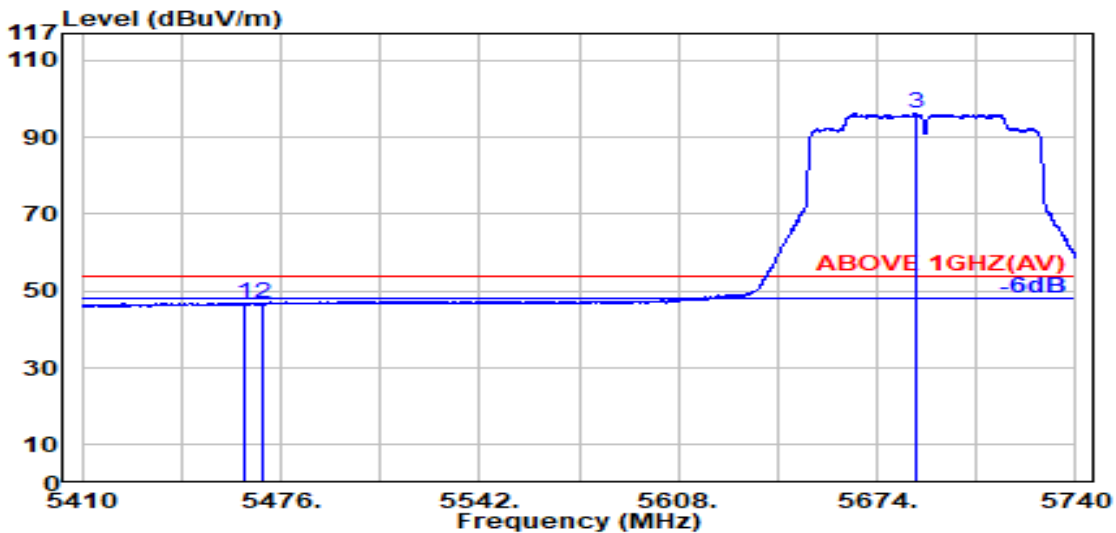


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.300	34.03	8.68	39.15	43.42	46.98	54.00	7.02	Average
5470.000	34.04	8.69	39.15	43.01	46.59	54.00	7.41	Average
@ 5686.700	33.65	8.89	39.19	93.03	96.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

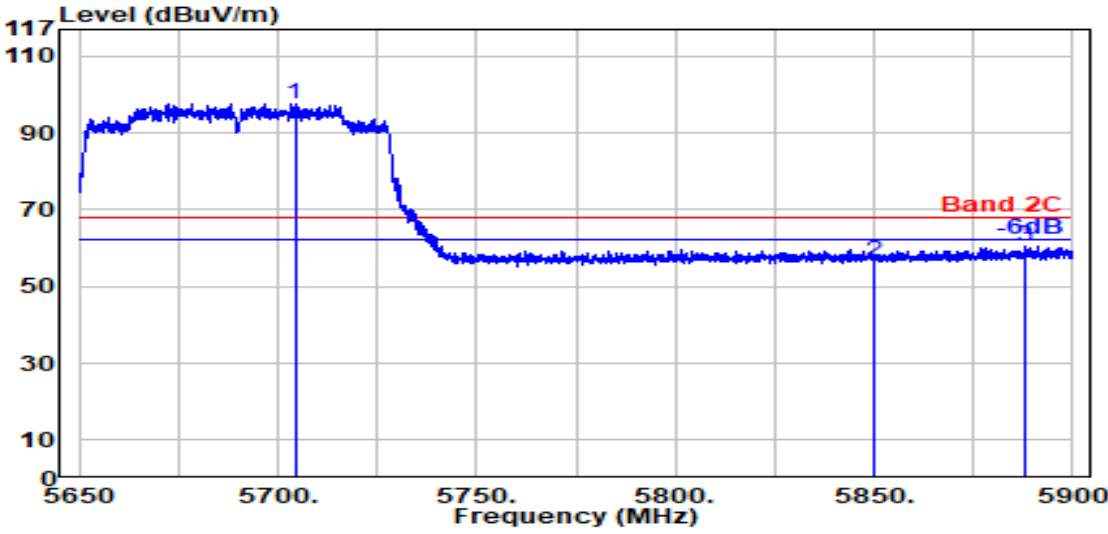

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.286	33.60	8.91	39.19	94.37	97.69	---	---	Peak
5850.000	33.90	9.04	39.22	53.00	56.71	68.20	11.49	Peak
5888.071	34.05	9.07	39.23	56.52	60.42	68.20	7.78	Peak

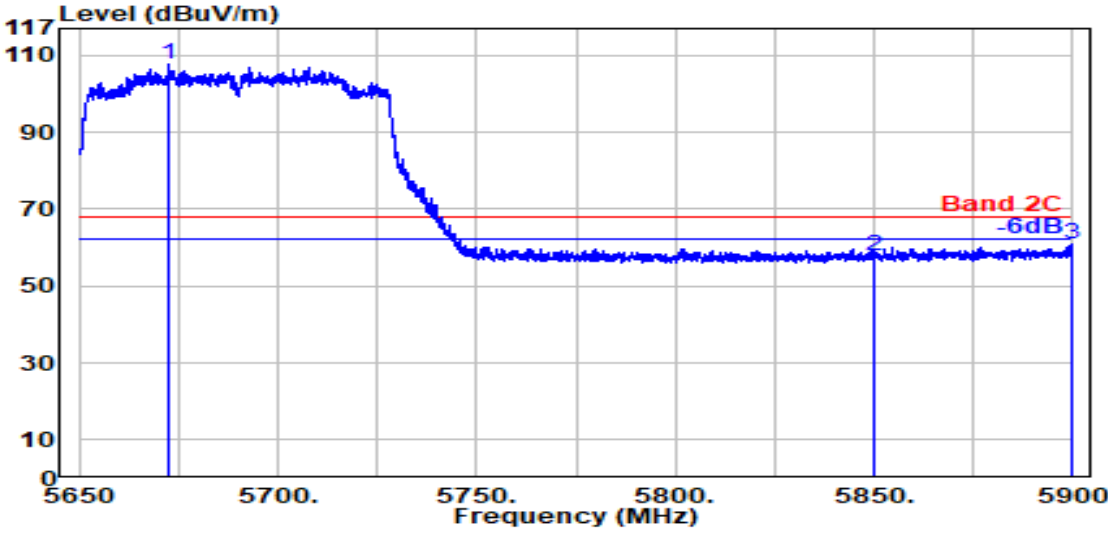


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.643	33.71	8.88	39.19	104.21	107.61	---	---	Peak
5850.000	33.90	9.04	39.22	54.11	57.83	68.20	10.37	Peak
5899.500	34.10	9.08	39.23	56.91	60.86	68.20	7.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

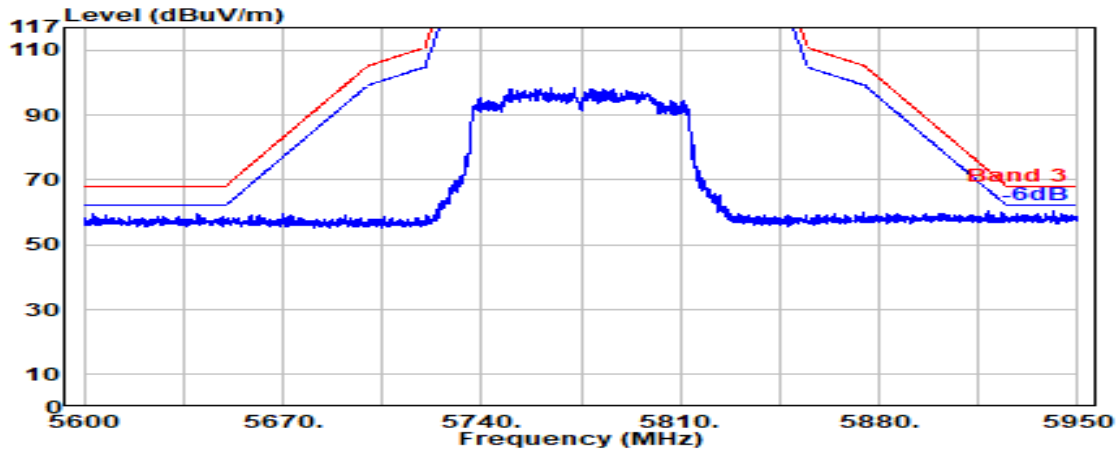

Antenna at Vertical Polarization

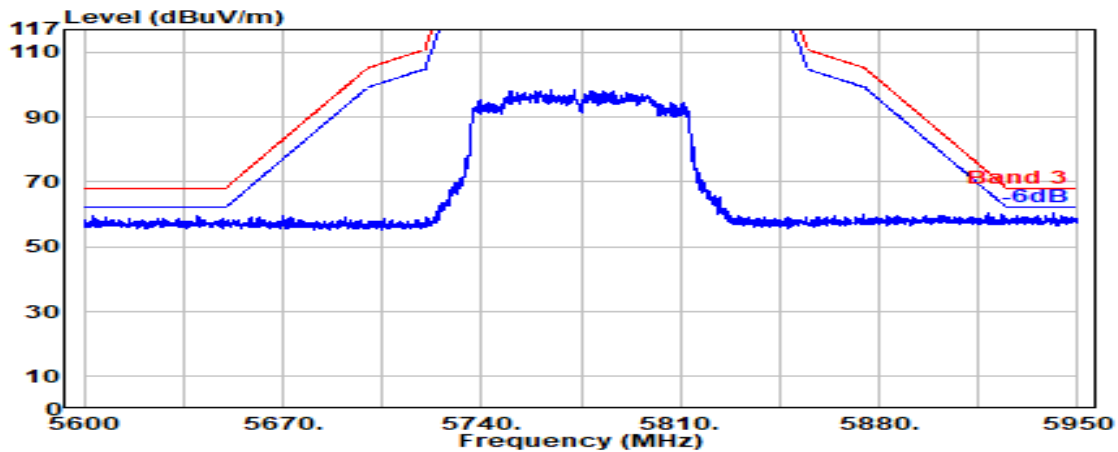


Mode	802.11ac-VHT80	U-NII Band	4
		Frequency	TX 5855MHz

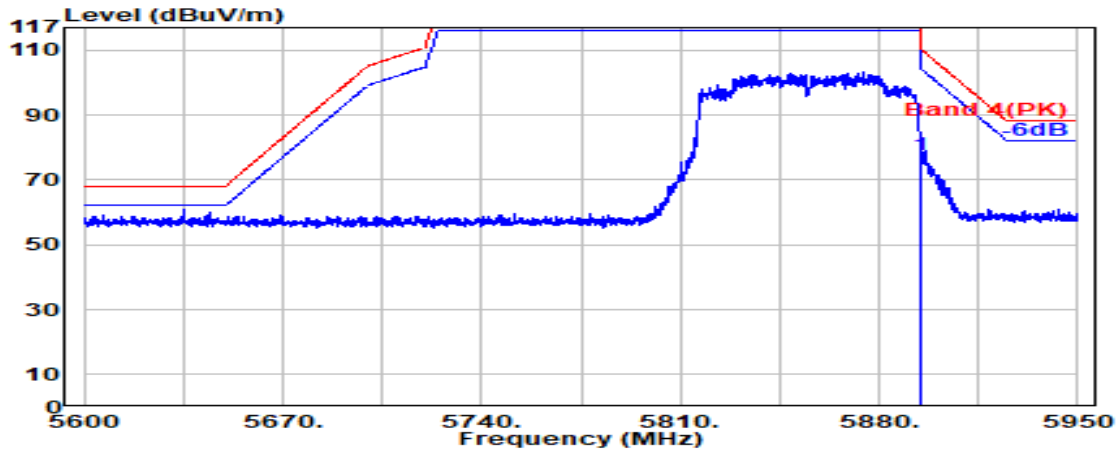

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	73.82	77.75	110.16	32.41	Peak

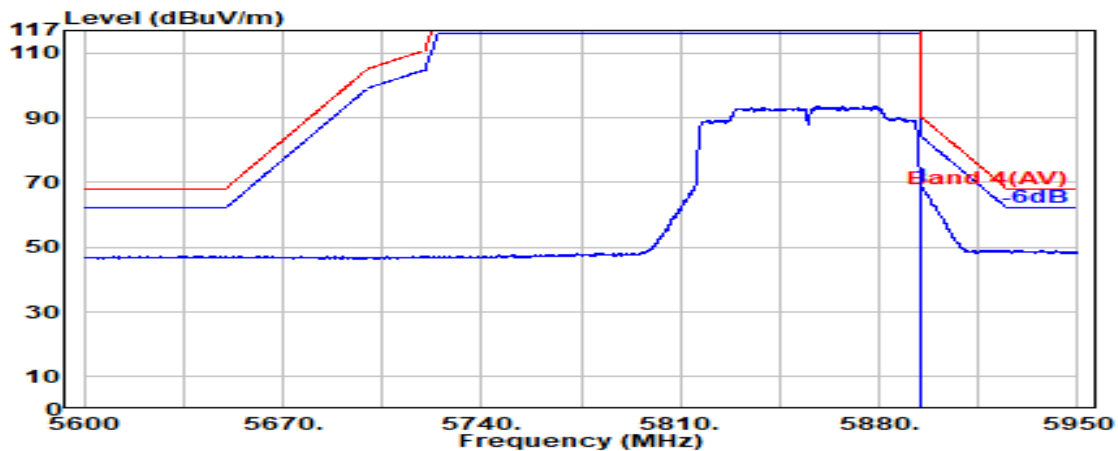


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	64.94	68.87	90.16	21.29	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ac-VHT80	U-NII Band	4
		Frequency	TX 5855MHz

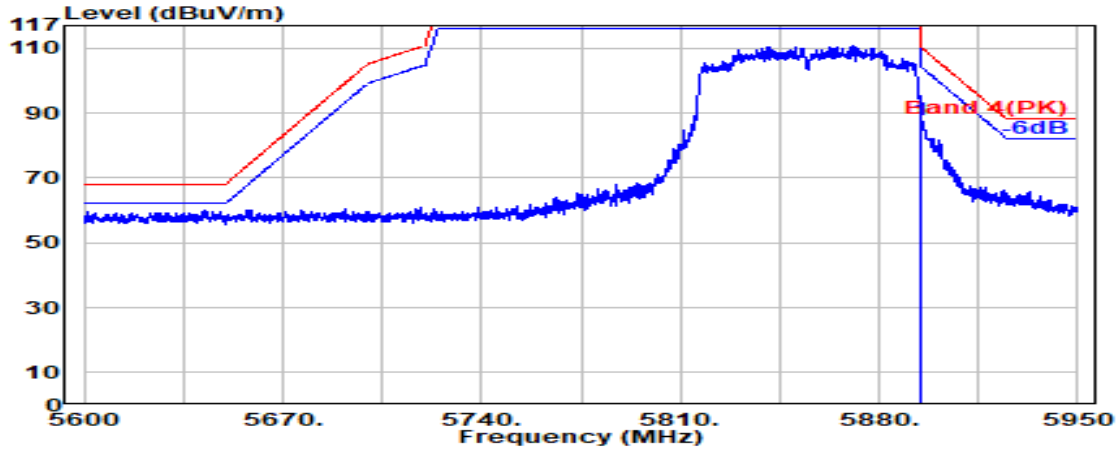

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	84.00	87.93	110.16	22.23	Peak

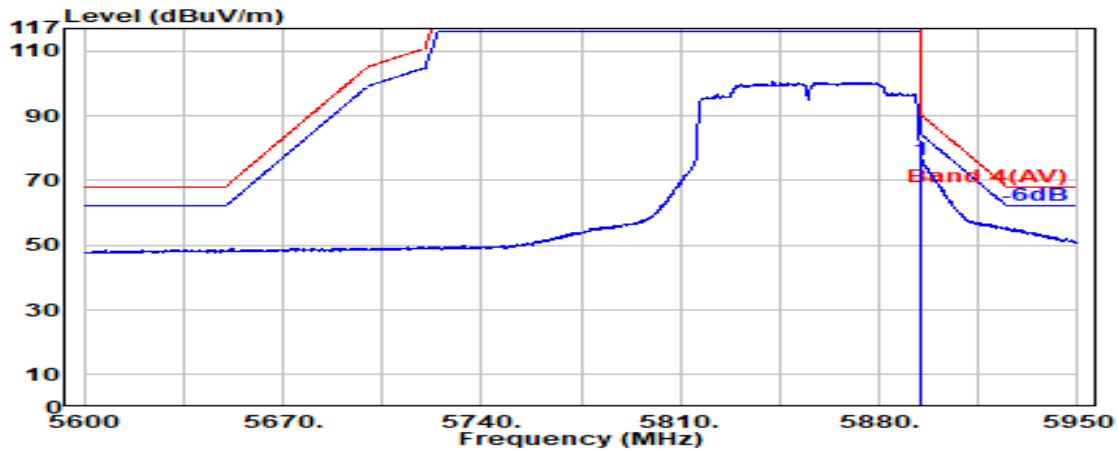


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	72.49	76.42	90.16	13.74	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

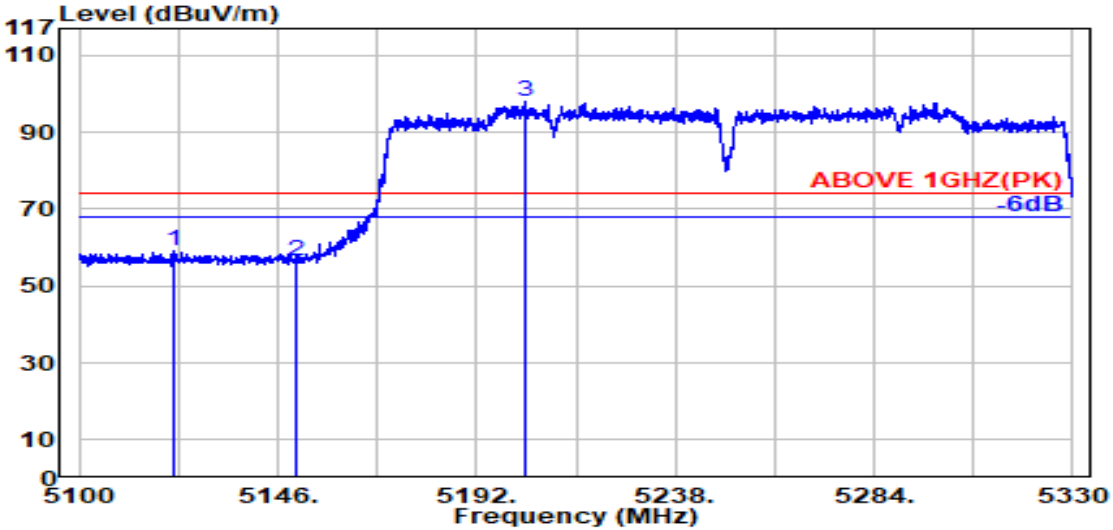

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.700	33.44	8.35	39.19	56.59	59.19	74.00	14.81	Peak
5150.000	33.50	8.37	39.19	53.67	56.35	74.00	17.65	Peak
@ 5203.000	33.79	8.43	39.18	95.05	98.09	---	---	Peak

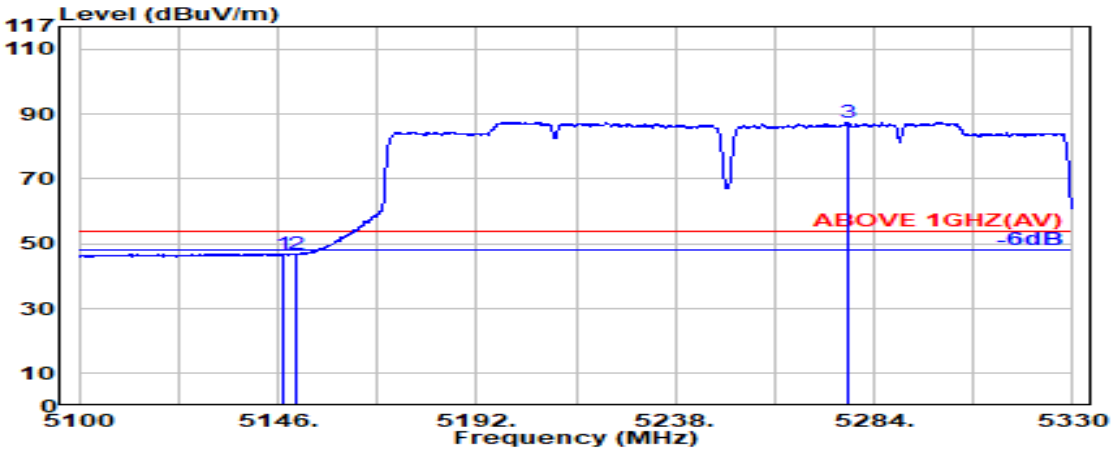


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.49	8.37	39.19	44.29	46.97	54.00	7.03	Peak
5150.000	33.50	8.37	39.19	43.96	46.65	54.00	7.35	Peak
@ 5278.000	33.76	8.50	39.18	84.46	87.54	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

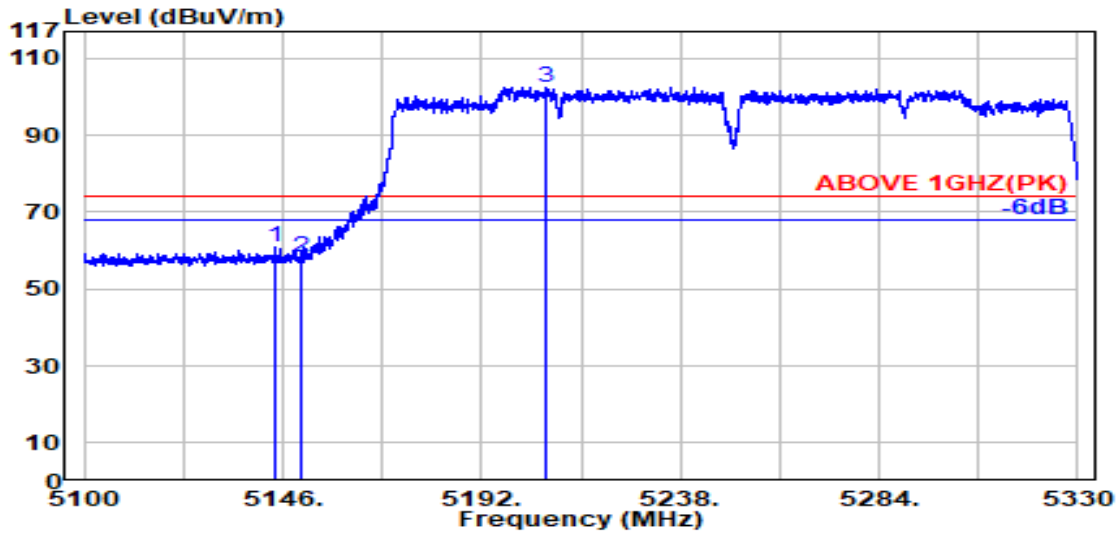

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.300	33.49	8.37	39.19	58.23	60.90	74.00	13.10	Peak
5150.000	33.50	8.37	39.19	55.46	58.15	74.00	15.85	Peak
@ 5207.100	33.79	8.43	39.18	99.53	102.56	---	---	Peak

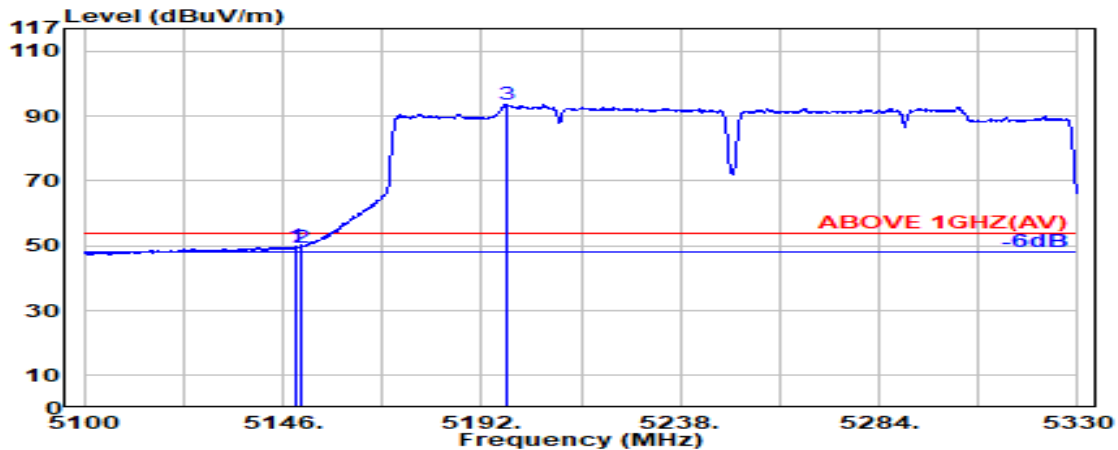


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.19	47.14	49.82	54.00	4.18	Average
5150.000	33.50	8.37	39.19	46.84	49.52	54.00	4.48	Average
@ 5197.600	33.79	8.42	39.19	90.79	93.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

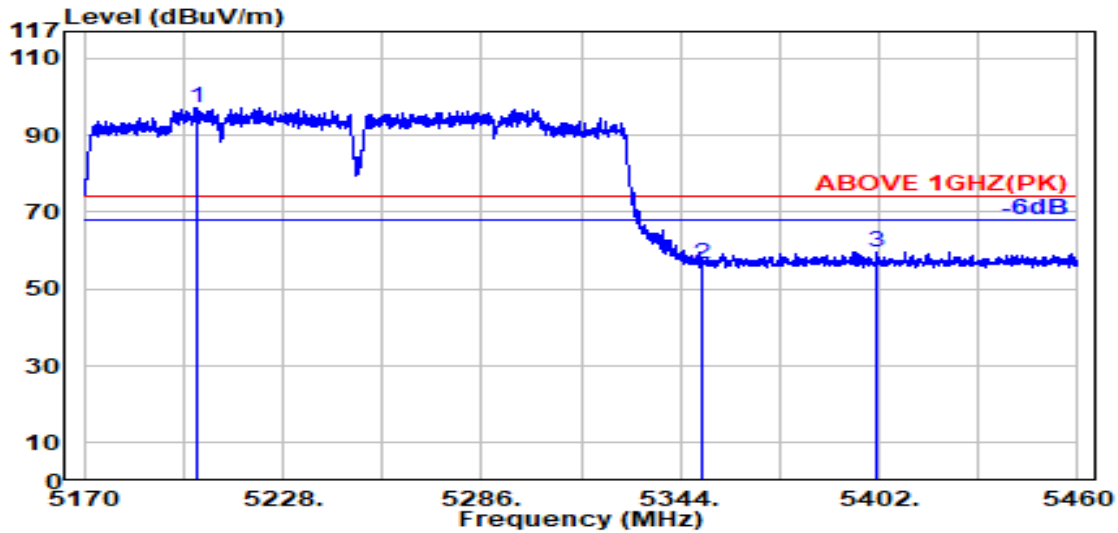

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5202.600	33.79	8.43	39.18	94.28	97.32	---	---	Peak
5350.000	33.70	8.57	39.17	53.59	56.69	74.00	17.31	Peak
5401.000	33.90	8.62	39.16	56.35	59.71	74.00	14.29	Peak

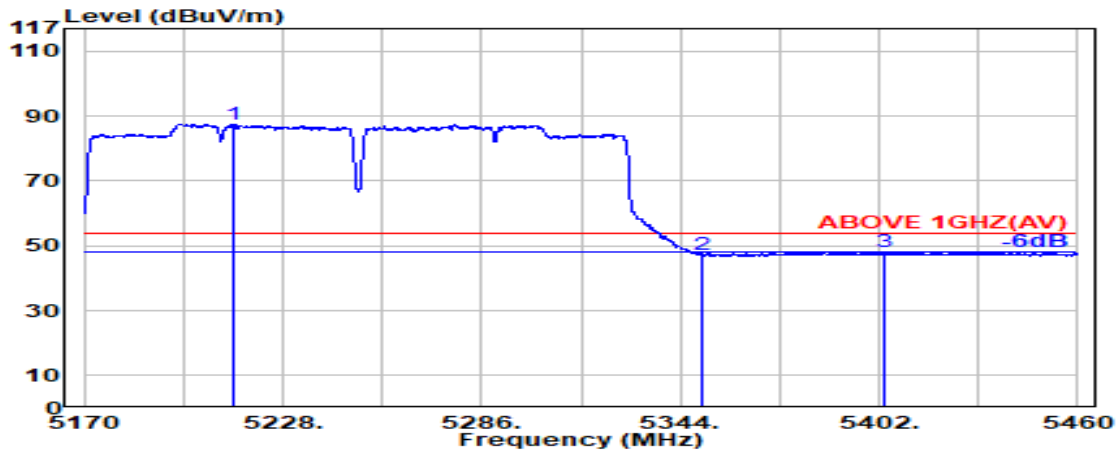


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5213.500	33.77	8.44	39.18	84.56	87.58	---	---	Average
5350.000	33.70	8.57	39.17	44.33	47.44	54.00	6.56	Average
5403.700	33.91	8.62	39.16	44.65	48.02	54.00	5.98	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

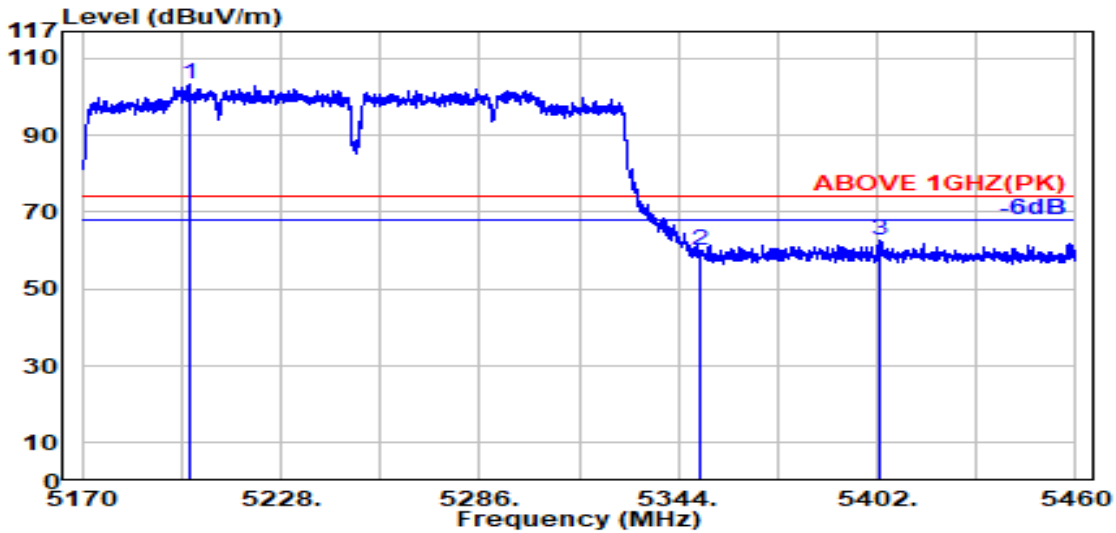

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5201.100	33.80	8.43	39.19	100.13	103.17	---	---	Peak
5350.000	33.70	8.57	39.17	56.90	60.00	74.00	14.00	Peak
5403.100	33.91	8.62	39.16	59.19	62.56	74.00	11.44	Peak

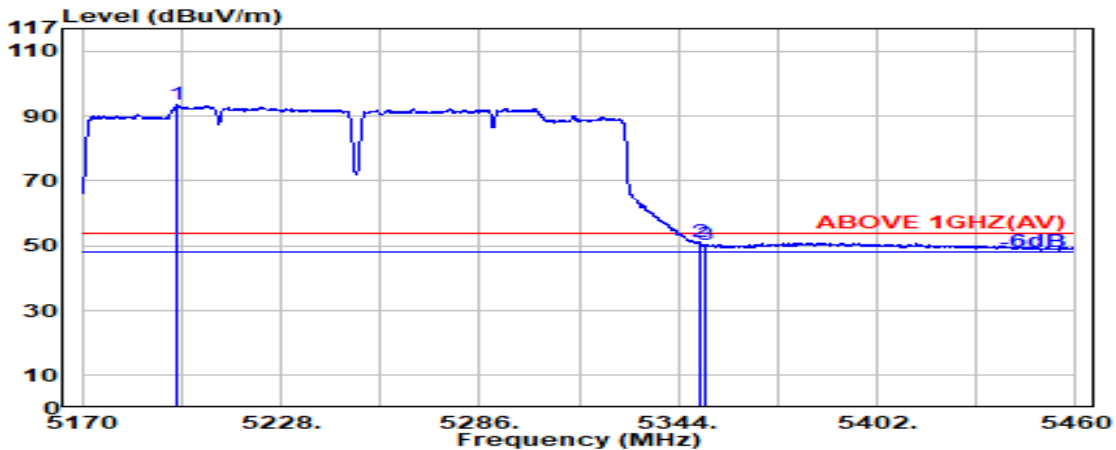


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.900	33.79	8.42	39.19	90.47	93.50	---	---	Average
5350.000	33.70	8.57	39.17	47.90	51.00	54.00	3.00	Average
5351.900	33.71	8.57	39.17	47.37	50.48	54.00	3.52	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

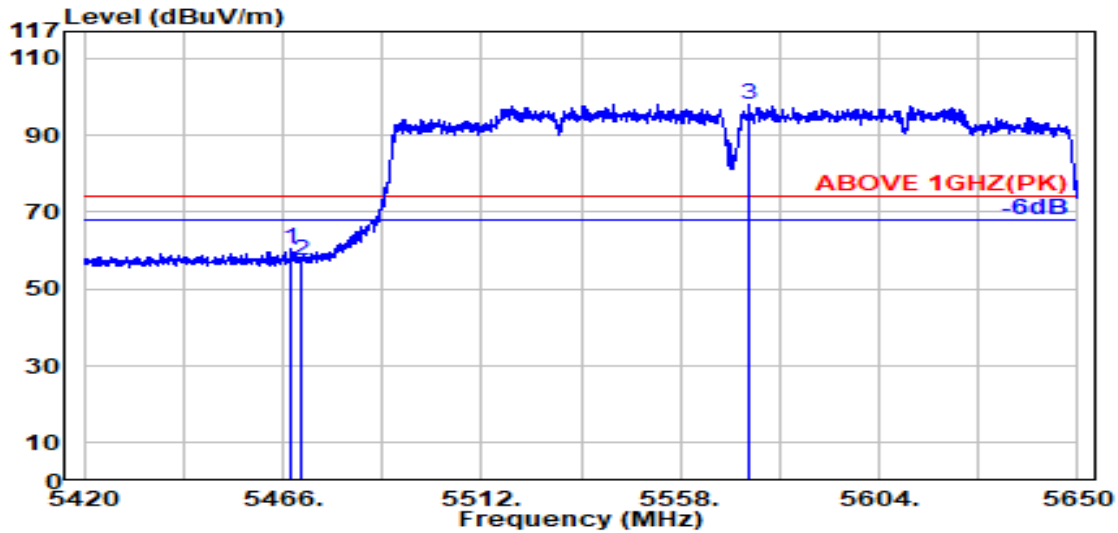

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	57.00	60.57	74.00	13.43	Peak
5470.000	34.04	8.69	39.15	53.84	57.41	74.00	16.59	Peak
@ 5573.900	33.90	8.79	39.17	94.38	97.90	---	---	Peak

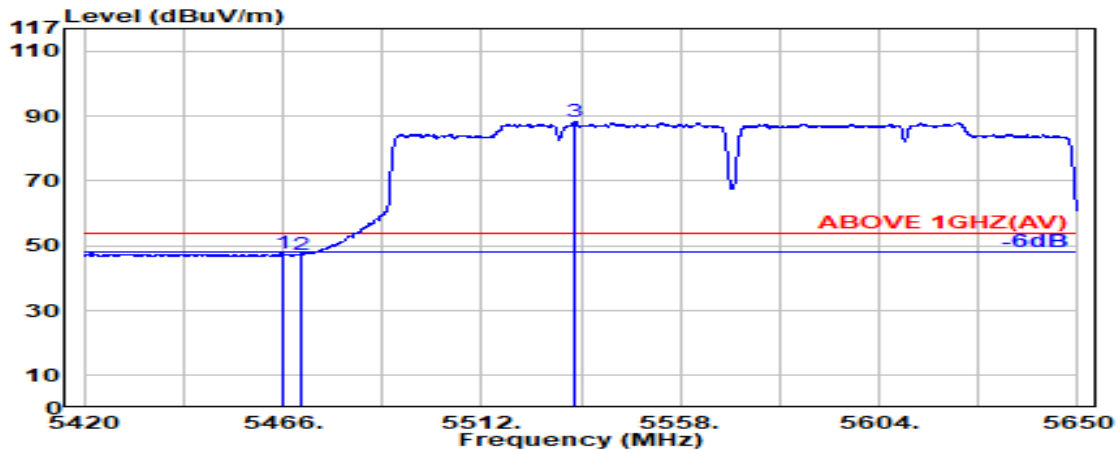


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.03	8.68	39.15	43.95	47.51	54.00	6.49	Average
5470.000	34.04	8.69	39.15	43.75	47.32	54.00	6.68	Average
@ 5533.500	34.03	8.75	39.16	84.77	88.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

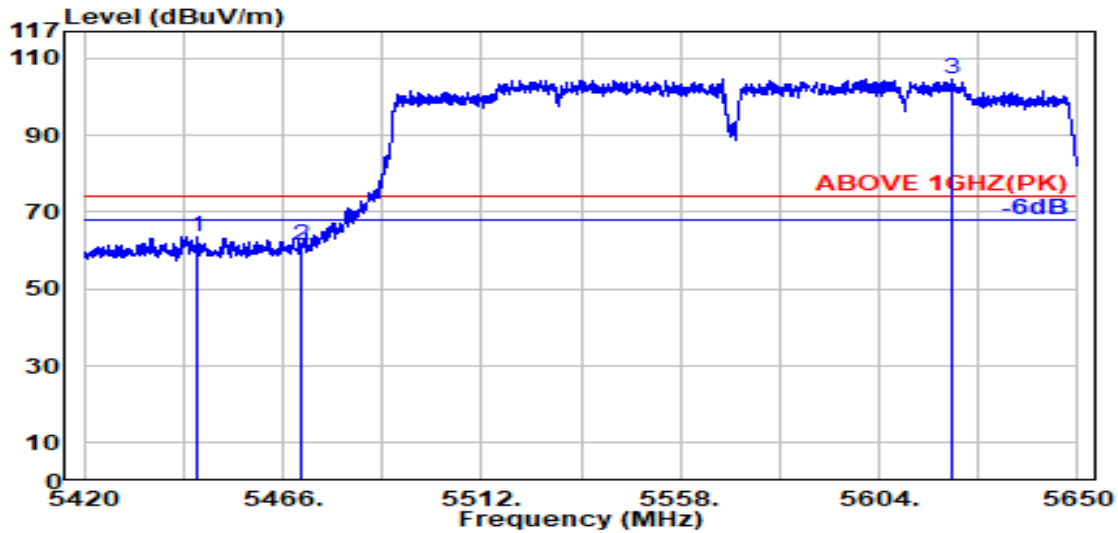

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.200	33.99	8.67	39.16	60.28	63.78	74.00	10.22	Peak
5470.000	34.04	8.69	39.15	57.90	61.48	74.00	12.52	Peak
@ 5620.700	33.80	8.83	39.17	101.36	104.82	---	---	Peak

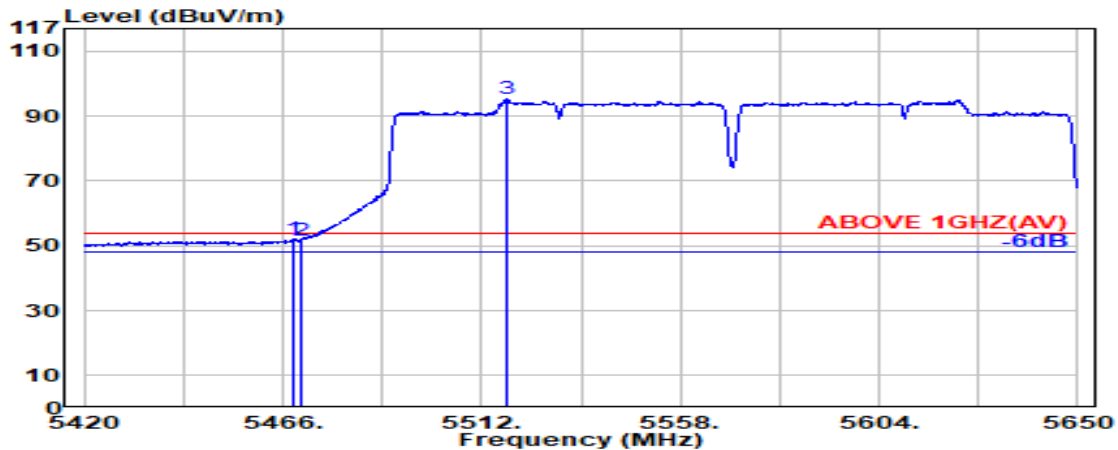


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	48.41	51.98	54.00	2.02	Average
5470.000	34.04	8.69	39.15	48.10	51.68	54.00	2.32	Average
@ 5517.900	34.06	8.73	39.15	91.55	95.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

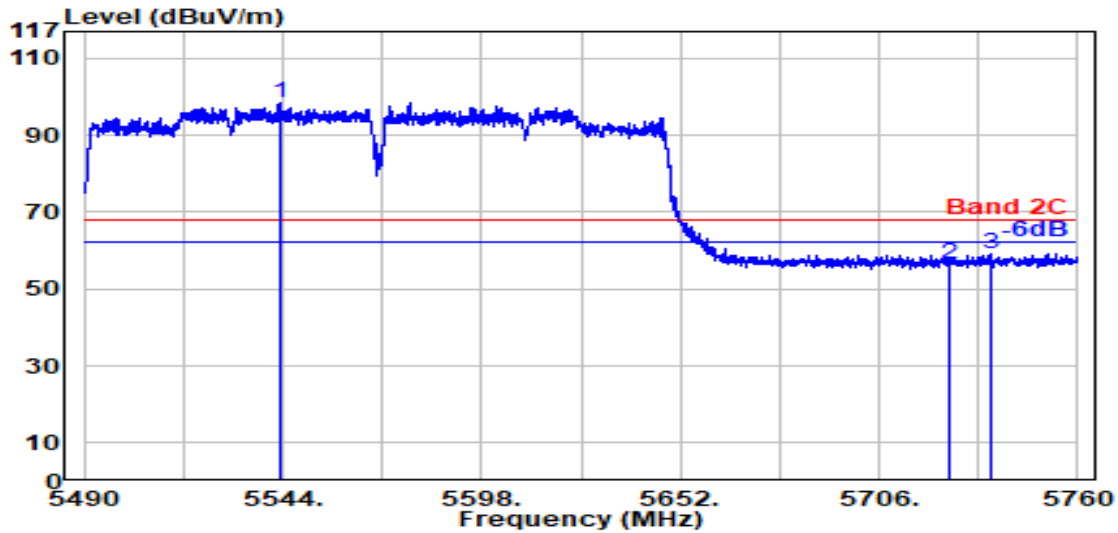

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5543.000	34.01	8.76	39.16	94.68	98.30	---	---	Peak
5725.000	33.60	8.93	39.20	52.97	56.30	68.20	11.90	Peak
5736.300	33.60	8.94	39.20	55.92	59.26	68.20	8.94	Peak

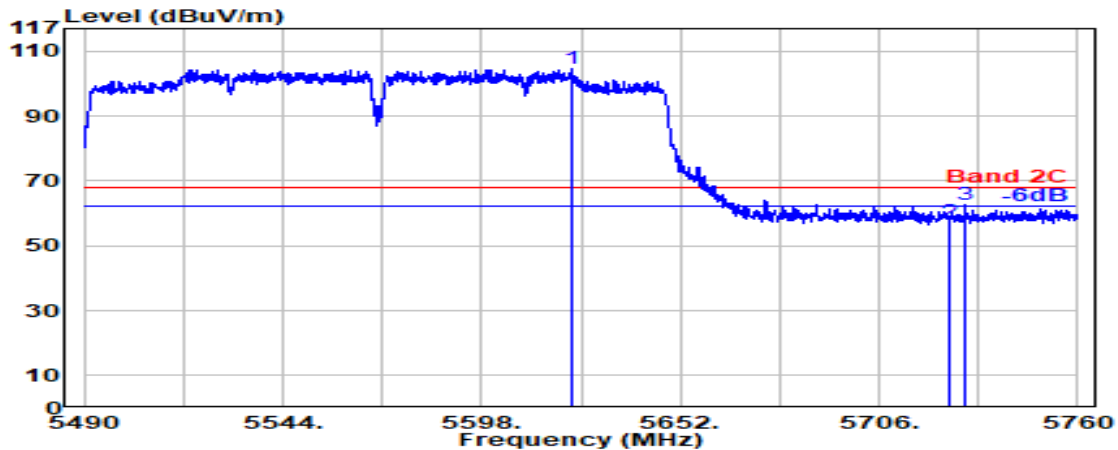


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.500	33.80	8.83	39.18	101.16	104.62	---	---	Peak
5725.000	33.60	8.93	39.20	54.11	57.44	68.20	10.76	Peak
5729.500	33.60	8.93	39.20	59.50	62.83	68.20	5.37	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT60	U-NII Band	4
		Frequency	TX 5815MHz

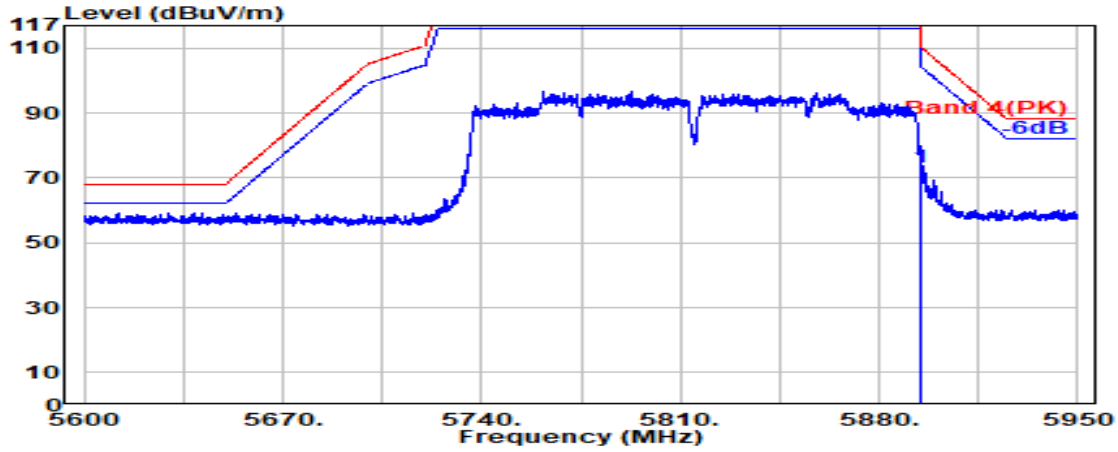

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	69.45	73.37	110.16	36.79	Peak

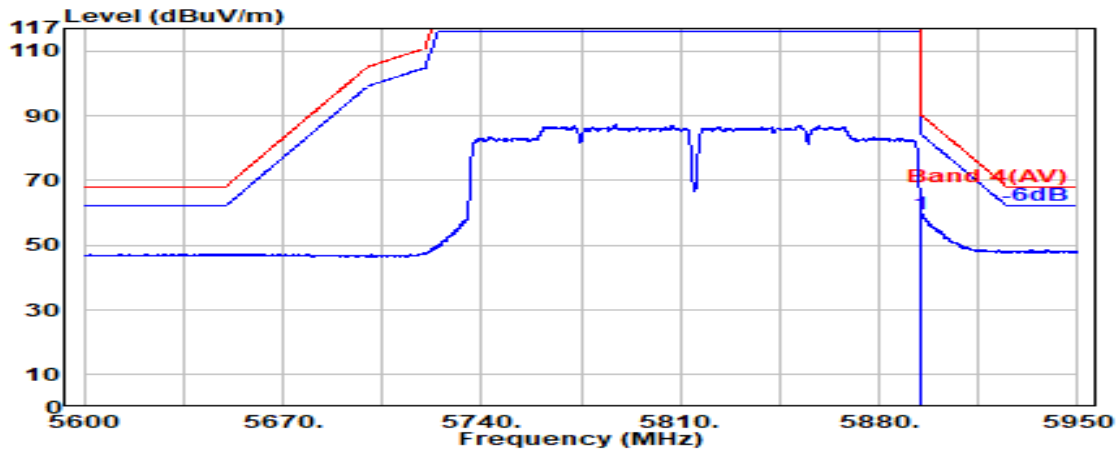


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	55.50	59.43	90.16	30.73	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ac-VHT60	U-NII Band	4
		Frequency	TX 5815MHz

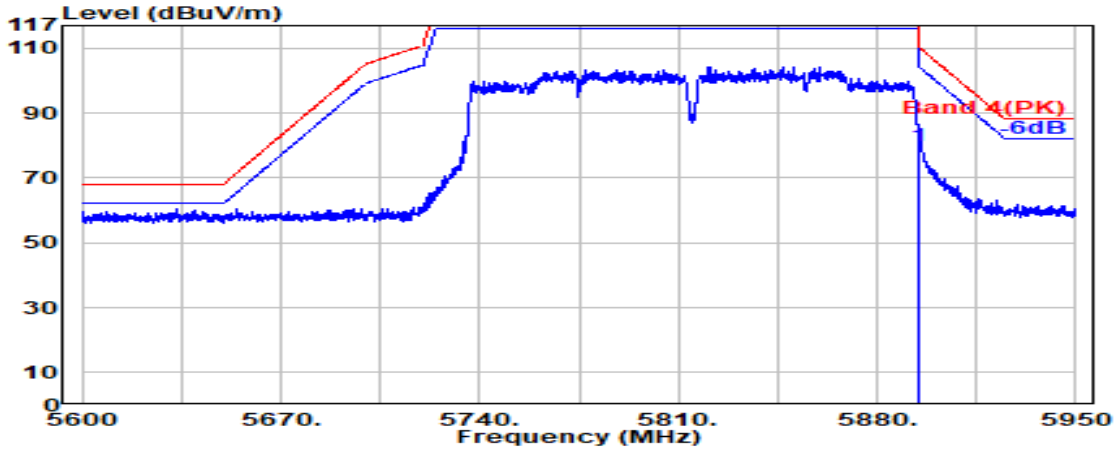

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	76.17	80.10	110.16	30.06	Peak

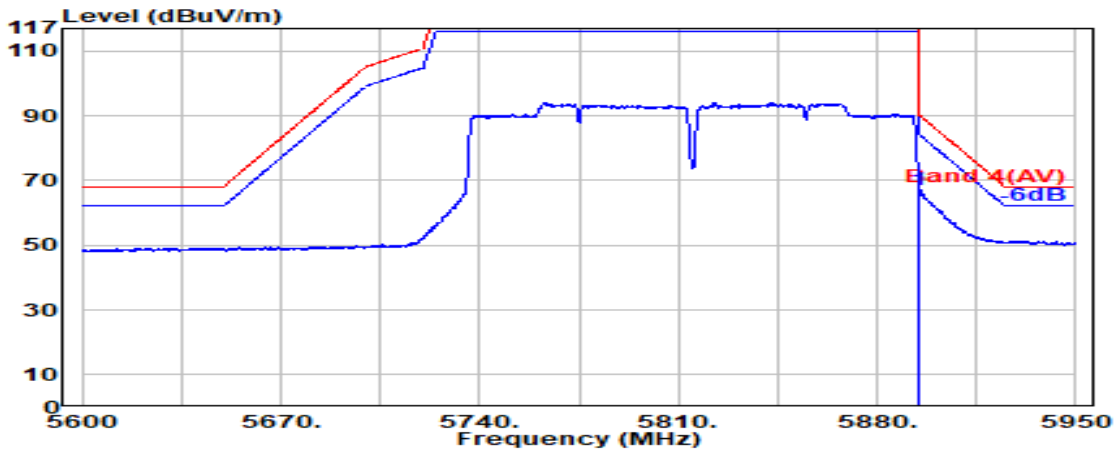


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	63.22	67.15	90.16	23.01	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

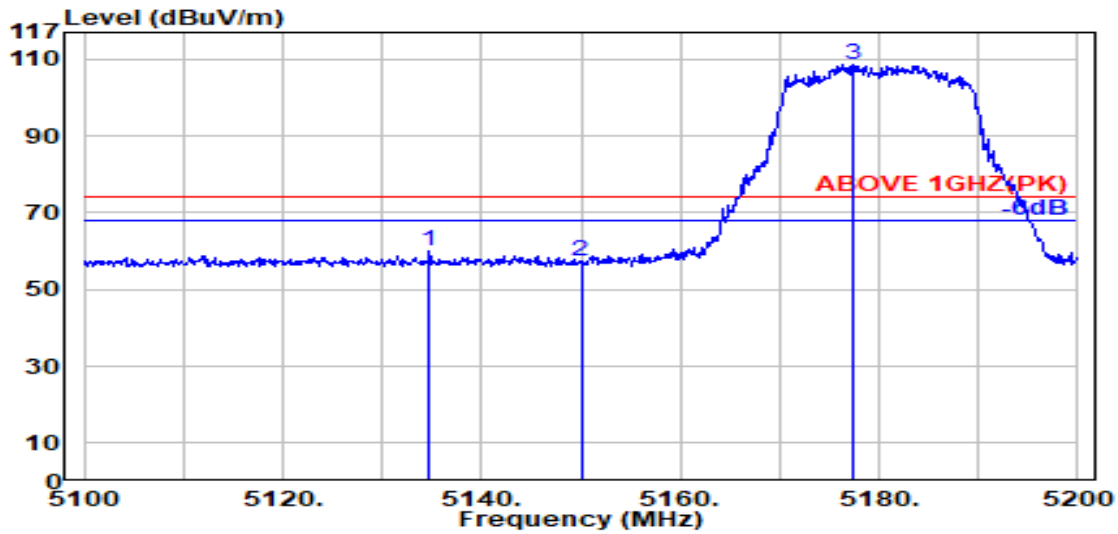

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.800	33.47	8.36	39.19	57.27	59.90	74.00	14.10	Peak
5150.000	33.50	8.37	39.19	54.62	57.31	74.00	16.69	Peak
@ 5177.500	33.67	8.40	39.19	105.77	108.65	---	---	Peak

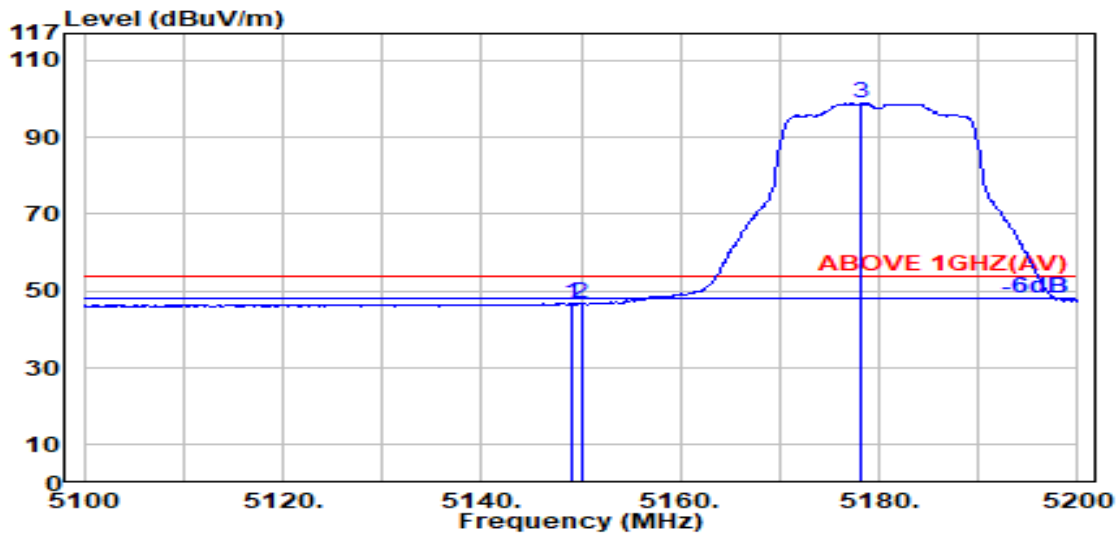


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.19	44.20	46.88	54.00	7.12	Average
5150.000	33.50	8.37	39.19	44.06	46.74	54.00	7.26	Average
@ 5178.200	33.67	8.40	39.19	96.03	98.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

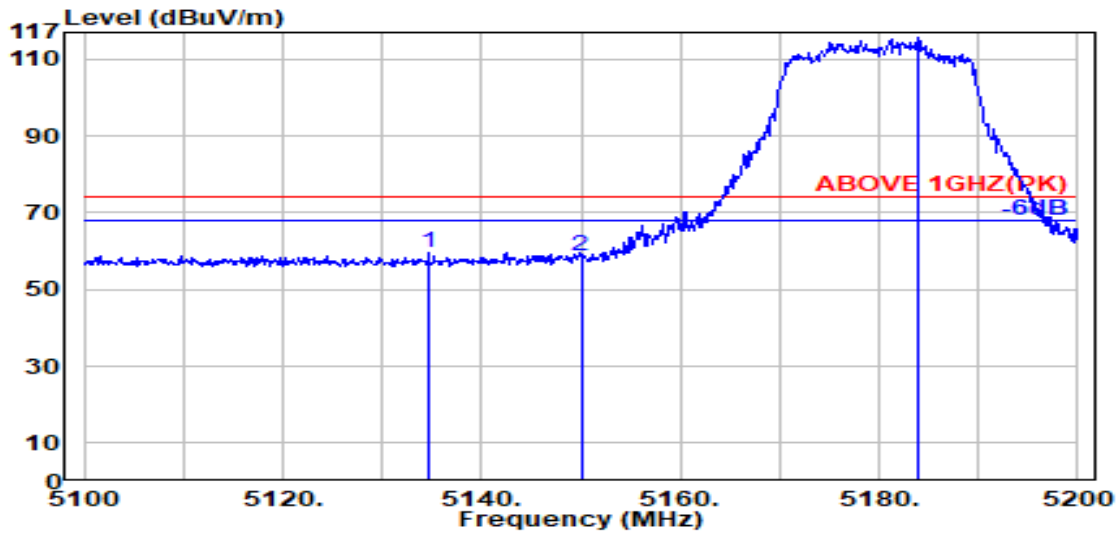

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.700	33.47	8.36	39.19	57.01	59.65	74.00	14.35	Peak
5150.000	33.50	8.37	39.19	56.10	58.78	74.00	15.22	Peak
@ 5184.000	33.70	8.41	39.19	112.63	115.56	---	---	Peak

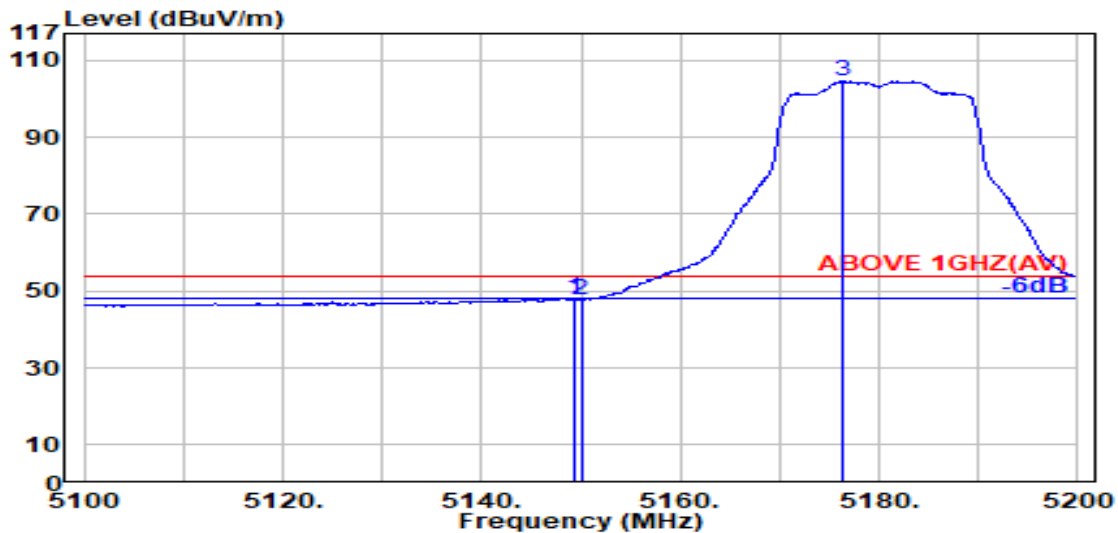


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	45.41	48.09	54.00	5.91	Average
5150.000	33.50	8.37	39.19	45.19	47.87	54.00	6.13	Average
@ 5176.300	33.66	8.40	39.19	101.79	104.66	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

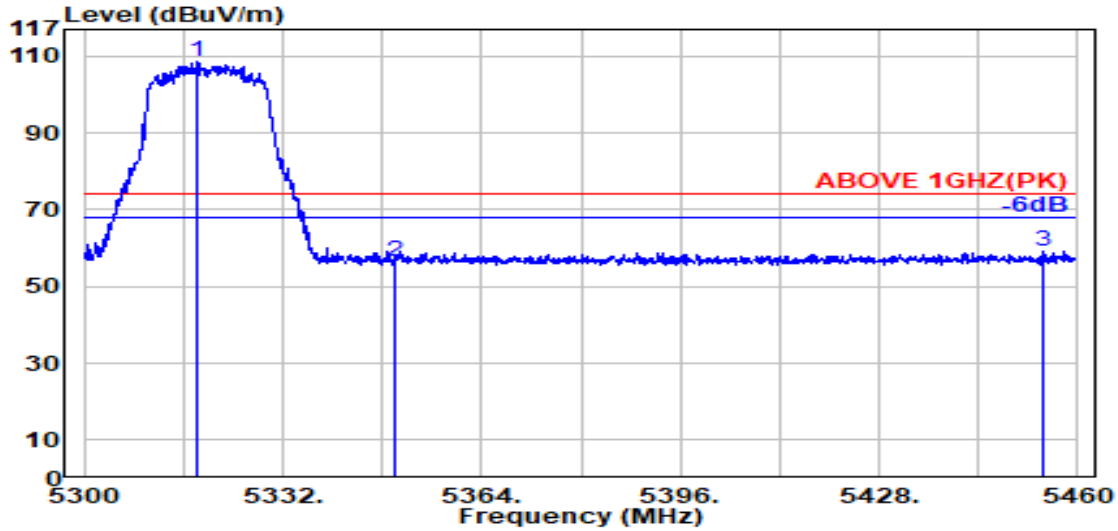

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.300	33.76	8.54	39.17	105.38	108.51	---	---	Peak
5350.000	33.70	8.57	39.17	53.59	56.69	74.00	17.31	Peak
5454.600	34.01	8.67	39.16	55.51	59.04	74.00	14.96	Peak

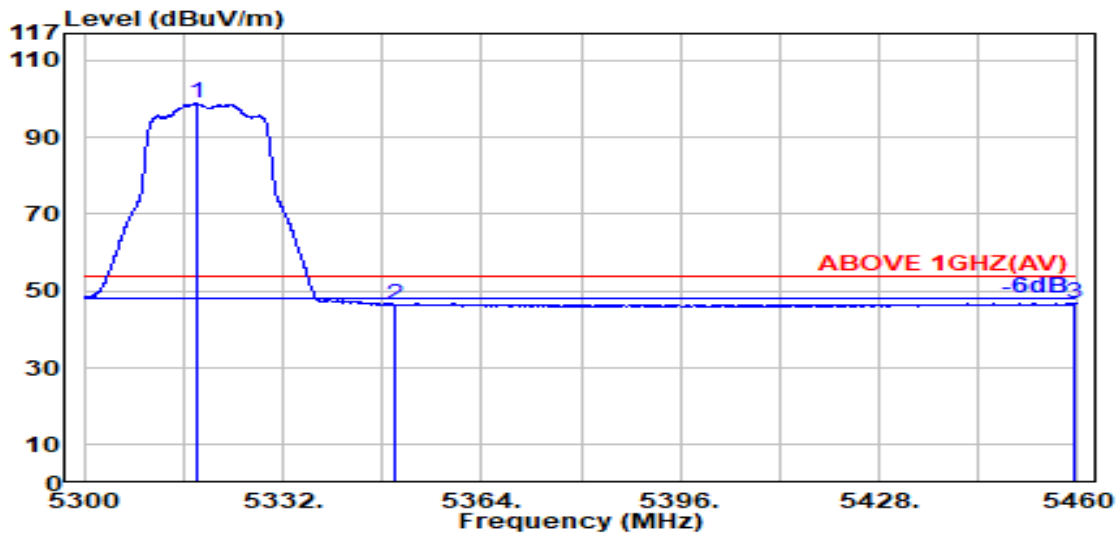


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	33.76	8.54	39.17	95.69	98.83	---	---	Average
5350.000	33.70	8.57	39.17	43.36	46.46	54.00	7.54	Average
5459.600	34.02	8.68	39.15	43.24	46.78	54.00	7.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

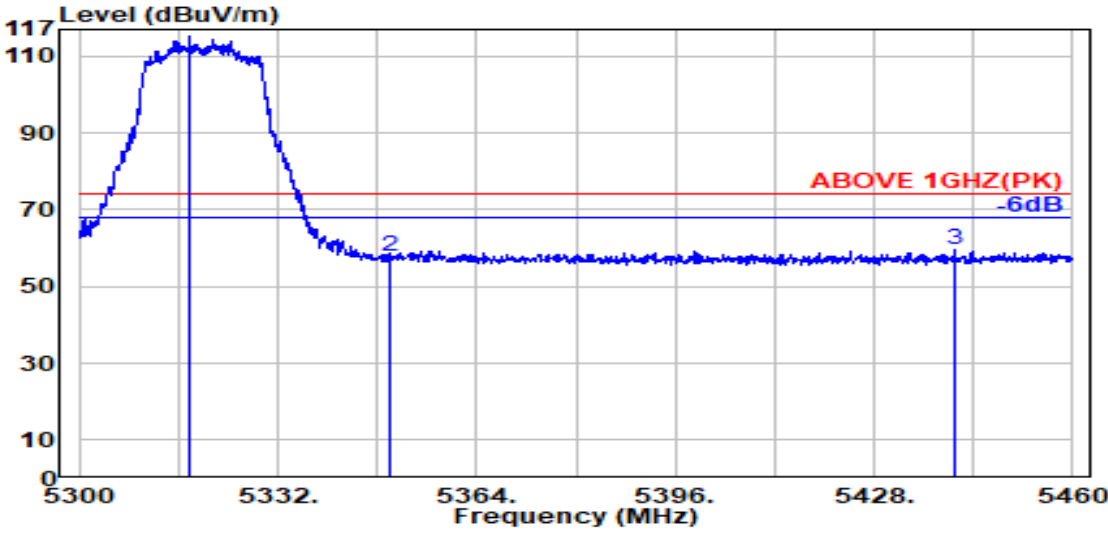

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.800	33.76	8.54	39.17	112.20	115.34	---	---	Peak
5350.000	33.70	8.57	39.17	54.93	58.03	74.00	15.97	Peak
5440.800	33.98	8.66	39.16	56.17	59.65	74.00	14.35	Peak

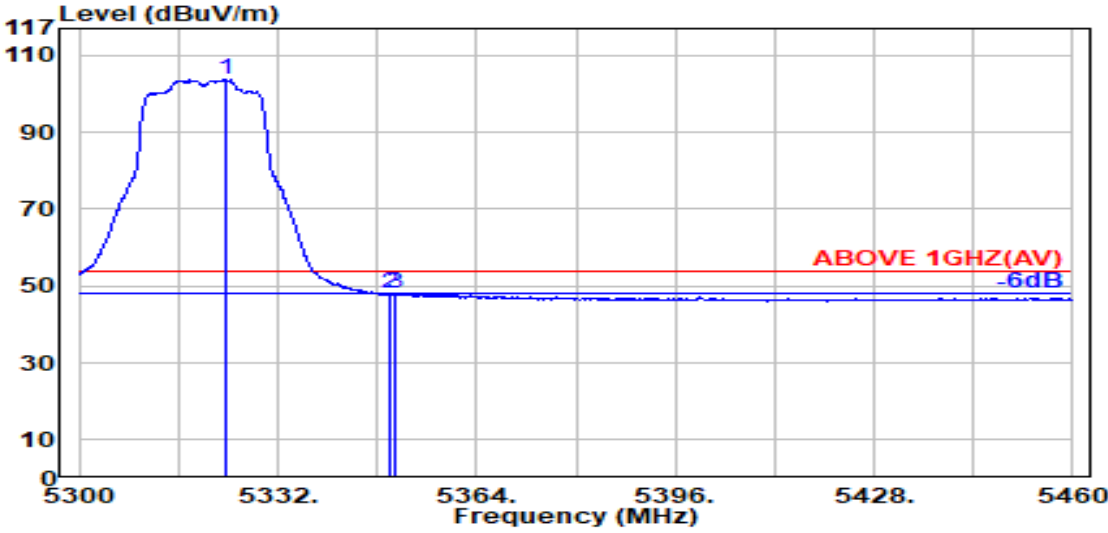


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	33.75	8.55	39.17	100.56	103.69	---	---	Average
5350.000	33.70	8.57	39.17	44.80	47.91	54.00	6.09	Average
5350.800	33.70	8.57	39.17	44.87	47.98	54.00	6.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

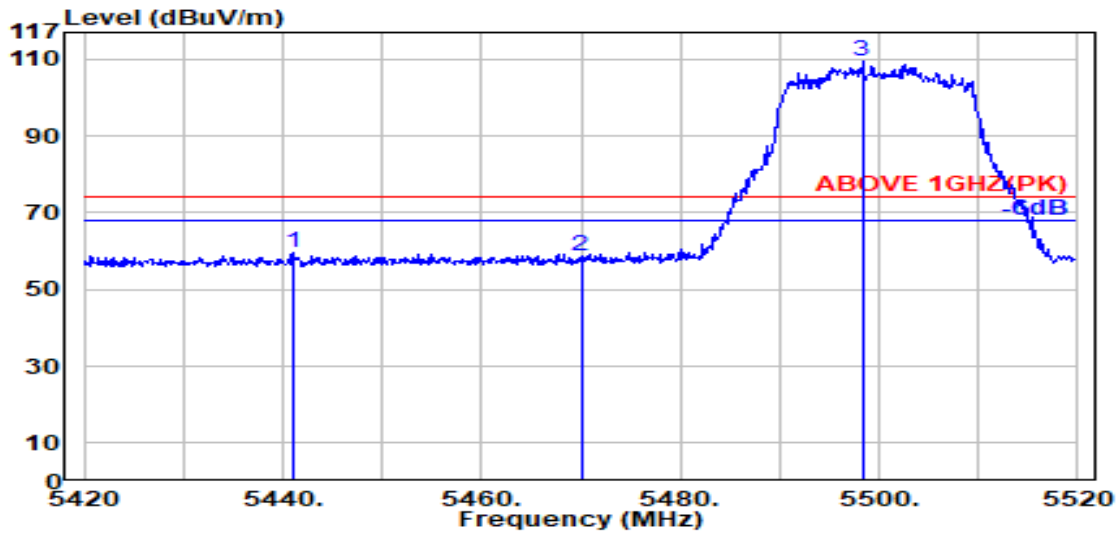

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.000	33.98	8.66	39.16	55.94	59.43	74.00	14.57	Peak
5470.000	34.04	8.69	39.15	55.02	58.59	74.00	15.41	Peak
@ 5498.300	34.10	8.72	39.15	105.62	109.28	---	---	Peak

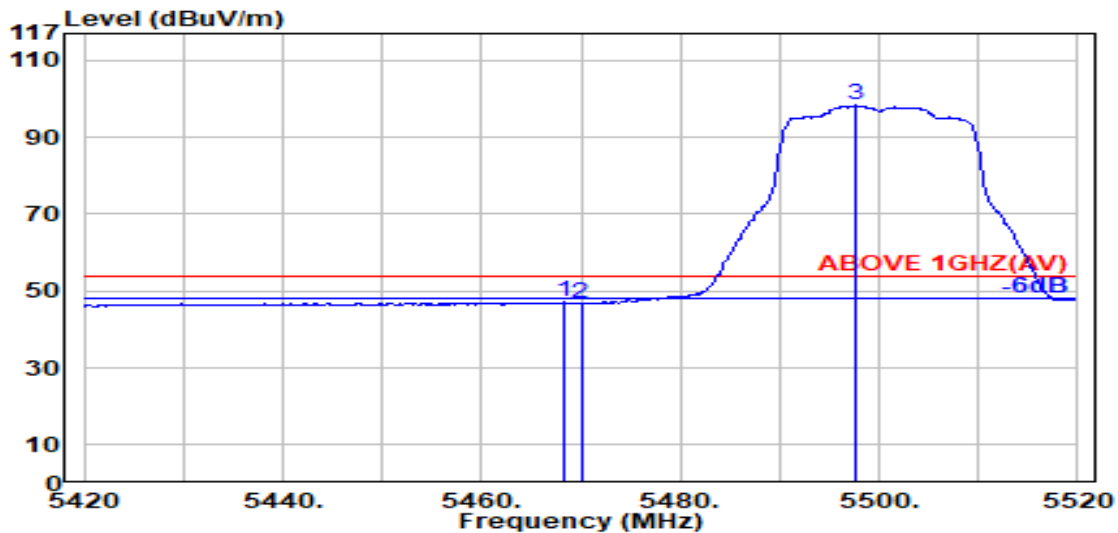


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.04	8.69	39.15	43.51	47.08	54.00	6.92	Average
5470.000	34.04	8.69	39.15	43.22	46.79	54.00	7.21	Average
@ 5497.700	34.10	8.71	39.15	94.68	98.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

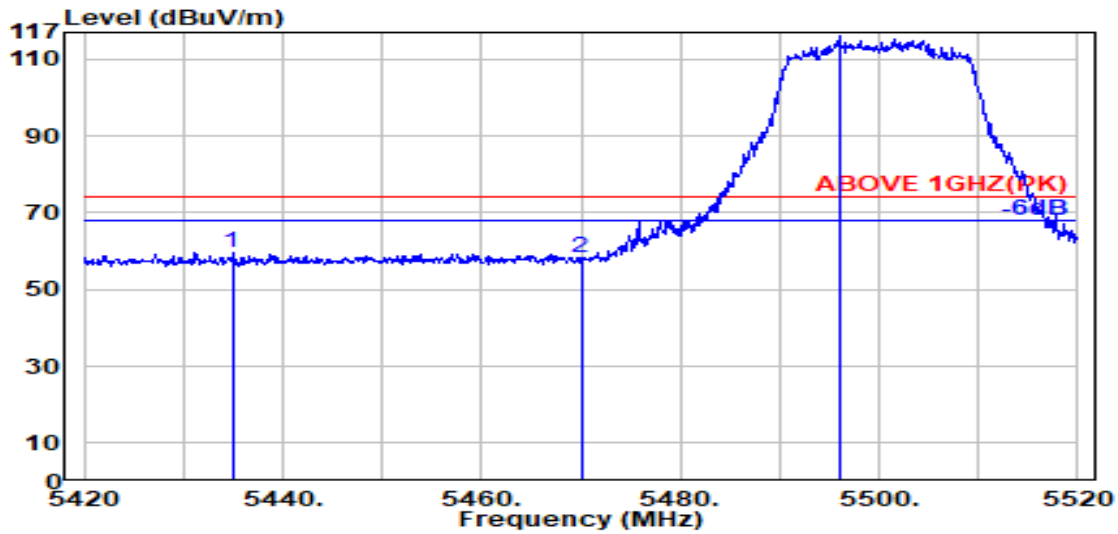

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.900	33.97	8.65	39.16	56.07	59.54	74.00	14.46	Peak
5470.000	34.04	8.69	39.15	54.55	58.13	74.00	15.87	Peak
@ 5496.000	34.09	8.71	39.15	112.61	116.27	---	---	Peak

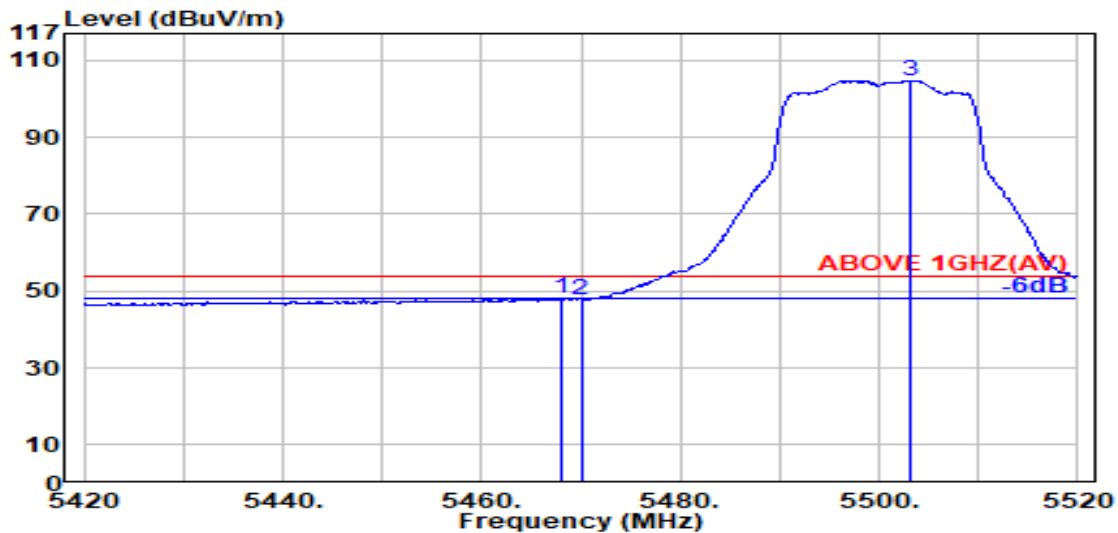


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	44.51	48.08	54.00	5.92	Average
5470.000	34.04	8.69	39.15	44.14	47.72	54.00	6.28	Average
@ 5503.100	34.09	8.72	39.15	101.09	104.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

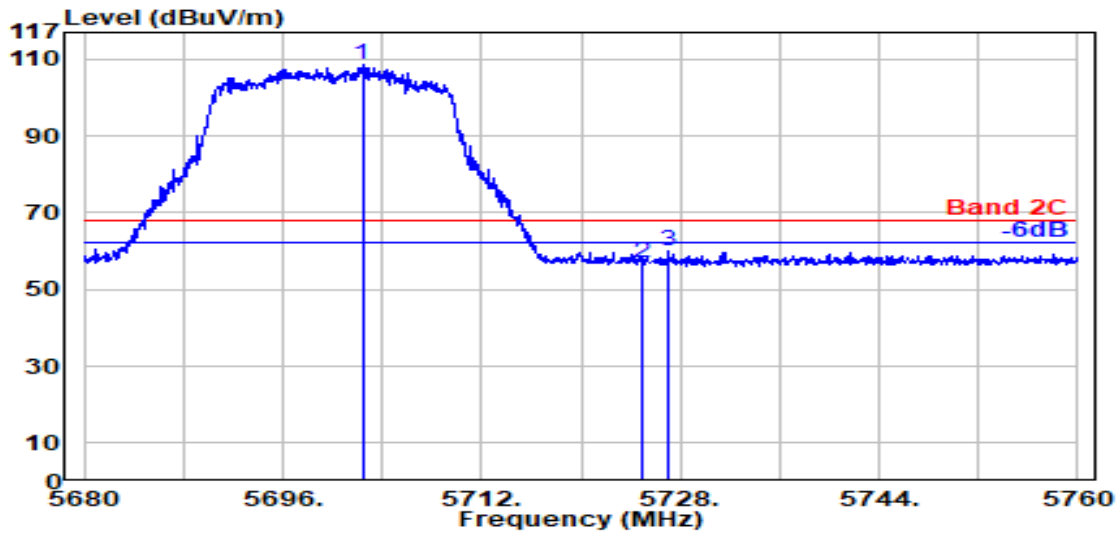

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.400	33.60	8.90	39.19	105.08	108.39	---	---	Peak
5725.000	33.60	8.93	39.20	53.77	57.10	68.20	11.10	Peak
5727.050	33.60	8.93	39.20	56.83	60.16	68.20	8.04	Peak

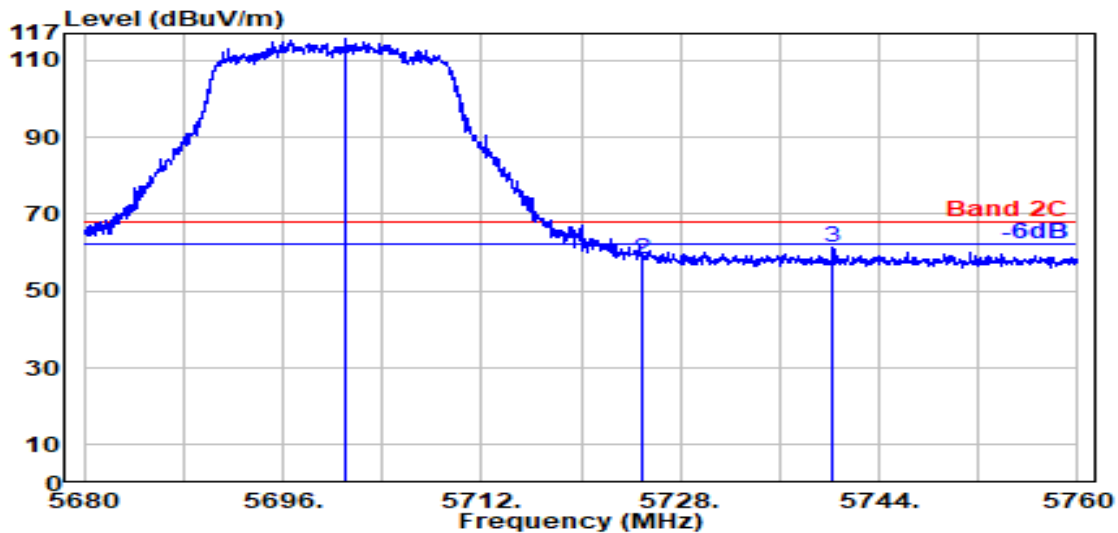


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.100	33.60	8.90	39.19	112.16	115.47	---	---	Peak
5725.000	33.60	8.93	39.20	55.03	58.36	68.20	9.84	Peak
5740.300	33.60	8.94	39.20	57.91	61.25	68.20	6.95	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

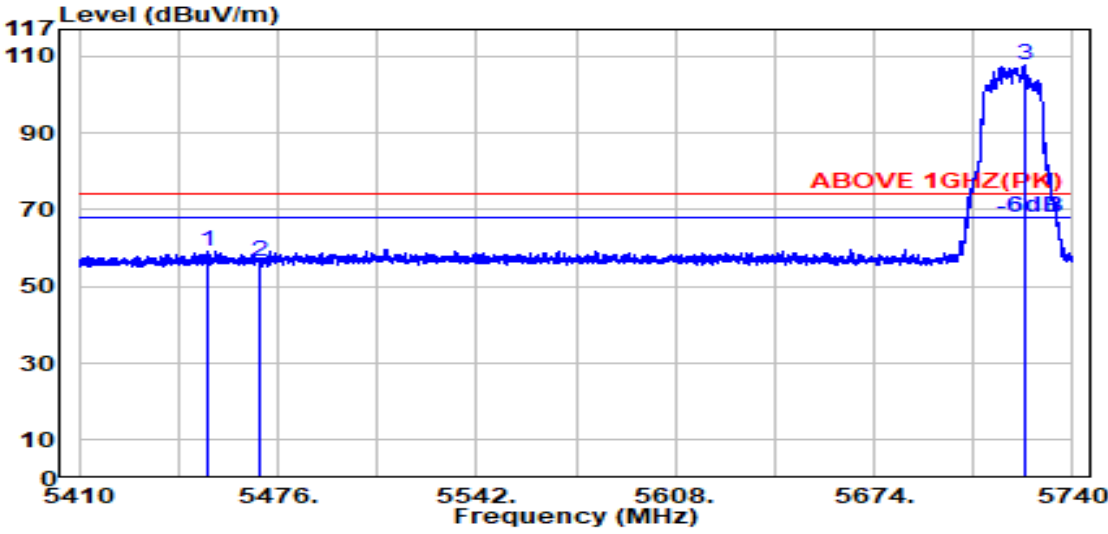

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.100	34.01	8.67	39.16	55.75	59.28	74.00	14.72	Peak
5470.000	34.04	8.69	39.15	53.04	56.62	74.00	17.38	Peak
@ 5723.800	33.60	8.92	39.20	104.27	107.60	---	---	Peak

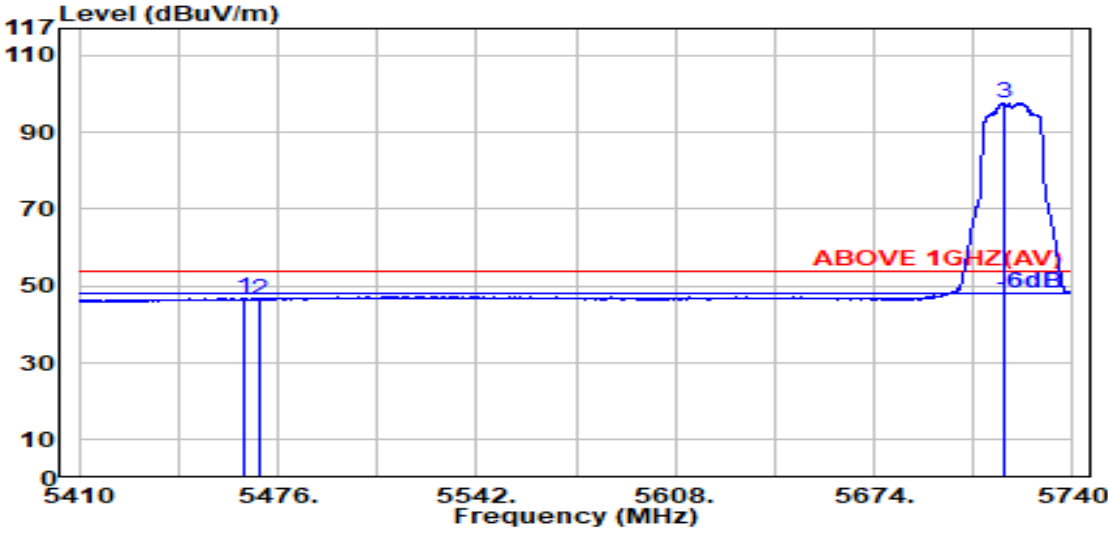


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.03	8.68	39.15	43.22	46.78	54.00	7.22	Average
5470.000	34.04	8.69	39.15	42.95	46.52	54.00	7.48	Average
@ 5716.900	33.60	8.92	39.19	94.29	97.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

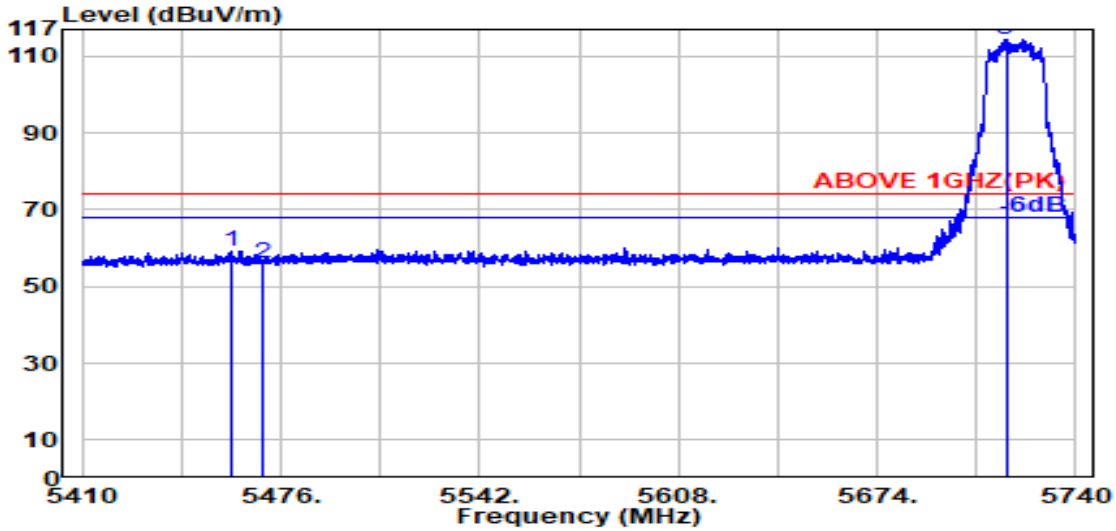

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.700	34.02	8.68	39.15	55.73	59.28	74.00	14.72	Peak
5470.000	34.04	8.69	39.15	52.45	56.03	74.00	17.97	Peak
@ 5716.800	33.60	8.92	39.19	111.18	114.51	---	---	Peak

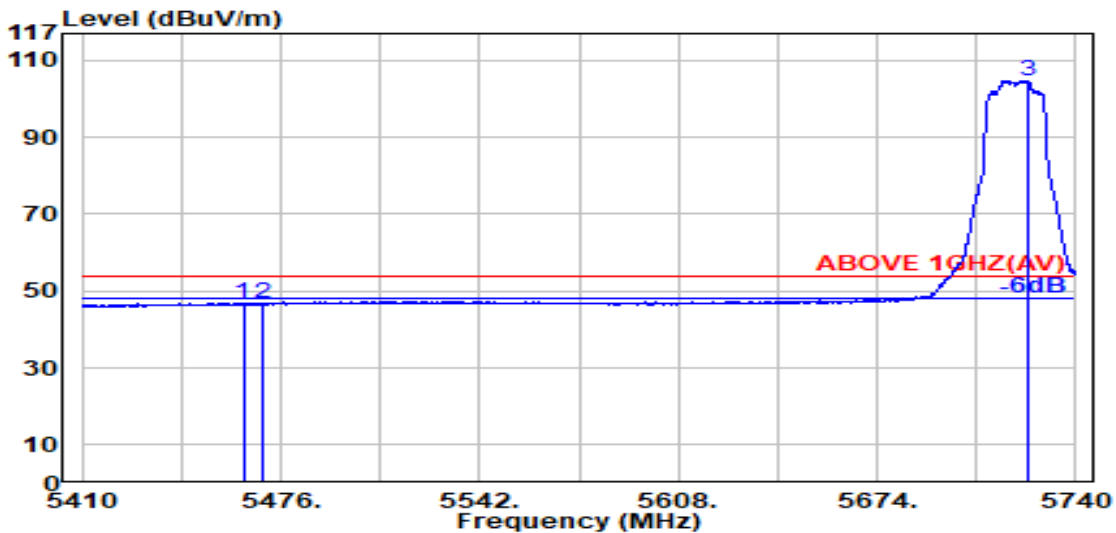

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.03	8.68	39.15	43.34	46.90	54.00	7.10	Average
5470.000	34.04	8.69	39.15	43.03	46.61	54.00	7.39	Average
@ 5723.900	33.60	8.92	39.20	101.52	104.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

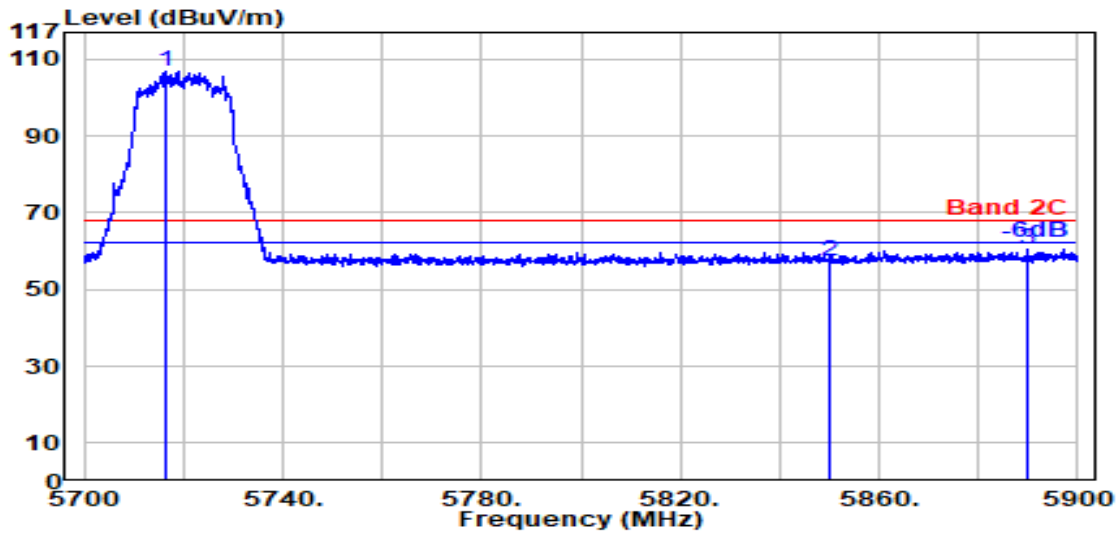

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.600	33.60	8.92	39.19	103.53	106.85	---	---	Peak
5850.000	33.90	9.04	39.22	53.86	57.58	68.20	10.62	Peak
5890.000	34.06	9.07	39.23	56.45	60.36	68.20	7.84	Peak

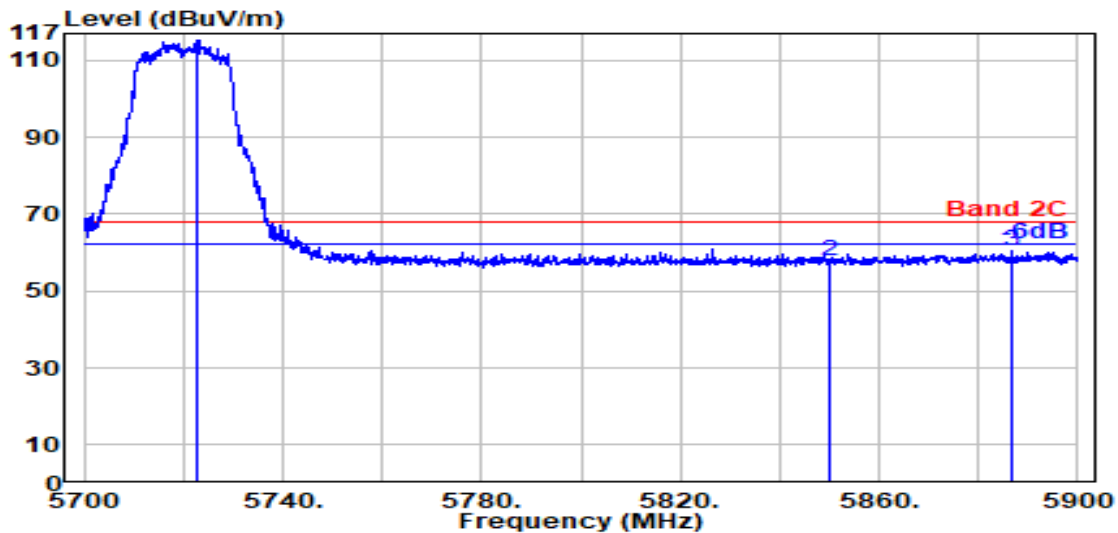


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.900	33.60	8.92	39.20	111.94	115.27	---	---	Peak
5850.000	33.90	9.04	39.22	54.03	57.75	68.20	10.45	Peak
5886.500	34.05	9.07	39.23	56.60	60.48	68.20	7.72	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

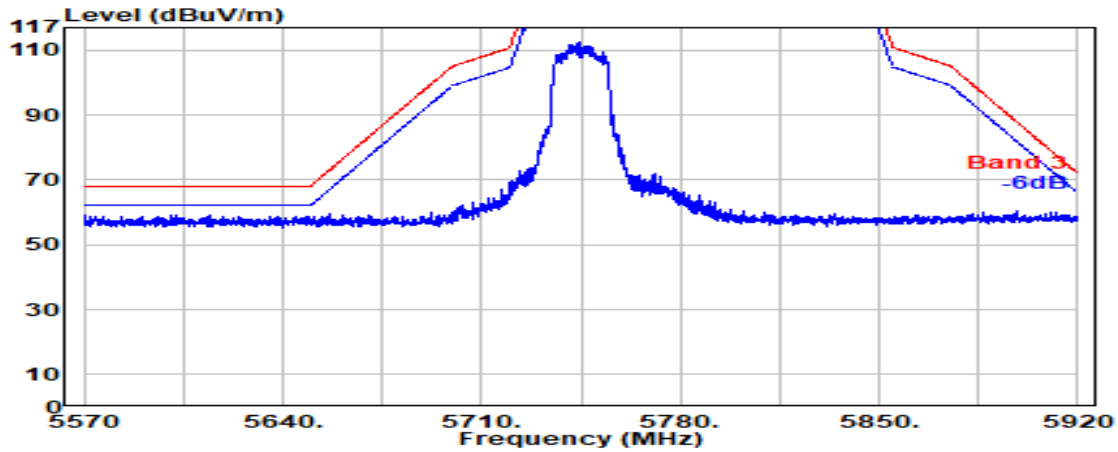


Antenna at Vertical Polarization

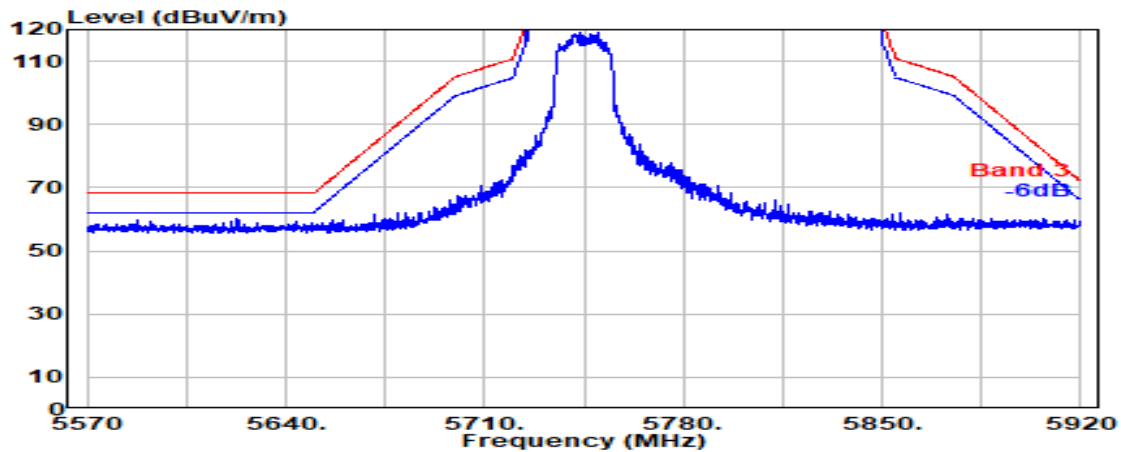


Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

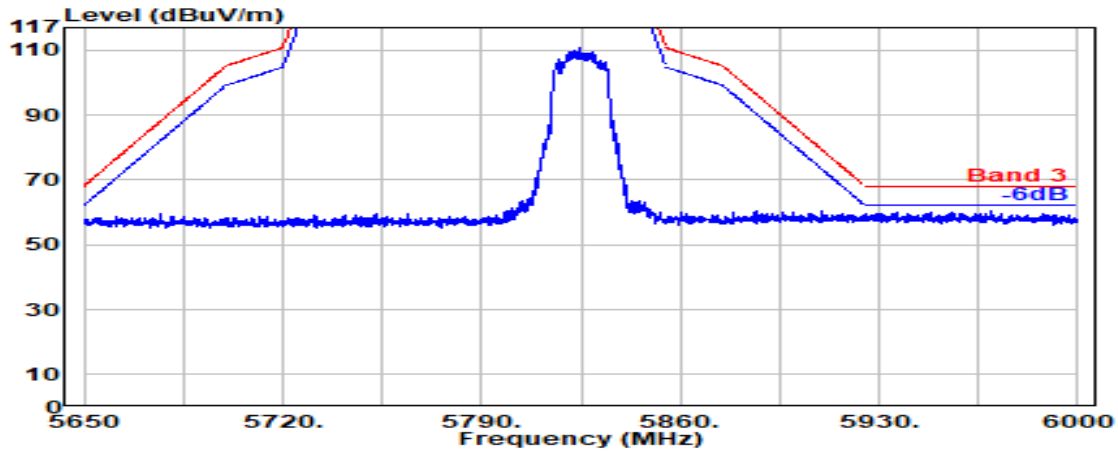

Antenna at Vertical Polarization

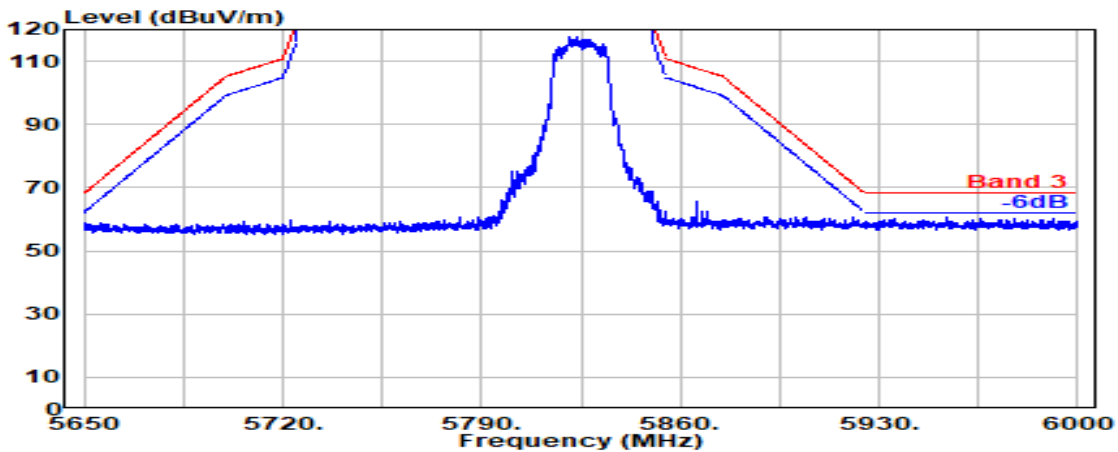


Mode	802.11ax-HE20	U-NII Band	4
		Frequency	TX 5885MHz

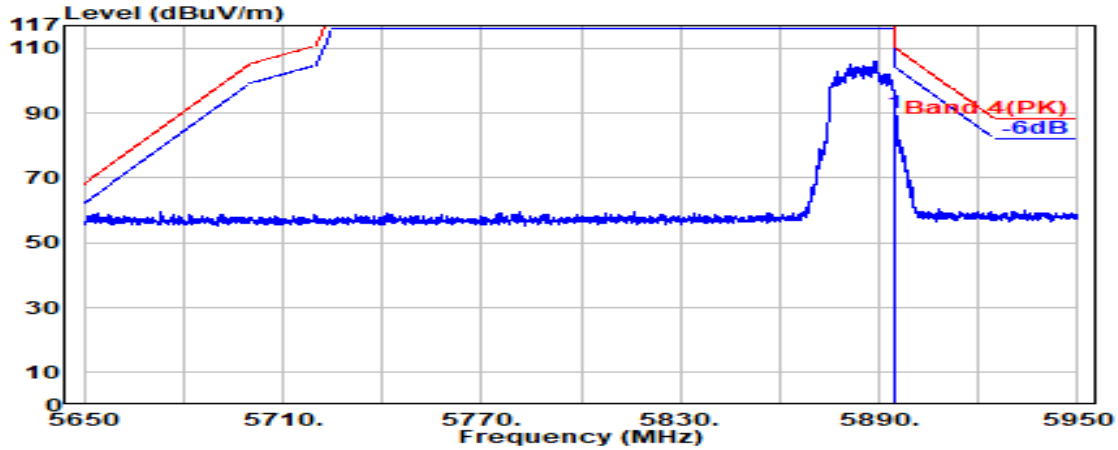

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	86.12	90.04	110.20	20.16	Peak

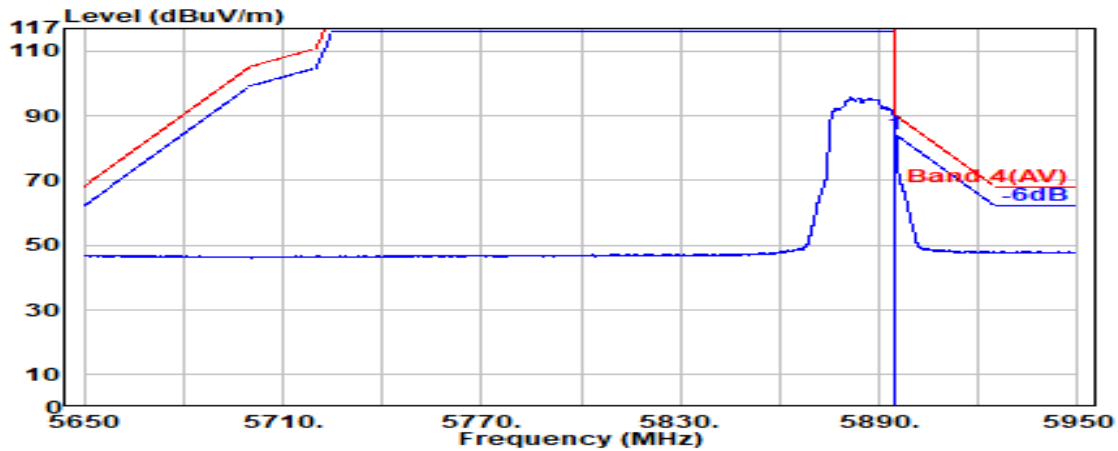


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	80.39	84.32	90.20	5.88	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE20	U-NII Band	4
		Frequency	TX 5885MHz

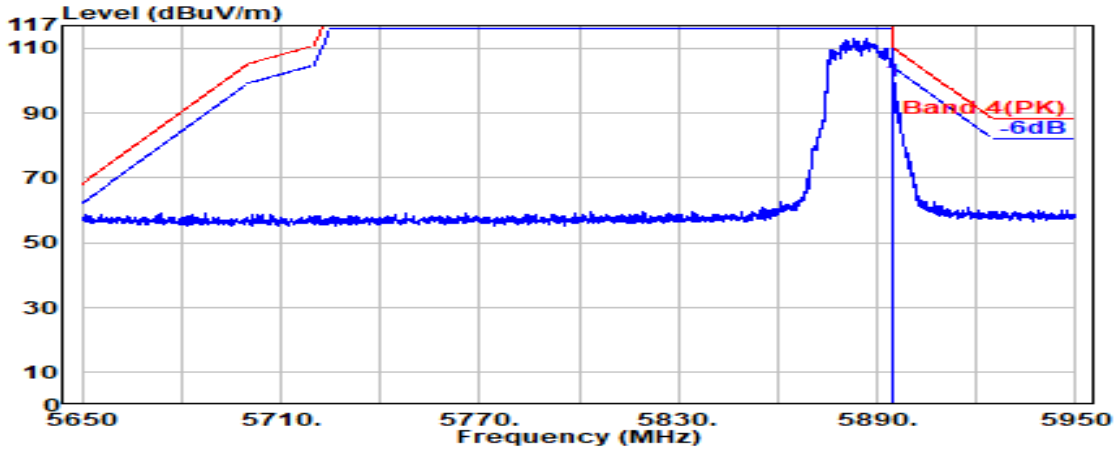

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	95.74	99.67	110.20	10.53	Peak

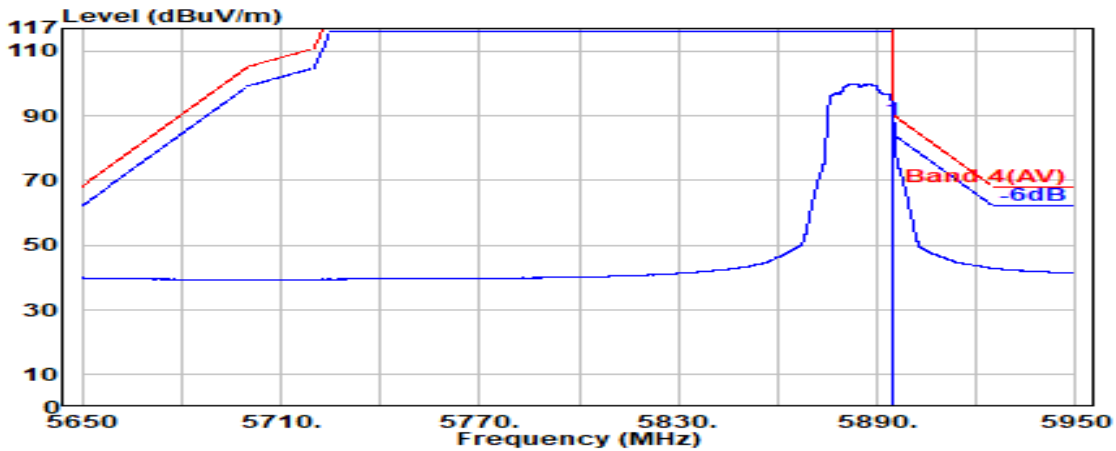


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	84.73	88.66	90.20	1.54	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

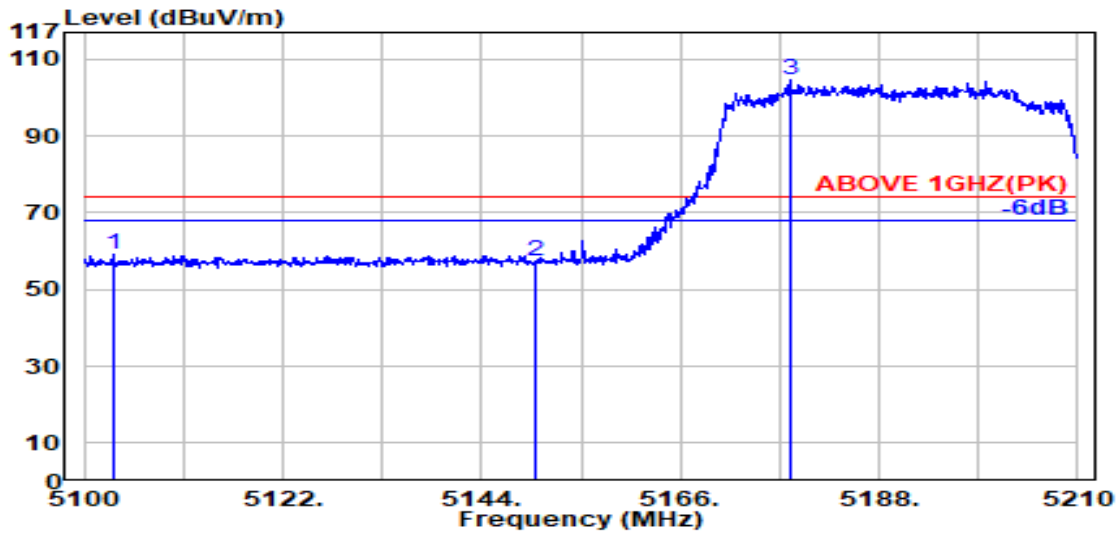

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.200	33.41	8.33	39.20	56.51	59.05	74.00	14.95	Peak
5150.000	33.50	8.37	39.19	54.62	57.30	74.00	16.70	Peak
@ 5178.100	33.67	8.40	39.19	101.81	104.69	---	---	Peak

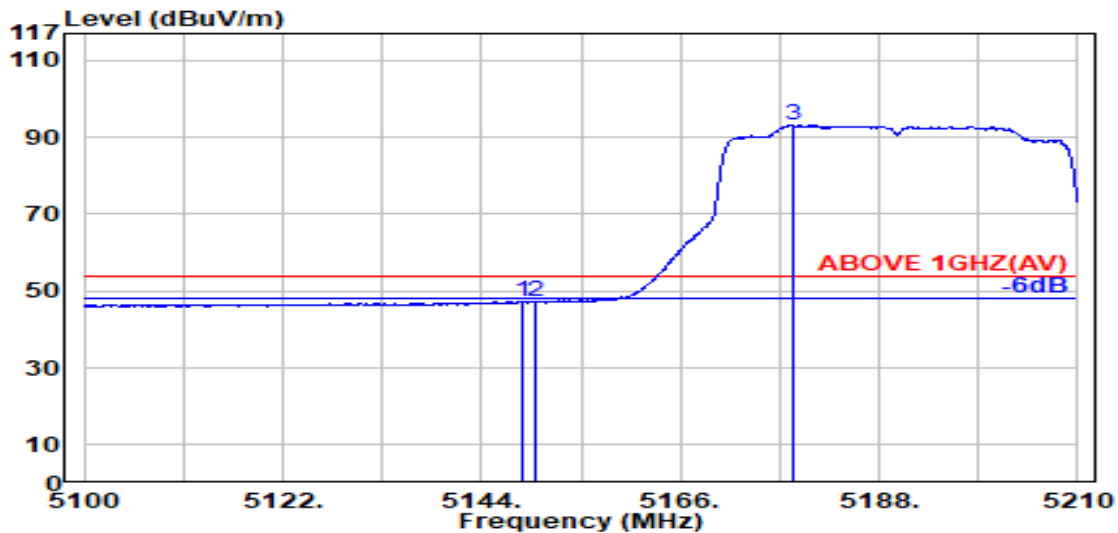


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.50	8.37	39.19	44.63	47.31	54.00	6.69	Average
5150.000	33.50	8.37	39.19	44.51	47.19	54.00	6.81	Average
@ 5178.400	33.67	8.40	39.19	90.34	93.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

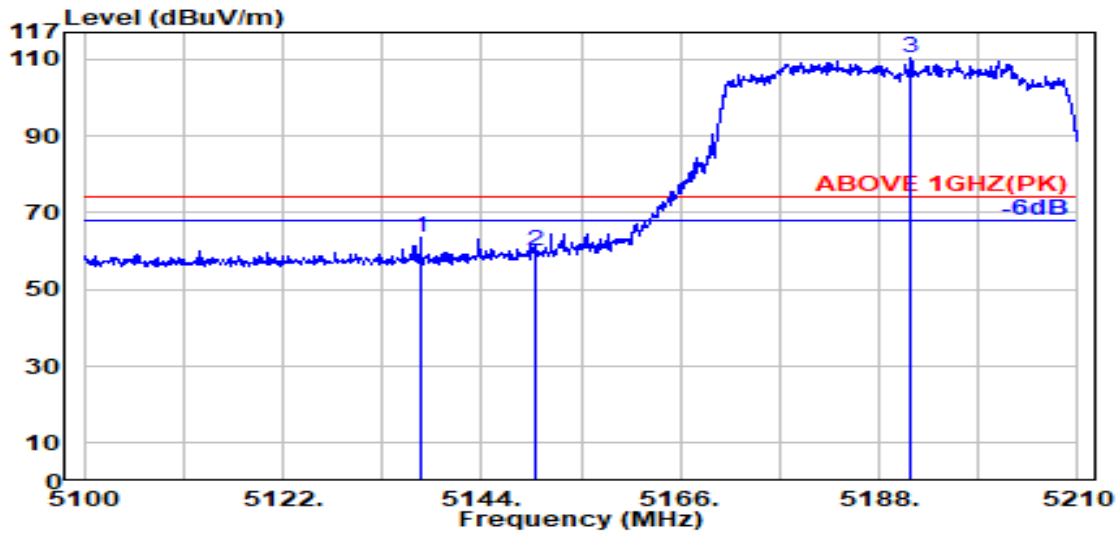

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.300	33.47	8.36	39.19	60.83	63.47	74.00	10.53	Peak
5150.000	33.50	8.37	39.19	57.35	60.04	74.00	13.96	Peak
@ 5191.500	33.75	8.42	39.19	107.51	110.49	---	---	Peak

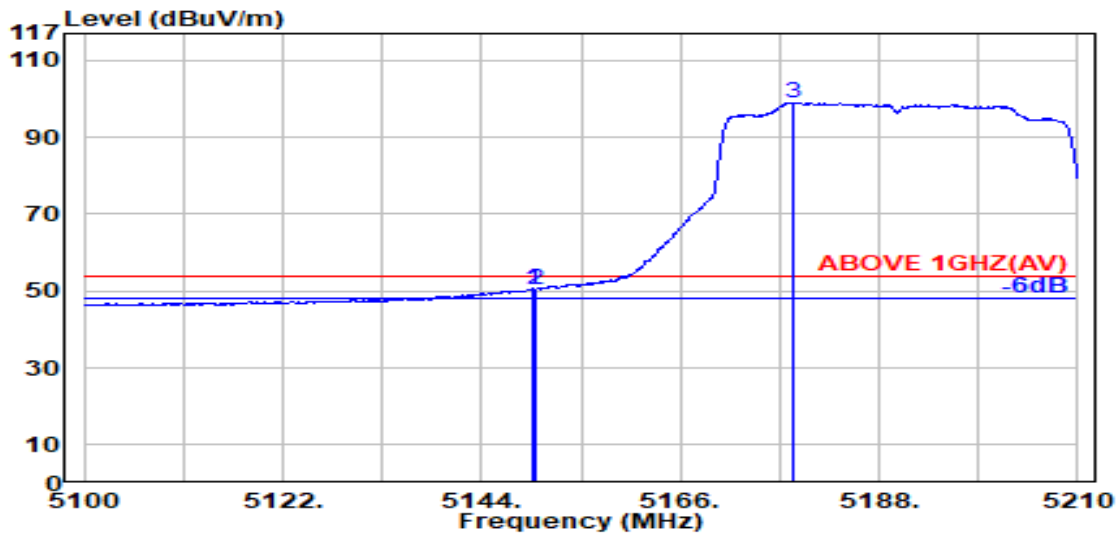


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.19	47.86	50.54	54.00	3.46	Average
5150.000	33.50	8.37	39.19	47.68	50.37	54.00	3.63	Average
@ 5178.500	33.67	8.40	39.19	96.07	98.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

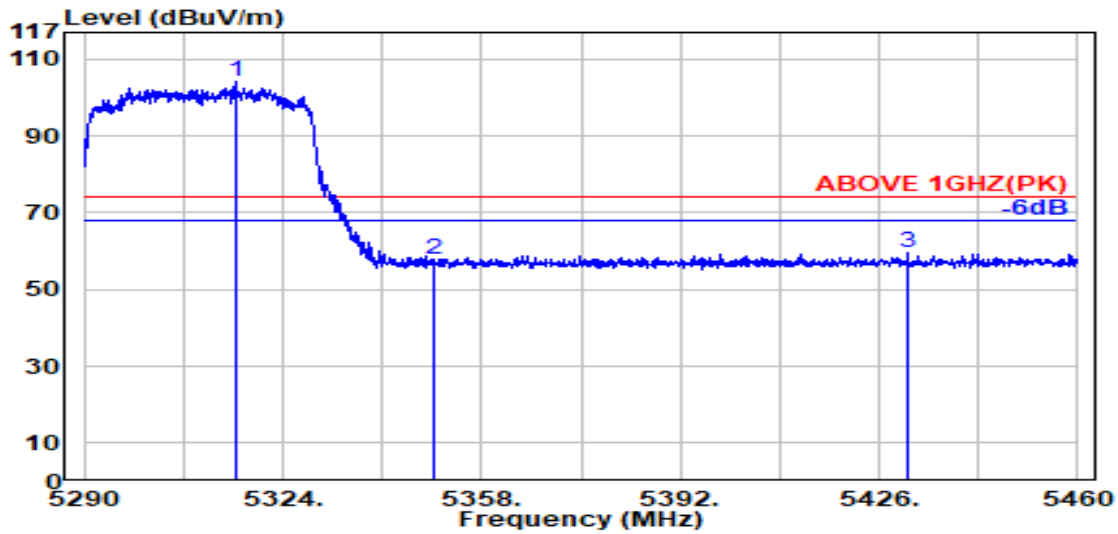

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.800	33.77	8.54	39.17	101.08	104.22	---	---	Peak
5350.000	33.70	8.57	39.17	54.58	57.69	74.00	16.31	Peak
5430.800	33.96	8.65	39.16	56.37	59.82	74.00	14.18	Peak

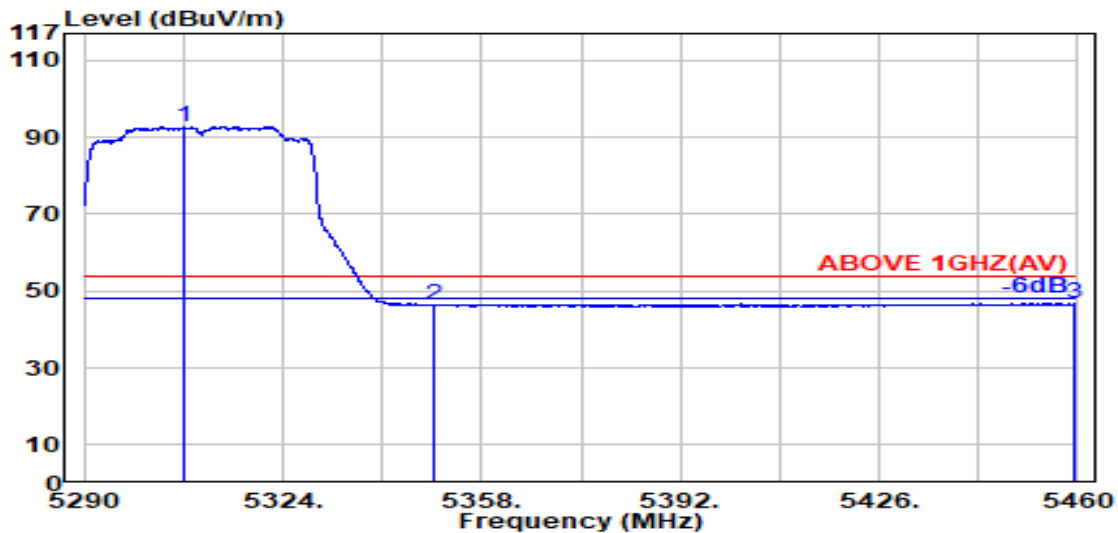


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.000	33.79	8.53	39.17	89.64	92.79	---	---	Average
5350.000	33.70	8.57	39.17	43.19	46.30	54.00	7.70	Average
5459.400	34.02	8.68	39.15	43.18	46.72	54.00	7.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

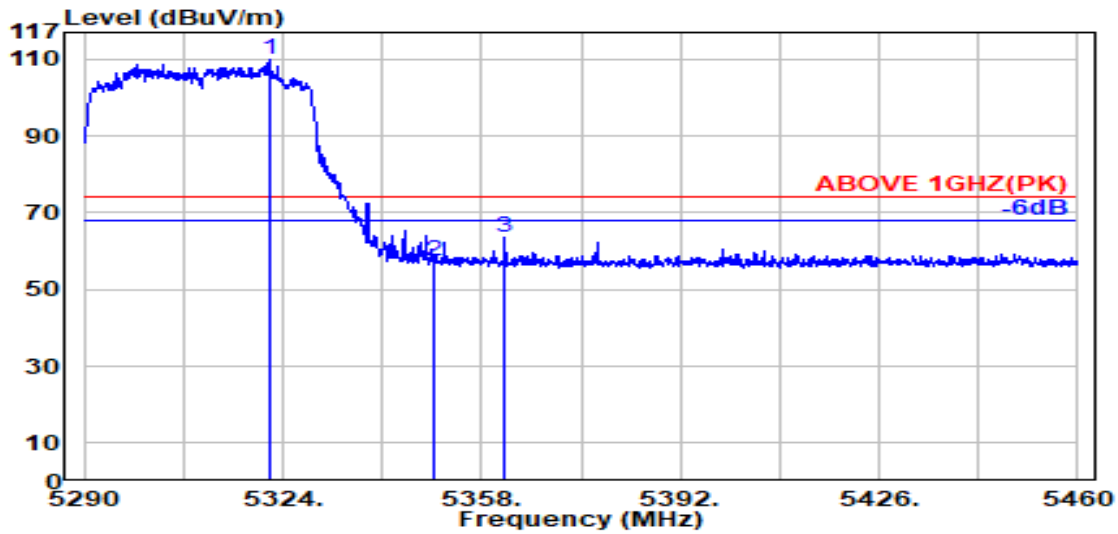

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.900	33.76	8.55	39.17	106.79	109.92	---	---	Peak
5350.000	33.70	8.57	39.17	54.21	57.31	74.00	16.69	Peak
5362.000	33.75	8.58	39.17	60.27	63.44	74.00	10.56	Peak

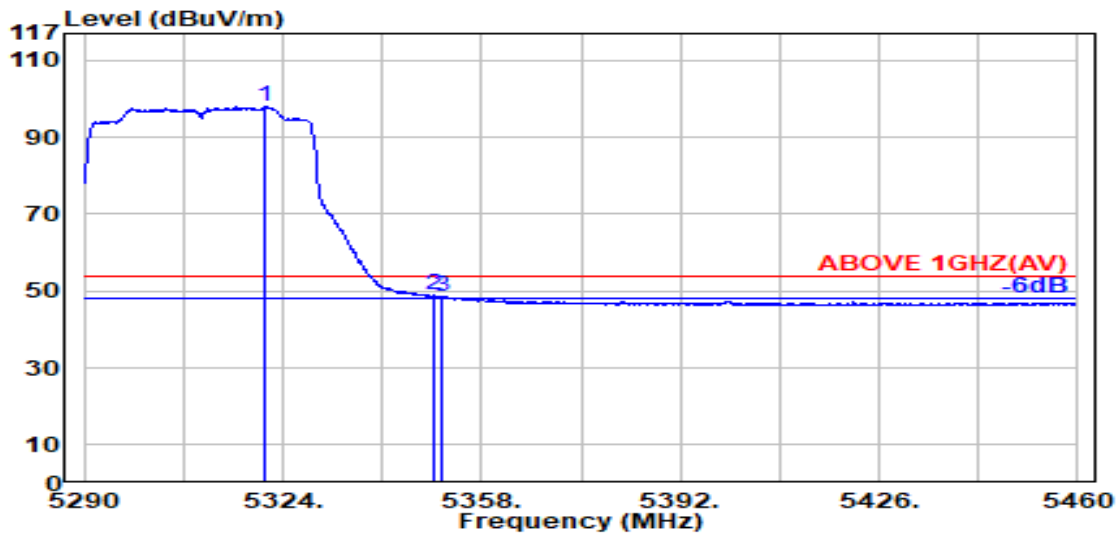


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.100	33.76	8.54	39.17	94.82	97.95	---	---	Average
5350.000	33.70	8.57	39.17	45.81	48.92	54.00	5.08	Average
5351.200	33.70	8.57	39.17	45.52	48.63	54.00	5.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

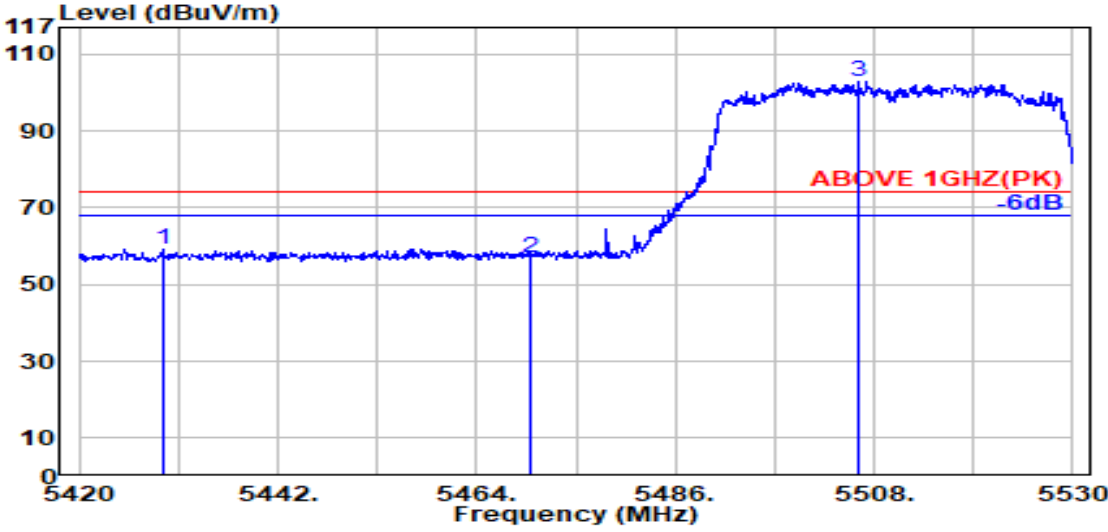

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.200	33.96	8.65	39.16	55.83	59.28	74.00	14.72	Peak
5470.000	34.04	8.69	39.15	53.36	56.94	74.00	17.06	Peak
@ 5506.400	34.09	8.72	39.15	99.32	102.98	---	---	Peak

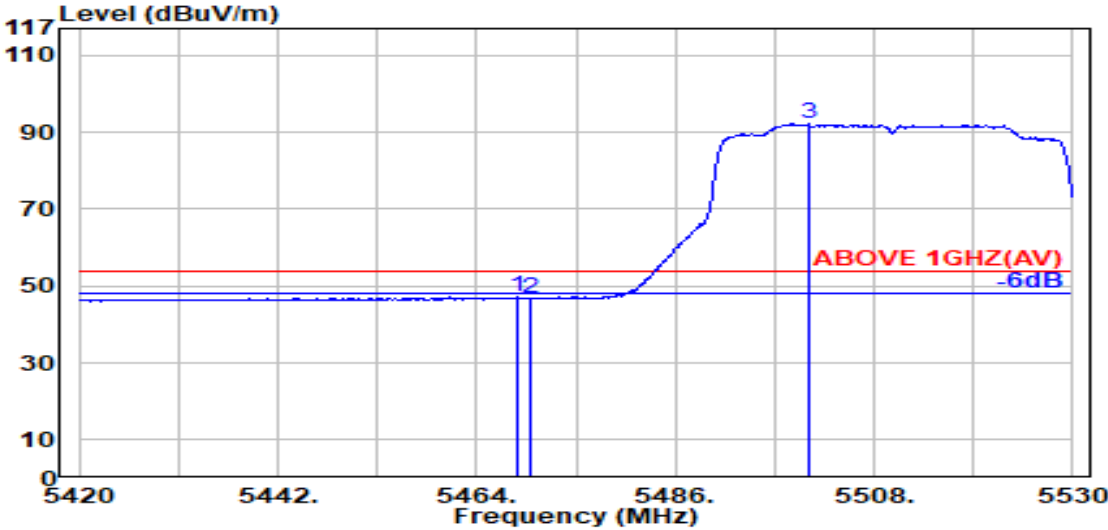


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	43.56	47.13	54.00	6.87	Average
5470.000	34.04	8.69	39.15	43.29	46.87	54.00	7.13	Average
@ 5500.900	34.10	8.72	39.15	88.58	92.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

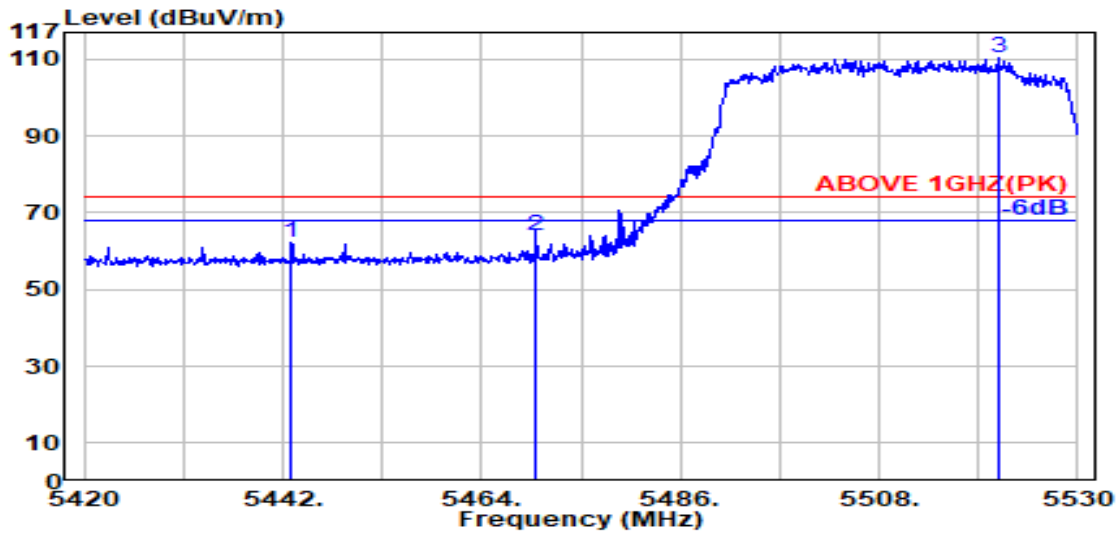

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5443.000	33.99	8.66	39.16	58.79	62.28	74.00	11.72	Peak
5470.000	34.04	8.69	39.15	60.23	63.81	74.00	10.19	Peak
@ 5521.200	34.06	8.74	39.15	106.63	110.27	---	---	Peak

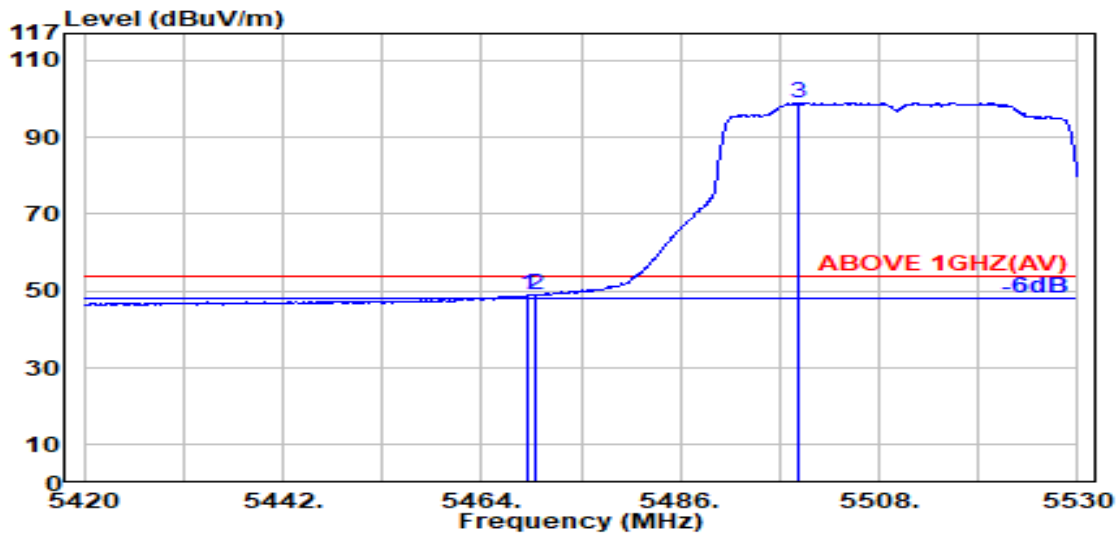


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	45.28	48.85	54.00	5.15	Average
5470.000	34.04	8.69	39.15	45.50	49.08	54.00	4.92	Average
@ 5499.000	34.10	8.72	39.15	95.40	99.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

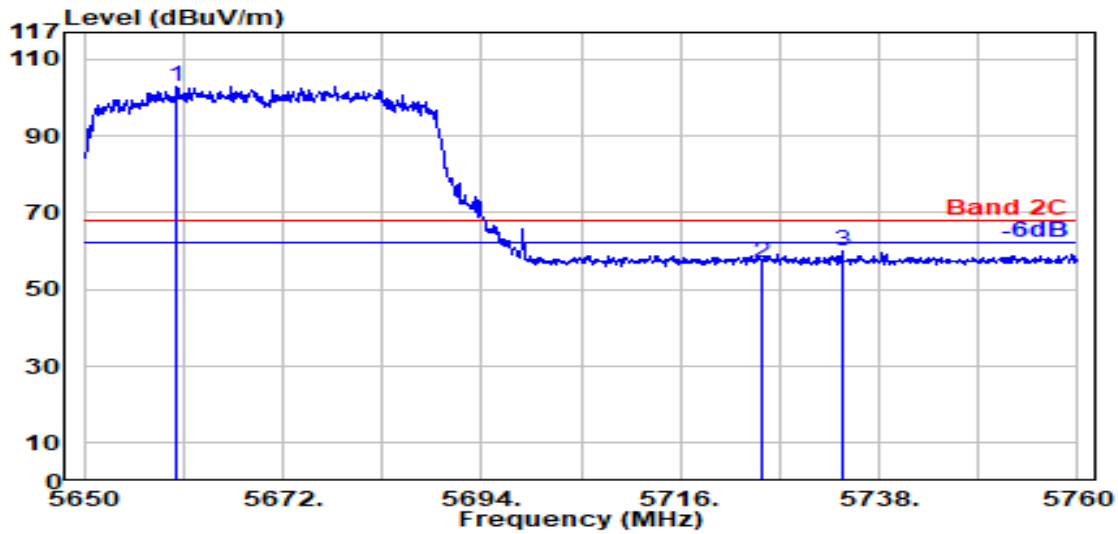

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5660.300	33.76	8.87	39.18	99.55	102.99	---	---	Peak
5725.000	33.60	8.93	39.20	53.68	57.01	68.20	11.19	Peak
5733.900	33.60	8.93	39.20	56.77	60.11	68.20	8.09	Peak

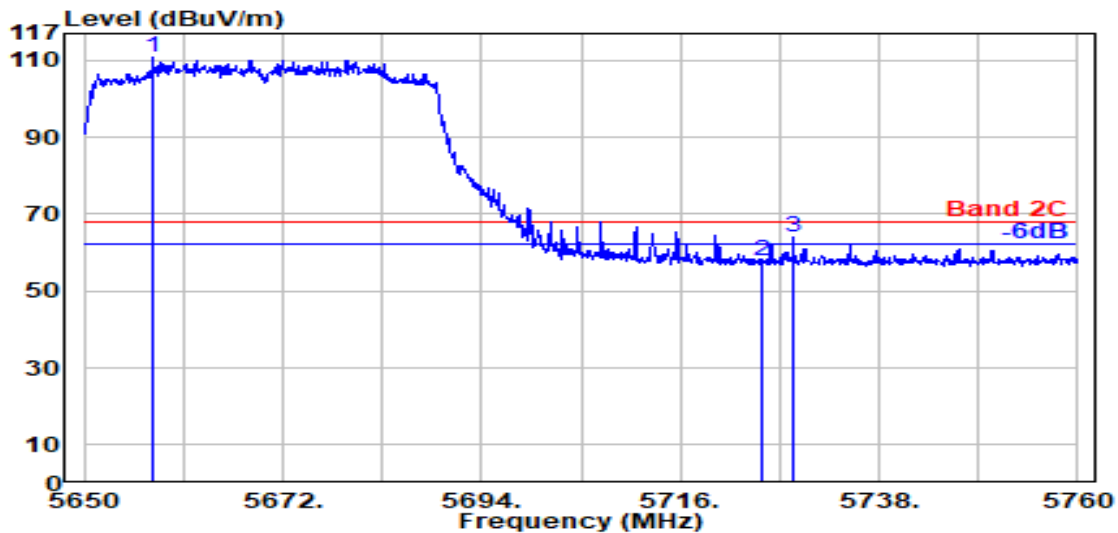


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5657.600	33.77	8.86	39.18	107.36	110.81	---	---	Peak
5725.000	33.60	8.93	39.20	54.33	57.66	68.20	10.54	Peak
5728.500	33.60	8.93	39.20	60.84	64.18	68.20	4.02	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

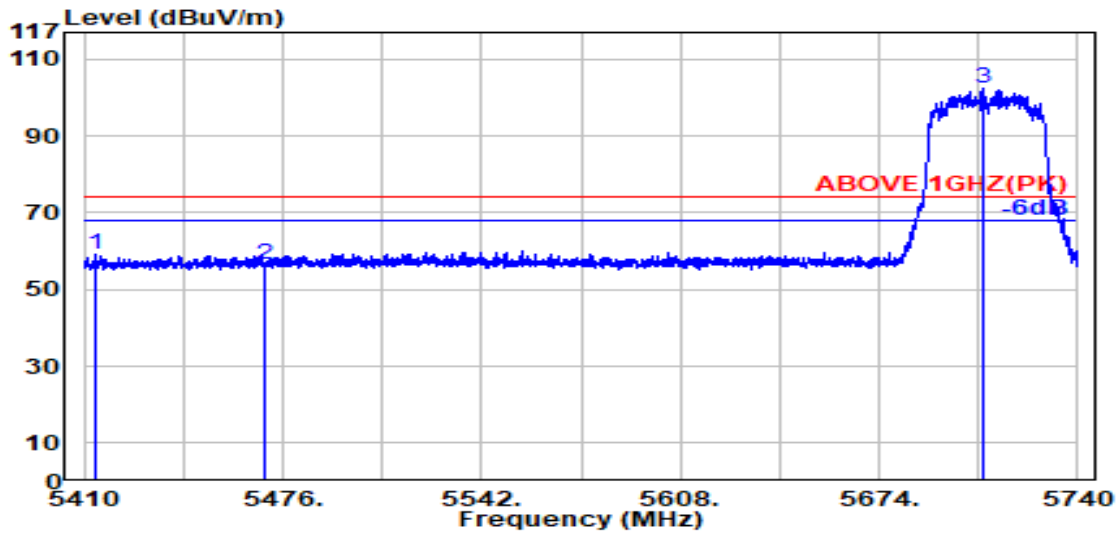

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5413.800	33.93	8.63	39.16	55.80	59.21	74.00	14.79	Peak
5470.000	34.04	8.69	39.15	53.14	56.71	74.00	17.29	Peak
@ 5708.200	33.60	8.91	39.19	99.06	102.38	---	---	Peak

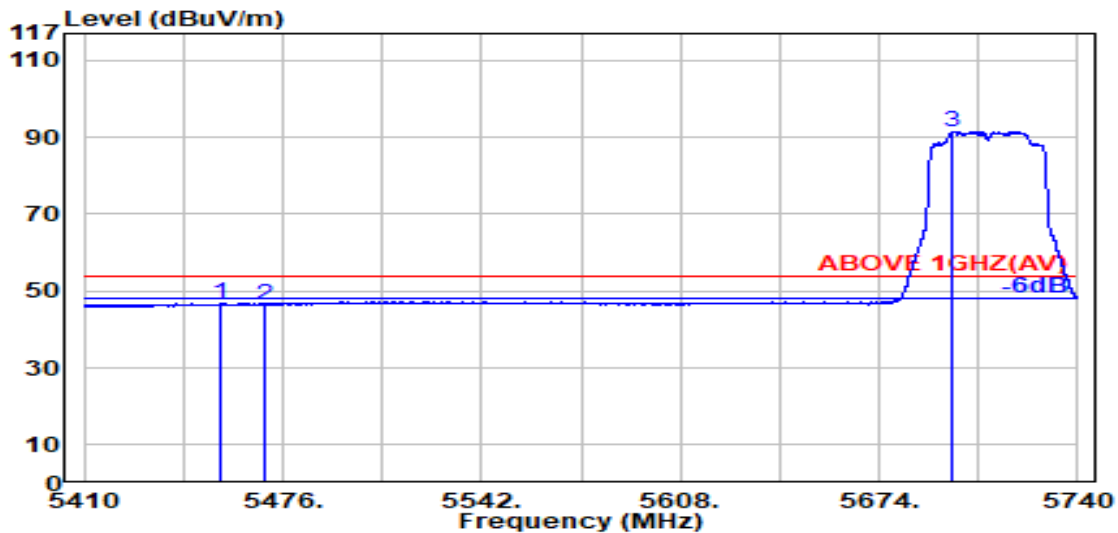


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.700	34.01	8.67	39.16	43.35	46.88	54.00	7.12	Average
5470.000	34.04	8.69	39.15	42.90	46.47	54.00	7.53	Average
@ 5697.900	33.61	8.90	39.19	88.21	91.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

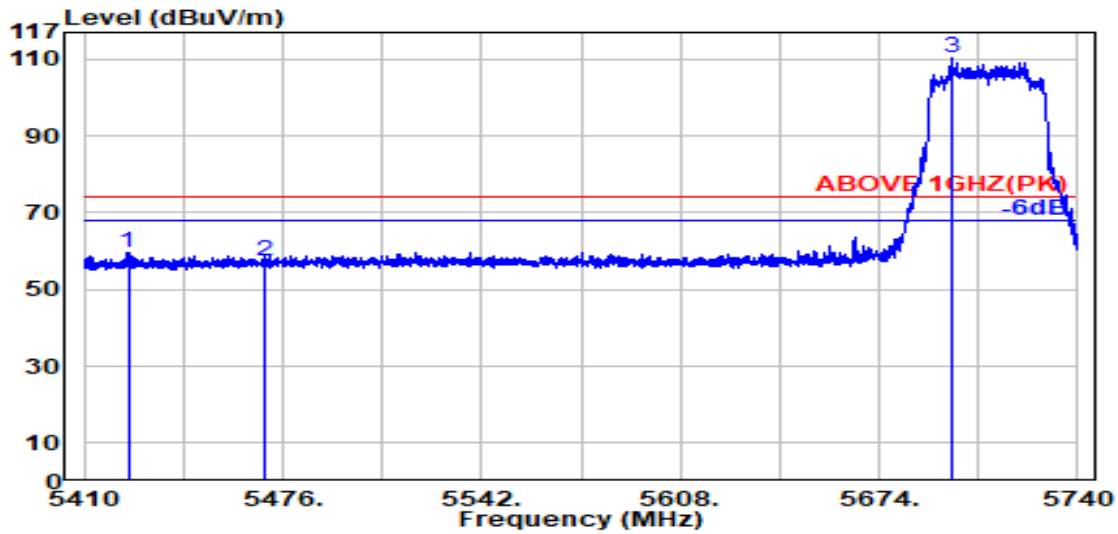

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.600	33.95	8.64	39.16	56.35	59.78	74.00	14.22	Peak
5470.000	34.04	8.69	39.15	53.67	57.25	74.00	16.75	Peak
@ 5697.900	33.61	8.90	39.19	107.09	110.41	---	---	Peak

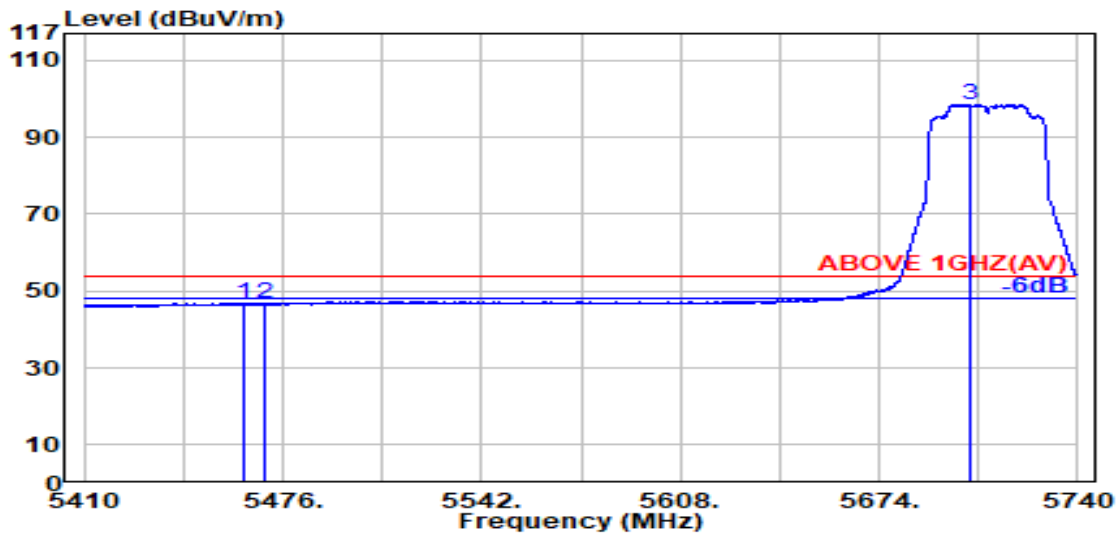


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.03	8.68	39.15	43.26	46.81	54.00	7.19	Average
5470.000	34.04	8.69	39.15	43.06	46.63	54.00	7.37	Average
@ 5704.000	33.60	8.91	39.19	95.21	98.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

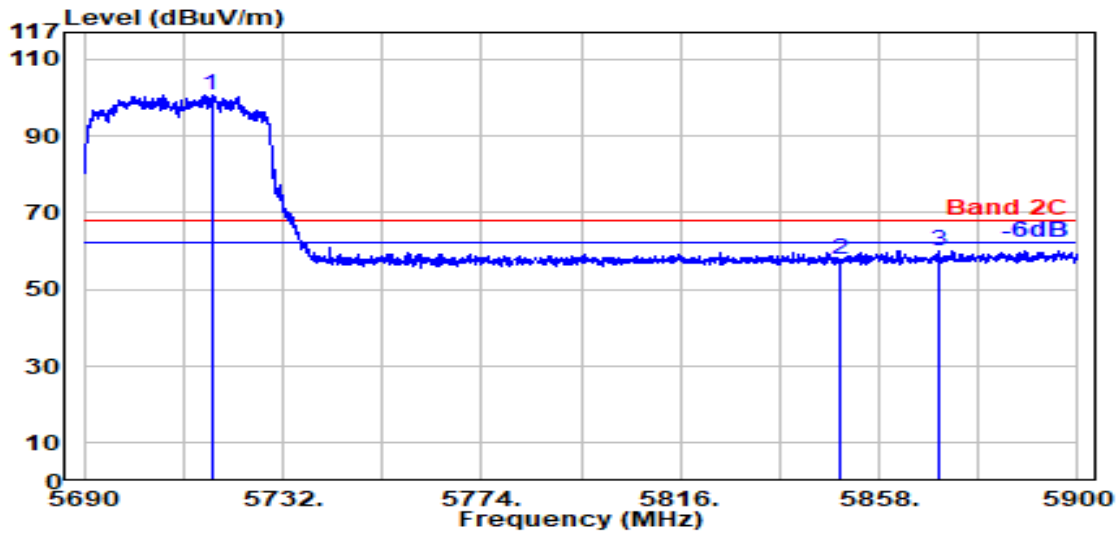

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.900	33.60	8.92	39.19	97.48	100.81	---	---	Peak
5850.000	33.90	9.04	39.22	54.24	57.96	68.20	10.24	Peak
5870.400	33.98	9.06	39.22	56.45	60.26	68.20	7.94	Peak

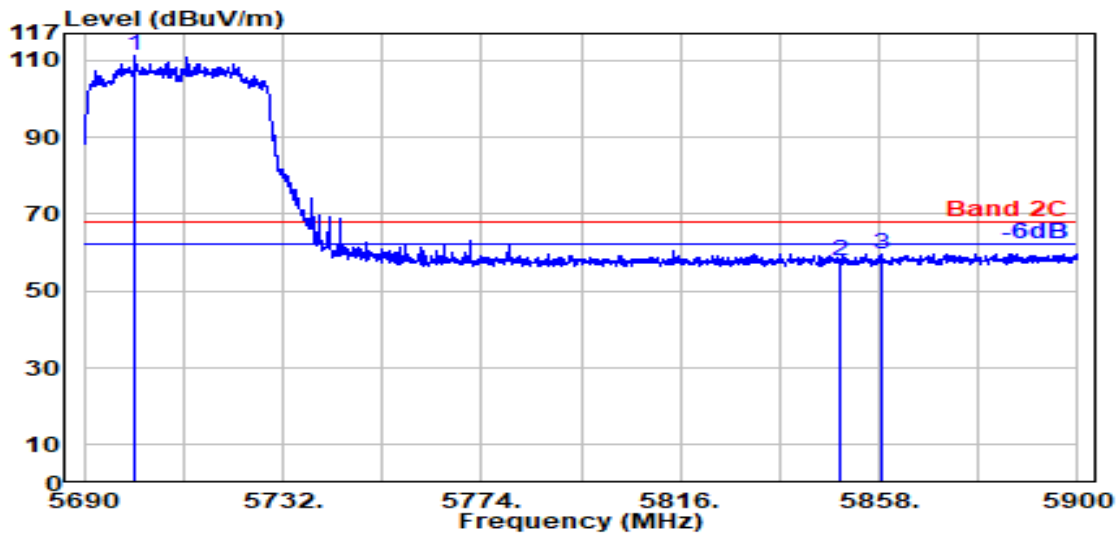


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.800	33.60	8.90	39.19	108.14	111.45	---	---	Peak
5850.000	33.90	9.04	39.22	54.05	57.77	68.20	10.43	Peak
5858.300	33.93	9.05	39.22	55.94	59.70	68.20	8.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

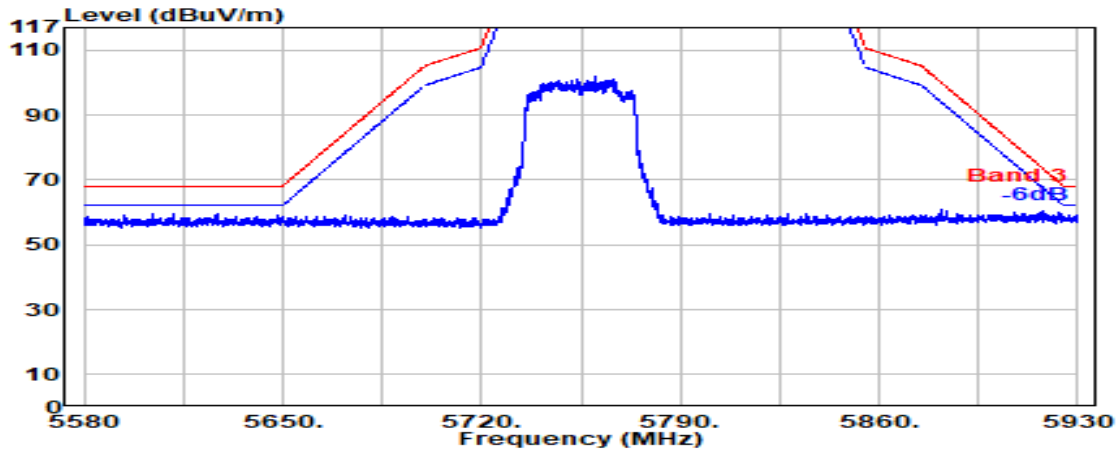


Antenna at Vertical Polarization

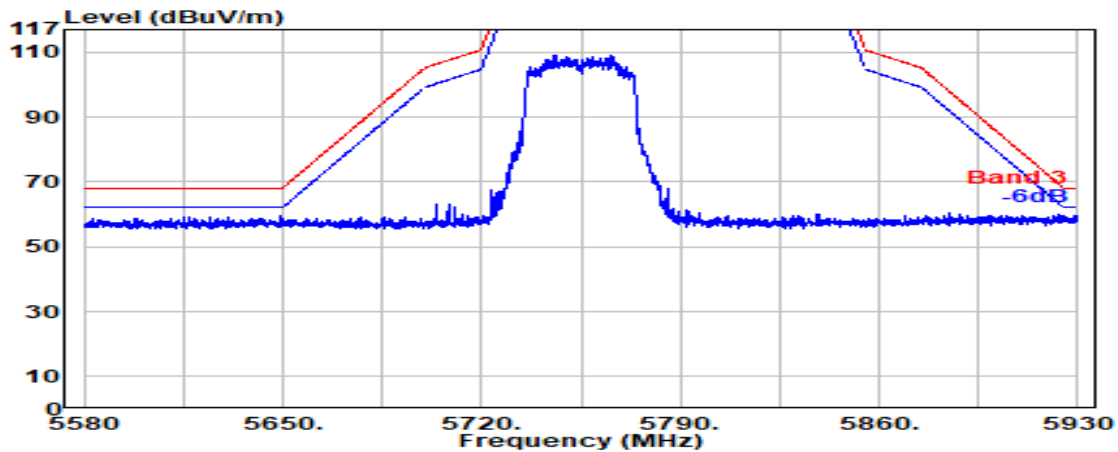


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

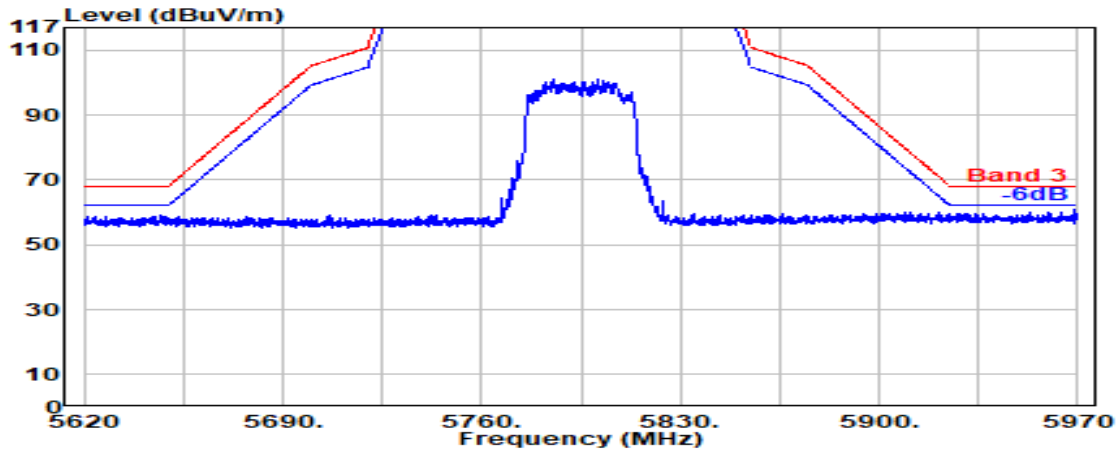

Antenna at Vertical Polarization

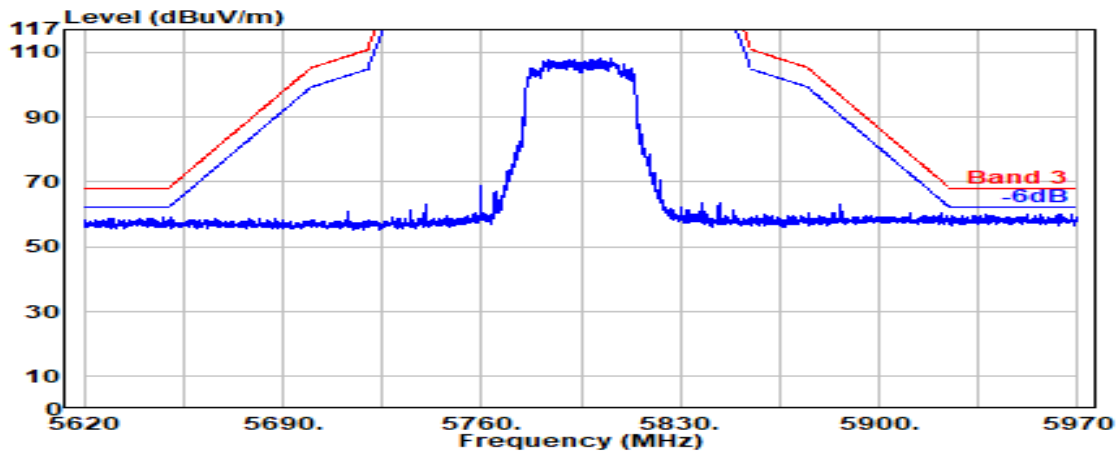


Mode	802.11ax-HE40	U-NII Band	4
		Frequency	TX 5875MHz

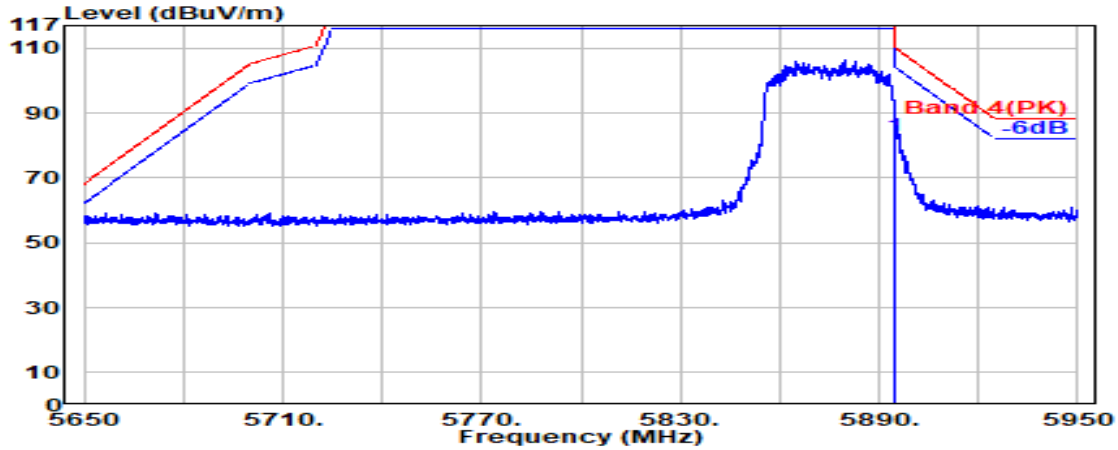

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	78.89	82.82	110.20	27.38	Peak

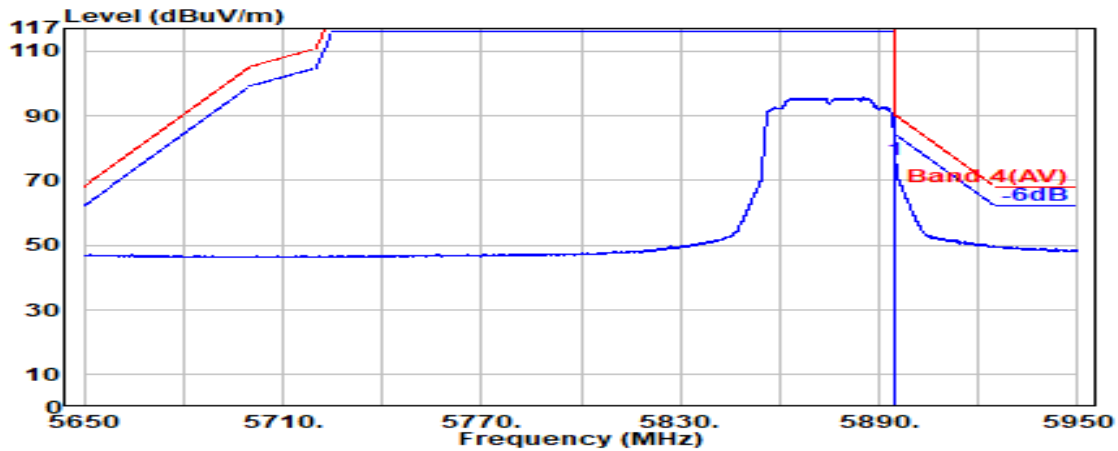


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	72.41	76.33	90.20	13.87	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE40	U-NII Band	4
		Frequency	TX 5875MHz

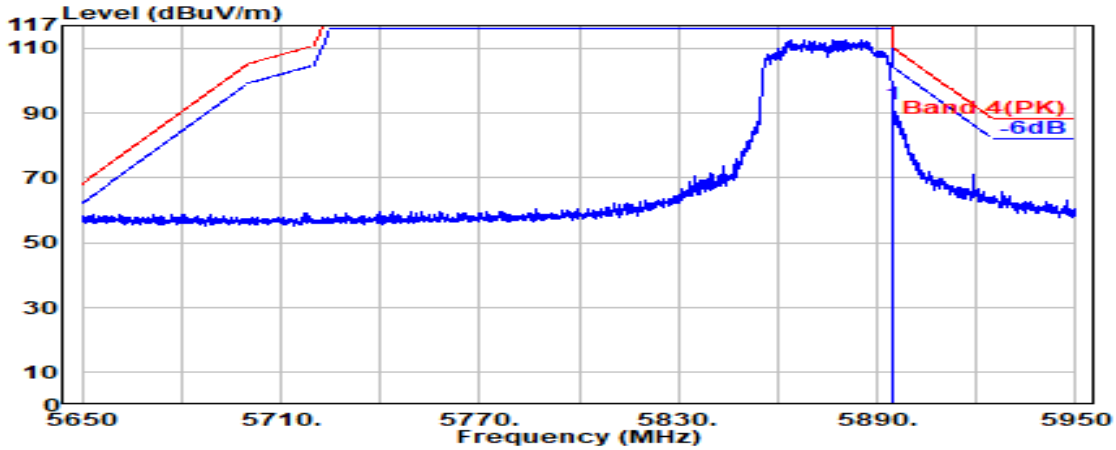

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	88.99	92.92	110.20	17.28	Peak

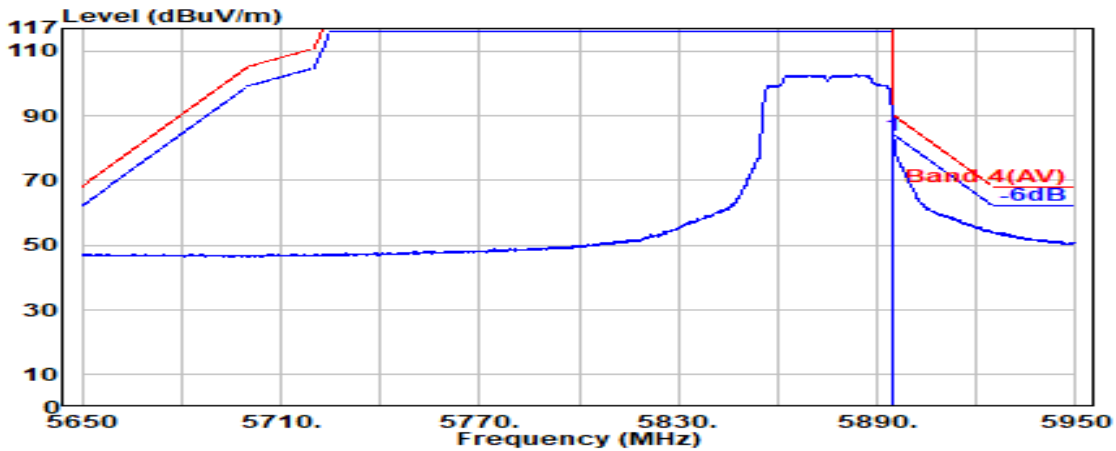


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	80.00	83.93	90.20	6.27	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

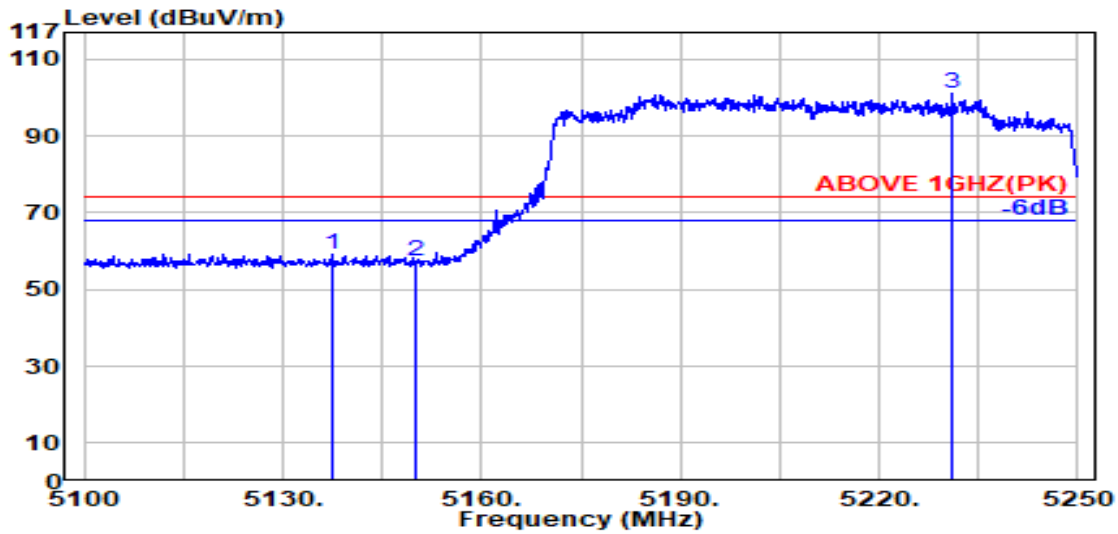

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.400	33.47	8.36	39.19	56.73	59.37	74.00	14.63	Peak
5150.000	33.50	8.37	39.19	54.69	57.37	74.00	16.63	Peak
@ 5231.000	33.74	8.46	39.18	98.05	101.06	---	---	Peak

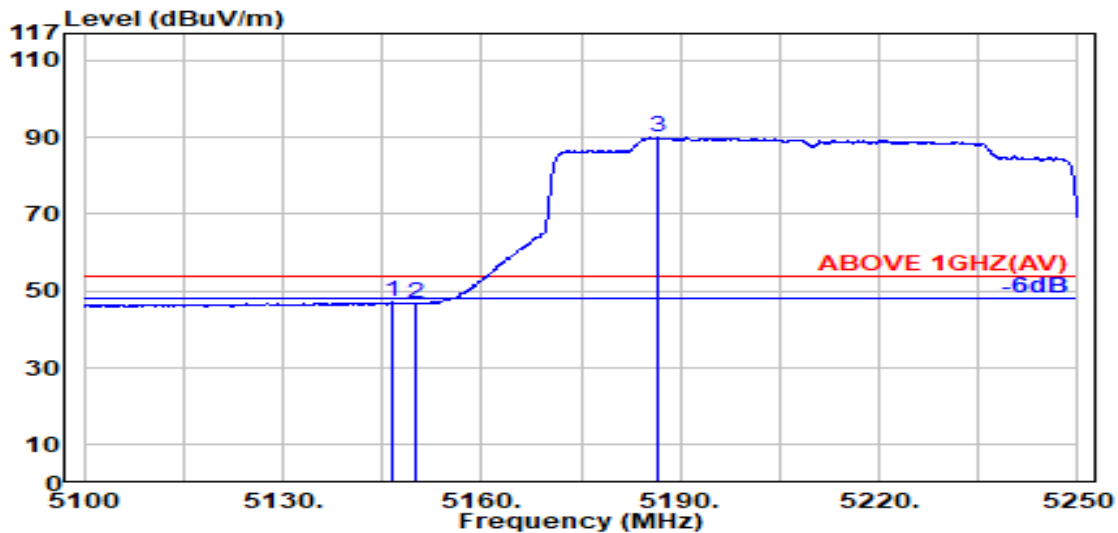


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	33.49	8.37	39.19	44.43	47.10	54.00	6.90	Average
5150.000	33.50	8.37	39.19	44.11	46.79	54.00	7.21	Average
@ 5186.700	33.72	8.41	39.19	87.03	89.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

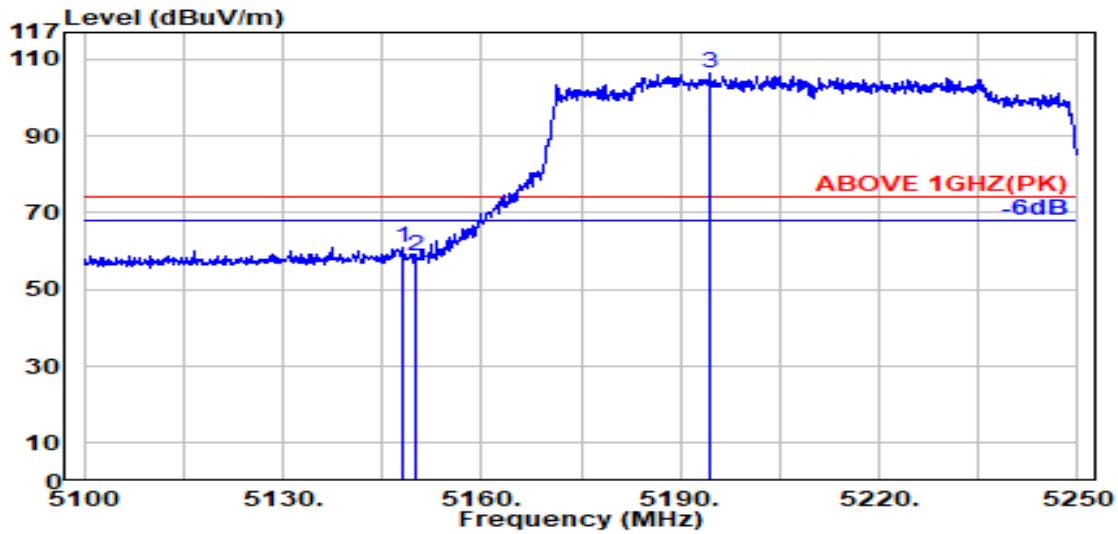

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	33.50	8.37	39.19	58.32	61.00	74.00	13.00	Peak
5150.000	33.50	8.37	39.19	56.07	58.75	74.00	15.25	Peak
@ 5194.500	33.77	8.42	39.19	103.57	106.57	---	---	Peak

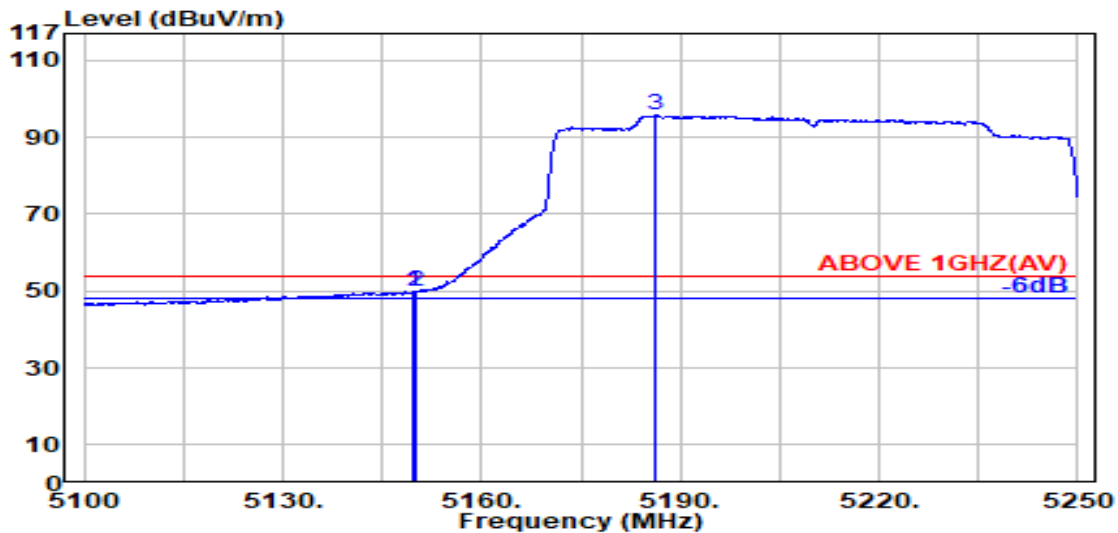


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	47.20	49.88	54.00	4.12	Average
5150.000	33.50	8.37	39.19	47.38	50.06	54.00	3.94	Average
@ 5186.200	33.72	8.41	39.19	92.79	95.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

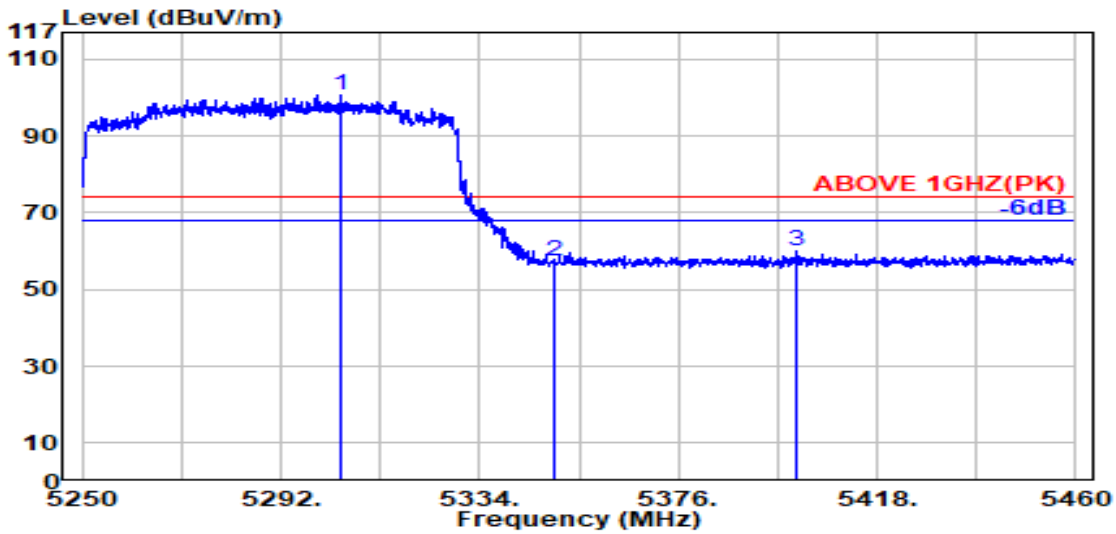

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.800	33.79	8.53	39.17	97.35	100.49	---	---	Peak
5350.000	33.70	8.57	39.17	54.14	57.25	74.00	16.75	Peak
5401.000	33.90	8.62	39.16	56.60	59.97	74.00	14.03	Peak

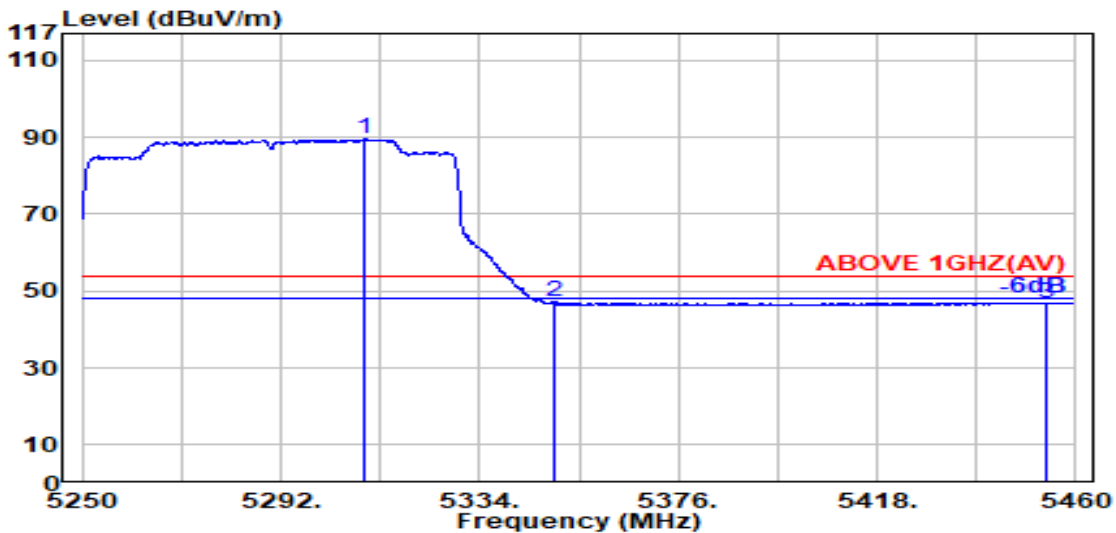


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.400	33.78	8.53	39.17	86.31	89.45	---	---	Average
5350.000	33.70	8.57	39.17	43.96	47.06	54.00	6.94	Average
5453.800	34.01	8.67	39.16	43.49	47.02	54.00	6.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

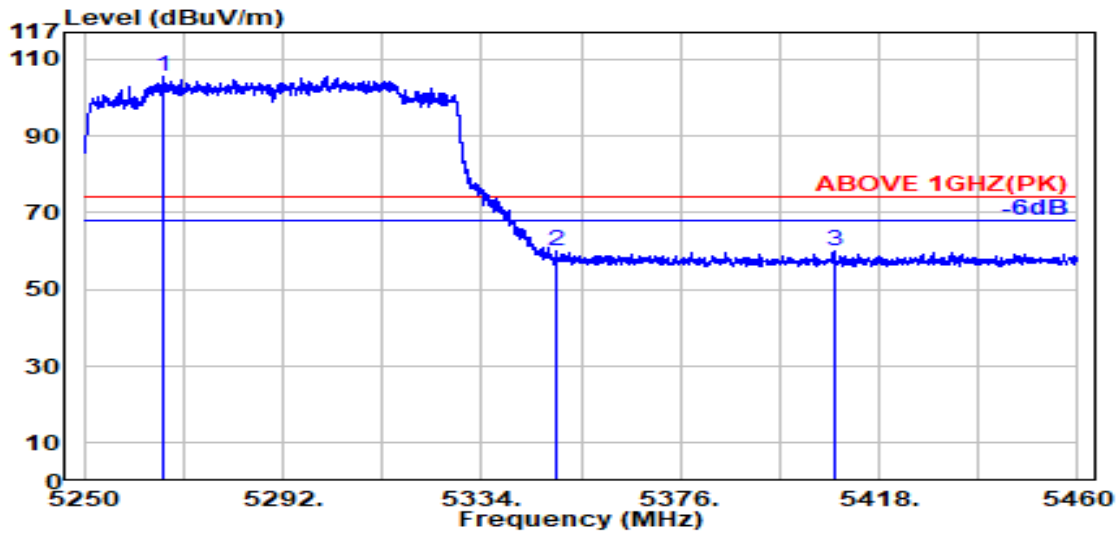

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.700	33.73	8.49	39.18	102.57	105.62	---	---	Peak
5350.000	33.70	8.57	39.17	56.86	59.97	74.00	14.03	Peak
5408.400	33.92	8.63	39.16	56.47	59.86	74.00	14.14	Peak

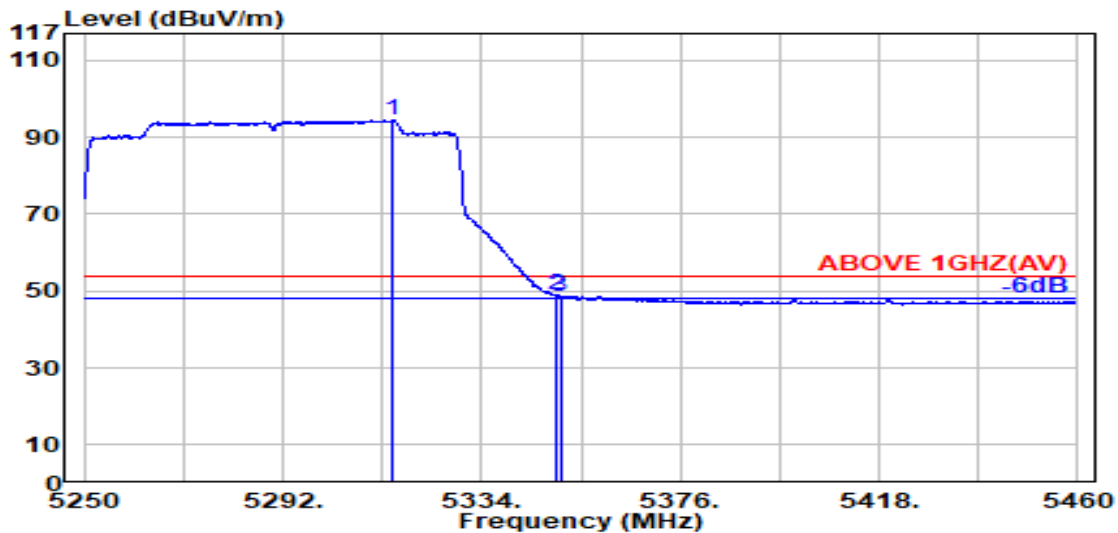


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.000	33.77	8.54	39.17	91.25	94.39	---	---	Average
5350.000	33.70	8.57	39.17	45.87	48.98	54.00	5.02	Average
5350.600	33.70	8.57	39.17	45.49	48.60	54.00	5.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

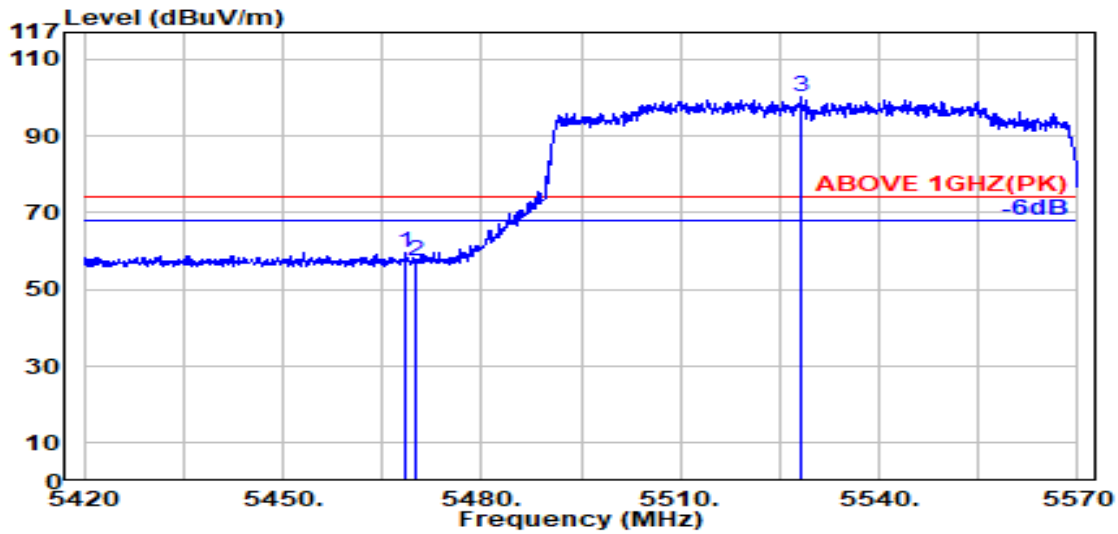

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	56.09	59.66	74.00	14.34	Peak
5470.000	34.04	8.69	39.15	53.63	57.21	74.00	16.79	Peak
@ 5528.400	34.04	8.74	39.16	96.38	100.01	---	---	Peak

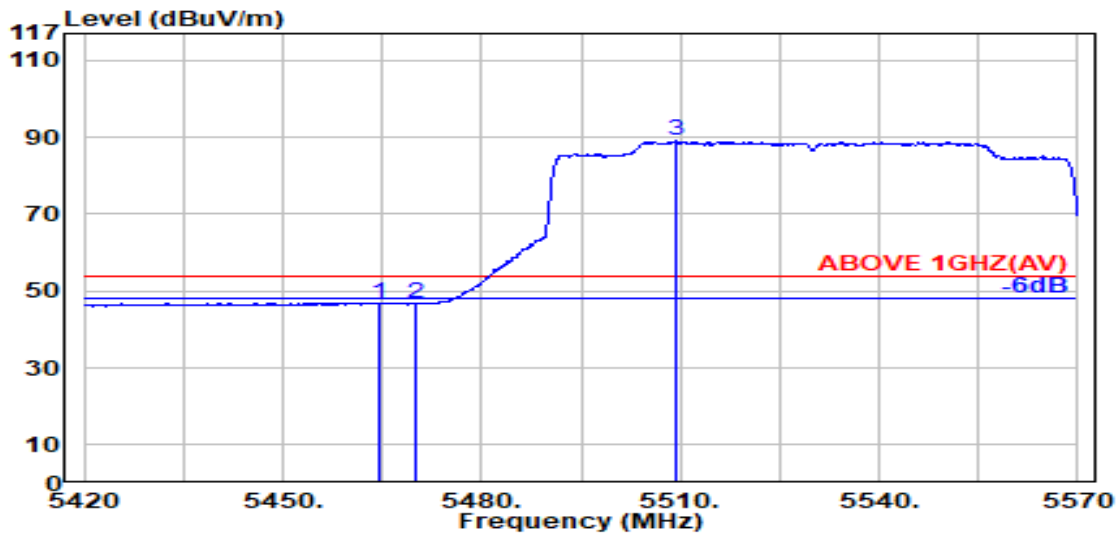


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.03	8.68	39.15	43.39	46.95	54.00	7.05	Average
5470.000	34.04	8.69	39.15	43.17	46.74	54.00	7.26	Average
@ 5509.300	34.08	8.73	39.15	85.67	89.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

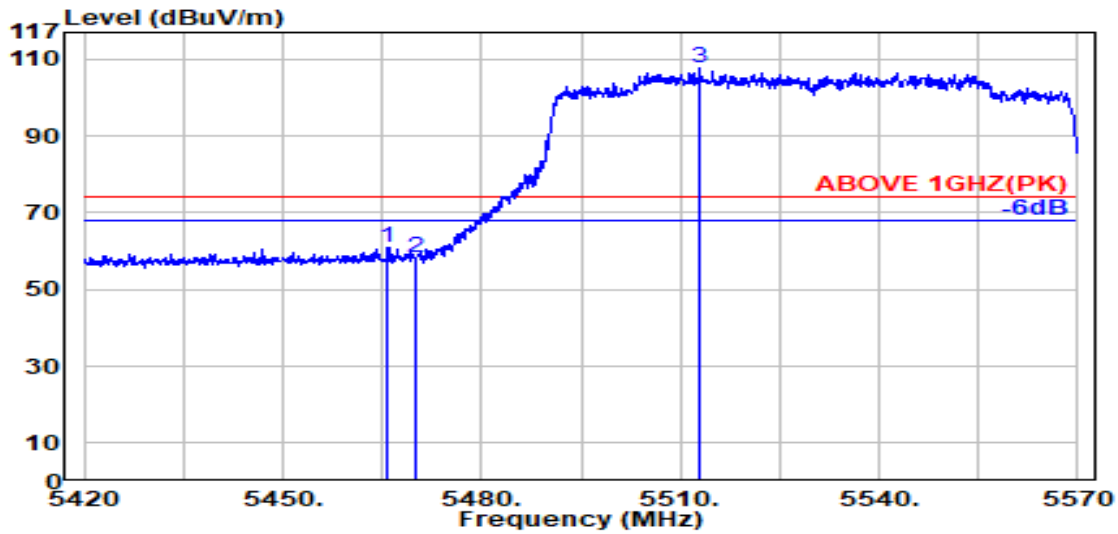

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.03	8.68	39.15	57.36	60.92	74.00	13.08	Peak
5470.000	34.04	8.69	39.15	54.92	58.49	74.00	15.51	Peak
@ 5512.800	34.07	8.73	39.15	104.22	107.87	---	---	Peak

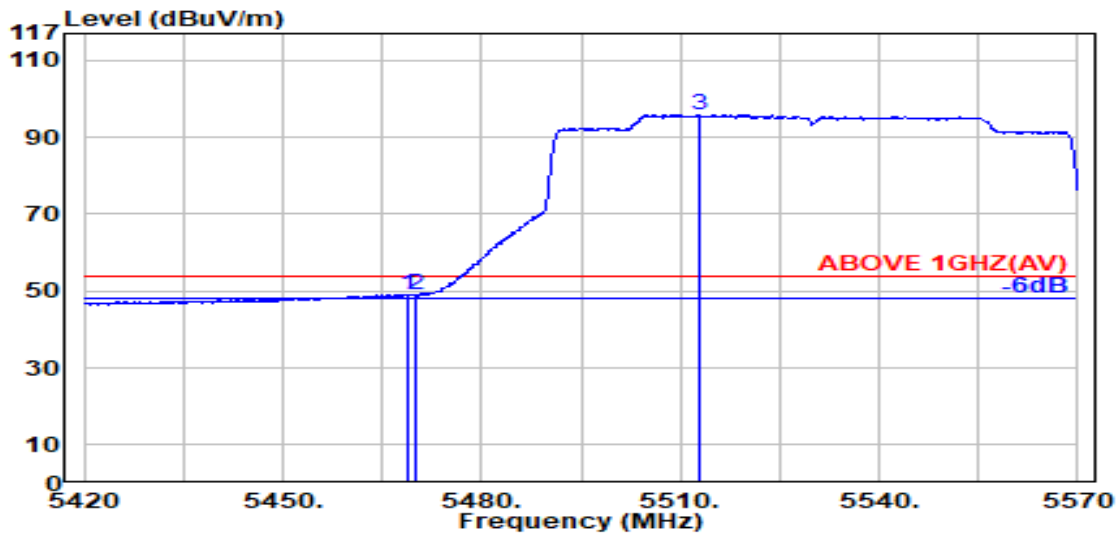


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	45.52	49.09	54.00	4.91	Average
5470.000	34.04	8.69	39.15	45.29	48.86	54.00	5.14	Average
@ 5512.800	34.07	8.73	39.15	92.16	95.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

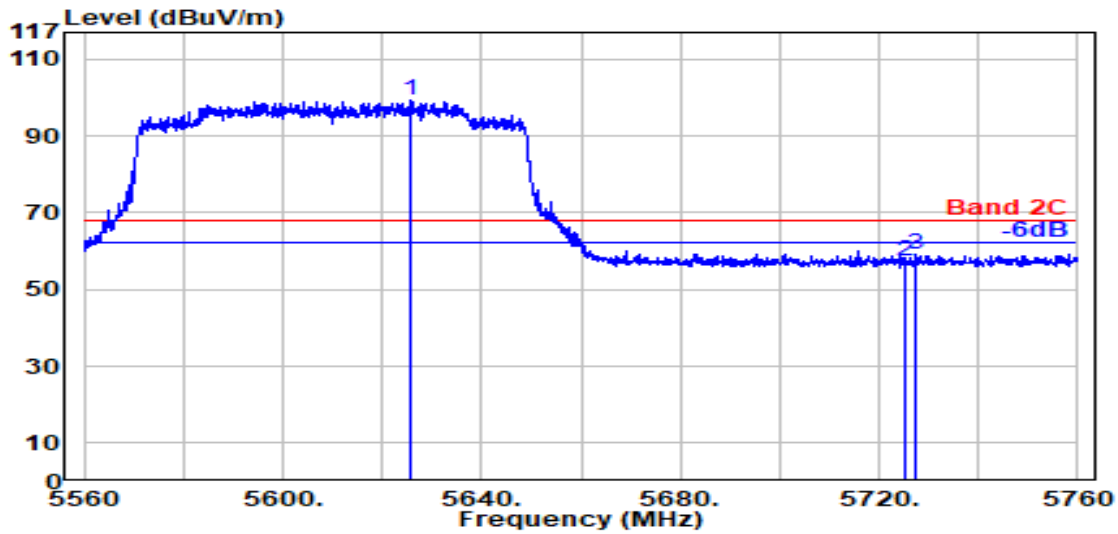

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5625.700	33.80	8.83	39.18	96.02	99.48	---	---	Peak
5725.000	33.60	8.93	39.20	54.09	57.42	68.20	10.78	Peak
5727.300	33.60	8.93	39.20	55.68	59.01	68.20	9.19	Peak

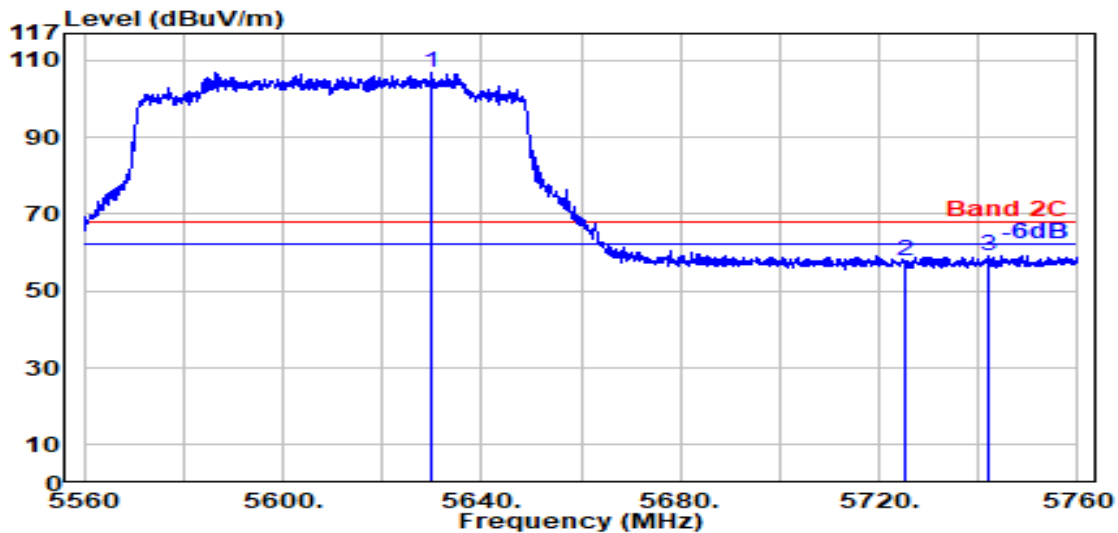


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5629.800	33.80	8.84	39.18	103.56	107.02	---	---	Peak
5725.000	33.60	8.93	39.20	54.58	57.91	68.20	10.29	Peak
5742.200	33.60	8.94	39.20	55.98	59.32	68.20	8.88	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

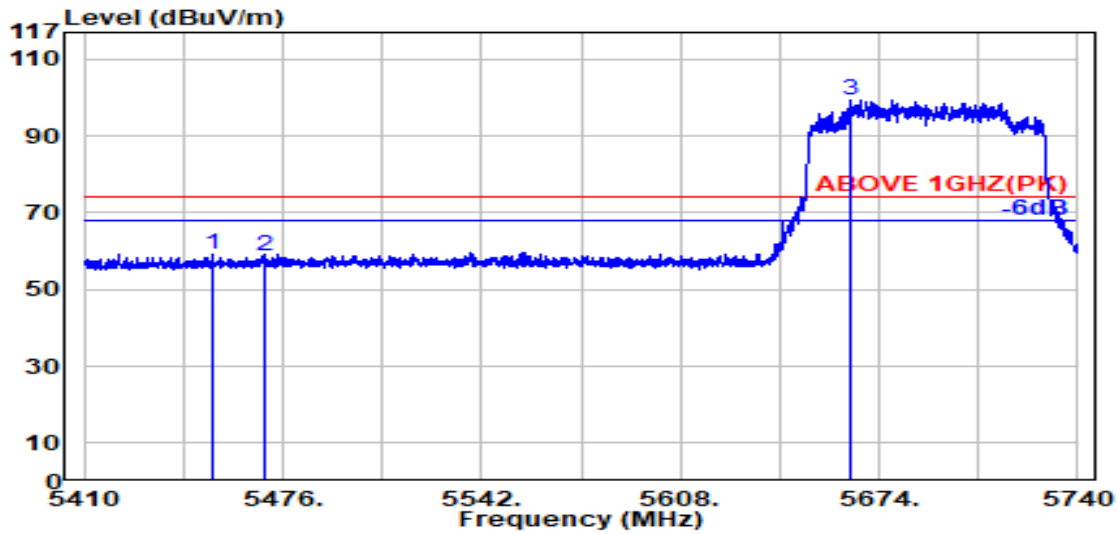

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.700	34.01	8.67	39.16	55.61	59.14	74.00	14.86	Peak
5470.000	34.04	8.69	39.15	55.03	58.60	74.00	15.40	Peak
@ 5664.400	33.74	8.87	39.18	96.10	99.53	---	---	Peak

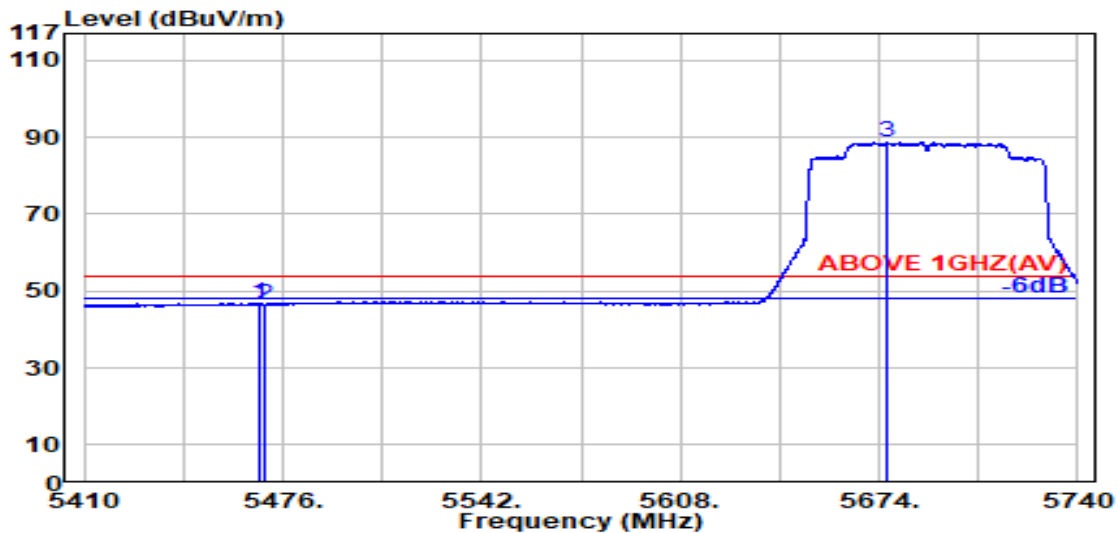


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	43.34	46.91	54.00	7.09	Average
5470.000	34.04	8.69	39.15	43.00	46.57	54.00	7.43	Average
@ 5676.900	33.69	8.88	39.19	85.29	88.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

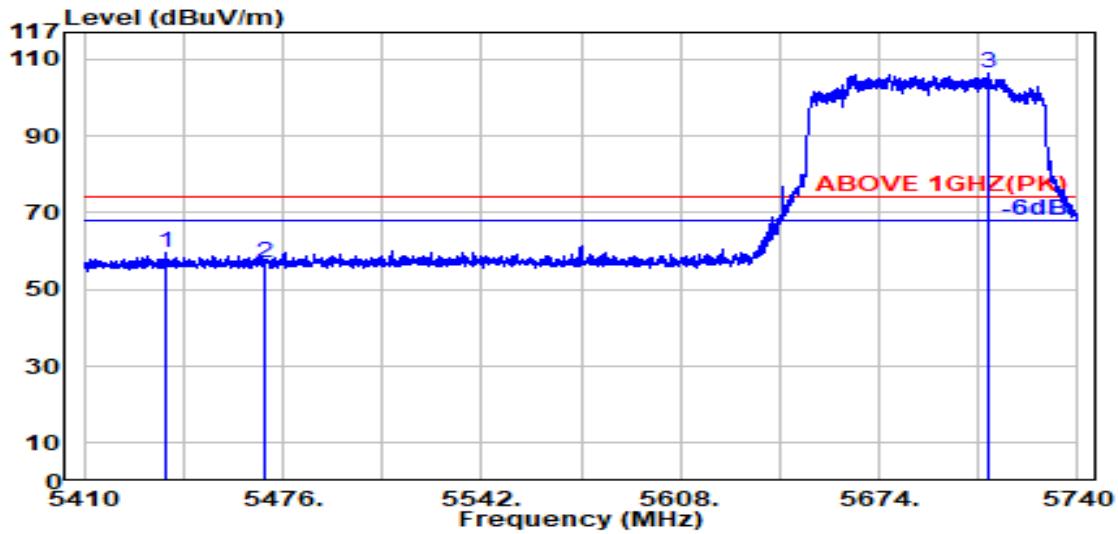

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.200	33.97	8.66	39.16	56.31	59.78	74.00	14.22	Peak
5470.000	34.04	8.69	39.15	53.57	57.14	74.00	16.86	Peak
@ 5710.000	33.60	8.91	39.19	103.21	106.53	---	---	Peak

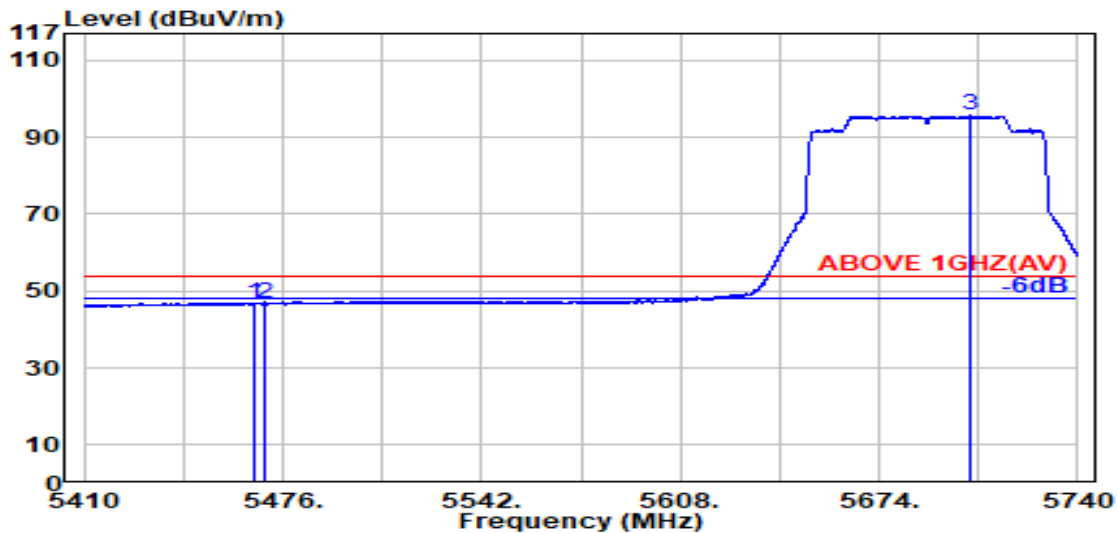


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.03	8.68	39.15	43.36	46.92	54.00	7.08	Average
5470.000	34.04	8.69	39.15	43.39	46.97	54.00	7.03	Average
@ 5704.400	33.60	8.91	39.19	92.28	95.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

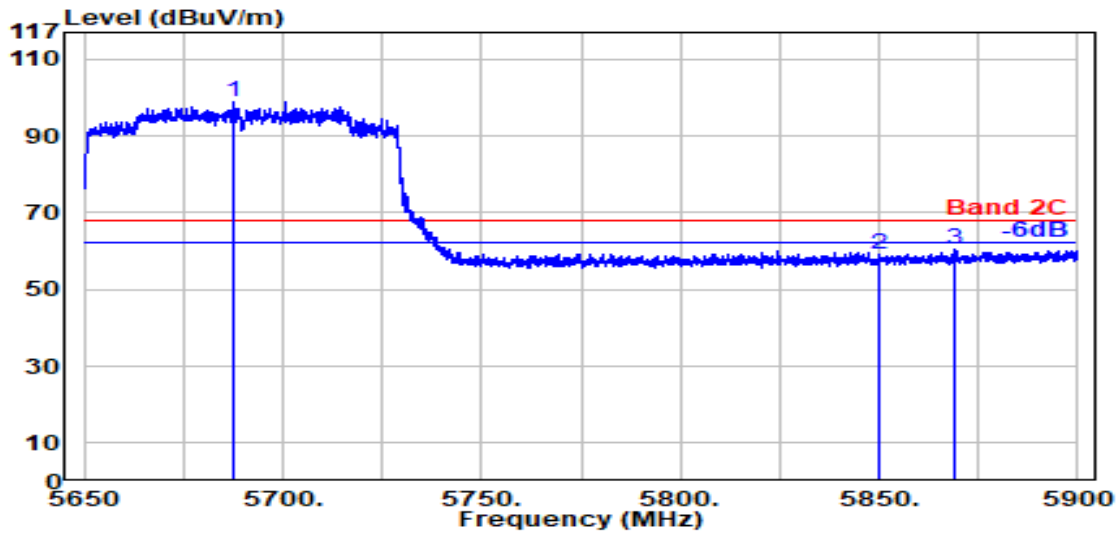

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5687.714	33.65	8.89	39.19	95.50	98.85	---	---	Peak
5850.000	33.90	9.04	39.22	55.22	58.94	68.20	9.26	Peak
5869.286	33.98	9.06	39.22	56.63	60.44	68.20	7.76	Peak

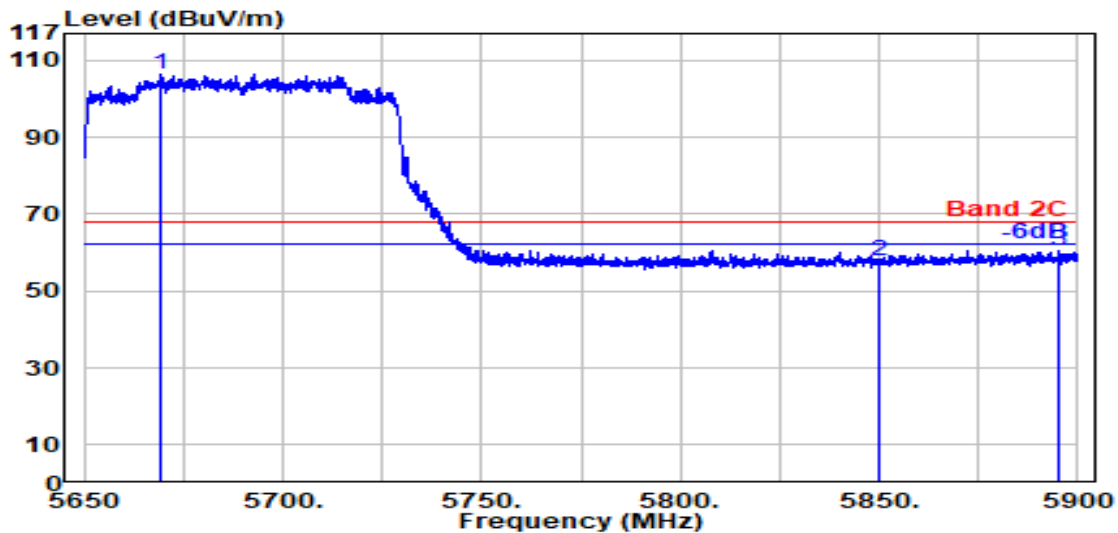


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5669.143	33.72	8.87	39.18	103.17	106.58	---	---	Peak
5850.000	33.90	9.04	39.22	54.33	58.04	68.20	10.16	Peak
5895.286	34.08	9.08	39.23	56.75	60.68	68.20	7.52	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

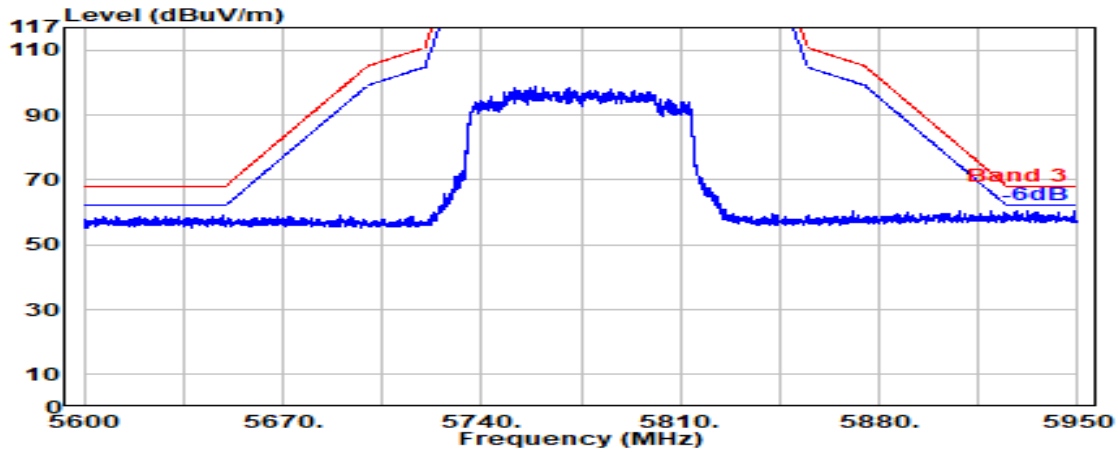

Antenna at Vertical Polarization

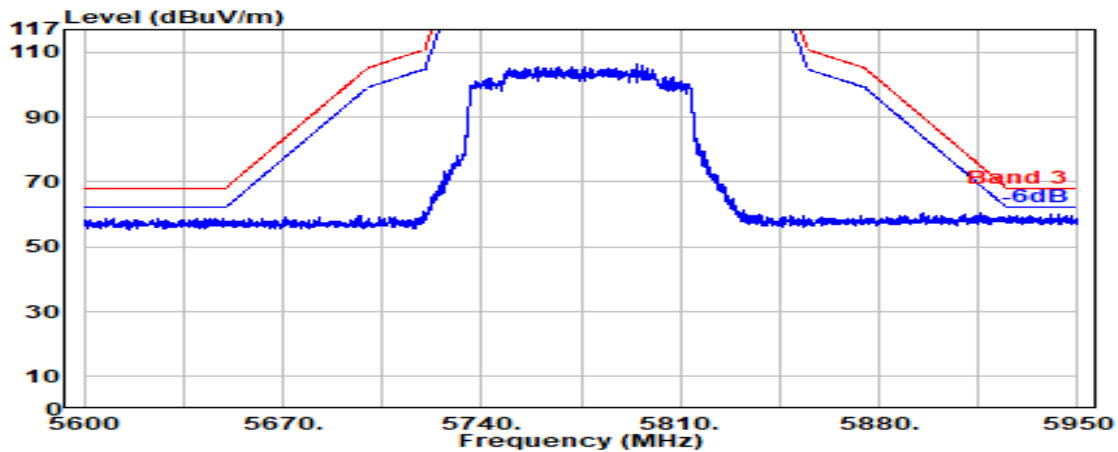


Mode	802.11ax-HE80	U-NII Band	4
		Frequency	TX 5855MHz

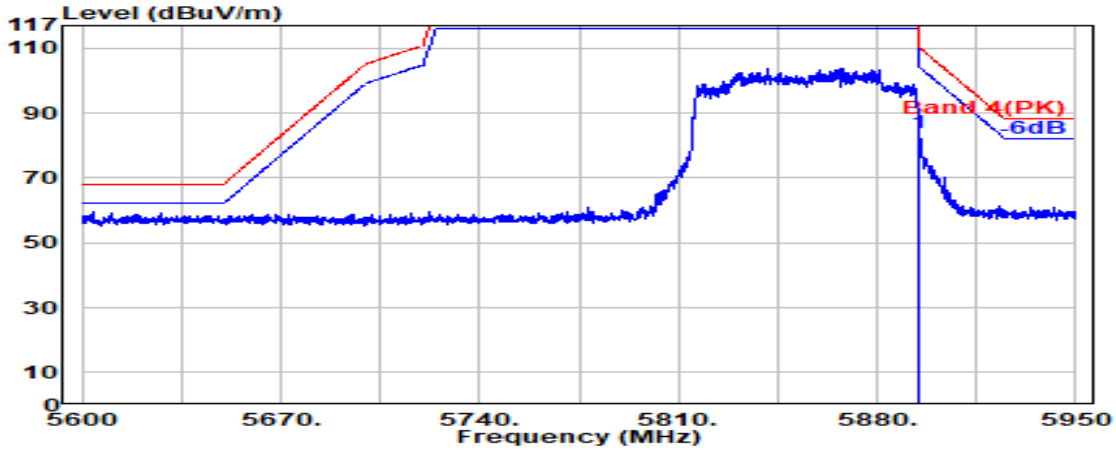

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	79.84	83.77	110.16	26.39	Peak

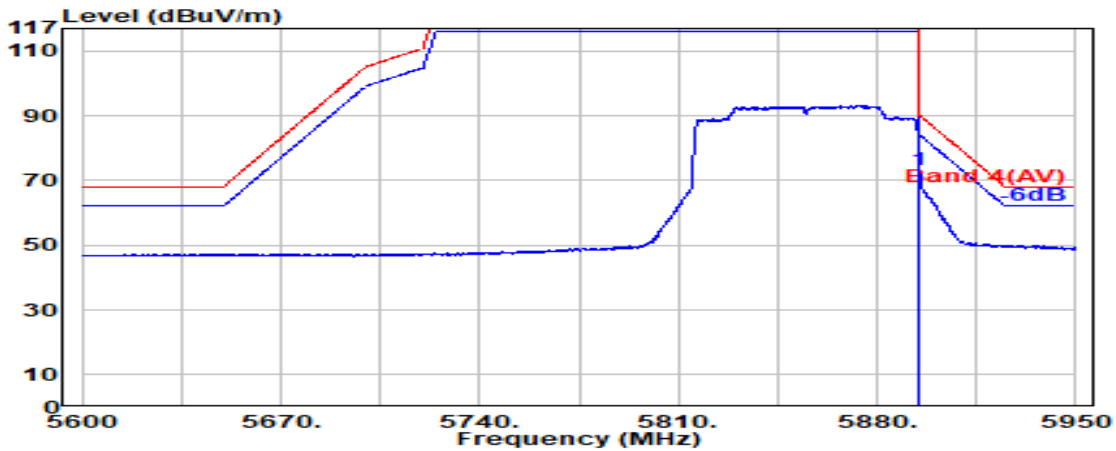


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	69.16	73.09	90.16	17.07	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE80	U-NII Band	4
		Frequency	TX 5855MHz

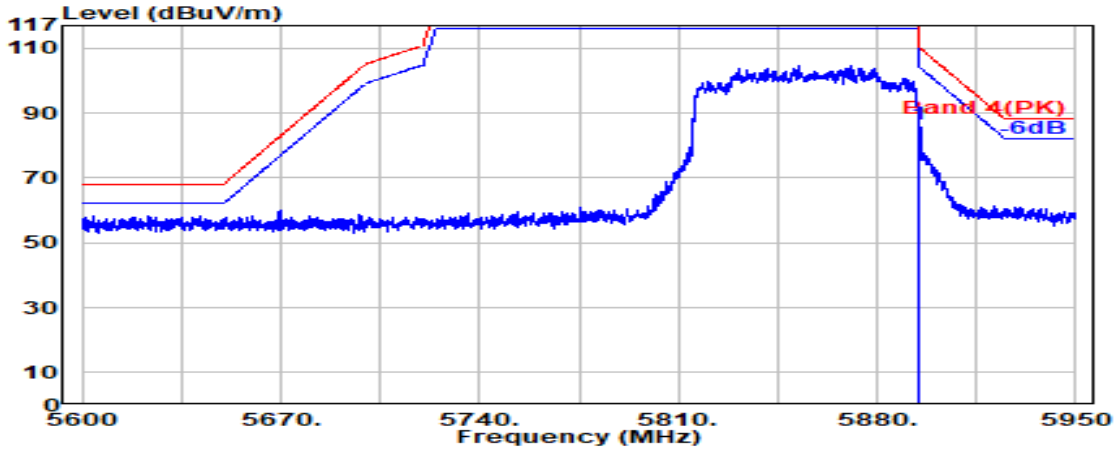

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	82.45	86.38	110.16	23.78	Peak

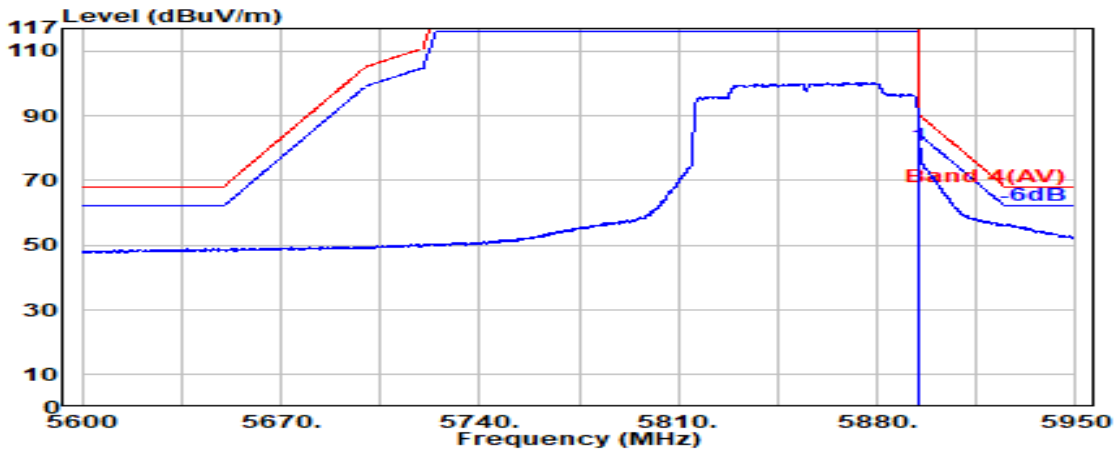


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	76.89	80.82	90.16	9.34	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

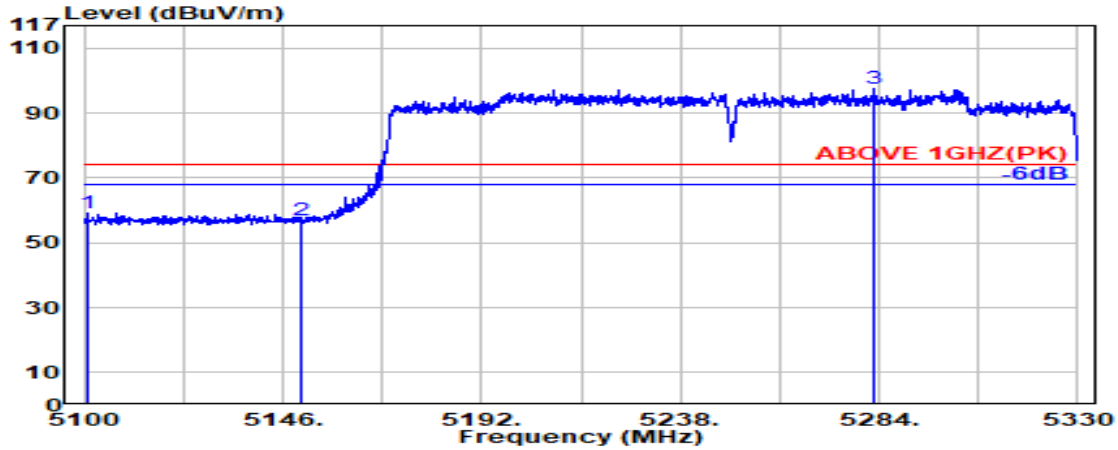

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.900	33.40	8.32	39.20	56.84	59.37	74.00	14.63	Peak
5150.000	33.50	8.37	39.19	54.38	57.06	74.00	16.94	Peak
@ 5282.700	33.77	8.51	39.18	94.45	97.54	--	---	Peak

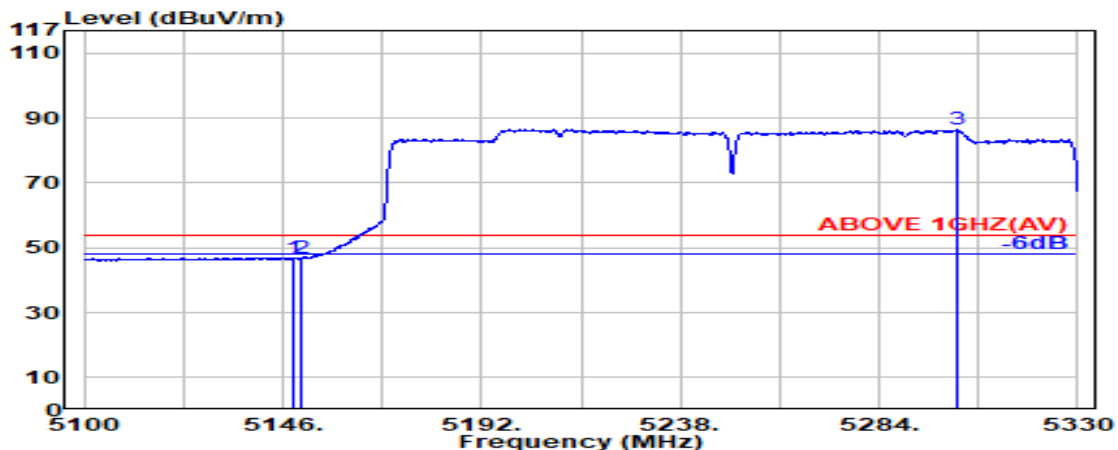


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.50	8.37	39.19	44.25	46.93	54.00	7.07	Peak
5150.000	33.50	8.37	39.19	44.07	46.76	54.00	7.24	Peak
@ 5302.200	33.80	8.53	39.17	83.32	86.46	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

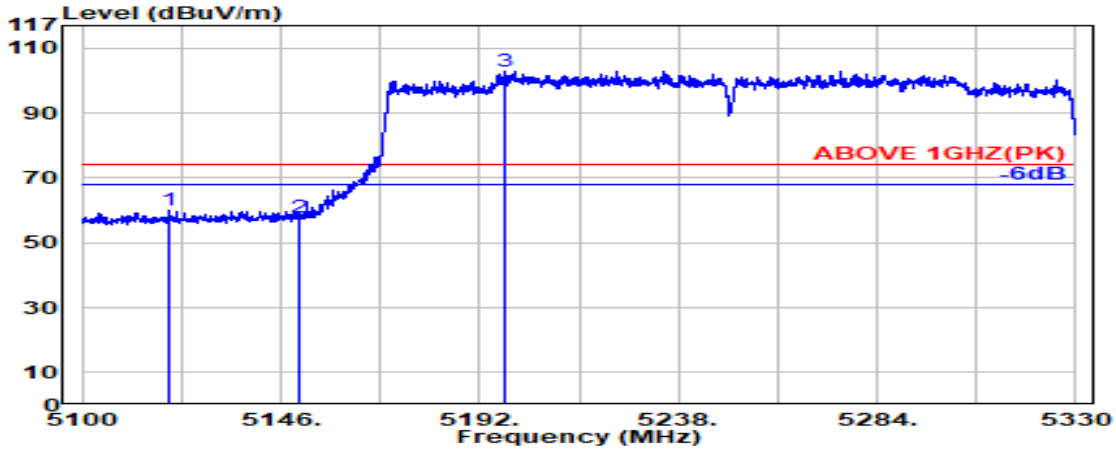

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.000	33.44	8.34	39.20	57.40	59.99	74.00	14.01	Peak
5150.000	33.50	8.37	39.19	55.00	57.69	74.00	16.31	Peak
@ 5197.900	33.79	8.42	39.19	99.86	102.89	---	---	Peak

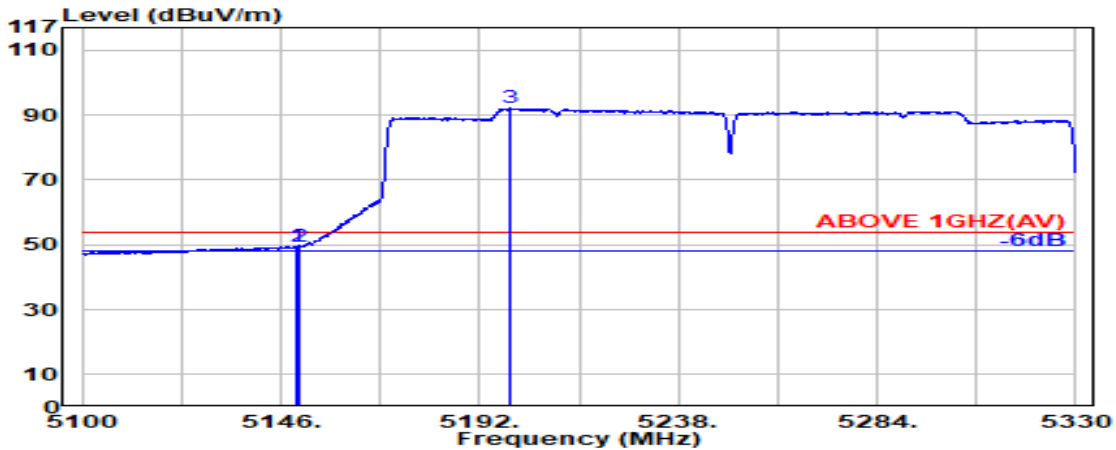


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	46.79	49.47	54.00	4.53	Average
5150.000	33.50	8.37	39.19	46.58	49.27	54.00	4.73	Average
@ 5199.300	33.80	8.42	39.19	89.02	92.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

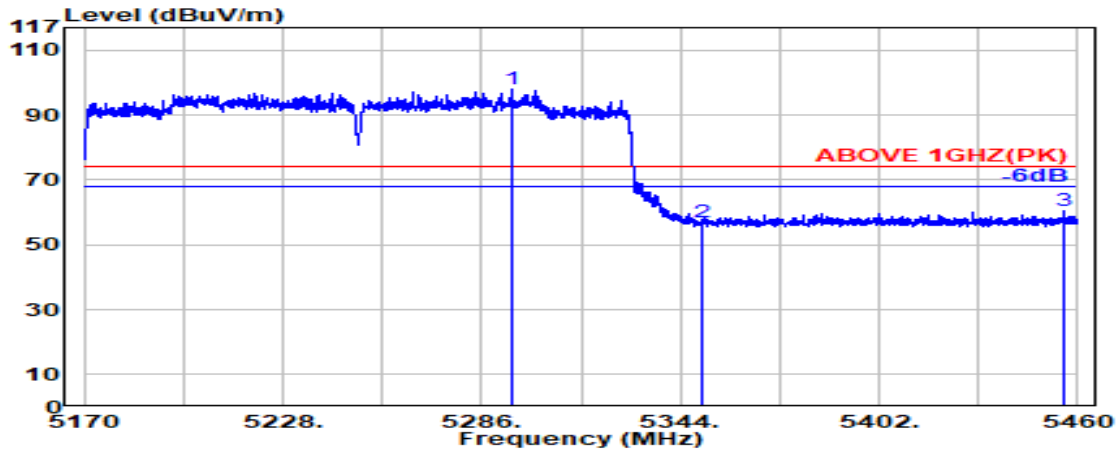

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.700	33.79	8.52	39.17	95.00	98.13	---	---	Peak
5350.000	33.70	8.57	39.17	53.93	57.04	74.00	16.96	Peak
5455.900	34.01	8.67	39.16	57.11	60.64	74.00	13.36	Peak

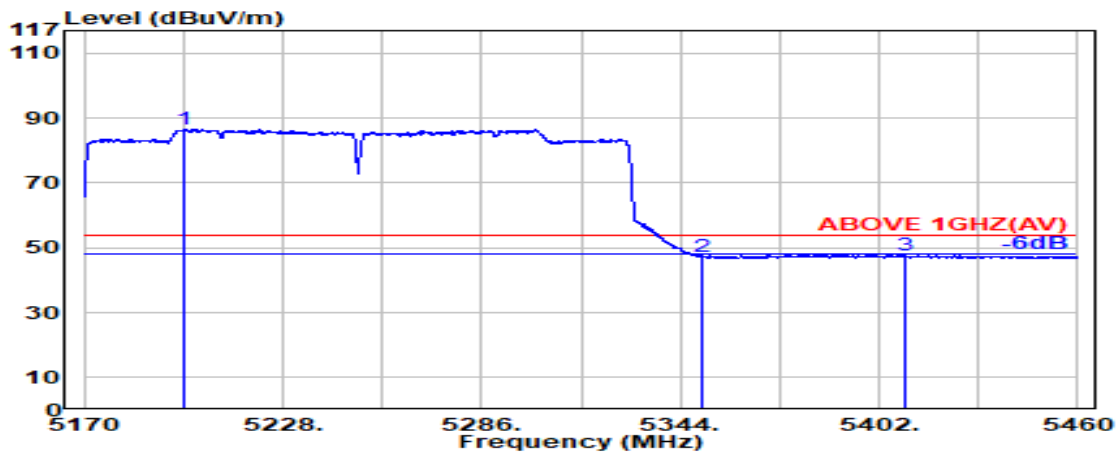


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5199.500	33.80	8.42	39.19	83.63	86.66	---	---	Average
5350.000	33.70	8.57	39.17	44.35	47.45	54.00	6.55	Average
5409.500	33.92	8.63	39.16	44.47	47.86	54.00	6.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

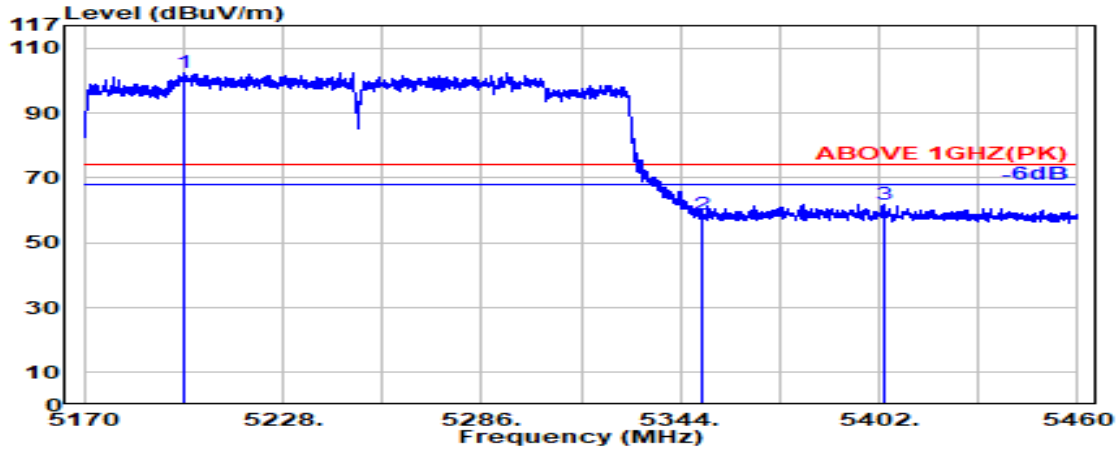

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5198.800	33.79	8.42	39.19	99.57	102.60	---	---	Peak
5350.000	33.70	8.57	39.17	55.58	58.68	74.00	15.32	Peak
5403.400	33.91	8.62	39.16	58.63	62.00	74.00	12.00	Peak

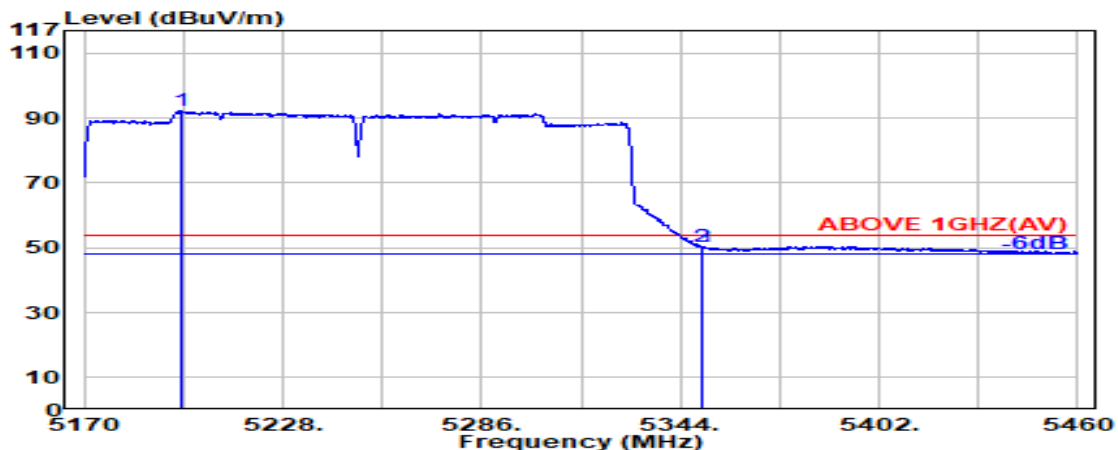


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5198.400	33.79	8.42	39.19	89.13	92.16	---	---	Average
5350.000	33.70	8.57	39.17	47.23	50.34	54.00	3.66	Average
5350.700	33.70	8.57	39.17	47.24	50.34	54.00	3.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

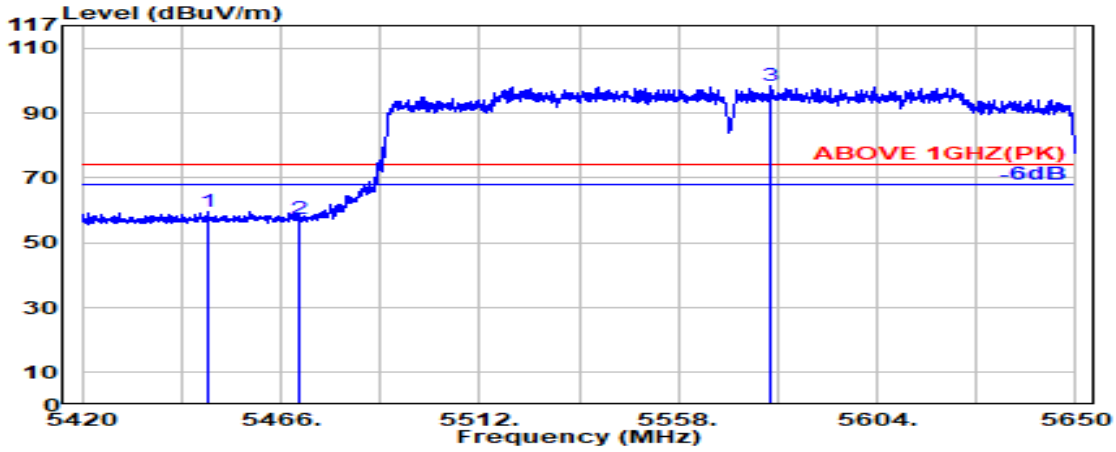

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.200	34.00	8.67	39.16	56.20	59.71	74.00	14.29	Peak
5470.000	34.04	8.69	39.15	53.62	57.19	74.00	16.81	Peak
@ 5579.500	33.88	8.79	39.17	94.85	98.36	---	---	Peak

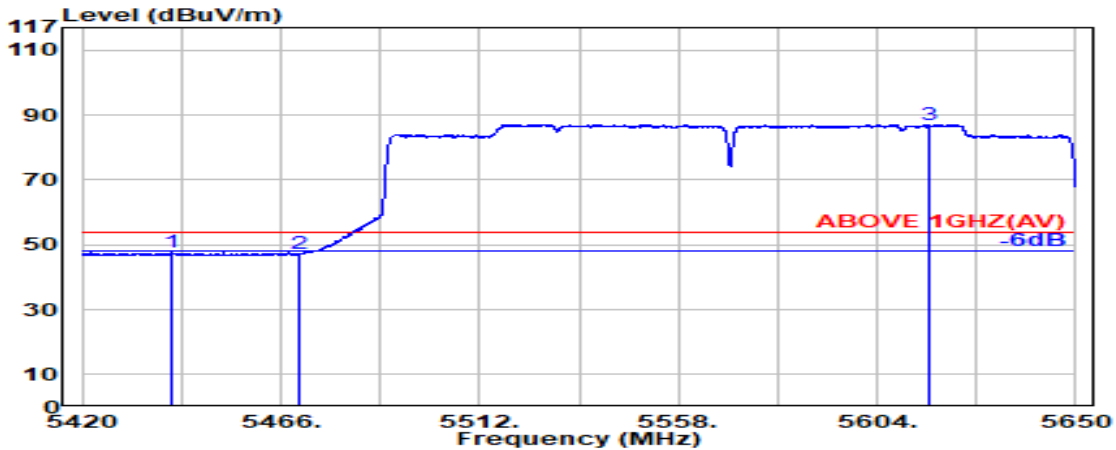


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.900	33.98	8.66	39.16	44.04	47.52	54.00	6.48	Average
5470.000	34.04	8.69	39.15	43.52	47.09	54.00	6.91	Average
@ 5615.900	33.80	8.83	39.17	83.74	87.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

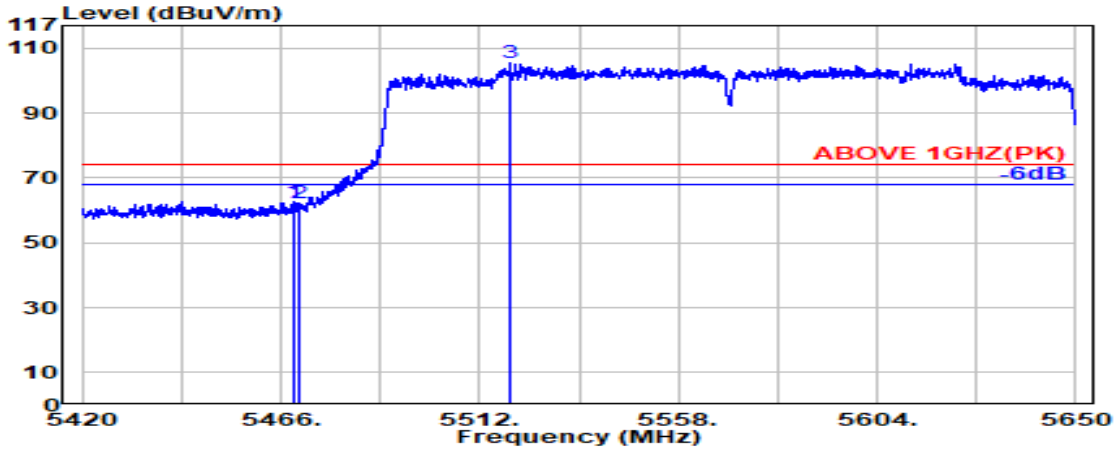

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	59.20	62.77	74.00	11.23	Peak
5470.000	34.04	8.69	39.15	58.88	62.46	74.00	11.54	Peak
@ 5519.200	34.06	8.73	39.15	101.77	105.42	---	---	Peak

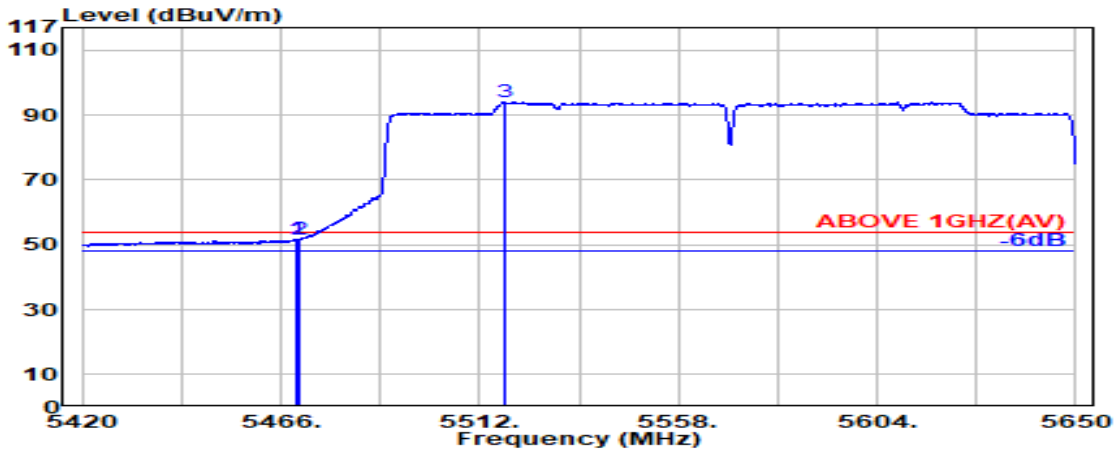


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.04	8.69	39.15	48.26	51.83	54.00	2.17	Average
5470.000	34.04	8.69	39.15	48.11	51.69	54.00	2.31	Average
@ 5517.600	34.06	8.73	39.15	90.52	94.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

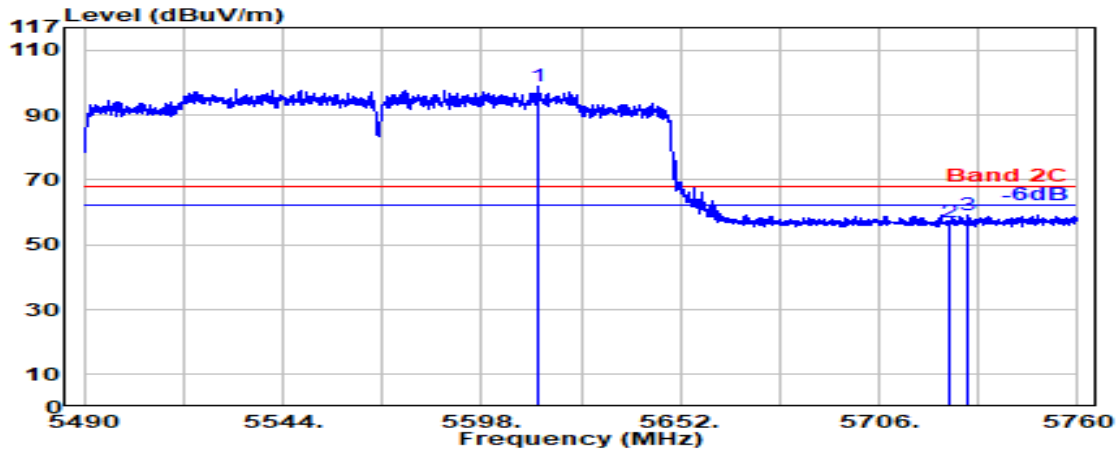

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5613.100	33.80	8.82	39.17	95.43	98.88	---	---	Peak
5725.000	33.60	8.93	39.20	53.46	56.79	68.20	11.41	Peak
5729.900	33.60	8.93	39.20	55.88	59.21	68.20	8.99	Peak

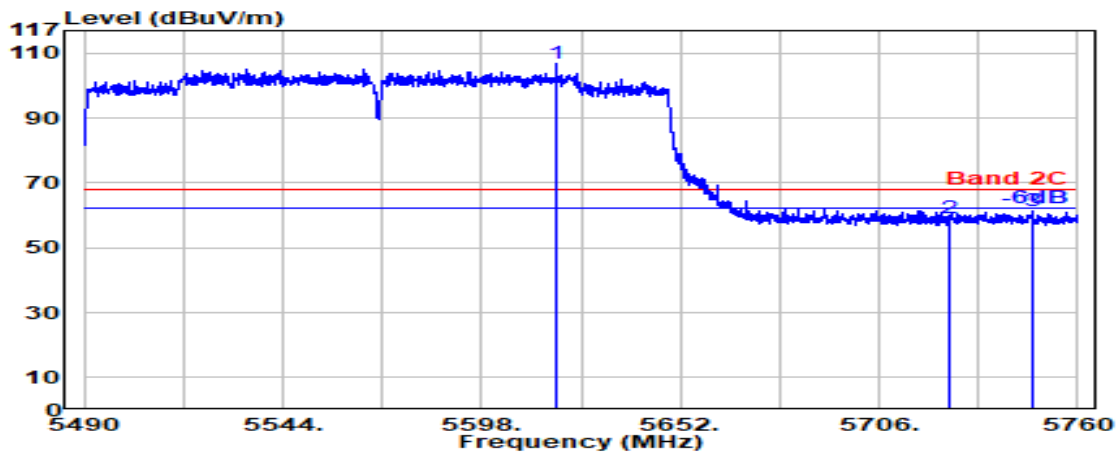


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5618.300	33.80	8.83	39.17	103.32	106.77	---	---	Peak
5725.000	33.60	8.93	39.20	55.74	59.07	68.20	9.13	Peak
5747.600	33.60	8.95	39.20	57.85	61.19	68.20	7.01	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	4
		Frequency	TX 5815MHz

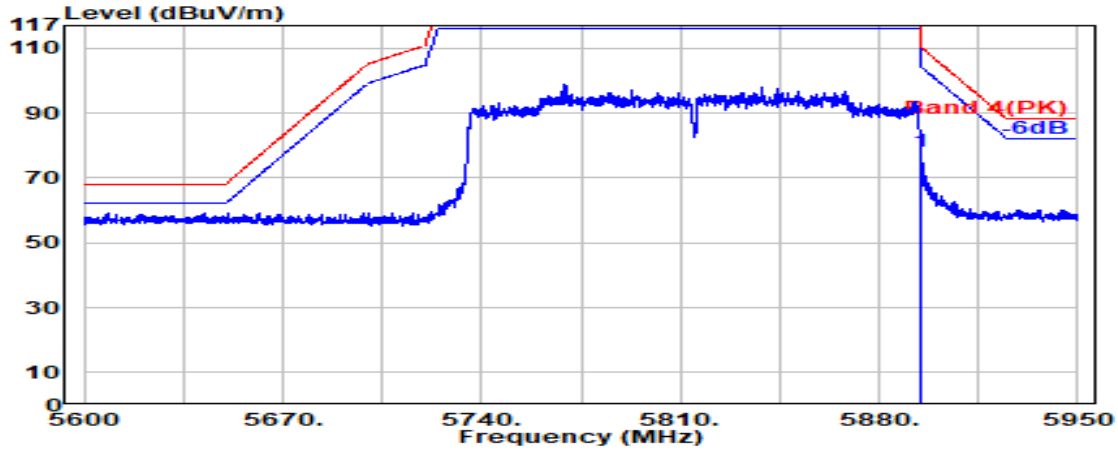

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	74.13	78.06	110.16	32.10	Peak

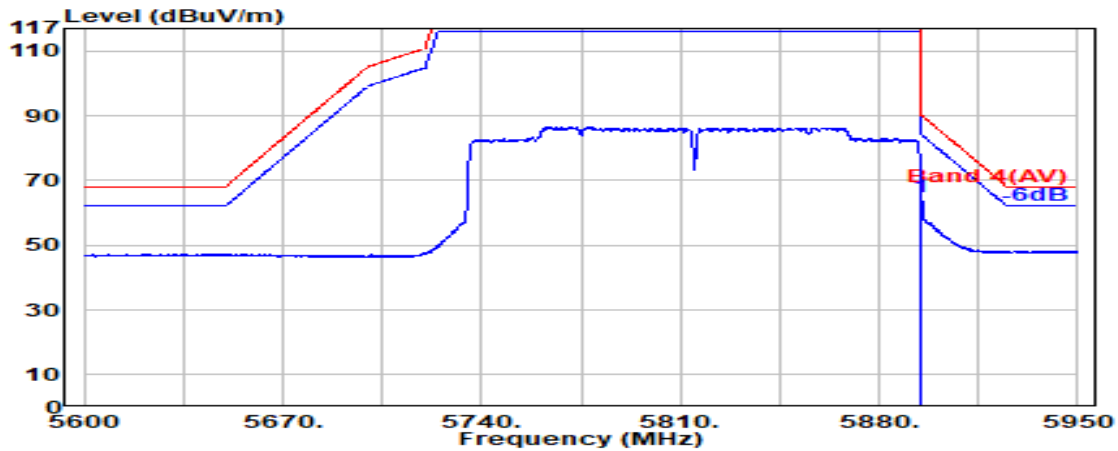


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	61.12	65.05	90.16	25.11	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE160	U-NII Band	4
		Frequency	TX 5815MHz

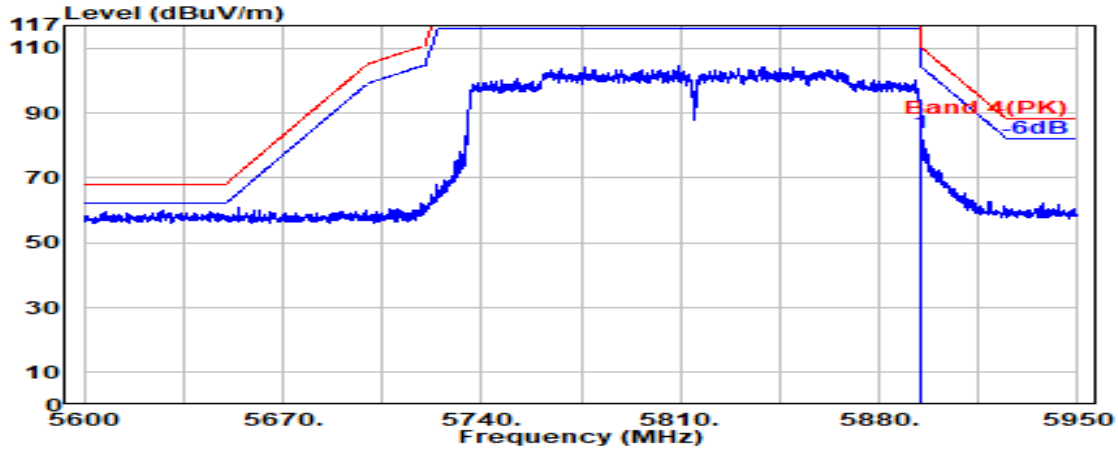

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	80.02	83.95	110.16	26.21	Peak

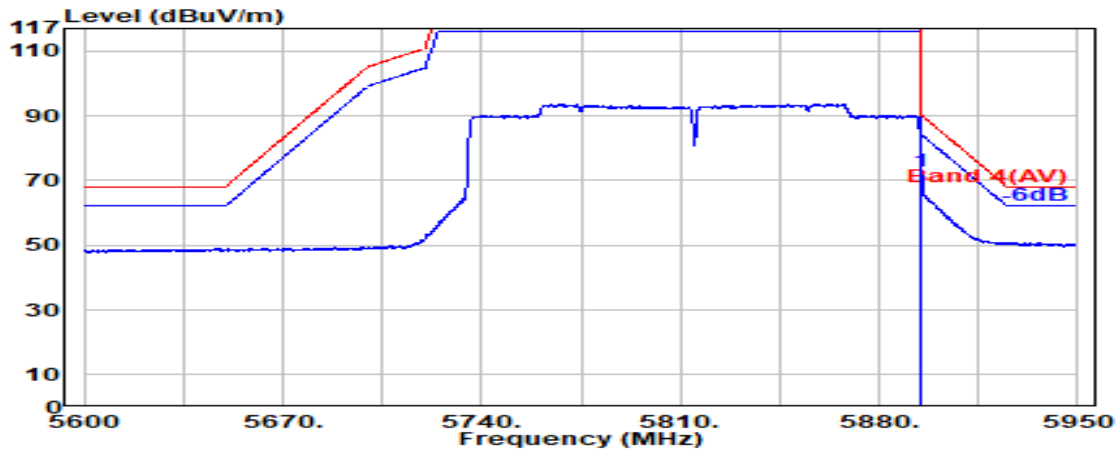


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	68.99	72.91	90.16	17.25	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

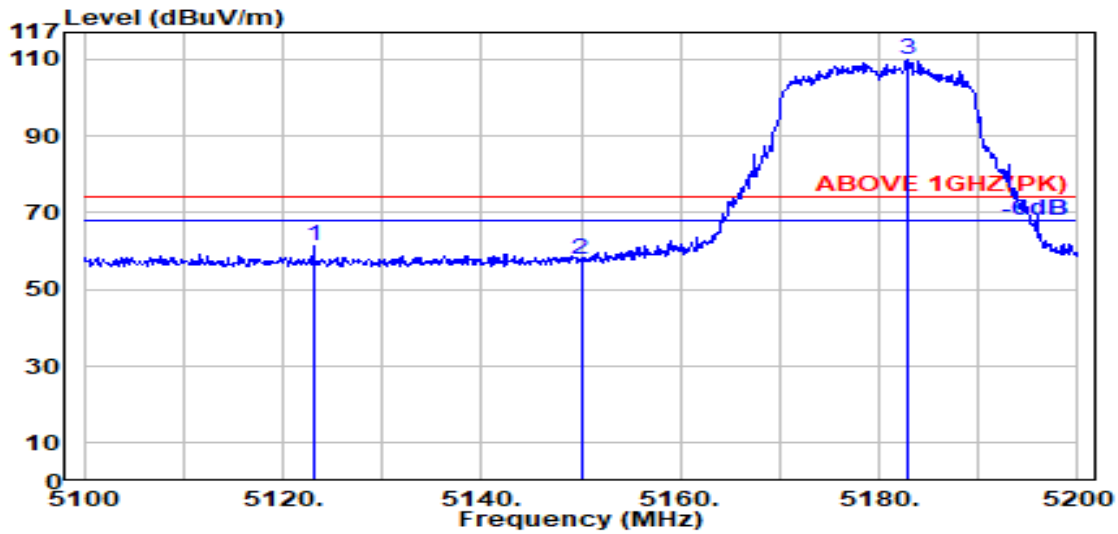

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.100	33.45	8.35	39.19	58.73	61.33	74.00	12.67	Peak
5150.000	33.50	8.37	39.19	55.33	58.01	74.00	15.99	Peak
@ 5182.800	33.70	8.41	39.19	106.94	109.86	---	---	Peak

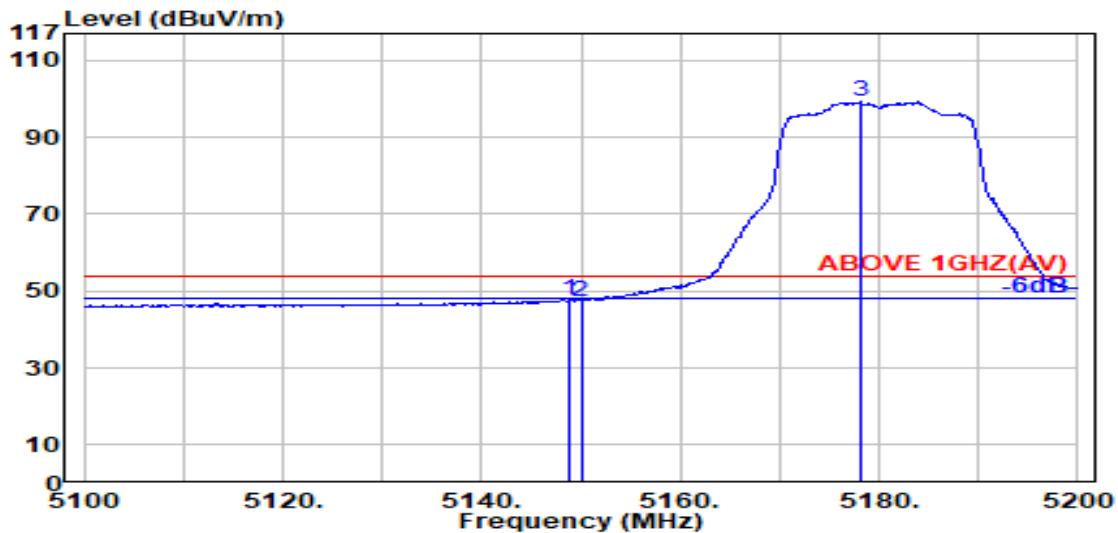


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.19	44.90	47.58	54.00	6.42	Average
5150.000	33.50	8.37	39.19	44.75	47.43	54.00	6.57	Average
@ 5178.100	33.67	8.40	39.19	96.34	99.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

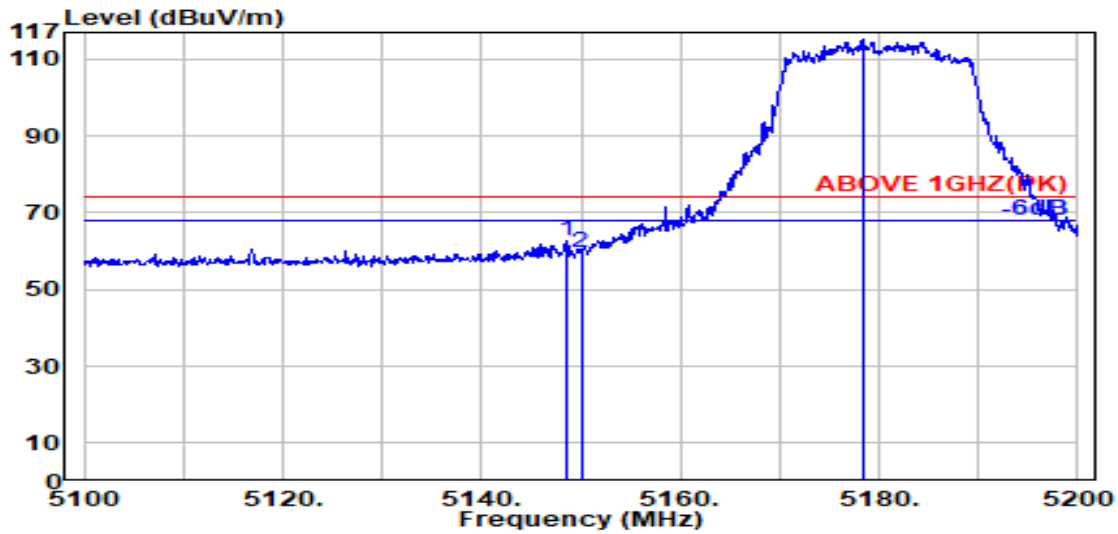

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.50	8.37	39.19	60.06	62.74	74.00	11.26	Peak
5150.000	33.50	8.37	39.19	56.76	59.44	74.00	14.56	Peak
@ 5178.300	33.67	8.40	39.19	112.16	115.05	---	---	Peak

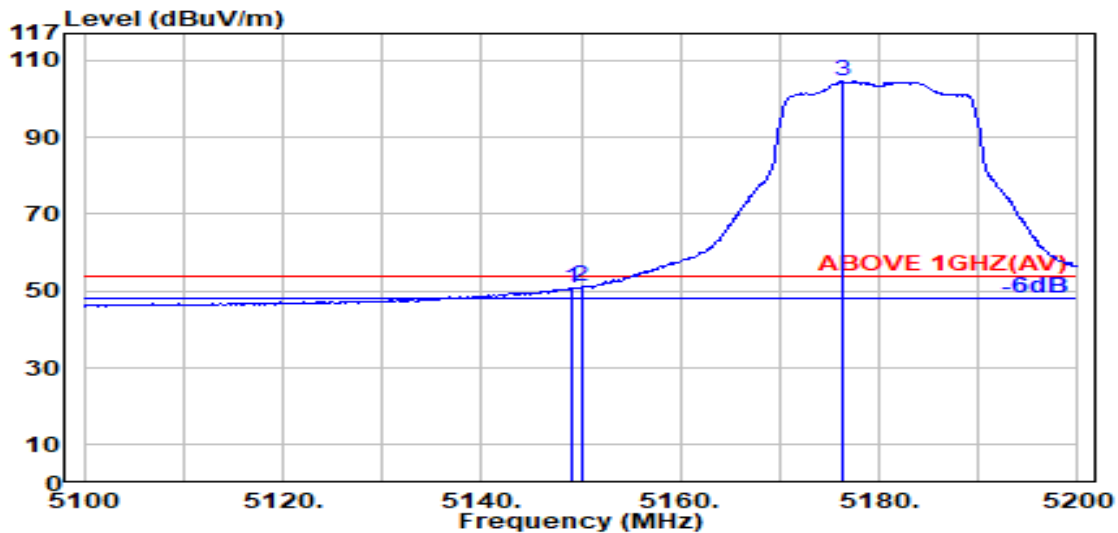


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	48.29	50.97	54.00	3.03	Average
5150.000	33.50	8.37	39.19	48.46	51.15	54.00	2.85	Average
@ 5176.400	33.66	8.40	39.19	101.75	104.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

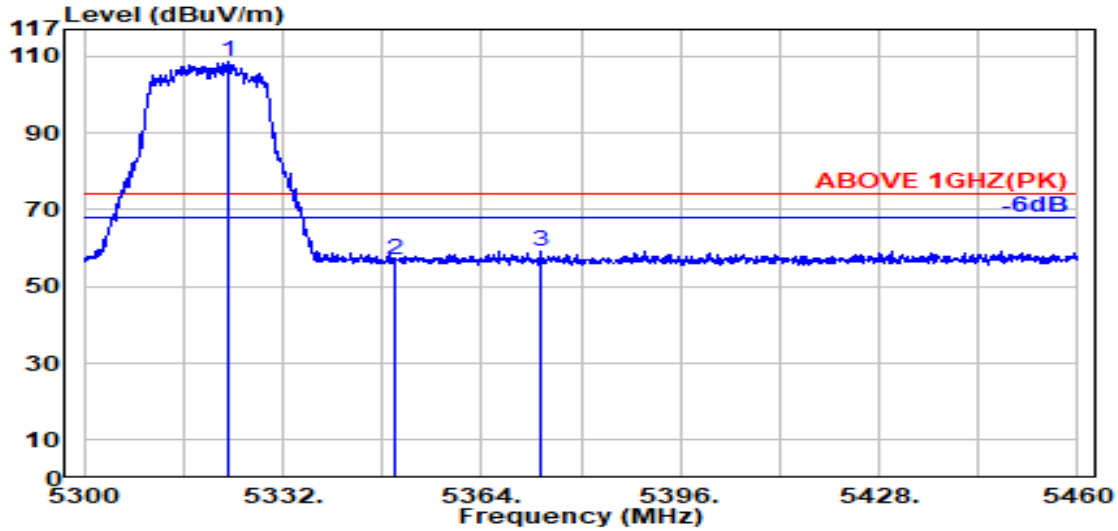

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.100	33.75	8.55	39.17	105.60	108.73	---	---	Peak
5350.000	33.70	8.57	39.17	54.01	57.11	74.00	16.89	Peak
5373.600	33.79	8.60	39.16	56.13	59.36	74.00	14.64	Peak

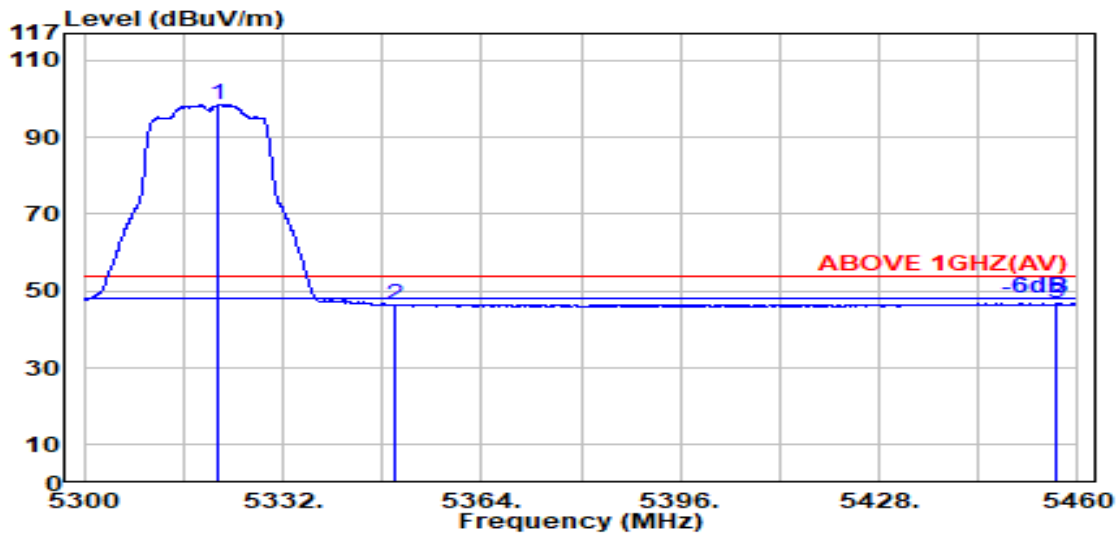


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	33.76	8.54	39.17	95.44	98.57	---	---	Average
5350.000	33.70	8.57	39.17	43.37	46.47	54.00	7.53	Average
5456.700	34.01	8.68	39.15	43.15	46.68	54.00	7.32	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

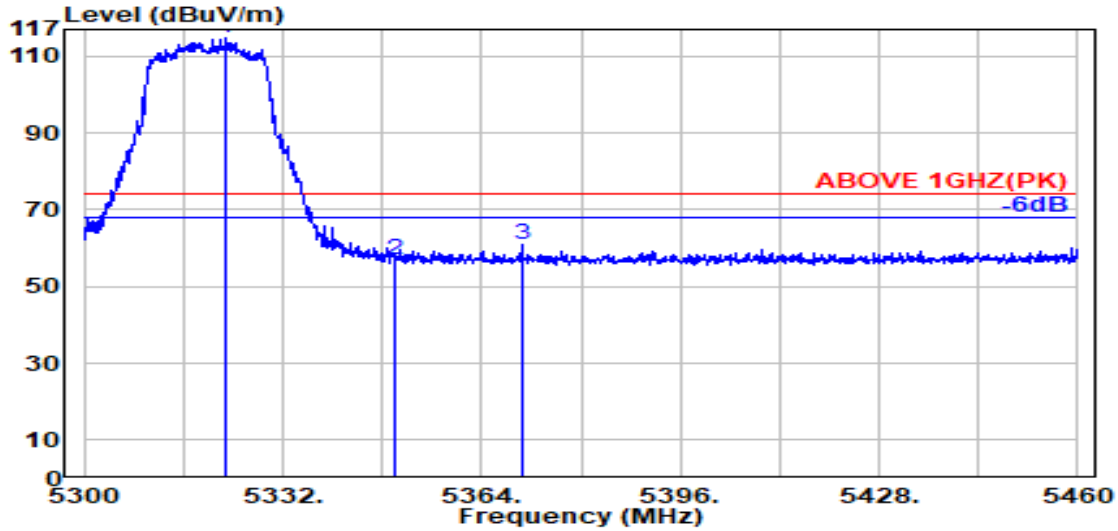

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.800	33.75	8.55	39.17	111.50	114.63	---	---	Peak
5350.000	33.70	8.57	39.17	53.77	56.88	74.00	17.12	Peak
5370.400	33.78	8.59	39.17	57.56	60.76	74.00	13.24	Peak

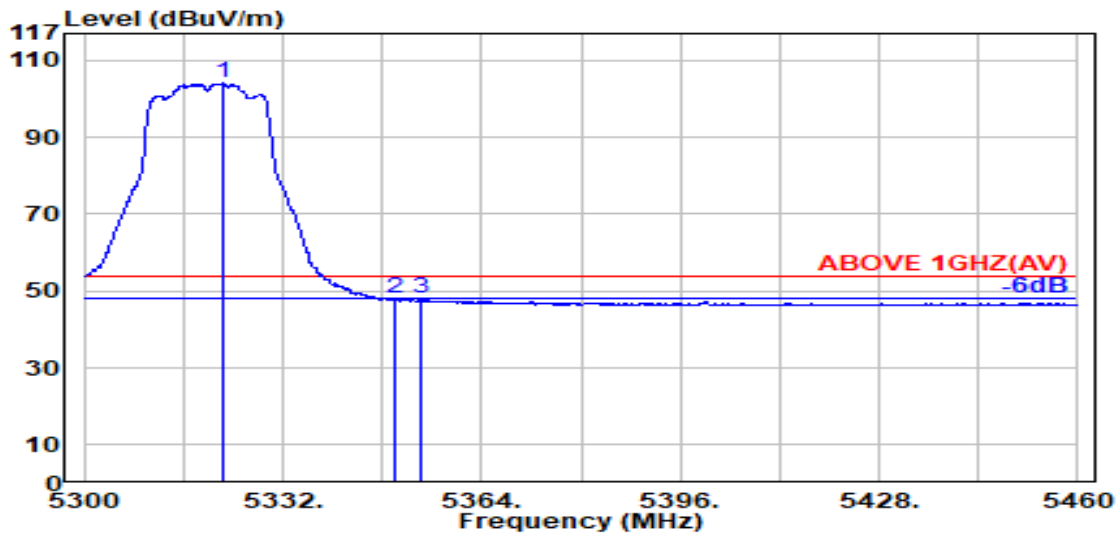


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	33.76	8.55	39.17	100.90	104.03	---	---	Average
5350.000	33.70	8.57	39.17	44.89	48.00	54.00	6.00	Average
5354.300	33.72	8.58	39.17	44.83	47.95	54.00	6.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

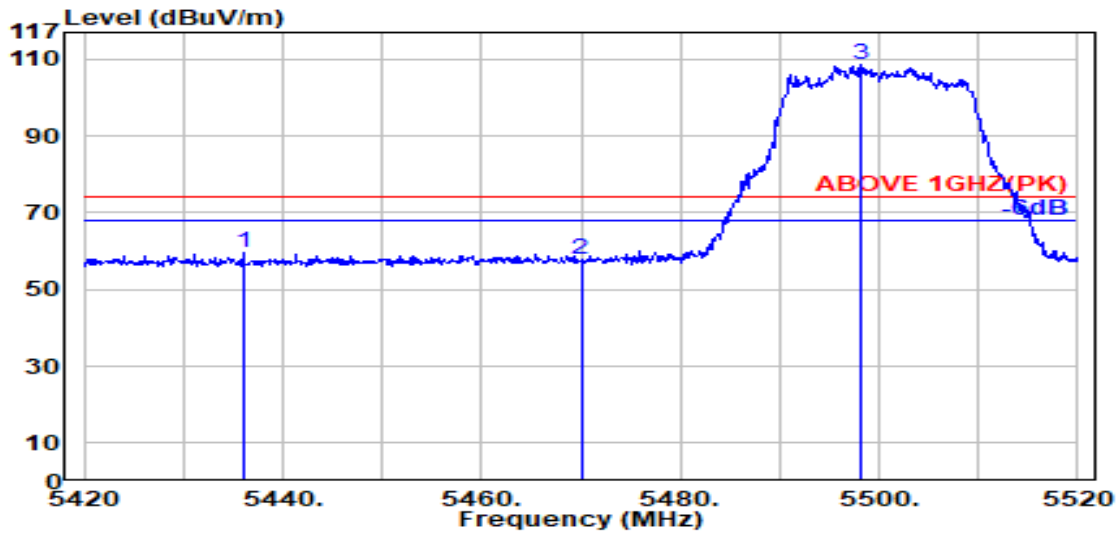

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.100	33.97	8.66	39.16	56.31	59.78	74.00	14.22	Peak
5470.000	34.04	8.69	39.15	54.13	57.70	74.00	16.30	Peak
@ 5498.100	34.10	8.71	39.15	104.83	108.49	---	---	Peak

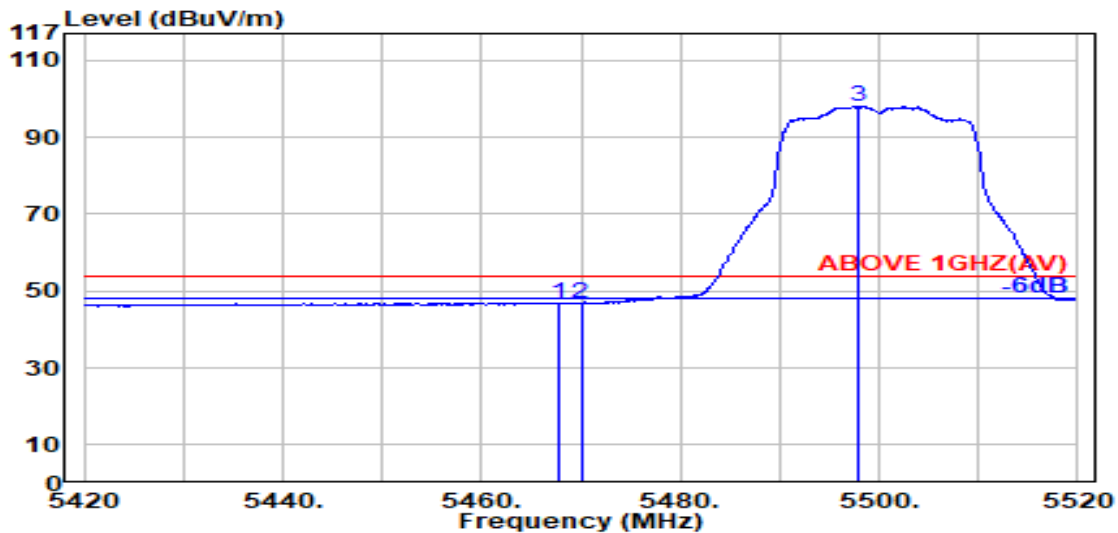


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.15	43.45	47.02	54.00	6.98	Average
5470.000	34.04	8.69	39.15	43.20	46.78	54.00	7.22	Average
@ 5497.800	34.10	8.71	39.15	94.37	98.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

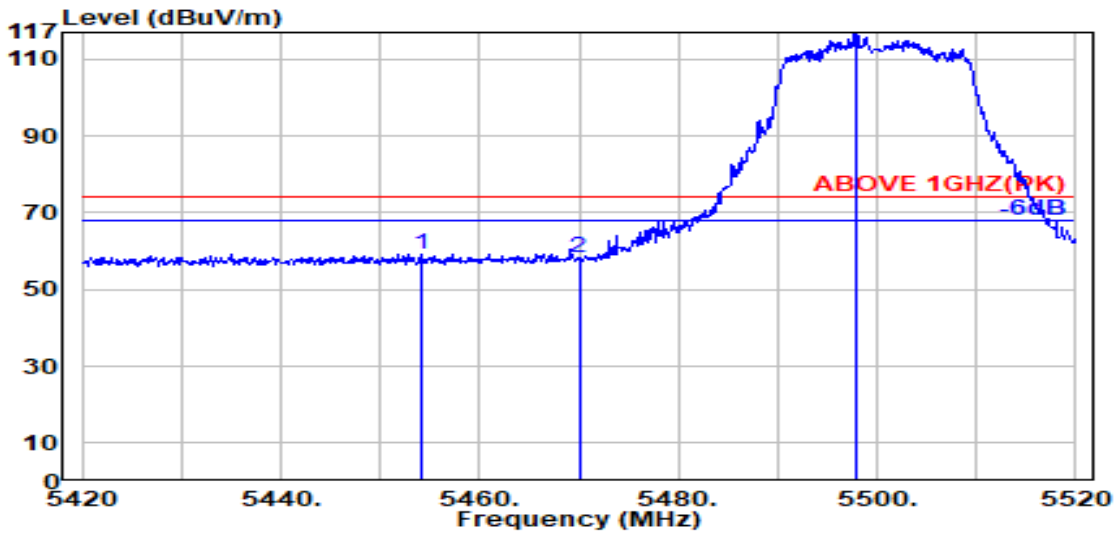

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.100	34.01	8.67	39.16	55.73	59.26	74.00	14.74	Peak
5470.000	34.04	8.69	39.15	54.63	58.21	74.00	15.79	Peak
@ 5497.800	34.10	8.71	39.15	113.70	117.36	---	---	Peak

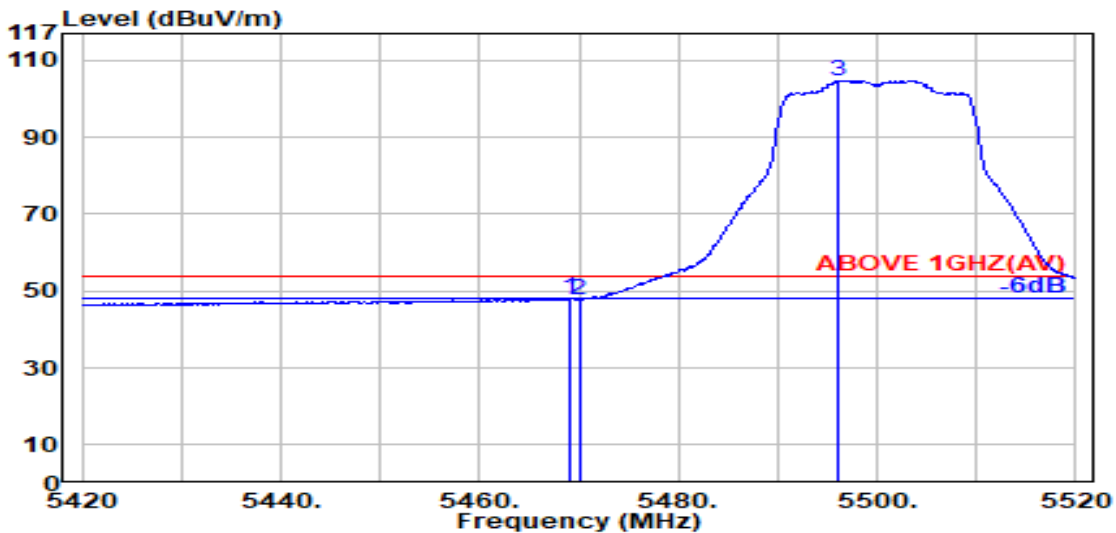


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	44.55	48.12	54.00	5.88	Average
5470.000	34.04	8.69	39.15	44.33	47.90	54.00	6.10	Average
@ 5496.000	34.09	8.71	39.15	101.13	104.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

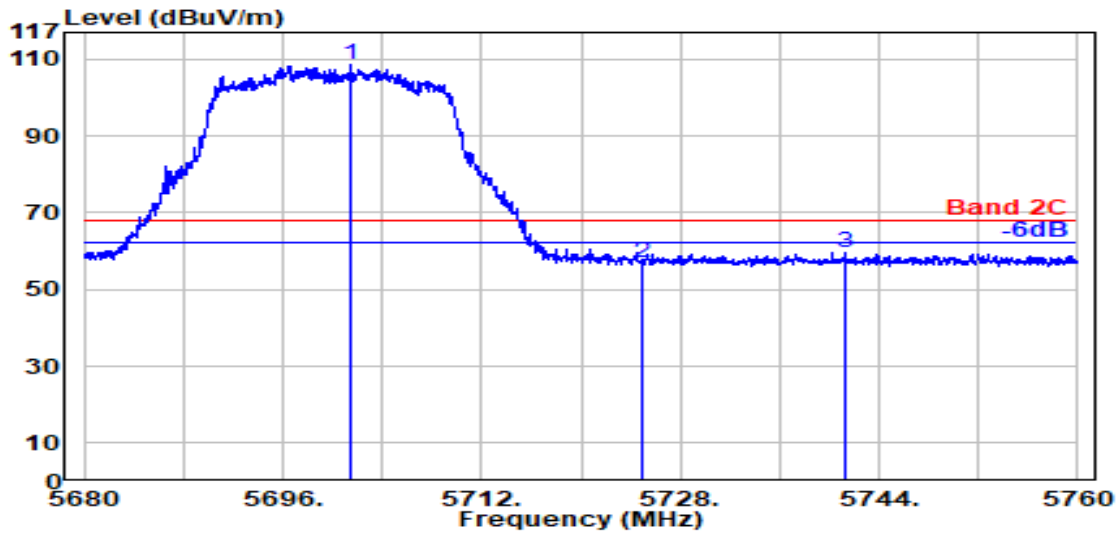

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.500	33.60	8.90	39.19	105.34	108.66	---	---	Peak
5725.000	33.60	8.93	39.20	53.43	56.76	68.20	11.44	Peak
5741.250	33.60	8.94	39.20	56.30	59.65	68.20	8.55	Peak

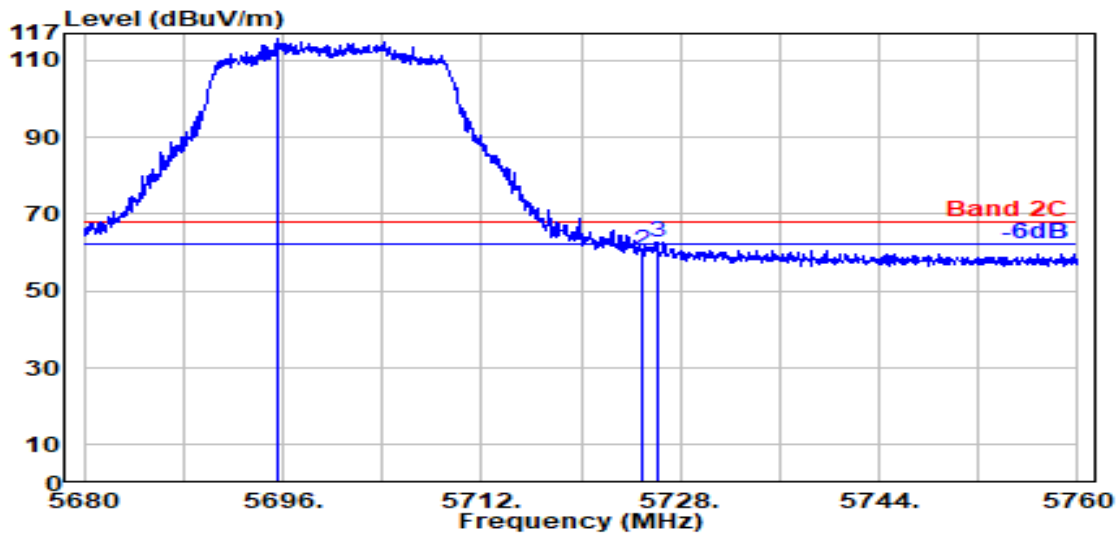


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.550	33.62	8.90	39.19	112.37	115.70	---	---	Peak
5725.000	33.60	8.93	39.20	57.34	60.67	68.20	7.53	Peak
5726.100	33.60	8.93	39.20	59.40	62.73	68.20	5.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

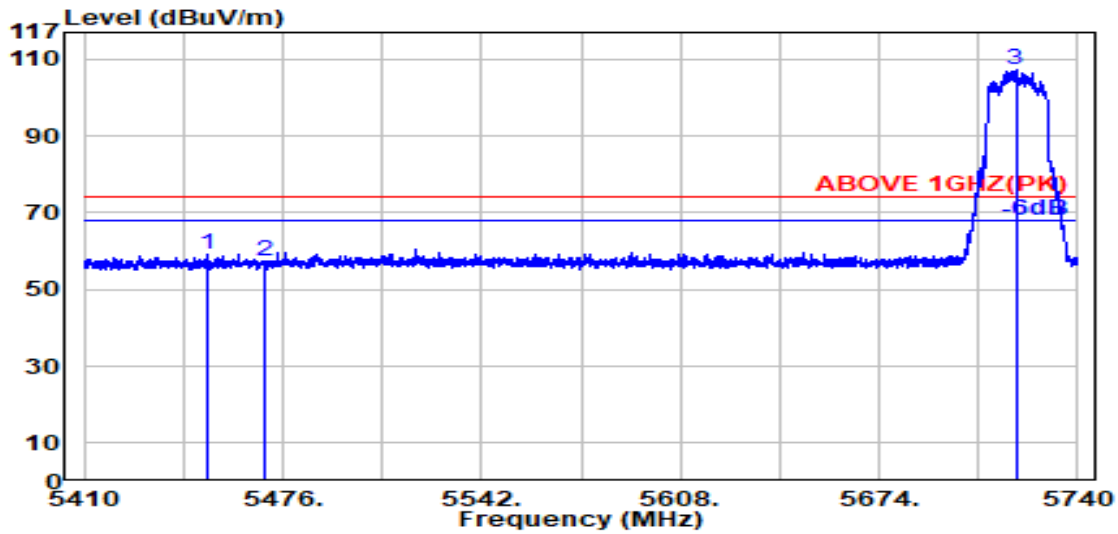

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.700	34.00	8.67	39.16	55.57	59.09	74.00	14.91	Peak
5470.000	34.04	8.69	39.15	53.90	57.48	74.00	16.52	Peak
@ 5719.400	33.60	8.92	39.19	104.07	107.40	---	---	Peak

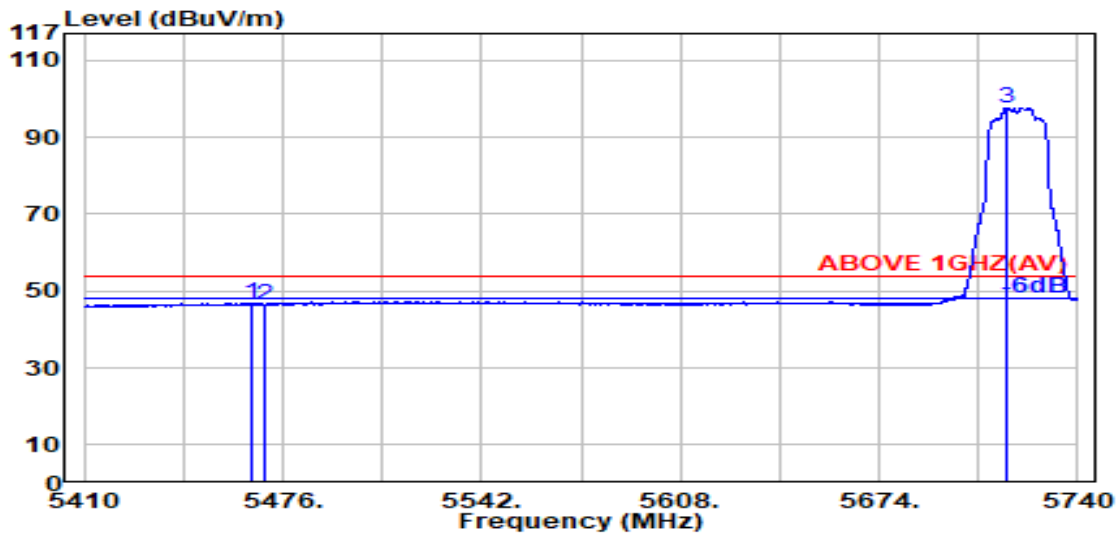


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.03	8.68	39.15	43.28	46.84	54.00	7.16	Average
5470.000	34.04	8.69	39.15	42.92	46.50	54.00	7.50	Average
@ 5716.300	33.60	8.92	39.19	94.46	97.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

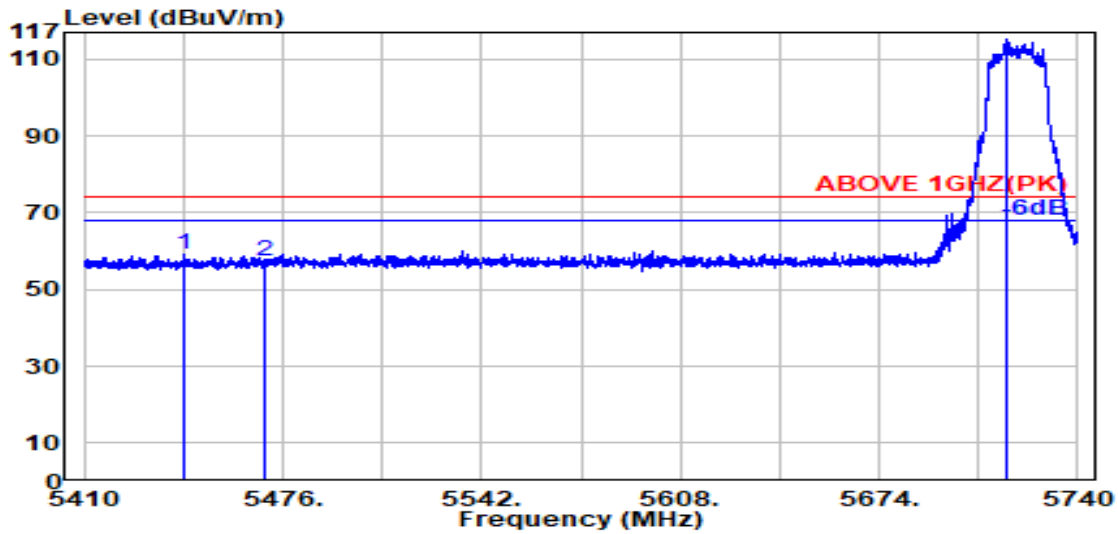

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.900	33.99	8.66	39.16	55.66	59.15	74.00	14.85	Peak
5470.000	34.04	8.69	39.15	53.67	57.25	74.00	16.75	Peak
@ 5716.500	33.60	8.92	39.19	111.73	115.05	---	---	Peak

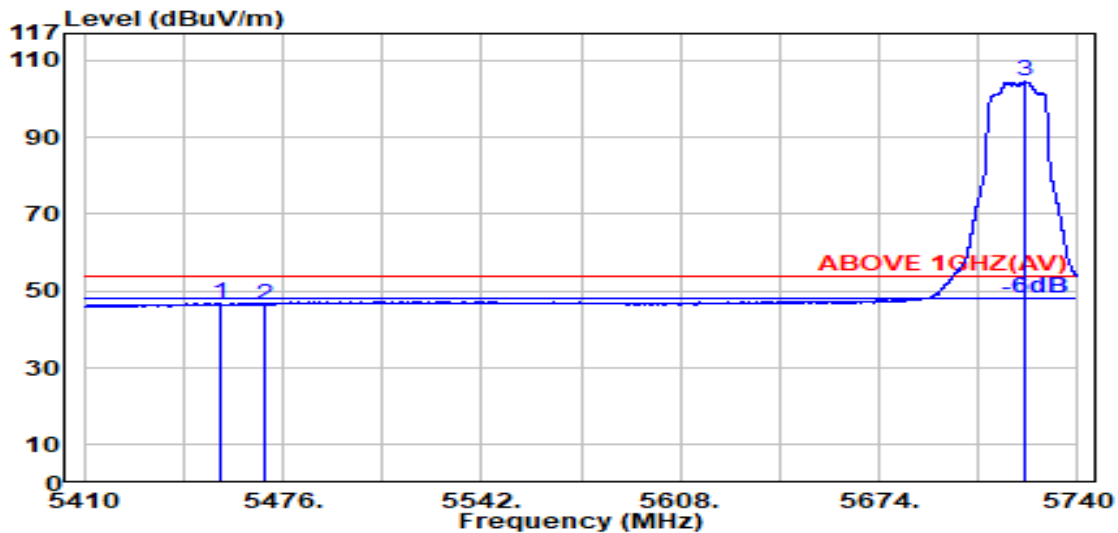


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.100	34.01	8.67	39.16	43.35	46.88	54.00	7.12	Average
5470.000	34.04	8.69	39.15	42.98	46.55	54.00	7.45	Average
@ 5722.400	33.60	8.92	39.20	101.26	104.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

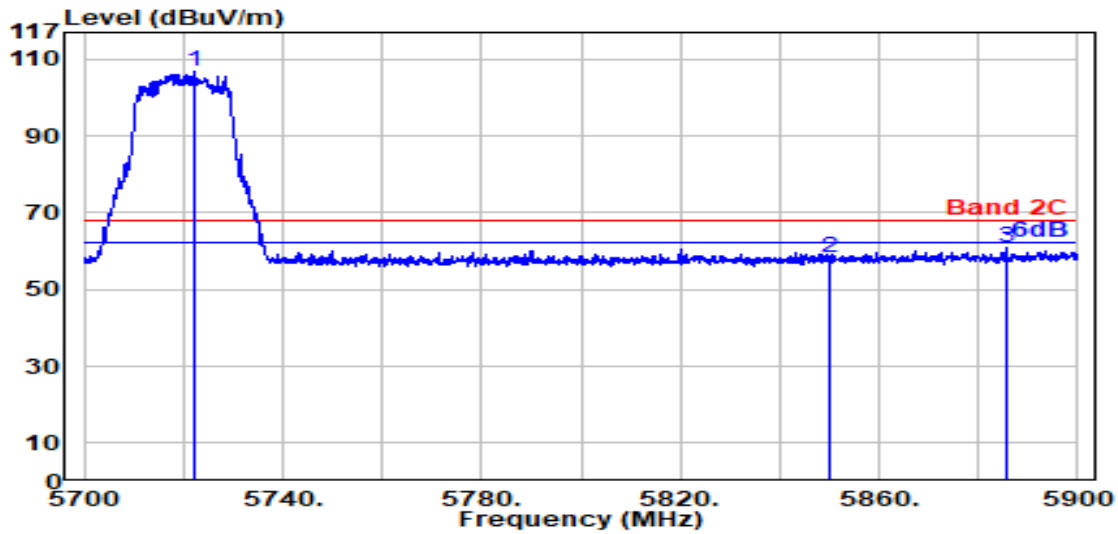

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.200	33.60	8.92	39.20	103.70	107.03	---	---	Peak
5850.000	33.90	9.04	39.22	54.59	58.31	68.20	9.89	Peak
5885.600	34.04	9.07	39.23	57.10	60.98	68.20	7.22	Peak

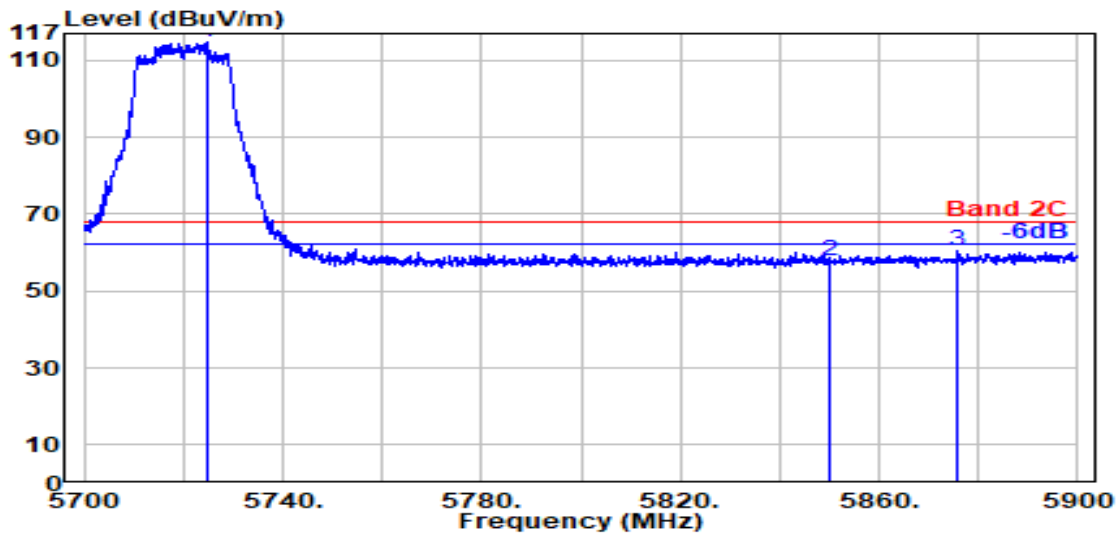


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.600	33.60	8.93	39.20	111.27	114.60	---	---	Peak
5850.000	33.90	9.04	39.22	54.26	57.98	68.20	10.22	Peak
5875.900	34.00	9.06	39.23	56.60	60.44	68.20	7.76	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

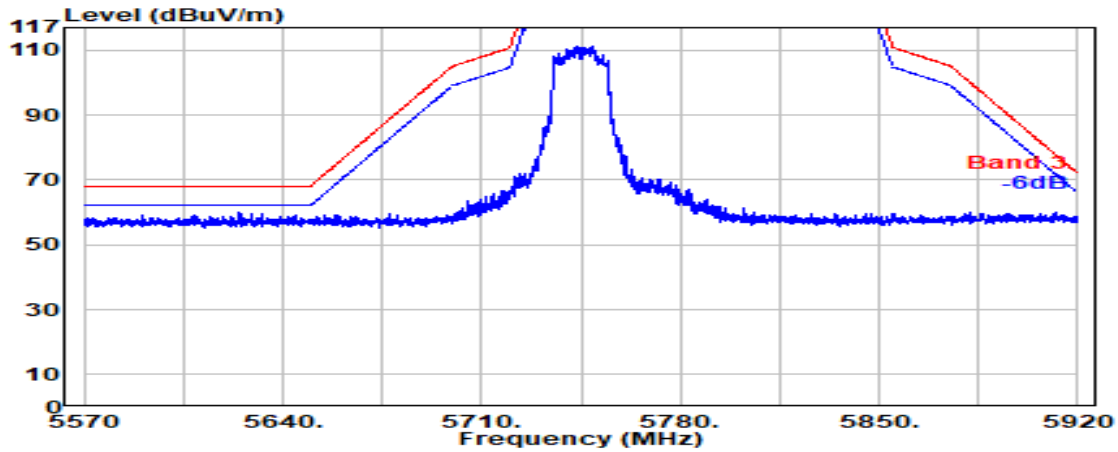


Antenna at Vertical Polarization

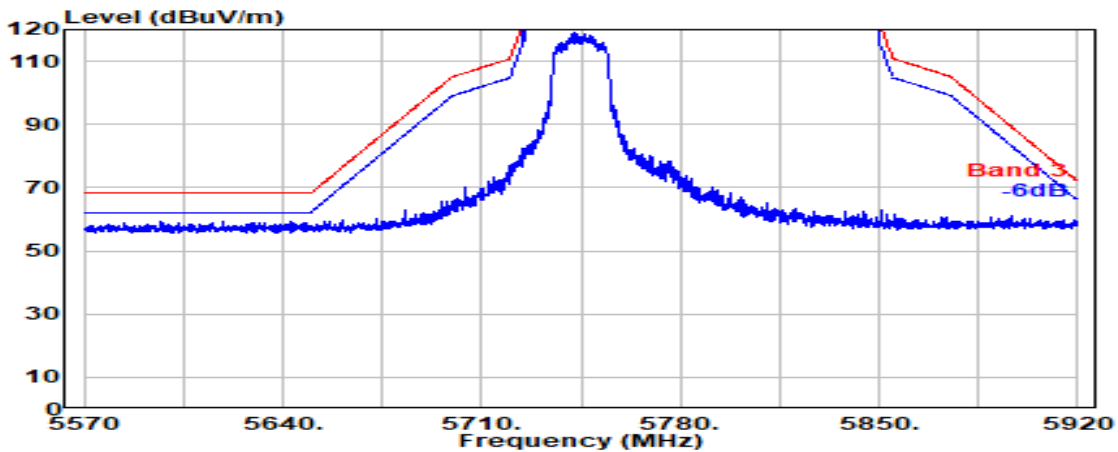


Mode	802.11be-EHT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

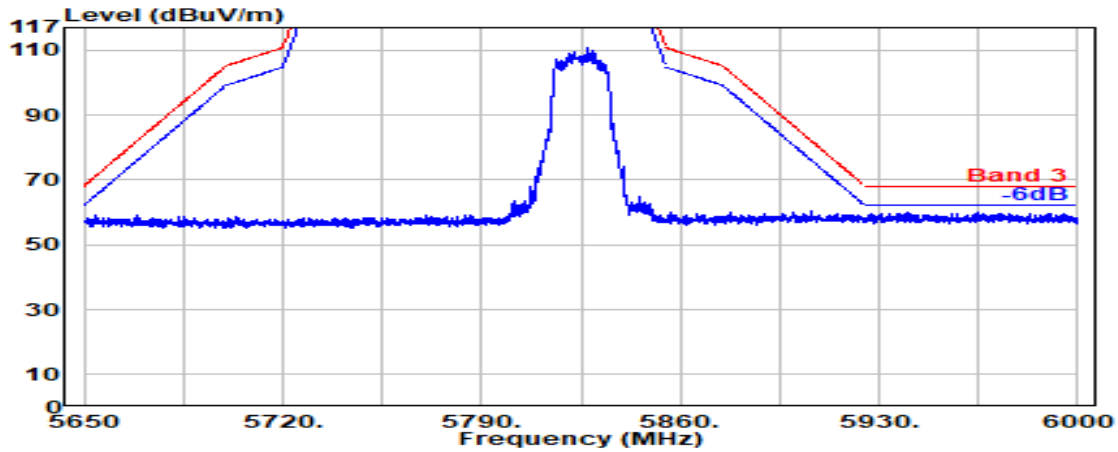

Antenna at Vertical Polarization

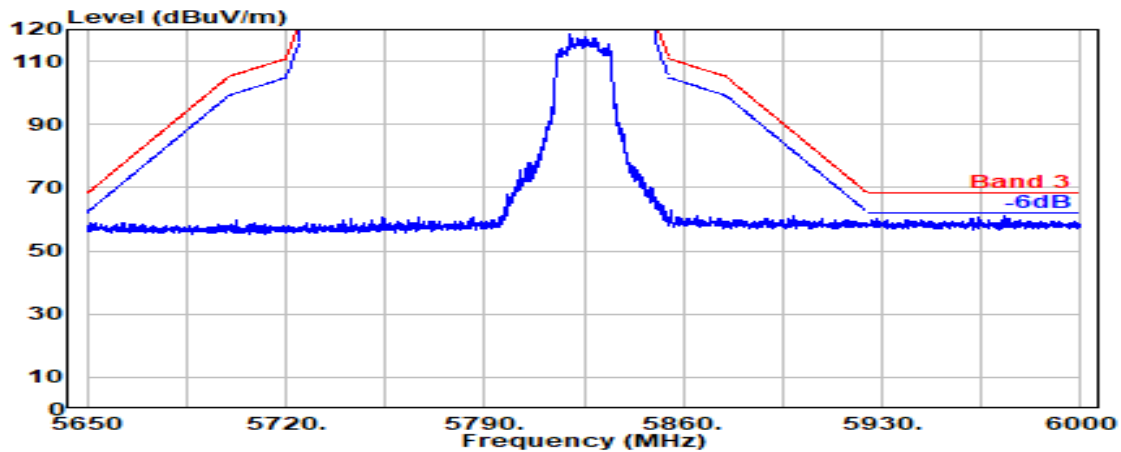


Mode	802.11be-EHT20	U-NII Band	4
		Frequency	TX 5885MHz

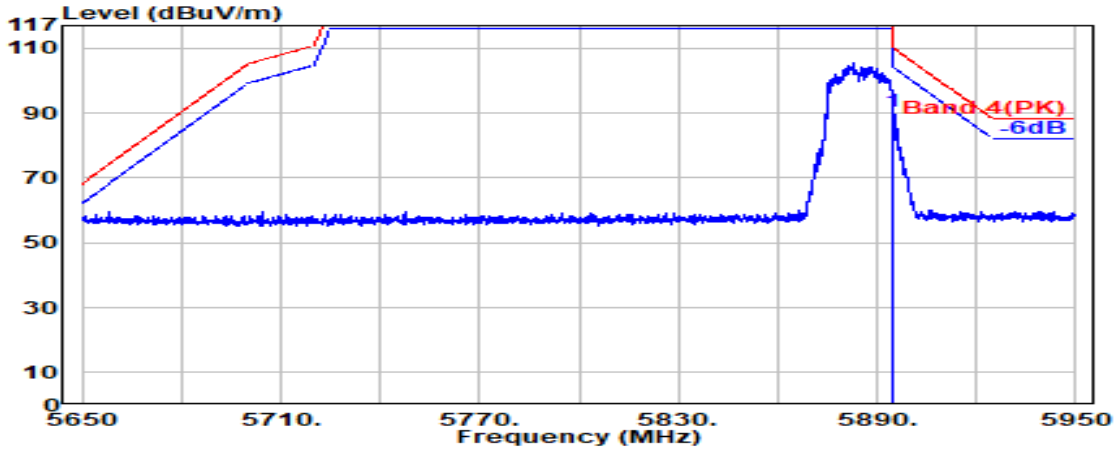

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	86.69	90.62	110.20	19.58	Peak

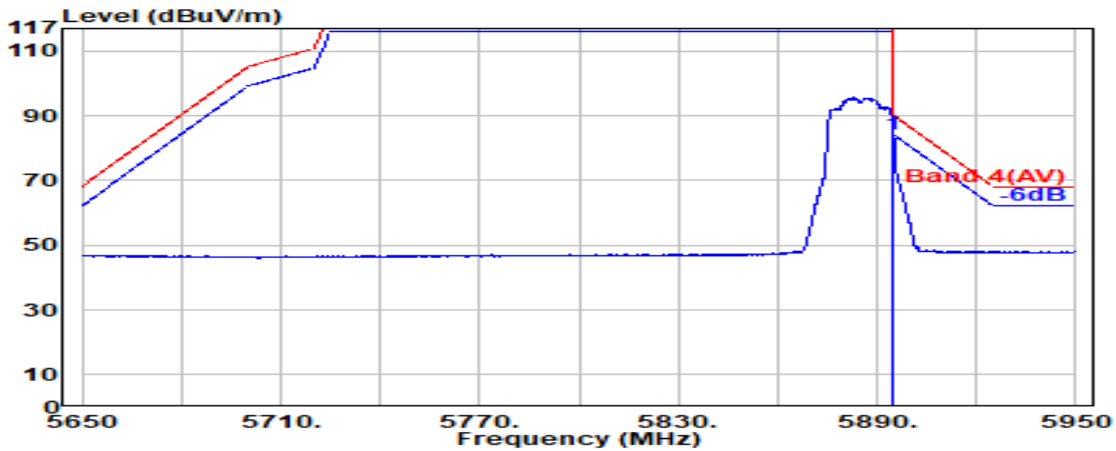


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	80.45	84.38	90.20	5.82	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT20	U-NII Band	4
		Frequency	TX 5885MHz

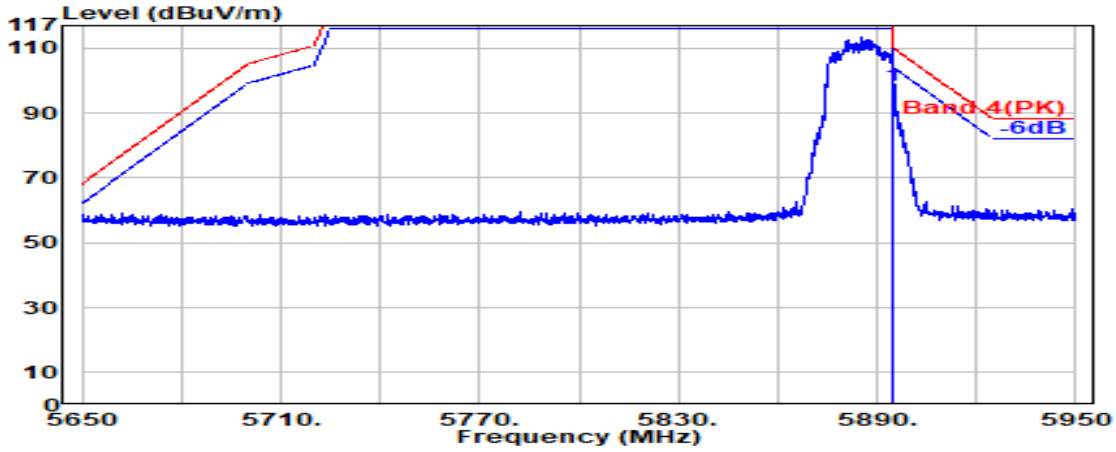

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	94.62	98.55	110.20	11.65	Peak

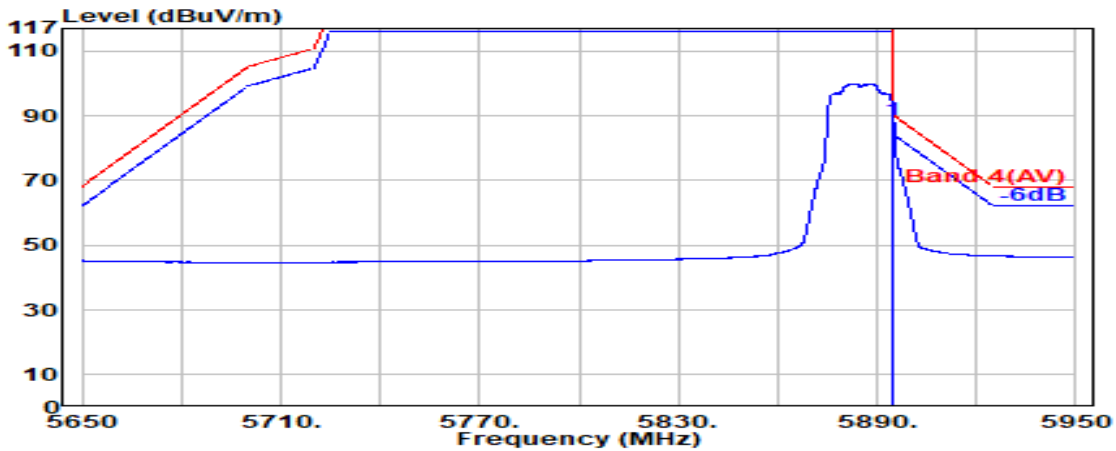


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	84.75	88.68	90.20	1.52	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

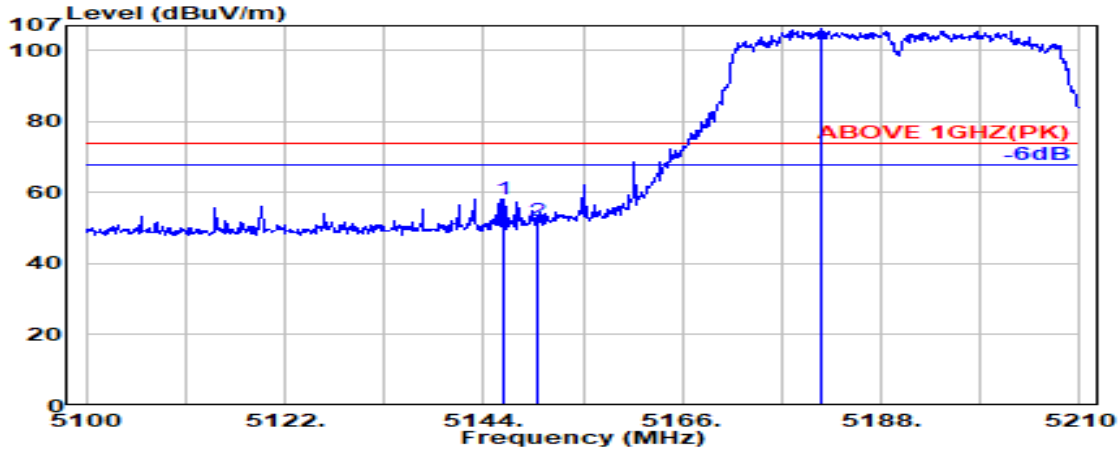

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.090	33.49	8.37	39.27	55.65	58.24	74.00	15.76	Peak
5150.000	33.50	8.37	39.27	49.63	52.24	74.00	21.76	Peak
@ 5181.290	33.69	8.41	39.27	103.26	106.09	---	---	Peak

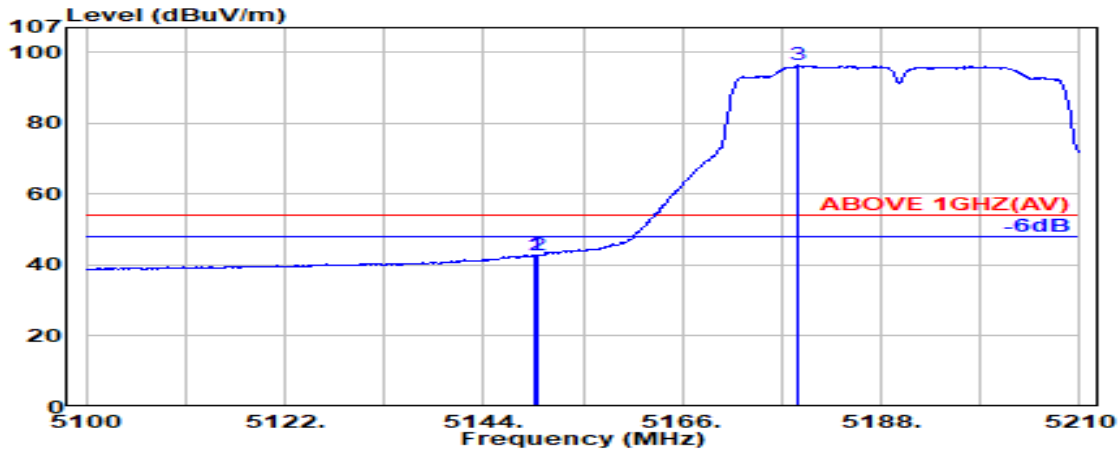


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.090	33.49	8.37	39.27	55.65	58.24	74.00	15.76	Average
5150.000	33.50	8.37	39.27	49.63	52.24	74.00	21.76	Average
@ 5181.290	33.69	8.41	39.27	103.26	106.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

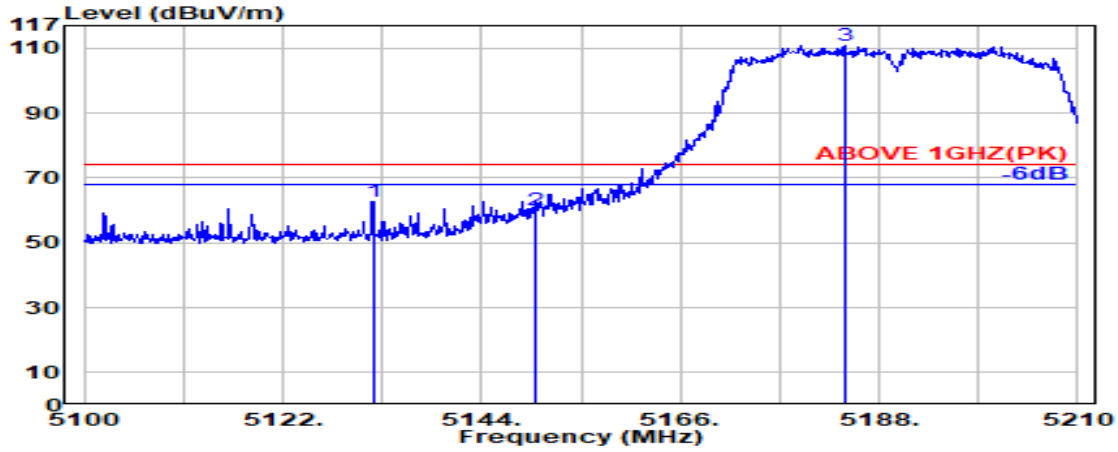

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.010	33.46	8.36	39.27	60.34	62.89	74.00	11.11	Peak
5150.000	33.50	8.37	39.27	57.42	60.02	74.00	13.98	Peak
@ 5184.150	33.71	8.41	39.27	107.97	110.82	---	---	Peak

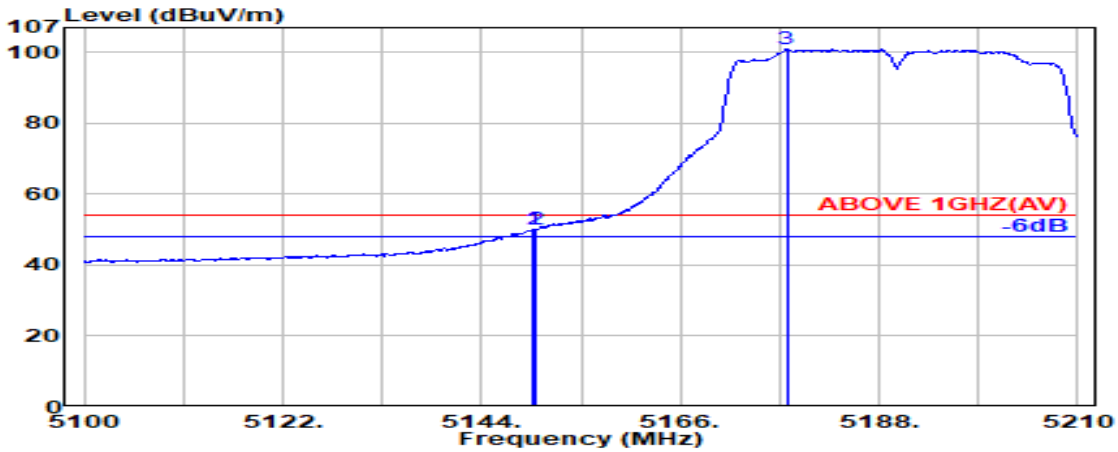


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	33.50	8.37	39.27	47.32	49.92	54.00	4.08	Average
5150.000	33.50	8.37	39.27	47.41	50.01	54.00	3.99	Average
@ 5177.770	33.67	8.40	39.27	98.26	101.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

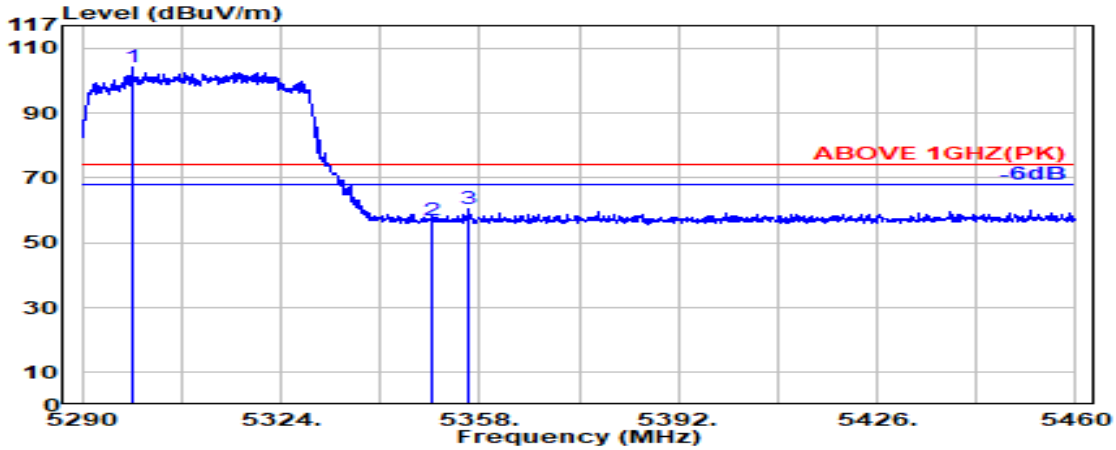

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.600	33.80	8.52	39.17	101.04	104.18	---	---	Peak
5350.000	33.70	8.57	39.17	53.71	56.82	74.00	17.18	Peak
5356.200	33.72	8.58	39.17	57.24	60.37	74.00	13.63	Peak

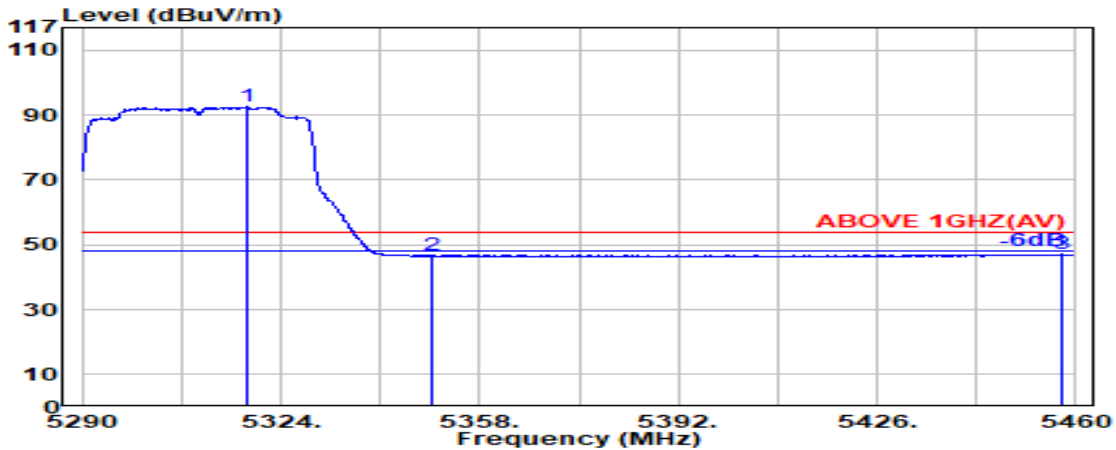


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.100	33.76	8.54	39.17	89.52	92.65	---	---	Average
5350.000	33.70	8.57	39.17	43.49	46.59	54.00	7.41	Average
5457.500	34.02	8.68	39.15	43.50	47.03	54.00	6.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

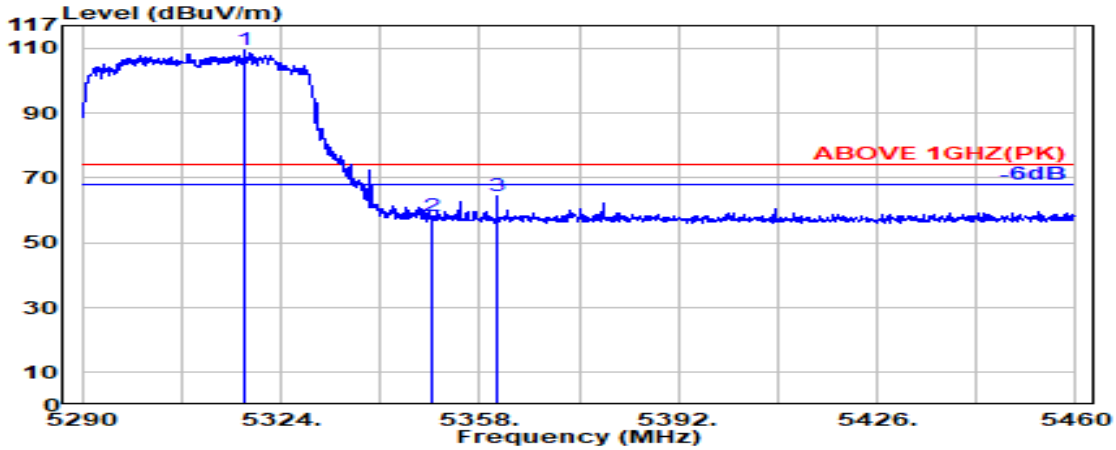

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.800	33.76	8.54	39.17	106.23	109.37	---	---	Peak
5350.000	33.70	8.57	39.17	54.96	58.06	74.00	15.94	Peak
5360.900	33.74	8.58	39.17	61.09	64.25	74.00	9.75	Peak

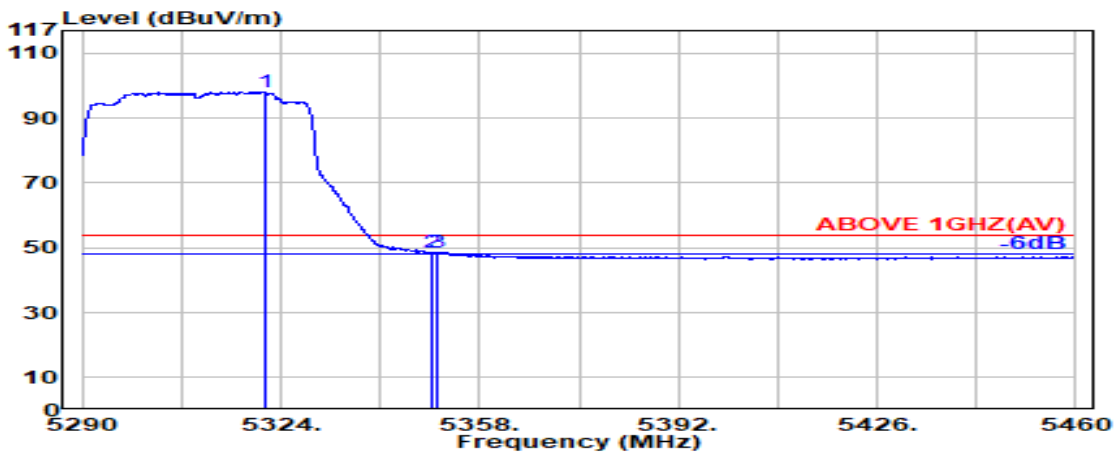


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.300	33.76	8.54	39.17	95.10	98.23	---	---	Average
5350.000	33.70	8.57	39.17	45.26	48.37	54.00	5.63	Average
5350.600	33.70	8.57	39.17	45.65	48.76	54.00	5.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

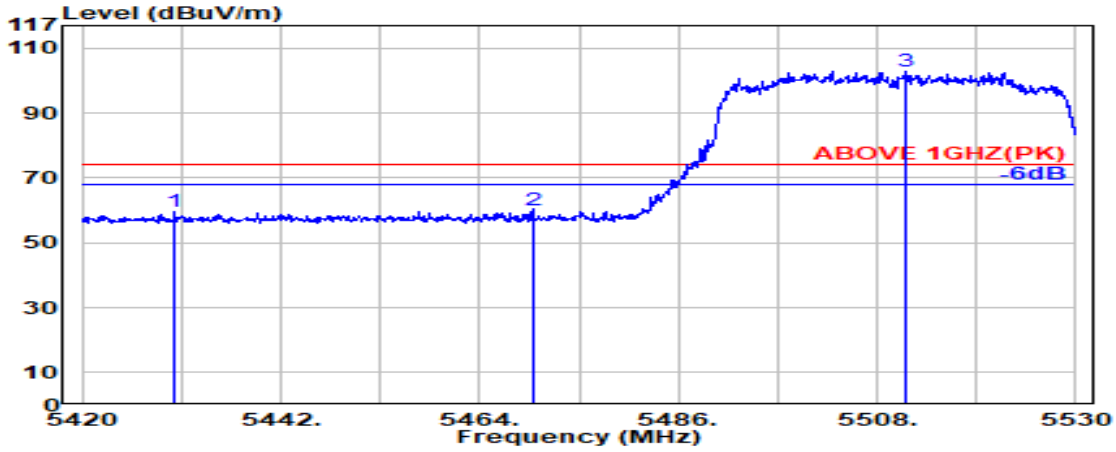

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.200	33.96	8.65	39.16	56.24	59.69	74.00	14.31	Peak
5470.000	34.04	8.69	39.15	56.68	60.26	74.00	13.74	Peak
@ 5511.300	34.08	8.73	39.15	99.05	102.70	---	---	Peak

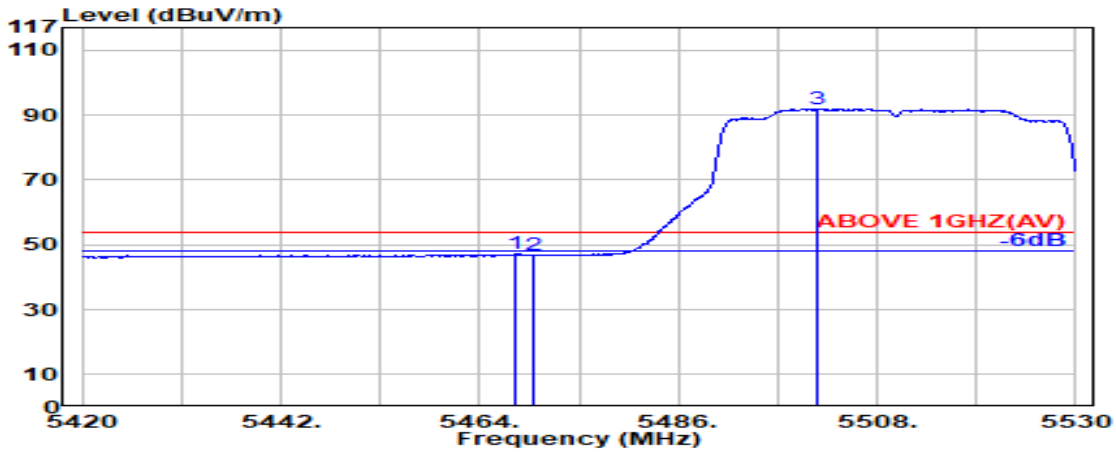


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	43.53	47.10	54.00	6.90	Average
5470.000	34.04	8.69	39.15	43.22	46.79	54.00	7.21	Average
@ 5501.400	34.10	8.72	39.15	88.34	92.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

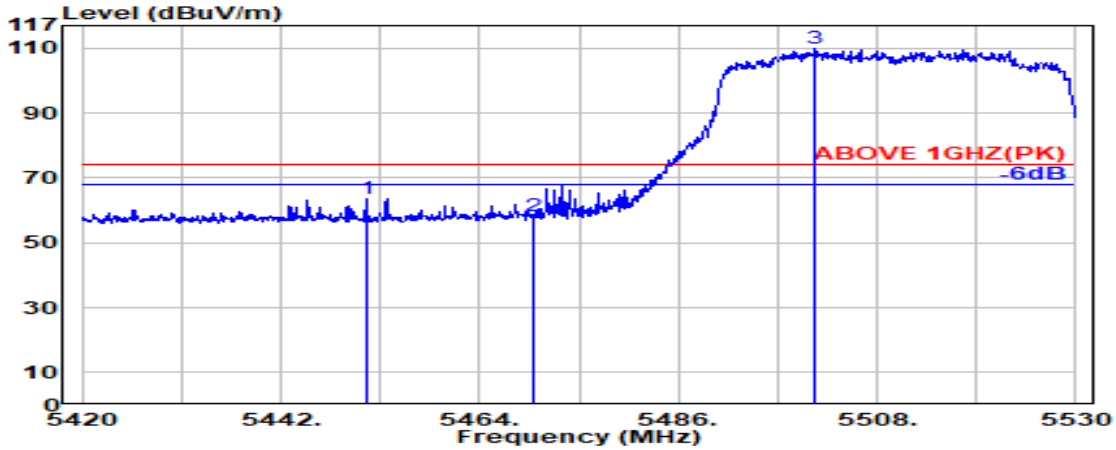

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.400	34.00	8.67	39.16	60.20	63.72	74.00	10.28	Peak
5470.000	34.04	8.69	39.15	54.77	58.35	74.00	15.65	Peak
@ 5501.200	34.10	8.72	39.15	106.48	110.15	---	---	Peak

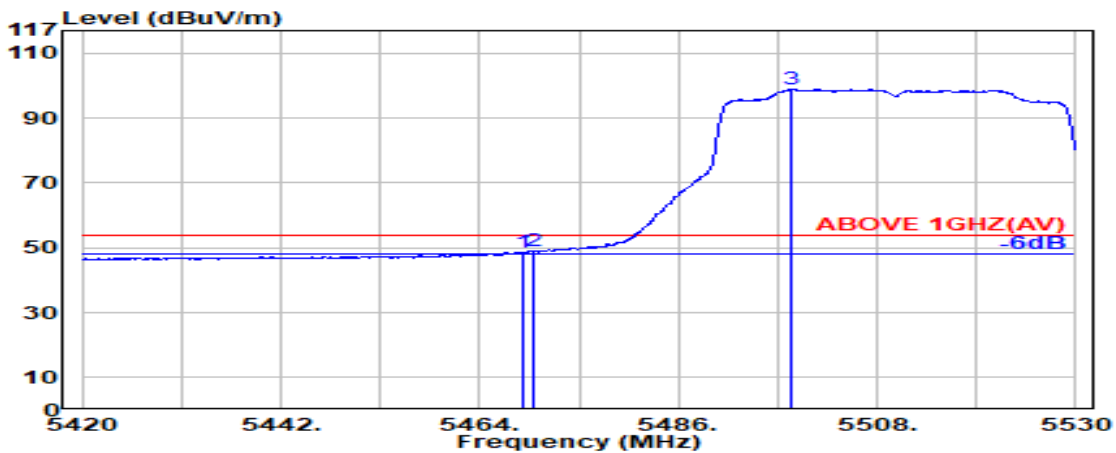


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	45.03	48.60	54.00	5.40	Average
5470.000	34.04	8.69	39.15	45.47	49.04	54.00	4.96	Average
@ 5498.400	34.10	8.72	39.15	95.36	99.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

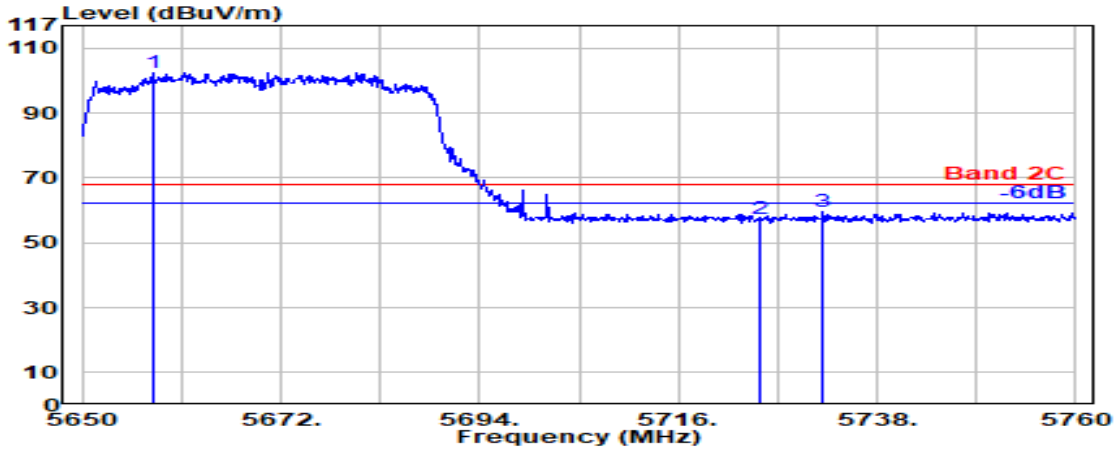

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5657.900	33.77	8.86	39.18	99.20	102.65	---	---	Peak
5725.000	33.60	8.93	39.20	54.28	57.61	68.20	10.59	Peak
5732.000	33.60	8.93	39.20	56.43	59.77	68.20	8.43	Peak

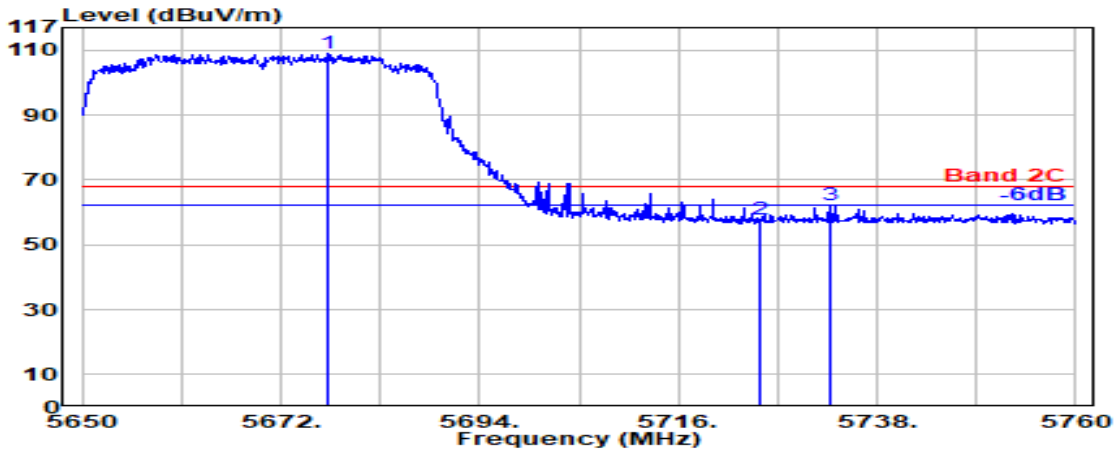


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.300	33.69	8.88	39.19	105.81	109.19	---	---	Peak
5725.000	33.60	8.93	39.20	54.32	57.65	68.20	10.55	Peak
5732.800	33.60	8.93	39.20	58.80	62.13	68.20	6.07	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

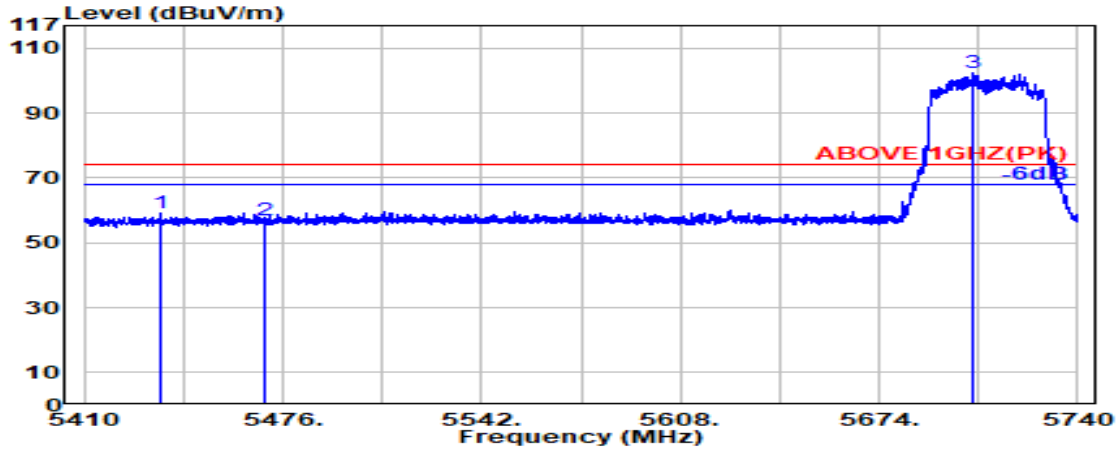

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.600	33.97	8.66	39.16	55.52	58.99	74.00	15.01	Peak
5470.000	34.04	8.69	39.15	53.58	57.15	74.00	16.85	Peak
@ 5705.500	33.60	8.91	39.19	99.01	102.33	---	---	Peak

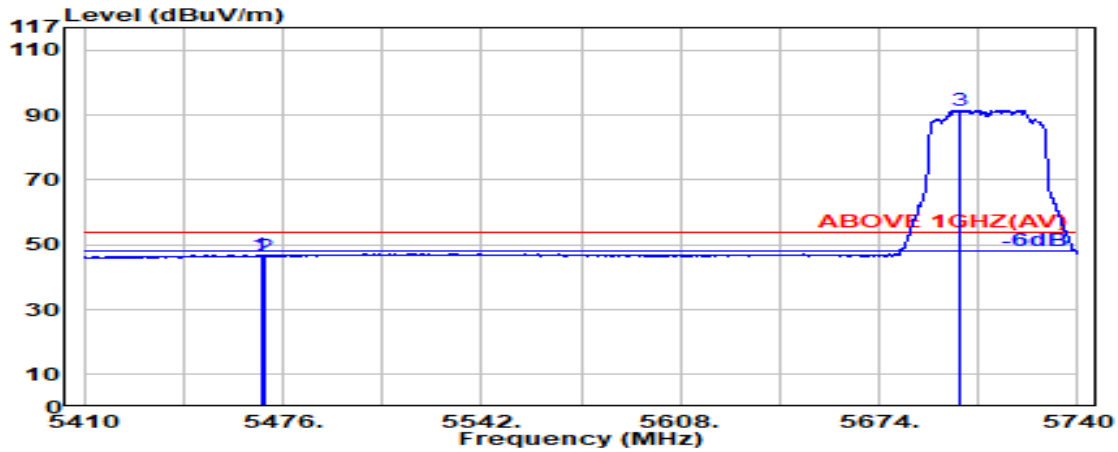


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	43.32	46.90	54.00	7.10	Average
5470.000	34.04	8.69	39.15	42.98	46.55	54.00	7.45	Average
@ 5700.500	33.60	8.90	39.19	88.23	91.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

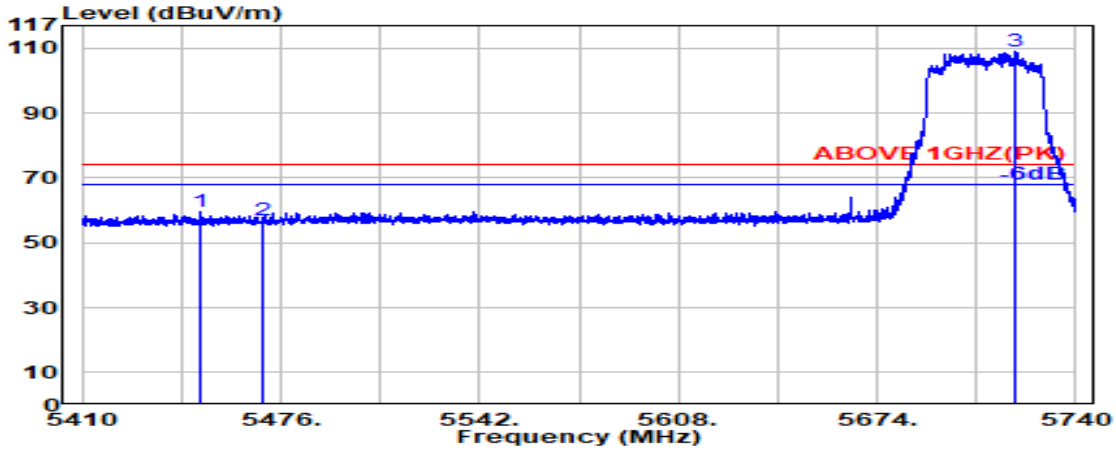

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.200	34.00	8.67	39.16	56.08	59.59	74.00	14.41	Peak
5470.000	34.04	8.69	39.15	53.29	56.86	74.00	17.14	Peak
@ 5719.800	33.60	8.92	39.20	105.67	109.00	---	---	Peak

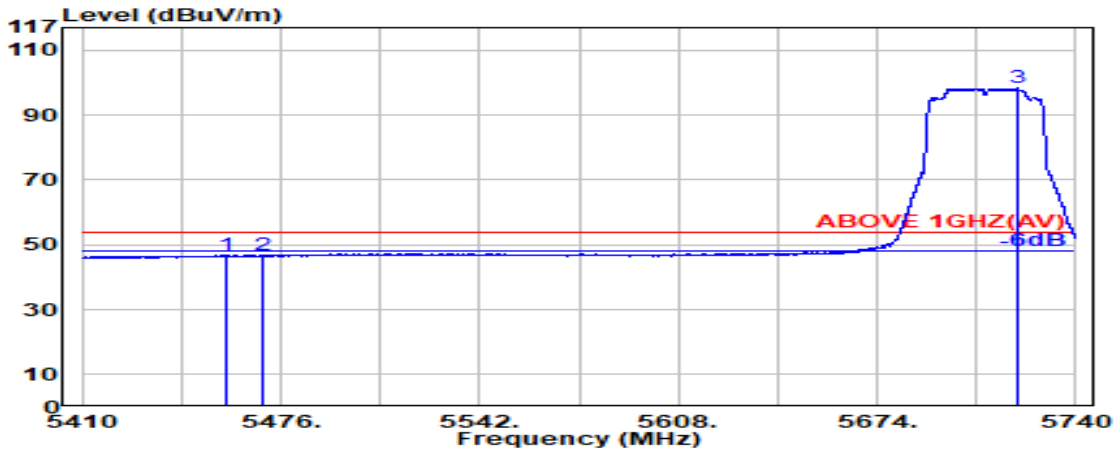


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.100	34.02	8.68	39.15	43.31	46.85	54.00	7.15	Average
5470.000	34.04	8.69	39.15	43.04	46.61	54.00	7.39	Average
@ 5720.700	33.60	8.92	39.20	94.95	98.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

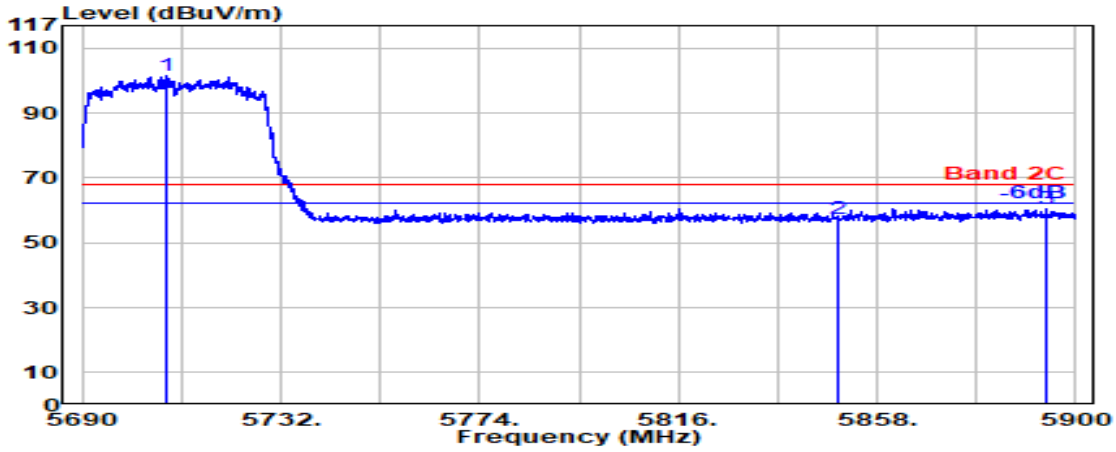

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.700	33.60	8.91	39.19	98.35	101.67	---	---	Peak
5850.000	33.90	9.04	39.22	53.63	57.34	68.20	10.86	Peak
5893.800	34.08	9.08	39.23	56.59	60.51	68.20	7.69	Peak

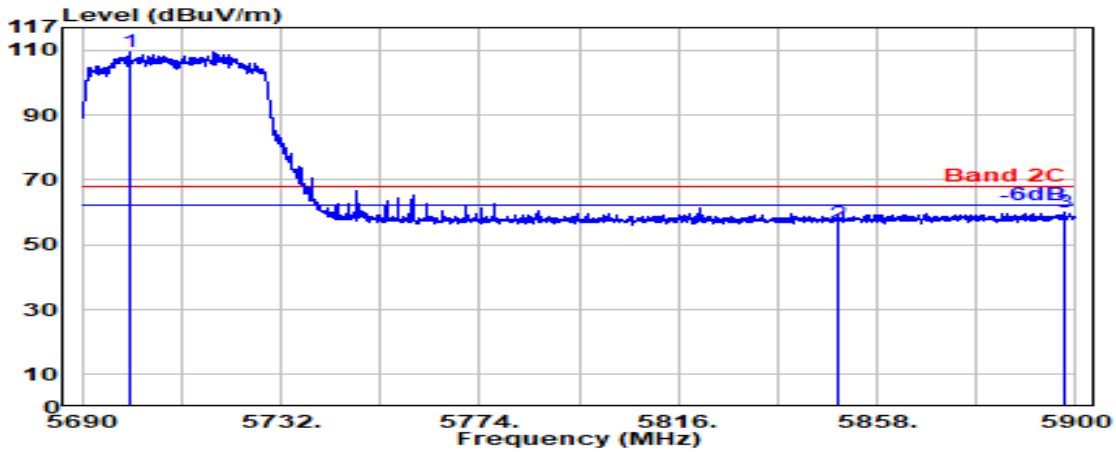


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.000	33.60	8.90	39.19	106.33	109.64	---	---	Peak
5850.000	33.90	9.04	39.22	52.77	56.48	68.20	11.72	Peak
5897.700	34.09	9.08	39.23	56.17	60.11	68.20	8.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

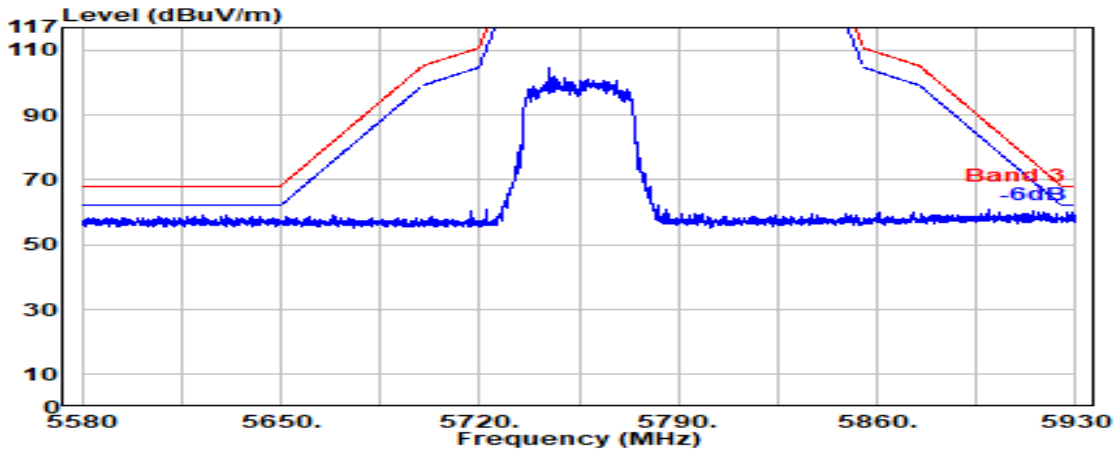


Antenna at Vertical Polarization

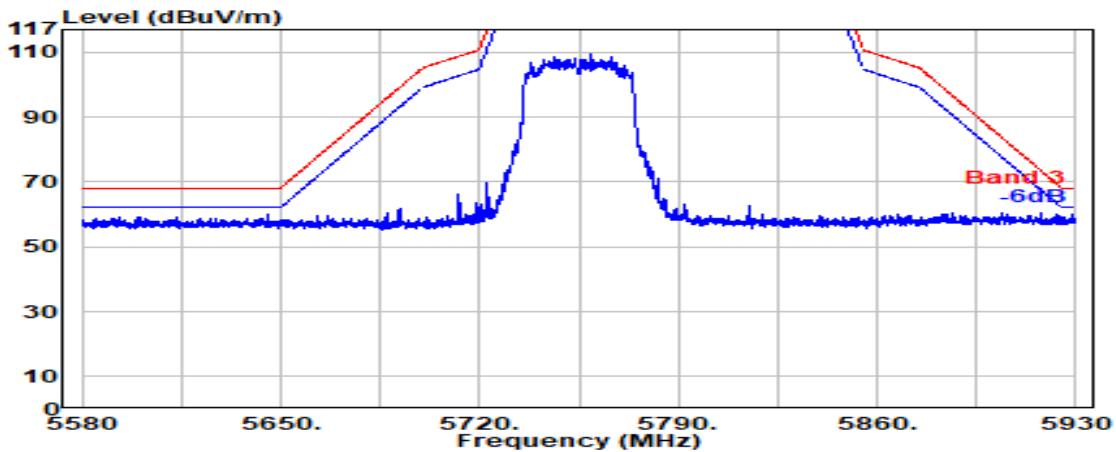


Mode	802.11be-EHT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

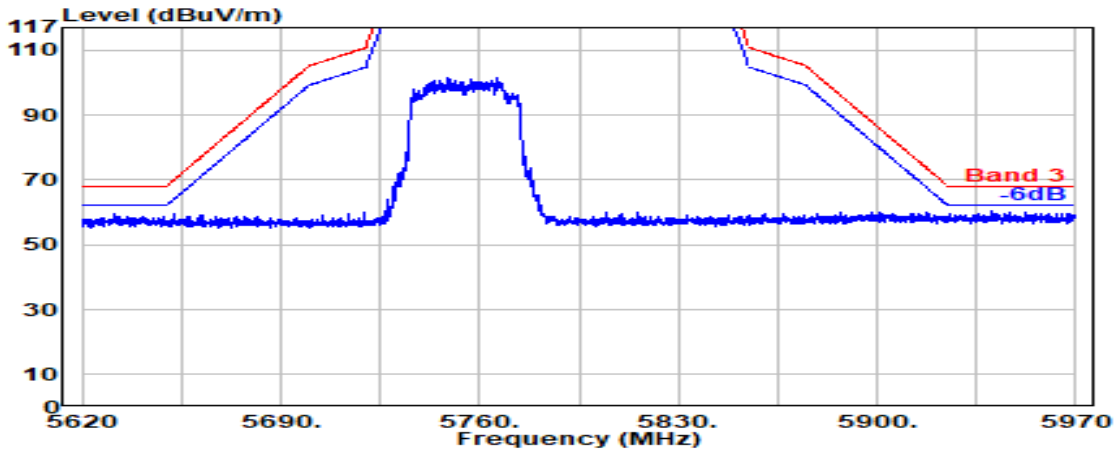

Antenna at Vertical Polarization

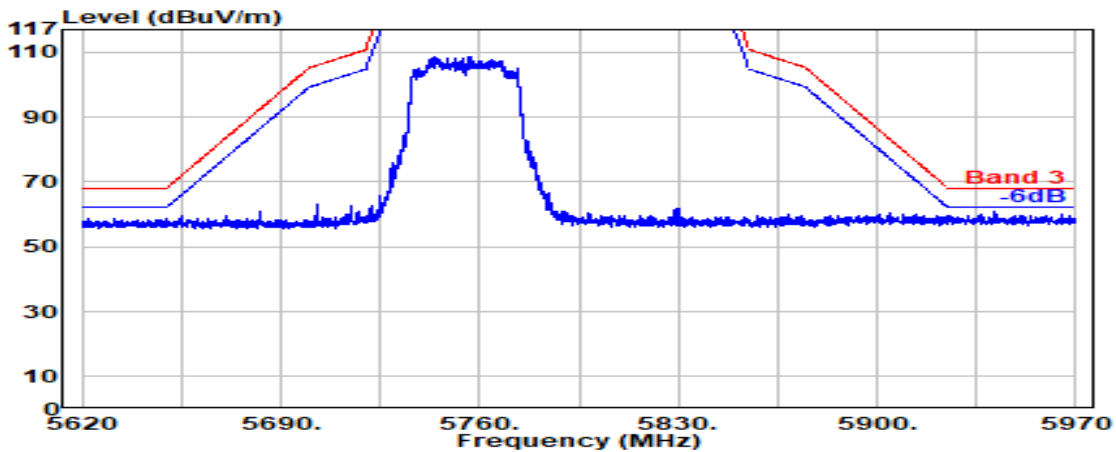


Mode	802.11be-EHT40	U-NII Band	4
		Frequency	TX 5875MHz

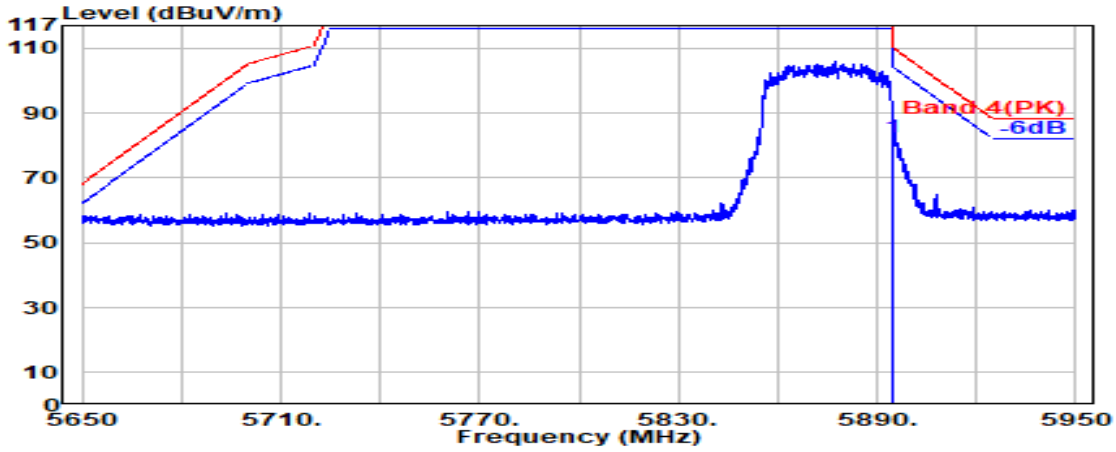

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	78.64	82.57	110.20	27.63	Peak

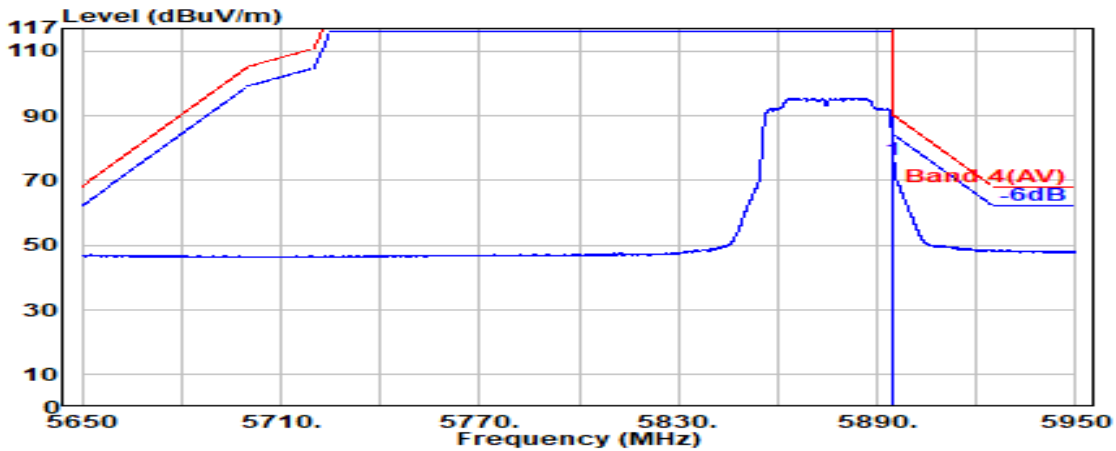


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	72.47	76.39	90.20	13.81	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT40	U-NII Band	4
		Frequency	TX 5875MHz

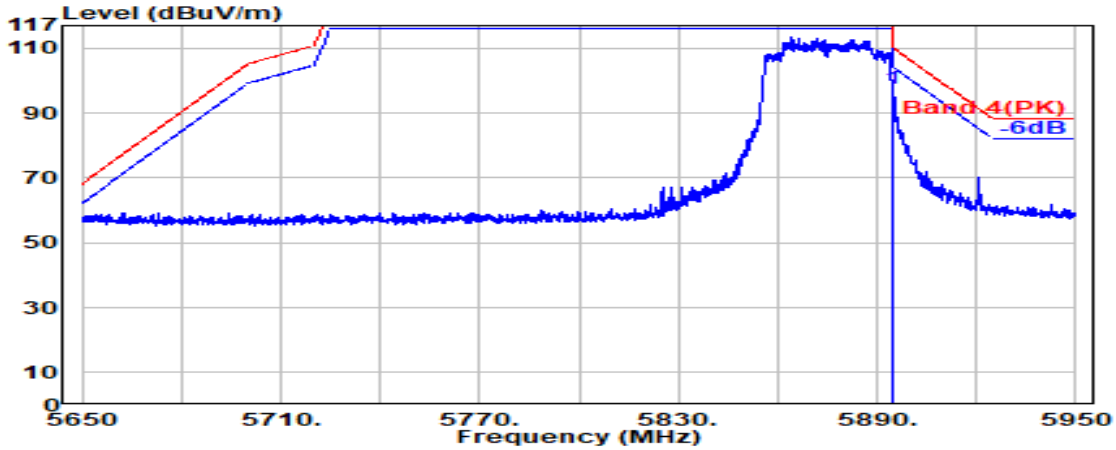

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	93.64	97.57	110.20	12.63	Peak

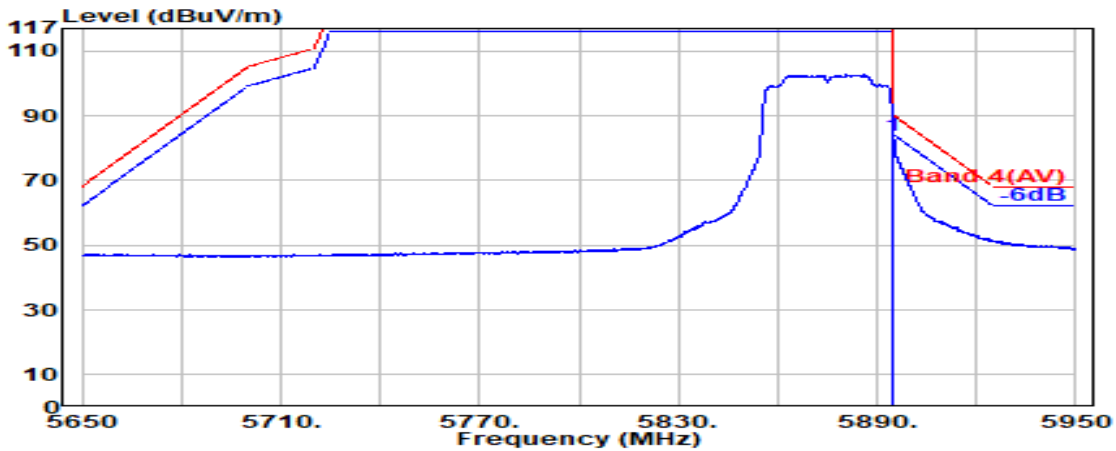


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.08	9.08	39.23	79.76	83.69	90.20	6.51	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

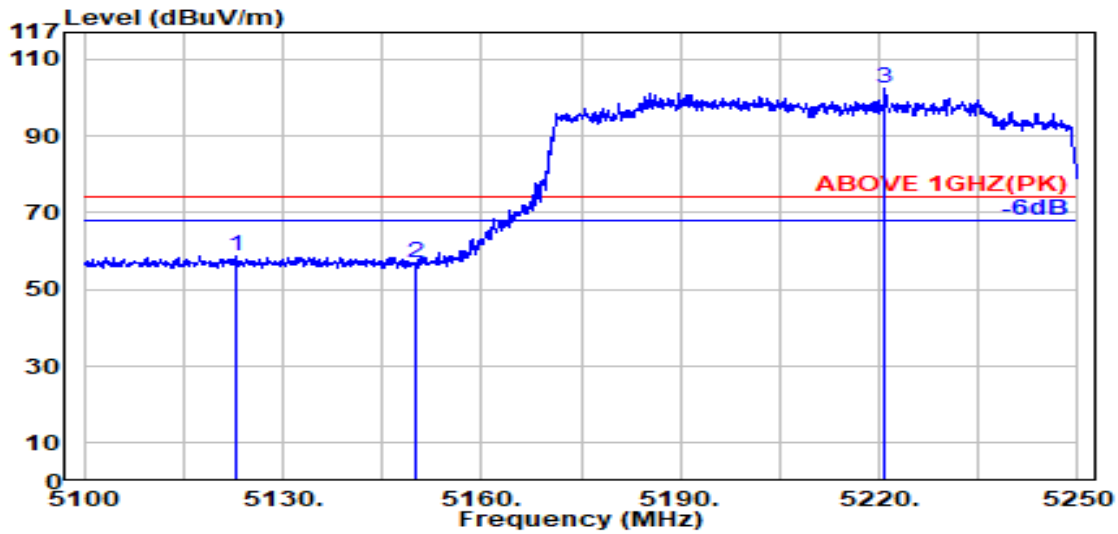

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.000	33.45	8.35	39.19	56.22	58.81	74.00	15.19	Peak
5150.000	33.50	8.37	39.19	54.41	57.10	74.00	16.90	Peak
@ 5220.900	33.76	8.45	39.18	99.62	102.64	---	---	Peak

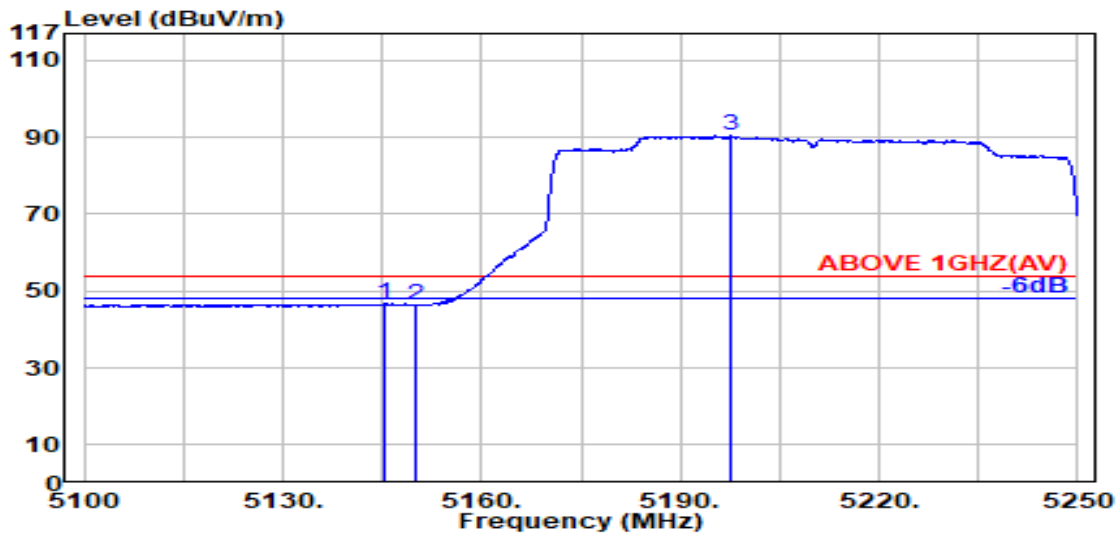


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	33.49	8.37	39.19	43.98	46.65	54.00	7.35	Average
5150.000	33.50	8.37	39.19	43.64	46.32	54.00	7.68	Average
@ 5197.500	33.79	8.42	39.19	87.32	90.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

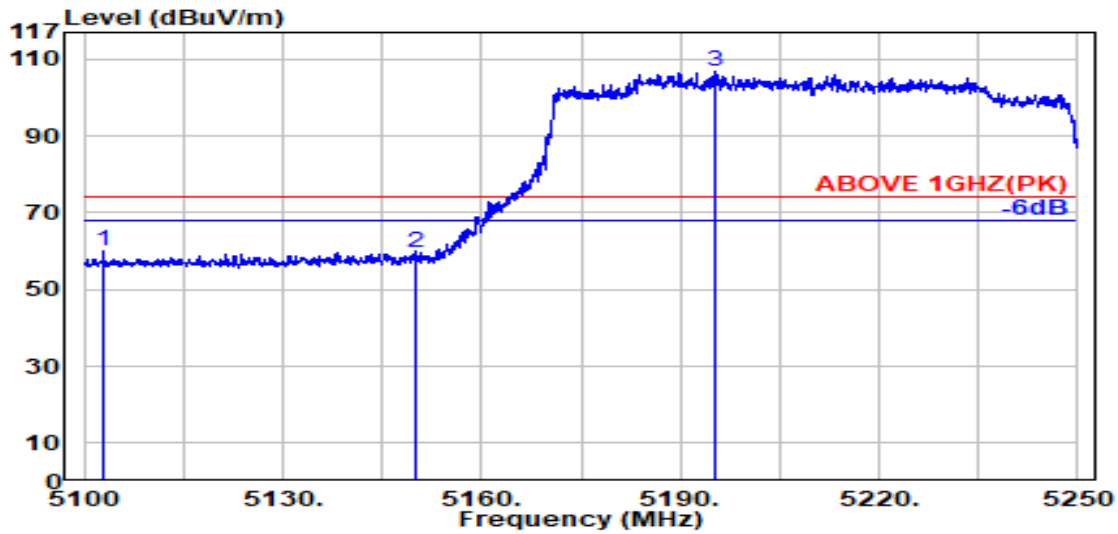

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.900	33.41	8.33	39.20	57.48	60.01	74.00	13.99	Peak
5150.000	33.50	8.37	39.19	56.76	59.44	74.00	14.56	Peak
@ 5195.300	33.77	8.42	39.19	103.95	106.96	---	---	Peak

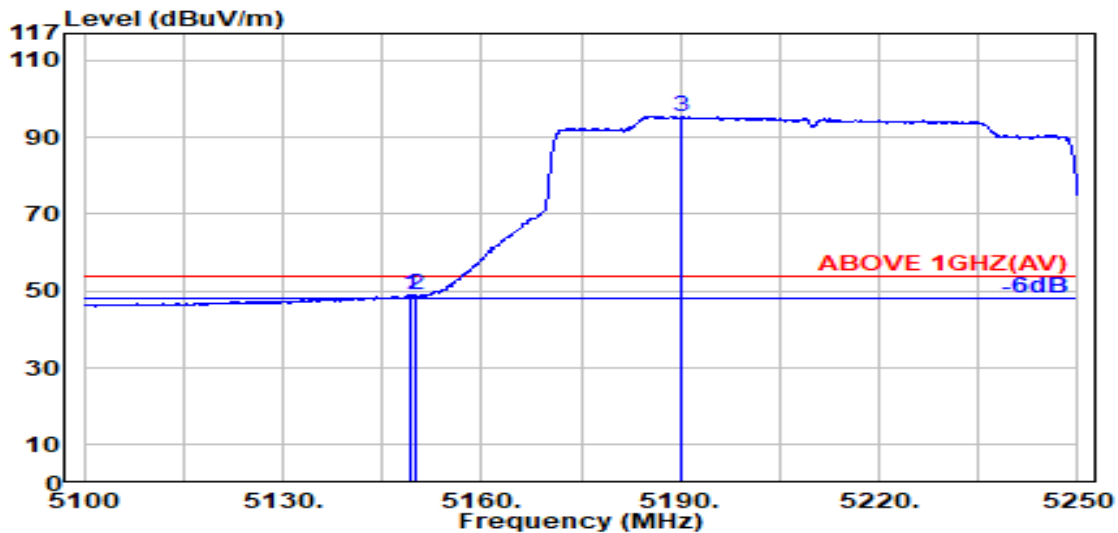


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	46.16	48.84	54.00	5.16	Average
5150.000	33.50	8.37	39.19	46.21	48.89	54.00	5.11	Average
@ 5190.200	33.74	8.41	39.19	92.51	95.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

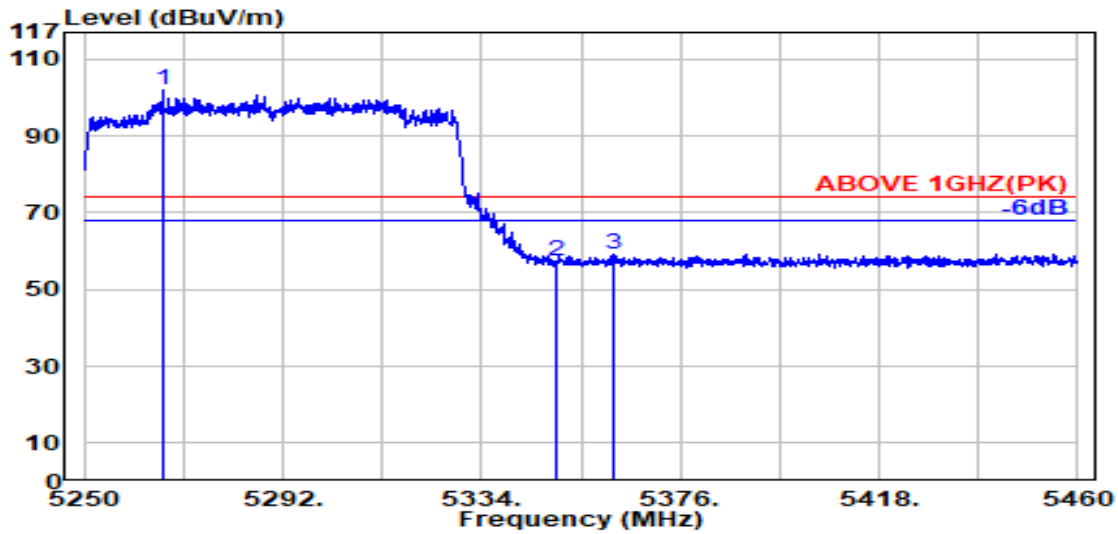

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.600	33.73	8.49	39.18	98.93	101.98	---	---	Peak
5350.000	33.70	8.57	39.17	54.16	57.27	74.00	16.73	Peak
5361.800	33.75	8.58	39.17	56.06	59.22	74.00	14.78	Peak

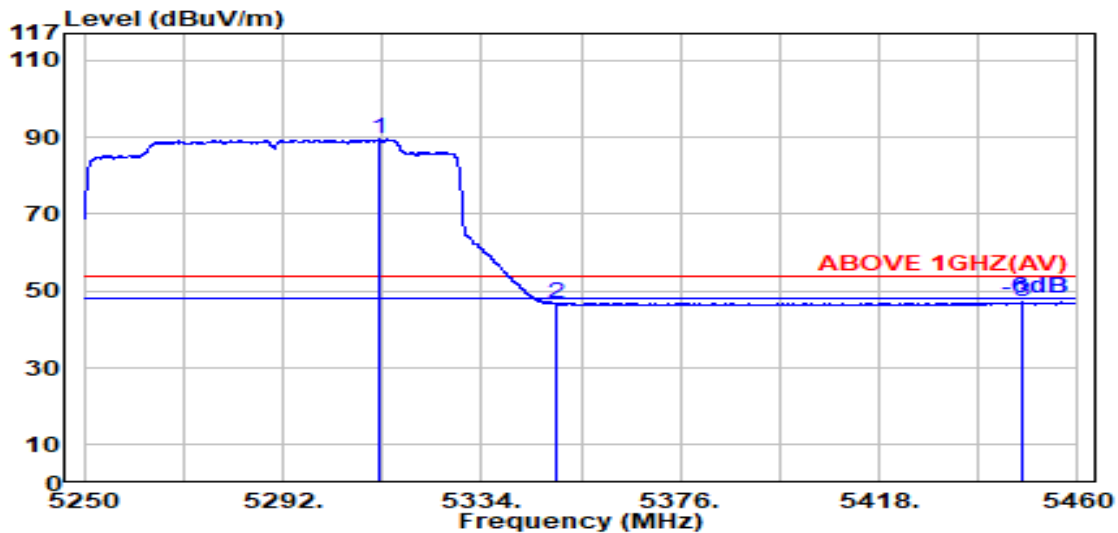


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.200	33.78	8.54	39.17	86.30	89.44	---	---	Average
5350.000	33.70	8.57	39.17	43.52	46.63	54.00	7.37	Average
5448.500	34.00	8.67	39.16	43.56	47.07	54.00	6.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

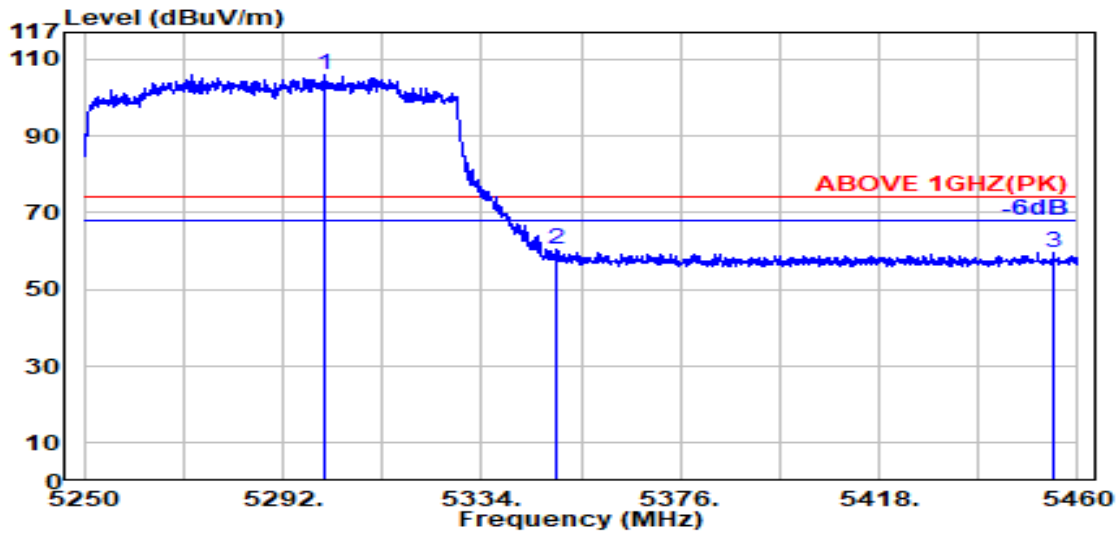

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.600	33.80	8.52	39.17	102.99	106.14	---	---	Peak
5350.000	33.70	8.57	39.17	57.30	60.41	74.00	13.59	Peak
5454.800	34.01	8.67	39.16	56.10	59.63	74.00	14.37	Peak

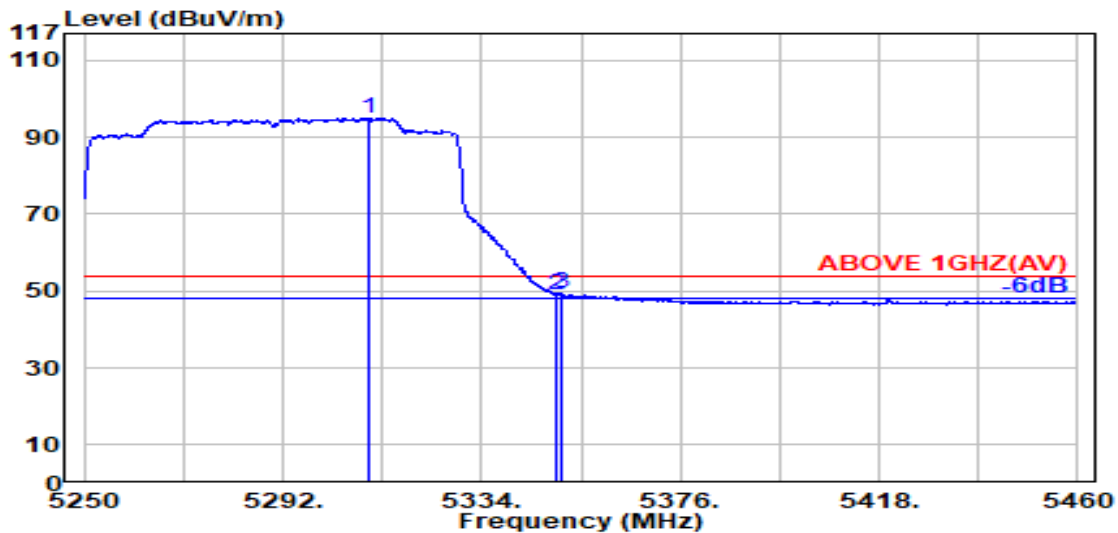


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.300	33.78	8.53	39.17	91.93	95.07	---	---	Average
5350.000	33.70	8.57	39.17	45.78	48.89	54.00	5.11	Average
5350.700	33.70	8.57	39.17	46.16	49.27	54.00	4.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

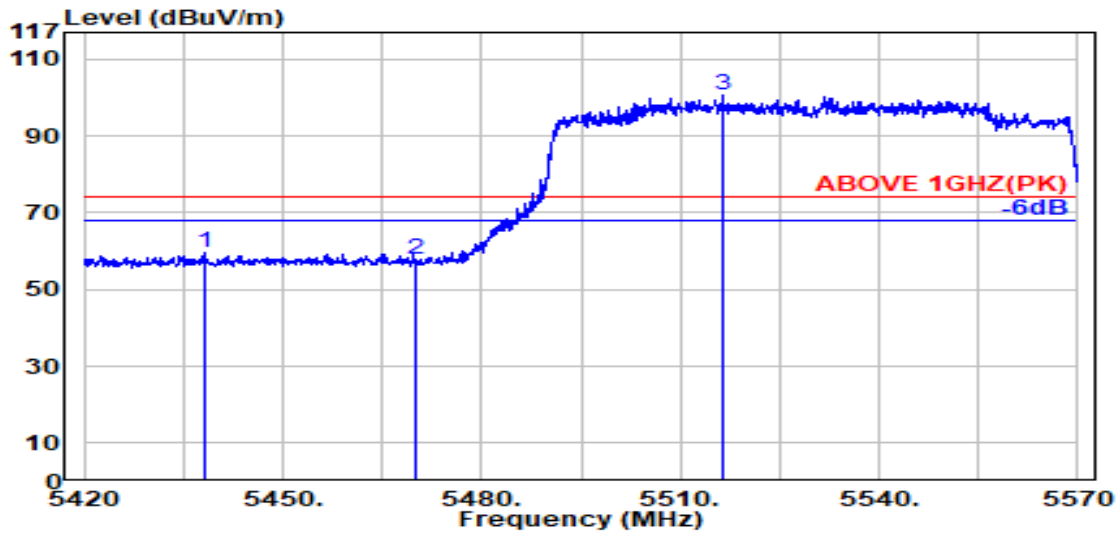

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.300	33.98	8.66	39.16	56.11	59.59	74.00	14.41	Peak
5470.000	34.04	8.69	39.15	54.31	57.88	74.00	16.12	Peak
@ 5516.500	34.07	8.73	39.15	96.81	100.46	---	---	Peak

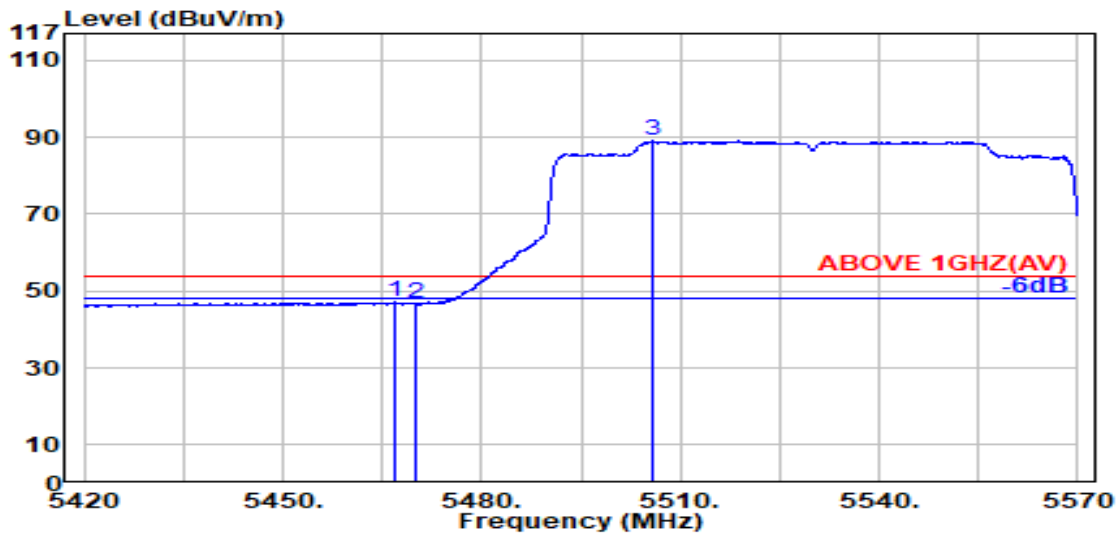


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.03	8.69	39.15	43.46	47.03	54.00	6.97	Average
5470.000	34.04	8.69	39.15	43.07	46.64	54.00	7.36	Average
@ 5505.700	34.09	8.72	39.15	85.37	89.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

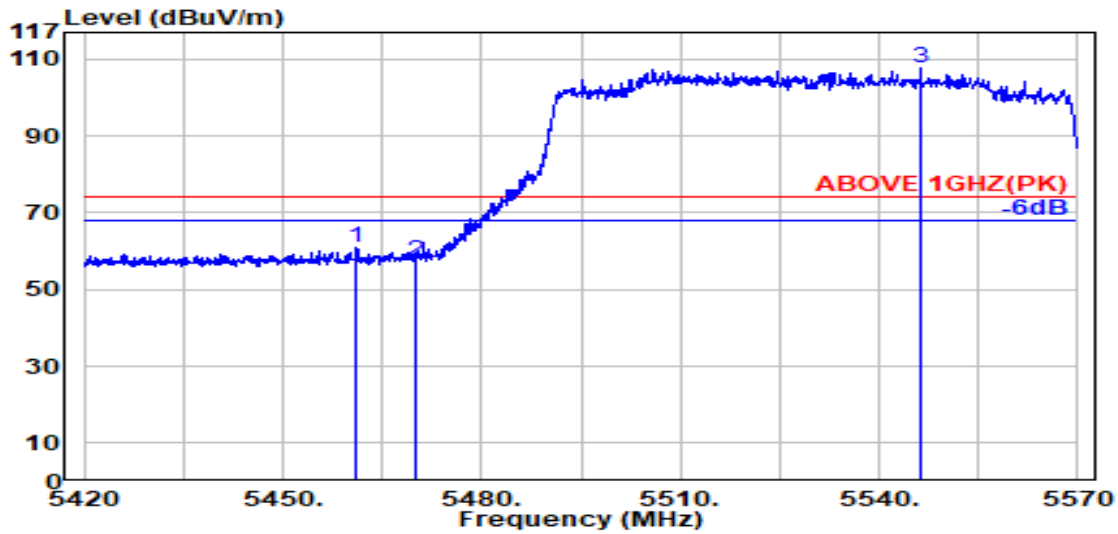

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.02	8.68	39.15	57.32	60.87	74.00	13.13	Peak
5470.000	34.04	8.69	39.15	53.97	57.55	74.00	16.45	Peak
@ 5546.200	34.01	8.76	39.16	104.15	107.76	---	---	Peak

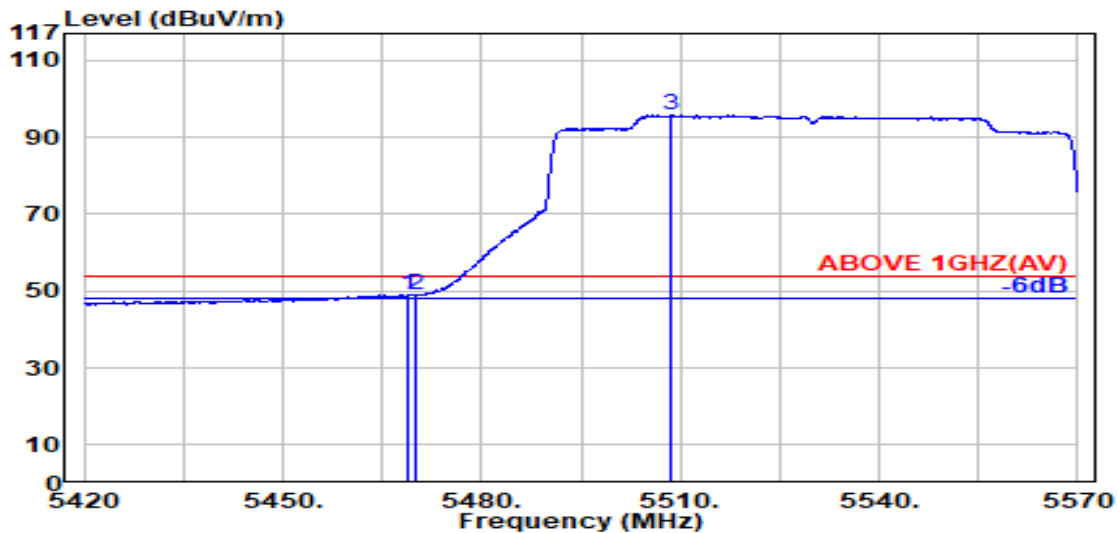


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	45.32	48.89	54.00	5.11	Average
5470.000	34.04	8.69	39.15	45.30	48.88	54.00	5.12	Average
@ 5508.500	34.08	8.72	39.15	92.07	95.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

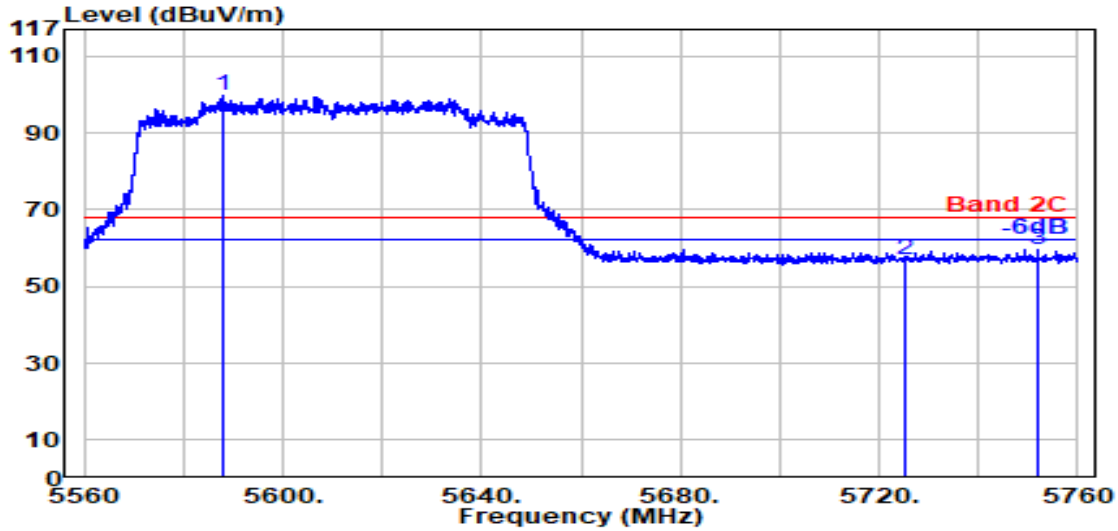

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5587.800	33.85	8.80	39.17	96.20	99.68	---	---	Peak
5725.000	33.60	8.93	39.20	53.79	57.12	68.20	11.08	Peak
5752.000	33.61	8.95	39.20	56.34	59.70	68.20	8.50	Peak

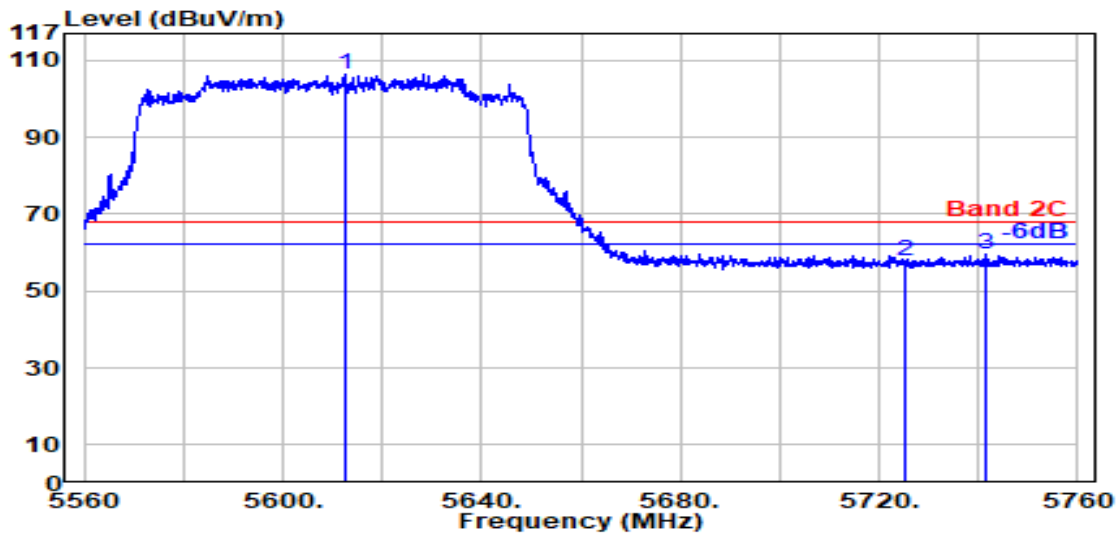


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5612.500	33.80	8.82	39.17	102.96	106.40	---	---	Peak
5725.000	33.60	8.93	39.20	54.29	57.62	68.20	10.58	Peak
5741.400	33.60	8.94	39.20	56.11	59.45	68.20	8.75	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

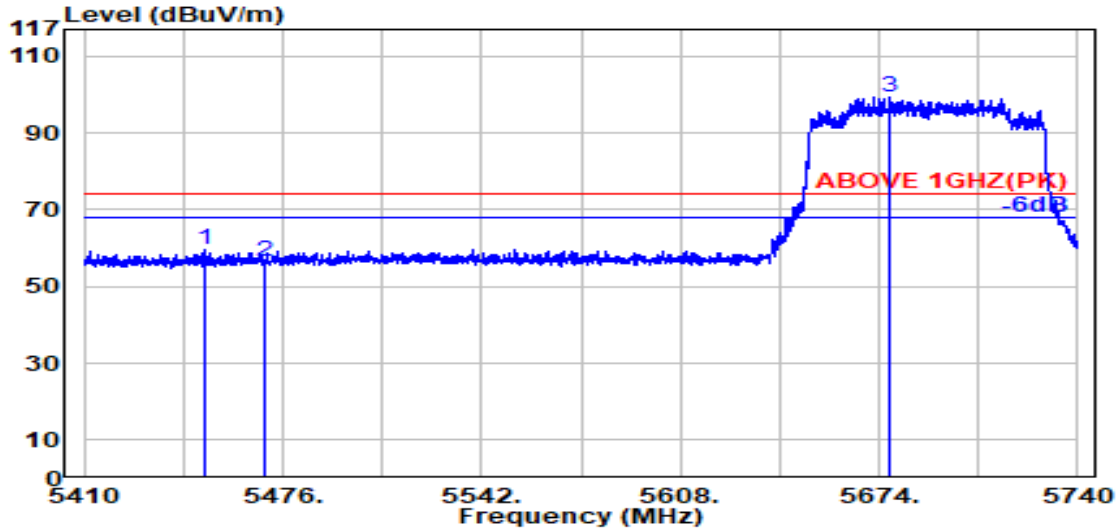

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.200	34.00	8.67	39.16	56.29	59.80	74.00	14.20	Peak
5470.000	34.04	8.69	39.15	53.01	56.58	74.00	17.42	Peak
@ 5677.700	33.69	8.88	39.19	95.83	99.21	---	---	Peak

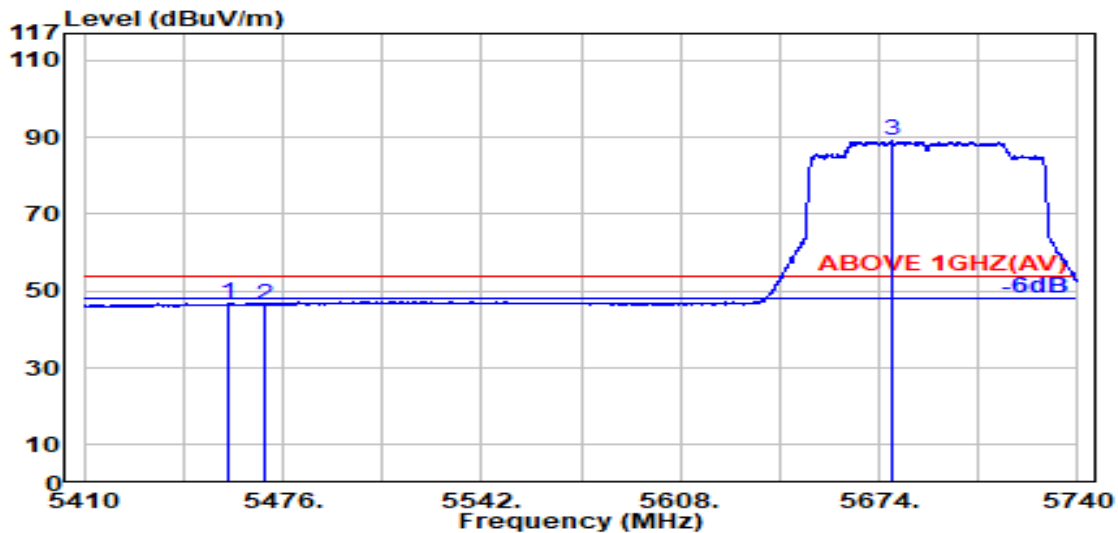


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.100	34.02	8.68	39.15	43.22	46.76	54.00	7.24	Average
5470.000	34.04	8.69	39.15	42.99	46.57	54.00	7.43	Average
@ 5678.600	33.69	8.88	39.19	85.63	89.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

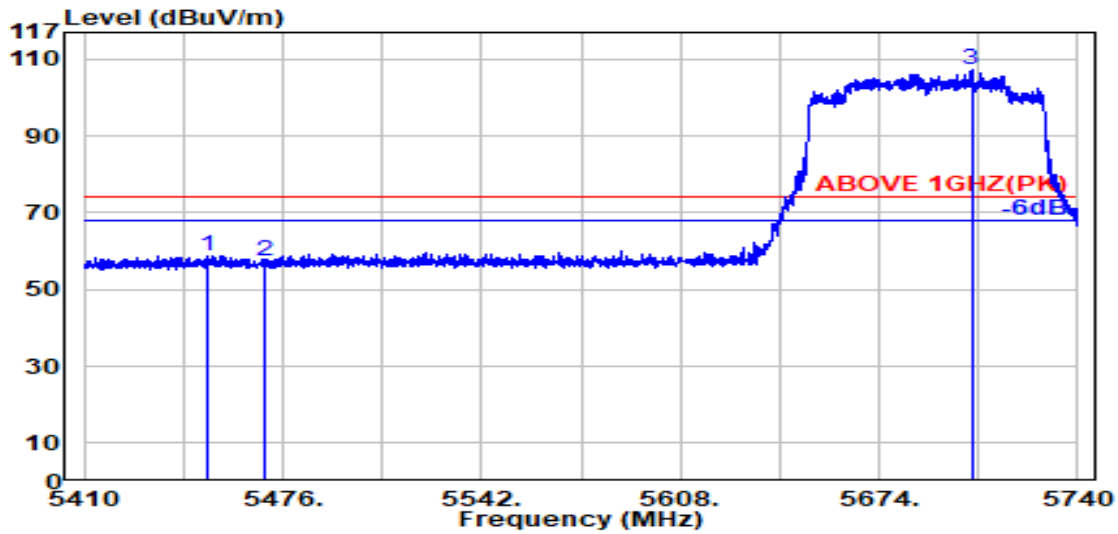

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.200	34.00	8.67	39.16	55.33	58.85	74.00	15.15	Peak
5470.000	34.04	8.69	39.15	54.00	57.57	74.00	16.43	Peak
@ 5704.700	33.60	8.91	39.19	103.79	107.10	---	---	Peak

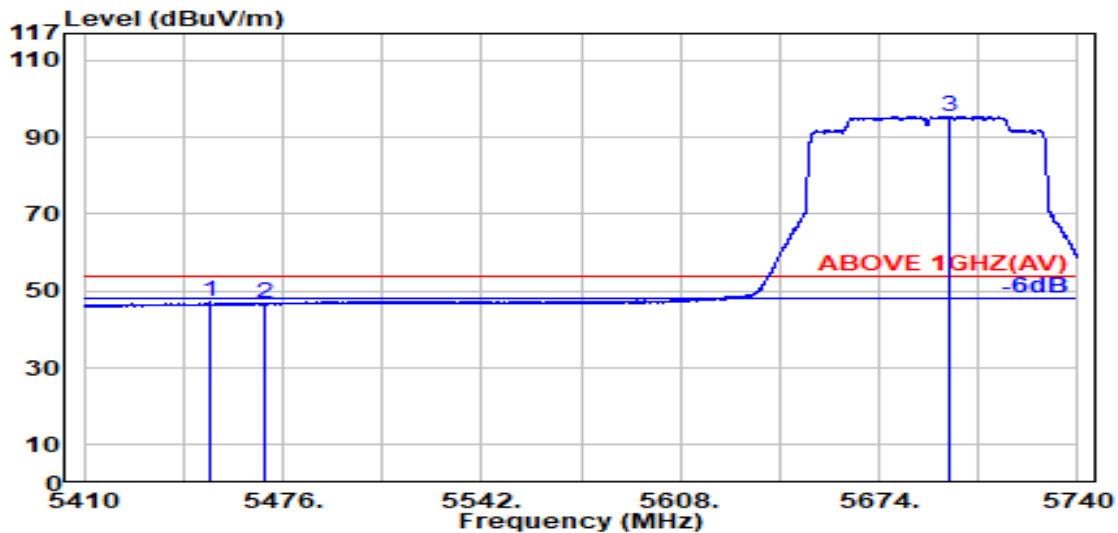


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.500	34.00	8.67	39.16	43.51	47.03	54.00	6.97	Average
5470.000	34.04	8.69	39.15	43.05	46.62	54.00	7.38	Average
@ 5697.400	33.61	8.90	39.19	92.13	95.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

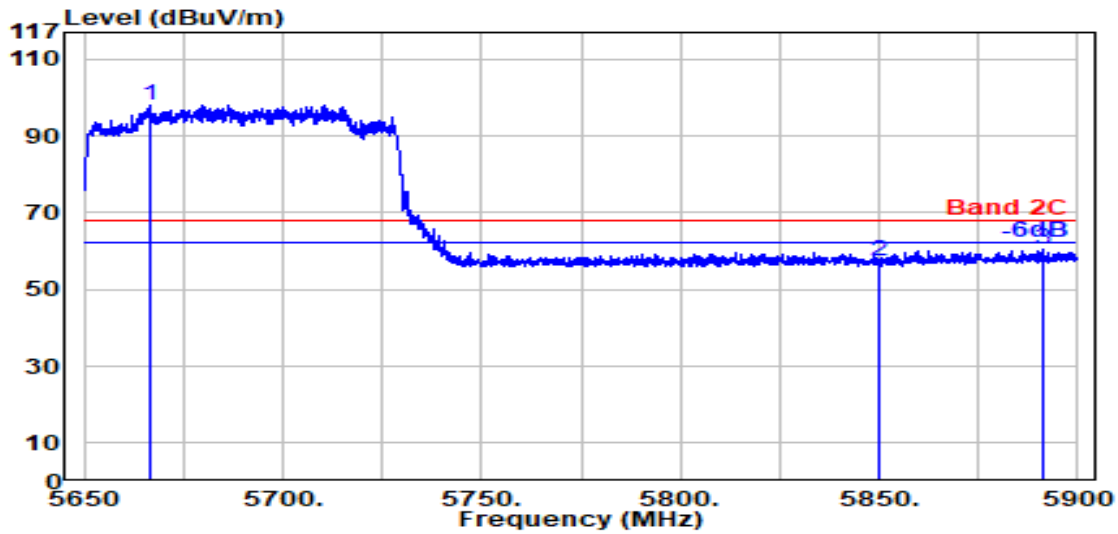

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5666.643	33.73	8.87	39.18	94.69	98.11	---	---	Peak
5850.000	33.90	9.04	39.22	53.70	57.42	68.20	10.78	Peak
5891.286	34.07	9.07	39.23	56.66	60.57	68.20	7.63	Peak

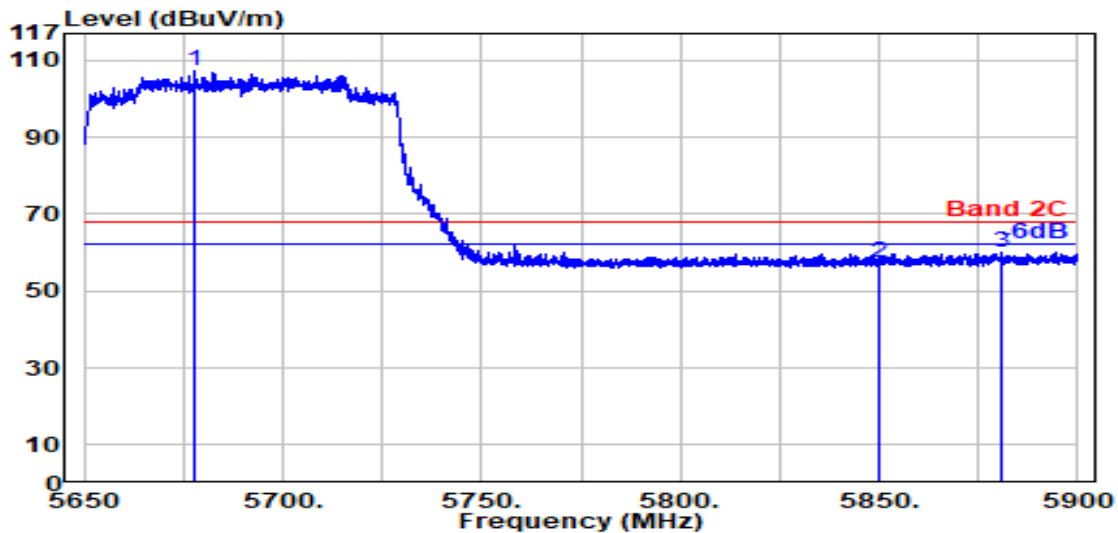


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.786	33.69	8.88	39.19	103.73	107.11	---	---	Peak
5850.000	33.90	9.04	39.22	53.80	57.52	68.20	10.68	Peak
5881.000	34.02	9.07	39.23	56.40	60.26	68.20	7.94	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

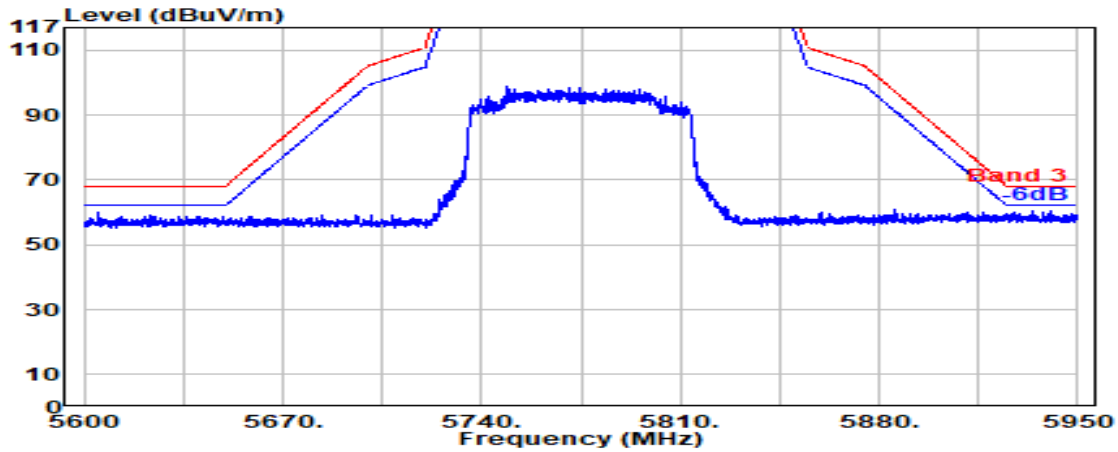

Antenna at Vertical Polarization

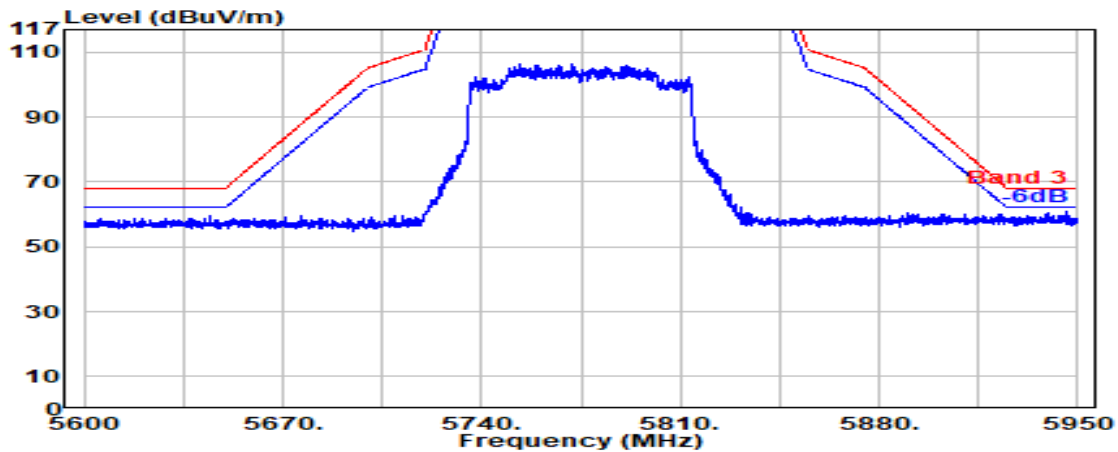


Mode	802.11be-EHT80	U-NII Band	4
		Frequency	TX 5855MHz

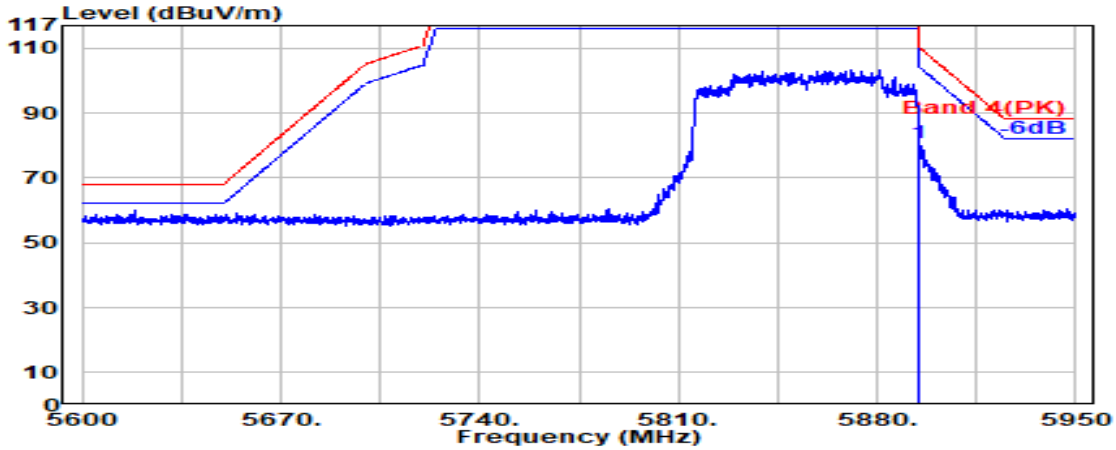

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	76.69	80.62	110.16	29.54	Peak

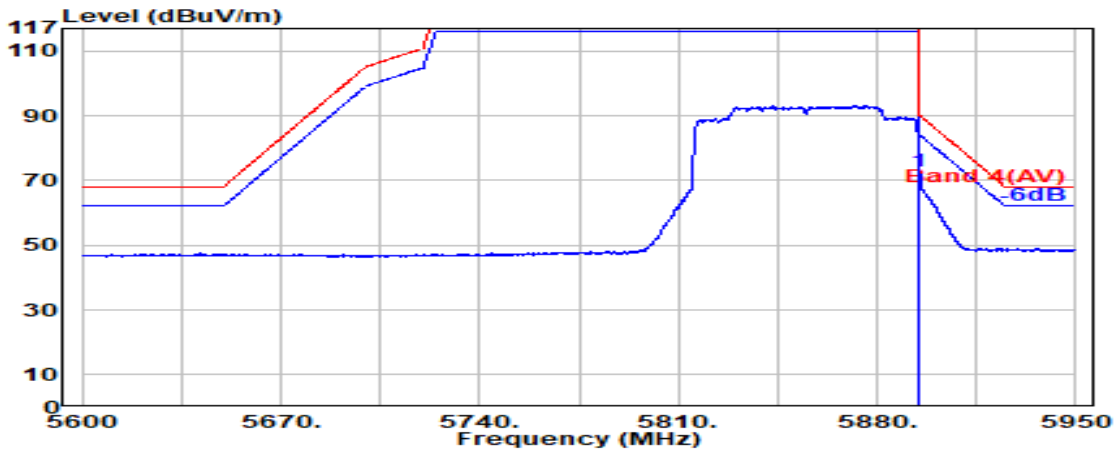


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	68.82	72.75	90.16	17.41	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT80	U-NII Band	4
		Frequency	TX 5855MHz

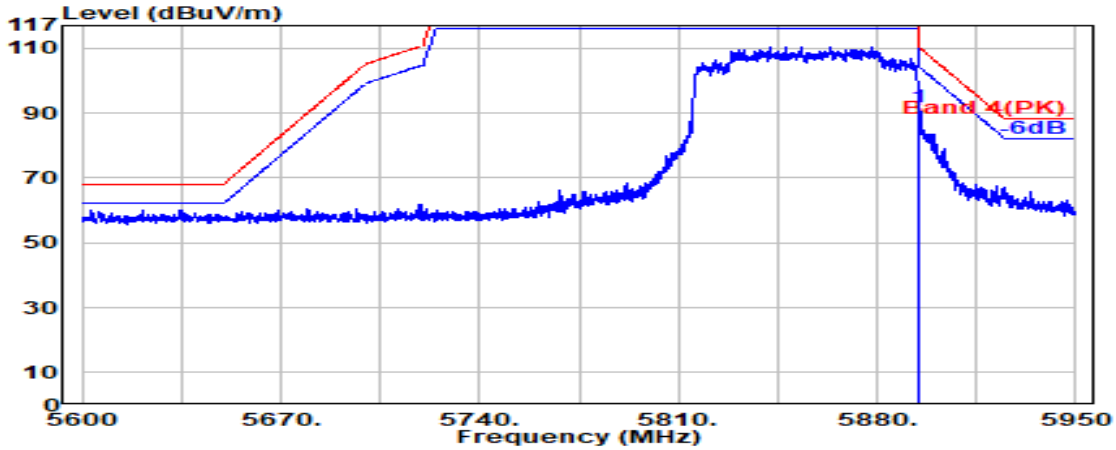

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	87.90	91.83	110.16	18.33	Peak

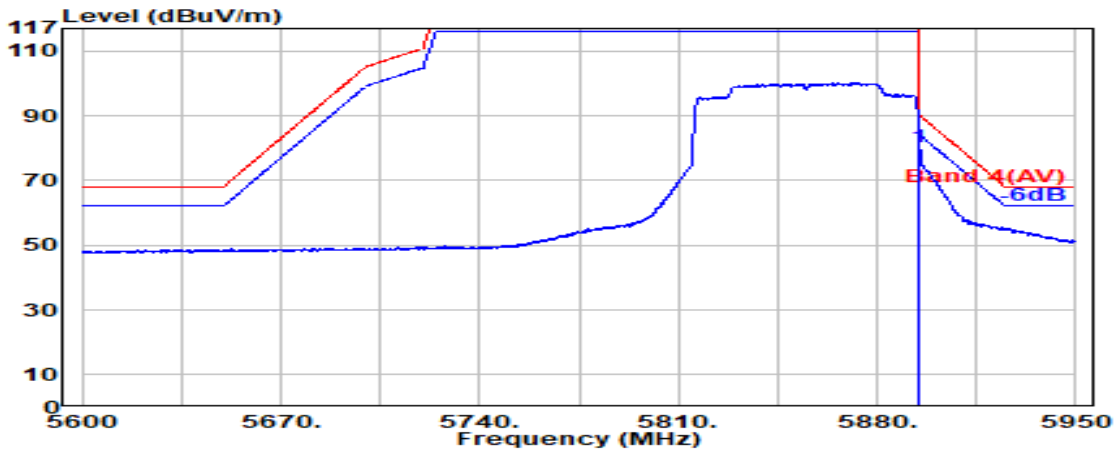


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	76.37	80.30	90.16	9.86	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

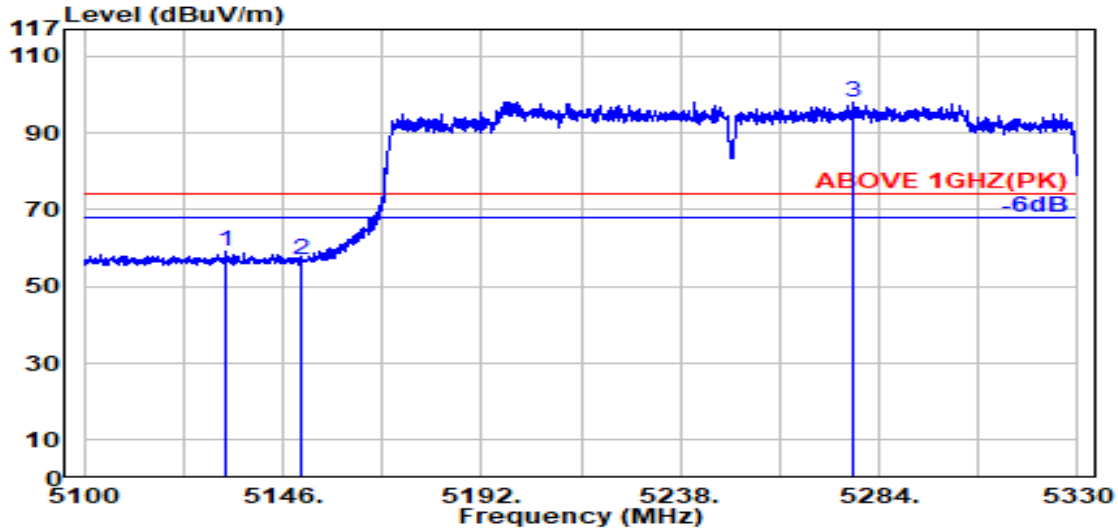

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.000	33.47	8.36	39.19	56.52	59.15	74.00	14.85	Peak
5150.000	33.50	8.37	39.19	54.22	56.90	74.00	17.10	Peak
@ 5278.200	33.76	8.50	39.18	95.07	98.15	---	---	Peak

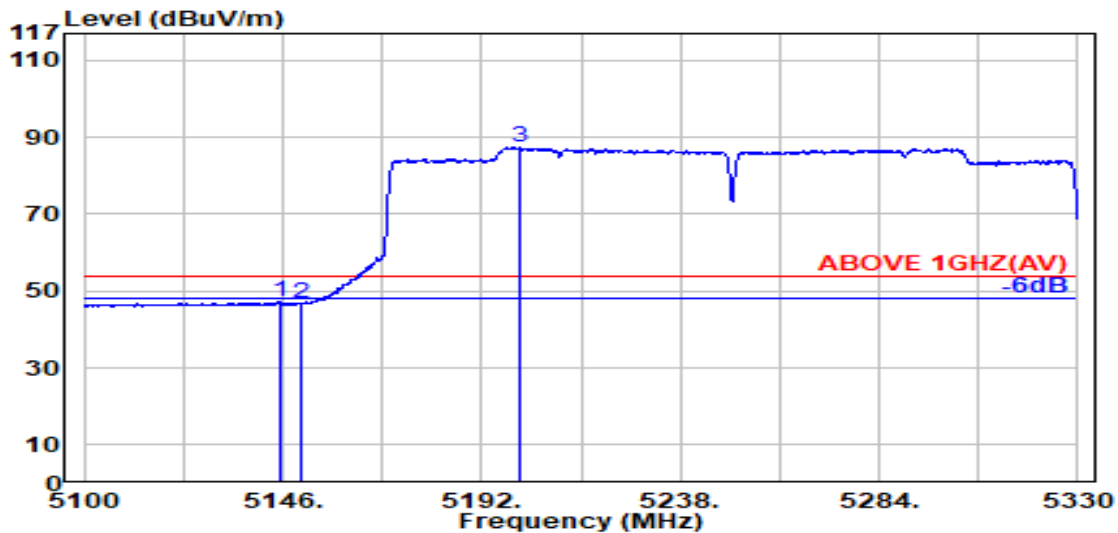


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.200	33.49	8.37	39.19	44.44	47.11	54.00	6.89	Average
5150.000	33.50	8.37	39.19	44.07	46.75	54.00	7.25	Average
@ 5201.000	33.80	8.43	39.19	84.44	87.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

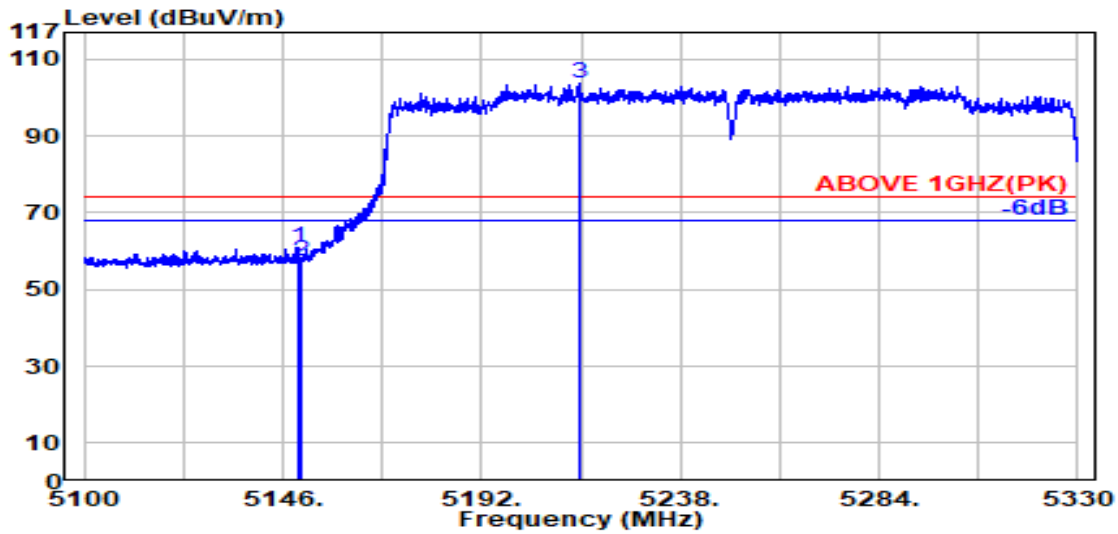

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.50	8.37	39.19	58.36	61.04	74.00	12.96	Peak
5150.000	33.50	8.37	39.19	54.88	57.56	74.00	16.44	Peak
@ 5214.700	33.77	8.44	39.18	100.77	103.79	---	---	Peak

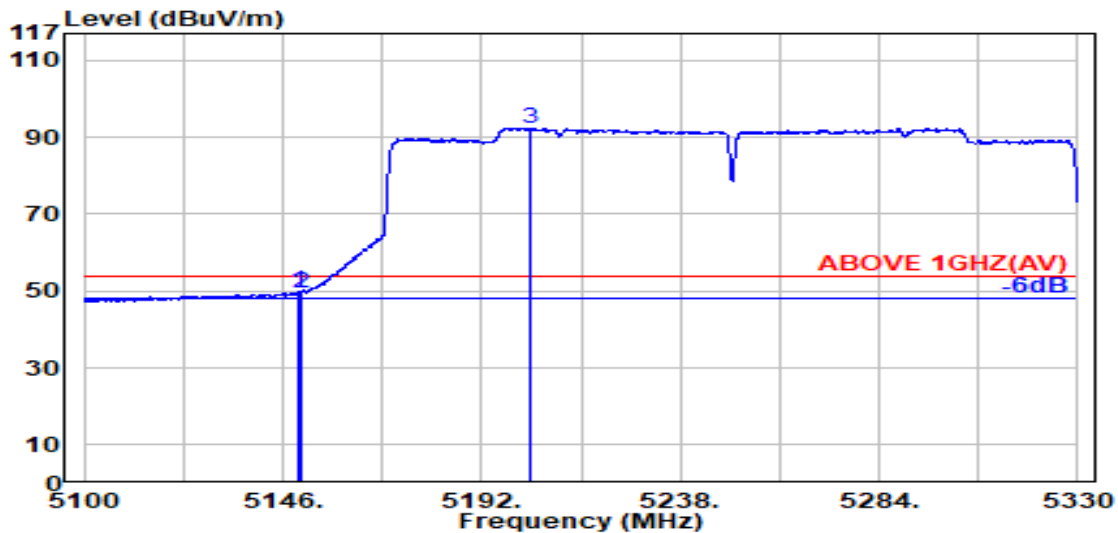


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.700	33.50	8.37	39.19	47.00	49.69	54.00	4.31	Average
5150.000	33.50	8.37	39.19	46.65	49.33	54.00	4.67	Average
@ 5203.000	33.79	8.43	39.18	89.40	92.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

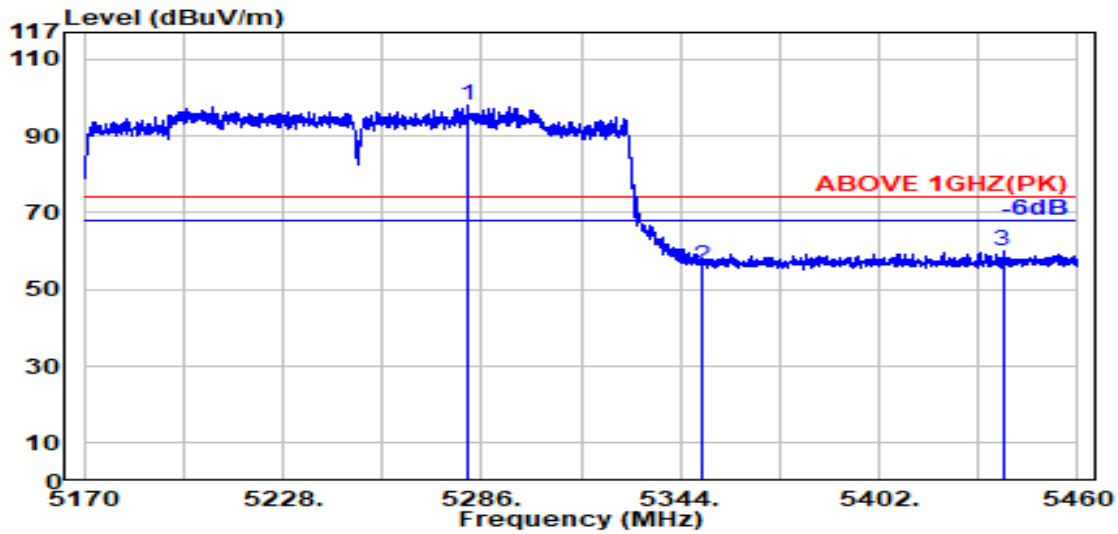

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.200	33.76	8.51	39.18	94.82	97.92	---	---	Peak
5350.000	33.70	8.57	39.17	53.01	56.11	74.00	17.89	Peak
5438.100	33.98	8.66	39.16	56.51	59.99	74.00	14.01	Peak

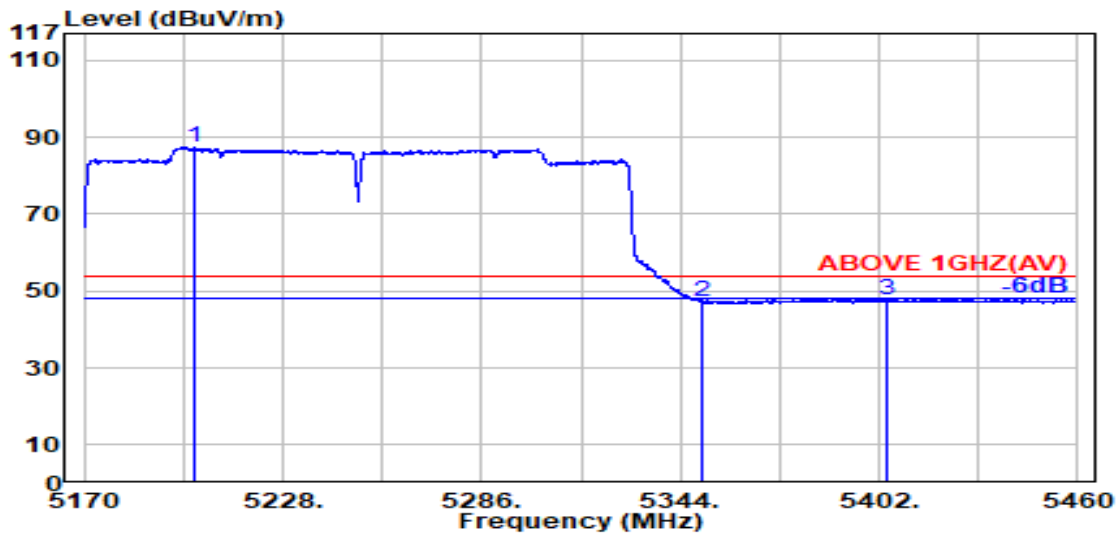


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5202.400	33.80	8.43	39.19	84.33	87.37	---	---	Average
5350.000	33.70	8.57	39.17	44.03	47.13	54.00	6.87	Average
5404.600	33.91	8.63	39.16	44.50	47.87	54.00	6.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

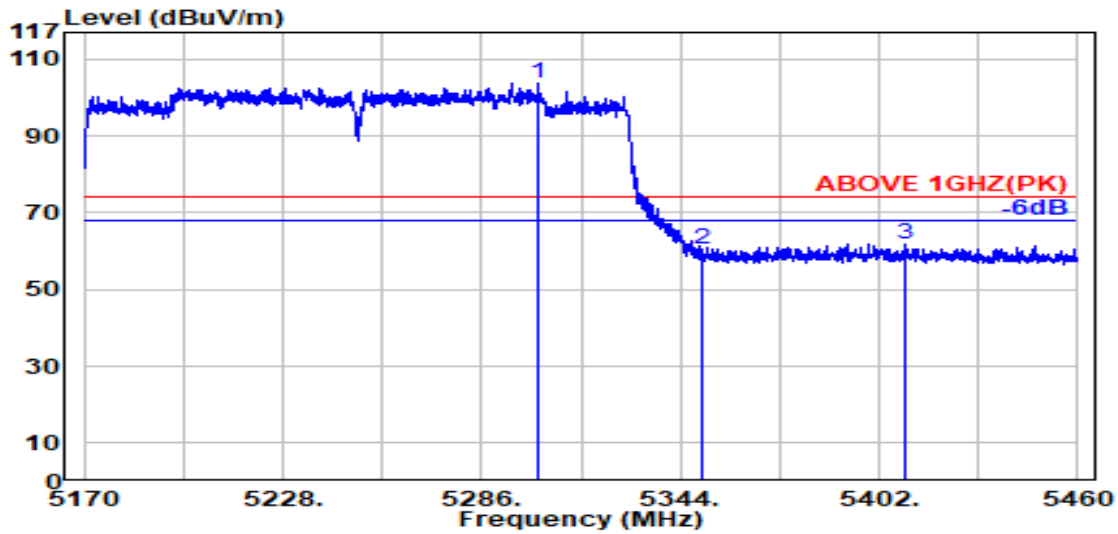

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.500	33.79	8.53	39.17	100.52	103.67	---	---	Peak
5350.000	33.70	8.57	39.17	57.25	60.36	74.00	13.64	Peak
5409.300	33.92	8.63	39.16	58.59	61.97	74.00	12.03	Peak

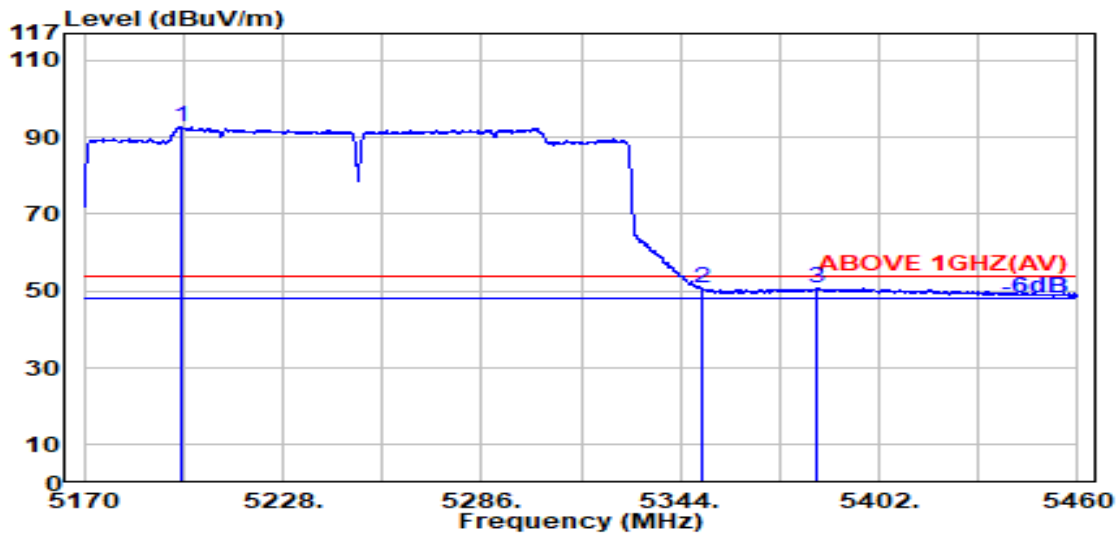


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5198.100	33.79	8.42	39.19	89.59	92.62	---	---	Average
5350.000	33.70	8.57	39.17	47.59	50.70	54.00	3.30	Average
5383.900	33.84	8.61	39.16	47.57	50.85	54.00	3.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

ode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

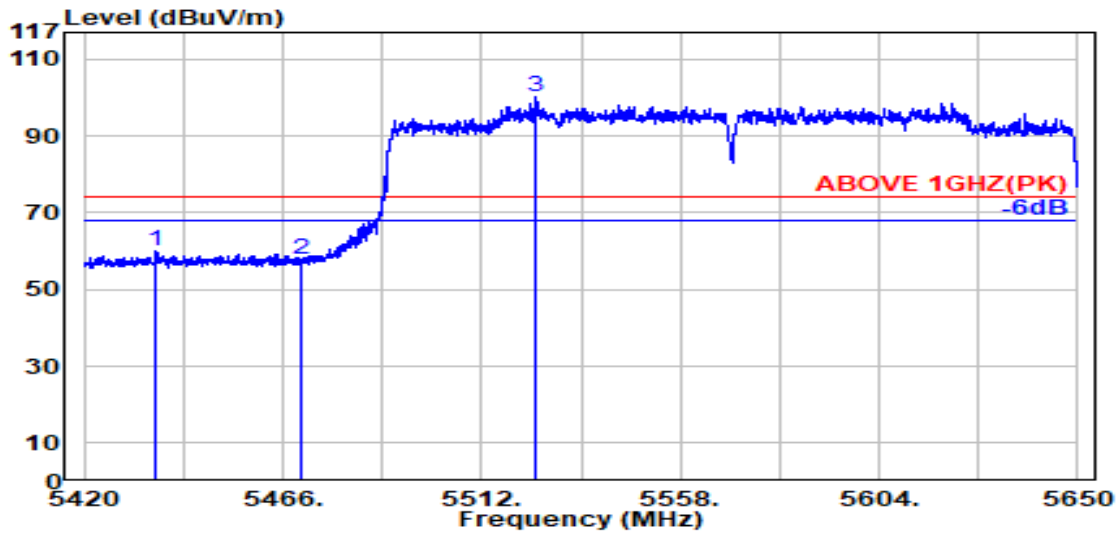

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.700	33.97	8.66	39.16	56.49	59.96	74.00	14.04	Peak
5470.000	34.04	8.69	39.15	54.06	57.63	74.00	16.37	Peak
@ 5524.700	34.05	8.74	39.16	96.44	100.08	---	---	Peak

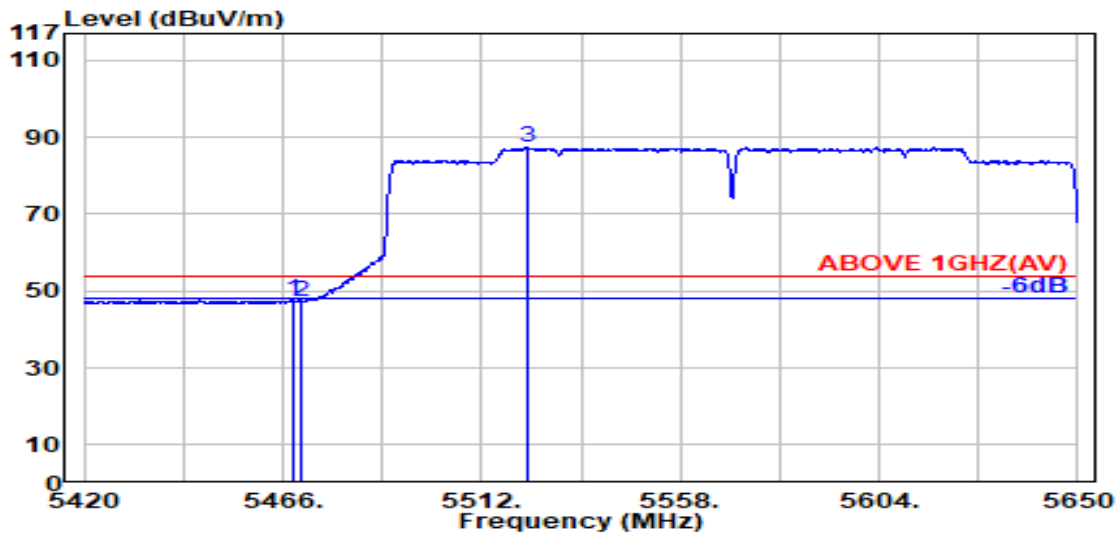


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	44.06	47.63	54.00	6.37	Average
5470.000	34.04	8.69	39.15	43.59	47.16	54.00	6.84	Average
@ 5522.400	34.06	8.74	39.15	83.83	87.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

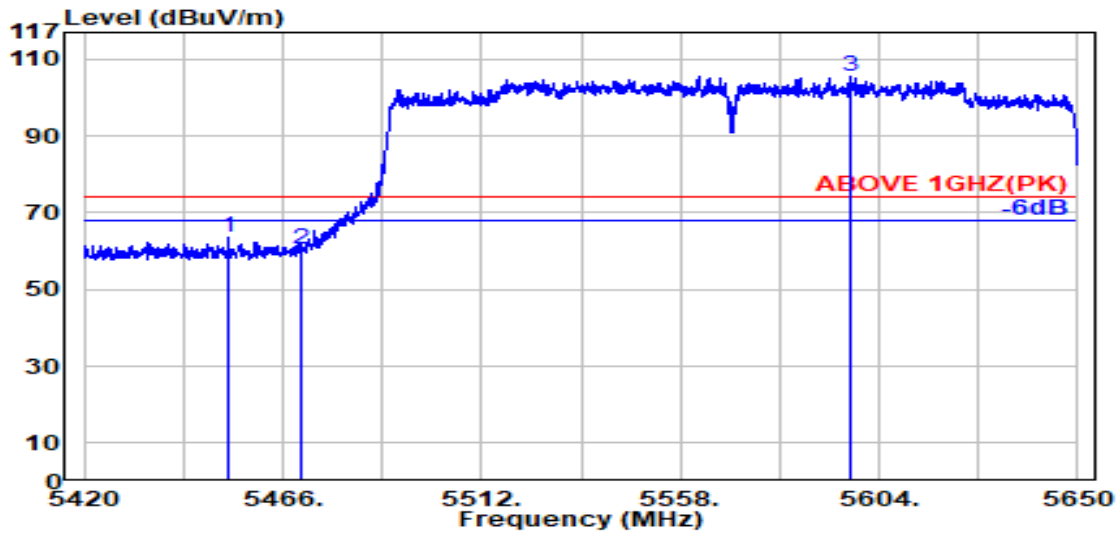

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.300	34.01	8.67	39.16	59.90	63.42	74.00	10.58	Peak
5470.000	34.04	8.69	39.15	57.09	60.67	74.00	13.33	Peak
@ 5597.100	33.81	8.81	39.17	101.96	105.41	---	---	Peak

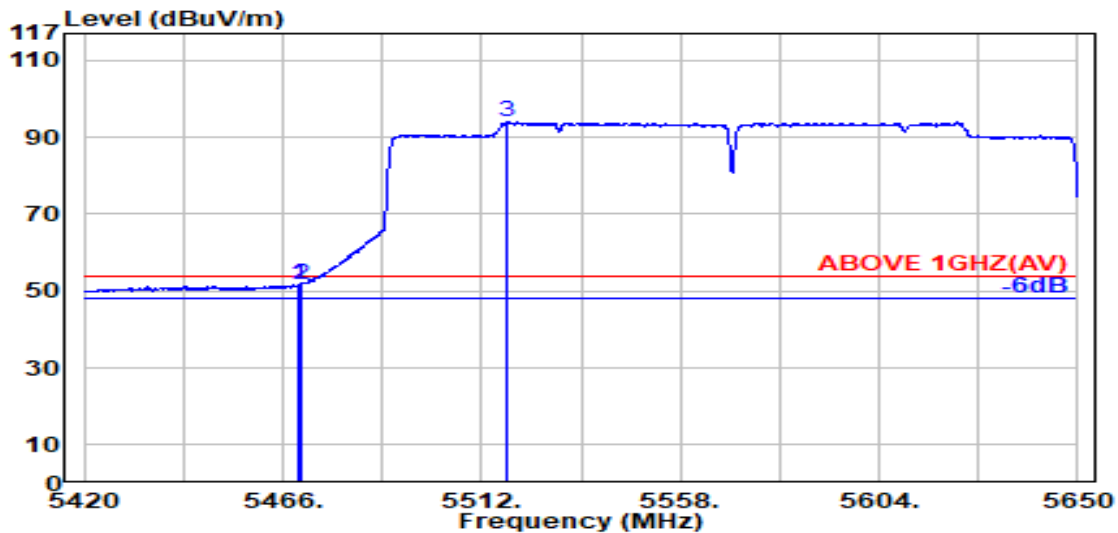


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.04	8.69	39.15	48.08	51.65	54.00	2.35	Average
5470.000	34.04	8.69	39.15	48.29	51.87	54.00	2.13	Average
@ 5518.000	34.06	8.73	39.15	90.40	94.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

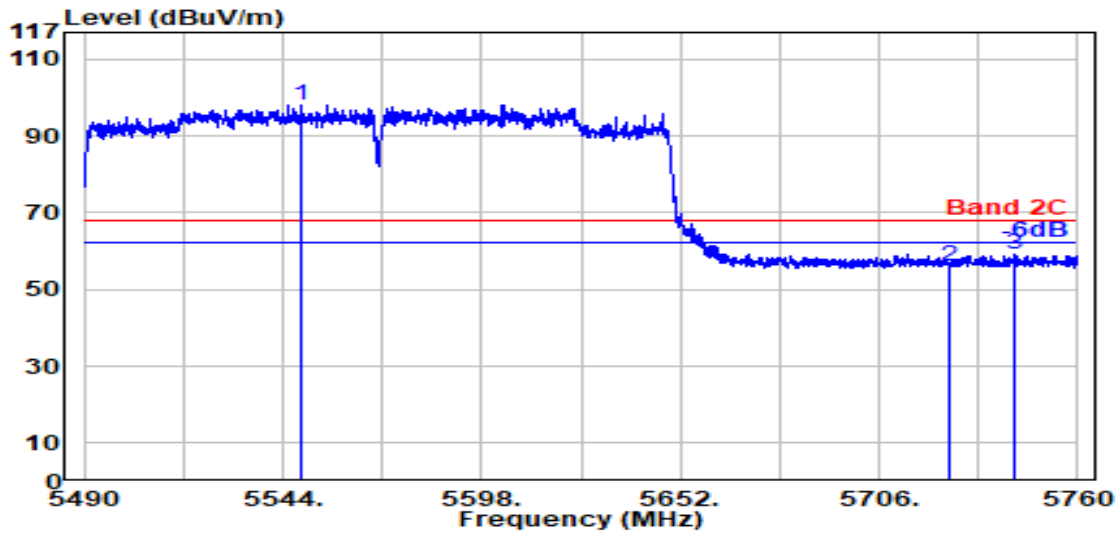

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5549.000	34.00	8.76	39.16	94.33	97.93	---	---	Peak
5725.000	33.60	8.93	39.20	52.91	56.24	68.20	11.96	Peak
5742.900	33.60	8.94	39.20	55.70	59.04	68.20	9.16	Peak

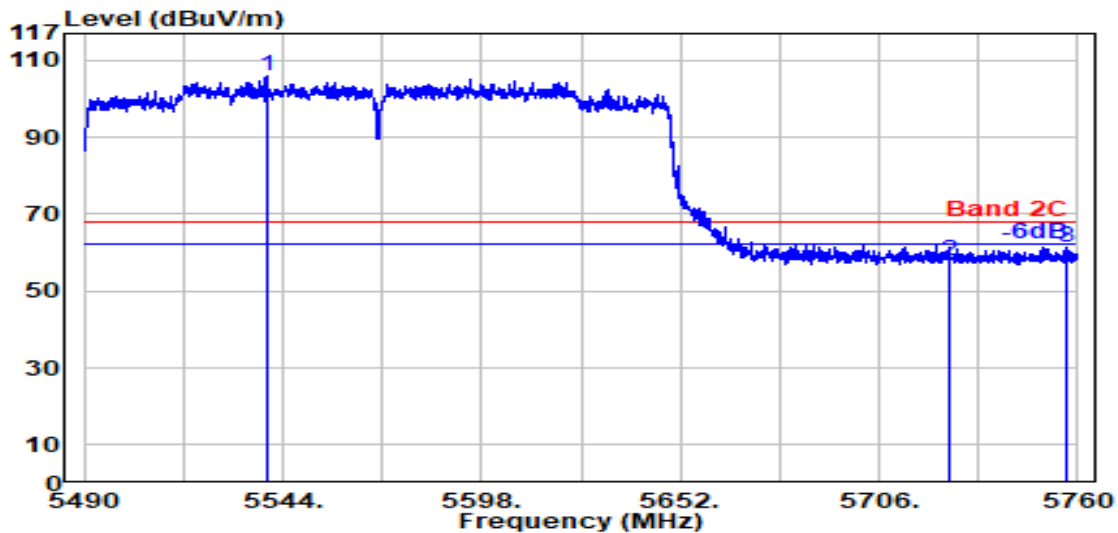


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5539.500	34.02	8.75	39.16	102.38	106.00	---	---	Peak
5725.000	33.60	8.93	39.20	54.70	58.03	68.20	10.17	Peak
5757.200	33.63	8.95	39.20	57.86	61.24	68.20	6.96	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	4
		Frequency	TX 5815MHz

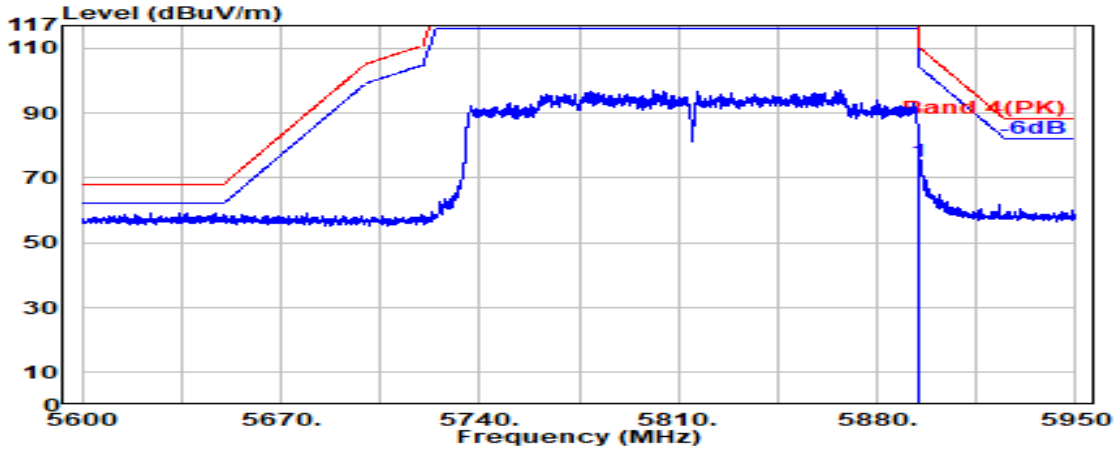

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	71.26	75.19	110.16	34.97	Peak

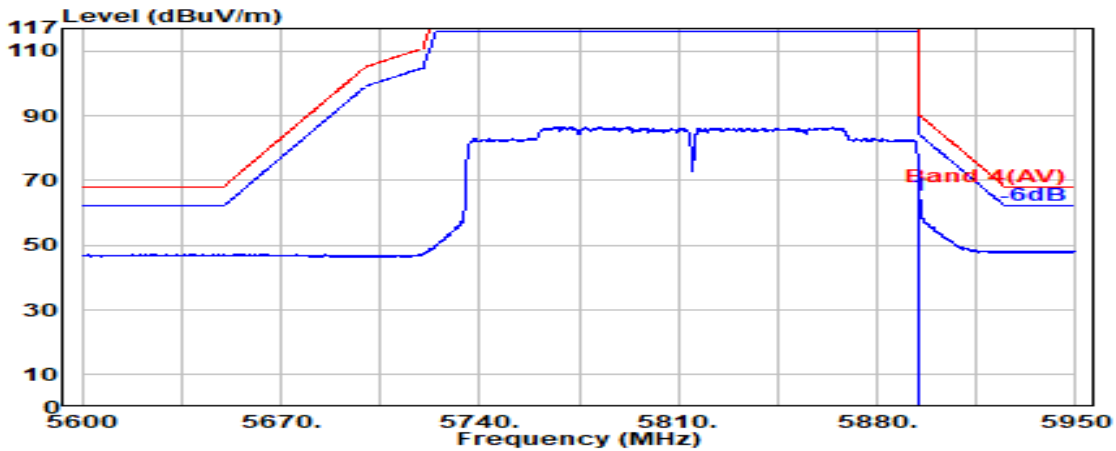


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	61.44	65.36	90.16	24.80	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11be-EHT160	U-NII Band	4
		Frequency	TX 5815MHz

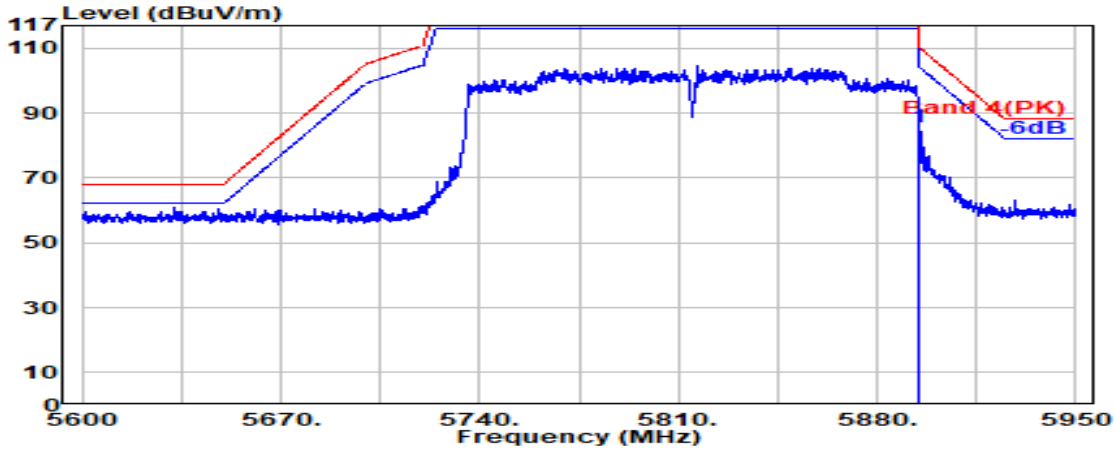

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	81.52	85.45	110.16	24.71	Peak

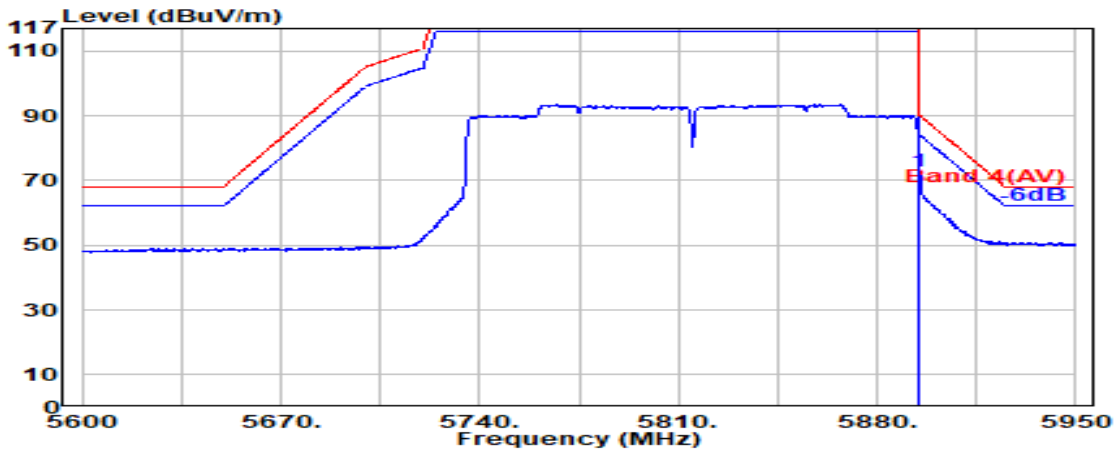


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.08	9.08	39.23	68.90	72.83	90.16	17.33	Average


Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

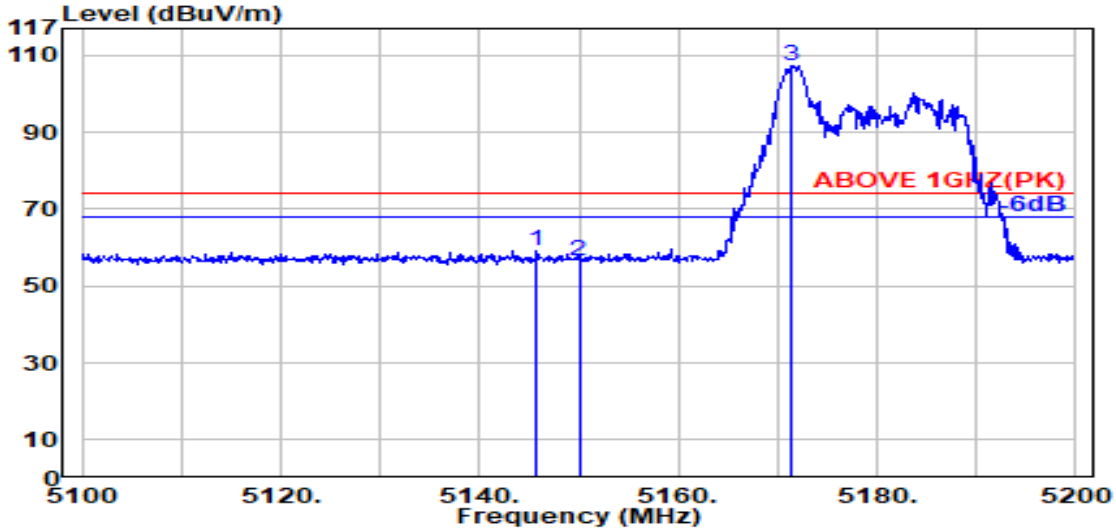

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.49	8.37	39.19	56.55	59.22	74.00	14.78	Peak
5150.000	33.50	8.37	39.19	53.66	56.35	74.00	17.65	Peak
@ 5171.400	33.63	8.40	39.19	104.66	107.50	---	---	Peak

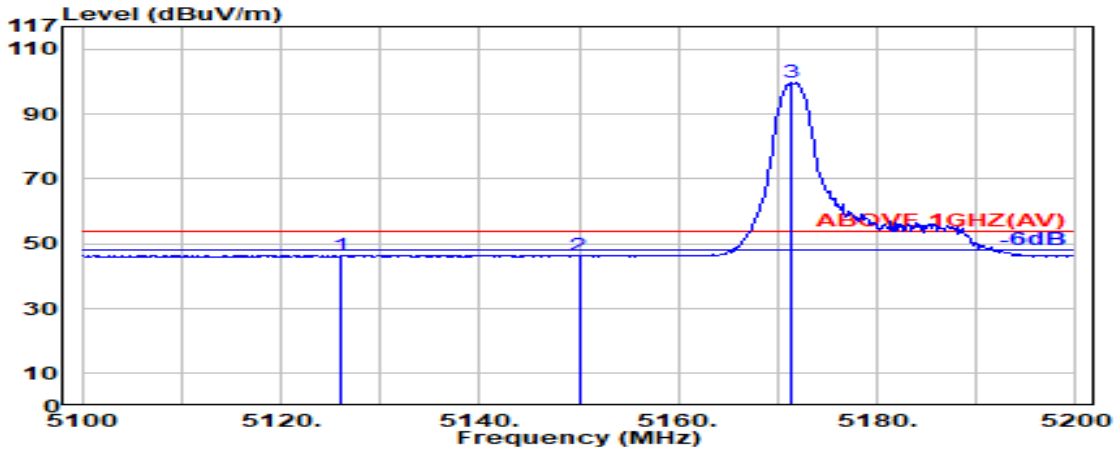


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.100	33.45	8.35	39.19	43.87	46.47	54.00	7.53	Peak
5150.000	33.50	8.37	39.19	43.54	46.22	54.00	7.78	Peak
@ 5171.400	33.63	8.40	39.19	96.86	99.70	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

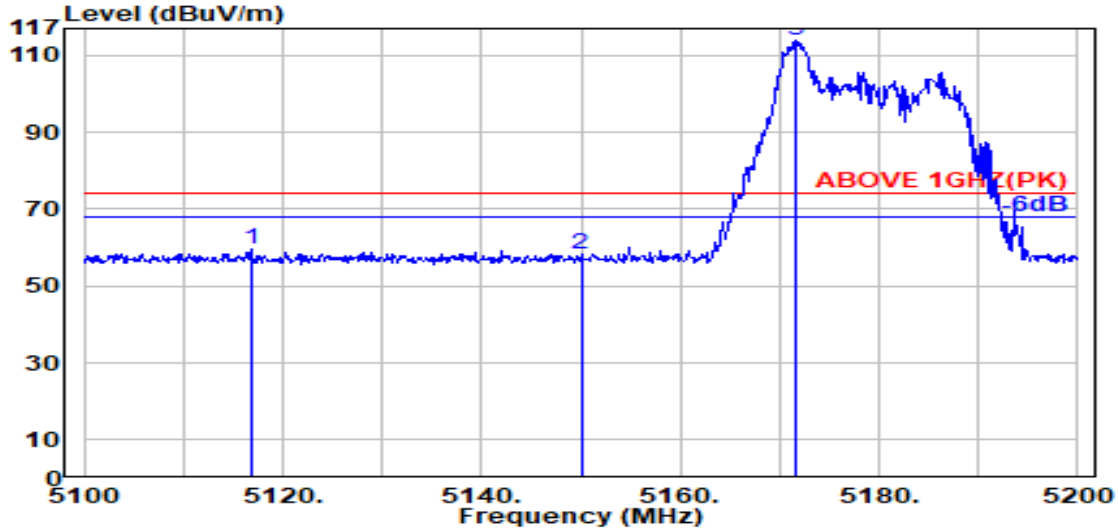

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.800	33.43	8.34	39.20	56.88	59.46	74.00	14.54	Peak
5150.000	33.50	8.37	39.19	55.42	58.10	74.00	15.90	Peak
@ 5171.600	33.63	8.40	39.19	110.98	113.81	---	---	Peak

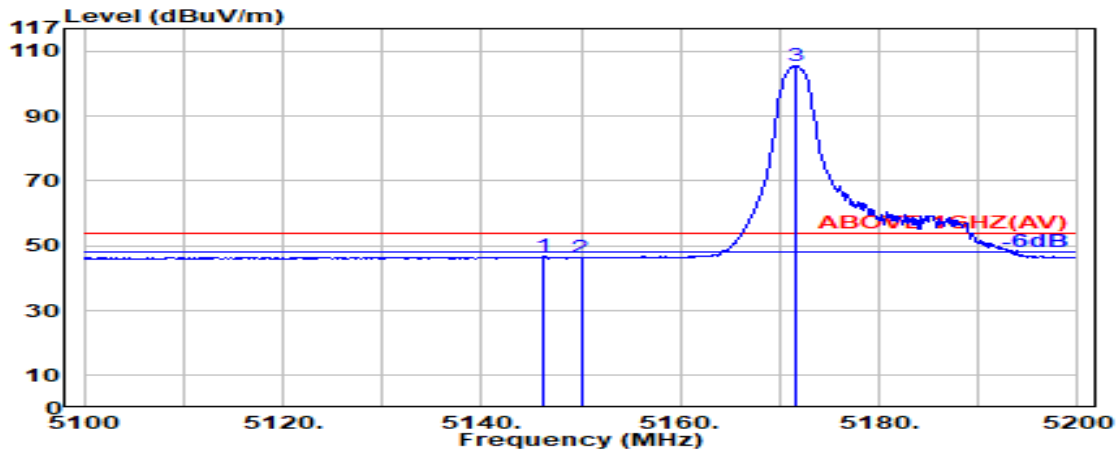


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	33.49	8.37	39.19	43.98	46.65	54.00	7.35	Average
5150.000	33.50	8.37	39.19	43.61	46.29	54.00	7.71	Average
@ 5171.600	33.63	8.40	39.19	102.63	105.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

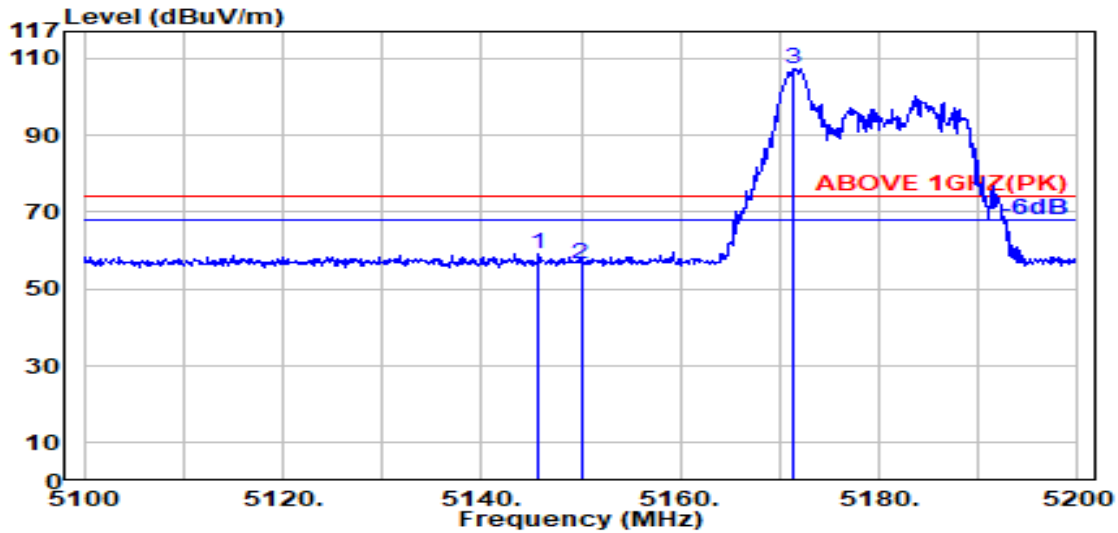

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.49	8.37	39.19	56.55	59.22	74.00	14.78	Peak
5150.000	33.50	8.37	39.19	53.66	56.35	74.00	17.65	Peak
@ 5171.400	33.63	8.40	39.19	104.66	107.50	---	---	Peak

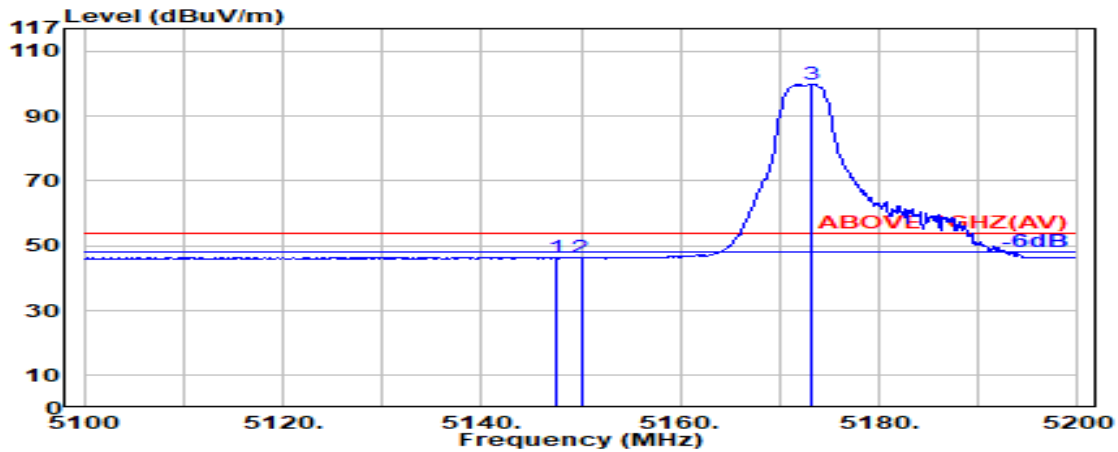


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	33.50	8.37	39.19	43.80	46.47	54.00	7.53	Average
5150.000	33.50	8.37	39.19	43.70	46.39	54.00	7.61	Average
@ 5173.100	33.64	8.40	39.19	97.10	99.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

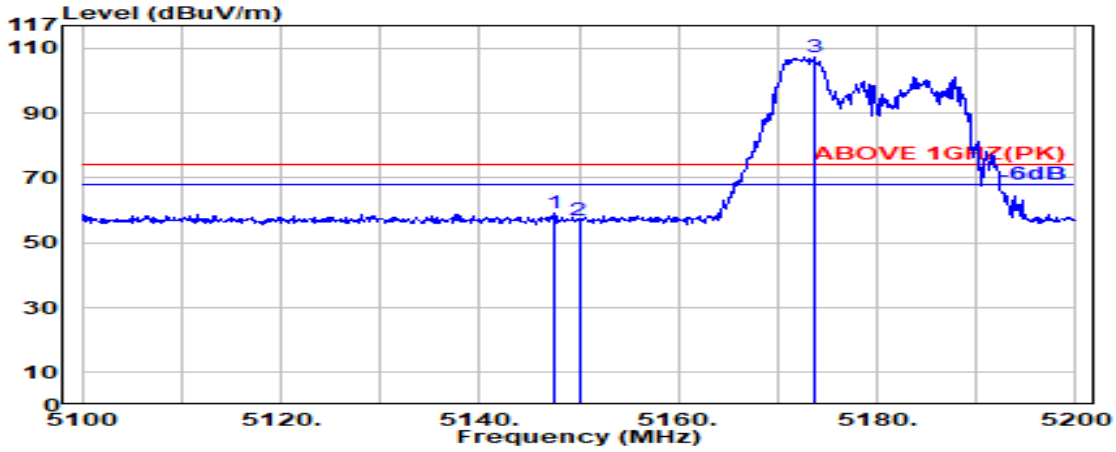

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.49	8.37	39.19	56.29	58.97	74.00	15.03	Peak
5150.000	33.50	8.37	39.19	54.46	57.14	74.00	16.86	Peak
@ 5173.600	33.64	8.40	39.19	104.57	107.43	--	---	Peak

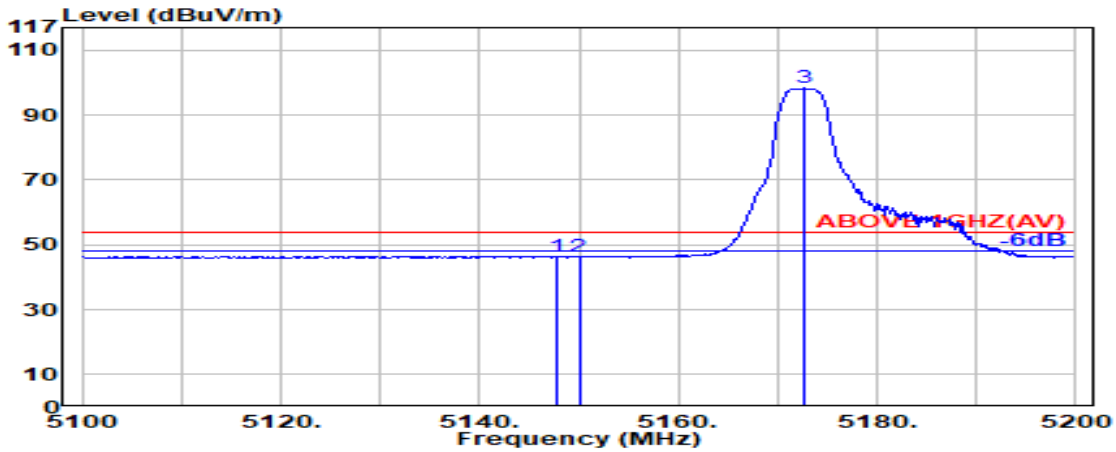


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	33.50	8.37	39.19	43.86	46.54	54.00	7.46	Average
5150.000	33.50	8.37	39.19	43.62	46.30	54.00	7.70	Average
@ 5172.600	33.64	8.40	39.19	95.42	98.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

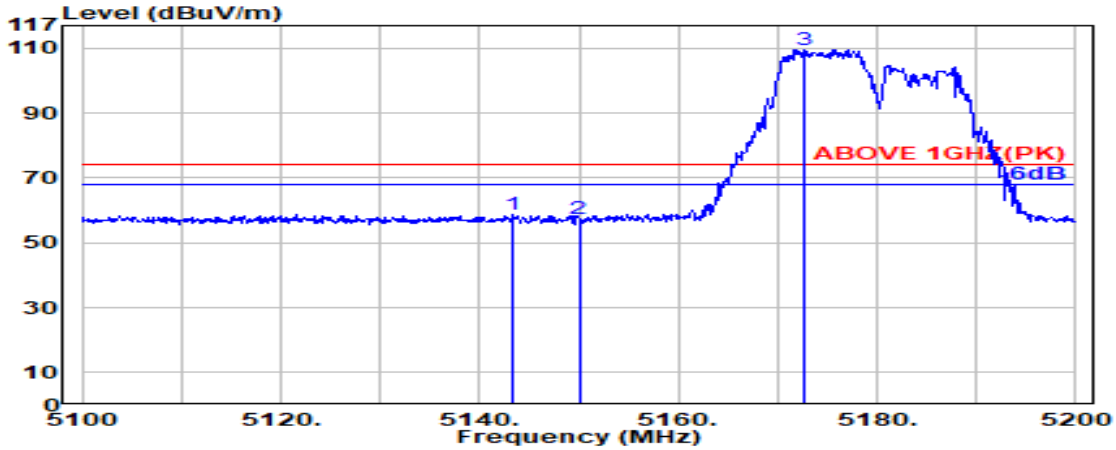

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.300	33.49	8.37	39.19	56.05	58.71	74.00	15.29	Peak
5150.000	33.50	8.37	39.19	54.53	57.21	74.00	16.79	Peak
@ 5172.600	33.64	8.40	39.19	106.80	109.65	---	---	Peak

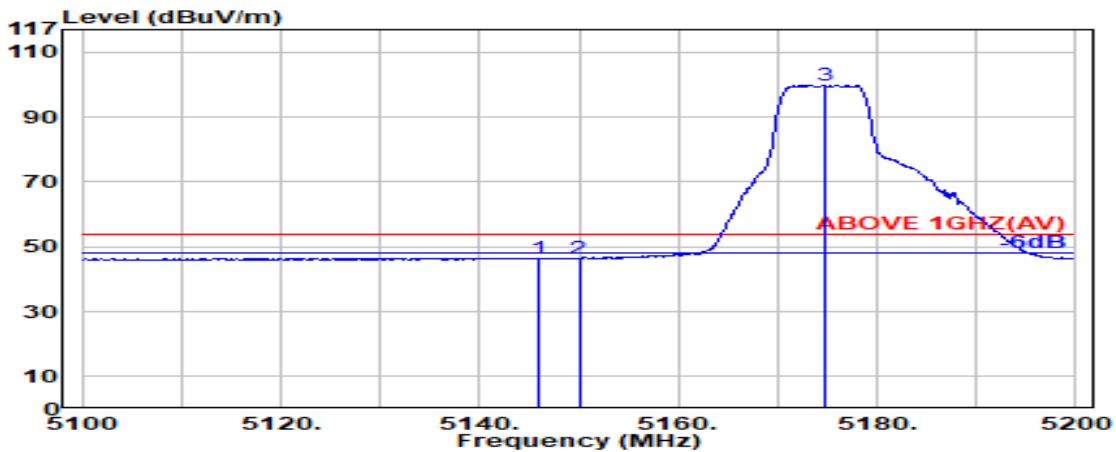


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.900	33.49	8.37	39.19	43.86	46.53	54.00	7.47	Average
5150.000	33.50	8.37	39.19	43.81	46.49	54.00	7.51	Average
@ 5174.700	33.65	8.40	39.19	96.99	99.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

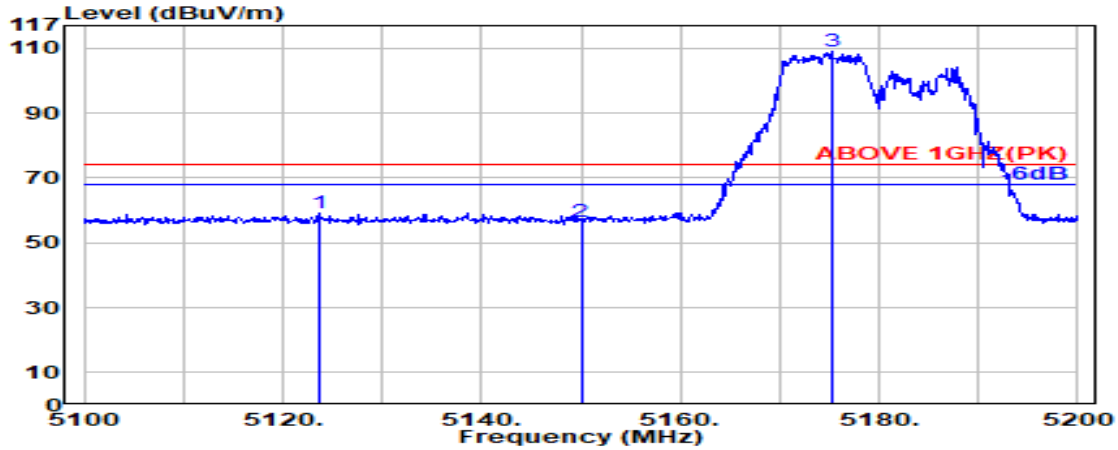

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.800	33.45	8.35	39.19	56.55	59.15	74.00	14.85	Peak
5150.000	33.50	8.37	39.19	53.88	56.56	74.00	17.44	Peak
@ 5175.200	33.65	8.40	39.19	106.03	108.89	---	---	Peak

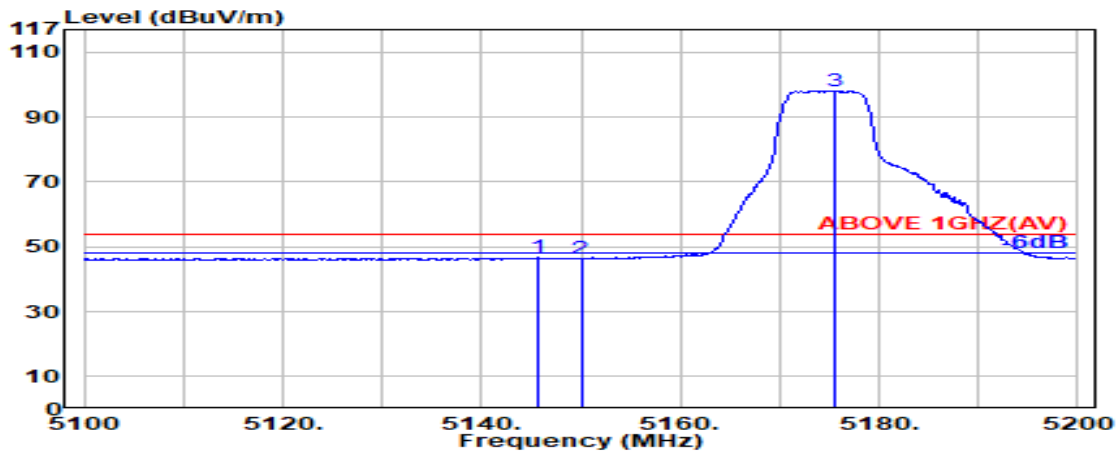


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.49	8.37	39.19	43.97	46.64	54.00	7.36	Average
5150.000	33.50	8.37	39.19	43.85	46.53	54.00	7.47	Average
@ 5175.600	33.65	8.40	39.19	95.17	98.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

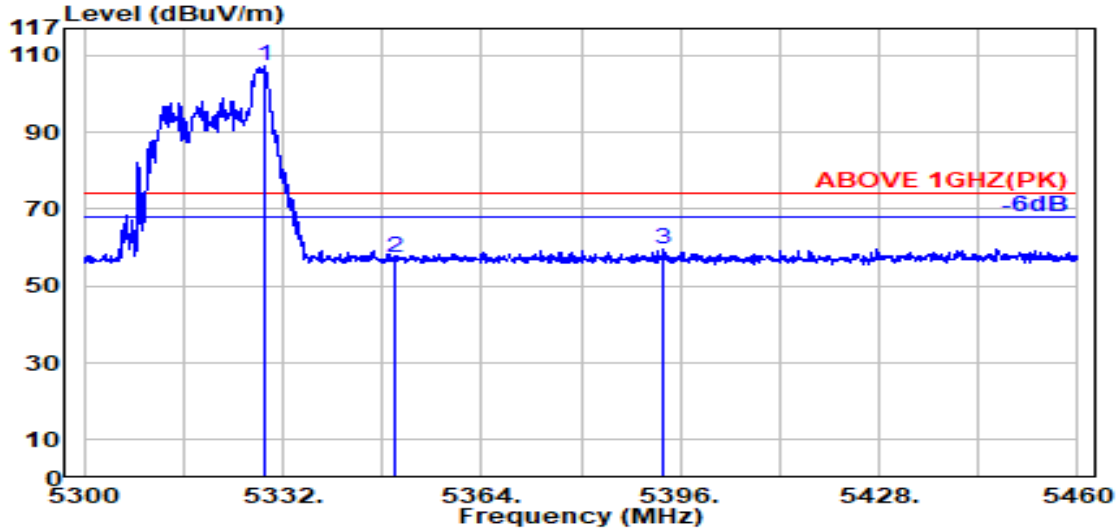

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5329.000	33.74	8.55	39.17	103.97	107.09	---	---	Peak
5350.000	33.70	8.57	39.17	54.24	57.34	74.00	16.66	Peak
5393.400	33.87	8.61	39.16	56.28	59.60	74.00	14.40	Peak

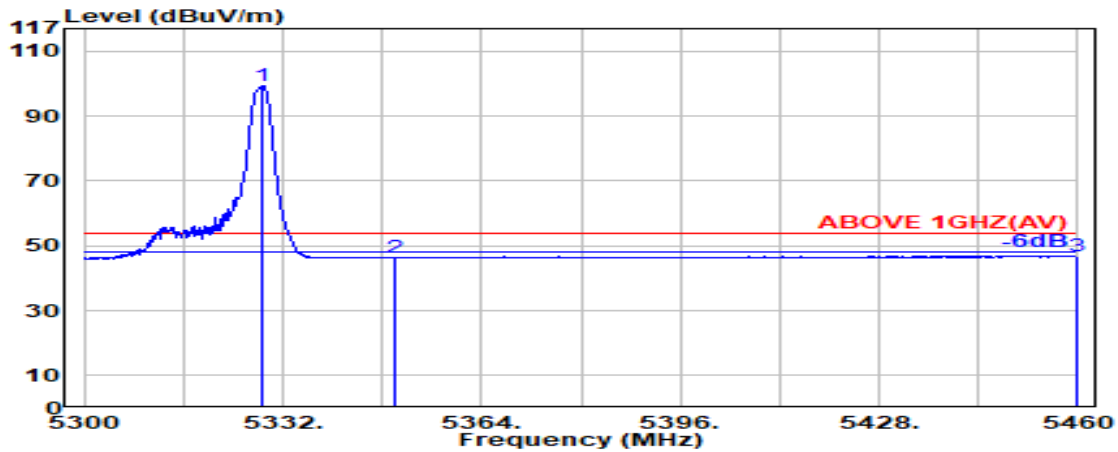


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.74	8.55	39.17	96.23	99.35	---	---	Average
5350.000	33.70	8.57	39.17	43.24	46.34	54.00	7.66	Average
5459.700	34.02	8.68	39.15	43.41	46.95	54.00	7.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

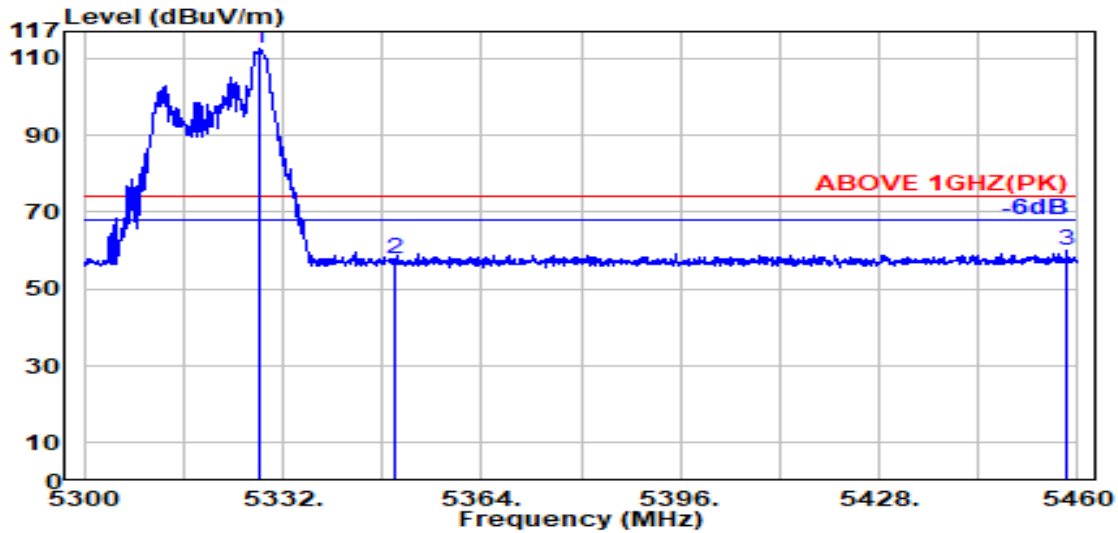

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	109.45	112.58	---	---	Peak
5350.000	33.70	8.57	39.17	54.58	57.68	74.00	16.32	Peak
5458.300	34.02	8.68	39.15	56.46	59.99	74.00	14.01	Peak

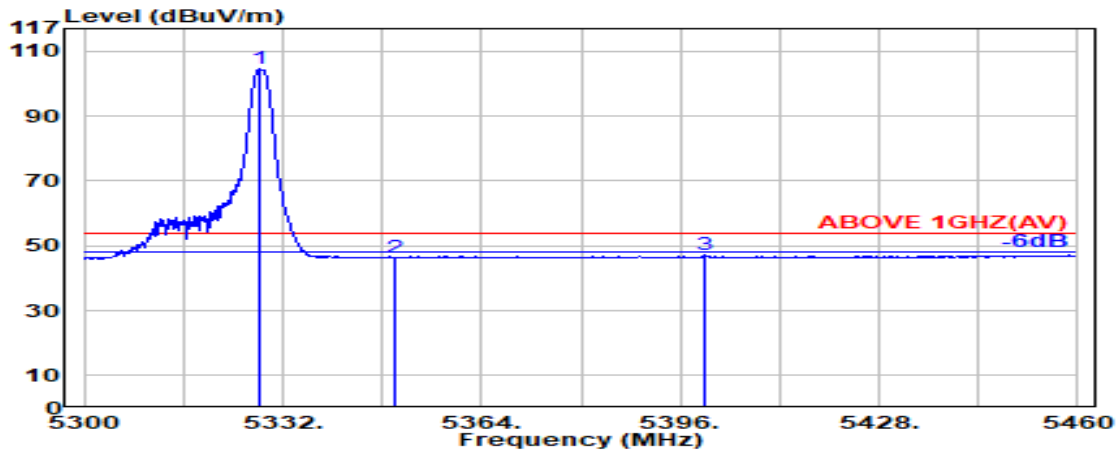


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	101.48	104.61	---	---	Average
5350.000	33.70	8.57	39.17	43.29	46.39	54.00	7.61	Average
5399.800	33.90	8.62	39.16	43.83	47.19	54.00	6.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

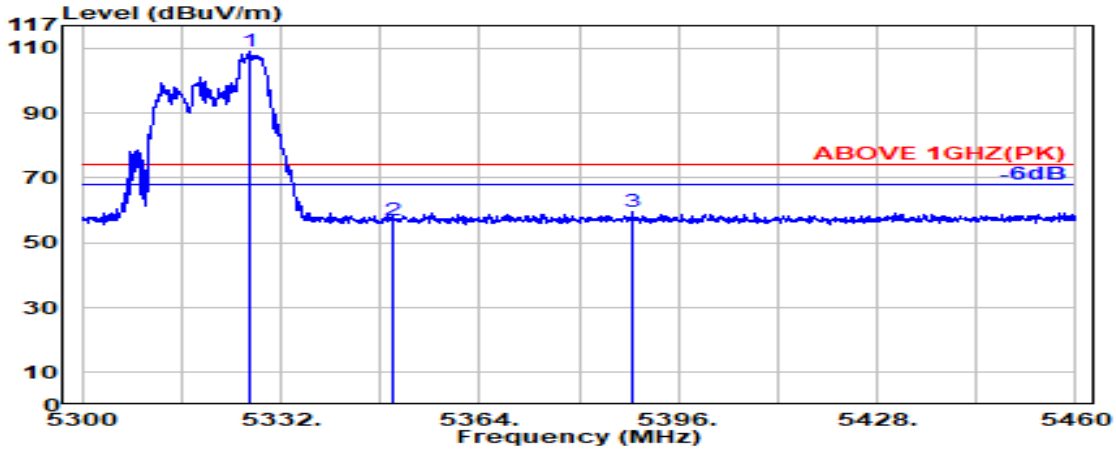

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.900	33.75	8.55	39.17	106.01	109.14	--	---	Peak
5350.000	33.70	8.57	39.17	54.03	57.14	74.00	16.86	Peak
5388.500	33.85	8.61	39.16	56.26	59.56	74.00	14.44	Peak

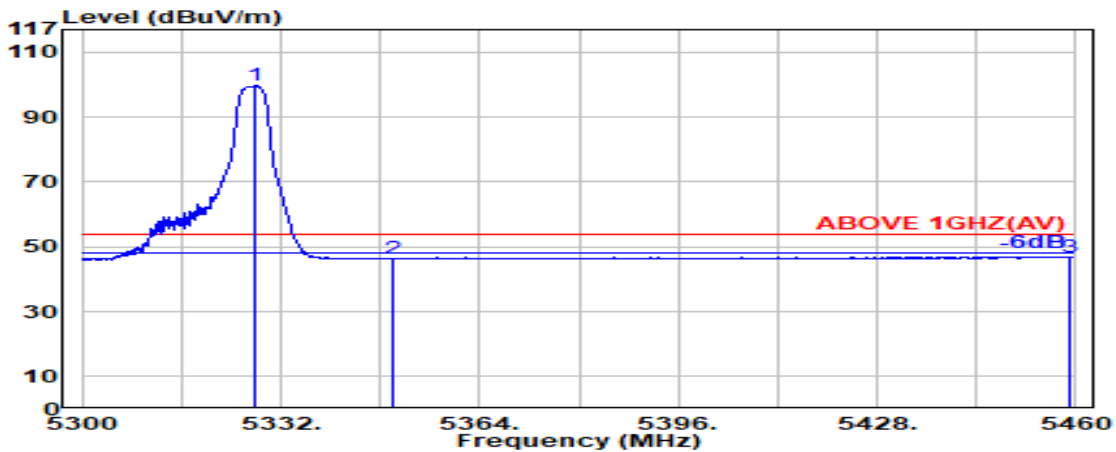


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.74	8.55	39.17	96.65	99.78	---	---	Average
5350.000	33.70	8.57	39.17	43.12	46.22	54.00	7.78	Average
5459.100	34.02	8.68	39.15	43.44	46.98	54.00	7.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

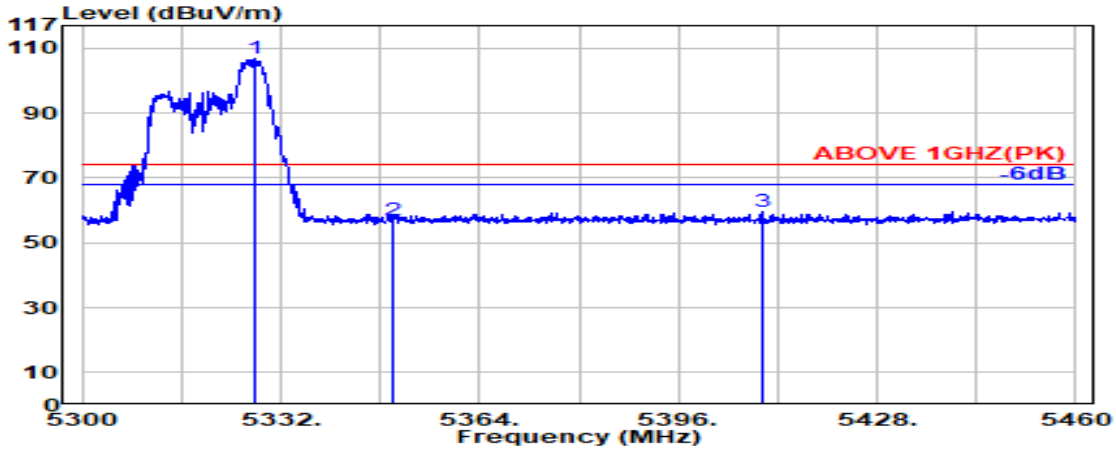

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	33.74	8.55	39.17	103.81	106.93	--	---	Peak
5350.000	33.70	8.57	39.17	53.98	57.09	74.00	16.91	Peak
5409.400	33.92	8.63	39.16	56.20	59.59	74.00	14.41	Peak

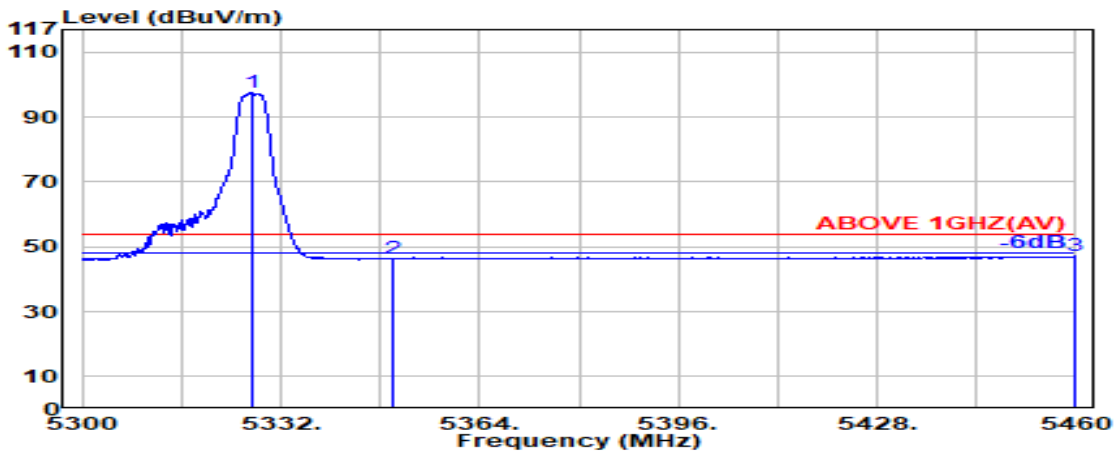


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	33.75	8.55	39.17	94.55	97.68	---	---	Average
5350.000	33.70	8.57	39.17	43.21	46.31	54.00	7.69	Average
5459.700	34.02	8.68	39.15	43.50	47.04	54.00	6.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

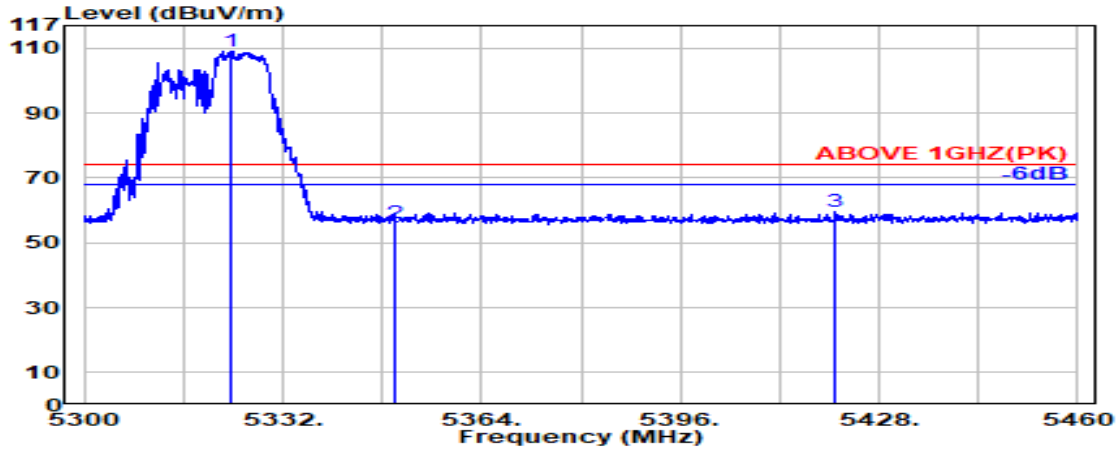

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	33.75	8.55	39.17	105.94	109.07	---	---	Peak
5350.000	33.70	8.57	39.17	53.19	56.29	74.00	17.71	Peak
5420.900	33.94	8.64	39.16	55.99	59.42	74.00	14.58	Peak

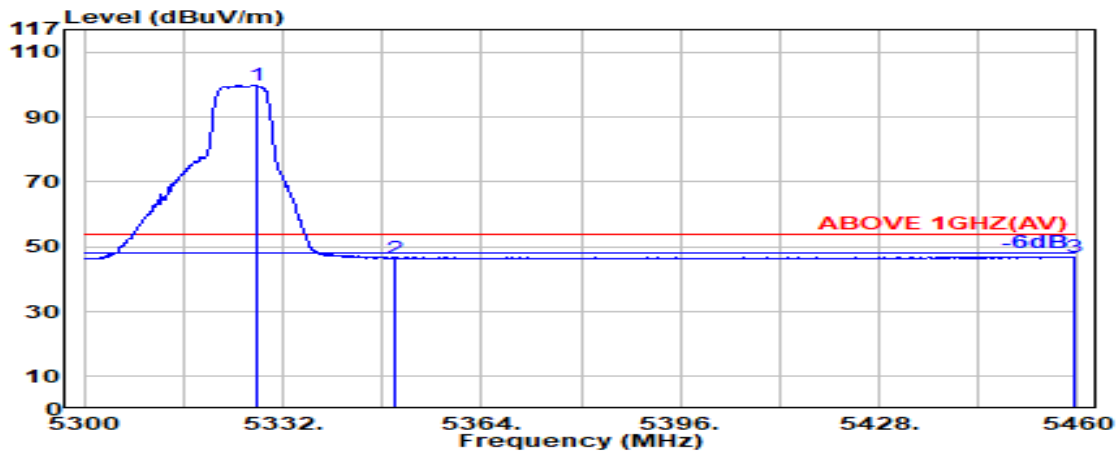


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.74	8.55	39.17	96.67	99.80	---	---	Average
5350.000	33.70	8.57	39.17	43.45	46.56	54.00	7.44	Average
5459.400	34.02	8.68	39.15	43.41	46.96	54.00	7.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

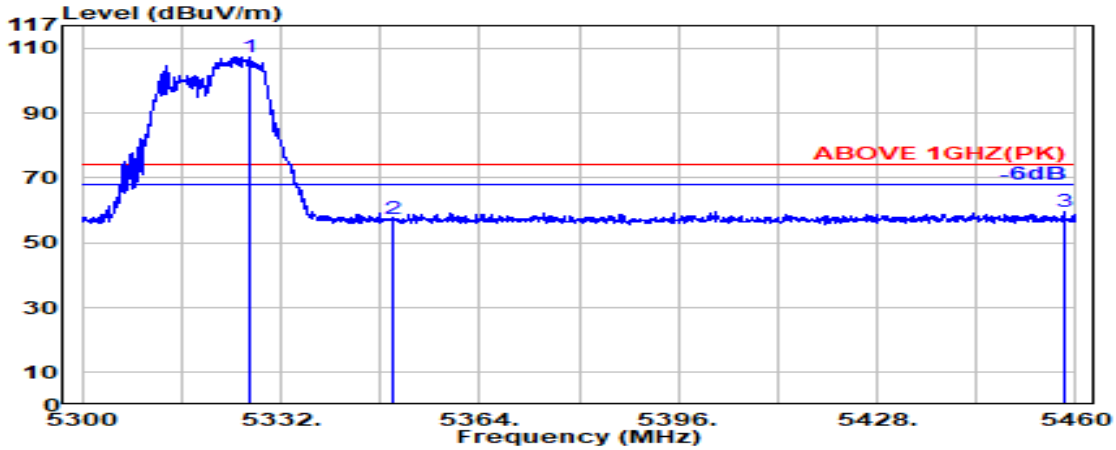

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5327.000	33.75	8.55	39.17	104.13	107.25	---	---	Peak
5350.000	33.70	8.57	39.17	54.36	57.46	74.00	16.54	Peak
5458.000	34.02	8.68	39.15	56.05	59.59	74.00	14.41	Peak

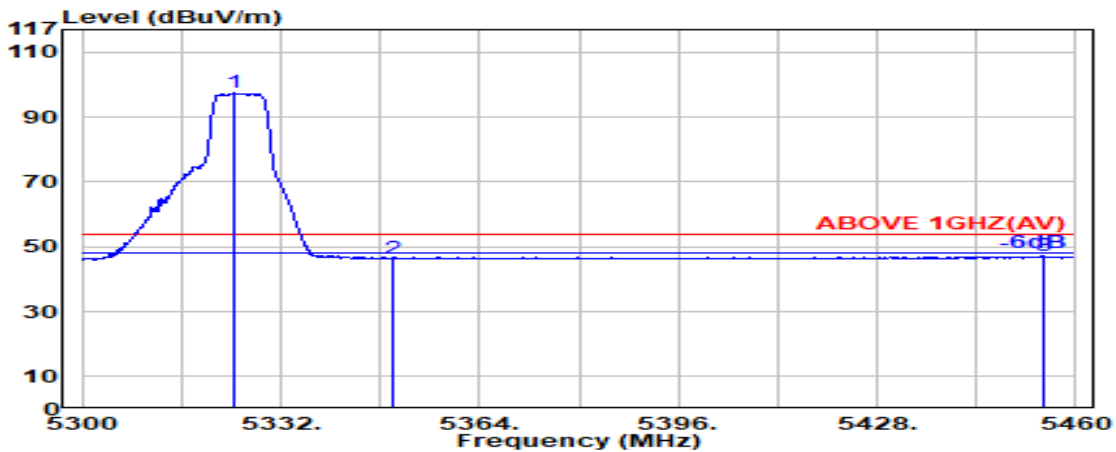


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5324.300	33.75	8.55	39.17	94.24	97.37	---	---	Average
5350.000	33.70	8.57	39.17	43.29	46.39	54.00	7.61	Average
5454.700	34.01	8.67	39.16	43.52	47.05	54.00	6.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

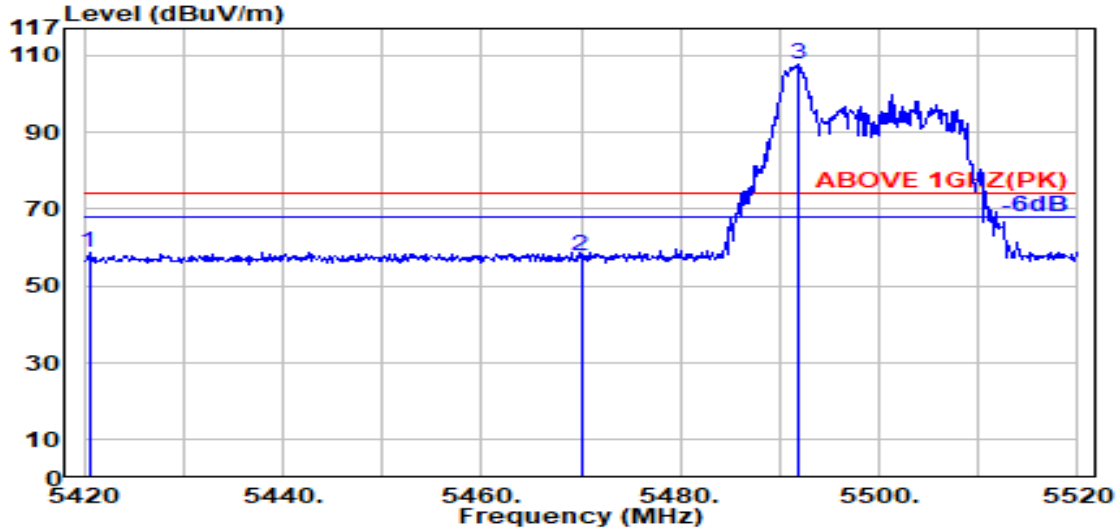

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.500	33.94	8.64	39.16	55.34	58.77	74.00	15.23	Peak
5470.000	34.04	8.69	39.15	54.06	57.64	74.00	16.36	Peak
@ 5492.000	34.08	8.71	39.15	104.26	107.90	---	---	Peak

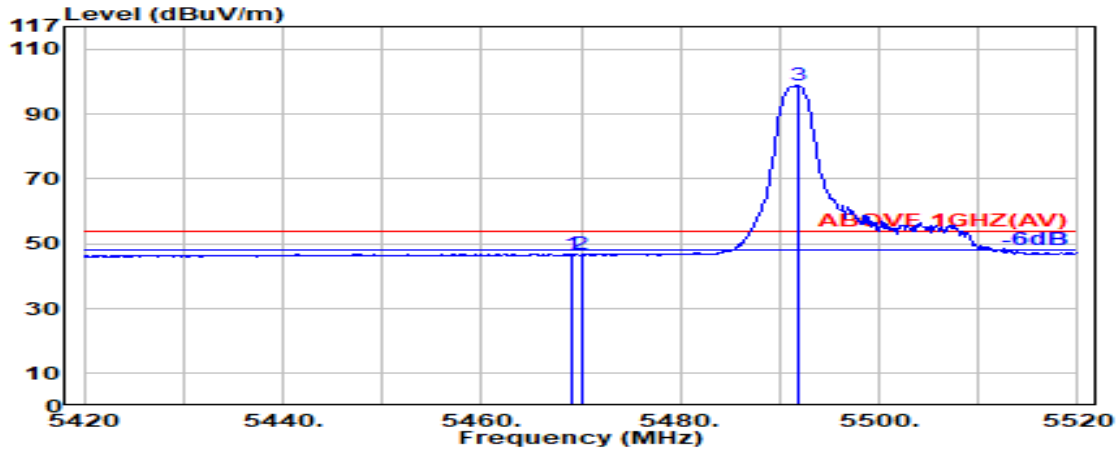


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	43.16	46.74	54.00	7.26	Average
5470.000	34.04	8.69	39.15	43.08	46.65	54.00	7.35	Average
@ 5491.800	34.08	8.71	39.15	95.38	99.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

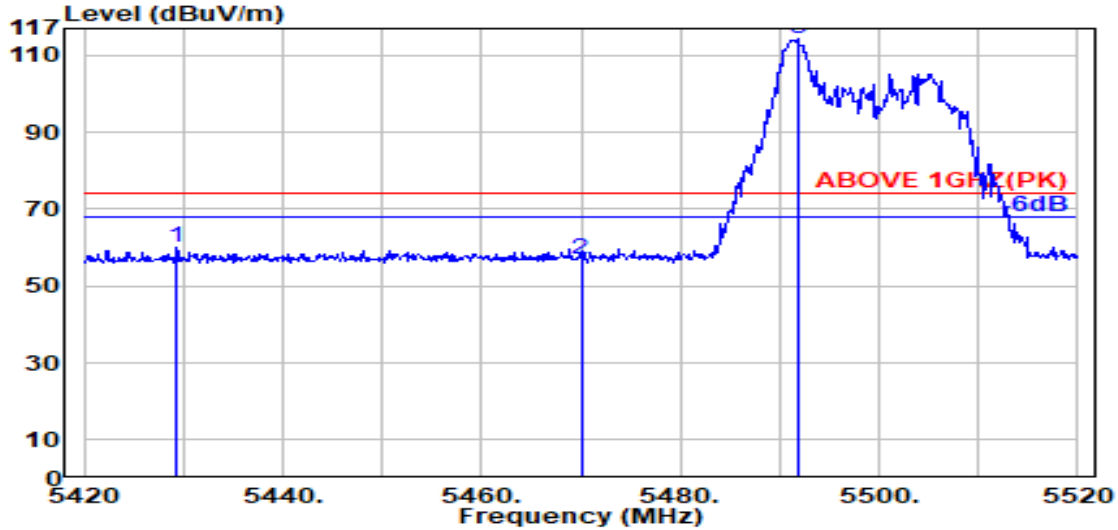

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.300	33.96	8.65	39.16	56.39	59.84	74.00	14.16	Peak
5470.000	34.04	8.69	39.15	53.57	57.15	74.00	16.85	Peak
@ 5491.900	34.08	8.71	39.15	110.68	114.32	---	---	Peak

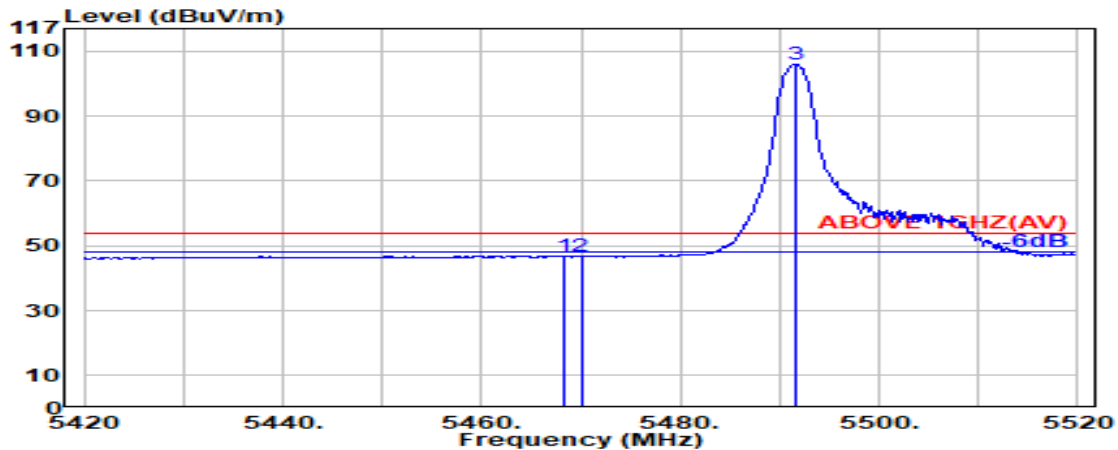


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.15	43.29	46.86	54.00	7.14	Average
5470.000	34.04	8.69	39.15	43.09	46.66	54.00	7.34	Average
@ 5491.500	34.08	8.71	39.15	102.28	105.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

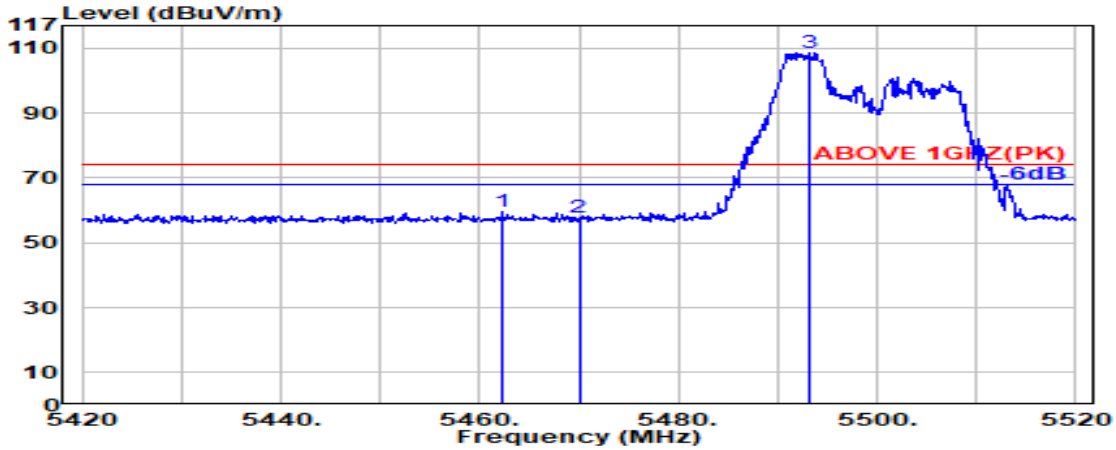

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.02	8.68	39.15	56.23	59.78	74.00	14.22	Peak
5470.000	34.04	8.69	39.15	54.25	57.82	74.00	16.18	Peak
@ 5493.100	34.09	8.71	39.15	105.18	108.83	---	---	Peak

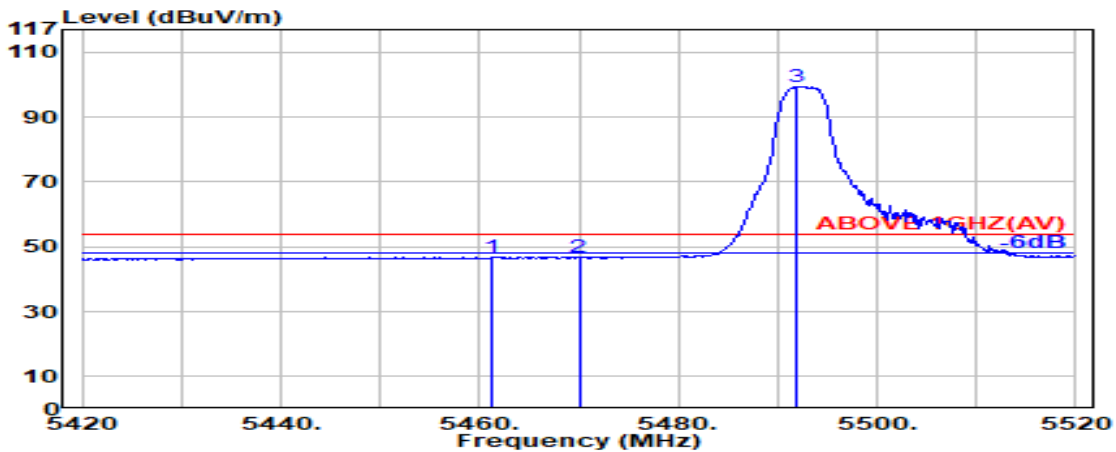


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.02	8.68	39.15	43.36	46.90	54.00	7.10	Average
5470.000	34.04	8.69	39.15	43.08	46.66	54.00	7.34	Average
@ 5491.900	34.08	8.71	39.15	95.88	99.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

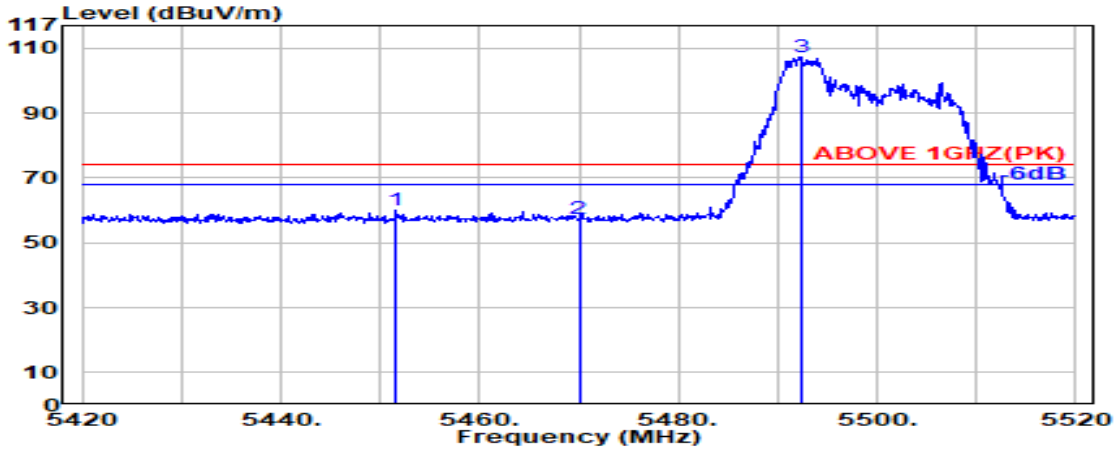

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.600	34.00	8.67	39.16	56.71	60.22	74.00	13.78	Peak
5470.000	34.04	8.69	39.15	53.97	57.54	74.00	16.46	Peak
@ 5492.500	34.09	8.71	39.15	103.55	107.20	---	---	Peak

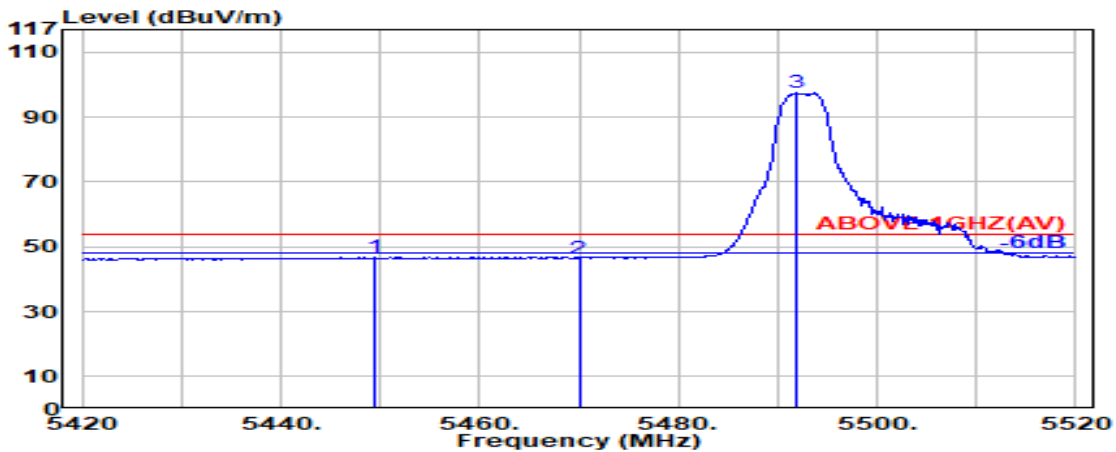


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.500	34.00	8.67	39.16	43.35	46.86	54.00	7.14	Peak
5470.000	34.04	8.69	39.15	42.99	46.57	54.00	7.43	Peak
@ 5491.900	34.08	8.71	39.15	93.85	97.50	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

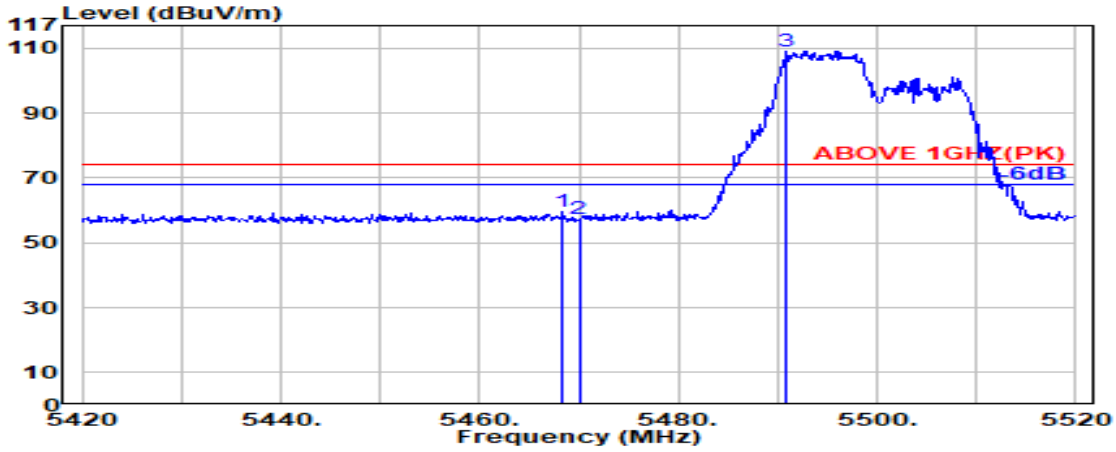

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.15	56.14	59.71	74.00	14.29	Peak
5470.000	34.04	8.69	39.15	53.61	57.19	74.00	16.81	Peak
@ 5490.900	34.08	8.71	39.15	105.60	109.24	---	---	Peak

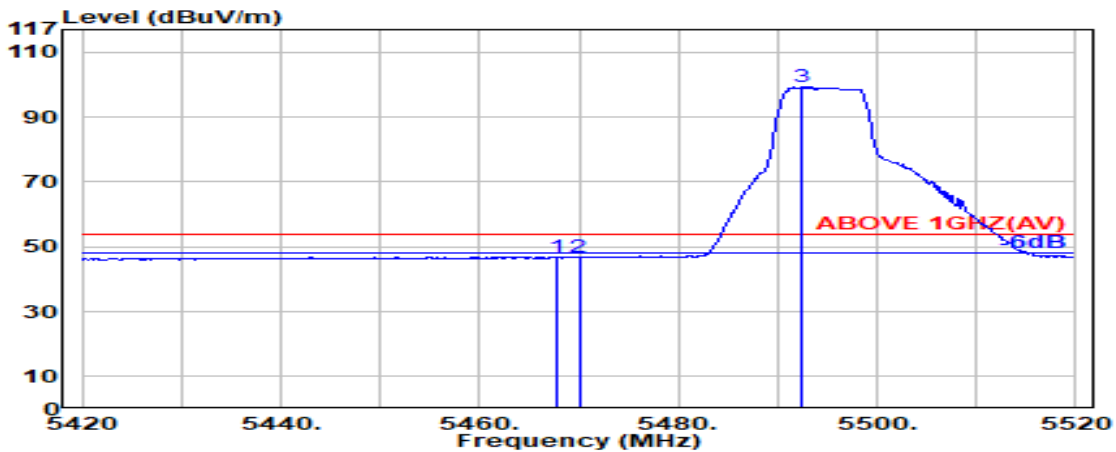


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.15	43.27	46.84	54.00	7.16	Average
5470.000	34.04	8.69	39.15	43.15	46.73	54.00	7.27	Average
@ 5492.400	34.08	8.71	39.15	95.64	99.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

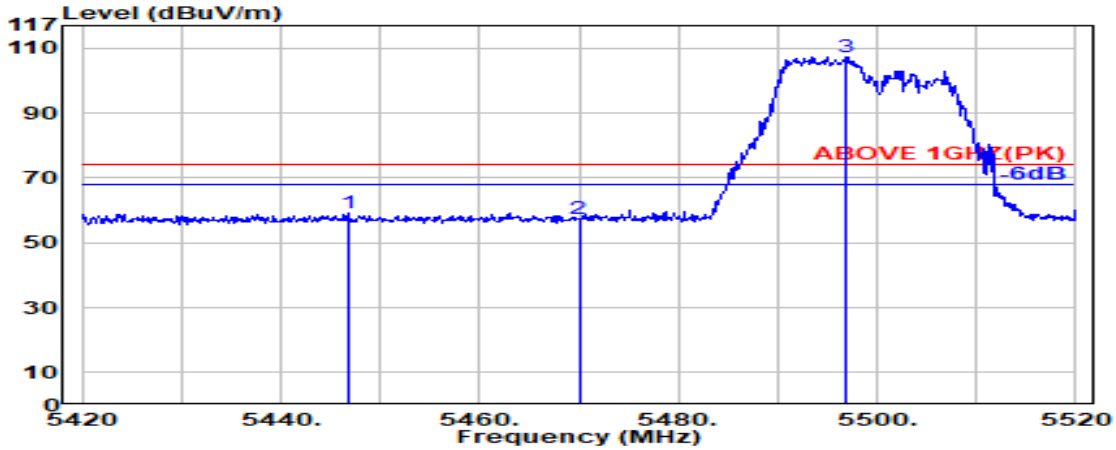

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.700	33.99	8.67	39.16	55.63	59.13	74.00	14.87	Peak
5470.000	34.04	8.69	39.15	53.65	57.22	74.00	16.78	Peak
@ 5496.800	34.09	8.71	39.15	103.76	107.41	---	---	Peak

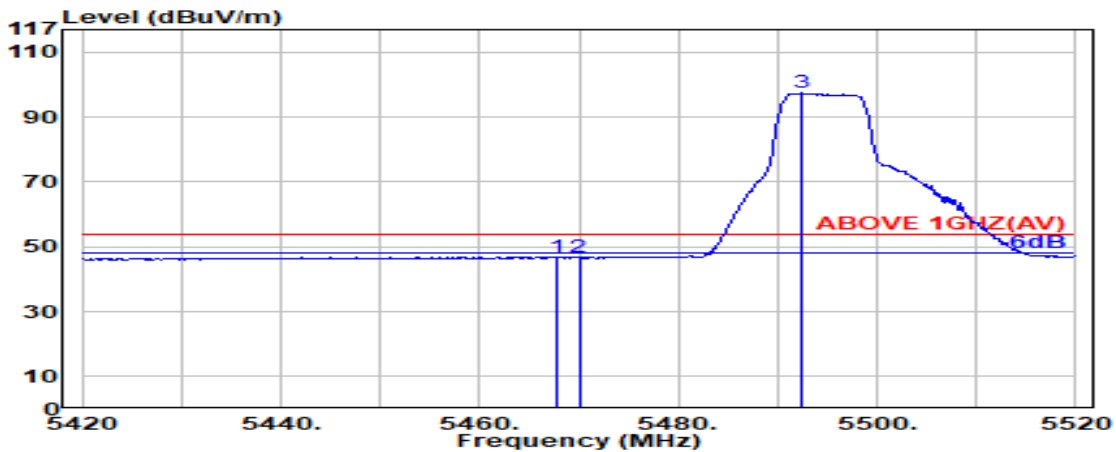


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.15	43.35	46.92	54.00	7.08	Average
5470.000	34.04	8.69	39.15	43.12	46.69	54.00	7.31	Average
@ 5492.400	34.08	8.71	39.15	93.80	97.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

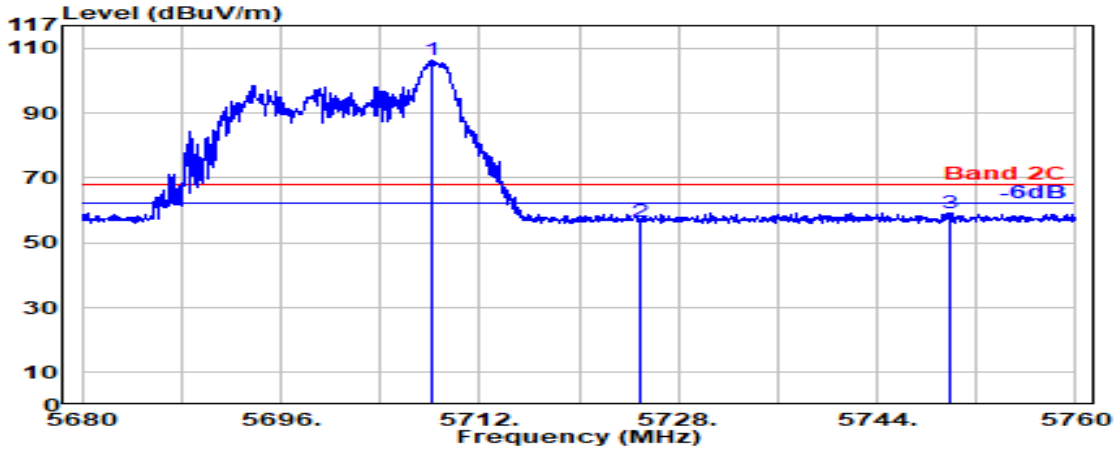

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.200	33.60	8.91	39.19	103.09	106.41	---	---	Peak
5725.000	33.60	8.93	39.20	53.38	56.71	68.20	11.49	Peak
5749.950	33.60	8.95	39.20	55.90	59.25	68.20	8.95	Peak

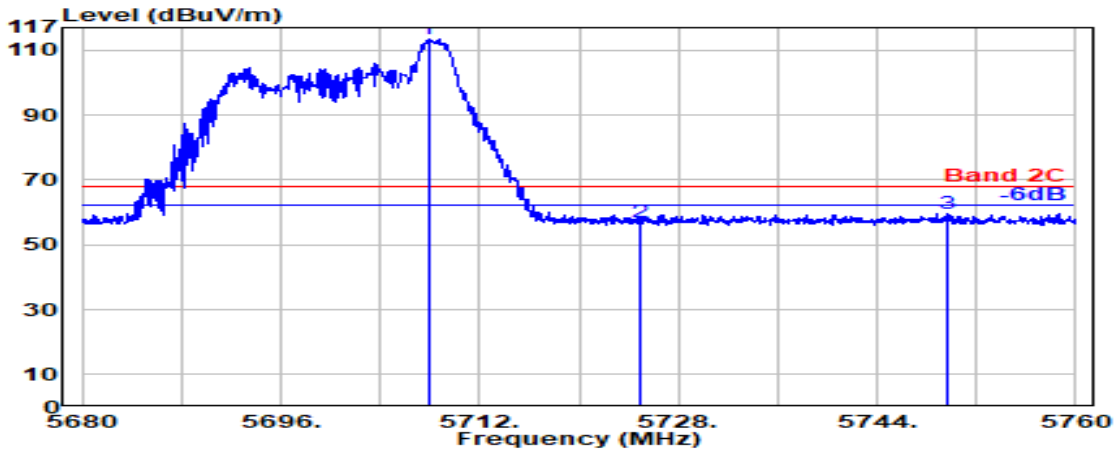


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.850	33.60	8.91	39.19	110.11	113.43	---	---	Peak
5725.000	33.60	8.93	39.20	53.79	57.12	68.20	11.08	Peak
5749.650	33.60	8.95	39.20	56.31	59.65	68.20	8.55	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

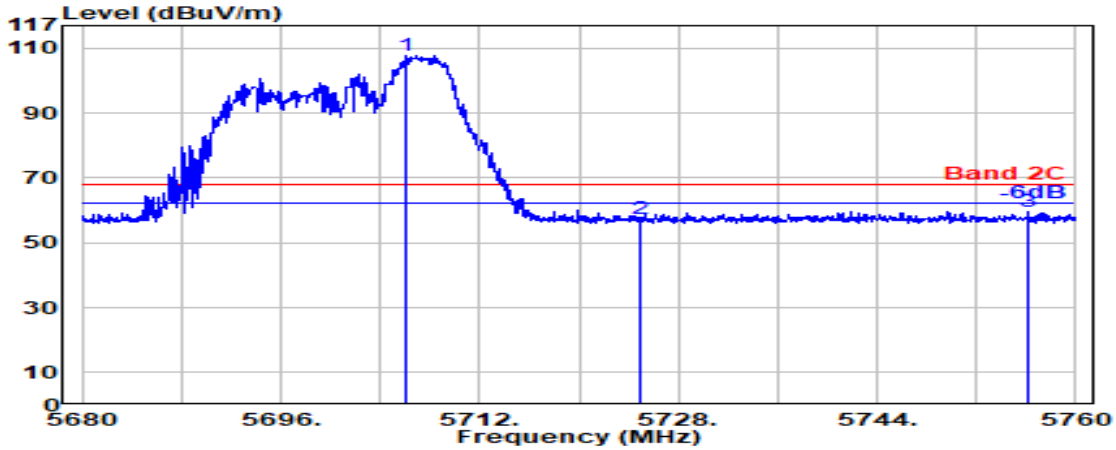

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.050	33.60	8.91	39.19	104.56	107.87	---	---	Peak
5725.000	33.60	8.93	39.20	53.96	57.29	68.20	10.91	Peak
5756.100	33.62	8.95	39.20	56.22	59.60	68.20	8.60	Peak

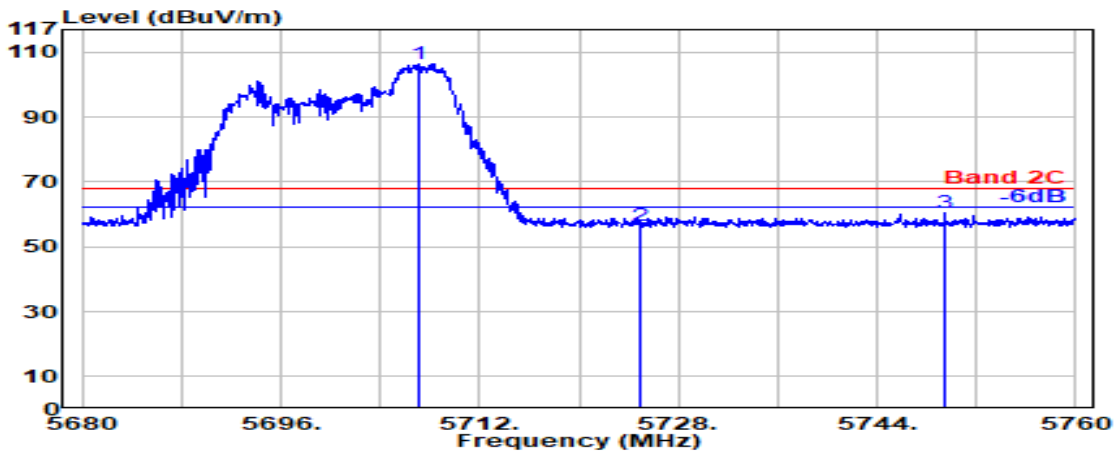


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.100	33.60	8.91	39.19	103.06	106.38	---	---	Peak
5725.000	33.60	8.93	39.20	53.36	56.69	68.20	11.51	Peak
5749.450	33.60	8.95	39.20	57.32	60.67	68.20	7.53	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

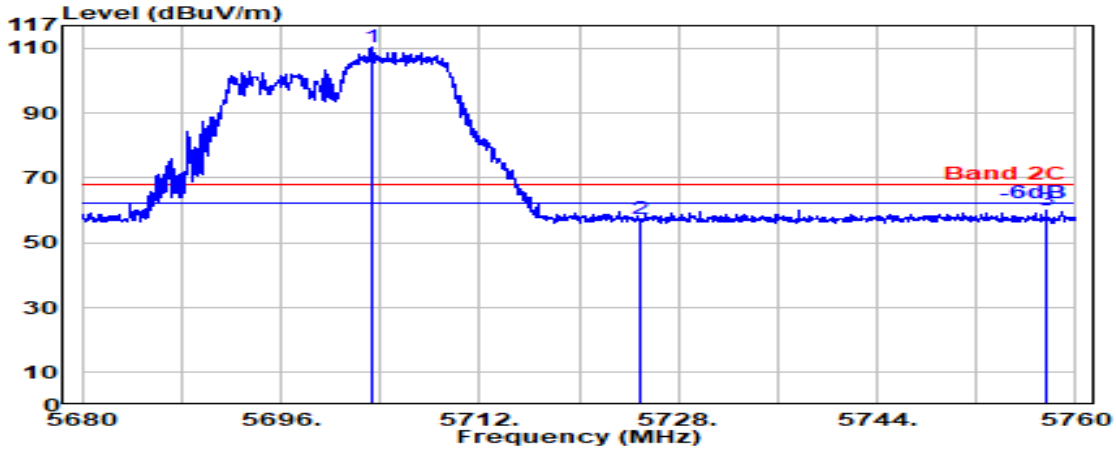

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.250	33.60	8.91	39.19	106.87	110.18	---	---	Peak
5725.000	33.60	8.93	39.20	54.17	57.50	68.20	10.70	Peak
5757.600	33.63	8.96	39.20	56.71	60.10	68.20	8.10	Peak

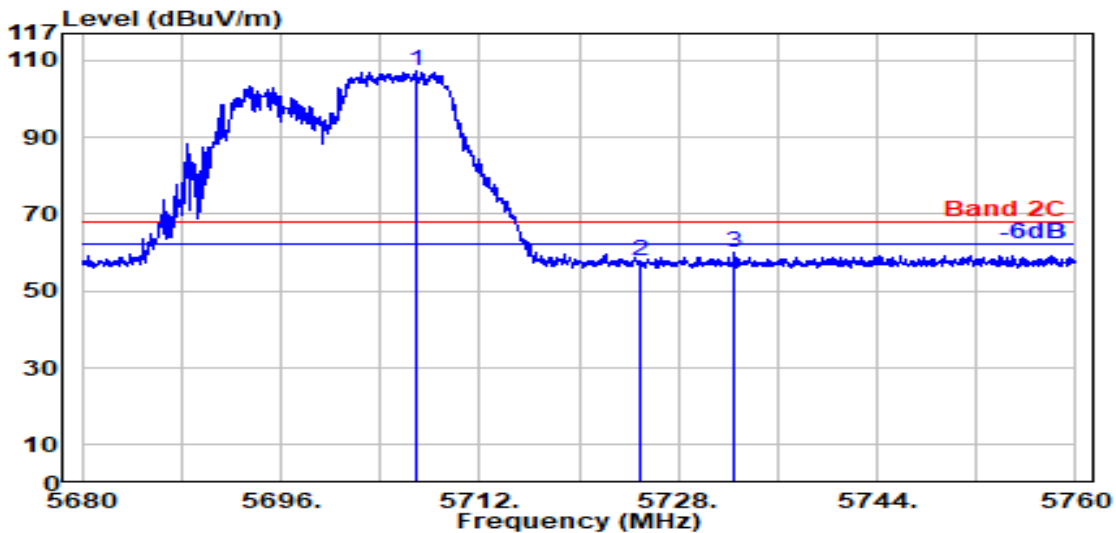


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.000	33.60	8.91	39.19	104.02	107.34	---	---	Peak
5725.000	33.60	8.93	39.20	54.37	57.70	68.20	10.50	Peak
5732.550	33.60	8.93	39.20	56.53	59.87	68.20	8.33	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

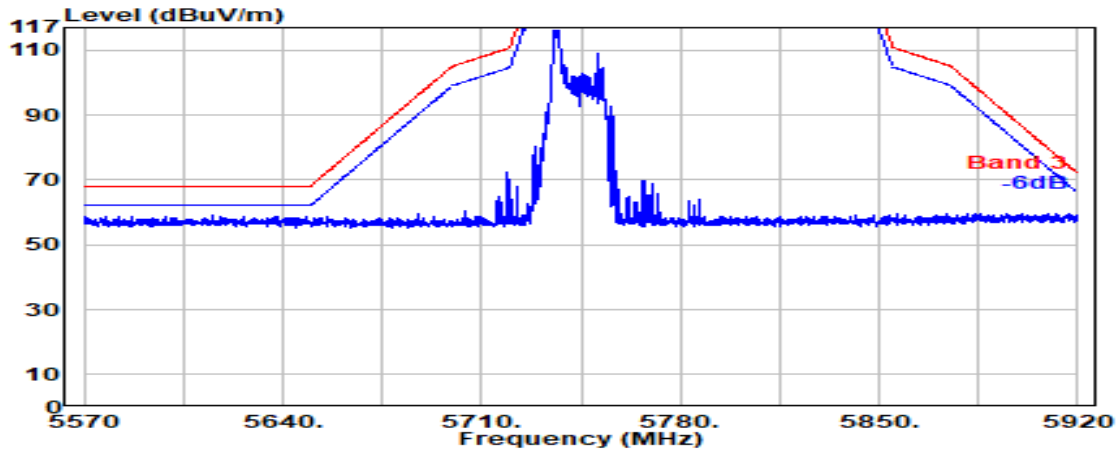


Antenna at Vertical Polarization

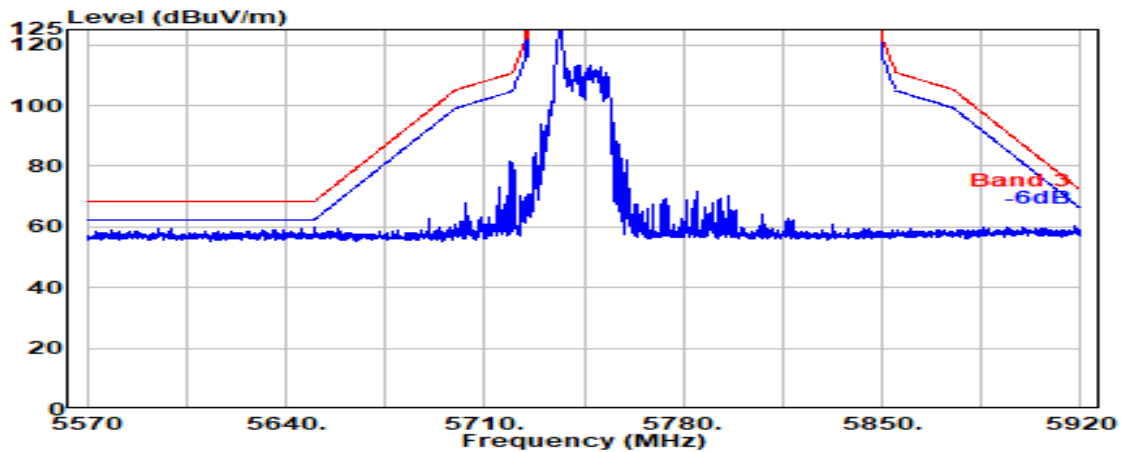


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

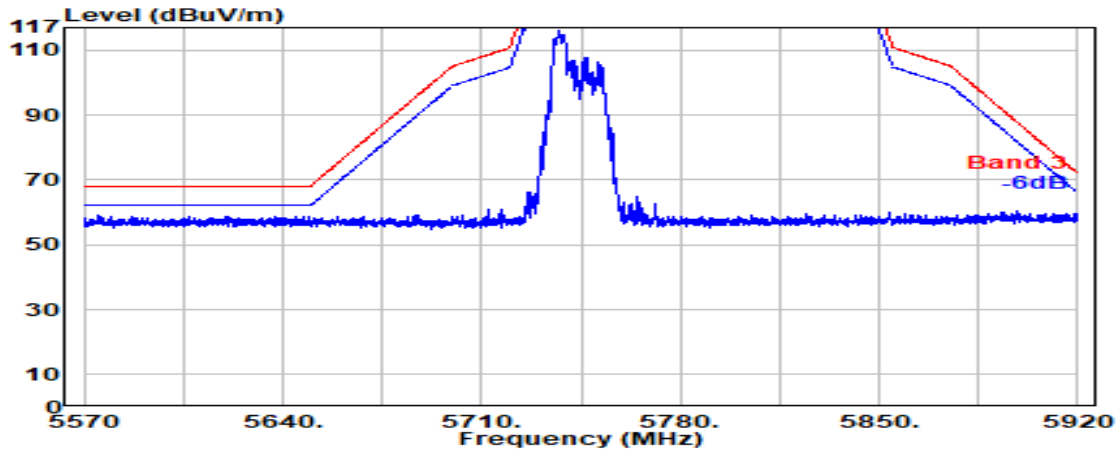


Antenna at Vertical Polarization

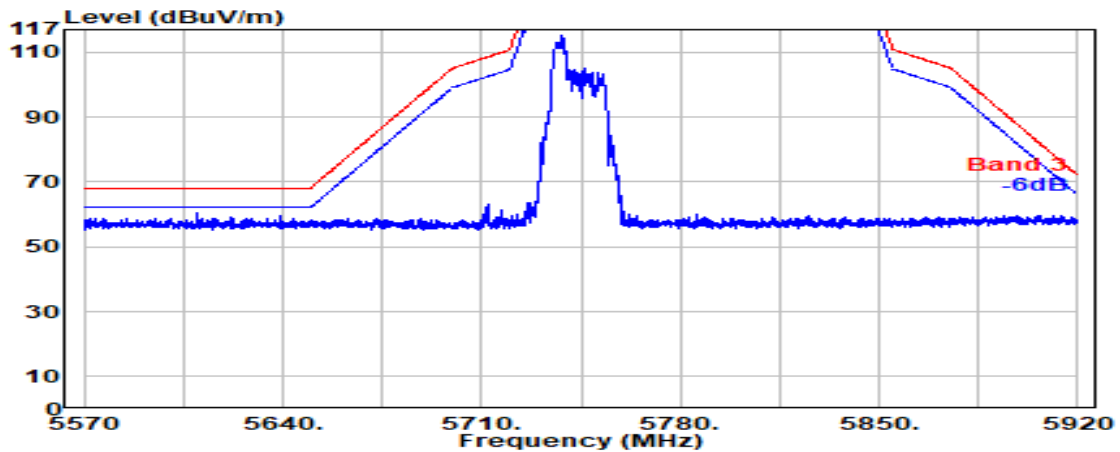


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

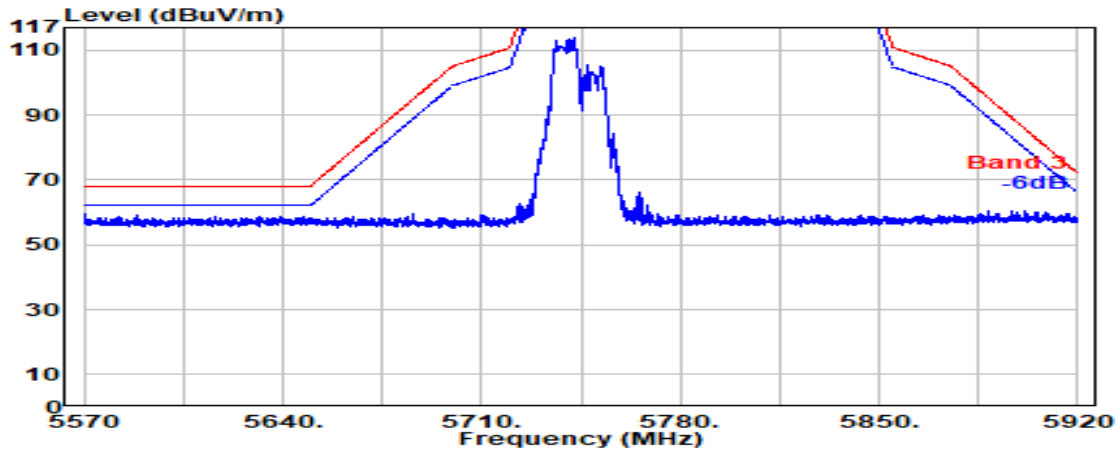


Antenna at Vertical Polarization

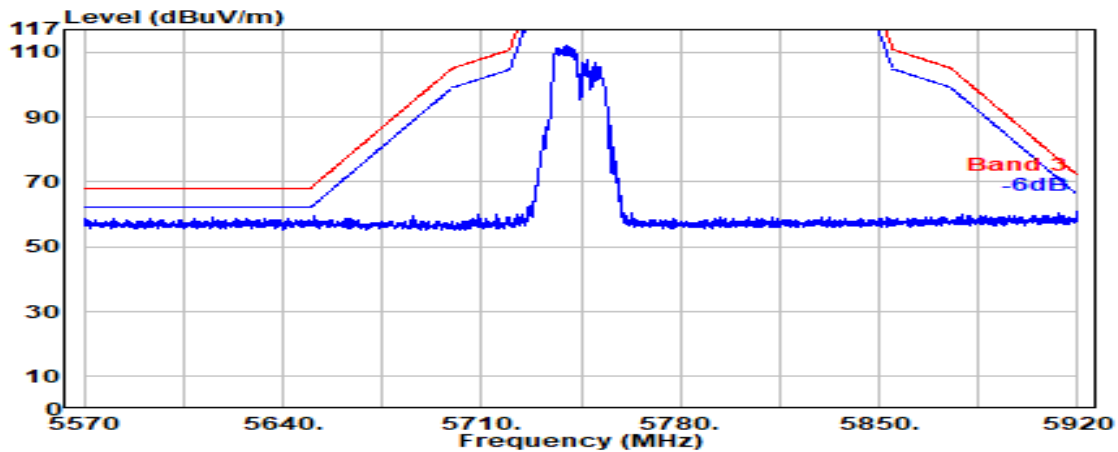


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

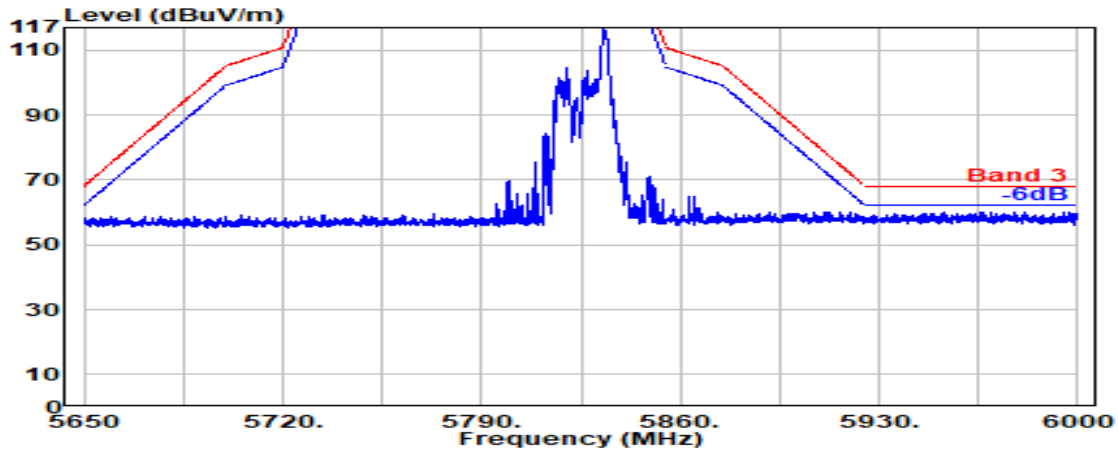


Antenna at Vertical Polarization

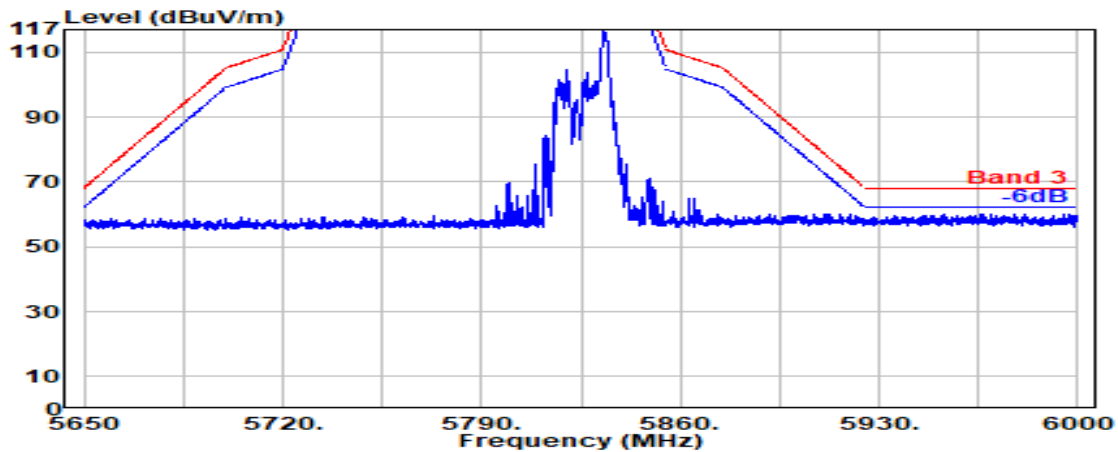


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

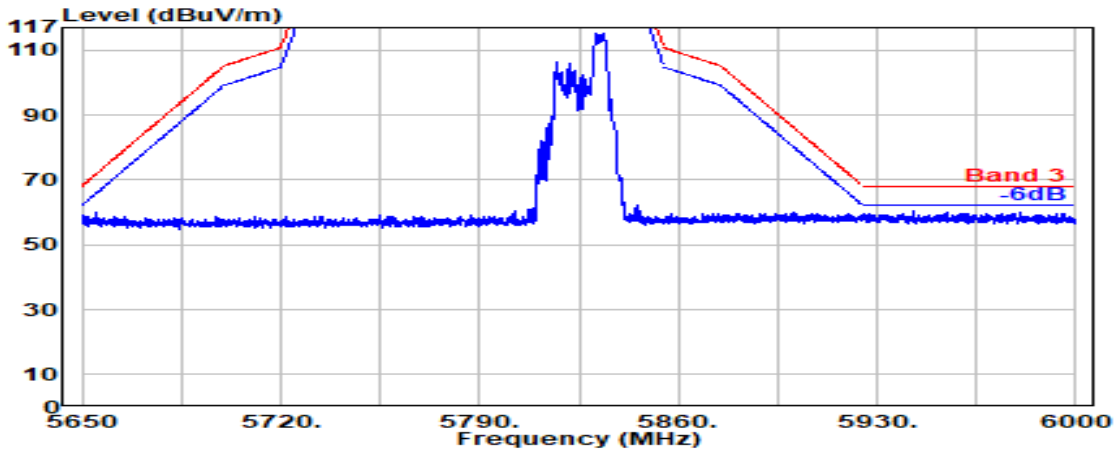


Antenna at Vertical Polarization

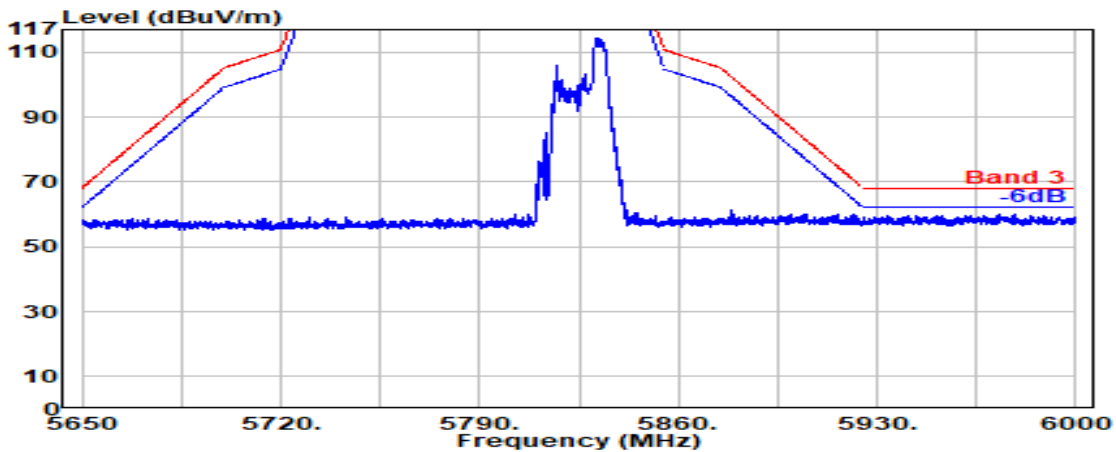


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

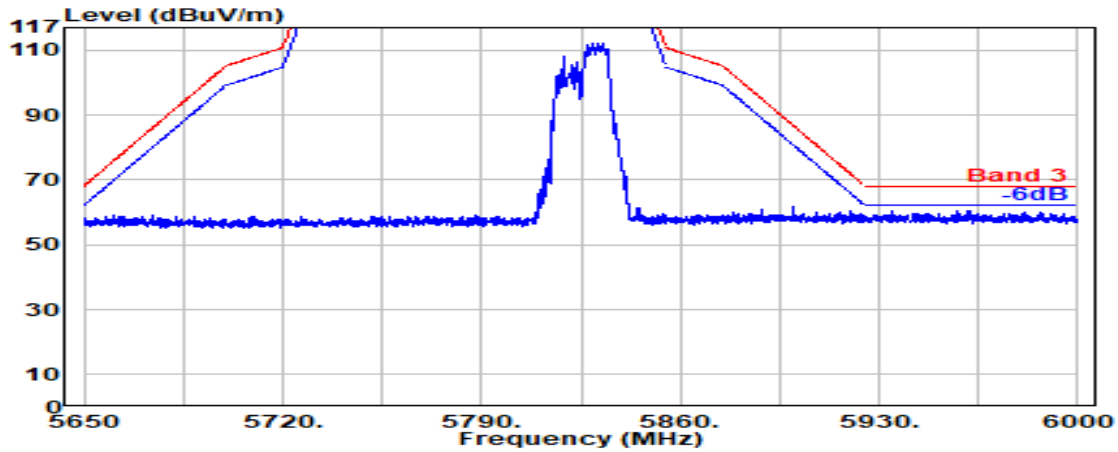

Antenna at Vertical Polarization

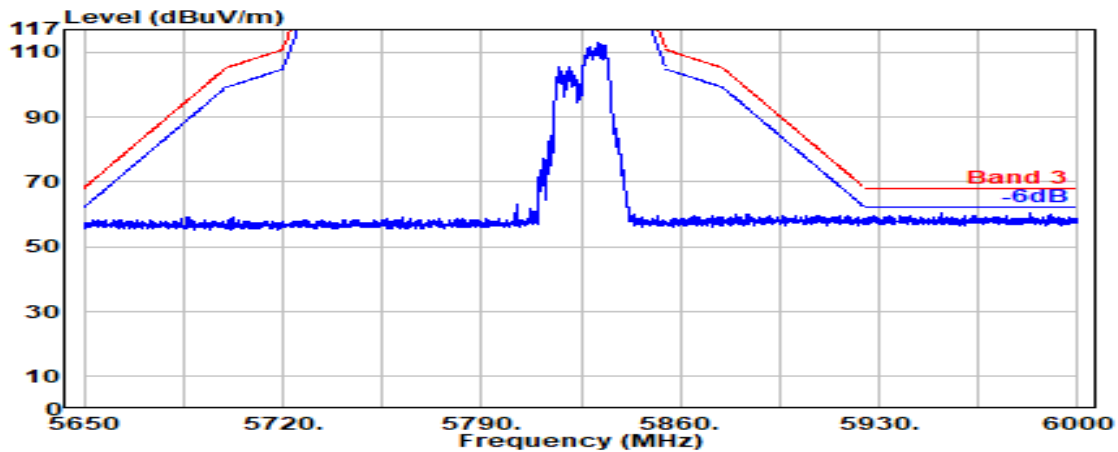


Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

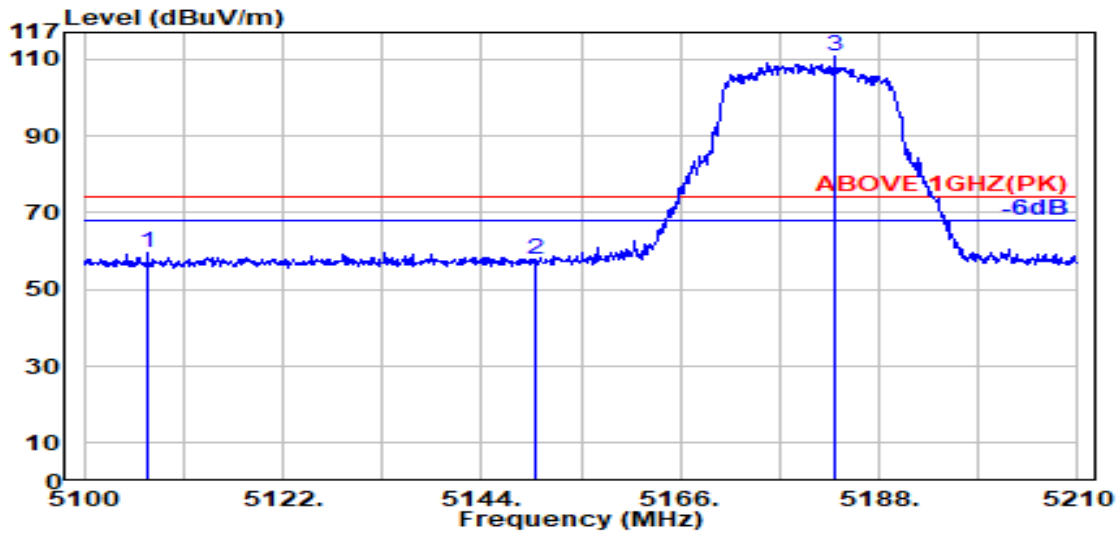

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.000	33.41	8.33	39.20	57.18	59.73	74.00	14.27	Peak
5150.000	33.50	8.37	39.19	55.37	58.05	74.00	15.95	Peak
@ 5183.100	33.70	8.41	39.19	108.08	110.99	---	---	Peak

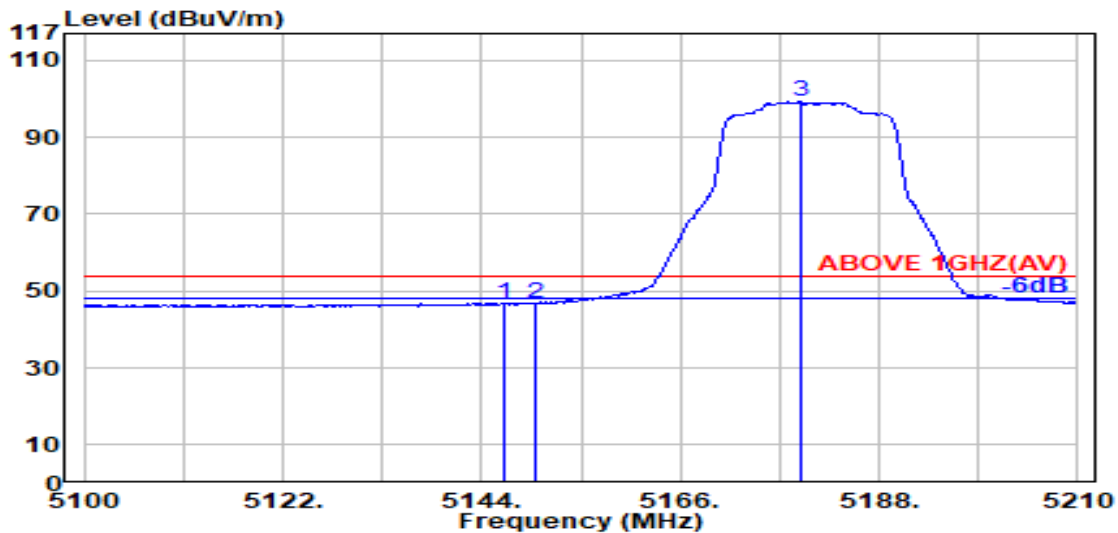


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.400	33.49	8.37	39.19	44.24	46.91	54.00	7.09	Average
5150.000	33.50	8.37	39.19	44.12	46.80	54.00	7.20	Average
@ 5179.300	33.68	8.40	39.19	96.37	99.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

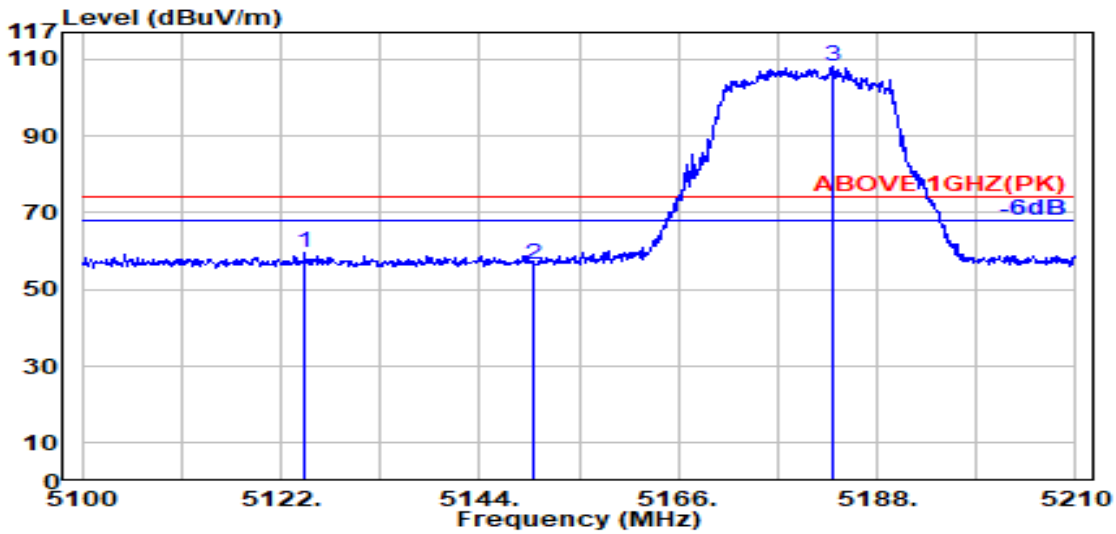

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.700	33.45	8.35	39.19	57.12	59.72	74.00	14.28	Peak
5150.000	33.50	8.37	39.19	53.92	56.60	74.00	17.40	Peak
@ 5183.000	33.70	8.41	39.19	105.16	108.08	---	---	Peak

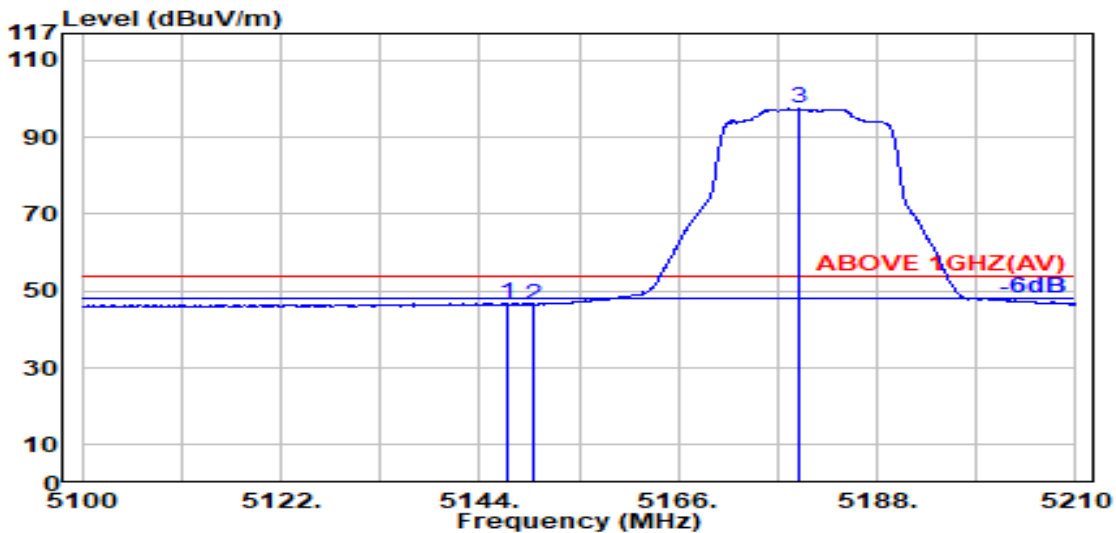

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.49	8.37	39.19	44.15	46.83	54.00	7.17	Average
5150.000	33.50	8.37	39.19	43.87	46.56	54.00	7.44	Average
@ 5179.300	33.68	8.40	39.19	94.48	97.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

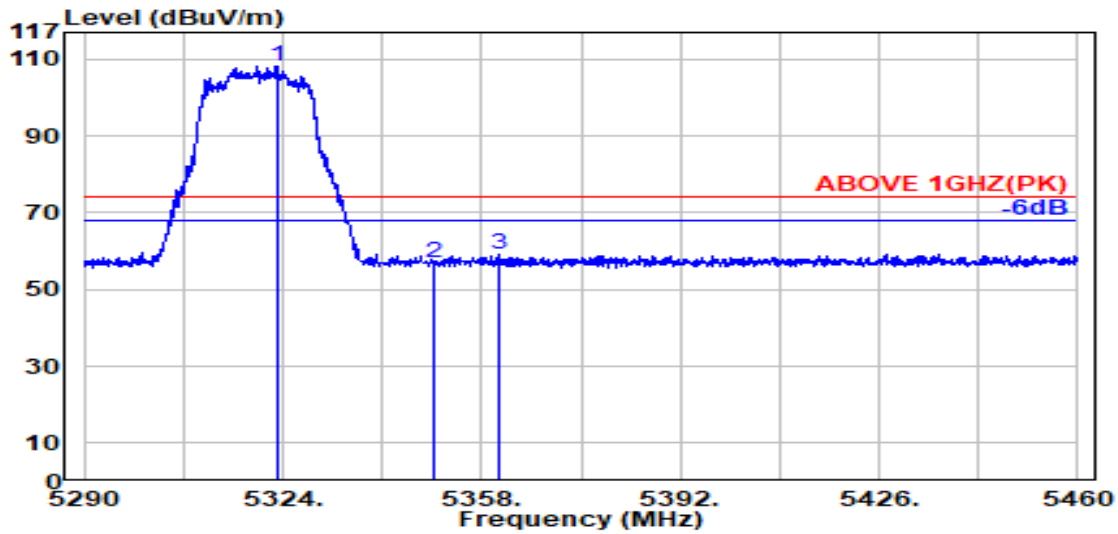

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.100	33.75	8.55	39.17	105.21	108.33	---	---	Peak
5350.000	33.70	8.57	39.17	54.06	57.17	74.00	16.83	Peak
5360.800	33.74	8.58	39.17	55.89	59.05	74.00	14.95	Peak

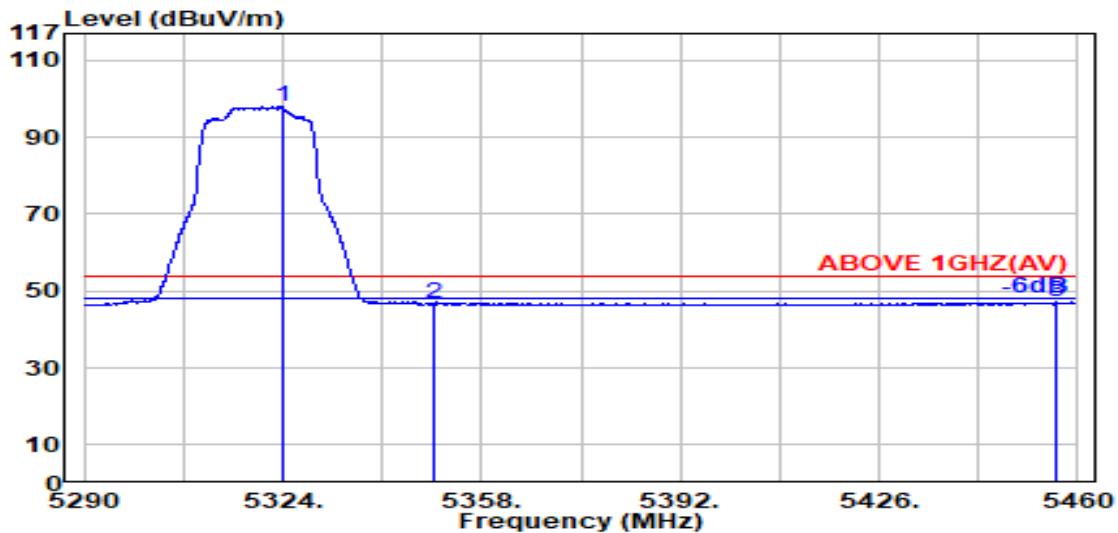

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	33.75	8.55	39.17	94.73	97.86	---	---	Average
5350.000	33.70	8.57	39.17	43.56	46.66	54.00	7.34	Average
5456.200	34.01	8.67	39.16	43.65	47.18	54.00	6.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

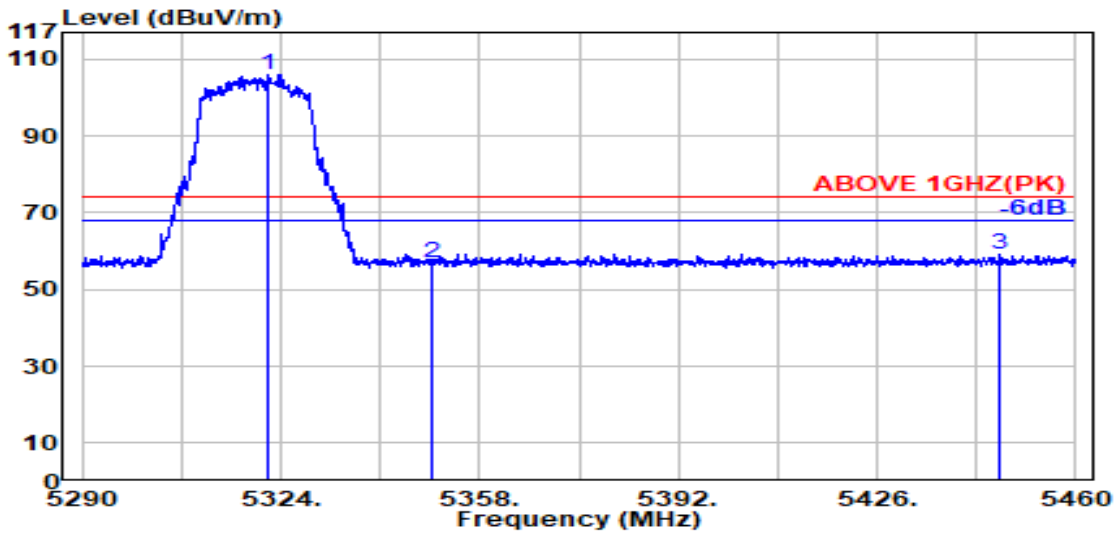

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.000	33.76	8.55	39.17	102.85	105.98	---	---	Peak
5350.000	33.70	8.57	39.17	53.68	56.78	74.00	17.22	Peak
5447.100	33.99	8.67	39.16	55.83	59.33	74.00	14.67	Peak

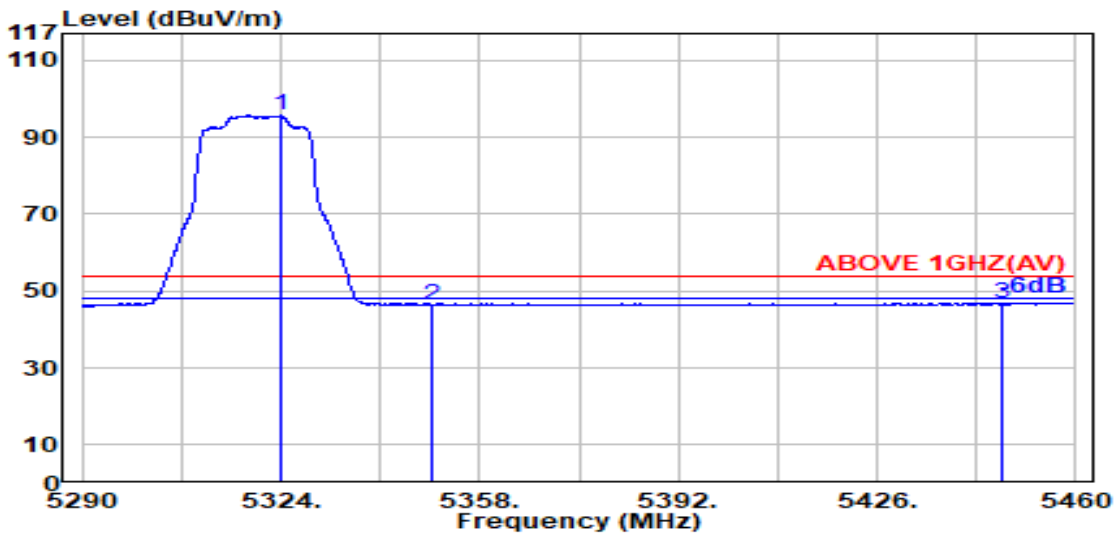


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.200	33.75	8.55	39.17	92.57	95.70	---	---	Average
5350.000	33.70	8.57	39.17	43.17	46.28	54.00	7.72	Average
5447.500	34.00	8.67	39.16	43.48	46.99	54.00	7.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

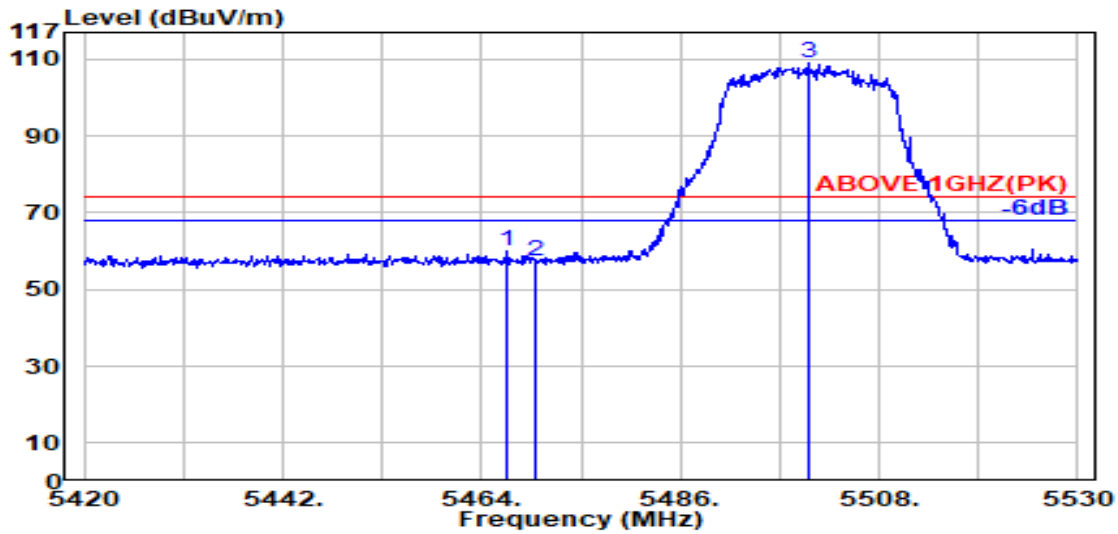

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.03	8.68	39.15	56.55	60.12	74.00	13.88	Peak
5470.000	34.04	8.69	39.15	53.80	57.38	74.00	16.62	Peak
@ 5500.200	34.10	8.72	39.15	105.54	109.20	---	---	Peak

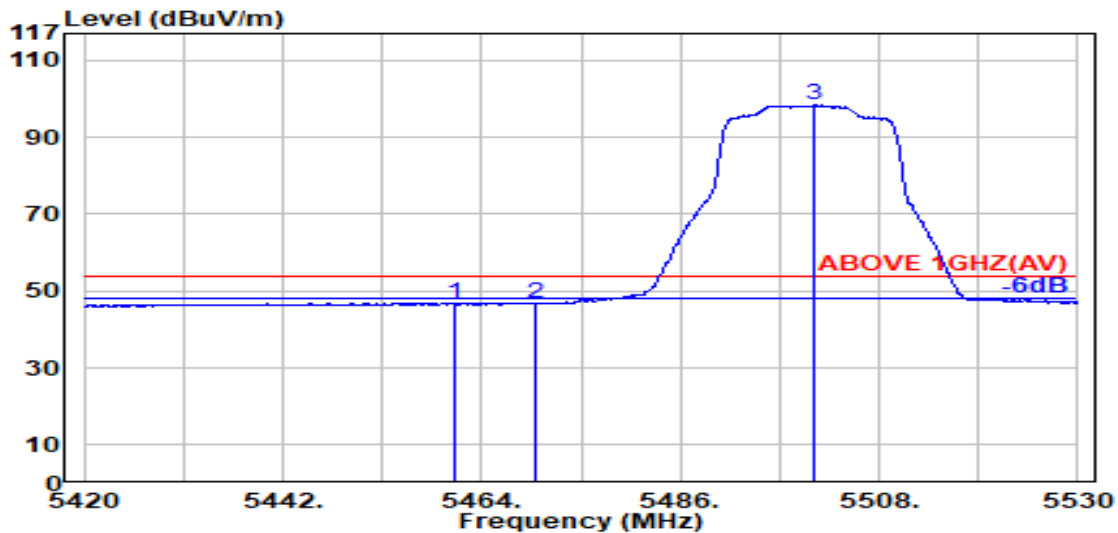


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.900	34.02	8.68	39.15	43.47	47.02	54.00	6.98	Average
5470.000	34.04	8.69	39.15	43.29	46.87	54.00	7.13	Average
@ 5500.900	34.10	8.72	39.15	94.69	98.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

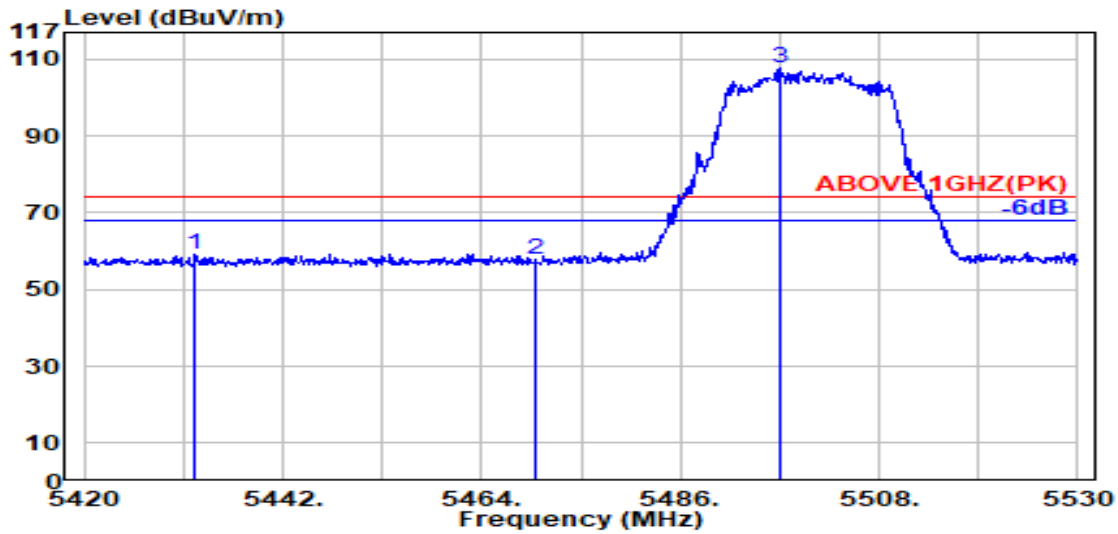

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.300	33.96	8.65	39.16	55.83	59.29	74.00	14.71	Peak
5470.000	34.04	8.69	39.15	54.32	57.89	74.00	16.11	Peak
@ 5497.100	34.09	8.71	39.15	103.91	107.56	---	---	Peak

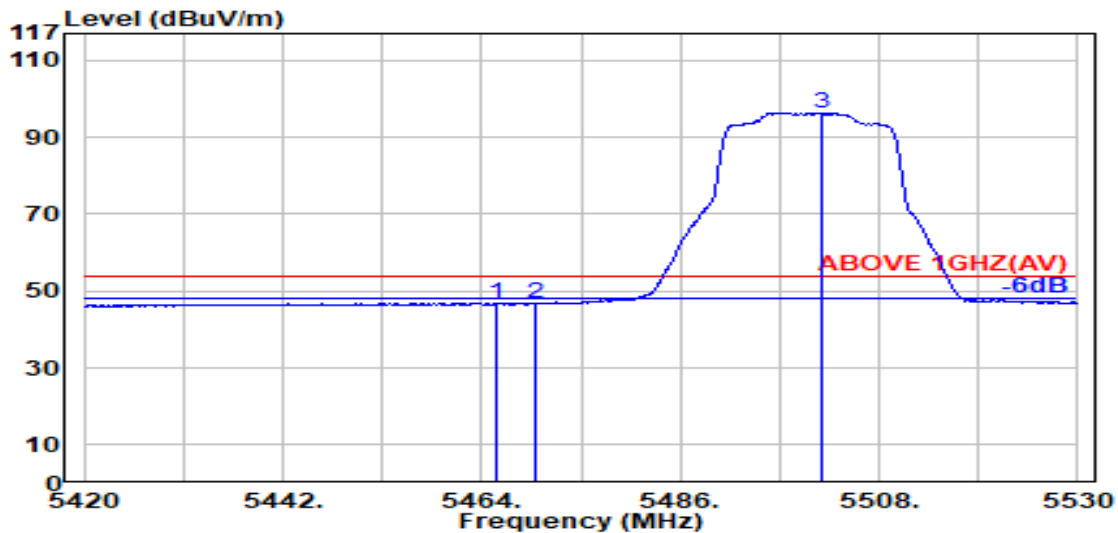

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.03	8.68	39.15	43.26	46.83	54.00	7.17	Average
5470.000	34.04	8.69	39.15	43.15	46.73	54.00	7.27	Average
@ 5501.600	34.10	8.72	39.15	92.78	96.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

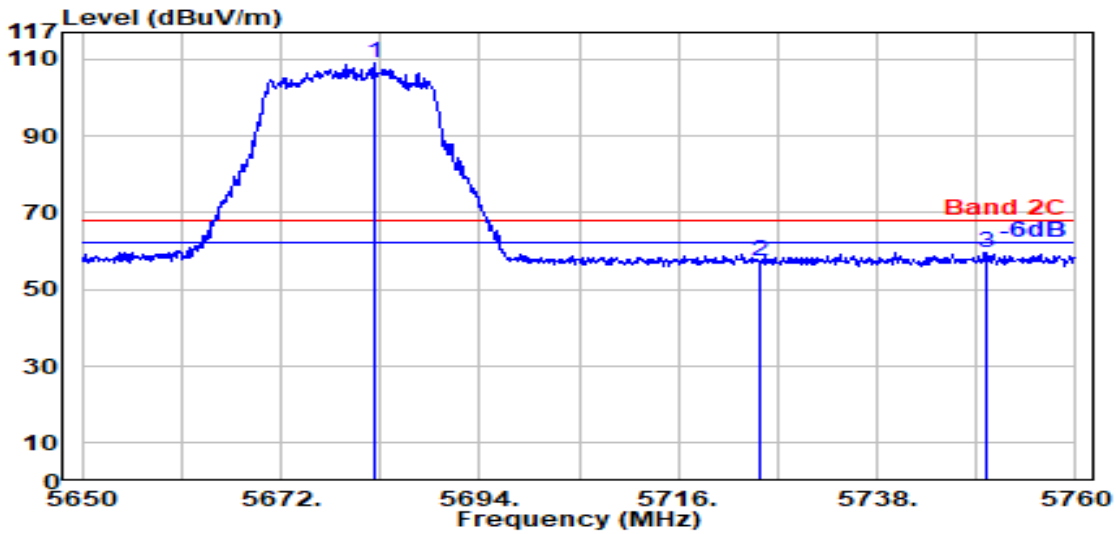

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.300	33.67	8.89	39.19	105.85	109.22	---	---	Peak
5725.000	33.60	8.93	39.20	54.27	57.60	68.20	10.60	Peak
5750.200	33.60	8.95	39.20	56.07	59.42	68.20	8.78	Peak

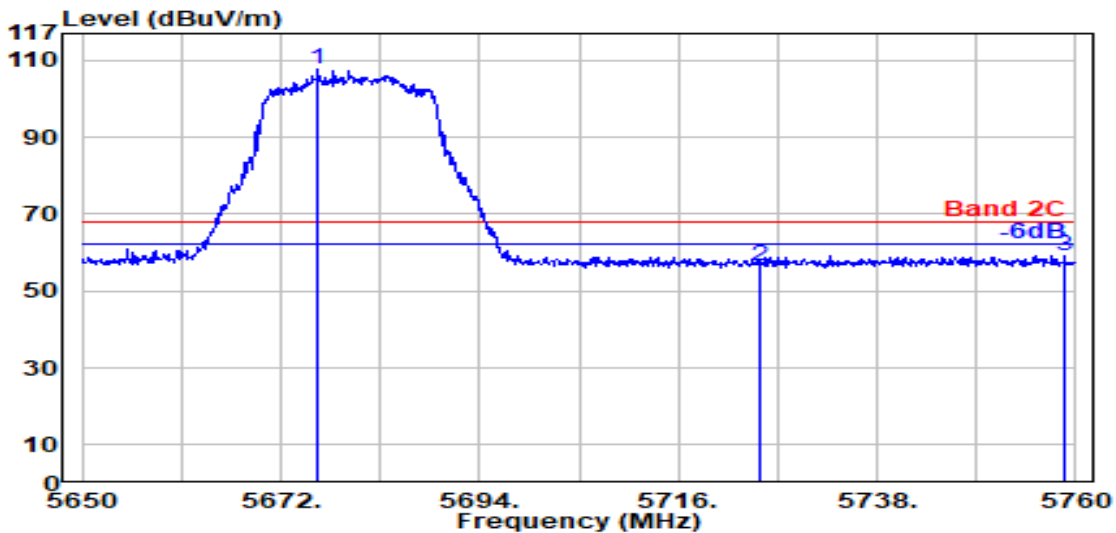


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.100	33.70	8.88	39.19	104.29	107.68	---	---	Peak
5725.000	33.60	8.93	39.20	53.38	56.71	68.20	11.49	Peak
5758.700	33.63	8.96	39.20	55.79	59.18	68.20	9.02	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

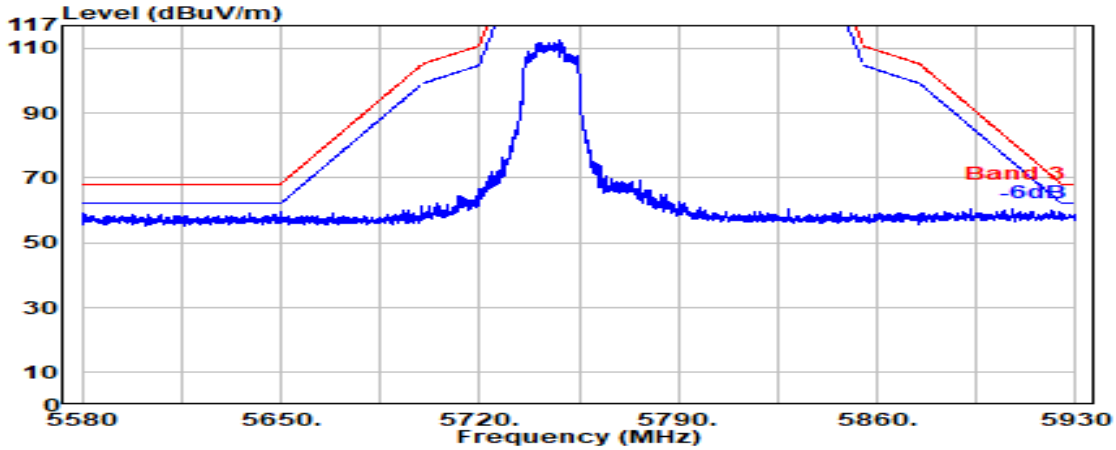


Antenna at Vertical Polarization

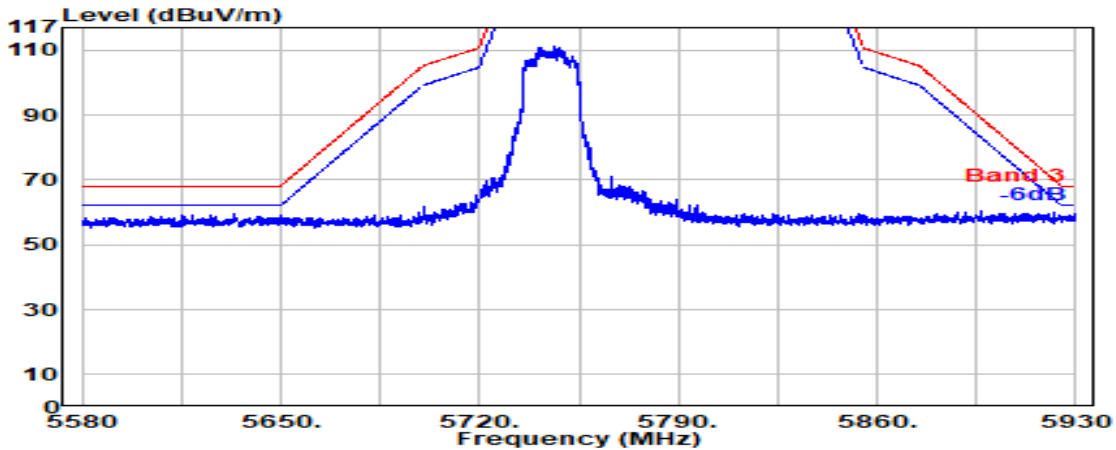


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

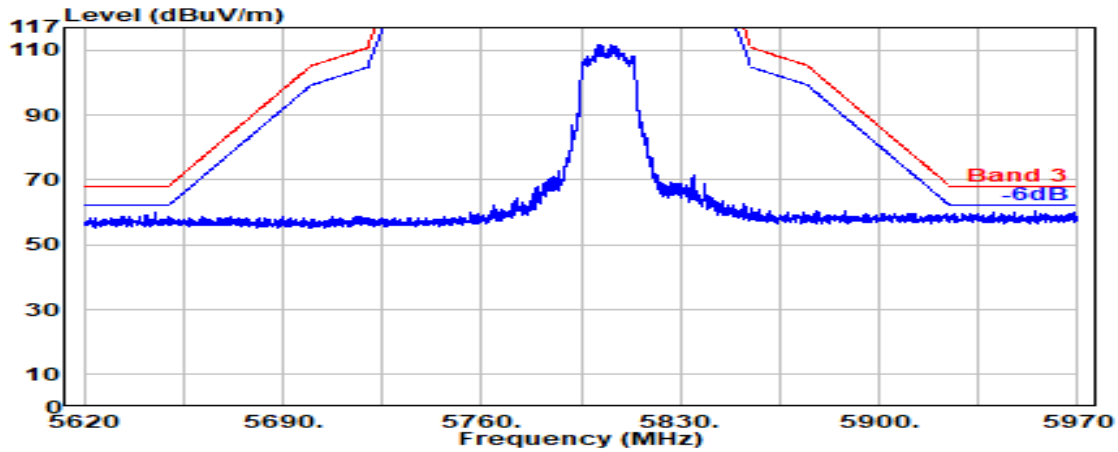

Antenna at Vertical Polarization

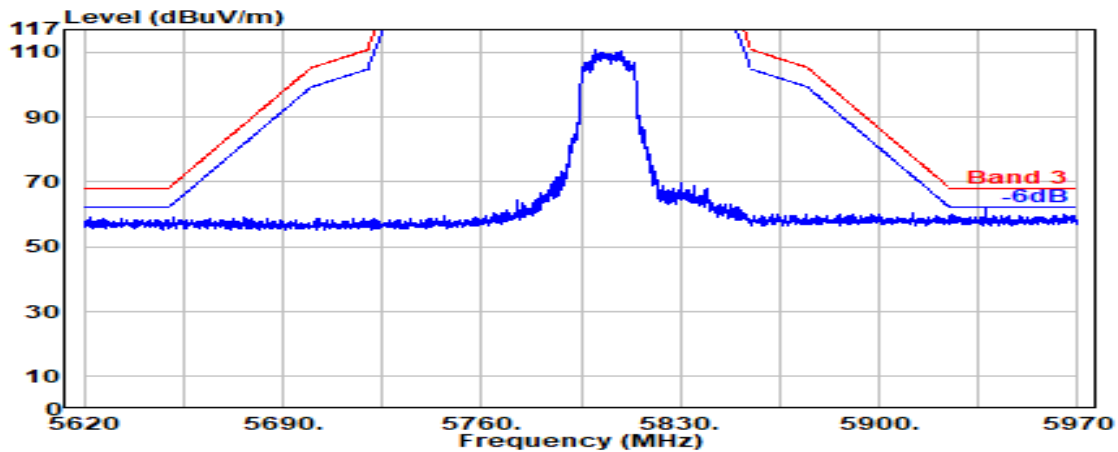


Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

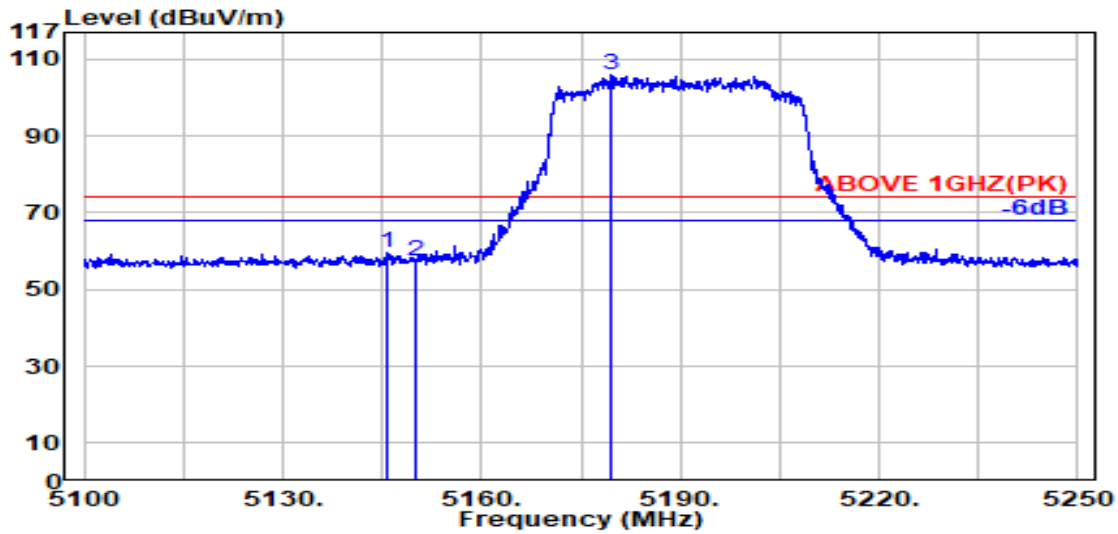

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	33.49	8.37	39.19	56.81	59.48	74.00	14.52	Peak
5150.000	33.50	8.37	39.19	54.88	57.57	74.00	16.43	Peak
@ 5179.500	33.68	8.40	39.19	103.20	106.09	---	---	Peak

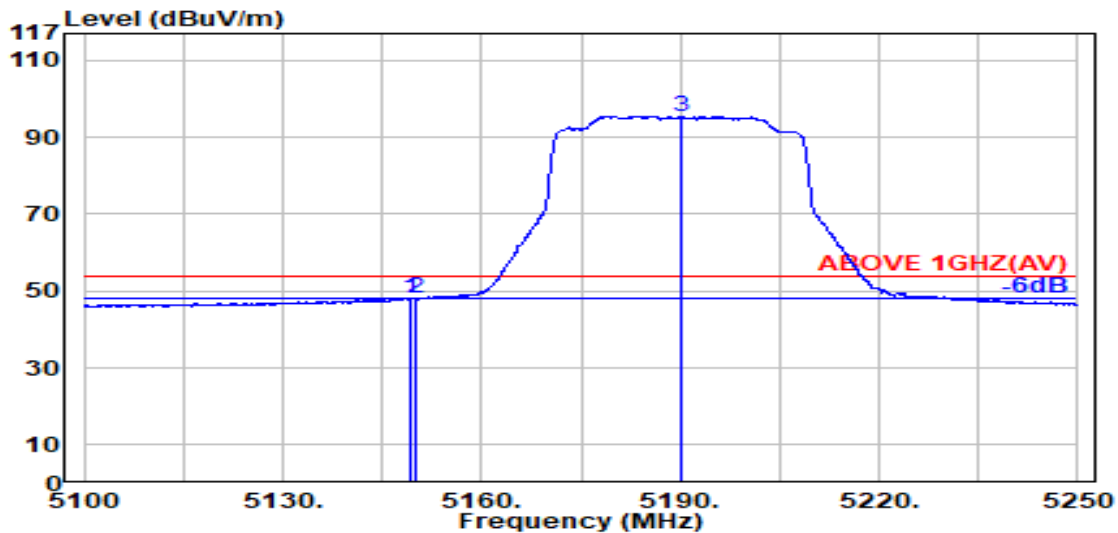


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	45.58	48.26	54.00	5.74	Average
5150.000	33.50	8.37	39.19	45.63	48.31	54.00	5.69	Average
@ 5190.200	33.74	8.41	39.19	92.54	95.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

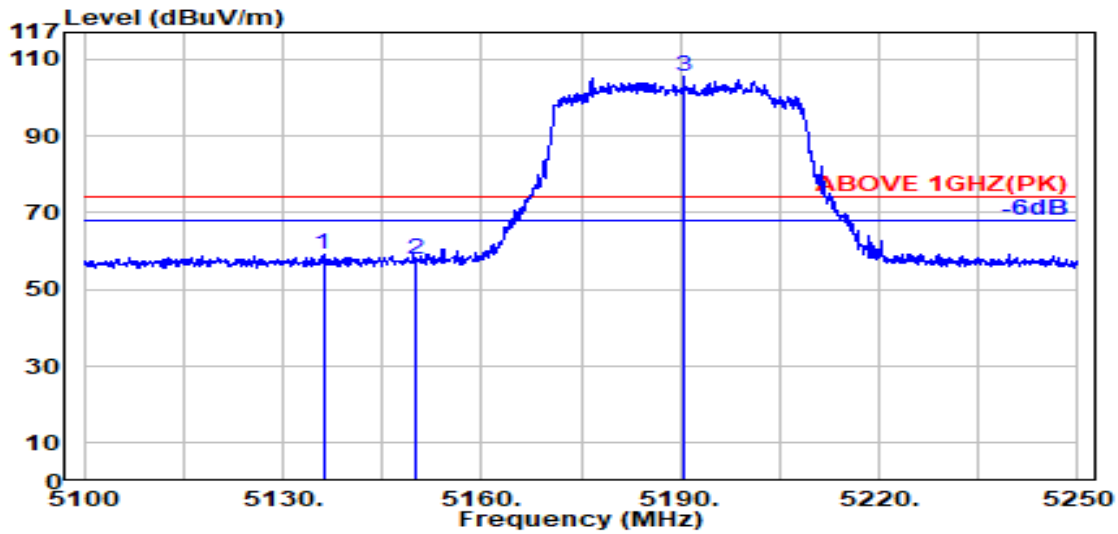

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.100	33.47	8.36	39.19	56.74	59.38	74.00	14.62	Peak
5150.000	33.50	8.37	39.19	55.28	57.96	74.00	16.04	Peak
@ 5190.500	33.74	8.41	39.19	102.43	105.40	---	---	Peak

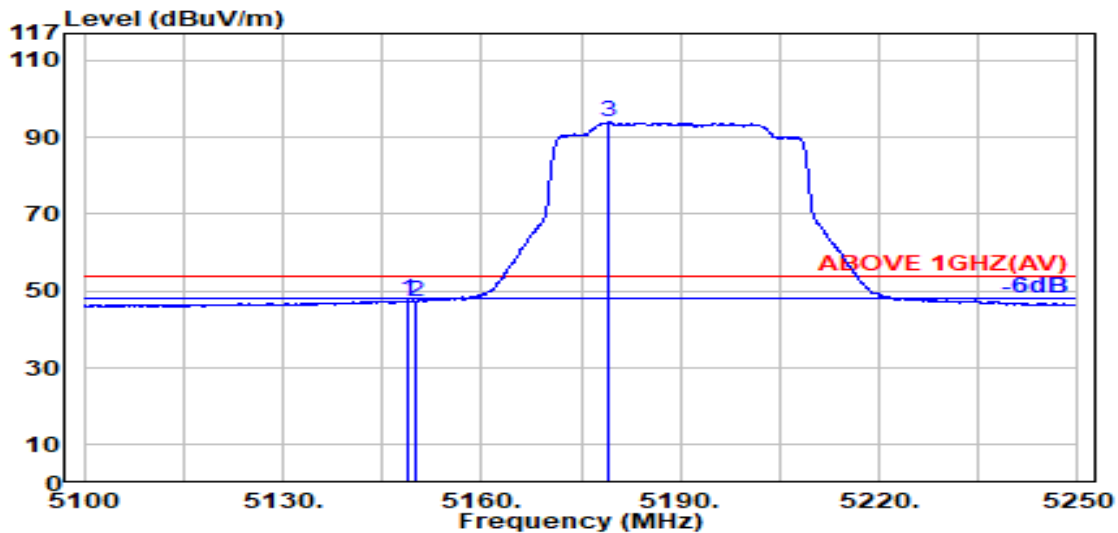

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.19	44.93	47.61	54.00	6.39	Average
5150.000	33.50	8.37	39.19	44.75	47.44	54.00	6.56	Average
@ 5179.200	33.68	8.40	39.19	90.98	93.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

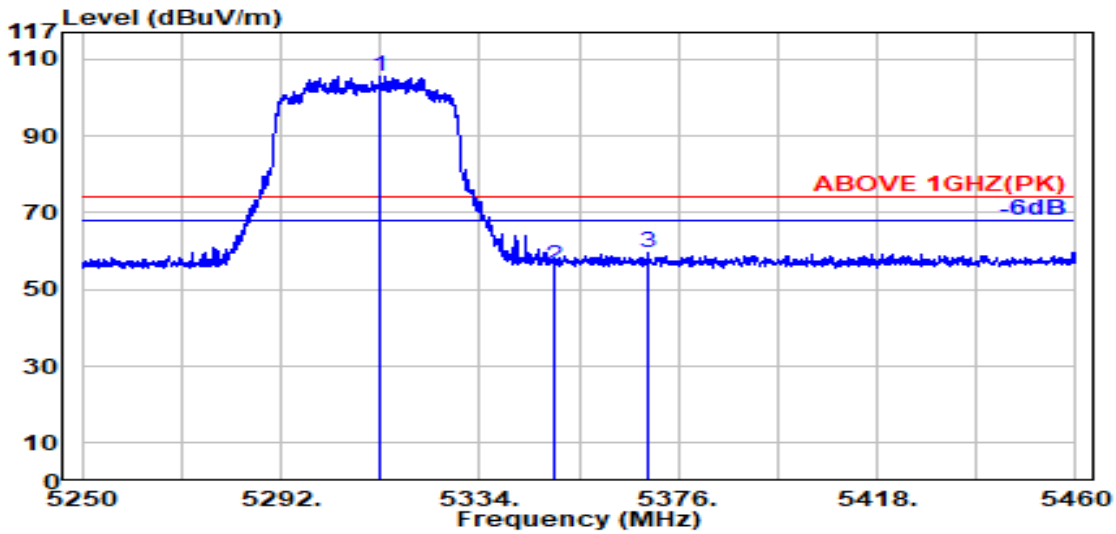

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.000	33.77	8.54	39.17	102.33	105.46	---	---	Peak
5350.000	33.70	8.57	39.17	53.11	56.21	74.00	17.79	Peak
5369.700	33.78	8.59	39.17	56.27	59.48	74.00	14.52	Peak

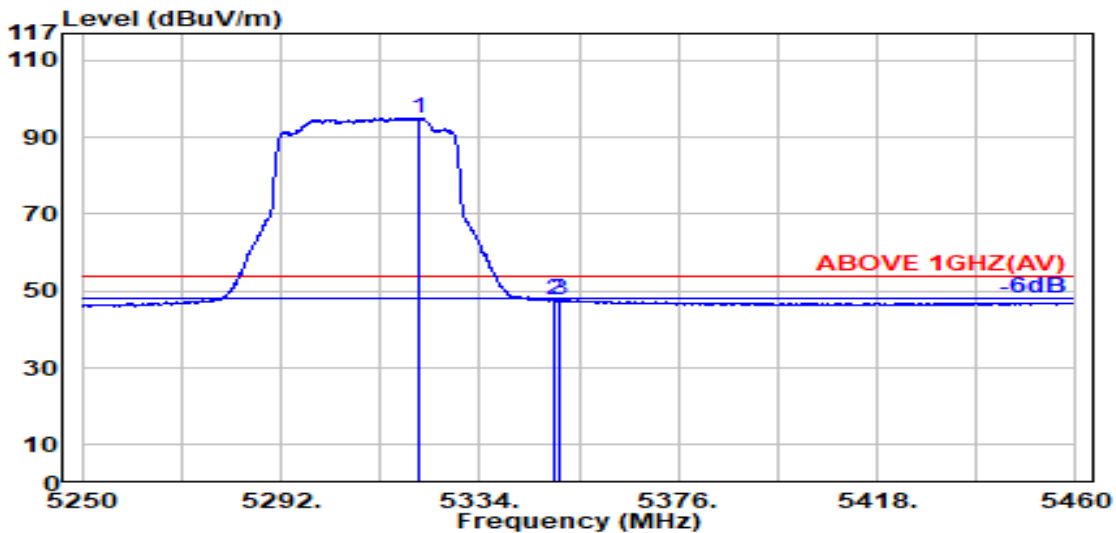

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.000	33.76	8.54	39.17	91.80	94.93	---	---	Average
5350.000	33.70	8.57	39.17	44.50	47.61	54.00	6.39	Average
5350.900	33.70	8.57	39.17	44.47	47.58	54.00	6.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

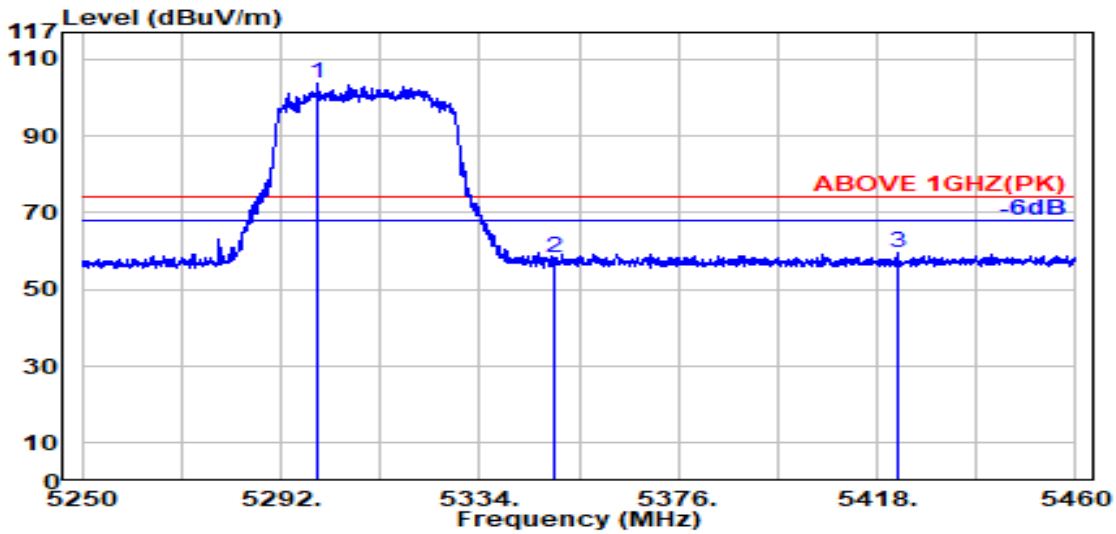

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.700	33.80	8.52	39.17	100.51	103.66	---	---	Peak
5350.000	33.70	8.57	39.17	55.24	58.34	74.00	15.66	Peak
5422.500	33.95	8.64	39.16	56.29	59.72	74.00	14.28	Peak

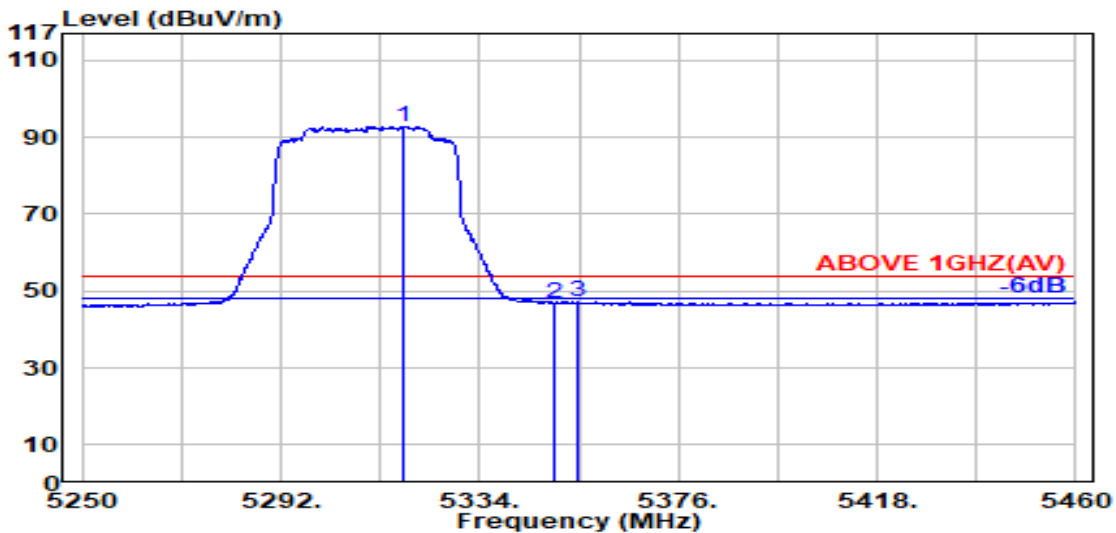

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.700	33.76	8.54	39.17	89.74	92.88	---	---	Average
5350.000	33.70	8.57	39.17	43.70	46.80	54.00	7.20	Average
5354.800	33.72	8.58	39.17	44.24	47.37	54.00	6.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

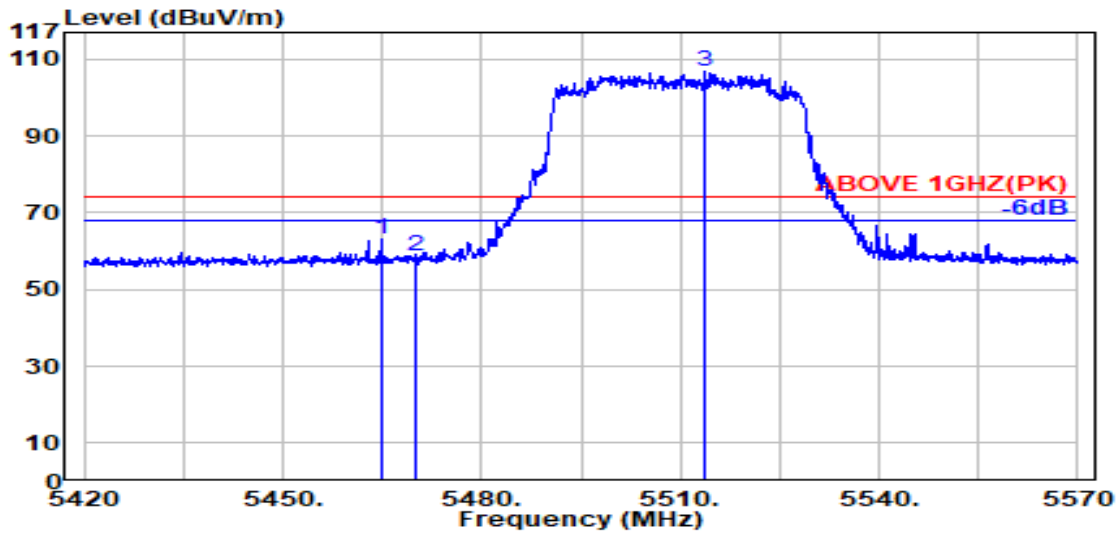

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.800	34.03	8.68	39.15	59.40	62.96	74.00	11.04	Peak
5470.000	34.04	8.69	39.15	55.37	58.94	74.00	15.06	Peak
@ 5513.700	34.07	8.73	39.15	103.26	106.91	---	---	Peak

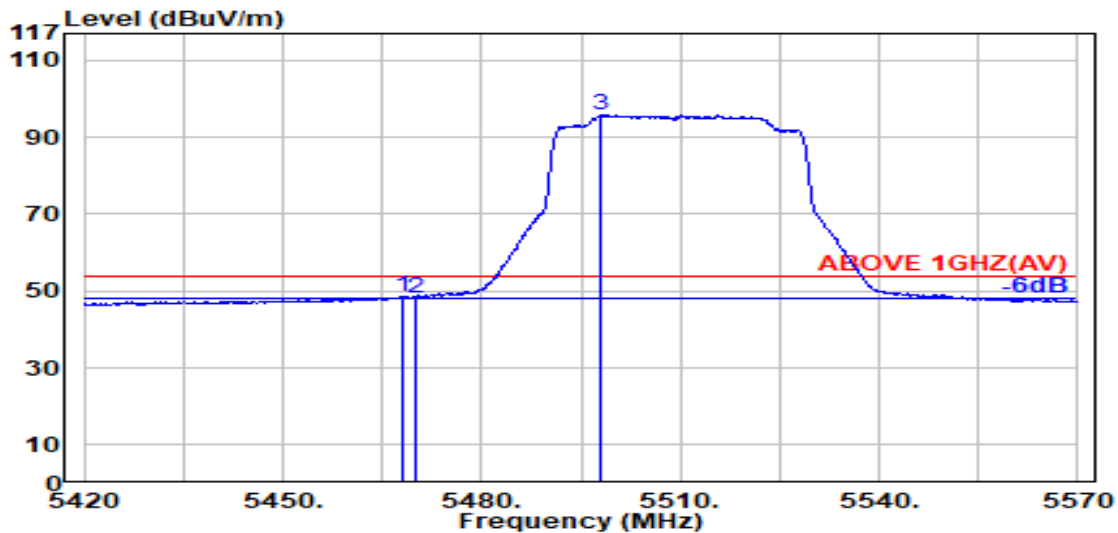


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	44.96	48.53	54.00	5.47	Average
5470.000	34.04	8.69	39.15	44.72	48.29	54.00	5.71	Average
@ 5498.100	34.10	8.71	39.15	92.22	95.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

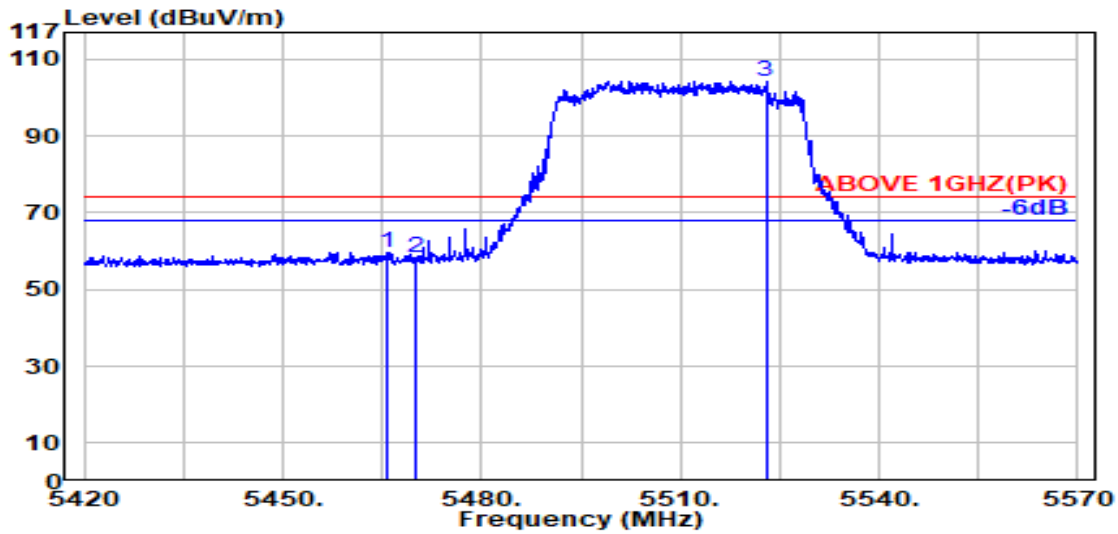

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.03	8.68	39.15	56.06	59.62	74.00	14.38	Peak
5470.000	34.04	8.69	39.15	54.53	58.11	74.00	15.89	Peak
@ 5522.900	34.05	8.74	39.15	100.66	104.30	---	---	Peak

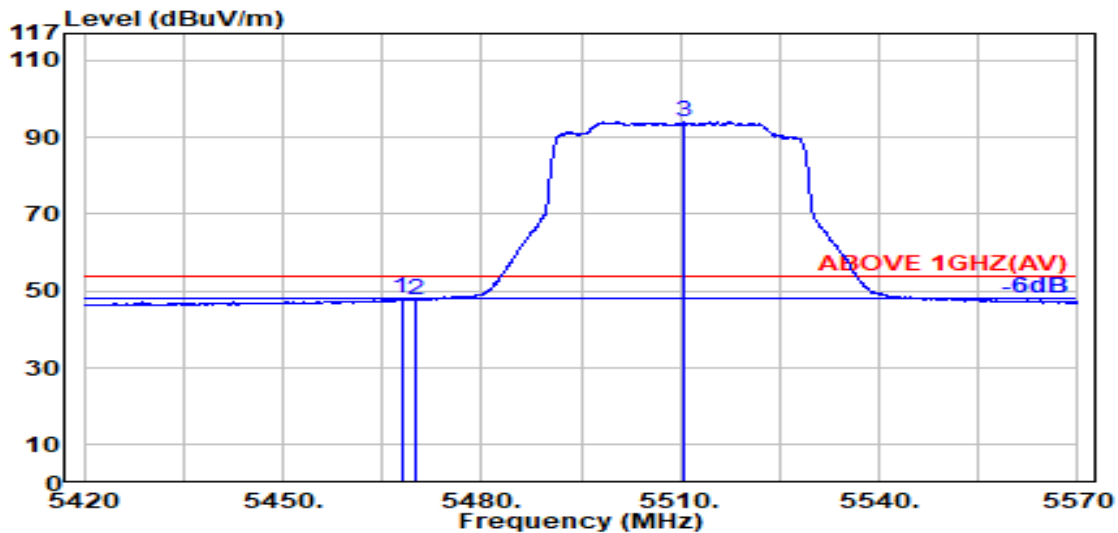


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.69	39.15	44.35	47.92	54.00	6.08	Average
5470.000	34.04	8.69	39.15	44.23	47.81	54.00	6.19	Average
@ 5510.400	34.08	8.73	39.15	90.34	93.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

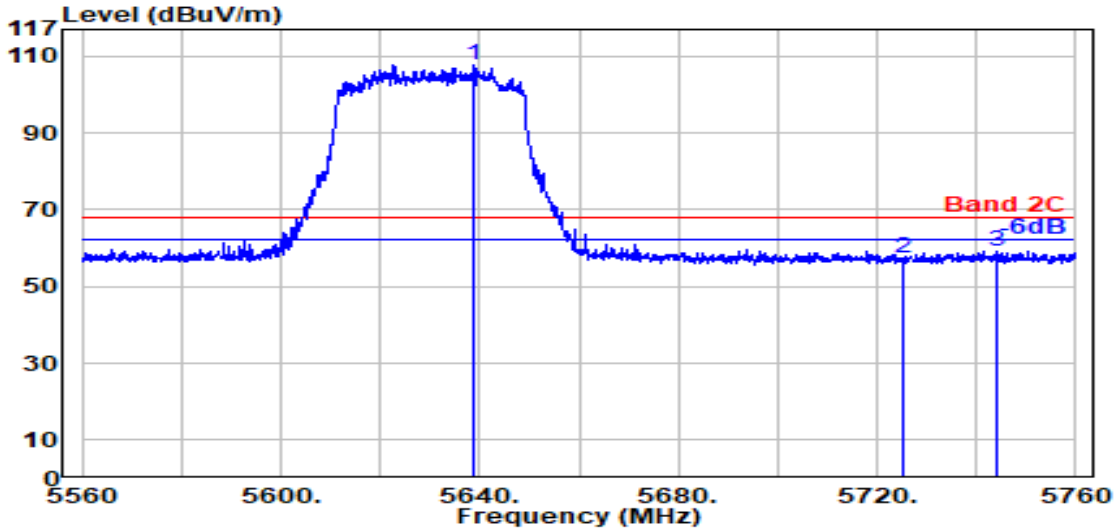

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5639.000	33.80	8.85	39.18	104.09	107.56	---	---	Peak
5725.000	33.60	8.93	39.20	54.26	57.59	68.20	10.61	Peak
5744.000	33.60	8.94	39.20	55.90	59.24	68.20	8.96	Peak

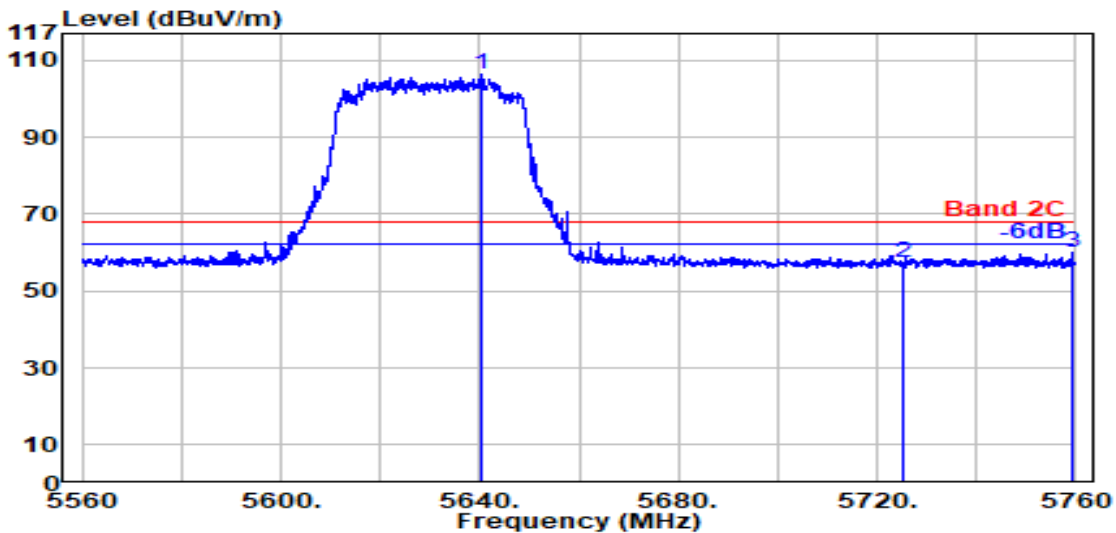


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5640.500	33.80	8.85	39.18	102.72	106.19	---	---	Peak
5725.000	33.60	8.93	39.20	53.90	57.23	68.20	10.97	Peak
5759.400	33.64	8.96	39.20	56.69	60.09	68.20	8.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

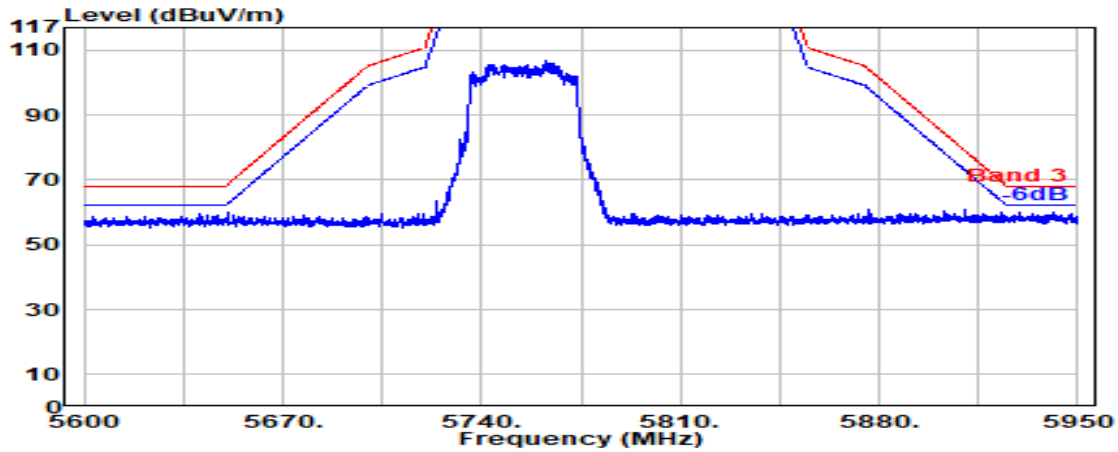


Antenna at Vertical Polarization

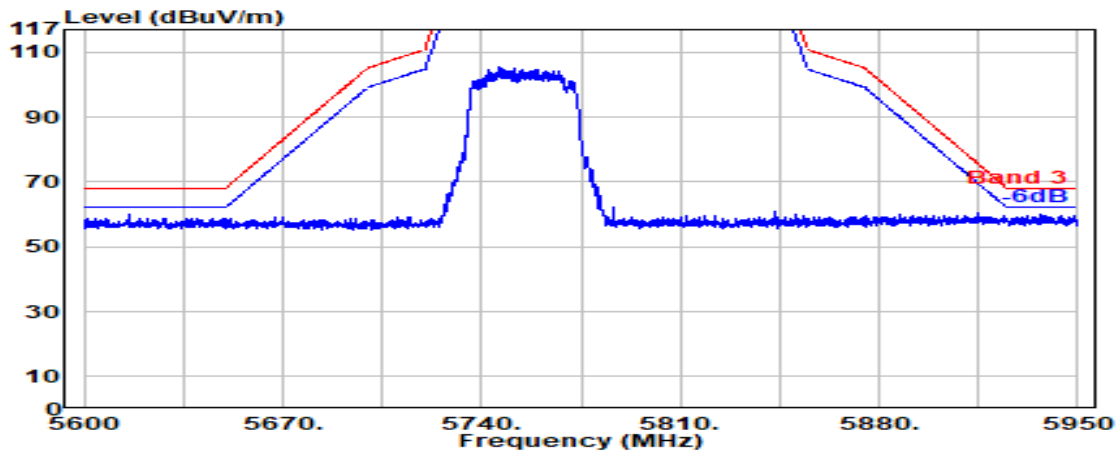


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

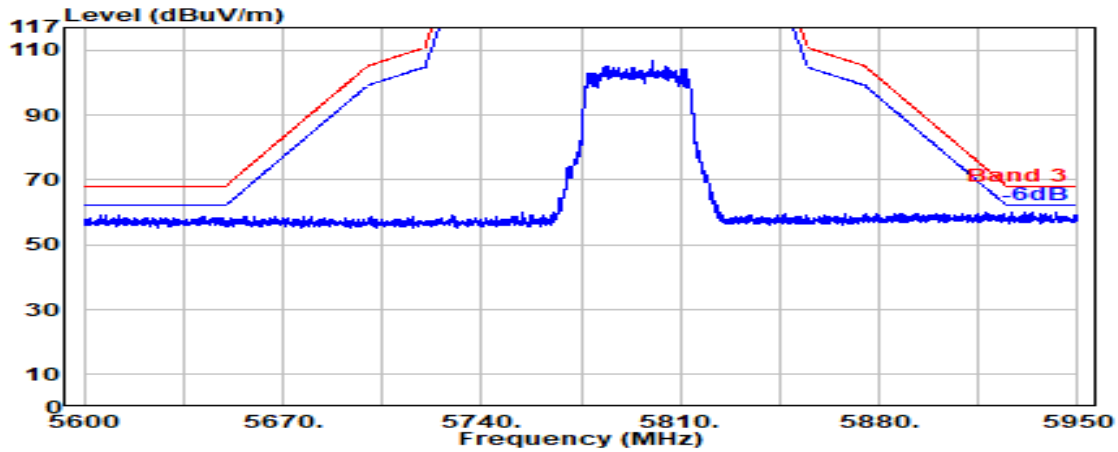

Antenna at Vertical Polarization

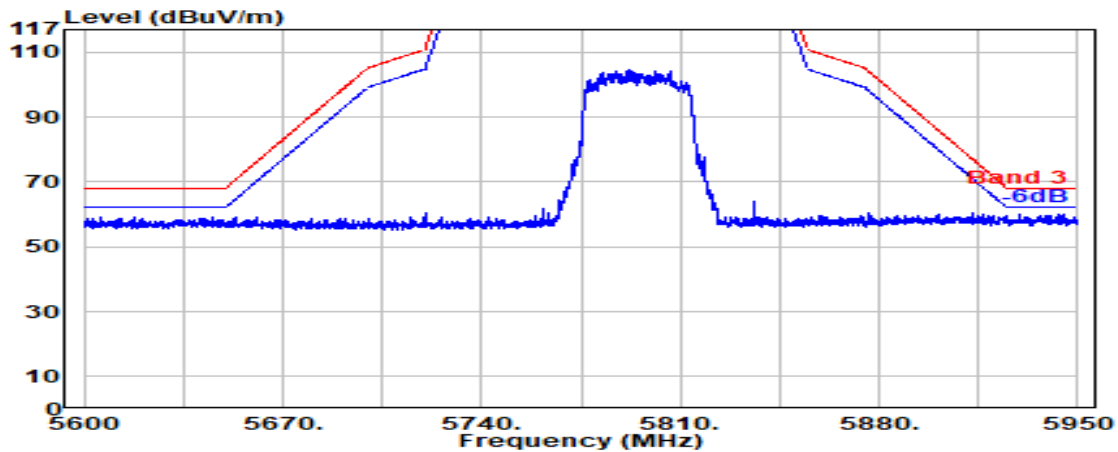


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

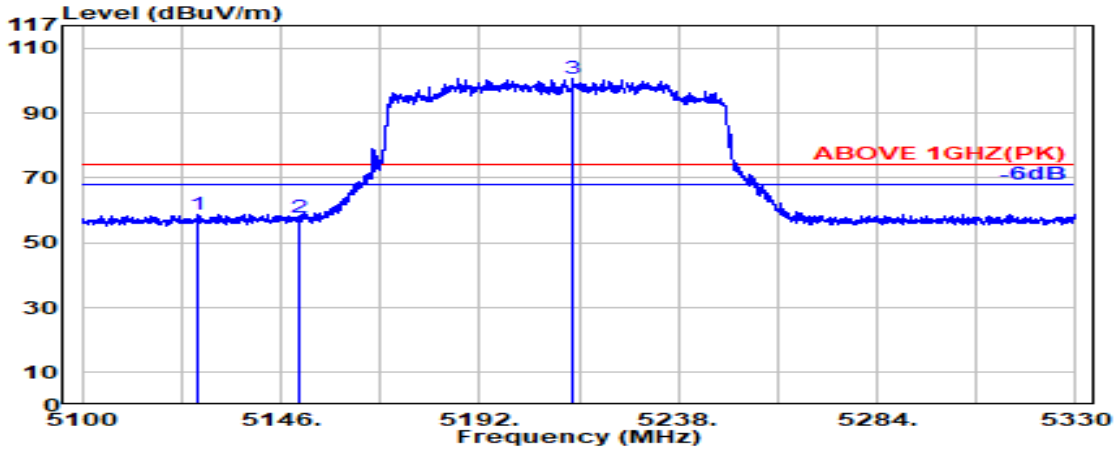

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.600	33.45	8.35	39.19	56.14	58.75	74.00	15.25	Peak
5150.000	33.50	8.37	39.19	55.22	57.90	74.00	16.10	Peak
@ 5213.600	33.77	8.44	39.18	97.46	100.49	---	---	Peak

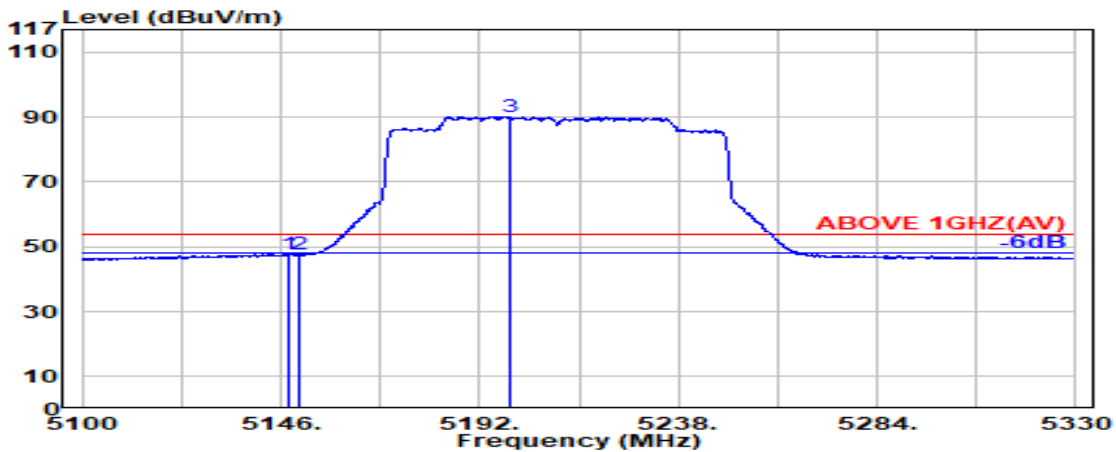


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.50	8.37	39.19	45.15	47.83	54.00	6.17	Average
5150.000	33.50	8.37	39.19	44.97	47.66	54.00	6.34	Average
@ 5199.300	33.80	8.42	39.19	87.25	90.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

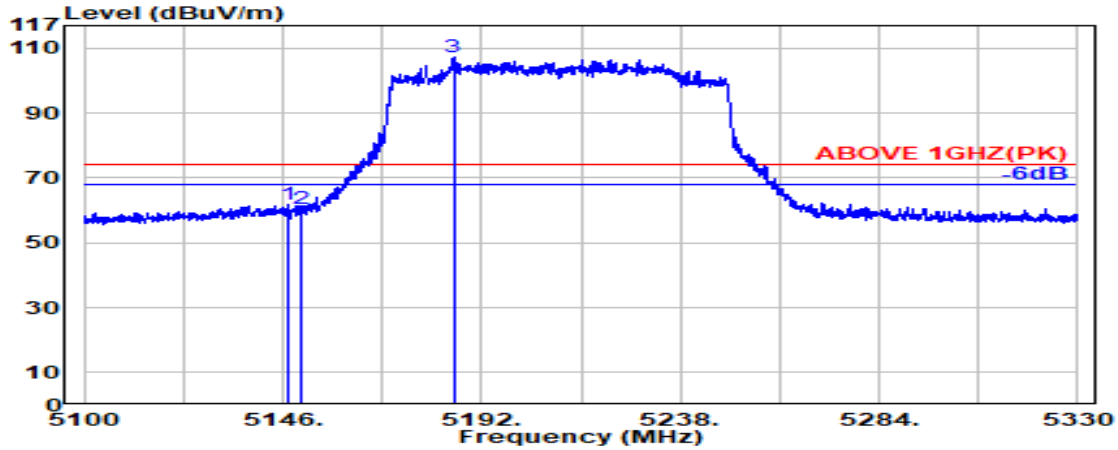

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.49	8.37	39.19	59.27	61.94	74.00	12.06	Peak
5150.000	33.50	8.37	39.19	58.02	60.70	74.00	13.30	Peak
@ 5185.500	33.71	8.41	39.19	104.20	107.14	---	---	Peak

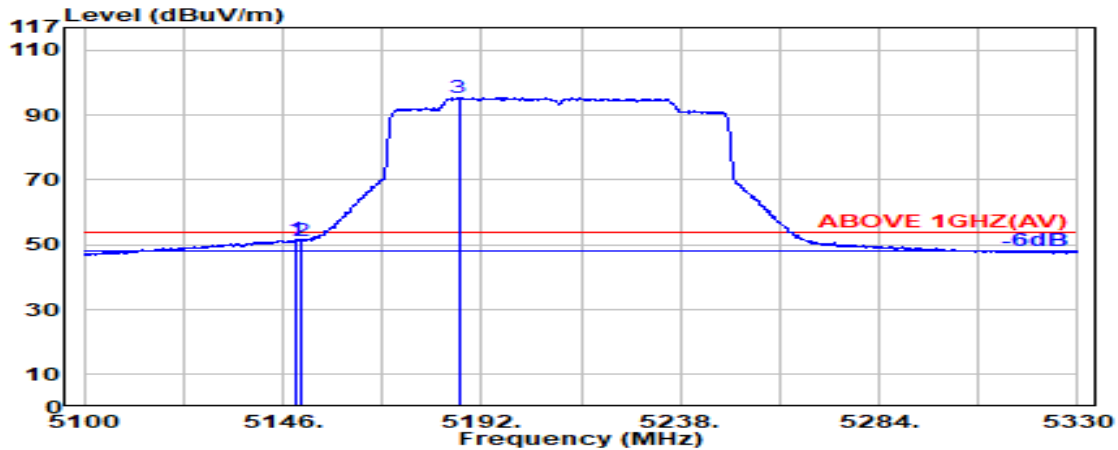


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.19	49.02	51.70	54.00	2.30	Average
5150.000	33.50	8.37	39.19	48.52	51.21	54.00	2.79	Average
@ 5186.700	33.72	8.41	39.19	92.64	95.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

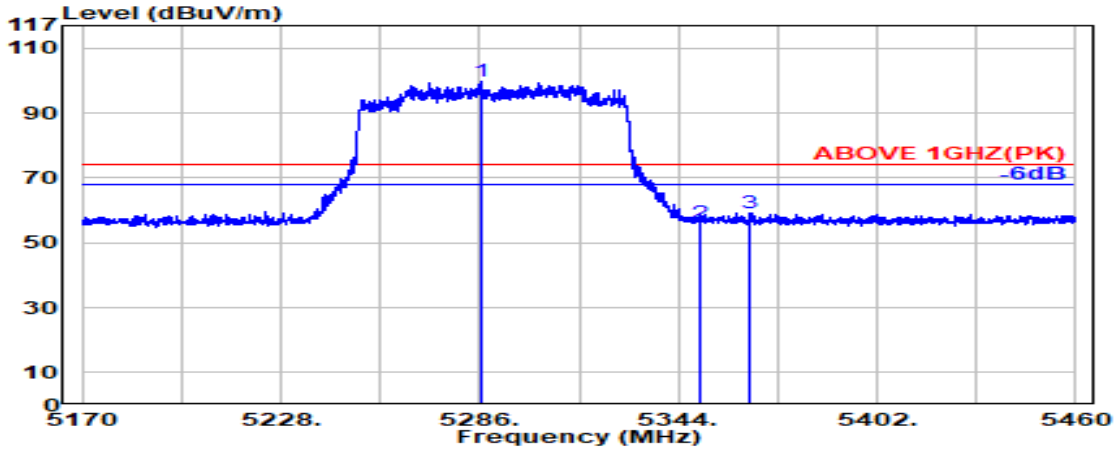

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.700	33.77	8.51	39.17	96.46	99.57	---	---	Peak
5350.000	33.70	8.57	39.17	53.14	56.24	74.00	17.76	Peak
5364.600	33.76	8.59	39.17	56.05	59.23	74.00	14.77	Peak

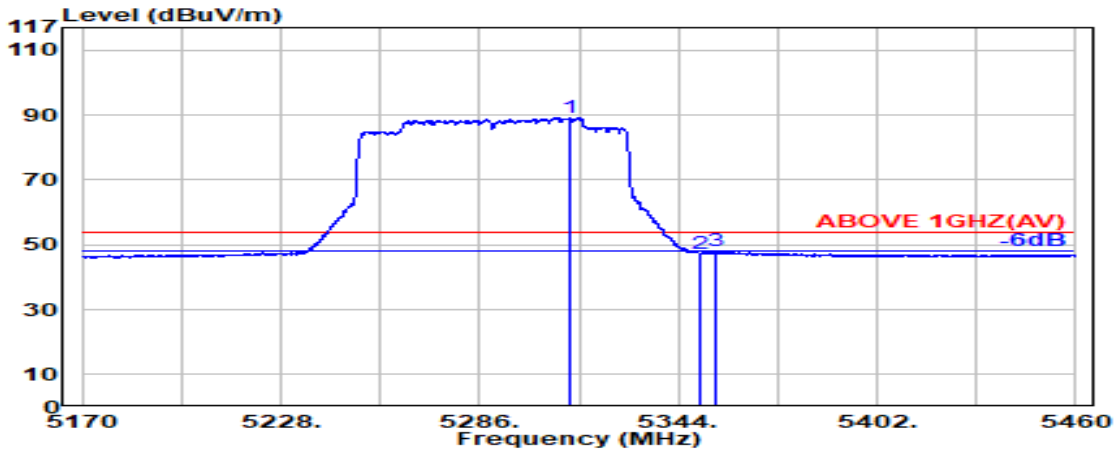

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.200	33.78	8.54	39.17	86.09	89.23	---	---	Average
5350.000	33.70	8.57	39.17	44.36	47.46	54.00	6.54	Average
5355.100	33.72	8.58	39.17	44.80	47.93	54.00	6.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.300	33.77	8.54	39.17	102.09	105.23	---	---	Peak
5350.000	33.70	8.57	39.17	55.24	58.35	74.00	15.65	Peak
5356.100	33.72	8.58	39.17	59.64	62.77	74.00	11.23	Peak

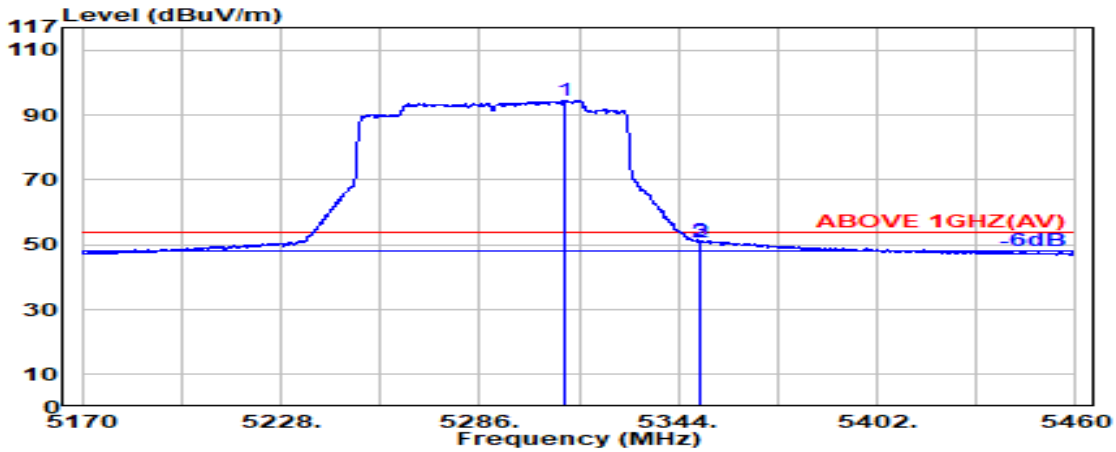


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.000	33.78	8.53	39.17	91.48	94.62	---	---	Average
5350.000	33.70	8.57	39.17	47.69	50.80	54.00	3.20	Average
5350.500	33.70	8.57	39.17	48.03	51.13	54.00	2.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

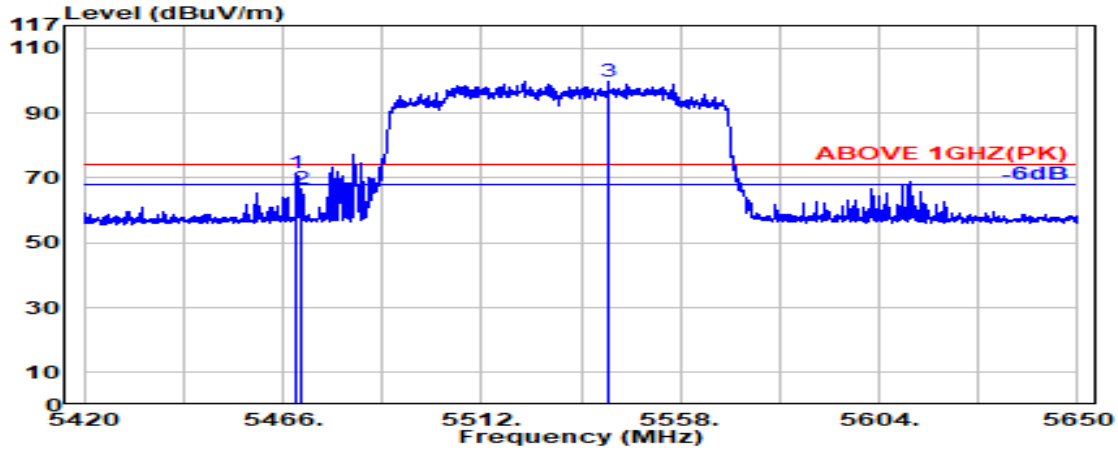

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.04	8.69	39.15	68.16	71.73	74.00	2.27	Peak
5470.000	34.04	8.69	39.15	63.30	66.87	74.00	7.13	Peak
@ 5541.300	34.02	8.76	39.16	96.30	99.91	---	---	Peak

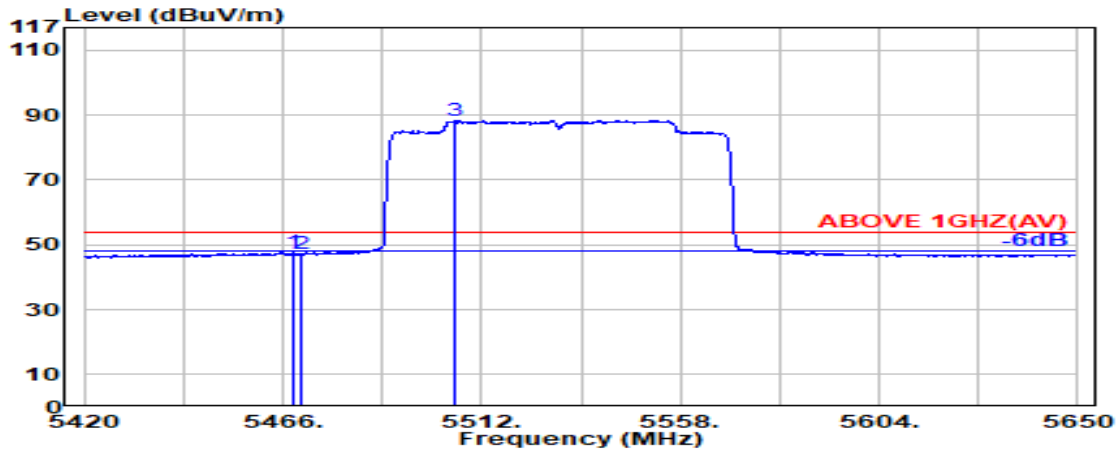


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.15	44.05	47.62	54.00	6.38	Average
5470.000	34.04	8.69	39.15	43.55	47.12	54.00	6.88	Average
@ 5505.600	34.09	8.72	39.15	84.66	88.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

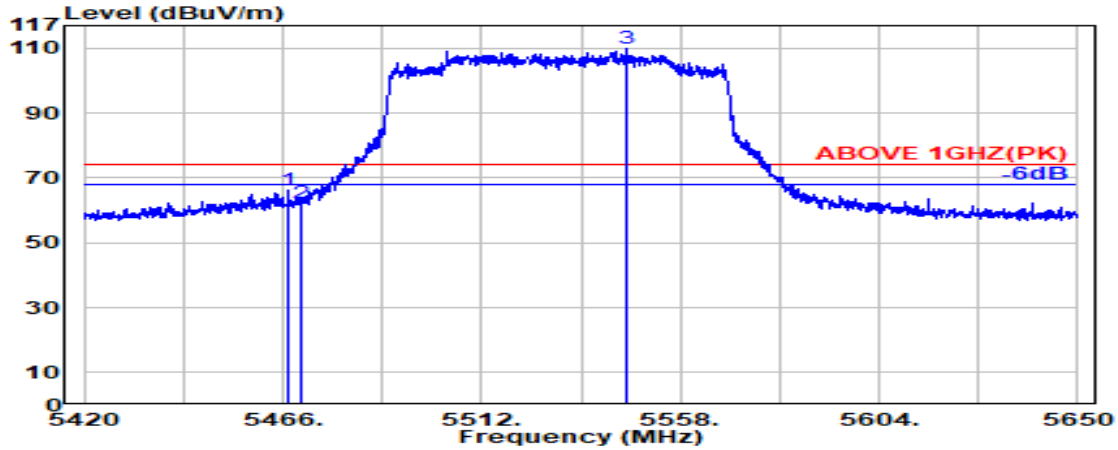

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.15	62.71	66.28	74.00	7.72	Peak
5470.000	34.04	8.69	39.15	58.46	62.03	74.00	11.97	Peak
@ 5545.300	34.01	8.76	39.16	106.30	109.91	---	---	Peak

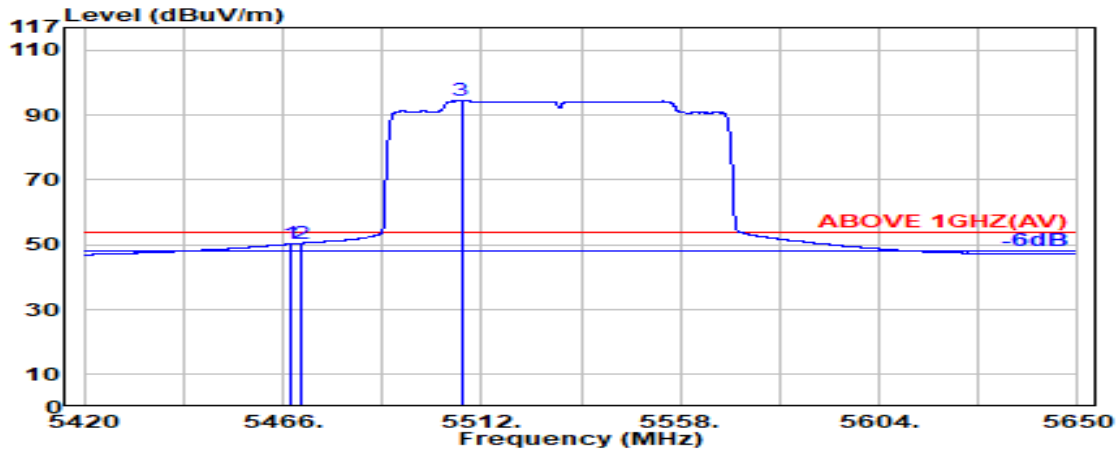


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.15	46.67	50.23	54.00	3.77	Average
5470.000	34.04	8.69	39.15	46.86	50.44	54.00	3.56	Average
@ 5507.300	34.09	8.72	39.15	90.71	94.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

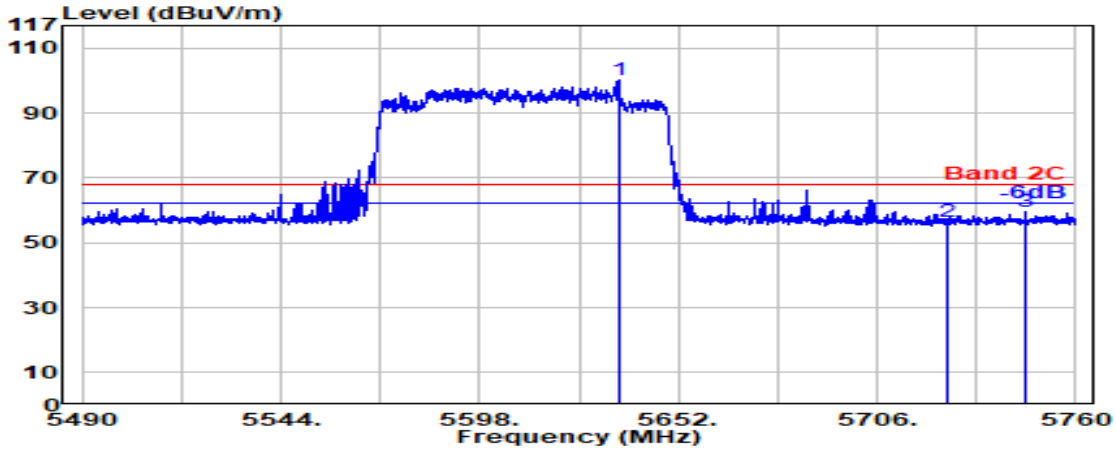

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5635.700	33.80	8.84	39.18	96.70	100.17	---	---	Peak
5725.000	33.60	8.93	39.20	53.07	56.40	68.20	11.80	Peak
5746.400	33.60	8.94	39.20	56.29	59.63	68.20	8.57	Peak

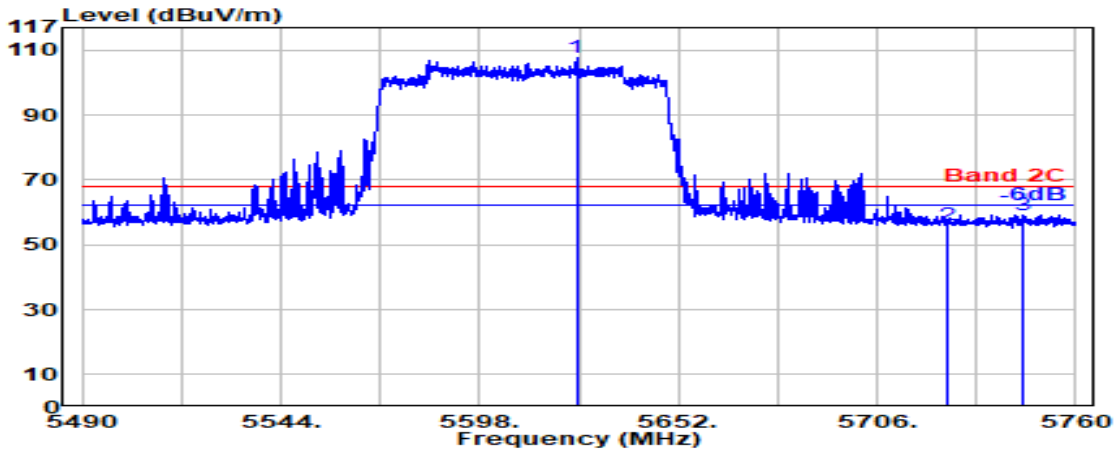

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.300	33.80	8.83	39.18	104.42	107.88	---	---	Peak
5725.000	33.60	8.93	39.20	52.70	56.03	68.20	12.17	Peak
5745.700	33.60	8.94	39.20	55.80	59.14	68.20	9.06	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.