



Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

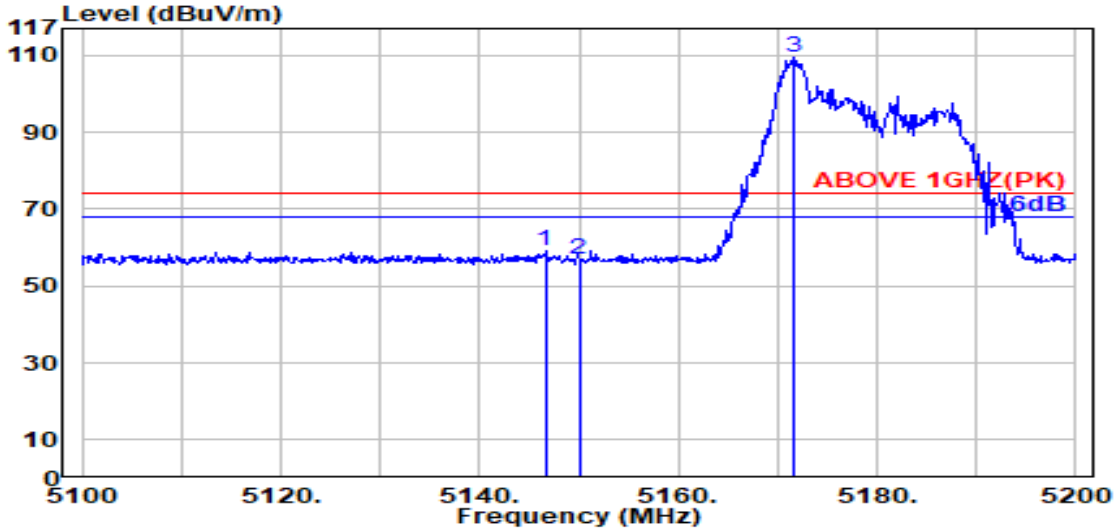

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.49	8.37	39.19	56.53	59.20	74.00	14.80	Peak
5150.000	33.50	8.37	39.19	54.38	57.06	74.00	16.94	Peak
@ 5171.600	33.63	8.40	39.19	106.47	109.30	---	---	Peak

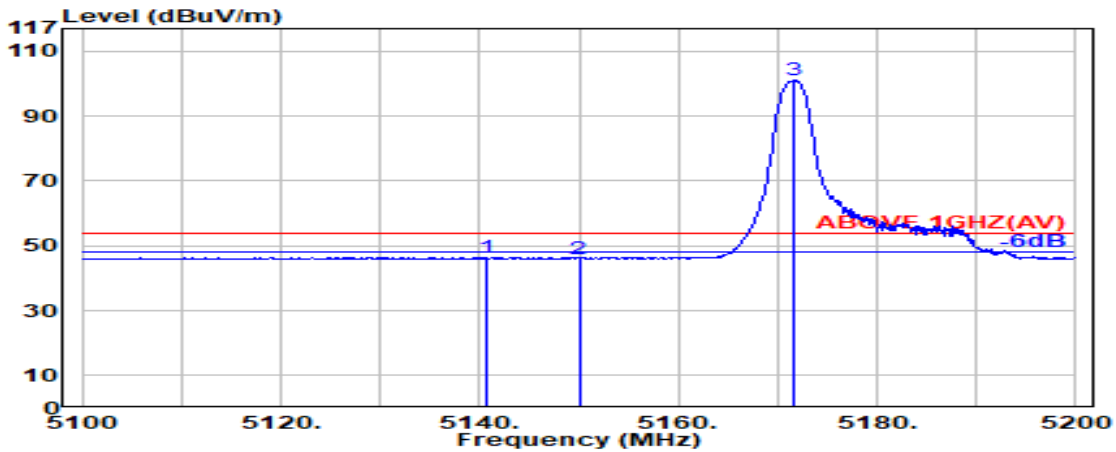


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.700	33.48	8.36	39.19	43.67	46.32	54.00	7.68	Average
5150.000	33.50	8.37	39.19	43.41	46.09	54.00	7.91	Average
@ 5171.700	33.63	8.40	39.19	98.23	101.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

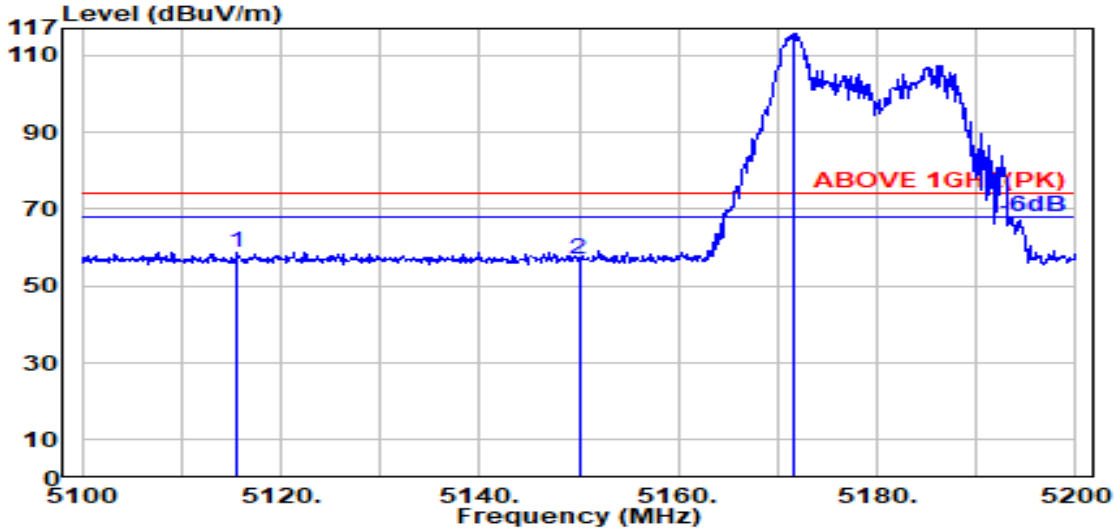

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.600	33.43	8.34	39.20	56.28	58.85	74.00	15.15	Peak
5150.000	33.50	8.37	39.19	54.43	57.11	74.00	16.89	Peak
@ 5171.500	33.63	8.40	39.19	113.03	115.87	---	---	Peak

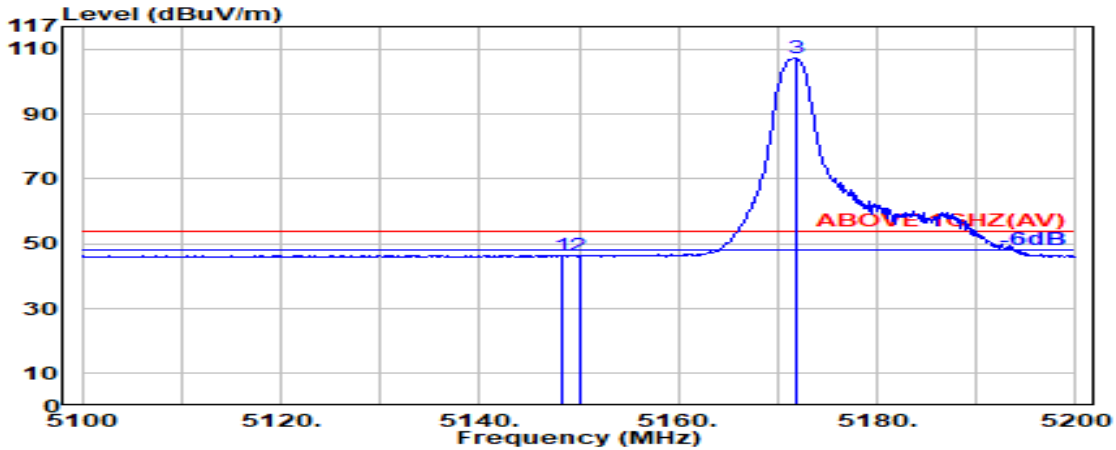


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.50	8.37	39.19	43.77	46.45	54.00	7.55	Average
5150.000	33.50	8.37	39.19	43.59	46.27	54.00	7.73	Average
@ 5171.800	33.63	8.40	39.19	104.56	107.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

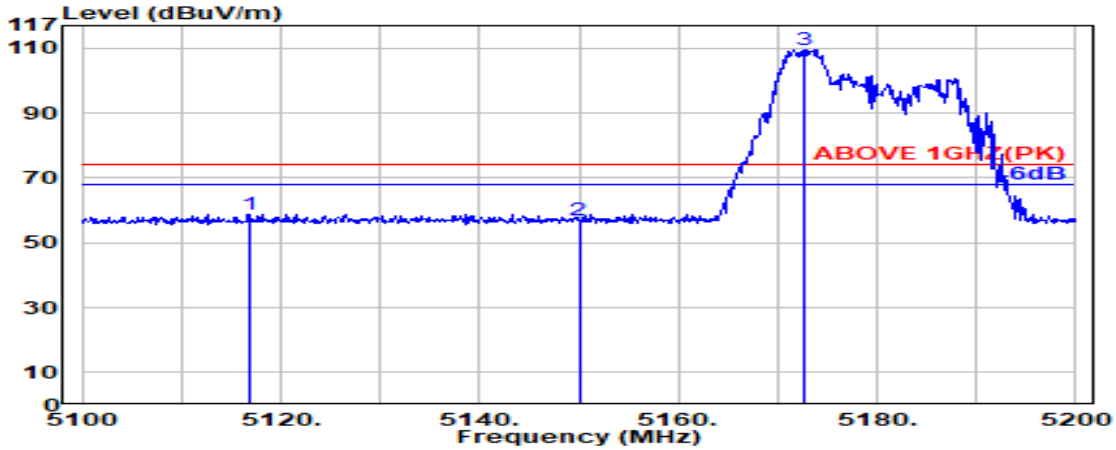

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.900	33.43	8.34	39.20	56.34	58.92	74.00	15.08	Peak
5150.000	33.50	8.37	39.19	54.21	56.89	74.00	17.11	Peak
@ 5172.600	33.64	8.40	39.19	106.86	109.71	---	---	Peak

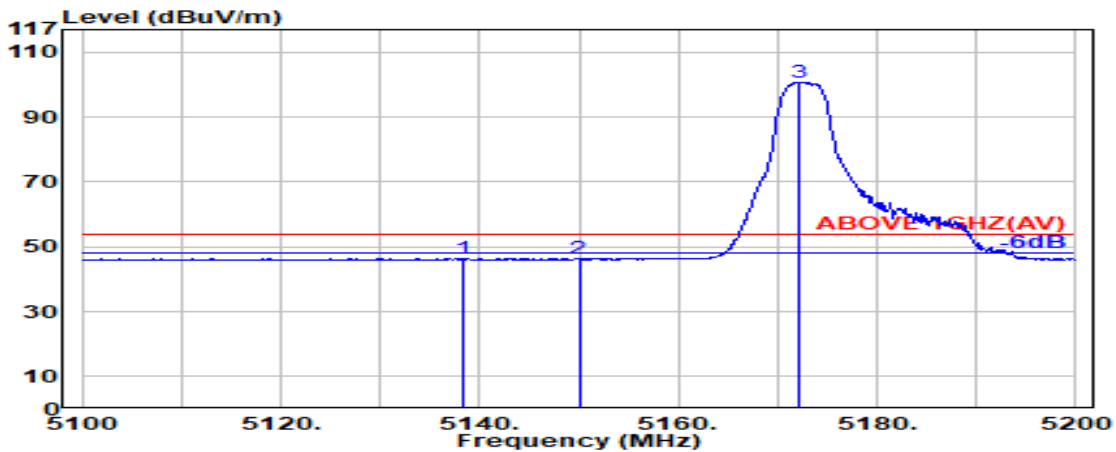


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.300	33.48	8.36	39.19	43.74	46.38	54.00	7.62	Average
5150.000	33.50	8.37	39.19	43.47	46.15	54.00	7.85	Average
@ 5172.100	33.63	8.40	39.19	98.00	100.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

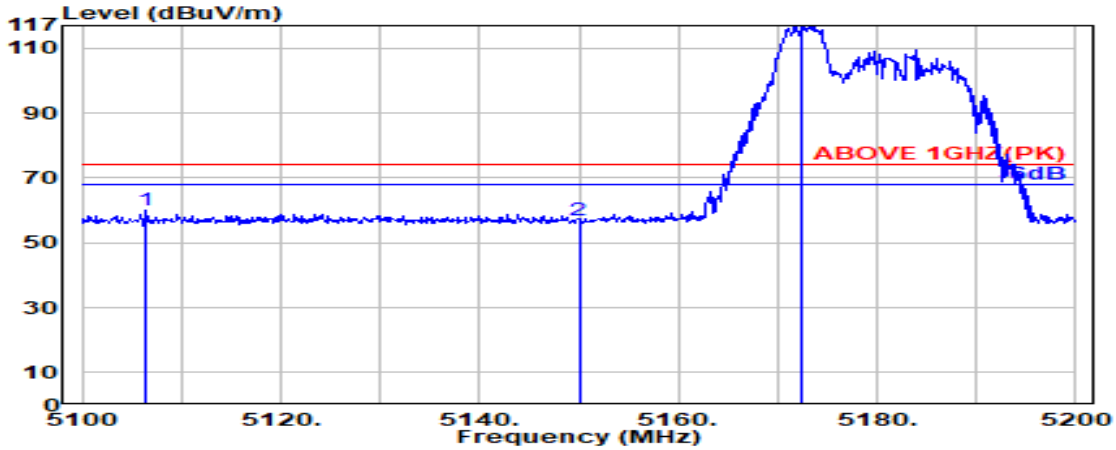

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.400	33.41	8.33	39.20	57.36	59.91	74.00	14.09	Peak
5150.000	33.50	8.37	39.19	54.07	56.75	74.00	17.25	Peak
@ 5172.400	33.63	8.40	39.19	114.10	116.94	---	---	Peak

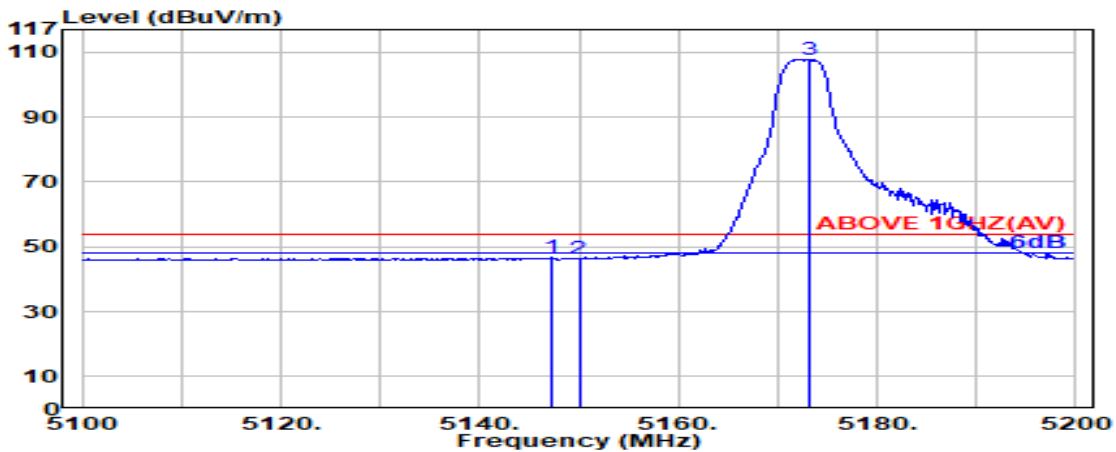


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.49	8.37	39.19	44.02	46.69	54.00	7.31	Average
5150.000	33.50	8.37	39.19	43.78	46.46	54.00	7.54	Average
@ 5173.200	33.64	8.40	39.19	105.07	107.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

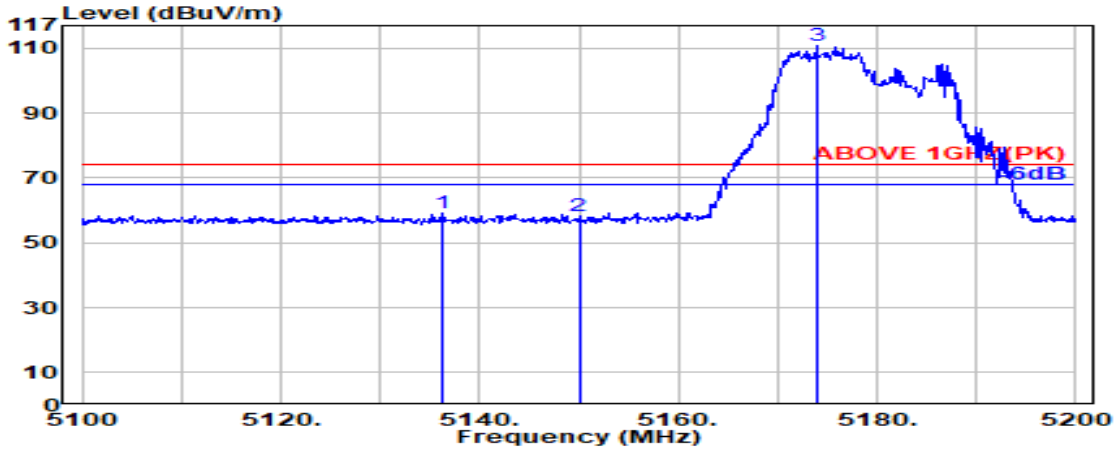

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.200	33.47	8.36	39.19	56.43	59.07	74.00	14.93	Peak
5150.000	33.50	8.37	39.19	55.40	58.08	74.00	15.92	Peak
@ 5173.900	33.64	8.40	39.19	107.83	110.69	---	---	Peak

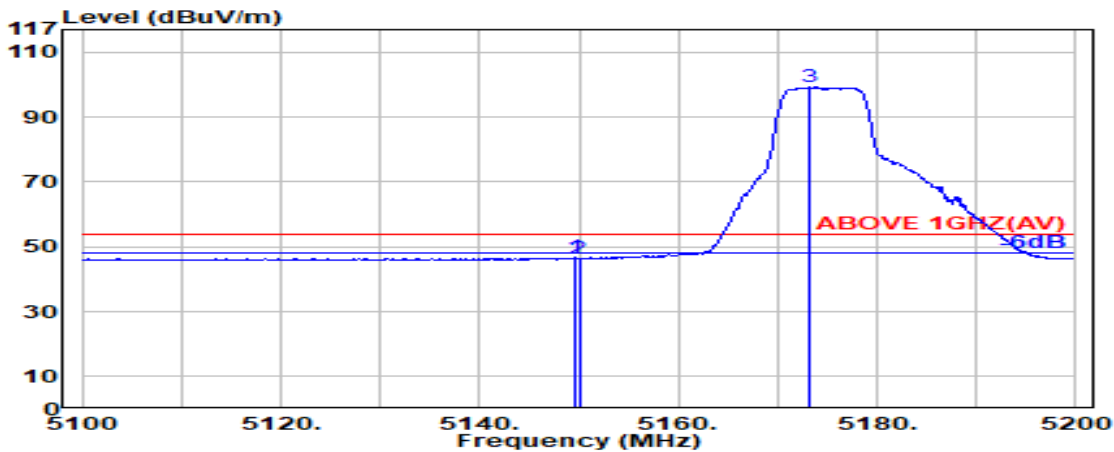


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.19	44.22	46.90	54.00	7.10	Average
5150.000	33.50	8.37	39.19	43.62	46.30	54.00	7.70	Average
@ 5173.200	33.64	8.40	39.19	96.42	99.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

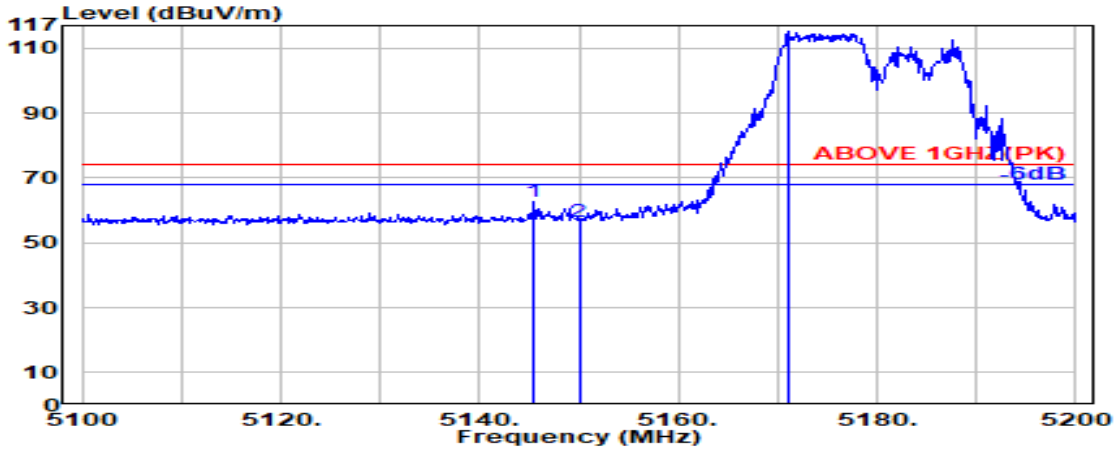

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	33.49	8.37	39.19	60.14	62.81	74.00	11.19	Peak
5150.000	33.50	8.37	39.19	53.86	56.54	74.00	17.46	Peak
@ 5171.200	33.63	8.40	39.19	112.58	115.42	--	---	Peak

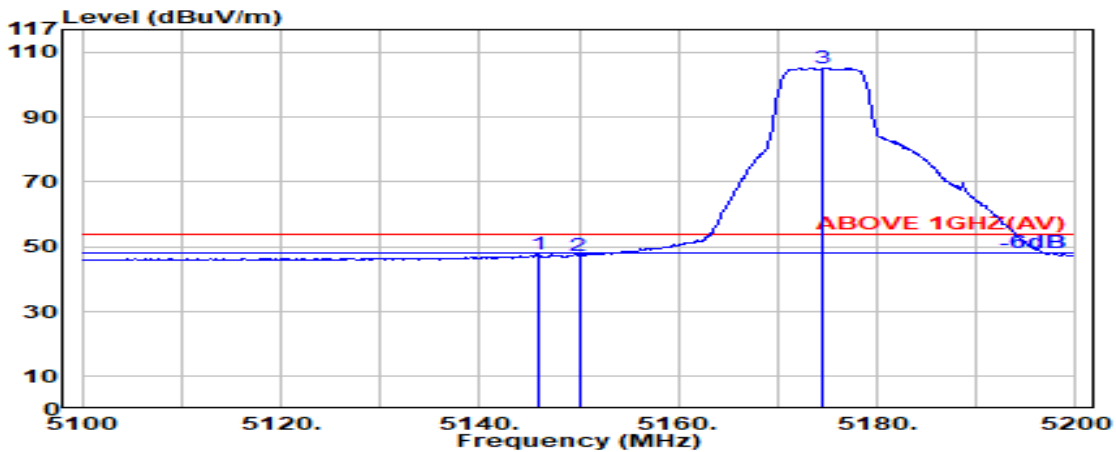


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.900	33.49	8.37	39.19	45.07	47.74	54.00	6.26	Average
5150.000	33.50	8.37	39.19	44.69	47.37	54.00	6.63	Average
@ 5174.600	33.65	8.40	39.19	102.32	105.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

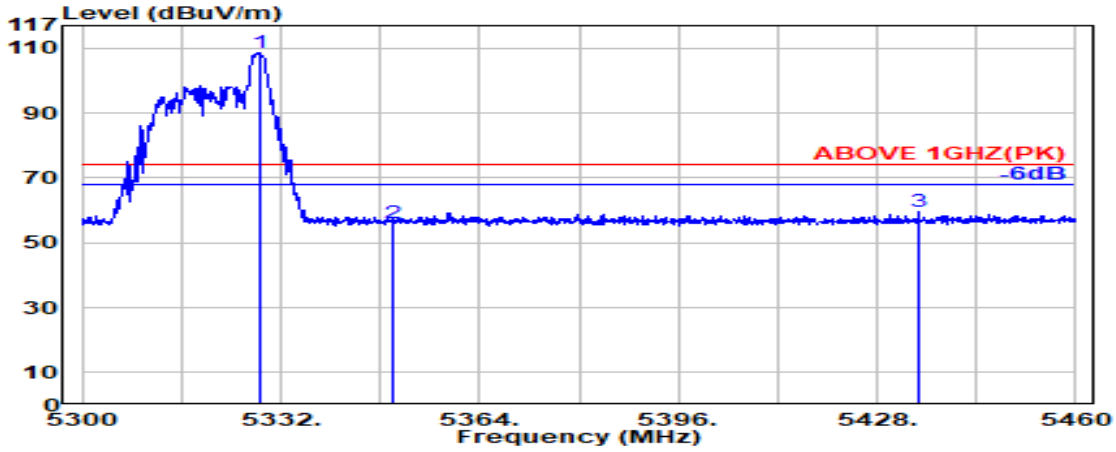

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.74	8.55	39.17	105.55	108.67	---	---	Peak
5350.000	33.70	8.57	39.17	52.98	56.09	74.00	17.91	Peak
5434.800	33.97	8.65	39.16	56.33	59.80	74.00	14.20	Peak

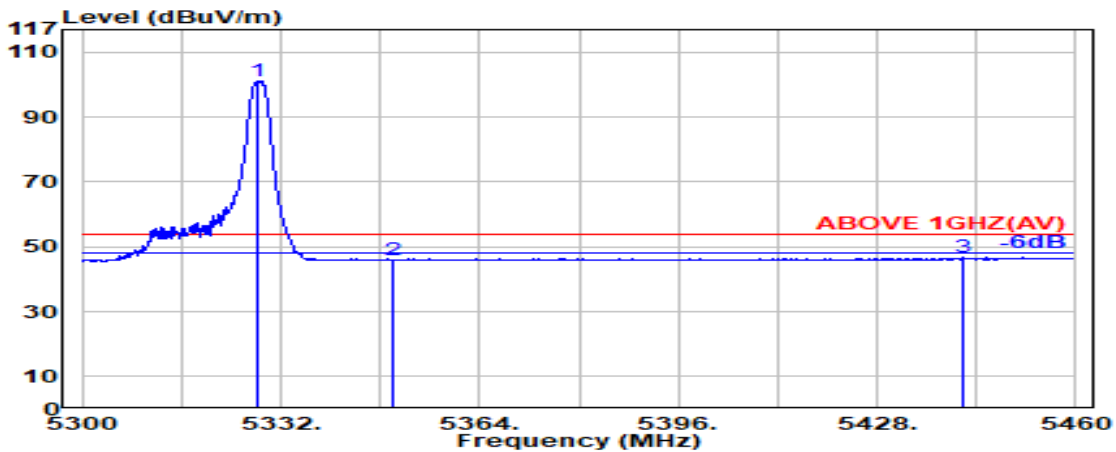


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	97.95	101.08	---	---	Average
5350.000	33.70	8.57	39.17	42.88	45.99	54.00	8.01	Average
5441.700	33.98	8.66	39.16	43.12	46.61	54.00	7.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

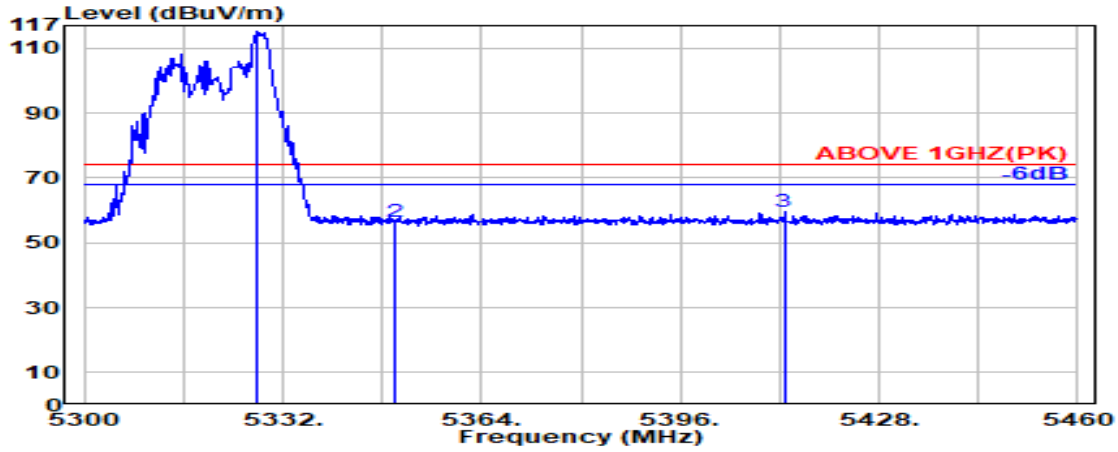

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.74	8.55	39.17	112.01	115.14	---	---	Peak
5350.000	33.70	8.57	39.17	53.20	56.30	74.00	17.70	Peak
5412.700	33.93	8.63	39.16	56.04	59.44	74.00	14.56	Peak

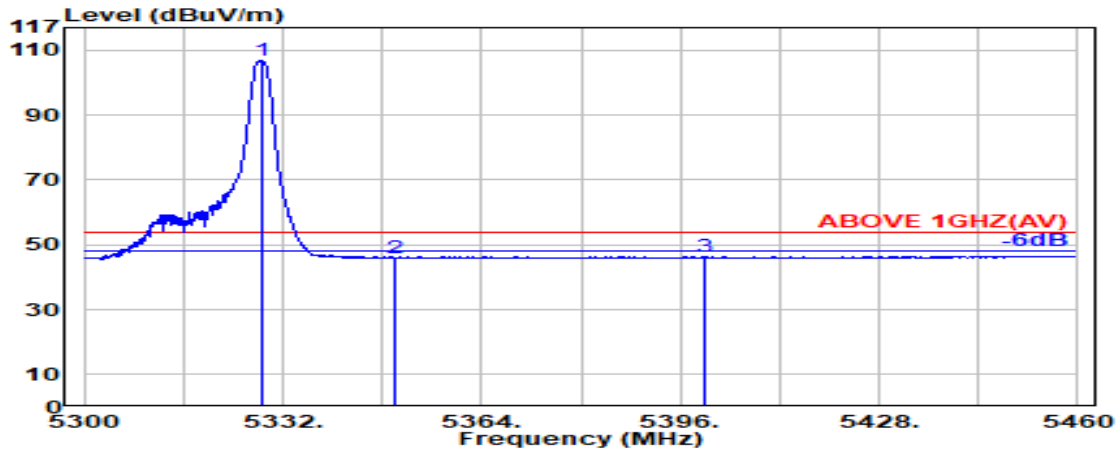


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	33.74	8.55	39.17	103.69	106.82	---	---	Average
5350.000	33.70	8.57	39.17	42.93	46.04	54.00	7.96	Average
5399.800	33.90	8.62	39.16	43.21	46.57	54.00	7.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

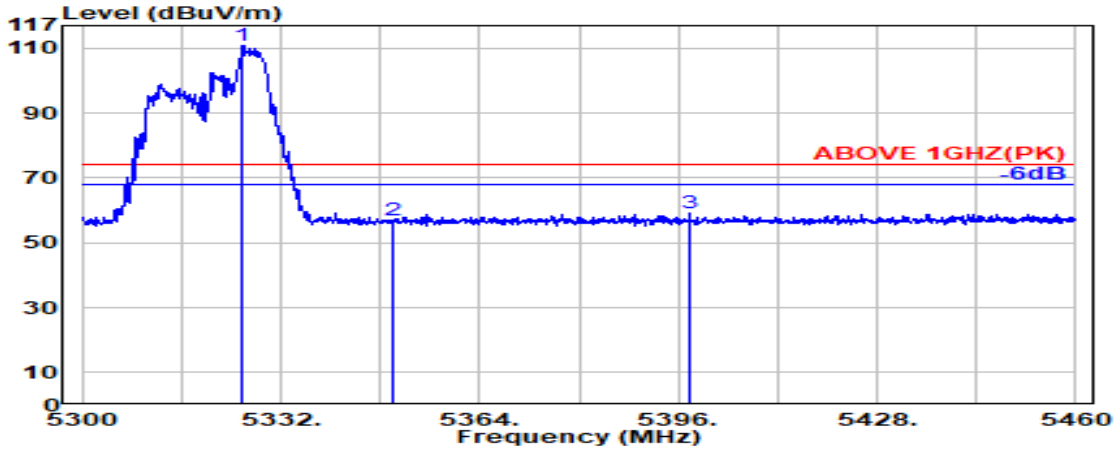

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.900	33.75	8.55	39.17	107.85	110.98	---	---	Peak
5350.000	33.70	8.57	39.17	53.86	56.97	74.00	17.03	Peak
5397.800	33.89	8.62	39.16	55.78	59.13	74.00	14.87	Peak

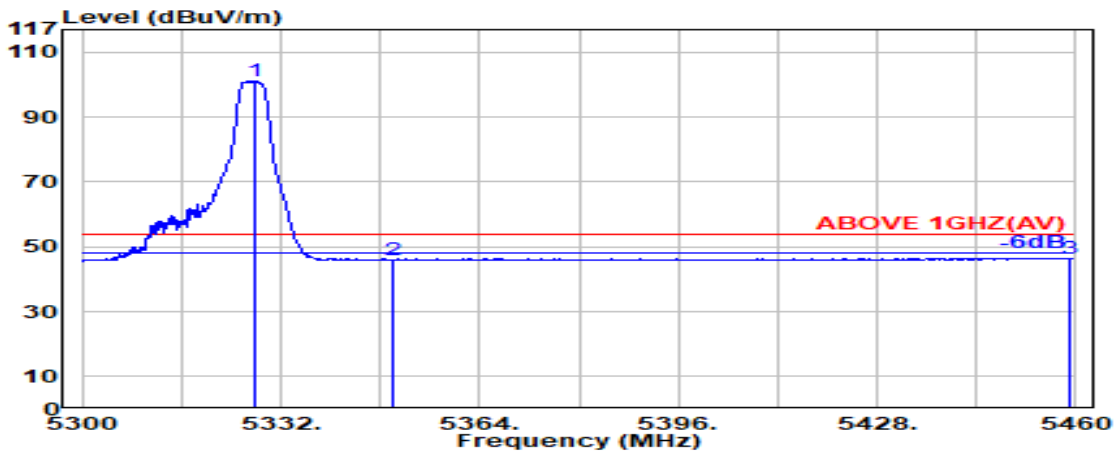


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.74	8.55	39.17	98.06	101.19	---	---	Average
5350.000	33.70	8.57	39.17	42.94	46.04	54.00	7.96	Average
5459.100	34.02	8.68	39.15	43.00	46.54	54.00	7.46	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

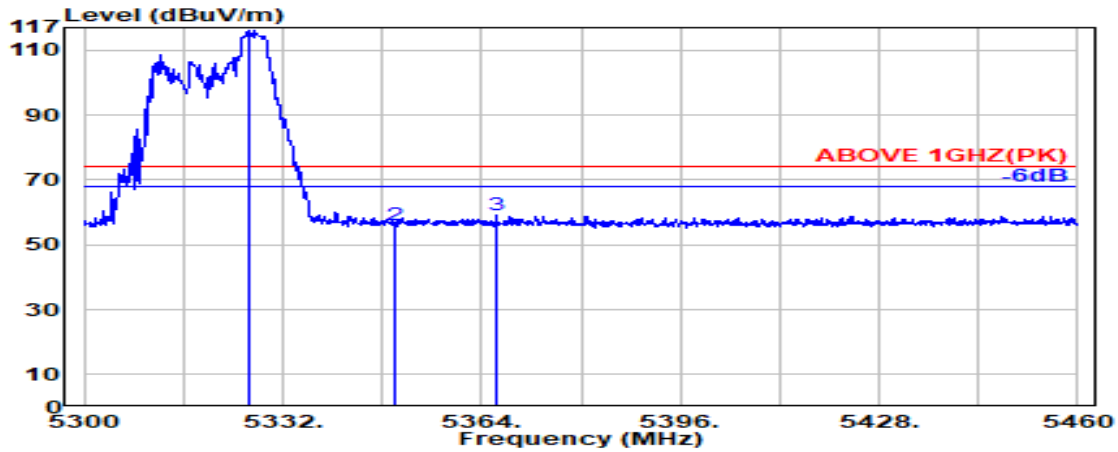

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.700	33.75	8.55	39.17	113.20	116.32	---	---	Peak
5350.000	33.70	8.57	39.17	53.12	56.22	74.00	17.78	Peak
5366.400	33.77	8.59	39.17	55.79	58.98	74.00	15.02	Peak

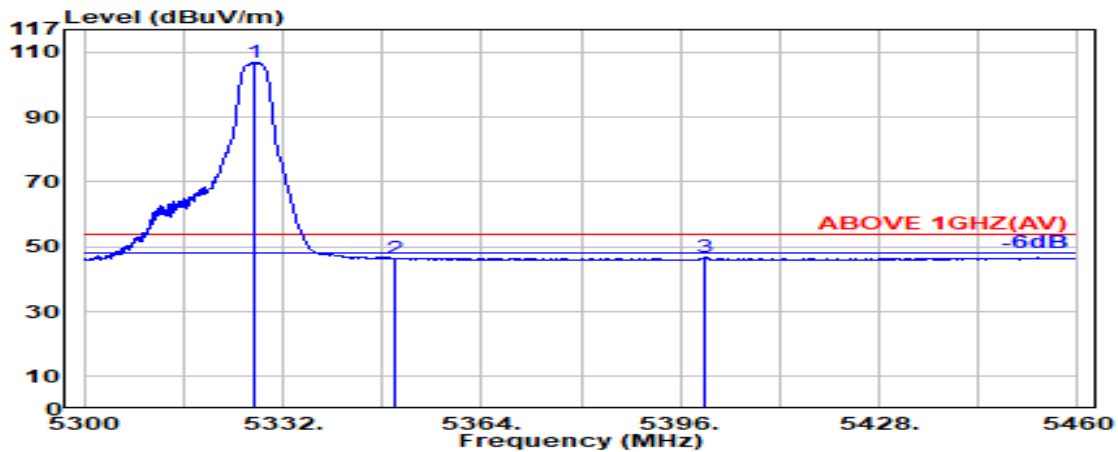


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.74	8.55	39.17	103.66	106.79	---	---	Average
5350.000	33.70	8.57	39.17	43.10	46.21	54.00	7.79	Average
5399.900	33.90	8.62	39.16	43.44	46.80	54.00	7.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

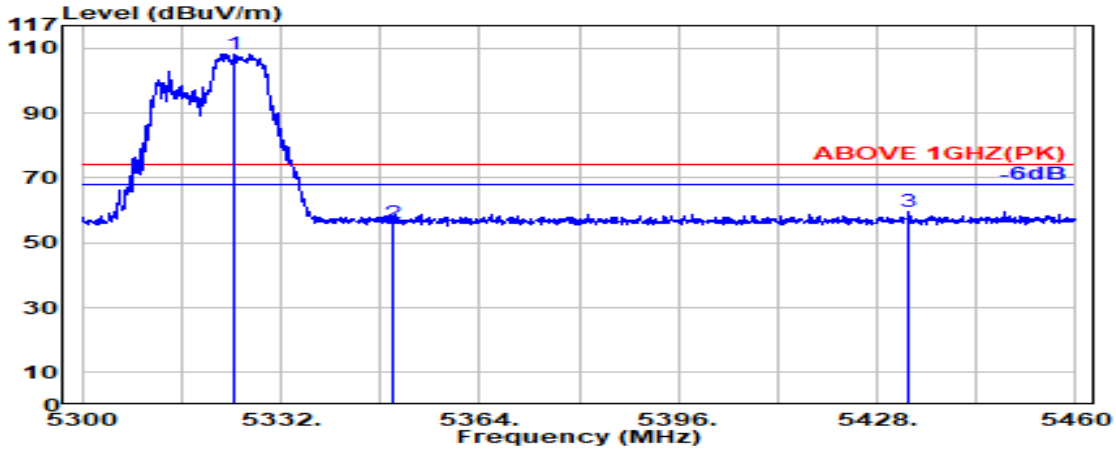

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.600	33.75	8.55	39.17	105.20	108.33	---	---	Peak
5350.000	33.70	8.57	39.17	52.76	55.87	74.00	18.13	Peak
5433.200	33.97	8.65	39.16	56.03	59.49	74.00	14.51	Peak

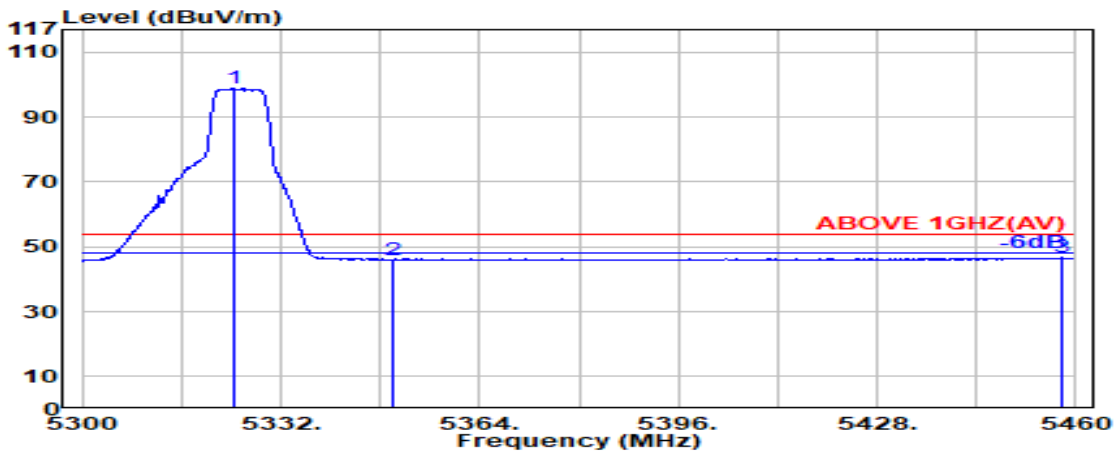


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.300	33.75	8.55	39.17	95.70	98.83	---	---	Average
5350.000	33.70	8.57	39.17	42.93	46.04	54.00	7.96	Average
5457.700	34.02	8.68	39.15	43.16	46.70	54.00	7.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

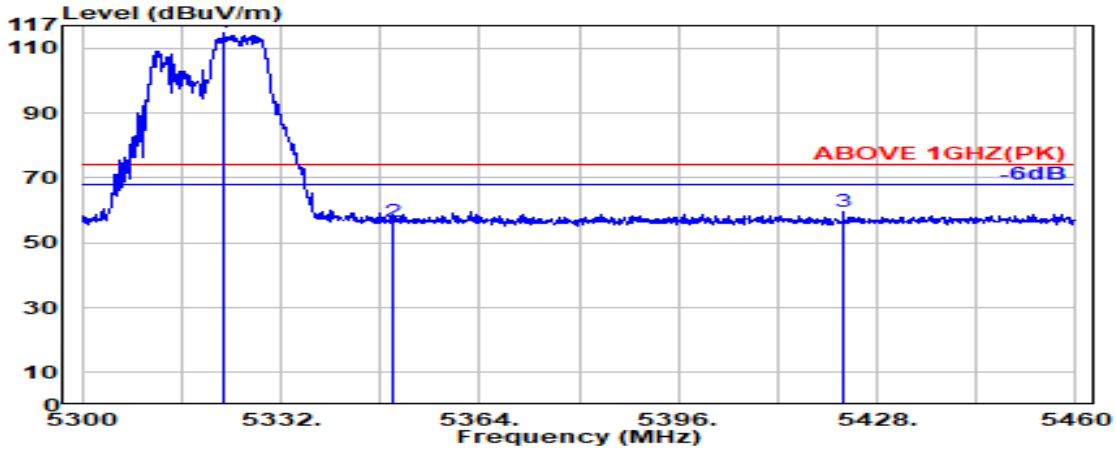

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	33.75	8.55	39.17	111.57	114.70	---	---	Peak
5350.000	33.70	8.57	39.17	53.37	56.48	74.00	17.52	Peak
5422.500	33.95	8.64	39.16	56.04	59.47	74.00	14.53	Peak

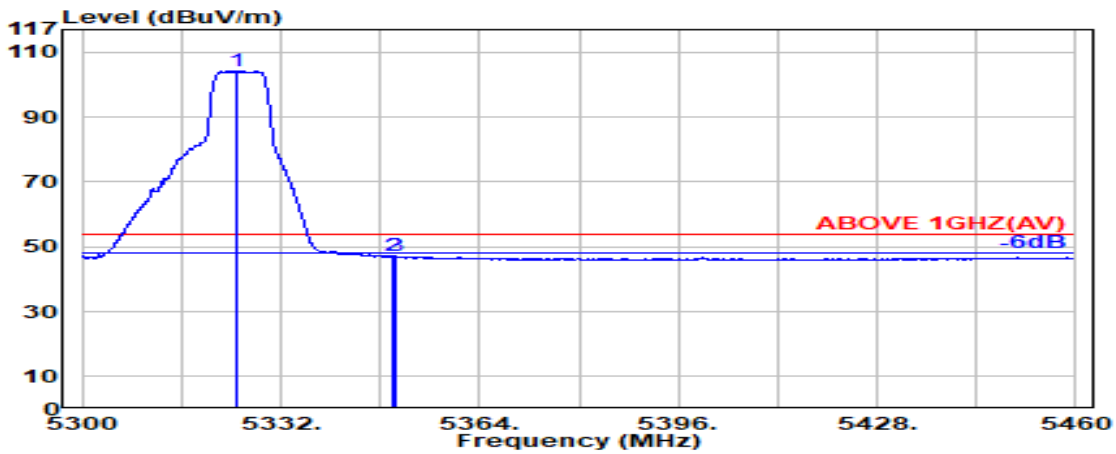


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.700	33.75	8.55	39.17	101.16	104.29	---	---	Average
5350.000	33.70	8.57	39.17	43.94	47.05	54.00	6.95	Average
5350.500	33.70	8.57	39.17	44.00	47.11	54.00	6.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

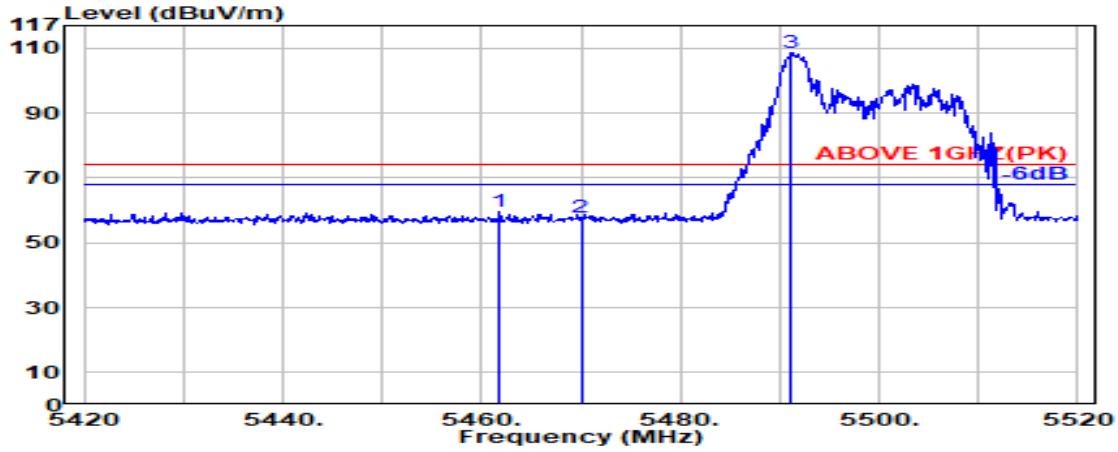

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.800	34.02	8.68	39.15	55.87	59.42	74.00	14.58	Peak
5470.000	34.04	8.69	39.15	54.29	57.86	74.00	16.14	Peak
@ 5491.200	34.08	8.71	39.15	104.99	108.63	---	---	Peak

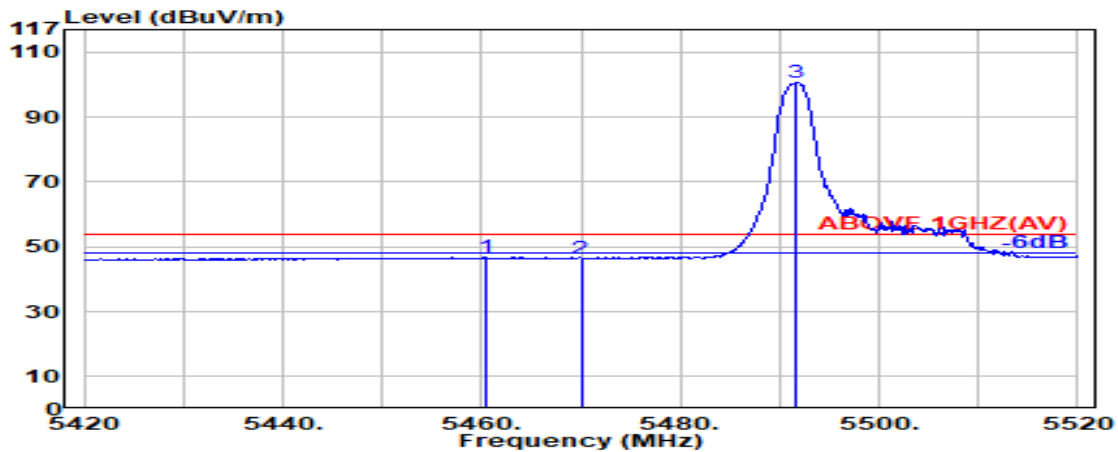


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.400	34.02	8.68	39.15	43.19	46.74	54.00	7.26	Average
5470.000	34.04	8.69	39.15	42.95	46.52	54.00	7.48	Average
@ 5491.700	34.08	8.71	39.15	97.08	100.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

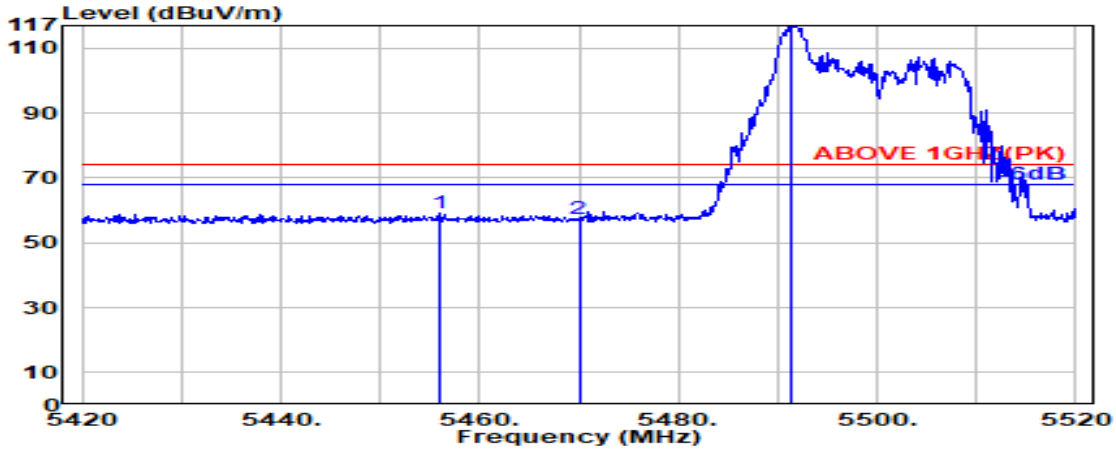

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.100	34.01	8.67	39.16	55.53	59.07	74.00	14.93	Peak
5470.000	34.04	8.69	39.15	53.92	57.49	74.00	16.51	Peak
@ 5491.400	34.08	8.71	39.15	113.65	117.29	---	---	Peak

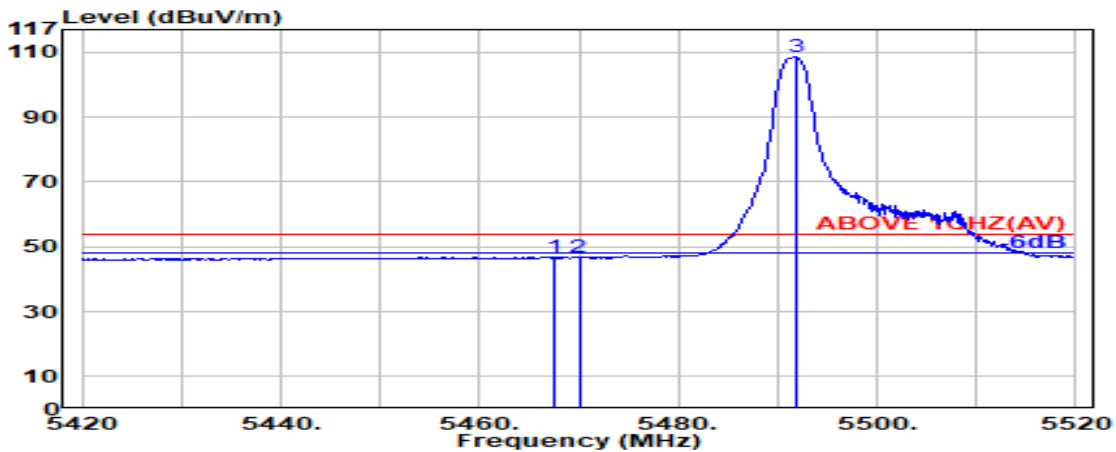


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.15	43.34	46.91	54.00	7.09	Average
5470.000	34.04	8.69	39.15	43.11	46.69	54.00	7.31	Average
@ 5491.800	34.08	8.71	39.15	105.07	108.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

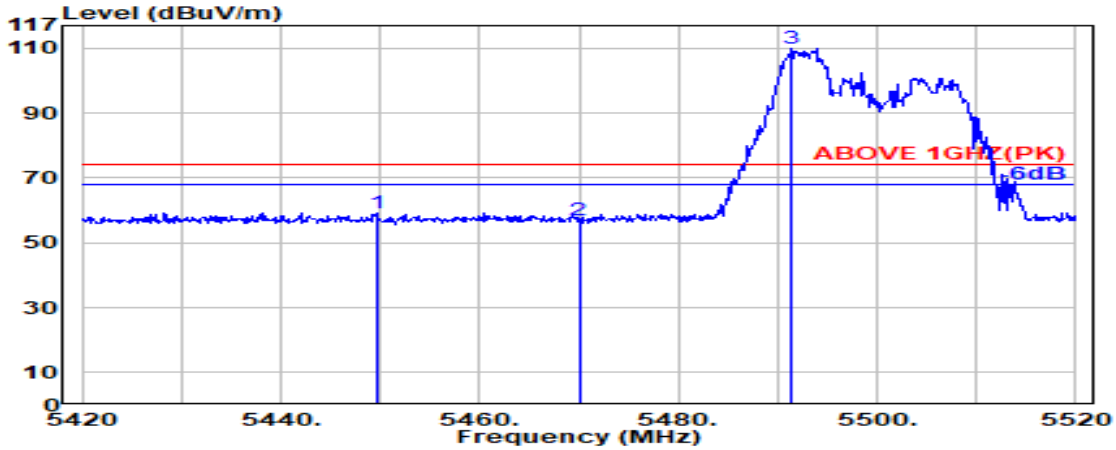

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.600	34.00	8.67	39.16	55.74	59.25	74.00	14.75	Peak
5470.000	34.04	8.69	39.15	53.47	57.05	74.00	16.95	Peak
@ 5491.400	34.08	8.71	39.15	106.33	109.97	---	---	Peak

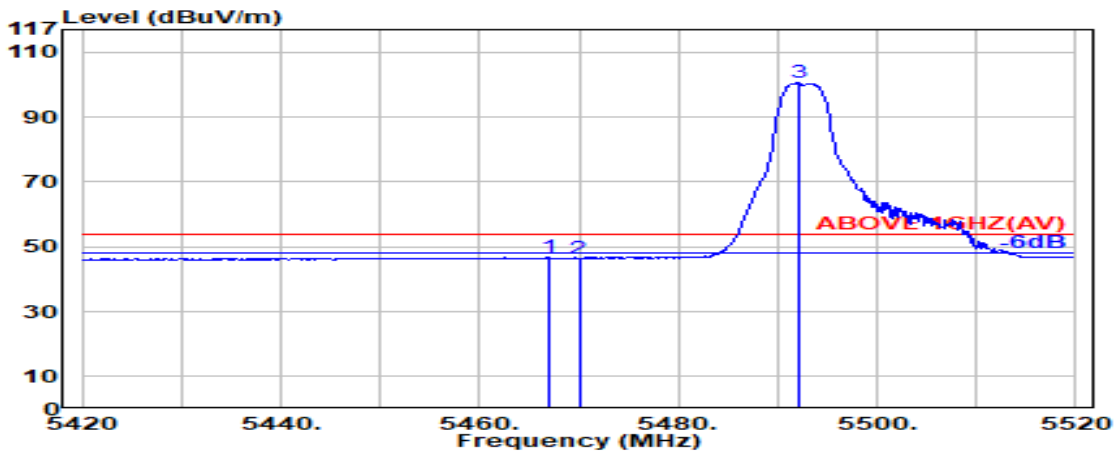


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.03	8.69	39.15	43.16	46.73	54.00	7.27	Average
5470.000	34.04	8.69	39.15	42.86	46.44	54.00	7.56	Average
@ 5492.100	34.08	8.71	39.15	96.89	100.54	--	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

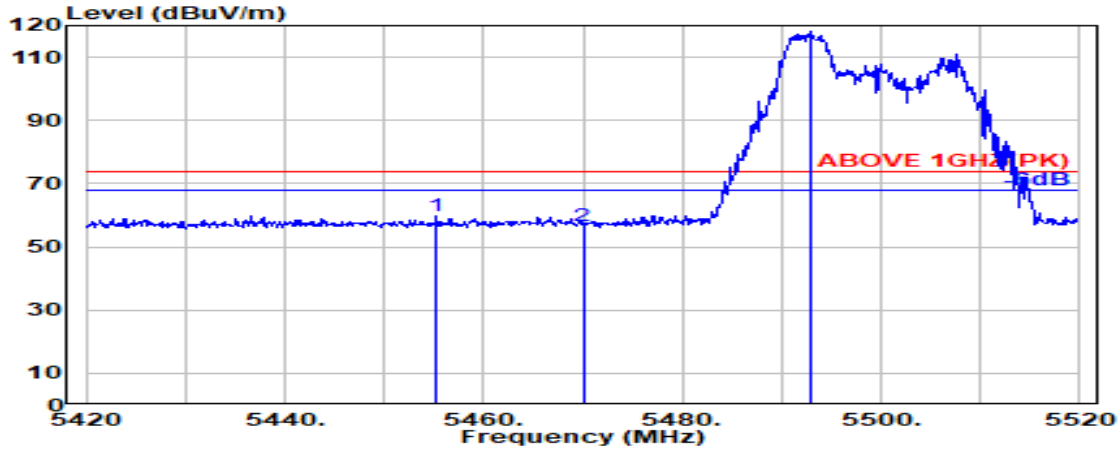

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.200	34.01	8.67	39.16	56.14	59.67	74.00	14.33	Peak
5470.000	34.04	8.69	39.15	52.99	56.57	74.00	17.43	Peak
@ 5492.800	34.09	8.71	39.15	114.33	117.97	---	---	Peak

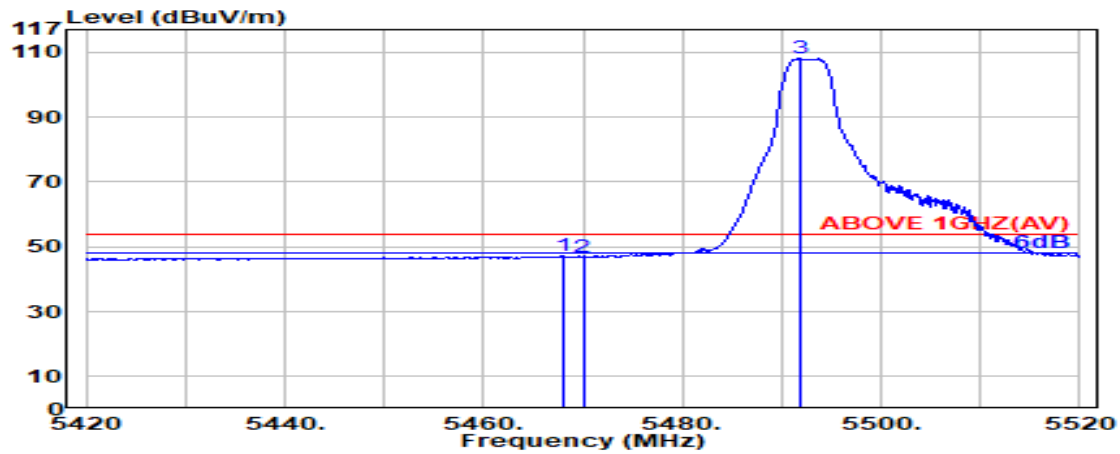


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	43.49	47.05	54.00	6.95	Average
5470.000	34.04	8.69	39.15	43.31	46.88	54.00	7.12	Average
@ 5491.900	34.08	8.71	39.15	104.46	108.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

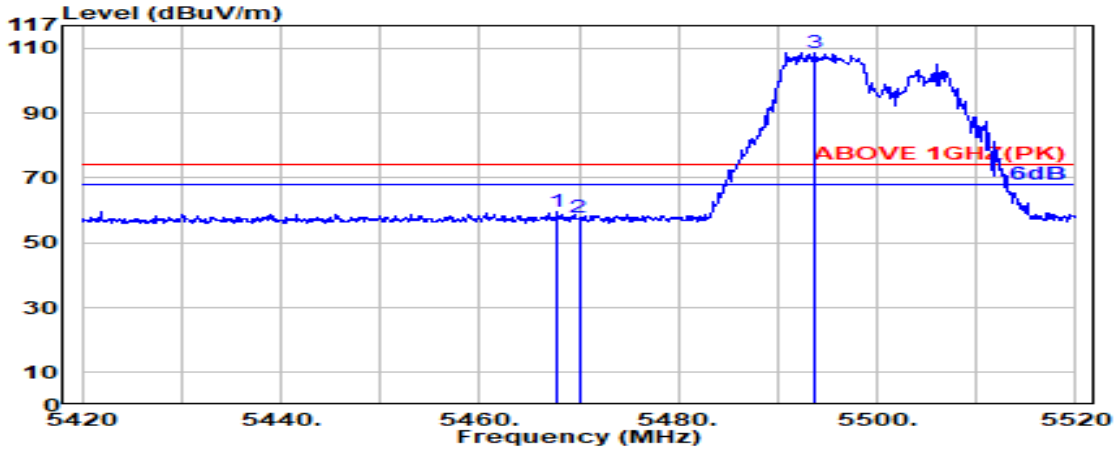

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.69	39.15	55.86	59.43	74.00	14.57	Peak
5470.000	34.04	8.69	39.15	54.38	57.95	74.00	16.05	Peak
@ 5493.800	34.09	8.71	39.15	104.94	108.59	---	---	Peak

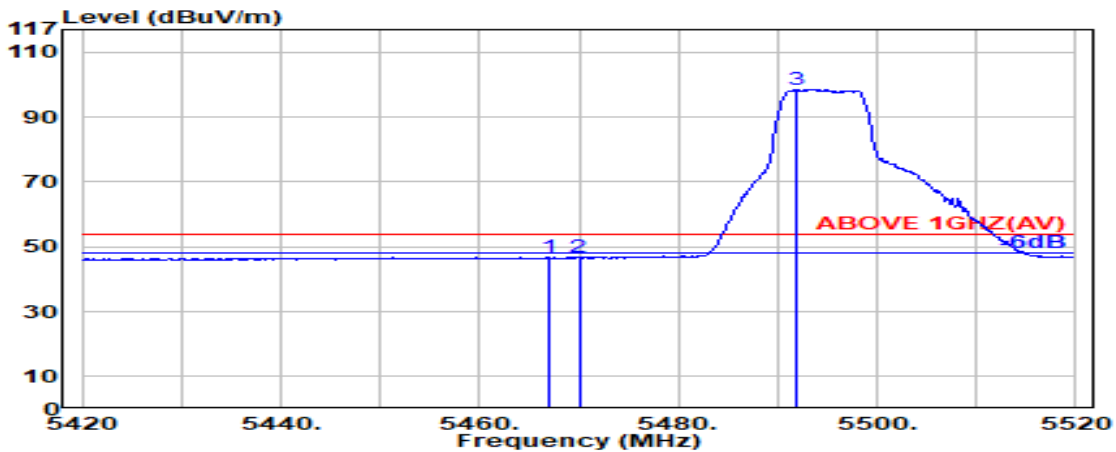


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.03	8.69	39.15	43.15	46.71	54.00	7.29	Average
5470.000	34.04	8.69	39.15	43.06	46.64	54.00	7.36	Average
@ 5492.000	34.08	8.71	39.15	94.84	98.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

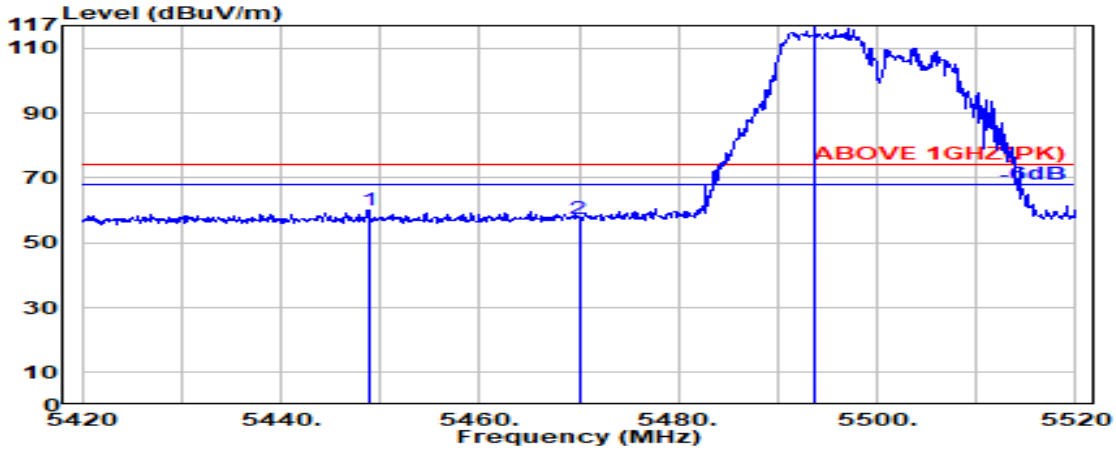

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.800	34.00	8.67	39.16	56.54	60.05	74.00	13.95	Peak
5470.000	34.04	8.69	39.15	53.67	57.24	74.00	16.76	Peak
@ 5493.700	34.09	8.71	39.15	113.12	116.76	---	---	Peak

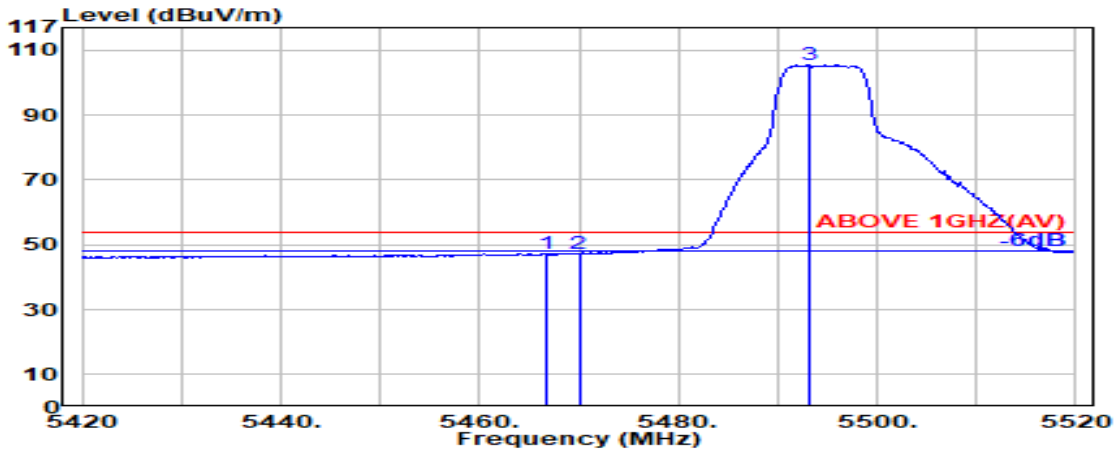


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.03	8.68	39.15	43.78	47.35	54.00	6.65	Peak
5470.000	34.04	8.69	39.15	43.85	47.43	54.00	6.57	Peak
@ 5493.100	34.09	8.71	39.15	101.80	105.45	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

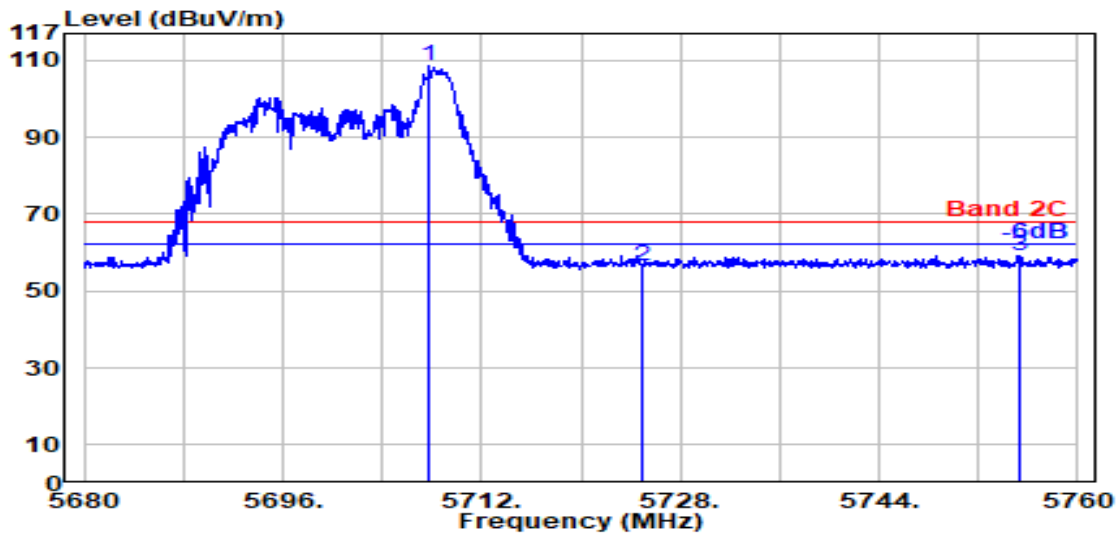

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.800	33.60	8.91	39.19	105.08	108.39	---	---	Peak
5725.000	33.60	8.93	39.20	53.36	56.69	68.20	11.51	Peak
5755.250	33.62	8.95	39.20	55.95	59.32	68.20	8.88	Peak

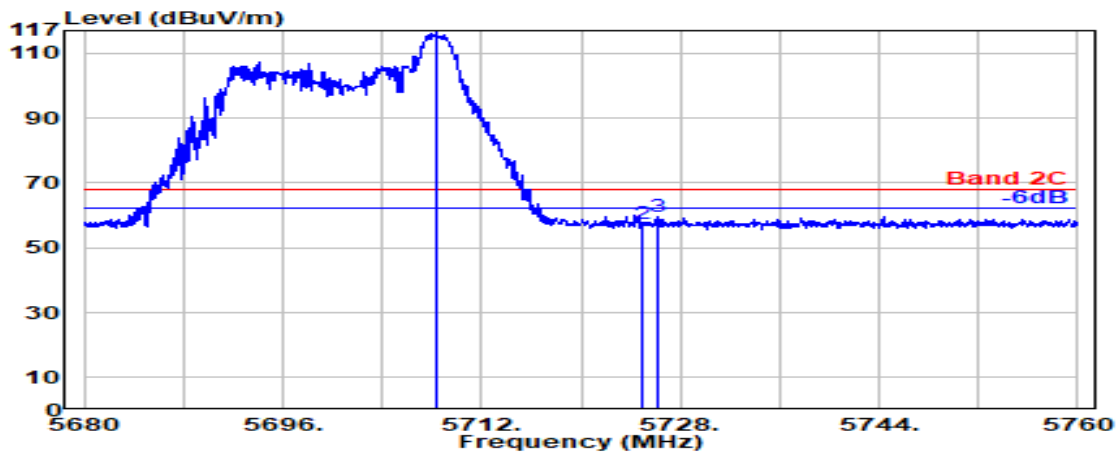


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.350	33.60	8.91	39.19	113.07	116.39	---	---	Peak
5725.000	33.60	8.93	39.20	54.23	57.56	68.20	10.64	Peak
5726.200	33.60	8.93	39.20	56.17	59.50	68.20	8.70	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

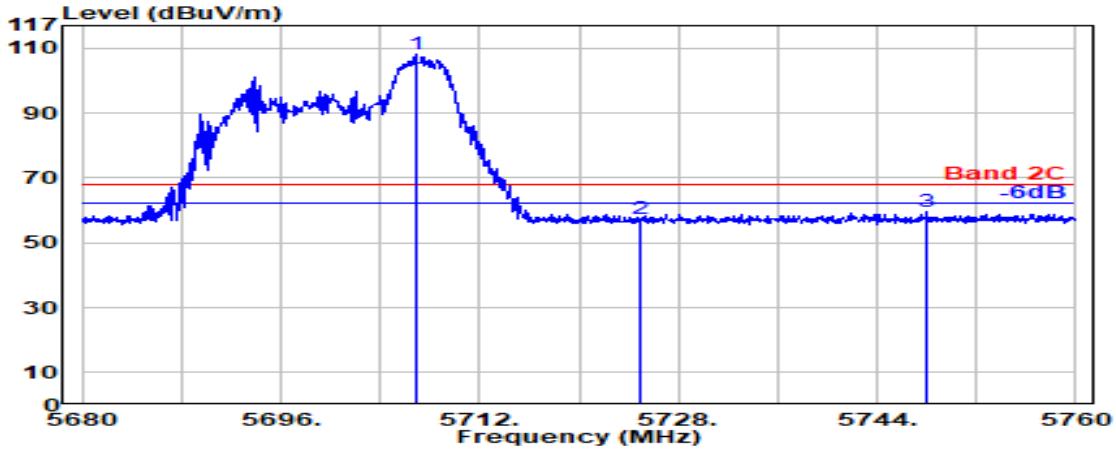

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.850	33.60	8.91	39.19	104.74	108.06	---	---	Peak
5725.000	33.60	8.93	39.20	54.02	57.35	68.20	10.85	Peak
5748.050	33.60	8.95	39.20	56.41	59.75	68.20	8.45	Peak

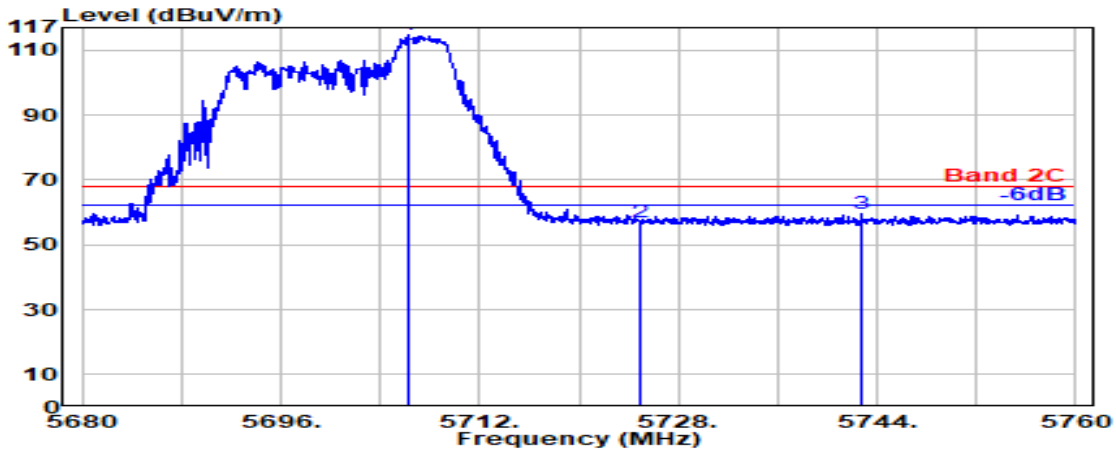


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.250	33.60	8.91	39.19	111.32	114.63	---	---	Peak
5725.000	33.60	8.93	39.20	53.82	57.15	68.20	11.05	Peak
5742.700	33.60	8.94	39.20	56.24	59.58	68.20	8.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

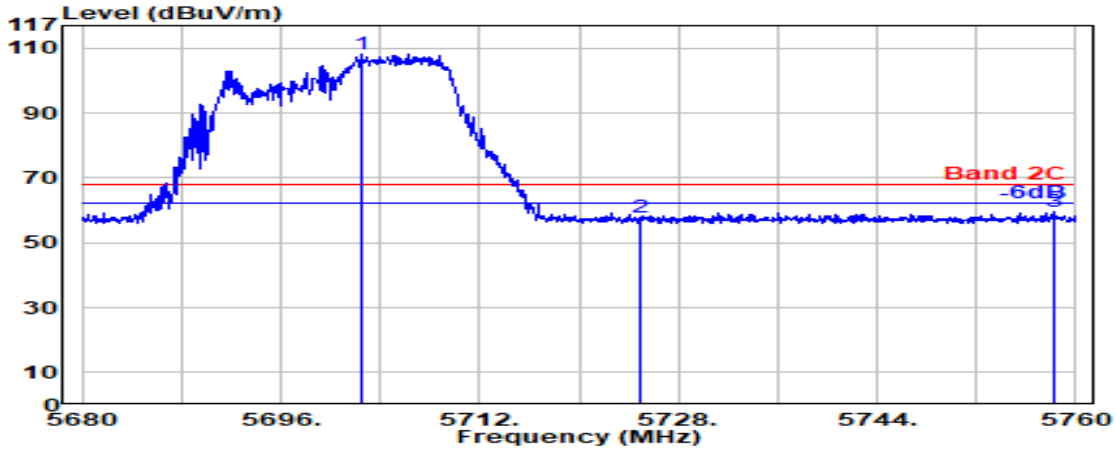

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.450	33.60	8.90	39.19	104.87	108.18	---	---	Peak
5725.000	33.60	8.93	39.20	54.44	57.77	68.20	10.43	Peak
5758.250	33.63	8.96	39.20	56.06	59.45	68.20	8.75	Peak

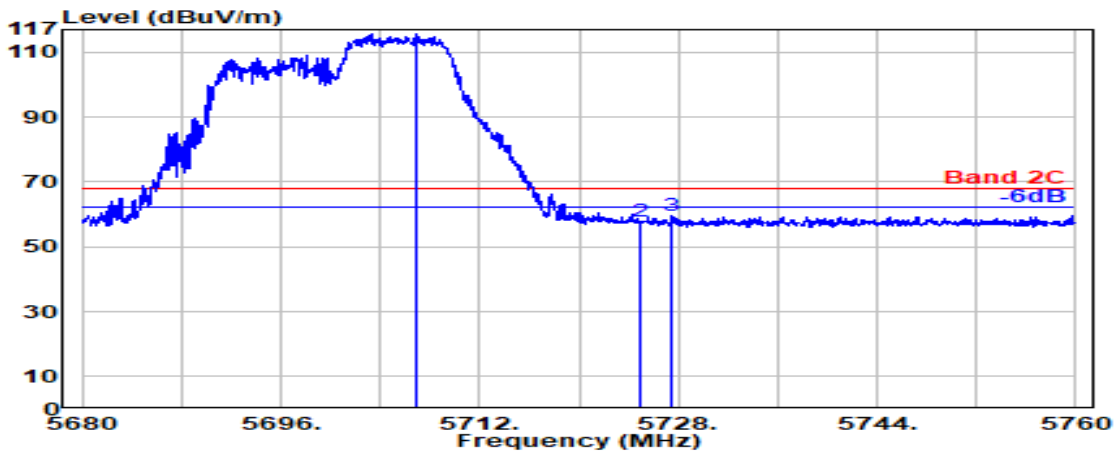


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.000	33.60	8.91	39.19	112.42	115.74	---	---	Peak
5725.000	33.60	8.93	39.20	54.39	57.72	68.20	10.48	Peak
5727.400	33.60	8.93	39.20	56.32	59.66	68.20	8.54	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

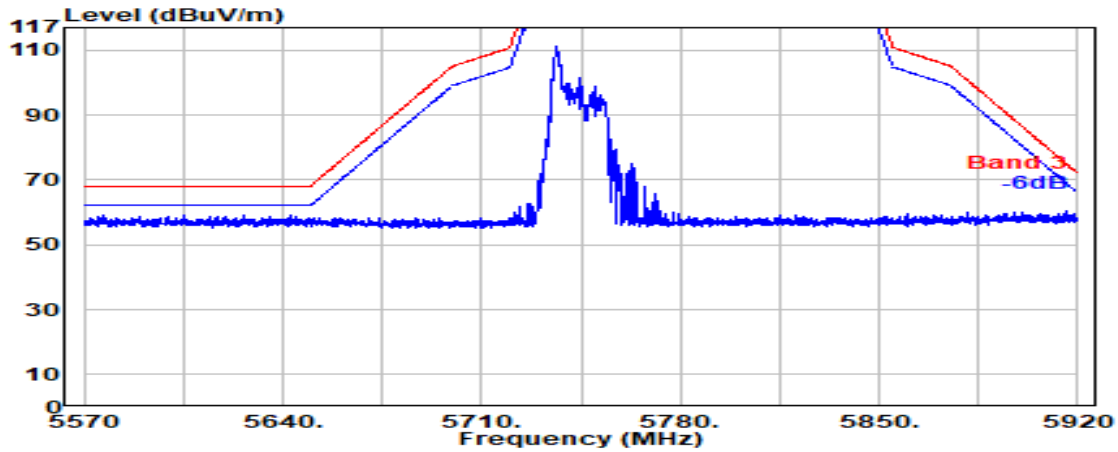


Antenna at Vertical Polarization

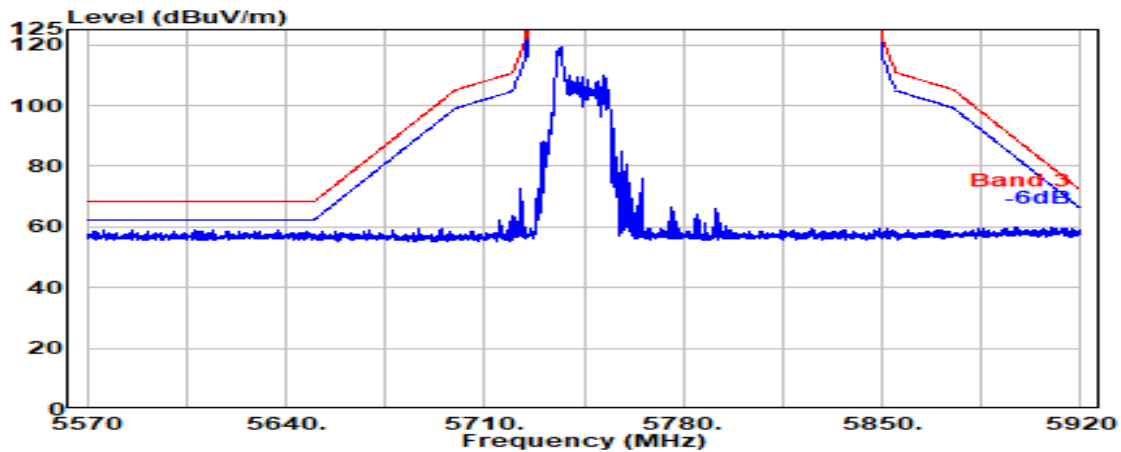


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

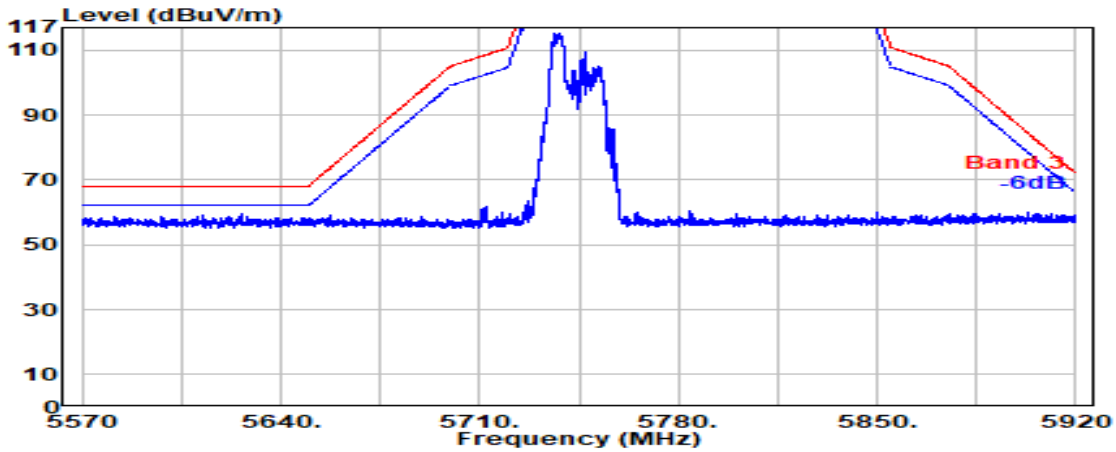


Antenna at Vertical Polarization

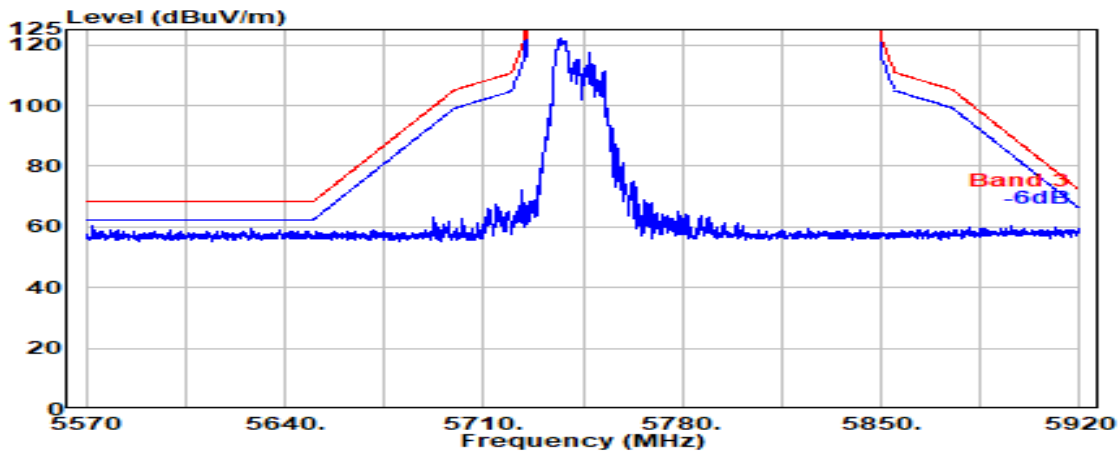


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

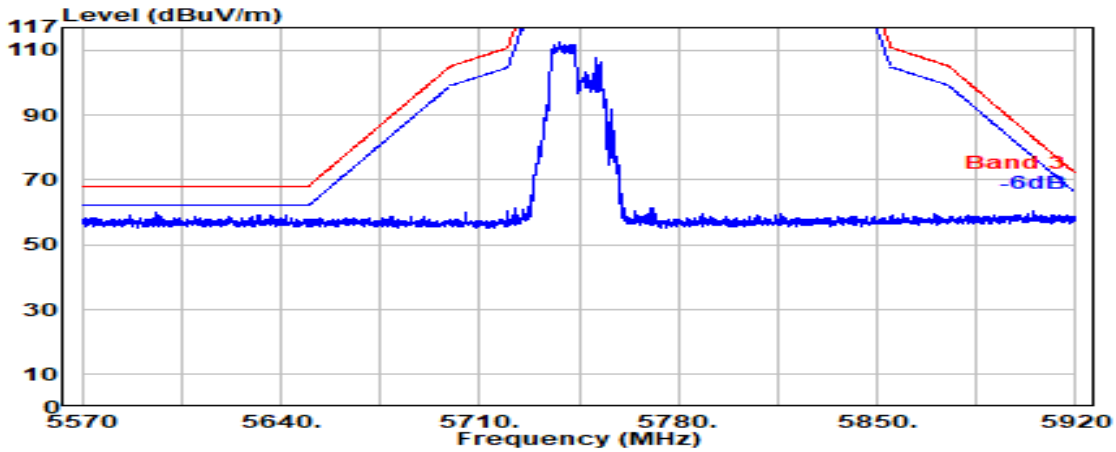


Antenna at Vertical Polarization

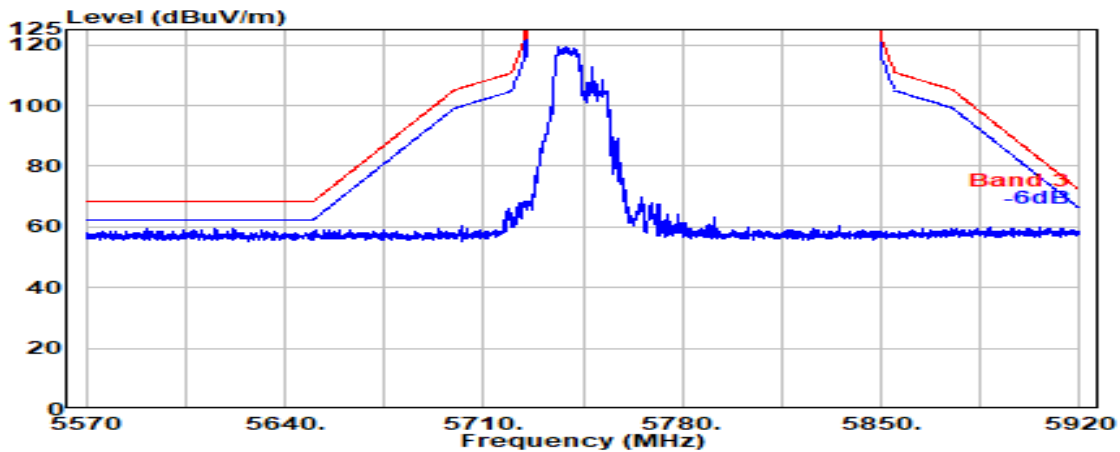




Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

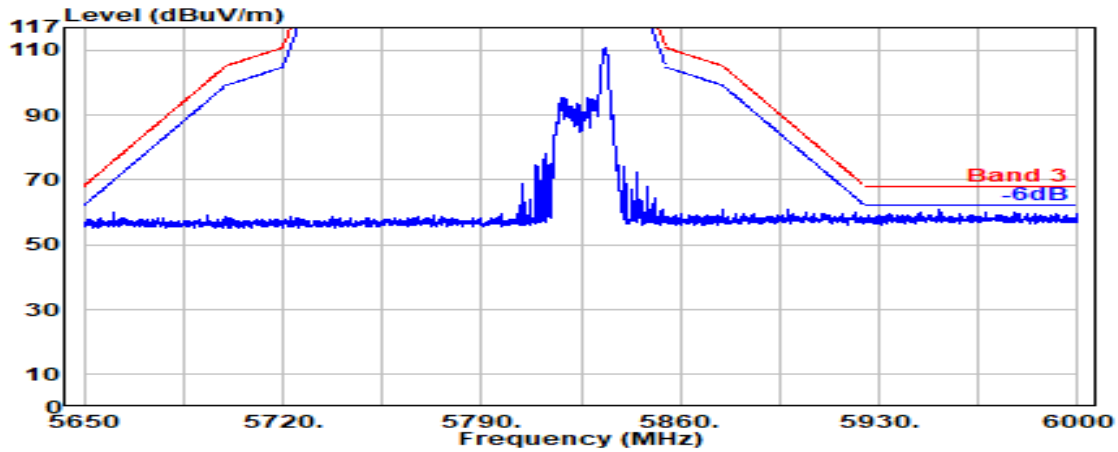


Antenna at Vertical Polarization

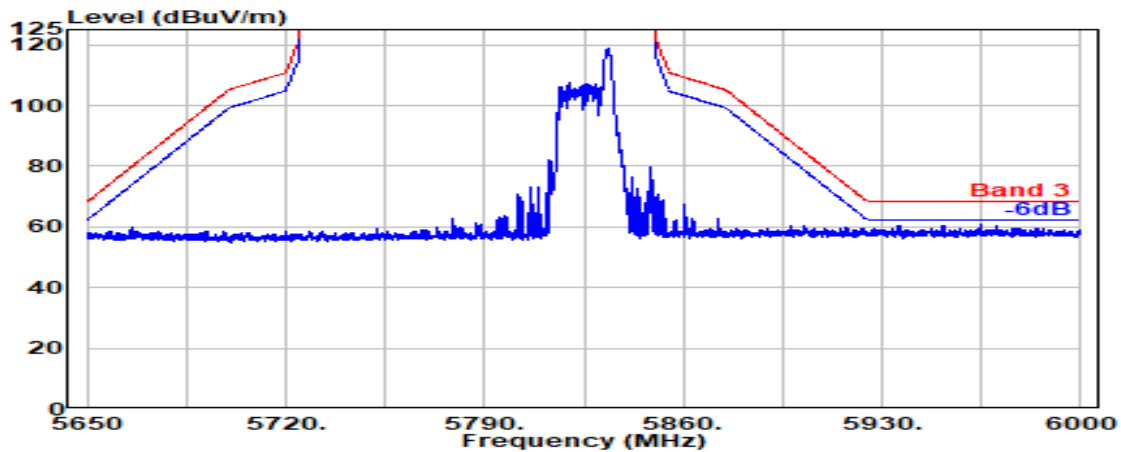


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

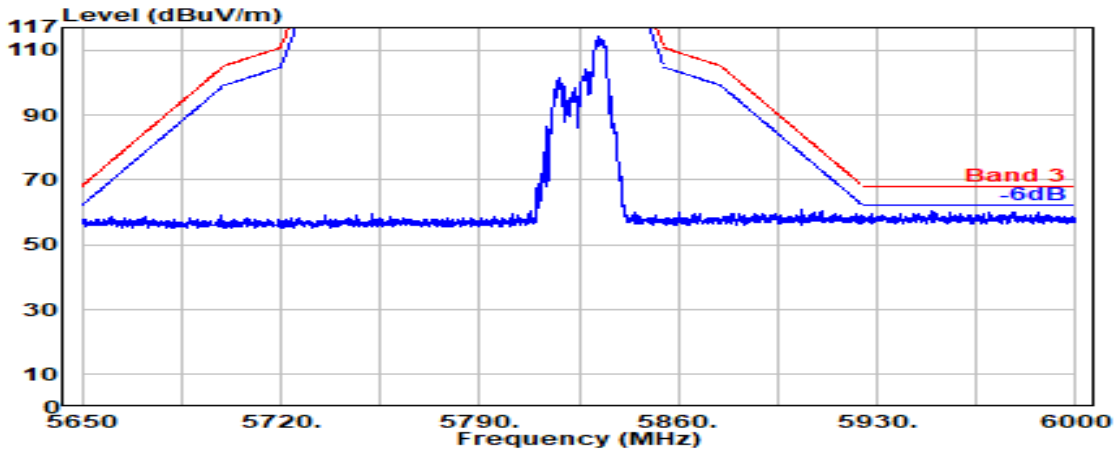


Antenna at Vertical Polarization

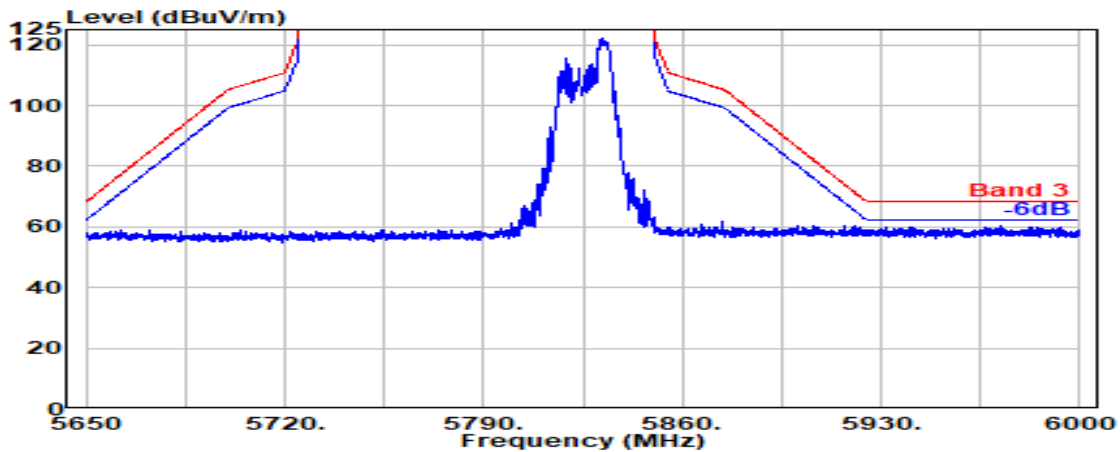


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

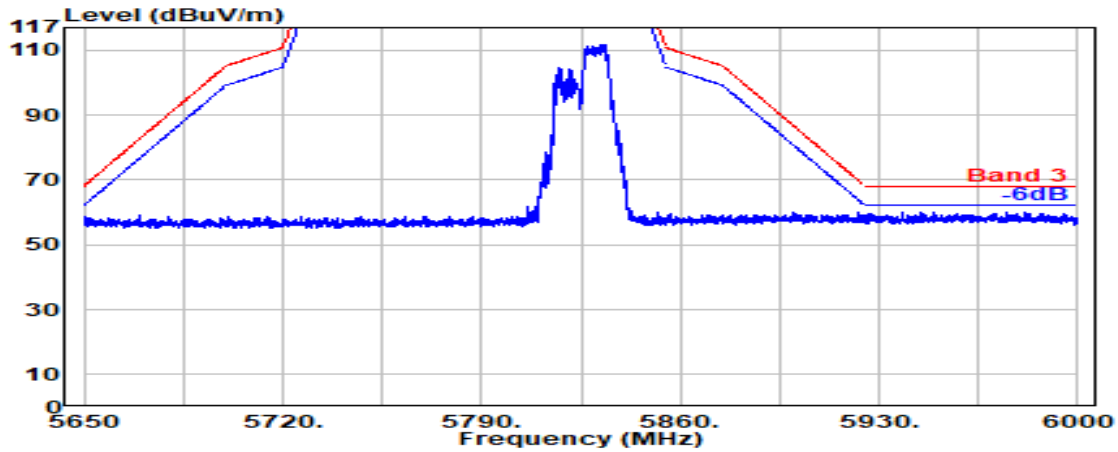


Antenna at Vertical Polarization

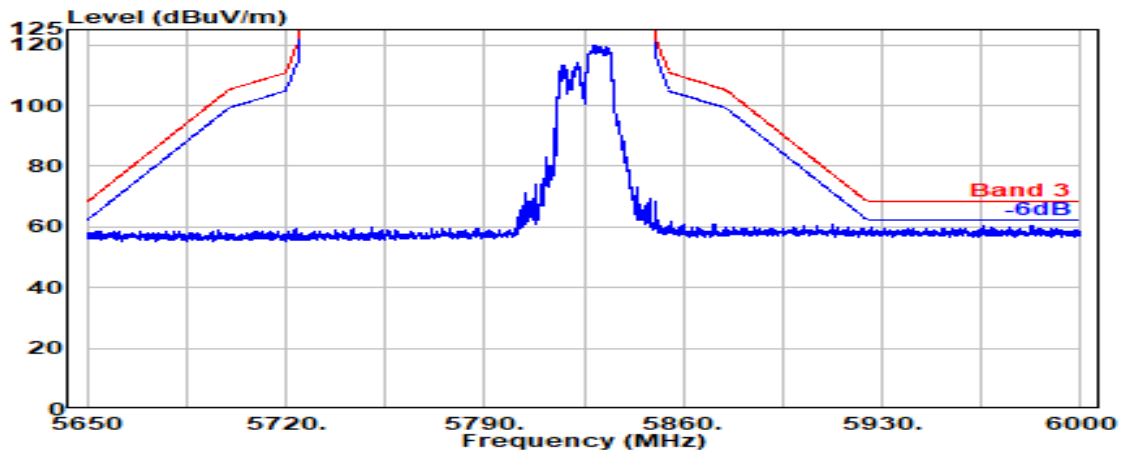

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

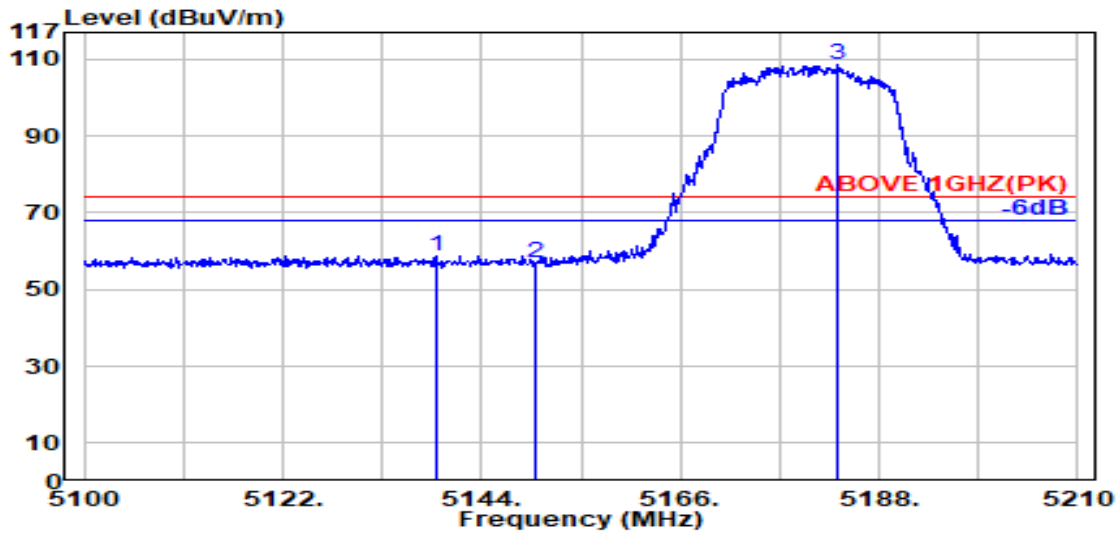

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.900	33.48	8.36	39.19	56.26	58.91	74.00	15.09	Peak
5150.000	33.50	8.37	39.19	54.20	56.89	74.00	17.11	Peak
@ 5183.300	33.70	8.41	39.19	105.59	108.51	---	---	Peak

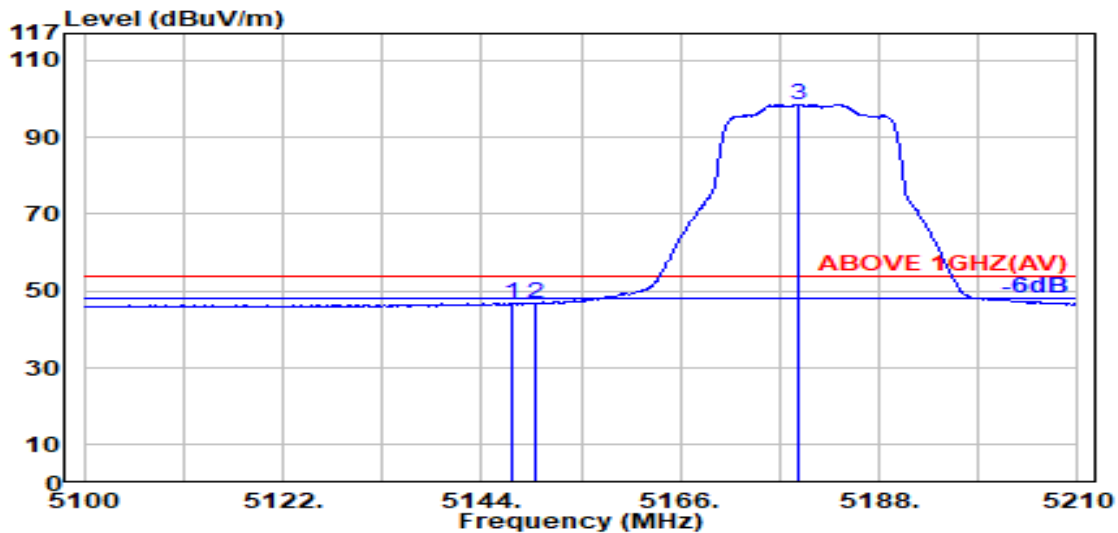


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	33.50	8.37	39.19	44.17	46.84	54.00	7.16	Average
5150.000	33.50	8.37	39.19	43.95	46.63	54.00	7.37	Average
@ 5179.100	33.67	8.40	39.19	95.76	98.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

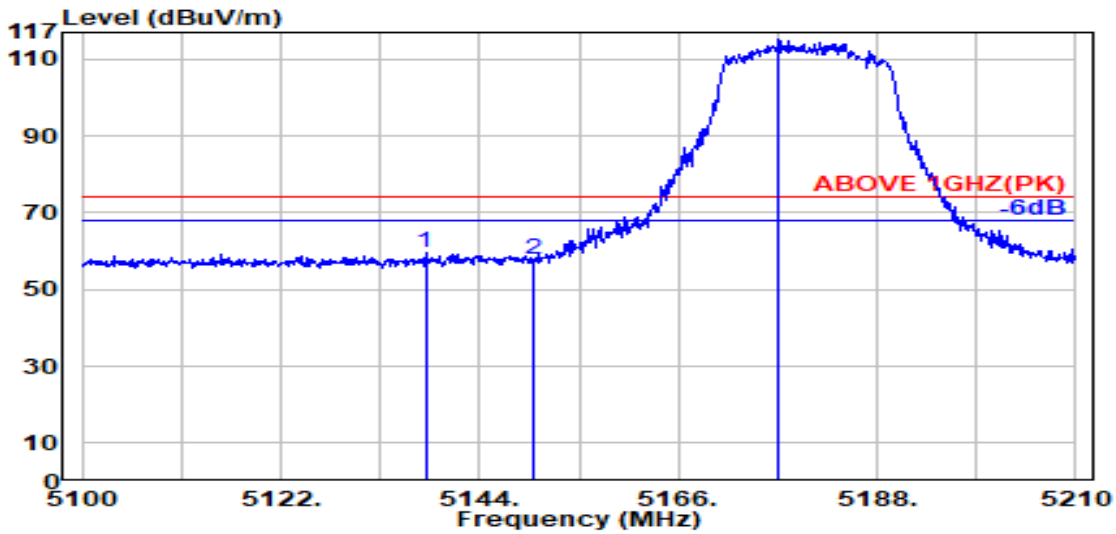

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.000	33.48	8.36	39.19	57.07	59.72	74.00	14.28	Peak
5150.000	33.50	8.37	39.19	55.27	57.95	74.00	16.05	Peak
@ 5177.100	33.66	8.40	39.19	112.19	115.06	---	---	Peak

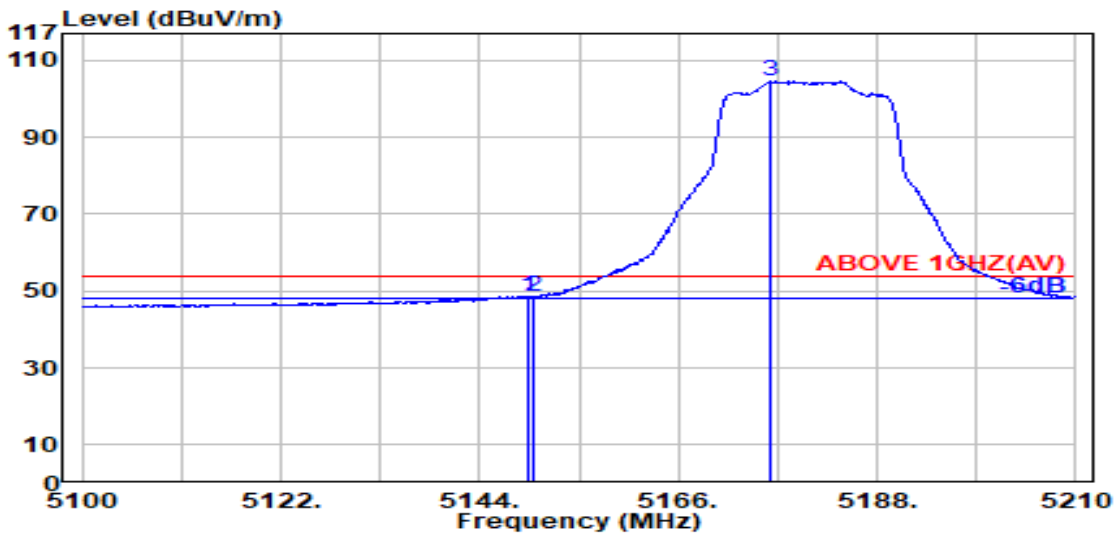

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.19	46.04	48.72	54.00	5.28	Average
5150.000	33.50	8.37	39.19	46.05	48.73	54.00	5.27	Average
@ 5176.200	33.66	8.40	39.19	101.67	104.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

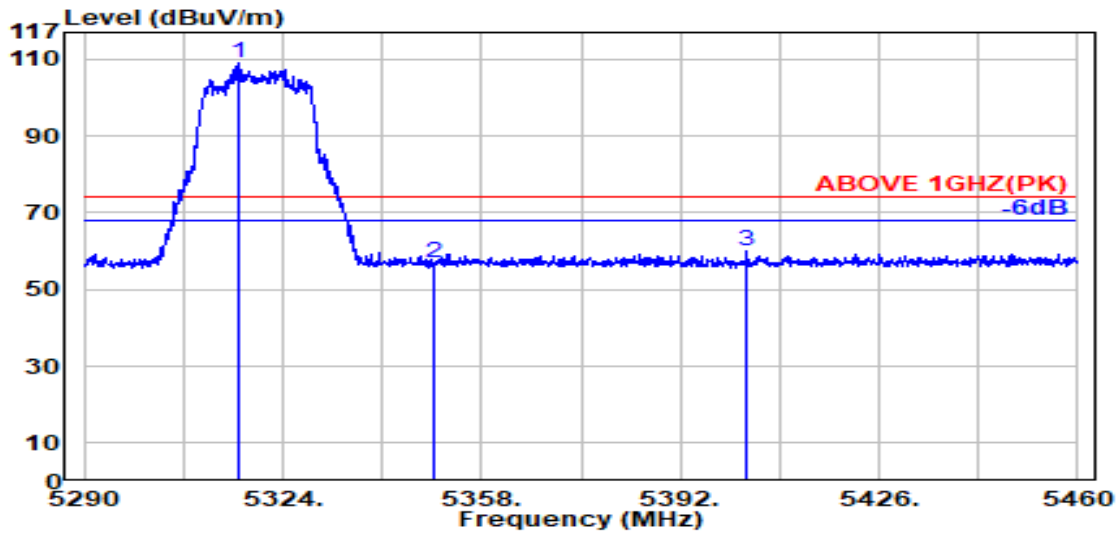

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.300	33.77	8.54	39.17	105.72	108.85	---	---	Peak
5350.000	33.70	8.57	39.17	53.84	56.94	74.00	17.06	Peak
5403.200	33.91	8.62	39.16	56.49	59.86	74.00	14.14	Peak

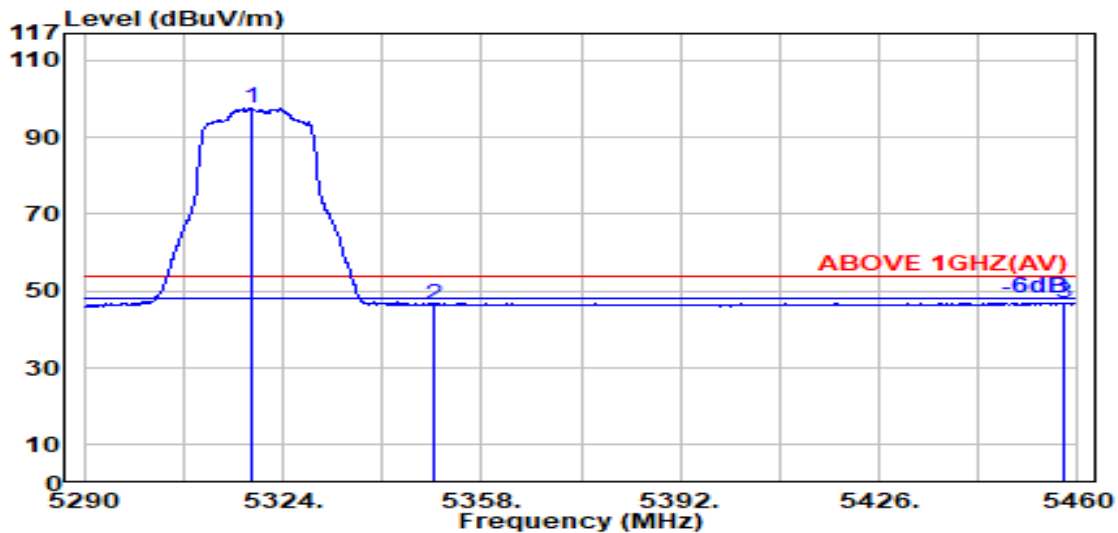

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.500	33.76	8.54	39.17	94.40	97.53	---	---	Average
5350.000	33.70	8.57	39.17	43.44	46.55	54.00	7.45	Average
5457.700	34.02	8.68	39.15	43.39	46.93	54.00	7.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

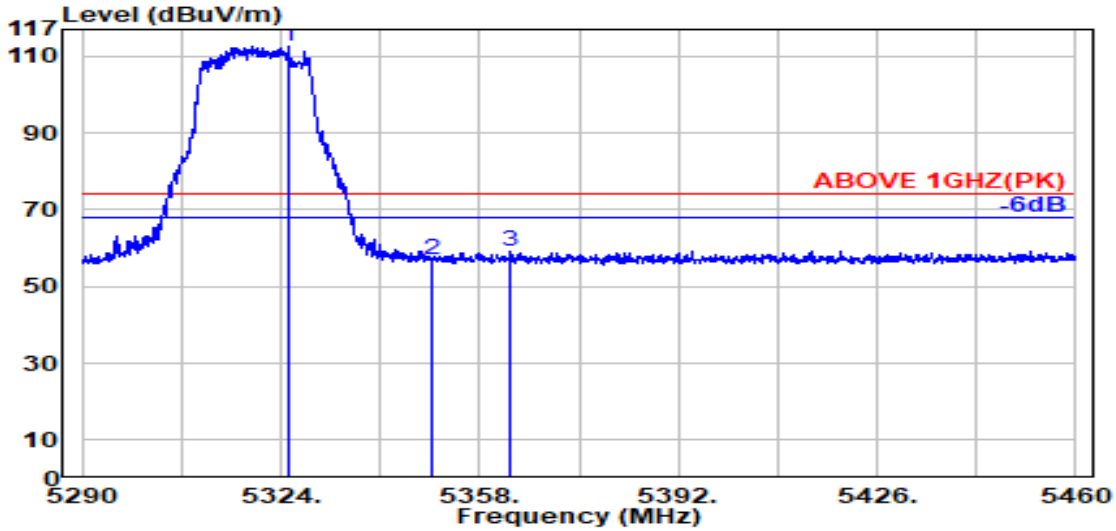

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.200	33.75	8.55	39.17	109.57	112.70	---	---	Peak
5350.000	33.70	8.57	39.17	53.91	57.01	74.00	16.99	Peak
5363.400	33.75	8.59	39.17	56.10	59.27	74.00	14.73	Peak

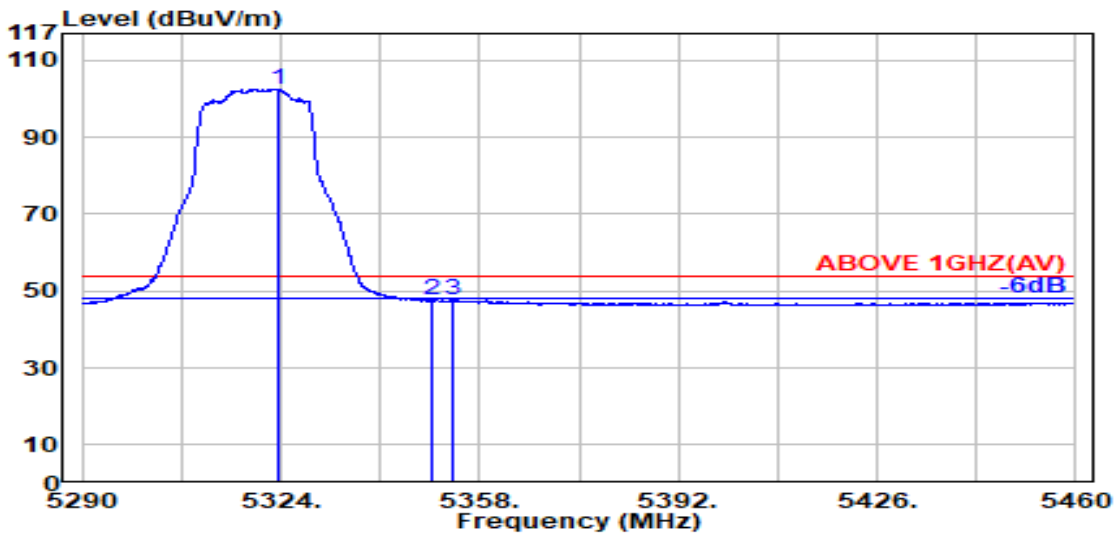

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	33.75	8.55	39.17	99.50	102.62	---	---	Average
5350.000	33.70	8.57	39.17	44.37	47.47	54.00	6.53	Average
5353.200	33.71	8.58	39.17	44.50	47.63	54.00	6.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

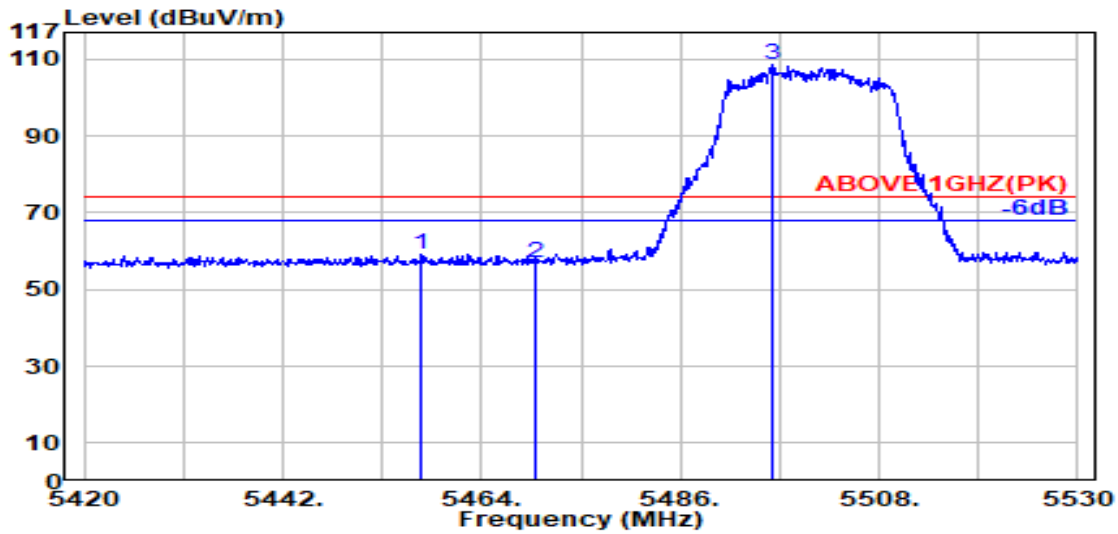

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.400	34.01	8.68	39.15	55.52	59.05	74.00	14.95	Peak
5470.000	34.04	8.69	39.15	53.54	57.11	74.00	16.89	Peak
@ 5496.100	34.09	8.71	39.15	105.14	108.80	---	---	Peak

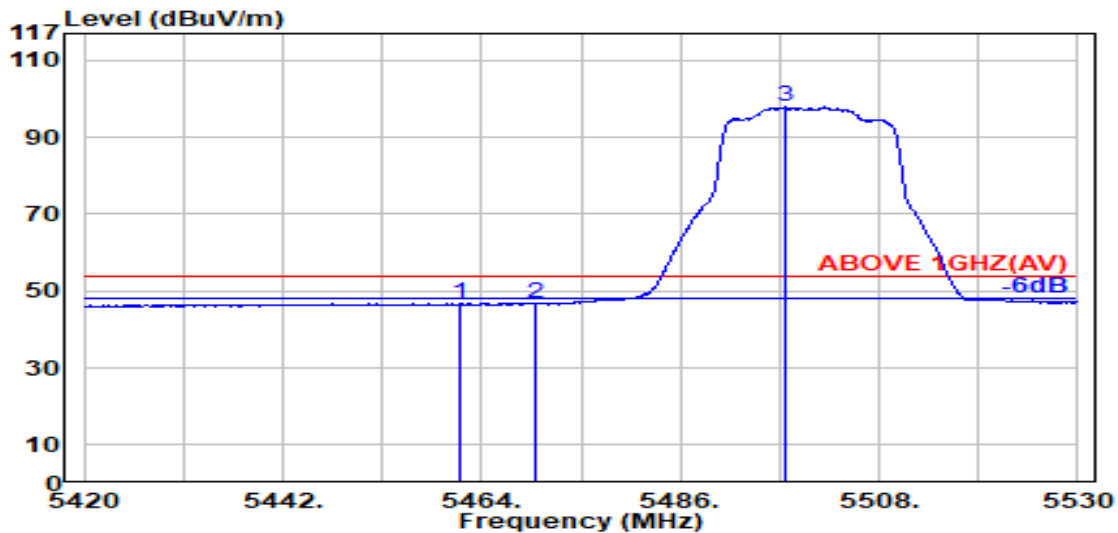

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.600	34.02	8.68	39.15	43.27	46.82	54.00	7.18	Average
5470.000	34.04	8.69	39.15	43.04	46.61	54.00	7.39	Average
@ 5497.600	34.10	8.71	39.15	94.24	97.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.



Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

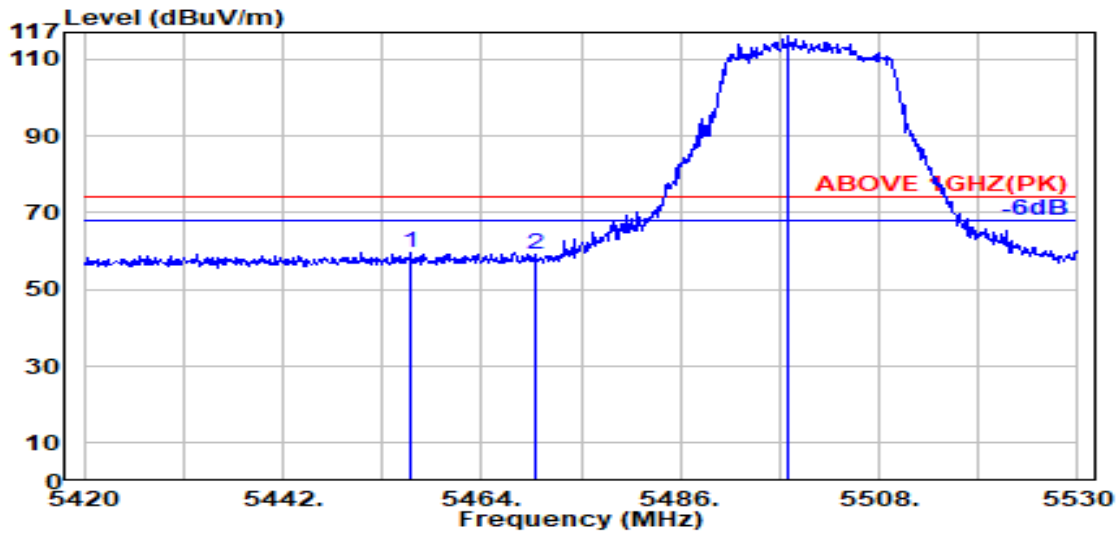

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.100	34.01	8.67	39.16	56.29	59.82	74.00	14.18	Peak
5470.000	34.04	8.69	39.15	55.58	59.16	74.00	14.84	Peak
@ 5497.900	34.10	8.71	39.15	112.36	116.02	---	---	Peak

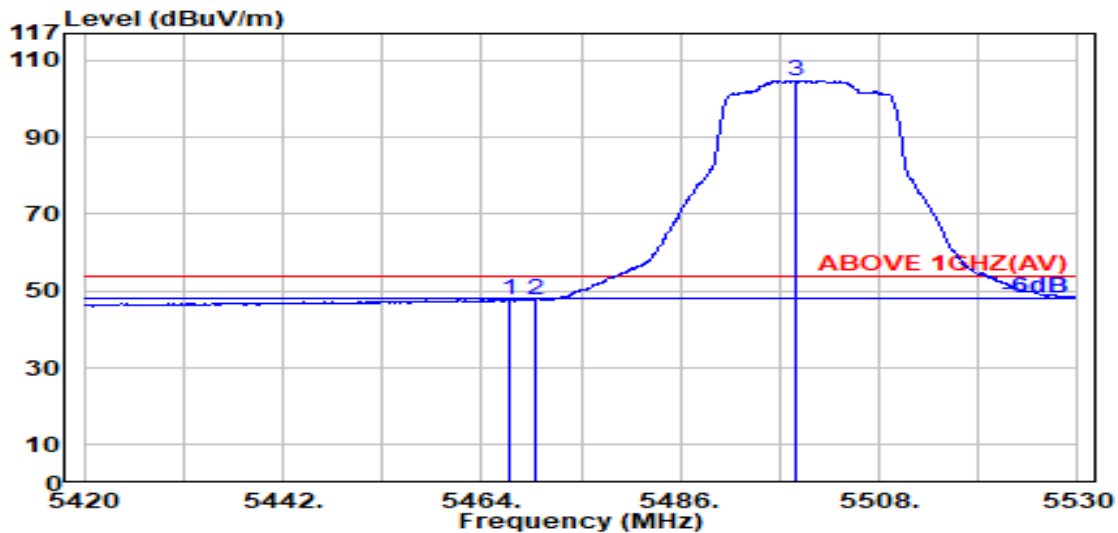

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.15	44.24	47.80	54.00	6.20	Average
5470.000	34.04	8.69	39.15	44.18	47.76	54.00	6.24	Average
@ 5498.900	34.10	8.72	39.15	101.14	104.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

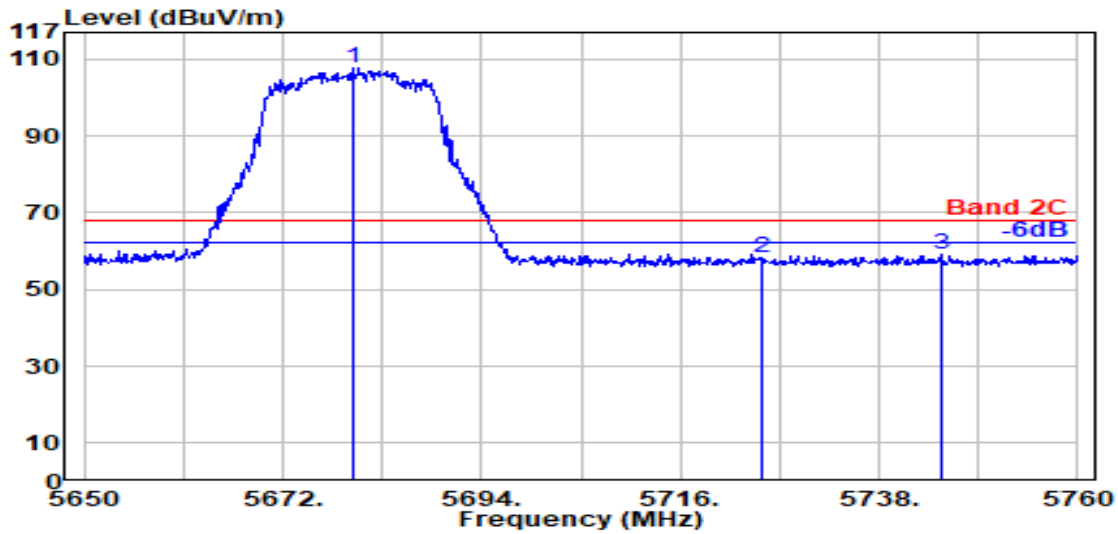

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.700	33.68	8.88	39.19	104.28	107.66	---	---	Peak
5725.000	33.60	8.93	39.20	54.95	58.28	68.20	9.92	Peak
5744.900	33.60	8.94	39.20	55.63	58.97	68.20	9.23	Peak

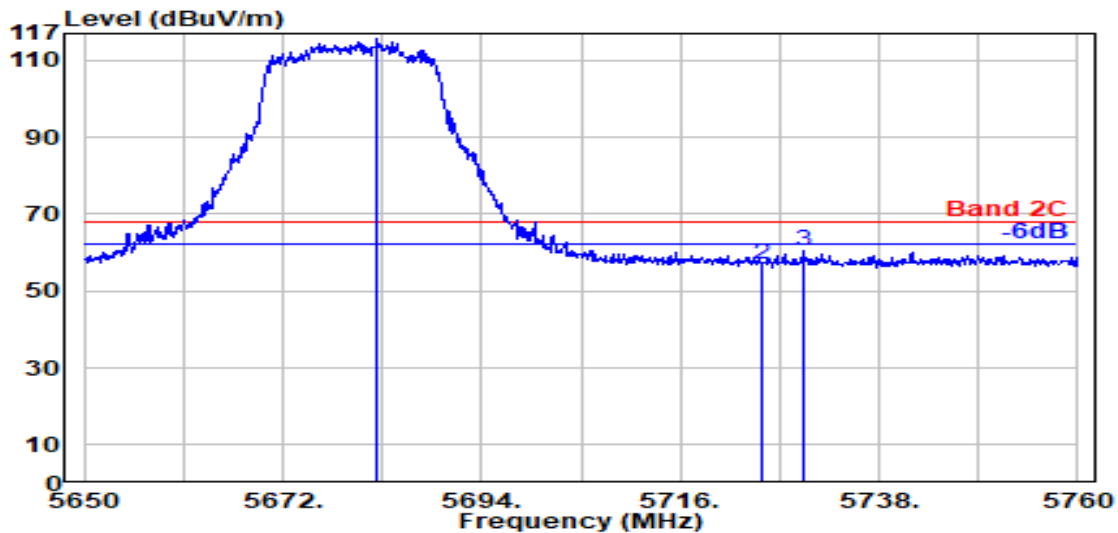


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.500	33.67	8.89	39.19	112.30	115.67	---	---	Peak
5725.000	33.60	8.93	39.20	53.71	57.04	68.20	11.16	Peak
5729.600	33.60	8.93	39.20	56.94	60.28	68.20	7.92	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

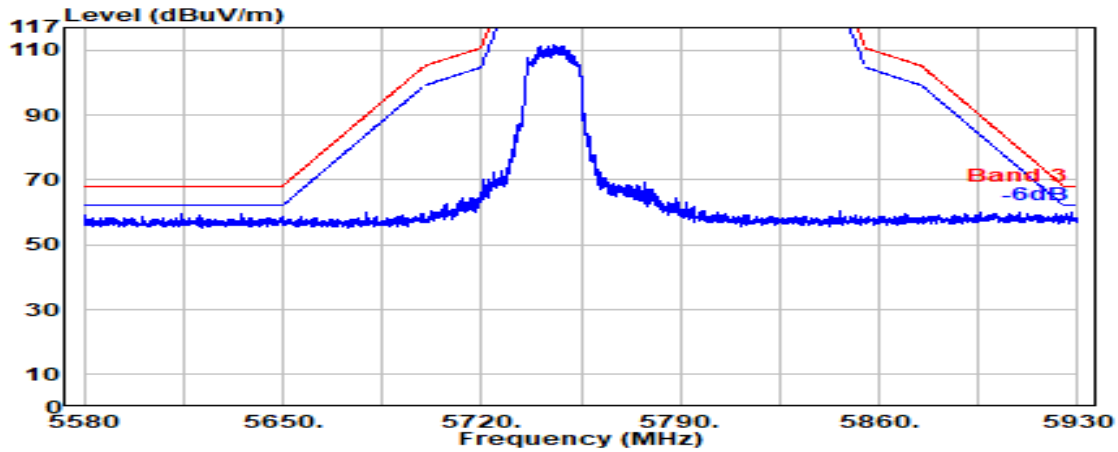


Antenna at Vertical Polarization

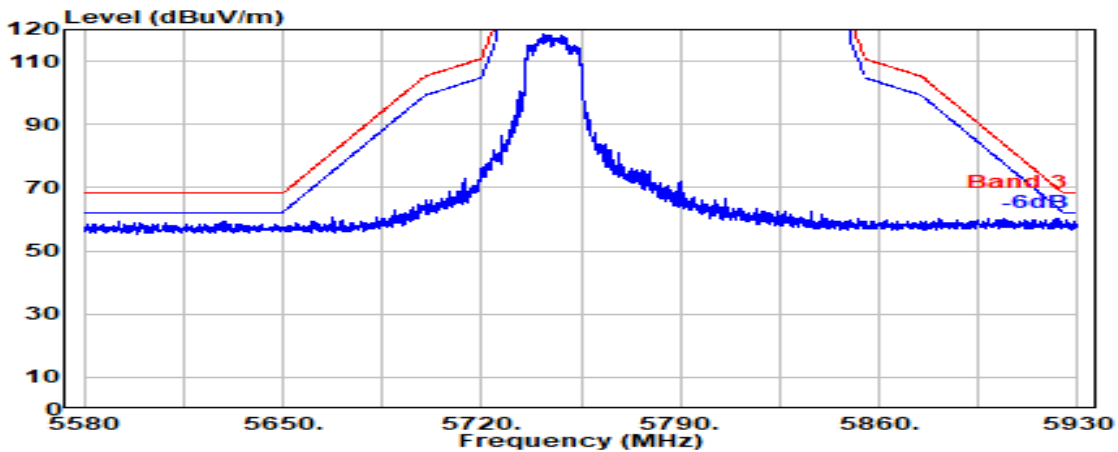


Mode	802.11be-EHT40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz

Antenna at Horizontal Polarization

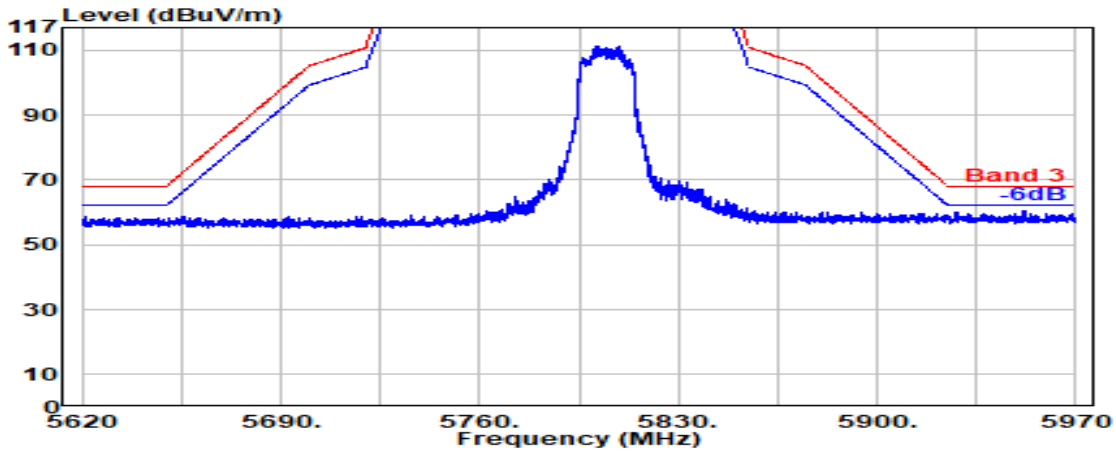


Antenna at Vertical Polarization

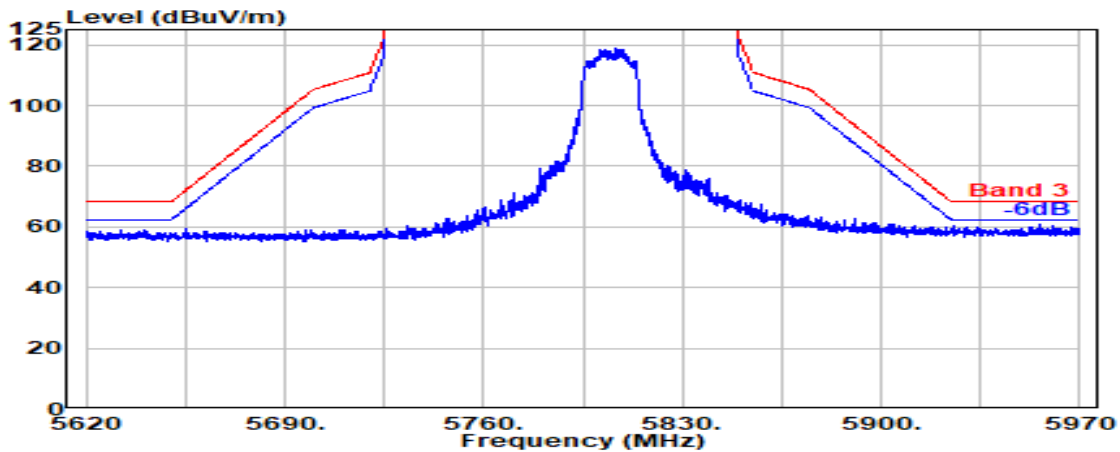

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

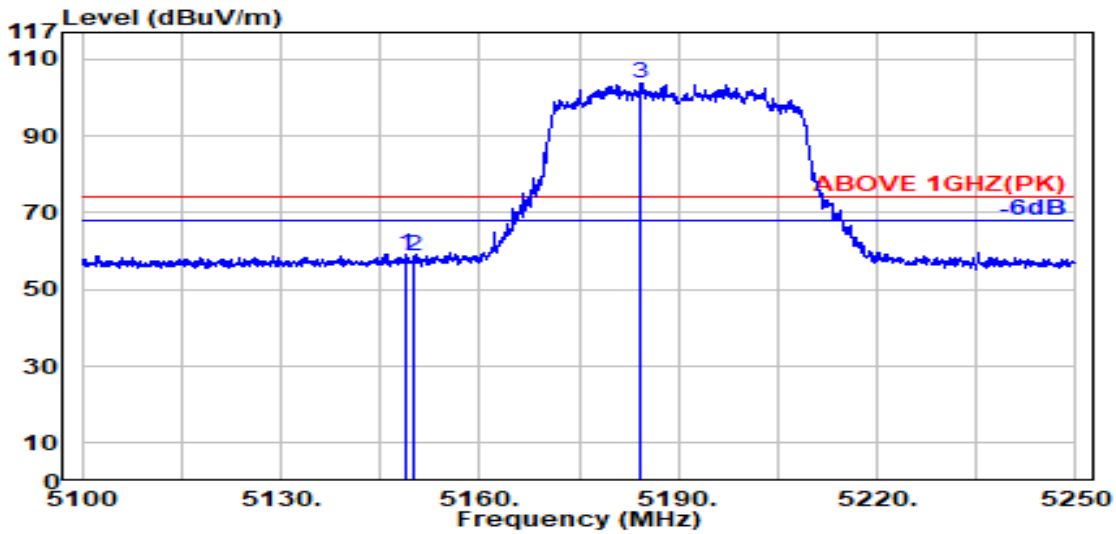

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.19	56.67	59.35	74.00	14.65	Peak
5150.000	33.50	8.37	39.19	55.82	58.51	74.00	15.49	Peak
@ 5184.400	33.71	8.41	39.19	100.81	103.74	---	---	Peak

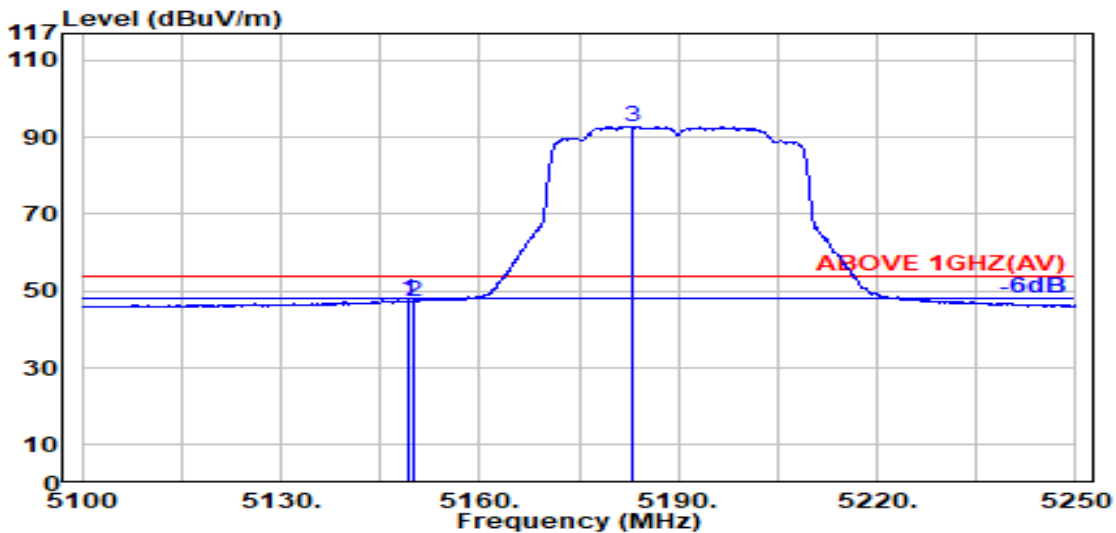

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	44.93	47.61	54.00	6.39	Average
5150.000	33.50	8.37	39.19	44.69	47.37	54.00	6.63	Average
@ 5183.000	33.70	8.41	39.19	89.89	92.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

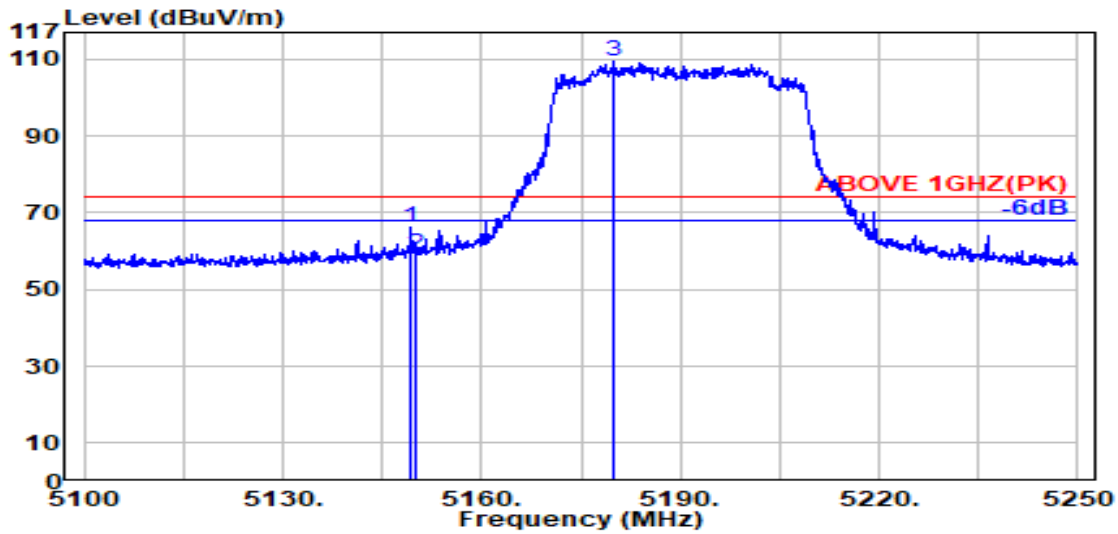

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	63.68	66.36	74.00	7.64	Peak
5150.000	33.50	8.37	39.19	56.49	59.18	74.00	14.82	Peak
@ 5180.000	33.68	8.40	39.19	106.65	109.55	---	---	Peak

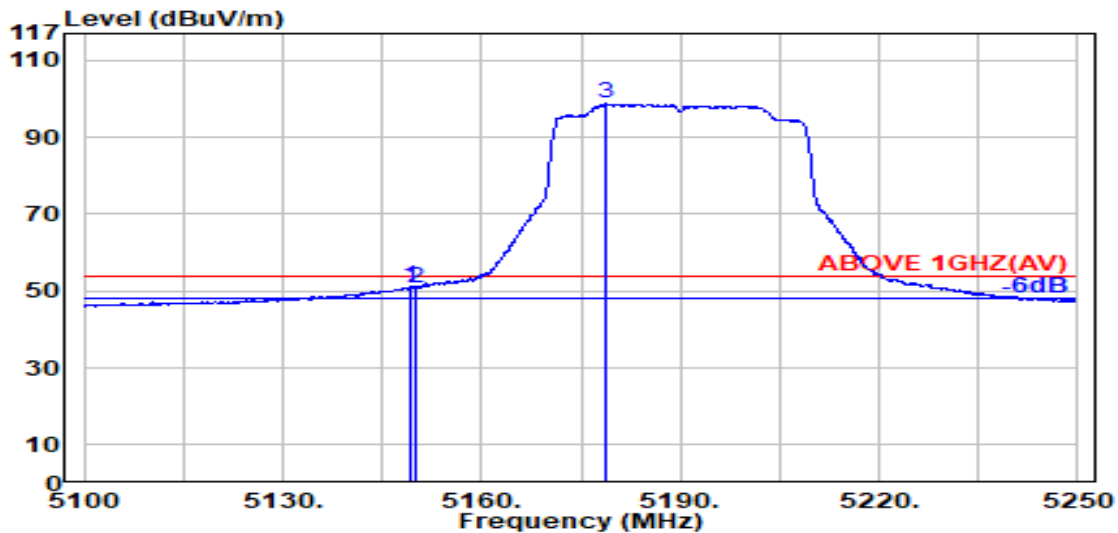

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	48.52	51.20	54.00	2.80	Average
5150.000	33.50	8.37	39.19	48.27	50.95	54.00	3.05	Average
@ 5178.600	33.67	8.40	39.19	95.82	98.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

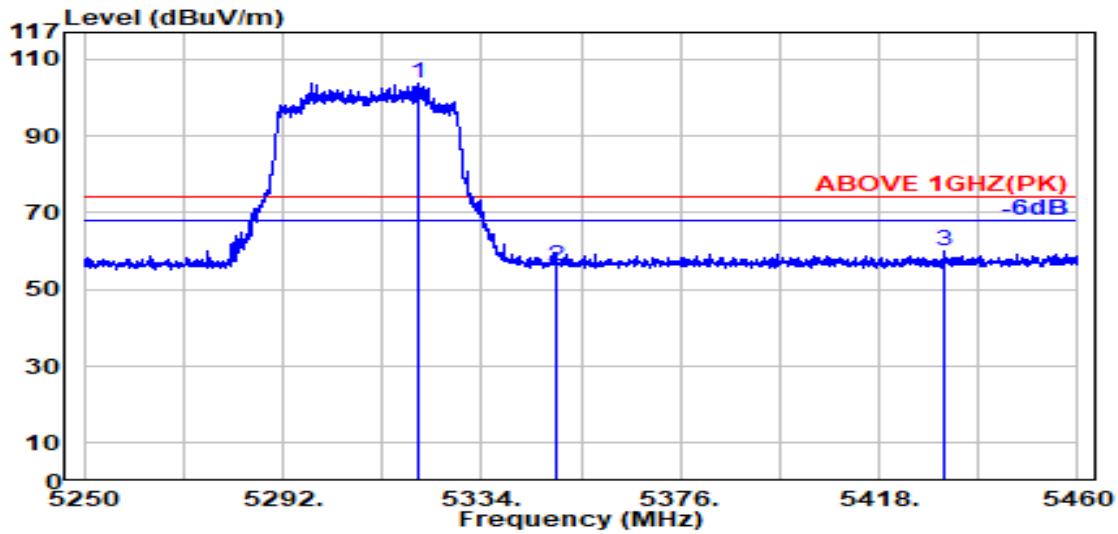

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.800	33.76	8.54	39.17	100.51	103.64	---	---	Peak
5350.000	33.70	8.57	39.17	53.17	56.27	74.00	17.73	Peak
5431.800	33.96	8.65	39.16	56.66	60.12	74.00	13.88	Peak

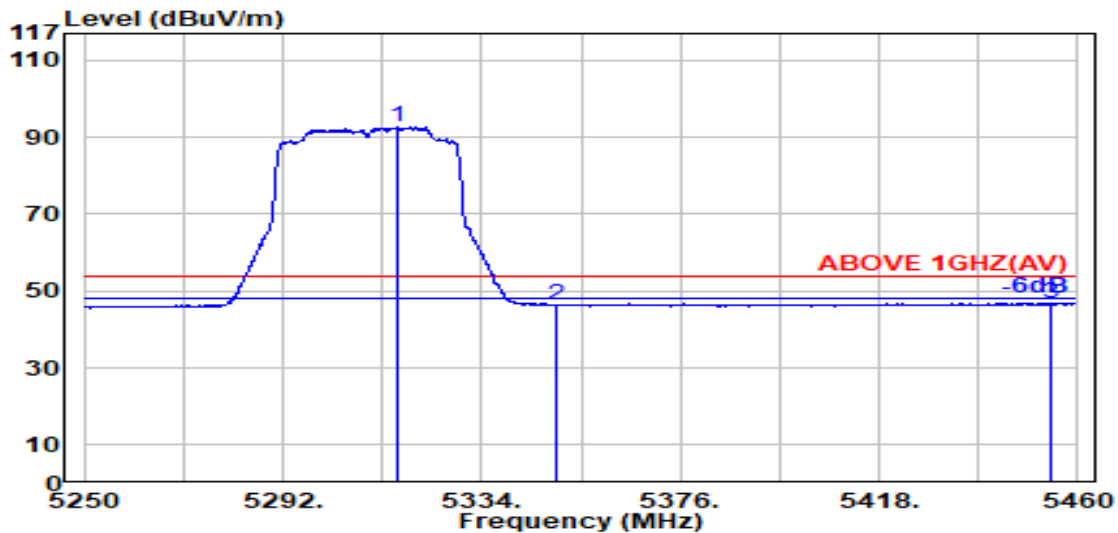

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.77	8.54	39.17	89.51	92.64	---	---	Average
5350.000	33.70	8.57	39.17	43.23	46.34	54.00	7.66	Average
5454.500	34.01	8.67	39.16	43.39	46.92	54.00	7.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

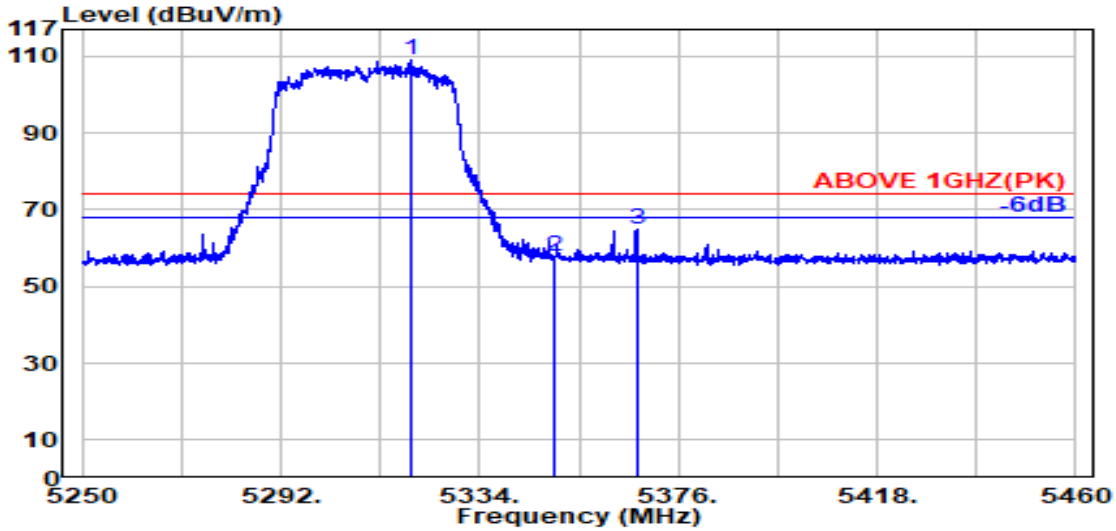

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.500	33.76	8.54	39.17	105.99	109.12	---	---	Peak
5350.000	33.70	8.57	39.17	54.90	58.01	74.00	15.99	Peak
5367.200	33.77	8.59	39.17	61.91	65.11	74.00	8.89	Peak

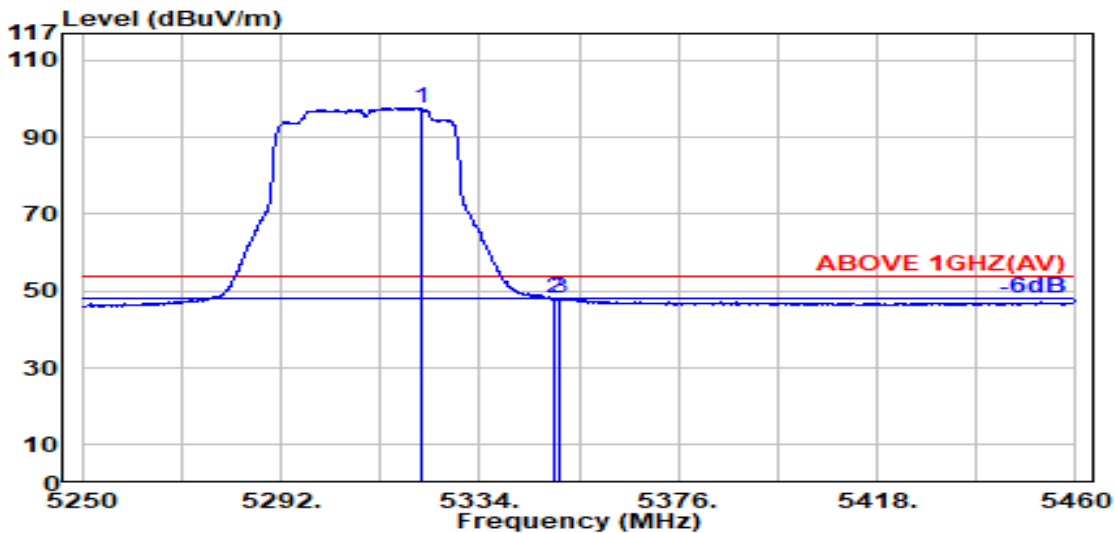

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.600	33.76	8.54	39.17	94.63	97.76	---	---	Average
5350.000	33.70	8.57	39.17	44.83	47.93	54.00	6.07	Average
5351.100	33.70	8.57	39.17	44.92	48.03	54.00	5.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.



Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

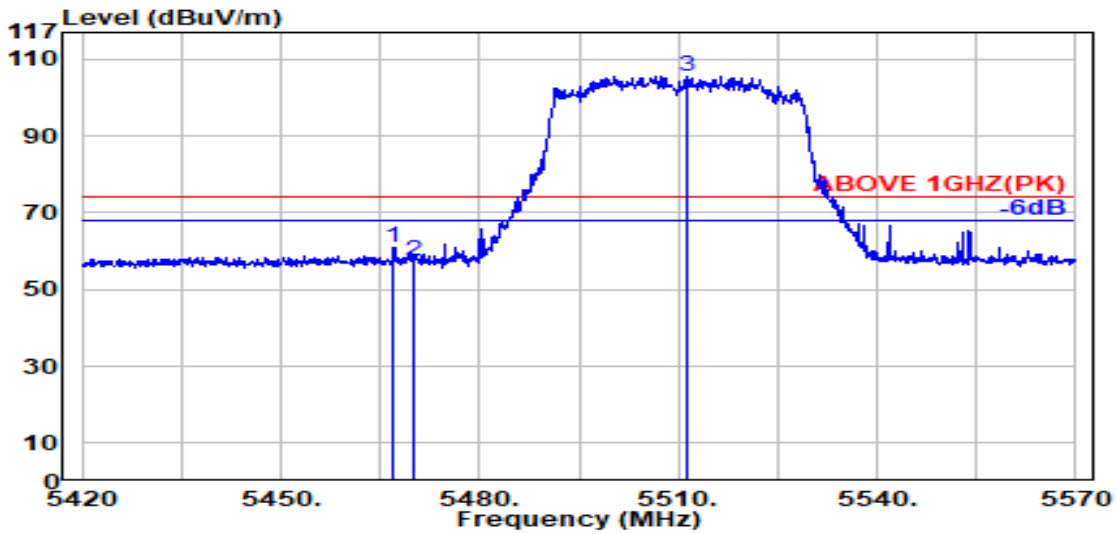

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.15	57.57	61.14	74.00	12.86	Peak
5470.000	34.04	8.69	39.15	53.64	57.21	74.00	16.79	Peak
@ 5511.200	34.08	8.73	39.15	102.02	105.68	---	---	Peak

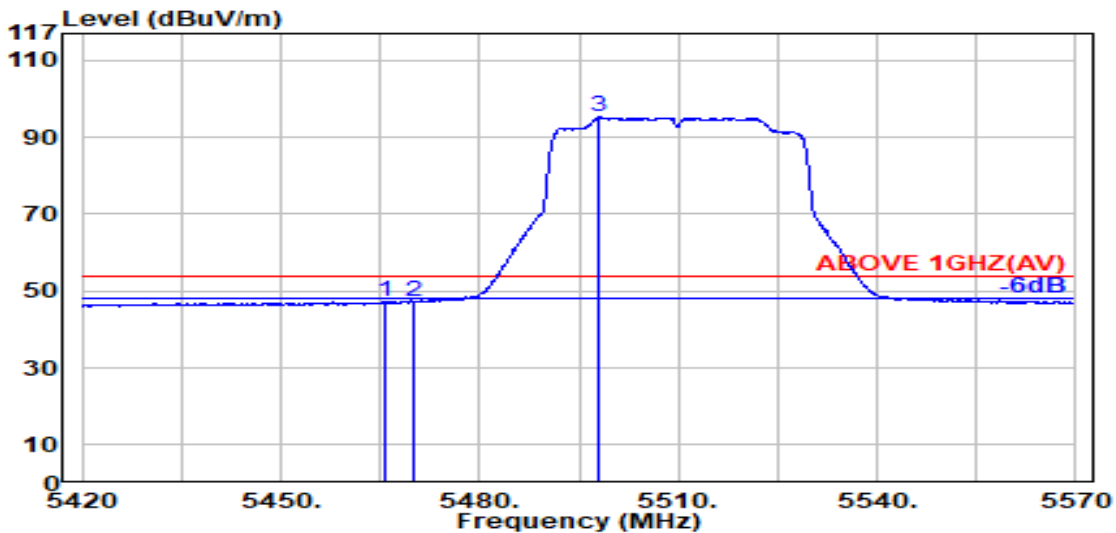

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.03	8.68	39.15	43.79	47.35	54.00	6.65	Average
5470.000	34.04	8.69	39.15	43.54	47.12	54.00	6.88	Average
@ 5498.100	34.10	8.71	39.15	91.73	95.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

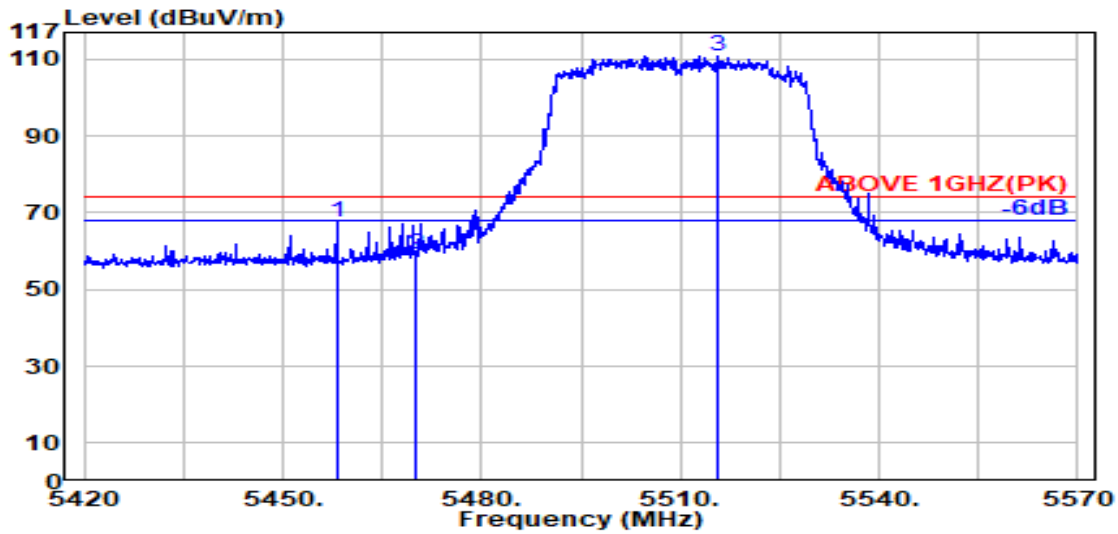

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.200	34.02	8.68	39.15	63.97	67.51	74.00	6.49	Peak
5470.000	34.04	8.69	39.15	55.50	59.08	74.00	14.92	Peak
@ 5515.600	34.07	8.73	39.15	107.27	110.92	---	---	Peak

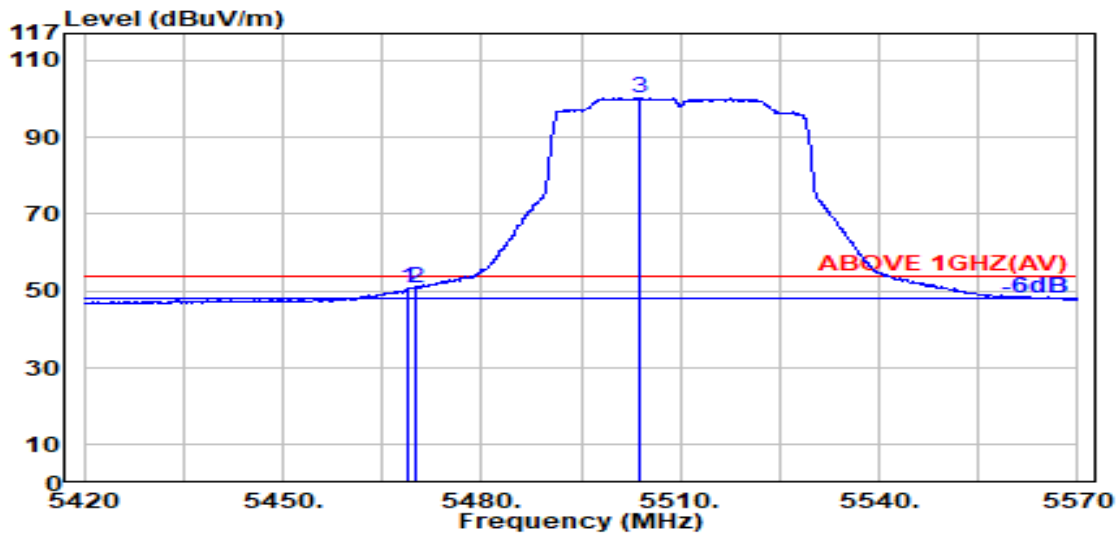

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	47.04	50.61	54.00	3.39	Average
5470.000	34.04	8.69	39.15	47.16	50.73	54.00	3.27	Average
@ 5503.800	34.09	8.72	39.15	96.74	100.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

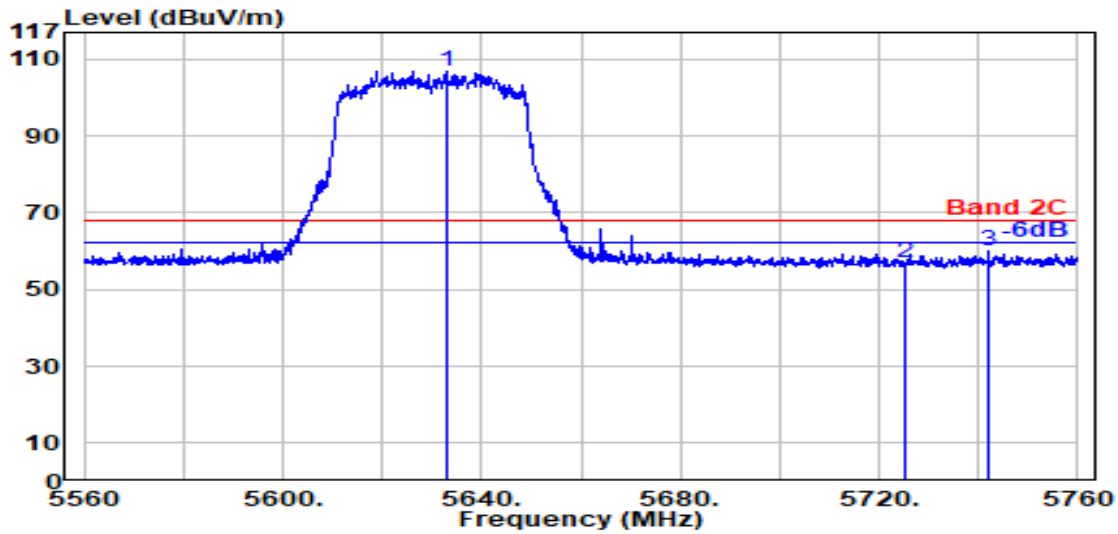

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5632.800	33.80	8.84	39.18	103.57	107.04	---	---	Peak
5725.000	33.60	8.93	39.20	53.57	56.90	68.20	11.30	Peak
5741.900	33.60	8.94	39.20	56.53	59.87	68.20	8.33	Peak

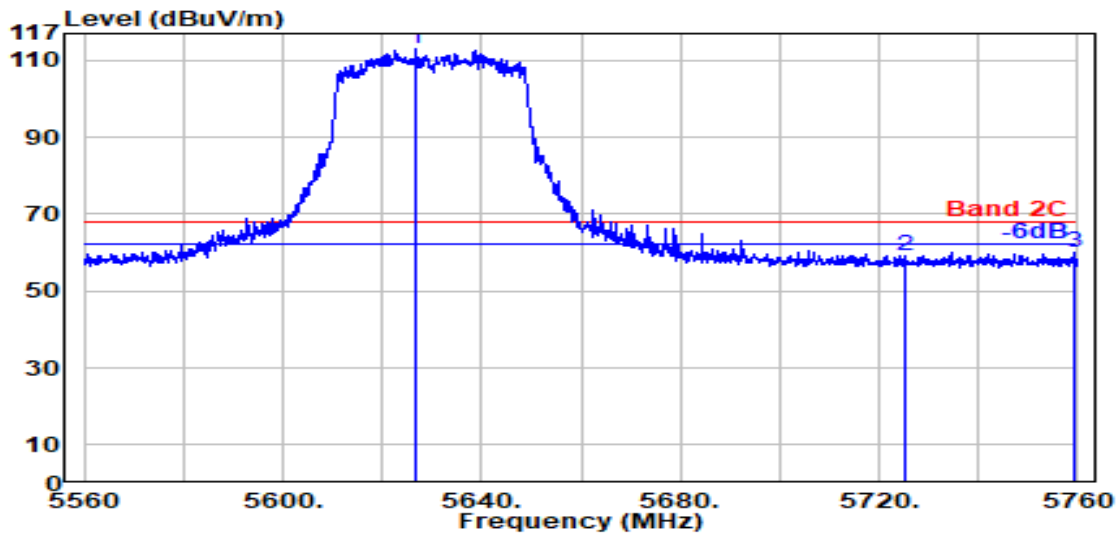


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.800	33.80	8.84	39.18	109.47	112.93	---	---	Peak
5725.000	33.60	8.93	39.20	55.87	59.20	68.20	9.00	Peak
5759.200	33.64	8.96	39.20	56.61	60.00	68.20	8.20	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

## Antenna at Horizontal Polarization

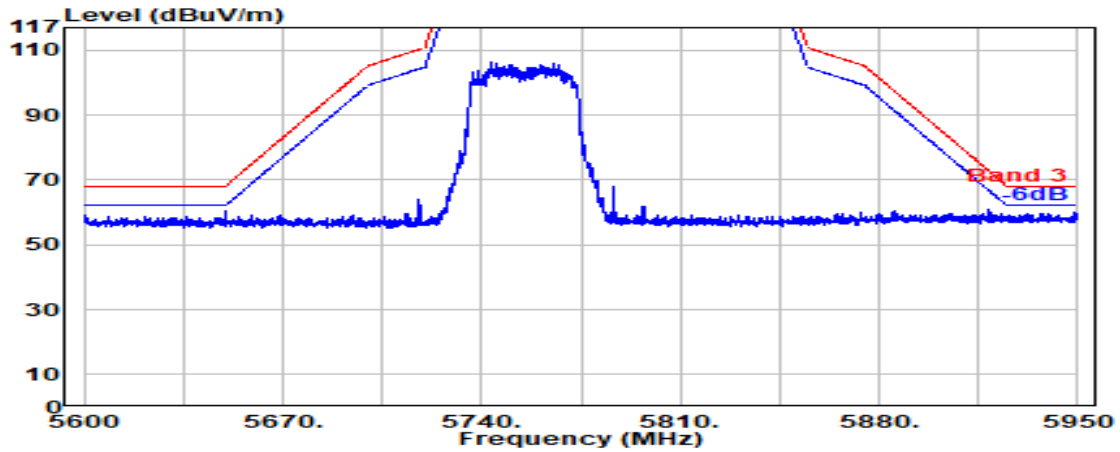


## Antenna at Vertical Polarization

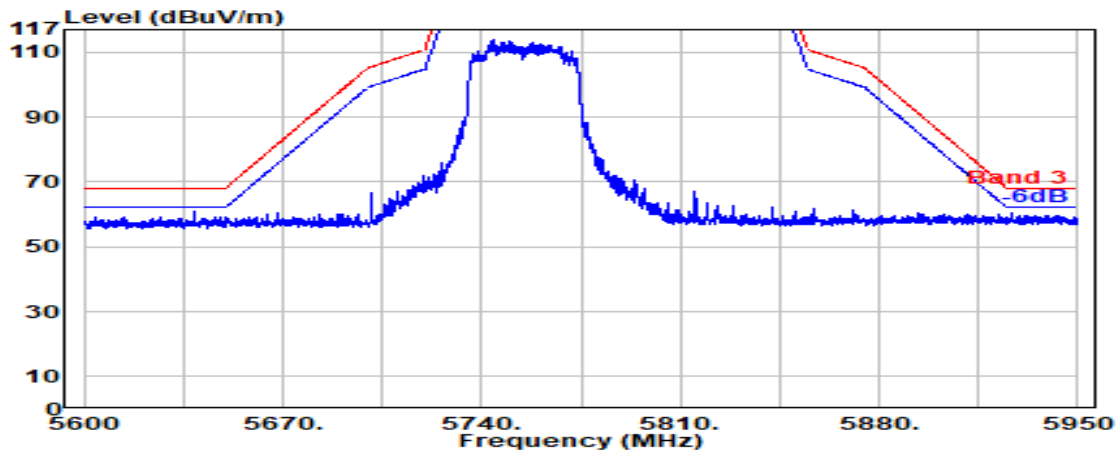


Mode	802.11be-EHT80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

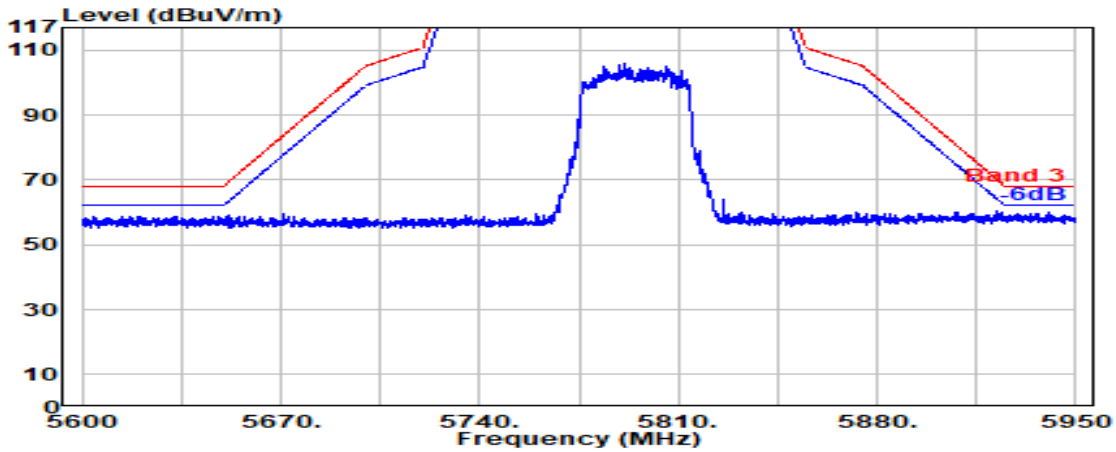

Antenna at Vertical Polarization

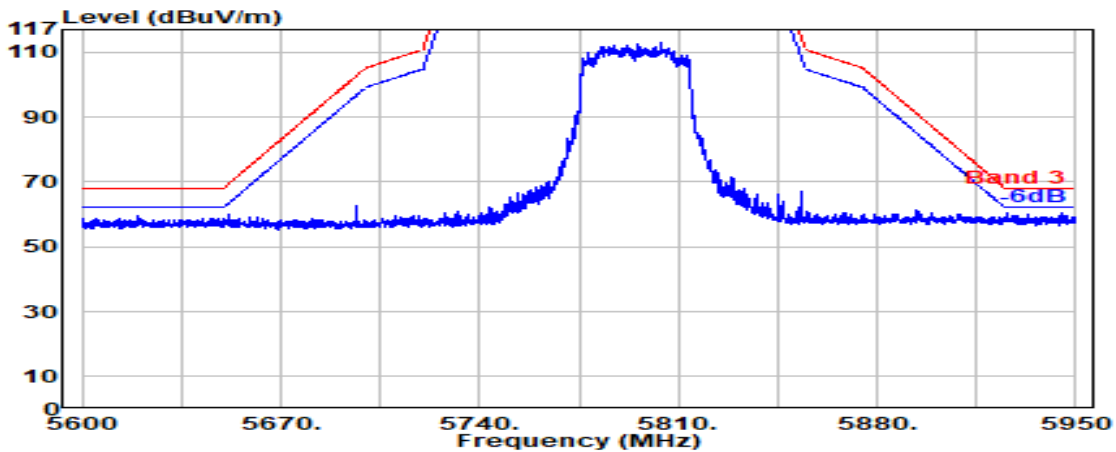


Mode	802.11be-EHT160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

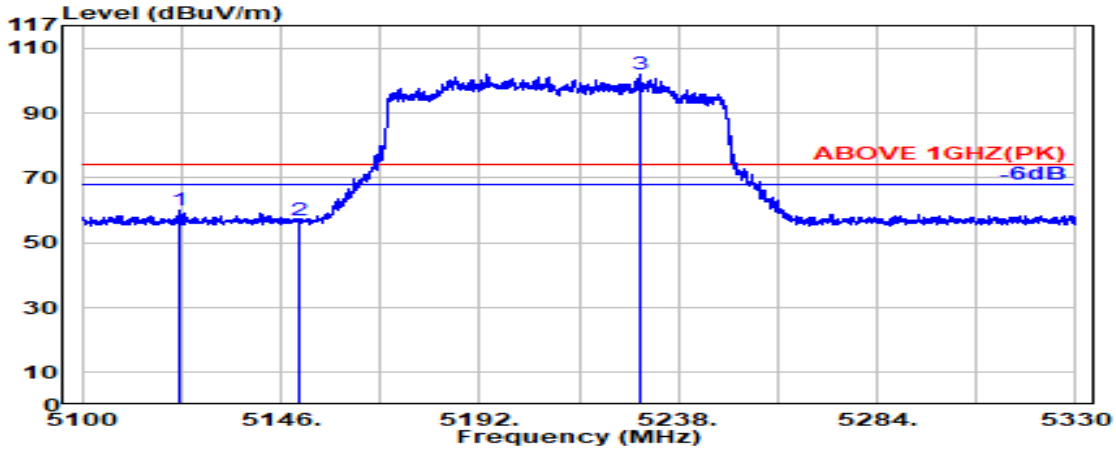

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.800	33.45	8.35	39.19	57.33	59.93	74.00	14.07	Peak
5150.000	33.50	8.37	39.19	54.36	57.05	74.00	16.95	Peak
@ 5229.200	33.74	8.45	39.18	99.07	102.08	---	---	Peak

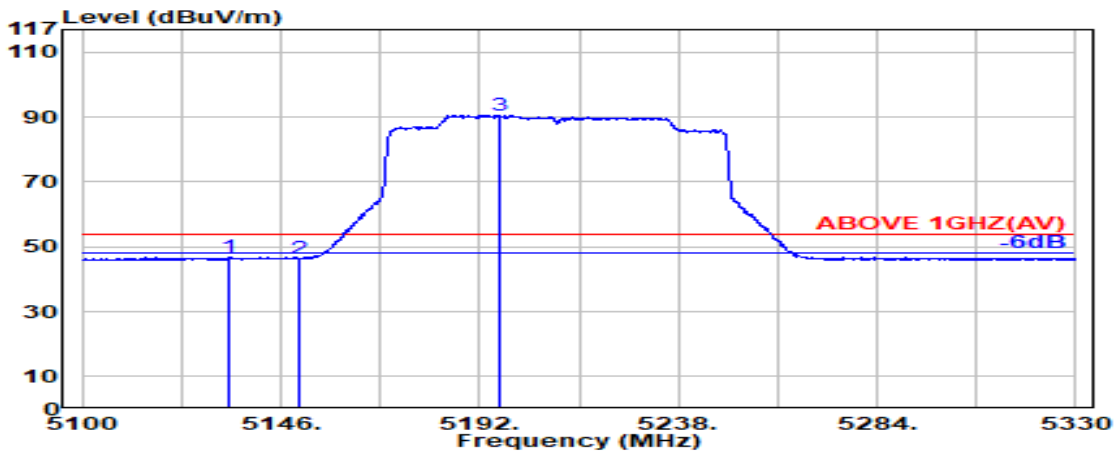


Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.200	33.47	8.36	39.19	44.15	46.78	54.00	7.22	Average
5150.000	33.50	8.37	39.19	43.74	46.42	54.00	7.58	Average
@ 5196.800	33.78	8.42	39.19	87.57	90.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

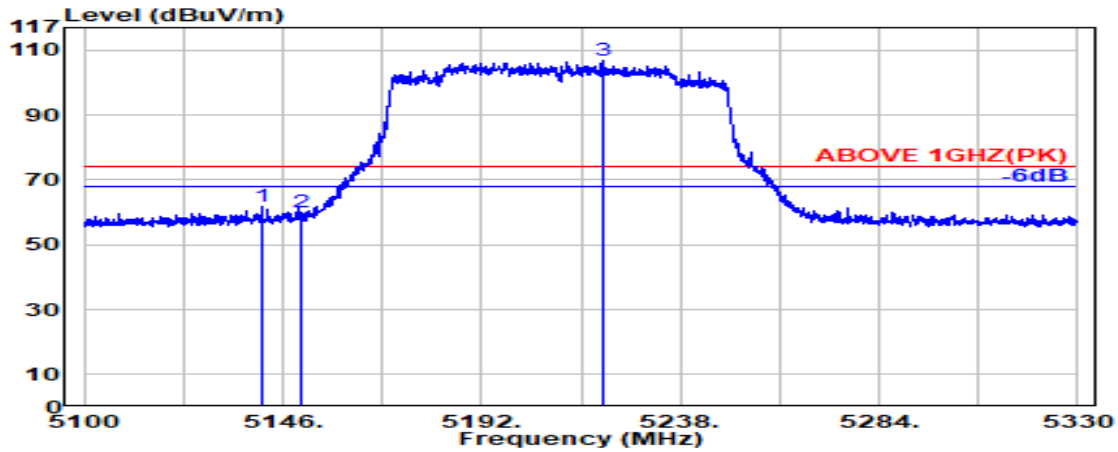
**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.300	33.48	8.37	39.19	59.36	62.02	74.00	11.98	Peak
5150.000	33.50	8.37	39.19	57.45	60.13	74.00	13.87	Peak
@ 5220.100	33.76	8.44	39.18	103.95	106.97	---	---	Peak

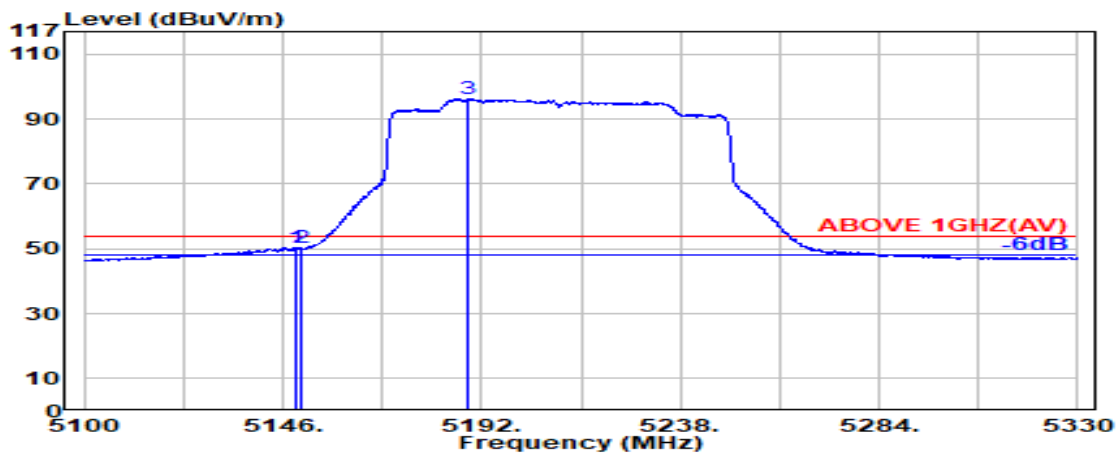
**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.50	8.37	39.19	47.75	50.43	54.00	3.57	Average
5150.000	33.50	8.37	39.19	47.59	50.27	54.00	3.73	Average
@ 5189.000	33.73	8.41	39.19	93.36	96.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

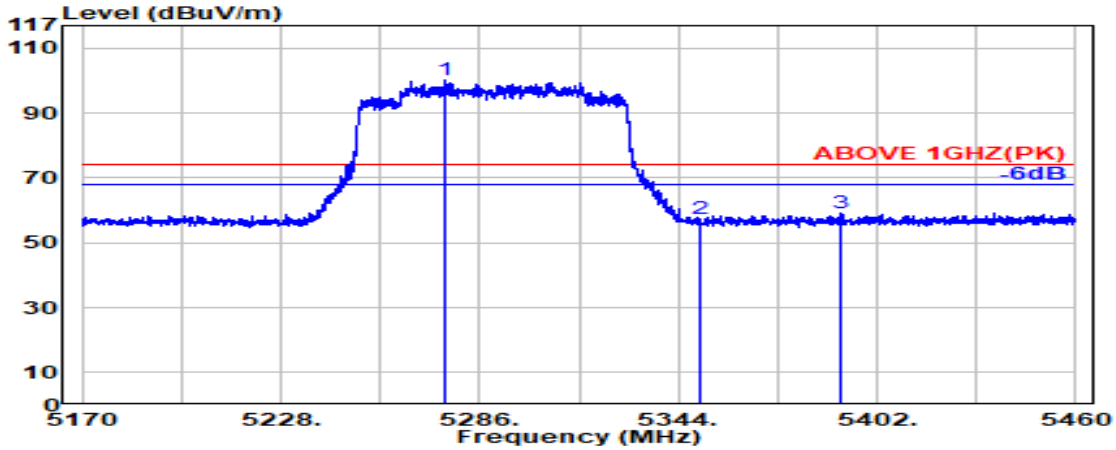

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.700	33.75	8.50	39.18	96.94	100.01	---	---	Peak
5350.000	33.70	8.57	39.17	54.11	57.22	74.00	16.78	Peak
5391.600	33.87	8.61	39.16	55.83	59.15	74.00	14.85	Peak

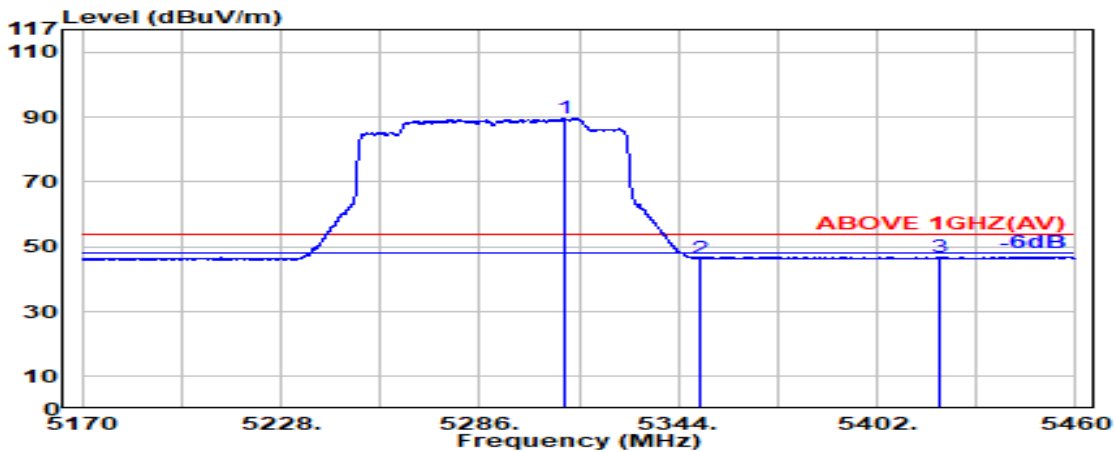


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.500	33.78	8.53	39.17	86.62	89.76	---	---	Average
5350.000	33.70	8.57	39.17	43.29	46.40	54.00	7.60	Average
5419.900	33.94	8.64	39.16	43.59	47.01	54.00	6.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11be-EHT160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

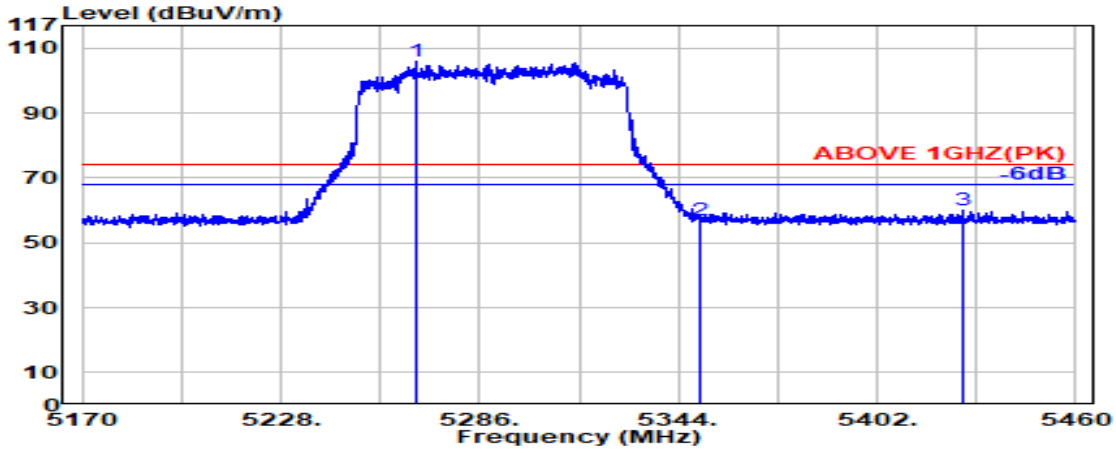

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.300	33.73	8.49	39.18	102.92	105.97	---	---	Peak
5350.000	33.70	8.57	39.17	53.98	57.08	74.00	16.92	Peak
5427.100	33.95	8.65	39.16	56.47	59.91	74.00	14.09	Peak

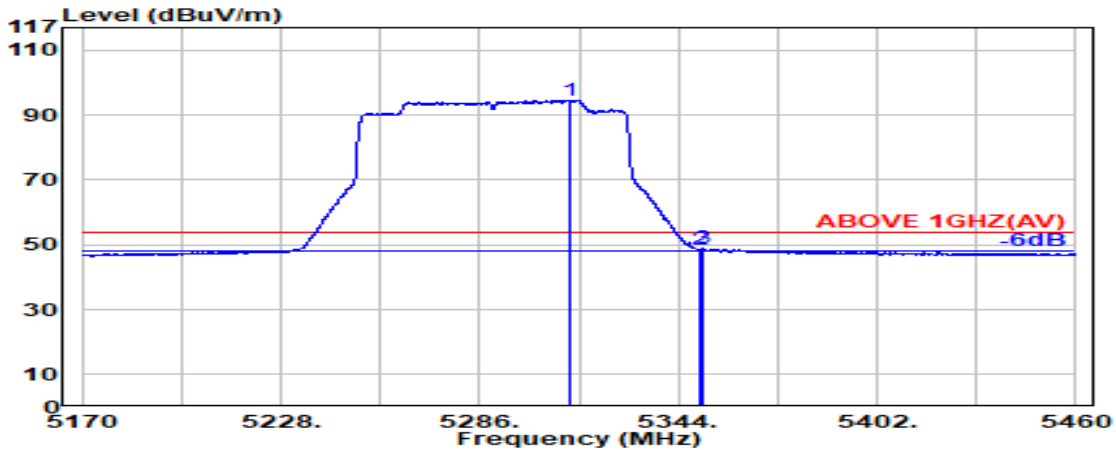


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.100	33.78	8.54	39.17	91.53	94.67	---	---	Average
5350.000	33.70	8.57	39.17	45.47	48.58	54.00	5.42	Average
5351.100	33.70	8.57	39.17	45.71	48.82	54.00	5.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

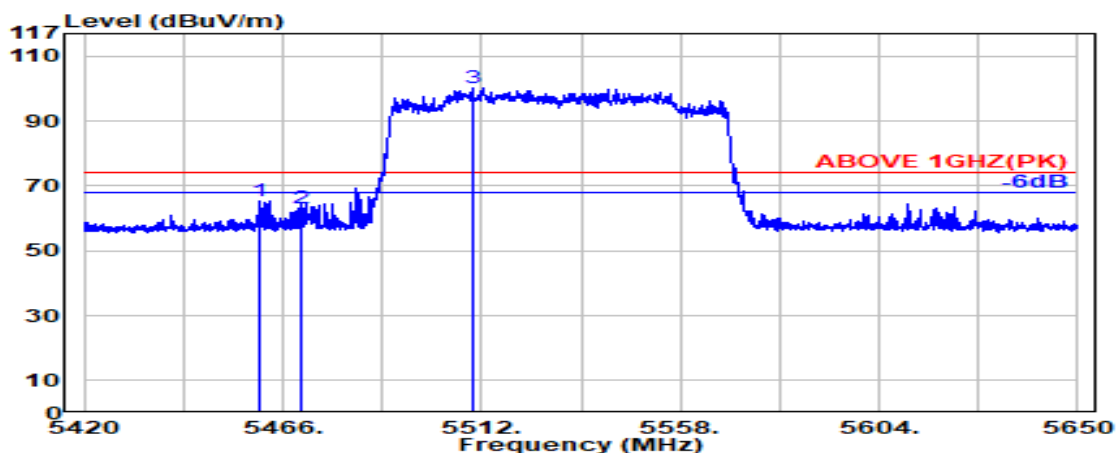

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.700	34.02	8.68	39.15	61.85	65.40	74.00	8.60	Peak
5470.000	34.04	8.69	39.15	59.50	63.08	74.00	10.92	Peak
@ 5509.800	34.08	8.73	39.15	96.52	100.17	---	---	Peak

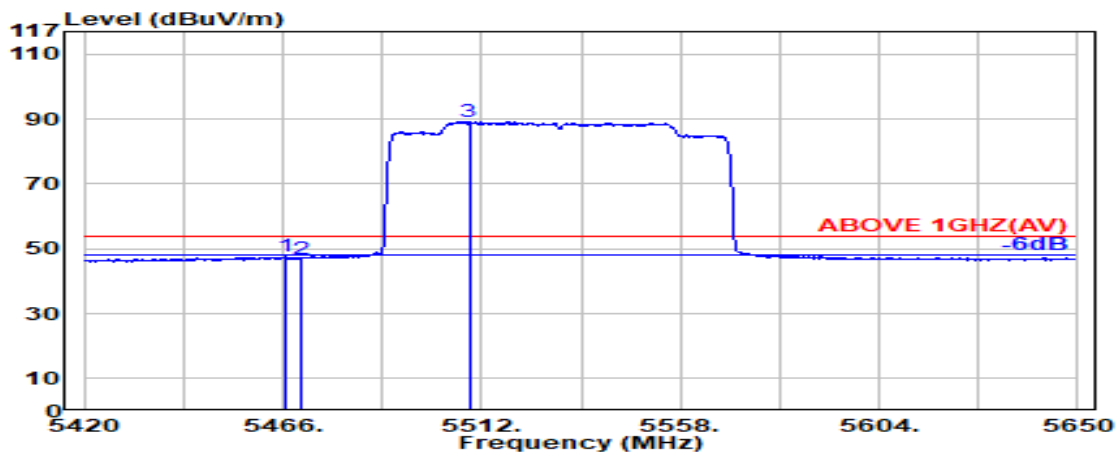


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.03	8.69	39.15	43.91	47.47	54.00	6.53	Average
5470.000	34.04	8.69	39.15	43.42	46.99	54.00	7.01	Average
@ 5509.100	34.08	8.73	39.15	85.62	89.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

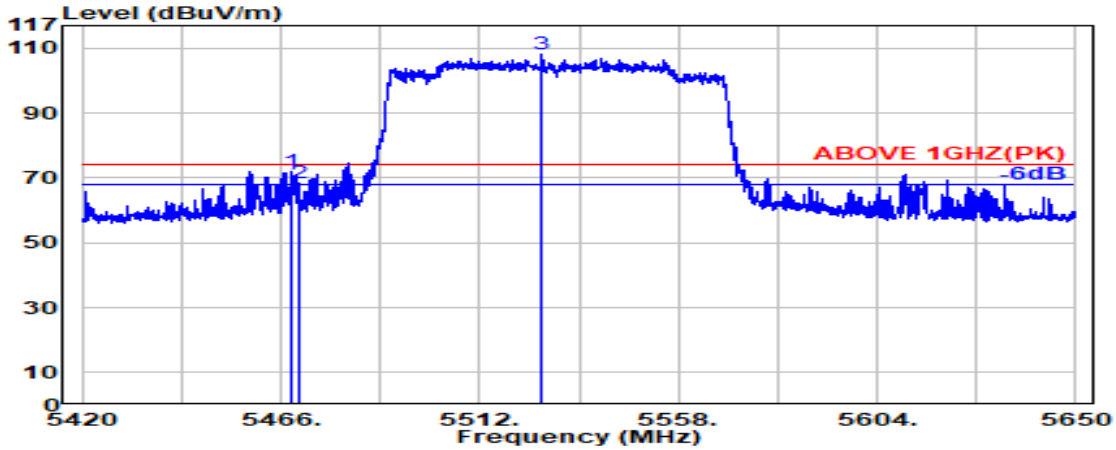

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	68.28	71.85	74.00	2.15	Peak
5470.000	34.04	8.69	39.15	64.93	68.51	74.00	5.49	Peak
@ 5526.300	34.05	8.74	39.16	104.54	108.17	---	---	Peak

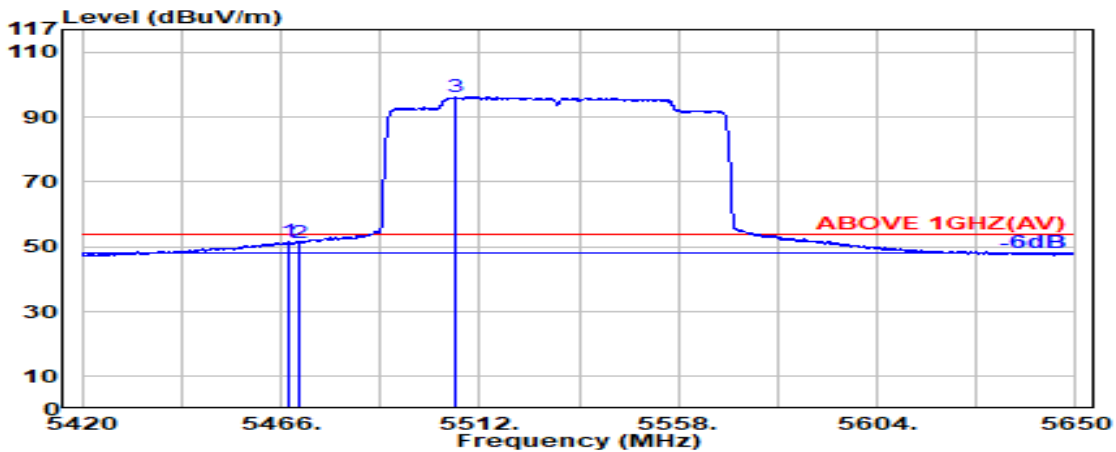


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.15	47.93	51.50	54.00	2.50	Average
5470.000	34.04	8.69	39.15	47.69	51.26	54.00	2.74	Average
@ 5506.500	34.09	8.72	39.15	92.63	96.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

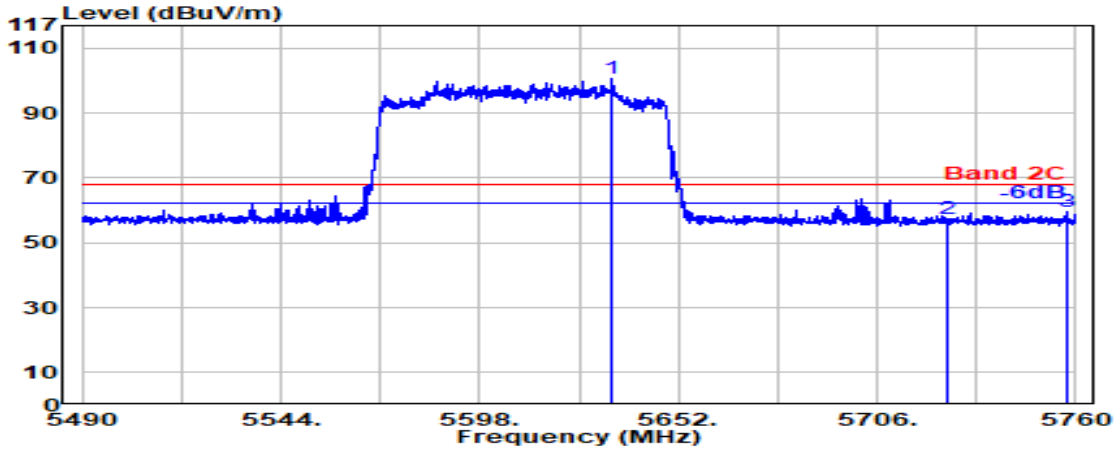

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5634.000	33.80	8.84	39.18	97.07	100.53	---	---	Peak
5725.000	33.60	8.93	39.20	53.99	57.32	68.20	10.88	Peak
5757.500	33.63	8.96	39.20	56.39	59.77	68.20	8.43	Peak

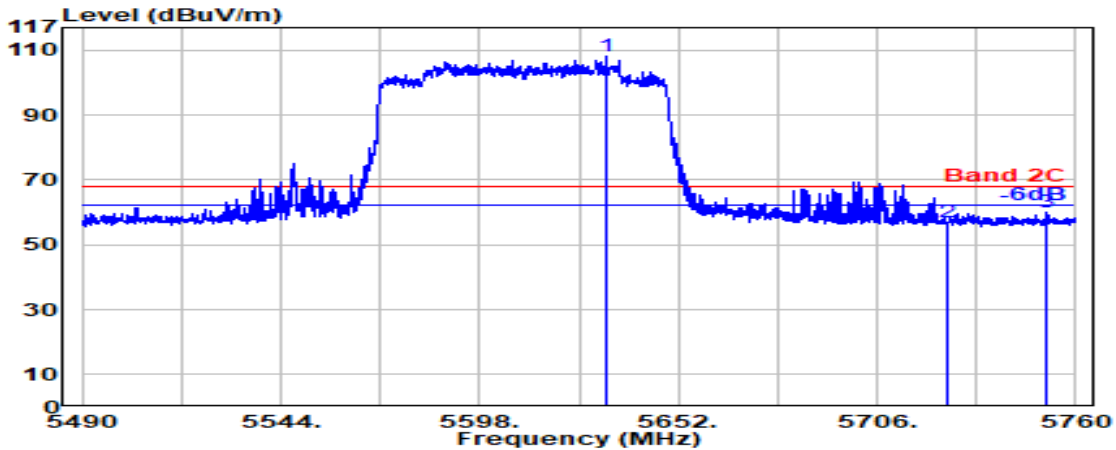

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5632.200	33.80	8.84	39.18	104.53	107.99	---	---	Peak
5725.000	33.60	8.93	39.20	53.76	57.09	68.20	11.11	Peak
5751.900	33.61	8.95	39.20	56.58	59.93	68.20	8.27	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

**A.2.2 Emissions outside the frequency band**

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.04	11.99	39.36	36.87	47.54	54.00	6.46	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.04	11.99	39.36	36.15	46.82	54.00	7.18	Peak

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	35.79	46.84	54.00	7.16	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	35.13	46.17	54.00	7.83	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	35.89	48.66	54.00	5.34	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	36.65	49.42	54.00	4.58	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	34.71	47.53	54.00	6.47	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	35.23	48.05	54.00	5.95	Peak

Mode	802.11a	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	38.99	35.04	47.91	54.00	6.09	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	38.99	37.47	50.35	54.00	3.65	Peak

Mode	802.11a	U-NII Band	4
		Frequency	TX 5865MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11730.000	39.00	13.50	39.12	34.26	47.64	54.00	6.36	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11730.000	39.00	13.50	39.12	34.69	48.06	54.00	5.94	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.22	34.52	45.46	54.00	8.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.22	35.70	46.64	54.00	7.36	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	36.16	47.21	54.00	6.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	35.72	46.77	54.00	7.23	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	34.94	47.71	54.00	6.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	36.08	48.84	54.00	5.16	Peak



Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	35.14	47.95	54.00	6.05	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	34.79	47.60	54.00	6.40	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	38.99	34.72	47.60	54.00	6.40	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	38.99	35.76	48.64	54.00	5.36	Peak

Mode	802.11n-HT20	U-NII Band	4
		Frequency	TX 5845MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.00	13.44	39.10	35.10	48.44	54.00	5.56	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.00	13.44	39.10	35.09	48.44	54.00	5.56	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.25	34.66	45.54	54.00	8.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.25	35.79	46.67	54.00	7.33	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	36.46	47.55	54.00	6.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	35.48	46.58	54.00	7.42	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	35.79	48.31	54.00	5.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	35.15	47.66	54.00	6.34	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	35.30	48.09	54.00	5.91	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	35.47	48.26	54.00	5.74	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.00	35.28	48.21	54.00	5.79	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.00	37.17	50.09	54.00	3.91	Peak

Mode	802.11n-HT40	U-NII Band	4
		Frequency	TX 5835MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.00	13.41	39.09	34.40	47.73	54.00	6.27	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11370.000	38.61	13.00	38.97	36.13	48.77	54.00	5.23	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.29	35.37	46.13	54.00	7.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.29	35.14	45.91	54.00	8.09	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	35.79	46.98	54.00	7.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	35.79	46.98	54.00	7.02	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	35.21	47.24	54.00	6.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	34.17	46.20	54.00	7.80	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	36.39	49.07	54.00	4.93	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	34.90	47.58	54.00	6.42	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.02	35.04	48.12	54.00	5.88	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.02	34.76	47.84	54.00	6.16	Peak

Mode	802.11ac-VHT80	U-NII Band	4
		Frequency	TX 5855MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11710.000	39.00	13.47	39.11	34.58	47.94	54.00	6.06	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11710.000	39.00	13.47	39.11	36.07	49.43	54.00	4.57	Peak

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	36.15	47.14	54.00	6.86	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	35.19	46.19	54.00	7.81	Peak

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	34.43	46.57	54.00	7.43	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	36.65	48.79	54.00	5.21	Peak

Mode	802.11ac-VHT160	U-NII Band	4
		Frequency	TX 5815MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11630.000	39.00	13.36	39.06	34.27	47.56	54.00	6.44	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11630.000	39.00	13.36	39.06	34.95	48.25	54.00	5.75	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.22	35.46	46.40	54.00	7.60	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.22	36.15	47.09	54.00	6.91	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	37.13	48.18	54.00	5.82	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	35.74	46.78	54.00	7.22	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	35.62	48.38	54.00	5.62	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	35.64	48.41	54.00	5.59	Peak



Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	35.62	48.44	54.00	5.56	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	35.50	48.32	54.00	5.68	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	38.99	35.63	48.51	54.00	5.49	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	38.99	34.85	47.73	54.00	6.27	Peak

Mode	802.11ax-HE20	U-NII Band	4
		Frequency	TX 5845MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.00	13.44	39.10	35.10	48.44	54.00	5.56	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.00	13.44	39.10	35.09	48.44	54.00	5.56	Peak



Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.25	35.93	46.81	54.00	7.19	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.25	34.88	45.76	54.00	8.24	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	36.22	47.31	54.00	6.69	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	35.98	47.08	54.00	6.92	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	35.29	47.80	54.00	6.20	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	35.26	47.77	54.00	6.23	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	35.06	47.85	54.00	6.15	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	35.80	48.59	54.00	5.41	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.00	34.53	47.46	54.00	6.54	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.00	35.36	48.29	54.00	5.71	Peak

Mode	802.11ax-HE40	U-NII Band	4
		Frequency	TX 5835MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.00	13.41	39.09	34.44	47.77	54.00	6.23	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.00	13.41	39.09	35.44	48.77	54.00	5.23	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.29	35.43	46.19	54.00	7.81	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.29	37.26	48.03	54.00	5.97	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	35.37	46.55	54.00	7.45	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	36.27	47.46	54.00	6.54	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	35.97	48.00	54.00	6.00	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	35.09	47.13	54.00	6.87	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	34.96	47.65	54.00	6.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	35.91	48.59	54.00	5.41	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.02	35.01	48.09	54.00	5.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.02	34.54	47.63	54.00	6.37	Peak

Mode	802.11ax-HE80	U-NII Band	4
		Frequency	TX 5855MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11710.000	39.00	13.47	39.11	34.08	47.44	54.00	6.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11710.000	39.00	13.47	39.11	37.07	50.43	54.00	3.57	Peak

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	34.82	45.82	54.00	8.18	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	35.68	46.68	54.00	7.32	Peak

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	33.67	45.81	54.00	8.19	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	34.20	46.34	54.00	7.66	Peak

Mode	802.11ax-HE160	U-NII Band	4
		Frequency	TX 5815MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11630.000	39.00	13.36	39.06	35.27	48.56	54.00	5.44	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11630.000	39.00	13.36	39.06	35.65	48.95	54.00	5.05	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.22	35.20	46.14	54.00	7.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.22	35.25	46.19	54.00	7.81	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	34.94	45.98	54.00	8.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	34.87	45.91	54.00	8.09	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	35.31	48.07	54.00	5.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	35.46	48.22	54.00	5.78	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	36.36	49.17	54.00	4.83	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	35.82	48.63	54.00	5.37	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	38.99	35.09	47.96	54.00	6.04	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	38.99	35.56	48.44	54.00	5.56	Peak

Mode	802.11be-EHT20	U-NII Band	4
		Frequency	TX 5845MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.00	13.44	39.10	35.10	48.44	54.00	5.56	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11690.000	39.00	13.44	39.10	35.39	48.74	54.00	5.26	Peak



Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.25	34.69	45.57	54.00	8.43	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.25	36.65	47.54	54.00	6.46	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	35.78	46.87	54.00	7.13	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	35.84	46.94	54.00	7.06	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	35.12	47.63	54.00	6.37	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	35.42	47.93	54.00	6.07	Peak



Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	34.35	47.14	54.00	6.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	35.10	47.89	54.00	6.11	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.00	35.66	48.58	54.00	5.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.00	35.02	47.95	54.00	6.05	Peak

Mode	802.11be-EHT40	U-NII Band	4
		Frequency	TX 5835MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.00	13.41	39.09	33.90	47.23	54.00	6.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.00	13.41	39.09	34.24	47.57	54.00	6.43	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.29	35.64	46.40	54.00	7.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.29	36.71	47.48	54.00	6.52	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	35.91	47.10	54.00	6.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	37.13	48.32	54.00	5.68	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	35.28	47.32	54.00	6.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	35.62	47.65	54.00	6.35	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	34.90	47.58	54.00	6.42	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	35.85	48.53	54.00	5.47	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.02	33.91	46.99	54.00	7.01	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.02	35.53	48.62	54.00	5.38	Peak

Mode	802.11be-EHT80	U-NII Band	4
		Frequency	TX 5855MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.00	13.41	39.09	35.00	48.33	54.00	5.67	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11670.000	39.00	13.41	39.09	35.64	48.97	54.00	5.03	Peak

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	34.96	45.96	54.00	8.04	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	36.14	47.14	54.00	6.86	Peak

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	35.93	48.07	54.00	5.93	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	35.51	47.65	54.00	6.35	Peak

Mode	802.11be-EHT160	U-NII Band	4
		Frequency	TX 5815MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11630.000	39.00	13.36	39.06	35.07	48.36	54.00	5.64	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11630.000	39.00	13.36	39.06	35.35	48.65	54.00	5.35	Peak

### A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.