

---


---

## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>4</b>
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	100
A.2.3 Emissions in Non-restricted Frequency Bands:.....	103
<b>A.3 DTS/OCCUPIED BANDWIDTH</b> .....	<b>104</b>
A.3.1 DTS/Occupied Bandwidth Result.....	104
A.3.2 Measurement Plots .....	106
<b>A.4 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>126</b>
A.4.1 Peak Output Power .....	126
A.4.2 Average Output Power (Reporting only).....	130
<b>A.5 EMISSION LIMITATIONS</b> .....	<b>133</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>161</b>
A.6.1 Power Spectral Density Result .....	161
A.6.2 Measurement Plots .....	164

## A.1 CONDUCTED EMISSION

Test Date	2024/08/27	Temp./Hum.	25°C/56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

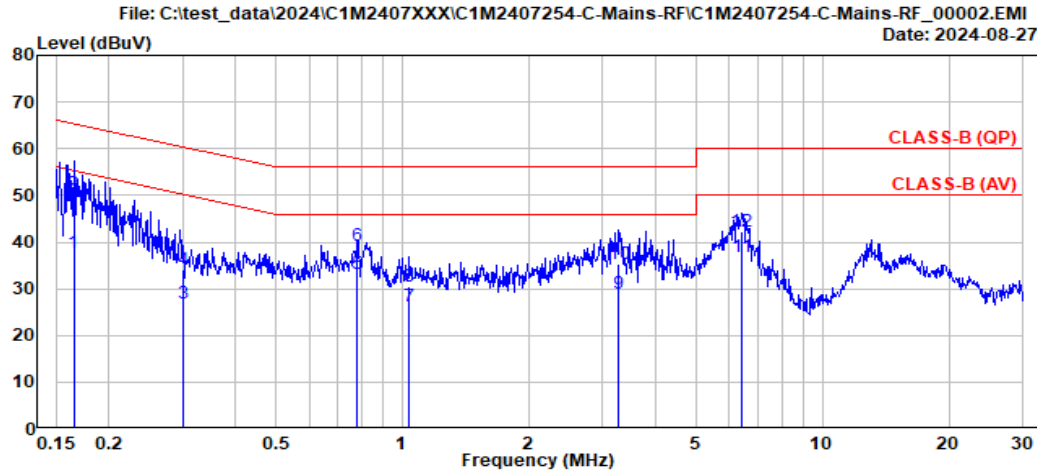

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/56%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90TS	Engineer	: Roy Hung
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.165	10.27	0.03	9.85	17.73	37.88	55.21	17.33	Average
2	0.165	10.27	0.03	9.85	30.34	50.49	65.21	14.72	QP
3	0.301	10.26	0.03	9.85	6.67	26.81	50.20	23.39	Average
4	0.301	10.26	0.03	9.85	13.98	34.12	60.20	26.08	QP
5	0.781	10.27	0.04	9.85	12.98	33.14	46.00	12.86	Average
6	0.781	10.27	0.04	9.85	19.03	39.19	56.00	16.81	QP
7	1.037	10.27	0.04	9.85	6.00	26.16	46.00	19.84	Average
8	1.037	10.27	0.04	9.85	10.42	30.58	56.00	25.42	QP
9	3.281	10.33	0.07	9.86	8.82	29.08	46.00	16.92	Average
10	3.281	10.33	0.07	9.86	15.10	35.36	56.00	20.64	QP
11	6.398	10.45	0.10	9.87	16.32	36.74	50.00	13.26	Average
12	6.398	10.45	0.10	9.87	21.78	42.20	60.00	17.80	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

**Audix Technology Corp.**  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

Test Date	2024/08/27	Temp./Hum.	25°C/56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

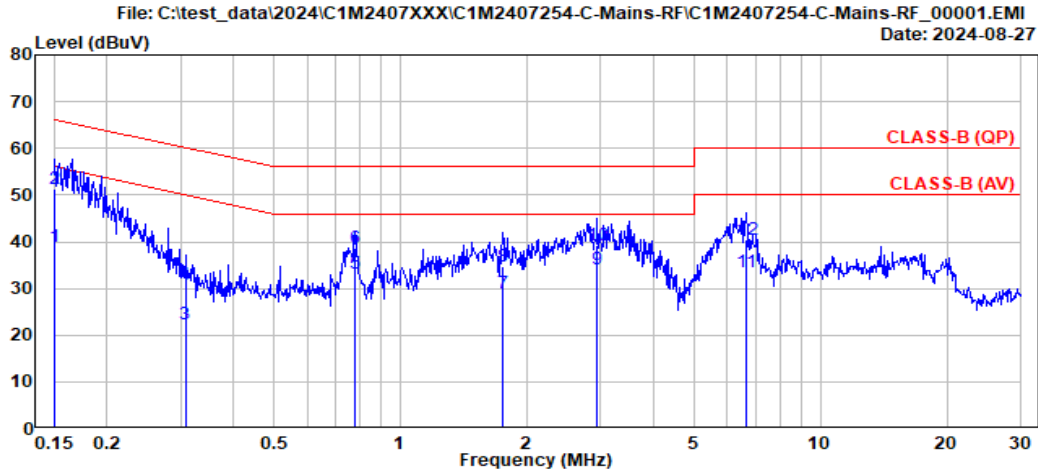

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/56%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90TS	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.151	10.26	0.03	9.85	18.92	39.06	55.96	16.90	Average
2	0.151	10.26	0.03	9.85	31.30	51.44	65.96	14.52	QP
3	0.307	10.25	0.03	9.85	2.15	22.28	50.04	27.76	Average
4	0.307	10.25	0.03	9.85	10.64	30.77	60.04	29.27	QP
5	0.777	10.26	0.04	9.85	13.16	33.31	46.00	12.69	Average
6	0.777	10.26	0.04	9.85	18.51	38.66	56.00	17.34	QP
7	1.751	10.27	0.06	9.86	8.72	28.91	46.00	17.09	Average
8	1.751	10.27	0.06	9.86	14.51	34.70	56.00	21.30	QP
9	2.940	10.29	0.07	9.86	13.85	34.07	46.00	11.93	Average
10	2.940	10.29	0.07	9.86	18.98	39.20	56.00	16.80	QP
11	6.659	10.38	0.11	9.87	13.17	33.53	50.00	16.47	Average
12	6.659	10.38	0.11	9.87	20.03	40.39	60.00	19.61	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

## A.2 RADIATED EMISSION

Test Date	2024/08/06 ~ 26	Temp./Hum.	23 ~ 24°C/52 ~ 55%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.500	23.80	1.37	26.51	27.03	25.69	40.00	14.31	Peak
101.500	16.51	2.51	26.31	32.26	24.97	43.50	18.53	Peak
216.000	15.93	3.71	25.80	31.86	25.70	43.50	17.80	Peak
432.000	21.69	6.08	26.77	31.68	32.69	46.00	13.31	Peak
643.500	24.27	7.04	27.48	27.29	31.12	46.00	14.88	Peak
866.500	25.78	8.23	27.21	27.86	34.67	46.00	11.33	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.500	23.80	1.37	26.51	27.14	25.80	40.00	14.20	Peak
91.000	14.91	2.38	26.34	32.85	23.80	43.50	19.70	Peak
125.500	17.68	2.81	26.16	31.60	25.93	43.50	17.57	Peak
216.000	15.93	3.71	25.80	30.81	24.65	43.50	18.85	Peak
432.000	21.69	6.08	26.77	31.72	32.72	46.00	13.28	Peak
881.000	25.94	8.32	27.18	28.17	35.25	46.00	10.75	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.44	26.50	39.98	36.78	40.00	3.22	Peak
133.000	17.34	2.89	26.12	32.43	26.54	43.50	16.96	Peak
216.000	15.93	3.71	25.80	33.42	27.26	43.50	16.24	Peak
289.000	18.45	4.40	25.67	29.27	26.46	46.00	19.54	Peak
432.000	21.69	6.08	26.77	31.58	32.58	46.00	13.42	Peak
932.000	26.41	8.63	27.04	27.92	35.92	46.00	10.08	Peak


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
40.000	18.98	1.54	26.50	42.89	36.91	40.00	3.09	Peak
131.500	17.41	2.87	26.13	36.89	31.05	43.50	12.45	Peak
150.500	16.26	3.07	26.03	37.31	30.61	43.50	12.89	Peak
432.000	21.69	6.08	26.77	31.49	32.50	46.00	13.50	Peak
634.500	24.23	6.99	27.48	28.63	32.37	46.00	13.63	Peak
797.500	25.02	7.79	27.33	28.43	33.90	46.00	12.10	Peak

A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


**Band Edge:**

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

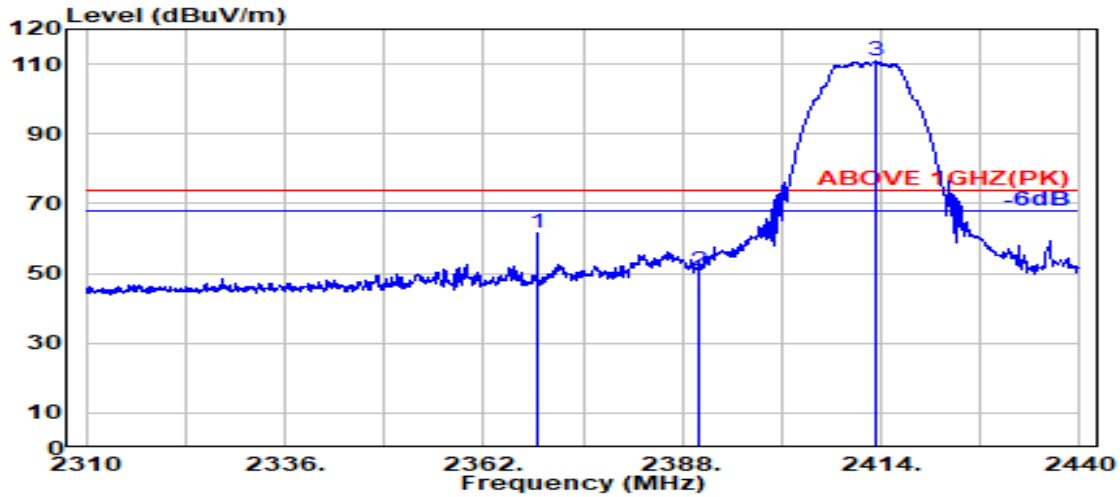

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2369.000	28.22	5.70	39.93	67.68	61.67	74.00	12.33	Peak
2390.000	28.14	5.72	39.93	56.67	50.61	74.00	23.39	Peak
@ 2413.300	28.15	5.75	39.93	116.85	110.83	---	---	Peak

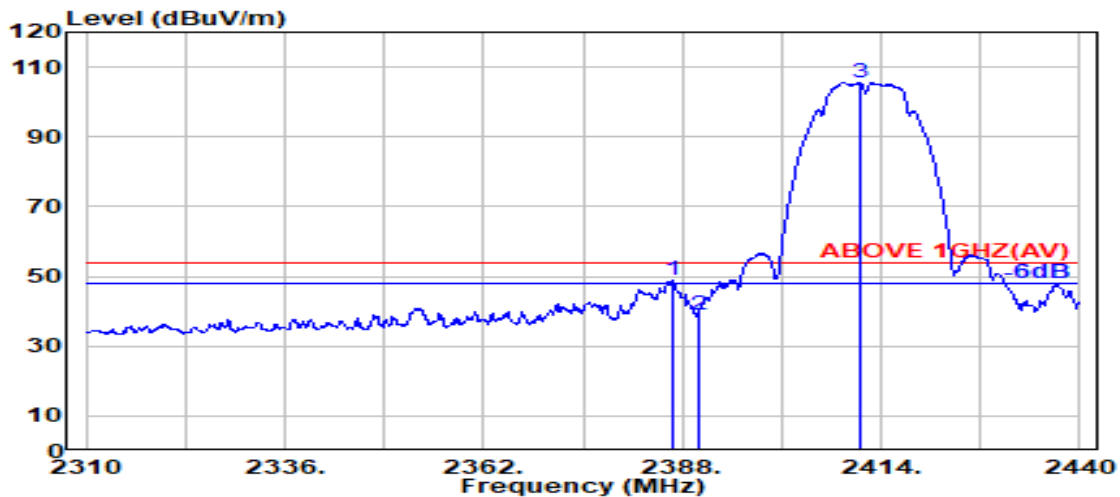


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.15	5.72	39.93	54.89	48.83	54.00	5.17	Average
2390.000	28.14	5.72	39.93	45.08	39.02	54.00	14.98	Average
@ 2411.200	28.15	5.75	39.93	111.74	105.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

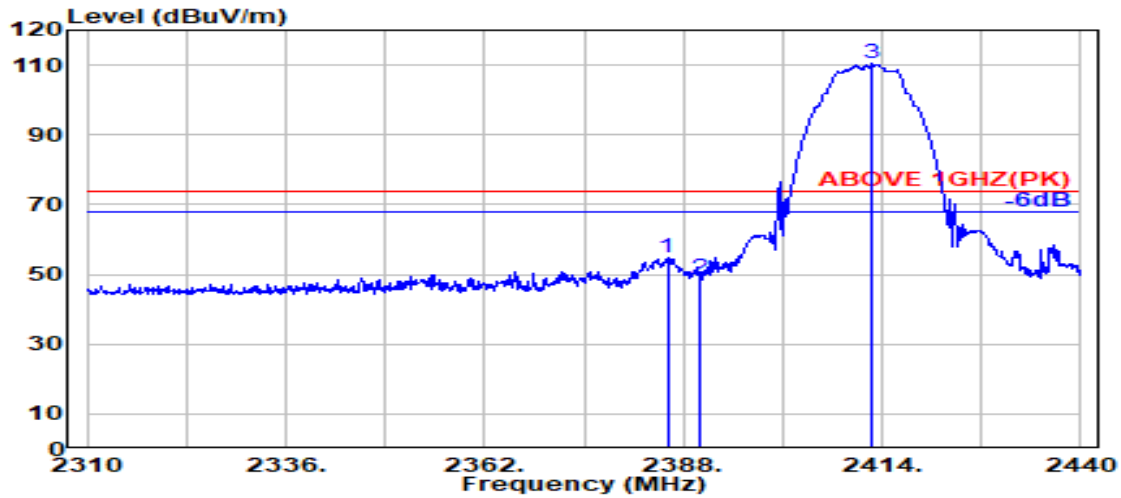

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.900	28.16	5.72	39.93	60.77	54.72	74.00	19.28	Peak
2390.000	28.14	5.72	39.93	55.15	49.09	74.00	24.91	Peak
@ 2412.600	28.15	5.75	39.93	116.58	110.56	---	---	Peak

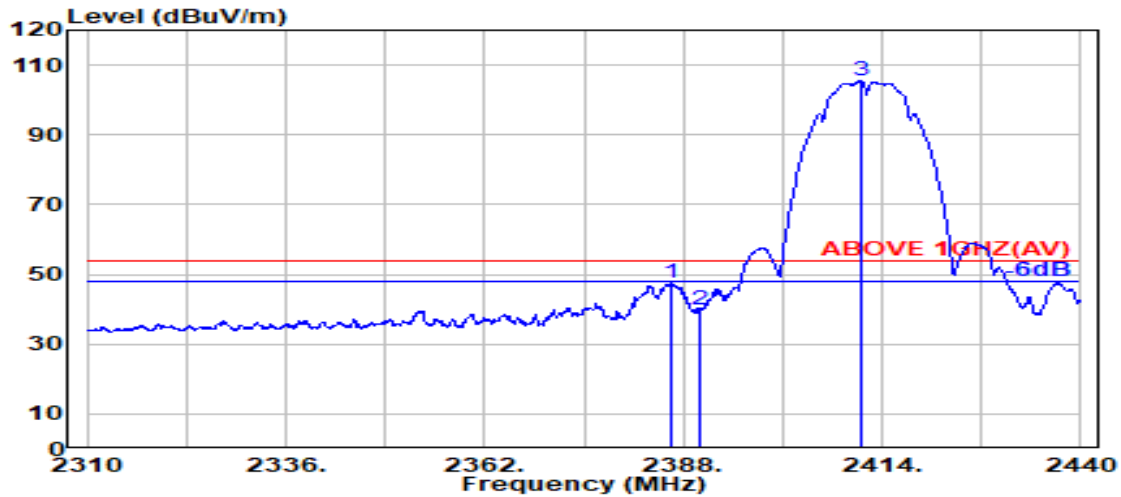


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.400	28.15	5.72	39.93	53.81	47.75	54.00	6.25	Average
2390.000	28.14	5.72	39.93	45.74	39.67	54.00	14.33	Average
@ 2411.300	28.15	5.75	39.93	111.57	105.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

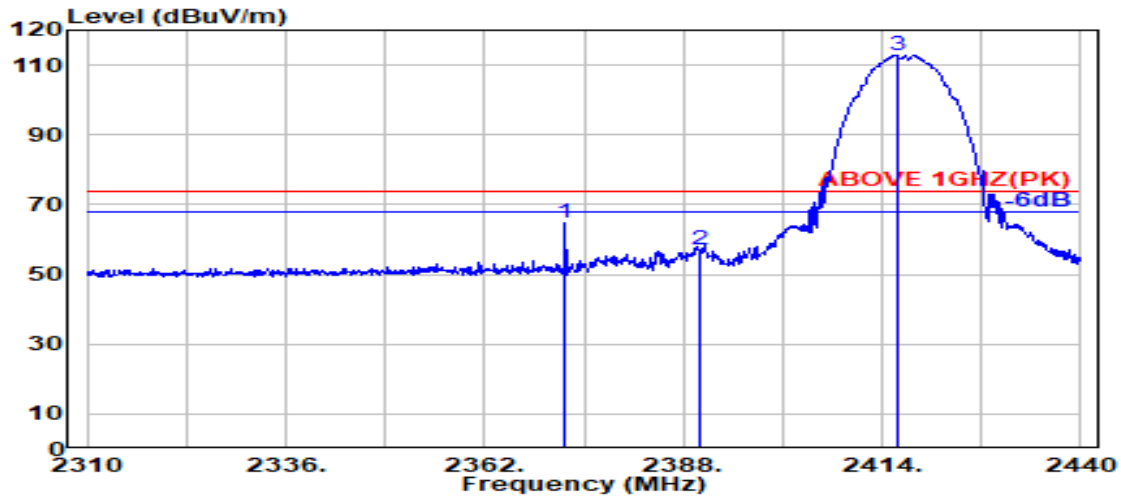

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.600	28.21	5.70	39.93	70.96	64.94	74.00	9.06	Peak
2390.000	28.14	5.72	39.93	63.08	57.01	74.00	16.99	Peak
@ 2415.900	28.16	5.75	39.93	118.79	112.78	---	---	Peak

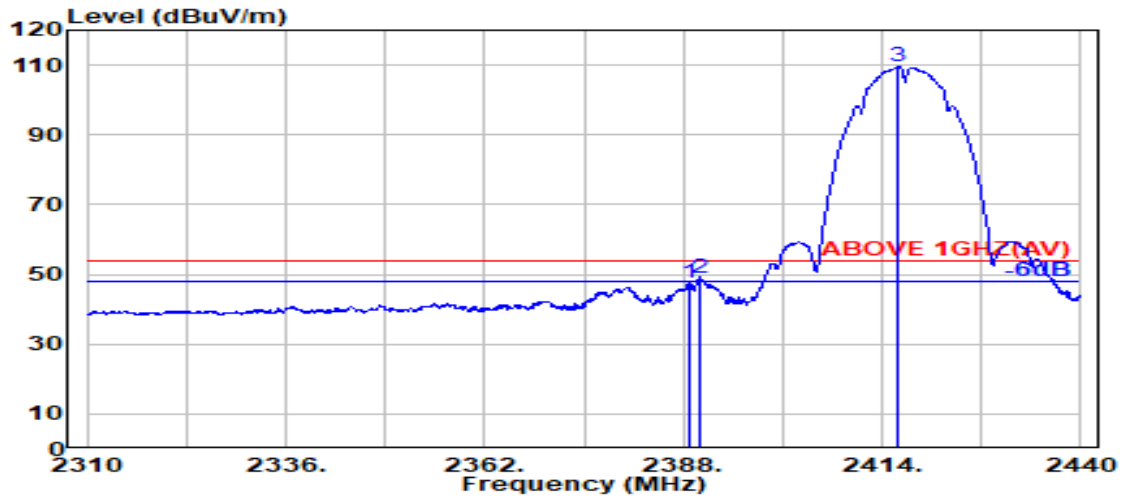


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.93	53.75	47.68	54.00	6.32	Average
2390.000	28.14	5.72	39.93	54.75	48.68	54.00	5.32	Average
@ 2416.200	28.17	5.75	39.93	115.66	109.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

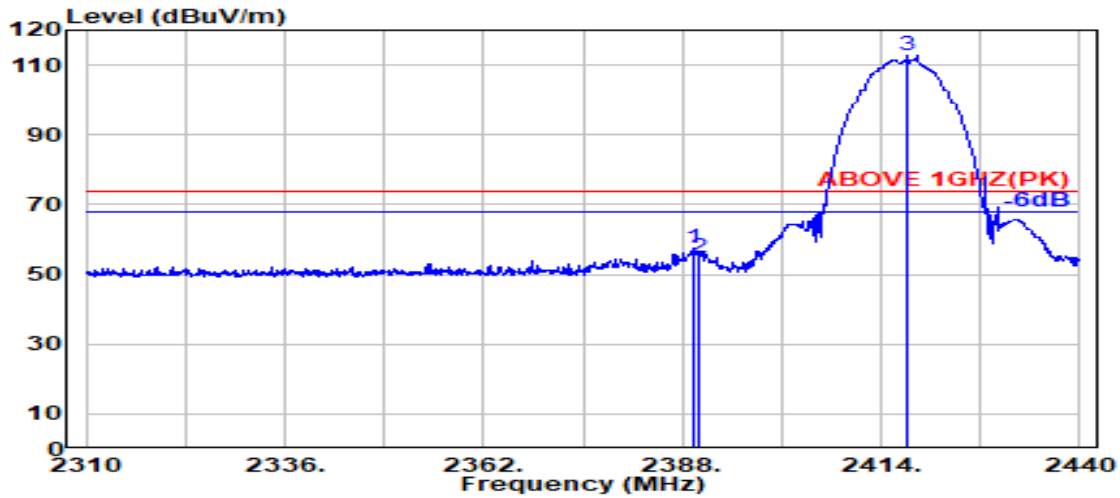

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.93	63.37	57.30	74.00	16.70	Peak
2390.000	28.14	5.72	39.93	60.90	54.84	74.00	19.16	Peak
@ 2417.500	28.17	5.75	39.93	118.77	112.77	---	---	Peak

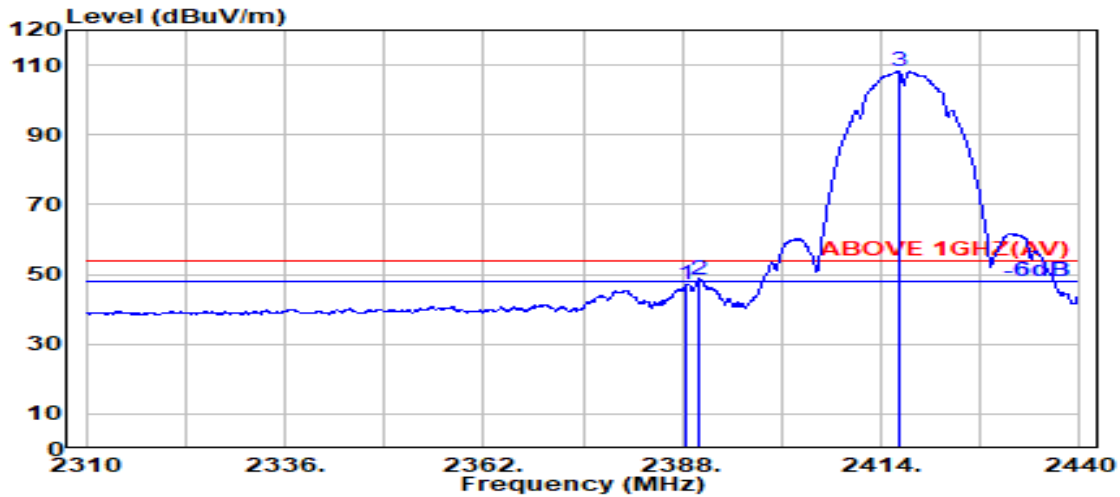


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.15	5.72	39.93	53.37	47.31	54.00	6.69	Average
2390.000	28.14	5.72	39.93	54.52	48.45	54.00	5.55	Average
@ 2416.300	28.17	5.75	39.93	114.31	108.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

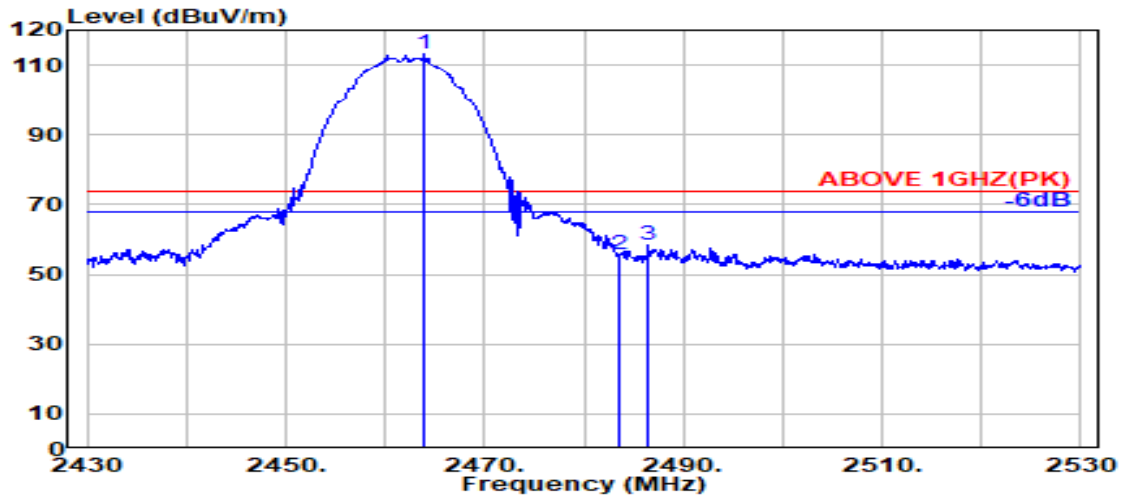

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.33	5.81	39.92	118.98	113.19	---	---	Peak
2483.500	28.37	5.83	39.92	61.23	55.51	74.00	18.49	Peak
2486.400	28.37	5.83	39.92	64.09	58.38	74.00	15.62	Peak

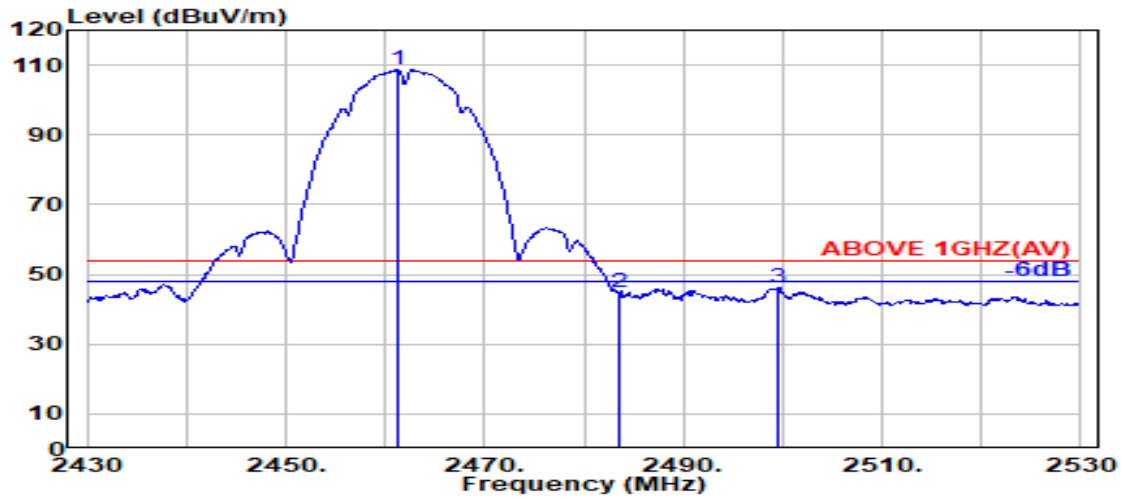


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.32	5.81	39.92	114.60	108.81	---	---	Average
2483.500	28.37	5.83	39.92	50.57	44.85	54.00	9.15	Average
2499.600	28.40	5.85	39.92	51.65	45.98	54.00	8.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

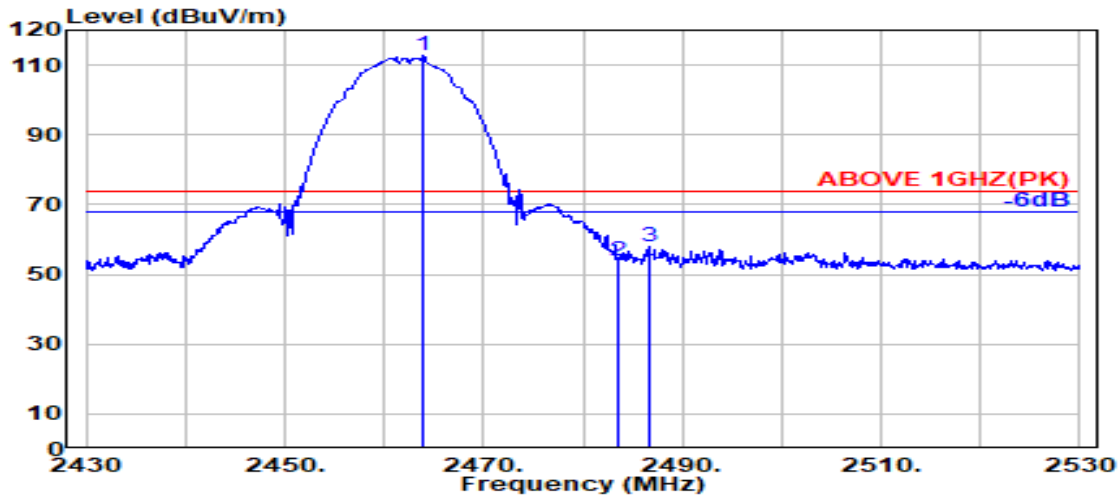

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.33	5.81	39.92	118.60	112.81	---	---	Peak
2483.500	28.37	5.83	39.92	59.72	54.00	74.00	20.00	Peak
2486.700	28.37	5.83	39.92	63.48	57.77	74.00	16.23	Peak

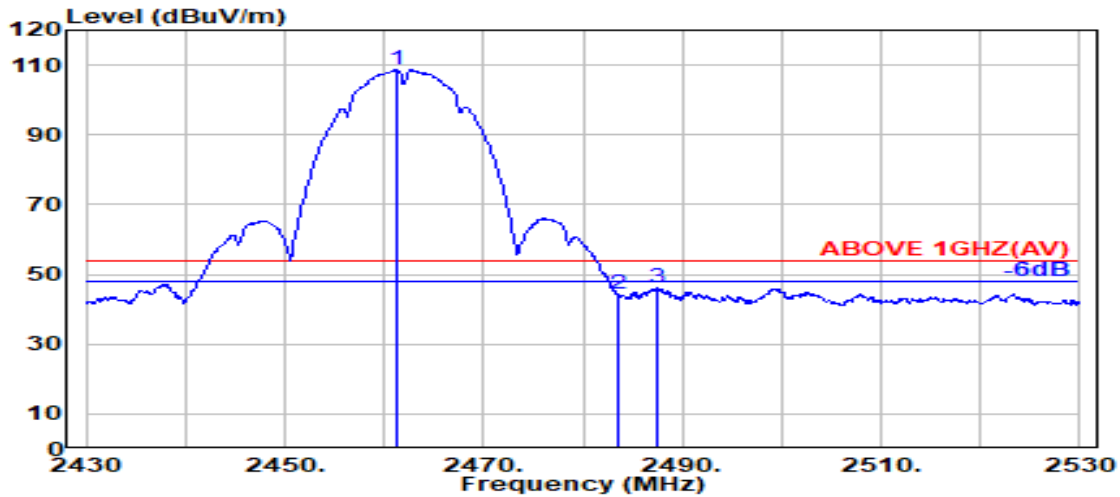


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.32	5.81	39.92	114.45	108.65	---	---	Average
2483.500	28.37	5.83	39.92	50.10	44.37	54.00	9.63	Average
2487.500	28.38	5.84	39.92	51.85	46.14	54.00	7.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

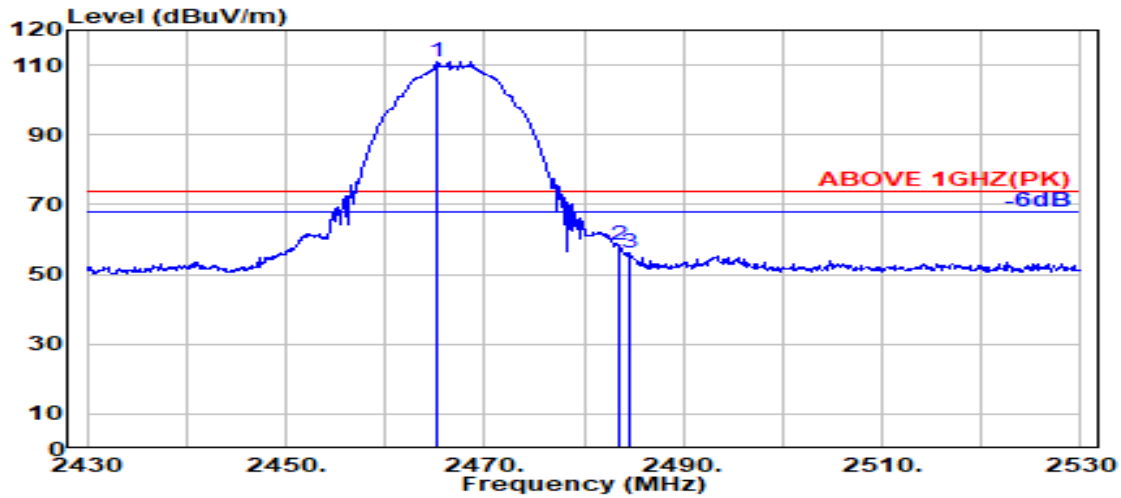

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.33	5.81	39.92	116.89	111.10	---	---	Peak
2483.500	28.37	5.83	39.92	64.05	58.33	74.00	15.67	Peak
2484.500	28.37	5.83	39.92	62.09	56.37	74.00	17.63	Peak

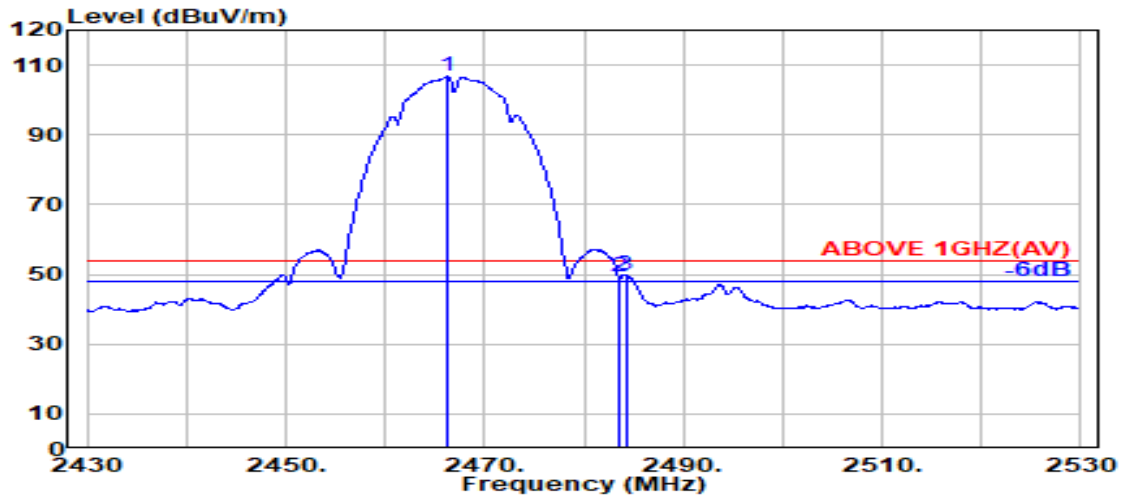


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.33	5.81	39.92	112.43	106.65	---	---	Average
2483.500	28.37	5.83	39.92	55.20	49.48	54.00	4.52	Average
2484.200	28.37	5.83	39.92	55.70	49.97	54.00	4.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

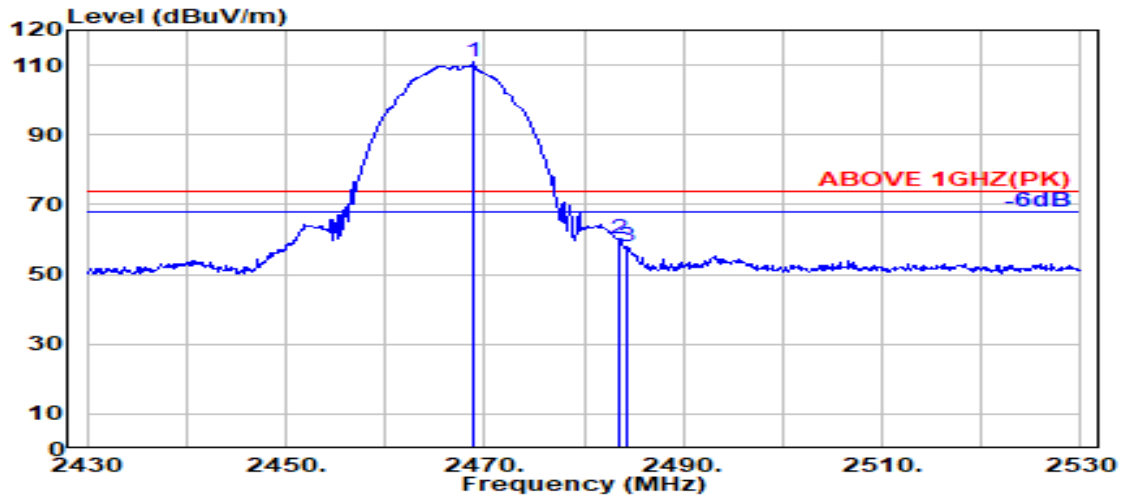

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.800	28.34	5.81	39.92	116.91	111.14	---	---	Peak
	2483.500	28.37	5.83	39.92	65.85	60.13	74.00	13.87	Peak
	2484.400	28.37	5.83	39.92	63.46	57.74	74.00	16.26	Peak

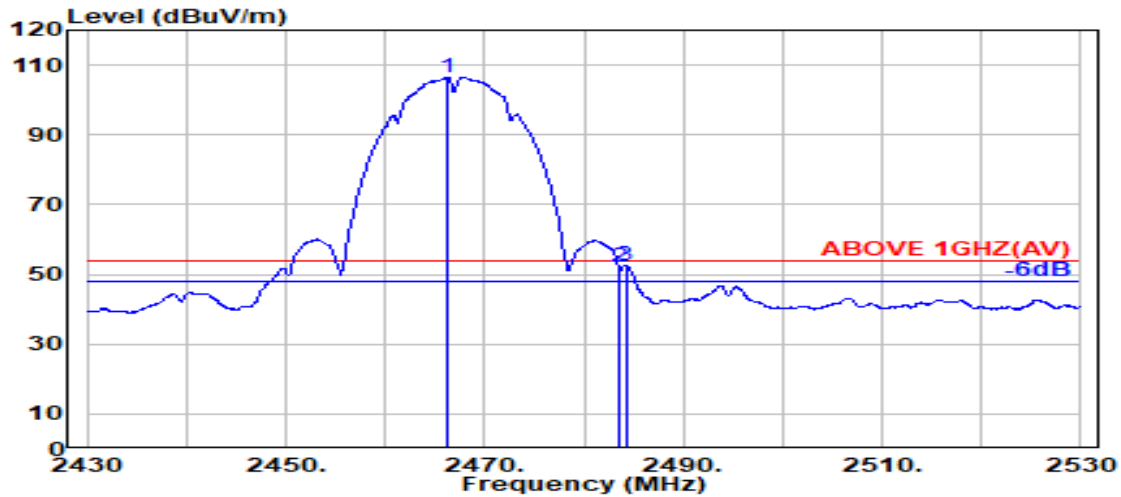


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.300	28.33	5.81	39.92	112.41	106.63	---	---	Average
	2483.500	28.37	5.83	39.92	57.88	52.16	54.00	1.84	Average
	2484.200	28.37	5.83	39.92	58.37	52.65	54.00	1.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

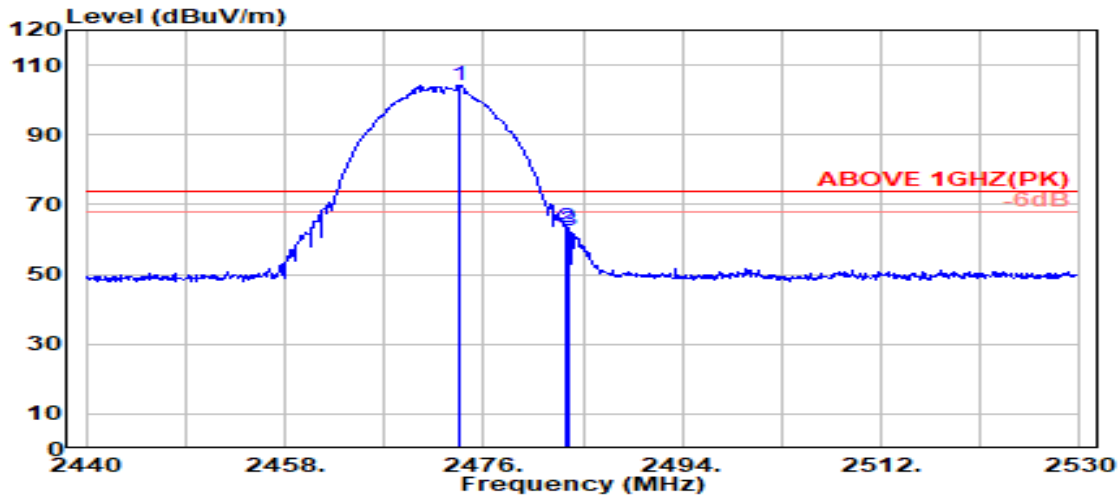

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.840	28.35	5.82	39.92	109.94	104.19	---	---	Peak
2483.500	28.37	5.83	39.92	69.03	63.30	74.00	10.70	Peak
2483.740	28.37	5.83	39.92	68.27	62.55	74.00	11.45	Peak

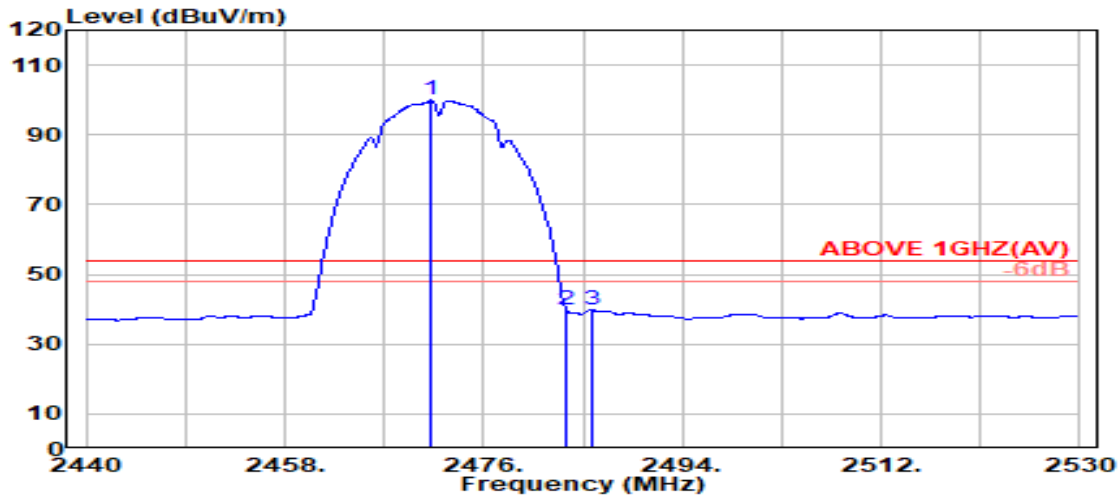


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.230	28.34	5.82	39.92	105.71	99.95	---	---	Average
2483.500	28.37	5.83	39.92	45.69	39.97	54.00	14.03	Average
2485.810	28.37	5.83	39.92	45.54	39.82	54.00	14.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

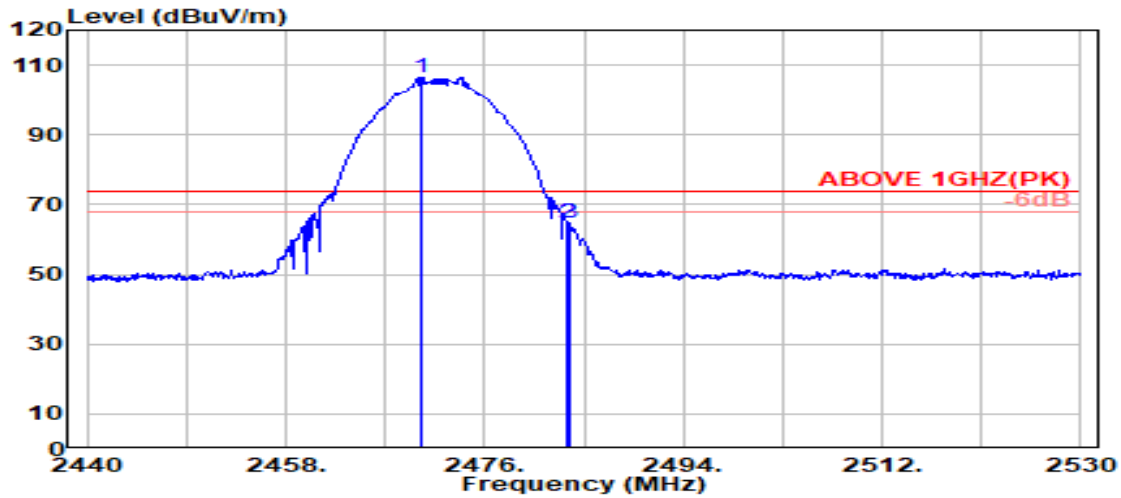

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.240	28.34	5.82	39.92	112.23	106.47	---	---	Peak
2483.500	28.37	5.83	39.92	70.38	64.65	74.00	9.35	Peak
2483.740	28.37	5.83	39.92	70.43	64.71	74.00	9.29	Peak

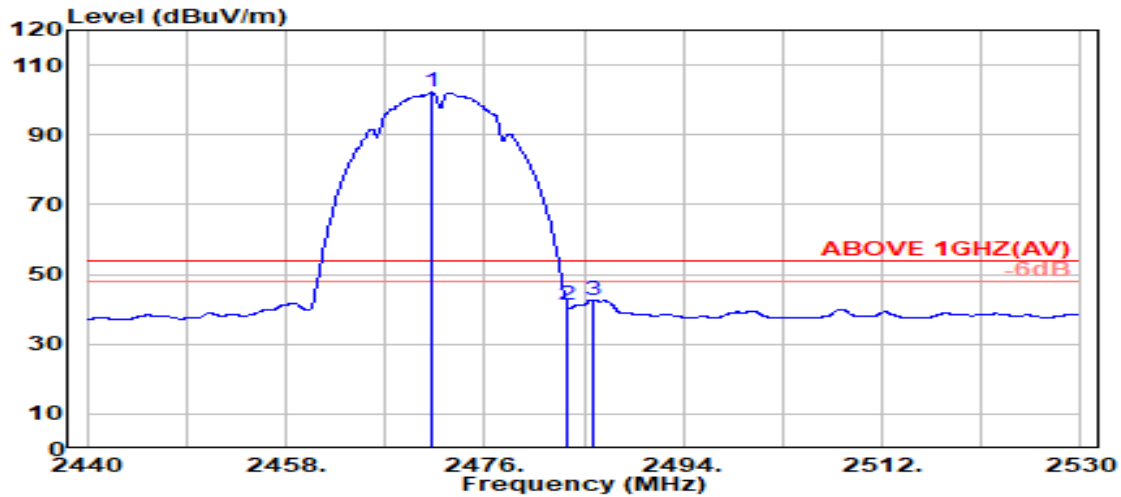


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.140	28.34	5.82	39.92	107.96	102.20	---	---	Average
2483.500	28.37	5.83	39.92	47.05	41.33	54.00	12.67	Average
2485.810	28.37	5.83	39.92	48.49	42.78	54.00	11.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

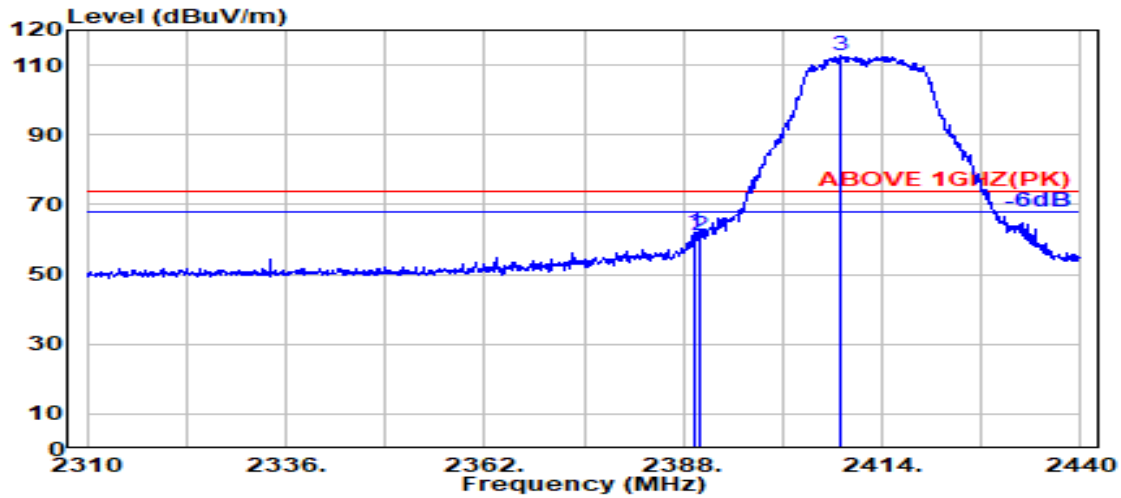

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.93	68.12	62.05	74.00	11.95	Peak
2390.000	28.14	5.72	39.93	67.19	61.13	74.00	12.87	Peak
@ 2408.600	28.13	5.74	39.93	118.61	112.56	---	---	Peak

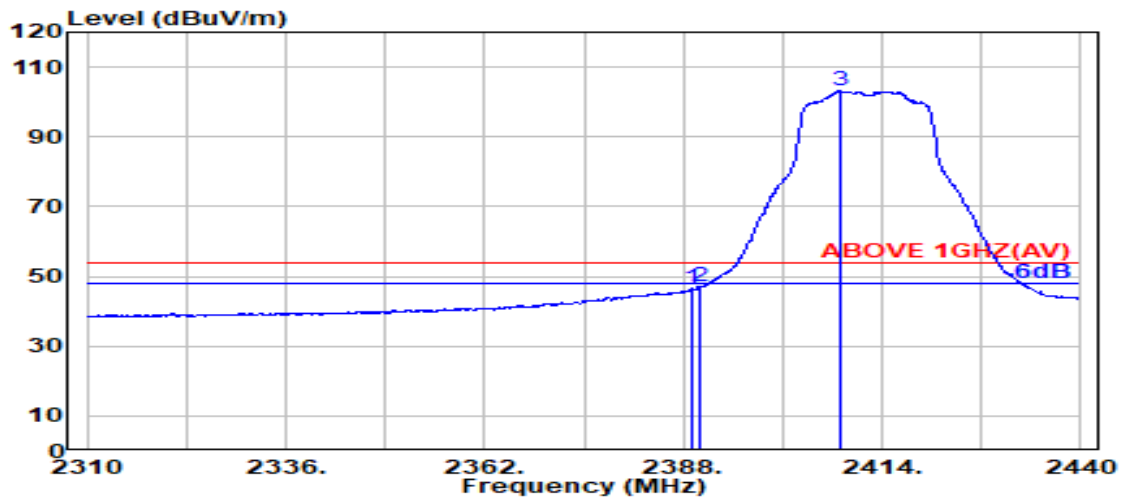


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.93	52.62	46.56	54.00	7.44	Average
2390.000	28.14	5.72	39.93	52.97	46.90	54.00	7.10	Average
@ 2408.600	28.13	5.74	39.93	109.16	103.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

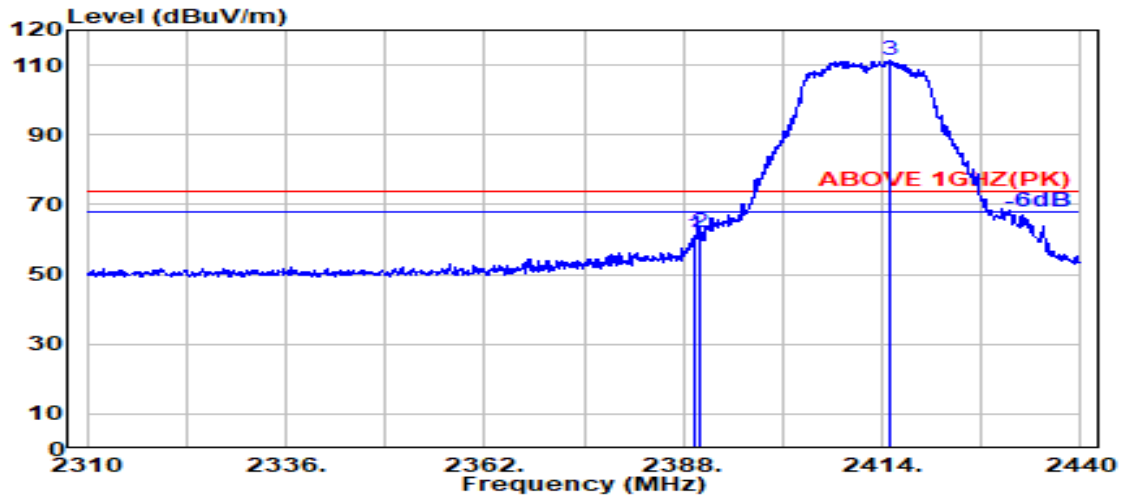

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.93	67.05	60.98	74.00	13.02	Peak
2390.000	28.14	5.72	39.93	68.05	61.98	74.00	12.02	Peak
@ 2414.900	28.16	5.75	39.93	117.22	111.20	---	---	Peak

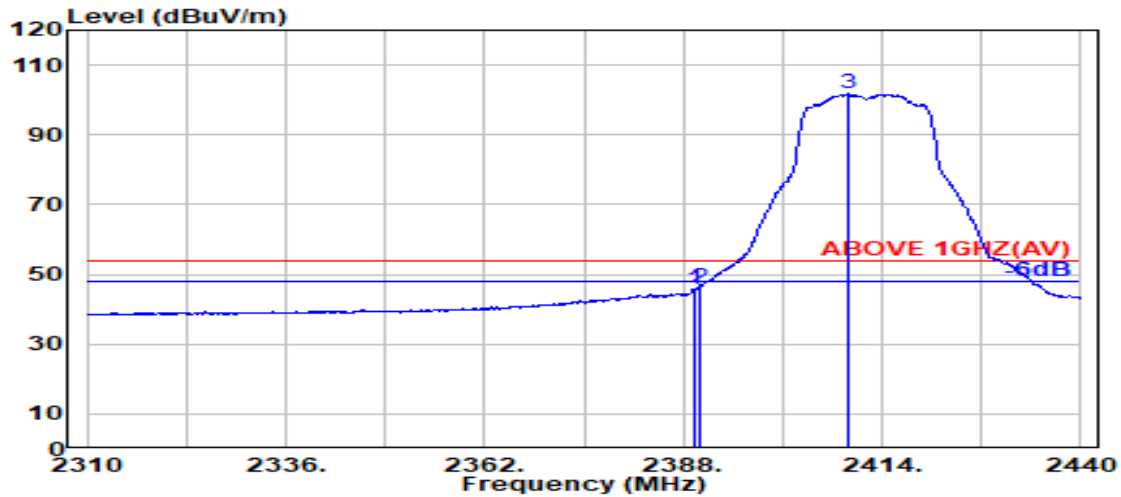


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	51.87	45.80	54.00	8.20	Average
2390.000	28.14	5.72	39.93	52.19	46.13	54.00	7.87	Average
@ 2409.700	28.14	5.74	39.93	107.72	101.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

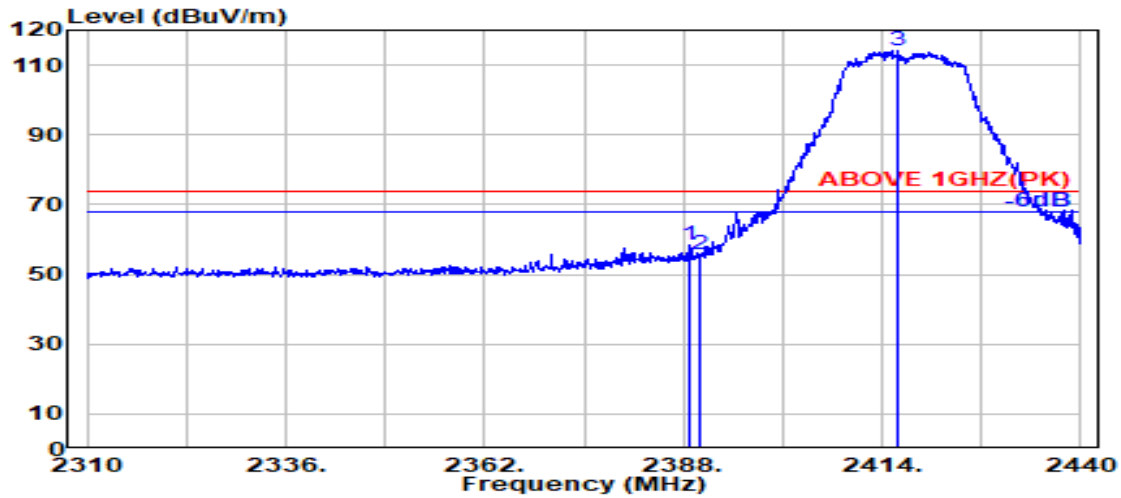

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.93	64.49	58.43	74.00	15.57	Peak
2390.000	28.14	5.72	39.93	61.83	55.76	74.00	18.24	Peak
@ 2416.000	28.16	5.75	39.93	120.13	114.13	---	---	Peak

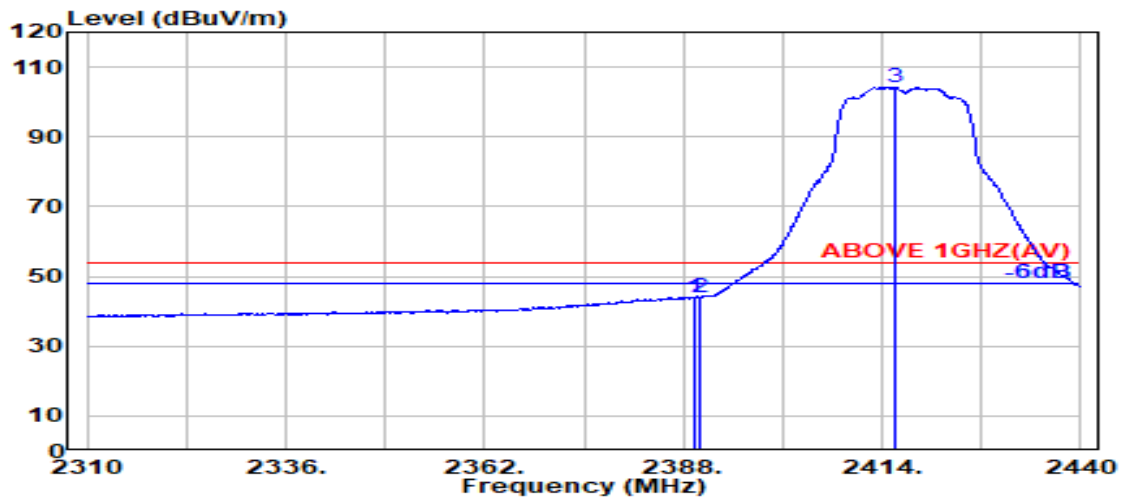


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.93	50.05	43.98	54.00	10.02	Average
2390.000	28.14	5.72	39.93	50.01	43.94	54.00	10.06	Average
@ 2415.800	28.16	5.75	39.93	110.13	104.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

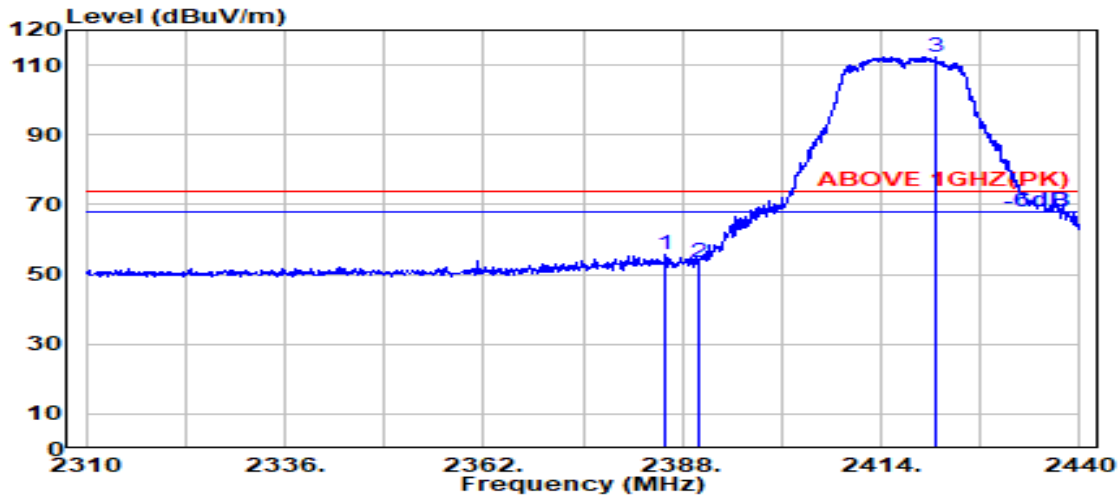

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.800	28.16	5.72	39.93	61.77	55.71	74.00	18.29	Peak
2390.000	28.14	5.72	39.93	59.72	53.66	74.00	20.34	Peak
@ 2421.200	28.19	5.76	39.93	118.47	112.48	---	---	Peak

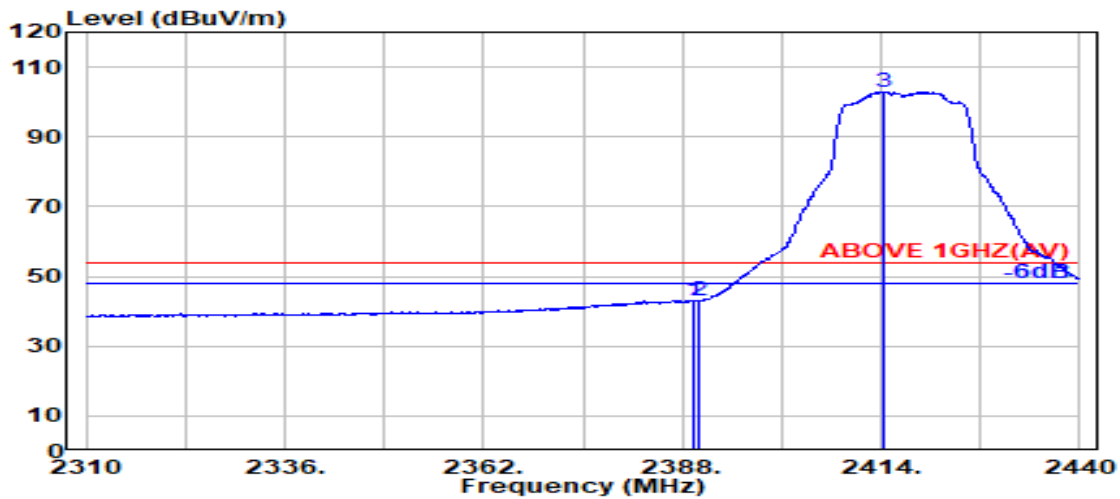


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	49.12	43.05	54.00	10.95	Average
2390.000	28.14	5.72	39.93	48.89	42.83	54.00	11.17	Average
@ 2414.300	28.16	5.75	39.93	108.83	102.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

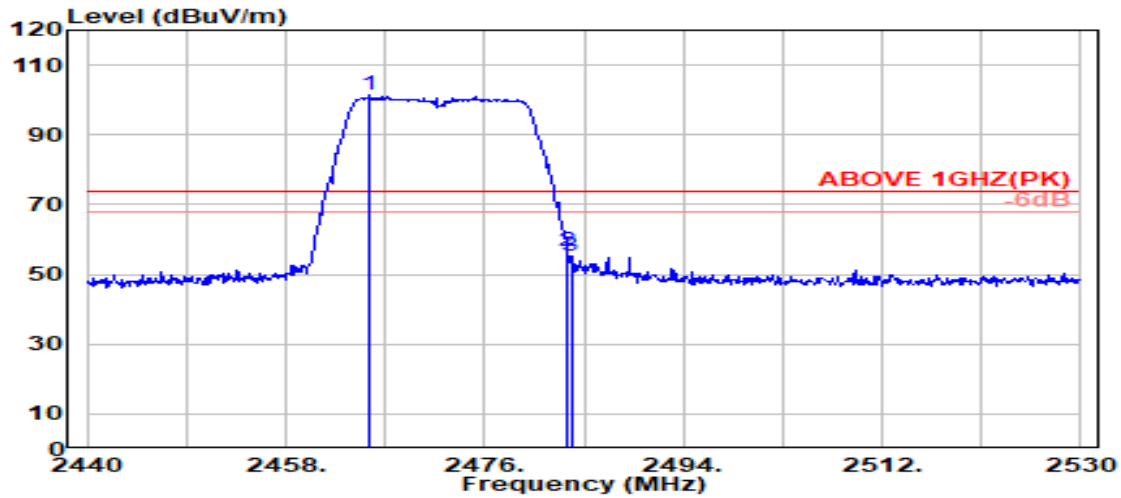

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.650	28.33	5.81	39.92	107.42	101.64	---	---	Peak
2483.500	28.37	5.83	39.92	62.43	56.71	74.00	17.29	Peak
2483.830	28.37	5.83	39.92	60.81	55.09	74.00	18.91	Peak

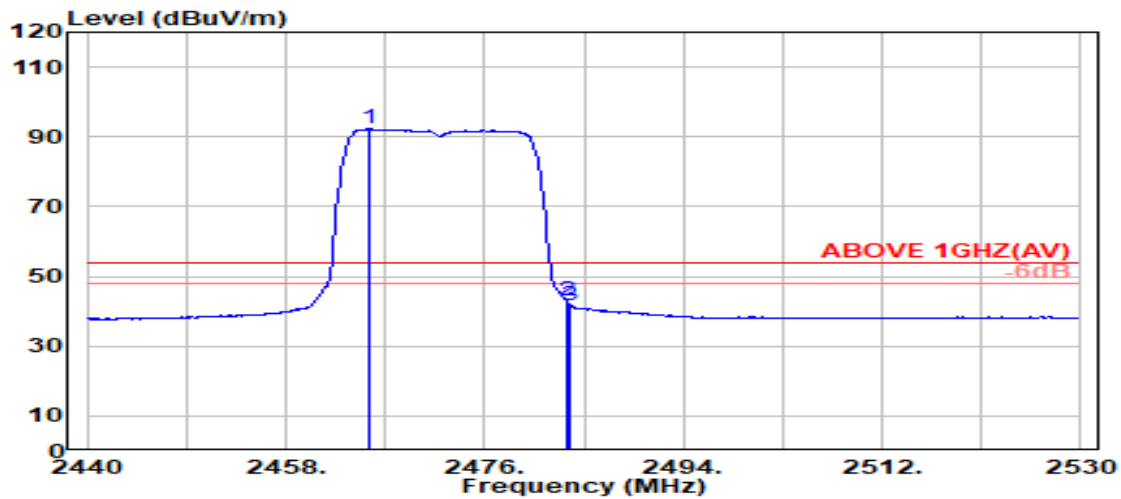


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.560	28.33	5.81	39.92	98.01	92.23	---	---	Average
2483.500	28.37	5.83	39.92	48.52	42.80	54.00	11.20	Average
2483.740	28.37	5.83	39.92	47.57	41.85	54.00	12.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

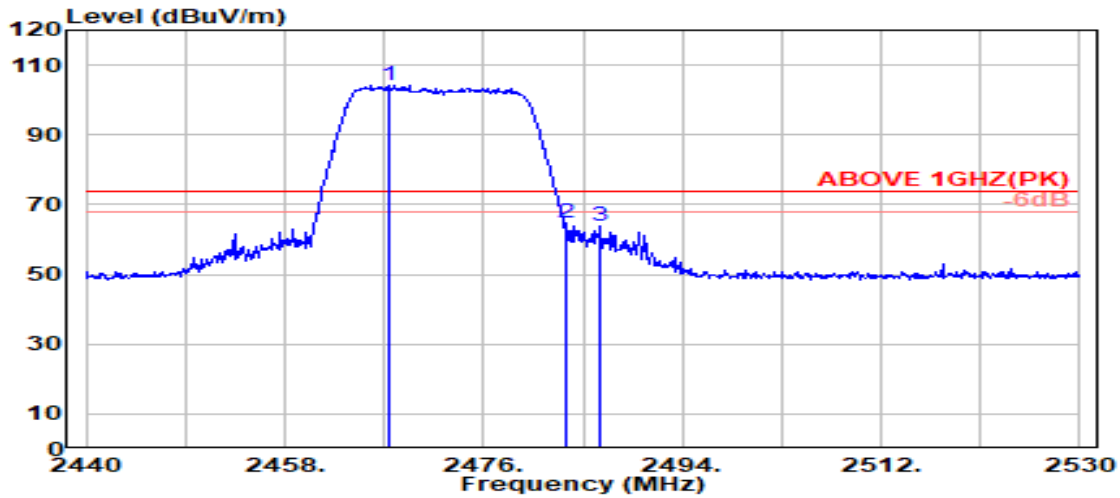

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.360	28.33	5.81	39.92	109.84	104.07	---	---	Peak
2483.500	28.37	5.83	39.92	70.50	64.78	74.00	9.22	Peak
2486.620	28.37	5.83	39.92	69.52	63.80	74.00	10.20	Peak

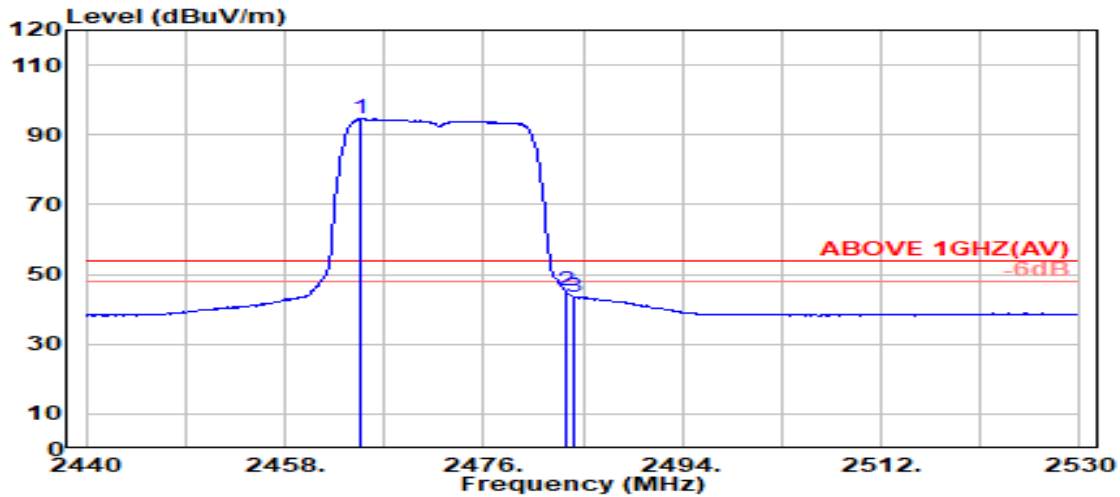


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.840	28.33	5.81	39.92	100.44	94.66	---	---	Average
2483.500	28.37	5.83	39.92	50.87	45.14	54.00	8.86	Average
2484.190	28.37	5.83	39.92	49.27	43.55	54.00	10.45	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

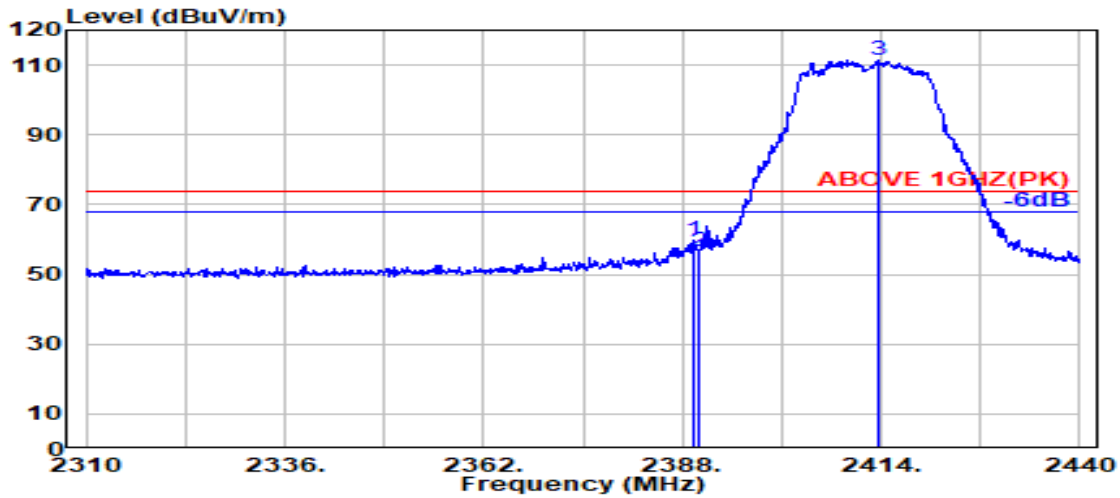

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	65.99	59.92	74.00	14.08	Peak
2390.000	28.14	5.72	39.93	62.57	56.50	74.00	17.50	Peak
@ 2413.500	28.15	5.75	39.93	117.26	111.24	---	---	Peak

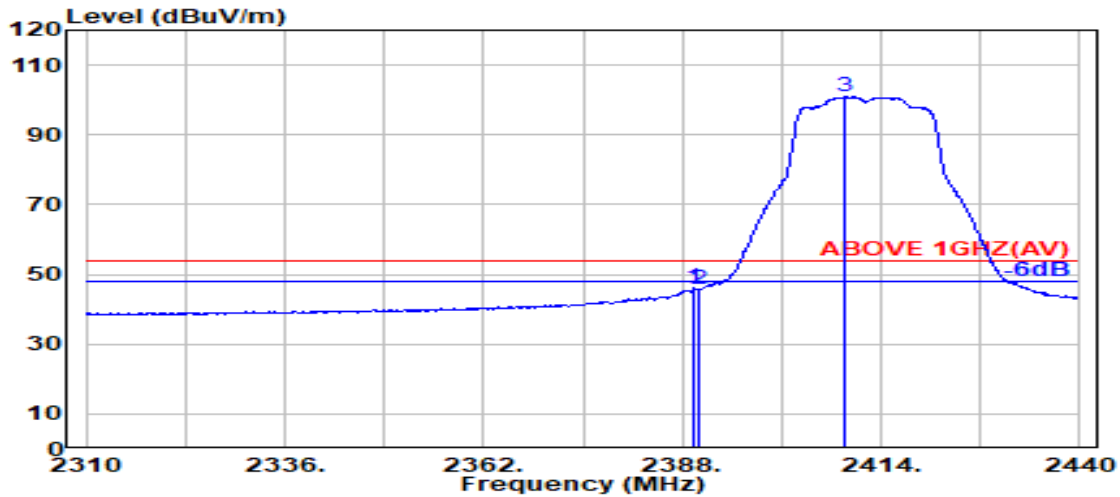


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	52.22	46.15	54.00	7.85	Average
2390.000	28.14	5.72	39.93	51.84	45.77	54.00	8.23	Average
@ 2409.300	28.14	5.74	39.93	106.95	100.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

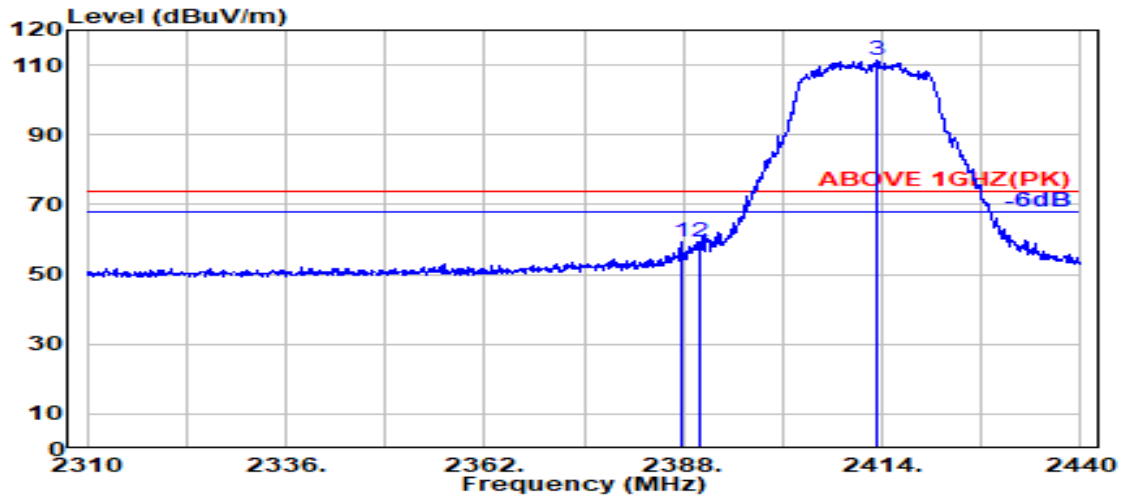

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.800	28.15	5.72	39.93	65.44	59.38	74.00	14.62	Peak
2390.000	28.14	5.72	39.93	65.54	59.47	74.00	14.53	Peak
@ 2413.300	28.15	5.75	39.93	117.43	111.41	---	---	Peak

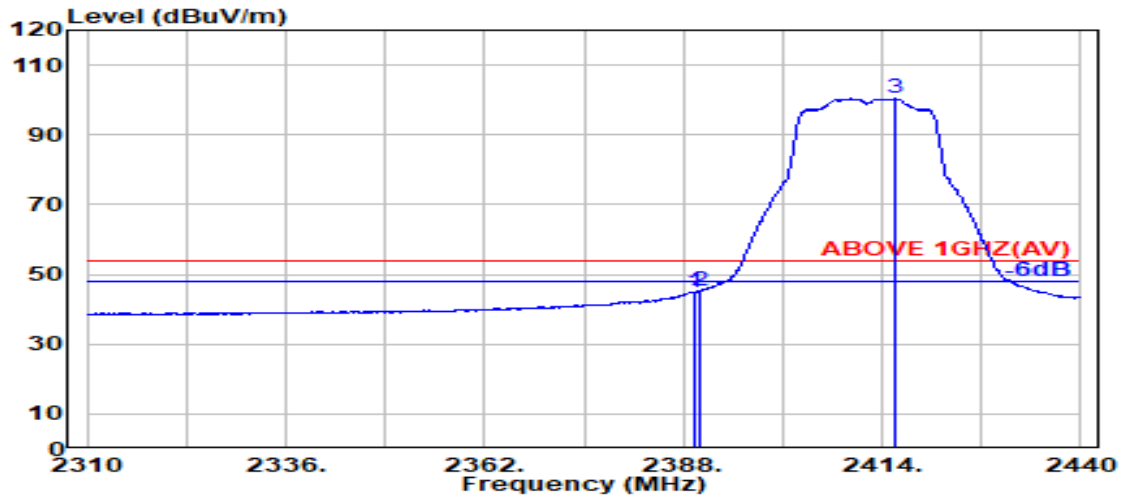


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	51.02	44.96	54.00	9.04	Average
2390.000	28.14	5.72	39.93	51.34	45.27	54.00	8.73	Average
@ 2415.800	28.16	5.75	39.93	106.51	100.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

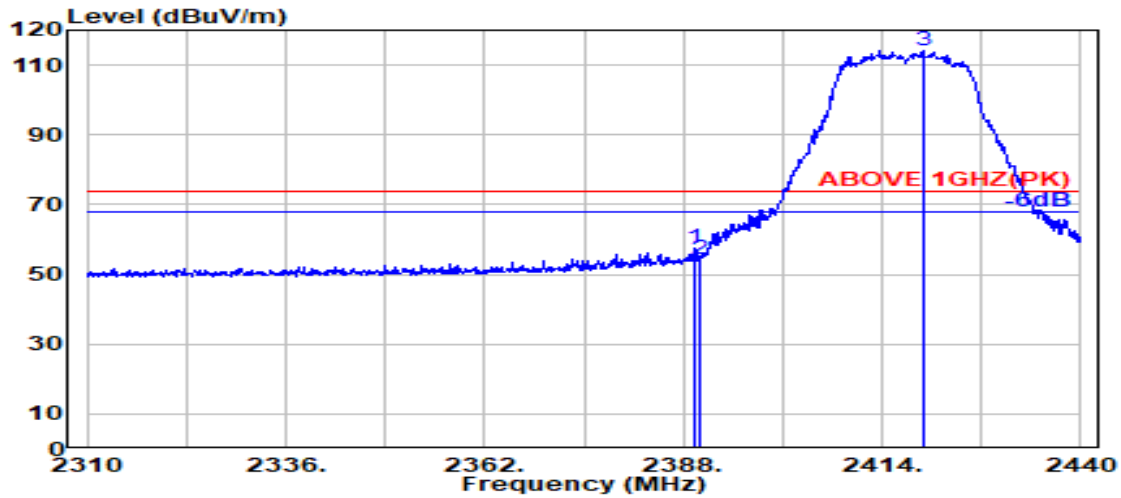

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.93	63.73	57.66	74.00	16.34	Peak
2390.000	28.14	5.72	39.93	60.33	54.27	74.00	19.73	Peak
@ 2419.500	28.18	5.76	39.93	119.97	113.98	---	---	Peak

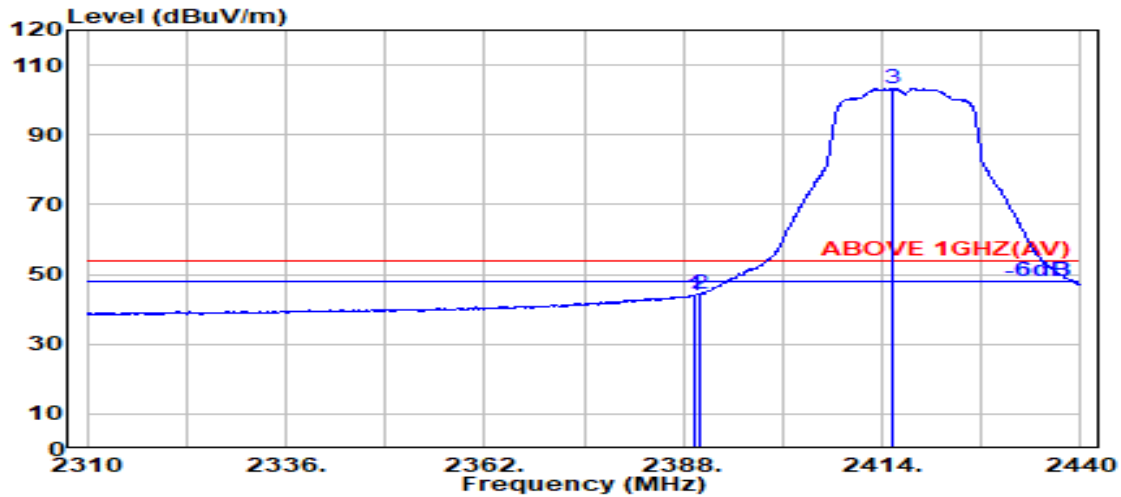


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	50.17	44.10	54.00	9.90	Average
2390.000	28.14	5.72	39.93	50.55	44.48	54.00	9.52	Average
@ 2415.400	28.16	5.75	39.93	109.35	103.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

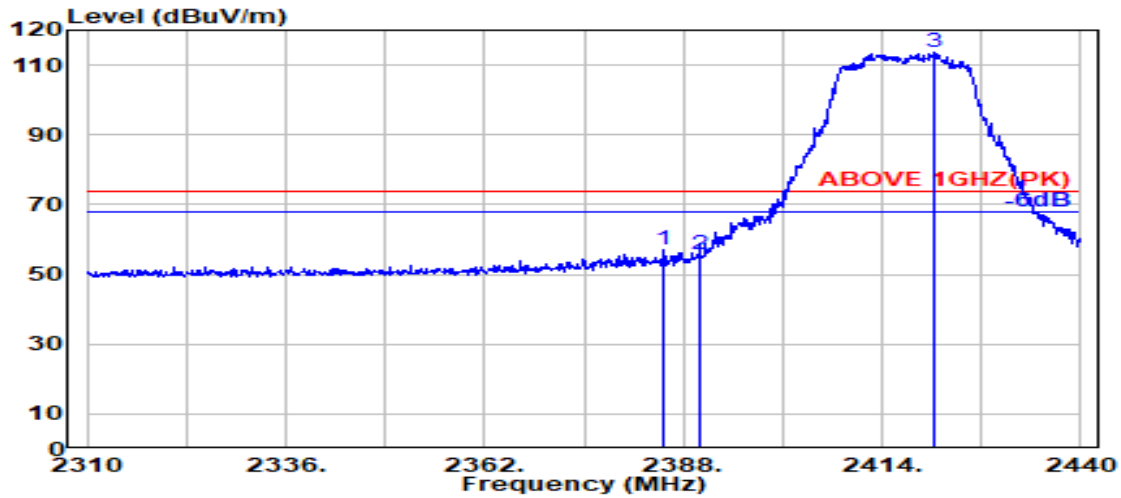

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.400	28.16	5.72	39.93	63.11	57.06	74.00	16.94	Peak
2390.000	28.14	5.72	39.93	61.58	55.52	74.00	18.48	Peak
@ 2420.900	28.18	5.76	39.93	119.82	113.83	---	---	Peak

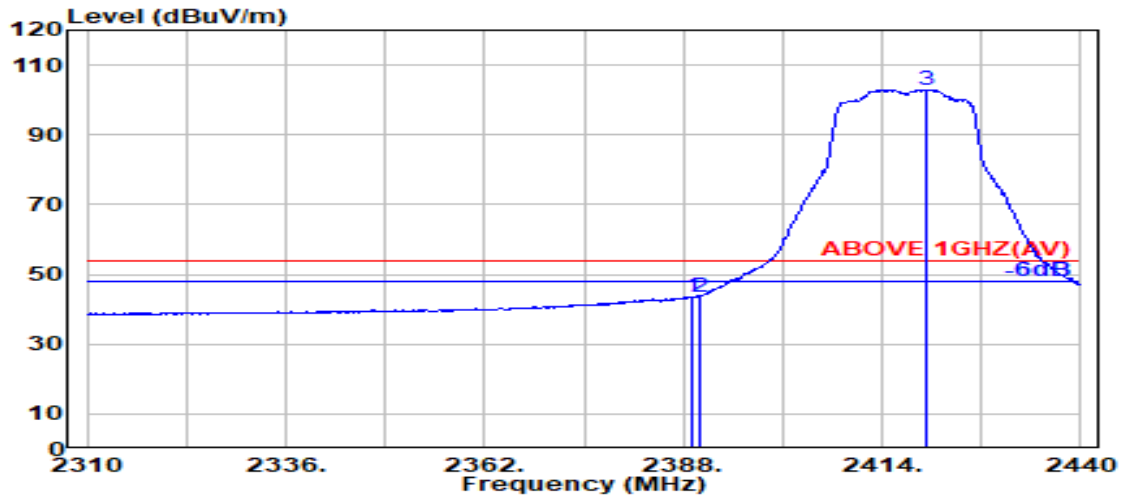


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.93	49.75	43.69	54.00	10.31	Average
2390.000	28.14	5.72	39.93	49.75	43.68	54.00	10.32	Average
@ 2419.900	28.18	5.76	39.93	108.83	102.84	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

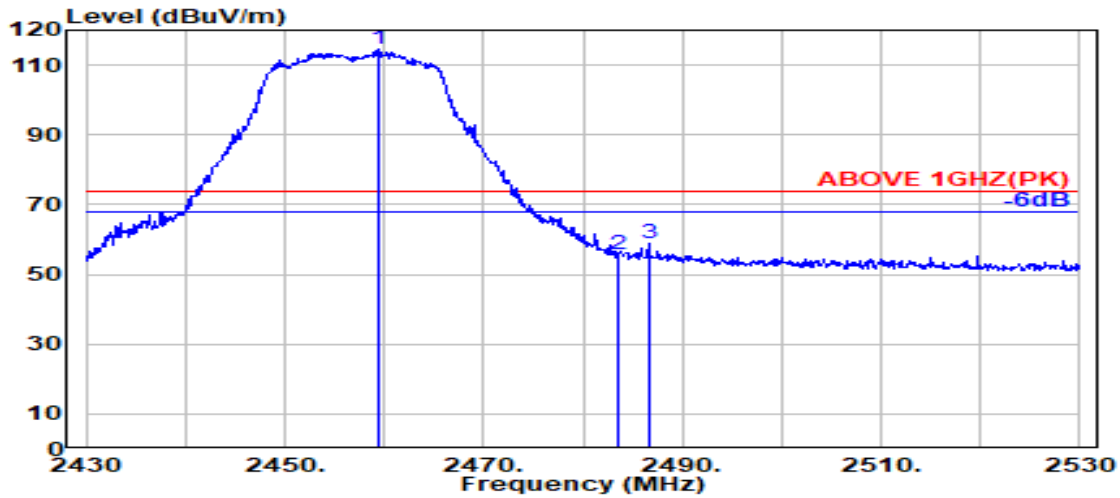

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.400	28.32	5.80	39.92	120.20	114.40	---	---	Peak
2483.500	28.37	5.83	39.92	61.36	55.64	74.00	18.36	Peak
2486.600	28.37	5.83	39.92	64.38	58.67	74.00	15.33	Peak

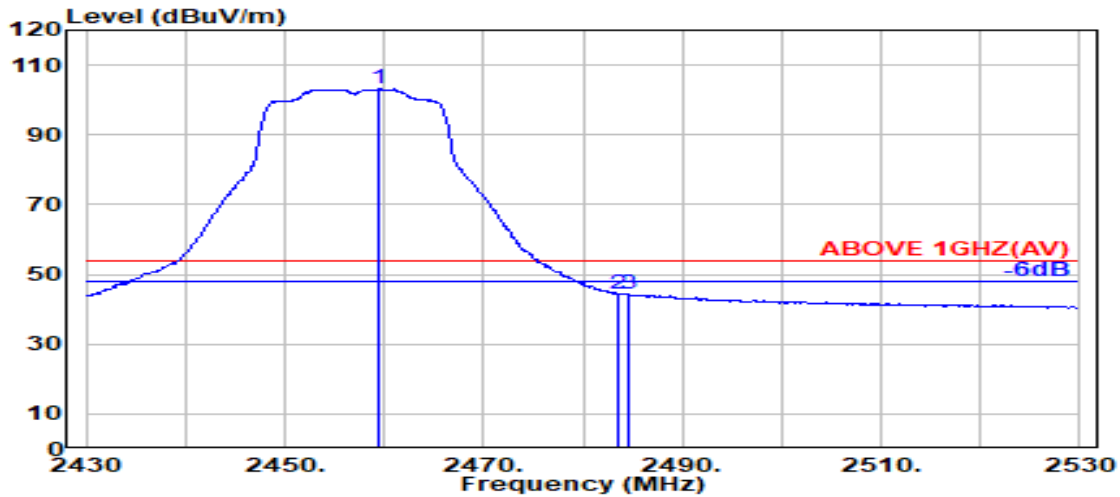


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	28.32	5.80	39.92	108.96	103.16	---	---	Average
2483.500	28.37	5.83	39.92	50.23	44.51	54.00	9.49	Average
2484.600	28.37	5.83	39.92	50.11	44.39	54.00	9.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

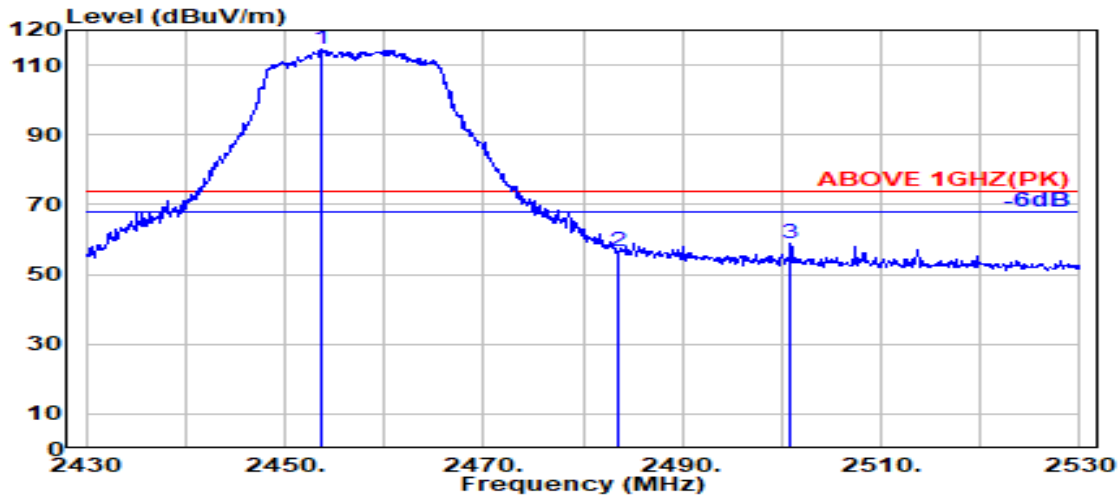

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2453.600	28.31	5.80	39.92	120.25	114.43	---	---	Peak
	2483.500	28.37	5.83	39.92	62.44	56.72	74.00	17.28	Peak
	2500.900	28.41	5.85	39.92	64.48	58.81	74.00	15.19	Peak

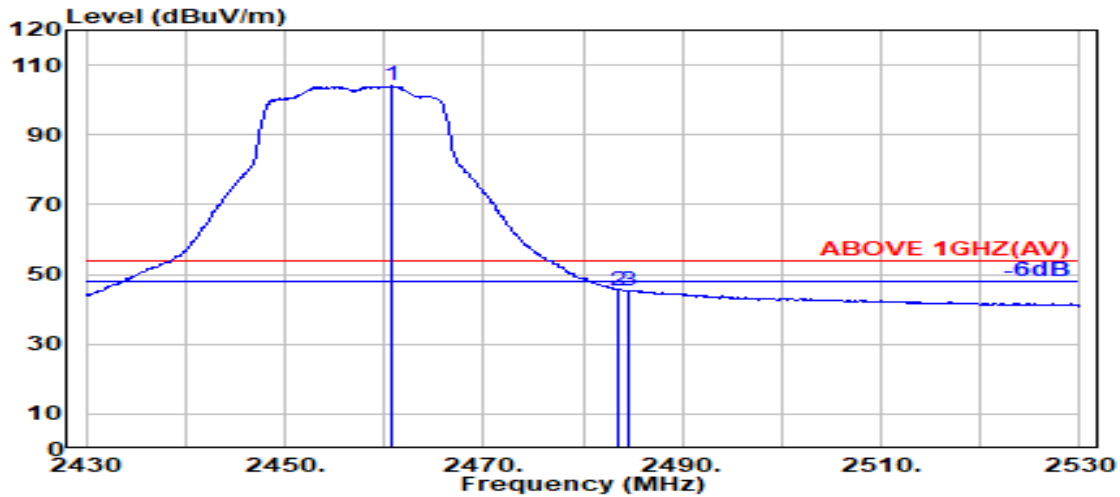


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.700	28.32	5.80	39.92	109.84	104.05	---	---	Average
	2483.500	28.37	5.83	39.92	51.08	45.35	54.00	8.65	Average
	2484.500	28.37	5.83	39.92	51.20	45.48	54.00	8.52	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

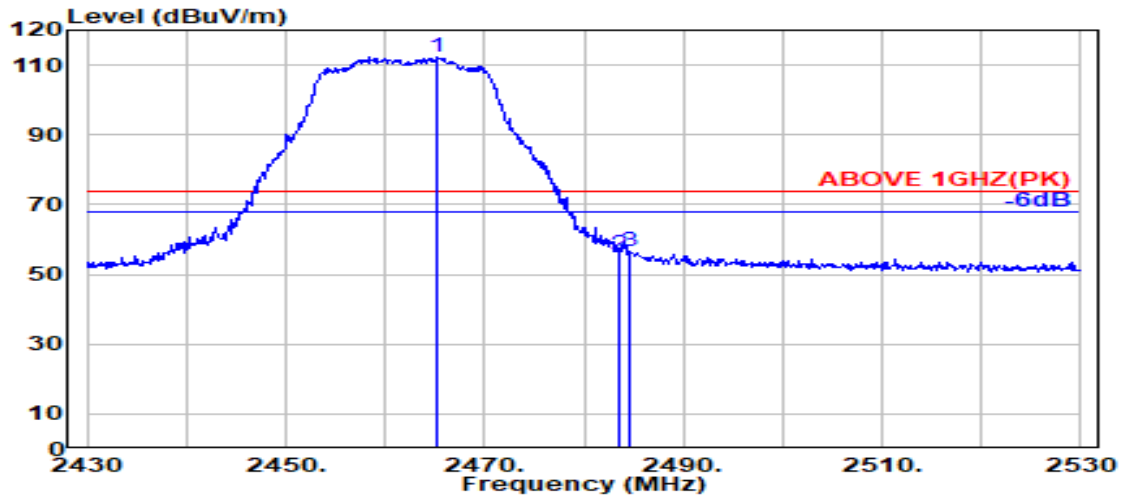

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	28.33	5.81	39.92	118.18	112.40	---	---	Peak
2483.500	28.37	5.83	39.92	61.50	55.77	74.00	18.23	Peak
2484.500	28.37	5.83	39.92	62.46	56.74	74.00	17.26	Peak

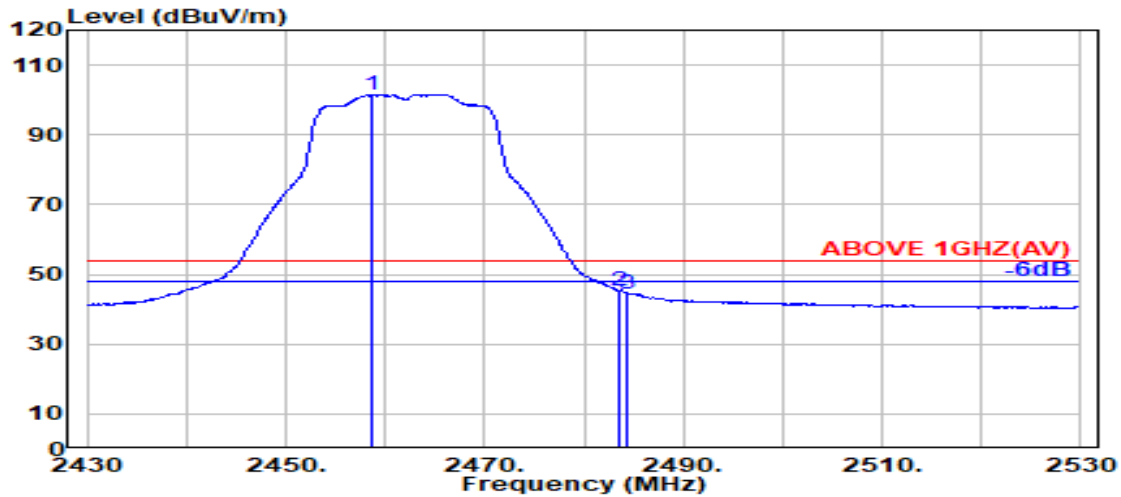


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.600	28.32	5.80	39.92	107.43	101.63	---	---	Average
2483.500	28.37	5.83	39.92	51.18	45.46	54.00	8.54	Average
2484.400	28.37	5.83	39.92	50.29	44.57	54.00	9.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

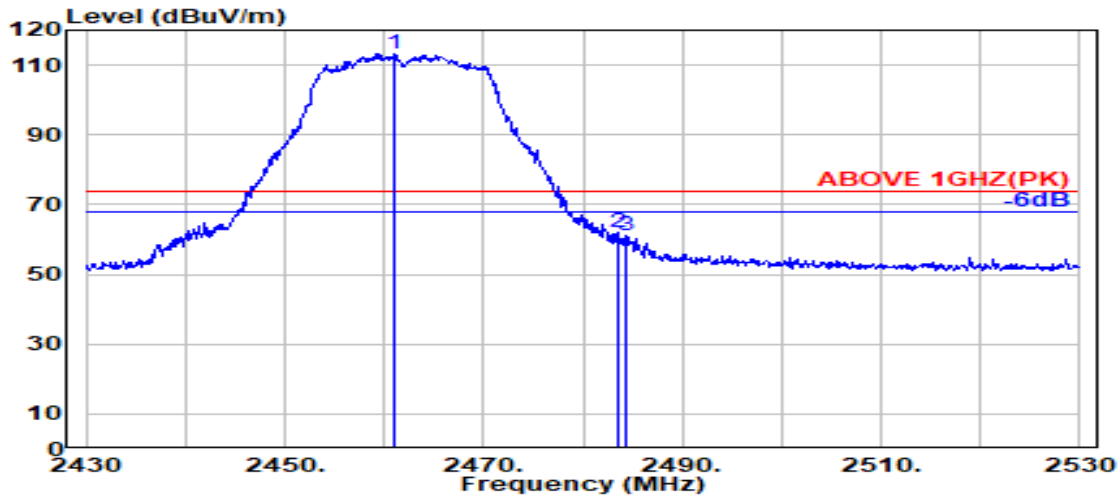

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.32	5.80	39.92	119.18	113.38	---	---	Peak
2483.500	28.37	5.83	39.92	67.64	61.91	74.00	12.09	Peak
2484.400	28.37	5.83	39.92	66.91	61.19	74.00	12.81	Peak

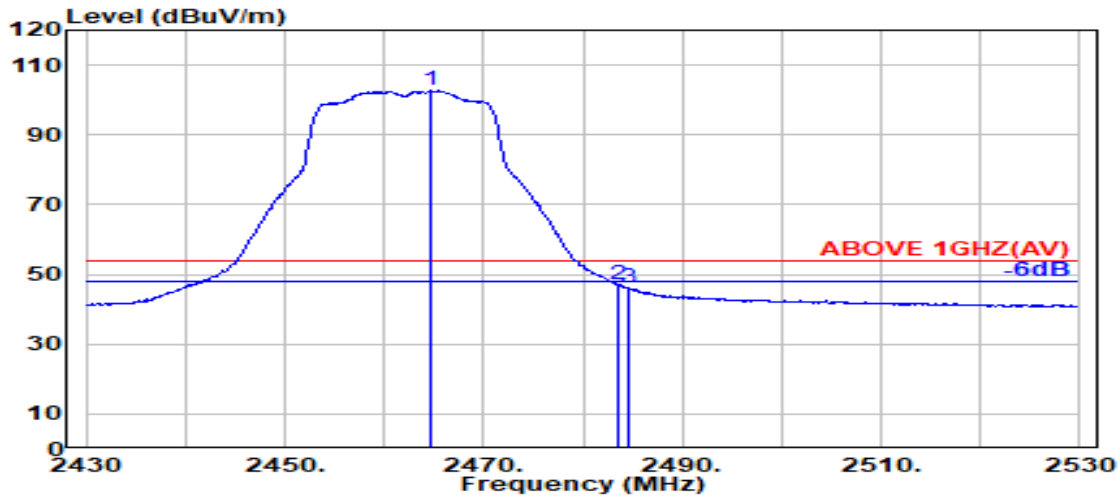


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.33	5.81	39.92	108.38	102.60	---	---	Average
2483.500	28.37	5.83	39.92	52.83	47.10	54.00	6.90	Average
2484.600	28.37	5.83	39.92	52.10	46.39	54.00	7.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

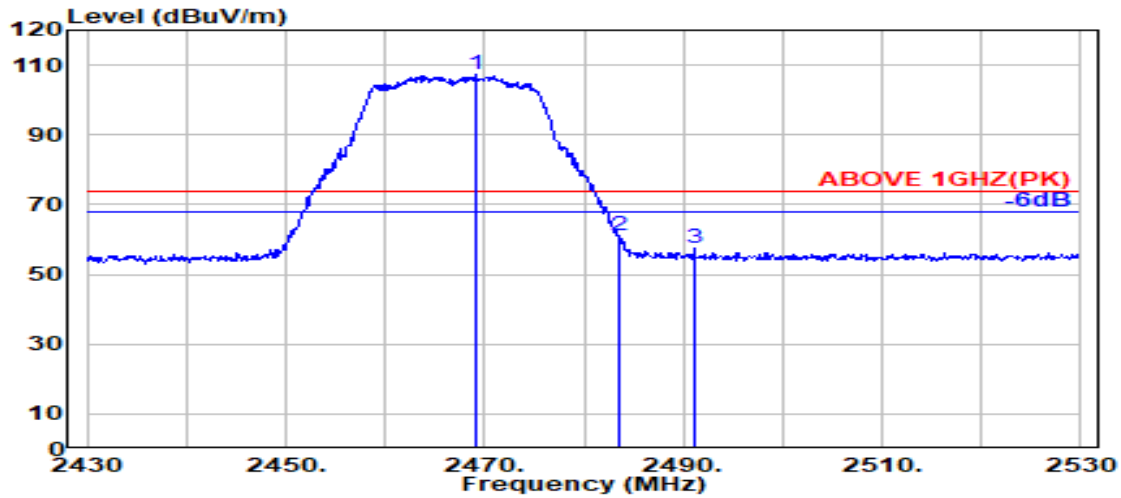

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.200	28.34	5.81	39.92	112.99	107.22	---	---	Peak
2483.500	28.37	5.83	39.92	66.93	61.21	74.00	12.79	Peak
2491.100	28.38	5.84	39.92	63.30	57.60	74.00	16.40	Peak

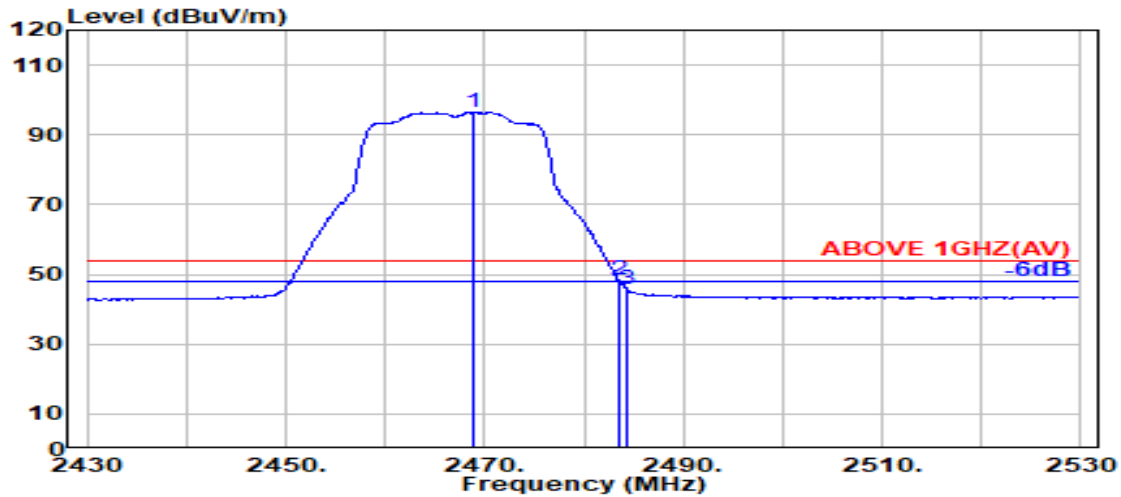


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	28.34	5.81	39.92	102.32	96.55	---	---	Average
2483.500	28.37	5.83	39.92	53.98	48.26	54.00	5.74	Average
2484.400	28.37	5.83	39.92	51.30	45.58	54.00	8.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

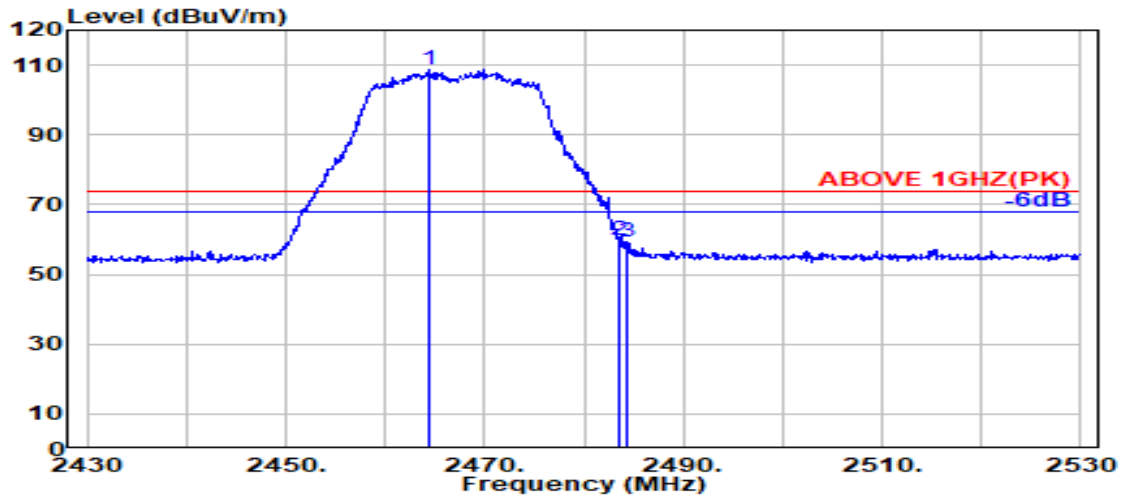

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.500	28.33	5.81	39.92	114.42	108.63	---	---	Peak
	2483.500	28.37	5.83	39.92	65.52	59.80	74.00	14.20	Peak
	2484.400	28.37	5.83	39.92	64.82	59.10	74.00	14.90	Peak

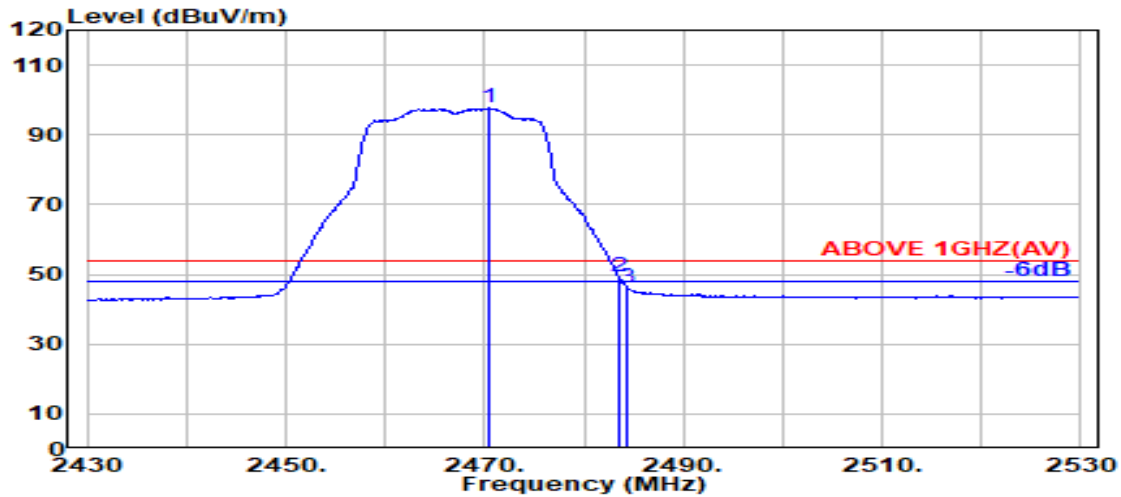


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.400	28.34	5.82	39.92	103.44	97.67	---	---	Average
	2483.500	28.37	5.83	39.92	55.14	49.42	54.00	4.58	Average
	2484.400	28.37	5.83	39.92	51.94	46.22	54.00	7.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

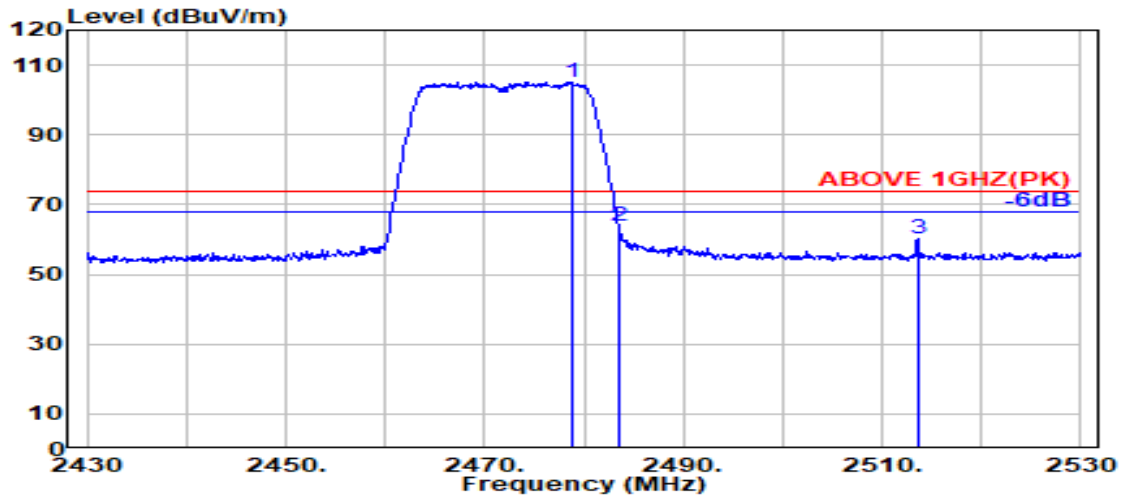

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.36	5.83	39.92	110.93	105.19	---	---	Peak
2483.500	28.37	5.83	39.92	69.60	63.87	74.00	10.13	Peak
2513.600	28.48	5.87	39.92	65.73	60.16	74.00	13.84	Peak

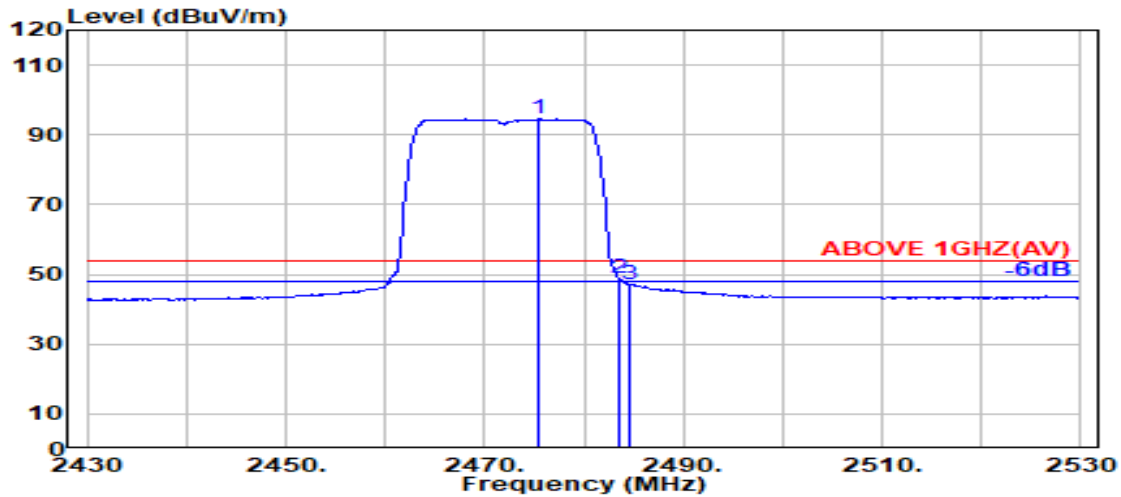


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.500	28.35	5.82	39.92	100.22	94.47	---	---	Average
2483.500	28.37	5.83	39.92	54.80	49.08	54.00	4.92	Average
2484.600	28.37	5.83	39.92	52.88	47.16	54.00	6.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

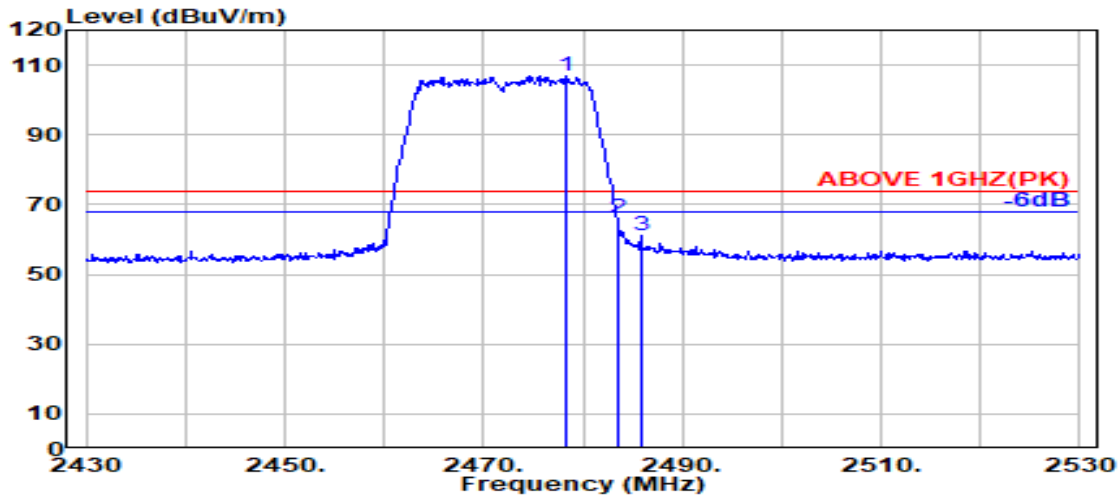

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.36	5.83	39.92	112.70	106.96	---	---	Peak
2483.500	28.37	5.83	39.92	71.65	65.93	74.00	8.07	Peak
2485.800	28.37	5.83	39.92	66.62	60.91	74.00	13.09	Peak

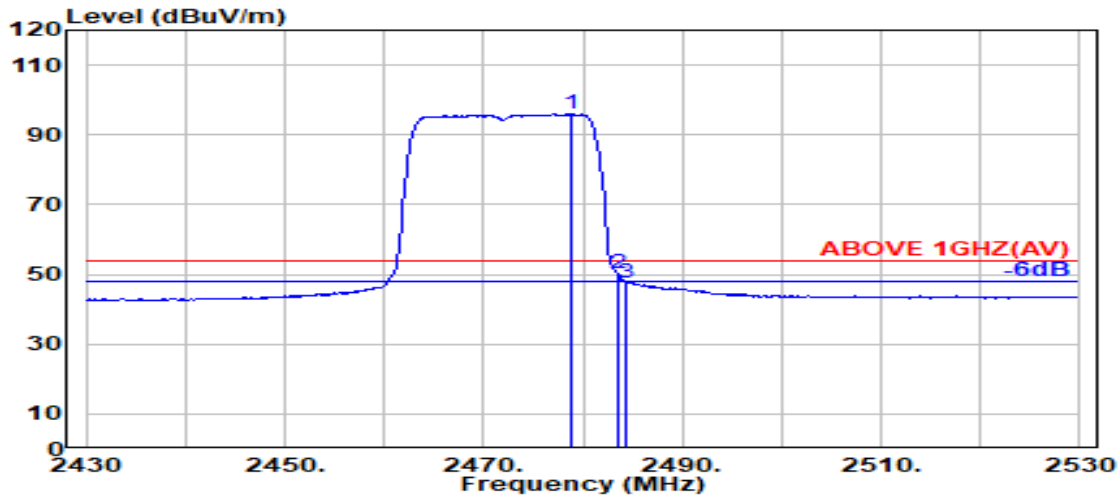


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.36	5.83	39.92	101.72	95.98	---	---	Average
2483.500	28.37	5.83	39.92	56.12	50.40	54.00	3.60	Average
2484.400	28.37	5.83	39.92	53.42	47.70	54.00	6.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

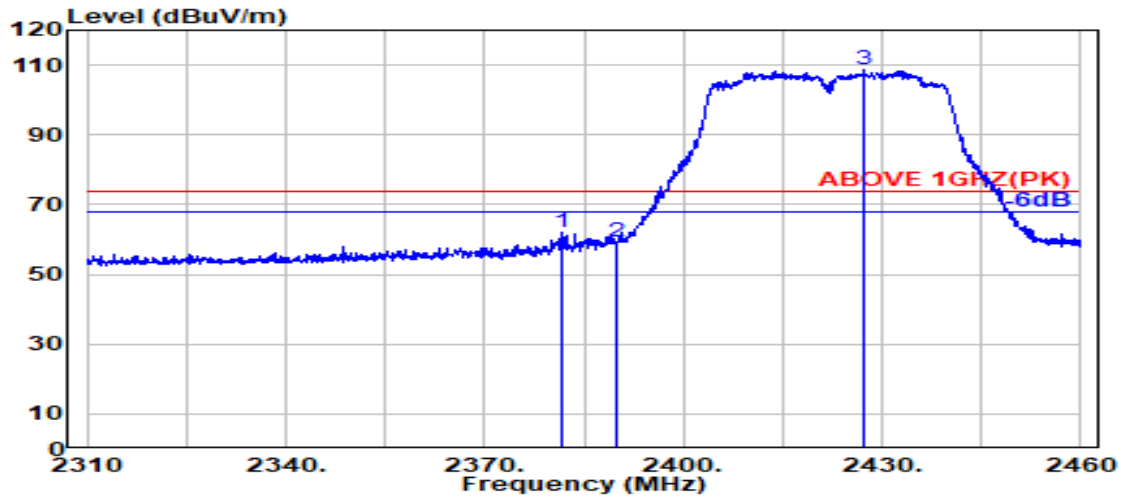

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.500	28.17	5.71	39.93	67.88	61.83	74.00	12.17	Peak
2390.000	28.14	5.72	39.93	65.29	59.22	74.00	14.78	Peak
@ 2427.400	28.21	5.77	39.93	114.41	108.46	---	---	Peak

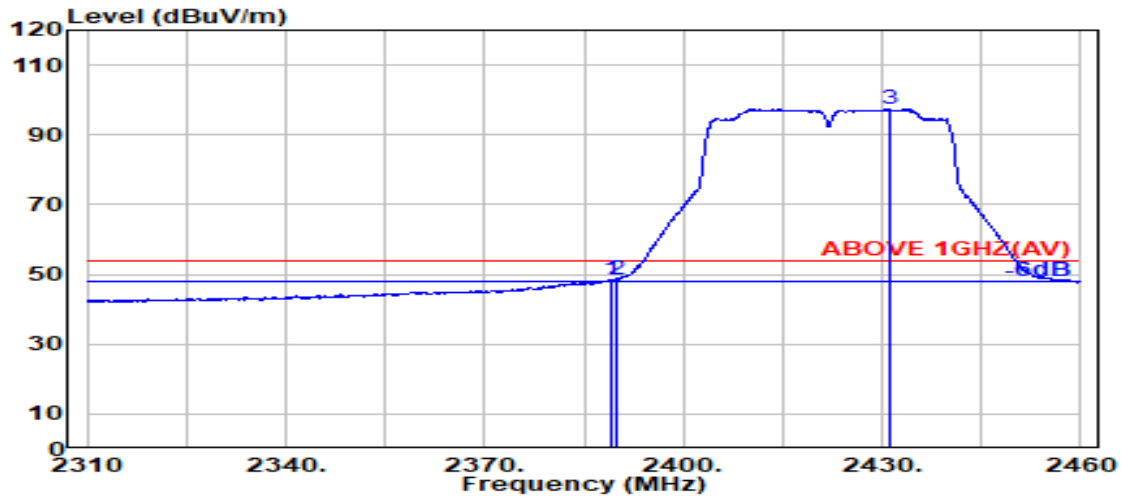


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.93	54.59	48.53	54.00	5.47	Average
2390.000	28.14	5.72	39.93	54.54	48.47	54.00	5.53	Average
@ 2431.100	28.22	5.77	39.93	103.24	97.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

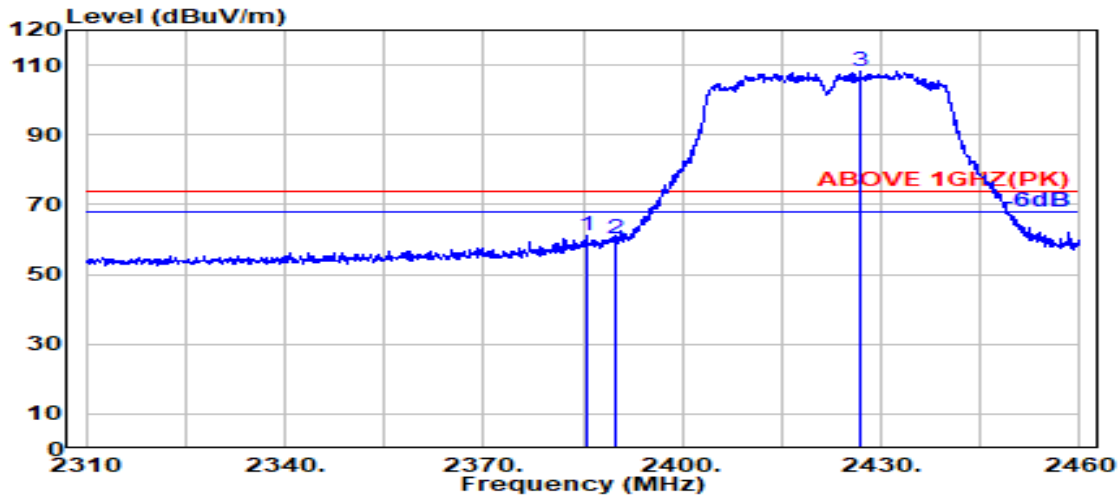

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.500	28.16	5.72	39.93	67.03	60.98	74.00	13.02	Peak
2390.000	28.14	5.72	39.93	66.16	60.09	74.00	13.91	Peak
@ 2426.900	28.21	5.76	39.93	114.19	108.24	---	---	Peak

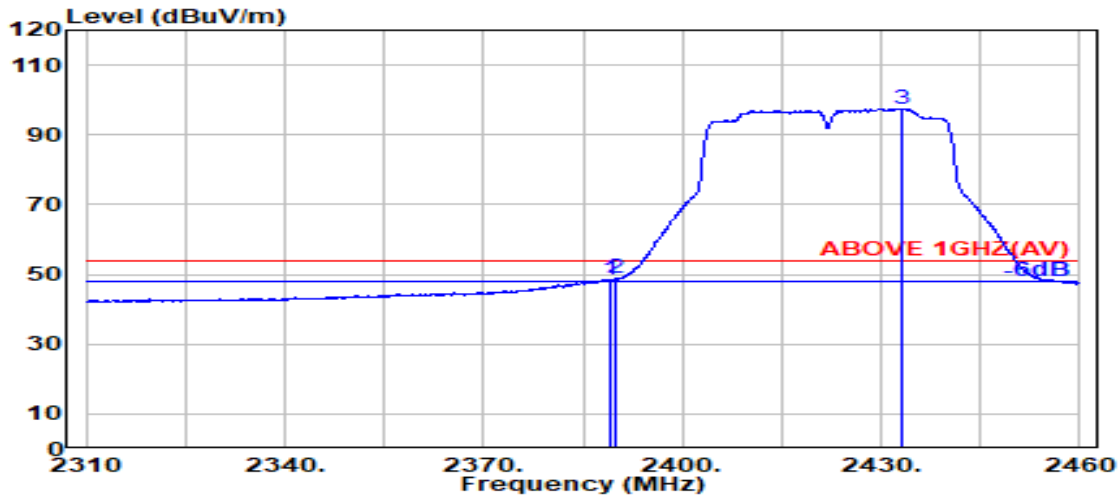


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.93	54.71	48.65	54.00	5.35	Average
2390.000	28.14	5.72	39.93	54.84	48.77	54.00	5.23	Average
@ 2433.000	28.23	5.77	39.92	103.45	97.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

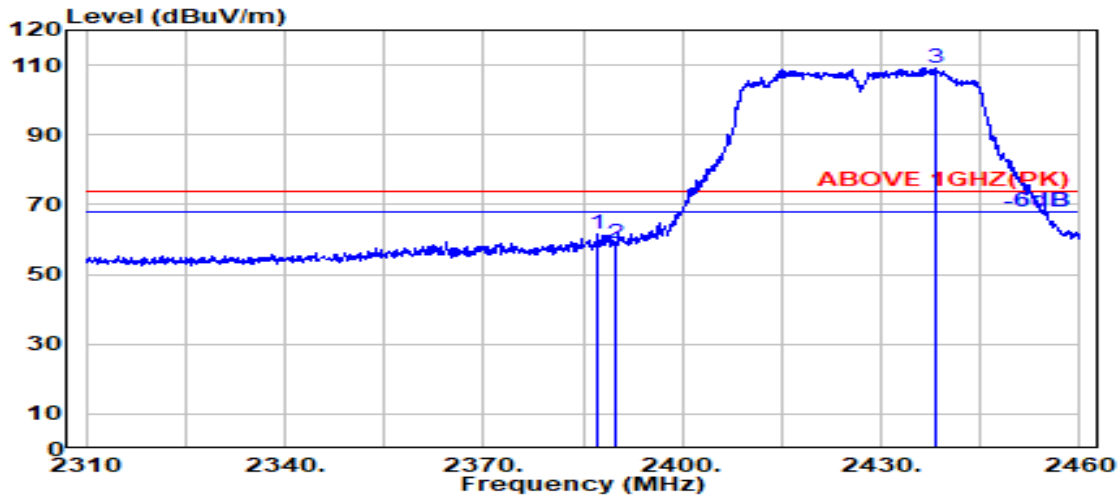

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	28.15	5.72	39.93	67.47	61.41	74.00	12.59	Peak
2390.000	28.14	5.72	39.93	64.89	58.82	74.00	15.18	Peak
@ 2438.300	28.25	5.78	39.92	114.96	109.07	---	---	Peak

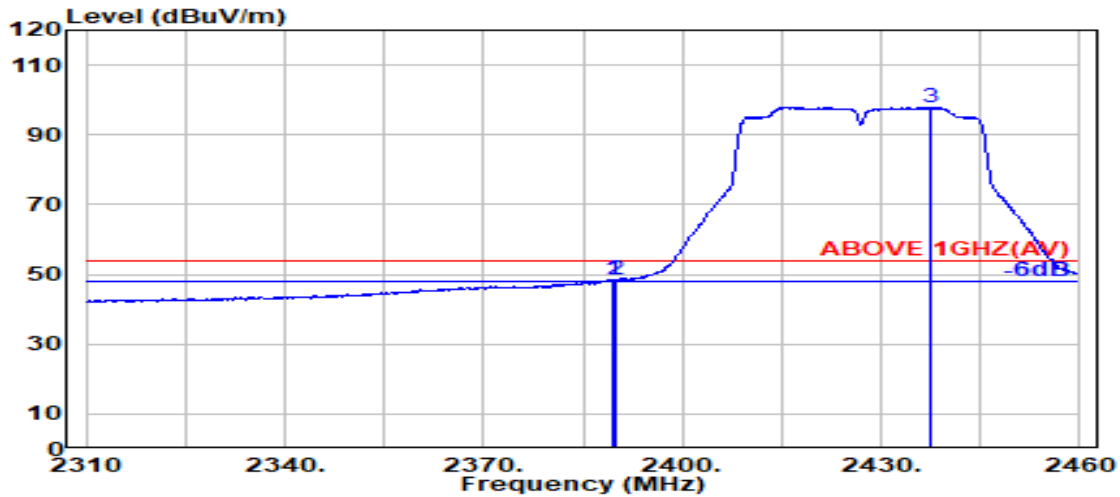


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.93	54.41	48.34	54.00	5.66	Average
2390.000	28.14	5.72	39.93	54.31	48.24	54.00	5.76	Average
@ 2437.500	28.25	5.78	39.92	103.78	97.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427 MHz
------	--------------	-----------	-------------

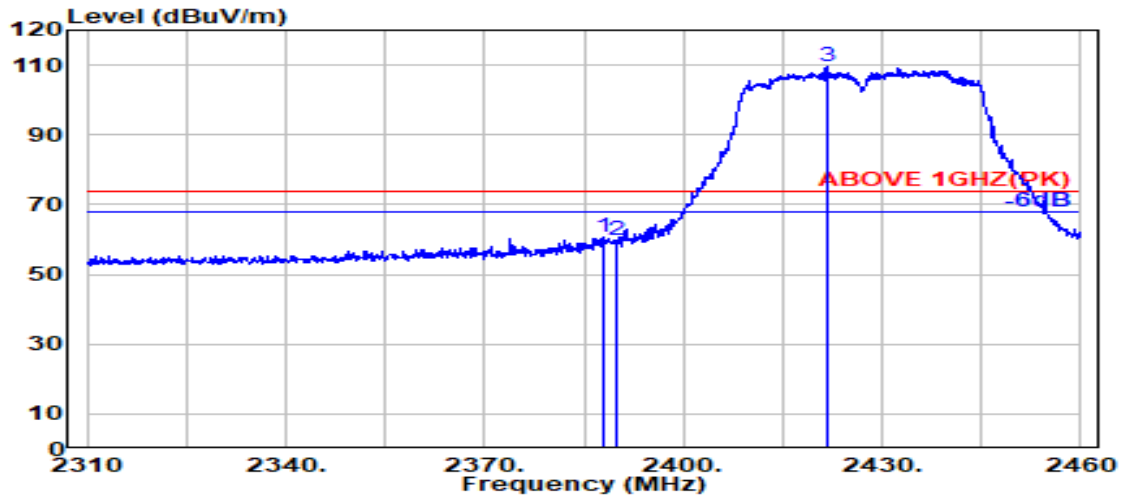

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.900	28.15	5.72	39.93	66.81	60.75	74.00	13.25	Peak
2390.000	28.14	5.72	39.93	65.79	59.72	74.00	14.28	Peak
@ 2421.600	28.19	5.76	39.93	115.39	109.41	---	---	Peak

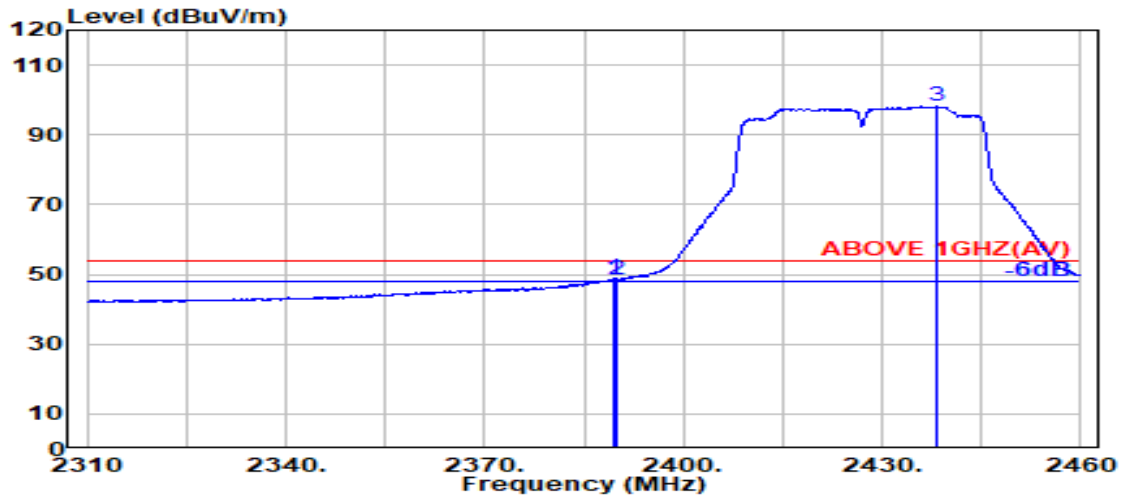


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	54.77	48.71	54.00	5.29	Average
2390.000	28.14	5.72	39.93	54.62	48.55	54.00	5.45	Average
@ 2438.300	28.25	5.78	39.92	104.10	98.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

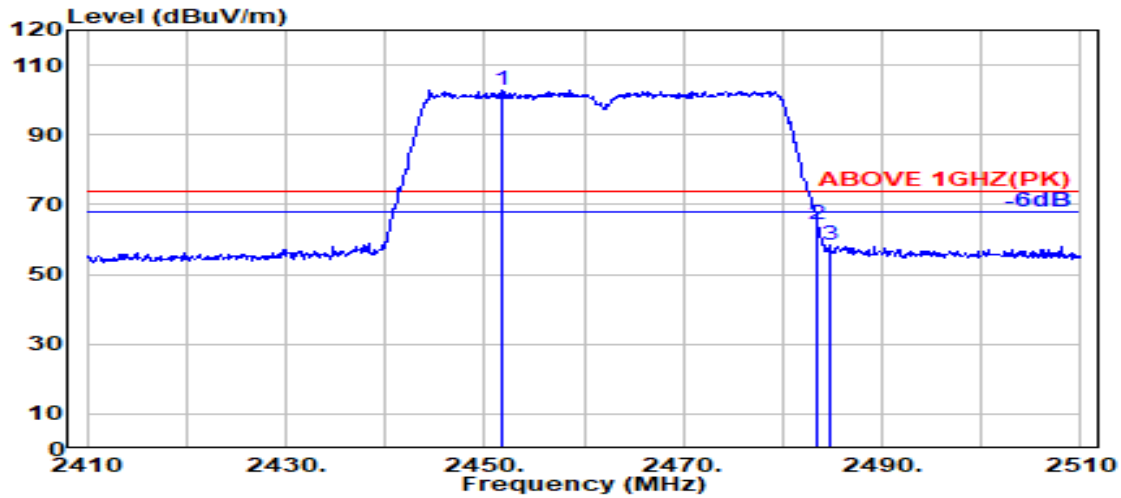

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.800	28.30	5.79	39.92	108.73	102.91	---	---	Peak
2483.500	28.37	5.83	39.92	69.98	64.25	74.00	9.75	Peak
2484.700	28.37	5.83	39.92	64.17	58.45	74.00	15.55	Peak

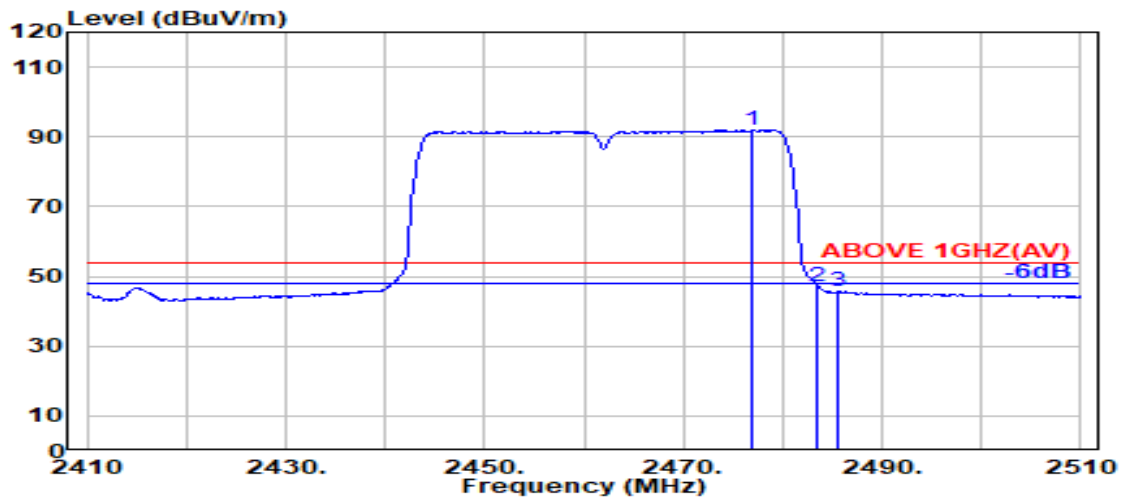


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.900	28.35	5.82	39.92	97.57	91.83	---	---	Average
2483.500	28.37	5.83	39.92	53.02	47.29	54.00	6.71	Average
2485.600	28.37	5.83	39.92	51.38	45.66	54.00	8.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

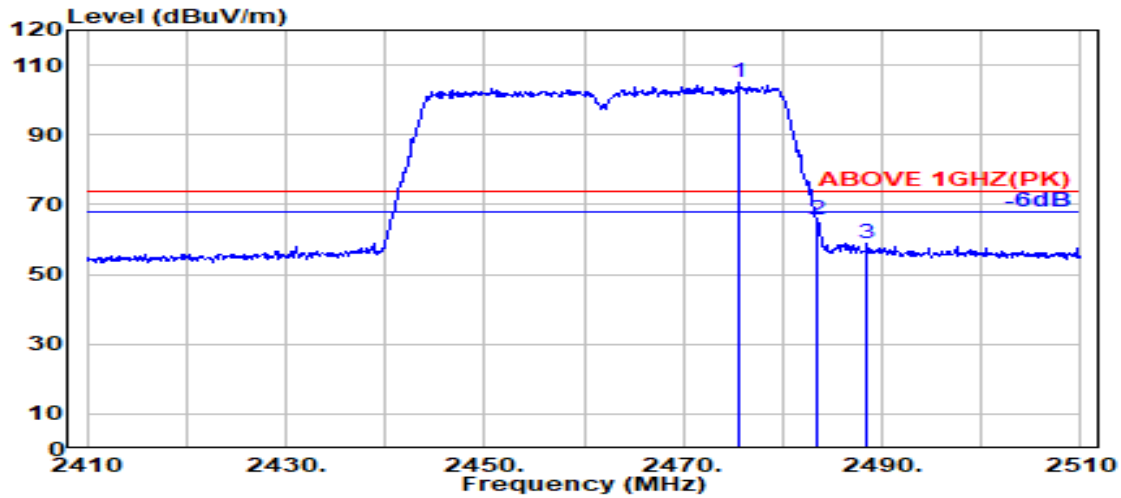

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.500	28.35	5.82	39.92	110.81	105.06	---	---	Peak
2483.500	28.37	5.83	39.92	71.22	65.50	74.00	8.50	Peak
2488.500	28.38	5.84	39.92	64.71	59.01	74.00	14.99	Peak

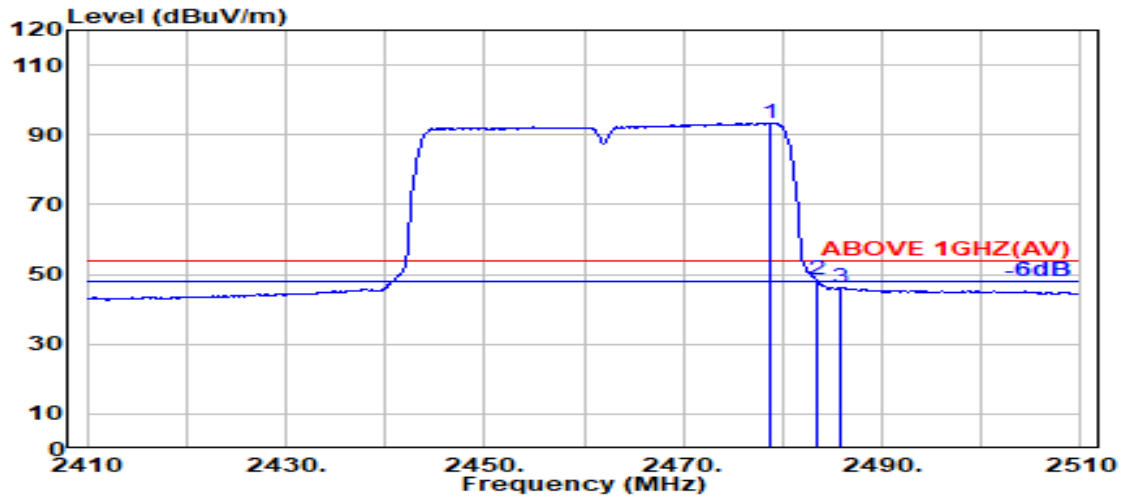


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.36	5.83	39.92	99.14	93.40	---	---	Average
2483.500	28.37	5.83	39.92	53.96	48.24	54.00	5.76	Average
2485.900	28.37	5.83	39.92	51.88	46.17	54.00	7.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

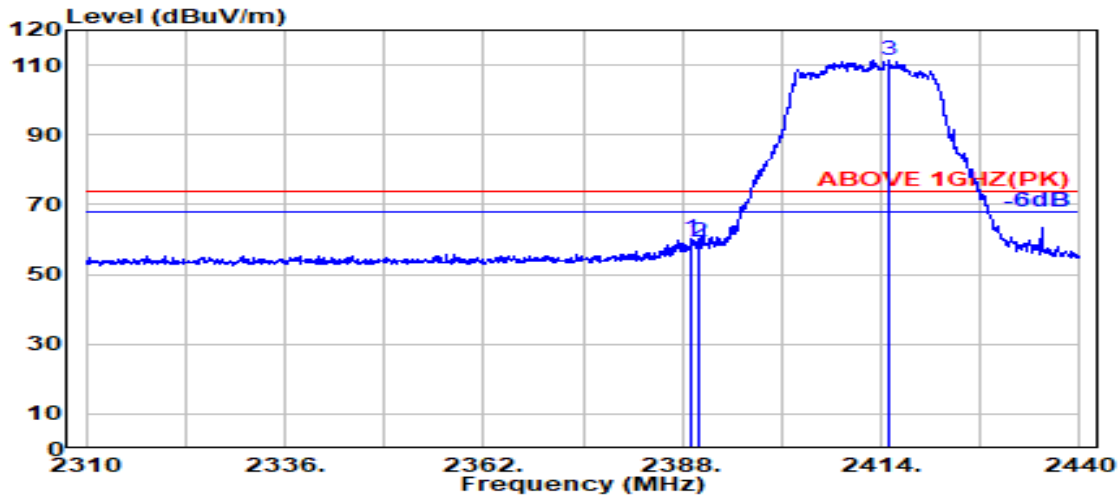

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.93	66.11	60.05	74.00	13.95	Peak
2390.000	28.14	5.72	39.93	65.17	59.10	74.00	14.90	Peak
@ 2415.000	28.16	5.75	39.93	117.41	111.40	---	---	Peak

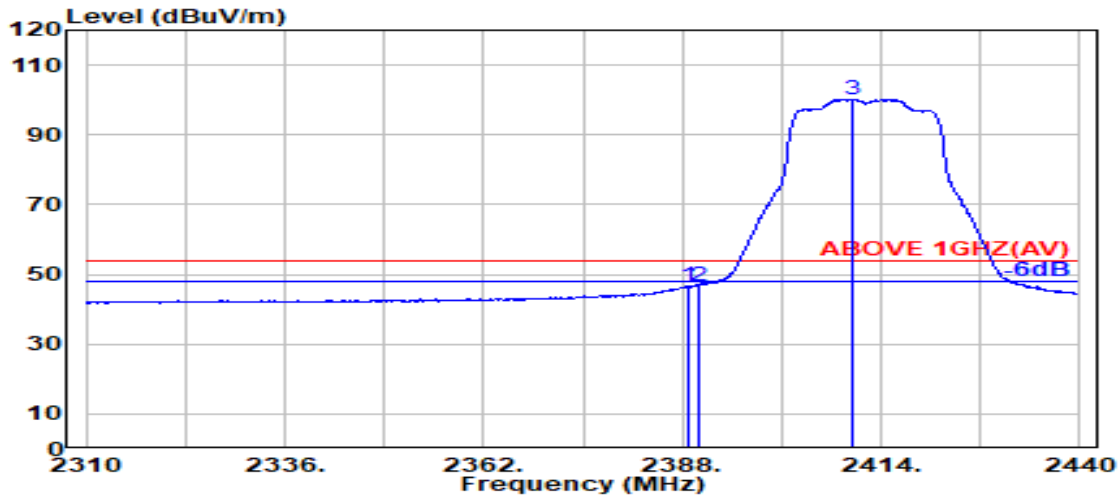


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.14	5.72	39.93	52.72	46.65	54.00	7.35	Average
2390.000	28.14	5.72	39.93	52.84	46.78	54.00	7.22	Average
@ 2410.300	28.14	5.75	39.93	106.28	100.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

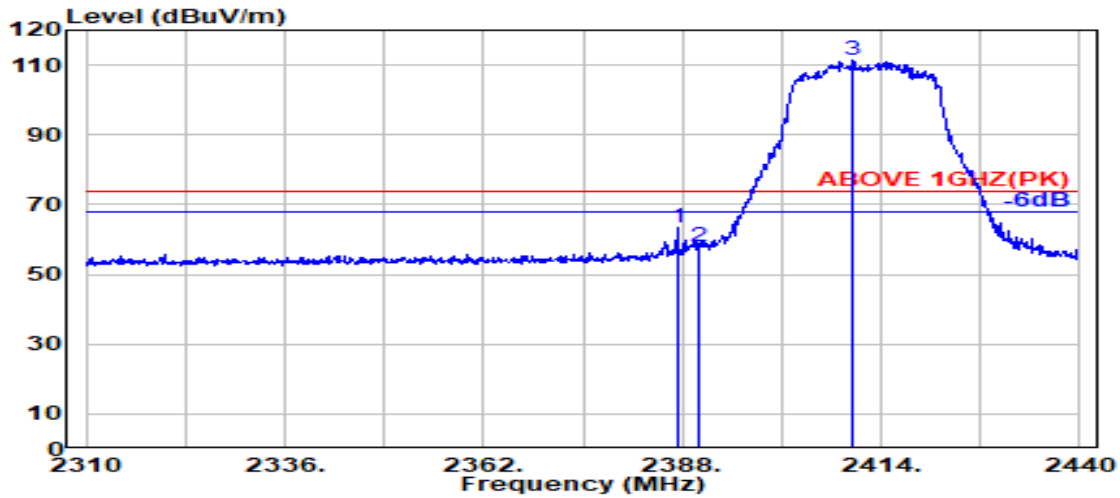

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.300	28.15	5.72	39.93	69.49	63.43	74.00	10.57	Peak
2390.000	28.14	5.72	39.93	64.04	57.97	74.00	16.03	Peak
@ 2410.400	28.14	5.75	39.93	117.24	111.20	---	---	Peak

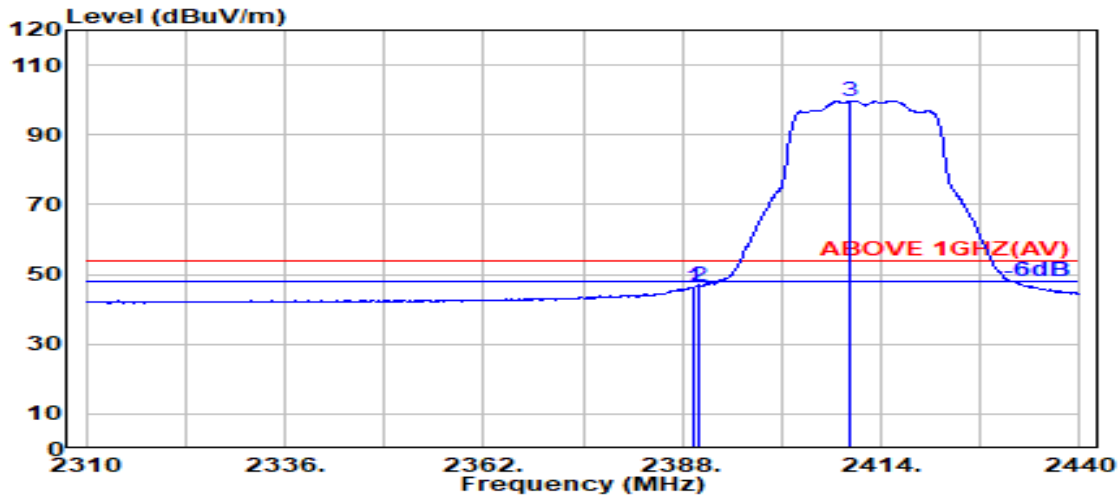


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	52.47	46.40	54.00	7.60	Average
2390.000	28.14	5.72	39.93	52.57	46.50	54.00	7.50	Average
@ 2409.900	28.14	5.74	39.93	105.81	99.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

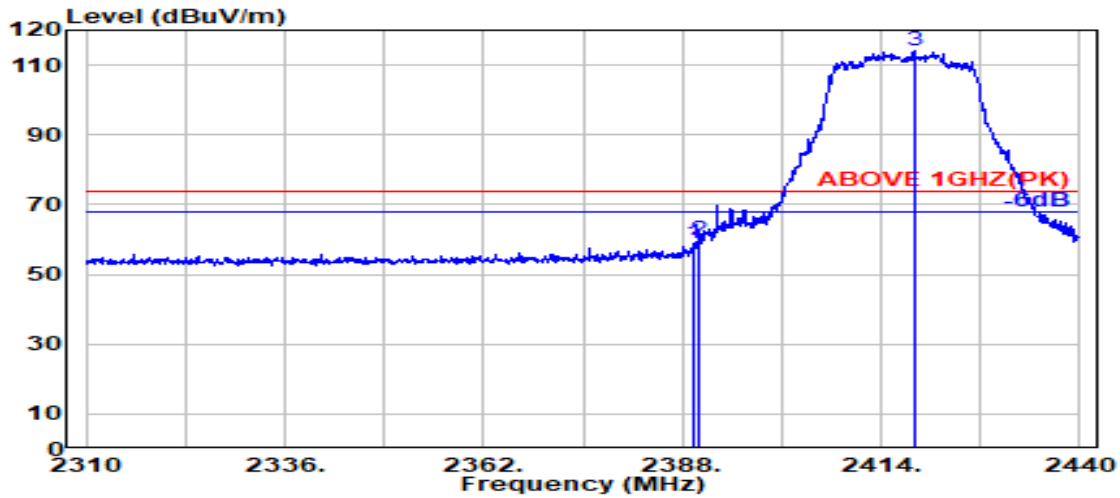

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.93	64.71	58.64	74.00	15.36	Peak
2390.000	28.14	5.72	39.93	65.69	59.62	74.00	14.38	Peak
@ 2418.300	28.17	5.75	39.93	120.10	114.10	---	---	Peak

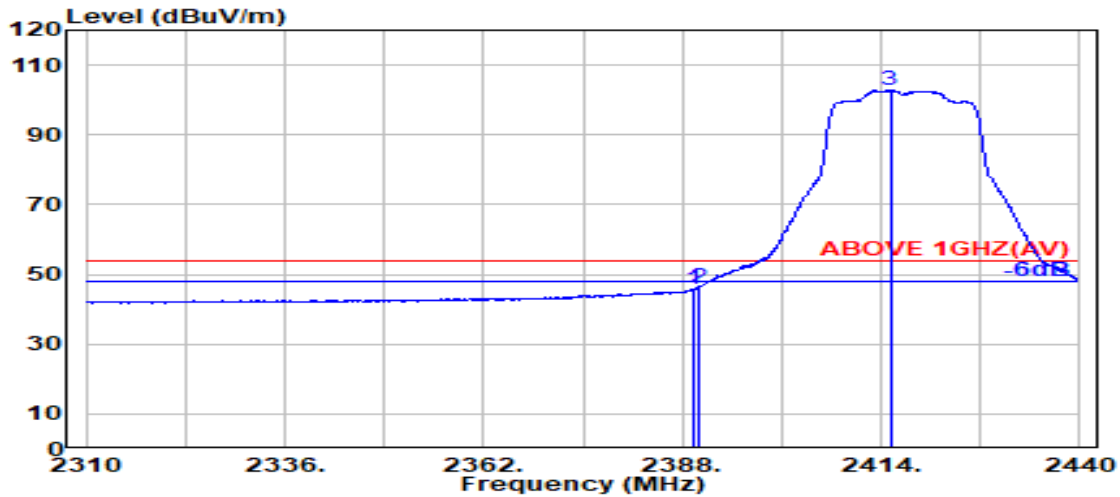


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	51.99	45.92	54.00	8.08	Average
2390.000	28.14	5.72	39.93	52.15	46.08	54.00	7.92	Average
@ 2415.200	28.16	5.75	39.93	108.78	102.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

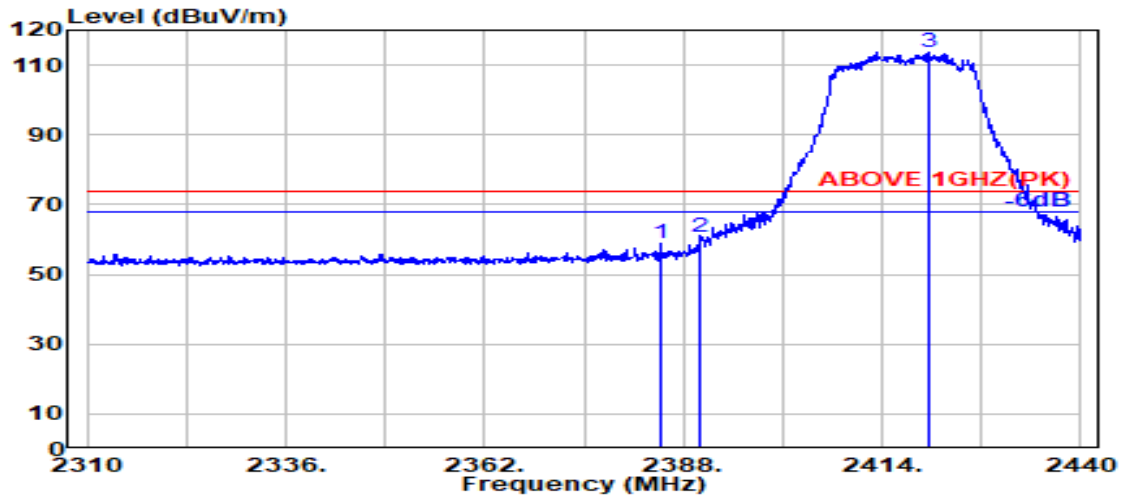

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.000	28.16	5.71	39.93	64.92	58.87	74.00	15.13	Peak
2390.000	28.14	5.72	39.93	66.86	60.79	74.00	13.21	Peak
@ 2420.100	28.18	5.76	39.93	119.80	113.81	---	---	Peak

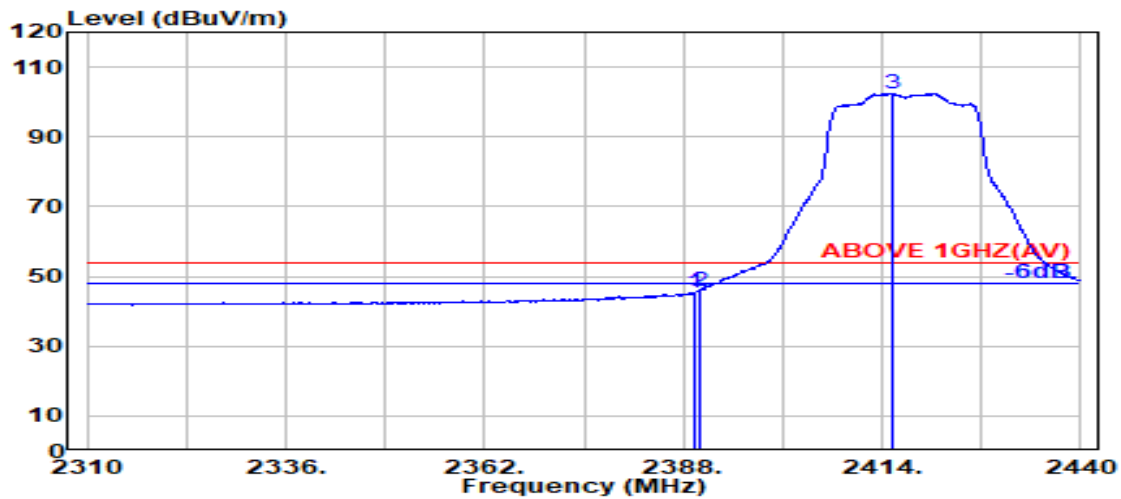


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.93	51.55	45.48	54.00	8.52	Average
2390.000	28.14	5.72	39.93	51.94	45.88	54.00	8.12	Average
@ 2415.500	28.16	5.75	39.93	108.43	102.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

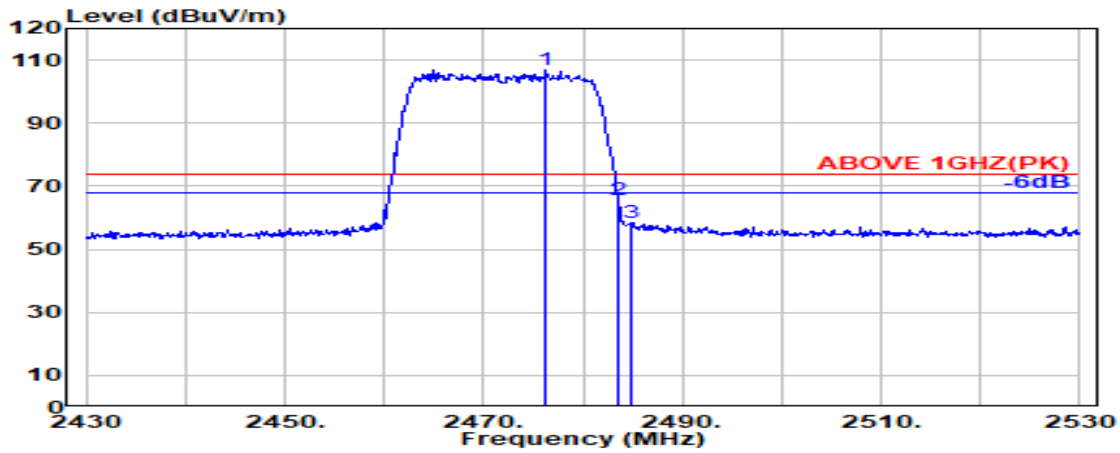

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.200	28.35	5.82	39.92	112.76	107.01	---	---	Peak
2483.500	28.37	5.83	39.92	71.40	65.67	74.00	8.33	Peak
2484.800	28.37	5.83	39.92	64.14	58.42	74.00	15.58	Peak

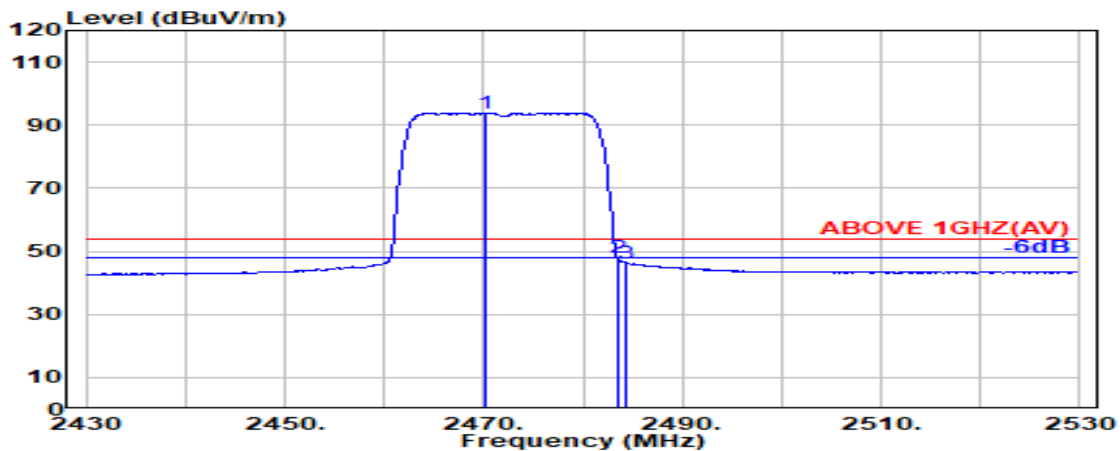


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.300	28.34	5.82	39.92	99.68	93.92	---	---	Average
2483.500	28.37	5.83	39.92	53.71	47.99	54.00	6.01	Average
2484.400	28.37	5.83	39.92	52.02	46.30	54.00	7.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

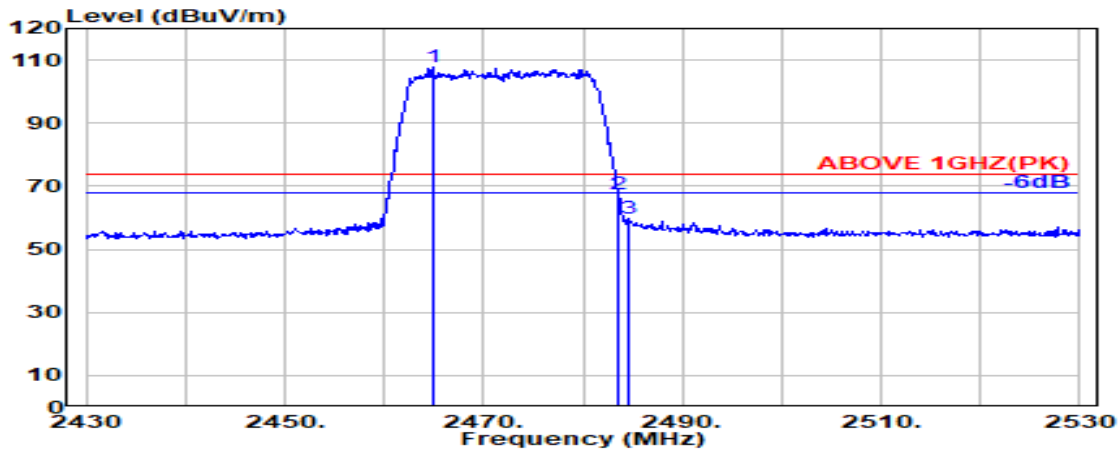

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.33	5.81	39.92	113.46	107.68	---	---	Peak
2483.500	28.37	5.83	39.92	73.30	67.57	74.00	6.43	Peak
2484.600	28.37	5.83	39.92	65.61	59.89	74.00	14.11	Peak

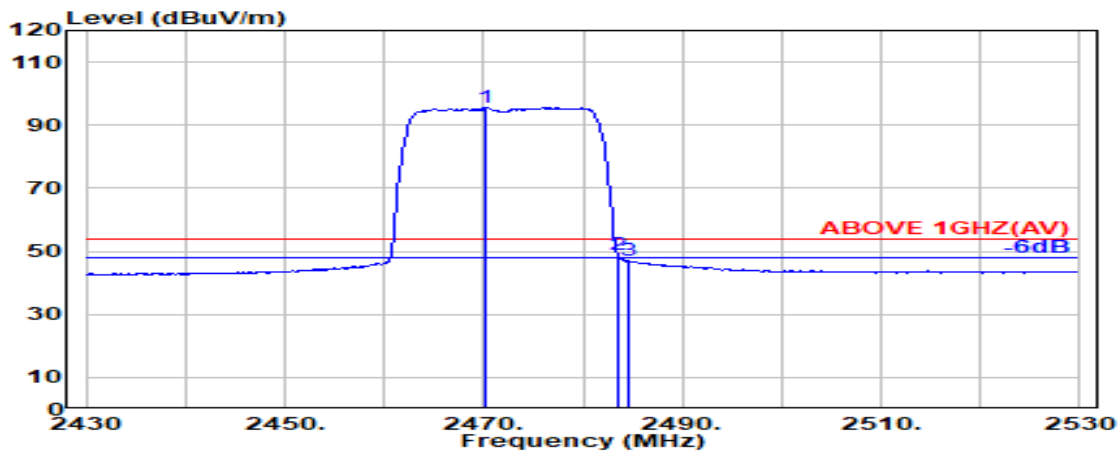


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.100	28.34	5.82	39.92	101.35	95.59	---	---	Average
2483.500	28.37	5.83	39.92	54.76	49.03	54.00	4.97	Average
2484.600	28.37	5.83	39.92	52.81	47.10	54.00	6.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

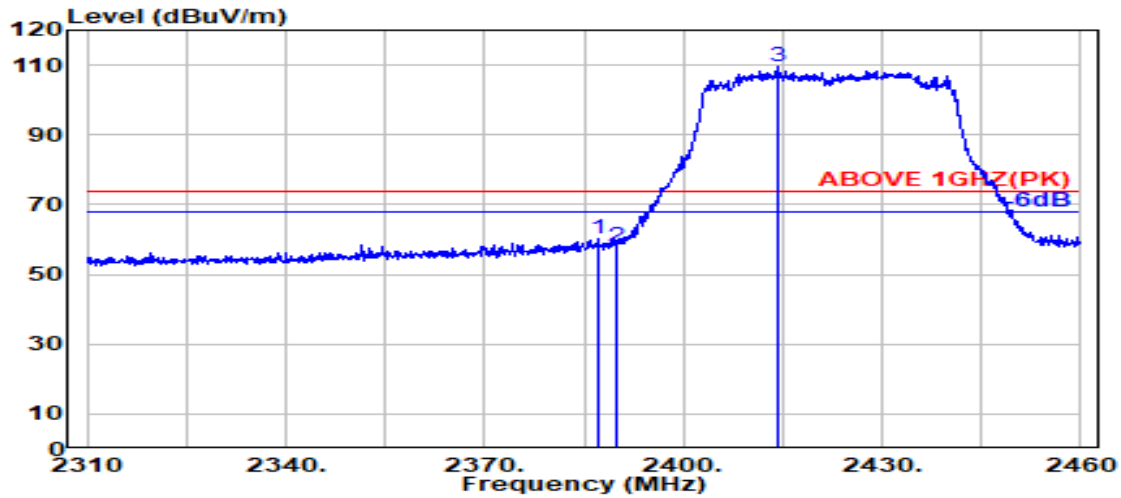

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.200	28.15	5.72	39.93	66.40	60.34	74.00	13.66	Peak
2390.000	28.14	5.72	39.93	64.21	58.14	74.00	15.86	Peak
@ 2414.400	28.16	5.75	39.93	115.41	109.39	---	---	Peak

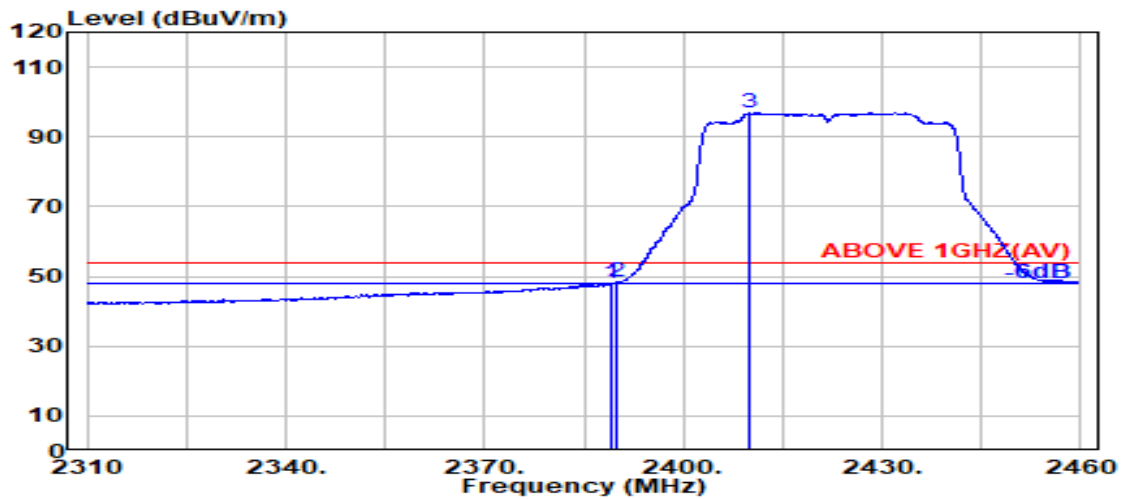


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.93	54.11	48.05	54.00	5.95	Average
2390.000	28.14	5.72	39.93	54.40	48.33	54.00	5.67	Average
@ 2410.000	28.14	5.74	39.93	102.98	96.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

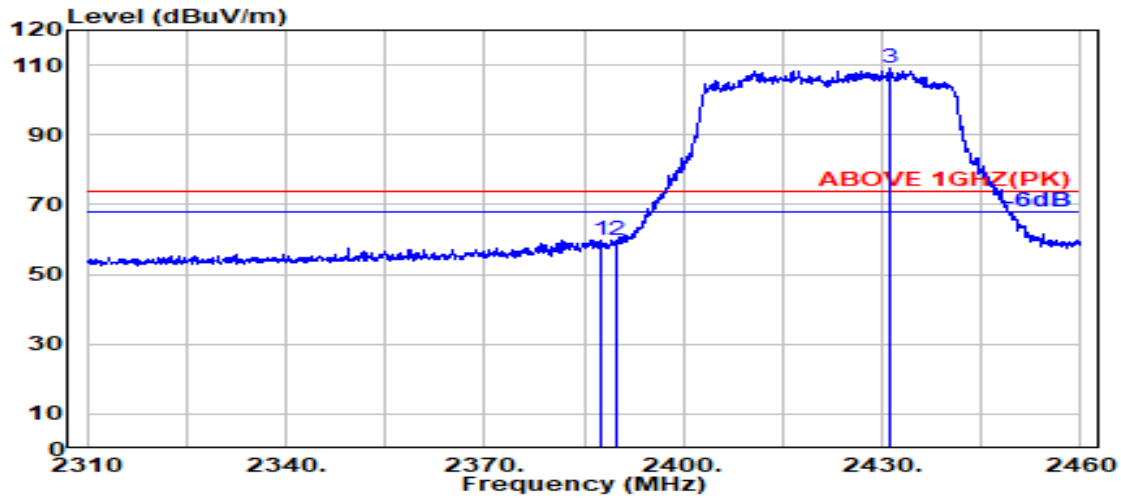

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.600	28.15	5.72	39.93	65.98	59.92	74.00	14.08	Peak
2390.000	28.14	5.72	39.93	65.91	59.85	74.00	14.15	Peak
@ 2431.000	28.22	5.77	39.93	115.20	109.27	---	---	Peak

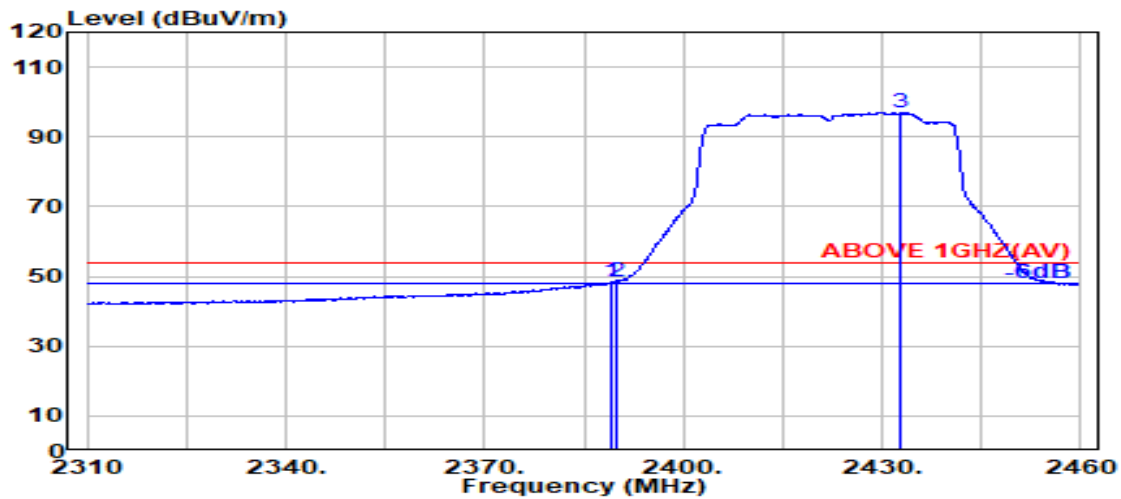


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.93	54.38	48.31	54.00	5.69	Average
2390.000	28.14	5.72	39.93	54.68	48.61	54.00	5.39	Average
@ 2432.900	28.23	5.77	39.92	102.93	97.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

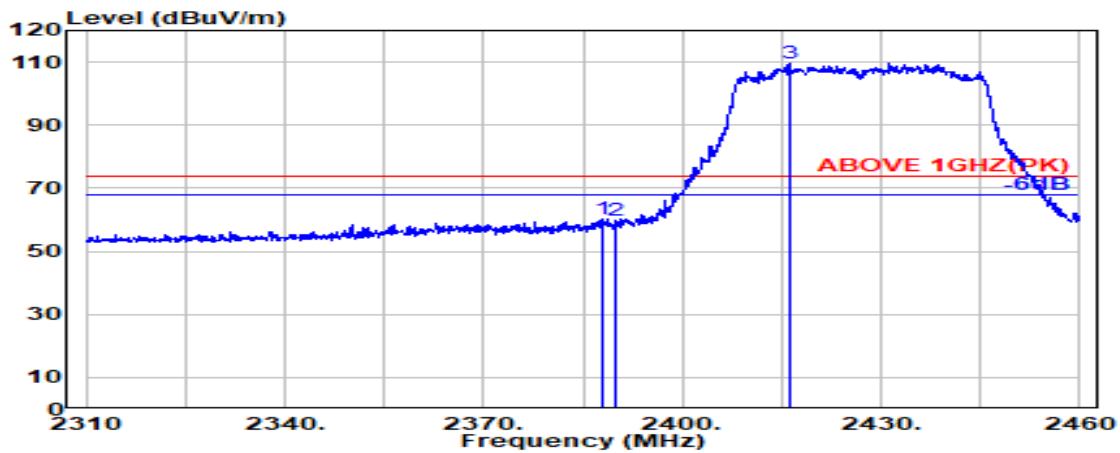

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.800	28.15	5.72	39.93	66.24	60.17	74.00	13.83	Peak
2390.000	28.14	5.72	39.93	65.78	59.72	74.00	14.28	Peak
@ 2416.100	28.16	5.75	39.93	115.76	109.75	---	---	Peak

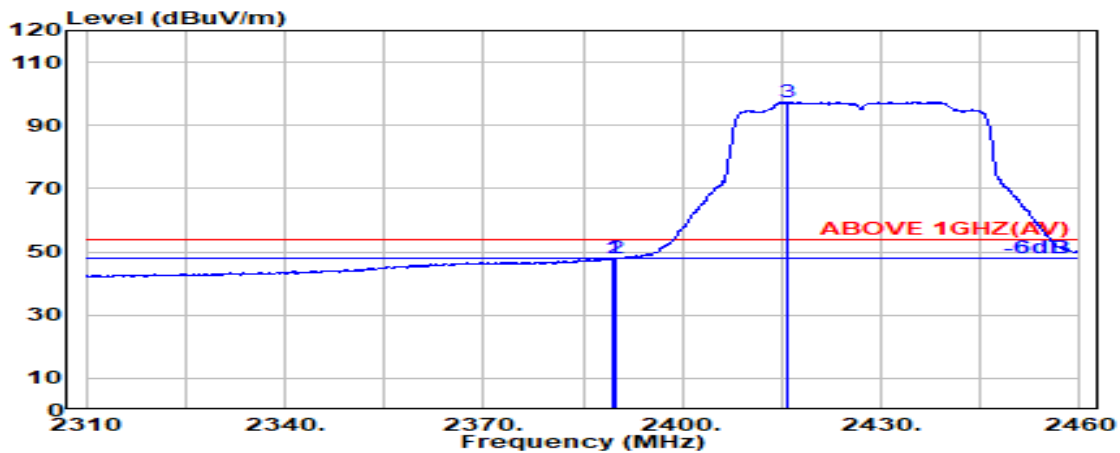


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.93	54.14	48.07	54.00	5.93	Average
2390.000	28.14	5.72	39.93	54.08	48.01	54.00	5.99	Average
@ 2415.800	28.16	5.75	39.93	103.44	97.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	Frequency	TX 2427MHz
------	---------------	-----------	------------

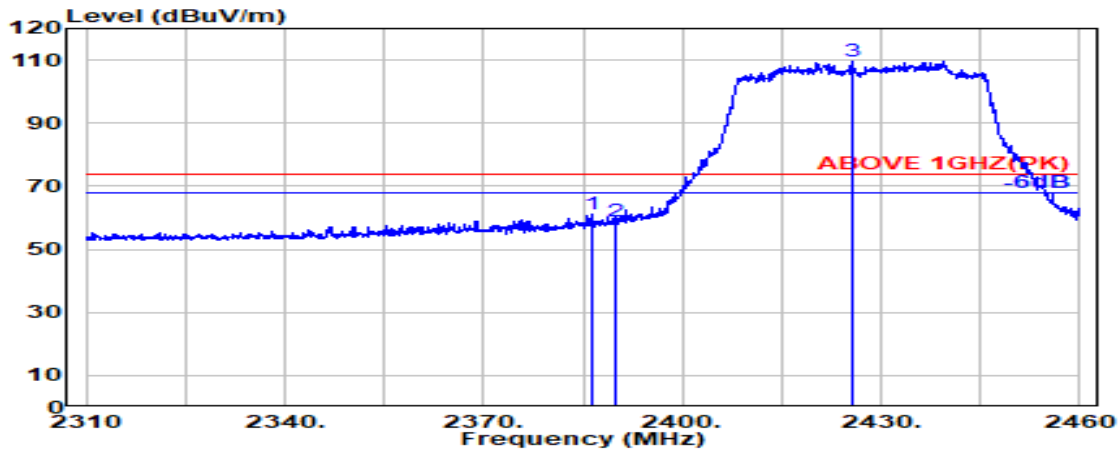

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.200	28.15	5.72	39.93	67.31	61.25	74.00	12.75	Peak
2390.000	28.14	5.72	39.93	65.06	58.99	74.00	15.01	Peak
@ 2425.600	28.20	5.76	39.93	115.77	109.81	---	---	Peak

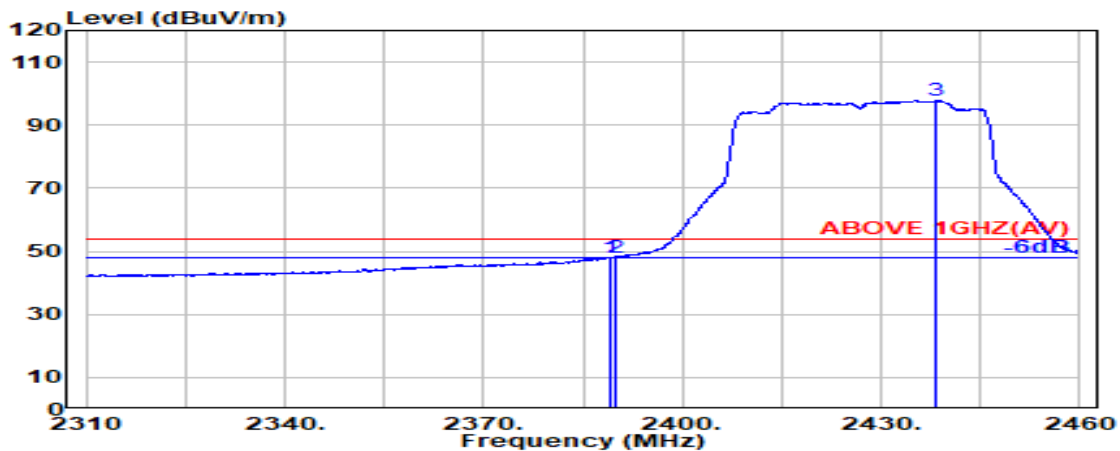


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.93	54.17	48.11	54.00	5.89	Average
2390.000	28.14	5.72	39.93	54.16	48.09	54.00	5.91	Average
@ 2438.400	28.25	5.78	39.92	103.89	98.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

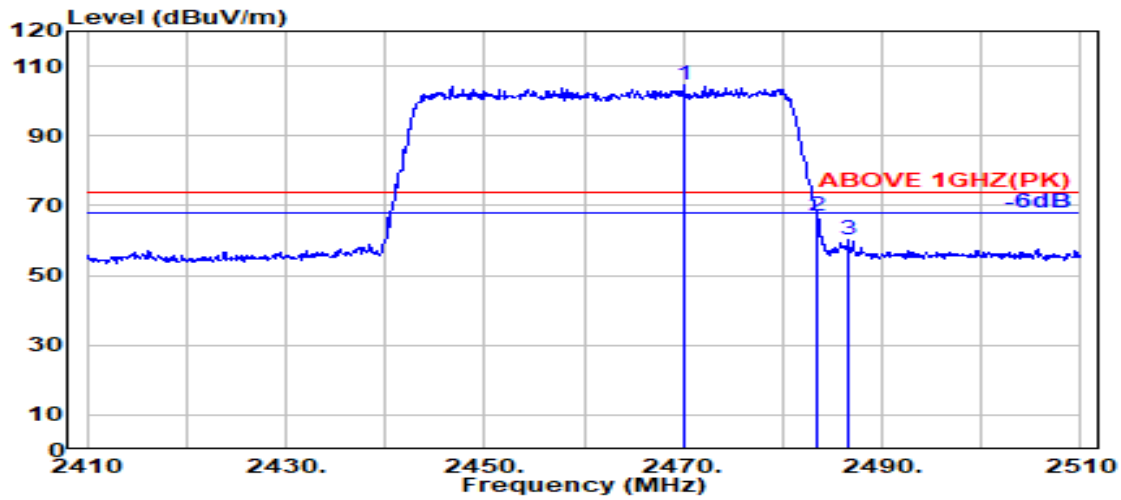

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	28.34	5.82	39.92	110.18	104.42	---	---	Peak
2483.500	28.37	5.83	39.92	72.67	66.95	74.00	7.05	Peak
2486.600	28.37	5.83	39.92	66.13	60.42	74.00	13.58	Peak

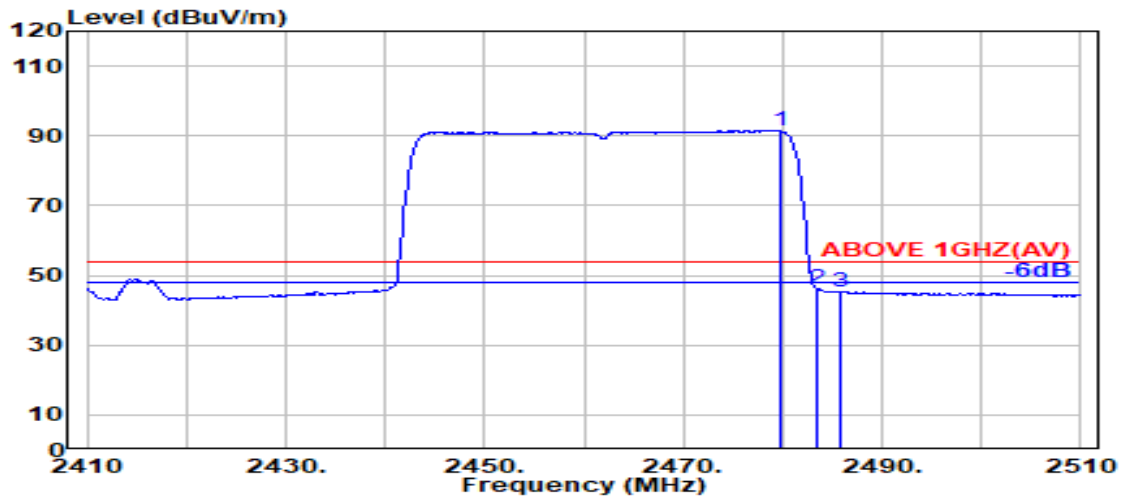


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	28.36	5.83	39.92	97.28	91.55	---	---	Average
2483.500	28.37	5.83	39.92	51.87	46.14	54.00	7.86	Average
2485.700	28.37	5.83	39.92	51.17	45.45	54.00	8.55	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

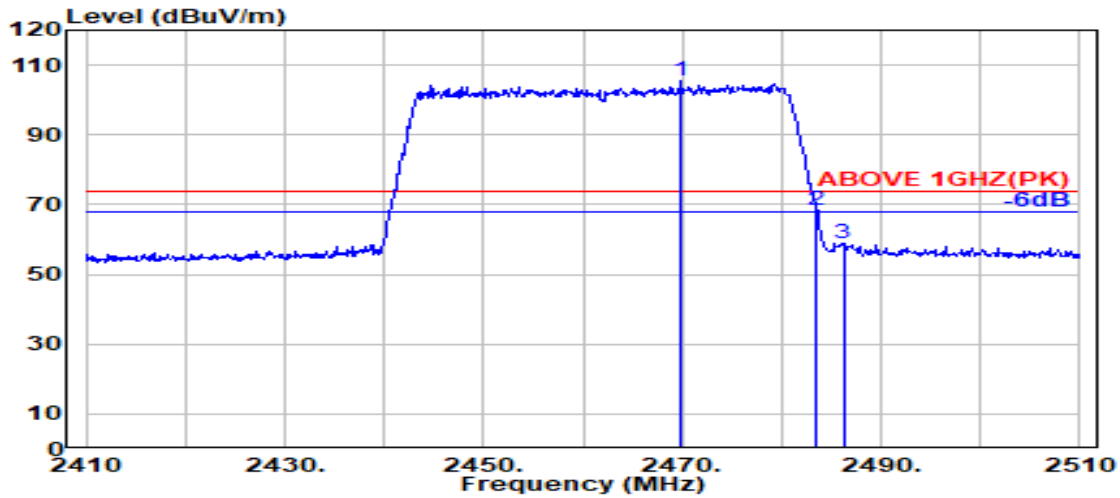

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.800	28.34	5.82	39.92	111.41	105.64	---	---	Peak
2483.500	28.37	5.83	39.92	74.12	68.40	74.00	5.60	Peak
2486.200	28.37	5.83	39.92	64.77	59.06	74.00	14.94	Peak

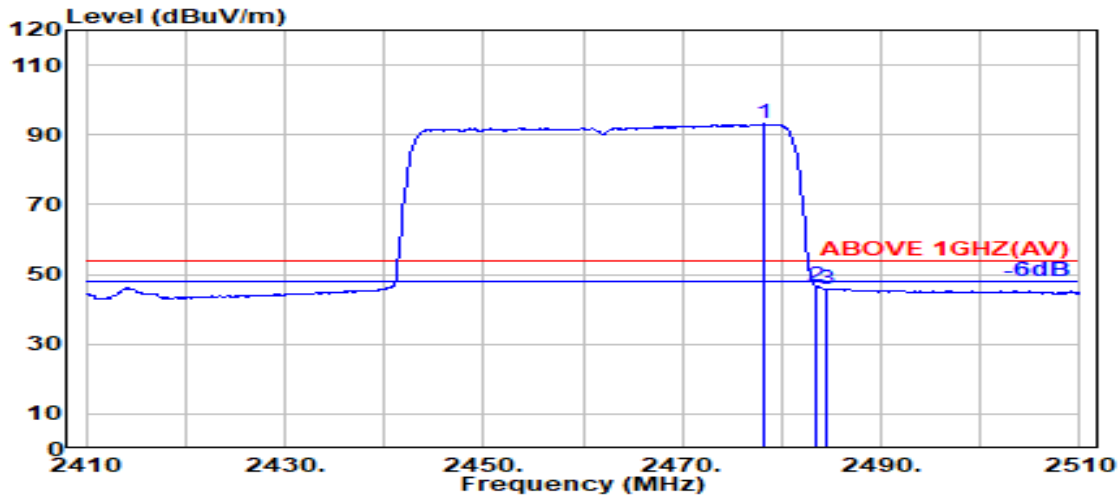


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.100	28.36	5.82	39.92	98.80	93.06	---	---	Average
2483.500	28.37	5.83	39.92	52.43	46.70	54.00	7.30	Average
2484.400	28.37	5.83	39.92	51.65	45.93	54.00	8.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

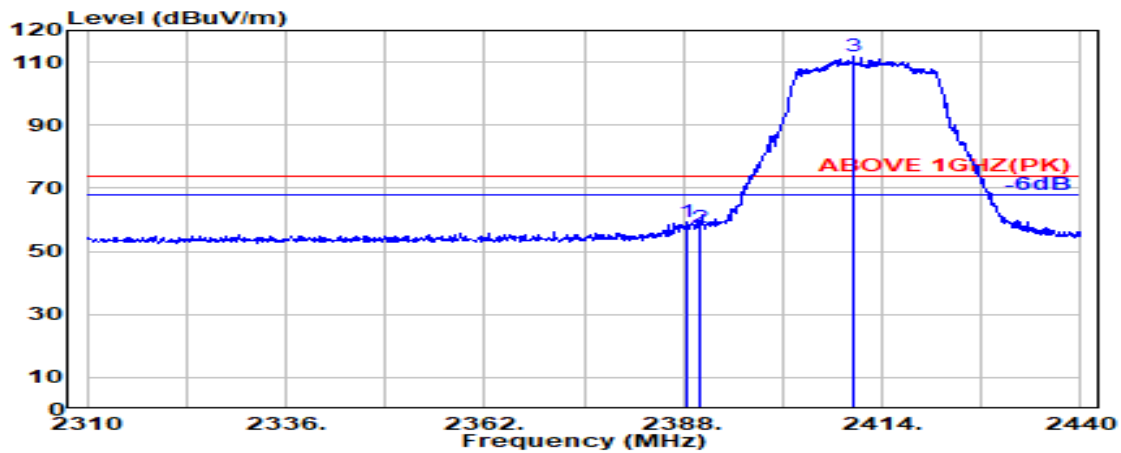

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.15	5.72	39.93	65.20	59.14	74.00	14.86	Peak
2390.000	28.14	5.72	39.93	63.65	57.58	74.00	16.42	Peak
@ 2410.200	28.14	5.75	39.93	117.76	111.72	---	---	Peak

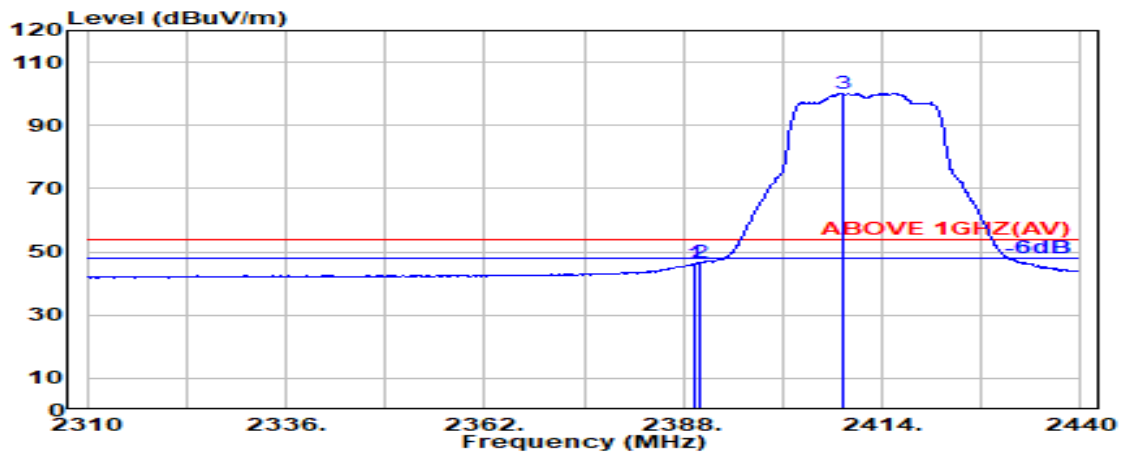


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.93	52.31	46.24	54.00	7.76	Average
2390.000	28.14	5.72	39.93	52.49	46.43	54.00	7.57	Average
@ 2408.900	28.14	5.74	39.93	106.18	100.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

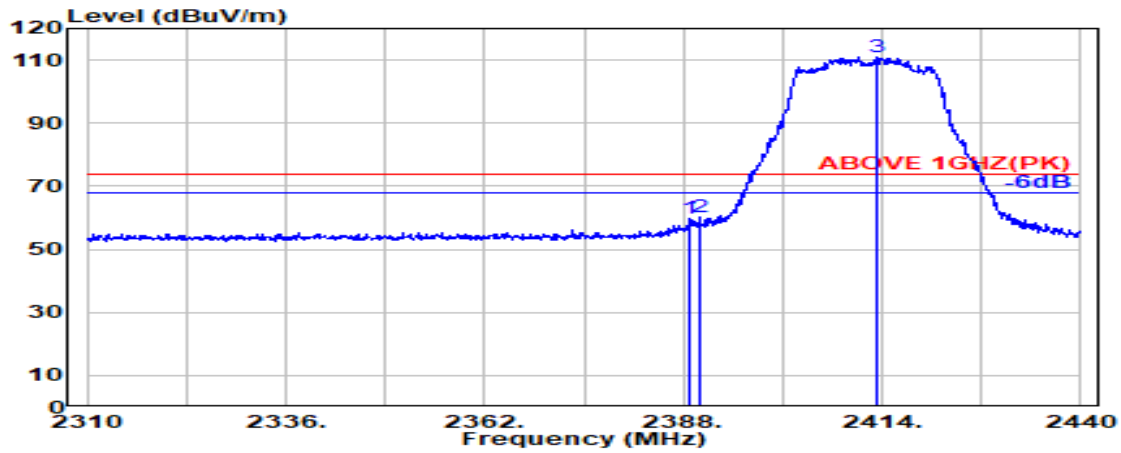

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.14	5.72	39.93	65.72	59.66	74.00	14.34	Peak
2390.000	28.14	5.72	39.93	66.09	60.03	74.00	13.97	Peak
@ 2413.400	28.15	5.75	39.93	117.13	111.11	---	---	Peak

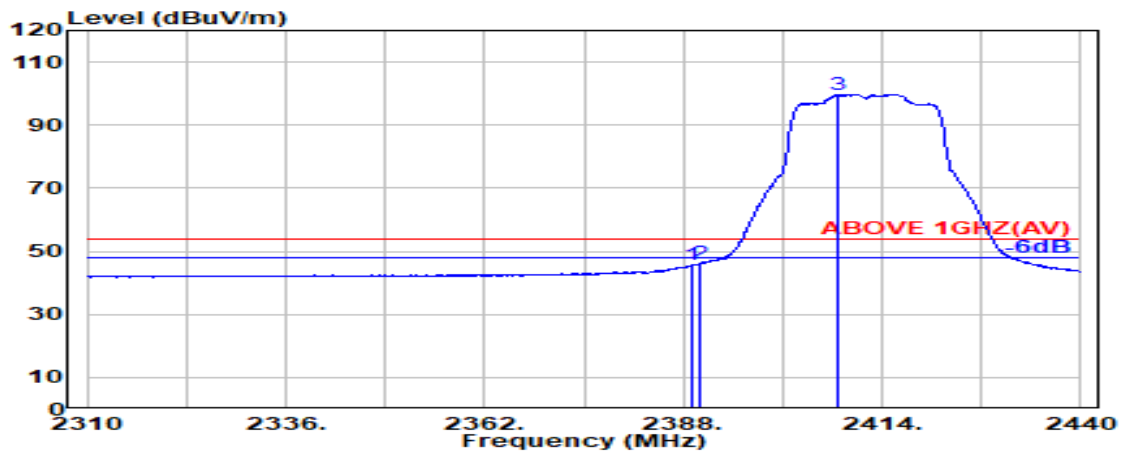


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.93	52.01	45.94	54.00	8.06	Average
2390.000	28.14	5.72	39.93	52.26	46.19	54.00	7.81	Average
@ 2408.200	28.13	5.74	39.93	105.80	99.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

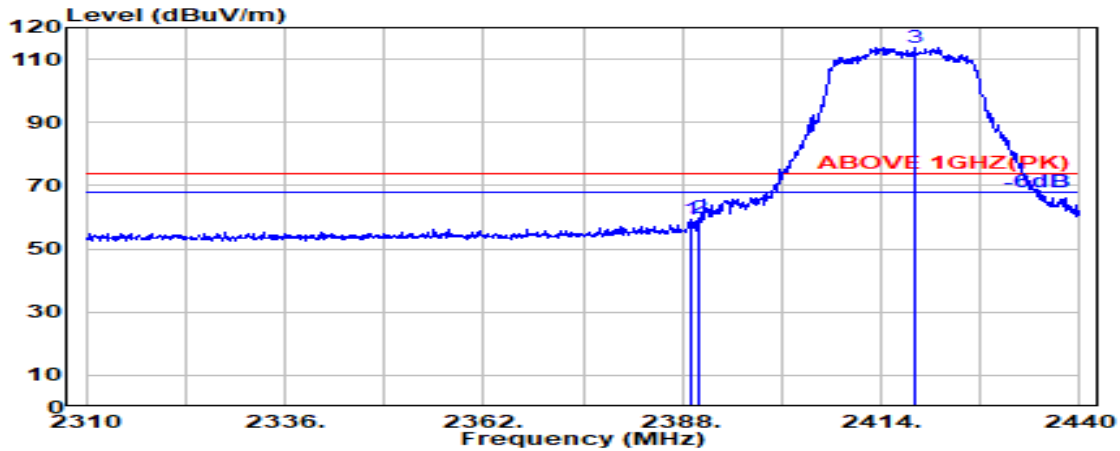

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.93	65.31	59.25	74.00	14.75	Peak
2390.000	28.14	5.72	39.93	65.79	59.72	74.00	14.28	Peak
@ 2418.300	28.17	5.75	39.93	119.81	113.81	---	---	Peak

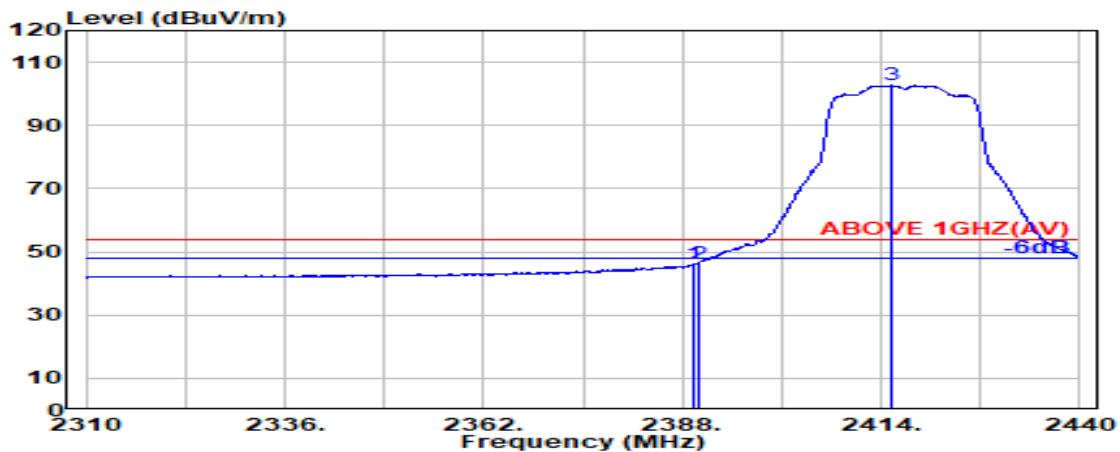


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.93	52.21	46.15	54.00	7.85	Average
2390.000	28.14	5.72	39.93	52.30	46.23	54.00	7.77	Average
@ 2415.300	28.16	5.75	39.93	108.71	102.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

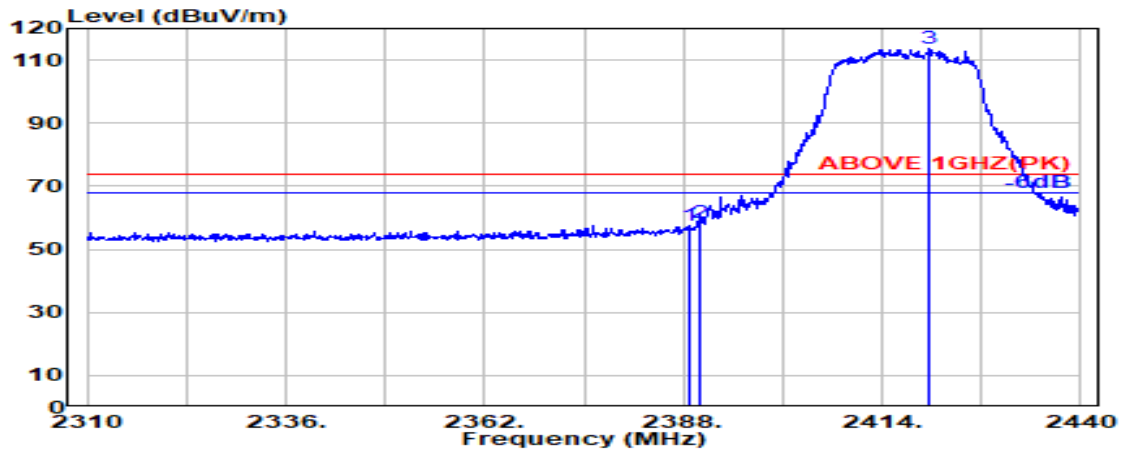

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.700	28.14	5.72	39.93	63.77	57.71	74.00	16.29	Peak
2390.000	28.14	5.72	39.93	64.29	58.23	74.00	15.77	Peak
@ 2420.200	28.18	5.76	39.93	119.79	113.80	---	---	Peak

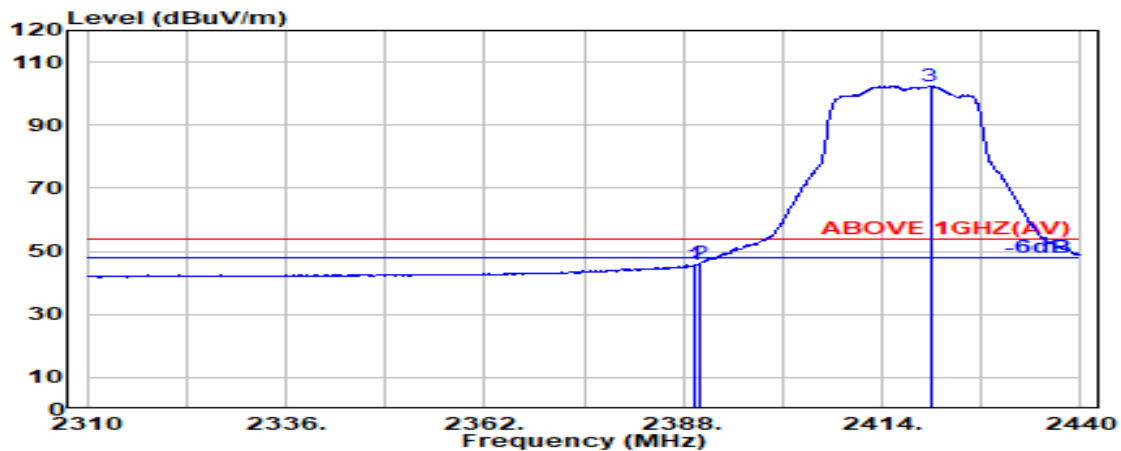


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.93	51.84	45.78	54.00	8.22	Average
2390.000	28.14	5.72	39.93	52.14	46.07	54.00	7.93	Average
@ 2420.300	28.18	5.76	39.93	108.53	102.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

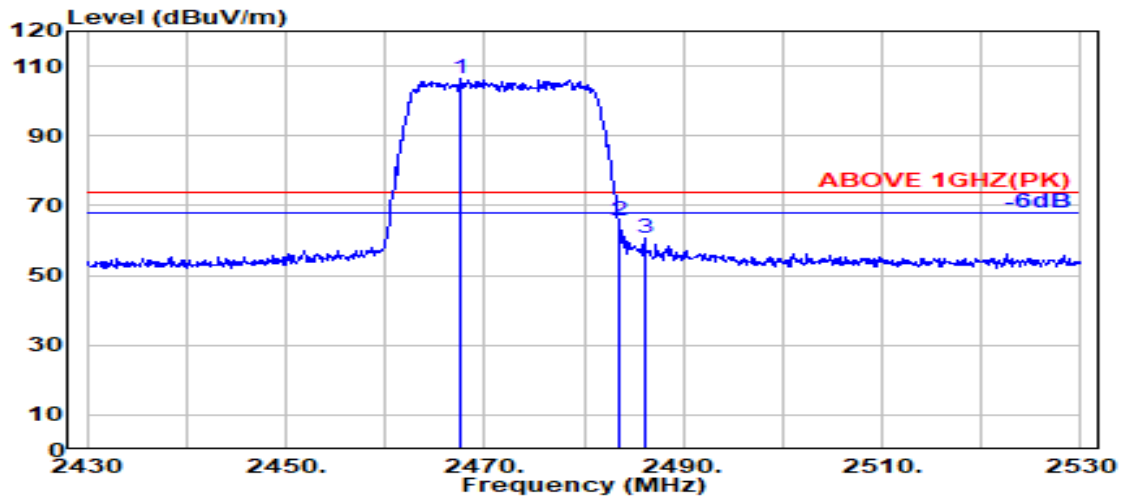

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.34	5.81	39.92	111.98	106.21	---	---	Peak
2483.500	28.37	5.83	39.92	71.40	65.68	74.00	8.32	Peak
2486.100	28.37	5.83	39.92	66.26	60.55	74.00	13.45	Peak

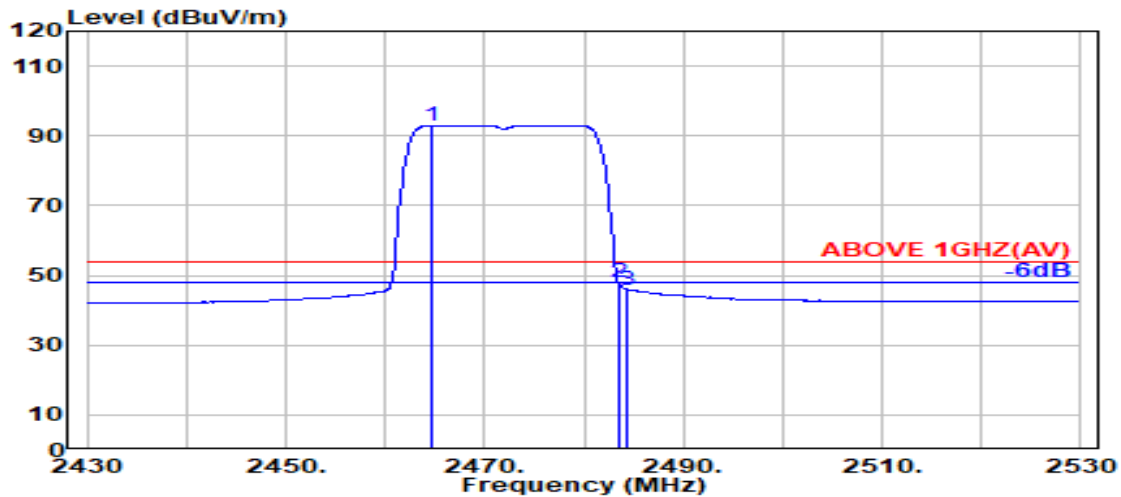


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.33	5.81	39.92	98.83	93.05	---	---	Average
2483.500	28.37	5.83	39.92	53.62	47.89	54.00	6.11	Average
2484.400	28.37	5.83	39.92	51.65	45.93	54.00	8.07	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.




Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

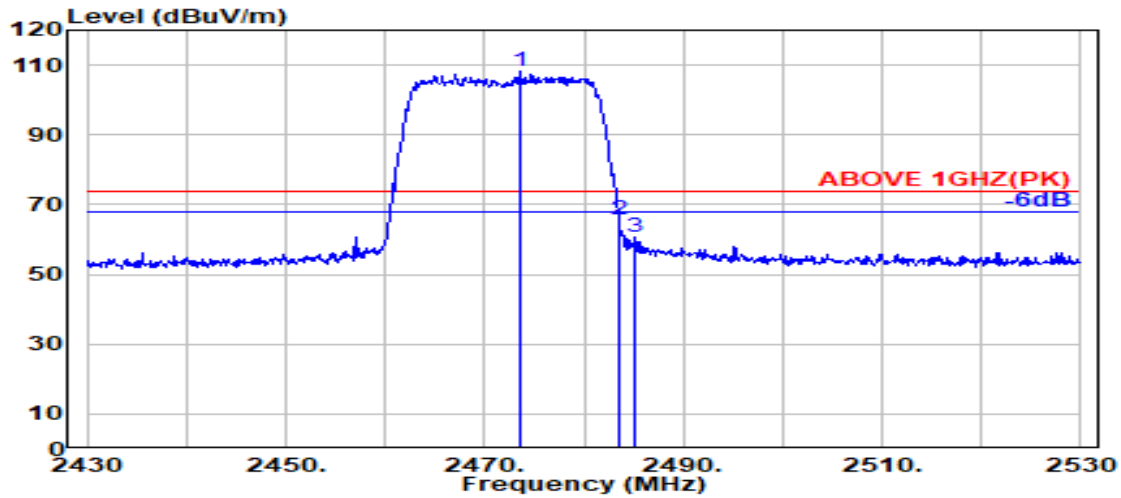

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.500	28.35	5.82	39.92	113.77	108.01	---	---	Peak
2483.500	28.37	5.83	39.92	71.59	65.87	74.00	8.13	Peak
2485.100	28.37	5.83	39.92	66.23	60.51	74.00	13.49	Peak

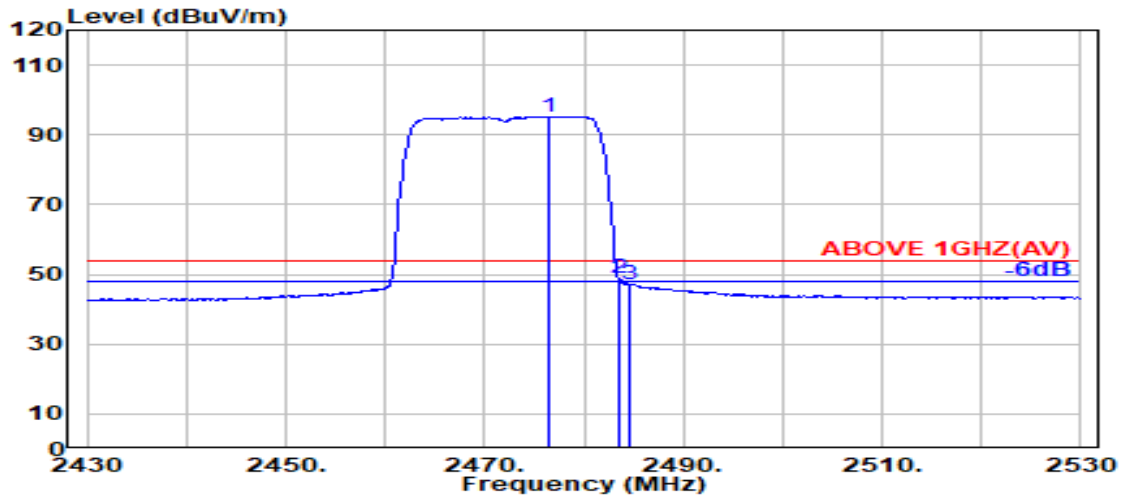


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.35	5.82	39.92	101.02	95.28	---	---	Average
2483.500	28.37	5.83	39.92	54.73	49.01	54.00	4.99	Average
2484.600	28.37	5.83	39.92	52.96	47.24	54.00	6.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

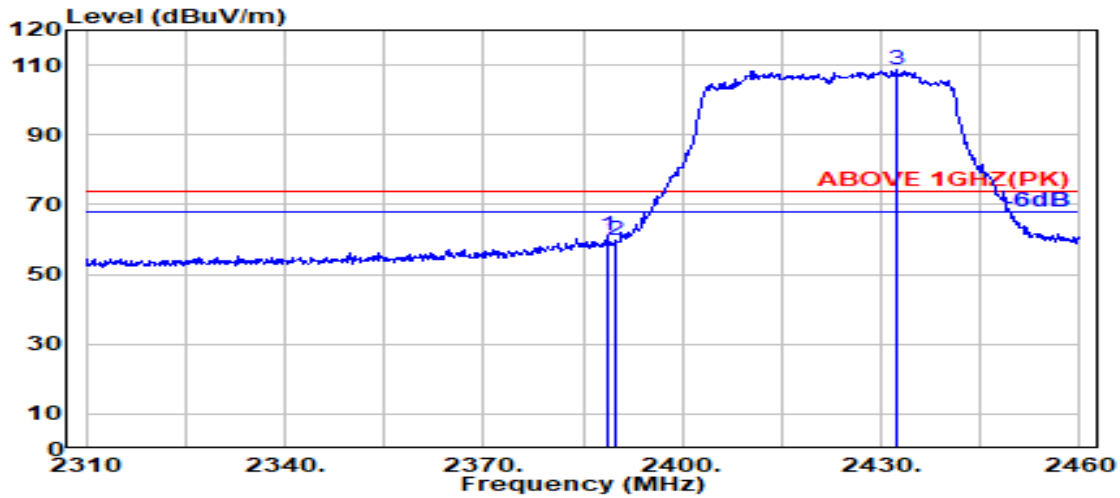

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.93	67.01	60.94	74.00	13.06	Peak
2390.000	28.14	5.72	39.93	65.95	59.88	74.00	14.12	Peak
@ 2432.250	28.23	5.77	39.92	114.62	108.70	---	---	Peak

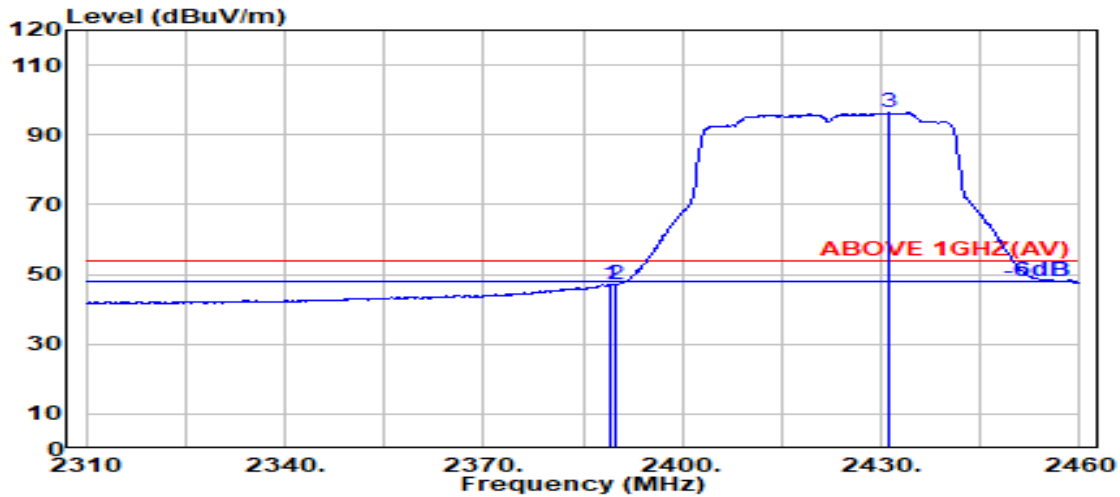


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.93	53.21	47.15	54.00	6.85	Average
2390.000	28.14	5.72	39.93	53.10	47.03	54.00	6.97	Average
@ 2431.050	28.22	5.77	39.93	102.33	96.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

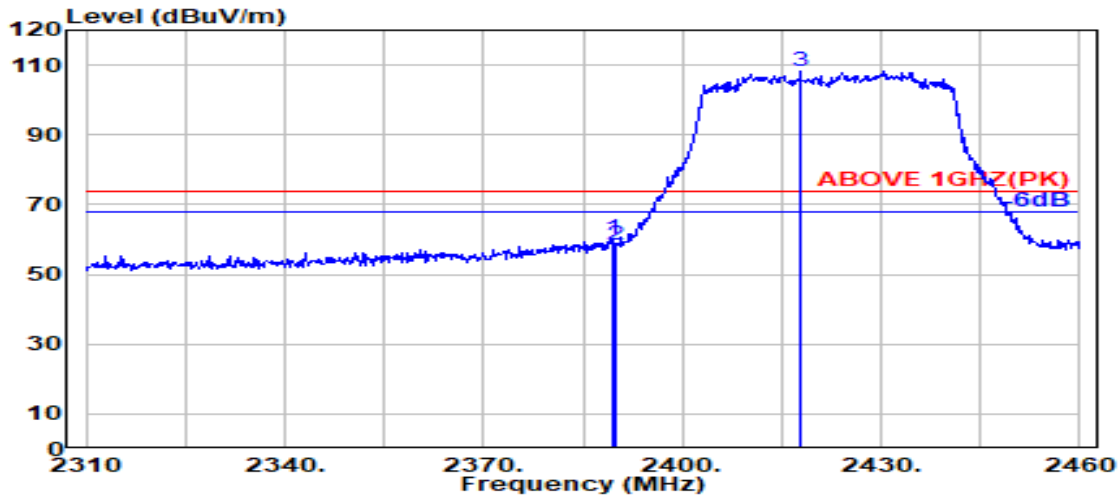

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.93	66.14	60.07	74.00	13.93	Peak
2390.000	28.14	5.72	39.93	64.45	58.39	74.00	15.61	Peak
@ 2417.850	28.17	5.75	39.93	114.41	108.41	---	---	Peak

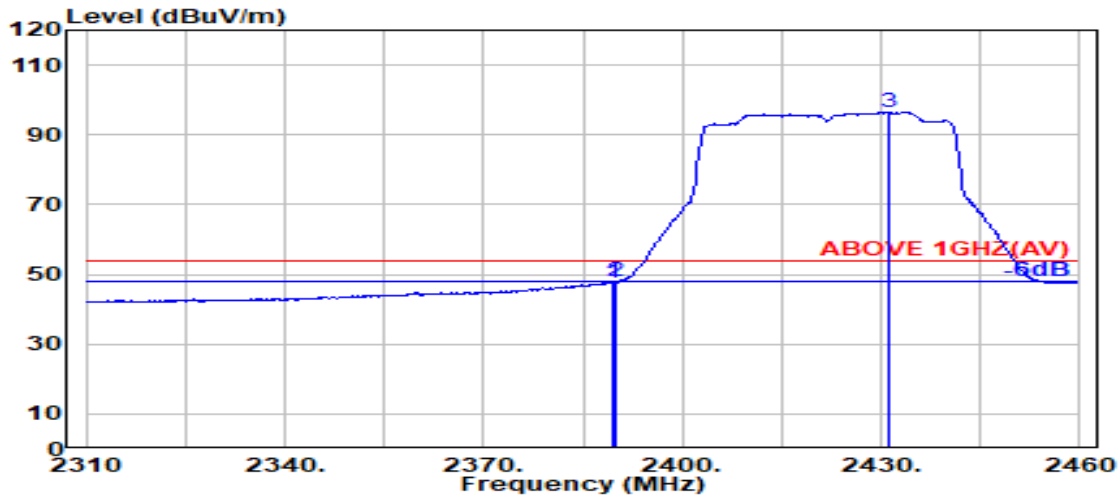


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.93	53.67	47.61	54.00	6.39	Average
2390.000	28.14	5.72	39.93	53.94	47.87	54.00	6.13	Average
@ 2431.350	28.23	5.77	39.92	102.50	96.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

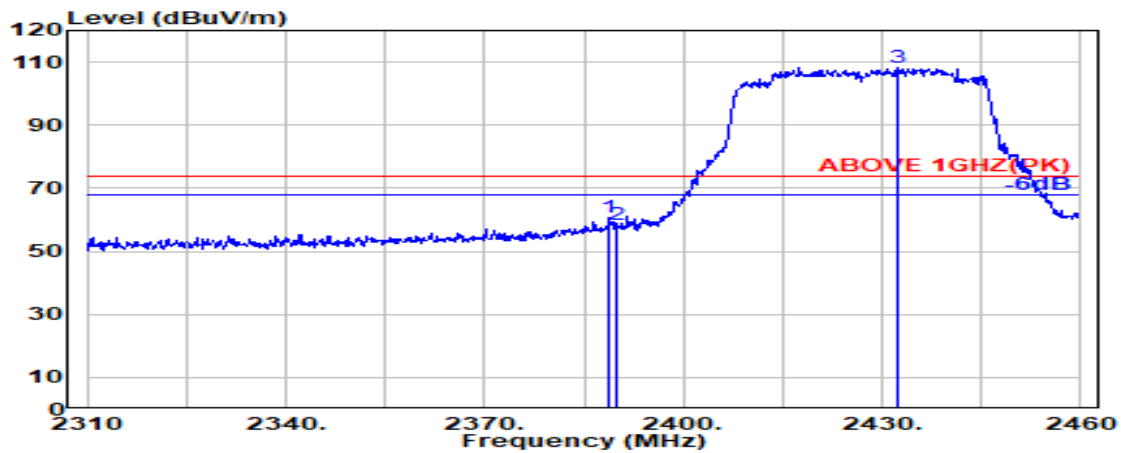

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.93	66.75	60.69	74.00	13.31	Peak
2390.000	28.14	5.72	39.93	64.40	58.33	74.00	15.67	Peak
@ 2432.250	28.23	5.77	39.92	114.13	108.20	---	---	Peak

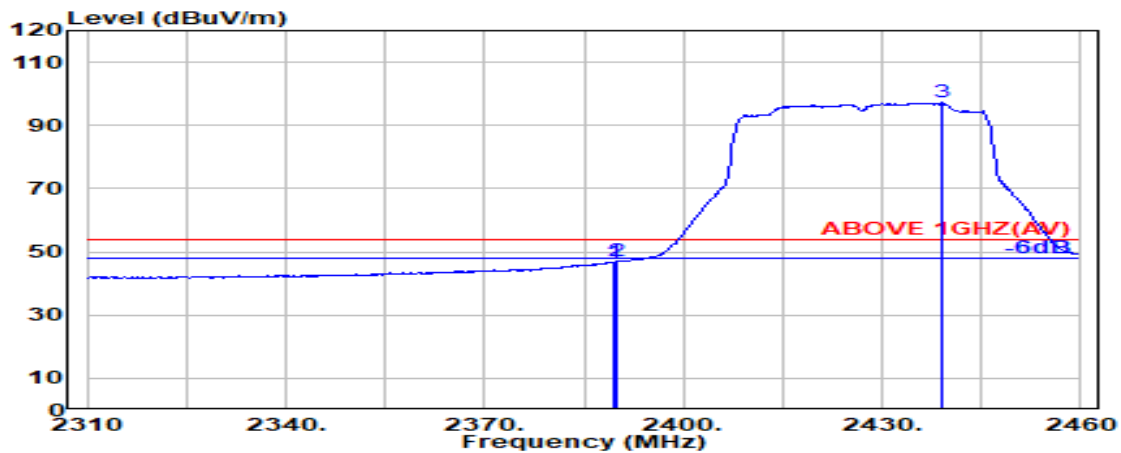


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.93	52.88	46.81	54.00	7.19	Average
2390.000	28.14	5.72	39.93	53.28	47.21	54.00	6.79	Average
@ 2439.150	28.26	5.78	39.92	103.07	97.19	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2427MHz
------	----------------	-----------	------------

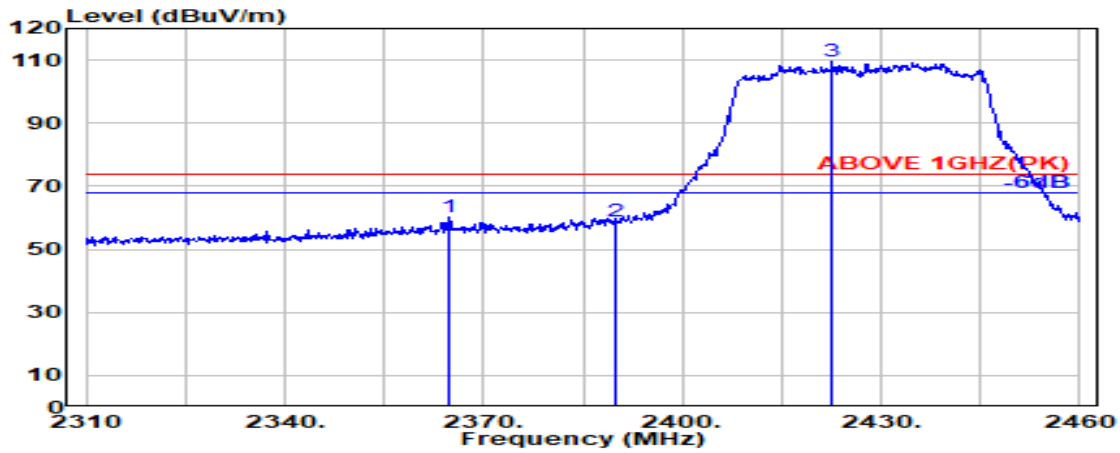

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2364.600	28.24	5.69	39.93	66.18	60.18	74.00	13.82	Peak
2390.000	28.14	5.72	39.93	65.00	58.93	74.00	15.07	Peak
@ 2422.650	28.19	5.76	39.93	115.62	109.65	---	---	Peak

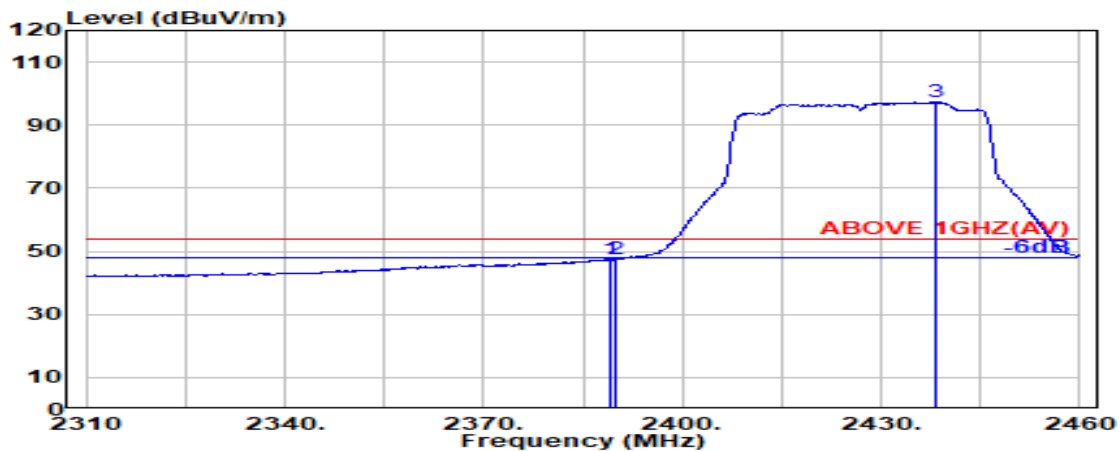


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.93	53.59	47.52	54.00	6.48	Average
2390.000	28.14	5.72	39.93	53.61	47.54	54.00	6.46	Average
@ 2438.250	28.25	5.78	39.92	103.31	97.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

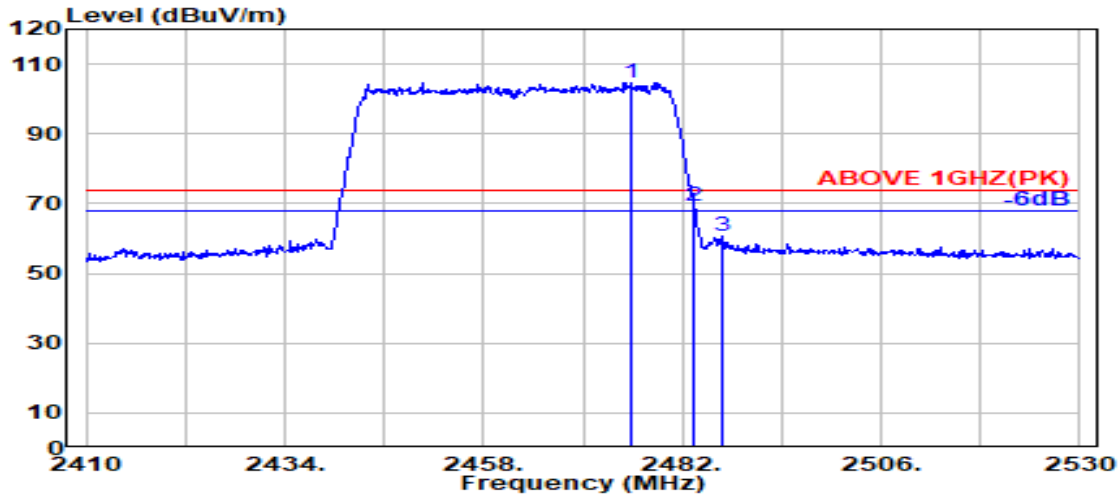

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.760	28.35	5.82	39.92	110.41	104.66	---	---	Peak
2483.500	28.37	5.83	39.92	74.84	69.12	74.00	4.88	Peak
2486.680	28.37	5.83	39.92	66.33	60.61	74.00	13.39	Peak

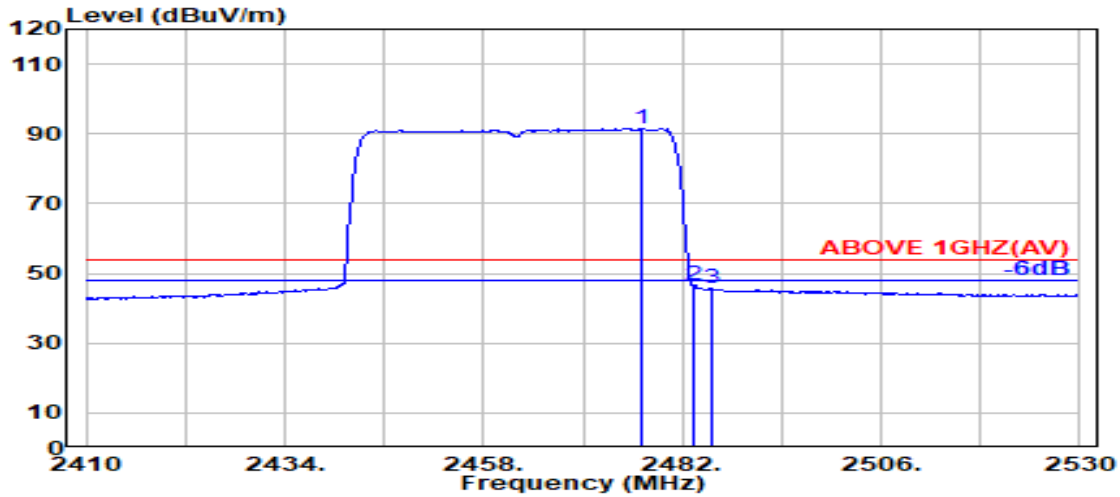


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.200	28.35	5.82	39.92	97.15	91.41	---	---	Average
2483.500	28.37	5.83	39.92	52.32	46.60	54.00	7.40	Average
2485.600	28.37	5.83	39.92	51.33	45.61	54.00	8.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

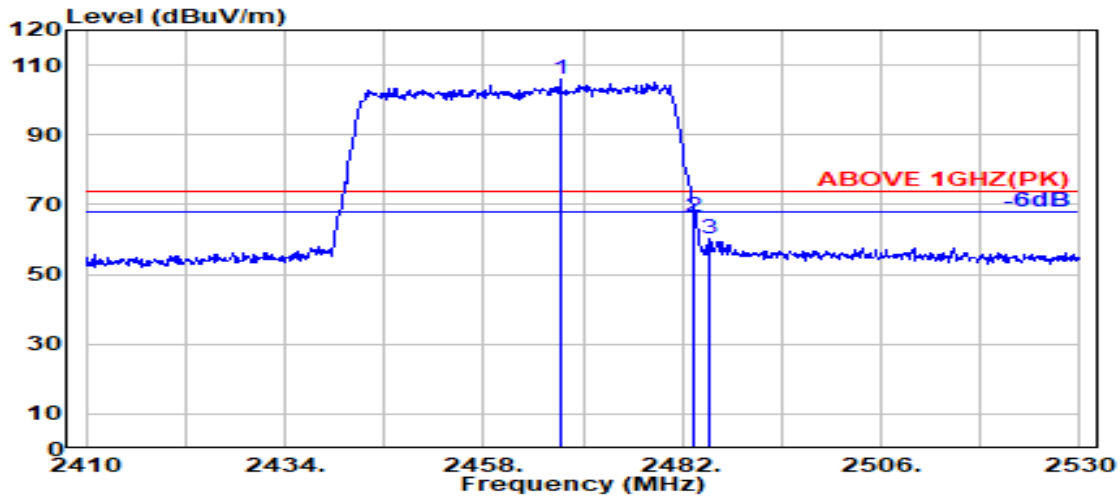

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.240	28.33	5.81	39.92	111.57	105.79	---	---	Peak
2483.500	28.37	5.83	39.92	72.19	66.46	74.00	7.54	Peak
2485.360	28.37	5.83	39.92	65.99	60.27	74.00	13.73	Peak

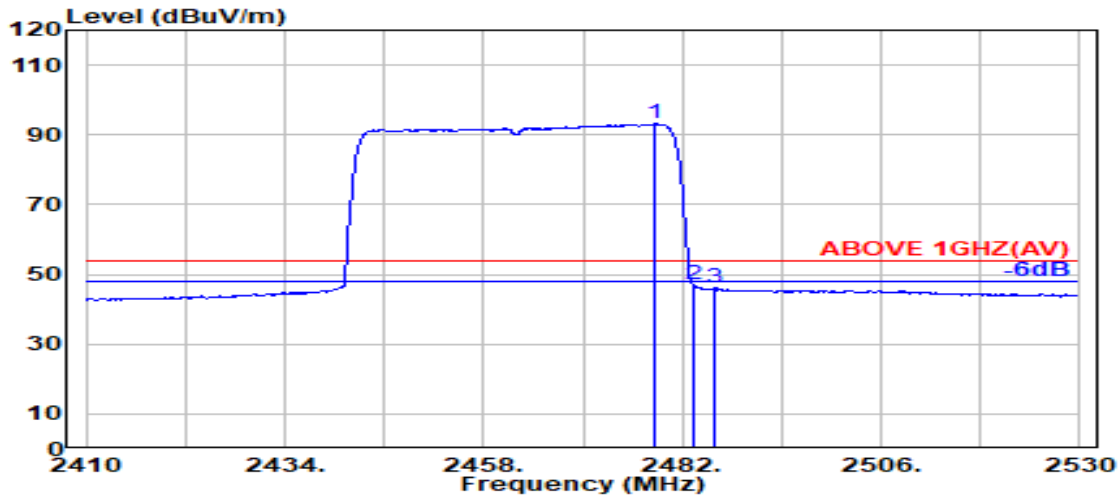


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.520	28.36	5.83	39.92	98.91	93.17	---	---	Average
2483.500	28.37	5.83	39.92	52.73	47.01	54.00	6.99	Average
2485.840	28.37	5.83	39.92	51.89	46.17	54.00	7.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

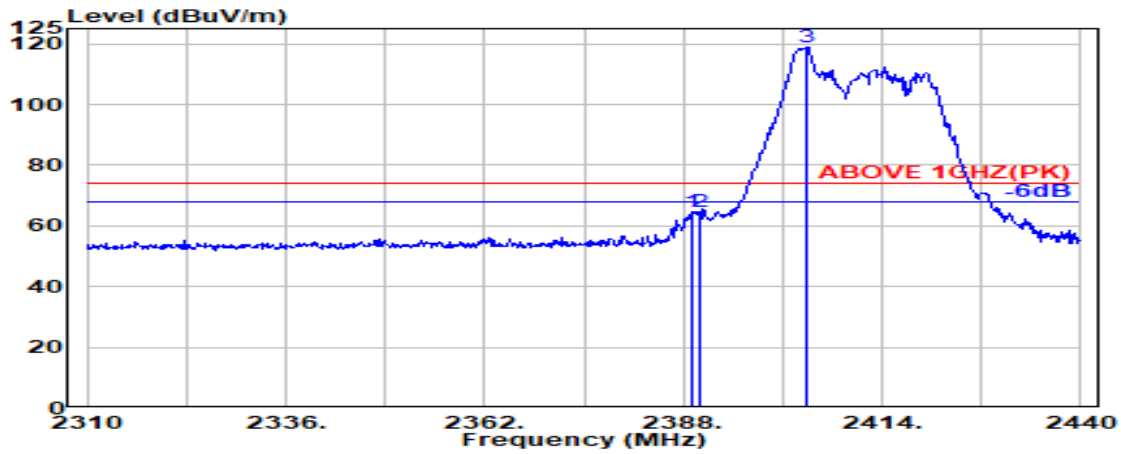

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.93	70.55	64.49	74.00	9.51	Peak
2390.000	28.14	5.72	39.93	70.61	64.54	74.00	9.46	Peak
@ 2403.990	28.12	5.74	39.93	124.78	118.70	---	---	Peak

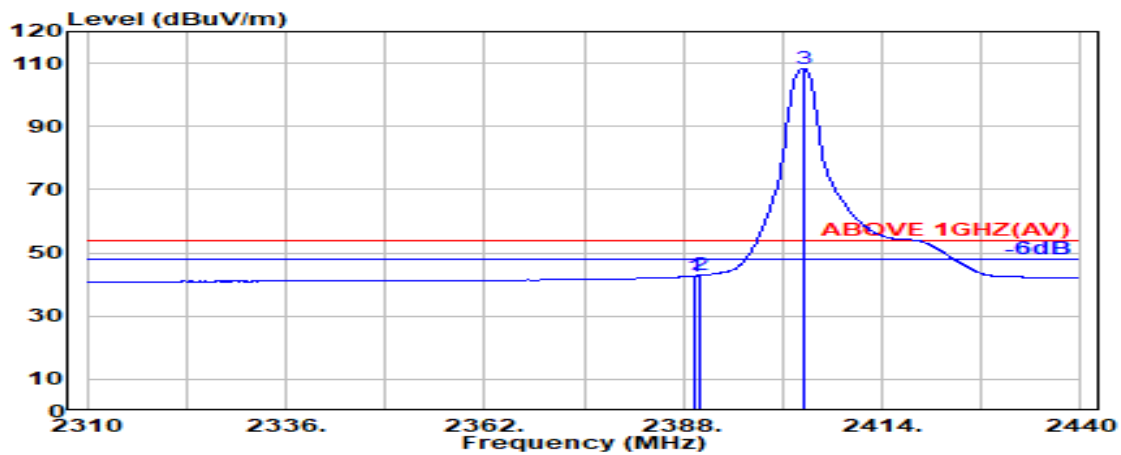


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.93	48.81	42.74	54.00	11.26	Average
2390.000	28.14	5.72	39.93	48.89	42.82	54.00	11.18	Average
@ 2403.730	28.12	5.74	39.93	114.39	108.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

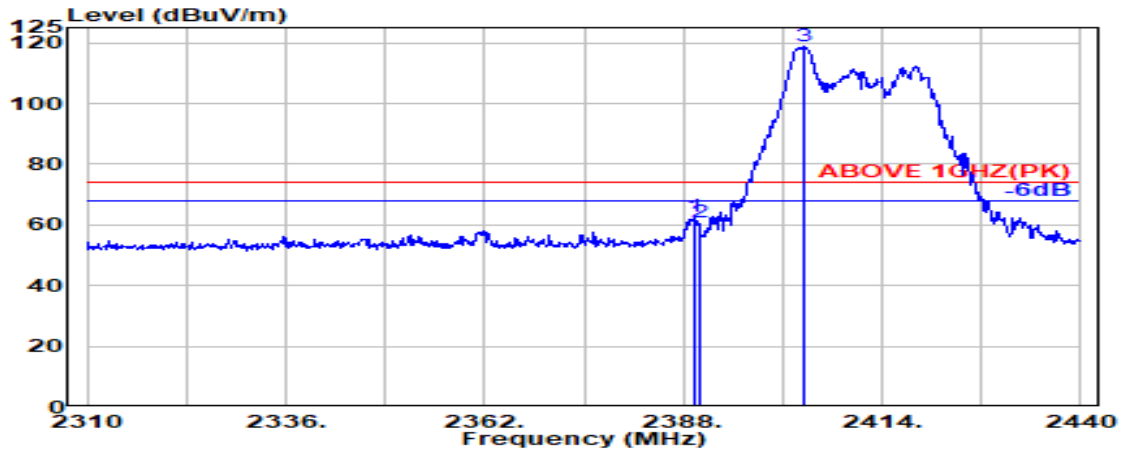

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.430	28.14	5.72	39.93	68.68	62.62	74.00	11.38	Peak
2390.000	28.14	5.72	39.93	66.71	60.65	74.00	13.35	Peak
@ 2403.860	28.12	5.74	39.93	124.72	118.65	---	---	Peak

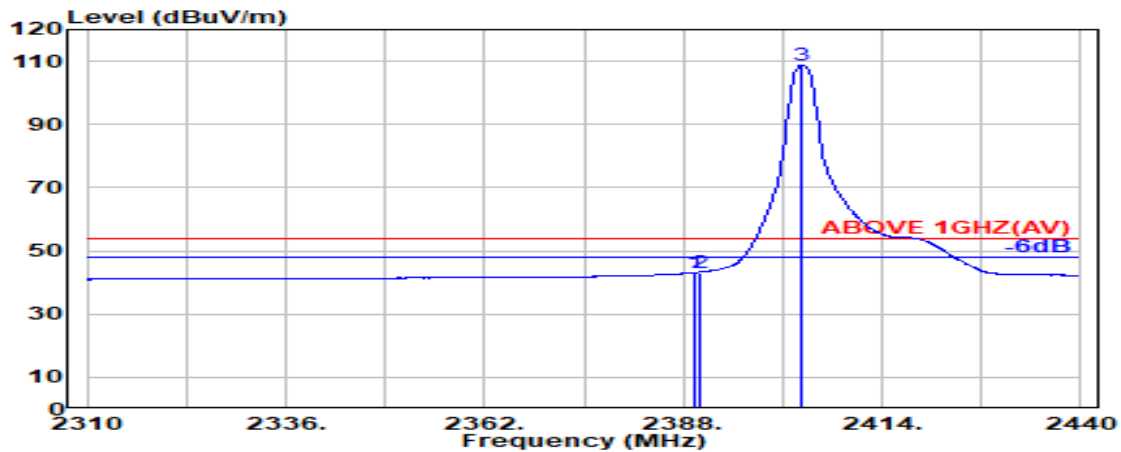


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.93	49.22	43.15	54.00	10.85	Average
2390.000	28.14	5.72	39.93	49.30	43.23	54.00	10.77	Average
@ 2403.470	28.11	5.74	39.93	114.79	108.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

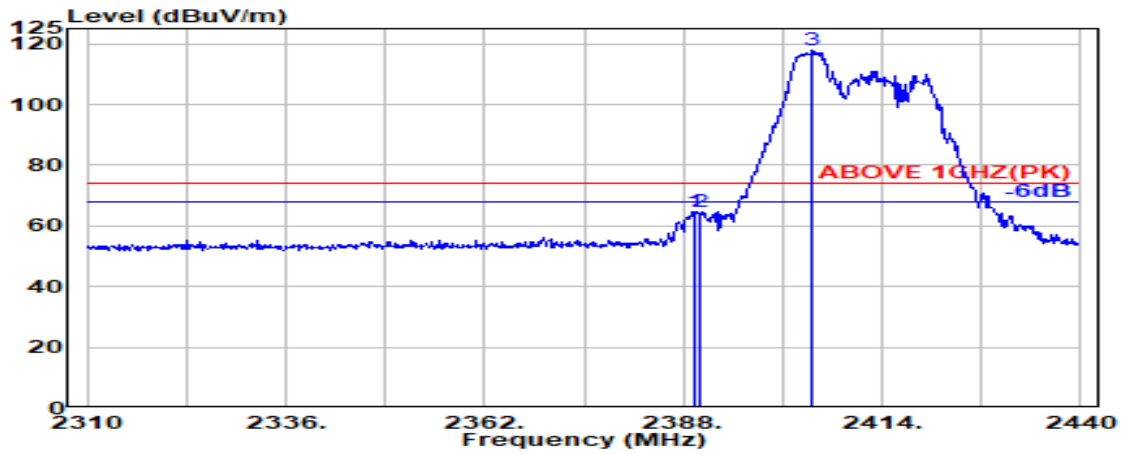

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.430	28.14	5.72	39.93	70.82	64.75	74.00	9.25	Peak
2390.000	28.14	5.72	39.93	70.52	64.45	74.00	9.55	Peak
@ 2404.900	28.12	5.74	39.93	123.80	117.73	---	---	Peak

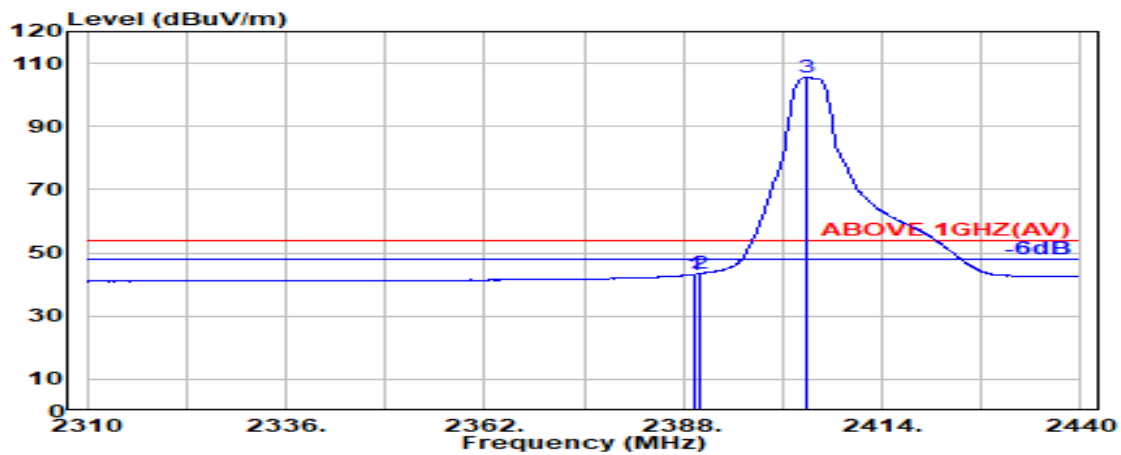


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.93	49.24	43.17	54.00	10.83	Average
2390.000	28.14	5.72	39.93	49.37	43.30	54.00	10.70	Average
@ 2404.120	28.12	5.74	39.93	111.57	105.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

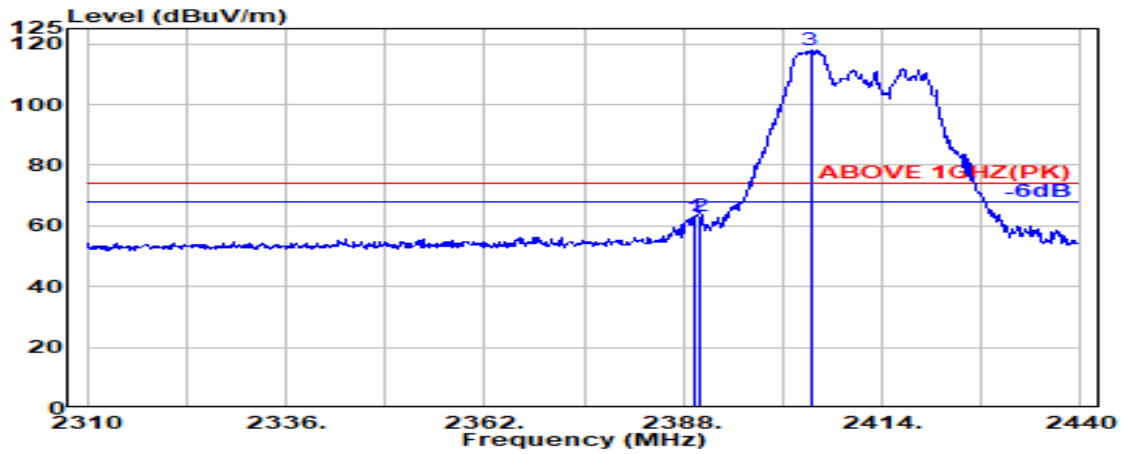

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.93	68.96	62.90	74.00	11.10	Peak
2390.000	28.14	5.72	39.93	69.24	63.17	74.00	10.83	Peak
@ 2404.640	28.12	5.74	39.93	123.88	117.81	---	---	Peak

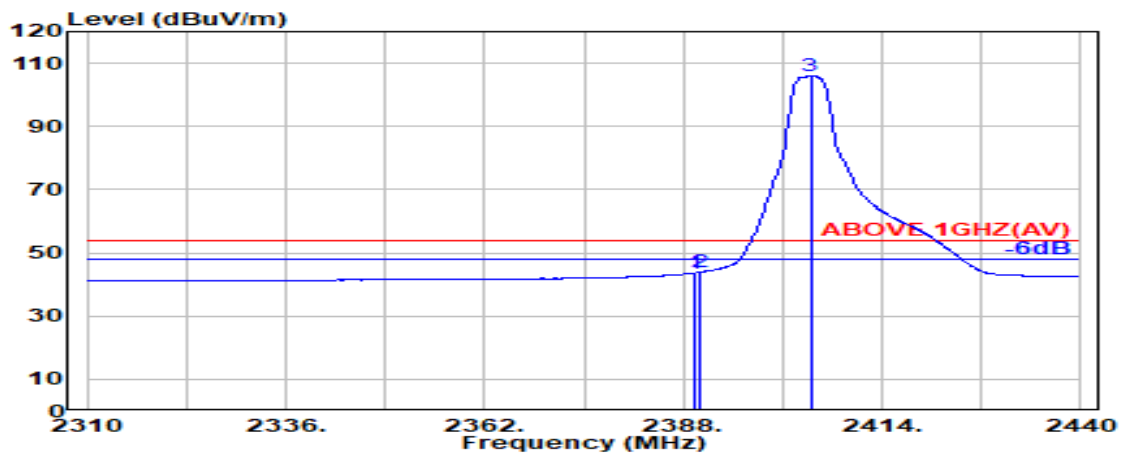


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.93	49.71	43.65	54.00	10.35	Average
2390.000	28.14	5.72	39.93	49.83	43.76	54.00	10.24	Average
@ 2404.640	28.12	5.74	39.93	112.05	105.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

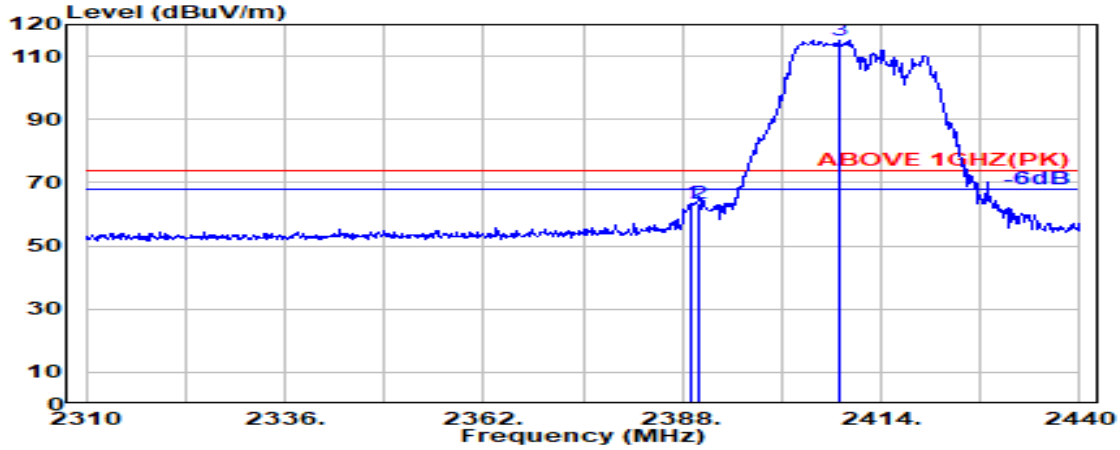

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.93	69.50	63.44	74.00	10.56	Peak
2390.000	28.14	5.72	39.93	69.38	63.31	74.00	10.69	Peak
@ 2408.670	28.13	5.74	39.93	121.17	115.12	---	---	Peak

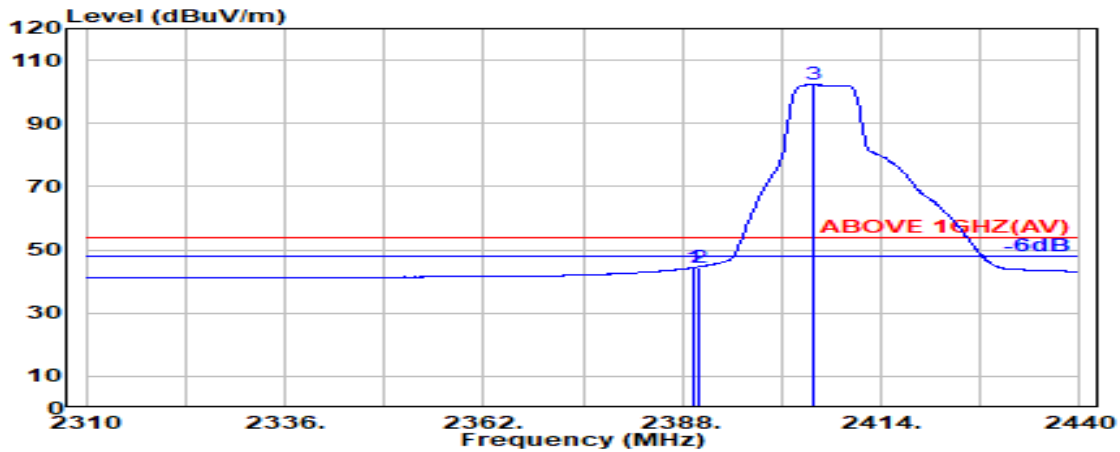


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.93	50.52	44.46	54.00	9.54	Average
2390.000	28.14	5.72	39.93	50.65	44.58	54.00	9.42	Average
@ 2405.030	28.12	5.74	39.93	108.29	102.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

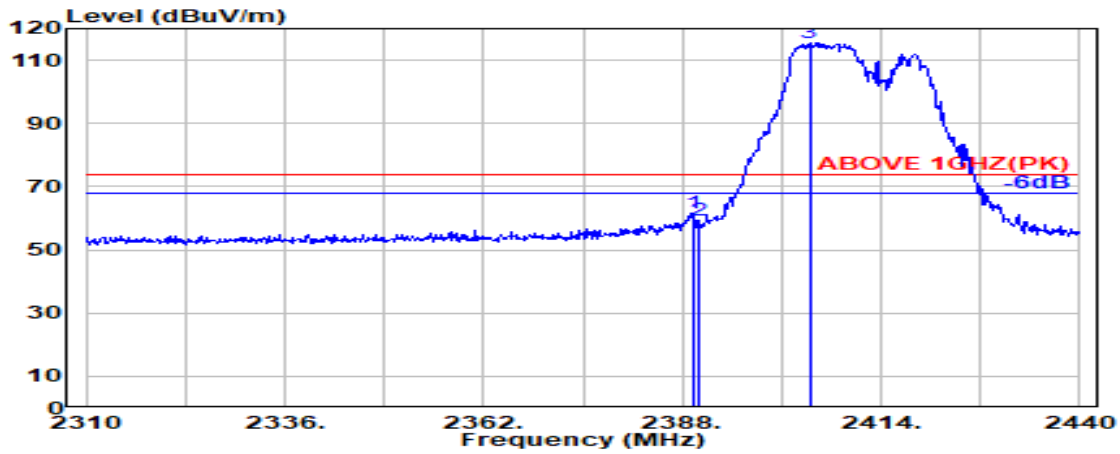

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.430	28.14	5.72	39.93	67.77	61.70	74.00	12.30	Peak
2390.000	28.14	5.72	39.93	65.38	59.31	74.00	14.69	Peak
@ 2404.640	28.12	5.74	39.93	121.49	115.42	---	---	Peak

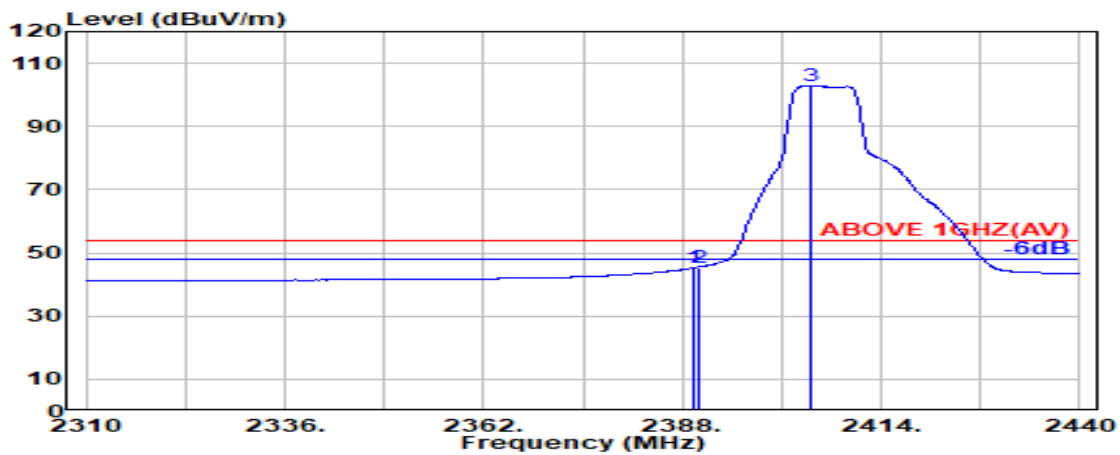


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.14	5.72	39.93	51.33	45.26	54.00	8.74	Average
2390.000	28.14	5.72	39.93	51.52	45.46	54.00	8.54	Average
@ 2404.900	28.12	5.74	39.93	109.02	102.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

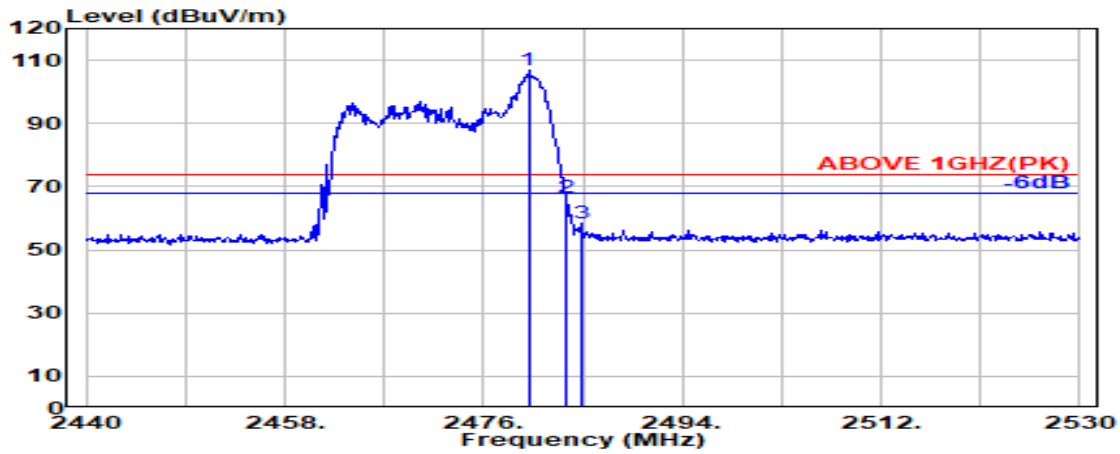

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.92	112.73	106.99	---	---	Peak
2483.500	28.37	5.83	39.92	72.24	66.52	74.00	7.48	Peak
2484.820	28.37	5.83	39.92	63.97	58.25	74.00	15.75	Peak

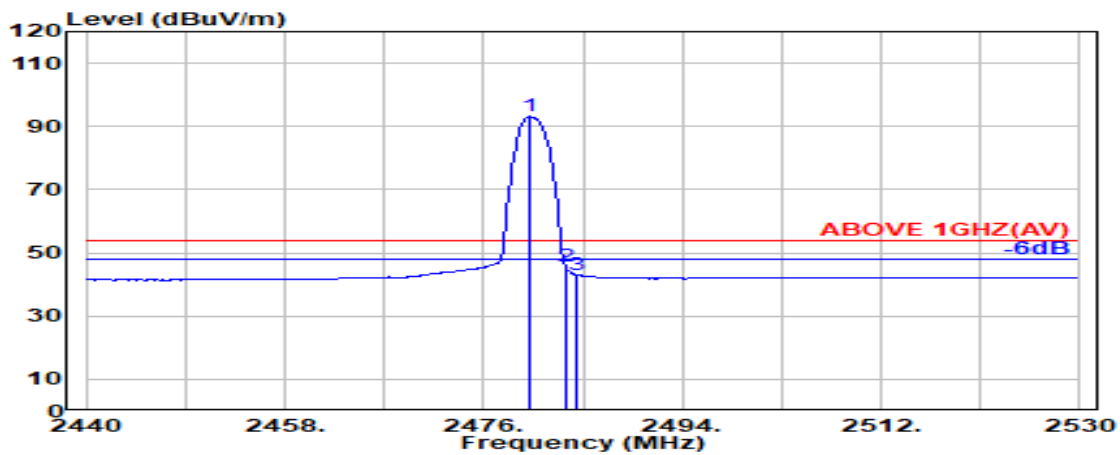


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.230	28.36	5.83	39.92	98.82	93.09	---	---	Average
2483.500	28.37	5.83	39.92	51.29	45.56	54.00	8.44	Average
2484.460	28.37	5.83	39.92	48.75	43.03	54.00	10.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

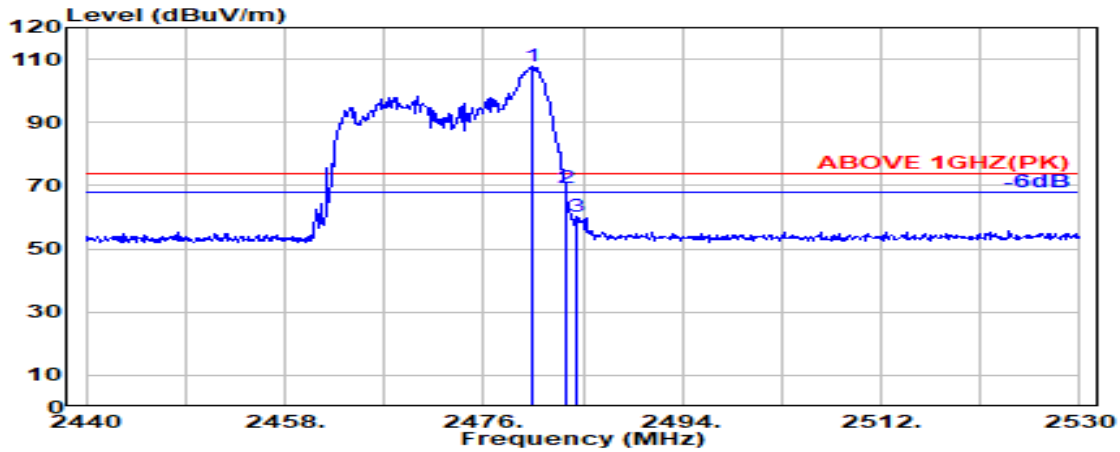

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.410	28.36	5.83	39.92	113.70	107.96	---	---	Peak
2483.500	28.37	5.83	39.92	75.22	69.49	74.00	4.51	Peak
2484.460	28.37	5.83	39.92	65.94	60.22	74.00	13.78	Peak

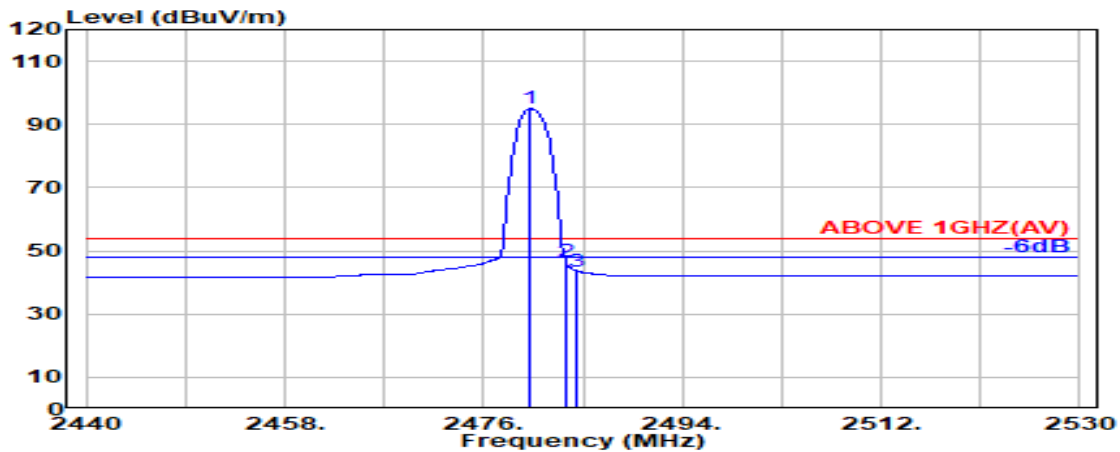


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.140	28.36	5.83	39.92	100.67	94.94	---	---	Average
2483.500	28.37	5.83	39.92	52.24	46.52	54.00	7.48	Average
2484.460	28.37	5.83	39.92	49.33	43.61	54.00	10.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

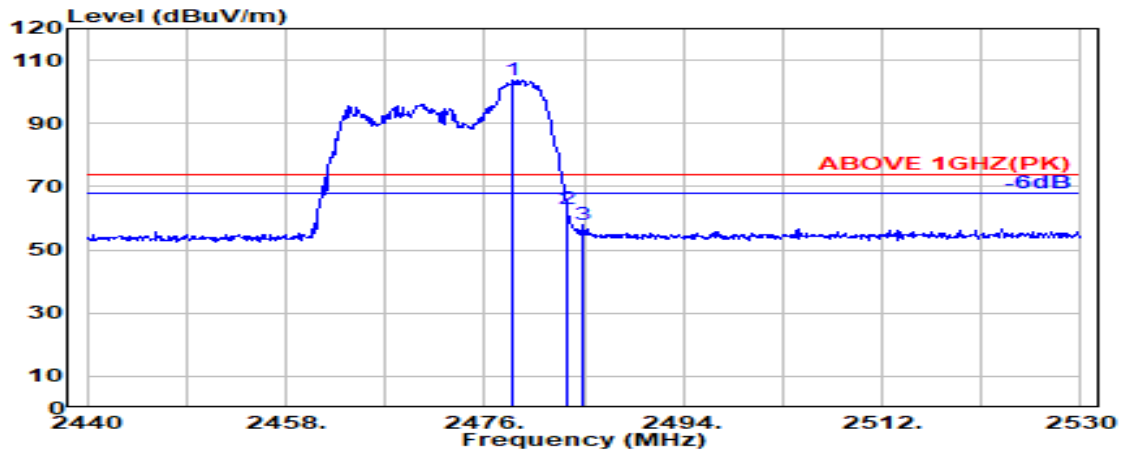

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.610	28.36	5.83	39.92	109.45	103.71	---	---	Peak
2483.500	28.37	5.83	39.92	68.86	63.13	74.00	10.87	Peak
2484.820	28.37	5.83	39.92	63.59	57.87	74.00	16.13	Peak

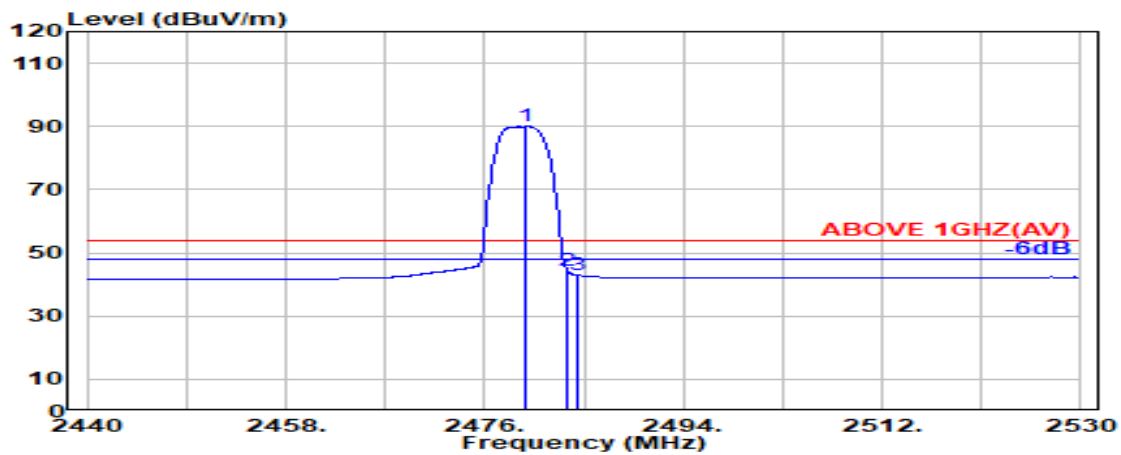


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.690	28.36	5.83	39.92	95.70	89.97	---	---	Average
2483.500	28.37	5.83	39.92	50.32	44.59	54.00	9.41	Average
2484.460	28.37	5.83	39.92	48.67	42.95	54.00	11.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

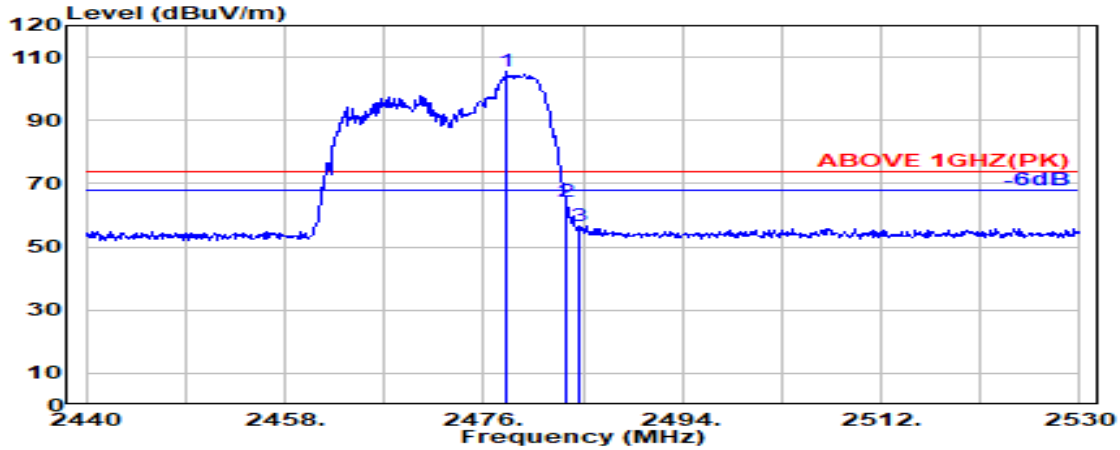

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.160	28.36	5.82	39.92	111.28	105.54	---	---	Peak
2483.500	28.37	5.83	39.92	70.09	64.37	74.00	9.63	Peak
2484.640	28.37	5.83	39.92	62.28	56.56	74.00	17.44	Peak

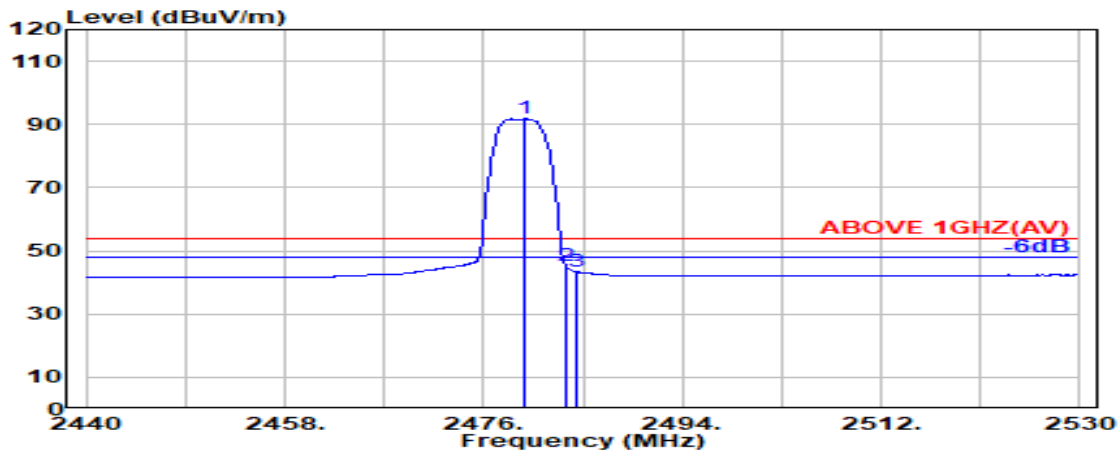


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.780	28.36	5.83	39.92	97.46	91.73	---	---	Average
2483.500	28.37	5.83	39.92	51.09	45.36	54.00	8.64	Average
2484.460	28.37	5.83	39.92	49.05	43.33	54.00	10.67	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

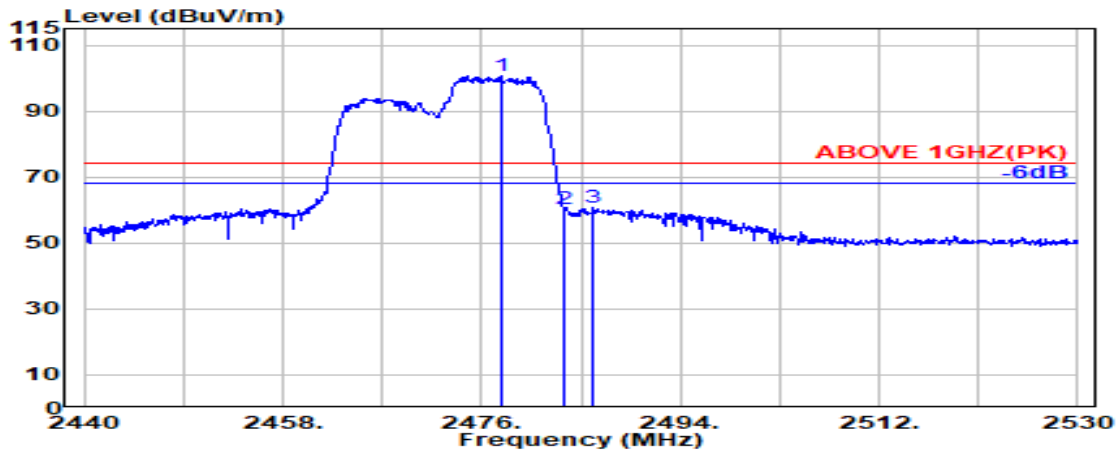

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.725	28.36	5.82	39.92	106.43	100.69	---	---	Peak
2483.500	28.37	5.83	39.92	65.91	60.19	74.00	13.81	Peak
2486.125	28.37	5.83	39.92	66.41	60.70	74.00	13.30	Peak

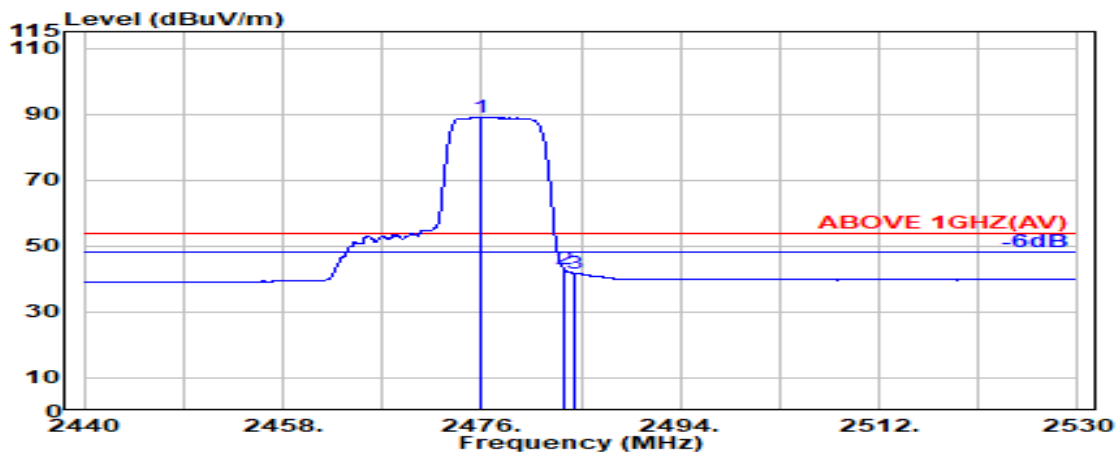


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.850	28.35	5.82	39.92	94.62	88.87	---	---	Average
2483.500	28.37	5.83	39.92	48.69	42.96	54.00	11.04	Average
2484.400	28.37	5.83	39.92	47.56	41.84	54.00	12.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

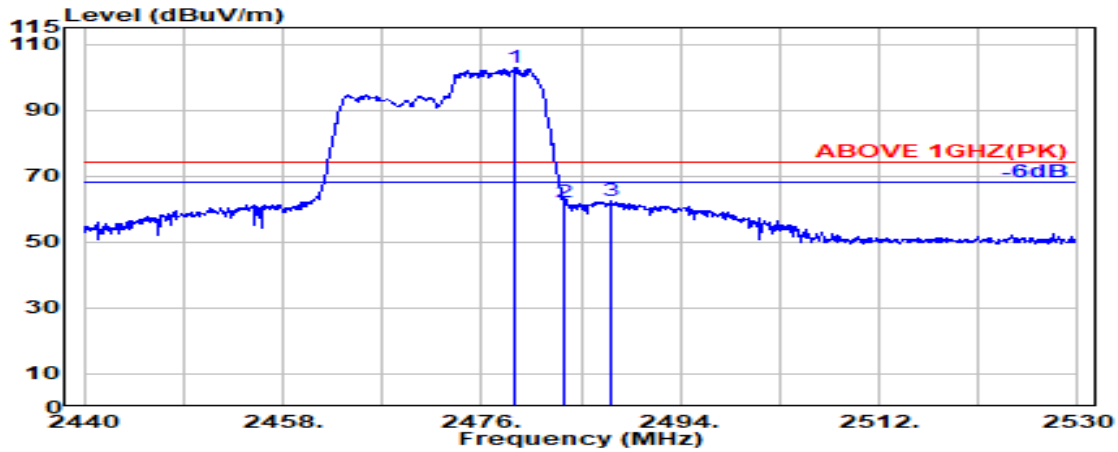

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.075	28.36	5.83	39.92	108.72	102.99	---	---	Peak
2483.500	28.37	5.83	39.92	67.85	62.13	74.00	11.87	Peak
2487.625	28.38	5.84	39.92	68.09	62.38	74.00	11.62	Peak

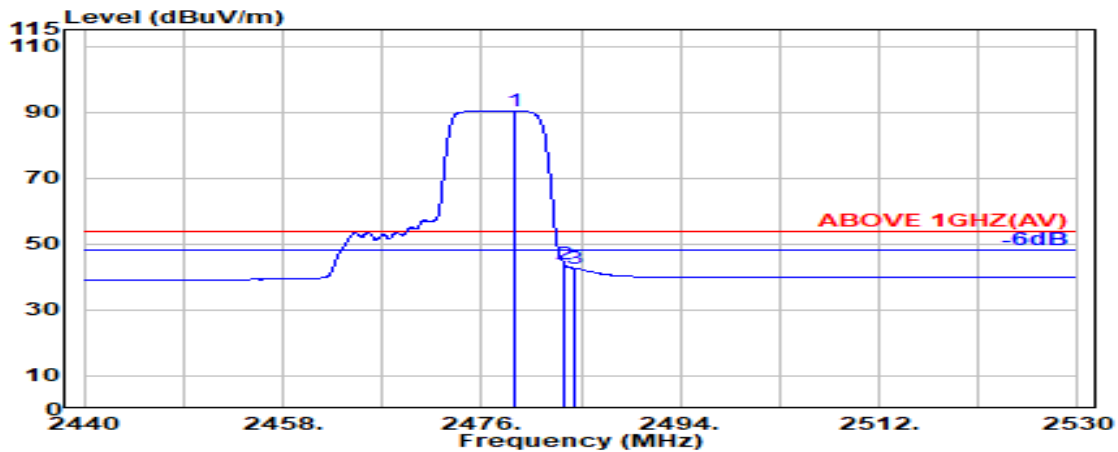


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.925	28.36	5.83	39.92	96.09	90.36	---	---	Average
2483.500	28.37	5.83	39.92	49.65	43.93	54.00	10.07	Average
2484.400	28.37	5.83	39.92	48.34	42.62	54.00	11.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

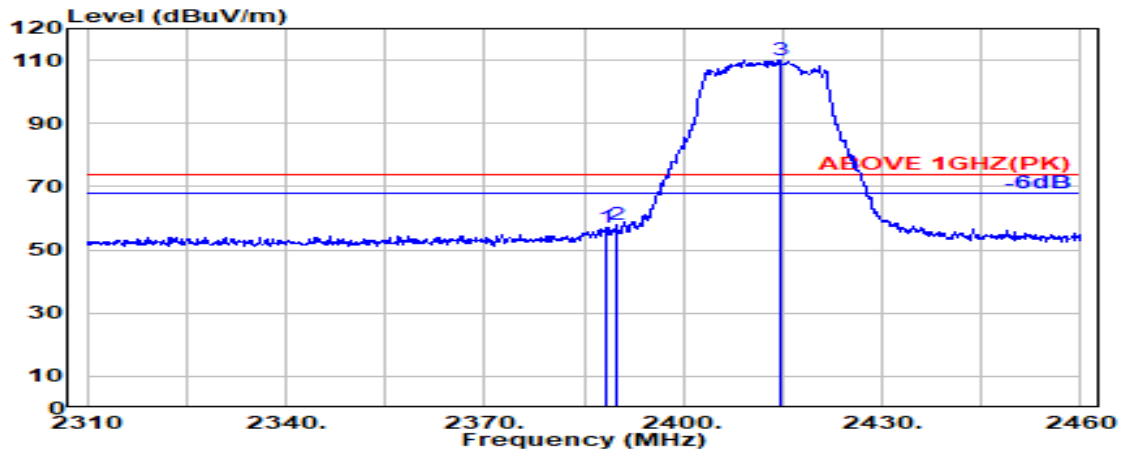

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.15	5.72	39.93	63.28	57.22	74.00	16.78	Peak
2390.000	28.14	5.72	39.93	64.19	58.12	74.00	15.88	Peak
@ 2414.550	28.16	5.75	39.93	116.27	110.26	---	---	Peak

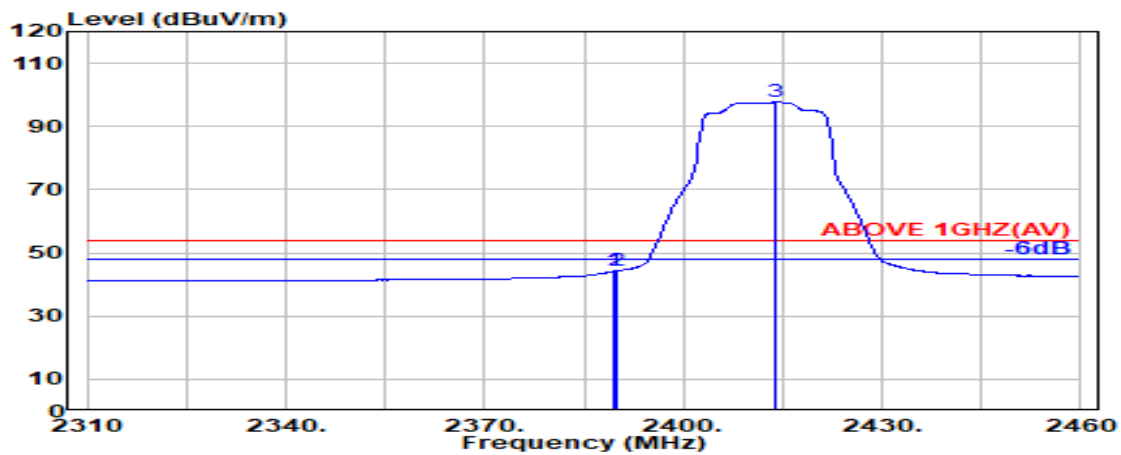

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.93	50.22	44.15	54.00	9.85	Average
2390.000	28.14	5.72	39.93	50.38	44.32	54.00	9.68	Average
@ 2413.950	28.16	5.75	39.93	103.69	97.67	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.