


TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	247
A.2.3 Emissions in Non-restricted Frequency Bands.....	269
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH	270
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	270
A.3.2 Measurement Plots	286
A.4 POWER SPECTRAL DENSITY	343
A.4.1 Power Spectral Density Result	343
A.4.2 Measurement Plots	357
A.5 FREQUENCY STABILITY	425
A.5.1 Frequency stability Result	425

A.1 CONDUCTED EMISSION

Test Date	2024/08/27	Temp./Hum.	25°C/56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

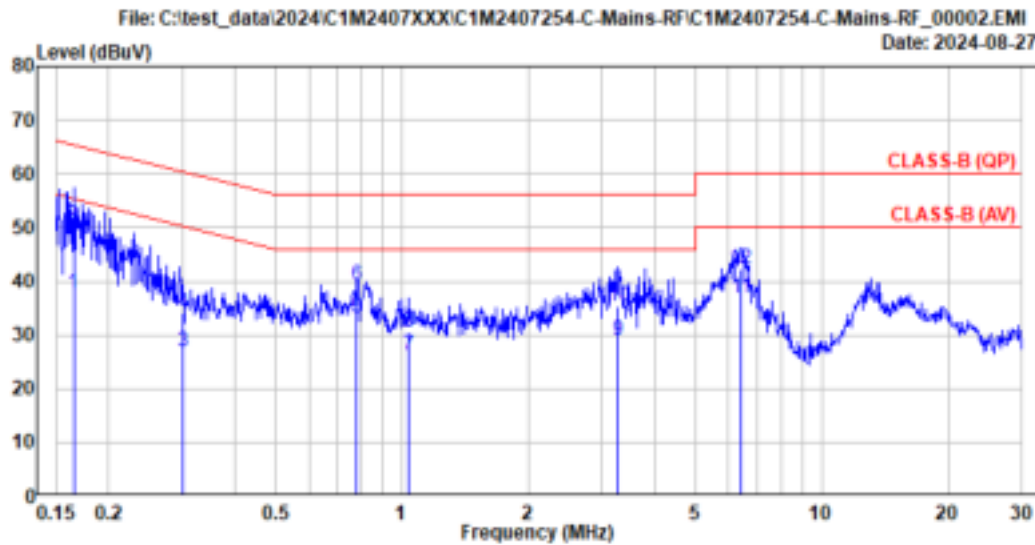


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/56%	Test Rating	: 120Vac/60Hz
EUT Model	: 16290TS	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.165	10.27	0.03	9.85	17.73	37.88	55.21	17.33	Average
2	0.165	10.27	0.03	9.85	30.34	50.49	65.21	14.72	QP
3	0.301	10.26	0.03	9.85	6.67	26.81	50.20	23.39	Average
4	0.301	10.26	0.03	9.85	13.98	34.12	60.20	26.08	QP
5	0.781	10.27	0.04	9.85	12.98	33.14	46.00	12.86	Average
6	0.781	10.27	0.04	9.85	19.03	39.19	56.00	16.81	QP
7	1.037	10.27	0.04	9.85	6.00	26.16	46.00	19.84	Average
8	1.037	10.27	0.04	9.85	10.42	30.58	56.00	25.42	QP
9	3.281	10.33	0.07	9.86	8.82	29.08	46.00	16.92	Average
10	3.281	10.33	0.07	9.86	15.10	35.36	56.00	20.64	QP
11	6.398	10.45	0.10	9.87	16.32	36.74	50.00	13.26	Average
12	6.398	10.45	0.10	9.87	21.78	42.20	60.00	17.80	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2024/08/27	Temp./Hum.	25°C/56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung

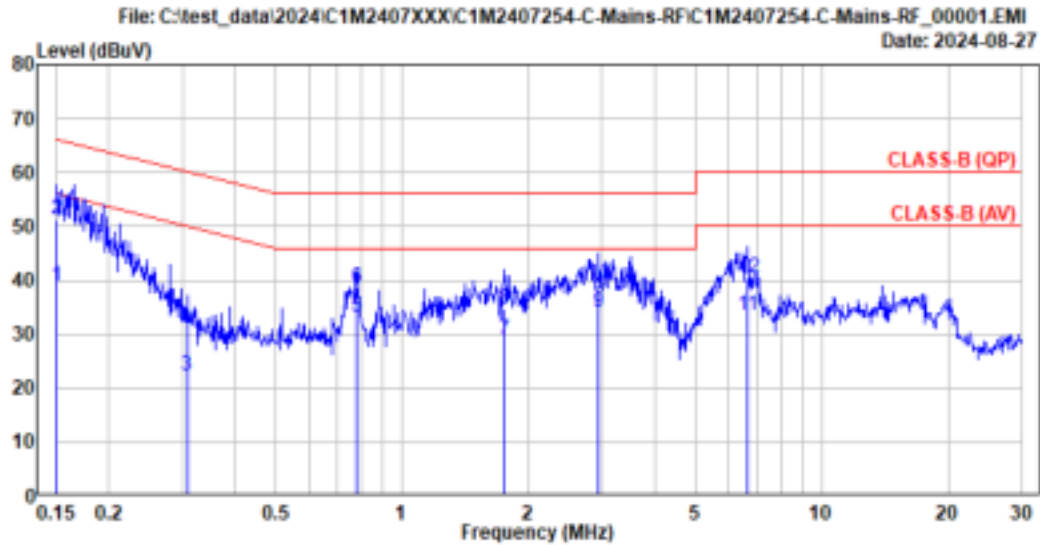

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: EMV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/56%	Test Rating	: 120Vac/60Hz
EUT Model	: 16290TS	Engineer	: Roy Hung
Test Mode	: Operating		

	Freq. (MHz)	AWN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.151	10.26	0.03	9.85	18.92	39.06	55.96	16.90	Average
2	0.151	10.26	0.03	9.85	31.30	51.44	65.96	14.52	QP
3	0.307	10.25	0.03	9.85	2.15	22.28	50.04	27.76	Average
4	0.307	10.25	0.03	9.85	10.64	30.77	60.04	29.27	QP
5	0.777	10.26	0.04	9.85	13.16	33.31	46.00	12.69	Average
6	0.777	10.26	0.04	9.85	18.51	38.66	56.00	17.34	QP
7	1.751	10.27	0.06	9.86	8.72	28.91	46.00	17.09	Average
8	1.751	10.27	0.06	9.86	14.51	34.70	56.00	21.30	QP
9	2.940	10.29	0.07	9.86	13.85	34.07	46.00	11.93	Average
10	2.940	10.29	0.07	9.86	18.98	39.20	56.00	16.80	QP
11	6.659	10.38	0.11	9.87	13.17	33.53	50.00	16.47	Average
12	6.659	10.38	0.11	9.87	20.03	40.39	60.00	19.61	QP

Remarks: 1. Emission Level(dBµV)= Awn Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

A.2 RADIATED EMISSION

Test Date	2024/08/06~26	Temp./Hum.	23~24°C/52~55%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	24.02	1.36	26.51	27.04	25.92	40.00	14.08	Peak
101.500	16.51	2.51	26.31	31.81	24.52	43.50	18.98	Peak
216.000	15.93	3.71	25.80	32.10	25.94	43.50	17.56	Peak
432.000	21.69	6.08	26.77	30.97	31.98	46.00	14.02	Peak
484.500	22.58	6.52	27.12	27.96	29.94	46.00	16.06	Peak
585.500	23.90	6.79	27.45	28.58	31.82	46.00	14.18	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.38	26.50	27.16	25.61	40.00	14.39	Peak
124.500	17.71	2.80	26.17	31.19	25.54	43.50	17.96	Peak
216.000	15.93	3.71	25.80	30.67	24.51	43.50	18.99	Peak
432.000	21.69	6.08	26.77	31.90	32.91	46.00	13.09	Peak
645.000	24.28	7.04	27.48	28.33	32.17	46.00	13.83	Peak
914.000	26.26	8.52	27.10	27.59	35.27	46.00	10.73	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

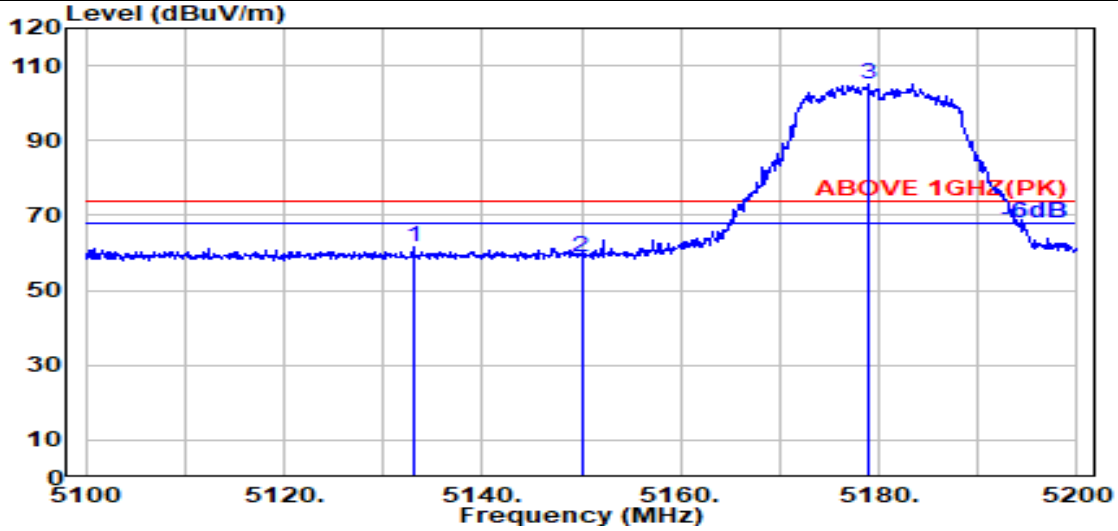

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.100	33.47	8.36	39.27	59.24	61.79	74.00	12.21	Peak
5150.000	33.50	8.37	39.27	56.43	59.04	74.00	14.96	Peak
@ 5179.000	33.67	8.40	39.27	102.37	105.18	---	---	Peak

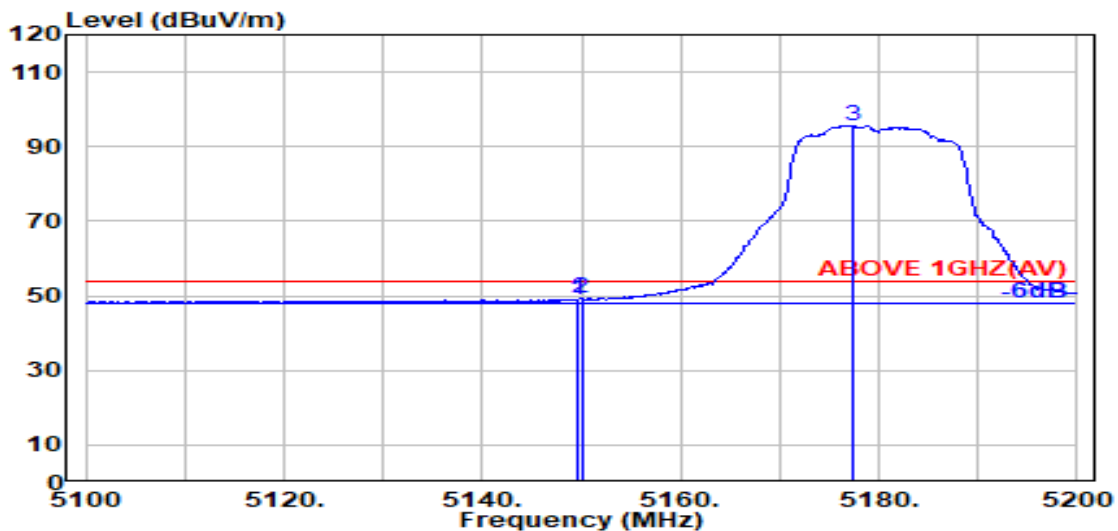


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.27	46.43	49.03	54.00	4.97	Average
5150.000	33.50	8.37	39.27	46.56	49.17	54.00	4.83	Average
@ 5177.300	33.66	8.40	39.27	92.98	95.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

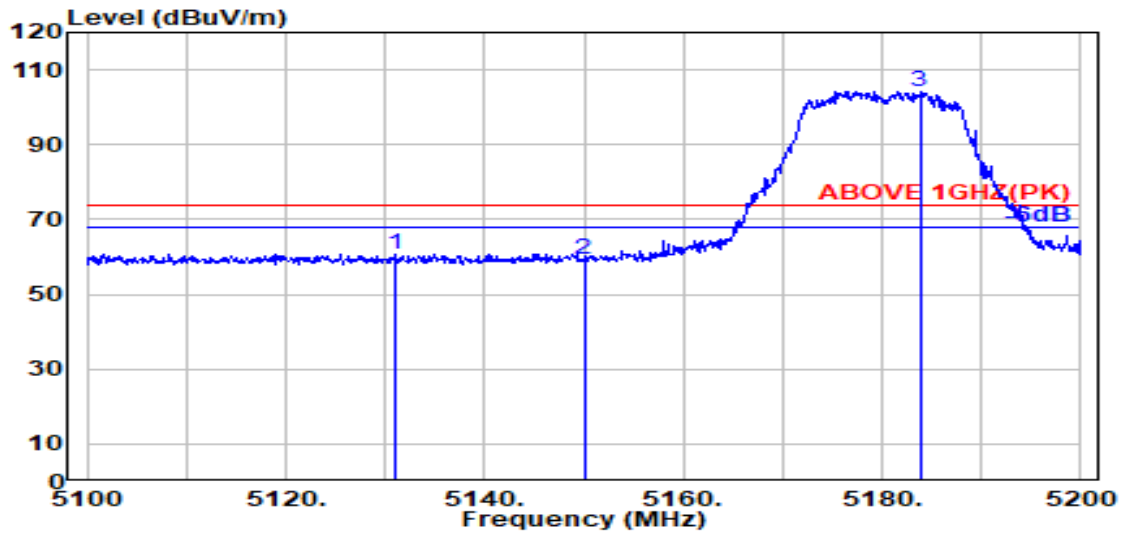

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.900	33.46	8.35	39.27	58.26	60.81	74.00	13.19	Peak
5150.000	33.50	8.37	39.27	56.70	59.30	74.00	14.70	Peak
@ 5183.800	33.70	8.41	39.27	101.47	104.31	---	---	Peak

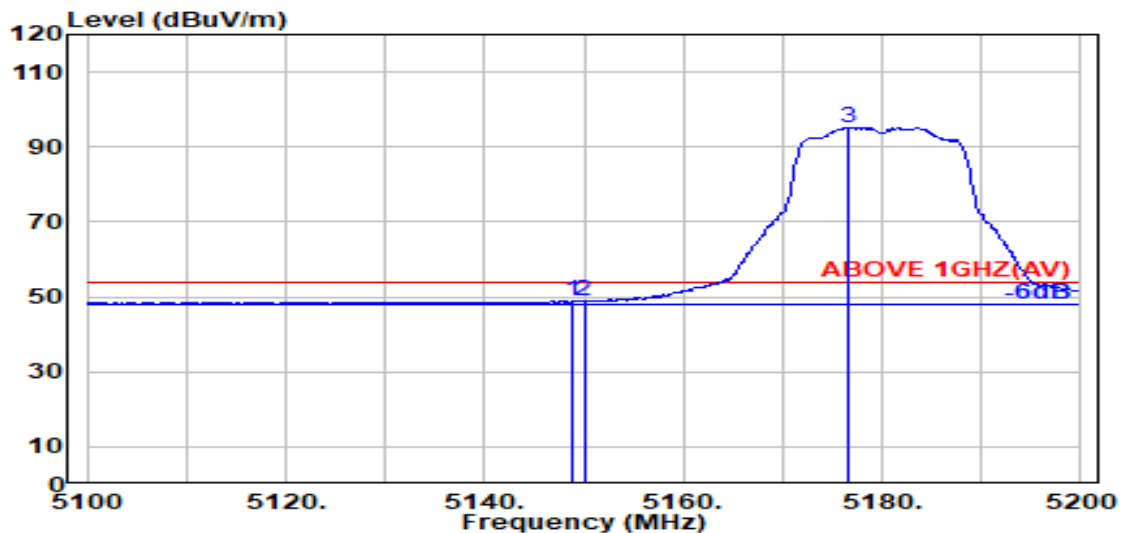


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.27	46.44	49.04	54.00	4.96	Average
5150.000	33.50	8.37	39.27	46.18	48.79	54.00	5.21	Average
@ 5176.700	33.66	8.40	39.27	92.52	95.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

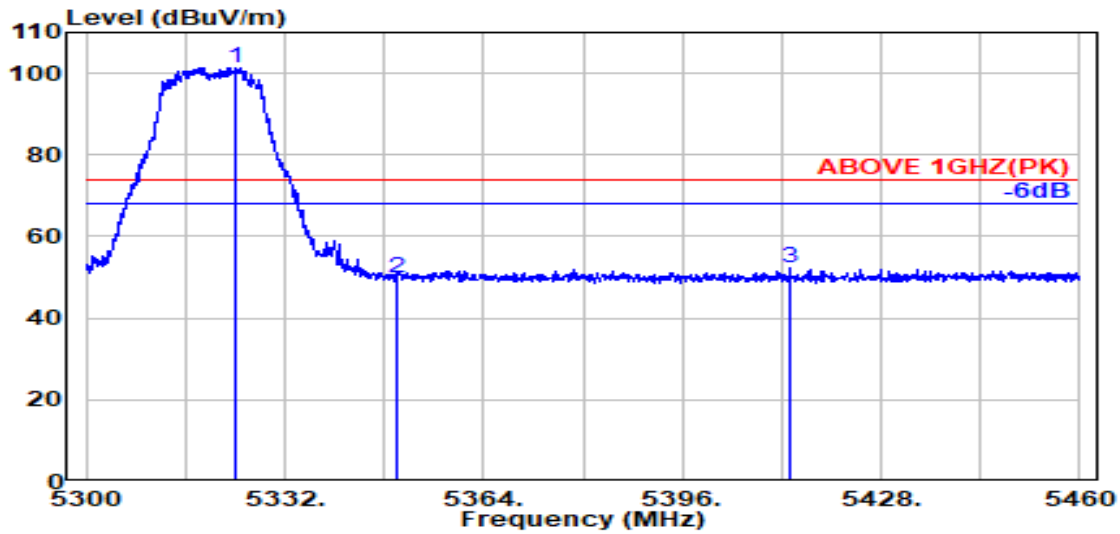

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5324.100	33.75	8.55	39.26	98.45	101.49	---	---	Peak
	5350.000	33.70	8.57	39.26	46.92	49.94	74.00	24.06	Peak
	5413.400	33.93	8.63	39.25	48.94	52.25	74.00	21.75	Peak

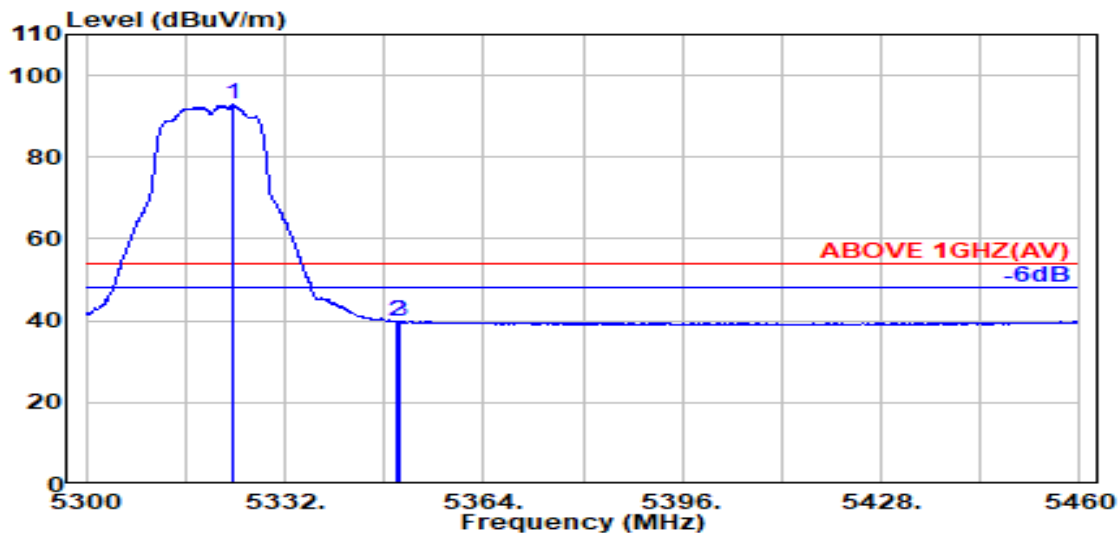


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5323.800	33.75	8.55	39.26	89.78	92.82	---	---	Average
	5350.000	33.70	8.57	39.26	36.82	39.83	54.00	14.17	Average
	5350.600	33.70	8.57	39.26	36.82	39.84	54.00	14.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

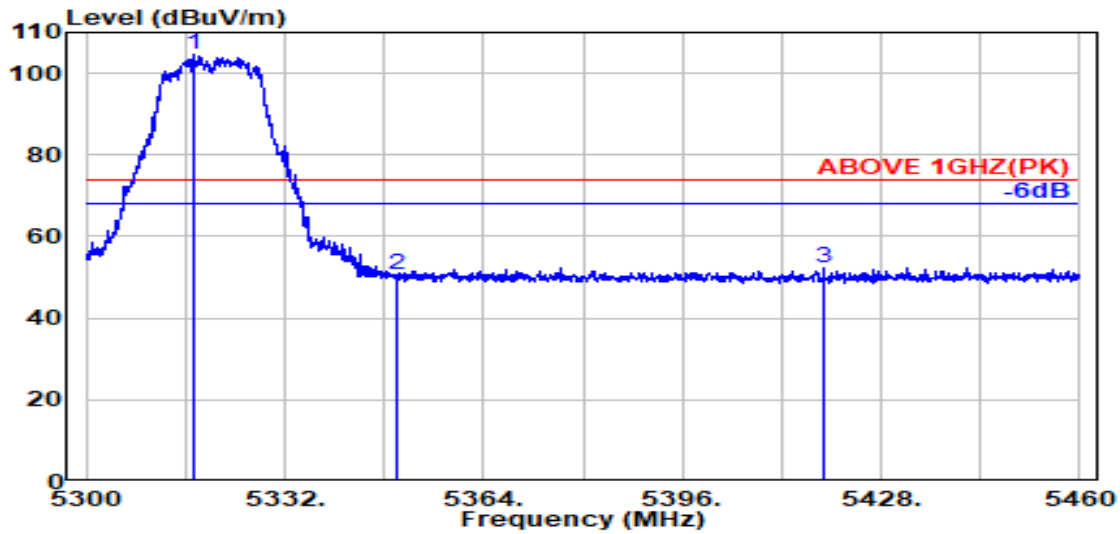

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	33.77	8.54	39.26	101.39	104.44	---	---	Peak
5350.000	33.70	8.57	39.26	47.66	50.68	74.00	23.32	Peak
5418.800	33.94	8.64	39.25	49.14	52.47	74.00	21.53	Peak

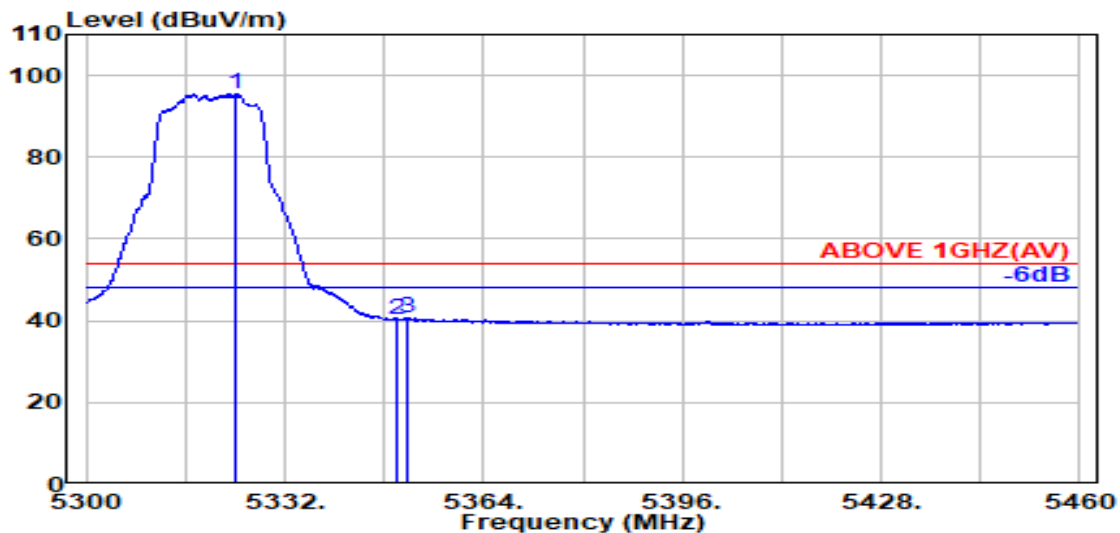


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.200	33.75	8.55	39.26	92.50	95.54	---	---	Average
5350.000	33.70	8.57	39.26	37.37	40.38	54.00	13.62	Average
5351.900	33.71	8.57	39.26	37.61	40.64	54.00	13.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

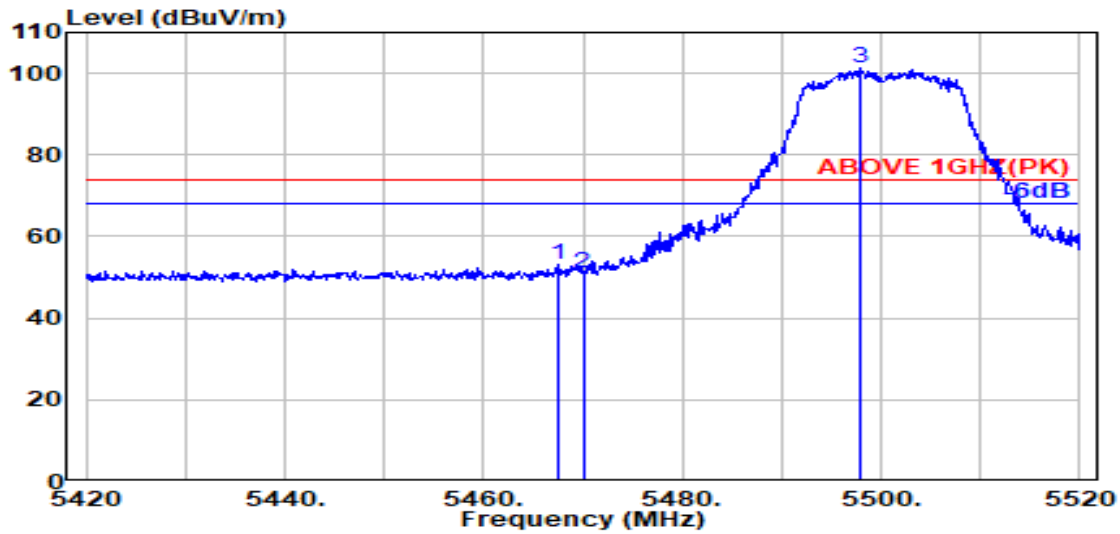

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.25	49.53	53.00	74.00	21.00	Peak
5470.000	34.04	8.69	39.25	47.51	50.99	74.00	23.01	Peak
@ 5498.000	34.10	8.71	39.25	97.54	101.10	---	---	Peak

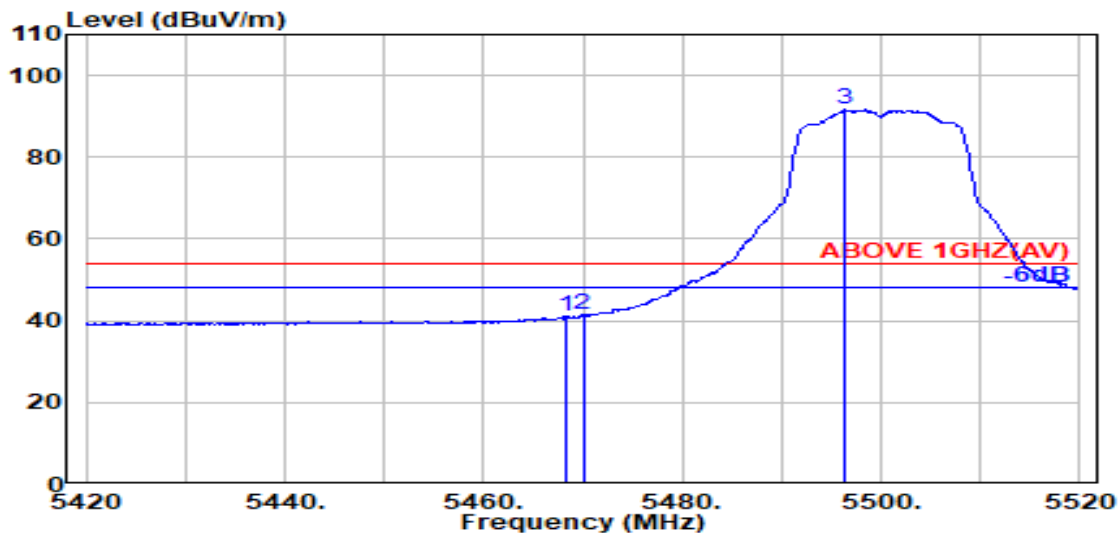


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.04	8.69	39.25	37.50	40.98	54.00	13.02	Average
5470.000	34.04	8.69	39.25	37.89	41.37	54.00	12.63	Average
@ 5496.300	34.09	8.71	39.25	88.02	91.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

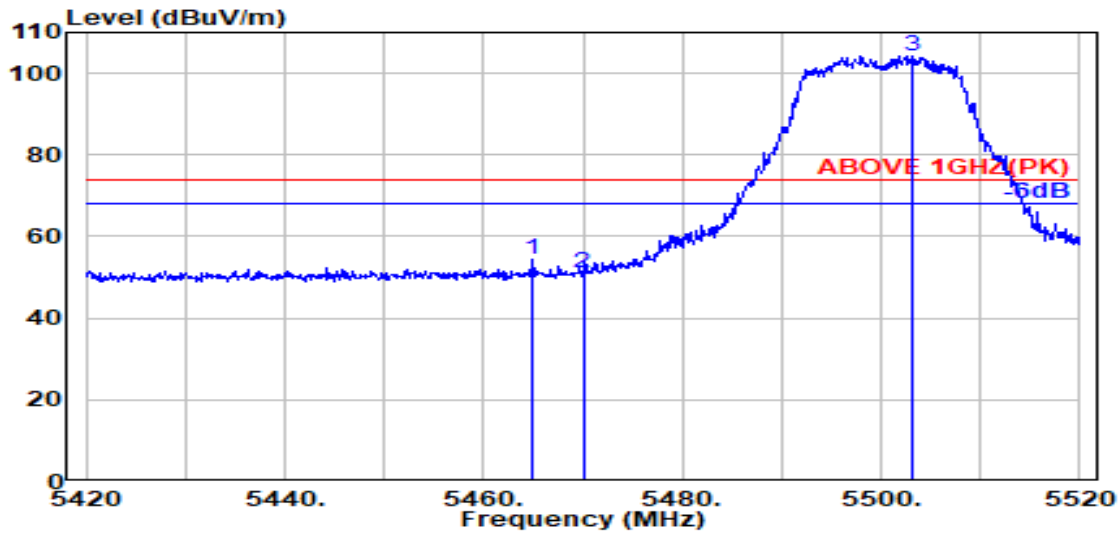

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.03	8.68	39.25	51.01	54.47	74.00	19.53	Peak
5470.000	34.04	8.69	39.25	47.73	51.21	74.00	22.79	Peak
@ 5503.200	34.09	8.72	39.25	100.61	104.17	---	---	Peak

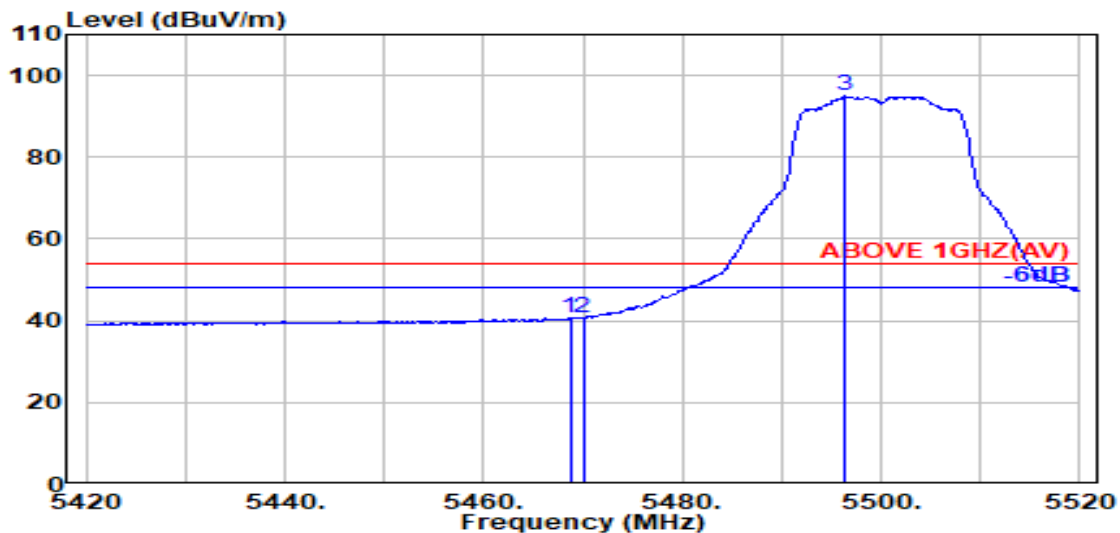


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.25	37.22	40.69	54.00	13.31	Average
5470.000	34.04	8.69	39.25	37.19	40.67	54.00	13.33	Average
@ 5496.400	34.09	8.71	39.25	91.36	94.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

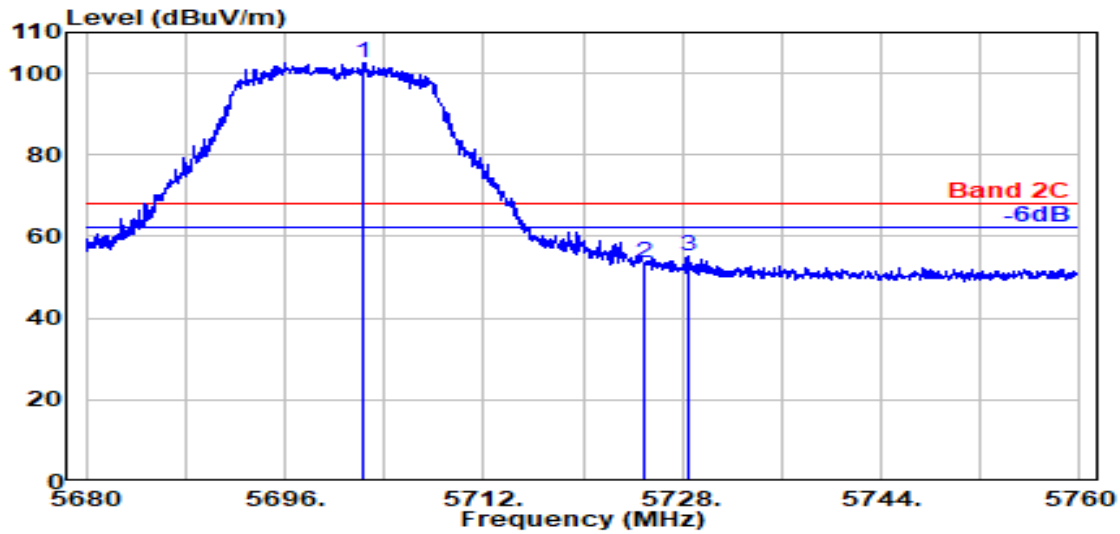

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.250	33.60	8.90	39.29	99.46	102.68	---	---	Peak
	5725.000	33.60	8.93	39.29	50.21	53.44	68.20	14.76	Peak
	5728.400	33.60	8.93	39.29	51.85	55.09	68.20	13.11	Peak

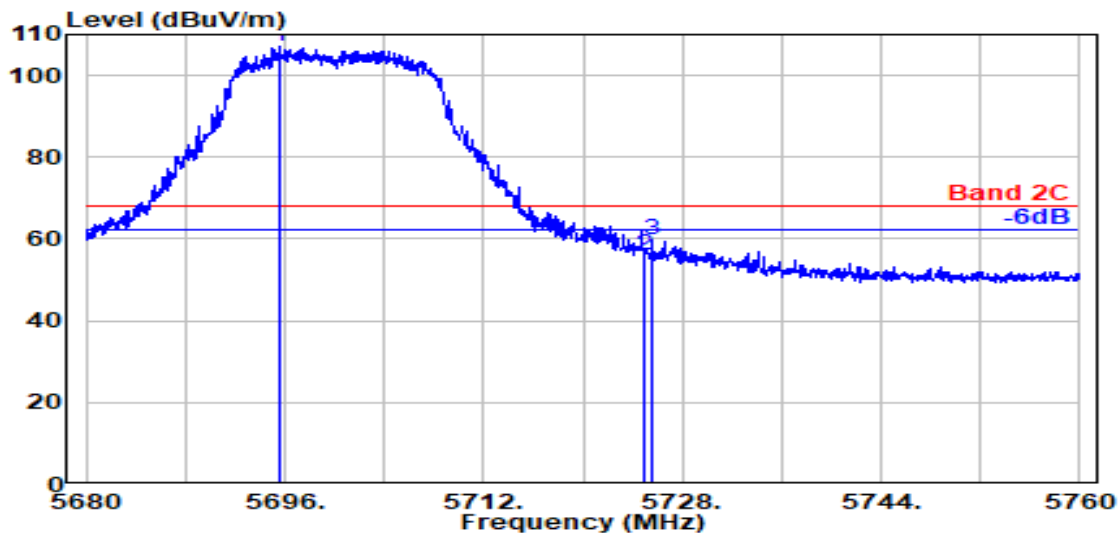


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5695.600	33.62	8.90	39.29	103.98	107.21	---	---	Peak
	5725.000	33.60	8.93	39.29	52.67	55.91	68.20	12.29	Peak
	5725.650	33.60	8.93	39.29	56.40	59.64	68.20	8.56	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

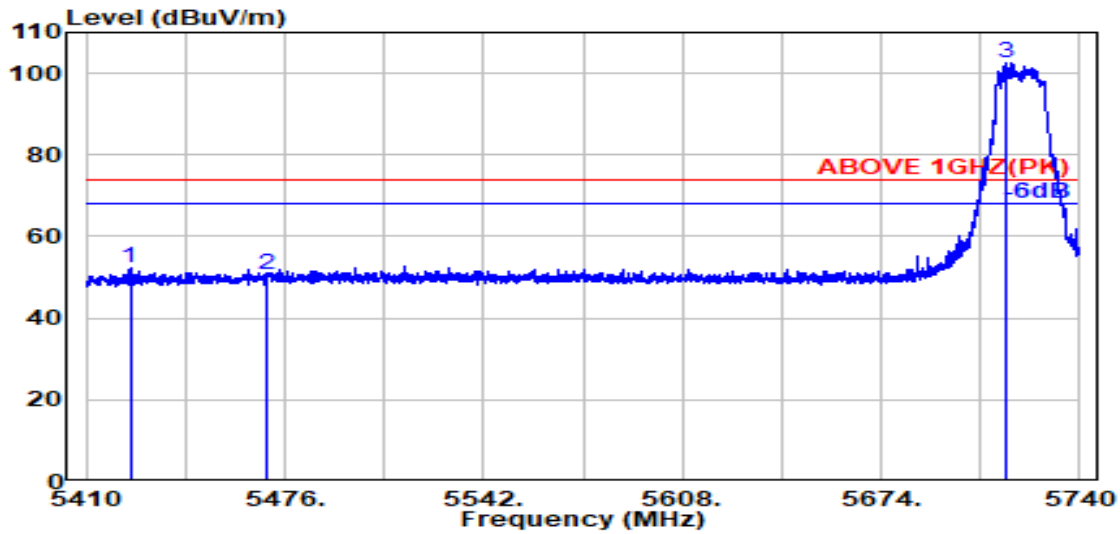

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.600	33.95	8.64	39.25	49.09	52.43	74.00	21.57	Peak
5470.000	34.04	8.69	39.25	47.11	50.58	74.00	23.42	Peak
@ 5715.800	33.60	8.92	39.29	99.34	102.57	---	---	Peak

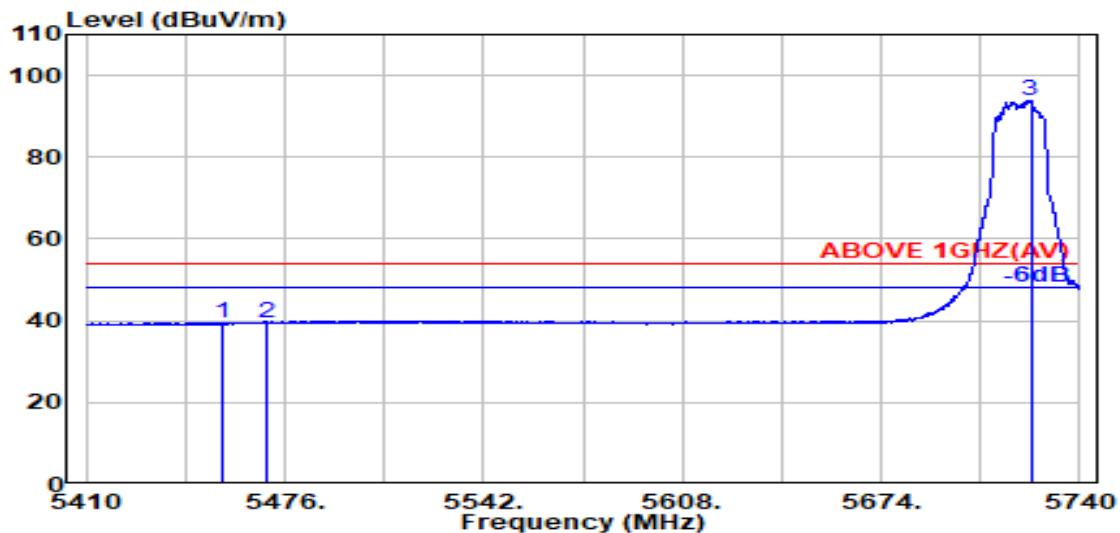


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.300	34.01	8.67	39.25	36.19	39.62	54.00	14.38	Average
5470.000	34.04	8.69	39.25	35.99	39.46	54.00	14.54	Average
@ 5723.700	33.60	8.92	39.29	90.65	93.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

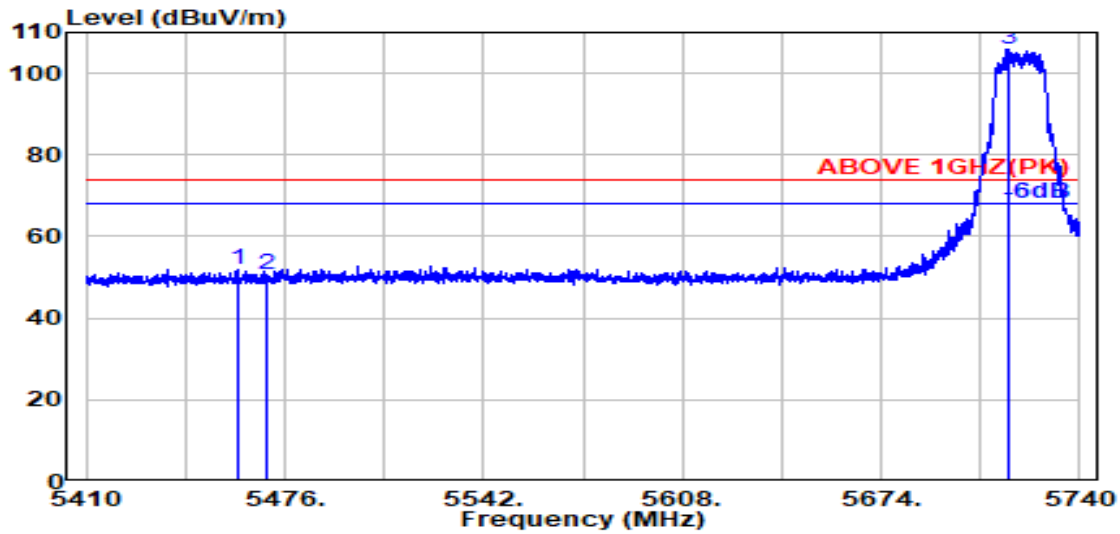

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.100	34.02	8.68	39.25	48.58	52.03	74.00	21.97	Peak
5470.000	34.04	8.69	39.25	47.10	50.58	74.00	23.42	Peak
@ 5716.000	33.60	8.92	39.29	102.48	105.71	---	---	Peak

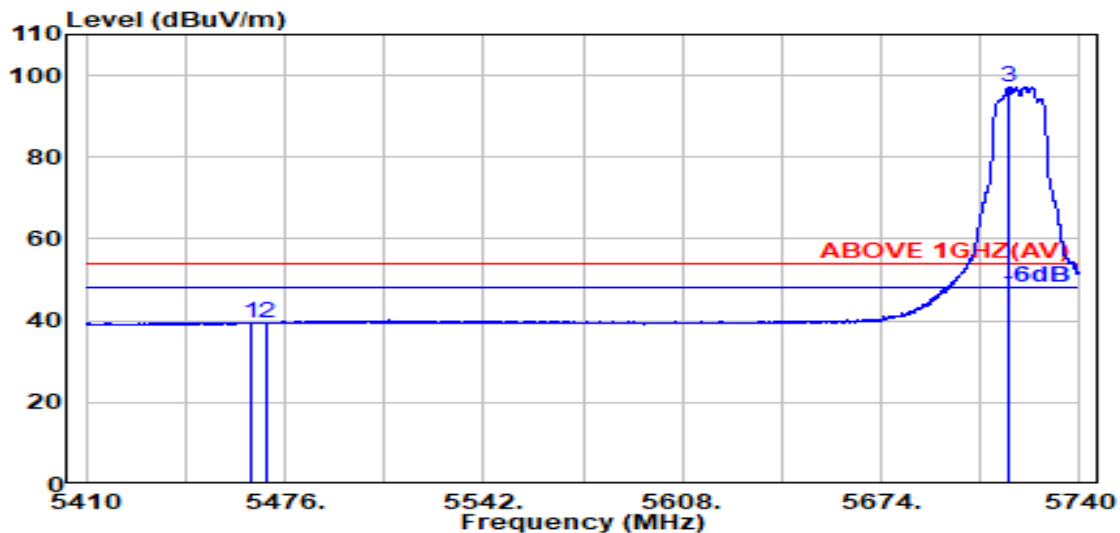


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.03	8.68	39.25	36.17	39.63	54.00	14.37	Average
5470.000	34.04	8.69	39.25	35.92	39.40	54.00	14.60	Average
@ 5716.600	33.60	8.92	39.29	93.95	97.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

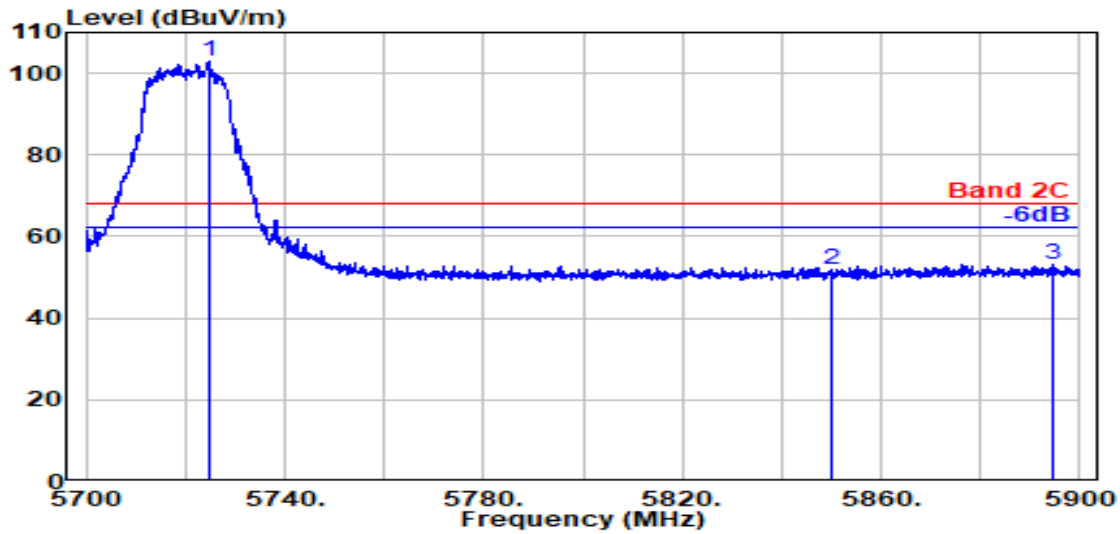

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.600	33.60	8.93	39.29	99.55	102.78	---	---	Peak
5850.000	33.90	9.04	39.31	48.12	51.75	68.20	16.45	Peak
5894.600	34.08	9.08	39.32	49.36	53.20	68.20	15.00	Peak

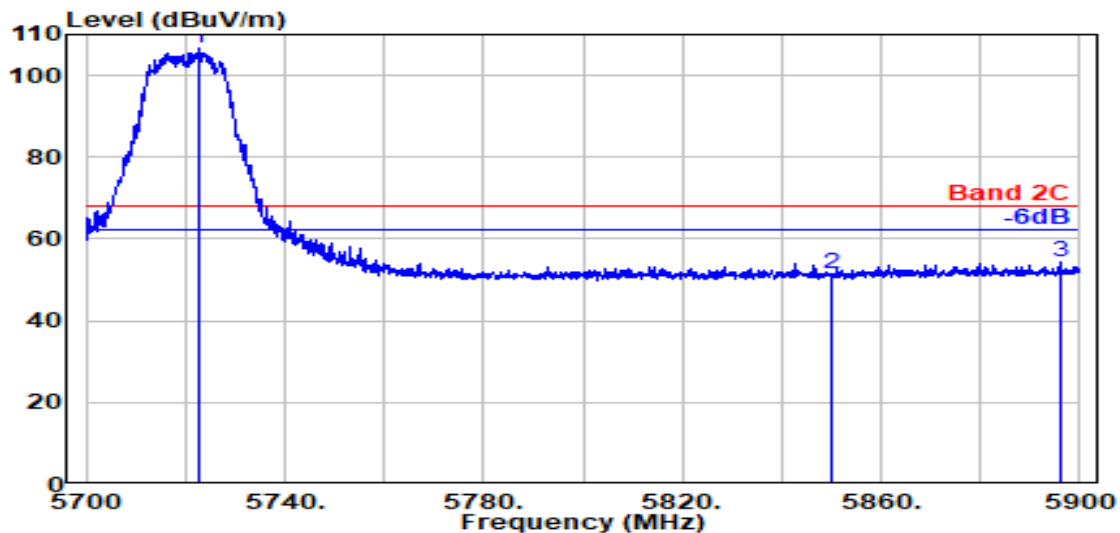


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.700	33.60	8.92	39.29	103.53	106.77	---	---	Peak
5850.000	33.90	9.04	39.31	47.65	51.27	68.20	16.93	Peak
5896.100	34.08	9.08	39.32	50.38	54.23	68.20	13.97	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

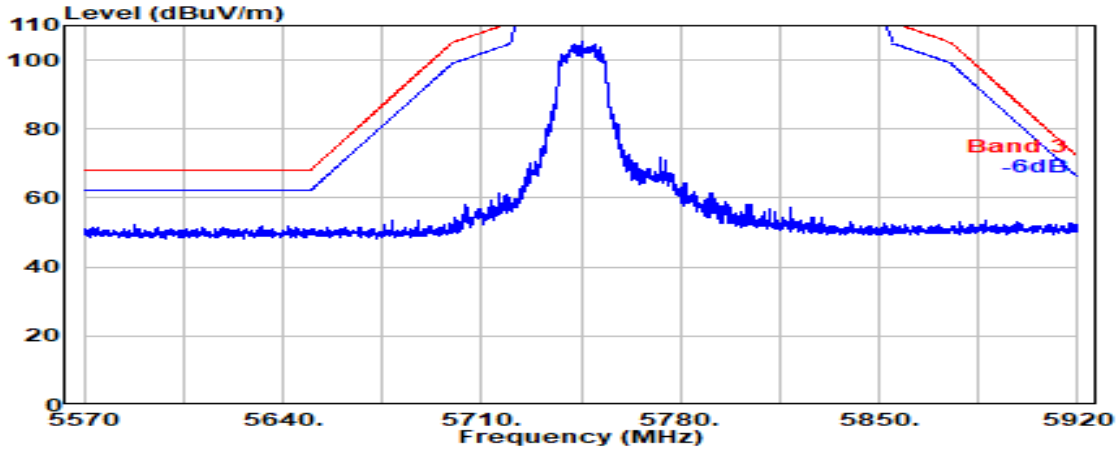


Antenna at Vertical Polarization

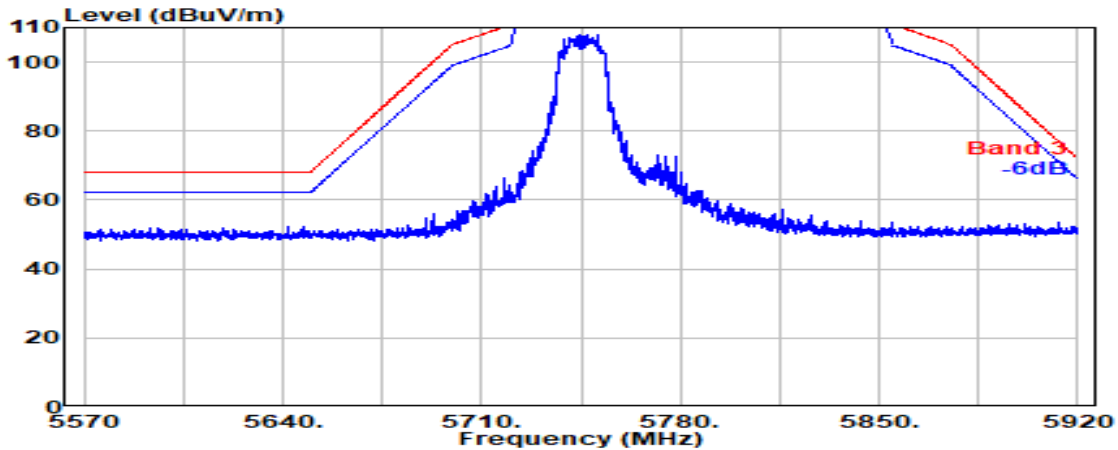


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

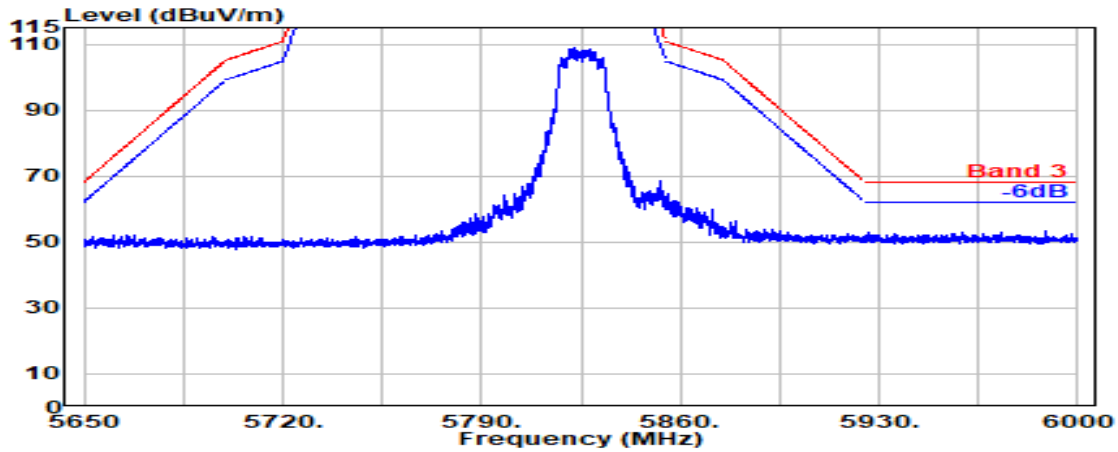

Antenna at Vertical Polarization

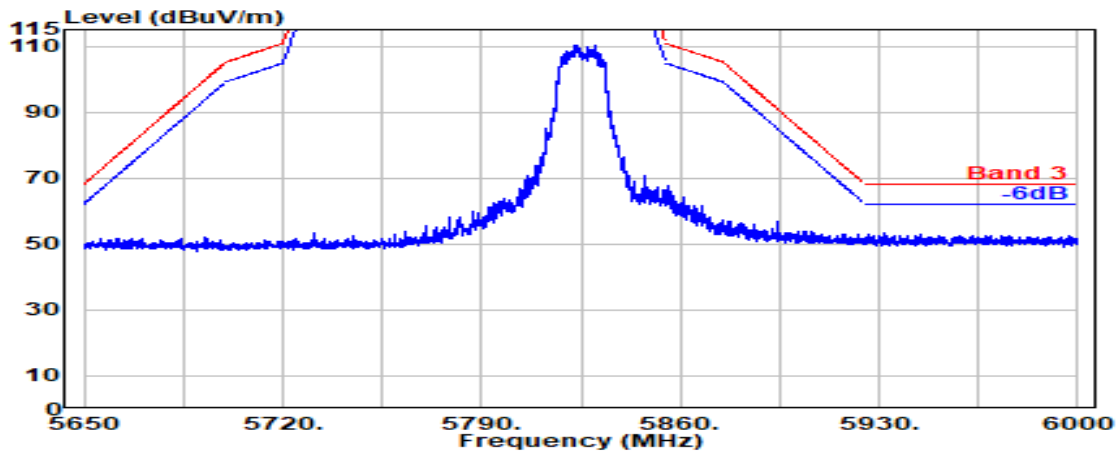


Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

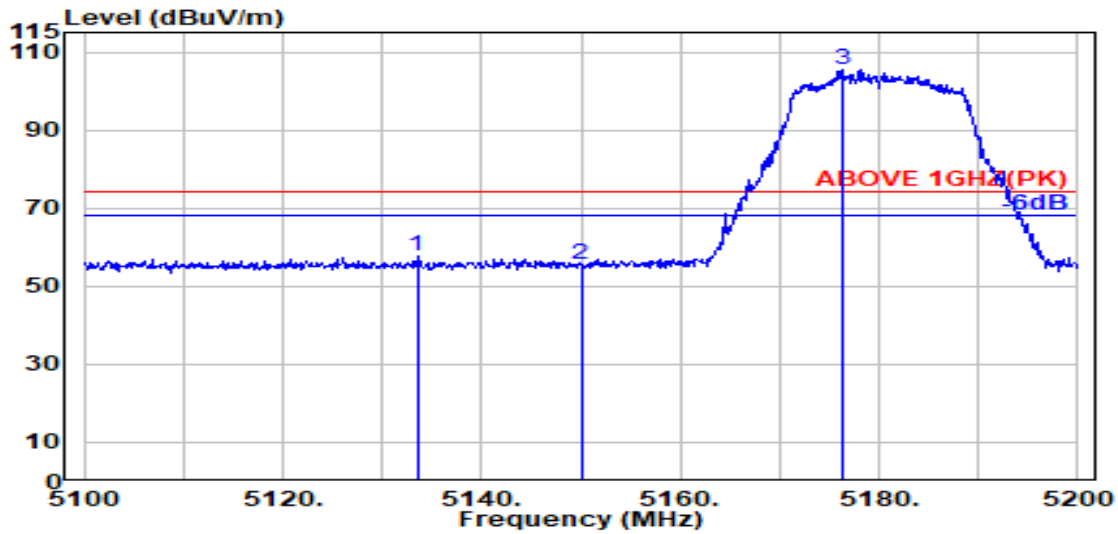

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.500	33.47	8.36	39.27	55.38	57.93	74.00	16.07	Peak
5150.000	33.50	8.37	39.27	52.87	55.47	74.00	18.53	Peak
@ 5176.300	33.66	8.40	39.27	102.64	105.43	---	---	Peak

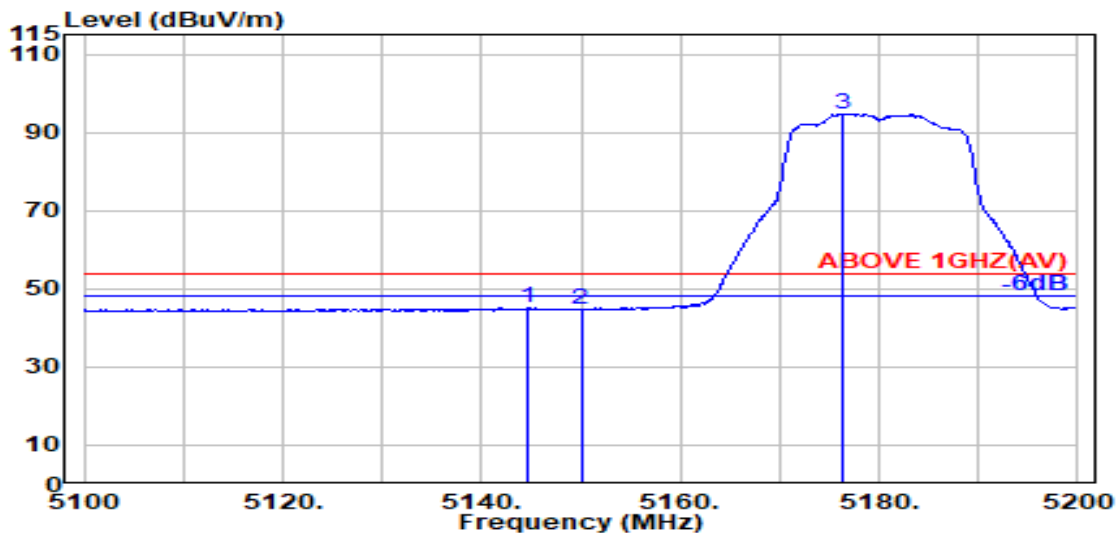


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	33.49	8.37	39.27	42.39	44.98	54.00	9.02	Average
5150.000	33.50	8.37	39.27	42.02	44.62	54.00	9.38	Average
@ 5176.300	33.66	8.40	39.27	91.99	94.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

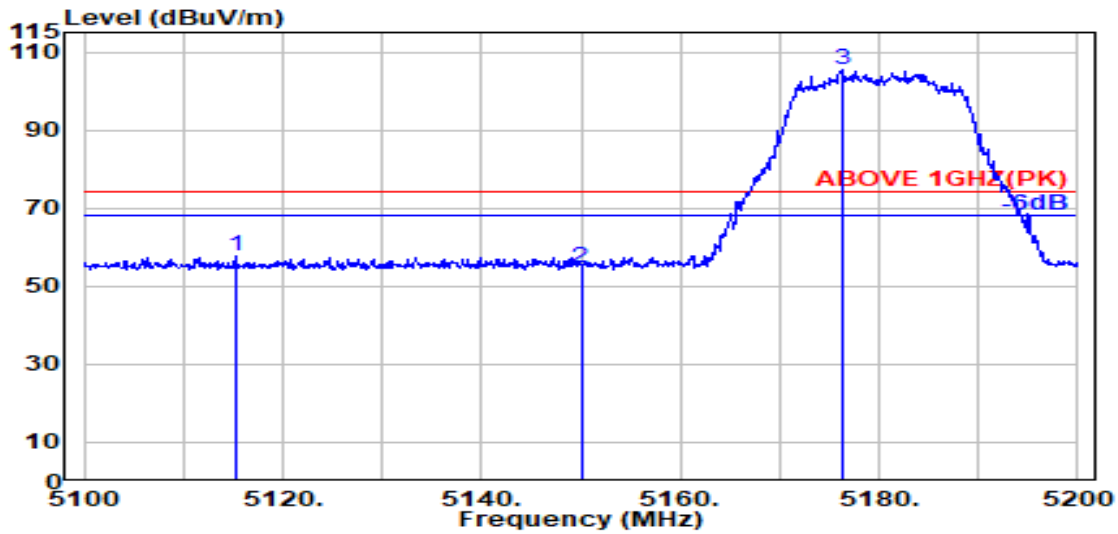

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.300	33.43	8.34	39.27	55.08	57.57	74.00	16.43	Peak
5150.000	33.50	8.37	39.27	52.24	54.85	74.00	19.15	Peak
@ 5176.400	33.66	8.40	39.27	102.85	105.64	---	---	Peak

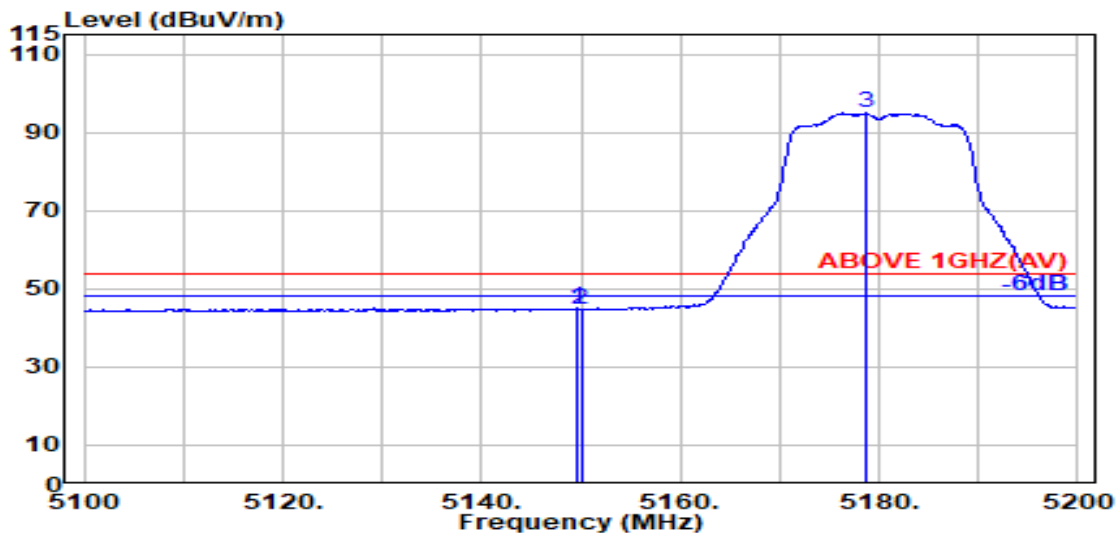


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.27	42.41	45.01	54.00	8.99	Average
5150.000	33.50	8.37	39.27	42.02	44.62	54.00	9.38	Average
@ 5178.700	33.67	8.40	39.27	92.04	94.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

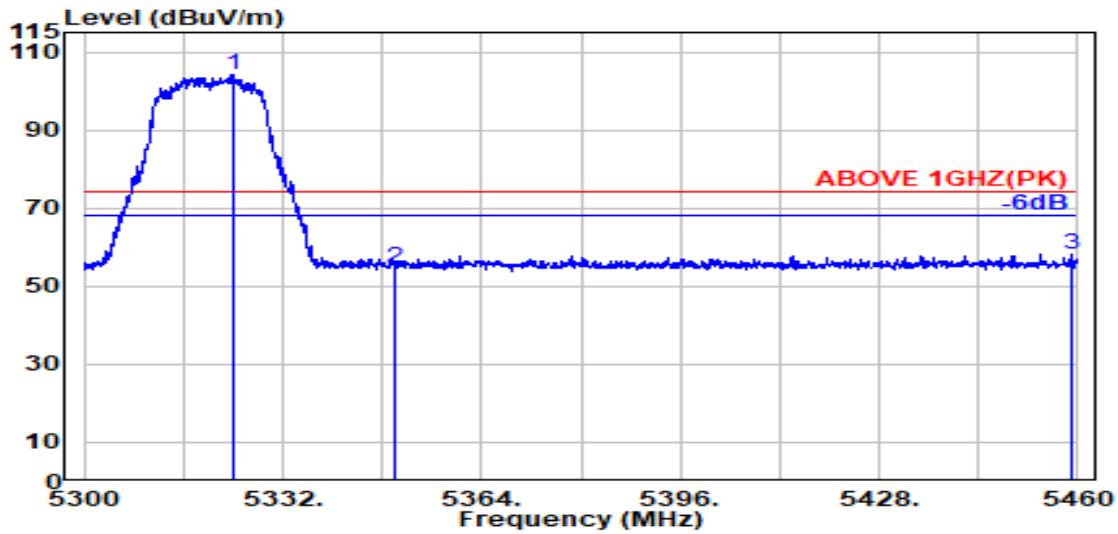

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.000	33.75	8.55	39.26	101.14	104.18	---	---	Peak
5350.000	33.70	8.57	39.26	51.81	54.82	74.00	19.18	Peak
5459.100	34.02	8.68	39.25	54.55	57.99	74.00	16.01	Peak

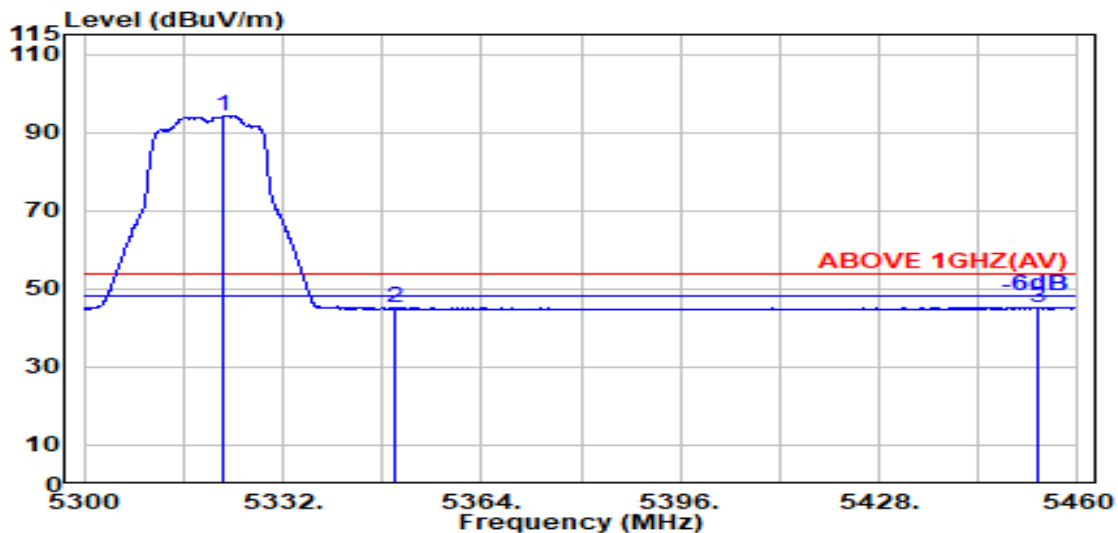


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.500	33.75	8.55	39.26	91.12	94.16	---	---	Average
5350.000	33.70	8.57	39.26	42.15	45.17	54.00	8.83	Average
5453.500	34.01	8.67	39.25	41.88	45.30	54.00	8.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

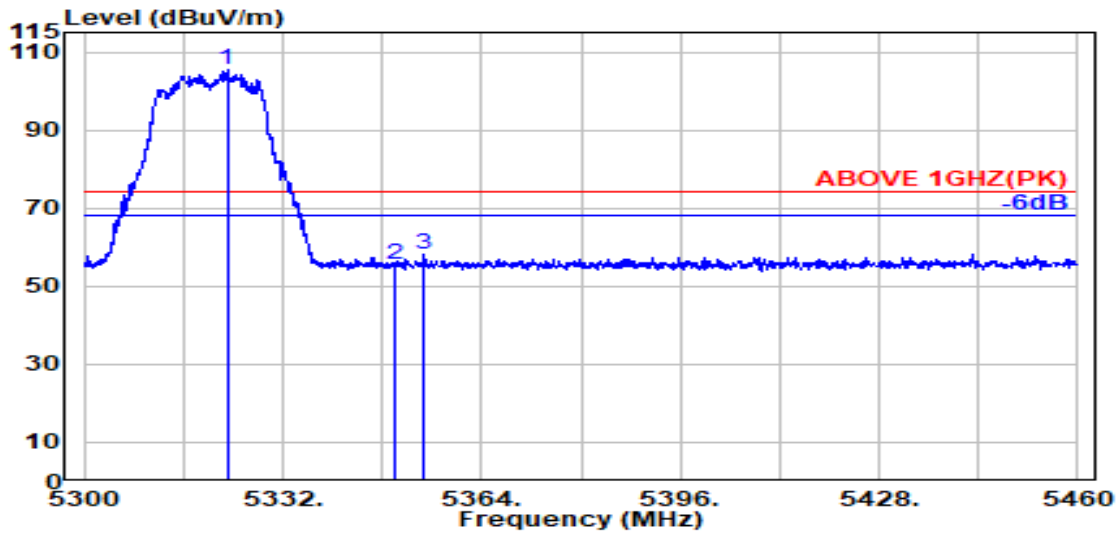

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.000	33.75	8.55	39.26	102.21	105.25	---	---	Peak
5350.000	33.70	8.57	39.26	52.73	55.75	74.00	18.25	Peak
5354.800	33.72	8.58	39.26	55.06	58.10	74.00	15.90	Peak

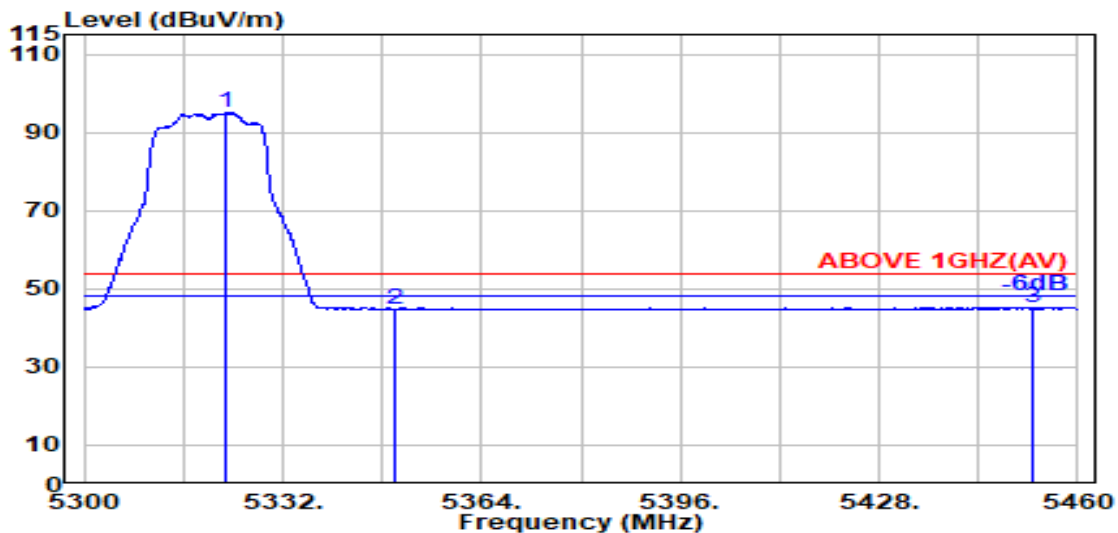


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.800	33.75	8.55	39.26	91.98	95.02	---	---	Average
5350.000	33.70	8.57	39.26	41.75	44.77	54.00	9.24	Average
5452.700	34.01	8.67	39.25	41.86	45.29	54.00	8.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

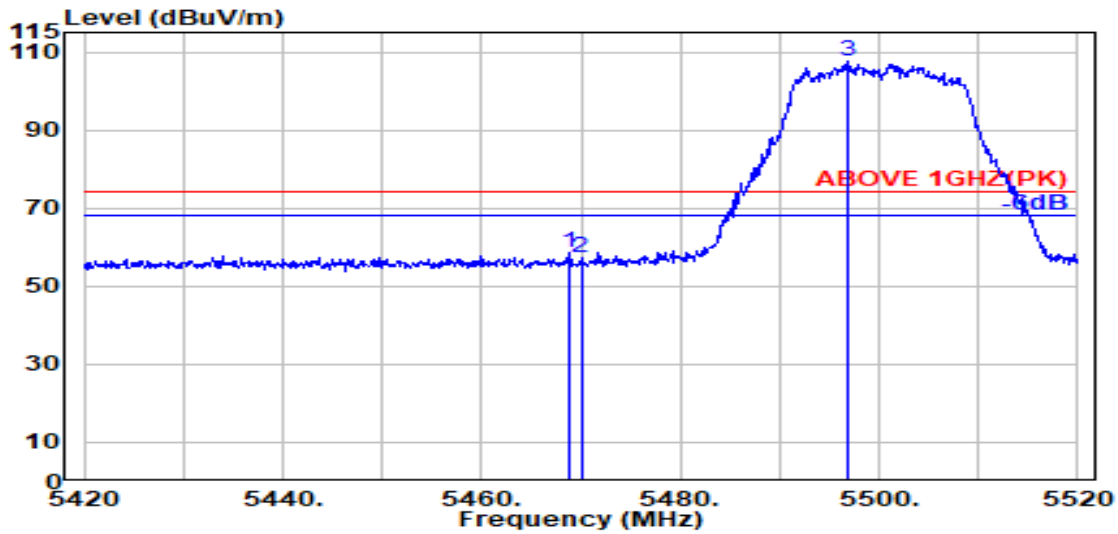

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.25	54.90	58.37	74.00	15.63	Peak
5470.000	34.04	8.69	39.25	53.62	57.10	74.00	16.90	Peak
@ 5496.800	34.09	8.71	39.25	103.86	107.42	---	---	Peak

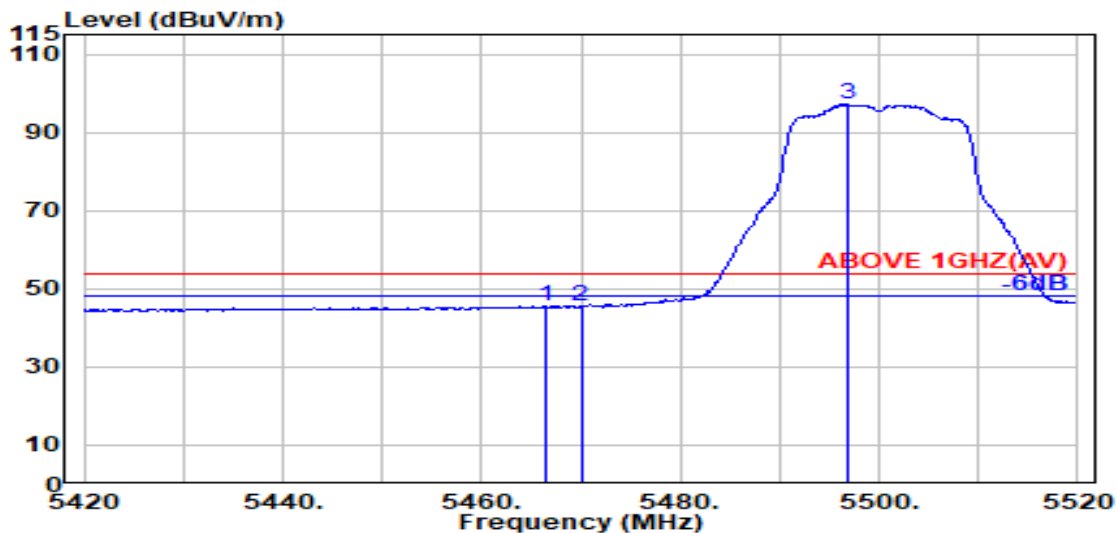


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.03	8.68	39.25	42.15	45.62	54.00	8.38	Average
5470.000	34.04	8.69	39.25	41.88	45.36	54.00	8.64	Average
@ 5496.800	34.09	8.71	39.25	93.58	97.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

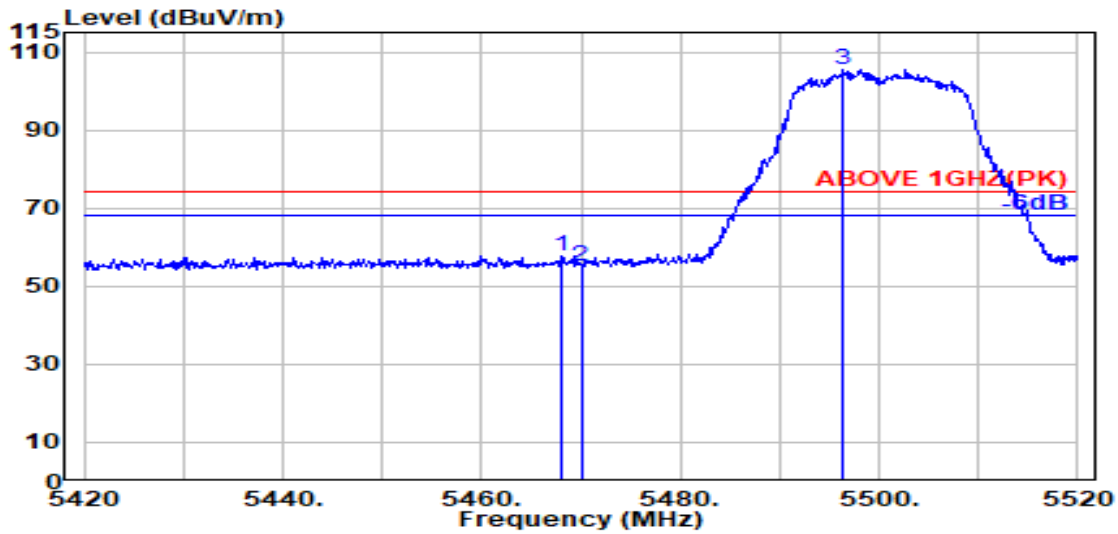

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.25	54.11	57.58	74.00	16.42	Peak
5470.000	34.04	8.69	39.25	51.70	55.18	74.00	18.82	Peak
@ 5496.400	34.09	8.71	39.25	101.91	105.47	---	---	Peak

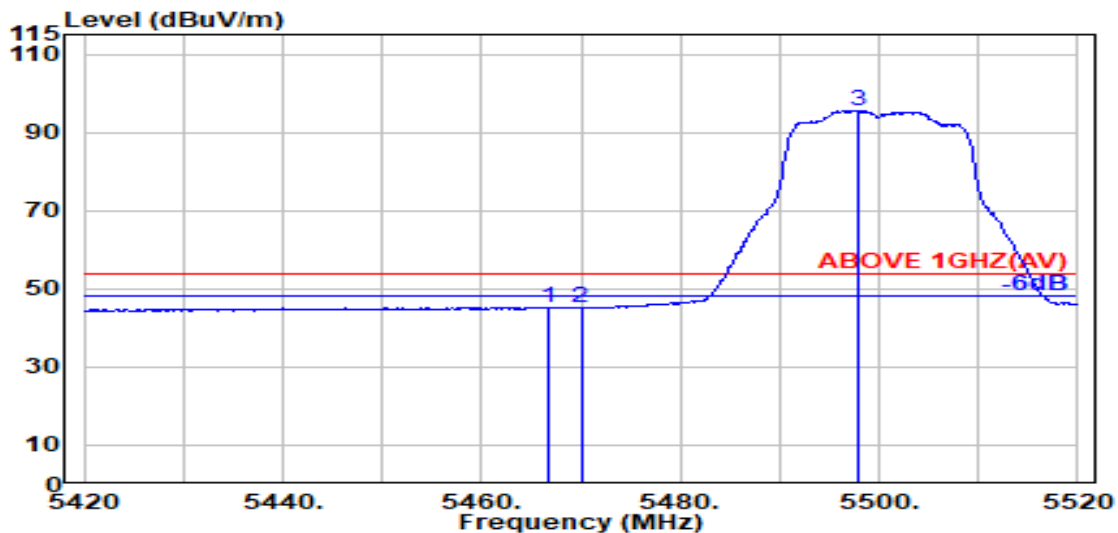


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.03	8.68	39.25	41.79	45.26	54.00	8.74	Average
5470.000	34.04	8.69	39.25	41.56	45.04	54.00	8.96	Average
@ 5497.900	34.10	8.71	39.25	92.06	95.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

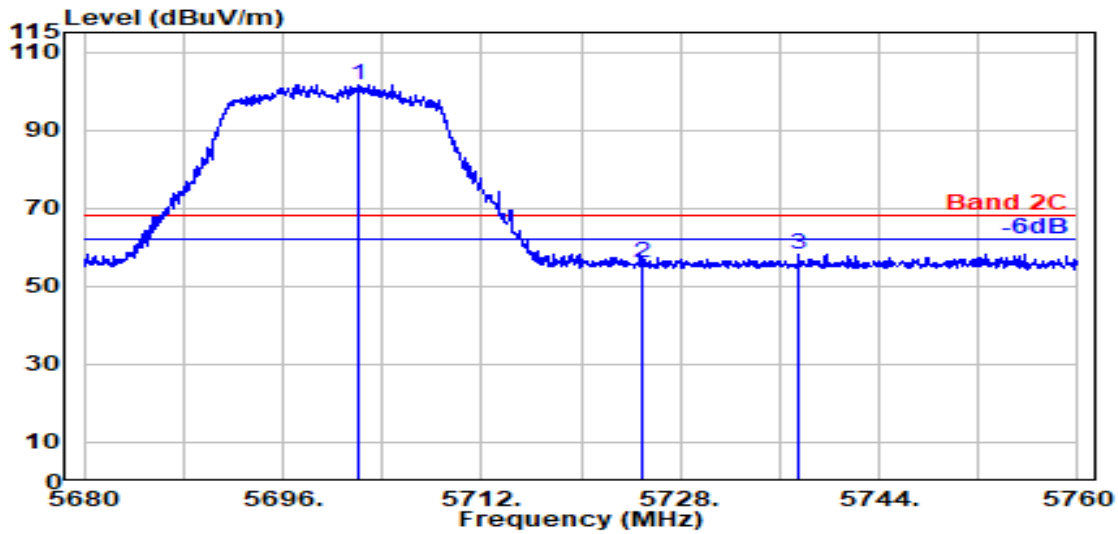

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.050	33.60	8.90	39.29	98.54	101.76	---	---	Peak
5725.000	33.60	8.93	39.29	52.56	55.79	68.20	12.41	Peak
5737.500	33.60	8.94	39.29	54.92	58.17	68.20	10.03	Peak

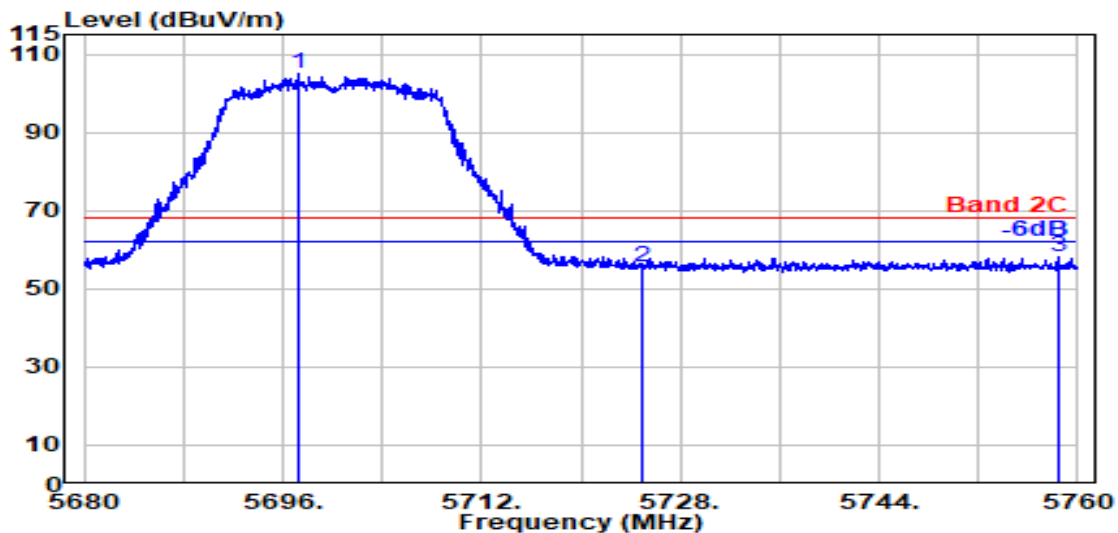


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.200	33.61	8.90	39.29	101.89	105.12	---	---	Peak
5725.000	33.60	8.93	39.29	52.14	55.37	68.20	12.83	Peak
5758.450	33.63	8.96	39.30	54.68	57.97	68.20	10.23	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

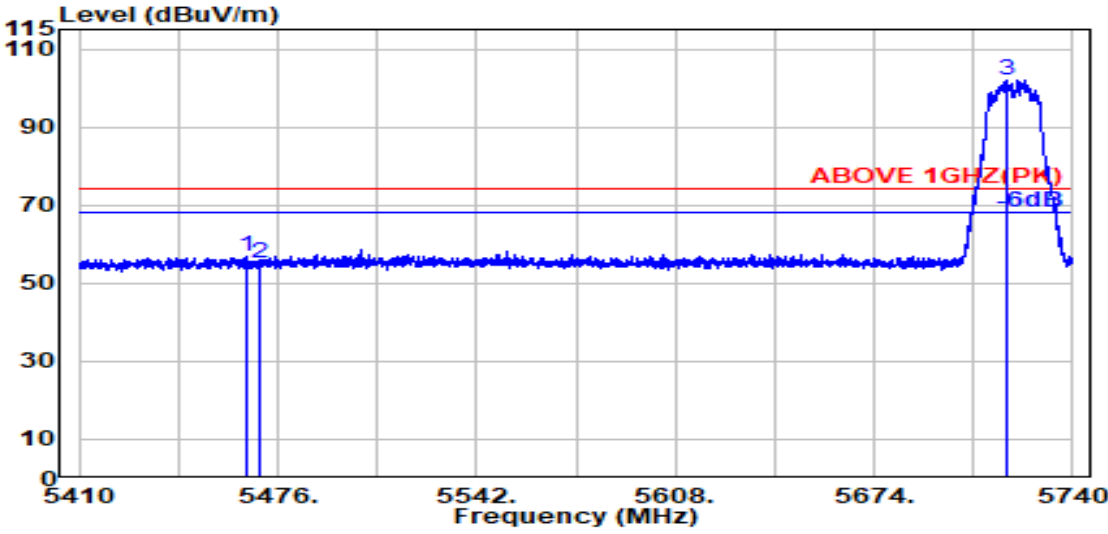

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.03	8.68	39.25	53.45	56.92	74.00	17.08	Peak
5470.000	34.04	8.69	39.25	51.57	55.05	74.00	18.95	Peak
@ 5718.000	33.60	8.92	39.29	98.92	102.15	---	---	Peak

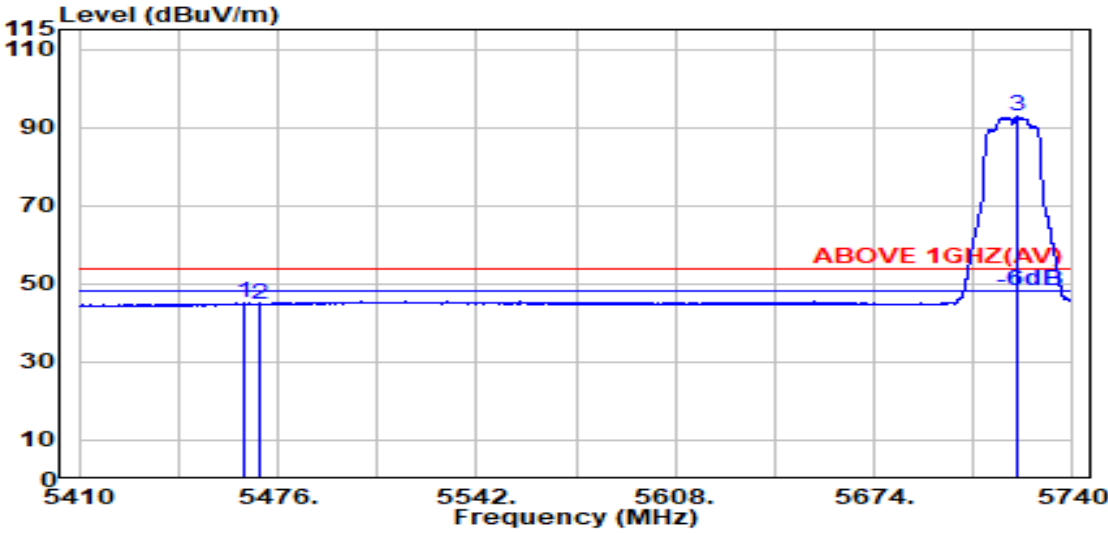


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.03	8.68	39.25	41.62	45.08	54.00	8.92	Average
5470.000	34.04	8.69	39.25	41.34	44.82	54.00	9.18	Average
@ 5721.800	33.60	8.92	39.29	89.44	92.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

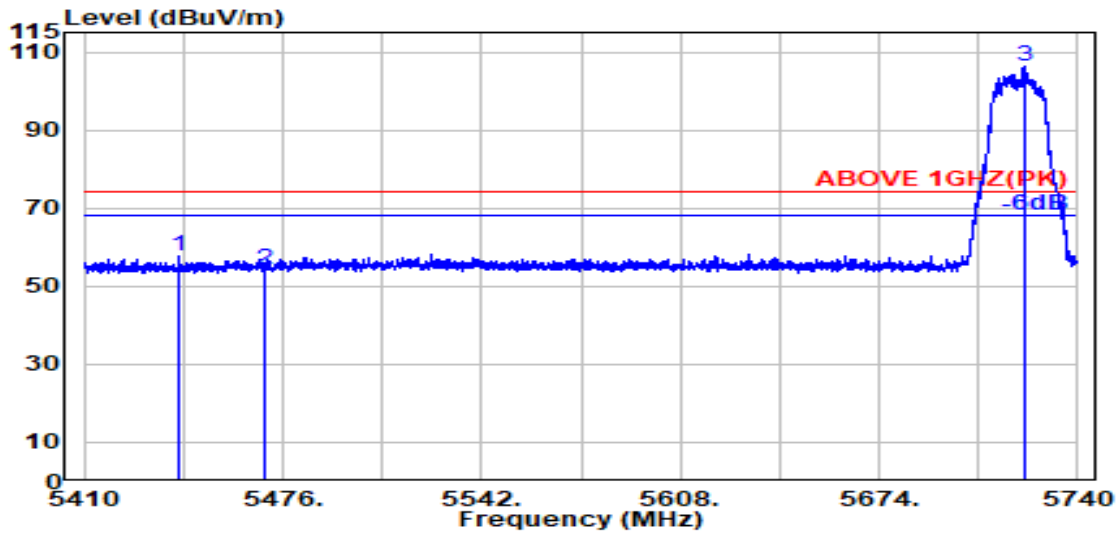

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.500	33.98	8.66	39.25	54.43	57.82	74.00	16.18	Peak
5470.000	34.04	8.69	39.25	50.81	54.28	74.00	19.72	Peak
@ 5722.000	33.60	8.92	39.29	103.28	106.51	---	---	Peak

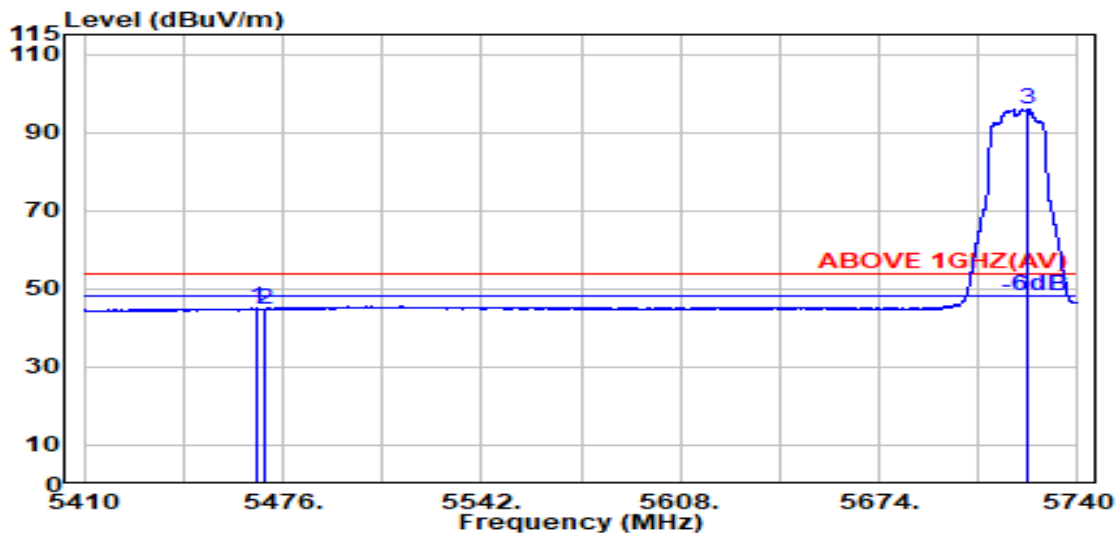


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.03	8.69	39.25	41.47	44.94	54.00	9.06	Average
5470.000	34.04	8.69	39.25	41.15	44.63	54.00	9.37	Average
@ 5723.100	33.60	8.92	39.29	92.80	96.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

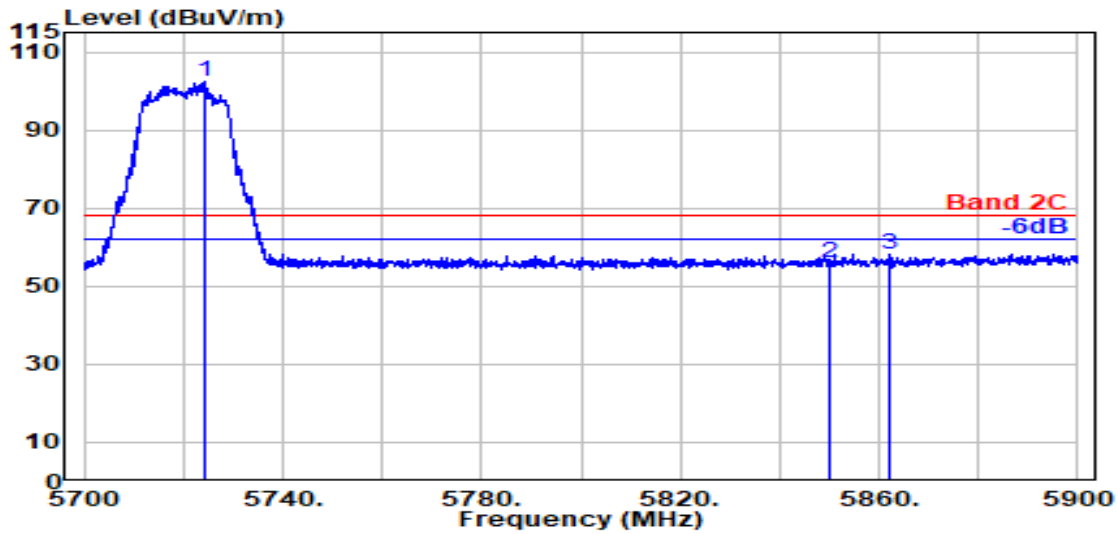

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.300	33.60	8.92	39.29	99.25	102.48	---	---	Peak
5850.000	33.90	9.04	39.31	52.55	56.18	68.20	12.02	Peak
5862.300	33.95	9.05	39.32	54.64	58.32	68.20	9.88	Peak

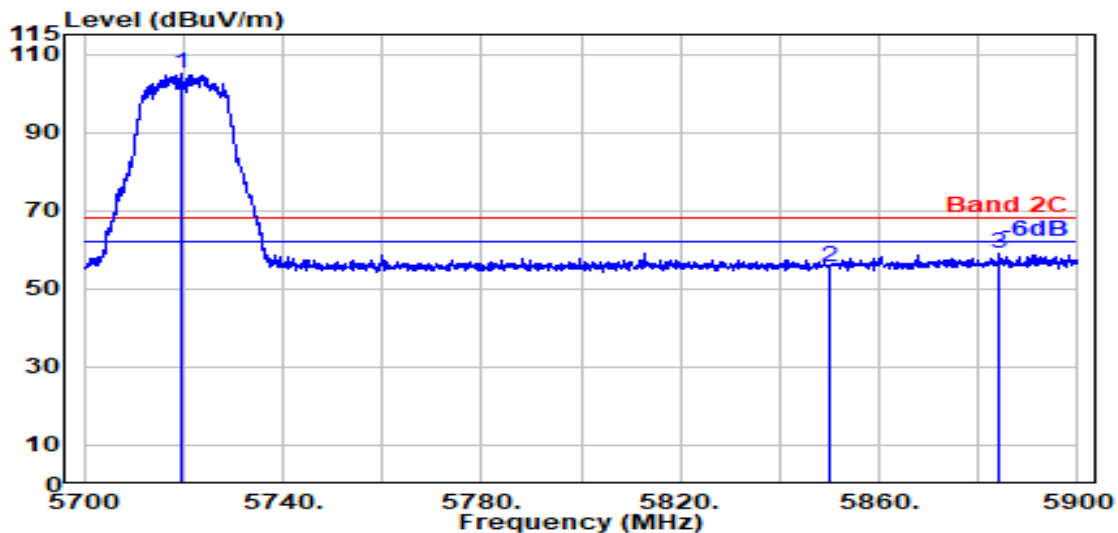


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.500	33.60	8.92	39.29	101.72	104.95	---	---	Peak
5850.000	33.90	9.04	39.31	51.82	55.44	68.20	12.76	Peak
5884.300	34.04	9.07	39.32	55.41	59.20	68.20	9.00	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

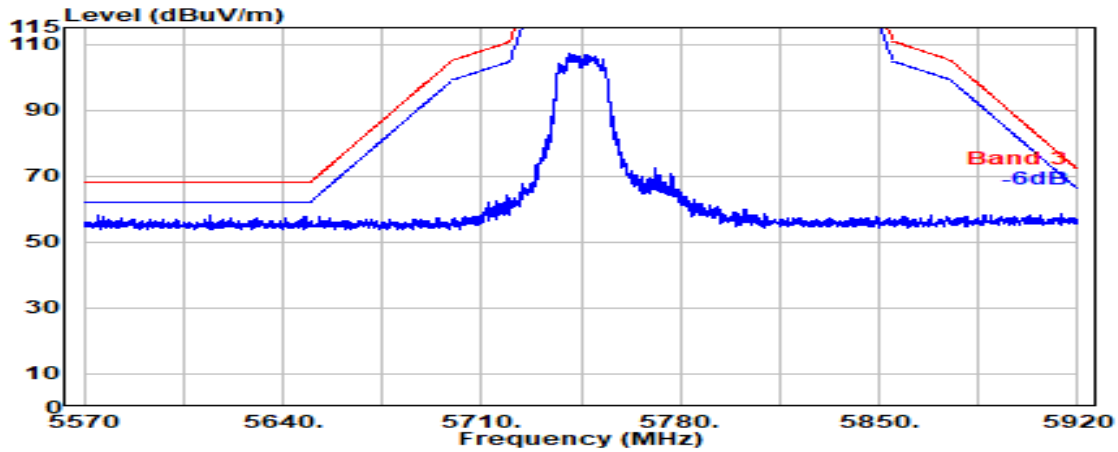


Antenna at Vertical Polarization

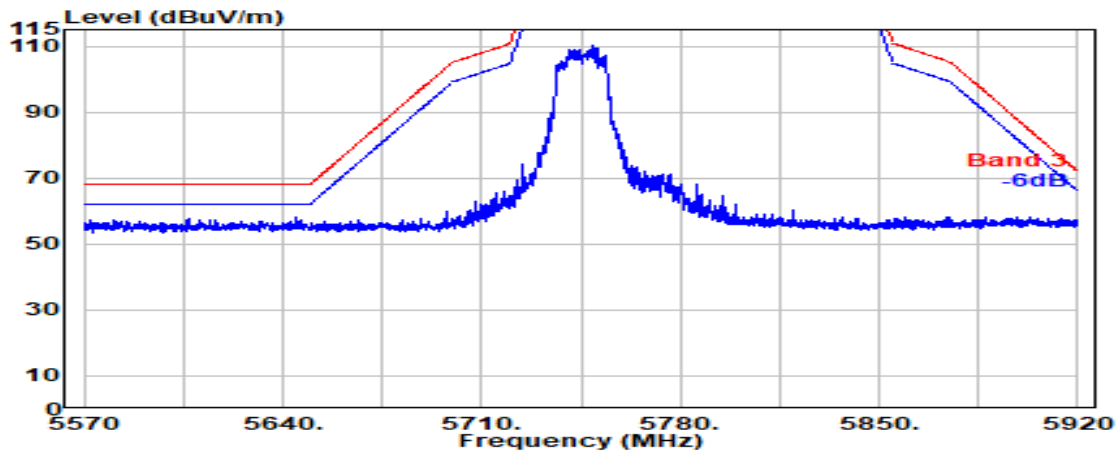


Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

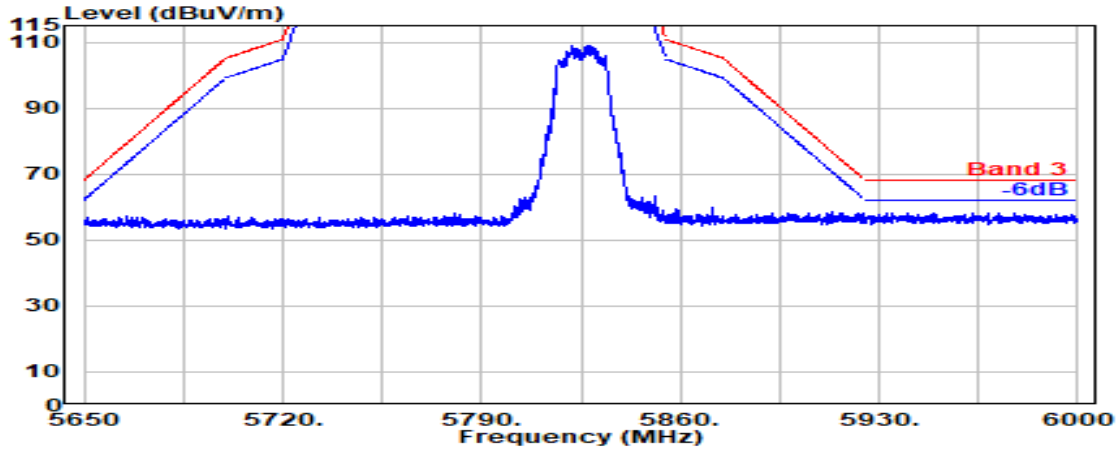

Antenna at Vertical Polarization

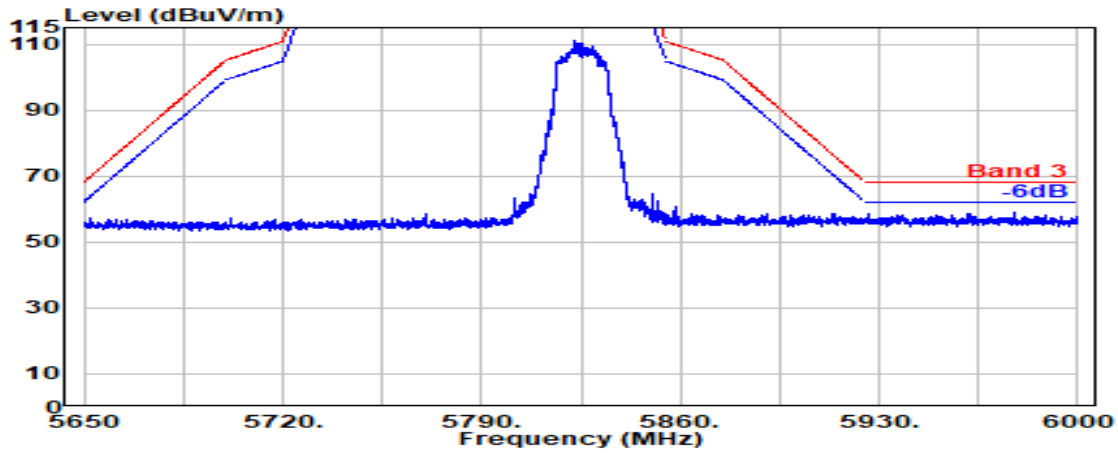


Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

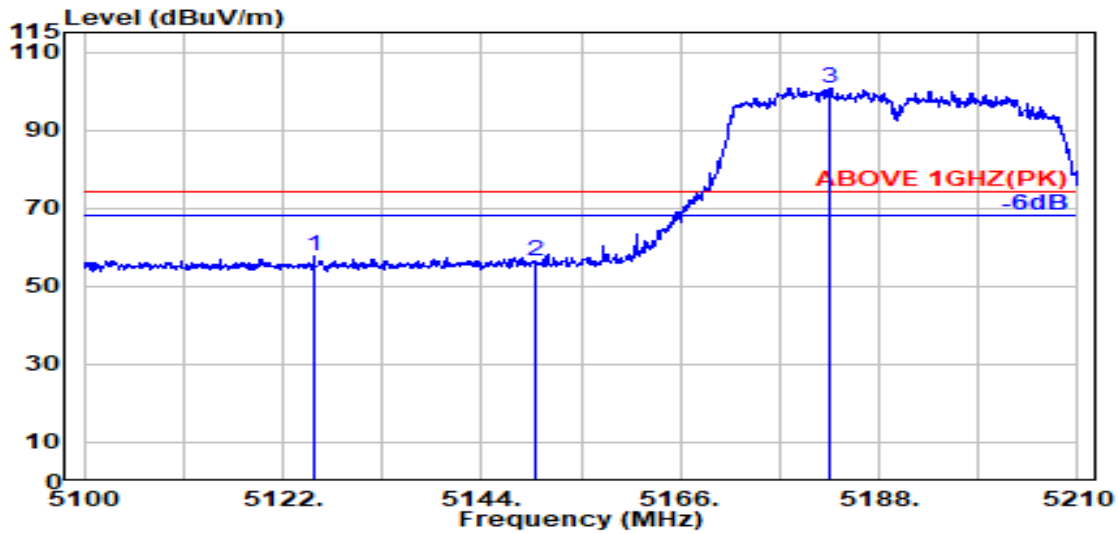

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5125.500	33.45	8.35	39.27	54.99	57.52	74.00	16.48	Peak
5150.000	33.50	8.37	39.27	53.96	56.57	74.00	17.43	Peak
@ 5182.400	33.69	8.41	39.27	97.92	100.75	---	---	Peak

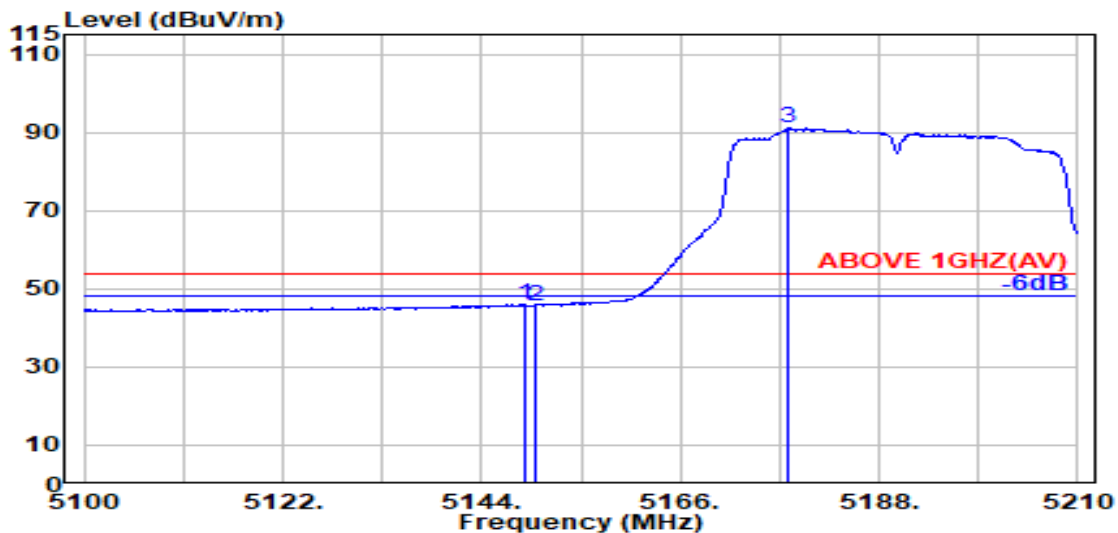


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.700	33.50	8.37	39.27	43.33	45.93	54.00	8.07	Average
5150.000	33.50	8.37	39.27	43.08	45.68	54.00	8.32	Average
@ 5178.000	33.67	8.40	39.27	88.22	91.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

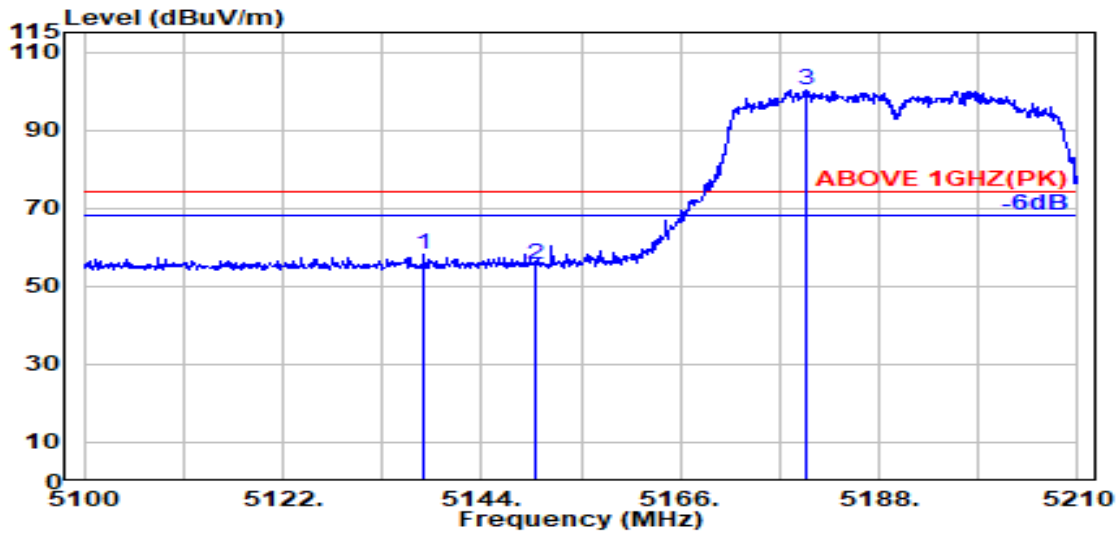

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.700	33.48	8.36	39.27	55.75	58.32	74.00	15.68	Peak
5150.000	33.50	8.37	39.27	52.89	55.49	74.00	18.51	Peak
@ 5179.900	33.68	8.40	39.27	97.23	100.05	---	---	Peak

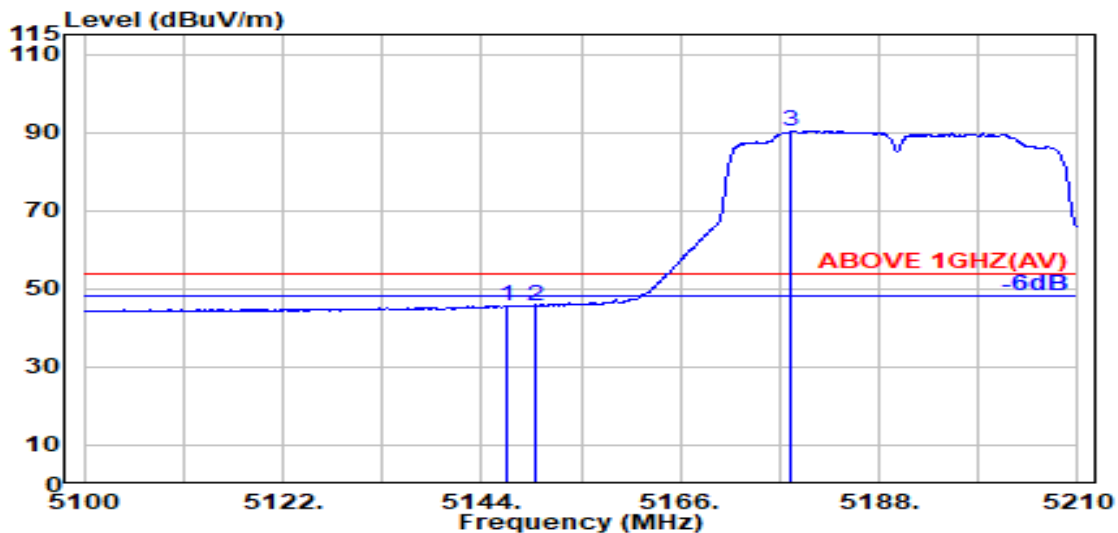


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	33.49	8.37	39.27	43.15	45.74	54.00	8.26	Average
5150.000	33.50	8.37	39.27	43.00	45.61	54.00	8.39	Average
@ 5178.200	33.67	8.40	39.27	87.57	90.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

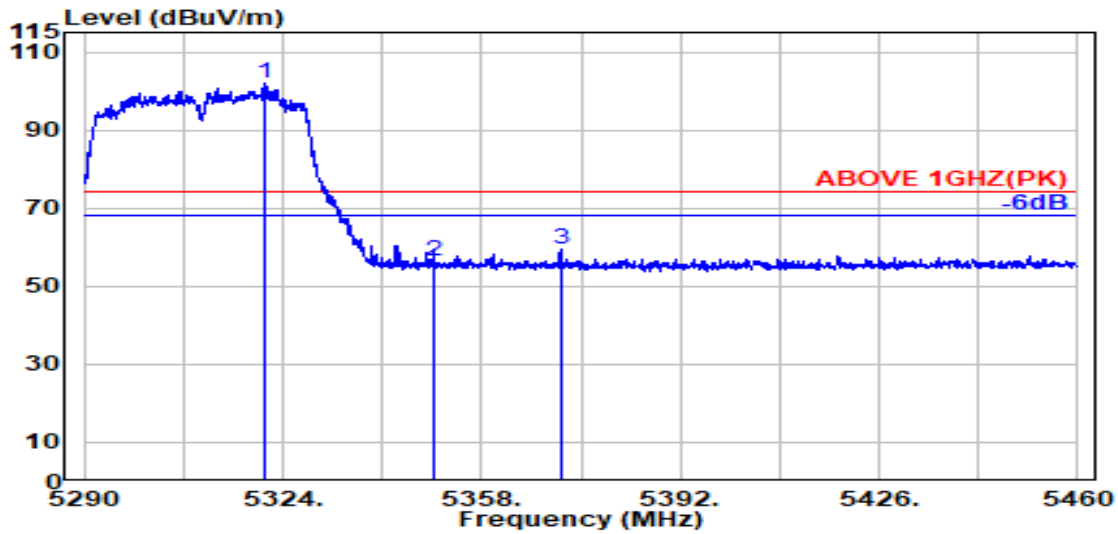

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.700	33.76	8.54	39.26	98.75	101.79	---	---	Peak
5350.000	33.70	8.57	39.26	53.40	56.42	74.00	17.58	Peak
5371.500	33.79	8.59	39.26	56.30	59.42	74.00	14.58	Peak

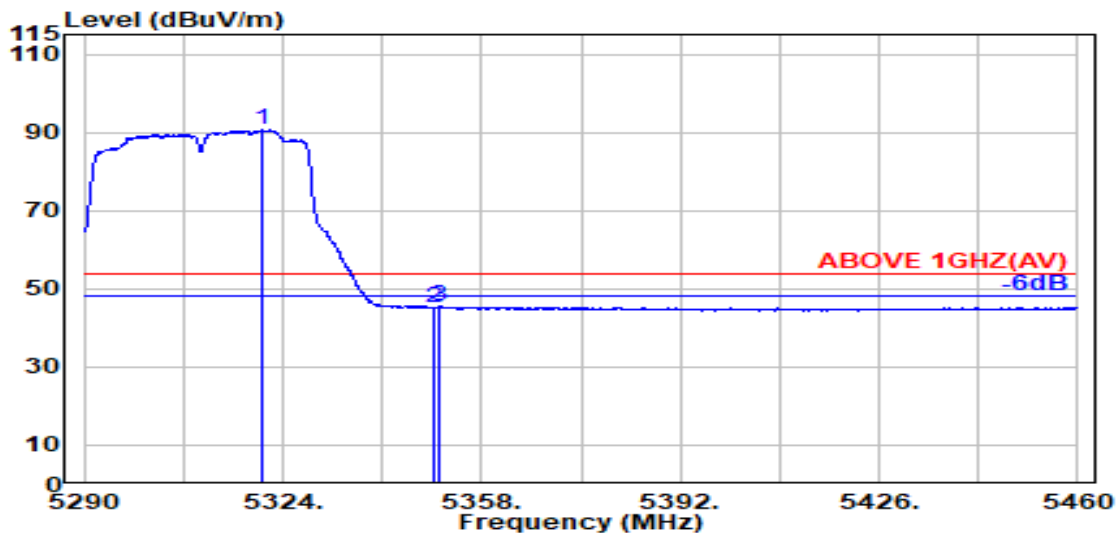


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.400	33.76	8.54	39.26	87.70	90.75	---	---	Average
5350.000	33.70	8.57	39.26	42.09	45.10	54.00	8.90	Average
5350.700	33.70	8.57	39.26	42.36	45.38	54.00	8.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

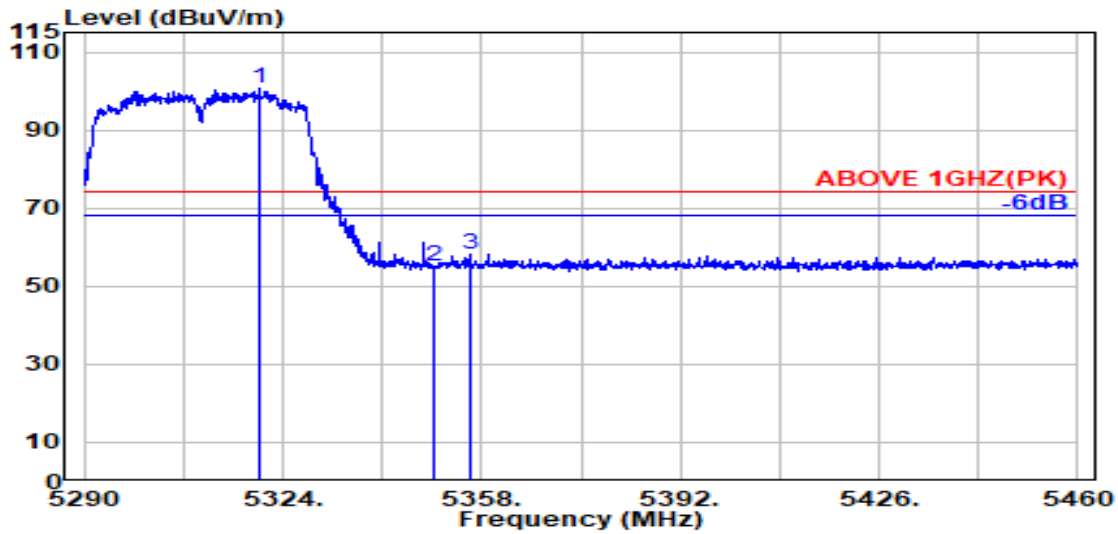

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.000	33.76	8.54	39.26	97.50	100.54	---	---	Peak
5350.000	33.70	8.57	39.26	52.30	55.31	74.00	18.69	Peak
5355.900	33.72	8.58	39.26	55.01	58.06	74.00	15.94	Peak

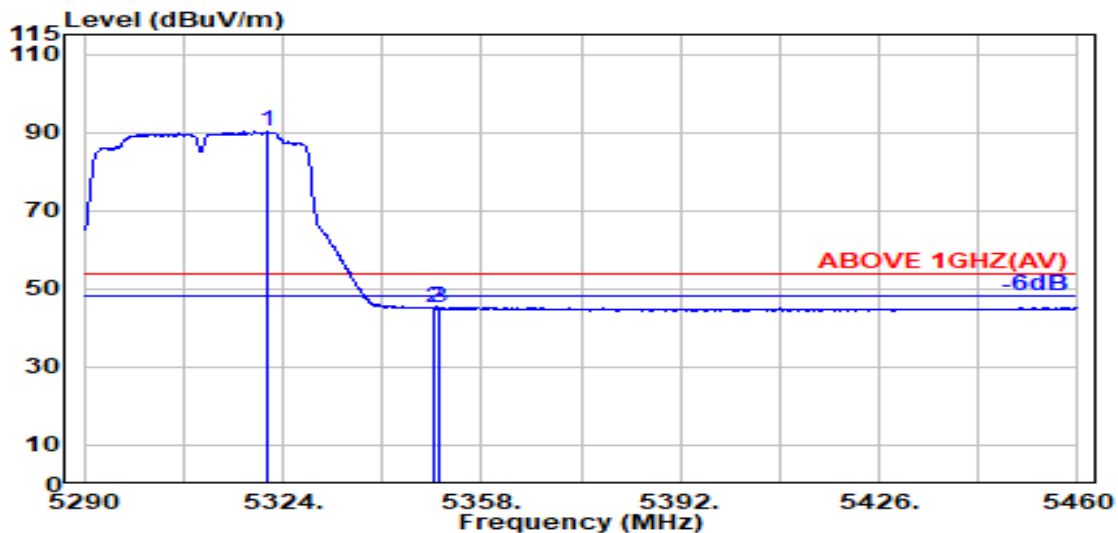


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.500	33.76	8.54	39.26	87.06	90.10	---	---	Average
5350.000	33.70	8.57	39.26	42.18	45.20	54.00	8.80	Average
5350.900	33.70	8.57	39.26	42.20	45.22	54.00	8.78	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

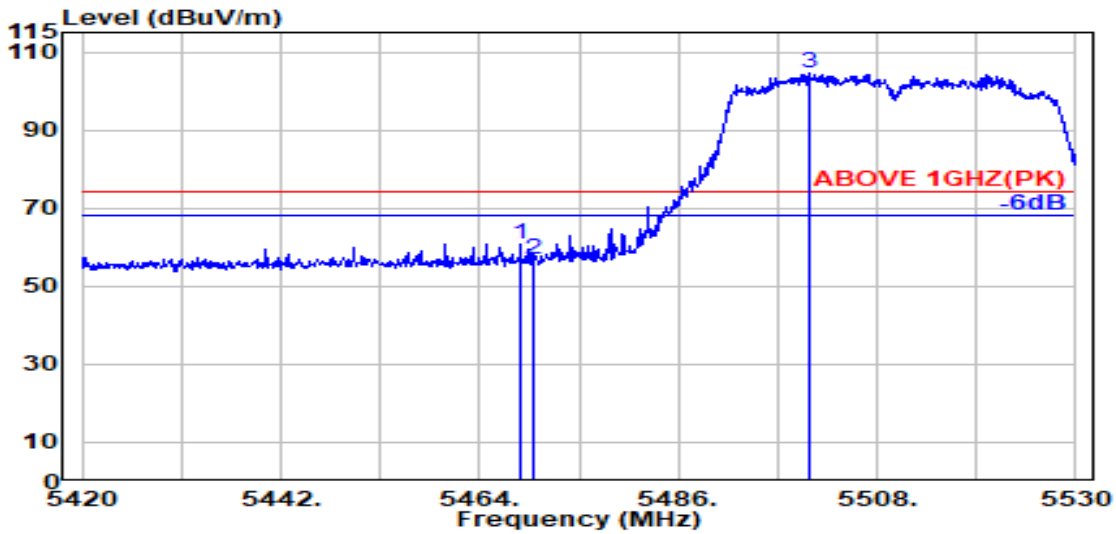

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.25	57.29	60.77	74.00	13.23	Peak
5470.000	34.04	8.69	39.25	53.42	56.90	74.00	17.10	Peak
@ 5500.600	34.10	8.72	39.25	101.19	104.75	---	---	Peak

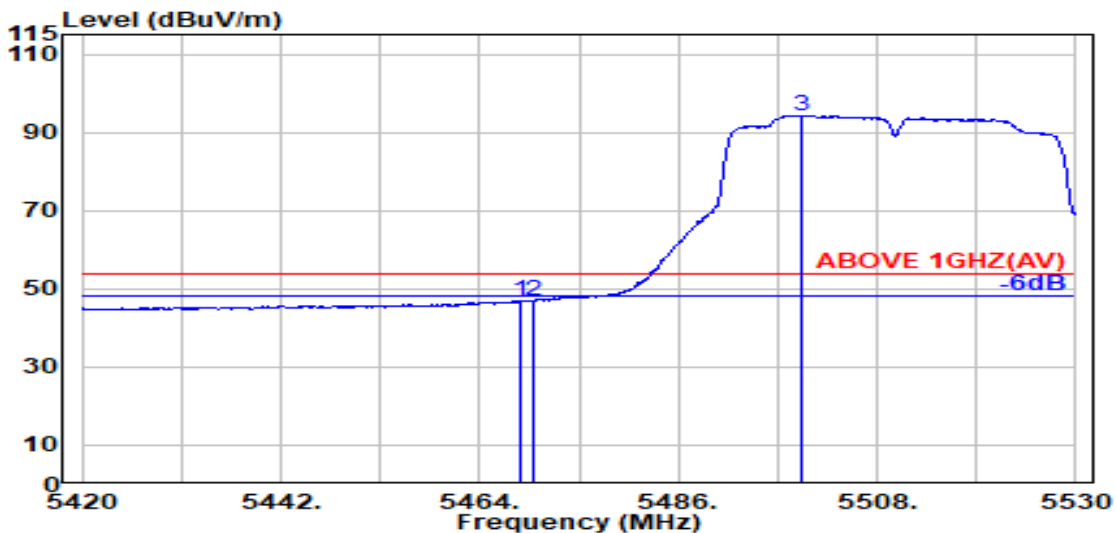


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.25	43.34	46.81	54.00	7.19	Average
5470.000	34.04	8.69	39.25	43.49	46.97	54.00	7.03	Average
@ 5499.700	34.10	8.72	39.25	90.78	94.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

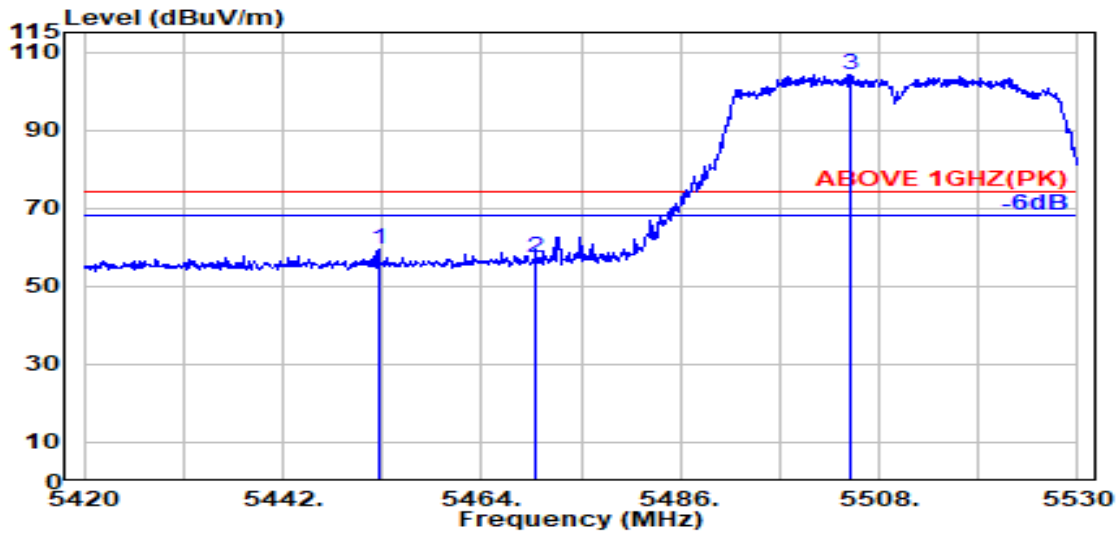

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.600	34.01	8.67	39.25	56.18	59.60	74.00	14.40	Peak
5470.000	34.04	8.69	39.25	53.73	57.21	74.00	16.79	Peak
@ 5504.900	34.09	8.72	39.25	100.66	104.22	---	---	Peak

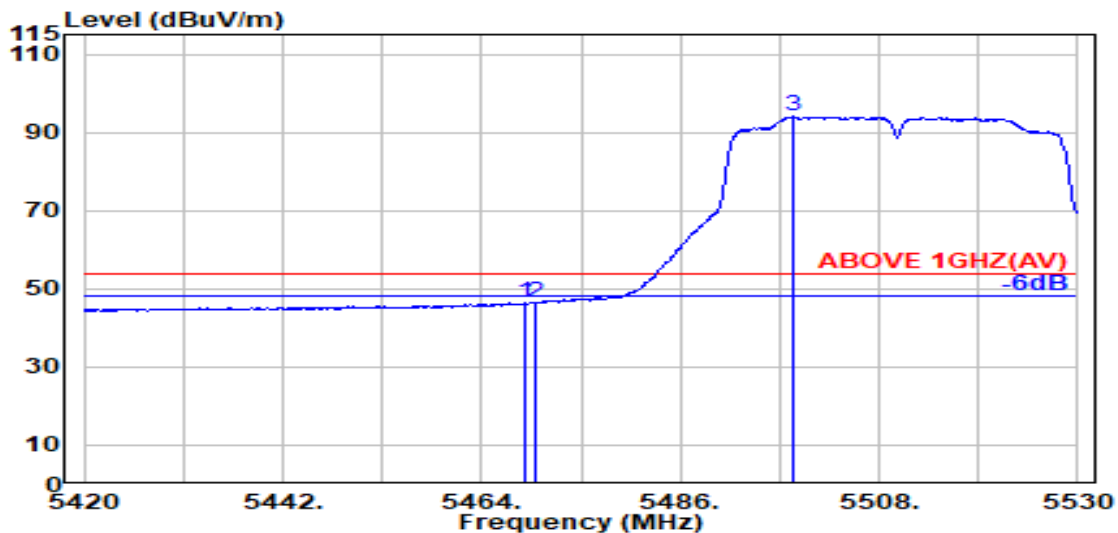


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.25	42.86	46.34	54.00	7.66	Average
5470.000	34.04	8.69	39.25	43.04	46.52	54.00	7.48	Average
@ 5498.400	34.10	8.72	39.25	90.54	94.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

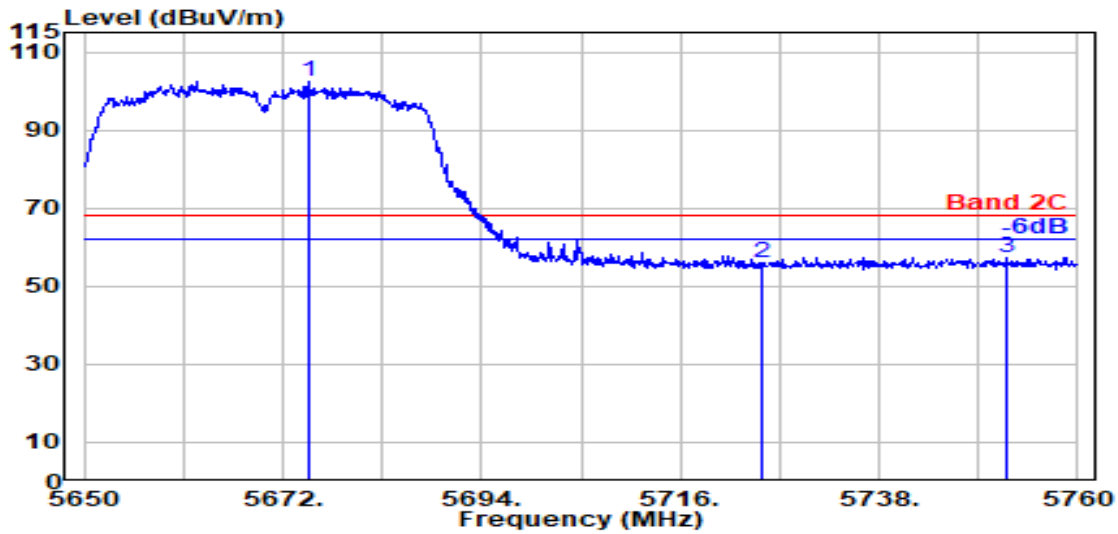

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.800	33.70	8.88	39.28	99.22	102.51	---	---	Peak
5725.000	33.60	8.93	39.29	52.65	55.88	68.20	12.32	Peak
5752.100	33.61	8.95	39.30	54.12	57.39	68.20	10.81	Peak

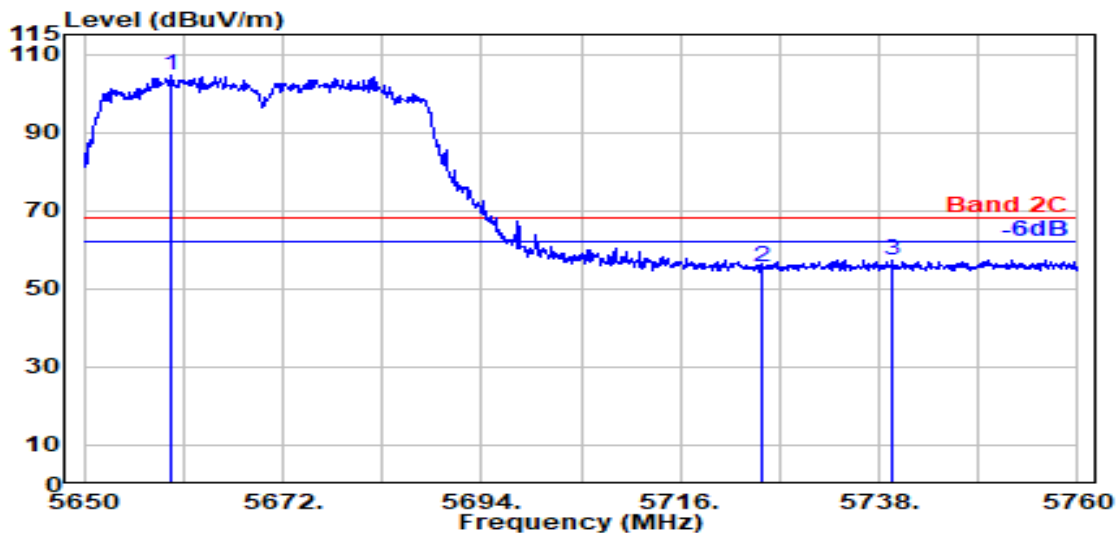


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.500	33.76	8.87	39.28	101.25	104.60	---	---	Peak
5725.000	33.60	8.93	39.29	52.39	55.63	68.20	12.57	Peak
5739.400	33.60	8.94	39.29	54.23	57.48	68.20	10.72	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

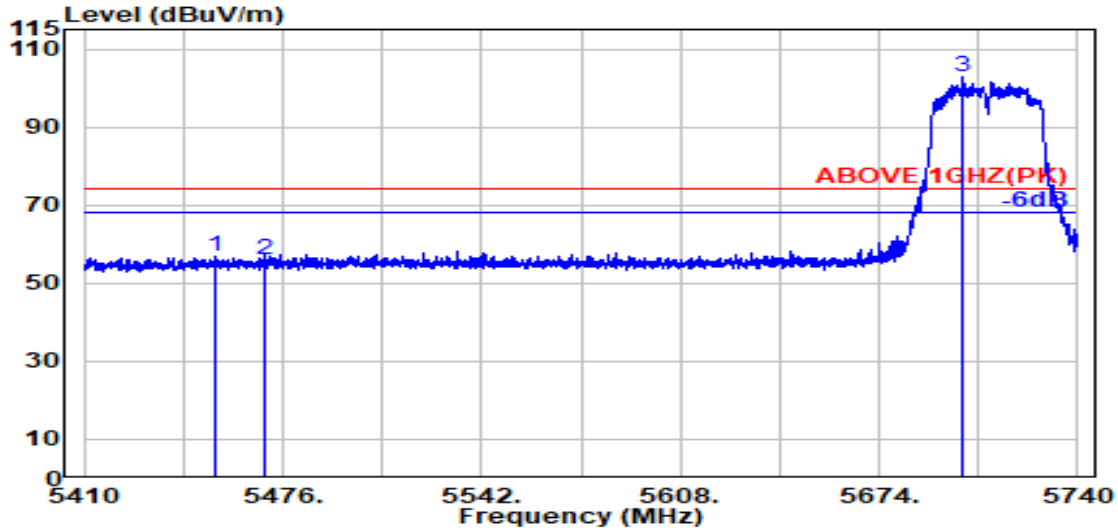

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.500	34.01	8.67	39.25	53.45	56.87	74.00	17.13	Peak
5470.000	34.04	8.69	39.25	52.29	55.77	74.00	18.23	Peak
@ 5701.600	33.60	8.90	39.29	99.84	103.05	---	---	Peak

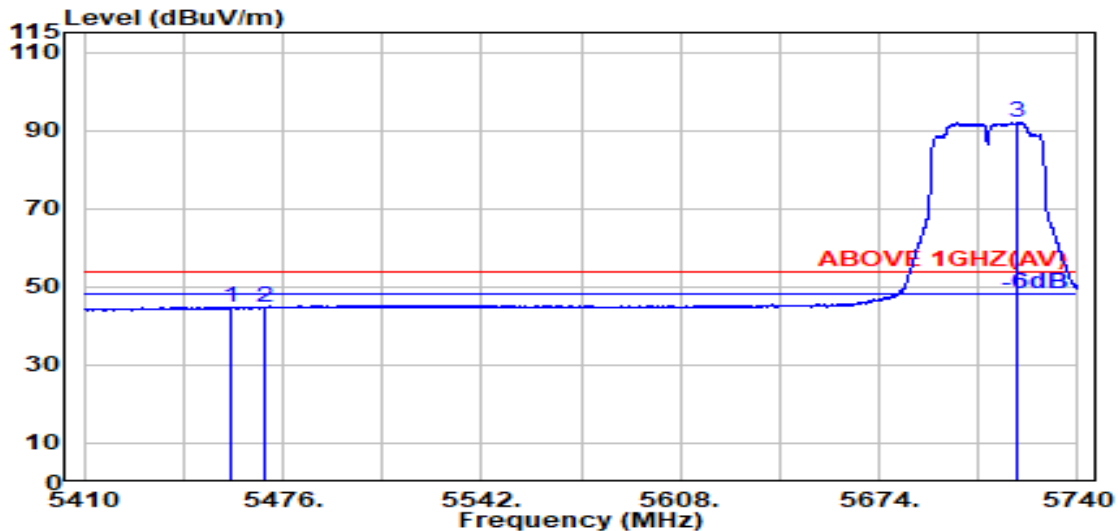


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.100	34.02	8.68	39.25	41.37	44.81	54.00	9.19	Average
5470.000	34.04	8.69	39.25	41.15	44.63	54.00	9.37	Average
@ 5719.800	33.60	8.92	39.29	88.81	92.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

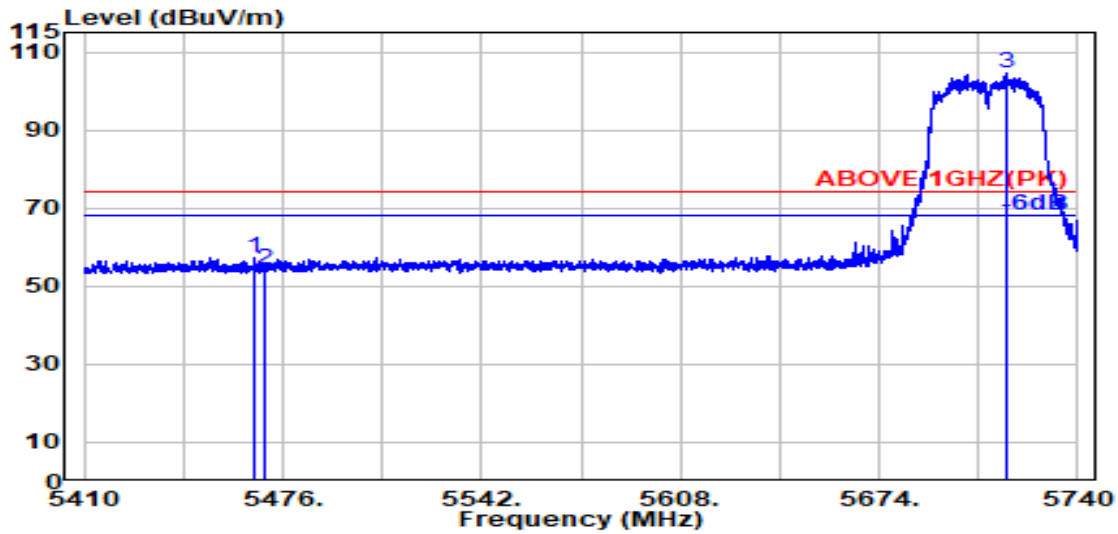

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.03	8.68	39.25	53.84	57.31	74.00	16.69	Peak
5470.000	34.04	8.69	39.25	50.61	54.08	74.00	19.92	Peak
@ 5716.100	33.60	8.92	39.29	101.21	104.44	---	---	Peak

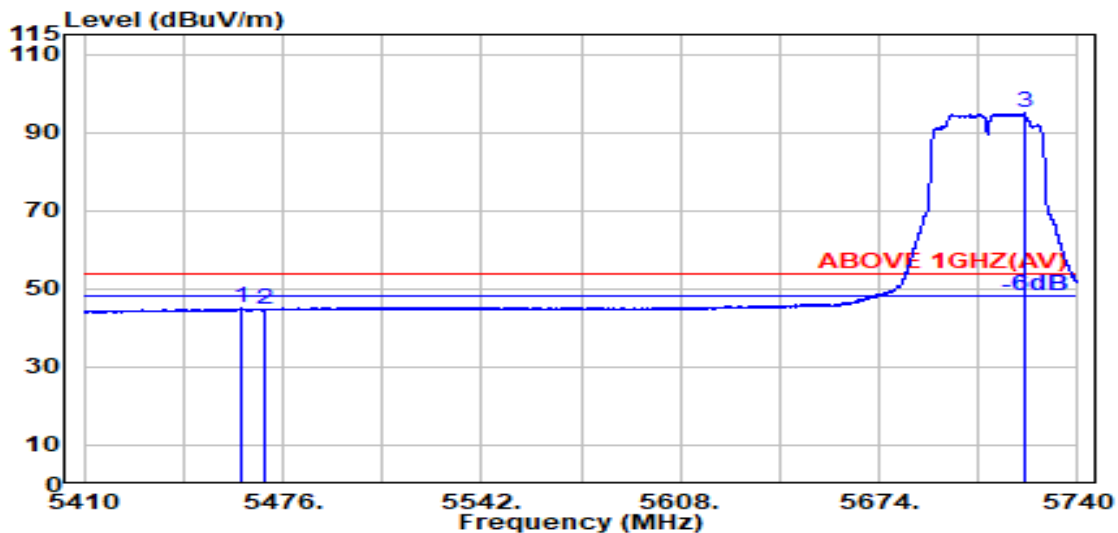


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.100	34.02	8.68	39.25	41.51	44.96	54.00	9.04	Average
5470.000	34.04	8.69	39.25	41.19	44.67	54.00	9.33	Average
@ 5722.000	33.60	8.92	39.29	91.62	94.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

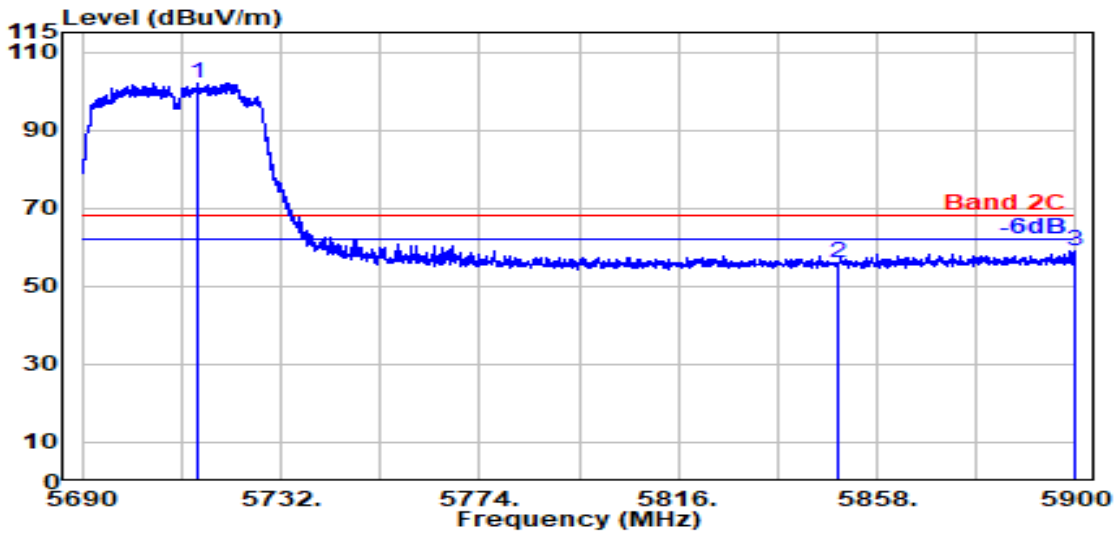

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.500	33.60	8.92	39.29	98.91	102.14	---	---	Peak
5850.000	33.90	9.04	39.31	52.51	56.13	68.20	12.07	Peak
5899.800	34.10	9.08	39.32	55.27	59.13	68.20	9.07	Peak

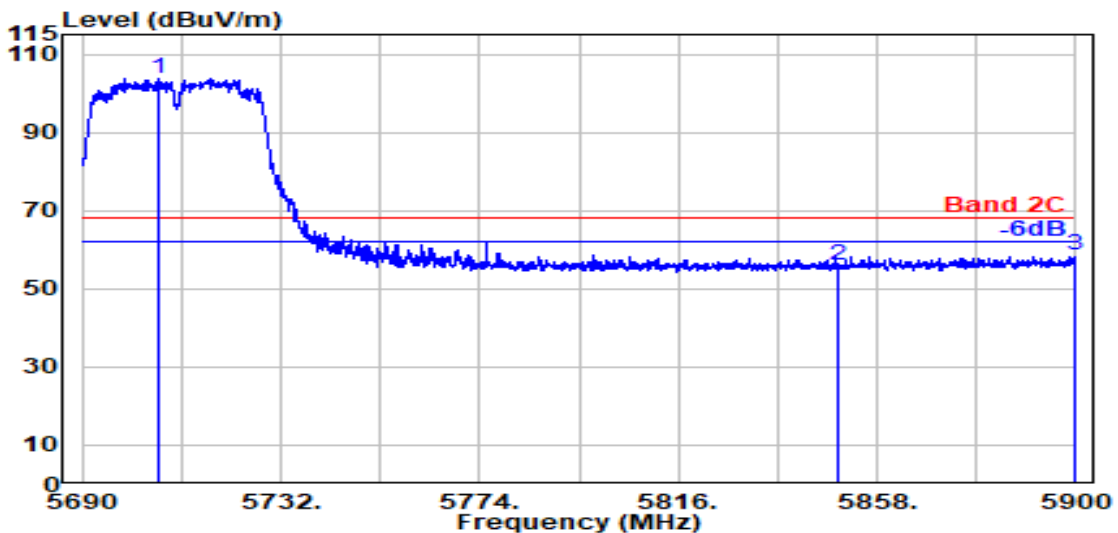


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.300	33.60	8.91	39.29	100.69	103.91	---	---	Peak
5850.000	33.90	9.04	39.31	52.22	55.84	68.20	12.36	Peak
5900.000	34.10	9.08	39.32	54.83	58.69	68.20	9.51	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

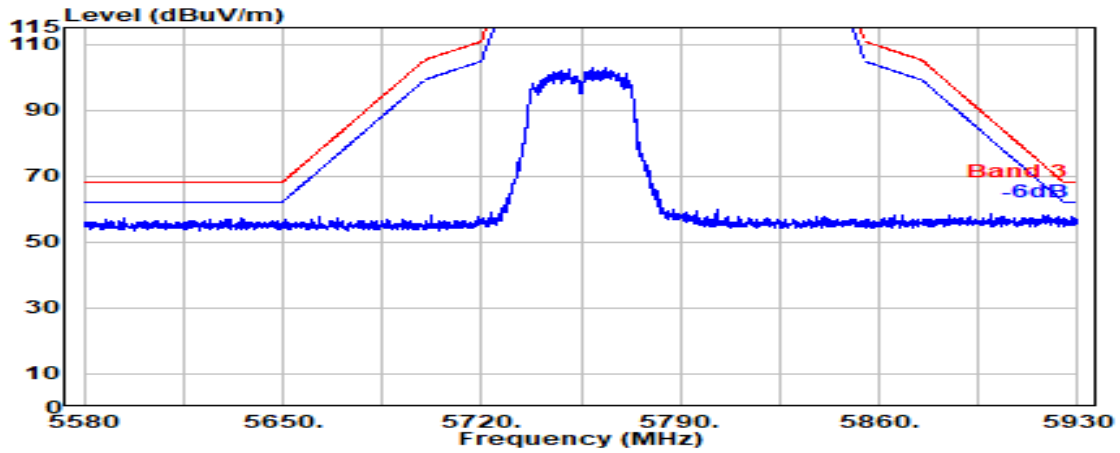


Antenna at Vertical Polarization

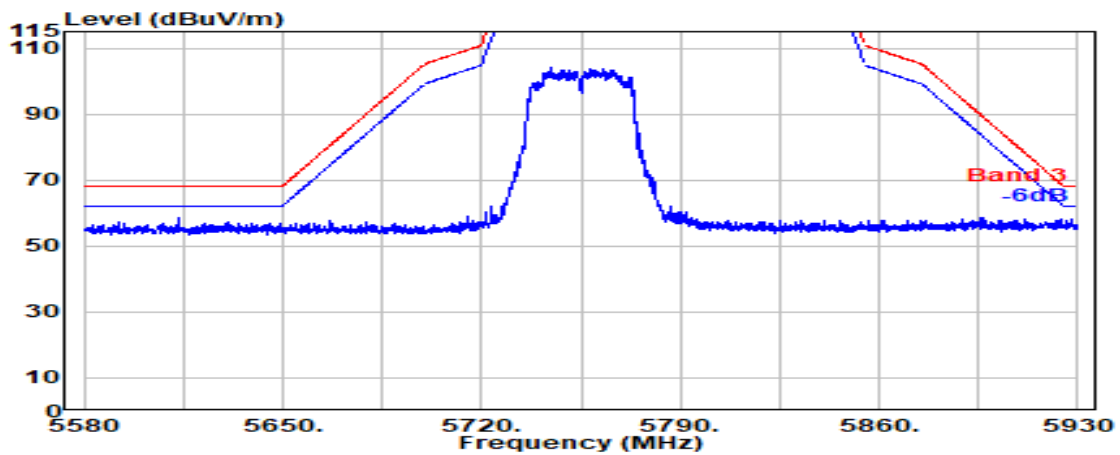


Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

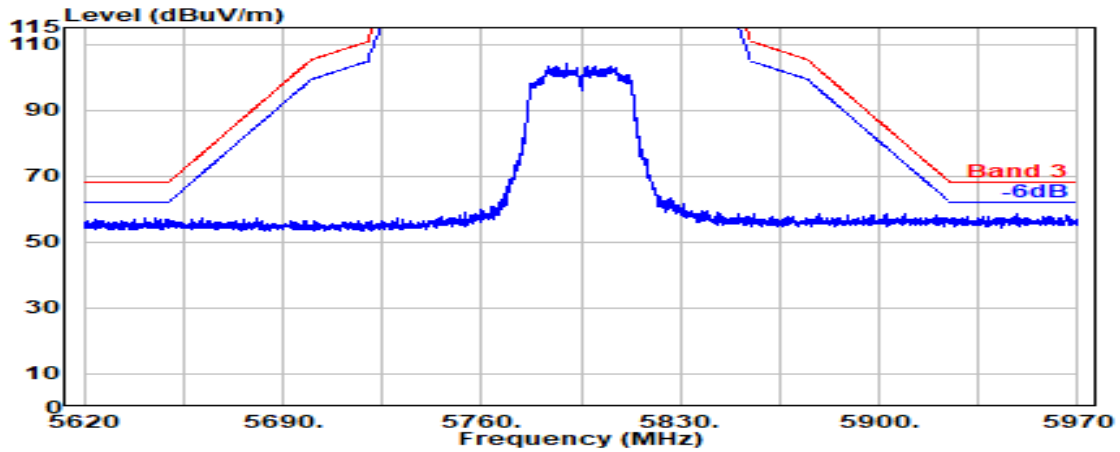

Antenna at Vertical Polarization

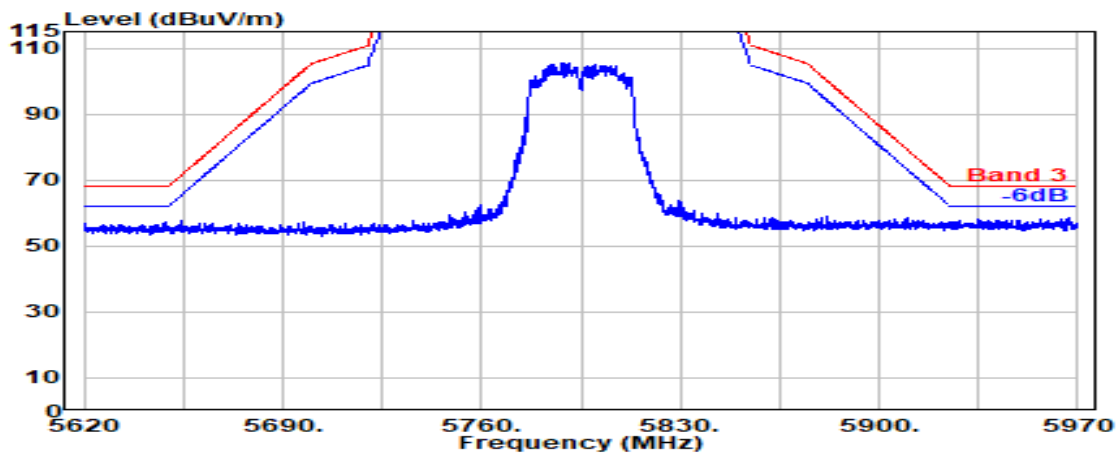


Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

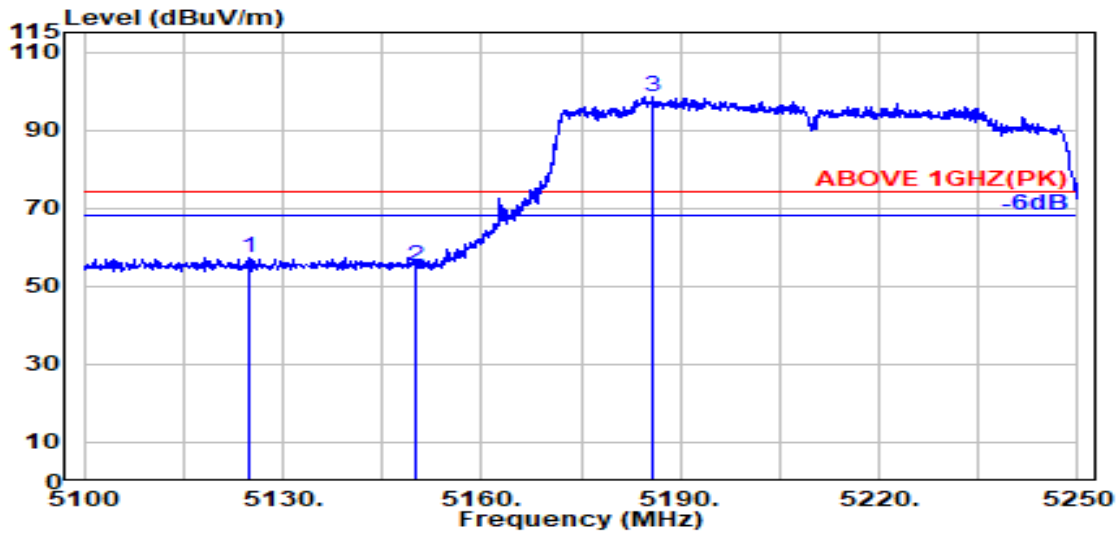

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.000	33.45	8.35	39.27	54.89	57.41	74.00	16.59	Peak
5150.000	33.50	8.37	39.27	52.47	55.08	74.00	18.92	Peak
@ 5186.000	33.72	8.41	39.27	95.75	98.61	---	---	Peak

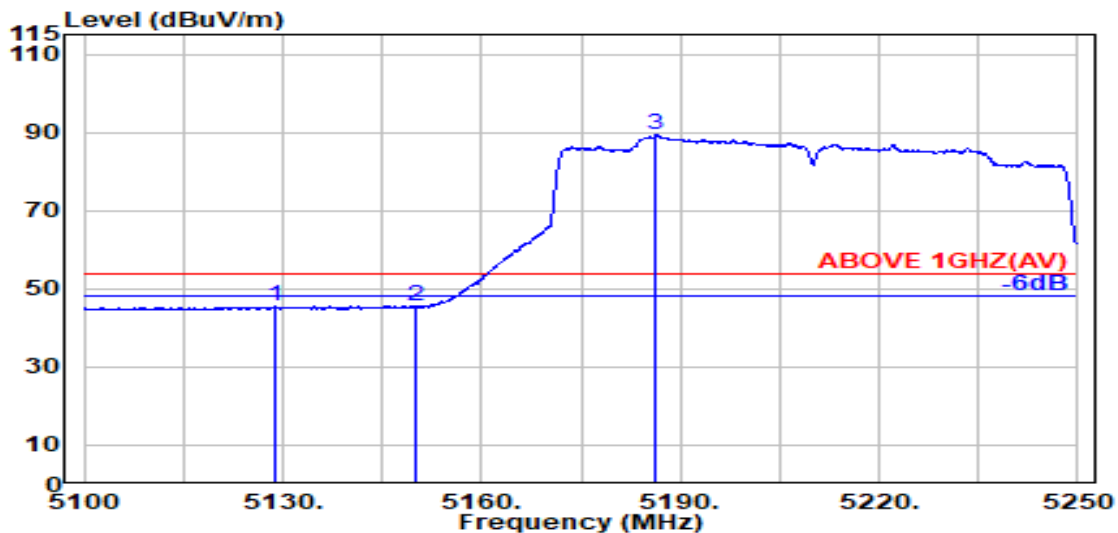


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.000	33.46	8.35	39.27	42.98	45.52	54.00	8.48	Average
5150.000	33.50	8.37	39.27	42.78	45.38	54.00	8.62	Average
@ 5186.300	33.72	8.41	39.27	86.45	89.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

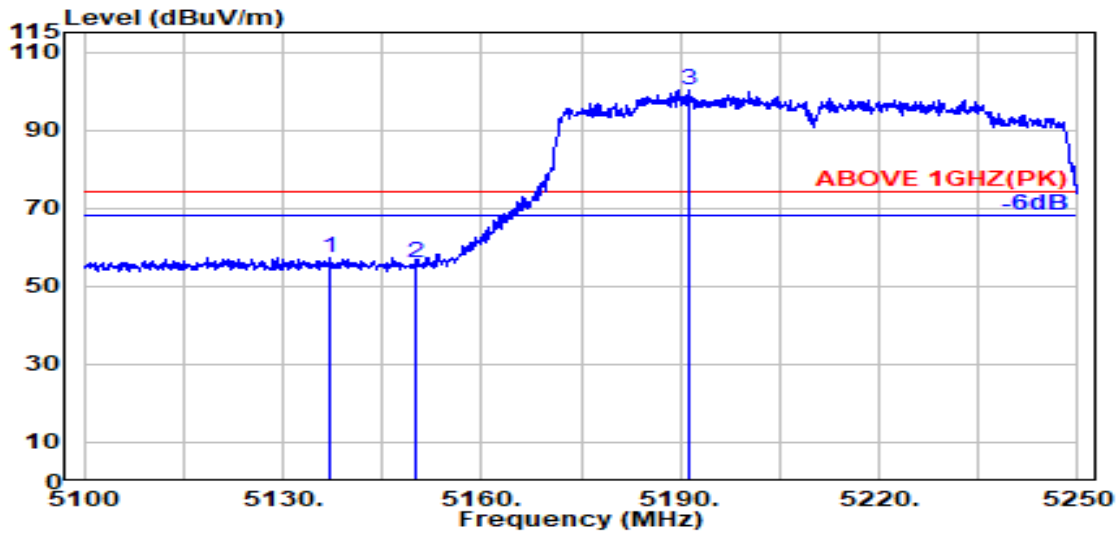

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.000	33.47	8.36	39.27	54.78	57.35	74.00	16.65	Peak
5150.000	33.50	8.37	39.27	53.21	55.81	74.00	18.19	Peak
@ 5191.500	33.75	8.42	39.27	97.53	100.43	---	---	Peak

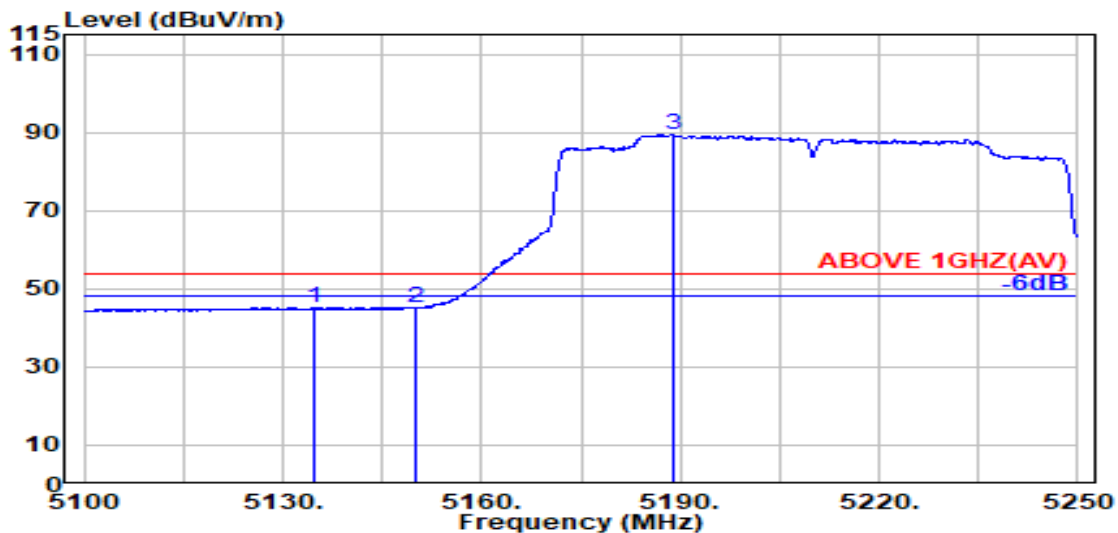


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.700	33.47	8.36	39.27	42.78	45.34	54.00	8.66	Average
5150.000	33.50	8.37	39.27	42.33	44.93	54.00	9.07	Average
@ 5189.000	33.73	8.41	39.27	86.53	89.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

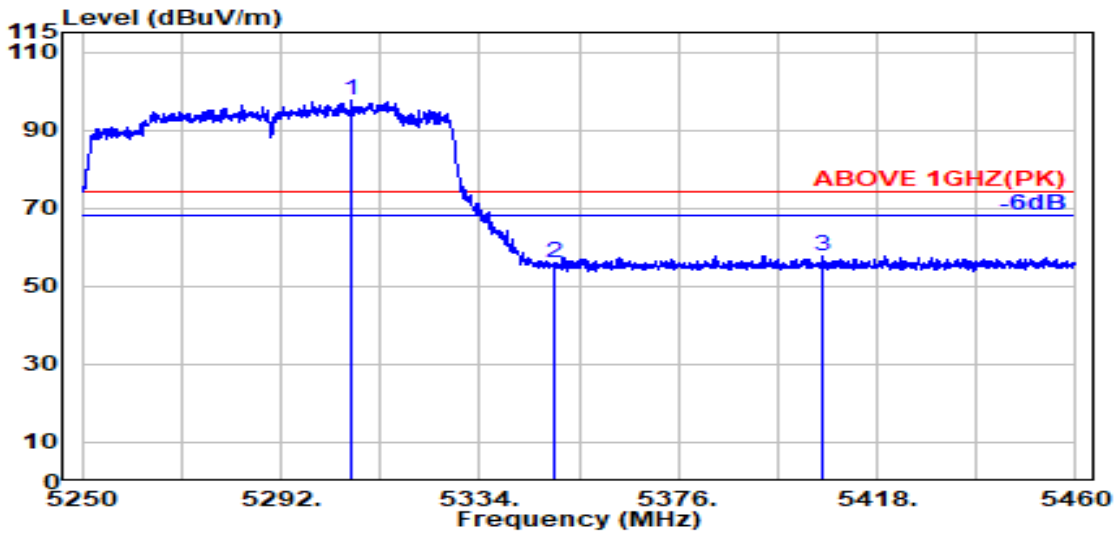

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.800	33.79	8.53	39.26	94.39	97.44	---	---	Peak
5350.000	33.70	8.57	39.26	53.08	56.10	74.00	17.90	Peak
5406.600	33.91	8.63	39.26	54.33	57.62	74.00	16.38	Peak

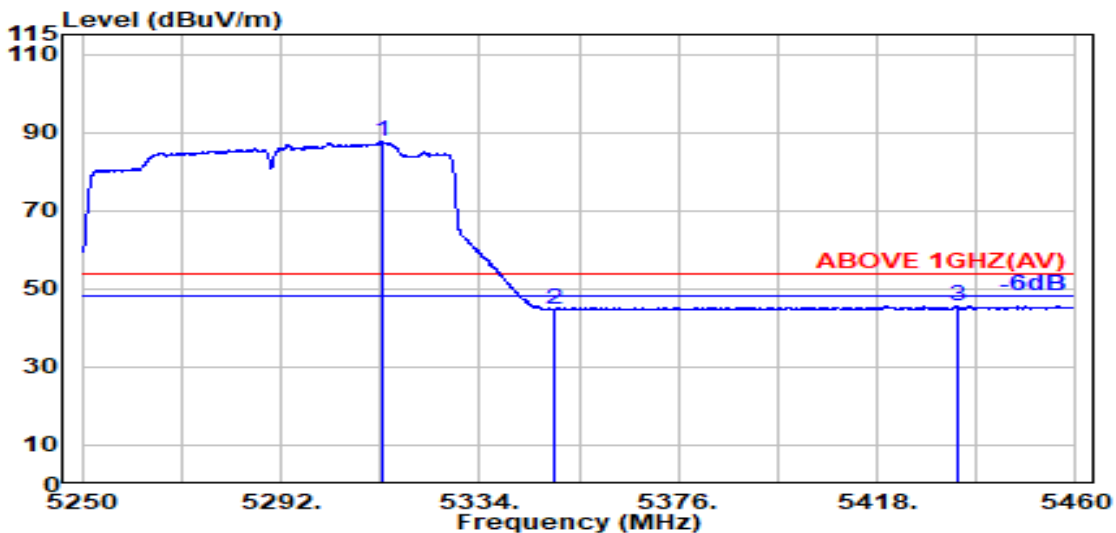


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.400	33.77	8.54	39.26	84.74	87.79	---	---	Average
5350.000	33.70	8.57	39.26	41.62	44.63	54.00	9.37	Average
5434.800	33.97	8.65	39.25	42.27	45.64	54.00	8.36	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

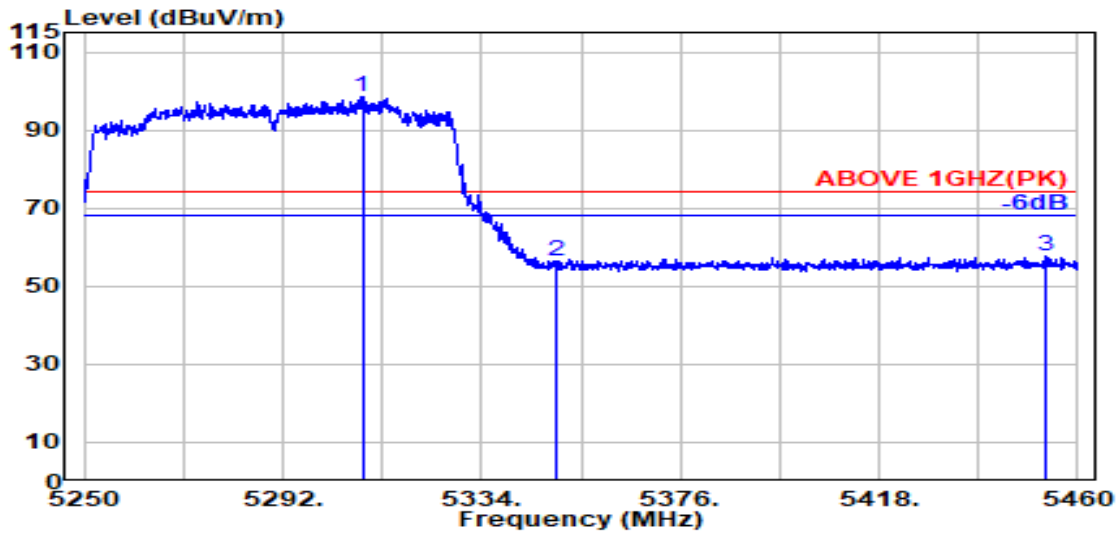

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.800	33.78	8.53	39.26	95.64	98.70	---	---	Peak
5350.000	33.70	8.57	39.26	53.62	56.63	74.00	17.37	Peak
5453.400	34.01	8.67	39.25	54.45	57.87	74.00	16.13	Peak

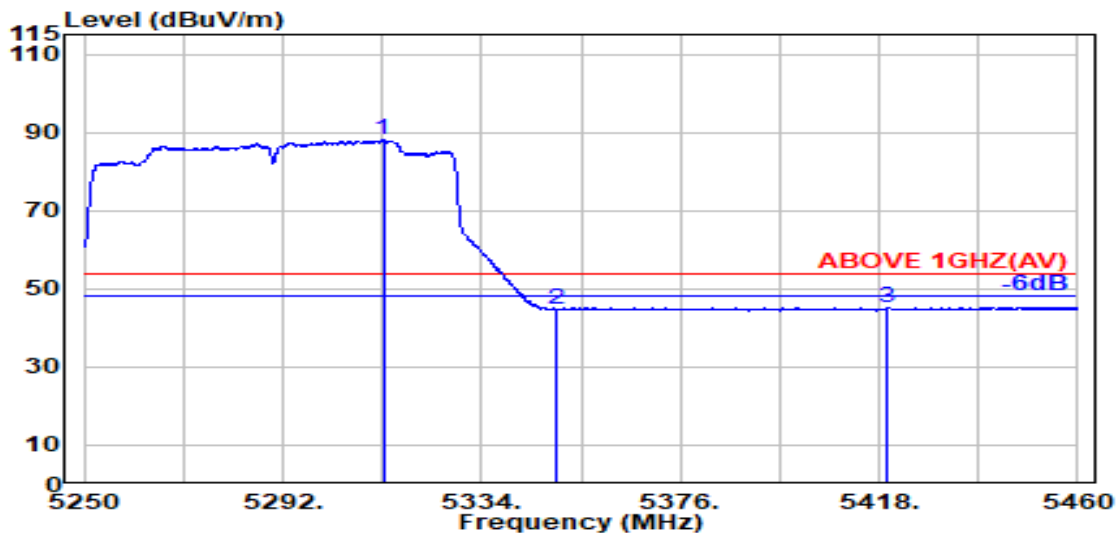


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.200	33.77	8.54	39.26	85.05	88.10	---	---	Average
5350.000	33.70	8.57	39.26	41.78	44.80	54.00	9.20	Average
5419.800	33.94	8.64	39.25	41.87	45.20	54.00	8.80	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

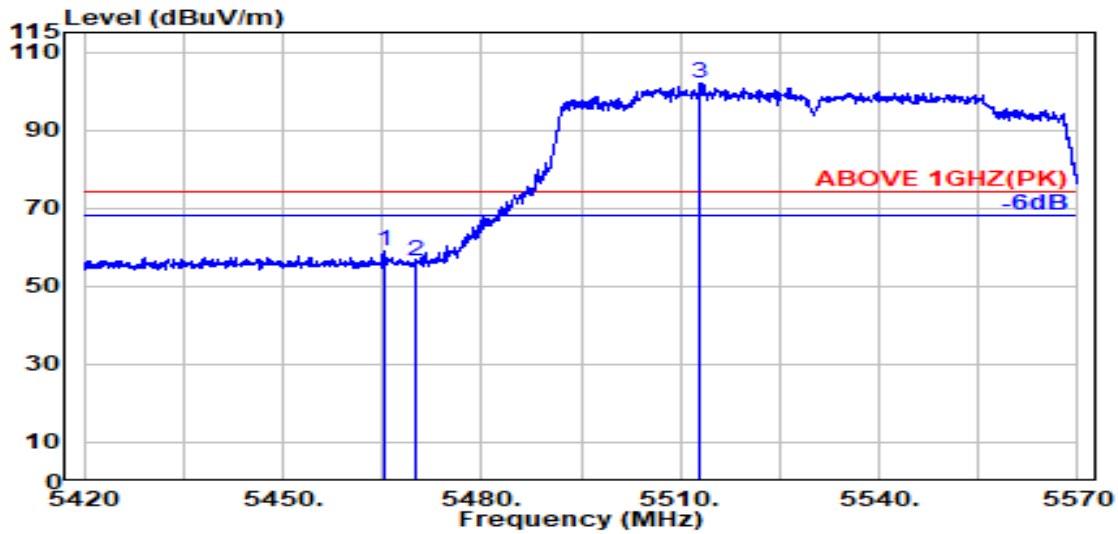

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.03	8.68	39.25	55.50	58.96	74.00	15.04	Peak
5470.000	34.04	8.69	39.25	52.96	56.44	74.00	17.56	Peak
@ 5513.000	34.07	8.73	39.25	98.49	102.04	---	---	Peak

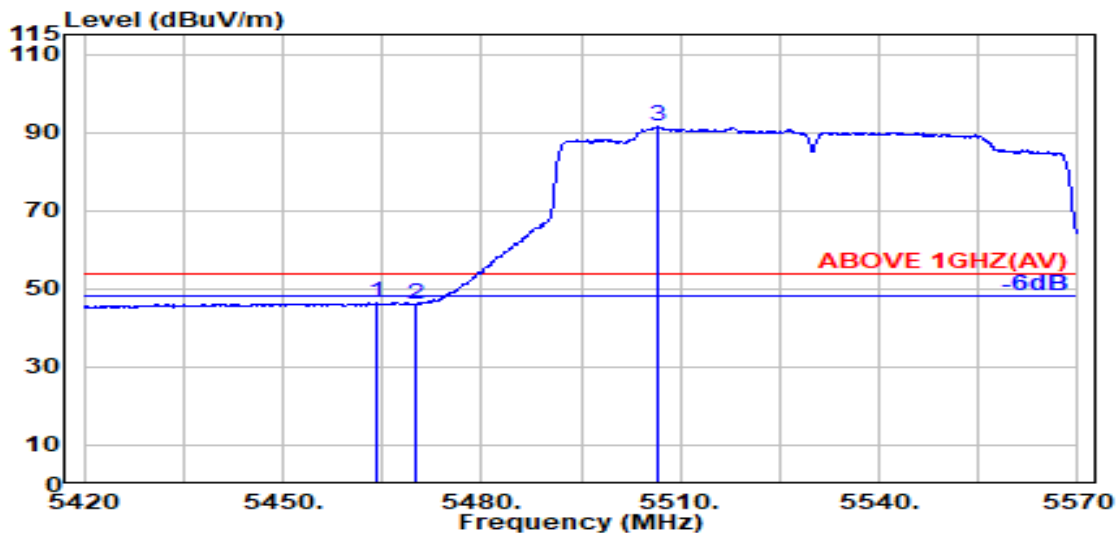


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.200	34.03	8.68	39.25	43.02	46.48	54.00	7.52	Average
5470.000	34.04	8.69	39.25	42.68	46.15	54.00	7.85	Average
@ 5506.600	34.09	8.72	39.25	87.91	91.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

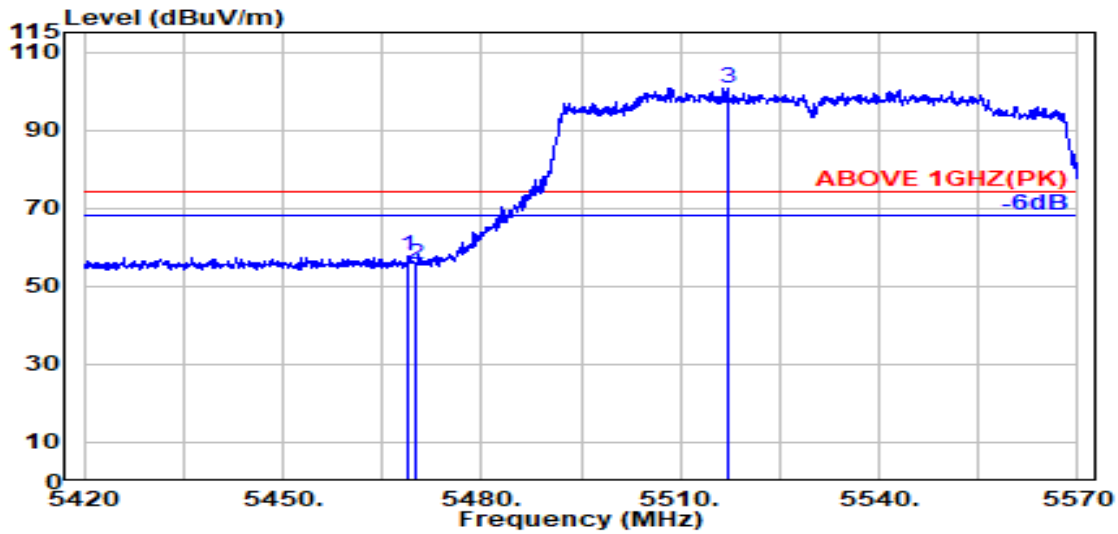

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.25	54.18	57.66	74.00	16.34	Peak
5470.000	34.04	8.69	39.25	52.05	55.52	74.00	18.48	Peak
@ 5517.200	34.07	8.73	39.25	97.32	100.86	---	---	Peak

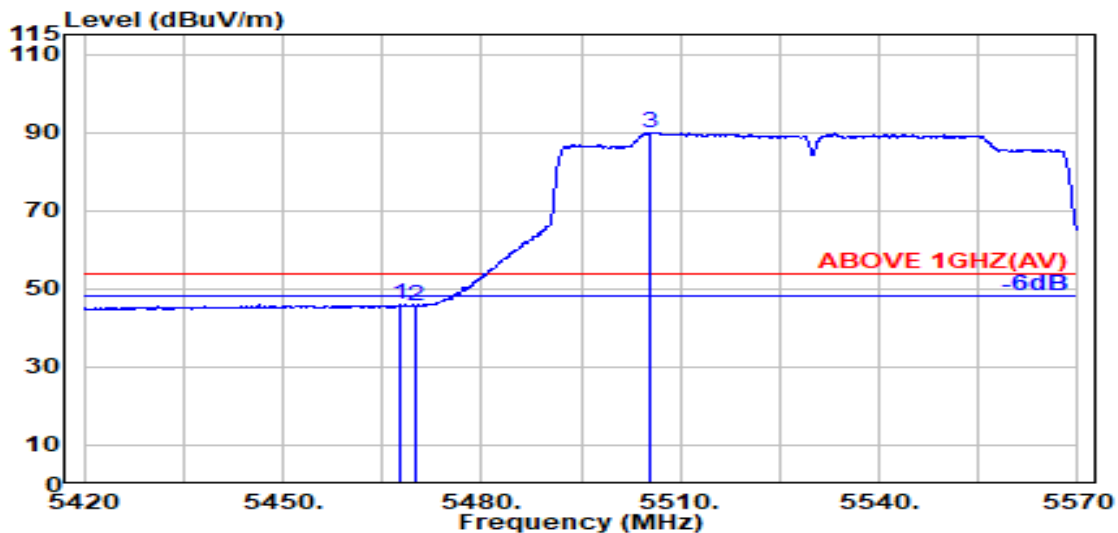


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.25	42.48	45.95	54.00	8.05	Average
5470.000	34.04	8.69	39.25	42.07	45.55	54.00	8.45	Average
@ 5505.600	34.09	8.72	39.25	86.35	89.91	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

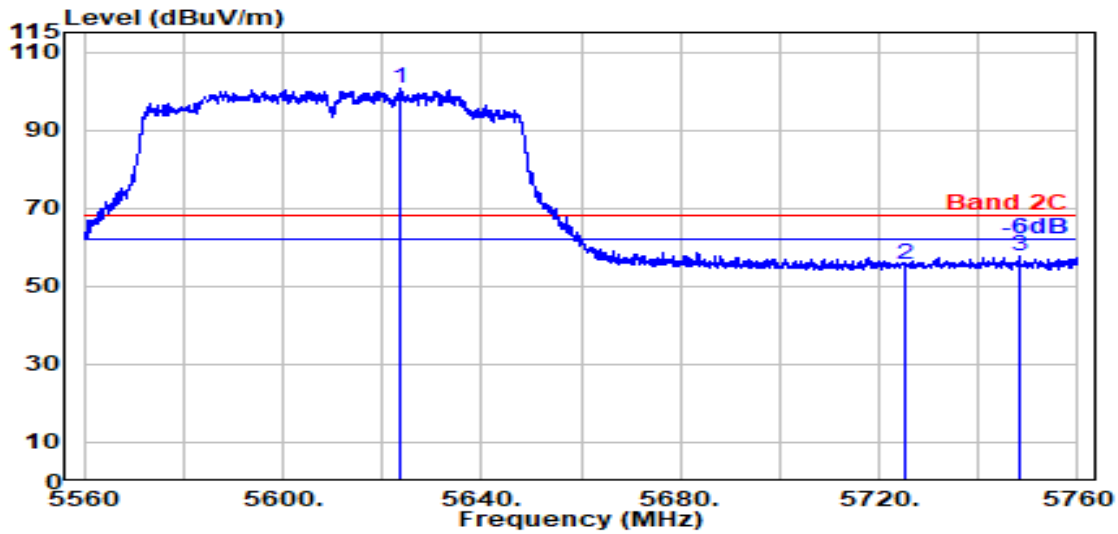

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5623.400	33.80	8.83	39.27	97.41	100.77	---	---	Peak
5725.000	33.60	8.93	39.29	52.53	55.76	68.20	12.44	Peak
5748.300	33.60	8.95	39.30	54.37	57.62	68.20	10.58	Peak

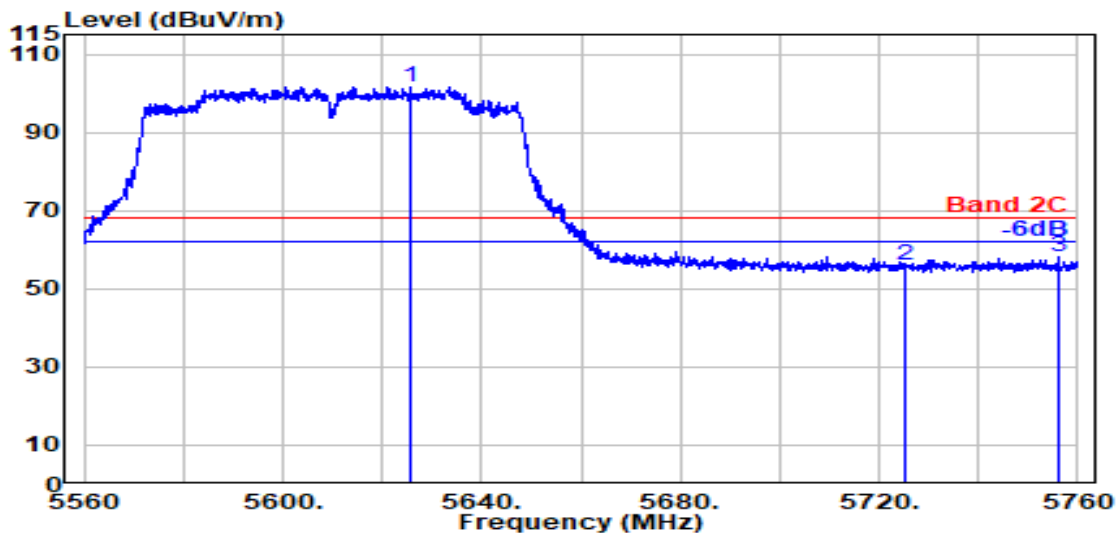


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5625.600	33.80	8.83	39.27	98.37	101.73	---	---	Peak
5725.000	33.60	8.93	39.29	52.93	56.16	68.20	12.04	Peak
5756.200	33.62	8.95	39.30	54.94	58.22	68.20	9.98	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

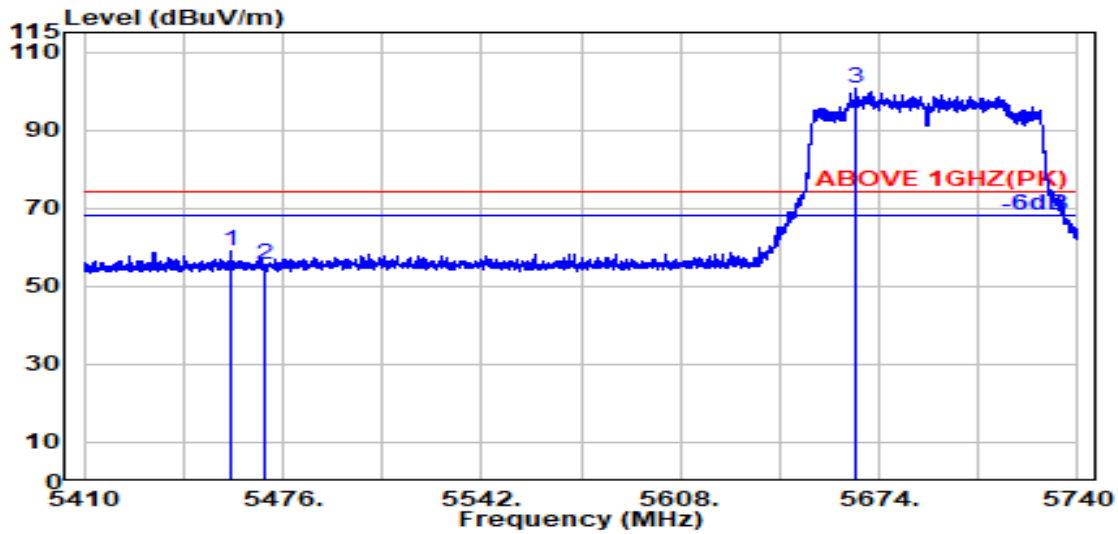

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.02	8.68	39.25	55.72	59.16	74.00	14.84	Peak
5470.000	34.04	8.69	39.25	52.12	55.60	74.00	18.40	Peak
@ 5666.400	33.73	8.87	39.28	97.37	100.69	---	---	Peak

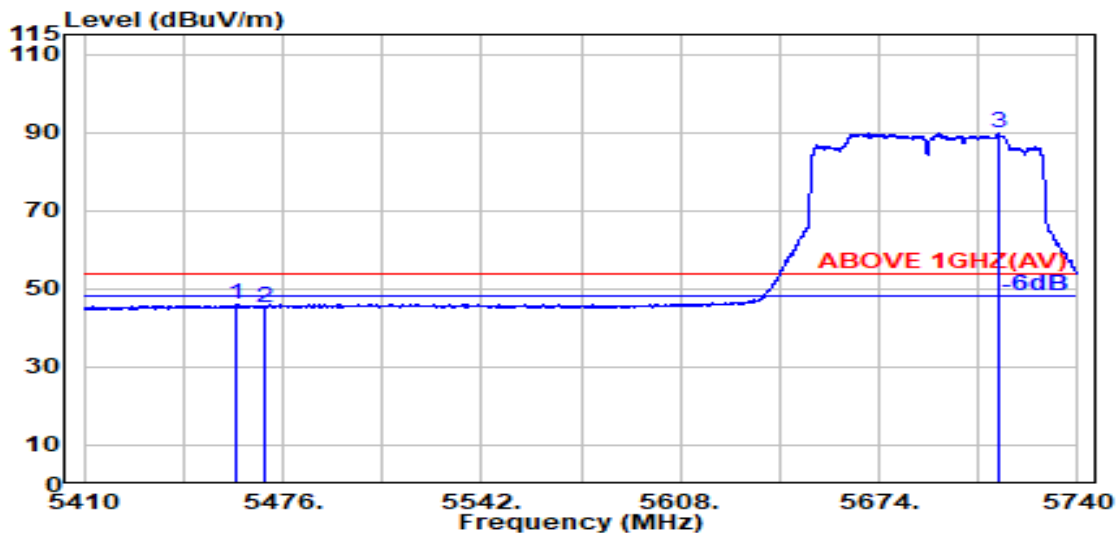


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.800	34.02	8.68	39.25	42.39	45.84	54.00	8.16	Average
5470.000	34.04	8.69	39.25	41.77	45.25	54.00	8.75	Average
@ 5713.500	33.60	8.92	39.29	86.58	89.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

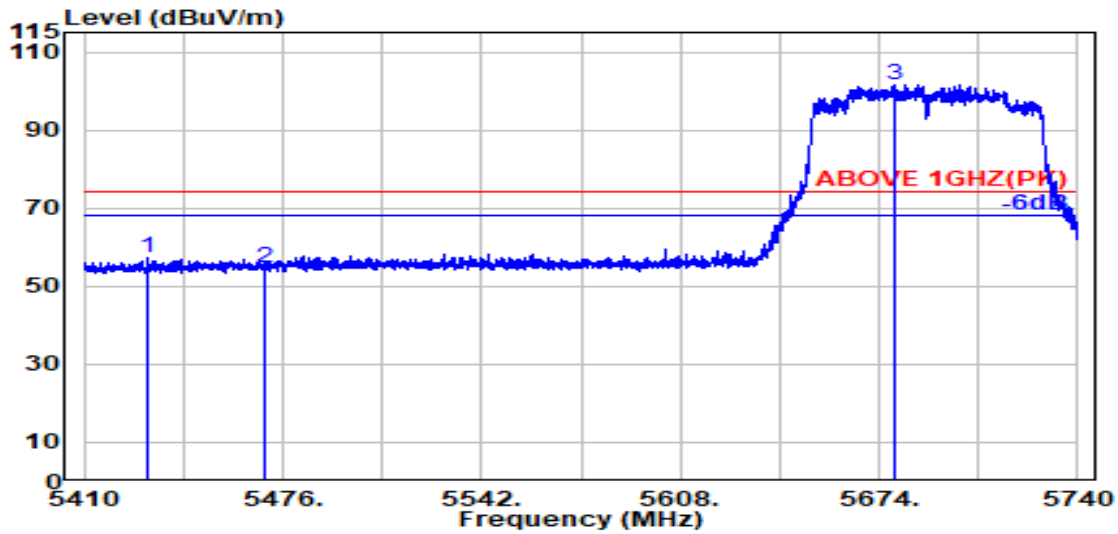

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.200	33.96	8.65	39.25	53.71	57.07	74.00	16.93	Peak
5470.000	34.04	8.69	39.25	51.37	54.85	74.00	19.15	Peak
@ 5679.300	33.68	8.88	39.28	98.37	101.65	---	---	Peak

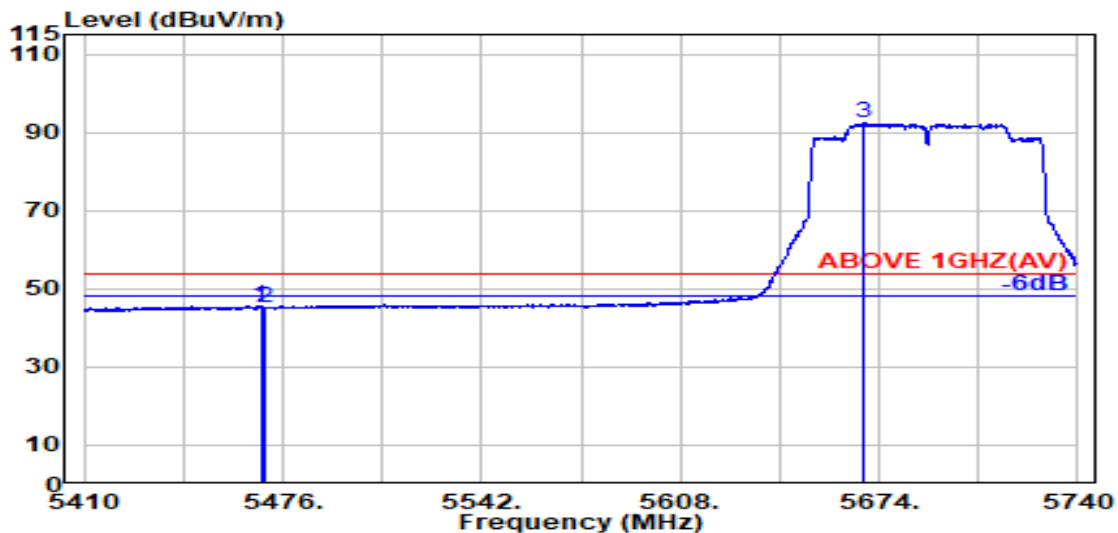


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.25	42.01	45.49	54.00	8.51	Average
5470.000	34.04	8.69	39.25	41.60	45.07	54.00	8.93	Average
@ 5669.200	33.72	8.87	39.28	88.97	92.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

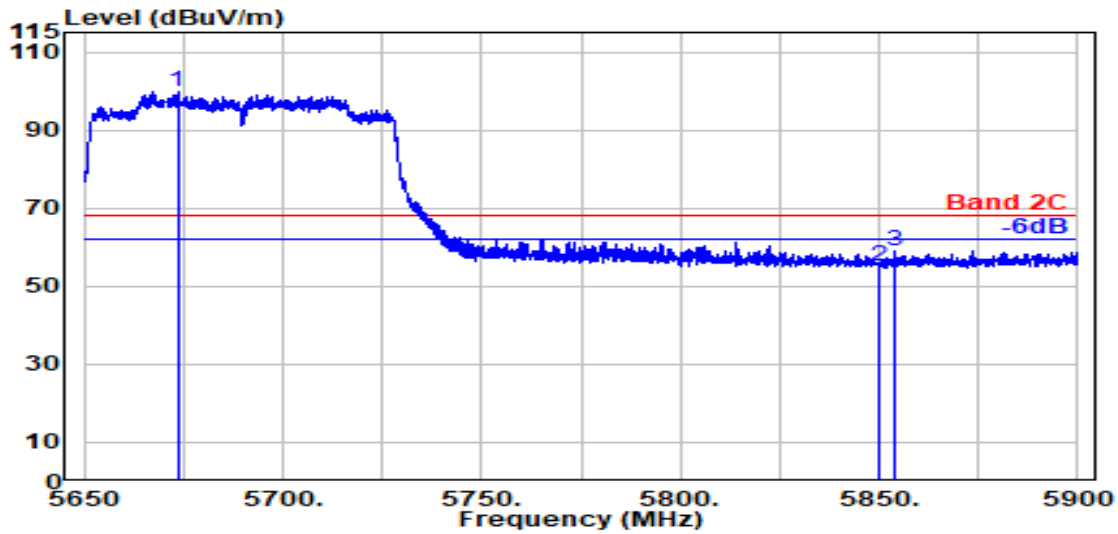

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.500	33.71	8.88	39.28	96.32	99.62	---	---	Peak
5850.000	33.90	9.04	39.31	51.47	55.09	68.20	13.11	Peak
5853.929	33.92	9.04	39.31	55.50	59.14	68.20	9.06	Peak

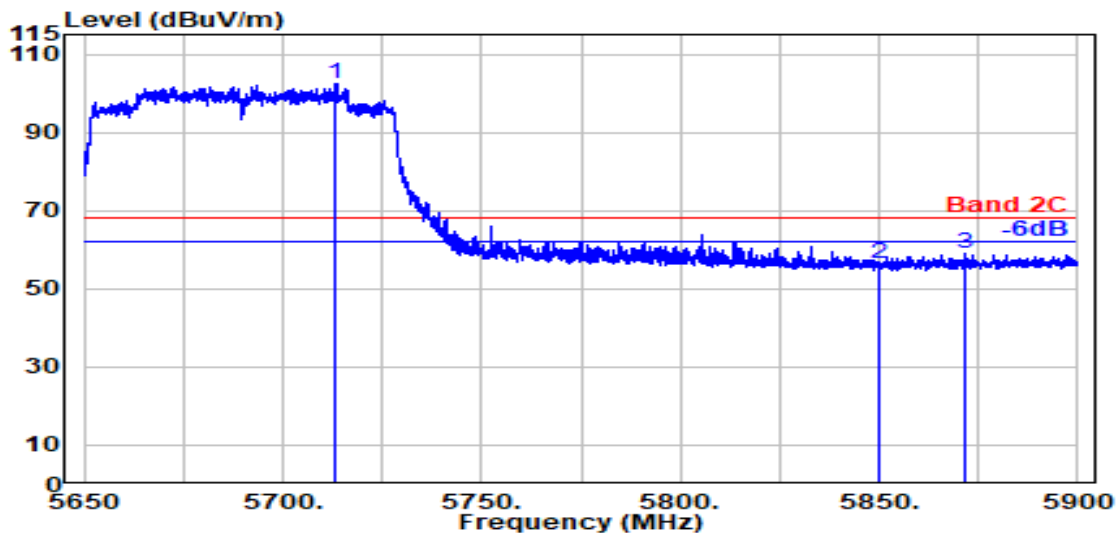


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.429	33.60	8.91	39.29	99.18	102.41	---	---	Peak
5850.000	33.90	9.04	39.31	52.89	56.51	68.20	11.69	Peak
5871.500	33.99	9.06	39.32	55.09	58.81	68.20	9.39	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

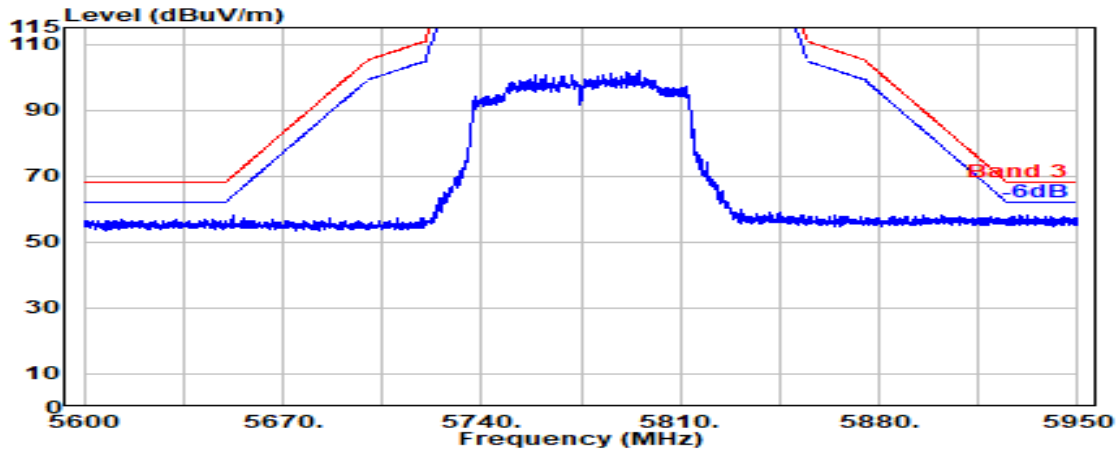

Antenna at Vertical Polarization

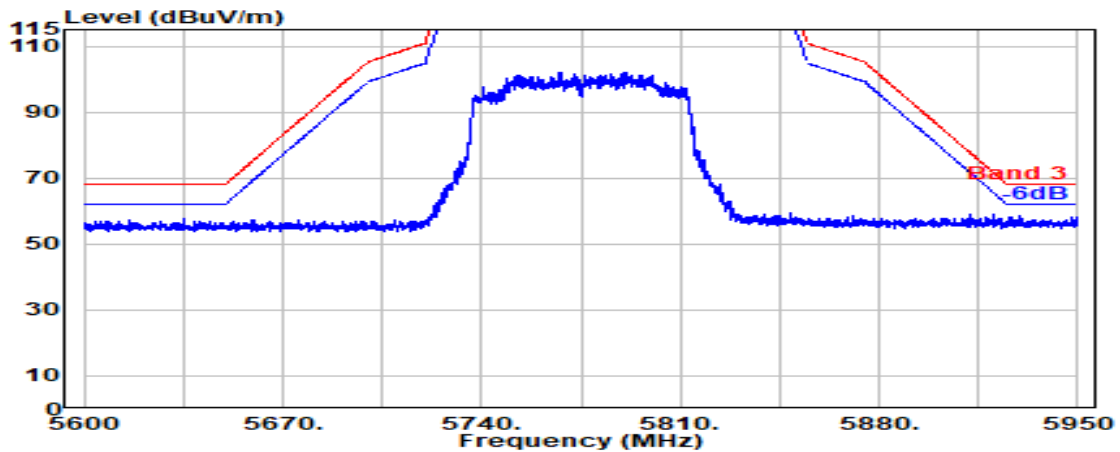


Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

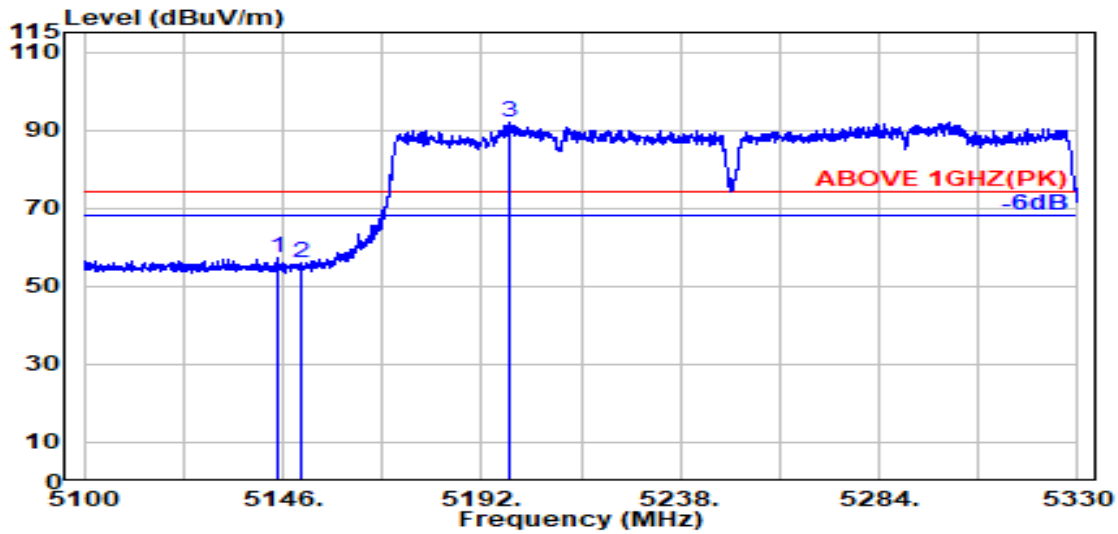

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.600	33.49	8.37	39.27	54.59	57.17	74.00	16.83	Peak
5150.000	33.50	8.37	39.27	53.24	55.84	74.00	18.16	Peak
@ 5198.700	33.79	8.42	39.27	89.06	92.01	---	---	Peak

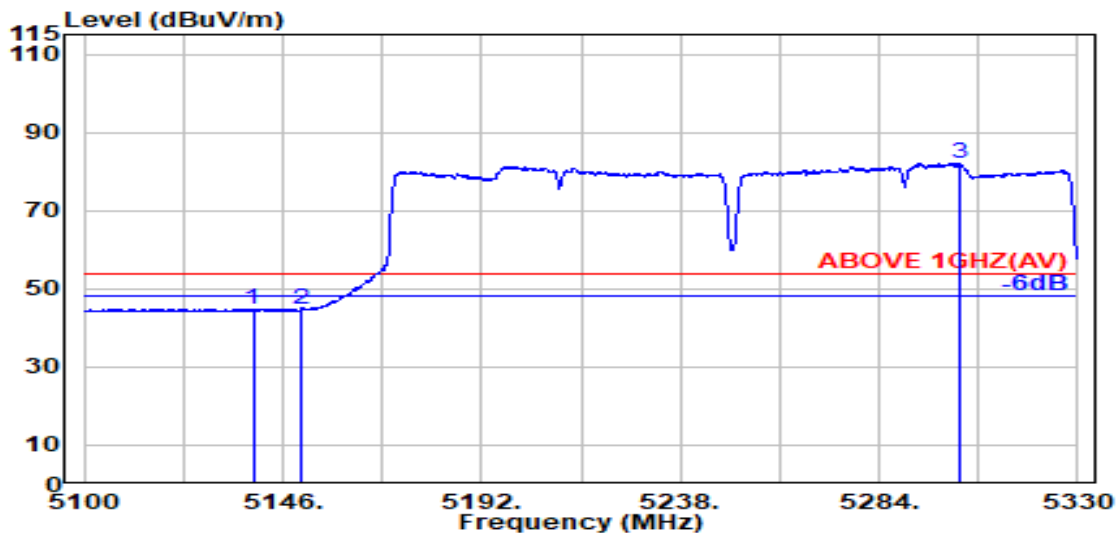


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.100	33.48	8.36	39.27	42.22	44.79	54.00	9.21	Average
5150.000	33.50	8.37	39.27	41.96	44.56	54.00	9.44	Average
@ 5302.400	33.80	8.53	39.26	79.13	82.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

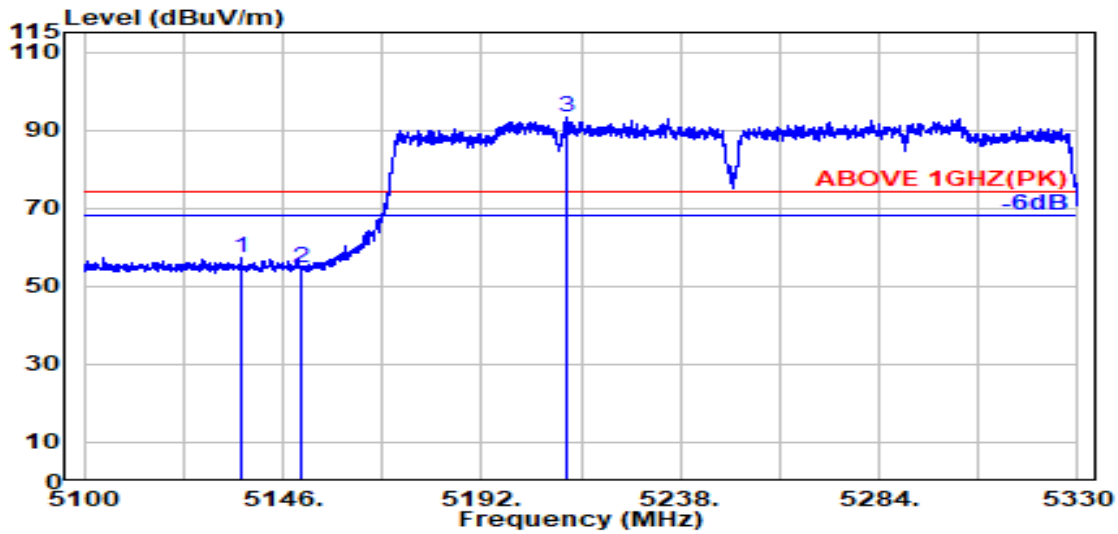

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.400	33.47	8.36	39.27	54.76	57.33	74.00	16.67	Peak
5150.000	33.50	8.37	39.27	51.89	54.50	74.00	19.50	Peak
@ 5211.800	33.78	8.44	39.27	90.48	93.42	---	---	Peak

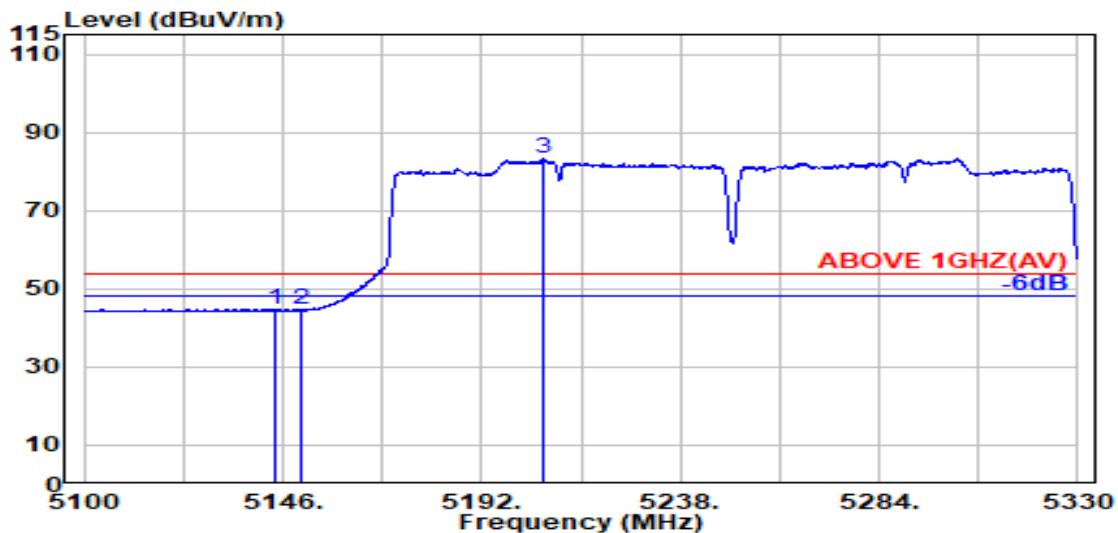


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.500	33.49	8.37	39.27	42.19	44.77	54.00	9.23	Average
5150.000	33.50	8.37	39.27	41.91	44.51	54.00	9.49	Average
@ 5206.300	33.79	8.43	39.27	80.44	83.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

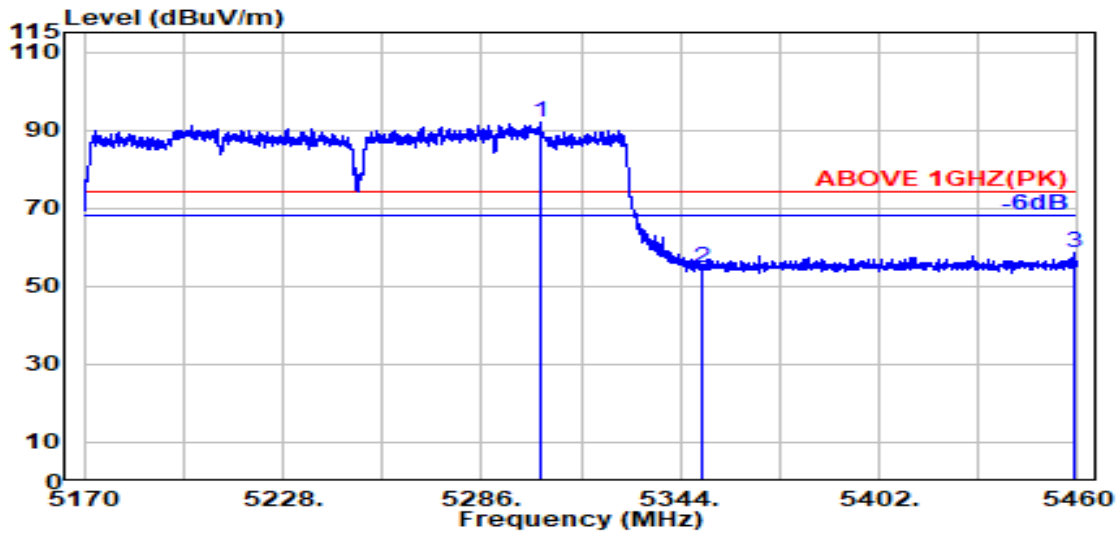

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.200	33.79	8.53	39.26	88.88	91.94	---	---	Peak
5350.000	33.70	8.57	39.26	51.55	54.57	74.00	19.43	Peak
5458.900	34.02	8.68	39.25	55.16	58.60	74.00	15.40	Peak

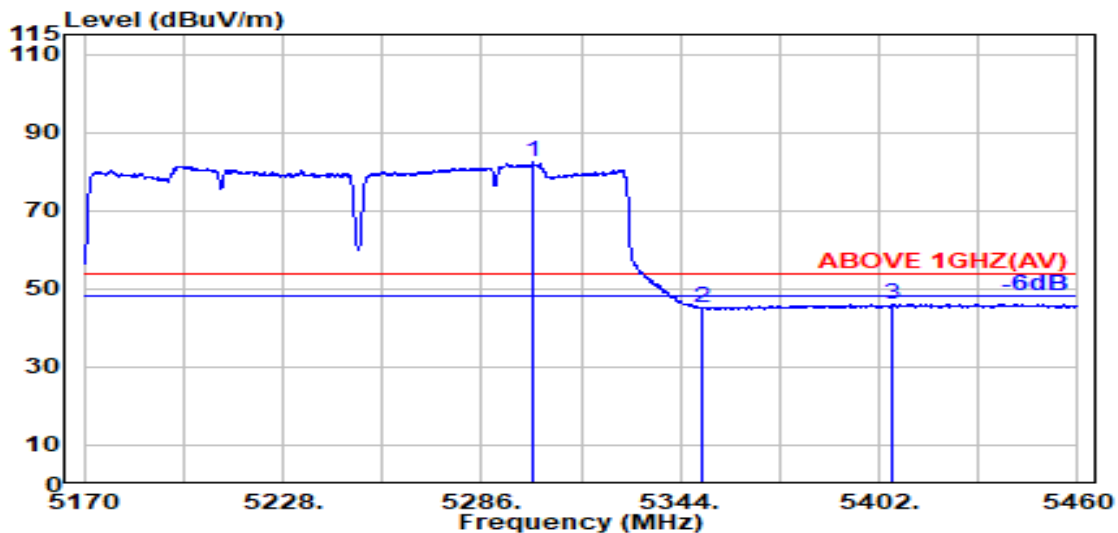


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.100	33.80	8.52	39.26	79.23	82.29	---	---	Average
5350.000	33.70	8.57	39.26	42.20	45.22	54.00	8.78	Average
5405.900	33.91	8.63	39.26	42.87	46.15	54.00	7.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

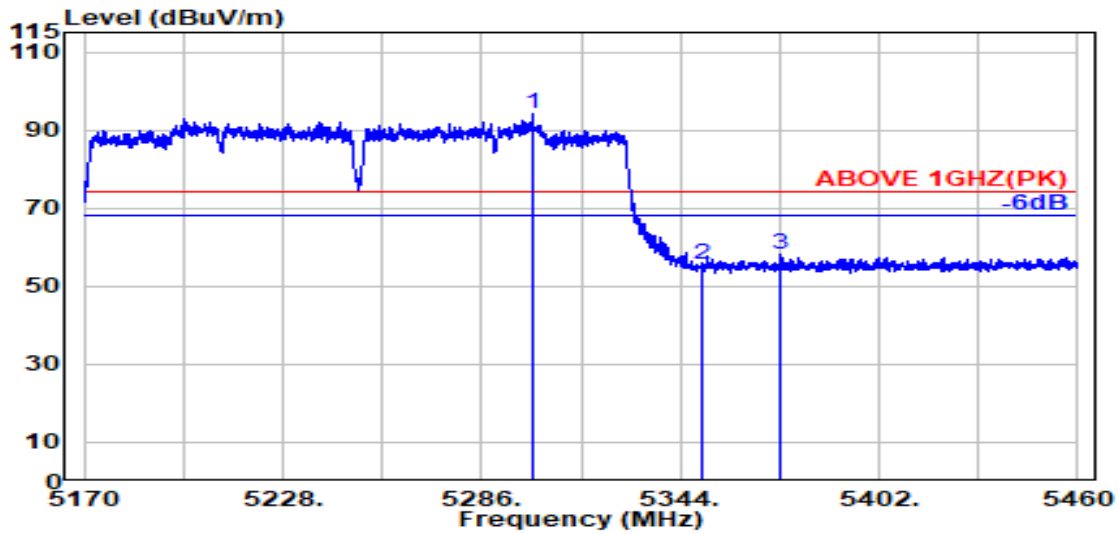

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.000	33.80	8.52	39.26	91.02	94.09	---	---	Peak
5350.000	33.70	8.57	39.26	52.51	55.52	74.00	18.48	Peak
5373.100	33.79	8.59	39.26	55.23	58.36	74.00	15.64	Peak

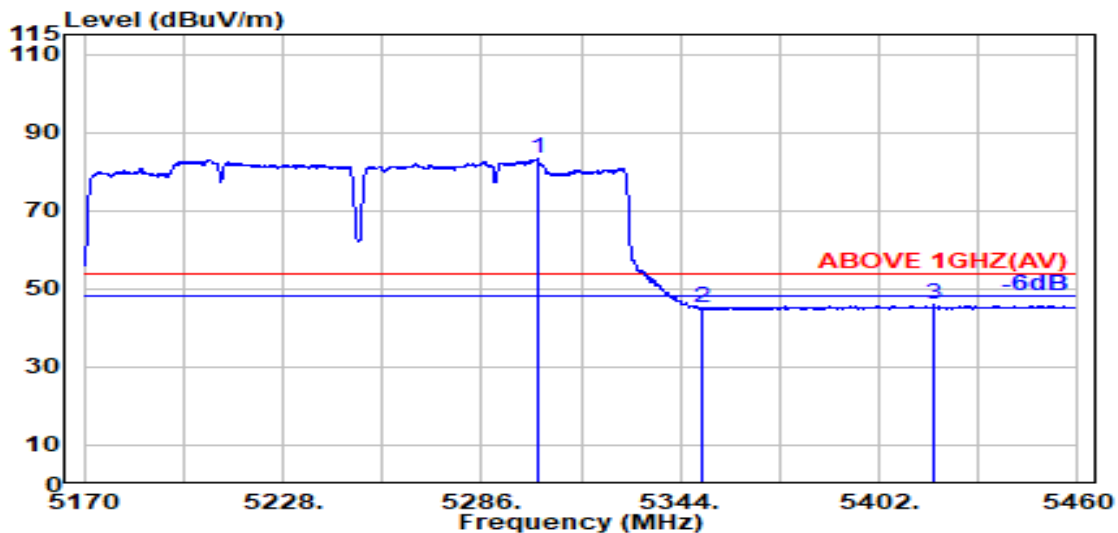


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.300	33.80	8.53	39.26	80.13	83.19	---	---	Average
5350.000	33.70	8.57	39.26	41.90	44.92	54.00	9.08	Average
5418.200	33.94	8.64	39.25	42.52	45.84	54.00	8.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

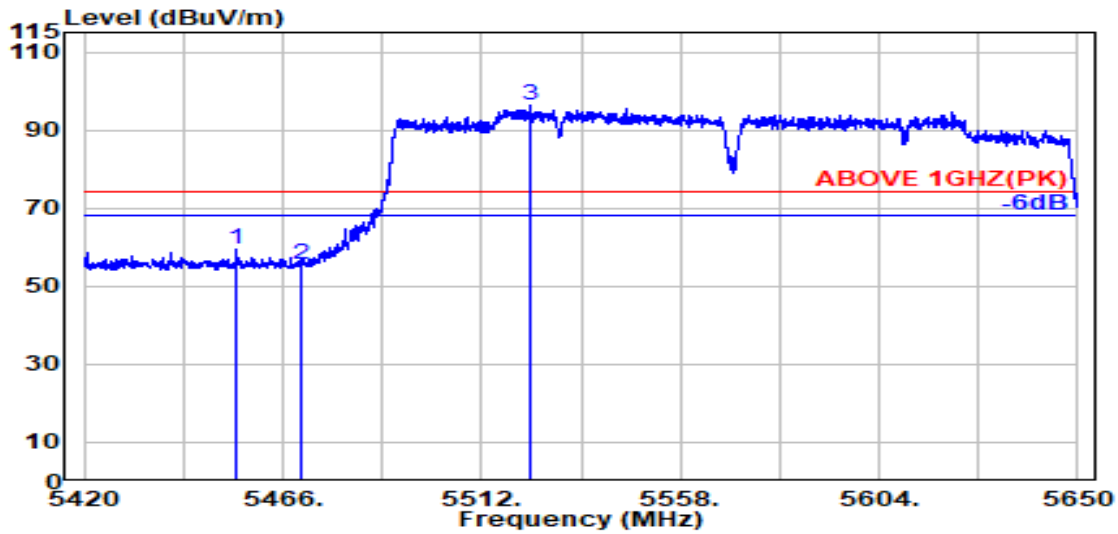

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.300	34.01	8.67	39.25	56.00	59.43	74.00	14.57	Peak
5470.000	34.04	8.69	39.25	52.26	55.74	74.00	18.26	Peak
@ 5523.400	34.05	8.74	39.25	92.65	96.19	---	---	Peak

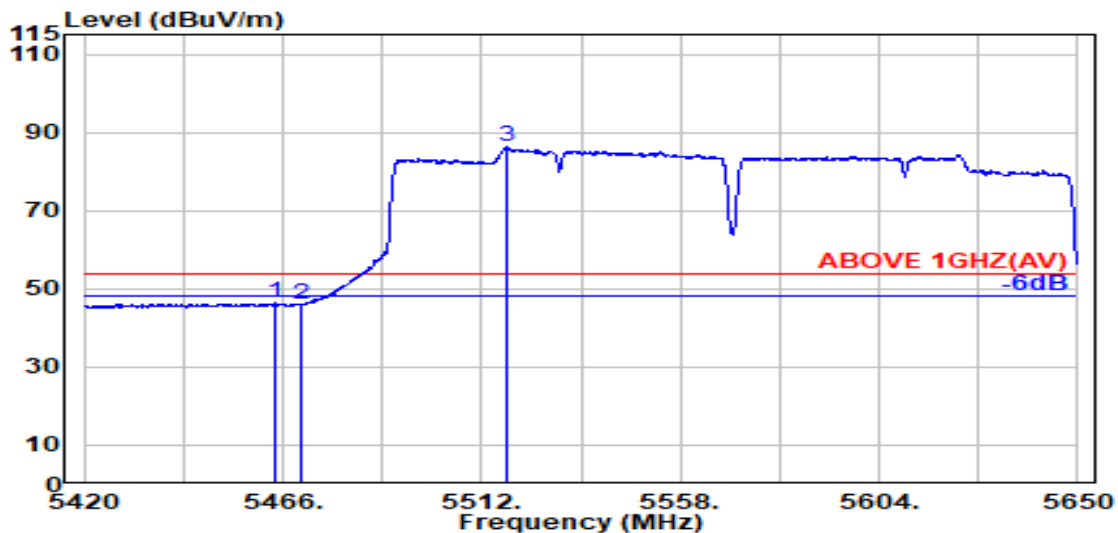


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.03	8.68	39.25	42.86	46.32	54.00	7.68	Average
5470.000	34.04	8.69	39.25	42.63	46.11	54.00	7.89	Average
@ 5517.800	34.06	8.73	39.25	82.80	86.35	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

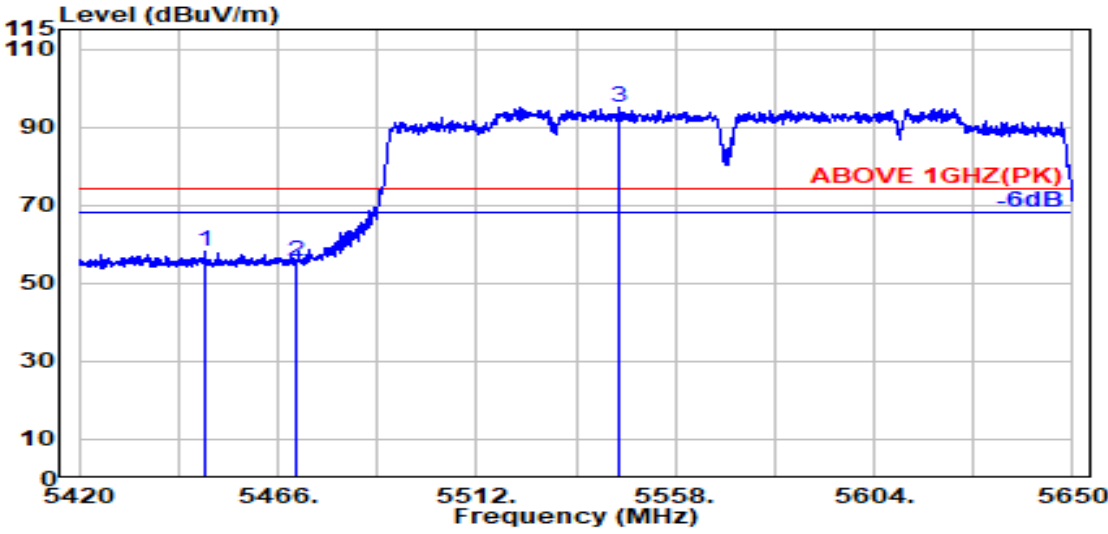

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.000	34.00	8.67	39.25	54.85	58.27	74.00	15.73	Peak
5470.000	34.04	8.69	39.25	52.10	55.58	74.00	18.42	Peak
@ 5545.200	34.01	8.76	39.26	91.37	94.88	---	---	Peak

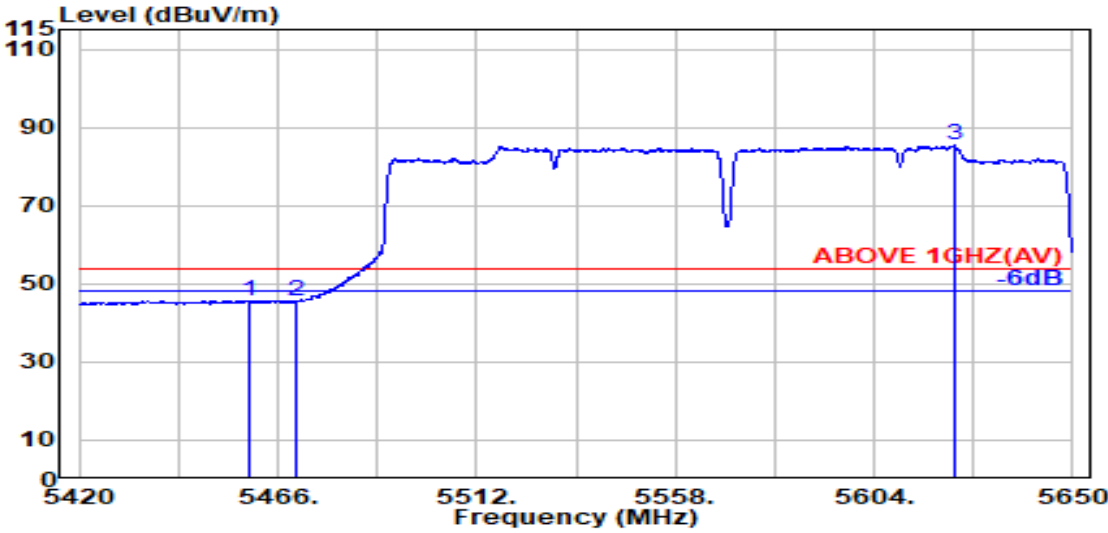


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.02	8.68	39.25	42.25	45.69	54.00	8.31	Average
5470.000	34.04	8.69	39.25	42.09	45.57	54.00	8.43	Average
@ 5622.500	33.80	8.83	39.27	82.05	85.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

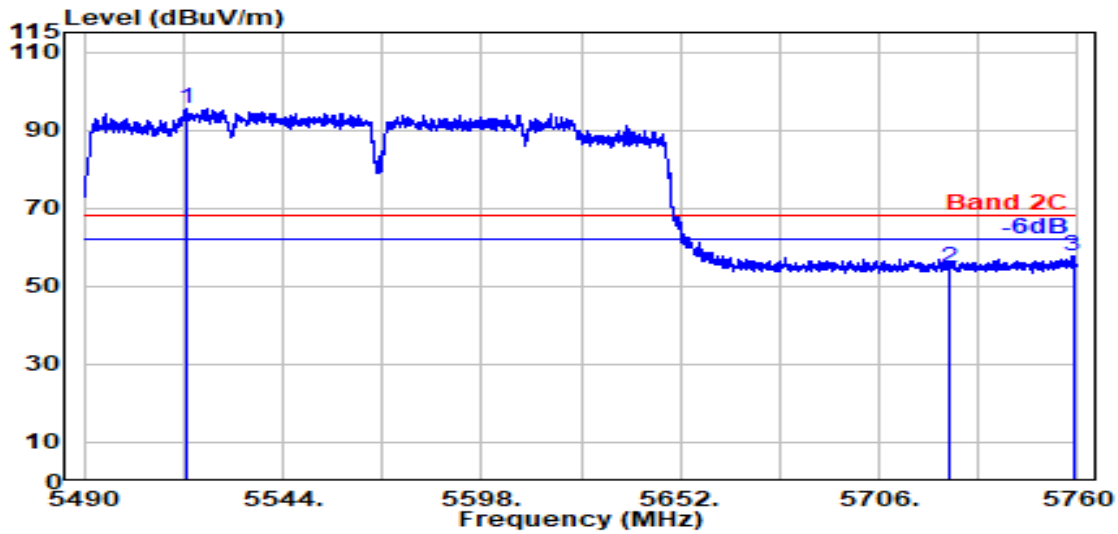

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5517.600	34.06	8.73	39.25	91.86	95.40	---	---	Peak
5725.000	33.60	8.93	39.29	51.42	54.65	68.20	13.55	Peak
5758.700	33.63	8.96	39.30	54.43	57.72	68.20	10.48	Peak

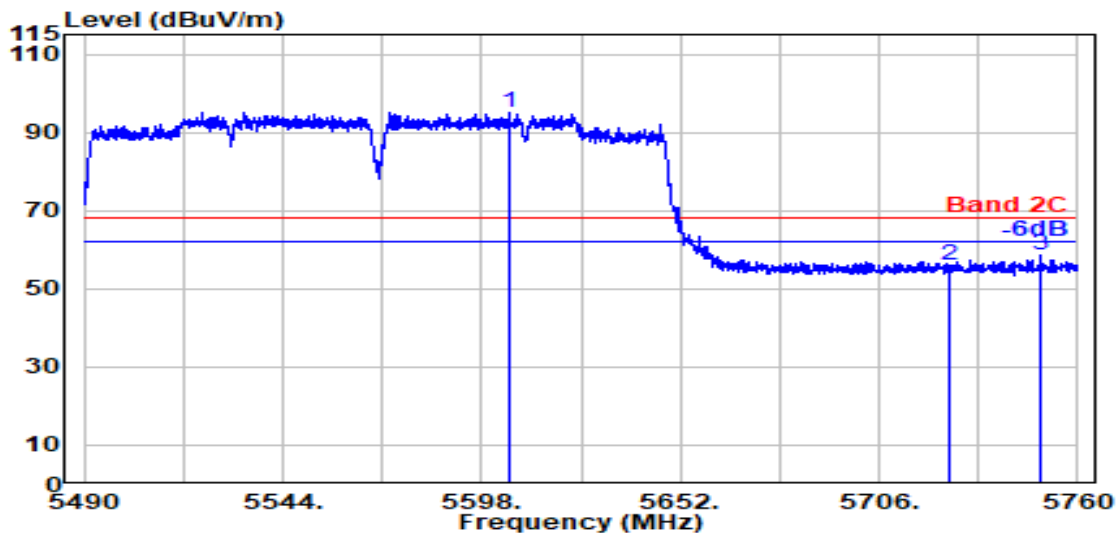


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.500	33.80	8.82	39.27	91.68	95.03	---	---	Peak
5725.000	33.60	8.93	39.29	52.87	56.10	68.20	12.10	Peak
5749.800	33.60	8.95	39.30	55.24	58.50	68.20	9.70	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

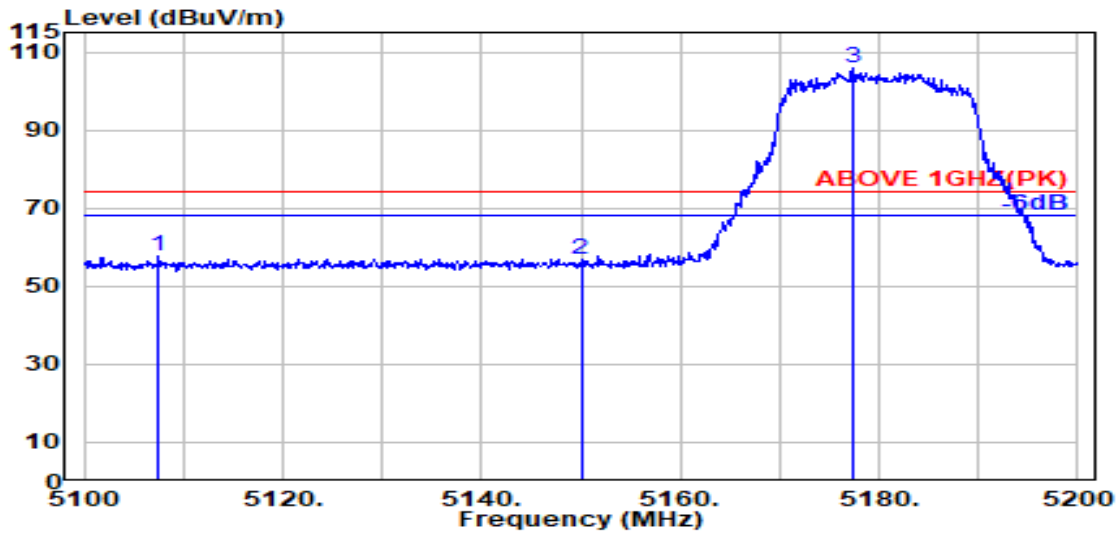

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.500	33.42	8.33	39.27	55.27	57.74	74.00	16.26	Peak
5150.000	33.50	8.37	39.27	54.40	57.01	74.00	16.99	Peak
@ 5177.300	33.66	8.40	39.27	103.11	105.91	---	---	Peak

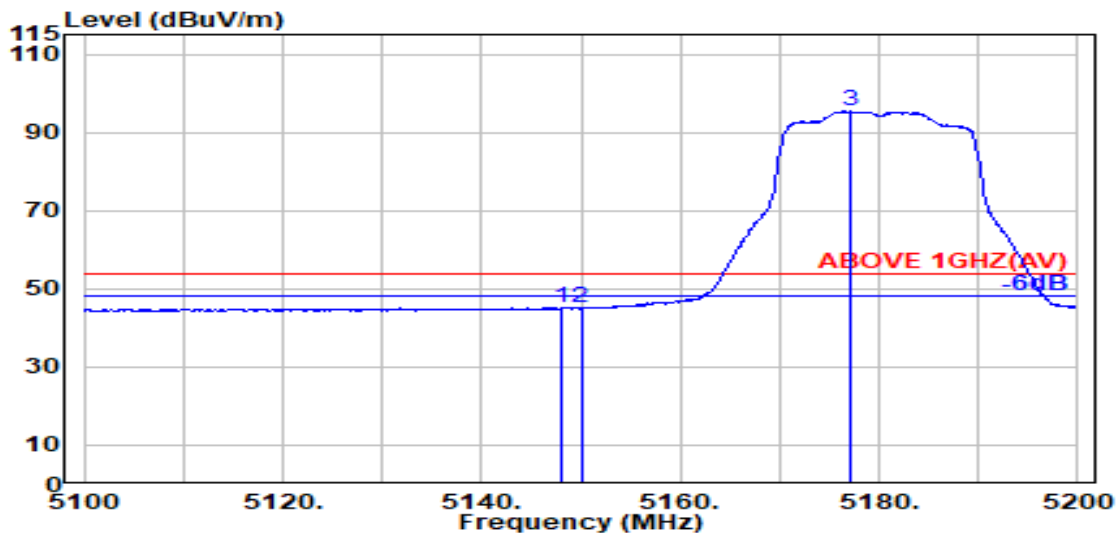


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.50	8.37	39.27	42.61	45.21	54.00	8.79	Average
5150.000	33.50	8.37	39.27	42.58	45.18	54.00	8.82	Average
@ 5177.200	33.66	8.40	39.27	92.68	95.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

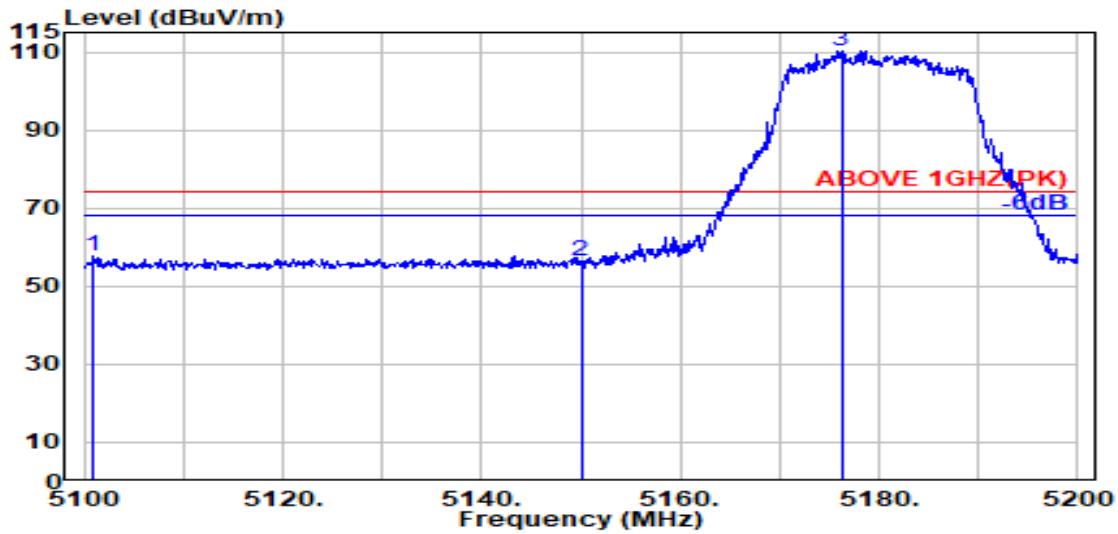

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.000	33.40	8.32	39.27	55.09	57.55	74.00	16.45	Peak
5150.000	33.50	8.37	39.27	53.86	56.47	74.00	17.53	Peak
@ 5176.200	33.66	8.40	39.27	107.43	110.22	---	---	Peak

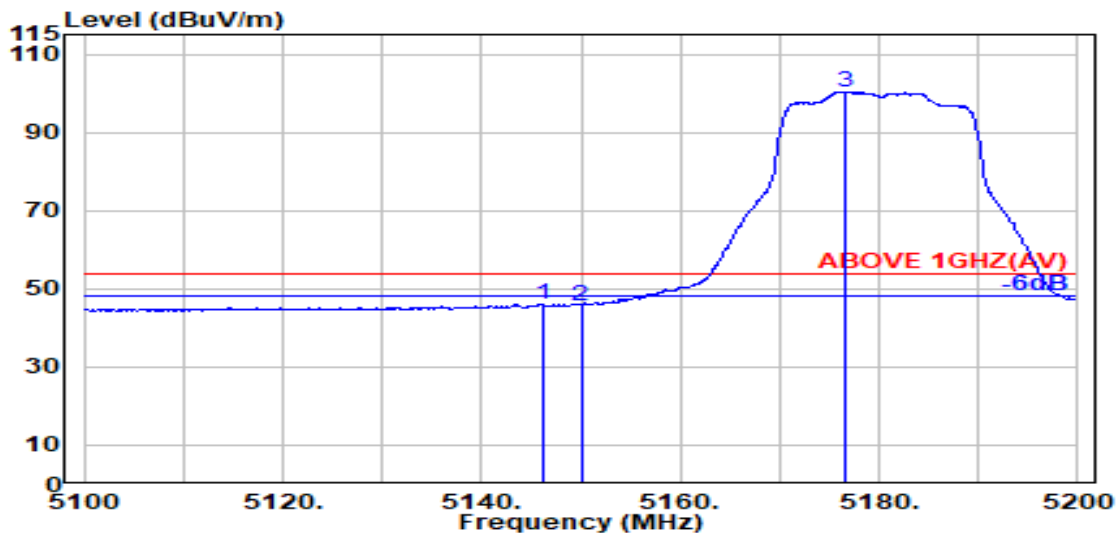


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	33.49	8.37	39.27	43.53	46.13	54.00	7.87	Average
5150.000	33.50	8.37	39.27	43.10	45.71	54.00	8.29	Average
@ 5176.500	33.66	8.40	39.27	97.66	100.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

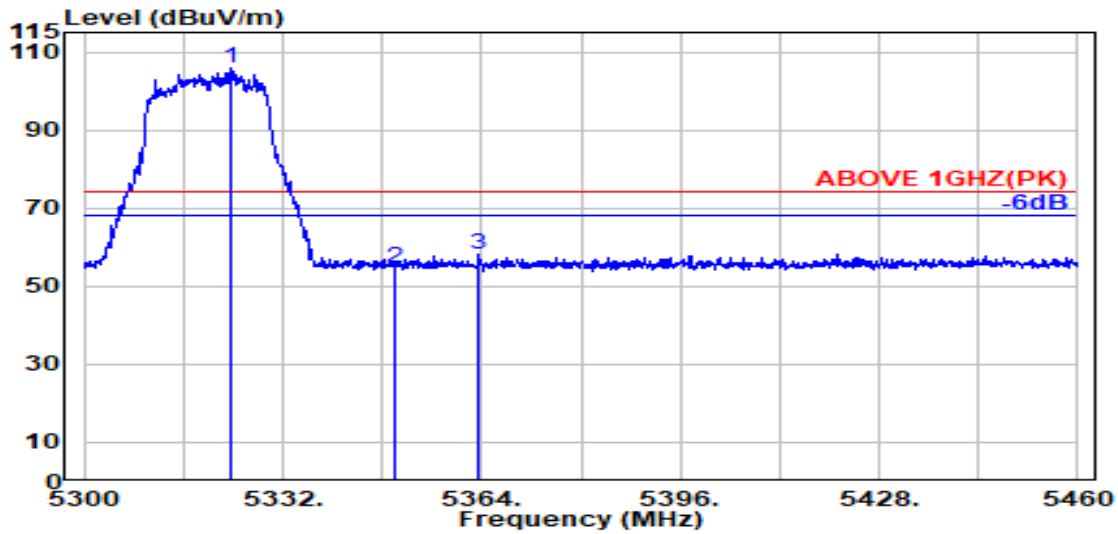

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	33.75	8.55	39.26	103.04	106.07	---	---	Peak
5350.000	33.70	8.57	39.26	51.69	54.70	74.00	19.30	Peak
5363.600	33.75	8.59	39.26	54.97	58.06	74.00	15.94	Peak

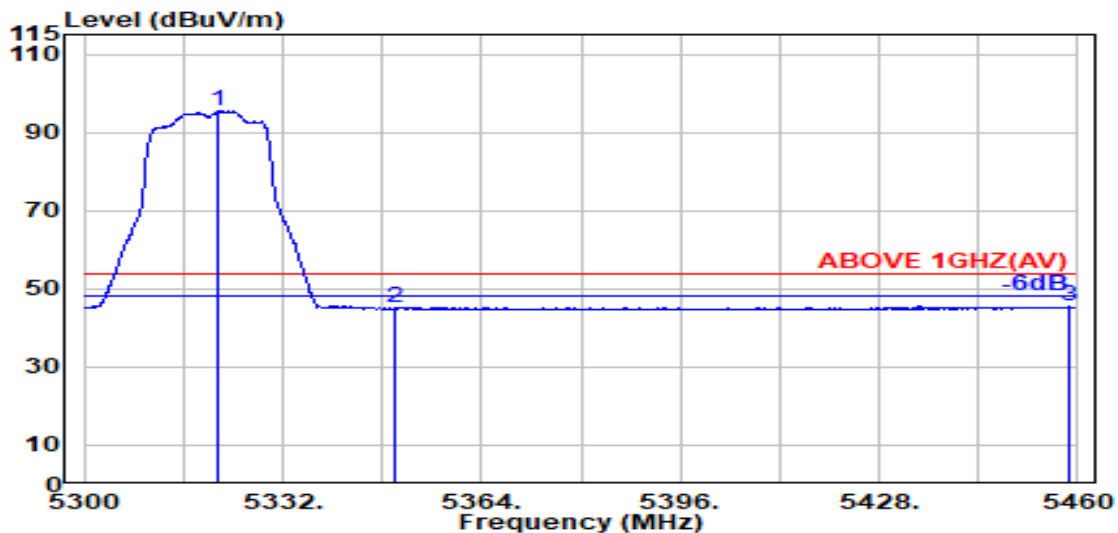


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	33.76	8.54	39.26	92.37	95.41	---	---	Average
5350.000	33.70	8.57	39.26	41.92	44.94	54.00	9.06	Average
5458.500	34.02	8.68	39.25	41.98	45.42	54.00	8.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

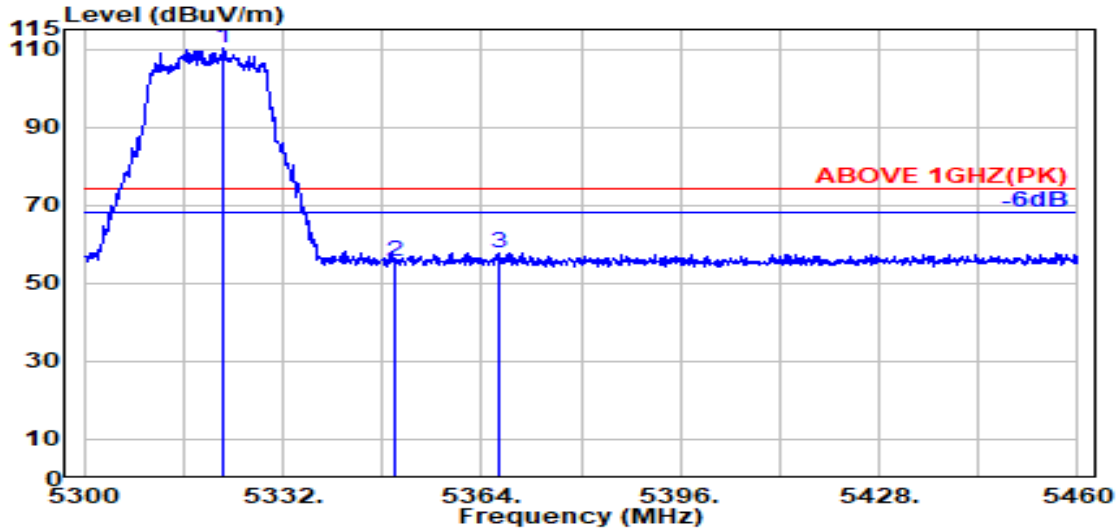

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.200	33.76	8.55	39.26	107.13	110.17	---	---	Peak
5350.000	33.70	8.57	39.26	52.52	55.54	74.00	18.46	Peak
5367.000	33.77	8.59	39.26	54.72	57.82	74.00	16.18	Peak

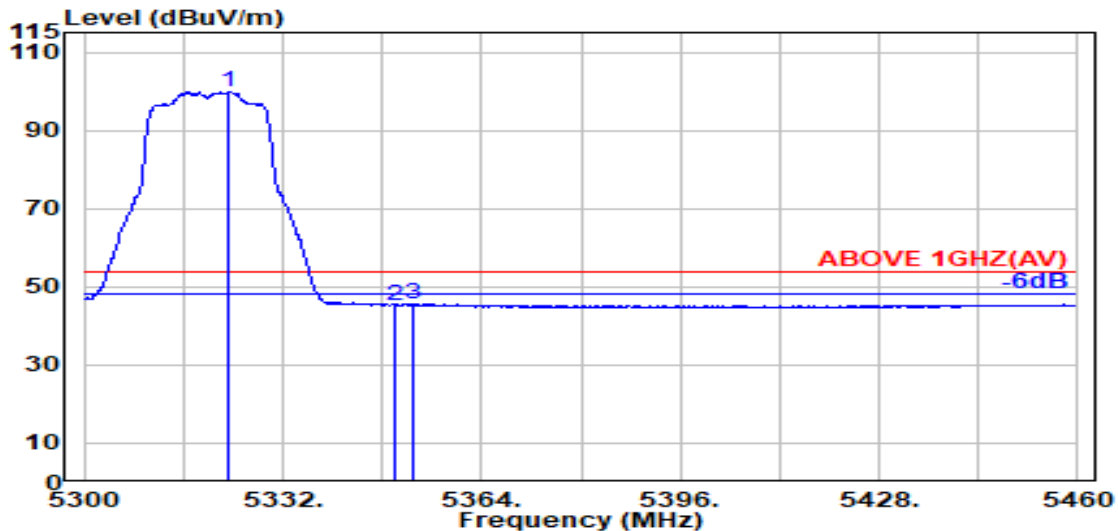


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.400	33.75	8.55	39.26	96.89	99.93	---	---	Average
5350.000	33.70	8.57	39.26	42.20	45.22	54.00	8.78	Average
5352.900	33.71	8.58	39.26	42.69	45.72	54.00	8.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

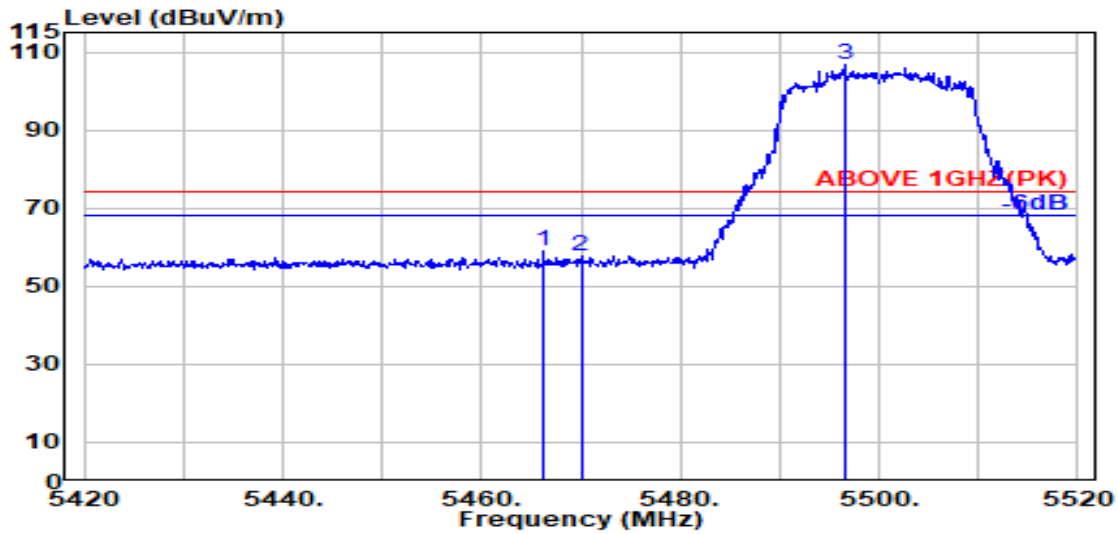

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.03	8.68	39.25	55.40	58.87	74.00	15.13	Peak
5470.000	34.04	8.69	39.25	54.43	57.91	74.00	16.09	Peak
@ 5496.500	34.09	8.71	39.25	103.15	106.71	---	---	Peak

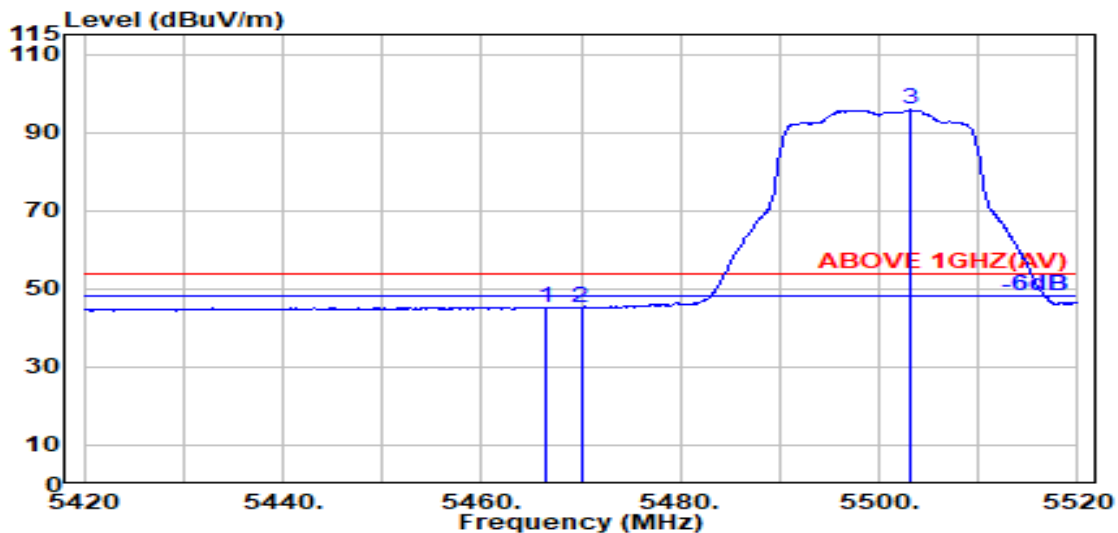


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.03	8.68	39.25	41.87	45.34	54.00	8.66	Average
5470.000	34.04	8.69	39.25	41.65	45.12	54.00	8.88	Average
@ 5503.200	34.09	8.72	39.25	92.17	95.73	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

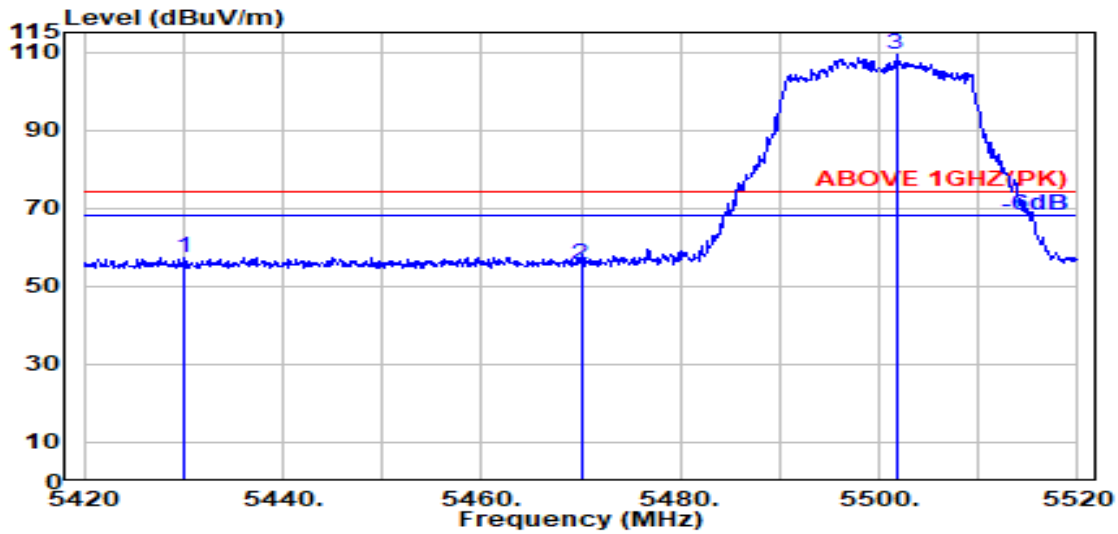

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.100	33.96	8.65	39.25	54.10	57.45	74.00	16.55	Peak
5470.000	34.04	8.69	39.25	51.94	55.41	74.00	18.59	Peak
@ 5501.700	34.10	8.72	39.25	105.93	109.49	---	---	Peak

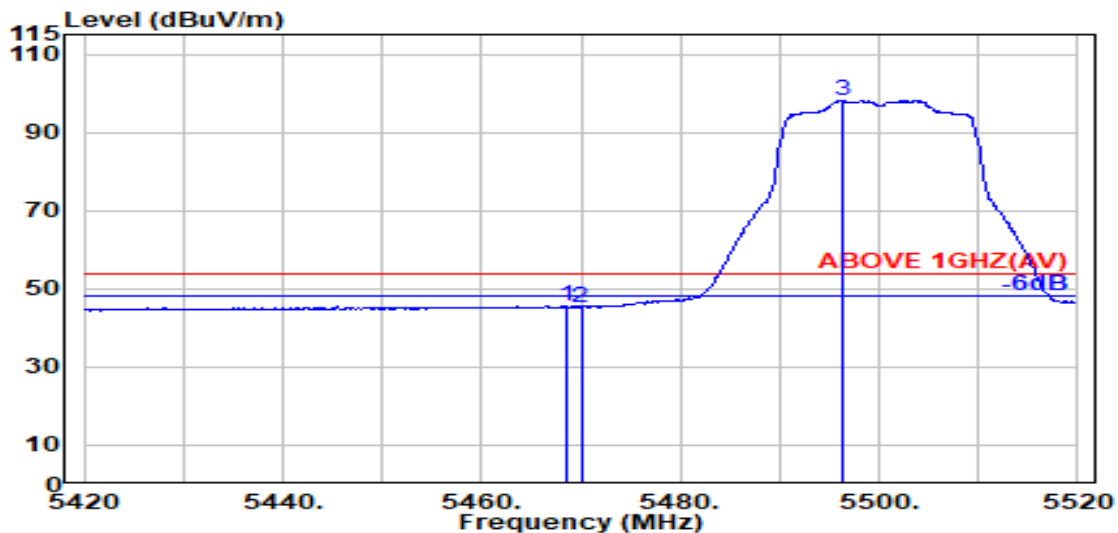


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.25	42.08	45.55	54.00	8.45	Average
5470.000	34.04	8.69	39.25	41.74	45.22	54.00	8.78	Average
@ 5496.300	34.09	8.71	39.25	94.62	98.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

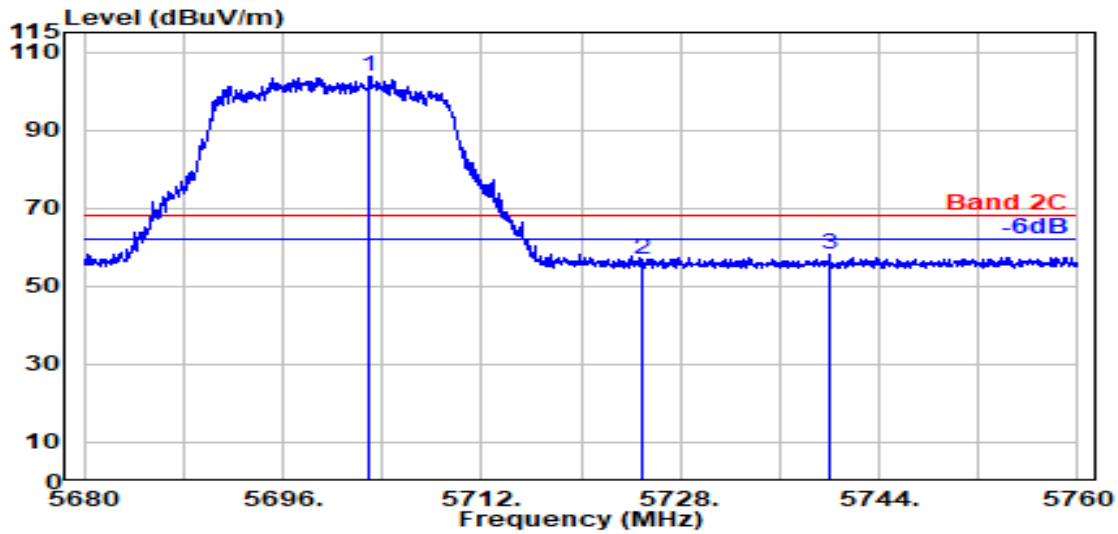

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.000	33.60	8.91	39.29	100.51	103.72	---	---	Peak
5725.000	33.60	8.93	39.29	53.66	56.89	68.20	11.31	Peak
5740.050	33.60	8.94	39.29	54.83	58.08	68.20	10.12	Peak

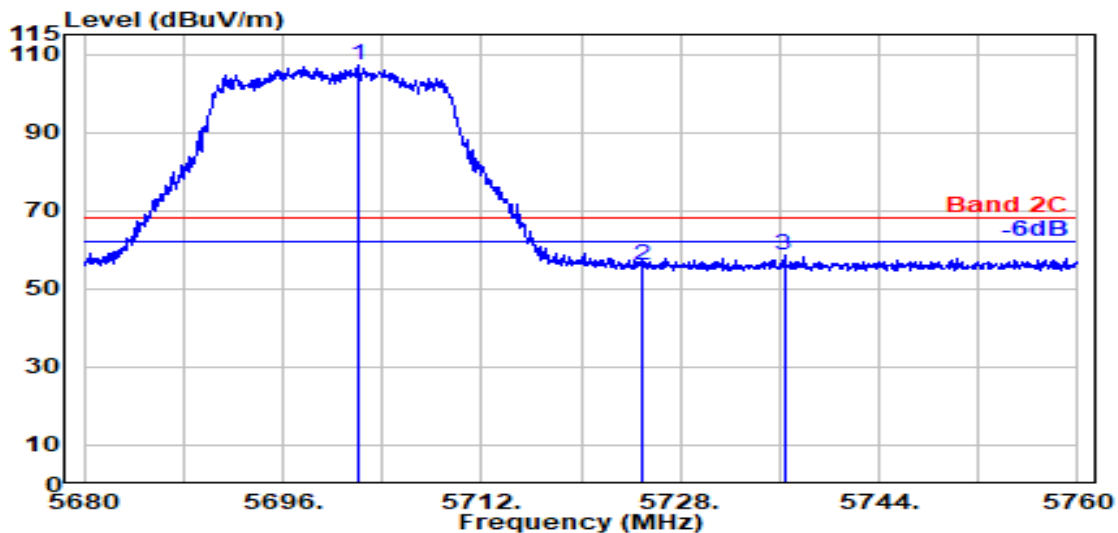


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.100	33.60	8.90	39.29	104.19	107.41	---	---	Peak
5725.000	33.60	8.93	39.29	52.96	56.20	68.20	12.00	Peak
5736.350	33.60	8.94	39.29	55.46	58.70	68.20	9.50	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

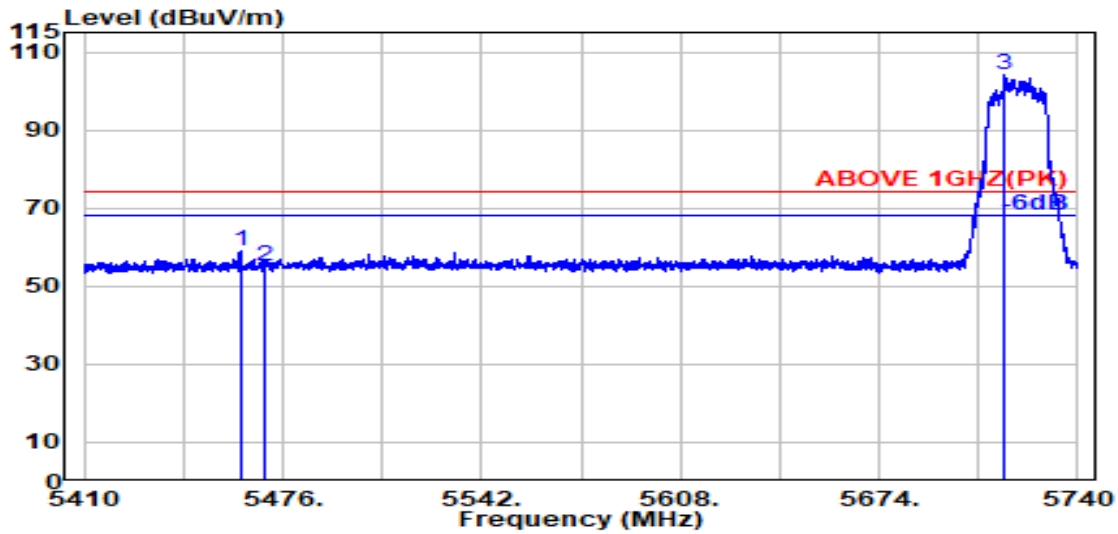

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.800	34.02	8.68	39.25	55.64	59.09	74.00	14.91	Peak
5470.000	34.04	8.69	39.25	51.45	54.93	74.00	19.07	Peak
@ 5715.900	33.60	8.92	39.29	100.93	104.15	---	---	Peak

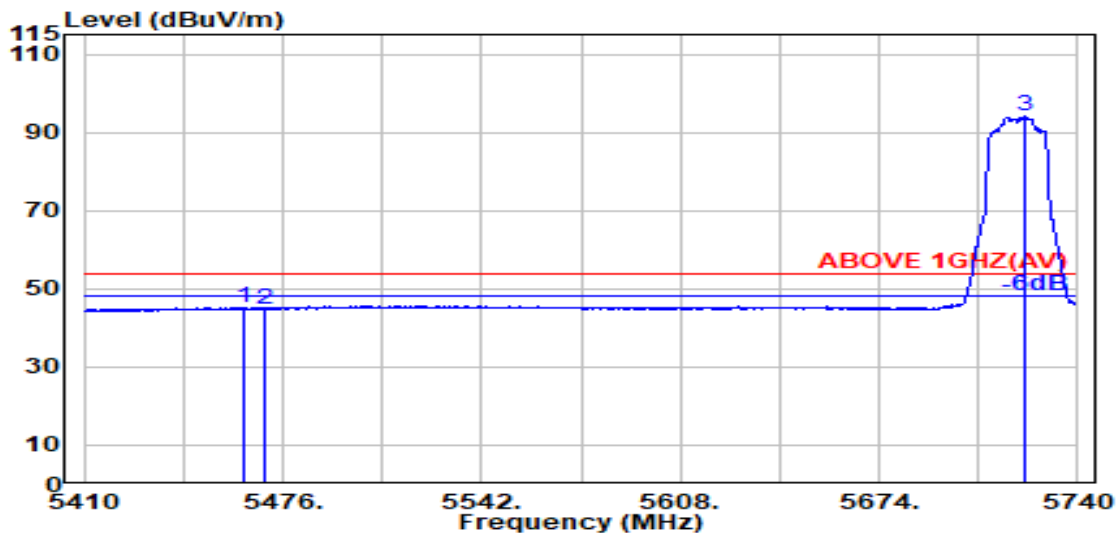


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.03	8.68	39.25	41.74	45.20	54.00	8.80	Average
5470.000	34.04	8.69	39.25	41.41	44.88	54.00	9.12	Average
@ 5722.000	33.60	8.92	39.29	90.73	93.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

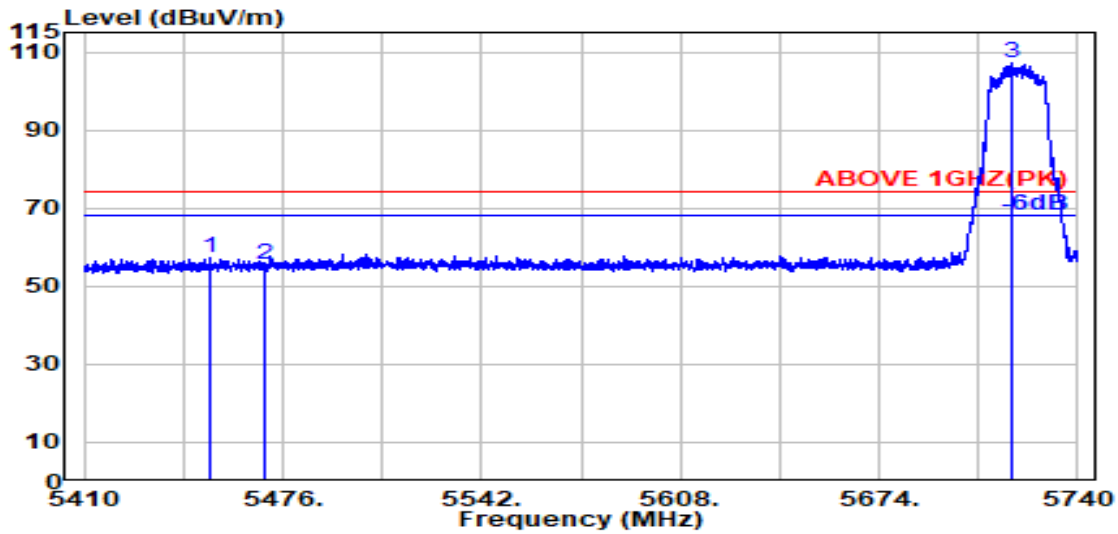

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.800	34.00	8.67	39.25	54.03	57.45	74.00	16.55	Peak
5470.000	34.04	8.69	39.25	51.90	55.38	74.00	18.62	Peak
@ 5718.400	33.60	8.92	39.29	104.07	107.30	---	---	Peak

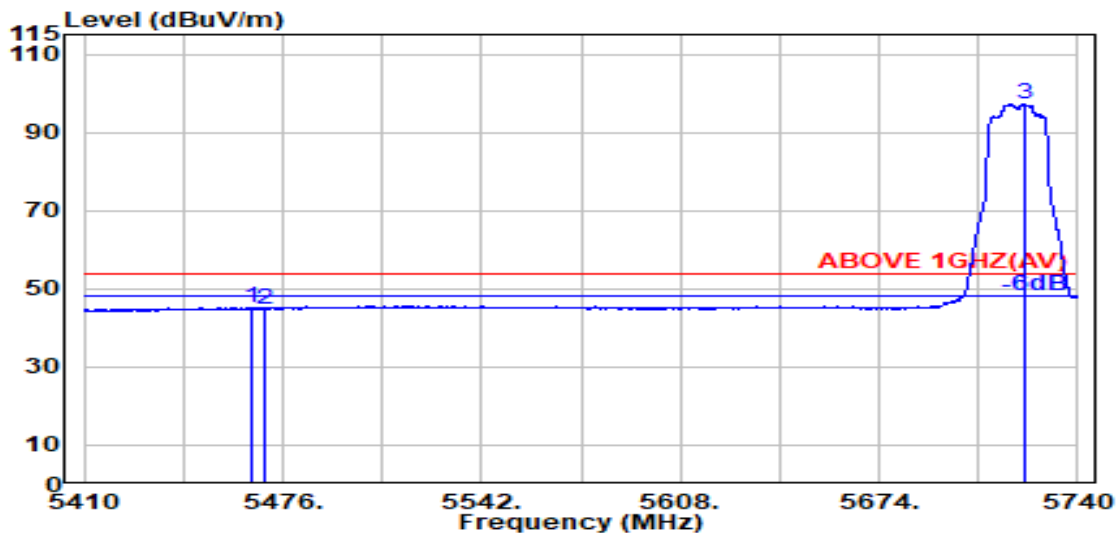

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.03	8.68	39.25	41.78	45.25	54.00	8.75	Average
5470.000	34.04	8.69	39.25	41.39	44.86	54.00	9.14	Average
@ 5722.200	33.60	8.92	39.29	94.07	97.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

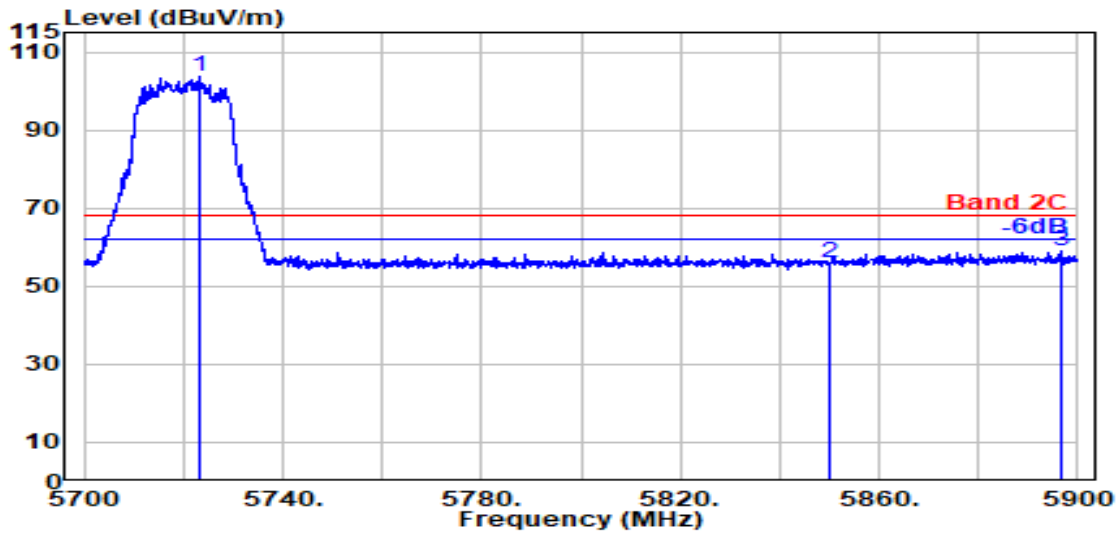

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.500	33.60	8.92	39.29	100.50	103.73	---	---	Peak
5850.000	33.90	9.04	39.31	52.54	56.16	68.20	12.04	Peak
5896.700	34.09	9.08	39.32	55.08	58.93	68.20	9.27	Peak

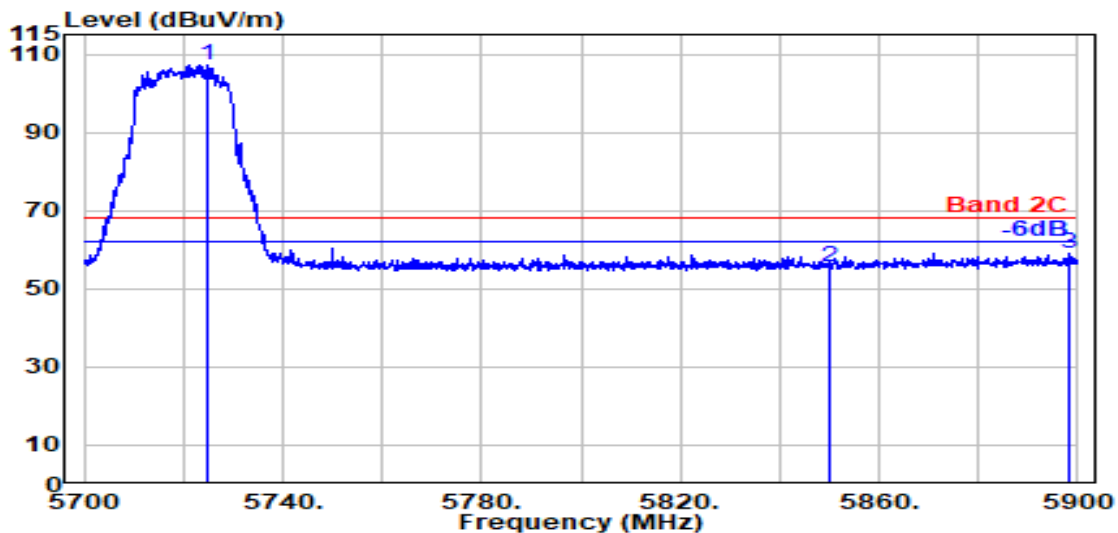


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.900	33.60	8.93	39.29	104.12	107.35	---	---	Peak
5850.000	33.90	9.04	39.31	51.88	55.50	68.20	12.70	Peak
5898.000	34.09	9.08	39.32	55.05	58.90	68.20	9.30	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

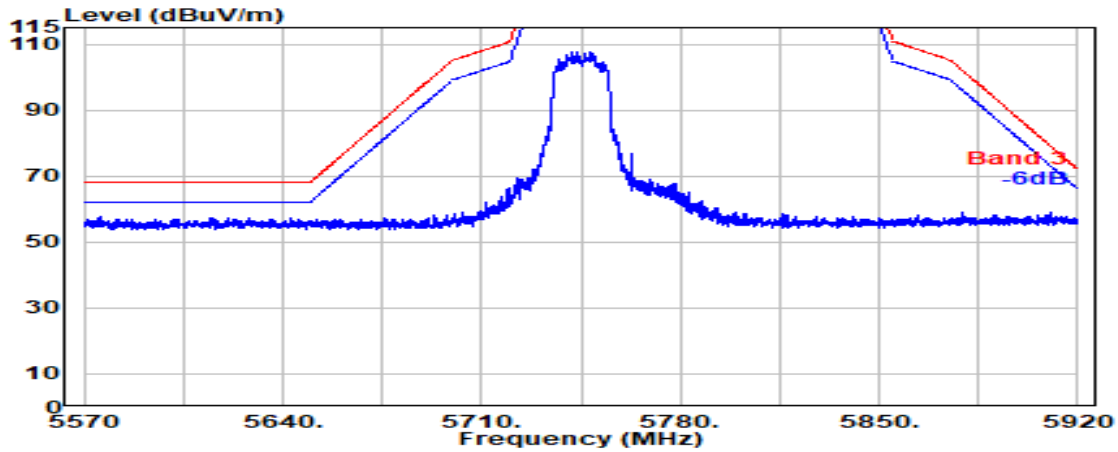


Antenna at Vertical Polarization

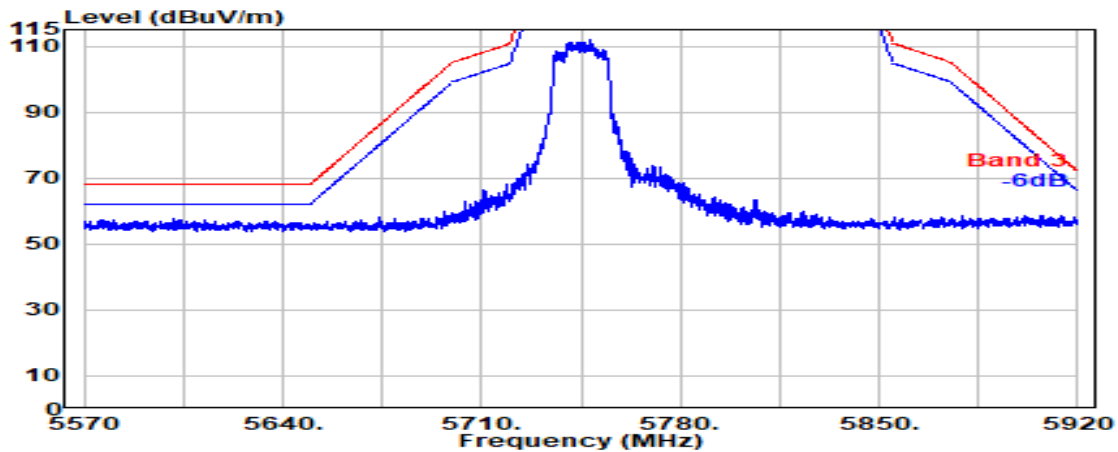


Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

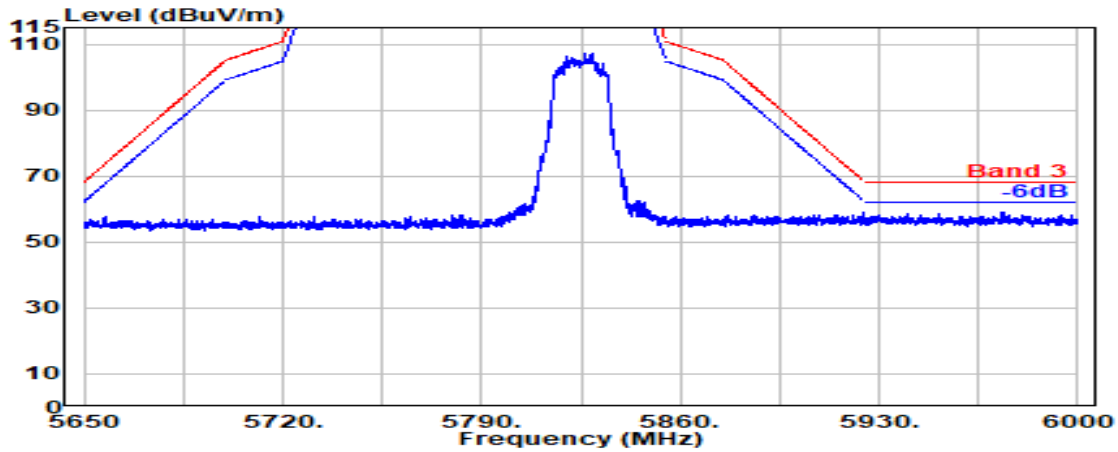

Antenna at Vertical Polarization

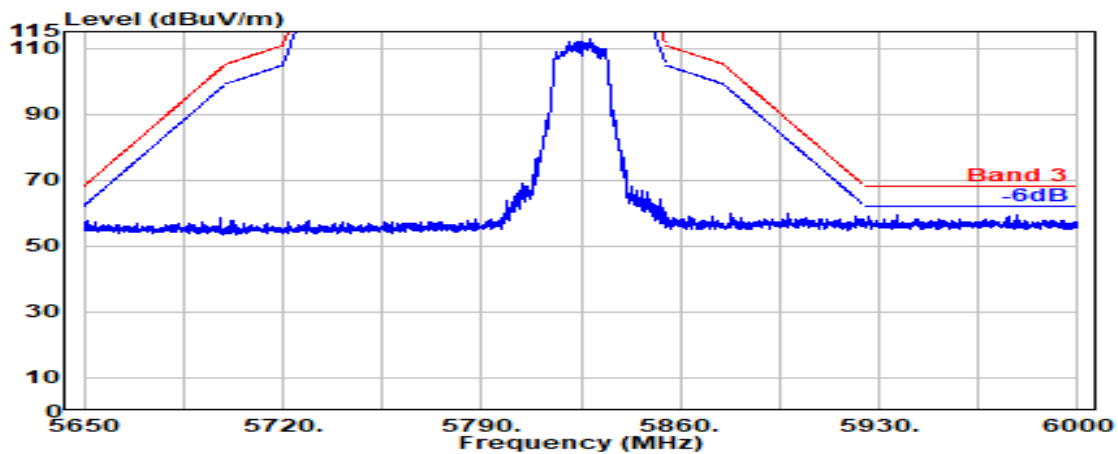


Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

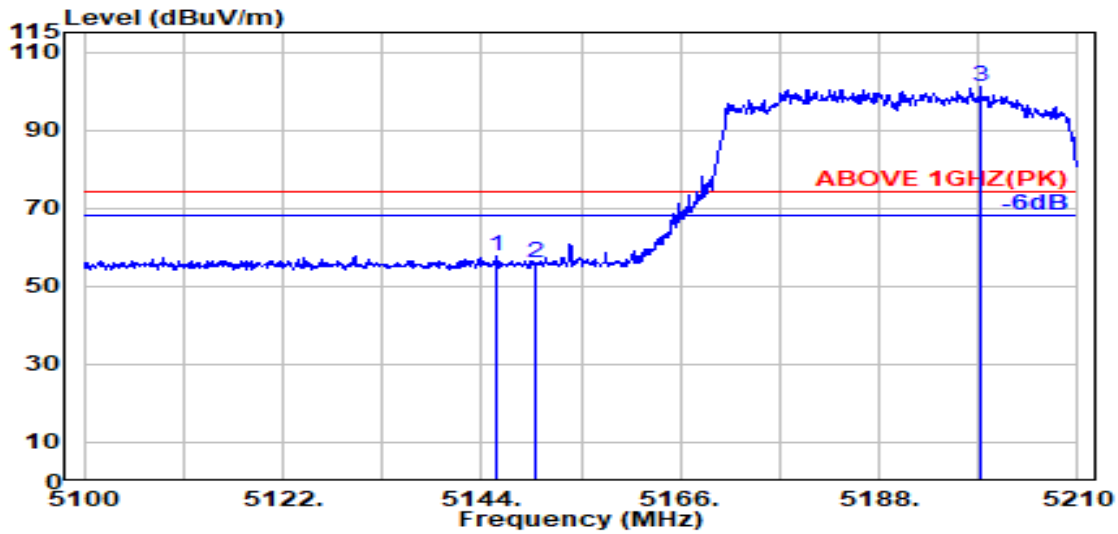

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	33.49	8.37	39.27	55.28	57.87	74.00	16.13	Peak
5150.000	33.50	8.37	39.27	53.55	56.16	74.00	17.84	Peak
@ 5199.200	33.80	8.42	39.27	98.28	101.24	---	---	Peak

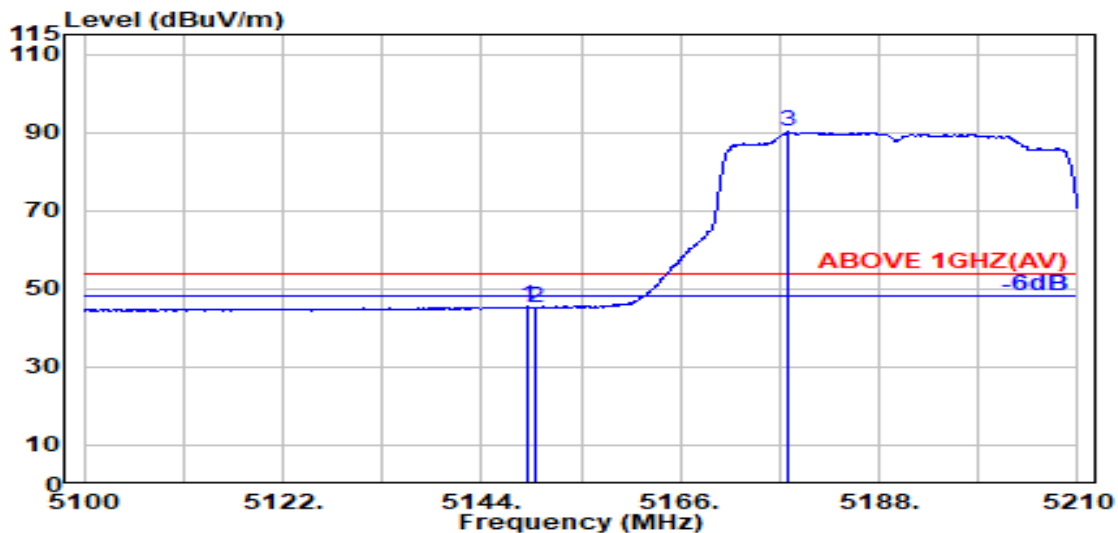


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.50	8.37	39.27	42.77	45.37	54.00	8.63	Average
5150.000	33.50	8.37	39.27	42.71	45.32	54.00	8.68	Average
@ 5177.900	33.67	8.40	39.27	87.35	90.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

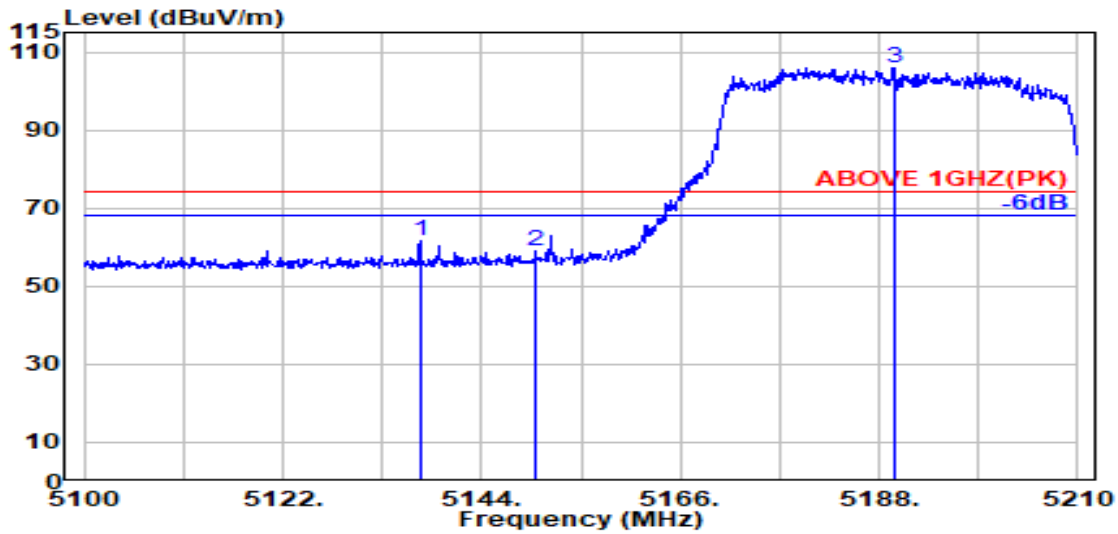

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.200	33.47	8.36	39.27	59.14	61.71	74.00	12.29	Peak
5150.000	33.50	8.37	39.27	56.45	59.05	74.00	14.95	Peak
@ 5189.600	33.74	8.41	39.27	103.14	106.03	---	---	Peak

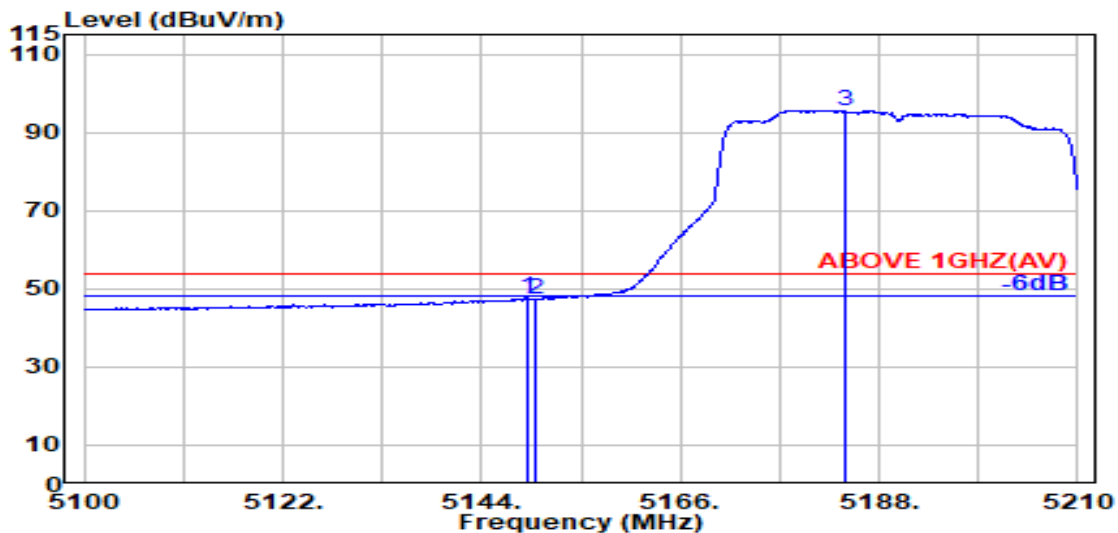


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.27	45.03	47.63	54.00	6.37	Average
5150.000	33.50	8.37	39.27	44.81	47.41	54.00	6.59	Average
@ 5184.300	33.71	8.41	39.27	92.84	95.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

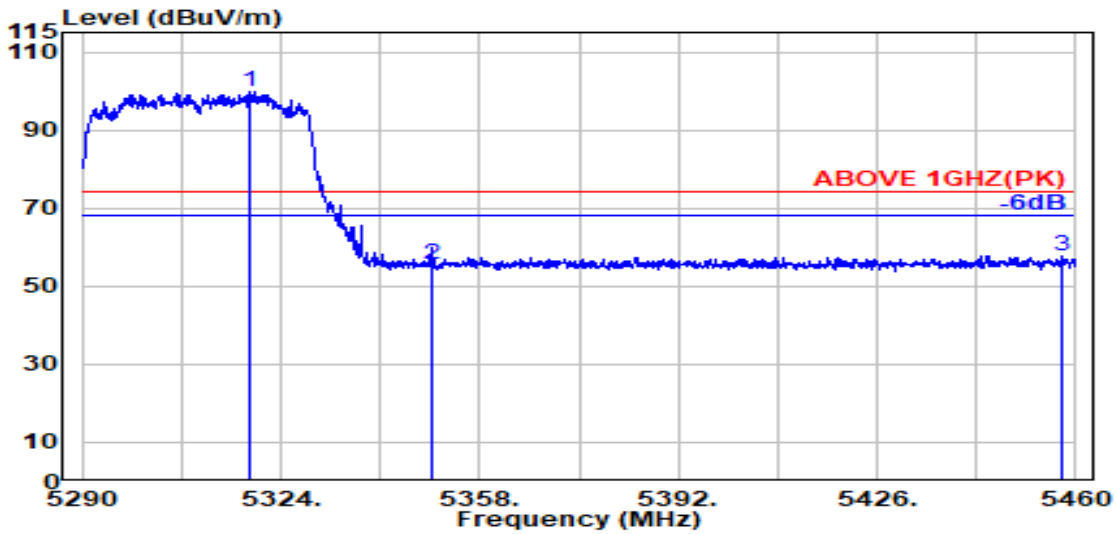

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.700	33.76	8.54	39.26	96.86	99.90	---	---	Peak
5350.000	33.70	8.57	39.26	52.51	55.53	74.00	18.47	Peak
5457.700	34.02	8.68	39.25	54.44	57.88	74.00	16.12	Peak

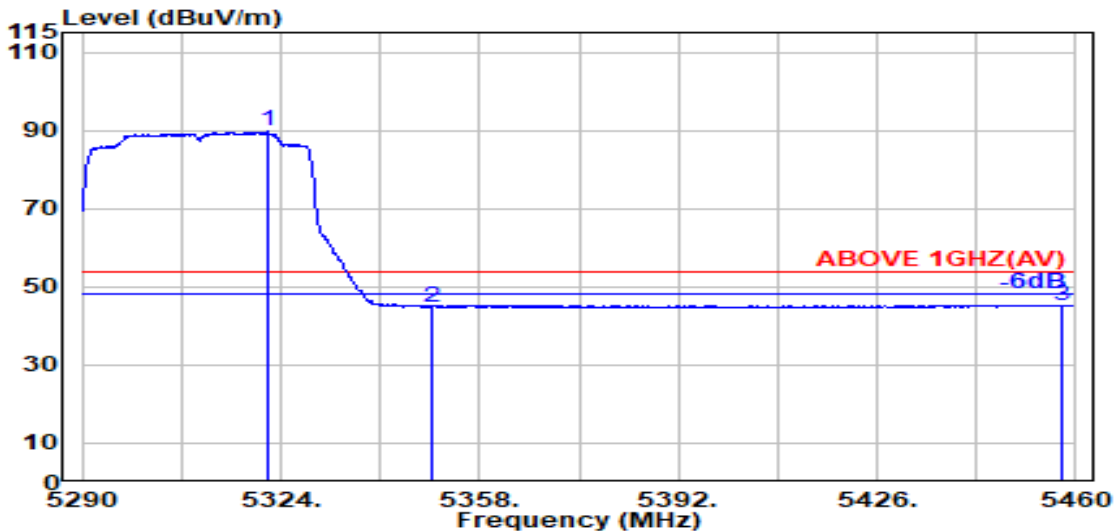


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	33.76	8.54	39.26	86.60	89.64	---	---	Average
5350.000	33.70	8.57	39.26	41.83	44.85	54.00	9.15	Average
5457.600	34.02	8.68	39.25	41.90	45.34	54.00	8.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

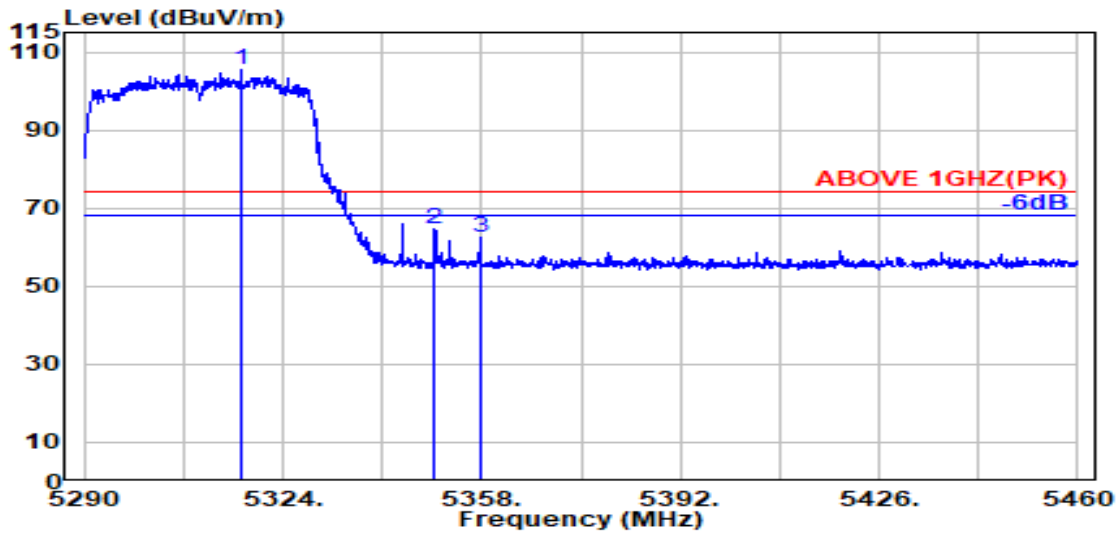

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	33.77	8.54	39.26	102.46	105.50	---	---	Peak
5350.000	33.70	8.57	39.26	61.53	64.54	74.00	9.46	Peak
5357.800	33.73	8.58	39.26	59.51	62.56	74.00	11.44	Peak

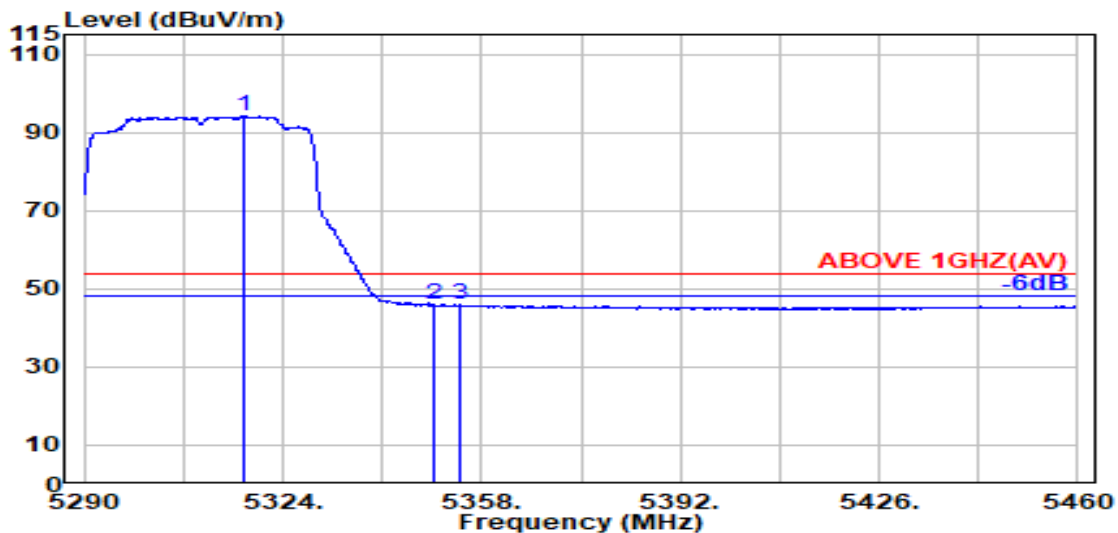


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.300	33.77	8.54	39.26	91.22	94.27	---	---	Average
5350.000	33.70	8.57	39.26	42.86	45.87	54.00	8.13	Average
5354.200	33.72	8.58	39.26	42.82	45.86	54.00	8.14	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

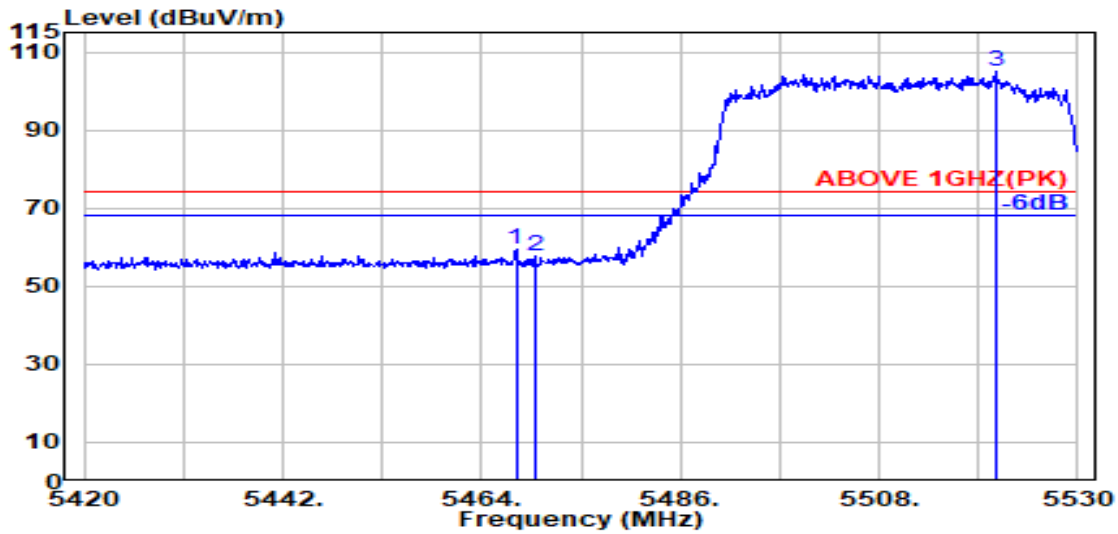

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.25	55.81	59.28	74.00	14.72	Peak
5470.000	34.04	8.69	39.25	54.45	57.93	74.00	16.07	Peak
@ 5520.900	34.06	8.74	39.25	101.30	104.84	---	---	Peak

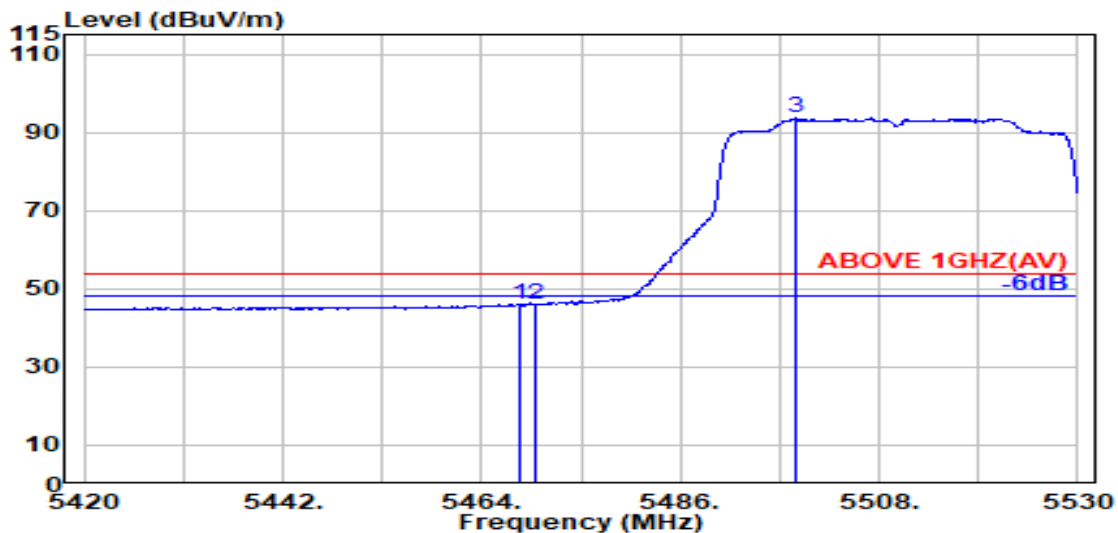


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.25	42.69	46.16	54.00	7.84	Average
5470.000	34.04	8.69	39.25	42.45	45.93	54.00	8.07	Average
@ 5498.700	34.10	8.72	39.25	90.11	93.67	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

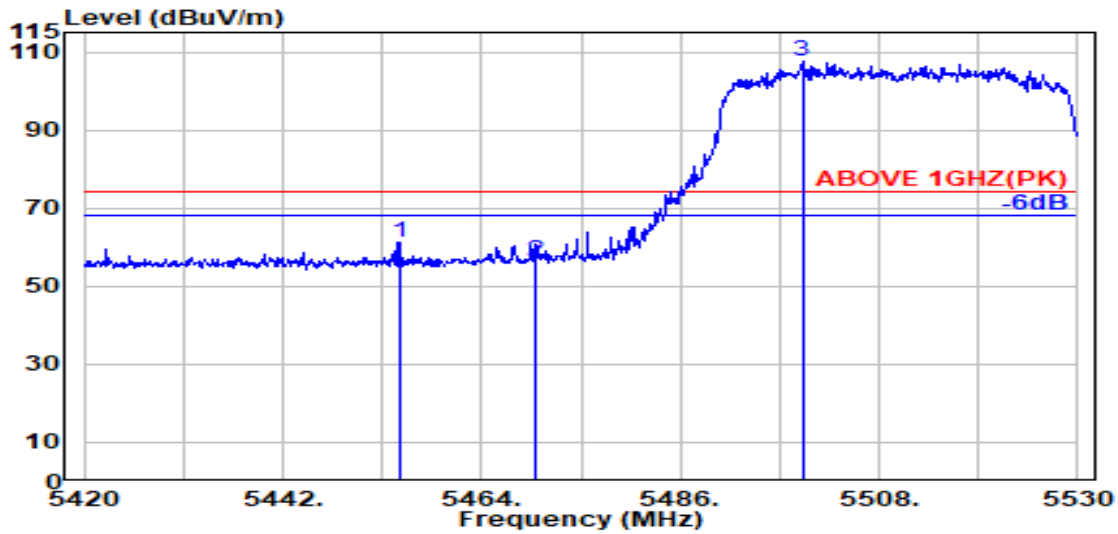

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.900	34.01	8.67	39.25	57.76	61.20	74.00	12.80	Peak
5470.000	34.04	8.69	39.25	52.95	56.43	74.00	17.57	Peak
@ 5499.500	34.10	8.72	39.25	103.86	107.43	---	---	Peak

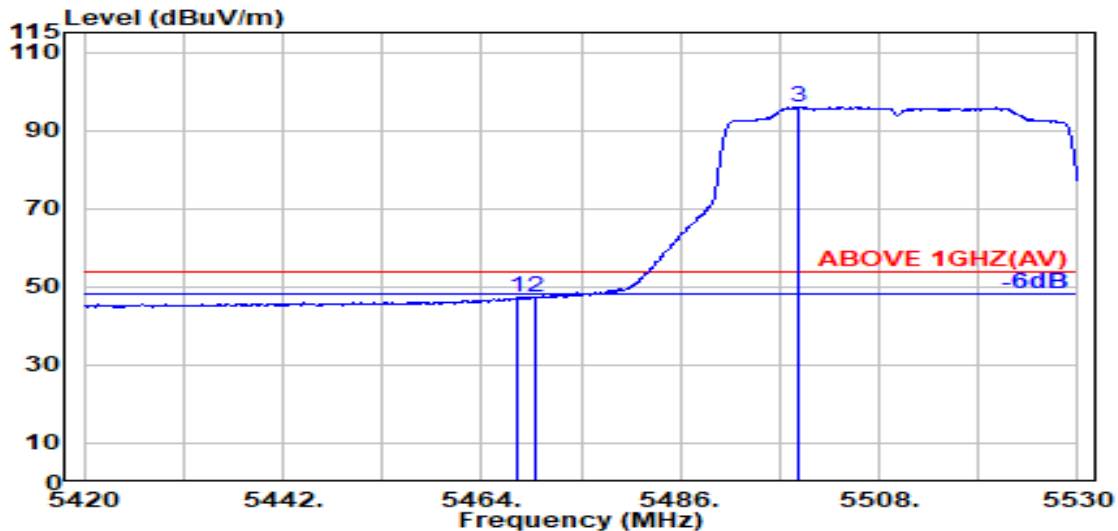


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.25	43.82	47.29	54.00	6.71	Average
5470.000	34.04	8.69	39.25	43.63	47.11	54.00	6.89	Average
@ 5499.100	34.10	8.72	39.25	92.40	95.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

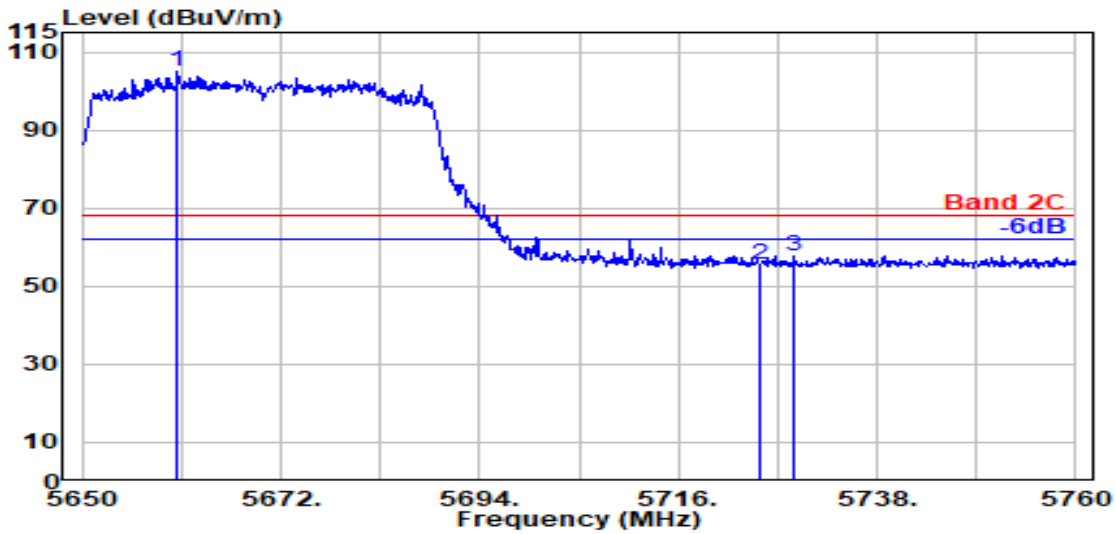

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5660.600	33.76	8.87	39.28	101.70	105.05	---	---	Peak
5725.000	33.60	8.93	39.29	52.41	55.64	68.20	12.56	Peak
5728.800	33.60	8.93	39.29	54.62	57.86	68.20	10.34	Peak

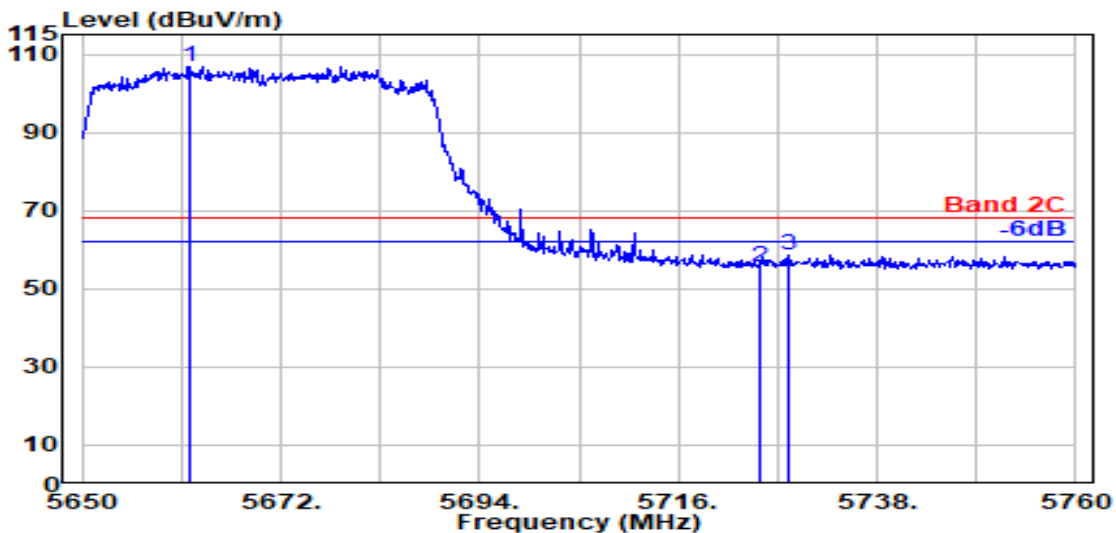


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.800	33.75	8.87	39.28	103.45	106.79	---	---	Peak
5725.000	33.60	8.93	39.29	52.48	55.72	68.20	12.48	Peak
5728.100	33.60	8.93	39.29	55.49	58.72	68.20	9.48	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

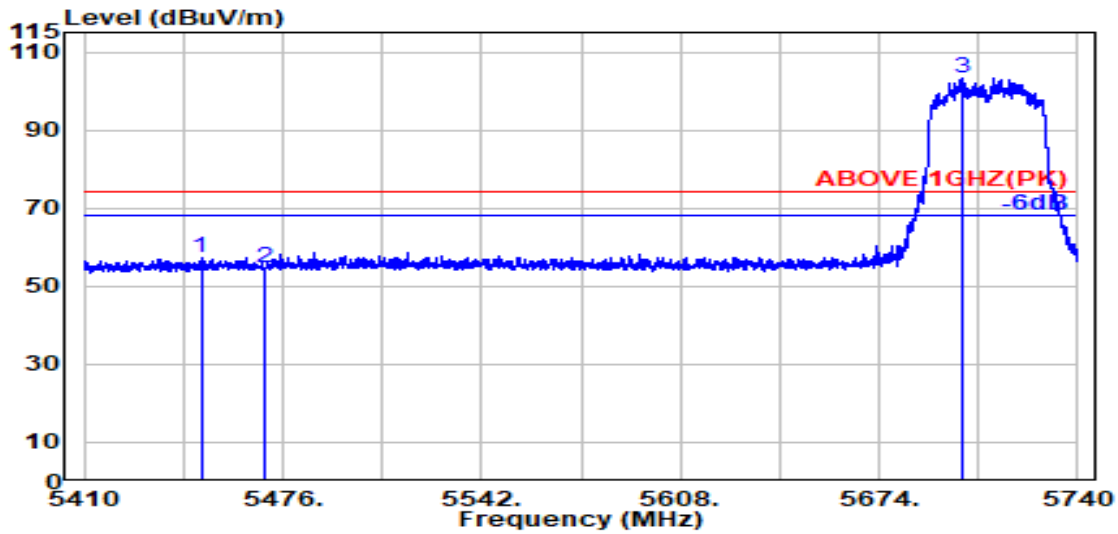

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.800	34.00	8.67	39.25	53.82	57.23	74.00	16.77	Peak
5470.000	34.04	8.69	39.25	51.31	54.79	74.00	19.21	Peak
@ 5701.500	33.60	8.90	39.29	100.03	103.25	---	---	Peak

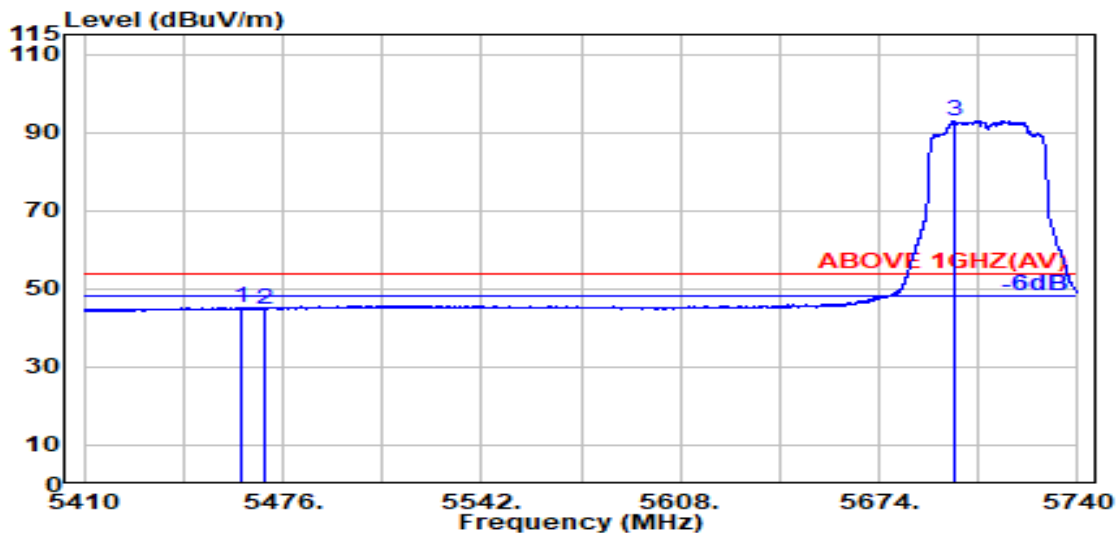


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.02	8.68	39.25	41.74	45.19	54.00	8.81	Average
5470.000	34.04	8.69	39.25	41.43	44.90	54.00	9.10	Average
@ 5698.700	33.61	8.90	39.29	89.73	92.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

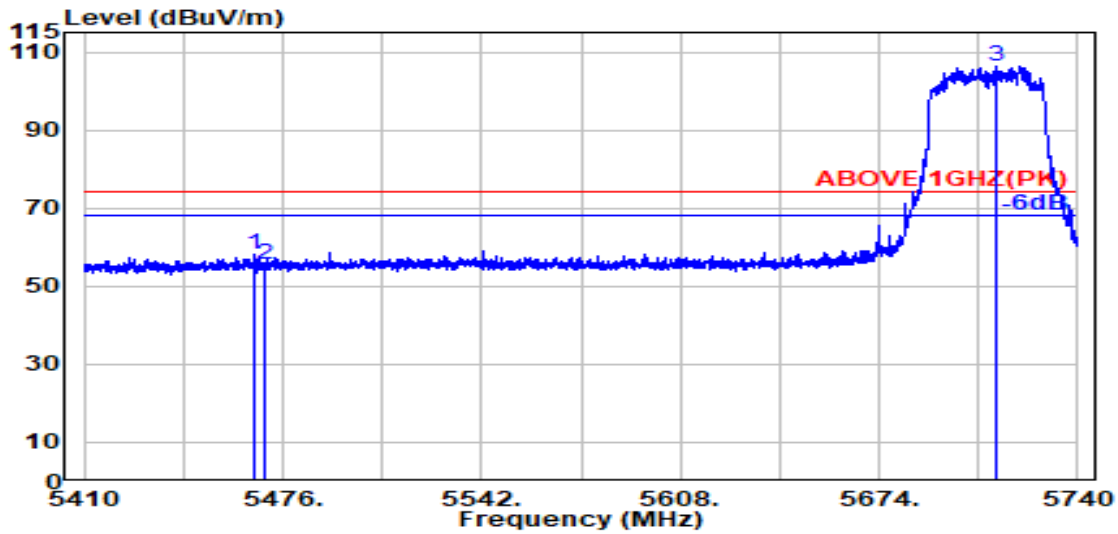

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.03	8.68	39.25	54.59	58.06	74.00	15.94	Peak
5470.000	34.04	8.69	39.25	52.25	55.73	74.00	18.27	Peak
@ 5713.200	33.60	8.91	39.29	103.28	106.51	---	---	Peak

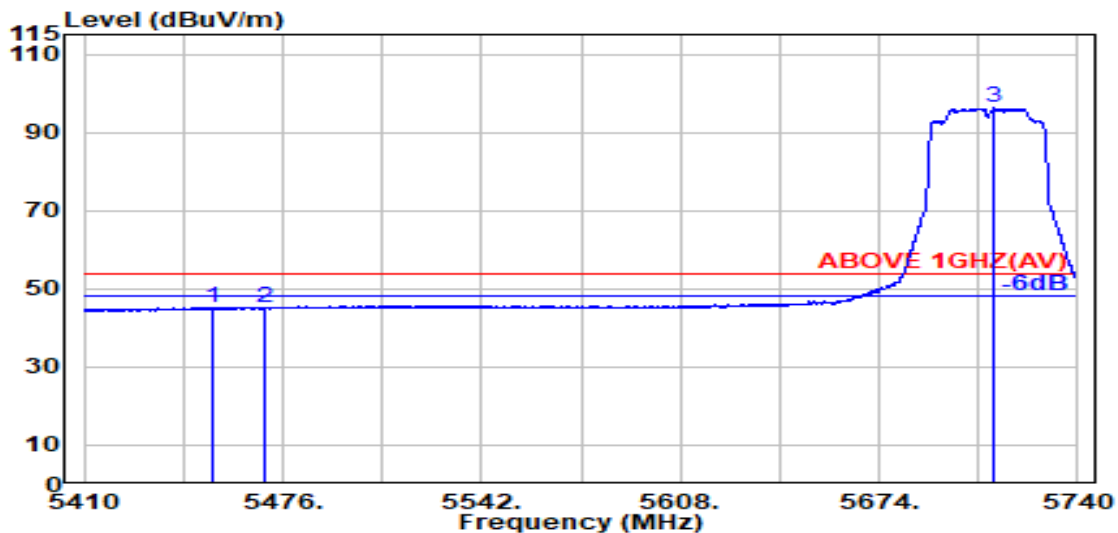


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.800	34.01	8.67	39.25	41.90	45.33	54.00	8.67	Average
5470.000	34.04	8.69	39.25	41.53	45.01	54.00	8.99	Average
@ 5712.300	33.60	8.91	39.29	92.93	96.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

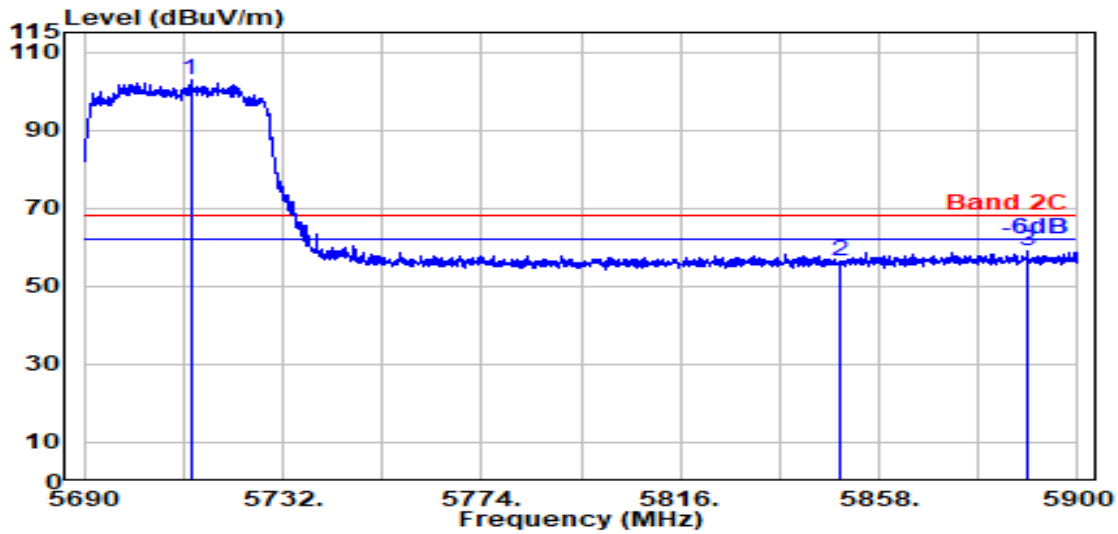

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.500	33.60	8.91	39.29	99.63	102.85	---	---	Peak
5850.000	33.90	9.04	39.31	52.84	56.46	68.20	11.74	Peak
5889.300	34.06	9.07	39.32	55.17	58.98	68.20	9.22	Peak

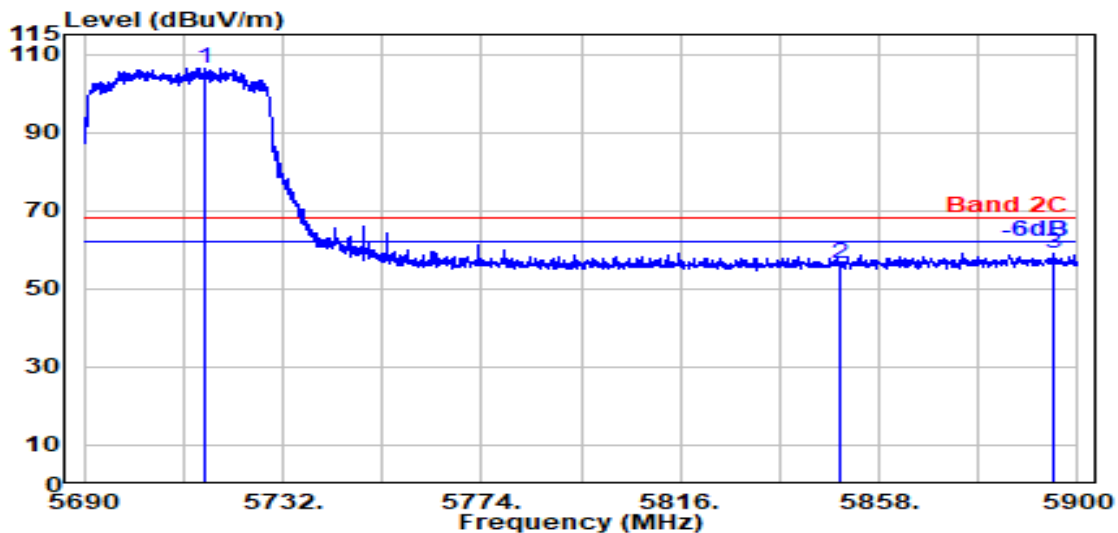


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.300	33.60	8.92	39.29	103.24	106.47	---	---	Peak
5850.000	33.90	9.04	39.31	52.89	56.51	68.20	11.69	Peak
5895.100	34.08	9.08	39.32	55.39	59.23	68.20	8.97	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

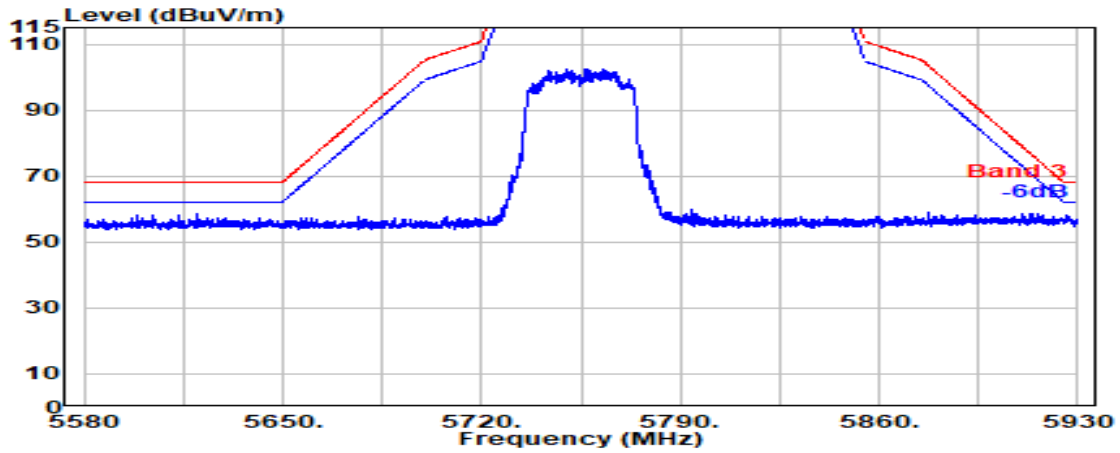


Antenna at Vertical Polarization

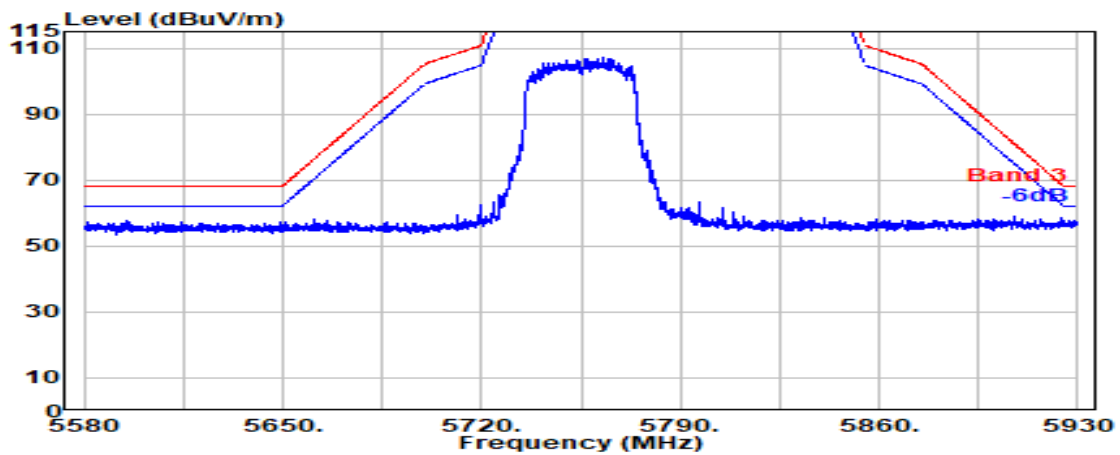


Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

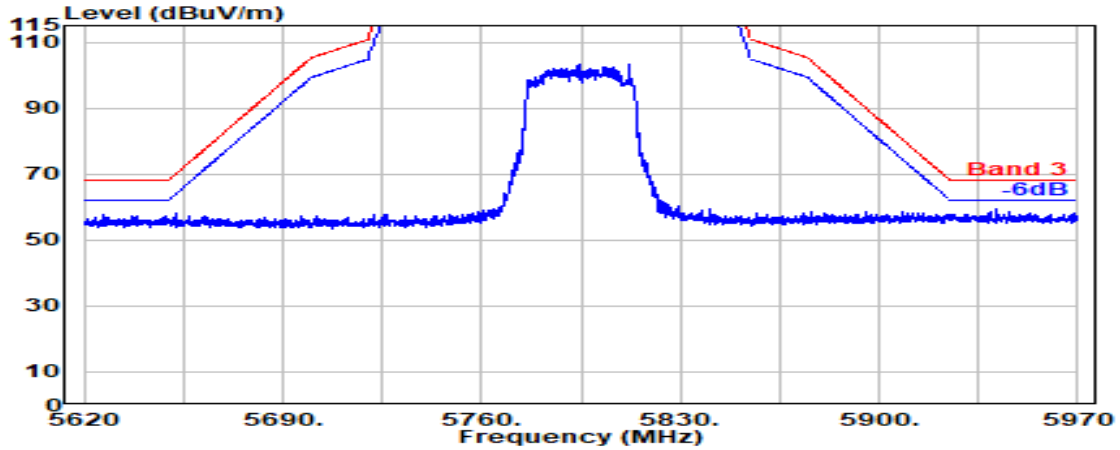

Antenna at Vertical Polarization

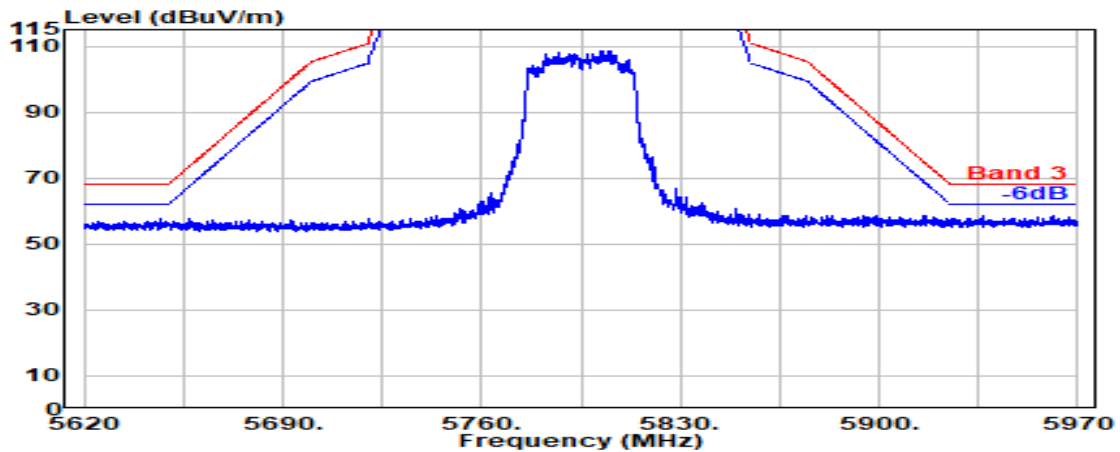


Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

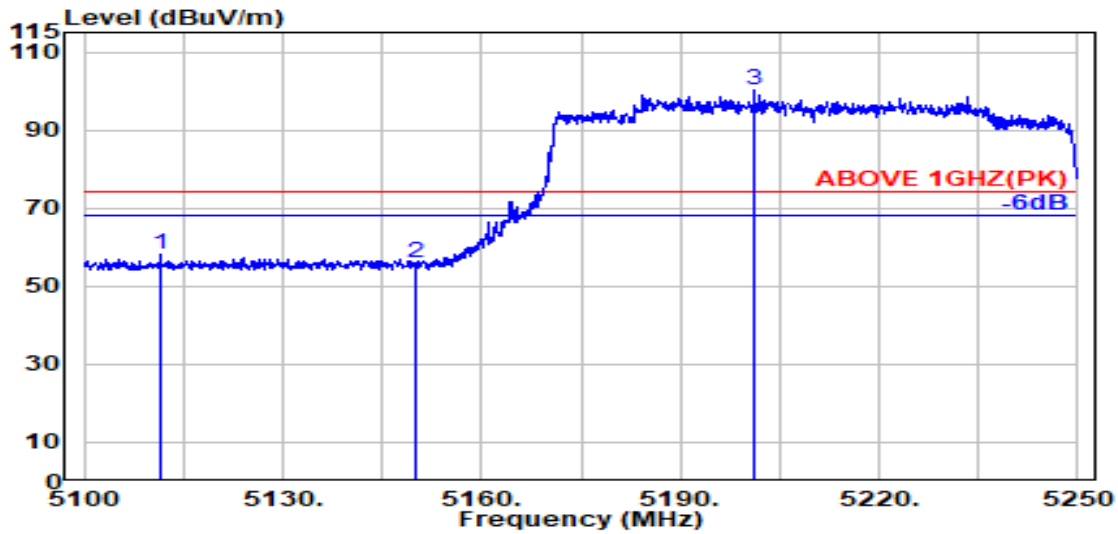

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.600	33.42	8.34	39.27	55.49	57.97	74.00	16.03	Peak
5150.000	33.50	8.37	39.27	53.47	56.07	74.00	17.93	Peak
@ 5201.200	33.80	8.43	39.27	97.31	100.26	---	---	Peak

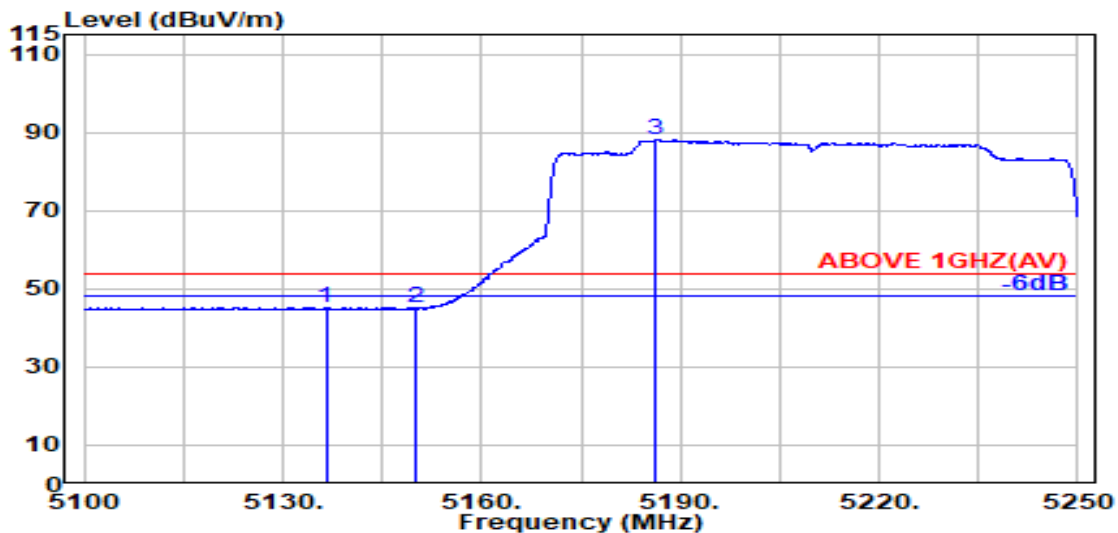


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.500	33.47	8.36	39.27	42.67	45.23	54.00	8.77	Average
5150.000	33.50	8.37	39.27	42.54	45.14	54.00	8.86	Average
@ 5186.300	33.72	8.41	39.27	85.27	88.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

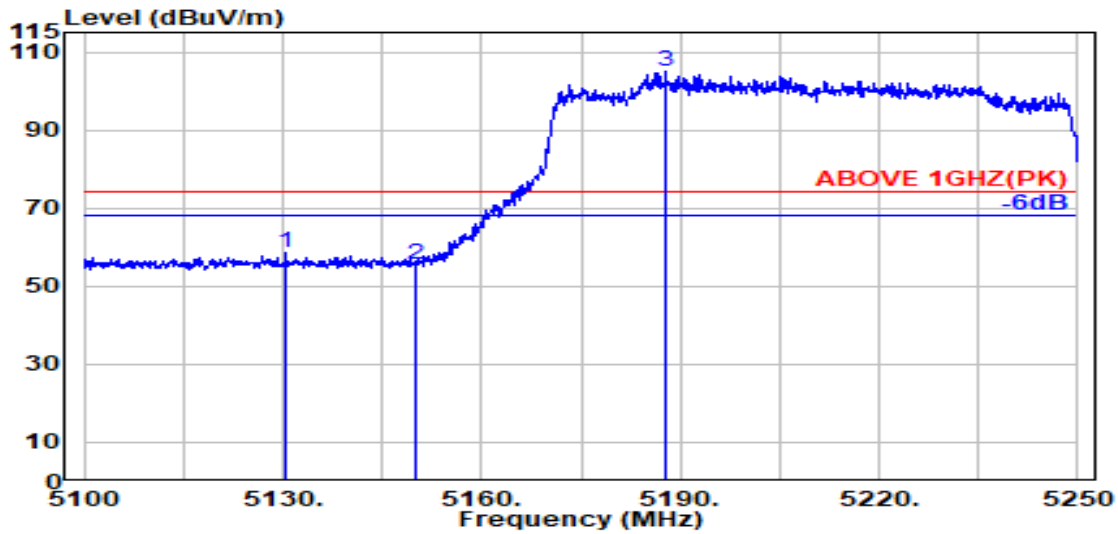

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.400	33.46	8.35	39.27	56.01	58.55	74.00	15.45	Peak
5150.000	33.50	8.37	39.27	53.04	55.65	74.00	18.35	Peak
@ 5187.700	33.73	8.41	39.27	102.20	105.07	---	---	Peak

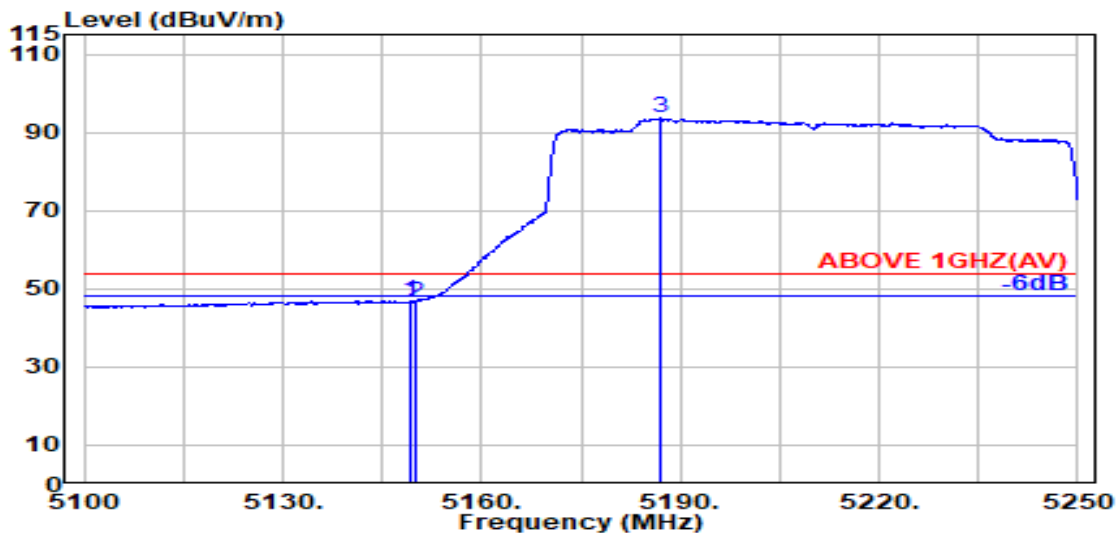


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.27	44.39	46.99	54.00	7.01	Average
5150.000	33.50	8.37	39.27	43.92	46.52	54.00	7.48	Average
@ 5187.100	33.72	8.41	39.27	90.90	93.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

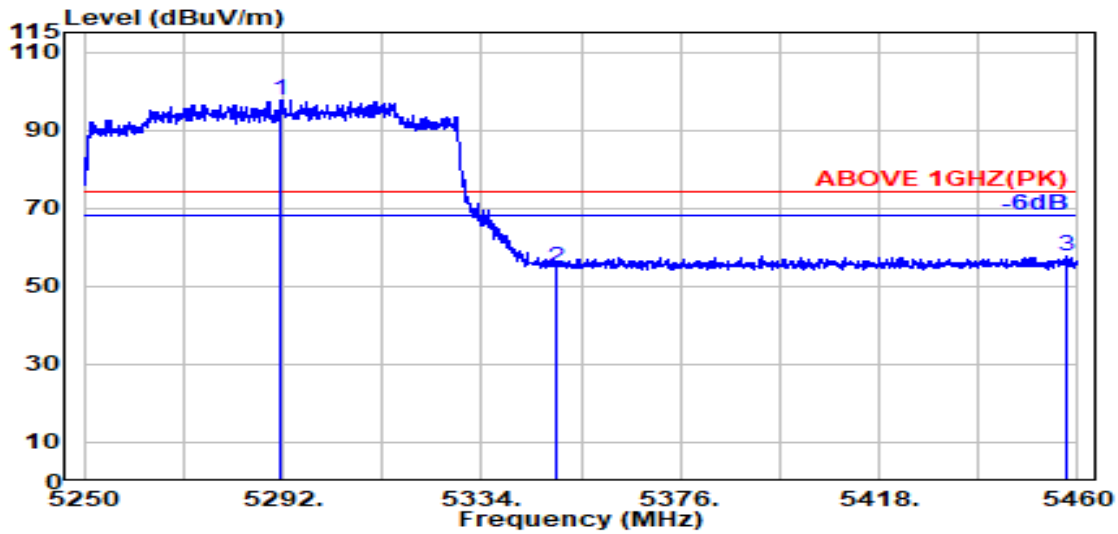

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.700	33.78	8.52	39.26	94.82	97.85	---	---	Peak
5350.000	33.70	8.57	39.26	51.82	54.83	74.00	19.17	Peak
5457.400	34.01	8.68	39.25	54.22	57.66	74.00	16.34	Peak

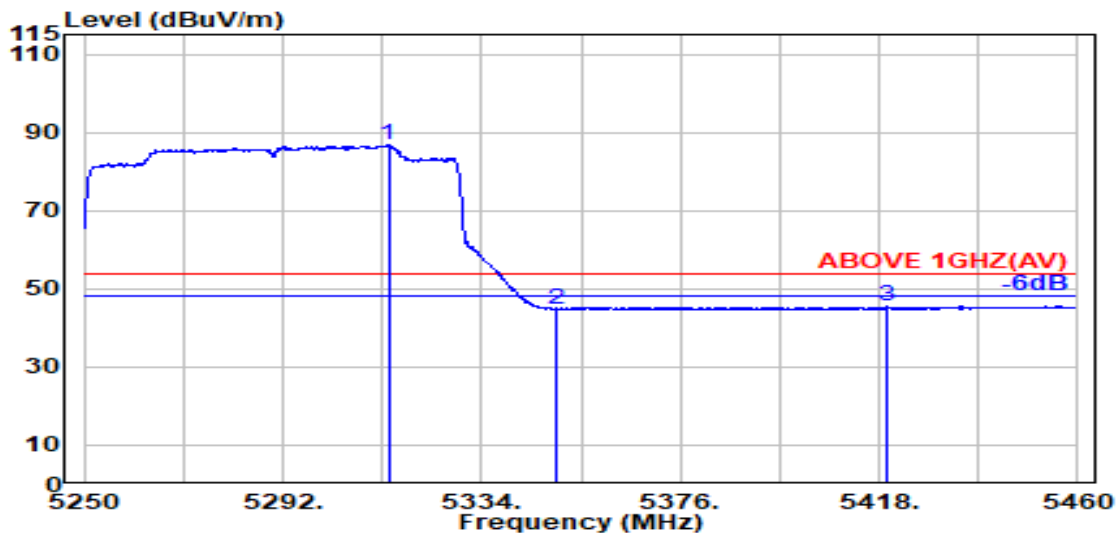


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.300	33.77	8.54	39.26	83.65	86.70	---	---	Average
5350.000	33.70	8.57	39.26	41.78	44.79	54.00	9.21	Average
5419.800	33.94	8.64	39.25	42.23	45.56	54.00	8.44	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

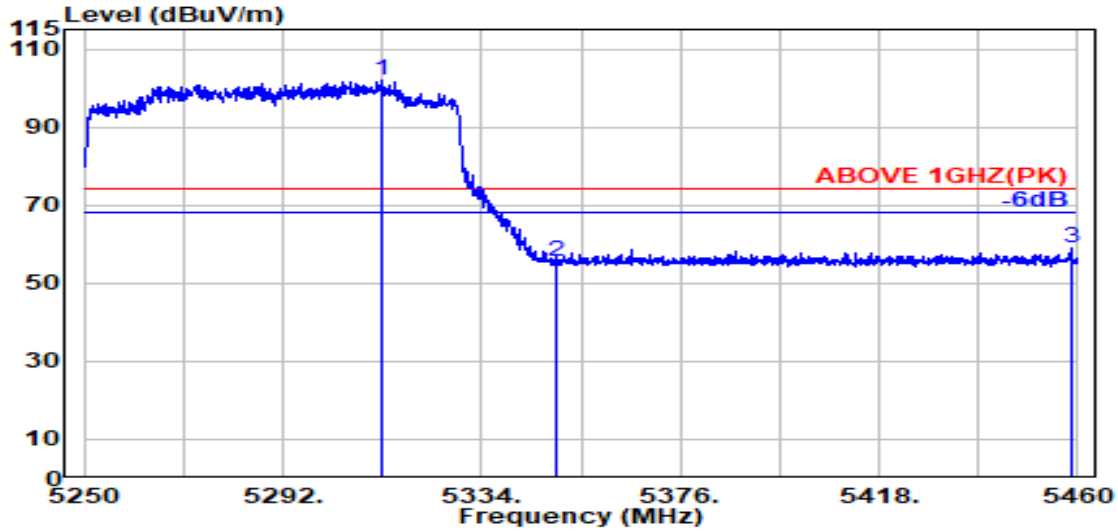

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.900	33.77	8.54	39.26	98.84	101.89	---	---	Peak
5350.000	33.70	8.57	39.26	52.61	55.63	74.00	18.37	Peak
5458.500	34.02	8.68	39.25	55.41	58.85	74.00	15.15	Peak

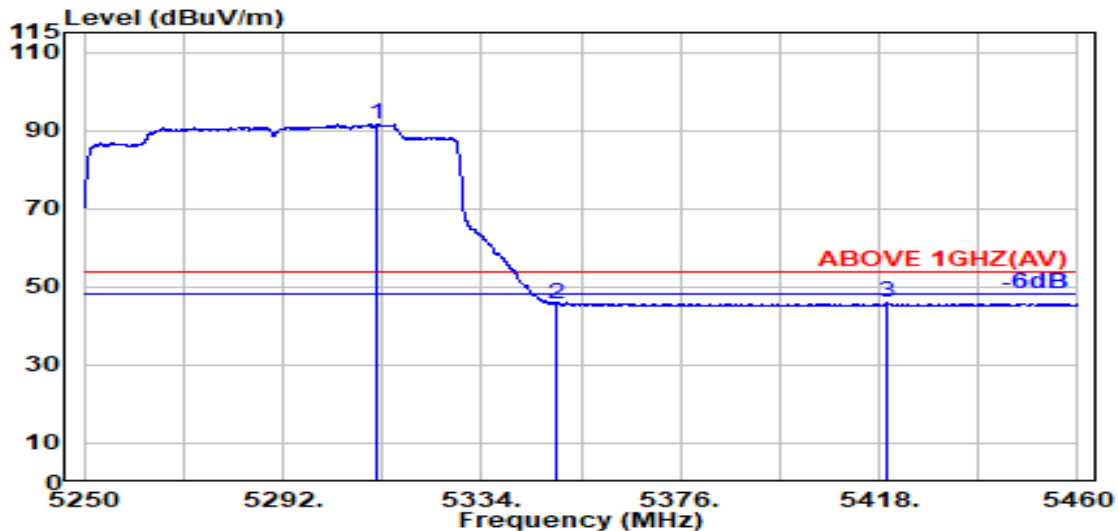


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.000	33.78	8.54	39.26	88.45	91.50	---	---	Average
5350.000	33.70	8.57	39.26	42.58	45.60	54.00	8.40	Average
5419.700	33.94	8.64	39.25	42.52	45.85	54.00	8.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

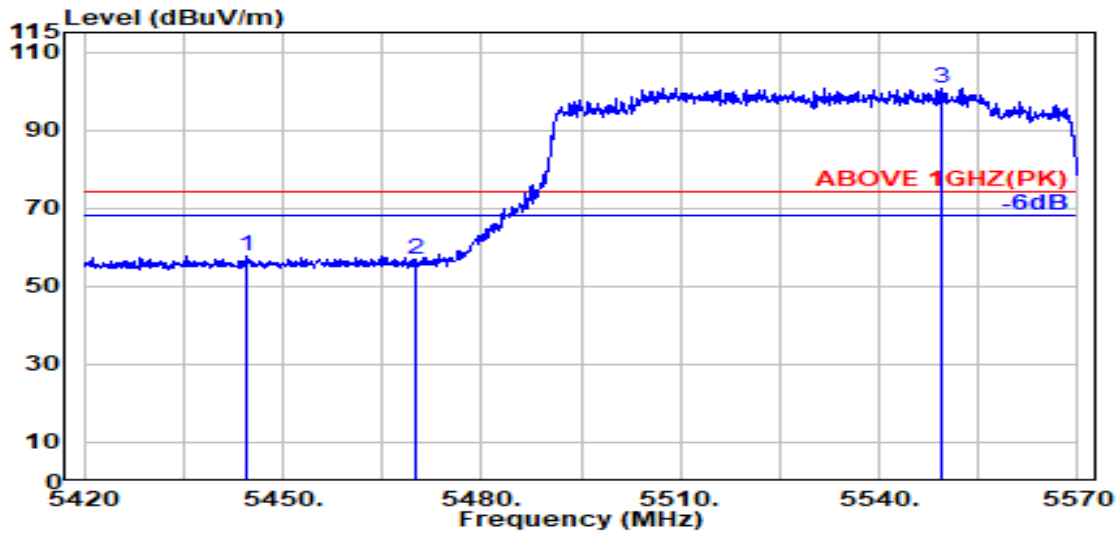

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.600	33.99	8.66	39.25	54.51	57.91	74.00	16.09	Peak
5470.000	34.04	8.69	39.25	53.32	56.80	74.00	17.20	Peak
@ 5549.300	34.00	8.76	39.26	97.33	100.84	---	---	Peak

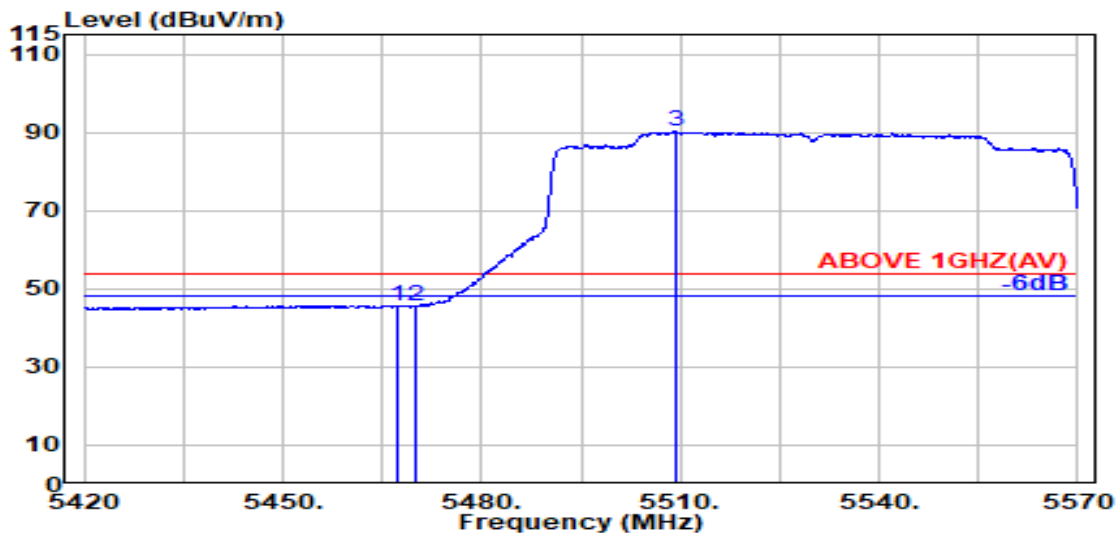


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.03	8.69	39.25	42.30	45.77	54.00	8.23	Average
5470.000	34.04	8.69	39.25	42.23	45.71	54.00	8.29	Average
@ 5509.500	34.08	8.73	39.25	86.56	90.12	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

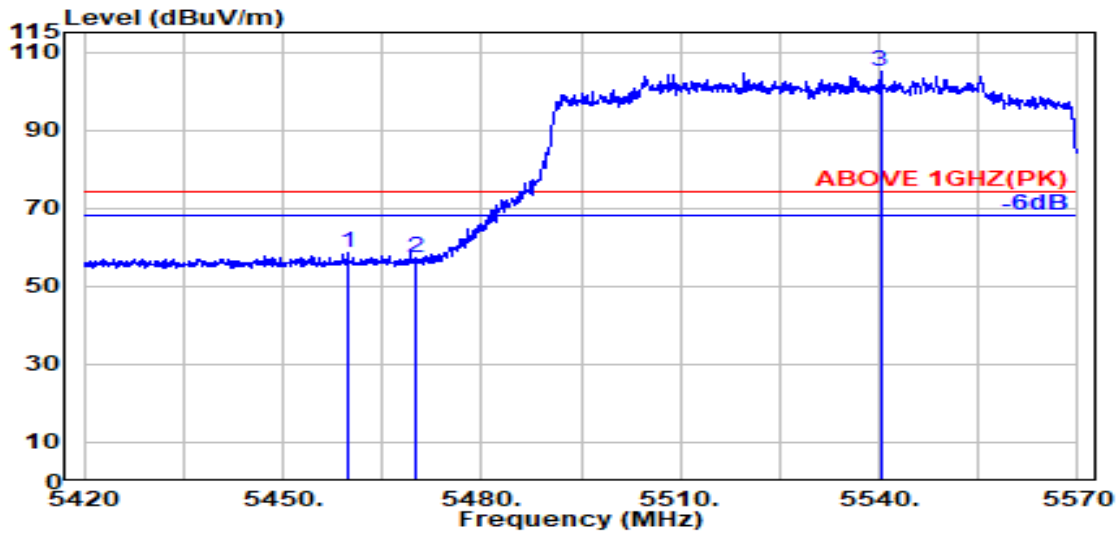

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.02	8.68	39.25	55.15	58.60	74.00	15.40	Peak
5470.000	34.04	8.69	39.25	53.71	57.19	74.00	16.81	Peak
@ 5540.200	34.02	8.75	39.26	101.39	104.90	---	---	Peak

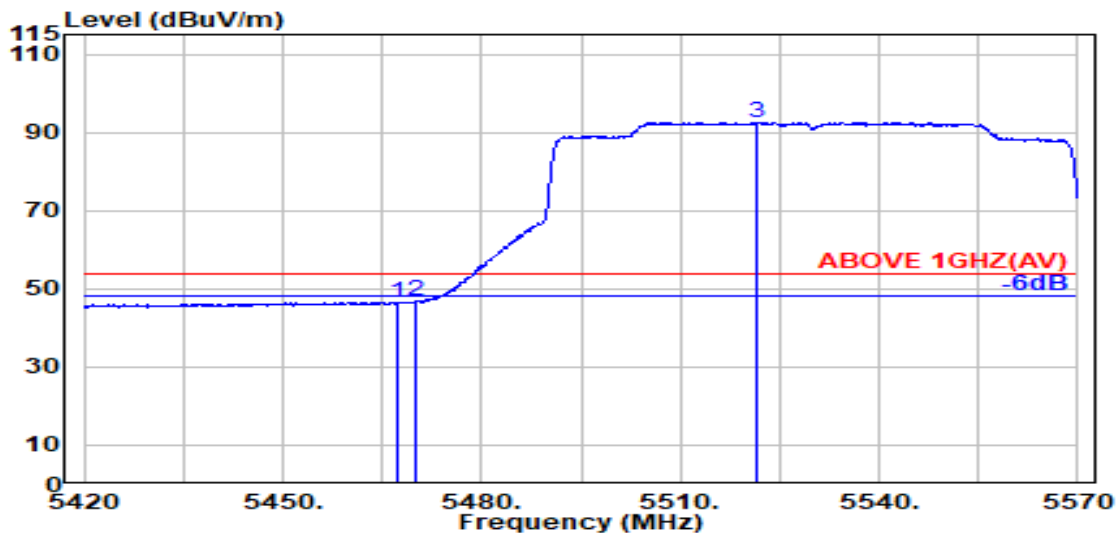


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.03	8.69	39.25	43.17	46.64	54.00	7.36	Average
5470.000	34.04	8.69	39.25	43.20	46.68	54.00	7.32	Average
@ 5521.500	34.06	8.74	39.25	88.98	92.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

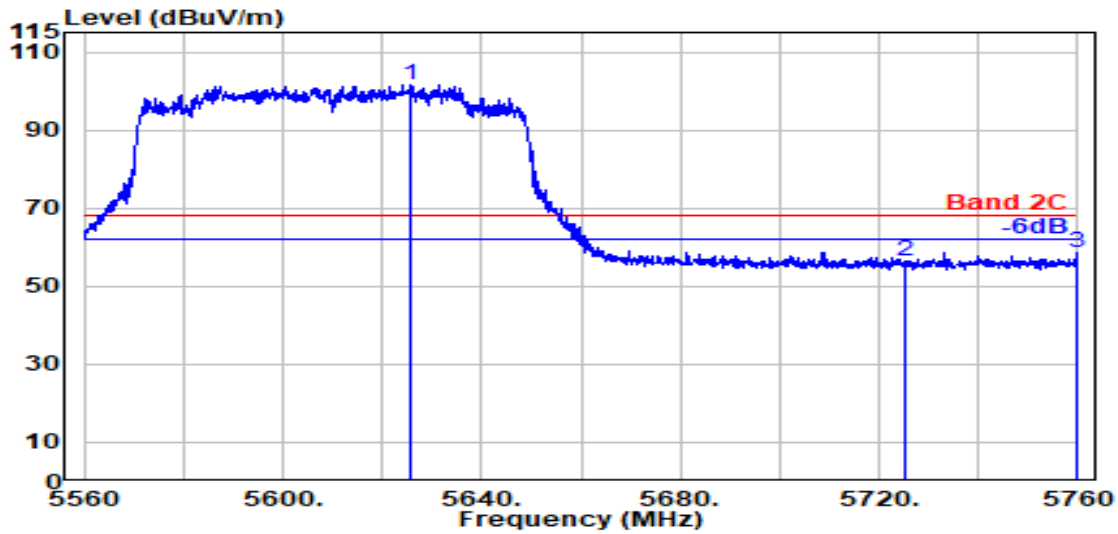

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5625.800	33.80	8.83	39.27	98.23	101.59	---	---	Peak
5725.000	33.60	8.93	39.29	53.33	56.56	68.20	11.64	Peak
5759.900	33.64	8.96	39.30	55.25	58.55	68.20	9.65	Peak

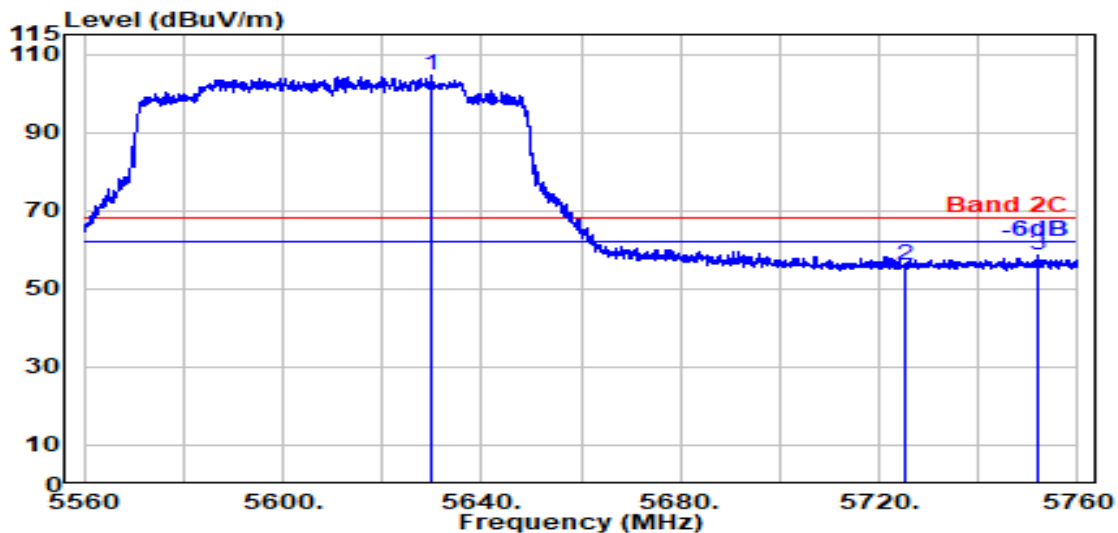


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5630.100	33.80	8.84	39.27	101.12	104.48	---	---	Peak
5725.000	33.60	8.93	39.29	52.77	56.01	68.20	12.19	Peak
5751.800	33.61	8.95	39.30	55.37	58.63	68.20	9.57	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

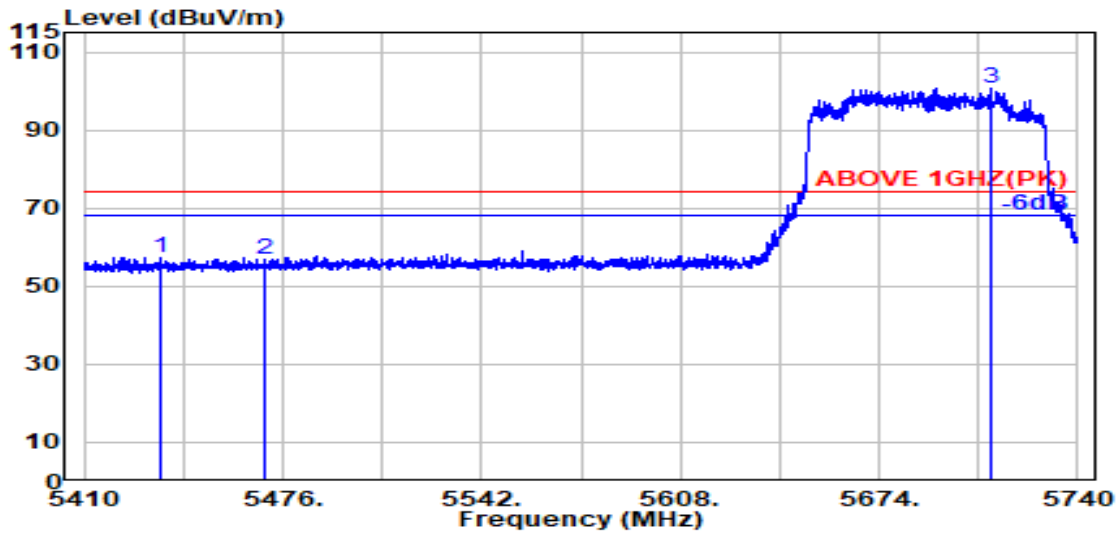

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.100	33.97	8.65	39.25	54.11	57.48	74.00	16.52	Peak
5470.000	34.04	8.69	39.25	53.17	56.65	74.00	17.35	Peak
@ 5711.300	33.60	8.91	39.29	97.46	100.68	---	---	Peak

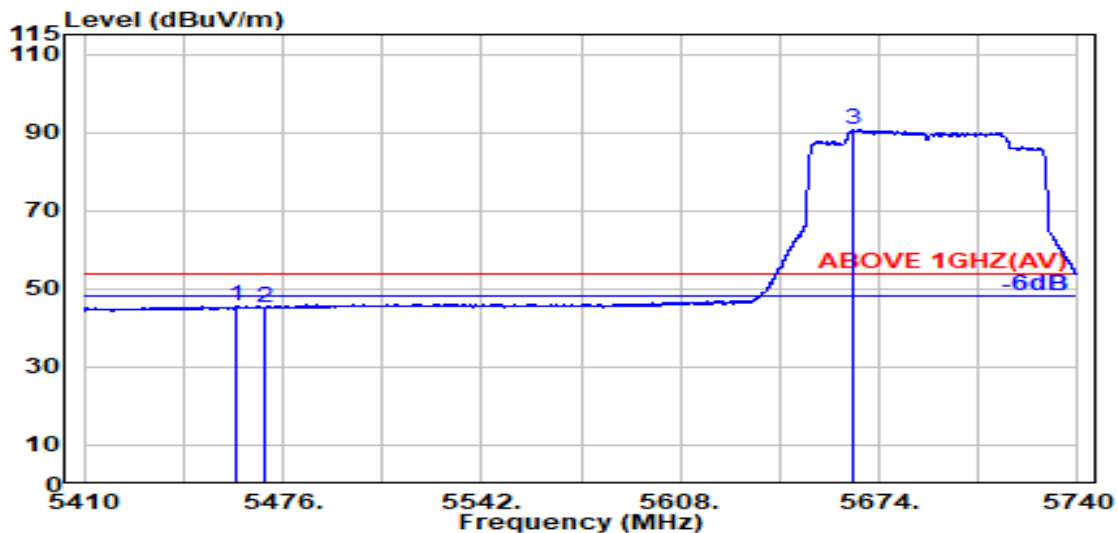


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.200	34.02	8.68	39.25	42.02	45.47	54.00	8.53	Average
5470.000	34.04	8.69	39.25	41.56	45.04	54.00	8.96	Average
@ 5665.600	33.74	8.87	39.28	87.32	90.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

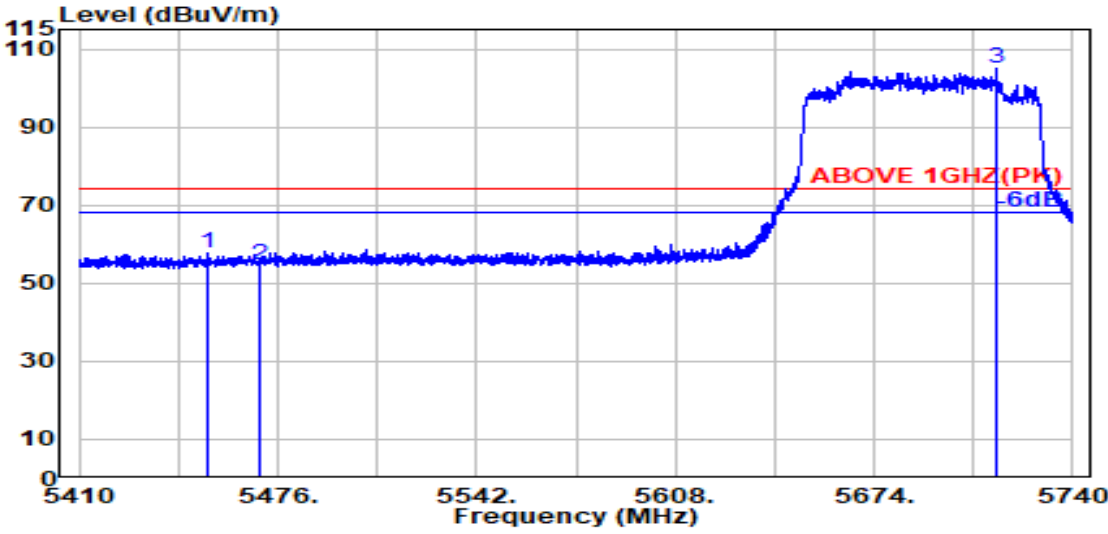

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.000	34.01	8.67	39.25	54.25	57.67	74.00	16.33	Peak
5470.000	34.04	8.69	39.25	51.42	54.90	74.00	19.10	Peak
@ 5714.600	33.60	8.92	39.29	101.75	104.97	---	---	Peak

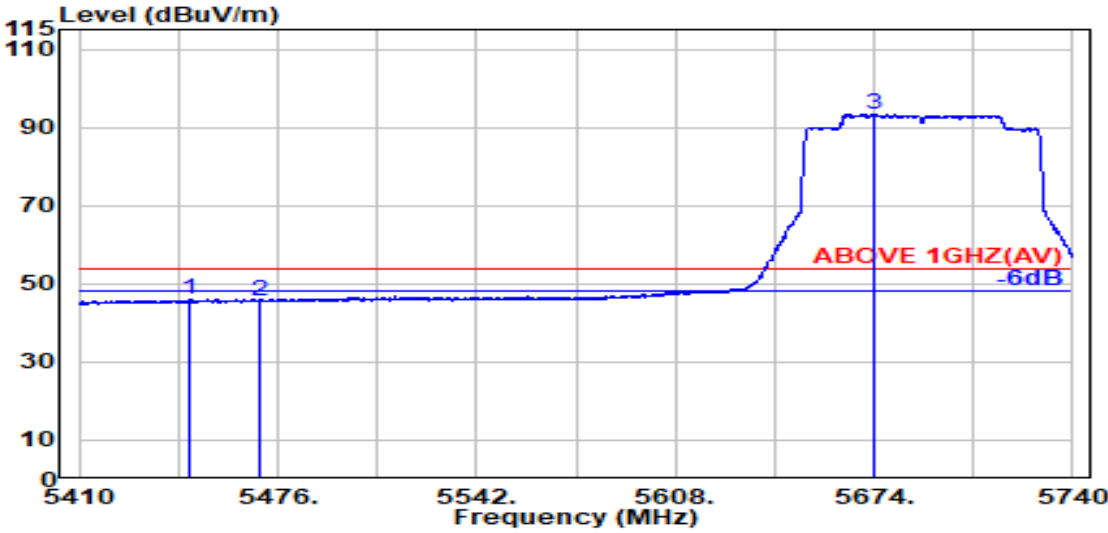


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.900	33.99	8.67	39.25	42.51	45.92	54.00	8.08	Average
5470.000	34.04	8.69	39.25	42.26	45.74	54.00	8.26	Average
@ 5673.900	33.70	8.88	39.28	89.96	93.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

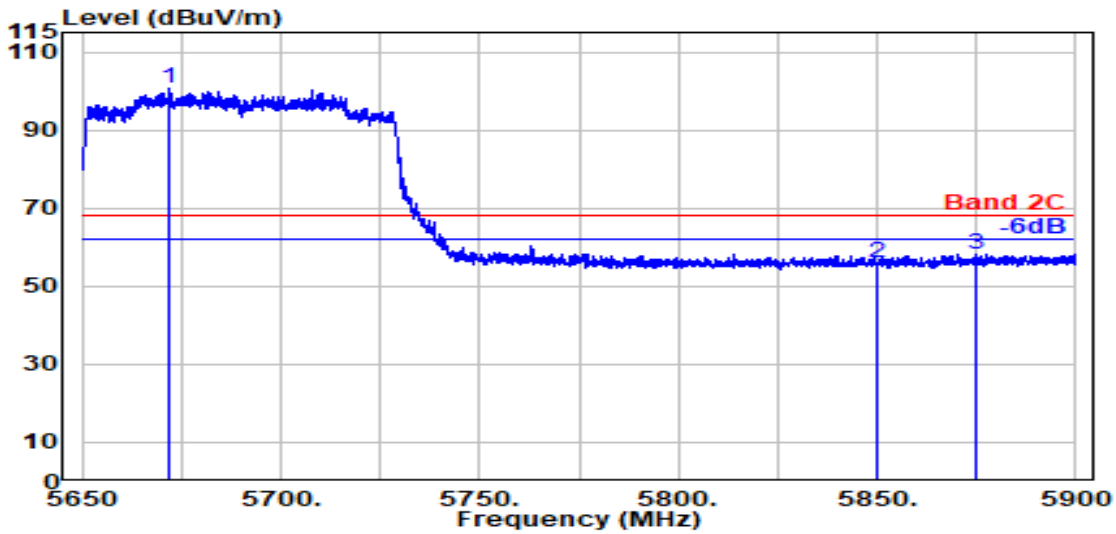

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.071	33.71	8.88	39.28	97.38	100.69	---	---	Peak
5850.000	33.90	9.04	39.31	52.41	56.04	68.20	12.16	Peak
5874.643	34.00	9.06	39.32	54.45	58.19	68.20	10.01	Peak

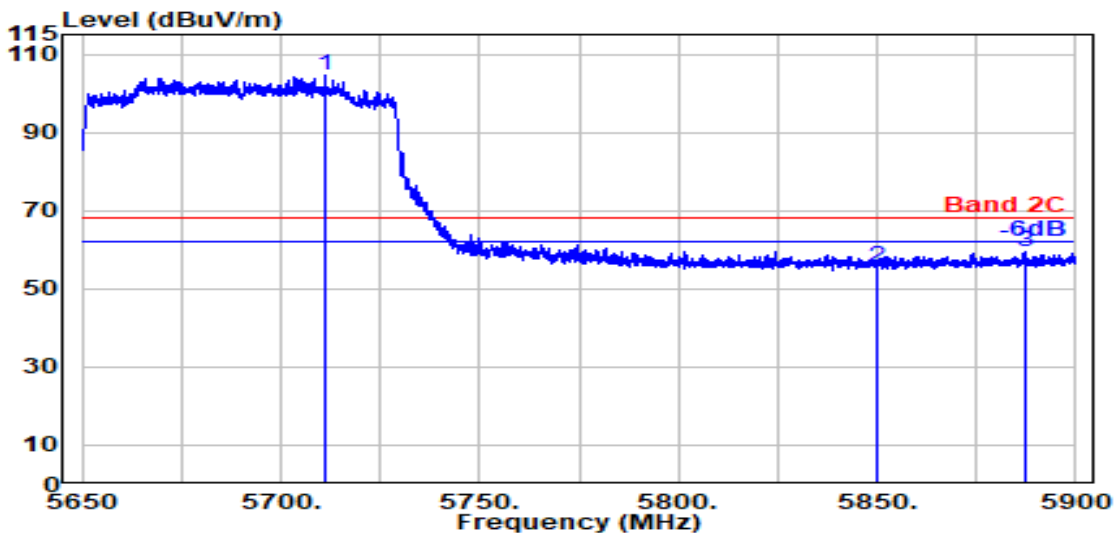


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.143	33.60	8.91	39.29	101.28	104.50	---	---	Peak
5850.000	33.90	9.04	39.31	52.13	55.75	68.20	12.45	Peak
5887.357	34.05	9.07	39.32	55.45	59.25	68.20	8.95	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

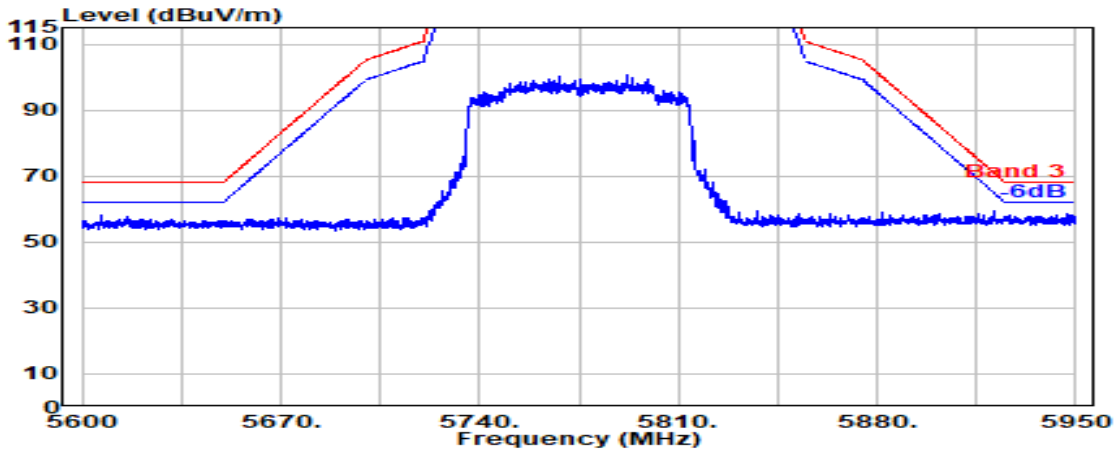

Antenna at Vertical Polarization

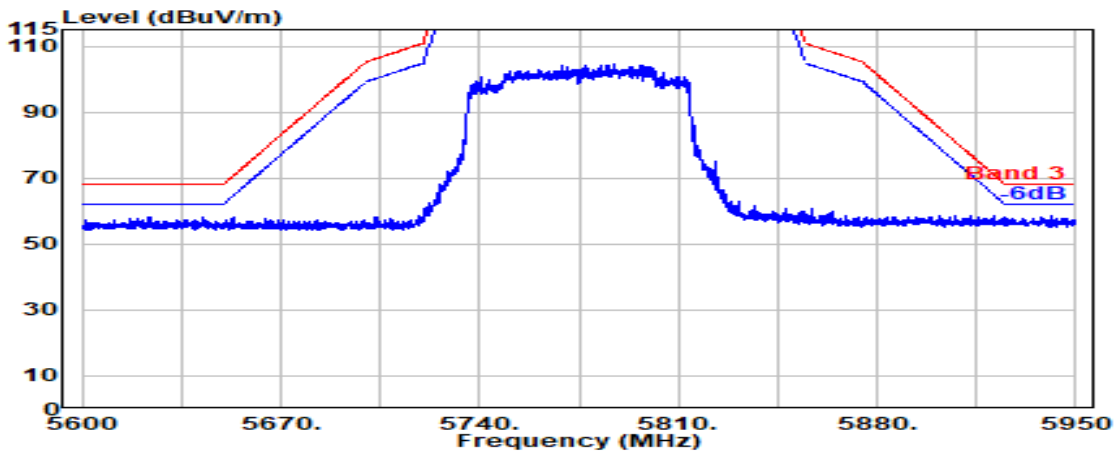


Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

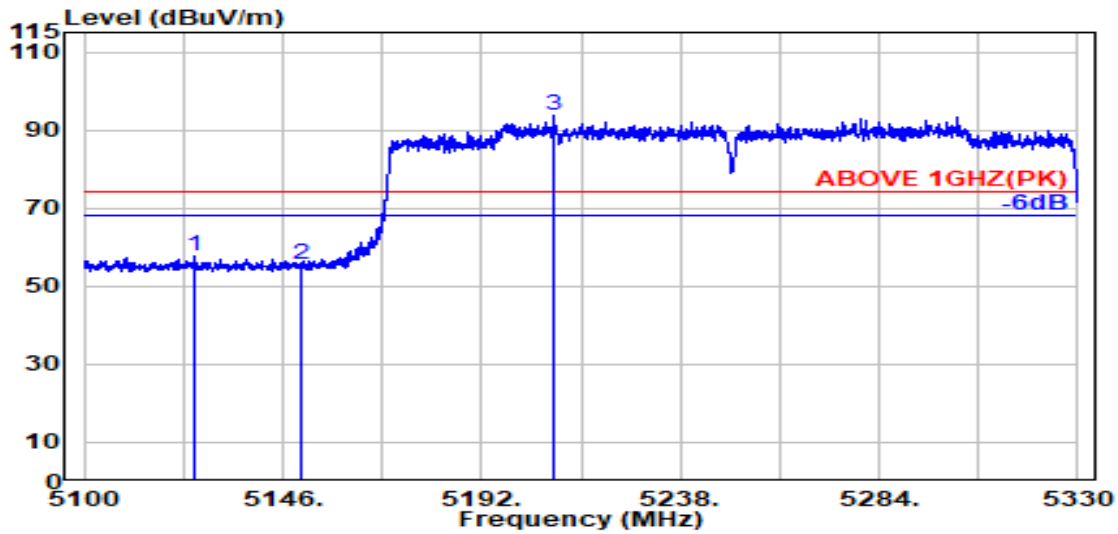

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.500	33.45	8.35	39.27	55.00	57.53	74.00	16.47	Peak
5150.000	33.50	8.37	39.27	53.05	55.66	74.00	18.34	Peak
@ 5208.800	33.78	8.43	39.27	90.87	93.82	---	---	Peak

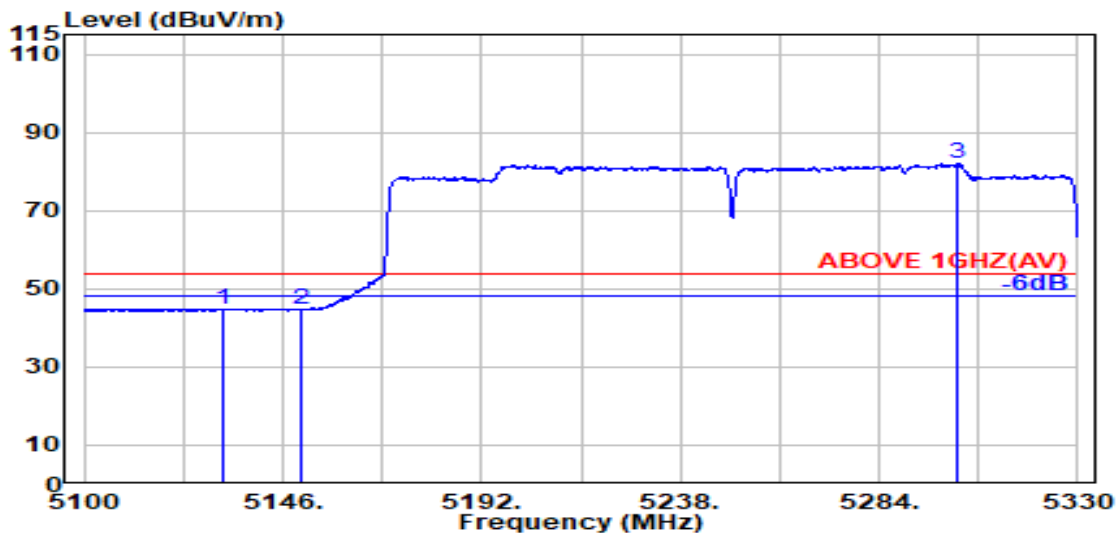


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.200	33.46	8.36	39.27	42.29	44.83	54.00	9.17	Average
5150.000	33.50	8.37	39.27	42.01	44.61	54.00	9.39	Average
@ 5302.300	33.80	8.53	39.26	79.02	82.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

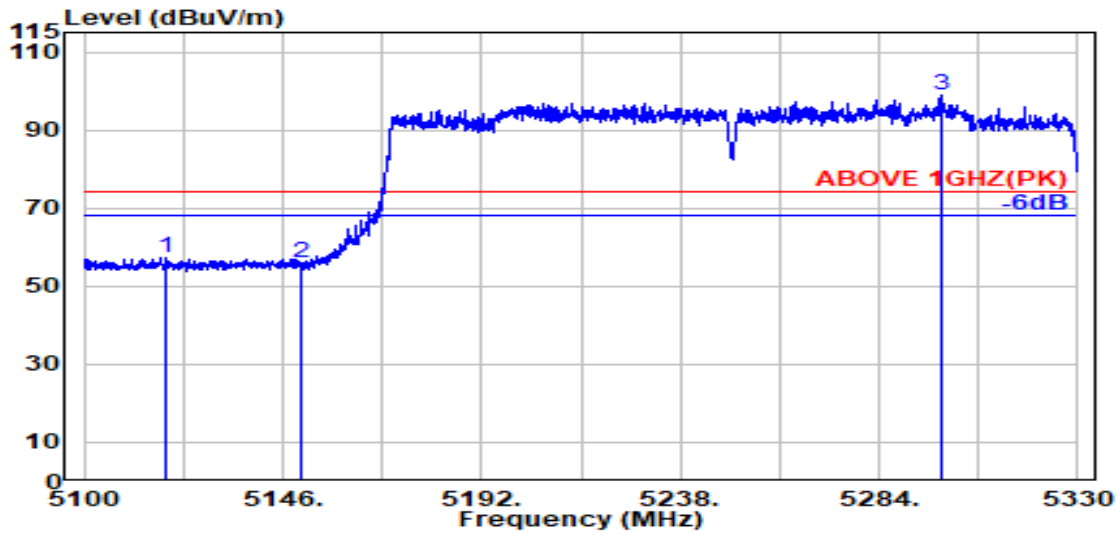

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.100	33.44	8.34	39.27	54.88	57.39	74.00	16.61	Peak
5150.000	33.50	8.37	39.27	53.33	55.94	74.00	18.06	Peak
@ 5298.200	33.80	8.52	39.26	95.76	98.82	---	---	Peak

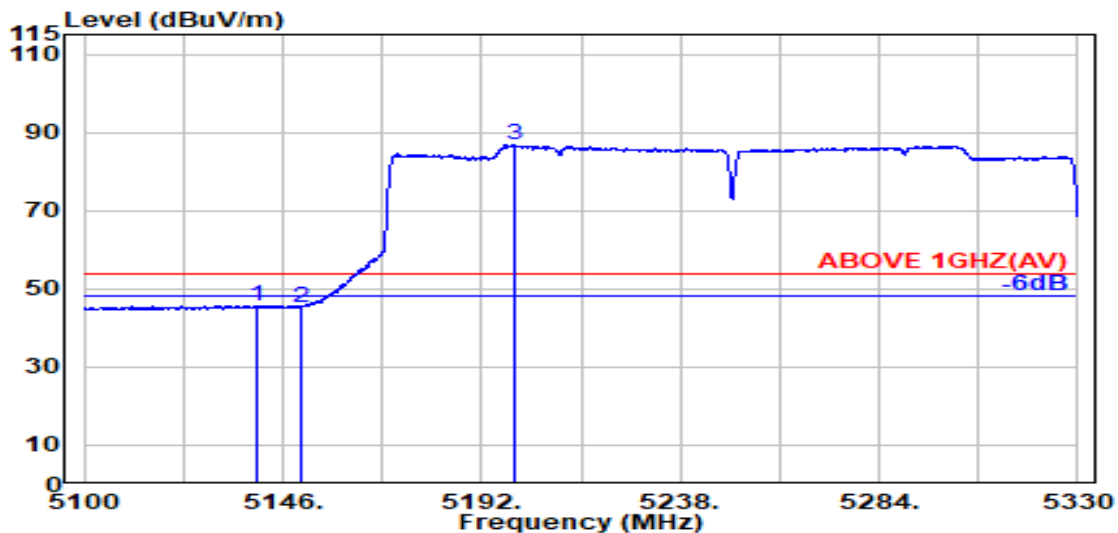


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.200	33.48	8.36	39.27	43.15	45.72	54.00	8.28	Average
5150.000	33.50	8.37	39.27	42.71	45.32	54.00	8.68	Average
@ 5199.400	33.80	8.42	39.27	83.77	86.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

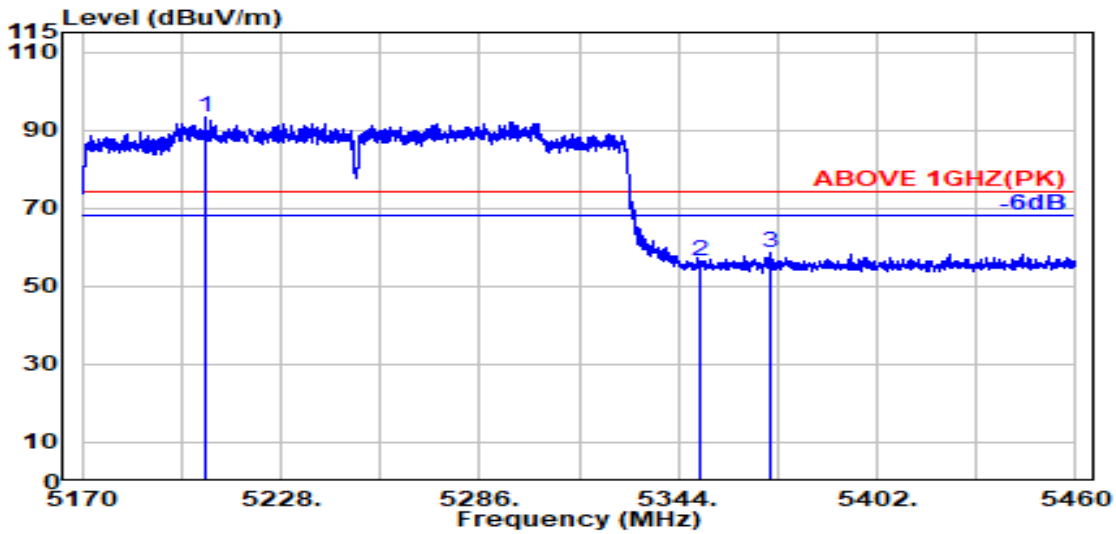

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5205.900	33.79	8.43	39.27	90.37	93.32	---	---	Peak
5350.000	33.70	8.57	39.26	53.27	56.28	74.00	17.72	Peak
5370.800	33.78	8.59	39.26	55.39	58.51	74.00	15.49	Peak

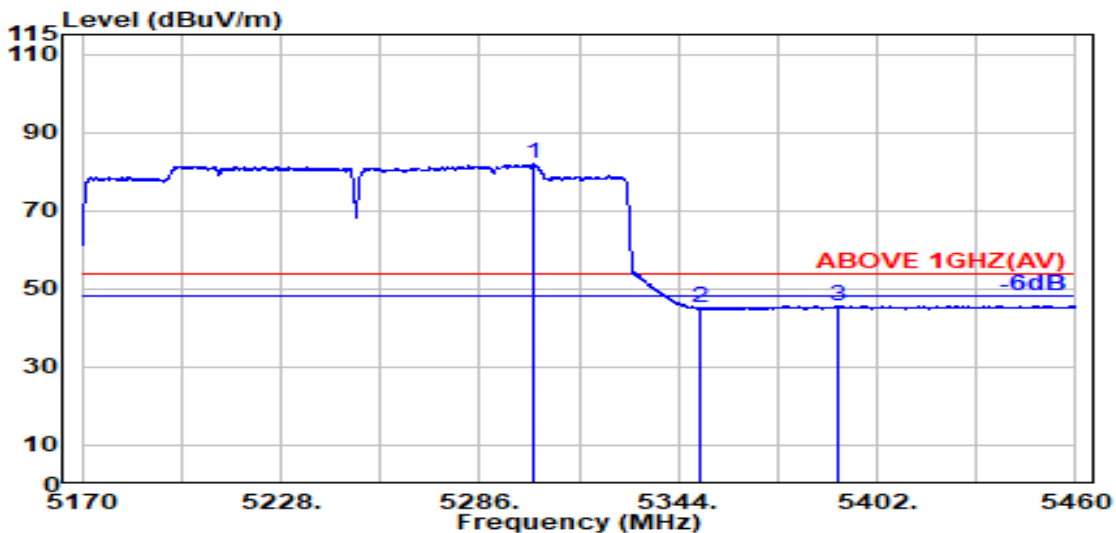


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.900	33.80	8.53	39.26	78.82	81.88	---	---	Average
5350.000	33.70	8.57	39.26	41.93	44.94	54.00	9.06	Average
5390.600	33.86	8.61	39.26	42.35	45.57	54.00	8.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

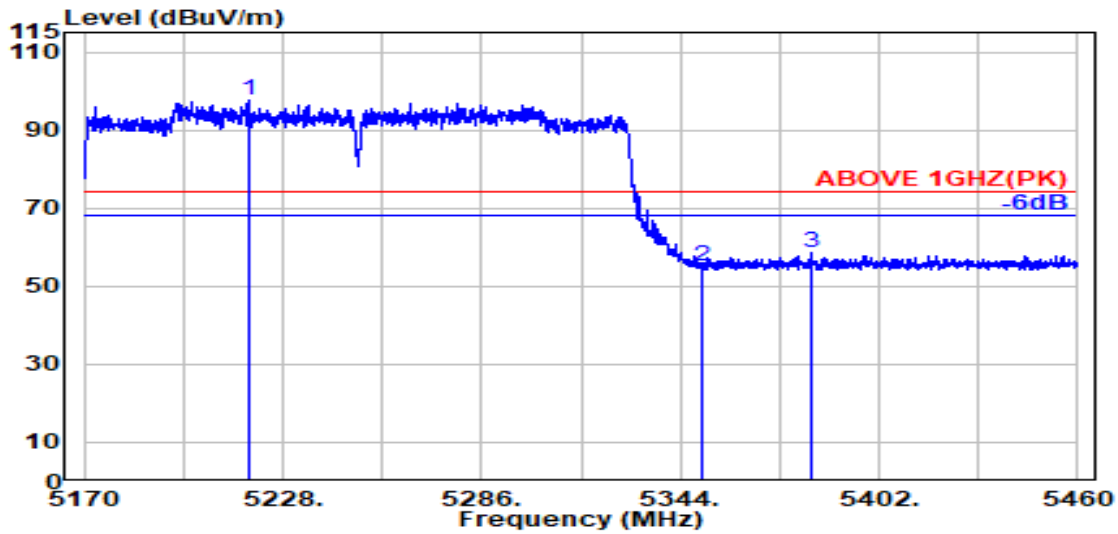

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5218.400	33.76	8.44	39.27	94.88	97.82	---	---	Peak
5350.000	33.70	8.57	39.26	52.20	55.21	74.00	18.79	Peak
5382.100	33.83	8.60	39.26	55.56	58.73	74.00	15.27	Peak

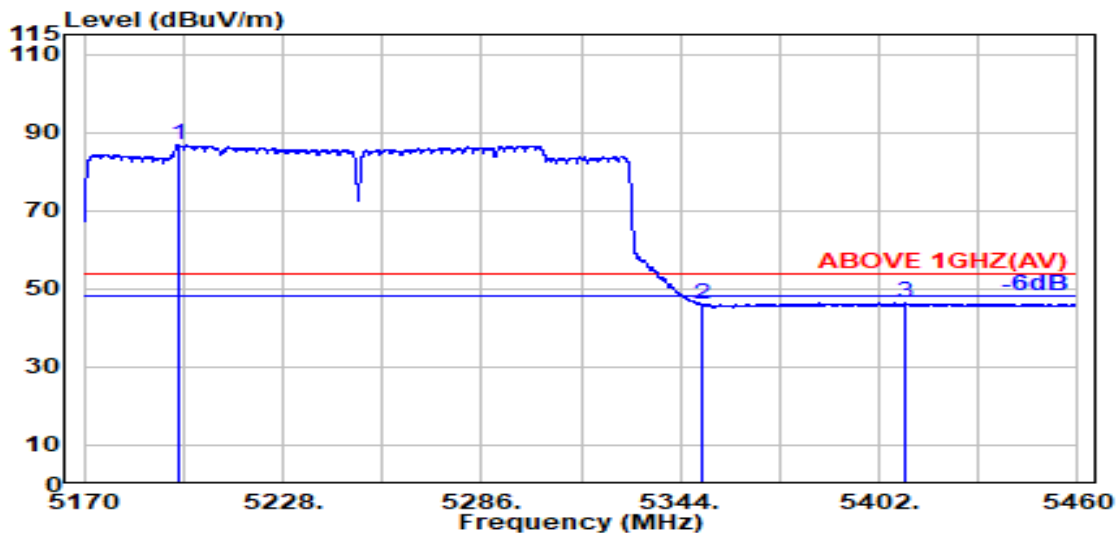


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.900	33.79	8.42	39.27	83.70	86.64	---	---	Average
5350.000	33.70	8.57	39.26	43.12	46.14	54.00	7.86	Average
5409.900	33.92	8.63	39.26	43.06	46.35	54.00	7.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

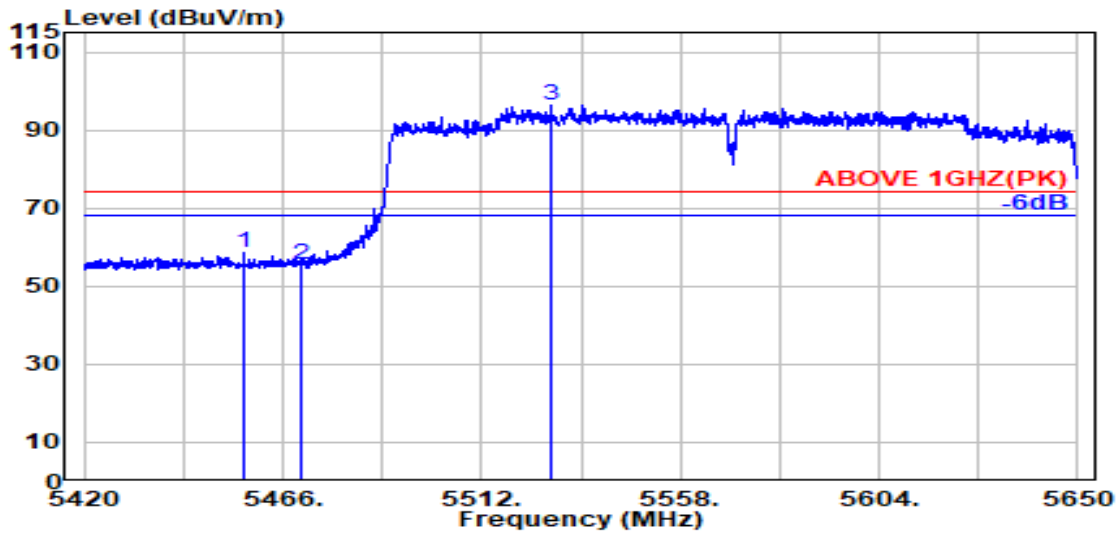

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.900	34.01	8.68	39.25	55.24	58.68	74.00	15.32	Peak
5470.000	34.04	8.69	39.25	51.89	55.37	74.00	18.63	Peak
@ 5528.200	34.04	8.74	39.26	92.81	96.34	---	---	Peak

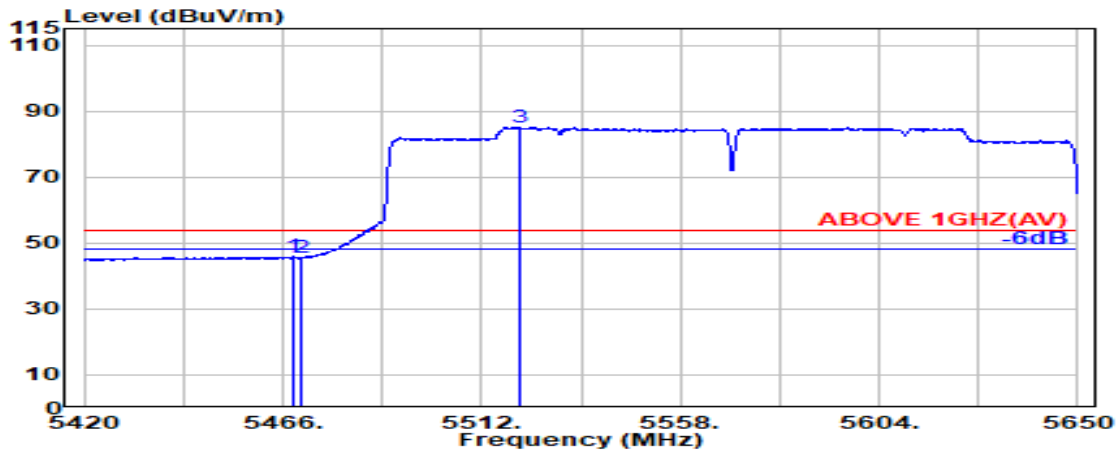


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5468.400	34.04	8.69	39.25	42.35	45.82	54.00	8.18	Average
5470.000	34.04	8.69	39.25	42.30	45.78	54.00	8.22	Average
5520.600	34.06	8.74	39.25	81.70	85.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

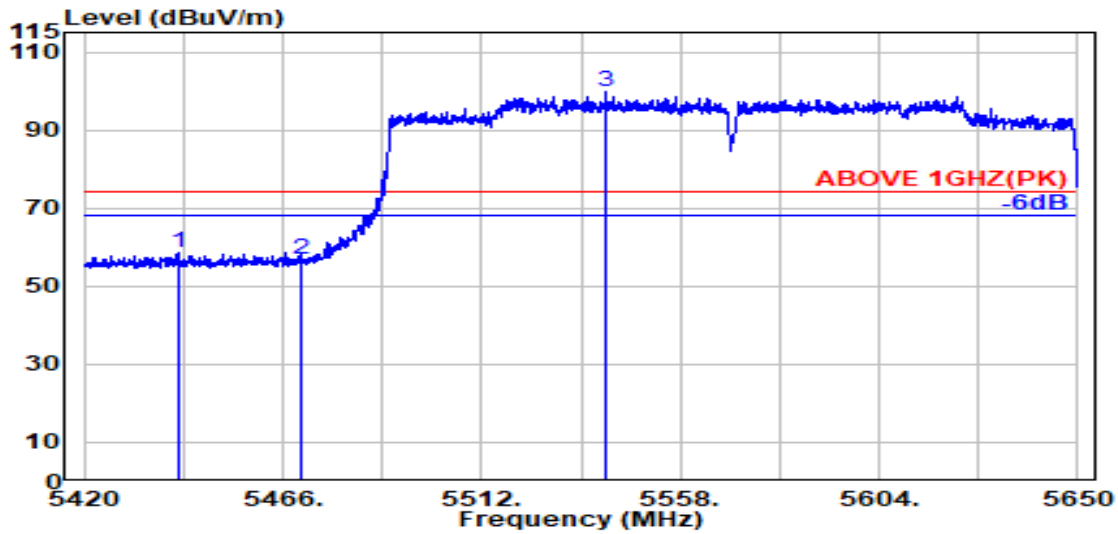

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.000	33.98	8.66	39.25	55.35	58.74	74.00	15.26	Peak
5470.000	34.04	8.69	39.25	53.40	56.88	74.00	17.12	Peak
@ 5540.900	34.02	8.76	39.26	96.42	99.94	---	---	Peak

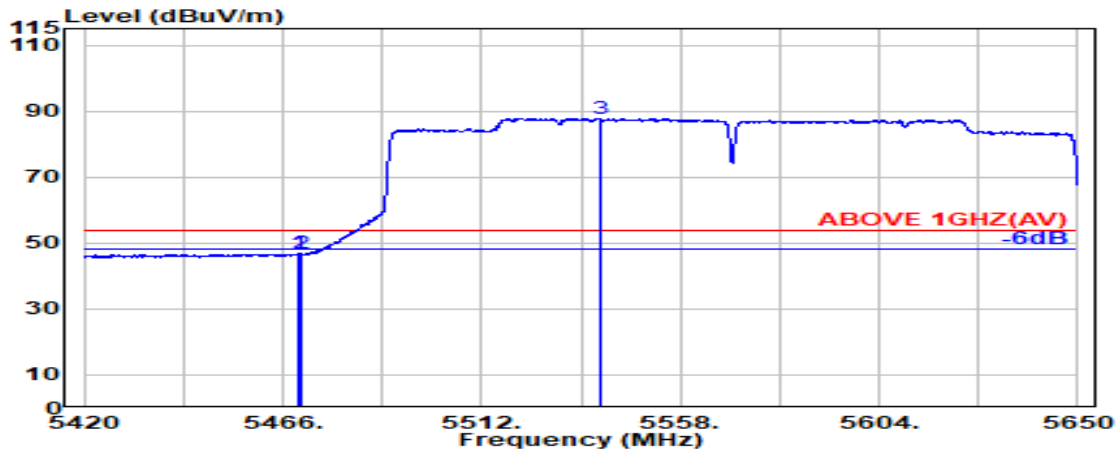


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5469.800	34.04	8.69	39.25	43.30	46.78	54.00	7.22	Average
5470.000	34.04	8.69	39.25	43.24	46.71	54.00	7.29	Average
5539.800	34.02	8.75	39.26	84.31	87.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

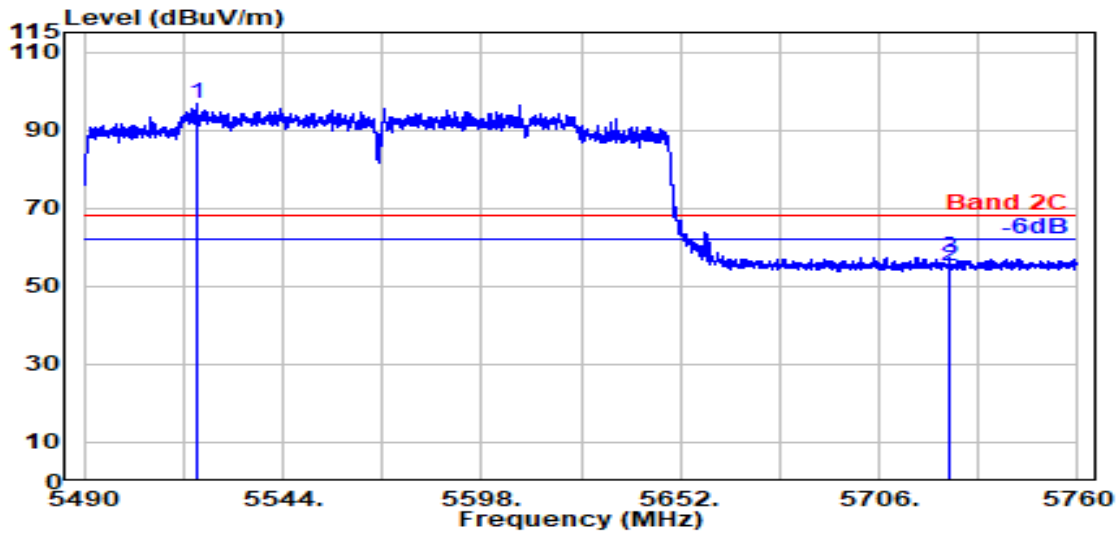

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5520.800	34.06	8.74	39.25	93.30	96.84	---	---	Peak
5725.000	33.60	8.93	39.29	52.01	55.24	68.20	12.96	Peak
5725.300	33.60	8.93	39.29	53.89	57.12	68.20	11.08	Peak

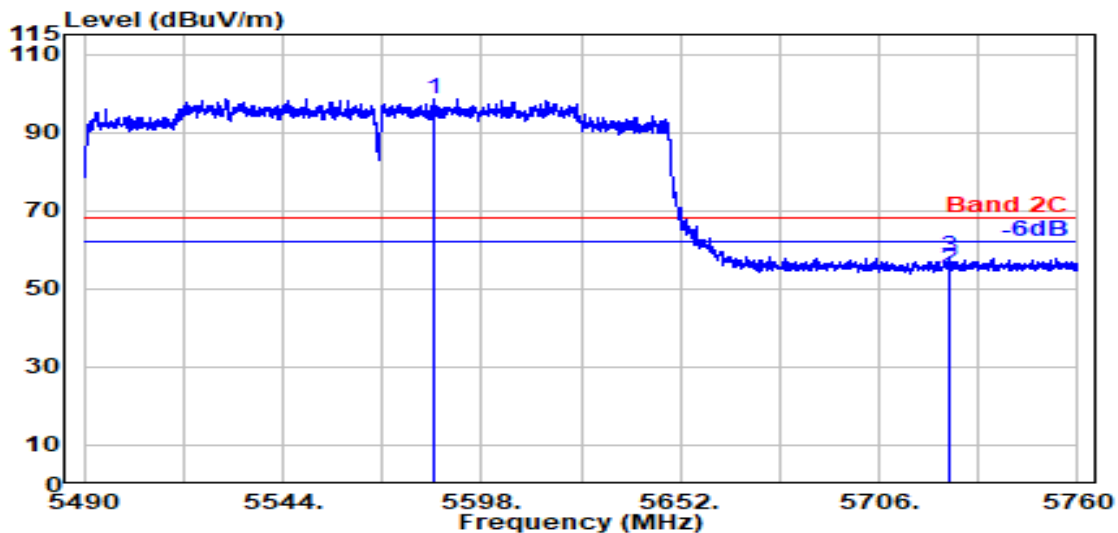


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5585.100	33.86	8.80	39.27	95.07	98.46	---	---	Peak
5725.000	33.60	8.93	39.29	51.75	54.99	68.20	13.21	Peak
5725.300	33.60	8.93	39.29	54.88	58.12	68.20	10.08	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

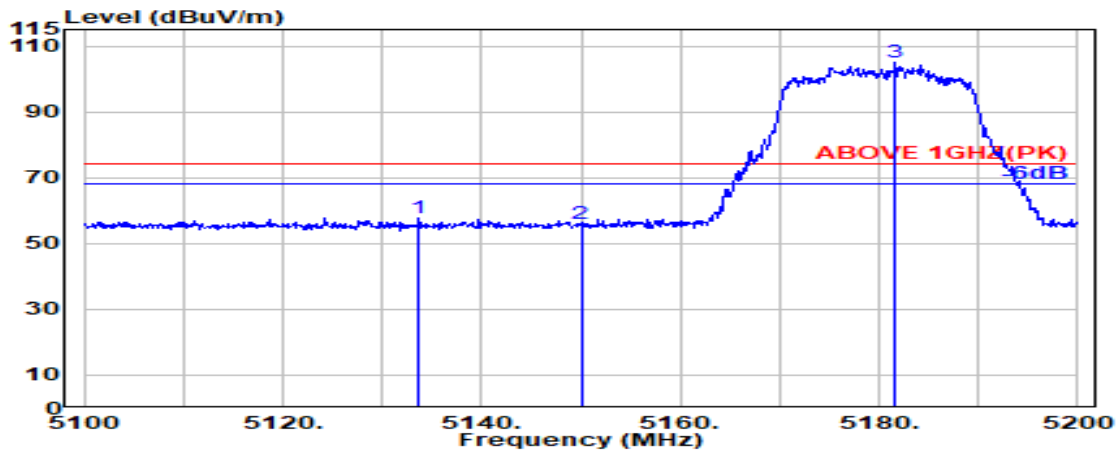

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.700	33.47	8.36	39.27	55.14	57.69	74.00	16.31	Peak
5150.000	33.50	8.37	39.27	53.42	56.03	74.00	17.97	Peak
@ 5181.600	33.69	8.41	39.27	102.33	105.15	---	---	Peak

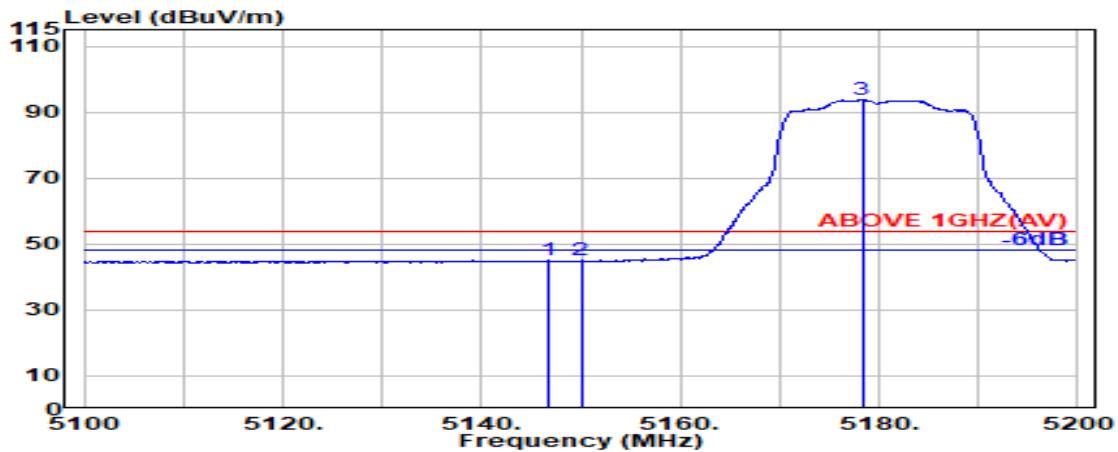


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.700	33.49	8.37	39.27	42.65	45.25	54.00	8.75	Average
5150.000	33.50	8.37	39.27	42.35	44.95	54.00	9.05	Average
@ 5178.300	33.67	8.40	39.27	90.94	93.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

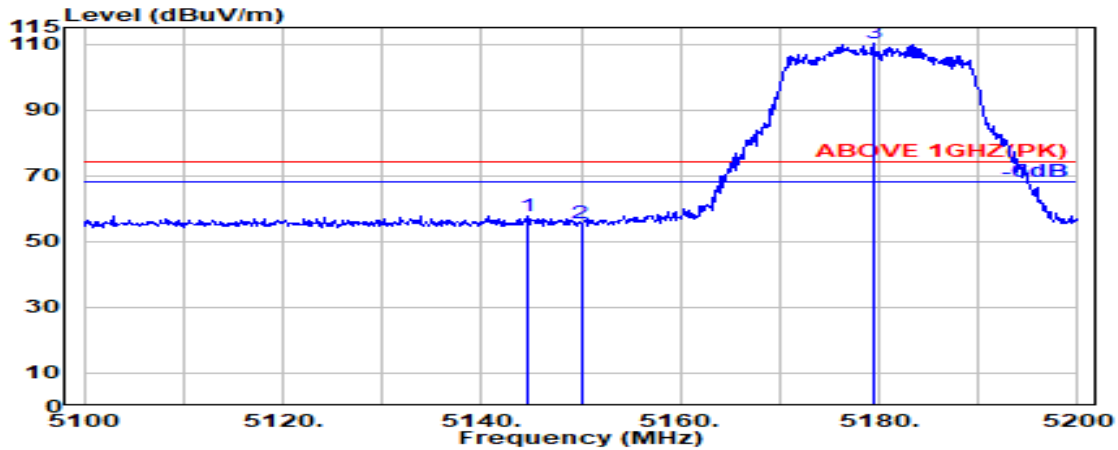

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	33.49	8.37	39.27	55.21	57.80	74.00	16.20	Peak
5150.000	33.50	8.37	39.27	52.85	55.45	74.00	18.55	Peak
@ 5179.400	33.68	8.40	39.27	107.42	110.23	---	---	Peak

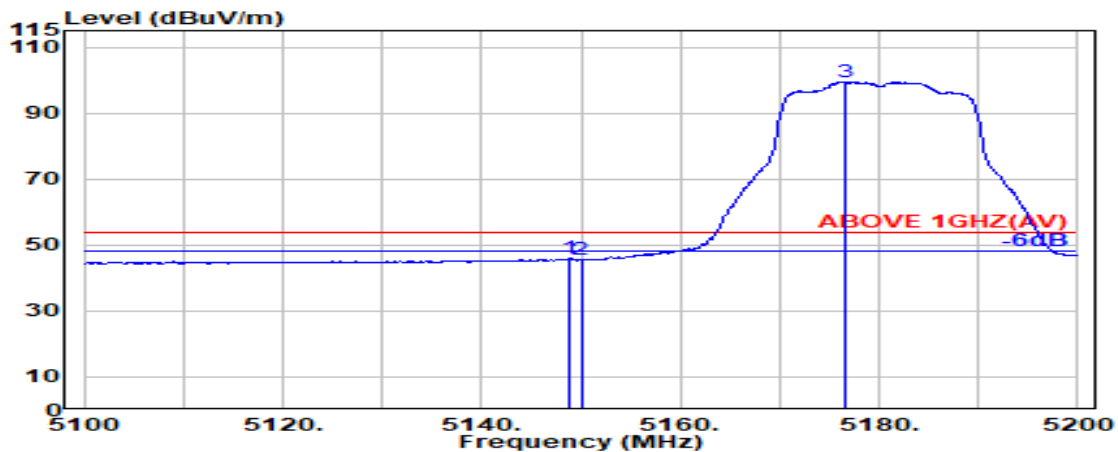


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.27	43.29	45.89	54.00	8.11	Average
5150.000	33.50	8.37	39.27	42.77	45.38	54.00	8.62	Average
@ 5176.500	33.66	8.40	39.27	96.62	99.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

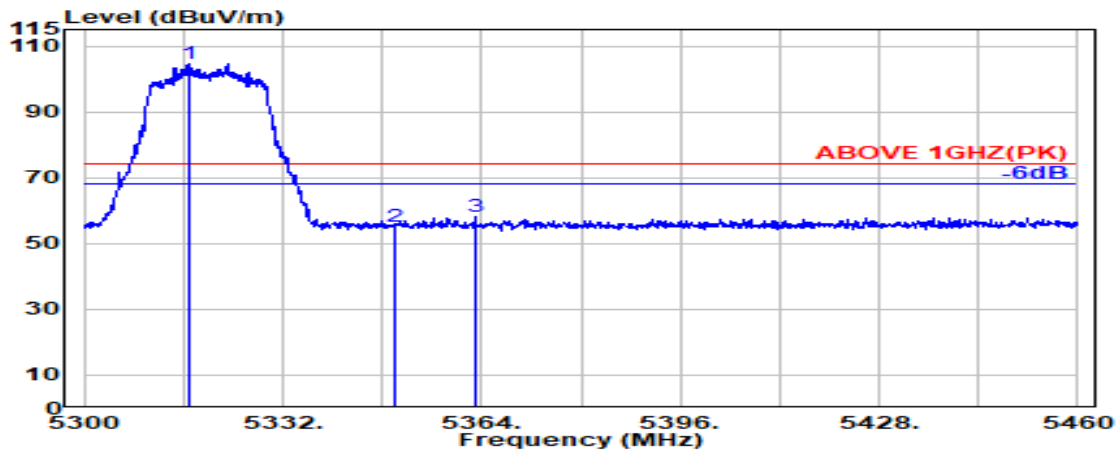

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.100	33.77	8.54	39.26	101.55	104.59	---	---	Peak
5350.000	33.70	8.57	39.26	52.30	55.32	74.00	18.68	Peak
5362.900	33.75	8.59	39.26	55.09	58.16	74.00	15.84	Peak

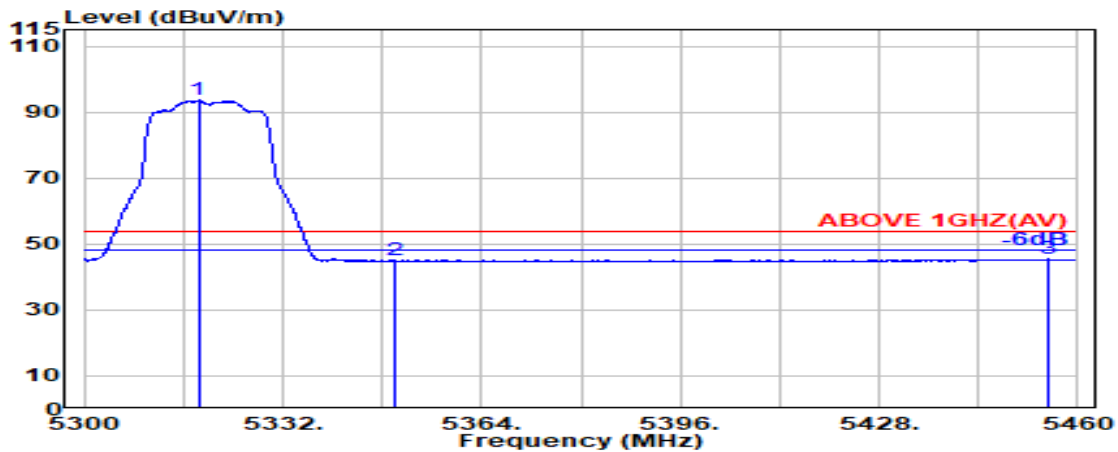


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.400	33.76	8.54	39.26	90.52	93.56	---	---	Average
5350.000	33.70	8.57	39.26	41.92	44.94	54.00	9.06	Average
5455.400	34.01	8.67	39.25	41.95	45.38	54.00	8.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

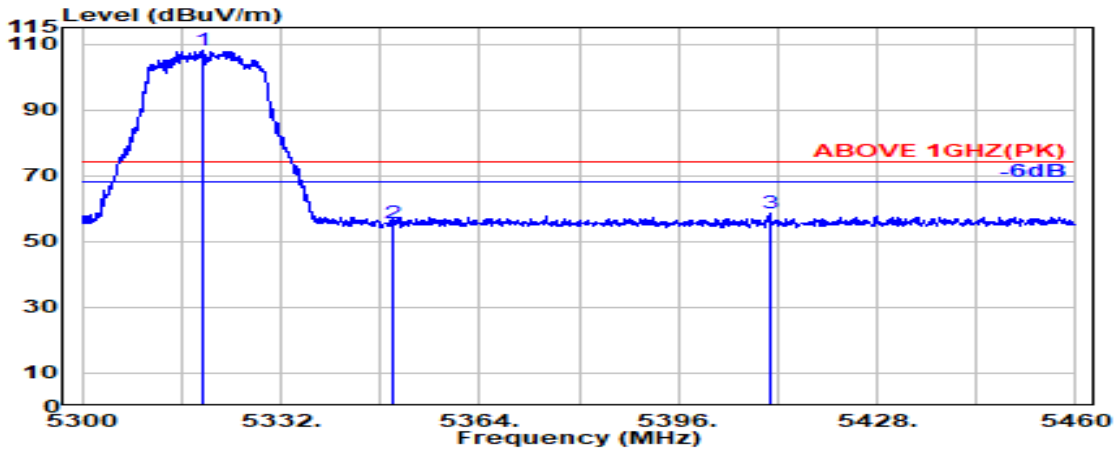

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.300	33.76	8.54	39.26	104.89	107.93	---	---	Peak
5350.000	33.70	8.57	39.26	52.60	55.62	74.00	18.38	Peak
5410.700	33.92	8.63	39.26	55.08	58.38	74.00	15.62	Peak

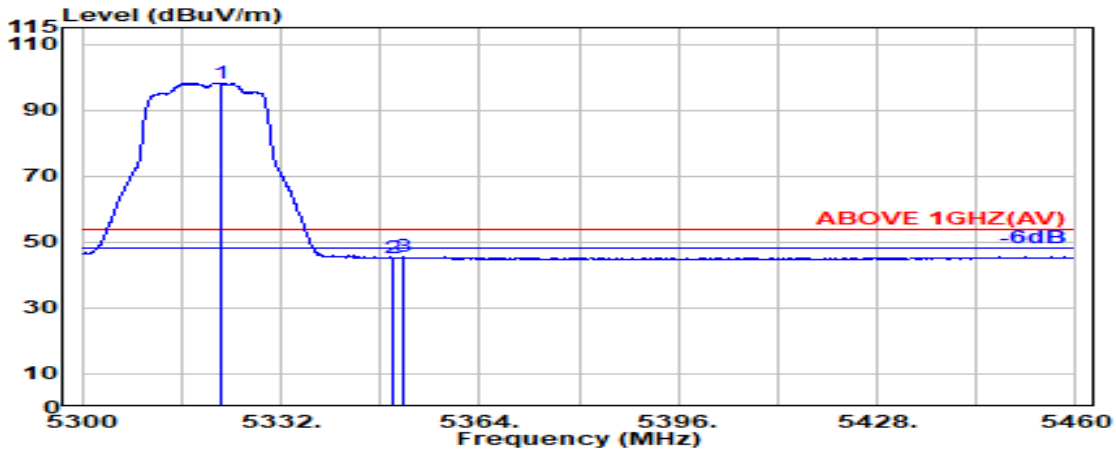


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.300	33.76	8.55	39.26	95.17	98.21	---	---	Average
5350.000	33.70	8.57	39.26	42.20	45.21	54.00	8.79	Average
5351.900	33.71	8.57	39.26	42.39	45.42	54.00	8.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

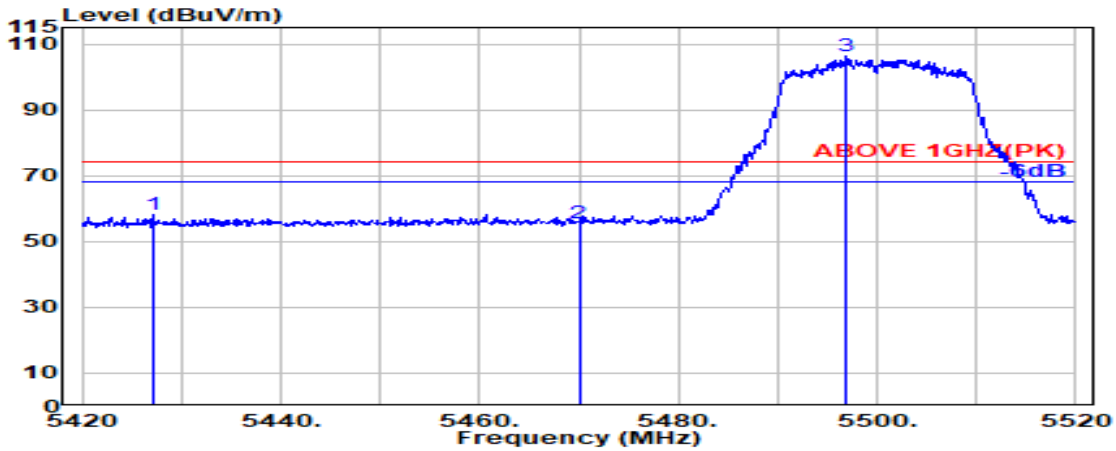

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.100	33.95	8.65	39.25	54.84	58.19	74.00	15.81	Peak
5470.000	34.04	8.69	39.25	52.14	55.62	74.00	18.38	Peak
@ 5496.900	34.09	8.71	39.25	102.77	106.33	---	---	Peak

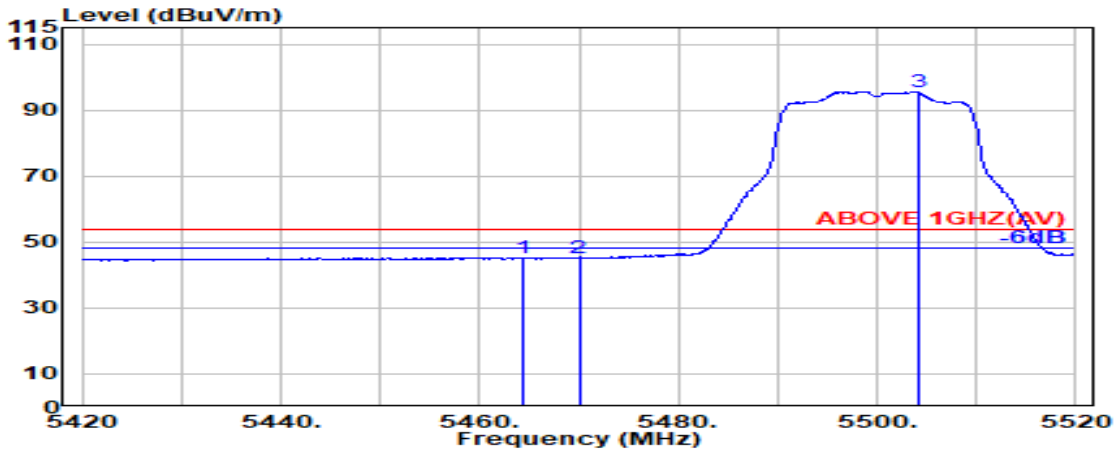


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.03	8.68	39.25	41.86	45.32	54.00	8.68	Average
5470.000	34.04	8.69	39.25	41.58	45.06	54.00	8.94	Average
@ 5504.100	34.09	8.72	39.25	92.04	95.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

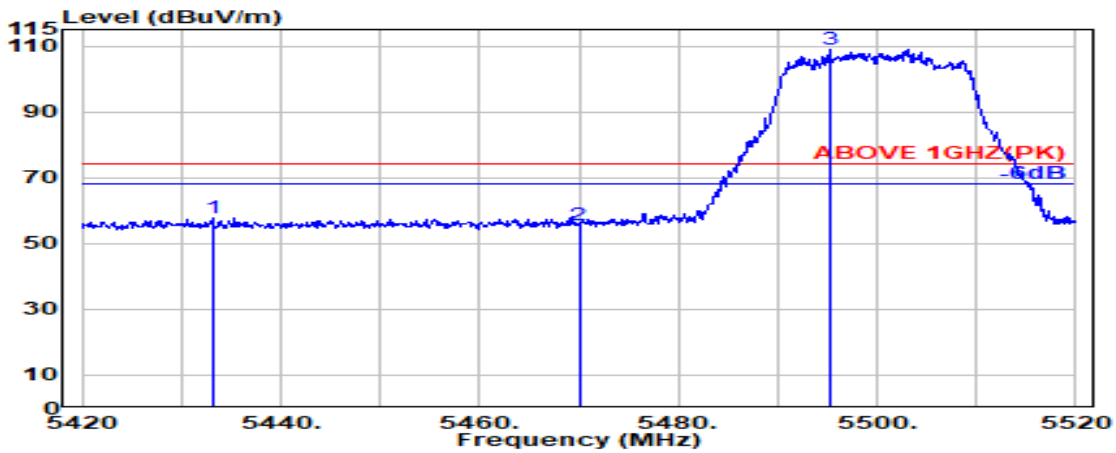

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.100	33.97	8.65	39.25	54.52	57.89	74.00	16.11	Peak
5470.000	34.04	8.69	39.25	51.87	55.35	74.00	18.65	Peak
@ 5495.300	34.09	8.71	39.25	105.39	108.94	---	---	Peak

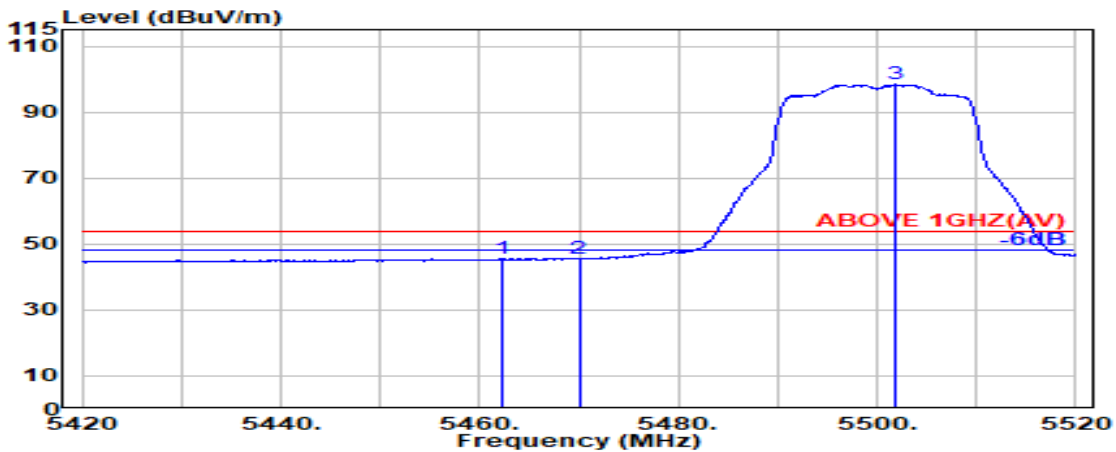


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.02	8.68	39.25	42.31	45.76	54.00	8.24	Average
5470.000	34.04	8.69	39.25	41.98	45.45	54.00	8.55	Average
@ 5501.900	34.10	8.72	39.25	94.76	98.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

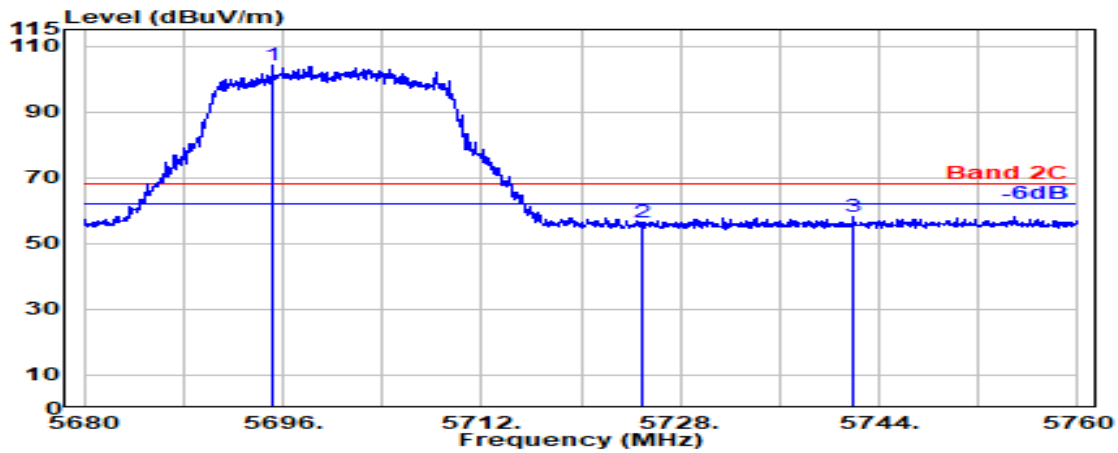

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.200	33.62	8.90	39.29	100.72	103.95	---	---	Peak
5725.000	33.60	8.93	39.29	53.39	56.62	68.20	11.58	Peak
5741.950	33.60	8.94	39.29	55.10	58.35	68.20	9.85	Peak

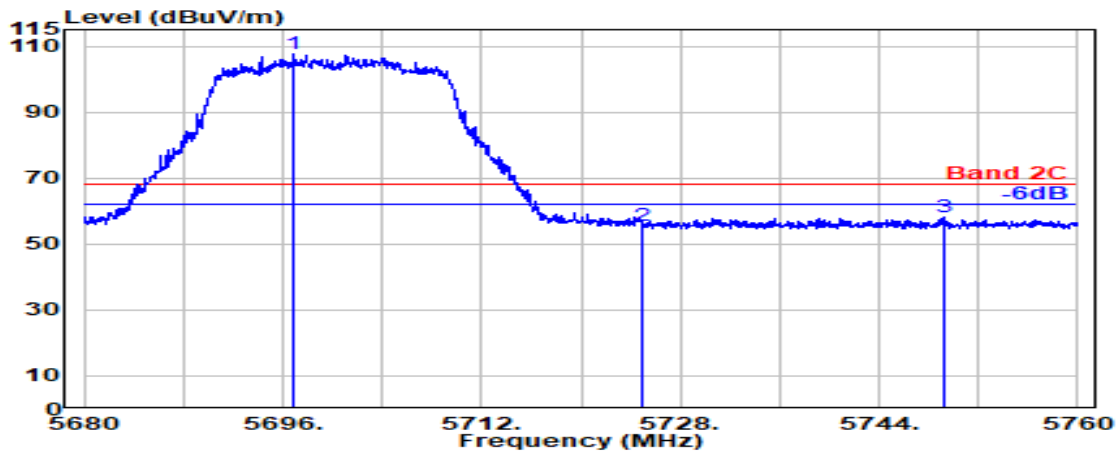


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.850	33.61	8.90	39.29	104.27	107.50	---	---	Peak
5725.000	33.60	8.93	39.29	52.18	55.42	68.20	12.78	Peak
5749.250	33.60	8.95	39.30	54.72	57.97	68.20	10.23	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

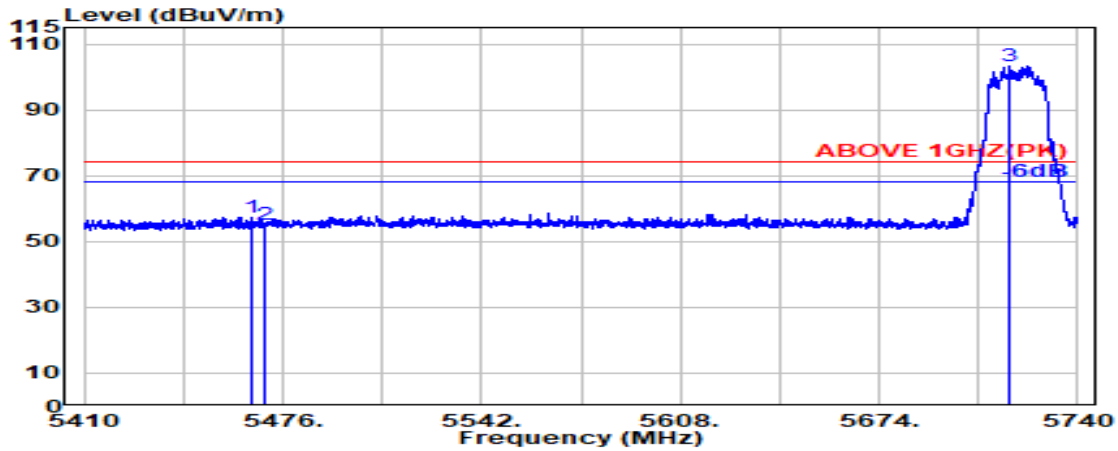

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.03	8.68	39.25	53.91	57.38	74.00	16.62	Peak
5470.000	34.04	8.69	39.25	51.82	55.30	74.00	18.70	Peak
@ 5716.900	33.60	8.92	39.29	100.27	103.50	---	---	Peak

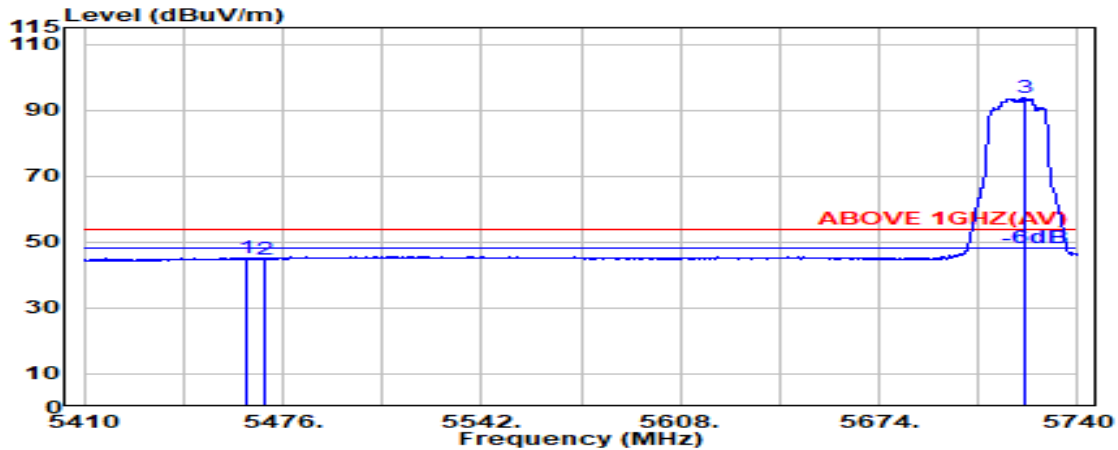


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.03	8.68	39.25	41.72	45.18	54.00	8.82	Average
5470.000	34.04	8.69	39.25	41.44	44.91	54.00	9.09	Average
@ 5722.300	33.60	8.92	39.29	90.58	93.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

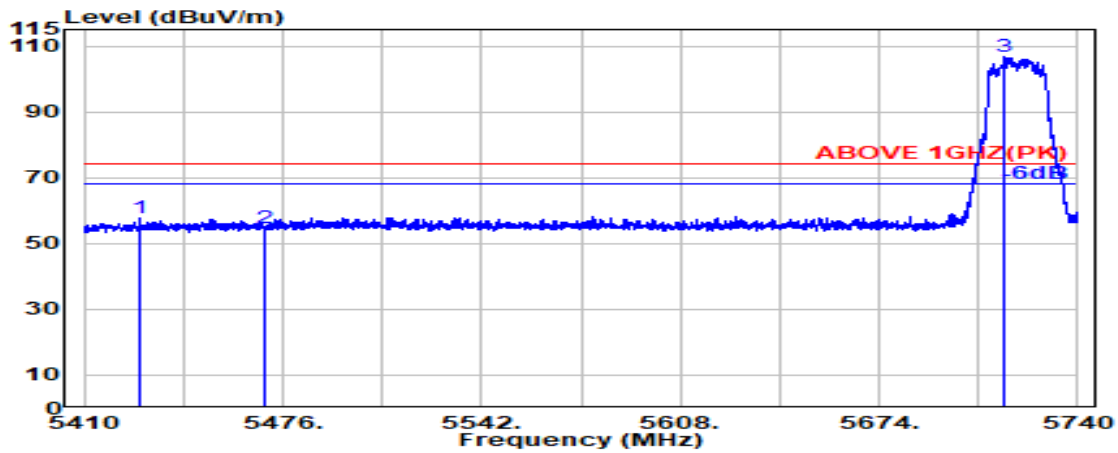

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.600	33.96	8.65	39.25	54.53	57.88	74.00	16.12	Peak
5470.000	34.04	8.69	39.25	51.29	54.76	74.00	19.24	Peak
@ 5715.600	33.60	8.92	39.29	103.66	106.88	---	---	Peak

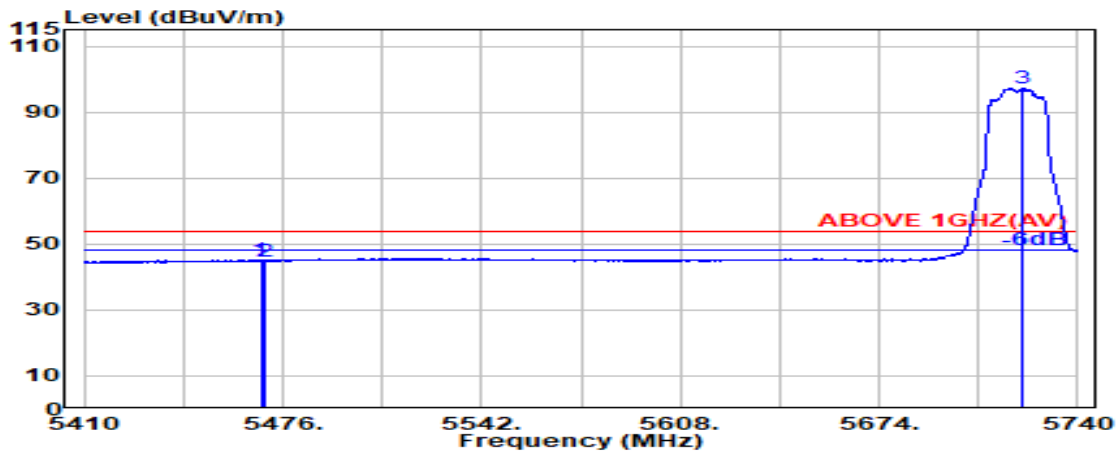


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.25	41.55	45.02	54.00	8.98	Average
5470.000	34.04	8.69	39.25	41.42	44.90	54.00	9.10	Average
@ 5721.900	33.60	8.92	39.29	93.87	97.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

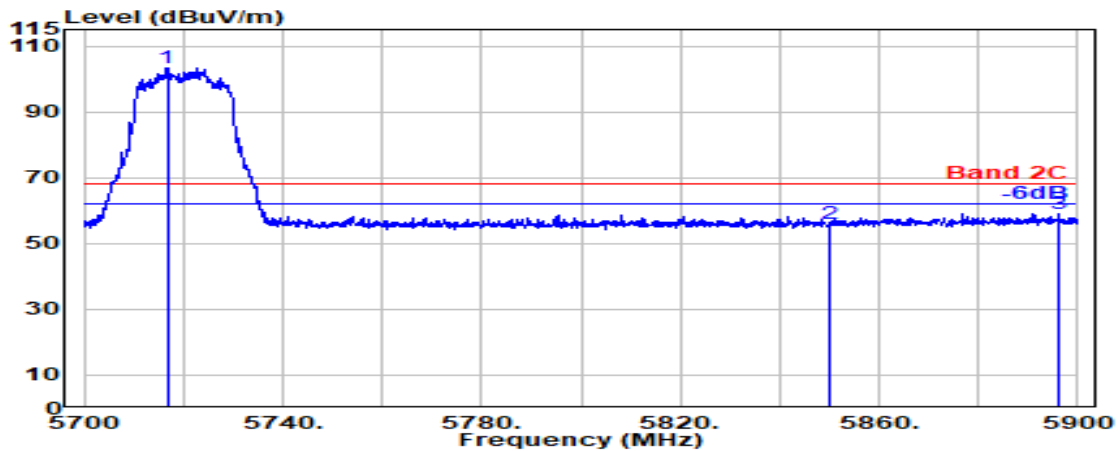

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.700	33.60	8.92	39.29	100.24	103.47	---	---	Peak
5850.000	33.90	9.04	39.31	52.53	56.15	68.20	12.05	Peak
5896.200	34.08	9.08	39.32	55.39	59.24	68.20	8.96	Peak

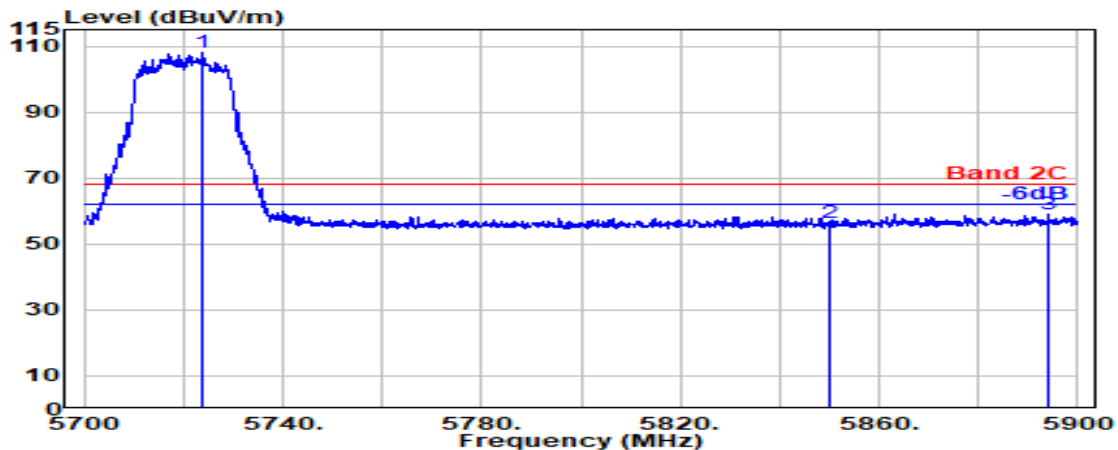


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.900	33.60	8.92	39.29	104.81	108.04	---	---	Peak
5850.000	33.90	9.04	39.31	52.86	56.48	68.20	11.72	Peak
5893.900	34.08	9.08	39.32	55.24	59.07	68.20	9.13	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

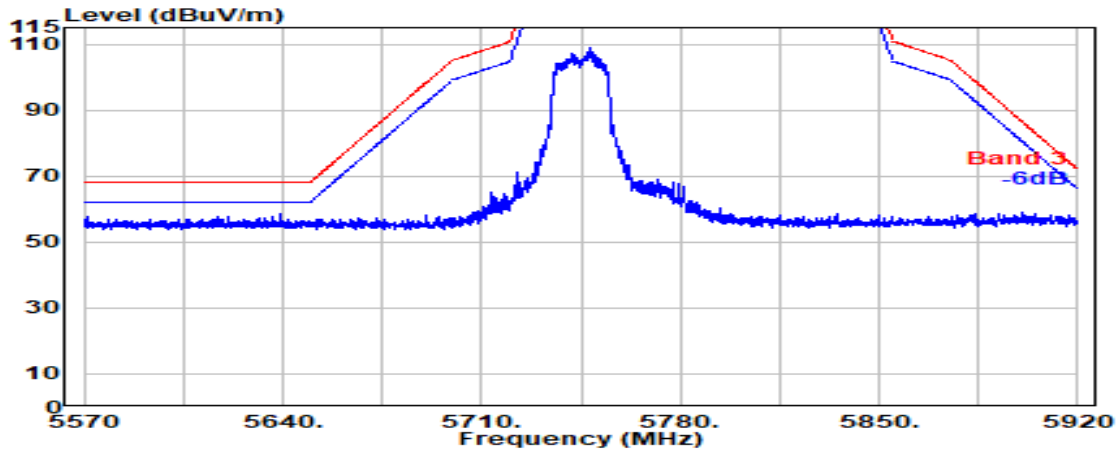


Antenna at Vertical Polarization

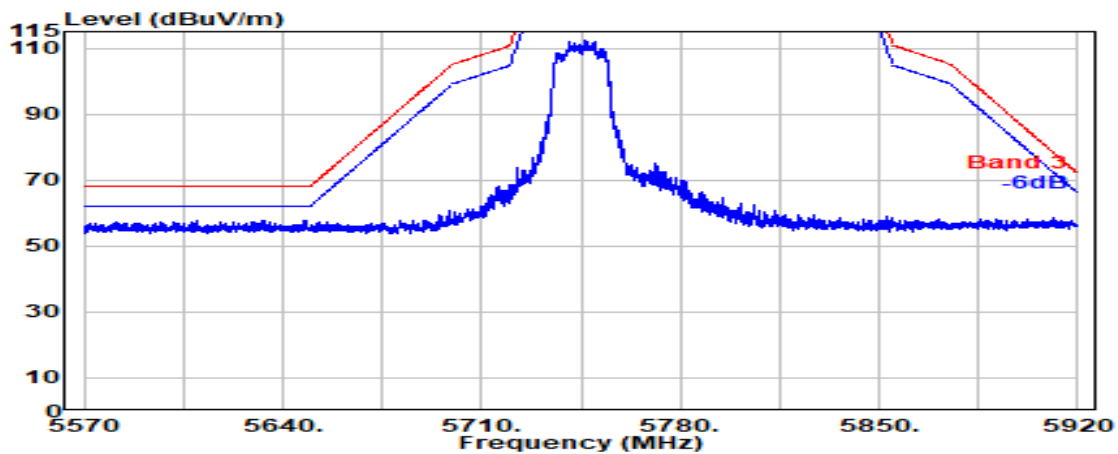


Mode	802.11be-EHT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

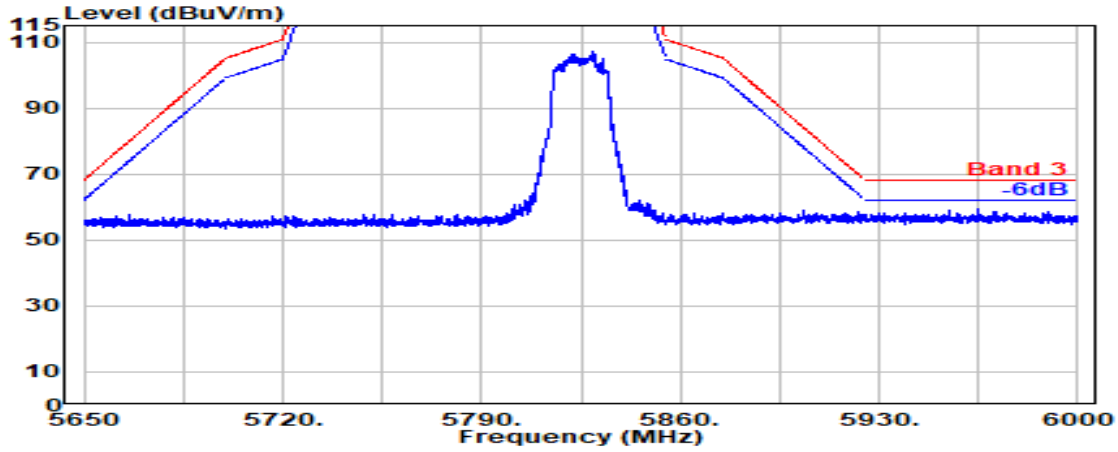

Antenna at Vertical Polarization

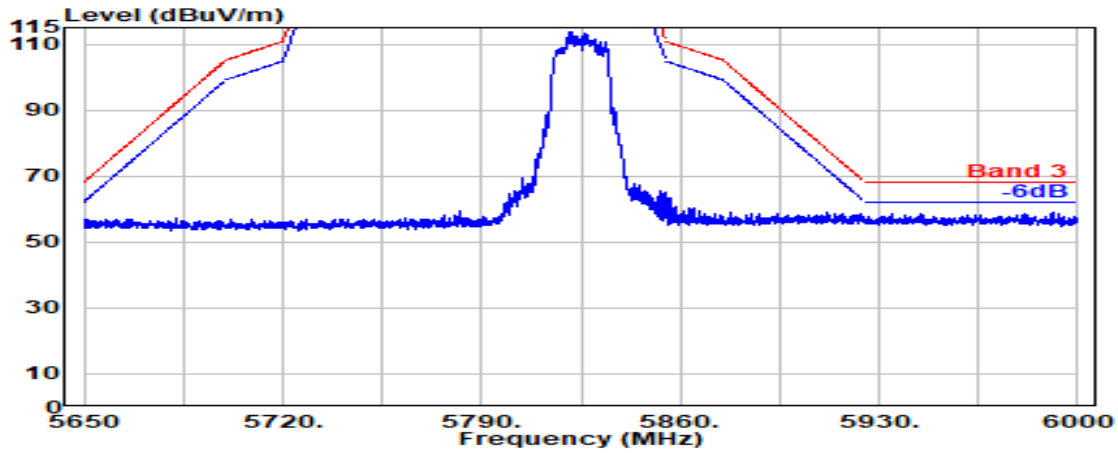


Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

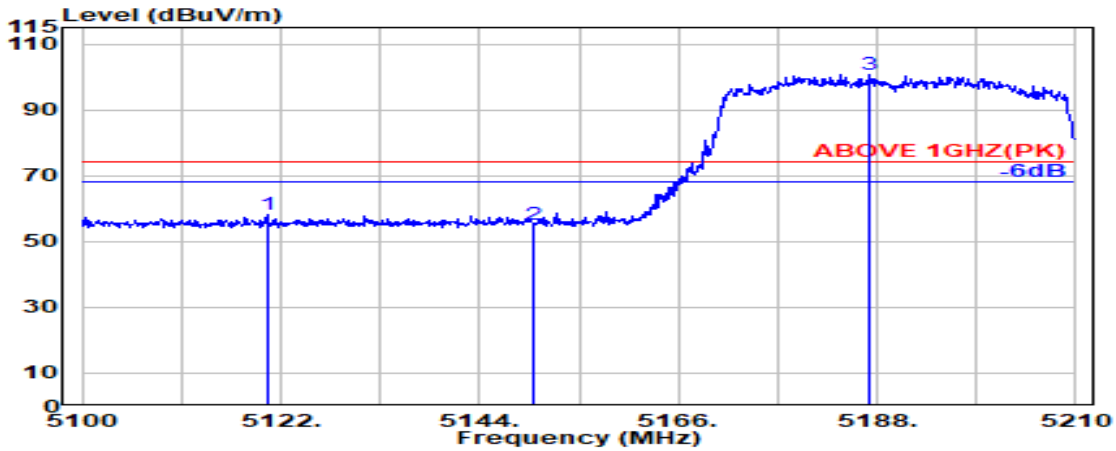

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.500	33.44	8.34	39.27	55.46	57.98	74.00	16.02	Peak
5150.000	33.50	8.37	39.27	52.52	55.12	74.00	18.88	Peak
@ 5187.000	33.72	8.41	39.27	97.87	100.74	---	---	Peak

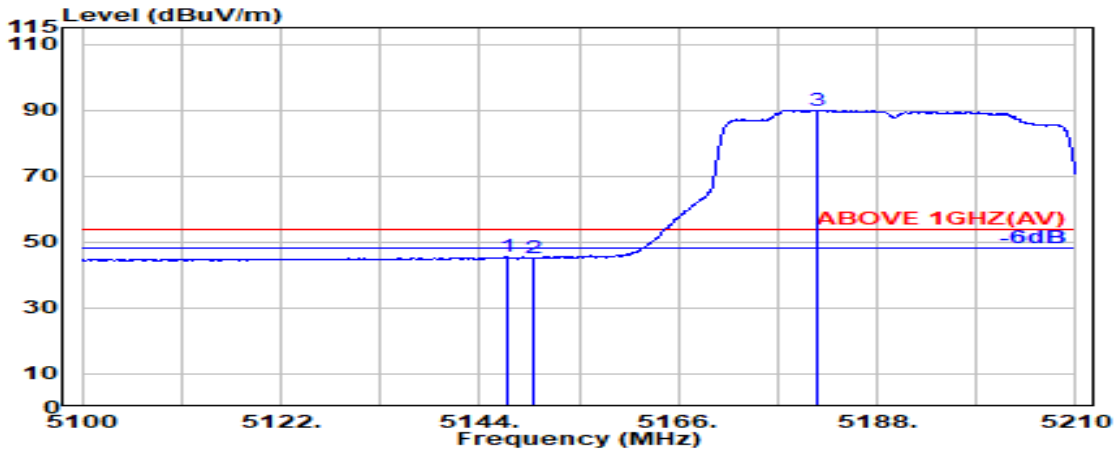


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.49	8.37	39.27	42.87	45.47	54.00	8.53	Average
5150.000	33.50	8.37	39.27	42.57	45.17	54.00	8.83	Average
@ 5181.400	33.69	8.41	39.27	87.10	89.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

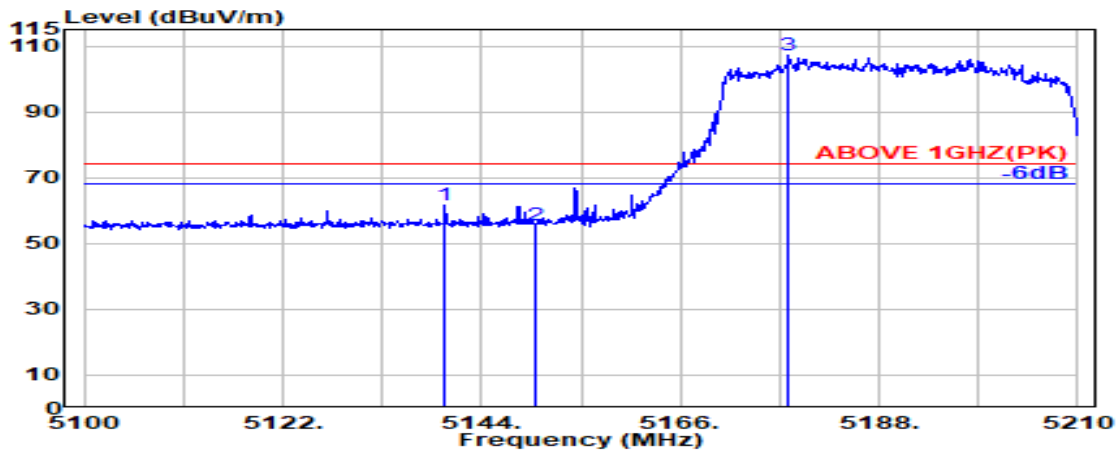

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.000	33.48	8.36	39.27	59.26	61.84	74.00	12.16	Peak
5150.000	33.50	8.37	39.27	52.88	55.48	74.00	18.52	Peak
@ 5178.000	33.67	8.40	39.27	104.50	107.30	---	---	Peak

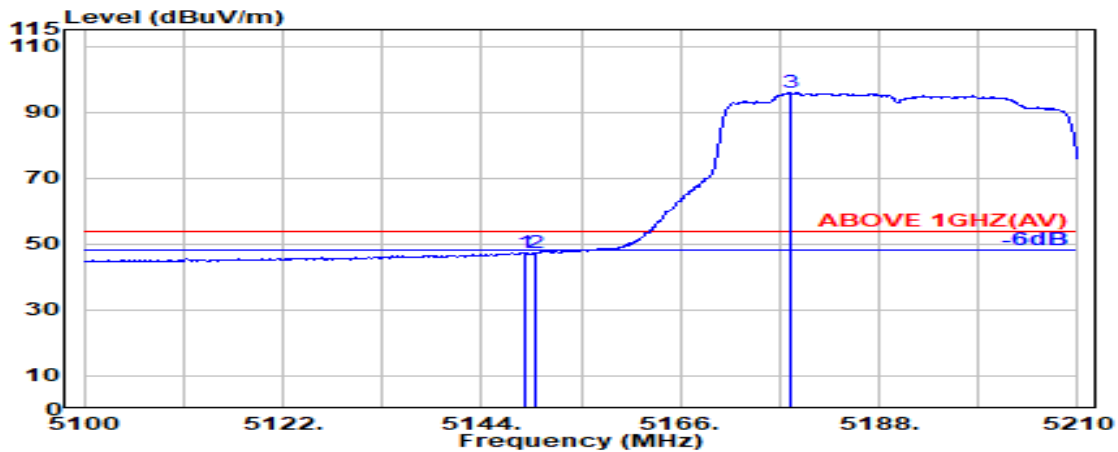


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.50	8.37	39.27	44.72	47.32	54.00	6.68	Average
5150.000	33.50	8.37	39.27	44.85	47.45	54.00	6.55	Average
@ 5178.100	33.67	8.40	39.27	93.07	95.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

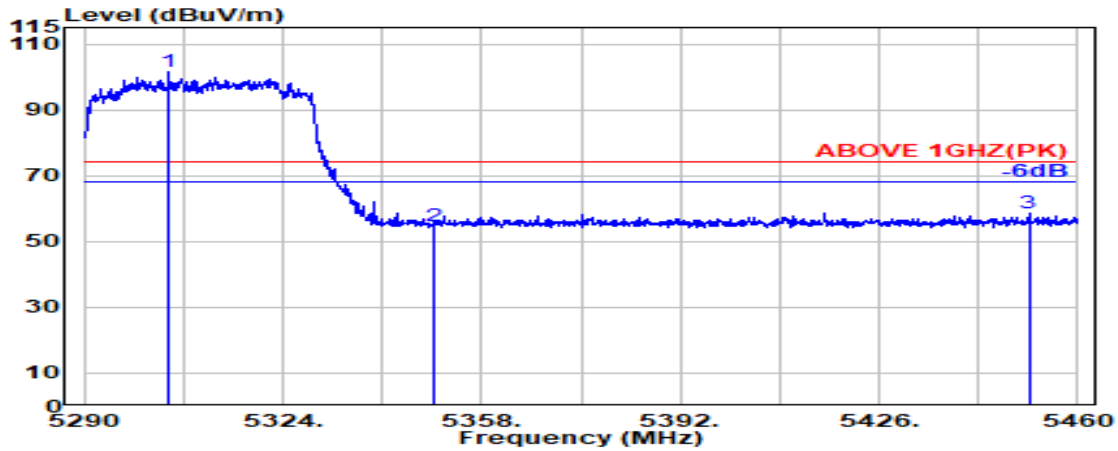

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.300	33.79	8.53	39.26	98.41	101.47	---	---	Peak
5350.000	33.70	8.57	39.26	51.54	54.56	74.00	19.44	Peak
5451.600	34.00	8.67	39.25	55.04	58.46	74.00	15.54	Peak

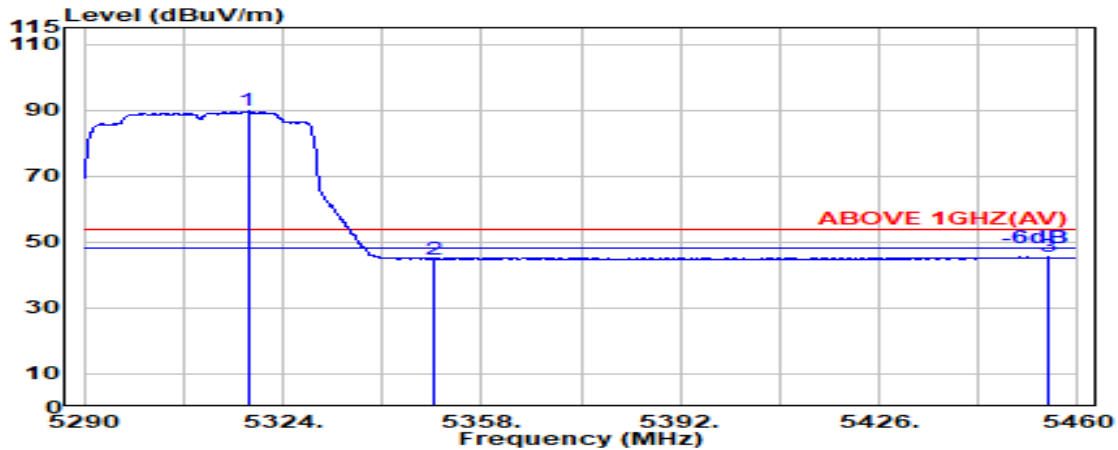


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.000	33.76	8.54	39.26	86.76	89.81	---	---	Average
5350.000	33.70	8.57	39.26	41.83	44.84	54.00	9.16	Average
5454.900	34.01	8.67	39.25	42.02	45.45	54.00	8.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

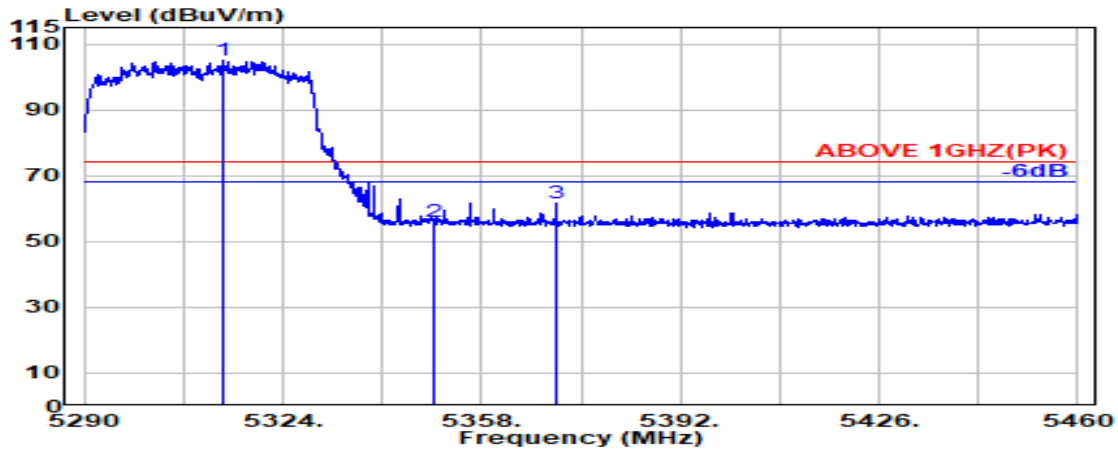

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.700	33.77	8.54	39.26	101.77	104.82	---	---	Peak
5350.000	33.70	8.57	39.26	52.83	55.84	74.00	18.16	Peak
5370.700	33.78	8.59	39.26	58.63	61.74	74.00	12.26	Peak

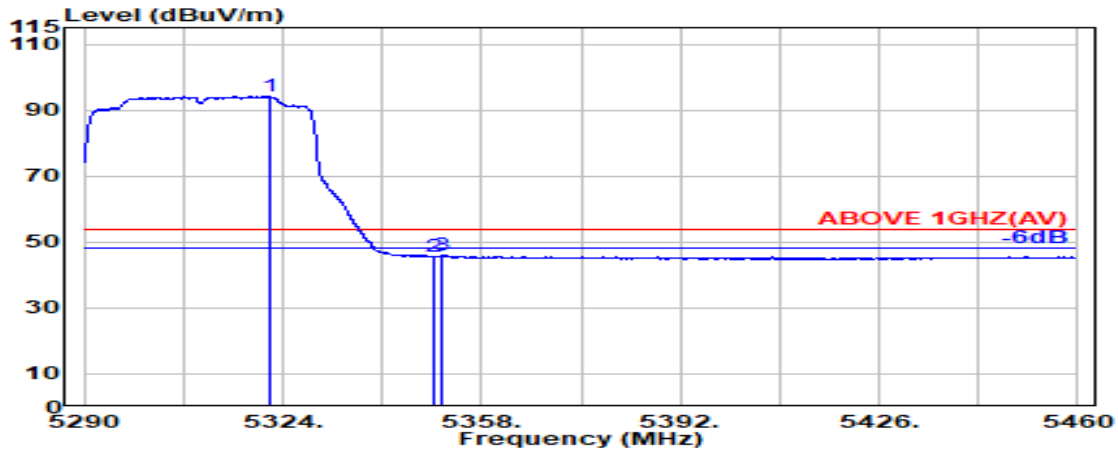


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	33.76	8.54	39.26	91.28	94.32	---	---	Average
5350.000	33.70	8.57	39.26	42.58	45.60	54.00	8.40	Average
5351.300	33.71	8.57	39.26	42.90	45.92	54.00	8.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

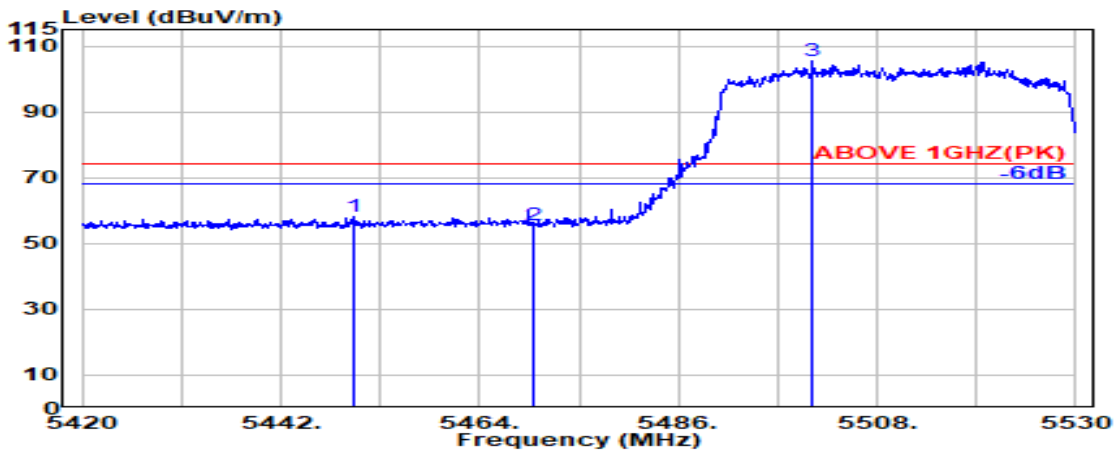

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.000	34.00	8.67	39.25	54.59	58.00	74.00	16.00	Peak
5470.000	34.04	8.69	39.25	52.24	55.71	74.00	18.29	Peak
@ 5500.900	34.10	8.72	39.25	102.05	105.62	---	---	Peak

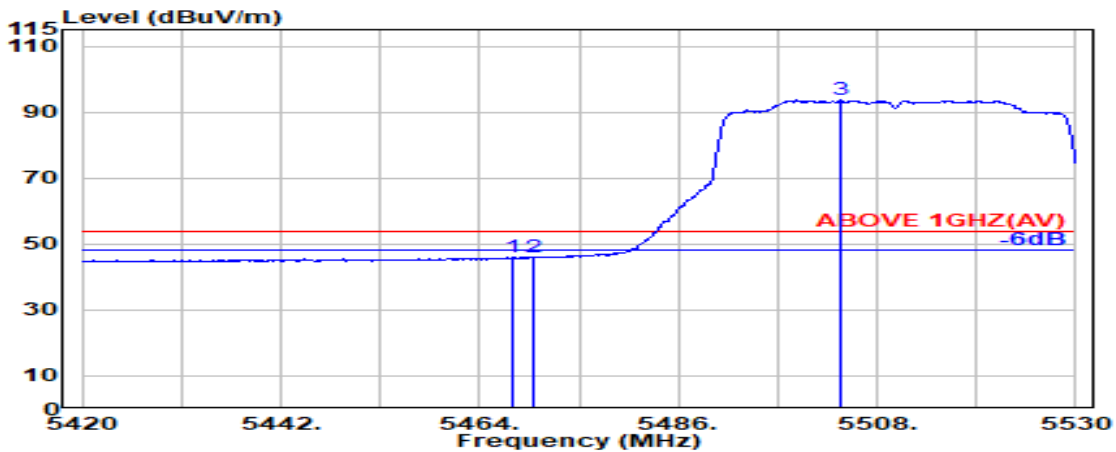


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.25	42.49	45.96	54.00	8.04	Average
5470.000	34.04	8.69	39.25	42.49	45.97	54.00	8.03	Average
@ 5504.000	34.09	8.72	39.25	90.01	93.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

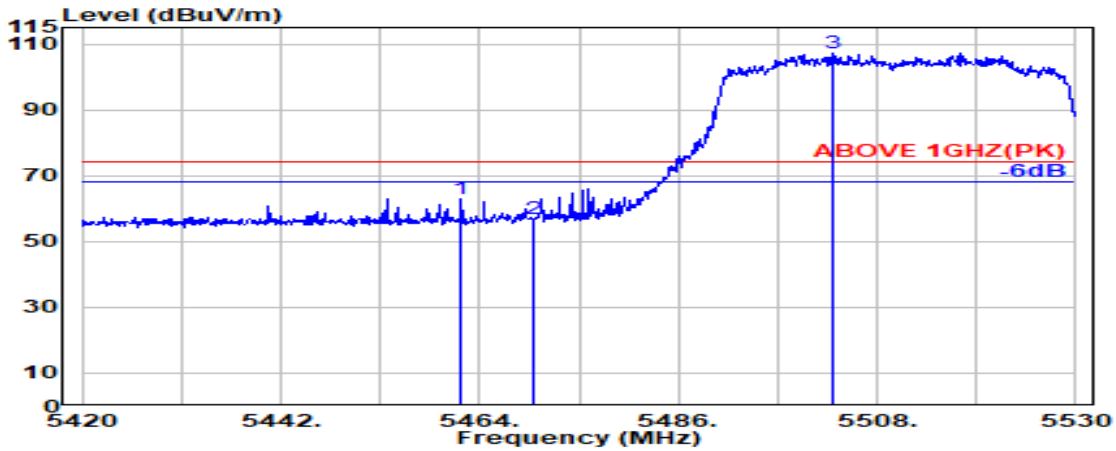

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.02	8.68	39.25	59.52	62.97	74.00	11.03	Peak
5470.000	34.04	8.69	39.25	53.38	56.86	74.00	17.14	Peak
@ 5503.000	34.09	8.72	39.25	103.54	107.11	---	---	Peak

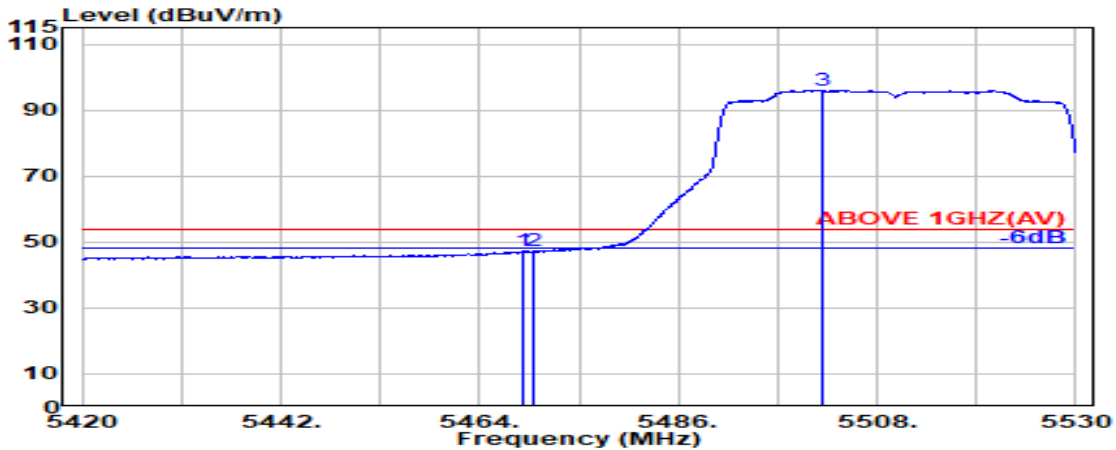


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.25	43.76	47.24	54.00	6.76	Average
5470.000	34.04	8.69	39.25	43.77	47.25	54.00	6.75	Average
@ 5502.000	34.10	8.72	39.25	92.42	95.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

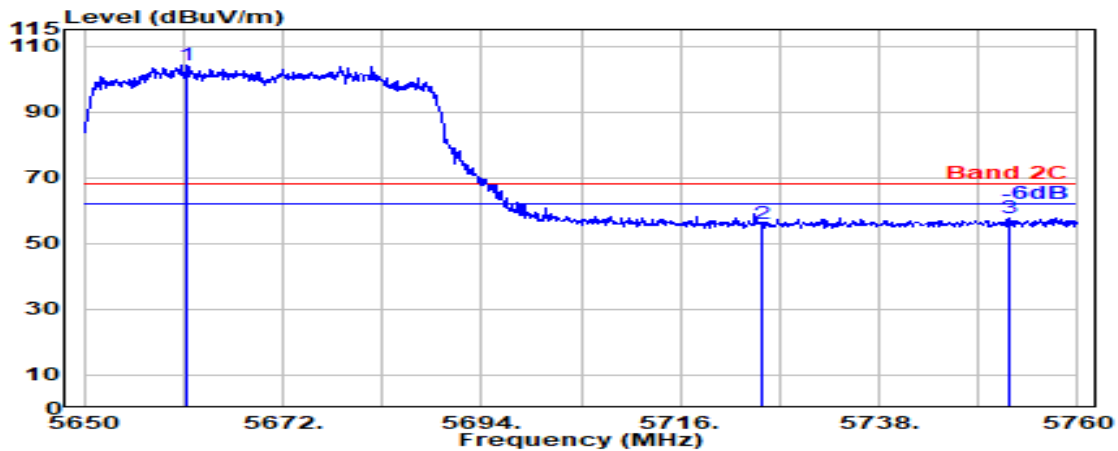

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.400	33.75	8.87	39.28	100.68	104.02	---	---	Peak
5725.000	33.60	8.93	39.29	52.86	56.10	68.20	12.10	Peak
5752.300	33.61	8.95	39.30	54.65	57.92	68.20	10.28	Peak

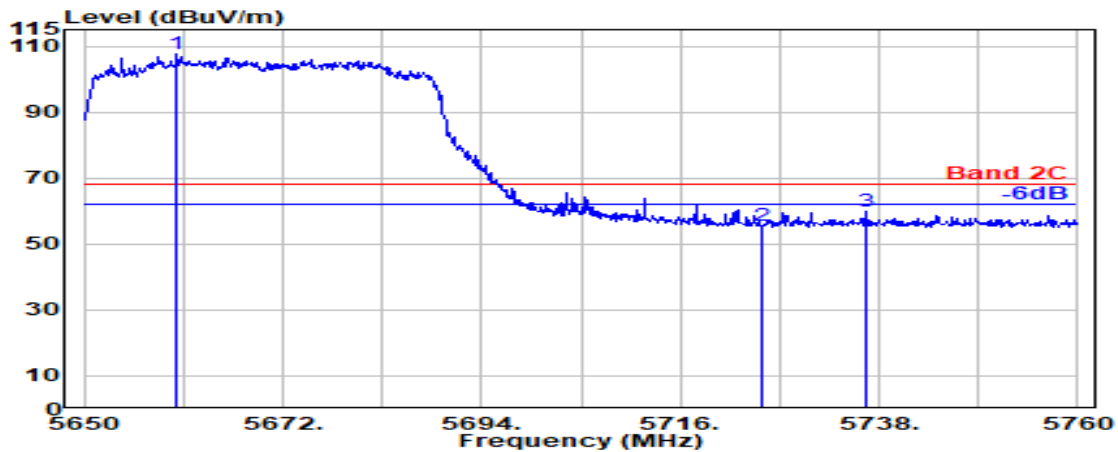


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5660.300	33.76	8.87	39.28	104.18	107.52	---	---	Peak
5725.000	33.60	8.93	39.29	52.20	55.43	68.20	12.77	Peak
5736.500	33.60	8.94	39.29	56.43	59.67	68.20	8.53	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

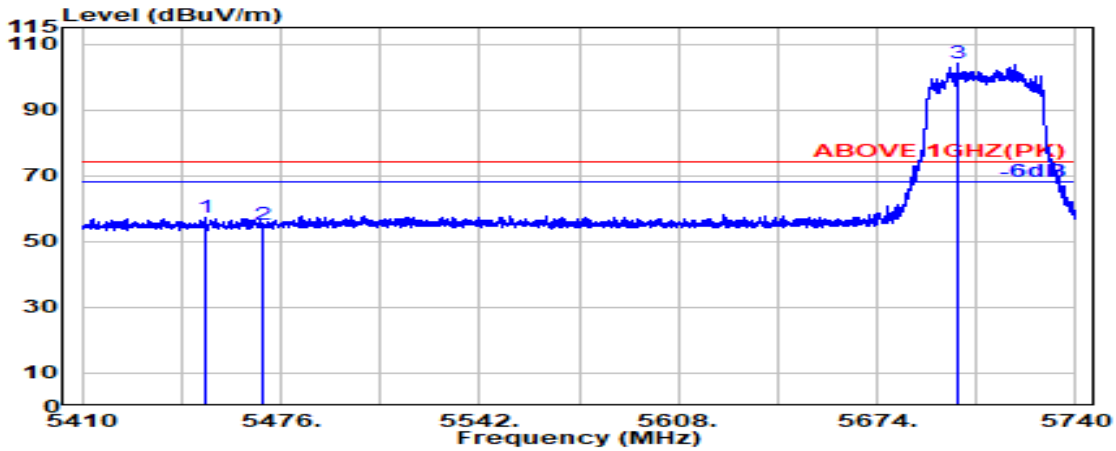

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.900	34.00	8.67	39.25	53.93	57.35	74.00	16.65	Peak
5470.000	34.04	8.69	39.25	51.65	55.12	74.00	18.88	Peak
@ 5700.700	33.60	8.90	39.29	100.89	104.11	---	---	Peak

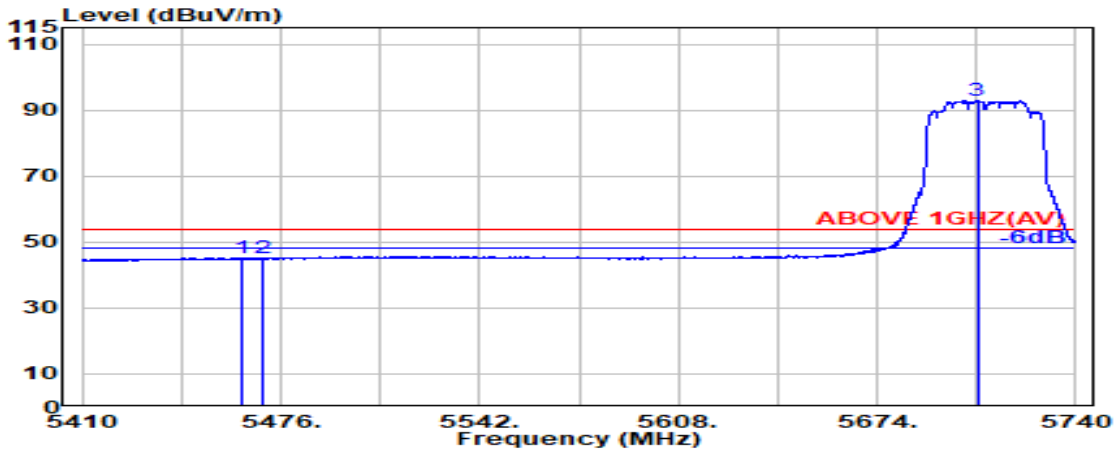


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.03	8.68	39.25	41.66	45.12	54.00	8.88	Average
5470.000	34.04	8.69	39.25	41.61	45.08	54.00	8.92	Average
@ 5707.300	33.60	8.91	39.29	89.76	92.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

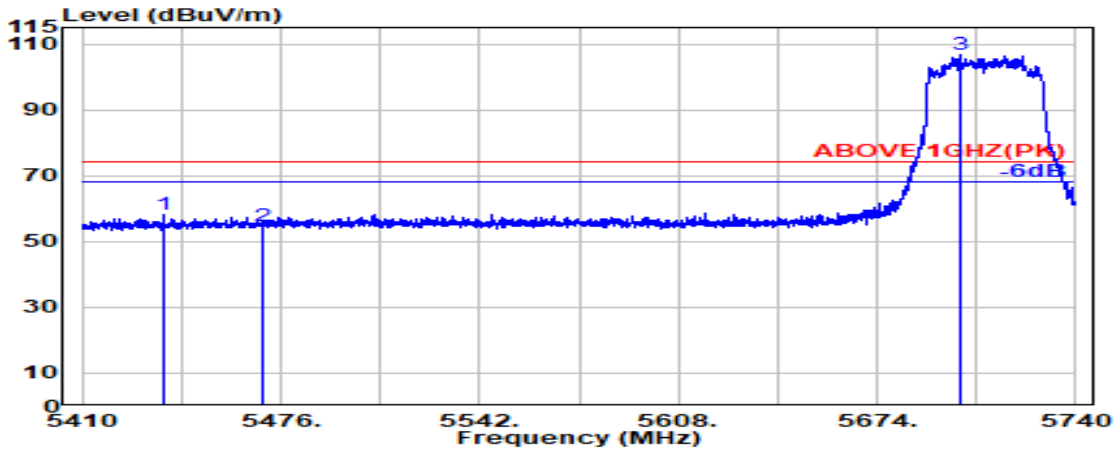

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.100	33.97	8.66	39.25	54.78	58.15	74.00	15.85	Peak
5470.000	34.04	8.69	39.25	51.02	54.50	74.00	19.50	Peak
@ 5701.500	33.60	8.90	39.29	103.37	106.59	---	---	Peak

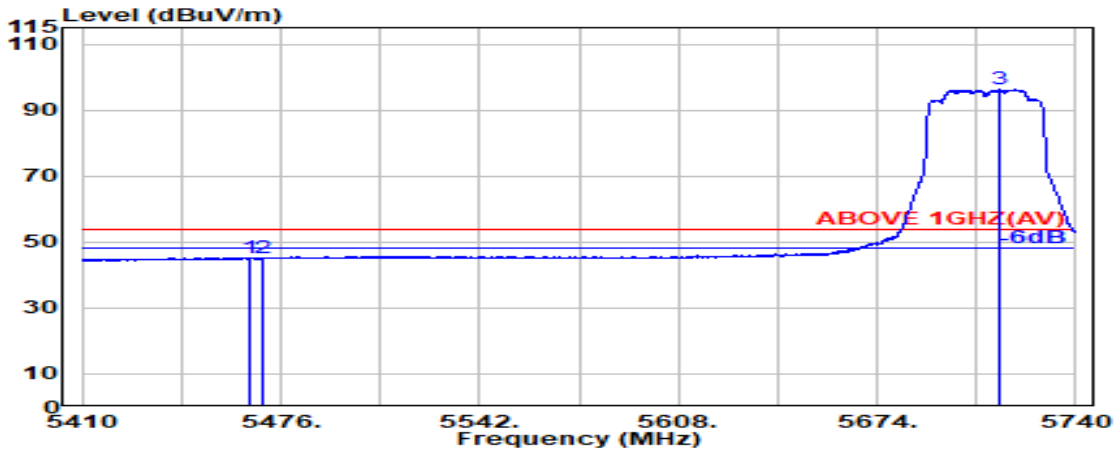


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.25	41.86	45.33	54.00	8.67	Average
5470.000	34.04	8.69	39.25	41.52	44.99	54.00	9.01	Average
@ 5714.800	33.60	8.92	39.29	93.02	96.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

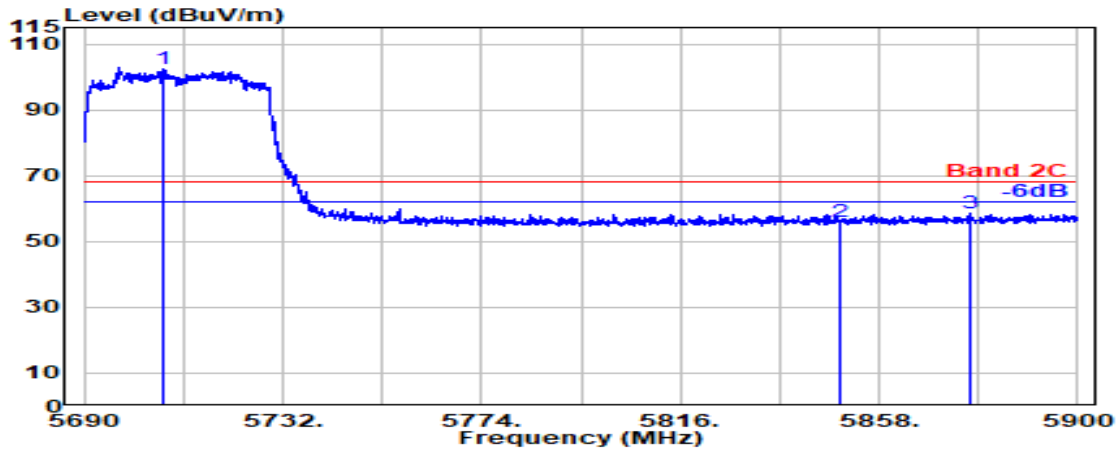

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.700	33.60	8.91	39.29	99.27	102.49	---	---	Peak
5850.000	33.90	9.04	39.31	52.28	55.90	68.20	12.30	Peak
5877.000	34.01	9.06	39.32	54.70	58.45	68.20	9.75	Peak

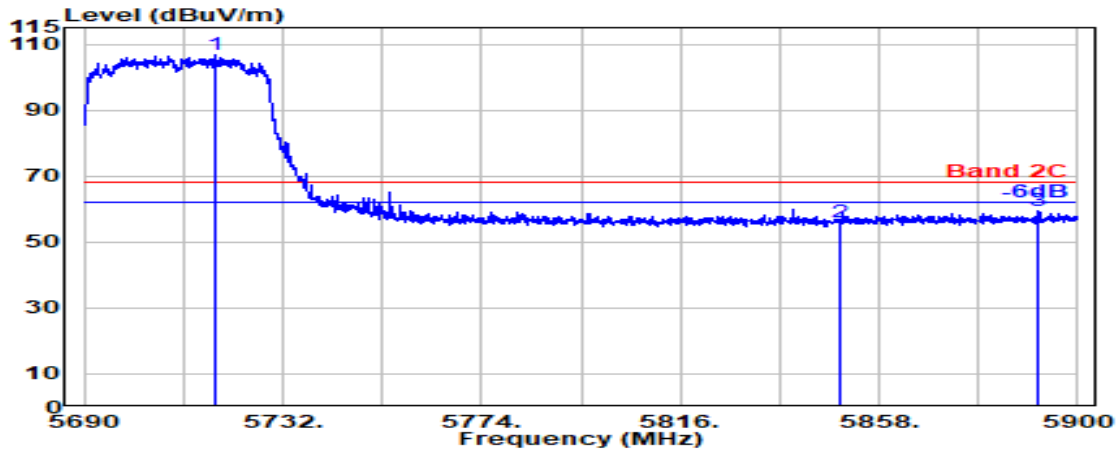


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.800	33.60	8.92	39.29	103.54	106.77	---	---	Peak
5850.000	33.90	9.04	39.31	52.30	55.92	68.20	12.28	Peak
5891.800	34.07	9.08	39.32	55.68	59.51	68.20	8.69	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

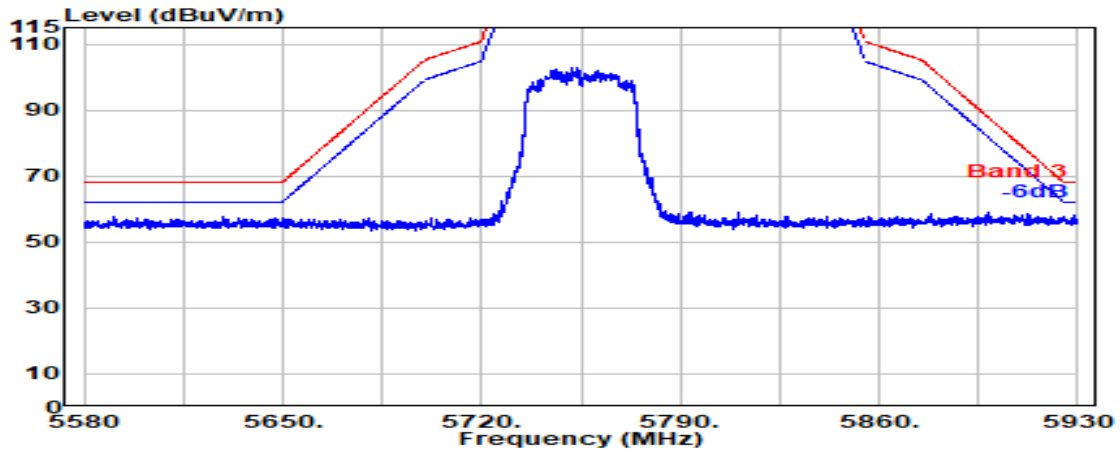


Antenna at Vertical Polarization

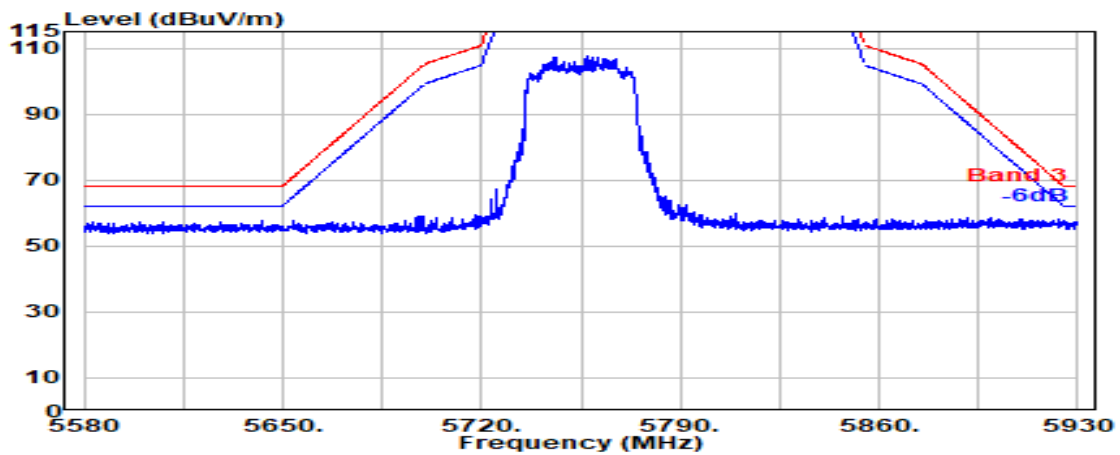


Mode	802.11be-EHT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

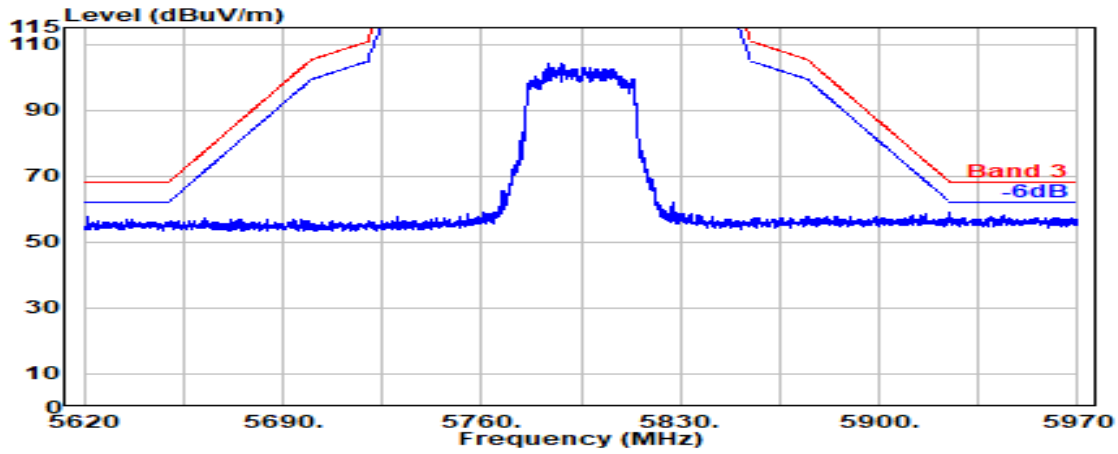

Antenna at Vertical Polarization

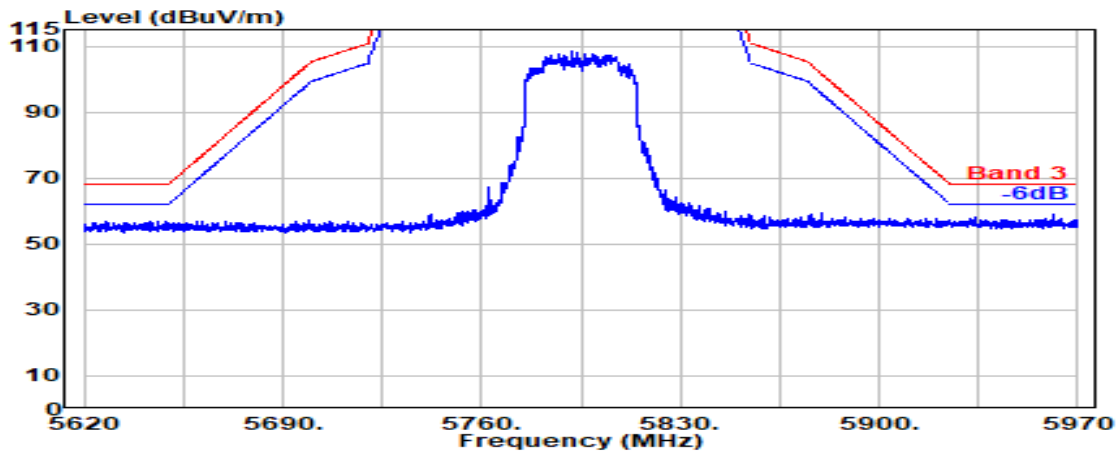


Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

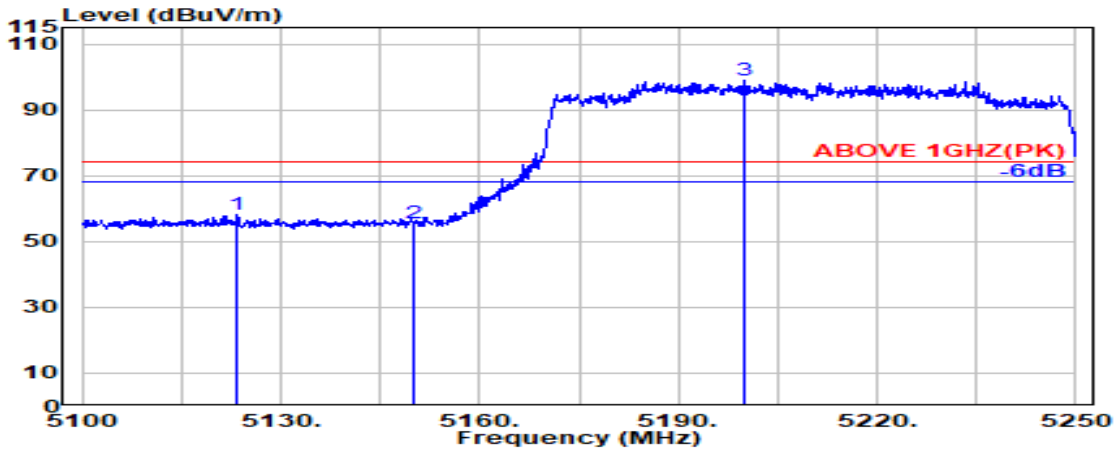

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.500	33.45	8.35	39.27	55.58	58.10	74.00	15.90	Peak
5150.000	33.50	8.37	39.27	53.14	55.74	74.00	18.26	Peak
@ 5199.900	33.80	8.42	39.27	95.81	98.76	---	---	Peak

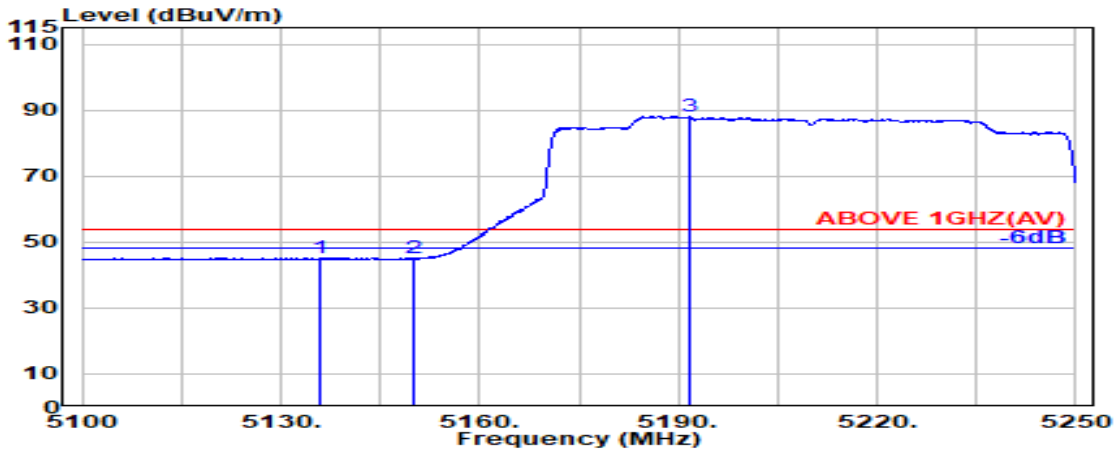


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.000	33.47	8.36	39.27	42.63	45.19	54.00	8.81	Average
5150.000	33.50	8.37	39.27	42.48	45.09	54.00	8.91	Average
@ 5191.700	33.75	8.42	39.27	85.21	88.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

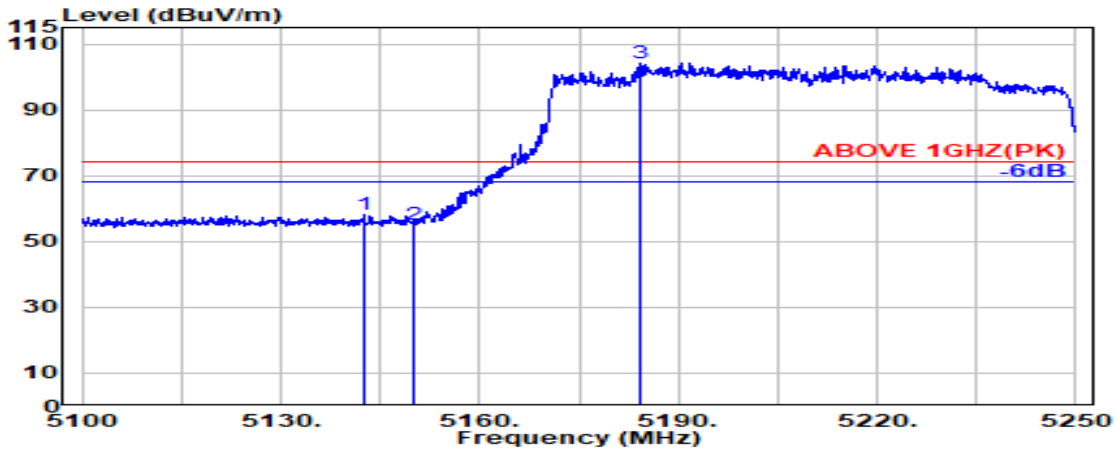

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.500	33.49	8.37	39.27	55.45	58.03	74.00	15.97	Peak
5150.000	33.50	8.37	39.27	52.49	55.09	74.00	18.91	Peak
@ 5184.100	33.70	8.41	39.27	101.25	104.09	---	---	Peak

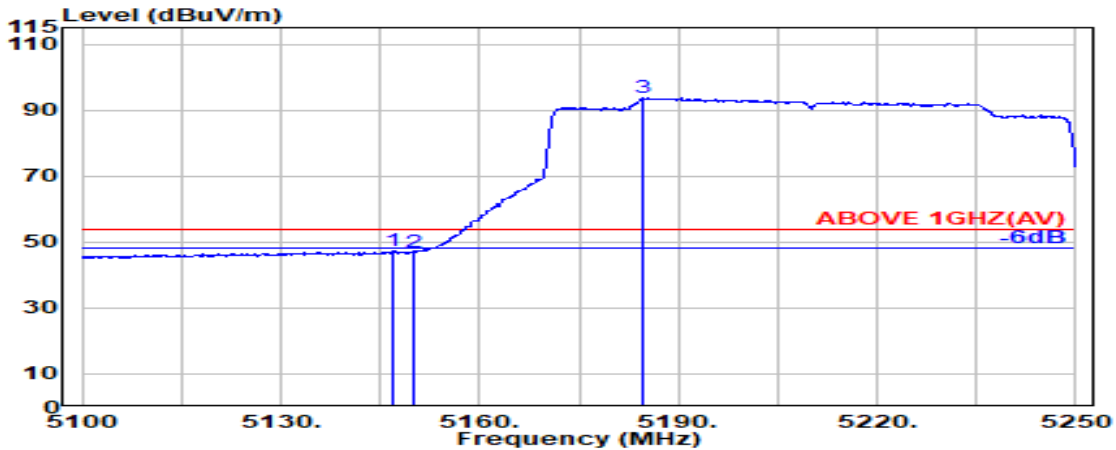


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.49	8.37	39.27	44.67	47.26	54.00	6.74	Average
5150.000	33.50	8.37	39.27	44.25	46.85	54.00	7.15	Average
@ 5184.600	33.71	8.41	39.27	90.75	93.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

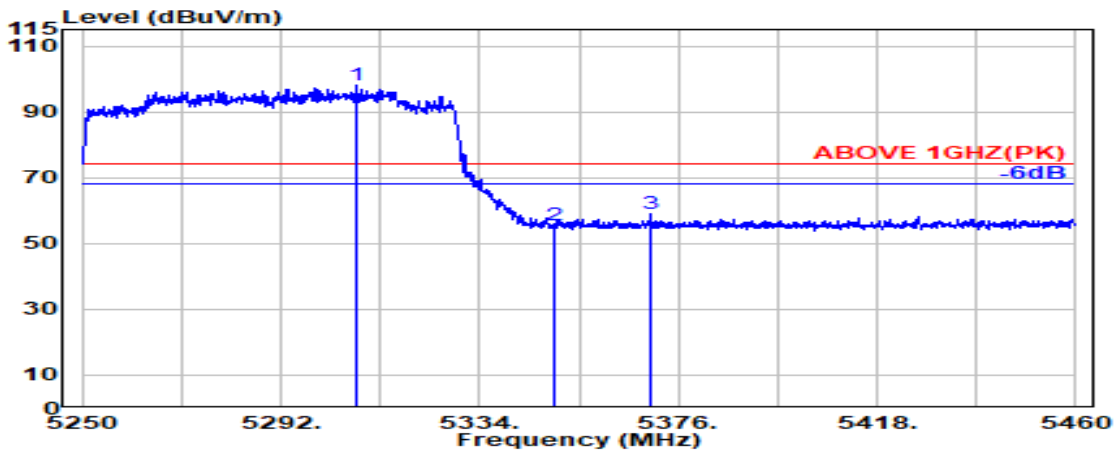

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.900	33.78	8.53	39.26	94.90	97.95	---	---	Peak
5350.000	33.70	8.57	39.26	52.45	55.46	74.00	18.54	Peak
5370.300	33.78	8.59	39.26	55.69	58.80	74.00	15.20	Peak

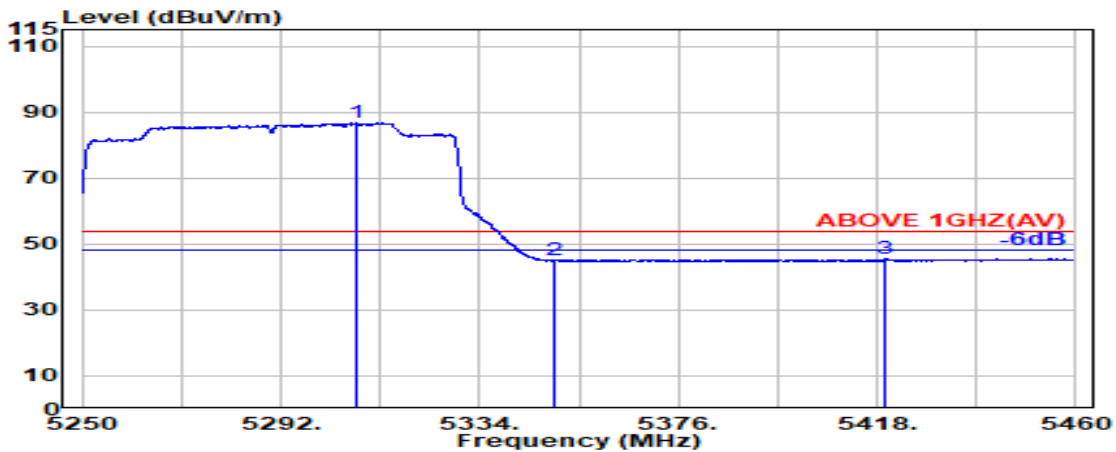


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.000	33.78	8.53	39.26	83.62	86.67	---	---	Average
5350.000	33.70	8.57	39.26	41.93	44.94	54.00	9.06	Average
5419.900	33.94	8.64	39.25	42.13	45.46	54.00	8.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

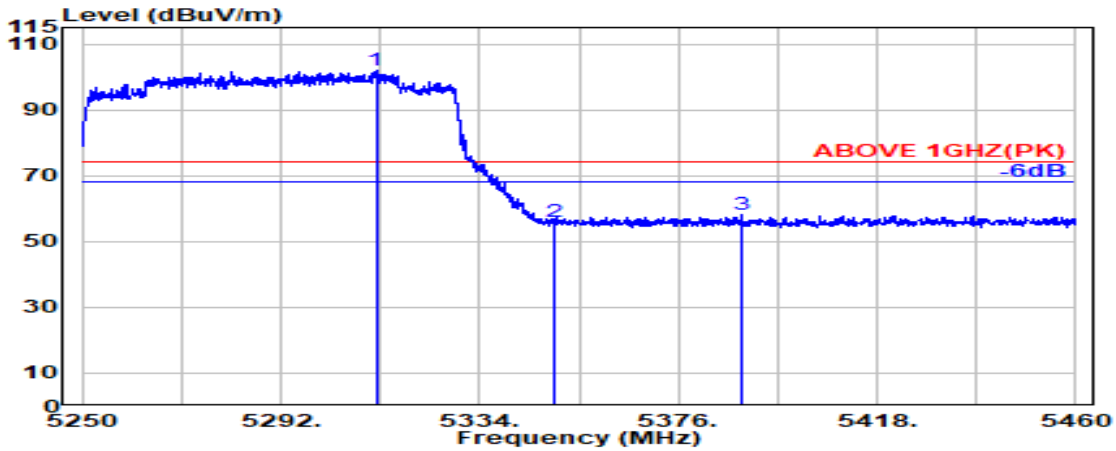

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.100	33.78	8.54	39.26	98.73	101.78	---	---	Peak
5350.000	33.70	8.57	39.26	53.17	56.18	74.00	17.82	Peak
5389.300	33.86	8.61	39.26	54.85	58.06	74.00	15.94	Peak

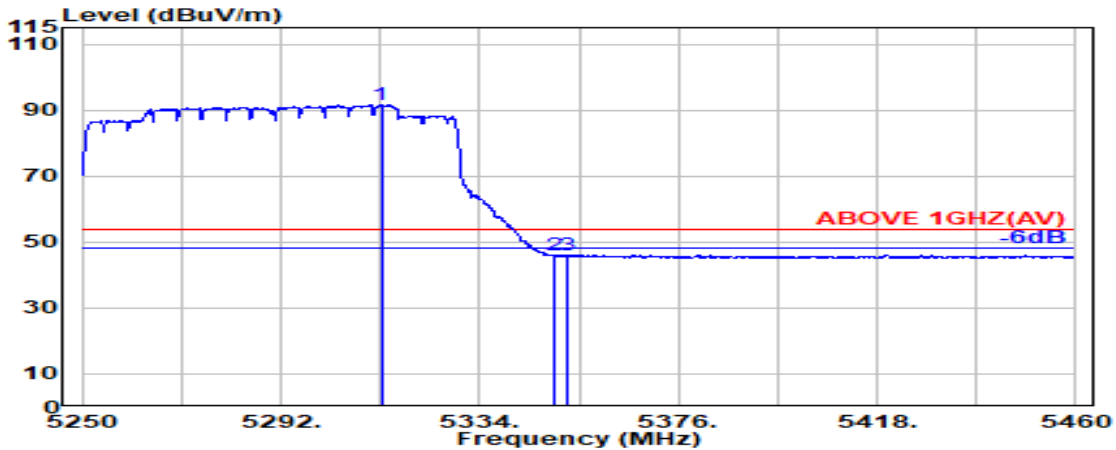


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.200	33.77	8.54	39.26	88.50	91.55	---	---	Average
5350.000	33.70	8.57	39.26	42.84	45.85	54.00	8.15	Average
5352.400	33.71	8.57	39.26	43.01	46.04	54.00	7.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

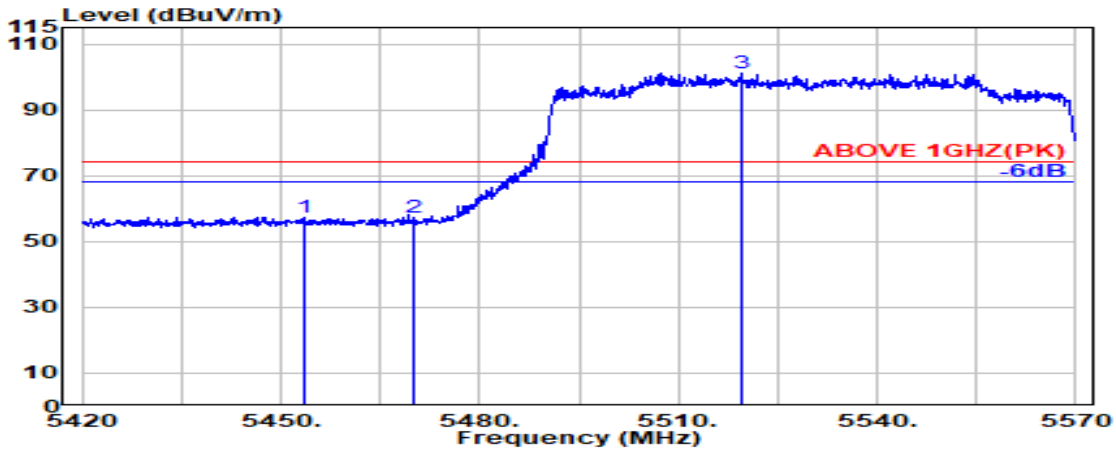

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.500	34.01	8.67	39.25	54.07	57.49	74.00	16.51	Peak
5470.000	34.04	8.69	39.25	53.71	57.18	74.00	16.82	Peak
@ 5519.400	34.06	8.73	39.25	97.46	101.01	---	---	Peak

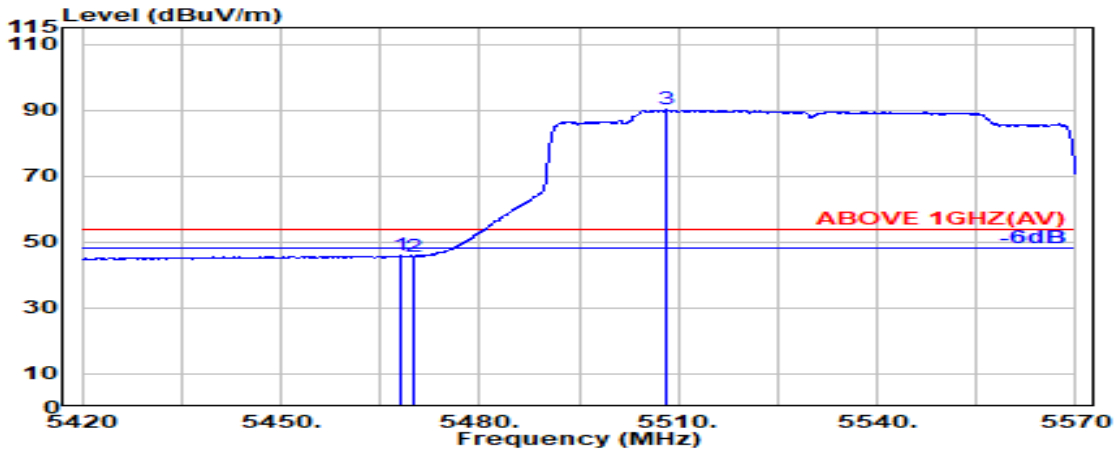


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.25	42.37	45.84	54.00	8.16	Average
5470.000	34.04	8.69	39.25	42.13	45.60	54.00	8.40	Average
@ 5508.300	34.08	8.72	39.25	86.50	90.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

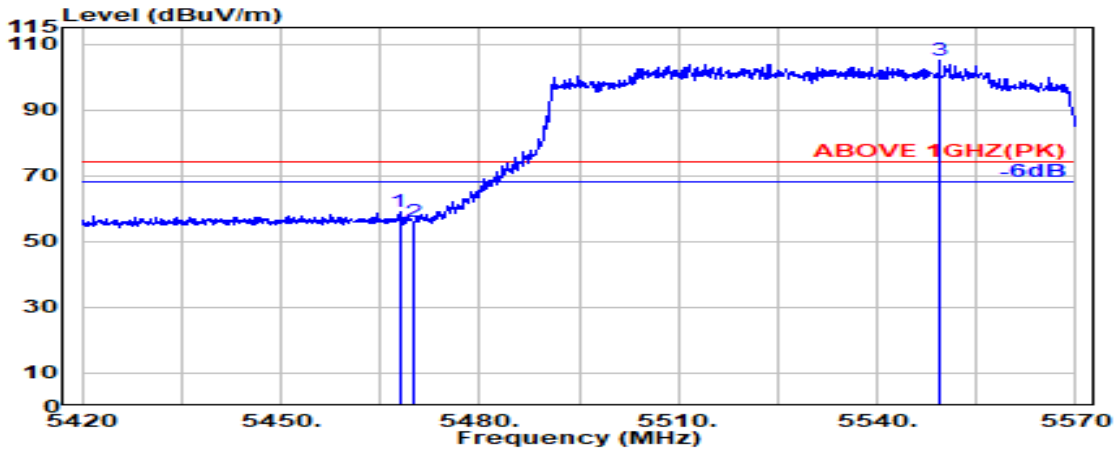

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.69	39.25	55.49	58.96	74.00	15.04	Peak
5470.000	34.04	8.69	39.25	52.30	55.78	74.00	18.22	Peak
@ 5549.400	34.00	8.76	39.26	101.43	104.93	---	---	Peak

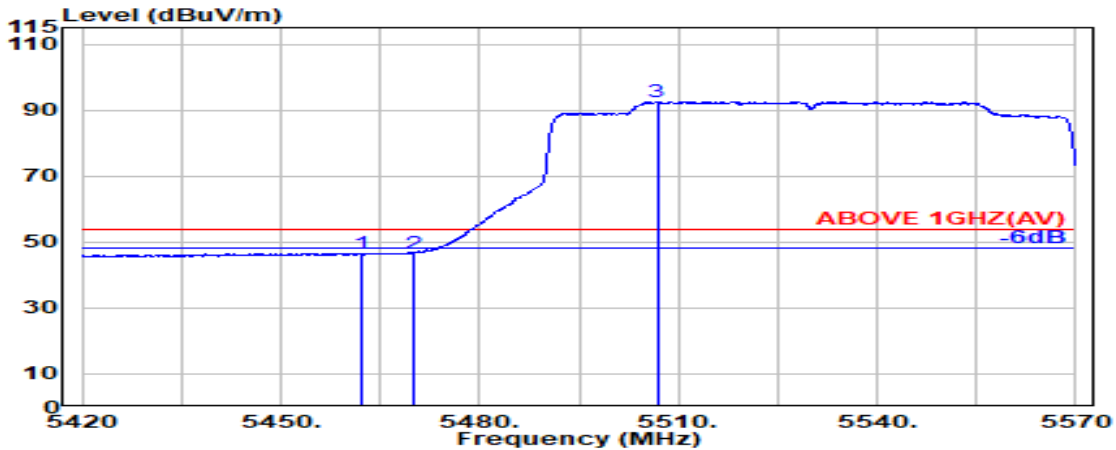

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.02	8.68	39.25	43.19	46.65	54.00	7.35	Average
5470.000	34.04	8.69	39.25	43.16	46.63	54.00	7.37	Average
@ 5506.800	34.09	8.72	39.25	89.08	92.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

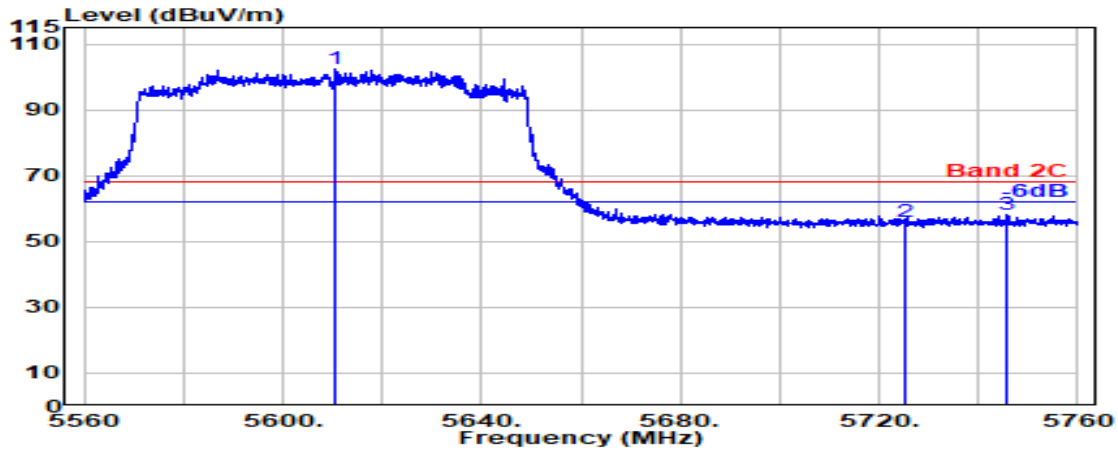

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5610.700	33.80	8.82	39.27	98.93	102.28	---	---	Peak
5725.000	33.60	8.93	39.29	52.69	55.93	68.20	12.27	Peak
5745.900	33.60	8.94	39.30	55.01	58.26	68.20	9.94	Peak

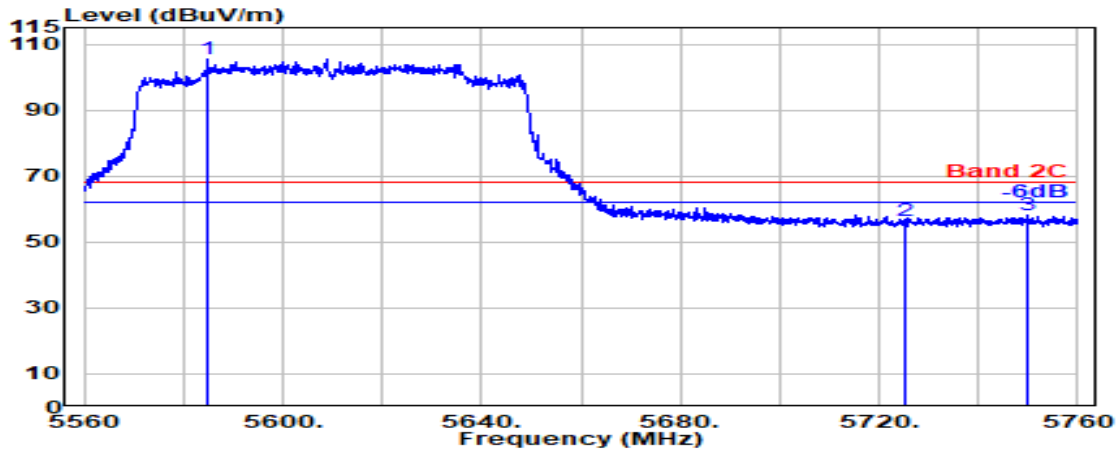


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5584.800	33.86	8.80	39.27	102.07	105.46	---	---	Peak
5725.000	33.60	8.93	39.29	53.01	56.24	68.20	11.96	Peak
5749.800	33.60	8.95	39.30	54.79	58.04	68.20	10.16	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

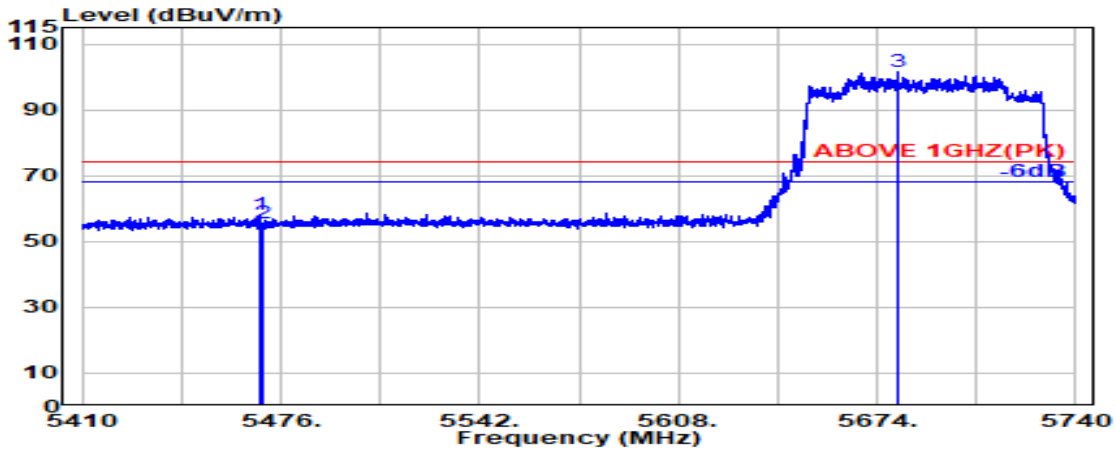

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.25	54.54	58.01	74.00	15.99	Peak
5470.000	34.04	8.69	39.25	52.03	55.50	74.00	18.50	Peak
@ 5681.000	33.68	8.89	39.28	98.28	101.55	---	---	Peak

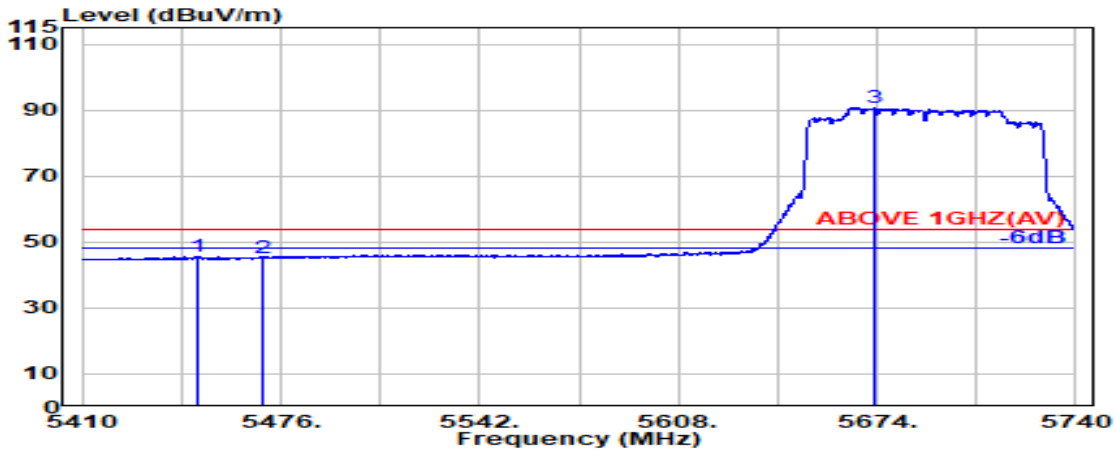


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.000	34.00	8.67	39.25	42.13	45.54	54.00	8.46	Average
5470.000	34.04	8.69	39.25	41.68	45.15	54.00	8.85	Average
@ 5673.000	33.71	8.88	39.28	87.45	90.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

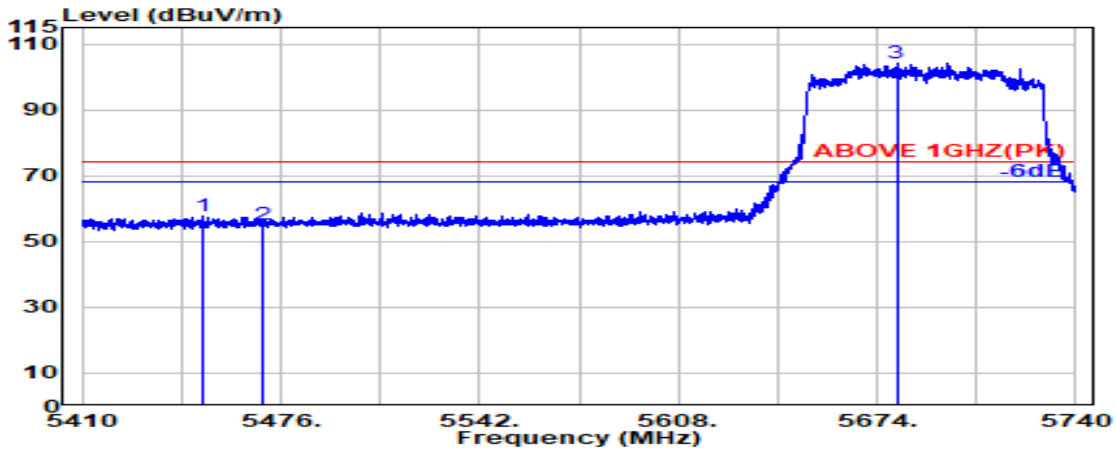

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.000	34.00	8.67	39.25	54.37	57.78	74.00	16.22	Peak
5470.000	34.04	8.69	39.25	51.49	54.96	74.00	19.04	Peak
@ 5680.500	33.68	8.88	39.28	100.87	104.15	---	---	Peak

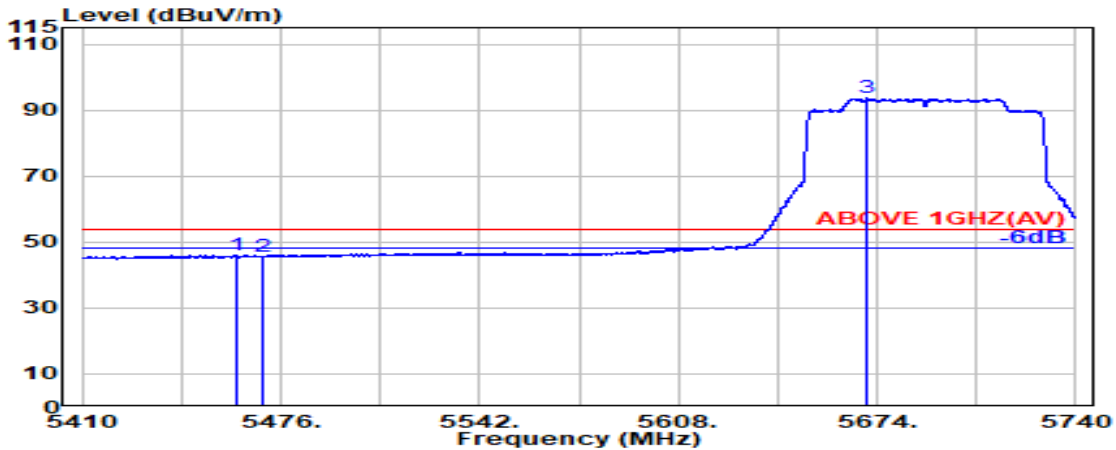


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.000	34.02	8.68	39.25	42.50	45.95	54.00	8.05	Average
5470.000	34.04	8.69	39.25	42.17	45.65	54.00	8.35	Average
@ 5670.800	33.72	8.88	39.28	90.22	93.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

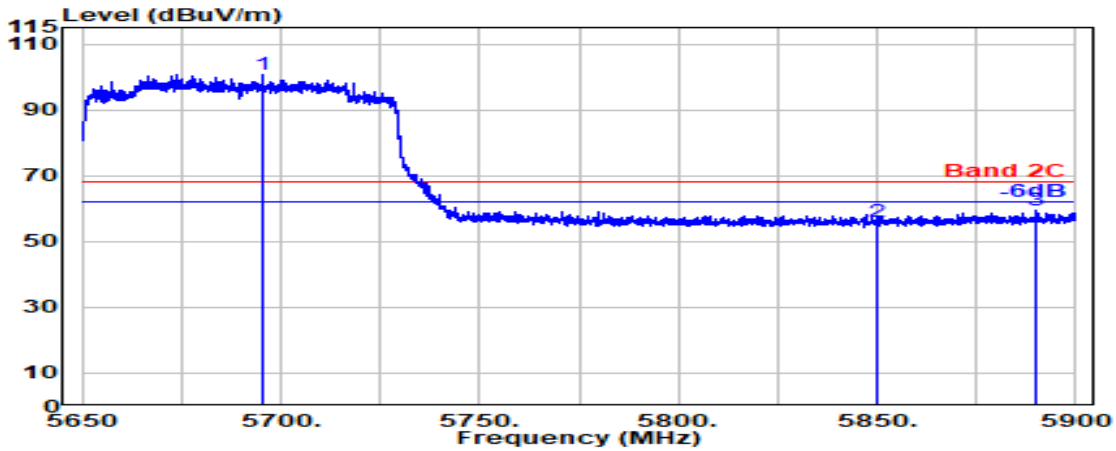

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.571	33.62	8.90	39.29	97.44	100.67	---	---	Peak
5850.000	33.90	9.04	39.31	52.28	55.90	68.20	12.30	Peak
5890.214	34.06	9.07	39.32	55.47	59.28	68.20	8.92	Peak

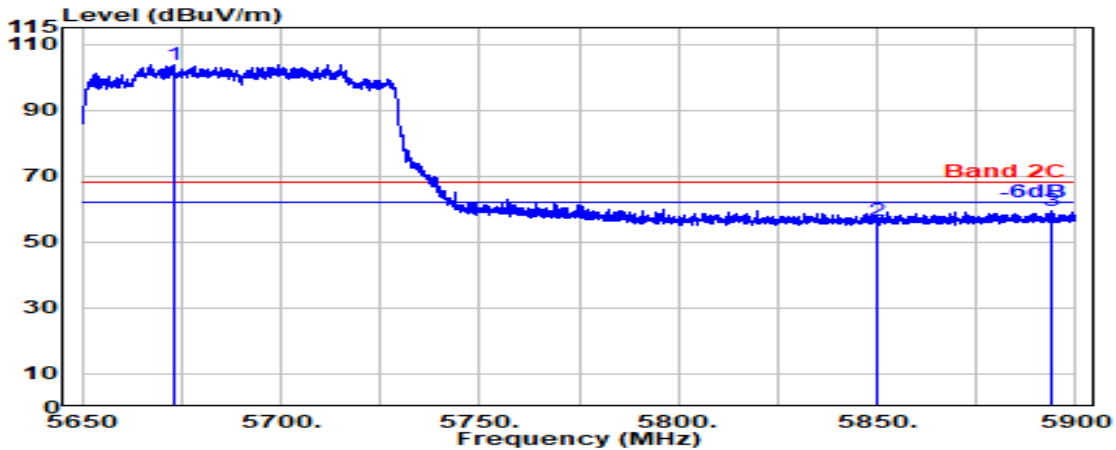


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.071	33.71	8.88	39.28	100.53	103.83	---	---	Peak
5850.000	33.90	9.04	39.31	52.94	56.56	68.20	11.64	Peak
5893.786	34.08	9.08	39.32	55.69	59.52	68.20	8.68	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

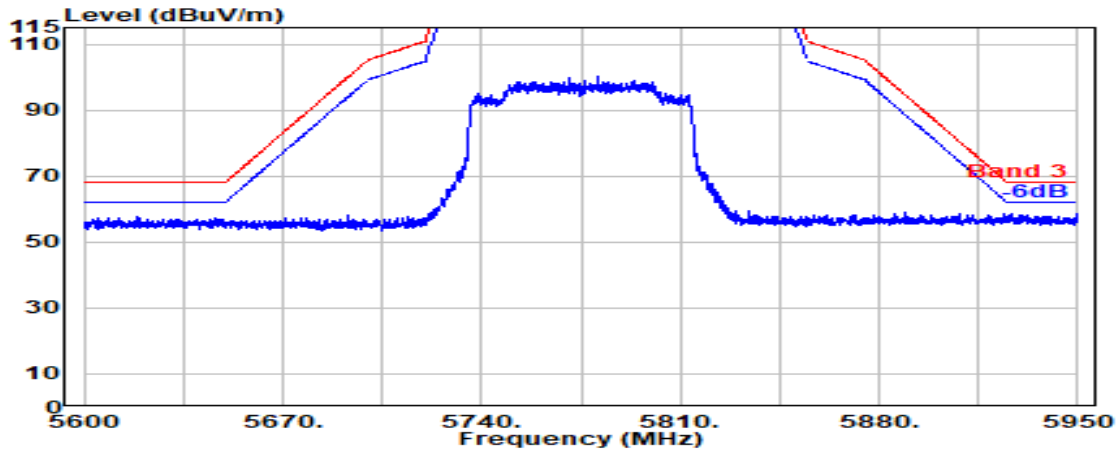

Antenna at Vertical Polarization

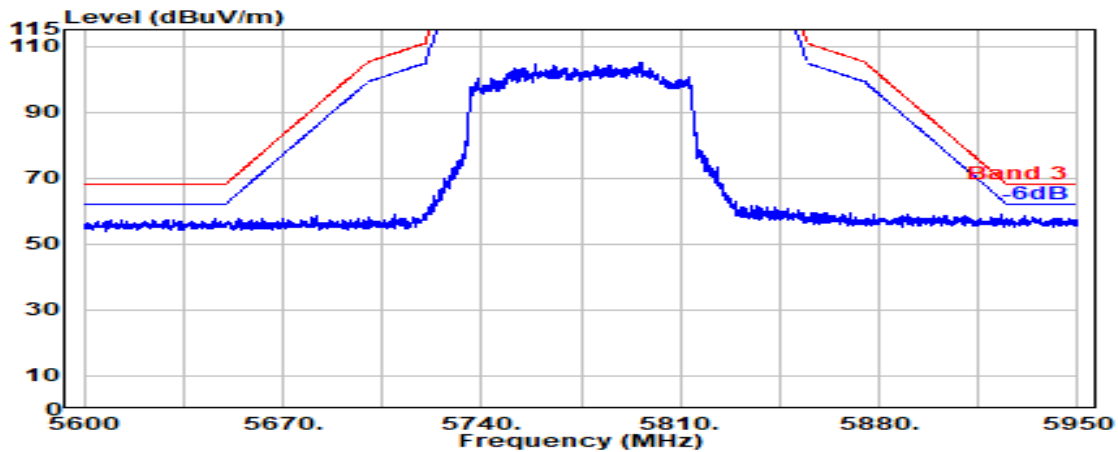


Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

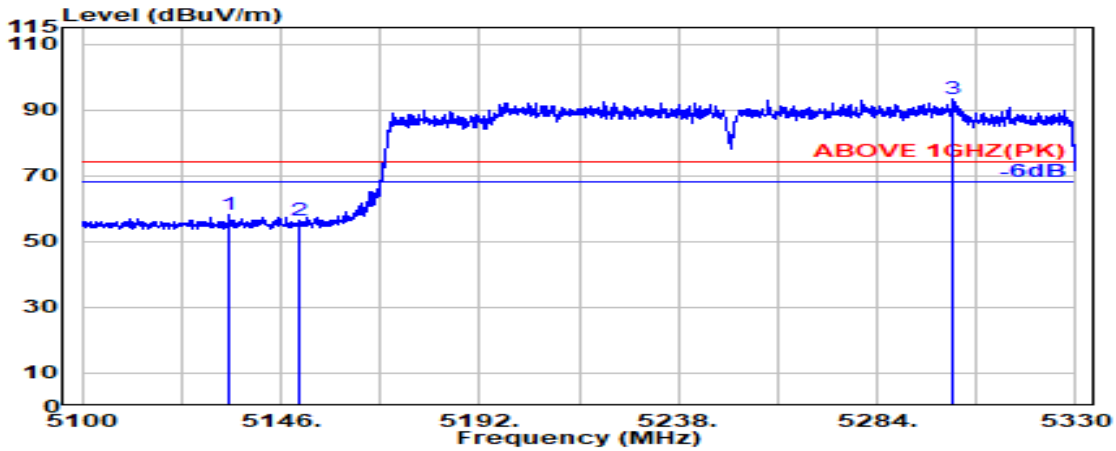

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.200	33.47	8.36	39.27	55.68	58.24	74.00	15.76	Peak
5150.000	33.50	8.37	39.27	53.80	56.40	74.00	17.60	Peak
@ 5301.500	33.80	8.53	39.26	90.06	93.12	---	---	Peak

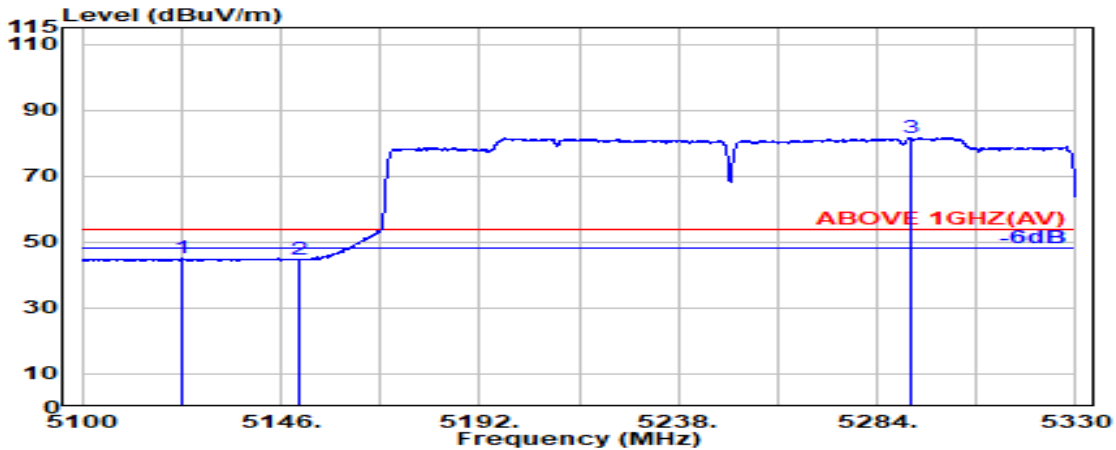


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.000	33.45	8.35	39.27	42.44	44.96	54.00	9.04	Average
5150.000	33.50	8.37	39.27	42.08	44.69	54.00	9.31	Average
@ 5291.600	33.78	8.52	39.26	78.69	81.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

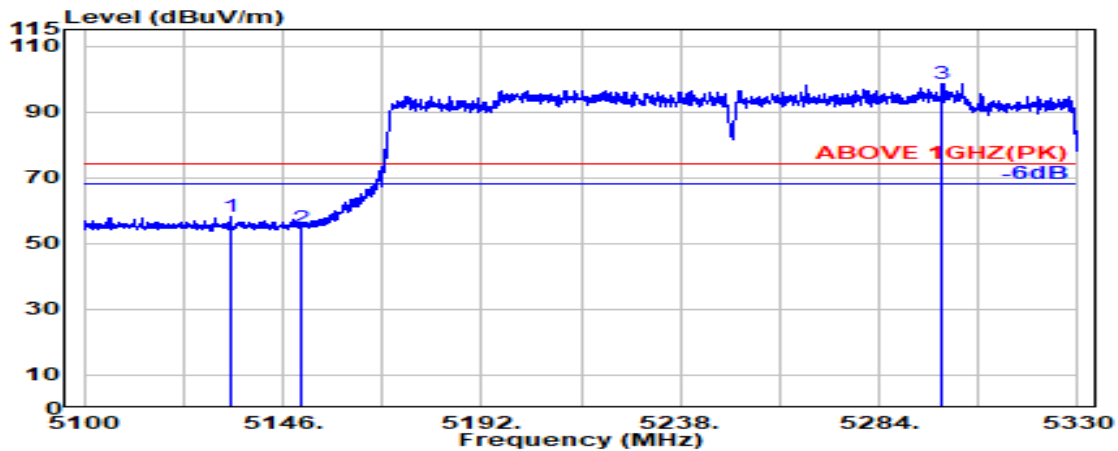

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.700	33.47	8.36	39.27	55.80	58.35	74.00	15.65	Peak
5150.000	33.50	8.37	39.27	52.27	54.87	74.00	19.13	Peak
@ 5298.700	33.80	8.52	39.26	95.38	98.44	---	---	Peak

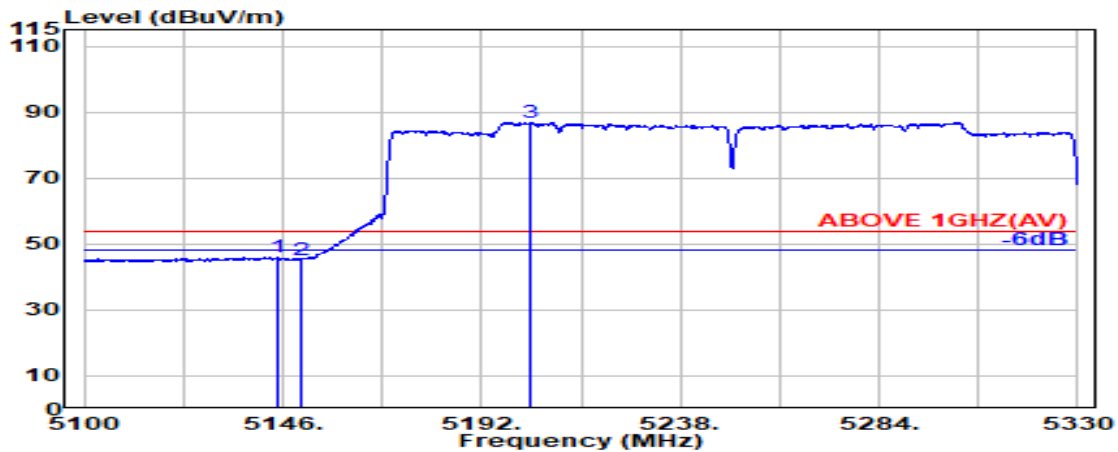


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	33.49	8.37	39.27	43.25	45.83	54.00	8.17	Average
5150.000	33.50	8.37	39.27	42.69	45.29	54.00	8.71	Average
@ 5203.500	33.79	8.43	39.27	83.86	86.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

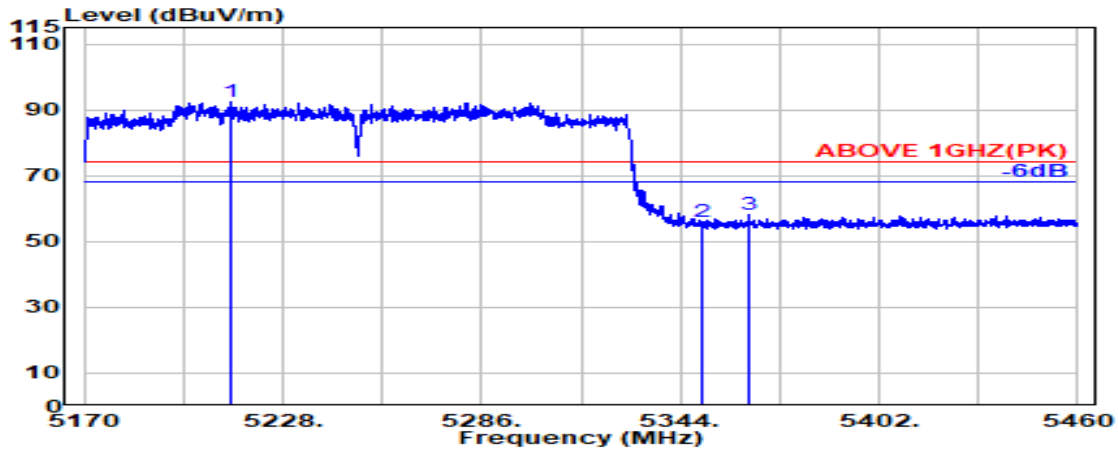

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5212.600	33.77	8.44	39.27	89.32	92.26	---	---	Peak
5350.000	33.70	8.57	39.26	52.89	55.91	74.00	18.09	Peak
5364.100	33.76	8.59	39.26	55.09	58.17	74.00	15.83	Peak

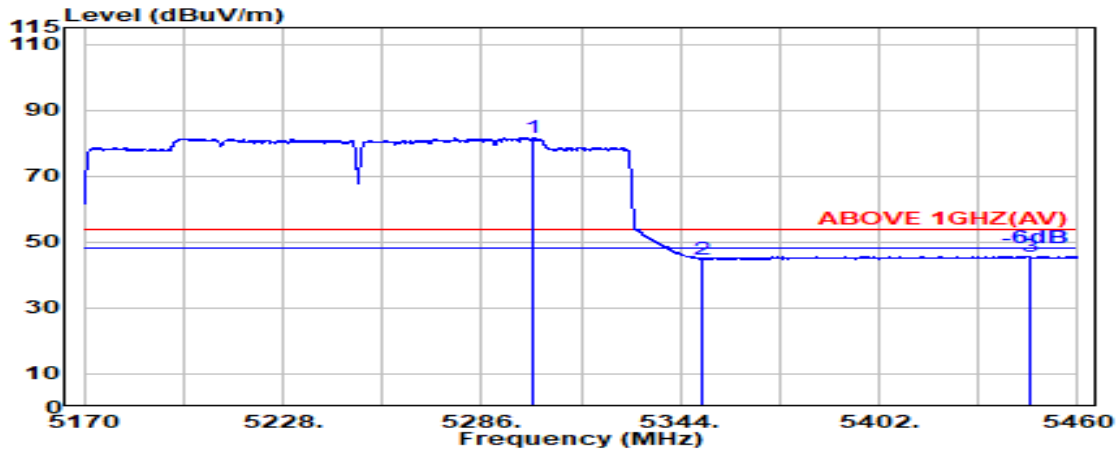


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.000	33.80	8.52	39.26	78.54	81.60	---	---	Average
5350.000	33.70	8.57	39.26	41.85	44.87	54.00	9.13	Average
5446.100	33.99	8.67	39.25	42.37	45.77	54.00	8.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

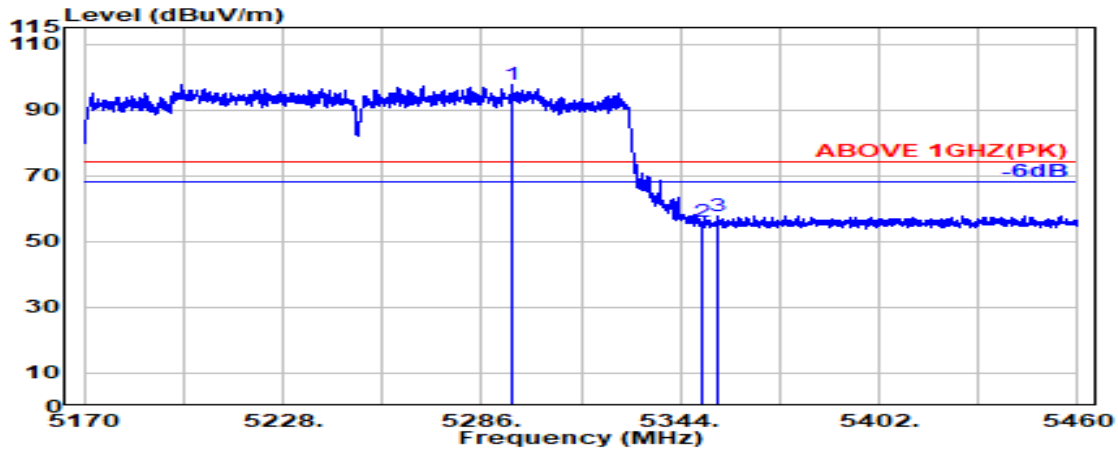

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5294.900	33.79	8.52	39.26	94.53	97.58	---	---	Peak
5350.000	33.70	8.57	39.26	52.92	55.93	74.00	18.07	Peak
5354.800	33.72	8.58	39.26	54.75	57.79	74.00	16.21	Peak

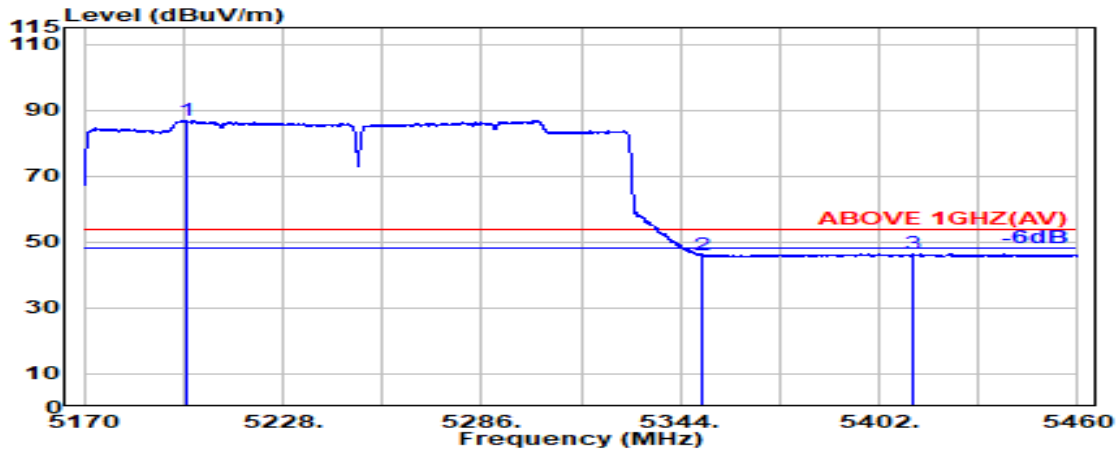


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5199.900	33.80	8.42	39.27	83.89	86.85	---	---	Average
5350.000	33.70	8.57	39.26	43.04	46.06	54.00	7.94	Average
5411.800	33.92	8.63	39.26	43.10	46.40	54.00	7.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

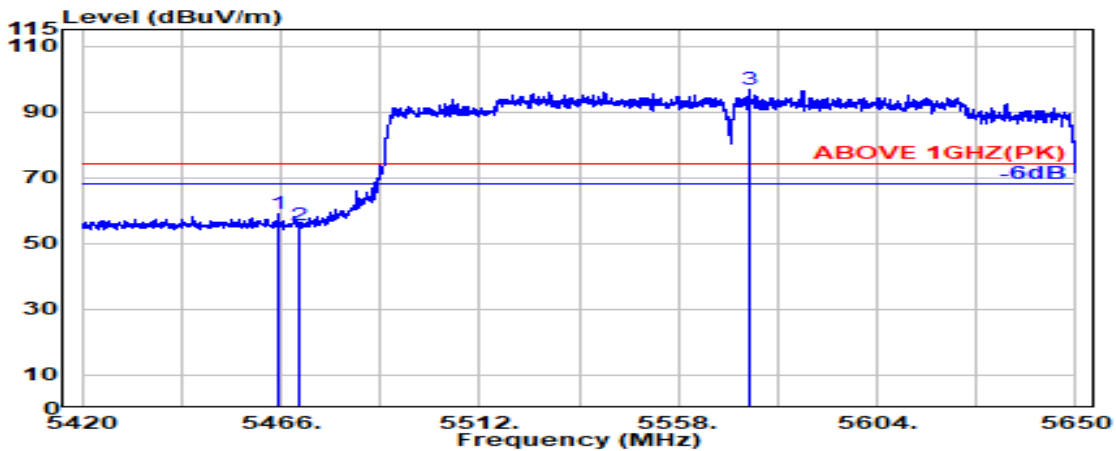

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.25	55.64	59.11	74.00	14.89	Peak
5470.000	34.04	8.69	39.25	52.27	55.75	74.00	18.25	Peak
@ 5574.200	33.90	8.79	39.26	93.18	96.61	---	---	Peak

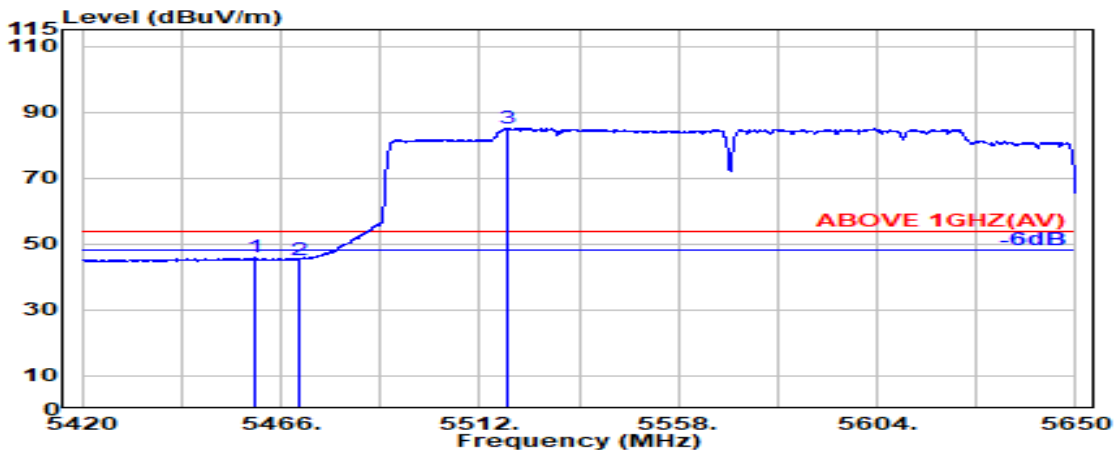


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5459.900	34.02	8.68	39.25	42.39	45.84	54.00	8.16	Average
5470.000	34.04	8.69	39.25	41.85	45.33	54.00	8.67	Average
5518.200	34.06	8.73	39.25	81.67	85.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

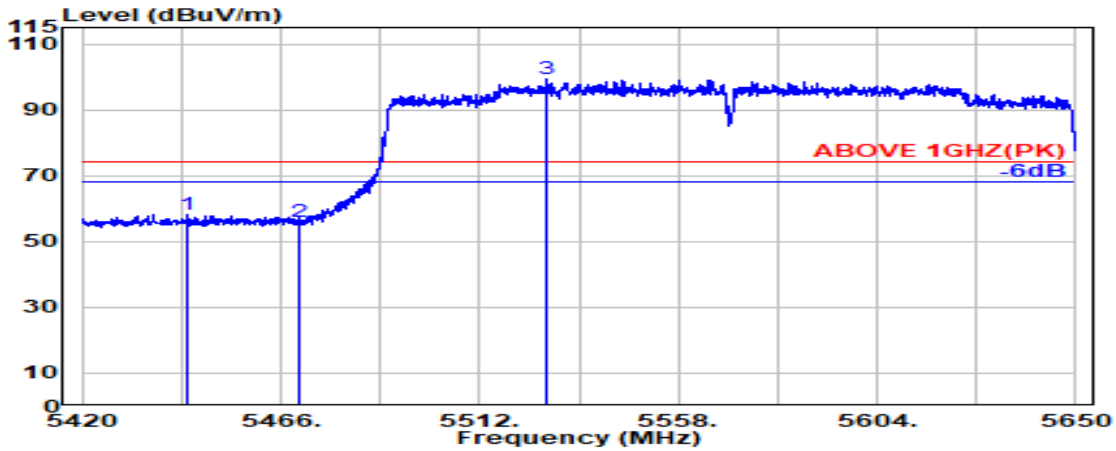

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.300	33.99	8.66	39.25	54.70	58.10	74.00	15.90	Peak
5470.000	34.04	8.69	39.25	52.60	56.07	74.00	17.93	Peak
@ 5527.300	34.05	8.74	39.26	95.66	99.20	---	---	Peak

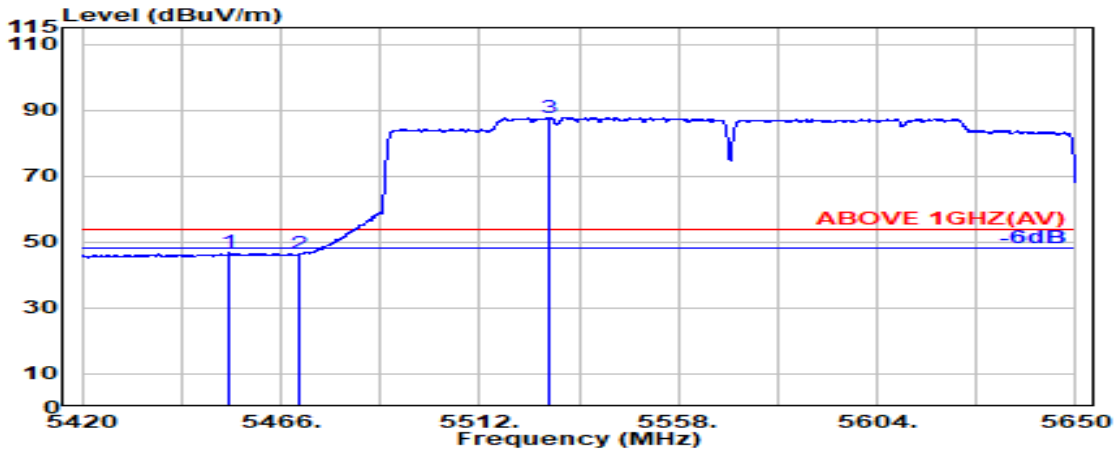


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5454.000	34.01	8.67	39.25	43.24	46.67	54.00	7.33	Average
5470.000	34.04	8.69	39.25	42.88	46.36	54.00	7.64	Average
5527.900	34.04	8.74	39.26	84.17	87.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

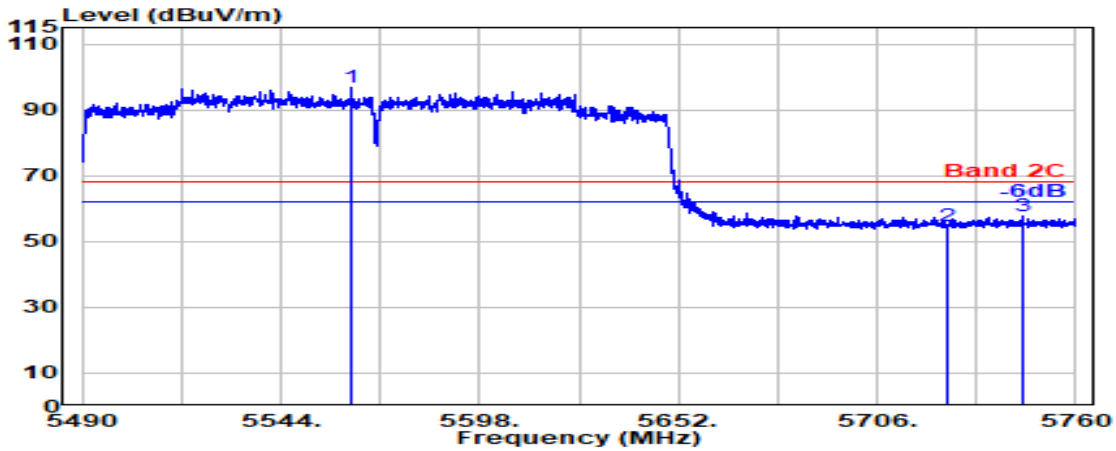

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5563.200	33.95	8.78	39.26	93.31	96.77	---	---	Peak
5725.000	33.60	8.93	39.29	51.63	54.87	68.20	13.33	Peak
5745.600	33.60	8.94	39.30	54.30	57.55	68.20	10.65	Peak

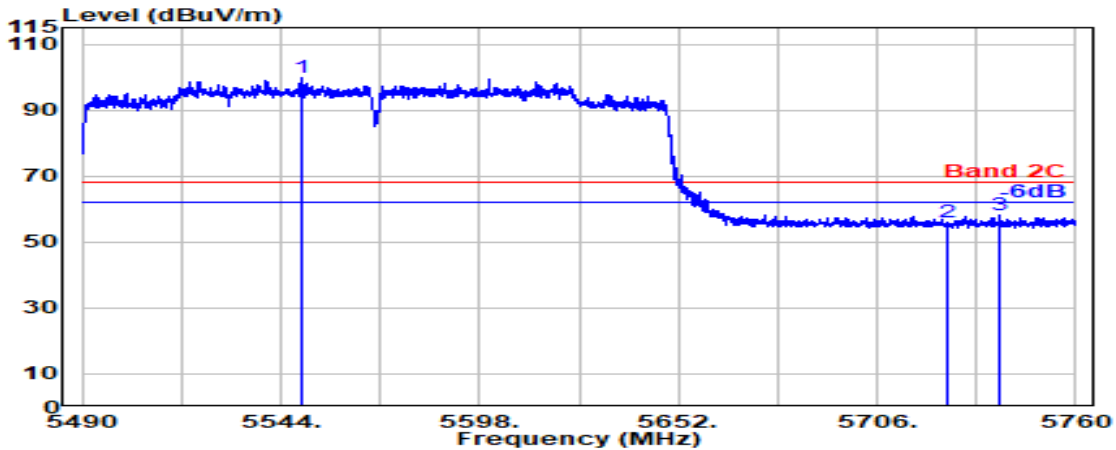


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5549.400	34.00	8.76	39.26	96.30	99.80	---	---	Peak
5725.000	33.60	8.93	39.29	52.68	55.92	68.20	12.28	Peak
5739.300	33.60	8.94	39.29	54.96	58.21	68.20	9.99	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

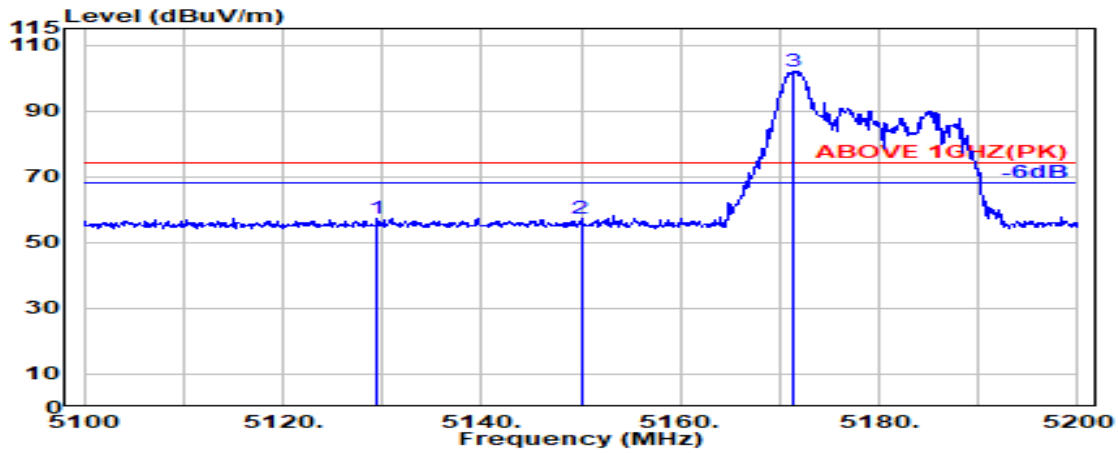

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.500	33.46	8.35	39.27	54.91	57.45	74.00	16.55	Peak
5150.000	33.50	8.37	39.27	54.62	57.22	74.00	16.78	Peak
@ 5171.300	33.63	8.40	39.27	99.36	102.12	---	---	Peak

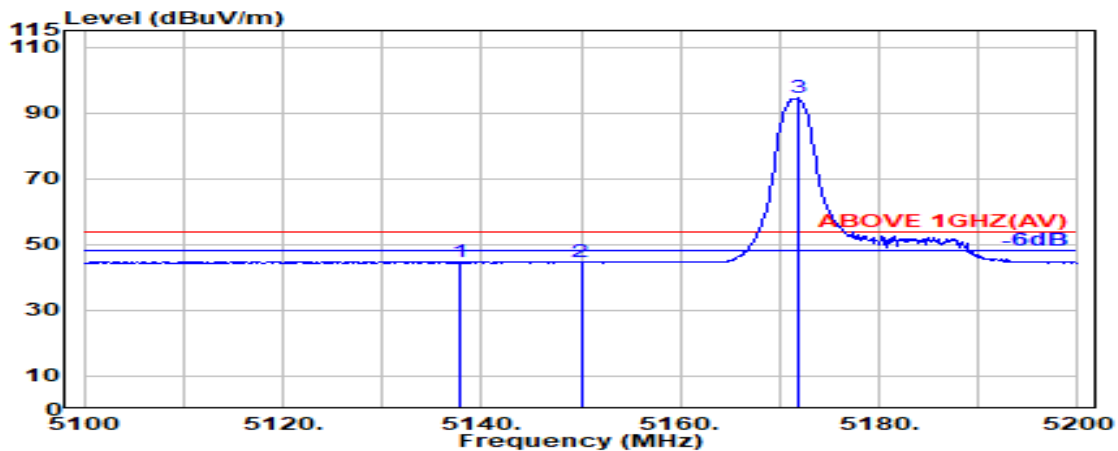


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.900	33.48	8.36	39.27	42.28	44.84	54.00	9.16	Average
5150.000	33.50	8.37	39.27	41.98	44.59	54.00	9.41	Average
@ 5171.900	33.63	8.40	39.27	91.78	94.53	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

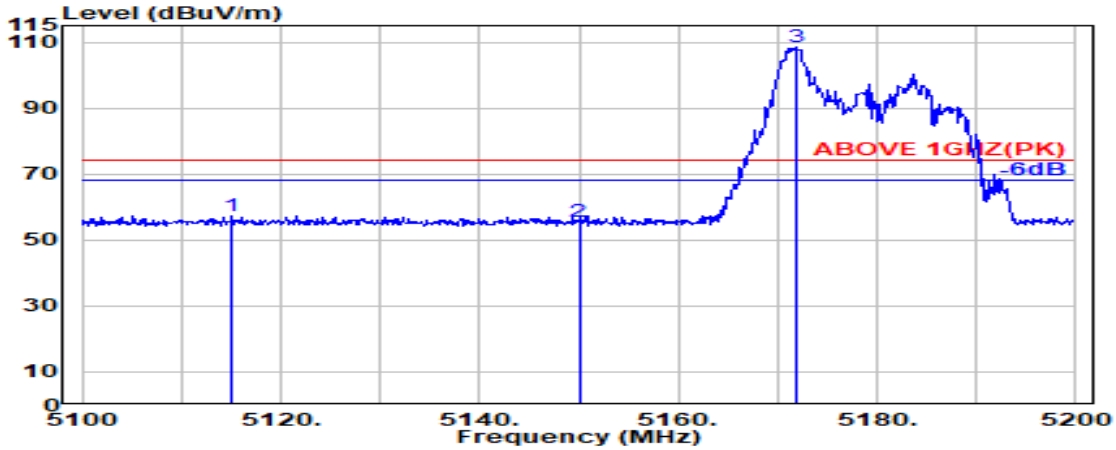

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.100	33.43	8.34	39.27	54.95	57.45	74.00	16.55	Peak
5150.000	33.50	8.37	39.27	52.81	55.41	74.00	18.59	Peak
@ 5171.900	33.63	8.40	39.27	105.79	108.54	---	---	Peak

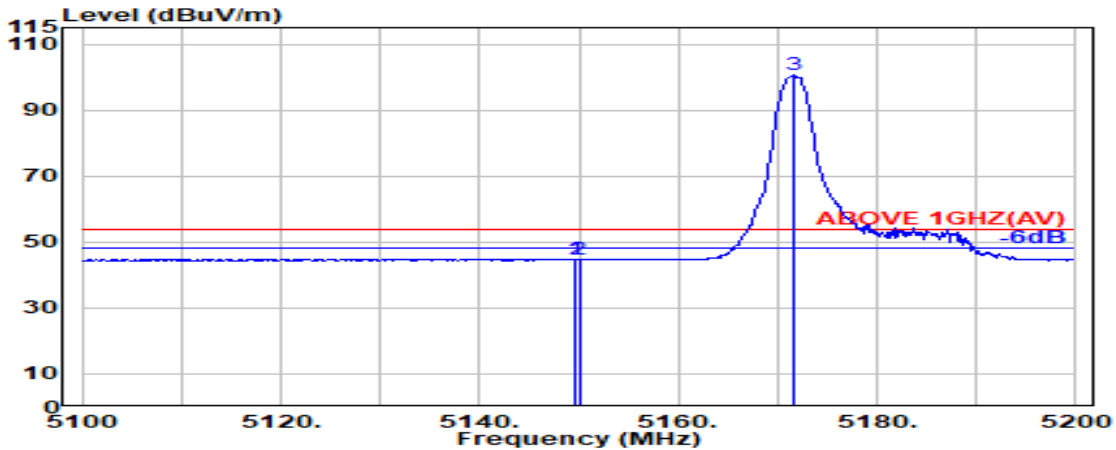


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.27	42.23	44.83	54.00	9.17	Average
5150.000	33.50	8.37	39.27	42.00	44.60	54.00	9.40	Average
@ 5171.700	33.63	8.40	39.27	97.77	100.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

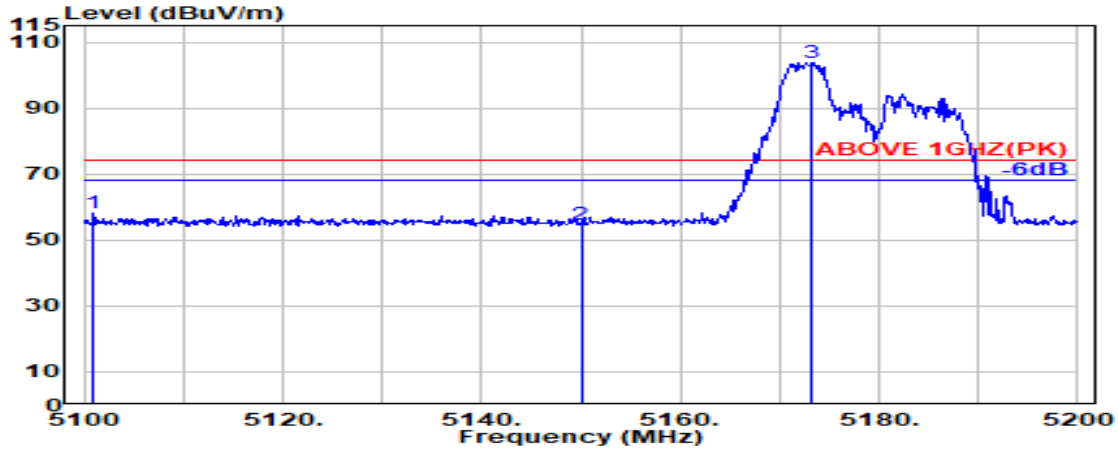

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.000	33.40	8.32	39.27	55.90	58.35	74.00	15.65	Peak
5150.000	33.50	8.37	39.27	51.96	54.57	74.00	19.43	Peak
@ 5173.200	33.64	8.40	39.27	101.08	103.84	---	---	Peak

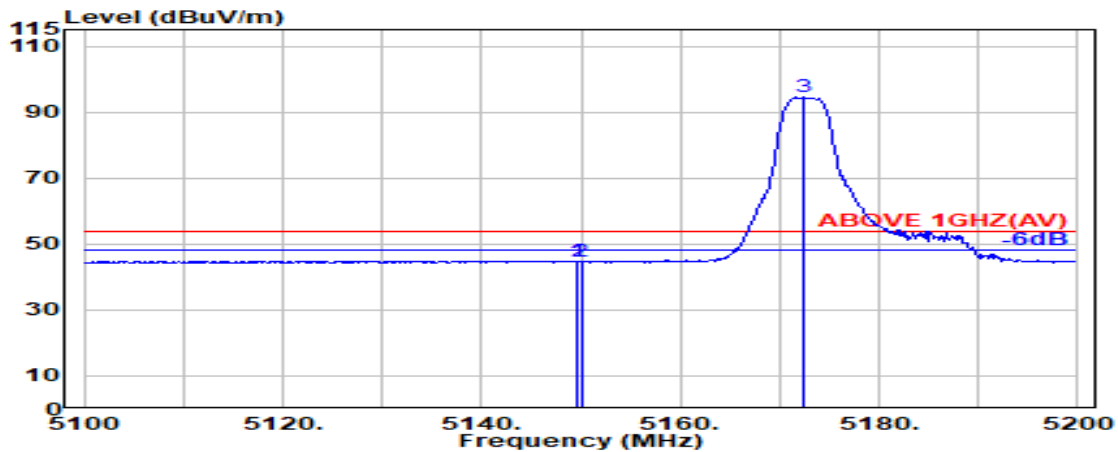


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.27	42.23	44.83	54.00	9.17	Average
5150.000	33.50	8.37	39.27	42.19	44.80	54.00	9.20	Average
@ 5172.300	33.63	8.40	39.27	91.68	94.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

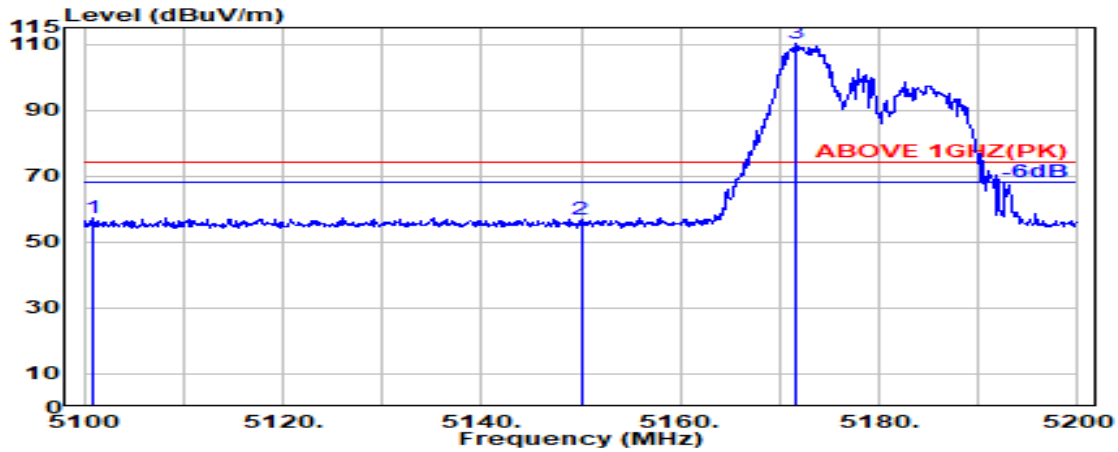

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5100.900	33.40	8.32	39.27	54.72	57.17	74.00	16.83	Peak
5150.000	33.50	8.37	39.27	54.30	56.91	74.00	17.09	Peak
@ 5171.700	33.63	8.40	39.27	107.62	110.38	---	---	Peak

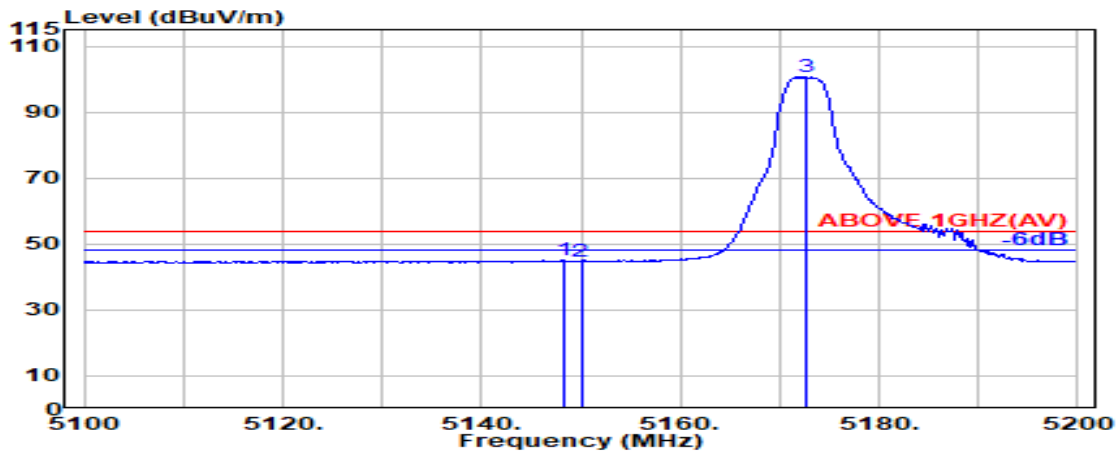


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.200	33.50	8.37	39.27	42.45	45.05	54.00	8.95	Average
5150.000	33.50	8.37	39.27	42.16	44.76	54.00	9.24	Average
@ 5172.600	33.64	8.40	39.27	97.88	100.64	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

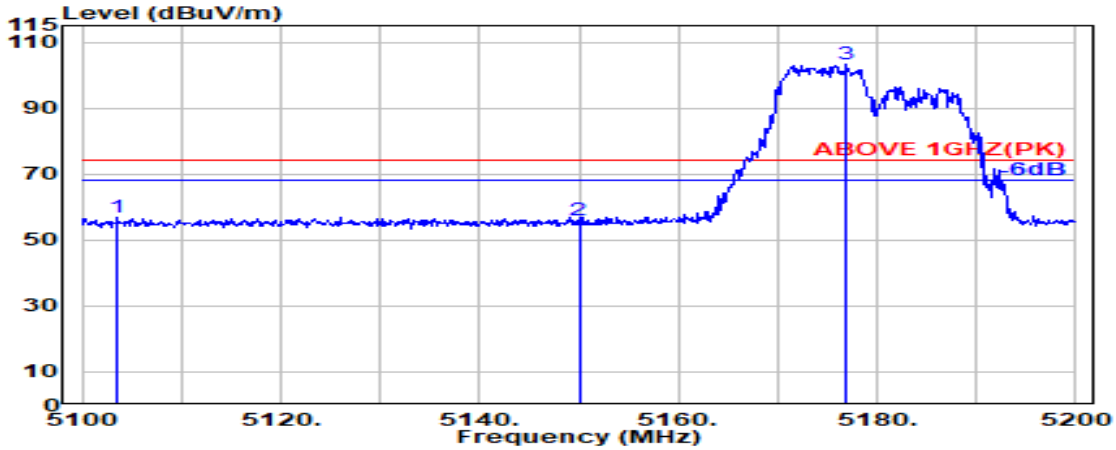

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.500	33.41	8.33	39.27	54.45	56.91	74.00	17.09	Peak
5150.000	33.50	8.37	39.27	53.45	56.05	74.00	17.95	Peak
@ 5176.900	33.66	8.40	39.27	100.45	103.24	---	---	Peak

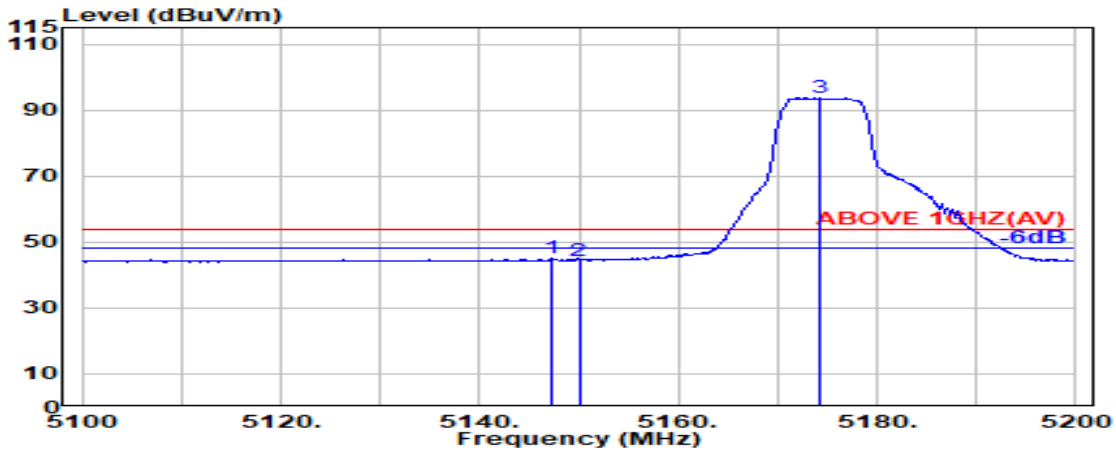


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.49	8.37	39.27	42.42	45.01	54.00	8.99	Average
5150.000	33.50	8.37	39.27	41.87	44.47	54.00	9.53	Average
@ 5174.300	33.65	8.40	39.27	90.88	93.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

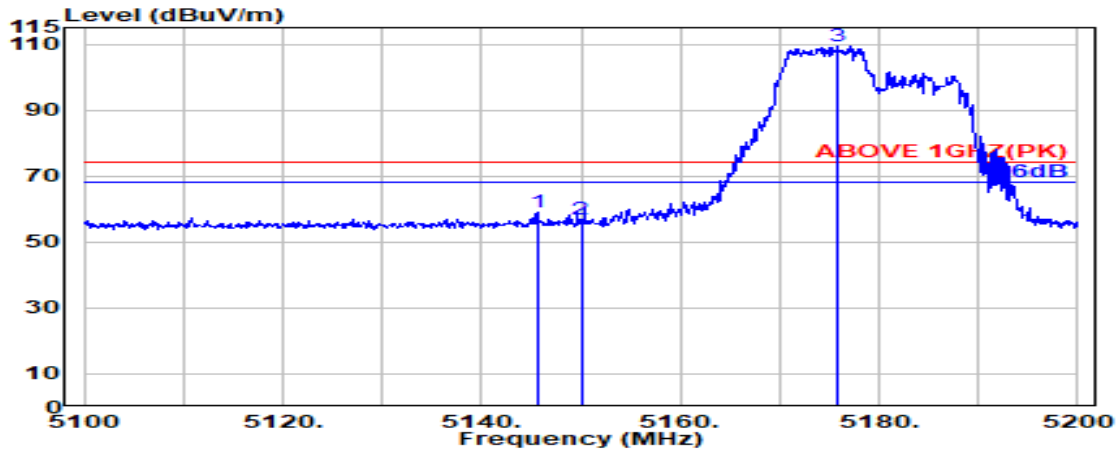

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.49	8.37	39.27	56.24	58.83	74.00	15.17	Peak
5150.000	33.50	8.37	39.27	54.27	56.87	74.00	17.13	Peak
@ 5175.800	33.66	8.40	39.27	106.44	109.23	---	---	Peak

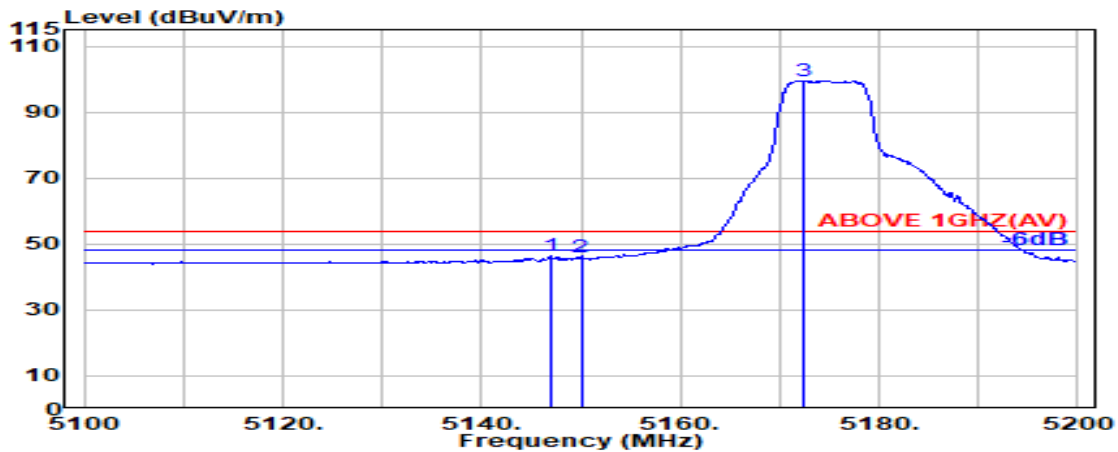


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.49	8.37	39.27	43.72	46.31	54.00	7.69	Average
5150.000	33.50	8.37	39.27	43.43	46.03	54.00	7.97	Average
@ 5172.300	33.63	8.40	39.27	96.81	99.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

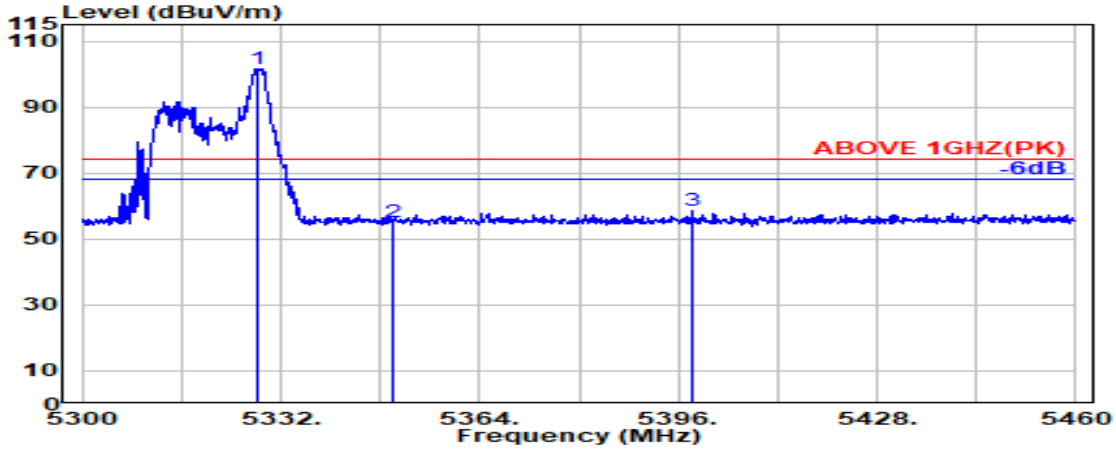

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.26	98.71	101.75	---	---	Peak
5350.000	33.70	8.57	39.26	51.91	54.92	74.00	19.08	Peak
5398.200	33.89	8.62	39.26	55.20	58.46	74.00	15.54	Peak

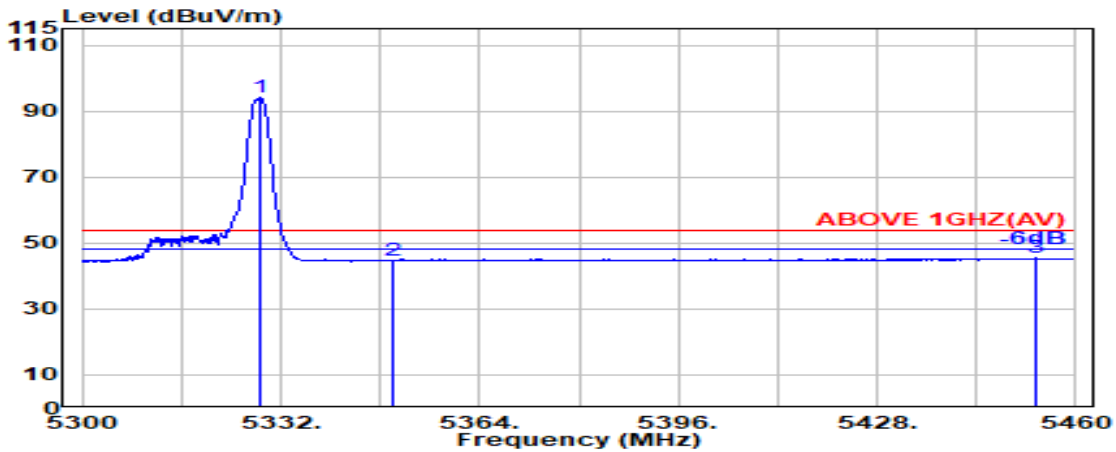


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.800	33.74	8.55	39.26	90.92	93.96	---	---	Average
5350.000	33.70	8.57	39.26	41.71	44.72	54.00	9.28	Average
5453.600	34.01	8.67	39.25	41.98	45.41	54.00	8.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

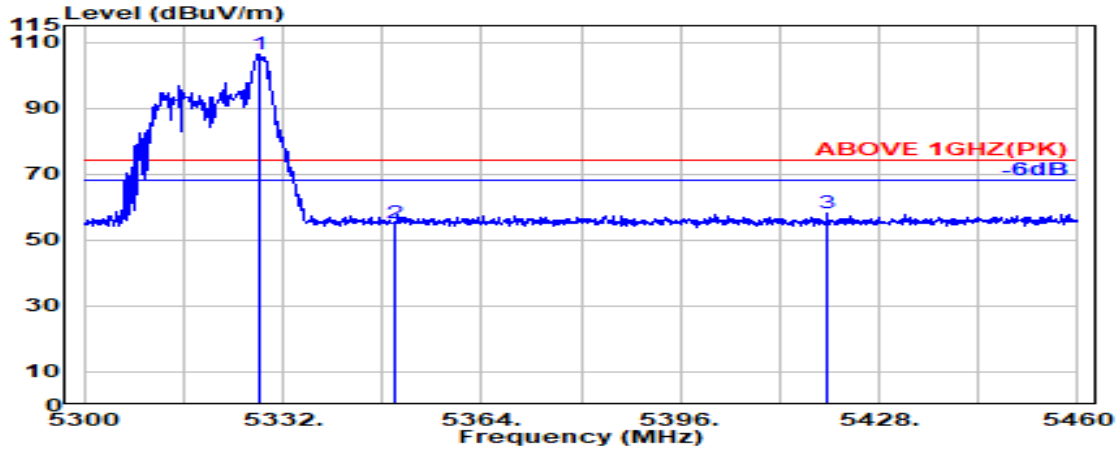

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.26	103.23	106.26	---	---	Peak
5350.000	33.70	8.57	39.26	51.90	54.91	74.00	19.09	Peak
5419.500	33.94	8.64	39.25	54.70	58.02	74.00	15.98	Peak

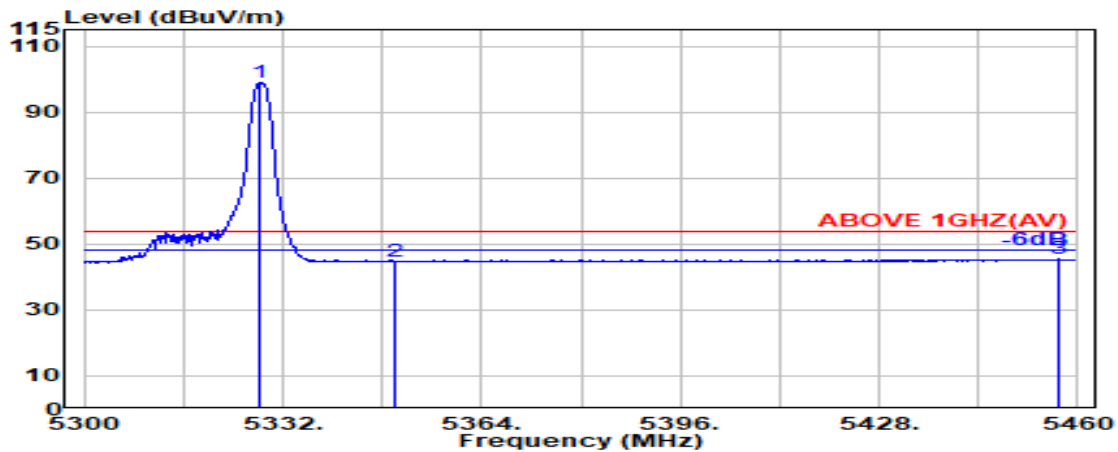


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.74	8.55	39.26	96.00	99.03	---	---	Average
5350.000	33.70	8.57	39.26	41.71	44.72	54.00	9.28	Average
5456.800	34.01	8.68	39.25	41.96	45.39	54.00	8.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

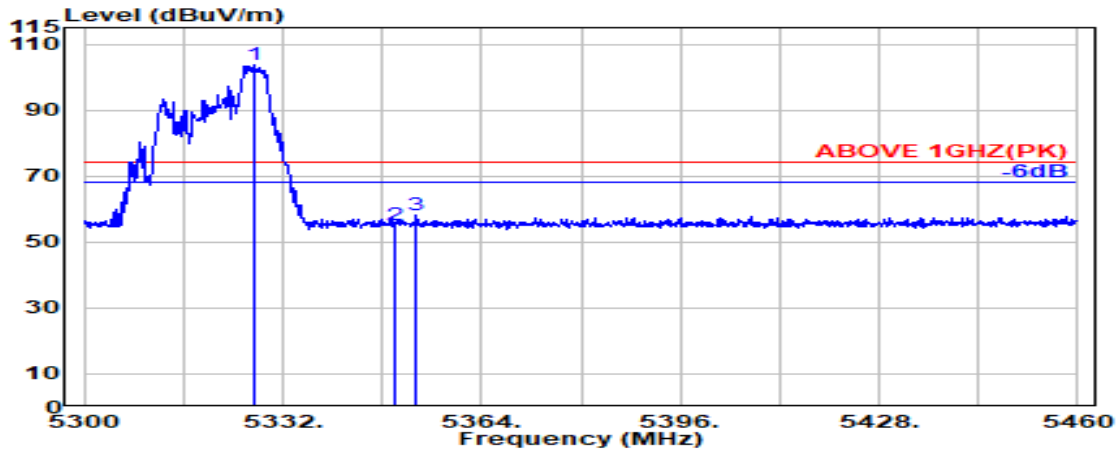

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.400	33.75	8.55	39.26	100.59	103.63	---	---	Peak
5350.000	33.70	8.57	39.26	52.00	55.01	74.00	18.99	Peak
5353.500	33.71	8.58	39.26	55.00	58.03	74.00	15.97	Peak

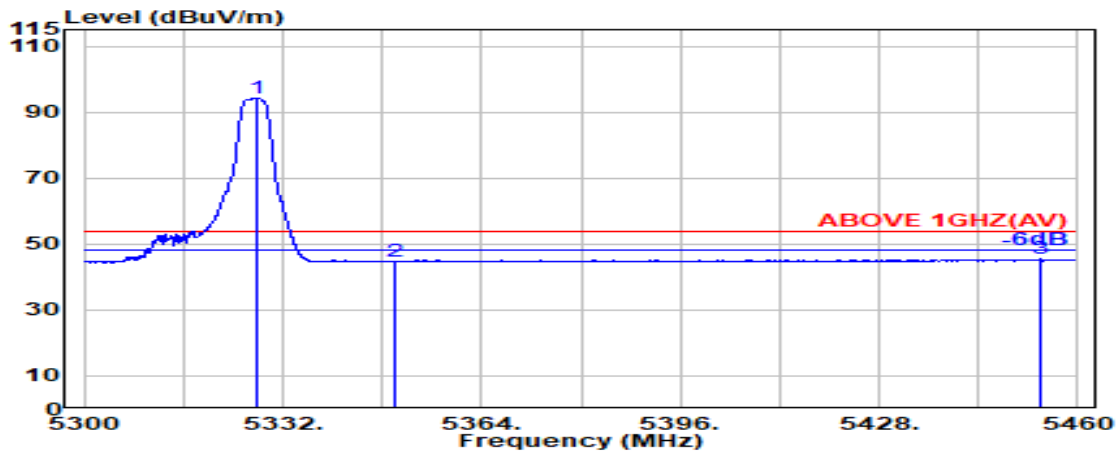


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	33.74	8.55	39.26	91.35	94.38	---	---	Average
5350.000	33.70	8.57	39.26	41.58	44.60	54.00	9.40	Average
5454.100	34.01	8.67	39.25	41.97	45.40	54.00	8.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

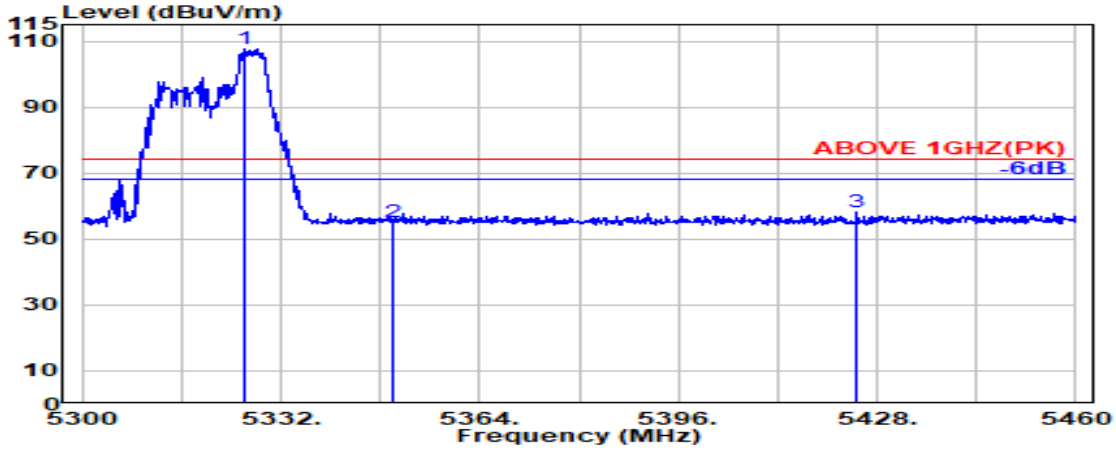

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.000	33.75	8.55	39.26	104.50	107.53	---	---	Peak
5350.000	33.70	8.57	39.26	51.90	54.91	74.00	19.09	Peak
5424.700	33.95	8.64	39.25	54.84	58.18	74.00	15.82	Peak

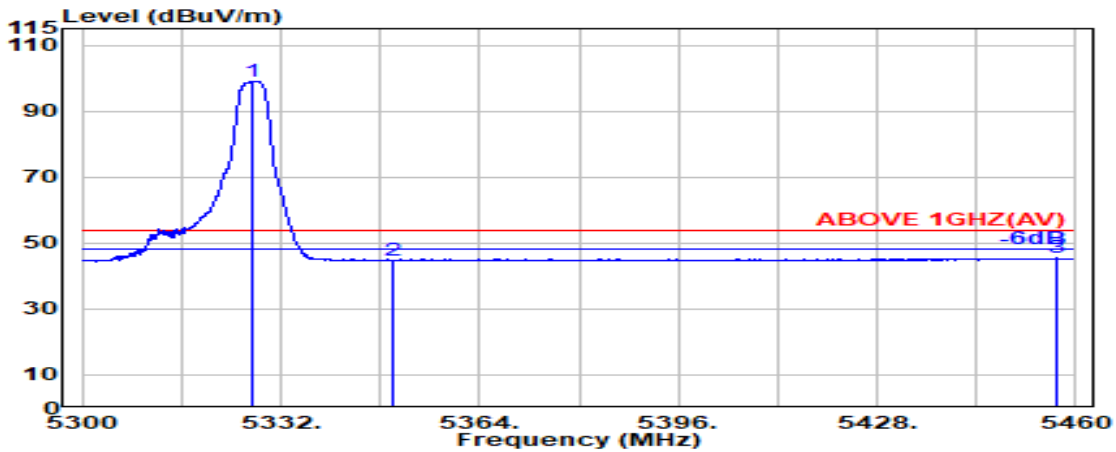


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.400	33.75	8.55	39.26	95.90	98.94	---	---	Average
5350.000	33.70	8.57	39.26	41.63	44.64	54.00	9.36	Average
5456.900	34.01	8.68	39.25	42.06	45.50	54.00	8.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

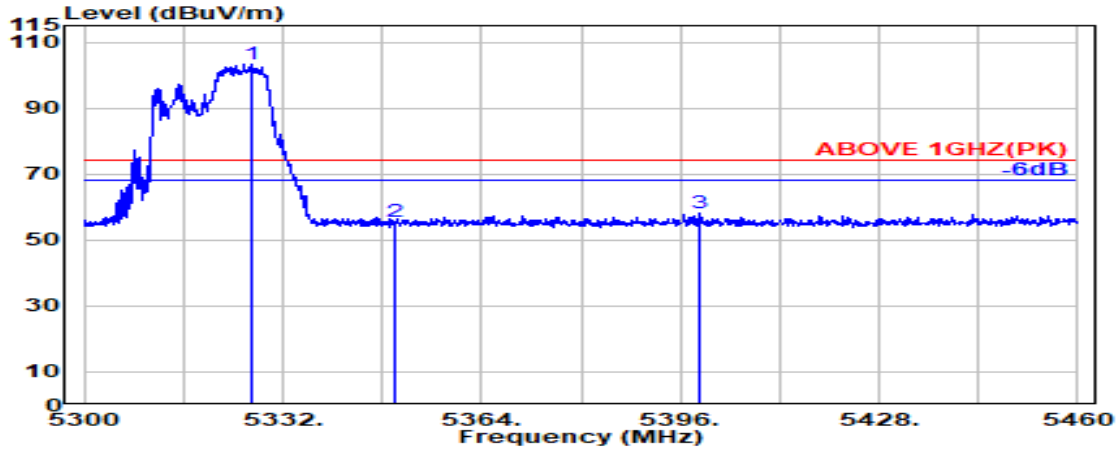

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.75	8.55	39.26	100.24	103.28	---	---	Peak
5350.000	33.70	8.57	39.26	52.68	55.70	74.00	18.30	Peak
5399.000	33.90	8.62	39.26	54.68	57.94	74.00	16.06	Peak

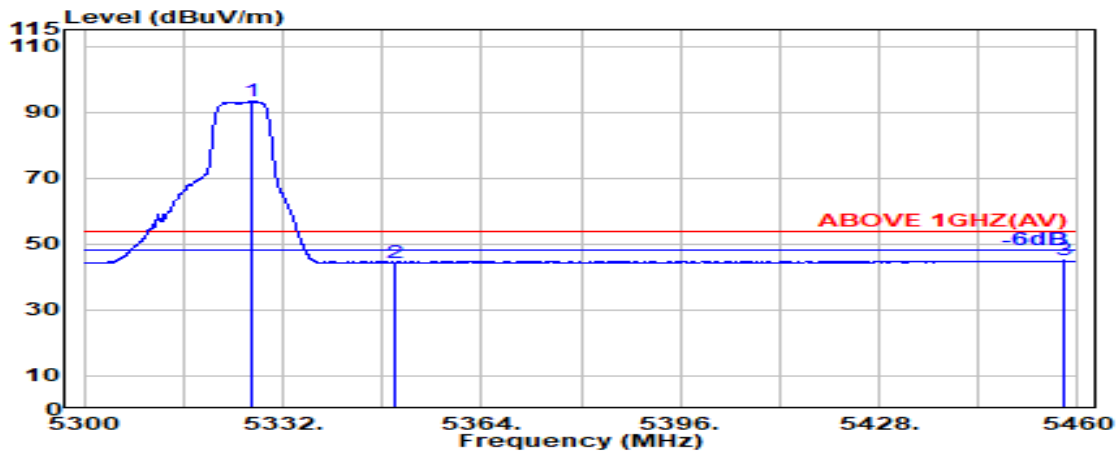


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.900	33.75	8.55	39.26	90.33	93.36	---	---	Average
5350.000	33.70	8.57	39.26	41.47	44.48	54.00	9.52	Average
5457.800	34.02	8.68	39.25	41.48	44.92	54.00	9.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

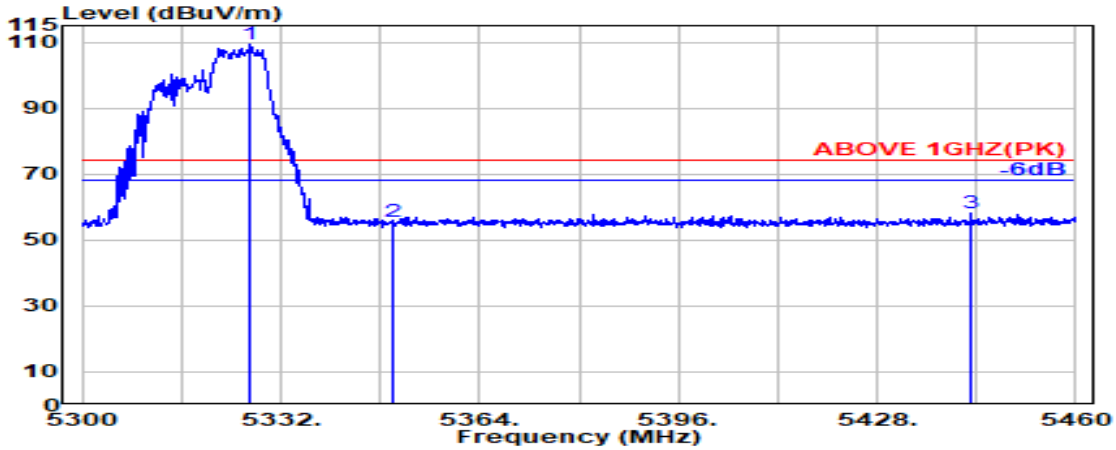

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.75	8.55	39.26	106.19	109.22	---	---	Peak
5350.000	33.70	8.57	39.26	52.50	55.51	74.00	18.49	Peak
5443.000	33.99	8.66	39.25	54.72	58.11	74.00	15.89	Peak

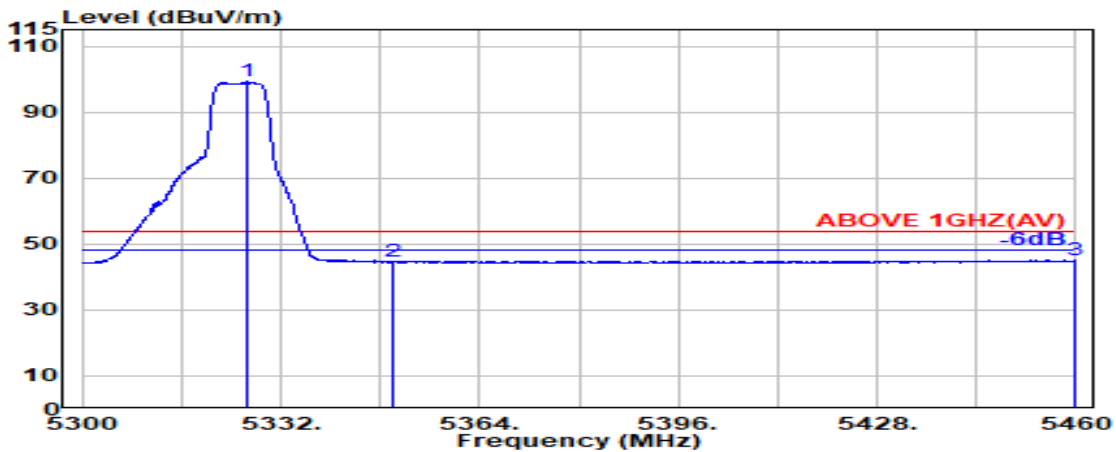


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.500	33.75	8.55	39.26	96.16	99.20	---	---	Average
5350.000	33.70	8.57	39.26	41.51	44.52	54.00	9.48	Average
5459.700	34.02	8.68	39.25	41.61	45.06	54.00	8.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

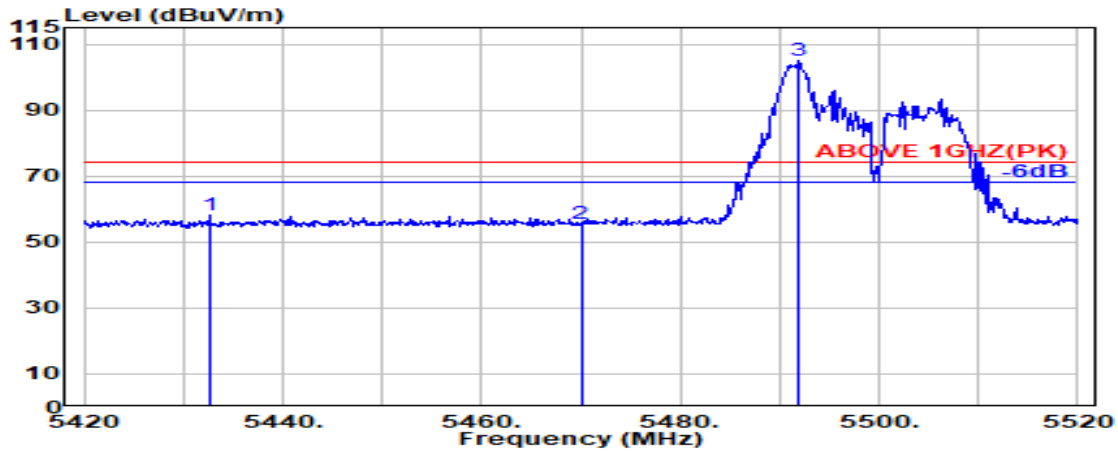

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.700	33.97	8.65	39.25	54.73	58.09	74.00	15.91	Peak
5470.000	34.04	8.69	39.25	52.17	55.65	74.00	18.35	Peak
@ 5492.000	34.08	8.71	39.25	101.31	104.85	---	---	Peak

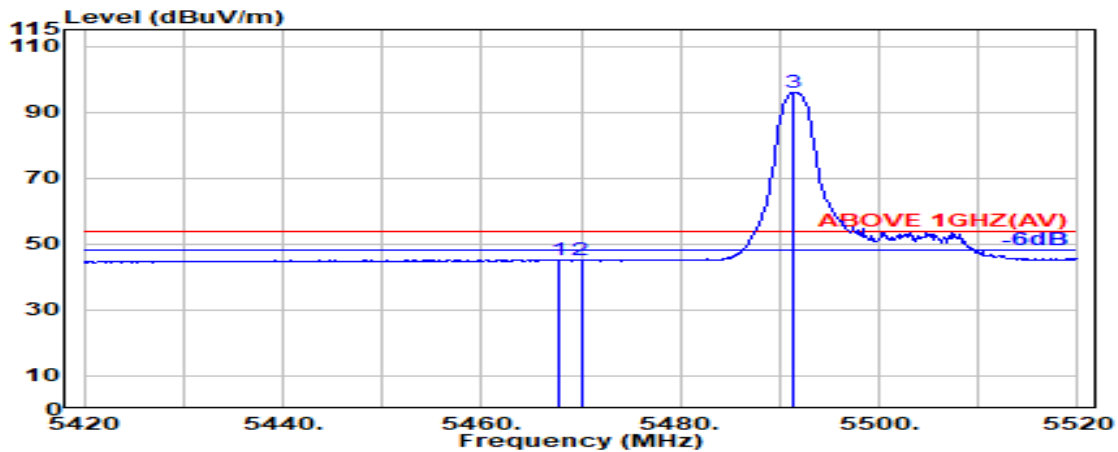


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.25	41.77	45.24	54.00	8.76	Average
5470.000	34.04	8.69	39.25	41.58	45.06	54.00	8.94	Average
@ 5491.400	34.08	8.71	39.25	92.42	95.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

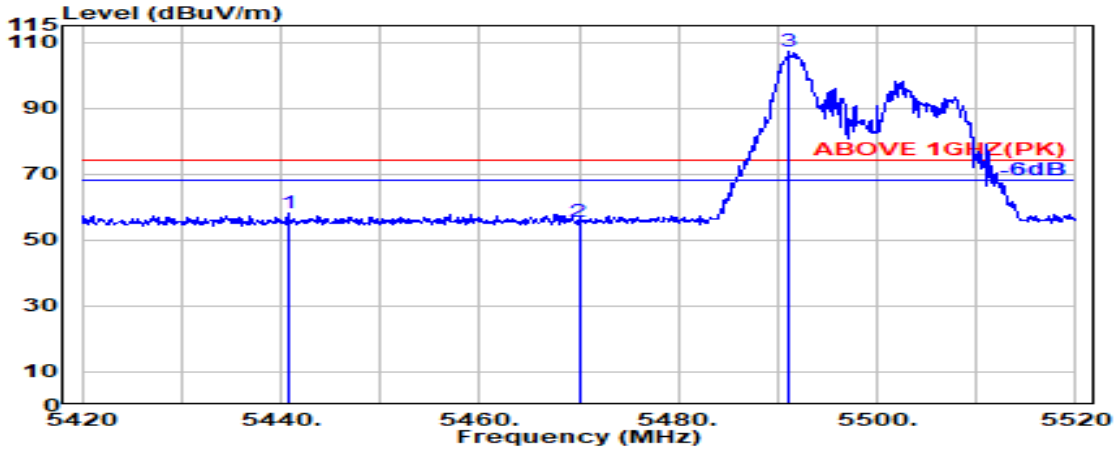

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.700	33.98	8.66	39.25	54.60	57.99	74.00	16.01	Peak
5470.000	34.04	8.69	39.25	52.16	55.63	74.00	18.37	Peak
@ 5491.100	34.08	8.71	39.25	103.62	107.16	---	---	Peak

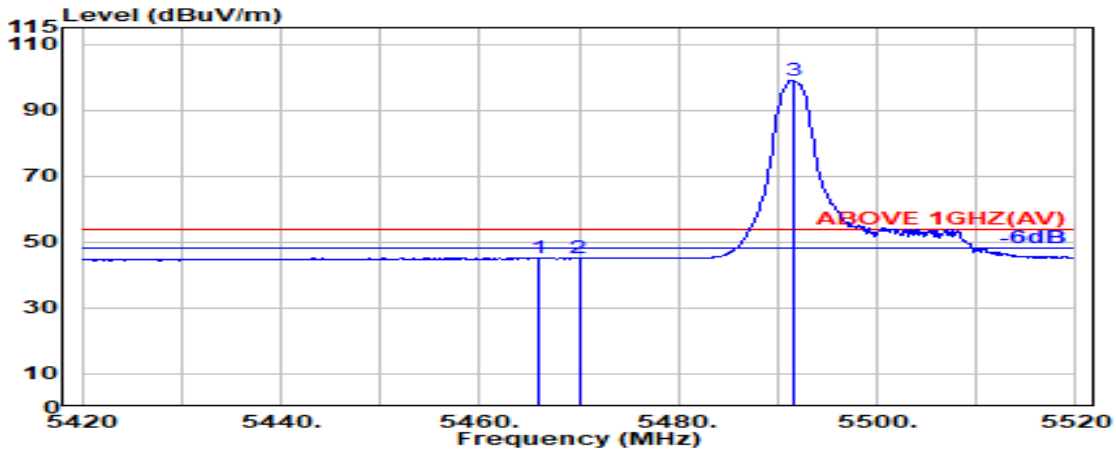


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.03	8.68	39.25	41.73	45.20	54.00	8.80	Average
5470.000	34.04	8.69	39.25	41.58	45.06	54.00	8.94	Average
@ 5491.500	34.08	8.71	39.25	95.48	99.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

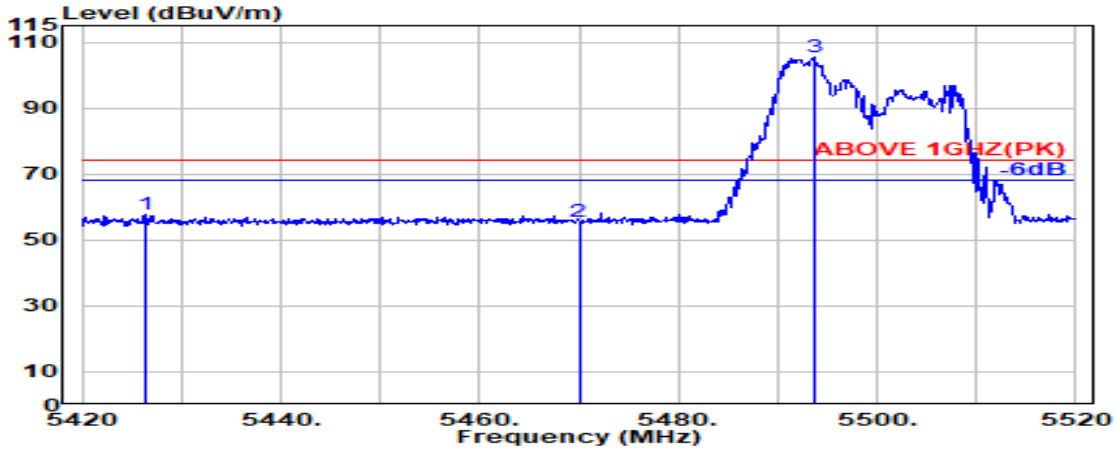

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.300	33.95	8.65	39.25	54.16	57.50	74.00	16.50	Peak
5470.000	34.04	8.69	39.25	52.15	55.63	74.00	18.37	Peak
@ 5493.800	34.09	8.71	39.25	101.86	105.41	---	---	Peak

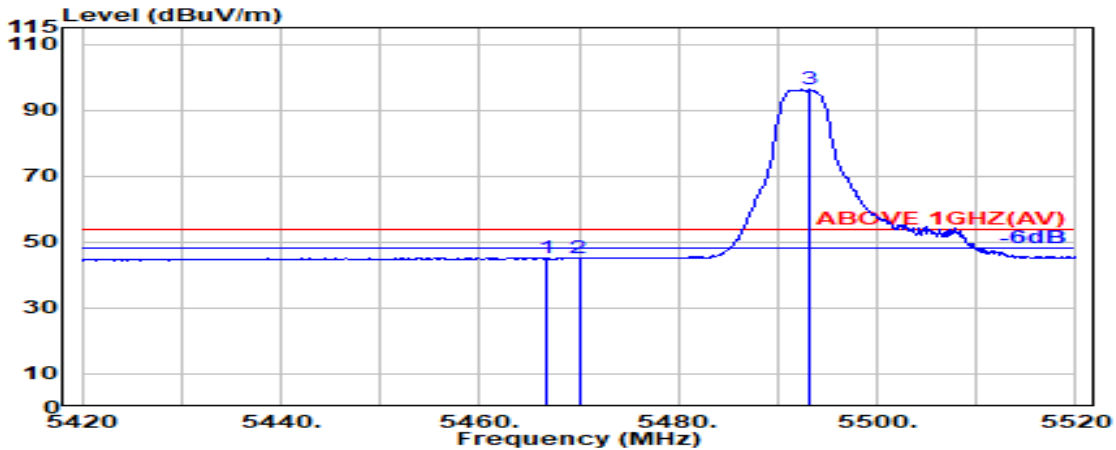


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.03	8.69	39.25	41.71	45.18	54.00	8.82	Average
5470.000	34.04	8.69	39.25	41.58	45.05	54.00	8.95	Average
@ 5493.200	34.09	8.71	39.25	92.67	96.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

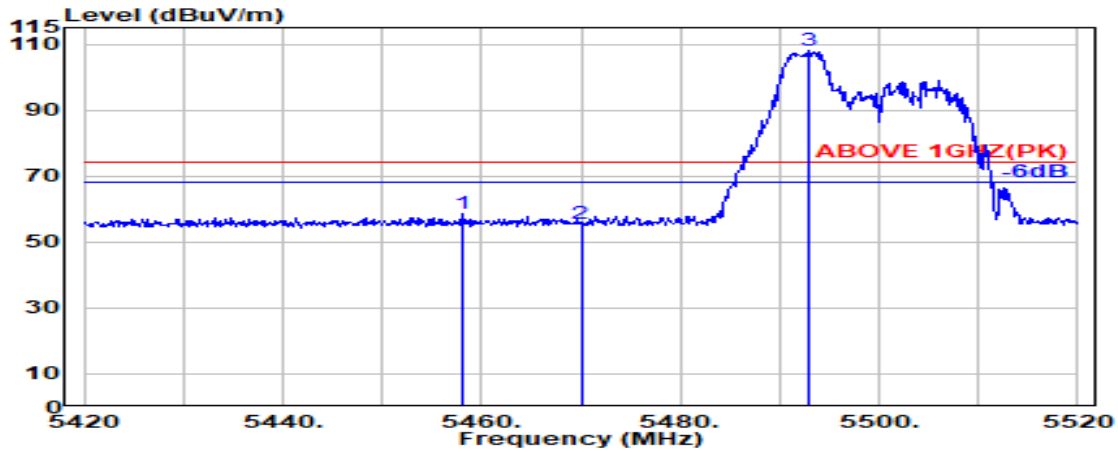

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.200	34.02	8.68	39.25	55.09	58.53	74.00	15.47	Peak
5470.000	34.04	8.69	39.25	52.14	55.61	74.00	18.39	Peak
@ 5493.000	34.09	8.71	39.25	104.30	107.85	---	---	Peak

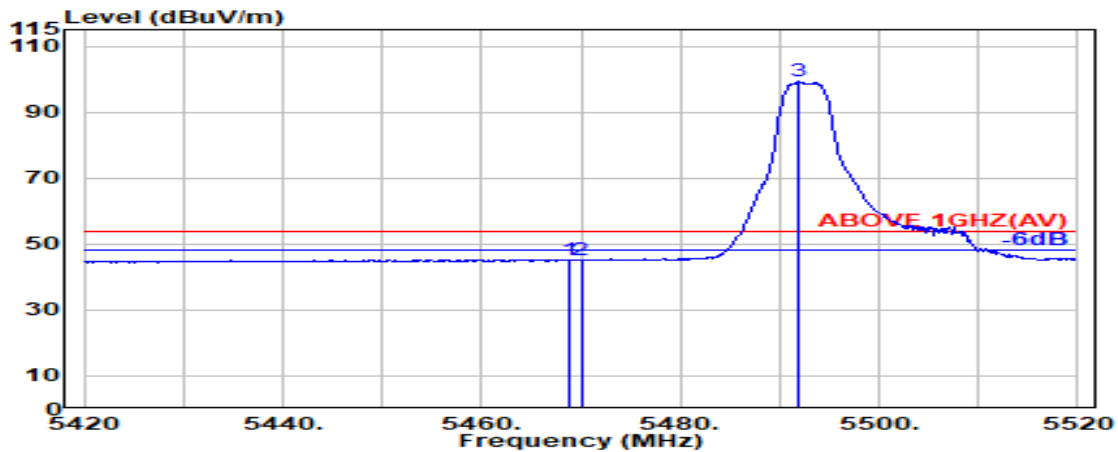


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.25	41.87	45.35	54.00	8.65	Average
5470.000	34.04	8.69	39.25	41.57	45.05	54.00	8.95	Average
@ 5491.900	34.08	8.71	39.25	95.64	99.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

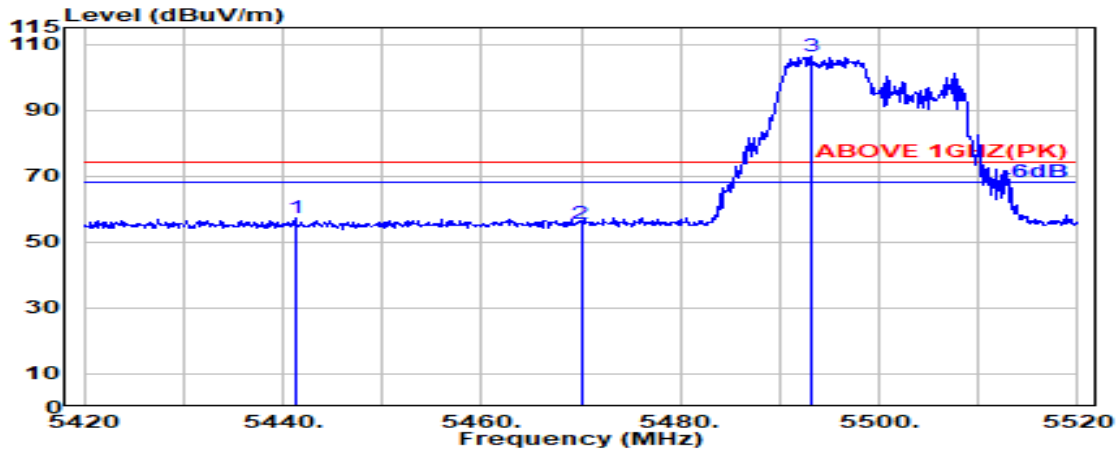

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5441.200	33.98	8.66	39.25	53.77	57.16	74.00	16.84	Peak
5470.000	34.04	8.69	39.25	52.20	55.67	74.00	18.33	Peak
@ 5493.100	34.09	8.71	39.25	102.68	106.23	---	---	Peak

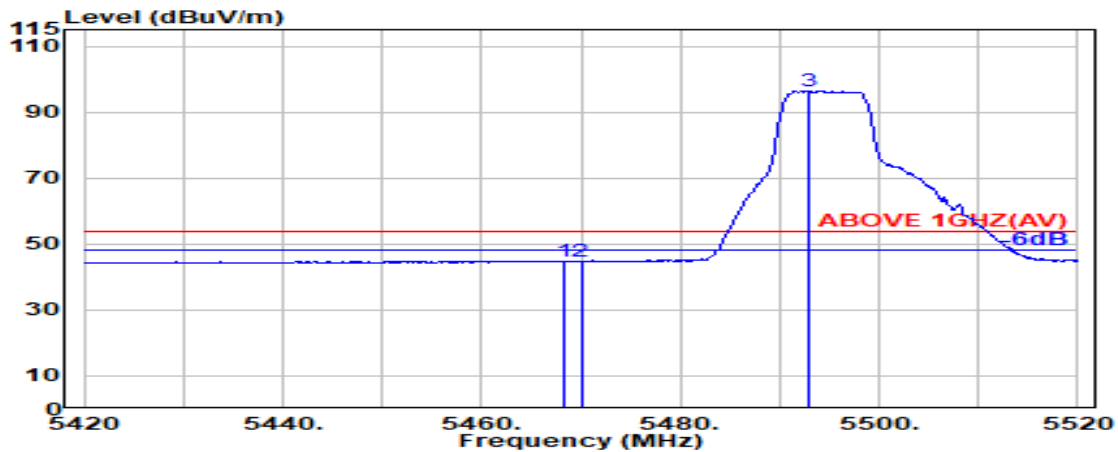


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.25	41.37	44.84	54.00	9.16	Average
5470.000	34.04	8.69	39.25	41.34	44.81	54.00	9.19	Average
@ 5492.900	34.09	8.71	39.25	92.92	96.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

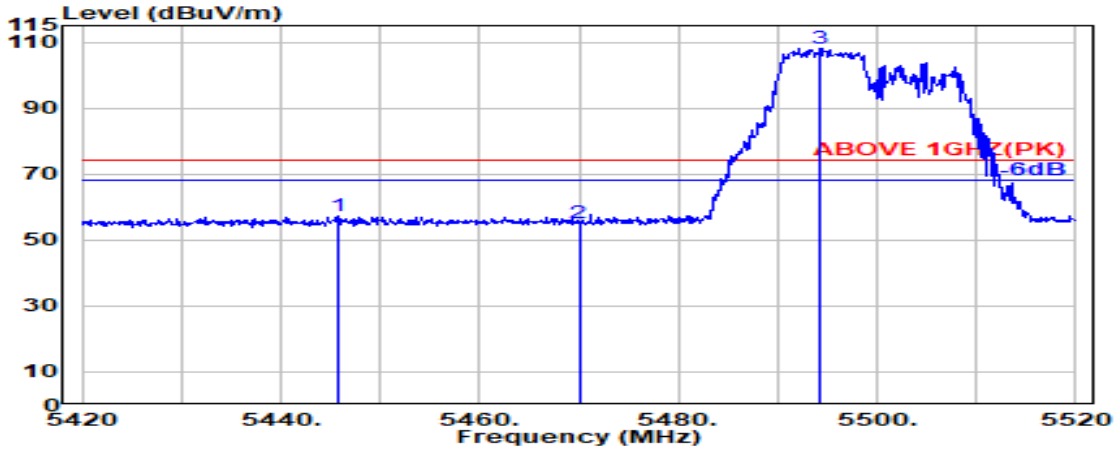

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.700	33.99	8.66	39.25	54.09	57.50	74.00	16.50	Peak
5470.000	34.04	8.69	39.25	51.76	55.24	74.00	18.76	Peak
@ 5494.300	34.09	8.71	39.25	104.65	108.20	---	---	Peak

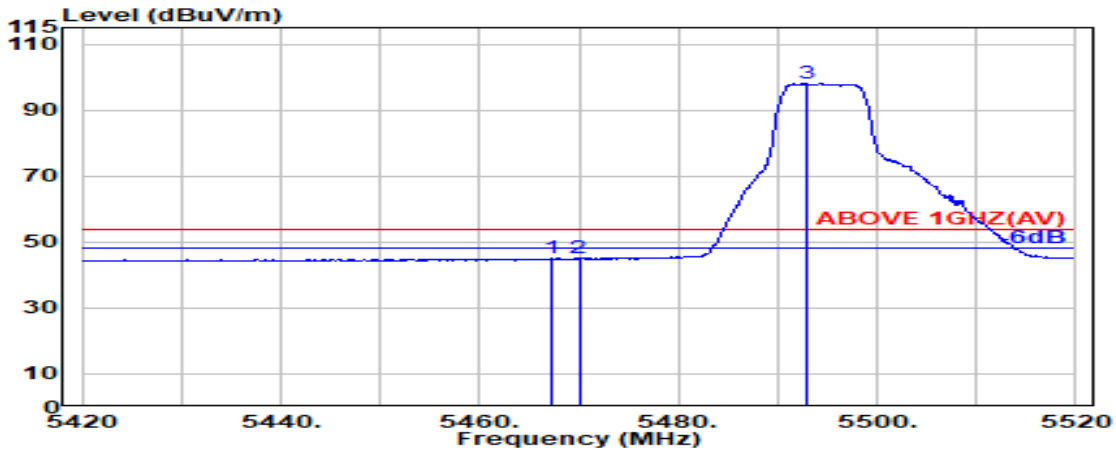


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.03	8.69	39.25	41.47	44.94	54.00	9.06	Average
5470.000	34.04	8.69	39.25	41.57	45.04	54.00	8.96	Average
@ 5493.000	34.09	8.71	39.25	94.52	98.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

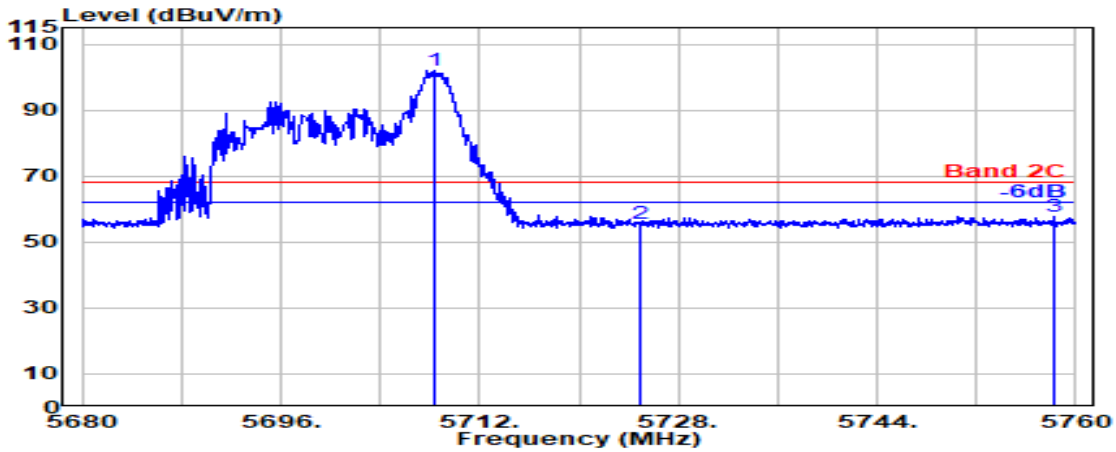

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.400	33.60	8.91	39.29	98.67	101.89	---	---	Peak
5725.000	33.60	8.93	39.29	52.39	55.63	68.20	12.57	Peak
5758.250	33.63	8.96	39.30	54.33	57.62	68.20	10.58	Peak

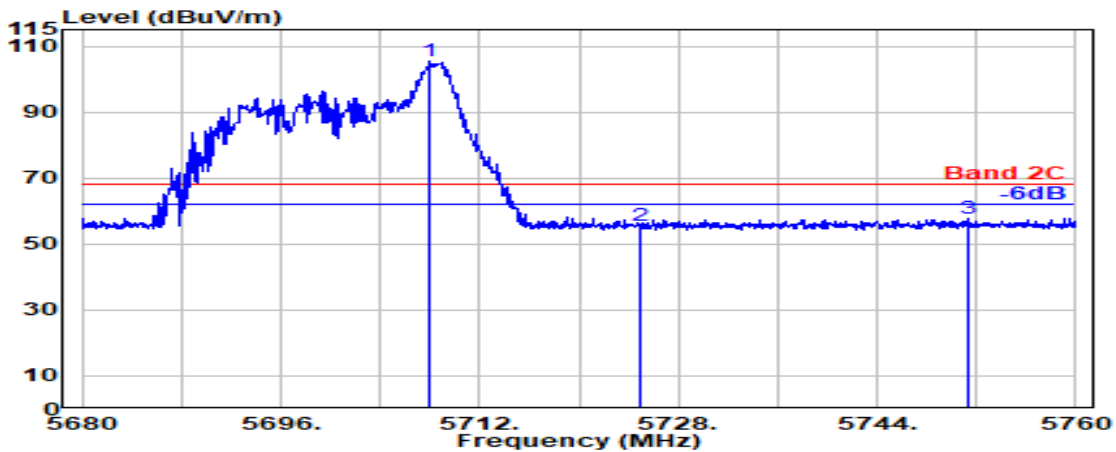


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.950	33.60	8.91	39.29	102.03	105.25	---	---	Peak
5725.000	33.60	8.93	39.29	52.34	55.57	68.20	12.63	Peak
5751.300	33.61	8.95	39.30	54.42	57.68	68.20	10.52	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

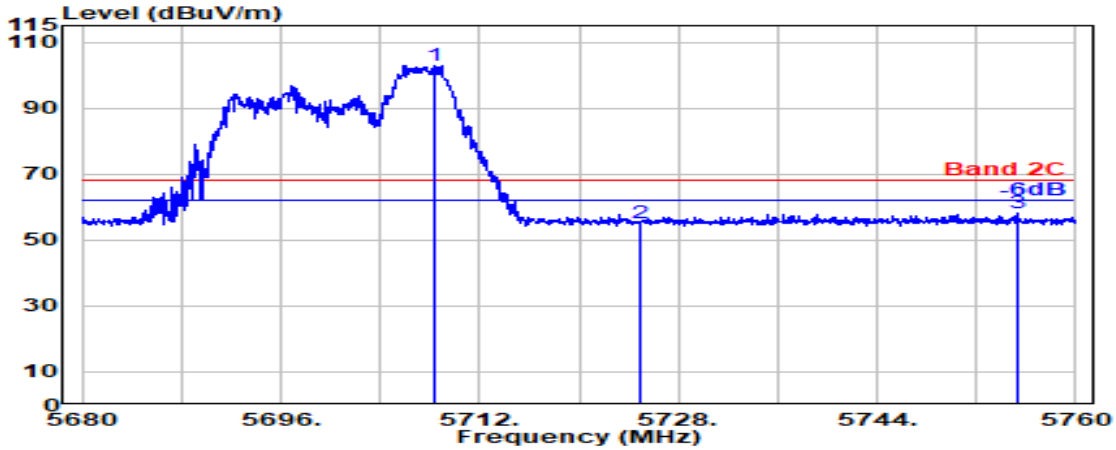

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.450	33.60	8.91	39.29	99.63	102.85	---	---	Peak
5725.000	33.60	8.93	39.29	52.06	55.29	68.20	12.91	Peak
5755.250	33.62	8.95	39.30	54.71	57.99	68.20	10.21	Peak

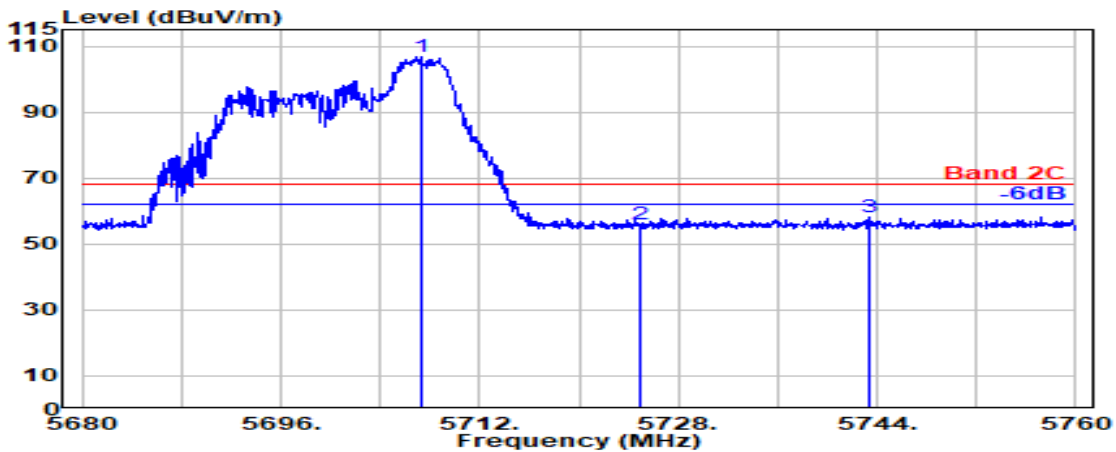


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.250	33.60	8.91	39.29	103.51	106.73	---	---	Peak
5725.000	33.60	8.93	39.29	52.80	56.04	68.20	12.16	Peak
5743.400	33.60	8.94	39.29	54.84	58.09	68.20	10.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

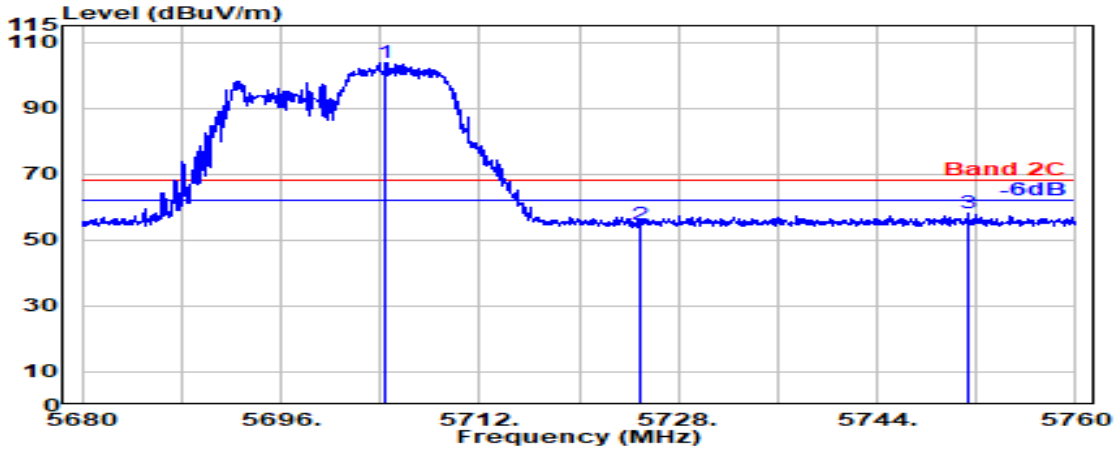

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.450	33.60	8.91	39.29	100.67	103.89	---	---	Peak
5725.000	33.60	8.93	39.29	51.57	54.80	68.20	13.40	Peak
5751.300	33.61	8.95	39.30	55.04	58.29	68.20	9.91	Peak

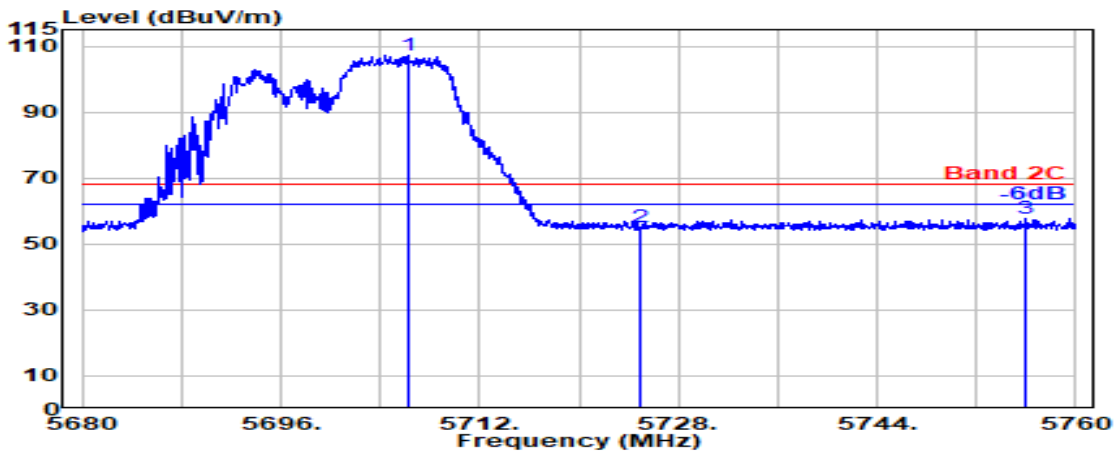


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.200	33.60	8.91	39.29	103.84	107.06	---	---	Peak
5725.000	33.60	8.93	39.29	51.70	54.94	68.20	13.26	Peak
5755.900	33.62	8.95	39.30	54.46	57.74	68.20	10.46	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

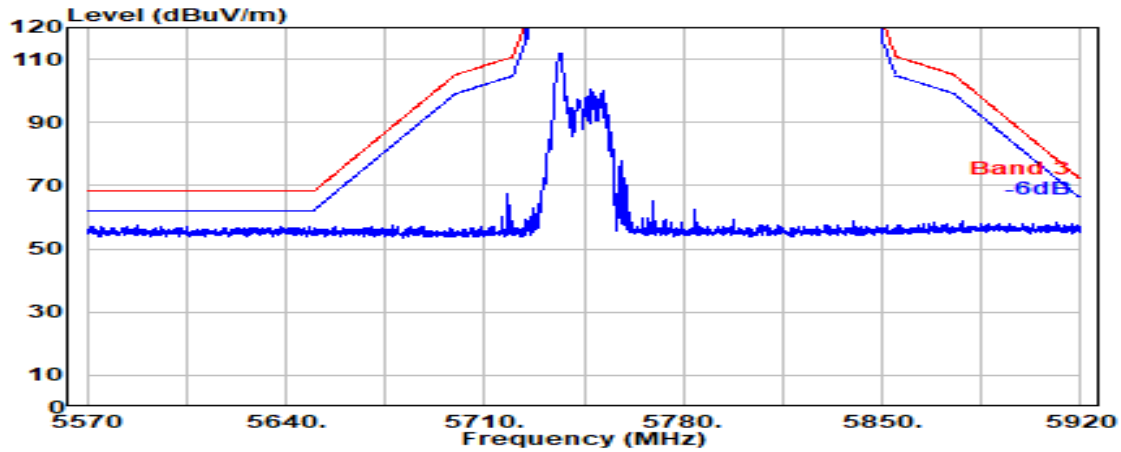


Antenna at Vertical Polarization

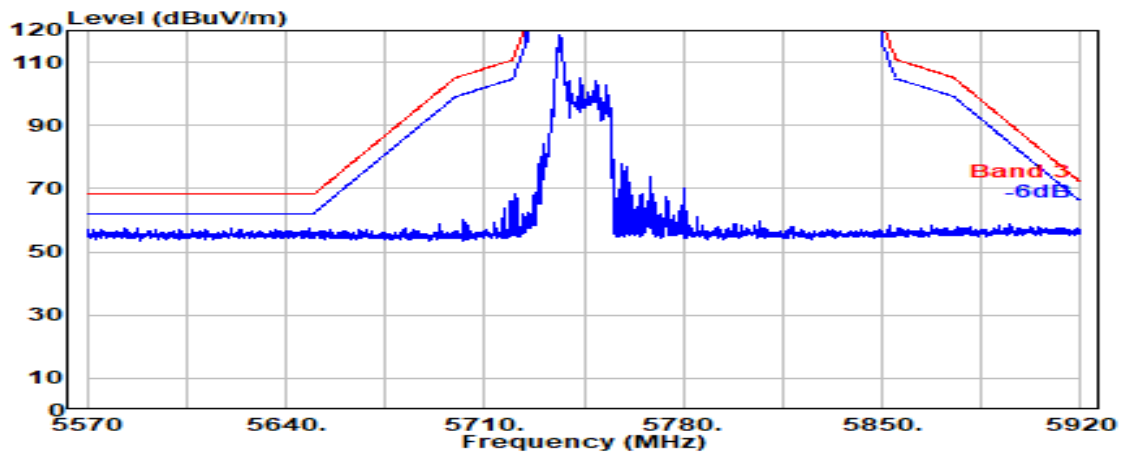


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

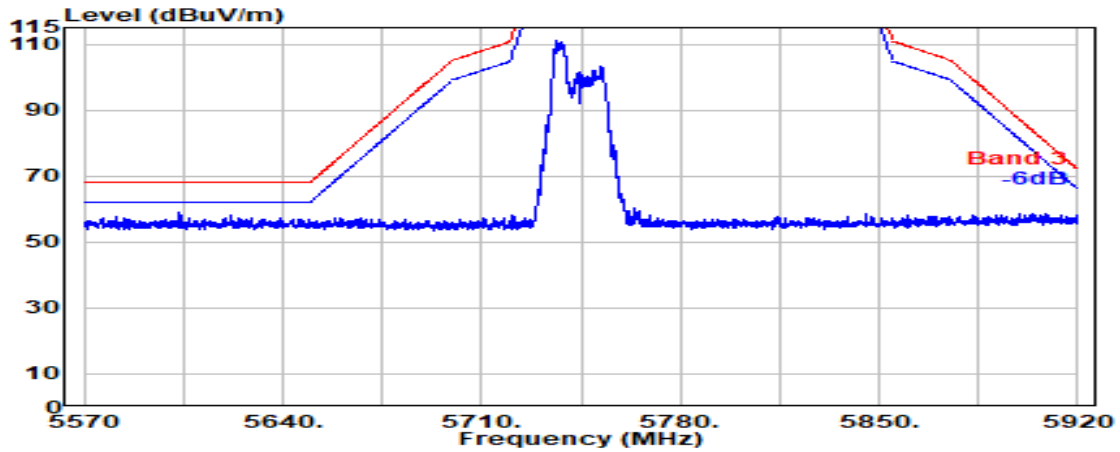


Antenna at Vertical Polarization

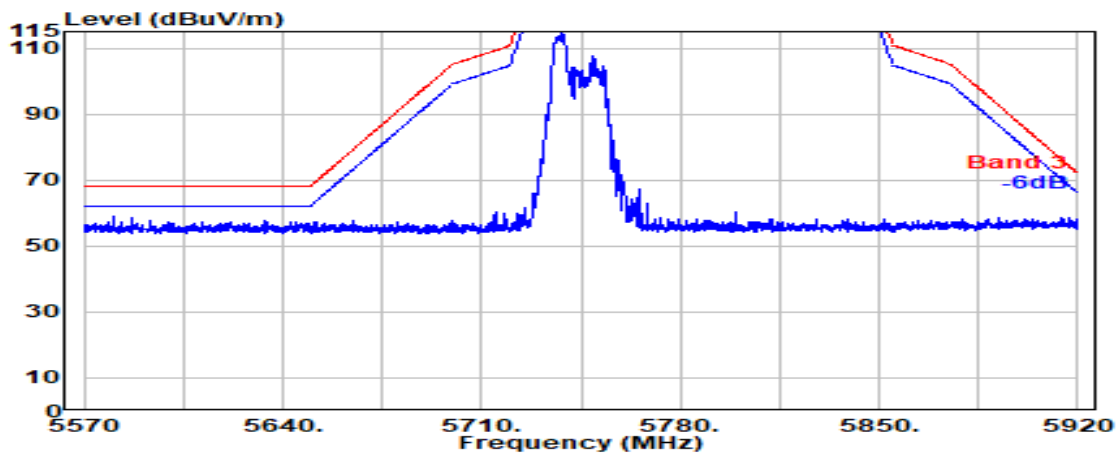


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

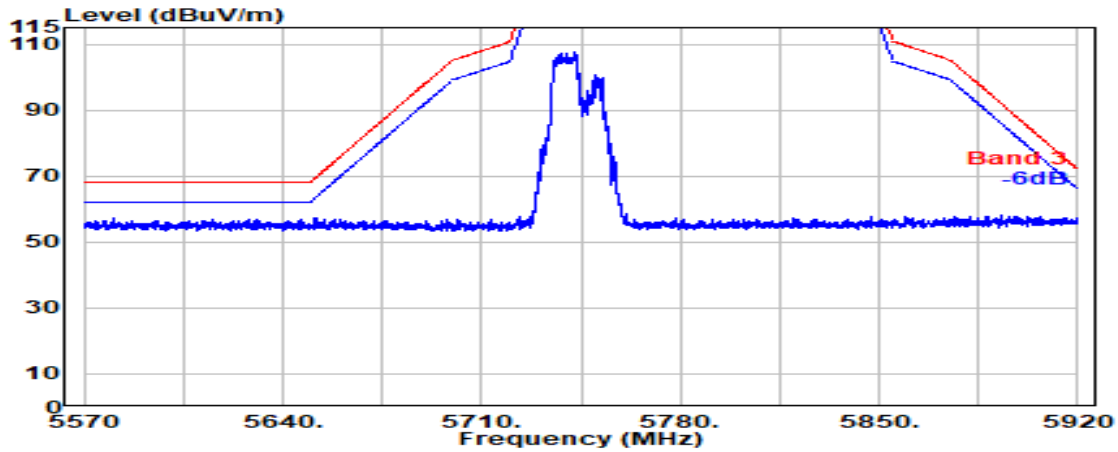


Antenna at Vertical Polarization

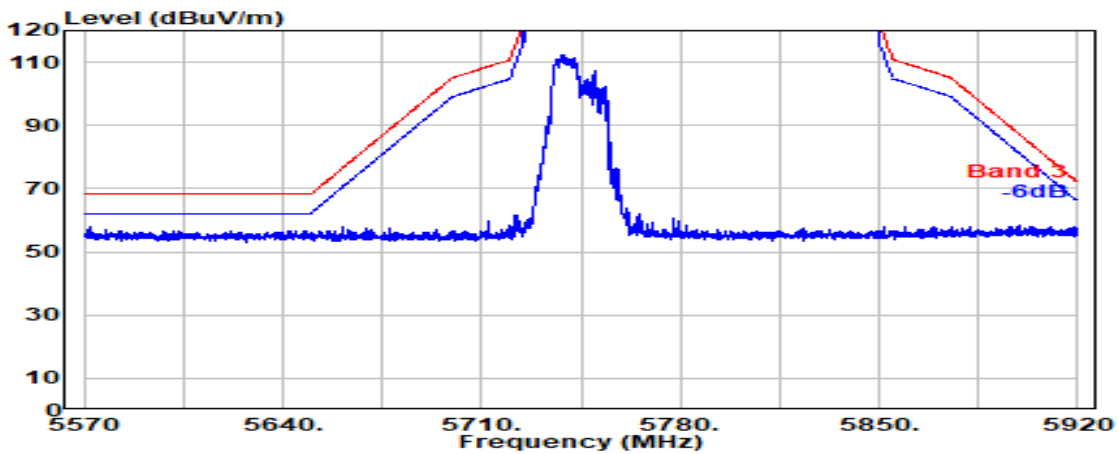


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

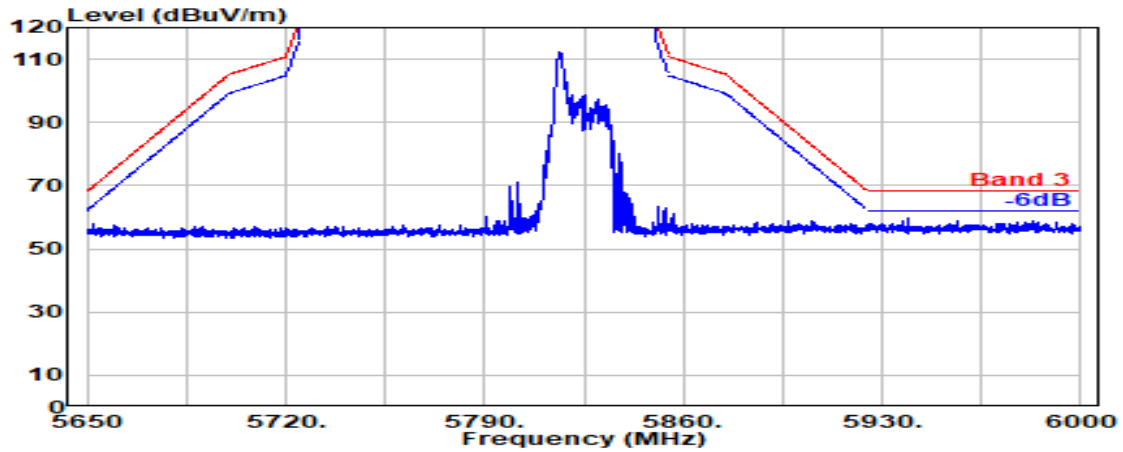


Antenna at Vertical Polarization

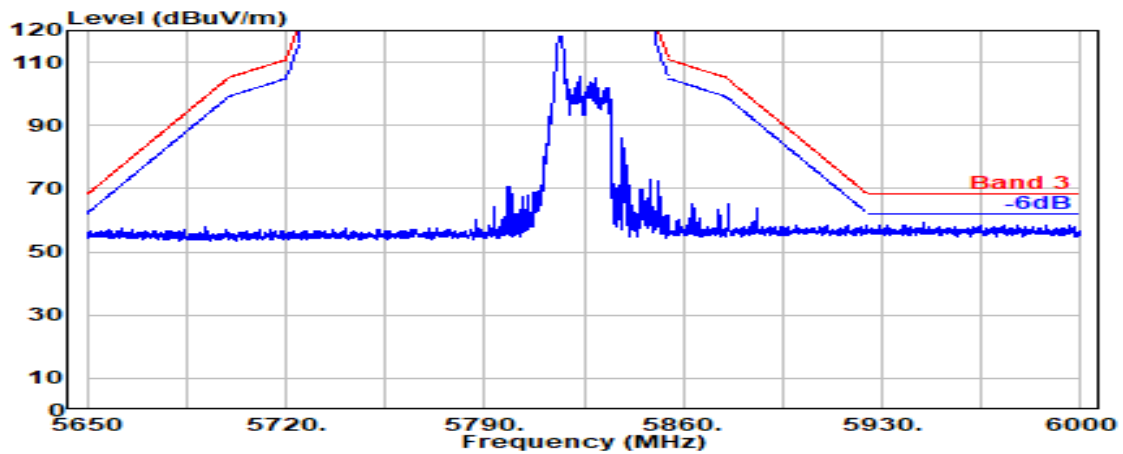


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

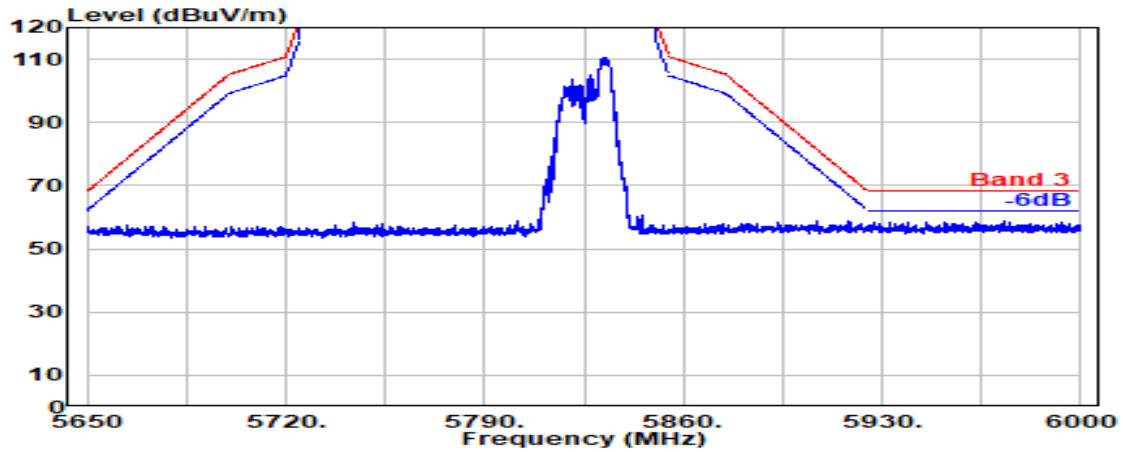


Antenna at Vertical Polarization

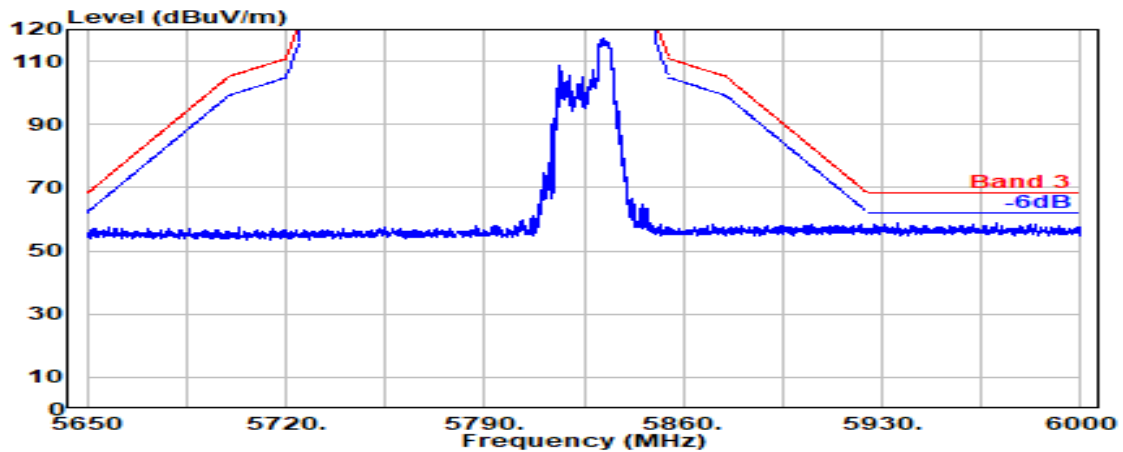


Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

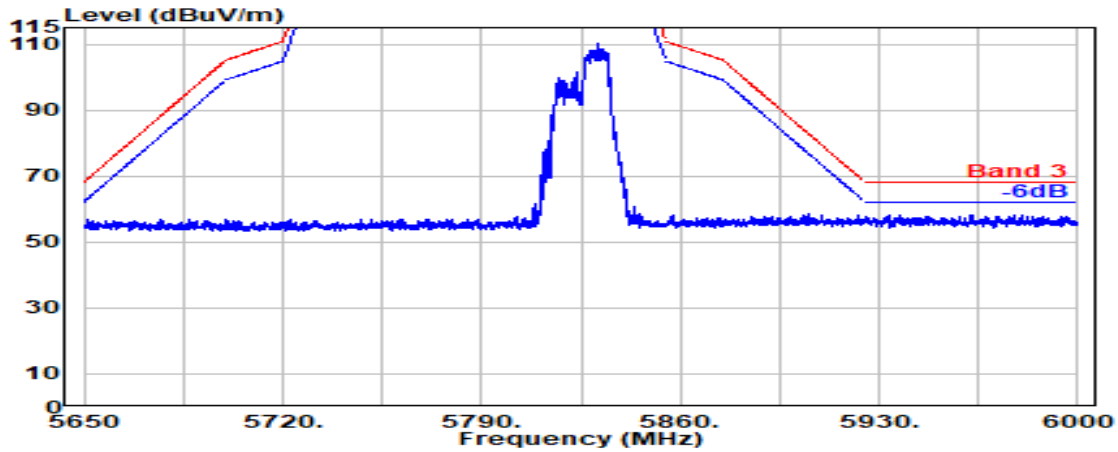

Antenna at Vertical Polarization

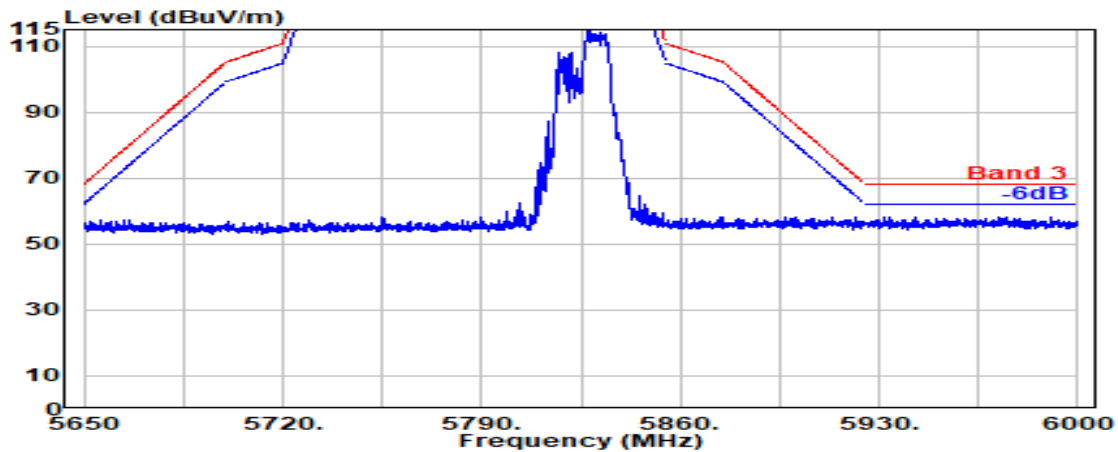


Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

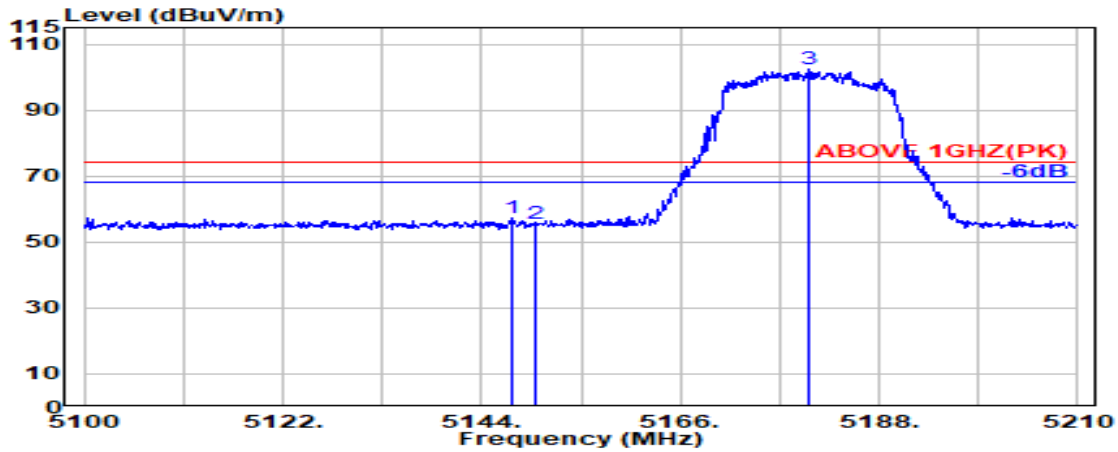

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.49	8.37	39.27	54.86	57.45	74.00	16.55	Peak
5150.000	33.50	8.37	39.27	52.76	55.37	74.00	18.63	Peak
@ 5180.300	33.68	8.40	39.27	99.50	102.32	---	---	Peak

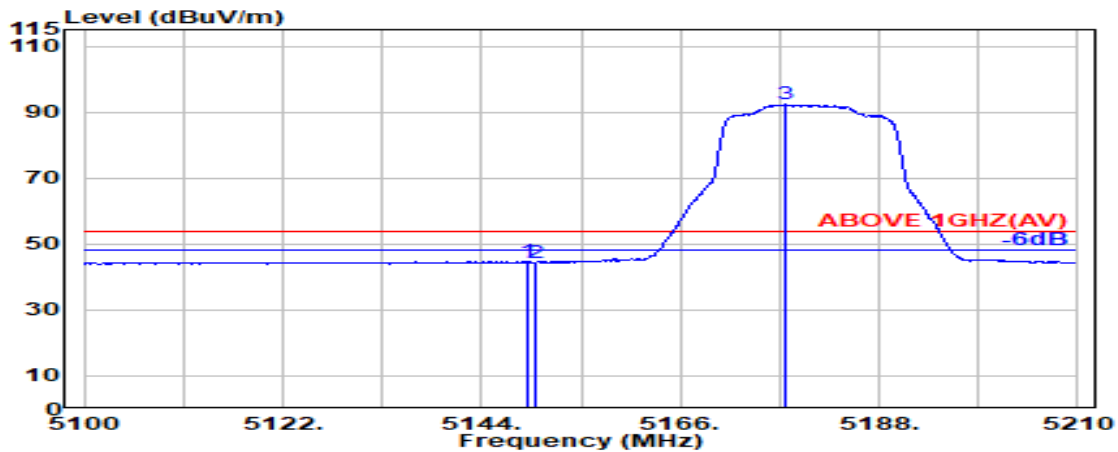


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.27	42.05	44.65	54.00	9.35	Average
5150.000	33.50	8.37	39.27	41.86	44.46	54.00	9.54	Average
@ 5177.600	33.67	8.40	39.27	89.44	92.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

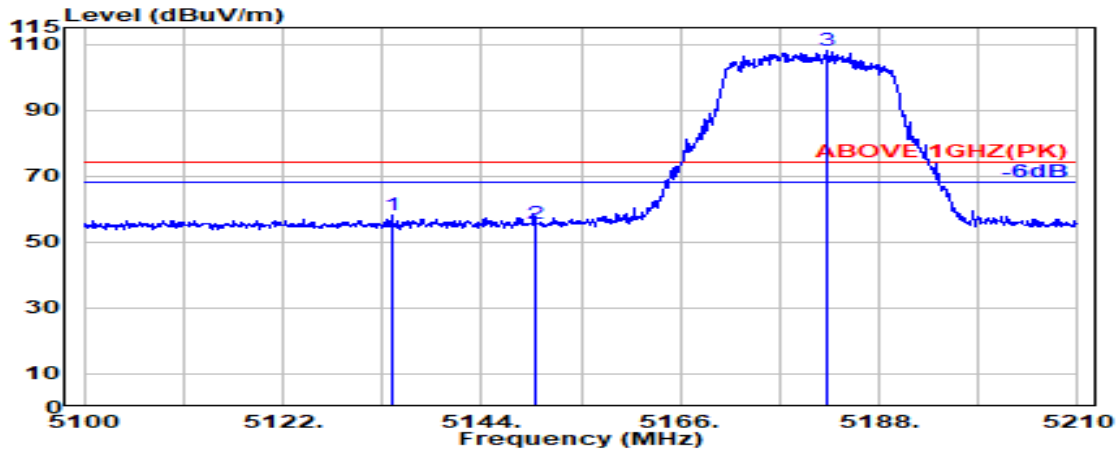

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.000	33.47	8.36	39.27	55.50	58.05	74.00	15.95	Peak
5150.000	33.50	8.37	39.27	53.04	55.64	74.00	18.36	Peak
@ 5182.200	33.69	8.41	39.27	105.20	108.03	---	---	Peak

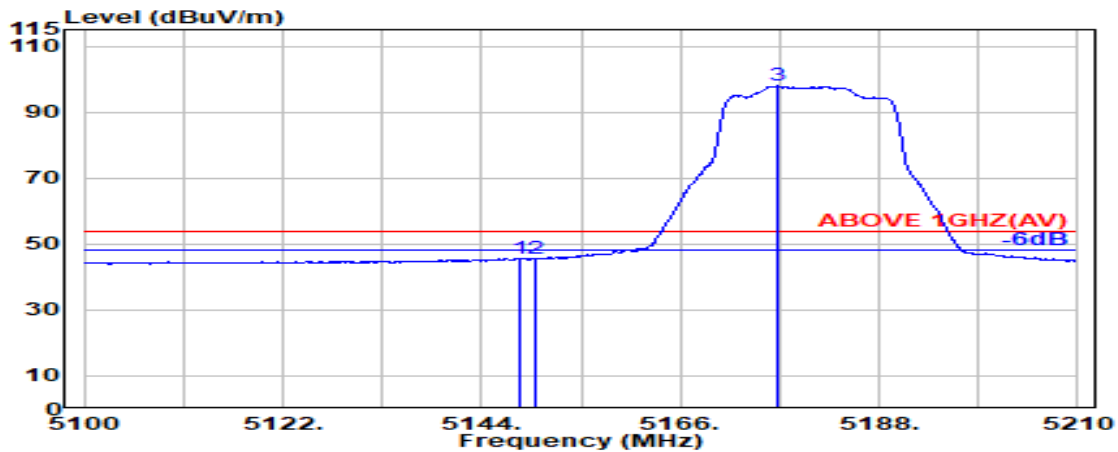


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	33.50	8.37	39.27	43.07	45.66	54.00	8.34	Average
5150.000	33.50	8.37	39.27	42.96	45.56	54.00	8.44	Average
@ 5176.900	33.66	8.40	39.27	95.07	97.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

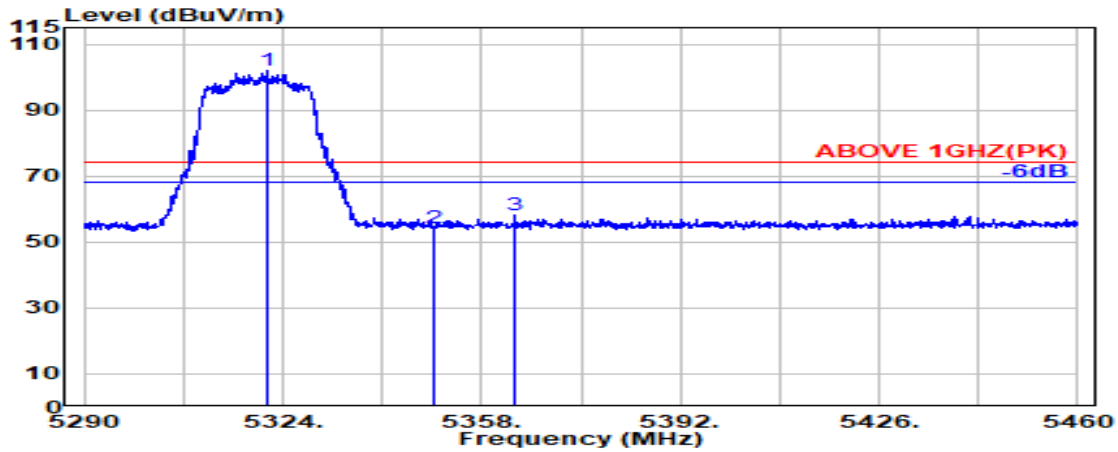

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.400	33.76	8.54	39.26	99.13	102.17	---	---	Peak
5350.000	33.70	8.57	39.26	51.32	54.34	74.00	19.66	Peak
5363.800	33.76	8.59	39.26	54.96	58.04	74.00	15.96	Peak

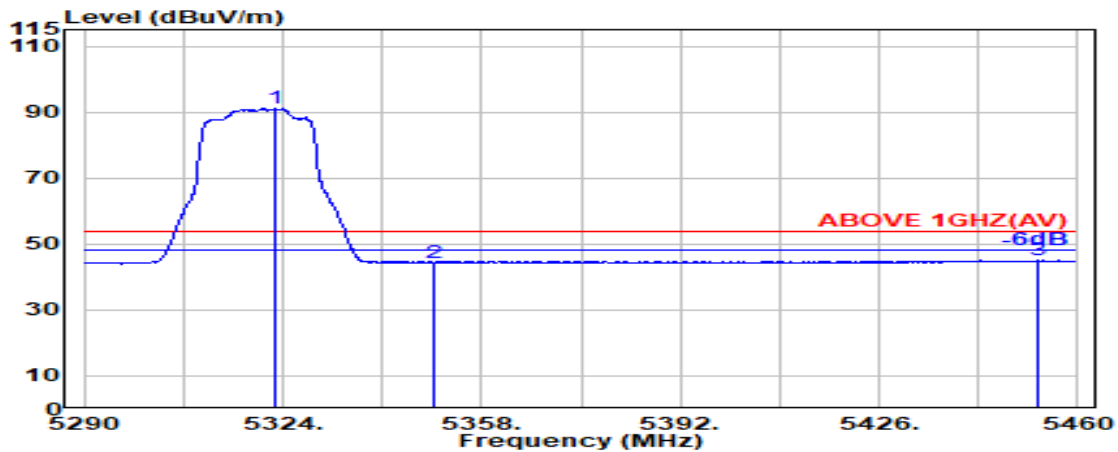


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.800	33.75	8.55	39.26	88.06	91.10	---	---	Average
5350.000	33.70	8.57	39.26	41.43	44.45	54.00	9.55	Average
5453.200	34.01	8.67	39.25	41.62	45.05	54.00	8.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

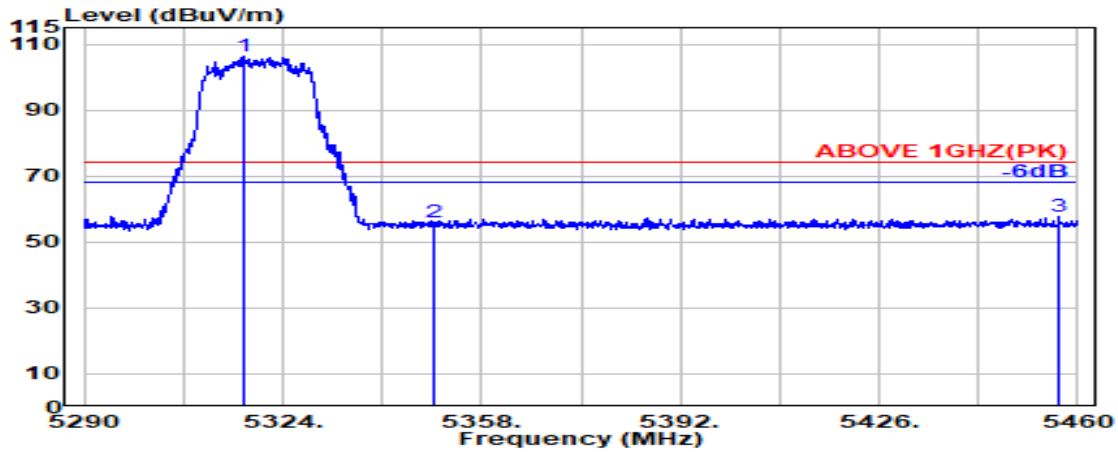

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.200	33.77	8.54	39.26	103.36	106.41	---	---	Peak
5350.000	33.70	8.57	39.26	52.86	55.87	74.00	18.13	Peak
5456.600	34.01	8.68	39.25	54.09	57.53	74.00	16.47	Peak

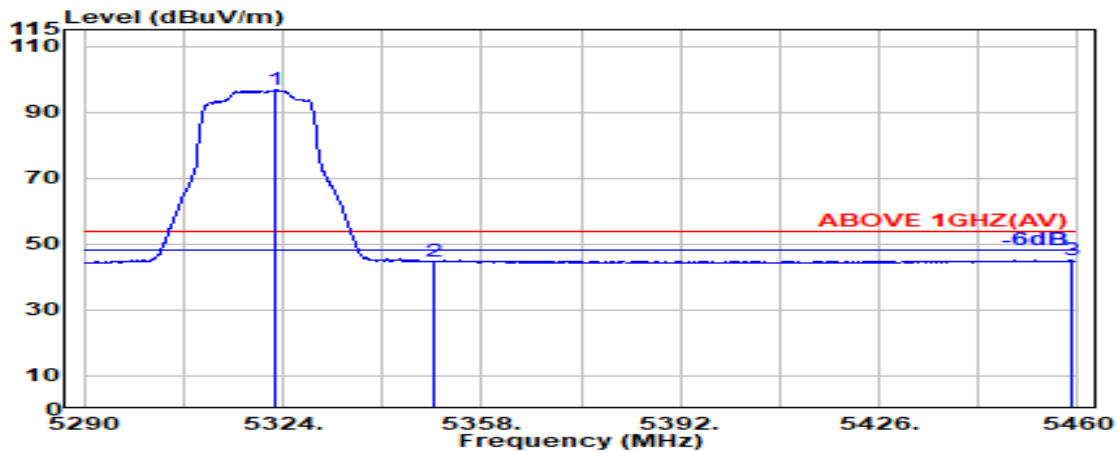


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.700	33.75	8.55	39.26	93.56	96.60	---	---	Average
5350.000	33.70	8.57	39.26	41.49	44.51	54.00	9.49	Average
5459.000	34.02	8.68	39.25	41.77	45.21	54.00	8.79	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

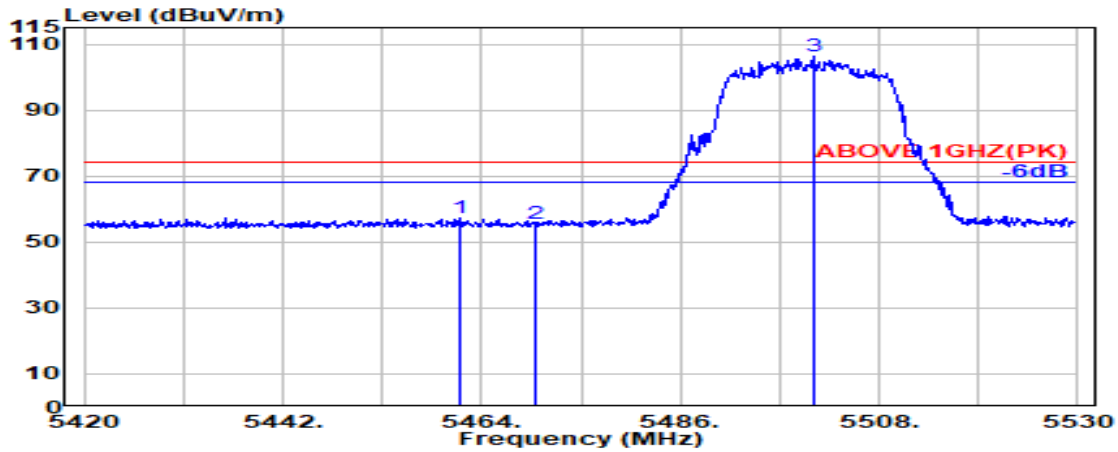

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.700	34.02	8.68	39.25	53.90	57.35	74.00	16.65	Peak
5470.000	34.04	8.69	39.25	51.87	55.34	74.00	18.66	Peak
@ 5500.700	34.10	8.72	39.25	102.70	106.26	---	---	Peak

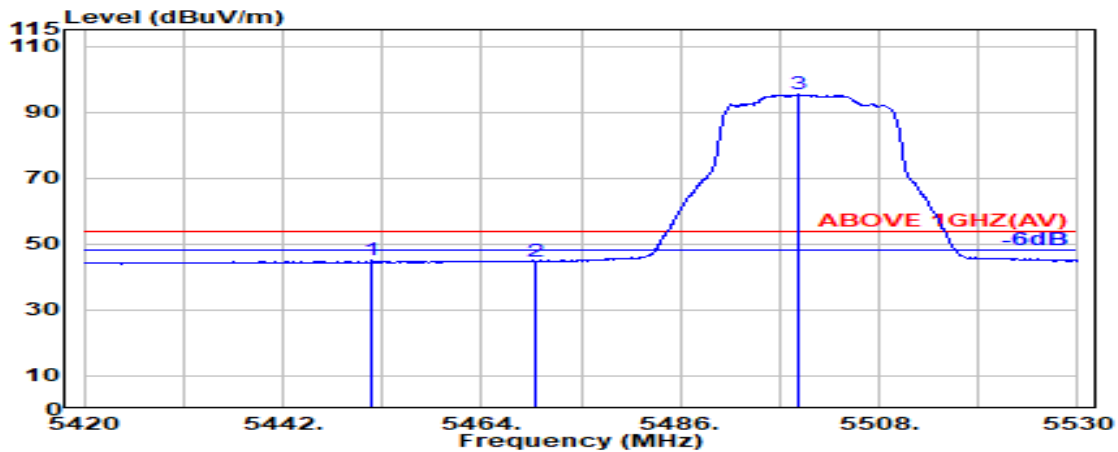


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.900	34.00	8.67	39.25	41.50	44.92	54.00	9.08	Average
5470.000	34.04	8.69	39.25	41.42	44.89	54.00	9.11	Average
@ 5499.200	34.10	8.72	39.25	91.70	95.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

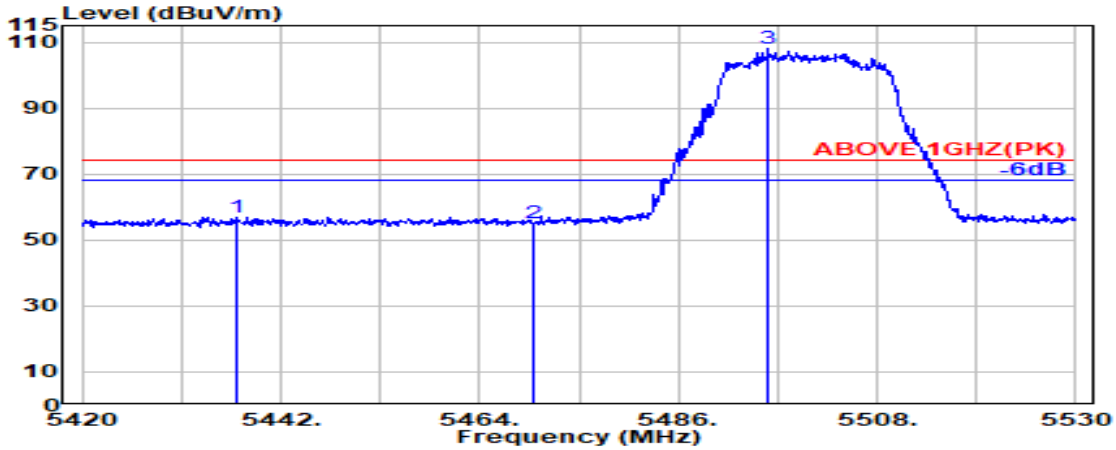

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.000	33.97	8.66	39.25	53.67	57.05	74.00	16.95	Peak
5470.000	34.04	8.69	39.25	51.84	55.32	74.00	18.68	Peak
@ 5495.900	34.09	8.71	39.25	104.38	107.93	---	---	Peak

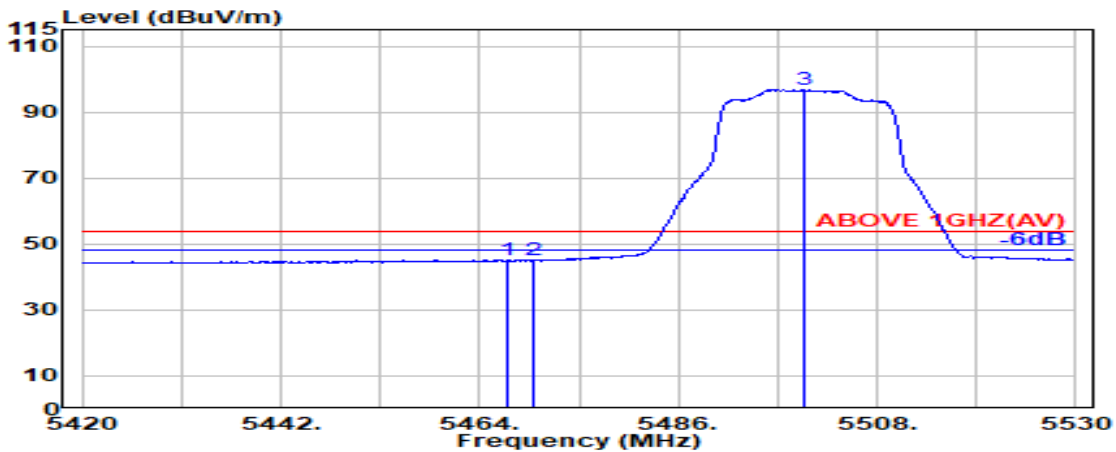


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.03	8.69	39.25	41.70	45.17	54.00	8.83	Average
5470.000	34.04	8.69	39.25	41.56	45.03	54.00	8.97	Average
@ 5499.800	34.10	8.72	39.25	93.18	96.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

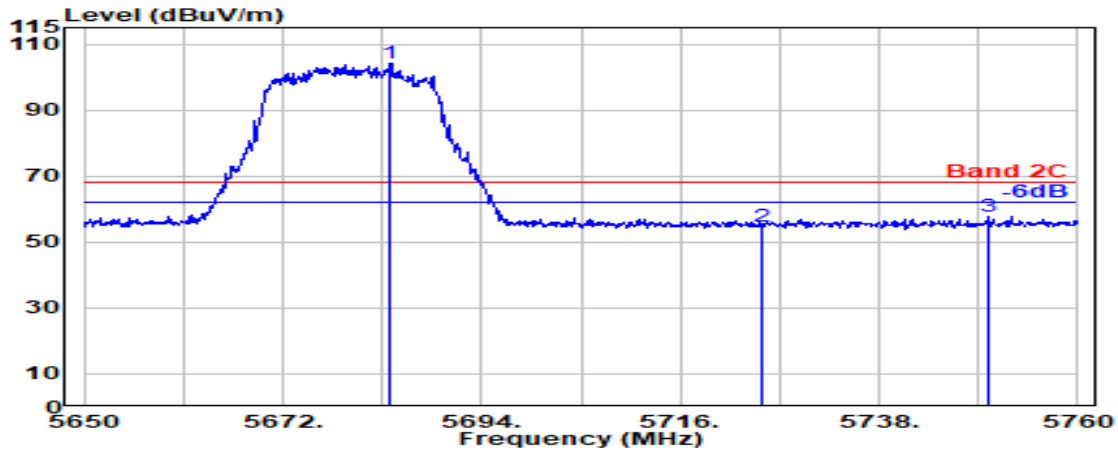

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.900	33.66	8.89	39.28	100.85	104.12	---	---	Peak
5725.000	33.60	8.93	39.29	51.51	54.75	68.20	13.45	Peak
5750.000	33.60	8.95	39.30	54.33	57.58	68.20	10.62	Peak

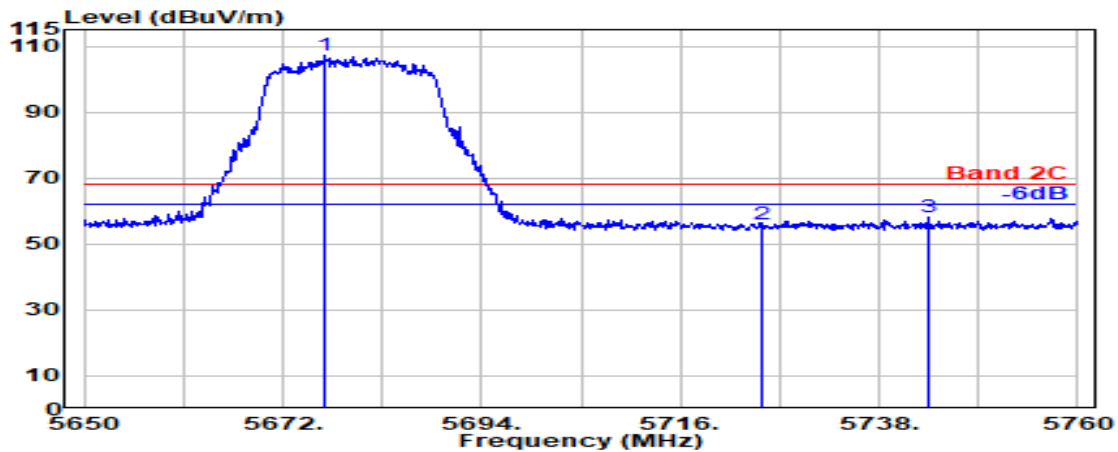


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.600	33.69	8.88	39.28	103.72	107.01	---	---	Peak
5725.000	33.60	8.93	39.29	52.75	55.99	68.20	12.21	Peak
5743.400	33.60	8.94	39.29	54.87	58.12	68.20	10.08	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

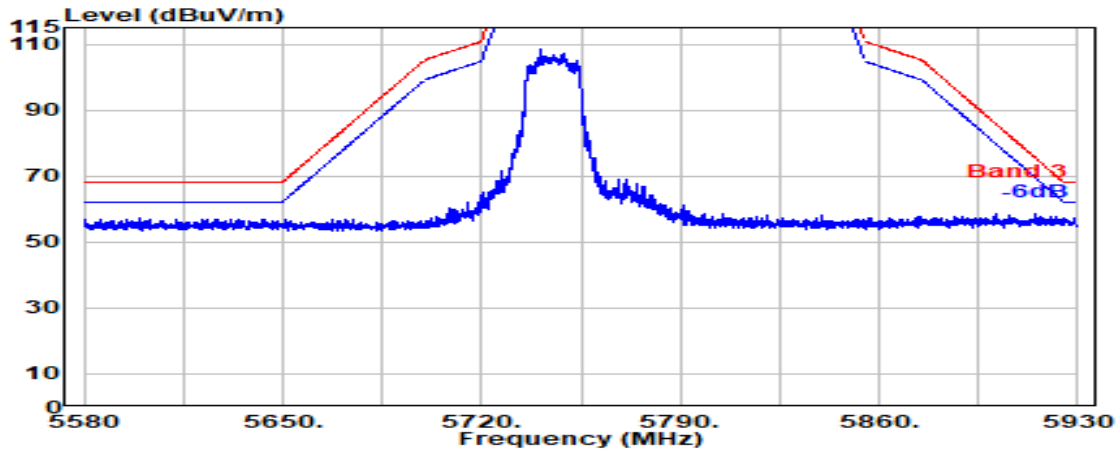


Antenna at Vertical Polarization

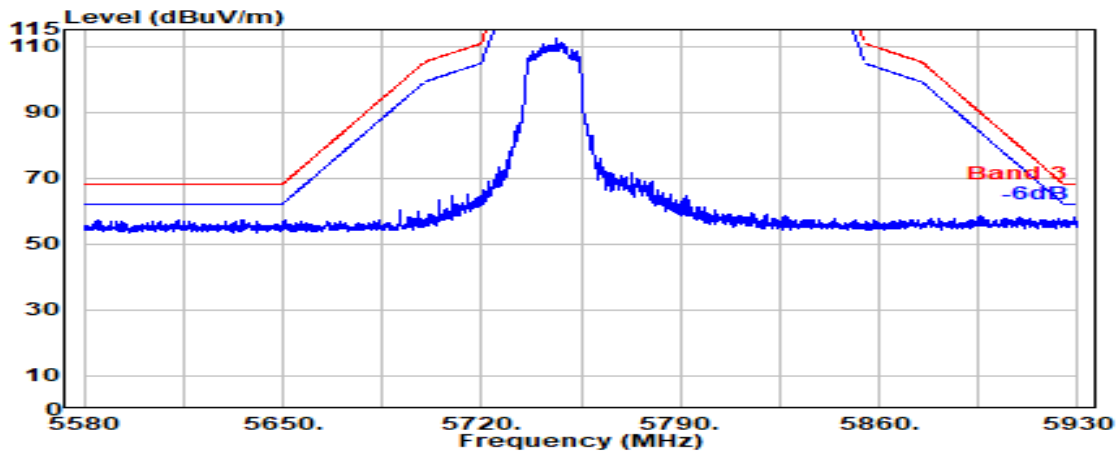


Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

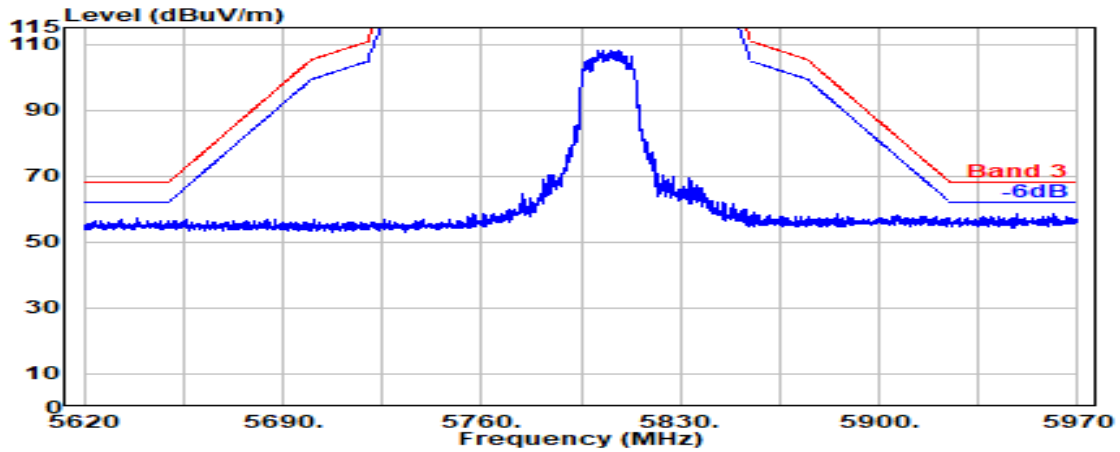

Antenna at Vertical Polarization

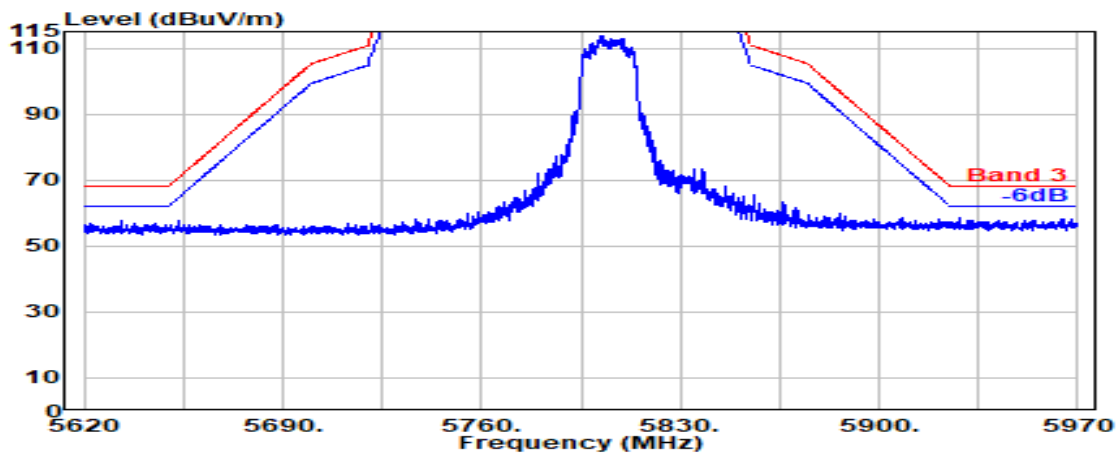


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

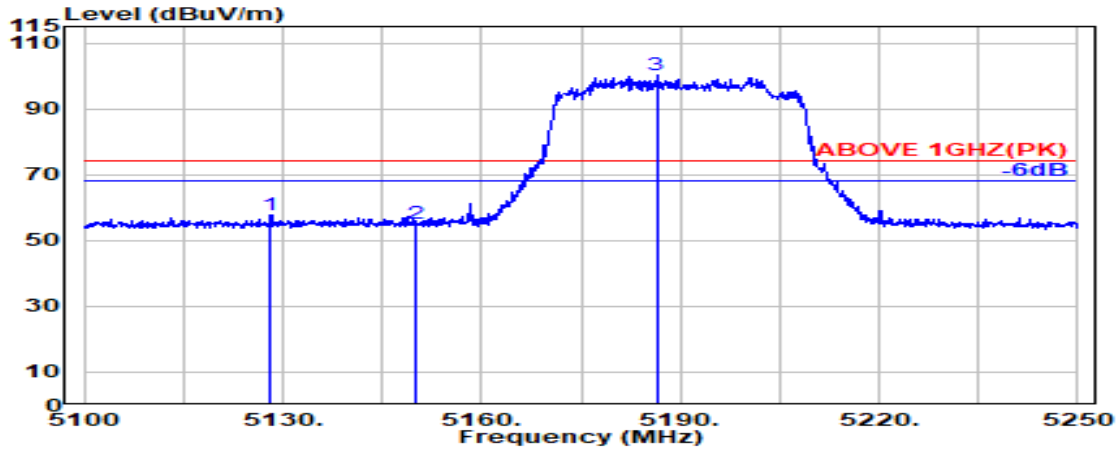

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.200	33.46	8.35	39.27	55.12	57.65	74.00	16.35	Peak
5150.000	33.50	8.37	39.27	52.72	55.32	74.00	18.68	Peak
@ 5186.400	33.72	8.41	39.27	97.20	100.06	---	---	Peak

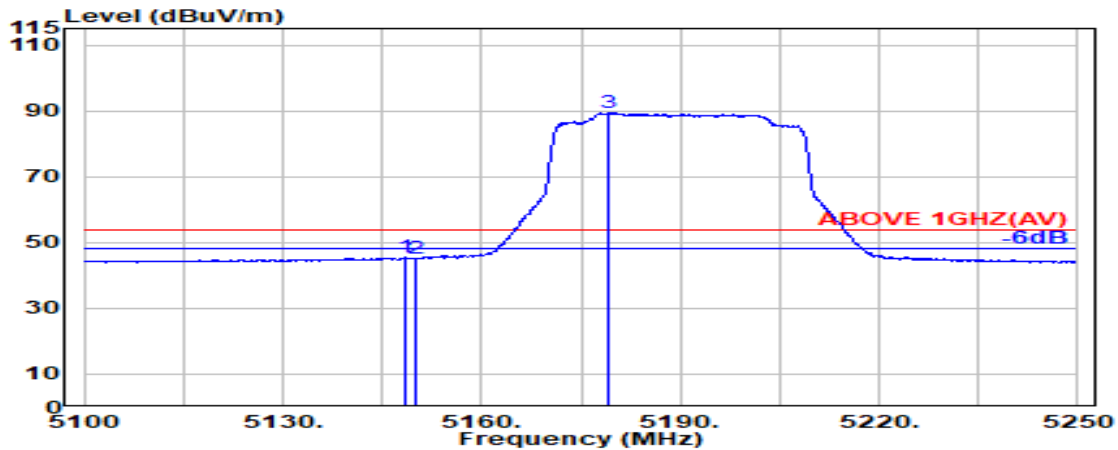


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.50	8.37	39.27	42.92	45.52	54.00	8.48	Average
5150.000	33.50	8.37	39.27	42.72	45.32	54.00	8.68	Average
@ 5179.300	33.68	8.40	39.27	86.66	89.47	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

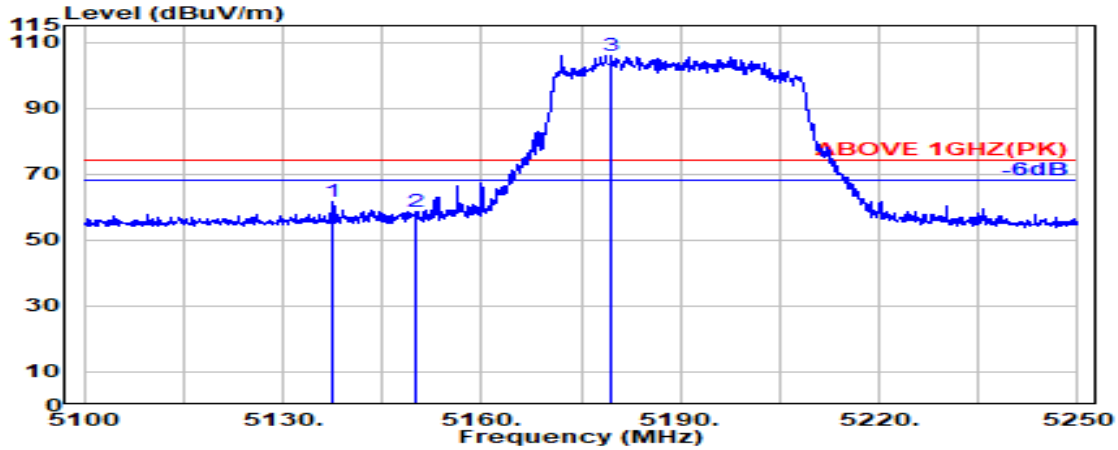

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.600	33.48	8.36	39.27	59.13	61.70	74.00	12.30	Peak
5150.000	33.50	8.37	39.27	56.04	58.65	74.00	15.35	Peak
@ 5179.500	33.68	8.40	39.27	103.21	106.02	---	---	Peak

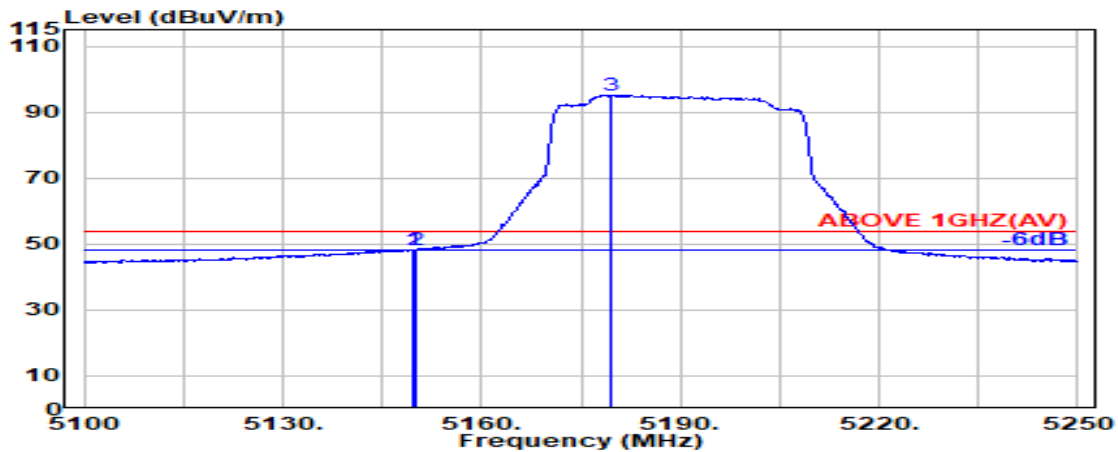


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.27	45.75	48.35	54.00	5.65	Average
5150.000	33.50	8.37	39.27	45.69	48.30	54.00	5.70	Average
@ 5179.700	33.68	8.40	39.27	92.41	95.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

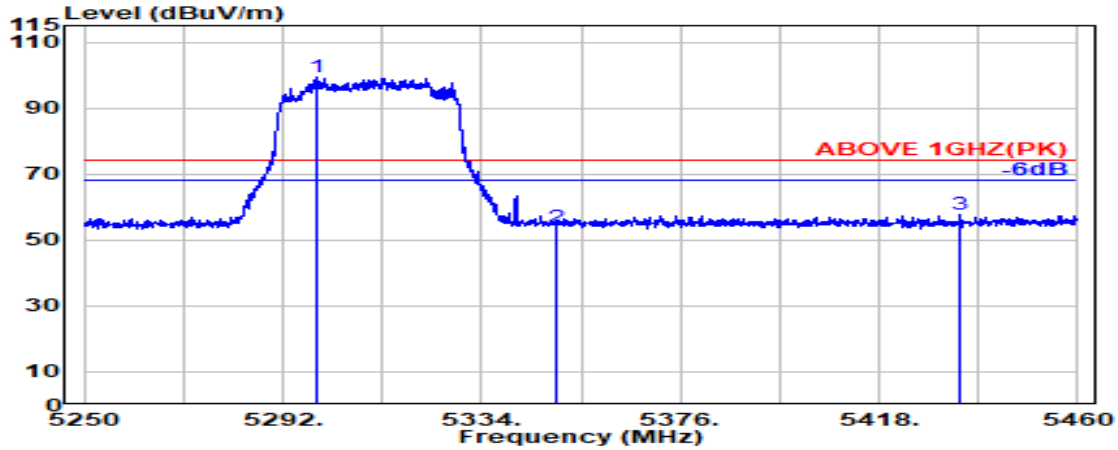

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.300	33.80	8.52	39.26	96.32	99.38	---	---	Peak
5350.000	33.70	8.57	39.26	50.95	53.97	74.00	20.03	Peak
5435.100	33.97	8.65	39.25	54.32	57.69	74.00	16.31	Peak

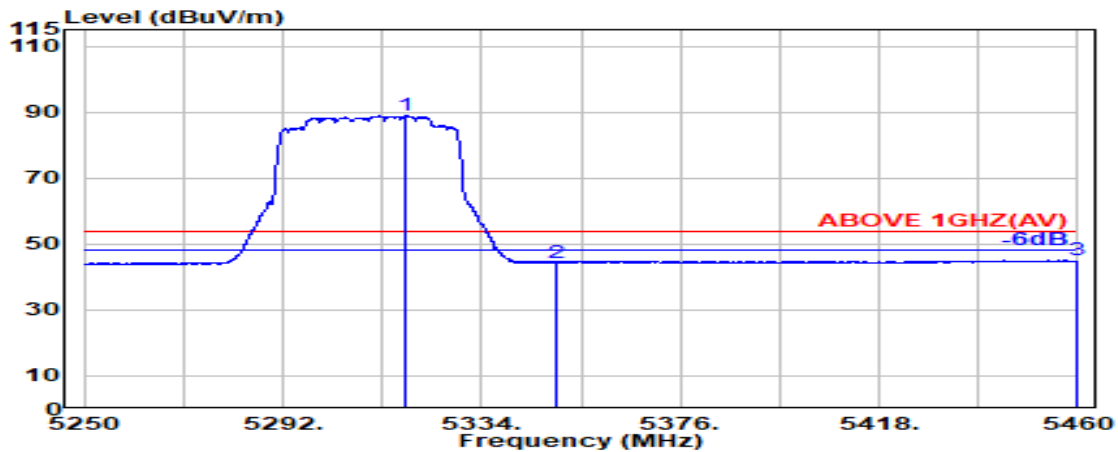


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.700	33.76	8.54	39.26	85.90	88.94	---	---	Average
5350.000	33.70	8.57	39.26	41.39	44.40	54.00	9.60	Average
5460.000	34.02	8.68	39.25	41.88	45.32	54.00	8.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

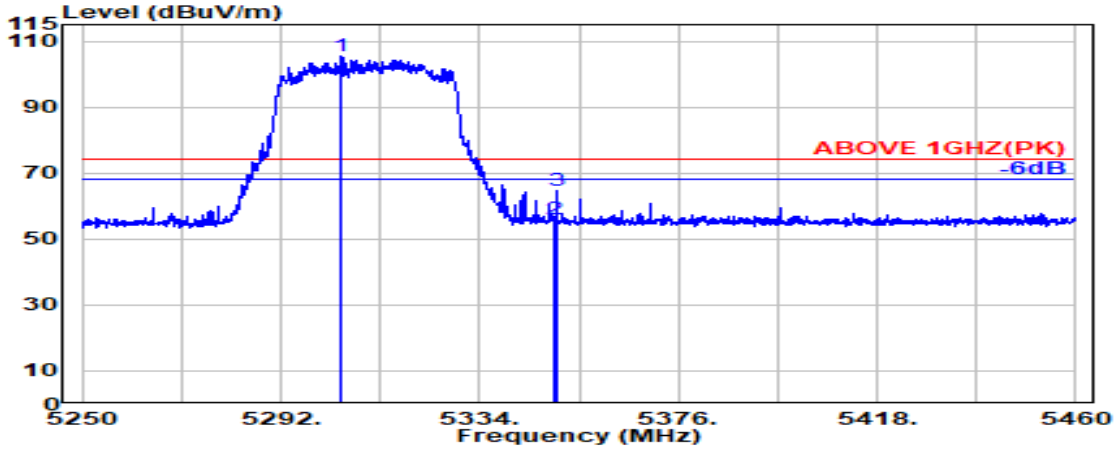

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.900	33.79	8.53	39.26	102.29	105.35	---	---	Peak
5350.000	33.70	8.57	39.26	52.96	55.98	74.00	18.02	Peak
5350.400	33.70	8.57	39.26	61.65	64.67	74.00	9.33	Peak

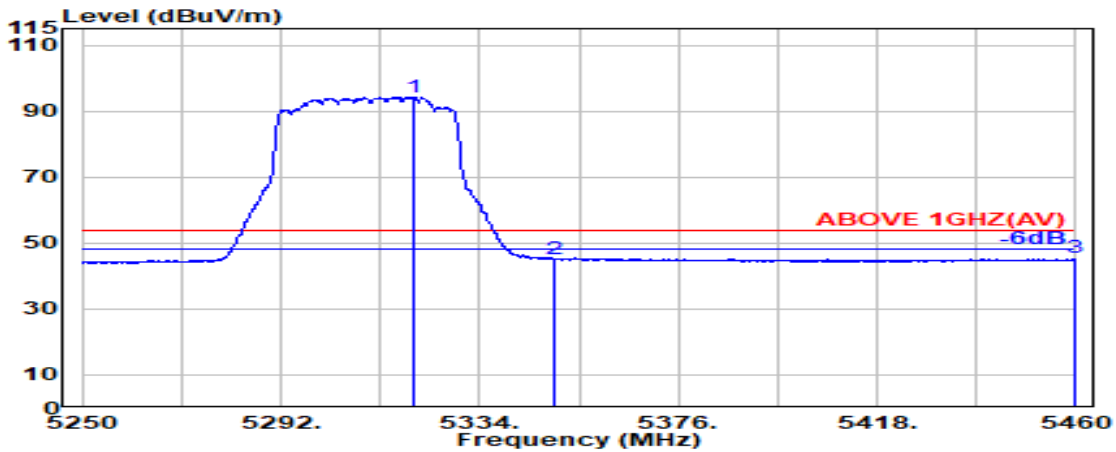


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.200	33.76	8.54	39.26	91.19	94.23	---	---	Average
5350.000	33.70	8.57	39.26	41.95	44.96	54.00	9.04	Average
5460.000	34.02	8.68	39.25	42.08	45.52	54.00	8.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

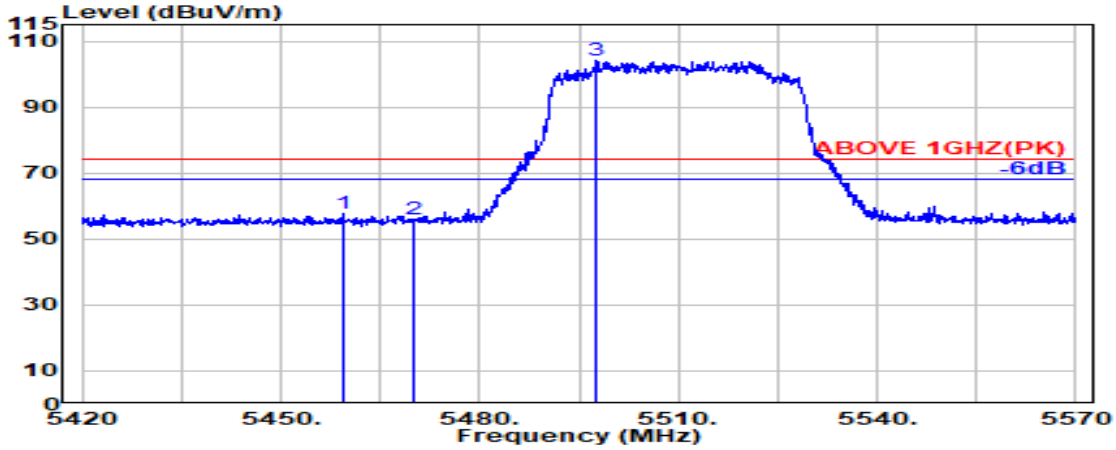

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	34.02	8.68	39.25	54.07	57.52	74.00	16.48	Peak
5470.000	34.04	8.69	39.25	52.29	55.76	74.00	18.24	Peak
@ 5497.600	34.10	8.71	39.25	100.48	104.04	---	---	Peak

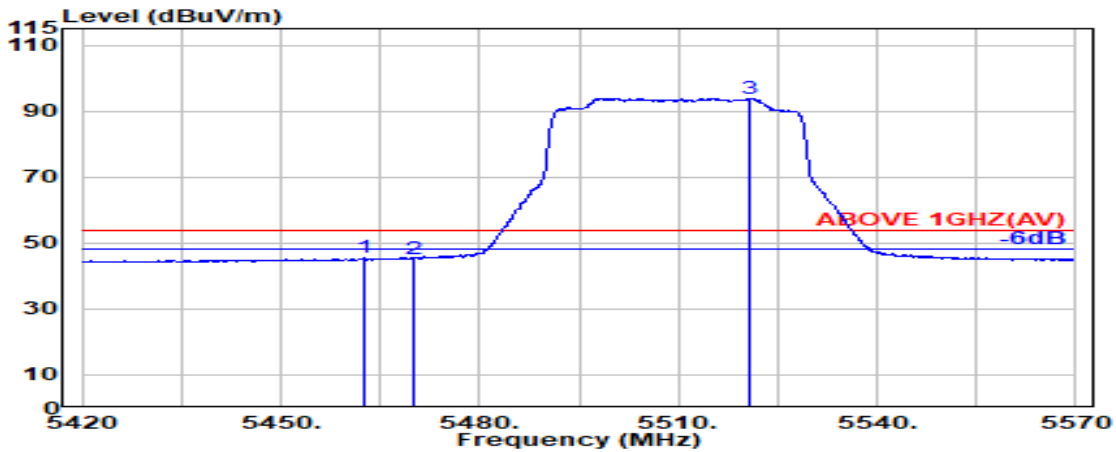


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.700	34.03	8.68	39.25	42.08	45.53	54.00	8.47	Average
5470.000	34.04	8.69	39.25	41.82	45.30	54.00	8.70	Average
@ 5520.900	34.06	8.74	39.25	90.39	93.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

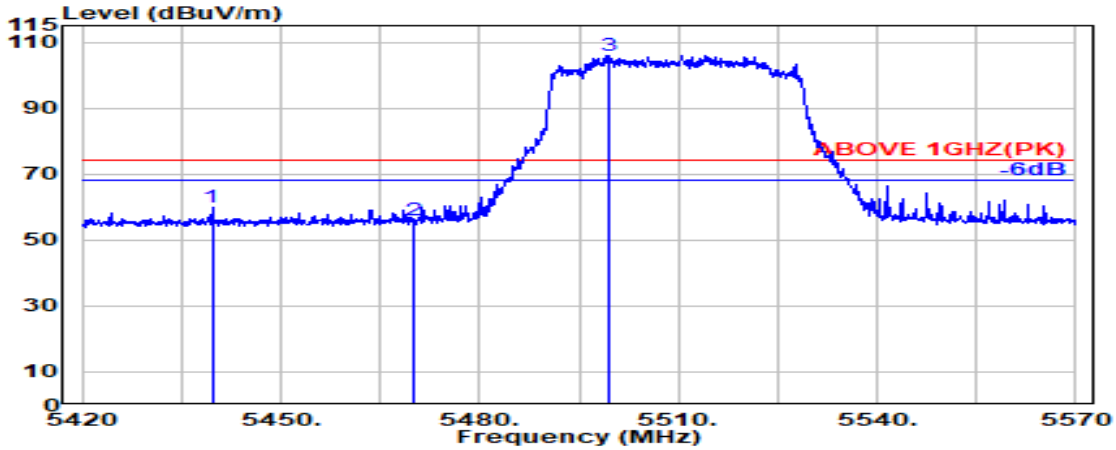

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.600	33.98	8.66	39.25	56.35	59.74	74.00	14.26	Peak
5470.000	34.04	8.69	39.25	52.45	55.93	74.00	18.07	Peak
@ 5499.400	34.10	8.72	39.25	102.38	105.94	---	---	Peak

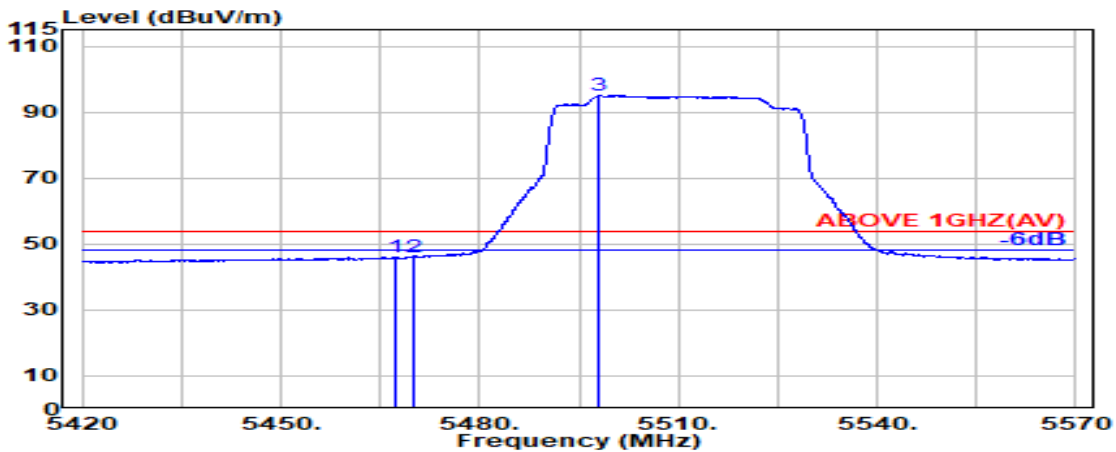


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.25	42.48	45.95	54.00	8.05	Average
5470.000	34.04	8.69	39.25	42.56	46.04	54.00	7.96	Average
@ 5498.100	34.10	8.71	39.25	91.52	95.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

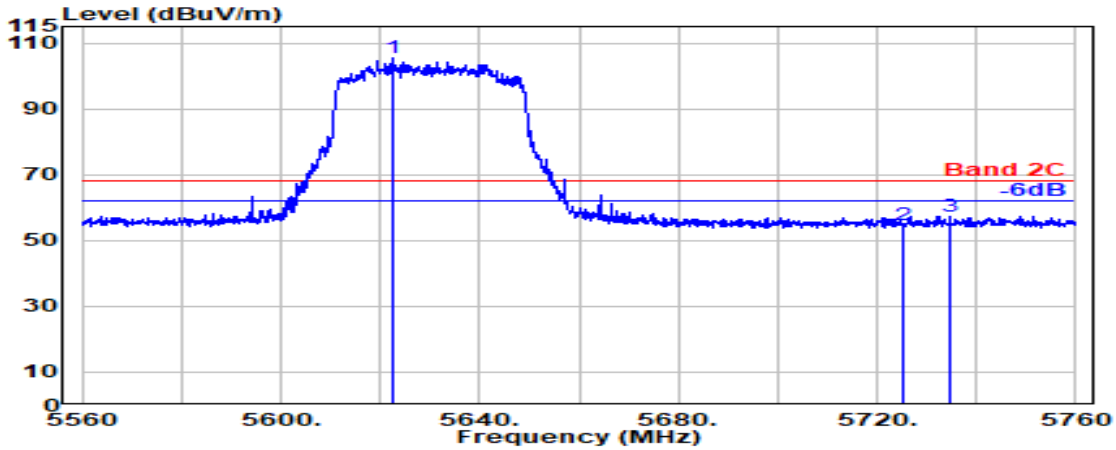

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.800	33.80	8.83	39.27	102.03	105.39	---	---	Peak
5725.000	33.60	8.93	39.29	51.49	54.73	68.20	13.47	Peak
5734.700	33.60	8.93	39.29	54.12	57.37	68.20	10.83	Peak

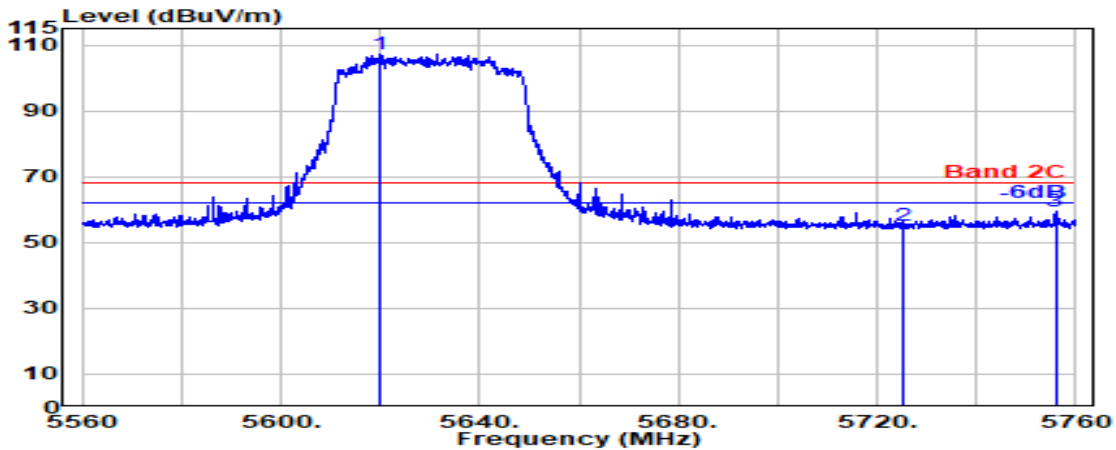


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.900	33.80	8.83	39.27	103.87	107.23	---	---	Peak
5725.000	33.60	8.93	39.29	51.82	55.05	68.20	13.15	Peak
5755.900	33.62	8.95	39.30	56.03	59.31	68.20	8.89	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

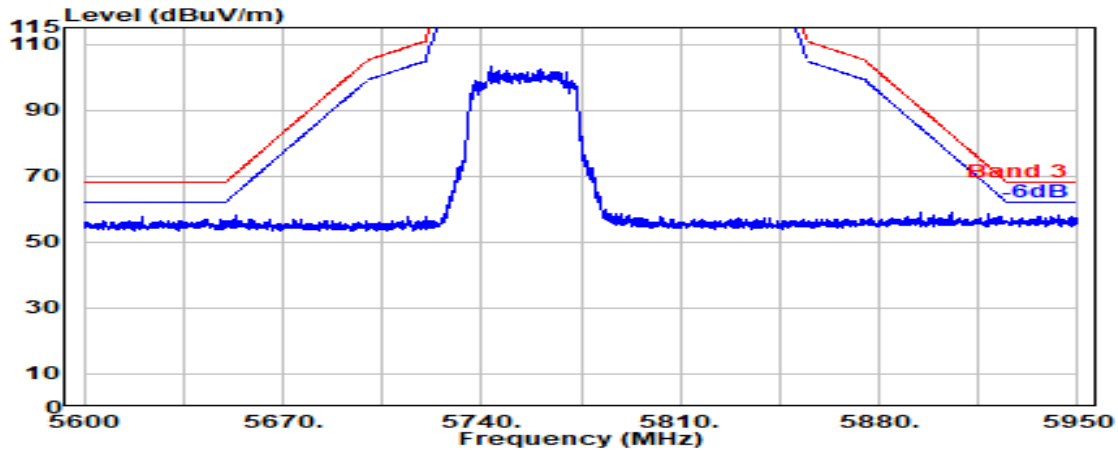


Antenna at Vertical Polarization

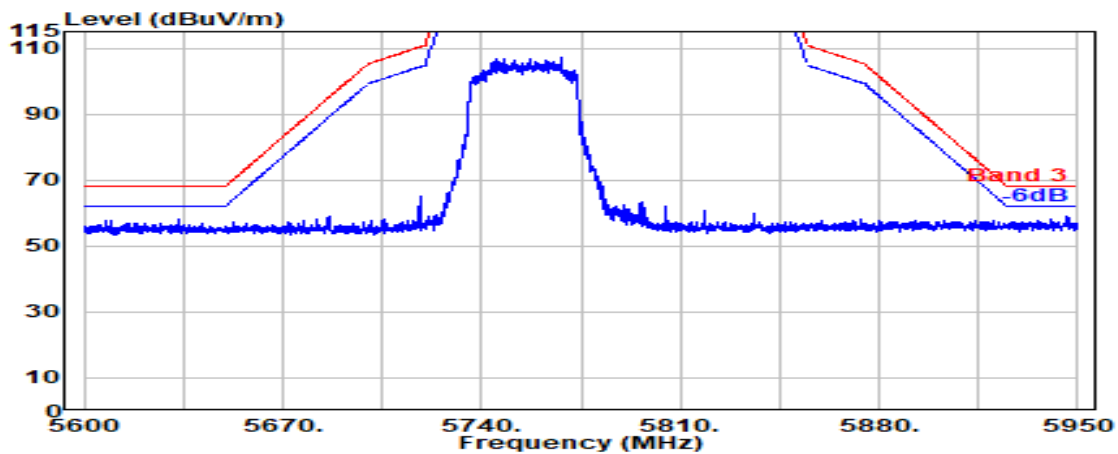


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

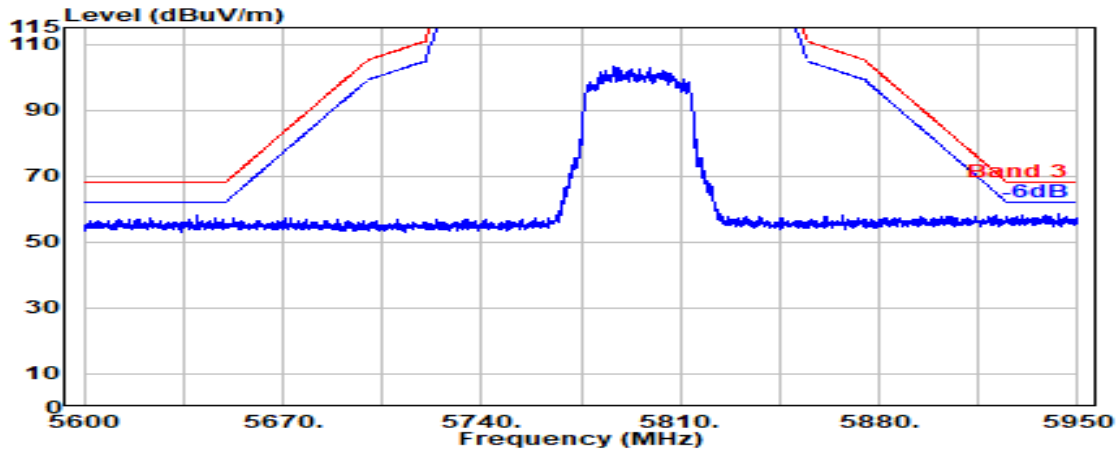

Antenna at Vertical Polarization

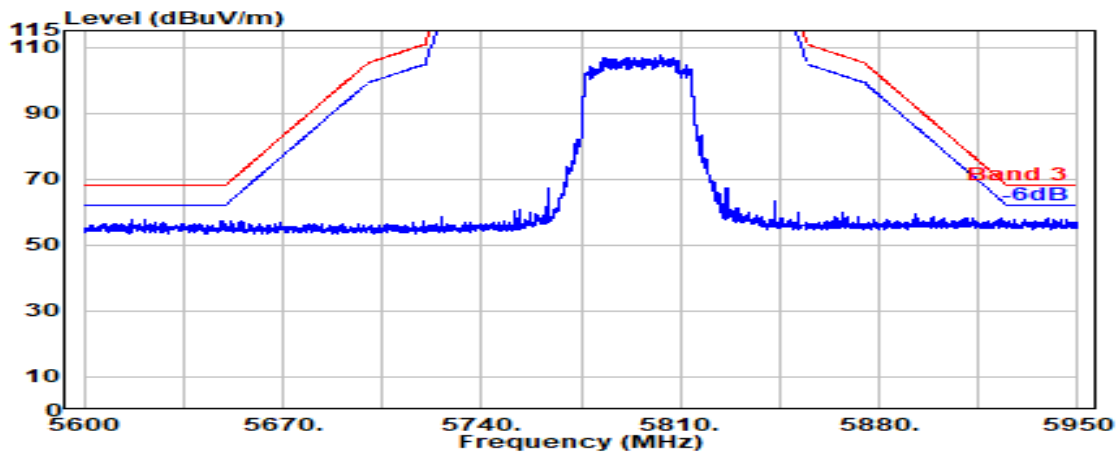


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

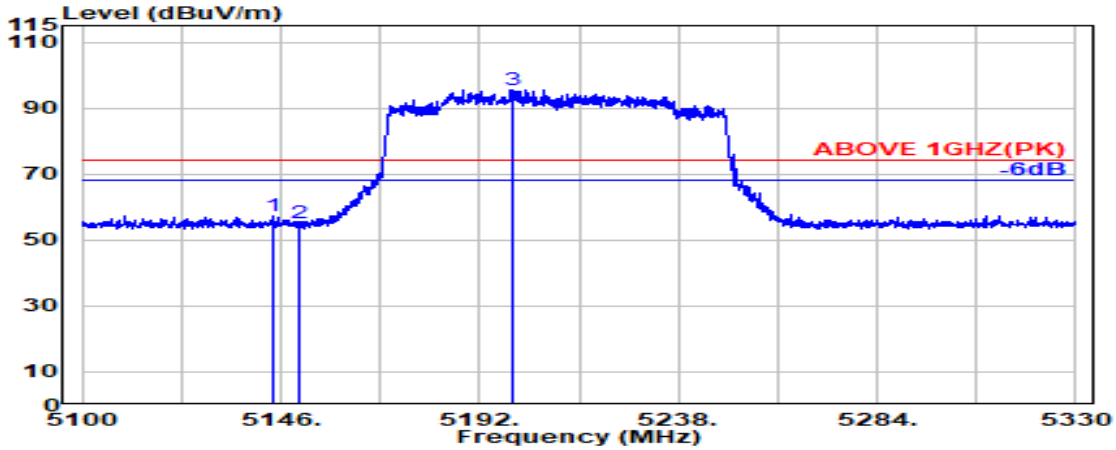

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.300	33.49	8.37	39.27	54.87	57.46	74.00	16.54	Peak
5150.000	33.50	8.37	39.27	52.43	55.03	74.00	18.97	Peak
@ 5199.400	33.80	8.42	39.27	92.55	95.50	---	---	Peak

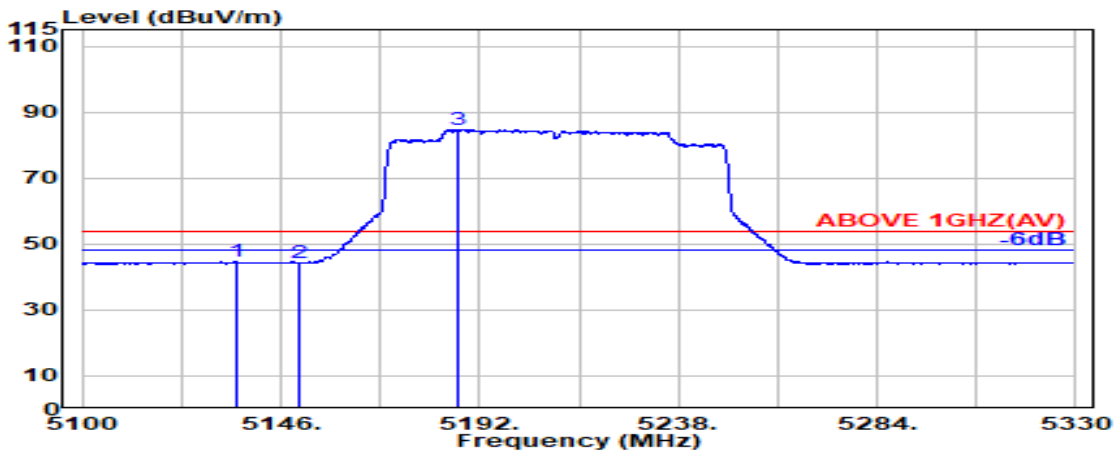


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.500	33.47	8.36	39.27	42.00	44.56	54.00	9.44	Average
5150.000	33.50	8.37	39.27	41.62	44.22	54.00	9.78	Average
@ 5186.800	33.72	8.41	39.27	81.87	84.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

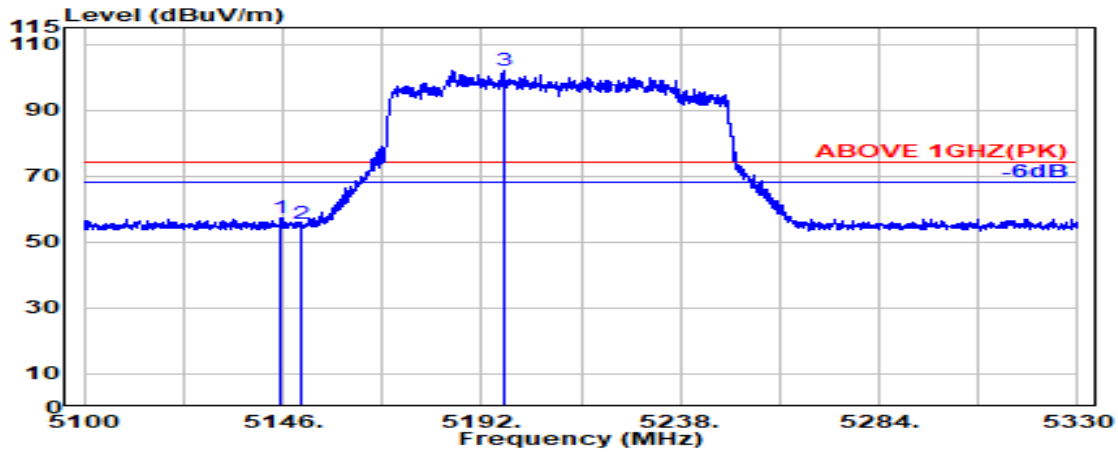

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.49	8.37	39.27	54.83	57.42	74.00	16.58	Peak
5150.000	33.50	8.37	39.27	52.77	55.37	74.00	18.63	Peak
@ 5197.000	33.78	8.42	39.27	98.99	101.92	---	---	Peak

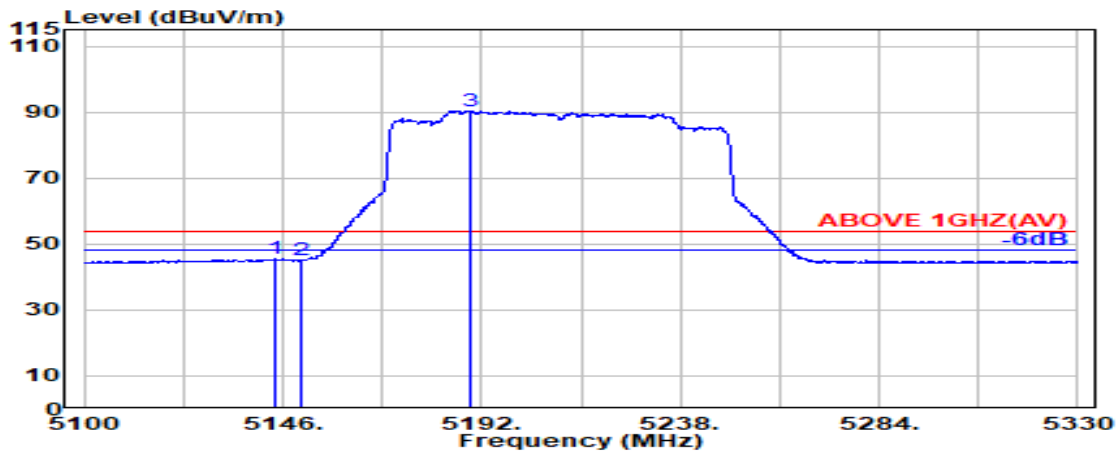


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.200	33.49	8.37	39.27	42.94	45.52	54.00	8.48	Average
5150.000	33.50	8.37	39.27	42.54	45.14	54.00	8.86	Average
@ 5189.500	33.74	8.41	39.27	87.47	90.36	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

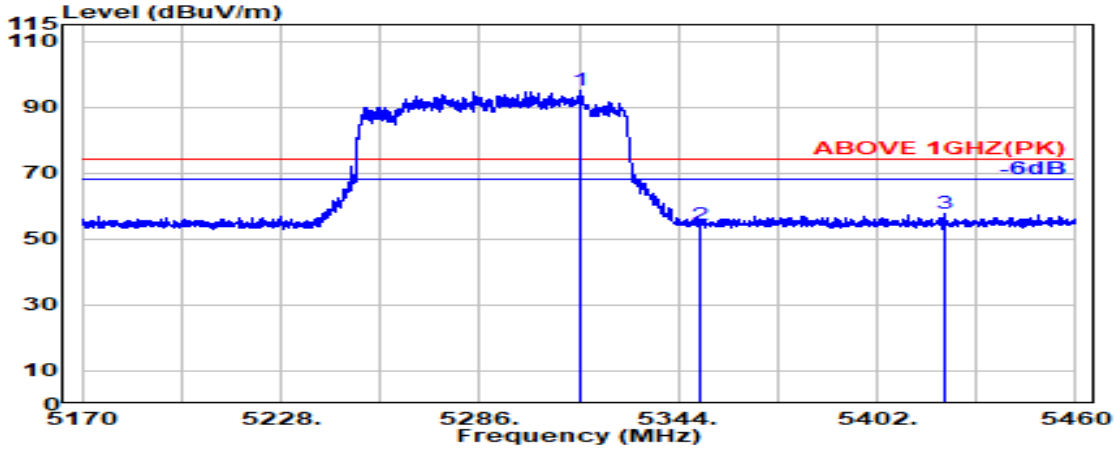

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.200	33.77	8.54	39.26	92.04	95.09	---	---	Peak
5350.000	33.70	8.57	39.26	51.34	54.35	74.00	19.65	Peak
5422.000	33.94	8.64	39.25	54.27	57.60	74.00	16.40	Peak

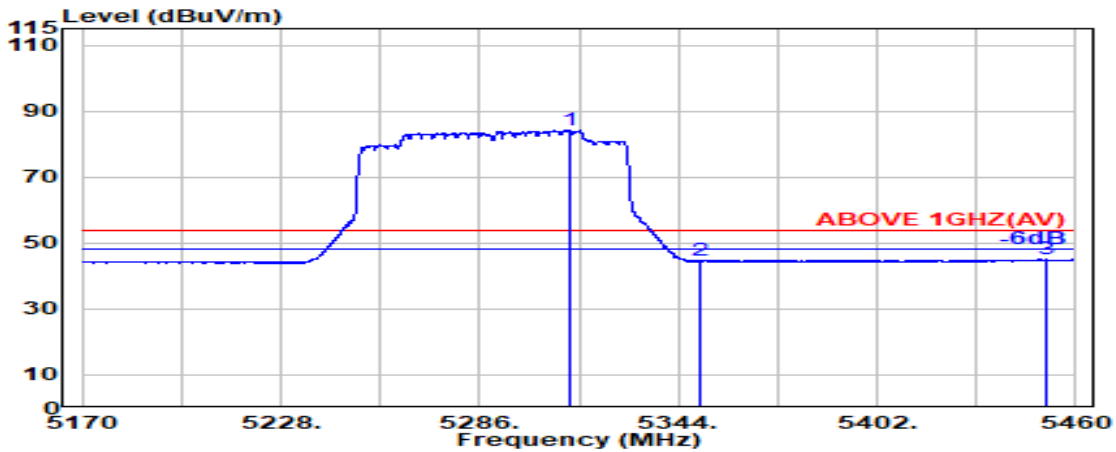


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.400	33.78	8.54	39.26	81.11	84.16	---	---	Average
5350.000	33.70	8.57	39.26	41.51	44.52	54.00	9.48	Average
5451.400	34.00	8.67	39.25	41.61	45.03	54.00	8.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

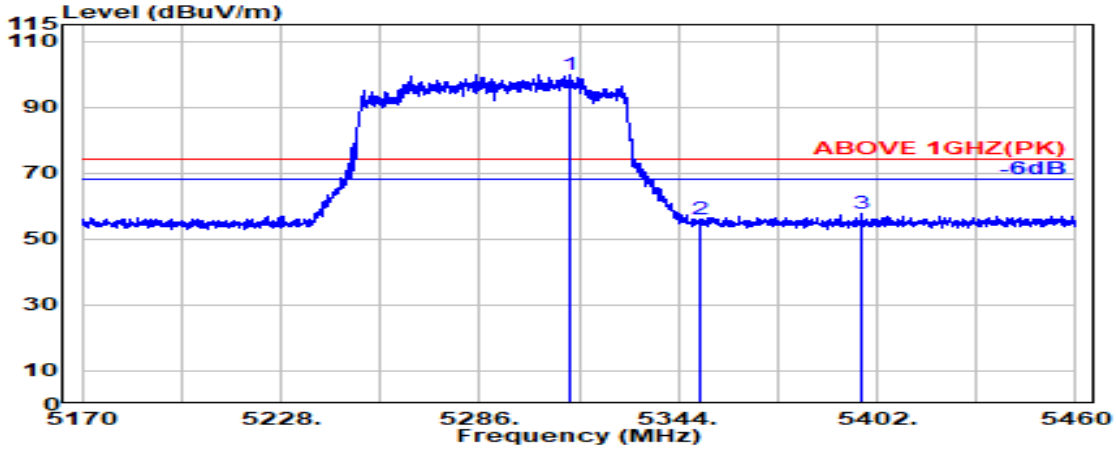

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.600	33.77	8.54	39.26	96.76	99.81	---	---	Peak
5350.000	33.70	8.57	39.26	53.04	56.05	74.00	17.95	Peak
5397.300	33.89	8.62	39.26	54.33	57.58	74.00	16.42	Peak

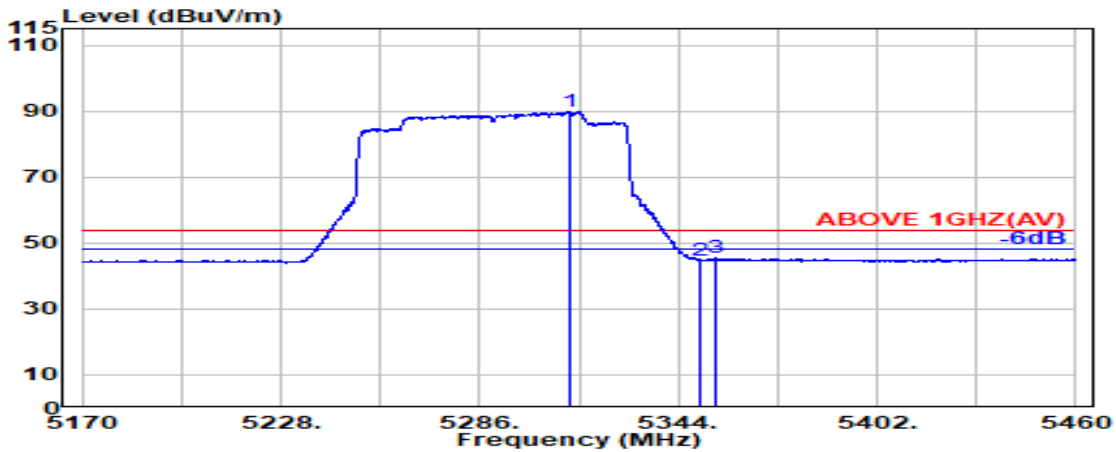


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.000	33.78	8.54	39.26	86.88	89.93	---	---	Average
5350.000	33.70	8.57	39.26	41.80	44.82	54.00	9.18	Average
5354.700	33.72	8.58	39.26	42.32	45.36	54.00	8.64	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

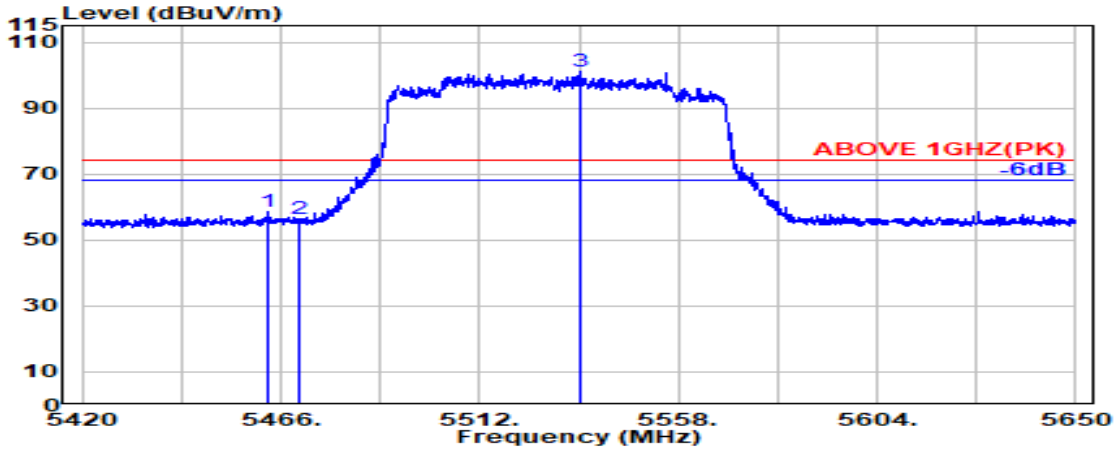

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.03	8.68	39.25	54.95	58.40	74.00	15.60	Peak
5470.000	34.04	8.69	39.25	53.12	56.60	74.00	17.40	Peak
@ 5535.100	34.03	8.75	39.26	97.68	101.20	---	---	Peak

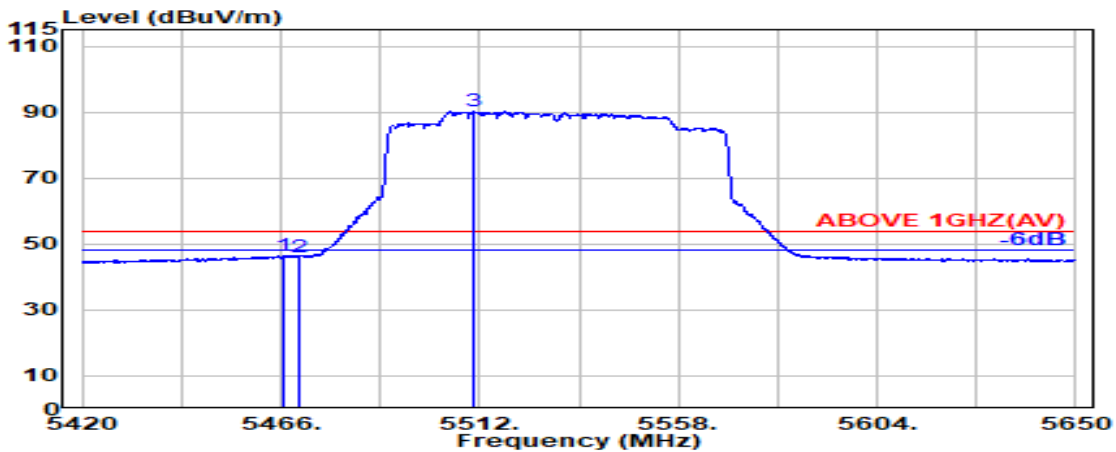


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.03	8.69	39.25	43.00	46.46	54.00	7.54	Average
5470.000	34.04	8.69	39.25	42.55	46.03	54.00	7.97	Average
@ 5510.400	34.08	8.73	39.25	86.62	90.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

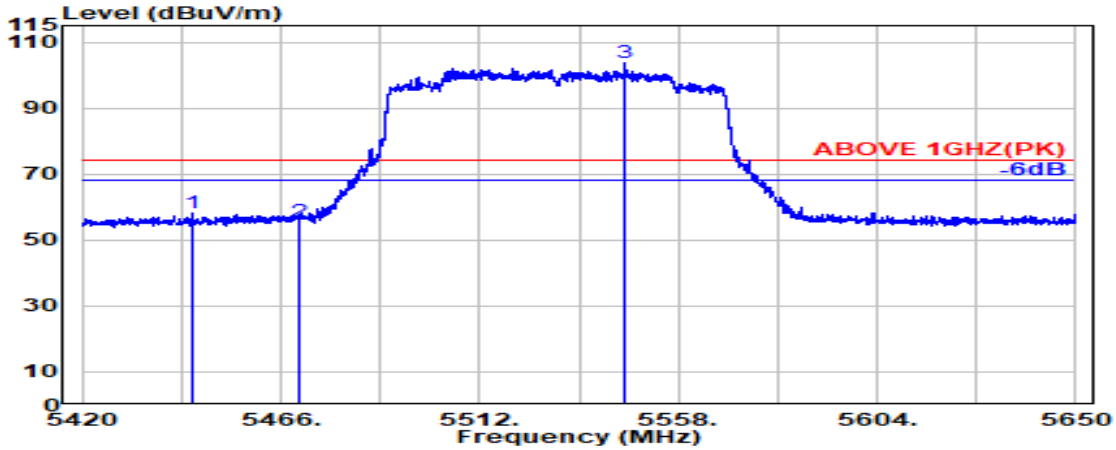

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.500	33.99	8.66	39.25	54.79	58.19	74.00	15.81	Peak
5470.000	34.04	8.69	39.25	52.28	55.76	74.00	18.24	Peak
@ 5545.700	34.01	8.76	39.26	100.19	103.70	---	---	Peak

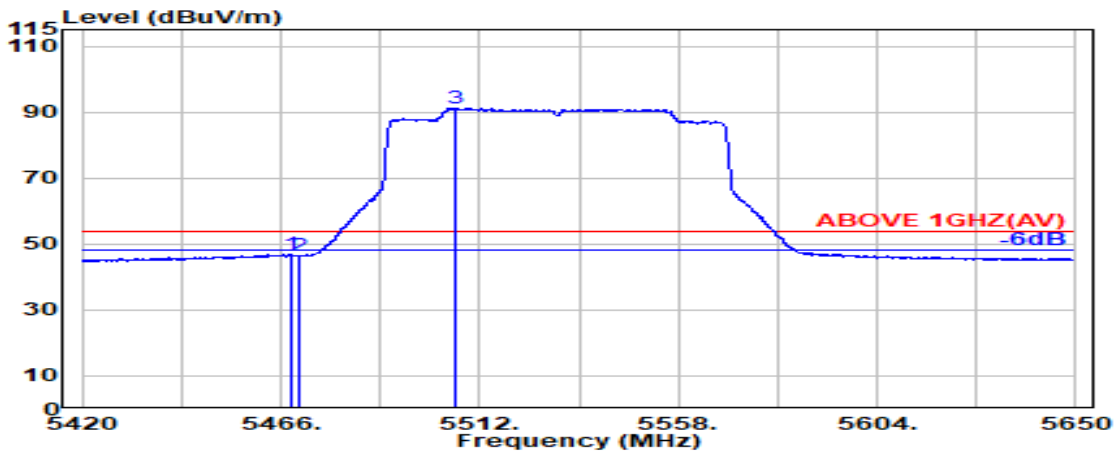


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.25	43.31	46.78	54.00	7.22	Average
5470.000	34.04	8.69	39.25	42.82	46.30	54.00	7.70	Average
@ 5506.400	34.09	8.72	39.25	87.60	91.16	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

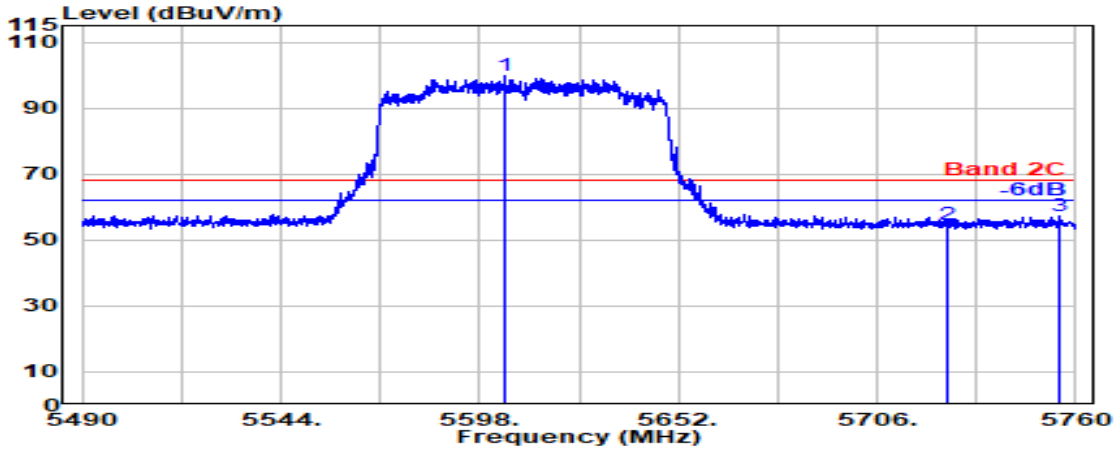

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5604.900	33.80	8.82	39.27	96.25	99.60	---	---	Peak
5725.000	33.60	8.93	39.29	51.24	54.47	68.20	13.73	Peak
5755.300	33.62	8.95	39.30	53.91	57.19	68.20	11.01	Peak

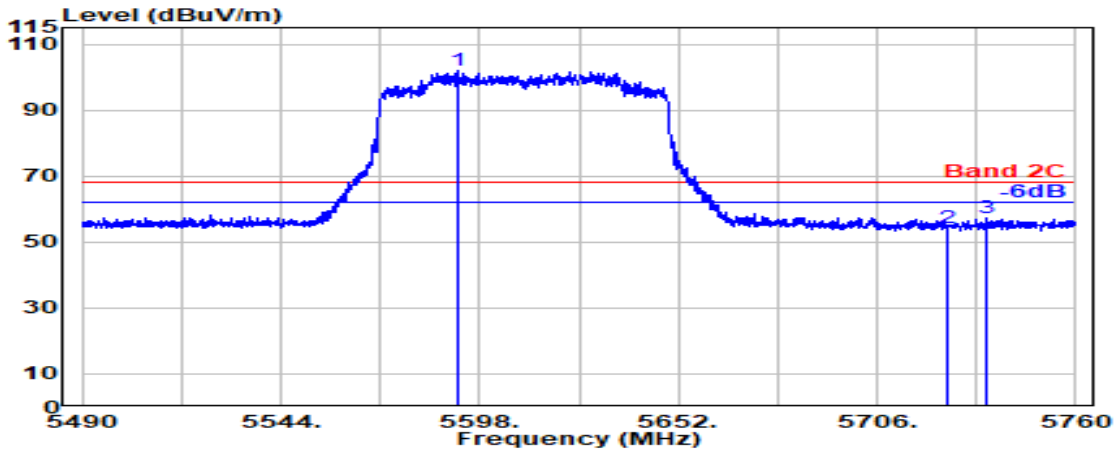

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.200	33.83	8.80	39.27	98.83	102.19	---	---	Peak
5725.000	33.60	8.93	39.29	51.09	54.32	68.20	13.88	Peak
5735.900	33.60	8.94	39.29	54.00	57.24	68.20	10.96	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.