



Mode	802.11be-EHT20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

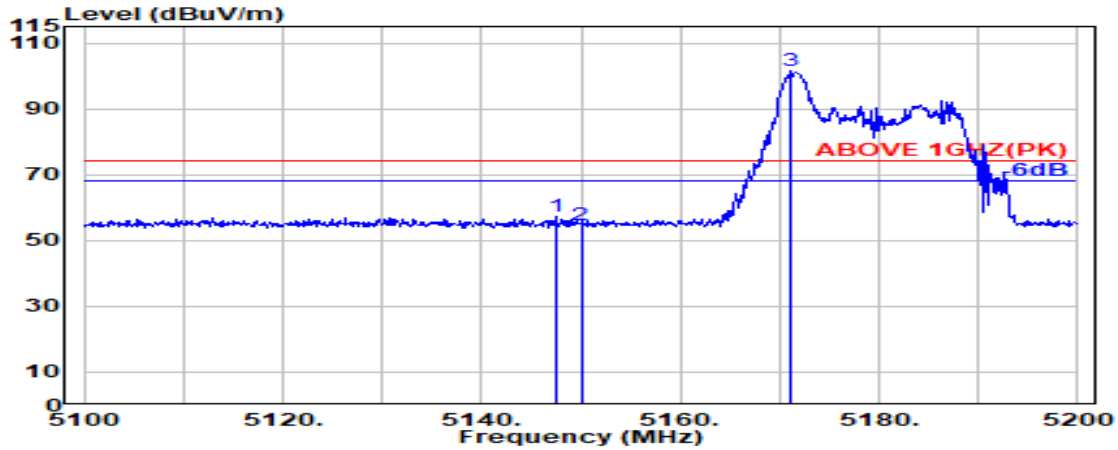

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.49	8.37	39.27	54.49	57.08	74.00	16.92	Peak
5150.000	33.50	8.37	39.27	51.89	54.49	74.00	19.51	Peak
@ 5171.200	33.63	8.40	39.27	98.71	101.46	---	---	Peak

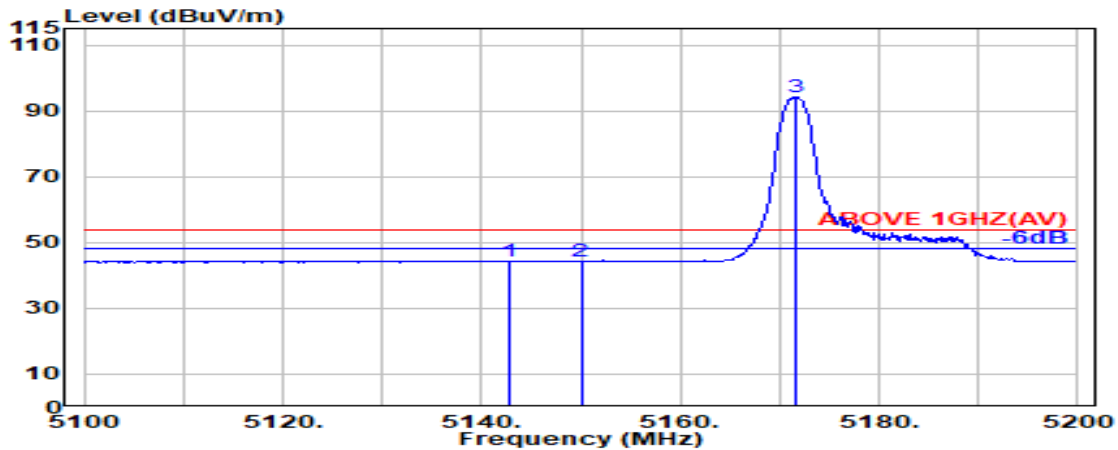


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.700	33.49	8.37	39.27	41.84	44.42	54.00	9.58	Average
5150.000	33.50	8.37	39.27	41.77	44.37	54.00	9.63	Average
@ 5171.500	33.63	8.40	39.27	91.45	94.20	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

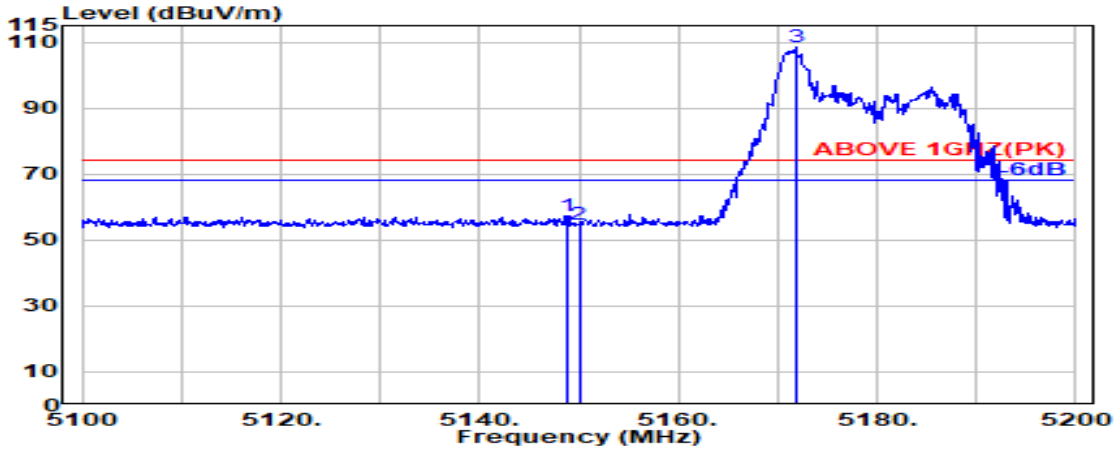

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.27	54.80	57.40	74.00	16.60	Peak
5150.000	33.50	8.37	39.27	52.15	54.75	74.00	19.25	Peak
@ 5171.800	33.63	8.40	39.27	105.63	108.39	---	---	Peak

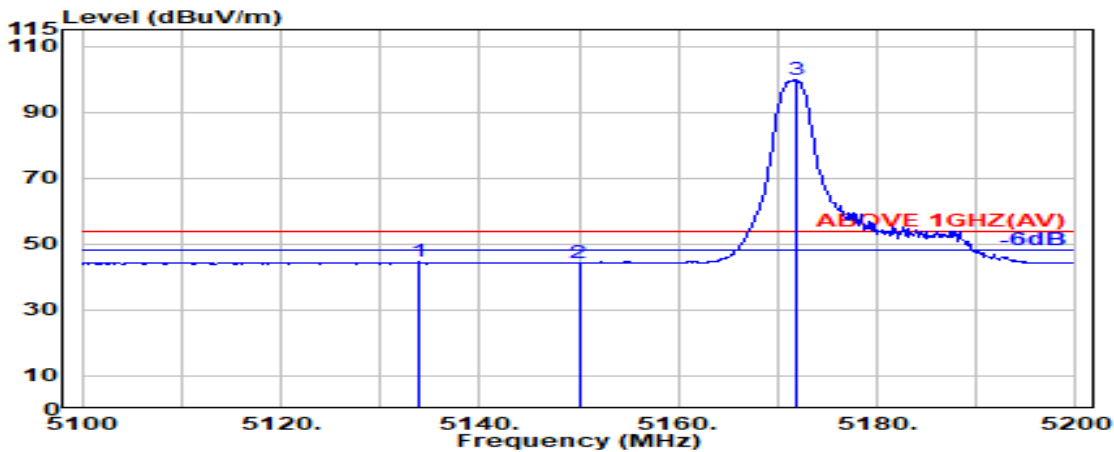


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.900	33.47	8.36	39.27	42.00	44.55	54.00	9.45	Average
5150.000	33.50	8.37	39.27	41.68	44.28	54.00	9.72	Average
@ 5171.900	33.63	8.40	39.27	96.93	99.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

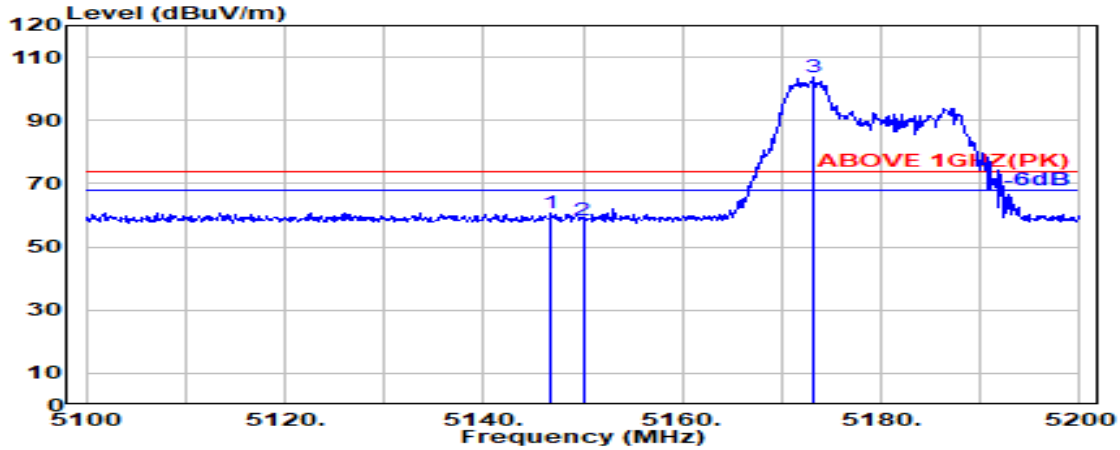

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	33.49	8.37	39.27	58.30	60.90	74.00	13.10	Peak
5150.000	33.50	8.37	39.27	55.94	58.54	74.00	15.46	Peak
@ 5173.200	33.64	8.40	39.27	100.82	103.59	---	---	Peak

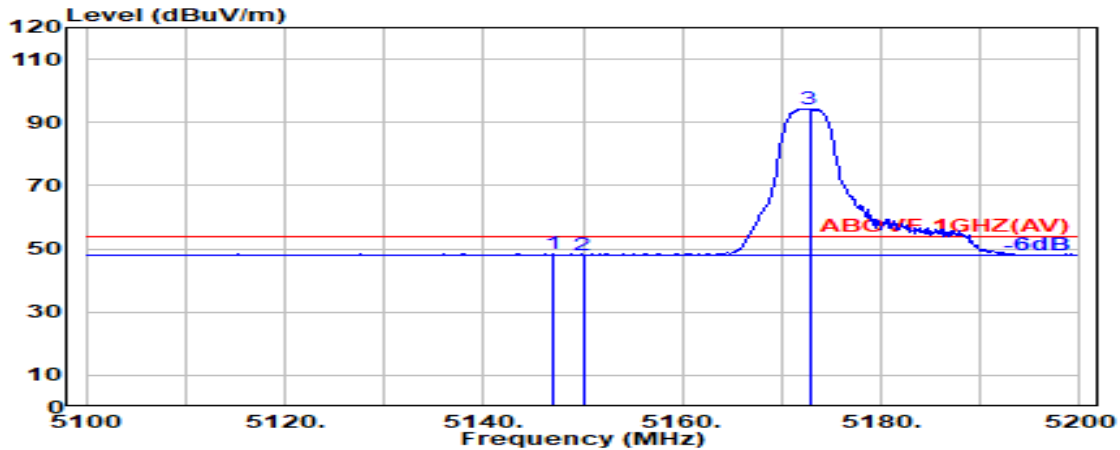


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.49	8.37	39.27	45.79	48.38	54.00	5.62	Average
5150.000	33.50	8.37	39.27	45.55	48.16	54.00	5.84	Average
@ 5172.800	33.64	8.40	39.27	91.59	94.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

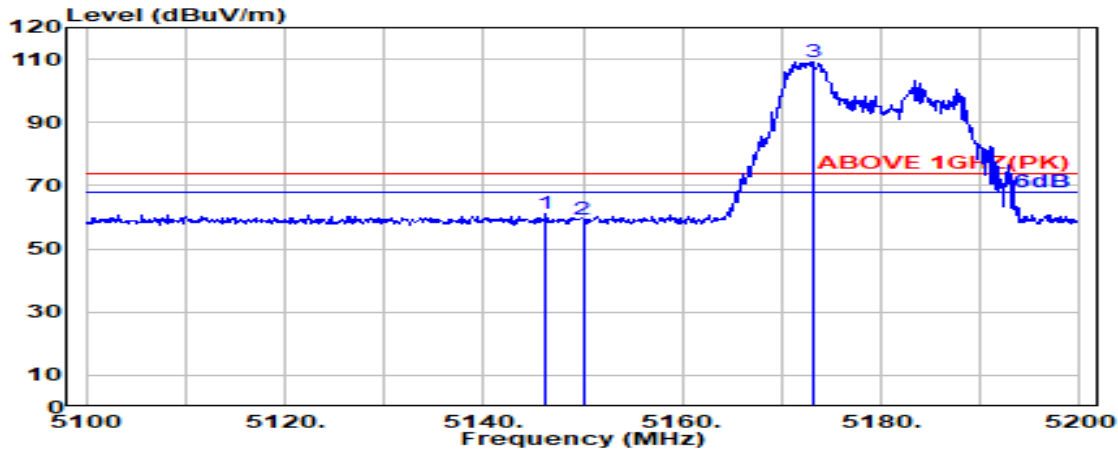

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	33.49	8.37	39.27	58.35	60.94	74.00	13.06	Peak
5150.000	33.50	8.37	39.27	56.83	59.43	74.00	14.57	Peak
@ 5173.100	33.64	8.40	39.27	106.49	109.26	---	---	Peak

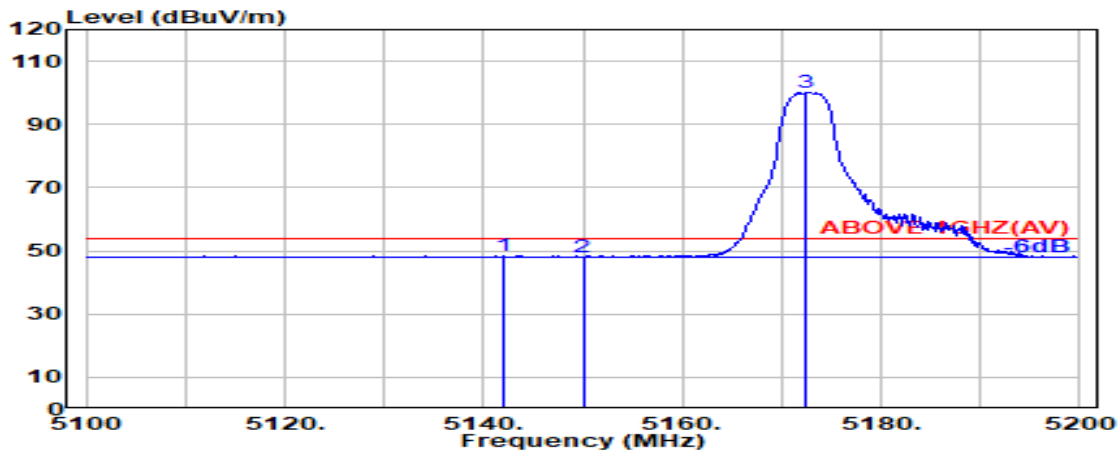


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.900	33.48	8.37	39.27	45.77	48.35	54.00	5.65	Average
5150.000	33.50	8.37	39.27	45.58	48.19	54.00	5.81	Average
@ 5172.400	33.63	8.40	39.27	97.41	100.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

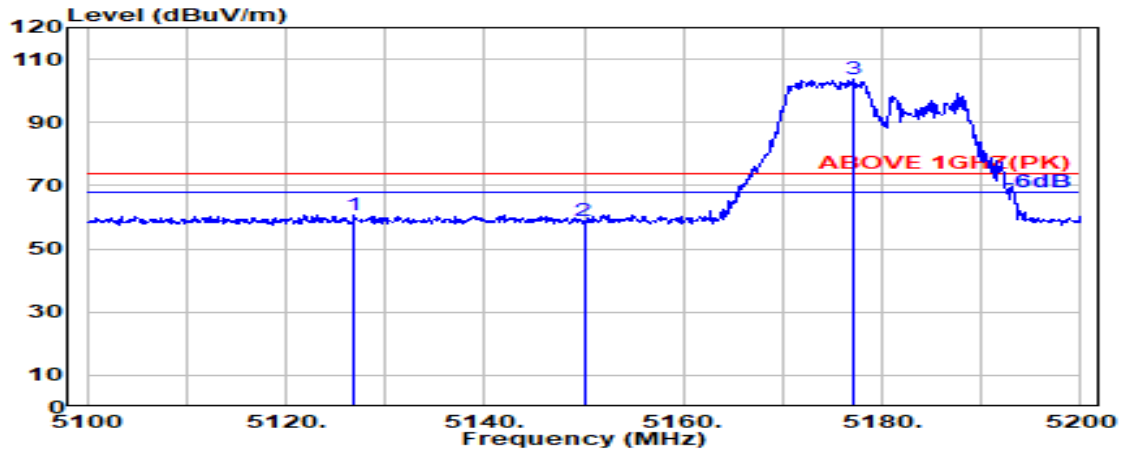

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.800	33.45	8.35	39.27	58.07	60.60	74.00	13.40	Peak
5150.000	33.50	8.37	39.27	56.27	58.87	74.00	15.13	Peak
@ 5177.000	33.66	8.40	39.27	100.88	103.67	---	---	Peak

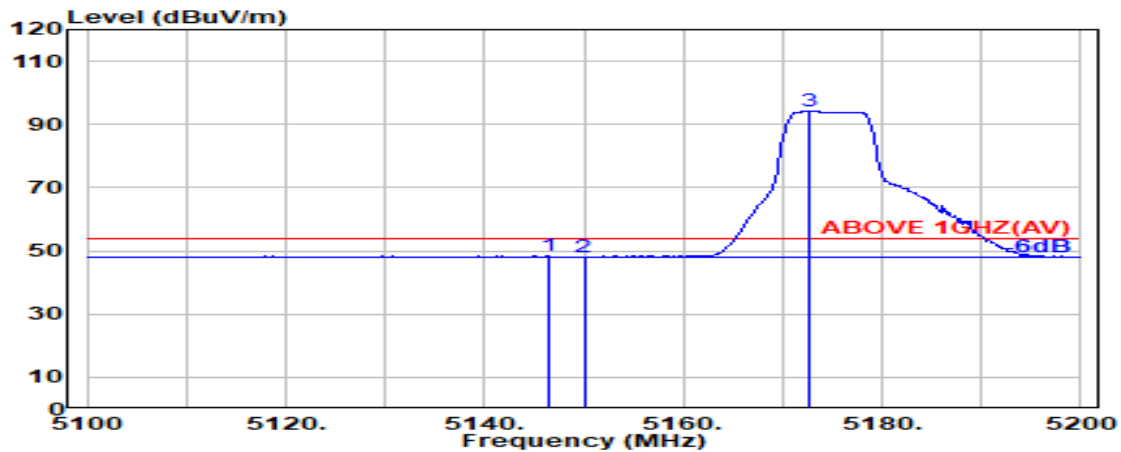


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	33.49	8.37	39.27	45.80	48.39	54.00	5.61	Average
5150.000	33.50	8.37	39.27	45.62	48.22	54.00	5.78	Average
@ 5172.700	33.64	8.40	39.27	91.64	94.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

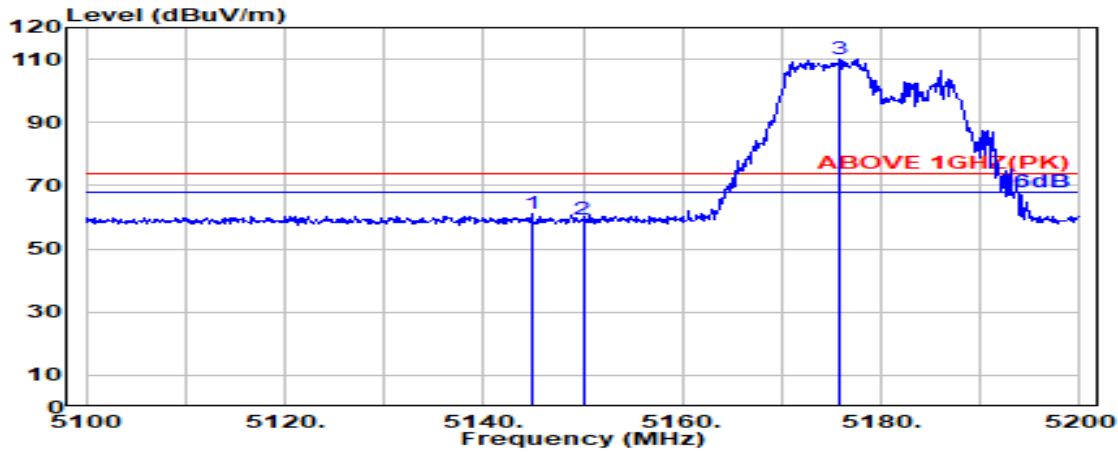

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	33.49	8.37	39.27	58.36	60.95	74.00	13.05	Peak
5150.000	33.50	8.37	39.27	56.70	59.30	74.00	14.70	Peak
@ 5175.900	33.66	8.40	39.27	107.38	110.17	---	---	Peak

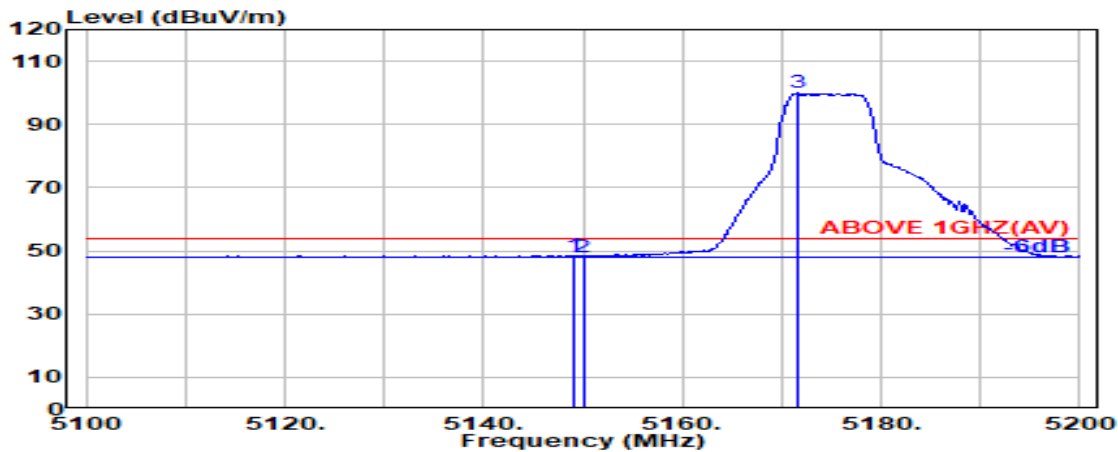


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.27	45.97	48.57	54.00	5.43	Average
5150.000	33.50	8.37	39.27	45.60	48.20	54.00	5.80	Average
@ 5171.600	33.63	8.40	39.27	97.18	99.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

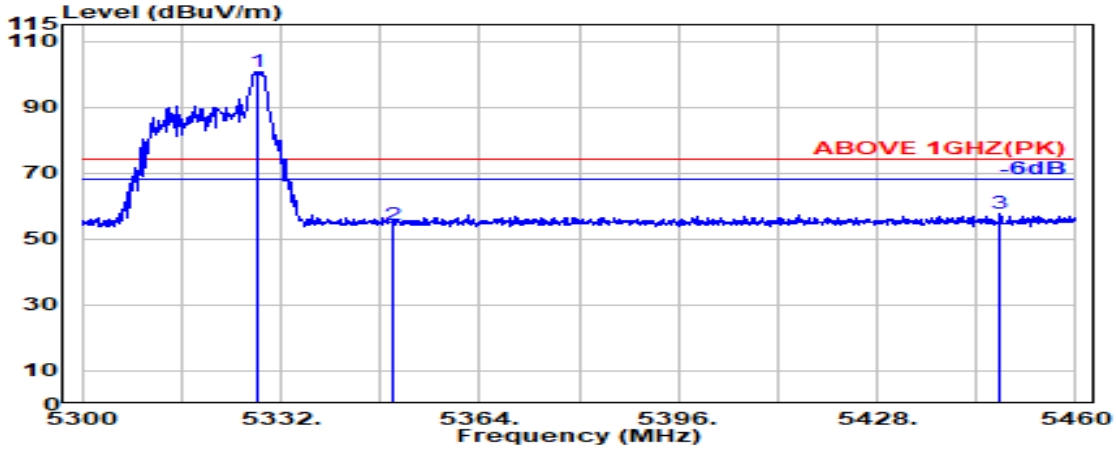

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.100	33.74	8.55	39.26	97.79	100.83	---	---	Peak
5350.000	33.70	8.57	39.26	51.18	54.19	74.00	19.81	Peak
5447.700	34.00	8.67	39.25	54.24	57.65	74.00	16.35	Peak

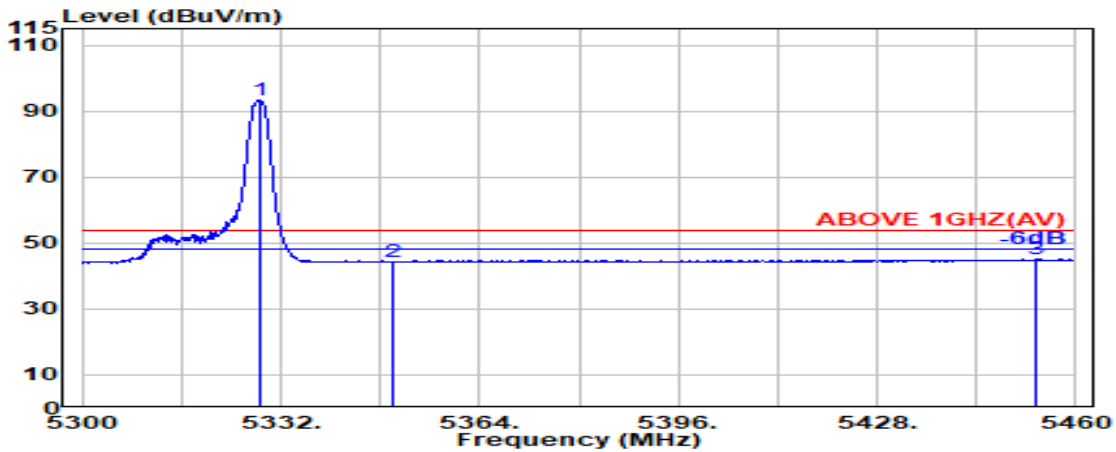


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.74	8.55	39.26	90.30	93.33	---	---	Average
5350.000	33.70	8.57	39.26	41.28	44.29	54.00	9.71	Average
5453.500	34.01	8.67	39.25	41.60	45.02	54.00	8.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

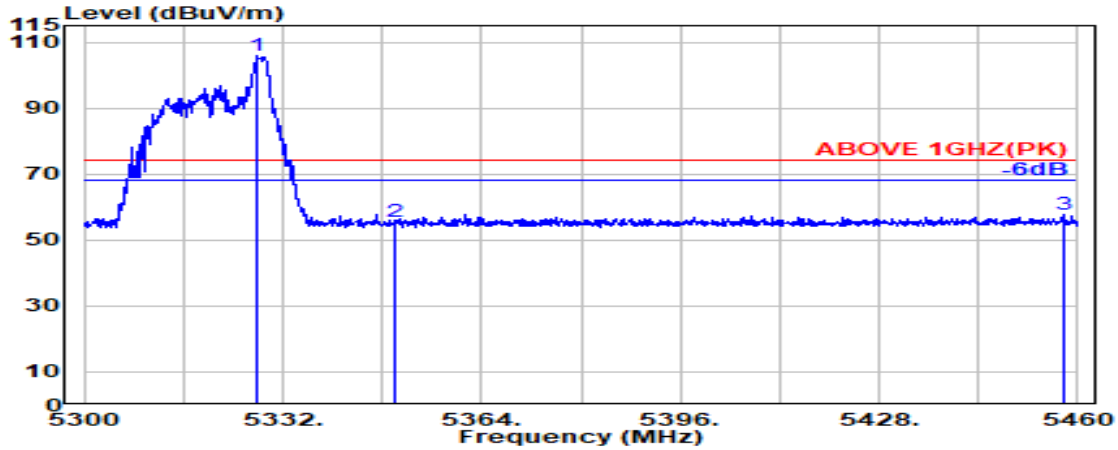

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.74	8.55	39.26	102.71	105.74	---	---	Peak
5350.000	33.70	8.57	39.26	52.50	55.51	74.00	18.49	Peak
5457.700	34.02	8.68	39.25	54.15	57.59	74.00	16.41	Peak

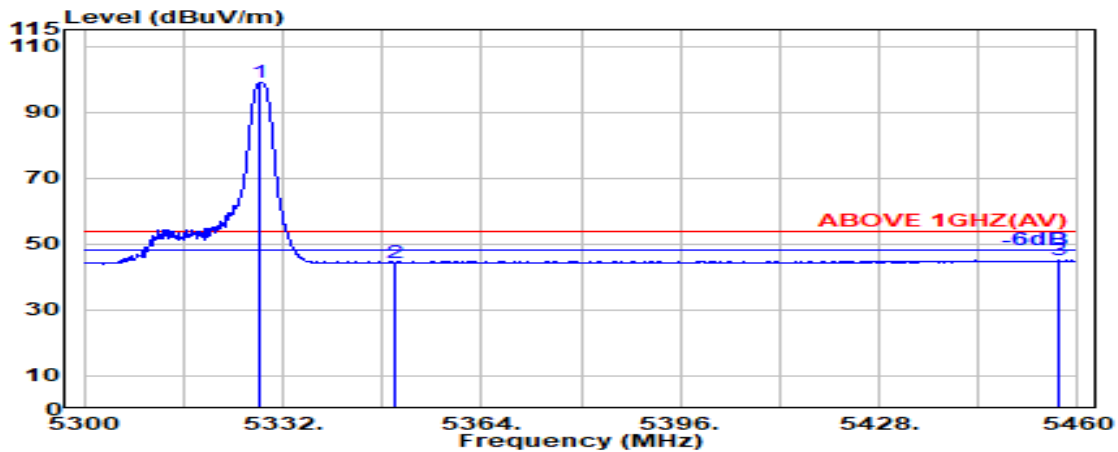


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.74	8.55	39.26	95.99	99.02	---	---	Average
5350.000	33.70	8.57	39.26	41.33	44.35	54.00	9.65	Average
5456.800	34.01	8.68	39.25	41.62	45.05	54.00	8.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

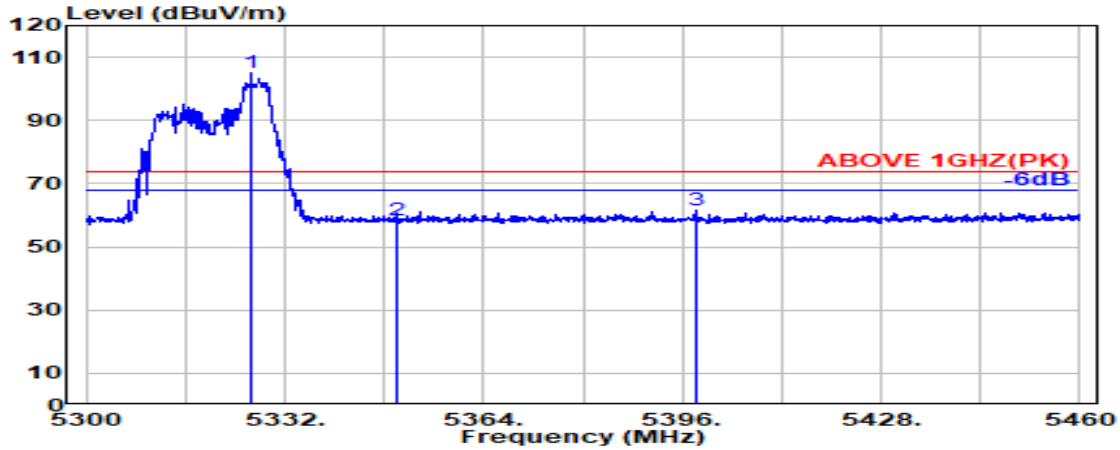

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.600	33.75	8.55	39.26	101.86	104.89	---	---	Peak
5350.000	33.70	8.57	39.26	55.36	58.37	74.00	15.63	Peak
5398.200	33.89	8.62	39.26	58.11	61.36	74.00	12.64	Peak

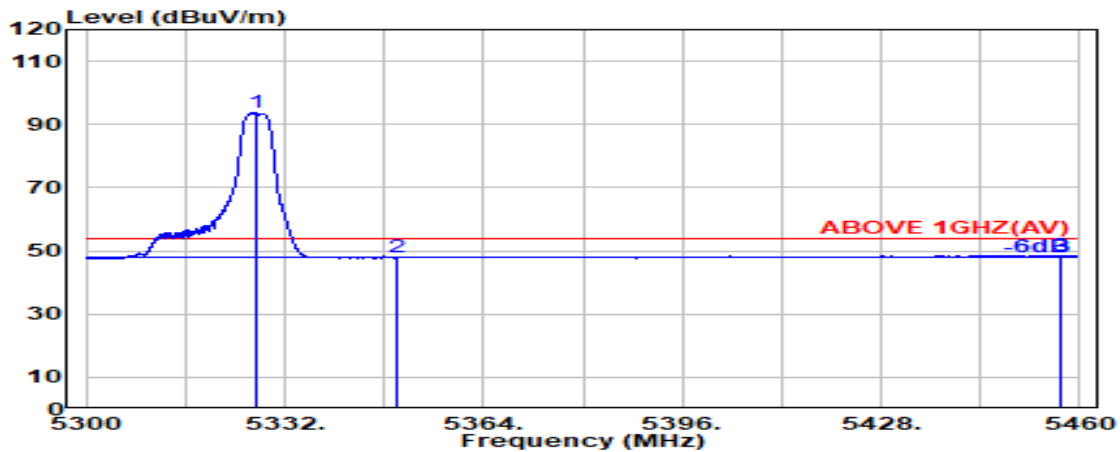


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.400	33.75	8.55	39.26	90.67	93.71	---	---	Average
5350.000	33.70	8.57	39.26	44.94	47.95	54.00	6.05	Average
5457.100	34.01	8.68	39.25	45.07	48.50	54.00	5.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

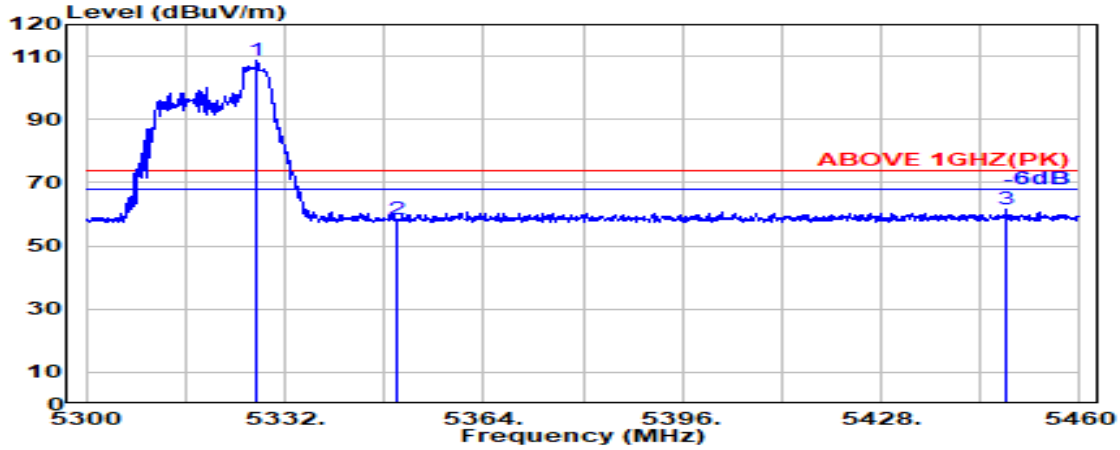

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.500	33.74	8.55	39.26	105.63	108.66	---	---	Peak
5350.000	33.70	8.57	39.26	55.23	58.24	74.00	15.76	Peak
5448.300	34.00	8.67	39.25	58.07	61.48	74.00	12.52	Peak

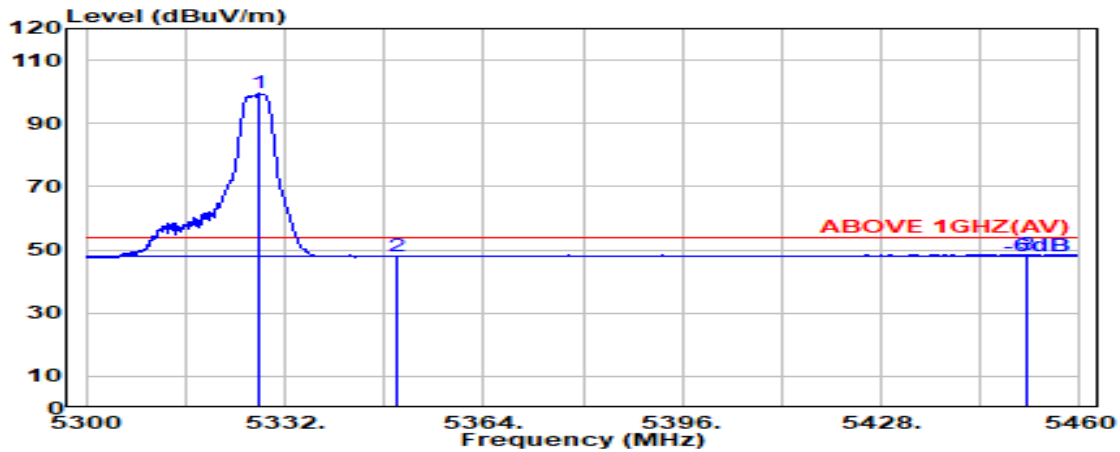


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	33.74	8.55	39.26	96.42	99.45	---	---	Average
5350.000	33.70	8.57	39.26	44.87	47.88	54.00	6.12	Average
5451.500	34.00	8.67	39.25	45.10	48.52	54.00	5.48	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

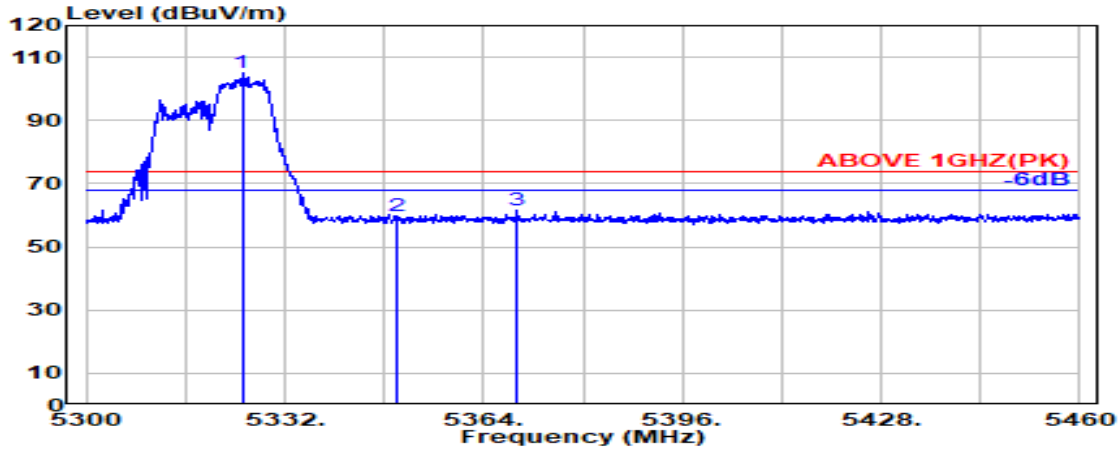

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.100	33.75	8.55	39.26	102.24	105.28	---	---	Peak
5350.000	33.70	8.57	39.26	56.94	59.96	74.00	14.04	Peak
5369.400	33.78	8.59	39.26	58.26	61.37	74.00	12.63	Peak

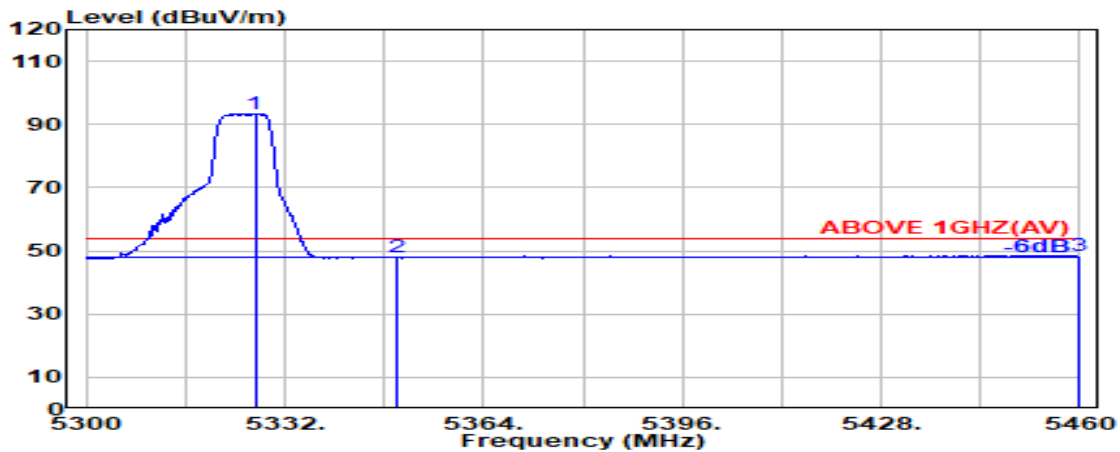


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.75	8.55	39.26	90.42	93.46	---	---	Average
5350.000	33.70	8.57	39.26	44.81	47.82	54.00	6.18	Average
5460.000	34.02	8.68	39.25	45.15	48.60	54.00	5.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

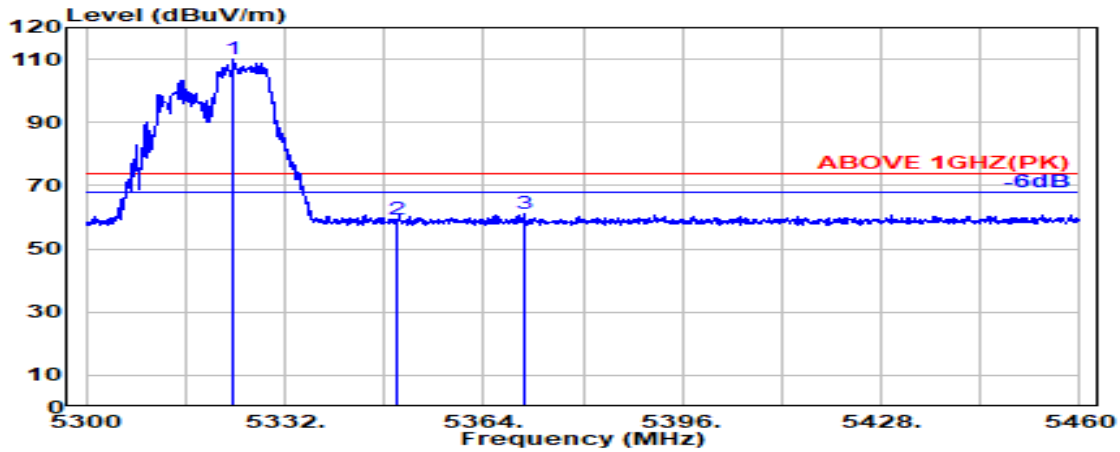

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	33.75	8.55	39.26	106.91	109.95	---	---	Peak
5350.000	33.70	8.57	39.26	56.20	59.22	74.00	14.78	Peak
5370.400	33.78	8.59	39.26	57.80	60.92	74.00	13.08	Peak

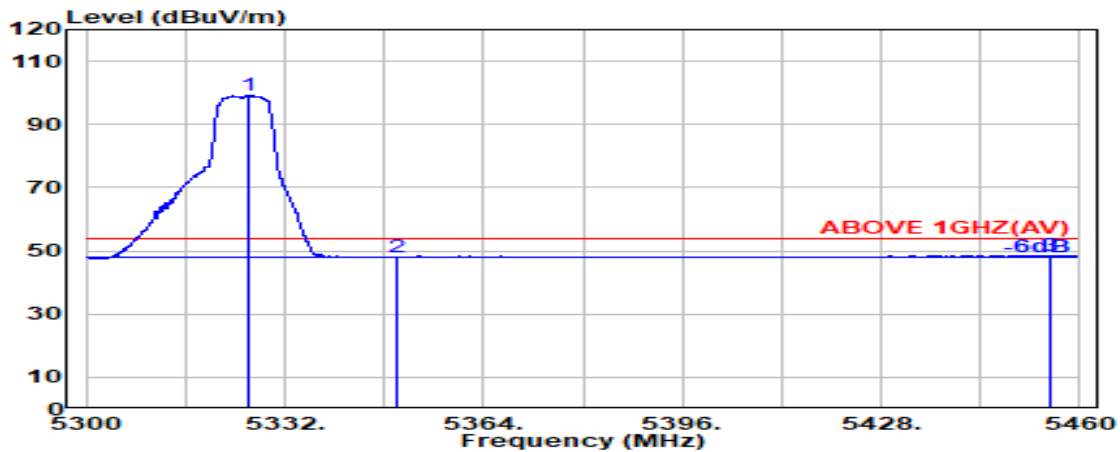


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.100	33.75	8.55	39.26	96.18	99.22	---	---	Average
5350.000	33.70	8.57	39.26	44.88	47.89	54.00	6.11	Average
5455.300	34.01	8.67	39.25	45.17	48.60	54.00	5.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

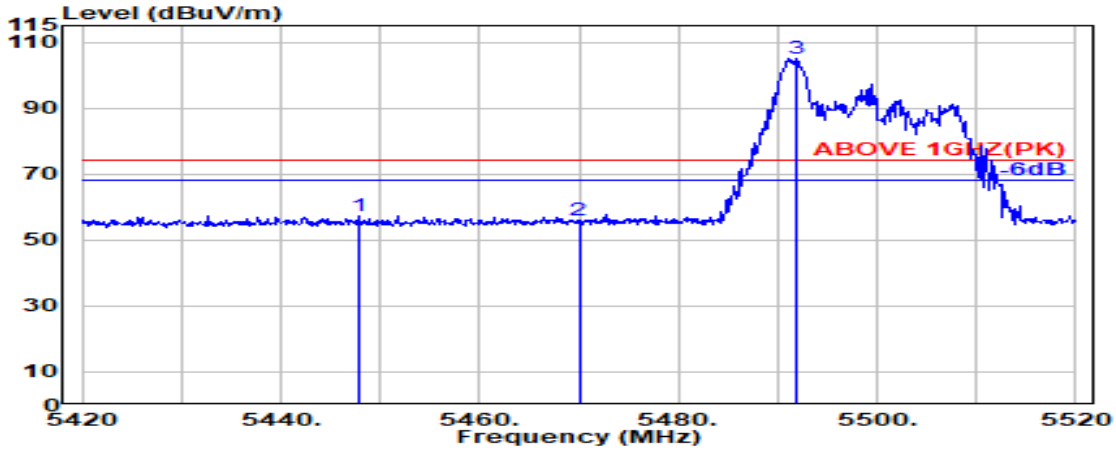

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.900	34.00	8.67	39.25	53.96	57.37	74.00	16.63	Peak
5470.000	34.04	8.69	39.25	52.52	56.00	74.00	18.00	Peak
@ 5492.000	34.08	8.71	39.25	101.54	105.08	---	---	Peak

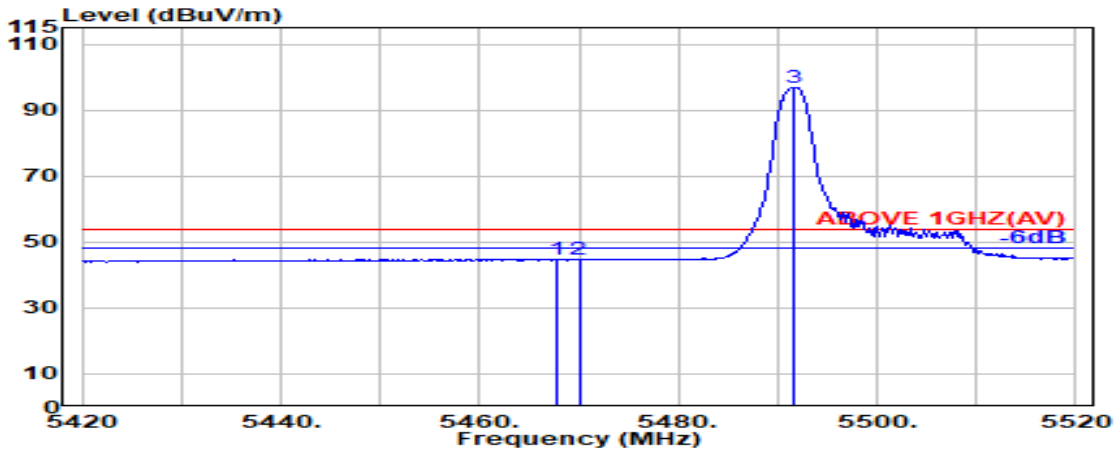


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.25	41.33	44.80	54.00	9.20	Average
5470.000	34.04	8.69	39.25	41.04	44.52	54.00	9.48	Average
@ 5491.700	34.08	8.71	39.25	93.38	96.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

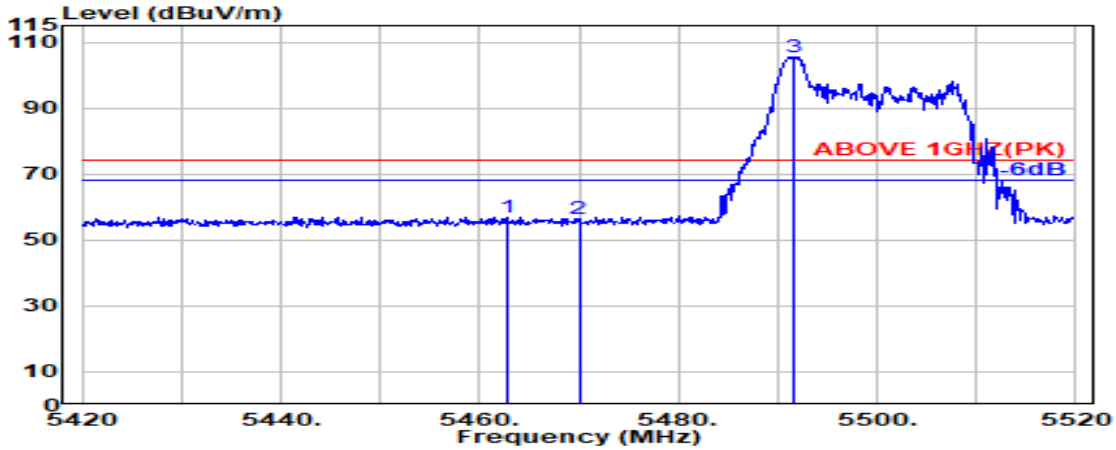

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.900	34.03	8.68	39.25	53.57	57.03	74.00	16.97	Peak
5470.000	34.04	8.69	39.25	52.84	56.31	74.00	17.69	Peak
@ 5491.500	34.08	8.71	39.25	102.12	105.66	---	---	Peak

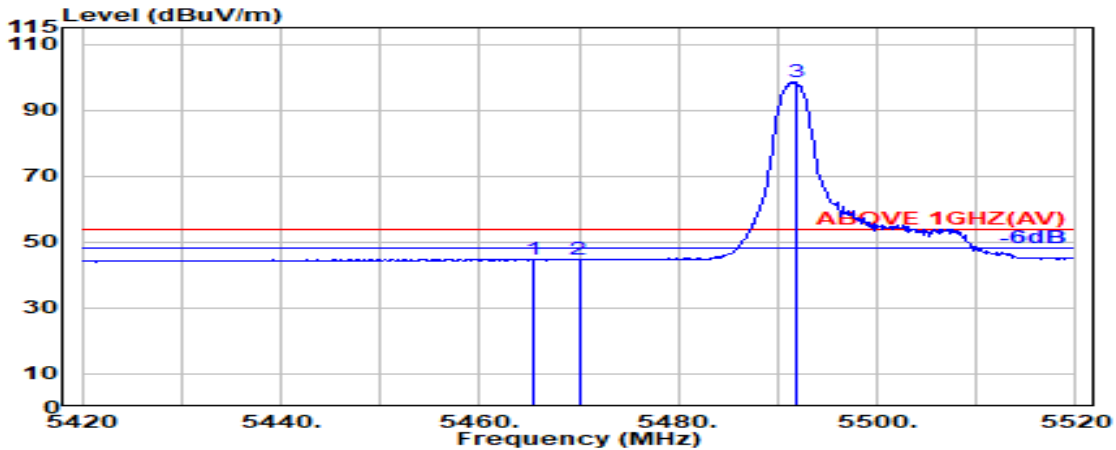


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.25	41.37	44.83	54.00	9.17	Average
5470.000	34.04	8.69	39.25	41.08	44.56	54.00	9.44	Average
@ 5491.800	34.08	8.71	39.25	95.04	98.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section..

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

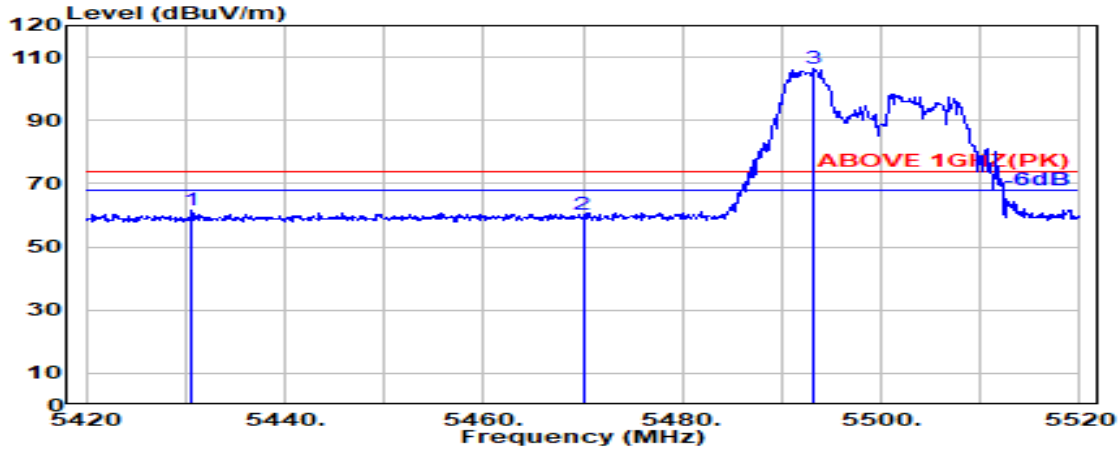

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.700	33.96	8.65	39.25	58.03	61.39	74.00	12.61	Peak
5470.000	34.04	8.69	39.25	56.63	60.11	74.00	13.89	Peak
@ 5493.300	34.09	8.71	39.25	102.91	106.45	---	---	Peak

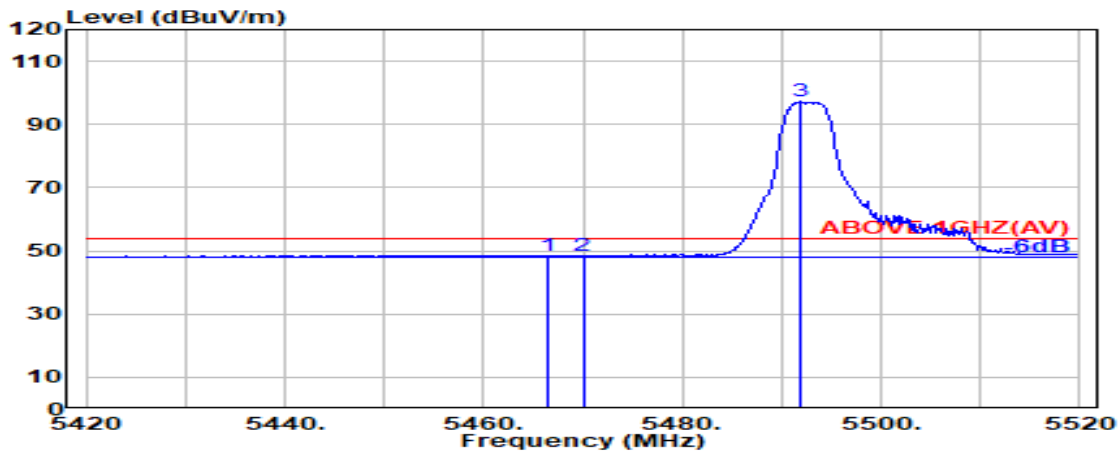


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.03	8.68	39.25	45.20	48.66	54.00	5.34	Average
5470.000	34.04	8.69	39.25	45.07	48.55	54.00	5.45	Average
@ 5491.800	34.08	8.71	39.25	93.60	97.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

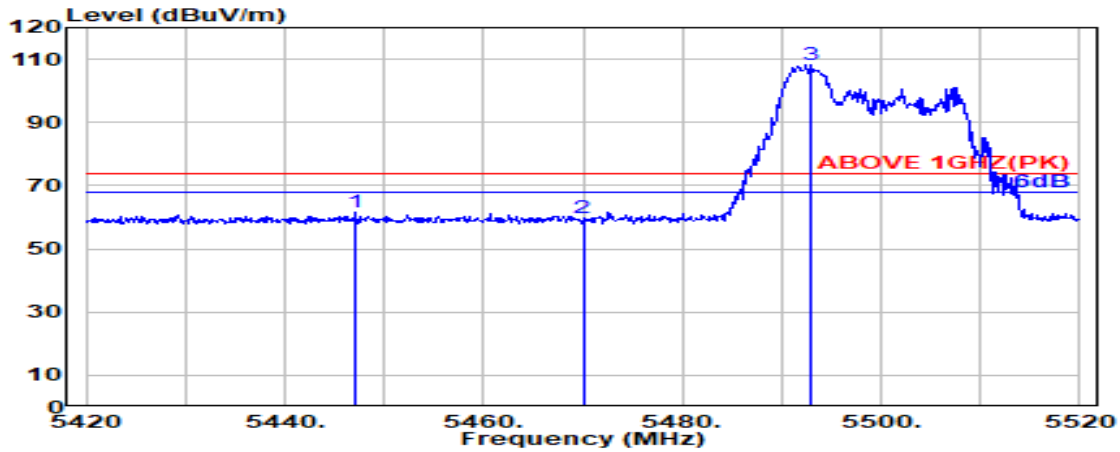

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.200	33.99	8.67	39.25	58.35	61.76	74.00	12.24	Peak
5470.000	34.04	8.69	39.25	56.41	59.88	74.00	14.12	Peak
@ 5493.000	34.09	8.71	39.25	104.78	108.33	---	---	Peak

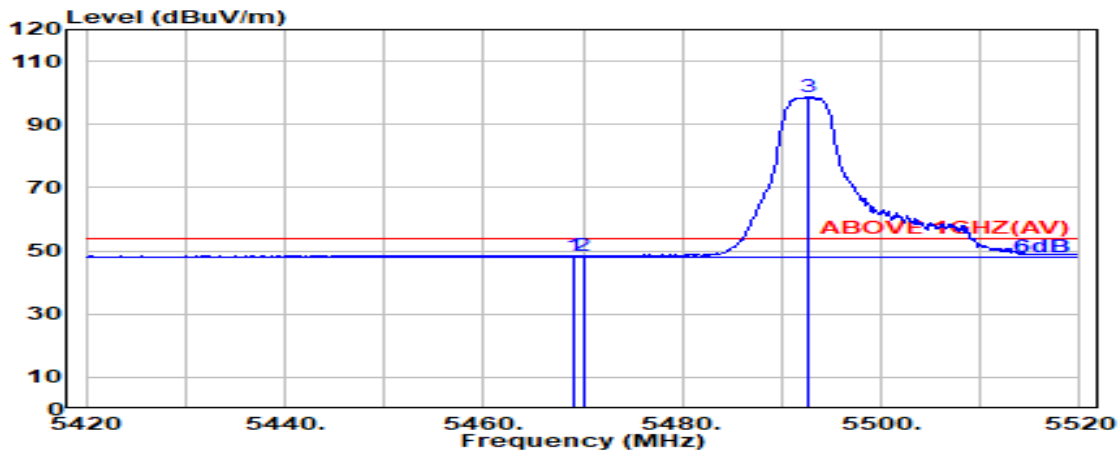


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.25	45.20	48.68	54.00	5.32	Average
5470.000	34.04	8.69	39.25	45.20	48.68	54.00	5.32	Average
@ 5492.700	34.09	8.71	39.25	95.17	98.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

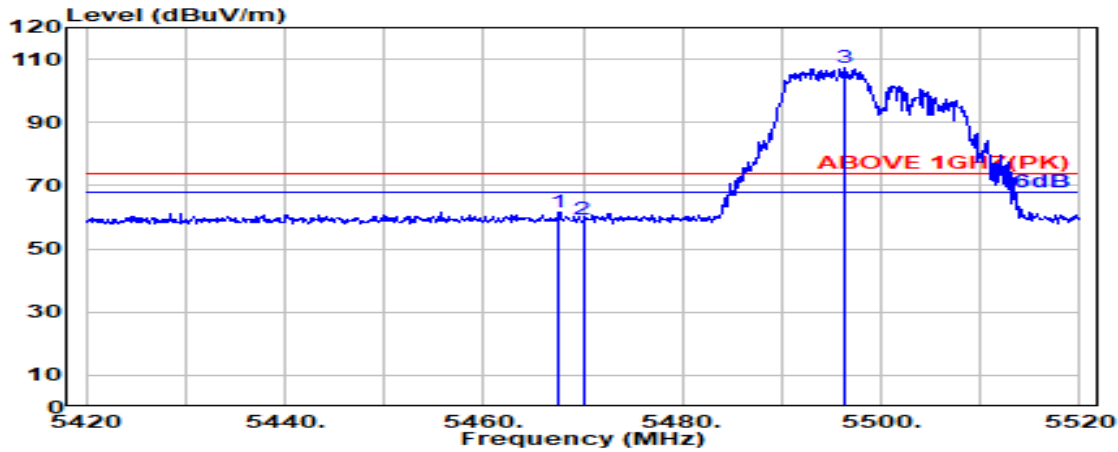

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.25	58.32	61.79	74.00	12.21	Peak
5470.000	34.04	8.69	39.25	55.87	59.35	74.00	14.65	Peak
@ 5496.300	34.09	8.71	39.25	103.80	107.36	---	---	Peak

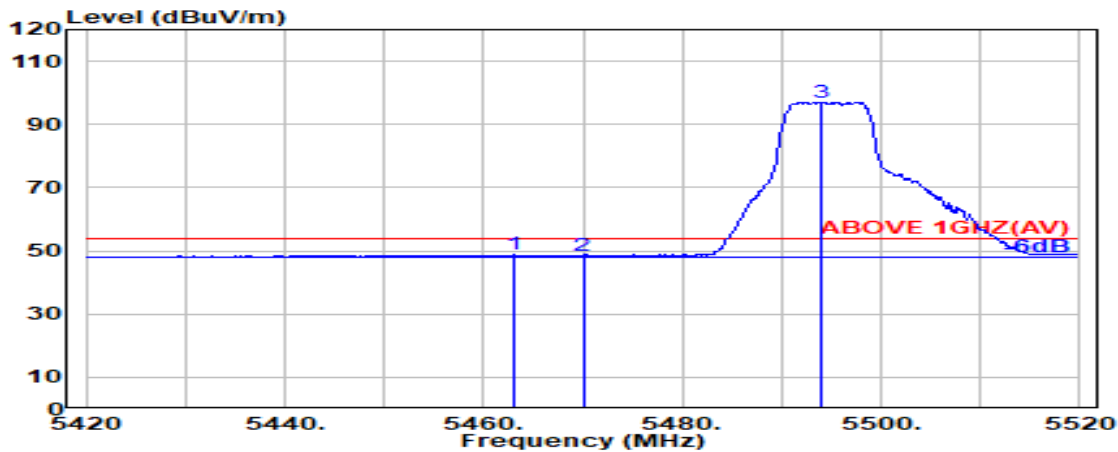


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.000	34.03	8.68	39.25	45.34	48.79	54.00	5.21	Average
5470.000	34.04	8.69	39.25	45.10	48.57	54.00	5.43	Average
@ 5494.100	34.09	8.71	39.25	93.44	96.99	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

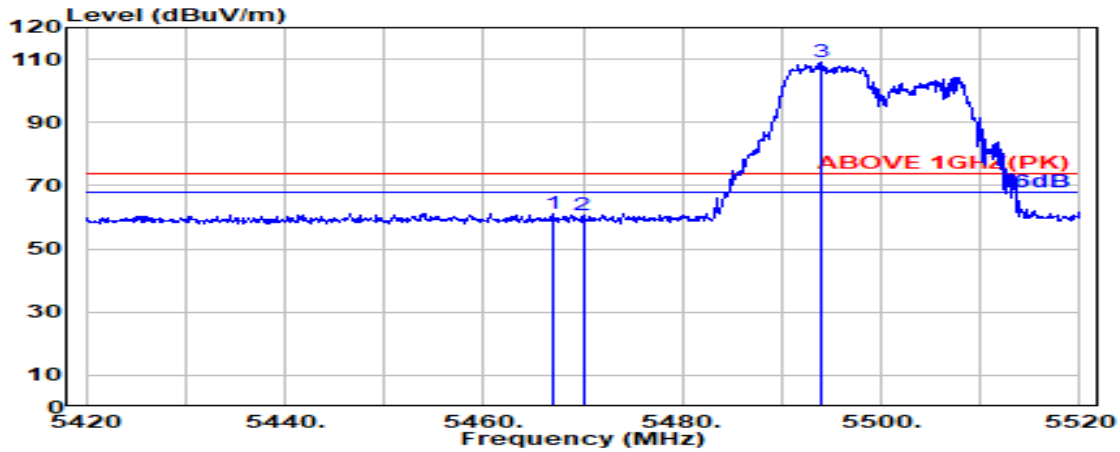

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.25	57.88	61.35	74.00	12.65	Peak
5470.000	34.04	8.69	39.25	57.35	60.83	74.00	13.17	Peak
@ 5494.100	34.09	8.71	39.25	105.44	108.99	---	---	Peak

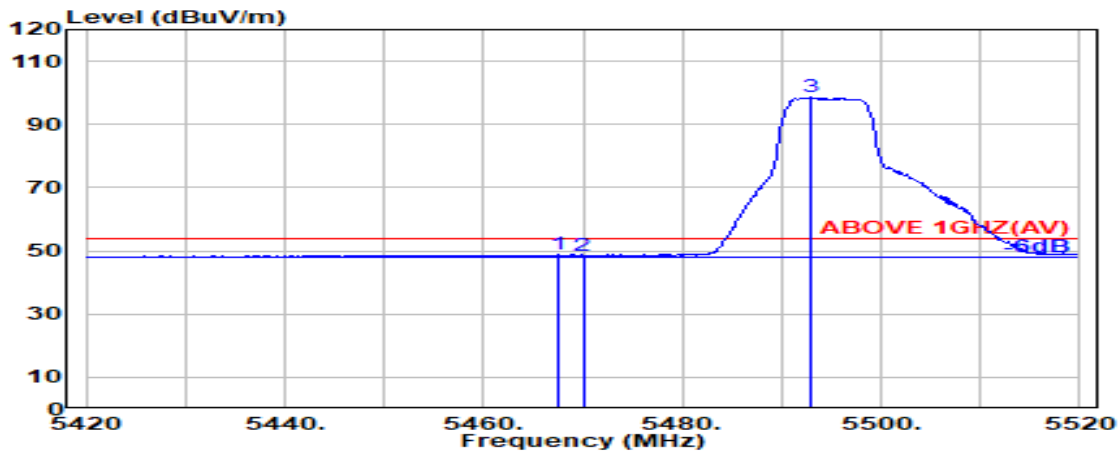


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.25	45.22	48.69	54.00	5.31	Average
5470.000	34.04	8.69	39.25	45.12	48.60	54.00	5.40	Average
@ 5492.900	34.09	8.71	39.25	94.97	98.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

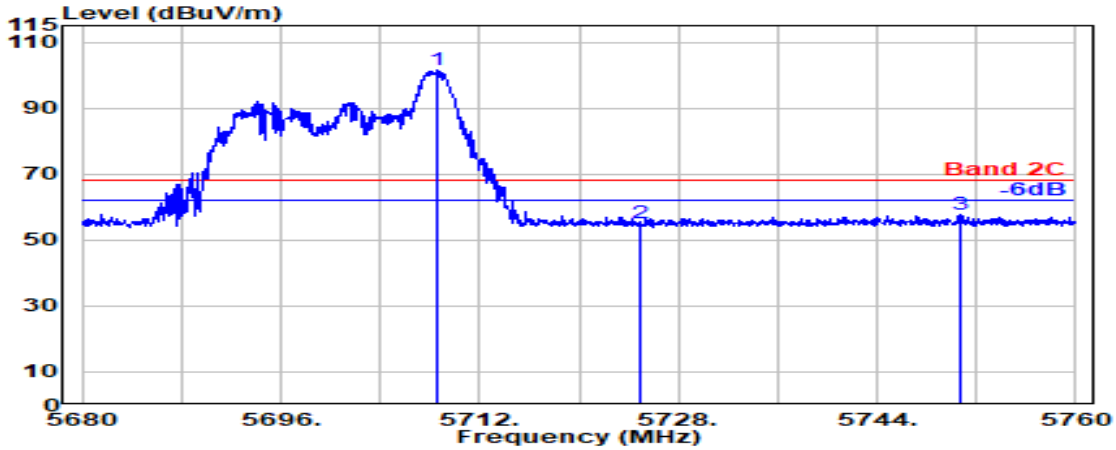

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.600	33.60	8.91	39.29	98.28	101.50	---	---	Peak
5725.000	33.60	8.93	39.29	51.99	55.22	68.20	12.98	Peak
5750.800	33.60	8.95	39.30	54.27	57.52	68.20	10.68	Peak

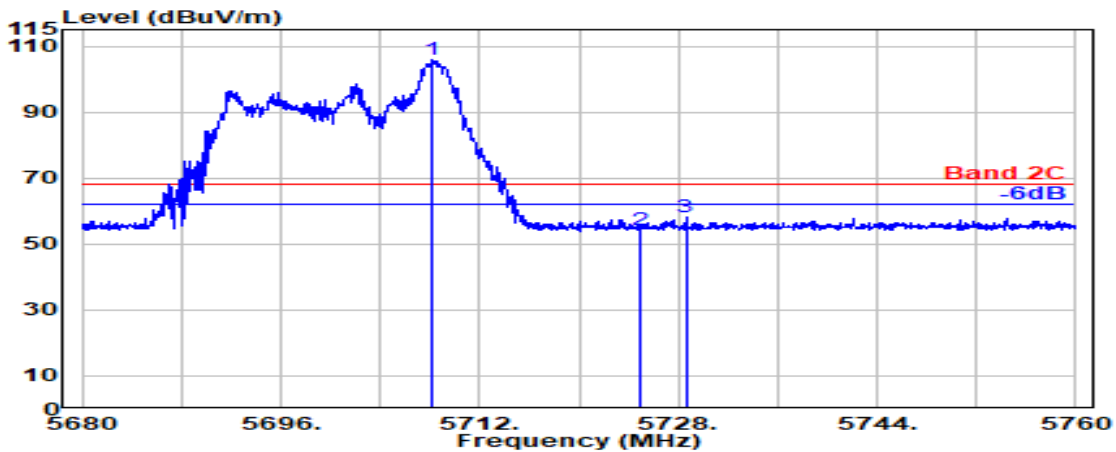


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.200	33.60	8.91	39.29	102.54	105.76	---	---	Peak
5725.000	33.60	8.93	39.29	51.17	54.40	68.20	13.80	Peak
5728.600	33.60	8.93	39.29	54.88	58.11	68.20	10.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

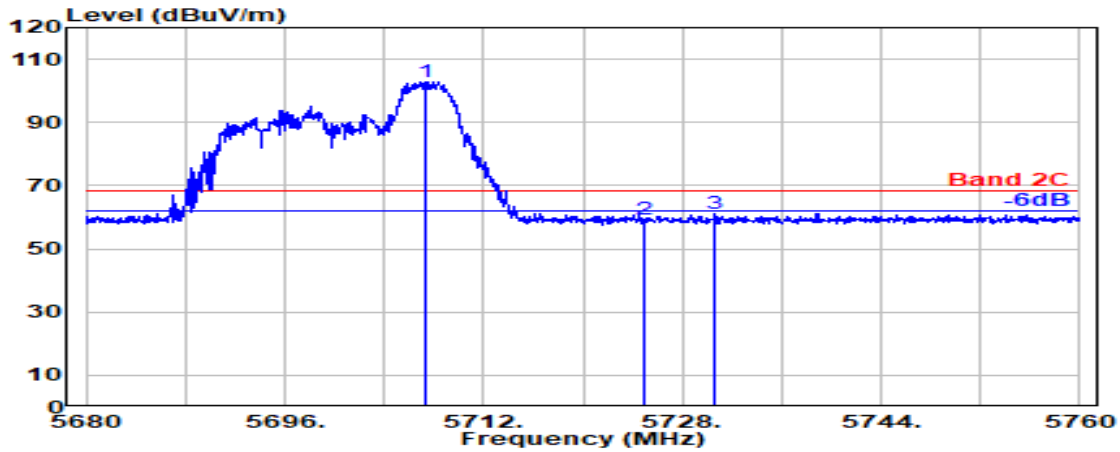

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.400	33.60	8.91	39.29	99.73	102.95	---	---	Peak
5725.000	33.60	8.93	39.29	56.25	59.49	68.20	8.71	Peak
5730.600	33.60	8.93	39.29	57.89	61.13	68.20	7.07	Peak

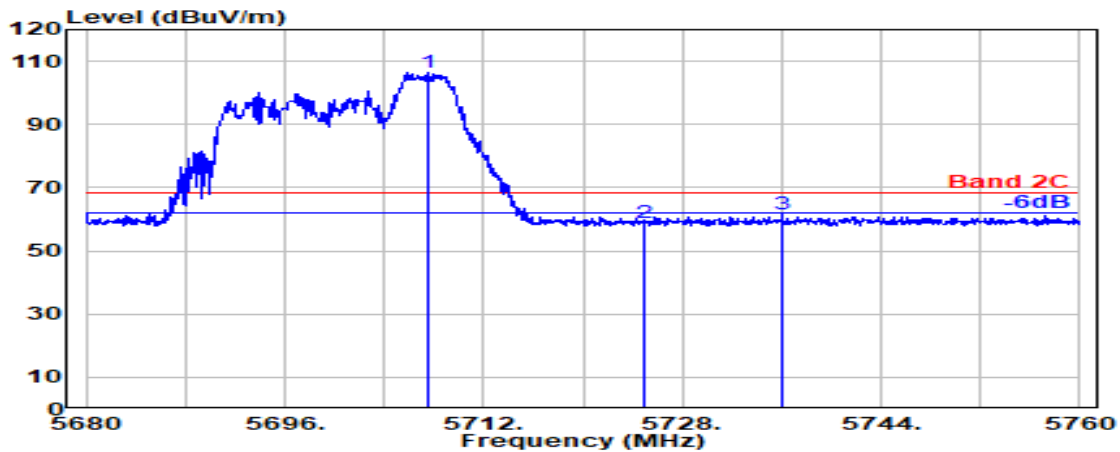


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.450	33.60	8.91	39.29	103.42	106.64	---	---	Peak
5725.000	33.60	8.93	39.29	55.56	58.79	68.20	9.41	Peak
5736.050	33.60	8.94	39.29	58.28	61.52	68.20	6.68	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

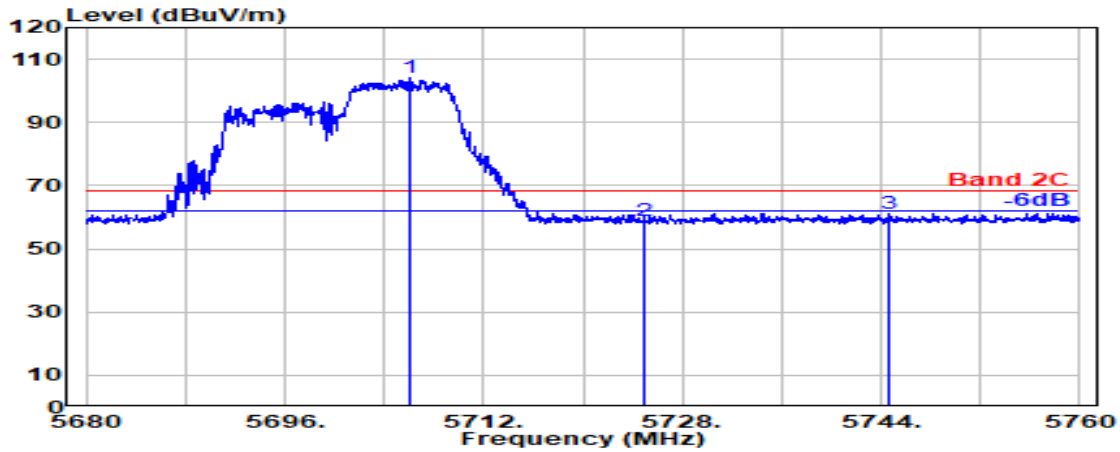

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.050	33.60	8.91	39.29	101.03	104.25	---	---	Peak
5725.000	33.60	8.93	39.29	55.43	58.67	68.20	9.53	Peak
5744.600	33.60	8.94	39.30	58.05	61.30	68.20	6.90	Peak

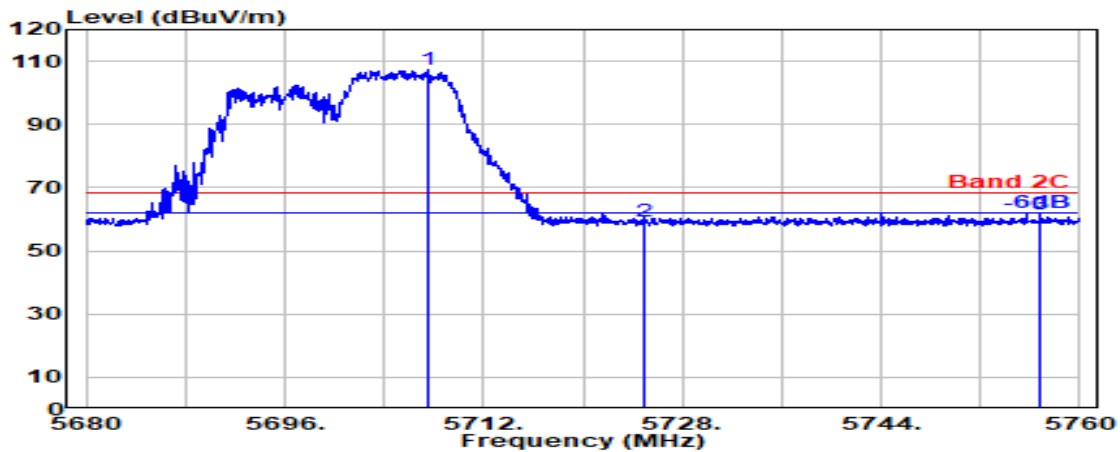


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.550	33.60	8.91	39.29	104.00	107.22	---	---	Peak
5725.000	33.60	8.93	39.29	56.07	59.30	68.20	8.90	Peak
5756.800	33.63	8.95	39.30	58.49	61.77	68.20	6.43	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

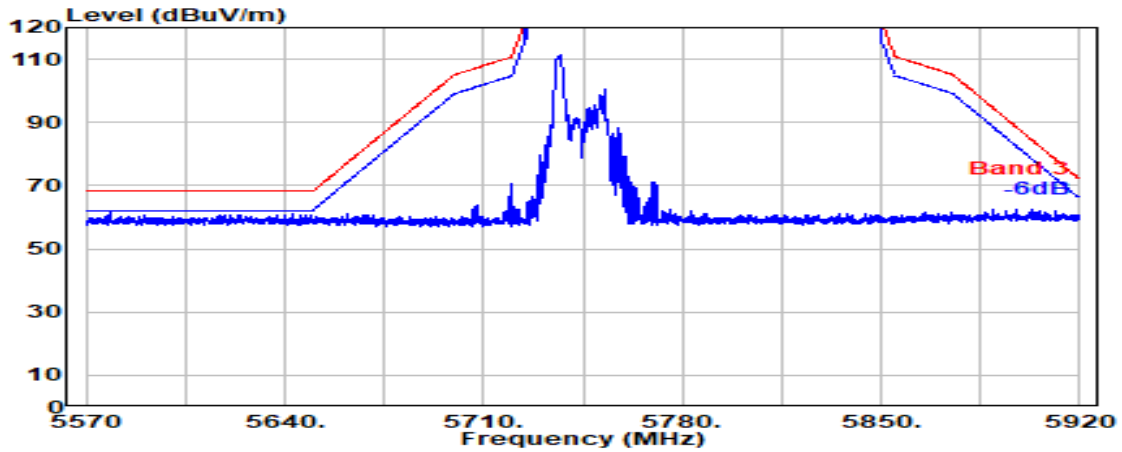


Antenna at Vertical Polarization

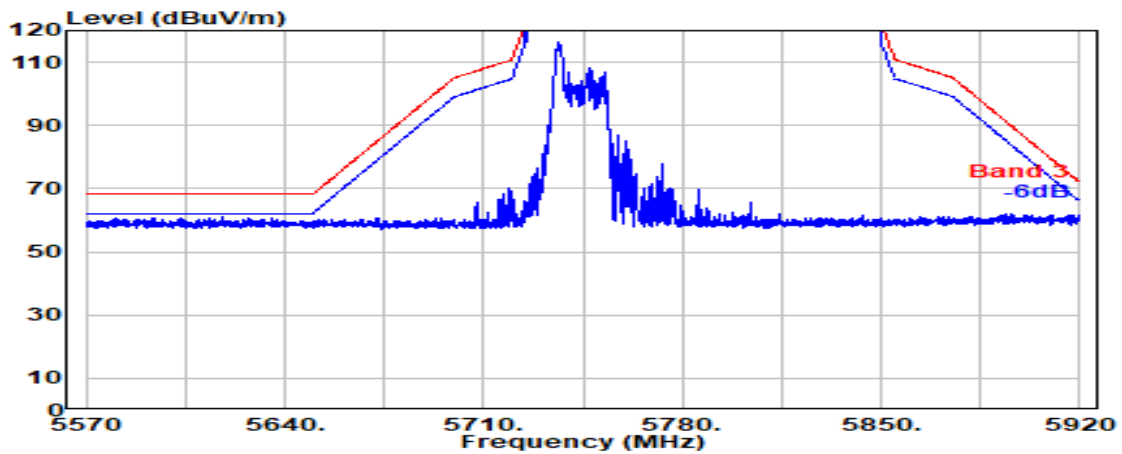


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

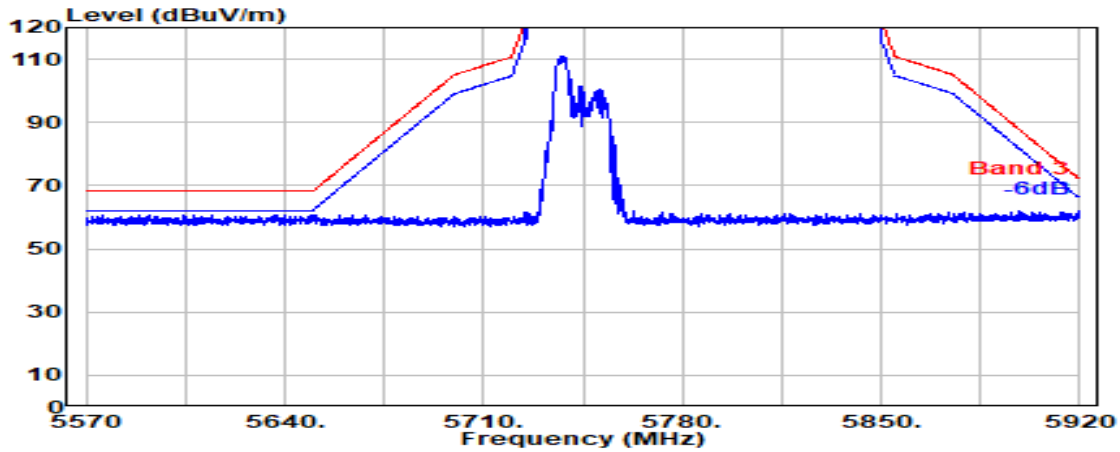


Antenna at Vertical Polarization

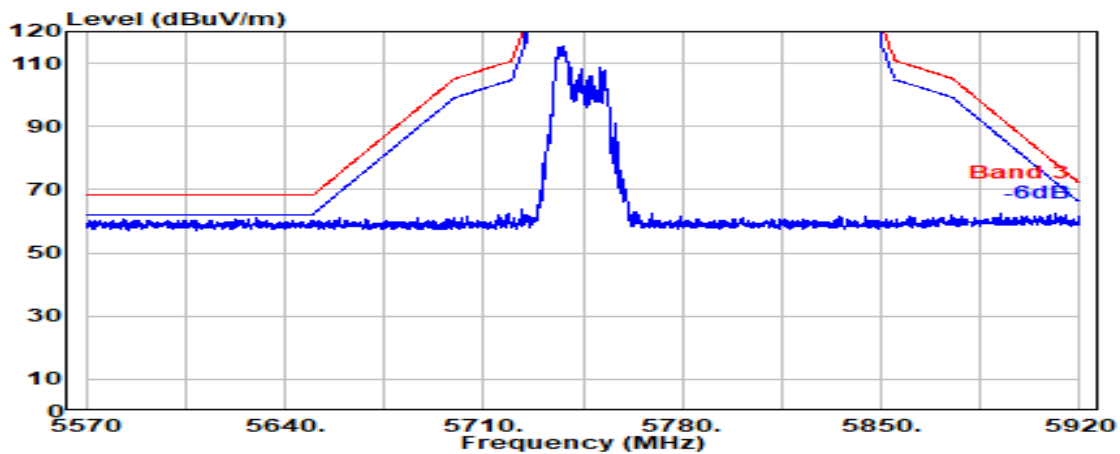


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

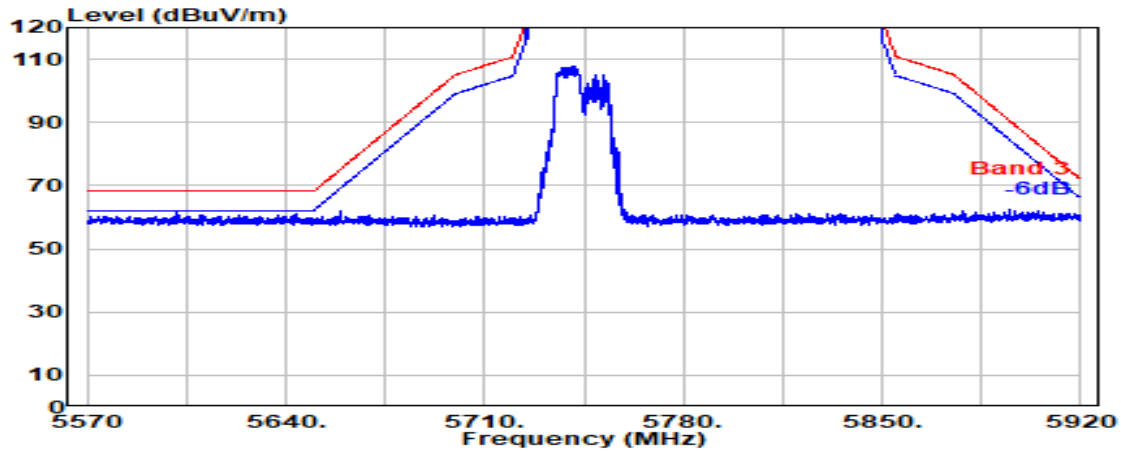


Antenna at Vertical Polarization

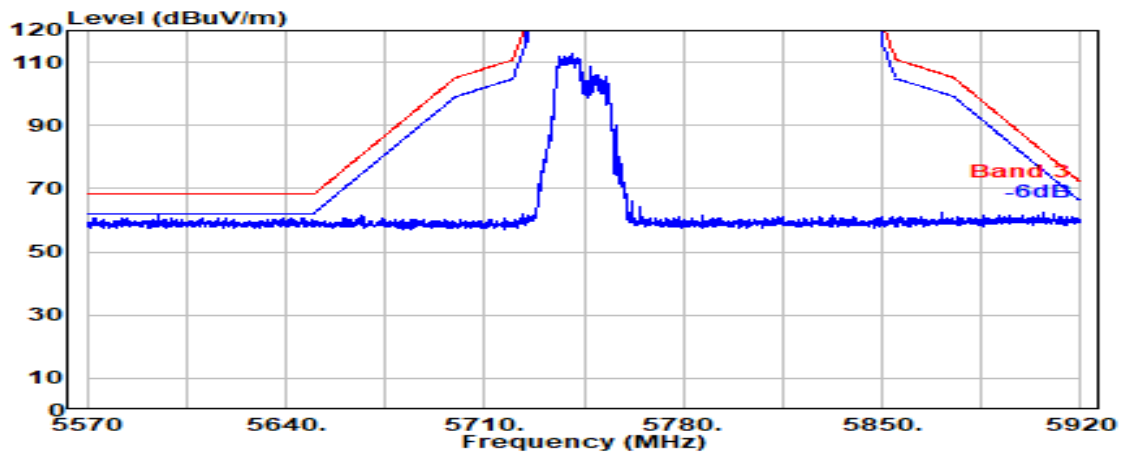


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

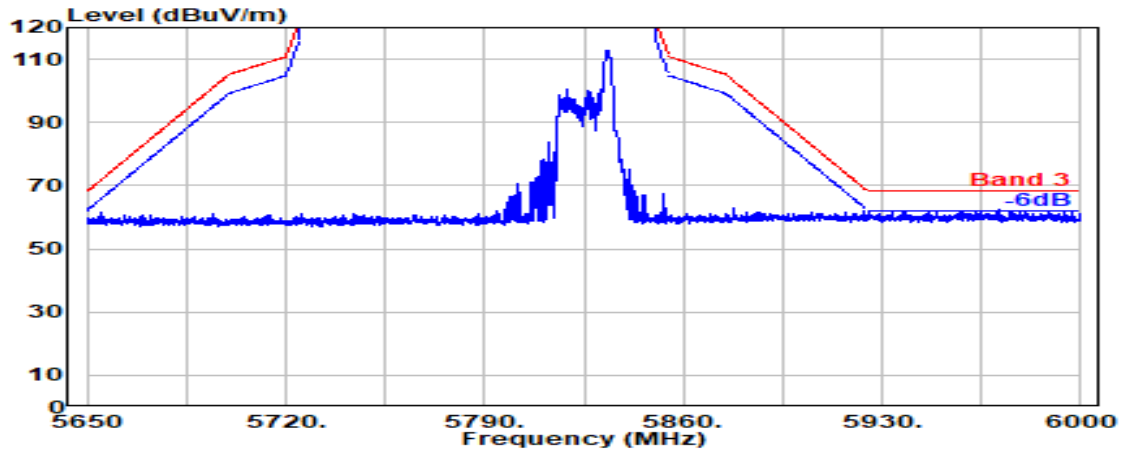

Antenna at Vertical Polarization

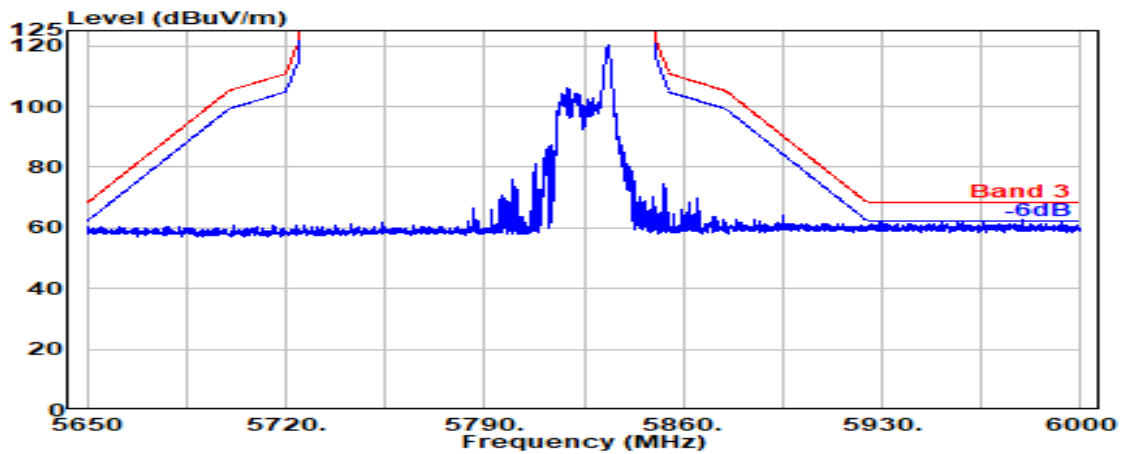


Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

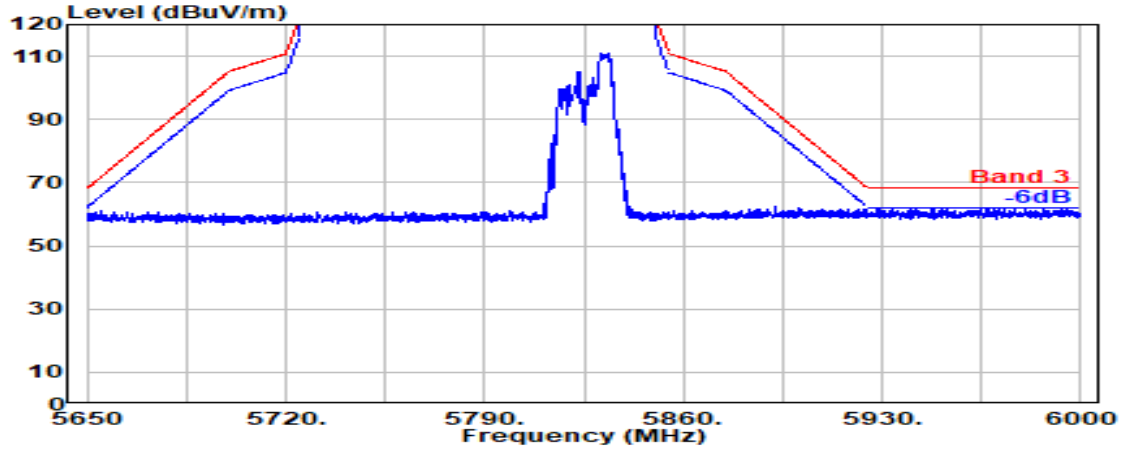


Antenna at Vertical Polarization

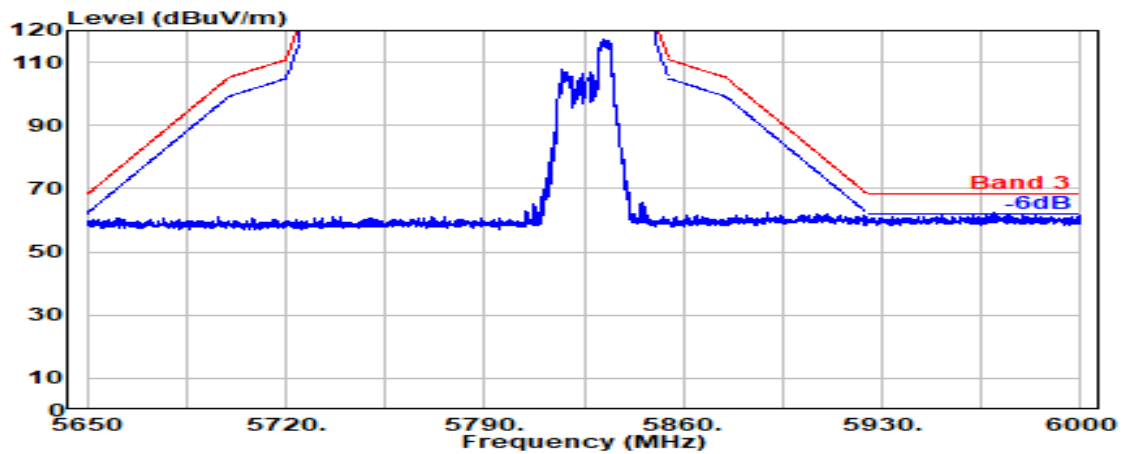


Mode	802.11be-EHT20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz


Antenna at Horizontal Polarization

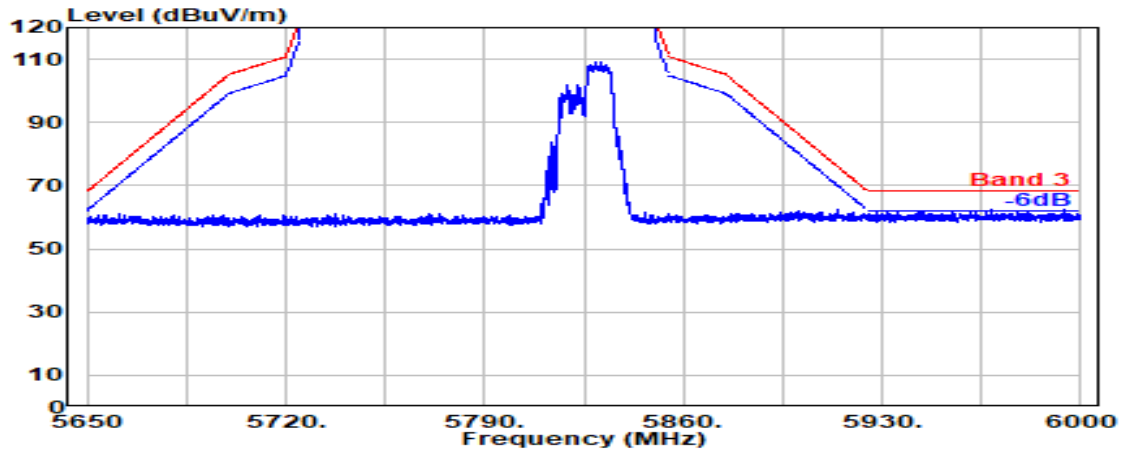

Antenna at Vertical Polarization

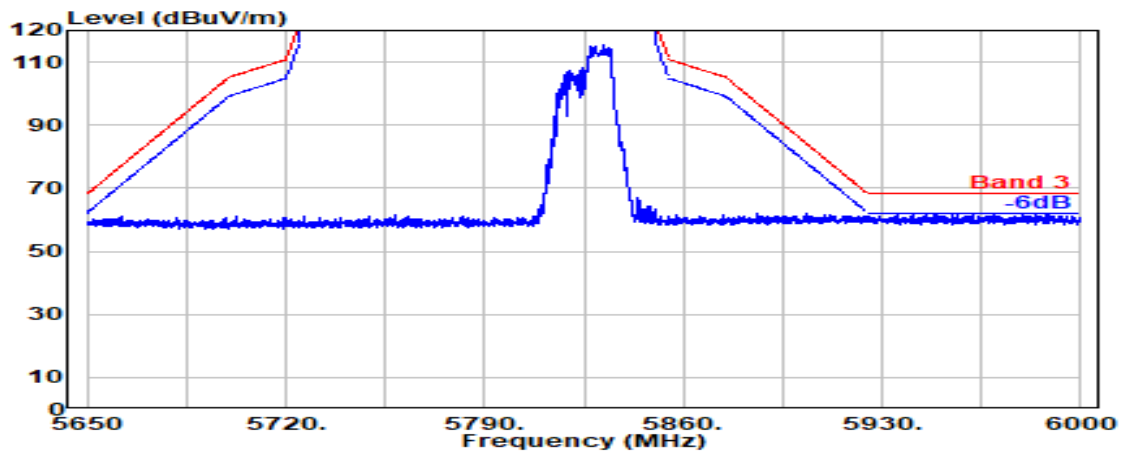


Mode	802.11be-EHT40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

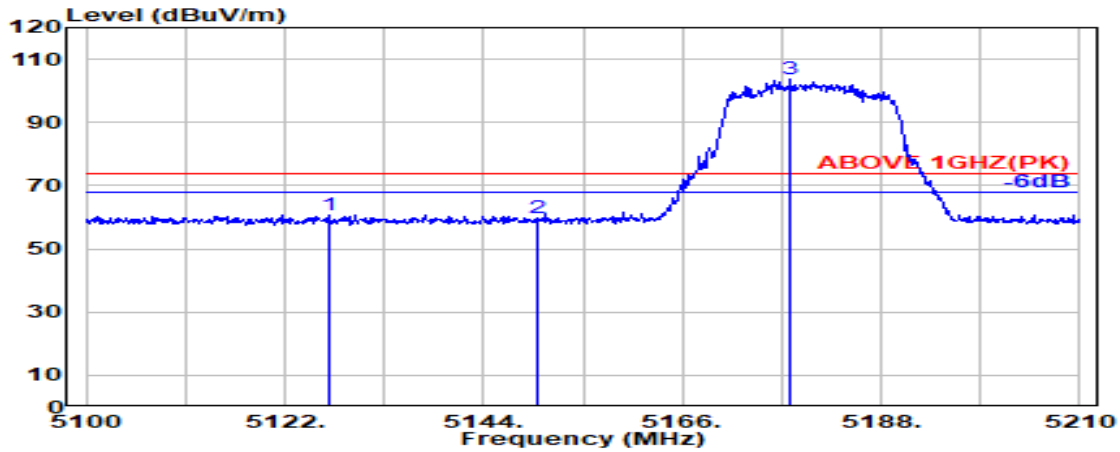

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.900	33.45	8.35	39.27	58.22	60.75	74.00	13.25	Peak
5150.000	33.50	8.37	39.27	57.00	59.60	74.00	14.40	Peak
@ 5178.000	33.67	8.40	39.27	100.99	103.79	---	---	Peak

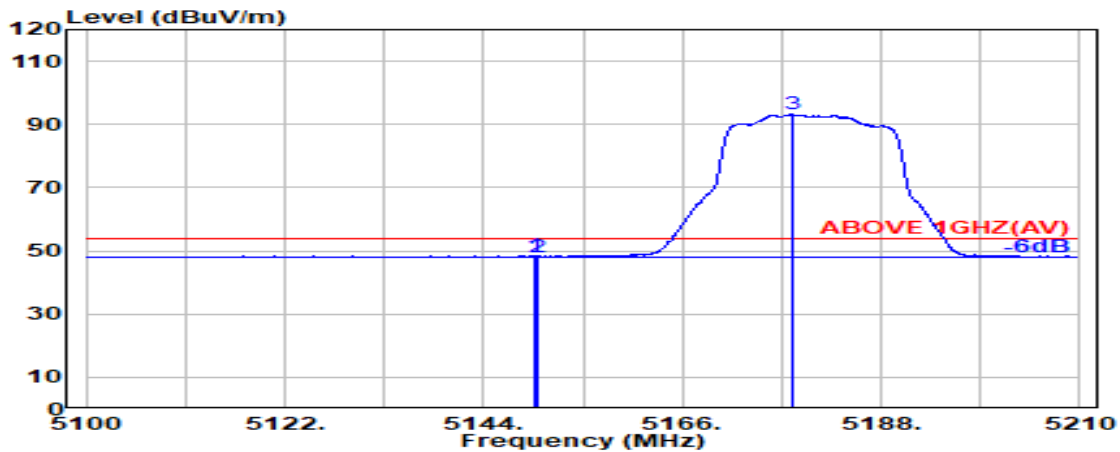


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.27	45.95	48.55	54.00	5.45	Average
5150.000	33.50	8.37	39.27	45.58	48.19	54.00	5.81	Average
@ 5178.100	33.67	8.40	39.27	90.37	93.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

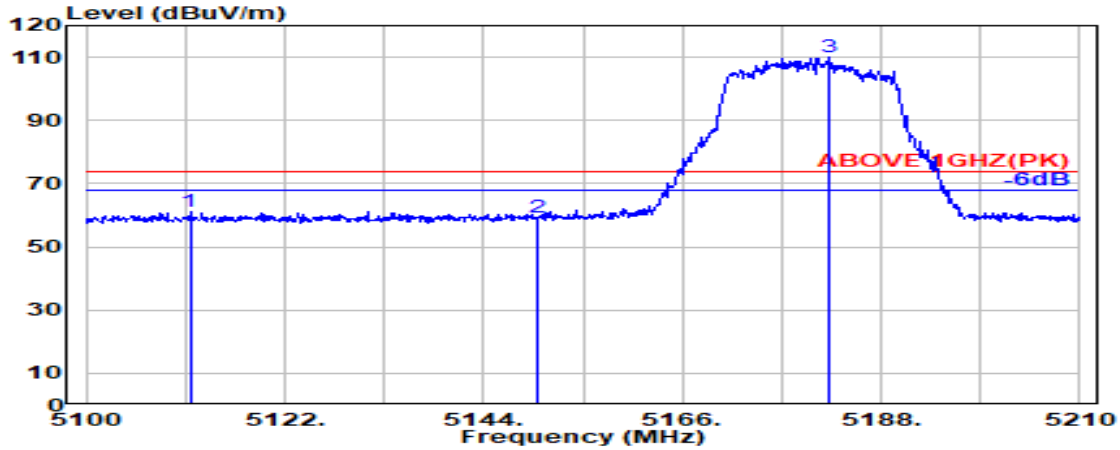

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.500	33.42	8.33	39.27	58.70	61.18	74.00	12.82	Peak
5150.000	33.50	8.37	39.27	56.52	59.13	74.00	14.87	Peak
@ 5182.100	33.69	8.41	39.27	107.13	109.96	---	---	Peak

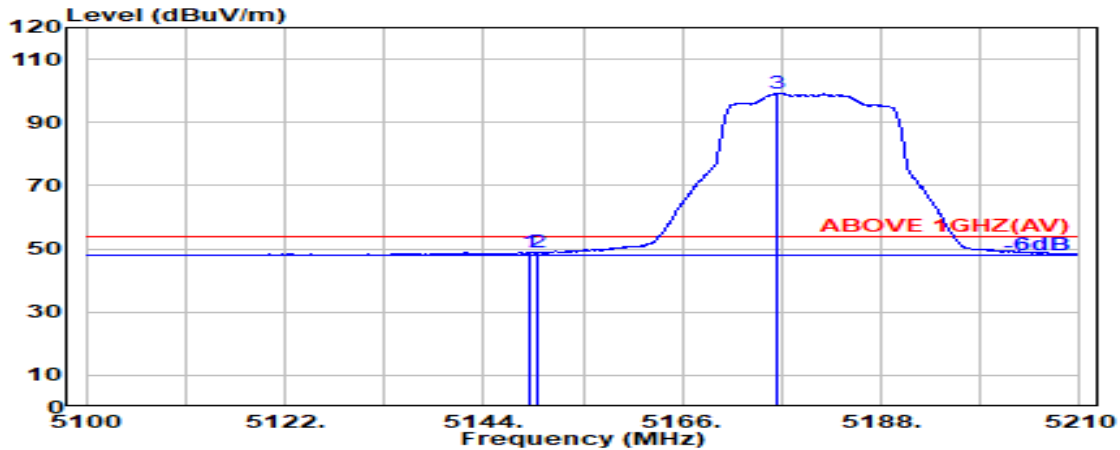


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.27	46.25	48.85	54.00	5.15	Average
5150.000	33.50	8.37	39.27	46.19	48.80	54.00	5.20	Average
@ 5176.400	33.66	8.40	39.27	96.44	99.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

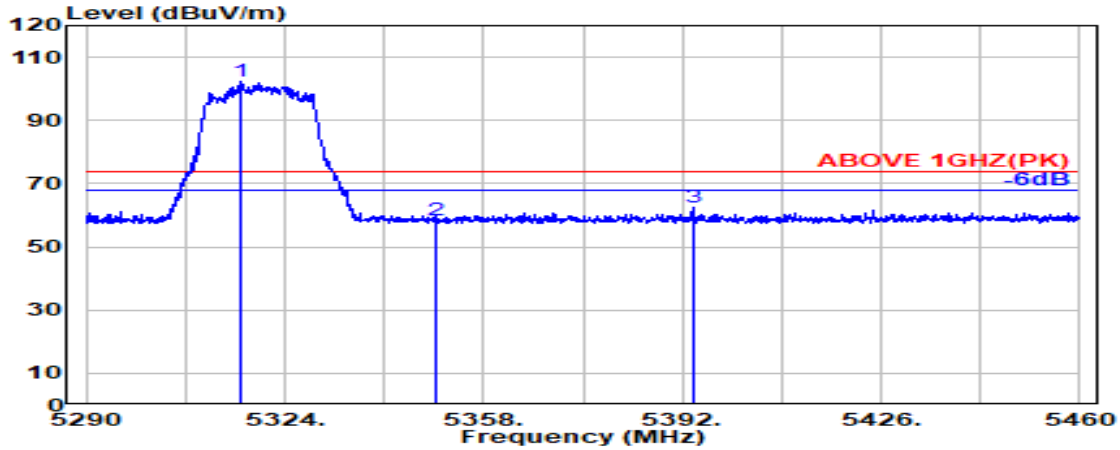

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.600	33.77	8.54	39.26	99.16	102.20	---	---	Peak
5350.000	33.70	8.57	39.26	55.57	58.58	74.00	15.42	Peak
5393.800	33.88	8.62	39.26	59.29	62.52	74.00	11.48	Peak

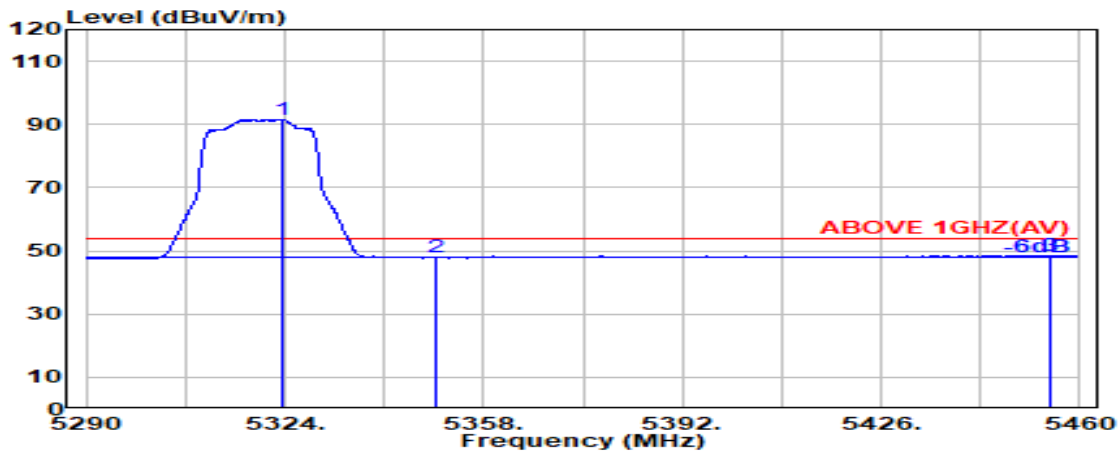


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.600	33.75	8.55	39.26	88.62	91.66	---	---	Average
5350.000	33.70	8.57	39.26	44.77	47.79	54.00	6.21	Average
5454.900	34.01	8.67	39.25	45.14	48.57	54.00	5.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

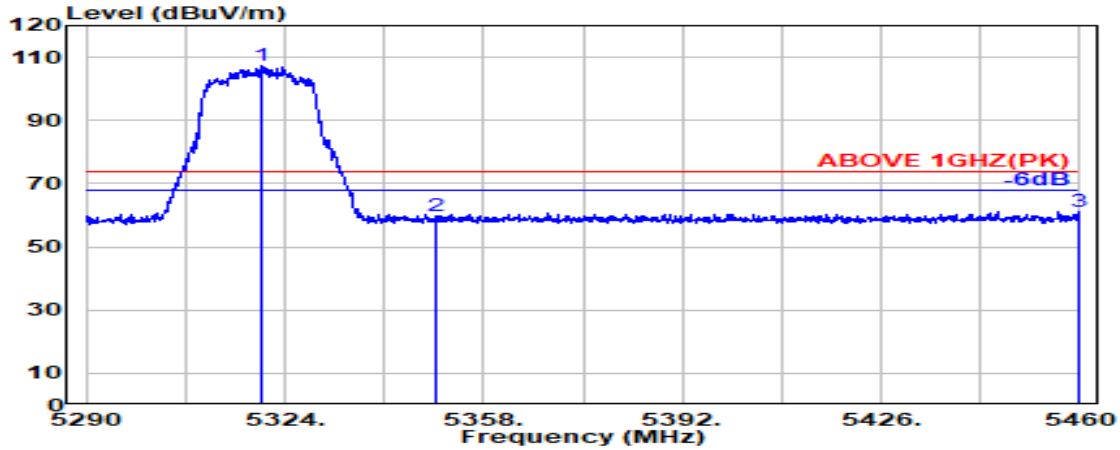

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5320.000	33.76	8.54	39.26	104.28	107.32	---	---	Peak
5350.000	33.70	8.57	39.26	56.62	59.63	74.00	14.37	Peak
5459.800	34.02	8.68	39.25	57.71	61.16	74.00	12.84	Peak

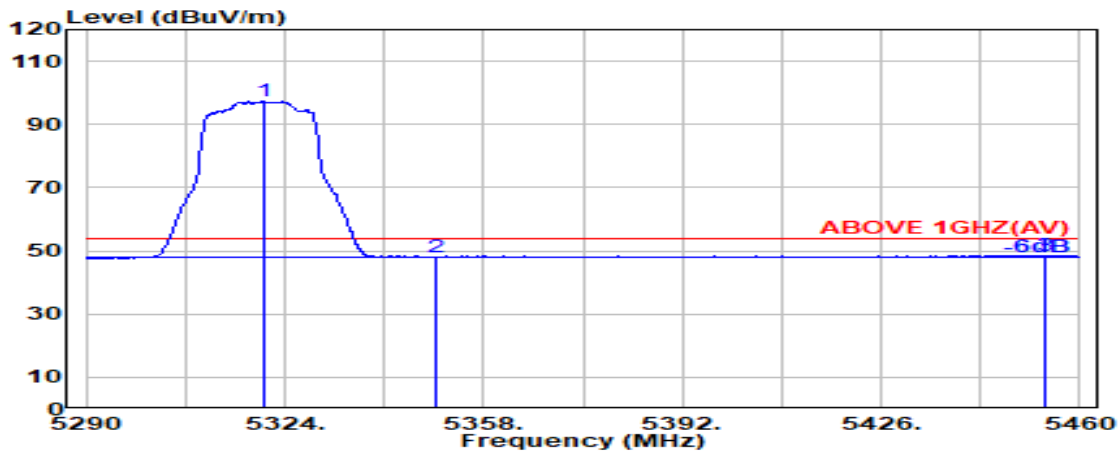


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5320.400	33.76	8.54	39.26	94.40	97.44	---	---	Average
5350.000	33.70	8.57	39.26	45.01	48.02	54.00	5.98	Average
5453.900	34.01	8.67	39.25	45.24	48.66	54.00	5.34	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

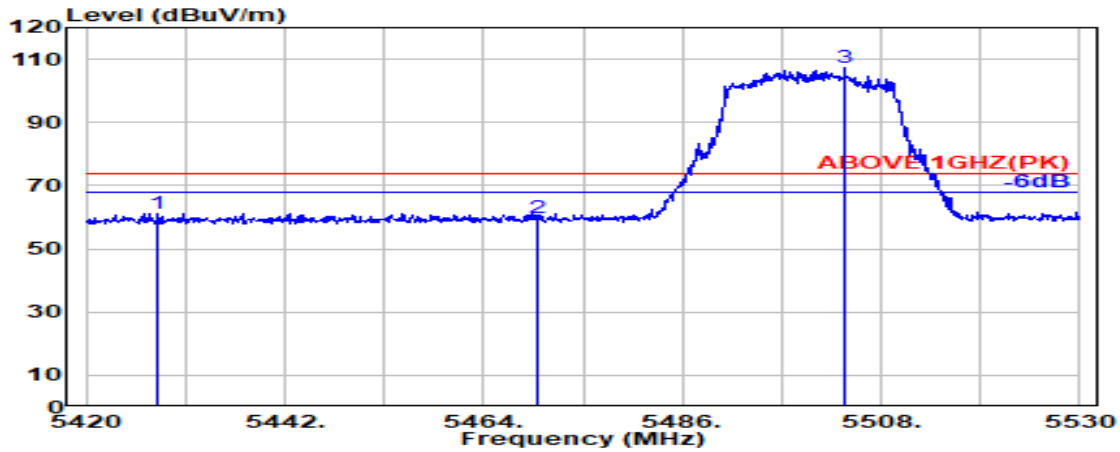

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.000	33.96	8.65	39.25	58.01	61.36	74.00	12.64	Peak
5470.000	34.04	8.69	39.25	56.22	59.70	74.00	14.30	Peak
@ 5504.000	34.09	8.72	39.25	103.57	107.13	---	---	Peak

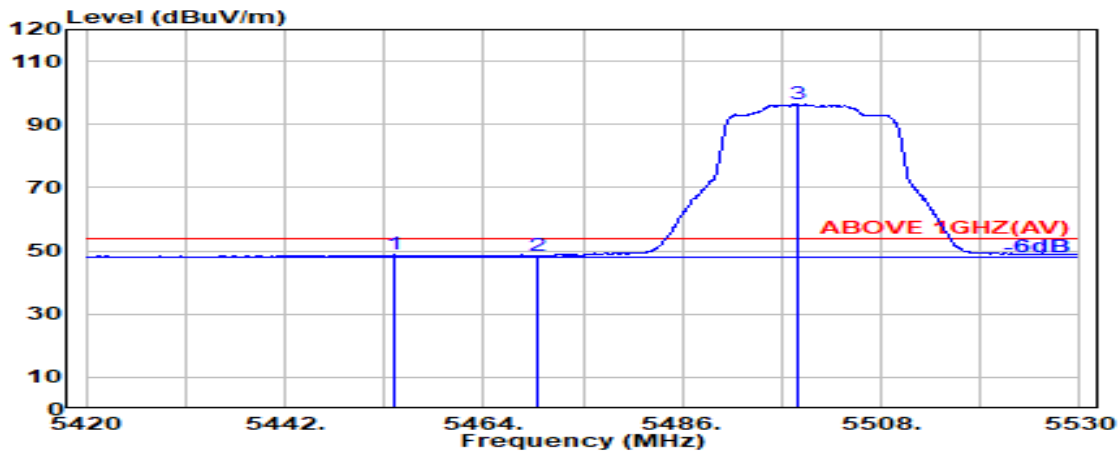


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.000	34.01	8.67	39.25	45.29	48.72	54.00	5.28	Average
5470.000	34.04	8.69	39.25	45.04	48.51	54.00	5.49	Average
@ 5498.700	34.10	8.72	39.25	92.89	96.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

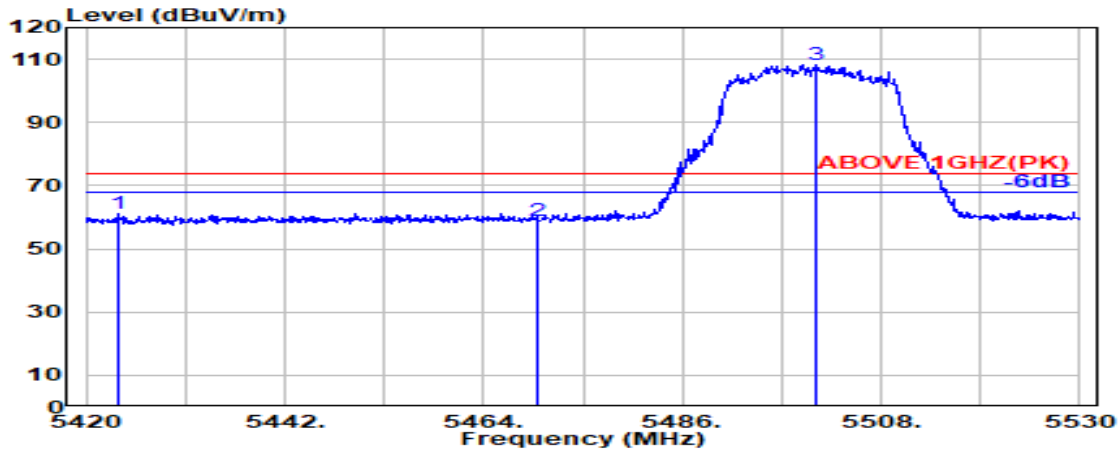

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.500	33.95	8.64	39.25	57.82	61.16	74.00	12.84	Peak
5470.000	34.04	8.69	39.25	55.36	58.84	74.00	15.16	Peak
@ 5500.900	34.10	8.72	39.25	104.70	108.27	---	---	Peak

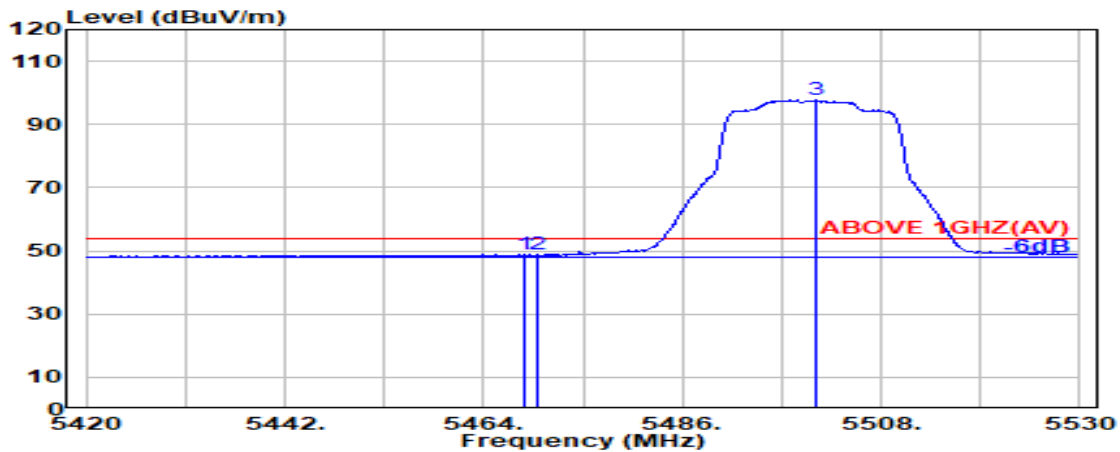


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.25	45.36	48.84	54.00	5.16	Average
5470.000	34.04	8.69	39.25	45.26	48.74	54.00	5.26	Average
@ 5500.900	34.10	8.72	39.25	94.04	97.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

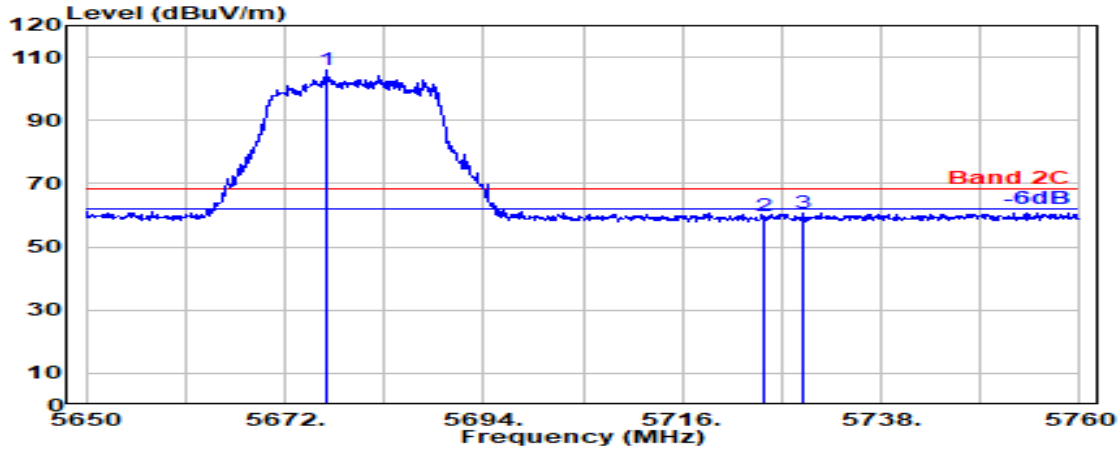

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.600	33.69	8.88	39.28	102.62	105.91	---	---	Peak
5725.000	33.60	8.93	39.29	56.35	59.58	68.20	8.62	Peak
5729.400	33.60	8.93	39.29	57.51	60.75	68.20	7.45	Peak

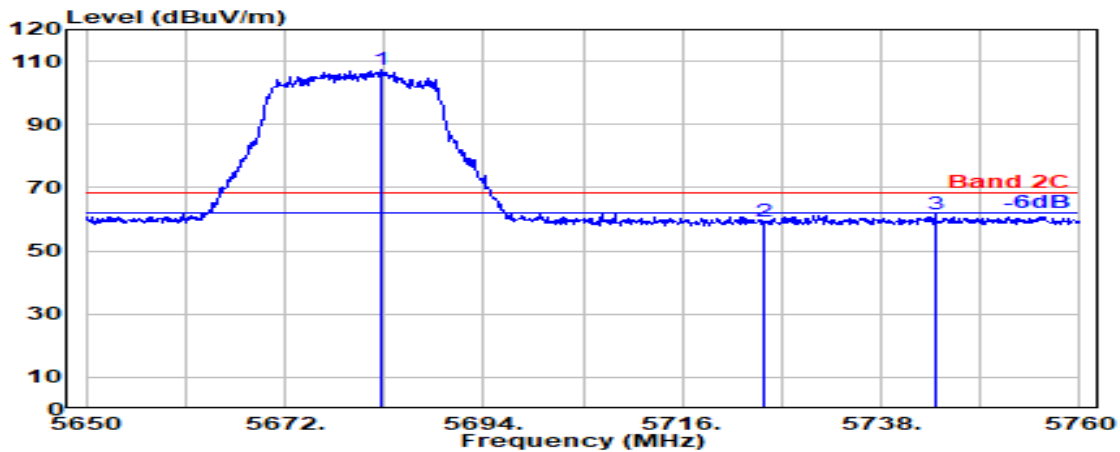


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.700	33.67	8.89	39.28	104.14	107.41	---	---	Peak
5725.000	33.60	8.93	39.29	55.89	59.13	68.20	9.07	Peak
5744.000	33.60	8.94	39.29	58.22	61.47	68.20	6.73	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

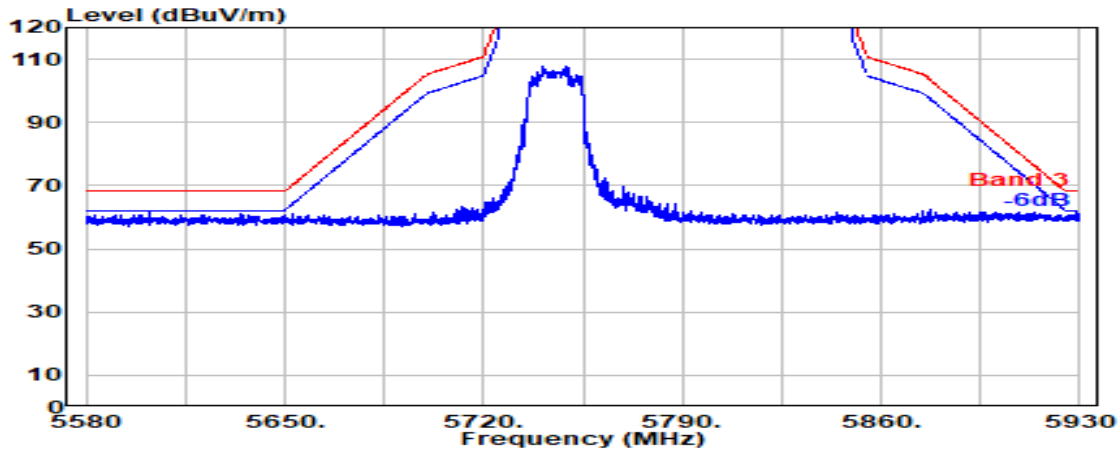


Antenna at Vertical Polarization

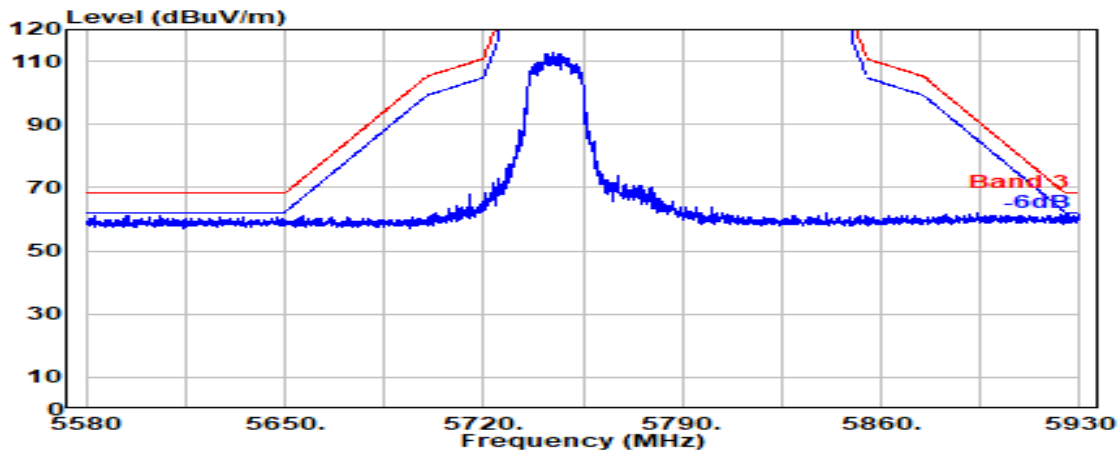


Mode	802.11be-EHT40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

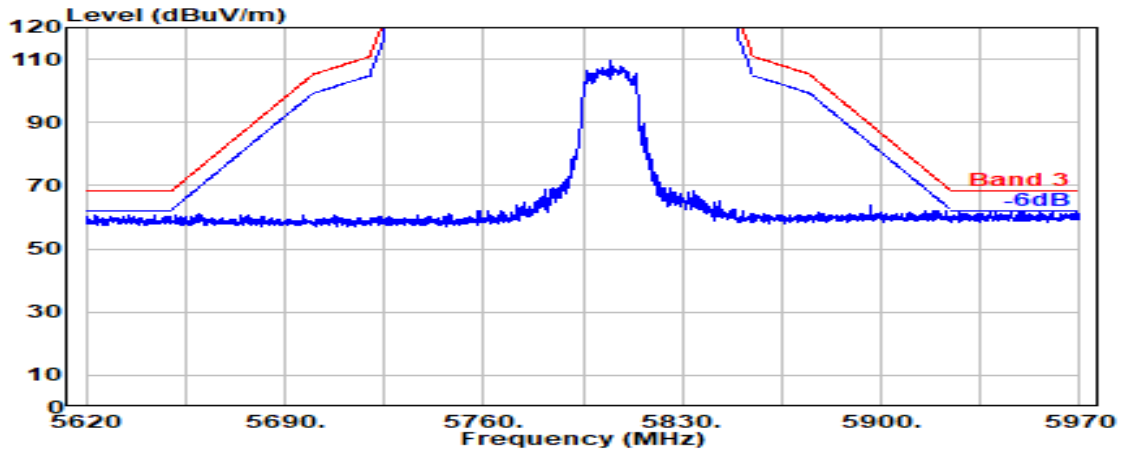

Antenna at Vertical Polarization

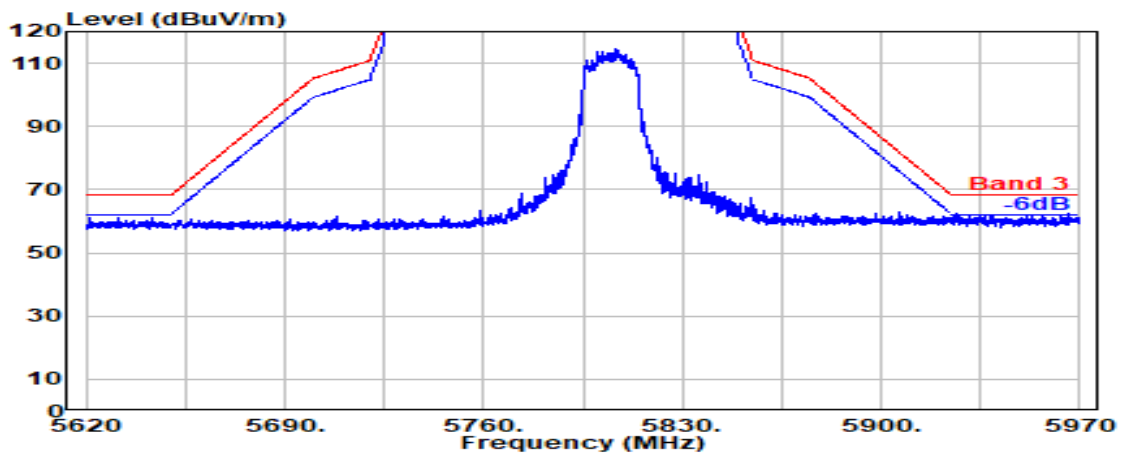


Mode	802.11be-EHT80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

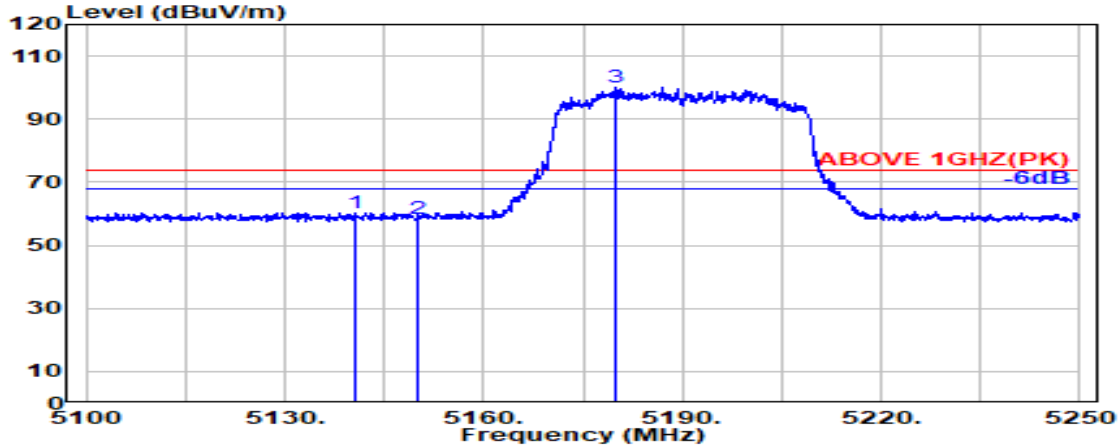

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.600	33.48	8.36	39.27	57.88	60.45	74.00	13.55	Peak
5150.000	33.50	8.37	39.27	55.82	58.42	74.00	15.58	Peak
@ 5179.800	33.68	8.40	39.27	97.12	99.93	---	---	Peak

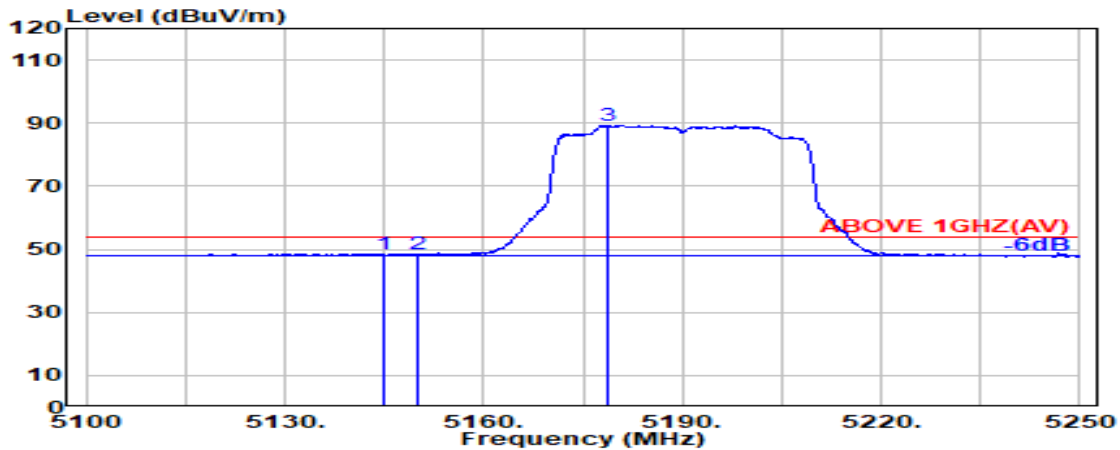


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	33.49	8.37	39.27	45.91	48.49	54.00	5.51	Average
5150.000	33.50	8.37	39.27	45.76	48.36	54.00	5.64	Average
@ 5178.600	33.67	8.40	39.27	86.62	89.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

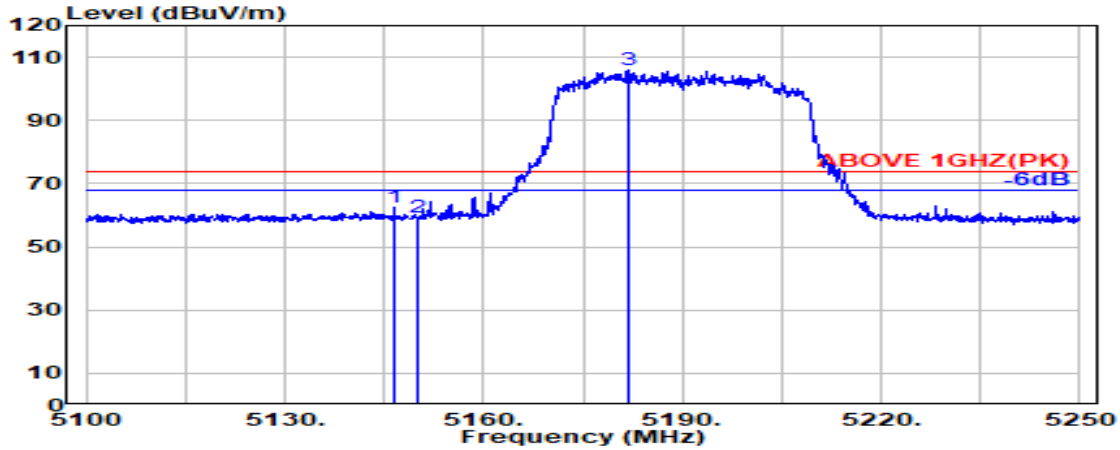

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.49	8.37	39.27	59.97	62.57	74.00	11.43	Peak
5150.000	33.50	8.37	39.27	56.79	59.39	74.00	14.61	Peak
@ 5181.700	33.69	8.41	39.27	103.31	106.14	---	---	Peak

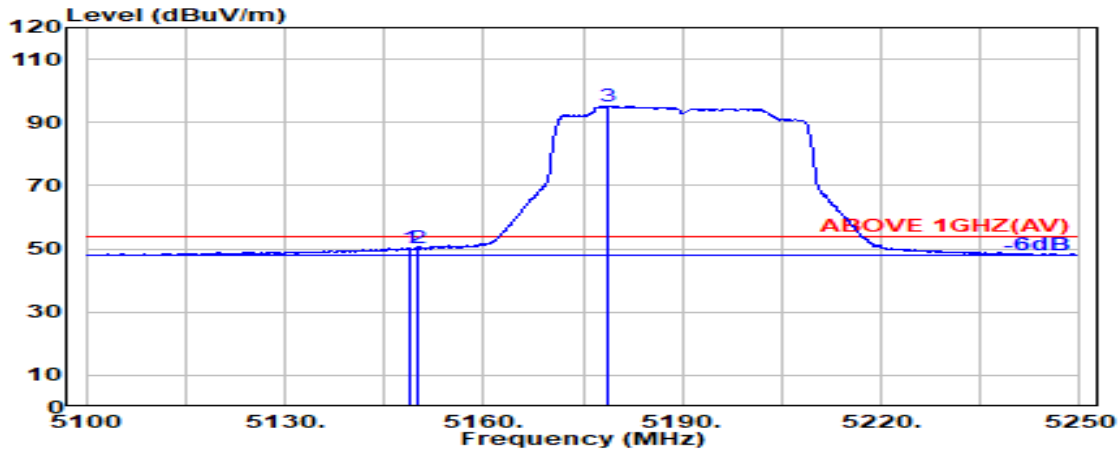


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.27	47.64	50.24	54.00	3.76	Average
5150.000	33.50	8.37	39.27	47.46	50.06	54.00	3.94	Average
@ 5178.700	33.67	8.40	39.27	92.26	95.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

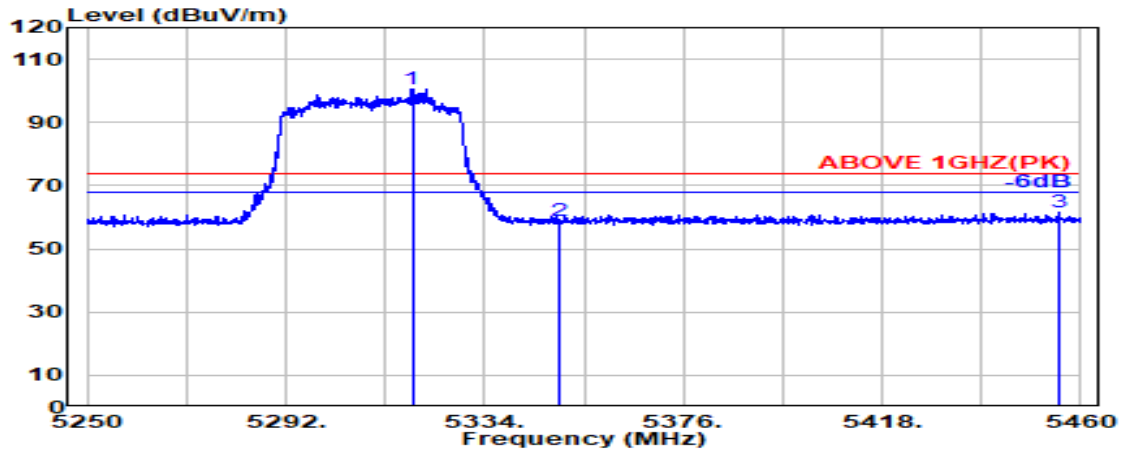

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.700	33.76	8.54	39.26	97.57	100.62	---	---	Peak
5350.000	33.70	8.57	39.26	55.67	58.69	74.00	15.31	Peak
5455.300	34.01	8.67	39.25	58.28	61.72	74.00	12.28	Peak

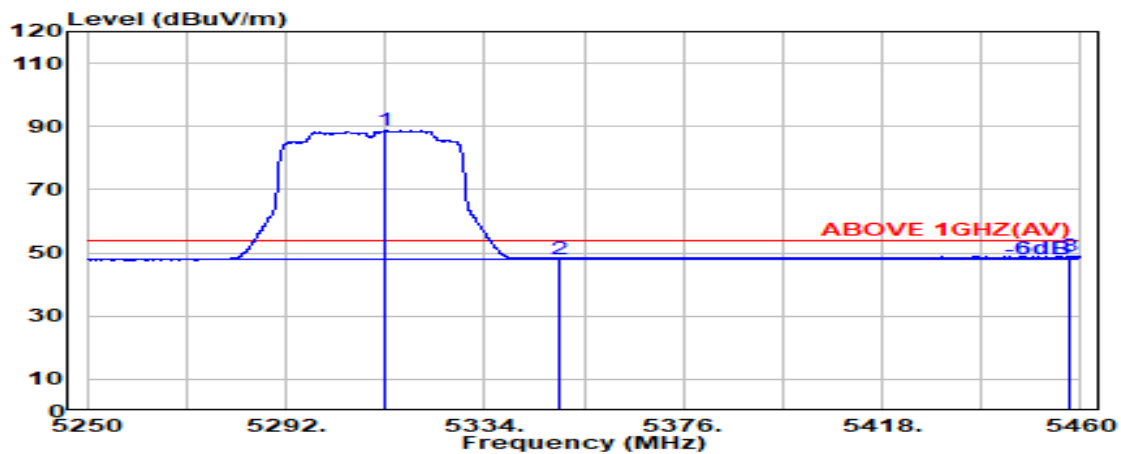


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.900	33.77	8.54	39.26	85.76	88.81	---	---	Average
5350.000	33.70	8.57	39.26	45.20	48.21	54.00	5.79	Average
5457.600	34.02	8.68	39.25	45.45	48.89	54.00	5.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

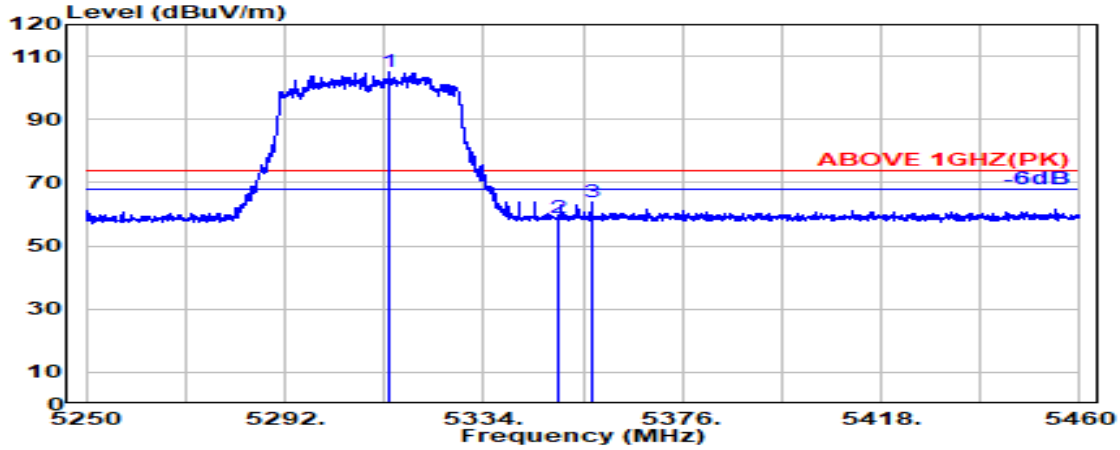

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.900	33.77	8.54	39.26	102.17	105.22	---	---	Peak
5350.000	33.70	8.57	39.26	55.74	58.75	74.00	15.25	Peak
5356.800	33.73	8.58	39.26	60.89	63.94	74.00	10.06	Peak

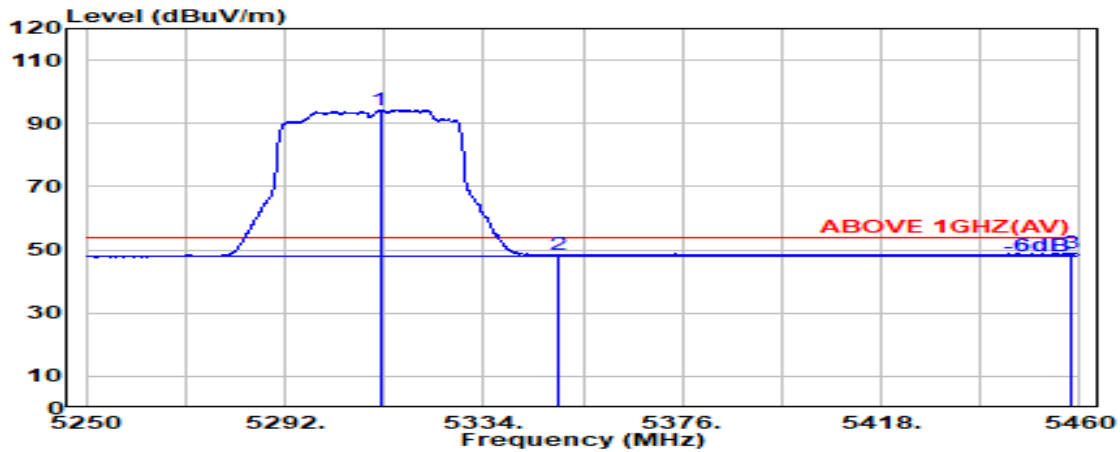


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.100	33.78	8.54	39.26	91.20	94.25	---	---	Average
5350.000	33.70	8.57	39.26	45.47	48.48	54.00	5.52	Average
5458.000	34.02	8.68	39.25	45.46	48.90	54.00	5.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

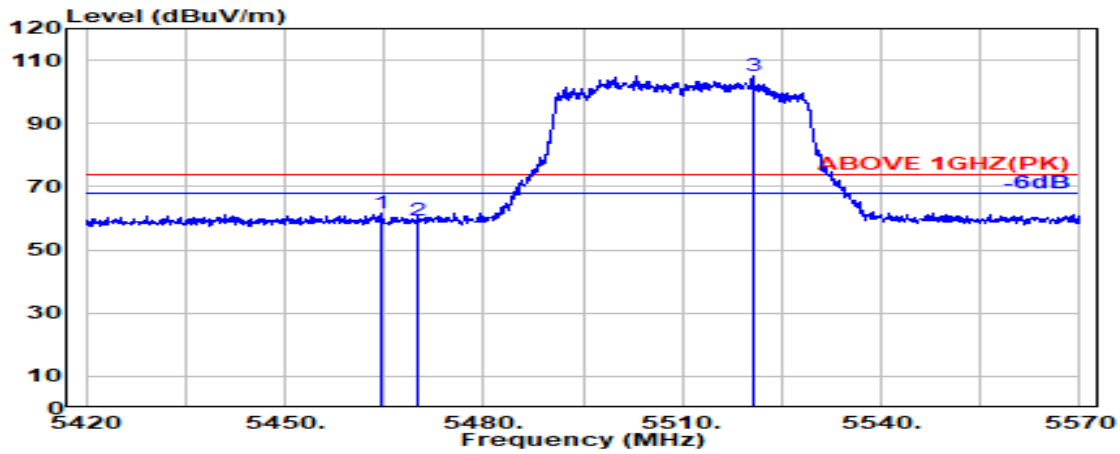

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.03	8.68	39.25	58.22	61.68	74.00	12.32	Peak
5470.000	34.04	8.69	39.25	55.67	59.15	74.00	14.85	Peak
@ 5520.600	34.06	8.74	39.25	101.59	105.14	---	---	Peak

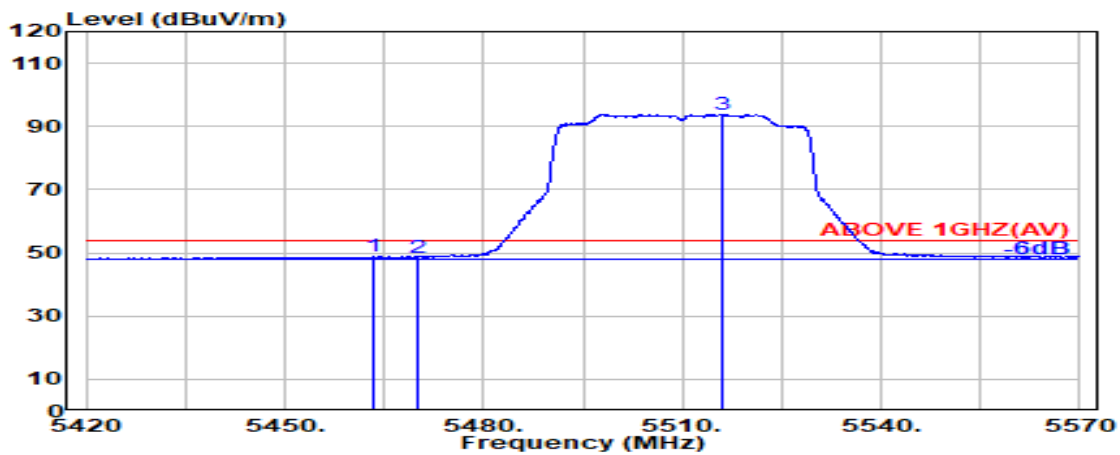


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.03	8.68	39.25	45.32	48.78	54.00	5.22	Average
5470.000	34.04	8.69	39.25	45.07	48.54	54.00	5.46	Average
@ 5516.100	34.07	8.73	39.25	90.28	93.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

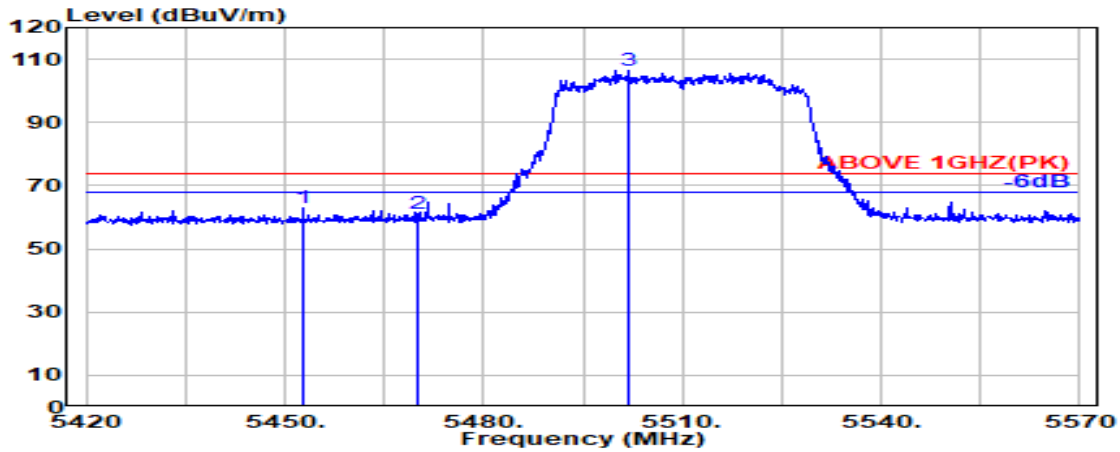

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.800	34.01	8.67	39.25	59.72	63.15	74.00	10.85	Peak
5470.000	34.04	8.69	39.25	57.45	60.93	74.00	13.07	Peak
@ 5502.000	34.10	8.72	39.25	102.80	106.36	---	---	Peak

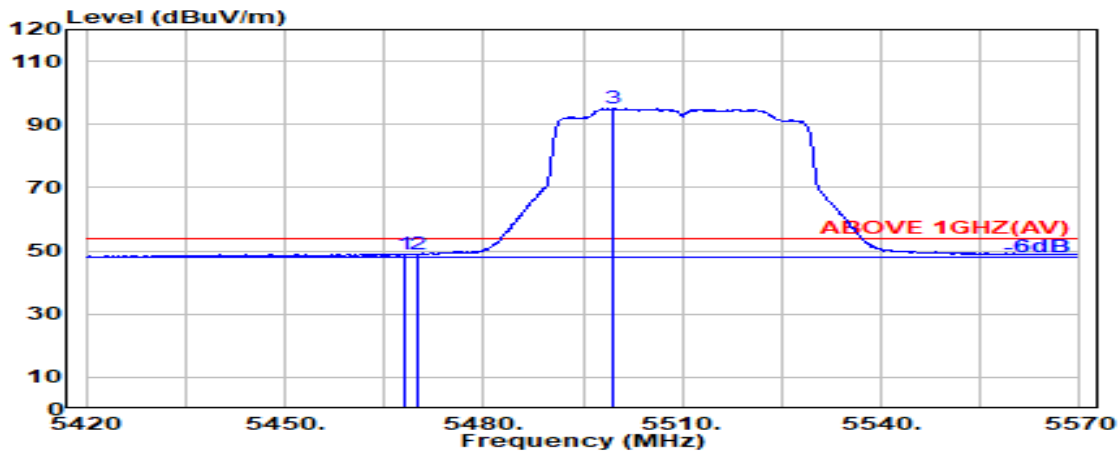


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.25	45.55	49.02	54.00	4.98	Average
5470.000	34.04	8.69	39.25	45.53	49.00	54.00	5.00	Average
@ 5499.600	34.10	8.72	39.25	91.57	95.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

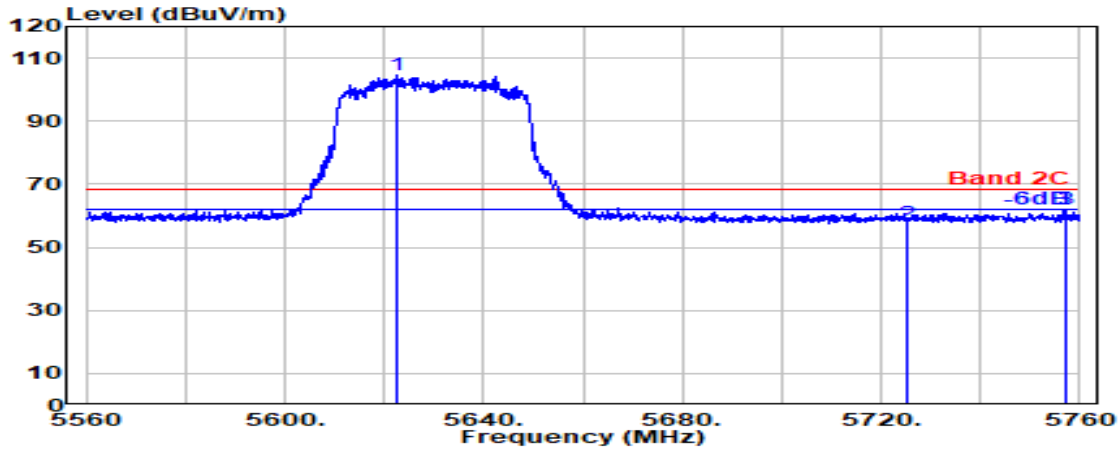

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.400	33.80	8.83	39.27	101.04	104.40	---	---	Peak
5725.000	33.60	8.93	39.29	54.35	57.58	68.20	10.62	Peak
5757.000	33.63	8.95	39.30	58.97	62.25	68.20	5.95	Peak

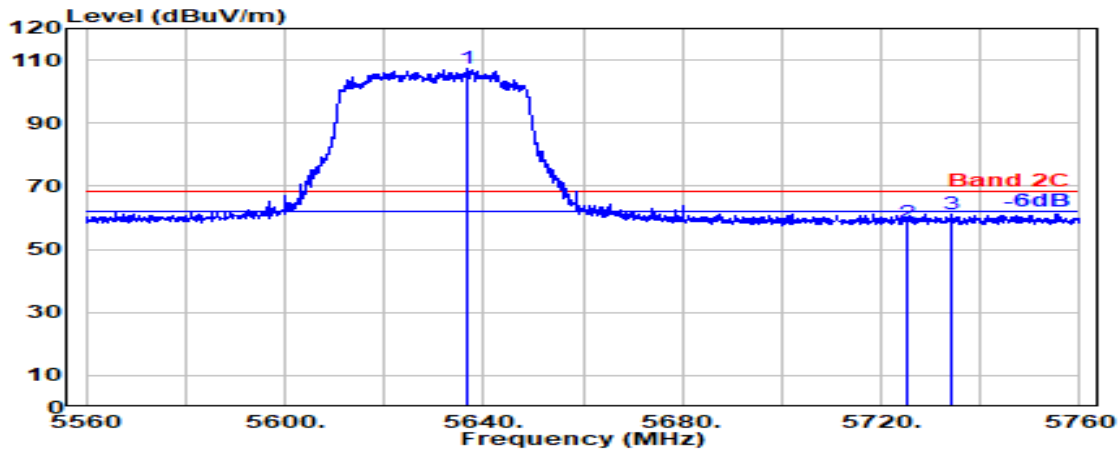


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5636.900	33.80	8.84	39.28	103.93	107.30	---	---	Peak
5725.000	33.60	8.93	39.29	55.40	58.63	68.20	9.57	Peak
5734.200	33.60	8.93	39.29	58.08	61.32	68.20	6.88	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

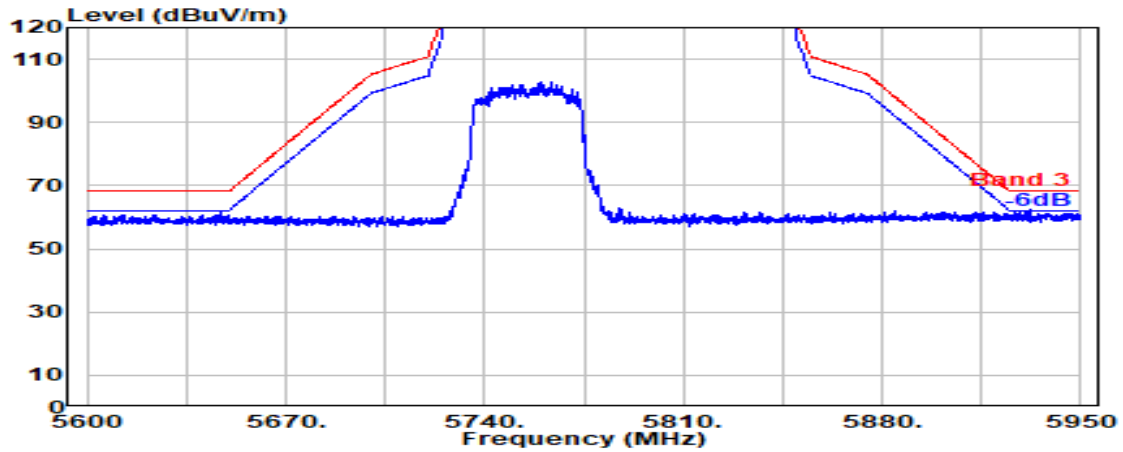


Antenna at Vertical Polarization

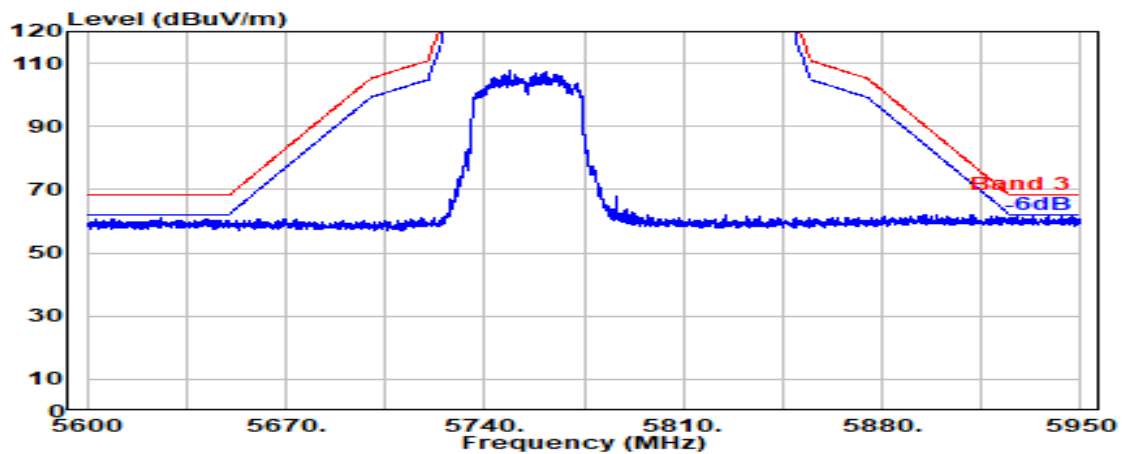


Mode	802.11be-EHT80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

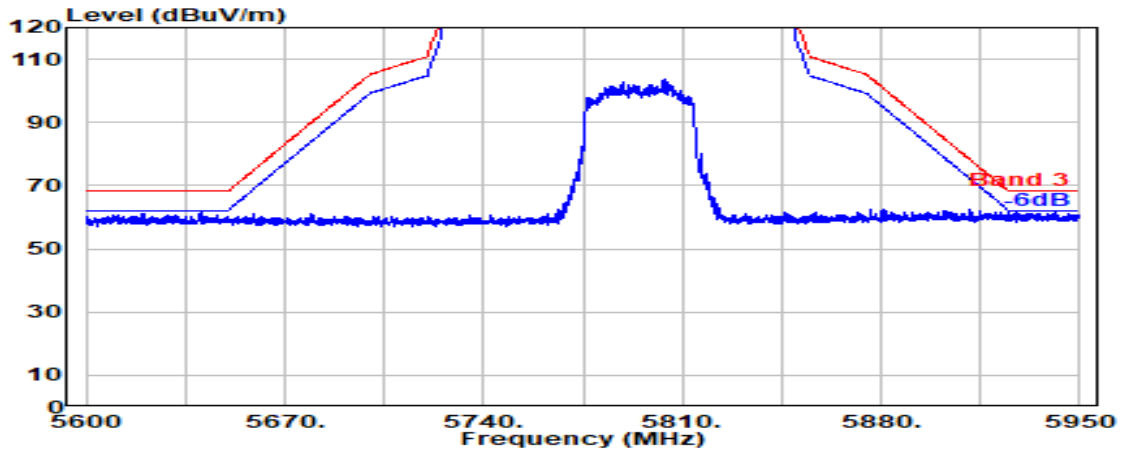

Antenna at Vertical Polarization

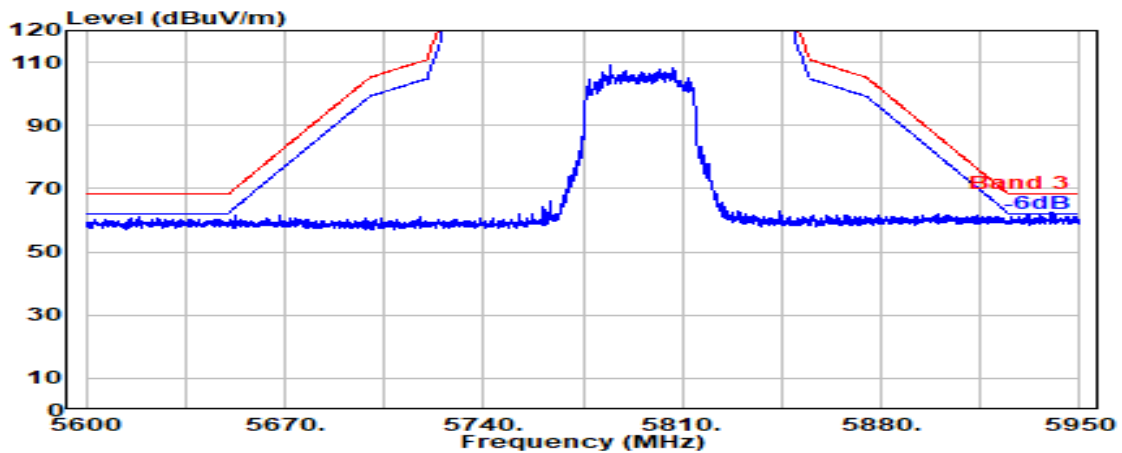


Mode	802.11be-EHT160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

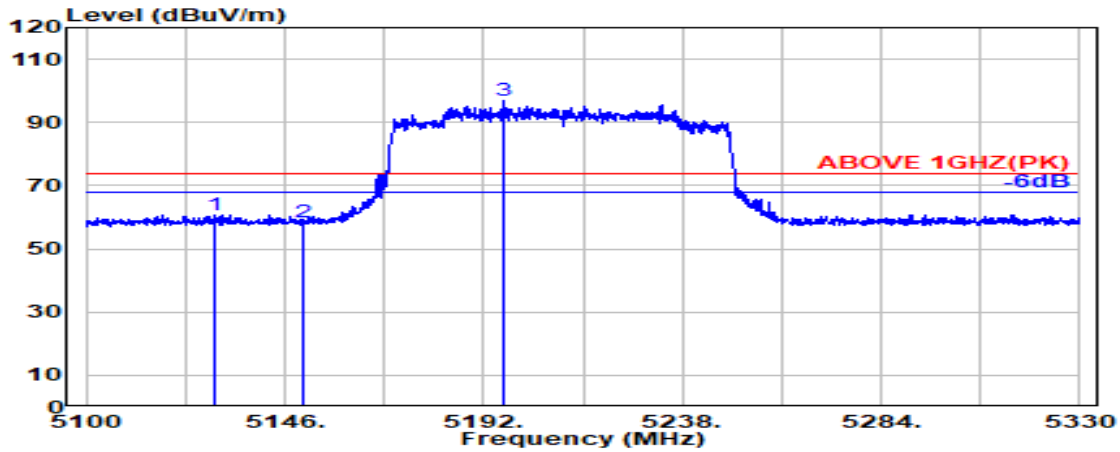

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.600	33.46	8.35	39.27	58.09	60.63	74.00	13.37	Peak
5150.000	33.50	8.37	39.27	55.80	58.41	74.00	15.59	Peak
@ 5196.900	33.78	8.42	39.27	94.04	96.98	---	---	Peak

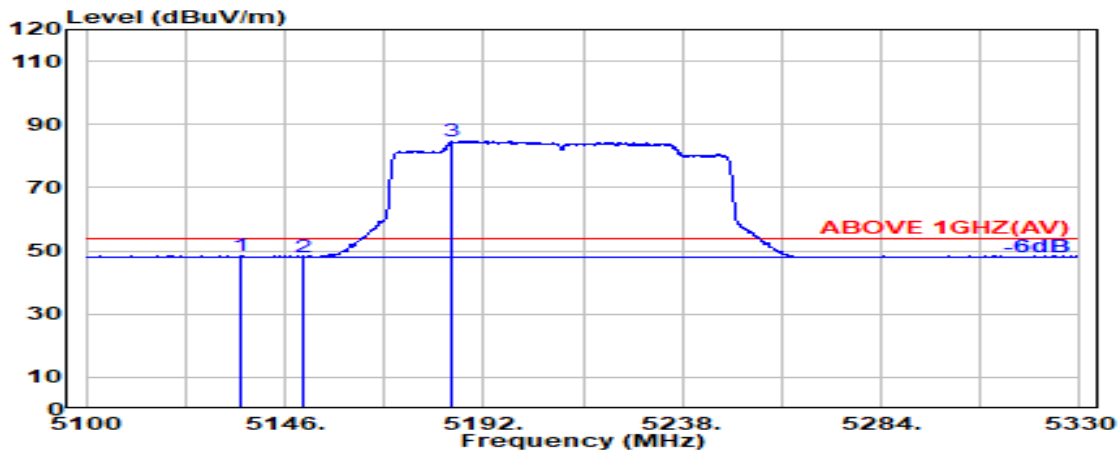


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.900	33.47	8.36	39.27	45.84	48.40	54.00	5.60	Average
5150.000	33.50	8.37	39.27	45.51	48.11	54.00	5.89	Average
@ 5184.500	33.71	8.41	39.27	81.88	84.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

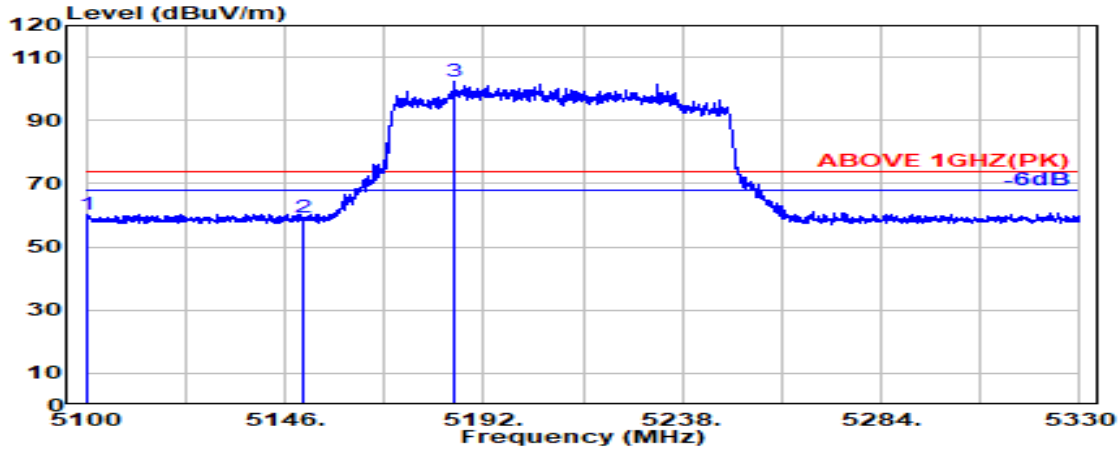

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.400	33.40	8.32	39.27	57.98	60.43	74.00	13.57	Peak
5150.000	33.50	8.37	39.27	56.57	59.17	74.00	14.83	Peak
@ 5185.300	33.71	8.41	39.27	99.33	102.18	---	---	Peak

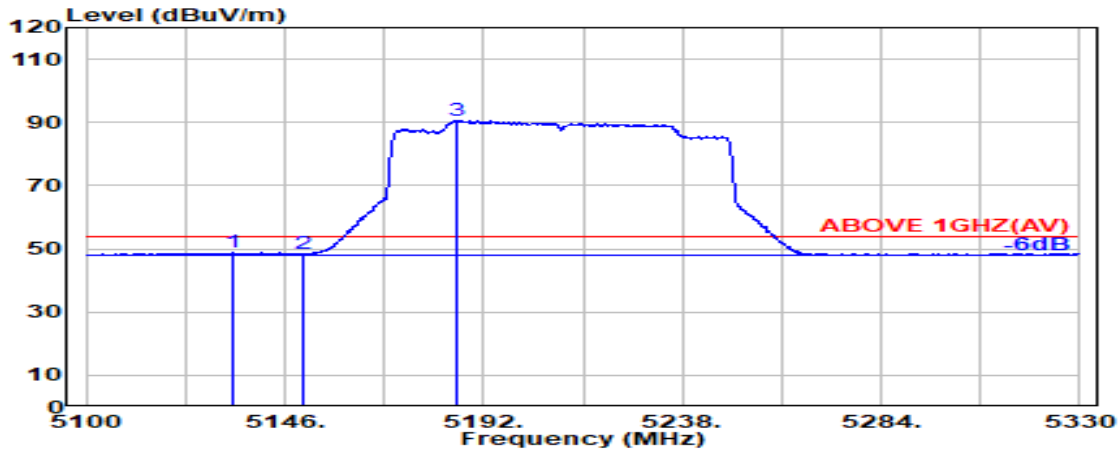


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.800	33.47	8.36	39.27	46.45	49.00	54.00	5.00	Average
5150.000	33.50	8.37	39.27	45.99	48.59	54.00	5.41	Average
@ 5185.900	33.72	8.41	39.27	87.71	90.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

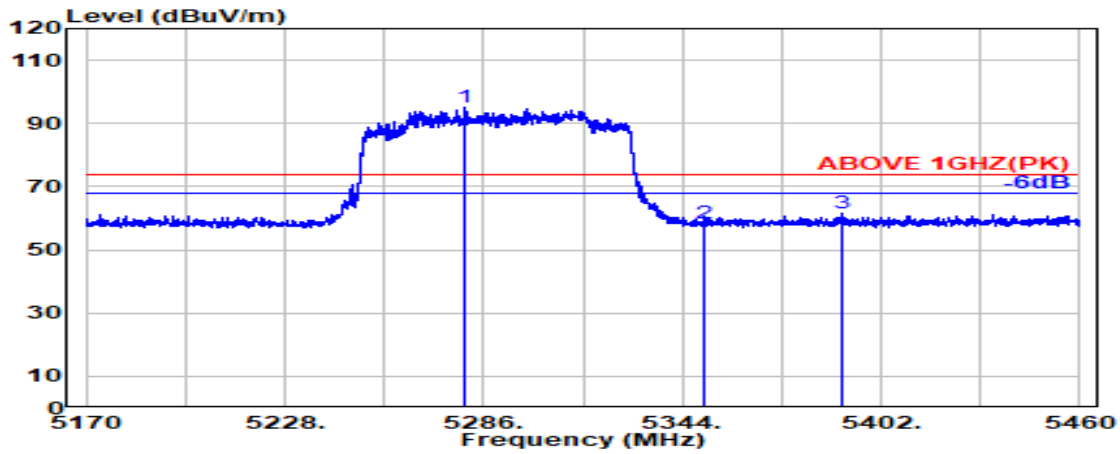

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5280.800	33.76	8.50	39.26	91.89	94.90	---	---	Peak
5350.000	33.70	8.57	39.26	55.56	58.58	74.00	15.42	Peak
5390.700	33.86	8.61	39.26	58.21	61.43	74.00	12.57	Peak

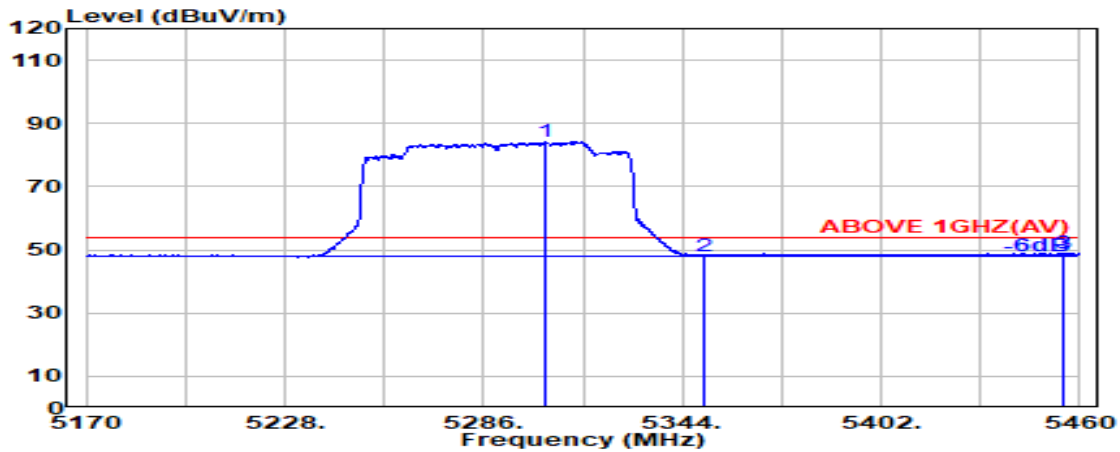


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.000	33.79	8.53	39.26	81.22	84.28	---	---	Average
5350.000	33.70	8.57	39.26	45.19	48.20	54.00	5.80	Average
5455.100	34.01	8.67	39.25	45.49	48.92	54.00	5.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

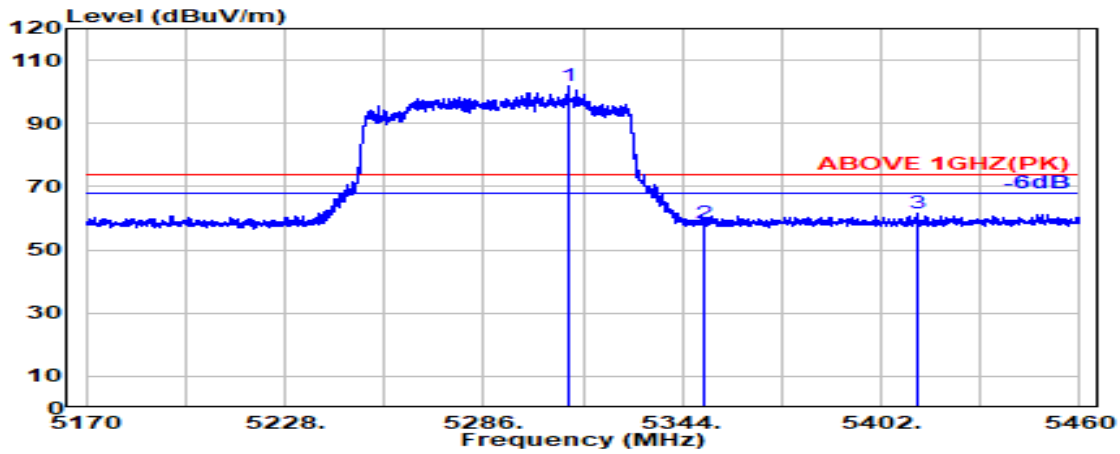

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.500	33.78	8.53	39.26	98.99	102.04	---	---	Peak
5350.000	33.70	8.57	39.26	55.30	58.32	74.00	15.68	Peak
5412.800	33.93	8.63	39.26	58.18	61.48	74.00	12.52	Peak

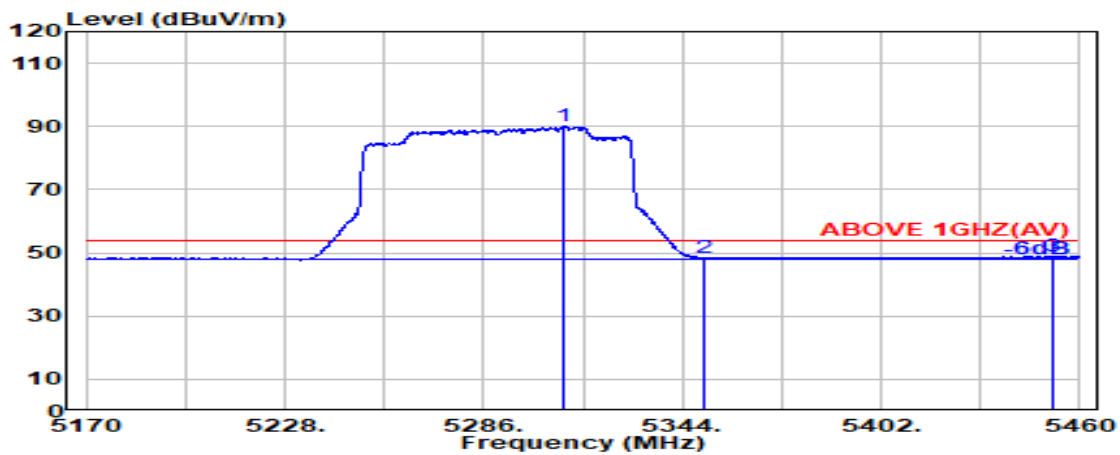


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.600	33.78	8.53	39.26	86.85	89.90	---	---	Average
5350.000	33.70	8.57	39.26	45.33	48.34	54.00	5.66	Average
5452.400	34.00	8.67	39.25	45.48	48.90	54.00	5.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

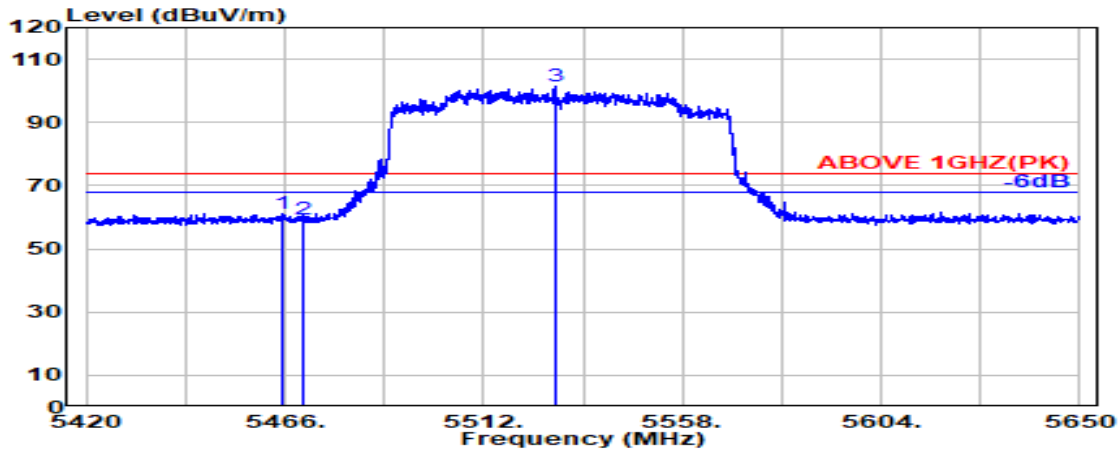

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.03	8.68	39.25	57.57	61.03	74.00	12.97	Peak
5470.000	34.04	8.69	39.25	55.85	59.33	74.00	14.67	Peak
@ 5528.800	34.04	8.74	39.26	97.83	101.36	---	---	Peak

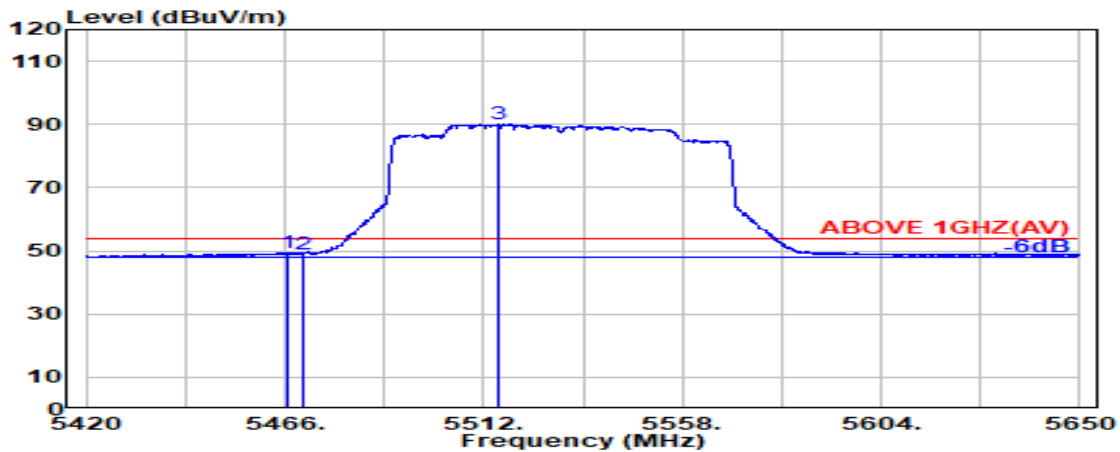


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.03	8.69	39.25	46.04	49.51	54.00	4.49	Average
5470.000	34.04	8.69	39.25	45.58	49.06	54.00	4.94	Average
@ 5515.300	34.07	8.73	39.25	86.49	90.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

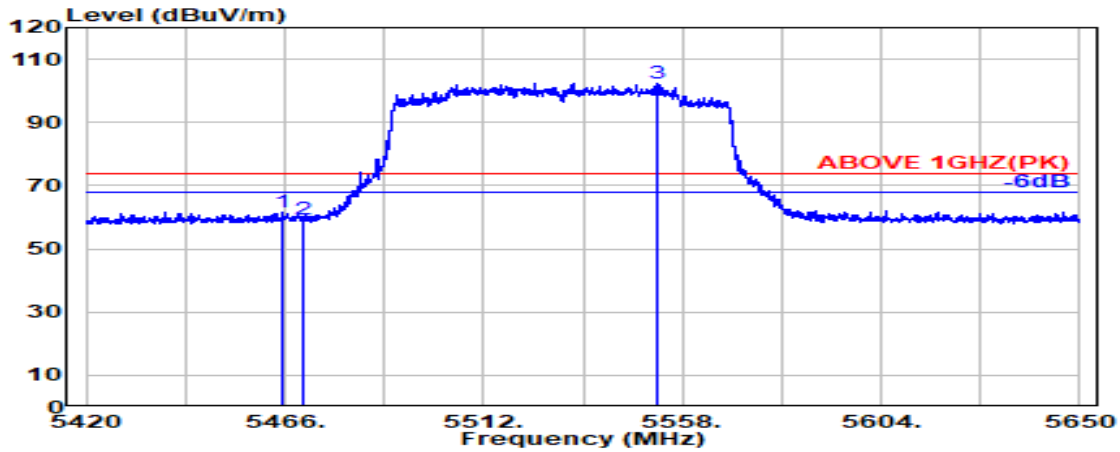

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.03	8.68	39.25	58.32	61.78	74.00	12.22	Peak
5470.000	34.04	8.69	39.25	56.04	59.52	74.00	14.48	Peak
@ 5551.900	33.99	8.77	39.26	99.02	102.52	---	---	Peak

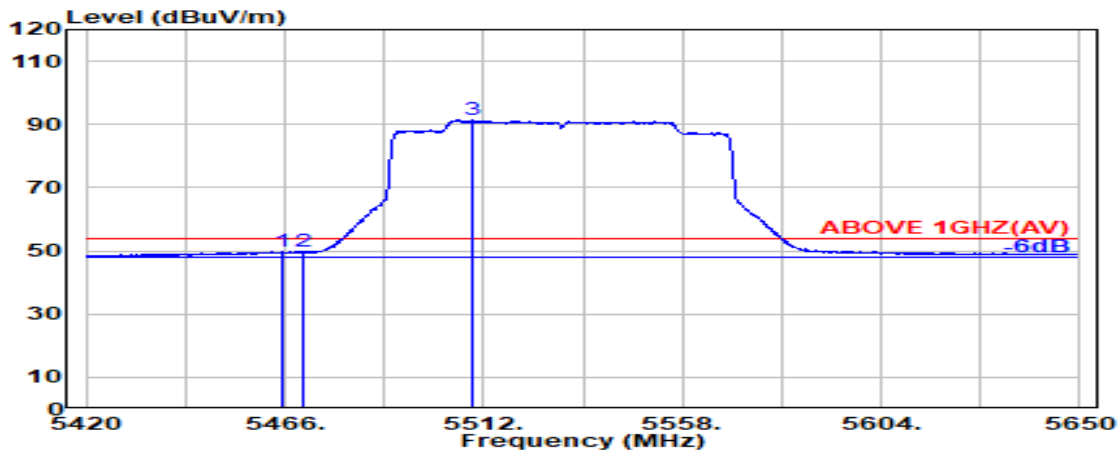


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.25	46.29	49.75	54.00	4.25	Average
5470.000	34.04	8.69	39.25	46.12	49.60	54.00	4.40	Average
@ 5509.300	34.08	8.73	39.25	87.77	91.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

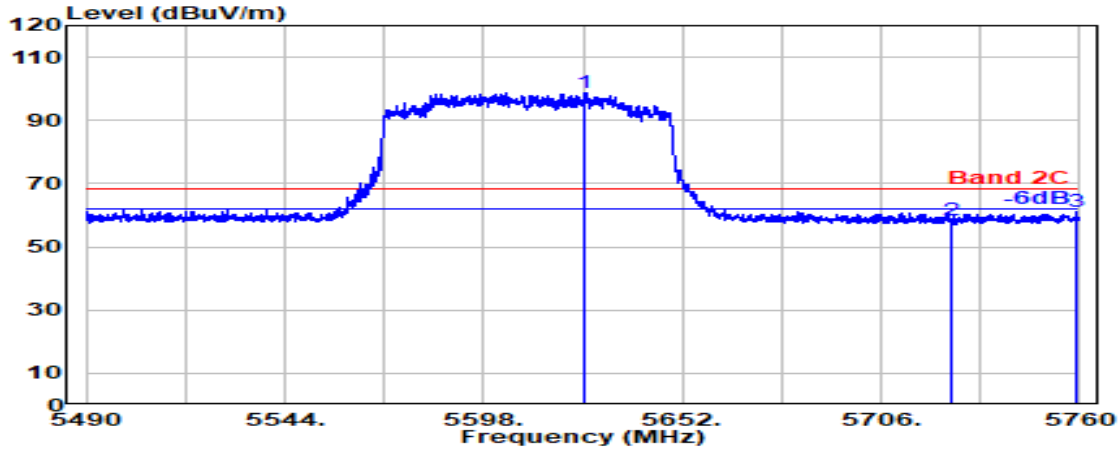

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5625.500	33.80	8.83	39.27	95.53	98.89	---	---	Peak
5725.000	33.60	8.93	39.29	55.04	58.27	68.20	9.93	Peak
5759.100	33.64	8.96	39.30	57.93	61.23	68.20	6.97	Peak

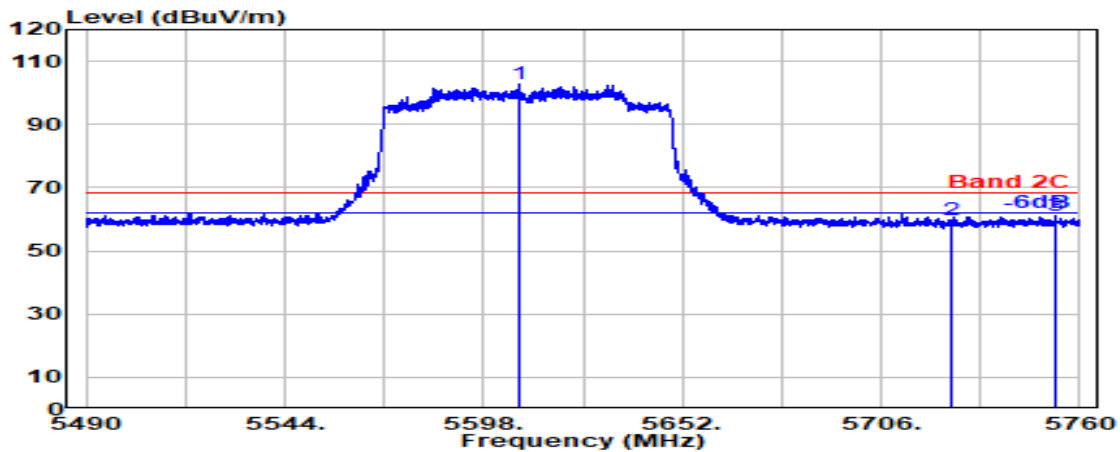

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.500	33.80	8.82	39.27	99.30	102.64	---	---	Peak
5725.000	33.60	8.93	39.29	56.35	59.58	68.20	8.62	Peak
5753.300	33.61	8.95	39.30	57.78	61.04	68.20	7.16	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.32	33.58	44.42	54.00	9.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.32	34.69	45.53	54.00	8.47	Peak

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.20	12.20	39.23	32.57	43.75	54.00	10.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.20	12.20	39.23	33.49	44.67	54.00	9.33	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.40	12.70	39.06	34.50	46.54	54.00	7.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.40	12.70	39.06	34.59	46.63	54.00	7.37	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	39.10	35.30	48.00	54.00	6.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	39.10	36.87	49.57	54.00	4.43	Peak

Mode	802.11a	U-NII Band	U-NII Band 3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.91	13.28	39.15	35.73	48.77	54.00	5.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.91	13.28	39.15	34.87	47.91	54.00	6.09	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.32	32.92	43.76	54.00	10.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.32	33.67	44.51	54.00	9.49	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.20	12.17	39.25	35.15	46.28	54.00	7.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.20	12.17	39.25	36.05	47.18	54.00	6.82	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	39.10	35.22	47.87	54.00	6.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	39.10	35.73	48.37	54.00	5.63	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	39.10	36.07	48.76	54.00	5.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	39.10	35.64	48.33	54.00	5.67	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.91	13.28	39.15	35.55	48.59	54.00	5.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.91	13.28	39.15	35.51	48.55	54.00	5.45	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.35	35.90	46.68	54.00	7.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.35	36.56	47.34	54.00	6.66	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.20	12.19	39.24	36.44	47.59	54.00	6.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.20	12.19	39.24	35.66	46.81	54.00	7.19	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	39.09	35.27	47.66	54.00	6.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	39.09	35.73	48.12	54.00	5.88	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	39.10	35.49	48.16	54.00	5.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	39.10	36.25	48.92	54.00	5.08	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.12	35.96	48.77	54.00	5.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.12	35.31	48.12	54.00	5.88	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.40	35.65	46.30	54.00	7.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.40	36.82	47.48	54.00	6.52	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.26	37.06	48.15	54.00	5.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.26	35.58	46.67	54.00	7.33	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	39.05	34.42	46.33	54.00	7.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	39.05	34.48	46.38	54.00	7.62	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	39.09	35.73	48.29	54.00	5.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	39.09	35.09	47.65	54.00	6.35	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.14	34.51	47.47	54.00	6.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.14	34.94	47.91	54.00	6.09	Peak

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.30	35.44	46.34	54.00	7.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.30	35.10	46.00	54.00	8.00	Peak

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	39.06	36.92	48.93	54.00	5.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	39.06	34.44	46.45	54.00	7.55	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.32	36.00	46.84	54.00	7.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.08	12.08	39.32	35.69	46.53	54.00	7.47	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.20	12.20	39.23	36.43	47.61	54.00	6.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.20	12.20	39.23	37.87	49.05	54.00	4.95	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	39.10	34.80	47.45	54.00	6.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	39.10	36.56	49.20	54.00	4.80	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	39.10	36.07	48.76	54.00	5.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	39.10	37.01	49.70	54.00	4.30	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.91	13.28	39.15	34.77	47.81	54.00	6.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.91	13.28	39.15	35.65	48.69	54.00	5.31	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.35	35.15	45.93	54.00	8.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	38.06	12.07	39.35	35.59	46.37	54.00	7.63	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.20	12.19	39.24	38.03	49.19	54.00	4.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.20	12.19	39.24	35.85	47.00	54.00	7.00	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	39.09	35.04	47.43	54.00	6.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	39.09	35.95	48.33	54.00	5.67	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	39.10	36.55	49.22	54.00	4.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	39.10	36.21	48.88	54.00	5.12	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.12	35.74	48.54	54.00	5.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.12	36.16	48.97	54.00	5.03	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.40	35.22	45.88	54.00	8.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.40	35.33	45.99	54.00	8.01	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.26	35.74	46.82	54.00	7.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.26	36.19	47.28	54.00	6.72	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	39.05	34.98	46.89	54.00	7.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	39.05	35.01	46.92	54.00	7.08	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	39.09	36.24	48.80	54.00	5.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	39.09	35.56	48.12	54.00	5.88	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.14	36.31	49.27	54.00	4.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.14	35.91	48.87	54.00	5.13	Peak

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.30	35.54	46.44	54.00	7.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.30	35.29	46.19	54.00	7.81	Peak

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	39.06	35.16	47.17	54.00	6.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	39.06	35.27	47.28	54.00	6.72	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.00	12.02	39.42	36.81	47.41	54.00	6.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	38.00	12.02	39.42	36.59	47.19	54.00	6.81	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.20	12.20	39.23	35.59	46.77	54.00	7.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.20	12.20	39.23	36.03	47.21	54.00	6.79	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	39.10	35.59	48.23	54.00	5.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	39.10	35.97	48.61	54.00	5.39	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	39.10	35.23	47.93	54.00	6.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	39.10	35.11	47.80	54.00	6.20	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	39.11	35.65	48.41	54.00	5.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	38.70	13.17	39.11	35.81	48.57	54.00	5.43	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.02	12.01	39.45	36.19	46.77	54.00	7.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.02	12.01	39.45	36.36	46.94	54.00	7.06	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.20	12.19	39.24	36.13	47.29	54.00	6.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10620.000	38.20	12.19	39.24	36.11	47.27	54.00	6.73	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	39.09	36.84	49.23	54.00	4.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	39.09	35.40	47.79	54.00	6.21	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	39.10	35.56	48.23	54.00	5.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	39.10	36.08	48.75	54.00	5.25	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.12	35.81	48.62	54.00	5.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.73	13.19	39.12	36.18	48.99	54.00	5.01	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.40	36.28	46.94	54.00	7.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.02	12.04	39.40	36.07	46.73	54.00	7.27	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.26	35.55	46.64	54.00	7.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.26	36.69	47.77	54.00	6.23	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	39.05	36.18	48.08	54.00	5.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	39.05	37.08	48.99	54.00	5.01	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	39.09	36.46	49.02	54.00	4.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	39.09	36.03	48.59	54.00	5.41	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.14	35.54	48.50	54.00	5.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.85	13.25	39.14	35.39	48.35	54.00	5.65	Peak

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.30	34.89	45.79	54.00	8.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.30	35.05	45.95	54.00	8.05	Peak

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	39.06	34.43	46.44	54.00	7.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	39.06	34.74	46.75	54.00	7.25	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED

BANDWIDTH

Test Date	2024/06/27 ~ 08/22	Temp./Hum.	24°C/55 ~ 59%
Cable Loss	10dB	Tested By	Harry Huang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Average Output Power and Emission/Occupied Bandwidth

Mode 802.11a	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Max Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5180	22.90	23.48	16.556	16.692	15.80	15.81	0.101	24	N/A	
	5200	23.25	23.33	16.735	16.762	15.91	15.88				
	5240	23.40	22.69	16.772	16.722	16.03	15.88				
U-NII Band 2A	5260	23.70	23.64	16.785	16.659	16.02	15.90	0.101	24	24.74	
	5300	23.03	23.55	16.614	16.614	16.10	15.91			24.62	
	5320	22.54	22.29	16.608	16.651	16.15	16.03			24.48	
U-NII Band 2C	5500	23.31	23.70	16.657	16.689	16.12	15.68	0.101	24	24.68	
	5580	23.63	22.35	16.777	16.639	16.29	15.92			24.49	
	5700	22.76	22.57	16.646	16.577	16.25	15.98			24.54	
	5720	23.37	22.88	16.649	16.657	16.24	16.12			24.59	
U-NII Band 3	5745	15.14	16.35	16.516	16.581	16.25	16.03	0.101	30	N/A	
	5785	14.48	15.66	16.561	16.598	16.52	16.08				
	5825	14.45	13.10	16.563	16.584	16.25	15.92				

Note: 1. The results have been included cable loss.

2. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}						
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main										
		Aux	Main	Aux	Main												
U-NII Band 1	5180	23.03	23.21	17.721	17.737	15.80	15.75	N/A	24	N/A							
	5200	23.74	23.45	17.795	17.742	15.82	15.77										
	5240	23.52	22.63	17.770	17.765	15.96	15.78										
U-NII Band 2A	5260	22.69	23.96	17.785	17.856	15.89	15.81			N/A	24	24.56					
	5300	22.83	22.69	17.820	17.844	15.98	15.82					24.56					
	5320	23.42	23.48	17.814	17.772	15.94	15.66					24.70					
U-NII Band 2C	5500	22.76	23.39	17.698	17.782	16.03	15.59					N/A	24	24.57			
	5580	23.34	23.08	17.751	17.799	16.19	15.80							24.63			
	5700	23.94	22.64	17.848	17.731	16.16	15.88							24.55			
	5720	23.30	23.03	17.804	17.847	16.27	16.00							24.62			
Mode 802.11n-HT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)								Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main										
		Aux	Main	Aux	Main												
U-NII Band 3	5745	16.92	17.62	17.732	17.734	16.19	15.88	N/A	30					N/A			
	5785	17.30	16.70	17.680	17.744	16.41	15.97										
	5825	14.42	15.04	17.707	17.764	16.13	15.78										

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+1 0 log B) ^{Note 3}			
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 1	5190	42.74	41.58	36.098	36.031	15.66	15.63	N/A	24	N/A				
	5230	42.65	42.11	36.027	35.984	15.66	15.74							
U-NII Band 2A	5270	41.83	42.83	36.081	36.030	15.58	15.88							
	5310	41.97	41.87	36.045	36.023	15.67	15.88							
U-NII Band 2C	5510	42.43	42.86	36.075	36.020	15.72	15.47							
	5550	42.82	41.68	36.014	36.094	15.95	15.64							
	5670	42.47	41.79	36.102	36.026	15.95	16.13							
	5710	41.74	42.99	36.071	35.991	15.90	16.16							
Mode 802.11n-HT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)					Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+1 0 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main									
U-NII Band 3	5755	36.14	36.39	37.455	36.072	15.82	16.23	N/A	30	N/A				
	5795	35.10	37.29	37.398	36.089	15.81	16.16							

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5210	82.62	84.40	75.225	75.039	13.71	13.79	N/A	24	N/A	
U-NII Band 2A	5290	83.56	85.03	75.278	74.976	13.86	14.31			30.22	
U-NII Band 2C	5530	82.68	83.37	75.062	75.197	13.70	13.91			30.17	
	5610	84.22	84.26	75.193	75.049	13.73	13.53			30.25	
	5690	84.49	83.69	75.210	75.171	13.91	14.18			30.23	
Mode 802.11ac- VHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main						
Aux	Main	Aux	Main								
U-NII Band 3	5775	72.56	72.46	75.059	75.124	14.02	14.45	N/A	17.25	30	N/A

Mode 802.11ac- VHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1/2A	5250	162.10	162.30	153.63	153.52	12.94	13.37	N/A	24	33.10	
U-NII Band 2C	5570	163.00	164.10	153.58	154.00	14.12	14.21			33.12	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5180	23.60	23.48	18.943	18.979	15.63	15.48	N/A	24	N/A	
	5200	22.65	23.74	18.909	18.967	15.74	15.56				
	5240	23.67	23.43	18.927	18.920	15.55	15.81				
U-NII Band 2A	5260	23.19	23.02	18.926	18.894	15.53	15.81				
	5300	23.55	23.03	18.920	18.964	15.63	15.85				
	5320	22.58	22.71	18.893	18.912	15.62	15.92				
U-NII Band 2C	5500	22.38	23.69	18.923	18.940	15.64	15.39				
	5580	22.06	23.71	18.928	18.927	15.95	15.75				
	5700	22.42	23.28	18.937	18.850	15.78	16.03				
	5720	22.27	23.16	18.877	18.895	15.78	16.07				
Mode 802.11ax- HE20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 3	5745	15.01	18.18	18.925	18.944	15.82	16.10	N/A	30	N/A	
	5785	17.62	16.33	18.968	18.910	15.86	16.10				
	5825	18.70	17.50	18.924	18.909	15.73	15.93				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 1	5190	41.36	41.74	37.640	37.510	15.59	15.50	N/A	24	N/A	
	5230	40.91	41.18	37.435	37.515	15.55	15.60				
U-NII Band 2A	5270	41.47	41.66	37.462	37.554	15.48	15.80				
	5310	41.44	40.89	37.536	37.469	15.60	15.80				
U-NII Band 2C	5510	41.43	41.83	37.408	37.474	15.63	15.41				
	5550	41.00	41.60	37.482	37.550	15.85	15.56				
	5670	40.34	41.12	37.576	37.460	15.84	16.05				
	5710	41.77	41.20	37.572	37.476	15.69	16.04				
Mode 802.11ax- HE40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
		Aux	Main	Aux	Main						
U-NII Band 3	5755	33.81	36.44	37.590	37.594	15.75	16.12	N/A	30	N/A	
	5795	35.52	36.90	37.596	37.461	15.69	16.13				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	82.53	83.37	76.609	76.866	14.18	13.59	N/A	24	N/A	
U-NII Band 2A	5290	82.35	83.98	76.821	76.727	14.18	14.20			30.16	
U-NII Band 2C	5530	82.36	83.26	76.708	76.734	13.95	13.81			30.16	
	5610	83.10	83.32	76.746	76.647	13.83	13.39			30.20	
	5690	82.22	82.22	76.715	76.529	14.12	14.04			30.15	

Mode 802.11ax- HE80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 3	5775	76.88	53.10	76.797	76.558	14.38	14.42	N/A	30	N/A	

Mode 802.11ax- HE160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	161.90	162.70	155.01	154.98	13.37	13.43	0.097	24	33.09	
U-NII Band 2C	5570	163.20	163.00	155.33	155.12	13.89	14.14			33.12	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) $10\log(1/X)$	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm+10 log B) ^{Note 3}	
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main					
			Aux	Main	Aux	Main							
U-NII Band 1	5180	26/0	23.60	23.48	18.943	18.979	9.18	9.59	N/A	12.40	24	N/A	
		52/37	23.60	23.48	18.943	18.979	12.13	12.60	N/A				15.38
		106/53	23.60	23.48	18.943	18.979	15.04	15.06	N/A				18.06
U-NII Band 2A	5320	26/8	22.58	22.71	18.893	18.912	9.13	9.49	N/A	12.32	24	24.54	
		52/40	22.58	22.71	18.893	18.912	12.22	12.55	N/A	15.40		24.54	
		106/54	22.58	22.71	18.893	18.912	14.91	15.40	N/A	18.17		24.54	
U-NII Band 2C	5500	26/0	22.38	23.69	18.923	18.940	9.63	9.85	N/A	12.75	24	24.50	
		52/37	22.38	23.69	18.923	18.940	12.60	12.85	N/A	15.74		24.50	
		106/53	22.38	23.69	18.923	18.940	14.88	15.01	N/A	17.96		24.50	
	5700	26/8	22.42	23.28	18.937	18.850	9.50	9.80	N/A	12.66		24.51	
		52/40	22.42	23.28	18.937	18.850	12.45	12.79	N/A	15.63		24.51	
		106/54	22.42	23.28	18.937	18.850	15.07	15.65	N/A	18.38		24.51	
U-NII Band 3	5745	26/0	15.01	18.18	18.925	18.944	15.56	16.18	N/A	18.89	30	N/A	
		52/37	15.01	18.18	18.925	18.944	15.53	16.22	N/A	18.90			
		106/53	15.01	18.18	18.925	18.944	15.49	16.18	N/A	18.86			
5825	26/8	18.70	17.50	18.924	18.909	15.53	16.00	N/A	18.78	30	N/A		
	52/40	18.70	17.50	18.924	18.909	15.55	16.02	N/A	18.80				
	106/54	18.70	17.50	18.924	18.909	15.42	16.00	N/A	18.73				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE40	Centre Frequenc y (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) $10\log(1/X)$	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5190	242/61	41.36	41.74	37.640	37.510	15.39	15.41	N/A	18.41	24	N/A
U-NII Band 2A	5310	242/62	41.44	40.89	37.536	37.469	15.29	15.71				27.12
U-NII Band 2C	5510	242/61	41.43	41.83	37.408	37.474	15.26	15.31				27.17
	5670	242/62	40.34	41.12	37.576	37.460	15.46	16.06				27.06
Mode 802.11ax- HE40	Centre Frequenc y (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) $10\log(1/X)$	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 3	5755	242/61	33.81	36.44	37.590	37.594	15.44	16.03	N/A	18.76	30	N/A
	5795	242/62	35.52	36.90	37.596	37.461	15.50	15.99				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5210	484/65	82.53	83.37	76.609	76.866	15.26	15.40	N/A	24	N/A	
U-NII Band 2A	5290	484/66	82.35	83.98	76.821	76.727	15.18	15.55			30.16	
U-NII Band 2C	5530	484/65	82.36	83.26	76.708	76.734	15.26	15.40			30.16	
	5610	484/66	83.10	83.32	76.746	76.647	15.42	15.91			30.20	
Mode 802.11ax- HE80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+10 log B) ^{Note 3}
Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
Aux	Main	Aux	Main									
U-NII Band 3	5775	484/65	76.88	53.10	76.797	76.558	15.50	16.06	N/A	30	N/A	
		484/66	76.88	53.10	76.797	76.558	15.51	16.04				

Mode 802.11ax- HE160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11 dBm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1/2A	5250	996/97	161.90	162.70	155.01	154.98	13.91	13.34	N/A	24	33.09	
		996/S67	161.90	162.70	155.01	154.98	13.91	14.12			33.09	
U-NII Band 2C	5570	996/97	163.20	163.00	155.33	155.12	13.88	13.70			33.12	
		996/S67	163.20	163.00	155.33	155.12	13.74	13.32			33.12	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11be- EHT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}						
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main										
		Aux	Main	Aux	Main												
U-NII Band 1	5180	23.25	23.58	18.919	18.928	15.45	15.44	N/A	24	N/A							
	5200	23.06	23.48	18.914	18.943	15.53	15.49										
	5240	23.25	22.23	18.862	19.020	15.30	15.68										
U-NII Band 2A	5260	23.69	22.23	18.978	18.955	15.31	15.69			N/A	24	24.47					
	5300	22.61	22.44	18.839	18.855	15.38	15.66					24.51					
	5320	23.64	22.57	18.942	18.845	15.33	15.72					24.54					
U-NII Band 2C	5500	23.14	23.39	18.878	18.951	15.32	15.33					N/A	24	24.64			
	5580	23.15	22.87	18.914	18.987	15.60	15.70							24.59			
	5700	23.59	23.66	18.979	18.903	15.40	15.96							24.73			
	5720	22.26	22.59	18.876	18.938	15.41	16.00							24.48			
Mode 802.11be- EHT20	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)								Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main										
		Aux	Main	Aux	Main												
U-NII Band 3	5745	17.46	17.86	18.888	18.915	15.46	15.99	N/A	30					N/A			
	5785	9.955	18.26	18.880	18.831	15.27	16.00										
	5825	18.22	18.75	18.916	18.885	15.20	15.83										

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11b-e- EHT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}			
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main	Aux	Main							
U-NII Band 1	5190	42.07	41.90	37.585	37.497	15.26	15.39	N/A	24	N/A				
	5230	41.82	42.39	37.482	37.423	15.17	15.46							
U-NII Band 2A	5270	41.46	42.09	37.674	37.587	15.08	15.61							
	5310	41.87	42.69	37.534	37.512	15.15	15.58							
U-NII Band 2C	5510	41.00	42.53	37.510	37.514	15.02	15.31							
	5550	40.82	42.20	37.592	37.536	15.23	15.47							
	5670	42.71	42.74	37.498	37.511	15.18	15.97							
	5710	41.02	42.50	37.550	37.462	15.07	15.96							
Mode 802.11b-e- EHT40	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)					Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
		Aux	Main	Aux	Main	Aux	Main							
U-NII Band 3	5755	35.38	34.92	37.471	37.491	15.08	16.00	N/A	30	N/A				
	5795	37.83	37.01	37.581	37.509	15.13	15.93							

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11be- EHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1	5210	82.65	82.50	76.687	76.554	14.07	13.64	N/A	24	N/A	
U-NII Band 2A	5290	82.23	82.50	76.682	76.722	14.24	14.28			30.15	
U-NII Band 2C	5530	82.58	84.41	76.649	76.762	14.07	13.87			30.17	
	5610	84.39	82.97	76.573	76.772	13.76	13.33			30.19	
	5690	82.39	82.26	76.727	76.569	14.23	14.13			30.15	
Mode 802.11be- EHT80	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dBm +10 log B) ^{Note 3}
Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)							
Aux	Main	Aux	Main	Aux	Main						
U-NII Band 3	5775	71.06	73.44	76.585	76.593	14.31	14.35	N/A	30	N/A	

Mode 802.11be- EHT160	Centre Frequency (MHz)	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
		Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Average Output Power (dBm)					
		Aux	Main	Aux	Main	Aux	Main				
U-NII Band 1/2A	5250	163.20	162.30	155.09	155.25	13.49	13.35	N/A	24	33.10	
U-NII Band 2C	5570	163.30	163.20	154.91	155.03	14.04	14.31			33.13	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11be- EHT20	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11dB m+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5180	26/0	23.25	23.56	18.919	18.928	9.26	9.58	N/A	12.43	24	N/A
		52/37	23.25	23.56	18.919	18.928	12.28	12.58	N/A	15.44		
		106/53	23.25	23.56	18.919	18.928	14.58	14.52	N/A	17.56		
U-NII Band 2A	5320	26/8	23.64	22.57	18.942	18.845	9.22	9.45	N/A	12.35	24	24.54
		52/40	23.64	22.57	18.942	18.845	12.28	12.53	N/A	15.42		
		106/54	23.64	22.57	18.942	18.845	14.46	14.86	N/A	17.67		
U-NII Band 2C	5500	26/0	23.14	23.39	18.878	18.951	9.70	9.83	N/A	12.78	24	24.64
		52/37	23.14	23.39	18.878	18.951	12.68	12.84	N/A	15.77		
		106/53	23.14	23.39	18.878	18.951	14.51	14.47	N/A	17.50		
	5700	26/8	23.59	23.66	18.979	18.903	9.54	9.81	N/A	12.69		
		52/40	23.59	23.66	18.979	18.903	12.46	12.77	N/A	15.63		
		106/54	23.59	23.66	18.979	18.903	15.12	15.62	N/A	18.39		
U-NII Band 3	5745	26/0	17.46	7.86	18.888	18.915	15.61	16.13	N/A	18.89	30	N/A
		52/37	17.46	7.86	18.888	18.915	15.62	16.16	N/A	18.91		
		106/53	17.46	7.86	18.888	18.915	15.61	16.15	N/A	18.90		
5825	26/8	18.22	18.75	18.916	18.885	15.60	15.94	N/A	18.78			
	52/40	18.22	18.75	18.916	18.885	15.63	16.00	N/A	18.83			
	106/54	18.22	18.75	18.916	18.885	15.60	15.98	N/A	18.80			

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11be- EHT40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5190	242/61	42.07	41.90	37.585	37.497	15.38	15.39	N/A	24	N/A	
U-NII Band 2A	5310	242/62	41.87	42.69	37.534	37.512	15.31	15.74				
U-NII Band 2C	5510	242/61	41.00	42.53	37.510	37.514	15.30	15.32				
	5670	242/62	42.71	42.74	37.498	37.511	15.52	16.06				
Mode 802.11be- EHT40	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
Aux	Main	Aux	Main									
U-NII Band 3	5755	242/61	35.38	34.92	37.471	37.491	15.43	16.04	N/A	30	N/A	
	5795	242/62	37.83	37.01	37.581	37.509	15.52	16.01				

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

Mode 802.11b-e EHT80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1	5210	484/65	82.65	82.50	76.687	76.554	16.52	16.78	N/A	24	N/A	
U-NII Band 2A	5290	484/66	82.23	82.50	76.682	76.722	16.63	16.77			30.15	
U-NII Band 2C	5530	484/65	82.58	84.41	76.649	76.762	16.86	17.07			30.17	
	5610	484/66	84.39	82.97	76.573	76.772	16.87	17.15			30.19	
Mode 802.11b-e EHT80	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
Emission (6dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main							
Aux	Main	Aux	Main									
U-NII Band 3	5775	484/65	71.06	73.44	76.585	76.593	16.75	17.04	N/A	30	N/A	
		484/66	71.06	73.44	76.585	76.593	16.80	17.08			19.95	

Mode 802.11b-e EHT160	Centre Frequency (MHz)	RU Configuration	Bandwidth(MHz)				Average Output Power (dBm)		Duty Cycle Factor (dB) 10log(1/X)	Total Average Output Power (dBm) ^{Note 2}	Limit (dBm)	Limit(11d Bm+10 log B) ^{Note 3}
			Emission (26dB) Bandwidth		Occupied (99%) Bandwidth		Aux	Main				
			Aux	Main	Aux	Main						
U-NII Band 1/2A	5250	996/97	163.20	162.30	155.09	155.25	13.89	13.49	N/A	24	33.10	
		996/S67	163.20	162.30	155.09	155.25	14.05	13.59			33.10	
U-NII Band 2C	5570	996/97	163.30	163.20	154.91	155.03	13.85	13.61			33.13	
		996/S67	163.30	163.20	154.91	155.03	13.85	13.41			16.65	33.13

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total average output power(dBm) = Sum to individual output power (dBm)+ duty cycle factor(dB) when duty cycle is less than 98%, please refer to section 3.7.

3. B is the 26 dB emission bandwidth.

A.3.2 Measurement Plots

- Maximum Output Power

